



---

# Complete Software Guide for Junos<sup>®</sup> OS for the QFX Series, Release 12.3

Release  
12.3



---

Published: 2013-03-01



Juniper Networks, Inc.  
1194 North Mathilda Avenue  
Sunnyvale, California 94089  
USA  
408-745-2000  
www.juniper.net

This product includes the Envoy SNMP Engine, developed by Epilogue Technology, an Integrated Systems Company. Copyright © 1986-1997, Epilogue Technology Corporation. All rights reserved. This program and its documentation were developed at private expense, and no part of them is in the public domain.

This product includes memory allocation software developed by Mark Moraes, copyright © 1988, 1989, 1993, University of Toronto.

This product includes FreeBSD software developed by the University of California, Berkeley, and its contributors. All of the documentation and software included in the 4.4BSD and 4.4BSD-Lite Releases is copyrighted by the Regents of the University of California. Copyright © 1979, 1980, 1983, 1986, 1988, 1989, 1991, 1992, 1993, 1994. The Regents of the University of California. All rights reserved.

GateD software copyright © 1995, the Regents of the University. All rights reserved. Gate Daemon was originated and developed through release 3.0 by Cornell University and its collaborators. Gated is based on Kirton's EGP, UC Berkeley's routing daemon (routed), and DCN's HELLO routing protocol. Development of Gated has been supported in part by the National Science Foundation. Portions of the GateD software copyright © 1988, Regents of the University of California. All rights reserved. Portions of the GateD software copyright © 1991, D. L. S. Associates.

This product includes software developed by Maker Communications, Inc., copyright © 1996, 1997, Maker Communications, Inc.

Juniper Networks, Junos, Steel-Belted Radius, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. The Juniper Networks Logo, the Junos logo, and JunosE are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

Products made or sold by Juniper Networks or components thereof might be covered by one or more of the following patents that are owned by or licensed to Juniper Networks: U.S. Patent Nos. 5,473,599, 5,905,725, 5,909,440, 6,192,051, 6,333,650, 6,359,479, 6,406,312, 6,429,706, 6,459,579, 6,493,347, 6,538,518, 6,538,899, 6,552,918, 6,567,902, 6,578,186, and 6,590,785.

*Complete Software Guide for Junos® OS for the QFX Series, Release 12.3*

Release 12.3

Copyright © 2013, Juniper Networks, Inc.

All rights reserved.

The information in this document is current as of the date on the title page.

## YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

## END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <http://www.juniper.net/support/eula.html>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.



# Table of Contents

	About the Documentation . . . . .	cix
	Documentation and Release Notes . . . . .	cix
	Supported Platforms . . . . .	cix
	Using the Examples in This Manual . . . . .	cix
	Merging a Full Example . . . . .	cx
	Merging a Snippet . . . . .	cx
	Documentation Conventions . . . . .	cxi
	Documentation Feedback . . . . .	cxiii
	Requesting Technical Support . . . . .	cxiii
	Self-Help Online Tools and Resources . . . . .	cxiii
	Opening a Case with JTAC . . . . .	cxiv
<b>Part 1</b>	<b>QFX3500 Switch Overview</b>	
<b>Chapter 1</b>	<b>QFX3500 Switch Overview . . . . .</b>	<b>3</b>
	QFX3500 Device Overview . . . . .	3
	Software . . . . .	3
	Hardware . . . . .	4
	SFP+ Access Ports . . . . .	5
	QSFP+ Uplink Ports . . . . .	6
<b>Part 2</b>	<b>QFX3600 Switch Overview</b>	
<b>Chapter 2</b>	<b>QFX3600 Switch Overview . . . . .</b>	<b>9</b>
	QFX3600 Device Overview . . . . .	9
	Software . . . . .	9
	Hardware . . . . .	10
<b>Part 3</b>	<b>Junos OS Basics</b>	
<b>Chapter 3</b>	<b>Overview . . . . .</b>	<b>15</b>
	Software Overview . . . . .	15
	QFX Series Software Features Overview . . . . .	15
	Configuration File Terms . . . . .	29
	Format for Specifying IP Addresses, Network Masks, and Prefixes in Junos	
	OS Configuration Statements . . . . .	30
	Junos OS Commit Model for Router or Switch Configuration . . . . .	31
	Junos OS Package Names . . . . .	32
	NTP Time Server and Time Services Overview . . . . .	33
	NTP Time Server and Time Services Overview (QFabric System) . . . . .	34



Overview of CoS Upgrade Requirements (Junos OS Release 11.1 or 11.2 to a Later Release) . . . . .	34
Understanding Autoinstallation of Configuration Files . . . . .	36
Typical Uses for Autoinstallation . . . . .	36
Autoinstallation Configuration Files and IP Addresses . . . . .	36
Typical Autoinstallation Process on a New Switch . . . . .	37
Understanding Zero Touch Provisioning . . . . .	38
Understanding DHCP Services for Switches . . . . .	39
DHCP Client/Server Model . . . . .	40
Using DHCP . . . . .	40
DHCP Relay Servers and DHCP Servers . . . . .	41
Legacy DHCP and Extended DHCP for Server Versions . . . . .	41
Configuring DHCP on a Switch . . . . .	42
How DHCP Works . . . . .	42
Understanding Software Infrastructure and Processes . . . . .	43
Routing Engine and Packet Forwarding Engine . . . . .	43
Junos OS Processes . . . . .	44
User Interfaces . . . . .	45
CLI User Interface Overview . . . . .	46
CLI Overview . . . . .	46
CLI Key Features . . . . .	46
CLI Command Modes . . . . .	47
Configuring CLI Tips . . . . .	48
Format for Specifying Filenames and URLs in Junos OS CLI Commands . . . . .	48
Junos OS Operational Mode Commands That Combine Other Commands . . . . .	50
Overview of Junos OS CLI Operational Mode Commands . . . . .	51
CLI Command Categories . . . . .	51
Commonly Used Operational Mode Commands . . . . .	52
Overview of Navigating the CLI . . . . .	53
CLI Command Hierarchy . . . . .	54
CLI Configuration Statements . . . . .	54
Moving Among Hierarchy Levels . . . . .	54
Understanding the Brief, Detail, Extensive, and Terse Options of Junos OS Operational Commands . . . . .	55
Understanding Junos OS CLI Configuration Mode . . . . .	56
Configuration Mode Commands . . . . .	57
Configuration Statements and Identifiers . . . . .	58
Configuration Statement Hierarchy . . . . .	60
Licenses . . . . .	62
Junos OS Feature Licenses . . . . .	62
Software Features That Require Licenses on the QFX Series . . . . .	63
Junos OS License Keys . . . . .	64
Licensable Ports on MX5, MX10, and MX40 Routers . . . . .	64
Generating the License Keys for a Standalone QFX Series Device . . . . .	66
Generating the License Keys for a QFabric System . . . . .	67
Adding New Licenses (CLI Procedure) . . . . .	69
Deleting a License (CLI Procedure) . . . . .	70



	Saving License Keys . . . . .	71
	Verifying Junos OS License Installation . . . . .	71
	Displaying Installed Licenses . . . . .	72
	Displaying License Usage . . . . .	73
<b>Chapter 4</b>	<b>Installation . . . . .</b>	<b>75</b>
	Software Installation . . . . .	75
	Junos OS Package Names . . . . .	75
	Configuring Zero Touch Provisioning . . . . .	77
	Performing a Nonstop Software Upgrade on the QFabric System . . . . .	80
	Backing Up the Current Configuration Files . . . . .	81
	Downloading Software Files Using a Browser . . . . .	81
	Retrieving Software Files for Download . . . . .	83
	Performing a Nonstop Software Upgrade for Director Devices in a Director Group . . . . .	83
	Performing a Nonstop Software Upgrade for Interconnect Devices and Other Fabric-Related Components . . . . .	83
	(Optional) Creating Upgrade Groups for Node Groups . . . . .	84
	Performing a Nonstop Software Upgrade on a Node Group . . . . .	84
	Performing a Recovery Installation on a QFX3008-I, QFX3600-I, QFX3600, or QFX3500 Device . . . . .	85
	Performing a QFabric System Recovery Installation on the Director Group . . . . .	87
	(Optional) Creating an Emergency Boot Device Using a Juniper Networks External Blank USB Flash Drive . . . . .	88
	Performing a Recovery Installation Using a Juniper Networks External USB Flash Drive with Preloaded Software . . . . .	89
	Recovering from a Failed Software Installation . . . . .	93
	Software Installation Overview . . . . .	94
	Upgrading Jloader Software on QFX Series Devices . . . . .	95
	Jloader Software Version 1.1.4 Guidelines . . . . .	96
	Upgrading Jloader Software on a QFX3500 Switch . . . . .	98
	Upgrading Jloader Software on a QFabric System . . . . .	101
	Upgrading Software on QFX3500 and QFX3600 Standalone Switches . . . . .	107
	Downloading Software Files with a Browser . . . . .	107
	Accessing Software Downloaded to a Remote Location . . . . .	108
	Connecting to the Console Port . . . . .	108
	Backing Up the Current Configuration Files . . . . .	108
	Installing the Software Package . . . . .	108
	Upgrading Software on a QFabric System . . . . .	109
	Backing Up the Current Configuration Files . . . . .	110
	Downloading Software Files Using a Browser . . . . .	110
	Retrieving Software Files for Download . . . . .	111
	Installing the Software Package on the Entire QFabric System . . . . .	111
	Upgrading Software Using Automatic Software Download . . . . .	114
	Verifying Autoinstallation Status . . . . .	115
	Verifying That Automatic Software Download Is Working Correctly . . . . .	115



<b>Chapter 5</b>	<b>Configuration</b>	<b>117</b>
	Initial Configuration	117
	Configuring Autoinstallation of Configuration Files (CLI Procedure)	118
	Configuring a DHCP Client (CLI Procedure)	120
	Configuring a DHCP Server on Switches (CLI Procedure)	121
	Configuring an Extended DHCP Server on a Switch	121
	Configuring a Legacy DHCP Server on a Switch (CLI Procedure)	122
	Configuring a DNS Name Server for Resolving a Hostname into Addresses	123
	Configuring the Domain Name for the Router or Switch	124
	Configuring the Domains to Search When a Router or Switch Is Included in Multiple Domains	124
	Configuring the Hostname of the Router or Switch	125
	Configuring the Junos OS to Determine Conditions That Trigger Alarms on Different Interface Types	125
	Configuring the Junos OS to Disable Protocol Redirect Messages on the Router or Switch	126
	Configuring the Junos OS to Disable the Reporting of IP Address and Timestamps in Ping Responses	126
	Configuring the Junos OS to Display a System Login Announcement	127
	Configuring the Junos OS to Display a System Login Message	127
	Configuring the Junos OS to Extend the Default Port Address Range	128
	Configuring the Junos OS ICMPv4 Rate Limit for ICMPv4 Routing Engine Messages	129
	Configuring the Junos OS to Select a Fixed Source Address for Locally Generated TCP/IP Packets	129
	Configuring NTP Authentication Keys	129
	Configuring NTP Authentication Keys (QFabric System)	130
	Configuring the NTP Time Server and Time Services	131
	Configuring the Router or Switch to Operate in Client Mode	131
	Configuring the Router or Switch to Operate in Symmetric Active Mode	132
	Configuring the Router or Switch to Operate in Broadcast Mode	132
	Configuring the Router or Switch to Operate in Server Mode	132
	Configuring the NTP Time Server and Time Services (QFabric System)	133
	Specifying the Physical Location of the Switch	134
	Configuring the Router or Switch to Listen for Broadcast Messages Using NTP	135
	Configuring the Router or Switch to Listen for Multicast Messages Using NTP	135
	Configuring System Alarms to Appear Automatically Upon Login	136
	Configuring Time-Based User Access	136
	Configuring the Timeout Value for Idle Login Sessions	137
	Configuring a QFX3500 Device as a Standalone Switch	138
	Creating an Emergency Boot Device for a QFX Series Device	140



Creating a Snapshot and Using It to Boot a QFX Series Switch . . . . .	141
Creating a Snapshot on a USB Flash Drive and Using It to Boot the Switch . . . . .	141
Creating a Snapshot on an Internal Flash Drive and Using it to Boot the Switch . . . . .	142
Including the Year or Millisecond in Timestamps . . . . .	142
Mapping the Hostname of the Switch to IP Addresses . . . . .	143
Methods for Configuring Junos OS . . . . .	144
Junos OS Command-Line Interface (CLI) . . . . .	145
ASCII File . . . . .	145
J-Web Package . . . . .	145
Junos XML Management Protocol Software . . . . .	146
NETCONF XML Management Protocol Software . . . . .	146
Configuration Commit Scripts . . . . .	146
Modifying the Default Time Zone for a Router or Switch Running Junos OS . . . . .	147
Rebooting and Halting a QFX Series Product . . . . .	147
Reverting to the Default Factory Configuration . . . . .	148
Reverting to the Default Factory Configuration by Using the request system zeroize Command . . . . .	149
Reverting to the Rescue Configuration . . . . .	150
Saving Core Files Generated by Junos OS Processes . . . . .	150
Setting a Custom Time Zone on Routers or Switches Running Junos OS . . . . .	150
Importing and Installing Time Zone Files . . . . .	151
Configuring a Custom Time Zone . . . . .	152
Setting the Date and Time . . . . .	152
Specifying Access Privileges for Junos OS Operational Mode Commands . . . . .	153
Synchronizing and Coordinating Time Distribution Using NTP . . . . .	155
Configuring NTP . . . . .	155
Configuring the NTP Boot Server . . . . .	155
Specifying a Source Address for an NTP Server . . . . .	155
Viewing Core Files from Junos OS Processes . . . . .	156
Configuration Examples . . . . .	157
Example: Configuring the Domain Name for the Router or Switch . . . . .	157
Example: Configuring the Name of the Switch, IP Address, and System ID . . . . .	157
Example: Configuring NTP . . . . .	158
Example: Configuring NTP as a Single Time Source for Router and Switch Clock Synchronization . . . . .	160
Configuration Statements . . . . .	161
QFX Series CLI Hierarchy . . . . .	161
[edit access] Hierarchy . . . . .	162
[edit accounting-options] Hierarchy . . . . .	162
[edit chassis] Hierarchy . . . . .	164
[edit class-of-service] Hierarchy . . . . .	165
[edit ethernet-switching-options] Hierarchy . . . . .	168
[edit fabric] Hierarchy . . . . .	169
[edit fc-fabrics] Hierarchy . . . . .	170



[edit fc-options] Hierarchy .....	171
[edit firewall] Hierarchy .....	171
[edit groups] Hierarchy .....	172
[edit interfaces] Hierarchy .....	172
[edit policy-options] Hierarchy .....	178
[edit protocols] Hierarchy .....	178
[edit security] Hierarchy .....	191
[edit snmp] Hierarchy .....	191
[edit system] Hierarchy .....	194
[edit vlans] Hierarchy .....	199
access-end .....	200
access-start .....	200
accounting .....	201
accounting-port .....	202
allow-commands .....	202
allow-configuration .....	203
allowed-days .....	203
allow-transients .....	204
announcement .....	204
archival .....	205
arp (System) .....	206
authentication (Login) .....	207
authentication-key .....	208
authentication-order .....	209
auxiliary .....	210
boot-server (NTP) .....	211
broadcast .....	212
broadcast-client .....	213
change-type .....	213
checksum .....	214
class (Defining Login Classes) .....	215
class (Assigning a Class to an Individual User) .....	216
commit .....	217
compress-configuration-files (System) .....	218
console (Physical Port) .....	219
default-address-selection .....	220
deny-commands .....	221
deny-configuration .....	222
destination (Accounting) .....	223
destination-override .....	224
direct-access .....	224
domain-name .....	225
domain-search .....	225
explicit-priority .....	226
events .....	227
format .....	227
host-name .....	228
icmpv4-rate-limit .....	228
idle-timeout .....	229



internet-options	229
load-key-file	230
location	231
login	232
login-alarms	233
login-tip	233
max-configurations-on-flash	234
maximum-length	234
message	235
minimum-changes	235
minimum-length	236
multicast-client	236
name-server	237
no-multicast-echo	238
no-ping-record-route	239
no-ping-time-stamp	239
no-redirects (IPv4 Traffic)	240
ntp	241
ntp (QFabric)	241
optional	242
password (Login)	242
peer	243
permissions	244
port (TACACS+ Server)	244
ports	245
radius (System)	246
refresh (Commit Scripts)	247
refresh-from (Commit Scripts)	247
retry	248
retry-options	249
root-authentication	250
saved-core-context	251
saved-core-files	251
secret	252
server (NTP)	253
server (RADIUS Accounting)	254
server (TACACS+ Accounting)	254
single-connection	255
source (Commit Scripts)	255
source-address (NTP, RADIUS, System Logging, or TACACS+)	256
source-port (Port Addresses)	256
static-host-mapping	257
structured-data	258
syslog (System)	259
system	261
tacplus	266
tacplus-server	267
time-format	268
timeout	269



	time-zone .....	270
	traceoptions (Commit Scripts) .....	272
	tracing .....	274
	trusted-key .....	275
	uid .....	275
	use-imported-time-zones .....	276
	user (Access) .....	276
<b>Chapter 6</b>	<b>Administration .....</b>	<b>277</b>
	Routine Monitoring .....	277
	Monitoring System Process Information .....	277
	Monitoring System Properties .....	278
	Monitoring Interface Status and Traffic .....	279
	Other Tools to Configure and Monitor Devices Running Junos OS .....	280
	Operational Commands .....	280
	commit .....	281
	clear log .....	286
	clear chassis display message .....	287
	clear system commit .....	289
	clear system reboot .....	290
	file .....	293
	file archive .....	294
	file checksum md5 .....	296
	file checksum sha1 .....	297
	file checksum sha-256 .....	298
	file compare .....	299
	file delete .....	302
	file list .....	303
	file rename .....	305
	file show .....	307
	load .....	309
	ping .....	311
	request chassis beacon .....	315
	request chassis cb .....	317
	request chassis fpc .....	320
	request chassis routing-engine master .....	324
	request message .....	328
	request system configuration rescue delete .....	329
	request system configuration rescue save .....	330
	request system halt .....	331
	request system license add .....	336
	request system license delete .....	337
	request system license save .....	338
	request system logout .....	339
	request system power-off .....	340
	request system reboot .....	344
	request system snapshot .....	347
	request system software add .....	348
	request system software configuration-backup .....	356



request system software configuration-restore . . . . .	357
request system software delete . . . . .	358
request system software download . . . . .	361
request system software nonstop-upgrade . . . . .	363
request system software rollback . . . . .	370
request system software validate . . . . .	374
request system storage cleanup . . . . .	377
request system zeroize . . . . .	387
restart . . . . .	393
rollback . . . . .	403
save . . . . .	404
show chassis alarms . . . . .	406
show chassis beacon . . . . .	419
show chassis ethernet-switch interconnect-device fpc . . . . .	421
show chassis ethernet-switch interconnect-device cb . . . . .	448
show chassis environment . . . . .	466
show chassis environment cb . . . . .	517
show chassis environment fpc . . . . .	535
show chassis environment pem . . . . .	563
show chassis environment routing-engine . . . . .	572
show chassis fan . . . . .	577
show chassis firmware . . . . .	588
show chassis fpc . . . . .	599
show chassis hardware . . . . .	628
show chassis lcd . . . . .	735
show chassis led . . . . .	746
show chassis location . . . . .	757
show chassis mac-addresses . . . . .	761
show chassis nonstop-upgrade node-group . . . . .	767
show chassis pic . . . . .	768
show chassis routing-engine . . . . .	781
show chassis temperature-thresholds . . . . .	801
show chassis zones . . . . .	816
show cli . . . . .	822
show cli authorization . . . . .	824
show cli directory . . . . .	827
show cli history . . . . .	828
show host . . . . .	829
show interfaces diagnostics optics . . . . .	830
show log . . . . .	837
show ntp associations . . . . .	840
show ntp status . . . . .	842
show subscribers . . . . .	844
show system alarms . . . . .	861
show system audit . . . . .	862
show system boot-messages . . . . .	869
show system buffers . . . . .	876
show system certificate . . . . .	882
show system commit . . . . .	884



	show system configuration archival . . . . .	886
	show system configuration rescue . . . . .	887
	show system connections . . . . .	889
	show system core-dumps . . . . .	909
	show system directory-usage . . . . .	923
	show system license . . . . .	927
	show system processes . . . . .	931
	show system reboot . . . . .	959
	show system resource-cleanup processes . . . . .	962
	show system rollback . . . . .	964
	show system services service-deployment . . . . .	966
	show system software . . . . .	967
	show system statistics . . . . .	975
	show system storage . . . . .	1011
	show system uptime . . . . .	1017
	show system users . . . . .	1022
	show system virtual-memory . . . . .	1027
	show version . . . . .	1085
	start shell . . . . .	1093
	test configuration . . . . .	1095
	traceroute . . . . .	1096
	traceroute monitor . . . . .	1100
<b>Chapter 7</b>	<b>Troubleshooting . . . . .</b>	<b>1103</b>
	Troubleshooting Procedures . . . . .	1103
	Rebooting and Halting a QFX Series Product . . . . .	1103
	Recovering from a Failed Software Installation . . . . .	1104
	Recovering the Root Password . . . . .	1105
	Troubleshooting Network Interfaces . . . . .	1106
	The interface on the port in which an SFP or SFP+ transceiver is installed in an SFP or SFP+ module is down . . . . .	1106
	Troubleshooting an Aggregated Ethernet Interface . . . . .	1107
<b>Part 4</b>	<b>Configuration and File Management</b>	
<b>Chapter 8</b>	<b>Overview . . . . .</b>	<b>1111</b>
	Configuration Files Overview . . . . .	1111
	Configuration File Terms . . . . .	1111
	Software Overview . . . . .	1112
	Junos OS Commit Model for Router or Switch Configuration . . . . .	1112
	Understanding Configuration Files . . . . .	1113
	Understanding How the Junos Configuration Is Stored . . . . .	1113
<b>Chapter 9</b>	<b>Configuration . . . . .</b>	<b>1115</b>
	Configuration Tasks . . . . .	1115
	Comparing Configuration Changes with a Prior Version . . . . .	1115
	Compressing the Current Configuration File . . . . .	1117
	Creating and Returning to a Rescue Configuration . . . . .	1118
	Loading a Configuration from a File . . . . .	1119
	Loading a Previous Configuration File . . . . .	1122



Returning to the Most Recently Committed Junos Configuration . . . . .	1122
Returning to a Previously Committed Junos OS Configuration . . . . .	1123
Returning to a Configuration Prior to the One Most Recently Committed . . . . .	1123
Displaying Previous Configurations . . . . .	1123
Comparing Configuration Changes with a Prior Version . . . . .	1124
Creating and Returning to a Rescue Configuration . . . . .	1126
Saving a Configuration to a File . . . . .	1127
Reverting to the Default Factory Configuration . . . . .	1128
Reverting to the Rescue Configuration . . . . .	1128
Rolling Back Junos OS Configuration Changes . . . . .	1129
Saving a Configuration to a File . . . . .	1130
Setting or Deleting the Rescue Configuration . . . . .	1131
Uploading a Configuration File . . . . .	1131
Using Junos OS to Configure a Router or Switch to Transfer Its Configuration to an Archive Site . . . . .	1133
Configuring the Router or Switch to Transfer Its Currently Active Configuration to an Archive . . . . .	1133
Configuring the Transfer Interval for Periodic Transfer of the Active Configuration to an Archive Site . . . . .	1134
Configuring Transfer of the Current Active Configuration When a Configuration Is Committed . . . . .	1134
Configuring Archive Sites for Transfer of Active Configuration Files . . . . .	1134
Configuration Statements . . . . .	1136
archival . . . . .	1136
archive-sites (Configuration File) . . . . .	1137
configuration . . . . .	1138
transfer-interval (Configuration) . . . . .	1139
transfer-on-commit . . . . .	1140
Default Configurations . . . . .	1140
QFX3500 Switch Default Configuration . . . . .	1140
Configuration Examples . . . . .	1146
Examples: Loading a Configuration from a File . . . . .	1146
<b>Chapter 10 Administration . . . . .</b>	<b>1149</b>
Operational Commands . . . . .	1149
clear log . . . . .	1150
clear system commit . . . . .	1151
file archive . . . . .	1152
file checksum md5 . . . . .	1154
file checksum sha1 . . . . .	1155
file checksum sha-256 . . . . .	1156
file compare . . . . .	1157
file delete . . . . .	1160
file list . . . . .	1161
file rename . . . . .	1163
file show . . . . .	1165
request system configuration rescue delete . . . . .	1167
request system configuration rescue save . . . . .	1168



	show system commit . . . . .	1169
	show system configuration archival . . . . .	1171
	show system configuration rescue . . . . .	1172
	show system rollback . . . . .	1174
	test configuration . . . . .	1176
<b>Chapter 11</b>	<b>Troubleshooting . . . . .</b>	<b>1177</b>
	Troubleshooting Procedures . . . . .	1177
	Loading a Previous Configuration File . . . . .	1177
	Reverting to the Default Factory Configuration . . . . .	1178
	Reverting to the Rescue Configuration . . . . .	1178
<b>Part 5</b>	<b>User and Access Management</b>	
<b>Chapter 12</b>	<b>Overview . . . . .</b>	<b>1181</b>
	Software Overview . . . . .	1181
	Understanding Software Infrastructure and Processes . . . . .	1181
	Routing Engine and Packet Forwarding Engine . . . . .	1181
	Junos OS Processes . . . . .	1182
	Understanding User and Access Management Features on the QFabric System . . . . .	1183
	Access Control Overview . . . . .	1184
	Overview of Template Accounts for RADIUS and TACACS+ Authentication . . . . .	1185
	Understanding Login Authentication . . . . .	1185
	MAC RADIUS Authentication . . . . .	1185
	Understanding LLDP . . . . .	1186
	Understanding RADIUS Accounting . . . . .	1187
	Understanding VSAs on the QFX Series . . . . .	1188
	Juniper Networks Vendor-Specific RADIUS Attributes . . . . .	1188
	Juniper Networks Vendor-Specific TACACS+ Attributes . . . . .	1190
	Understanding Junos OS Access Privilege Levels . . . . .	1192
	Junos OS Login Class Permission Flags . . . . .	1192
	Allowing or Denying Individual Commands for Junos OS Login Classes . . . . .	1195
	Junos OS Authentication Order for RADIUS, TACACS+, and Password Authentication . . . . .	1196
	Using RADIUS or TACACS+ Authentication . . . . .	1196
	Using Local Password Authentication . . . . .	1197
	Order of Authentication Attempts . . . . .	1197
	Junos OS User Authentication Methods . . . . .	1201
	Junos OS User Accounts Overview . . . . .	1201
	Junos OS Login Classes Overview . . . . .	1203
	Understanding QFabric System Login Classes . . . . .	1204
	Regular Expressions for Allowing and Denying Junos OS Configuration Mode Hierarchies . . . . .	1205
	Regular Expressions for Allowing and Denying Junos OS Operational Mode Commands . . . . .	1206
	Special Requirements for Junos OS Plain-Text Passwords . . . . .	1207



<b>Chapter 13</b>	<b>Configuration</b>	<b>1211</b>
	Configuration Tasks	1211
	Changing the Requirements for Junos OS Plain-Text Passwords	1212
	Configuring Access Privilege Levels	1212
	Configuring CLI Tips	1212
	Configuring Junos OS User Accounts	1213
	Configuring LLDP	1214
	Configuring the Junos OS Authentication Order for RADIUS, TACACS+, and Local Password Authentication	1214
	Configuring Local User Template Accounts for User Authentication	1215
	Configuring Management Access	1217
	Configuring RADIUS Accounting	1217
	Configuring RADIUS Authentication	1219
	Configuring RADIUS Server Details	1219
	Configuring MS-CHAPv2 for Password-Change Support	1220
	Specifying a Source Address for the Junos OS to Access External RADIUS Servers	1220
	Configuring Remote Template Accounts for User Authentication	1221
	Configuring the Root Password	1222
	Configuring SNMP	1223
	Configuring SSH Host Keys for Secure Copying of Data	1227
	Configuring SSH Known Hosts	1227
	Configuring Support for SCP File Transfer	1228
	Updating SSH Host Key Information	1228
	Configuring SSH Service for Remote Access to the Router or Switch	1229
	Configuring the Root Login Through SSH	1230
	Configuring the SSH Protocol Version	1230
	Configuring the Client Alive Mechanism	1230
	Configuring TACACS+ Authentication	1231
	Configuring TACACS+ Server Details	1231
	Specifying a Source Address for the Junos OS to Access External TACACS+ Servers	1232
	Configuring the Same Authentication Service for Multiple TACACS+ Servers	1232
	Configuring Juniper Networks Vendor-Specific TACACS+ Attributes	1233
	Configuring TACACS+ System Accounting	1233
	Specifying TACACS+ Auditing and Accounting Events	1234
	Configuring TACACS+ Server Accounting	1234
	Defining Junos OS Login Classes	1235
	Limiting the Number of User Login Attempts for SSH and Telnet Sessions	1236
	Recovering the Root Password	1237
	Specifying Access Privileges for Junos OS Configuration Mode Hierarchies	1238
	Specifying Access Privileges for Junos OS Operational Mode Commands	1239



Using Junos OS to Configure Logical System Administrators . . . . .	1241
Using Regular Expressions on a RADIUS or TACACS+ Server to Allow or Deny Access to Commands . . . . .	1242
VSA Match Conditions and Actions . . . . .	1243
Configuration Examples . . . . .	1245
Example: Configuring Access Privilege Levels . . . . .	1246
Example: Configuring Access Privileges for Operational Mode Commands . . . . .	1246
Example: Configuring a Plain-Text Password for Root Logins . . . . .	1247
Example: Configuring RADIUS Authentication . . . . .	1247
Example: Configuring RADIUS System Accounting . . . . .	1248
Example: Configuring the Root Password . . . . .	1249
Example: Configuring SSH Authentication for Root Logins . . . . .	1249
Example: Configuring User Accounts . . . . .	1250
Example: Configuring System Authentication for RADIUS, TACACS+, and Password Authentication . . . . .	1251
Example: Creating Login Classes with Specific Privileges . . . . .	1252
Example: Configuring QFabric System Login Classes . . . . .	1253
Example: Configuring User Login Accounts . . . . .	1261
Example: Configuring RADIUS Template Accounts . . . . .	1261
Defining Access Privileges Using allow/deny-configuration Statements . .	1262
Example: Limiting the Number of Login Attempts for SSH and Telnet Sessions . . . . .	1263
Configuration Statements . . . . .	1264
access . . . . .	1264
accounting . . . . .	1265
accounting-options . . . . .	1266
accounting-server . . . . .	1268
accounting-stop-on-access-deny . . . . .	1269
accounting-stop-on-failure . . . . .	1270
advertisement-interval . . . . .	1271
agent-address . . . . .	1272
archival . . . . .	1273
archive-sites (Configuration File) . . . . .	1274
authentication-order . . . . .	1275
authentication-server . . . . .	1276
authorization . . . . .	1277
categories . . . . .	1278
client-list . . . . .	1278
client-list-name . . . . .	1279
clients . . . . .	1279
commit-delay . . . . .	1280
community (SNMP) . . . . .	1281
configuration . . . . .	1282
connection-limit . . . . .	1283
contact . . . . .	1284
disable (LLDP) . . . . .	1284
ethernet-switching-options . . . . .	1285
falling-threshold (Health Monitor) . . . . .	1287



filter-duplicates	1287
full-name	1288
health-monitor	1288
hold-multiplier	1289
idle-timeout (Access)	1290
interface (LLDP)	1291
interval (Health Monitor)	1292
lldp	1293
lldp-configuration-notification-interval	1294
location	1294
management-address	1295
name	1295
nas-ip-address	1296
nonvolatile	1296
oid	1297
order	1298
port (RADIUS Server)	1299
profile	1300
protocols	1301
protocol-version	1314
ptopo-configuration-maximum-hold-time	1314
ptopo-configuration-trap-interval	1315
radius	1316
radius-options (edit system)	1317
radius-server	1318
rate-limit	1319
remote-debug-permission	1320
retry	1321
rising-threshold (Health Monitor)	1322
root-login	1323
services (Switches)	1324
snmp	1325
source-address (SNMP)	1329
ssh	1330
tacplus-options	1331
targets	1332
traceoptions (LLDP)	1333
transfer-interval (Configuration)	1335
transfer-on-commit	1336
trap-group	1337
trap-options	1338
user (Access)	1339
version	1340



<b>Chapter 14</b>	<b>Administration .....</b>	<b>1341</b>
	Routine Monitoring .....	1341
	Monitoring SNMP .....	1341
	Monitoring Commands .....	1342
	clear lldp neighbors .....	1343
	clear lldp statistics .....	1344
	request component login .....	1345
	show ethernet-switching interfaces .....	1347
	show lldp .....	1351
	show lldp local-information .....	1357
	show lldp neighbors .....	1359
	show lldp statistics .....	1364
	show route instance .....	1366
	show snmp statistics .....	1370
	ssh .....	1374
 <b>Part 6</b>	 <b>Ethernet Features</b>	
<b>Chapter 15</b>	<b>Overview .....</b>	<b>1379</b>
	Software Features Overview .....	1379
	Overview of Layer 2 Networking .....	1379
	Understanding Bridging .....	1381
	Understanding Unicast .....	1383
	Introduction to the Media Access Control (MAC) Layer 2 Sublayer .....	1383
	Understanding Layer 2 Broadcasting .....	1384
	Bridging and VLANs .....	1384
	Understanding VLANs .....	1385
	Introduction to VLANs .....	1385
	VLAN Tagging .....	1386
	Assigning Traffic to a VLAN .....	1386
	Ethernet Switching Tables .....	1386
	Layer 2 and Layer 3 Forwarding of VLAN Traffic .....	1386
	Understanding Routed VLAN Interfaces .....	1386
	Understanding MAC Learning .....	1388
	Understanding Reflective Relay for Use with VEPA Technology .....	1388
	VEPA .....	1389
	Reflective Relay .....	1389
	Understanding Private VLANs .....	1389
	Typical Structure and Primary Application of PVLANS .....	1390
	Using 802.1Q Tags to Identify Packets .....	1392
	Efficient Use of IP Addresses .....	1393
	PVLAN Port Types .....	1393
	Limitations of Private VLANs .....	1395
	Understanding PVLAN Traffic Flows Across Multiple Switches .....	1395
	Community VLAN Sending Untagged Traffic .....	1395
	Isolated VLAN Sending Untagged Traffic .....	1396



PVLAN Tagged Traffic Sent on a Promiscuous Port . . . . .	1397
Understanding Secondary VLAN Trunk Ports and Promiscuous Access Ports on PVLANS . . . . .	1399
PVLAN Port Types . . . . .	1399
Secondary VLAN Trunk Port Details . . . . .	1400
Use Cases . . . . .	1401
Understanding Egress Firewall Filters with PVLANS . . . . .	1408
Spanning Trees Overview . . . . .	1409
Overview of Spanning-Tree Protocols . . . . .	1409
Understanding Spanning Tree Protocols on a QFabric System . . . . .	1410
Understanding MSTP . . . . .	1410
Understanding RSTP . . . . .	1411
Understanding VSTP . . . . .	1412
Understanding BPDU Protection for STP, RSTP, and MSTP . . . . .	1413
Understanding Loop Protection for STP, RSTP, VSTP, and MSTP . . . . .	1414
Understanding Root Protection for STP, RSTP, VSTP, and MSTP . . . . .	1415
Q-in-Q Tunneling . . . . .	1416
Understanding Q-in-Q Tunneling and VLAN Translation . . . . .	1416
How Q-in-Q Tunneling Works . . . . .	1416
How VLAN Translation Works . . . . .	1417
Mapping C-VLANs to S-VLANs . . . . .	1417
Routed VLAN Interfaces on Q-in-Q VLANs . . . . .	1418
Constraints for Q-in-Q Tunneling and VLAN Translation . . . . .	1418
Layer 2 Protocol Tunneling . . . . .	1419
Understanding Layer 2 Protocol Tunneling . . . . .	1419
Layer 2 Protocols Supported by L2PT . . . . .	1420
How L2PT Works . . . . .	1421
L2PT Basics . . . . .	1423
Proxy ARP . . . . .	1423
Understanding Proxy ARP . . . . .	1424
What Is ARP? . . . . .	1424
Proxy ARP Overview . . . . .	1424
Best Practices for Proxy ARP . . . . .	1425
<b>Chapter 16 Configuration . . . . .</b>	<b>1427</b>
Configuration Examples . . . . .	1427
Example: Configuring Faster Convergence and Improving Network Stability with RSTP . . . . .	1428
Example: Configuring Network Regions for VLANs with MSTP . . . . .	1441
Example: Configuring Reflective Relay for Use with VEPA Technology . . . . .	1462
Example: Setting Up Basic Bridging and a VLAN on the QFX Series . . . . .	1467
Example: Setting Up Bridging with Multiple VLANs . . . . .	1476
Example: Configuring Routing Between VLANs on One Switch . . . . .	1481
Example: Connecting an Access Switch to a Distribution Switch . . . . .	1487
Example: Configuring BPDU Protection on STP Interfaces to Prevent STP Miscalculations . . . . .	1495
Example: Configuring Root Protection to Enforce Root Bridge Placement in Spanning Trees . . . . .	1499



Example: Configuring Loop Protection to Prevent Interfaces from Transitioning from Blocking to Forwarding in a Spanning Tree . . . . .	1504
Example: Disabling MAC Learning . . . . .	1508
Example: Disabling MAC Learning in a VLAN . . . . .	1508
Private VLAN Configuration Examples . . . . .	1510
Example: Configuring a Private VLAN on a Single Switch . . . . .	1510
Example: Configuring a Private VLAN Spanning Multiple Switches . . . . .	1515
Example: Configuring PVLANS with Secondary VLAN Trunk Ports and Promiscuous Access Ports . . . . .	1529
Q-in-Q Tunneling Configuration Example . . . . .	1541
Example: Setting Up Q-in-Q Tunneling . . . . .	1541
Configuration Tasks . . . . .	1544
Configuring the Interface Address . . . . .	1545
Configuring Interface IPv4 Addresses . . . . .	1546
Configuring Interface IPv6 Addresses . . . . .	1546
Configuring MAC Notification . . . . .	1547
Enabling MAC Notification . . . . .	1548
Disabling MAC Notification . . . . .	1548
Setting the MAC Notification Interval . . . . .	1548
Configuring MAC Table Aging . . . . .	1549
Configuring Reflective Relay . . . . .	1549
Configuring Static ARP Entries . . . . .	1550
Configuring Reflective Relay . . . . .	1550
Configuring Routed VLAN Interfaces . . . . .	1551
Configuring the Native VLAN Identifier . . . . .	1552
Configuring VLANs . . . . .	1553
Creating a Series of Tagged VLANs . . . . .	1555
Configuring STP . . . . .	1556
Unblocking an Interface That Receives BPDUs in Error . . . . .	1557
Configuring VLAN Spanning Tree Protocol . . . . .	1557
Disabling MAC Learning . . . . .	1558
Disabling MAC Learning in a VLAN . . . . .	1559
Creating a Private VLAN on a Single Switch . . . . .	1560
Creating a Private VLAN Spanning Multiple Switches . . . . .	1561
Configuring Q-in-Q Tunneling . . . . .	1562
Configuring Layer 2 Protocol Tunneling . . . . .	1563
Configuring the Forwarding Mode . . . . .	1565
Private VLAN Configuration Tasks . . . . .	1565
Creating a Private VLAN on a Single Switch . . . . .	1566
Creating a Private VLAN Spanning Multiple Switches . . . . .	1567
Configuring Q-in-Q Tunneling . . . . .	1568
Configuring Layer 2 Protocol Tunneling . . . . .	1569
Q-in-Q Tunneling Configuration Tasks . . . . .	1571
Configuring Q-in-Q Tunneling . . . . .	1571
Configuring Layer 2 Protocol Tunneling . . . . .	1572
Proxy ARP Configuration Task . . . . .	1574
Configuring Proxy ARP . . . . .	1574



Configuration Statements .....	1576
address .....	1577
alarm (STP) .....	1579
arp (Interfaces) .....	1580
block .....	1581
bpdu-block .....	1582
bpdu-block-on-edge .....	1583
bpdu-timeout-action .....	1584
bridge-priority .....	1585
broadcast .....	1586
ccc .....	1586
cost (STP) .....	1587
configuration-name (MSTP) .....	1588
connections (Circuits) .....	1589
cut-through .....	1590
description (VLAN) .....	1590
disable (STP) .....	1591
disable-timeout (BPDU) .....	1592
drop-threshold .....	1593
edge (STP) .....	1594
ethernet-switching-options .....	1595
eui-64 .....	1597
filter (VLANs) .....	1598
force-version .....	1598
forward-delay .....	1599
group-limit .....	1600
hello-time .....	1601
interface (BPDU) .....	1602
interface (Spanning Trees) .....	1603
interface (Storm Control) .....	1604
interface (STP) .....	1605
interface (VLANs) .....	1606
interfaces .....	1606
l3-interface (VLAN) .....	1607
mac-limit .....	1608
mac-notification .....	1609
mac-table-aging-time .....	1610
max-age .....	1611
max-hops .....	1612
members .....	1613
mode (STP) .....	1614
msti .....	1615
mstp .....	1616
native-vlan-id .....	1617
no-mac-learning (Global) .....	1618
no-mac-learning (Per VLAN) .....	1618
no-root-port .....	1619
notification-interval .....	1620
port-mode .....	1621



preferred	1622
primary (Address on Interface)	1623
priority (STP)	1624
protocols	1625
proxy-arp	1638
reflective-relay	1639
revision-level	1639
rstp	1640
storm-control	1641
stp	1642
traceoptions (Ethernet Switching Options)	1643
traceoptions (STP)	1646
unknown-unicast-forwarding	1649
vlan (Ethernet)	1650
vlan (STP)	1651
vlan (Unknown Unicast)	1652
vlan-id (VLANs)	1653
vlan-range	1653
vlangs	1654
vlan-tagging	1655
vstp	1656
Private VLAN Configuration Statements	1657
extend-secondary-vlan-id	1657
isolated	1657
isolation-vlan-id	1658
primary-vlan	1658
pvlan	1659
promiscuous	1659
pvlan-trunk	1660
vlangs	1661
Q-in-Q Tunneling Configuration Statements	1662
customer-vlangs	1662
dot1q-tunneling (Ethernet Switching)	1663
dot1q-tunneling (VLANs)	1664
ether-type	1665
layer2-protocol-tunneling	1666
mapping	1668
mapping-range	1669
no-local-switching	1669
shutdown-threshold	1670
vlan-id-start	1671
vlangs	1672
<b>Chapter 17 Administration</b>	<b>1675</b>
Routine Monitoring	1675
Verifying That MAC Notification Is Working Properly	1675
Verifying That a Series of Tagged VLANs Has Been Created	1675
Verifying That Q-in-Q Tunneling Is Working	1677
Verifying That a Private VLAN Is Working	1678



	Verifying That Proxy ARP Is Working Correctly . . . . .	1683
	Monitoring Commands . . . . .	1684
	clear ethernet-switching bpd-error . . . . .	1685
	clear ethernet-switching layer2-protocol-tunneling error . . . . .	1686
	clear ethernet-switching layer2-protocol-tunneling statistics . . . . .	1687
	clear ethernet-switching table . . . . .	1688
	clear spanning-tree statistics . . . . .	1690
	show ethernet-switching interfaces . . . . .	1691
	show ethernet-switching layer2-protocol-tunneling interface . . . . .	1695
	show ethernet-switching layer2-protocol-tunneling statistics . . . . .	1697
	show ethernet-switching layer2-protocol-tunneling vlan . . . . .	1700
	show ethernet-switching mac-learning-log . . . . .	1702
	show ethernet-switching mac-notification . . . . .	1704
	show ethernet-switching statistics aging . . . . .	1705
	show ethernet-switching statistics mac-learning . . . . .	1707
	show ethernet-switching table . . . . .	1711
	show interfaces xe . . . . .	1718
	show spanning-tree bridge . . . . .	1736
	show spanning-tree interface . . . . .	1741
	show spanning-tree mstp configuration . . . . .	1747
	show spanning-tree statistics . . . . .	1749
	show system statistics arp . . . . .	1751
	show vlans . . . . .	1752
<b>Chapter 18</b>	<b>Troubleshooting . . . . .</b>	<b>1761</b>
	Troubleshooting Procedures . . . . .	1761
	Troubleshooting Ethernet Switching . . . . .	1761
	Troubleshooting Layer 2 Protocol Tunneling . . . . .	1762
	Drop Threshold Statistics Might Be Incorrect . . . . .	1762
	Egress Filtering of L2PT Traffic Not Supported . . . . .	1762
	Troubleshooting Private VLANs . . . . .	1763
	Limitations of Private VLANs . . . . .	1763
	Forwarding with Private VLANs . . . . .	1763
	Egress Firewall Filters with Private VLANs . . . . .	1764
	Troubleshooting Q-in-Q and VLAN Translation Configuration . . . . .	1765
	Firewall Filter Match Condition Not Working with Q-in-Q Tunneling . . . . .	1765
	Egress Port Mirroring with VLAN Translation . . . . .	1765
<b>Part 7</b>	<b>High Availability</b>	
<b>Chapter 19</b>	<b>Overview . . . . .</b>	<b>1769</b>
	Software Features Overview . . . . .	1769
	Graceful Restart Concepts . . . . .	1769
	Understanding Nonstop Software Upgrade for QFabric Systems . . . . .	1770
	Understanding VRRP . . . . .	1774
	Overview of VRRP . . . . .	1774
	Sample VRRP Topology . . . . .	1775



<b>Chapter 20</b>	<b>Configuration</b>	<b>1777</b>
	Configuration Tasks for Graceful Restart	1777
	Configuring Graceful Restart for QFabric Systems	1777
	Enabling Graceful Restart	1778
	Configuring Graceful Restart Options for BGP	1778
	Configuring Graceful Restart Options for OSPF and OSPFv3	1779
	Tracking Graceful Restart Events	1780
	Configuring Routing Protocols Graceful Restart	1781
	Enabling Graceful Restart	1781
	Configuring Graceful Restart Options for BGP	1782
	Configuring Graceful Restart Options for ES-IS	1783
	Configuring Graceful Restart Options for IS-IS	1783
	Configuring Graceful Restart Options for OSPF and OSPFv3	1784
	Configuring Graceful Restart Options for RIP and RIPng	1785
	Configuring Graceful Restart Options for PIM Sparse Mode	1785
	Tracking Graceful Restart Events	1787
	Configuration Example for VRRP	1787
	Example: Configuring VRRP for Load Sharing	1787
	Configuration Tasks for VRRP	1792
	Configuring Basic VRRP Support	1792
	Configuring VRRP Authentication (IPv4 Only)	1793
	Configuring the Startup Period for VRRP Operations	1794
	Configuring the Advertisement Interval for the VRRP Master	1795
	Modifying the Advertisement Interval in Seconds	1795
	Modifying the Advertisement Interval in Milliseconds	1795
	Configuring VRRP Preemption and Hold Time	1796
	Configuring VRRP Preemption	1796
	Configuring the Preemption Hold Time	1796
	Overriding the Hold Time	1797
	Configuring a Route to Be Tracked	1797
	Configuring a Logical Interface to Be Tracked	1798
	Configuring a Backup to Accept Packets Destined for the Virtual IP Address	1799
	Configuring Passive ARP Learning for VRRP Backups	1800
	Configuring the Silent Period	1801
	Configuring Inheritance for a VRRP Group	1801
	Configuration Statements for Graceful Restart	1803
	disable	1803
	disable (BGP Graceful Restart)	1804
	graceful-restart (Enabling Globally)	1805
	graceful-restart (Protocols BGP)	1806
	graceful-restart (Protocols OSPF)	1808
	helper-disable (OSPF)	1810
	no-strict-lsa-checking	1811
	notify-duration	1812
	restart-duration	1813
	restart-time (BGP Graceful Restart)	1814
	stale-routes-time	1815



	Configuration Statements for VRRP .....	1816
	accept-data .....	1816
	advertise-interval .....	1817
	asymmetric-hold-time .....	1818
	authentication-key .....	1819
	authentication-type .....	1820
	bandwidth-threshold .....	1821
	failover-delay .....	1822
	fast-interval .....	1823
	hold-time (VRRP) .....	1824
	interface (VRRP Group) .....	1825
	preempt (VRRP) .....	1826
	priority (Protocols VRRP) .....	1827
	priority-cost (VRRP) .....	1828
	priority-hold-time .....	1829
	route (Interfaces) .....	1830
	startup-silent-period .....	1831
	traceoptions .....	1832
	track (VRRP) .....	1834
	virtual-address .....	1835
	vrrp-group .....	1836
<b>Chapter 21</b>	<b>Administration .....</b>	<b>1839</b>
	Operational Mode Commands for Graceful Restart .....	1839
	Verifying Graceful Restart Operation .....	1839
	Graceful Restart Operational Mode Commands .....	1839
	Verifying BGP Graceful Restart .....	1840
	Verifying IS-IS and OSPF Graceful Restart .....	1840
	Verifying CCC and TCC Graceful Restart .....	1841
	show bgp neighbor .....	1842
	show log .....	1856
	show (ospf   ospf3) overview .....	1859
	Operational Mode Commands for Nonstop Software Upgrade .....	1863
	Performing a Nonstop Software Upgrade on the QFabric System .....	1863
	Backing Up the Current Configuration Files .....	1864
	Downloading Software Files Using a Browser .....	1865
	Retrieving Software Files for Download .....	1866
	Performing a Nonstop Software Upgrade for Director Devices in a Director Group .....	1866
	Performing a Nonstop Software Upgrade for Interconnect Devices and Other Fabric-Related Components .....	1866
	(Optional) Creating Upgrade Groups for Node Groups .....	1867
	Performing a Nonstop Software Upgrade on a Node Group .....	1867
	Verifying Nonstop Software Upgrade for QFabric Systems .....	1868
	Verifying a Director Group Nonstop Software Upgrade .....	1868
	Verifying a Fabric Nonstop Software Upgrade .....	1881
	Verifying a Redundant Server Node Group Nonstop Software Upgrade .....	1882



	Verifying a Network Node Group Nonstop Software Upgrade . . . . .	1885
	request system software nonstop-upgrade . . . . .	1888
	show chassis nonstop-upgrade node-group . . . . .	1895
	Operational Mode Commands for VRRP . . . . .	1895
	show vrrp . . . . .	1896
<b>Chapter 22</b>	<b>Troubleshooting . . . . .</b>	<b>1907</b>
	Troubleshooting Procedures . . . . .	1907
	Troubleshooting VRRP . . . . .	1907
<b>Part 8</b>	<b>Interfaces</b>	
<b>Chapter 23</b>	<b>Overview . . . . .</b>	<b>1911</b>
	Interfaces Overview . . . . .	1911
	Interfaces Overview . . . . .	1911
	Network Interfaces . . . . .	1911
	Special Interfaces . . . . .	1912
	Understanding Aggregated Ethernet Interfaces and LACP . . . . .	1913
	Link Aggregation Group . . . . .	1913
	Link Aggregation Control Protocol (LACP) . . . . .	1914
	Understanding Interface Naming Conventions . . . . .	1915
	Physical Part of an Interface Name . . . . .	1915
	Logical Part of an Interface Name . . . . .	1927
	Wildcard Characters in Interface Names . . . . .	1928
	Understanding Interface Ranges on the QFX Series . . . . .	1928
	Understanding Layer 3 Logical Interfaces . . . . .	1930
	Understanding Management Interfaces . . . . .	1930
	Understanding Multichassis Link Aggregation . . . . .	1931
	Active-Active Mode . . . . .	1933
	ICCP and ICL-PL . . . . .	1933
	Failure Handling . . . . .	1933
	Multichassis Link Protection . . . . .	1934
	MC-LAG Packet Forwarding . . . . .	1934
	Layer 3 Routing . . . . .	1934
	Spanning Tree Protocol (STP) Guidelines . . . . .	1935
	MC-LAG Upgrade Guidelines . . . . .	1935
	Layer 2 Unicast Features Supported . . . . .	1936
	Layer 2 Multicast Features Supported . . . . .	1936
	IGMP Snooping on an Active-Active MC-LAG . . . . .	1936
	Layer 3 Unicast Features Supported . . . . .	1937
	VRRP Active-Standby Support . . . . .	1937
	Routed VLAN Interface (RVI) MAC Address Synchronization . . . . .	1938
	Address Resolution Protocol (ARP) . . . . .	1938
	DHCP Relay with Option 82 . . . . .	1938
	Private VLAN (PVLAN) . . . . .	1939
	Layer 3 Multicast . . . . .	1939
	Overview of Uplink Failure Detection . . . . .	1941
	Uplink Failure Detection Configuration . . . . .	1941
	Failure Detection Pair . . . . .	1942



<b>Chapter 24</b>	<b>Configuration</b>	<b>1945</b>
	Configuration Examples	1945
	Example: Configuring Interfaces for Uplink Failure Detection	1945
	Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch	1950
	Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch	1954
	Example: Configuring Multichassis Link Aggregation	1958
	Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP	1972
	Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast using MAC Address Synchronization	1995
	Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using Virtual Router Redundancy Protocol (VRRP)	2011
	Configuration Tasks	2028
	Configuring Gigabit and 10-Gigabit Ethernet Interfaces	2029
	Configuring Port Mode	2029
	Configuring the Link Settings for Gigabit Ethernet and 10-Gigabit Ethernet Interfaces	2029
	Configuring the IP Options	2030
	Configuring Aggregated Ethernet LACP	2030
	Configuring Ethernet Loopback Capability	2031
	Configuring Interfaces for Uplink Failure Detection	2032
	Configuring a Layer 3 Logical Interface	2033
	Configuring Link Aggregation	2033
	Creating an Aggregated Ethernet Interface	2034
	Configuring the VLAN Name and VLAN ID Number	2034
	Configuring Aggregated Ethernet LACP	2034
	Configuring Multichassis Link Aggregation	2036
	Configuring the QSFP+ Port Type on QFX3500 Standalone Switches	2039
	Configuring the Port Type on QFX3600 Standalone Switches	2041
	Configuration Statements	2043
	802.3ad	2043
	address	2044
	aggregated-devices	2046
	aggregated-ether-options	2047
	alarm (chassis)	2048
	authentication-key (ICCP)	2049
	backup-liveness-detection	2049
	backup-peer-ip	2050
	chassis	2051
	chassis (QFabric System)	2052
	chassis-id	2053
	container-devices	2054
	craft-lockout	2055
	description (Interfaces)	2056
	detection-time (Liveness Detection)	2057
	device-count	2057
	disk-failure-action	2058



ethernet	2058
ethernet (Alarm)	2059
ethernet-switching	2060
ether-options	2061
eui-64	2062
family	2063
fibre-channel (Alarm)	2065
flow-control	2066
force-up	2067
fpc	2068
fpc (Interconnect Device)	2069
gratuitous-arp-reply	2069
group	2070
hold-time (Physical Interface)	2071
iccp	2072
inet (interfaces)	2073
inet6 (interfaces)	2074
interconnect-device (Chassis)	2075
interface-range	2076
interface (Multichassis Protection)	2077
interfaces	2078
lACP (802.3ad)	2084
lACP (Aggregated Ethernet)	2085
link-to-disable	2085
link-to-monitor	2086
link-down	2087
link-mode	2088
link-speed	2089
liveness-detection	2090
local-ip-addr (ICCP)	2090
loopback (Aggregated Ethernet, Gigabit Ethernet, and 10-Gigabit Ethernet)	2091
management-ethernet (Alarm)	2091
mc-ae	2092
mc-ae-id	2093
member	2093
member-range	2094
minimum-interval (Liveness Detection)	2094
minimum-receive-interval (Liveness Detection)	2095
minimum-links	2095
mode (QFX Series)	2096
mtu	2097
multi-chassis	2098
multi-chassis-protection	2098
multiplier (Liveness Detection)	2099
no-adaptation (Liveness Detection)	2099
no-gratuitous-arp-request	2100
node-device (Chassis)	2101
node-group (Chassis)	2102



on-disk-failure	2103
peer (ICCP)	2104
peer (Multichassis)	2105
periodic	2105
pic	2106
port-mode	2107
reflective-relay	2108
routing-engine	2108
session-establishment-hold-time	2109
speed	2110
status-control	2110
targeted-broadcast	2111
threshold (Detection Time)	2111
traceoptions (Individual Interfaces)	2112
traceoptions (ICCP)	2113
transmit-interval (Liveness Detection)	2114
traps	2115
unit	2116
uplink-failure-detection	2117
version (Liveness Detection)	2117
vlan-id	2118
vlan-tagging	2118
xe (Port)	2119
xle (Port)	2120
<b>Chapter 25 Administration</b>	<b>2121</b>
Routine Monitoring	2121
Monitoring System Process Information	2121
Monitoring System Properties	2122
Monitoring Interface Status and Traffic	2123
Verifying That Layer 3 Logical Interfaces Are Working	2124
Verifying the Status of a LAG Interface	2124
Verifying That LACP Is Configured Correctly and Bundle Members Are	
Exchanging LACP Protocol Packets	2125
Verifying the LACP Setup	2125
Verifying That LACP Packets Are Being Exchanged	2126
Verifying That Uplink Failure Detection Is Working Correctly	2126
Monitoring Commands	2127
monitor interface	2128
show iccp	2137
show interfaces diagnostics optics	2139
show interfaces fabric	2146
show interfaces ge	2167
show interfaces mc-ae	2184
show interfaces statistics fabric	2186
show interfaces queue	2205
show interfaces queue fabric	2244
show interfaces xe	2266
show interfaces xle	2284



	show lacp interfaces . . . . .	2302
	show lacp statistics interfaces (View) . . . . .	2307
	show uplink-failure-detection . . . . .	2309
<b>Chapter 26</b>	<b>Troubleshooting . . . . .</b>	<b>2311</b>
	Troubleshooting Procedures . . . . .	2311
	Troubleshooting an Aggregated Ethernet Interface . . . . .	2311
	Troubleshooting Network Interfaces . . . . .	2311
	The interface on the port in which an SFP or SFP+ transceiver is installed in an SFP or SFP+ module is down . . . . .	2311
<b>Part 9</b>	<b>Routing Options</b>	
<b>Chapter 27</b>	<b>Overview . . . . .</b>	<b>2315</b>
	Routing Options Overview . . . . .	2315
	Overview of Routing Options . . . . .	2315
	Understanding Virtual Router Routing Instances . . . . .	2316
	Understanding Distributed Periodic Packet Management . . . . .	2316
<b>Chapter 28</b>	<b>Configuration . . . . .</b>	<b>2319</b>
	Configuration Tasks . . . . .	2319
	Configuring Static Routing . . . . .	2320
	Configuring Per-Packet Load Balancing . . . . .	2320
	Configuring Distributed Periodic Packet Management . . . . .	2322
	Disabling or Enabling Distributed Periodic Packet Management Globally . . . . .	2322
	Disabling or Enabling Distributed Periodic Packet Management for LACP Packets . . . . .	2322
	Configuring Virtual Router Routing Instances . . . . .	2323
	Configuration Examples . . . . .	2324
	Examples: Configuring Per-Packet Load Balancing . . . . .	2324
	Examples: Configuring BFD for Static Routes . . . . .	2325
	Understanding BFD for Static Routes . . . . .	2325
	Example: Configuring BFD for Static Routes . . . . .	2328
	Example: Enabling BFD on Qualified Next Hops in Static Routes . . . . .	2334
	Example: Configuring BFD Authentication for Static Routes . . . . .	2339
	Understanding BFD Authentication for Static Routes . . . . .	2339
	Example: Configuring BFD Authentication for Static Routes . . . . .	2341
	Configuration Statements . . . . .	2348
	active . . . . .	2349
	aggregate (Routing) . . . . .	2350
	as-path (Routing Options) . . . . .	2352
	autonomous-system . . . . .	2354
	backup-pe-group . . . . .	2356
	backups . . . . .	2357
	bandwidth (Multicast Flow Map) . . . . .	2358
	bfd-liveness-detection (Routing Options Static Route) . . . . .	2359
	bgp-orf-cisco-mode . . . . .	2363
	bmp . . . . .	2364
	brief . . . . .	2365



centralized	2366
community (Routing Options)	2367
confederation	2369
description (Routing Instances)	2370
discard	2371
export (Routing Options)	2372
export-rib	2373
fate-sharing	2374
flow	2375
flow-map	2376
forwarding-cache (Flow Maps)	2377
forwarding-cache (Multicast)	2378
forwarding-table	2379
generate	2380
import (Routing Options)	2381
import-policy	2382
import-rib	2383
indirect-next-hop	2384
install (Routing Options)	2385
instance-type	2386
interface (Multicast Static Routes)	2387
interface (Routing Instances)	2388
interface (Routing Options)	2389
interface-routes	2390
local-address (Routing Options)	2391
martians	2392
maximum-bandwidth (Routing Options)	2393
maximum-paths	2394
maximum-prefixes	2396
med-igp-update-interval	2397
metric (Aggregate, Generated, or Static Route)	2398
multicast (Routing Options)	2399
no-qos-adjust	2400
options (Routing Options)	2401
pim-to-igmp-proxy	2402
policy (Aggregate and Generated Routes)	2403
policy (Flow Maps)	2404
policy-options	2405
policy-statement	2406
ppm	2408
ppm (Ethernet Switching)	2409
preference (Routing Options)	2410
prefix	2411
protocols	2412
qualified-next-hop (Static Routes)	2414
readvertise	2416
redundant-sources	2417
resolution	2418
resolution-ribs	2419



	resolve . . . . .	2420
	retain . . . . .	2421
	reverse-oif-mapping . . . . .	2422
	rpf-check-policy (Routing Options RPF) . . . . .	2423
	rib (General) . . . . .	2424
	rib (Route Resolution) . . . . .	2426
	rib-group (Routing Options) . . . . .	2427
	rib-groups . . . . .	2428
	route-record . . . . .	2430
	router-id . . . . .	2431
	routing-instances . . . . .	2432
	routing-options . . . . .	2432
	scope . . . . .	2433
	scope-policy . . . . .	2434
	source-routing . . . . .	2435
	static (Routes) . . . . .	2436
	subscriber-leave-timer . . . . .	2438
	tag (Routing Options) . . . . .	2439
	threshold (Multicast Forwarding Cache) . . . . .	2440
	timeout (Flow Maps) . . . . .	2441
	timeout (Multicast) . . . . .	2442
	traceoptions (Routing Options) . . . . .	2443
	upstream-interface . . . . .	2446
<b>Chapter 29</b>	<b>Administration . . . . .</b>	<b>2447</b>
	Routine Monitoring . . . . .	2447
	Monitoring Routing Information . . . . .	2447
	Verifying That Virtual Router Routing Instances Are Working . . . . .	2448
	Operational Commands . . . . .	2449
	clear ipv6 neighbors . . . . .	2450
	show as-path . . . . .	2451
	show as-path domain . . . . .	2455
	show as-path summary . . . . .	2457
	show ipv6 neighbors . . . . .	2459
	show ipv6 router-advertisement . . . . .	2461
	show route . . . . .	2464
	show route active-path . . . . .	2470
	show route all . . . . .	2475
	show route aspath-regex . . . . .	2477
	show route best . . . . .	2479
	show route brief . . . . .	2482
	show route community . . . . .	2484
	show route community-name . . . . .	2486
	show route damping . . . . .	2488
	show route detail . . . . .	2494
	show route exact . . . . .	2509
	show route export . . . . .	2511
	show route extensive . . . . .	2513
	show route flow validation . . . . .	2528



	show route forwarding-table . . . . .	2530
	show route inactive-path . . . . .	2544
	show route inactive-prefix . . . . .	2548
	show route instance . . . . .	2550
	show route label . . . . .	2557
	show route label-switched-path . . . . .	2559
	show route martians . . . . .	2561
	show route next-hop . . . . .	2563
	show route no-community . . . . .	2569
	show route protocol . . . . .	2572
	show route range . . . . .	2584
	show route receive-protocol . . . . .	2589
	show route resolution . . . . .	2598
	show route snooping . . . . .	2601
	show route source-gateway . . . . .	2609
	show route summary . . . . .	2615
	show route table . . . . .	2619
	show route terse . . . . .	2630
<b>Chapter 30</b>	<b>Troubleshooting . . . . .</b>	<b>2633</b>
	Troubleshooting Procedures . . . . .	2633
	Troubleshooting Virtual Routing Instances . . . . .	2633
	Direct Routes Not Leaked Between Routing Instances . . . . .	2633
<b>Part 10</b>	<b>Border Gateway Protocol</b>	
<b>Chapter 31</b>	<b>Overview . . . . .</b>	<b>2637</b>
	BGP Overview . . . . .	2637
	Understanding BGP . . . . .	2638
	Autonomous Systems . . . . .	2638
	AS Paths and Attributes . . . . .	2638
	External and Internal BGP . . . . .	2639
	Multiple Instances of BGP . . . . .	2639
	BGP Routes Overview . . . . .	2640
	BGP Messages Overview . . . . .	2641
	Open Messages . . . . .	2641
	Update Messages . . . . .	2642
	Keepalive Messages . . . . .	2642
	Notification Messages . . . . .	2642



<b>Chapter 32</b>	<b>Configuration</b>	<b>2643</b>
	Basic BGP Configuration	2643
	Examples: Configuring External BGP Peering	2643
	Understanding External BGP Peering Sessions	2643
	Example: Configuring External BGP Point-to-Point Peer Sessions	2644
	Example: Configuring External BGP on Logical Systems with IPv6	
	Interfaces	2651
	Examples: Configuring Internal BGP Peering	2666
	Understanding Internal BGP Peering Sessions	2666
	Example: Configuring Internal BGP Peer Sessions	2667
	Example: Configuring Internal BGP Peering Sessions on Logical	
	Systems	2678
	BGP Path Attribute Configuration	2688
	Example: Configuring BGP Local Preference	2688
	Understanding the BGP Local Preference	2688
	Example: Configuring the Local Preference Value for BGP Routes	2689
	Examples: Configuring BGP MED	2702
	Understanding the MED Attribute	2702
	Example: Configuring the MED Attribute Directly	2704
	Example: Configuring the MED Using Route Filters	2717
	Example: Configuring the MED Using Communities	2730
	Example: Associating the MED Path Attribute with the IGP Metric and	
	Delaying MED Updates	2730
	Examples: Configuring BGP Local AS	2740
	Understanding the BGP Local AS Attribute	2740
	Example: Configuring a Local AS for EBGp Sessions	2745
	Example: Configuring a Private Local AS for EBGp Sessions	2755
	Example: Configuring the Accumulated IGP Attribute for BGP	2760
	Understanding the Accumulated IGP Attribute for BGP	2761
	Example: Configuring the Accumulated IGP Attribute for BGP	2761
	BGP Policy Configuration	2799
	Example: Configuring BGP Interactions with IGP	2799
	Understanding Routing Policies	2799
	Example: Injecting OSPF Routes into the BGP Routing Table	2800
	Example: Configuring BGP Route Advertisement	2803
	Understanding Route Advertisement	2803
	Example: Configuring BGP Prefix-Based Outbound Route Filtering	2807
	Example: Configuring EBGp Multihop	2811
	Understanding BGP Multihop	2811
	Example: Configuring EBGp Multihop Sessions	2811
	Example: Configuring BGP Route Preference (Administrative Distance)	2820
	Understanding Route Preference Values	2820
	Example: Configuring the Preference Value for BGP Routes	2821
	Example: Configuring BGP Path Selection	2826
	Understanding BGP Path Selection	2827
	Example: Ignoring the AS Path Attribute When Selecting the Best	
	Path	2830



Example: Removing Private AS Numbers . . . . .	2837
Understanding Private AS Number Removal from AS Paths . . . . .	2838
Example: Removing Private AS Numbers from AS Paths . . . . .	2839
BGP BFD Configuration . . . . .	2844
Example: Configuring BFD for BGP . . . . .	2844
Understanding BFD for BGP . . . . .	2844
Example: Configuring BFD on Internal BGP Peer Sessions . . . . .	2845
Example: Configuring BFD Authentication for BGP . . . . .	2853
Understanding BFD Authentication for BGP . . . . .	2853
Example: Configuring BFD Authentication for BGP . . . . .	2854
BGP Load Balancing Configuration . . . . .	2858
Examples: Configuring BGP Multipath . . . . .	2858
Understanding BGP Multipath . . . . .	2858
Example: Load Balancing BGP Traffic . . . . .	2858
Example: Configuring Single-Hop EBGP Peers to Accept Remote Next Hops . . . . .	2863
Example: Advertising Multiple BGP Paths to a Destination . . . . .	2874
Understanding the Advertisement of Multiple Paths to a Single Destination in BGP . . . . .	2874
Example: Advertising Multiple Paths in BGP . . . . .	2875
IBGP Scaling Configuration . . . . .	2900
Example: Configuring BGP Route Reflectors . . . . .	2900
Understanding BGP Route Reflectors . . . . .	2900
Example: Configuring a Route Reflector . . . . .	2902
Example: Configuring BGP Confederations . . . . .	2917
Understanding BGP Confederations . . . . .	2917
Example: Configuring BGP Confederations . . . . .	2918
BGP Security Configuration . . . . .	2924
Example: Configuring BGP Route Authentication . . . . .	2924
Understanding Route Authentication . . . . .	2924
Example: Configuring Route Authentication for BGP . . . . .	2926
Examples: Configuring TCP and BGP Security . . . . .	2931
Understanding Security Options for BGP with TCP . . . . .	2931
Example: Configuring a Filter to Block TCP Access to a Port Except from Specified BGP Peers . . . . .	2932
Example: Configuring a Filter to Limit TCP Access to a Port Based On a Prefix List . . . . .	2937
Example: Limiting TCP Segment Size for BGP . . . . .	2940
BGP Flap Configuration . . . . .	2945
Example: Preventing BGP Session Resets . . . . .	2945
Understanding BGP Session Resets . . . . .	2945
Example: Preventing BGP Session Flaps When VPN Families Are Configured . . . . .	2945
Examples: Configuring BGP Flap Damping . . . . .	2952
Understanding Damping Parameters . . . . .	2952
Example: Configuring Damping Parameters . . . . .	2953
Example: Configuring BGP Route Flap Damping Based on the MBGP MVPN Address Family . . . . .	2956



BGP Monitoring Configuration .....	2966
Example: Configuring BGP Trace Operations .....	2966
Understanding Trace Operations for BGP Protocol Traffic .....	2966
Example: Viewing BGP Trace Files on Logical Systems .....	2968
Configuration Statements .....	2973
accept-remote-nexthop .....	2973
advertise-external .....	2974
advertise-inactive .....	2975
advertise-peer-as .....	2976
algorithm (BGP BFD Authentication) .....	2977
apply-groups .....	2979
apply-groups-except .....	2979
authentication (BGP BFD Liveness Detection) .....	2980
authentication-algorithm .....	2982
authentication-key (Protocols BGP) .....	2983
authentication-key-chain (Protocols BGP) .....	2984
bfd-liveness-detection (Protocols BGP) .....	2985
bgp .....	2989
bgp-orf-cisco-mode .....	2990
cluster .....	2992
damping (Protocols BGP) .....	2994
description (Protocols BGP) .....	2996
detection-time (BFD for BGP) .....	2997
disable (Protocols BGP) .....	2998
disable (BGP Graceful Restart) .....	2999
export (Protocols BGP) .....	3000
family (Protocols BGP) .....	3001
graceful-restart (Protocols BGP) .....	3005
group (Protocols BGP) .....	3007
hold-down-interval (BGP BFD Liveness Detection) .....	3010
hold-time (Protocols BGP) .....	3012
import (Protocols BGP) .....	3014
include-mp-next-hop .....	3015
keep .....	3016
key-chain (BGP BFD Authentication) .....	3017
local-address (Protocols BGP) .....	3019
local-as .....	3021
local-preference .....	3024
log-updown (Protocols BGP) .....	3025
loops .....	3026
loose-check (BGP BFD Authentication) .....	3028
metric-out (Protocols BGP) .....	3030
minimum-interval (BGP BFD Liveness Detection) .....	3032
minimum-interval (BGP BFD Transmit Interval) .....	3033
minimum-receive-interval (BGP BFD Liveness Detection) .....	3035
mtu-discovery .....	3036
multihop .....	3038
multiplier (BGP BFD Liveness Detection) .....	3040
neighbor (Protocols BGP) .....	3041



	no-adaptation (BGP BFD Liveness Detection) . . . . .	3044
	no advertise-peer-as . . . . .	3045
	no-aggregator-id . . . . .	3046
	no-client-reflect . . . . .	3047
	out-delay . . . . .	3048
	outbound-route-filter . . . . .	3049
	passive (Protocols BGP) . . . . .	3050
	path-selection . . . . .	3051
	peer-as (Protocols BGP) . . . . .	3053
	preference (Protocols BGP) . . . . .	3055
	remove-private . . . . .	3056
	restart-time (BGP Graceful Restart) . . . . .	3058
	session-mode . . . . .	3059
	stale-routes-time . . . . .	3060
	tcp-mss (Protocols BGP) . . . . .	3061
	threshold (BGP BFD Detection Time) . . . . .	3062
	threshold (BGP BFD Transmit Interval) . . . . .	3064
	traceoptions (Protocols BGP) . . . . .	3065
	transmit-interval (BGP BFD Liveness Detection) . . . . .	3068
	version (BGP BFD Liveness Detection) . . . . .	3069
<b>Chapter 33</b>	<b>Administration . . . . .</b>	<b>3071</b>
	Routine Monitoring . . . . .	3071
	Monitoring BGP Routing Information . . . . .	3071
	Operational Commands . . . . .	3071
	clear bgp damping . . . . .	3072
	clear bgp neighbor . . . . .	3073
	clear bgp table . . . . .	3075
	show bgp group . . . . .	3077
	show bgp neighbor . . . . .	3084
	show bgp summary . . . . .	3098
	show policy damping . . . . .	3103
	show route damping . . . . .	3105
<b>Part 11</b>	<b>Intermediate System to Intermediate System</b>	
<b>Chapter 34</b>	<b>Overview . . . . .</b>	<b>3113</b>
	IS-IS Overview . . . . .	3113
	IS-IS Overview . . . . .	3113
	IS-IS Terminology . . . . .	3114
	ISO Network Addresses . . . . .	3114
	IS-IS Packets . . . . .	3116
	Persistent Route Reachability . . . . .	3117
	IS-IS Support for Multipoint Network Clouds . . . . .	3117
	Installing a Default Route to the Nearest Routing Device That Operates at Both IS-IS Levels . . . . .	3117
	Understanding BFD Authentication for IS-IS . . . . .	3118
	BFD Authentication Algorithms . . . . .	3118
	Security Authentication Keychains . . . . .	3119
	Strict Versus Loose Authentication . . . . .	3119



**Chapter 35**

Understanding Hitless Authentication Key Rollover for IS-IS . . . . .	3119
<b>Configuration . . . . .</b>	<b>3121</b>
Configuration Guidelines . . . . .	3121
Example: Configuring IS-IS . . . . .	3121
Configuration Examples . . . . .	3126
Example: Configuring Multi-Level IS-IS . . . . .	3127
Example: Configuring Hitless Authentication Key Rollover for IS-IS . . . . .	3135
Example: Redistributing OSPF Routes into IS-IS . . . . .	3139
Example: Configuring BFD for IS-IS . . . . .	3147
Example: Configuring BFD Authentication for IS-IS . . . . .	3153
Example: Configuring IS-IS Multicast Topology . . . . .	3156
IS-IS Multicast Topologies Overview . . . . .	3157
Example: Configuring IS-IS Multicast Topology . . . . .	3158
Example: Configuring IS-IS for CLNS . . . . .	3172
Understanding IS-IS for CLNS . . . . .	3172
Example: Configuring IS-IS for CLNS . . . . .	3172
Example: Configuring IS-IS Designated Routers . . . . .	3174
Understanding IS-IS Designated Routers . . . . .	3175
Example: Configuring Designated Router Election Priority for IS-IS . . . . .	3175
Example: Enabling Packet Checksums on IS-IS Interfaces . . . . .	3175
Configuration Tasks . . . . .	3178
Configuring IS-IS Authentication . . . . .	3178
Configuring Authentication Without Network-Wide Deployment . . . . .	3179
Configuration Statements . . . . .	3180
authentication-key (Protocols IS-IS) . . . . .	3180
authentication-key-chain (Protocols IS-IS) . . . . .	3181
authentication-type (Protocols IS-IS) . . . . .	3182
bfd-liveness-detection (Protocols IS-IS) . . . . .	3183
checksum (Protocols IS-IS) . . . . .	3185
csnp-interval . . . . .	3186
disable (Protocols IS-IS) . . . . .	3187
export (Protocols IS-IS) . . . . .	3188
external-preference (Protocols IS-IS) . . . . .	3189
family (Protocols IS-IS) . . . . .	3190
hello-authentication-key . . . . .	3191
hello-authentication-key-chain . . . . .	3192
hello-authentication-type . . . . .	3193
hello-interval (Protocols IS-IS) . . . . .	3194
hello-padding . . . . .	3195
hold-time (Protocols IS-IS) . . . . .	3197
ignore-attached-bit . . . . .	3198
interface (Protocols IS-IS) . . . . .	3199
ipv4-multicast . . . . .	3201
ipv4-multicast-metric . . . . .	3202
ipv6-multicast . . . . .	3202
ipv6-multicast-metric . . . . .	3203
ipv6-unicast . . . . .	3204
ipv6-unicast-metric . . . . .	3205



isis	3206
level (Global IS-IS)	3207
loose-authentication-check	3208
lsp-interval	3209
lsp-lifetime	3210
max-areas	3211
mesh-group (Protocols IS-IS)	3212
metric (Protocols IS-IS)	3213
no-adjacency-holddown	3214
no-authentication-check	3215
no-csnp-authentication	3215
no-hello-authentication	3216
no-ipv4-multicast	3216
no-ipv4-routing	3217
no-ipv6-multicast	3218
no-ipv6-routing	3219
no-ipv6-unicast	3220
no-psnp-authentication	3220
no-unicast-topology	3221
overload (Protocols IS-IS)	3222
passive (Protocols IS-IS)	3225
point-to-point	3226
preference (Protocols IS-IS)	3227
prefix-export-limit (Protocols IS-IS)	3228
priority (Protocols IS-IS)	3229
reference-bandwidth (Protocols IS-IS)	3230
rib-group (Protocols IS-IS)	3231
topologies (Protocols IS-IS)	3232
traceoptions (Protocols IS-IS)	3233
traffic-engineering (Protocols IS-IS)	3236
wide-metrics-only	3239
<b>Chapter 36 Administration</b>	<b>3241</b>
Operational Commands	3241
clear isis adjacency	3242
clear isis database	3244
clear isis overload	3246
clear isis statistics	3248
show isis adjacency	3250
show isis authentication	3254
show isis database	3256
show isis hostname	3263
show isis interface	3264
show isis overview	3269
show isis route	3272
show isis statistics	3276



**Part 12****Chapter 37****Open Shortest Path First****Overview ..... 3281**

## OSPF Overview ..... 3281

## OSPF Overview ..... 3282

## OSPF Default Route Preference Values ..... 3284

## OSPF Routing Algorithm ..... 3284

## OSPF Three-Way Handshake ..... 3285

## OSPF Version 3 ..... 3286

## OSPF Areas and Router Functionality Overview ..... 3287

## Areas ..... 3287

## Area Border Routers ..... 3287

## Backbone Areas ..... 3287

## AS Boundary Routers ..... 3288

## Backbone Router ..... 3288

## Internal Router ..... 3288

## Stub Areas ..... 3288

## Not-So-Stubby Areas ..... 3288

## Transit Areas ..... 3289

## Packets Overview ..... 3289

## OSPF Packet Header ..... 3289

## Hello Packets ..... 3290

## Database Description Packets ..... 3290

## Link-State Request Packets ..... 3290

## Link-State Update Packets ..... 3290

## Link-State Acknowledgment Packets ..... 3291

## Link-State Advertisement Packet Types ..... 3291

## OSPF External Metrics Overview ..... 3292

**Chapter 38****Configuration ..... 3293**

## Basic OSPF Area Configuration ..... 3293

## Examples: Configuring OSPF Designated Routers ..... 3293

## OSPF Designated Router Overview ..... 3293

## Example: Configuring an OSPF Router Identifier ..... 3294

## Example: Controlling OSPF Designated Router Election ..... 3296

## Examples: Configuring OSPF Areas ..... 3298

## Understanding OSPF Areas and Backbone Areas ..... 3298

## Example: Configuring a Single-Area OSPF Network ..... 3299

## Example: Configuring a Multiarea OSPF Network ..... 3301

## Advanced OSPF Area Configuration ..... 3304

## Examples: Configuring OSPF Stub and Not-So-Stubby Areas ..... 3305

## Understanding OSPF Stub Areas, Totally Stubby Areas, and

## Not-So-Stubby Areas ..... 3305

## Example: Configuring OSPF Stub and Totally Stubby Areas ..... 3306

## Example: Configuring OSPF Not-So-Stubby Areas ..... 3310

## Example: Configuring OSPF Multiarea Adjacency ..... 3315

## Multiarea Adjacency for OSPF ..... 3315

## Example: Configuring Multiarea Adjacency for OSPF ..... 3316



Example: Disabling OSPFv2 Compatibility with RFC 1583 . . . . .	3319
OSPFv2 Compatibility with RFC 1583 Overview . . . . .	3320
Example: Disabling OSPFv2 Compatibility with RFC 1583 . . . . .	3320
OSPF Interface Configuration . . . . .	3321
Examples: Configuring OSPF Interfaces . . . . .	3321
About OSPF Interfaces . . . . .	3322
Example: Configuring an Interface on a Broadcast or Point-to-Point Network . . . . .	3323
Example: Configuring an OSPFv2 Interface on a Nonbroadcast Multiaccess Network . . . . .	3325
Example: Configuring an OSPFv2 Interface on a Point-to-Multipoint Network . . . . .	3328
Example: Configuring OSPF Demand Circuits . . . . .	3330
Example: Configuring a Passive OSPF Interface . . . . .	3332
Example: Configuring OSPFv2 Peer interfaces . . . . .	3334
OSPF Route Control Configuration . . . . .	3336
Examples: Configuring OSPF Route Summarization . . . . .	3336
Understanding OSPF Route Summarization . . . . .	3336
Example: Summarizing Ranges of Routes in OSPF Link-State Advertisements . . . . .	3336
Example: Limiting the Number of Prefixes Exported to OSPF . . . . .	3342
Configuring OSPF Refresh and Flooding Reduction in Stable Topologies . . . . .	3344
Examples: Configuring OSPF Traffic Control . . . . .	3345
Understanding OSPF Traffic Control . . . . .	3345
Example: Controlling the Cost of Individual OSPF Network Segments . . . . .	3347
Example: Dynamically Adjusting OSPF Interface Metrics Based on Bandwidth . . . . .	3351
Example: Controlling OSPF Route Preferences . . . . .	3353
Example: Configuring OSPF Overload Mode . . . . .	3355
OSPF Overload Function Overview . . . . .	3355
Example: Configuring OSPF to Make Routing Devices Appear Overloaded . . . . .	3356
OSPF Fault Detection Configuration . . . . .	3359
Example: Configuring OSPF Timers . . . . .	3359
OSPF Timers Overview . . . . .	3359
Example: Configuring OSPF Timers . . . . .	3360
Example: Configuring BFD for OSPF . . . . .	3365
BFD for OSPF Overview . . . . .	3365
Example: Configuring BFD for OSPF . . . . .	3367
Example: Configuring BFD Authentication for OSPF . . . . .	3371
BFD Authentication for OSPF Overview . . . . .	3371
Configuring BFD Authentication for OSPF . . . . .	3373



OSPF Redundancy Features Configuration . . . . .	3376
Examples: Configuring Graceful Restart for OSPF . . . . .	3376
Graceful Restart for OSPF Overview . . . . .	3376
Example: Configuring Graceful Restart for OSPF . . . . .	3378
Example: Configuring the Helper Capability Mode for OSPFv2 Graceful Restart . . . . .	3382
Example: Configuring the Helper Capability Mode for OSPFv3 Graceful Restart . . . . .	3386
Example: Disabling Strict LSA Checking for OSPF Graceful Restart . . . . .	3389
OSPF Traffic Engineering Configuration . . . . .	3392
Examples: Configuring OSPF Traffic Engineering . . . . .	3392
OSPF Support for Traffic Engineering . . . . .	3392
Example: Enabling OSPF Traffic Engineering Support . . . . .	3394
Example: Configuring the Traffic Engineering Metric for a Specific OSPF Interface . . . . .	3398
Example: Configuring OSPF Passive Traffic Engineering Mode . . . . .	3400
OSPF Passive Traffic Engineering Mode . . . . .	3400
Example: Configuring OSPF Passive Traffic Engineering Mode . . . . .	3400
OSPF Database Protection Configuration . . . . .	3402
Example: Configuring OSPF Database Protection . . . . .	3403
OSPF Database Protection Overview . . . . .	3403
Configuring OSPF Database Protection . . . . .	3404
OSPF Policy Configuration . . . . .	3405
Examples: Configuring OSPF Routing Policy . . . . .	3405
Understanding OSPF Routing Policy . . . . .	3405
Example: Injecting OSPF Routes into the BGP Routing Table . . . . .	3407
Example: Redistributing Static Routes into OSPF . . . . .	3410
Example: Configuring an OSPF Import Policy . . . . .	3413
Example: Configuring a Route Filter Policy to Specify Priority for Prefixes Learned Through OSPF . . . . .	3417
Examples: Configuring Routing Policy for Network Summaries . . . . .	3421
Import and Export Policies for Network Summaries Overview . . . . .	3421
Example: Configuring an OSPF Export Policy for Network Summaries . . . . .	3421
Example: Configuring an OSPF Import Policy for Network Summaries . . . . .	3430
OSPF Monitoring Configuration . . . . .	3438
Example: Configuring OSPF Trace Options . . . . .	3438
Tracing OSPF Protocol Traffic . . . . .	3438
Example: Tracing OSPF Protocol Traffic . . . . .	3439
Configuration Statements . . . . .	3445
area . . . . .	3446
area-range . . . . .	3448
authentication (Protocols OSPF) . . . . .	3450
context-identifier (Protocols OSPF) . . . . .	3451
bfd-liveness-detection (Protocols OSPF) . . . . .	3452
database-protection . . . . .	3456
disable (OSPF) . . . . .	3458
export (Protocols OSPF) . . . . .	3460



	external-preference (Protocols OSPF) .....	3461
	graceful-restart (Protocols OSPF) .....	3462
	import (Protocols OSPF) .....	3464
	interface (Protocols OSPF) .....	3465
	no-nssa-abr .....	3467
	no-rfc-1583 .....	3468
	ospf .....	3469
	overload (Protocols OSPF) .....	3470
	preference (Protocols OSPF) .....	3471
	prefix-export-limit (Protocols OSPF) .....	3472
	reference-bandwidth (Protocols OSPF) .....	3473
	rib-group (Protocols OSPF) .....	3474
	topology (OSPF) .....	3475
	traceoptions (Protocols OSPF) .....	3476
	traffic-engineering (OSPF) .....	3479
<b>Chapter 39</b>	<b>Administration .....</b>	<b>3481</b>
	Routine Monitoring .....	3481
	Monitoring OSPF Routing Information .....	3481
	Operational Commands .....	3481
	clear (ospf   ospf3) database .....	3482
	clear (ospf   ospf3) database-protection .....	3485
	clear (ospf   ospf3) io-statistics .....	3486
	clear (ospf   ospf3) neighbor .....	3487
	clear (ospf   ospf3) statistics .....	3489
	clear (ospf   ospf3) overload .....	3491
	show (ospf   ospf3) backup coverage .....	3492
	show (ospf   ospf3) backup neighbor .....	3495
	show ospf context-identifier .....	3497
	show ospf database .....	3499
	show (ospf   ospf3) interface .....	3508
	show (ospf   ospf3) io-statistics .....	3514
	show (ospf   ospf3) log .....	3516
	show (ospf   ospf3) neighbor .....	3520
	show (ospf   ospf3) overview .....	3527
	show (ospf   ospf3) route .....	3532
	show (ospf   ospf3) statistics .....	3538
<b>Part 13</b>	<b>Routing Information Protocol</b>	
<b>Chapter 40</b>	<b>Overview .....</b>	<b>3545</b>
	RIP Overview .....	3545
	RIP Overview .....	3545
	Distance-Vector Routing Protocols .....	3545
	RIP Protocol Overview .....	3546
	RIP Packets .....	3547
	Maximizing Hop Count .....	3548
	Split Horizon and Poison Reverse Efficiency Techniques .....	3548
	Limitations of Unidirectional Connectivity .....	3549



<b>Chapter 41</b>	<b>Configuration</b>	<b>3551</b>
	RIP Configuration Tasks	3551
	Example: Configuring RIP	3551
	Understanding Basic RIP Routing	3551
	Example: Configuring a Basic RIP Network	3552
	Example: Configuring Authentication for RIP Routes	3558
	Understanding RIP Authentication	3558
	Example: Configuring Route Authentication for RIP	3558
	Enabling Authentication with Plain-Text Passwords (CLI Procedure)	3563
	Enabling Authentication with MD5 Authentication (CLI Procedure)	3563
	Example: Configuring BFD for RIP	3564
	Understanding BFD for RIP	3564
	Example: Configuring BFD for RIP	3565
	Example: Configuring BFD Authentication for RIP	3570
	Understanding BFD Authentication for RIP	3570
	Example: Configuring BFD Authentication for RIP	3572
	Example: Applying Policies to RIP Routes Imported from Neighbors	3578
	Understanding RIP Import Policy	3578
	Example: Applying Policies to RIP Routes Imported from Neighbors	3578
	Examples: Controlling Traffic with Metrics in a RIP Network	3584
	Understanding Traffic Control with Metrics in a RIP Network	3584
	Example: Controlling Traffic in a RIP Network with an Incoming Metric	3585
	Example: Controlling Traffic in a RIP Network with an Outgoing Metric	3586
	Example: Configuring the Metric Value Added to Imported RIP Routes	3588
	Example: Configuring the Sending and Receiving of RIPv1 and RIPv2 Packets	3592
	Understanding the Sending and Receiving of RIPv1 and RIPv2 Packets	3592
	Example: Configuring the Sending and Receiving of RIPv1 and RIPv2 Packets	3592
	Example: Redistributing Routes Among RIP Instances	3596
	Understanding Route Redistribution Among RIP instances	3596
	Example: Redistributing Routes Between Two RIP Instances	3597
	Example: Configuring RIP Timers	3601
	Understanding RIP Timers	3602
	Example: Configuring RIP Timers	3603
	Example: Tracing RIP Protocol Traffic	3608
	Understanding RIP Trace Operations	3608
	Example: Tracing RIP Protocol Traffic	3609
	RIP Configuration Statements	3614
	any-sender	3614
	authentication-key (Protocols RIP)	3615
	authentication-type (Protocols RIP)	3616
	bfd-liveness-detection (Protocols RIP)	3617
	check-zero	3620



	export (Protocols RIP) . . . . .	3621
	group (Protocols RIP) . . . . .	3622
	holddown (Protocols RIP) . . . . .	3624
	import (Protocols RIP) . . . . .	3625
	message-size . . . . .	3626
	metric-in (Protocols RIP) . . . . .	3627
	metric-out (Protocols RIP) . . . . .	3628
	neighbor (Protocols RIP) . . . . .	3629
	preference (Protocols RIP) . . . . .	3630
	receive (Protocols RIP) . . . . .	3631
	rib-group (Protocols RIP) . . . . .	3632
	rip . . . . .	3632
	route-timeout (Protocols RIP) . . . . .	3633
	send (Protocols RIP) . . . . .	3634
	traceoptions (Protocols RIP) . . . . .	3635
	update-interval (Protocols RIP) . . . . .	3638
<b>Chapter 42</b>	<b>Administration . . . . .</b>	<b>3639</b>
	Routine Monitoring . . . . .	3639
	Monitoring RIP Routing Information . . . . .	3639
	RIP Operational Commands . . . . .	3639
	clear rip general-statistics . . . . .	3640
	clear rip statistics . . . . .	3641
	show rip general-statistics . . . . .	3642
	show rip neighbor . . . . .	3644
	show rip statistics . . . . .	3646
<b>Part 14</b>	<b>Multicast</b>	
<b>Chapter 43</b>	<b>Overview . . . . .</b>	<b>3651</b>
	Introduction to PIM Basics . . . . .	3651
	PIM Overview . . . . .	3651
	Basic PIM Network Components . . . . .	3653
	PIM on Aggregated Interfaces . . . . .	3654
	Introduction to PIM Sparse Mode . . . . .	3654
	Understanding PIM Sparse Mode . . . . .	3655
	Rendezvous Point . . . . .	3656
	RP Mapping Options . . . . .	3657
	Designated Router . . . . .	3657
	Introduction to Static RP . . . . .	3658
	Understanding Static RP . . . . .	3658
	Introduction to Anycast RP . . . . .	3658
	Understanding RP Mapping with Anycast RP . . . . .	3659
	Introduction to PIM Bootstrap Router . . . . .	3659
	Understanding the PIM Bootstrap Router . . . . .	3659
	Introduction to PIM Filtering . . . . .	3660
	Understanding Multicast Message Filters . . . . .	3660
	Filtering MAC Addresses . . . . .	3661
	Filtering RP and DR Register Messages . . . . .	3661



Introduction to PIM RPT and SPT Cutover . . . . .	3662
Understanding Multicast Rendezvous Points, Shared Trees, and Rendezvous-Point Trees . . . . .	3662
Building an RPT Between the RP and Receivers . . . . .	3663
PIM Sparse Mode Source Registration . . . . .	3664
Multicast Shortest-Path Tree . . . . .	3667
SPT Cutover . . . . .	3668
SPT Cutover Control . . . . .	3671
Introduction to IGMP . . . . .	3671
Understanding Group Membership Protocols . . . . .	3671
Understanding IGMP . . . . .	3672
Introduction to IGMP Snooping . . . . .	3674
IGMP Snooping Overview . . . . .	3674
How IGMP Snooping Works . . . . .	3674
How IGMP Snooping Works with Routed VLAN Interfaces . . . . .	3675
How Hosts Join and Leave Multicast Groups . . . . .	3675
IGMP Snooping Support for IGMPv3 . . . . .	3675
IGMP Snooping and Forwarding Interfaces . . . . .	3676
General Forwarding Rules . . . . .	3676
Using a Switch as an IGMP Querier . . . . .	3677
Introduction to MSDP . . . . .	3678
Understanding MSDP . . . . .	3678
Filtering MSDP SA Messages . . . . .	3679
Introduction to Source-Specific Multicast . . . . .	3679
Source-Specific Multicast Groups Overview . . . . .	3680
Understanding PIM Source-Specific Mode . . . . .	3680
PIM SSM . . . . .	3682
Introduction to Multicast VLAN Registration . . . . .	3683
Understanding Multicast VLAN Registration . . . . .	3683
How MVR Works . . . . .	3684
<b>Chapter 44 Configuration . . . . .</b>	<b>3687</b>
PIM Basics . . . . .	3687
Changing the PIM Version . . . . .	3687
Modifying the PIM Hello Interval . . . . .	3688
Preserving Multicast Performance by Disabling Response to the ping Utility . . . . .	3689
Configuring PIM Trace Options . . . . .	3690
Disabling PIM . . . . .	3692
Disabling the PIM Protocol . . . . .	3692
Disabling PIM On an Interface . . . . .	3693
Disabling PIM for a Family . . . . .	3693
Disabling PIM for a Rendezvous Point . . . . .	3694
PIM Designated Router . . . . .	3694
Configuring Interface Priority for PIM Designated Router Selection . . . . .	3694
Configuring PIM Designated Router Election on Point-to-Point Links . . . . .	3695
PIM Sparse Mode . . . . .	3696
Enabling PIM Sparse Mode . . . . .	3696
Configuring PIM Join Load Balancing . . . . .	3697



Modifying the Join State Timeout . . . . .	3700
Example: Enabling Join Suppression . . . . .	3701
Static RP . . . . .	3705
Configuring Local PIM RPs . . . . .	3705
Configuring the Static PIM RP Address on the Non-RP Routing Device . . . . .	3707
Anycast RP . . . . .	3708
Example: Configuring PIM Anycast With or Without MSDP . . . . .	3708
Configuring a PIM Anycast RP Router with MSDP . . . . .	3712
Configuring a PIM Anycast RP Router Using Only PIM . . . . .	3713
Configuring All PIM Anycast Non-RP Routers . . . . .	3714
Example: Configuring Multiple RPs in a Domain with Anycast RP . . . . .	3714
PIM Bootstrap Router . . . . .	3717
Configuring PIM Bootstrap Properties for IPv4 or IPv6 . . . . .	3717
Example: Rejecting PIM Bootstrap Messages at the Boundary of a PIM Domain . . . . .	3718
Example: Configuring PIM BSR Filters . . . . .	3719
PIM Filtering . . . . .	3719
Configuring Interface-Level PIM Neighbor Policies . . . . .	3720
Filtering Outgoing PIM Join Messages . . . . .	3721
Filtering Incoming PIM Join Messages . . . . .	3722
Configuring Register Message Filters on a PIM RP and DR . . . . .	3723
PIM RPT and SPT Cutover . . . . .	3725
Example: Configuring the PIM Assert Timeout . . . . .	3725
Example: Configuring the PIM SPT Threshold Policy . . . . .	3728
PIM and the BFD Protocol . . . . .	3731
Configuring BFD for PIM . . . . .	3731
Configuring BFD Authentication for PIM . . . . .	3733
Configuring BFD Authentication Parameters . . . . .	3733
Viewing Authentication Information for BFD Sessions . . . . .	3734
IGMP . . . . .	3736
Configuring IGMP . . . . .	3736
Enabling IGMP . . . . .	3738
Changing the IGMP Version . . . . .	3739
Modifying the IGMP Host-Query Message Interval . . . . .	3739
Modifying the IGMP Last-Member Query Interval . . . . .	3740
Specifying Immediate-Leave Host Removal for IGMP . . . . .	3741
Filtering Unwanted IGMP Reports at the IGMP Interface Level . . . . .	3742
Accepting IGMP Messages from Remote Subnetworks . . . . .	3743
Modifying the IGMP Query Response Interval . . . . .	3744
Modifying the IGMP Robustness Variable . . . . .	3745
Limiting the Maximum IGMP Message Rate . . . . .	3746
Enabling IGMP Static Group Membership . . . . .	3746
Recording IGMP Join and Leave Events . . . . .	3753
Limiting the Number of IGMP Multicast Group Joins on Logical Interfaces . . . . .	3754
Tracing IGMP Protocol Traffic . . . . .	3755
Disabling IGMP . . . . .	3757



IGMP Snooping .....	3757
Configuring IGMP Snooping .....	3758
Changing the IGMP Snooping Group Timeout Value .....	3759
Example: Configuring IGMP Snooping .....	3759
Configuring Multicast VLAN Registration (CLI Procedure) .....	3762
Example: Configuring Multicast VLAN Registration .....	3763
MSDP .....	3768
Configuring MSDP .....	3768
Tracing MSDP Protocol Traffic .....	3769
Configuring the Interface to Accept Traffic from a Remote Source .....	3771
Example: Configuring MSDP .....	3772
Example: Configuring MSDP with Active Source Limits and Mesh Groups ..	3773
Example: Configuring PIM Anycast With or Without MSDP .....	3779
Configuring a PIM Anycast RP Router with MSDP .....	3782
Source-Specific Multicast .....	3783
Example: Configuring PIM SSM on a Network .....	3783
Example: Configuring an SSM-Only Domain .....	3785
Example: Configuring SSM Mapping .....	3785
Example: Configuring Source-Specific Multicast Groups with Any-Source Override .....	3788
Example: Configuring SSM Maps for Different Groups to Different Sources .....	3791
Multiple SSM Maps and Groups for Interfaces .....	3791
Example: Configuring Multiple SSM Maps Per Interface .....	3792
PIM Configuration Statements .....	3795
address (Anycast RPs) .....	3795
address (Local RPs) .....	3796
address (Static RPs) .....	3797
algorithm .....	3798
anycast-pim .....	3799
assert-timeout .....	3800
authentication (Protocols PIM) .....	3801
bfd-liveness-detection (Protocols PIM) .....	3802
bootstrap .....	3803
bootstrap-export .....	3804
bootstrap-import .....	3805
bootstrap-priority .....	3806
detection-time (BFD for PIM) .....	3807
disable (PIM) .....	3808
dr-election-on-p2p .....	3809
dr-register-policy .....	3809
embedded-rp .....	3810
export (Protocols PIM Bootstrap) .....	3811
export (Protocols PIM) .....	3811
family (Bootstrap) .....	3812
family (Protocols PIM) .....	3813
family (Local RP) .....	3814
group (RPF Selection) .....	3815
group-ranges .....	3816



hello-interval (Protocols PIM) . . . . .	3817
hold-time (Protocols PIM) . . . . .	3818
import (Protocols PIM Bootstrap) . . . . .	3819
import (Protocols PIM) . . . . .	3820
infinity . . . . .	3821
interface . . . . .	3822
join-load-balance . . . . .	3823
join-prune-timeout . . . . .	3824
key-chain (Protocols PIM) . . . . .	3825
local . . . . .	3826
local-address (Protocols PIM) . . . . .	3827
loose-check . . . . .	3828
maximum-rps . . . . .	3829
minimum-interval (PIM BFD Liveness Detection) . . . . .	3830
minimum-interval (PIM BFD Transmit Interval) . . . . .	3831
minimum-receive-interval . . . . .	3832
mode (Protocols PIM) . . . . .	3833
multiplier . . . . .	3833
neighbor-policy . . . . .	3834
next-hop (PIM RPF Selection) . . . . .	3834
no-adaptation (PIM BFD Liveness Detection) . . . . .	3835
override-interval . . . . .	3836
pim . . . . .	3837
prefix-list (PIM RPF Selection) . . . . .	3840
priority (Bootstrap) . . . . .	3841
priority (PIM Interfaces) . . . . .	3842
priority (PIM RPs) . . . . .	3843
propagation-delay . . . . .	3844
reset-tracking-bit . . . . .	3845
rib-group (Protocols PIM) . . . . .	3846
rp . . . . .	3847
rp-register-policy . . . . .	3849
rp-set . . . . .	3850
rpf-selection . . . . .	3851
source (PIM RPF Selection) . . . . .	3852
spt-threshold . . . . .	3853
static (Protocols PIM) . . . . .	3854
threshold (PIM BFD Detection Time) . . . . .	3855
threshold (PIM BFD Transmit Interval) . . . . .	3856
transmit-interval (PIM BFD Liveness Detection) . . . . .	3857
traceoptions (Protocols PIM) . . . . .	3858
version (BFD) . . . . .	3861
version (PIM) . . . . .	3862
wildcard-source (PIM RPF Selection) . . . . .	3863
IGMP Configuration Statements . . . . .	3863
accounting (Protocols IGMP) . . . . .	3863
accounting (Protocols IGMP Interface) . . . . .	3864
asm-override-ssm . . . . .	3864
disable (Protocols IGMP) . . . . .	3865



exclude (Protocols IGMP) .....	3865
group (Protocols IGMP) .....	3866
group-count (Protocols IGMP) .....	3867
group-increment (Protocols IGMP) .....	3867
group-limit .....	3868
group-policy (Protocols IGMP) .....	3869
igmp .....	3870
immediate-leave (Protocols IGMP) .....	3872
interface (Protocols IGMP) .....	3873
maximum-transmit-rate (Protocols IGMP) .....	3874
oif-map .....	3874
passive (IGMP) .....	3875
promiscuous-mode (Protocols IGMP) .....	3876
query-interval (Protocols IGMP) .....	3876
query-last-member-interval (Protocols IGMP) .....	3877
query-response-interval (Protocols IGMP) .....	3878
robust-count (Protocols IGMP) .....	3879
source (Protocols IGMP) .....	3880
source-count (Protocols IGMP) .....	3881
source-increment (Protocols IGMP) .....	3881
static (Protocols IGMP) .....	3882
traceoptions (Protocols IGMP) .....	3883
version (Protocols IGMP) .....	3885
IGMP Snooping Configuration Statements .....	3886
data-forwarding .....	3886
disable (IGMP Snooping) .....	3887
disable interface (IGMP Snooping) .....	3887
group (IGMP Snooping) .....	3888
groups (Multicast VLAN Registration) .....	3888
igmp-querier .....	3889
igmp-snooping .....	3890
install (Multicast VLAN Registration) .....	3891
interface (IGMP Snooping) .....	3891
multicast-router-interface (IGMP Snooping) .....	3892
proxy (Multicast VLAN Registration) .....	3892
receiver .....	3893
robust-count (IGMP Snooping) .....	3893
source (Multicast VLAN Registration) .....	3894
source-address (IGMP Querier) .....	3894
source-vlans .....	3895
static (IGMP Snooping) .....	3895
traceoptions (IGMP Snooping) .....	3896
vlan (IGMP Snooping) .....	3898
version (IGMP Snooping) .....	3899
MSDP Configuration Statements .....	3900
active-source-limit .....	3900
authentication-key .....	3901
data-encapsulation .....	3902
default-peer .....	3903



	disable (Protocols MSDP) .....	3904
	export (Protocols MSDP) .....	3905
	group .....	3906
	import (Protocols MSDP) .....	3907
	local-address .....	3908
	maximum .....	3909
	mode (Protocols MSDP) .....	3910
	msdp .....	3911
	peer (Protocols MSDP) .....	3913
	rib-group (Protocols MSDP) .....	3914
	source .....	3915
	threshold .....	3916
	traceoptions (Protocols MSDP) .....	3917
	Source-Specific Multicast Configuration Statements .....	3920
	asm-override-ssm .....	3920
	policy (SSM Maps) .....	3921
	ssm-groups .....	3922
	ssm-map (Protocols IGMP) .....	3923
	ssm-map (Routing Options Multicast) .....	3923
	ssm-map-policy (IGMP) .....	3924
<b>Chapter 45</b>	<b>Administration .....</b>	<b>3925</b>
	Routine Monitoring .....	3925
	Monitoring IGMP Snooping .....	3925
	Verifying the IGMP Snooping Group Timeout Value .....	3926
	Monitoring Commands for Multicast Protocols .....	3926
	clear igmp membership .....	3927
	clear igmp-snooping membership .....	3930
	clear igmp statistics .....	3931
	clear igmp-snooping statistics .....	3933
	clear msdp cache .....	3934
	clear msdp statistics .....	3935
	clear multicast bandwidth-admission .....	3936
	clear multicast scope .....	3938
	clear multicast sessions .....	3939
	clear multicast statistics .....	3940
	clear pim join .....	3941
	clear pim register .....	3942
	clear pim statistics .....	3944
	mtrace .....	3947
	mtrace from-source .....	3950
	mtrace monitor .....	3953
	mtrace to-gateway .....	3955
	show configuration protocols igmp .....	3958
	show igmp group .....	3960
	show igmp interface .....	3964
	show igmp statistics .....	3968
	show igmp-snooping membership .....	3971
	show igmp-snooping route .....	3974



show igmp-snooping statistics . . . . .	3976
show igmp-snooping vlans . . . . .	3978
show msdp . . . . .	3980
show msdp source . . . . .	3982
show msdp source-active . . . . .	3984
show msdp statistics . . . . .	3987
show multicast flow-map . . . . .	3991
show multicast interface . . . . .	3993
show multicast mrrinfo . . . . .	3995
show multicast next-hops . . . . .	3997
show multicast pim-to-igmp-proxy . . . . .	4000
show multicast pim-to-mld-proxy . . . . .	4002
show multicast route . . . . .	4004
show multicast rpf . . . . .	4010
show multicast scope . . . . .	4014
show multicast sessions . . . . .	4016
show multicast usage . . . . .	4019
show pim bootstrap . . . . .	4022
show pim interfaces . . . . .	4024
show pim join . . . . .	4027
show pim neighbors . . . . .	4036
show pim rps . . . . .	4041
show pim source . . . . .	4048
show pim statistics . . . . .	4050
show system statistics igmp . . . . .	4063
test msdp . . . . .	4067

## Part 15

### Chapter 46

## Security

<b>Overview . . . . .</b>	<b>4071</b>
Firewall Filters . . . . .	4071
Overview of Firewall Filters . . . . .	4071
Firewall Filter Types . . . . .	4072
Firewall Filter Components . . . . .	4072
Firewall Filter Processing . . . . .	4073
Understanding Filter-Based Forwarding . . . . .	4073
Understanding How Firewall Filters Are Evaluated . . . . .	4074
Understanding How Firewall Filters Control Packet Flows . . . . .	4076
Understanding Firewall Filter Match Conditions . . . . .	4077
Filter Match Conditions . . . . .	4077
Numeric Filter Match Conditions . . . . .	4077
Interface Filter Match Conditions . . . . .	4078
IP Address Filter Match Conditions . . . . .	4078
MAC Address Filter Match Conditions . . . . .	4079
Bit-Field Filter Match Conditions . . . . .	4079
Firewall Filter Match Conditions and Actions . . . . .	4080
Understanding How a Firewall Filter Tests a Protocol . . . . .	4090



Understanding Firewall Filter Planning . . . . .	4091
Planning the Number of Firewall Filters to Create . . . . .	4092
Understanding How Many Firewall Filters Are Supported . . . . .	4092
Egress Filters . . . . .	4094
Avoid Configuring too Many Filters . . . . .	4094
Understanding Firewall Filter Processing Points for Bridged and Routed Packets . . . . .	4094
Applying Firewall Filters to Interfaces . . . . .	4095
Policers . . . . .	4096
Overview of Policers . . . . .	4096
Policer Overview . . . . .	4096
Policer Types . . . . .	4097
Policer Actions . . . . .	4098
Policer Colors . . . . .	4098
Suggested Naming Convention for Policers . . . . .	4099
Policer Counters . . . . .	4099
Policer Algorithms . . . . .	4099
How Many Policers are Supported? . . . . .	4100
Understanding Policers with Link Aggregation Groups . . . . .	4100
Understanding Color-Blind Mode for Single-Rate Tricolor Marking . . . . .	4100
Understanding Color-Aware Mode for Single-Rate Tricolor Marking . . . . .	4101
Summary of PLP Changes . . . . .	4101
Understanding Color-Blind Mode for Two-Rate Tricolor Marking . . . . .	4103
Understanding Color-Aware Mode for Two-Rate Tricolor Marking . . . . .	4103
Summary of PLP Changes . . . . .	4103
Effect on Green Packets (Low PLP) . . . . .	4104
Effect on Yellow Packets (Medium PLP) . . . . .	4104
Effect on Red Packets (High PLP) . . . . .	4105
Port Security . . . . .	4105
Overview of Access Port Protection . . . . .	4105
Mitigation of Ethernet Switching Table Overflow Attacks . . . . .	4105
Mitigation of Rogue DHCP Server Attacks . . . . .	4106
Protection Against ARP Spoofing Attacks . . . . .	4106
Protection Against DHCP Snooping Database Alteration Attacks . . . . .	4107
Protection Against DHCP Starvation Attacks . . . . .	4107
Port Security Overview . . . . .	4108
Understanding DHCP Snooping for Port Security . . . . .	4110
DHCP Snooping Basics . . . . .	4110
DHCP Snooping Process . . . . .	4111
DHCP Server Access . . . . .	4112
DHCP Snooping Table . . . . .	4115
Static IP Address Additions to the DHCP Snooping Database . . . . .	4115
Snooping DHCP Packets That Have Invalid IP Addresses . . . . .	4115
Prioritizing Snooped Packets . . . . .	4116
Understanding DAI for Port Security . . . . .	4117
Address Resolution Protocol . . . . .	4117
ARP Spoofing . . . . .	4117
Dynamic ARP Inspection (DAI) . . . . .	4118
Prioritizing Inspected Packets . . . . .	4118



	Understanding MAC Limiting and MAC Move Limiting for Port Security . . .	4119
	MAC Limiting . . . . .	4119
	MAC Move Limiting . . . . .	4120
	Actions for MAC Limiting . . . . .	4120
	MAC Addresses That Exceed the MAC Limit or MAC Move Limit . . . .	4120
	Understanding Trusted and Untrusted Ports . . . . .	4121
	Understanding Trusted DHCP Servers for Port Security . . . . .	4121
	Understanding DHCP Option 82 for Port Security . . . . .	4122
	DHCP Option 82 Processing . . . . .	4122
	Suboption Components of Option 82 . . . . .	4123
	Configurations That Support Option 82 . . . . .	4123
	Understanding Static ARP Entries . . . . .	4124
	Device Security . . . . .	4125
	Understanding Storm Control . . . . .	4125
	Understanding Unknown Unicast Forwarding . . . . .	4126
<b>Chapter 47</b>	<b>Configuration . . . . .</b>	<b>4127</b>
	Firewall and Policer Configuration Examples . . . . .	4127
	Example: Using Filter-Based Forwarding to Route Application Traffic to a Security Device . . . . .	4127
	Example: Using Two-Color Policers and Prefix Lists . . . . .	4131
	Example: Using Policers to Manage Oversubscription . . . . .	4134
	Port Security Configuration Examples . . . . .	4136
	Example: Configuring Basic Port Security Features . . . . .	4136
	Example: Configuring Storm Control . . . . .	4143
	Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks . . . . .	4145
	Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks . . . . .	4148
	Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks . . . . .	4152
	Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch . . . . .	4155
	Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks . . . . .	4162
	Example: Configuring Allowed MAC Addresses to Protect the Switch from DHCP Snooping Database Alteration Attacks . . . . .	4167
	Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server . . . . .	4170
	Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server . . . . .	4174
	Firewall and Policer Configuration Tasks . . . . .	4176
	Configuring Firewall Filters . . . . .	4177
	Configuring a Firewall Filter . . . . .	4177
	Applying a Firewall Filter to a Port . . . . .	4179
	Applying a Firewall Filter to a VLAN . . . . .	4179



Applying a Firewall Filter to a Layer 3 (Routed) Interface . . . . .	4179
Applying Firewall Filters to Interfaces . . . . .	4180
Assigning Forwarding Classes and Loss Priority . . . . .	4181
Configuring Color-Blind Egress Policers for Medium-Low PLP . . . . .	4182
Configuring Two-Color and Three-Color Policers to Control Traffic	
Rates . . . . .	4183
Configuring Two-Color Policers . . . . .	4183
Configuring Three-Color Policers . . . . .	4184
Specifying Policers in a Firewall Filter Configuration . . . . .	4184
Applying a Firewall Filter That Includes a Policers . . . . .	4185
Port Security Configuration Tasks . . . . .	4185
Configuring Port Security (CLI Procedure) . . . . .	4186
Enabling DHCP Snooping . . . . .	4187
Enabling Dynamic ARP Inspection (DAI) . . . . .	4187
Limiting Dynamic MAC Addresses on an Interface . . . . .	4187
Enabling Persistent MAC Learning on an Interface . . . . .	4187
Limiting MAC Address Movement . . . . .	4188
Configuring Trusted DHCP Servers on an Interface . . . . .	4188
Configuring MAC Limiting . . . . .	4188
Configuring MAC Move Limiting (CLI Procedure) . . . . .	4190
Configuring Autorecovery for MAC Limited or Storm Control Interfaces (CLI	
Procedure) . . . . .	4192
Configuring the none Action to Override a MAC Limit Applied to All Interfaces	
(CLI Procedure) . . . . .	4192
Configuring Static ARP Entries . . . . .	4193
Configuring Static IP Addresses for DHCP Bindings on Access Ports (CLI	
Procedure) . . . . .	4193
Configuring Unknown Unicast Forwarding . . . . .	4194
Enabling DHCP Snooping (CLI Procedure) . . . . .	4194
Enabling DHCP Snooping . . . . .	4196
Applying CoS Forwarding Classes to Prioritize Snooped Packets . . . . .	4196
Enabling Dynamic ARP Inspection (CLI Procedure) . . . . .	4197
Enabling DAI . . . . .	4198
Applying CoS Forwarding Classes to Prioritize Inspected Packets . . . . .	4198
Enabling a Trusted DHCP Server (CLI Procedure) . . . . .	4199
Enabling a Trusted Port for DHCP . . . . .	4200
Setting Up DHCP Option 82 on the Switch with No Relay Agent Between	
Clients and DHCP Server (CLI Procedure) . . . . .	4201
Setting Up DHCP Option 82 with the Switch as a Relay Agent Between	
Clients and DHCP Server (CLI Procedure) . . . . .	4204
Configuration Statements for Firewall Filters . . . . .	4207
family . . . . .	4207
filter . . . . .	4208
filter (Layer 2 and Layer 3 Interfaces) . . . . .	4209
filter (VLANs) . . . . .	4210
firewall . . . . .	4211
from . . . . .	4212
interface-specific . . . . .	4213
term . . . . .	4213



then (Filters) .....	4214
Configuration Statements for Policers .....	4214
action .....	4214
bandwidth-limit .....	4215
burst-size-limit .....	4215
color-aware .....	4216
color-blind .....	4217
committed-burst-size .....	4218
committed-information-rate .....	4219
excess-burst-size .....	4220
filter-specific .....	4221
firewall .....	4222
if-exceeding .....	4223
loss-priority high then discard (Three-Color Policer) .....	4224
peak-burst-size .....	4225
peak-information-rate .....	4226
policer .....	4227
single-rate .....	4228
then (Policers) .....	4229
three-color-policer .....	4230
two-rate .....	4231
Configuration Statements for Port Security .....	4232
allowed-mac .....	4232
arp-inspection .....	4233
circuit-id .....	4234
dhcp-trusted .....	4235
dhcp-option82 .....	4236
dhcp-snooping-file .....	4237
dhcp-trusted .....	4237
disable-timeout (Port Error Disable) .....	4238
ethernet-switching-options .....	4239
examine-dhcp .....	4241
examine-fip .....	4242
fc-map .....	4243
fcoe-trusted .....	4244
forwarding-class (for DHCP Snooping or DAI Packets) .....	4245
interface (Secure Access Port) .....	4246
interface (Unknown Unicast Forwarding) .....	4247
location .....	4247
mac .....	4248
mac-limit .....	4249
mac-move-limit .....	4250
no-allowed-mac-log .....	4251
no-dhcp-trusted .....	4251
no-gratuitous-arp-request .....	4252
persistent-learning .....	4252
port-error-disable .....	4253
prefix (Remote ID for Option 82) .....	4254
remote-id .....	4255



	secure-access-port	4256
	static-ip	4257
	timeout (DHCP Snooping)	4258
	use-interface-description	4259
	use-string	4260
	use-vlan-id	4261
	vendor-id	4262
	vlan (Secure Access Port)	4263
	vlan (Static IP)	4264
	write-interval	4265
	Configuration Statements for Device Security	4266
	action-shutdown	4266
	bandwidth	4267
	ethernet-switching-options	4268
	interface (Storm Control)	4270
	no-broadcast	4271
	no-multicast	4271
	no-unknown-unicast	4272
	storm-control	4273
<b>Chapter 48</b>	<b>Administration</b>	<b>4275</b>
	Routine Monitoring	4275
	Monitoring Firewall Filter Traffic	4275
	Monitoring Traffic for All Firewall Filters and Policers That Are Configured	4275
	Monitoring Traffic for a Specific Firewall Filter	4276
	Monitoring Traffic for a Specific Policer	4276
	Monitoring Port Security	4277
	Verifying That Firewall Filters Are Operational	4278
	Verifying That DAI Is Working Correctly	4278
	Verifying That DHCP Snooping Is Working Correctly	4279
	Verifying That MAC Limiting Is Working Correctly	4280
	Verifying That MAC Limiting for Dynamic MAC Addresses Is Working Correctly	4281
	Verifying That Allowed MAC Addresses Are Working Correctly	4281
	Verifying That Interfaces Are Shut Down	4282
	Customizing the Ethernet Switching Table Display to View Information for a Specific Interface	4282
	Verifying That MAC Move Limiting Is Working Correctly	4283
	Verifying That the Port Error Disable Setting Is Working Correctly	4284
	Verifying That a Trusted DHCP Server Is Working Correctly	4284
	Verifying That Three-Color Policers Are Operational	4285
	Verifying That Two-Color Policers Are Operational	4286
	Verifying That Unknown Unicast Packets Are Forwarded to a Trunk Interface	4286
	Monitoring Commands	4287
	clear arp inspection statistics	4288
	clear dhcp snooping binding	4289
	clear ethernet-switching port-error	4290



	clear firewall . . . . .	4291
	show arp inspection statistics . . . . .	4292
	show dhcp snooping binding . . . . .	4293
	show firewall . . . . .	4295
	show firewall policer . . . . .	4299
	show interfaces filters . . . . .	4301
<b>Chapter 49</b>	<b>Troubleshooting . . . . .</b>	<b>4303</b>
	Troubleshooting Procedures . . . . .	4303
	Troubleshooting Firewall Filter Configuration . . . . .	4303
	Firewall Filter Configuration Returns a No Space Available in TCAM Message . . . . .	4303
	Filter Counts Previously Dropped Packet . . . . .	4305
	Matching Packets Not Counted . . . . .	4305
	Counter Reset When Editing Filter . . . . .	4306
	Cannot Include loss-priority and policer Actions in Same Term . . . . .	4306
	Cannot Egress Filter Certain Traffic Originating on QFX Switch . . . . .	4306
	Firewall Filter Match Condition Not Working with Q-in-Q Tunneling . . . . .	4307
	Egress Firewall Filters with Private VLANs . . . . .	4307
	Egress Filtering of L2PT Traffic Not Supported . . . . .	4308
	Cannot Drop BGP Packets in Certain Circumstances . . . . .	4308
	Invalid Statistics for Policer . . . . .	4308
	Troubleshooting Policer Configuration . . . . .	4308
	Incomplete Count of Packet Drops . . . . .	4308
	Counter Reset When Editing Filter . . . . .	4309
	Invalid Statistics for Policer . . . . .	4309
	Egress Policers on QFX3500 Might Allow More Throughput Than is Configured . . . . .	4309
<b>Part 16</b>	<b>Services</b>	
<b>Chapter 50</b>	<b>Overview . . . . .</b>	<b>4313</b>
	Port Mirroring . . . . .	4313
	Understanding Port Mirroring . . . . .	4313
	Port Mirroring Overview . . . . .	4313
	Port-Mirroring Terminology . . . . .	4314
	Port Mirroring Constraints and Limitations . . . . .	4315
	DHCP Relay . . . . .	4317
	DHCP and BOOTP Relay Overview . . . . .	4317
<b>Chapter 51</b>	<b>Configuration . . . . .</b>	<b>4319</b>
	Configuration Examples . . . . .	4319
	Example: Configuring Port Mirroring for Local Analysis . . . . .	4319
	Example: Configuring Port Mirroring for Remote Analysis . . . . .	4324
	Configuration Tasks . . . . .	4328
	Configuring Port Mirroring . . . . .	4328
	Configuring Port Mirroring for Local Analysis . . . . .	4329
	Configuring Port Mirroring for Remote Analysis . . . . .	4329



Filtering the Traffic Entering an Analyzer .....	4330
Configuring DHCP and BOOTP Relay .....	4331
Configuring a DHCP and BOOTP Relay Agent .....	4331
Configuring DHCP Smart Relay .....	4333
Configuration Statements for Port Mirroring .....	4334
analyzer .....	4335
egress .....	4336
ethernet-switching-options .....	4337
ingress (ethernet-switching-options) .....	4339
input .....	4340
interface (Port Mirroring) .....	4341
ip-address (Port Mirroring) .....	4342
output .....	4342
vlan (Port Mirroring) .....	4343
Configuration Statements for Encryption .....	4344
authentication-key-chains .....	4344
cache-size .....	4345
cache-timeout-negative .....	4346
ca-name .....	4346
certificates .....	4347
certification-authority .....	4348
crl (Encryption Interface) .....	4348
encoding .....	4349
enrollment-retry .....	4349
enrollment-url .....	4350
file .....	4350
key (Authentication Keychain) .....	4351
key-chain (Security) .....	4352
ldap-url .....	4353
local .....	4354
maximum-certificates .....	4355
path-length .....	4355
secret .....	4356
security .....	4357
ssh-known-hosts .....	4358
start-time (Authentication Key Transmission) .....	4359
traceoptions .....	4361
Configuration Statements for DHCP Relay .....	4363
apply-secondary-as-giaddr .....	4363
bootp .....	4364
broadcast .....	4365
client-response-ttl .....	4365
description (Forwarding Options) .....	4366
interface (BOOTP) .....	4367
maximum-hop-count .....	4368
minimum-wait-time .....	4368
no-listen .....	4369
server (DHCP and BOOTP Relay Agent) .....	4369



<b>Chapter 52</b>	<b>Administration</b> .....	<b>4371</b>
	Monitoring Commands for Port Mirroring .....	4371
	show analyzer .....	4372
<b>Chapter 53</b>	<b>Troubleshooting</b> .....	<b>4373</b>
	Troubleshooting Procedures .....	4373
	Troubleshooting Port Mirroring .....	4373
	Port Mirroring Constraints and Limitations .....	4373
	Egress Port Mirroring with VLAN Translation .....	4375
<b>Part 17</b>	<b>Storage</b>	
<b>Chapter 54</b>	<b>Overview</b> .....	<b>4379</b>
	Software Features Overview .....	4379
	Overview of Fibre Channel on the QFX Series .....	4380
	Fibre Channel Transport Protocol .....	4380
	How FC Works on the QFX Series .....	4381
	Supported FC Features and Functions .....	4383
	Lossless Transport Support .....	4383
	Overview of FIP .....	4384
	Fibre Channel, FCoE, and FIP .....	4385
	Understanding Fibre Channel .....	4385
	FC Fabrics .....	4386
	FC Port Types .....	4386
	FC Switches .....	4386
	Adapters .....	4387
	N_Port ID Virtualization (NPIV) .....	4387
	FC Services .....	4387
	Understanding DCB Features and Requirements .....	4389
	Lossless Transport .....	4389
	ETS .....	4390
	DCBX .....	4391
	Understanding FCoE .....	4392
	FCoE Devices .....	4392
	FCoE Frames .....	4394
	Virtual Links .....	4394
	FCoE VLANs .....	4395
	Understanding FCoE Transit Switch Functionality .....	4396
	Understanding an FCoE-FC Gateway .....	4399
	Gateway FC Fabric .....	4400
	Fabric Services .....	4401
	FCoE-FC Gateway Traffic Switching .....	4401
	Understanding FCoE-FC Gateway Functions .....	4403
	Login and Logout .....	4403
	FCoE and FC Frame Handling .....	4403
	Data Center Bridging .....	4403
	Disabling the Fabric WWN Verification Check .....	4404
	Load Balancing .....	4405



Understanding FCoE and FIP Session High Availability . . . . .	4405
Fibre Channel Process Termination High Availability (FCoE-FC Gateway Mode) . . . . .	4406
FIP Snooping High Availability . . . . .	4406
Nonstop Software Upgrade (QFabric Systems) . . . . .	4407
Understanding FIP Functions . . . . .	4408
FIP VLAN Discovery . . . . .	4408
FIP Discovery . . . . .	4409
FIP FLOGI . . . . .	4410
FIP FDISC . . . . .	4410
FIP Maintenance (Keepalive Messages) . . . . .	4411
FIP LOGO . . . . .	4411
Understanding FIP Implementation . . . . .	4412
FIP Basics . . . . .	4412
Fabric Login and FIP Login Overview . . . . .	4413
Proxy FIP Discovery . . . . .	4414
Proxy FIP Initialization . . . . .	4414
Proxy FIP Maintenance . . . . .	4415
Proxy FIP Logout . . . . .	4415
Understanding FIP Parameters on an FCoE-FC Gateway . . . . .	4416
FIP Keepalive Advertisement Period . . . . .	4416
Addressing Mode . . . . .	4416
FC-MAP . . . . .	4417
FCoE Trusted Fabric . . . . .	4418
Maximum Number of FCoE Sessions Per ENode . . . . .	4418
Priority . . . . .	4418
Understanding Fibre Channel Virtual Links . . . . .	4419
Understanding Interfaces on an FCoE-FC Gateway . . . . .	4420
Native FC Interfaces to the FC Switch . . . . .	4420
FIP Login Session Limits . . . . .	4422
Trusted and Untrusted Interfaces . . . . .	4425
Buffer-to-Buffer Credit Recovery . . . . .	4426
FCoE VLAN Interface to FCoE Devices . . . . .	4427
Assigning Interfaces to a Fibre Channel Fabric . . . . .	4430
Deleting a Fibre Channel Interface . . . . .	4430
Understanding Load Balancing in an FCoE-FC Gateway Proxy Fabric . . . . .	4431
Load-Balancing Algorithms . . . . .	4432
Load-Rebalancing Methods . . . . .	4436
NP_Port Interface FIP Session Limit Effect on Load Balancing . . . . .	4437
Load-Balancing Triggers and Timing . . . . .	4437
Load Rebalancing Behavior When a Link Goes Down . . . . .	4439
Interface Load Calculation Algorithm . . . . .	4440
Load-Balancing Scenarios . . . . .	4441
Load Balancing on the FCoE Interfaces (Ethernet Links) . . . . .	4446
Understanding OxID Hash Control for FCoE Traffic Load Balancing . . . . .	4447
Understanding VN_Port to VF_Port FIP Snooping on an FCoE Transit Switch . . . . .	4448
FC Network Security . . . . .	4449
VN2VF_Port FIP Snooping Functions . . . . .	4449



FIP Snooping Firewall Filters .....	4450
Session Scalability .....	4450
VN2VF_Port FIP Snooping Implementation .....	4450
T11 VN2VF_Port FIP Snooping Specification .....	4453
Understanding VN_Port to VN_Port FIP Snooping on an FCoE Transit Switch .....	4454
VN2VN_Port FIP Snooping and FIP Snooping Virtual Links .....	4454
VN2VN_Port Communication Modes .....	4455
Network Security .....	4455
VN2VN_Port FIP Snooping Functions .....	4456
Scalability .....	4456
VN2VN_Port FIP Snooping Implementation .....	4456
ENode-Facing Interfaces .....	4457
Network-Facing Interfaces (Connecting to Another Transit Switch) ..	4458
Beacon Period (VN2VN_Port FIP Snooping Link Maintenance) .....	4458
Understanding MC-LAGs on an FCoE Transit Switch .....	4459
Supported Topology .....	4459
FIP Snooping and FCoE Trusted Ports .....	4461
CoS and Data Center Bridging (DCB) .....	4462
Understanding DCBX .....	4463
DCBX Basics .....	4463
DCBX Modes and Support .....	4464
DCBX Attribute Types .....	4467
DCBX Application Protocol TLV Exchange .....	4468
DCBX and PFC .....	4469
DCBX and ETS .....	4469
Understanding DCBX Application Protocol TLV Exchange .....	4472
Applications .....	4472
Application Maps .....	4473
Classifying and Prioritizing Application Traffic .....	4474
Enabling Interfaces to Exchange Application Protocol Information ..	4475
Disabling DCBX Application Protocol Exchange .....	4475
Understanding CoS Flow Control (Ethernet PAUSE and PFC) .....	4476
Ethernet PAUSE .....	4477
PFC .....	4480
Lossless Transport Support .....	4482
Understanding Fibre Channel Terminology .....	4483
<b>Chapter 55 Configuration .....</b>	<b>4495</b>
Configuration Examples .....	4495
Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric .....	4495
Example: Configuring CoS PFC for FCoE Traffic .....	4509
Example: Configuring CoS for FCoE Transit Switch Traffic Across an MC-LAG .....	4517
Example: Configuring DCBX Application Protocol TLV Exchange .....	4540
Example: Configuring VN2VN_Port FIP Snooping (FCoE Hosts Directly Connected to the Same FCoE Transit Switch) .....	4551



Example: Configuring VN2VN_Port FIP Snooping (FCoE Hosts Directly Connected to Different FCoE Transit Switches) . . . . .	4555
Example: Configuring VN2VN_Port FIP Snooping (FCoE Hosts Indirectly Connected Through an Aggregation Layer FCoE Transit Switch) . . . .	4563
Example: Configuring Automated Fibre Channel Interface Load Rebalancing . . . . .	4572
Configuration Tasks . . . . .	4575
Configuring an FCoE-FC Gateway Fibre Channel Fabric . . . . .	4576
Disabling the Fabric WWN Verification Check . . . . .	4577
Configuring a Physical Fibre Channel Interface . . . . .	4578
Configuring a Fibre Channel Interface . . . . .	4579
Configuring an FCoE VLAN Interface . . . . .	4582
Assigning Interfaces to a Fibre Channel Fabric . . . . .	4584
Deleting a Fibre Channel Interface . . . . .	4585
Disabling Storm Control on FCoE Interfaces on an FCoE-FC Gateway . .	4586
Defining the Proxy Load-Balancing Algorithm . . . . .	4586
Simulating On-Demand Fibre Channel Link Load Rebalancing (Dry Run Test) . . . . .	4588
Enabling and Disabling CoS OxID Hash Control . . . . .	4589
Configuring FIP on an FCoE-FC Gateway . . . . .	4589
Setting the Maximum Number of FIP Login Sessions per ENode . . . . .	4592
Setting the Maximum Number of FIP Login Sessions per FC Interface . .	4593
Setting the Maximum Number of FIP Login Sessions per FC Fabric . . .	4594
Setting the Maximum Number of FIP Login Sessions per Node Device . .	4595
Configuring VN2VF_Port FIP Snooping on an FCoE Transit Switch . . . .	4596
Disabling VN2VF_Port FIP Snooping on an FCoE-FC Gateway Switch Interface . . . . .	4598
Enabling VN2VN_Port FIP Snooping and Configuring the Beacon Period on an FCoE Transit Switch . . . . .	4599
Configuring the DCBX Mode . . . . .	4600
Configuring DCBX Autonegotiation . . . . .	4601
Disabling the ETS Recommendation TLV . . . . .	4604
Defining an Application for DCBX Application Protocol TLV Exchange . .	4604
Configuring an Application Map for DCBX Application Protocol TLV Exchange . . . . .	4606
Applying an Application Map to an Interface for DCBX Application Protocol TLV Exchange . . . . .	4607
Configuration Statements . . . . .	4608
application (Application Maps) . . . . .	4608
application (Applications) . . . . .	4609
application-map . . . . .	4610
application-maps . . . . .	4611
applications (Applications) . . . . .	4612
applications (DCBX) . . . . .	4613
auto-load-rebalance . . . . .	4613
bb-sc-n . . . . .	4614
beacon-period . . . . .	4615
code-points (Application Maps) . . . . .	4616
dcbx . . . . .	4617



description (Fibre Channel Fabrics) . . . . .	4618
destination-port (Applications) . . . . .	4619
disable (DCBX) . . . . .	4620
enhanced-transmission-selection . . . . .	4621
ether-type . . . . .	4622
examine-fip . . . . .	4623
examine-vn2vn . . . . .	4624
fabric-id . . . . .	4625
fabric-type . . . . .	4625
family fcoe . . . . .	4626
fc2 . . . . .	4626
fc-fabrics . . . . .	4627
fc-map . . . . .	4629
fc-options . . . . .	4630
fcoe-trusted . . . . .	4631
fibre-channel (Family Interfaces) . . . . .	4632
fibre-channel (Port) . . . . .	4633
fibrenchannel-options . . . . .	4633
fip . . . . .	4634
fka-adv-period . . . . .	4635
interface (DCBX) . . . . .	4636
interface (Fibre Channel Fabric) . . . . .	4637
interface (FIP) . . . . .	4638
load-balance-algorithm . . . . .	4639
loopback (Fibre Channel Interface) . . . . .	4640
max-login-sessions . . . . .	4641
max-login-sessions-per-node . . . . .	4642
max-sessions-per-enode . . . . .	4643
mode (DCBX) . . . . .	4644
no-fabric-wwn-verify . . . . .	4645
oxid . . . . .	4646
policy-options . . . . .	4647
port-mode (Fibre Channel Interfaces) . . . . .	4648
port-range . . . . .	4649
priority (FIP) . . . . .	4650
priority-flow-control . . . . .	4651
protocol (Applications) . . . . .	4652
protocols (FIP) . . . . .	4653
proxy (Fibre Channel) . . . . .	4654
recommendation-tlv . . . . .	4654
speed (Fibre Channel Interfaces) . . . . .	4655
traceoptions (FC-2 Fibre Channel) . . . . .	4656
traceoptions (Fibre Channel) . . . . .	4658
traceoptions (FIP Protocol Fibre Channel) . . . . .	4661
traceoptions (Proxy Fibre Channel) . . . . .	4663



<b>Chapter 56</b>	<b>Administration</b>	<b>4665</b>
	Routine Monitoring	4665
	Monitoring Fibre Channel Interface Load Balancing	4665
	Monitoring the Interface Load-Balancing State	4665
	Monitoring the Fabric Load-Balancing Algorithm	4666
	Operational Commands	4670
	clear fibre-channel fc2 statistics	4671
	clear fibre-channel fip enode	4672
	clear fibre-channel fip statistics	4673
	clear fibre-channel fip vn-port	4674
	clear fibre-channel flogi statistics	4675
	clear fibre-channel proxy statistics	4676
	clear fip snooping enode	4677
	clear fip snooping statistics	4678
	clear fip snooping vlan	4679
	clear fip vlan-discovery statistics	4680
	request fibre-channel proxy load-rebalance	4681
	restart	4683
	show dcbx	4693
	show dcbx neighbors	4694
	show fibre-channel fabric	4718
	show fibre-channel fc2 sessions	4720
	show fibre-channel fc2 statistics	4722
	show fibre-channel fip	4724
	show fibre-channel fip enode	4729
	show fibre-channel fip fabric	4733
	show fibre-channel fip fcf	4736
	show fibre-channel fip interface	4739
	show fibre-channel fip statistics	4742
	show fibre-channel flogi fport	4746
	show fibre-channel flogi nport	4747
	show fibre-channel flogi statistics	4749
	show fibre-channel interfaces	4751
	show fibre-channel next-hops	4754
	show fibre-channel routes	4755
	show fibre-channel proxy fabric-state	4757
	show fibre-channel proxy login-table	4760
	show fibre-channel proxy np-port	4764
	show fibre-channel proxy statistics	4767
	show fip snooping	4770
	show fip snooping enode	4775
	show fip snooping fcf	4778
	show fip snooping interface	4780
	show fip snooping statistics	4783
	show fip snooping vlan	4786
	show fip vlan-discovery	4790
	show route forwarding-table family fibre-channel	4792



<b>Chapter 57</b>	<b>Troubleshooting</b> . . . . .	<b>4795</b>
	Troubleshooting Procedures . . . . .	4795
	Troubleshooting Dropped FCoE Traffic . . . . .	4795
	Troubleshooting Fibre Channel Interface Deletion . . . . .	4798
	Troubleshooting Dropped FIP Traffic . . . . .	4799
 <b>Part 18</b>	 <b>Traffic Management</b>	
<b>Chapter 58</b>	<b>Overview</b> . . . . .	<b>4803</b>
	Software Features Overview . . . . .	4803
	Overview of Junos OS CoS for the QFX Series . . . . .	4804
	CoS Standards . . . . .	4804
	How Junos CoS Works . . . . .	4805
	Default CoS Behavior . . . . .	4806
	Overview of CoS Upgrade Requirements (Junos OS Release 11.1 or 11.2 to a Later Release) . . . . .	4806
	Overview of CoS Upgrade Requirements to Junos OS Release 12.2 . . . .	4808
	Overview of CoS Upgrade Requirements to Junos OS Release 12.3 . . . .	4810
	Overview of CoS Changes Introduced in Junos OS Release 11.3 . . . . .	4812
	CoS Default Value Changes . . . . .	4812
	Queue Priority Configuration Changes . . . . .	4817
	Minimum Guaranteed Bandwidth (Transmit Rate and Guaranteed Rate) Changes . . . . .	4818
	Excess Rate Statement Disabled . . . . .	4818
	Queue Scheduling (Low and Strict-High Priority Queues) . . . . .	4819
	Multidestination Traffic Changes . . . . .	4819
	Overview of CoS Changes Introduced in Junos OS Release 12.2 . . . . .	4820
	Lossless Forwarding Classes (fcoe and no-loss) . . . . .	4820
	Default MTU for Headroom Buffer Calculation for Lossless Forwarding Classes . . . . .	4821
	CoS for Layer 3 Physical Interfaces . . . . .	4821
	DSCP IPv6 Classifiers and Rewrite Rules . . . . .	4821
	Overview of Policers . . . . .	4822
	Policer Overview . . . . .	4822
	Policer Types . . . . .	4823
	Policer Actions . . . . .	4824
	Policer Colors . . . . .	4824
	Suggested Naming Convention for Policers . . . . .	4825
	Policer Counters . . . . .	4825
	Policer Algorithms . . . . .	4825
	How Many Policers are Supported? . . . . .	4826
	CoS Overview . . . . .	4826
	Understanding Junos CoS Components . . . . .	4827
	Code-Point Aliases . . . . .	4827
	Policers . . . . .	4827
	Classifiers . . . . .	4827
	Forwarding Classes . . . . .	4828
	Forwarding Class Sets . . . . .	4828
	Flow Control (Ethernet PAUSE and Priority-Based Flow Control) . .	4829



Tail-Drop Profiles .....	4829
Schedulers .....	4830
Rewrite Rules .....	4830
Understanding CoS Packet Flow .....	4831
CoS Inputs and Outputs Overview .....	4833
Understanding Default CoS Settings .....	4834
Default Forwarding Classes and Queue Mapping .....	4834
Default Forwarding Class Sets (Priority Groups) .....	4835
Default Code-Point Aliases .....	4835
Default Classifiers .....	4837
Default Rewrite Rules .....	4840
Default Drop Profile .....	4840
Default Schedulers .....	4840
Default Scheduler Maps .....	4840
Default Shared Buffer Configuration .....	4841
Understanding Host Inbound Traffic Classification .....	4841
Understanding Host Routing Engine Outbound Traffic Queues and Defaults .....	4842
Understanding CoS Code-Point Aliases .....	4844
Default Code-Point Aliases .....	4844
Understanding CoS Classifiers .....	4846
Interfaces and Output Queues .....	4846
Behavior Aggregate Classifiers .....	4847
Fixed Classifiers on Ethernet Interfaces .....	4850
Fixed Classifiers on Native Fibre Channel Interfaces (NP_Ports) ...	4850
Multifield Classifiers .....	4850
Packet Classification for Routed VLAN Interfaces (RVIs) .....	4851
Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces ..	4851
Supported Classifier and Rewrite Rule Types .....	4852
Ethernet Interfaces Supported for Classifier and Rewrite Rule Configuration .....	4853
Default Classifiers .....	4854
Default Rewrite Rules .....	4855
Classifier Precedence .....	4855
Classifier Behavior and Limitations .....	4856
Rewrite Rule Precedence and Behavior .....	4857
Classifier and Rewrite Rule Configuration Interaction with Ethernet Interface Configuration .....	4857
Understanding CoS Forwarding Classes .....	4860
Default Forwarding Classes .....	4860
Forwarding Class Configuration Rules .....	4862
Lossless Transport Support .....	4863
Understanding CoS Forwarding Class Sets (Priority Groups) .....	4865
Understanding Default CoS Scheduling and Classification .....	4866
Default Classification .....	4866
Default Scheduling .....	4869
Default DCBX Advertisement .....	4870
Default Scheduling and Classification Summary .....	4870



Understanding CoS Hierarchical Port Scheduling (ETS) . . . . .	4872
Hierarchical Scheduling and ETS . . . . .	4873
ETS Advertisement in DCBX . . . . .	4874
Hierarchical Scheduling Process . . . . .	4874
Strict-High Priority Queues and Hierarchical Scheduling . . . . .	4875
Default Hierarchical Scheduling . . . . .	4875
Understanding CoS Output Queue Schedulers . . . . .	4876
Output Queue Scheduling Components . . . . .	4877
Default Schedulers . . . . .	4878
Transmit Rate (Minimum Guaranteed Bandwidth) . . . . .	4879
Sharing Extra Bandwidth . . . . .	4879
Shaping Rate (Maximum Bandwidth) . . . . .	4880
Scheduling Priority . . . . .	4880
Scheduler Drop-Profile Maps . . . . .	4881
Buffer Size . . . . .	4881
Scheduler Maps . . . . .	4882
Understanding CoS Priority Group Scheduling . . . . .	4883
Priority Group Scheduling Components . . . . .	4883
Default Traffic Control Profile . . . . .	4884
Guaranteed Rate (Minimum Guaranteed Bandwidth) . . . . .	4884
Sharing Extra Bandwidth . . . . .	4884
Shaping Rate (Maximum Bandwidth) . . . . .	4885
Scheduler Maps . . . . .	4885
Understanding CoS Traffic Control Profiles . . . . .	4886
Understanding CoS Priority Group and Queue Guaranteed Rates (Minimum Bandwidth) . . . . .	4887
Guaranteeing Bandwidth Using Hierarchical Scheduling . . . . .	4887
Priority Group Guaranteed Rate (Minimum Bandwidth) . . . . .	4889
Queue Transmit Rate (Minimum Bandwidth) . . . . .	4889
Understanding CoS Priority Group Shaping and Queue Shaping (Maximum Bandwidth) . . . . .	4890
Priority Group Shaping . . . . .	4890
Queue Shaping . . . . .	4890
Shaping Maximum Bandwidth Using Hierarchical Scheduling . . . . .	4891
Understanding CoS Scheduling Behavior and Configuration	
Considerations . . . . .	4892
Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows . . . . .	4896
Default Lossless Priority Configuration . . . . .	4897
Configuring Lossless Priorities . . . . .	4899
Backward Compatibility with Junos OS Releases Earlier Than Release 12.3 . . . . .	4909
Configuration Rules and Recommendations . . . . .	4910
Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC	
Gateway . . . . .	4911
Priority Remapping Configuration . . . . .	4911
Configuration Rules . . . . .	4912
Fate Sharing . . . . .	4913



Understanding CoS Buffer Configuration . . . . .	4914
Buffer Pools . . . . .	4915
Shared Buffer Configuration Recommendations for Different Network Traffic Scenarios . . . . .	4923
Optimizing the Buffer Configuration . . . . .	4926
Understanding CoS Tail-Drop Profiles . . . . .	4929
Drop Profile Parameters . . . . .	4929
Default Drop Profile . . . . .	4930
Packet Drop Method . . . . .	4931
Drop Profile Maps . . . . .	4932
Congestion Prevention . . . . .	4932
Understanding CoS Rewrite Rules . . . . .	4933
Understanding DCB Features and Requirements . . . . .	4934
Lossless Transport . . . . .	4935
ETS . . . . .	4936
DCBX . . . . .	4936
Understanding CoS Flow Control (Ethernet PAUSE and PFC) . . . . .	4938
Ethernet PAUSE . . . . .	4938
PFC . . . . .	4942
Lossless Transport Support . . . . .	4944
Understanding DCBX . . . . .	4946
DCBX Basics . . . . .	4946
DCBX Modes and Support . . . . .	4947
DCBX Attribute Types . . . . .	4950
DCBX Application Protocol TLV Exchange . . . . .	4951
DCBX and PFC . . . . .	4952
DCBX and ETS . . . . .	4952
Understanding DCBX Application Protocol TLV Exchange . . . . .	4955
Applications . . . . .	4955
Application Maps . . . . .	4956
Classifying and Prioritizing Application Traffic . . . . .	4957
Enabling Interfaces to Exchange Application Protocol Information . . . . .	4958
Disabling DCBX Application Protocol Exchange . . . . .	4958
<b>Chapter 59 Configuration . . . . .</b>	<b>4961</b>
Configuration Examples . . . . .	4961
Example: Configuring CoS Hierarchical Port Scheduling (ETS) . . . . .	4962
Example: Configuring CoS PFC for FCoE Traffic . . . . .	4983
Example: Configuring CoS for FCoE Transit Switch Traffic Across an MC-LAG . . . . .	4991
Example: Configuring Unicast Classifiers . . . . .	5014
Example: Configuring Multidestination (Multicast, Broadcast, DLF) Classifiers . . . . .	5017
Example: Configuring Tail-Drop Profiles . . . . .	5019
Example: Configuring Drop Profile Maps . . . . .	5022
Example: Configuring Forwarding Classes . . . . .	5024
Example: Configuring Forwarding Class Sets . . . . .	5027
Example: Configuring Queue Schedulers . . . . .	5030
Example: Configuring Queue Scheduling Priority . . . . .	5035



Example: Configuring Traffic Control Profiles (Priority Group Scheduling) . . . . .	5037
Example: Configuring Minimum Guaranteed Output Bandwidth . . . . .	5040
Example: Configuring Maximum Output Bandwidth . . . . .	5044
Example: Configuring Lossless FCoE Traffic When the Converged Ethernet Network Does Not Use IEEE 802.1p Priority 3 for FCoE Traffic (FCoE Transit Switch) . . . . .	5048
Example: Configuring Two or More Lossless FCoE Priorities on the Same FCoE Transit Switch Interface . . . . .	5056
Example: Configuring Two or More Lossless FCoE IEEE 802.1p Priorities on Different FCoE Transit Switch Interfaces . . . . .	5065
Example: Configuring Lossless IEEE 802.1p Priorities on Ethernet Interfaces for Multiple Applications (FCoE and iSCSI) . . . . .	5078
Example: Configuring IEEE 802.1p Priority Remapping on an FCoE-FC Gateway . . . . .	5094
Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Best-Effort Unicast Traffic . . . . .	5103
Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Multicast Traffic . . . . .	5109
Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Lossless Traffic . . . . .	5114
Example: Configuring DCBX Application Protocol TLV Exchange . . . . .	5120
Configuration Tasks . . . . .	5130
Configuring CoS . . . . .	5131
Defining CoS Code-Point Aliases . . . . .	5133
Defining CoS Unicast BA Classifiers . . . . .	5133
Defining CoS Multidestination (Multicast, Broadcast, DLF) BA Classifiers . . . . .	5135
Configuring CoS Tail-Drop Profiles . . . . .	5136
Configuring CoS Drop Profile Maps . . . . .	5137
Defining CoS Forwarding Classes . . . . .	5137
Defining CoS Forwarding Class Sets . . . . .	5139
Defining CoS Queue Schedulers . . . . .	5139
Defining CoS Queue Scheduling Priority . . . . .	5142
Changing the Host Outbound Traffic Default Queue Mapping . . . . .	5143
Defining CoS Traffic Control Profiles (Priority Group Scheduling) . . . . .	5143
Configuring CoS PFC (Congestion Notification Profiles) . . . . .	5145
Enabling and Disabling CoS Symmetric Ethernet PAUSE Flow Control . . . . .	5148
Configuring CoS Asymmetric Ethernet PAUSE Flow Control . . . . .	5149
Configuring CoS Fixed Classifier Rewrite Values for Native FC Interfaces (NP_Ports) . . . . .	5151
Configuring Global Ingress and Egress Shared Buffers . . . . .	5153
Defining CoS Rewrite Rules . . . . .	5155
Assigning CoS Components to Interfaces . . . . .	5157
Configuring the DCBX Mode . . . . .	5158
Configuring DCBX Autonegotiation . . . . .	5159
Disabling the ETS Recommendation TLV . . . . .	5162
Defining an Application for DCBX Application Protocol TLV Exchange . . . . .	5162



Configuring an Application Map for DCBX Application Protocol TLV Exchange	5164
Applying an Application Map to an Interface for DCBX Application Protocol TLV Exchange	5165
Configuration Statements	5166
application (Application Maps)	5166
application (Applications)	5167
application-map	5168
application-maps	5169
applications (Applications)	5170
applications (DCBX)	5171
buffer-partition (Egress)	5172
buffer-partition (Ingress)	5174
buffer-size	5176
cable-length (Congestion Notification)	5178
class-of-service	5179
class (Forwarding Classes)	5183
class (Forwarding Class Sets)	5184
classifiers	5185
code-point (Fibre Channel Interfaces)	5186
code-point (Input Congestion Notification)	5187
code-point (Output Congestion Notification)	5188
code-point (Rewrite Rules)	5189
code-point-aliases	5189
code-points (Application Maps)	5190
code-points (CoS)	5190
configured-flow-control	5191
congestion-notification-profile	5192
dcbx	5194
destination-port (Applications)	5195
disable (DCBX)	5196
drop-probability	5197
drop-profile	5198
drop-profile-map	5198
drop-profiles	5199
dscp	5200
dscp-ipv6	5202
dscp-code-point	5203
egress (Buffer Configuration)	5204
enhanced-transmission-selection	5205
ether-type	5206
fill-level	5207
flow-control	5208
flow-control-queue (Output Congestion Notification)	5209
family fcoe	5210
forwarding-class	5211
forwarding-class (Fibre Channel Interfaces)	5212
forwarding-class (Host Outbound Traffic)	5213
forwarding-class-set (Node Device)	5214



forwarding-class-sets	5214
forwarding-classes	5215
guaranteed-rate	5217
host-outbound-traffic	5218
ieee-802.1	5219
ieee-802.1 (Fibre Channel Interfaces)	5220
ieee-802.1 (Input Congestion Notification)	5221
ieee-802.1 (Output Congestion Notification)	5222
import	5223
ingress (Buffer Configuration)	5224
input (Congestion Notification)	5225
input (Fibre Channel Interfaces)	5226
interface (DCBX)	5227
interfaces (Class of Service)	5228
interpolate	5229
loss-priority (Classifiers)	5230
loss-priority (Drop Profiles)	5231
loss-priority (Rewrite Rules)	5232
multi-destination	5233
mode (DCBX)	5234
mru	5235
output (Congestion Notification)	5236
output-traffic-control-profile	5237
pfc (Input Congestion Notification)	5238
policy-options	5239
priority (Schedulers)	5240
priority-flow-control	5241
protocol (Applications)	5242
protocol (Drop Profile Map)	5243
queue-num	5244
recommendation-tlv	5245
rewrite-rules	5246
rewrite-value (Fibre Channel Interfaces)	5247
rx-buffers	5249
scheduler (Node Device)	5250
scheduler-map	5250
scheduler-maps	5251
schedulers	5252
shaping-rate	5253
shared-buffer	5255
traceoptions (Class of Service)	5257
traffic-control-profiles	5259
transmit-rate	5260
tx-buffers	5262
unit	5263



<b>Chapter 60</b>	<b>Administration</b>	<b>5265</b>
	Routine Monitoring	5265
	Monitoring CoS Classifiers	5265
	Monitoring CoS Forwarding Classes	5266
	Monitoring Interfaces That Have CoS Components	5267
	Monitoring CoS Rewrite Rules	5268
	Monitoring CoS Scheduler Maps	5269
	Monitoring CoS Value Aliases	5270
	Operational Commands	5271
	show class-of-service	5272
	show class-of-service classifier	5277
	show class-of-service code-point-aliases	5279
	show class-of-service congestion-notification	5281
	show class-of-service drop-profile	5283
	show class-of-service forwarding-class	5286
	show class-of-service forwarding-class-set	5288
	show class-of-service forwarding-table	5290
	show class-of-service forwarding-table classifier	5293
	show class-of-service forwarding-table classifier mapping	5295
	show class-of-service forwarding-table drop-profile	5296
	show class-of-service forwarding-table rewrite-rule	5298
	show class-of-service forwarding-table rewrite-rule mapping	5300
	show class-of-service forwarding-table scheduler-map	5301
	show class-of-service interface	5303
	show class-of-service multi-destination	5329
	show class-of-service rewrite-rule	5330
	show class-of-service scheduler-map	5332
	show class-of-service shared-buffer	5334
	show class-of-service traffic-control-profile	5336
	show dcbx	5340
	show dcbx neighbors	5341
	show interfaces queue	5365
	show pfe next-hop	5404
	show pfe route	5408
	show pfe terse	5413
	show pfe version	5415
<b>Chapter 61</b>	<b>Troubleshooting</b>	<b>5417</b>
	Troubleshooting Procedures	5417
	Troubleshooting Dropped FCoE Traffic	5417
	Troubleshooting Egress Bandwidth That Exceeds the Configured Maximum Bandwidth	5420
	Troubleshooting Egress Bandwidth That Exceeds the Configured Minimum Bandwidth	5421
	Troubleshooting Egress Queue Bandwidth Impacted by Congestion	5422
	Troubleshooting an Unexpected Rewrite Value	5423
	Troubleshooting a Port Reset on QFabric Systems When a Queue Stops Transmitting Traffic	5424



## Part 19

## Network Management and Monitoring

## Chapter 62

<b>Overview</b>	<b>5429</b>
Network Management	5429
Understanding Device and Network Management Features	5429
Understanding Network Management Implementation on the QFabric System	5432
Understanding Telnet on the QFabric System	5433
Understanding Tracing and Logging Operations	5433
Automation Scripts	5435
Understanding Automation Scripts Support	5435
How Commit Scripts Work	5436
Commit Script Input	5437
Commit Script Output	5438
Commit Scripts and the Junos OS Commit Model	5439
Avoiding Potential Conflicts When Using Multiple Commit Scripts	5441
Overview of Generating Persistent or Transient Configuration Changes	5442
Differences Between Persistent and Transient Changes	5443
Interaction of Configuration Changes and Configuration Groups	5446
Tag Elements and Templates for Generating Changes	5446
Required Boilerplate for Commit Scripts	5447
How Op Scripts Work	5448
Required Boilerplate for Op Scripts	5449
Fabric OAM	5451
Overview of Internal Fabric Monitoring	5451
Junos Space	5453
Understanding Junos Space Support	5453
Preparing the Device for Junos Space Management	5456
sFlow Technology	5456
Overview of sFlow Technology	5456
SNMP	5458
Understanding the Implementation of SNMP	5459
Understanding the Implementation of SNMP on the QFabric System	5461
Fabric Chassis MIB	5464
Utility MIB	5467
SNMPv3 Overview	5468
Minimum SNMPv3 Configuration on a Device Running Junos OS	5469
Understanding RMON	5470
RMON Overview	5470
Alarm Thresholds and Events	5471
RMON MIB Event, Alarm, Log, and History Control Tables	5472
Understanding Health Monitoring	5474
Standard SNMP MIBs	5475
Juniper Networks Enterprise-Specific MIBs	5484
MIB Objects for the QFX Series	5490
QFX3500 and QFX3600 Switches	5491
QFabric Systems	5491
QFabric System Node Devices	5491
QFabric System QFX3008-I Interconnect Device	5491



	QFabric System QFX3600-I Interconnect Device . . . . .	5492
	Virtual Chassis (Control Plane Switch) . . . . .	5492
	Standard SNMP Version 1 Traps . . . . .	5492
	Standard SNMP Version 2 Traps . . . . .	5495
	Juniper Networks Enterprise-Specific SNMP Version 1 Traps . . . . .	5498
	Juniper Networks Enterprise-Specific SNMP Version 2 Traps . . . . .	5500
	System Log Messages . . . . .	5505
	Overview of Junos OS System Log Messages . . . . .	5505
	Overview of Single-Chassis System Logging Configuration . . . . .	5505
	Understanding the Implementation of System Log Messages on the QFabric System . . . . .	5507
<b>Chapter 63</b>	<b>Configuration . . . . .</b>	<b>5509</b>
	Configuration Examples . . . . .	5509
	Examples: Configuring System Logging . . . . .	5509
	Examples: Assigning an Alternative Facility . . . . .	5511
	Example: Configuring System Log Messages . . . . .	5512
	Example: Monitoring Network Traffic Using sFlow Technology . . . . .	5514
	Example: Configuring SNMP . . . . .	5518
	Configuration Tasks for Network Management . . . . .	5521
	Configuring Console and Auxiliary Port Properties . . . . .	5521
	Configuring SSH Service for Remote Access to the Router or Switch . . . . .	5522
	Configuring the Root Login Through SSH . . . . .	5522
	Configuring the SSH Protocol Version . . . . .	5523
	Configuring the Client Alive Mechanism . . . . .	5523
	Configuring Telnet Service for Remote Access to a Switch . . . . .	5524
	Configuration Tasks for Automation Scripts . . . . .	5524
	Controlling the Execution of Commit Scripts . . . . .	5524
	Enabling Commit Scripts to Execute . . . . .	5525
	Removing Commit Scripts from the Configuration . . . . .	5525
	Deactivating Commit Scripts . . . . .	5526
	Activating Inactive Commit Scripts . . . . .	5526
	Configuration Tasks for Fabric OAM . . . . .	5527
	Configuring a Fabric Maintenance Association . . . . .	5527
	Configuring Flow Specifications . . . . .	5528
	Configuring a Unicast Ethernet Flow Specification . . . . .	5529
	Configuring a Unicast Ethernet IPv4 Flow Specification . . . . .	5530
	Configuring a Multicast IPv4 Flow Specification . . . . .	5531
	Configuring a Multicast VLAN Flood Flow Specification . . . . .	5531
	Configuration Tasks for sFlow Technology . . . . .	5532
	Configuring sFlow Technology . . . . .	5532
	Configuration Tasks for SNMP . . . . .	5533
	Configuring SNMP . . . . .	5534
	Configuring the SNMP Community String . . . . .	5537
	Configuring SNMP Trap Groups . . . . .	5538
	Adding a Group of Clients to an SNMP Community . . . . .	5539
	Configuring the Interfaces on Which SNMP Requests Can Be Accepted . . . . .	5540



Configuring MIB Views . . . . .	5541
Configuring RMON Alarms and Events . . . . .	5541
Configuring SNMP . . . . .	5542
Configuring an Event . . . . .	5542
Configuring an Alarm . . . . .	5543
Configuring Health Monitoring . . . . .	5544
Creating SNMPv3 Users . . . . .	5544
Configuring Access Privileges for a Group . . . . .	5546
Assigning a Security Name to a Group . . . . .	5547
Configuring SNMPv3 Traps on a Device Running Junos OS . . . . .	5548
Configuring SNMP Informs . . . . .	5549
Configuration Tasks for System Log Messages . . . . .	5550
Junos OS Minimum System Logging Configuration . . . . .	5551
Junos OS System Log Configuration Statements . . . . .	5551
Adding a Text String to System Log Messages . . . . .	5552
Directing System Log Messages to a Log File . . . . .	5553
Directing System Log Messages to a Remote Machine . . . . .	5554
Directing System Log Messages to a User Terminal . . . . .	5554
Directing System Log Messages to the Console . . . . .	5555
Disabling the System Logging of a Facility . . . . .	5555
Displaying a Log File from a Single-Chassis System . . . . .	5556
Including Priority Information in System Log Messages . . . . .	5557
Including the Year or Millisecond in Timestamps . . . . .	5558
Logging Messages in Structured-Data Format . . . . .	5559
Interpreting Messages Generated in Structured-Data Format . . . . .	5560
Interpreting Messages Generated in Standard Format . . . . .	5563
Specifying Log File Size, Number, and Archiving Properties . . . . .	5563
Specifying the Facility and Severity of Messages to Include in the Log . . . . .	5565
Junos OS System Logging Facilities and Message Severity Levels . . . . .	5566
System Log Default Facilities for Messages Directed to a Remote Destination . . . . .	5567
Junos OS System Log Alternate Facilities for Remote Logging . . . . .	5568
Changing the Alternative Facility Name for Remote System Log Messages . . . . .	5569
Using Regular Expressions to Refine the Set of Logged Messages . . . . .	5570
Configuration Statements for Network Management . . . . .	5573
connection-limit . . . . .	5573
destination-override . . . . .	5574
no-remote-trace . . . . .	5574
protocol-version . . . . .	5575
rate-limit . . . . .	5576
ssh . . . . .	5577
telnet . . . . .	5578
tracing . . . . .	5579
Configuration Statements for Automation Scripts . . . . .	5580
allow-transients . . . . .	5580
apply-macro . . . . .	5581
checksum . . . . .	5582
command . . . . .	5583



commit	5584
description	5585
direct-access	5585
file (Commit Scripts)	5586
file (Op Scripts)	5587
no-allow-url	5588
op	5589
optional	5590
refresh (Commit Scripts)	5591
refresh (Op Scripts)	5592
refresh-from (Commit Scripts)	5593
refresh-from (Op Scripts)	5594
scripts	5595
source (Commit Scripts)	5596
source (Op Scripts)	5597
Configuration Statements for Fabric OAM	5598
ethernet-frame-size	5598
fabric (OAM)	5599
fabric-maintenance-associations	5601
fabric-maintenance-end-points	5602
flow-specs	5603
unicast-ethernet-ipv4	5605
multicast-ipv4	5607
multicast-vlan-flood	5608
unicast-ethernet	5609
Configuration Statements for sFlow Technology	5610
agent-id	5610
collector	5610
interfaces (sFlow)	5611
polling-interval	5612
sample-rate	5613
sflow	5614
source-ip	5615
traceoptions (sFlow Technology)	5616
udp-port	5617
Configuration Statements for SNMP	5618
access (SNMP)	5618
address (SNMP)	5618
address-mask	5619
agent-address	5619
alarm (SNMP RMON)	5620
authentication-md5	5621
authentication-none	5622
authentication-password	5623
authentication-sha	5624
authorization	5625
bucket-size	5626
categories	5626
client-list	5627



client-list-name	5627
clients	5628
commit-delay	5628
community (SNMP)	5629
community (RMON)	5630
community-name (SNMP)	5631
contact	5632
description (SNMP)	5632
description (RMON)	5633
destination-port (SNMP)	5633
engine-id	5634
event	5635
falling-event-index (RMON)	5636
falling-threshold (Health Monitor)	5637
falling-threshold (RMON)	5638
falling-threshold-interval	5639
filter-duplicates	5639
filter-interfaces	5640
group (Associating a Security Name)	5640
group (Configuring Access Privileges)	5641
health-monitor	5642
history	5643
interface (SNMP)	5644
interface (RMON)	5645
interval (Health Monitor)	5645
interval (RMON)	5646
local-engine	5647
location	5648
message-processing-model	5648
name	5649
nonvolatile	5649
notify	5650
notify-filter (Applying to the Management Target)	5651
notify-filter (Configuring the Profile Name)	5651
notify-view	5652
oid	5652
oid (SNMPv3)	5653
owner	5653
parameters	5654
port (SNMP)	5654
privacy-3des	5655
privacy-aes128	5656
privacy-des	5657
privacy-none	5657
privacy-password	5658
read-view	5659
remote-engine	5660
request-type	5661
retry-count (SNMPv3)	5662



rising-event-index	5663
rising-threshold (Health Monitor)	5664
rising-threshold (RMON)	5665
rmon	5666
sample-type	5667
security-level (Defining Access Privileges)	5668
security-level (Generating SNMP Notifications)	5669
security-model (Access Privileges)	5670
security-model (Group)	5671
security-model (SNMP Notifications)	5672
security-name (Community String)	5673
security-name (Security Group)	5674
security-name (SNMP Notifications)	5675
security-to-group	5676
snmp	5677
snmp-community	5681
source-address (SNMP)	5681
startup-alarm	5682
syslog-subtag	5683
tag (Configuring Notification Targets)	5683
tag (Configuring the SNMP Community)	5684
tag-list	5684
target-address	5685
target-parameters	5686
targets	5687
timeout	5687
traceoptions (SNMP)	5688
trap-group	5690
trap-options	5691
type (RMON Notification)	5692
type (SNMPv3)	5693
user	5693
usm	5694
v3	5696
vacm	5698
variable	5699
version	5700
view (Configuring a MIB View)	5701
view (Associating MIB View with a Community)	5702
write-view	5702
Configuration Statements for System Log Messages	5703
archive (All System Log Files)	5704
archive (Individual System Log File)	5706
archive (QFabric System)	5707
console (System Logging)	5708
explicit-priority	5709
facility-override	5709
file (QFabric System)	5710
file (System Logging)	5711



	files	5712
	host (System)	5713
	log-prefix (System)	5715
	match	5715
	size (System)	5716
	structured-data	5717
	syslog (System)	5718
	syslog (QFabric System)	5719
	time-format	5720
	user (System Logging)	5721
<b>Chapter 64</b>	<b>Administration</b>	<b>5723</b>
	Routine Monitoring Using the CLI	5723
	Displaying a Log File from a Single-Chassis System	5723
	Monitoring Traffic Through the Router or Switch	5724
	Displaying Real-Time Statistics About All Interfaces on the Router or Switch	5724
	Displaying Real-Time Statistics About an Interface on the Router or Switch	5725
	Monitoring RMON MIB Tables	5727
	Monitoring SNMP	5728
	Monitoring System Log Messages	5729
	Pinging Hosts	5730
	Tracing SNMP Activity on a Device Running Junos OS	5731
	Configuring the Number and Size of SNMP Log Files	5732
	Configuring Access to the Log File	5733
	Configuring a Regular Expression for Lines to Be Logged	5733
	Configuring the Trace Operations	5733
	Using the Enterprise-Specific Utility MIB to Enhance SNMP Coverage	5735
	Displaying Commit Script Output	5737
	Monitoring Commands	5738
	clear sflow collector statistics	5739
	clear snmp history	5740
	clear snmp statistics	5741
	monitor traffic	5743
	ping	5753
	ping fabric multicast-flow	5757
	ping fabric unicast-flow	5759
	request snmp spoof-trap	5762
	request snmp utility-mib clear instance	5768
	request snmp utility-mib set instance	5769
	show oam fabric flow-specification	5770
	show oam fabric interfaces	5773
	show log	5775
	show sflow	5778
	show sflow collector	5780
	show sflow interface	5781
	show snmp health-monitor	5783
	show snmp inform-statistics	5788



	show snmp mib .....	5790
	show snmp rmon .....	5794
	show snmp rmon history .....	5798
	show snmp statistics .....	5799
	show snmp v3 .....	5803
	traceroute fabric unicast-flow .....	5806
<b>Chapter 65</b>	<b>Troubleshooting .....</b>	<b>5809</b>
	Troubleshooting Overview .....	5809
	Understanding Troubleshooting Resources .....	5809
	Troubleshooting Overview .....	5811
	Troubleshooting Procedures .....	5813
	Recovering from a Failed Software Installation .....	5813
	Loading a Previous Configuration File .....	5814
	Reverting to the Default Factory Configuration .....	5815
	Reverting to the Rescue Configuration .....	5816
	Recovering the Root Password .....	5816
<b>Part 20</b>	<b>Troubleshooting</b>	
<b>Chapter 66</b>	<b>Overview .....</b>	<b>5821</b>
	General Troubleshooting .....	5821
	Understanding Troubleshooting Resources .....	5821
	Troubleshooting Overview .....	5823
	Alarms .....	5825
	Understanding Alarms .....	5825
	Chassis Alarm Messages on a QFX3500 Device .....	5826
	Interface Alarm Messages .....	5829
<b>Chapter 67</b>	<b>Administration .....</b>	<b>5831</b>
	Routine Monitoring Using the CLI .....	5831
	Monitoring SNMP .....	5831
	Tracing SNMP Activity on a Device Running Junos OS .....	5833
	Configuring the Number and Size of SNMP Log Files .....	5834
	Configuring Access to the Log File .....	5834
	Configuring a Regular Expression for Lines to Be Logged .....	5834
	Configuring the Trace Operations .....	5834
	Monitoring RMON MIB Tables .....	5836
	Displaying a Log File from a Single-Chassis System .....	5837
	Monitoring System Log Messages .....	5838
	Monitoring Traffic Through the Router or Switch .....	5839
	Displaying Real-Time Statistics About All Interfaces on the Router or Switch .....	5839
	Displaying Real-Time Statistics About an Interface on the Router or Switch .....	5839
	Pinging Hosts .....	5841



<b>Chapter 68</b>	<b>Troubleshooting</b>	<b>5843</b>
	Junos OS Basics	5843
	Rebooting and Halting a QFX Series Product	5843
	Recovering from a Failed Software Installation	5844
	Recovering the Root Password	5845
	Creating an Emergency Boot Device for a QFX Series Device	5847
	Performing a Recovery Installation on a QFX3008-I, QFX3600-I, QFX3600, or QFX3500 Device	5848
	Performing a QFabric System Recovery Installation on the Director Group	5850
	(Optional) Creating an Emergency Boot Device Using a Juniper Networks External Blank USB Flash Drive	5851
	Performing a Recovery Installation Using a Juniper Networks External USB Flash Drive with Preloaded Software	5852
	Configuration and File Management	5856
	Loading a Previous Configuration File	5856
	Reverting to the Default Factory Configuration	5857
	Reverting to the Rescue Configuration	5857
	Cleaning Up the System File Storage Space	5858
	Ethernet Switching	5859
	Troubleshooting Ethernet Switching	5859
	Troubleshooting Layer 2 Protocol Tunneling	5860
	Drop Threshold Statistics Might Be Incorrect	5860
	Egress Filtering of L2PT Traffic Not Supported	5860
	Troubleshooting Private VLANs	5861
	Limitations of Private VLANs	5861
	Forwarding with Private VLANs	5861
	Egress Firewall Filters with Private VLANs	5862
	Troubleshooting Q-in-Q and VLAN Translation Configuration	5863
	Firewall Filter Match Condition Not Working with Q-in-Q Tunneling	5863
	Egress Port Mirroring with VLAN Translation	5863
	High Availability	5864
	Troubleshooting VRRP	5864
	Interfaces	5864
	Troubleshooting an Aggregated Ethernet Interface	5864
	Troubleshooting Network Interfaces	5865
	The interface on the port in which an SFP or SFP+ transceiver is installed in an SFP or SFP+ module is down	5865
	Layer 3 Protocols	5865
	Troubleshooting Virtual Routing Instances	5865
	Direct Routes Not Leaked Between Routing Instances	5865
	Security	5866
	Troubleshooting Firewall Filter Configuration	5866
	Firewall Filter Configuration Returns a No Space Available in TCAM Message	5866
	Filter Counts Previously Dropped Packet	5868
	Matching Packets Not Counted	5868
	Counter Reset When Editing Filter	5869
	Cannot Include loss-priority and policer Actions in Same Term	5869



Cannot Egress Filter Certain Traffic Originating on QFX Switch . . . . .	5869
Firewall Filter Match Condition Not Working with Q-in-Q Tunneling . .	5869
Egress Firewall Filters with Private VLANs . . . . .	5870
Egress Filtering of L2PT Traffic Not Supported . . . . .	5871
Cannot Drop BGP Packets in Certain Circumstances . . . . .	5871
Invalid Statistics for Policer . . . . .	5871
Troubleshooting Policer Configuration . . . . .	5871
Incomplete Count of Packet Drops . . . . .	5871
Counter Reset When Editing Filter . . . . .	5872
Invalid Statistics for Policer . . . . .	5872
Egress Policers on QFX3500 Might Allow More Throughput Than is Configured . . . . .	5872
Services . . . . .	5873
Troubleshooting Port Mirroring . . . . .	5873
Port Mirroring Constraints and Limitations . . . . .	5873
Egress Port Mirroring with VLAN Translation . . . . .	5875
Storage . . . . .	5875
Troubleshooting Dropped FCoE Traffic . . . . .	5875
Troubleshooting Fibre Channel Interface Deletion . . . . .	5878
Troubleshooting Dropped FIP Traffic . . . . .	5879
Traffic Management . . . . .	5880
Troubleshooting Egress Bandwidth That Exceeds the Configured Maximum Bandwidth . . . . .	5880
Troubleshooting Egress Bandwidth That Exceeds the Configured Minimum Bandwidth . . . . .	5881
Troubleshooting Egress Queue Bandwidth Impacted by Congestion . . . .	5882
Troubleshooting an Unexpected Rewrite Value . . . . .	5883
Troubleshooting a Port Reset on QFabric Systems When a Queue Stops Transmitting Traffic . . . . .	5884







# List of Figures

<b>Part 1</b>	<b>QFX3500 Switch Overview</b>	
<b>Chapter 1</b>	<b>QFX3500 Switch Overview</b>	<b>3</b>
	Figure 1: QFX3500 Device Front	4
	Figure 2: QFX3500 Device Rear	4
	Figure 3: SFP+ Access Port Locations	5
	Figure 4: QSFP+ Uplink Port Locations	6
<b>Part 2</b>	<b>QFX3600 Switch Overview</b>	
<b>Chapter 2</b>	<b>QFX3600 Switch Overview</b>	<b>9</b>
	Figure 5: QFX3600 Chassis Front	10
	Figure 6: QFX3600 Chassis Rear	10
<b>Part 3</b>	<b>Junos OS Basics</b>	
<b>Chapter 3</b>	<b>Overview</b>	<b>15</b>
	Figure 7: DHCP Client/Server Model	40
	Figure 8: DHCP Four-Step Transfer	42
	Figure 9: Commands That Combine Other Commands	50
	Figure 10: CLI Command Hierarchy	54
	Figure 11: Command Output Options	55
	Figure 12: Configuration Mode Hierarchy of Statements	60
<b>Part 4</b>	<b>Configuration and File Management</b>	
<b>Chapter 9</b>	<b>Configuration</b>	<b>1115</b>
	Figure 13: Overriding the Current Configuration	1146
	Figure 14: Using the replace Option	1147
	Figure 15: Using the merge Option	1147
	Figure 16: Using a Patch File	1148
	Figure 17: Using the set Option	1148
<b>Part 6</b>	<b>Ethernet Features</b>	
<b>Chapter 15</b>	<b>Overview</b>	<b>1379</b>
	Figure 18: Subdomains in a PVLAN	1391
	Figure 19: PVLAN Spanning Multiple Switches	1392
	Figure 20: Community VLAN Sends Untagged Traffic	1396
	Figure 21: Isolated VLAN Sends Untagged Traffic	1397
	Figure 22: PVLAN Tagged Traffic Sent on a Promiscuous Port	1398
	Figure 23: Two Secondary VLAN Trunk Ports on One Interface	1402



	Figure 24: Secondary VLAN Trunk and Promiscuous Trunk on One Interface . . .	1404
	Figure 25: Secondary VLAN Trunk and PVLAN Trunk on One Interface . . . . .	1405
	Figure 26: Secondary VLAN Trunk and Non-Private VLAN Port on One Interface . . . . .	1406
	Figure 27: Traffic Ingressing on Promiscuous Access Port . . . . .	1407
	Figure 28: L2PT Example . . . . .	1421
<b>Chapter 16</b>	<b>Configuration . . . . .</b>	<b>1427</b>
	Figure 29: Network Topology for RSTP . . . . .	1429
	Figure 30: Network Topology for MSTP . . . . .	1442
	Figure 31: Reflective Relay Topology . . . . .	1464
	Figure 32: RVI with One Switch . . . . .	1482
	Figure 33: BPDU Protection Topology . . . . .	1496
	Figure 34: Network Topology for Root Protection . . . . .	1501
	Figure 35: Network Topology for Loop Protection . . . . .	1505
	Figure 36: PVLAN Topology Spanning Multiple Switches . . . . .	1517
	Figure 37: PVLAN Topology with Secondary VLAN Trunk Ports and Promiscuous Access Port . . . . .	1531
<b>Part 7</b>	<b>High Availability</b>	
<b>Chapter 19</b>	<b>Overview . . . . .</b>	<b>1769</b>
	Figure 38: Basic VRRP Topology . . . . .	1776
<b>Chapter 20</b>	<b>Configuration . . . . .</b>	<b>1777</b>
	Figure 39: VRRP Load-Sharing Configuration . . . . .	1788
<b>Part 8</b>	<b>Interfaces</b>	
<b>Chapter 23</b>	<b>Overview . . . . .</b>	<b>1911</b>
	Figure 40: Uplink Failure Detection Configuration on Switches . . . . .	1942
<b>Chapter 24</b>	<b>Configuration . . . . .</b>	<b>1945</b>
	Figure 41: Uplink Failure Detection Configuration on Switches . . . . .	1946
	Figure 42: Configuring a Multichassis LAG Between Switch A and Switch B . . .	1959
	Figure 43: Configuring a Multichassis LAG for Layer 3 Multicast Using VRRP . .	1974
	Figure 44: Configuring a Multichassis LAG Between Switch A and Switch B . . .	1997
	Figure 45: Configuring a Multichassis LAG Between Switch A and Switch B . . .	2012
<b>Part 9</b>	<b>Routing Options</b>	
<b>Chapter 28</b>	<b>Configuration . . . . .</b>	<b>2319</b>
	Figure 46: Customer Routes Connected to a Service Provider . . . . .	2329
	Figure 47: BFD Enabled on Qualified Next Hops . . . . .	2334
	Figure 48: Customer Routes Connected to a Service Provider . . . . .	2342
<b>Part 10</b>	<b>Border Gateway Protocol</b>	
<b>Chapter 31</b>	<b>Overview . . . . .</b>	<b>2637</b>
	Figure 49: ASs, EBGp, and IBGP . . . . .	2639
<b>Chapter 32</b>	<b>Configuration . . . . .</b>	<b>2643</b>



Figure 50: BGP Peering Session .....	2644
Figure 51: Typical Network with BGP Peer Sessions .....	2645
Figure 52: Typical Network with BGP Peer Sessions .....	2652
Figure 53: Internal and External BGP .....	2666
Figure 54: Typical Network with IBGP Sessions .....	2669
Figure 55: Typical Network with IBGP Sessions .....	2679
Figure 56: Typical Network with IBGP Sessions and Multiple Exit Points .....	2690
Figure 57: Default MED Example .....	2703
Figure 58: Typical Network with IBGP Sessions and Multiple Exit Points .....	2705
Figure 59: Typical Network with IBGP Sessions and Multiple Exit Points .....	2718
Figure 60: Topology for Delaying the MED Update .....	2732
Figure 61: Local AS Configuration .....	2743
Figure 62: Topology for Configuring the Local AS .....	2746
Figure 63: Topology for Configuring a Private Local AS .....	2756
Figure 64: Advertisement of Multiple Paths in BGP .....	2763
Figure 65: BGP Prefix-Based Outbound Route Filtering .....	2808
Figure 66: Typical Network with EBGP Multihop Sessions .....	2812
Figure 67: BGP Preference Value Topology .....	2823
Figure 68: Topology for Ignoring the AS-Path Length .....	2832
Figure 69: Topology for Removing a Private AS from the Advertised AS Path ..	2839
Figure 70: Typical Network with IBGP Sessions .....	2846
Figure 71: BGP Load Balancing .....	2859
Figure 72: Topology for Accepting a Remote Next Hop .....	2864
Figure 73: Advertisement of Multiple Paths in BGP .....	2876
Figure 74: Simple Route Reflector Topology (One Cluster) .....	2901
Figure 75: Basic Route Reflection (Multiple Clusters) .....	2901
Figure 76: Hierarchical Route Reflection (Clusters of Clusters) .....	2902
Figure 77: IBGP Network Using a Route Reflector .....	2904
Figure 78: BGP Confederations .....	2918
Figure 79: Typical Network Using BGP Confederations .....	2919
Figure 80: Authentication for BGP .....	2927
Figure 81: Typical Network with BGP Peer Sessions .....	2932
Figure 82: TCP Maximum Segment Size for BGP .....	2941
Figure 83: Topology for the EBGP Case .....	2948
Figure 84: Topology for the RR Case .....	2948
Figure 85: MBGP MVPN with BGP Route Flap Damping .....	2957

## Part 11

## Intermediate System to Intermediate System

### Chapter 34

### Overview ..... 3113

Figure 86: Install Default Route to Nearest Routing Device That Operates at Both Level 1 and Level 2 .....	3117
--	------

### Chapter 35

### Configuration ..... 3121

Figure 87: Simple IS-IS Topology .....	3122
Figure 88: IS-IS Multi-Level Topology .....	3127
Figure 89: Hitless Authentication Key Rollover for IS-IS .....	3136
Figure 90: IS-IS Route Redistribution Topology .....	3140
Figure 91: Configuring BFD for IS-IS .....	3148
Figure 92: IS-IS BFD Authentication Topology .....	3153



	Figure 93: Configuring IS-IS Multicast Topology . . . . .	3159
	Figure 94: IS-IS Checksum Topology . . . . .	3176
<b>Part 12</b>	<b>Open Shortest Path First</b>	
<b>Chapter 37</b>	<b>Overview . . . . .</b>	<b>3281</b>
	Figure 95: OSPF Three-Way Handshake . . . . .	3285
<b>Chapter 38</b>	<b>Configuration . . . . .</b>	<b>3293</b>
	Figure 96: Multiarea OSPF Topology . . . . .	3298
	Figure 97: Typical Single-Area OSPF Network Topology . . . . .	3300
	Figure 98: Typical Multiarea OSPF Network Topology . . . . .	3302
	Figure 99: OSPF AS Network with Stub Areas and NSSAs . . . . .	3305
	Figure 100: OSPF Network Topology with Stub Areas and NSSAs . . . . .	3308
	Figure 101: OSPF Network Topology with Stub Areas and NSSAs . . . . .	3312
	Figure 102: Summarizing Ranges of Routes in OSPF . . . . .	3337
	Figure 103: OSPF Metric Configuration . . . . .	3348
	Figure 104: Sample Topology Used for an OSPF Export Network Summary Policy . . . . .	3423
	Figure 105: Sample Topology Used for an OSPF Import Network Summary Policy . . . . .	3431
<b>Part 13</b>	<b>Routing Information Protocol</b>	
<b>Chapter 40</b>	<b>Overview . . . . .</b>	<b>3545</b>
	Figure 106: Distance-Vector Protocol . . . . .	3546
	Figure 107: Split Horizon Example . . . . .	3548
	Figure 108: Poison Reverse Example . . . . .	3549
	Figure 109: Limitations of Unidirectional Connectivity . . . . .	3550
<b>Chapter 41</b>	<b>Configuration . . . . .</b>	<b>3551</b>
	Figure 110: Sample RIP Network Topology . . . . .	3552
	Figure 111: RIP Authentication Network Topology . . . . .	3559
	Figure 112: RIP BFD Network Topology . . . . .	3567
	Figure 113: RIP BFD Authentication Network Topology . . . . .	3573
	Figure 114: RIP Import Policy Network Topology . . . . .	3579
	Figure 115: Controlling Traffic in a RIP Network with the Incoming Metric . . . . .	3585
	Figure 116: Controlling Traffic in a RIP Network with the Outgoing Metric . . . . .	3587
	Figure 117: RIP Incoming Metrics Network Topology . . . . .	3588
	Figure 118: Sending and Receiving RIPv1 and RIPv2 Packets Network Topology . . . . .	3593
	Figure 119: Redistributing Routes Between RIP Instances Network Topology . . . . .	3597
	Figure 120: RIP Timers Network Topology . . . . .	3603
	Figure 121: RIP Trace Operations Network Topology . . . . .	3610
<b>Part 14</b>	<b>Multicast</b>	
<b>Chapter 43</b>	<b>Overview . . . . .</b>	<b>3651</b>
	Figure 122: Rendezvous Point as Part of the RPT and SPT . . . . .	3657
	Figure 123: Building an RPT Between the RP and the Receiver . . . . .	3664
	Figure 124: PIM Register Message and PIM Join Message Exchanged . . . . .	3665



	Figure 125: Traffic Sent from the Source to the RP Router . . . . .	3666
	Figure 126: Traffic Sent from the RP Router Toward the Receiver . . . . .	3666
	Figure 127: Receiver DR Sends a PIM Join Message to the Source . . . . .	3668
	Figure 128: PIM Prune Message Is Sent from the Receiver's DR Toward the RP Router . . . . .	3669
	Figure 129: RP Router Receives PIM Prune Message . . . . .	3669
	Figure 130: RP Router Sends a PIM Prune Message to the Source DR . . . . .	3670
	Figure 131: Source's DR Stops Sending Duplicate Multicast Packets Toward the RP Router . . . . .	3670
	Figure 132: Receiver Announces Desire to Join Group G and Source S . . . . .	3682
	Figure 133: Router 3 (Last-Hop Router) Joins the Source Tree . . . . .	3683
	Figure 134: (S,G) State Is Built Between the Source and the Receiver . . . . .	3683
<b>Chapter 44</b>	<b>Configuration . . . . .</b>	<b>3687</b>
	Figure 135: Join Suppression . . . . .	3702
	Figure 136: PIM Assert Topology . . . . .	3727
	Figure 137: MVR Topology in Transparent Mode . . . . .	3765
	Figure 138: MVR Topology in Proxy Mode . . . . .	3766
	Figure 139: Source-Active Message Flooding . . . . .	3776
	Figure 140: Network on Which to Configure PIM SSM . . . . .	3784
	Figure 141: Receiver Sends Messages to Join Group G and Source S . . . . .	3789
	Figure 142: Router 3 (Last-Hop Router) Joins the Source Tree . . . . .	3789
	Figure 143: (S,G) State Is Built Between the Source and the Receiver . . . . .	3789
	Figure 144: Simple RPF Topology . . . . .	3789
<b>Part 15</b>	<b>Security</b>	
<b>Chapter 46</b>	<b>Overview . . . . .</b>	<b>4071</b>
	Figure 145: Evaluation of Terms Within a Firewall Filter . . . . .	4075
	Figure 146: Application of Firewall Filters to Control Packet Flow . . . . .	4076
	Figure 147: Flow of Tricolor Marking Policer Operation . . . . .	4097
	Figure 148: DHCP Server Connected Directly to Switch . . . . .	4113
	Figure 149: DHCP Server Connected Directly to Switch 2, with Switch 2 Connected to Switch 1 Through a Trusted Trunk Port . . . . .	4113
	Figure 150: Switch Is the DHCP Server . . . . .	4114
	Figure 151: Switch Acting as Relay Agent Through Router to DHCP Server . . . . .	4115
	Figure 152: Switch Relays DHCP Requests to Server . . . . .	4124
<b>Chapter 47</b>	<b>Configuration . . . . .</b>	<b>4127</b>
	Figure 153: Network Topology for Basic Port Security . . . . .	4138
	Figure 154: Network Topology for Basic Port Security . . . . .	4146
	Figure 155: Network Topology for Basic Port Security . . . . .	4149
	Figure 156: Network Topology for Basic Port Security . . . . .	4153
	Figure 157: Network Topology for Port Security Setup with Two Switches on the Same VLAN . . . . .	4156
	Figure 158: Network Topology for Basic Port Security . . . . .	4164
	Figure 159: Network Topology for Basic Port Security . . . . .	4168
	Figure 160: Network Topology for Configuring DHCP Option 82 on a Switch That Is on the Same VLAN as the DHCP Clients and the DHCP Server . . . . .	4172



<b>Part 16</b>	<b>Services</b>	
<b>Chapter 51</b>	<b>Configuration</b> . . . . .	<b>4319</b>
	Figure 161: Network Topology for Local Port Mirroring Example . . . . .	4320
<b>Part 17</b>	<b>Storage</b>	
<b>Chapter 54</b>	<b>Overview</b> . . . . .	<b>4379</b>
	Figure 162: ENode Components . . . . .	4393
	Figure 163: FCoE Transit Switch Connecting FCoE Devices to an FC Switch . . . . .	4397
	Figure 164: FCoE-FC Gateway Topology . . . . .	4399
	Figure 165: Traffic Switching Between FCoE Hosts Connected to the FC Network by an FCoE-FC Gateway . . . . .	4402
	Figure 166: FCoE-FC Gateway Fabric Login and FIP Login . . . . .	4413
	Figure 167: Sample Load-Balancing Topology . . . . .	4442
	Figure 168: FCoE Transit Switch Performs VN2VF_Port FIP Snooping . . . . .	4449
	Figure 169: Supported Topology for an MC-LAG on an FCoE Transit Switch . . . . .	4460
<b>Chapter 55</b>	<b>Configuration</b> . . . . .	<b>4495</b>
	Figure 170: Fibre Channel Interface Configuration Topology . . . . .	4498
	Figure 171: PFC for FCoE Traffic Configuration Components Block Diagram . . . . .	4511
	Figure 172: Supported Topology for an MC-LAG on an FCoE Transit Switch . . . . .	4519
	Figure 173: VN2VN_Port FIP Snooping (FCoE Hosts Connected to Same Transit Switch) Topology . . . . .	4553
	Figure 174: VN2VN_Port FIP Snooping (FCoE Hosts Connected to Different Transit Switches) Topology . . . . .	4558
	Figure 175: VN2VN_Port FIP Snooping (FCoE Hosts Indirectly Connected) Topology . . . . .	4565
<b>Part 18</b>	<b>Traffic Management</b>	
<b>Chapter 58</b>	<b>Overview</b> . . . . .	<b>4803</b>
	Figure 176: Packet Flow Across the Network . . . . .	4805
	Figure 177: Flow of Tricolor Marking Policer Operation . . . . .	4823
	Figure 178: CoS Classifier, Queues, and Scheduler . . . . .	4832
	Figure 179: Packet Flow Through Configurable CoS Components . . . . .	4832
	Figure 180: Hierarchical Scheduling Tiers . . . . .	4873
	Figure 181: Hierarchical Scheduling Packet Flow . . . . .	4875
	Figure 182: Allocating Guaranteed Bandwidth Using Hierarchical Scheduling . . . . .	4888
	Figure 183: Setting Maximum Bandwidth Using Hierarchical Scheduling . . . . .	4891
	Figure 184: Tail-Drop Profile Packet Drop . . . . .	4930
<b>Chapter 59</b>	<b>Configuration</b> . . . . .	<b>4961</b>
	Figure 185: Hierarchical Port Scheduling Components Block Diagram . . . . .	4966
	Figure 186: Hierarchical Port Scheduling Packet Flow Block Diagram . . . . .	4966
	Figure 187: PFC for FCoE Traffic Configuration Components Block Diagram . . . . .	4985
	Figure 188: Supported Topology for an MC-LAG on an FCoE Transit Switch . . . . .	4993
	Figure 189: Tail-Drop Profile Packet Drop Example . . . . .	5021
	Figure 190: Topology of the Two Lossless FCoE Priorities Example . . . . .	5066
	Figure 191: Topology of the Lossless FCoE and iSCSI Priorities Example . . . . .	5080



---

	Figure 192: Topology of the IEEE 802.1p Priority Remapping Example . . . . .	5096
<b>Part 19</b>	<b>Network Management and Monitoring</b>	
<b>Chapter 62</b>	<b>Overview . . . . .</b>	<b>5429</b>
	Figure 193: Commit Script Input and Output . . . . .	5437
	Figure 194: Standard Commit Model . . . . .	5439
	Figure 195: Commit Model with Commit Scripts Added . . . . .	5440
	Figure 196: Configuration Evaluation by Multiple Commit Scripts . . . . .	5442
	Figure 197: Op Script Input and Output . . . . .	5449
	Figure 198: SNMP Communication Flow . . . . .	5460
	Figure 199: Setting Thresholds . . . . .	5471
<b>Chapter 63</b>	<b>Configuration . . . . .</b>	<b>5509</b>
	Figure 200: sFlow Technology Monitoring System . . . . .	5515
	Figure 201: Inform Request and Response . . . . .	5550







# List of Tables

	<b>About the Documentation</b> . . . . .	<b>cix</b>
	Table 1: Notice Icons . . . . .	cxi
	Table 2: Text and Syntax Conventions . . . . .	cxi
<b>Part 3</b>	<b>Junos OS Basics</b>	
<b>Chapter 3</b>	<b>Overview</b> . . . . .	<b>15</b>
	Table 3: Access Control Features . . . . .	16
	Table 4: Administration Features . . . . .	16
	Table 5: CoS Features . . . . .	17
	Table 6: High Availability and Resiliency Features . . . . .	18
	Table 7: Interface Features . . . . .	19
	Table 8: IP Address Management Features . . . . .	19
	Table 9: Layer 2 Network Protocol Features . . . . .	20
	Table 10: Layer 3 Protocol Features . . . . .	22
	Table 11: Multicast Protocols Features . . . . .	23
	Table 12: Network Management and Monitoring Features . . . . .	24
	Table 13: Port Security Features . . . . .	25
	Table 14: QFabric System-Specific Features . . . . .	26
	Table 15: Security . . . . .	26
	Table 16: Storage and Fibre Channel Features . . . . .	27
	Table 17: System Management Features . . . . .	29
	Table 18: Configuration File Terms . . . . .	30
	Table 19: Legacy DHCP and Extended DHCP Server Hierarchy Levels . . . . .	41
	Table 20: Junos OS Processes . . . . .	44
	Table 21: Commonly Used Operational Mode Commands . . . . .	52
	Table 22: Summary of Configuration Mode Commands . . . . .	57
	Table 23: Configuration Mode Top-Level Statements . . . . .	59
	Table 24: Junos OS Feature Licenses and Model Numbers for QFX Series Devices . . . . .	63
	Table 25: Upgrade Licenses for Enhancing Port Capacity . . . . .	65
<b>Chapter 4</b>	<b>Installation</b> . . . . .	<b>75</b>
	Table 26: Junos OS and Jloader Software Compatibility Matrix for the QFX3500 Switch and QFX3500 Node Device . . . . .	95
	Table 27: Junos OS and Jloader Software Compatibility Matrix for the QFX3008-I Interconnect Device . . . . .	95
	Table 28: Junos OS and Jloader Software Compatibility Matrix for the QFX3600-I Interconnect Device and QFX3600 Node Device . . . . .	96
	Table 29: Uboot Software Release and Jloader Software Compatibility Matrix . . . . .	96



<b>Chapter 5</b>	<b>Configuration</b> . . . . .	<b>117</b>
	Table 30: DHCP Client Settings . . . . .	120
	Table 31: Methods for Configuring Junos OS . . . . .	144
<b>Chapter 6</b>	<b>Administration</b> . . . . .	<b>277</b>
	Table 32: Summary of System Process Information Output Fields . . . . .	277
	Table 33: Summary of Key System Properties Output Fields . . . . .	278
	Table 34: request system storage cleanup Output Fields . . . . .	379
	Table 35: show chassis alarms Output Fields . . . . .	412
	Table 36: show chassis led Output Fields . . . . .	419
	Table 37: show chassis ethernet-switch interconnect-device fpc Output Fields . . . . .	421
	Table 38: show chassis ethernet-switch interconnect-device fpc Output Fields . . . . .	448
	Table 39: show chassis environment Output Fields . . . . .	472
	Table 40: show chassis environment cb Output Fields . . . . .	519
	Table 41: show chassis environment fpc Output Fields . . . . .	538
	Table 42: show chassis environment pem Output Fields . . . . .	565
	Table 43: show chassis environment routing-engine Output Fields . . . . .	574
	Table 44: show chassis fan Output Fields . . . . .	578
	Table 45: show chassis firmware Output Fields . . . . .	590
	Table 46: show chassis fpc Output Fields . . . . .	605
	Table 47: Routing Engines Displaying DIMM Information . . . . .	630
	Table 48: show chassis hardware Output Fields . . . . .	633
	Table 49: show chassis lcd Output Fields . . . . .	737
	Table 50: show chassis led Output Fields . . . . .	747
	Table 51: show chassis location Output Fields . . . . .	758
	Table 52: show chassis mac-addresses Output Fields . . . . .	762
	Table 53: show chassis nonstop-upgrade node-group Output Fields . . . . .	767
	Table 54: show chassis pic Output Fields . . . . .	771
	Table 55: show chassis routing-engine Output Fields . . . . .	783
	Table 56: show chassis temperature-thresholds Output Fields . . . . .	803
	Table 57: show chassis zones Output Fields . . . . .	817
	Table 58: show cli Output Fields . . . . .	822
	Table 59: show cli authorization Output Fields . . . . .	824
	Table 60: show cli directory Output Fields . . . . .	827
	Table 61: show cli history Output Fields . . . . .	828
	Table 62: show interfaces diagnostics optics Output Fields . . . . .	830
	Table 63: show ntp associations Output Fields . . . . .	840
	Table 64: show ntp status Output Fields . . . . .	842
	Table 65: show subscribers Output Fields . . . . .	846
	Table 66: show system buffers Output Fields . . . . .	878
	Table 67: show system certificate Output Fields . . . . .	882
	Table 68: show system commit Output Fields . . . . .	884
	Table 69: show system connections Output Fields . . . . .	891
	Table 70: show system core-dumps Output Fields . . . . .	911
	Table 71: show system directory-usage Output Fields . . . . .	925
	Table 72: show system license Output Fields . . . . .	927
	Table 73: show system processes Output Fields . . . . .	938



	Table 74: show system resource-cleanup processes Output Fields . . . . .	962
	Table 75: show system services service-deployment Output Fields . . . . .	966
	Table 76: show system storage Output Fields . . . . .	1013
	Table 77: show system uptime Output Fields . . . . .	1019
	Table 78: show system users Output Fields . . . . .	1023
	Table 79: show system virtual-memory Output Fields . . . . .	1030
	Table 80: traceroute Output Fields . . . . .	1098
	Table 81: traceroute monitor Output Fields . . . . .	1101
<b>Part 4</b>	<b>Configuration and File Management</b>	
<b>Chapter 8</b>	<b>Overview . . . . .</b>	<b>1111</b>
	Table 82: Configuration File Terms . . . . .	1111
<b>Chapter 9</b>	<b>Configuration . . . . .</b>	<b>1115</b>
	Table 83: Options for the load Command . . . . .	1132
<b>Chapter 10</b>	<b>Administration . . . . .</b>	<b>1149</b>
	Table 84: show system commit Output Fields . . . . .	1169
<b>Part 5</b>	<b>User and Access Management</b>	
<b>Chapter 12</b>	<b>Overview . . . . .</b>	<b>1181</b>
	Table 85: Junos OS Processes . . . . .	1182
	Table 86: Juniper Networks Vendor-Specific RADIUS Attributes . . . . .	1188
	Table 87: Juniper Networks Vendor-Specific TACACS+ Attributes . . . . .	1190
	Table 88: Login Class Permission Flags . . . . .	1192
	Table 89: Order of Authentication Attempts . . . . .	1198
	Table 90: Predefined System Login Classes . . . . .	1203
	Table 91: Configuration Mode Hierarchies—Common Regular Expression Operators . . . . .	1205
	Table 92: Common Regular Expression Operators to Allow or Deny Operational Mode Commands . . . . .	1206
	Table 93: Special Requirements for Plain-Text Passwords . . . . .	1207
<b>Chapter 13</b>	<b>Configuration . . . . .</b>	<b>1211</b>
	Table 94: Match Conditions . . . . .	1244
	Table 95: Actions for VSAs . . . . .	1245
<b>Chapter 14</b>	<b>Administration . . . . .</b>	<b>1341</b>
	Table 96: show ethernet-switching interfaces Output Fields . . . . .	1347
	Table 97: show lldp Output Fields . . . . .	1352
	Table 98: show lldp local-information Output Fields . . . . .	1357
	Table 99: show lldp neighbors Output Fields . . . . .	1359
	Table 100: show lldp statistics Output Fields . . . . .	1364
	Table 101: show route instance Output Fields . . . . .	1366
	Table 102: show snmp statistics Output Fields . . . . .	1370
<b>Part 6</b>	<b>Ethernet Features</b>	
<b>Chapter 15</b>	<b>Overview . . . . .</b>	<b>1379</b>



**Chapter 16**

Table 103: Sample RVI Values . . . . .	1387
Table 104: Number of Supported RVIs by Platform . . . . .	1388
Table 105: PVLAN Requirements for 802.1Q Tags . . . . .	1393
Table 106: PVLAN Ports and Layer 2 Connectivity . . . . .	1394
Table 107: Protocol Destination MAC Addresses . . . . .	1422
<b>Configuration . . . . .</b>	<b>1427</b>
Table 108: Topology for Configuring RSTP on the QFX Series . . . . .	1429
Table 109: Topology for Configuring MSTP on the QFX Series . . . . .	1442
Table 110: Components of the Topology for Configuring Reflective Relay . . . . .	1464
Table 111: Components of the Basic Bridging Configuration Topology . . . . .	1467
Table 112: Components of the Multiple VLAN Topology . . . . .	1477
Table 113: Components of the Multiple VLAN Topology . . . . .	1482
Table 114: Components of the Topology for Connecting an Access Switch to a Distribution Switch . . . . .	1487
Table 115: Components of the Topology for Configuring BPDU Protection on the QFX Series . . . . .	1497
Table 116: Topology for Configuring Root Protection on the QFX Series . . . . .	1501
Table 117: Topology for Configuring Loop Protection on the QFX Series . . . . .	1505
Table 118: Components of the Topology for Configuring a PVLAN . . . . .	1510
Table 119: Components of Switch 1 in the Topology for Configuring a PVLAN Spanning Multiple Devices . . . . .	1518
Table 120: Components of Switch 2 in the Topology for Configuring a PVLAN Spanning Multiple Devices . . . . .	1518
Table 121: Components of Switch 3 in the Topology for Configuring a PVLAN Spanning Multiple Devices . . . . .	1519
Table 122: Components of the Topology for Configuring a Secondary VLAN Trunk on Switch 1 . . . . .	1531
Table 123: Components of the Topology for Configuring a Secondary VLAN Trunk on Switch 2 . . . . .	1532
Table 124: Components of the Topology for Setting Up Q-in-Q Tunneling . . . . .	1542

**Chapter 17**

<b>Administration . . . . .</b>	<b>1675</b>
Table 125: show ethernet-switching interfaces Output Fields . . . . .	1691
Table 126: show ethernet-switching layer2-protocol-tunneling interface Output Fields . . . . .	1695
Table 127: show ethernet-switching layer2-protocol-tunneling statistics Output Fields . . . . .	1698
Table 128: show ethernet-switching layer2-protocol-tunneling vlan Output Fields . . . . .	1700
Table 129: show ethernet-switching mac-learning-log Output Fields . . . . .	1702
Table 130: show ethernet-switching mac-notification Output Fields . . . . .	1704
Table 131: show ethernet-switching statistics aging Output Fields . . . . .	1705
Table 132: show ethernet-switching statistics mac-learning Output Fields . . . . .	1708
Table 133: show ethernet-switching table Output Fields . . . . .	1711
Table 134: show interfaces xe Output Fields . . . . .	1719
Table 135: show spanning-tree bridge Output Fields . . . . .	1736
Table 136: show spanning-tree Interface Output Fields . . . . .	1741
Table 137: show spanning-tree mstp configuration Output Fields . . . . .	1747
Table 138: show spanning-tree statistics Output Fields . . . . .	1749



	Table 139: show vlans Output Fields . . . . .	1753
<b>Part 7</b>	<b>High Availability</b>	
<b>Chapter 20</b>	<b>Configuration . . . . .</b>	<b>1777</b>
	Table 140: Settings for VRRP Load-Sharing Example . . . . .	1788
	Table 141: Interface State and Priority Cost Usage . . . . .	1799
<b>Chapter 21</b>	<b>Administration . . . . .</b>	<b>1839</b>
	Table 142: show bgp neighbor Output Fields . . . . .	1843
	Table 143: show ospf overview Output Fields . . . . .	1859
	Table 144: show chassis nonstop-upgrade node-group Output Fields . . . . .	1895
	Table 145: show vrrp Output Fields . . . . .	1896
<b>Part 8</b>	<b>Interfaces</b>	
<b>Chapter 23</b>	<b>Overview . . . . .</b>	<b>1911</b>
	Table 146: Network Interface Types and Purposes . . . . .	1911
	Table 147: Special Interface Types and Purposes . . . . .	1912
	Table 148: Valid Port Ranges on QFX3500 Devices . . . . .	1918
	Table 149: Valid Port Ranges on QFX3600 Standalone Switches . . . . .	1922
	Table 150: Valid Port Ranges on QFX3600 Node Devices . . . . .	1925
	Table 151: ICCP Failure Scenarios . . . . .	1933
<b>Chapter 24</b>	<b>Configuration . . . . .</b>	<b>1945</b>
	Table 152: Settings for Uplink Failure Protection Example . . . . .	1947
	Table 153: Components of the Topology for Configuring a LAG Between a QFX3500 Switch and Aggregation Switch . . . . .	1951
	Table 154: Components of the Topology for Configuring a Multichassis LAG Between Two Switches . . . . .	1959
	Table 155: Components of the Topology for Configuring a Multichassis LAG for Layer 3 Multicast Using VRRP . . . . .	1974
	Table 156: Components of the Topology for Configuring a Multichassis LAG Between Two Switches . . . . .	1997
	Table 157: Components of the Topology for Configuring a Multichassis LAG Between Two Switches . . . . .	2013
	Table 158: Protocol Families and Supported Interface Types . . . . .	2064
<b>Chapter 25</b>	<b>Administration . . . . .</b>	<b>2121</b>
	Table 159: Summary of System Process Information Output Fields . . . . .	2121
	Table 160: Summary of Key System Properties Output Fields . . . . .	2122
	Table 161: Output Control Keys for the monitor interface Command . . . . .	2128
	Table 162: Output Control Keys for the monitor interface traffic Command . . . . .	2129
	Table 163: monitor interface Output Fields . . . . .	2130
	Table 164: show iccp . . . . .	2137
	Table 165: show interfaces diagnostics optics Output Fields . . . . .	2139
	Table 166: show interfaces fabric Output Fields . . . . .	2147
	Table 167: show interfaces ge Output Fields . . . . .	2168
	Table 168: show interfaces mc-ae Output Fields . . . . .	2184
	Table 169: show interfaces statistics fabric Output Fields . . . . .	2187
	Table 170: Layer 2 Overhead, Transmitted Packets/Bytes . . . . .	2206



Table 171: show interfaces queue Output Fields . . . . .	2209
Table 172: Byte Count by PIC Type . . . . .	2212
Table 173: show interfaces queue fabric Output Fields . . . . .	2244
Table 174: show interfaces xe Output Fields . . . . .	2267
Table 175: show interfaces xe Output Fields . . . . .	2285
Table 176: show lacp interfaces Output Fields . . . . .	2303
Table 177: show lacp statistics interfaces Output Fields . . . . .	2307
Table 178: show uplink-failure-detection Output Fields . . . . .	2309

## Part 9

## Routing Options

### Chapter 29

### Administration . . . . . 2447

Table 179: Filtering Route Messages . . . . .	2447
Table 180: Summary of Key Routing Information Output Fields . . . . .	2448
Table 181: show as-path Output Fields . . . . .	2451
Table 182: show as-path domain Output Fields . . . . .	2455
Table 183: show as-path summary Output Fields . . . . .	2457
Table 184: show ipv6 neighbors Output Fields . . . . .	2459
Table 185: show ipv6 router-advertisement Output Fields . . . . .	2461
Table 186: show route Output Fields . . . . .	2465
Table 187: show route damping Output Fields . . . . .	2488
Table 188: show route detail Output Fields . . . . .	2494
Table 189: Next-hop Types Output Field Values . . . . .	2498
Table 190: State Output Field Values . . . . .	2500
Table 191: Communities Output Field Values . . . . .	2502
Table 192: show route export Output Fields . . . . .	2511
Table 193: show route extensive Output Fields . . . . .	2513
Table 194: show route flow validation Output Fields . . . . .	2528
Table 195: show route forwarding-table Output Fields . . . . .	2532
Table 196: show route instance Output Fields . . . . .	2550
Table 197: show route martians Output Fields . . . . .	2561
Table 198: show route receive-protocol Output Fields . . . . .	2589
Table 199: show route resolution Output Fields . . . . .	2599
Table 200: show route summary Output Fields . . . . .	2615
Table 201: show route terse Output Fields . . . . .	2630

## Part 10

## Border Gateway Protocol

### Chapter 32

### Configuration . . . . . 2643

Table 202: MED Options for Routing Table Path Selection . . . . .	2703
Table 203: Default Route Preference Values . . . . .	2820
Table 204: Damping Parameters . . . . .	2953

### Chapter 33

### Administration . . . . . 3071

Table 205: show bgp group Output Fields . . . . .	3078
Table 206: show bgp neighbor Output Fields . . . . .	3085
Table 207: show bgp summary Output Fields . . . . .	3098
Table 208: show policy damping Output Fields . . . . .	3103
Table 209: show route damping Output Fields . . . . .	3105



<b>Part 11</b>	<b>Intermediate System to Intermediate System</b>	
<b>Chapter 35</b>	<b>Configuration</b>	<b>3121</b>
	Table 210: IPv4 Statements	3157
	Table 211: IPv6 Statements	3157
	Table 212: Default Metric Values for Routes Exported into IS-IS	3213
<b>Chapter 36</b>	<b>Administration</b>	<b>3241</b>
	Table 213: show isis adjacency Output Fields	3250
	Table 214: show isis authentication Output Fields	3254
	Table 215: show isis database Output Fields	3257
	Table 216: show isis hostname Output Fields	3263
	Table 217: show isis interface Output Fields	3265
	Table 218: show isis overview Output Fields	3269
	Table 219: show isis route Output Fields	3272
	Table 220: show isis statistics Output Fields	3277
<b>Part 12</b>	<b>Open Shortest Path First</b>	
<b>Chapter 37</b>	<b>Overview</b>	<b>3281</b>
	Table 221: Default Route Preference Values for OSPF	3284
<b>Chapter 39</b>	<b>Administration</b>	<b>3481</b>
	Table 222: show (ospf   ospf3) backup coverage Output Fields	3492
	Table 223: show (ospf   ospf3) backup neighbor Output Fields	3495
	Table 224: show ospf context-identifier Output Fields	3498
	Table 225: show ospf database Output Fields	3500
	Table 226: show (ospf   ospf3) interface Output Fields	3509
	Table 227: show (ospf   ospf3) io-statistics Output Fields	3514
	Table 228: show (ospf   ospf3) log Output Fields	3516
	Table 229: show (ospf   ospf3) neighbor Output Fields	3521
	Table 230: show ospf overview Output Fields	3527
	Table 231: show (ospf   ospf3) route Output Fields	3533
	Table 232: show (ospf   ospf3) statistics Output Fields	3538
<b>Part 13</b>	<b>Routing Information Protocol</b>	
<b>Chapter 41</b>	<b>Configuration</b>	<b>3551</b>
	Table 233: Configuring Simple RIP Authentication	3563
	Table 234: Configuring MD5 RIP Authentication	3564
<b>Chapter 42</b>	<b>Administration</b>	<b>3639</b>
	Table 235: show rip general-statistics Output Fields	3642
	Table 236: show rip neighbor Output Fields	3644
	Table 237: show rip statistics Output Fields	3647
<b>Part 14</b>	<b>Multicast</b>	
<b>Chapter 43</b>	<b>Overview</b>	<b>3651</b>
	Table 238: ASM and SSM Terminology	3681
<b>Chapter 44</b>	<b>Configuration</b>	<b>3687</b>



**Chapter 45**

Table 239: PIM Join Filter Match Conditions . . . . .	3722
Table 240: IGMP Event Messages . . . . .	3753
Table 241: Components of the IGMP Snooping Topology . . . . .	3760
Table 242: Source-Active Message Flooding Explanation . . . . .	3775

**Administration . . . . . 3925**

Table 243: Summary of IGMP Snooping Output Fields . . . . .	3925
Table 244: mtrace Output Fields . . . . .	3947
Table 245: mtrace from-source Output Fields . . . . .	3951
Table 246: mtrace monitor Output Fields . . . . .	3953
Table 247: mtrace to-gateway Output Fields . . . . .	3956
Table 248: show igmp group Output Fields . . . . .	3958
Table 249: show igmp group Output Fields . . . . .	3960
Table 250: show igmp interface Output Fields . . . . .	3964
Table 251: show igmp statistics Output Fields . . . . .	3968
Table 252: show igmp-snooping membership Output Fields . . . . .	3971
Table 253: show igmp-snooping route Output Fields . . . . .	3974
Table 254: show igmp-snooping statistics Output Fields . . . . .	3976
Table 255: show igmp-snooping vlans Output Fields . . . . .	3978
Table 256: show msdp Output Fields . . . . .	3980
Table 257: show msdp source Output Fields . . . . .	3983
Table 258: show msdp source-active Output Fields . . . . .	3985
Table 259: show msdp statistics Output Fields . . . . .	3987
Table 260: show multicast flow-map Output Fields . . . . .	3991
Table 261: show multicast interface Output Fields . . . . .	3993
Table 262: show multicast minfo Output Fields . . . . .	3995
Table 263: show multicast next-hops Output Fields . . . . .	3998
Table 264: show multicast pim-to-igmp-proxy Output Fields . . . . .	4000
Table 265: show multicast pim-to-mld-proxy Output Fields . . . . .	4002
Table 266: show multicast route Output Fields . . . . .	4005
Table 267: show multicast rpf Output Fields . . . . .	4011
Table 268: show multicast scope Output Fields . . . . .	4014
Table 269: show multicast sessions Output Fields . . . . .	4016
Table 270: show multicast usage Output Fields . . . . .	4019
Table 271: show pim bootstrap Output Fields . . . . .	4022
Table 272: show pim interfaces Output Fields . . . . .	4024
Table 273: show pim join Output Fields . . . . .	4028
Table 274: show pim neighbors Output Fields . . . . .	4037
Table 275: show pim rps Output Fields . . . . .	4042
Table 276: show pim source Output Fields . . . . .	4049
Table 277: show pim statistics Output Fields . . . . .	4051

**Part 15****Chapter 46****Security****Overview . . . . . 4071**

Table 278: Actions for Firewall Filters . . . . .	4080
Table 279: Supported Match Conditions for Firewall Filters . . . . .	4081
Table 280: Actions for Firewall Filters . . . . .	4088
Table 281: Action Modifiers for Firewall Filters . . . . .	4088
Table 282: Policer Actions . . . . .	4098



	Table 283: Color-Blind Mode TCM Color-to-PLP Mapping . . . . .	4101
	Table 284: Color-Aware Mode Single-Rate PLP Mapping . . . . .	4101
	Table 285: Color-Blind Mode TCM Color-to-PLP Mapping . . . . .	4103
	Table 286: Color-Aware Mode Two-Rate PLP Mapping . . . . .	4103
<b>Chapter 47</b>	<b>Configuration . . . . .</b>	<b>4127</b>
	Table 287: Servers Connected to Switch . . . . .	4134
	Table 288: Components of the Port Security Topology . . . . .	4138
	Table 289: Components of the Port Security Topology . . . . .	4146
	Table 290: Components of the Port Security Topology . . . . .	4150
	Table 291: Components of the Port Security Topology . . . . .	4153
	Table 292: Components of Port Security Setup on Switch 1 with a DHCP Server Connected to Switch 2 . . . . .	4156
	Table 293: Components of the Port Security Topology . . . . .	4164
	Table 294: Components of the Port Security Topology . . . . .	4168
	Table 295: Unicast Forwarding Classes . . . . .	4181
<b>Chapter 48</b>	<b>Administration . . . . .</b>	<b>4275</b>
	Table 296: show arp inspection statistics Output Fields . . . . .	4292
	Table 297: show dhcp snooping binding Output Fields . . . . .	4293
	Table 298: show firewall Output Fields . . . . .	4295
	Table 299: show firewall policer Output Fields . . . . .	4299
	Table 300: show interfaces filters Output Fields . . . . .	4301
<b>Part 16</b>	<b>Services</b>	
<b>Chapter 50</b>	<b>Overview . . . . .</b>	<b>4313</b>
	Table 301: Port Mirroring Terms and Definitions . . . . .	4314
<b>Chapter 52</b>	<b>Administration . . . . .</b>	<b>4371</b>
	Table 302: show analyzer Output Fields . . . . .	4372
<b>Part 17</b>	<b>Storage</b>	
<b>Chapter 54</b>	<b>Overview . . . . .</b>	<b>4379</b>
	Table 303: Fibre Channel Protocol Layers . . . . .	4381
	Table 304: Load-Balancing Algorithm Comparison . . . . .	4435
	Table 305: Load-Balancing Triggers and Actions . . . . .	4438
	Table 306: FC Interface Session-Based Load-Balancing Characteristics for Unequal Loads . . . . .	4440
	Table 307: FC Interface Session-Based Load-Balancing Characteristics for Equal Loads . . . . .	4441
	Table 308: Summary of Differences Between IEEE DCBX and DCBX Version 1.01 . . . . .	4465
	Table 309: Asymmetric Ethernet PAUSE Flow Control Configuration . . . . .	4478
	Table 310: Flow Control State Advertised to the Connected Peer (Autonegotiation) . . . . .	4479
	Table 311: Asymmetric Ethernet PAUSE Behavior on Local and Peer Interfaces . . . . .	4480
	Table 312: Default PFC Priority to Queue and Forwarding Class Mapping . . . . .	4481
	Table 313: Fibre Channel Terms . . . . .	4484



<b>Chapter 55</b>	<b>Configuration</b>	<b>4495</b>
	Table 314: Components of the Fibre Channel Interface Configuration Topology	4497
	Table 315: Components of the PFC for FCoE Traffic Configuration Topology	4510
	Table 316: Components of the CoS for FCoE Traffic Across an MC-LAG Configuration Topology	4519
	Table 317: Default IEEE 802.1 Classifiers for Trunk Ports and Tagged-Access Ports (Default Trusted Classifier)	4542
	Table 318: Default IEEE 802.1 Unicast Classifiers for Access Ports (Default Untrusted Classifier)	4542
	Table 319: Components of DCBX Application Protocol Exchange Configuration Topology	4543
	Table 320: Components of the VN2VN_Port FIP Snooping Configuration Topology (FCoE Hosts Directly Connected to the Same FCoE Transit Switch)	4552
	Table 321: Components of the VN2VN_Port FIP Snooping Configuration Topology (FCoE Hosts Directly Connected to Different FCoE Transit Switches)	4557
	Table 322: Components of the VN2VN_Port FIP Snooping Configuration Topology (FCoE Hosts Indirectly Connected Across an Aggregation Layer FCoE Transit Switch)	4564
<b>Chapter 56</b>	<b>Administration</b>	<b>4665</b>
	Table 323: Summary of Key FC Interface Load-Balancing Output Fields	4666
	Table 324: show fibre-channel proxy fabric-state Output Fields	4667
	Table 325: request fibre-channel proxy load-rebalance dry-run Output Fields	4682
	Table 326: show dcbx output fields	4693
	Table 327: show dcbx neighbors Output Fields	4694
	Table 328: show fibre-channel fabric Output Fields	4718
	Table 329: show fibre-channel fc2 sessions Output Fields	4720
	Table 330: show fibre-channel fc2 statistics Output Fields	4722
	Table 331: show fibre-channel fip Output Fields	4724
	Table 332: show fibre-channel fip enode Output Fields	4729
	Table 333: show fibre-channel fip fabric Output Fields	4733
	Table 334: show fibre-channel fip fcf Output Fields	4736
	Table 335: show fibre-channel fip interface Output Fields	4739
	Table 336: show fibre-channel fip statistics Output Fields	4742
	Table 337: show fibre-channel flogi fport Output Fields	4746
	Table 338: show fibre-channel flogi nport Output Fields	4747
	Table 339: show fibre-channel flogi statistics Output Fields	4749
	Table 340: show fibre-channel interfaces Output Fields	4751
	Table 341: show fibre-channel next-hops Output Fields	4754
	Table 342: show fibre-channel routes Output Fields	4755
	Table 343: show fibre-channel proxy fabric-state Output Fields	4757
	Table 344: show fibre-channel proxy login-table Output Fields	4760
	Table 345: show fibre-channel proxy np-port Output Fields	4764
	Table 346: show fibre-channel proxy statistics Output Fields	4767
	Table 347: show fip snooping Output Fields	4770
	Table 348: show fip snooping enode Output Fields	4775
	Table 349: show fip snooping fcf Output Fields	4778
	Table 350: show fip snooping interface Output Fields	4780



## Part 18

## Chapter 58

## Traffic Management

**Overview ..... 4803**

Table 351: show fip snooping statistics Output Fields . . . . .	4783
Table 352: show fip snooping vlan Output Fields . . . . .	4786
Table 353: show fip vlan-discovery Output Fields . . . . .	4790
Table 354: show route forwarding-table family fibre-channel Output Fields . .	4793
Table 355: Junos OS Release 11.1 and 11.2 Default Forwarding Classes and Queue Mapping . . . . .	4812
Table 356: Junos OS Release 11.3 Default Forwarding Classes and Queue Mapping . . . . .	4813
Table 357: Junos OS Release 11.1 and 11.2 Default IEEE 802.1 Unicast Classifiers . . . . .	4814
Table 358: Junos OS Release 11.3 Default IEEE 802.1 Unicast Classifiers . . . . .	4814
Table 359: Junos OS Release 11.1 and 11.2 Default IEEE 802.1 Multidestination Classifiers . . . . .	4815
Table 360: Junos OS Release 11.3 Default IEEE 802.1 Multidestination Classifiers . . . . .	4815
Table 361: Junos OS Release 11.1 and 11.2 Default Schedulers . . . . .	4816
Table 362: Default Schedulers . . . . .	4817
Table 363: Policer Actions . . . . .	4824
Table 364: CoS Mappings—Inputs and Outputs . . . . .	4833
Table 365: Default Forwarding Classes and Queue Mapping . . . . .	4834
Table 366: Default IEEE 802.1 Code-Point Aliases . . . . .	4835
Table 367: Default DSCP and DCSP IPv6 Code-Point Aliases . . . . .	4836
Table 368: Default IEEE 802.1 Unicast Classifiers for Ports in Trunk Mode or Tagged Access Mode (Trusted Classifier) . . . . .	4837
Table 369: Default IEEE 802.1 Unicast Classifiers for Ports in Access Mode (Untrusted Classifier) . . . . .	4838
Table 370: Default IEEE 802.1 Multidestination Classifiers . . . . .	4838
Table 371: Default DSCP IP and IPv6 Unicast Classifiers . . . . .	4839
Table 372: Default Drop Profile . . . . .	4840
Table 373: Default Schedulers . . . . .	4840
Table 374: Default Scheduler Maps . . . . .	4840
Table 375: Default Ingress Shared Buffer Configuration . . . . .	4841
Table 376: Default Egress Shared Buffer Configuration . . . . .	4841
Table 377: Routing Engine Protocol Default Queue Mapping . . . . .	4843
Table 378: Default IEEE 802.1 Code-Point Aliases . . . . .	4844
Table 379: Default DSCP and DSCP IPv6 Code-Point Aliases . . . . .	4845
Table 380: Default BA Classification . . . . .	4848
Table 381: Default IEEE 802.1p Code Point to PFC Priority, Output Queue, and Forwarding Class Mapping . . . . .	4849
Table 382: Supported Classifiers and Rewrite Rules . . . . .	4852
Table 383: Ethernet Interface Support for Classifier and Rewrite Rule Configuration . . . . .	4854
Table 384: Default Forwarding Classes for Unicast Packets . . . . .	4861
Table 385: Default Forwarding Classes for Multicast Packets . . . . .	4862



Table 386: Default IEEE 802.1 Unicast Classifiers for Ports in Trunk Mode or Tagged-Access Mode (Trusted Classifier) . . . . .	4867
Table 387: Default IEEE 802.1 Unicast Classifiers for Ports in Access Mode (Untrusted Classifier) . . . . .	4867
Table 388: Default IEEE 802.1 Multidestination Classifiers . . . . .	4868
Table 389: Default DSCP IP and IPv6 Unicast Classifiers . . . . .	4868
Table 390: Default Scheduler Configuration . . . . .	4869
Table 391: Hierarchical Scheduling Tiers . . . . .	4872
Table 392: Output Queue Scheduler Components . . . . .	4877
Table 393: Other Scheduling Components . . . . .	4877
Table 394: Default Schedulers . . . . .	4878
Table 395: Priority Group Scheduler Components . . . . .	4883
Table 396: Other Scheduling Components . . . . .	4884
Table 397: Mapping of Default Unicast Forwarding Class to Queue, IEEE 802.1p Priority, and Drop Attribute . . . . .	4898
Table 398: FCoE and No-Loss Forwarding Class Configuration in Junos OS Release 12.3 . . . . .	4900
Table 399: Results of Lossless Priority Configuration . . . . .	4907
Table 400: Default Dedicated Buffer Allocation to Egress Queues (Based on Default Scheduler) . . . . .	4919
Table 401: Example 1: Egress Queue Dedicated Buffer Allocation . . . . .	4920
Table 402: Example 2: Egress Queue Dedicated Buffer Allocation with Another Remainder Queue . . . . .	4921
Table 403: Default Ingress Shared Buffer Configuration . . . . .	4924
Table 404: Default Egress Shared Buffer Configuration . . . . .	4924
Table 405: Recommended Ingress Shared Buffer Configuration for Networks with Mostly Best-Effort Unicast Traffic . . . . .	4924
Table 406: Recommended Egress Shared Buffer Configuration for Networks with Mostly Best-Effort Unicast Traffic . . . . .	4924
Table 407: Recommended Ingress Shared Buffer Configuration for Networks with Mostly Best-Effort Multicast Traffic . . . . .	4925
Table 408: Recommended Egress Shared Buffer Configuration for Networks with Mostly Best-Effort Multicast Traffic . . . . .	4925
Table 409: Recommended Ingress Shared Buffer Configuration for Networks with Mostly Lossless Traffic . . . . .	4925
Table 410: Recommended Egress Shared Buffer Configuration for Networks with Mostly Lossless Traffic . . . . .	4925
Table 411: Asymmetric Ethernet PAUSE Flow Control Configuration . . . . .	4940
Table 412: Flow Control State Advertised to the Connected Peer (Autonegotiation) . . . . .	4941
Table 413: Asymmetric Ethernet PAUSE Behavior on Local and Peer Interfaces . . . . .	4942
Table 414: Default PFC Priority to Queue and Forwarding Class Mapping . . . . .	4943
Table 415: Summary of Differences Between IEEE DCBX and DCBX Version 1.01 . . . . .	4948
<b>Chapter 59 Configuration . . . . .</b>	<b>4961</b>
Table 416: Components of the Hierarchical Port Scheduling (ETS) Configuration Topology . . . . .	4964



Table 417: Components of the PFC for FCoE Traffic Configuration Topology . .	4985
Table 418: Components of the CoS for FCoE Traffic Across an MC-LAG Configuration Topology . . . . .	4993
Table 419: ba-ucast-classifier Loss Priority Assignments . . . . .	5015
Table 420: BA-mcast-classifier Loss Priority Assignments . . . . .	5018
Table 421: Forwarding-Class-to-Queue Example Configuration . . . . .	5026
Table 422: Components of the Forwarding Class Sets Configuration Example . . . . .	5028
Table 423: Components of the Queue Scheduler Configuration Example . . .	5032
Table 424: Components of the Queue Scheduler Priority Configuration Example . . . . .	5036
Table 425: Components of the Minimum Guaranteed Output Bandwidth Configuration Example . . . . .	5042
Table 426: Components of the Maximum Output Bandwidth Configuration Example . . . . .	5046
Table 427: Components of the Configuration Topology for FCoE Traffic That Does Not Use Priority 3 . . . . .	5050
Table 428: Components of the Two Lossless FCoE Priorities on an Interface Configuration Topology . . . . .	5057
Table 429: Components of the Two Lossless FCoE Priorities Configuration Topology . . . . .	5066
Table 430: Components of the Lossless FCoE and iSCSI Priorities Configuration Topology . . . . .	5080
Table 431: Components of the IEEE 802.1p Priority Remapping Configuration Topology . . . . .	5096
Table 432: Components of the Recommended Shared Buffer Configuration for Best-Effort Unicast Network Topologies . . . . .	5105
Table 433: Components of the Recommended Shared Buffer Configuration for Multicast Network Topologies . . . . .	5111
Table 434: Components of the Recommended Shared Buffer Configuration for Lossless Network Topologies . . . . .	5116
Table 435: Default IEEE 802.1 Classifiers for Trunk Ports and Tagged-Access Ports (Default Trusted Classifier) . . . . .	5122
Table 436: Default IEEE 802.1 Unicast Classifiers for Access Ports (Default Untrusted Classifier) . . . . .	5122
Table 437: Components of DCBX Application Protocol Exchange Configuration Topology . . . . .	5123
Table 438: Default Egress Shared Buffer Partitioning . . . . .	5172
Table 439: Default Ingress Shared Buffer Partitioning . . . . .	5174
Table 440: Default Output Queue Buffer Sizes . . . . .	5177
<b>Chapter 60 Administration . . . . .</b>	<b>5265</b>
Table 441: Summary of Key CoS Classifier Output Fields . . . . .	5265
Table 442: Summary of Key CoS Forwarding Class Output Fields . . . . .	5267
Table 443: Summary of Key CoS Interfaces Output Fields . . . . .	5268
Table 444: Summary of Key CoS Rewrite Rule Output Fields . . . . .	5269
Table 445: Summary of Key CoS Scheduler Maps Output Fields . . . . .	5269
Table 446: Summary of Key CoS Value Alias Output Fields . . . . .	5271
Table 447: show class-of-service Output Fields . . . . .	5272



	Table 448: show class-of-service classifier Output Fields . . . . .	5277
	Table 449: show class-of-service code-point-aliases Output Fields . . . . .	5279
	Table 450: show class-of-service congestion-notification Output Fields . . . . .	5281
	Table 451: show class-of-service drop-profile Output Fields . . . . .	5283
	Table 452: show class-of-service forwarding-class Output Fields . . . . .	5286
	Table 453: show class-of-service forwarding-class-set Output Fields . . . . .	5288
	Table 454: show class-of-service forwarding-table classifier Output Fields . .	5293
	Table 455: show class-of-service forwarding-table classifier mapping Output Fields . . . . .	5295
	Table 456: show class-of-service forwarding-table drop-profile Output Fields . . . . .	5296
	Table 457: show class-of-service forwarding-table rewrite-rule Output Fields . . . . .	5298
	Table 458: show class-of-service forwarding-table rewrite-rule mapping Output Fields . . . . .	5300
	Table 459: show class-of-service forwarding-table scheduler-map Output Fields . . . . .	5301
	Table 460: show class-of-service interface Output Fields . . . . .	5304
	Table 461: show class-of-service multi-destination Output Fields . . . . .	5329
	Table 462: show class-of-service rewrite-rule Output Fields . . . . .	5330
	Table 463: show class-of-service scheduler-map Output Fields . . . . .	5332
	Table 464: show class-of-service shared-buffer Output Fields . . . . .	5334
	Table 465: show class-of-service traffic-control-profile Output Fields . . . . .	5336
	Table 466: show dcbx output fields . . . . .	5340
	Table 467: show dcbx neighbors Output Fields . . . . .	5341
	Table 468: Layer 2 Overhead, Transmitted Packets/Bytes . . . . .	5366
	Table 469: show interfaces queue Output Fields . . . . .	5369
	Table 470: Byte Count by PIC Type . . . . .	5372
<b>Chapter 61</b>	<b>Troubleshooting . . . . .</b>	<b>5417</b>
	Table 471: Components of the Rate Shaping Troubleshooting Example . . . . .	5425
<b>Part 19</b>	<b>Network Management and Monitoring</b>	
<b>Chapter 62</b>	<b>Overview . . . . .</b>	<b>5429</b>
	Table 472: Device and Network Management Features on the QFX Series . . .	5429
	Table 473: Differences Between Persistent and Transient Changes . . . . .	5444
	Table 474: Device and Network Management Tasks in Junos Space . . . . .	5454
	Table 475: RMON Event Table . . . . .	5472
	Table 476: RMON Alarm Table . . . . .	5472
	Table 477: jnxRmon Alarm Table . . . . .	5473
	Table 478: RMON History Control Table . . . . .	5473
	Table 479: Monitored Object Instances . . . . .	5475
	Table 480: Standard MIBs Supported on QFX3500 and QFX3600 Switches . .	5476
	Table 481: Standard MIBs Supported on QFabric Systems . . . . .	5480
	Table 482: Juniper Networks Enterprise-Specific MIBs Supported on QFX3500 and QFX3600 Switches . . . . .	5484
	Table 483: Juniper Networks Enterprise-Specific MIBs Supported on QFabric Systems . . . . .	5488
	Table 484: Standard SNMP Version 1 Traps Supported . . . . .	5493



	Table 485: Standard SNMPv2 Traps Supported on QFX3500 and QFX3600 Switches . . . . .	5495
	Table 486: Standard SNMPv2 Traps Supported on QFabric Systems . . . . .	5497
	Table 487: Enterprise-Specific SNMPv1 Traps Supported on QFX3500 and QFX3600 Switches . . . . .	5498
	Table 488: Enterprise-Specific SNMPv2 Traps Supported on QFX3500 and QFX3600 Switches . . . . .	5501
	Table 489: Enterprise-Specific SNMPv2 Traps Supported on QFabric Systems . . . . .	5503
<b>Chapter 63</b>	<b>Configuration . . . . .</b>	<b>5509</b>
	Table 490: Minimum Configuration Statements for System Logging . . . . .	5551
	Table 491: Fields in Structured-Data Messages . . . . .	5560
	Table 492: Facility and Severity Codes in the priority-code Field . . . . .	5562
	Table 493: Fields in Standard-Format Messages . . . . .	5563
	Table 494: Junos OS System Logging Facilities . . . . .	5566
	Table 495: System Log Message Severity Levels . . . . .	5566
	Table 496: Default Facilities for Messages Directed to a Remote Destination . .	5567
	Table 497: Facilities for the facility-override Statement . . . . .	5568
	Table 498: Regular Expression Operators for the match Statement . . . . .	5571
<b>Chapter 64</b>	<b>Administration . . . . .</b>	<b>5723</b>
	Table 499: Output Control Keys for the monitor interface Command . . . . .	5727
	Table 500: SNMP Tracing Flags . . . . .	5734
	Table 501: Commit Script Configuration and Operational Mode Commands . .	5737
	Table 502: Match Conditions for the monitor traffic Command . . . . .	5745
	Table 503: Logical Operators for the monitor traffic Command . . . . .	5746
	Table 504: Arithmetic and Relational Operators for the monitor traffic Command . . . . .	5748
	Table 505: ping fabric multicast-flow Output Fields . . . . .	5757
	Table 506: ping fabric unicast-flow Output Fields . . . . .	5760
	Table 507: show oam fabric flow-specification Output Fields . . . . .	5770
	Table 508: show oam fabric interfaces Output Fields . . . . .	5773
	Table 509: show sflow Output Fields . . . . .	5778
	Table 510: show sflow collector Output Fields . . . . .	5780
	Table 511: show sflow interface Output Fields . . . . .	5781
	Table 512: show snmp health-monitor Output Fields . . . . .	5783
	Table 513: show snmp inform-statistics Output Fields . . . . .	5788
	Table 514: show snmp mib Output Fields . . . . .	5791
	Table 515: show snmp rmon Output Fields . . . . .	5794
	Table 516: show snmp statistics Output Fields . . . . .	5799
	Table 517: show snmp v3 Output Fields . . . . .	5804
	Table 518: traceroute fabric unicast-flow Output Fields . . . . .	5807
<b>Chapter 65</b>	<b>Troubleshooting . . . . .</b>	<b>5809</b>
	Table 519: Troubleshooting Resources on the QFX Series . . . . .	5809
	Table 520: Troubleshooting on the QFX Series . . . . .	5811
<b>Part 20</b>	<b>Troubleshooting</b>	
<b>Chapter 66</b>	<b>Overview . . . . .</b>	<b>5821</b>



	Table 521: Troubleshooting Resources on the QFX Series . . . . .	5821
	Table 522: Troubleshooting on the QFX Series . . . . .	5823
	Table 523: Alarm Terms and Definitions . . . . .	5826
	Table 524: QFX3500 Chassis Alarm Messages . . . . .	5827
<b>Chapter 67</b>	<b>Administration . . . . .</b>	<b>5831</b>
	Table 525: SNMP Tracing Flags . . . . .	5835
	Table 526: Output Control Keys for the monitor interface Command . . . . .	5841
<b>Chapter 68</b>	<b>Troubleshooting . . . . .</b>	<b>5843</b>
	Table 527: Components of the Rate Shaping Troubleshooting Example . . . . .	5885



# About the Documentation

- Documentation and Release Notes on page cix
- Supported Platforms on page cix
- Using the Examples in This Manual on page cix
- Documentation Conventions on page cxi
- Documentation Feedback on page cxiii
- Requesting Technical Support on page cxiii

## Documentation and Release Notes

---

To obtain the most current version of all Juniper Networks® technical documentation, see the product documentation page on the Juniper Networks website at <http://www.juniper.net/techpubs/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <http://www.juniper.net/books>.

## Supported Platforms

---

For the features described in this document, the following platforms are supported:

- [QFX Series](#)

## Using the Examples in This Manual

---

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.



If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

## Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xml;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

## Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {
  file ex-script-snippet.xml; }
```

2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:



```
[edit]
user@host# edit system scripts
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]
user@host# load merge relative /var/tmp/ex-script-snippet.conf
load complete
```

For more information about the **load** command, see the CLI User Guide.

## Documentation Conventions

Table 1 on page cxi defines notice icons used in this guide.

Table 1: Notice Icons


Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.

Table 2 on page cxi defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
<b>Bold text like this</b>	Represents text that you type.	To enter configuration mode, type the <b>configure</b> command:  user@host> <b>configure</b>
Fixed-width text like this	Represents output that appears on the terminal screen.	user@host> <b>show chassis alarms</b>  No alarms currently active



Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
<i>Italic text like this</i>	<ul style="list-style-type: none"> <li>Introduces or emphasizes important new terms.</li> <li>Identifies book names.</li> <li>Identifies RFC and Internet draft titles.</li> </ul>	<ul style="list-style-type: none"> <li>A policy <i>term</i> is a named structure that defines match conditions and actions.</li> <li><i>Junos OS System Basics Configuration Guide</i></li> <li>RFC 1997, <i>BGP Communities Attribute</i></li> </ul>
<i>Italic text like this</i>	Represents variables (options for which you substitute a value) in commands or configuration statements.	Configure the machine's domain name:  [edit] root@# <b>set system domain-name</b> <i>domain-name</i>
<b>Text like this</b>	Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.	<ul style="list-style-type: none"> <li>To configure a stub area, include the <b>stub</b> statement at the [edit protocols ospf area area-id] hierarchy level.</li> <li>The console port is labeled <b>CONSOLE</b>.</li> </ul>
< > (angle brackets)	Enclose optional keywords or variables.	<b>stub &lt;default-metric metric&gt;;</b>
(pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	<b>broadcast   multicast</b>  <i>(string1   string2   string3)</i>
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	<b>rsvp { # Required for dynamic MPLS only</b>
[ ] (square brackets)	Enclose a variable for which you can substitute one or more values.	<b>community name members [ community-ids ]</b>
Indentation and braces ( { } )	Identify a level in the configuration hierarchy.	[edit] routing-options { static { route default { nexthop <i>address</i> ; retain; } } }
;(semicolon)	Identifies a leaf statement at a configuration hierarchy level.	
<b>J-Web GUI Conventions</b>		
<b>Bold text like this</b>	Represents J-Web graphical user interface (GUI) items you click or select.	<ul style="list-style-type: none"> <li>In the Logical Interfaces box, select <b>All Interfaces</b>.</li> <li>To cancel the configuration, click <b>Cancel</b>.</li> </ul>
> (bold right angle bracket)	Separates levels in a hierarchy of J-Web selections.	In the configuration editor hierarchy, select <b>Protocols&gt;Ospf</b> .



## Documentation Feedback

---

We encourage you to provide feedback, comments, and suggestions so that we can improve the documentation. You can send your comments to [techpubs-comments@juniper.net](mailto:techpubs-comments@juniper.net), or fill out the documentation feedback form at <https://www.juniper.net/cgi-bin/docbugreport/>. If you are using e-mail, be sure to include the following information with your comments:

- Document or topic name
- URL or page number
- Software release version (if applicable)

## Requesting Technical Support

---

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or JNASC support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <http://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <http://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

## Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <http://www.juniper.net/customers/support/>
- Search for known bugs: <http://www2.juniper.net/kb/>
- Find product documentation: <http://www.juniper.net/techpubs/>
- Find solutions and answer questions using our Knowledge Base: <http://kb.juniper.net/>
- Download the latest versions of software and review release notes: <http://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications: <https://www.juniper.net/alerts/>



- Join and participate in the Juniper Networks Community Forum:  
<http://www.juniper.net/company/communities/>
- Open a case online in the CSC Case Management tool: <http://www.juniper.net/cm/>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://tools.juniper.net/SerialNumberEntitlementSearch/>

## Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at <http://www.juniper.net/cm/>.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <http://www.juniper.net/support/requesting-support.html>.



## PART 1

# QFX3500 Switch Overview

- [QFX3500 Switch Overview on page 3](#)







## CHAPTER 1

# QFX3500 Switch Overview

- [QFX3500 Device Overview on page 3](#)

## QFX3500 Device Overview

---

The Juniper Networks QFX3500 device is a high-speed, multipurpose switch especially designed for next-generation data centers. Forty-eight 10-Gbps access ports in the device use small form-factor pluggable plus (SFP+) transceivers and operate by default as 10-Gigabit Ethernet interfaces. Optionally, you can choose to configure up to 12 of the ports as 2-Gbps, 4-Gbps, or 8-Gbps Fibre Channel (FC) interfaces, and up to 36 of the ports as 1-Gigabit Ethernet interfaces. When used as a standalone switch, four 40-Gbps uplink ports in the device use quad small form-factor pluggable plus (QSFP+) to four SFP+ copper breakout cables to support an additional 15 10-Gigabit Ethernet interfaces.

QFX3500 devices can function as a Fibre Channel over Ethernet (FCoE)-FC gateway or as an FCoE transit switch. FCoE is a method of supporting converged FC and Ethernet traffic on a data center bridging (DCB) network by encapsulating unmodified FC frames in Ethernet to transport the FC frames over the physical Ethernet network.

In a QFabric system, a QFX3500 device functions as a Node device, connected to a QFabric system through 40-Gbps uplink ports to a Juniper Networks QFX3008-I or QFX3600-I Interconnect device. Together, the QFX3500 Node devices and QFX3008-I or QFX3600-I Interconnect devices form a multistage, nonblocking switch fabric that provides a high-performance, low-latency, unified interconnect solution for next-generation data centers.

The QFX3500 Node devices and Interconnect devices are connected to Juniper Networks QFX3100 Director devices in an out-of-band management network through Juniper Networks EX4200 Ethernet Switches. The QFX3100 Director devices present the QFabric system devices as a single network entity, which enables simplified management of your data center using the Junos OS command-line interface (CLI).

- [Software on page 3](#)
- [Hardware on page 4](#)

## Software

QFX Series devices use the Junos operating system (OS), which provides Layer 2 and Layer 3 switching, routing, and security services. Junos OS is installed on the QFX3500



device's 8-gigabyte (GB) internal flash drive. The same Junos OS code base that runs on QFX3500 devices also runs on all Juniper Networks EX Series switches, and J Series, M Series, MX Series, and T Series routers.

For more information about which features are supported on QFX Series devices, see [“QFX Series Software Features Overview” on page 15](#).


When the QFX3500 device is operating as a standalone switch, you manage the switch using the Junos OS command-line interface (CLI), accessible through the console and out-of-band management ports on the device.

When a QFX Series device operates as part of a QFabric system, all the devices in the data center fabric are managed through the Administrator software installed on the QFX3100 Director devices. Each device in a QFabric system is interconnected in a single control plane and management network, using the redundant management ports on each device.


## Hardware

The compact QFX3500 device is 1 rack unit (1 U) in size and designed to fit in industry-standard 19-inch rack-mount enclosures. See [Figure 1 on page 4](#) and [Figure 2 on page 4](#) and Chassis Physical Specifications for a QFX3500 Chassis.

**Figure 1: QFX3500 Device Front**

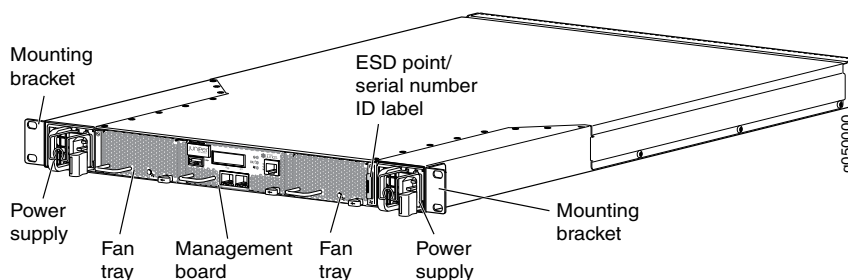

**Figure 2: QFX3500 Device Rear**

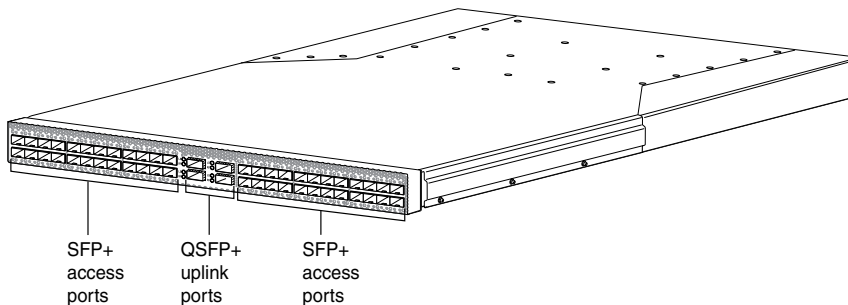

The front panel of the QFX3500 chassis has an LCD panel that displays the device hostname and the number of active alarms. See [Front Panel of a QFX3500 Device](#). The rear panel has 48 10-Gbps access ports and 4 40-Gbps uplink ports. See [Rear Panel of a QFX3500 Device](#).



## SFP+ Access Ports

The QFX3500 device has 48 access ports (0 through 47) that support small form-factor pluggable plus (SFP+) and small form-factor pluggable (SFP) transceivers, as well as SFP+ direct attach copper cables, also known as Twinax cables. See Interface Support for the QFX3500 Device.

- Up to 48 of the access ports can be used for SFP+ transceivers or SFP+ direct attach copper cables. You can use 10-Gigabit Ethernet SFP+ transceivers and SFP+ direct attach copper cables in any access port. You can use 2-Gbps, 4-Gbps, or 8-Gbps Fibre Channel SFP+ transceivers in ports 0 through 5 and ports 42 through 47.



**NOTE:** If you use Fibre Channel SFP+ transceivers in ports 0 through 5 or ports 42 through 47, you must configure the entire block of ports as Fibre Channel ports. For example, if you use a Fibre Channel SFP+ transceiver in any of the ports 0 through 5, then ports 0 through 5 must be configured as Fibre Channel ports. If you use a Fibre Channel SFP+ transceiver in any of the ports 42 through 47, then ports 42 through 47 must be configured as Fibre Channel ports. You then cannot use 10-Gigabit Ethernet SFP+ transceivers in these ports.


- Up to 36 of the access ports can be used for SFP transceivers. Gigabit Ethernet SFP transceivers can be used in ports 6 through 41.



**CAUTION:** Do not place a copper transceiver in an access port directly above or below another copper transceiver. Internal damage to the access ports and device can occur. Because of this limitation, a maximum of 18 copper transceivers can be installed in ports 6 through 41. We recommend using only the top row of access ports for copper transceivers.

Figure 3 on page 5 shows the location of the SFP+ access ports, including the ports that can be used with Fibre Channel SFP+ transceivers and Gigabit Ethernet SFP transceivers.

**Figure 3: SFP+ Access Port Locations**

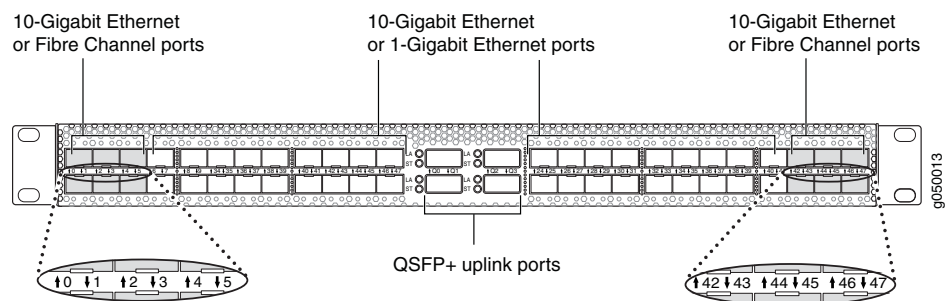



## QSFP+ Uplink Ports

The QFX3500 device has four uplink ports (**Q0** through **Q3**) that support up to four QSFP+ transceivers, as well as QSFP+ DAC or DAC breakout cables. See Interface Support for the QFX3500 Device.


When the QFX3500 device is used as part of a QFabric system, these uplink ports are used to connect the QFX3500 Node device to QFX3008-I or QFX3600-I Interconnect devices. See Connecting a QFX3500 Node Device to a QFX3008-I Interconnect Device or Connecting a QFX3500 Node Device to a QFX3600-I Interconnect Device.

When the QFX3500 device is used as a standalone switch, these uplink ports are configured by default as 15 10-Gigabit Ethernet interfaces. Port **Q0** supports only three 10-Gigabit Ethernet interfaces. Ports **Q1** through **Q3** support four 10-Gigabit Ethernet interfaces. Optionally, you can configure one or more of the ports as 40-Gigabit Ethernet interfaces. [Figure 4 on page 6](#) shows the location of the QSFP+ uplink ports and the default 10-Gigabit Ethernet interface numbering.



**NOTE:** The QSFP+ uplink ports are not supported in Junos OS Release 11.1. The QSFP+ uplink ports are supported in Junos OS Release 11.2 and later. To configure the ports as 40-Gigabit Ethernet interfaces, you must be using Junos OS Release 12.2X50-D20 or later.

Figure 4: QSFP+ Uplink Port Locations

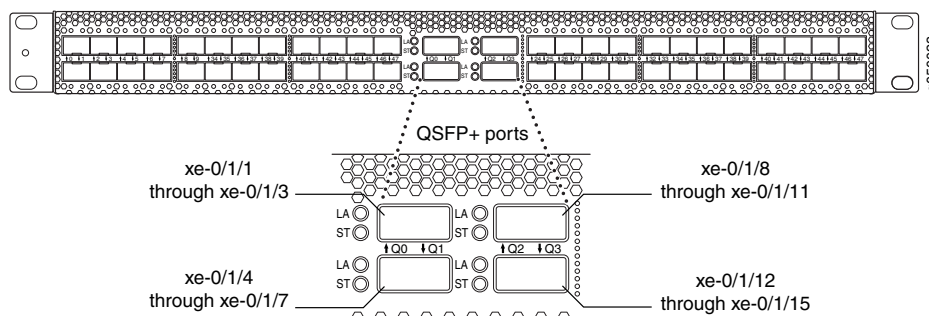

### Related Documentation

- Field-Replaceable Units in a QFX3500 Device
- Site Preparation Checklist for a QFX3500 Device
- Access Port and Uplink Port LEDs on a QFX3500 Device
- Installing and Removing QFX3500 Device Hardware Components



## PART 2

# QFX3600 Switch Overview

- [QFX3600 Switch Overview on page 9](#)







## CHAPTER 2

# QFX3600 Switch Overview

- [QFX3600 Device Overview on page 9](#)

## QFX3600 Device Overview

---

The Juniper Networks QFX3600 device is a high-speed, multipurpose switch especially designed for next-generation data centers. Sixteen 40-Gbps ports in the device use quad small form-factor pluggable plus (QSFP+) transceivers. The small form-factor and front facing ports in the switch make it suitable for deployment in high-density server racks and container-based data center deployments.

In a QFabric system, a QFX3600 device functions as a Node device, connected to a QFabric system through 40-Gbps uplink ports to a Juniper Networks QFX3008-I or QFX3600-I Interconnect device. Together, the QFX3600 Node devices and QFX3008-I or QFX3600-I Interconnect devices form a multistage, nonblocking switch fabric that provides a high-performance, low-latency, unified interconnect solution for next-generation data centers.

The QFX3600 Node devices and QFX3008-I or QFX3600-I Interconnect devices are connected to Juniper Networks QFX3100 Director devices in a control plane and management network. The QFX3100 Director device presents the QFabric system devices as a single network entity, allowing for simplified management of your data center using the Junos OS command-line interface (CLI).

- [Software on page 9](#)
- [Hardware on page 10](#)

## Software

QFX Series devices use the Junos operating system (OS), which provides Layer 2 and Layer 3 switching, routing, and security services. Junos OS is installed on the QFX3600 device's 8-gigabyte (GB) internal flash drive. The same Junos OS code base that runs on QFX Series devices also runs on all Juniper Networks EX Series, J Series, M Series, MX Series, and T Series devices.

For more information about which features are supported on QFX Series devices, see [“QFX Series Software Features Overview” on page 15](#).




When the QFX3600 device is operating as a standalone switch, you manage the switch using the Junos OS command-line interface (CLI), accessible through the console and out-of-band management ports on the device.

When a QFX Series device operates as part of a QFabric system, all the devices in the data center fabric are managed through the Administrator software installed on the QFX3100 Director devices. Each device in a QFabric system is interconnected in a single control plane and management network, using the redundant management ports on each device.

## Hardware


The compact QFX3600 chassis is 1 rack unit (1 U) in size and designed to fit in industry-standard 19-inch rack-mount enclosures, as well as high-density server racks and container-based data center deployments. See [Figure 5 on page 10](#) and [Figure 6 on page 10](#) and Chassis Physical Specifications for QFX3600 and QFX3600-I Devices.

Figure 5: QFX3600 Chassis Front

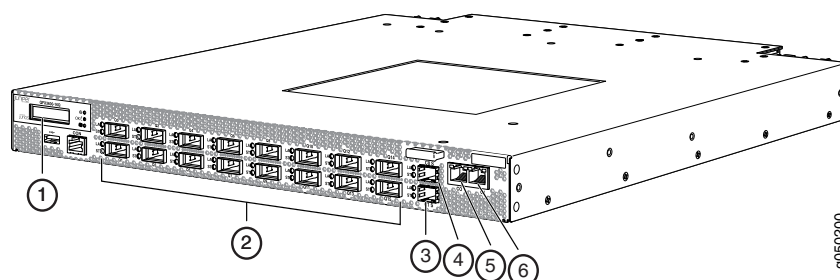

1—LCD panel	4—COS 1-Gbps SFP management port
2—QSFP+ ports	5—C0 1000BASE-T RJ-45 management port
3—CIS 1-Gbps SFP management port	6—C1 1000BASE-T RJ-45 management port

Figure 6: QFX3600 Chassis Rear

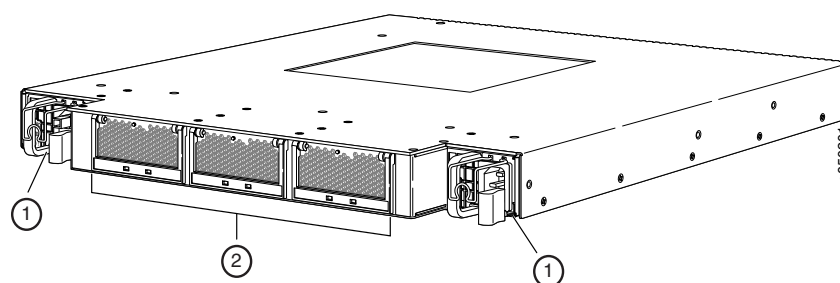

1—Power supplies	2—Fan trays
------------------	-------------

The front panel of the QFX3600 chassis has an LCD panel that displays the device hostname and the number of active alarms. It also has sixteen 40-Gbps ports labeled **Q0** through **Q15** that support quad small form-factor pluggable plus (QSFP+) transceivers. See [Front Panel of a QFX3600 Device](#).

If you are using the QFX3600 device as a Node device in a QFabric system, by default, four ports (labeled **Q0** through **Q3**) are configured for uplink connections between your



QFX3600 Node device and your Interconnect device, and twelve ports (labeled **Q4** through **Q15**) support 48 10-Gigabit Ethernet or 12 40-Gigabit Ethernet interfaces for connections to either endpoint systems (such as servers and storage devices) or external networks. Optionally, you can choose to configure the first eight ports (labeled **Q0** through **Q7**) for uplink connections between your QFX3600 Node device and your Interconnect device and ports **Q2** through **Q15** for 10-Gigabit Ethernet or 40-Gigabit Ethernet connections to either endpoint systems or external networks. See [Configuring the Port Type on QFX3600 Node Devices and Interface Support for the QFX3600 Device](#).

If you are using the QFX3600 device as a standalone switch, by default, all 16 QSFP+ ports (**Q0** through **Q15**) are configured as 40-Gigabit Ethernet (*xle*) ports. Optionally, you can choose to configure each port to operate as 10-Gigabit Ethernet (*xe*) ports to support up to 63 10-Gigabit Ethernet ports. See [“Configuring the Port Type on QFX3600 Standalone Switches” on page 204](#)<sup>1</sup> and [Interface Support for the QFX3600 Device](#).

The rear panel of the QFX3600 chassis has two redundant power supplies and three redundant fan trays that are field-replaceable and hot-swappable. See [Rear Panel of QFX3600 and QFX3600-I Devices](#).

**Related  
Documentation**

- [Field-Replaceable Units for QFX3600 and QFX3600-I Devices](#)
- [Site Preparation Checklist for a QFX3600 or QFX3600-I Device](#)
- [Installing and Removing QFX3600 or QFX3600-I Device Hardware Components](#)







## PART 3

# Junos OS Basics

- [Overview on page 15](#)
- [Installation on page 75](#)
- [Configuration on page 117](#)
- [Administration on page 277](#)
- [Troubleshooting on page 1103](#)







## CHAPTER 3

# Overview

- [Software Overview on page 15](#)
- [User Interfaces on page 45](#)
- [Licenses on page 62](#)

## Software Overview

---

- [QFX Series Software Features Overview on page 15](#)
- [Configuration File Terms on page 29](#)
- [Format for Specifying IP Addresses, Network Masks, and Prefixes in Junos OS Configuration Statements on page 30](#)
- [Junos OS Commit Model for Router or Switch Configuration on page 31](#)
- [Junos OS Package Names on page 32](#)
- [NTP Time Server and Time Services Overview on page 33](#)
- [NTP Time Server and Time Services Overview \(QFabric System\) on page 34](#)
- [Overview of CoS Upgrade Requirements \(Junos OS Release 11.1 or 11.2 to a Later Release\) on page 34](#)
- [Understanding Autoinstallation of Configuration Files on page 36](#)
- [Understanding Zero Touch Provisioning on page 38](#)
- [Understanding DHCP Services for Switches on page 39](#)
- [Understanding Software Infrastructure and Processes on page 43](#)

## QFX Series Software Features Overview

The following tables list the Juniper Networks QFX Series software features and the Juniper Networks Junos operating system (Junos OS) release in which they were introduced:

- [Table 3 on page 16](#)—Access Control Features
- [Table 4 on page 16](#)—Administration Features
- [Table 5 on page 17](#)—Class-of-Service (CoS) Features
- [Table 6 on page 18](#)—High Availability and Resiliency Features
- [Table 7 on page 19](#)—Interface Features



- [Table 8 on page 19](#)—IP Address Management Features
- [Table 9 on page 20](#)—Layer 2 Network Protocol Features
- [Table 10 on page 22](#)—Layer 3 Protocol Features
- [Table 11 on page 23](#)—Multicast Protocol Features
- [Table 12 on page 24](#)—Network Management and Monitoring Features
- [Table 13 on page 25](#)—Port Security Features
- [Table 14 on page 26](#)—QFabric System-Specific Features
- [Table 15 on page 26](#)—Security
- [Table 16 on page 27](#)—Storage and Fibre Channel Features
- [Table 17 on page 29](#)—System Management Features



**NOTE:** The command-line interface (CLI) on the QFX Series might display configuration statements that are not supported. However, configuring an unsupported statement on a device has no effect on the operation of the device. See [“QFX Series CLI Hierarchy” on page 161](#) to see which statements are supported on the QFX Series.

**Table 3: Access Control Features**

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
MAC RADIUS authentication	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
TACACS+	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
QFabric system component-level access and login classes	Not applicable	Not applicable	Junos OS 11.3X30.9	Junos OS 12.2X50-D10

**Table 4: Administration Features**

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
System logging (syslog) over IPv4	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Licensing	Junos OS 12.2X50-D10	Junos OS 12.2X50-D20	Junos OS 12.2X50-D10	Junos OS 12.2X50-D10



Table 5: CoS Features

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Class of service (CoS)—Class-based queuing with prioritization	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
CoS—Multidestination	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
CoS support on link aggregation groups (LAGs)	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Enhanced transmission selection (ETS)	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Interface-specific CoS rewrite rules	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Port shaping and queue shaping	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Priority-based flow control (PFC)	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Priority-based flow control enhancements	Junos OS 12.3X50-D10	Junos OS 12.3X50-D10	Not supported	Not supported
Re-marking of bridged packets	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Priority remapping	Junos OS 12.3X50-D10	Not supported	Not supported	Not supported
Weighted random early detection (WRED) tail-drop profiles	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
802.3X Ethernet PAUSE autonegotiation enhancements	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported
Layer 3 ingress packet classification and egress rewrite rule class-of-service features	Junos OS 12.2X50-D10	Junos OS 12.2X50-D20	Not supported	Not supported
Software buffer configurability	Junos OS 12.3X50-D10	Junos OS 12.3X50-D10	Not supported	Not supported



Table 6: High Availability and Resiliency Features

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Graceful protocol restart for BGP	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Junos OS 12.2X50-D10	Junos OS 12.2X50-D10
Graceful protocol restart for OSPF	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Junos OS 12.2X50-D10	Junos OS 12.2X50-D10
Link aggregation groups (LAGs)	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Support for 32 members in a link aggregation group (LAG)	Junos OS 12.2X50-D10	Junos OS 12.2X50-D20	Junos OS 12.2X50-D10	Junos OS 12.2X50-D10
Multichassis link aggregation	Junos OS 12.2X50-D10	Not supported	Not supported	Not supported
Virtual Router Redundancy Protocol (VRRP)	Junos OS 11.3R1	Junos OS 12.2X50-D20	Not supported	Not supported
Graceful restart for FIP snooping to recover gracefully from Ethernet protocol restarts and crashes	Junos OS 12.2X50-D10	Junos OS 12.2X50-D20	Not supported	Not supported
Nonstop software upgrade (NSSU)	Not supported	Not supported	Junos OS 12.2X50-D10	Junos OS 12.2X50-D10



Table 6: High Availability and Resiliency Features (*continued*)

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Layer 3 unicast and multicast support for multichassis link aggregation	Junos OS 12.3X50-D10	Junos OS 12.3X50-D10	Not supported	Not supported

Table 7: Interface Features

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Interface ranges	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
VLAN-tagged Layer 3 logical interfaces	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported

Table 8: IP Address Management Features

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Static addresses	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
IPv4 support for telnet	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6. For information about telnet support on this system, see <a href="#">“Understanding Telnet on the QFabric System”</a> on page 5433.	Junos OS 12.2X50-D10. For information about telnet support on this system, see <a href="#">“Understanding Telnet on the QFabric System”</a> on page 5433.
IPv6 support for neighbor discovery, SSH, Telnet, ping, traceroute, static routing, firewall filters, RADIUS, NTP, SNMP, on network Node group	Not supported	Not supported	Junos OS 12.2X50-D10	Junos OS 12.2X50-D10
IPv6 support for neighbor discovery, SSH, Telnet, ping, traceroute, static routing, firewall filters, SNMP on management interfaces	Junos OS 12.2X50-D20	Not supported	Not applicable	Not applicable



Table 8: IP Address Management Features (*continued*)

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
IPv6 support for neighbor discovery, router advertisements, stateless autoconfiguration, link aggregation, SSH, Telnet, ping, traceroute, path MTU, static routing, dynamic routing (BGPv6, IS-ISv6, OSPFv3, RIPv6), graceful restart, BFD, virtual routers, firewall filters, SNMP, CoS, VRRPv3, Radius, TACACS+, AAA, NTP, syslog, on network interfaces	Junos OS 12.3X50-D10	Junos OS 12.3X50-D10		

Table 9: Layer 2 Network Protocol Features

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
802.1Q VLAN tagging	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
BPDU protection for spanning-tree protocols	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 12.2X50-D10 (network Node group only)	Junos OS 12.2X50-D10 (network Node group only)
Jumbo frames on routed VLAN interfaces (RVIs)	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Link Layer Discovery Protocol (LLDP)	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Loop protection for spanning-tree protocols	Junos OS 11.1R1	Junos OS 12.2X50-D20	Not supported	Not supported



Table 9: Layer 2 Network Protocol Features (*continued*)

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Root protection for spanning-tree protocols	Junos OS 11.1R1	Junos OS 12.2X50-D20	Not supported	Not supported
Spanning tree:	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 12.2X50-D10 (network Node group only)	Junos OS 12.2X50-D10 (network Node group only)
<ul style="list-style-type: none"> <li>Spanning Tree Protocol (STP)</li> <li>Rapid Spanning Tree Protocol (RSTP)</li> <li>Multiple Spanning Tree Protocol (MSTP)</li> <li>VLAN Spanning Tree Protocol (VSTP)</li> <li>RSTP and VSTP concurrent configuration</li> </ul>				
VLAN ranges	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Private VLANs	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported
Secondary VLAN trunk ports and promiscuous access ports for private VLANs	Junos OS 12.2X50-D10	Junos OS 12.2X50-D20	Not supported	Not supported
Q-in-Q tunneling and VLAN translation	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported
Layer 2 Tunneling Protocol	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported



Table 9: Layer 2 Network Protocol Features (*continued*)

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Reflective relay	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Junos OS 12.2X50-D10	Junos OS 12.2X50-D10
Proxy ARP	Junos OS 12.2X50-D10	Junos OS 12.2X50-D20	Not supported	Not supported

Table 10: Layer 3 Protocol Features

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Bidirectional Forwarding Detection (BFD)	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported
Border Gateway Protocol (BGP)	Junos OS 11.3R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D20
A separate software license is required for BGP. See <a href="#">“Software Features That Require Licenses on the QFX Series”</a> on page 63.				
BGPv6	Junos OS 12.3X50-D10	Junos OS 12.3X50-D10	Not supported	Not supported
Intermediate System-to-Intermediate System (IS-IS)	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported
A separate software license is required for IS-IS. See <a href="#">“Software Features That Require Licenses on the QFX Series”</a> on page 63.				
IS-ISv6	Junos OS 12.3X50-D10	Junos OS 12.3X50-D10	Not supported	Not supported
Open Shortest Path First (OSPF) v2	Junos OS 11.3R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D20
OSPFv3	Junos OS 12.3X50-D10	Junos OS 12.3X50-D10	Not supported	Not supported
Per-packet load balancing (ECMP)	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D20
Routing Information Protocol versions 1 and 2 (RIPv1 and RIPv2)	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported



Table 10: Layer 3 Protocol Features (*continued*)

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
RIPv6	Junos OS 12.3X50-D10	Junos OS 12.3X50-D10	Not supported	Not supported
Routed VLAN interfaces (RVIs)	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Routing options	Junos OS 11.3R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Static routes	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Virtual router routing instances for unicast protocols	Junos OS 11.3R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Virtual router routing instances for multicast protocols	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported

Table 11: Multicast Protocols Features

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
IGMPv1 and v2 snooping	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
IGMP snooping with routed VLAN interfaces (RVIs)	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Protocol Independent Multicast sparse mode (PIM SM)	Junos OS 11.3R1	Junos OS 12.2X50-D20	Not supported	Not supported
Protocol Independent Multicast source-specific multicast (PIM SSM)	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported
Bidirectional Forwarding Detection (BFD) for PIM	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported
IGMPv3	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported



Table 11: Multicast Protocols Features (*continued*)

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
IGMPv3 snooping	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported
Anycast RP	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported
Multicast Source Discovery Protocol (MSDP)	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported
Multicast VLAN registration	Junos OS 12.3X50-D10	Junos OS 12.3X50-D10	Not supported	Not supported
IGMP Querier	Junos OS 12.3X50-D10	Junos OS 12.3X50-D10	Not supported	Not supported

Table 12: Network Management and Monitoring Features

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Junos Space	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.9	Junos OS 12.2X50-D10
Local port mirroring	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Remote port mirroring	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Junos OS 12.2X50-D10	Junos OS 12.2X50-D10
Remote port mirroring to IP address (GRE encapsulation)	Junos OS 12.3X50-D10	Junos OS 12.3X50-D10	Not supported	Not supported
RMON	Junos OS 11.1R1	Junos OS 12.2X50-D20	Not supported	Not supported
sFlow monitoring technology	Junos OS 11.3R1	Junos OS 12.2X50-D20	Junos OS 12.2X50-D10	Junos OS 12.2X50-D10
Simple Network Management Protocol version 1 (SNMPv1) and SNMPv2	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Simple Network Management Protocol version 3 (SNMPv3)	Junos OS 11.1R1	Junos OS 12.2X50-D20	Not supported	Not supported



Table 12: Network Management and Monitoring Features (*continued*)

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Juniper enterprise-specific SNMP Utility MIB	Junos OS 12.2X50-D10	Junos OS 12.2X50-D20	Junos OS 12.2X50-D10	Junos OS 12.2X50-D10
Uplink failure detection	Junos OS 11.3R4	Junos OS 12.2X50-D20	Not supported	Not supported
Junos OS automation script support	Junos OS 12.2X50-D10	Junos OS 12.2X50-D20	Junos OS 12.2X50-D10	Junos OS 12.2X50-D10
Debugging and diagnostics support	Not applicable	Not applicable	Junos OS 12.2X50-D10	Junos OS 12.2X50-D10
Internal fabric OAM monitoring	Not applicable	Not applicable	Junos OS 12.2X50-D10	Junos OS 12.2X50-D10
Juniper enterprise-specific SNMP Fabric Chassis MIB	Not applicable	Not applicable	Junos OS 12.2X50-D20	Junos OS 12.2X50-D20
DHCP relay	Junos OS 11.3R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
DHCP smart relay	Junos OS 12.3X50-D10	Junos OS 12.3X50-D10	Not supported	Not supported

Table 13: Port Security Features

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Automatic recovery for port error disable conditions	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
MAC limiting	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
MAC move limiting	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Junos OS 12.2X50-D10	Junos OS 12.2X50-D10
Persistent MAC learning (sticky MAC)	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported



Table 13: Port Security Features (*continued*)

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Static ARP support	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Storm control (broadcast, unicast, and multicast)	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
DHCP snooping	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported
Dynamic ARP inspection (DAI)	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported

Table 14: QFabric System-Specific Features

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Aliasing of Node devices	Not applicable	Not applicable	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
High availability of QFabric system components	Not applicable	Not applicable	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Node groups	Not applicable	Not applicable	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
QFabric system component-level access and login classes	Not applicable	Not applicable	Junos OS 11.3X30.9	Junos OS 12.2X50-D10
Aliases for Director devices and Interconnect devices	Not applicable	Not applicable	Junos OS 12.2X50-D10	Junos OS 12.2X50-D10

Table 15: Security

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Firewall filters and rate limiting	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10



Table 15: Security (*continued*)

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Firewall filters on LAGs	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Firewall filters on loopback interfaces	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Firewall filters on management interfaces	Junos OS 12.2X50-D10	Junos OS 12.2X50-D20	Not supported	Not supported
Policing	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Increased numbers of supported filters and policers	Junos OS 12.2X50-D20	Junos OS 12.2X50-D20	Not supported	Not supported
Filter-based forwarding	Junos OS 12.2X50-D20	Junos OS 12.2X50-D20	Not supported	Not supported

(For a list of supported firewall filter match conditions and actions, see [“Firewall Filter Match Conditions and Actions” on page 4080](#).)

Table 16: Storage and Fibre Channel Features

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Data center bridging technologies	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Data Center Bridging Capability Exchange protocol (DCBX)	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
FCoE Initialization Protocol (FIP)	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Fibre Channel fabrics	Junos OS 11.1R1	Not Supported	Junos OS 11.3X30.6 *	Junos OS 12.2X50-D10 *
Fibre Channel interfaces	Junos OS 11.1R1	Not Supported	Junos OS 11.3X30.6 *	Junos OS 12.2X50-D10 *



Table 16: Storage and Fibre Channel Features (*continued*)

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Fibre Channel over Ethernet (FCoE) to Fibre Channel gateway	Junos OS 11.1R1	Not Supported	Junos OS 11.3X30.6 *	Junos OS 12.2X50-D10 *
FCoE-FC gateway link automated load balancing	Junos OS 12.3X50-D10	Not Supported	Not Supported	Not Supported
FCoE OxID hash control	Junos OS 12.3X50-D10	Junos OS 12.3X50-D10	Not Supported	Not Supported
FIP snooping	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Increase to 2500 FIP snooping sessions	Junos OS 12.3X50-D10	Junos OS 12.3X50-D10	Not Supported	Not Supported
Increase to 2500 FIP snooping sessions when QFX3500 switch acts as an FCoE-FC gateway.	Junos OS 12.3X50-D10	Not Supported	Not Supported	Not Supported
Transit switch	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
DCBX application protocol TLV exchange	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3R1	Junos OS 12.2X50-D10
User-Configurable DCBX application protocol TLV exchange	Junos OS 12.2X50-D10	Junos OS 12.2X50-D20	Junos OS 12.2X50-D10	Junos OS 12.2X50-D10
DCBX version support for IEEE DCBX and DCBX version 1.01	Junos OS 12.2X50-D10	Junos OS 12.2X50-D20	Junos OS 12.2X50-D10	Junos OS 12.2X50-D10
Graceful restart for FCoE-FC gateway	Junos OS 12.1X49-D1	Not supported	Junos OS 12.2X50-D10 *	Junos OS 12.2X50-D10 *
Fibre Channel load balancing, maximum session limit, disabling fabric WWN verification check	Junos OS 12.1X49-D1	Not supported	Junos OS 12.1X49-D1 *	Junos OS 12.2X50-D10 *



Table 16: Storage and Fibre Channel Features (*continued*)

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
VN_Port to VN_Port FIP snooping to enable configuring virtual links between VN_Ports without sending traffic through an FCoE forwarder (FCF)	Junos OS 12.2X50-D10	Not supported	Not supported	Not supported

\* Indicates that the feature is supported only with the QFX3500 Node device.

Table 17: System Management Features

Feature	QFX3500 Switch	QFX3600 Switch	QFX3000-G QFabric System	QFX3000-M QFabric System
Configuration rollback	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
IP directed broadcast	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
Online insertion and removal (OIR)	Junos OS 11.1R1	Junos OS 12.2X50-D20	Junos OS 11.3X30.6	Junos OS 12.2X50-D10
J-Web interface, for switch configuration and management	Junos OS 12.1X49-D1	Junos OS 12.2X50-D20	Not supported	Not supported
Zero Touch Provisioning	Junos OS 12.3X50-D10	Junos OS 12.3X50-D10	Not Supported	Not Supported

#### Related Documentation

- [QFX3000-G QFabric System Hardware Documentation](#)
- [QFX3000-M QFabric System Hardware Documentation](#)
- [QFX3500 Device Hardware Documentation](#)
- [QFX3600 Device Hardware Documentation](#)

## Configuration File Terms

[Table 18 on page 30](#) lists the various configuration file terms used for the QFX Series and their definitions.



Table 18: Configuration File Terms

Term	Definition
active configuration	Current committed configuration of a switch.
candidate configuration	Working copy of the configuration that allows users to make configurational changes without causing any operational changes until this copy is committed.
configuration group	Group of configuration statements that can be inherited by the rest of the configuration.
commit a configuration	Check configuration for proper syntax, activate and mark as the current configuration file running on the switching platform.
configuration hierarchy	Junos OS configuration consists of a hierarchy of statements. There are two types of statements: container statements, which contain other statements, and leaf statements, which do not contain other statements. All the container and leaf statements together form the configuration hierarchy.
default configuration	Default configuration contains the initial values set for each configuration parameter when a switch is shipped.
rescue configuration	Well-known configuration that recovers a switch from a configuration that denies management access. You set a current committed configuration to be the rescue configuration through the CLI.
roll back a configuration	Return to a previously committed configuration.

**Related Documentation**

- [Loading a Previous Configuration File on page 1122](#)
- [Reverting to the Rescue Configuration on page 150](#)
- [Understanding Configuration Files on page 1113](#)

## Format for Specifying IP Addresses, Network Masks, and Prefixes in Junos OS Configuration Statements

Many statements in the Junos OS configuration include an option to specify an IP address or route prefix. This option is represented in one of the following ways:

- **network/prefix-length**—Network portion of the IP address, followed by a slash and the destination prefix length (previously called the subnet mask). For example, **10.0.0.1/8**.
- **network**—IP address. For example, **10.0.0.2**.
- **destination-prefix/prefix-length**—Route prefix, followed by a slash and the destination prefix length. For example, **192.168.1.10/32**.

You enter all IP addresses in classless mode. You can enter the IP address with or without a prefix length, in standard dotted notation (for example, **1.2.3.4**), or hexadecimal notation as a 32-bit number in network-byte order (for example, **0x01020304**). If you omit any octets, they are assumed to be zero. Specify the prefix length as a decimal number from 1 through 32.



- Related Documentation**
- [Format for Specifying Filenames and URLs in Junos OS CLI Commands on page 48](#)

## Junos OS Commit Model for Router or Switch Configuration

The router or switch configuration is saved using a commit model: that is, a candidate configuration is modified as desired and then committed to the system. Once a configuration has been committed, the router or switch checks the configuration for syntax errors, and if no errors are found, the configuration is saved as **juniper.conf.gz** and activated. The former active configuration file is saved as the first rollback configuration file (**juniper.conf.1.gz**), and all other rollback configuration files are incremented by 1. For example, **juniper.conf.1.gz** is incremented to **juniper.conf.2.gz**, making it the second rollback configuration file. The router or switch can have a maximum of 49 rollback configurations (1–49) saved on the system.

On the router or switch, the active configuration file and the first three rollback files (**juniper.conf.gz.1**, **juniper.conf.gz.2**, **juniper.conf.gz.3**) are located in the **/config** directory. If the file **rescue.conf.gz** is saved on the system, this file should also be saved in the **/config** directory. The factory default files are located in the **/etc/config** directory.

There are two mechanisms used to propagate the configurations between Routing Engines within a router or switch:

- Synchronization—Propagates a configuration from one Routing Engine to a second Routing Engine within the same router or switch chassis.



**NOTE:** The QFX3500 switch has only one Routing Engine.

To synchronize configurations, use the **commit synchronize** CLI command. If one of the Routing Engines is locked, the synchronization fails. If synchronization fails because of a locked configuration file, you can use the **commit synchronize force** command. This command overrides the lock and synchronizes the configuration files.

- Distribution—Propagates a configuration across the routing plane on a multichassis router or switch. Distribution occurs automatically. There is no user command available to control the distribution process. If a configuration is locked during a distribution of a configuration, the locked configuration does not receive the distributed configuration file, so the synchronization fails. You need to clear the lock before the configuration and resynchronize the routing planes.



**NOTE:** When you use the **commit synchronize force** CLI command on a multichassis platform, the forced synchronization of the configuration files does not affect the distribution of the configuration file across the routing plane. If a configuration file is locked on a router or switch remote from the router or switch where the command was issued, the synchronization fails on the remote router or switch. You need to clear the lock and reissue the **synchronize** command.



- Related Documentation**
- [Configuring Junos OS for the First Time on a Router or Switch with a Single Routing Engine](#)

## Junos OS Package Names

You upgrade the Juniper Networks Junos OS on the QFX Series by copying a software package to your switch or another system on your local network and then installing the new software package on the switch.

A software package name is in the following format:



**NOTE:** A signed domestic package is used as an example only. Other types of software packages might be available in future releases.

***package-name-m.nZx.y-domestic-signed.tgz***

where:

- ***package-name*** is the name of the package—for example, ***jinstall-qfx***.
- ***m.n*** is the software release, with ***m*** representing the major release number and ***n*** representing the minor release number—for example, ***11.1***.
- ***Z*** indicates the type of software release, where ***R*** indicates released software and ***B*** indicates beta-level software.
- ***x.y*** represents the maintenance software release, with ***x*** representing the maintenance software release number and ***y*** representing the maintenance software spin number—for example, ***1.5***.

A sample switch software package name is:

***jinstall-qfx-11.1R1.5-domestic-signed.tgz***

- Related Documentation**
- [Upgrading Software on QFX3500 and QFX3600 Standalone Switches on page 107](#)
  - [Upgrading Software on a QFabric System on page 109](#)
  - [Software Installation Overview on page 94](#)



## NTP Time Server and Time Services Overview

When configuring the Network Time Protocol (NTP), you can specify which system on the network is the authoritative time source, or time server, and how time is synchronized between systems on the network. To do this, you configure the router or switch to operate in one of the following modes:

- Client mode—In this mode, the local router or switch can be synchronized with the remote system, but the remote system can never be synchronized with the local router or switch.
- Symmetric active mode—In this mode, the local router or switch and the remote system can synchronize with each other. You use this mode in a network in which either the local router or switch or the remote system might be a better source of time.



**NOTE:** Symmetric active mode can be initiated by either the local or the remote system. Only one system needs to be configured to do so. This means that the local system can synchronize with any system that offers symmetric active mode without any configuration whatsoever. However, we strongly encourage you to configure authentication to ensure that the local system synchronizes only with known time servers.

- Broadcast mode—In this mode, the local router or switch sends periodic broadcast messages to a client population at the specified broadcast or multicast address. Normally, you include this statement only when the local router or switch is operating as a transmitter.
- Server mode—In this mode, the local router or switch operates as an NTP server.



**NOTE:** In NTP server mode, the Junos OS supports authentication as follows:

- If the NTP request from the client comes with an authentication key (such as a key ID and message digest sent with the packet), the request is processed and answered based on the authentication key match.
- If the NTP request from the client comes without any authentication key, the request is processed and answered without authentication.

### Related Documentation

- [Configuring the NTP Time Server and Time Services on page 131](#)
- [Example: Configuring NTP as a Single Time Source for Router and Switch Clock Synchronization on page 160](#)



## NTP Time Server and Time Services Overview (QFabric System)

Network Time Protocol (NTP) synchronizes the time among all of the various devices in the QFabric system to an external time server. This ensures that time-stamped events, like log entries and database transactions, can be correlated between multiple devices in the QFabric system. The QFabric system can only be in client mode.

Additionally, you can authenticate time synchronization to ensure that the QFabric system obtains its time services only from known sources. By default, network time synchronization is unauthenticated. We strongly encourage you to configure authentication of network time services.

- Related Documentation**
- [Configuring NTP Authentication Keys \(QFabric System\) on page 130](#)
  - [authentication-key on page 208](#)
  - [ntp on page 241](#)
  - [server on page 253](#)

## Overview of CoS Upgrade Requirements (Junos OS Release 11.1 or 11.2 to a Later Release)

Before you upgrade to Junos OS Release 11.3, you must deactivate the CoS configuration if the CoS configuration includes any of the following features:

- **excess-rate** option
- **strict-high** or **high** priority queues
- Any of the Junos OS Release 11.1 or 11.2 default multidestination forwarding classes



**CAUTION:** If your CoS configuration contains any of the features listed above and you attempt to upgrade from Junos OS Release 11.1 or 11.2 to a later version without first editing the configuration, the Junos OS might not restart.

Junos OS Release 11.3 and later for QFX Series no longer supports the **excess-rate** statement, the **strict** priority option, or the default multidestination forwarding classes used in Junos OS Release 11.1 and 11.2. In addition, Junos OS Release 11.3 introduces new restrictions on how to configure and use **strict-high** priority queues.

This topic does not describe how to perform the software upgrade procedure. It describes how to deactivate your CoS configuration, edit your CoS configuration, and reactivate your CoS configuration at the appropriate times.

Use the following procedure to upgrade safely from Junos OS Release 11.1 or 11.2 to a later release:

1. Deactivate the CoS configuration *before* you upgrade the software:  
`user@switch# deactivate class-of-service`
2. Follow the upgrade procedure to Junos OS Release 11.3 or later software.



3. Make the following changes to the CoS configuration while the CoS configuration is still deactivated:
  - Remove the **excess-rate** statement from the CoS configuration if you have used it at the **[edit class-of-service schedulers]** or **[edit class-of-service traffic-control-profiles]** hierarchy level.
  - Remove the **strict-high** and **strict** priority queue configurations if you have used them at the **[edit class-of-service schedulers]** hierarchy level.
  - Remove the default multdestination forwarding classes (**mcast-be**, **mcast-af**, **mcast-ef**, and **mcast-nc**) if you have used them at the **[edit class-of-service schedulers]**, **[edit class-of-service rewrite-rules]**, **[edit class-of-service classifiers]**, **[edit class-of-service scheduler-maps]**, or **[edit class-of-service forwarding-class-sets]** hierarchy level. Alternatively, you can change the mapping of the multdestination traffic to use the new default multdestination forwarding class (**mcast**).
4. If desired, configure **strict-high** priority queues in accordance with the Junos OS Release 11.3 or later configuration rules, and map multdestination traffic to the default multdestination forwarding class (**mcast**).
5. Activate the CoS configuration:
 

```
user@switch# activate class-of-service
```
6. Commit the CoS configuration:
 

```
user@switch# commit
```



**NOTE:** If you configured the **transmit-rate** option for any queues under the **[edit class-of-service schedulers]** hierarchy level, if the rate is configured as an exact rate in Mbps, we recommend that you reconfigure the **transmit-rate** option as a percentage. This is because the scheduler converts exact rates to percentages, and when the exact rate is below 1 Gbps, some granularity may be lost in the conversion. You can avoid this potential issue by specifying the **transmit-rate** option as a percentage.

#### Related Documentation

- [Upgrading Software on QFX3500 and QFX3600 Standalone Switches on page 107](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Understanding CoS Output Queue Schedulers on page 4876](#)
- [Understanding CoS Traffic Control Profiles on page 4886](#)
- [Overview of CoS Upgrade Requirements to Junos OS Release 12.2 on page 4808](#)
- [Overview of CoS Upgrade Requirements to Junos OS Release 12.3 on page 4810](#)
- [Example: Configuring Unicast Classifiers on page 5014](#)
- [Example: Configuring Queue Schedulers on page 5030](#)
- [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)



## Understanding Autoinstallation of Configuration Files

Autoinstallation is the automatic configuration of a device over the network from a preexisting configuration file that you create and store on a configuration server—typically a Trivial File Transfer Protocol (TFTP) server. You can use autoinstallation to configure new devices automatically and to deploy multiple devices from a central location in the network.

You enable autoinstallation so that the switches in your network implement autoinstallation when they are powered on. To configure autoinstallation, you specify a configuration server, an autoinstallation interface, and a protocol for IP address acquisition.

This topic describes:

- [Typical Uses for Autoinstallation on page 36](#)
- [Autoinstallation Configuration Files and IP Addresses on page 36](#)
- [Typical Autoinstallation Process on a New Switch on page 37](#)

### Typical Uses for Autoinstallation

---

Typical uses for autoinstallation of the software include:

- To deploy and update multiple devices from a central location in the network.
- To update a device—Autoinstallation occurs when a device that has been manually configured for autoinstallation is powered on.

### Autoinstallation Configuration Files and IP Addresses

---

For the autoinstallation process to work, you must store one or more host-specific or default configuration files on a configuration server in the network and have a service available—typically Dynamic Host Configuration Protocol (DHCP)—to assign an IP address to the switch.

You can set up the following configuration files for autoinstallation on the switch:

- **network.conf**—Default configuration file for autoinstallation, in which you specify IP addresses and associated hostnames for devices on the network.
- **switch.conf**—Default configuration file for autoinstallation with a minimum configuration sufficient for you to telnet to the device and configure it manually.
- **hostname.conf**—Host-specific configuration file for autoinstallation on a device that contains all the configuration information necessary for the switch. In the filename, **hostname** is replaced with the hostname assigned to the switch.

If the server with the autoinstallation configuration file is not on the same LAN segment as the new device, or if a specific device is required by the network, you must configure an intermediate device directly attached to the new switch, through which the new switch can send TFTP, Boot Protocol (BOOTP), and Domain Name System (DNS) requests. In this case, you specify the IP address of the intermediate device as the location to receive TFTP requests for autoinstallation.



---

### Typical Autoinstallation Process on a New Switch

---

When the switch configured for autoinstallation is powered on, it performs the following autoinstallation tasks:

1. The switch sends out DHCP or BOOTP requests on each connected interface simultaneously to obtain an IP address.

If a DHCP server responds to these requests, it provides the switch with some or all of the following information:

- An IP address and subnet mask for the autoinstallation interface.
- The location of the (typically) TFTP server, Hypertext Transfer Protocol (HTTP) server, or FTP server on which the configuration file is stored.
- The name of the configuration file to be requested from the TFTP server.
- The IP address or hostname of the TFTP server.

If the DHCP server provides the server's hostname, a DNS server must be available on the network to resolve the name to an IP address.

- The IP address of an intermediate device if the configuration server is on a different LAN segment from the switch.
2. After the switch acquires an IP address, the autoinstallation process on the switch attempts to download a configuration file in the following ways:
    - a. If the DHCP server specifies the host-specific configuration file **hostname.conf**, the switch uses that filename in the TFTP server request. The autoinstallation process on the new switch makes three unicast TFTP requests for **hostname.conf**. If these attempts fail, the switch broadcasts three requests to any available TFTP server for the file.
    - b. If the switch does not locate a **hostname.conf** file, the autoinstallation process sends three unicast TFTP requests for a **network.conf** file that contains the switch's hostname-to-IP-address mapping information. If these attempts fail, the switch broadcasts three requests to any available TFTP server for the file.
    - c. If the switch fails to find a **network.conf** file that contains a hostname entry for the switch, the autoinstallation process sends out a DNS request and attempts to resolve the switch's IP address to a hostname.
    - d. If the switch determines its hostname, it sends a TFTP request for the **hostname.conf** file.
    - e. If the switch is unable to map its IP address to a hostname, it sends TFTP requests for the default configuration file **switch.conf**. The TFTP request procedure is the same as for the **network.conf** file.
  3. After the switch locates a configuration file on a TFTP server, the autoinstallation process downloads the file, installs the file on the switch, and commits the configuration.



- Related Documentation**
- [Configuring Autoinstallation of Configuration Files \(CLI Procedure\) on page 118](#)
  - [Connecting and Configuring an EX Series Switch \(CLI Procedure\)](#)
  - [Connecting and Configuring an EX Series Switch \(J-Web Procedure\)](#)
  - [Configuration Files Terms](#)

## Understanding Zero Touch Provisioning

Zero Touch Provisioning allows you to provision new Juniper Networks switches in your network automatically, without manual intervention. When you physically connect a switch to the network and boot it with a default factory configuration, it attempts to upgrade the Junos OS software automatically and autoinstall a configuration file from the network. To make sure you have the default factory configuration loaded on the switch, issue the **request system zeroize** command on the switch you want to provision.

The switch uses information that you configure on a Dynamic Host Configuration Protocol (DHCP) server to locate the necessary software image and configuration files on the network. If you do not configure the DHCP server to provide this information, the switch boots with the preinstalled software and default factory configuration.

The Zero Touch Provisioning process will either upgrade or downgrade the Junos OS version. During an downgrade:

- On an EX Series switch, if you downgrade to a software version earlier than Junos OS Release 12.2, in which Zero Touch Provisioning is not supported, the configuration file autoinstall phase of the Zero Touch Provisioning process does not happen.
- On an EX Series switch, to downgrade to a software version that does not support resilient dual-root partitions (Junos OS Release 10.4R2 or earlier), you must perform some manual work on the switch. For more information, see [Understanding Resilient Dual-Root Partitions on Switches](#).

When you boot a switch with the default factory configuration, the following process happens:

1. If DHCP option 43, suboption 00 (the name of the software image file on the FTP, HTTP, or TFTP server) is configured, the switch compares the version of the provided software image to the version of the software installed on the switch.
2. If DHCP option 43, suboption 02 (a symbolic link to the software image file on the FTP, HTTP, or TFTP server), the switch compares the version of the provided software image to the version of the software installed on the switch.
  - If the Junos OS versions are different, the switch downloads the software image from the FTP, HTTP, or TFTP server, installs the Junos OS, and reboots using the default factory configuration.
  - If the software versions are the same, the switch does not upgrade the software.
3. If DHCP option 43, suboption 01 (the name of the configuration file on the FTP, TFTP, or HTTP server is configured, the switch compares the version of the provided configuration file to the version of the configuration file on the switch.



If DHCP option 43 suboption 01 is not specified, the switch uses the default factory configuration.

If the configuration file version on the FTP, HTTP, or TFTP server is newer than the configuration file on the switch, the configuration file is updated on the switch.

If both DHCP option 43 suboption 01 and suboption 2 are specified, suboption 01 is processed before suboption 02. The Junos OS is upgraded, and then the configuration file is applied.

4. If DHCP option 43, suboption 03 (the transfer mode setting) is configured, the switch accesses the FTP, HTTP, or TFTP server using the specified transfer mode setting—for example, FTP.

If DHCP option 43, suboption 03, is not configured, TFTP becomes the transfer mode automatically.

5. If either DHCP option 150 or option 66 is specified, the IP address of the FTP, HTTP, or TFTP server is configured.



**NOTE:** If both DHCP option 150 and option 66 are specified, option 150 will take precedence, and option 66 will be ignored.

6. (Optional) If DHCP option 7 is specified, you can configure one or more syslog servers.
7. (Optional) If DHCP option 42 is specified, you can configure one or more NTP servers.
8. (Optional) If DHCP option 12 is specified, you can configure the hostname of the switch.

#### Related Documentation

- [Configuring Zero Touch Provisioning on page 77](#)

## Understanding DHCP Services for Switches

A Dynamic Host Configuration Protocol (DHCP) server on a Juniper Networks EX Series Ethernet Switch can provide many valuable TCP/IP network services. For example, DHCP can dynamically allocate the four required IP parameters to each computer on the LAN: IP address, network mask, router or switch address, and name server address. Additionally, DHCP on the switch can automatically upgrade software on client systems.

This topic describes:


- [DHCP Client/Server Model on page 40](#)
- [Using DHCP on page 40](#)
- [DHCP Relay Servers and DHCP Servers on page 41](#)
- [Legacy DHCP and Extended DHCP for Server Versions on page 41](#)
- [Configuring DHCP on a Switch on page 42](#)
- [How DHCP Works on page 42](#)



### DHCP Client/Server Model

DHCP IP address allocation works on a client/server model in which the server, in this case a switch, assigns the client reusable IP information from an address pool. A DHCP client might receive offer messages from multiple DHCP servers and can accept any one of the offers; however, the client usually accepts the first offer it receives. See [Figure 7 on page 40](#).

Figure 7: DHCP Client/Server Model

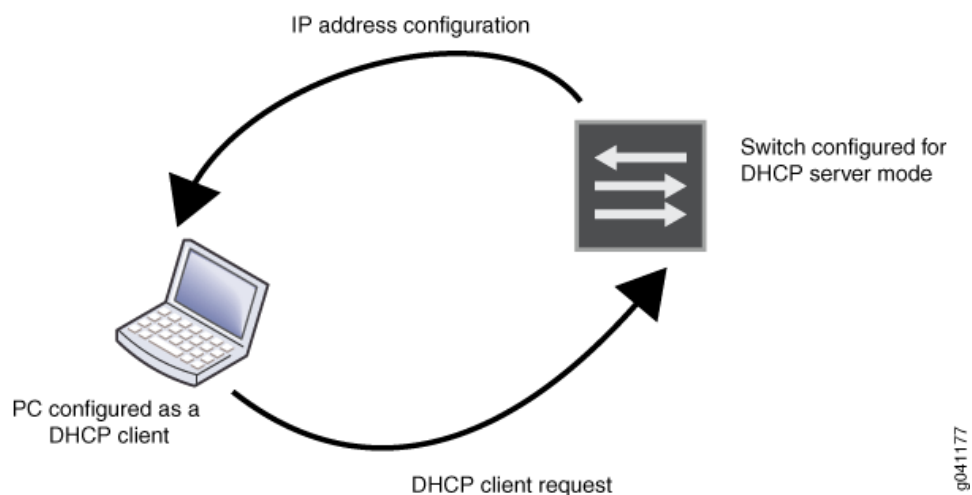

### Using DHCP

DHCP automates network-parameter assignment to network devices. Even in small networks, DHCP is useful because it makes it easy to add new machines to the network.

DHCP access service minimizes the overhead required to add clients to the network by providing a centralized, server-based setup, which means that you do not have to manually create and maintain IP address assignments for clients. In addition, when you use DHCP to manage a pool of IP addresses among hosts, you reduce the number of IP addresses needed on the network. DHCP does this by leasing an IP address to a host for a limited period of time, allowing the DHCP server to share a limited number of IP addresses. DHCP also provides a central database of devices that are connected to the network and eliminates duplicate resource assignments. In addition to IP addresses for clients, DHCP provides other configuration information, particularly the IP addresses of local caching Domain Name System (DNS) resolvers, network boot servers, or other service hosts.

Another valuable DHCP feature is automatic software download for installation of software packages on switches. DHCP clients configured for automatic software download receive messages as part of the DHCP message exchange process—when the software package name in the DHCP server message is different from that of the software package that booted the DHCP client switch, the new software is downloaded and installed. See [“Upgrading Software Using Automatic Software Download” on page 114](#).



## DHCP Relay Servers and DHCP Servers

You can configure a switch either as a DHCP server or as a DHCP relay server, but not both. Whereas a DHCP server replies to a client with an IP address, a DHCP relay server relays DHCP messages to and from the configured DHCP server, even if the client and server are on different IP networks.

Configure a switch to be a DHCP relay agent if you have locally attached hosts and a remote DHCP server. For directions on configuring a DHCP relay server, see [DHCP/BOOTP Relay for Switches Overview](#).

## Legacy DHCP and Extended DHCP for Server Versions

Two versions of both DHCP server and DHCP relay agent are available on EX Series switches and on the QFX Series. The original legacy DHCP server and legacy DHCP relay agent can be used in the same network as the extended DHCP servers and extended DHCP relay agent—extended DHCP is also referred to as virtual router (VR) aware DHCP.

You cannot configure legacy DHCP and extended DHCP versions on the same switch. Because the newer extended DHCP server version has more features, we recommend that you configure the extended DHCP server if it is supported by the switch. See [EX Series Switch Software Features Overview](#) for a list of switches that support the extended DHCP server.

The extended DHCP server version has the following added features:

- Graceful Routing Engine switchover (GRES), which provides mirroring support for clients. For details, see [High Availability Features for EX Series Switches Overview](#).
- Virtual routing and forwarding (VRF), which allows multiple instances of a routing table to simultaneously coexist on the same switch. For details, see [Understanding Virtual Routing Instances on EX Series Switches](#).



**NOTE:** Legacy DHCP supports the circuit ID and the remote ID fields for the relay agent option (option 82). Extended DHCP for the relay agent option supports only circuit ID. See [EX Series Switch Software Features Overview](#) for a list of switches that support extended DHCP (VR-aware DHCP).

Legacy DHCP and extended DHCP servers can be configured at the hierarchy levels shown in [Table 19 on page 41](#):

**Table 19: Legacy DHCP and Extended DHCP Server Hierarchy Levels**

DHCP Service	Hierarchy
Extended DHCP server	<code>edit system services dhcp-local-server</code>
Extended DHCP address pool	<code>edit access address-assignment pool</code>
Legacy DHCP server	<code>edit system services dhcp</code>



Table 19: Legacy DHCP and Extended DHCP Server Hierarchy Levels (*continued*)

DHCP Service	Hierarchy
Legacy DHCP relay	<code>edit forwarding-options helpers bootp</code>
Extended DHCP relay	<code>edit forwarding-options dhcp-relay</code>
Legacy DHCP address pool	<code>edit system services dhcp pool</code>

DHCP clients on a switch are always configured at the hierarchy level `[edit interfaces interface-name family dhcp]`.

### Configuring DHCP on a Switch

A DHCP configuration consists of two parts: the configuration for a DHCP server and the configuration for DHCP clients. The DHCP server configuration is simple if you accept the default configurations.

When you configure a legacy DHCP server, you only need to define the DHCP server name and the interface on the switch. You can use the default configuration for the rest of the settings. When you configure an extended DHCP server, you need to only define a DHCP pool, indicate IP addresses for the pool, and create a server group. You can use the default configuration for the rest of the settings.


For directions for configuring either a legacy DHCP server or an extended DHCP server, see “[Configuring a DHCP Server on Switches \(CLI Procedure\)](#)” on page 121.

To configure a DHCP client, set the client’s DHCP interface address in the `[edit interfaces interface-name unit 0 family inet dhcp]` hierarchy. For directions for configuring a DHCP client on a switch, see “[Configuring a DHCP Client \(CLI Procedure\)](#)” on page 120.

### How DHCP Works

DHCP consists of a four-step transfer process beginning with a broadcast DHCP discovery message from the client. As the second step, the client receives a DHCP offer message from the server. This message includes the IP address and mask, and some other specific parameters. The client then sends a DHCP request message to accept the IP address and other parameters that it received from the server in the previous step. The DHCP server sends a DHCP response message and removes the now-allocated address from the DHCP address pool. See [Figure 8 on page 42](#).

Figure 8: DHCP Four-Step Transfer

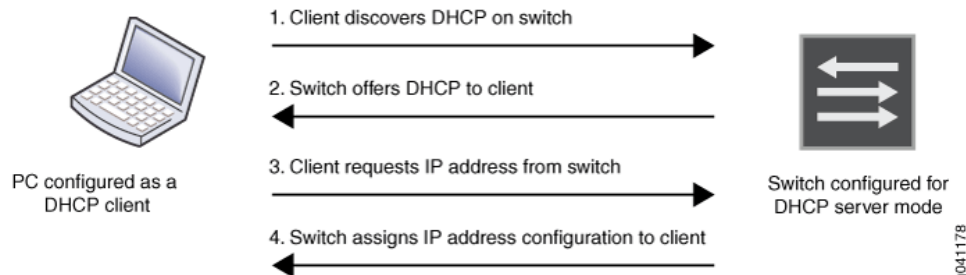





**NOTE:** Because the DHCP discovery message from the client is a broadcast message and because broadcast messages cross other segments only when they are explicitly routed, you might have to configure a DHCP relay agent on the switch interface so that all DHCP discovery messages from the clients are forwarded to one DHCP server.

#### Related Documentation

- [Configuring a DHCP Client \(CLI Procedure\) on page 120](#)
- [Configuring a DHCP Server on Switches \(CLI Procedure\) on page 121](#)
- [Configuring an Extended DHCP Relay Server on EX Series Switches \(CLI Procedure\)](#)
- [Configuring a DHCP SIP Server \(CLI Procedure\)](#)
- [Upgrading Software Using Automatic Software Download on page 114](#)
- [Monitoring DHCP Services](#)

## Understanding Software Infrastructure and Processes

The QFX Series products run the Juniper Networks Junos OS. Junos OS includes processes for Internet Protocol (IP) routing and for managing interfaces, networks, and the switch.

Junos OS runs on the Routing Engine. The Routing Engine kernel coordinates communication among the Junos OS processes and provides a link to the Packet Forwarding Engine.

Using the Junos OS command-line interface (CLI), you configure switching features and set the properties of network interfaces. After activating a software configuration, use either the Junos Space or CLI user interface to monitor, manage operations, and diagnose protocol and network connectivity problems.

- [Routing Engine and Packet Forwarding Engine on page 43](#)
- [Junos OS Processes on page 44](#)

### Routing Engine and Packet Forwarding Engine

A switch has two primary software processing components:

- **Packet Forwarding Engine**—Processes packets; applies filters, routing policies, and other features; and forwards packets to the next hop along the route to their final destination.
- **Routing Engine**—Provides three main functions:
  - Creates the packet forwarding switch, which provides route lookup, filtering, and switching on incoming data packets, and then directs outbound packets to the appropriate interface for transmission to the network.
  - Maintains the routing tables used by the switch and controls the routing protocols that run on the switch.



- Provides control and monitoring functions for the switch, including controlling power and monitoring system status.

### Junos OS Processes

Junos OS running on the Routing Engine and Packet Forwarding Engine consists of multiple processes that are responsible for individual functions.

The separation of functions provides operational stability, because each process accesses its own protected memory space. In addition, because each process is a separate software package, you can selectively upgrade all or part of the Junos OS for added flexibility.

Table 20 on page 44 describes the primary Junos OS processes.

**Table 20: Junos OS Processes**

Process	Name	Description
Chassis process	chassisd	<p>Detects hardware on the system that is used to configure network interfaces.</p> <p>Monitors the physical status of hardware components and field-replaceable units (FRUs), detecting when environment sensors such as temperature sensors are triggered.</p> <p>Relays signals and interrupts—for example, when devices are taken offline, so that the system can close sessions and shut down gracefully.</p>
DNS Server process	named-service	Resolves hostnames into addresses.
Dynamic Host Configuration Protocol (DHCP) process	dhcp-service	Enables a DHCP server to allocate network IP addresses and deliver configuration settings to client hosts without user intervention.
Ethernet switching process	eswd	<p>Handles Layer 2 switching functionality such as MAC address learning, Spanning Tree Protocol, and access port security.</p> <p>Manages Ethernet switching interfaces, VLANs, and VLAN interfaces.</p>
Firewall management process	firewall	Manages the firewall configuration and helps accept or reject packets that are transiting an interface on a switch.
Forwarding process	pfem	Defines how routing protocols operate on the partition. The overall performance of the partition is largely determined by the effectiveness of the forwarding process.
Interface process	dcd	Configures and monitors network interfaces by defining physical characteristics such as link encapsulation, hold times, and keepalive timers.
Integrated Local Management Interface (ILMI) process	ilmi	Provides bidirectional exchange of management information between two ATM interfaces across a physical connection.
Link Management Protocol (LMP) process	link-management	Establishes and maintains LMP control channels.



Table 20: Junos OS Processes (*continued*)

Process	Name	Description
Management process	mgd	<p>Provides communication between the other processes and an interface to the configuration database.</p> <p>Populates the configuration database with configuration information and retrieves the information when queried by other processes to ensure that the system operates as configured.</p> <p>Interacts with the other processes when commands are issued through one of the user interfaces on the partition.</p> <p>If a process terminates or fails to start when called, the management process attempts to restart it a limited number of times to prevent thrashing and logs any failure information for further investigation.</p>
Multicast snooping process	<del>multicast</del> snooping	Makes Layer 2 devices, such as VLAN switches, aware of Layer 3 information, such as the media access control (MAC) addresses of members of a multicast group.
Secure Neighbor Discovery (SEND) Protocol process	send	Protects Neighbor Discovery Protocol (NDP) messages.
Simple Network Management Protocol (SNMP) process	snmp	Enables the monitoring of network devices from a central location and provides the switch's SNMP master agent.
Tunnel OAM process	tunnel-oamd	Enables the Operations, Administration, and Maintenance of Layer 2 tunneled networks. Layer 2 protocol tunneling (L2PT) allows service providers to send Layer 2 protocol data units (PDUs) across the provider's cloud and deliver them to Juniper Networks EX Series Ethernet Switches that are not part of the local broadcast domain.
Virtual Router Redundancy Protocol (VRRP) process	vrrp	Enables hosts on a LAN to make use of redundant routing platforms on that LAN without requiring more than the static configuration of a single default route on the hosts.

**Related Documentation**

- [Junos OS Baseline Network Operations Guide](#)
- [Junos OS System Basics Configuration Guide](#)

## User Interfaces

- [CLI User Interface Overview on page 46](#)
- [Configuring CLI Tips on page 48](#)
- [Format for Specifying Filenames and URLs in Junos OS CLI Commands on page 48](#)
- [Junos OS Operational Mode Commands That Combine Other Commands on page 50](#)
- [Overview of Junos OS CLI Operational Mode Commands on page 51](#)
- [Overview of Navigating the CLI on page 53](#)



- [Understanding the Brief, Detail, Extensive, and Terse Options of Junos OS Operational Commands on page 55](#)
- [Understanding Junos OS CLI Configuration Mode on page 56](#)

## CLI User Interface Overview

- [CLI Overview on page 46](#)
- [CLI Key Features on page 46](#)
- [CLI Command Modes on page 47](#)

### CLI Overview

---

The command-line interface (CLI) is the software interface you use to access, monitor, configure, troubleshoot, and manage a device running Junos OS. You can access the CLI either from the console or through a network connection. The CLI is a Juniper Networks-specific command shell that runs on top of a FreeBSD UNIX-based operating system kernel.

The CLI provides a variety of UNIX utilities, such as Emacs-style keyboard sequences, which allows you to perform the following actions:

- Move around on a command line and scroll through recently executed commands.
- Match regular expressions to locate and replace values and identifiers in a configuration.
- Filter command output.
- Log file entries.
- Store and archive device files on a UNIX-based file system.

You can exit the CLI environment and create a UNIX C shell or Bourne shell to navigate the file system, manage processes, and perform other tasks.

### CLI Key Features

---

The CLI commands and statements follow a hierarchical organization and have consistent syntax. The CLI provides the following features for ease of use:

- Consistent command names—Commands that provide the same type of function have the same name, regardless of the portion of the software on which they are operating. For example, all **show** commands display software information and statistics, and all **clear** commands erase various types of system information.
- Lists and short descriptions of available commands—Information about available commands is provided at each level of the CLI command hierarchy. If you type a question mark (?) at any level, you see a list of the available commands along with a short description of each command. This means that if you already are familiar with the Junos OS, you can use many of the CLI commands without referring to the documentation.
- Command completion—Command completion for command names (keywords) and for command options is available at each level of the hierarchy. To complete a command or option that you have partially typed, press Tab or the Spacebar. If the



partially typed letters begin a string that uniquely identifies a command, the complete command name appears. Otherwise, a beep indicates that you have entered an ambiguous command, and the possible completions are displayed. Completion also applies to other strings, such as filenames, interface names, usernames, and configuration statements.

## CLI Command Modes

The CLI has two modes, operational mode and configuration mode.

- Operational mode—This mode displays the current status of the device. In operational mode, you enter commands to monitor and troubleshoot Junos OS and devices and network connectivity. Operational mode is indicated by the **>** prompt—for example, **user@switch> clear**
- Configuration mode—A Junos OS device configuration is stored as a hierarchy of statements. In configuration mode, you can define all properties of the Juniper Networks Junos OS, including interfaces, VLANs, Virtual Chassis information, user access, and several system hardware properties. To enter configuration mode, enter the **configure** command. Configuration mode is indicated by the **#** prompt and includes the current location in the configuration hierarchy—for example:

```
[edit interfaces ge-0/0/12]  
user@switch#
```

In configuration mode, you are actually viewing and changing the candidate configuration file. The candidate configuration allows you to make configuration changes without causing operational changes to the current operating configuration, called the active configuration. When you commit the changes you added to the candidate configuration, the system updates the active configuration. Candidate configurations enable you to alter your configuration without causing potential damage to your current network operations.

To activate your configuration changes, enter the **commit** command.

When you commit the candidate configuration, you can require an explicit confirmation for the commit to become permanent by using the **commit confirmed** command. This is useful for verifying that a configuration change works correctly and does not prevent management access to the switch. After you issue the **commit confirmed** command, you must issue another **commit** command within the defined period of time (10 minutes by default), or the system reverts to the previous configuration.

You can also activate your configuration changes and exit configuration mode with a single command, **commit and-quit**. This command succeeds only if there are no mistakes or syntax errors in the configuration.

To return to operational mode, go to the top of the configuration hierarchy and then quit—for example:

```
[edit interfaces ge-0/0/12]  
user@switch# top  
[edit]
```



**user@switch# exit**

When you monitor and configure a device running Junos OS, you may need to switch between operational mode and configuration mode. When you change to configuration mode, the command prompt also changes. The operational mode prompt is a right angle bracket (>) and the configuration mode prompt is a pound sign (#).

When you log in to the switch and type the **cli** command, you are automatically in operational mode. To switch to configuration mode, type the **configure** command or the **edit** command.

The CLI prompt changes from **user@switch>** to **user@switch#**, and a banner appears to indicate the hierarchy level.

To return to operational mode as well as commit your changes, enter **command and-quit**. To return to operational mode without committing any of your changes, enter **exit**.

To display the output of an operational mode command, such as **show**, while in configuration mode, issue the **run** configuration mode command and then specify the operational mode command.

**Related  
Documentation**

- [Configuring CLI Tips on page 48](#)
- [Overview of Navigating the CLI on page 53](#)
- CLI User Guide
- [Other Tools to Configure and Monitor Devices Running Junos OS on page 280](#)

## Configuring CLI Tips

The Junos OS CLI provides the option of configuring CLI tips for the user. By default, the **tip** command is not enabled when a user logs in.

- To enable tips, include the **login-tip** statement at the **[edit system login class *class-name*]** hierarchy level:

```
[edit system login class class-name]  
login-tip;
```

Adding this statement enables the **tip** command for the class specified, provided the user logs in using the CLI.

**Related  
Documentation**

- [CLI User Interface Overview on page 46](#)
- Defining Junos OS Login Classes
- [login-tip on page 233](#)

## Format for Specifying Filenames and URLs in Junos OS CLI Commands

In some command-line interface (CLI) commands and configuration statements—including **file copy**, **file archive**, **load**, **save**, **set system login user *username* authentication *load-key-file***, and **request system software add**—you can include a filename.



On a routing matrix, you can include chassis information (for example, **lcc0**, **lcc0-re0**, or **lcc0-re1**) as part of the filename.

A *routing matrix* is a multichassis architecture composed of either one TX Matrix router and from one to four T640 routers connected to the TX Matrix router, or one TX Matrix Plus router and from one to four T1600 routers connected to the TX Matrix Plus router. From the perspective of the user interface, the routing matrix appears as a single router. On a routing matrix composed of the TX Matrix router and T640 routers, the TX Matrix router controls all the T640 routers. On a routing matrix composed of a TX Matrix Plus router and T1600 routers, the TX Matrix Plus router controls all the T1600 routers.

You can specify a filename or URL in one of the following ways:

- **filename**—File in the user's current directory on the local CompactFlash card (not applicable on the QFX Series). You can use wildcards to specify multiple source files or a single destination file. Wildcards are not supported in Hypertext Transfer Protocol (HTTP) or FTP.



**NOTE:** Wildcards are supported only by the **file** (**compare** | **copy** | **delete** | **list** | **rename** | **show**) commands. When you issue the **file show** command with a wildcard, it must resolve to one filename.

- **path/filename**—File on the local flash disk.
- **/var/filename** or **/var/path/filename**—File on the local hard disk. You can also specify a file on a local Routing Engine for a specific T640 router or a T1600 router in a routing matrix:  
  

```
user@host> file delete lcc0-re0:/var/tmp/junk
```
- **a:filename** or **a:path/filename**—File on the local removable media. The default path is **/** (the root-level directory). The removable media can be in MS-DOS or UNIX (UFS) format.
- **hostname:path/filename**, **hostname:filename**, **hostname:path/filename**, or **"scp://hostname/path/filename"**—File on an **scp/ssh** client. This form is not available in the worldwide version of the Junos OS. The default path is the user's home directory on the remote system. You can also specify **hostname** as **username@hostname**.
- **ftp://hostname/path/filename**—File on an FTP server. You can also specify **hostname** as **username@hostname** or **username:password@hostname**. The default path is the user's home directory. To specify an absolute path, the path must start with **%2F**; for example, **ftp://hostname/%2Fpath/filename**. To have the system prompt you for the password, specify **prompt** in place of the password. If a password is required and you do not specify the password or **prompt**, an error message is displayed:

```
user@host> file copy ftp://username@ftp.hostname.net/filename
file copy ftp.hostname.net: Not logged in.
```

```
user@host> file copy ftp://username:prompt@ftp.hostname.net/filename
Password for username@ftp.hostname.net:
```



- **re0:/path/filename** or **re1:/path/filename**—File on a local Routing Engine. You can also specify a file on a local Routing Engine for a specific T640 router or a T1600 router in a routing matrix:

```
user@host> show log lcc0-re1:chassisd
```



**NOTE:** You cannot specify a URL for a file on a Hypertext Transfer Protocol (HTTP) server, because HTTP URLs are not writable.

#### Related Documentation

- [Format for Specifying IP Addresses, Network Masks, and Prefixes in Junos OS Configuration Statements on page 30](#)
- [Default Directories for Junos OS File Storage on the Router or Switch](#)

## Junos OS Operational Mode Commands That Combine Other Commands

In some cases, some Junos OS operational commands are created from a combination of other operational commands. These commands can be useful shortcuts for collecting information about the device, as shown in [Figure 9 on page 50](#).

**Figure 9: Commands That Combine Other Commands**

The **request support information** command provides output from a combination of other operational commands.

```
user@host> request support information

root@host> show system uptime

Current time: 2007-02-16 13:10:08 PST
System booted: 2007-02-02 09:21:50 PST (2w0d 03:48 ago)
Protocols started: 2007-02-02 09:24:42 PST (2w0d 03:45 ago)
Last configured: 2007-02-16 03:04:58 PST (10:05:10 ago) by root
1:10PM up 14 days, 3:48, 2 users, load averages: 0.01, 0.02, 0.00

root@host> show version detail

Hostname: host
Model: m320
JUNOS Base OS boot [8.3-R1.1]
```

```
root@host> show system core-dumps

/var/tmp/*core*: No such file or directory
/var/crash/kernel.*: No such file or directory

/var/crash/cores:
total 9780
-rw-r--r-- 1 root wheel 4990976 Feb 9 15:39
core-FPC2.core.0.060209.1539

root@host> show chassis hardware detail

Hardware inventory:
Item          Version  Part number  Serial number  Description
Chassis              M20
Backplane    REV 07  710-001517  AW44 31       M20 Backplane
Power Supply B REV 09  740-001466  0042 33       DC Power Supply
```

#### Related Documentation

- [Overview of Junos OS CLI Operational Mode Commands on page 51](#)
- [Understanding the Brief, Detail, Extensive, and Terse Options of Junos OS Operational Commands on page 55](#)



## Overview of Junos OS CLI Operational Mode Commands

This topic provides an overview of Junos OS CLI operational mode commands and contains the following sections:

- [CLI Command Categories on page 51](#)
- [Commonly Used Operational Mode Commands on page 52](#)

### CLI Command Categories

When you log in to a device running Junos OS and the CLI starts, there are several broad groups of CLI commands:

- Commands for controlling the CLI environment—Some set commands in the **set** hierarchy configure the CLI display screen. For information about these commands, see *Understanding the Junos OS CLI Modes, Commands, and Statement Hierarchies*.
- Commands for monitoring and troubleshooting—The following commands display information and statistics about the software and test network connectivity. Detailed command descriptions are provided in the *Junos OS Interfaces Command Reference*.
  - **clear**—Clear statistics and protocol database information.
  - **mtrace**—Trace mtrace packets from source to receiver.
  - **monitor**—Perform real-time debugging of various software components, including the routing protocols and interfaces.
  - **ping**—Determine the reachability of a remote network host.
  - **show**—Display the current configuration and information about interfaces, routing protocols, routing tables, routing policy filters, system alarms, and the chassis.
  - **test**—Test the configuration and application of policy filters and autonomous system (AS) path regular expressions.
  - **traceroute**—Trace the route to a remote network host.
- Commands for connecting to other network systems—The **ssh** command opens Secure Shell connections, and the **telnet** command opens telnet sessions to other hosts on the network. For information about these commands, see the Junos OS Operational Mode Commands.
- Commands for copying files—The **copy** command copies files from one location on the router or switch to another, from the router or switch to a remote system, or from a remote system to the router or switch. For information about these commands, see the Junos OS Operational Mode Commands.
- Commands for restarting software processes—The commands in the **restart** hierarchy restart the various Junos OS processes, including the routing protocol, interface, and SNMP. For information about these commands, see the Junos OS Operational Mode Commands.



- A command—**request**—for performing system-level operations, including stopping and rebooting the router or switch and loading Junos OS images. For information about this command, see the Junos OS Operational Mode Commands.
- A command—**start**—to exit the CLI and start a UNIX shell. For information about this command, see the Junos OS Operational Mode Commands.
- A command—**configure**—for entering configuration mode, which provides a series of commands that configure Junos OS, including the routing protocols, interfaces, network management, and user access. For information about the CLI configuration commands, see [“Understanding Junos OS CLI Configuration Mode” on page 56](#).
- A command—**quit**—to exit the CLI. For information about this command, see the Junos OS Operational Mode Commands.
- For more information about the CLI operational mode commands, see the Junos OS Operational Mode Commands and the Junos OS Operational Mode Commands.

### Commonly Used Operational Mode Commands

Table 21 on page 52 lists some operational commands you may find useful for monitoring router or switch operation. For a complete description of operational commands, see the Junos OS command references.



**NOTE:** The QFX3500 switch does not support the IS-IS, OSPF, BGP, MPLS, and RSVP protocols.

**Table 21: Commonly Used Operational Mode Commands**

Items to Check	Description	Command
Software version	Versions of software running on the router or switch	<b>show version</b>
Log files	Contents of the log files	<b>monitor</b>
	Log files and their contents and recent user logins	<b>show log</b>
Remote systems	Host reachability and network connectivity	<b>ping</b>
	Route to a network system	<b>traceroute</b>
Configuration	Current system configuration	<b>show configuration</b>
Manipulate files	List of files and directories on the router or switch	<b>file list</b>
	Contents of a file	<b>file show</b>
Interface information	Detailed information about interfaces	<b>show interfaces</b>



Table 21: Commonly Used Operational Mode Commands (*continued*)

Items to Check	Description	Command
Chassis	Chassis alarm status	<b>show chassis alarms</b>
	Information currently on craft display	<b>show chassis craft-interface</b>
	Router or switch environment information	<b>show chassis environment</b>
	Hardware inventory	<b>show chassis hardware</b>
Routing table information	Information about entries in the routing tables	<b>show route</b>
Forwarding table information	Information about data in the kernel's forwarding table	<b>show route forwarding-table</b>
IS-IS	Adjacent routers or switches	<b>show isis adjacency</b>
OSPF	Display standard information about OSPF neighbors	<b>show ospf neighbor</b>
BGP	Display information about BGP neighbors	<b>show bgp neighbor</b>
MPLS	Status of interfaces on which MPLS is running	<b>show mpls interface</b>
	Configured LSPs on the router or switch, as well as all ingress, transit, and egress LSPs	<b>show mpls lsp</b>
	Routes that form a label-switched path	<b>show route label-switched-path</b>
RSVP	Status of interfaces on which RSVP is running	<b>show rsvp interface</b>
	Currently active RSVP sessions	<b>show rsvp session</b>
	RSVP packet and error counters	<b>show rsvp statistics</b>

**Related Documentation**

- [Junos OS Operational Mode Commands That Combine Other Commands on page 50](#)
- [Understanding the Brief, Detail, Extensive, and Terse Options of Junos OS Operational Commands on page 55](#)

## Overview of Navigating the CLI

This topic describes how to navigate the CLI.


- [CLI Command Hierarchy on page 54](#)
- [CLI Configuration Statements on page 54](#)
- [Moving Among Hierarchy Levels on page 54](#)



## CLI Command Hierarchy

CLI commands are organized in a hierarchy. Commands that perform a similar function are grouped together under the same level of the hierarchy. For example, all commands that display information about the system and the system software are grouped under the **show system** command, and all commands that display information about the routing table are grouped under the **show route** command. Figure 10 on page 54 illustrates a portion of the **show** command hierarchy.

Figure 10: CLI Command Hierarchy

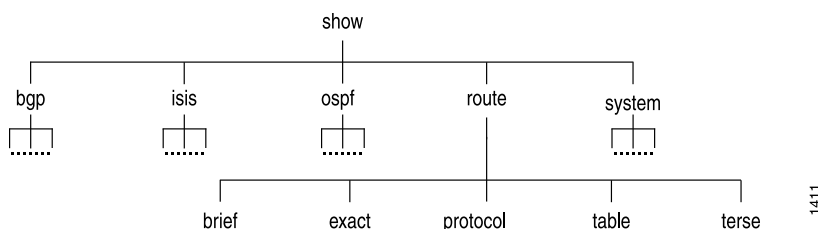

To execute a command, you enter the full command name, starting at the top level of the hierarchy. For example, to display a brief view of your Ethernet switching options for your interfaces, use the command **show ethernet-switching-options interfaces**.

## CLI Configuration Statements

The configuration statement hierarchy has two types of statements: *container statements*, which are statements that contain other statements, and *leaf statements*, which do not contain other statements. All of the container and leaf statements together form the *configuration hierarchy*.

The **protocols** statement is a top-level statement at the trunk of the configuration tree. The **ospf**, **area**, and **interface** statements are all subordinate container statements of a higher statement (they are branches of the hierarchy tree), and the **hello-interval** statement is a leaf on the tree.

## Moving Among Hierarchy Levels

You can use the CLI commands to navigate the levels of the configuration statement hierarchy:

- **edit**— Moves to an existing configuration statement hierarchy or creates a hierarchy and moves to that level.
- **exit**— Moves up the hierarchy to the previous level where you were working. This command is, in effect, the opposite of the **edit** command. Alternatively, you can use the **quit** command. The **exit** and **quit** commands are interchangeable.
- **up**— Moves up the hierarchy one level at a time.
- **top**— Moves directly to the top level of the hierarchy.

### Related Documentation

- [CLI User Interface Overview on page 46](#)
- CLI User Guide



## Understanding the Brief, Detail, Extensive, and Terse Options of Junos OS Operational Commands

The Junos OS operational mode commands can include **brief**, **detail**, **extensive**, or **terse** options. You can use these options to control the amount of information you want to view.

1. Use the ? prompt to list options available for the command. For example:

```
user@host> show interfaces fe-1/1/1 ?
Possible completions:
<[Enter]>          Execute this command
brief              Display brief output
descriptions       Display interface description strings
detail             Display detailed output
extensive           Display extensive output
media              Display media information
snmp-index         SNMP index of interface
statistics         Display statistics and detailed output
terse              Display terse output
|                 Pipe through a command
```

2. Choose the option you wish to use with the command. (See [Figure 11 on page 55](#).)

Figure 11: Command Output Options

Figure 11 displays three examples of command output options for the `show interfaces fe-1/1/1` command in Junos OS operational mode.

**Command output with the **brief** option.**

```
user@host> show interfaces fe-1/1/1 brief
Physical interface: fe-1/1/1, Enabled, Physical link is Down
  Link-level type: Ethernet, MTU: 1514, Speed: 100mbps, Loopback:
  Disabled, Source filtering: Disabled,
  Flow control: Enabled
  Device flags   : Present Running Down
  Interface flags: Hardware-Down SNMP-Traps Internal: 0x4000
  Link flags     : None
```

**Command output with the **terse** option.**

```
user@host> show interfaces fe-1/1/1 terse
Interface      Admin Link Proto  Local      Remote
fe-1/1/1       up    down
```

**Command output with the **extensive** option.**

```
user@host> show interfaces fe-1/1/1 extensive
Physical interface: fe-1/1/1, Enabled, Physical link is Down
  Interface index: 141, SNMP ifIndex: 33, Generation: 24
  Link-level type: Ethernet, MTU: 1514, Speed: 100mbps, Loopback:
  Disabled, Source filtering: Disabled,
  Flow control: Enabled
  Device flags   : Present Running Down
  Interface flags: Hardware-Down SNMP-Traps Internal: 0x4000
  Link flags     : None
  CoS queues     : 4 supported, 4 maximum usable queues
  Hold-times     : Up 0 ms, Down 0 ms
  Current address: 00:90:69:d0:f8:9e, Hardware address: 00:90:69:d0:f8:9e
  Last flapped   : 2007-02-02 09:26:25 PST (2w0d 03:40 ago)
  Statistics last cleared: Never
  Traffic statistics:
    Input bytes : 0          0 bps
    Output bytes : 0          0 bps
    Input packets: 0          0 pps
    Output packets: 0          0 pps
  --- (more) ---
```

- Related Documentation**
- [Overview of Junos OS CLI Operational Mode Commands on page 51](#)
  - [Controlling the Scope of an Operational Mode Command](#)



## Understanding Junos OS CLI Configuration Mode

You can configure all properties of Junos OS, including interfaces, general routing information, routing protocols, and user access, as well as several system hardware properties.

As described in *Understanding the Junos OS CLI Modes, Commands, and Statement Hierarchies*, a router configuration is stored as a hierarchy of statements. In configuration mode, you create the specific hierarchy of configuration statements that you want to use. When you have finished entering the configuration statements, you commit them, which activates the configuration on the router.

You can create the hierarchy interactively or you can create an ASCII text file that is loaded onto the router or switch and then committed.

This topic covers:

- [Configuration Mode Commands on page 57](#)
- [Configuration Statements and Identifiers on page 58](#)
- [Configuration Statement Hierarchy on page 60](#)



## Configuration Mode Commands

Table 22 on page 57 summarizes each CLI configuration mode command. The commands are organized alphabetically.

**Table 22: Summary of Configuration Mode Commands**

Command	Description
<b>activate</b>	Remove the <b>inactive:</b> tag from a statement, effectively reading the statement or identifier to the configuration. Statements or identifiers that have been activated take effect when you next issue the <b>commit</b> command.
<b>annotate</b>	Add comments to a configuration. You can add comments only at the current hierarchy level.
<b>commit</b>	Commit the set of changes to the database and cause the changes to take operational effect.
<b>copy</b>	Make a copy of an existing statement in the configuration.
<b>deactivate</b>	Add the <b>inactive:</b> tag to a statement, effectively commenting out the statement or identifier from the configuration. Statements or identifiers marked as inactive do not take effect when you issue the <b>commit</b> command.
<b>delete</b>	Delete a statement or identifier. All subordinate statements and identifiers contained within the specified statement path are deleted with it.
<b>edit</b>	Move inside the specified statement hierarchy. If the statement does not exist, it is created.
<b>exit</b>	Exit the current level of the statement hierarchy, returning to the level prior to the last edit command, or exit from configuration mode. The <b>quit</b> and <b>exit</b> commands are synonyms.
<b>extension</b>	Manage configurations that are contributed by SDK application packages. Either display or delete user-defined configuration contributed by the named SDK application package. A configuration defined in any native Junos OS package is never deleted by the extension command.
<b>help</b>	Display help about available configuration statements.
<b>insert</b>	Insert an identifier into an existing hierarchy.
<b>load</b>	Load a configuration from an ASCII configuration file or from terminal input. Your current location in the configuration hierarchy is ignored when the load operation occurs.



Table 22: Summary of Configuration Mode Commands (*continued*)

Command	Description
<b>quit</b>	Exit the current level of the statement hierarchy, returning to the level prior to the last edit command, or exit from configuration mode. The <b>quit</b> and <b>exit</b> commands are synonyms.
<b>rename</b>	Rename an existing configuration statement or identifier.
<b>replace</b>	Replace identifiers or values in a configuration.
<b>rollback</b>	Return to a previously committed configuration. The software saves the last 10 committed configurations, including the rollback number, date, time, and name of the user who issued the <b>commit configuration</b> command.
<b>run</b>	Run a top-level CLI command without exiting from configuration mode.
<b>save</b>	Save the configuration to an ASCII file. The contents of the current level of the statement hierarchy (and below) are saved, along with the statement hierarchy containing it. This allows a section of the configuration to be saved, while fully specifying the statement hierarchy.
<b>set</b>	Create a statement hierarchy and set identifier values. This is similar to <b>edit</b> except that your current level in the hierarchy does not change.
<b>show</b>	Display the current configuration.
<b>status</b>	Display the users currently editing the configuration.
<b>top</b>	Return to the top level of configuration command mode, which is indicated by the <b>[edit]</b> banner.
<b>up</b>	Move up one level in the statement hierarchy.
<b>update</b>	Update a private database.
<b>wildcard</b>	Delete a statement or identifier. All subordinate statements and identifiers contained within the specified statement path are deleted with it. You can use regular expressions to specify a pattern. Based on this pattern, you search for items that contain these patterns and delete them.

### Configuration Statements and Identifiers

You can configure router or switch properties by including the corresponding statements in the configuration. Typically, a statement consists of a keyword, which is fixed text, and, optionally, an identifier. An identifier is an identifying name that you can define, such as



the name of an interface or a username, which enables you and the CLI to differentiate among a collection of statements.

Table 23 on page 59 describes top-level CLI configuration mode statements.



**NOTE:** The QFX3500 switch does not support the IS-IS, OSPF, BGP, LDP, MPLS, and RSVP protocols.

**Table 23: Configuration Mode Top-Level Statements**

Statement	Description
<b>access</b>	Configure the Challenge Handshake Authentication Protocol (CHAP). For information about the statements in this hierarchy, see the Junos OS System Basics Configuration Guide.
<b>accounting-options</b>	Configure accounting statistics data collection for interfaces and firewall filters. For information about the statements in this hierarchy, see the Network Management Configuration Guide.
<b>chassis</b>	Configure properties of the router chassis, including conditions that activate alarms and SONET/SDH framing and concatenation properties. For information about the statements in this hierarchy, see the Junos OS System Basics Configuration Guide.
<b>class-of-service</b>	Configure class-of-service parameters. For information about the statements in this hierarchy, see the Junos OS Class of Service Configuration Guide.
<b>firewall</b>	Define filters that select packets based on their contents. For information about the statements in this hierarchy, see the Routing Policy Configuration Guide.
<b>forwarding-options</b>	Define forwarding options, including traffic sampling options. For information about the statements in this hierarchy, see the Junos® OS Network Interfaces.
<b>groups</b>	Configure configuration groups. For information about statements in this hierarchy, see the Junos OS System Basics Configuration Guide.
<b>interfaces</b>	Configure interface information, such as encapsulation, interfaces, virtual channel identifiers (VCIs), and data-link connection identifiers (DLCIs). For information about the statements in this hierarchy, see the Junos® OS Network Interfaces.
<b>policy-options</b>	Define routing policies, which allow you to filter and set properties in incoming and outgoing routes. For information about the statements in this hierarchy, see the Routing Policy Configuration Guide.
<b>protocols</b>	Configure routing protocols, including BGP, IS-IS, LDP, MPLS, OSPF, RIP, and RSVP. For information about the statements in this hierarchy, see the chapters that discuss how to configure the individual routing protocols in the Junos OS Routing Protocols Configuration Guide and the Junos OS MPLS Applications Configuration Guide.



Table 23: Configuration Mode Top-Level Statements (*continued*)


Statement	Description
<b>routing-instances</b>	Configure multiple routing instances. For information about the statements in this hierarchy, see the Junos OS Routing Protocols Configuration Guide.
<b>routing-options</b>	Configure protocol-independent routing options, such as static routes, autonomous system numbers, confederation members, and global tracing (debugging) operations to log. For information about the statements in this hierarchy, see the Junos OS Routing Protocols Configuration Guide.
<b>security</b>	Configure IP Security (IPsec) services. For information about the statements in this hierarchy see the Junos OS System Basics Configuration Guide.
<b>snmp</b>	Configure SNMP community strings, interfaces, traps, and notifications. For information about the statements in this hierarchy, see the Network Management Configuration Guide.
<b>system</b>	Configure systemwide properties, including the hostname, domain name, Domain Name System (DNS) server, user logins and permissions, mappings between hostnames and addresses, and software processes. For information about the statements in this hierarchy, see the Junos OS System Basics Configuration Guide.

For specific information on configuration statements, see the Junos OS configuration guides.

### Configuration Statement Hierarchy

The Junos OS configuration consists of a hierarchy of *statements*. There are two types of statements: *container statements*, which are statements that contain other statements, and *leaf statements*, which do not contain other statements (see [Figure 12 on page 60](#)). All of the container and leaf statements together form the *configuration hierarchy*.

Figure 12: Configuration Mode Hierarchy of Statements

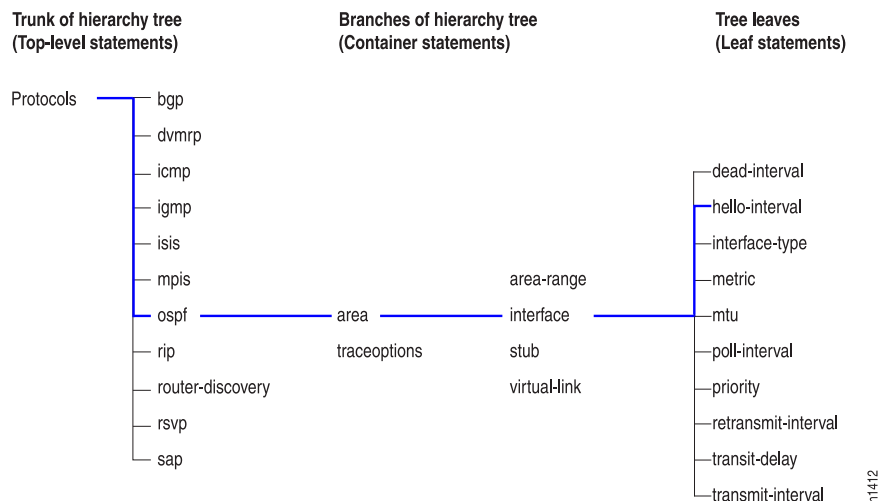



Each statement at the top level of the configuration hierarchy resides at the trunk (or root level) of a hierarchy tree. The top-level statements are container statements, containing other statements that form the tree branches. The leaf statements are the leaves of the hierarchy tree. An individual hierarchy of statements, which starts at the trunk of the hierarchy tree, is called a *statement path*. [Figure 12 on page 60](#) illustrates the hierarchy tree, showing a statement path for the portion of the protocol configuration hierarchy that configures the hello interval on an interface in an OSPF area.

The **protocols** statement is a top-level statement at the trunk of the configuration tree. The **ospf**, **area**, and **interface** statements are all subordinate container statements of a higher statement (they are branches of the hierarchy tree); and the **hello-interval** statement is a leaf on the tree which in this case contains a data value: the length of the hello interval, in seconds.

The CLI represents the statement path shown in [Figure 12 on page 60](#) as **[edit protocols ospf area area-number interface interface-name]** and displays the configuration as follows:

```
protocols {
  ospf {
    area 0.0.0.0 {
      interface so-0/0/0 {
        hello-interval 5;
      }
      interface so-0/0/1 {
        hello-interval 5;
      }
    }
  }
}
```

The CLI indents each level in the hierarchy to indicate each statement's relative position in the hierarchy and generally sets off each level with braces, using an open brace at the beginning of each hierarchy level and a closing brace at the end. If the statement at a hierarchy level is empty, the braces are not printed.

Each leaf statement ends with a semicolon. If the hierarchy does not extend as far as a leaf statement, the last statement in the hierarchy ends with a semicolon.

The configuration hierarchy can also contain “oneliners” at the last level in the hierarchy. Oneliners remove one level of braces in the syntax and display the container statement, its identifiers, the child or leaf statement and its attributes all on one line. For example, in the following sample configuration hierarchy, the line **level 1 metric 10** is a oneliner because the **level** container statement with identifier **1**, its child statement **metric**, and its corresponding attribute **10** all appear on a single line in the hierarchy:

```
[edit protocols]
isis {
  interface ge-0/0/0.0 {
    level 1 metric 10;
  }
}
```



Likewise, in the following example, **dynamic-profile** *dynamic-profile-name* **aggregate-clients;** is a oneliner because the **dynamic-profile** statement, its identifier *dynamic-profile-name*, and leaf statement **aggregate-clients** all appear on one line when you run the **show** command in the configuration mode:

```
[edit forwarding-options]
user@host# show
dhcp-relay {
  dynamic-profile dynamic-profile-name aggregate-clients;
}
```

**Related  
Documentation**

- [Entering and Exiting the Junos OS CLI Configuration Mode](#)

---

## Licenses

- [Junos OS Feature Licenses on page 62](#)
- [Software Features That Require Licenses on the QFX Series on page 63](#)
- [Junos OS License Keys on page 64](#)
- [Generating the License Keys for a Standalone QFX Series Device on page 66](#)
- [Generating the License Keys for a QFabric System on page 67](#)
- [Adding New Licenses \(CLI Procedure\) on page 69](#)
- [Deleting a License \(CLI Procedure\) on page 70](#)
- [Saving License Keys on page 71](#)
- [Verifying Junos OS License Installation on page 71](#)

### Junos OS Feature Licenses

Some Junos OS software features require a license to activate the feature. To enable a licensed feature, you need to purchase, install, manage, and verify a license key that corresponds to each licensed feature. To conform to Junos OS feature licensing requirements, you must purchase one license per feature per device. The presence of the appropriate software license key on your device determines whether you are eligible to configure and use the licensed feature.

To speed deployment of licensed features, Junos OS software implements an honor-based licensing structure and provides you with a 30-day grace period to use a licensed feature without a license key installed. The grace period begins when you configure the feature and your device uses the licensed feature for the first time, but not necessarily when you install the license. After the grace period expires, the system generates system log messages saying that the feature requires a license. To clear the error message and use the licensed feature properly, you must install and verify the required license.

For information about how to purchase software licenses, contact your Juniper Networks sales representative.

**Related  
Documentation**

- [License Enforcement](#)
- [Junos OS License Keys on page 64](#)



- Software Feature Licenses
- [Verifying Junos OS License Installation on page 71](#)

## Software Features That Require Licenses on the QFX Series

The following Junos OS features require an Advanced Feature License (AFL) on QFX Series devices:



**NOTE:** If you try to configure a feature that is not licensed, you will receive syslog messages saying that you are using a feature that is licensable and that you do not possess a license for the feature. If you try to commit configuration changes for a feature that is not licensed, you will receive a commit warning saying that you have exceeded the allowed license limit for the feature.

- Border Gateway Protocol (BGP)
- Intermediate System-to-Intermediate System (IS-IS)
- Fibre Channel support

[Table 24 on page 63](#) lists the licenses you can purchase for each QFX Series software feature.

For information about how to purchase a software license, contact your Juniper Networks sales representative.

**Table 24: Junos OS Feature Licenses and Model Numbers for QFX Series Devices**

Licensed Software Feature	Supported Devices	Number of Licenses Required	Model Number
QFX Series advanced feature license for Border Gateway Protocol (BGP) and Intermediate System-to-Intermediate System (IS-IS)	QFX3500 switch	One per switch	QFX-JSL-EDGE-ADV1
QFX Series advanced feature license for Border Gateway Protocol (BGP)	QFX3100 Director device	One per Node device in a network Node group	QFX-JSL-DRCTR-ADV1
QFX Series advanced feature license for Fibre Channel	QFX3500 switch	One per switch on which fibre channel ports are configured	QFX-JSL-EDGE-FC
QFX Series advanced feature license for Fibre Channel	QFX3100 Director device	One per QFX3500 Node device on which fibre channel ports are configured	QFX-JSL-DRCTR-FC



Table 24: Junos OS Feature Licenses and Model Numbers for QFX Series Devices (*continued*)

Licensed Software Feature	Supported Devices	Number of Licenses Required	Model Number
QFX Series advanced feature license for Fibre Channel - Capacity 16	QFX3100 Director device	One for up to 16 QFX3500 Node devices on which fibre channel ports are configured	QFX-JSL-DRCTR-FC-C16
QFX Series feature license for enabling fabric mode	QFX3500 and QFX3600 device	One per device	QFX3000-JSL-EDGE-FAB
QFX Series feature license for base software for QFX3000-G QFabric system	QFX3100 Director device	One per QFX3000-G QFabric system	QFX3008-JSL-DRCTR-FAB
QFX Series feature license for base software for QFX3000-M QFabric system	QFX3100 Director device	One per QFX3000-M QFabric system	QFX3000M-JSL-DRCTR-FAB

#### Related Documentation

- [Junos OS Feature Licenses on page 62](#)
- [Junos OS License Keys on page 64](#)
- [Generating the License Keys for a Standalone QFX Series Device on page 66](#)
- [Generating the License Keys for a QFabric System on page 67](#)
- [Adding New Licenses \(CLI Procedure\) on page 69](#)
- [Deleting a License \(CLI Procedure\) on page 70](#)
- [Saving License Keys on page 71](#)
- [Verifying Junos OS License Installation on page 71](#)

## Junos OS License Keys

### Licensable Ports on MX5, MX10, and MX40 Routers

Starting with Junos OS Release 12.2, license keys are available to enhance the port capacity on MX5, MX10, and MX40 routers up to the port capacity of an MX80 router. The MX5, MX10, and MX40 routers are derived from the modular MX80 chassis with similar slot and port assignments, and provide all functionality available on an MX80 router, but at a lower capacity. Restricting port capacity is achieved by making a set of MIC slots and ports licensable. MICs without a license are locked, and are unlocked or made usable by installing appropriate upgrade licenses.

The base capacity of a router is identified by the Ideeprom assembly ID (I2C ID), which defines the board type. However, the Junos OS licensing infrastructure allows the use of restricted ports without a license for a grace period of 30 days. After the grace period expires, the router reverts back to the base capacity if no upgrade license is purchased and installed for the locked ports. The I2C ID along with an upgrade license determine the final capacity of an MX5, MX10, or MX40 router.



The MX5, MX10, MX40, and MX80 routers support the following types of MICs:

- A built-in 10-Gigabit Ethernet MIC with four 10-Gigabit Ethernet ports
- Two front-pluggable MICs

A feature ID is assigned to every license upgrade for enhancing port capacity. [Table 25 on page 65](#) displays the chassis types and their associated port capacity, I2C ID, base capacity, feature ID, feature name, and the final capacity after a license upgrade.

**Table 25: Upgrade Licenses for Enhancing Port Capacity**

Chassis Type	Port Capacity	I2C ID	Base Capacity	Feature ID and Feature Name	Upgrade Capacity
MX5	20G	0x556	Slot 1 <ul style="list-style-type: none"> <li>• 1/MIC0</li> </ul>	f1—MX5 to MX10 upgrade	Slot 1 and 2 <ul style="list-style-type: none"> <li>• 1/MIC0</li> <li>• 1/MIC1</li> </ul>
MX10	40G	0x555	Slot 1 and 2 <ul style="list-style-type: none"> <li>• 1/MIC0</li> <li>• 1/MIC1</li> </ul>	f2—MX10 to MX40 upgrade	Slot 2 and first 2 ports on Slot 0 <ul style="list-style-type: none"> <li>• 1/MIC1</li> <li>• First 2 ports on 0/MIC0</li> </ul>
MX40	60G	0x554	Slot 1, SSlot 2 and first 2 ports on Slot 0 <ul style="list-style-type: none"> <li>• 1/MIC0</li> <li>• 1/MIC1</li> <li>• First 2 ports on 0/MIC0</li> </ul>	f3—MX40 to MX80 upgrade	Slot 2 and all ports on Slot 0 <ul style="list-style-type: none"> <li>• 1/MIC1</li> <li>• All 4 ports on 0/MIC0</li> </ul>

When installing an upgrade license for enhancing port capacity on MX5, MX10 and MX40 routers, consider the following:

- To upgrade an MX5 router to MX80 router capacity, licenses for all three features (f1, f2, f3) must be installed. All three features can be provided in a single license key.
- To upgrade an MX10 router to MX40 router capacity, installing a license key with f2 feature is sufficient.
- Non-applicable feature IDs in a license key reject the upgrade license. For example:
  - An f1 feature ID on an MX10 upgrade license key rejects the license.
  - Feature IDs f1 and f2 on an MX40 upgrade license key reject the entire license.

**Related Documentation**

- [Junos OS Feature Licenses on page 62](#)
- License Enforcement
- Software Feature Licenses
- [Verifying Junos OS License Installation on page 71](#)



## Generating the License Keys for a Standalone QFX Series Device

When you purchase a Junos OS software feature license for a QFX Series device, you receive an e-mail containing an authorization code for the feature license from Juniper Networks. You can use the authorization code to generate a unique license key (a combination of the authorization code and the device's serial number) for the device, and then add the license key on the device.

Before generating the license keys for a device:

- Purchase the required licenses for the device. See “[Software Features That Require Licenses on the QFX Series](#)” on page 63.
- Note down the authorization code in the e-mail you received from Juniper Networks when you purchased the license.
- Determine the serial number of the device. For instructions, see [Locating the Serial Number on a QFX3500 Device or Component](#).

To generate the license keys for a device:

1. In a browser, log in to the Juniper Networks License Management System at <https://www.juniper.net/lcrs/license.do>.

The Manage Product Licenses page appears.



**NOTE:** To access the licensing site, you must have a service contract with Juniper Networks and an access account. If you need help obtaining an account, complete the registration form at the Juniper Networks website <https://www.juniper.net/registration/Register.jsp>.

2. On the Generate Licenses tab, select **QFX Series Product** from the drop-down list, and click **Go**.

The Generate Licenses - QFX Series Product page appears.

3. Select the **QFX Series Product Device** option button, and click **Continue**.

The Generate Licenses - QFX Series Product Devices page appears.

4. In the **Device Serial Number** field, enter the serial number for the device.
5. In the **Authorization Code** field, enter the authorization code in the e-mail you received from Juniper Networks when you purchased the license.
6. (Optional) If you want to enter another authorization code for the same device, click **Enter More Authorization Codes** to display a new authorization code field. Enter the authorization code in this field.
7. Click **Confirm**.

The Confirm License Information page appears, displaying a summary of the information you submitted to the License Management System.

8. Review the information to ensure everything is correct and then click **Generate License**.



The Generate Licenses - QFX Series Product Devices page appears, displaying a summary of your license keys, including a link that displays the details of your new license keys.

9. Select the file format in which you want to obtain your new license keys.
10. Select the delivery method you want to use to obtain your new license keys.

To download the license keys:

- Select the **Download to this computer** option button, and click **OK**.

To e-mail the license keys:

- Select the **Send e-mail to e-mail ID** option button, and click **OK**.

#### Related Documentation

- [Software Features That Require Licenses on the QFX Series](#) on page 63
- [Adding New Licenses \(CLI Procedure\)](#) on page 69
- Locating the Serial Number on a QFX3500 Device or Component

## Generating the License Keys for a QFabric System

When you purchase a Junos OS software feature license for a QFabric system, you receive an e-mail containing an authorization code for the feature license from Juniper Networks. You can use the authorization code to generate a unique license key (a combination of the authorization code and the QFabric system ID ) for the QFabric system, and then add the license key on the QFabric system.

Before generating the license keys for a QFabric system:

- Purchase the required licenses for the QFabric system. See [“Software Features That Require Licenses on the QFX Series”](#) on page 63.
- Note down the authorization code in the e-mail you received from Juniper Networks when you purchased the license.
- Perform the initial setup of the QFabric system on the Director group. See [Performing the QFabric System Initial Setup on a QFX3100 Director Group](#).
- Log in to the QFabric system, issue the [show version](#) command, and note down the software serial number and QFabric system ID for the QFabric system.

```
user@qfabric> show version
Hostname: qfabric
Model: qfx3000-g
Serial Number: qfsn-0123456789
QFabric System ID: f158527a-f99e-11e0-9fbd-00e081c57cda
JUNOS Base Version [12.2I20111018_0215_dc-builder]
```



To generate the license keys for a QFabric system:

1. In a browser, log in to the Juniper Networks License Management System at <https://www.juniper.net/lcrs/license.do>.

The Manage Product Licenses page appears.



**NOTE:** To access the licensing site, you must have a service contract with Juniper Networks and an access account. If you need help obtaining an account, complete the registration form at the Juniper Networks website <https://www.juniper.net/registration/Register.jsp>.

2. On the Generate Licenses tab, select **QFX Series Product** from the drop-down list, and click **Go**.

The Generate Licenses - QFX Series Product page appears.

3. Select the **QFX Series Product Fabric** option button, and then click **Continue**.

The Generate Licenses - QFX Series Product Fabrics page appears.

4. In the **Software Serial No** field, enter the software serial number for the QFabric system.
5. In the **QFabric System ID** field, enter the QFabric system ID for the QFabric system.
6. In the **Authorization Code** field, enter the authorization code in the e-mail you received from Juniper Networks when you purchased the license.
7. (Optional) If you want to enter another authorization code for the same device, click **Enter More Authorization Codes** to display a new authorization code field. Enter the authorization code in this field.
8. Click **Confirm**.

The Confirm License Information page appears, displaying a summary of the information you submitted to the License Management System.

9. Review the information to ensure everything is correct and then click **Generate License**.

The Generate Licenses - QFX Series Product Fabrics page appears, displaying a summary of your license keys, including a link that displays the details of your new license keys.

10. Select the file format in which you want to obtain your new license keys.
11. Select the delivery method you want to use to obtain your new license keys.



To download the license keys:

- Select the **Download to this computer** option button, and click **OK**.

To e-mail the license keys:

- Select the **Send e-mail to e-mail ID** option button, and click **OK**.

#### Related Documentation

- [Software Features That Require Licenses on the QFX Series on page 63](#)
- [Performing the QFabric System Initial Setup on a QFX3100 Director Group](#)
- [Adding New Licenses \(CLI Procedure\) on page 69](#)
- [show version on page 1085](#)

### Adding New Licenses (CLI Procedure)

Before adding new licenses, complete the following tasks:

- Purchase the required licenses.
- Establish basic network connectivity with the router or switch. For instructions on establishing basic connectivity, see the *Getting Started Guide* or *Quick Start Guide* for your device.

To add a new license key to the device using the CLI:

1. From the CLI operational mode, enter one of the following CLI commands:

- To add a license key from a file or URL, enter the following command, specifying the filename or the URL where the key is located:

```
user@host> request system license add filename | url
```

- To add a license key from the terminal, enter the following command:

```
user@host> request system license add terminal
```

2. When prompted, enter the license key, separating multiple license keys with a blank line.

If the license key you enter is invalid, an error appears in the CLI output when you press Ctrl+d to exit license entry mode.





**NOTE:** If the router has two Routing Engines, add the new license on each Routing Engine separately. This ensures that the license key is enabled on the backup Routing Engine during changeover of mastership between the Routing Engines.

To add a new license key to a router with dual Routing Engines:

1. After adding the new license key on the master Routing Engine, use the `request chassis routing-engine master switch` command to have the backup Routing Engine become the master Routing Engine.
2. Log in to the active Routing Engine and add the new license key, repeating the same process.

3. Go on to [“Verifying Junos OS License Installation” on page 71](#).



**NOTE:** Adding a license key to the router or switch might be delayed if a kernel resynchronization operation is in progress at that time. The following message is displayed on the CLI when the license-adding operation is about to be delayed:

A kernel re-sync operation is in progress. License update may take several minutes to complete.

#### Related Documentation

- [Deleting a License \(CLI Procedure\) on page 70](#)
- [Junos OS Feature Licenses on page 62](#)
- [Verifying Junos OS License Installation on page 71](#)
- [request system license add on page 336](#)

## Deleting a License (CLI Procedure)

Before deleting a license, establish basic network connectivity with the router or switch. For instructions on establishing basic connectivity, see the *Getting Started Guide* or *Quick Start Guide* for your router or switch.

To delete a license key from a device using the CLI:

1. From the CLI operational mode, enter the following command for each license, specifying the license ID. You can delete only one license at a time.

```
user@host> request system license delete license-id
```

2. Go on to [“Verifying Junos OS License Installation” on page 71](#).





**NOTE:** Deleting a license key from the router or switch might be delayed if a kernel resynchronization operation is in progress at that time. The following message is displayed on the CLI when the license-deleting operation is about to be delayed:

A kernel re-sync operation is in progress. License update may take several minutes to complete.

#### Related Documentation

- [Adding New Licenses \(CLI Procedure\) on page 69](#)
- [Saving License Keys on page 71](#)
- [Junos OS Feature Licenses on page 62](#)
- [Verifying Junos OS License Installation on page 71](#)
- [request system license delete on page 337](#)

## Saving License Keys

Before saving a license, establish basic network connectivity with the router or switch. For instructions on establishing basic connectivity, see the *Getting Started Guide* or *Quick Start Guide* for your router or switch.

To save the licenses installed on a device to a file using the CLI:

1. From the CLI operational mode, enter one of the following CLI commands:

- To save the installed license keys to a file or URL, enter the following command:

```
user@host> request system license save filename | url
```

For example, the following command saves the installed license keys to a file named **license.config**:

- To save a license key from the terminal, enter the following command:

```
user@host> request system license save ftp://user@host/license.config
```

2. Go on to “[Verifying Junos OS License Installation](#)” on page 71.

#### Related Documentation

- [Adding New Licenses \(CLI Procedure\) on page 69](#)
- [Deleting a License \(CLI Procedure\) on page 70](#)
- [Junos OS Feature Licenses on page 62](#)
- [Verifying Junos OS License Installation on page 71](#)

## Verifying Junos OS License Installation

To verify Junos OS license management, perform the following tasks:

- [Displaying Installed Licenses on page 72](#)
- [Displaying License Usage on page 73](#)



## Displaying Installed Licenses

**Purpose** Verify that the expected licenses are installed and active on the router or switch.

**Action** From the CLI, enter the **show system license** command.

### Sample Output

```
user@host> show system license
License usage:

```

Feature name	Licenses used	Licenses installed	Licenses needed	Expiry
subscriber-acct	0	1	0	permanent
subscriber-auth	0	1	0	permanent
subscriber-addr	0	1	0	permanent
subscriber-vlan	0	1	0	permanent
subscriber-ip	0	1	0	permanent
scale-subscriber	0	1000	0	permanent
scale-l2tp	0	1000	0	permanent
scale-mobile-ip	0	1000	0	permanent

```

Licenses installed:
License identifier: E000185416
License version: 2
Features:
  subscriber-acct - Per Subscriber Radius Accounting
                  permanent
  subscriber-auth - Per Subscriber Radius Authentication
                  permanent
  subscriber-addr - Address Pool Assignment
                  permanent
  subscriber-vlan - Dynamic Auto-sensed Vlan
                  permanent
  subscriber-ip   - Dynamic and Static IP
                  permanent

```

**Meaning** The output shows a list of the license usage and a list of the licenses installed on the router or switch. Verify the following information:

- Each license is present. Licenses are listed in ascending alphanumeric order by license ID.
- The state of each license is **permanent**.



**NOTE:** A state of **invalid** indicates that the license key is not a valid license key. Either it was entered incorrectly or it is not valid for the specific device.

- The feature for each license is the expected feature. The features enabled are listed by license. An all-inclusive license has all features listed.
- All configured features have the required licenses installed. The Licenses needed column must show that no licenses are required.



### Displaying License Usage

**Purpose** Verify that the licenses fully cover the feature configuration on the router or switch.

**Action** From the CLI, enter the **show system license usage** command.

### Sample Output

```
user@host> show system license usage
```

	Licenses	Licenses	Licenses	Expiry
Feature name	used	installed	needed	
subscriber-addr	1	0	1	29 days
scale-subscriber	0	1000	0	permanent
scale-12tp	0	1000	0	permanent
scale-mobile-ip	0	1000	0	permanent

**Meaning** The output shows any licenses installed on the router or switch and how they are used. Verify the following information:

- Any configured licenses appear in the output. The output lists features in ascending alphabetical order by license name. The number of licenses appears in the third column. Verify that you have installed the appropriate number of licenses.
- The number of licenses used matches the number of configured features. If a licensed feature is configured, the feature is considered used. The sample output shows that the subscriber address pooling feature is configured.
- A license is installed on the router or switch for each configured feature. For every feature configured that does not have a license, one license is needed.

For example, the sample output shows that the subscriber address feature is configured but that the license for the feature has not yet been installed. The license must be installed within the remaining grace period to be in compliance.







## CHAPTER 4

# Installation

- [Software Installation on page 75](#)

## Software Installation

---

- [Junos OS Package Names on page 75](#)
- [Configuring Zero Touch Provisioning on page 77](#)
- [Performing a Nonstop Software Upgrade on the QFabric System on page 80](#)
- [Performing a Recovery Installation on a QFX3008-I, QFX3600-I, QFX3600, or QFX3500 Device on page 85](#)
- [Performing a QFabric System Recovery Installation on the Director Group on page 87](#)
- [Recovering from a Failed Software Installation on page 93](#)
- [Software Installation Overview on page 94](#)
- [Upgrading Jloader Software on QFX Series Devices on page 95](#)
- [Upgrading Software on QFX3500 and QFX3600 Standalone Switches on page 107](#)
- [Upgrading Software on a QFabric System on page 109](#)
- [Upgrading Software Using Automatic Software Download on page 114](#)
- [Verifying Autoinstallation Status on page 115](#)
- [Verifying That Automatic Software Download Is Working Correctly on page 115](#)

## Junos OS Package Names

You upgrade the Juniper Networks Junos OS on the QFX Series by copying a software package to your switch or another system on your local network and then installing the new software package on the switch.

A software package name is in the following format:



NOTE: A signed domestic package is used as an example only. Other types of software packages might be available in future releases.

***package-name-m.nZx.y-domestic-signed.tgz***



where:

- **package-name** is the name of the package—for example, **jinstall-qfx**.
- **m.n** is the software release, with **m** representing the major release number and **n** representing the minor release number—for example, **11.1**.
- **Z** indicates the type of software release, where **R** indicates released software and **B** indicates beta-level software.
- **x.y** represents the maintenance software release, with **x** representing the maintenance software release number and **y** representing the maintenance software spin number—for example, **1.5**.

A sample switch software package name is:

`jinstall-qfx-11.1R1.5-domestic-signed.tgz`

**Related  
Documentation**

- [Upgrading Software on QFX3500 and QFX3600 Standalone Switches on page 107](#)
- [Upgrading Software on a QFabric System on page 109](#)
- [Software Installation Overview on page 94](#)



## Configuring Zero Touch Provisioning

Zero Touch Provisioning allows you to provision new switches in your network automatically, without manual intervention. When you physically connect a switch to the network and boot it with a default configuration, it attempts to upgrade the Junos OS software automatically and autoinstall a configuration file from the network.

The switch uses information that you configure on a Dynamic Host Control Protocol (DHCP) server to determine whether to perform these actions and to locate the necessary software image and configuration files on the network. If you do not configure the DHCP server to provide this information, the switch boots with the preinstalled software and default configuration.



**NOTE:** If you have both DHCP and ZTP enabled, the switch broadcasts a DHCP DISCOVER packet every six minutes. If a DHCP server on the network responds with a DHCP ACK packet with DHCP vendor options set with the necessary values to initiate ZTP, then ZTP proceeds.

To disable broadcasting the DHCP DISCOVER packet every six minutes, without performing the ZTP process, manually delete the `auto-image-upgrade` statement located in the `[edit chassis]` hierarchy. If ZTP completes without errors, the `auto-image-upgrade` statement is automatically deleted.



**NOTE:** For detailed information regarding the DHCP and DHCP options, refer to RFC2131 (<http://www.ietf.org/rfc/rfc2131.txt>) and RFC2132 ([www.ietf.org/rfc/rfc2132.txt](http://www.ietf.org/rfc/rfc2132.txt)). Also, this document refers to Internet Systems Consortium (ISC) DHCP version 4.2. For more information regarding this version, refer to <http://www.isc.org/software/dhcp/documentation>.

Before you begin:

- Ensure that the switch has access to the following network resources:
  - The DHCP server provides the location of the software image and configuration files on the network

Refer to your DHCP server documentation for configuration instructions.

- The File Transfer Protocol (anonymous FTP), Hypertext Transfer Protocol (HTTP), Trivial File Transfer Protocol (TFTP) server on which the software image and configuration files are stored



**NOTE:** Although TFTP is supported, we recommend that you use FTP or HTTP instead, because these transport protocols are more reliable.

- A Domain Name System (DNS) server to perform reverse DNS lookup



- (Optional) An NTP server to perform time synchronization on the network
- (Optional) A system log (syslog) server to manage system log messages and alerts
- Locate and record the MAC address printed on the switch chassis.



**CAUTION:** You cannot commit a configuration while the switch is performing the software update process. If you commit a configuration while the switch is performing the configuration file autoinstallation process, the process stops, and the configuration file is not downloaded from the network.

To configure Zero Touch Provisioning for a switch:

1. Make sure the switch has the default factory configuration installed.  
Issue the **request system zeroize** command on the switch that you want to provision.
2. Download the software image file and the configuration file to the FTP, HTTP, TFTP, server that the switch will download these files from.

You can download either one or both of these files.

3. Configure the DHCP server to provide the necessary information to the switch.

Configure IP address assignment.

You can configure dynamic or static IP address assignment for the switch's management address. To determine the switch's management MAC address for static IP address mapping, add 1 to the last byte of the switch's MAC address, which you noted before you began this procedure.

4. Define the format of the vendor-specific information for DHCP option 43 in the `dhcpd.conf` file.

Here is an example of an ISC DHCP 4.2 server `dhcpd.conf` file:

```
option space NEW_OP; option NEW_OP.image-file-name code 0 = text;
option NEW_OP.config-file-name code 1 = text;
option NEW_OP.image-file-type code 2 = text;
option NEW_OP.transfer-mode code 3 = text;
option NEW_OP-encapsulation code 43 = encapsulate NEW_OP;
```

5. Configure the following DHCP option 43 suboptions:

- Suboption 00: The name of the software image file to install

```
option NEW_OP.image-file-name
"/dist/images/jinstall-ex-4200-13.2R1.1-domestic-signed.tgz";
```

- Suboption 01: The name of the configuration file to install

```
option NEW_OP.config-file-name "/dist/config/jn-switch35.config";
```

- Suboption 02: The symbolic link to the software image file to install

```
option NEW_OP.image-file-type "symlink";
```





**NOTE:** If you do not specify suboption 2, the Zero Touch Provisioning process handles the software image as a filename, not a symbolic link.

- Suboption 03: The transfer mode that the switch uses to access the TFTP/FTP/HTTP server

```
option NEW_OP.transfer-mode "ftp";
```



**NOTE:** If suboption 03 is not configured, TFTP becomes the transfer mode by default.

6.



**NOTE:** You must configure either option 150 or option 66. If you configure both option 150 and option 66, option 150 takes precedence, and option 66 is ignored.

Configure DHCP option 150 to specify the IP address of the FTP, HTTP, or TFTP server.

```
option option-150 "10.100.31.71";
```

7. Configure DHCP option 66 to specify the IP address of the FTP, HTTP, or TFTP server.

```
option tftp-server-name "10.100.31.71";
```

8. (Optional) Configure DHCP option 7 to specify one or more system log (syslog) servers.

```
option log-servers 10.100.31.72;
```

9. (Optional) Configure DHCP option 42 to specify one or more NTP servers.

```
option ntp-servers 10.100.31.73;
```

10. (Optional) Configure DHCP option 12 to specify the hostname of the switch.

```
option hostname "jn-switch35";
```

The following sample configuration shows the DHCP options you just configured:

```
host jn-switch35 {
  hardware ethernet ac:4b:c8:29:5d:02;
  fixed-address 10.100.31.36;
  option tftp-server-name "10.100.31.71";
  option host-name "jn-switch35";
  option log-servers 10.100.31.72;
  option ntp-servers 10.100.31.73;
  option NEW_OP.image-file-name
    "/dist/images/jinstall-ex-4200-13.2R1.1-domestic-signed.tgz";
  option NEW_OP.transfer-mode "ftp";
  option NEW_OP.config-file-name "/dist/config/jn-switch35.config";
}
```

Based on the DHCP options you just configured, the following statements are appended to the Junos OS configuration file (for example, **jn-switch35.config**):

```
system {
```



```
host-name jn-switch35;
syslog {
  host 10.100.31.72 {
    any any;
  }
}
ntp {
  server 10.100.31.73;
}
}
```

11. Connect the switch to the network that includes the DHCP server and the FTP, HTTP, or TFTP, server.
12. Boot the switch with the default configuration.
13. Monitor the ZTP process by looking at the following log files:
  - /var/log/dhcp\_logfile
  - /var/log/tftp\_logfile

**Related Documentation**

- [Understanding Zero Touch Provisioning on page 38](#)
- [NTP Time Server and Time Services Overview on page 33](#)
- [Understanding DHCP Services for Switches on page 39](#)
- [Reverting to the Default Factory Configuration by Using the request system zeroize Command on page 149](#)

## Performing a Nonstop Software Upgrade on the QFabric System

Nonstop software upgrade enables you to upgrade a QFabric system with minimal packet loss and maximum uptime. This feature introduces several high availability improvements to the QFabric system software upgrade process, including:

- Upgrading members of a Director group or Node group one at a time so that one device in the group is always operational
- Switching mastership of Routing Engine processes to the backup Director device before upgrading the master Director device
- Rebooting Interconnect devices and fabric control Routing Engines one at a time, so that one Interconnect device or one fabric control Routing Engine is always operational
- Switching mastership of a Node group to the backup Node device before upgrading the master Node device
- Specifying an upgrade group if you want all Node devices in a Node group to be upgraded in parallel (which shortens the time of the upgrade)
- Rebooting devices automatically as part of the nonstop upgrade process

When performing a nonstop upgrade, start with the Director group upgrade, then issue the fabric upgrade, and end with the Node group upgrades.





**NOTE:** Because there is no redundancy for Node groups containing a single Node device, traffic loss occurs when the device reboots during the upgrade. For node-groups defined with two node-devices, both must be online in order for upgrade to succeed.



**NOTE:** Before you install the software, we recommend that you back up your current configuration files by issuing the `request system software configuration-backup` command.



**NOTE:** Before you can perform a nonstop software upgrade in your QFabric system, you must first upgrade your system to Junos OS Release 12.2 by using a conventional upgrade method such as issuing the `request system software add component all` command.

This topic describes the following tasks:

- [Backing Up the Current Configuration Files on page 81](#)
- [Downloading Software Files Using a Browser on page 81](#)
- [Retrieving Software Files for Download on page 83](#)
- [Performing a Nonstop Software Upgrade for Director Devices in a Director Group on page 83](#)
- [Performing a Nonstop Software Upgrade for Interconnect Devices and Other Fabric-Related Components on page 83](#)
- [\(Optional\) Creating Upgrade Groups for Node Groups on page 84](#)
- [Performing a Nonstop Software Upgrade on a Node Group on page 84](#)

### Backing Up the Current Configuration Files

To back up your current configuration files:

```
user@qfabric> request system software configuration-backup path
```

Back up the configuration files to a local directory, remote server, or removable drive (for example, an external USB flash drive).

For example:

```
user@qfabric> request system software configuration-backup/media/USB/
```

### Downloading Software Files Using a Browser



**NOTE:** To access the download site, you must have a service contract with Juniper Networks and an access account. If you need help obtaining an account, complete the registration form at the Juniper Networks website <https://www.juniper.net/registration/Register.jsp>.



To download the software package:

1. In a browser, go to <http://www.juniper.net/support/downloads/junos.html>.

The Junos Platforms Download Software page appears.

2. In the QFX Series section, select the Qfabric system for which you want to download software.

The Software Download page for the selected QFabric system appears.

3. Select the number of the software version that you want to download in the Release: pull-down window to the right of the tabs on the Download Software page.
4. Select the **Software** tab and then select the install package you want to download in the Install Package section.

A login screen appears.

5. Select the **Software** tab and then select the complete install package you want to download in the QFabric System Install Package and Media section.

A login screen appears.

6. Enter your user ID and password and press **Enter**.
7. Read the End User License Agreement, select the **I agree** option button, and then click **Proceed**.
8. Save the **jinstall-qfabric-version.rpm** file on your computer.



### Retrieving Software Files for Download

Retrieve the software from the location in which you downloaded it. To do this, issue the **request system software download** command. The software package is copied from where you downloaded it and is placed locally on the QFabric system.

- To retrieve the software:

```
user@qfabric> request system software download /path/package-name
```

For example:

```
user@qfabric> request system software download
ftp://server/files/jinstall-qfabric-12.2X50-D10.3.rpm
```

### Performing a Nonstop Software Upgrade for Director Devices in a Director Group



**NOTE:** If you reboot any Node groups or Interconnect devices after you perform a nonstop upgrade on the Director group, these devices are upgraded to the same version of software that is running on the Director group.

To upgrade the software on the Director devices in a Director group:

- Issue the **request system software nonstop-upgrade director-group package-name** command.

For example:

```
user@qfabric> request system software nonstop-upgrade director-group
jinstall-qfabric-12.2X50-D10.3.rpm
```

### Performing a Nonstop Software Upgrade for Interconnect Devices and Other Fabric-Related Components

Before you perform a nonstop upgrade on the Interconnect devices and other fabric-related components, verify that both Director devices in the Director group are online. Both Director devices must be online before you attempt to perform a nonstop upgrade. To verify that both Director devices are online, issue the **show fabric administration inventory director-group status** command.

To install the software on the Interconnect device and other components in the fabric:

- Issue the **request system software nonstop-upgrade fabric package-name** command.

For example:

```
user@qfabric> request system software nonstop-upgrade fabric
jinstall-qfabric-12.2X50-D10.3.rpm
```



### (Optional) Creating Upgrade Groups for Node Groups

Upgrade groups enable two or more Node devices in a Node group, or an entire Node group, to be rebooted at the same time. If you do not create an upgrade group, the Node devices are upgraded one at a time. Before performing a nonstop upgrade on a Node group, create an upgrade group and include the devices you want to reboot at the same time.



**NOTE:** If you add Node devices that have links to the same link aggregation group (LAG), there might be traffic loss.

- Create the upgrade group by issuing the **set chassis node-group node-group-name nssu upgrade-group upgrade-group-name node-devices** command at the [edit chassis] hierarchy.

For example:

```
user@qfabric# set chassis node-group nodegroup1 nssu upgrade-group upgrade1 node-devices
[ node1 node2 ]
```

### Performing a Nonstop Software Upgrade on a Node Group

When you perform a nonstop software upgrade on a network Node group, the Node devices in the network Node group are upgraded in a serial fashion except when upgrade groups are configured. If you perform a nonstop upgrade on a redundant server Node group, both Node devices must be online for a successful upgrade. If one of the Node devices is no longer available, remove it from the configuration before you perform the nonstop software upgrade. If you perform a nonstop upgrade on a Node group with only one Node device, traffic loss occurs while the Node device is rebooting.



**NOTE:** You can upgrade multiple Node groups with this command. However, if more than one Node group is specified, there may be traffic loss depending on the topology of the network.

To install software on a Node group:

- Issue the **request system software nonstop-upgrade node-group node-group-name package-name** command.

To perform a nonstop upgrade on one Node group:

```
user@qfabric> request system software nonstop-upgrade node-group nodegroup1
jinstall-qfabric-12.2X50-D10.3.rpm
```

To perform a nonstop upgrade on more than one Node group:

```
user@qfabric> request system software nonstop-upgrade node-group [nodegroup1
nodegroup2 nodegroup3] jinstall-qfabric-12.2X50-D10.3.rpm
```

#### Related Documentation

- [Configuring Graceful Restart for QFabric Systems on page 1777](#)
- [Understanding Nonstop Software Upgrade for QFabric Systems on page 1770](#)



- [Verifying Nonstop Software Upgrade for QFabric Systems on page 1868](#)
- [request system software nonstop-upgrade on page 363](#)

## Performing a Recovery Installation on a QFX3008-I, QFX3600-I, QFX3600, or QFX3500 Device

If Junos OS on your device is damaged in some way that prevents the software from loading correctly, you may need to perform a recovery installation using an emergency boot device (for example, a USB flash drive) to restore the default factory installation. Once you have recovered the software, you need to restore the device configuration. You can either create a new configuration as you did when the device was shipped from the factory, or if you saved the previous configuration, you can simply restore that file to the device.

If at all possible, you should try to perform the following steps before you perform the recovery installation:

1. Ensure that you have an emergency boot device to use during the installation. See [“Creating an Emergency Boot Device for a QFX Series Device” on page 140](#) for information on how to create an emergency boot device.
2. Copy the existing configuration in the file `/config/juniper.conf.gz` from the device to a remote system, such as a server, or to an emergency boot device. For extra safety, you can also copy the backup configurations (the files named `/config/juniper.conf.n`, where *n* is a number from 0 through 9) to a remote system or to an emergency boot device.



**WARNING:** The recovery installation process completely overwrites the entire contents of the internal flash storage.

3. Copy any other stored files to a remote system as desired.

To reinstall Junos OS:

1. Insert the emergency boot device into the QFX Series device.
2. Reboot the QFX Series device.



**NOTE:** Do not power off the device if it is already on.

```
[edit system]
user@device> request system reboot
```

If you do not have access to the CLI, power cycle the QFX Series device.

The emergency boot device (external USB install media) is detected. At this time, you can load the Junos OS from the emergency boot device onto the internal flash storage.

3. The software prompts you with the following options:



```
External USB install media detected.
You can load Junos from this media onto an internal drive.
Press 'y' to proceed, 'f' to format and install, or 'n' to abort.
Do you wish to continue ([y]/f/n)? f
```

4. Type **f** to format the internal flash storage and install the Junos OS on the emergency boot device onto the internal flash storage.

If you do not want to format the internal flash storage, type **y**.

The following messages are displayed:

```
Installing packages from external USB drive da1
Packages will be installed to da0, media size: 8G
```

```
Processing format options
Fri September 4 01:18:44 UTC 2012
```

```
-- IMPORTANT INFORMATION --
Installer has detected settings to format system boot media.
This operation will erase all data from your system.
```

```
Formatting installation disk .. this will take a while, please wait
Disabling platform watchdog - threshold 12 mins
```

```
Determining installation slice
Fri September 4 01:27:07 UTC 2012
```

5. The device copies the software from the emergency boot device, occasionally displaying status messages. Copying the software can take up to 12 minutes.

When the device is finished copying the software, you are presented with the following prompt:

```
*** Fri September 4 01:19:00 UTC 2012***
Installation successful..
Please select one of the following options:
Reboot to installed Junos after removing install media (default) ... 1
Reboot to installed Junos by disabling install media ..... 2
Exit to installer debug shell ..... 3
Install Junos to alternate slice ..... 4
Your choice: 4
NOTE: System installer will now install Junos to alternate slice
Do not power off or remove the external installer media or
interrupt the installation mechanism.
```

6. Select **4** to install Junos OS to the alternate slice of the partition, and then press Enter.
7. Remove the emergency boot device when prompted and then press Enter. The device then reboots from the internal flash storage on which the software was just installed. When the reboot is complete, the device displays the login prompt.
8. Create a new configuration as you did when the device was shipped from the factory, or restore the previously saved configuration file to the device.

#### Related Documentation

- [Creating an Emergency Boot Device for a QFX Series Device on page 140](#)



## Performing a QFabric System Recovery Installation on the Director Group

If the software on your QFabric system is damaged in some way that prevents the software from loading correctly, or you need to upgrade the software on your QFabric system, you may need to perform a recovery installation on the Director group.

If possible, perform the following steps before you perform the recovery installation:

1. Ensure that you have an emergency boot device (for example, an external USB flash drive) for each of your Director devices to use during the recovery installation.

You can either use the external USB flash drive containing the software supplied by Juniper Networks, or you can use an external USB flash drive supplied by Juniper Networks on which you install the QFabric system install media.

2. Because the recovery installation process completely overwrites the entire contents of the Director device, make sure you back up any configuration files and initial setup information on a different external USB flash drive before you begin a recovery installation. You will need to restore this information as part of recovery process.

Use the **request system software configuration-backup** command to back up your configuration files and initial setup information:

```
user@switch> request system software configuration-backup path
```



**NOTE:** To recover the Director group, you must upgrade both Director devices in parallel. If you are recovering only one Director device in a Director group, and the software version will remain the same between the two Director devices, make sure that the other Director device is powered on and operational. If the software version of the Director device you are recovering will be different, make sure that the other Director device is powered off and is not operational.

- (Optional) [Creating an Emergency Boot Device Using a Juniper Networks External Blank USB Flash Drive on page 88](#)
- [Performing a Recovery Installation Using a Juniper Networks External USB Flash Drive with Preloaded Software on page 89](#)



### (Optional) Creating an Emergency Boot Device Using a Juniper Networks External Blank USB Flash Drive

---

If you do not have an external USB flash drive preloaded with the software from Juniper Networks to use as an emergency boot device, you can create your own, using a blank external USB flash drive provided by Juniper Networks. Download the install media from the Juniper Networks Support website onto your UNIX workstation, uncompress and untar the software, and then burn the software image onto your Juniper Networks external USB (4-gigabyte) flash drive. Make sure you create two emergency boot devices, one for each Director device, so you can perform a recovery installation in parallel.

1. In a browser, go to <http://www.juniper.net/support/downloads/junos.html>.

The **Junos Platforms Download Software** page appears.

2. In the **QFX Series** section of the **Junos Platforms - Download Software** download page, select the QFX Series platform software you want to download.
3. Select the number of the software version that you want to download in the **Release:** pull-down window to the right of the tabs on the **Download Software** page.
4. Click the **Software** tab and select the complete install media you want to download in the **QFabric System Install Media** section.

A login screen appears.

5. Enter your name and password and press **Enter**.
6. Read the End User License Agreement, click the **I agree** radio button, and then click **Proceed**.
7. Log in and save the install media file to your UNIX workstation.
8. Use FTP to access the UNIX workstation where the install media resides.  
**ftp ftp://hostname/pathname install-media-qfabric-<version>.img.tgz**
9. When prompted, enter your username and password.
10. Make sure you are in binary mode by entering **binary** at the prompt.

**binary**

11. Use the **get** command to transfer the installation package from the FTP host to your UNIX workstation.

**get install-media-qfabric-<version>.img.tgz**

12. Close the FTP session:

**bye**

13. Untar the *install-media-qfabric-<version>.img.tgz* file on your UNIX workstation.

**tar -xvzf install-media-qfabric-11.3X30.6.img.tgz**

14. Insert a blank external USB (4-gigabyte) flash drive supplied by Juniper Networks into your UNIX workstation.

15. Burn the software image you just downloaded to your UNIX workstation onto your external USB flash drive using the **dd** command:

**dd if=install-media-qfabric-11.3X30.6.img of=/dev/sdb bs=16k**



```
250880+0 records in
250880+0 records out
4110417920 bytes (4.1 GB) copied, 5.10768 seconds, 805 MB/s
```

16. Perform the steps in [“Performing a Recovery Installation Using a Juniper Networks External USB Flash Drive with Preloaded Software” on page 89](#) to continue with the recovery installation.

### Performing a Recovery Installation Using a Juniper Networks External USB Flash Drive with Preloaded Software

This procedure describes how to perform a recovery installation using an external USB flash drive that contains Junos OS software.



**NOTE:** Since the recovery installation process completely overwrites the entire contents of the Director device, you will need to restore the required configuration files and initial setup information. The following procedure assumes you previously saved these backup files with the **request system software configuration-backup** command. Ensure that you have these backup files available on an external USB flash drive before you perform the following steps.

1. Insert the external USB flash drive into the Director device.
2. Perform one of the following tasks:
  - If you have access to the default partition, reboot the Director device by issuing the **request system reboot director-group** command.
  - If you do not have access to the default partition, power cycle the Director device.

The following menu appears on the Director device console when the Director device boots up:

```
Juniper Networks QFabric Director Install/Recovery Media
- To boot from the local disk, wait 10 seconds or press the Enter key.
- To reinstall the QFabric software on this Director device, type: install
```

3. Type **install** and then press **Enter** to install the software on the Director device.

Once the installation process is complete, the Director device reboots, and the following menu appears on the Director device console:

```
Juniper Networks QFabric Director Install/Recovery Media
- To boot from the local disk, wait 10 seconds or press the Enter key.
- To reinstall the QFabric software on this Director device, type: install
```

4. Press **Enter**.

The Director device reboots from the local disk on which the software was just installed.

5. Log in as root on the Director device.

The following menu appears on the Director device console:

Before you can access the QFabric system, you must complete the initial setup of the Director group by using the steps that follow.



If the initial setup procedure does not complete successfully, log out of the Director device and then log back in to restart this setup menu.

Continue?[y/n]

6. Enter **n** to bypass the initial setup script and enter the Director device root directory, where you can mount the external USB flash drive containing the configuration files and initial setup information.

7. Issue the **ls /mnt** command to list the **mount** directory.

```
root@dg0 ~]# ls /mnt
```

8. Issue the **mkdir** command to create a directory within the mount directory.

```
root@dg0 ~]# mkdir /mnt/myusb
```

9. Issue the **mount /dev/sdb2 /mnt/myusb/** command to mount the external USB flash drive to the local drive of the Director device.

```
root@dg0 ~]# mount /dev/sdb2 /mnt/myusb/
```

10. Issue the **ls -la /mnt/myusb/** command to verify the contents of your mounted external USB flashdrive.

```
root@dg0 ~]# ls -la /mnt/myusb/
total 1770884
drwxr-xr-x 2 root root      4096 Sep  7 05:16 .
drwxr-xr-x 3 root root      4096 Sep  7 10:15 ..
-rw-r--r-- 1 root root    4249 Sep  7 03:52 mybackup-20110907
```

11. Exit the Director device and log back in as root on the Director device.

The following menu appears:

Before you can access the QFabric system, you must complete the initial setup of the Director group by using the steps that follow.

If the initial setup procedure does not complete successfully, log out of the Director device and then log back in to restart this setup menu.

Continue?[y/n] y

Initial Configuration

You may enter the configuration manually or restore from a backup.

Specify a backup file? [y/n] : y

Please specify the full path of the configuration backup file. :  
/mnt/myusb/mybackup-20110907

12. Enter **y** to continue.

13. Enter **y** and specify the path to the backup configuration file located on the external USB flash drive.

```
/mnt/myusb/mybackup-20110907
```

The following messages appear:

```
Saving temporary configuration...
```

```
Configuring peer...
```

```
connect error for 1.1.1.2:9001
```

```
Configuring local interfaces...
```

```
Configuring interface eth0 with [10.49.213.163/24:10.49.213.254]
```

```
Configured interface eth0 with [10.49.213.163/24:10.49.213.254]
```



```

Configuring QFabric software with initial pool of 4000 MAC addresses
[00:10:00:00:00:00 - 00:10:00:00:0f:3b]
Configuring QFabric address [10.49.213.50]
Reconfiguring QFabric software static configuration
Applying the new Director Device password
Applying the QFabric component password
First install initial configuration, generating and sharing SSH keys.
First install initial configuration, generating SSH keys.
connect error for 1.1.1.2:9001
Shared SSH keys.
Configuration complete. Director Group services will auto start within 30
seconds.

```

The Director device reboots from the local disk on which the software was just installed.  
Exit the Director device session and log in to the QFabric default partition CLI.

14. Issue the **request system software configuration-restore** command and specify the path to the backup configuration file located on the external USB flash drive to load the previously saved QFabric system configuration.

15. From the default partition, issue the **request system reboot node-group all** command to reboot all of the Node groups in the QFabric system to ensure that all Node devices are running the same version of software as the Director-group.

```
user@switch> request system reboot node-group all
```

16. From the default partition, issue the **request system reboot fabric** command to reboot the Interconnect devices and the other components in the fabric in the QFabric system to ensure that Interconnect devices are running the same version of software as the Director group.

```
user@switch> request system reboot fabric
```

17. Log in to the default partition and issue the **show version component all** command to verify that all components are running the same version of software.

```

user@switch> show version component all
dg1:
-
Hostname: qfabric
Model: qfx3100
JUNOS Base Version [11.3X30.6]

dg0:
-
Hostname: qfabric
Model: qfx3100
JUNOS Base Version [11.3X30.6]

NW-NG-0:
-
Hostname: qfabric
Model: qfx-jvre
JUNOS Base OS boot [11.3X30.6]
JUNOS Base OS Software Suite [11.3X30.6]
JUNOS Kernel Software Suite [11.3X30.6]
JUNOS Crypto Software Suite [11.3X30.6]
JUNOS Online Documentation [11.3X30.6]
JUNOS Enterprise Software Suite [11.3X30.6]
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]
JUNOS Routing Software Suite [11.3X30.6]

```



FC-0:

-  
Hostname: qfabric  
Model: qfx-jvre  
JUNOS Base OS boot [11.3X30.6]  
JUNOS Base OS Software Suite [11.3X30.6]  
JUNOS Kernel Software Suite [11.3X30.6]  
JUNOS Crypto Software Suite [11.3X30.6]  
JUNOS Online Documentation [11.3X30.6]  
JUNOS Enterprise Software Suite [11.3X30.6]  
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]  
JUNOS Routing Software Suite [11.3X30.6]

FC-1:

Hostname: qfabric  
Model: qfx-jvre  
JUNOS Base OS boot [11.3X30.6]  
JUNOS Base OS Software Suite [11.3X30.6]  
JUNOS Kernel Software Suite [11.3X30.6]  
JUNOS Crypto Software Suite [11.3X30.6]  
JUNOS Online Documentation [11.3X30.6]  
JUNOS Enterprise Software Suite [11.3X30.6]  
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]  
JUNOS Routing Software Suite [11.3X30.6]

DRE-0:

-  
Hostname: dre-0  
Model: qfx-jvre  
JUNOS Base OS boot [11.3X30.6]  
JUNOS Base OS Software Suite [11.3X30.6]  
JUNOS Kernel Software Suite [11.3X30.6]  
JUNOS Crypto Software Suite [11.3X30.6]  
JUNOS Online Documentation [11.3X30.6]  
JUNOS Enterprise Software Suite [11.3X30.6]  
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]  
JUNOS Routing Software Suite [11.3X30.6]

FM-0:

-  
Hostname: qfabric  
Model: qfx-jvre  
JUNOS Base OS boot [11.3X30.6]  
JUNOS Base OS Software Suite [11.3X30.6]  
JUNOS Kernel Software Suite [11.3X30.6]  
JUNOS Crypto Software Suite [11.3X30.6]  
JUNOS Online Documentation [11.3X30.6]  
JUNOS Enterprise Software Suite [11.3X30.6]  
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]  
JUNOS Routing Software Suite [11.3X30.6]

nodedevice1:

-  
Hostname: qfabric  
Model: QFX3500  
JUNOS Base OS boot [11.3X30.6]  
JUNOS Base OS Software Suite [11.3X30.6]  
JUNOS Kernel Software Suite [11.3X30.6]  
JUNOS Crypto Software Suite [11.3X30.6]  
JUNOS Online Documentation [11.3X30.6]  
JUNOS Enterprise Software Suite [11.3X30.6]



```

JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]
JUNOS Routing Software Suite [11.3X30.6]

interconnectdevice1:
-
Hostname: qfabric
Model: QFX3108
JUNOS Base OS boot [11.3X30.6]
JUNOS Base OS Software Suite [11.3X30.6]
JUNOS Kernel Software Suite [11.3X30.6]
JUNOS Crypto Software Suite [11.3X30.6]
JUNOS Online Documentation [11.3X30.6]
JUNOS Enterprise Software Suite [11.3X30.6]
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]
JUNOS Routing Software Suite [11.3X30.6]
warning: from interconnectdevice0: Disconnected

```

- Related Documentation**
- Performing the QFabric System Initial Setup on a QFX3100 Director Group
  - [Upgrading Software on a QFabric System on page 109](#)
  - [request system software configuration-backup on page 356](#)
  - [request system software configuration-restore on page 357](#)

## Recovering from a Failed Software Installation

**Problem** If the Junos OS appears to have been installed but the CLI does not work, or if the switch has no software installed, you can use this recovery installation procedure to install the Junos OS.

**Solution** If a Junos OS image already exists on the switch, you can either install the new Junos OS package in a separate partition, in which case both Junos OS images remain on the switch, or you can remove the existing Junos OS image before you start the new installation process.

To perform a recovery installation:

1. Power on the switch. The loader script starts.
2. After the message **Loading /boot/defaults/loader.conf** appears, you are prompted with the following message:

**Hit [Enter] to boot immediately, or space bar for command prompt.**

Press the Spacebar to enter the manual loader. The **loader>** prompt appears.

3. Enter the following command:

```

loader> install [- --format] [- --external] source
where:

```

- **format**—Enables you to erase the installation media before installing the installation package. If you do not include this option, the system installs the new Junos OS in a different partition from that of the most recently installed Junos OS.



- **external**—Installs the installation package onto external media (a USB stick, for example).
- **source**—Represents the name and location of the Junos OS package, either on a server on the network or as a file on an external media, as shown in the following two examples:
  - Network address of the server and the path on the server; for example, **tftp://192.171.28/junos/jinstall-qfx-11.1R1.5-domestic-signed.tgz**
  - Junos OS package on a USB device (commonly stored in the root drive as the only file), for example, **file:///jinstall-qfx-11.1R1.5-domestic-signed.tgz**.

The installation now proceeds normally and ends with a login prompt.

## Software Installation Overview

A QFX Series product is delivered with the Junos OS preinstalled. As new features and software fixes become available, you can upgrade your software to use them.

When you power on the switch, it starts (boots) using the installed software.

You upgrade the Junos OS on a switch by copying a software package to a switch or other system on your local network and then using the CLI to install the new software on the switch. You then reboot the switch, which boots from the upgraded software. After a successful upgrade, you should back up the new current configuration to a secondary device.

During a successful upgrade, the installation package removes all files from the `/var/tmp` directory of the switch and completely reinstalls the existing software. It retains configuration files, and similar information, such as secure shell and host keys, from the previous version. The previous software package is preserved in a separate disk partition, and you can manually revert to it if necessary. If the software installation fails for any reason, such as loss of power during the installation process, the system returns to the originally active installation when you reboot.

If you encounter any difficulties during software installation or an upgrade, you can use the recovery installation procedure to install the Junos OS on the switch.

### Related Documentation

- [Upgrading Software on QFX3500 and QFX3600 Standalone Switches on page 107](#)
- [Upgrading Software on a QFabric System on page 109](#)
- [Recovering from a Failed Software Installation on page 93](#)
- [Performing a Nonstop Software Upgrade on the QFabric System on page 80](#)
- [Performing a QFabric System Recovery Installation on the Director Group on page 87](#)
- [Performing a Recovery Installation on a QFX3008-I, QFX3600-I, QFX3600, or QFX3500 Device on page 85](#)



## Upgrading Jloader Software on QFX Series Devices

Jloader software contains a boot loader (Uboot), which is used to bring up QFX Series devices and load the Junos OS from the flash memory of these devices. You can upgrade Jloader software on QFX3500 switches, QFX3500 and QFX3600 Node devices, and QFX3600-I and QFX3008-I Interconnect devices.



**NOTE:** Before you upgrade the Jloader software, see [Table 26 on page 95](#), [Table 27 on page 95](#), and [Table 28 on page 96](#) to make sure that you are upgrading to the right version of Jloader software for the Junos OS software release running on your QFX3500 switches, or Node devices and Interconnect devices in your QFabric system.

See [Table 29 on page 96](#) to see which Uboot software versions are available and the filenames of the Jloader software packages.

**Table 26: Junos OS and Jloader Software Compatibility Matrix for the QFX3500 Switch and QFX3500 Node Device**

Junos OS Software Version	Jloader Software Version				
	1.0.73	1.1.1	1.1.2	1.1.4	1.1.5
11.3R1 and later (QFX3500 switch)	Not supported	Supported	Supported	Supported and recommended	Not supported
11.3X30.6 and later (QFX3500 Node device)	Not supported	Supported	Supported	Supported and recommended	Not supported
12.1X49-D1 and later (QFX3500 switch)	Not supported	Supported	Supported	Supported and recommended	Not supported
12.2X50-D1 and later (QFX3500 switch and QFX3500 Node device)	Not supported	Supported	Supported	Supported and recommended	Not supported



**NOTE:** An en dash means that the item is not applicable.

**Table 27: Junos OS and Jloader Software Compatibility Matrix for the QFX3008-I Interconnect Device**

Junos OS Software Version	Jloader Software Version				
	1.0.73	1.1.1	1.1.2	1.1.4	1.1.5
11.3X30.9 and later (QFX3008-I Interconnect device)	-	Supported	Supported	Supported and recommended	Not supported



**Table 27: Junos OS and Jloader Software Compatibility Matrix for the QFX3008-I Interconnect Device (continued)**

Junos OS Software Version	Jloader Software Version				
	1.0.73	1.1.1	1.1.2	1.1.4	1.1.5
11.3X30.6 and later (QFX3008-I Interconnect device)	-	Supported	Supported	Supported and recommended	Not supported
12.2X50-D1 and later (QFX3008-I Interconnect device)	-	Supported	Supported	Supported and recommended	Not supported



**NOTE:** An en dash means that the item is not applicable.

**Table 28: Junos OS and Jloader Software Compatibility Matrix for the QFX3600-I Interconnect Device and QFX3600 Node Device**

Junos OS Software Version	Jloader Software Version				
	1.0.73	1.1.1	1.1.2	1.1.4	1.1.5
12.2X50-D1 and later (QFX3600-I Interconnect Device and QFX3600 Node Device)	-	-	-	-	Supported
12.2X50-D20 and later (QFX3600 switch)	-	-	-	-	Supported

**Table 29: Uboot Software Release and Jloader Software Compatibility Matrix**

Uboot Software Release Number	Jloader Package Name
1.0.73	jloader-qfx-1_0_73.tgz
1.1.1	jloader-qfx-11.3-20110510.0-signed.tgz
1.1.2	jloader-qfx-11.3X30.9-signed.tgz
1.1.4 (11.3R3 and 11.3R2 releases only. Not supported on 11.3R1)	jloader-qfx-11.3I20120127_0733_dc-builder-signed.tgz
1.1.4 (12.1R1 release and later)	jloader-qfx-12.1-20120125_pr.0-signed.tgz
1.1.5 (12.2X50-D1 and later)	jloader-qfx-12.2X50.D10.3-signed.tgz

#### Jloader Software Version 1.1.4 Guidelines

Jloader software version 1.1.4 is compatible with Junos OS Release 11.3R3 and 11.3R2, and Junos OS Release 12.1R1 and later. Jloader software version 1.1.4 is not compatible with Junos OS



Release 11.3R1. The Jloader package names are different for versions 1.1.4 (Junos OS 11.3R3 and 11.3R2) and 1.1.4 (Junos OS 12.2R1 release and later), but the binaries are the same. Because the binaries are the same, you can upgrade or downgrade to any Junos OS release.

- If you have Junos OS Release 11.3 installed and want to upgrade the Jloader software from version 1.1.2 to version 1.1.4, you need to upgrade using the **jloader-qfx-11.3I20120127\_0733\_dc-builder-signed.tgz** package.
- If you have Junos OS Release 11.3R2 installed and want to upgrade to Junos OS Release 12.1, you do not need to upgrade the Jloader software version and can continue to use Jloader version 1.1.2.
- If you have Junos OS Release 12.1 installed and want to upgrade the Jloader software from version 1.1.2 to version 1.1.4, you need to upgrade using the **jloader-qfx-12.1-20120125\_pr.0-signed.tgz** package.
- If you upgrade to Junos OS Release 12.1, you can upgrade to Jloader version 1.1.4 using the **jloader-qfx-12.1-20120125\_pr.0-signed.tgz** package.



### Upgrading Jloader Software on a QFX3500 Switch

---

The Jloader software for a QFX3500 switch resides in two flash memory banks. At any time, one bank acts as the primary bank, and the QFX3500 switch boots from it. The other bank is the backup bank—if the QFX3500 switch cannot boot from the primary bank, it boots from the backup bank. When you upgrade the Jloader software, the upgraded software is installed in the backup bank, which then becomes the new primary bank. Thus the primary and backup banks alternate each time you upgrade the Jloader software, with the primary bank containing the most recently installed version of the software, and the backup bank containing the previous version. To upgrade the Jloader software on a QFX3500 switch, you must perform the upgrade twice: once for each bank. Each upgrade requires that you to reboot the QFX3500 switch.



**NOTE:** If you are running Junos OS Release 11.3R1 or Junos OS Release 11.3R2, you must use the `no-validate` option when you issue the `request system software add` command to upgrade the Jloader software. Otherwise, the installation will fail and you receive a configuration error. The `no-validate` option is not required for Junos OS Release 11.3R3 and later.



**NOTE:** After you upgrade the Jloader software on the first bank, the package is deleted after you reboot. Make sure that you have either downloaded the Jloader software to either a remote site or in a local directory on the switch, such as the `/var/tmp` directory on the QFX3500 device.

1. In a browser, go to <http://www.juniper.net/support/downloads/junos.html> .  
The Junos Platforms Download Software page appears.
2. In the QFX Series section of the Junos Platforms Download Software download page, select the QFX Series platform software you want to download.
3. Select the number of the software version that you want to download in the Release: pull-down window to the right of the tabs on the Download Software page.
4. Select the Software tab and then select the install package you want to download in the Install Package section.
5. In the pop-up Alert box, click the link to the Product Support Notification (PSN) document.
6. Enter your name and password and press **Enter**.
7. Read the End User License Agreement, click the **I agree** radio button, and then click **Proceed**.
8. Open or save the `jloader-qfx-version-signed.tgz` file either to a local system or to a remote location. If you are saving the installation package to a remote system, make sure that you can access it using HTTP, TFTP, FTP, or scp.



9. Log in to the QFX3500 switch and enter the shell. We recommend using a console connection.
10. Determine the version of the Jloader software package installed on the switch.

For example:

```
root@switch% ls
gres-tp krt_gencfg_filter.txt
jloader-qfx-11.3-20110510.0-signed.tgz
```

11. Determine the version of the Uboot software that is running in the bank:

For example:

```
root@switch% kenv | grep boot.version
boot.version="1.0.7"
```

12. Enter the CLI and install the Jloader package.

- To install a Jloader package that is located in the `/var/tmp` directory, issue the **request system software add /var/tmp/jloader-qfx-version.tgz no-validate** command:

For example:

```
user@switch> request system software add
/var/tmp/jloader-qfx-11.3-20110510.0-signed.tgz no-validate
```

You see the following messages during the installation:

```
Verified jloader-qfx-11.3-20110510.0.tgz signed by PackageProduction_11_3_0
Adding jloader-qfx...
Installation in progress, please wait...
Mounted jloader-qfx package on /dev/md8...
Verified manifest signed by PackageProduction_11_3_0
Verified jloader-qfx-11.3-20110510.0 signed by PackageProduction_11_3_0
Registering jloader-qfx as unsupported
```

```
Installation finished successfully.
Please reboot to activate the package
Saving package file in /var/sw/pkg/jloader-qfx-11.3-20110510.0-signed.tgz
...
Saving state for rollback ...
```

```
juniper@qfx3500>
```

- To install a Jloader package located on a remote server using FTP, issue the **request system software add /ftp://hostname/pathname/jloader-qfx-version-signed.tgz no-validate** command.

For example:

```
user@switch> request system software add
/ftp://hostname/pathname/jloader-qfx-11.3-20110510.0-signed.tgz no-validate
```

- To install a Jloader package located on a remote server using HTTP, issue the **request system software add /http://hostname/pathname/jloader-qfx-version-signed.tgz no-validate** command.

For example:

```
user@switch> request system software add
/http://hostname/pathname/jloader-qfx-11.3-20110510.0-signed.tgz no-validate
```



13. When prompted, reboot the Control Board by issuing the **request system reboot** command.

For example:

```
user@switch> request system reboot
Reboot the system ? [yes,no] (no) yes
```

14. Enter the shell and verify that the version of the Uboot software in the primary bank is the version you just installed.

For example:

```
root@switch% kenv | grep boot.version
boot.version="1.1.1"
```

15. To install the Jloader software package on the current backup bank, repeat Step 10 through Step 14.



## Upgrading Jloader Software on a QFabric System

This procedure explains how to upgrade the Jloader software on your Node devices and Interconnect devices. The example shows how to upgrade the Jloader software from version 1.1.1 to 1.1.2 on a Node device with the serial number BBAK1186.



**NOTE:** Before you upgrade the Jloader software, make sure you have the serial numbers of the Node devices, Interconnect devices, and Control Boards in the Interconnect devices you want to upgrade.

1. Issue the **show chassis hardware node-device ?** command to view the serial numbers of the Node devices.

For example:

```
user@qfabric> show chassis hardware node-device ?
<node-device>      Node device identifier
BBAK1186            Node device
BBAK3149            Node device
BBAK3177            Node device
BBAK8063            Node device
BBAK8799            Node device
P2443-C             Node device
P2515-C             Node device
P3708-C             Node device
P3885-C             Node device
P3916-C             Node device
node0               Node device
node1               Node device
node2               Node device
node3               Node device
node4               Node device
node5               Node device
node6               Node device
node7               Node device
node8               Node device
```

An example of a Node device serial number is BBAK1186.

2. Issue the **show chassis hardware interconnect-device ?** command to view the serial numbers of the Interconnect devices.

For example:

```
user@qfabric> show chassis hardware interconnect-device ?
Possible completions:
interconnect-device  Interconnect device identifier
IC-F1052             Interconnect device
IC-F3947             Interconnect device
```

The Interconnect device serial numbers are IC-F1052 and IC-F3947.

3. Issue the **show chassis hardware interconnect-device name** command to view the serial numbers of the Control Boards in the Interconnect device.

For example:

```
user@qfabric> show chassis hardware interconnect-device IC-F3947
```



## Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis	REV 10		F3947	QFXC08-3008
Midplane	REV 10	750-035835	F3947-C	QFX Midplane
CB 0 Board	REV 14	750-035855	ZJ9432	QFX Chassis Control
Routing Engine 0		BUILTIN	BUILTIN	QFX Routing Engine
CB 1 Board	REV 14	750-035855	ZJ9404	QFX Chassis Control

The Control Board serial numbers are ZJ9432 and ZJ9404.

4. Issue the **show chassis firmware node-device *name*** command to see which version of Uboot software you have installed on your Node device.

For example:

```
user@qfabric> show chassis firmware node-device BBAK1186
```

Part	Type	Version
node4	U-Boot	1.1.6 (May 10 2011 - 04:52:59) 1.1.1
	loader	FreeBSD/MIPS U-Boot bootstrap loader 0.1

The Uboot software version is 1.1.1. The loader software version appears after the timestamp for U-Boot 1.1.6.

5. Issue the **show chassis firmware interconnect-device *name*** command to see which version of Uboot software you have installed on the Routing Engines located on the Control Boards of the Interconnect device.

For example:

```
user@qfabric> show chassis firmware interconnect-device IC-F3947
```

Part	Type	Version
Routing Engine 0	U-Boot	U-Boot 1.1.6 (Jan 27 2012 - 03:24:34) 1.1.4
	loader	FreeBSD/MIPS U-Boot bootstrap loader 0.1
Routing Engine 1	U-Boot	U-Boot 1.1.6 (Jan 27 2012 - 03:24:34) 1.1.4
	loader	FreeBSD/MIPS U-Boot bootstrap loader 0.1

The Uboot software version is 1.1.4. The loader software version appears after the timestamp for U-Boot 1.1.6.

6. In a browser, go to <http://www.juniper.net/support/downloads/junos.html>.

The Junos Platforms Download Software page appears.

7. In the QFX Series section of the Junos Platforms Download Software download page, select the QFX Series platform software you want to download.
8. Select the number of the software version that you want to download in the Release: pull-down window to the right of the tabs on the Download Software page.
9. Select the **Software** tab and then select the install package you want to download in the Install Package section.



10. In the pop-up Alert box, click the link to the Product Support Notification (PSN) document.
11. Enter your username and password, and press **Enter**.
12. Read the End User License Agreement, click the **I agree** radio button, and then click **Proceed**.
13. Open or save the **jloader-qfx-version-signed.tgz** file either to a local system or to a remote location. If you are saving the installation package to a remote system, make sure that you can access it using HTTP, TFTP, FTP, or scp.
14. Retrieve the software from the location in which you downloaded it. To do this, issue the **request system software download /path/package-name** command.

For example:

```
user@qfabric> request system software download
ftp://server/files/jloader-qfx-11.3X30.9-signed.tgz
```

15. Log in to the Director device as root and enter the shell to verify that you have downloaded the Jloader software package. We recommend using a console connection. The software package is copied from where you downloaded it and is placed locally on the QFabric system in the **/pbdata/packages** directory.

For example:

```
[root@dg0] # pwd
/pbdata/packages

[root@dg0] # ls
jloader-qfx-11.3X30.9-signed.tgz
```

16. Before you copy over the Jloader software package to the Node device or Interconnect device, determine the directory that matches the serial number of the Node device or Interconnect device that you want to upgrade. View the remote logs and the Node device and Interconnect device serial numbers by issuing the **ls /pbdata/export/rlogs** command at the command line of the Director device before you copy the package over to the device.



**NOTE:** The **/pbdata/export/rlogs/node-device-serial-ID** and **/pbdata/export/rlogs/interconnect-device-serial-ID** directories on the Director device are NFS mounted as the **/tftpboot/logfiles** directories on the Node device and Interconnect device. These directories are created for all Node devices and Interconnect devices in a QFabric system. The Jloader files are stored in the **/tftpboot/logfiles** directories for each Node device and Interconnect device.

For example:

```
[root@dg0 tmp] # ls /pbdata/export/rlogs
02de4930-828b-11e1-a319-00e081c57938 c9898afe-828b-11e1-956c-00e081c57938
04103b2a-29d5-e011-bf8a-0e6bdf3aa1e6 eeba4aac-828b-11e1-85e2-00e081c57938
1e2739e0-828b-11e1-bf74-00e081c57938 F1052
8d8a978c-828b-11e1-a833-00e081c57938 F3947
ad55b89e-828b-11e1-b70e-00e081c57938 P2443-C
BBAK1186 P2515-C
```



BBAK3149	P3708-C
BBAK3177	P3885-C
BBAK8063	P3916-C
BBAK8799	

BBAK1186 is the serial number of the Node device that needs to be upgraded.

17. Copy the Jloader software package from the `/var/tmp` directory to the `/pbdata/export/rlogs/BBAK1186` directory.

For example:

```
[root@dg0 tmp] # cp jloader-qfx-11.3X30.9-signed.tgz /pbdata/export/rlogs/BBAK1186
```

18. Confirm that the Jloader software package you copied over is in the `/pbdata/export/rlogs/BBAK1186` directory.

For example:

```
[root@dg0 tmp] # ls /pbdata/export/rlogs/BBAK1186
jloader-qfx-11.3X30.9-signed.tgz
```

19. Issue the `/root/dns.dump` command to find out the internal IP addresses of the Node device or Interconnect device.

```
[root@dg0 tmp] # /root/dns.dump
; <<>> DiG 9.3.6-P1-RedHat-9.3.6-4.P1.e15 <<>> -t axfr pkg.dcbg.juniper.net
@169.254.0.1
;; global options: printcmd
pkg.dcbg.juniper.net. 600 IN SOA ns.pkg.dcbg.juniper.net.
mail.pkg.dcbg.juniper.net. 152 3600 600 7200 3600
pkg.dcbg.juniper.net. 600 IN NS ns.pkg.dcbg.juniper.net.
pkg.dcbg.juniper.net. 600 IN A 169.254.0.1
pkg.dcbg.juniper.net. 600 IN MX 1 mail.pkg.dcbg.juniper.net.
dcfnode---DCF-ROOT.pkg.dcbg.juniper.net. 45 IN A 169.254.192.17
dcfnode---DRE-0.pkg.dcbg.juniper.net. 45 IN A 169.254.3.3
dcfnode-8d8a978c-828b-11e1-a833-00e081c57938.pkg.dcbg.juniper.net. 45 IN A
169.254.128.19
dcfnode-ad55b89e-828b-11e1-b70e-00e081c57938.pkg.dcbg.juniper.net. 45 IN A
169.254.128.20
dcfnode-BBAK1186.pkg.dcbg.juniper.net. 45 IN A 169.254.128.14
```

The internal IP address for BBAK1186 is 169.254.128.14.

20. Upgrade the Jloader software on the Node device or Interconnect device.

Before you can upgrade the Jloader software, you need to use SSH to log in to the Node device or Interconnect device and verify that the software is in the `/tftpboot/logfiles` directory.

- a. Use SSH to log in to the Node device or Interconnect device.

For example:

```
[root@dg0 tmp] # ssh 160.254.128.14
root@169.254.128.14's password:
--- JUNOS 11.3X30.10 built 2012-03-11 22:55:43 UTC
At least one package installed on this device has limited support.
Run 'file show /etc/notices/unsupported.txt' for details.
root@sng3%
```

- b. Verify that the Jloader software package is in the `tftpboot/logfiles` directory of the Node device or Interconnect device.



For example:

```
root@sng3% ls /tftpboot/logfiles
.index                               jloader-qfx-11.3X30.9-signed.tgz
```

- c. Copy the Jloader software package from the **/tftpboot/logfiles** directory to the **/var/tmp** directory of the Node device or Interconnect device.

For example:

```
root@sng3% cp /tftpboot/logfiles/jloader-qfx-11.3X30.9-signed.tgz /var/tmp
```

- d. Verify that the Jloader software package is in the **/var/tmp** directory of the Node device or Interconnect device.

For example:

```
root@sng3% ls /var/tmp
.snap                               jloader-qfx-11.3X30.9-signed.tgz
    tmp
gres-tp                            krt_gencfg_filter.txt
    vc-autoupgrade
if-rtbdb                           rtsdb
```

- e. Enter CLI mode and issue the **request system software add /var/tmp/jloader-qfx-version-signed.tgz** command.

For example:

```
root@sng3% cli
root@sng3> request system software add /var/tmp/jloader-qfx-11.3X30.9-signed.tgz
Validating on fpc0
Checking compatibility with configuration
Initializing...
Using jbase-11.3X30.10
Verified manifest signed by PackageProduction_11_3_0
Verified jbase-11.3X30.10 signed by PackageProduction_11_3_0
Using /var/tmp/jloader-qfx-11.3X30.9-signed.tgz
Verified jloader-qfx-11.3X30.9.tgz signed by PackageProduction_11_3_0
Using jloader-qfx-11.3X30.9.tgz
Checking jloader-qfx requirements on /
Verified manifest signed by PackageProduction_11_3_0
Verified jloader-qfx-11.3X30.9 signed by PackageProduction_11_3_0
Using jkernel-qfx-11.3X30.10
Verified manifest signed by PackageProduction_11_3_0
Verified jkernel-qfx-11.3X30.10 signed by PackageProduction_11_3_0
Using jroute-qfx-11.3X30.10
Verified manifest signed by PackageProduction_11_3_0
Verified jroute-qfx-11.3X30.10 signed by PackageProduction_11_3_0
Using jcrypto-qfx-11.3X30.10
Verified manifest signed by PackageProduction_11_3_0
Verified jcrypto-qfx-11.3X30.10 signed by PackageProduction_11_3_0
Using jweb-qfx-11.3X30.10
Verified manifest signed by PackageProduction_11_3_0
Verified jweb-qfx-11.3X30.10 signed by PackageProduction_11_3_0
Using jswitch-qfx-11.3X30.10
Verified manifest signed by PackageProduction_11_3_0
Verified jswitch-qfx-11.3X30.10 signed by PackageProduction_11_3_0
Hardware Database regeneration succeeded
Validating against /config/juniper.conf.gz
mgd: commit complete
Validation succeeded
```



Done with validate on all chassis

```
fpc0:
Verified jloader-qfx-11.3X30.9.tgz signed by PackageProduction_11_3_0
Adding jloader-qfx...
Installation in progress, please wait...
Mounted jloader-qfx package on /dev/md10...
Verified manifest signed by PackageProduction_11_3_0
Verified jloader-qfx-11.3X30.9 signed by PackageProduction_11_3_0
#####
#####
Installation finished successfully.
Please reboot to activate the package
Saving package file in /var/sw/pkg/jloader-qfx-11.3X30.9-signed.tgz ...
Saving state for rollback ...
```

Upgrade has completed successfully.  
Reboot is now required.

- f. Reboot both the Node device and Interconnect device twice, because they each contain two partitions.

For example:

```
root@sng3> request system reboot
Reboot the system ? [yes,no] (no) yes
Shutdown NOW!
[pid 37663]
```

```
root@sng3>
```

```
*** FINAL System shutdown message from root@sng3 ***
```

```
System going down IMMEDIATELY
```

- g. Verify that the Uboot software on the Node device or Interconnect device has been upgraded to the new Uboot software by logging in to the QFabric CLI and issuing either the **show chassis firmware node-device *name*** command or the **show chassis firmware interconnect-device *name*** command.

For example:

```
user@qfabric> show chassis firmware node-device BBAK1186
Part          Type      Version
node4         U-Boot   1.1.6 (Nov 19 2011 - 11:42:07) 1.1.2
                                loader   FreeBSD/MIPS U-Boot bootstrap loader
0.1
```

The Uboot software version is now 1.1.2. The loader software version appears after the timestamp for U-Boot 1.1.6.



## Upgrading Software on QFX3500 and QFX3600 Standalone Switches

To upgrade Junos OS, you need to install the appropriate upgrade package on the QFX Series. Upgrading involves these tasks:

1. [Downloading Software Files with a Browser on page 107](#)
2. [Accessing Software Downloaded to a Remote Location on page 108](#)
3. [Connecting to the Console Port on page 108](#)
4. [Backing Up the Current Configuration Files on page 108](#)
5. [Installing the Software Package on page 108](#)

### Downloading Software Files with a Browser

To download the software package from the Juniper Networks Support website, go to <http://www.juniper.net/support/>.



**NOTE:** To access the download site, you must have a service contract with Juniper Networks and an access account. If you need help obtaining an account, complete the registration form at the Juniper Networks website <https://www.juniper.net/registration/Register.jsp>.

1. In a browser, go to <http://www.juniper.net/support/downloads/junos.html>.

The **Junos Platforms Download Software** page appears.

2. In the **QFX Series** section of the **Junos Platforms Download Software** download page, select the QFX Series platform software you want to download.
3. Select the number of the software version that you want to download in the **Release:** pull-down window to the right of the tabs on the **Download Software** page.
4. Select the **Software** tab and then select the install package you want to download in the **Install Package** section.

A login screen appears.

5. Enter your name and password and press **Enter**.
6. Read the End User License Agreement, click the **I agree** radio button, and then click **Proceed**.
7. Save the **jinstall-qfx-<version>-domestic-signed.tgz** file on your computer.
8. Open or save the installation package either to the local system in the **var/tmp** directory or to a remote location. If you are saving the installation package to a remote system, make sure that you can access it using HTTP, TFTP, FTP, or scp.



### Accessing Software Downloaded to a Remote Location

---

To access the installation package if you downloaded it to a remote location (for example, any system other than the switch):

1. From the command line, make sure you are in the **/var/tmp** directory of the switch.
2. Start the shell interface:  
`user@switch> start shell`
3. Initiate an FTP, TFTP, or scp session.

In this example, FTP is used.

- `>ftp`
4. Use FTP to access the remote location where the installation package resides.  
`ftp ftp://<hostname>/<pathname>/<package-name-m.mZx-distribution>.tgz.`  
where `<package-name-m.mZx-distribution>.tgz` is  
`jinstall-qfx-11.1R1.5-domestic-signed.tgz`
5. When prompted, enter your username and password.
6. Use the **get** command to transfer the installation package from the remote location to your **/var/tmp** directory on your switch.

`get <package-name-m.mZx-distribution>.tgz`

7. Close the FTP session:

`bye`

### Connecting to the Console Port

---

We recommend that you connect to the console port while installing the installation package so you can respond to any required user input and detect any errors that may occur.

### Backing Up the Current Configuration Files

---

Before you install the new installation package, we strongly recommend that you back up your current configuration files because the upgrade process removes all of the stored files on the switch.

To back up your current configuration files, enter the **save** command:

`user@switch> save filename`

Executing this command saves a copy of your configuration files to a remote location such as an external USB device.

### Installing the Software Package

---



**NOTE:** Before you install the software, back up any critical files in **/var/home**. For more information regarding how to back up critical files, contact Customer Support at <http://www.juniper.net/support>.

---



Install the software in one of two ways:

If the installation package resides locally on the switch, execute the **request system software add validate <pathname> <source> reboot** command.

For example:

```
user@switch> request system software add validate
/var/tmp/jinstall-qfx-11.1R1.5-domestic-signed.tgz reboot
```

If the Install Package resides remotely, execute the **request system software add validate <pathname> <source> reboot** command.

For example:

```
user@switch# request system software add validate
ftp://ftppserver/directory/jinstall-qfx-11.1R1.5-domestic-signed.tgz reboot
```

After the reboot has finished, verify that the new version of software has been properly installed by executing the **show version** command.

```
user@switch> show version
```

#### Related Documentation

- [Overview of CoS Upgrade Requirements \(Junos OS Release 11.1 or 11.2 to a Later Release\) on page 34](#)
- [Software Installation Overview on page 94](#)
- [Recovering from a Failed Software Installation on page 93](#)
- [Upgrading Jloader Software on QFX Series Devices on page 95](#)
- [request system software add on page 348](#)
- [Installation and Upgrade Guide](#)

## Upgrading Software on a QFabric System

The QFabric system software package contains software for all of the different components in the QFabric system, such as the Director group, Interconnect devices, Node devices, and other QFabric system components. You can upgrade the software on all of the QFabric components at the same time using the **request system software add package-name component all reboot** command.



**NOTE:** Downgrading software on a QFabric system is not supported.

This topic describes the following tasks:

- [Backing Up the Current Configuration Files on page 110](#)
- [Downloading Software Files Using a Browser on page 110](#)
- [Retrieving Software Files for Download on page 111](#)
- [Installing the Software Package on the Entire QFabric System on page 111](#)



## Backing Up the Current Configuration Files

---

To back up your current configuration files:

```
user@switch> request system software configuration-backup path
```

Back up the configuration files to a local directory, remote server, or removable drive (for example, an external USB flash drive).

For example:

```
user@switch> request system software configuration-backup /media/USB/
```

## Downloading Software Files Using a Browser

---



**NOTE:** To access the download site, you must have a service contract with Juniper Networks and an access account. If you need help obtaining an account, complete the registration form at the Juniper Networks website <https://www.juniper.net/registration/Register.jsp>.

---

To download the software package:

1. In a browser, go to <http://www.juniper.net/support/downloads/junos.html>.

The Junos Platforms - Download Software page appears.

2. In the QFX Series box, select the QFabric system for which you want to download the software.

The Software Download page for the selected QFabric system appears.

3. Click the **Software** tab and select the software release number from the **Release** list that appears to the right of the Software tab.
4. Select the complete install package you want to download in the **QFabric System Install Package** section:
  - If you want to upgrade the entire QFabric system, select **QFabric System - Complete Install Package**.
  - If you want to upgrade either a single Node or Interconnect device for recovery purposes, select **Node and Interconnect Device Install Package**. For information on how to perform a recovery installation on either a Node or Interconnect device, see [“Performing a Recovery Installation on a QFX3008-I, QFX3600-I, QFX3600, or QFX3500 Device”](#) on page 85.

A login screen appears.

5. Enter your user ID and password and click **Login**.
6. Read the End User License Agreement, select the **I agree** option button, and then click **Proceed**.
7. Save the **jinstall-qfabric-version.rpm** file on your computer.



### Retrieving Software Files for Download

Retrieve the software from the location in which you downloaded it. To do this, issue the **request system software download** command. The software package is copied from where you downloaded it and is placed locally on the QFabric system.

- To retrieve the software:

```
user@switch> request system software download /path/package-name
```

For example:

```
user@switch> request system software download
ftp://server/files/jinstall-qfabric-11.3X30.6.rpm
```

### Installing the Software Package on the Entire QFabric System



**NOTE:** On a QFabric system, a QFX3500 Node device or QFX3600 Node device might not be able to participate as a Node device in the QFabric system if the Node device is running a different version of software from that of the Director group. This mismatch of software versions between the Node device and the Director group can occur when the Node device is introduced into the setup, and both Director devices go offline before the Node device completes its auto-upgrade process to upgrade its software version to the same software version running on the Director group. The workaround is to reboot the QFX3500 or QFX3600 Node device once the Director group comes back online. The QFX3500 or QFX3600 Node device will initiate auto-upgrade and upgrade its software version from the Director group.

1. Issue the **request system software add package-name component all reboot** command.

For example:

```
user@switch> request system software add jinstall-qfabric-11.3X30.6.rpm component all
reboot
```



**NOTE:** If you receive an error message after issuing the **request system software add package-name component all reboot** command that says that the configuration file cannot be loaded as is, you will need to enter configuration mode, make any necessary changes to the configuration file, and then commit the changes.





**NOTE:** The default value for a QFabric system software upgrade is `validate`. The validation step adds up to 10 minutes to the overall software upgrade. If the validation fails, the upgrade does not proceed and the QFabric system automatically issues the `request system software rollback` command to restore the current software image. If you upgrade more than one component (for example, by issuing the `component all` option), validation failure on one device stops the upgrade process for the other devices. If you do not want to validate the software package against the current configuration, issue the `no-validate` option.

2. After the reboot has finished, verify that the new version of software has been properly installed by issuing the `show version component all` command.

```
user@switch> show version component all
dg1:
-
Hostname: qfabric
Model: qfx3100
JUNOS Base Version [11.3X30.6]

dg0:
-
Hostname: qfabric
Model: qfx3100
JUNOS Base Version [11.3X30.6]

NW-NG-0:
-
Hostname: qfabric
Model: qfx-jvre
JUNOS Base OS boot [11.3X30.6]
JUNOS Base OS Software Suite [11.3X30.6]
JUNOS Kernel Software Suite [11.3X30.6]
JUNOS Crypto Software Suite [11.3X30.6]
JUNOS Online Documentation [11.3X30.6]
JUNOS Enterprise Software Suite [11.3X30.6]
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]
JUNOS Routing Software Suite [11.3X30.6]

FC-0:
-
Hostname: qfabric
Model: qfx-jvre
JUNOS Base OS boot [11.3X30.6]
JUNOS Base OS Software Suite [11.3X30.6]
JUNOS Kernel Software Suite [11.3X30.6]
JUNOS Crypto Software Suite [11.3X30.6]
JUNOS Online Documentation [11.3X30.6]
JUNOS Enterprise Software Suite [11.3X30.6]
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]
JUNOS Routing Software Suite [11.3X30.6]

FC-1:
Hostname: qfabric
Model: qfx-jvre
JUNOS Base OS boot [11.3X30.6]
JUNOS Base OS Software Suite [11.3X30.6]
```



```
JUNOS Kernel Software Suite [11.3X30.6]
JUNOS Crypto Software Suite [11.3X30.6]
JUNOS Online Documentation [11.3X30.6]
JUNOS Enterprise Software Suite [11.3X30.6]
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]
JUNOS Routing Software Suite [11.3X30.6]
```

DRE-0:

-

```
Hostname: dre-0
Model: qfx-jvre
JUNOS Base OS boot [11.3X30.6]
JUNOS Base OS Software Suite [11.3X30.6]
JUNOS Kernel Software Suite [11.3X30.6]
JUNOS Crypto Software Suite [11.3X30.6]
JUNOS Online Documentation [11.3X30.6]
JUNOS Enterprise Software Suite [11.3X30.6]
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]
JUNOS Routing Software Suite [11.3X30.6]
```

FM-0:

-

```
Hostname: qfabric
Model: qfx-jvre
JUNOS Base OS boot [11.3X30.6]
JUNOS Base OS Software Suite [11.3X30.6]
JUNOS Kernel Software Suite [11.3X30.6]
JUNOS Crypto Software Suite [11.3X30.6]
JUNOS Online Documentation [11.3X30.6]
JUNOS Enterprise Software Suite [11.3X30.6]
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]
JUNOS Routing Software Suite [11.3X30.6]
```

nodedevice1:

-

```
Hostname: qfabric
Model: QFX3500
JUNOS Base OS boot [11.3X30.6]
JUNOS Base OS Software Suite [11.3X30.6]
JUNOS Kernel Software Suite [11.3X30.6]
JUNOS Crypto Software Suite [11.3X30.6]
JUNOS Online Documentation [11.3X30.6]
JUNOS Enterprise Software Suite [11.3X30.6]
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]
JUNOS Routing Software Suite [11.3X30.6]
```

interconnectdevice1:

-

```
Hostname: qfabric
Model: QFX3108
JUNOS Base OS boot [11.3X30.6]
JUNOS Base OS Software Suite [11.3X30.6]
JUNOS Kernel Software Suite [11.3X30.6]
JUNOS Crypto Software Suite [11.3X30.6]
JUNOS Online Documentation [11.3X30.6]
JUNOS Enterprise Software Suite [11.3X30.6]
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]
JUNOS Routing Software Suite [11.3X30.6]
```



- Related Documentation**
- [Software Installation Overview on page 94](#)
  - [Performing a QFabric System Recovery Installation on the Director Group on page 87](#)
  - [Upgrading Jloader Software on QFX Series Devices on page 95](#)
  - [request system software add on page 348](#)
  - [Installation and Upgrade Guide](#)

## Upgrading Software Using Automatic Software Download

The automatic software download feature uses the DHCP message exchange process to download and install software packages. You configure the automatic software download feature on switches acting as DHCP clients. You must enable automatic software download on the switch before the software upgrade can occur.

You configure a path to a software package file on the DHCP server. The server communicates the path to the software package file through DHCP server messages.

If you enable automatic software download, the DHCP client switch compares the software package name in the DHCP server message to the name of the software package that booted the switch. If the software packages are different, the DHCP client switch downloads and installs the software package specified in the DHCP server message.

Before you upgrade software using automatic software download, ensure that you have configured DHCP services for the switch, including configuring a path to a boot server and a boot file. See [“Configuring a DHCP Server on Switches \(CLI Procedure\)” on page 121](#) for information about using the CLI to configure DHCP services and settings. See [Configuring DHCP Services \(J-Web Procedure\)](#) for information about using the J-Web interface to configure DHCP services and settings.

To enable automatic software download on an EX Series switch acting as a DHCP client:

```
[edit chassis]
user@switch# set auto-image-upgrade
```

After automatic software download is enabled on your DHCP client switch and after DHCP services are enabled on your network, an automatic software download can occur at any time as part of the DHCP message exchange process.

If an automatic software download occurs, you see the following message on the switch:

```
Auto-image upgrade started
On successful installation system will reboot automatically
```

The switch reboots automatically to complete the upgrade.

- Related Documentation**
- [Verifying That Automatic Software Download Is Working Correctly on page 115](#)
  - [Understanding Software Installation on EX Series Switches](#)
  - [Understanding DHCP Services for Switches on page 39](#)



## Verifying Autoinstallation Status

**Purpose** Display the status of the autoinstallation feature.

**Action** From the CLI, enter the **show system autoinstallation status** command.

### Sample Output

```
user@switch> show system autoinstallation status
Autoinstallation status:
Master state: Active
Last committed file: None
Configuration server of last committed file: 10.25.100.1
Interface:
  Name: ge-0/0/0
  State: Configuration Acquisition
  Acquired:
    Address: 192.168.124.75
    Hostname: host-ge-000
    Hostname source: DNS
    Configuration filename: switch-ge-000.conf
    Configuration filename server: 10.25.100.3
  Address acquisition:
    Protocol: DHCP Client
    Acquired address: None
    Protocol: RARP Client
    Acquired address: None
Interface:
  Name: ge-0/0/1
  State: None
  Address acquisition:
    Protocol: DHCP Client
    Acquired address: None
    Protocol: RARP Client
    Acquired address: None
```

**Meaning** The output shows the settings configured for autoinstallation. Verify that the values displayed are correct for the switch when it is deployed on the network.

**Related Documentation**

- [Configuring Autoinstallation of Configuration Files \(CLI Procedure\) on page 118](#)

## Verifying That Automatic Software Download Is Working Correctly

**Purpose** Verify that the automatic software download feature is working correctly.



**Action** Use the `show system services dhcp client interface-name` command to verify that the automatic software download feature has been used to install a software package.

```
user@switch> show system services dhcp client ge-0/0/1.0
Logical Interface Name      ge-0/0/1.0
Hardware address            00:0a:12:00:12:12
Client Status               bound
Vendor Identifier           ether
Server Address              10.1.1.1
Address obtained            10.1.1.89
Lease Obtained at           2009-08-20 18:13:04 PST
Lease Expires at            2009-08-22 18:13:04 PST

DHCP Options :
Name: name-server, Value: [ 10.209.194.131, 2.2.2.2, 3.3.3.3 ]
Name: server-identifier, Value: 10.1.1.1
Name: router, Value: [ 10.1.1.80 ]
Name: boot-image,
Value: jinstall-ex-4200-9.6R1.5-domestic-signed.tgz
Name: boot-image-location,
Value: 10.1.1.25:/bootfiles/
```

**Meaning** The output from this command shows the name and location of the software package under DHCP options when automatic software download was last used to install a software package. The sample output in DHCP options shows that the last DHCP server message to arrive on the DHCP client had a boot server address of 192.168.1.165 and a boot file named jinstall-ex-4200-9.6R1.5-domestic-signed.tgz. If automatic software download was enabled on this client switch during the last DHCP message exchange, these values were used by the switch to upgrade the software.

**Related Documentation**

- [Upgrading Software Using Automatic Software Download on page 114](#)
- [Understanding DHCP Services for Switches on page 39](#)



## CHAPTER 5

# Configuration

- [Initial Configuration on page 117](#)
- [Configuration Examples on page 157](#)
- [Configuration Statements on page 161](#)

### Initial Configuration

---

- [Configuring Autoinstallation of Configuration Files \(CLI Procedure\) on page 118](#)
- [Configuring a DHCP Client \(CLI Procedure\) on page 120](#)
- [Configuring a DHCP Server on Switches \(CLI Procedure\) on page 121](#)
- [Configuring a DNS Name Server for Resolving a Hostname into Addresses on page 123](#)
- [Configuring the Domain Name for the Router or Switch on page 124](#)
- [Configuring the Domains to Search When a Router or Switch Is Included in Multiple Domains on page 124](#)
- [Configuring the Hostname of the Router or Switch on page 125](#)
- [Configuring the Junos OS to Determine Conditions That Trigger Alarms on Different Interface Types on page 125](#)
- [Configuring the Junos OS to Disable Protocol Redirect Messages on the Router or Switch on page 126](#)
- [Configuring the Junos OS to Disable the Reporting of IP Address and Timestamps in Ping Responses on page 126](#)
- [Configuring the Junos OS to Display a System Login Announcement on page 127](#)
- [Configuring the Junos OS to Display a System Login Message on page 127](#)
- [Configuring the Junos OS to Extend the Default Port Address Range on page 128](#)
- [Configuring the Junos OS ICMPv4 Rate Limit for ICMPv4 Routing Engine Messages on page 129](#)
- [Configuring the Junos OS to Select a Fixed Source Address for Locally Generated TCP/IP Packets on page 129](#)
- [Configuring NTP Authentication Keys on page 129](#)
- [Configuring NTP Authentication Keys \(QFabric System\) on page 130](#)
- [Configuring the NTP Time Server and Time Services on page 131](#)



- [Configuring the NTP Time Server and Time Services \(QFabric System\) on page 133](#)
- [Specifying the Physical Location of the Switch on page 134](#)
- [Configuring the Router or Switch to Listen for Broadcast Messages Using NTP on page 135](#)
- [Configuring the Router or Switch to Listen for Multicast Messages Using NTP on page 135](#)
- [Configuring System Alarms to Appear Automatically Upon Login on page 136](#)
- [Configuring Time-Based User Access on page 136](#)
- [Configuring the Timeout Value for Idle Login Sessions on page 137](#)
- [Configuring a QFX3500 Device as a Standalone Switch on page 138](#)
- [Creating an Emergency Boot Device for a QFX Series Device on page 140](#)
- [Creating a Snapshot and Using It to Boot a QFX Series Switch on page 141](#)
- [Including the Year or Millisecond in Timestamps on page 142](#)
- [Mapping the Hostname of the Switch to IP Addresses on page 143](#)
- [Methods for Configuring Junos OS on page 144](#)
- [Modifying the Default Time Zone for a Router or Switch Running Junos OS on page 147](#)
- [Rebooting and Halting a QFX Series Product on page 147](#)
- [Reverting to the Default Factory Configuration on page 148](#)
- [Reverting to the Default Factory Configuration by Using the request system zeroize Command on page 149](#)
- [Reverting to the Rescue Configuration on page 150](#)
- [Saving Core Files Generated by Junos OS Processes on page 150](#)
- [Setting a Custom Time Zone on Routers or Switches Running Junos OS on page 150](#)
- [Setting the Date and Time on page 152](#)
- [Specifying Access Privileges for Junos OS Operational Mode Commands on page 153](#)
- [Synchronizing and Coordinating Time Distribution Using NTP on page 155](#)
- [Viewing Core Files from Junos OS Processes on page 156](#)

## Configuring Autoinstallation of Configuration Files (CLI Procedure)

Autoinstallation is the automatic configuration of a device over the network from a pre-existing configuration file that you create and store on a configuration server—typically a Trivial File Transfer Protocol (TFTP) server. You can use autoinstallation to automatically deploy multiple devices from a central location in the network.

To specify autoinstallation to run when you power on a switch already installed in your network, you can enable it by specifying one or more interfaces, protocols, and configuration servers to be used for autoinstallation.

Before you explicitly enable and configure autoinstallation on the switch, perform these tasks as needed for your network's configuration:



- Have a service available—typically Dynamic Host Configuration Protocol (DHCP)—to assign an IP address to the switch
- Configure a DHCP server on your network to meet your network requirements. You can configure a switch to operate as a DHCP server. For more information, see [“Configuring a DHCP Server on Switches \(CLI Procedure\)” on page 121](#).
- Create one of the following configuration files, and store it on a TFTP server (or HTTP server or FTP server) in the network:
  - A host-specific file with the name **hostname.conf** for each switch undergoing autoinstallation. Replace **hostname** with the name of a switch. The **hostname.conf** file typically contains all the configuration information necessary for the switch with this hostname.
  - A default configuration file named **switch.conf** with the minimum configuration necessary to enable you to telnet into the new switch for further configuration.
- Physically attach the switch to the network using a Gigabit Ethernet port.
- If you configure the DHCP server to provide only the TFTP server hostname, add an IP address-to-hostname mapping entry for the TFTP server to the DNS database file on the Domain Name System (DNS) server in the network.
- If the switch is not on the same network segment as the DHCP server (or other device providing IP address resolution), configure an existing device as an intermediate device to receive TFTP and DNS requests and forward them to the TFTP server and the DNS server. You must configure the LAN or serial interface on the intermediate device with the IP addresses of the hosts providing TFTP and DNS services. Connect this interface to the switch.
- If you are using **hostname.conf** files for autoinstallation, you must also complete the following tasks:
  - Configure the DHCP server to provide a **hostname.conf** filename to each switch. Each switch uses its **hostname.conf** filename to request a configuration file from the TFTP server. Copy the necessary **hostname.conf** configuration files to the TFTP server.
  - Create a default configuration file named **network.conf**, and copy it to the TFTP server. This file contains IP-address-to-hostname mapping entries. If the DHCP server does not send a **hostname.conf** filename to a new switch, the switch uses **network.conf** to resolve its hostname based on its IP address.

Alternatively, you can add the IP-address-to-hostname mapping entry for the switch to a DNS database file.

The switch uses the hostname to request a **hostname.conf** file from the TFTP server.

To configure autoinstallation:

1. Specify the URL address of one or more servers from which to obtain configuration files.

```
[edit system]
user@switch# set autoinstallation configuration-servers tftp://tftpconfig.sp.com
```





**NOTE:** You can also use an FTP address, for example, `ftp://user:password@sftpconfig.sp.com`.

2. Configure one or more Ethernet interfaces to perform autoinstallation and one or two procurement protocols for each interface. The switch uses the protocols to send a request for an IP address for the interface:

```
[edit system]
user@switch# set autoinstallation interfaces ge-0/0/0 bootp
```

#### Related Documentation

- [Verifying Autoinstallation Status on page 115](#)
- [Understanding Autoinstallation of Configuration Files on page 36](#)
- [Understanding DHCP Services for Switches on page 39](#)

## Configuring a DHCP Client (CLI Procedure)

A Dynamic Host Configuration Protocol (DHCP) server can provide many valuable TCP/IP network services. DHCP can dynamically allocate IP parameters, such as an IP address, to clients, and it can also deliver software upgrades to clients.

DHCP configuration consists of two components, configuration of DHCP clients and configuration of a DHCP server. Client configuration determines how clients send a message requesting an IP address, whereas a DHCP server configuration enables the server to send an IP address configuration back to the client. This topic describes configuring a DHCP client. For directions for configuring a DHCP server, see [“Configuring a DHCP Server on Switches \(CLI Procedure\)” on page 121](#).

You can change DHCP client configurations from the switch, using client identifiers to indicate which clients you want to configure.

To configure a DHCP client, you configure an interface to belong to the DHCP family and specify additional attributes, as desired:

```
[edit]
user@switch# set interfaces interface-name unit number family inet dhcp
configuration-statement
```

The options that you can configure are listed in [Table 30 on page 120](#). Replace the variable *configuration-statement* with one or more of the statements listed in this table. If you do not explicitly configure these options, the switch uses default values for them.

**Table 30: DHCP Client Settings**

Configuration Statement	Description
<b>client-identifier</b>	Unique client ID—By default this consists of the hardware type (01 for Ethernet) and the MAC address (a.b.c.d). For this example, the value would be 01abcd.
<b>lease-time</b>	Ttime in seconds that a client holds the lease for an IP address assigned by a DHCP server. If a client does not request a specific lease time, then the server sends the default lease time. The default lease time on a Junos OS DHCP server is 1 day.



Table 30: DHCP Client Settings (*continued*)

Configuration Statement	Description
<code>retransmission-attempt</code>	Number of times the client attempts to retransmit a DHCP packet.
<code>retransmission-interval</code>	Time between transmission attempts.
<code>server-address</code>	IP address of the server that the client queries for an IP address.
<code>update-server</code>	TCP/IP settings learned from an external DHCP server to the DHCP server running on the switch are propagated.
<code>vendor-option</code>	Vendor class ID (CPU's manufacturer ID string) for the DHCP client.

**Related  
Documentation**

- [Configuring a DHCP Server on Switches \(CLI Procedure\) on page 121](#)
- [Understanding DHCP Services for Switches on page 39](#)

## Configuring a DHCP Server on Switches (CLI Procedure)

A Dynamic Host Configuration Protocol (DHCP) server can provide two valuable TCP/IP network services. DHCP can dynamically allocate IP parameters, such as an IP address, to clients and it can also deliver software upgrades to clients.

DHCP configuration consists of two components, optional reconfiguration of default settings on DHCP clients and configuration of a DHCP server. This topic covers configuration of the DHCP server. For directions for reconfiguring a DHCP client, see [“Configuring a DHCP Client \(CLI Procedure\)” on page 120](#).

You can configure either of two versions of a DHCP server on a switch—either the extended server version or the legacy server version. We recommend that you use the extended server configuration unless you need to keep your DHCP server configuration backward-compatible with the legacy server version.

This topic includes the following tasks:

1. [Configuring an Extended DHCP Server on a Switch on page 121](#)
2. [Configuring a Legacy DHCP Server on a Switch \(CLI Procedure\) on page 122](#)

### Configuring an Extended DHCP Server on a Switch

To configure an extended DHCP server, you must configure a DHCP pool, indicate IP addresses for the pool, and create a server group. Additional configurations are optional.

Do not assign addresses that are already in use in the network to address pools. The extended DHCP server does not check whether addresses are already in use before assigning them to clients.

1. Create an address pool for DHCP IP addresses:

[edit]



```
user@switch# set access address-pool address-pool
```

2. Configure addresses for DHCP dynamic assignment:

```
[edit access address-assignment]  
user@switch# set pool address-pool-name
```

3. Create a server group on the switch, providing a group name and an interface for DHCP:

```
[edit system services dhcp-local-server]  
user@switch# set group group-name interface interface-name
```

4. Optionally, process the information protocol data units (PDUs):

```
[edit system services dhcp-local-server]  
user@switch# set overrides process-inform
```

5. Optionally, redefine the order of attribute matching for pool selection:

```
[edit system services dhcp-local-server]  
user@switch# set pool-match-order ip-address-first
```

6. Optionally, enable dynamic reconfiguration triggered by the DHCP extended server of all DHCP clients or only the DHCP clients serviced by the specified group of interfaces:

```
[edit system services dhcp-local-server]  
user@switch# set reconfigure  
  
[edit system services dhcp-local-server group group-name]  
user@switch# set reconfigure
```

### Configuring a Legacy DHCP Server on a Switch (CLI Procedure)

To configure a legacy DHCP server, you must configure a pool of IP addresses for dynamic assignment. You only need to supply a series of network addresses. Additional configurations are optional.

1. Configure a pool of IP addresses for dynamic assignment:

```
[edit system services dhcp]  
user@switch# set pool (Legacy DHCP) network-range
```



**NOTE:** Step 2 through step 15 assign global values at the [edit system services dhcp] hierarchy level. You can also assign the same values to a specific pool using those same commands at the [edit system services dhcp pool network-range] hierarchy level.

2. Optionally, change the domain search list used to resolve hostnames:

```
[edit system services dhcp]  
user@switch# set domain-search [ domain-list ]
```

3. Optionally, change the domain name server (DNS) name that the DHCP server advertises to clients:

```
[edit system services dhcp]
```



```
user@switch# set name-server address
```

- Optionally, change the DHCP options:

```
[edit system services dhcp]
user@switch# set option id-number
```

- Optionally, change the devices advertised to clients:

```
[edit system services dhcp]
user@switch# set router address
```

- Optionally, change the SIP server:

```
[edit system services dhcp]
user@switch# set sip-server addresses-or-names
```

For more information, see [Configuring a DHCP SIP Server \(CLI Procedure\)](#).

- Optionally, change the DHCP client's hardware address:

```
[edit system services dhcp]
user@switch# set static-binding mac-address
```

- Optionally, change the NetBIOS name server:

```
[edit system services dhcp]
user@switch# set wins-server address
```

#### Related Documentation

- [Configuring a DHCP Client \(CLI Procedure\) on page 120](#)
- [Configuring a DHCP SIP Server \(CLI Procedure\)](#)
- [Understanding DHCP Services for Switches on page 39](#)

## Configuring a DNS Name Server for Resolving a Hostname into Addresses

To have the router or switch resolve hostnames into addresses, you must configure one or more Domain Name System (DNS) name servers by including the **name-server** statement at the **[edit system]** hierarchy level:

```
[edit system]
name-server {
  address;
}
```

The following example shows how to configure two DNS name servers:

```
[edit]
user@switch# set system name-server 192.168.1.253
[edit]
user@switch# set system name-server 192.168.1.254
[edit]
user@switch# show
system {
  name server {
    192.168.1.253;
    192.168.1.254;
  }
}
```



- Related Documentation**
- [name-server on page 237](#)

## Configuring the Domain Name for the Router or Switch

For each router or switch, you should configure the name of the domain in which the router or switch is located. This is the default domain name that is appended to hostnames that are not fully qualified.

To configure the domain name, include the **domain-name** statement at the **[edit system]** hierarchy level:

```
[edit system]
domain-name domain-name;
```

The following example shows how to configure the domain name:

```
[edit]
user@host# set system domain-name company.net
[edit]
user@host# show
system {
    domain-name company.net;
}
```

- Related Documentation**
- domain-name
  - [domain-name on page 225](#)
  - [Example: Configuring the Domain Name for the Router or Switch on page 157](#)

## Configuring the Domains to Search When a Router or Switch Is Included in Multiple Domains

If your router or switch is included in several different domains, you can configure those domain names to be searched.

To configure more than one domain to be searched, include the **domain-search** statement at the **[edit system]** hierarchy level:

```
[edit system]
domain-search [ domain-list ];
```

The domain list can contain up to six domain names, with a total of up to 256 characters.

The following example shows how to configure two domains to be searched:

```
[edit system]
domain-search [ domainone.net domainonealternate.com ]
```

- Related Documentation**
- [Example: Configuring the Domain Name for the Router or Switch on page 157](#)
  - [Configuring a DNS Name Server for Resolving a Hostname into Addresses](#)
  - [Configuring a DNS Name Server for Resolving a Hostname into Addresses on page 123](#)



## Configuring the Hostname of the Router or Switch

To configure the name of the router or switch, include the **host-name** statement at the **[edit system]** hierarchy level:

```
[edit system]
host-name hostname;
```

The name value must be less than 256 characters.

### Related Documentation

- Example: Configuring the Name of the Router, IP Address, and System ID
- [Example: Configuring the Name of the Switch, IP Address, and System ID on page 157](#)
- Configuring Basic Router or Switch Properties
- [Mapping the Hostname of the Switch to IP Addresses on page 143](#)
- [host-name on page 228](#)

## Configuring the Junos OS to Determine Conditions That Trigger Alarms on Different Interface Types

For the different types of PICs, you can configure which conditions trigger alarms and whether they trigger a red or yellow alarm. Red alarm conditions light the **RED ALARM** LED and trigger an audible alarm if one is connected. Yellow alarm conditions light the **YELLOW ALARM** LED and trigger an audible alarm if one is connected.



**NOTE:** By default, any failure condition on the integrated-services interface (Adaptive Services PIC) triggers a red alarm.

To configure conditions that trigger alarms and that can occur on any interface of the specified type, include the **alarm** statement at the **[edit chassis]** hierarchy level.

```
[edit chassis]
alarm {
  interface-type {
    alarm-name (red | yellow | ignore);
  }
}
```

**alarm-name** is the name of an alarm.

### Related Documentation

- System-Wide Alarms and Alarms for Each Interface Type
- Chassis Conditions That Trigger Alarms
- Silencing External Devices Connected to Alarm Relay Contacts



## Configuring the Junos OS to Disable Protocol Redirect Messages on the Router or Switch

By default, the router or switch sends protocol redirect messages. To disable the sending of redirect messages by the router or switch, include the **no-redirects** statement at the **[edit system]** hierarchy level:

```
[edit system]
no-redirects;
```

To reenable the sending of redirect messages on the router or switch, delete the **no-redirects** statement from the configuration.

To disable the sending of redirect messages on a per-interface basis, include the **no-redirects** statement at the **[edit interfaces *interface-name* unit *logical-unit-number* family *family*]** hierarchy level.

### Related Documentation

- Configuring the Junos OS to Ignore ICMP Source Quench Messages
- [Configuring the Junos OS to Select a Fixed Source Address for Locally Generated TCP/IP Packets on page 129](#)
- Junos® OS Network Interfaces

## Configuring the Junos OS to Disable the Reporting of IP Address and Timestamps in Ping Responses

When you issue the **ping** command with the **record-route** option, the Routing Engine displays the path of the ICMP echo request packets and timestamps in the ICMP echo responses by default.

You can configure the Routing Engine to disable the setting of the **record-route** option in the IP header of the ping request packets. Disabling the **record-route** option prevents the Routing Engine from recording and displaying the path of the ICMP echo request packets in the response.

- To configure the Routing Engine to disable the setting of the **record-route** option, include the **no-ping-record-route** statement at the **[edit system]** hierarchy level:

```
[edit system]
no-ping-record-route;
```

- To disable the reporting of timestamps in the ICMP echo responses, include the **no-ping-time-stamp** option at the **[edit system]** hierarchy level:

```
[edit system]
no-ping-time-stamp;
```

By configuring the **no-ping-record-route** and **no-ping-timestamp** options, you can prevent unauthorized persons from discovering information about the provider edge (PE) router or switch and its loopback address.

### Related Documentation

- Configuring the Junos OS to Disable the Routing Engine Response to Multicast Ping Packets



## Configuring the Junos OS to Display a System Login Announcement

By default, no login announcement is displayed. To configure a system login announcement, include the **announcement** statement at the **[edit system login]** hierarchy level:

```
[edit system login]
announcement text;
```

If the announcement text contains any spaces, enclose the text in quotation marks.

A system login *announcement* appears after the user logs in. A system login *message* appears before the user logs in.



**TIP:** You can use the same special characters described to format your system login announcement.

### Related Documentation

- Defining Junos OS Login Classes
- Configuring the Junos OS to Display a System Login Message

## Configuring the Junos OS to Display a System Login Message

By default, no login message is displayed on the router or switch. To configure a system login message, include the **message** statement at the **[edit system login]** hierarchy level:

```
[edit system login]
message text;
```

If the message text contains any spaces, enclose it in quotation marks.

You can format the message using the following special characters:

- \n—New line
- \t—Horizontal tab
- \'—Single quotation mark
- \"—Double quotation mark
- \\—Backslash

The following is a sample login message configuration:

```
[edit]
system {
  login {
    message "\n\n\n\tUNAUTHORIZED USE OF THIS SYSTEM\n
\tIS STRICTLY PROHIBITED!\n\n\tPlease contact
\t'company-noc@company.com\t' to gain\naccess
to this equipment if you need authorization.\n\n\n";
  }
}
```



```
}  
}
```

The preceding login message configuration example produces a login message similar to the following:

```
server% telnet router1  
Trying 1.1.1.1...  
Connected to router1.  
Escape character is '^['.
```

```
UNAUTHORIZED USE OF THIS SYSTEM  
IS STRICTLY PROHIBITED!
```

```
Please contact 'company-noc@company.com' to gain  
access to this equipment if you need authorization.
```

```
router1 (tty0)
```

```
login:
```

A system login message appears before the user logs in. A system login announcement appears after the user logs in.

- Related Documentation**
- Defining Junos OS Login Classes
  - [message on page 235](#)

## Configuring the Junos OS to Extend the Default Port Address Range

By default, the upper range of a port address is 5000. You can increase the range from which the port number can be selected to decrease the probability that someone can determine your port number.

- To configure the Junos OS to extend the default port address range, include the **source-port** statement at the **[edit system internet-options]** hierarchy level:

```
[edit system internet-options]  
source-port upper-limit upper-limit;
```

**upper-limit *upper-limit*** is the upper limit of a source port address and can be a value from 5000 through 65,355.

- Related Documentation**
- Configuring the Junos OS to Disable TCP RFC 1323 Extensions
  - Configuring the Junos OS ARP Learning and Aging Options for Mapping IPv4 Network Addresses to MAC Addresses
  - [source-port on page 256](#)



## Configuring the Junos OS ICMPv4 Rate Limit for ICMPv4 Routing Engine Messages

To limit the rate at which ICMPv4 messages can be generated and received by the Routing Engine, include the **icmpv4-rate-limit** statement at the **[edit system internet-options]** hierarchy level:

```
icmpv4-rate-limit bucket-size bucket-size packet-rate packet-rate;
```

The bucket size is the number of seconds in the rate-limiting bucket. The packet rate is the rate-limiting packets earned per second. Specify a **bucket-size** from 0 through 4294967295 seconds. The default value is 5 seconds. Specify a **packet-rate** from 0 through 4,294,967,295. The default value is 1000.

**Related Documentation**

- [icmpv4-rate-limit on page 228](#)

## Configuring the Junos OS to Select a Fixed Source Address for Locally Generated TCP/IP Packets

By default, the source address included in locally generated Transmission Control Protocol/IP (TCP/IP) packets, such as FTP traffic, and in User Datagram Protocol (UDP) and IP packets, such as Network Time Protocol (NTP) requests, is chosen as the local address for the interface on which the traffic is transmitted. This means that the local address chosen for packets to a particular destination might change from connection to connection based on the interface that the routing protocol has chosen to reach the destination when the connection is established. If multiple equal-cost next hops are present for a destination, locally generated packets use the **lo0** address as a source.

- To configure the software to select a fixed address to use as the source for locally generated IP packets, include the **default-address-selection** statement at the **[edit system]** hierarchy level:

```
[edit system]  
default-address-selection;
```

If you include the **default-address-selection** statement in the configuration, the Junos OS chooses the system default address as the source for most locally generated IP packets. The default address is usually an address configured on the **lo0** loopback interface. For example, if you specified that SSH and telnet use a particular address, but you also have **default-address selection** configured, the system default address is used.

**Related Documentation**

- [Configuring the Junos OS to Disable Protocol Redirect Messages on the Router or Switch on page 126](#)
- [default-address-selection on page 220](#)

## Configuring NTP Authentication Keys

Time synchronization can be authenticated to ensure that the switch obtains its time services only from known sources. By default, network time synchronization is unauthenticated. The switch will synchronize to whatever system appears to have the



most accurate time. We strongly encourage you to configure authentication of network time services.

To authenticate other time servers, include the **trusted-key** statement at the **[edit system ntp]** hierarchy level. Only time servers that transmit network time packets containing one of the specified key numbers are eligible to be synchronized. Additionally, the key needs to match the value configured for that key number. Other systems can synchronize to the local switch without being authenticated.

```
[edit system ntp]
trusted-key [ key-numbers ];
```

Each key can be any 32-bit unsigned integer except 0. Include the **key** option in the **peer**, **server**, or **broadcast** statements to transmit the specified authentication key when transmitting packets. The key is necessary if the remote system has authentication enabled so that it can synchronize to the local system.

To define the authentication keys, include the **authentication-key** statement at the **[edit system ntp]** hierarchy level:

```
[edit system ntp]
authentication-key key-number type type value password;
```

**number** is the key number, **type** is the authentication type (only Message Digest 5 [MD5] is supported), and **password** is the password for this key. The key number, type, and password must match on all systems using that particular key for authentication.

#### Related Documentation

- [NTP Time Server and Time Services Overview on page 33](#)
- [Example: Configuring NTP as a Single Time Source for Router and Switch Clock Synchronization on page 160](#)
- [trusted-key on page 275](#)
- authentication-key

## Configuring NTP Authentication Keys (QFabric System)

To configure the authentication keys using the CLI:

1. Configure the authentication-key number.

```
[edit system ntp]
user@switch# set authentication-key key-number
```

For example, to specify key 5:

```
user@switch# set authentication-key 5
```

2. Specify the type of authentication you want to use.

```
[edit system ntp]
user@switch# set authentication-key type type
```



**NOTE:** MD5 is the only authentication type supported.



For example, to specify **MD5**:

```
user@switch# set authentication-key type md5
```

#### Related Documentation

- [NTP Time Server and Time Services Overview \(QFabric System\) on page 34](#)
- [Configuring the NTP Time Server and Time Services \(QFabric System\) on page 133](#)
- [authentication-key on page 208](#)

## Configuring the NTP Time Server and Time Services

When you use NTP, configure the router or switch to operate in one of the following modes:

- Client mode
- Symmetric active mode
- Broadcast mode
- Server mode

The following topics describe how to configure these modes of operation:

1. [Configuring the Router or Switch to Operate in Client Mode on page 131](#)
2. [Configuring the Router or Switch to Operate in Symmetric Active Mode on page 132](#)
3. [Configuring the Router or Switch to Operate in Broadcast Mode on page 132](#)
4. [Configuring the Router or Switch to Operate in Server Mode on page 132](#)

### Configuring the Router or Switch to Operate in Client Mode

To configure the local router or switch to operate in client mode, include the **server** statement and other optional statements at the **[edit system ntp]** hierarchy level:

```
[edit system ntp]
server address <key key-number> <version value> <prefer>;
authentication-key key-number type type value password;
boot-server address;
trusted-key [ key-numbers ];
```

Specify the address of the system acting as the time server. You must specify an address, not a hostname.

To include an authentication key in all messages sent to the time server, include the **key** option. The key corresponds to the key number you specify in the **authentication-key** statement, as described in .

By default, the router or switch sends NTP version 4 packets to the time server. To set the NTP version level to 1, 2, or 3, include the **version** option.

If you configure more than one time server, you can mark one server preferred by including the **prefer** option.



The following example shows how to configure the router or switch to operate in client mode:

```
[edit system ntp]
authentication-key 1 type md5 value "$9$EgfcvX7VY4ZEcwgoHjkP5Q3CuREyv87";
boot-server 10.1.1.1;
server 10.1.1.1 key 1 prefer;
trusted-key 1;
```

---

### Configuring the Router or Switch to Operate in Symmetric Active Mode

To configure the local router or switch to operate in symmetric active mode, include the **peer** statement at the **[edit system ntp]** hierarchy level:

```
[edit system ntp]
peer address <key key-number> <version value> <prefer>;
```

Specify the address of the remote system. You must specify an address, not a hostname.

To include an authentication key in all messages sent to the remote system, include the **key** option. The key corresponds to the key number you specify in the **authentication-key** statement.

By default, the router or switch sends NTP version 4 packets to the remote system. To set the NTP version level to 1, 2 or 3, include the **version** option.

If you configure more than one remote system, you can mark one system preferred by including the **prefer** option:

```
peer address <key key-number> <version value> prefer;
```

---

### Configuring the Router or Switch to Operate in Broadcast Mode

To configure the local router or switch to operate in broadcast mode, include the **broadcast** statement at the **[edit system ntp]** hierarchy level:

```
[edit system ntp]
broadcast address <key key-number> <version value> <t看 value>;
```

Specify the broadcast address on one of the local networks or a multicast address assigned to NTP. You must specify an address, not a hostname. If the multicast address is used, it must be **224.0.1.1**.

To include an authentication key in all messages sent to the remote system, include the **key** option. The key corresponds to the key number you specify in the **authentication-key** statement.

By default, the router or switch sends NTP version 4 packets to the remote system. To set the NTP version level to 1, 2, or 3, include the **version** option.

---

### Configuring the Router or Switch to Operate in Server Mode

In server mode, the router or switch acts as an NTP server for clients when the clients are configured appropriately. The only prerequisite for "server mode" is that the router or switch must be receiving time from another NTP peer or server. No other configuration is necessary on the router or switch.



To configure the local router or switch to operate as an NTP server, include the following statements at the **[edit system ntp]** hierarchy level:

```
[edit system ntp]
authentication-key key-number type type value password;
server address <key key-number> <version value> <prefer>;
trusted-key [ key-numbers ];
```

Specify the address of the system acting as the time server. You must specify an address, not a hostname.

To include an authentication key in all messages sent to the time server, include the **key** option. The key corresponds to the key number you specify in the **authentication-key** statement.

By default, the router or switch sends NTP version 4 packets to the time server. To set the NTP version level to 1, or 2, or 3, include the **version** option.

If you configure more than one time server, you can mark one server preferred by including the **prefer** option.

The following example shows how to configure the router or switch to operate in server mode:

```
[edit system ntp]
authentication-key 1 type md5 value "$9$txEruBEreWx-wtuLNdboaUjH.T3AtOESe";
server 172.17.27.46 prefer;
trusted-key 1;
```

#### Related Documentation

- [NTP Time Server and Time Services Overview on page 33](#)
- [Example: Configuring NTP as a Single Time Source for Router and Switch Clock Synchronization on page 160](#)

## Configuring the NTP Time Server and Time Services (QFabric System)

To configure the external time server using the CLI:

1. Configure the IP address of the external time server.

```
[edit system ntp]
user@switch# set server address
```

For example, to set an IP address of 10.1.1.1 for your external time server:

```
user@switch# set server 10.1.1.1
```

2. (Optional) Configure the key number to encrypt authentication fields in packets that are sent to the external time server.

```
[edit system ntp]
user@switch# set server address key key-number
```

For example, to set a key number of 1:

```
user@switch# set server address key 1
```

3. (Optional) Specify the external time server as a preferred host. Doing this enables the switch to synchronize with the external time server.





**NOTE:** The switch can synchronize with the external time server, but the external time server cannot synchronize with the switch.

```
[edit system ntp]
```

```
user@switch# set server address prefer
```

4. (Optional) Specify the NTP version number to be used in outgoing NTP packets.

```
user@switch# set server address version
```

For example, to specify version 3:

```
user@switch# set server address version 3
```

#### Related Documentation

- [NTP Time Server and Time Services Overview \(QFabric System\) on page 34](#)
- [ntp on page 241](#)
- [server on page 253](#)

## Specifying the Physical Location of the Switch

To specify the physical location of the switch, specify the following options for the **location** statement at the **[edit system]** hierarchy level:

- **altitude *feet***—Number of feet above sea level.
- **building *name***—Name of the building, 1 to 28 characters in length. If the string contains spaces, enclose it in quotation marks (" ").
- **country-code *code***—Two-letter country code.
- **floor *number***—Floor in the building.
- **hcoord *horizontal-coordinate***—Bellcore Horizontal Coordinate.
- **lata *service-area***—Long-distance service area.
- **latitude *degrees***—Latitude in degree format.
- **longitude *degrees***—Longitude in degree format.
- **npa-nxx *number***—First six digits of the phone number (area code and exchange).
- **postal-code *postal-code***—Postal code.
- **rack *number***—Rack number.
- **vcoord *vertical-coordinate***—Bellcore Vertical Coordinate.

The following example shows how to specify the physical location of the switch:

```
[edit system]
location {
  altitude feet;
  building name;
  country-code code;
  floor number;
  hcoord horizontal-coordinate;
```



```

lata service-area;
latitude degrees;
longitude degrees;
npa-nxx number;
postal-code postal-code;
rack number;
vcoord vertical-coordinate;
}

```

**Related  
Documentation**

- [Example: Configuring the Name of the Switch, IP Address, and System ID on page 157](#)

## Configuring the Router or Switch to Listen for Broadcast Messages Using NTP

When you are using NTP, you can configure the local router or switch to listen for broadcast messages on the local network to discover other servers on the same subnet by including the **broadcast-client** statement at the **[edit system ntp]** hierarchy level:

```

[edit system ntp]
broadcast-client;

```

When the router or switch detects a broadcast message for the first time, it measures the nominal network delay using a brief client-server exchange with the remote server. It then enters *broadcast client* mode, in which it listens for, and synchronizes to, succeeding broadcast messages.

To avoid accidental or malicious disruption in this mode, both the local and remote systems must use authentication and the same trusted key and key identifier.

**Related  
Documentation**

- [Configuring the Router or Switch to Listen for Multicast Messages Using NTP on page 135](#)
- [Configuring the NTP Time Server and Time Services on page 131](#)
- [Example: Configuring NTP as a Single Time Source for Router and Switch Clock Synchronization on page 160](#)

## Configuring the Router or Switch to Listen for Multicast Messages Using NTP

When you are using NTP, you can configure the local router or switch to listen for multicast messages on the local network to discover other servers on the same subnet by including the **multicast-client** statement at the **[edit system ntp]** hierarchy level:

```

[edit system ntp]
multicast-client <address>;

```

When the router or switch receives a multicast message for the first time, it measures the nominal network delay using a brief client-server exchange with the remote server. It then enters *multicast client* mode, in which it listens for, and synchronizes to, succeeding multicast messages.

You can specify one or more IP addresses. (You must specify an address, not a hostname.) If you do, the router or switch joins those multicast groups. If you do not specify any addresses, the software uses **224.0.1.1**.



To avoid accidental or malicious disruption in this mode, both the local and remote systems must use authentication and the same trusted key and key identifier.

**Related  
Documentation**

- [Configuring the Router or Switch to Listen for Broadcast Messages Using NTP on page 135](#)
- [Configuring the NTP Time Server and Time Services on page 131](#)
- [Example: Configuring NTP as a Single Time Source for Router and Switch Clock Synchronization on page 160](#)

## Configuring System Alarms to Appear Automatically Upon Login

You can configure Juniper Networks routers and switches to run the **show system alarms** command whenever a user with the login class **admin** logs in to the router or switch. To do so, include the **login-alarms** statement at the **[edit system login class admin]** hierarchy level.

```
[edit system login class admin]
login-alarms;
```

For more information on the **show system alarms** command, see the Junos OS Operational Mode Commands.

**Related  
Documentation**

- System Alarms on J Series Routers
- [show system alarms on page 861](#)

## Configuring Time-Based User Access

The Junos OS enables you to configure time-based restrictions for user access to log in to a device. This is useful for restricting the time and duration of user logins for all users belonging to a login class. You can specify the days of the week when users can log in, the access start time, and the access end time.

- To configure user access on specific days of the week, without any restrictions on the duration of login, include the **allowed-days** statement only.

```
[edit system]
login {
  class class-name {
    allowed-days [ days-of-the-week ];
  }
}
```

- To configure user access on all the days of the week for a specific duration, include the **access-start** and **access-end** statements only.

```
[edit system]
login {
  class class-name {
    access-start HH:MM;
    access-end HH:MM;
  }
}
```



- To configure user access on specific days of the week for a specified duration, include the **allowed-days**, **access-start**, and **access-end** statements.

```
[edit system]
login {
  class class-name {
    allowed-days [ days-of-the-week ];
    access-start HH:MM;
    access-end HH:MM;
  }
}
```

Specify the start time and end time in **HH:MM** (24-hour) format, where **HH** represents the hours and **MM** represents the minutes.



**NOTE:** Access start time and end time that spans across 12:00 AM on a specified day results in the user having access until the next day, even if the access day is not explicitly configured. For instance, the following configuration results in the user having access until 6:00 AM on Tuesday and Thursday, although the **allowed-days** statement specifies access only on Monday and Wednesday:

```
[edit system]
login {
  class operator-night-shift {
    allowed-days [ monday wednesday ];
    access-start 2000;
    access-end 0600;
  }
}
```

#### Related Documentation

- Examples: Configuring Time-Based User Access
- Defining Junos OS Login Classes
- access-end
- access-start
- allowed-days
- [access-end on page 200](#)
- [access-start on page 200](#)
- [allowed-days on page 203](#)

## Configuring the Timeout Value for Idle Login Sessions

An idle login session is one in which the CLI operational mode prompt is displayed but there is no input from the keyboard. By default, a login session remains established until a user logs out of the router or switch, even if that session is idle. To close idle sessions automatically, you must configure a time limit for each login class. If a session established



by a user in that class remains idle for the configured time limit, the session automatically closes.

To define the timeout value for idle login sessions, include the **idle-timeout** statement at the **[edit system login class *class-name*]** hierarchy level:

```
[edit system login class class-name]  
idle-timeout minutes;
```

Specify the number of minutes that a session can be idle before it is automatically closed.

If you have configured a timeout value, the CLI displays messages similar to the following when timing out an idle user. It starts displaying these messages 5 minutes before timing out the user.

```
user@host# Session will be closed in 5 minutes if there is no activity.  
Warning: session will be closed in 1 minute if there is no activity  
Warning: session will be closed in 10 seconds if there is no activity  
Idle timeout exceeded: closing session
```

If you configure a timeout value, the session closes after the specified time has elapsed, unless the user is running telnet or monitoring interfaces using the **monitor interface** or **monitor traffic** command.

- Related Documentation**
- Defining Junos OS Login Classes
  - idle-timeout
  - [idle-timeout on page 229](#)

## Configuring a QFX3500 Device as a Standalone Switch

If you are using the QFX3500 device as a standalone switch, you must perform the initial configuration of the QFX3500 device through the console port using the command-line interface (CLI). If you are using the QFX3500 as a Node device in a QFX3000 QFabric system, you instead perform the initial setup of a QFabric system on a QFX3100 Director device (see Performing the QFabric System Initial Setup on a QFX3100 Director Group).

Before you begin connecting and configuring a QFX3500 device, set the following parameter values on the console server or PC:

- Baud Rate—9600
- Flow Control—None
- Data—8
- Parity—None
- Stop Bits—1
- DCD State—Disregard



To connect and configure the device from the console:

1. Connect the console port to a laptop or PC using the supplied RJ-45 cable and RJ-45 to DB-9 adapter. The console (**CON**) port is located on the front panel of the device.
2. Log in as **root**. There is no password. If the software booted before you connected to the console port, you might need to press the Enter key for the prompt to appear.

```
Login: root
```

3. Start the CLI.

```
root@% cli
```

4. Enter configuration mode.

```
root> configure
```

5. Add a password to the root administration user account.

```
[edit]
```

```
root@# set system root-authentication plain-text-password
```

```
New password: password
```

```
Retype new password: password
```

6. (Optional) Configure the name of the device. If the name includes spaces, enclose the name in quotation marks (" ").

```
[edit]
```

```
root@# set system host-name host-name
```

7. Configure the default gateway.

```
[edit]
```

```
root@# set routing-options static route default next-hop address
```

8. Configure the IP address and prefix length for the device management interface.

```
[edit]
```

```
root@# set interfaces me0 unit 0 family inet address address/prefix-length
```



**CAUTION:** Configuring the two management Ethernet interfaces within the same subnet is not supported.



**NOTE:** The management ports are on the front panel of the QFX3500 device. They are labeled C0 and C1 on the front panel. In the CLI they are referred to as me0 and me1.

9. (Optional) Configure the static routes to remote prefixes with access to the management port.

```
[edit]
```

```
root@# set routing-options static route remote-prefix next-hop destination-ip retain no-readvertise
```

10. Enable telnet service.

```
[edit]
```

```
root@# set system services telnet
```





**NOTE:** When Telnet is enabled, you cannot log in to a QFX3500 device through Telnet using root credentials. Root login is allowed only for SSH access.

11. Commit the configuration to activate it on the device.

```
[edit]
root@# commit
```

**Related  
Documentation**

- Installing and Connecting a QFX3500 Device
- QFX3000-G QFabric System Installation Overview
- Understanding QFX3000-G QFabric System Hardware Configurations

## Creating an Emergency Boot Device for a QFX Series Device

If Junos OS on the QFX Series is damaged in some way that prevents the software from loading properly, you can use an emergency boot device to repartition the primary disk and load a fresh installation of Junos OS. Use the following procedure to create an emergency boot device.

Before you begin, you need to download the installation media image for your device and Junos OS release from <http://www.juniper.net/customers/support/>.



**NOTE:** In the following procedure, we assume that you are creating the emergency boot device on a QFX3500 device. You can create the emergency boot device on another Juniper Networks switch or router, or any PC or laptop that supports Linux. The steps you take to create the emergency boot device vary, depending on the device.

To create an emergency boot device from a QFX3500 device:

1. Use FTP to copy the installation media image into the `/var/tmp` directory on the QFX3500 device.
2. Insert a USB device into the USB port.
3. From the Junos OS command-line interface (CLI), start the shell:

```
user@device> start shell
%
```

4. Switch to the root account using the `su` command:

```
% su
Password: password
```



**NOTE:** The password is the root password for the QFX3500 device. If you logged in to the device as root, you do not need to perform this step.



5. Enter the following command:

```
root@device% dd if=/var/tmp/filename of=/dev/da1 bs=16k
```

The device writes the installation media image to the USB device:

```
root@device% dd if=/var/tmp/install-media-qfx3500.junos_11.1 of=/dev/da1 bs=16k
11006+1 records in
11006+1 records out
180332544 bytes transferred in 71.764266 secs (2512846 bytes/sec)
```

6. Log out of the shell:

```
root@device% exit
% exit
user@device>
```

#### Related Documentation

- [USB Port Specifications for the QFX Series](#)
- [Performing a Recovery Installation on a QFX3008-I, QFX3600-I, QFX3600, or QFX3500 Device on page 85](#)
- [Performing a QFabric System Recovery Installation on the Director Group on page 87](#)

## Creating a Snapshot and Using It to Boot a QFX Series Switch

The system snapshot feature takes a “snapshot” of the files currently used to run the QFX Series switch—the complete contents of the `/config` and `/var` directories, which include the running Juniper Networks Junos OS, the active configuration, and the rescue configuration—and copies all of these files into an alternate (internal, meaning internal flash, or an external, meaning USB flash) memory source. You can then use these snapshots to boot the switch at the next bootup or as a backup boot option.

This topic includes the following tasks:

- [Creating a Snapshot on a USB Flash Drive and Using It to Boot the Switch on page 141](#)
- [Creating a Snapshot on an Internal Flash Drive and Using it to Boot the Switch on page 142](#)

### Creating a Snapshot on a USB Flash Drive and Using It to Boot the Switch

A snapshot can be created on USB flash memory after a switch is booted using files stored in internal memory.

Ensure that you have the following tools and parts available before creating a snapshot on a USB Flash drive:

- A USB flash drive that meets the QFX Series switch USB port specifications. See [USB Port Specifications for the QFX Series](#).

To create a snapshot on USB flash memory and use it to boot the switch:

1. Place the snapshot into USB flash memory:

```
user@switch> request system snapshot partition
```





**NOTE:** This example uses the `partition` option. If you have already created a partition for the snapshot, you don't need to use the `partition` option.

2. (Optional) Perform this step if you want to boot the switch now using the snapshot stored on the external USB flash drive. If you created the snapshot as a backup, do not perform this step.
  - To reboot the switch using the most recently created snapshot:  
`user@switch> request system reboot`
  - To reboot the switch using a snapshot in a specific partition on the USB flash drive:  
`user@switch> request system reboot slice 1`

### Creating a Snapshot on an Internal Flash Drive and Using it to Boot the Switch

---

A snapshot can be created on internal memory after a switch is booted using files stored in external memory.

To create a snapshot in internal memory and use it to boot the switch:

1. Place the snapshot files in internal memory:  
`user@switch> request system snapshot partition`



**NOTE:** This example uses the `partition` option. If you have already created a partition for the snapshot, you don't need to use the `partition` option.

2. (Optional) Perform this step if you want to boot the switch now using the newly created snapshot. If you created the snapshot as a backup, do not perform this step.
  - To reboot the switch using the most recently created snapshot:  
`user@switch> request system reboot`
  - To reboot the switch using a snapshot in a specific partition in internal memory:  
`user@switch> request system reboot slice 1`

#### Related Documentation

- Verifying That a System Snapshot Was Created on a QFX Series Switch
- Understanding System Snapshot on QFX Series Switches

### Including the Year or Millisecond in Timestamps

By default, the timestamp recorded in a standard-format system log message specifies the month, date, hour, minute, and second when the message was logged, as in the following example:

Aug 21 12:36:30



To include the year, the millisecond, or both in the timestamp, include the **time-format** statement at the **[edit system syslog]** hierarchy level:

```
[edit system syslog]
time-format (year | millisecond | year millisecond);
```

However, the timestamp for traceoption messages is specified in milliseconds by default, and is independent of the **[edit system syslog time-format]** statement.

The modified timestamp is used in messages directed to each destination configured by a **file**, **console**, or **user** statement at the **[edit system syslog]** hierarchy level, but not to destinations configured by a **host** statement.

The following example illustrates the format for a timestamp that includes both the millisecond (**401**) and the year (**2006**):

```
Aug 21 12:36:30.401 2006
```



**NOTE:** Messages logged in structured-data format include the year and millisecond by default. If you include the structured-data statement at the **[edit system syslog file filename]** hierarchy level along with the time-format statement, the time-format statement is ignored and messages are logged in structured-data format.

For information about the structured-data statement, see *Logging Messages in Structured-Data Format*. For information about the contents of a structured-data message, see the *Junos OS System Log Messages Reference*.

- Related Documentation**
- [Single-Chassis System Logging Configuration Overview](#)
  - [Examples: Configuring System Logging](#)

## Mapping the Hostname of the Switch to IP Addresses

To map a hostname of a switch to one or more IP addresses, include the **inet** statement at the **[edit system static-host-mapping hostname]** hierarchy level:

```
[edit system]
static-host-mapping {
  hostname {
    inet [ addresses ];
    alias [ aliases ];
  }
}
```

**hostname** is the name specified by the **host-name** statement at the **[edit system]** hierarchy level.

For each host, you can specify one or more aliases.

- Related Documentation**
- [Configuring Basic Router or Switch Properties](#)
  - [Configuring the Domain Name for the Router or Switch on page 124](#)



- Example: Configuring the Name of the Router, IP Address, and System ID
- [static-host-mapping on page 257](#)

## Methods for Configuring Junos OS

You can use any of the methods shown in [Table 31 on page 144](#) to configure Junos OS:

**Table 31: Methods for Configuring Junos OS**

Method	Description
Command-line interface (CLI)	Create the configuration for the device using the CLI. You can enter commands from a single command line, and scroll through recently executed commands.
ASCII file	Load an ASCII file containing a configuration that you created earlier, either on this system or on another system. You can then activate and run the configuration file, or you can edit it using the CLI and then activate it.
J-Web graphical user interface (GUI)	Use the J-Web graphical user interface (GUI) to configure the device. J-Web enables you to monitor, configure, troubleshoot, and manage the router on a client by means of a Web browser. The J-Web GUI is preinstalled on J Series Services Routers and is an optional software package that can be installed on M Series and T Series routers. J-Web is not available for the QFX Series.
Junos XML management protocol (API)	Use Junos XML protocol Perl client modules to develop custom applications for configuring information on devices that run Junos OS. Client applications use the Junos XML management protocol to request and change configuration information on Juniper Networks J Series, M Series, and T Series routers. The Junos XML management protocol is customized for Junos OS, and operations in the API are equivalent to those in the Junos OS CLI.
NETCONF application programming interface (API)	Use NETCONF Perl client modules to develop custom applications for configuring information on devices that run Junos OS. Client applications use the NETCONF XML management protocol to request and change configuration information on Juniper Networks J Series, M Series, and T Series routers. The NETCONF XML management protocol includes features that accommodate the configuration data models of multiple vendors.
Configuration commit scripts	Create scripts that run at commit time to enforce custom configuration rules. Commit scripts are written in Extensible Stylesheet Language Transformations (XSLT). Commit scripts are not available for the QFX Series.

The following sections contain complete descriptions of the methods you can use to configure Junos OS:

- [Junos OS Command-Line Interface \(CLI\) on page 145](#)
- [ASCII File on page 145](#)



- [J-Web Package on page 145](#)
- [Junos XML Management Protocol Software on page 146](#)
- [NETCONF XML Management Protocol Software on page 146](#)
- [Configuration Commit Scripts on page 146](#)

### Junos OS Command-Line Interface (CLI)

The Junos OS CLI is a straightforward command interface. You use Emacs-style keyboard sequences to move around on a command line and scroll through a buffer that contains recently executed commands. You type commands on a single line, and the commands are executed when you press the Enter key. The CLI also provides command help and command completion. For more information about the CLI, see the CLI User Guide and Junos OS Operational Mode Commands.

### ASCII File

You can load an ASCII file containing a configuration that you created earlier, either on this system or another system. You can then activate and run the configuration file as is, or you can edit it using the CLI and then activate it.

### J-Web Package

As an alternative to entering CLI commands, the Junos OS supports the J-Web graphical user interface (GUI). The J-Web user interface enables you to monitor, configure, troubleshoot, and manage the router on a client by means of a Web browser with Hypertext Transfer Protocol (HTTP) or HTTP over Secure Sockets Layer (HTTPS) enabled.

The J-Web user interface is preinstalled on J Series Services Routers. It is provided as an optional, licensed software package (**jweb** package) on M Series and T Series routers. The **jweb** package is not included in **jinstall** and **jbundle** software bundles. It must be installed separately. To install the package on M Series and T Series routers, follow the procedure described in the Installation and Upgrade Guide.

J-Web supports weak (56-bit) encryption by default. This enables international customers to install J-Web and use HTTPS connections for J-Web access. Domestic customers can also install the **jcrypto** strong encryption package. This package automatically overrides the weak encryption. For more information about the J-Web GUI, see the *J-Web Interface User Guide*.



**NOTE:** Because the J-Web package is bundled separately from other packages, it is possible to have a version mismatch between J-Web and other Junos OS packages you have installed.

To check for a version mismatch, use the **show system alarms** CLI command. If the version number does not match exactly, a system alarm appears. For example, if you install the 7.4R1.2 **jroute** package and the 7.4R1.1 **jweb** package, an alarm is activated. For more information on the **show system alarms** command, see the Junos OS Operational Mode Commands.



### Junos XML Management Protocol Software

---

The Junos XML management protocol is an Extensible Markup Language (XML) application that client applications use to request and change configuration information on Juniper Networks J Series, M Series, MX Series, and T Series routers. This API is customized for Junos OS, and operations in the API are equivalent to Junos OS CLI configuration mode commands. The Junos XML management protocol includes a set of Perl modules that enable client applications to communicate with a Junos XML protocol server on the router. The Perl modules are used to develop custom applications for configuring and monitoring Junos OS.

For a complete description of how to use Junos XML and Junos XML management protocol software, see the *Junos XML Management Protocol Guide*.

### NETCONF XML Management Protocol Software

---

The NETCONF XML management protocol is an Extensible Markup Language (XML) application that client applications can use to request and change configuration information on Juniper Networks J Series, M Series, MX Series, and T Series routers. This API is customized for Junos OS, and includes features that accommodate the configuration data models of multiple vendors. The NETCONF XML management protocol includes a set of Perl modules that enable client applications to communicate with a NETCONF server on the router. The Perl modules are used to develop custom applications for configuring and monitoring Junos OS.

For a complete description of how to use Junos XML and NETCONF XML management protocol software, see the *NETCONF XML Management Protocol Guide*.

### Configuration Commit Scripts

---

You can create and use scripts that run at commit time to enforce custom configuration rules. If a configuration breaks the custom rules, the script can generate actions that the Junos OS performs. These actions include:

- Generating custom error messages
- Generating custom warning messages
- Generating custom system log messages
- Making changes to the configuration

Configuration commit scripts also enable you to create macros, which expand simplified custom aliases for frequently used configuration statements into standard Junos configuration statements. Commit scripts are written in Extensible Stylesheet Language Transformations (XSLT). For more information, see the Junos OS Configuration and Operations Automation Guide.

#### Related Documentation

- Junos OS Configuration from External Devices



## Modifying the Default Time Zone for a Router or Switch Running Junos OS

The default local time zone on the router or switch is UTC (Coordinated Universal Time, formerly known as Greenwich Mean Time, or GMT).

- To modify the local time zone, include the **time-zone** statement at the **[edit system]** hierarchy level:

```
[edit system]
time-zone (GMT hour-offset | time-zone);
```

You can use the **GMT *hour-offset*** option to set the time zone relative to UTC (GMT) time. By default, ***hour-offset*** is 0. You can configure this to be a value from -14 to +12.

You can also specify the **time-zone** value as a string such as PDT (Pacific Daylight Time) or WET (Western European Time), or specify the continent and major city.



**NOTE:** Junos OS complies with the POSIX time-zone standard, which is counter-intuitive to the way time zones are generally indicated relative to UTC. A time zone ahead of UTC (east of the Greenwich meridian) is commonly indicated as GMT +*n*; for example, the Central European Time (CET) zone is indicated as GMT +1. However, this is not true for POSIX time zone designations. POSIX indicates CET as GMT-1. If you include the **set system time-zone GMT+1** statement for a router in the CET zone, your router time will be set to one hour behind GMT, or two hours behind the actual CET time. For this reason, you might find it easier to use the POSIX time-zone strings, which you can list by entering **set system time-zone ?**.

For the time zone change to take effect for all processes running on the router or switch, you must reboot the router or switch.

The following example shows how to change the current time zone to **America/New\_York**:

```
[edit]
user@host# set system time-zone America/New_York
[edit]
user@host# show
system {
    time-zone America/New_York;
}
```

### Related Documentation

- [NTP Time Server and Time Services Overview on page 33](#)
- [Setting a Custom Time Zone on Routers or Switches Running Junos OS on page 150](#)

## Rebooting and Halting a QFX Series Product

To reboot the switch, issue the **request system reboot** command.

```
user@switch> request system reboot ?
Possible completions:
<[Enter]>           Execute this command
```



at	Time at which to perform the operation
in	Number of minutes to delay before operation
media	Boot media for next boot
message	Message to display to all users
	Pipe through a command

```
user@switch> request system reboot
Reboot the system ? [yes,no] (no) yes
Rebooting switch
```

Similarly, to halt the switch, issue the **request system halt** command.



**CAUTION:** Before entering this command, you must have access to the switch's console port in order to bring up the Routing Engine.

```
user@switch> request system halt ?
Possible completions:
<[Enter]>      Execute this command
at             Time at which to perform the operation
in            Number of minutes to delay before operation
media         Boot media for next boot
message       Message to display to all users
|             Pipe through a command
```



**NOTE:** When you issue this command on an individual component in a QFabric system, you will receive a warning that says “Hardware-based members will halt, Virtual Junos Routing Engines will reboot.” If you want to halt only one member, use the member option. You cannot issue this command from the QFabric CLI.

Issuing the **request system halt** command on the switch halts the Routing Engine. To reboot a Routing Engine that has been halted, you must connect through the console.

#### Related Documentation

- [clear system reboot on page 290](#)
- [request system reboot on page 344](#)
- [request system halt on page 331](#)
- [request system power-off on page 340](#)
- [Connecting a QFX Series Device to a Management Console](#)

## Reverting to the Default Factory Configuration

If for any reason the current active configuration fails, you can revert to the default factory configuration. The default factory configuration contains the basic configuration settings. This is the first configuration of the switch, and it is loaded when the switch is first installed and powered on.



The **load factory default** command is a standard Junos OS configuration command. This configuration command replaces the current active configuration with the default factory configuration.

To revert the switch to the rescue configuration:

1. `[edit]`  
`user@switch# load factory-default`  
`[edit]`  
`user@switch# delete system commit factory-settings`  
`[edit]`  
`user@switch# commit`

**Related Documentation**

- [Understanding Configuration Files on page 1113](#)
- [Loading a Previous Configuration File on page 1122](#)
- [Reverting to the Rescue Configuration on page 150](#)

## Reverting to the Default Factory Configuration by Using the **request system zeroize** Command

The **request system zeroize** command is a standard Junos OS operational mode command that removes all configuration information and resets all key values. The operation unlinks all user-created data files, including customized configuration and log files, from their directories. The switch then reboots and reverts to the factory-default configuration.

To completely erase user-created data so that it is unrecoverable, use the **request system zeroize media** command.



**CAUTION:** Before issuing **request system zeroize**, use the **request system snapshot** command to back up the files currently used to run the switch to a secondary device.

To revert to the factory-default configuration by using the **request system zeroize** command:

1. `user@switch> request system zeroize`  
`warning: System will be rebooted and may not boot without configuration`  
`Erase all data, including configuration and log files? [yes,no] (yes)`
2. Type **yes** to remove configuration and log files and revert to the factory default configuration.
3. Complete the initial configuration of the switch. See or [“Configuring a QFX3500 Device as a Standalone Switch” on page 138](#)

**Related Documentation**

- [request system zeroize on page 387](#)



## Reverting to the Rescue Configuration

If someone inadvertently commits a configuration that denies management access to a QFX Series product and the console port is not accessible, you can overwrite the invalid configuration and replace it with the rescue configuration. The rescue configuration is a previously committed, valid configuration.

To revert the switch to the rescue configuration:

1. Enter the **load override** command.

```
[edit]
user@switch# load override filename
```

2. Commit your changes.

```
[edit]
user@switch# commit filename
```

### Related Documentation

- [Setting or Deleting the Rescue Configuration on page 1131](#)
- [Reverting to the Default Factory Configuration on page 148](#)
- [Configuration File Terms on page 29](#)

## Saving Core Files Generated by Junos OS Processes

By default, when an internal Junos OS process generates a core file, the file and associated context information are saved for debugging purposes in a compressed tar file named **/var/tmp/process-name.core.core-number.tgz**. The contextual information includes the configuration and system log message files.

- To disable the saving of core files and associated context information:

```
[edit system]
no-saved-core-context;
```

- To save the core files only:

```
[edit system]
saved-core-files number;
```

Where **number** is the number of core files to save and can be a value from 1 through 10.

- To save the core files along with the contextual information:

```
[edit system]
saved-core-context;
```

### Related Documentation

- [Viewing Core Files from Junos OS Processes on page 156](#)

## Setting a Custom Time Zone on Routers or Switches Running Junos OS

You can update the time zone database information on routers or switches running Junos OS. This feature simplifies time zone management in devices running Junos OS by allowing



for future unforeseen time zone database adjustments. You can configure your router or switch to use a custom time zone database file that you create to meet your requirements by editing an existing time zone database file.

Tasks for setting a custom time zone are:

1. [Importing and Installing Time Zone Files on page 151](#)
2. [Configuring a Custom Time Zone on page 152](#)

### Importing and Installing Time Zone Files

To import and install time zone files, follow these steps:

1. Download the time zone files archive and untar them to a temporary directory such as `/var/tmp`:

```
# mkdir -p /var/tmp/tz && cd /var/tmp/tz && rm *
# wget 'ftp://ftp.iana.org/tz/tzdata-latest.tar.gz'
# tar xvfz tzdata*.gz
africa
antarctica
asia
australasia
europe
northamerica
southamerica
pacificnew
etcetera
factory
backward
systemv
solar87
solar88
solar89
iso3166.tab
zone.tab
leapseconds
yearistype.sh
```



**NOTE:** If needed, you can edit the above untarred files to create or modify time zones.

2. Select the names of time zone files to compile and feed them to the following script. For example, to generate **northamerica** and **asia** tz files:

```
# /usr/libexec/ui/compile-tz northamerica asia
```

3. Enable the use of the generated tz files using the CLI:

```
[edit]
# set system use-imported-time-zones
[edit]
# set system time-zone ?
```

This should show the newly generated tz files in `/var/db/zoneinfo/`.



4. Set the time zone and commit the configuration:

```
[edit]
# set system time-zone <your-time-zone>
# commit
```

5. Verify that the time zone change has taken effect:

```
[edit]
# run show system uptime
```

---

### Configuring a Custom Time Zone

To use a custom time zone, follow these steps:

1. Download a time zones archive (from a known or designated source) to the router or switch. Compile the time zone archive using the *zic* time zone compiler, which generates *tz* files.
2. Using the CLI, configure the router or switch to enable the use of the generated *tz* files as follows:

```
[edit]
user@host# set system use-imported-time-zones
```

3. Display the imported time zones (saved in the directory */var/db/zoneinfo/*):

```
[edit]
user@host# set system time-zone ?
```

If you do not configure the router to use imported time zones, the Junos OS default time zones are shown (saved in the directory */usr/share/zoneinfo/*).

#### Related Documentation

- [Modifying the Default Time Zone for a Router or Switch Running Junos OS](#)
- [NTP Overview](#)
- [NTP Time Server and Time Services Overview on page 33](#)
- [Example: Configuring NTP as a Single Time Source for Router and Switch Clock Synchronization on page 160](#)
- [use-imported-time-zones](#)

### Setting the Date and Time

1. Enter operational mode in the CLI.
2. Enter the following command:

```
user@switch> set date YYYYMMDDHHMM.ss source-address
```

For example, the following command sets the date and time.

```
user@switch# set date 201102151010.55
```

3. To set the date and time from an NTP server, enter the following command:

```
user@switch# set date ntp servers
```



For example, the following command sets the date and time from an NTP server:

```
user@switch# set date ntp 200.40.40.1
```

4. To set the date and time from more than one NTP server, enter the same command:

```
user@switch# set date ntp servers
```

For example, the following command sets the date and time from more than one NTP server:

```
user@switch# set date ntp 200.40.40.1 200.40.40.2
```

**Related Documentation**

- [set date](#)

## Specifying Access Privileges for Junos OS Operational Mode Commands

You can specify extended regular expressions by using the **allow-commands** and **deny-commands** statements to define a user's access privileges to individual operational mode commands. Doing so takes precedence over a login class permissions bit set for a user. You can include one **deny-commands** and one **allow-commands** statement in each login class.

To explicitly provide use of an individual operational mode command that would otherwise be denied, include the **allow-commands** statement at the **[edit system login class *class-name*]** hierarchy level:

```
[edit system login class class-name]
  allow-commands "regular-expression";
```

To explicitly deny access to an individual operational mode command that would otherwise be supported, include the **deny-commands** statement at the **[edit system login class *class-name*]** hierarchy level:

```
[edit system login class class-name]
  deny-commands "regular-expression";
```

If the regular expression contains any spaces, operators, or wildcard characters, enclose the expression in quotation marks. Regular expressions are not case-sensitive.

```
allow-commands "show interfaces";
```



**NOTE:** Modifiers are not supported within the regular expression string to be matched. If a modifier is used, then nothing is matched.

For example, the deny command **set protocols** does not match anything, whereas **protocols** matches *protocols*.

Explicitly providing access to operational mode commands using the **allow-commands** statement adds to the regular permissions set using the **permissions** statement. Likewise, explicitly denying access to operational mode commands using the **deny-commands** statement removes permissions for the specified commands from the default permissions provided by the **permissions** statement.



For example, if a login class has the permission **view** and the **allow-commands** statement includes the **request system software add** command, the specified login class user can install software, in addition to the permissions specified by the **view** permissions flag. Likewise, if a login class has the permission **all** and the **deny-commands** statement includes the **request system software add** command, the specified login class user can perform all operations allowed by the **all** permissions flag, except installing software using the **request system software add** command.

If you allow and deny the same commands, the **allow-commands** permissions take precedence over the permissions specified by **deny-commands**. For example, if you include **allow-commands "request system software add"** and **deny-commands "request system software add"**, the login class user is allowed to install software using the **request system software add** command.

If you specify a regular expression for **allow-commands** and **deny-commands** with two different variants of a command, the longest match is always executed.

For example, if you specify a regular expression for **allow-commands** with the **commit-synchronize** command and a regular expression for **deny-commands** with the **commit** command, users assigned to such a login class would be able to issue the **commit synchronize** command, but not the **commit** command. This is because **commit-synchronize** is the longest match between **commit** and **commit-synchronize**, and it is specified for **allow-commands**.

Likewise, if you specify a regular expression for **allow-commands** with the **commit** command and a regular expression for **deny-commands** with the **commit-synchronize** command, users assigned to such a login class would be able to issue the **commit** command, but not the **commit-synchronize** command. This is because **commit-synchronize** is the longest match between **commit** and **commit-synchronize**, and it is specified for **deny-commands**.

Anchors are required when specifying complex regular expressions with **allow-commands** or **deny-commands** statements. For example, when specifying multiple commands using the pipe (|) symbol for **allow-commands**, the following syntax is incorrect:

**allow-commands = "(monitor.\*)"|(ping.\*)"|(show.\*)"|(exit)"** . Instead, you must specify the expression using the following syntax: **allow-commands = "(^monitor) | (^ping) | (^show) | (^exit)"** OR **allow-commands = "^ (monitor | ping | show | exit)"**

#### Related Documentation

- [Example: Configuring Access Privileges for Operational Mode Commands on page 1246](#)
- [Regular Expressions for Allowing and Denying Junos OS Operational Mode Commands on page 1206](#)
- [allow-commands](#)
- [deny-commands](#)



## Synchronizing and Coordinating Time Distribution Using NTP

Using NTP to synchronize and coordinate time distribution in a large network involves these tasks:

1. [Configuring NTP on page 155](#)
2. [Configuring the NTP Boot Server on page 155](#)
3. [Specifying a Source Address for an NTP Server on page 155](#)

### Configuring NTP

- To configure NTP on the router or switch, include the **ntp** statement at the **[edit system]** hierarchy level:

```
[edit system]
ntp {
  authentication-key number type type value password;
  boot-server (address | hostname);
  broadcast <address> <key key-number> <version value> <ttl value>;
  broadcast-client;
  multicast-client <address>;
  peer address <key key-number> <version value> <prefer>;
  server address <key key-number> <version value> <prefer>;
  source-address source-address;
  trusted-key [ key-numbers ];
}
```

### Configuring the NTP Boot Server

When you boot the router or switch, it issues an **ntpdate** request, which polls a network server to determine the local date and time. You need to configure a server that the router or switch uses to determine the time when the router or switch boots. Otherwise, NTP will not be able to synchronize to a time server if the server's time appears to be very far off of the local router's or switch's time.

- To configure the NTP boot server, include the **boot-server** statement at the **[edit system ntp]** hierarchy level:

```
[edit system ntp]
boot-server (address | hostname);
```

Specify either the IP address or the hostname of the network server.

### Specifying a Source Address for an NTP Server

For IP version 4 (IPv4), you can specify that if the NTP server configured at the **[edit system ntp]** hierarchy level is contacted on one of the loopback interface addresses, the reply always uses a specific source address. This is useful for controlling which source address NTP uses to access your network when it is either responding to or sending an NTP client request from your network.



To configure the specific source address that the reply will always use, and the source address that requests initiated by NTP server will use, include the **source-address** statement at the **[edit system ntp]** hierarchy level:

```
[edit system ntp]
source-address source-address;
```

**source-address** is a valid IP address configured on one of the router or switch interfaces.



**NOTE:** If a firewall filter is applied on the loopback interface, ensure that the source address specified for the NTP server at the **[edit system ntp]** hierarchy level is explicitly included as one of the match criteria in the firewall filter. This enables the Junos OS to accept traffic on the loopback interface from the specified source address.

The following example shows a firewall filter with the source address 10.0.10.100 specified in the **from** statement included at the **[edit firewall filter firewall-filter-name]** hierarchy:

```
[edit firewall filter Loopback-Interface-Firewall-Filter]
term Allow-NTP {
  from {
    source-address {
      172.17.27.46/32; // IP address of the NTP server
      10.0.10.100/32; // Source address specified for the NTP server
    }
  }
  then accept;
}
```

If no source address is configured for the NTP server, include the primary address of the loopback interface in the firewall filter.

#### Related Documentation

- [NTP Time Server and Time Services Overview on page 33](#)
- [Example: Configuring NTP as a Single Time Source for Router and Switch Clock Synchronization on page 160](#)

## Viewing Core Files from Junos OS Processes

When an internal Junos process generates a core file, the output found at **/var/crash/** and **/var/tmp/** can now be viewed. This provides a quick method of finding core issues across large networks.

Use the CLI command **show system core-dumps** to view core files.

```
root@host> show system core-dumps
-rw----- 1 root  wheel  268369920 Jun 18 17:59 /var/crash/vmcore.0
-rw-rw---- 1 root  field   3371008 Jun 18 17:53 /var/tmp/rpd.core.0
-rw-r--r-- 1 root  wheel   27775914 Jun 18 17:59 /var/crash/kernel.0
```



- Related Documentation**
- [Saving Core Files from Junos OS Processes](#)
  - [Saving Core Files Generated by Junos OS Processes on page 150](#)

## Configuration Examples

- [Example: Configuring the Domain Name for the Router or Switch on page 157](#)
- [Example: Configuring the Name of the Switch, IP Address, and System ID on page 157](#)
- [Example: Configuring NTP on page 158](#)
- [Example: Configuring NTP as a Single Time Source for Router and Switch Clock Synchronization on page 160](#)

### Example: Configuring the Domain Name for the Router or Switch

The following example shows how to configure the router or switch domain name:

```
[edit]
user@host# set system domain-name company.net
[edit]
user@host# show
system {
    domain-name company.net;
}
```

- Related Documentation**
- [domain-name on page 225](#)
  - [Configuring the Domain Name for the Router or Switch on page 124](#)

### Example: Configuring the Name of the Switch, IP Address, and System ID

The following example shows how to configure the switch name, map the name to an IP address and alias, and configure a system identifier:

```
[edit]
user@switcht# set system host-nameswitch-sj1
[edit]
user@switch# set system static-host-mapping switch-sj1 inet 192.168.1.77
[edit]
user@switcht# set system static-host-mapping switch-sj1 alias sj1
[edit]
user@switch# set system static-host-mapping switch-sj1 sysid 1921.6800.1077
[edit]
user@switcht# show
system {
    host-name switch-sj1;
    static-host-mapping {
        switch-sj1 {
            inet 192.168.1.77;
            alias sj1;
            sysid 1921.6800.1077;
        }
    }
}
```



```
}
```

**Related  
Documentation**

- [Configuring Basic Router or Switch Properties](#)

## Example: Configuring NTP

The Network Time Protocol (NTP) provides the mechanisms to synchronize time and coordinate time distribution in a large, diverse network. NTP uses a returnable-time design in which a distributed subnet of time servers operating in a self-organizing, hierarchical primary-secondary configuration synchronizes local clocks within the subnet and to national time standards by means of wire or radio. The servers also can redistribute reference time using local routing algorithms and time daemons.

This example shows how to configure NTP:

- [Requirements on page 158](#)
- [Overview on page 158](#)
- [Configuration on page 158](#)
- [Verification on page 159](#)

### Requirements

---

This example uses the following software and hardware components:

- Junos OS Release 11.1 or later
- A switch connected to a network on which an NTP boot server and NTP server reside

### Overview

---

Debugging and troubleshooting are much easier when the timestamps in the log files of all switches are synchronized, because events that span a network can be correlated with synchronous entries in multiple logs. We recommend using the Network Time Protocol (NTP) to synchronize the system clocks of your switch and other network equipment.

In this example, an administrator wants to synchronize the time in a switch to a single time source. We recommend using authentication to make sure that the NTP peer is trusted. The **boot-server** statement identifies the server from which the initial time of day and date are obtained when the router or switch boots. The **server** statement identifies the NTP server used for periodic time synchronization. The **authentication-key** statement specifies that an HMAC-Message Digest 5 (MD5) scheme is used to hash the key value for authentication, which prevents the switch from synchronizing with an attacker's host that is posing as the time server.

### Configuration

---

To configure NTP:



**CLI Quick Configuration** To quickly configure NTP, copy the following commands and paste them into the switch's terminal window:

```
[edit system]
set ntp boot-server 10.1.4.1
set ntp server 10.1.4.2
set ntp authentication-key 2 type md5 value "$9$aHlj8"
```

**Step-by-Step Procedure** To configure NTP :

1. Specify the boot server:  

```
[edit system]
user@switch# set ntp boot-server 10.1.4.1
```
2. Specify the NTP server:  

```
[edit system]
user@switch# set ntp server 10.1.4.2
```
3. Specify the key number, authentication type (MD5), and key for authentication:  

```
[edit system]
user@switch# set ntp authentication-key 2 type md5 value "$9$aHlj8"
```

**Results** Check the results:

```
[edit system]
user@switch# show
ntp {
  boot-server 10.1.4.1;
  authentication-key 2 type md5 value "$9$aHlj8"; ## SECRET-DATA
  server 10.1.4.2;
}
```

### Verification

To confirm that the configuration is correct, perform these tasks:

- [Checking the Time on page 159](#)
- [Displaying the NTP Peers on page 160](#)
- [Displaying the NTP Status on page 160](#)

### Checking the Time

**Purpose** Check the time that has been set on the switch.

**Action** Enter the **show system uptime** operational mode command to display the time.

```
user@switch> show system uptime
fpc0:
-----
Current time: 2009-06-12 12:49:03 PDT
System booted: 2009-05-15 06:24:43 PDT (4w0d 06:24 ago)
Protocols started: 2009-05-15 06:27:08 PDT (4w0d 06:21 ago)
Last configured: 2009-05-27 14:57:03 PDT (2w1d 21:52 ago) by admin1
12:49PM up 28 days, 6:24, 1 user, load averages: 0.05, 0.06, 0.01
```

**Meaning** The output shows that the current date and time are June 12, 2009 and 12:49:03 PDT. The switch booted 4 weeks, 6 hours, and 24 minutes ago, and its protocols were started



approximately 3 minutes before it booted. The switch was last configured by user **admin1** on May 27, 2009, and there is currently one user logged in to the switch.

The output also shows that the load average is 0.05 seconds for the last minute, 0.06 seconds for the last 5 minutes, and 0.01 seconds for the last 15 minutes.

### *Displaying the NTP Peers*

**Purpose** Verify that the time has been obtained from an NTP server.

**Action** Enter the **show ntp associations** operational mode command to display the NTP server from switch obtained its time.

```
user@switch> show ntp associations
      remote      refid      st t when poll reach  delay  offset  jitter
=====
*ntp5.domain1.ne .GPS.          1 u  414 1024  377   3.435   4.002   0.765
```

**Meaning** The asterisk (\*) in front of the NTP server name, or peer, indicates that the time is synchronized and obtained from this server. The delay, offset, and jitter are displayed in milliseconds.

### *Displaying the NTP Status*

**Purpose** View the configuration of the NTP server and the status of the system.

**Action** Enter the **show ntp status** operational mode command to view the status of the NTP.

```
user@switch> show ntp status
status=0644 leap_none, sync_ntp, 4 events, event_peer/strat_chg,
version="ntpd 4.2.0-a Mon Apr 13 19:09:05 UTC 2009 (1)",
processor="powerpc", system="JUNOS9.5R1.8", leap=00, stratum=2,
precision=-18, rootdelay=2.805, rootdispersion=42.018, peer=48172,
refid=172.17.28.5,
reftime=cddd397a.60e6d7bf Fri, Jun 12 2009 13:30:50.378, poll=10,
clock=cddd3b1b.ec5a2bb4 Fri, Jun 12 2009 13:37:47.923, state=4,
offset=3.706, frequency=-23.018, jitter=1.818, stability=0.303
```

**Meaning** The output shows status information about the switch and the NTP.

#### **Related Documentation**

- [NTP Time Server and Time Services Overview on page 33](#)
- [ntp on page 241](#)
- [Configuring the NTP Time Server and Time Services on page 131](#)
- Junos OS Operational Mode Commands
- *Junos OS Baseline Network Operations Guide*

## **Example: Configuring NTP as a Single Time Source for Router and Switch Clock Synchronization**

Debugging and troubleshooting are much easier when the timestamps in the log files of all the routers or switches are synchronized, because events that span the network can



be correlated with synchronous entries in multiple logs. We strongly recommend using the Network Time Protocol (NTP) to synchronize the system clocks of routers, switches, and other network equipment.

By default, NTP operates in an entirely unauthenticated manner. If a malicious attempt to influence the accuracy of a router or switch's clock succeeds, it could have negative effects on system logging, make troubleshooting and intrusion detection more difficult, and impede other management functions.

The following sample configuration synchronizes all the routers or switches in the network to a single time source. We recommend using authentication to make sure that the NTP peer is trusted. The **boot-server** statement identifies the server from which the initial time of day and date is obtained when the router boots. The **server** statement identifies the NTP server used for periodic time synchronization. The **authentication-key** statement specifies that an HMAC-Message Digest 5 (MD5) scheme should be used to hash the key value for authentication, which prevents the router or switch from synchronizing with an attacker's host posing as the time server.

```
[edit]
system {
  ntp {
    authentication-key 2 type md5 value "$9$aHlj8gqQ1gijyjhgiiliii"; # SECRET-DATA
    boot-server 10.1.4.1;
    server 10.1.4.2;
  }
}
```

#### Related Documentation

- [NTP Overview](#)
- [NTP Time Server and Time Services Overview on page 33](#)
- [authentication-key](#)
- [boot-server on page 211](#)
- [server on page 253](#)
- [show ntp associations on page 840](#)
- [show ntp status on page 842](#)

## Configuration Statements

- [QFX Series CLI Hierarchy on page 161](#)

### QFX Series CLI Hierarchy

This topic contains the full command-line interface (CLI) statement hierarchy for the QFX Series.

- [\[edit access\] Hierarchy on page 162](#)
- [\[edit accounting-options\] Hierarchy on page 162](#)
- [\[edit chassis\] Hierarchy on page 164](#)



- [\[edit class-of-service\] Hierarchy on page 165](#)
- [\[edit ethernet-switching-options\] Hierarchy on page 168](#)
- [\[edit fabric\] Hierarchy on page 169](#)
- [\[edit fc-fabrics\] Hierarchy on page 170](#)
- [\[edit fc-options\] Hierarchy on page 171](#)
- [\[edit firewall\] Hierarchy on page 171](#)
- [\[edit groups\] Hierarchy on page 172](#)
- [\[edit interfaces\] Hierarchy on page 172](#)
- [\[edit policy-options\] Hierarchy on page 178](#)
- [\[edit protocols\] Hierarchy on page 178](#)
- [\[edit security\] Hierarchy on page 191](#)
- [\[edit snmp\] Hierarchy on page 191](#)
- [\[edit system\] Hierarchy on page 194](#)
- [\[edit vlans\] Hierarchy on page 199](#)

---

### [\[edit access\] Hierarchy](#)

---

```
access {
  address-assignment
  pool pool-name
  address-pool pool-name
  profile profile-name {
    accounting {
      accounting-stop-on-access-deny;
      accounting-stop-on-failure;
      (authentication-order (ldap radius | none);
      order (radius | none);
    }
    radius {
      accounting-server [server-addresses];
      authentication-server [server-addresses];
    }
  }
}
```

---

### [\[edit accounting-options\] Hierarchy](#)

---

```
accounting-options {
  class-usage-profile profile-name {
    destination-classes {
      destination-class-name;
    }
    file filename;
    interval minutes;
    source-classes {
      source-class-name;
    }
  }
  file filename {
    archive-sites {
```



```

        site-name;
    }
    files number;
    nonpersistent;
    size bytes;
    start-time time;
    transfer-interval minutes;
}
filter-profile profile-name {
    counters {
        counter-name;
    }
    file filename;
    interval minutes;
}
interface-profile profile-name {
    fields {
        input-bytes;
        input-errors;
        input-multicast;
        input-packets;
        input-unicast;
        output-bytes;
        output-errors;
        output-multicast;
        output-packets;
        output-unicast;
        rpf-check-bytes;
        rpf-check-packets;
        rpf-check6-bytes;
        rpf-check6-packets;
        unsupported-protocol;
    }
    file filename;
    interval minutes;
}
mib-profile profile-name {
    file filename;
    interval minutes;
    object-names {
        mib-object-name;
    }
    operation (get | get-next | walk);
}
policy-decision-statistics-profile profile-name {
    application-aware-access-list-fields {
        address;
        application;
        application-group;
        input-bytes;
        input-interface;
        input-packets;
        mask;
        output-bytes;
        output-packets;
        subscriber-name;
    }
}

```



```
        timestamp;
        vrf-name;
    }
    file filename;
}
routing-engine-profile profile-name {
    fields {
        field-name;
    }
    file filename;
    interval minutes;
}
}
```

#### [\[edit chassis\] Hierarchy](#)

---

```
interconnect-device {
    alarm {
        interface-type {
            link-down (red | yellow | ignore);
        }
    }
    container-devices {
        device-count number;
    }
    craft-lockout {
        alarm {
            interface-type {
                link-down (red | yellow | ignore);
            }
        }
        container-devices {
            device-count number;
        }
        fpc slot {
            power (on | off);
        }
        routing-engine {
            on-disk-failure {
                disk-failure-action (halt | reboot);
            }
        }
    }
    fpc slot {
        power (on | off);
    }
    routing-engine {
        on-disk-failure {
            disk-failure-action (halt | reboot);
        }
    }
}
chassis {
    routing-engine {
        on-disk-failure {
            disk-failure-action (halt | reboot);
        }
    }
}
```



```

}
aggregated-devices {
  ethernet {
    device-count number;
  }
  alarm {
    interface-type {
      alarm-name (red | yellow | ignore);
    }
  }
}
fpc slot {
  pic pic-number {
    fibre-channel {
      port-range {
        port-range-low port-range-low port-range-high;
      }
    }
    xe {
      (port port-number | port-range port-range-low port-range-high);
    }
    xle {
      (port port-number | port-range port-range-low port-range-high);
    }
  }
}
}

```

#### [\[edit class-of-service\] Hierarchy](#)

```

class-of-service {
  classifiers {
    (dscp | dscp-ipv6 | ieee-802.1) classifier-name {
      import (classifier-name | default);
      forwarding-class class-name {
        loss-priority level {
          code-points [ aliases ] [ bit-patterns ];
        }
      }
    }
  }
  code-point-aliases {
    (dscp | dscp-ipv6 | ieee-802.1) {
      alias-name bits;
    }
  }
  congestion-notification-profile profile-name {
    input {
      ieee-802.1 {
        code-point [ code-point-bits ] {
          pfc {
            mru mru-value;
          }
        }
      }
    }
    cable-length cable-length-value;
  }
}

```



```
}
output {
  ieee-802.1 {
    code-point [code-point-bits] {
      flow-control-queue [queue | list-of-queues];
    }
  }
}
}
drop-profiles {
  profile-name {
    interpolate {
      fill-level low-value fill-level high-value drop-probability 0 drop-probability
        high-value;
    }
  }
}
}
forwarding-class class-name {
  loss-priority level {
    code-points [aliases ] [ bit-patterns ];
  }
}
forwarding-class class-name {
  scheduler scheduler-name;
}
forwarding-class-sets forwarding-class-set-name {
  class class-name;
}
forwarding-classes {
  class {
    class-name {
      queue-num queue-number <no-loss>;
    }
  }
}
}
host-outbound-traffic{
  forwarding-class class-name;
  dscp-code-point code-point;
}
}
interfaces {
  interface-name {
    congestion-notification-profile profile-name {
    }
    forwarding-class lossless-forwarding-class-name;
    forwarding-class-set forwarding-class-set-name {
      output-traffic-control-profile profile-name;
    }
    rewrite-value {
      input {
        ieee-802.1{
          code-point code-point-bits;
        }
      }
    }
  }
}
}
unit logical-unit-number {
  classifiers {
```



```

        (dscp | dscp-ipv6 | ieee-802.1) (classifier-name | default);
    }
    forwarding-class class-name;
    rewrite-rules {
        (dscp | dscp-ipv6 | ieee-802.1) (classifier-name | default);
    }
}
}
multi-destination {
    classifiers {
        (dscp | ieee-802.1) classifier-name;
    }
}
rewrite-rules {
    (dscp | dscp-ipv6 | ieee-802.1) classifier-name {
        import (rewrite-name | default);
        forwarding-class class-name {
            loss-priority priority code-point (alias | bits);
        }
    }
}
}
scheduler-maps {
    map-name {
        forwarding-class class-name scheduler scheduler-name;
    }
}
schedulers {
    scheduler-name {
        buffer-size (percent percentage | remainder);
        drop-profile-map loss-priority (low | medium-high | high) protocol protocol
            drop-profile drop-profile-name;
        priority priority;
        shaping-rate (rate | percent percentage);
        transmit-rate (percent percentage);
    }
}
shared-buffer {
    egress {
        percent percent;
        buffer-partition (lossless | lossy | multicast) {
            percent percent
        }
    }
    ingress {
        percent percent;
        buffer-partition (lossless | lossless-headroom | lossy) {
            percent percent
        }
    }
}
traffic-control-profiles profile-name {
    guaranteed-rate(rate| percent percentage);
    scheduler-map map-name;
    shaping-rate (rate| percent percentage);
}

```



}

### [edit ethernet-switching-options] Hierarchy

```

ethernet-switching-options {
  analyzer {
    name {
      input {
        egress {
          interface (all | interface-name);
        }
        ingress {
          interface (all | interface-name);
          vlan (vlan-id | vlan-name);
        }
      }
      output {
        interface interface-name;
        ip-address ip-address;
        vlan (vlan-id | vlan-name);
      }
    }
  }
  bpdv-block {
    interface (all | [interface-name]);
    disable-timeout timeout;
  }
  dot1q-tunneling {
    ether-type (0x8100 | 0x88a8 | 0x9100)
  }
  interfaces interface-name {
    no-mac-learning;
  }
  mac-table-aging-time seconds {
  }
  port-error-disable {
    disable-timeout timeout;
  }
  secure-access-port {
    dhcp-snooping-file {
      location local_pathname | remote_URL;
      timeout seconds;
      write-interval seconds;
    }
    interface (all | interface-name) {
      allowed-mac {
        mac-address-list;
      }
      (dhcp-trusted | no-dhcp-trusted);
      fcoe-trusted;
      mac-limit limit action action;
      no-allowed-mac-log;
    }
    vlan (all | vlan-name) {
      (arp-inspection | no-arp-inspection) [
        forwarding-class (for DHCP Snooping or DAI Packets) class-name;
      ]
    }
  }
}

```



```

dhcp-option82 {
  circuit-id {
    prefix (Circuit ID for Option 82) hostname;
    use-interface-description;
    use-vlan-id;
  }
  remote-id {
    prefix (Remote ID for Option 82) hostname | mac | none;
    use-interface-description;
    use-string string;
  }
  vendor-id <string>;
}
(examine-dhcp | no-examine-dhcp) {
  forwarding-class (for DHCP Snooping or DAI Packets) class-name;
}
examine-fip {
  examine-vn2vn {
    beacon-period milliseconds;
  }
  fc-map fc-map-value;
}
mac-move-limit limit <fabric-limit limit action action>;
}
}
storm-control {
  interface (all | interface-name) {
    bandwidth bandwidth;
    no-broadcast;
    no-multicast;
    no-unknown-unicast;
  }
}
traceoptions {
  file filename <files number> <no-stamp> <replace> <size size> <world-readable |
no-world-readable>;
  flag flag <disable>;
}
unknown-unicast-forwarding {
  vlan (all | vlan-name) {
    interface interface-name;
  }
}
}
}

```

#### [edit fabric] Hierarchy

```

fabric
  aliases {
    director-device director-device-name {
      assigned-director-device-name;
    }
    interconnect-device interconnect-device-name {
      assigned-interconnect-device-name;
    }
    node-device node-device-name {

```



```

        assigned-node-device-name;
    }
}
resources {
    node-group node-group-name {
        node-device node-device-name;
        network-domain;
    }
}
}
}

```

### [edit fc-fabrics] Hierarchy

```

fc-fabrics {
    fc-fabric-name {
        description
        fabric-id fc-fabric-id;
        fabric-type proxy;
        interface {
            interface-name {
                max-login-sessions max-login-sessions;
            }
            interface-name {
                max-login-sessions max-login-sessions;
            }
            <...>;
            max-login-sessions max-login-sessions;
        }
        vlan.interface-name;
    }
    fc2 {
        traceoptions {
            file filename <replace> <size size> <files number> <no-stamp>;
            <world-readable | no-world-readable>;
            flag flag <flag-modifier>;
        }
    }
    max-login-sessions max-login-sessions;
    protocols {
        fip {
            fcoe-trusted;
            fc-map fc-map-value;
            fka-adv-period milliseconds;
            interface {
                interface-name {
                    fka-adv-period milliseconds;
                    priority priority;
                }
            }
            max-sessions-per-enode max-sessions-per-enode;
            priority priority;
            traceoptions {
                file filename <replace> <size size> <files number> <no-stamp>;
                <world-readable | no-world-readable>;
                flag flag <flag-modifier> <disable>;
            }
        }
    }
}

```



```

    }
  }
  proxy {
    auto-load-rebalance
    load-balance-algorithm (simple | enode-based | flogi-based);
    no-fabric-wwn-verify;
    traceoptions {
      file filename <replace> <size size> <files number> <no-stamp>;
      <world-readable | no-world-readable>;
      flag flag <flag-modifier> <disable>;
    }
  }
}

```

#### [edit fc-options] Hierarchy

```

fc-options
  max-login-sessions-per-node max-login-sessions-per-node;
  traceoptions {
    file filename <replace> <size size> <files number> <no-stamp>;
    <world-readable | no-world-readable>;
    flag flag <flag-modifier> <disable>;
  }

```

#### [edit firewall] Hierarchy

```

firewall {
  family family-name {
    filter filter-name {
      interface-specific;
      term term-name {
        from {
          match-conditions;
        }
        then {
          action;
          action-modifiers;
        }
      }
    }
  }
}
policer policer-name {
  filter-specific;
  if-exceeding {
    bandwidth-limit bps;
    burst-size-limit bytes;
  }
  then {
    policer-action;
  }
}
three-color-policer policer-name {
  action {
    loss-priority high then discard;
  }
}

```



```
single-rate {
  (color-aware | color-blind);
  committed-information-rate bps;
  committed-burst-size bytes;
  excess-burst-size bytes;
}
two-rate {
  (color-aware | color-blind);
  committed-information-rate bps;
  committed-burst-size bytes;
  peak-information-rate bps;
  peak-burst-size bytes;
}
}
```

---

#### [edit groups] Hierarchy

```
groups {
  group-name {
    configuration-data;
  }
  global {
    configuration-data
  }
  if-config {
    configuration-data
  }
  rel {
    configuration-data
  }
}
```

---

#### [edit interfaces] Hierarchy

```
interfaces {
  aex {
    disable;
    aggregated-ether-options {
      configured-flow-control {
        rx-buffers (on | off);
        tx-buffers (on | off);
      }
      (flow-control | no-flow-control);
      lacp mode {
        admin-key key;
        periodic interval;
        system-id mac-address;
      }
      link-speed speed;
      loopback;
      no-loopback;
      minimum-links number;
    }
    mc-ae {
      chassis-id chassis-id;
    }
  }
}
```



```

    mc-ae-id mc-ae-id;
    mode (active-active);
    status-control (active | standby);
  }
  description text;
  gratuitous-arp-reply | no-gratuitous-arp-reply)
  hold-time down milliseconds up milliseconds;
  mtu bytes;
  no-gratuitous-arp-request;
  traceoptions;
  (traps | no traps);
  unit logical-unit-number {
    disable;
    description text;
    family {
      ethernet-switching {
        filter input filter-name;
        filter output filter-name;
        native-vlan-id vlan-id;
        port-mode mode;
        reflective-relay;
        vlan {
          members [ (all | names | vlan-ids) ];
        }
      }
      inet {
        address address {
          primary;
        }
        filter input filter-name;
        filter output filter-name;
        primary;
        targeted-broadcast;
      }
    }
    (traps | no traps);
    vlan-id vlan-id-number;
  }
  vlan-tagging;
}
interface-range interface-range-name {
  disable;
  description text;
  ether-options {
    802.3ad aex {
      lacp {
        force-up;
      }
    }
  }
  (auto-negotiation | no-auto-negotiation);
  configured-flow-control {
    rx-buffers (on | off);
    tx-buffers (on | off);
  }
  (flow-control | no-flow-control);
  link-mode mode;
  speed (auto-negotiation | speed);
}

```



```
}
hold-time milliseconds down milliseconds;
member interface-name;
member-range starting-interface-name to ending-interface-name;
mtu bytes;
unit logical-unit-number {
    disable;
    description text;
    family family-name {...}
    (traps | no traps);
    vlan-id vlan-id-number;
}
}
lo0 {
    disable;
    description text;
    hold-time milliseconds down milliseconds;
    traceoptions;
    (traps | no traps);
    unit logical-unit-number {
        disable;
        description text;
        family {
            inet {
                address address {
                    primary;
                }
                filter input filter-name;
                filter output filter-name;
                primary;
                targeted-broadcast;
            }
        }
        (traps | no traps);
    }
}
mex {
    disable;
    description text;
    hold-time milliseconds down milliseconds;
    (gratuitous-arp-reply | no-gratuitous-arp-reply);
    no-gratuitous-arp-request;
    traceoptions;
    traps;
    unit logical-unit-number {
        disable;
        description text;
        family {
            ethernet-switching {
                filter input filter-name;
                filter output filter-name;
                native-vlan-id vlan-id;
                port-mode mode;
                reflective-relay;
                vlan {
                    members [ (all | names | vlan-ids) ];
                }
            }
        }
    }
}
```



```

    }
    inet {
        address address {
            primary;
            filter input filter-name;
            filter output filter-name;
            primary;
            targeted-broadcast;
        }
    }
    traps;
    vlan-id vlan-id-number;
}
vlan-tagging;
vlan {
    disable;
    description text;
    (gratuitous-arp-reply | no-gratuitous-arp-reply);
    hold-time milliseconds down milliseconds;
    mtu bytes;
    no-gratuitous-arp-request;
    traceoptions;
    (traps | no traps);
    unit logical-unit-number {
        description text;
        disable;
        family {
            inet {
                address address {
                    primary;
                }
                filter input filter-name;
                filter output filter-name;
                primary;
                targeted-broadcast;
            }
        }
        (traps | no traps);
    }
}
fc-0/0/port {
    fibrechannel-options {
        bb-sc-n;
        (loopback | no-loopback);
        speed (auto-negotiation | 2g | 4g | 8g);
    }
    unit logical-unit-number {
        disable;
        description text;
        family {
            fibre-channel {
                port-mode np-port;
            }
        }
        (traps | no traps);
    }
}
ge-0/0/port {
    disable;

```



```
description text;
ether-options {
  802.3ad aex {
    lacp {
      force-up;
      primary;
    }
  }
  (auto-negotiation | no-auto-negotiation);
  configured-flow-control {
    rx-buffers (on | off);
    tx-buffers (on | off);
  }
  (flow-control | no-flow-control);
  link-mode mode;
  loopback;
  no-loopback;
  speed (auto-negotiation | speed);
}
gratuitous-arp-reply | no-gratuitous-arp-reply);
hold-time milliseconds down milliseconds;
mtu bytes;
no-gratuitous-arp-request;
traceoptions;
(traps | no traps);
unit logical-unit-number {
  description text;
  disable;
  family {
    ethernet-switching {
      filter input filter-name;
      filter output filter-name;
      native-vlan-id vlan-id;
      port-mode mode;
      reflective-relay;
      vlan {
        members [ (all | names | vlan-ids) ];
      }
    }
  }
  inet {
    address address {
      primary;
    }
    filter input filter-name;
    filter output filter-name;
    primary;
    targeted-broadcast;
  }
  (traps | no traps);
  vlan-id vlan-id-number;
}
vlan-tagging;
}
vrp-group group-id {
  (accept-data | no-accept-data);
  advertise-interval seconds;
```



```

authentication-key key;
authentication-type authentication;
fast-interval milliseconds;
(preempt | no-preempt) {
    hold-time seconds;
}
priority number;
track {
    interface interface-name {
        bandwidth-threshold bits-per-second priority-cost priority;
        priority-cost priority;
    }
    priority-hold-time seconds;
    route prefix/prefix-length routing-instance instance-name priority-cost priority;
}
virtual-address [ addresses ];
}
xe-0/0/port {
    disable;
    description text;
    ether-options {
        802.3ad aex {
            lacp {
                force-up;
            }
        }
    }
    configured-flow-control {
        rx-buffers (on | off);
        tx-buffers (on | off);
    }
    (flow-control | no-flow-control);
    loopback;
    no-loopback;
}
(gratuitous-arp-reply | no-gratuitous-arp-reply)
hold-time milliseconds down milliseconds;
mtu bytes;
no-gratuitous-arp-request;
traceoptions;
(traps | no traps);
unit logical-unit-number {
    disable;
    description text;
    family {
        ethernet-switching {
            filter input filter-name;
            filter output filter-name;
            native-vlan-id vlan-id;
            port-mode mode;
            reflective-relay;
            vlan {
                members [ (all | names | vlan-ids) ];
            }
        }
    }
    fibre-channel {

```



```
    port-mode (f-port | np-port);
  }
  inet {
    address address {
      primary;
    }
    filter input filter-name;
    filter output filter-name;
    primary;
    targeted-broadcast;
  }
  (traps | no traps);
  vlan-id vlan-id-number;
}
vlan-tagging;
}
```

---

#### [edit policy-options] Hierarchy

```
policy-options
  application-maps application-map-name {
    application application-name {
      code-points [ aliases ] [ bit-patterns ];
    }
  }
  policy-statement policy-name {
    term term-name {
      from {
        family family-name;
        match-conditions;
        policy subroutine-policy-name;
        prefix-list prefix-list-name;
        prefix-list-filter prefix-list-name match-type <actions>;
        route-filter destination-prefix match-type <actions>;
        source-address-filter source-prefix match-type <actions>;
      }
      to {
        match-conditions;
        policy subroutine-policy-name;
      }
      then actions;
    }
  }
```

---

#### [edit protocols] Hierarchy

```
protocols {
  bgp {
    disable;
    accept-remote-nexthop;
    advertise-external <conditional>;
    advertise-inactive;
    (advertise-peer-as | no-advertise-peer-as);
    authentication-algorithm (aes-128-cmac-96 | hmac-sha-1-96 | md5);
    authentication-key key;
```



```

authentication-key-chain key-chain;
bfd-liveness-detection {
  authentication {
    algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 |
      meticulous-keyed-sha-1 | simple-password);
    key-chain key-chain-name;
    loose-check;
  }
  detection-time {
    threshold milliseconds;
  }
  hold-down-interval milliseconds;
  minimum-interval milliseconds;
  minimum-receive-interval milliseconds;
  multiplier number;
  no-adaptation;
  session-mode (automatic | multihop | single-hop);
  transmit-interval {
    minimum-interval milliseconds;
    threshold milliseconds;
  }
  version (1 | automatic);
}
cluster cluster-identifier;
damping;
description text-description;
export [ policy-names ];
family family-name {
  ... the family subhierarchies appear after the main [edit protocols bgp] hierarchy ...
}
graceful-restart {
  disable;
  restart-time seconds;
  stale-routes-time seconds;
}
group group-name {
  ... the group subhierarchy appears after the main [edit protocols bgp] hierarchy ...
}
hold-time seconds;
import [ policy-names ];
include-mp-next-hop;
keep (all | none);
local-address address;
local-as autonomous-system <loops number> <alias> <private>;
local-preference local-preference;
log-updown;
metric-out (metric | igp (delay-med-update | offset) | minimum-igp offset);
mtu-discovery;
multihop {
  no-nexthop-change;
  ttl ttl-value;
}
no-aggregator-id;
no-client-reflect;
out-delay seconds;
outbound-route-filter {

```



```
    bgp-orf-cisco-mode;
    prefix-based {
        accept {
            inet;
            inet6;
        }
    }
}
passive;
path-selection {
    always-compare-med;
    as-path-ignore;
    cisco-non-deterministic;
    external-router-id;
    med-plus-igp {
        igp-multiplier number;
        med-multiplier number;
    }
}
peer-as autonomous-system;
preference preference;
remove-private;
tcp-mss segment-size;
traceoptions {
    file filename <files number> <size maximum-file-size> <world-readable |
        no-world-readable>;
    flag flag <flag-modifier> <disable>;
}
}
dcbx {
    disable;
    interface (interface-name | all) {
        disable;
        application-map application-map-name;
        applications {
            no-auto-negotiation;
        }
        enhanced-transmission-selection {
            no-auto-negotiation;
            recommendation-tlv {
                no-auto-negotiation;
            }
        }
        mode (auto-negotiate | ieee-dcbx | dcbx-version-1.01);
        priority-flow-control {
            no-auto-negotiation;
        }
    }
}
iccp {
    authentication-key string;
    local-ip-addr local-ip-addr;
    peer ip-address {
        authentication-key string;
        backup-liveness-detection {
            backup-peer-ip ip-address;
        }
    }
}
```



```

}
liveness-detection {
  detection-time {
    threshold milliseconds;
  }
  minimum-interval milliseconds;
  minimum-receive-interval milliseconds;
  multiplier number;
  no-adaptation;
  transmit-interval {
    minimum-interval milliseconds;
    threshold milliseconds;
  }
  version (Liveness Detection) (1 | automatic);
}
local-ip-addr ipv4-address;
session-establishment-hold-time seconds;
}
session-establishment-hold-time seconds;
traceoptions {
  file <filename> <files number> <match regular-expression> <microsecond-stamp>
    <size size> <world-readable | no-world-readable>;
  flag flag;
  no-remote-trace;
}
}
igmp-snooping {
  traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable>
      <match regex>;
    flag flag (detail | disable | receive | send);
  }
}
vlan vlan-name {
  disable {
    interface interface-name;
  }
  interface interface-name {
    group-limit limit;
    multicast-router-interface;
    static {
      group ip-address;
    }
  }
  robust-count number;
}
}
isis {
  disable;
  export [ policy-names ];
  ignore-attached-bit;
  interface interface-name {
    bfd-liveness-detection {
      authentication {
        algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 |
          meticulous-keyed-sha-1 | simple-password);
        key-chain key-chain-name;

```



```
        loose-check;
    }
    detection-time {
        threshold milliseconds;
    }
    minimum-interval milliseconds;
    minimum-receive-interval milliseconds;
    multiplier number;
    no-adaptation;
    transmit-interval {
        minimum-interval milliseconds;
        threshold milliseconds;
    }
    version (1 | automatic);
}
checksum;
csnp-interval (seconds | disable);
disable;
hello-padding (adaptive | loose | strict);
level (1 | 2) {
    disable;
    hello-authentication-key key;
    hello-authentication-type authentication;
    hello-interval seconds;
    hold-time seconds;
    ipv4-multicast-metric number;
    metric metric;
    passive;
    priority number;
}
lsp-interval milliseconds;
mesh-group (value | blocked);
no-ipv4-multicast;
no-unicast-topology;
passive;
point-to-point;
}
level (1 | 2) {
    disable;
    authentication-key key;
    authentication-type authentication;
    external-preference preference;
    no-csnp-authentication;
    no-hello-authentication;
    no-psnp-authentication;
    preference preference;
    prefix-export-limit number;
    wide-metrics-only;
}
loose-authentication-check;
lsp-lifetime seconds;
max-areas number;
no-adjacency-holddown;
no-authentication-check;
no-ipv4-routing;
overload {
```



```

        advertise-high-metrics;
        timeout seconds;
    }
    reference-bandwidth reference-bandwidth;
    rib-group {
        inet group-name;
    }
    topologies {
        ipv4-multicast;
    }
    traceoptions {
        file filename <files number> <size maximum-file-size> <world-readable |
            no-world-readable>;
        flag flag <flag-modifier> <disable>;
    }
    traffic-engineering {
        disable;
        family inet {
            shortcuts {
                multicast-rpf-routes:
            }
        }
    }
}
lldp {
    disable;
    advertisement-interval seconds;
    hold-multiplier number;
    interface (LLDP) (all | interface-name) {
        disable;
    }
    traceoptions {
        file filename <files number> <size size> <world-readable | no-world-readable>
            <match regex>;
        flag flag (detail | disable | receive | send);
    }
}
mstp {
    disable;
    bpdu-timeout-action;
    bridge-priority priority;
    configuration-name (MSTP) name;
    forward-delay seconds;
    hello-time seconds;
    interface (all | interface-name) {
        disable;
        bpdu-timeout-action {
            block;
            alarm;
        }
        cost cost;
        edge;
        mode mode;
        no-root-port;
        priority priority;
    }
}

```



```
max-age seconds;
max-hops hops;
msti msti-id {
  vlan (vlan-id | vlan-name);
  interface interface-name {
    disable;
    cost cost;
    edge;
    mode mode;
    priority priority;
  }
}
revision-level revision-level;
traceoptions {
  file filename <files number> <size size> <no-stamp | world-readable |
    no-world-readable>;
  flag flag;
}
}
ospf {
  disable;
  area area-id {
    area-range ip-prefix</prefix-length> <exact> <override-metric metric> <restrict>;
    context-identifier identifier
    interface interface-name {
      disable;
      authentication {
        md5 key-id key key-string <start-time YYYY-MM-DD.hh:mm>;
        simple-password key-string;
      }
      bandwidth-based-metrics {
        bandwidth value metric number;
      }
      bfd-liveness-detection {
        authentication {
          algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 |
            meticulous-keyed-sha-1 | simple-password);
          key-chain key-chain-name;
          loose-check;
        }
        detection-time {
          threshold milliseconds;
        }
      }
      full-neighbors-only;
      minimum-interval milliseconds;
      minimum-receive-interval milliseconds;
      multiplier number;
      no-adaptation;
      transmit-interval {
        minimum-interval milliseconds;
        threshold milliseconds;
      }
      version (1 | automatic);
    }
  }
  dead-interval seconds;
  dynamic-neighbors;
```



```

flood-reduction;
hello-interval seconds;
interface-type (nbma | p2mp | p2p);
metric metric;
neighbor address <eligible>;
no-eligible-backup;
no-interface-state-traps;
no-neighbor-down-notification;
passive {
    traffic-engineering {
        remote-node-id address;
    }
}
poll-interval seconds;
priority number;
retransmit-interval seconds;
secondary;
te-metric metric;
topology (name | default | ipv4-multicast) {
    disable;
    bandwidth-based-metrics {
        bandwidth value;
        metric number;
    }
    metric metric;
}
transit-delay seconds;
}
network-summary-export [ policy-names ];
network-summary-import [ policy-names ];
nssa {
    area-range ip-prefix </prefix-length> <exact> <override-metric metric> <restrict>;
    default-lsa {
        default-metric metric;
        metric-type type;
        type-7;
    }
    (summaries | no-summaries);
}
stub <default-metric metric> <summaries | no-summaries>;
virtual-link neighbor-id router-id transit-area area-id {
    disable;
    authentication {
        md5 key-id key key-string <start-time YYYY-MM-DD.hh:mm>;
        simple-password key-string;
    }
    dead-interval seconds;
    demand-circuit;
    flood-reduction;
    hello-interval seconds;
    ipsec-sa sa-name;
    no-neighbor-down-notification;
    retransmit-interval seconds;
    topology (name | default | ipv4-multicast) {
        disable;
        metric metric;
    }
}

```



```
    }
    transit-delay seconds;
  }
}
database-protection {
  ignore-count number;
  ignore-time seconds;
  maximum-lsa number;
  reset-time seconds;
  warning-only;
  warning-threshold percent;
}
export [ policy-names ];
external-preference preference;
graceful-restart {
  disable;
  helper-disable <both | restart-signaling | standard>;
  no-strict-lsa-checking;
  notify-duration seconds;
  restart-duration seconds;
}
import [ policy-names ];
no-nssa-abr;
no-rfc-1583;
overload <timeout seconds>;
preference preference;
prefix-export-limit number;
reference-bandwidth reference-bandwidth;
rib-group group-name;
topology (default | ipv4-multicast | name) {
  overload;
  prefix-export-limit number;
  topology-id number;
}
traceoptions {
  file filename <files number> <size maximum-file-size> <world-readable |
    no-world-readable>;
  flag flag <flag-modifier> <disable>;
}
traffic-engineering {
  advertise-unnumbered-interfaces;
  credibility-protocol-preference;
  ignore-lsp-metrics;
  multicast-rpf-routes;
  no-topology;
  shortcuts <lsp-metric-into-summary>;
}
}
pim {
  disable;
  assert-timeout seconds;
  dense-groups {
    addresses;
  }
  dr-election-on-p2p;
  export;
```



```

family (inet | inet6) {
    disable;
}
graceful-restart {
    disable;
    restart-duration seconds;
}
import [ policy-names ];
interface interface-name {
    accept-remote-source;
    disable;
    family (inet | inet6) {
        disable;
    }
    hello-interval seconds;
    mode (dense | sparse | sparse-dense);
    neighbor-policy [ policy-names ];
    override-interval milliseconds;
    priority number;
    propagation-delay milliseconds;
    reset-tracking-bit;
    version version;
}
join-load-balance;
join-prune-timeout;
nonstop-routing;
override-interval milliseconds;
propagation-delay milliseconds;
reset-tracking-bit;
rib-group group-name;
rp {
    auto-rp {
        (announce | discovery | mapping);
        (mapping-agent-election | no-mapping-agent-election);
    }
    bootstrap {
        family (inet | inet6) {
            export [ policy-names ];
            import [ policy-names ];
            priority number;
        }
    }
    bootstrap-import [ policy-names ];
    bootstrap-export [ policy-names ];
    bootstrap-priority number;
    dr-register-policy [ policy-names ];
    embedded-rp {
        group-ranges {
            destination-ip-prefix</prefix-length>;
        }
        maximum-rps limit;
    }
    local {
        family (inet | inet6) {
            address address;
            anycast-pim {

```



```
        disable;
        rp-set {
            address address <forward-msdp-sa>;
        }
        local-address address;
    }
    group-ranges {
        destination-ip-prefix</prefix-length>;
    }
    hold-time seconds;
    priority number;
}
}
rp-register-policy [ policy-names ];
spt-threshold {
    infinity [ policy-names ];
}
static {
    address address {
        group-ranges {
            version version;
            destination-ip-prefix</prefix-length>;
        }
    }
}
}
rpf-selection {
    group group-address {
        source source-address {
            next-hop next-hop-address;
        }
        wildcard-source {
            next-hop next-hop-address;
        }
    }
    prefix-list prefix-list-addresses {
        source source-address {
            next-hop next-hop-address;
        }
        wildcard-source {
            next-hop next-hop-address;
        }
    }
    traceoptions {
        file filename <files number> <size size> <world-readable | no-world-readable>;
        flag flag <flag-modifier> <disable>;
    }
    tunnel-devices [ mt-fpc/pic/port ];
}
rip {
    authentication-key password;
    authentication-type type;
    (check-zero | no-check-zero);
    group group-name {
        bfd-liveness-detection {
            authentication {
```



```

    algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 |
               meticulous-keyed-sha-1 | simple-password);
    key-chain key-chain-name;
    loose-check;
}
detection-time {
    threshold milliseconds;
}
minimum-interval milliseconds;
minimum-receive-interval milliseconds;
multiplier number;
no-adaptation;
transmit-interval {
    minimum-interval milliseconds;
    threshold milliseconds;
}
version (1 | automatic);
}
export [ policy-names ];
import [ policy-names ];
metric-out metric;
neighbor neighbor-name {
    any-sender;
    authentication-key password;
    authentication-type type;
    bfd-liveness-detection {
        ... same statements as at the [edit protocols rip group group-name
            bfd-liveness-detection] hierarchy level ...
    }
    (check-zero | no-check-zero);
    import [ policy-names ];
    message-size number;
    metric-in metric;
    receive (both | none | version-1 | version-2);
    route-timeout seconds;
    send (broadcast | multicast | none | version-1);
    update-interval seconds;
}
preference preference;
route-timeout seconds;
update-interval seconds;
}
holddown seconds;
import [ policy-names ];
message-size number;
metric-in metric;
receive (both | none | version-1 | version-2);
rib-group group-name;
route-timeout seconds;
send (broadcast | multicast | none | version-1);
traceoptions {
    file filename <files number> <size maximum-file-size> <world-readable |
        no-world-readable>;
    flag flag <flag-modifier> <disable>;
}
update-interval seconds;

```



```
}
rstp {
  disable;
  bpdu-block-on-edge;
  bridge-priority priority;
  forward-delay seconds;
  hello-time seconds;
  interface (all | interface-name) {
    disable;
    bpdu-timeout-action {
      alarm;
      block;
    }
    cost cost;
    edge;
    mode mode;
    no-root-port;
    priority priority;
  }
  max-age seconds;
}
traceoptions {
  file filename <files number > <size size > <no-stamp> <world-readable |
    no-world-readable>;
  flag flag;
}
}
stp {
  disable;
  bridge-priority priority;
  forward-delay seconds;
  hello-time seconds;
  interface (all | interface-name) {
    disable;
    bpdu-timeout-action {
      alarm;
      block;
    }
    cost cost;
    edge;
    mode mode;
    no-root-port;
    priority priority;
  }
  max-age seconds;
}
traceoptions {
  file filename <files number > <size size > <no-stamp | world-readable |
    no-world-readable>;
  flag flag;
}
uplink-failure-detection {
  group group-name {
    link-to-monitor interface-name;
    link-to-disable interface-name;
  }
}
```



```

}
vstp {
  bpdu-block-on-edge;
  disable (Spanning Trees);
  force-version (Spanning Trees) stp;
  vlan (Spanning Trees) vlan-id {
    bridge-priority (Spanning Trees) priority;
    forward-delay (Spanning Trees) seconds;
    hello-time (Spanning Trees) seconds;
    interface (Spanning Trees) (all | interface-name) {
      bpdu-timeout-action (Spanning Trees) {
        block (Spanning Trees);
        log (Spanning Trees);
      }
      cost (Spanning Trees) cost;
      disable (Spanning Trees);
      edge (Spanning Trees);
      mode (Spanning Trees) mode;
      no-root-port (Spanning Trees);
      priority (Spanning Trees) priority;
    }
    max-age (Spanning Trees) seconds;
    traceoptions (Spanning Trees) {
      file filename <files number > <size size > <no-stamp | world-readable |
        no-world-readable>;
      flag flag;
    }
  }
}
}
}

```

---

#### [edit security] Hierarchy

```

security {
  certificates
  pki
  ssh-known-hosts
  traceoptions
}

```

---

#### [edit snmp] Hierarchy

```

snmp {
  client-list client-list-name {
    ip-addresses;
  }
  community community-name {
    authorization authorization;
    client-list-name client-list-name;
    clients {
      address restrict;
    }
    view view-name;
  }
  contact contact;
  description description;
}

```



```
filter-duplicates;
filter-interfaces;
health-monitor {
    falling-threshold integer;
    interval seconds;
    rising-threshold integer;
}
interface [ interface-names ];
location location;
name name;
nonvolatile {
    commit-delay seconds;
}
rmon {
    alarm index {
        description description;
        falling-event-index index;
        falling-threshold integer;
        falling-threshold-interval seconds;
        interval seconds;
        request-type;
        rising-event-index index;
        rising-threshold integer;
        sample-type (absolute-value | delta-value);
        startup-alarm (falling-alarm | rising-alarm | rising-or-falling alarm);
        syslog-subtag syslog-subtag;
        variable oid-variable;
    }
    event index {
        community community-name;
        description description;
        type type;
    }
    history history-index {
        bucket-size number;
        interface interface-name;
        interval seconds;
        owner owner-name;
    }
}
traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable> <match
        regular-expression>;
    flag flag;
}
trap-group group-name {
    categories {
        category;
    }
    destination-port port-number;
    targets {
        address;
    }
    version (all | v1 | v2);
}
trap-options {
```



```

agent-address outgoing-interface;
source-address address;
}
v3 {
  notify name {
    tag tag-name;
    type trap;
  }
  notify-filter profile-name {
    oid object-identifier (include | exclude);
  }
  snmp-community community-index {
    community-name community-name;
    security-name security-name;
    tag tag-name;
  }
  target-address target-address-name {
    address address;
    address-mask address-mask;
    port port-number;
    retry-count number;
    tag-list tag-list;
    target-parameters target-parameters-name;
    timeout seconds;
  }
  target-parameters target-parameters-name {
    notify-filter profile-name;
    parameters {
      message-processing-model (v1 | v2c | V3);
      security-level (authentication | none | privacy);
      security-model (usm | v1 | v2c);
      security-name security-name;
    }
  }
}
usm {
  local-engine {
    user username {
      authentication-sha {
        authentication-password authentication-password;
      }
      authentication-md5 {
        authentication-password authentication-password;
      }
      authentication-none;
      privacy-aes128 {
        privacy-password privacy-password;
      }
      privacy-des {
        privacy-password privacy-password;
      }
      privacy-3des {
        privacy-password privacy-password;
      }
      privacy-none;
    }
  }
}

```



```
remote-engine engine-id {
  user username {
    authentication-sha {
      authentication-password authentication-password;
    }
    authentication-md5 {
      authentication-password authentication-password;
    }
    authentication-none;
    privacy-aes128 {
      privacy-password privacy-password;
    }
    privacy-des {
      privacy-password privacy-password;
    }
    privacy-3des {
      privacy-password privacy-password;
    }
    privacy-none {
      privacy-password privacy-password;
    }
  }
}
}
vacm {
  access {
    group group-name {
      (default-context-prefix | context-prefix context-prefix) {
        security-model (any | usm | v1 | v2c) {
          security-level (authentication | none | privacy) {
            notify-view view-name;
            read-view view-name;
            write-view view-name;
          }
        }
      }
    }
  }
}
security-to-group {
  security-model (usm | v1 | v2c) {
    security-name security-name {
      group group-name;
    }
  }
}
}
view view-name {
  oid object-identifier (include | exclude);
}
}
```

---

#### [edit system] Hierarchy

```
system {
  accounting {
```



```

events [ login change-log interactive-commands ];
destination {
  radius {
    server {
      server-address {
        accounting-port port-number;
        retry number;
        secret password;
        source-address address;
        timeout seconds;
      }
    }
  }
  tacplus {
    server {
      server-address {
        port port-number;
        secret password;
        single-connection;
        timeout seconds;
      }
    }
  }
}
archival {
  configuration {
    archive-sites {
      ftp://<username>:<password>@<host>:<port>/<url-path>;
      ftp://<username>:<password>@<host>:<port>/<url-path>;
    }
    transfer-interval interval;
    transfer-on-commit;
  }
}
arp {
  aging-timer minutes;
  interfaces;
}
authentication-order [ authentication-methods ];
(compress-configuration-files | no-compress-configuration-files);
default-address-selection;
domain-name domain-name;
domain-search [ domain-list ];
host-name hostname;
internet-options {
  icmpv4-rate-limit bucket-size bucket-size packet-rate packet-rate;
  source-port upper-limit <upper-limit>;
}
location {
  altitude feet;
  building name;
  country-code code;
  floor number;
  hcoord horizontal-coordinate;
  lata service-area;

```



```
latitude degrees;  
longitude degrees;  
npa-nxx number;  
postal-code postal-code;  
rack number;  
vcoord vertical-coordinate;  
}  
login {  
  announcement text;  
  class class-name {  
    access-end;  
    access-start;  
    allow-configuration "regular-expression";  
    allowed-days "regular-expression";  
    deny-commands "regular-expression";  
    deny-configuration "regular-expression";  
    idle-timeout minutes;  
    login-tip;  
    permissions [ permissions ];  
  }  
  message text;  
  password {  
    change-type (set-transitions | character-set);  
    format (md5 | sha1 | des);  
    maximum-length length;  
    minimum-changes number;  
    minimum-length length;  
  }  
  retry-options {  
    backoff-factor seconds;  
    backoff-threshold number;  
    minimum-time seconds;  
    tries-before-disconnect number;  
  }  
  user username {  
    authentication {  
      (encrypted-password "password" | plain-text-password);  
      load-key-file URL;  
      remote-debug-permission (qfabric-admin | qfabric-operator | qfabric-user);  
      ssh-rsa "public-key";  
      ssh-dsa "public-key";  
    }  
    uid uid-value;  
    class class-name;  
    full-name complete-name;  
  }  
}  
name-server {  
  address;  
}  
no-multicast-echo;  
no-redirects;  
no-ping-record-route;  
no-ping-time-stamp;  
ntp {  
  authentication-key number type type value password;
```



```

    serveraddress <key key-number> <version value> <prefer>;
}
ports {
  auxiliary {
    disable;
    insecure;
    type terminal-type;
  }
  console {
    disable;
    insecure;
    log-out-on-disconnect;
    type terminal-type;
  }
}
radius-server server-address {
  accounting-port port-number;
  port number;
  retry number;
  secret password;
  source-address source-address;
  timeout seconds;
}
}
radius-options {
  password-protocol mschap-v2;
}
attributes {
  nas-ip-address ip-address;
}
root-authentication {
  (encrypted-password "password" | plain-text-password);
  ssh-rsa "public-key";
  ssh-dsa "public-key";
}
(saved-core-context | no-saved-core-context);
saved-core-files saved-core-files;
services {
  finger {
    connection-limit limit;
    rate-limit limit;
  }
  flow-tap-dtcp {
    ssh {
      connection-limit limit;
      rate-limit limit;
    }
  }
  ftp {
    connection-limit limit;
    rate-limit limit;
  }
}
service-deployment {
  servers server-address {
    port port-number;
  }
  source-address source-address;
}

```



```
}
ssh {
  root-login (allow | deny | deny-password);
  protocol-version [v1 v2];
  connection-limit limit;
  rate-limit limit;
}
telnet {
  connection-limit limit;
  rate-limit limit;
}
web-management {
  http {
    interfaces [ interface-names ];
    port port;
  }
  https {
    interfaces [ interface-names ];
    local-certificate name;
    port port;
  }
  session {
    idle-timeout [ minutes ];
    session-limit [ session-limit ];
  }
}
xnm-clear-text {
  connection-limit limit;
  rate-limit limit;
}
xnm-ssl {
  connection-limit limit;
  local-certificate name;
  rate-limit limit;
}
}
static-host-mapping {
  hostname {
    alias [ alias ];
    inet [ address ];
    sysid system-identifier;
  }
}
syslog {
  archive {
    files number;
    size maximum-file-size;
    start-time "YYYY-MM-DD.hh:mm";
    transfer-interval minutes;
    (world-readable | no-world-readable);
  }
  console {
    facility severity;
  }
  file filename {
    archive {
```



```

    files number;
    size maximum-file-size;
    start-time "YYYY-MM-DD.hh:mm";
    transfer-interval minutes;
    (world-readable | no-world-readable);
  }
  explicit-priority;
  facility severity;
  match "regular-expression";
  structured-data {
    brief;
  }
}
host (hostname | other-routing-engine | scc-master) {
  explicit-priority;
  facility-override facility;
  facility severity;
  log-prefix string;
  match "regular-expression";
}
source-address source-address;
time-format (millisecond | year | year millisecond);
user (username | *) {
  facility severity;
  match "regular-expression";
}
}
tacplus-options {
  service-name service-name;
  (no-cmd-attribute-value | exclude-cmd-attribute);
}
tacplus-server server-address {
  port
  secret password;
  single-connection;
  source-address source-address;
  timeout seconds;
}
time-zone (GMThour-offset | time-zone);
}
tracing {
  destination-override {
    syslog host;
  }
}
use-imported-time-zones;
}

```

### [\[edit vlans\] Hierarchy](#)

```

vlans {
  vlan-name {
    description text-description;
    dot1q-tunneling {
      customer-vlans (id | range);
    }
  }
}

```



```
filter input filter-name;  
filter output filter-name;  
interface interface-name {  
    isolated;  
    mapping (policy | tag push | native push);  
    promiscuous;  
}  
isolation-vlan-id;  
l3-interface vlan.logical-interface-number;  
mac-limit number;  
mac-table-aging-time seconds;  
no-local-switching;  
no-mac-learning;  
primary-vlan vlan-name;  
pvlan extend-secondary-vlan-id vlan-id;  
vlan-id number;  
vlan-range vlan-id-low-vlan-id-high;  
}  
}
```

---

## access-end

Syntax	access-end <i>HH:MM</i> ;
Hierarchy Level	[edit system <a href="#">login</a> class]
Release Information	Statement introduced in Junos OS Release 11.1 for the QFX Series.
Description	Configure the end time for login access.
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li><a href="#">Configuring Time-Based User Access on page 136</a></li></ul>

---

## access-start

Syntax	access-start <i>HH:MM</i> ;
Hierarchy Level	[edit system <a href="#">login</a> class]
Release Information	Statement introduced in Junos OS Release 11.1 for the QFX Series.
Description	Configure the start time for login access.
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li><a href="#">Configuring Time-Based User Access on page 136</a></li></ul>



## accounting

```
Syntax  accounting {
        destination {
            radius {
                server {
                    server-address {
                        accounting-port port-number;
                        secret password;
                        source-address address;
                        retry number;
                        timeout seconds;
                    }
                }
            }
        }
        tacplus {
            server {
                server-address {
                    port port-number;
                    secret password;
                    single-connection;
                    timeout seconds;
                }
            }
        }
    }
```

**Hierarchy Level** [edit system]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure audit of TACACS+ or RADIUS authentication events, configuration changes, and interactive commands.

**Options** The remaining statements are explained separately.

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring RADIUS Accounting on page 1217](#)
- [Configuring TACACS+ System Accounting on page 1233](#)



## accounting-port

---

Syntax	accounting-port <i>port-number</i> ;
Hierarchy Level	[edit system accounting destination radius server <i>server-address</i> ], [edit system radius server <i>server-address</i> ]
Release Information	Statement introduced in Junos OS Release 11.1 for the QFX Series.
Description	Configure the accounting port number on which to contact the RADIUS server.
Options	<i>number</i> —Port number on which to contact the RADIUS server. Default: 1813
Required Privilege Level	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring RADIUS Accounting on page 1217</a></li></ul>

## allow-commands

---

Syntax	allow-commands " <i>regular-expression</i> ";
Hierarchy Level	[edit system login class <i>class-name</i> ]
Release Information	Statement introduced in Junos OS Release 11.1 for the QFX Series.
Description	Specify the operational mode commands that members of a login class can use.
Default	If you omit this statement and the <b>deny-commands</b> statement, users can issue only those commands for which they have access privileges through the <b>permissions</b> statement.
Options	<i>regular-expression</i> —Extended (modern) regular expression as defined in POSIX 1003.2. If the regular expression contains any spaces, operators, or wildcard characters, enclose it in quotation marks.
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Specifying Access Privileges for Junos OS Operational Mode Commands on page 153</a></li><li>• <a href="#">deny-commands on page 221</a></li><li>• <a href="#">user on page 276</a></li></ul>



## allow-configuration

---

<b>Syntax</b>	<code>allow-configuration "regular-expression";</code>
<b>Hierarchy Level</b>	[edit system login class <i>class-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Explicitly allow configuration access to the specified levels in the hierarchy even if the permissions set with the <b>permissions</b> statement do not grant such access by default.
<b>Default</b>	If you omit this statement and the <b>deny-configuration</b> statement, users can edit only those commands for which they have access privileges through the <b>permissions</b> statement.
<b>Options</b>	<b>regular-expression</b> —Extended (modern) regular expression as defined in POSIX 1003.2. If the regular expression contains any spaces, operators, or wildcard characters, enclose it in quotation marks.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Specifying Access Privileges for Junos OS Configuration Mode Hierarchies on page 1238</a></li> <li>• <a href="#">Regular Expressions for Allowing and Denying Junos OS Configuration Mode Hierarchies on page 1205</a></li> <li>• <a href="#">deny-configuration on page 222</a></li> <li>• <a href="#">user on page 276</a></li> </ul>

## allowed-days

---

<b>Syntax</b>	<code>allowed-days [ <i>days-of-the-week</i> ];</code>
<b>Hierarchy Level</b>	[edit system <b>login</b> class <i>class-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify the days of the week when users can log in.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Time-Based User Access on page 136</a></li> </ul>



## allow-transients

---

<b>Syntax</b>	allow-transients;
<b>Hierarchy Level</b>	[edit systems scripts commit]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Junos OS commit scripts, enable transient configuration changes to be committed.
<b>Default</b>	Transient changes are disabled by default. If you do not include the <b>allow-transients</b> statement, and an enabled script generates transient changes, the command-line interface (CLI) generates an error message and the commit operation fails.
<b>Required Privilege Level</b>	maintenance—To view this statement in the configuration. maintenance-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Generating a Persistent or Transient Change</li><li>• Creating a Macro to Read the Custom Syntax and Generate Related Configuration Statements</li></ul>



## announcement

---

<b>Syntax</b>	announcement <i>text</i> ;
<b>Hierarchy Level</b>	[edit system login]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure a system login announcement. This announcement appears after a user logs in.
<b>Options</b>	<i>text</i> —Text of the announcement. If the text contains any spaces, enclose it in quotation marks.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Configuring the Junos OS to Display a System Login Announcement</li><li>• <a href="#">Configuring the Junos OS to Display a System Login Message on page 127</a></li><li>• <a href="#">message on page 235</a></li></ul>



## archival

<b>Syntax</b>	<pre> archival {   configuration {     archive-sites {       file://&lt;path&gt;/&lt;filename&gt;;       ftp://username@host:&lt;port&gt;url-path password password;       http://username@host:&lt;port&gt;url-path password password;       pasvftp://username@host:&lt;port&gt;url-path password password;       scp://username@host:&lt;port&gt;url-path password password;     }     transfer-interval interval;     transfer-on-commit;   } } </pre>
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>
<b>Description</b>	Configure copying of the currently active configuration to an archive site. An archive site can be a file, or an FTP or SCP location.
	<div>  <p><b>NOTE:</b> The <code>edit system archival</code> hierarchy is not available on QFabric systems.</p> </div>
<b>Options</b>	The remaining statements are explained separately.
	<div>  <p><b>NOTE:</b> The <code>[edit system archival]</code> hierarchy is not available on QFabric systems.</p> </div>
<b>Required Privilege Level</b>	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Using Junos OS to Configure a Router or Switch to Transfer Its Configuration to an Archive Site on page 1133</li> </ul>



## arp (System)

---

**Syntax**

```
arp {
  aging-timer minutes;
  gratuitous-arp-delay seconds;
  gratuitous-arp-on-ifup;
  interfaces {
    interface-name {
      aging-timer minutes;
    }
  }
  passive-learning;
  purging;
}
```

For EX-Series switches:

```
arp {
  aging-timer minutes;
}
```

**Hierarchy Level** [edit system]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Specify ARP options. You can enable backup VRRP routers to learn ARP requests for VRRP-IP to VRRP-MAC address translation. You can also set the time interval between ARP updates.

For EX-Series switches, set only the time interval between ARP updates.

**Options** **aging-timer**—Time interval in minutes between ARP updates. In environments where the number of ARP entries to update is high (for example, on routers only, metro Ethernet environments), increasing the time between updates can improve system performance.

**passive-learning** (QFX-Series only)—Configure switches to learn the ARP mappings (IP-to-MAC address) for hosts sending the requests.

**Default:** 20 minutes

**Range:** 5 to 240 minutes

The remaining statements are explained separately.

**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.

**Related Documentation**

- Configuring the Junos OS ARP Learning and Aging Options for Mapping IPv4 Network Addresses to MAC Addresses
- Junos® OS Network Interfaces



- For more information about ARP updates, see the [Junos OS System Basics Configuration Guide](#).

## authentication (Login)

<b>Syntax</b>	<pre>authentication {   encrypted-password <i>password</i>;   load-key-file <i>URL</i>;   plain-text-password <i>password</i>;   remote-debug-permission (qfabric-admin   qfabric-operator   qfabric-user);   ssh-dsa "<i>public-key</i>";   ssh-rsa "<i>public-key</i>"; }</pre>
<b>Hierarchy Level</b>	[edit system login user <i>username</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Authentication methods that a user can use to log in to the switch. You can assign multiple authentication methods to a single user.
<b>Options</b>	<p><b>encrypted-password "<i>password</i>"</b>—Message Digest 5 (MD5) or other encrypted authentication. Specify the MD5 or other password. You can specify only one encrypted password for each user.</p> <p>You cannot configure a blank password for <b>encrypted-password</b> using blank quotation marks (" "). You must configure a password of 1 through 128 characters and enclose the password in quotation marks.</p> <p><b>load-key-file</b>—Load RSA (SSH version 1 and SSH version 2) and DSA (SSH version 2) public keys from a file. The file is a URL containing one or more SSH keys.</p> <p><b>plain-text-password</b>—Plain-text password. The command-line interface (CLI) prompts you for the password and then encrypts it.</p> <p><b>remote-debug-permission</b> (QFabric systems only)—QFabric component authentication. Specifies permission levels for users to access individual components in a QFabric system.</p> <p><b>ssh-dsa "<i>public-key</i>"</b>—SSH version 2 authentication. Specify the SSH public key. You can specify one or more public keys for each user.</p> <p><b>ssh-rsa "<i>public-key</i>"</b>—SSH version 1 and SSH version 2 authentication. Specify the SSH public key. You can specify one or more public keys for each user.</p>
<b>Required Privilege Level</b>	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Junos OS User Accounts on page 1213</a></li> <li>• <a href="#">root-authentication on page 250</a></li> </ul>



## authentication-key

---

<b>Syntax</b>	<code>authentication-key <i>key-number</i> type <i>type</i> value <i>password</i>;</code>
<b>Hierarchy Level</b>	[edit system ntp]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Configure Network Time Protocol (NTP) authentication keys so that the router or switch can send authenticated packets. If you configure the router or switch to operate in authenticated mode, you must configure a key.</p> <p>Both the keys and the authentication scheme (MD5) must be identical between a set of peers sharing the same key number.</p>
<b>Options</b>	<p><b><i>key-number</i></b>—An integer in the range of 1 to 65533.</p> <p><b><i>type type</i></b>—Authentication type. It can only be <b>md5</b>.</p> <p><b><i>value password</i></b>—Key itself, consisting of 1 through 8 ASCII characters. If the key contains spaces, enclose it in quotation marks.</p>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring NTP Authentication Keys (QFabric System) on page 130</a></li><li>• <a href="#">NTP Time Server and Time Services Overview (QFabric System) on page 34</a></li></ul>



## authentication-order

---

<b>Syntax</b>	<code>authentication-order [ <i>authentication-methods</i> ];</code>
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the order in which the software tries different user authentication methods when attempting to authenticate a user. For each login attempt, the software tries the authentication methods in order, starting with the first one, until the password matches.
<b>Default</b>	If you do not include the <b>authentication-order</b> statement, users are verified based on their configured passwords.
<b>Options</b>	<p><b><i>authentication-methods</i></b>—One or more authentication methods, listed in the order in which they should be tried. The method can be one or more of the following:</p> <ul style="list-style-type: none"> <li>• <b>password</b>—Use the password configured for the user with the <b>authentication</b> statement at the [edit system login user] hierarchy level.</li> <li>• <b>radius</b>—Use RADIUS authentication services.</li> <li>• <b>tacplus</b>—Use TACACS+ authentication services.</li> </ul>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the Junos OS Authentication Order for RADIUS, TACACS+, and Local Password Authentication on page 1214</a></li> <li>• <a href="#">authentication on page 207</a></li> </ul>



## auxiliary

---

<b>Syntax</b>	<pre>auxiliary {   disable;   insecure;   type <i>terminal-type</i>; }</pre>
<b>Hierarchy Level</b>	[edit system ports]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the characteristics of the auxiliary port.
<b>Default</b>	The auxiliary port is disabled.
<b>Options</b>	<p><b>disable</b>—Disable the port.</p> <p><b>insecure</b>—Disable superuser access or root logins to establish a terminal connection.</p> <p><b>type <i>terminal-type</i></b>—Type of terminal that is connected to the port.</p> <p><b>Range:</b> ansi, vt100, small-xterm, xterm</p> <p><b>Default:</b> The terminal type is unknown, and the user is prompted for the terminal type.</p>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Console and Auxiliary Port Properties on page 5521</a></li></ul>



## boot-server (NTP)

---

<b>Syntax</b>	<code>boot-server (address   hostname);</code>
<b>Hierarchy Level</b>	[edit system <a href="#">ntp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Configure the server that NTP queries when the router or switch boots to determine the local date and time.</p> <p>When you boot the router or switch, it issues an <b>ntpdate</b> request, which polls a network server to determine the local date and time. You need to configure a server that the router or switch uses to determine the time when the router or switch boots. Otherwise, NTP cannot synchronize to a time server if the server time significantly differs from the local router's or switch's time. You can configure either an IP address or a hostname for the boot server. If you configure a hostname instead of an IP address, the <b>ntpdate</b> request resolves the hostname to an IP address when the router or switch boots up.</p>
<b>Options</b>	<ul style="list-style-type: none"> <li>• <b>address</b>—IP address of an NTP boot server.</li> <li>• <b>hostname</b>—Hostname of an NTP boot server.</li> </ul>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Synchronizing and Coordinating Time Distribution Using NTP on page 155</a></li> </ul>



## broadcast

---

<b>Syntax</b>	<code>broadcast address &lt;key key-number&gt; &lt;version value&gt; &lt;tll value&gt;;</code>
<b>Hierarchy Level</b>	[edit system <a href="#">ntp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the local router or switch to operate in broadcast mode with the remote system at the specified address to send periodic broadcast messages to a client population. Normally, you include this statement only when the local router or switch is operating as a transmitter.
<b>Options</b>	<p><b>address</b>—Broadcast address on one of the local networks or a multicast address assigned to NTP. You must specify an address, not a hostname. If the multicast address is used, it must be <b>224.0.1.1</b>.</p> <p><b>key key-number</b>—(Optional) All packets sent to the address include authentication fields that are encrypted using the specified key number (any unsigned 32-bit integer).</p> <p><b>tll value</b>—(Optional) Time-to-live (TTL) value to use. <b>Range:</b> 1 through 255 <b>Default:</b> 1</p> <p><b>version value</b>—(Optional) Specify the version number to be used in outgoing NTP packets. <b>Range:</b> 1 through 4 <b>Default:</b> 4</p>
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring the NTP Time Server and Time Services on page 131</a></li></ul>



## broadcast-client

---

<b>Syntax</b>	<code>broadcast-client;</code>
<b>Hierarchy Level</b>	<code>[edit system <a href="#">ntp</a>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the local router or switch to listen for broadcast messages on the local network to discover other servers on the same subnet.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the Router or Switch to Listen for Broadcast Messages Using NTP on page 135</a></li> </ul>

## change-type

---

<b>Syntax</b>	<code>change-type (character-sets   set-transitions);</code>
<b>Hierarchy Level</b>	<code>[edit system login password]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Set requirements for using character sets in plain-text passwords. When you combine this statement with the <b>minimum-changes</b> statement, you can check for the total number of character sets included in the password or for the total number of character-set changes in the password. Newly created passwords must meet these requirements.
<b>Options</b>	Specify one of the following: <ul style="list-style-type: none"> <li>• <b>character-sets</b>—Number of character sets in the password. Valid character sets include uppercase letters, lowercase letters, numbers, punctuation, and other special characters.</li> <li>• <b>set-transitions</b>—Number of transitions between character sets.</li> </ul>
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Special Requirements for Junos OS Plain-Text Passwords on page 1207</a></li> <li>• <a href="#">minimum-changes on page 235</a></li> </ul>



## checksum

---

<b>Syntax</b>	<code>checksum (md5   sha-256   sha1) <i>hash</i>;</code>
<b>Hierarchy Level</b>	[edit event-options event-script file <i>filename</i> ], [edit system scripts commit file <i>filename</i> ],
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Junos commit scripts and op scripts, specify the MD5, SHA-1, or SHA-256 checksum hash. When it executes a local event or commit script, the Junos OS verifies the authenticity of the script by using the configured checksum hash.
<b>Options</b>	<b>md5 <i>hash</i></b> —MD5 checksum of this script.  <b>sha-256 <i>hash</i></b> —SHA-256 checksum of this script.  <b>sha1 <i>hash</i></b> —SHA-1 checksum of this script.
<b>Required Privilege Level</b>	<b>maintenance</b> —To view this statement in the configuration. <b>maintenance-control</b> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Configuring Checksum Hashes for a Commit Script</li><li>• Configuring Checksum Hashes for an Event Script</li><li>• Configuring Checksum Hashes for an Op Script</li><li>• <a href="#">file checksum md5 on page 296</a></li><li>• <a href="#">file checksum sha-256 on page 298</a></li><li>• <a href="#">file checksum sha1 on page 297</a></li></ul>



## class (Defining Login Classes)

<b>Syntax</b>	<pre> class <i>class-name</i> {   access-end;   access-start;   allow-commands "<i>regular-expression</i>";   allow-configuration "<i>regular-expression</i>";   deny-commands "<i>regular-expression</i>";   deny-configuration "<i>regular-expression</i>";   idle-timeout <i>minutes</i>;   login-tip;   permissions [ <i>permissions</i> ]; } </pre>
<b>Hierarchy Level</b>	[edit system login]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Define a login class.
<b>Options</b>	<p><b><i>class-name</i></b>—A name you choose for the login class.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Defining Junos OS Login Classes on page 1235</a></li> <li>• <a href="#">user on page 276</a></li> </ul>



## class (Assigning a Class to an Individual User)

---

<b>Syntax</b>	<pre>class <i>class-name</i> {     operator;     read-only;     super-user;     unauthorized; }</pre>
<b>Hierarchy Level</b>	[edit system login user <i>username</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure a user's login class. You must configure one class for each user.
<b>Options</b>	<i>class-name</i> —One of the classes defined at the [edit system login class] hierarchy level.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Junos OS User Accounts on page 1213</a></li></ul>




## commit

<b>Syntax</b>	<pre> commit {   allow-transients;   direct-access;   file <i>filename</i> {     checksum (md5   sha-256   sha1) <i>hash</i>;     optional;     refresh;     refresh-from <i>url</i>;     sourceurl;   }   refresh;   refresh-from <i>url</i>;   traceoptions {     file &lt;<i>filename</i>&gt; &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i>;     no-remote-trace;   } } </pre>
<b>Hierarchy Level</b>	[edit system scripts]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Junos OS commit scripts, configure the commit-time scripting mechanism.
<b>Options</b>	The statements are explained separately.
<b>Required Privilege Level</b>	maintenance—To view this statement in the configuration. maintenance-control—To add this statement to the configuration.



## compress-configuration-files (System)

---

<b>Syntax</b>	(compress-configuration-files   no-compress-configuration-files);
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Compress the current operational configuration file. The file is stored in the file <b>juniper.conf</b>, in the <b>/config</b> file system, along with the last three committed versions of the configuration. However, with large networks, the current configuration file might exceed the available space in the <b>/config</b> file system. Compressing the current configuration file allows the file to fit in the file system, typically reducing the size of the file by 90 percent. The current configuration file is compressed on the second commit of the configuration after the first commit is made to include the <b>compress-configuration-files</b> statement.</p>
	<div><p><b>NOTE:</b> We recommend that you enable compression of the configuration files to minimize the amount of disk space that they require.</p></div>
<b>Default</b>	The current operational configuration file is uncompressed.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Compressing the Current Configuration File on page 1117</a></li></ul>



## console (Physical Port)

<b>Syntax</b>	<pre>console {   disable;   insecure;   log-out-on-disconnect;   type <i>terminal-type</i>; }</pre>
<b>Hierarchy Level</b>	[edit system ports]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the characteristics of the console port.
<b>Default</b>	The console port is enabled and its speed is 9600 baud.
<b>Options</b>	<p><b>disable</b>—Disable console login connections.</p> <p><b>insecure</b>—Disable root login connections to the console and auxiliary ports. Configuring the console port as insecure also prevents superusers and anyone with a user identifier (UID) of 0 from establishing terminal connections in multiuser mode. This option can be used to prevent a user from attempting password recovery by booting into single-user mode, if the user does not know the root password.</p> <p><b>log-out-on-disconnect</b>—Log out the session when the data carrier on the console port is lost.</p> <p><b>type <i>terminal-type</i></b>—Type of terminal that is connected to the port: <b>ansi</b>, <b>vt100</b>, <b>small-xterm</b>, or <b>xterm</b>.</p>
<b>Required Privilege Level</b>	<p><b>system</b>—To view this statement in the configuration.</p> <p><b>system-control</b>—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Console and Auxiliary Port Properties on page 5521</a></li> </ul>



## default-address-selection

---

<b>Syntax</b>	default-address-selection;
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Use the loopback interface, <b>lo0</b>, as the source address for all locally generated IP packets when the packet is sent through a routed interface, but not when the packet is sent through a local interface such as <b>fxp0</b>. The <b>lo0</b> interface is the interface to the switch's Routing Engine.</p>
<b>Default</b>	<p>The default address is used as the source address for all locally generated IP packets on outgoing interfaces that are unnumbered. If an outgoing interface is numbered, the default address is chosen using the following sequence:</p> <ul style="list-style-type: none"><li>• The primary address on the loopback interface <b>lo0</b> that is <i>not</i> <b>127.0.0.1</b> is used.</li><li>• The primary address for the primary interface or the preferred address (if configured) for the primary interface is used.</li></ul> <p>By default, the primary address on an interface is selected as the numerically lowest local address configured on the interface.</p> <p>An interface's <i>primary address</i> is used by default as the local address for broadcast and multicast packets sourced locally and sent out through the interface. An interface's <i>preferred address</i> is the default local address used for packets sourced by the local switch to destinations on the subnet. By default, the numerically lowest local address configured for the interface is chosen as the preferred address on the subnet.</p> <p>To configure a different primary address or preferred address, include the <b>primary</b> or <b>preferred</b> statement at the [edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>family</i> address <i>address</i>] or [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>family</i> address <i>address</i>] hierarchy levels.</p>
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring the Junos OS to Select a Fixed Source Address for Locally Generated TCP/IP Packets on page 129</a></li><li>• Junos® OS Network Interfaces</li></ul>



---

## deny-commands

---

<b>Syntax</b>	<code>deny-commands "regular-expression";</code>
<b>Hierarchy Level</b>	[edit system login class]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify the operational mode commands that the user is denied permission to issue even though the permissions set with the <b>permissions</b> statement would allow their use.
<b>Default</b>	If you omit this statement and the <b>allow-commands</b> statement, users can issue only those commands for which they have access privileges through the <b>permissions</b> statement.
<b>Options</b>	<b>regular-expression</b> —Extended (modern) regular expression as defined in POSIX 1003.2. If the regular expression contains any spaces, operators, or wildcard characters, enclose it in quotation marks.
<b>Required Privilege Level</b>	<b>admin</b> —To view this statement in the configuration. <b>admin-control</b> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Specifying Access Privileges for Junos OS Operational Mode Commands on page 153</a></li><li>• <a href="#">allow-commands on page 202</a></li><li>• <a href="#">user on page 276</a></li></ul>



## deny-configuration

---

<b>Syntax</b>	<code>deny-configuration "regular-expression";</code>
<b>Hierarchy Level</b>	[edit system login class]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Explicitly deny configuration access to the specified levels in the hierarchy even if the permissions set with the <b>permissions</b> statement grant such access by default.
<b>Default</b>	If you omit this statement and the <b>allow-configuration</b> statement, users can edit those levels in the configuration hierarchy for which they have access privileges through the <b>permissions</b> statement.
<b>Options</b>	<b>regular-expression</b> —Extended (modern) regular expression as defined in POSIX 1003.2. If the regular expression contains any spaces, operators, or wildcard characters, enclose it in quotation marks.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Specifying Access Privileges Using allow/deny-configuration Statements</li><li>• <a href="#">allow-configuration on page 203</a></li><li>• <a href="#">user on page 276</a></li></ul>



## destination (Accounting)

```
Syntax destination {
    radius {
        server {
            server-address {
                accounting-port port-number;
                secret password;
                source-address address;
                retry number;
                timeout seconds;
            }
        }
    }
    tacplus {
        server {
            server-address {
                port port-number;
                secret password;
                single-connection;
                timeout seconds;
            }
        }
    }
}
```

**Hierarchy Level** [edit system accounting]

**Release Information** Statement introduced before Junos OS Release 7.4.  
**radius** statement added in Junos OS Release 7.4.  
 Statement introduced in Junos OS Release 9.0 for EX Series switches.  
 Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure the authentication server.

**Options** The remaining statements are explained separately.

**Required Privilege Level** system—To view this statement in the configuration.  
 system-control—To add this statement to the configuration.

**Related Documentation**

- Configuring RADIUS System Accounting
- Configuring TACACS+ System Accounting



## destination-override

---

<b>Syntax</b>	<code>destination-override {   syslog host <i>ip-address</i>; }</code>
<b>Hierarchy Level</b>	[edit system tracing]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Override the system-wide configuration of the switch at the <b>[edit system tracing]</b> hierarchy level. This statement has no effect if system tracing is not configured.
<b>Options</b>	<b>syslog</b> —System process log files to send to the remote tracing host. <ul style="list-style-type: none"><li>• <b>syslog</b>—System process log files to send to the remote tracing host.</li><li>• <b>host <i>ip-address</i></b>—IP address to which to send tracing information.</li></ul>
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding Tracing and Logging Operations on page 5433</a></li><li>• <a href="#">tracing on page 274</a></li></ul>

## direct-access

---

<b>Syntax</b>	<code>direct-access;</code>
<b>Hierarchy Level</b>	[edit system scripts commit]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify that commit scripts read input configurations directly from the database when inspecting these scripts for errors.
<b>Required Privilege Level</b>	maintenance—To view this statement in the configuration. maintenance-control—To add this statement to the configuration.
<b>Related Documentation</b>	



## domain-name

---

<b>Syntax</b>	<code>domain-name <i>domain-name</i>;</code>
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the name of the domain in which the switch is located. This is the default domain name that is appended to hostnames that are not fully qualified.
<b>Options</b>	<i>domain-name</i> —Name of the domain.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the Domain Name for the Router or Switch on page 124</a></li> <li>• <a href="#">Example: Configuring the Domain Name for the Router or Switch on page 157</a></li> </ul>

## domain-search

---

<b>Syntax</b>	<code>domain-search <i>domain-list</i>;</code>
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure a list of domains to be searched.
<b>Options</b>	<i>domain-list</i> —List of domain names to search. The list can contain up to 6 domain names, with a total of up to 256 characters.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the Domains to Search When a Router or Switch Is Included in Multiple Domains on page 124</a></li> </ul>



## explicit-priority

---

<b>Syntax</b>	<pre>explicit-priority {   archive &lt;files <i>number</i>&gt; &lt;size <i>size</i> &lt;start-time<i>time</i>&gt; &lt;transfer-interval     <i>interval</i>&gt;&lt;world-readable   no-world-readable&gt;;   archive-sites {     file://&lt;path&gt;/&lt;filename&gt;;     ftp://username@host:&lt;port&gt;url-path password password;     scp://username@host:&lt;port&gt;url-path password password;   }   structured-data {     brief;   } }</pre>
<b>Hierarchy Level</b>	[edit system syslog file <i>filename</i> ], [edit system syslog host]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Record the priority (facility and severity level) in each standard-format system log message directed to a file or remote destination.</p> <p>When the <b>structured-data</b> statement is also included at the <b>[edit system syslog file <i>filename</i>]</b> hierarchy level, this statement is ignored for the file.</p>
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Including Priority Information in System Log Messages on page 5557</a></li></ul>



## events

<b>Syntax</b>	<code>events [ <i>events</i> ];</code>
<b>Hierarchy Level</b>	[edit system accounting]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the types of events to track and log.
<b>Options</b>	<p><b>events</b>—Event types; can be one or more of the following:</p> <ul style="list-style-type: none"> <li>• <b>change-log</b>—Audit configuration changes.</li> <li>• <b>interactive-commands</b>—Audit interactive commands (any command-line input).</li> <li>• <b>login</b>—Audit logins.</li> </ul>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring TACACS+ System Accounting on page 1233</a></li> </ul>

## format

<b>Syntax</b>	<code>format (des   md5   sha1);</code>
<b>Hierarchy Level</b>	[edit system login password]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the authentication algorithm for plain-text passwords.
<b>Default</b>	For Junos OS, the default encryption format is <b>md5</b> . For Junos OS-FIPS software, the default encryption format is <b>sha1</b> .
<b>Options</b>	<p>The hash algorithm that authenticates the password can be one of three algorithms:</p> <ul style="list-style-type: none"> <li>• <b>des</b>—Has a block size of 8 bytes; its key size is 48 bits long.</li> <li>• <b>md5</b>—Produces a 128-bit digest.</li> <li>• <b>sha1</b>—Produces a 160-bit digest.</li> </ul>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Special Requirements for Junos OS Plain-Text Passwords on page 1207</a></li> </ul>



## host-name

---

<b>Syntax</b>	<code>host-name <i>hostname</i>;</code>
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Set the hostname of the switch.
<b>Options</b>	<i>hostname</i> —Name of the switch.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring the Hostname of the Router or Switch on page 125</a></li></ul>

## icmpv4-rate-limit

---

<b>Syntax</b>	<code>icmpv4-rate-limit {     bucket-size <i>seconds</i>;     packet-rate <i>pps</i>; }</code>
<b>Hierarchy Level</b>	[edit system internet-options]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure rate-limiting parameters for ICMPv4 messages sent.
<b>Options</b>	<b>bucket-size <i>seconds</i></b> —Number of seconds in the rate-limiting bucket. <b>Range:</b> 0 through 4294967295 seconds <b>Default:</b> 5  <b>packet-rate <i>pps</i></b> —Rate-limiting packets earned per second. <b>Range:</b> 0 through 4294967295 pps <b>Default:</b> 1000
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• ping</li><li>• Configuring the Junos OS ICMPv4 Rate Limit for ICMPv4 Routing Engine Messages</li><li>• Configuring the Junos OS ICMPv6 Rate Limit for ICMPv6 Routing Engine Messages</li></ul>



## idle-timeout

<b>Syntax</b>	<code>idle-timeout <i>minutes</i>;</code>
<b>Hierarchy Level</b>	<code>[edit system login class <i>class-name</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For a login class, configure the maximum time that a session can be idle before the user is logged off the switch. The session times out after remaining at the CLI operational mode prompt for the specified time.
<b>Default</b>	If you omit this statement, a user is never forced off the system after extended idle times.
<b>Options</b>	<i>minutes</i> —Maximum idle time. <b>Range:</b> 0 through 4294967295 minutes
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the Timeout Value for Idle Login Sessions on page 137</a></li> </ul>

## internet-options

<b>Syntax</b>	<pre>internet-options {     icmpv4-rate-limit bucket-size <i>bucket-size</i> packet-rate <i>packet-rate</i>;     source-port upper-limit <i>upper-limit</i>; }</pre>
<b>Hierarchy Level</b>	<code>[edit system]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Configure system IP options to protect against certain types of denial-of-service (DoS) attacks.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the Junos OS ICMPv4 Rate Limit for ICMPv4 Routing Engine Messages on page 129</a></li> <li>• <a href="#">Configuring the Junos OS to Extend the Default Port Address Range on page 128</a></li> </ul>



## load-key-file

---

<b>Syntax</b>	<code>load-key-file URL filename;</code>
<b>Hierarchy Level</b>	[edit system root-authentication], [edit system login user <i>username</i> authentication]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Load RSA (SSH version 1 and SSH version 2) and DSA or ECDSA (SSH version 2) public keys from a previously-generated named file at a specified URL location. The file contains one or more SSH keys that are copied into the configuration when the command is issued.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Configuring the Root Password</li><li>• <a href="#">Configuring the Root Password on page 1222</a></li><li>• Configuring Junos OS User Accounts</li><li>• <a href="#">Configuring Junos OS User Accounts on page 1213</a></li></ul>



## location

<b>Syntax</b>	<pre>location {   altitude <i>feet</i>;   building <i>name</i>;   country-code <i>code</i>;   floor <i>number</i>;   hcoord <i>horizontal-coordinate</i>;   lata <i>service-area</i>;   latitude <i>degrees</i>;   longitude <i>degrees</i>;   npa-nxx <i>number</i>;   postal-code <i>postal-code</i>;   rack <i>number</i>;   vcoord <i>vertical-coordinate</i>; }</pre>
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the system location.
<b>Options</b>	<p><b>altitude <i>feet</i></b>—Number of feet above sea level.</p> <p><b>building <i>name</i></b>—Name of the building. The name of the building can be 1 to 28 characters in length. If the string contains spaces, enclose it in quotation marks (" ").</p> <p><b>country-code <i>code</i></b>—Two-letter country code.</p> <p><b>floor <i>number</i></b>—Floor in the building.</p> <p><b>hcoord <i>horizontal-coordinate</i></b>—Bellcore Horizontal Coordinate.</p> <p><b>lata <i>service-area</i></b>—Long-distance service area.</p> <p><b>latitude <i>degrees</i></b>—Latitude in degree format.</p> <p><b>longitude <i>degrees</i></b>—Longitude in degree format.</p> <p><b>npa-nxx <i>number</i></b>—First six digits of the phone number (area code and exchange).</p> <p><b>postal-code <i>postal-code</i></b>—Postal code.</p> <p><b>rack <i>number</i></b>—Rack number.</p> <p><b>vcoord <i>vertical-coordinate</i></b>—Bellcore Vertical Coordinate.</p>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Specifying the Physical Location of the Switch on page 134</a></li> </ul>



## login

```
Syntax login {
    announcement text;
    class class-name {
        access-end "regular-expression";
        access-start "regular-expression";
        allow-commands "regular-expression";
        allow-configuration "regular-expression";
        deny-commands "regular-expression";
        deny-configuration "regular-expression";
        idle-timeout minutes;
        login-tip;
        permissions [ permissions ];
    }
    message text;
    password {
        change-type (set-transitions | character-set);
        format (md5 | sha1 | des);
        maximum-length length;
        minimum-changes number;
        minimum-length length;
    }
    retry-options {
        backoff-factor seconds;
        backoff-threshold number;
        minimum-time seconds;
        tries-before-disconnect number;
    }
    user username {
        authentication authentication;
        (encrypted-password "password" | plain-text-password);
        load-key-file URL;
        remote-debug-permission (qfabric-admin | qfabric-operator | qfabric-user);
        ssh-dsa "public-key";
        ssh-rsa "public-key";
    }
    class class-name;
    full-name complete-name;
    uid uid-value;
}
```

**Hierarchy Level** [edit system]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure user access to the switch.

**Options** The remaining statements are explained separately.

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.



- Related Documentation**
- [Defining Junos OS Login Classes on page 1235](#)

## login-alarms

---

<b>Syntax</b>	login-alarms;
<b>Hierarchy Level</b>	[edit system login class <i>class-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Show system alarms automatically when an <b>admin</b> user logs in to the router or switch.
<b>Options</b>	<i>class-name</i> —Login class name.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring System Alarms to Appear Automatically Upon Login on page 136</a></li> </ul>

## login-tip

---

<b>Syntax</b>	login-tip;
<b>Hierarchy Level</b>	[edit system login class <i>class-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Enable CLI tips at login.
<b>Default</b>	Disabled.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring CLI Tips on page 48</a></li> </ul>



## max-configurations-on-flash

---

<b>Syntax</b>	max-configurations-on-flash <i>number</i> ;
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify the number of configurations stored on the internal fixed media storage (for example, USB device).
<b>Options</b>	<i>number</i> —The number of configurations stored on the CompactFlash card. <b>Range:</b> 0 through 49. The most recently saved configuration is number 0, and the oldest saved configuration is number 49.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	

## maximum-length

---

<b>Syntax</b>	maximum-length <i>length</i> ;
<b>Hierarchy Level</b>	[edit system login passwords]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify the maximum number of characters allowed in plain-text passwords. Newly created passwords must meet this requirement.
<b>Default</b>	For Junos OS-FIPS software, the maximum number of characters for plain-text passwords is 20. For Junos OS, no maximum is set.
<b>Options</b>	<i>length</i> —Maximum number of characters the password can include. <b>Range:</b> 1 to 64 characters
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Special Requirements for Junos OS Plain-Text Passwords on page 1207</a></li><li>• <a href="#">minimum-length on page 236</a></li></ul>



## message

---

<b>Syntax</b>	<code>message text;</code>
<b>Hierarchy Level</b>	[edit system login]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure a system login message. This message appears before a user logs in.
<b>Options</b>	<i>text</i> —Text of the message.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the Junos OS to Display a System Login Message on page 127</a></li> <li>• <a href="#">announcement on page 204</a></li> </ul>

## minimum-changes

---

<b>Syntax</b>	<code>minimum-changes number;</code>
<b>Hierarchy Level</b>	[edit system login passwords]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Specify the minimum number of character sets (or character set changes) required in plain-text passwords. Newly created passwords must meet this requirement.</p> <p>This statement is used in combination with the <b>change-type</b> statement. If the change type is <b>character-sets</b>, then the number of character sets included in the password is checked against the specified minimum. If the change type is <b>set-transitions</b>, then the number of character set changes in the password is checked against the specified minimum.</p>
<b>Default</b>	For Junos OS, the minimum number of changes is 1. For Junos-FIPS software, the minimum number of changes is 3.
<b>Options</b>	<i>number</i> —Minimum number of character sets (or character set changes) required for the password.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Special Requirements for Junos OS Plain-Text Passwords on page 1207</a></li> <li>• <a href="#">change-type on page 213</a></li> </ul>



## minimum-length

---

<b>Syntax</b>	minimum-length <i>length</i> ;
<b>Hierarchy Level</b>	[edit system login password]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify the minimum number of characters required in plain-text passwords. Newly created passwords must meet this requirement.
<b>Default</b>	For Junos OS, the minimum number of characters for plain-text passwords is six. For Junos-FIPS software, the minimum number of characters for plain-text passwords is 10.
<b>Options</b>	<b>length</b> —Minimum number of characters the password must include. <b>Range:</b> 6 to 20 characters
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Special Requirements for Junos OS Plain-Text Passwords on page 1207</a></li><li>• <a href="#">maximum-length on page 234</a></li></ul>

## multicast-client

---

<b>Syntax</b>	multicast-client < <i>address</i> >;
<b>Hierarchy Level</b>	[edit system <a href="#">ntp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Network Time Protocol (NTP), configure the local router or switch to listen for multicast messages on the local network to discover other servers on the same subnet.
<b>Options</b>	<b>address</b> —(Optional) One or more IP addresses. If you specify addresses, the router or switch joins those multicast groups. <b>Default:</b> 224.0.1.1.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring the Router or Switch to Listen for Multicast Messages Using NTP on page 135</a></li></ul>



---

## name-server

---

<b>Syntax</b>	<code>name-server {     <i>address</i>; }</code>
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure one or more Domain Name System (DNS) name servers.
<b>Options</b>	<i>address</i> —Address of the name server. To configure multiple name servers, include multiple <i>address</i> options.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring a DNS Name Server for Resolving a Hostname into Addresses on page 123</a></li></ul>



## no-multicast-echo

```
Syntax  no-multicast-echo {
        arp {
            aging-timer minutes;
            gratuitous-arp-delay seconds;
            gratuitous-arp-on-ifup;
            interfaces {
                interface-name {
                    aging-timer minutes;
                }
            }
            passive-learning;
            purging;
        }
        host-name hostname;
        location {
            altitude feet;
            building name;
            country-code code;
            floor number;
            hcoord horizontal-coordinate;
            lata service-area;
            latitude degrees;
            longitude degrees;
            npa-nxx number;
            postal-code postal-code;
            rack number;
            vcoord vertical-coordinate;
        }
        license {
            autoupdate URL;
        }
        renew before-expiration (number | interval number)
    }
}
```

**Hierarchy Level** [edit system]

**Release Information** Statement introduced in Junos OS Release 8.1.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Disable the Routing Engine from responding to ICMP echo requests sent to multicast group addresses.

**Default** The Routing Engine responds to ICMP echo requests sent to multicast group addresses.

**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.



- |                              |   |
|------------------------------|---|
| <b>Related Documentation</b> | <ul style="list-style-type: none"> <li>Configuring the Junos OS to Disable the Routing Engine Response to Multicast Ping Packets</li> </ul> |
|------------------------------|---|

## no-ping-record-route

---

<b>Syntax</b>	no-ping-record-route;
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.4. Statement introduced in Junos OS Release 9.4 for EX Series switches. Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the Junos OS to disable the reporting of the IP address in ping responses.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><a href="#">Configuring the Junos OS to Disable the Reporting of IP Address and Timestamps in Ping Responses on page 126</a></li> </ul>

## no-ping-time-stamp

---

<b>Syntax</b>	no-ping-time-stamp;
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.4. Statement introduced in Junos OS Release 9.4 for EX Series switches. Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the Junos OS to disable the recording of timestamps in ping responses.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><a href="#">Configuring the Junos OS to Disable the Reporting of IP Address and Timestamps in Ping Responses on page 126</a></li> </ul>



## no-redirects (IPv4 Traffic)

---

<b>Syntax</b>	no-redirects;
<b>Hierarchy Level</b>	[edit system], [edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>family</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 11.1 for the QFX Series. Statement introduced in Junos OS Release 12.3 for EX Series switches.
<b>Description</b>	<p>Stop protocol redirect messages for IPv4 traffic from being sent on the entire switch or on an interface on the router or switch.</p> <p>To disable the sending of protocol redirect messages for the entire router or switch, include the <b>no-redirects</b> statement at the [edit system] hierarchy level.</p> <p>To disable the sending of protocol redirect messages on a specific interface, include the <b>no-redirects</b> statement at the [edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>family</i>] hierarchy level.</p>
<b>Default</b>	The router or switch sends redirect messages.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring the Junos OS to Disable Protocol Redirect Messages on the Router or Switch on page 126</a></li><li>• Understanding the Protocol Redirect Mechanism on EX Series Switches</li><li>• Configuring the Junos OS to Disable Sending Protocol Redirect Messages on EX-Series Switches (CLI Procedure)</li><li>• Junos® OS Network Interfaces</li></ul>



## ntp

<b>Syntax</b>	<pre>ntp {   authentication-key <i>number</i> type <i>type</i> value <i>password</i>;   boot-server <i>address</i>;   broadcast &lt;<i>address</i>&gt; &lt;<i>key key-number</i>&gt; &lt;<i>version value</i>&gt; &lt;<i>ttl value</i>&gt;;   broadcast-client;   multicast-client &lt;<i>address</i>&gt;;   peer <i>address</i> &lt;<i>key key-number</i>&gt; &lt;<i>version value</i>&gt; &lt;<i>prefer</i>&gt;;   server <i>address</i> &lt;<i>key key-number</i>&gt; &lt;<i>version value</i>&gt; &lt;<i>prefer</i>&gt;;   source-address <i>source-address</i>;   trusted-key [ <i>key-numbers</i> ]; }</pre>
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Configure Network Time Protocol (NTP) on the switch.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Synchronizing and Coordinating Time Distribution Using NTP on page 155</a></li> </ul>

## ntp (QFabric)

<b>Syntax</b>	<pre>ntp {   authentication-key <i>number</i> type <i>type</i> value <i>password</i>;   server <i>address</i> &lt;<i>key key-number</i>&gt; &lt;<i>version value</i>&gt; &lt;<i>prefer</i>&gt;; }</pre>
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Configure Network Time Protocol (NTP) on the switch.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring NTP Authentication Keys (QFabric System) on page 130</a></li> <li>• <a href="#">Configuring the NTP Time Server and Time Services (QFabric System) on page 133</a></li> <li>• <a href="#">authentication-key on page 208</a></li> <li>• <a href="#">server on page 253</a></li> </ul>



## optional

---

<b>Syntax</b>	optional;
<b>Hierarchy Level</b>	[edit system scripts commit file <i>filename</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Junos OS commit scripts, allow a commit operation to succeed even if the script specified in the <b>file</b> statement is missing from the <b>/var/db/scripts/commit</b> directory on the router.
<b>Required Privilege Level</b>	maintenance—To view this statement in the configuration. maintenance-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Controlling Execution of Commit Scripts During Commit Operations</li></ul>

## password (Login)

---

<b>Syntax</b>	<pre>password {   change-type (set-transitions   character-set);   format (md5   sha1   des);   maximum-length <i>length</i>;   minimum-changes <i>number</i>;   minimum-length <i>length</i>; }</pre>
<b>Hierarchy Level</b>	[edit system login]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure special requirements such as character length and encryption format for plain-text passwords. Newly created passwords must meet these requirements.  The remaining statements are explained separately.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li><a href="#">Special Requirements for Junos OS Plain-Text Passwords on page 1207</a></li></ul>



## peer

---

<b>Syntax</b>	<code>peer address &lt;key key-number&gt; &lt;version value&gt; &lt;prefer&gt;;</code>
<b>Hierarchy Level</b>	[edit system <a href="#">ntp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For NTP, configure the local router or switch to operate in symmetric active mode with the remote system at the specified address. In this mode, the local router or switch and the remote system can synchronize with each other. This configuration is useful in a network in which either the local router or switch or the remote system might be a better source of time.
<b>Options</b>	<p><b>address</b>—Address of the remote system. You must specify an address, not a hostname.</p> <p><b>key key-number</b>—(Optional) All packets sent to the address include authentication fields that are encrypted using the specified key number.</p> <p><b>Range:</b> Any unsigned 32-bit integer</p> <p><b>prefer</b>—(Optional) Mark the remote system as the preferred host, which means that if all other factors are equal, this remote system is chosen for synchronization among a set of correctly operating systems.</p> <p><b>version value</b>—(Optional) Specify the NTP version number to be used in outgoing NTP packets.</p> <p><b>Range:</b> 1 through 4</p> <p><b>Default:</b> 4</p>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the NTP Time Server and Time Services on page 131</a></li> </ul>



## permissions

---

<b>Syntax</b>	<pre>permissions {     storage;     storage-control; }</pre>
<b>Hierarchy Level</b>	[edit system login class]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the login access privileges to be provided on the switch.
<b>Options</b>	<i>permissions</i> —Privilege type.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Access Privilege Levels on page 1212</a></li><li>• <a href="#">Table 88 on page 1192</a></li><li>• <a href="#">user on page 276</a></li></ul>

## port (TACACS+ Server)

---

<b>Syntax</b>	<pre>port <i>port-number</i>;</pre>
<b>Hierarchy Level</b>	[edit system accounting destination tacplus server <i>server-address</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the port number on which to contact the TACACS+ server.
<b>Options</b>	<i>number</i> —Port number on which to contact the TACACS+ server. <b>Default:</b> 49
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring TACACS+ System Accounting on page 1233</a></li></ul>



## ports

<b>Syntax</b>	<pre> ports {   auxiliary {     disable;     insecure;     type <i>terminal-type</i>;   }   console {     disable;     insecure;     log-out-on-disconnect;     type <i>terminal-type</i>;   } } </pre>
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Configure the properties of the console and auxiliary ports. The ports are located on the craft interface.</p> <p>See the switch hardware documentation for port locations.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Console and Auxiliary Port Properties on page 5521</a></li> </ul>



## radius (System)

---

<b>Syntax</b>	<pre>radius {   server {     server-address {       accounting-port <i>port-number</i>;       secret <i>password</i>;       source-address <i>address</i>;       retry <i>number</i>;       timeout <i>seconds</i>;     }   } }</pre>
<b>Hierarchy Level</b>	[edit system accounting destination]
<b>Release Information</b>	Statement introduced in Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the RADIUS accounting server.
<b>Options</b>	<b><i>server-address</i></b> —Address of the RADIUS accounting server.  The remaining statements are explained separately.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Configuring RADIUS System Accounting</li></ul>



## refresh (Commit Scripts)

---

<b>Syntax</b>	<code>refresh;</code>
<b>Hierarchy Level</b>	<code>[edit system scripts commit],</code> <code>[edit system scripts file <i>filename</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Junos OS commit scripts, overwrite the local copy of all enabled commit scripts or a single enabled script located in the <code>/var/db/scripts/commit</code> directory with the copy located at the source URL, as specified in the <b>source</b> statement at the same hierarchy level.
<b>Required Privilege Level</b>	<code>maintenance</code> —To view this statement in the configuration. <code>maintenance-control</code> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">refresh-from on page 247</a></li> <li>• <a href="#">source on page 255</a></li> </ul>

## refresh-from (Commit Scripts)


---

<b>Syntax</b>	<code>refresh-from url;</code>
<b>Hierarchy Level</b>	<code>[edit system scripts commit],</code> <code>[edit system scripts commit file <i>filename</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Junos OS commit scripts, overwrite the local copy of all enabled commit scripts or a single enabled script located in the <code>/var/db/scripts/commit</code> directory with the copy located at a URL other than the URL specified in the <b>source</b> statement.
<b>Options</b>	<b>url</b> —The source specified as a Hypertext Transfer Protocol (HTTP) URL, FTP URL, or secure copy (scp)-style remote file specification.
<b>Required Privilege Level</b>	<code>maintenance</code> —To view this statement in the configuration. <code>maintenance-control</code> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">refresh on page 247</a></li> <li>• <a href="#">source on page 255</a></li> </ul>



## retry

---

<b>Syntax</b>	<code>retry number;</code>
<b>Hierarchy Level</b>	[edit system radius server <i>server-address</i> ], [edit system accounting destination radius server <i>server-address</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Number of times the router or switch is allowed to try to contact a RADIUS authentication or accounting server.
<b>Options</b>	<i>number</i> —Number of retries allowed for contacting a RADIUS server. <b>Range:</b> 1 through 10 <b>Default:</b> 3
<div> <b>NOTE:</b> The [edit system accounting] hierarchy is not available on QFabric systems.</div>	
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring RADIUS Authentication on page 1219</a></li><li>• <a href="#">Configuring RADIUS Accounting on page 1217</a></li><li>• <a href="#">timeout on page 269</a></li></ul>



## retry-options

<b>Syntax</b>	<pre> retry-options {   backoff-threshold <i>number</i>;   backoff-factor <i>seconds</i>;   maximum-time <i>seconds</i>;   minimum-time <i>seconds</i>;   tries-before-disconnect <i>number</i>; } </pre>
<b>Hierarchy Level</b>	[edit system login]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Maximum number of times a user can attempt to enter a password while logging in through SSH or Telnet before being disconnected.
<b>Options</b>	<p><b>backoff-threshold <i>number</i></b>—Threshold for the number of failed login attempts before the user experiences a delay when attempting to reenter a password. Use the <b>backoff-factor</b> option to specify the length of delay, in seconds.</p> <p><b>Range:</b> 1 through 3</p> <p><b>Default:</b> 2</p> <p><b>backoff-factor <i>seconds</i></b>—Length of delay after each failed login attempt. The length of delay increases by this value for each subsequent login attempt after the value specified in the <b>backoff-threshold</b> option.</p> <p><b>Range:</b> 5 through 10</p> <p><b>Default:</b> 5</p> <p><b>maximum-time <i>seconds</i></b>—Maximum length of time that the connection remains open for the user to enter a username and password to log in. If the user remains idle and does not enter a username and password within the configured <b>maximum-time</b>, the connection is closed.</p> <p><b>Range:</b> 20 through 300</p> <p><b>Default:</b> 120</p> <p><b>minimum-time <i>seconds</i></b>—Minimum length of time that the connection remains open while the user is attempting to enter a password to log in.</p> <p><b>Range:</b> 20 through 60</p> <p><b>Default:</b> 20</p> <p><b>tries-before-disconnect <i>number</i></b>—Maximum number of times a user is allowed to attempt to enter a password to log in through SSH or Telnet.</p> <p><b>Range:</b> 1 through 10</p> <p><b>Default:</b> 10</p>
<b>Required Privilege Level</b>	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>



- Related Documentation**
- [Limiting the Number of User Login Attempts for SSH and Telnet Sessions on page 1236](#)

---

## root-authentication

---

<b>Syntax</b>	<pre>root-authentication {     (encrypted-password "<i>password</i>"   load-key-password <i>URL</i>   plain-text-password);     ssh-dsa "<i>public-key</i>";     ssh-rsa "<i>public-key</i>"; }</pre>
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the authentication methods for the root-level user, whose username is <b>root</b> .
<b>Options</b>	<p><b>encrypted-password "<i>password</i>"</b>— Specify the MD5 or other encrypted authentication password. You can specify only one encrypted password.</p> <p>You cannot configure a blank password for the <b>encrypted-password</b> option using blank quotation marks (" "). You must configure a password of 1 through 128 characters and enclose the password in quotation marks.</p> <p><b>plain-text-password</b>—Plain-text password. The CLI prompts you for the password and then encrypts it. The CLI displays the encrypted version, and the software places the encrypted version in its user database. You can specify only one plain-text password.</p> <p><b>ssh-dsa "<i>public-key</i>"</b>—SSH version 2 authentication. Specify the DSA (SSH version 2) public key. You can specify one or more public keys.</p> <p><b>ssh-rsa "<i>public-key</i>"</b>—SSH version 1 authentication. Specify the RSA (SSH version 1 and SSH version 2) public key. You can specify one or more public keys.</p>
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring the Root Password on page 1222</a></li><li>• <a href="#">authentication on page 207</a></li></ul>



## saved-core-context

---

<b>Syntax</b>	(saved-core-context   no-saved-core-context);
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Configure whether the switch saves core files generated by internal Junos OS processes, along with contextual information (system log files and a copy of the current configuration):</p> <ul style="list-style-type: none"> <li>• <b>saved-core-context</b>—The switch saves each core file and its associated context in a compressed tar file named <code>/var/tmp/process-name.core.core-number.tgz</code>.</li> <li>• <b>no-saved-core-context</b>—The switch does not save core files and their associated context.</li> </ul>
<b>Default</b>	The switch saves core files.
<b>Required Privilege Level</b>	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Saving Core Files from Junos OS Processes</li> <li>• <a href="#">saved-core-files on page 251</a></li> </ul>

## saved-core-files

---

<b>Syntax</b>	saved-core-files <i>number</i> ;
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Save core files generated by internal Junos OS processes, but not the associated contextual information (configuration and system log files).
<b>Options</b>	<p><i>number</i>—Maximum number of core files to save.</p> <p><b>Range:</b> 1 through 10</p>
<b>Required Privilege Level</b>	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Saving Core Files from Junos OS Processes</li> <li>• <a href="#">saved-core-context on page 251</a></li> </ul>



## secret

---

<b>Syntax</b>	<code>secret <i>password</i>;</code>
<b>Hierarchy Level</b>	[edit system accounting destination radius server <i>server-address</i> ], [edit system accounting destination tacplus server <i>server-address</i> ], [edit system radius-server <i>server-address</i> ], [edit system tacplus-server <i>server-address</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the password to use with the RADIUS or TACACS+ server. The secret password used by the local switch must match that used by the server.
<b>Options</b>	<i>password</i> —Password to use; can include spaces included in quotation marks.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring RADIUS Accounting on page 1217</a></li><li>• <a href="#">Configuring RADIUS Authentication on page 1219</a></li><li>• <a href="#">Configuring TACACS+ Authentication on page 1231</a></li><li>• <a href="#">Configuring TACACS+ System Accounting on page 1233</a></li></ul>



## server (NTP)

---

<b>Syntax</b>	<code>server address &lt;key key-number&gt; &lt;version value&gt; &lt;prefer&gt;;</code>
<b>Hierarchy Level</b>	[edit system ntp]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For NTP, configure the switch to operate in client mode with the remote system at the specified server address. In this mode, the local switch can be synchronized with the remote system, but the remote system can never be synchronized with the local switch.
<b>Options</b>	<p><b>address</b>—Address of the remote system. You must specify an address, not a hostname.</p> <p><b>key key-number</b>—(Optional) Use the specified key number to encrypt authentication fields in all packets sent to the specified address.</p> <p><b>Range:</b> Any unsigned 32-bit integer</p> <p><b>prefer</b>—(Optional) Mark the remote system as preferred host, which means that if all other things are equal, this remote system is chosen for synchronization among a set of correctly operating systems.</p> <p><b>version value</b>—(Optional) Specify the version number to be used in outgoing NTP packets.</p> <p><b>Range:</b> 1 through 4</p> <p><b>Default:</b> 4</p>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">ntp on page 241</a></li> </ul>



## server (RADIUS Accounting)

---

<b>Syntax</b>	<pre>server {   server-address {     accounting-port port-number;     retry number     secret password;     source-address address;     timeout seconds;   } }</pre>
<b>Hierarchy Level</b>	[edit system accounting destination radius]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure RADIUS logging.  The remaining statements are explained separately.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring RADIUS System Accounting</a></li></ul>

## server (TACACS+ Accounting)

---

<b>Syntax</b>	<pre>server {   server-address {     port port-number;     secret password;     single-connection;     timeout seconds;   } }</pre>
<b>Hierarchy Level</b>	[edit system accounting destination tacplus]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure TACACS+ logging.  The remaining statements are explained separately.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring TACACS+ System Accounting on page 1233</a></li></ul>



## single-connection

---

<b>Syntax</b>	single-connection;
<b>Hierarchy Level</b>	[edit system accounting destination tacplus server <i>server-address</i> ], [edit system tacplus <i>server-address</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Optimize attempts to connect to a TACACS+ server. The software maintains one open TCP connection to the server for multiple requests rather than opening a connection for each connection attempt.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring TACACS+ Authentication on page 1231</a></li> <li>• <a href="#">Configuring TACACS+ System Accounting on page 1233</a></li> </ul>

## source (Commit Scripts)

---

<b>Syntax</b>	source <i>url</i> ;
<b>Hierarchy Level</b>	[edit system scripts commit file <i>filename</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series .
<b>Description</b>	For Junos OS commit scripts, specify the location of the source file for an enabled script located in the <code>/var/db/scripts/commit</code> directory. When you include the <b>refresh</b> statement at the same hierarchy level and commit the configuration, the local copy is overwritten by the version stored at the specified URL.
<b>Options</b>	<i>url</i> —The source specified as an HTTP URL, FTP URL, or scp-style remote file specification.
<b>Required Privilege Level</b>	maintenance—To view this statement in the configuration. maintenance-control—To add this statement to the configuration.



## source-address (NTP, RADIUS, System Logging, or TACACS+)

---

<b>Syntax</b>	<code>source-address <i>source-address</i>;</code>
<b>Hierarchy Level</b>	[edit system accounting destination radius server <i>server-address</i> ], [edit system accounting destination tacplus server <i>server-address</i> ], [edit system ntp], [edit system radius-server <i>server-address</i> ], [edit system syslog], [edit system tacplus-server <i>server-address</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify a source address for each configured TACACS+ server, RADIUS server, NTP server, or the source address to record in system log messages that are directed to a remote machine.
<b>Options</b>	<b><i>source-address</i></b> —Valid IP address configured on one of the switch interfaces. For system logging, the address is recorded as the message source in messages sent to the remote machines specified in all <b>host <i>hostname</i></b> statements at the [edit system syslog] hierarchy level.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring RADIUS Authentication on page 1219</a></li><li>• <a href="#">Synchronizing and Coordinating Time Distribution Using NTP on page 155</a></li><li>• <a href="#">Specifying an Alternative Source Address for System Log Messages</a></li></ul>

## source-port (Port Addresses)

---

<b>Syntax</b>	<code>source-port upper-limit &lt;<i>upper-limit</i>&gt;;</code>
<b>Hierarchy Level</b>	[edit system internet-options]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the range of port addresses.
<b>Options</b>	<b><i>upper-limit upper-limit</i></b> —(Optional) The range of port addresses and can be a value from 5000 through 65,355.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring the Junos OS to Extend the Default Port Address Range on page 128</a></li></ul>




## static-host-mapping

<b>Syntax</b>	<pre>static-host-mapping {     hostname {         alias [ <i>alias</i> ];         inet [ <i>address</i> ];         sysid <i>system-identifier</i>;     } }</pre>
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Map a hostname to one or more IP addresses and aliases, and configure an International Organization for Standardization (ISO) system identifier (system ID).
<b>Options</b>	<p><b>alias <i>alias</i></b>—Alias for the hostname.</p> <p><b>hostname</b>—Fully qualified hostname.</p> <p><b>inet <i>address</i></b>—IP address. You can specify one or more IP addresses for the host.</p> <p><b>sysid <i>system-identifier</i></b>—ISO system identifier (system ID). This is the 6-byte portion of the Intermediate System-to-Intermediate System (IS-IS) network service access point (NSAP). We recommend that you use the host's IP address represented in binary-coded decimal (BCD) format. For example, the IP address 208.197.169.18 is 2081.9716.9018 in BCD.</p>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the Hostname of the Router or Switch on page 125</a></li> </ul>



## structured-data

---

<b>Syntax</b>	structured-data { brief; }
<b>Hierarchy Level</b>	[edit system syslog file <i>filename</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Write system log messages to the log file in structured-data format, which complies with Internet draft draft-ietf-syslog-protocol-23, <i>The syslog Protocol</i> ( <a href="http://tools.ietf.org/html/draft-ietf-syslog-protocol-23">http://tools.ietf.org/html/draft-ietf-syslog-protocol-23</a> ).
<div> <b>NOTE:</b> When this statement is included, other statements that specify the format for messages written to the file are ignored (the <code>explicit-priority</code> statement at the [edit system syslog file <i>filename</i>] hierarchy level and the <code>time-format</code> statement at the [edit system syslog] hierarchy level).</div>	
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Logging Messages in Structured-Data Format</li><li><a href="#">explicit-priority on page 226</a></li><li><a href="#">time-format on page 268</a></li></ul>



## syslog (System)

```

Syntax  syslog {
        archive {
            (binary-data| no-binary-data);
            files number;
            size maximum-file-size;
            start-time "YYYY-MM-DD.hh:mm";
            transfer-interval minutes;
            (world-readable | no-world-readable);
        }
        console {
            facility severity;
        }
        file filename {
            facility severity;
            explicit-priority;
            match "regular-expression";
            archive {
                (binary-data| no-binary-data);
                files number;
                size maximum-file-size;
                start-time "YYYY-MM-DD.hh:mm";
                transfer-interval minutes;
                (world-readable | no-world-readable);
            }
            structured-data {
                brief;
            }
        }
        host (hostname | other-routing-engine | scc-master) {
            facility severity;
            explicit-priority;
            facility-override facility;
            log-prefix string;
            match "regular-expression";
            source-address source-address;
            structured-data {
                brief;
            }
            port port number;
        }
        log-rotate-frequency frequency;
        source-address source-address;
        time-format (millisecond | year | year millisecond);
        user (username | *) {
            facility severity;
            match "regular-expression";
        }
    }

```

**Hierarchy Level** [edit logical-systems *logical-system-name* system],  
[edit system]



<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.1 for the QFX Series. Support at the <b>[edit logical-systems <i>logical-system-name</i> system]</b> hierarchy level introduced in Junos OS Release 11.4.
<b>Description</b>	Configure the types of system log messages to log to files, a remote destination, user terminals, or the system console.  The remaining statements are explained separately.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Junos OS System Log Configuration Overview</li><li>• <i>Junos OS System Log Messages Reference</i></li><li>• <a href="#">Overview of Single-Chassis System Logging Configuration on page 5505</a></li></ul>



## system

```
Syntax  system {
    accounting {
        events [ login change-log interactive-commands ];
        destination {
            radius {
                server {
                    server-address {
                        accounting-port port-number;
                        retry number;
                        secret password;
                        source-address address;
                        timeout seconds;
                    }
                }
            }
        }
        tacplus {
            server {
                server-address {
                    port port-number;
                    secret password;
                    single-connection;
                    timeout seconds;
                }
            }
        }
    }
    archival {
        configuration {
            archive-sites {
                ftp://<username>:<password>@<host>:<port>/<url-path>;
                ftp://<username>:<password>@<host>:<port>/<url-path>;
            }
            transfer-interval interval;
            transfer-on-commit;
        }
    }
    arp {
        aging-timer minutes;
        interfaces;
    }
    authentication-order [ authentication-methods ];
    (compress-configuration-files | no-compress-configuration-files);
    default-address-selection;
    domain-name domain-name;
    domain-search [ domain-list ];
    host-name hostname;
    internet-options {
        icmpv4-rate-limit bucket-size bucket-size packet-rate packet-rate;
        source-port upper-limit <upper-limit>;
    }
    location {
```



```
altitude feet;  
building name;  
country-code code;  
floor number;  
hcoord horizontal-coordinate;  
lata service-area;  
latitude degrees;  
longitude degrees;  
npa-nxx number;  
postal-code postal-code;  
rack number;  
vcoord vertical-coordinate;  
}  
login {  
  announcement text;  
  class class-name {  
    access-end;  
    access-start;  
    allow-configuration "regular-expression";  
    allowed-days "regular-expression";  
    deny-commands "regular-expression";  
    deny-configuration "regular-expression";  
    idle-timeout minutes;  
    login-tip;  
    permissions [ permissions ];  
  }  
  message text;  
  password {  
    change-type (set-transitions | character-set);  
    format (md5 | sha1 | des);  
    maximum-length length;  
    minimum-changes number;  
    minimum-length length;  
  }  
  retry-options {  
    backoff-factor seconds;  
    backoff-threshold number;  
    minimum-time seconds;  
    tries-before-disconnect number;  
  }  
  user username {  
    authentication {  
      (encrypted-password "password" | plain-text-password);  
      load-key-file URL;  
      remote-debug-permission (qfabric-admin | qfabric-operator | qfabric-user);  
      ssh-rsa "public-key";  
      ssh-dsa "public-key";  
    }  
    uid uid-value;  
    class class-name;  
    full-name complete-name;  
  }  
}  
name-server {  
  address;  
}
```



```

no-multicast-echo;
no-redirects;
no-ping-record-route;
no-ping-time-stamp;
ntp {
    authentication-key number type type value password;
    serveraddress <key key-number> <version value> <prefer>;
}
ports {
    auxiliary {
        disable;
        insecure;
        type terminal-type;
    }
    console {
        disable;
        insecure;
        log-out-on-disconnect;
        type terminal-type;
    }
}
radius-server server-address {
    accounting-port port-number;
    port number;
    retry number;
    secret password;
    source-address source-address;
    timeout seconds;
}
radius-options {
    password-protocol mschap-v2;
}
attributes {
    nas-ip-address ip-address;
}
root-authentication {
    (encrypted-password "password" | plain-text-password);
    ssh-rsa "public-key";
    ssh-dsa "public-key";
}
(saved-core-context | no-saved-core-context);
saved-core-files saved-core-files;
services {
    finger {
        connection-limit limit;
        rate-limit limit;
    }
    flow-tap-dtcp {
        ssh {
            connection-limit limit;
            rate-limit limit;
        }
    }
}
ftp {
    connection-limit limit;
    rate-limit limit;
}

```



```
}
service-deployment {
  servers server-address {
    port port-number;
  }
  source-address source-address;
}
ssh {
  root-login (allow | deny | deny-password);
  protocol-version [v1 v2];
  connection-limit limit;
  rate-limit limit;
}
telnet {
  connection-limit limit;
  rate-limit limit;
}
web-management {
  http {
    interfaces [ interface-names ];
    port port;
  }
  https {
    interfaces [ interface-names ];
    local-certificate name;
    port port;
  }
  session {
    idle-timeout [ minutes ];
    session-limit [ session-limit ];
  }
}
xnm-clear-text {
  connection-limit limit;
  rate-limit limit;
}
xnm-ssl {
  connection-limit limit;
  local-certificate name;
  rate-limit limit;
}
}
static-host-mapping {
  hostname {
    alias [ alias ];
    inet [ address ];
    sysid system-identifier;
  }
}
syslog {
  archive {
    files number;
    size maximum-file-size;
    start-time "YYYY-MM-DD.hh:mm";
    transfer-interval minutes;
    (world-readable | no-world-readable);
  }
}
```



```

}
console {
    facility severity;
}
file filename {
    archive {
        files number;
        size maximum-file-size;
        start-time "YYYY-MM-DD.hh:mm";
        transfer-interval minutes;
        (world-readable | no-world-readable);
    }
    explicit-priority;
    facility severity;
    match "regular-expression";
    structured-data {
        brief;
    }
}
host (hostname | other-routing-engine | scc-master) {
    explicit-priority;
    facility-override facility;
    facility severity;
    log-prefix string;
    match "regular-expression";
}
source-address source-address;
time-format (millisecond | year | year millisecond);
user (username | *) {
    facility severity;
    match "regular-expression";
}
}
tacplus-options {
    service-name service-name;
    (no-cmd-attribute-value | exclude-cmd-attribute);
}
tacplus-server server-address {
    port
    secret password;
    single-connection;
    source-address source-address;
    timeout seconds;
}
time-zone (GMThour-offset | time-zone);
}
tracing {
    destination-override {
        syslog host;
    }
}
use-imported-time-zones;
}

```

Hierarchy Level [\[edit\]](#)



<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure system management properties.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.

---

## tacplus

---

**Syntax**

```
tacplus {  
  server {  
    server-address {  
      port port-number;  
      secret password;  
      single-connection;  
      timeout seconds;  
    }  
  }  
}
```

**Hierarchy Level** [edit system accounting destination]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure TACACS+.

**Options** *server-address*—Address of the TACACS+ authentication server.  
  
The remaining statements are explained separately.

**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring TACACS+ System Accounting on page 1233](#)



---

## tacplus-server


---

<b>Syntax</b>	<pre>tacplus-server <i>server-address</i> {     port     secret <i>password</i>;     single-connection;     source-address <i>source-address</i>;     timeout <i>seconds</i>; }</pre>
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the TACACS+ server.
<b>Options</b>	<p><b><i>server-address</i></b>—Address of the TACACS+ authentication server.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring TACACS+ Authentication on page 1231</a></li></ul>



## time-format

---

<b>Syntax</b>	time-format (year   millisecond   year millisecond);
<b>Hierarchy Level</b>	[edit system syslog]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Include the year, the millisecond, or both, in the timestamp on every standard-format system log message. The additional information is included for messages directed to each destination configured by a <b>file</b> , <b>console</b> , or <b>user</b> statement at the [edit system syslog] hierarchy level, but not to destinations configured by a <b>host</b> statement.
<b>Default</b>	The timestamp specifies the month, date, hour, minute, and second when the message was logged—for example, <b>Aug 21 12:36:30</b> .
<div> <b>NOTE:</b> When the structured-data statement is included at the [edit system syslog file <i>filename</i>] hierarchy level, this statement is ignored for the file.</div>	
<b>Options</b>	<b>millisecond</b> —Include the millisecond in the timestamp. <b>year</b> —Include the year in the timestamp.
<b>Required Privilege Level</b>	<b>system</b> —To view this statement in the configuration. <b>system-control</b> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Including the Year or Millisecond in Timestamps on page 142</a></li><li>• <a href="#">structured-data on page 258</a></li></ul>



## timeout

---

<b>Syntax</b>	<code>timeout seconds;</code>
<b>Hierarchy Level</b>	[edit system radius-server <i>server-address</i> ], [edit system tacplus-server <i>server-address</i> ], [edit system accounting destination radius server <i>server-address</i> ], [edit system accounting destination tacplus server <i>server-address</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the length of time that the local router or switch waits to receive a response from a RADIUS or TACACS+ server.
<b>Options</b>	<b>seconds</b> —Length of time to wait. <b>Range:</b> 1 through 90 seconds <b>Default:</b> 3 seconds
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring RADIUS Accounting on page 1217</a></li> <li>• <a href="#">Configuring TACACS+ System Accounting on page 1233</a></li> <li>• <a href="#">retry on page 248</a></li> </ul>



## time-zone

<b>Syntax</b>	<code>time-zone (GMT <i>hour-offset</i>   <i>time-zone</i>);</code>
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Set the local time zone. To have the time zone change take effect for all processes running on the switch, you must reboot the switch.
<b>Default</b>	UTC
<b>Options</b>	<p><b>GMT <i>hour-offset</i></b>—Set the time zone relative to UTC time.</p> <p><b>Range:</b> -14 through +12</p> <p><b>Default:</b> 0</p> <p><b><i>time-zone</i></b>—Specify the time zone as <b>UTC</b>, which is the default time zone, or as a string such as PDT (Pacific Daylight Time), or use one of the following continents and major cities:</p> <p>Africa/Abidjan, Africa/Accra, Africa/Addis_Ababa, Africa/Algiers, Africa/Asmera, Africa/Bamako, Africa/Bangui, Africa/Banjul, Africa/Bissau, Africa/Blantyre, Africa/Brazzaville, Africa/Bujumbura, Africa/Cairo, Africa/Casablanca, Africa/Ceuta, Africa/Conakry, Africa/Dakar, Africa/Dar_es_Salaam, Africa/Djibouti, Africa/Douala, Africa/El_Aaiun, Africa/Freetown, Africa/Gaborone, Africa/Harare, Africa/Johannesburg, Africa/Kampala, Africa/Khartoum, Africa/Kigali, Africa/Kinshasa, Africa/Lagos, Africa/Libreville, Africa/Lome, Africa/Luanda, Africa/Lubumbashi, Africa/Lusaka, Africa/Malabo, Africa/Maputo, Africa/Maseru, Africa/Mbabane, Africa/Mogadishu, Africa/Monrovia, Africa/Nairobi, Africa/Ndjamena, Africa/Niamey, Africa/Nouakchott, Africa/Ouagadougou, Africa/Porto-Novo, Africa/Sao_Tome, Africa/Timbuktu, Africa/Tripoli, Africa/Tunis, Africa/Windhoek</p> <p>America/Adak, America/Anchorage, America/Anguilla, America/Antigua, America/Aruba, America/Asuncion, America/Barbados, America/Belize, America/Bogota, America/Boise, America/Buenos_Aires, America/Caracas, America/Catamarca, America/Cayenne, America/Cayman, America/Chicago, America/Cordoba, America/Costa_Rica, America/Cuiaba, America/Curacao, America/Dawson, America/Dawson_Creek, America/Denver, America/Detroit, America/Dominica, America/Edmonton, America/El_Salvador, America/Ensenada, America/Fortaleza, America/Glace_Bay, America/Godthab, America/Goose_Bay, America/Grand_Turk, America/Grenada, America/Guadeloupe, America/Guatemala, America/Guayaquil, America/Guyana, America/Halifax, America/Havana, America/Indiana/Knox, America/Indiana/Marengo, America/Indiana/Vevay, America/Indianapolis, America/Inuvik, America/Iqaluit, America/Jamaica, America/Jujuy, America/Juneau, America/La_Paz, America/Lima, America/Los_Angeles, America/Louisville, America/Maceio, America/Managua, America/Manaus, America/Martinique, America/Mazatlan, America/Mendoza, America/Menominee, America/Mexico_City, America/Miquelon, America/Montevideo, America/Montreal, America/Montserrat, America/Nassau, America/New_York, America/Nipigon, America/Nome, America/Noronha, America/Panama, America/Pangnirtung, America/Paramaribo, America/Phoenix, America/Port-au-Prince, America/Port_of_Spain, America/Porto_Acre, America/Puerto_Rico, America/Rainy_River, America/Rankin_Inlet, America/Regina, America/Rosario, America/Santiago,</p>



America/Santo\_Domingo, America/Sao\_Paulo, America/Scoresbysund,  
 America/Shiprock, America/St\_Johns, America/St\_Kitts, America/St\_Lucia,  
 America/St\_Thomas, America/St\_Vincent, America/Swift\_Current, America/Tegucigalpa,  
 America/Thule, America/Thunder\_Bay, America/Tijuana, America/Tortola,  
 America/Vancouver, America/Whitehorse, America/Winnipeg, America/Yakutat,  
 America/Yellowknife  
 Antarctica/Casey, Antarctica/DumontDURville, Antarctica/Mawson, Antarctica/McMurdo,  
 Antarctica/Palmer, Antarctica/South\_Pole  
 Arctic/Longyearbyen  
 Asia/Aden, Asia/Alma-Ata, Asia/Amman, Asia/Anadyr, Asia/Aqtau, Asia/Aqtobe,  
 Asia/Ashkhabad, Asia/Baghdad, Asia/Bahrain, Asia/Baku, Asia/Bangkok, Asia/Beirut,  
 Asia/Bishkek, Asia/Brunei, Asia/Calcutta, Asia/Chungking, Asia/Colombo, Asia/Dacca,  
 Asia/Damascus, Asia/Dubai, Asia/Dushanbe, Asia/Gaza, Asia/Harbin, Asia/Hong\_Kong,  
 Asia/Irkutsk, Asia/Ishigaki, Asia/Jakarta, Asia/Jayapura, Asia/Jerusalem, Asia/Kabul,  
 Asia/Kamchatka, Asia/Karachi, Asia/Kashgar, Asia/Katmandu, Asia/Krasnoyarsk,  
 Asia/Kuala\_Lumpur, Asia/Kuching, Asia/Kuwait, Asia/Macao, Asia/Magadan, Asia/Manila,  
 Asia/Muscat, Asia/Nicosia, Asia/Novosibirsk, Asia/Omsk, Asia/Phnom\_Penh,  
 Asia/Pyongyang, Asia/Qatar, Asia/Rangoon, Asia/Riyadh, Asia/Saigon, Asia/Seoul,  
 Asia/Shanghai, Asia/Singapore, Asia/Taipei, Asia/Tashkent, Asia/Tbilisi, Asia/Tehran,  
 Asia/Thimbu, Asia/Tokyo, Asia/Ujung\_Pandang, Asia/Ulan\_Bator, Asia/Urumqi,  
 Asia/Vientiane, Asia/Vladivostok, Asia/Yakutsk, Asia/Yekaterinburg, Asia/Yerevan  
 Atlantic/Azores, Atlantic/Bermuda, Atlantic/Canary, Atlantic/Cape\_Verde, Atlantic/Faeroe,  
 Atlantic/Jan\_Mayen, Atlantic/Madeira, Atlantic/Reykjavik, Atlantic/South\_Georgia,  
 Atlantic/St\_Helena, Atlantic/Stanley  
 Australia/Adelaide, Australia/Brisbane, Australia/Broken\_Hill, Australia/Darwin,  
 Australia/Hobart, Australia/Lindeman, Australia/Lord\_Howe, Australia/Melbourne,  
 Australia/Perth, Australia/Sydney  
 Europe/Amsterdam, Europe/Andorra, Europe/Athens, Europe/Belfast, Europe/Belgrade,  
 Europe/Berlin, Europe/Bratislava, Europe/Brussels, Europe/Bucharest, Europe/Budapest,  
 Europe/Chisinau, Europe/Copenhagen, Europe/Dublin, Europe/Gibraltar, Europe/Helsinki,  
 Europe/Istanbul, Europe/Kaliningrad, Europe/Kiev, Europe/Lisbon, Europe/Ljubljana,  
 Europe/London, Europe/Luxembourg, Europe/Madrid, Europe/Malta, Europe/Minsk,  
 Europe/Monaco, Europe/Moscow, Europe/Oslo, Europe/Paris, Europe/Prague,  
 Europe/Riga, Europe/Rome, Europe/Samara, Europe/San\_Marino, Europe/Sarajevo,  
 Europe/Simferopol, Europe/Skopje, Europe/Sofia, Europe/Stockholm, Europe/Tallinn,  
 Europe/Tirane, Europe/Vaduz, Europe/Vatican, Europe/Vienna, Europe/Vilnius,  
 Europe/Warsaw, Europe/Zagreb, Europe/Zurich  
 Indian/Antananarivo, Indian/Chagos, Indian/Christmas, Indian/Cocos, Indian/Comoro,  
 Indian/Kerguelen, Indian/Mahe, Indian/Maldives, Indian/Mauritius, Indian/Mayotte,  
 Indian/Reunion  
 Pacific/Apia, Pacific/Auckland, Pacific/Chatham, Pacific/Easter, Pacific/Efate,  
 Pacific/Enderbury, Pacific/Fakaofo, Pacific/Fiji, Pacific/Funafuti, Pacific/Galapagos,  
 Pacific/Gambier, Pacific/Guadalcanal, Pacific/Guam, Pacific/Honolulu, Pacific/Johnston,  
 Pacific/Kiritimati, Pacific/Kosrae, Pacific/Kwajalein, Pacific/Majuro, Pacific/Marquesas,  
 Pacific/Midway, Pacific/Nauru, Pacific/Niue, Pacific/Norfolk, Pacific/Noumea,  
 Pacific/Pago\_Pago, Pacific/Palau, Pacific/Pitcairn, Pacific/Ponape, Pacific/Port\_Moresby,  
 Pacific/Rarotonga, Pacific/Saipan, Pacific/Tahiti, Pacific/Tarawa, Pacific/Tongatapu,  
 Pacific/Truk, Pacific/Wake, Pacific/Wallis, Pacific/Yap

**Required Privilege** system—To view this statement in the configuration.  
**Level** system-control—To add this statement to the configuration.

**Related Documentation** • [Modifying the Default Time Zone for a Router or Switch Running Junos OS on page 147](#)



## traceoptions (Commit Scripts)

---

Syntax	<pre>traceoptions {     file &lt;filename&gt; &lt;files number&gt; &lt;size size&gt; &lt;world-readable   no-world-readable&gt;;     flag flag;     no-remote-trace; }</pre>
Hierarchy Level	[edit system scripts commit],
Release Information	Statement introduced in Junos OS Release 11.1 for the QFX Series.
Description	Define tracing operations for commit or op scripts.
Default	If you do not include this statement, no script-specific tracing operations are performed.
Options	<p><b>filename</b>—Name of the file to receive the output of the tracing operation. All files are placed in the directory <code>/var/log</code>. By default, commit script process tracing output is placed in the file <code>cscript.log</code> and op script process tracing is placed in the file <code>op-script.log</code>. If you include the <b>file</b> statement, you must specify a filename. To retain the default, you can specify <code>cscript.log</code> or <code>op-script.log</code> as the filename.</p> <p><b>files number</b>—(Optional) Maximum number of trace files. When a trace file named <i>trace-file</i> reaches its maximum size, it is renamed and compressed to <i>trace-file.0.gz</i>. When <i>trace-file</i> again reaches its maximum size, <i>trace-file.0.gz</i> is renamed <i>trace-file.1.gz</i> and <i>trace-file</i> is renamed and compressed to <i>trace-file.0.gz</i>. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.</p> <p>If you specify a maximum number of files, you also must specify a maximum file size with the <b>size</b> option and a filename.</p> <p><b>Range:</b> 2 through 1000</p> <p><b>Default:</b> 10 files</p> <p><b>flag</b>—Tracing operation to perform. To specify more than one tracing operation, include multiple <b>flag</b> statements. You can include the following flags:</p> <ul style="list-style-type: none"><li>• <b>all</b>—Log all operations</li><li>• <b>events</b>—Log important events</li><li>• <b>input</b>—Log script input data</li><li>• <b>offline</b>—Generate data for offline development</li><li>• <b>output</b>—Log script output data</li><li>• <b>rpc</b>—Log script RPCs</li><li>• <b>xslt</b>—Log the XSLT library</li></ul> <p><b>no-world-readable</b>—Restrict file access to owner. This is the default.</p>



**size** *size*—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches this size, it is renamed and compressed to **trace-file.0.gz**. When **trace-file** again reaches its maximum size, **trace-file.0.gz** is renamed **trace-file.1.gz** and **trace-file** is renamed and compressed to **trace-file.0.gz**. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

If you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option and a filename.

**Syntax:** **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

**Range:** 10 KB through 1 GB

**Default:** 128 KB


**world-readable**—Enable unrestricted file access.

<b>Required Privilege Level</b>	maintenance—To view this statement in the configuration. maintenance-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Tracing Commit Script Processing</li> </ul>



## tracing

---

<b>Syntax</b>	<pre>tracing {     destination-override syslog host <i>ip-address</i>; }</pre>
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the switch to enable remote tracing to a specified host IP address.
	<div> <b>NOTE:</b> The <code>tracing</code> statement is not supported on the QFX3000 QFabric system.</div>
	<p>The following processes are supported:</p> <ul style="list-style-type: none"><li>• <b>chassisd</b>—Chassis-control process</li><li>• <b>eventd</b>—Event-processing process</li><li>• <b>cosd</b>—Class-of-service process</li></ul> <p>If you enabled remote tracing but wish to disable it for specific processes on the switch, use the <b>no-remote-trace</b> statement at the [edit system <i>process-name</i> traceoptions] hierarchy level.</p>
<b>Default</b>	Remote tracing is disabled by default.
<b>Options</b>	<b>destination-override syslog host <i>ip-address</i></b> —Overrides the global configuration for system tracing and has no effect if the <b>tracing</b> statement is not configured.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding Tracing and Logging Operations on page 5433</a></li><li>• <a href="#">destination-override on page 224</a></li></ul>



## trusted-key

---

<b>Syntax</b>	<code>trusted-key [ <i>key-numbers</i> ];</code>
<b>Hierarchy Level</b>	[edit system <a href="#">ntp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For NTP, configure the keys to use when you configure the switch to synchronize its time with other systems on the network.
<b>Options</b>	<i>key-numbers</i> —One or more key numbers. Each key can be any 32-bit unsigned integer except 0.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring NTP Authentication Keys on page 129</a></li> <li>• authentication-key</li> <li>• <a href="#">server on page 253</a></li> </ul>

## uid

---

<b>Syntax</b>	<code>uid <i>uid-value</i>;</code>
<b>Hierarchy Level</b>	[edit system login user]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure a user identifier for a login account.
<b>Options</b>	<i>uid-value</i> —Number associated with the login account. This value must be unique on the router or switch. <b>Range:</b> 100 through 64000
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Junos OS User Accounts on page 1213</a></li> </ul>



## use-imported-time-zones

---

<b>Syntax</b>	use-imported-time-zones;
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure a custom time zone from a locally generated time zone database.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Setting a Custom Time Zone on Routers or Switches Running Junos OS on page 150</a></li></ul>

## user (Access)

---

<b>Syntax</b>	<pre>user username {   authentication {     (encrypted-password "password"   plain-text-password);     load-key-file URL;     remote-debug-permission (qfabric-admin   qfabric-operator   qfabric-user);     ssh-dsa "public-key" &lt;from hostname&gt;;     ssh-rsa "public-key" &lt;from hostname&gt;;   }   class class-name;   full-name "complete-name";   uid uid-value; }</pre>
<b>Hierarchy Level</b>	[edit system login]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure access permission for individual users.
<b>Options</b>	The remaining statements are explained separately.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Junos OS User Accounts on page 1213</a></li><li>• <a href="#">class on page 215</a></li></ul>



## CHAPTER 6

# Administration

- [Routine Monitoring on page 277](#)
- [Operational Commands on page 280](#)

### Routine Monitoring

---

- [Monitoring System Process Information on page 277](#)
- [Monitoring System Properties on page 278](#)
- [Monitoring Interface Status and Traffic on page 279](#)
- [Other Tools to Configure and Monitor Devices Running Junos OS on page 280](#)

### Monitoring System Process Information

**Purpose** View the processes running on the QFX Series.

**Action** To view the software processes running on the QFX Series:

[edit system]

user@switch> [show system processes](#)

**Meaning** [Table 32 on page 277](#) summarizes the output fields in the system process information display.

The display includes the total CPU load and total memory utilization.

**Table 32: Summary of System Process Information Output Fields**

Field	Values
PID	Identifier of the process.
Name	Owner of the process.
State	Current state of the process.
CPU Load	Percentage of the CPU that is being used by the process.
Memory Utilization	Amount of memory that is being used by the process.



Table 32: Summary of System Process Information Output Fields (*continued*)

Field	Values
Start Time	Time of day when the process started.

- Related Documentation**
- [Monitoring System Properties on page 278](#)
  - [show system uptime on page 1017](#)

## Monitoring System Properties

**Purpose** View system properties such as the name and IP address of a QFX Series product and resource usage.

**Action** To monitor system properties in the CLI, enter the following commands:

- [show system uptime](#)
- [show system users](#)
- [show system storage](#)

**Meaning** [Table 33 on page 278](#) summarizes key output fields in the system properties display.

Table 33: Summary of Key System Properties Output Fields

Field	Values	Additional Information
<b>General Information</b>		
Serial Number	Serial number for a QFX Series product.	
Junos OS Version	Version of Junos OS active on the switch, including whether the software is for domestic or export use.	Export software is for use outside the USA and Canada.
Hostname	Name of the QFX Series product.	
IP Address	IP address of the QFX Series product.	
Loopback Address	Loopback address.	
Domain Name Server	Address of the domain name server.	
Time Zone	Time zone on the QFX Series product.	
<b>Time</b>		
Current Time	Current system time, in Coordinated Universal Time (UTC).	



Table 33: Summary of Key System Properties Output Fields (*continued*)

Field	Values	Additional Information
System Booted Time	Date and time when the QFX Series product was last booted and how long it has been running.	
Protocol Started Time	Date and time when the protocols were last started and how long they have been running.	
Last Configured Time	Date and time when a configuration was last committed. This field also shows the name of the user who issued the last <b>commit</b> command.	
Load Average	CPU load average for 1, 5, and 15 minutes.	
<b>Storage Media</b>		
Internal Flash Memory	Usage details of internal flash memory.	
External Flash Memory	Usage details of external USB flash memory.	
<b>Logged in Users Details</b>		
User	Username of any user logged in to the switch.	
Terminal	Terminal through which the user is logged in.	
From	System from which the user has logged in. A hyphen indicates that the user is logged in through the console.	
Login Time	Time when the user logged in.	This is the <b>user@switch</b> field in <b>show system users</b> command output.
Idle Time	How long the user has been idle.	

- Related Documentation**
- [Monitoring System Process Information on page 277](#)
  - [show system processes on page 931](#)

## Monitoring Interface Status and Traffic

**Purpose** View interface status to monitor interface bandwidth utilization and traffic statistics on the QFX Series product.

- Action**
- To view interface status for all the interfaces, enter **show interfaces xe**.
  - To view status and statistics for a specific interface, enter **show interfaces xe interface-name**.



- To view status and traffic statistics for all interfaces, enter either [show interfaces xe detail](#) or [show interfaces xe extensive](#).

**Meaning** For details about output from the CLI commands, see [show interfaces xe](#).

## Other Tools to Configure and Monitor Devices Running Junos OS

Apart from the command-line interface, Junos OS also supports the following applications, scripts, and utilities that enable you to configure and monitor devices running Junos OS:

- Junos XML Management Protocol Application Programming Interface (API)—Application programmers can use the Junos XML Management Protocol API to monitor and configure Juniper Networks QFX Series products. Juniper Networks provides a Perl module with the API to help you more quickly and easily develop custom Perl scripts for configuring and monitoring the QFX Series.
- NETCONF Application Programming Interface (API)—Application programmers can also use the NETCONF API to monitor and configure Juniper Networks QFX Series products.
- Junos OS commit scripts—You can define scripts to enforce custom configuration tasks, enforce consistency, prevent common mistakes, and more. Every time you commit a new candidate configuration, the active commit scripts are called to inspect the new candidate configuration. If a configuration violates your custom rules, the script can instruct the Junos OS to perform various actions, including making changes to the configuration and generating custom, warning, and system log messages.
- Junos OS Op scripts—You can add your own commands to the operation-mode CLI. You can use these scripts to automate troubleshooting of known network problems and correct them.
- Junos OS event scripts—You can use event scripts to diagnose and fix issues, monitor the overall status of the system, and examine errors periodically. Event scripts are similar to op scripts except that certain events on the switch will trigger these scripts.
- Junos Space—The Junos Space application design allows multiple users concurrent access to its user interface. It also includes applications for network infrastructure automation.

### Related Documentation

- [CLI User Interface Overview on page 46](#)
- [QFX Series Software Features Overview on page 15](#)
- *NETCONF XML Management Protocol Guide*
- [Junos Space Overview](#)
- [Understanding Device and Network Management Features on page 5429](#)

---

## Operational Commands



## commit

<b>Syntax</b>	<code>commit &lt;&lt;at &lt;"string"&gt;&gt; &lt;and-quit&gt; &lt;check&gt; &lt;comment &lt;"comment-string"&gt;&gt; &lt;confirmed&gt; &lt;display detail&gt; &lt;fast-synchronize&gt; &lt;minutes&gt; &lt;synchronize&gt;&lt;force&gt;&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 11.1 for the QFX Series. Option <b>fast-synchronize</b> added in Junos OS Release 12.2.
<b>Description</b>	Commit the set of changes to the database and cause the changes to take operational effect.
<b>Options</b>	<p><b>at &lt;"string"&gt;</b>—(Optional) Save software configuration changes and activate the configuration at a future time, or upon reboot.</p> <p><b>string</b> is <b>reboot</b> or the future time to activate the configuration changes. Enclose the <b>string</b> value (including <b>reboot</b>) in quotation marks (" "). You can specify time in two formats:</p> <ul style="list-style-type: none"> <li>A time value in the form <b>hh:mm[:ss]</b> (hours, minutes, and optionally seconds)—Commit the configuration at the specified time, which must be in the future but before 11:59:59 PM on the day the <b>commit at</b> configuration command is issued. Use 24-hour time for the <b>hh</b> value; for example, <b>04:30:00</b> is 4:30:00 AM, and <b>20:00</b> is 8:00 PM. The time is interpreted with respect to the clock and time zone settings on the router.</li> <li>A date and time value in the form <b>yyyy-mm-dd hh:mm[:ss]</b> (year, month, date, hours, minutes, and, optionally, seconds)—Commit the configuration at the specified day and time, which must be after the <b>commit at</b> command is issued. Use 24-hour time for the <b>hh</b> value. For example, <b>2003-08-21 12:30:00</b> is 12:30 PM on August 21, 2003. The time is interpreted with respect to the clock and time zone settings on the router.</li> </ul> <p>For example, <b>commit at "18:00:00"</b>. For date and time, include both values in the same set of quotation marks. For example, <b>commit at "2005-03-10 14:00:00"</b>.</p> <p>A <i>commit check</i> is performed when you issue the <b>commit at</b> configuration mode command. If the result of the check is successful, then the current user is logged out of configuration mode, and the configuration data is left in a read-only state. No other commit can be performed until the scheduled commit is completed.</p>





**NOTE:** If Junos OS fails before the configuration changes become active, all configuration changes are lost.

You cannot enter the **commit at configuration** command when there is a pending reboot.

You cannot enter the **request system reboot** command once you schedule a commit operation for a specific time in the future.

You cannot commit a configuration when a scheduled commit is pending. For information about how to use the **clear** command to cancel a scheduled configuration, see the Junos OS Operational Mode Commands.

**and-quit**—(Optional) Commit the configuration and, if the configuration contains no errors and the commit succeeds, exit from configuration mode.

**check**—(Optional) Verify the syntax of the configuration, but do not activate it.

**comment** <"*comment-string*">—(Optional) Add a comment that describes the committed configuration. The comment can be as long as 512 bytes and must be typed on a single line. You cannot include a comment with the **commit check** command. Enclose *comment-string* in quotation marks (" "). For example, **commit comment "Includes changes recommended by SW Lab"**.

**confirmed** <*minutes*>—(Optional) Require that the commit be confirmed within the specified amount of time. To confirm a commit, enter either a **commit** or **commit check** command. If the commit is not confirmed within the time limit, the configuration rolls back automatically to the precommit configuration and a broadcast message is sent to all logged-in users. To show when a rollback is scheduled, enter the **show system commit** command. The allowed range is 1 through 65,535 minutes, and the default is 10 minutes.

In Junos OS Release 11.4 and later, you can also use the **commit confirmed** command in the **[edit private]** configuration mode.

**display detail**—(Optional) Monitors the commit process.



**NOTE:** In Junos OS Release 10.4 and later, if the number of commit details or messages exceeds a page when used with the **| display detail** pipe option, the **more** pagination option on the screen is no longer available. Instead, the messages roll up on the screen by default, just like using the **commit** command with the **| no more** pipe option.

**fast-synchronize**—(Optional) Configure the commits to run in parallel on both the master and backup Routing Engines to reduce the time taken for commit synchronization.

**synchronize** <*force*>—(Optional) If your router has two Routing Engines, you can manually direct one Routing Engine to synchronize its configuration with the other by issuing the



**commit synchronize** command. The Routing Engine on which you execute this command (request Routing Engine) copies and loads its candidate configuration to the other (responding Routing Engine). Both Routing Engines then perform a syntax check on the candidate configuration file being committed. If no errors are found, the configuration is activated and becomes the current operational configuration on both Routing Engines. The **commit synchronize** command does not work if the responding Routing Engine has uncommitted configuration changes. However, you can enforce commit synchronization on the Routing Engines by using the **force** option. When you issue the **commit synchronize** command with the **force** option from one Routing Engine, the configuration sessions on the other Routing Engine is terminated and its configuration synchronized with that on the Routing Engine from which you issued the command.



**NOTE:** When you issue the **commit synchronize** command, you must use the **apply-groups re0** and **re1** commands. For information about how to use groups, see *Disabling Inheritance of a Junos OS Configuration Group*.

The responding Routing Engine must use Junos OS Release 5.0 or later.

#### Required Privilege Level

configure—To enter configuration mode.



**NOTE:** If you are using Junos OS in a Common Criteria environment, system log messages are created whenever a secret attribute is changed (for example, password changes or changes to the RADIUS shared secret). These changes are logged during the following configuration load operations:

```
load merge
load replace
load override
load update
```

For more information, see the *Secure Configuration Guide for Common Criteria and Junos-FIPS*.

#### Related Documentation

- Verifying a Junos Configuration, Committing a Junos OS Configuration
- Scheduling a Junos Commit Operation
- Deactivating and Reactivating Statements and Identifiers in a Junos Configuration
- Monitoring the Junos Commit Process
- Adding a Comment to Describe the Committed Configuration



## Sample Output

commit | display detail  
(QFX Series)

user@host> commit | display detail

```
-----
2011-08-24 01:08:08.00691 PDT: begin creating snapshots
2011-08-24 01:08:09.00210 PDT: end creating snapshots
2011-08-24 01:08:09.00211 PDT: begin preparing metadata
2011-08-24 01:08:09.00228 PDT: end preparing metadata
2011-08-24 01:08:09.00229 PDT: begin computing dcf root changes
2011-08-24 01:08:09.00236 PDT: end computing dcf root changes
2011-08-24 01:08:09.00244 PDT: begin computing additions
2011-08-24 01:08:09.00251 PDT: end computing additions
2011-08-24 01:08:09.00251 PDT: begin local object validation
2011-08-24 01:08:09.00251 PDT: end local object validation
2011-08-24 01:08:09.00252 PDT: begin update instances
2011-08-24 01:08:09.00252 PDT: end update instances
2011-08-24 01:08:09.00252 PDT: begin adjust metadata
2011-08-24 01:08:09.00252 PDT: end adjust metadata
2011-08-24 01:08:09.00253 PDT: begin validate metadata
2011-08-24 01:08:09.00253 PDT: end validate metadata
2011-08-24 01:08:09.00253 PDT: begin adjust allocations
2011-08-24 01:08:09.00254 PDT: end adjust allocations
2011-08-24 01:08:09.00254 PDT: begin adjust dependencies
2011-08-24 01:08:09.00254 PDT: end adjust dependencies
2011-08-24 01:08:09.00255 PDT: begin instance validation
2011-08-24 01:08:09.00255 PDT: end instance validation
2011-08-24 01:08:09.00255 PDT: begin opening all sessions eagerly
2011-08-24 01:08:09.00277 PDT: begin request #1 [login]
2011-08-24 01:08:09.00278 PDT: end request #1 [login]
2011-08-24 01:08:09.00325 PDT: begin processing globals
2011-08-24 01:08:09.00330 PDT: begin waiting for stamp check
(qfabric-default---node0)
2011-08-24 01:08:09.00334 PDT: end reply #1 [login]
2011-08-24 01:08:09.00351 PDT: end reply #1 [login]
2011-08-24 01:08:09.00451 PDT: begin request #2 [open]
2011-08-24 01:08:09.00451 PDT: end request #2 [open]
2011-08-24 01:08:09.00451 PDT: begin request #3 [get commit history]
2011-08-24 01:08:09.00452 PDT: end request #3 [get commit history]
2011-08-24 01:08:09.00452 PDT: begin request #4 [load]
2011-08-24 01:08:09.00453 PDT: end request #4 [load]
2011-08-24 01:08:09.00453 PDT: begin request #5 [load]
2011-08-24 01:08:09.00454 PDT: begin reply #2 [open]
2011-08-24 01:08:09.00456 PDT: end reply #2 [open]
2011-08-24 01:08:09.00457 PDT: begin reply #3 [get commit history]
2011-08-24 01:08:09.00475 PDT: end reply #3 [get commit history]
2011-08-24 01:08:09.00476 PDT: begin reply #4 [load]
2011-08-24 01:08:09.00499 PDT: begin reply #5 [load]
2011-08-24 01:08:09.00501 PDT: end waiting for stamp check
(qfabric-default---node0)
2011-08-24 01:08:09.00501 PDT: begin waiting for open (qfabric-default---node0)
2011-08-24 01:08:09.00502 PDT: end waiting for open (qfabric-default---node0)
2011-08-24 01:08:09.00504 PDT: end processing globals
2011-08-24 01:08:09.00617 PDT: end request #5 [load]
2011-08-24 01:08:09.00617 PDT: begin request #6 [check]
2011-08-24 01:08:09.00617 PDT: end request #6 [check]
2011-08-24 01:08:09.00619 PDT: end reply #5 [load]
2011-08-24 01:08:09.00619 PDT: begin reply #6 [check]
2011-08-24 01:08:09.00730 PDT: end session
2011-08-24 01:08:09.00752 PDT: end request #5 [load]
2011-08-24 01:08:09.00754 PDT: begin request #6 [check]
```



```
2011-08-24 01:08:09.00755 PDT: end request #6 [check]
2011-08-24 01:08:09.00881 PDT: end request #5 [load]
2011-08-24 01:08:09.00961 PDT: begin commit to devices
2011-08-24 01:08:10.00668 PDT: begin request #8 [get commit history]
2011-08-24 01:08:10.00669 PDT: end request #8 [get commit history]
2011-08-24 01:08:10.00721 PDT: end session
2011-08-24 01:08:10.00727 PDT: end commit to devices
2011-08-24 01:08:10.00733 PDT: begin committing metadata
2011-08-24 01:08:10.00772 PDT: end committing metadata
2011-08-24 01:08:10.00772 PDT: begin calling commit callbacks
2011-08-24 01:08:10.00773 PDT: end calling commit callbacks
commit complete
```



## clear log

---

<b>Syntax</b>	<code>clear log <i>filename</i></code> <code>&lt;all&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Remove contents of a log file.
<b>Options</b>	<b><i>filename</i></b> —Name of the specific log file to delete.  <b>all</b> —(Optional) Delete the specified log file and all archived versions of it.
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show log on page 837</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear log on page 286</a>
<b>Output Fields</b>	See <a href="#">file list</a> for an explanation of output fields.

## Sample Output

### clear log

The following sample commands list log file information, clear the contents of a log file, and then display the updated log file information:

```
user@host> file list lcc0-re0:/var/log/sampled detail
lcc0-re0:
-----
-rw-r----- 1 root  wheel      26450 Jun 23 18:47 /var/log/sampled
total 1

user@host> clear log lcc0-re0:sampled
lcc0-re0:
-----

user@host> file list lcc0-re0:/var/log/sampled detail
lcc0-re0:
-----
-rw-r----- 1 root  wheel      57 Sep 15 03:44 /var/log/sampled
total 1
```



## clear chassis display message

<b>Syntax</b>	clear chassis display message
<b>Syntax (TX Matrix Router)</b>	clear chassis display message <lcc <i>number</i>   scc>
<b>Syntax (TX Matrix Plus Router)</b>	clear chassis display message <lcc <i>number</i>   sfc <i>number</i> >
<b>Syntax (QFabric Systems)</b>	clear chassis display message <node-device <i>name</i>   interconnect-device <i>name</i> >
<b>Release Information</b>	<p>Command introduced in Junos OS Release 7.5.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>sfc</b> option for the TX Matrix Plus routers introduced in Junos OS Release 9.6.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p>
<b>Description</b>	<p>(M40e, M160, M320, T Series routers, EX Series, and QFabric systems only) Clear or stop a text message on the craft interface display, which is on the front of the router or switch or on the LCD panel display on the router or switch. The craft interface alternates the display of text messages with standard craft interface messages, switching between messages every 2 seconds. By default, on both the router and the switch, the text message is displayed for 5 minutes. The craft interface display has four 20-character lines. The LCD panel display has two 16-character lines, and text messages appear only on the second line.</p>
<b>Options</b>	<p><b>none</b>—Clear or stop a text message on the craft interface display.</p> <p><b>interconnect-device <i>name</i></b>—(QFabric systems only) (Optional) On a QFabric system, clear or stop a text message on the LCD panel display on the specified Interconnect device.</p> <p><b>lcc <i>number</i></b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, clear or stop a text message on the craft interface on a specific T640 router that is connected to the TX Matrix router. On a TX Matrix Plus router, clear or stop a text message on the craft interface on a specific T1600 router that is connected to the TX Matrix Plus router. Replace <i>number</i> with a value from 0 through 3.</p> <p><b>node-device <i>name</i></b>—(QFabric systems only) (Optional) On a QFabric system, clear or stop a text message on the LCD panel display on the specified Node device in a Node group.</p> <p><b>scc</b>—(TX Matrix routers only) (Optional) Clear or stop a text message on the craft interface on the TX Matrix router (or switch-card chassis).</p> <p><b>sfc <i>number</i></b>—(TX Matrix Plus routers only) (Optional) Clear or stop a text message on the craft interface on the TX Matrix Plus router (or switch-fabric chassis). Replace <i>number</i> with 0.</p>



**Required Privilege Level** clear

**Related Documentation**

- [Configuring the LCD Panel on EX Series Switches \(CLI Procedure\)](#)
- [set chassis display message](#)
- [show chassis craft-interface](#)

**List of Sample Output** [clear chassis display message on page 288](#)

**Output Fields** See [show chassis craft-interface](#) for an explanation of output fields.

## Sample Output

### [clear chassis display message](#)

The following example displays and then clears the text message on the craft interface display:

```
user@host> show chassis craft-interface
Red alarm:      LED off, relay off
Yellow alarm:   LED off, relay off
Host OK LED:    On
Host fail LED:  Off
FPCs           0  1  2  3  4  5  6  7
-----
Green  ..  *..  *  *.
Red    .....
LCD screen:
+-----+
|NOC contact Dusty |
|(888) 526-1234    |
+-----+

user@host> clear chassis display message

user@host> show chassis craft-interface
Red alarm:      LED off, relay off
Yellow alarm:   LED off, relay off
Host OK LED:    On
Host fail LED:  Off
FPCs           0  1  2  3  4  5  6  7
-----
Green  ..  *..  *  *.
Red    .....
LCD screen:
+-----+
|host              |
|Up: 0+17:05:47    |
|                  |
|Temperature OK    |
+-----+
```



## clear system commit

---

<b>Syntax</b>	clear system commit
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Clear any pending commit operation.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	maintenance (or the actual user who scheduled the commit)
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show system commit on page 884</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">clear system commit on page 289</a> <a href="#">clear system commit (None Pending) on page 289</a> <a href="#">clear system commit (User Does Not Have Required Privilege Level) on page 289</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

<b>clear system commit</b>	user@host> clear system commit Pending commit cleared.
<b>clear system commit (None Pending)</b>	user@host> clear system commit No commit scheduled.
<b>clear system commit (User Does Not Have Required Privilege Level)</b>	user@host> clear system commit error: Permission denied



## clear system reboot

---

<b>Syntax</b>	clear system reboot <both-routing-engines>
<b>Syntax (EX Series Switches)</b>	clear system reboot <all-members> <both-routing-engines> <local> <member <i>member-id</i> >
<b>Syntax (TX Matrix Router)</b>	clear system reboot <both-routing-engines> <all-chassis   all-lcc   lcc <i>number</i>   scc>
<b>Syntax (TX Matrix Plus Router)</b>	clear system reboot <both-routing-engines> <all-chassis   all-lcc   lcc <i>number</i>   sfc <i>number</i> >
<b>Syntax (QFX Series)</b>	clear system reboot <infrastructure <i>name</i> > <interconnect-device <i>name</i> > <node-group <i>name</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Clear any pending system software reboots or halts. When issued on a TX Matrix router without any options, the default behavior clears all pending system software reboots or halts on all T640 routers connected to the TX Matrix router. When issued on a TX Matrix Plus router without any options, the default behavior clears all pending system software reboots or halts on all T1600 routers connected to the TX Matrix Plus router.
<b>Options</b>	<b>none</b> —Clear all pending system software reboots or halts.  <b>all-chassis</b> —(TX Matrix and TX Matrix Plus routers only) (Optional) Clear all halt or reboot requests for all the Routing Engines in the chassis.  <b>all-lcc</b> —(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, clear all halt or reboot requests for all T640 routers (or line-card chassis) connected to the TX Matrix router. On a TX Matrix Plus router, clear all halt or reboot requests for all T1600 routers (or line-card chassis) connected to the TX Matrix Plus router.  <b>all-members</b> —(EX4200 switches only) (Optional) Clear all halt or reboot requests on all members of the Virtual Chassis configuration.  <b>both-routing-engines</b> —(Systems with multiple Routing Engines) (Optional) Clear all halt or reboot requests on both Routing Engines. On a TX Matrix router, clear both Routing Engines on all chassis connected to the TX Matrix router. Likewise, on a TX Matrix



Plus router, clear both Routing Engines on all chassis connected to the TX Matrix Plus router.

**infrastructure *name***—(QFabric systems) (Optional) Clear all halt or reboot requests on the fabric control Routing Engines or fabric manager Routing Engines.

**interconnect-device *name***—(QFabric systems) (Optional) Clear all halt or reboot requests on the Interconnect device.

**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, clear all halt or reboot requests for a specific T640 router that is connected to the TX Matrix router. On a TX Matrix Plus router, clear all halt or reboot requests for a specific T1600 router that is connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.

**local**—(EX4200 switches only) (Optional) Clear all halt or reboot requests on the local Virtual Chassis member.

**member *member-id***—(EX4200 switches only) (Optional) Clear all halt or reboot requests on the specified member of the Virtual Chassis configuration. Replace ***member-id*** with a value from 0 through 9.

**node-group *name***—(QFabric systems) (Optional) Clear all halt or reboot requests on the Node group.

**scc**—(TX Matrix routers only) (Optional) Clear all halt or reboot requests for the TX Matrix router (or switch-card chassis).

**sfc *number***—(TX Matrix Plus routers only) (Optional) Clear all halt or reboot requests for the TX Matrix Plus router (or switch-fabric chassis). Replace ***number*** with 0.

**Required Privilege Level** maintenance

**Related Documentation**

- request system reboot
- [request system reboot on page 344](#)
- [Rebooting and Halting a QFX Series Product on page 147](#)

**List of Sample Output**

[clear system reboot on page 292](#)  
[clear system reboot \(TX Matrix Router\) on page 292](#)  
[clear system reboot \(QFX Series\) on page 292](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request.



## Sample Output

### clear system reboot

```
user@host> clear system reboot
reboot requested by root at Sat Dec 12 19:37:34 1998
[process id 17855]
Terminating...
```

### clear system reboot (TX Matrix Router)

```
user@host> clear system reboot
scc-re0:
-----
No shutdown/reboot scheduled.
lcc0-re0:
-----
No shutdown/reboot scheduled.
lcc2-re0:
-----
No shutdown/reboot scheduled.
```

### clear system reboot (QFX Series)

```
user@switch> clear system reboot node-group node1
No shutdown/reboot scheduled.
```



## file

<b>Syntax</b>	<code>file &lt;archive   checksum   compare   copy   delete   list   rename   show   source address   archive&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Archive files from the device, copy files to and from the router or switch, calculate the file checksum, compare files, delete a file from the device, list files on the device, rename a file, show file contents, or show the local address to initiate a connection.
<b>Options</b>	<p><b>archive (Optional)</b> —Archive, and optionally compress, one or multiple local system files as a single file, locally or at a remote location.</p> <p><b>checksum (Optional)</b> —Calculate the Message Digest 5 (MD5) checksum of a file.</p> <p><b>compare (Optional)</b> —Compare two local files and describe the differences between them in default, context, or unified output styles.</p> <p><b>copy (Optional)</b> —Copy files from one place to another on the local switch or between the local switch and a remote system.</p> <p><b>delete (Optional)</b> —Delete a file on the local switch.</p> <p><b>list (Optional)</b> —Display a list of files on the local switch.</p> <p><b>rename (Optional)</b> —Rename a file on the local switch.</p> <p><b>show (Optional)</b> —Display the contents of a file.</p> <p><b>source address (Optional)</b> —Specify the source address of the local file.</p>
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Viewing Files and Directories on a Device Running Junos OS</li> <li>Junos OS Operational Mode Commands</li> </ul>



## file archive

---

<b>Syntax</b>	<code>file archive destination <i>destination</i> source <i>source</i> &lt;compress&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Archive, and optionally compress, one or multiple local system files as a single file, locally or at a remote location.
<b>Options</b>	<p><b>destination <i>destination</i></b>—Destination of the archived file or files. Specify the destination as a URL or filename. The Junos OS adds one of the following suffixes if the destination filename does not already have it:</p> <ul style="list-style-type: none"><li>• For archived files—The suffix <b>.tar</b></li><li>• For archived and compressed files—The suffix <b>.tgz</b></li></ul> <p><b>source <i>source</i></b>—Source of the original file or files. Specify the source as a URL or filename.</p> <p><b>compress</b>—(Optional) Compress the archived file with the GNU zip (gzip) compression utility. The compressed files have the suffix <b>.tgz</b>.</p>
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">file archive (Multiple Files) on page 295</a> <a href="#">file archive (Single File) on page 295</a> <a href="#">file archive (with Compression) on page 295</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.



## Sample Output

### file archive (Multiple Files)

The following sample command archives all message files in the local directory **/var/log/messages** as the single file **messages-archive.tar**.

```
user@host> file archive source /var/log/messages* destination /var/log/messages-archive.tar
/usr/bin/tar: Removing leading / from absolute path names in the archive.
user@host>
```

### file archive (Single File)

The following sample command archives one message file in the local directory **/var/log/messages** as the single file **messages-archive.tar**.

```
user@host> file archive source /var/log/messages destination /var/log/messages-archive.tar
/usr/bin/tar: Removing leading / from absolute path names in the archive.
user@host>
```

### file archive (with Compression)

The following sample command archives and compresses all message files in the local directory **/var/log/messages** as the single file **messages-archive.tgz**.

```
user@host> file archive compress source /var/log/messages* destination
/var/log/messages-archive.tgz
/usr/bin/tar: Removing leading / from absolute path names in the archive.
```



## file checksum md5

---

<b>Syntax</b>	<code>file checksum md5 &lt;pathname&gt; filename</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Calculate the Message Digest 5 (MD5) checksum of a file.
<b>Options</b>	<b>pathname</b> —(Optional) Path to a filename.  <b>filename</b> —Name of a local file for which to calculate the MD5 checksum.
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Configuring Checksum Hashes for a Commit Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li><li>• Configuring Checksum Hashes for an Event Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li><li>• Configuring Checksum Hashes for an Op Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li><li>• Executing an Op Script from a Remote Site in the <i>Junos OS Configuration and Operations Automation Guide</i></li><li>• <a href="#">file checksum sha-256 on page 298</a></li><li>• <a href="#">file checksum sha1 on page 297</a></li><li>• op</li></ul>
<b>List of Sample Output</b>	<a href="#">file checksum md5 on page 296</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

**file checksum md5**

```
user@host> file checksum md5 jbundle-5.3R2.4-export-signed.tgz
MD5 (jbundle-5.3R2.4-export-signed.tgz) = 2a3b69e43f9bd4893729cc16f505a0f5
```



## file checksum sha1

<b>Syntax</b>	<code>file checksum sha1 &lt;pathname&gt; filename</code>
<b>Release Information</b>	<p>Command introduced in Junos OS Release 9.5.</p> <p>Command introduced in Junos OS Release 9.5 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p>
<b>Description</b>	Calculate the Secure Hash Algorithm (SHA-1) checksum of a file.
<b>Options</b>	<p><b>pathname</b>—(Optional) Path to a filename.</p> <p><b>filename</b>—Name of a local file for which to calculate the SHA-1 checksum.</p>
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Configuring Checksum Hashes for a Commit Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li> <li>• Configuring Checksum Hashes for an Event Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li> <li>• Configuring Checksum Hashes for an Op Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li> <li>• Executing an Op Script from a Remote Site in the <i>Junos OS Configuration and Operations Automation Guide</i></li> <li>• <a href="#">file checksum md5 on page 296</a></li> <li>• <a href="#">file checksum sha-256 on page 298</a></li> <li>• op</li> </ul>
<b>List of Sample Output</b>	<a href="#">file checksum sha1 on page 297</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

```
file checksum sha1      user@host> file checksum sha1 /var/db/scripts/opscript.slax

SHA1 (/var/db/scripts/commitscript.slax) = ba9e47120c7ce55cff29afd73eacd370e162c676
```



## file checksum sha-256

---

<b>Syntax</b>	<code>file checksum sha-256 &lt;pathname&gt; filename</code>
<b>Release Information</b>	Command introduced in Junos OS Release 9.5. Command introduced in Junos OS Release 9.5 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Calculate the Secure Hash Algorithm 2 family (SHA-256) checksum of a file.
<b>Options</b>	<b>pathname</b> —(Optional) Path to a filename. <b>filename</b> —Name of a local file for which to calculate the SHA-256 checksum.
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Configuring Checksum Hashes for a Commit Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li><li>• Configuring Checksum Hashes for an Event Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li><li>• Configuring Checksum Hashes for an Op Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li><li>• Executing an Op Script from a Remote Site in the <i>Junos OS Configuration and Operations Automation Guide</i></li><li>• <a href="#">file checksum md5 on page 296</a></li><li>• <a href="#">file checksum sha1 on page 297</a></li><li>• op</li></ul>
<b>List of Sample Output</b>	<a href="#">file checksum sha-256 on page 298</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

```
file checksum sha-256 user@host> file checksum sha-256 /var/db/scripts/commitscript.slax

SHA256 (/var/db/scripts/commitscript.slax) =
94c2b061fb55399e15babd2529453815601a602b5c98e5c12ed929c9d343dd71
```



## file compare

<b>Syntax</b>	<pre>file compare (files <i>filename filename</i>) &lt;context   unified&gt; &lt;ignore-white-space&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p>
<b>Description</b>	<p>Compare two local files and describe the differences between them in default, context, or unified output styles:</p> <ul style="list-style-type: none"> <li>• <b>Default</b>—In the first line of output, <b>c</b> means lines were changed between the two files, <b>d</b> means lines were deleted between the two files, and <b>a</b> means lines were added between the two files. The numbers preceding this alphabetical marker represent the first file, and the lines after the alphabetical marker represent the second file. A left angle bracket (&lt;) in front of output lines refers to the first file. A right angle bracket (&gt;) in front of output lines refers to the second file.</li> <li>• <b>Context</b>—The display is divided into two parts. The first part is the first file; the second part is the second file. Output lines preceded by an exclamation point (!) have changed. Additions are marked with a plus sign (+), and deletions are marked with a minus sign (-).</li> <li>• <b>Unified</b>—The display is preceded by the line number from the first and the second file (xx,xxx,x). Before the line number, additions to the file are marked with a plus sign (+), and deletions to the file are marked with a minus sign (-). The body of the output contains the affected lines. Changes are viewed as additions plus deletions.</li> </ul>
<b>Options</b>	<p><b>files <i>filename</i></b>—Names of two local files to compare.</p> <p><b>context</b>—(Optional) Display output in context format.</p> <p><b>ignore-white-space</b>—(Optional) Ignore changes in the amount of white space.</p> <p><b>unified</b>—(Optional) Display output in unified format.</p>
<b>Required Privilege Level</b>	none
<b>List of Sample Output</b>	<p><a href="#">file compare files on page 300</a></p> <p><a href="#">file compare files context on page 300</a></p> <p><a href="#">file compare files unified on page 300</a></p> <p><a href="#">file compare files unified ignore-white-space on page 300</a></p>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.



## Sample Output

### file compare files

```
user@host> file compare files /tmp/one /tmp/two
100c100
<          full-name "File 1";
---
>          full-name "File 2";
102c102
<          class foo; # 'foo' is not defined
---
>          class super-user;
```

### file compare files context

```
user@host> file compare files /tmp/one /tmp/two context
*** /tmp/one   Wed Dec  3 17:12:50 2003
--- /tmp/two   Wed Dec  3 09:13:14 2003
*****
*** 97,104 ****
        }
    }
    user bill {
!       full-name "Bill Smith";
!       class foo; # 'foo' is not defined
        authentication {
            encrypted-password SECRET;
        }
--- 97,105 ----
    }
    user bill {
!       full-name "Bill Smith";
!       uid 1089;
!       class super-user;
        authentication {
            encrypted-password SECRET;
        }
    }
```

### file compare files unified

```
user@host> file compare files /tmp/one /tmp/two unified
--- /tmp/one   Wed Dec  3 17:12:50 2003
+++ /tmp/two   Wed Dec  3 09:13:14 2003
@@ -97,8 +97,9 @@
    }
}
user bill {
-   full-name "Bill Smith";
-   class foo; # 'foo' is not defined
+   full-name "Bill Smith";
+   uid 1089;
+   class super-user;
    authentication {
        encrypted-passwordSECRET;
    }
}
```

### file compare files unified ignore-white-space

```
user@host> file compare files /tmp/one /tmp/two unified ignore-white-space
--- /tmp/one   Wed Dec  3 09:13:10 2003
+++ /tmp/two   Wed Dec  3 09:13:14 2003
@@ -99,7 +99,7 @@
    user bill {
```



```
full-name "Bill Smith";  
uid 1089;  
- class foo; # 'foo' is not defined  
+ class super-user;  
  authentication {  
    encrypted-password <SECRET>; # SECRET-DATA  
  }
```



## file delete

---

<b>Syntax</b>	<code>file delete <i>filename</i></code> <code>&lt;purge&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Delete a file on the local router or switch.
<b>Options</b>	<b><i>filename</i></b> —Name of the file to delete. For a routing matrix, include chassis information in the filename if the file to be deleted is not local to the Routing Engine from which the command is issued.  <b><i>purge</i></b> —(Optional) Overwrite regular files before deleting them.
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">file delete on page 302</a> <a href="#">file delete (Routing Matrix) on page 302</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

### file delete

```
user@host> file list /var/tmp
dcd.core
rpd.core
snmpd.core

user@host> file delete /var/tmp/snmpd.core
user@host> file list /var/tmp
dcd.core
rpd.core
```

### file delete (Routing Matrix)

```
user@host> file list lcc0-re0:/var/tmp
dcd.core
rpd.core
snmpd.core

user@host> file delete lcc0-re0:/var/tmp/snmpd.core
user@host> file list /var/tmp
dcd.core
rpd.core
```



## file list

---

<b>Syntax</b>	file list <detail   recursive> <filename>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display a list of files on the local router or switch.
<b>Options</b>	<p><b>none</b>—Display a list of all files for the current directory.</p> <p><b>detail   recursive</b>—(Optional) Display detailed output or descend recursively through the directory hierarchy, respectively.</p> <p><b>filename</b>—(Optional) Display a list of files. For a routing matrix, the filename must include the chassis information.</p>
<b>Additional Information</b>	The default directory is the home directory of the user logged in to the router or switch. To view available directories, enter a space and then a backslash (/) after the <b>file list</b> command. To view files within a specific directory, include a backslash followed by the directory and, optionally, subdirectory name after the <b>file list</b> command.
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">file list on page 304</a> <a href="#">file list (Routing Matrix) on page 304</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.



## Sample Output

### file list

```
user@host> file list /var/tmp
dcd.core
rpd.core
snmpd.core
```

### file list (Routing Matrix)

```
user@host> file list lcc0-re0:var/tmp
lcc0-re0:
```

```
-----
/var/tmp/:
.gdbinit
.pccardd
Test/
chassisd*
chassisd.nathan*
check_time*
cores/
diagTestPrep*
diagtest*
diagtest.regress*
do_switchovers*
dump_test*
err.manoj.log
esw_clearstats*
esw_counter*
esw_debug*
esw_debug_ge*
esw_filt_test*
esw_filter_tnp_addr*
esw_getstats*
esw_phy*
esw_stats*
```



## file rename

---

<b>Syntax</b>	<code>file rename <i>source destination</i></code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Rename a file on the local router or switch.
<b>Options</b>	<b><i>destination</i></b> —New name for the file.  <b><i>source</i></b> —Original name of the file. For a routing matrix, the filename must include the chassis information.
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">file rename on page 306</a> <a href="#">file rename (Routing Matrix) on page 306</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.



## Sample Output

### file rename

The following example lists the files in **/var/tmp**, renames one of the files, and then displays the list of files again to reveal the newly named file.

```
user@host> file list /var/tmp
dcd.core
rpd.core
snmpd.core

user@host> file rename /var/tmp/dcd.core /var/tmp/dcd.core.990413
user@host> file list /var/tmp
dcd.core.990413
rpd.core
snmpd.core
```

### file rename (Routing Matrix)

The following example lists the files in **/var/tmp**, renames one of the files, and then displays the list of files again to reveal the newly named file.

```
user@host> file list lcc0-re1:/var/tmp
lcc0-re1:
-----

/var/tmp:
.pccardd
sartre.conf
snmpd
syslogd.core-tarball.0.tgz

user@host> file rename lcc0-re0:/var/tmp/snmpd /var/tmp/snmpd.rr
user@host> file list lcc0-re1:/var/tmp
lcc0-re1:
-----

/var/tmp:
.pccardd
sartre.conf
snmpd.rr
syslogd.core-tarball.0.tgz
```



## file show

---

<b>Syntax</b>	<code>file show <i>filename</i></code> <code>&lt;encoding (base64   raw)&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the contents of a file.
<b>Options</b>	<b><i>filename</i></b> —Name of a file. For a routing matrix, the filename must include the chassis information.  <b>encoding (base64   raw)</b> —(Optional) Encode file contents with base64 encoding or show raw text.
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">file show on page 308</a> <a href="#">file show (Routing Matrix) on page 308</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.



## Sample Output

### file show

```
user@host> file show /var/log/messages
Apr 13 21:00:08 romney /kernel: so-1/1/2: loopback suspected; going to standby.
Apr 13 21:00:40 romney /kernel: so-1/1/2: loopback suspected; going to standby.
Apr 13 21:02:48 romney last message repeated 4 times
Apr 13 21:07:04 romney last message repeated 8 times
Apr 13 21:07:13 romney /kernel: so-1/1/0: Clearing SONET alarm(s) RDI-P
Apr 13 21:07:29 romney /kernel: so-1/1/0: Asserting SONET alarm(s) RDI-P
...
```

### file show (Routing Matrix)

```
user@host> file show lcc0-re0:/var/tmp/gdbinit
lcc0-re0:
-----
#####
# Settings
#####

set print pretty

#####
# Basic stuff
#####

define msgbuf
    printf "%s", msgbufp->msg_ptr
end
# hex dump of a block of memory
# usage: dump address length
define dump
    p $arg0, $arg1
    set $ch = $arg0
    set $j = 0
    set $n = $arg1
    while ($j < $n)
        #printf "%x %x ",&$ch[$j],$ch[$j]
        printf "%x ",$ch[$j]
        set $j = $j + 1
        if (!($j % 16))
            printf "\n"
        end
    end
end
end
```



## load

<b>Syntax</b>	load (factory-default   merge   override   patch   replace   set   update) load ( <i>filename</i>   terminal) <relative>
<b>QFX Series</b>	load (dhcp-snooping <i>filename</i> )
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Load a configuration from an ASCII configuration file, from terminal input, or from the factory default. Your current location in the configuration hierarchy is ignored when the load operation occurs.
<b>Options</b>	<p><b>dhcp-snooping</b>—(QFX Series switches) Loads DHCP snooping entries.</p> <p><b>factory-default</b>—Loads the factory configuration. The factory configuration contains the manufacturer's suggested configuration settings. The factory configuration is the router or switch's first configuration and is loaded when the router or switch is first installed and powered on.</p> <p>On J Series Services Routers, pressing and holding down the Config button on the router for 15 seconds causes the factory configuration to be loaded and committed. However, this operation deletes all other configurations on the router; using the <b>load factory-default</b> command does not.</p> <p><b>filename</b>—Name of the file to load. For information about specifying the filename, see Viewing Files and Directories on a Device Running Junos OS.</p> <p><b>merge</b>—Combine the configuration that is currently shown in the CLI with the configuration.</p> <p><b>override</b>—Discard the entire configuration that is currently shown in the CLI and load the entire configuration. Marks every object as changed.</p> <p><b>patch</b>—Change part of the configuration and mark only those parts as changed.</p> <p><b>replace</b>—Look for a <b>replace</b> tag in <i>filename</i>, delete the existing statement of the same name, and replace it with the configuration.</p> <p><b>set</b>—Merge a set of commands with an existing configuration. This option executes the configuration instructions line by line as they are stored in a file or from a terminal. The instructions can contain any configuration mode command, such as <b>set</b>, <b>edit</b>, <b>exit</b>, and <b>top</b>.</p> <p><b>relative</b>—(Optional) Use the <b>merge</b> or <b>replace</b> option without specifying the full hierarchy level.</p> <p><b>terminal</b>—Use the text you type at the terminal as input to the configuration. Type Ctrl+d to end terminal input.</p> <p><b>update</b>—Discard the entire configuration that is currently shown in the CLI, and load the entire configuration. Marks changed objects only.</p>





**NOTE:** If you are using Junos OS in a Common Criteria environment, system log messages are created whenever a secret attribute is changed (for example, password changes or changes to the RADIUS shared secret). These changes are logged during the following configuration load operations:

```
load merge
load replace
load override
load update
```

For more information, see the *Secure Configuration Guide for Common Criteria and Junos-FIPS*.

---

<b>Required Privilege Level</b>	configure—To enter configuration mode, but other required privilege levels depend on where the statement is located in the configuration hierarchy.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Loading a Configuration from a File on page 1119</a></li></ul>
------------------------------	--



## ping

**Syntax**    `ping host`  
               `<bypass-routing>`  
               `<count requests>`  
               `<detail>`  
               `<do-not-fragment>`  
               `<inet | inet6>`  
               `<interface source-interface>`  
               `<interval seconds>`  
               `<logical-system logical-system-name>`  
               `<loose-source value>`  
               `<mac-address mac-address>`  
               `<no-resolve>`  
               `<pattern string>`  
               `<rapid>`  
               `<record-route>`  
               `<routing-instance routing-instance-name>`  
               `<size bytes>`  
               `<source source-address>`  
               `<strict >`  
               `<strict-source value.>`  
               `<tos type-of-service>`  
               `<ttl value>`  
               `<verbose>`  
               `<vpls instance-name>`  
               `<wait seconds>`

**Syntax (QFX Series)**    `ping host`  
                               `<bypass-routing>`  
                               `<count requests>`  
                               `<detail>`  
                               `<do-not-fragment>`  
                               `<inet>`  
                               `<interface source-interface>`  
                               `<interval seconds>`  
                               `<logical-system logical-system-name>`  
                               `<loose-source value>`  
                               `<mac-address mac-address>`  
                               `<no-resolve>`  
                               `<pattern string>`  
                               `<rapid>`  
                               `<record-route>`  
                               `<routing-instance routing-instance-name>`  
                               `<size bytes>`  
                               `<source source-address>`  
                               `<strict>`  
                               `< strict-source value>`  
                               `<tos type-of-service>`  
                               `<ttl value>`  
                               `<verbose>`  
                               `<wait seconds>`

**Release Information**    Command introduced before Junos OS Release 7.4.



Command introduced in Junos OS Release 9.0 for EX Series switches.  
Command introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Check host reachability and network connectivity. The **ping** command sends Internet Control Message Protocol (ICMP) ECHO\_REQUEST messages to elicit ICMP ECHO\_RESPONSE messages from the specified host. Press Ctrl+c to interrupt a ping command.

**Options** **host**—IP address or hostname of the remote system to ping.

**bypass-routing**—(Optional) Bypass the normal routing tables and send ping requests directly to a system on an attached network. If the system is not on a directly attached network, an error is returned. Use this option to ping a local system through an interface that has no route through it.

**count requests**—(Optional) Number of ping requests to send. The range of values is 1 through 2,000,000,000. The default value is an unlimited number of requests.

**detail**—(Optional) Include in the output the interface on which the ping reply was received.

**do-not-fragment**—(Optional) Set the do-not-fragment (DF) flag in the IP header of the ping packets. For IPv6 packets, this option disables fragmentation.



**NOTE:** In Junos OS Release 11.1 and later, when issuing the **ping** command for an IPv6 route with the **do-not-fragment** option, the maximum ping packet size is calculated by subtracting 48 bytes (40 bytes for the IPV6 header and 8 bytes for the ICMP header) from the MTU. Therefore, if the ping packet size (including the 48-byte header) is greater than the MTU, the ping operation might fail.

**inet**—(Optional) Ping Packet Forwarding Engine IPv4 routes.

**inet6**—(Optional) Ping Packet Forwarding Engine IPv6 routes.

**interface source-interface**—(Optional) Interface to use to send the ping requests.

**interval seconds**—(Optional) How often to send ping requests. The range of values, in seconds, is 1 through infinity. The default value is 1.

**logical-system logical-system-name**—(Optional) Name of logical system from which to send the ping requests.

Alternatively, enter the **set cli logical-system logical-system-name** command and then run the **ping** command. To return to the main router, enter the **clear cli logical-system** command.

**loose-source value**—(Optional) Intermediate loose source route entry (IPv4). Open a set of values.



**mac-address *mac-address***—(Optional) Ping the physical or hardware address of the remote system you are trying to reach.

**no-resolve**—(Optional) Do not attempt to determine the hostname that corresponds to the IP address.

**pattern *string***—(Optional) Specify a hexadecimal fill pattern to include in the ping packet.

**rapid**—(Optional) Send ping requests rapidly. The results are reported in a single message, not in individual messages for each ping request. By default, five ping requests are sent before the results are reported. To change the number of requests, include the **count** option.

**record-route**—(Optional) Record and report the packet's path (IPv4).

**routing-instance *routing-instance-name***—(Optional) Name of the routing instance for the ping attempt.

**size *bytes***—(Optional) Size of ping request packets. The range of values, in bytes, is **0** through **65,468**. The default value is **56**, which is effectively 64 bytes because 8 bytes of ICMP header data are added to the packet.

**source *source-address***—(Optional) IP address of the outgoing interface. This address is sent in the IP source address field of the ping request. If this option is not specified, the default address is usually the loopback interface (**lo.0**).

**strict**—(Optional) Use the strict source route option (IPv4).

**strict-source *value***—(Optional) Intermediate strict source route entry (IPv4). Open a set of values.

**tos *type-of-service***—(Optional) Set the type-of-service (ToS) field in the IP header of the ping packets. The range of values is **0** through **255**.

**ttl *value***—(Optional) Time-to-live (TTL) value to include in the ping request (IPv6). The range of values is **0** through **255**.

**verbose**—(Optional) Display detailed output.

**vpls *instance-name***—(Optional) Ping the instance to which this VPLS belongs.

**wait *seconds***—(Optional) Maximum wait time, in seconds, after the final packet is sent. If this option is not specified, the default delay is **10** seconds. If this option is used without the count option, a default count of **5** packets is used.

**Required Privilege Level** network

**Related Documentation** • [Configuring the Junos OS ICMPv4 Rate Limit for ICMPv4 Routing Engine Messages](#)

**List of Sample Output** [ping hostname on page 314](#)  
[ping hostname rapid on page 314](#)



[ping hostname size count on page 314](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request. An exclamation point (!) indicates that an echo reply was received. A period (.) indicates that an echo reply was not received within the timeout period. An x indicates that an echo reply was received with an error code. These packets are not counted in the received packets count. They are accounted for separately.

## Sample Output

### ping hostname

```
user@host> ping skye
PING skye.net (192.168.169.254): 56 data bytes
64 bytes from 192.168.169.254: icmp_seq=0 ttl=253 time=1.028 ms
64 bytes from 192.168.169.254: icmp_seq=1 ttl=253 time=1.053 ms
64 bytes from 192.168.169.254: icmp_seq=2 ttl=253 time=1.025 ms
64 bytes from 192.168.169.254: icmp_seq=3 ttl=253 time=1.098 ms
64 bytes from 192.168.169.254: icmp_seq=4 ttl=253 time=1.032 ms
64 bytes from 192.168.169.254: icmp_seq=5 ttl=253 time=1.044 ms
^C [abort]
```

### ping hostname rapid

```
user@host> ping skye rapid
PING skye.net (192.168.169.254): 56 data bytes
!!!!!!
--- skye.net ping statistics ---
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max/stddev = 0.956/0.974/1.025/0.026 ms
```

### ping hostname size count

```
user@host> ping skye size 200 count 5
PING skye.net (192.168.169.254): 200 data bytes
208 bytes from 192.168.169.254: icmp_seq=0 ttl=253 time=1.759 ms
208 bytes from 192.168.169.254: icmp_seq=1 ttl=253 time=2.075 ms
208 bytes from 192.168.169.254: icmp_seq=2 ttl=253 time=1.843 ms
208 bytes from 192.168.169.254: icmp_seq=3 ttl=253 time=1.803 ms
208 bytes from 192.168.169.254: icmp_seq=4 ttl=253 time=17.898 ms

--- skye.net ping statistics ---
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max = 1.759/5.075/17.898 ms
```



## request chassis beacon

<b>Syntax (QFX Series)</b>	<pre>request chassis beacon &lt;all (off   on)&gt; &lt;fpc slot-number (off   on)&gt; &lt;interconnect-device name (cb slot-number   fpc slot-number   (off   on)&gt; &lt;node-device name (off   on)&gt;</pre>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	(QFX Series only) Enable or disable the beacon LED on a QFX Series device.
<b>Options</b>	<p><b>all</b>—Turn the beacon LED either <b>on</b> or <b>off</b> on all QFabric system Interconnect and Node devices.</p> <p><b>cb slot-number</b>—Turn the beacon LED either <b>on</b> or <b>off</b> on the Control Board of the QFX3008-I Interconnect device.</p> <p><b>fpc slot-number</b>—Turn the beacon LED either <b>on</b> or <b>off</b> on the Flexible PIC Concentrator on the standalone QFX3500 switch or the Interconnect device.</p> <p><b>interconnect-device name</b>—Turn the beacon LED either <b>on</b> or <b>off</b> on the Interconnect device.</p> <p><b>node-device name</b>—Turn the beacon LED either <b>on</b> or <b>off</b> on the Node device.</p> <p><b>off</b>—Turn the beacon LED <b>off</b>.</p> <p><b>on</b>—Turn the beacon LED <b>on</b>.</p>
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show chassis beacon on page 419</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">request chassis beacon fpc 0 on (QFX Series) on page 316</a> <a href="#">request chassis beacon node-device (QFabric System) on page 316</a> <a href="#">request chassis beacon on interconnect-device fpc (QFabric System) on page 316</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.



## Sample Output

```
request chassis beacon
fpc 0 on (QFX Series)
```

```
user@switch> request chassis beacon fpc 0 on



Beacon set to ON
```

```
request chassis beacon node-device (QFabric System) node1 ON
```

request chassis beacon on interconnect-device fpc (QFabric System)	user@switch> request chassis beacon on interconnect-device fpc 2
FPC 2	ON



## request chassis cb

<b>Syntax</b>	<code>request chassis cb (offline   online) slot <i>slot-number</i></code>
<b>Syntax (TX Matrix Router)</b>	<code>request chassis cb (offline   online) &lt;slot <i>slot-number</i>   lcc <i>number</i> slot <i>cb-slot-number</i>   scc <i>number</i> slot <i>cb-slot-number</i>&gt;</code>
<b>Syntax (TX Matrix Plus Router)</b>	<code>request chassis cb (offline   online) &lt;slot <i>slot-number</i>   lcc <i>number</i> slot <i>cb-slot-number</i>   sfc <i>number</i> slot <i>cb-slot-number</i>&gt;</code>
<b>Syntax (QFabric System)</b>	<code>request chassis cb (offline   online) interconnect-device <i>name</i> slot <i>slot-number</i> &lt;interconnect-device <i>name</i> slot <i>slot-number</i> (offline   online)&gt;</code>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS 9.4 for EX Series switches.</p> <p><b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6.</p> <p>Command introduced in Junos OS 11.3 for QFX Series.</p> <p>Command introduced in Junos OS Release 12.3 for MX2020 3D Universal Edge Routers.</p> <p>Command introduced in Junos OS Release 12.3 for MX2010 3D Universal Edge Routers.</p>
<b>Description</b>	(M120, M320, and MX Series routers and T Series routers, QFabric systems, and EX8200 switches only) Control the operation of the Control Board (CB). For information about the meaning of “CBs” on the switches, see EX Series Switches Hardware and CLI Terminology Mapping.
<b>Options</b>	<p><b>offline</b>—Take the Control Board offline.</p> <div style="margin-top: 20px;">  <p><b>NOTE:</b> On a QFabric system, to bring the backup Control Board on a QFX3008-I Interconnect device offline, issue the <code>request chassis cb slot <i>backup-slot-number</i> offline</code> command.</p> </div> <div style="margin-top: 20px;">  <p><b>NOTE:</b> Only backup Control Board can be turned offline or online. To turn a Control Board offline or to bring it back online, the Routing Engine should be turned offline first.</p> </div> <p><b>online</b>—Bring the Control Board online.</p> <p><b>interconnect-device <i>name</i></b>—(QFabric systems only) (Optional) Bring the QFX3008-I Interconnect device Control Board either offline or online:</p> <p><b>slot <i>slot-number</i></b>—Control Board slot number:</p>



- (TX Matrix and TX Matrix Plus routers only) On a TX Matrix router, if you specify the number of the T640 router by using the **lcc number** option (the recommended method), replace **cb-slot-number** with a value from 0 through 1.

Likewise, on a TX Matrix Plus router, if you specify the number of the T1600 router by using the **lcc number** option (the recommended method), replace **cb-slot-number** with a value from 0 through 1.

- M320 router—Replace **slot-number** with a value from 0 through 1.
- MX480/MX240 routers—Replace **slot-number** with a value from 0 through 1.
- MX960 router—Replace **slot-number** with a value from 0 through 2.
- MX2020 and MX2010 routers—Replace **slot-number** with 0 or 1.
- EX8208 switch—Replace **slot-number** with a value from 0 through 2.
- EX8216 switch—Replace **slot-number** with a value from 0 through 1.
- QFabric System—Replace **slot-number** with a value from 0 through 1.

**sfc number**—(TX Matrix Plus routers only) (Optional) Change the CB status for the TX Matrix Plus router (or switch-fabric chassis). Replace **number** with 0.

**Required Privilege Level** maintenance

**Related Documentation**

- [show chassis environment cb on page 517](#)
- Switching Control Board Redundancy
- Routing Engine and Switching Control Board Redundancy Configuration Statements

**List of Sample Output**

- [request chassis cb on page 319](#)
- [request chassis cb interconnect-device \(QFabric System\) on page 319](#)
- [request chassis cb \(MX2020 Router\) on page 319](#)
- [request chassis cb \(MX2010 Router\) on page 319](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request.



## Sample Output

request chassis cb

```
user@host> request chassis cb offline slot 1
Backup CB 1 cannot be set offline, backup RE is online
```

request chassis cb  
interconnect-device  
(QFabric System)

```
user@switch> request chassis cb interconnect-device interconnect1 offline slot 1
Backup CB 1 cannot be set offline, backup RE is online
```

request chassis cb  
(MX2020 Router)

```
user@host> request chassis cb offline slot 1
Backup CB 1 cannot be set offline, backup RE is online
```

request chassis cb  
(MX2010 Router)

```
user@host> request chassis cb offline slot 1
Backup CB 1 cannot be set offline, backup RE is online
```



## request chassis fpc

---

<b>Syntax</b>	request chassis fpc (offline   online   restart) slot <i>slot-number</i>
<b>Syntax (TX Matrix and TX Matrix Plus Routers)</b>	request chassis fpc (offline   online   restart) slot <i>slot-number</i> <lcc <i>number</i> >
<b>Syntax (MX Series Routers)</b>	request chassis fpc (offline   online   restart) slot <i>slot-number</i> <all-members> <local> <member <i>member-id</i> >
<b>Syntax (MX2020 3D Universal Edge Routers)</b>	request chassis fpc (offline   online   restart) slot <i>slot-number</i>
<b>Syntax (MX2010 3D Universal Edge Routers)</b>	request chassis fpc (offline   online   restart) slot <i>slot-number</i>
<b>Syntax (QFabric System)</b>	request chassis fpc <interconnect-device <i>name</i> slot <i>slot-number</i> (offline   online)> <(offline   online) interconnect-device <i>name</i> slot <i>slot-number</i> > <slot <i>slot-number</i> interconnect-device <i>name</i> (offline   online)>
<b>Syntax (PTX Series Packet Transport Switches)</b>	request chassis fpc (offline   online   restart) slot <i>slot-number</i>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS 11.3 for QFX Series. Command introduced in Junos OS 12.1 for PTX Series Packet Transport Switches. Command introduced in Junos OS Release 12.3 for MX2020 3D Universal Edge Routers. Command introduced in Junos OS Release 12.3 for MX2010 3D Universal Edge Routers.
<b>Description</b>	(M20, M40, M40e, M120, M160, M320, MX Series, and T Series routers, QFabric systems, EX Series switches, and PTX Series Packet Transport Switches only) Control the operation of the Flexible PIC Concentrator (FPC). For information about the meaning of “FPCs” on the switches, see EX Series Switches Hardware and CLI Terminology Mapping.
<b>Options</b>	<b>offline</b> —Take the FPC offline.  <b>online</b> —Bring the FPC online.  <b>interconnect-device <i>name</i></b> —(QFabric systems only) Bring the Flexible Port Concentrator (FPC) on the QFX3008-I Interconnect device either offline or online:



- (QFabric System) On a QFabric system, specify the name of the QFX3008-I Interconnect device containing the Flexible Port Concentrator (FPC) you want to bring either offline or online.

**restart**—Restart the FPC.

**slot slot-number**—FPC slot number:

- M20 router—0 through 3.
- M120 router—0 through 5.
- MX240 router—0 through 2. On the MX240 router, slot-number corresponds to the Dense Port Concentrator (DPC) slot number. If an MPC is installed, slot-number corresponds to the MPC slot number.
- MX480 router—0 through 5. On the MX480 router, slot-number corresponds to the Dense Port Concentrator (DPC) slot number. If an MPC is installed, slot-number corresponds to the MPC slot number.
- MX960 router—0 through 11. On the MX960 router, slot-number corresponds to the Dense Port Concentrator (DPC) slot number. If an MPC is installed, slot-number corresponds to the MPC slot number.
- MX2020 router—0 through 19.
- MX2010 router—0 through 9.
- TX Matrix and TX Matrix Plus routers only—On the TX Matrix router, if you specify the number of the T640 router by using the **lcc number** option (the recommended method), replace **slot-number** with a value from 0 through 7. Otherwise, replace **slot-number** with a value from 0 through 31.

Likewise, on a TX Matrix Plus router, if you specify the number of the T1600 router by using the **lcc number** option (the recommended method), replace **slot-number** with a value from 0 through 7. Otherwise, replace **slot-number** with a value from 0 through 31. For example, the following commands have the same result:

```
user@host> request chassis fpc lcc 1 slot 1 offline
user@host> request chassis fpc slot 9 offline
```

- Other routers—0 through 7.
- QFabric System—Replace **slot-number** with a value from 0 through 2.
- EX Series switches:
  - EX4200 switches in a Virtual Chassis configuration—Replace **slot-number** with a value from 0 through 9.
  - EX6210 switches—Replace **slot-number** with a value from 0 through 9.



**NOTE:** These commands are not supported for slots 4 and 5 when a Switch Fabric and Routing Engine (SRE) module is installed in those slots. These commands are supported for slots 4 and 5 only if a line card is installed in them.



- EX8208 switches—Replace **slot-number** with a value from 0 through 7.
- EX8216 switches—Replace **slot-number** with a value from 0 through 15.
- PTX5000 Packet Transport Switch—Replace **slot-number** with a value from 0 through 7.

**all-members**—(MX Series routers only) (Optional) Change FPC status of all members of the Virtual Chassis configuration.

**local**—(MX Series routers only) (Optional) Change FPC status of the local Virtual Chassis member.

**member member-id**—(MX Series routers only) (Optional) Change FPC status of the specified member of the Virtual Chassis configuration. Replace **member-id** with a value of 0 or 1.

**lcc number**—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, control the FPC in a specified T640 router that is connected to the TX Matrix router. On a TX Matrix Plus router, control the FPC in a specified T1600 router that is connected to the TX Matrix Plus router. Replace **number** with a value from 0 through 3.

**Required Privilege Level**

maintenance

**Related Documentation**

- [show chassis fpc on page 599](#)
- show chassis fpc-feb-connectivity
- show chassis fabric fpcs
- Configuring the Junos OS to Make a Flexible PIC Concentrator Stay Offline
- Configuring the Junos OS to Resynchronize FPC Sequence Numbers with Active FPCs when an FPC Comes Online
- MX960 Flexible PIC Concentrator Description

**List of Sample Output**

[request chassis fpc on page 322](#)  
[request chassis fpc \(MX Series Routers with Media Services Blade \[MSB\]\) on page 322](#)  
[request chassis fpc \(MX2020 Router\) on page 323](#)  
[request chassis fpc \(MX2010 Router\) on page 323](#)

**Output Fields**

When you enter this command, you are provided feedback on the status of your request.

## Sample Output

**request chassis fpc**

```
user@host> request chassis fpc online slot 0
FPC 0 already online
```

**request chassis fpc  
(MX Series Routers)**

```
user@host> request chassis fpc slot 0
```



with Media Services  
Blade [MSB])

Possible completions:

offline	Take FPC offline
online	Bring FPC online
restart	Restart FPC

request chassis fpc  
(MX2020 Router)

user@host >request chassis fpc online slot 2  
FPC 2 already online

request chassis fpc  
(MX2010 Router)

user@host >request chassis fpc offline slot 5  
Offline initiated, use "show chassis fpc" to verify



## request chassis routing-engine master

<b>Syntax</b>	request chassis routing-engine master (acquire   release   switch) <force> <no-confirm>
<b>Syntax (TX Matrix Routers)</b>	request chassis routing-engine master (acquire   release   switch) (lcc <i>number</i>   scc   all-chassis) <force> <no-confirm>
<b>Syntax (TX Matrix Plus Routers)</b>	request chassis routing-engine master (acquire   release   switch) (lcc <i>number</i>   sfc   all-chassis   all-lcc) <force> <no-confirm>
<b>Syntax (MX Series Routers)</b>	request chassis routing-engine master (acquire   release   switch) <all-members> <force> <local> <member <i>member-id</i> > <no-confirm>
<b>Syntax (MX2010 3D Universal Edge Routers)</b>	request chassis routing-engine master (acquire   release   switch <check>) <no-confirm>
<b>Syntax (MX2020 3D Universal Edge Routers)</b>	request chassis routing-engine master (acquire   release   switch <check>) <no-confirm>
<b>Syntax (QFX Series)</b>	request chassis routing-engine master (release   switch) <check> <interconnect-device <i>name</i> > <node-group <i>name</i> > <no-confirm>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. all-chassis option added in Junos OS Release 8.0. Command introduced in Junos OS Release 9.0 for EX Series switches. sfc option introduced for the TX Matrix Plus router in Junos OS Release 9.6. Command introduced in Junos OS Release 11.3 for QFX Series. Command introduced in Junos OS Release 12.3 for MX2020 3D Universal Edge Routers. Command introduced in Junos OS Release 12.3 for MX2010 3D Universal Edge Routers.
<b>Description</b>	For routers or switches with multiple Routing Engines, control which Routing Engine is the master.



**CAUTION:** (Routing matrix based on the TX Matrix or TX Matrix Plus routers only) Within the routing matrix, we recommend that all Routing Engines run the same Junos OS Release. If you run different releases on the Routing



Engines and a change in mastership occurs on any backup Routing Engine in the routing matrix, one or all T640 routers (in a routing matrix based on the TX Matrix router) or T1600 routers (in a routing matrix based on a TX Matrix Plus router) might become logically disconnected from the TX Matrix router and cause data loss. For more information, see the [TX Matrix Router Hardware Guide](#) or the Junos OS High Availability Configuration Guide.



**NOTE:** Successive graceful Routing Engine switchover events must be a minimum of 240 seconds (4 minutes) apart after both Routing Engines have come up.

If the router or switch displays a warning message similar to “Standby Routing Engine is not ready for graceful switchover. Packet Forwarding Engines that are not ready for graceful switchover might be reset,” do not attempt switchover. If you choose to proceed with switchover, only the Packet Forwarding Engines that were not ready for graceful switchover are reset. None of the Flexible PIC concentrators (FPCs) should spontaneously restart. We recommend that you wait until the warning no longer appears and then proceed with the switchover.

You will receive an error message stating “Command aborted. Not ready for mastership switch, try after n seconds” when this command is re-entered before 240 seconds have elapsed on EX Series switches.



**NOTE:** On a QFabric system, to avoid traffic loss on the network Node group, switch mastership of the routing engine to the backup routing engine, and then reboot.

**Options** **acquire**—Attempt to become the master Routing Engine.

**release**—Request that the other Routing Engine become the master.

**switch**—Toggle mastership between Routing Engines.

The **acquire**, **release**, and **switch** options have the following suboptions:

**all-chassis**—(TX Matrix and TX Matrix Plus routers only) On a routing matrix composed of a TX Matrix router and the attached T640 routers, switch mastership on all the Routing Engines in the routing matrix. Likewise, on a routing matrix composed of a TX Matrix Plus router and the attached T1600 routers, switch mastership on all the Routing Engines in the routing matrix.

**all-lcc**—(TX Matrix Plus routers only) Request to acquire mastership for all line-card chassis (LCC).



**all-members**—(MX Series routers only) (Optional) Control Routing Engine mastership on the Routing Engines in all member routers of the Virtual Chassis configuration.

**check**—(QFabric systems, MX240, MX480, MX960, MX2010, and MX2020 Routers only) (Optional) Available only with the **switch** option. Check graceful switchover status of the standby Routing Engine before toggling mastership between Routing Engines.

**interconnect-device *name***—(QFabric systems only) (Optional) Control Routing Engine mastership on the Routing Engines on an Interconnect device.

**lcc *number***—(TX Matrix and TX Matrix Plus routers only) On a TX Matrix router, the T640 router (or LCC) that is connected to the TX Matrix router (or switch-card chassis). On a TX Matrix Plus router, the T1600 router (or LCC) that is connected to the TX Matrix Plus router (or switch-fabric chassis). Replace ***number*** with a value from 0 through 3.

**local**—(MX Series routers only) (Optional) Control Routing Engine mastership on the Routing Engines in the local Virtual Chassis member.

**member *member-id***—(MX Series routers only) (Optional) Control Routing Engine mastership on the Routing Engines of the specified member in the Virtual Chassis Configuration. Replace ***member-id*** with a value of 0 or 1.

**no-confirm**—(Optional) Do not request confirmation for the switch.

**node-group *name***—(QFabric systems only) (Optional) Control Routing Engine mastership on the Routing Engines on a Node group.

**scc**—(TX Matrix routers only) TX Matrix (or switch-card chassis).

**sfc**—(TX Matrix Plus routers only) TX Matrix Plus router (or switch-fabric chassis).

**force**—(Optional) Available only with the acquire option. Force the change to a new master Routing Engine.

#### Additional Information

Because both Routing Engines are always running, the transition from one to the other as the master Routing Engine is immediate. However, the changeover interrupts communication to the System and Switch Board (SSB). The SSB takes several seconds to reinitialize the Flexible PIC Concentrators (FPCs) and restart the PICs. Interior gateway protocol (IGP) and BGP convergence times depend on the specific network environment.

By default, the Routing Engine in slot 0 (RE0) is the master and the Routing Engine in slot 1 (RE1) is the backup. To change the default master Routing Engine, include the **routing-engine** statement at the [edit chassis redundancy] hierarchy level in the configuration. For more information, see the Junos OS System Basics Configuration Guide

To have the backup Routing Engine become the master Routing Engine, use the **request chassis routing-engine master switch** command. If you use this command to change the master and then restart the chassis software for any reason, the master reverts to the default setting.





**NOTE:** Although the configurations on the two Routing Engines do not have to be the same and are not automatically synchronized, we recommend making both configurations the same.

<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show chassis routing-engine on page 781</a></li> <li>• Configuring Routing Engine Redundancy</li> <li>• Switching the Global Master and Backup Roles in a Virtual Chassis Configuration</li> </ul>
<b>List of Sample Output</b>	<a href="#">request chassis routing-engine master acquire on page 327</a> <a href="#">request chassis routing-engine master switch on page 327</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

### [request chassis routing-engine master acquire](#)

```
user@host> request chassis routing-engine master acquire
warning: Traffic will be interrupted while the PFE is re-initialized
warning: The other routing engine's file system could be corrupted
Reset other routing engine and become master ? [yes,no] (no)
```

### [request chassis routing-engine master switch](#)

```
user@host> request chassis routing-engine master switch
warning: Traffic will be interrupted while the PFE is re-initialized
Toggle mastership between Routing Engines ? [yes,no] (no) yes

Resolving mastership...
Complete. The other Routing Engine becomes the master.

Switch mastership back to the local Routing Engine:

user@host> request chassis routing-engine master switch

warning: Traffic will be interrupted while the PFE is re-initialized
Toggle mastership between routing engines ? [yes,no] (no) yes

Resolving mastership...
Complete. The local routing engine becomes the master.
```



## request message

---


<b>Syntax</b>	<code>request message all message "text"</code> <code>request message message "text" (terminal <i>terminal-name</i>   user <i>user-name</i>)</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display a message on the screens of all users who are logged in to the router or switch or on specific screens.
<b>Options</b>	<b>all</b> —Display a message on the terminal of all users who are currently logged in.  <b>message "text"</b> —Message to display.  <b>terminal <i>terminal-name</i></b> —Name of the terminal on which to display the message.  <b>user <i>user-name</i></b> —Name of the user to whom to direct the message.
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">request message message on page 328</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

<code>request message message</code>	<pre>user@host&gt; request message message "Maintenance window in 10 minutes" user maria Message from user@host on tty0 at 20:27 ... Maintenance window in 10 minutes EOF</pre>
--------------------------------------	---



## request system configuration rescue delete

<b>Syntax</b>	request system configuration rescue delete
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Delete an existing rescue configuration.
	<div>  <p><b>NOTE:</b> The [edit system configuration] hierarchy is not available on QFabric systems.</p> </div>
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">request system configuration rescue save on page 330</a></li> <li>• <a href="#">request system software rollback on page 370</a></li> <li>• <a href="#">show system commit on page 884</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">request system configuration rescue delete on page 329</a>
<b>Output Fields</b>	This command produces no output.

### Sample Output


```
request system
configuration rescue
delete
```

```
user@host> request system configuration rescue delete
```



## request system configuration rescue save

---

<b>Syntax</b>	request system configuration rescue save
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Save the most recently committed configuration as the rescue configuration so that you can return to it at any time by using the <b>rollback</b> command.
	<div><div><b>NOTE:</b> The [edit system configuration] hierarchy is not available on QFabric systems.</div></div>
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">request system software delete on page 358</a></li><li>• <a href="#">request system software rollback on page 370</a></li><li>• <a href="#">show system commit on page 884</a></li></ul>
<b>List of Sample Output</b>	<a href="#">request system configuration rescue save on page 330</a>
<b>Output Fields</b>	This command produces no output.

### Sample Output

<code>request system configuration rescue save</code>	<code>user@host&gt; request system configuration rescue save</code>
---	---



## request system halt

<b>Syntax</b>	request system halt <at <i>time</i> > <both-routing-engines> <other-routing-engine> <in <i>minutes</i> > <media (compact-flash   disk   removable-compact-flash   usb)> <message " <i>text</i> ">
<b>Syntax (EX Series Switches)</b>	request system halt <all-members> <at <i>time</i> > <both-routing-engines> <in <i>minutes</i> > <local> <media (external   internal)> <member <i>member-id</i> > <message " <i>text</i> "> <other-routing-engine> <slice <i>slice</i> >
<b>Syntax (PTX Series)</b>	request system halt <at <i>time</i> > <both-routing-engines> <other-routing-engine> <in <i>minutes</i> > <media (compact-flash   disk)> <message " <i>text</i> ">
<b>Syntax (TX Matrix Router)</b>	request system halt <all-lcc   lcc <i>number</i>   scc> <at <i>time</i> > <both-routing-engines> <other-routing-engine> <in <i>minutes</i> > <media (compact-flash   disk)> <message " <i>text</i> ">
<b>Syntax (TX Matrix Plus Router)</b>	request system halt <all-chassis   all-lcc   lcc <i>number</i>   sfc <i>number</i> > <at <i>time</i> > <both-routing-engines> <other-routing-engine> <in <i>minutes</i> > <media (compact-flash   disk)> <message " <i>text</i> ">
<b>Syntax (MX Series Router)</b>	request system halt <all-members> <at <i>time</i> > <both-routing-engines> <in <i>minutes</i> >



	<pre>&lt;local&gt; &lt;media (external   internal)&gt; &lt;member <i>member-id</i>&gt; &lt;message "text"&gt; &lt;other-routing-engine&gt;</pre>
<b>Syntax (QFX Series)</b>	<pre>request system halt &lt;all-members&gt; &lt;at <i>time</i>&gt; &lt;director-device <i>director-device-id</i>&gt; &lt;in <i>minutes</i>&gt; &lt;local&gt; &lt;media &gt; &lt;member <i>member-id</i>&gt; &lt;message "text"&gt; &lt;slice <i>slice</i>&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p><b>other-routing-engine</b> option introduced in Junos OS Release 8.0.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p> <p><b>director-device</b> option introduced for QFabric systems in Junos OS Release 12.2.</p>
<b>Description</b>	Stop the router or switch software.



**NOTE:** When you issue this command on an individual component in a QFabric system, you will receive a warning that says “Hardware-based members will halt, Virtual Junos Routing Engines will reboot.” If you want to halt only one member of a Node group, use the **member** option from the Node group CLI. You cannot issue this command from the QFabric CLI.

<b>Options</b>	<p><b>none</b>—Stop the router or switch software immediately.</p> <p><b>all-chassis</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) Halt all chassis.</p> <p><b>all-lcc</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, halt all T640 routers (or line-card chassis) connected to the TX Matrix router. On a TX Matrix Plus router, halt all T1600 routers (or line-card chassis) connected to the TX Matrix Plus router.</p> <p><b>all-members</b>—(EX4200 switches and MX Series routers only) (Optional) Halt all members of the Virtual Chassis configuration.</p> <p><b>at <i>time</i></b> —(Optional) Time at which to stop the software, specified in one of the following ways:</p> <ul style="list-style-type: none"><li>• <b>now</b>—Stop the software immediately. This is the default.</li><li>• <b>+<i>minutes</i></b>—Number of minutes from now to stop the software.</li></ul>
----------------	--



- **yymmddhhmm**—Absolute time at which to stop the software, specified as year, month, day, hour, and minute.
- **hh:mm**—Absolute time on the current day at which to stop the software.

**both-routing-engines**—(Optional) Halt both Routing Engines at the same time.

**director-device *director-device-id***—(QFabric systems only) Halt a specific Director device.

**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, halt a specific T640 router that is connected to the TX Matrix router. On a TX Matrix Plus router, halt a specific T1600 router that is connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.

**local**—(EX4200 switches and MX Series routers only) (Optional) Halt the local Virtual Chassis member.

**in *minutes***—(Optional) Number of minutes from now to stop the software. This option is an alias for the **at +*minutes*** option.

**media (compact-flash | disk | removable-compact-flash | usb)**—(Optional) Boot medium for the next boot. (The options **removable-compact-flash** and **usb** pertain to J Series routers only.)

**media (external | internal)**—(EX Series and QFX Series switches and MX Series routers only) (Optional) Halt the boot media:

- **external**—Halt the external mass storage device.
- **internal**—Halt the internal flash device.

**member *member-id***—(EX4200 switches and MX Series routers only) (Optional) Halt the specified member of the Virtual Chassis configuration. For EX4200 switches, replace ***member-id*** with a value from 0 through 9. For an MX Series Virtual Chassis, replace ***member-id*** with a value of 0 or 1.

**message "*text*"**—(Optional) Message to display to all system users before stopping the software.

**other-routing-engine**—(Optional) Halt the other Routing Engine from which the command is issued. For example, if you issue the command from the master Routing Engine, the backup Routing Engine is halted. Similarly, if you issue the command from the backup Routing Engine, the master Routing Engine is halted.

**scc**—(TX Matrix routers only) (Optional) Halt the TX Matrix router (or switch-card chassis).

**sfc *number***—(TX Matrix Plus routers only) (Optional) Halt the TX Matrix Plus router (or switch-fabric chassis). Replace ***number*** with 0.

**slice *slice***—(EX Series and QFX Series switches only) (Optional) Halt a partition on the boot media. This option has the following suboptions:

- 1—Halt partition 1.



- 2—Halt partition 2.
- **alternate**—Reboot from the alternate partition.

**Additional Information** On the M7i router, the **request system halt** command does not immediately power down the Packet Forwarding Engine. The power-down process can take as long as 5 minutes.

On a TX Matrix or TX Matrix Plus router, if you issue the **request system halt** command on the master Routing Engine, all the master Routing Engines connected to the routing matrix are halted. If you issue this command on the backup Routing Engine, all the backup Routing Engines connected to the routing matrix are halted. If you issue the **request system halt both-routing-engines** command on the TX Matrix or TX Matrix Plus router, all the Routing Engines on the routing matrix are halted.



.....

**NOTE:** If you have a router or switch with two Routing Engines and you want to shut the power off to the router or switch or remove a Routing Engine, you must first halt the backup Routing Engine (if it has been upgraded), and then halt the master Routing Engine. To halt a Routing Engine, issue the **request system halt** command. You can also halt both Routing Engines at the same time by issuing the **request system halt both-routing-engines** command.

.....

**Required Privilege Level** maintenance

**Related Documentation**

- [clear system reboot on page 290](#)
- [request system power-off on page 340](#)
- [Rebooting and Halting a QFX Series Product on page 147](#)

**List of Sample Output**

- [request system halt on page 335](#)
- [request system halt \(In 2 Hours\) on page 335](#)
- [request system halt \(Immediately\) on page 335](#)
- [request system halt \(At 1:20 AM\) on page 335](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request.



## Sample Output

### request system halt

```
user@host> request system halt
Halt the system ? [yes,no] (no) yes

*** FINAL System shutdown message from root@section2 ***
System going down IMMEDIATELY
Terminated
...
syncing disks... 11 8 done
The operating system has halted.
Please press any key to reboot.
```

### request system halt (In 2 Hours)

The following example, which assumes that the time is 5 PM (1700), illustrates three different ways to request that the system stop 2 hours from now:

```
user@host> request system halt at +120
user@host> request system halt in 120
user@host> request system halt at 19:00
```

### request system halt (Immediately)

```
user@host> request system halt at now
```

### request system halt (At 1:20 AM)

To stop the system at 1:20 AM, enter the following command. Because 1:20 AM is the next day, you must specify the absolute time.

```
user@host> request system halt at yymmdd120
request system halt at 120
Halt the system at 120? [yes,no] (no) yes
```



## request system license add

---

<b>Syntax</b>	<code>request system license add (<i>filename</i>   terminal)</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Add a license key.
<b>Options</b>	<b><i>filename</i></b> —License key from a file or URL. Specify the filename or the URL where the key is located.  <b><i>terminal</i></b> —License key from the terminal.
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Adding New Licenses (CLI Procedure) on page 69</a></li></ul>
<b>List of Sample Output</b>	<a href="#">request system license add on page 336</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

```
request system license add user@host> request system license add terminal
```



## request system license delete

<b>Syntax</b>	<code>request system license delete <i>license-id</i></code>
<b>Syntax (QFX Series)</b>	<code>request system license delete <i>license-identifier</i></code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Delete a license key. You can delete only one license at a time.
<b>Options</b>	<i>license-id</i> —License ID that uniquely identifies a license key. <i>license-identification</i> —(QFX Series) License ID that uniquely identifies a license key.
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Deleting a License (CLI Procedure) on page 70</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">request system license delete on page 337</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

```
request system license delete user@host> request system license delete G03000002223
```



## request system license save

---

<b>Syntax</b>	<code>request system license save (<i>filename</i>   terminal)</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Save installed license keys to a file or URL.
<b>Options</b>	<b><i>filename</i></b> —License key from a file or URL. Specify the filename or the URL where the key is located.  <b><i>terminal</i></b> —License key from the terminal.
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Saving License Keys on page 71</a></li></ul>
<b>List of Sample Output</b>	<a href="#">request system license save on page 338</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

`request system license save`     `user@host> request system license save ftp://user@host/license.conf`



## request system logout

<b>Syntax</b>	<code>request system logout (pid <i>pid</i>   terminal <i>terminal</i>   user <i>username</i>)</code> <code>&lt;all&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Log out users from the router or switch and the configuration database. If a user held the <b>configure exclusive</b> lock, this command clears the exclusive lock.
<b>Options</b>	<p><b>all</b>—(Optional) Log out all sessions owned by a particular PID, terminal session, or user. (On a TX Matrix or TX Matrix Plus router, this command is broadcast to all chassis.)</p> <p><b>pid <i>pid</i></b>—Log out the user session using the specified management process identifier (PID). The PID type must be management process.</p> <p><b>terminal <i>terminal</i></b>—Log out the user for the specified terminal session.</p> <p><b>user <i>username</i></b>—Log out the specified user.</p>
<b>Required Privilege Level</b>	configure
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Junos OS System Basics Configuration Guide</li> </ul>
<b>List of Sample Output</b>	<a href="#">request system logout on page 339</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

`request system logout`     `user@host> request system logout user tammy all`  
 Connection closed by foreign host.



## request system power-off

---

<b>Syntax</b>	request system power-off <both-routing-engines> <other-routing-engine> <at <i>time</i> > <in <i>minutes</i> > <media (compact-flash   disk   removable-compact-flash   usb)> <message " <i>text</i> ">
<b>Syntax (EX Series Switches)</b>	request system power-off <all-members> <at <i>time</i> > <both-routing-engines> <in <i>minutes</i> > <local> <media (external   internal)> <member <i>member-id</i> > <message " <i>text</i> "> <other-routing-engine> <slice <i>slice</i> >
<b>Syntax (TX Matrix Router)</b>	request system power-off <all-chassis   all-lcc   lcc <i>number</i>   scc> <both-routing-engines> <other-routing-engine> <at <i>time</i> > <in <i>minutes</i> > <media (compact-flash   disk)> <message " <i>text</i> ">
<b>Syntax (TX Matrix Plus Router)</b>	request system power-off <all-chassis   all-lcc   lcc <i>number</i>   sfc <i>number</i> > <both-routing-engines> <other-routing-engine> <at <i>time</i> > <in <i>minutes</i> > <media (compact-flash   disk)> <message " <i>text</i> ">
<b>Syntax (MX Series Router)</b>	request system power-off <all-members> <at <i>time</i> > <both-routing-engines> <in <i>minutes</i> > <local> <media (external   internal)> <member <i>member-id</i> > <message " <i>text</i> "> <other-routing-engine>
<b>Syntax (QFX Series)</b>	request system power-off <at <i>time</i> >



```
<in minutes>
<media (external | internal)>
<message "text">
<slice slice>
```

**Release Information** Command introduced in Junos OS Release 8.0.  
 Command introduced in Junos OS Release 9.0 for EX Series switches.  
 Command introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Power off the software.



**NOTE:** When you issue this command on an individual component in a QFabric system, you will receive a warning that says “Hardware-based members will halt, Virtual Junos Routing Engines will reboot.” If you want to halt only one member, use the **member** option. You cannot issue this command from the QFabric CLI.

**Options** **none**—Power off the router or switch software immediately.

**all-chassis**—(Optional) (TX Matrix and TX Matrix Plus router only) Power off all Routing Engines in the chassis.

**all-lcc**—(Optional) (TX Matrix and TX Matrix Plus router only) On a TX Matrix router, power off all T640 routers (or line-card chassis) connected to the TX Matrix router. On a TX Matrix Plus router, power off all T1600 routers (or line-card chassis) connected to the TX Matrix Plus router.

**all-members**—(EX4200 switches and MX Series routers only) (Optional) Power off all members of the Virtual Chassis configuration.

**at time**—(Optional) Time at which to power off the software, specified in one of the following ways:

- **now**—Power off the software immediately. This is the default.
- **+minutes**—Number of minutes from now to power off the software.
- **yymmddhhmm**—Absolute time at which to power off the software, specified as year, month, day, hour, and minute.
- **hh:mm**—Absolute time on the current day at which to power off the software.

**both-routing-engines**—(Optional) Power off both Routing Engines at the same time.

**in minutes**—(Optional) Number of minutes from now to power off the software. This option is an alias for the **at +minutes** option.

**lcc number**—(Optional) (TX Matrix and TX Matrix Plus router only) On a TX Matrix router, power off a T640 router that is connected to the TX Matrix router. On a TX Matrix Plus router, power off a T1600 router that is connected to the TX Matrix Plus router. Replace **number** with a value from 0 through 3.



**local**—(EX4200 switches and MX Series routers only) (Optional) Power off the local Virtual Chassis member.

**media (compact-flash | disk | removable-compact-flash | usb)**—(Optional) Boot medium for the next boot. (The options **removable-compact-flash** and **usb** pertain to the J Series routers only.)

**media (external | internal)**—(EX Series and QFX Series switches and MX Series routers only) (Optional) Power off the boot media:

- **external**—Power off the external mass storage device.
- **internal**—Power off the internal flash device.

**member *member-id***—(EX4200 switches and MX Series routers only) (Optional) Power off the specified member of the Virtual Chassis configuration. For EX4200 switches, replace ***member-id*** with a value from 0 through 9. For an MX Series Virtual Chassis, replace ***member-id*** with a value of 0 or 1.

**message "*text*"**—(Optional) Message to display to all system users before powering off the software.

**other-routing-engine**—(Optional) Power off the other Routing Engine from which the command is issued. For example, if you issue the command from the master Routing Engine, the backup Routing Engine is halted. Similarly, if you issue the command from the backup Routing Engine, the master Routing Engine is halted.

**scc**—(Optional) (TX Matrix router only) Power off only the master Routing Engine or the backup Routing Engine on the TX Matrix router (or switch-card chassis). If you issue the command from the master Routing Engine, the master SCC is powered off. If you issue the command from the backup Routing Engine, the backup SCC is powered off.

**sfc *number***—(Optional) (TX Matrix Plus router only) Power off only the master Routing Engine or the backup Routing Engine on the TX Matrix Plus router (or switch-fabric chassis). If you issue the command from the master Routing Engine, the master SFC is powered off. If you issue the command from the backup Routing Engine, the backup SFC is powered off. Replace ***number*** with zero.

**slice *slice***—(EX Series and QFX Series switches only) (Optional) Power off a partition on the boot media. This option has the following suboptions:

- **1**—Power off partition 1.
- **2**—Power off partition 2.
- **alternate**—Reboot from the alternate partition.

**Additional Information** On a routing matrix composed of a TX Matrix router and T640 routers, if you issue the **request system power-off** command on the TX Matrix master Routing Engine, all the master Routing Engines connected to the routing matrix are powered off. If you issue this command on the backup Routing Engine, all the backup Routing Engines connected to the routing matrix are powered off.



Likewise, on a routing matrix composed of a TX Matrix Plus router and T1600 routers, if you issue the **request system power-off** command on the TX Matrix Plus master Routing Engine, all the master Routing Engines connected to the routing matrix are powered off. If you issue this command on the backup Routing Engine, all the backup Routing Engines connected to the routing matrix are powered off.

If you issue the **request system power-off both-routing-engines** command on the TX Matrix or TX Matrix Plus router, all the Routing Engines on the routing matrix are powered off.

Required Privilege Level	maintenance
List of Sample Output	<a href="#">request system power-off on page 343</a>
Output Fields	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

### `request system power-off`

```
user@host> request system power-off message "This router will be powered off in 30 minutes.
Please save your data and log out immediately."
warning: This command will not halt the other routing-engine.
If planning to switch off power, use the both-routing-engines option.
Power Off the system ? [yes,no] (no) yes

*** FINAL System shutdown message from remote@nutmeg ***
System going down IMMEDIATELY

This router will be powered off in 30 minutes. Please save your data and log out
immediately.

Shutdown NOW!
[pid 5177]
```



## request system reboot

---

<b>Syntax</b>	<code>request system reboot</code> <code>&lt;at time&gt;</code> <code>&lt;in minutes&gt;</code> <code>&lt;media (external   internal)&gt;</code> <code>&lt;message "text"&gt;</code> <code>&lt;routing-engine&gt;</code>
<b>Syntax (QFX Series)</b>	<code>request system reboot</code> <code>&lt;all &lt;graceful&gt;&gt;</code> <code>&lt;at time&gt;</code> <code>&lt;director-group &lt;graceful&gt;&gt;</code> <code>&lt;fabric &lt;graceful&gt;&gt;</code> <code>&lt;in minutes&gt;</code> <code>&lt;media &gt;</code> <code>&lt;message "text"&gt;</code> <code>&lt;node-group <i>name</i>&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Reboot the Junos OS.



**NOTE:** On a QFabric system, to avoid traffic loss on the network Node group, switch mastership of the routing engine to the backup routing engine, and then reboot.

Reboot requests are recorded in the system log files, which you can view with the **show log** command. You can view the process names with the **show system processes** command.

- Options**
- none**—Reboots the software immediately.
  - all**—(QFabric Systems Only) (Optional) Reboots the software on the Director group, fabric control Routing Engines, fabric manager Routing Engines, Interconnect devices, and network and server Node groups.
  - at time**—(Optional) Time at which to reboot the software, specified in one of the following ways:
    - **+minutes**—Number of minutes from now to reboot the software.
    - **hh:mm**—Absolute time on the current day at which to reboot the software, specified in 24-hour time.
    - **now**—Stop or reboot the software immediately. This is the default.
    - **yymmddhhmm**—Absolute time at which to reboot the software, specified as year, month, day, hour, and minute.



**director-group**—(QFabric Systems Only) (Optional) Reboots the software on the Director group and the default partition (QFabric CLI).

**fabric**—(QFabric Systems only) (Optional) Reboots the fabric control Routing Engines and the Interconnect devices.

**graceful**—(QFabric Systems only) (Optional) Allows the QFabric component to reboot with minimal impact to network traffic. This option is only available for the **all**, **fabric**, and **director-group** options.

**in minutes**—(Optional) Number of minutes from now to reboot the software. This option is an alias for the **at +minutes** option.

**media (external | internal)**—(Optional) Boot medium for the next boot. The external option reboots the switch using a software package stored on an external boot source, such as a USB flash drive. The internal option reboots the switch using a software package stored in an internal memory source.

**message "text"**—(Optional) Message to display to all system users before rebooting the software.

**node-group *name***—(QFabric systems only) (Optional) Reboots the software on a server Node group or a network Node group.

**routing-engine**—(Optional) Reboot the Routing Engine.

**Required Privilege Level** maintenance

**Related Documentation**

- [clear system reboot on page 290](#)
- [Rebooting and Halting a QFX Series Product on page 147](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request.



## Sample Output

**request system reboot**     user@switch> **request system reboot**  
Reboot the system ? [yes,no] (no)

**request system reboot**     user@switch> **request system reboot at 2300 message ?Maintenance time!?**  
**(At 2300)**                    Reboot the system ? [yes,no] (no) **yes**  
  
shutdown: [pid 186]  
\*\*\* System shutdown message from root@berry.network.net \*\*\*  
System going down at 23:00

**request system reboot**     The following example, which assumes that the time is 5 PM (1700), illustrates three  
**(In 2 Hours)**                different ways to request the system to reboot in 2 hours:

```
user@switch> request system reboot at +120
user@switch> request system reboot in 120
user@switch> request system reboot at 19:00
```

**request system reboot**     user@switch> **request system reboot at now**  
**(Immediately)**

**request system reboot**     To reboot the system at 1:20 AM, enter the following command. Because 1:20 AM is the  
**(At 1:20 AM)**                next day, you must specify the absolute time.

```
user@switch> request system reboot at 06060120
request system reboot at 120
Reboot the system at 120? [yes,no] (no) yes
```



## request system snapshot

<b>Syntax</b>	<code>request system snapshot</code> <code>&lt;partition&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Copy the currently running Junos OS and configuration to alternate media. This command takes a snapshot of the contents of the <code>/</code> (root), and <code>/var</code> partitions on the media used to boot the switch and then copies the snapshot to alternate media. If the switch was booted from internal flash memory, the snapshot is copied to an external USB flash drive. If the switch was booted from an external USB flash drive, the snapshot is copied to internal flash memory.
<b>Options</b>	<p><b>none</b>—Create a snapshot on the alternate media—that is, the external media if you booted the switch using software stored on internal media or internal media if you booted the switch using software stored on external media.</p> <p><b>partition</b>—Partition the destination media before copying over the snapshot.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• show system snapshot</li> <li>• <a href="#">Creating a Snapshot and Using It to Boot a QFX Series Switch on page 141</a></li> <li>• Verifying That a System Snapshot Was Created on a QFX Series Switch</li> </ul>
<b>List of Sample Output</b>	<a href="#">request system snapshot partition on page 347</a>

### Sample Output

```
request system snapshot partition
user@switch> request system snapshot partition
Clearing current label...
Partitioning external media (da1) ...
Verifying compatibility of destination media partitions...
Running newfs (334MB) on external media / partition ...
Running newfs (404MB) on external media /config partition ...
Running newfs (222MB) on external media /var partition ...
Copying '/dev/da0s2a' to '/dev/da1s1a' .. (this may take a few minutes)
Copying '/dev/da0s3e' to '/dev/da1s3e' .. (this may take a few minutes)
Copying '/dev/da0s2f' to '/dev/da1s1f' .. (this may take a few minutes)
The following filesystems were archived: / /config /var
```



## request system software add

---

<b>Syntax</b>	<code>request system software add <i>package-name</i></code> <code>&lt;best-effort-load&gt;</code> <code>&lt;delay-restart&gt;</code> <code>&lt;force&gt;</code> <code>&lt;no-copy&gt;</code> <code>&lt;no-validate&gt;</code> <code>&lt;re0   re1&gt;</code> <code>&lt;reboot&gt;</code> <code>&lt;set [<i>package-name package-name</i>]&gt;</code> <code>&lt;unlink&gt;</code> <code>&lt;validate&gt;</code>
<b>Syntax (EX Series Switches)</b>	<code>request system software add <i>package-name</i></code> <code>&lt;best-effort-load&gt;</code> <code>&lt;delay-restart&gt;</code> <code>&lt;force&gt;</code> <code>&lt;no-copy&gt;</code> <code>&lt;no-validate&gt;</code> <code>&lt;re0   re1&gt;</code> <code>&lt;reboot&gt;</code> <code>&lt;set [<i>package-name package-name</i>]&gt;</code> <code>&lt;validate&gt;</code>
<b>Syntax (TX Matrix Router)</b>	<code>request system software add <i>package-name</i></code> <code>&lt;best-effort-load&gt;</code> <code>&lt;delay-restart&gt;</code> <code>&lt;force&gt;</code> <code>&lt;lcc <i>number</i>   scc&gt;</code> <code>&lt;no-copy&gt;</code> <code>&lt;no-validate&gt;</code> <code>&lt;re0   re1&gt;</code> <code>&lt;reboot&gt;</code> <code>&lt;set [<i>package-name package-name</i>]&gt;</code> <code>&lt;unlink&gt;</code> <code>&lt;validate&gt;</code>
<b>Syntax (TX Matrix Plus Router)</b>	<code>request system software add <i>package-name</i></code> <code>&lt;best-effort-load&gt;</code> <code>&lt;delay-restart&gt;</code> <code>&lt;force&gt;</code> <code>&lt;lcc <i>number</i>   sfc <i>number</i>&gt;</code> <code>&lt;no-copy&gt;</code> <code>&lt;no-validate&gt;</code> <code>&lt;re0   re1&gt;</code> <code>&lt;reboot&gt;</code> <code>&lt;set [<i>package-name package-name</i>]&gt;</code> <code>&lt;unlink&gt;</code> <code>&lt;validate&gt;</code>
<b>Syntax (MX Series Router)</b>	<code>request system software add <i>package-name</i></code> <code>&lt;best-effort-load&gt;</code> <code>&lt;delay-restart&gt;</code>



```

<force>
<member member-id>
<no-copy>
<no-validate>
<re0 | re1>
<reboot>
<set [package-name package-name]>
<unlink>
<validate>

```

**Syntax (QFX Series)** `request system software add package-name`

```

<best-effort-load>
<component all>
<delay-restart>
<force>
<no-copy>
<no-validate>
<partition>
<reboot>
<unlink>
<validate>

```

**Release Information** Command introduced before Junos OS Release 7.4.  
**best-effort-load** and **unlink** options added in Junos OS Release 7.4.  
 Command introduced in Junos OS Release 9.0 for EX Series switches.  
**sfc** option introduced for the TX Matrix Plus router in Junos OS Release 9.6.  
 Command introduced in Junos OS Release 11.1 for the QFX Series.  
**set [*package-name package-name*]** option added in Junos OS Release 11.1 for EX Series switches.  
**set [*package-name package-name*]** option added in Junos OS Release 12.2 for M Series, MX Series, T Series routers, and Branch SRX Series Services Gateways.



**NOTE:** On EX Series switches, the **set [*package-name package-name*]** option allows you to install only two software packages on a mixed EX4200 and EX4500 Virtual Chassis, whereas, on M Series, MX Series, T Series routers, and Branch SRX Series Services Gateways, the **set [*package-name package-name*]** option allows you to install multiple software packages and software add-on packages at the same time.

**Description** Install a software package or bundle on the router or switch.

**Options** ***package-name***—Location from which the software package or bundle is to be installed.  
 For example:

- ***/var/tmp/package-name***—For a software package or bundle that is being installed from a local directory on the router or switch.
- ***protocol://hostname/pathname/package-name***—For a software package or bundle that is to be downloaded and installed from a remote location. Replace ***protocol*** with one of the following:



- **ftp**—File Transfer Protocol.  
Use **ftp://hostname/pathname/package-name**. To specify authentication credentials, use **ftp://<username>:<password>@hostname/pathname/package-name**. To have the system prompt you for the password, specify **prompt** in place of the password. If a password is required, and you do not specify the password or **prompt**, an error message is displayed.
- **http**—Hypertext Transfer Protocol.  
Use **http://hostname/pathname/package-name**. To specify authentication credentials, use **http://<username>:<password>@hostname/pathname/package-name**. If a password is required and you omit it, you are prompted for it.
- **scp**—Secure copy (available only for Canada and U.S. version).  
Use **scp://hostname/pathname/package-name**. To specify authentication credentials, use **scp://<username>:<password>@hostname/pathname/package-name**.



---

**NOTE:**

- The **pathname** in the protocol is the relative path to the user's home directory on the remote system and not the root directory.
- Do not use the **scp** protocol in the request system software add command to download and install a software package or bundle from a remote location. The previous statement does not apply to the QFabric switch. The software upgrade is handled by the MGD process which does not support **scp**.  
Use the file copy command to copy the software package or bundle from the remote location to the **/var/tmp** directory on the hard disk:  
**file copy scp://source/package-name /var/tmp**  
Then install the software package or bundle using the request system software add command:  
**request system software add /var/tmp/package-name**
- On a J Series Services Router, when you install the software from a remote location, the package is removed at the earliest opportunity in order to make room for the installation to be completed. If you copy the software to a local directory on the router and then install the new package, use the **unlink** option to achieve the same effect and allow the installation to be completed.

---

**best-effort-load**—(Optional) Activate a partial load and treat parsing errors as warnings instead of errors.

**component all**—(QFabric systems only) (Optional) Install software package on all of the QFabric components.



**delay-restart**—(Optional) Install a software package or bundle, but do not restart software processes.

**force**—(Optional) Force the addition of the software package or bundle (ignore warnings).

**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) In a routing matrix based on the TX Matrix router, install a software package or bundle on a T640 router (or line-card chassis) that is connected to the TX Matrix router. In a routing matrix based on the TX Matrix Plus router, install a software package or bundle on a T1600 router (or line-card chassis) that is connected to the TX Matrix Plus router. Replace *number* with a value from 0 through 3.

**member *member-id***—(MX Series routers only) (Optional) Install a software package on the specified Virtual Chassis member. Replace *member-id* with a value of 0 or 1.

**partition**—(QFX3500 switches only) (Optional) Format and repartition the media before installation.

**scc**—(TX Matrix routers only) (Optional) Install a software package or bundle on a Routing Engine on a TX Matrix router (or switch-card chassis).

**sfc *number***—(TX Matrix Plus routers only) (Optional) Install a software package or bundle on a Routing Engine on a TX Matrix Plus router (or switch-fabric chassis). Replace *number* with 0.

**no-copy**—(Optional) Install a software package or bundle, but do not save copies of the package or bundle files.

**no-validate**—(Optional) When loading a software package or bundle with a different release, suppress the default behavior of the **validate** option.

**re0 | re1**—(Optional) On routers or switches that support dual or redundant Routing Engines, load a software package or bundle on the Routing Engine in slot 0 (**re0**) or the Routing Engine in slot 1 (**re1**).

**reboot**—(Optional) After adding the software package or bundle, reboot the system. On a QFabric switch, the software installation is not complete until you reboot the component for which you have installed the software.

**set [*package-name package-name*]**—(Mixed EX4200 and EX4500 Virtual Chassis only) (Optional) Install two software packages—a package for an EX4200 switch and the same release of the package for an EX4500 switch—to upgrade all member switches in a mixed EX4200 and EX4500 Virtual Chassis.

**set [*package-name package-name*]**—(M Series, MX Series, T Series routers, and Branch SRX Series Services Gateways only) (Optional) Install multiple software packages and software add-on packages at the same time.

**unlink**—(Optional) On J Series Services Routers, this option ensures that the software package is removed at the earliest opportunity in order to make room for the installation to be completed. On M Series, T Series, and MX Series routers, use the



**unlink** option to remove the software package from this directory after a successful upgrade is completed.

**validate**—(Optional) Validate the software package or bundle against the current configuration as a prerequisite to adding the software package or bundle. This is the default behavior when the software package or bundle being added is a different release.

#### Additional Information



**NOTE:** The **request system snapshot** command is currently not supported on the QFabric system. Also, you cannot add or install multiple packages on a QFabric system.

Before upgrading the software on the router or switch, when you have a known stable system, issue the **request system snapshot** command to back up the software, including the configuration, to the **/altroot** and **/altconfig** file systems. After you have upgraded the software on the router or switch and are satisfied that the new package or bundle is successfully installed and running, issue the **request system snapshot** command again to back up the new software to the **/altroot** and **/altconfig** file systems.

After you run the **request system snapshot** command, you cannot return to the previous version of the software, because the running and backup copies of the software are identical.

If you are upgrading more than one package at the same time, delete the operating system package, **jkern**el, last. Add the operating system package, **jkern**el, first and the routing software package, **jroute**, last. If you are upgrading all packages at once, delete and add them in the following order:

```
user@host> request system software add /var/tmp/jbase
user@host> request system software add /var/tmp/jkernel
user@host> request system software add /var/tmp/jpfe
user@host> request system software add /var/tmp/jdocs
user@host> request system software add /var/tmp/jroute
user@host> request system software add /var/tmp/jcrypto
```

By default, when you issue the **request system software add package-name** command on a TX Matrix master Routing Engine, all the T640 master Routing Engines that are connected to it are upgraded to the same version of software. If you issue the same command on the TX Matrix backup Routing Engine, all the T640 backup Routing Engines that are connected to it are upgraded to the same version of software.

Likewise, when you issue the **request system software add package-name** command on a TX Matrix Plus master Routing Engine, all the T1600 master Routing Engines that are connected to it are upgraded to the same version of software. If you issue the same command on the TX Matrix Plus backup Routing Engine, all the T1600 backup Routing Engines that are connected to it are upgraded to the same version of software.

**Required Privilege Level**    maintenance



<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">request system software delete on page 358</a></li><li>• <a href="#">request system software rollback on page 370</a></li><li>• <a href="#">request system storage cleanup on page 377</a></li><li>• <a href="#">Upgrading Software on QFX3500 and QFX3600 Standalone Switches on page 107</a></li><li>• <a href="#">Upgrading Software on a QFabric System on page 109</a></li></ul>
<b>List of Sample Output</b>	<a href="#">request system software add validate on page 354</a> <a href="#">request system software add (Mixed EX4200 and EX4500 Virtual Chassis) on page 354</a> <a href="#">request system software add component all (QFabric Systems) on page 354</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.



## Sample Output

request system  
software add validate

```
user@host> request system software add validate /var/tmp/jinstall-7.2R1.7-domestic-signed.tgz
Checking compatibility with configuration
Initializing...
Using jbase-7.1R2.2
Using /var/tmp/jinstall-7.2R1.7-domestic-signed.tgz
Verified jinstall-7.2R1.7-domestic.tgz signed by PackageProduction_7_2_0
Using /var/validate/tmp/jinstall-signed/jinstall-7.2R1.7-domestic.tgz
Using /var/validate/tmp/jinstall/jbundle-7.2R1.7-domestic.tgz
Checking jbundle requirements on /
Using /var/validate/tmp/jbundle/jbase-7.2R1.7.tgz
Using /var/validate/tmp/jbundle/jkernel-7.2R1.7.tgz
Using /var/validate/tmp/jbundle/jcrypto-7.2R1.7.tgz
Using /var/validate/tmp/jbundle/jpfe-7.2R1.7.tgz
Using /var/validate/tmp/jbundle/jdocs-7.2R1.7.tgz
Using /var/validate/tmp/jbundle/jroute-7.2R1.7.tgz
Validating against /config/juniper.conf.gz
mgd: commit complete
Validation succeeded
Validating against /config/rescue.conf.gz
mgd: commit complete
Validation succeeded
Installing package '/var/tmp/jinstall-7.2R1.7-domestic-signed.tgz' ...
Verified jinstall-7.2R1.7-domestic.tgz signed by PackageProduction_7_2_0
Adding jinstall...

WARNING: This package will load JUNOS 7.2R1.7 software.
WARNING: It will save JUNOS configuration files, and SSH keys
WARNING: (if configured), but erase all other files and information
WARNING: stored on this machine. It will attempt to preserve dumps
WARNING: and log files, but this can not be guaranteed. This is the
WARNING: pre-installation stage and all the software is loaded when
WARNING: you reboot the system.

Saving the config files ...
Installing the bootstrap installer ...

WARNING: A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING: 'request system reboot' command when software installation is
WARNING: complete. To abort the installation, do not reboot your system,
WARNING: instead use the 'request system software delete jinstall'
WARNING: command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall-7.2R1.7-domestic-signed.tgz ...
Saving state for rollback ...
```

## Sample Output

request system  
software add (Mixed  
EX4200 and EX4500  
Virtual Chassis)

```
user@switch> request system software add set
[/var/tmp/jinstall-ex-4200-11.1R1.1-domestic-signed.tgz
/var/tmp/jinstall-ex-4500-11.1R1.1-domestic-signed.tgz]
...
```

request system  
software add

```
user@switch> request system software add /pbdata/packages/jinstall-qfabric-12.2X50-D1.3.rpm
component all
...
```



component all  
(QFabric Systems)



## request system software configuration-backup

---

<b>Syntax</b>	request system software configuration-backup ( <i>path</i> )
<b>Release Information</b>	Command introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Save the currently active configuration and any installation-specific parameters such as a configuration that you have entered outside of the CLI, Director group IP addresses, and the default partition IP address.
<b>Options</b>	<b>path</b> —(QFabric System) Provide the path to the location of the backup configuration files. You can save the backup configuration files to either a URL, local directory, remote server, or removable drive.
<b>Required Privilege Level</b>	configure—To enter configuration mode, but other required privilege levels depend on where the statement is located in the configuration hierarchy.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">request system software configuration-restore on page 357</a></li><li>• <a href="#">Performing a QFabric System Recovery Installation on the Director Group on page 87</a></li></ul>
<b>List of Sample Output</b>	<a href="#">request system software configuration-backup on page 356</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

```
request system software configuration-backup
user@switch request system software configuration-backup ftp://ftp.test.net/test
% Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
                               Dload  Upload  Total   Spent    Left
Speed
100      4035    0    0    100 4035    0    138k  --:--:-- --:--:-- --:--:--
0
```



## request system software configuration-restore

<b>Syntax</b>	request system software configuration-restore ( <i>path</i> )
<b>Release Information</b>	Command introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Restore a previously saved configuration and any installation-specific parameters, such as a configuration that you have entered outside of the CLI, Director group IP addresses, and the default partition IP address.
<b>Options</b>	<b>path</b> —(QFabric System) Provide the path to the location of the backup configuration files. The path can be to a local file, a file on an external flash drive, or an SCP or FTP destination.
<b>Required Privilege Level</b>	configure—To enter configuration mode, but other required privilege levels depend on where the statement is located in the configuration hierarchy.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">request system software configuration-backup on page 356</a></li> <li>• <a href="#">Performing a QFabric System Recovery Installation on the Director Group on page 87</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">request system software configuration-restore on page 357</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

```

request system software configuration-restore
user@switch request system software configuration-restore ftp://ftp.test.net/test
% Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
           Dload  Upload   Total     Spent    Left     Speed
100  4035  100  4035    0     0   153k      0  --:--:--  --:--:--  --:--:-- 3803k

```



## request system software delete

---

<b>Syntax</b>	<code>request system software delete <i>software-package</i></code> <code>&lt;force&gt;</code> <code>&lt;reboot&gt;</code> <code>&lt;set [<i>package-name package-name</i>]&gt;</code>
<b>Syntax (TX Matrix Router)</b>	<code>request system software delete <i>software-package</i></code> <code>&lt;force&gt;</code> <code>&lt;lcc <i>number</i>   scc&gt;</code> <code>&lt;reboot&gt;</code> <code>&lt;set [<i>package-name package-name</i>]&gt;</code>
<b>Syntax (TX Matrix Plus Router)</b>	<code>request system software delete <i>software-package</i></code> <code>&lt;force&gt;</code> <code>&lt;lcc <i>number</i>   sfc <i>number</i>&gt;</code> <code>&lt;reboot&gt;</code> <code>&lt;set [<i>package-name package-name</i>]&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Option <b>sfc</b> introduced for the TX Matrix Plus router in Junos OS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series. Option <b>set [<i>package-name package-name</i>]</b> added in Junos OS Release 12.2 for M Series, MX Series, T Series routers, and Branch SRX Services Gateways. Option <b>reboot</b> introduced in Junos OS Release 12.3.
<b>Description</b>	Remove a software package or bundle from the router or switch.



**CAUTION:** Before removing a software package or bundle, make sure that you have already placed the new software package or bundle that you intend to load onto the router or switch.

- Options**    ***software-package***—Software package or bundle name. You can delete any or all of the following software bundles or packages:
- **jbase**—(Optional) Junos base software suite
  - **jcrypto**—(Optional, in domestic version only) Junos security software
  - **jdocs**—(Optional) Junos online documentation file
  - **jkernel**—(Optional) Junos kernel software suite
  - **jpfe**—(Optional) Junos Packet Forwarding Engine support
  - **jroute**—(Optional) Junos routing software suite
  - **junos**—(Optional) Junos base software





**NOTE:** On EX Series switches, some of the package names are different than those listed. To see the list of packages that you can delete on an EX Series switch, enter the command **show system software**.

**force**—(Optional) Ignore warnings and force removal of the software.

**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, remove an extension or upgrade package from a specific T640 router (or line-card chassis) that is connected to the TX Matrix router. On a TX Matrix Plus router, remove an extension or upgrade package from a specific T1600 router (or line-card chassis) that is connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.

**reboot**—As of Junos OS 12.3 and greater, automatically reboot upon completing the **request system software delete** command.

**scc**—(TX Matrix routers only) (Optional) Remove an extension or upgrade package from the TX Matrix router (or switch-card chassis).

**set [*package-name package-name*]**—(M Series, MX Series, T Series routers, and Branch SRX Series Services Gateways only) (Optional) Install multiple software packages or software add-on packages at the same time.

**sfc *number***—(TX Matrix Plus routers only) (Optional) Remove an extension or upgrade package from the TX Matrix Plus router (or switch-fabric chassis). Replace ***number*** with 0.

**Additional Information** Before upgrading the software on the router or switch, when you have a known stable system, issue the **request system snapshot** command to back up the software, including the configuration, to the /altroot and /altconfig file systems (on routers) or the /, /altroot, /config, /var, and /var/tmp file systems (on switches). After you have upgraded the software on the router or switch and are satisfied that the new packages are successfully installed and running, issue the **request system snapshot** command again to back up the new software to the /altroot and /altconfig file systems (on routers) or the /, /altroot, /config, /var, and /var/tmp file systems (on switches). After you run the **request system snapshot** command, you cannot return to the previous version of the software, because the running and backup copies of the software are identical.

**Required Privilege Level** maintenance

**Related Documentation**

- [request system software add on page 348](#)
- [request system software rollback on page 370](#)
- [request system software validate on page 374](#)

**List of Sample Output** [request system software delete jdocs on page 360](#)



**Output Fields** When you enter this command, you are provided feedback on the status of your request.

## Sample Output

### `request system software delete jdocs`

The following example displays the system software packages before and after the `jdocs` package is deleted through the `request system software delete` command:

```
user@host> show system software
Information for jbase:

Comment:
JUNOS Base OS Software Suite [7.2R1.7]

Information for jcrypto:

Comment:
JUNOS Crypto Software Suite [7.2R1.7]

Information for jdocs:

Comment:
JUNOS Online Documentation [7.2R1.7]

Information for jkernel:

Comment:
JUNOS Kernel Software Suite [7.2R1.7]
...

user@host> request system software delete jdocs
Removing package 'jdocs' ...

user@host> show system software
Information for jbase:

Comment:
JUNOS Base OS Software Suite [7.2R1.7]

Information for jcrypto:

Comment:
JUNOS Crypto Software Suite [7.2R1.7]

Information for jkernel:

Comment:
JUNOS Kernel Software Suite [7.2R1.7]
...
```



## request system software download

<b>Syntax (QFabric System)</b>	<code>request system software download <i>path package-name</i></code>
<b>Release Information</b>	Command introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Download a software package from a location on the Director device, mounted external USB flash drive, remote FTP or SCP location, or other location.
<b>Options</b>	<p><b><i>path</i></b>—Location where the software package is located. For example:</p> <ul style="list-style-type: none"> <li>• <b><i>/pbdata/packages/package-name</i></b>—For a software package that is being installed from a local directory on the switch.</li> <li>• <b><i>protocol://hostname/pathname/package-name</i></b>—For a software package or bundle that is to be downloaded and installed from a remote location. Replace <b><i>protocol</i></b> with one of the following: <ul style="list-style-type: none"> <li>• <b><i>ftp</i></b>—File Transfer Protocol. Use <b><i>ftp://hostname/pathname/package-name</i></b>. To specify authentication credentials, use <b><i>ftp://&lt;username&gt;:&lt;password&gt;@hostname/pathname/package-name</i></b>. To have the system prompt you for the password, specify <b><i>prompt</i></b> in place of the password. If a password is required, and you do not specify the password or <b><i>prompt</i></b>, an error message is displayed.</li> <li>• <b><i>scp</i></b>—Secure copy (available only for Canada and U.S. version). Use <b><i>scp://hostname/pathname/package-name</i></b>. To specify authentication credentials, use <b><i>scp://&lt;username&gt;:&lt;password&gt;@hostname/pathname/package-name</i></b>.</li> </ul> </li> </ul>
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">request system software add on page 348</a></li> <li>• <a href="#">request system software delete on page 358</a></li> <li>• <a href="#">request system software rollback on page 370</a></li> <li>• <a href="#">request system storage cleanup on page 377</a></li> <li>• <a href="#">Upgrading Software on QFX3500 and QFX3600 Standalone Switches on page 107</a></li> <li>• <a href="#">Upgrading Software on a QFabric System on page 109</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">request system software download on page 362</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.



## Sample Output

request system  
software download

```
user@switch> request system software download
ftp://ftp.install-directory/jinstall-qfabric-11.3X30.6.rpm
% Total      % Received % Xferd  Average Speed   Time    Time     Time  Current
           Dload  Upload   Total     Spent    Left     Speed
100  186M  100  186M    0     0  18.4M      0  0:00:10  0:00:10  --:--:-- 18.6M
```



## request system software nonstop-upgrade

<b>Syntax</b>	request system software nonstop-upgrade <i>package-name</i> <fabric > <director-group> <node-group <i>name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Nonstop software upgrade enables you to upgrade a QFabric system with minimal packet loss and maximum uptime. You should upgrade the devices in the following order: Director group, fabric controls and Interconnect devices, and network and server Node groups.
<b>Options</b>	<p><b><i>package-name</i></b>—Location from which the software is to be installed. For example:</p> <ul style="list-style-type: none"> <li>• <b><i>protocol://hostname/pathname/package-name</i></b>—For a software package or bundle that is to be downloaded and installed from a remote location. Replace <b><i>protocol</i></b> with one of the following: <ul style="list-style-type: none"> <li>• <b>ftp</b>—File Transfer Protocol. Use <b>ftp://hostname/pathname/package-name</b>. To specify authentication credentials, use <b>ftp://&lt;username&gt;:&lt;password&gt;@hostname/pathname/package-name</b>. To have the system prompt you for the password, specify <b>prompt</b> in place of the password. If a password is required, and you do not specify the password or <b>prompt</b>, an error message is displayed.</li> <li>• <b>http</b>—Hypertext Transfer Protocol. Use <b>http://hostname/pathname/package-name</b>. To specify authentication credentials, use <b>http://&lt;username&gt;:&lt;password&gt;@hostname/pathname/package-name</b>. If a password is required and you omit it, you are prompted for it.</li> <li>• <b>scp</b>—Secure copy (available only for Canada and U.S. version). Use <b>scp://hostname/pathname/package-name</b>. To specify authentication credentials, use <b>scp://&lt;username&gt;:&lt;password&gt;@hostname/pathname/package-name</b>.</li> </ul> </li> </ul>



### NOTE:

- The ***pathname*** in the protocol is the relative path to the user's home directory on the remote system and not the root directory.

**director-group**—Install software package on the Director group and Fabric managers.

**fabric**—Install software package on the Interconnect devices and Fabric controls.

**node-group *name*** —Install software package on the redundant server Node group, server Node group, or network Node group.



**Required Privilege Level** maintenance

**Related Documentation**

- [Performing a Nonstop Software Upgrade on the QFabric System on page 80](#)
- [Verifying Nonstop Software Upgrade for QFabric Systems on page 1868](#)
- [show chassis nonstop-upgrade node-group on page 767](#)

**List of Sample Output**

[request system software nonstop-upgrade director-group on page 364](#)  
[request system software nonstop-upgrade fabric on page 366](#)  
[request system software nonstop-upgrade node-group \(Redundant Server Node Group\) on page 367](#)  
[request system software nonstop-upgrade node-group \(Server Node Group\) on page 369](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request.

## Sample Output

**request system software**

```
user@qfabric> request system software nonstop-upgrade director-group
jinstall-qfabric-12.2X50-D10.3.rpm
Validating update package jinstall-qfabric-12.2X50-D10.3.rpm
Installing update package jinstall-qfabric-12.2X50-D10.3.rpm
```



Copyright © 2013, Juniper Networks, Inc.



```

of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase one
of rolling upgrade
[Peer Update Status]: Waiting for peer to complete phase one of rolling upgrade
[Peer Update Status]: Peer completed phase one of rolling upgrade
Setting peer DG node as the master SFC

Delaying start of local upgrade to allow peer services time to initialize [15
minutes]
Delaying start of local upgrade to allow peer services time to initialize [15
minutes]
Delaying start of local upgrade to allow peer services time to initialize [12
minutes]
Delaying start of local upgrade to allow peer services time to initialize [9
minutes]
Delaying start of local upgrade to allow peer services time to initialize [6
minutes]
Delaying start of local upgrade to allow peer services time to initialize [3
minutes]
[Peer Update Status]: Check for VMs on dg0
Triggering Final Stage of Fabric Manager Upgrade:
Updating FM-0 to Junos version 12.2X50-D10.3
[Status 2012-06-05 16:10:12]: Fabric Manager: Upgrade Final Stage started
[NW-NG-0 2012-06-05 16:10:22]: Transferring NW-NG-0 Mastership to REMOTE DG
[NW-NG-0 2012-06-05 16:11:44]: Finished NW-NG-0 Mastership switch
[Status 2012-06-05 16:11:45]: Upgrading FM-0 VM on worker DG to 12.2X50-D10.3
[DRE-0 2012-06-05 16:12:43]: Retrieving package
[DRE-0 2012-06-05 16:13:46]: ----- re0: -----
[Status 2012-06-05 16:15:17]: Load completed with 0 errors...
[Status 2012-06-05 16:15:17]: Reboot is required to complete upgrade ...
[DRE-0 2012-06-05 16:15:22]: Waiting for DRE-0 to terminate ...
[DRE-0 2012-06-05 16:15:34]: Waiting for DRE-0 to come back ...
[DRE-0 2012-06-05 16:18:44]: Running Uptime Test for DRE-0
[DRE-0 2012-06-05 16:18:51]: Uptime Test for DRE-0 Passed ...
[Status 2012-06-05 16:18:51]: DRE-0 booted successfully ...
Performing post install shutdown and cleanup

Broadcast message from root (Tue Jun 5 16:18:51 2012):

The system is going down for reboot NOW!
Director group upgrade complete

root@qfabric> Read from remote host qfabric-partition0: Connection reset by peer
Connection to qfabric-partition0 closed.

```

#### request system software

```

user@qfabric> request system software nonstop-upgrade fabric
jinstall-qfabric-12.2X50-D10.3.rpm
[FC-0 2012-06-05 16:48:53]: Retrieving package
[FC-1 2012-06-05 16:48:53]: Retrieving package

```



## nonstop-upgrade fabric

```
[IC-F4912 2012-06-05 16:48:59]: Retrieving package
[FC-0      2012-06-05 16:49:51]: ----- re0: -----
[FC-1      2012-06-05 16:49:52]: ----- re0: -----
[IC-F4912 2012-06-05 16:49:54]: ----- re0: -----
[IC-F4912 2012-06-05 16:50:42]: Step 1 of 20 Creating temporary file system
[IC-F4912 2012-06-05 16:50:42]: Step 2 of 20 Determining installation source
[IC-F4912 2012-06-05 16:50:43]: Step 3 of 20 Processing format options
[IC-F4912 2012-06-05 16:50:43]: Step 4 of 20 Determining installation slice
[IC-F4912 2012-06-05 16:50:43]: Step 5 of 20 Creating and labeling new slices
[IC-F4912 2012-06-05 16:50:44]: Step 6 of 20 Create and mount new file system
[IC-F4912 2012-06-05 16:50:53]: Step 7 of 20 Getting OS bundles
[IC-F4912 2012-06-05 16:50:53]: Step 8 of 20 Updating recovery media
[IC-F4912 2012-06-05 16:51:17]: Step 9 of 20 Extracting incoming image
[IC-F4912 2012-06-05 16:52:56]: Step 10 of 20 Unpacking OS packages
[IC-F4912 2012-06-05 16:52:59]: Step 11 of 20 Mounting jbase package
[IC-F4912 2012-06-05 16:53:28]: Step 12 of 20 Creating base OS symbolic links
[IC-F4912 2012-06-05 16:54:45]: Step 13 of 20 Creating fstab
[IC-F4912 2012-06-05 16:54:45]: Step 14 of 20 Creating new system files
[IC-F4912 2012-06-05 16:54:46]: Step 15 of 20 Adding jbundle package
[IC-F4912 2012-06-05 16:58:15]: Step 16 of 20 Backing up system data
[IC-F4912 2012-06-05 16:58:18]: Step 17 of 20 Setting up shared partition data
[IC-F4912 2012-06-05 16:58:18]: Step 18 of 20 Checking package sanity in
installation
[IC-F4912 2012-06-05 16:58:18]: Step 19 of 20 Unmounting and cleaning up temporary
file systems
[IC-F4912 2012-06-05 16:58:22]: Step 20 of 20 Setting da0s1 as new active partition
[Status    2012-06-05 16:58:34]: Load completed with 0 errors...
[Status    2012-06-05 16:58:34]: Reboot is required to complete upgrade ...
[Status    2012-06-05 16:58:34]: Trying to Connect to Node: FC-0
[Status    2012-06-05 16:58:39]: Rebooting FC-0
[Status    2012-06-05 16:58:39]: Trying to Connect to Node: FC-1
[Status    2012-06-05 16:58:44]: Rebooting FC-1
[Status    2012-06-05 16:58:44]: Trying to Connect to Node: IC-F4912
[Status    2012-06-05 16:58:50]: Rebooting IC-F4912
Success
```

## request system software nonstop-upgrade node-group

```
user@qfabric> request system software nonstop-upgrade node-group RSNG
jinstall-qfabric-12.2X50-D10.3.rpm
Upgrading target(s): RSNG

[RSNG      2012-06-05 17:26:44]: Starting with package
```



(Redundant Server  
Node Group)

```

ftp://169.254.0.3/pub/images/12.2X50-D10.3/jinstall-qfx.tgz
[RSNG 2012-06-05 17:26:44]: Retrieving package
[RSNG 2012-06-05 17:28:56]: Pushing bundle to fpc1
[RSNG 2012-06-05 17:29:26]: fpc1: Validate package...
[RSNG 2012-06-05 17:35:22]: fpc0: Validate package...
[RSNG 2012-06-05 17:35:49]: ----- fpc1 -----
[RSNG 2012-06-05 17:36:25]: Step 1 of 20 Creating temporary file system
[RSNG 2012-06-05 17:36:26]: Step 2 of 20 Determining installation source
[RSNG 2012-06-05 17:36:26]: Step 3 of 20 Processing format options
[RSNG 2012-06-05 17:36:26]: Step 4 of 20 Determining installation slice
[RSNG 2012-06-05 17:36:27]: Step 5 of 20 Creating and labeling new slices
[RSNG 2012-06-05 17:36:27]: Step 6 of 20 Create and mount new file system
[RSNG 2012-06-05 17:36:35]: Step 7 of 20 Getting OS bundles
[RSNG 2012-06-05 17:36:35]: Step 8 of 20 Updating recovery media
[RSNG 2012-06-05 17:36:56]: Step 9 of 20 Extracting incoming image
[RSNG 2012-06-05 17:38:07]: Step 10 of 20 Unpacking OS packages
[RSNG 2012-06-05 17:38:16]: Step 11 of 20 Mounting jbase package
[RSNG 2012-06-05 17:38:41]: Step 12 of 20 Creating base OS symbolic links
[RSNG 2012-06-05 17:39:41]: Step 13 of 20 Creating fstab
[RSNG 2012-06-05 17:39:42]: Step 14 of 20 Creating new system files
[RSNG 2012-06-05 17:39:42]: Step 15 of 20 Adding jbundle package
[RSNG 2012-06-05 17:42:16]: Step 16 of 20 Backing up system data
[RSNG 2012-06-05 17:42:32]: Step 17 of 20 Setting up shared partition data
[RSNG 2012-06-05 17:42:33]: Step 18 of 20 Checking package sanity in
installation
[RSNG 2012-06-05 17:42:33]: Step 19 of 20 Unmounting and cleaning up temporary
file systems
[RSNG 2012-06-05 17:42:36]: Step 20 of 20 Setting da0s2 as new active partition
[RSNG 2012-06-05 17:42:51]: ----- fpc0 - master -----
[RSNG 2012-06-05 17:42:51]: Step 1 of 20 Creating temporary file system
[RSNG 2012-06-05 17:42:51]: Step 2 of 20 Determining installation source
[RSNG 2012-06-05 17:42:51]: Step 3 of 20 Processing format options
[RSNG 2012-06-05 17:42:51]: Step 4 of 20 Determining installation slice
[RSNG 2012-06-05 17:42:51]: Step 5 of 20 Creating and labeling new slices
[RSNG 2012-06-05 17:42:51]: Step 6 of 20 Create and mount new file system
[RSNG 2012-06-05 17:42:51]: Step 7 of 20 Getting OS bundles
[RSNG 2012-06-05 17:42:51]: Step 8 of 20 Updating recovery media
[RSNG 2012-06-05 17:42:51]: Step 9 of 20 Extracting incoming image
[RSNG 2012-06-05 17:42:51]: Step 10 of 20 Unpacking OS packages
[RSNG 2012-06-05 17:42:51]: Step 11 of 20 Mounting jbase package
[RSNG 2012-06-05 17:42:51]: Step 12 of 20 Creating base OS symbolic links
[RSNG 2012-06-05 17:42:51]: Step 13 of 20 Creating fstab
[RSNG 2012-06-05 17:42:51]: Step 14 of 20 Creating new system files
[RSNG 2012-06-05 17:42:51]: Step 15 of 20 Adding jbundle package
[RSNG 2012-06-05 17:42:51]: Step 16 of 20 Backing up system data
[RSNG 2012-06-05 17:42:51]: Step 17 of 20 Setting up shared partition data
[RSNG 2012-06-05 17:42:51]: Step 18 of 20 Checking package sanity in
installation
[RSNG 2012-06-05 17:42:51]: Step 19 of 20 Unmounting and cleaning up temporary
file systems
[RSNG 2012-06-05 17:42:51]: Step 20 of 20 Setting da0s2 as new active partition
[RSNG 2012-06-05 17:43:36]: Rebooting Backup RE
[RSNG 2012-06-05 17:43:36]: ----- Rebooting fpc1 -----
[RSNG 2012-06-05 17:50:12]: Initiating Chassis In-Service-Upgrade
[RSNG 2012-06-05 17:50:33]: Upgrading group: 0 fpc: 0
[RSNG 2012-06-05 17:52:38]: Upgrade complete for group:0
[RSNG 2012-06-05 17:52:38]: Upgrading group: 1 fpc: 1
[RSNG 2012-06-05 17:54:42]: Upgrade complete for group:1
[RSNG 2012-06-05 17:54:42]: Finished processing all upgrade groups, last group
:1
[RSNG 2012-06-05 17:54:48]: Preparing for Switchover

```



```
[RSNG    2012-06-05 17:55:38]: Switchover Completed
[Status  2012-06-05 17:55:41]: Upgrade completed with 0 errors
Success
```

**request system  
software  
nonstop-upgrade  
node-group (Server  
Node Group)**

```
user@qfabric> request system software nonstop-upgrade node-group P1507-C
jinstall-qfabric-12.2X50-D10.3.rpm
Upgrading target(s): P1507-C

[P1507-C 2012-06-26 14:02:44]: Retrieving package
[P1507-C 2012-06-26 14:03:21]: ----- P1507-C: -----
[P1507-C 2012-06-26 14:03:59]: Step 1 of 20 Creating temporary file system
[P1507-C 2012-06-26 14:03:59]: Step 2 of 20 Determining installation source
[P1507-C 2012-06-26 14:03:59]: Step 3 of 20 Processing format options
[P1507-C 2012-06-26 14:03:59]: Step 4 of 20 Determining installation slice
[P1507-C 2012-06-26 14:04:00]: Step 5 of 20 Creating and labeling new slices
[P1507-C 2012-06-26 14:04:00]: Step 6 of 20 Create and mount new file system
[P1507-C 2012-06-26 14:04:08]: Step 7 of 20 Getting OS bundles
[P1507-C 2012-06-26 14:04:09]: Step 8 of 20 Updating recovery media
[P1507-C 2012-06-26 14:04:29]: Step 9 of 20 Extracting incoming image
[P1507-C 2012-06-26 14:05:42]: Step 10 of 20 Unpacking OS packages
[P1507-C 2012-06-26 14:05:49]: Step 11 of 20 Mounting jbase package
[P1507-C 2012-06-26 14:06:14]: Step 12 of 20 Creating base OS symbolic links
[P1507-C 2012-06-26 14:07:15]: Step 13 of 20 Creating fstab
[P1507-C 2012-06-26 14:07:15]: Step 14 of 20 Creating new system files
[P1507-C 2012-06-26 14:07:16]: Step 15 of 20 Adding jbundle package
[P1507-C 2012-06-26 14:09:52]: Step 16 of 20 Backing up system data
[P1507-C 2012-06-26 14:10:07]: Step 17 of 20 Setting up shared partition data
[P1507-C 2012-06-26 14:10:07]: Step 18 of 20 Checking package sanity in
installation
[P1507-C 2012-06-26 14:10:08]: Step 19 of 20 Unmounting and cleaning up temporary
file systems
[P1507-C 2012-06-26 14:10:11]: Step 20 of 20 Setting da0s2 as new active partition
[Status  2012-06-26 14:10:25]: Trying to Connect to Node: P1507-C
[Status  2012-06-26 14:10:32]: Rebooting P1507-C
[Status  2012-06-26 14:10:32]: Upgrade completed with 0 errors
Success
```



## request system software rollback

---

<b>Syntax</b>	request system software rollback
<b>Syntax (EX Series Switches)</b>	request system software rollback <all-members> <local> <member <i>member-id</i> > <reboot>
<b>Syntax (TX Matrix Router)</b>	request system software rollback <lcc <i>number</i>   scc> <reboot>
<b>Syntax (TX Matrix Plus Router)</b>	request system software rollback <lcc <i>number</i>   sfc <i>number</i> > <reboot>
<b>Syntax (MX Series Router)</b>	request system software rollback <all-members> <local> <member <i>member-id</i> > <reboot>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Option <b>sfc</b> introduced for the TX Matrix Plus router in Junos OS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series. Command behavior changed in Junos OS Release 12.1. Option <b>reboot</b> introduced in Junos OS Release 12.3.
<b>Description</b>	<p>For all versions of Junos OS up to and including Junos OS 11.4, revert to the software that was loaded at the last successful <b>request system software add</b> command.</p> <p>As of Junos OS 12.1 and greater, revert to the last known good state before the most recent <b>request system software (add   delete)</b> command. For example, using rollback in Junos OS 12.1 after using <b>request system software add</b> restores the system to a known good state prior to using the <b>add</b> command. Similarly, using rollback in Junos OS 12.1 after using <b>request system software delete</b> restores the system to a known good state prior to using the <b>delete</b> command.</p> <p>A software rollback fails if any required package (or a <b>jbundle</b> package containing the required package) cannot be found in /var/sw/pkg.</p> <p><i>Additional Information</i></p> <ul style="list-style-type: none"><li>On M Series and T Series routers, if <b>request system software add &lt;jinstall&gt; reboot</b> was used for the previous installation, then <b>request system software rollback</b> has no effect. In this case, use <b>jinstall</b> to reinstall the required package.</li></ul>



- On M Series and T Series routers, if **request system software add <sdk1>** was used for the previous installation, then **request system software rollback** removes the last installed SDK package (**sdk1** in this example).
- On SRX Series devices with dual root systems, when **request system software rollback** is run, the system switches to the alternate root. Each root can have a different version of Junos OS. Rollback takes each root back to the previously installed image.

**Options** **all-members**—(EX4200 switches and MX Series routers only) (Optional) Attempt to roll back to the previous set of packages on all members of the Virtual Chassis configuration.

**lcc number**—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, attempt to roll back to the previous set of packages on a T640 router (or line-card chassis) connected to the TX Matrix router. On a TX Matrix Plus router, attempt to roll back to the previous set of packages on a T1600 router (or line-card chassis) connected to the TX Matrix Plus router. Replace **number** with a value from 0 through 3.

**local**—(EX4200 switches and MX Series routers only) (Optional) Attempt to roll back to the previous set of packages on the local Virtual Chassis member.

**member member-id**—(EX4200 switches and MX Series routers only) (Optional) Attempt to roll back to the previous set of packages on the specified member of the Virtual Chassis configuration. For EX4200 switches, replace **member-id** with a value from 0 through 9. For an MX Series Virtual Chassis, replace **member-id** with a value of 0 or 1.

**none**—For all versions of Junos OS up to and including Junos OS 11.4, revert to the set of software as of the last successful **request system software add**. As of Junos OS 12.1 and greater, revert to the last known good state before the most recent **request system software (add | delete)** command.

**reboot**—As of Junos OS 12.3 and greater, automatically reboot upon completing the **request system software rollback** command.

**scc**—(TX Matrix routers only) (Optional) Attempt to roll back to the previous set of packages on the TX Matrix router (or switch-card chassis).

**sfc number**—(TX Matrix Plus routers only) (Optional) Attempt to roll back to the previous set of packages on the TX Matrix Plus router (or switch-fabric chassis). Replace **number** with 0.

**Required Privilege Level** maintenance

**Related Documentation**

- [request system software abort](#)
- [request system software add on page 348](#)
- [request system software delete on page 358](#)



- [request system software validate on page 374](#)
- [request system configuration rescue delete on page 329](#)
- [request system configuration rescue save on page 330](#)

**List of Sample Output**   [request system software rollback on page 373](#)

**Output Fields**   When you enter this command, you are provided feedback on the status of your request.



## Sample Output

request system  
software rollback

```
user@host> request system software rollback
Verified SHA1 checksum of ./jbase-7.2R1.7.tgz
Verified SHA1 checksum of ./jdocs-7.2R1.7.tgz
Verified SHA1 checksum of ./jroute-7.2R1.7.tgz
Installing package './jbase-7.2R1.7.tgz' ...
Available space: 35495 require: 7335
Installing package './jdocs-7.2R1.7.tgz' ...
Available space: 35339 require: 3497
Installing package './jroute-7.2R1.7.tgz' ...
Available space: 35238 require: 6976
NOTICE: uncommitted changes have been saved in
/var/db/config/juniper.conf.pre-install
Reloading /config/juniper.conf.gz ...
Activating /config/juniper.conf.gz ...
mgd: commit complete
Restarting mgd ...
Restarting aprobed ...
Restarting apsd ...
Restarting cosd ...
Restarting fsad ...
Restarting fud ...
Restarting gcdrd ...
Restarting ilmid ...
Restarting irsd ...
Restarting l2tpd ...
Restarting mib2d ...
Restarting nasd ...
Restarting pppoed ...
Restarting rdd ...
Restarting rmopd ...
Restarting rtspd ...
Restarting sampled ...
Restarting serviced ...
Restarting snmpd ...
Restarting spd ...
Restarting vrrpd ...

WARNING: cli has been replaced by an updated version:
CLI release 7.2R1.7 built by builder on 2005-04-22 02:03:44 UTC
Restart cli using the new version ? [yes,no] (yes) yes

Restarting cli ...
user@host
```



## request system software validate

---

<b>Syntax</b>	<code>request system software validate <i>package-name</i></code> <code>&lt;set [<i>package-name package-name</i>]&gt;</code>
<b>Syntax (TX Matrix Router)</b>	<code>request system software validate <i>package-name</i></code> <code>&lt;fcc <i>number</i>   scc&gt;</code> <code>&lt;set [<i>package-name package-name</i>]&gt;</code>
<b>Syntax (TX Matrix Plus Router)</b>	<code>request system software validate <i>package-name</i></code> <code>&lt;fcc <i>number</i>   sfc <i>number</i>&gt;</code> <code>&lt;set [<i>package-name package-name</i>]&gt;</code>
<b>Syntax (MX Series Router)</b>	<code>request system software validate <i>package-name</i></code> <code>&lt;member <i>member-id</i>&gt;</code> <code>&lt;set [<i>package-name package-name</i>]&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. sfc option introduced for the TX Matrix Plus router in Junos OS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series. set [ <i>package-name package-name</i> ] option added in Junos OS Release 12.2 for M Series, MX Series, T Series routers, and Branch SRX Series Services Gateways.
<b>Description</b>	Validate candidate software against the current configuration of the router.
<b>Options</b>	<p><b>fcc <i>number</i></b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, validate the software bundle or package on a specific T640 router (or line-card chassis) that is connected to the TX Matrix router. On a TX Matrix Plus router, validate the software bundle or package on a specific T1600 router (or line-card chassis) that is connected to the TX Matrix Plus router. Replace <b><i>number</i></b> with a value from 0 through 3.</p> <p><b>member <i>member-id</i></b>—(MX Series routers only) (Optional) Validate the software bundle or package on the specified member of the Virtual Chassis configuration. For an MX Series Virtual Chassis, replace <b><i>member-id</i></b> with a value of 0 or 1.</p> <p><b><i>package-name</i></b>—Name of the software bundle or package to test.</p> <p><b>scc</b>—(TX Matrix routers only) (Optional) Validate the software bundle or package for the TX Matrix router (or switch-card chassis).</p> <p><b>set [<i>package-name package-name</i>]</b>—(M Series, MX Series, T Series routers, and Branch SRX Series Services Gateways only) (Optional) Install multiple software packages or software add-on packages at the same time.</p> <p><b>sfc <i>number</i></b>—(TX Matrix Plus routers only) (Optional) Validate the software bundle or package for the TX Matrix Plus router (or switch-fabric chassis).</p>
<b>Additional Information</b>	By default, when you issue the <b>request system software validate</b> command on a TX Matrix master Routing Engine, all the T640 master Routing Engines that are connected to it are validated. If you issue the same command on the TX Matrix backup Routing Engine, all



the T640 backup Routing Engines that are connected to it are upgraded to the same version of software.

Likewise, if you issue the **request system software validate** command on a TX Matrix Plus master Routing Engine, all the T1600 master Routing Engines that are connected to it are validated. If you issue the same command on a TX Matrix Plus backup Routing Engine, all the T1600 backup Routing Engines that are connected to it are upgraded to the same version of software.

<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• request system software abort</li><li>• <a href="#">request system software add on page 348</a></li><li>• <a href="#">request system software delete on page 358</a></li><li>• <a href="#">request system software rollback on page 370</a></li></ul>
<b>List of Sample Output</b>	<a href="#">request system software validate (Successful Case) on page 376</a> <a href="#">request system software validate (Failure Case) on page 376</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.



## Sample Output

### request system software validate (Successful Case)

```
user@host> request system software validate /var/sw/pkg/jbundle-5.3I20020124_0520_sjg.tgz
Checking compatibility with configuration
Initializing...
Using /packages/jbase-5.3I20020122_1901_sjg
Using /var/sw/pkg/jbundle-5.3I20020124_0520_sjg.tgz
Using /var/chroot/var/tmp/jbundle/jbase-5.3I20020124_0520_sjg.tgz
Using /var/chroot/var/tmp/jbundle/jkernel-5.3I20020124_0520_sjg.tgz
Using /var/chroot/var/tmp/jbundle/jcrypto-5.3I20020124_0520_sjg.tgz
Using /var/chroot/var/tmp/jbundle/jpfe-5.3I20020124_0520_sjg.tgz
Using /var/chroot/var/tmp/jbundle/jdocs-5.3I20020124_0520_sjg.tgz
Using /var/chroot/var/tmp/jbundle/jroute-5.3I20020124_0520_sjg.tgz
Validating against /config/juniper.conf.gz
mgd: commit complete

WARNING: cli has been replaced by an updated version:
CLI release 5.3I0 built by sjg on 2002-01-24 05:23:53 UTC
Restart cli using the new version ? [yes,no] (yes)
```

### request system software validate (Failure Case)

```
user@host> request system software validate 6.3/
Pushing bundle to lcc0-re0
error: Failed to transfer package to lcc0-re0

user@host> request system software validate test
Pushing bundle to lcc0-re0
Pushing bundle to lcc2-re0

lcc0-re0:
gzip: stdin: not in gzip format
tar: child returned status 1
ERROR: Not a valid package: /var/tmp/test
```



## request system storage cleanup

<b>Syntax</b>	request system storage cleanup <dry-run>
<b>Syntax (EX Series Switches)</b>	request system storage cleanup <all-members> <dry-run> <local> <member <i>member-id</i> >
<b>Syntax (MX Series Router)</b>	request system storage cleanup <all-members> <dry-run> <local> <member <i>member-id</i> >
<b>Syntax (QFX Series)</b>	request system storage cleanup <component ( <i>serial number</i>   <i>UUID</i>   all)> <director-group <i>name</i> > <dry-run> <infrastructure <i>name</i> > <interconnect-device <i>name</i> > <name-tag <i>name-tag</i> > <node-group <i>name</i> > <prune> <qfabric (component <i>name</i> )   dry-run   name-tag   repository> <repository (core   log)>
<b>Release Information</b>	Command introduced in Junos OS Release 7.4. <b>dry-run</b> option introduced in Junos OS Release 7.6. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Free storage space on the router or switch by rotating log files and proposing a list of files for deletion. User input is required for file deletion. On a QFabric system, you can delete debug files located on individual devices or on the entire QFabric system.
<b>Options</b>	<p><b>all-members</b>—(EX4200 switches and MX Series routers only) (Optional) Delete files on all members of the Virtual Chassis configuration.</p> <p><b>component (<i>UUID</i>   <i>serial number</i>   all)</b>—(QFabric systems only) (Optional) Delete files located on individual QFabric system devices or on the entire QFabric system.</p> <p><b>director-group <i>name</i></b>—(QFabric systems only) (Optional) Delete files on the Director group.</p> <p><b>dry-run</b>—(Optional) List files proposed for deletion (without deleting them).</p> <p><b>infrastructure <i>name</i></b>—(QFabric systems only) (Optional) Delete files on the fabric control Routing Engine and fabric manager Routing Engine.</p>



**interconnect-device *name***—(QFabric systems only) (Optional) Delete files on the Interconnect device.

**local**—(EX4200 switches and MX Series routers only) (Optional) Delete files on the local Virtual Chassis member.

**member *member-id***—(EX4200 switches and MX Series routers only) (Optional) Delete files on the specified member of the Virtual Chassis configuration. For EX4200 switches, replace ***member-id*** with a value from 0 through 9. For an MX Series Virtual Chassis, replace ***member-id*** with a value of 0 or 1.

**name-tag *name-tag***—(QFabric systems only) (Optional) Delete debug files that match a specific regular expression.

**node-group *name***—(QFabric systems only) (Optional) Delete files on the Node group.

**prune**—(QFabric systems only) (Optional) Delete debug files located in either the core or log debug repositories of a QFabric system device.

**qfabric component *name***—(QFabric systems only) (Optional) Delete debug files located in the debug repositories of a QFabric system device.

**repository (*core* | *log*)**—(QFabric systems only) (Optional) Specify the repository on the QFabric system device for which you want to delete debug files.

**Additional Information** If logging is configured and being used, the **dry-run** option rotates the log files. In that case, the output displays the message “Currently rotating log files, please wait.” If no logging is currently under way, the output displays only a list of files to delete.

**Required Privilege Level** maintenance

**List of Sample Output** [request system storage cleanup dry-run on page 380](#)  
[request system storage cleanup on page 380](#)  
[request system storage cleanup director-group \(QFabric Systems\) on page 380](#)  
[request system storage cleanup infrastructure device-name \(QFabric Systems\) on page 382](#)  
[request system storage cleanup interconnect-device device-name \(QFabric Systems\) on page 383](#)  
[request system storage cleanup node-group group-name \(QFabric Systems\) on page 384](#)  
[request system storage cleanup qfabric component device-name \(QFabric Systems\) on page 385](#)  
[request system storage cleanup qfabric component device-name repository core \(QFabric Systems\) on page 386](#)  
[request system storage cleanup qfabric component all \(QFabric Systems\) on page 386](#)

**Output Fields** [Table 34 on page 379](#) describes the output fields for the **request system storage cleanup** command. Output fields are listed in the approximate order in which they appear.



Table 34: request system storage cleanup Output Fields

Field Name	Field Description
<b>List of files to delete:</b>	Shows list of files available for deletion.
<b>Size</b>	Size of the core-dump file.
<b>Date</b>	Last core-dump file modification date and time.
<b>Name</b>	Name of the core-dump file.
<b>Directory to delete:</b>	Shows list of directories available for deletion.
<b>Repository scope:</b>	Repository where core-dump files and log files are stored. The core-dump files are located in the <b>core</b> repository, and the log files are located in the <b>log</b> repository. The default <b>Repository scope</b> is shared since both the <b>core</b> and <b>log</b> repositories are shared by all of the QFabric system devices.
<b>Repository head:</b>	Name of the top-level repository location.
<b>Repository name:</b>	Name of the repository: <b>core</b> or <b>log</b> .
<b>Creating list of debug artifacts to be removed under:</b>	Shows location of files available for deletion.
<b>List of debug artifacts to be removed under:</b>	Shows list of files available for deletion.



## Sample Output

### request system storage cleanup dry-run

```
user@host> request system storage cleanup dry-run
Currently rotating log files, please wait.
This operation can take up to a minute.
```

List of files to delete:

	Size	Date	Name
	11.4K	Mar 8 15:00	/var/log/messages.1.gz
	7245B	Feb 5 15:00	/var/log/messages.3.gz
	11.8K	Feb 22 13:00	/var/log/messages.2.gz
	3926B	Mar 16 13:57	/var/log/messages.0.gz
	3962B	Feb 22 12:47	/var/log/sampled.1.gz
	4146B	Mar 8 12:20	/var/log/sampled.0.gz
	4708B	Dec 21 11:39	/var/log/sampled.2.gz
	7068B	Jan 16 18:00	/var/log/messages.4.gz
	13.7K	Dec 27 22:00	/var/log/messages.5.gz
	890B	Feb 22 17:22	/var/tmp/sampled.pkts
	65.8M	Oct 26 09:10	/var/sw/pkg/jinstall-7.4R1.7-export-signed.tgz
	63.1M	Oct 26 09:13	/var/sw/pkg/jbundle-7.4R1.7.tgz

### request system storage cleanup

```
user@host> request system storage cleanup
Currently rotating log files, please wait.
This operation can take up to a minute.
```

List of files to delete:

	Size	Date	Name
	11.4K	Mar 8 15:00	/var/log/messages.1.gz
	7245B	Feb 5 15:00	/var/log/messages.3.gz
	11.8K	Feb 22 13:00	/var/log/messages.2.gz
	3926B	Mar 16 13:57	/var/log/messages.0.gz
	11.6K	Mar 8 15:00	/var/log/messages.5.gz
	7254B	Feb 5 15:00	/var/log/messages.6.gz
	12.9K	Feb 22 13:00	/var/log/messages.8.gz
	3726B	Mar 16 13:57	/var/log/messages.7.gz
	3962B	Feb 22 12:47	/var/log/sampled.1.gz
	4146B	Mar 8 12:20	/var/log/sampled.0.gz
	4708B	Dec 21 11:39	/var/log/sampled.2.gz
	7068B	Jan 16 18:00	/var/log/messages.4.gz
	13.7K	Dec 27 22:00	/var/log/messages.5.gz
	890B	Feb 22 17:22	/var/tmp/sampled.pkts
	65.8M	Oct 26 09:10	/var/sw/pkg/jinstall-7.4R1.7-export-signed.tgz
	63.1M	Oct 26 09:13	/var/sw/pkg/jbundle-7.4R1.7.tgz

Delete these files ? [yes,no] (yes)

### request system storage cleanup

```
user@switch> request system storage cleanup director-group
List of files to delete:
```



# director-group (QFabric Systems)

	Size	Date	Name
4.0K	2011-11-07	05:16:29	/tmp/2064.sfcauth
4.0K	2011-11-07	05:07:34	/tmp/30804.sfcauth
4.0K	2011-11-07	04:13:41	/tmp/26792.sfcauth
4.0K	2011-11-07	04:13:39	/tmp/26432.sfcauth
0	2011-11-07	07:45:40	/tmp/cluster_cleanup.log
1.3M	2011-11-07	07:39:11	/tmp/cn_monitor.20111107-052401.log
4.0K	2011-11-07	07:36:29	/tmp/clustat.28019.log
4.0K	2011-11-07	07:36:29	/tmp/clustat_x.28019.log
9.6M	2011-11-07	05:30:24	/tmp/sfc.2.log
4.0K	2011-11-07	05:28:11	/tmp/mgd-init.1320672491.log
248K	2011-11-07	05:19:24	/tmp/cn_monitor.20111107-045111.log
4.0K	2011-11-07	05:17:18	/tmp/clustat.3401.log
4.0K	2011-11-07	05:17:18	/tmp/clustat_x.3401.log
8.0K	2011-11-07	04:58:25	/tmp/mgd-init.1320670633.log
0	2011-11-07	04:54:01	/tmp/mysql_db_install_5.1.37.log
4.0K	2011-11-07	04:52:08	/tmp/cn_send.log
0	2011-11-07	04:52:00	/tmp/init_eth0.log
4.0K	2011-11-07	04:49:35	/tmp/install_interfaces.sh.log
4.0K	2011-11-07	04:48:15	/tmp/bootstrap.sh.log
160K	2011-11-07	04:47:43	/tmp/bootstrap_cleanup.log
38M	2011-11-07	04:42:42	/tmp/cn_monitor.20111104-110308.log
4.0K	2011-11-07	04:38:47	/tmp/clustat.30913.log
4.0K	2011-11-07	04:38:47	/tmp/clustat_x.30913.log
4.0K	2011-11-07	04:38:03	/tmp/dcf_upgrade.sh.remove.log
4.0K	2011-11-07	04:38:03	/tmp/peer_update.log
4.0K	2011-11-07	04:38:02	/tmp/dcf_upgrade.log
4.0K	2011-11-07	04:38:02	/tmp/perl_mark_upgrade.log
8.0K	2011-11-07	04:13:42	/tmp/install_dcf_rpm.log
4.0K	2011-11-07	04:13:06	/tmp/00_cleanup.sh.1320667986.log
0	2011-11-07	04:13:06	/tmp/ccif_patch_4410_4450.sh.1320667986.log
4.0K	2011-11-07	04:13:06	/tmp/dcf_tools.sh.1320667986.log
0	2011-11-07	04:13:06	/tmp/initial.sh.1320667986.log
0	2011-11-07	04:13:06	/tmp/inventory.sh.1320667986.log
4.0K	2011-11-07	04:13:06	/tmp/qf-db.sh.1320667986.log
4.0K	2011-11-07	04:13:06	/tmp/sfc.sh.1320667986.log
8.0K	2011-11-07	04:13:05	/tmp/jinstall-qfabric.log
8.0K	2011-11-04	11:10:24	/tmp/mgd-init.1320430192.log
4.0K	2011-11-04	11:07:03	/tmp/mysql_dcf_db_install.log
8.0K	2011-11-04	10:55:07	/tmp/ccif_patch_4410_4450.sh.1320429307.log
8.0K	2011-11-04	10:55:07	/tmp/initial.sh.1320429307.log
4.0K	2011-11-04	10:55:07	/tmp/inventory.sh.1320429307.log
8.0K	2011-11-04	10:55:07	/tmp/sfc.sh.1320429307.log
4.0K	2011-11-04	10:54:09	/tmp/ks-script-Ax0tz5.log
4.0K	2011-11-07	04:13:06	/tmp//sfc.sh.1320667986.log
8.0K	2011-11-04	10:55:07	/tmp//sfc.sh.1320429307.log

Directory to delete:

45M 2011-11-08 10:57:43 /tmp/sfc-captures

List of files to delete:

	Size	Date	Name
4.0K	2011-11-08	05:47:47	/tmp/5713.sfcauth
4.0K	2011-11-08	05:14:32	/tmp/14494.sfcauth
4.0K	2011-11-08	05:11:47	/tmp/9978.sfcauth
4.0K	2011-11-08	05:09:37	/tmp/6128.sfcauth
4.0K	2011-11-08	05:04:28	/tmp/29703.sfcauth
4.0K	2011-11-07	11:59:10	/tmp/7811.sfcauth
4.0K	2011-11-07	11:36:08	/tmp/32415.sfcauth
4.0K	2011-11-07	11:30:30	/tmp/22406.sfcauth



```

4.0K  2011-11-07 11:24:37 /tmp/12131.sfcauth
4.0K  2011-11-07 10:48:42 /tmp/12687.sfcauth
4.0K  2011-11-07 09:27:20 /tmp/31082.sfcauth
4.0K  2011-11-07 07:33:58 /tmp/14633.sfcauth
4.0K  2011-11-07 05:08:25 /tmp/15447.sfcauth
4.0K  2011-11-07 04:12:29 /tmp/26874.sfcauth
4.0K  2011-11-07 04:12:27 /tmp/26713.sfcauth
4.0K  2011-11-07 03:49:17 /tmp/17691.sfcauth
4.0K  2011-11-05 01:32:23 /tmp/5716.sfcauth
4.0K  2011-11-07 08:00:17 /tmp/sfcsnmpd.log
4.0K  2011-11-07 07:57:50 /tmp/cluster_cleanup.log
824K  2011-11-07 07:38:37 /tmp/cn_monitor.20111107-053643.log
4.0K  2011-11-07 07:36:30 /tmp/clustat.18399.log
4.0K  2011-11-07 07:36:30 /tmp/clustat_x.18399.log
4.0K  2011-11-07 07:35:47 /tmp/command_lock.log
4.0K  2011-11-07 05:39:54 /tmp/mgd-init.1320673194.log
92K   2011-11-07 05:19:25 /tmp/cn_monitor.20111107-050412.log
4.0K  2011-11-07 05:17:20 /tmp/clustat.30115.log
4.0K  2011-11-07 05:17:20 /tmp/clustat_x.30115.log
8.0K  2011-11-07 05:08:07 /tmp/mgd-init.1320671241.log
4.0K  2011-11-07 05:04:57 /tmp/cn_send.log
0     2011-11-07 05:04:52 /tmp/init_eth0.log
4.0K  2011-11-07 05:02:38 /tmp/install_interfaces.sh.log
4.0K  2011-11-07 05:01:19 /tmp/bootstrap.sh.log
160K  2011-11-07 05:00:47 /tmp/bootstrap_cleanup.log
28M   2011-11-07 04:42:27 /tmp/cn_monitor.20111104-112954.log
4.0K  2011-11-07 04:38:49 /tmp/clustat.6780.log
4.0K  2011-11-07 04:38:49 /tmp/clustat_x.6780.log
4.0K  2011-11-07 04:38:05 /tmp/issue_event.log
4.0K  2011-11-07 04:38:05 /tmp/peer_upgrade_reboot.log
12K   2011-11-07 04:38:05 /tmp/primary_update.log
4.0K  2011-11-07 04:38:04 /tmp/dcf_upgrade.sh.remove.log
4.0K  2011-11-07 04:38:04 /tmp/peer_rexec_upgrade.log
4.0K  2011-11-07 04:13:42 /tmp/peer_install_dcf_rpm.log
4.0K  2011-11-07 04:11:57 /tmp/dcf-tools.sh.1320667917.log
0     2011-11-07 04:11:57 /tmp/initial.sh.1320667917.log
0     2011-11-07 04:11:57 /tmp/inventory.sh.1320667917.log
4.0K  2011-11-07 04:11:57 /tmp/qf-db.sh.1320667917.log
4.0K  2011-11-07 04:11:57 /tmp/sfc.sh.1320667917.log
4.0K  2011-11-07 04:11:56 /tmp/00_cleanup.sh.1320667916.log
0     2011-11-07 04:11:56 /tmp/ccif_patch_4410_4450.sh.1320667916.log
8.0K  2011-11-07 04:11:56 /tmp/jinstall-qfabric.log
4.0K  2011-11-07 04:11:33 /tmp/dcf_upgrade.log
8.0K  2011-11-04 11:53:12 /tmp/mgd-init.1320432782.log
8.0K  2011-11-04 11:06:17 /tmp/ccif_patch_4410_4450.sh.1320429977.log
8.0K  2011-11-04 11:06:17 /tmp/initial.sh.1320429977.log
4.0K  2011-11-04 11:06:17 /tmp/inventory.sh.1320429977.log
8.0K  2011-11-04 11:06:17 /tmp/sfc.sh.1320429977.log
4.0K  2011-11-04 11:05:19 /tmp/ks-script-_tnWeb.log
4.0K  2011-11-07 04:11:57 /tmp//sfc.sh.1320667917.log
8.0K  2011-11-04 11:06:17 /tmp//sfc.sh.1320429977.log

```

Directory to delete:

```

49M   2011-11-08 10:45:20 /tmp/sfc-captures

```

request system  
storage cleanup  
infrastructure

```

user@switch> request system storage cleanup infrastructure FC-0
re0:
-----

```



device-name (QFabric Systems) List of files to delete:

Size	Date	Name
139B	Nov 8 19:03	/var/log/default-log-messages.0.gz
5602B	Nov 8 19:03	/var/log/messages.0.gz
28.4K	Nov 8 10:15	/var/log/messages.1.gz
35.2K	Nov 7 13:45	/var/log/messages.2.gz
207B	Nov 7 16:02	/var/log/wtmp.0.gz
27B	Nov 7 12:14	/var/log/wtmp.1.gz
184.4M	Nov 7 12:16	/var/sw/pkg/jinstall-dc-re-11.3I20111104_1216_dc-builder-domestic-signed.tgz
124.0K	Nov 7 15:59	/var/tmp/gres-tp/env.dat
0B	Nov 7 12:57	/var/tmp/gres-tp/lock
155B	Nov 7 16:02	/var/tmp/krt_gencfg_filter.txt
0B	Nov 7 12:35	/var/tmp/last_ccif_update
1217B	Nov 7 12:15	/var/tmp/loader.conf.preinstall
184.4M	Nov 6 07:11	/var/tmp/mchassis-install.tgz
10.8M	Nov 7 12:16	/var/tmp/preinstall/bootstrap-install-11.3I20111104_1216_dc-builder.tar
57.4K	Nov 7 12:16	/var/tmp/preinstall/configs-11.3I20111104_1216_dc-builder.tgz
259B	Nov 7 12:16	/var/tmp/preinstall/install.conf
734.3K	Nov 4 13:46	/var/tmp/preinstall/jboot-dc-re-11.3I20111104_1216_dc-builder.tgz
177.8M	Nov 7 12:16	/var/tmp/preinstall/jbundle-dc-re-11.3I20111104_1216_dc-builder-domestic.tgz
124B	Nov 7 12:15	/var/tmp/preinstall/metatags
1217B	Nov 7 12:16	/var/tmp/preinstall_boot_loader.conf
0B	Nov 7 16:02	/var/tmp/rtsdb/if-rtsdb

request system  
storage cleanup  
interconnect-device

user@switch> request system storage cleanup interconnect IC-WS001  
re1:

-----



device-name (QFabric Systems) List of files to delete:

	Size	Date	Name
11B	Nov 7 15:55	/var/jail/tmp/alarmd.ts	
128B	Nov 8 19:06	/var/log/default-log-messages.0.gz	
9965B	Nov 8 19:06	/var/log/messages.0.gz	
15.8K	Nov 8 12:30	/var/log/messages.1.gz	
15.8K	Nov 8 11:00	/var/log/messages.2.gz	
15.7K	Nov 8 07:30	/var/log/messages.3.gz	
15.8K	Nov 8 04:00	/var/log/messages.4.gz	
15.7K	Nov 8 00:30	/var/log/messages.5.gz	
18.7K	Nov 7 21:00	/var/log/messages.6.gz	
17.6K	Nov 7 19:00	/var/log/messages.7.gz	
58.3K	Nov 7 16:00	/var/log/messages.8.gz	
20.3K	Nov 7 15:15	/var/log/messages.9.gz	
90B	Nov 7 15:41	/var/log/wtmp.0.gz	
57B	Nov 7 12:41	/var/log/wtmp.1.gz	
124.0K	Nov 7 15:42	/var/tmp/gres-tp/env.dat	
0B	Nov 7 12:40	/var/tmp/gres-tp/lock	
0B	Nov 7 12:41	/var/tmp/if-rtssdb/env.lck	
12.0K	Nov 7 15:41	/var/tmp/if-rtssdb/env.mem	
132.0K	Nov 7 15:55	/var/tmp/if-rtssdb/shm_usr1.mem	
2688.0K	Nov 7 15:41	/var/tmp/if-rtssdb/shm_usr2.mem	
2048.0K	Nov 7 15:41	/var/tmp/if-rtssdb/trace.mem	
730B	Nov 7 19:57	/var/tmp/juniper.conf+.gz	
155B	Nov 7 15:53	/var/tmp/krt_gencfg_filter.txt	
0B	Nov 7 15:41	/var/tmp/rtssdb/if-rtssdb	

re0:

List of files to delete:

	Size	Date	Name
11B	Nov 7 15:55	/var/jail/tmp/alarmd.ts	
121B	Nov 8 19:06	/var/log/default-log-messages.0.gz	
16.7K	Nov 8 19:06	/var/log/messages.0.gz	
22.2K	Nov 8 17:45	/var/log/messages.1.gz	
18.4K	Nov 8 17:00	/var/log/messages.2.gz	
21.6K	Nov 8 16:00	/var/log/messages.3.gz	
17.9K	Nov 8 14:30	/var/log/messages.4.gz	
19.4K	Nov 8 13:30	/var/log/messages.5.gz	
18.2K	Nov 8 12:30	/var/log/messages.6.gz	
20.4K	Nov 8 11:30	/var/log/messages.7.gz	
21.4K	Nov 8 10:15	/var/log/messages.8.gz	
21.0K	Nov 8 09:00	/var/log/messages.9.gz	
19.9K	Nov 8 08:13	/var/log/snmp-traps.0.gz	
203B	Nov 8 15:36	/var/log/wtmp.0.gz	
57B	Nov 7 12:41	/var/log/wtmp.1.gz	
124.0K	Nov 7 15:42	/var/tmp/gres-tp/env.dat	
0B	Nov 7 12:40	/var/tmp/gres-tp/lock	
0B	Nov 7 12:41	/var/tmp/if-rtssdb/env.lck	
12.0K	Nov 7 15:41	/var/tmp/if-rtssdb/env.mem	
132.0K	Nov 7 15:55	/var/tmp/if-rtssdb/shm_usr1.mem	
2688.0K	Nov 7 15:41	/var/tmp/if-rtssdb/shm_usr2.mem	
2048.0K	Nov 7 15:41	/var/tmp/if-rtssdb/trace.mem	
727B	Nov 7 15:54	/var/tmp/juniper.conf+.gz	
155B	Nov 7 15:55	/var/tmp/krt_gencfg_filter.txt	
0B	Nov 7 15:41	/var/tmp/rtssdb/if-rtssdb	

user@switch> request system storage cleanup node-group NW-NG-0



request system  
storage cleanup  
node-group  
group-name (QFabric  
Systems)

BBAK0372:

-----  
List of files to delete:

	Size	Date	Name
	126B	Nov 8 19:07	/var/log/default-log-messages.0.gz
	179B	Nov 7 13:32	/var/log/install.0.gz
	22.9K	Nov 8 19:07	/var/log/messages.0.gz
	26.5K	Nov 8 17:30	/var/log/messages.1.gz
	20.5K	Nov 8 13:15	/var/log/messages.2.gz
	33.2K	Nov 7 17:45	/var/log/messages.3.gz
	35.5K	Nov 7 15:45	/var/log/messages.4.gz
	339B	Nov 8 17:10	/var/log/wtmp.0.gz
	58B	Nov 7 12:40	/var/log/wtmp.1.gz
	124.0K	Nov 8 17:08	/var/tmp/gres-tp/env.dat
	0B	Nov 7 12:39	/var/tmp/gres-tp/lock
	0B	Nov 7 12:59	/var/tmp/if-rtbdb/env.lock
	12.0K	Nov 8 17:09	/var/tmp/if-rtbdb/env.mem
	2688.0K	Nov 8 17:09	/var/tmp/if-rtbdb/shm_usr1.mem
	132.0K	Nov 8 17:09	/var/tmp/if-rtbdb/shm_usr2.mem
	2048.0K	Nov 8 17:09	/var/tmp/if-rtbdb/trace.mem
	1082B	Nov 8 17:09	/var/tmp/juniper.conf+.gz
	155B	Nov 7 17:39	/var/tmp/krt_gencfg_filter.txt
	0B	Nov 8 17:09	/var/tmp/rtbdb/if-rtbdb

EE3093:

-----  
List of files to delete:

	Size	Date	Name
	11B	Nov 8 17:33	/var/jail/tmp/alarmd.ts
	119B	Nov 8 19:08	/var/log/default-log-messages.0.gz
	180B	Nov 7 17:41	/var/log/install.0.gz
	178B	Nov 7 13:32	/var/log/install.1.gz
	2739B	Nov 8 19:08	/var/log/messages.0.gz
	29.8K	Nov 8 18:45	/var/log/messages.1.gz
	31.8K	Nov 8 17:15	/var/log/messages.2.gz
	20.6K	Nov 8 16:00	/var/log/messages.3.gz
	15.4K	Nov 8 10:15	/var/log/messages.4.gz
	15.4K	Nov 8 02:15	/var/log/messages.5.gz
	25.5K	Nov 7 20:45	/var/log/messages.6.gz
	48.0K	Nov 7 17:45	/var/log/messages.7.gz
	32.8K	Nov 7 13:45	/var/log/messages.8.gz
	684B	Nov 8 17:02	/var/log/wtmp.0.gz
	58B	Nov 7 12:40	/var/log/wtmp.1.gz
	124.0K	Nov 7 17:34	/var/tmp/gres-tp/env.dat
	0B	Nov 7 12:40	/var/tmp/gres-tp/lock
	0B	Nov 7 12:59	/var/tmp/if-rtbdb/env.lock
	12.0K	Nov 7 17:39	/var/tmp/if-rtbdb/env.mem
	2688.0K	Nov 7 17:39	/var/tmp/if-rtbdb/shm_usr1.mem
	132.0K	Nov 7 17:40	/var/tmp/if-rtbdb/shm_usr2.mem
	2048.0K	Nov 7 17:39	/var/tmp/if-rtbdb/trace.mem
	155B	Nov 7 17:40	/var/tmp/krt_gencfg_filter.txt
	0B	Nov 7 17:39	/var/tmp/rtbdb/if-rtbdb

request system  
storage cleanup  
qfabric component

```
user@switch> request system storage cleanup qfabric component A0001/YA0197
Repository type: regular
Repository head: /pbstorage
Creating list of debug artifacts to be removed under:
```



**device-name (QFabric Systems)**

```

/pbstorage/rdumps/A0001/YA0197
Removing debug artifacts ... (press control C to abort)
Removing /pbstorage/rdumps/A0001/YA0197/cosd.core.0.0.05162011123308.gz ... done
Removing /pbstorage/rdumps/A0001/YA0197/cosd.core.1.0.05162011123614.gz ... done
Removing /pbstorage/rdumps/A0001/YA0197/cosd.core.2.0.05162011123920.gz ... done
Removing /pbstorage/rdumps/A0001/YA0197/livecore.05132011163930.gz ... done
Removing /pbstorage/rdumps/A0001/YA0197/tnetd.core.0.1057.05162011124500.gz ...
done
Removing /pbstorage/rdumps/A0001/YA0197/vmcore.05132011120528.gz ... done
Removing /pbstorage/rdumps/A0001/YA0197/vmcore.kz ... done
Creating list of debug artifacts to be removed under: /pbstorage/rlogs/A0001/YA0197
Removing debug artifacts ... (press control C to abort)
Removing /pbstorage/rlogs/A0001/YA0197/kdumpinfo.05132011120528 ... done
Removing /pbstorage/rlogs/A0001/YA0197/kernel.tarball.0.1039.05122011234415.tgz
... done
Removing /pbstorage/rlogs/A0001/YA0197/kernel.tarball.1.1039.05132011175544.tgz
... done
Removing /pbstorage/rlogs/A0001/YA0197/tnetd.tarball.0.1057.05162011175453.tgz
... done

```

**request system  
storage cleanup  
qfabric component  
device-name  
repository core  
(QFabric Systems)**

```

user@switch> request system storage cleanup qfabric component EE3093 repository core
Repository scope: shared
Repository head: /pbdata/export
Repository name: core
Creating list of debug artifacts to be removed under: /pbdata/export/rdumps/EE3093
NOTE: core repository under /pbdata/export/rdumps/EE3093 empty

```

**request system  
storage cleanup  
qfabric component all  
(QFabric Systems)**


```

user@switch> request system storage cleanup qfabric component all
Repository scope: shared
Repository head: /pbdata/export
Creating list of debug artifacts to be removed under: /pbdata/export/rdumps
NOTE: core repository under /pbdata/export/rdumps/all empty
Creating list of debug artifacts to be removed under: /pbdata/export/rlogs
List of debug artifacts to clean up ... (press control C to abort)
/pbdata/export/rlogs/73747cd8-0710-11e1-b6a4-00e081c5297e/install-11072011125819.log
/pbdata/export/rlogs/77116f18-0710-11e1-a2a0-00e081c5297e/install-11072011125819.log
/pbdata/export/rlogs/BBAK0372/install-11072011121538.log
/pbdata/export/rlogs/BBAK0394/install-11072011121532.log
/pbdata/export/rlogs/EE3093/install-11072011121536.log
/pbdata/export/rlogs/WS001/YN5999/install-11072011121644.log
/pbdata/export/rlogs/WS001/YW3803/install-11072011122429.log
/pbdata/export/rlogs/cd78871a-0710-11e1-878e-00e081c5297e/install-11072011125932.log
/pbdata/export/rlogs/d0afdale-0710-11e1-a1d0-00e081c5297e/install-11072011125930.log
/pbdata/export/rlogs/d0afdale-0710-11e1-a1d0-00e081c5297e/install-11072011133211.log
/pbdata/export/rlogs/d0afdale-0710-11e1-a1d0-00e081c5297e/install-11072011155302.log
/pbdata/export/rlogs/d31ab7a6-0710-11e1-ad1b-00e081c5297e/install-11072011125931.log
/pbdata/export/rlogs/d4d0f254-0710-11e1-90c3-00e081c5297e/install-11072011125932.log

```



## request system zeroize

<b>Syntax</b>	request system zeroize <media>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 9.0.</p> <p>Command introduced in Junos OS Release 11.2 for EX Series switches.</p> <p>Option <b>media</b> added in Junos OS Release 11.4 for EX Series switches.</p> <p>Command introduced in Junos OS Release 12.2 for MX Series devices.</p> <p>Command introduced in Junos OS Release 12.3 for the QFX Series.</p>
<b>Description</b>	<div>  <p><b>NOTE:</b> The <b>media</b> option is not available on the QFX Series.</p> </div> <p>Remove all configuration information on the Routing Engines and reset all key values. If the device has dual Routing Engines, the command is broadcast to all Routing Engines on the device. The command removes all data files, including customized configuration and log files, by unlinking the files from their directories. The command removes all user-created files from the system including all plain-text passwords, secrets, and private keys for SSH, local encryption, local authentication, IPsec, RADIUS, TACACS+, and SNMP.</p> <p>This command reboots the device and sets it to the factory default configuration. After the reboot, you cannot access the device through the management Ethernet interface. Log in through the console as <b>root</b> and start the Junos OS command-line interface (CLI) by typing <b>cli</b> at the prompt.</p> <p>To completely erase user-created data so that it is unrecoverable, use the <b>media</b> option.</p>
<b>Options</b>	<p><b>media</b>—(Optional) In addition to removing all configuration and log files, the <b>media</b> option causes memory and the media to be scrubbed, removing all traces of any user-created files. Every storage device attached to the system is scrubbed, including disks, flash drives, removable USBs, and the like. The duration of the scrubbing process is dependent on the size of the media being erased. As a result, the <b>request system zeroize media</b> operation can take considerably more time than the <b>request system zeroize</b> operation. However, the critical security parameters are all removed at the beginning of the process.</p>
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>request system snapshot</li> <li><a href="#">request system snapshot on page 347</a></li> <li>Reverting to the Default Factory Configuration for the EX Series Switch</li> <li>Reverting to the Rescue Configuration for the EX Series Switch</li> <li><a href="#">Reverting to the Default Factory Configuration on page 148</a></li> </ul>



- [Reverting to the Rescue Configuration on page 150](#)
- [Reverting to the Default Factory Configuration by Using the request system zeroize Command on page 149](#)

**List of Sample Output**   [request system zeroize on page 389](#)  
[request system zeroize media on page 389](#)



## Sample Output

```

request system zeroize user@host> request system zeroize
warning: System will be rebooted and may not boot without configuration
Erase all data, including configuration and log files? [yes,no] (no) yes

0 1 1 0 0 0 done

syncing disks... All buffers synced.
Uptime: 5d19h20m26s
recorded reboot as normal shutdown
Rebooting...

U-Boot 1.1.6 (Mar 11 2011 - 04:39:06)

Board: EX4200-24T 2.11
EPLD: Version 6.0 (0x85)
DRAM: Initializing (1024 MB)
FLASH: 8 MB

Firmware Version: --- 01.00.00 ---
USB: scanning bus for devices... 2 USB Device(s) found
      scanning bus for storage devices... 1 Storage Device(s) found

ELF file is 32 bit
Consoles: U-Boot console

FreeBSD/PowerPC U-Boot bootstrap loader, Revision 2.4
(user@juniper.net, Fri Mar 11 03:03:36 UTC 2011)
Memory: 1024MB
bootsequencing is enabled
bootsuccess is set
new boot device = disk0s1:
Loading /boot/defaults/loader.conf
/kernel data=0x915c84+0xa1260 syms=[0x4+0x7cbd0+0x4+0xb1c19]

Hit [Enter] to boot immediately, or space bar for command prompt.
Booting [/kernel]...
Kernel entry at 0x800000e0 ...
GDB: no debug ports present
KDB: debugger backends: ddb
KDB: current backend: ddb
Copyright (c) 1996-2011, Juniper Networks, Inc.
All rights reserved.
Copyright (c) 1992-2006 The FreeBSD Project.
Copyright (c) 1979, 1980, 1983, 1986, 1988, 1989, 1991, 1992, 1993, 1994
The Regents of the University of California. All rights reserved.
JUNOS 11.1R1.8 #0: 2011-03-09 20:14:25 UTC

user@juniper.net:/volume/build/junos/11.1/release/11.1R1.8/obj-powerpc/bsd/kernels/
JUNIPER-EX/kernel
Timecounter "decrementer" frequency 50000000 Hz quality 0
cpu0: Freescale e500v2 core revision 2.2
cpu0: HID0 80004080
...

request system zeroize user@host> request system zeroize media
warning: System will be rebooted and may not boot without configuration

```



## media

```

Erase all data, including configuration and log files? [yes,no] (no) yes

warning: ipsec-key-management subsystem not running - not needed by configuration.
warning: zeroizing fpc0

{master:0}
root> Waiting (max 60 seconds) for system process `vnlr' to stop...done
. . .
Syncing disks, vnodes remaining...2 4 2 4 3 2 1 1 0 0 0 done

syncing disks... All buffers synced.
Uptime: 14m50s
recorded reboot as normal shutdown
Rebooting...

U-Boot 1.1.6 (Apr 21 2011 - 13:58:42)

Board: EX4200-48PX 1.1
EPLD: Version 8.0 (0x82)
DRAM: Initializing (512 MB)
FLASH: 8 MB
NAND: No NAND device found!!!
0 MiB

Firmware Version: --- 01.00.00 ---
USB: scanning bus for devices... 2 USB Device(s) found
      scanning bus for storage devices... 1 Storage Device(s) found

ELF file is 32 bit
Consoles: U-Boot console

FreeBSD/PowerPC U-Boot bootstrap loader, Revision 2.2
(vtseng@svl-junos-pool27.juniper.net, Fri Feb 26 17:48:51 PST 2010)
Memory: 512MB
Loading /boot/defaults/loader.conf
/kernel data=0x9abfdc+0xb06e4 syms=[0x4+0x83b30+0x4+0xbd7c6]

Hit [Enter] to boot immediately, or space bar for command prompt.
Booting [/kernel] in 1 second... Booting [/kernel]...
Kernel entry at 0x800000e0 ...
GDB: no debug ports present
KDB: debugger backends: ddb
KDB: current backend: ddb
Copyright (c) 1996-2011, Juniper Networks, Inc.
All rights reserved.
Copyright (c) 1992-2006 The FreeBSD Project.
Copyright (c) 1979, 1980, 1983, 1986, 1988, 1989, 1991, 1992, 1993, 1994
The Regents of the University of California. All rights reserved.
JUNOS 11.4R1.2 #0: 2011-10-27 18:05:39 UTC
user@juniper.net:/volume/build/junos/11.4/release/11.4R1.2/obj-powerpc/
bsd/kernels/JUNIPER-EX/kernel
can't re-use a leaf (all_slot_serialid)!
Timecounter "decrementer" frequency 50000000 Hz quality 0
cpu0: Freescale e500v2 core revision 2.2
cpu0: HID0 80004080<EMCP,TBEN,EN_MAS7_UPDATE>
real memory = 511705088 (488 MB)
avail memory = 500260864 (477 MB)
ETHERNET SOCKET BRIDGE initialising
Initializing EXSERIES platform properties ...
. . .
Automatic reboot in progress...

```



```

Media check on da0 on ex platforms
** /dev/da0s2a
FILE SYSTEM CLEAN; SKIPPING CHECKS
clean, 20055 free (31 frags, 2503 blocks, 0.0% fragmentation)
zeroizing /dev/da0s1a ...
. . .
zeroizing /dev/da0s3d ...
. . .
zeroizing /dev/da0s3e ...
. . .
zeroizing /dev/da0s4d ...
. . .
zeroizing /dev/da0s4e ...
. . .

syncing disks... All buffers synced.
Uptime: 3m40s
Rebooting...

U-Boot 1.1.6 (Apr 21 2011 - 13:58:42)

Board: EX4200-48PX 1.1
EPLD: Version 8.0 (0x82)
DRAM: Initializing (512 MB)
FLASH: 8 MB
NAND: No NAND device found!!!
0 MiB

Firmware Version: --- 01.00.00 ---
USB: scanning bus for devices... 2 USB Device(s) found
      scanning bus for storage devices... 1 Storage Device(s) found

ELF file is 32 bit
Consoles: U-Boot console

FreeBSD/PowerPC U-Boot bootstrap loader, Revision 2.2
(vtseng@svl-junos-pool27.juniper.net, Fri Feb 26 17:48:51 PST 2010)
Memory: 512MB
Loading /boot/defaults/loader.conf
/kernel data=0x9abfdc+0xb06e4 syms=[0x4+0x83b30+0x4+0xbd7c6]

Hit [Enter] to boot immediately, or space bar for command prompt.
Booting [/kernel] in 1 second... Booting [/kernel]...
Kernel entry at 0x800000e0 ...
GDB: no debug ports present
KDB: debugger backends: ddb
KDB: current backend: ddb
Copyright (c) 1996-2011, Juniper Networks, Inc.
All rights reserved.
Copyright (c) 1992-2006 The FreeBSD Project.
Copyright (c) 1979, 1980, 1983, 1986, 1988, 1989, 1991, 1992, 1993, 1994
The Regents of the University of California. All rights reserved.
JUNOS 11.4R1.2 #0: 2011-10-27 18:05:39 UTC
user@juniper.net:/volume/build/junos/11.4/release/11.4R1.2/obj-powerpc/
bsd/kernels/JUNIPER-EX/kernel
can't re-use a leaf (all_slot_serialid)!
Timecounter "decrementer" frequency 50000000 Hz quality 0
cpu0: Freescale e500v2 core revision 2.2
cpu0: HID0 80004080 <EMCP,TBEN,EN_MAS7_UPDATE>
real memory = 511705088 (488 MB)
avail memory = 500260864 (477 MB)

```



```
ETHERNET SOCKET BRIDGE initialising
Initializing EXSERIES platform properties ...
. . .
Automatic reboot in progress...
Media check on da0 on ex platforms
** /dev/da0s1a
FILE SYSTEM CLEAN; SKIPPING CHECKS
clean, 20064 free (48 frags, 2502 blocks, 0.1% fragmentation)
zeroizing /dev/da0s2a ...
. . .
Creating initial configuration...mgd: error: Cannot open configuration file:
/config/juniper.conf
mgd: warning: activating factory configuration
mgd: commit complete
mgd: -----
mgd: Please login as 'root'. No password is required.
mgd: To start Initial Setup, type 'ezsetup' at the JUNOS prompt.
mgd: To start JUNOS CLI, type 'cli' at the JUNOS prompt.
mgd: -----
Setting initial options: debugger_on_panic=NO debugger_on_break=NO.
Starting optional daemons: .
Doing initial network setup:
. . .

Amnesiac (ttyu0)
```




## restart

<b>Syntax</b>	<pre>restart &lt;adaptive-services   ancpd-service   application-identification   audit-process   auto-configuration   captive-portal-content-delivery   ce-l2tp-service   chassis-control   class-of-service   clksyncd-service   database-replication   datapath-trace-service   dhcp-service   diameter-service   disk-monitoring   dynamic-flow-capture   ecc-error-logging   ethernet-connectivity-fault-management   ethernet-link-fault-management   event-processing   firewall   general-authentication-service   gracefully   iccp-service   idp-policy   immediately   interface-control   ipsec-key-management   kernel-replication   l2-learning   l2cpd-service   l2tp-service   l2tp-universal-edge   lacp   license-service   link-management   local-policy-decision-function   mac-validation   mib-process   mobile-ip   mountd-service   mpls-traceroute   mspd   multicast-snooping   named-service   nfsd-service   packet-triggered-subscribers   peer-selection-service   pgcp-service   pgm   pic-services-logging   pki-service   ppp   ppp-service   pppoe   protected-system-domain-service   redundancy-interface-process   remote-operations   root-system-domain-service   routing &lt;logical-system <i>logical-system-name</i>&gt;   sampling   sbc-configuration-process   sdk-service   service-deployment   services   services pgcp gateway <i>gateway-name</i>   snmp   soft   static-subscribers   statistics-service   subscriber-management   subscriber-management-helper   tunnel-oamd   usb-control   vrrp   web-management&gt; &lt;gracefully   immediately   soft&gt;</pre>
<b>Syntax (ACX Series Routers)</b>	<pre>restart &lt;adaptive-services   audit-process   auto-configuration   autoinstallation   chassis-control   class-of-service   clksyncd-service   database-replication   dhcp-service   diameter-service   disk-monitoring   dynamic-flow-capture   ethernet-connectivity-fault-management   ethernet-link-fault-management   event-processing   firewall   general-authentication-service   gracefully   immediately   interface-control   ipsec-key-management   l2-learning   lacp   link-management   mib-process   mobile-ip   mountd-service   mpls-traceroute   mspd   named-service   nfsd-service   pgm   pki-service   ppp   pppoe   redundancy-interface-process   remote-operations   routing   sampling   sdk-service   secure-neighbor-discovery   service-deployment   services   snmp   soft   statistics-service   subscriber-management   subscriber-management-helper   tunnel-oamd   vrrp&gt;</pre>
<b>Syntax (EX Series Switches)</b>	<pre>restart &lt;autoinstallation   chassis-control   class-of-service   database-replication   dhcp   dhcp-service   diameter-service   dot1x-protocol   ethernet-link-fault-management   ethernet-switching   event-processing   firewall   general-authentication-service   interface-control   kernel-replication   l2-learning   lacp   license-service   link-management   lldpd-service   mib-process   mountd-service   multicast-snooping   pgm   redundancy-interface-process   remote-operations   routing   secure-neighbor-discovery   service-deployment   sflow-service   snmp   vrrp   web-management&gt;</pre>
<b>Syntax (Routing Matrix)</b>	<pre>restart &lt;adaptive-services   audit-process   chassis-control   class-of-service   disk-monitoring   dynamic-flow-capture   ecc-error-logging   event-processing   firewall   interface-control   ipsec-key-management   kernel-replication   l2-learning   l2tp-service   lacp   link-management   mib-process   pgm   pic-services-logging   ppp   pppoe   redundancy-interface-process   remote-operations   routing &lt;logical-system <i>logical-system-name</i>&gt;   sampling   service-deployment   snmp&gt; &lt;all   all-lcc   lcc <i>number</i>&gt;</pre>



	<gracefully   immediately   soft>
<b>Syntax (J Series Routing Platform)</b>	<p>restart</p> <p>&lt;adaptive-services   audit-process   chassis-control   class-of-service   dhcp   dialer-services   dlsw   event-processing   firewall   interface-control   ipsec-key-management   isdn-signaling   l2-learning   l2tp-service   mib-process   network-access-service   pgm   ppp   pppoe   remote-operations   routing &lt;logical-system <i>logical-system-name</i>&gt;   sampling   service-deployment   snmp   usb-control   web-management&gt;</p> <p>&lt;gracefully   immediately   soft&gt;</p>
<b>Syntax (TX Matrix Routers)</b>	<p>restart</p> <p>&lt;adaptive-services   audit-process   chassis-control   class-of-service   dhcp-service   diameter-service   disk-monitoring   dynamic-flow-capture   ecc-error-logging   event-processing   firewall   interface-control   ipsec-key-management   kernel-replication   l2-learning   l2tp-service   lacp   link-management   mib-process   pgm   pic-services-logging   ppp   pppoe   redundancy-interface-process   remote-operations   routing &lt;logical-system <i>logical-system-name</i>&gt;   sampling   service-deployment   snmp   statistics-service&gt;</p> <p>&lt;all-chassis   all-lcc   lcc <i>number</i>   scc&gt;</p> <p>&lt;gracefully   immediately   soft&gt;</p>
<b>Syntax (TX Matrix Plus Routers)</b>	<p>restart</p> <p>&lt;adaptive-services   audit-process   chassis-control   class-of-service   dhcp-service   diameter-service   disk-monitoring   dynamic-flow-capture   ecc-error-logging   event-processing   firewall   interface-control   ipsec-key-management   kernel-replication   l2-learning   l2tp-service   lacp   link-management   mib-process   pgm   pic-services-logging   ppp   pppoe   redundancy-interface-process   remote-operations   routing &lt;logical-system <i>logical-system-name</i>&gt;   sampling   service-deployment   snmp   statistics-service&gt;</p> <p>&lt;all-chassis   all-lcc   all-sfc   lcc <i>number</i>   sfc <i>number</i>&gt;</p> <p>&lt;gracefully   immediately   soft&gt;</p>
<b>Syntax (MX Series Routers)</b>	<p>restart</p> <p>&lt;adaptive-services   ancpd-service   application-identification   audit-process   auto-configuration   captive-portal-content-delivery   ce-l2tp-service   chassis-control   class-of-service   clksyncd-service   database-replication   datapath-trace-service   dhcp-service   diameter-service   disk-monitoring   dynamic-flow-capture   ecc-error-logging   ethernet-connectivity-fault-management   ethernet-link-fault-management   event-processing   firewall   general-authentication-service   gracefully   iccp-service   idp-policy   immediately   interface-control   ipsec-key-management   kernel-replication   l2-learning   l2cpd-service   l2tp-service   l2tp-universal-edge   lacp   license-service   link-management   local-policy-decision-function   mac-validation   mib-process   mobile-ip   mounstd-service   mpls-traceroute   mspd   multicast-snooping   named-service   nfsd-service   packet-triggered-subscribers   peer-selection-service   pgcp-service   pgm   pic-services-logging   pki-service   ppp   ppp-service   pppoe   protected-system-domain-service   redundancy-interface-process   remote-operations   root-system-domain-service   routing   routing &lt;logical-system <i>logical-system-name</i>&gt;   sampling   sbc-configuration-process   sdk-service   service-deployment   services   services pgcp gateway <i>gateway-name</i>   snmp   soft   static-subscribers   statistics-service   subscriber-management   subscriber-management-helper   tunnel-oamd   usb-control   vrrp   web-management&gt;</p> <p>&lt;all-members&gt;</p> <p>&lt;gracefully   immediately   soft&gt;</p> <p>&lt;local&gt;</p> <p>&lt;member <i>member-id</i>&gt;</p>



<b>Syntax (J Series Routers)</b>	<pre>restart &lt;adaptive-services   audit-process   chassis-control   class-of-service   dhcp   dhcp-service    dialer-services   diameter-service   dlsf   event-processing   firewall   interface-control    ipsec-key-management   isdn-signaling   l2ald   l2-learning   l2tp-service   mib-process    network-access-service   pgm   ppp   pppoe   remote-operations   routing &lt;logical-system  logical-system-name&gt;   sampling   service-deployment   snmp   usb-control    web-management&gt; &lt;gracefully   immediately   soft&gt;</pre>
<b>Syntax (QFX Series)</b>	<pre>restart &lt;adaptive-services   audit-process   chassis-control   class-of-service   dialer-services    diameter-service   dlsf   ethernet-connectivity   event-processing   fibre-channel   firewall    general-authentication-service   igmp-host-services   interface-control    ipsec-key-management   isdn-signaling   l2ald   l2-learning   l2tp-service   mib-process    named-service   network-access-service   nstrace-process   pgm   ppp   pppoe    redundancy-interface-process   remote-operations  logical-system-name&gt;   routing    sampling  secure-neighbor-discovery   service-deployment   snmp   usb-control    web-management&gt; &lt;gracefully   immediately   soft&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.  Command introduced in Junos OS Release 9.0 for EX Series switches.  Command introduced in Junos OS Release 11.1 for the QFX Series.  Command introduced in Junos OS Release 12.2 for ACX Series routers.  Options added:</p> <ul style="list-style-type: none"> <li>• <b>dynamic-flow-capture</b> in Junos OS Release 7.4.</li> <li>• <b>dlsf</b> in Junos OS Release 7.5.</li> <li>• <b>event-processing</b> in Junos OS Release 7.5.</li> <li>• <b>ppp</b> in Junos OS Release 7.5.</li> <li>• <b>l2ald</b> in Junos OS Release 8.0.</li> <li>• <b>link-management</b> in Release 8.0.</li> <li>• <b>pgcp-service</b> in Junos OS Release 8.4.</li> <li>• <b>sbc-configuration-process</b> in Junos OS Release 9.5.</li> <li>• <b>services pgcp gateway</b> in Junos OS Release 9.6.</li> <li>• <b>sfc</b> and <b>all-sfc</b> for the TX Matrix Router in Junos OS Release 9.6.</li> </ul>
<b>Description</b>	Restart a Junos OS process.
	
<p><b>CAUTION:</b> Never restart a software process unless instructed to do so by a customer support engineer. A restart might cause the router or switch to drop calls and interrupt transmission, resulting in possible loss of data.</p>	
<b>Options</b>	none—Same as <b>gracefully</b> .



- adaptive-services**—(Optional) Restart the configuration management process that manages the configuration for stateful firewall, Network Address Translation (NAT), intrusion detection services (IDS), and IP Security (IPsec) services on the Adaptive Services PIC.
- all-chassis**—(TX Matrix and TX Matrix Plus routers only) (Optional) Restart the software process on all chassis.
- all-lcc**—(TX Matrix and TX Matrix Plus routers only) (Optional) For a TX Matrix router, restart the software process on all T640 routers connected to the TX Matrix router. For a TX Matrix Plus router, restart the software process on all T1600 routers connected to the TX Matrix Plus router.
- all-members**—(MX Series routers only) (Optional) Restart the software process for all members of the Virtual Chassis configuration.
- all-sfc**—(TX Matrix Plus routers only) (Optional) For a TX Matrix Plus router, restart the software processes for the TX Matrix Plus router (or switch-fabric chassis).
- ancpd-service**—(Optional) Restart the Access Node Control Protocol (ANCP) process, which works with a special Internet Group Management Protocol (IGMP) session to collect outgoing interface mapping events in a scalable manner.
- application-identification**—(Optional) Restart the process that identifies an application using intrusion detection and prevention (IDP) to allow or deny traffic based on applications running on standard or nonstandard ports.
- audit-process**—(Optional) Restart the RADIUS accounting process that gathers statistical data that can be used for general network monitoring, analyzing, and tracking usage patterns, for billing a user based on the amount of time or type of services accessed.
- auto-configuration**—(Optional) Restart the Interface Auto-Configuration process.
- autoinstallation**—(EX Series switches only) (Optional) Restart the autoinstallation process.
- captive-portal-content-delivery**—(Optional) Restart the HTTP redirect service by specifying the location to which a subscriber's initial Web browser session is redirected, enabling initial provisioning and service selection for the subscriber.
- ce-l2tp-service**—(M10, M10i, M7i, and MX Series routers only) (Optional) Restart the Universal Edge Layer 2 Tunneling Protocol (L2TP) process, which establishes L2TP tunnels and Point-to-Point Protocol (PPP) sessions through L2TP tunnels.
- chassis-control**—(Optional) Restart the chassis management process.
- class-of-service**—(Optional) Restart the class-of-service (CoS) process, which controls the router's or switch's CoS configuration.
- clksyncd-service**—(Optional) Restart the external clock synchronization process, which uses synchronous Ethernet (SyncE).



**database-replication**—(EX Series switches and MX Series routers only) (Optional) Restart the database replication process.

**datapath-trace-service**—(Optional) Restart the packet path tracing process.

**dhcp**—(J Series routers and EX Series switches only) (Optional) Restart the software process for a Dynamic Host Configuration Protocol (DHCP) server. A DHCP server allocates network IP addresses and delivers configuration settings to client hosts without user intervention.

**dhcp-service**—(Optional) Restart the Dynamic Host Configuration Protocol process.

**dialer-services**—(J Series routers and EX Series switches only) (Optional) Restart the ISDN dial-out process.

**diameter-service**—(Optional) Restart the diameter process.

**disk-monitoring**—(Optional) Restart disk monitoring, which checks the health of the hard disk drive on the Routing Engine.

**dls**—(J Series routers and QFX Series only) (Optional) Restart the data link switching (DLSw) service.

**dot1x-protocol**—(EX Series switches only) (Optional) Restart the port-based network access control process.

**dynamic-flow-capture**—(Optional) Restart the dynamic flow capture (DFC) process, which controls DFC configurations on Monitoring Services III PICs.

**ecc-error-logging**—(Optional) Restart the error checking and correction (ECC) process, which logs ECC parity errors in memory on the Routing Engine.

**ethernet-connectivity-fault-management**—(Optional) Restart the process that provides IEEE 802.1ag Operation, Administration, and Management (OAM) connectivity fault management (CFM) database information for CFM maintenance association end points (MEPs) in a CFM session.

**ethernet-link-fault-management**—(EX Series switches and MX Series routers only) (Optional) Restart the process that provides the OAM link fault management (LFM) information for Ethernet interfaces.

**ethernet-switching**—(EX Series switches only) (Optional) Restart the Ethernet switching process.

**event-processing**—(Optional) Restart the event process (eventd).

**fibre-channel**—(QFX Series only) (Optional) Restart the Fibre Channel process.

**firewall**—(Optional) Restart the firewall management process, which manages the firewall configuration and enables accepting or rejecting packets that are transiting an interface on a router or switch.



**general-authentication-service**—(EX Series switches and MX Series routers only) (Optional) Restart the general authentication process.

**gracefully**—(Optional) Restart the software process.

**iccp-service**—(Optional) Restart the Inter-Chassis Communication Protocol (ICCP) process.

**idp-policy**—(Optional) Restart the intrusion detection and prevention (IDP) protocol process.

**immediately**—(Optional) Immediately restart the software process.

**interface-control**—(Optional) Restart the interface process, which controls the router's or switch's physical interface devices and logical interfaces.

**ipsec-key-management**—(Optional) Restart the IPsec key management process.

**isdn-signaling**—(J Series routers and QFX Series only) (Optional) Restart the ISDN signaling process, which initiates ISDN connections.

**kernel-replication**—(Optional) Restart the kernel replication process, which replicates the state of the backup Routing Engine when graceful Routing Engine switchover (GRES) is configured.

**l2-learning**—(Optional) Restart the Layer 2 address flooding and learning process.

**l2cpd-service**—(Optional) Restart the Layer 2 Control Protocol process, which enables features such as Layer 2 protocol tunneling and nonstop bridging.

**l2tp-service**—(M10, M10i, M7i, and MX Series routers only) (Optional) Restart the Layer 2 Tunneling Protocol (L2TP) process, which sets up client services for establishing Point-to-Point Protocol (PPP) tunnels across a network and negotiating Multilink PPP if it is implemented.

**l2tp-universal-edge**—(MX Series routers only) (Optional) Restart the L2TP process, which establishes L2TP tunnels and PPP sessions through L2TP tunnels.

**lACP**—(Optional) Restart the Link Aggregation Control Protocol (LACP) process. LACP provides a standardized means for exchanging information between partner systems on a link to allow their link aggregation control instances to reach agreement on the identity of the LAG to which the link belongs, and then to move the link to that LAG, and to enable the transmission and reception processes for the link to function in an orderly manner.

**lcc number**—(TX Matrix and TX Matrix Plus routers only) (Optional) For a TX Matrix router, restart the software process for a specific T640 router that is connected to the TX Matrix router. For a TX Matrix Plus router, restart the software process for a specific T1600 router that is connected to the TX Matrix Plus router. Replace **number** with a value from 0 through 3.

**license-service**—(EX Series switches only) (Optional) Restart the feature license management process.



**link-management**— (TX Matrix and TX Matrix Plus routers and EX Series switches only) (Optional) Restart the Link Management Protocol (LMP) process, which establishes and maintains LMP control channels.

**lldpd-service**— (EX Series switches only) (Optional) Restart the Link Layer Discovery Protocol (LLDP) process.

**local**— (MX Series routers only) (Optional) Restart the software process for the local Virtual Chassis member.

**local-policy-decision-function**— (Optional) Restart the process for the Local Policy Decision Function, which regulates collection of statistics related to applications and application groups and tracking of information about dynamic subscribers and static interfaces.

**mac-validation**— (Optional) Restart the Media Access Control (MAC) validation process, which configures MAC address validation for subscriber interfaces created on demux interfaces in dynamic profiles on MX Series routers.

**member *member-id***— (MX Series routers only) (Optional) Restart the software process for a specific member of the Virtual Chassis configuration. Replace *member-id* with a value of 0 or 1.

**mib-process**— (Optional) Restart the Management Information Base (MIB) version II process, which provides the router's MIB II agent.

**mobile-ip**— (Optional) Restart the Mobile IP process, which configures Junos OS Mobile IP features.

**mountd-service**— (EX Series switches and MX Series routers only) (Optional) Restart the service for NFS mount requests.

**mpls-traceroute**— (Optional) Restart the MPLS Periodic Traceroute process.

**mspd**— (Optional) Restart the Multiservice process.

**multicast-snooping**— (EX Series switches and MX Series routers only) (Optional) Restart the multicast snooping process, which makes Layer 2 devices, such as VLAN switches, aware of Layer 3 information, such as the media access control (MAC) addresses of members of a multicast group.

**named-service**— (Optional) Restart the DNS Server process, which is used by a router or a switch to resolve hostnames into addresses.

**network-access-service**— (J Series routers and QFX Series only) (Optional) Restart the network access process, which provides the router's Challenge Handshake Authentication Protocol (CHAP) authentication service.

**nfsd-service**— (Optional) Restart the Remote NFS Server process, which provides remote file access for applications that need NFS-based transport.



**packet-triggered-subscribers**—(Optional) Restart the packet-triggered subscribers and policy control (PTSP) process, which allows the application of policies to dynamic subscribers that are controlled by a subscriber termination device.

**peer-selection-service**—(Optional) Restart the Peer Selection Service process.

**pgcp-service**—(Optional) Restart the pgcpd service process running on the Routing Engine. This option does not restart pgcpd processes running on mobile station PICs. To restart pgcpd processes running on mobile station PICs, use the **services pgcp gateway** option.

**pgm**—(Optional) Restart the process that implements the Pragmatic General Multicast (PGM) protocol for assisting in the reliable delivery of multicast packets.

**pic-services-logging**—(Optional) Restart the logging process for some PICs. With this process, also known as fsad (the file system access daemon), PICs send special logging information to the Routing Engine for archiving on the hard disk.

**pki-service**—(Optional) Restart the PKI Service process.

**ppp**—(Optional) Restart the Point-to-Point Protocol (PPP) process, which is the encapsulation protocol process for transporting IP traffic across point-to-point links.

**ppp-service**—(Optional) Restart the Universal Edge PPP process, which is the encapsulation protocol process for transporting IP traffic across Universal Edge routers.

**pppoe**—(Optional) Restart the Point-to-Point Protocol over Ethernet (PPPoE) process, which combines PPP that typically runs over broadband connections with the Ethernet link-layer protocol that allows users to connect to a network of hosts over a bridge or access concentrator.

**protected-system-domain-service**—(Optional) Restart the Protected System Domain (PSD) process.

**redundancy-interface-process**—(Optional) Restart the ASP redundancy process.

**remote-operations**—(Optional) Restart the remote operations process, which provides the ping and traceroute MIBs.

**root-system-domain-service**—(Optional) Restart the Root System Domain (RSD) service.

**routing**—(ACX Series routers, QFX Series, EX Series switches, and MX Series routers only) (Optional) Restart the routing protocol process.

**routing <logical-system *logical-system-name*>**—(Optional) Restart the routing protocol process, which controls the routing protocols that run on the router or switch and maintains the routing tables. Optionally, restart the routing protocol process for the specified logical system only.

**sampling**—(Optional) Restart the sampling process, which performs packet sampling based on particular input interfaces and various fields in the packet header.



**sbcc-configuration-process**—(Optional) Restart the session border controller (SBC) process of the border signaling gateway (BSG).

**scc**—(TX Matrix routers only) (Optional) Restart the software process on the TX Matrix router (or switch-card chassis).

**sdk-service**—(Optional) Restart the SDK Service process, which runs on the Routing Engine and is responsible for communications between the SDK application and Junos OS. Although the SDK Service process is present on the router, it is turned off by default.

**secure-neighbor-discovery**—(QFX Series, EX Series switches, and MX Series routers only) (Optional) Restart the secure Neighbor Discovery Protocol (NDP) process, which provides support for protecting NDP messages.

**sfc number**—(TX Matrix Plus routers only) (Optional) Restart the software process on the TX Matrix Plus router (or switch-fabric chassis). Replace **number** with **0**.

**service-deployment**—(Optional) Restart the service deployment process, which enables Junos OS to work with the Session and Resource Control (SRC) software.

**services**—(Optional) Restart a service.

**services pgcp gateway gateway-name**—(Optional) Restart the pgcpd process for a specific border gateway function (BGF) running on an MS-PIC. This option does not restart the pgcpd process running on the Routing Engine. To restart the pgcpd process on the Routing Engine, use the **pgcp-service** option.

**sflow-service**—(EX Series switches only) (Optional) Restart the flow sampling (sFlow technology) process.

**snmp**—(Optional) Restart the SNMP process, which enables the monitoring of network devices from a central location and provides the router's or switch's SNMP master agent.

**soft**—(Optional) Reread and reactivate the configuration without completely restarting the software processes. For example, BGP peers stay up and the routing table stays constant. Omitting this option results in a graceful restart of the software process.

**static-subscribers**—(Optional) Restart the static subscribers process, which associates subscribers with statically configured interfaces and provides dynamic service activation and activation for these subscribers.

**statistics-service**—(Optional) Restart the process that manages the Packet Forwarding Engine statistics.

**subscriber-management**—(Optional) Restart the Subscriber Management process.

**subscriber-management-helper**—(Optional) Restart the Subscriber Management Helper process.

**tunnel-oamd**—(Optional) Restart the Tunnel OAM process, which enables the Operations, Administration, and Maintenance of Layer 2 tunneled networks. Layer 2 protocol



tunneling (L2PT) allows service providers to send Layer 2 PDUs across the provider's cloud and deliver them to Juniper Networks EX Series Ethernet Switches that are not part of the local broadcast domain.

**usb-control**—(J Series routers and MX Series routers only) (Optional) Restart the USB control process.

**vrrp**—(ACX Series routers, EX Series switches, and MX Series routers only) (Optional) Restart the Virtual Router Redundancy Protocol (VRRP) process, which enables hosts on a LAN to make use of redundant routing platforms on that LAN without requiring more than the static configuration of a single default route on the hosts.

**web-management**—(J Series routers, QFX Series, EX Series switches, and MX Series routers only) (Optional) Restart the Web management process.

**Required Privilege Level**

reset

**Related Documentation**

- [Overview of Junos OS CLI Operational Mode Commands on page 51](#)

**List of Sample Output** [restart interfaces on page 402](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request.

## Sample Output

[restart interfaces](#)

```
user@host> restart interfaces
interfaces process terminated
interfaces process restarted
```



## rollback

<b>Syntax</b>	<code>rollback &lt;number   rescue&gt;</code>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p>
<b>Description</b>	<p>Return to a previously committed configuration. The software saves the last 50 committed configurations, including the rollback number, date, time, and name of the user who issued the <b>commit</b> configuration command.</p> <p>The currently operational Junos OS configuration is stored in the file <b>juniper.conf</b>, and the last three committed configurations are stored in the files <b>juniper.conf.1</b>, <b>juniper.conf.2</b>, and <b>juniper.conf.3</b>. These four files are located in the directory <b>/config</b>, which is on the router's flash drive. The remaining 46 previous committed configurations, the files <b>juniper.conf.4</b> through <b>juniper.conf.49</b>, are stored in the directory <b>/var/db/config</b>, which is on the router's hard disk.</p> <p>During rollback, the configuration you specify is loaded from the associated file. Only objects in the rollback configuration that differ from the previously loaded configuration are marked as changed (equivalent to <b>load update</b>).</p>
<b>Options</b>	<p>none (Optional)—Return to the most recently saved configuration.</p> <p><b>number</b>—(Optional) Configuration to return to. The range of values is from <b>0</b> through <b>49</b>. The most recently saved configuration is number <b>0</b>, and the oldest saved configuration is number <b>49</b>. The default is <b>0</b>.</p> <p><b>rescue</b>—(Optional) Return to the rescue configuration.</p>
<b>Required Privilege Level</b>	rollback—To roll back to configurations other than the one most recently committed.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Returning to a Previously Committed Junos OS Configuration on page 1123</a></li> <li>• <a href="#">Creating and Returning to a Rescue Configuration on page 1118</a></li> </ul>



## save

---

**Syntax**    `save filename`

**QFX Series**    `save (dhcp-snooping filename)`

**Release Information**    Command introduced before Junos OS Release 7.4.  
Command introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Save the configuration to an ASCII file. The contents of the current level of the statement hierarchy (and below) are saved, along with the statement hierarchy containing it. This allows a section of the configuration to be saved, while fully specifying the statement hierarchy.

When saving a file to a remote system, the software uses the **scp/ssh** protocol.

**Options**    *filename*—Name of the saved file. You can specify a filename in one of the following ways:

- *filename*—File in the user's home directory (the current directory) on the local flash drive.
- *path/filename*—File on the local flash drive.
- */var/filename* or */var/path/filename*—File on the local hard disk.
- *a:filename* or *a:path/filename*—File on the local drive. The default path is */* (the root-level directory). The removable media can be in MS-DOS or UNIX (UFS) format.
- *hostname:/path/filename*, *hostname:filename*, *hostname:path/filename*, or *scp://hostname/path/filename*—File on an **scp/ssh** client. This form is not available in the worldwide version of Junos OS. The default path is the user's home directory on the remote system. You can also specify *hostname* as *username@hostname*.
- *ftp://hostname/path/filename*—File on an FTP server. You can also specify *hostname* as *username @hostname* or *username:password @hostname*. The default path is the user's home directory. To specify an absolute path, the path must start with the string **%2F**; for example, *ftp://hostname/%2Fpath/filename*. To have the system prompt you for the password, specify **prompt** in place of the password. If a password is required, and you do not specify the password or **prompt**, an error message is displayed:

```
user@host> file copy ftp://username@ftp.hostname.net//filename
file copy ftp.hostname.net: Not logged in.
user@host> file copy ftp://username:prompt@ftphostname.net//filename
```

Password for *username@ftp.hostname.net*:

- *http://hostname/path/filename*—File on a Hypertext Transfer Protocol (HTTP) server. You can also specify *hostname* as *username@hostname* or *username:password@hostname*. If a password is required and you omit it, you are prompted for it.
- *re0:/path/filename* or *re1:/path/filename*—File on a local Routing Engine.



**Required Privilege Level**    configure—To enter configuration mode.

**Related Documentation**    • Deactivating and Reactivating Statements and Identifiers in a Junos Configuration



## show chassis alarms

---

<b>Syntax</b>	show chassis alarms
<b>Syntax (TX Matrix Routers)</b>	show chassis alarms <lcc <i>number</i>   scc>
<b>Syntax (TX Matrix Plus Routers)</b>	show chassis alarms <lcc <i>number</i>   sfc <i>number</i> >
<b>Syntax (MX Series Routers)</b>	show chassis alarms <all-members> <local> <member <i>member-id</i> >
<b>Syntax (MX2010 3D Universal Edge Routers)</b>	show chassis alarms
<b>Syntax (MX2020 3D Universal Edge Routers)</b>	show chassis alarms
<b>Syntax (QFX Series)</b>	show chassis alarms <interconnect-device <i>name</i> > <node-device <i>name</i> >
<b>Syntax (PTX Series Packet Transport Switches)</b>	show chassis alarms
<b>Syntax (ACX Series Universal Access Routers)</b>	show chassis alarms
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. sfc option for the TX Matrix Plus router introduced in Junos OS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series. Command introduced in Junos OS Release 12.1 for the PTX Series Packet Transport Switches. Command introduced in Junos OS Release 12.2 for the ACX Series Universal Access Routers. Command introduced in Junos OS Release 12.3 for MX2020 3D Universal Edge Routers. Command introduced in Junos OS Release 12.3 for MX2010 3D Universal Edge Routers.
<b>Description</b>	Display information about the conditions that have been configured to trigger alarms.
<b>Options</b>	<b>none</b> —Display information about the conditions that have been configured to trigger alarms.



**all-members**—(MX Series routers only) (Optional) Display information about alarm conditions for all the member routers of the Virtual Chassis configuration.

**interconnect-device *name***—(QFabric systems only) (Optional) Display information about alarm conditions for the Interconnect device.

**lcc *number*** — (TX Matrix and TX Matrix Plus routers only) (Optional) On the TX Matrix router, show information about a specified T640 router (or line-card chassis) that is connected to the TX Matrix router. On the TX Matrix Plus router, show information about a specified T1600 router (or line-card chassis) that is connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.

**local**—(MX Series routers only) (Optional) Display information about alarm conditions for the local Virtual Chassis member.

**member *member-id***—(MX Series routers only) (Optional) Display information about alarm conditions for the specified member of the Virtual Chassis configuration. Replace ***member-id*** with a value of 0 or 1.

**node-device *name***—(QFabric systems only) (Optional) Display information about alarm conditions for the Node device.

**scc**—(TX Matrix router only) (Optional) Show information about the TX Matrix router (or switch-card chassis).

**sfc *number***—(TX Matrix Plus router only) (Optional) Show information about the TX Matrix Plus router (or switch-fabric chassis). Replace ***number*** with 0.

**Additional Information** You cannot clear the alarms for chassis components. Instead, you must remedy the cause of the alarm. When a chassis alarm is lit, it indicates that you are running the router or switch in a manner that we do not recommend.

On routers, you can manually silence external devices connected to the alarm relay contacts by pressing the alarm cutoff button, located on the craft interface. Silencing the device does not remove the alarm messages from the display (if present on the router) or extinguish the alarm LEDs. In addition, new alarms that occur after you silence an external device reactivate the external device.

In Junos OS release 11.1 and later, alarms for fans also show the slot number of the fans in the CLI output.

In Junos OS Release 11.2 and later, the command output on EX8200 switches shows the detailed location (**Plane/FPC/PFE**) for link errors in the chassis.

In Junos OS Release 10.2 and later, an alarm is shown on T Series routers for a standby sonic clock generator (SCG) that is offline or absent.

You may often see the following error messages, in which only the error code is shown and no other information is provided:

```
Apr 12 08:04:10 send: red alarm set, device FPC 6, reason FPC 6 Major Errors - Error code: 257
```



Apr 12 08:04:19 send: red alarm set, device FPC 1, reason FPC 1 Major Errors - Error code: 559

To understand what CM\_ALARM error codes mean, you need to first identify the structure of the CM\_ALARM code. A CM\_ALARM code has the following structure:

Bits:	Error type:
1-31	Major (1)
0	Minor (0)

As per the above table, the LSB (bit 0) identifies the **Error Type** (major alarm, if the bit is set and minor alarm if the bit is unset). The rest of the bits (1 - 31) identify the actual error code.

Take an example of the following error code, which was logged on a T1600:

Apr 12 08:04:10 send: red alarm set, device FPC 1, reason FPC 1 Major Errors - Error code: 559

First, you have to convert 559 to binary; that is **100010111**. The LSB in this case is 1, which means that this is a major alarm. After removing the LSB, you are left with **10001011**, which is equal to 279 in decimal. This is the actual error code, its meaning can be found from the following list:

Chip Type: L Chip	Code
CMALARM_LCHIP_LOUT_DESRD_PARITY_ERR	1
CMALARM_LCHIP_LOUT_DESRD_UNINIT_ERR	2
CMALARM_LCHIP_LOUT_DESRD_ILLEGALLINK_ERR	3
CMALARM_LCHIP_LOUT_DESRD_ILLEGALSIZERR	4
CMALARM_LCHIP_LOUT_HDRF_TOERR_ERR	5
CMALARM_LCHIP_LOUT_HDRF_PARITY_ERR	6
CMALARM_LCHIP_LOUT_HDRF_UCERR_ERR	7
CMALARM_LCHIP_LOUT_NLIF_CRCDROP_ERR	8
CMALARM_LCHIP_LOUT_NLIF_CRCERR_ERR	9
CMALARM_LCHIP_UCODE_TIMEOUT_ERR	10
CMALARM_LCHIP_LIN_SRCTL_ACCT_DROP_ERR	11
CMALARM_LCHIP_LIN_SRCTL_ACCT_ADDR_SIZE_ERR	12



CMALARM_LCHIP_SRAM_PARITY_ERR	13
CMALARM_LCHIP_UCODE_OVFLW_ERR	14
CMALARM_LCHIP_LOUT_HDRF_MTU_ERR	15
<hr/>	
<b>Chip Type: M Chip</b>	<b>Code</b>
CMALARM_MCHIP_ECC_UNCORRECT_ERR	128
<hr/>	
<b>Chip Type: N Chip</b>	<b>Code</b>
CMALARM_NCHIP_RDDMA_JBUS_TIMEOUT_ERR	256
CMALARM_NCHIP_RDDMA_FIFO_OVFLW_ERR	257
CMALARM_NCHIP_RDDMA_FIFO_UNFLW_ERR	258
CMALARM_NCHIP_RDDMA_SIZE_ERR	259
CMALARM_NCHIP_RDDMA_JBUS_CRC_ERR	260
CMALARM_NCHIP_WRDMA_PKTR_ERR	261
CMALARM_NCHIP_WRDMA_PKT_CRC_ERR	262
CMALARM_NCHIP_WRDMA_JBUS_TIMEOUT_ERR	263
CMALARM_NCHIP_WRDMA_FIFO_OVFLW_ERR	264
CMALARM_NCHIP_WRDMA_FIFO_UNFLW_ERR	265
CMALARM_NCHIP_WRDMA_PKT_LEN_ERR	266
CMALARM_NCHIP_WRDMA_JBUS_CRC_ERR	267
CMALARM_NCHIP_PKTR_DMA_AGE_ERR	268
CMALARM_NCHIP_PKTR_ICELLSIG_ERR	269
CMALARM_NCHIP_PKTR_FTTL_ERR	270
CMALARM_NCHIP_RODR_OFFSET_OVFLW_ERR	271
CMALARM_NCHIP_PKTR_TMO_CELL_ERR	272
CMALARM_NCHIP_PKTR_TMO_OUTRANGE_ERR	273
CMALARM_NCHIP_PKTR_MD_REQUEST_Q_OVFLW_ERR	274



CMALARM_NCHIP_PKTR_DMA_BUFFER_OVFLW_ERR	275
CMALARM_NCHIP_PKTR_GRT_OVFLW_ERR	276
CMALARM_NCHIP_FRQ_ERR	277
CMALARM_NCHIP_RODR_IN_Q_OVFLW_ERR	278
CMALARM_NCHIP_DBUF_CRC_ERR	279
<hr/>	
<b>Chip Type: R Chip</b>	<b>Code</b>
CMALARM_RCHIP_SRAM_PARITY_ERR	512
<hr/>	
<b>Chip Type: R Chip</b>	<b>Code</b>
CMALARM_ICHIP_WO_DESRD_ID_ERR	601
CMALARM_ICHIP_WO_DESRD_DATA_ERR	602
CMALARM_ICHIP_WO_DESRD_OFLOW_ERR	603
CMALARM_ICHIP_WO_HDRF_UCERR_ERR	604
CMALARM_ICHIP_WO_HDRF_MTUERR_ERR	605
CMALARM_ICHIP_WO_HDRF_PARITY_ERR	606
CMALARM_ICHIP_WO_HDRF_TOERR_ERR	607
CMALARM_ICHIP_WO_IP_CRC_ERR	608
CMALARM_ICHIP_WO_IP_INTER_ERR	609
CMALARM_ICHIP_WI_WAN_TIMEOUT_ERR	625
CMALARM_ICHIP_WI_FAB_TIMEOUT_ERR	626
CMALARM_ICHIP_RLDRAM_BIST_ERR	630
CMALARM_ICHIP_SDRAM_BIST_ERR	631
CMALARM_ICHIP_RLDRAM_PARITY_ERR	632
CMALARM_ICHIP_SDRAM_UNCORRECT_ERR	633
CMALARM_ICHIP_SDRAM_CORRECT_ERR	634
CMALARM_ICHIP_FUSE_DONE_ERR	635



According to the table above, the **279** error code corresponds to **CMALARM\_NCHIP\_DBUF\_CRC\_ERR**; this means that new CRC errors were seen on the NCHIP of this particular FPC, which is FPC as per the logs.

If you do not want to convert decimal to binary and vice-versa, you may use the following shortcut:

For major alarms, the **Actual Error Code = (Error Code - 1)/2**, where **Error Code** is the code that you get in the log message. For example, if you get the following log:

Apr 12 08:04:10 send: red alarm set, device FPC 6, reason FPC 6 Major Errors - Error code: 257

Actual Error Code =  $(257-1)/2 = 128$ . Similarly, for minor alarms, Actual Error Code =  $(\text{Error Code})/2$

**Required Privilege Level**

view

**Related Documentation**

- [Configuring an Alarm Entry and Its Attributes](#)
- [Chassis Conditions That Trigger Alarms](#)

**List of Sample Output**

[show chassis alarms \(Alarms Active\) on page 413](#)  
[show chassis alarms \(No Alarms Active\) on page 413](#)  
[show chassis alarms \(Fan Tray\) on page 413](#)  
[show chassis alarms \(MX2020 Router\) on page 413](#)  
[show chassis alarms \(MX2010 Router\) on page 413](#)  
[show chassis alarms \(T4000 Router\) on page 413](#)  
[show chassis alarms \(Unreachable Destinations Present on a T Series Router\) on page 413](#)  
[show chassis alarms \(FPC Offline Due to Unreachable Destinations on a T Series Router\) on page 414](#)  
[show chassis alarms \(SCG Absent on a T Series Router\) on page 415](#)  
[show chassis alarms \(Alarms Active on a TX Matrix Router\) on page 415](#)  
[show chassis alarms \(Alarms on a T4000 Router After the enhanced-mode Statement is Enabled\) on page 415](#)  
[show chassis alarms \(Backup Routing Engine\) on page 416](#)  
[show chassis alarms \(Alarms Active on the QFX Series\) on page 416](#)  
[show chassis alarms node-device \(Alarms Active on the QFabric System\) on page 416](#)  
[show chassis alarms \(Alarms Active on the QFabric System\) on page 417](#)  
[show chassis alarms \(Alarms Active on an EX8200 Switch\) on page 417](#)  
[show chassis alarms \(Alarms Active on a PTX5000 Packet Transport Switch\) on page 417](#)  
[show chassis alarms \(Alarms Active on an ACX2000 Universal Access Router\) on page 418](#)

**Output Fields**

[Table 35 on page 412](#) lists the output fields for the **show chassis alarms** command. Output fields are listed in the approximate order in which they appear.



**Table 35: show chassis alarms Output Fields**

Field Name	Field Description
<b>Alarm time</b>	Date and time the alarm was first recorded.
<b>Class</b>	Severity class for this alarm: <b>Minor</b> or <b>Major</b> .
<b>Description</b>	Information about the alarm.

---



## Sample Output

### show chassis alarms (Alarms Active)

```
user@host> show chassis alarms
3 alarms are currently active
Alarm time      Class  Description
2000-02-07 10:12:22 UTC Major fxp0: ethernet link down
2000-02-07 10:11:54 UTC Minor YELLOW ALARM - PEM 1 Removed
2000-02-07 10:11:03 UTC Minor YELLOW ALARM - Lower Fan Tray Removed
```

### show chassis alarms (No Alarms Active)

```
user@host> show chassis alarms
No alarms are currently active
```

### show chassis alarms (Fan Tray)

```
user@host> show chassis alarms
4 alarms currently active
Alarm time      Class  Description
2010-11-11 20:27:38 UTC Major Side Fan Tray 7 Failure
2010-11-11 20:27:13 UTC Minor Side Fan Tray 7 Overspeed
2010-11-11 20:27:13 UTC Major Side Fan Tray 5 Failure
2010-11-11 20:27:13 UTC Major Side Fan Tray 0 Failure
```

### show chassis alarms (MX2020 Router)

```
user@host> show chassis alarms
1 alarms currently active
Alarm time Class Description
2012-10-03 12:14:59 PDT Minor Plane 0 not online
```

### show chassis alarms (MX2010 Router)

```
user@host> show chassis alarms
7 alarms currently active
Alarm time      Class  Description
2012-08-07 00:46:06 PDT Major Fan Tray 2 Failure
2012-08-06 18:24:36 PDT Minor Redundant feed missing for PSM 6
2012-08-06 07:41:04 PDT Minor Redundant feed missing for PSM 8
2012-08-04 02:42:06 PDT Minor Redundant feed missing for PSM 5
2012-08-03 21:14:24 PDT Minor Loss of communication with Backup RE
2012-08-03 12:26:03 PDT Minor Redundant feed missing for PSM 4
2012-08-03 10:40:18 PDT Minor Redundant feed missing for PSM 7
```

### show chassis alarms (T4000 Router)

```
user@host> show chassis alarms
9 alarms currently active
Alarm time      Class  Description
2007-06-02 01:41:10 UTC Minor RE 0 Not Supported
2007-06-02 01:41:10 UTC Minor CB 0 Not Supported
2007-06-02 01:41:10 UTC Minor Mixed Master and Backup RE types
2007-05-30 19:37:33 UTC Major SPMB 1 not online
2007-05-30 19:37:29 UTC Minor Front Bottom Fan Tray Absent
2007-05-30 19:37:13 UTC Major PEM 1 Input Failure
2007-05-30 19:37:13 UTC Major PEM 0 Not OK
2007-05-30 19:37:03 UTC Major PEM 0 Improper for Platform
2007-05-30 19:37:03 UTC Minor Backup RE Active
```

### show chassis alarms (Unreachable)

```
user@host> show chassis alarms
10 alarms currently active
Alarm time      Class  Description
```



### Destinations Present on a T Series Router)

```

2011-08-30 18:43:53 PDT Major FPC 7 has unreachable destinations
2011-08-30 18:43:53 PDT Major FPC 5 has unreachable destinations
2011-08-30 18:43:52 PDT Major FPC 3 has unreachable destinations
2011-08-30 18:43:52 PDT Major FPC 2 has unreachable destinations
2011-08-30 18:43:52 PDT Minor SIB 0 Not Online
2011-08-30 18:43:33 PDT Minor SIB 4 Not Online
2011-08-30 18:43:28 PDT Minor SIB 3 Not Online
2011-08-30 18:43:05 PDT Minor SIB 2 Not Online
2011-08-30 18:43:28 PDT Minor SIB 1 Not Online
2011-08-30 18:43:05 PDT Major PEM 1 Not Ok
    
```

### show chassis alarms (FPC Offline Due to Unreachable

```

user@host> show chassis alarms
10 alarms currently active
Alarm time          Class Description
2011-08-30 18:43:53 PDT Major FPC 7 offline due to unreachable destinations
    
```



**Destinations on a T Series Router)**

```

2011-08-30 18:43:53 PDT Major FPC 5 offline due to unreachable destinations
2011-08-30 18:43:52 PDT Major FPC 3 offline due to unreachable destinations
2011-08-30 18:43:52 PDT Major FPC 2 offline due to unreachable destinations
2011-08-30 18:43:52 PDT Minor SIB 0 Not Online
2011-08-30 18:43:33 PDT Minor SIB 4 Not Online
2011-08-30 18:43:28 PDT Minor SIB 3 Not Online
2011-08-30 18:43:05 PDT Minor SIB 2 Not Online
2011-08-30 18:43:28 PDT Minor SIB 1 Not Online
2011-08-30 18:43:05 PDT Major PEM 1 Not Ok

```

**show chassis alarms (SCG Absent on a T Series Router)**

```

user@host> show chassis alarms
4 alarms currently active
Alarm time          Class Description
2011-01-23 21:42:46 PST Major SCG 0 NO EXT CLK MEAS-BKUP SCG ABS

```

**show chassis alarms (Alarms Active on a TX Matrix Router)**

```

user@host> show chassis alarms
scc-re0:
-----
8 alarms currently active
Alarm time          Class Description
2004-08-05 18:43:53 PDT Minor LCC 0 Minor Errors
2004-08-05 18:43:53 PDT Minor SIB 3 Not Online
2004-08-05 18:43:52 PDT Major SIB 2 Absent
2004-08-05 18:43:52 PDT Major SIB 1 Absent
2004-08-05 18:43:52 PDT Major SIB 0 Absent
2004-08-05 18:43:33 PDT Major LCC 2 Major Errors
2004-08-05 18:43:28 PDT Major LCC 0 Major Errors
2004-08-05 18:43:05 PDT Minor LCC 2 Minor Errors
lcc0-re0:
-----
5 alarms currently active
Alarm time          Class Description
2004-08-05 18:43:53 PDT Minor SIB 3 Not Online
2004-08-05 18:43:49 PDT Major SIB 2 Absent
2004-08-05 18:43:49 PDT Major SIB 1 Absent
2004-08-05 18:43:49 PDT Major SIB 0 Absent
2004-08-05 18:43:28 PDT Major PEM 0 Not OK
lcc2-re0:
-----
5 alarms currently active
Alarm time          Class Description
2004-08-05 18:43:35 PDT Minor SIB 3 Not Online
2004-08-05 18:43:33 PDT Major SIB 2 Absent
2004-08-05 18:43:33 PDT Major SIB 1 Absent
2004-08-05 18:43:33 PDT Major SIB 0 Absent
2004-08-05 18:43:05 PDT Minor PEM 1 Absent

```

**show chassis alarms (Alarms on a T4000 Router After the**

On T4000 routers, when you include the **enhanced-mode** statement at the **[edit chassis network-services]** hierarchy level and reboot the system, only the T4000 Type 5 FPCs present on the router are online while the remaining FPCs are offline, and FPC misconfiguration alarms are generated. The **show chassis alarm** command output displays



**enhanced-mode  
Statement is Enabled)**

FPC misconfiguration (**FPC *fpc-slot* misconfig**) as the reason for the generation of the alarms.

```
user@host> show chassis alarms
2 alarms currently active
Alarm time           Class  Description
2011-10-22 10:10:47 PDT Major  FPC 1 misconfig
2011-10-22 10:10:46 PDT Major  FPC 0 misconfig
```

**show chassis alarms  
(Backup Routing  
Engine)**

```
user@host> show chassis alarms
2 alarms are currently active
Alarm time           Class  Description
2005-04-07 10:12:22 PDT Minor  Host 1 Boot from alternate media
2005-04-07 10:11:54 PDT Major  Host 1 compact-flash missing in Boot List
```

**show chassis alarms  
(Alarms Active on the  
QFX Series)**

```
user@switch> show chassis alarms
1 alarms currently active
Alarm time           Class  Description
2012-03-05 2:10:24 UTC Major  FPC 0 PEM 0 Airflow not matching Chassis Airflow
```

**show chassis alarms  
node-device (Alarms**

```
user@switch> show chassis alarms node-device ED3691
node-device ED3694
3 alarms currently active
```



## Active on the QFabric System)

Alarm time	Class	Description
2011-08-24 16:04:15 UTC	Major	ED3694:fte-0/1/2: Link down
2011-08-24 16:04:14 UTC	Major	ED3694:fte-0/1/0: Link down
2011-08-24 14:21:14 UTC	Major	ED3694 PEM 0 is not supported/powered

show chassis alarms  
(Alarms Active on the QFabric System)

```
user@switch> show chassis alarms
IC-A0001:
```

```
-----
1 alarms currently active
Alarm time      Class  Description
2011-08-24 16:04:15 UTC  Minor  Backup RE Active
```

```
ED3694:
```

```
-----
3 alarms currently active
Alarm time      Class  Description
2011-08-24 16:04:15 UTC  Major  ED3694:fte-0/1/2: Link down
2011-08-24 16:04:14 UTC  Major  ED3694:fte-0/1/0: Link down
2011-08-24 14:21:14 UTC  Major  ED3694 PEM 0 is not supported/powered
```

```
SNG-0:
```

```
NW-NG-0:
```

```
-----
1 alarms currently active
Alarm time      Class  Description
2011-08-24 15:49:27 UTC  Major  ED3691 PEM 0 is not supported/powered
```

show chassis alarms  
(Alarms Active on an EX8200 Switch)

```
user@switch> show chassis alarms
```

```
6 alarms currently active
Alarm time      Class  Description
2010-12-02 19:15:22 UTC  Major  Fan Tray Failure
2010-12-02 19:15:22 UTC  Major  Fan Tray Failure
2010-12-02 19:15:14 UTC  Minor  Check CB 0 Fabric Chip 1 on Plane/FPC/PFE: 1/5/0,
1/5/1, 1/5/2, 1/5/3, 1/7/0, 1/7/1, 1/7/2, 1/7/3, 2/5/0, 2/5/1, ...
2010-12-02 19:15:14 UTC  Minor  Check CB 0 Fabric Chip 0 on Plane/FPC/PFE: 1/5/0,
1/5/1, 1/5/2, 1/5/3, 1/7/0, 1/7/1, 1/7/2, 1/7/3, 2/5/0, 2/5/1, ...
2010-12-02 19:14:18 UTC  Major  PSU 1 Output Failure
2010-12-02 19:14:18 UTC  Minor  Loss of communication with Backup RE
```

show chassis alarms  
(Alarms Active on a

```
user@switch> show chassis alarms
```

```
23 alarms currently active
```



**PTX5000 Packet  
Transport Switch)**

Alarm time		Class	Description
2011-07-12 16:22:05 PDT	Minor	No Redundant Power for Rear Chassis	
2011-07-12 16:22:05 PDT	Major	PDU 0 PSM 1 Not OK	
2011-07-12 16:21:57 PDT	Minor	No Redundant Power for Fan 0-2	
2011-07-12 16:21:57 PDT	Major	PDU 0 PSM 0 Not OK	
2011-07-12 15:56:06 PDT	Major	PDU 1 PSM 2 Not OK	
2011-07-12 15:56:06 PDT	Minor	No Redundant Power for FPC 0-7	
2011-07-12 15:56:06 PDT	Major	PDU 0 PSM 3 Not OK	
2011-07-12 15:28:20 PDT	Major	PDU 0 PSM 2 Not OK	
2011-07-12 15:19:14 PDT	Minor	Backup RE Active	

**show chassis alarms  
(Alarms Active on an  
ACX2000 Universal  
Access Router)**

```
user@host> show chassis alarms
7 alarms currently active
Alarm time      Class  Description
2012-05-22 11:19:09 UTC Major  xe-0/3/1: Link down
2012-05-22 11:19:09 UTC Major  xe-0/3/0: Link down
2012-05-22 11:19:09 UTC Major  ge-0/1/7: Link down
2012-05-22 11:19:09 UTC Major  ge-0/1/6: Link down
2012-05-22 11:19:09 UTC Major  ge-0/1/3: Link down
2012-05-22 11:19:09 UTC Major  ge-0/1/2: Link down
2012-05-22 11:19:09 UTC Major  ge-0/1/1: Link down
```



## show chassis beacon

<b>show chassis beacon (QFX Series)</b>	<pre>show chassis beacon &lt;cb slot-number&gt; &lt;fpc slot-number&gt; &lt;interconnect-device name (cb slot-number   fpc slot-number)&gt; &lt;node-device name&gt;</pre>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the beacon LED status on a QFX3500 standalone switch, Node device, and an Interconnect device. You can also display the beacon LED status of the Control Boards and Flexible PIC Concentrators on the Interconnect device.
<b>Options</b>	<p><b>cb slot-number</b>— (QFabric systems only) (Optional) Display the status of the beacon LEDs for the Control Board on the Interconnect device.</p> <p><b>fpc slot-number</b>— (QFabric systems only) (Optional) Display the status of the beacon LEDs for the Flexible PIC Concentrator (FPC) on the Interconnect device. (QFX3500 switches only) (Optional) Display the status of the beacon LEDs for the Flexible PIC Concentrator on the standalone switch.</p> <p><b>interconnect-device name</b>— (QFabric systems only) (Optional) Display the status of the beacon LEDs for the Interconnect device.</p> <p><b>node-device name</b>— (QFabric systems only) (Optional) Display the status of the beacon LEDs for the Node device.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">request chassis beacon on page 315</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show chassis beacon (QFX Series) on page 420</a> <a href="#">show chassis beacon interconnect-device (QFabric System) on page 420</a> <a href="#">show chassis beacon interconnect-device fpc (QFabric System) on page 420</a> <a href="#">show chassis beacon node-device (QFabric System) on page 420</a> <a href="#">show chassis beacon node-device fpc (QFabric System) on page 420</a>
<b>Output Fields</b>	<a href="#">Table 36 on page 419</a> lists the output fields for the <b>show chassis beacon</b> command. Output fields are listed in the approximate order in which they appear.

Table 36: show chassis led Output Fields

Field Name	Field Description
Slot	FPC slot number of the device whose content is being displayed. On QFX3500 standalone switches, the number is always 0.



Table 36: show chassis led Output Fields (*continued*)

Field Name	Field Description
Beacon State	Status of the beacon state: <ul style="list-style-type: none"> <li>Off—The beacon is <b>OFF</b>.</li> <li>On—The beacon is <b>ON</b>.</li> </ul>

### Sample Output

**show chassis beacon**  
(QFX Series)

```
user@switch> show chassis beacon
Slot          Beacon State
FPC           0          OFF
```

**show chassis beacon**  
**interconnect-device**  
(QFabric System)

```
user@switch> show chassis beacon interconnect-device interconnect1
Chassis          OFF
CB 0             OFF
CB 1             OFF
FC 0 FPC 0       OFF
FC 1 FPC 1       OFF
RC 0 FPC 8       OFF
RC 1 FPC 9       OFF
```

**show chassis beacon**  
**interconnect-device**  
**fpc** (QFabric System)

```
user@switch> show chassis beacon interconnect-device interconnect1 fpc 0
FPC 0          ON
```

**show chassis beacon**  
**node-device** (QFabric System)

```
user@switch> show chassis beacon node-device node1
node1          ON
```

**show chassis beacon**  
**node-device fpc**  
(QFabric System)

```
user@switch> show chassis beacon node-device node1 fpc 0
FPC 0          ON
```



## show chassis ethernet-switch interconnect-device fpc

<b>Syntax</b>	show chassis ethernet-switch interconnect-device <i>name</i> fpc <detail> <port <i>number</i> > <slot <i>number</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	(QFX3000-G QFabric systems only) Display Ethernet switch information for the front card Flexible Port Concentrators (FPCs) in an Interconnect device.
<b>Options</b>	<p><b>none</b>—Display Ethernet switch information about each connected port on each online FPC in the Interconnect device.</p> <p><b>detail</b>—(Optional) Display detailed status information for all FPCs or for the FPC in the specified slot in the Interconnect device.</p> <p><b>port <i>number</i></b>—(Optional) Display Ethernet switch information about a specific port on an FPC in the Interconnect device.</p> <p><b>slot <i>number</i></b>—(Optional) Display Ethernet switch information about an FPC in a specific slot in the Interconnect device.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show chassis ethernet-switch interconnect-device fpc on page 424</a> <a href="#">show chassis ethernet-switch interconnect-device fpc detail on page 427</a> <a href="#">show chassis ethernet-switch fpc detail slot on page 434</a> <a href="#">show chassis ethernet-switch fpc interconnect-device port on page 441</a> <a href="#">show chassis ethernet-switch fpc interconnect-device detail port on page 443</a>
<b>Output Fields</b>	Table 37 on page 421 lists the output fields for the <b>show chassis ethernet-switch interconnect-device fpc</b> command. Output fields are listed in the approximate order in which they appear.

**Table 37: show chassis ethernet-switch interconnect-device fpc Output Fields**

Field Name	Field Description
Link is good on port n connected to device	Information about the link between each port on the FPC's Ethernet switch and one of the following devices: <ul style="list-style-type: none"> <li>• FWD-SWITCH-0</li> <li>• FWD-SWITCH-1</li> <li>• CB0</li> <li>• CB1</li> </ul>
Speed is	Speed at which the Ethernet link is running: <b>10 Mb</b> When the device is <b>RE</b> or <b>Other RE</b> on the TX Matrix router, the speed is <b>1000 Mb</b> .



Table 37: show chassis ethernet-switch interconnect-device fpc Output Fields (*continued*)

Field Name	Field Description
Duplex is	Duplex type of the Ethernet link: <b>full</b> or <b>half</b> .
Autonegotiate is Enabled (or Disabled)	By default, built-in Fast Ethernet ports on a PIC autonegotiate whether to operate at 10 Mbps or 100 Mbps. All other interfaces automatically choose the correct speed based on the PIC type and whether the PIC is configured to operate in multiplexed mode (using the <b>no-concatenate</b> statement at the <b>[edit chassis]</b> hierarchy level, as described in the <i>Junos OS System Basics Configuration Guide</i> ).
TX Octets	Number of octets sent.
TX Packets 64 Octets	Number of transmitted frames of size 64 octets.
TX Packets 65-127 Octets	Number of transmitted frames of size 65 through 127 octets.
TX Packets 128-255 Octets	Number of transmitted frames of size 128 through 255 octets.
TX Packets 256-511 Octets	Number of transmitted frames of size 256 through 511 octets.
TX Packets 512-1023 Octets	Number of transmitted frames of size 512 through 1023 octets.
TX Packets 1024-1518 Octets	Number of transmitted frames of size 1024 through 1518 octets.
TX Packets 1519-2047 Octets	Number of transmitted frames of size 1519 through 2047 octets.
TX Packets 2048-4095 Octets	Number of transmitted frames of size 2048 through 4095 octets.
TX Packets 4096-9216 Octets	Number of transmitted frames of size 4096 through 9216 octets.
TX Packets 9217-16383 Octets	Number of transmitted frames of size 9217 through 16383 octets.
TX Multicast packets	Number of multicast packets sent.
TX Broadcast packets	Number of broadcast packets sent.
TX Single Collision frames	Number of packets sent after one collision.
TX Mult. Collision frames	Number of packets sent after multiple collisions.
TX Late Collision Frames	Number of packets aborted during sending because of collisions after 64 bytes.



Table 37: show chassis ethernet-switch interconnect-device fpc Output Fields (*continued*)

Field Name	Field Description
TX Excessive collisions	Number of packets not sent because of too many collisions.
TX Collision frames	Number of collision packets sent.
TX PAUSEMAC Ctrl Frames	Number of Media Access Control (MAC) frames containing PAUSE commands sent.
TX MAC ctrl frames	Number of MAC control packets sent.
TX Frame deferred Xmns	Number of frames deferred in x milliseconds.
TX Oversize Packets	Number of oversized packets sent.
TX Jabbers	Total number of frames sent that exceed the maximum byte count and contain CRC errors .
TX FCS Error Counter	Number of packets discarded because of frame check sequence errors.
TX Fragment Counter	Number of fragmented packets sent.
TX Byte Counter	Number of bytes sent.
RX Octets	Number of octets received.
RX Packets 64 Octets	Number of received packets of size 64 octets.
RX Packets 65-127 Octets	Number of received packets of size 65 through 127 octets.
RX Packets 128-255 Octets	Number of received packets of size 128 through 255 octets.
RX Packets 256-511 Octets	Number of received packets of size 256 through 511 octets.
RX Packets 512-1023 Octets	Number of received packets of size 512 through 1023 octets.
RX Packets 1024-1518 Octets	Number of received packets of size 65 through 127 octets.
RX Packets 1519-2047 Octets	Number of received packets of size 1519 through 2047 octets.
RX Packets 2048-4095 Octets	Number of received packets of size 2048 through 4095 octets.
RX Packets 4096-9216 Octets	Number of received packets of size 4096 through 9216 octets.



Table 37: show chassis ethernet-switch interconnect-device fpc Output Fields (*continued*)

Field Name	Field Description
RX Multicast Packets	Number of multicast packets received.
RX Broadcast Packets	Number of broadcast packets received.
RX FCS Errors	Number of packets discarded because of frame check sequence errors.
RX Align Errors	Number of incomplete octets received.
RX Fragments	Number of fragmented packets received.
RX Symbol errors	Number of symbols received that the router did not correctly decode.
RX Unsupported opcodes	Number of packets received with unsupported op codes.
RX Out of Range Length	Number of packets received with an out of range length.
RX False Carrier Errors	Number of packets received with false carrier errors.
RX Undersize Packets	Number of undersized packets received.
RX Oversize Packets	Number of oversized packets received.
RX Jabbers	Total number of frames received that exceed the maximum byte count and contain CRC errors .
RX 1519-1522 Good Vlan frms	Number of transmitted frames of size 1519 through 1522 octets that are good VLAN frames.
RX MTU Exceed Counter	Number of packets received that exceed the MTU.
RX Control Frame Counter	Number of control frames received.
RX Pause Frame Counter	Number of pause frames received.
RX Byte Counter	Number of bytes received.

## Sample Output

**show chassis  
ethernet-switch**

```
user@qfabric> show chassis ethernet-switch interconnect-device IC-WS001 fpc
Summary for switch on FC0
Link is good on GE port 2 connected to device: FWD-SWITCH-0
```



## interconnect-device fpc

```
Speed is 1000Mb
Duplex is full
Autonegotiate is Disabled
Flow Control TX is Disabled
Flow Control RX is Disabled
TX Octets          124638
RX Octets          86496
```

Link is good on GE port 4 connected to device: FWD-SWITCH-1

```
Speed is 1000Mb
Duplex is full
Autonegotiate is Disabled
Flow Control TX is Disabled
Flow Control RX is Disabled
TX Octets          82191
RX Octets          58979
```

Link is good on XE port 28 connected to device: CB0

```
Speed is 10000Mb
Duplex is full
Autonegotiate is Enabled
Flow Control TX is Disabled
Flow Control RX is Disabled
TX Octets          145475
RX Octets          206828
```

Link is good on XE port 29 connected to device: CB1

```
Speed is 10000Mb
Duplex is full
Autonegotiate is Enabled
Flow Control TX is Disabled
Flow Control RX is Disabled
TX Octets          1
RX Octets          0
```

Summary for switch on FC1

Link is good on GE port 2 connected to device: FWD-SWITCH-0

```
Speed is 1000Mb
Duplex is full
Autonegotiate is Disabled
Flow Control TX is Disabled
Flow Control RX is Disabled
TX Octets          82290
RX Octets          59443
```

Link is good on GE port 4 connected to device: FWD-SWITCH-1

```
Speed is 1000Mb
Duplex is full
Autonegotiate is Disabled
Flow Control TX is Disabled
Flow Control RX is Disabled
TX Octets          40900
RX Octets          30013
```

Link is good on XE port 28 connected to device: CB0

```
Speed is 10000Mb
Duplex is full
Autonegotiate is Enabled
Flow Control TX is Disabled
Flow Control RX is Disabled
TX Octets          89456
```



RX Octets 123189

Link is good on XE port 29 connected to device: CB1

Speed is 10000Mb

Duplex is full

Autonegotiate is Enabled

Flow Control TX is Disabled

Flow Control RX is Disabled

TX Octets 1

RX Octets 0

root@qfabric> show chassis ethernet-switch interconnect-device IC-WS001 fpc

Summary for switch on FC0

Link is good on GE port 2 connected to device: FWD-SWITCH-0

Speed is 1000Mb

Duplex is full

Autonegotiate is Disabled

Flow Control TX is Disabled

Flow Control RX is Disabled

TX Octets 124697

RX Octets 86535

Link is good on GE port 4 connected to device: FWD-SWITCH-1

Speed is 1000Mb

Duplex is full

Autonegotiate is Disabled

Flow Control TX is Disabled

Flow Control RX is Disabled

TX Octets 82229

RX Octets 59009

Link is good on XE port 28 connected to device: CB0

Speed is 10000Mb

Duplex is full

Autonegotiate is Enabled

Flow Control TX is Disabled

Flow Control RX is Disabled

TX Octets 145544

RX Octets 206925

Link is good on XE port 29 connected to device: CB1

Speed is 10000Mb

Duplex is full

Autonegotiate is Enabled

Flow Control TX is Disabled

Flow Control RX is Disabled

TX Octets 1

RX Octets 0

Summary for switch on FC1

Link is good on GE port 2 connected to device: FWD-SWITCH-0

Speed is 1000Mb

Duplex is full

Autonegotiate is Disabled

Flow Control TX is Disabled

Flow Control RX is Disabled

TX Octets 82327

RX Octets 59472

Link is good on GE port 4 connected to device: FWD-SWITCH-1

Speed is 1000Mb



```
Duplex is full
Autonegotiate is Disabled
Flow Control TX is Disabled
Flow Control RX is Disabled
TX Octets          40918
RX Octets          30028
```

```
Link is good on XE port 28 connected to device: CB0
Speed is 10000Mb
Duplex is full
Autonegotiate is Enabled
Flow Control TX is Disabled
Flow Control RX is Disabled
TX Octets          89500
RX Octets          123244
```

```
Link is good on XE port 29 connected to device: CB1
Speed is 10000Mb
Duplex is full
Autonegotiate is Enabled
Flow Control TX is Disabled
Flow Control RX is Disabled
TX Octets          1
RX Octets          0
```

`show chassis`  
`ethernet-switch`

```
user@host> show chassis ethernet-switch interconnect-device IC-WS001 fpc detail
Port statistics for FC0 switch
Statistics for port 2 connected to device FWD-SWITCH-0:
```



interconnect-device  
fpc detail

TX Packets 64 Octets	0
TX Packets 65-127 Octets	1
TX Packets 128-255 Octets	121716
TX Packets 256-511 Octets	2200
TX Packets 512-1023 Octets	823
TX Packets 1024-1518 Octets	2
TX Packets 1519-2047 Octets	0
TX Packets 2048-4095 Octets	0
TX Packets 4096-9216 Octets	0
TX 1519-1522 Good Vlan frms	0
TX Octets	124742
TX Multicast Packets	0
TX Broadcast Packets	1
TX Single Collision frames	0
TX Mult. Collision frames	0
TX Late Collisions	0
TX Excessive Collisions	0
TX Collision frames	0
TX PAUSEMAC Ctrl Frames	0
TX MAC ctrl frames	0
TX Frame deferred Xtns	0
TX Frame excessive deferl	0
TX Oversize Packets	0
TX Jabbers	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	27391588
RX Packets 64 Octets	0
RX Packets 65-127 Octets	0
RX Packets 128-255 Octets	85924
RX Packets 256-511 Octets	555
RX Packets 512-1023 Octets	86
RX Packets 1024-1518 Octets	1
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Octets	86566
RX Multicast Packets	0
RX Broadcast Packets	0
RX FCS Errors	0
RX Align Errors	0
RX Fragments	0
RX Symbol errors	0
RX Unsupported opcodes	0
RX Out of Range Length	0
RX False Carrier Errors	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX 1519-1522 Good Vlan frms	0
RX MTU Exceed Counter	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	20380581
Statistics for port 4 connected to device FWD-SWITCH-1:	
TX Packets 64 Octets	0
TX Packets 65-127 Octets	1
TX Packets 128-255 Octets	80374
TX Packets 256-511 Octets	1347
TX Packets 512-1023 Octets	532
TX Packets 1024-1518 Octets	3



```

TX Packets 1519-2047 Octets 0
TX Packets 2048-4095 Octets 0
TX Packets 4096-9216 Octets 0
TX 1519-1522 Good Vlan frms 0
TX Octets 82257
TX Multicast Packets 0
TX Broadcast Packets 1
TX Single Collision frames 0
TX Mult. Collision frames 0
TX Late Collisions 0
TX Excessive Collisions 0
TX Collision frames 0
TX PAUSEMAC Ctrl Frames 0
TX MAC ctrl frames 0
TX Frame deferred Xtns 0
TX Frame excessive deferl 0
TX Oversize Packets 0
TX Jabbers 0
TX FCS Error Counter 0
TX Fragment Counter 0
TX Byte Counter 18146746
RX Packets 64 Octets 0
RX Packets 65-127 Octets 0
RX Packets 128-255 Octets 58410
RX Packets 256-511 Octets 522
RX Packets 512-1023 Octets 96
RX Packets 1024-1518 Octets 2
RX Packets 1519-2047 Octets 0
RX Packets 2048-4095 Octets 0
RX Packets 4096-9216 Octets 0
RX Octets 59030
RX Multicast Packets 0
RX Broadcast Packets 0
RX FCS Errors 0
RX Align Errors 0
RX Fragments 0
RX Symbol errors 0
RX Unsupported opcodes 0
RX Out of Range Length 0
RX False Carrier Errors 0
RX Undersize Packets 0
RX Oversize Packets 0
RX Jabbers 0
RX 1519-1522 Good Vlan frms 0
RX MTU Exceed Counter 0
RX Control Frame Counter 0
RX Pause Frame Counter 0
RX Byte Counter 13882179
Statistics for port 28 connected to device CB0:
TX Packets 64 Octets 0
TX Packets 65-127 Octets 0
TX Packets 128-255 Octets 144334
TX Packets 256-511 Octets 1077
TX Packets 512-1023 Octets 182
TX Packets 1024-1518 Octets 3
TX Packets 1519-2047 Octets 0
TX Packets 2048-4095 Octets 0
TX Packets 4096-9216 Octets 0
TX Packets 9217-16383 Octets 0
TX Octets 145596
TX Multicast Packets 0

```



TX Broadcast Packets	0
TX PAUSEMAC Ctrl Frames	0
TX Oversize Packets	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	34262760
RX Packets 64 Octets	0
RX Packets 65-127 Octets	1
RX Packets 128-255 Octets	202090
RX Packets 256-511 Octets	3547
RX Packets 512-1023 Octets	1355
RX Packets 1024-1518 Octets	5
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Packets 9217-16383 Octets	0
RX Octets	206998
RX Multicast Packets	0
RX Broadcast Packets	1
RX FCS Errors	0
RX Fragments	0
RX MAC Control Packets	0
RX Out of Range Length	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	45538262

Statistics for port 29 connected to device CB1:

TX Packets 64 Octets	0
TX Packets 65-127 Octets	1
TX Packets 128-255 Octets	0
TX Packets 256-511 Octets	0
TX Packets 512-1023 Octets	0
TX Packets 1024-1518 Octets	0
TX Packets 1519-2047 Octets	0
TX Packets 2048-4095 Octets	0
TX Packets 4096-9216 Octets	0
TX Packets 9217-16383 Octets	0
TX Octets	1
TX Multicast Packets	0
TX Broadcast Packets	1
TX PAUSEMAC Ctrl Frames	0
TX Oversize Packets	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	72
RX Packets 64 Octets	0
RX Packets 65-127 Octets	0
RX Packets 128-255 Octets	0
RX Packets 256-511 Octets	0
RX Packets 512-1023 Octets	0
RX Packets 1024-1518 Octets	0
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Packets 9217-16383 Octets	0
RX Octets	0
RX Multicast Packets	0
RX Broadcast Packets	0



RX FCS Errors	0
RX Fragments	0
RX MAC Control Packets	0
RX Out of Range Length	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	0

## Port statistics for FC1 switch

Statistics for port 2 connected to device FWD-SWITCH-0:

TX Packets 64 Octets	0
TX Packets 65-127 Octets	1
TX Packets 128-255 Octets	80560
TX Packets 256-511 Octets	1279
TX Packets 512-1023 Octets	514
TX Packets 1024-1518 Octets	3
TX Packets 1519-2047 Octets	0
TX Packets 2048-4095 Octets	0
TX Packets 4096-9216 Octets	0
TX 1519-1522 Good Vlan frms	0
TX Octets	82357
TX Multicast Packets	0
TX Broadcast Packets	1
TX Single Collision frames	0
TX Mult. Collision frames	0
TX Late Collisions	0
TX Excessive Collisions	0
TX Collision frames	0
TX PAUSEMAC Ctrl Frames	0
TX MAC ctrl frames	0
TX Frame deferred Xms	0
TX Frame excessive deferl	0
TX Oversize Packets	0
TX Jabbers	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	18059906
RX Packets 64 Octets	0
RX Packets 65-127 Octets	0
RX Packets 128-255 Octets	58733
RX Packets 256-511 Octets	639
RX Packets 512-1023 Octets	119
RX Packets 1024-1518 Octets	3
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Octets	59494
RX Multicast Packets	0
RX Broadcast Packets	0
RX FCS Errors	0
RX Align Errors	0
RX Fragments	0
RX Symbol errors	0
RX Unsupported opcodes	0
RX Out of Range Length	0
RX False Carrier Errors	0
RX Undersize Packets	0
RX Oversize Packets	0



```
RX Jabbers                                0
RX 1519-1522 Good Vlan frms              0
RX MTU Exceed Counter                    0
RX Control Frame Counter                  0
RX Pause Frame Counter                    0
RX Byte Counter                           13994432
Statistics for port 4 connected to device FWD-SWITCH-1:
TX Packets 64 Octets                      0
TX Packets 65-127 Octets                  1
TX Packets 128-255 Octets                 39971
TX Packets 256-511 Octets                 668
TX Packets 512-1023 Octets                290
TX Packets 1024-1518 Octets               3
TX Packets 1519-2047 Octets               0
TX Packets 2048-4095 Octets               0
TX Packets 4096-9216 Octets               0
TX 1519-1522 Good Vlan frms              0
TX Octets                                 40933
TX Multicast Packets                      0
TX Broadcast Packets                      1
TX Single Collision frames                0
TX Mult. Collision frames                 0
TX Late Collisions                        0
TX Excessive Collisions                   0
TX Collision frames                       0
TX PAUSEMAC Ctrl Frames                  0
TX MAC ctrl frames                       0
TX Frame deferred Xtns                    0
TX Frame excessive deferl                 0
TX Oversize Packets                       0
TX Jabbers                                0
TX FCS Error Counter                      0
TX Fragment Counter                       0
TX Byte Counter                           9050841
RX Packets 64 Octets                      0
RX Packets 65-127 Octets                  0
RX Packets 128-255 Octets                 29767
RX Packets 256-511 Octets                 225
RX Packets 512-1023 Octets                44
RX Packets 1024-1518 Octets               3
RX Packets 1519-2047 Octets               0
RX Packets 2048-4095 Octets               0
RX Packets 4096-9216 Octets               0
RX Octets                                 30039
RX Multicast Packets                      0
RX Broadcast Packets                      0
RX FCS Errors                             0
RX Align Errors                           0
RX Fragments                              0
RX Symbol errors                          0
RX Unsupported opcodes                    0
RX Out of Range Length                    0
RX False Carrier Errors                   0
RX Undersize Packets                      0
RX Oversize Packets                       0
RX Jabbers                                0
RX 1519-1522 Good Vlan frms              0
RX MTU Exceed Counter                    0
RX Control Frame Counter                  0
RX Pause Frame Counter                    0
RX Byte Counter                           7043738
```



## Statistics for port 28 connected to device CB0:

TX Packets 64 Octets	0
TX Packets 65-127 Octets	0
TX Packets 128-255 Octets	88500
TX Packets 256-511 Octets	864
TX Packets 512-1023 Octets	163
TX Packets 1024-1518 Octets	6
TX Packets 1519-2047 Octets	0
TX Packets 2048-4095 Octets	0
TX Packets 4096-9216 Octets	0
TX Packets 9217-16383 Octets	0
TX Octets	89533
TX Multicast Packets	0
TX Broadcast Packets	0
TX PAUSEMAC Ctrl Frames	0
TX Oversize Packets	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	21038170
RX Packets 64 Octets	0
RX Packets 65-127 Octets	1
RX Packets 128-255 Octets	120531
RX Packets 256-511 Octets	1947
RX Packets 512-1023 Octets	804
RX Packets 1024-1518 Octets	6
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Packets 9217-16383 Octets	0
RX Octets	123289
RX Multicast Packets	0
RX Broadcast Packets	1
RX FCS Errors	0
RX Fragments	0
RX MAC Control Packets	0
RX Out of Range Length	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	27110675

## Statistics for port 29 connected to device CB1:

TX Packets 64 Octets	0
TX Packets 65-127 Octets	1
TX Packets 128-255 Octets	0
TX Packets 256-511 Octets	0
TX Packets 512-1023 Octets	0
TX Packets 1024-1518 Octets	0
TX Packets 1519-2047 Octets	0
TX Packets 2048-4095 Octets	0
TX Packets 4096-9216 Octets	0
TX Packets 9217-16383 Octets	0
TX Octets	1
TX Multicast Packets	0
TX Broadcast Packets	1
TX PAUSEMAC Ctrl Frames	0
TX Oversize Packets	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	72



```

RX Packets 64 Octets      0
RX Packets 65-127 Octets 0
RX Packets 128-255 Octets 0
RX Packets 256-511 Octets 0
RX Packets 512-1023 Octets 0
RX Packets 1024-1518 Octets 0
RX Packets 1519-2047 Octets 0
RX Packets 2048-4095 Octets 0
RX Packets 4096-9216 Octets 0
RX Packets 9217-16383 Octets 0
RX Octets                  0
RX Multicast Packets       0
RX Broadcast Packets       0
RX FCS Errors              0
RX Fragments               0
RX MAC Control Packets     0
RX Out of Range Length     0
RX Undersize Packets       0
RX Oversize Packets        0
RX Jabbers                 0
RX Control Frame Counter   0
RX Pause Frame Counter     0
RX Byte Counter            0

```

Port statistics for FC2 switch  
Empty fpc slot number 2

Port statistics for FC3 switch  
Empty fpc slot number 3

Port statistics for FC4 switch  
Empty fpc slot number 4

Port statistics for FC5 switch  
Empty fpc slot number 5

Port statistics for FC6 switch  
Empty fpc slot number 6

Port statistics for FC7 switch  
Empty fpc slot number 7

**show chassis  
ethernet-switch fpc  
detail slot**

user@qfabric> show chassis ethernet-switch fpc detail 0  
re0:

```

-----
Port statistics for FC0 switch
Statistics for port 2 connected to device FWD-SWITCH-0:
TX Packets 64 Octets      0
TX Packets 65-127 Octets  1
TX Packets 128-255 Octets 121823
TX Packets 256-511 Octets 2200
TX Packets 512-1023 Octets 823
TX Packets 1024-1518 Octets 2
TX Packets 1519-2047 Octets 0
TX Packets 2048-4095 Octets 0
TX Packets 4096-9216 Octets 0
TX 1519-1522 Good Vlan frms 0
TX Octets                  124849
TX Multicast Packets       0
TX Broadcast Packets       1
TX Single Collision frames 0

```



```

TX Mult. Collision frames    0
TX Late Collisions          0
TX Excessive Collisions     0
TX Collision frames         0
TX PAUSEMAC Ctrl Frames     0
TX MAC ctrl frames         0
TX Frame deferred Xtns      0
TX Frame excessive deferl   0
TX Oversize Packets         0
TX Jabbers                  0
TX FCS Error Counter        0
TX Fragment Counter         0
TX Byte Counter             27414524
RX Packets 64 Octets        0
RX Packets 65-127 Octets    0
RX Packets 128-255 Octets   85998
RX Packets 256-511 Octets   557
RX Packets 512-1023 Octets  86
RX Packets 1024-1518 Octets 1
RX Packets 1519-2047 Octets 0
RX Packets 2048-4095 Octets 0
RX Packets 4096-9216 Octets 0
RX Octets                   86642
RX Multicast Packets        0
RX Broadcast Packets        0
RX FCS Errors               0
RX Align Errors             0
RX Fragments                0
RX Symbol errors            0
RX Unsupported opcodes      0
RX Out of Range Length      0
RX False Carrier Errors     0
RX Undersize Packets        0
RX Oversize Packets         0
RX Jabbers                  0
RX 1519-1522 Good Vlan frms 0
RX MTU Exceed Counter       0
RX Control Frame Counter    0
RX Pause Frame Counter      0
RX Byte Counter             20398564
Statistics for port 4 connected to device FWD-SWITCH-1:
TX Packets 64 Octets        0
TX Packets 65-127 Octets    1
TX Packets 128-255 Octets   80443
TX Packets 256-511 Octets   1347
TX Packets 512-1023 Octets  532
TX Packets 1024-1518 Octets  3
TX Packets 1519-2047 Octets  0
TX Packets 2048-4095 Octets  0
TX Packets 4096-9216 Octets  0
TX 1519-1522 Good Vlan frms 0
TX Octets                   82326
TX Multicast Packets        0
TX Broadcast Packets        1
TX Single Collision frames  0
TX Mult. Collision frames   0
TX Late Collisions          0
TX Excessive Collisions     0
TX Collision frames         0
TX PAUSEMAC Ctrl Frames     0
TX MAC ctrl frames         0

```



TX Frame deferred Xms	0
TX Frame excessive deferl	0
TX Oversize Packets	0
TX Jabbers	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	18161734
RX Packets 64 Octets	0
RX Packets 65-127 Octets	0
RX Packets 128-255 Octets	58460
RX Packets 256-511 Octets	523
RX Packets 512-1023 Octets	96
RX Packets 1024-1518 Octets	2
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Octets	59081
RX Multicast Packets	0
RX Broadcast Packets	0
RX FCS Errors	0
RX Align Errors	0
RX Fragments	0
RX Symbol errors	0
RX Unsupported opcodes	0
RX Out of Range Length	0
RX False Carrier Errors	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX 1519-1522 Good Vlan frms	0
RX MTU Exceed Counter	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	13894171

Statistics for port 28 connected to device CB0:

TX Packets 64 Octets	0
TX Packets 65-127 Octets	0
TX Packets 128-255 Octets	144458
TX Packets 256-511 Octets	1080
TX Packets 512-1023 Octets	182
TX Packets 1024-1518 Octets	3
TX Packets 1519-2047 Octets	0
TX Packets 2048-4095 Octets	0
TX Packets 4096-9216 Octets	0
TX Packets 9217-16383 Octets	0
TX Octets	145723
TX Multicast Packets	0
TX Broadcast Packets	0
TX PAUSEMAC Ctrl Frames	0
TX Oversize Packets	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	34292735
RX Packets 64 Octets	0
RX Packets 65-127 Octets	1
RX Packets 128-255 Octets	202266
RX Packets 256-511 Octets	3547
RX Packets 512-1023 Octets	1355
RX Packets 1024-1518 Octets	5
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0



```

RX Packets 4096-9216 Octets  0
RX Packets 9217-16383 Octets 0
RX Octets                    207174
RX Multicast Packets         0
RX Broadcast Packets         1
RX FCS Errors                0
RX Fragments                 0
RX MAC Control Packets       0
RX Out of Range Length       0
RX Undersize Packets         0
RX Oversize Packets          0
RX Jabbers                   0
RX Control Frame Counter     0
RX Pause Frame Counter       0
RX Byte Counter              45576186
Statistics for port 29 connected to device CB1:
TX Packets 64 Octets         0
TX Packets 65-127 Octets     1
TX Packets 128-255 Octets    0
TX Packets 256-511 Octets    0
TX Packets 512-1023 Octets   0
TX Packets 1024-1518 Octets  0
TX Packets 1519-2047 Octets  0
TX Packets 2048-4095 Octets  0
TX Packets 4096-9216 Octets  0
TX Packets 9217-16383 Octets 0
TX Octets                    1
TX Multicast Packets         0
TX Broadcast Packets         1
TX PAUSEMAC Ctrl Frames     0
TX Oversize Packets          0
TX FCS Error Counter         0
TX Fragment Counter          0
TX Byte Counter              72
RX Packets 64 Octets         0
RX Packets 65-127 Octets     0
RX Packets 128-255 Octets    0
RX Packets 256-511 Octets    0
RX Packets 512-1023 Octets   0
RX Packets 1024-1518 Octets  0
RX Packets 1519-2047 Octets  0
RX Packets 2048-4095 Octets  0
RX Packets 4096-9216 Octets  0
RX Packets 9217-16383 Octets 0
RX Octets                    0
RX Multicast Packets         0
RX Broadcast Packets         0
RX FCS Errors                0
RX Fragments                 0
RX MAC Control Packets       0
RX Out of Range Length       0
RX Undersize Packets         0
RX Oversize Packets          0
RX Jabbers                   0
RX Control Frame Counter     0
RX Pause Frame Counter       0
RX Byte Counter              0
Port statistics for FC1 switch
Statistics for port 2 connected to device FWD-SWITCH-0:
TX Packets 64 Octets         0

```



```
TX Packets 65-127 Octets      1
TX Packets 128-255 Octets    80629
TX Packets 256-511 Octets    1279
TX Packets 512-1023 Octets   514
TX Packets 1024-1518 Octets   3
TX Packets 1519-2047 Octets   0
TX Packets 2048-4095 Octets   0
TX Packets 4096-9216 Octets   0
TX 1519-1522 Good Vlan frms  0
TX Octets                     82426
TX Multicast Packets          0
TX Broadcast Packets          1
TX Single Collision frames    0
TX Mult. Collision frames     0
TX Late Collisions            0
TX Excessive Collisions       0
TX Collision frames           0
TX PAUSEMAC Ctrl Frames       0
TX MAC ctrl frames            0
TX Frame deferred Xmsns       0
TX Frame excessive deferl     0
TX Oversize Packets           0
TX Jabbers                    0
TX FCS Error Counter          0
TX Fragment Counter           0
TX Byte Counter               18074790
RX Packets 64 Octets          0
RX Packets 65-127 Octets      0
RX Packets 128-255 Octets     58785
RX Packets 256-511 Octets     640
RX Packets 512-1023 Octets    119
RX Packets 1024-1518 Octets    3
RX Packets 1519-2047 Octets    0
RX Packets 2048-4095 Octets    0
RX Packets 4096-9216 Octets    0
RX Octets                     59547
RX Multicast Packets          0
RX Broadcast Packets          0
RX FCS Errors                 0
RX Align Errors               0
RX Fragments                  0
RX Symbol errors              0
RX Unsupported opcodes        0
RX Out of Range Length        0
RX False Carrier Errors        0
RX Undersize Packets          0
RX Oversize Packets           0
RX Jabbers                    0
RX 1519-1522 Good Vlan frms   0
RX MTU Exceed Counter         0
RX Control Frame Counter       0
RX Pause Frame Counter         0
RX Byte Counter               14006842
Statistics for port 4 connected to device FWD-SWITCH-1:
TX Packets 64 Octets          0
TX Packets 65-127 Octets      1
TX Packets 128-255 Octets     40004
TX Packets 256-511 Octets     668
TX Packets 512-1023 Octets    290
TX Packets 1024-1518 Octets    3
TX Packets 1519-2047 Octets    0
```



```

TX Packets 2048-4095 Octets 0
TX Packets 4096-9216 Octets 0
TX 1519-1522 Good Vlan frms 0
TX Octets 40966
TX Multicast Packets 0
TX Broadcast Packets 1
TX Single Collision frames 0
TX Mult. Collision frames 0
TX Late Collisions 0
TX Excessive Collisions 0
TX Collision frames 0
TX PAUSEMAC Ctrl Frames 0
TX MAC ctrl frames 0
TX Frame deferred Xmsns 0
TX Frame excessive deferl 0
TX Oversize Packets 0
TX Jabbers 0
TX FCS Error Counter 0
TX Fragment Counter 0
TX Byte Counter 9058102
RX Packets 64 Octets 0
RX Packets 65-127 Octets 0
RX Packets 128-255 Octets 29794
RX Packets 256-511 Octets 225
RX Packets 512-1023 Octets 44
RX Packets 1024-1518 Octets 3
RX Packets 1519-2047 Octets 0
RX Packets 2048-4095 Octets 0
RX Packets 4096-9216 Octets 0
RX Octets 30066
RX Multicast Packets 0
RX Broadcast Packets 0
RX FCS Errors 0
RX Align Errors 0
RX Fragments 0
RX Symbol errors 0
RX Unsupported opcodes 0
RX Out of Range Length 0
RX False Carrier Errors 0
RX Undersize Packets 0
RX Oversize Packets 0
RX Jabbers 0
RX 1519-1522 Good Vlan frms 0
RX MTU Exceed Counter 0
RX Control Frame Counter 0
RX Pause Frame Counter 0
RX Byte Counter 7050000
Statistics for port 28 connected to device CB0:
TX Packets 64 Octets 0
TX Packets 65-127 Octets 0
TX Packets 128-255 Octets 88579
TX Packets 256-511 Octets 865
TX Packets 512-1023 Octets 163
TX Packets 1024-1518 Octets 6
TX Packets 1519-2047 Octets 0
TX Packets 2048-4095 Octets 0
TX Packets 4096-9216 Octets 0
TX Packets 9217-16383 Octets 0
TX Octets 89613
TX Multicast Packets 0
TX Broadcast Packets 0

```



TX PAUSEMAC Ctrl Frames	0
TX Oversize Packets	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	21056842
RX Packets 64 Octets	0
RX Packets 65-127 Octets	1
RX Packets 128-255 Octets	120633
RX Packets 256-511 Octets	1947
RX Packets 512-1023 Octets	804
RX Packets 1024-1518 Octets	6
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Packets 9217-16383 Octets	0
RX Octets	123391
RX Multicast Packets	0
RX Broadcast Packets	1
RX FCS Errors	0
RX Fragments	0
RX MAC Control Packets	0
RX Out of Range Length	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	27132820

Statistics for port 29 connected to device CB1:

TX Packets 64 Octets	0
TX Packets 65-127 Octets	1
TX Packets 128-255 Octets	0
TX Packets 256-511 Octets	0
TX Packets 512-1023 Octets	0
TX Packets 1024-1518 Octets	0
TX Packets 1519-2047 Octets	0
TX Packets 2048-4095 Octets	0
TX Packets 4096-9216 Octets	0
TX Packets 9217-16383 Octets	0
TX Octets	1
TX Multicast Packets	0
TX Broadcast Packets	1
TX PAUSEMAC Ctrl Frames	0
TX Oversize Packets	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	72
RX Packets 64 Octets	0
RX Packets 65-127 Octets	0
RX Packets 128-255 Octets	0
RX Packets 256-511 Octets	0
RX Packets 512-1023 Octets	0
RX Packets 1024-1518 Octets	0
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Packets 9217-16383 Octets	0
RX Octets	0
RX Multicast Packets	0
RX Broadcast Packets	0
RX FCS Errors	0



RX Fragments	0
RX MAC Control Packets	0
RX Out of Range Length	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	0

Port statistics for FC2 switch  
Empty fpc slot number 2

Port statistics for FC3 switch  
Empty fpc slot number 3

Port statistics for FC4 switch  
Empty fpc slot number 4

Port statistics for FC5 switch  
Empty fpc slot number 5

Port statistics for FC6 switch  
Empty fpc slot number 6

Port statistics for FC7 switch  
Empty fpc slot number 7

`show chassis`  
`ethernet-switch fpc`

```
user@qfabric> show chassis ethernet-switch fpc interconnect-device IC-WS001 port 2
Summary for switch on FC0
Link is good on GE port 2 connected to device: FWD-SWITCH-0
```



**interconnect-device  
port**

Speed is 1000Mb  
Duplex is full  
Autonegotiate is Disabled  
Flow Control TX is Disabled  
Flow Control RX is Disabled  
TX Octets 319466  
RX Octets 221869

Link is good on GE port 4 connected to device: FWD-SWITCH-1

Speed is 1000Mb  
Duplex is full  
Autonegotiate is Disabled  
Flow Control TX is Disabled  
Flow Control RX is Disabled  
TX Octets 210295  
RX Octets 151164

Link is good on XE port 28 connected to device: CB0

Speed is 10000Mb  
Duplex is full  
Autonegotiate is Enabled  
Flow Control TX is Disabled  
Flow Control RX is Disabled  
TX Octets 373033  
RX Octets 529760

Link is good on XE port 29 connected to device: CB1

Speed is 10000Mb  
Duplex is full  
Autonegotiate is Enabled  
Flow Control TX is Disabled  
Flow Control RX is Disabled  
TX Octets 1  
RX Octets 0

Summary for switch on FC1

Link is good on GE port 2 connected to device: FWD-SWITCH-0

Speed is 1000Mb  
Duplex is full  
Autonegotiate is Disabled  
Flow Control TX is Disabled  
Flow Control RX is Disabled  
TX Octets 210760  
RX Octets 152617

Link is good on GE port 4 connected to device: FWD-SWITCH-1

Speed is 1000Mb  
Duplex is full  
Autonegotiate is Disabled  
Flow Control TX is Disabled  
Flow Control RX is Disabled  
TX Octets 104587  
RX Octets 77315

Link is good on XE port 28 connected to device: CB0

Speed is 10000Mb  
Duplex is full  
Autonegotiate is Enabled  
Flow Control TX is Disabled  
Flow Control RX is Disabled  
TX Octets 229932



RX Octets 315346

Link is good on XE port 29 connected to device: CB1

Speed is 10000Mb

Duplex is full

Autonegotiate is Enabled

Flow Control TX is Disabled

Flow Control RX is Disabled

TX Octets 1

RX Octets 0

`show chassis`  
`ethernet-switch fpc`

user@qfabric> `show chassis ethernet-switch fpc interconnect-device IC-WS001 detail port 2`

Port statistics for FC0 switch

Statistics for port 2 connected to device FWD-SWITCH-0:



interconnect-device  
detail port

TX Packets 64 Octets	0
TX Packets 65-127 Octets	1
TX Packets 128-255 Octets	311974
TX Packets 256-511 Octets	5552
TX Packets 512-1023 Octets	2084
TX Packets 1024-1518 Octets	2
TX Packets 1519-2047 Octets	0
TX Packets 2048-4095 Octets	0
TX Packets 4096-9216 Octets	0
TX 1519-1522 Good Vlan frms	0
TX Octets	319613
TX Multicast Packets	0
TX Broadcast Packets	1
TX Single Collision frames	0
TX Mult. Collision frames	0
TX Late Collisions	0
TX Excessive Collisions	0
TX Collision frames	0
TX PAUSEMAC Ctrl Frames	0
TX MAC ctrl frames	0
TX Frame deferred Xms	0
TX Frame excessive deferl	0
TX Oversize Packets	0
TX Jabbers	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	70091196
RX Packets 64 Octets	0
RX Packets 65-127 Octets	0
RX Packets 128-255 Octets	220284
RX Packets 256-511 Octets	1486
RX Packets 512-1023 Octets	198
RX Packets 1024-1518 Octets	1
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Octets	221969
RX Multicast Packets	0
RX Broadcast Packets	0
RX FCS Errors	0
RX Align Errors	0
RX Fragments	0
RX Symbol errors	0
RX Unsupported opcodes	0
RX Out of Range Length	0
RX False Carrier Errors	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX 1519-1522 Good Vlan frms	0
RX MTU Exceed Counter	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	52192002
Statistics for port 4 connected to device FWD-SWITCH-1:	
TX Packets 64 Octets	0
TX Packets 65-127 Octets	1
TX Packets 128-255 Octets	205595
TX Packets 256-511 Octets	3426
TX Packets 512-1023 Octets	1366
TX Packets 1024-1518 Octets	3



```

TX Packets 1519-2047 Octets 0
TX Packets 2048-4095 Octets 0
TX Packets 4096-9216 Octets 0
TX 1519-1522 Good Vlan frms 0
TX Octets 210391
TX Multicast Packets 0
TX Broadcast Packets 1
TX Single Collision frames 0
TX Mult. Collision frames 0
TX Late Collisions 0
TX Excessive Collisions 0
TX Collision frames 0
TX PAUSEMAC Ctrl Frames 0
TX MAC ctrl frames 0
TX Frame deferred Xtns 0
TX Frame excessive deferl 0
TX Oversize Packets 0
TX Jabbers 0
TX FCS Error Counter 0
TX Fragment Counter 0
TX Byte Counter 46380018
RX Packets 64 Octets 0
RX Packets 65-127 Octets 0
RX Packets 128-255 Octets 149866
RX Packets 256-511 Octets 1194
RX Packets 512-1023 Octets 173
RX Packets 1024-1518 Octets 2
RX Packets 1519-2047 Octets 0
RX Packets 2048-4095 Octets 0
RX Packets 4096-9216 Octets 0
RX Octets 151235
RX Multicast Packets 0
RX Broadcast Packets 0
RX FCS Errors 0
RX Align Errors 0
RX Fragments 0
RX Symbol errors 0
RX Unsupported opcodes 0
RX Out of Range Length 0
RX False Carrier Errors 0
RX Undersize Packets 0
RX Oversize Packets 0
RX Jabbers 0
RX 1519-1522 Good Vlan frms 0
RX MTU Exceed Counter 0
RX Control Frame Counter 0
RX Pause Frame Counter 0
RX Byte Counter 35496911
Statistics for port 28 connected to device CB0:
TX Packets 64 Octets 0
TX Packets 65-127 Octets 0
TX Packets 128-255 Octets 370150
TX Packets 256-511 Octets 2680
TX Packets 512-1023 Octets 371
TX Packets 1024-1518 Octets 3
TX Packets 1519-2047 Octets 0
TX Packets 2048-4095 Octets 0
TX Packets 4096-9216 Octets 0
TX Packets 9217-16383 Octets 0
TX Octets 373204
TX Multicast Packets 0

```



TX Broadcast Packets	0
TX PAUSEMAC Ctrl Frames	0
TX Oversize Packets	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	87688913
RX Packets 64 Octets	0
RX Packets 65-127 Octets	1
RX Packets 128-255 Octets	517569
RX Packets 256-511 Octets	8978
RX Packets 512-1023 Octets	3450
RX Packets 1024-1518 Octets	5
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Packets 9217-16383 Octets	0
RX Octets	530003
RX Multicast Packets	0
RX Broadcast Packets	1
RX FCS Errors	0
RX Fragments	0
RX MAC Control Packets	0
RX Out of Range Length	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	116471142

Statistics for port 29 connected to device CB1:

TX Packets 64 Octets	0
TX Packets 65-127 Octets	1
TX Packets 128-255 Octets	0
TX Packets 256-511 Octets	0
TX Packets 512-1023 Octets	0
TX Packets 1024-1518 Octets	0
TX Packets 1519-2047 Octets	0
TX Packets 2048-4095 Octets	0
TX Packets 4096-9216 Octets	0
TX Packets 9217-16383 Octets	0
TX Octets	1
TX Multicast Packets	0
TX Broadcast Packets	1
TX PAUSEMAC Ctrl Frames	0
TX Oversize Packets	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	72
RX Packets 64 Octets	0
RX Packets 65-127 Octets	0
RX Packets 128-255 Octets	0
RX Packets 256-511 Octets	0
RX Packets 512-1023 Octets	0
RX Packets 1024-1518 Octets	0
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Packets 9217-16383 Octets	0
RX Octets	0
RX Multicast Packets	0
RX Broadcast Packets	0



RX FCS Errors	0
RX Fragments	0
RX MAC Control Packets	0
RX Out of Range Length	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	0



## show chassis ethernet-switch interconnect-device cb

<b>Syntax</b>	show chassis ethernet-switch interconnect-device <i>name</i> cb <detail> <port <i>number</i> > <slot <i>number</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	(QFX3000-G QFabric systems only) Display Ethernet switch information for the Control Board (CB) ports in an Interconnect device.
<b>Options</b>	<p><b>none</b>—Display Ethernet switch information about each connected port on each online CB in the Interconnect device.</p> <p><b>detail</b>—(Optional) Display detailed status information for all CBs or for the CB in the specified slot in the Interconnect device.</p> <p><b>port <i>number</i></b>—(Optional) Display Ethernet switch information about a specific port on a CB in the Interconnect device.</p> <p><b>slot <i>number</i></b>—(Optional) Display Ethernet switch information about a CB in a specific slot in the Interconnect device.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show chassis ethernet-switch interconnect-device cb on page 452</a> <a href="#">show chassis ethernet-switch interconnect-device cb detail on page 453</a> <a href="#">show chassis ethernet-switch interconnect-device cb detail slot port on page 459</a>
<b>Output Fields</b>	Table 37 on page 421 lists the output fields for the <b>show chassis ethernet-switch interconnect-device cb</b> command. Output fields are listed in the approximate order in which they appear.

**Table 38: show chassis ethernet-switch interconnect-device fpc Output Fields**

Field Name	Field Description
Link is good on port n connected to device	Information about the link between each port on the FPC's Ethernet switch and one of the following devices: <ul style="list-style-type: none"> <li>• FWD-SWITCH-0</li> <li>• FWD-SWITCH-1</li> <li>• CB0</li> <li>• CB1</li> </ul>
Speed is	Speed at which the Ethernet link is running: <b>10 Mb</b> When the device is <b>RE</b> or <b>Other RE</b> on the TX Matrix router, the speed is <b>1000 Mb</b> .
Duplex is	Duplex type of the Ethernet link: <b>full</b> or <b>half</b> .



Table 38: show chassis ethernet-switch interconnect-device fpc Output Fields (*continued*)

Field Name	Field Description
Autonegotiate is Enabled (or Disabled)	By default, built-in Fast Ethernet ports on a PIC autonegotiate whether to operate at 10 Mbps or 100 Mbps. All other interfaces automatically choose the correct speed based on the PIC type and whether the PIC is configured to operate in multiplexed mode (using the <b>no-concatenate</b> statement at the <b>[edit chassis]</b> hierarchy level, as described in the <i>Junos OS System Basics Configuration Guide</i> ).
Flow Control TX is Enabled (or Disabled)	Flow control in the transmit direction is enabled (or disabled). Flow control regulates the flow of packets from the switch to the remote side of the connection.
Flow Control RX is Enabled (or Disabled)	Flow control in the receive direction is enabled (or disabled). Flow control regulates the flow of packets from the remote side of the connection to the switch.
TX Octets	Number of octets sent.
TX Packets 64 Octets	Number of transmitted packets of size 64 octets.
TX Packets 65-127 Octets	Number of transmitted frames of size 65 through 127 octets.
TX Packets 128-255 Octets	Number of transmitted frames of size 128 through 255 octets.
TX Packets 256-511 Octets	Number of transmitted frames of size 256 through 511 octets.
TX Packets 512-1023 Octets	Number of transmitted frames of size 512 through 1023 octets.
TX Packets 1024-1518 Octets	Number of transmitted frames of size 1024 through 1518 octets.
TX Packets 1519-2047 Octets	Number of transmitted frames of size 1519 through 2047 octets.
TX Packets 2048-4095 Octets	Number of transmitted frames of size 2048 through 4095 octets.
TX Packets 4096-9216 Octets	Number of transmitted frames of size 4096 through 9216 octets.
TX Packets 9217-16383 Octets	Number of transmitted frames of size 9217 through 16383 octets.
TX Multicast packets	Number of multicast packets sent.
TX Broadcast packets	Number of broadcast packets sent.
TX Single Collision frames	Number of packets sent after one collision.



**Table 38: show chassis ethernet-switch interconnect-device fpc Output Fields (*continued*)**

Field Name	Field Description
TX Mult. Collision frames	Number of packets sent after multiple collisions.
TX Late Collision Frames	Number of packets aborted during sending because of collisions after 64 bytes.
TX Excessive collisions	Number of packets not sent because of too many collisions.
TX Collision frames	Number of collision packets sent.
TX PAUSEMAC Ctrl Frames	Number of Media Access Control (MAC) frames containing PAUSE commands sent.
TX MAC ctrl frames	Number of MAC control packets sent.
TX Frame deferred Xms	Number of frames deferred in x milliseconds.
TX Oversize Packets	Number of oversized packets sent.
TX Jabbers	Total number of frames sent that exceed the maximum byte count and contain CRC errors .
TX FCS Error Counter	Number of packets discarded because of frame check sequence errors.
TX Fragment Counter	Number of fragmented packets sent.
TX Byte Counter	Number of bytes sent.
RX Octets	Number of octets received.
RX Packets 64 Octets	Number of received packets of size 64 octets.
RX Packets 65-127 Octets	Number of received packets of size 65 through 127 octets.
RX Packets 128-255 Octets	Number of received packets of size 128 through 255 octets.
RX Packets 256-511 Octets	Number of received packets of size 256 through 511 octets.
RX Packets 512-1023 Octets	Number of received packets of size 512 through 1023 octets.
RX Packets 1024-1518 Octets	Number of received packets of size 65 through 127 octets.
RX Packets 1519-2047 Octets	Number of received packets of size 1519 through 2047 octets.



Table 38: show chassis ethernet-switch interconnect-device fpc Output Fields (*continued*)

Field Name	Field Description
RX Packets 2048-4095 Octets	Number of received packets of size 2048 through 4095 octets.
RX Packets 4096-9216 Octets	Number of received packets of size 4096 through 9216 octets.
RX Multicast Packets	Number of multicast packets received.
RX Broadcast Packets	Number of broadcast packets received.
RX FCS Errors	Number of packets discarded because of frame check sequence errors.
RX Align Errors	Number of incomplete octets received.
RX Fragments	Number of fragmented packets received.
RX Symbol errors	Number of symbols received that the router did not correctly decode.
RX Unsupported opcodes	Number of packets received with unsupported op codes.
RX Out of Range Length	Number of packets received with an out of range length.
RX False Carrier Errors	Number of packets received with false carrier errors.
RX Undersize Packets	Number of undersized packets received.
RX Oversize Packets	Number of oversized packets received.
RX Jabbers	Total number of frames received that exceed the maximum byte count and contain CRC errors .
RX 1519-1522 Good Vlan frms	
RX MTU Exceed Counter	Number of packets received that exceed the MTU.
RX Control Frame Counter	Number of control frames received.
RX Pause Frame Counter	Number of pause frames received.
RX Byte Counter	Number of bytes received.



## Sample Output

show chassis  
ethernet-switch  
interconnect-device cb

```
user@switch> show chassis ethernet-switch interconnect-device IC-WS001 cb
Displaying summary for switch 0
Link is down on XE port 1 connected to device: FPC7
  Flow Control TX is Disabled
  Flow Control RX is Disabled

Link is down on XE port 2 connected to device: FPC6
  Flow Control TX is Disabled
  Flow Control RX is Disabled

Link is down on XE port 3 connected to device: FPC5
  Flow Control TX is Disabled
  Flow Control RX is Disabled

Link is down on XE port 5 connected to device: FPC4
  Flow Control TX is Disabled
  Flow Control RX is Disabled

Link is down on XE port 7 connected to device: FPC3
  Flow Control TX is Disabled
  Flow Control RX is Disabled

Link is down on XE port 9 connected to device: FPC2
  Flow Control TX is Disabled
  Flow Control RX is Disabled

Link is good on XE port 10 connected to device: FPC1
  Speed is 10000Mb
  Duplex is full
  Autonegotiate is Enabled
  TX Octets                326358
  RX Octets                237947

Link is good on XE port 11 connected to device: FPC0
  Speed is 10000Mb
  Duplex is full
  Autonegotiate is Enabled
  TX Octets                548249
  RX Octets                386013

Link is down on XE port 20 connected to device: SFP3
  Flow Control TX is Disabled
  Flow Control RX is Disabled

Link is down on XE port 21 connected to device: SFP2
  Flow Control TX is Disabled
  Flow Control RX is Disabled

Link is good on XE port 22 connected to device: SFP1
  Speed is 1000Mb
  Duplex is full
  Autonegotiate is Enabled
  TX Octets                1
  RX Octets                11704758

Link is good on XE port 23 connected to device: SFP0
  Speed is 1000Mb
  Duplex is full
```



```
Autonegotiate is Enabled
TX Octets          1500022
RX Octets          11629453
```

```
Link is good on XE port 24 connected to device: VCCPD
Speed is 1000Mb
Duplex is full
Autonegotiate is Disabled
TX Octets          23332467
RX Octets          1500023
```

```
Link is good on GE port 25 connected to device: SFI
Speed is 1000Mb
Duplex is full
Autonegotiate is Disabled
TX Octets          643918
RX Octets          894548
```

```
show chassis
ethernet-switch
```

```
user@qfabric> show chassis ethernet-switch interconnect-device IC-WS001 cb detail
Port statistics for CB switch
```



**interconnect-device cb  
detail**

Link is down on XE port 1 connected to device: FPC7

Link is down on XE port 2 connected to device: FPC6

Link is down on XE port 3 connected to device: FPC5

Link is down on XE port 5 connected to device: FPC4

Link is down on XE port 7 connected to device: FPC3

Link is down on XE port 9 connected to device: FPC2

Statistics for port 10 connected to device FPC1:

TX Packets 64 Octets	0
TX Packets 65-127 Octets	1
TX Packets 128-255 Octets	319293
TX Packets 256-511 Octets	5043
TX Packets 512-1023 Octets	2072
TX Packets 1024-1518 Octets	6
TX Packets 1519-2047 Octets	0
TX Packets 2048-4095 Octets	0
TX Packets 4096-9216 Octets	0
TX Packets 9217-16383 Octets	0
TX Octets	326415
TX Multicast Packets	0
TX Broadcast Packets	1
TX PAUSEMAC Ctrl Frames	0
TX Oversize Packets	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	71659246
TX Packet OK Counter	326415
TX Pause Packet Counter	0
TX Unicast Counter	326414
RX Packets 64 Octets	0
RX Packets 65-127 Octets	0
RX Packets 128-255 Octets	235428
RX Packets 256-511 Octets	2134
RX Packets 512-1023 Octets	420
RX Packets 1024-1518 Octets	6
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Packets 9217-16383 Octets	0
RX Octets	237988
RX Multicast Packets	0
RX Broadcast Packets	0
RX FCS Errors	0
RX Fragments	0
RX MAC Control Packets	0
RX Out of Range Length	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	55821504
RX Unicast Frame Count	237988
RX Packet OK Count	237988

Statistics for port 11 connected to device FPC0:

TX Packets 64 Octets	0
TX Packets 65-127 Octets	1



```

TX Packets 128-255 Octets  535483
TX Packets 256-511 Octets  9289
TX Packets 512-1023 Octets 3564
TX Packets 1024-1518 Octets 5
TX Packets 1519-2047 Octets 0
TX Packets 2048-4095 Octets 0
TX Packets 4096-9216 Octets 0
TX Packets 9217-16383 Octets 0
TX Octets 548342
TX Multicast Packets 0
TX Broadcast Packets 1
TX PAUSEMAC Ctrl Frames 0
TX Oversize Packets 0
TX FCS Error Counter 0
TX Fragment Counter 0
TX Byte Counter 120498414
TX Packet OK Counter 548342
TX Pause Packet Counter 0
TX Unicast Counter 548341
RX Packets 64 Octets 0
RX Packets 65-127 Octets 0
RX Packets 128-255 Octets 382931
RX Packets 256-511 Octets 2762
RX Packets 512-1023 Octets 386
RX Packets 1024-1518 Octets 3
RX Packets 1519-2047 Octets 0
RX Packets 2048-4095 Octets 0
RX Packets 4096-9216 Octets 0
RX Packets 9217-16383 Octets 0
RX Octets 386082
RX Multicast Packets 0
RX Broadcast Packets 0
RX FCS Errors 0
RX Fragments 0
RX MAC Control Packets 0
RX Out of Range Length 0
RX Undersize Packets 0
RX Oversize Packets 0
RX Jabbers 0
RX Control Frame Counter 0
RX Pause Frame Counter 0
RX Byte Counter 90717369
RX Unicast Frame Count 386082
RX Packet OK Count 386082

```

Link is down on XE port 20 connected to device: SFP3

Link is down on XE port 21 connected to device: SFP2

Statistics for port 22 connected to device SFP1:

```

TX Packets 64 Octets 0
TX Packets 65-127 Octets 0
TX Packets 128-255 Octets 0
TX Packets 256-511 Octets 0
TX Packets 512-1023 Octets 0
TX Packets 1024-1518 Octets 1
TX Packets 1519-2047 Octets 0
TX Packets 2048-4095 Octets 0
TX Packets 4096-9216 Octets 0
TX 1519-1522 Good Vlan Frms 0
TX Octets 1
TX Multicast Packets 1

```



TX Broadcast Packets	0
TX Single Collision Frames	0
TX Mult. Collision Frames	0
TX Late Collisions	0
TX Excessive Collisions	0
TX Collision Frames	0
TX PAUSEMAC Ctrl Frames	0
TX MAC Ctrl Frames	0
TX Frame Deferred Xtns	0
TX Frame Excessive Deferl	0
TX Oversize Packets	0
TX Jabbers	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	1422
RX Packet OK Count	1
RX Packets 64 Octets	230013
RX Packets 65-127 Octets	174529
RX Packets 128-255 Octets	286735
RX Packets 256-511 Octets	343412
RX Packets 512-1023 Octets	172152
RX Packets 1024-1518 Octets	10500065
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Octets	11706906
RX Multicast Packets	11672320
RX Broadcast Packets	34460
RX FCS Errors	0
RX Align Errors	0
RX Fragments	0
RX Symbol Errors	0
RX Unsupported Opcodes	0
RX Out of Range Length	0
RX False Carrier Errors	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX 1519-1522 Good Vlan Frms	0
RX MTU Exceed Counter	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	2379464164
RX Packet OK Count	11706906

Statistics for port 23 connected to device SFP0:

TX Packets 64 Octets	3
TX Packets 65-127 Octets	484733
TX Packets 128-255 Octets	219112
TX Packets 256-511 Octets	129014
TX Packets 512-1023 Octets	503
TX Packets 1024-1518 Octets	666958
TX Packets 1519-2047 Octets	0
TX Packets 2048-4095 Octets	0
TX Packets 4096-9216 Octets	0
TX 1519-1522 Good Vlan Frms	0
TX Octets	1500323
TX Multicast Packets	794098
TX Broadcast Packets	1040
TX Single Collision Frames	0
TX Mult. Collision Frames	0
TX Late Collisions	0



TX Excessive Collisions	0
TX Collision Frames	0
TX PAUSEMAC Ctrl Frames	0
TX MAC Ctrl Frames	0
TX Frame Deferred Xms	0
TX Frame Excessive Deferl	0
TX Oversize Packets	0
TX Jabbers	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	1065466891
RX Packet OK Count	1500323
RX Packets 64 Octets	341563
RX Packets 65-127 Octets	430810
RX Packets 128-255 Octets	318279
RX Packets 256-511 Octets	347147
RX Packets 512-1023 Octets	184798
RX Packets 1024-1518 Octets	10008993
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Octets	11631590
RX Multicast Packets	10878484
RX Broadcast Packets	33420
RX FCS Errors	0
RX Align Errors	0
RX Fragments	0
RX Symbol Errors	0
RX Unsupported Opcodes	0
RX Out of Range Length	0
RX False Carrier Errors	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX 1519-1522 Good Vlan Frms	0
RX MTU Exceed Counter	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	1720484325
RX Packet OK Count	11631591

Statistics for port 24 connected to device VCCPD:

TX Packets 64 Octets	0
TX Packets 65-127 Octets	1176546
TX Packets 128-255 Octets	604988
TX Packets 256-511 Octets	690561
TX Packets 512-1023 Octets	356942
TX Packets 1024-1518 Octets	20507438
TX Packets 1519-2047 Octets	278
TX Packets 2048-4095 Octets	0
TX Packets 4096-9216 Octets	0
TX 1519-1522 Good Vlan Frms	278
TX Octets	23336753
TX Multicast Packets	22549383
TX Broadcast Packets	67862
TX Single Collision Frames	0
TX Mult. Collision Frames	0
TX Late Collisions	0
TX Excessive Collisions	0
TX Collision Frames	0
TX PAUSEMAC Ctrl Frames	0
TX MAC Ctrl Frames	0



TX Frame Deferred Xms	0
TX Frame Excessive Deferl	0
TX Oversize Packets	0
TX Jabbers	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	4191296788
RX Packet OK Count	23336753
RX Packets 64 Octets	3
RX Packets 65-127 Octets	484673
RX Packets 128-255 Octets	219074
RX Packets 256-511 Octets	129100
RX Packets 512-1023 Octets	516
RX Packets 1024-1518 Octets	666959
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Octets	1500325
RX Multicast Packets	794099
RX Broadcast Packets	1040
RX FCS Errors	0
RX Align Errors	0
RX Fragments	0
RX Symbol Errors	0
RX Unsupported Opcodes	0
RX Out of Range Length	0
RX False Carrier Errors	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX 1519-1522 Good Vlan Frms	0
RX MTU Exceed Counter	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	1071469739
RX Packet OK Count	1500325

Statistics for port 25 connected to device SFI:

TX Packets 64 Octets	12
TX Packets 65-127 Octets	1
TX Packets 128-255 Octets	618363
TX Packets 256-511 Octets	4896
TX Packets 512-1023 Octets	806
TX Packets 1024-1518 Octets	19950
TX Packets 1519-2047 Octets	0
TX Packets 2048-4095 Octets	0
TX Packets 4096-9216 Octets	0
TX 1519-1522 Good Vlan Frms	0
TX Octets	644028
TX Multicast Packets	4
TX Broadcast Packets	19954
TX Single Collision Frames	0
TX Mult. Collision Frames	0
TX Late Collisions	0
TX Excessive Collisions	0
TX Collision Frames	0
TX PAUSEMAC Ctrl Frames	0
TX MAC Ctrl Frames	0
TX Frame Deferred Xms	0
TX Frame Excessive Deferl	0
TX Oversize Packets	0
TX Jabbers	0



TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	167039705
RX Packet OK Count	644028
RX Packets 64 Octets	0
RX Packets 65-127 Octets	0
RX Packets 128-255 Octets	854776
RX Packets 256-511 Octets	14332
RX Packets 512-1023 Octets	5636
RX Packets 1024-1518 Octets	19954
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Octets	894698
RX Multicast Packets	0
RX Broadcast Packets	19943
RX FCS Errors	0
RX Align Errors	0
RX Fragments	0
RX Symbol Errors	0
RX Unsupported Opcodes	0
RX Out of Range Length	0
RX False Carrier Errors	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX 1519-1522 Good Vlan Frms	0
RX MTU Exceed Counter	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	212658920
RX Packet OK Count	894698

show chassis  
ethernet-switch

user@qfabric> show chassis ethernet-switch interconnect-device IC-WS001 cb slot 1 port 1  
re0:

-----



**interconnect-device cb  
detail slot port****Port statistics for CB switch**

Link is down on XE port 1 connected to device: FPC7

Link is down on XE port 2 connected to device: FPC6

Link is down on XE port 3 connected to device: FPC5

Link is down on XE port 5 connected to device: FPC4

Link is down on XE port 7 connected to device: FPC3

Link is down on XE port 9 connected to device: FPC2

Statistics for port 10 connected to device FPC1:

TX Packets 64 Octets	0
TX Packets 65-127 Octets	1
TX Packets 128-255 Octets	319366
TX Packets 256-511 Octets	5043
TX Packets 512-1023 Octets	2072
TX Packets 1024-1518 Octets	6
TX Packets 1519-2047 Octets	0
TX Packets 2048-4095 Octets	0
TX Packets 4096-9216 Octets	0
TX Packets 9217-16383 Octets	0
TX Octets	326488
TX Multicast Packets	0
TX Broadcast Packets	1
TX PAUSEMAC Ctrl Frames	0
TX Oversize Packets	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	71675330
TX Packet OK Counter	326488
TX Pause Packet Counter	0
TX Unicast Counter	326487
RX Packets 64 Octets	0
RX Packets 65-127 Octets	0
RX Packets 128-255 Octets	235481
RX Packets 256-511 Octets	2134
RX Packets 512-1023 Octets	420
RX Packets 1024-1518 Octets	6
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Packets 9217-16383 Octets	0
RX Octets	238041
RX Multicast Packets	0
RX Broadcast Packets	0
RX FCS Errors	0
RX Fragments	0
RX MAC Control Packets	0
RX Out of Range Length	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	55834224
RX Unicast Frame Count	238041
RX Packet OK Count	238041

Statistics for port 11 connected to device FPC0:



```

TX Packets 64 Octets      0
TX Packets 65-127 Octets  1
TX Packets 128-255 Octets 535606
TX Packets 256-511 Octets 9289
TX Packets 512-1023 Octets 3564
TX Packets 1024-1518 Octets 5
TX Packets 1519-2047 Octets 0
TX Packets 2048-4095 Octets 0
TX Packets 4096-9216 Octets 0
TX Packets 9217-16383 Octets 0
TX Octets                  548465
TX Multicast Packets       0
TX Broadcast Packets       1
TX PAUSEMAC Ctrl Frames    0
TX Oversize Packets        0
TX FCS Error Counter       0
TX Fragment Counter        0
TX Byte Counter            120525524
TX Packet OK Counter       548465
TX Pause Packet Counter    0
TX Unicast Counter         548464
RX Packets 64 Octets      0
RX Packets 65-127 Octets  0
RX Packets 128-255 Octets 383018
RX Packets 256-511 Octets 2762
RX Packets 512-1023 Octets 386
RX Packets 1024-1518 Octets 3
RX Packets 1519-2047 Octets 0
RX Packets 2048-4095 Octets 0
RX Packets 4096-9216 Octets 0
RX Packets 9217-16383 Octets 0
RX Octets                  386169
RX Multicast Packets       0
RX Broadcast Packets       0
RX FCS Errors              0
RX Fragments               0
RX MAC Control Packets     0
RX Out of Range Length     0
RX Undersize Packets       0
RX Oversize Packets        0
RX Jabbers                 0
RX Control Frame Counter   0
RX Pause Frame Counter     0
RX Byte Counter            90738249
RX Unicast Frame Count     386169
RX Packet OK Count        386169

```

Link is down on XE port 20 connected to device: SFP3

Link is down on XE port 21 connected to device: SFP2

Statistics for port 22 connected to device SFP1:

```

TX Packets 64 Octets      0
TX Packets 65-127 Octets  0
TX Packets 128-255 Octets  0
TX Packets 256-511 Octets  0
TX Packets 512-1023 Octets 0
TX Packets 1024-1518 Octets 1
TX Packets 1519-2047 Octets 0
TX Packets 2048-4095 Octets 0
TX Packets 4096-9216 Octets 0
TX 1519-1522 Good Vlan Frms 0

```



TX Octets	1
TX Multicast Packets	1
TX Broadcast Packets	0
TX Single Collision Frames	0
TX Mult. Collision Frames	0
TX Late Collisions	0
TX Excessive Collisions	0
TX Collision Frames	0
TX PAUSEMAC Ctrl Frames	0
TX MAC Ctrl Frames	0
TX Frame Deferred Xms	0
TX Frame Excessive Deferl	0
TX Oversize Packets	0
TX Jabbers	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	1422
RX Packet OK Count	1
RX Packets 64 Octets	230071
RX Packets 65-127 Octets	174571
RX Packets 128-255 Octets	286812
RX Packets 256-511 Octets	343500
RX Packets 512-1023 Octets	172203
RX Packets 1024-1518 Octets	10502544
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Octets	11709701
RX Multicast Packets	11675110
RX Broadcast Packets	34465
RX FCS Errors	0
RX Align Errors	0
RX Fragments	0
RX Symbol Errors	0
RX Unsupported Opcodes	0
RX Out of Range Length	0
RX False Carrier Errors	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX 1519-1522 Good Vlan Frms	0
RX MTU Exceed Counter	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	2383079858
RX Packet OK Count	11709701

Statistics for port 23 connected to device SFP0:

TX Packets 64 Octets	3
TX Packets 65-127 Octets	485048
TX Packets 128-255 Octets	219200
TX Packets 256-511 Octets	129053
TX Packets 512-1023 Octets	503
TX Packets 1024-1518 Octets	667127
TX Packets 1519-2047 Octets	0
TX Packets 2048-4095 Octets	0
TX Packets 4096-9216 Octets	0
TX 1519-1522 Good Vlan Frms	0
TX Octets	1500934
TX Multicast Packets	794300
TX Broadcast Packets	1040
TX Single Collision Frames	0



```

TX Mult. Collision Frames 0
TX Late Collisions 0
TX Excessive Collisions 0
TX Collision Frames 0
TX PAUSEMAC Ctrl Frames 0
TX MAC Ctrl Frames 0
TX Frame Deferred Xtns 0
TX Frame Excessive Deferr 0
TX Oversize Packets 0
TX Jabbers 0
TX FCS Error Counter 0
TX Fragment Counter 0
TX Byte Counter 1065764997
RX Packet OK Count 1500934
RX Packets 64 Octets 341648
RX Packets 65-127 Octets 431183
RX Packets 128-255 Octets 318367
RX Packets 256-511 Octets 347225
RX Packets 512-1023 Octets 184849
RX Packets 1024-1518 Octets 10011311
RX Packets 1519-2047 Octets 0
RX Packets 2048-4095 Octets 0
RX Packets 4096-9216 Octets 0
RX Octets 11634583
RX Multicast Packets 10881071
RX Broadcast Packets 33425
RX FCS Errors 0
RX Align Errors 0
RX Fragments 0
RX Symbol Errors 0
RX Unsupported Opcodes 0
RX Out of Range Length 0
RX False Carrier Errors 0
RX Undersize Packets 0
RX Oversize Packets 0
RX Jabbers 0
RX 1519-1522 Good Vlan Frms 0
RX MTU Exceed Counter 0
RX Control Frame Counter 0
RX Pause Frame Counter 0
RX Byte Counter 1723893006
RX Packet OK Count 11634583
Statistics for port 24 connected to device VCCPD:
TX Packets 64 Octets 0
TX Packets 65-127 Octets 1177102
TX Packets 128-255 Octets 605153
TX Packets 256-511 Octets 690727
TX Packets 512-1023 Octets 357044
TX Packets 1024-1518 Octets 20512235
TX Packets 1519-2047 Octets 278
TX Packets 2048-4095 Octets 0
TX Packets 4096-9216 Octets 0
TX 1519-1522 Good Vlan Frms 278
TX Octets 23342539
TX Multicast Packets 22554760
TX Broadcast Packets 67872
TX Single Collision Frames 0
TX Mult. Collision Frames 0
TX Late Collisions 0
TX Excessive Collisions 0
TX Collision Frames 0

```



TX PAUSEMAC Ctrl Frames	0
TX MAC Ctrl Frames	0
TX Frame Deferred Xtns	0
TX Frame Excessive Deferr	0
TX Oversize Packets	0
TX Jabbers	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	4198344167
RX Packet OK Count	23342539
RX Packets 64 Octets	3
RX Packets 65-127 Octets	484985
RX Packets 128-255 Octets	219164
RX Packets 256-511 Octets	129139
RX Packets 512-1023 Octets	516
RX Packets 1024-1518 Octets	667128
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Octets	1500935
RX Multicast Packets	794301
RX Broadcast Packets	1040
RX FCS Errors	0
RX Align Errors	0
RX Fragments	0
RX Symbol Errors	0
RX Unsupported Opcodes	0
RX Out of Range Length	0
RX False Carrier Errors	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX 1519-1522 Good Vlan Frms	0
RX MTU Exceed Counter	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	1071770147
RX Packet OK Count	1500935

Statistics for port 25 connected to device SFI:

TX Packets 64 Octets	12
TX Packets 65-127 Octets	1
TX Packets 128-255 Octets	618503
TX Packets 256-511 Octets	4896
TX Packets 512-1023 Octets	806
TX Packets 1024-1518 Octets	19950
TX Packets 1519-2047 Octets	0
TX Packets 2048-4095 Octets	0
TX Packets 4096-9216 Octets	0
TX 1519-1522 Good Vlan Frms	0
TX Octets	644168
TX Multicast Packets	4
TX Broadcast Packets	19954
TX Single Collision Frames	0
TX Mult. Collision Frames	0
TX Late Collisions	0
TX Excessive Collisions	0
TX Collision Frames	0
TX PAUSEMAC Ctrl Frames	0
TX MAC Ctrl Frames	0
TX Frame Deferred Xtns	0
TX Frame Excessive Deferr	0



TX Oversize Packets	0
TX Jabbers	0
TX FCS Error Counter	0
TX Fragment Counter	0
TX Byte Counter	167073305
RX Packet OK Count	644168
RX Packets 64 Octets	0
RX Packets 65-127 Octets	0
RX Packets 128-255 Octets	854972
RX Packets 256-511 Octets	14332
RX Packets 512-1023 Octets	5636
RX Packets 1024-1518 Octets	19954
RX Packets 1519-2047 Octets	0
RX Packets 2048-4095 Octets	0
RX Packets 4096-9216 Octets	0
RX Octets	894894
RX Multicast Packets	0
RX Broadcast Packets	19943
RX FCS Errors	0
RX Align Errors	0
RX Fragments	0
RX Symbol Errors	0
RX Unsupported Opcodes	0
RX Out of Range Length	0
RX False Carrier Errors	0
RX Undersize Packets	0
RX Oversize Packets	0
RX Jabbers	0
RX 1519-1522 Good Vlan Frms	0
RX MTU Exceed Counter	0
RX Control Frame Counter	0
RX Pause Frame Counter	0
RX Byte Counter	212702114
RX Packet OK Count	894894



## show chassis environment

---

Syntax	show chassis environment
Syntax (T320, T640, T1600, and T4000 Routers)	show chassis environment <cb <i>cb-slot-number</i> > <fpc <i>fpc-slot-number</i> > <fpm> <pem <i>pem-slot-number</i> > <routing-engine <i>re-slot-number</i> > <scg <i>scg-slot-number</i> > <sib <i>sib-slot-number</i> >
Syntax (TX Matrix Routers)	show chassis environment <lcc <i>number</i>   scc>
Syntax (TX Matrix Plus Routers)	show chassis environment <lcc <i>number</i>   sfc <i>number</i> >
Syntax (MX Series Routers)	show chassis environment <all-members> <local> <member <i>member-id</i> >
Syntax (MX2020 3D Universal Edge Routers)	show chassis environment <adc <i>adc-slot-number</i> > <cb <i>cb-slot-number</i> > <fpc <i>fpc-slot-number</i> > <fpm> <monitored> <psm <i>psm-slot-number</i> > <routing-engine <i>re-slot-number</i> > <sfb <i>sfb-slot-number</i> >
Syntax (MX2010 3D Universal Edge Routers)	show chassis environment <adc <i>adc-slot-number</i> > <cb <i>cb-slot-number</i> > <fpc <i>fpc-slot-number</i> > <fpm> <monitored> <psm <i>psm-slot-number</i> > <routing-engine <i>re-slot-number</i> > <sfb <i>sfb-slot-number</i> >
Syntax (EX Series Switch)	show chassis environment <all-members> <cb <i>cb-slot-number</i> > <fpc <i>fpc-slot-number</i> > <local> <member <i>member-id</i> > <routing-engine <i>re-slot-number</i> >



Syntax (EX Series Switch)	<pre>show chassis environment &lt;all-members&gt; &lt;cb <i>cb-slot-number</i>&gt; &lt;fpc <i>fpc-slot-number</i>&gt; &lt;local&gt; &lt;member <i>member-id</i>&gt; &lt;power-supply-unit <i>psu-slot-number</i>&gt; &lt;routing-engine <i>slot-number</i>&gt;</pre>
Syntax (QFX Series)	<pre>show chassis environment &lt;cb <i>slot-number</i> &lt;interconnect-device <i>name</i>&gt;&gt; &lt;fpc <i>slot-number</i> &lt;interconnect-device <i>name</i>&gt;&gt; &lt;interconnect-device <i>name</i> &lt;slot-number&gt; &lt;node-device <i>name</i>&gt; &lt;pem <i>slot-number</i> (interconnect-device <i>name</i> <i>slot-number</i>)   (node-device <i>name</i>)&gt; &lt;routing-engine <i>name</i> &lt;interconnect-device <i>name</i> <i>slot-number</i>&gt;&gt;</pre>
Syntax (PTX Series Packet Transport Switches)	<pre>show chassis environment &lt;cb <i>cb-slot-number</i>&gt; &lt;ccg <i>ccg-slot-number</i>&gt; &lt;fpc <i>fpc-slot-number</i>&gt; &lt;fpm&gt; &lt;monitored&gt; &lt;pdu <i>pdu-slot-number</i>&gt; &lt;routing-engine <i>re-slot-number</i>&gt; &lt;sib <i>sib-slot-number</i>&gt;</pre>
Syntax (ACX Series Universal Access Routers)	<pre>show chassis environment &lt;cb <i>cb-slot-number</i>&gt; &lt;pem <i>pem-slot-number</i>&gt; &lt;routing-engine <i>re-slot-number</i>&gt;</pre>
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6.</p> <p>Command introduced in Junos OS Release 11.1 for QFX Series.</p> <p>Command introduced in Junos OS Release 12.1 for PTX Series Packet Transport Switches.</p> <p><b>monitored</b> option added in Junos OS Release 12.1 for PTX Series Packet Transport Switches.</p> <p>Command introduced in Junos OS Release 12.1 for T4000 Core Routers.</p> <p>Command introduced in Junos OS Release 12.2 for ACX Series Universal Access Routers.</p> <p>Command introduced in Junos OS Release 12.3 for MX2020 3D Universal Edge Routers.</p> <p>Command introduced in Junos OS Release 12.3 for MX2010 3D Universal Edge Routers.</p> <p><b>pem</b> option introduced in Junos OS Release 12.3 for ACX4000 Universal Access Routers.</p>
Description	<p>Display environmental information about the router or switch chassis, including the temperature and information about the fans, power supplies, and Routing Engine.</p> <p>In addition on ACX4000 routers, display temperature information about the different channels of a Modular Interface Card (MIC). The number of channels displayed depends on the type of MIC installed.</p>



- Options** **none**—Display environmental information about the router or switch chassis. On a TX Matrix router, display environmental information about the TX Matrix router and its attached T640 routers. On a TX Matrix Plus router, display environmental information about the TX Matrix Plus router and its attached T1600 routers.
- all-members**—(MX Series routers and EX Series switches only) (Optional) Display chassis environmental information for all the members of the Virtual Chassis configuration.
- adc *adc-slot-number***—(MX2020 and MX2010 routers only) (Optional) Display chassis environmental information for the adapter cards. For MX2020 routers, replace ***adc-slot-number*** with a value from 0 through 19. For MX2010 routers, replace ***adc-slot-number*** with a value from 0 through 9.
- cb *cb-slot-number***—(ACX Series Universal Access Routers, EX Series switches, M120, M320, and M40e routers, MX Series routers, MX2020 routers, MX2010 routers, PTX Series Packet Transport Switches, QFX Series, and T Series routers only) (Optional) Display chassis environmental information for the Control Board. On devices other than EX Series switches, replace ***cb-slot*** with 0 or 1. For the EX Series switches, see EX Series Switches Hardware and CLI Terminology Mapping for information on CB slot numbering.
- cb interconnect-device *name***—(QFabric systems only) (Optional) Display chassis environmental information for the Control Board on an Interconnect device.
- ccg *ccg-slot-number***—(PTX Series only) (Optional) Display chassis environmental information for the Centralized Clock Generator. Replace ***cb-slot*** with a value of 0 or 1.
- fpc *fpc-slot***—(EX Series switches, M120, M320, and M40e routers, MX Series routers, MX2010 routers, MX2020 routers, PTX Series Packet Transport Switches, QFX Series, QFX3500 switches, QFabric systems, and T Series routers) (Optional) Display chassis environmental information for a specified Flexible PIC Concentrator. For MX2010 routers, replace ***fpc-slot*** with a value from 0 through 9. For MX2020 routers, replace ***fpc-slot*** with a value from 0 through 19. For information about FPC numbering, see [show chassis environment fpc](#). On a QFabric system, display chassis environmental information for a specified Flexible PIC Concentrator on an Interconnect device. On an EX Series switch, display chassis environmental information for a specified Flexible PIC Concentrator; see EX Series Switches Hardware and CLI Terminology Mapping for information on FPC numbering.
- fpm**—(M120, M320, and M40e routers, MX2010 routers, MX2020 routers, PTX Series, Packet Transport Switches, and T Series routers only) (Optional) Display chassis environmental information for the craft interface (FPM).
- interconnect-device *name***—(QFabric systems only) (Optional) Display chassis environmental information for the Interconnect device.
- monitored**—(MX2020 routers and PTX Series Packet Transport Switches only) (Optional) Display chassis environmental information for monitored temperatures only. Temperatures that are not included in temperature alarm computations are not displayed.



**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display chassis environmental information for a specified T640 router (or line-card chassis) that is connected to the TX Matrix router. On a TX Matrix Plus router, display chassis environmental information for a specified T1600 router (or line-card chassis) that is connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.

**local**—(MX Series routers and EX Series switches) (Optional) Display chassis environmental information for the local Virtual Chassis member.

**member *member-id***—(MX Series routers and EX Series switches only) (Optional) Display chassis environmental information for the specified member of the Virtual Chassis configuration. On MX Series routers, replace ***member-id*** with a value of 0 or 1. For EX Series switches, see member for member ID values.

**node-device *name***—(QFabric systems only) (Optional) Display chassis environmental information for the Node device.

**pdu *pdu-slot-number***—(PTX Series only) (Optional) Display chassis environmental information for the specified power distribution unit.

**pem**—(QFX3500 switches and QFabric systems only) (Optional) Display chassis environmental information for the Power Entry Module on the specified Interconnect device or Node device.

**pem *pem-slot-number***—(ACX Series Universal Access Routers, M120, M320, and M40e routers, MX Series routers, QFX Series, and T Series routers only) (Optional) Display chassis environmental information for the Power Entry Module on the specified Power Entry Module. For information about the options, see [show chassis environment pem](#).

**psm *psm-slot-number***—(MX2020 and MX2010 routers only) (Optional) Display chassis environmental information for the power supply module. For MX2020 routers, replace ***psm-slot-number*** with a value from 0 through 17. For MX2010 routers, replace ***psm-slot-number*** with a value from 0 through 8.

**psu *psu-slot-number***—(EX Series switches only) (Optional) Display chassis environmental information for a specified power supply. See EX Series Switches Hardware and CLI Terminology Mapping for detailed information.

**routing-engine**—(QFX3500 switches and QFabric systems only) (Optional) Display chassis environmental information for the Routing Engine on the specified Interconnect device.

**routing-engine *re-slot-number***—(Optional) Display chassis environmental information for the specified Routing Engine. For information about the options, see [show chassis environment routing-engine](#).

**scg**—(T Series routers only) (Optional) Display chassis environmental information about the SONET Clock Generator.



**scc**—(TX Matrix routers only) (Optional) Display chassis environmental information about the TX Matrix router (or switch-card chassis).

**sfb *sfb-slot-number***—(MX2020 and MX2010 routers only) (Optional) Display chassis environmental information for the power supply module. Replace ***sfb-slot-number*** with a value from 0 through 7.

**sfc *number***—(TX Matrix Plus routers only) (Optional) Display chassis environmental information about the TX Matrix Plus router (or switch-fabric chassis). Replace ***number*** with 0.

**sib *sib-slot-number***—(M320 routers, PTX Series Packet Transport Switches, and T Series routers only) (Optional) Display chassis environmental information about the specified switch interface board. For information about the options, see `show chassis environment sib`.

**Required Privilege Level**

view

**Related Documentation**

- `show chassis environment adc`
- [show chassis environment cb on page 517](#)
- `show chassis environment ccg`
- `show chassis environment cip`
- [show chassis environment fpc on page 535](#)
- `show chassis environment fpm`
- `show chassis environment mcs`
- `show chassis environment monitored`
- `show chassis environment pcg`
- `show chassis environment pdu`
- [show chassis environment pem on page 563](#)
- `show chassis environment psm`
- `show chassis environment psu`
- [show chassis environment routing-engine on page 572](#)
- `show chassis environment scg`
- `show chassis environment sfb`
- `show chassis environment sib`

**List of Sample Output**

[show chassis environment \(J2300 Router\) on page 474](#)  
[show chassis environment \(J4300 or J6300 Router\) on page 474](#)  
[show chassis environment \(M5 Router\) on page 474](#)  
[show chassis environment \(M7i Router\) on page 474](#)  
[show chassis environment \(M10 Router\) on page 474](#)



[show chassis environment \(M10i Router\) on page 475](#)  
[show chassis environment \(M20 Router\) on page 475](#)  
[show chassis environment \(M40 Router\) on page 475](#)  
[show chassis environment \(M40e Router\) on page 476](#)  
[show chassis environment \(M120 Router\) on page 476](#)  
[show chassis environment \(M160 Router\) on page 477](#)  
[show chassis environment \(M320 Router\) on page 478](#)  
[show chassis environment \(MX240 Router\) on page 479](#)  
[show chassis environment \(MX240 Router with Enhanced MX SCB\) on page 479](#)  
[show chassis environment \(MX480 Router\) on page 480](#)  
[show chassis environment \(MX480 Router with Enhanced MX SCB\) on page 481](#)  
[show chassis environment \(MX960 Router\) on page 482](#)  
[show chassis environment \(MX960 Router with Enhanced MX SCB\) on page 483](#)  
[show chassis environment \(MX2020 Router\) on page 486](#)  
[show chassis environment \(MX2010 Router\) on page 496](#)  
[show chassis environment \(T320 Router\) on page 501](#)  
[show chassis environment \(T640 Router\) on page 502](#)  
[show chassis environment \(T4000 Router\) on page 502](#)  
[show chassis environment \(TX Matrix Router\) on page 504](#)  
[show chassis environment \(T1600 Router\) on page 506](#)  
[show chassis environment \(TX Matrix Plus Router\) on page 506](#)  
[show chassis environment \(EX4200 Standalone Switch\) on page 509](#)  
[show chassis environment \(EX8216 Switch\) on page 509](#)  
[show chassis environment \(QFX Series\) on page 509](#)  
[show chassis environment interconnect-device \(QFabric System\) on page 510](#)  
[show chassis environment node-device \(QFabric System\) on page 512](#)  
[show chassis environment pem node-device \(QFabric System\) on page 513](#)  
[show chassis environment \(PTX5000 Packet Transport Switch\) on page 513](#)  
[show chassis environment \(ACX2000 Universal Access Router\) on page 516](#)

**Output Fields** [Table 39 on page 472](#) lists the output fields for the **show chassis environment** command. Output fields are listed in the approximate order in which they appear.



Table 39: show chassis environment Output Fields

Field Name	Field Description
<b>Class</b>	<p>Information about the category or class of chassis component:</p> <ul style="list-style-type: none"> <li>• <b>Power:</b> Power information: <ul style="list-style-type: none"> <li>• (M5, M10, M20, and M40 routers and EX Series switches only) Power supply status: <b>OK</b>, <b>Testing</b>, (during initial power-on), <b>Failed</b>, or <b>Absent</b>.</li> <li>• (M7i, M10i, M40e, M120, M160, M320, and T Series routers and EX Series switches only) Power Entry Modules status: <b>OK</b>, <b>Testing</b>, (during initial power-on), <b>Check</b>, <b>Failed</b>, or <b>Absent</b>.</li> <li>• (PTX Series only) Power information is reported in PDU or PSM combinations. The status is: <b>OK</b>, <b>Testing</b>, (during initial power-on), <b>Check</b>, <b>Failed</b>, or <b>Absent</b>.</li> </ul> </li> <li>• <b>Temp:</b> Temperature of air flowing through the chassis in degrees Celsius (C) and Fahrenheit (F). On PTX Series Packet Transport Switches and MX2010 and MX2020 Routers, multiple cooling zones are supported. FRU temperatures in each zone are coordinated with the fan speed of fan trays in those zones.</li> <li>• <b>Pic:</b> On ACX4000 Routers, multiple temperature channels on a MIC. The status is: <b>OK</b> and the <b>Measurement</b> is in degrees Celsius (C) and Fahrenheit (F).</li> <li>• <b>Fan:</b> Fan status: <b>OK</b>, <b>Testing</b> (during initial power-on), <b>Failed</b>, or <b>Absent</b>. On PTX Series Packet Transport Switches and MX2010 and MX2020 Routers, multiple fan trays are supported. Fan status is reported in Fan Tray or Fan combinations. <b>Measurement</b> indicates actual fan RPM (PTX and MX2010 and MX2020 Routers only).</li> <li>• <b>Misc:</b> Information about other components of the chassis. <ul style="list-style-type: none"> <li>• On some routers, this field indicates the status of one or more additional components.</li> <li>• On the M40e, M160, and M320 router, <b>Misc</b> includes <b>CIP</b> (Connector Interface Panel). <b>OK</b> indicates that the CIP is present. <b>Absent</b> indicates that the CIP is not present.</li> <li>• On T Series routers, <b>Misc</b> includes <b>CIP</b> and <b>SPMB</b> (Switch Processor Mezzanine Board). <b>OK</b> indicates that the <b>CIP</b> or <b>SPMB</b> is present. <b>Absent</b> indicates that the <b>CIP</b> or <b>SPMB</b> is not present.</li> <li>• On PTX Series Packet Transport Switches, <b>Misc</b> includes the <b>SPMB</b> (Switch Processor Mezzanine Board). The SPMB is located on the control boards. <b>OK</b> indicates that the control board is present. <b>Absent</b> indicates that the control board is not present.</li> </ul> </li> </ul>
<b>Item</b>	(MX2010 and MX2020 Routers) Information about the chassis component: Routing Engines, Controls Boards (CBs), Switch Fabric Boards (SFBs), PICs, Flexible PIC Concentrators (FPCs), and Adapter Cards (ADCs).
<b>Status</b>	<p>(MX2010 and MX2020 Routers) Status of the specified chassis component. For example, if the Class is Fan, the fan status can be:</p> <ul style="list-style-type: none"> <li>• <b>OK:</b> The fans are operational.</li> <li>• <b>Testing:</b> The fans are being tested during initial power-on.</li> <li>• <b>Failed:</b> The fans have failed or the fans are not spinning.</li> <li>• <b>Absent:</b> The fan tray is not installed.</li> </ul> <p>If the Class is Power, the power supply status can be:</p> <ul style="list-style-type: none"> <li>• <b>OK:</b> The power component is operational.</li> <li>• <b>Testing:</b> The power component is being tested during initial power-on.</li> <li>• <b>Check:</b> There is insufficient power---that is, fewer than the minimum required feeds are connected.</li> <li>• <b>Failed:</b> The inputs leads have failed.</li> <li>• <b>Absent:</b> The power component is not installed.</li> </ul>



Table 39: show chassis environment Output Fields (*continued*)

Field Name	Field Description
<b>Measurement</b>	(MX2010 and MX2020 Routers) Dependant on the Class. For example, if the Class is Temp, indicates the temperature in degree Celsius and degrees Fahrenheit. If the Class is Fan, indicates actual fan RPM.



## Sample Output

show chassis  
environment (J2300  
Router)

```
user@host> show chassis environment
Class Item              Status      Measurement
Temp  Routing Engine        OK          40 degrees C / 104 degrees F
Fan   Fan                 OK
```

show chassis  
environment (J4300 or  
J6300 Router)

```
user@host> show chassis environment
Class Item              Status      Measurement
Temp  Routing Engine        OK          41 degrees C / 105 degrees F
Fan   Fan 0                OK
      Fan 1              OK
```

show chassis  
environment (M5  
Router)

```
user@host> show chassis environment
Class Item              Status      Measurement
Power  Power Supply A        OK
       Power Supply B    Absent
Temp  FPC 0                OK          30 degrees C / 86 degrees F
      FEB                OK          33 degrees C / 91 degrees F
      PS Intake           OK          27 degrees C / 80 degrees F
      PS Exhaust          OK          27 degrees C / 80 degrees F
      Routing Engine      OK          34 degrees C / 93 degrees F
Fans  Left Fan 1          OK          Spinning at normal speed
      Left Fan 2          OK          Spinning at normal speed
      Left Fan 3          OK          Spinning at normal speed
      Left Fan 4          OK          Spinning at normal speed
Misc  Craft Interface     OK
```

show chassis  
environment (M7i  
Router)

```
user@host> show chassis environment
Class Item              Status      Measurement
Power  Power Supply 0       OK
       Power Supply 1    Absent
Temp  Intake              OK          22 degrees C / 71 degrees F
      FPC 0              OK          23 degrees C / 73 degrees F
      Power Supplies     OK          23 degrees C / 73 degrees F
      CFEB Intake         OK          24 degrees C / 75 degrees F
      CFEB Exhaust       OK          29 degrees C / 84 degrees F
      Routing Engine      OK          26 degrees C / 78 degrees F
Fans  Fan 1              OK          Spinning at normal speed
      Fan 2              OK          Spinning at normal speed
      Fan 3              OK          Spinning at normal speed
      Fan 4              OK          Spinning at normal speed
```

show chassis  
environment (M10  
Router)

```
user@host> show chassis environment
Class Item              Status      Measurement
Power  Power Supply A        OK
       Power Supply B    Failed
Temp  FPC 0                OK          36 degrees C / 96 degrees F
      FPC 1              OK          35 degrees C / 95 degrees F
      FEB                OK          34 degrees C / 93 degrees F
      PS Intake           OK          31 degrees C / 87 degrees F
      PS Exhaust          OK          34 degrees C / 93 degrees F
      Routing Engine      OK          35 degrees C / 95 degrees F
Fans  Left Fan 1          OK          Spinning at normal speed
```



	Left Fan 2	OK	Spinning at normal speed
	Left Fan 3	OK	Spinning at normal speed
	Left Fan 4	OK	Spinning at normal speed
Misc	Craft Interface	OK	

#### show chassis environment (M10i Router)

```
user@host> show chassis environment
```

Class	Item	Status	Measurement
Power	Power Supply 0	OK	
	Power Supply 1	OK	
	Power Supply 2	Absent	
	Power Supply 3	Absent	
Temp	Intake	OK	26 degrees C / 78 degrees F
	FPC 0	OK	27 degrees C / 80 degrees F
	FPC 1	OK	28 degrees C / 82 degrees F
	Lower Power Supplies	OK	29 degrees C / 84 degrees F
	Upper Power Supplies	OK	28 degrees C / 82 degrees F
	CFEB Intake	OK	27 degrees C / 80 degrees F
	CFEB Exhaust	OK	36 degrees C / 96 degrees F
	Routing Engine 0	OK	31 degrees C / 87 degrees F
	Routing Engine 1	OK	27 degrees C / 80 degrees F
Fans	Fan Tray 0 Fan 1	OK	Spinning at normal speed
	Fan Tray 0 Fan 2	OK	Spinning at normal speed
	Fan Tray 0 Fan 3	OK	Spinning at normal speed
	Fan Tray 0 Fan 4	OK	Spinning at normal speed
	Fan Tray 0 Fan 5	OK	Spinning at normal speed
	Fan Tray 0 Fan 6	OK	Spinning at normal speed
	Fan Tray 0 Fan 7	OK	Spinning at normal speed
	Fan Tray 0 Fan 8	OK	Spinning at normal speed
	Fan Tray 1 Fan 1	Absent	
	Fan Tray 1 Fan 2	Absent	
	Fan Tray 1 Fan 3	Absent	
	Fan Tray 1 Fan 4	Absent	
	Fan Tray 1 Fan 5	Absent	
	Fan Tray 1 Fan 6	Absent	
	Fan Tray 1 Fan 7	Absent	
	Fan Tray 1 Fan 8	Absent	

#### show chassis environment (M20 Router)

```
user@host> show chassis environment
```

Class	Item	Status	Measurement
Power	Power Supply A	OK	
	Power Supply B	Absent	
Temp	FPC 0	OK	28 degrees C / 82 degrees F
	FPC 1	OK	27 degrees C / 80 degrees F
	Power Supply A	OK	22 degrees C / 71 degrees F
	Power Supply B	Absent	
	SSB 0	OK	30 degrees C / 86 degrees F
	Backplane	OK	22 degrees C / 71 degrees F
	Routing Engine 0	OK	26 degrees C / 78 degrees F
	Routing Engine 1	Testing	
Fans	Rear Fan	OK	Spinning at normal speed
	Front Upper Fan	OK	Spinning at normal speed
	Front Middle Fan	OK	Spinning at normal speed
	Front Bottom Fan	OK	Spinning at normal speed
Misc	Craft Interface	OK	

```
user@host> show chassis environment
```



**show chassis  
environment (M40  
Router)**

Class	Item	Status	Measurement
Power	Power Supply A	OK	
	Power Supply B	Absent	
Temp	FPC 3	OK	24 degrees C / 75 degrees F
	FPC 6	OK	26 degrees C / 78 degrees F
	SCB	OK	26 degrees C / 78 degrees F
	Backplane @ A1	OK	28 degrees C / 82 degrees F
	Backplane @ A2	OK	23 degrees C / 73 degrees F
	Routing Engine	OK	26 degrees C / 78 degrees F
Fans	Top Impeller	OK	Spinning at normal speed
	Bottom impeller	OK	Spinning at normal speed
	Rear Left Fan	OK	Spinning at normal speed
	Rear Center Fan	OK	Spinning at normal speed
	Rear Right Fan	OK	Spinning at normal speed
Misc	Craft Interface	OK	

**show chassis  
environment (M40e  
Router)**

```
user@host> show chassis environment
```

Class	Item	Status	Measurement
Power	PEM 0	OK	
	PEM 1	Absent	
Temp	PCG 0	OK	44 degrees C / 111 degrees F
	PCG 1	OK	47 degrees C / 116 degrees F
	Routing Engine 0	OK	40 degrees C / 104 degrees F
	Routing Engine 1	OK	37 degrees C / 98 degrees F
	MCS 0	OK	45 degrees C / 113 degrees F
	MCS 1	OK	42 degrees C / 107 degrees F
	SFM 0 SPP	OK	40 degrees C / 104 degrees F
	SFM 0 SPR	OK	44 degrees C / 111 degrees F
	SFM 1 SPP	OK	43 degrees C / 109 degrees F
	SFM 1 SPR	OK	45 degrees C / 113 degrees F
	FPC 0	OK	38 degrees C / 100 degrees F
	FPC 1	OK	40 degrees C / 104 degrees F
	FPC 2	OK	38 degrees C / 100 degrees F
	FPC 4	OK	34 degrees C / 93 degrees F
	FPC 5	OK	43 degrees C / 109 degrees F
	FPC 6	OK	41 degrees C / 105 degrees F
	FPC 7	OK	43 degrees C / 109 degrees F
	FPM CMB	OK	28 degrees C / 82 degrees F
	FPM Display	OK	28 degrees C / 82 degrees F
Fans	Rear Bottom Blower	OK	Spinning at normal speed
	Rear Top Blower	OK	Spinning at normal speed
	Front Top Blower	OK	Spinning at normal speed
	Fan Tray Rear Left	OK	Spinning at normal speed
	Fan Tray Rear Right	OK	Spinning at normal speed
	Fan Tray Front Left	OK	Spinning at normal speed
	Fan Tray Front Right	OK	Spinning at normal speed
Misc	CIP	OK	

**show chassis  
environment (M120  
Router)**

```
user@host> show chassis environment
```

Class	Item	Status	Measurement
Temp	PEM 0	OK	
	PEM 1	OK	
	Routing Engine 0	OK	43 degrees C / 109 degrees F
	Routing Engine 1	OK	44 degrees C / 111 degrees F
	CB 0 Intake	OK	33 degrees C / 91 degrees F
	CB 0 Exhaust A	OK	36 degrees C / 96 degrees F
	CB 0 Exhaust B	OK	35 degrees C / 95 degrees F
	CB 1 Intake	OK	34 degrees C / 93 degrees F



	CB 1 Exhaust A	OK	38 degrees C / 100 degrees F
	CB 1 Exhaust B	OK	35 degrees C / 95 degrees F
	FEB 3 Intake	OK	35 degrees C / 95 degrees F
	FEB 3 Exhaust A	OK	37 degrees C / 98 degrees F
	FEB 3 Exhaust B	OK	39 degrees C / 102 degrees F
	FEB 4 Intake	OK	33 degrees C / 91 degrees F
	FEB 4 Exhaust A	OK	39 degrees C / 102 degrees F
	FEB 4 Exhaust B	OK	36 degrees C / 96 degrees F
	FPC 2 Exhaust A	OK	32 degrees C / 89 degrees F
	FPC 2 Exhaust B	OK	31 degrees C / 87 degrees F
	FPC 3 Exhaust A	OK	32 degrees C / 89 degrees F
	FPC 3 Exhaust B	OK	33 degrees C / 91 degrees F
	FPC 4 Exhaust A	OK	32 degrees C / 89 degrees F
	FPC 4 Exhaust B	OK	30 degrees C / 86 degrees F
Fans	Front Top Tray Fan 1	OK	Spinning at normal speed
	Front Top Tray Fan 2	OK	Spinning at normal speed
	Front Top Tray Fan 3	OK	Spinning at normal speed
	Front Top Tray Fan 4	OK	Spinning at normal speed
	Front Top Tray Fan 5	OK	Spinning at normal speed
	Front Top Tray Fan 6	OK	Spinning at normal speed
	Front Top Tray Fan 7	OK	Spinning at normal speed
	Front Top Tray Fan 8	OK	Spinning at normal speed
	Front Bottom Tray Fan 1	OK	Spinning at normal speed
	Front Bottom Tray Fan 2	OK	Spinning at normal speed
	Front Bottom Tray Fan 3	OK	Spinning at normal speed
	Front Bottom Tray Fan 4	OK	Spinning at normal speed
	Front Bottom Tray Fan 5	OK	Spinning at normal speed
	Front Bottom Tray Fan 6	OK	Spinning at normal speed
	Front Bottom Tray Fan 7	OK	Spinning at normal speed
	Front Bottom Tray Fan 8	OK	Spinning at normal speed
	Rear Top Tray Fan 1	OK	Spinning at normal speed
	Rear Top Tray Fan 2	OK	Spinning at normal speed
	Rear Top Tray Fan 3	OK	Spinning at normal speed
	Rear Top Tray Fan 4	OK	Spinning at normal speed
	Rear Top Tray Fan 5	OK	Spinning at normal speed
	Rear Top Tray Fan 6	OK	Spinning at normal speed
	Rear Top Tray Fan 7	OK	Spinning at normal speed
	Rear Top Tray Fan 8	OK	Spinning at normal speed
	Rear Bottom Tray Fan 1	OK	Spinning at normal speed
	Rear Bottom Tray Fan 2	OK	Spinning at normal speed
	Rear Bottom Tray Fan 3	OK	Spinning at normal speed
	Rear Bottom Tray Fan 4	OK	Spinning at normal speed
	Rear Bottom Tray Fan 5	OK	Spinning at normal speed
	Rear Bottom Tray Fan 6	OK	Spinning at normal speed
	Rear Bottom Tray Fan 7	OK	Spinning at normal speed
	Rear Bottom Tray Fan 8	OK	Spinning at normal speed

### show chassis environment (M160 Router)

user@host> show chassis environment

Class	Item	Status	Measurement	Absent
Power	PEM 0	OK	PEM 1	Absent
Temp	PCG 0	OK	45 degrees C / 113 degrees F	
	PCG 1	Absent		
	Routing Engine 0	OK	35 degrees C / 95 degrees F	
	Routing Engine 1	Absent		
	MCS 0	OK	50 degrees C / 122 degrees F	
	SFM 0 SPP	OK	47 degrees C / 116 degrees F	
	SFM 0 SPR	OK	49 degrees C / 120 degrees F	
	SFM 1 SPP	OK	50 degrees C / 122 degrees F	
	SFM 1 SPR	OK	50 degrees C / 122 degrees F	
	SFM 2 SPP	OK	51 degrees C / 123 degrees F	
	SFM 2 SPR	OK	52 degrees C / 125 degrees F	



	SFM 3 SPP	OK	52 degrees C / 125 degrees F
	SFM 3 SPR	OK	48 degrees C / 118 degrees F
	FPC 0	OK	45 degrees C / 113 degrees F
	FPC 6	OK	43 degrees C / 109 degrees F
	FPM CMB	OK	31 degrees C / 87 degrees F
	FPM Display	OK	33 degrees C / 91 degrees F
Fans	Rear Bottom Blower	OK	Spinning at normal speed
	Rear Top Blower	OK	Spinning at normal speed
	Front Top Blower	OK	Spinning at normal speed
	Fan Tray Rear Left	OK	Spinning at normal speed
	Fan Tray Rear Right	OK	Spinning at normal speed
	Fan Tray Front Left	OK	Spinning at normal speed
	Fan Tray Front Right	OK	Spinning at normal speed
Misc	CIP	OK	

### show chassis environment (M320 Router)

```
user@host> show chassis environment
```

Class	Item	Status	Measurement
Temp	PEM 0	Absent	
	PEM 1	Absent	
	PEM 2	OK	
	PEM 3	OK	
	Routing Engine 0	OK	33 degrees C / 91 degrees F
	Routing Engine 1	OK	32 degrees C / 89 degrees F
	CB 0	OK	36 degrees C / 96 degrees F
	CB 1	OK	36 degrees C / 96 degrees F
	SIB 0	OK	38 degrees C / 100 degrees F
	SIB 1	OK	29 degrees C / 84 degrees F
	SIB 2	OK	38 degrees C / 100 degrees F
	SIB 3	OK	41 degrees C / 105 degrees F
	FPC 0 Intake	OK	28 degrees C / 82 degrees F
	FPC 0 Exhaust	OK	40 degrees C / 104 degrees F
	FPC 1 Intake	OK	29 degrees C / 84 degrees F
	FPC 1 Exhaust	OK	39 degrees C / 102 degrees F
	FPC 2 Intake	OK	28 degrees C / 82 degrees F
	FPC 2 Exhaust	OK	38 degrees C / 100 degrees F
	FPC 3 Intake	OK	28 degrees C / 82 degrees F
	FPC 3 Exhaust	OK	39 degrees C / 102 degrees F
	FPC 6 Intake	OK	27 degrees C / 80 degrees F
	FPC 6 Exhaust	OK	39 degrees C / 102 degrees F
	FPC 7 Intake	OK	27 degrees C / 80 degrees F
	FPC 7 Exhaust	OK	42 degrees C / 107 degrees F
	FPM GBUS	OK	30 degrees C / 86 degrees F
Fan	Top Left Front fan	OK	Spinning at normal speed
	Top Right Rear fan	OK	Spinning at normal speed
	Top Right Front fan	OK	Spinning at normal speed
	Top Left Rear fan	OK	Spinning at normal speed
	Bottom Left Front fan	OK	Spinning at normal speed
	Bottom Right Rear fan	OK	Spinning at normal speed
	Bottom Right Front fan	OK	Spinning at normal speed
	Bottom Left Rear fan	OK	Spinning at normal speed
	Rear Fan 1 (TOP)	OK	Spinning at normal speed
	Rear Fan 2	OK	Spinning at normal speed
	Rear Fan 3	OK	Spinning at normal speed
	Rear Fan 4	OK	Spinning at normal speed
	Rear Fan 5	OK	Spinning at normal speed
	Rear Fan 6	OK	Spinning at normal speed
	Rear Fan 7 (Bottom)	OK	Spinning at normal speed
Misc	CIP	OK	



# show chassis environment (MX240 Router)

```
user@host> show chassis environment
```

Class	Item	Status	Measurement
Temp	PEM 0	OK	40 degrees C / 104 degrees F
	PEM 1	OK	45 degrees C / 113 degrees F
	PEM 2	Absent	
	PEM 3	Absent	
	Routing Engine 0	OK	39 degrees C / 102 degrees F
	Routing Engine 1	OK	37 degrees C / 98 degrees F
	CB 0 Intake	OK	36 degrees C / 96 degrees F
	CB 0 Exhaust A	OK	34 degrees C / 93 degrees F
	CB 0 Exhaust B	OK	38 degrees C / 100 degrees F
	CB 0 ACBC	OK	37 degrees C / 98 degrees F
	CB 0 SF A	OK	49 degrees C / 120 degrees F
	CB 0 SF B	OK	41 degrees C / 105 degrees F
	CB 1 Intake	OK	37 degrees C / 98 degrees F
	CB 1 Exhaust A	OK	34 degrees C / 93 degrees F
	CB 1 Exhaust B	OK	39 degrees C / 102 degrees F
	CB 1 ACBC	OK	38 degrees C / 100 degrees F
	CB 1 SF A	OK	47 degrees C / 116 degrees F
	CB 1 SF B	OK	41 degrees C / 105 degrees F
	FPC 1 Intake	OK	33 degrees C / 91 degrees F
	FPC 1 Exhaust A	OK	38 degrees C / 100 degrees F
	FPC 1 Exhaust B	OK	53 degrees C / 127 degrees F
	FPC 1 I3 0 TSensor	OK	50 degrees C / 122 degrees F
	FPC 1 I3 0 Chip	OK	53 degrees C / 127 degrees F
	FPC 1 I3 1 TSensor	OK	49 degrees C / 120 degrees F
	FPC 1 I3 1 Chip	OK	52 degrees C / 125 degrees F
	FPC 1 I3 2 TSensor	OK	47 degrees C / 116 degrees F
	FPC 1 I3 2 Chip	OK	49 degrees C / 120 degrees F
	FPC 1 I3 3 TSensor	OK	44 degrees C / 111 degrees F
	FPC 1 I3 3 Chip	OK	46 degrees C / 114 degrees F
	FPC 1 IA 0 TSensor	OK	45 degrees C / 113 degrees F
	FPC 1 IA 0 Chip	OK	44 degrees C / 111 degrees F
	FPC 1 IA 1 TSensor	OK	44 degrees C / 111 degrees F
	FPC 1 IA 1 Chip	OK	48 degrees C / 118 degrees F
	FPC 2 Intake	OK	32 degrees C / 89 degrees F
	FPC 2 Exhaust A	OK	40 degrees C / 104 degrees F
	FPC 2 Exhaust B	OK	52 degrees C / 125 degrees F
	FPC 2 I3 0 TSensor	OK	52 degrees C / 125 degrees F
	FPC 2 I3 0 Chip	OK	56 degrees C / 132 degrees F
	FPC 2 I3 1 TSensor	OK	52 degrees C / 125 degrees F
	FPC 2 I3 1 Chip	OK	55 degrees C / 131 degrees F
	FPC 2 I3 2 TSensor	OK	49 degrees C / 120 degrees F
	FPC 2 I3 2 Chip	OK	52 degrees C / 125 degrees F
	FPC 2 I3 3 TSensor	OK	44 degrees C / 111 degrees F
	FPC 2 I3 3 Chip	OK	48 degrees C / 118 degrees F
	FPC 2 IA 0 TSensor	OK	50 degrees C / 122 degrees F
	FPC 2 IA 0 Chip	OK	48 degrees C / 118 degrees F
	FPC 2 IA 1 TSensor	OK	47 degrees C / 116 degrees F
	FPC 2 IA 1 Chip	OK	53 degrees C / 127 degrees F
Fans	Front Fan	OK	Spinning at normal speed
	Middle Fan	OK	Spinning at normal speed
	Rear Fan	OK	Spinning at normal speed

# show chassis environment (MX240 Router)

```
user@host> show chassis environment
```

Class	Item	Status	Measurement
Temp	PEM 0	OK	40 degrees C / 104 degrees F



Router with Enhanced  
MX SCB)

PEM 1	OK	45 degrees C / 113 degrees F
PEM 2	Absent	
PEM 3	Absent	
Routing Engine 0	OK	39 degrees C / 102 degrees F
Routing Engine 1	OK	37 degrees C / 98 degrees F
CB 0 Intake	OK	36 degrees C / 96 degrees F
CB 0 Exhaust A	OK	34 degrees C / 93 degrees F
CB 0 Exhaust B	OK	38 degrees C / 100 degrees F
CB 0 ACBC	OK	37 degrees C / 98 degrees F
CB 0 XF A	OK	49 degrees C / 120 degrees F
CB 0 XF B	OK	41 degrees C / 105 degrees F
CB 1 Intake	OK	37 degrees C / 98 degrees F
CB 1 Exhaust A	OK	34 degrees C / 93 degrees F
CB 1 Exhaust B	OK	39 degrees C / 102 degrees F
CB 1 ACBC	OK	38 degrees C / 100 degrees F
CB 1 XF A	OK	47 degrees C / 116 degrees F
CB 1 XF B	OK	41 degrees C / 105 degrees F
FPC 1 Intake	OK	33 degrees C / 91 degrees F
FPC 1 Exhaust A	OK	38 degrees C / 100 degrees F
FPC 1 Exhaust B	OK	53 degrees C / 127 degrees F
FPC 1 I3 0 TSensor	OK	50 degrees C / 122 degrees F
FPC 1 I3 0 Chip	OK	53 degrees C / 127 degrees F
FPC 1 I3 1 TSensor	OK	49 degrees C / 120 degrees F
FPC 1 I3 1 Chip	OK	52 degrees C / 125 degrees F
FPC 1 I3 2 TSensor	OK	47 degrees C / 116 degrees F
FPC 1 I3 2 Chip	OK	49 degrees C / 120 degrees F
FPC 1 I3 3 TSensor	OK	44 degrees C / 111 degrees F
FPC 1 I3 3 Chip	OK	46 degrees C / 114 degrees F
FPC 1 IA 0 TSensor	OK	45 degrees C / 113 degrees F
FPC 1 IA 0 Chip	OK	44 degrees C / 111 degrees F
FPC 1 IA 1 TSensor	OK	44 degrees C / 111 degrees F
FPC 1 IA 1 Chip	OK	48 degrees C / 118 degrees F
FPC 2 Intake	OK	32 degrees C / 89 degrees F
FPC 2 Exhaust A	OK	40 degrees C / 104 degrees F
FPC 2 Exhaust B	OK	52 degrees C / 125 degrees F
FPC 2 I3 0 TSensor	OK	52 degrees C / 125 degrees F
FPC 2 I3 0 Chip	OK	56 degrees C / 132 degrees F
FPC 2 I3 1 TSensor	OK	52 degrees C / 125 degrees F
FPC 2 I3 1 Chip	OK	55 degrees C / 131 degrees F
FPC 2 I3 2 TSensor	OK	49 degrees C / 120 degrees F
FPC 2 I3 2 Chip	OK	52 degrees C / 125 degrees F
FPC 2 I3 3 TSensor	OK	44 degrees C / 111 degrees F
FPC 2 I3 3 Chip	OK	48 degrees C / 118 degrees F
FPC 2 IA 0 TSensor	OK	50 degrees C / 122 degrees F
FPC 2 IA 0 Chip	OK	48 degrees C / 118 degrees F
FPC 2 IA 1 TSensor	OK	47 degrees C / 116 degrees F
FPC 2 IA 1 Chip	OK	53 degrees C / 127 degrees F
Fans		
Front Fan	OK	Spinning at normal speed
Middle Fan	OK	Spinning at normal speed
Rear Fan	OK	Spinning at normal speed

show chassis  
environment (MX480  
Router)

user@host&gt; show chassis environment

Class	Item	Status	Measurement
Temp	PEM 0	OK	35 degrees C / 95 degrees F
	PEM 1	OK	40 degrees C / 104 degrees F
	PEM 2	Absent	
	PEM 3	Absent	
	Routing Engine 0	OK	44 degrees C / 111 degrees F
	Routing Engine 1	OK	45 degrees C / 113 degrees F
	CB 0 Intake	OK	36 degrees C / 96 degrees F
	CB 0 Exhaust A	OK	38 degrees C / 100 degrees F



CB 0 Exhaust B	OK	39 degrees C / 102 degrees F
CB 0 ACBC	OK	37 degrees C / 98 degrees F
CB 0 SF A	OK	51 degrees C / 123 degrees F
CB 0 SF B	OK	44 degrees C / 111 degrees F
CB 1 Intake	OK	36 degrees C / 96 degrees F
CB 1 Exhaust A	OK	39 degrees C / 102 degrees F
CB 1 Exhaust B	OK	40 degrees C / 104 degrees F
CB 1 ACBC	OK	37 degrees C / 98 degrees F
CB 1 SF A	OK	50 degrees C / 122 degrees F
CB 1 SF B	OK	43 degrees C / 109 degrees F
FPC 0 Intake	OK	36 degrees C / 96 degrees F
FPC 0 Exhaust A	OK	39 degrees C / 102 degrees F
FPC 0 Exhaust B	OK	51 degrees C / 123 degrees F
FPC 0 I3 0 TSensor	OK	49 degrees C / 120 degrees F
FPC 0 I3 0 Chip	OK	56 degrees C / 132 degrees F
FPC 0 I3 1 TSensor	OK	47 degrees C / 116 degrees F
FPC 0 I3 1 Chip	OK	52 degrees C / 125 degrees F
FPC 0 I3 2 TSensor	OK	46 degrees C / 114 degrees F
FPC 0 I3 2 Chip	OK	48 degrees C / 118 degrees F
FPC 0 I3 3 TSensor	OK	42 degrees C / 107 degrees F
FPC 0 I3 3 Chip	OK	45 degrees C / 113 degrees F
FPC 0 IA 0 TSensor	OK	45 degrees C / 113 degrees F
FPC 0 IA 0 Chip	OK	45 degrees C / 113 degrees F
FPC 0 IA 1 TSensor	OK	44 degrees C / 111 degrees F
FPC 0 IA 1 Chip	OK	48 degrees C / 118 degrees F
FPC 1 Intake	OK	37 degrees C / 98 degrees F
FPC 1 Exhaust A	OK	41 degrees C / 105 degrees F
FPC 1 Exhaust B	OK	52 degrees C / 125 degrees F
FPC 1 I3 0 TSensor	OK	51 degrees C / 123 degrees F
FPC 1 I3 0 Chip	OK	57 degrees C / 134 degrees F
FPC 1 I3 1 TSensor	OK	48 degrees C / 118 degrees F
FPC 1 I3 1 Chip	OK	52 degrees C / 125 degrees F
FPC 1 I3 2 TSensor	OK	46 degrees C / 114 degrees F
FPC 1 I3 2 Chip	OK	50 degrees C / 122 degrees F
FPC 1 I3 3 TSensor	OK	42 degrees C / 107 degrees F
FPC 1 I3 3 Chip	OK	46 degrees C / 114 degrees F
FPC 1 IA 0 TSensor	OK	49 degrees C / 120 degrees F
FPC 1 IA 0 Chip	OK	48 degrees C / 118 degrees F
FPC 1 IA 1 TSensor	OK	46 degrees C / 114 degrees F
FPC 1 IA 1 Chip	OK	50 degrees C / 122 degrees F
Fans Top Rear Fan	OK	Spinning at normal speed
Bottom Rear Fan	OK	Spinning at normal speed
Top Middle Fan	OK	Spinning at normal speed
Bottom Middle Fan	OK	Spinning at normal speed
Top Front Fan	OK	Spinning at normal speed
Bottom Front Fan	OK	Spinning at normal speed

show chassis  
environment (MX480)

user@host> show chassis environment

Class	Item	Status	Measurement
Temp	PEM 0	OK	35 degrees C / 95 degrees F



Router with Enhanced  
MX SCB)

PEM 1	OK	40 degrees C / 104 degrees F
PEM 2	Absent	
PEM 3	Absent	
Routing Engine 0	OK	44 degrees C / 111 degrees F
Routing Engine 1	OK	45 degrees C / 113 degrees F
CB 0 Intake	OK	36 degrees C / 96 degrees F
CB 0 Exhaust A	OK	38 degrees C / 100 degrees F
CB 0 Exhaust B	OK	39 degrees C / 102 degrees F
CB 0 ACBC	OK	37 degrees C / 98 degrees F
CB 0 XF A	OK	51 degrees C / 123 degrees F
CB 0 XF B	OK	44 degrees C / 111 degrees F
CB 1 Intake	OK	36 degrees C / 96 degrees F
CB 1 Exhaust A	OK	39 degrees C / 102 degrees F
CB 1 Exhaust B	OK	40 degrees C / 104 degrees F
CB 1 ACBC	OK	37 degrees C / 98 degrees F
CB 1 XF A	OK	50 degrees C / 122 degrees F
CB 1 XF B	OK	43 degrees C / 109 degrees F
FPC 0 Intake	OK	36 degrees C / 96 degrees F
FPC 0 Exhaust A	OK	39 degrees C / 102 degrees F
FPC 0 Exhaust B	OK	51 degrees C / 123 degrees F
FPC 0 I3 0 TSensor	OK	49 degrees C / 120 degrees F
FPC 0 I3 0 Chip	OK	56 degrees C / 132 degrees F
FPC 0 I3 1 TSensor	OK	47 degrees C / 116 degrees F
FPC 0 I3 1 Chip	OK	52 degrees C / 125 degrees F
FPC 0 I3 2 TSensor	OK	46 degrees C / 114 degrees F
FPC 0 I3 2 Chip	OK	48 degrees C / 118 degrees F
FPC 0 I3 3 TSensor	OK	42 degrees C / 107 degrees F
FPC 0 I3 3 Chip	OK	45 degrees C / 113 degrees F
FPC 0 IA 0 TSensor	OK	45 degrees C / 113 degrees F
FPC 0 IA 0 Chip	OK	45 degrees C / 113 degrees F
FPC 0 IA 1 TSensor	OK	44 degrees C / 111 degrees F
FPC 0 IA 1 Chip	OK	48 degrees C / 118 degrees F
FPC 1 Intake	OK	37 degrees C / 98 degrees F
FPC 1 Exhaust A	OK	41 degrees C / 105 degrees F
FPC 1 Exhaust B	OK	52 degrees C / 125 degrees F
FPC 1 I3 0 TSensor	OK	51 degrees C / 123 degrees F
FPC 1 I3 0 Chip	OK	57 degrees C / 134 degrees F
FPC 1 I3 1 TSensor	OK	48 degrees C / 118 degrees F
FPC 1 I3 1 Chip	OK	52 degrees C / 125 degrees F
FPC 1 I3 2 TSensor	OK	46 degrees C / 114 degrees F
FPC 1 I3 2 Chip	OK	50 degrees C / 122 degrees F
FPC 1 I3 3 TSensor	OK	42 degrees C / 107 degrees F
FPC 1 I3 3 Chip	OK	46 degrees C / 114 degrees F
FPC 1 IA 0 TSensor	OK	49 degrees C / 120 degrees F
FPC 1 IA 0 Chip	OK	48 degrees C / 118 degrees F
FPC 1 IA 1 TSensor	OK	46 degrees C / 114 degrees F
FPC 1 IA 1 Chip	OK	50 degrees C / 122 degrees F
Fans		
Top Rear Fan	OK	Spinning at normal speed
Bottom Rear Fan	OK	Spinning at normal speed
Top Middle Fan	OK	Spinning at normal speed
Bottom Middle Fan	OK	Spinning at normal speed
Top Front Fan	OK	Spinning at normal speed
Bottom Front Fan	OK	Spinning at normal speed

show chassis  
environment (MX960  
Router)

user@host> show chassis environment		
Class Item	Status	Measurement
Temp PEM 0	Absent	
PEM 1	Absent	
PEM 2	Check	
PEM 3	OK	35 degrees C / 95 degrees F
Routing Engine 0	OK	37 degrees C / 98 degrees F



	Routing Engine 1	Absent	
	CB 0 Intake	OK	24 degrees C / 75 degrees F
	CB 0 Exhaust A	OK	30 degrees C / 86 degrees F
	CB 0 Exhaust B	OK	27 degrees C / 80 degrees F
	CB 1 Intake	Absent	
	CB 1 Exhaust A	Absent	
	CB 1 Exhaust B	Absent	
	CB 1 ACBC	Absent	
	CB 1 SF A	Absent	
	CB 1 SF B	Absent	
	CB 2 Intake	Absent	
	CB 2 Exhaust A	Absent	
	CB 2 Exhaust B	Absent	
	CB 2 ACBC	Absent	
	CB 2 SF A	Absent	
	CB 2 SF B	Absent	
	FPC 4 Intake	OK	24 degrees C / 75 degrees F
	FPC 4 Exhaust A	OK	36 degrees C / 96 degrees F
	FPC 4 Exhaust B	OK	38 degrees C / 100 degrees F
	FPC 7 Intake	OK	24 degrees C / 75 degrees F
	FPC 7 Exhaust A	OK	36 degrees C / 96 degrees F
	FPC 7 Exhaust B	OK	42 degrees C / 107 degrees F
Fans	Top Fan Tray Temp	Failed	
	Top Tray Fan 1	OK	Spinning at normal speed
	Top Tray Fan 2	OK	Spinning at normal speed
	Top Tray Fan 3	OK	Spinning at normal speed
	Top Tray Fan 4	OK	Spinning at normal speed
	Top Tray Fan 5	OK	Spinning at normal speed
	Top Tray Fan 6	OK	Spinning at normal speed
	Bottom Fan Tray Temp	Failed	
	Bottom Tray Fan 1	OK	Spinning at normal speed
	Bottom Tray Fan 2	OK	Spinning at normal speed
	Bottom Tray Fan 3	OK	Spinning at normal speed
	Bottom Tray Fan 4	OK	Spinning at normal speed
	Bottom Tray Fan 5	OK	Spinning at normal speed
	Bottom Tray Fan 6	OK	Spinning at normal speed

show chassis  
environment (MX960)

user@host> show chassis environment

Class	Item	Status	Measurement
Temp	PEM 0	Absent	



Router with Enhanced  
MX SCB)

PEM 1	OK	50 degrees C / 122 degrees F
PEM 2	OK	50 degrees C / 122 degrees F
PEM 3	OK	50 degrees C / 122 degrees F
Routing Engine 0	OK	42 degrees C / 107 degrees F
Routing Engine 0 CPU	OK	51 degrees C / 123 degrees F
Routing Engine 1	OK	39 degrees C / 102 degrees F
Routing Engine 1 CPU	OK	44 degrees C / 111 degrees F
CB 0 Intake	OK	35 degrees C / 95 degrees F
CB 0 Exhaust A	OK	36 degrees C / 96 degrees F
CB 0 Exhaust B	OK	43 degrees C / 109 degrees F
CB 0 ACBC	OK	38 degrees C / 100 degrees F
CB 0 XF A	OK	53 degrees C / 127 degrees F
CB 0 XF B	OK	47 degrees C / 116 degrees F
CB 1 Intake	OK	35 degrees C / 95 degrees F
CB 1 Exhaust A	OK	35 degrees C / 95 degrees F
CB 1 Exhaust B	OK	41 degrees C / 105 degrees F
CB 1 ACBC	OK	38 degrees C / 100 degrees F
CB 1 XF A	OK	52 degrees C / 125 degrees F
CB 1 XF B	OK	47 degrees C / 116 degrees F
CB 2 Intake	OK	32 degrees C / 89 degrees F
CB 2 Exhaust A	OK	30 degrees C / 86 degrees F
CB 2 Exhaust B	OK	35 degrees C / 95 degrees F
CB 2 ACBC	OK	33 degrees C / 91 degrees F
CB 2 XF A	OK	51 degrees C / 123 degrees F
CB 2 XF B	OK	50 degrees C / 122 degrees F
FPC 0 Intake	OK	35 degrees C / 95 degrees F
FPC 0 Exhaust A	OK	39 degrees C / 102 degrees F
FPC 0 Exhaust B	OK	50 degrees C / 122 degrees F
FPC 0 I3 0 TSensor	OK	50 degrees C / 122 degrees F
FPC 0 I3 0 Chip	OK	56 degrees C / 132 degrees F
FPC 0 I3 1 TSensor	OK	47 degrees C / 116 degrees F
FPC 0 I3 1 Chip	OK	50 degrees C / 122 degrees F
FPC 0 I3 2 TSensor	OK	45 degrees C / 113 degrees F
FPC 0 I3 2 Chip	OK	48 degrees C / 118 degrees F
FPC 0 I3 3 TSensor	OK	41 degrees C / 105 degrees F
FPC 0 I3 3 Chip	OK	44 degrees C / 111 degrees F
FPC 0 IA 0 TSensor	OK	45 degrees C / 113 degrees F
FPC 0 IA 0 Chip	OK	45 degrees C / 113 degrees F
FPC 0 IA 1 TSensor	OK	44 degrees C / 111 degrees F
FPC 0 IA 1 Chip	OK	48 degrees C / 118 degrees F
FPC 1 Intake	OK	36 degrees C / 96 degrees F
FPC 1 Exhaust A	OK	47 degrees C / 116 degrees F
FPC 1 Exhaust B	OK	43 degrees C / 109 degrees F
FPC 1 LU 0 TCAM TSensor	OK	53 degrees C / 127 degrees F
FPC 1 LU 0 TCAM Chip	OK	57 degrees C / 134 degrees F
FPC 1 LU 0 TSensor	OK	53 degrees C / 127 degrees F
FPC 1 LU 0 Chip	OK	60 degrees C / 140 degrees F
FPC 1 MQ 0 TSensor	OK	53 degrees C / 127 degrees F
FPC 1 MQ 0 Chip	OK	56 degrees C / 132 degrees F
FPC 1 LU 1 TCAM TSensor	OK	51 degrees C / 123 degrees F
FPC 1 LU 1 TCAM Chip	OK	52 degrees C / 125 degrees F
FPC 1 LU 1 TSensor	OK	51 degrees C / 123 degrees F
FPC 1 LU 1 Chip	OK	53 degrees C / 127 degrees F
FPC 1 MQ 1 TSensor	OK	51 degrees C / 123 degrees F
FPC 1 MQ 1 Chip	OK	58 degrees C / 136 degrees F
FPC 2 Intake	OK	35 degrees C / 95 degrees F
FPC 2 Exhaust A	OK	39 degrees C / 102 degrees F
FPC 2 Exhaust B	OK	54 degrees C / 129 degrees F
FPC 2 I3 0 TSensor	OK	52 degrees C / 125 degrees F
FPC 2 I3 0 Chip	OK	59 degrees C / 138 degrees F
FPC 2 I3 1 TSensor	OK	48 degrees C / 118 degrees F



FPC 2 I3 1 Chip	OK	52 degrees C / 125 degrees F
FPC 2 I3 2 TSensor	OK	47 degrees C / 116 degrees F
FPC 2 I3 2 Chip	OK	49 degrees C / 120 degrees F
FPC 2 I3 3 TSensor	OK	41 degrees C / 105 degrees F
FPC 2 I3 3 Chip	OK	44 degrees C / 111 degrees F
FPC 2 IA 0 TSensor	OK	47 degrees C / 116 degrees F
FPC 2 IA 0 Chip	OK	46 degrees C / 114 degrees F
FPC 2 IA 1 TSensor	OK	45 degrees C / 113 degrees F
FPC 2 IA 1 Chip	OK	49 degrees C / 120 degrees F
FPC 3 Intake	OK	34 degrees C / 93 degrees F
FPC 3 Exhaust A	OK	34 degrees C / 93 degrees F
FPC 3 Exhaust B	OK	47 degrees C / 116 degrees F
FPC 3 I3 0 TSensor	OK	48 degrees C / 118 degrees F
FPC 3 I3 0 Chip	OK	52 degrees C / 125 degrees F
FPC 3 I3 1 TSensor	OK	46 degrees C / 114 degrees F
FPC 3 I3 1 Chip	OK	48 degrees C / 118 degrees F
FPC 3 IA 0 TSensor	OK	41 degrees C / 105 degrees F
FPC 3 IA 0 Chip	OK	40 degrees C / 104 degrees F
FPC 5 Intake	OK	42 degrees C / 107 degrees F
FPC 5 Exhaust A	OK	42 degrees C / 107 degrees F
FPC 5 Exhaust B	OK	53 degrees C / 127 degrees F
FPC 5 LU 0 TSensor	OK	53 degrees C / 127 degrees F
FPC 5 LU 0 Chip	OK	54 degrees C / 129 degrees F
FPC 5 LU 1 TSensor	OK	53 degrees C / 127 degrees F
FPC 5 LU 1 Chip	OK	61 degrees C / 141 degrees F
FPC 5 LU 2 TSensor	OK	53 degrees C / 127 degrees F
FPC 5 LU 2 Chip	OK	51 degrees C / 123 degrees F
FPC 5 LU 3 TSensor	OK	53 degrees C / 127 degrees F
FPC 5 LU 3 Chip	OK	53 degrees C / 127 degrees F
FPC 5 MQ 0 TSensor	OK	47 degrees C / 116 degrees F
FPC 5 MQ 0 Chip	OK	52 degrees C / 125 degrees F
FPC 5 MQ 1 TSensor	OK	47 degrees C / 116 degrees F
FPC 5 MQ 1 Chip	OK	52 degrees C / 125 degrees F
FPC 5 MQ 2 TSensor	OK	47 degrees C / 116 degrees F
FPC 5 MQ 2 Chip	OK	46 degrees C / 114 degrees F
FPC 5 MQ 3 TSensor	OK	47 degrees C / 116 degrees F
FPC 5 MQ 3 Chip	OK	45 degrees C / 113 degrees F
FPC 7 Intake	OK	36 degrees C / 96 degrees F
FPC 7 Exhaust A	OK	35 degrees C / 95 degrees F
FPC 7 Exhaust B	OK	33 degrees C / 91 degrees F
FPC 7 QX 0 TSensor	OK	42 degrees C / 107 degrees F
FPC 7 QX 0 Chip	OK	47 degrees C / 116 degrees F
FPC 7 LU 0 TCAM TSensor	OK	42 degrees C / 107 degrees F
FPC 7 LU 0 TCAM Chip	OK	44 degrees C / 111 degrees F
FPC 7 LU 0 TSensor	OK	42 degrees C / 107 degrees F
FPC 7 LU 0 Chip	OK	46 degrees C / 114 degrees F
FPC 7 MQ 0 TSensor	OK	42 degrees C / 107 degrees F
FPC 7 MQ 0 Chip	OK	45 degrees C / 113 degrees F
FPC 8 Intake	OK	33 degrees C / 91 degrees F
FPC 8 Exhaust A	OK	33 degrees C / 91 degrees F
FPC 8 Exhaust B	OK	36 degrees C / 96 degrees F
FPC 8 I3 0 TSensor	OK	38 degrees C / 100 degrees F
FPC 8 I3 0 Chip	OK	43 degrees C / 109 degrees F
FPC 8 BDS 0 TSensor	OK	37 degrees C / 98 degrees F
FPC 8 BDS 0 Chip	OK	36 degrees C / 96 degrees F
FPC 8 IA 0 TSensor	OK	37 degrees C / 98 degrees F
FPC 8 IA 0 Chip	OK	37 degrees C / 98 degrees F
FPC 10 Intake	OK	38 degrees C / 100 degrees F
FPC 10 Exhaust A	OK	36 degrees C / 96 degrees F
FPC 10 Exhaust B	OK	41 degrees C / 105 degrees F
FPC 10 I3 0 TSensor	OK	40 degrees C / 104 degrees F



	FPC 10 I3 0 Chip	OK	42 degrees C / 107 degrees F
	FPC 10 I3 1 TSensor	OK	40 degrees C / 104 degrees F
	FPC 10 I3 1 Chip	OK	44 degrees C / 111 degrees F
	FPC 10 I3 2 TSensor	OK	42 degrees C / 107 degrees F
	FPC 10 I3 2 Chip	OK	43 degrees C / 109 degrees F
	FPC 10 I3 3 TSensor	OK	39 degrees C / 102 degrees F
	FPC 10 I3 3 Chip	OK	44 degrees C / 111 degrees F
	FPC 10 IA 0 TSensor	OK	36 degrees C / 96 degrees F
	FPC 10 IA 0 Chip	OK	36 degrees C / 96 degrees F
	FPC 10 IA 1 TSensor	OK	43 degrees C / 109 degrees F
	FPC 10 IA 1 Chip	OK	42 degrees C / 107 degrees F
Fans	Top Fan Tray Temp	OK	37 degrees C / 98 degrees F
	Top Tray Fan 1	OK	Spinning at normal speed
	Top Tray Fan 2	OK	Spinning at normal speed
	Top Tray Fan 3	OK	Spinning at normal speed
	Top Tray Fan 4	OK	Spinning at normal speed
	Top Tray Fan 5	OK	Spinning at normal speed
	Top Tray Fan 6	OK	Spinning at normal speed
	Bottom Fan Tray Temp	OK	28 degrees C / 82 degrees F
	Bottom Tray Fan 1	OK	Spinning at normal speed
	Bottom Tray Fan 2	OK	Spinning at normal speed
	Bottom Tray Fan 3	OK	Spinning at normal speed
	Bottom Tray Fan 4	OK	Spinning at normal speed
	Bottom Tray Fan 5	OK	Spinning at normal speed
	Bottom Tray Fan 6	OK	Spinning at normal speed

#### show chassis environment (MX2020 Router)

user@host> show chassis environment

Class	Item	Status	Measurement
Temp	PSM 0	Absent	
	PSM 1	Absent	
	PSM 2	OK	41 degrees C / 105 degrees F
	PSM 3	OK	39 degrees C / 102 degrees F
	PSM 4	OK	39 degrees C / 102 degrees F
	PSM 5	OK	38 degrees C / 100 degrees F
	PSM 6	OK	38 degrees C / 100 degrees F
	PSM 7	OK	38 degrees C / 100 degrees F
	PSM 8	OK	37 degrees C / 98 degrees F
	PSM 9	Absent	
	PSM 10	Absent	
	PSM 11	OK	47 degrees C / 116 degrees F
	PSM 12	OK	45 degrees C / 113 degrees F
	PSM 13	OK	44 degrees C / 111 degrees F
	PSM 14	OK	44 degrees C / 111 degrees F
	PSM 15	OK	43 degrees C / 109 degrees F
	PSM 16	OK	42 degrees C / 107 degrees F
	PSM 17	OK	41 degrees C / 105 degrees F
	PDM 0	OK	
	PDM 1	Absent	
	PDM 2	Absent	
	PDM 3	OK	
	CB 0 IntakeA-Zone0	OK	45 degrees C / 113 degrees F
	CB 0 IntakeB-Zone1	OK	34 degrees C / 93 degrees F
	CB 0 IntakeC-Zone0	OK	48 degrees C / 118 degrees F
	CB 0 ExhaustA-Zone0	OK	45 degrees C / 113 degrees F
	CB 0 ExhaustB-Zone1	OK	37 degrees C / 98 degrees F
	CB 0 TCBC-Zone0	OK	41 degrees C / 105 degrees F
	CB 1 IntakeA-Zone0	OK	46 degrees C / 114 degrees F
	CB 1 IntakeB-Zone1	OK	42 degrees C / 107 degrees F
	CB 1 IntakeC-Zone0	OK	49 degrees C / 120 degrees F
	CB 1 ExhaustA-Zone0	OK	46 degrees C / 114 degrees F
	CB 1 ExhaustB-Zone1	OK	41 degrees C / 105 degrees F



CB 1 TCBC-Zone0	OK	46 degrees C / 114 degrees F
SPMB 0 Intake	OK	33 degrees C / 91 degrees F
SPMB 1 Intake	OK	42 degrees C / 107 degrees F
Routing Engine 0	OK	35 degrees C / 95 degrees F
Routing Engine 0 CPU	OK	34 degrees C / 93 degrees F
Routing Engine 1	OK	44 degrees C / 111 degrees F
Routing Engine 1 CPU	OK	42 degrees C / 107 degrees F
SFB 0 Intake-Zone0	OK	55 degrees C / 131 degrees F
SFB 0 Exhaust-Zone1	OK	48 degrees C / 118 degrees F
SFB 0 IntakeA-Zone0	OK	50 degrees C / 122 degrees F
SFB 0 IntakeB-Zone1	OK	40 degrees C / 104 degrees F
SFB 0 Exhaust-Zone0	OK	52 degrees C / 125 degrees F
SFB 0 SFB-XF2-Zone1	OK	61 degrees C / 141 degrees F
SFB 0 SFB-XF1-Zone0	OK	69 degrees C / 156 degrees F
SFB 0 SFB-XF0-Zone0	OK	68 degrees C / 154 degrees F
SFB 1 Intake-Zone0	OK	56 degrees C / 132 degrees F
SFB 1 Exhaust-Zone1	OK	47 degrees C / 116 degrees F
SFB 1 IntakeA-Zone0	OK	51 degrees C / 123 degrees F
SFB 1 IntakeB-Zone1	OK	40 degrees C / 104 degrees F
SFB 1 Exhaust-Zone0	OK	51 degrees C / 123 degrees F
SFB 1 SFB-XF2-Zone1	OK	62 degrees C / 143 degrees F
SFB 1 SFB-XF1-Zone0	OK	67 degrees C / 152 degrees F
SFB 1 SFB-XF0-Zone0	OK	69 degrees C / 156 degrees F
SFB 2 Intake-Zone0	OK	56 degrees C / 132 degrees F
SFB 2 Exhaust-Zone1	OK	47 degrees C / 116 degrees F
SFB 2 IntakeA-Zone0	OK	51 degrees C / 123 degrees F
SFB 2 IntakeB-Zone1	OK	40 degrees C / 104 degrees F
SFB 2 Exhaust-Zone0	OK	53 degrees C / 127 degrees F
SFB 2 SFB-XF2-Zone1	OK	65 degrees C / 149 degrees F
SFB 2 SFB-XF1-Zone0	OK	69 degrees C / 156 degrees F
SFB 2 SFB-XF0-Zone0	OK	70 degrees C / 158 degrees F
SFB 3 Intake-Zone0	OK	57 degrees C / 134 degrees F
SFB 3 Exhaust-Zone1	OK	48 degrees C / 118 degrees F
SFB 3 IntakeA-Zone0	OK	52 degrees C / 125 degrees F
SFB 3 IntakeB-Zone1	OK	41 degrees C / 105 degrees F
SFB 3 Exhaust-Zone0	OK	53 degrees C / 127 degrees F
SFB 3 SFB-XF2-Zone1	OK	66 degrees C / 150 degrees F
SFB 3 SFB-XF1-Zone0	OK	69 degrees C / 156 degrees F
SFB 3 SFB-XF0-Zone0	OK	71 degrees C / 159 degrees F
SFB 4 Intake-Zone0	OK	58 degrees C / 136 degrees F
SFB 4 Exhaust-Zone1	OK	49 degrees C / 120 degrees F
SFB 4 IntakeA-Zone0	OK	54 degrees C / 129 degrees F
SFB 4 IntakeB-Zone1	OK	42 degrees C / 107 degrees F
SFB 4 Exhaust-Zone0	OK	53 degrees C / 127 degrees F
SFB 4 SFB-XF2-Zone1	OK	64 degrees C / 147 degrees F
SFB 4 SFB-XF1-Zone0	OK	68 degrees C / 154 degrees F
SFB 4 SFB-XF0-Zone0	OK	71 degrees C / 159 degrees F
SFB 5 Intake-Zone0	OK	58 degrees C / 136 degrees F
SFB 5 Exhaust-Zone1	OK	50 degrees C / 122 degrees F
SFB 5 IntakeA-Zone0	OK	53 degrees C / 127 degrees F
SFB 5 IntakeB-Zone1	OK	43 degrees C / 109 degrees F
SFB 5 Exhaust-Zone0	OK	54 degrees C / 129 degrees F
SFB 5 SFB-XF2-Zone1	OK	66 degrees C / 150 degrees F
SFB 5 SFB-XF1-Zone0	OK	69 degrees C / 156 degrees F
SFB 5 SFB-XF0-Zone0	OK	74 degrees C / 165 degrees F
SFB 6 Intake-Zone0	OK	58 degrees C / 136 degrees F
SFB 6 Exhaust-Zone1	OK	49 degrees C / 120 degrees F
SFB 6 IntakeA-Zone0	OK	53 degrees C / 127 degrees F
SFB 6 IntakeB-Zone1	OK	43 degrees C / 109 degrees F
SFB 6 Exhaust-Zone0	OK	53 degrees C / 127 degrees F
SFB 6 SFB-XF2-Zone1	OK	65 degrees C / 149 degrees F



SFB 6 SFB-XF1-Zone0	OK	68 degrees C / 154 degrees F
SFB 6 SFB-XF0-Zone0	OK	72 degrees C / 161 degrees F
SFB 7 Intake-Zone0	OK	57 degrees C / 134 degrees F
SFB 7 Exhaust-Zone1	OK	50 degrees C / 122 degrees F
SFB 7 IntakeA-Zone0	OK	53 degrees C / 127 degrees F
SFB 7 IntakeB-Zone1	OK	43 degrees C / 109 degrees F
SFB 7 Exhaust-Zone0	OK	54 degrees C / 129 degrees F
SFB 7 SFB-XF2-Zone1	OK	68 degrees C / 154 degrees F
SFB 7 SFB-XF1-Zone0	OK	69 degrees C / 156 degrees F
SFB 7 SFB-XF0-Zone0	OK	73 degrees C / 163 degrees F
FPC 0 Intake	OK	41 degrees C / 105 degrees F
FPC 0 Exhaust A	OK	48 degrees C / 118 degrees F
FPC 0 Exhaust B	OK	62 degrees C / 143 degrees F
FPC 0 LU 0 TSen	OK	59 degrees C / 138 degrees F
FPC 0 LU 0 Chip	OK	62 degrees C / 143 degrees F
FPC 0 LU 1 TSen	OK	59 degrees C / 138 degrees F
FPC 0 LU 1 Chip	OK	64 degrees C / 147 degrees F
FPC 0 LU 2 TSen	OK	59 degrees C / 138 degrees F
FPC 0 LU 2 Chip	OK	53 degrees C / 127 degrees F
FPC 0 LU 3 TSen	OK	59 degrees C / 138 degrees F
FPC 0 LU 3 Chip	OK	53 degrees C / 127 degrees F
FPC 0 MQ 0 TSen	OK	47 degrees C / 116 degrees F
FPC 0 MQ 0 Chip	OK	49 degrees C / 120 degrees F
FPC 0 MQ 1 TSen	OK	47 degrees C / 116 degrees F
FPC 0 MQ 1 Chip	OK	51 degrees C / 123 degrees F
FPC 0 MQ 2 TSen	OK	47 degrees C / 116 degrees F
FPC 0 MQ 2 Chip	OK	44 degrees C / 111 degrees F
FPC 0 MQ 3 TSen	OK	47 degrees C / 116 degrees F
FPC 0 MQ 3 Chip	OK	45 degrees C / 113 degrees F
FPC 1 Intake	OK	40 degrees C / 104 degrees F
FPC 1 Exhaust A	OK	49 degrees C / 120 degrees F
FPC 1 Exhaust B	OK	58 degrees C / 136 degrees F
FPC 1 LU 0 TSen	OK	55 degrees C / 131 degrees F
FPC 1 LU 0 Chip	OK	56 degrees C / 132 degrees F
FPC 1 LU 1 TSen	OK	55 degrees C / 131 degrees F
FPC 1 LU 1 Chip	OK	58 degrees C / 136 degrees F
FPC 1 LU 2 TSen	OK	55 degrees C / 131 degrees F
FPC 1 LU 2 Chip	OK	49 degrees C / 120 degrees F
FPC 1 LU 3 TSen	OK	55 degrees C / 131 degrees F
FPC 1 LU 3 Chip	OK	51 degrees C / 123 degrees F
FPC 1 MQ 0 TSen	OK	47 degrees C / 116 degrees F
FPC 1 MQ 0 Chip	OK	48 degrees C / 118 degrees F
FPC 1 MQ 1 TSen	OK	47 degrees C / 116 degrees F
FPC 1 MQ 1 Chip	OK	50 degrees C / 122 degrees F
FPC 1 MQ 2 TSen	OK	47 degrees C / 116 degrees F
FPC 1 MQ 2 Chip	OK	44 degrees C / 111 degrees F
FPC 1 MQ 3 TSen	OK	47 degrees C / 116 degrees F
FPC 1 MQ 3 Chip	OK	44 degrees C / 111 degrees F
FPC 2 Intake	OK	39 degrees C / 102 degrees F
FPC 2 Exhaust A	OK	49 degrees C / 120 degrees F
FPC 2 Exhaust B	OK	61 degrees C / 141 degrees F
FPC 2 LU 0 TSen	OK	58 degrees C / 136 degrees F
FPC 2 LU 0 Chip	OK	60 degrees C / 140 degrees F
FPC 2 LU 1 TSen	OK	58 degrees C / 136 degrees F
FPC 2 LU 1 Chip	OK	65 degrees C / 149 degrees F
FPC 2 LU 2 TSen	OK	58 degrees C / 136 degrees F
FPC 2 LU 2 Chip	OK	51 degrees C / 123 degrees F
FPC 2 LU 3 TSen	OK	58 degrees C / 136 degrees F
FPC 2 LU 3 Chip	OK	53 degrees C / 127 degrees F
FPC 2 MQ 0 TSen	OK	47 degrees C / 116 degrees F
FPC 2 MQ 0 Chip	OK	50 degrees C / 122 degrees F



FPC 2 MQ 1 TSen	OK	47 degrees C / 116 degrees F
FPC 2 MQ 1 Chip	OK	52 degrees C / 125 degrees F
FPC 2 MQ 2 TSen	OK	47 degrees C / 116 degrees F
FPC 2 MQ 2 Chip	OK	45 degrees C / 113 degrees F
FPC 2 MQ 3 TSen	OK	47 degrees C / 116 degrees F
FPC 2 MQ 3 Chip	OK	46 degrees C / 114 degrees F
FPC 3 Intake	OK	40 degrees C / 104 degrees F
FPC 3 Exhaust A	OK	49 degrees C / 120 degrees F
FPC 3 Exhaust B	OK	61 degrees C / 141 degrees F
FPC 3 LU 0 TSen	OK	58 degrees C / 136 degrees F
FPC 3 LU 0 Chip	OK	61 degrees C / 141 degrees F
FPC 3 LU 1 TSen	OK	58 degrees C / 136 degrees F
FPC 3 LU 1 Chip	OK	62 degrees C / 143 degrees F
FPC 3 LU 2 TSen	OK	58 degrees C / 136 degrees F
FPC 3 LU 2 Chip	OK	51 degrees C / 123 degrees F
FPC 3 LU 3 TSen	OK	58 degrees C / 136 degrees F
FPC 3 LU 3 Chip	OK	53 degrees C / 127 degrees F
FPC 3 MQ 0 TSen	OK	48 degrees C / 118 degrees F
FPC 3 MQ 0 Chip	OK	50 degrees C / 122 degrees F
FPC 3 MQ 1 TSen	OK	48 degrees C / 118 degrees F
FPC 3 MQ 1 Chip	OK	54 degrees C / 129 degrees F
FPC 3 MQ 2 TSen	OK	48 degrees C / 118 degrees F
FPC 3 MQ 2 Chip	OK	45 degrees C / 113 degrees F
FPC 3 MQ 3 TSen	OK	48 degrees C / 118 degrees F
FPC 3 MQ 3 Chip	OK	48 degrees C / 118 degrees F
FPC 4 Intake	OK	40 degrees C / 104 degrees F
FPC 4 Exhaust A	OK	49 degrees C / 120 degrees F
FPC 4 Exhaust B	OK	62 degrees C / 143 degrees F
FPC 4 LU 0 TSen	OK	59 degrees C / 138 degrees F
FPC 4 LU 0 Chip	OK	62 degrees C / 143 degrees F
FPC 4 LU 1 TSen	OK	59 degrees C / 138 degrees F
FPC 4 LU 1 Chip	OK	65 degrees C / 149 degrees F
FPC 4 LU 2 TSen	OK	59 degrees C / 138 degrees F
FPC 4 LU 2 Chip	OK	51 degrees C / 123 degrees F
FPC 4 LU 3 TSen	OK	59 degrees C / 138 degrees F
FPC 4 LU 3 Chip	OK	53 degrees C / 127 degrees F
FPC 4 MQ 0 TSen	OK	48 degrees C / 118 degrees F
FPC 4 MQ 0 Chip	OK	52 degrees C / 125 degrees F
FPC 4 MQ 1 TSen	OK	48 degrees C / 118 degrees F
FPC 4 MQ 1 Chip	OK	53 degrees C / 127 degrees F
FPC 4 MQ 2 TSen	OK	48 degrees C / 118 degrees F
FPC 4 MQ 2 Chip	OK	46 degrees C / 114 degrees F
FPC 4 MQ 3 TSen	OK	48 degrees C / 118 degrees F
FPC 4 MQ 3 Chip	OK	47 degrees C / 116 degrees F
FPC 5 Intake	OK	41 degrees C / 105 degrees F
FPC 5 Exhaust A	OK	50 degrees C / 122 degrees F
FPC 5 Exhaust B	OK	63 degrees C / 145 degrees F
FPC 5 LU 0 TSen	OK	60 degrees C / 140 degrees F
FPC 5 LU 0 Chip	OK	63 degrees C / 145 degrees F
FPC 5 LU 1 TSen	OK	60 degrees C / 140 degrees F
FPC 5 LU 1 Chip	OK	66 degrees C / 150 degrees F
FPC 5 LU 2 TSen	OK	60 degrees C / 140 degrees F
FPC 5 LU 2 Chip	OK	56 degrees C / 132 degrees F
FPC 5 LU 3 TSen	OK	60 degrees C / 140 degrees F
FPC 5 LU 3 Chip	OK	54 degrees C / 129 degrees F
FPC 5 MQ 0 TSen	OK	49 degrees C / 120 degrees F
FPC 5 MQ 0 Chip	OK	52 degrees C / 125 degrees F
FPC 5 MQ 1 TSen	OK	49 degrees C / 120 degrees F
FPC 5 MQ 1 Chip	OK	53 degrees C / 127 degrees F
FPC 5 MQ 2 TSen	OK	49 degrees C / 120 degrees F
FPC 5 MQ 2 Chip	OK	48 degrees C / 118 degrees F



FPC 5 MQ 3 TSen	OK	49 degrees C / 120 degrees F
FPC 5 MQ 3 Chip	OK	47 degrees C / 116 degrees F
FPC 6 Intake	OK	42 degrees C / 107 degrees F
FPC 6 Exhaust A	OK	51 degrees C / 123 degrees F
FPC 6 Exhaust B	OK	63 degrees C / 145 degrees F
FPC 6 LU 0 TSen	OK	61 degrees C / 141 degrees F
FPC 6 LU 0 Chip	OK	64 degrees C / 147 degrees F
FPC 6 LU 1 TSen	OK	61 degrees C / 141 degrees F
FPC 6 LU 1 Chip	OK	66 degrees C / 150 degrees F
FPC 6 LU 2 TSen	OK	61 degrees C / 141 degrees F
FPC 6 LU 2 Chip	OK	56 degrees C / 132 degrees F
FPC 6 LU 3 TSen	OK	61 degrees C / 141 degrees F
FPC 6 LU 3 Chip	OK	56 degrees C / 132 degrees F
FPC 6 MQ 0 TSen	OK	50 degrees C / 122 degrees F
FPC 6 MQ 0 Chip	OK	56 degrees C / 132 degrees F
FPC 6 MQ 1 TSen	OK	50 degrees C / 122 degrees F
FPC 6 MQ 1 Chip	OK	59 degrees C / 138 degrees F
FPC 6 MQ 2 TSen	OK	50 degrees C / 122 degrees F
FPC 6 MQ 2 Chip	OK	49 degrees C / 120 degrees F
FPC 6 MQ 3 TSen	OK	50 degrees C / 122 degrees F
FPC 6 MQ 3 Chip	OK	49 degrees C / 120 degrees F
FPC 7 Intake	OK	41 degrees C / 105 degrees F
FPC 7 Exhaust A	OK	51 degrees C / 123 degrees F
FPC 7 Exhaust B	OK	63 degrees C / 145 degrees F
FPC 7 LU 0 TSen	OK	60 degrees C / 140 degrees F
FPC 7 LU 0 Chip	OK	61 degrees C / 141 degrees F
FPC 7 LU 1 TSen	OK	60 degrees C / 140 degrees F
FPC 7 LU 1 Chip	OK	65 degrees C / 149 degrees F
FPC 7 LU 2 TSen	OK	60 degrees C / 140 degrees F
FPC 7 LU 2 Chip	OK	54 degrees C / 129 degrees F
FPC 7 LU 3 TSen	OK	60 degrees C / 140 degrees F
FPC 7 LU 3 Chip	OK	53 degrees C / 127 degrees F
FPC 7 MQ 0 TSen	OK	50 degrees C / 122 degrees F
FPC 7 MQ 0 Chip	OK	53 degrees C / 127 degrees F
FPC 7 MQ 1 TSen	OK	50 degrees C / 122 degrees F
FPC 7 MQ 1 Chip	OK	54 degrees C / 129 degrees F
FPC 7 MQ 2 TSen	OK	50 degrees C / 122 degrees F
FPC 7 MQ 2 Chip	OK	47 degrees C / 116 degrees F
FPC 7 MQ 3 TSen	OK	50 degrees C / 122 degrees F
FPC 7 MQ 3 Chip	OK	47 degrees C / 116 degrees F
FPC 8 Intake	OK	41 degrees C / 105 degrees F
FPC 8 Exhaust A	OK	50 degrees C / 122 degrees F
FPC 8 Exhaust B	OK	62 degrees C / 143 degrees F
FPC 8 LU 0 TSen	OK	59 degrees C / 138 degrees F
FPC 8 LU 0 Chip	OK	62 degrees C / 143 degrees F
FPC 8 LU 1 TSen	OK	59 degrees C / 138 degrees F
FPC 8 LU 1 Chip	OK	64 degrees C / 147 degrees F
FPC 8 LU 2 TSen	OK	59 degrees C / 138 degrees F
FPC 8 LU 2 Chip	OK	55 degrees C / 131 degrees F
FPC 8 LU 3 TSen	OK	59 degrees C / 138 degrees F
FPC 8 LU 3 Chip	OK	54 degrees C / 129 degrees F
FPC 8 MQ 0 TSen	OK	49 degrees C / 120 degrees F
FPC 8 MQ 0 Chip	OK	51 degrees C / 123 degrees F
FPC 8 MQ 1 TSen	OK	49 degrees C / 120 degrees F
FPC 8 MQ 1 Chip	OK	52 degrees C / 125 degrees F
FPC 8 MQ 2 TSen	OK	49 degrees C / 120 degrees F
FPC 8 MQ 2 Chip	OK	46 degrees C / 114 degrees F
FPC 8 MQ 3 TSen	OK	49 degrees C / 120 degrees F
FPC 8 MQ 3 Chip	OK	47 degrees C / 116 degrees F
FPC 9 Intake	OK	42 degrees C / 107 degrees F
FPC 9 Exhaust A	OK	51 degrees C / 123 degrees F



FPC 9 Exhaust B	OK	63 degrees C / 145 degrees F
FPC 9 LU 0 TSen	OK	60 degrees C / 140 degrees F
FPC 9 LU 0 Chip	OK	65 degrees C / 149 degrees F
FPC 9 LU 1 TSen	OK	60 degrees C / 140 degrees F
FPC 9 LU 1 Chip	OK	67 degrees C / 152 degrees F
FPC 9 LU 2 TSen	OK	60 degrees C / 140 degrees F
FPC 9 LU 2 Chip	OK	54 degrees C / 129 degrees F
FPC 9 LU 3 TSen	OK	60 degrees C / 140 degrees F
FPC 9 LU 3 Chip	OK	54 degrees C / 129 degrees F
FPC 9 MQ 0 TSen	OK	51 degrees C / 123 degrees F
FPC 9 MQ 0 Chip	OK	55 degrees C / 131 degrees F
FPC 9 MQ 1 TSen	OK	51 degrees C / 123 degrees F
FPC 9 MQ 1 Chip	OK	59 degrees C / 138 degrees F
FPC 9 MQ 2 TSen	OK	51 degrees C / 123 degrees F
FPC 9 MQ 2 Chip	OK	49 degrees C / 120 degrees F
FPC 9 MQ 3 TSen	OK	51 degrees C / 123 degrees F
FPC 9 MQ 3 Chip	OK	49 degrees C / 120 degrees F
FPC 10 Intake	OK	44 degrees C / 111 degrees F
FPC 10 Exhaust A	OK	49 degrees C / 120 degrees F
FPC 10 Exhaust B	OK	55 degrees C / 131 degrees F
FPC 10 LU 0 TSen	OK	54 degrees C / 129 degrees F
FPC 10 LU 0 Chip	OK	55 degrees C / 131 degrees F
FPC 10 LU 1 TSen	OK	54 degrees C / 129 degrees F
FPC 10 LU 1 Chip	OK	59 degrees C / 138 degrees F
FPC 10 LU 2 TSen	OK	54 degrees C / 129 degrees F
FPC 10 LU 2 Chip	OK	52 degrees C / 125 degrees F
FPC 10 LU 3 TSen	OK	54 degrees C / 129 degrees F
FPC 10 LU 3 Chip	OK	51 degrees C / 123 degrees F
FPC 10 MQ 0 TSen	OK	48 degrees C / 118 degrees F
FPC 10 MQ 0 Chip	OK	49 degrees C / 120 degrees F
FPC 10 MQ 1 TSen	OK	48 degrees C / 118 degrees F
FPC 10 MQ 1 Chip	OK	52 degrees C / 125 degrees F
FPC 10 MQ 2 TSen	OK	48 degrees C / 118 degrees F
FPC 10 MQ 2 Chip	OK	47 degrees C / 116 degrees F
FPC 10 MQ 3 TSen	OK	48 degrees C / 118 degrees F
FPC 10 MQ 3 Chip	OK	47 degrees C / 116 degrees F
FPC 11 Intake	OK	30 degrees C / 86 degrees F
FPC 11 Exhaust A	OK	35 degrees C / 95 degrees F
FPC 11 Exhaust B	OK	30 degrees C / 86 degrees F
FPC 11 LU 0 TSen	OK	57 degrees C / 134 degrees F
FPC 11 LU 0 Chip	OK	58 degrees C / 136 degrees F
FPC 11 LU 1 TSen	OK	57 degrees C / 134 degrees F
FPC 11 LU 1 Chip	OK	62 degrees C / 143 degrees F
FPC 11 LU 2 TSen	OK	57 degrees C / 134 degrees F
FPC 11 LU 2 Chip	OK	53 degrees C / 127 degrees F
FPC 11 LU 3 TSen	OK	57 degrees C / 134 degrees F
FPC 11 LU 3 Chip	OK	54 degrees C / 129 degrees F
FPC 11 MQ 0 TSen	OK	52 degrees C / 125 degrees F
FPC 11 MQ 0 Chip	OK	52 degrees C / 125 degrees F
FPC 11 MQ 1 TSen	OK	52 degrees C / 125 degrees F
FPC 11 MQ 1 Chip	OK	57 degrees C / 134 degrees F
FPC 11 MQ 2 TSen	OK	52 degrees C / 125 degrees F
FPC 11 MQ 2 Chip	OK	48 degrees C / 118 degrees F
FPC 11 MQ 3 TSen	OK	52 degrees C / 125 degrees F
FPC 11 MQ 3 Chip	OK	52 degrees C / 125 degrees F
FPC 12 Intake	OK	40 degrees C / 104 degrees F
FPC 12 Exhaust A	OK	47 degrees C / 116 degrees F
FPC 12 Exhaust B	OK	52 degrees C / 125 degrees F
FPC 12 LU 0 TSen	OK	51 degrees C / 123 degrees F
FPC 12 LU 0 Chip	OK	52 degrees C / 125 degrees F
FPC 12 LU 1 TSen	OK	51 degrees C / 123 degrees F



FPC 12 LU 1 Chip	OK	55 degrees C / 131 degrees F
FPC 12 LU 2 TSen	OK	51 degrees C / 123 degrees F
FPC 12 LU 2 Chip	OK	47 degrees C / 116 degrees F
FPC 12 LU 3 TSen	OK	51 degrees C / 123 degrees F
FPC 12 LU 3 Chip	OK	50 degrees C / 122 degrees F
FPC 12 MQ 0 TSen	OK	46 degrees C / 114 degrees F
FPC 12 MQ 0 Chip	OK	46 degrees C / 114 degrees F
FPC 12 MQ 1 TSen	OK	46 degrees C / 114 degrees F
FPC 12 MQ 1 Chip	OK	50 degrees C / 122 degrees F
FPC 12 MQ 2 TSen	OK	46 degrees C / 114 degrees F
FPC 12 MQ 2 Chip	OK	44 degrees C / 111 degrees F
FPC 12 MQ 3 TSen	OK	46 degrees C / 114 degrees F
FPC 12 MQ 3 Chip	OK	46 degrees C / 114 degrees F
FPC 13 Intake	OK	40 degrees C / 104 degrees F
FPC 13 Exhaust A	OK	48 degrees C / 118 degrees F
FPC 13 Exhaust B	OK	52 degrees C / 125 degrees F
FPC 13 LU 0 TSen	OK	51 degrees C / 123 degrees F
FPC 13 LU 0 Chip	OK	52 degrees C / 125 degrees F
FPC 13 LU 1 TSen	OK	51 degrees C / 123 degrees F
FPC 13 LU 1 Chip	OK	55 degrees C / 131 degrees F
FPC 13 LU 2 TSen	OK	51 degrees C / 123 degrees F
FPC 13 LU 2 Chip	OK	48 degrees C / 118 degrees F
FPC 13 LU 3 TSen	OK	51 degrees C / 123 degrees F
FPC 13 LU 3 Chip	OK	48 degrees C / 118 degrees F
FPC 13 MQ 0 TSen	OK	46 degrees C / 114 degrees F
FPC 13 MQ 0 Chip	OK	46 degrees C / 114 degrees F
FPC 13 MQ 1 TSen	OK	46 degrees C / 114 degrees F
FPC 13 MQ 1 Chip	OK	50 degrees C / 122 degrees F
FPC 13 MQ 2 TSen	OK	46 degrees C / 114 degrees F
FPC 13 MQ 2 Chip	OK	44 degrees C / 111 degrees F
FPC 13 MQ 3 TSen	OK	46 degrees C / 114 degrees F
FPC 13 MQ 3 Chip	OK	46 degrees C / 114 degrees F
FPC 14 Intake	OK	40 degrees C / 104 degrees F
FPC 14 Exhaust A	OK	50 degrees C / 122 degrees F
FPC 14 Exhaust B	OK	51 degrees C / 123 degrees F
FPC 14 LU 0 TSen	OK	50 degrees C / 122 degrees F
FPC 14 LU 0 Chip	OK	50 degrees C / 122 degrees F
FPC 14 LU 1 TSen	OK	50 degrees C / 122 degrees F
FPC 14 LU 1 Chip	OK	54 degrees C / 129 degrees F
FPC 14 LU 2 TSen	OK	50 degrees C / 122 degrees F
FPC 14 LU 2 Chip	OK	47 degrees C / 116 degrees F
FPC 14 LU 3 TSen	OK	50 degrees C / 122 degrees F
FPC 14 LU 3 Chip	OK	49 degrees C / 120 degrees F
FPC 14 MQ 0 TSen	OK	47 degrees C / 116 degrees F
FPC 14 MQ 0 Chip	OK	46 degrees C / 114 degrees F
FPC 14 MQ 1 TSen	OK	47 degrees C / 116 degrees F
FPC 14 MQ 1 Chip	OK	51 degrees C / 123 degrees F
FPC 14 MQ 2 TSen	OK	47 degrees C / 116 degrees F
FPC 14 MQ 2 Chip	OK	45 degrees C / 113 degrees F
FPC 14 MQ 3 TSen	OK	47 degrees C / 116 degrees F
FPC 14 MQ 3 Chip	OK	48 degrees C / 118 degrees F
FPC 15 Intake	OK	44 degrees C / 111 degrees F
FPC 15 Exhaust A	OK	49 degrees C / 120 degrees F
FPC 15 Exhaust B	OK	60 degrees C / 140 degrees F
FPC 15 LU 0 TSen	OK	50 degrees C / 122 degrees F
FPC 15 LU 0 Chip	OK	56 degrees C / 132 degrees F
FPC 15 LU 1 TSen	OK	50 degrees C / 122 degrees F
FPC 15 LU 1 Chip	OK	50 degrees C / 122 degrees F
FPC 15 LU 2 TSen	OK	50 degrees C / 122 degrees F
FPC 15 LU 2 Chip	OK	58 degrees C / 136 degrees F
FPC 15 LU 3 TSen	OK	50 degrees C / 122 degrees F



FPC 15 LU 3 Chip	OK	63 degrees C / 145 degrees F
FPC 15 XM 0 TSen	OK	50 degrees C / 122 degrees F
FPC 15 XM 0 Chip	OK	56 degrees C / 132 degrees F
FPC 15 XF 0 TSen	OK	50 degrees C / 122 degrees F
FPC 15 XF 0 Chip	OK	68 degrees C / 154 degrees F
FPC 15 PLX Switch TSen	OK	50 degrees C / 122 degrees F
FPC 15 PLX Switch Chip	OK	56 degrees C / 132 degrees F
FPC 16 Intake	OK	42 degrees C / 107 degrees F
FPC 16 Exhaust A	OK	51 degrees C / 123 degrees F
FPC 16 Exhaust B	OK	53 degrees C / 127 degrees F
FPC 16 LU 0 TSen	OK	51 degrees C / 123 degrees F
FPC 16 LU 0 Chip	OK	52 degrees C / 125 degrees F
FPC 16 LU 1 TSen	OK	51 degrees C / 123 degrees F
FPC 16 LU 1 Chip	OK	55 degrees C / 131 degrees F
FPC 16 LU 2 TSen	OK	51 degrees C / 123 degrees F
FPC 16 LU 2 Chip	OK	48 degrees C / 118 degrees F
FPC 16 LU 3 TSen	OK	51 degrees C / 123 degrees F
FPC 16 LU 3 Chip	OK	49 degrees C / 120 degrees F
FPC 16 MQ 0 TSen	OK	49 degrees C / 120 degrees F
FPC 16 MQ 0 Chip	OK	48 degrees C / 118 degrees F
FPC 16 MQ 1 TSen	OK	49 degrees C / 120 degrees F
FPC 16 MQ 1 Chip	OK	53 degrees C / 127 degrees F
FPC 16 MQ 2 TSen	OK	49 degrees C / 120 degrees F
FPC 16 MQ 2 Chip	OK	46 degrees C / 114 degrees F
FPC 16 MQ 3 TSen	OK	49 degrees C / 120 degrees F
FPC 16 MQ 3 Chip	OK	49 degrees C / 120 degrees F
FPC 17 Intake	OK	43 degrees C / 109 degrees F
FPC 17 Exhaust A	OK	51 degrees C / 123 degrees F
FPC 17 Exhaust B	OK	55 degrees C / 131 degrees F
FPC 17 LU 0 TSen	OK	54 degrees C / 129 degrees F
FPC 17 LU 0 Chip	OK	57 degrees C / 134 degrees F
FPC 17 LU 1 TSen	OK	54 degrees C / 129 degrees F
FPC 17 LU 1 Chip	OK	60 degrees C / 140 degrees F
FPC 17 LU 2 TSen	OK	54 degrees C / 129 degrees F
FPC 17 LU 2 Chip	OK	53 degrees C / 127 degrees F
FPC 17 LU 3 TSen	OK	54 degrees C / 129 degrees F
FPC 17 LU 3 Chip	OK	53 degrees C / 127 degrees F
FPC 17 MQ 0 TSen	OK	49 degrees C / 120 degrees F
FPC 17 MQ 0 Chip	OK	50 degrees C / 122 degrees F
FPC 17 MQ 1 TSen	OK	49 degrees C / 120 degrees F
FPC 17 MQ 1 Chip	OK	54 degrees C / 129 degrees F
FPC 17 MQ 2 TSen	OK	49 degrees C / 120 degrees F
FPC 17 MQ 2 Chip	OK	47 degrees C / 116 degrees F
FPC 17 MQ 3 TSen	OK	49 degrees C / 120 degrees F
FPC 17 MQ 3 Chip	OK	51 degrees C / 123 degrees F
FPC 18 Intake	OK	44 degrees C / 111 degrees F
FPC 18 Exhaust A	OK	53 degrees C / 127 degrees F
FPC 18 Exhaust B	OK	57 degrees C / 134 degrees F
FPC 18 LU 0 TSen	OK	56 degrees C / 132 degrees F
FPC 18 LU 0 Chip	OK	57 degrees C / 134 degrees F
FPC 18 LU 1 TSen	OK	56 degrees C / 132 degrees F
FPC 18 LU 1 Chip	OK	62 degrees C / 143 degrees F
FPC 18 LU 2 TSen	OK	56 degrees C / 132 degrees F
FPC 18 LU 2 Chip	OK	53 degrees C / 127 degrees F
FPC 18 LU 3 TSen	OK	56 degrees C / 132 degrees F
FPC 18 LU 3 Chip	OK	55 degrees C / 131 degrees F
FPC 18 MQ 0 TSen	OK	51 degrees C / 123 degrees F
FPC 18 MQ 0 Chip	OK	54 degrees C / 129 degrees F
FPC 18 MQ 1 TSen	OK	51 degrees C / 123 degrees F
FPC 18 MQ 1 Chip	OK	58 degrees C / 136 degrees F
FPC 18 MQ 2 TSen	OK	51 degrees C / 123 degrees F



FPC 18 MQ 2 Chip	OK	50 degrees C / 122 degrees F
FPC 18 MQ 3 TSen	OK	51 degrees C / 123 degrees F
FPC 18 MQ 3 Chip	OK	53 degrees C / 127 degrees F
FPC 19 Intake	OK	48 degrees C / 118 degrees F
FPC 19 Exhaust A	OK	56 degrees C / 132 degrees F
FPC 19 Exhaust B	OK	64 degrees C / 147 degrees F
FPC 19 LU 0 TSen	OK	63 degrees C / 145 degrees F
FPC 19 LU 0 Chip	OK	64 degrees C / 147 degrees F
FPC 19 LU 1 TSen	OK	63 degrees C / 145 degrees F
FPC 19 LU 1 Chip	OK	70 degrees C / 158 degrees F
FPC 19 LU 2 TSen	OK	63 degrees C / 145 degrees F
FPC 19 LU 2 Chip	OK	61 degrees C / 141 degrees F
FPC 19 LU 3 TSen	OK	63 degrees C / 145 degrees F
FPC 19 LU 3 Chip	OK	62 degrees C / 143 degrees F
FPC 19 MQ 0 TSen	OK	56 degrees C / 132 degrees F
FPC 19 MQ 0 Chip	OK	60 degrees C / 140 degrees F
FPC 19 MQ 1 TSen	OK	56 degrees C / 132 degrees F
FPC 19 MQ 1 Chip	OK	62 degrees C / 143 degrees F
FPC 19 MQ 2 TSen	OK	56 degrees C / 132 degrees F
FPC 19 MQ 2 Chip	OK	56 degrees C / 132 degrees F
FPC 19 MQ 3 TSen	OK	56 degrees C / 132 degrees F
FPC 19 MQ 3 Chip	OK	57 degrees C / 134 degrees F
ADC 0 Intake	OK	40 degrees C / 104 degrees F
ADC 0 Exhaust	OK	52 degrees C / 125 degrees F
ADC 0 ADC-XF1	OK	59 degrees C / 138 degrees F
ADC 0 ADC-XF0	OK	66 degrees C / 150 degrees F
ADC 1 Intake	OK	38 degrees C / 100 degrees F
ADC 1 Exhaust	OK	50 degrees C / 122 degrees F
ADC 1 ADC-XF1	OK	59 degrees C / 138 degrees F
ADC 1 ADC-XF0	OK	63 degrees C / 145 degrees F
ADC 2 Intake	OK	37 degrees C / 98 degrees F
ADC 2 Exhaust	OK	52 degrees C / 125 degrees F
ADC 2 ADC-XF1	OK	53 degrees C / 127 degrees F
ADC 2 ADC-XF0	OK	61 degrees C / 141 degrees F
ADC 3 Intake	OK	40 degrees C / 104 degrees F
ADC 3 Exhaust	OK	51 degrees C / 123 degrees F
ADC 3 ADC-XF1	OK	61 degrees C / 141 degrees F
ADC 3 ADC-XF0	OK	64 degrees C / 147 degrees F
ADC 4 Intake	OK	39 degrees C / 102 degrees F
ADC 4 Exhaust	OK	51 degrees C / 123 degrees F
ADC 4 ADC-XF1	OK	60 degrees C / 140 degrees F
ADC 4 ADC-XF0	OK	63 degrees C / 145 degrees F
ADC 5 Intake	OK	38 degrees C / 100 degrees F
ADC 5 Exhaust	OK	54 degrees C / 129 degrees F
ADC 5 ADC-XF1	OK	56 degrees C / 132 degrees F
ADC 5 ADC-XF0	OK	67 degrees C / 152 degrees F
ADC 6 Intake	OK	39 degrees C / 102 degrees F
ADC 6 Exhaust	OK	52 degrees C / 125 degrees F
ADC 6 ADC-XF1	OK	59 degrees C / 138 degrees F
ADC 6 ADC-XF0	OK	66 degrees C / 150 degrees F
ADC 7 Intake	OK	39 degrees C / 102 degrees F
ADC 7 Exhaust	OK	54 degrees C / 129 degrees F
ADC 7 ADC-XF1	OK	62 degrees C / 143 degrees F
ADC 7 ADC-XF0	OK	70 degrees C / 158 degrees F
ADC 8 Intake	OK	39 degrees C / 102 degrees F
ADC 8 Exhaust	OK	52 degrees C / 125 degrees F
ADC 8 ADC-XF1	OK	61 degrees C / 141 degrees F
ADC 8 ADC-XF0	OK	65 degrees C / 149 degrees F
ADC 9 Intake	OK	41 degrees C / 105 degrees F
ADC 9 Exhaust	OK	51 degrees C / 123 degrees F
ADC 9 ADC-XF1	OK	63 degrees C / 145 degrees F



ADC 9 ADC-XF0	OK	63 degrees C / 145 degrees F
ADC 10 Intake	OK	48 degrees C / 118 degrees F
ADC 10 Exhaust	OK	53 degrees C / 127 degrees F
ADC 10 ADC-XF1	OK	67 degrees C / 152 degrees F
ADC 10 ADC-XF0	OK	66 degrees C / 150 degrees F
ADC 12 Intake	OK	49 degrees C / 120 degrees F
ADC 12 Exhaust	OK	54 degrees C / 129 degrees F
ADC 12 ADC-XF1	OK	67 degrees C / 152 degrees F
ADC 12 ADC-XF0	OK	67 degrees C / 152 degrees F
ADC 13 Intake	OK	49 degrees C / 120 degrees F
ADC 13 Exhaust	OK	57 degrees C / 134 degrees F
ADC 13 ADC-XF1	OK	66 degrees C / 150 degrees F
ADC 13 ADC-XF0	OK	69 degrees C / 156 degrees F
ADC 14 Intake	OK	51 degrees C / 123 degrees F
ADC 14 Exhaust	OK	59 degrees C / 138 degrees F
ADC 14 ADC-XF1	OK	69 degrees C / 156 degrees F
ADC 14 ADC-XF0	OK	74 degrees C / 165 degrees F
ADC 15 Intake	OK	50 degrees C / 122 degrees F
ADC 15 Exhaust	OK	59 degrees C / 138 degrees F
ADC 15 ADC-XF1	OK	68 degrees C / 154 degrees F
ADC 15 ADC-XF0	OK	69 degrees C / 156 degrees F
ADC 16 Intake	OK	52 degrees C / 125 degrees F
ADC 16 Exhaust	OK	58 degrees C / 136 degrees F
ADC 16 ADC-XF1	OK	68 degrees C / 154 degrees F
ADC 16 ADC-XF0	OK	70 degrees C / 158 degrees F
ADC 17 Intake	OK	52 degrees C / 125 degrees F
ADC 17 Exhaust	OK	59 degrees C / 138 degrees F
ADC 17 ADC-XF1	OK	69 degrees C / 156 degrees F
ADC 17 ADC-XF0	OK	71 degrees C / 159 degrees F
ADC 18 Intake	OK	53 degrees C / 127 degrees F
ADC 18 Exhaust	OK	59 degrees C / 138 degrees F
ADC 18 ADC-XF1	OK	68 degrees C / 154 degrees F
ADC 18 ADC-XF0	OK	73 degrees C / 163 degrees F
ADC 19 Intake	OK	50 degrees C / 122 degrees F
ADC 19 Exhaust	OK	59 degrees C / 138 degrees F
ADC 19 ADC-XF1	OK	68 degrees C / 154 degrees F
ADC 19 ADC-XF0	OK	72 degrees C / 161 degrees F
Fans Fan Tray 0 Fan 1	OK	7440 RPM
Fan Tray 0 Fan 2	OK	7200 RPM
Fan Tray 0 Fan 3	OK	6960 RPM
Fan Tray 0 Fan 4	OK	7200 RPM
Fan Tray 0 Fan 5	OK	7080 RPM
Fan Tray 0 Fan 6	OK	6840 RPM
Fan Tray 1 Fan 1	OK	6840 RPM
Fan Tray 1 Fan 2	OK	6960 RPM
Fan Tray 1 Fan 3	OK	6960 RPM
Fan Tray 1 Fan 4	OK	7080 RPM
Fan Tray 1 Fan 5	OK	6960 RPM
Fan Tray 1 Fan 6	OK	6960 RPM
Fan Tray 2 Fan 1	OK	8640 RPM
Fan Tray 2 Fan 2	OK	8640 RPM
Fan Tray 2 Fan 3	OK	8760 RPM
Fan Tray 2 Fan 4	OK	8760 RPM
Fan Tray 2 Fan 5	OK	8640 RPM
Fan Tray 2 Fan 6	OK	8640 RPM
Fan Tray 3 Fan 1	OK	8520 RPM
Fan Tray 3 Fan 2	OK	8520 RPM
Fan Tray 3 Fan 3	OK	8640 RPM
Fan Tray 3 Fan 4	OK	8640 RPM
Fan Tray 3 Fan 5	OK	8520 RPM
Fan Tray 3 Fan 6	OK	8520 RPM



**show chassis  
environment (MX2010  
Router)**

user@host> show chassis environment

Class	Item	Status	Measurement
Temp	PSM 0	OK	7 degrees C / 44 degrees F
	PSM 1	OK	7 degrees C / 44 degrees F
	PSM 2	OK	7 degrees C / 44 degrees F
	PSM 3	OK	6 degrees C / 42 degrees F
	PSM 4	OK	6 degrees C / 42 degrees F
	PSM 5	OK	6 degrees C / 42 degrees F
	PSM 6	OK	6 degrees C / 42 degrees F
	PSM 7	OK	7 degrees C / 44 degrees F
	PSM 8	OK	7 degrees C / 44 degrees F
	PDM 0	OK	
	PDM 1	Absent	
	CB 0 IntakeA-Zone0	OK	14 degrees C / 57 degrees F
	CB 0 IntakeB-Zone1	OK	7 degrees C / 44 degrees F
	CB 0 IntakeC-Zone0	OK	22 degrees C / 71 degrees F
	CB 0 ExhaustA-Zone0	OK	14 degrees C / 57 degrees F
	CB 0 ExhaustB-Zone1	OK	9 degrees C / 48 degrees F
	CB 0 TCBC-Zone0	OK	11 degrees C / 51 degrees F
	CB 1 IntakeA-Zone0	OK	9 degrees C / 48 degrees F
	CB 1 IntakeB-Zone1	OK	5 degrees C / 41 degrees F
	CB 1 IntakeC-Zone0	OK	20 degrees C / 68 degrees F
	CB 1 ExhaustA-Zone0	OK	12 degrees C / 53 degrees F
	CB 1 ExhaustB-Zone1	OK	7 degrees C / 44 degrees F
	CB 1 TCBC-Zone0	OK	10 degrees C / 50 degrees F
	SPMB 0 Intake	OK	5 degrees C / 41 degrees F
	SPMB 1 Intake	OK	4 degrees C / 39 degrees F
	Routing Engine 0	OK	9 degrees C / 48 degrees F
	Routing Engine 0 CPU	OK	9 degrees C / 48 degrees F
	Routing Engine 1	OK	6 degrees C / 42 degrees F
	Routing Engine 1 CPU	OK	6 degrees C / 42 degrees F
	SFB 0 Intake-Zone0	OK	26 degrees C / 78 degrees F
	SFB 0 Exhaust-Zone1	OK	17 degrees C / 62 degrees F
	SFB 0 IntakeA-Zone0	OK	16 degrees C / 60 degrees F
	SFB 0 IntakeB-Zone1	OK	11 degrees C / 51 degrees F
	SFB 0 Exhaust-Zone0	OK	18 degrees C / 64 degrees F
	SFB 0 SFB-XF2-Zone1	OK	25 degrees C / 77 degrees F
	SFB 0 SFB-XF1-Zone0	OK	23 degrees C / 73 degrees F
	SFB 0 SFB-XF0-Zone0	OK	33 degrees C / 91 degrees F
	SFB 1 Intake-Zone0	OK	27 degrees C / 80 degrees F
	SFB 1 Exhaust-Zone1	OK	15 degrees C / 59 degrees F
	SFB 1 IntakeA-Zone0	OK	20 degrees C / 68 degrees F
	SFB 1 IntakeB-Zone1	OK	10 degrees C / 50 degrees F
	SFB 1 Exhaust-Zone0	OK	19 degrees C / 66 degrees F
	SFB 1 SFB-XF2-Zone1	OK	26 degrees C / 78 degrees F
	SFB 1 SFB-XF1-Zone0	OK	27 degrees C / 80 degrees F
	SFB 1 SFB-XF0-Zone0	OK	32 degrees C / 89 degrees F
	SFB 2 Intake-Zone0	OK	21 degrees C / 69 degrees F
	SFB 2 Exhaust-Zone1	OK	13 degrees C / 55 degrees F
	SFB 2 IntakeA-Zone0	OK	18 degrees C / 64 degrees F
	SFB 2 IntakeB-Zone1	OK	9 degrees C / 48 degrees F
	SFB 2 Exhaust-Zone0	OK	16 degrees C / 60 degrees F
	SFB 2 SFB-XF2-Zone1	OK	24 degrees C / 75 degrees F
	SFB 2 SFB-XF1-Zone0	OK	21 degrees C / 69 degrees F
	SFB 2 SFB-XF0-Zone0	OK	26 degrees C / 78 degrees F
	SFB 4 Intake-Zone0	OK	28 degrees C / 82 degrees F
	SFB 4 Exhaust-Zone1	OK	16 degrees C / 60 degrees F
SFB 4	IntakeA-Zone0	OK	18 degrees C / 64 degrees F
	SFB 4 IntakeB-Zone1	OK	11 degrees C / 51 degrees F
	SFB 4 Exhaust-Zone0	OK	19 degrees C / 66 degrees F
	SFB 4 SFB-XF2-Zone1	OK	27 degrees C / 80 degrees F



SFB 4 SFB-XF1-Zone0	OK	27 degrees C / 80 degrees F
SFB 4 SFB-XF0-Zone0	OK	32 degrees C / 89 degrees F
SFB 5 Intake-Zone0	OK	22 degrees C / 71 degrees F
SFB 5 Exhaust-Zone1	OK	14 degrees C / 57 degrees F
SFB 5 IntakeA-Zone0	OK	18 degrees C / 64 degrees F
SFB 5 IntakeB-Zone1	OK	10 degrees C / 50 degrees F
SFB 5 Exhaust-Zone0	OK	17 degrees C / 62 degrees F
SFB 5 SFB-XF2-Zone1	OK	22 degrees C / 71 degrees F
SFB 5 SFB-XF1-Zone0	OK	29 degrees C / 84 degrees F
SFB 5 SFB-XF0-Zone0	OK	27 degrees C / 80 degrees F
SFB 6 Intake-Zone0	OK	27 degrees C / 80 degrees F
SFB 6 Exhaust-Zone1	OK	13 degrees C / 55 degrees F
SFB 6 IntakeA-Zone0	OK	19 degrees C / 66 degrees F
SFB 6 IntakeB-Zone1	OK	10 degrees C / 50 degrees F
SFB 6 Exhaust-Zone0	OK	20 degrees C / 68 degrees F
SFB 6 SFB-XF2-Zone1	OK	24 degrees C / 75 degrees F
SFB 6 SFB-XF1-Zone0	OK	32 degrees C / 89 degrees F
SFB 6 SFB-XF0-Zone0	OK	33 degrees C / 91 degrees F
SFB 7 Intake-Zone0	OK	25 degrees C / 77 degrees F
SFB 7 Exhaust-Zone1	OK	13 degrees C / 55 degrees F
SFB 7 IntakeA-Zone0	OK	14 degrees C / 57 degrees F
SFB 7 IntakeB-Zone1	OK	8 degrees C / 46 degrees F
SFB 7 Exhaust-Zone0	OK	17 degrees C / 62 degrees F
SFB 7 SFB-XF2-Zone1	OK	21 degrees C / 69 degrees F
SFB 7 SFB-XF1-Zone0	OK	21 degrees C / 69 degrees F
SFB 7 SFB-XF0-Zone0	OK	33 degrees C / 91 degrees F
FPC 0 Intake	OK	13 degrees C / 55 degrees F
FPC 0 Exhaust A	OK	13 degrees C / 55 degrees F
FPC 0 Exhaust B	OK	14 degrees C / 57 degrees F
FPC 0 LU 0 TSen	OK	28 degrees C / 82 degrees F
FPC 0 LU 0 Chip	OK	25 degrees C / 77 degrees F
FPC 0 LU 1 TSen	OK	28 degrees C / 82 degrees F
FPC 0 LU 1 Chip	OK	27 degrees C / 80 degrees F
FPC 0 LU 2 TSen	OK	28 degrees C / 82 degrees F
FPC 0 LU 2 Chip	OK	19 degrees C / 66 degrees F
FPC 0 LU 3 TSen	OK	28 degrees C / 82 degrees F
FPC 0 LU 3 Chip	OK	23 degrees C / 73 degrees F
FPC 0 XM 0 TSen	OK	28 degrees C / 82 degrees F
FPC 0 XM 0 Chip	OK	33 degrees C / 91 degrees F
FPC 0 XM 1 TSen	OK	28 degrees C / 82 degrees F
FPC 0 XM 1 Chip	OK	26 degrees C / 78 degrees F
FPC 0 PLX Switch TSen	OK	28 degrees C / 82 degrees F
FPC 0 PLX Switch Chip	OK	26 degrees C / 78 degrees F
FPC 1 Intake	OK	10 degrees C / 50 degrees F
FPC 1 Exhaust A	OK	24 degrees C / 75 degrees F
FPC 1 Exhaust B	OK	28 degrees C / 82 degrees F
FPC 1 LU 0 TSen	OK	22 degrees C / 71 degrees F
FPC 1 LU 0 Chip	OK	31 degrees C / 87 degrees F
FPC 1 LU 1 TSen	OK	22 degrees C / 71 degrees F
FPC 1 LU 1 Chip	OK	21 degrees C / 69 degrees F
FPC 1 LU 2 TSen	OK	22 degrees C / 71 degrees F
FPC 1 LU 2 Chip	OK	25 degrees C / 77 degrees F
FPC 1 LU 3 TSen	OK	22 degrees C / 71 degrees F
FPC 1 LU 3 Chip	OK	33 degrees C / 91 degrees F
FPC 1 XM 0 TSen	OK	22 degrees C / 71 degrees F
FPC 1 XM 0 Chip	OK	30 degrees C / 86 degrees F
FPC 1 XF 0 TSen	OK	22 degrees C / 71 degrees F
FPC 1 XF 0 Chip	OK	37 degrees C / 98 degrees F
FPC 1 PLX Switch TSen	OK	22 degrees C / 71 degrees F
FPC 1 PLX Switch Chip	OK	22 degrees C / 71 degrees F
FPC 2 Intake	OK	9 degrees C / 48 degrees F



FPC 2 Exhaust A	OK	10 degrees C / 50 degrees F
FPC 2 Exhaust B	OK	10 degrees C / 50 degrees F
FPC 2 LU 0 TSen	OK	26 degrees C / 78 degrees F
FPC 2 LU 0 Chip	OK	25 degrees C / 77 degrees F
FPC 2 LU 1 TSen	OK	26 degrees C / 78 degrees F
FPC 2 LU 1 Chip	OK	26 degrees C / 78 degrees F
FPC 2 LU 2 TSen	OK	26 degrees C / 78 degrees F
FPC 2 LU 2 Chip	OK	17 degrees C / 62 degrees F
FPC 2 LU 3 TSen	OK	26 degrees C / 78 degrees F
FPC 2 LU 3 Chip	OK	22 degrees C / 71 degrees F
FPC 2 XM 0 TSen	OK	26 degrees C / 78 degrees F
FPC 2 XM 0 Chip	OK	34 degrees C / 93 degrees F
FPC 2 XM 1 TSen	OK	26 degrees C / 78 degrees F
FPC 2 XM 1 Chip	OK	26 degrees C / 78 degrees F
FPC 2 PLX Switch TSen	OK	26 degrees C / 78 degrees F
FPC 2 PLX Switch Chip	OK	20 degrees C / 68 degrees F
FPC 3 Intake	OK	12 degrees C / 53 degrees F
FPC 3 Exhaust A	OK	16 degrees C / 60 degrees F
FPC 3 Exhaust B	OK	26 degrees C / 78 degrees F
FPC 3 LU 0 TSen	OK	23 degrees C / 73 degrees F
FPC 3 LU 0 Chip	OK	26 degrees C / 78 degrees F
FPC 3 LU 1 TSen	OK	23 degrees C / 73 degrees F
FPC 3 LU 1 Chip	OK	27 degrees C / 80 degrees F
FPC 3 LU 2 TSen	OK	23 degrees C / 73 degrees F
FPC 3 LU 2 Chip	OK	22 degrees C / 71 degrees F
FPC 3 LU 3 TSen	OK	23 degrees C / 73 degrees F
FPC 3 LU 3 Chip	OK	21 degrees C / 69 degrees F
FPC 3 MQ 0 TSen	OK	15 degrees C / 59 degrees F
FPC 3 MQ 0 Chip	OK	18 degrees C / 64 degrees F
FPC 3 MQ 1 TSen	OK	15 degrees C / 59 degrees F
FPC 3 MQ 1 Chip	OK	20 degrees C / 68 degrees F
FPC 3 MQ 2 TSen	OK	15 degrees C / 59 degrees F
FPC 3 MQ 2 Chip	OK	17 degrees C / 62 degrees F
FPC 3 MQ 3 TSen	OK	15 degrees C / 59 degrees F
FPC 3 MQ 3 Chip	OK	16 degrees C / 60 degrees F
FPC 4 Intake	OK	11 degrees C / 51 degrees F
FPC 4 Exhaust A	OK	22 degrees C / 71 degrees F
FPC 4 Exhaust B	OK	28 degrees C / 82 degrees F
FPC 4 LU 0 TSen	OK	22 degrees C / 71 degrees F
FPC 4 LU 0 Chip	OK	33 degrees C / 91 degrees F
FPC 4 LU 1 TSen	OK	22 degrees C / 71 degrees F
FPC 4 LU 1 Chip	OK	21 degrees C / 69 degrees F
FPC 4 LU 2 TSen	OK	22 degrees C / 71 degrees F
FPC 4 LU 2 Chip	OK	26 degrees C / 78 degrees F
FPC 4 LU 3 TSen	OK	22 degrees C / 71 degrees F
FPC 4 LU 3 Chip	OK	33 degrees C / 91 degrees F
FPC 4 XM 0 TSen	OK	22 degrees C / 71 degrees F
FPC 4 XM 0 Chip	OK	30 degrees C / 86 degrees F
FPC 4 XF 0 TSen	OK	22 degrees C / 71 degrees F
FPC 4 XF 0 Chip	OK	37 degrees C / 98 degrees F
FPC 4 PLX Switch TSen	OK	22 degrees C / 71 degrees F
FPC 4 PLX Switch Chip	OK	23 degrees C / 73 degrees F
FPC 5 Intake	OK	12 degrees C / 53 degrees F
FPC 5 Exhaust A	OK	12 degrees C / 53 degrees F
FPC 5 Exhaust B	OK	12 degrees C / 53 degrees F
FPC 5 LU 0 TSen	OK	27 degrees C / 80 degrees F
FPC 5 LU 0 Chip	OK	28 degrees C / 82 degrees F
FPC 5 LU 1 TSen	OK	27 degrees C / 80 degrees F
FPC 5 LU 1 Chip	OK	27 degrees C / 80 degrees F
FPC 5 LU 2 TSen	OK	27 degrees C / 80 degrees F
FPC 5 LU 2 Chip	OK	19 degrees C / 66 degrees F



FPC 5 LU 3 TSen	OK	27 degrees C / 80 degrees F
FPC 5 LU 3 Chip	OK	22 degrees C / 71 degrees F
FPC 5 XM 0 TSen	OK	27 degrees C / 80 degrees F
FPC 5 XM 0 Chip	OK	36 degrees C / 96 degrees F
FPC 5 XM 1 TSen	OK	27 degrees C / 80 degrees F
FPC 5 XM 1 Chip	OK	26 degrees C / 78 degrees F
FPC 5 PLX Switch TSen	OK	27 degrees C / 80 degrees F
FPC 5 PLX Switch Chip	OK	24 degrees C / 75 degrees F
FPC 6 Intake	OK	12 degrees C / 53 degrees F
FPC 6 Exhaust A	OK	17 degrees C / 62 degrees F
FPC 6 Exhaust B	OK	28 degrees C / 82 degrees F
FPC 6 LU 0 TSen	OK	24 degrees C / 75 degrees F
FPC 6 LU 0 Chip	OK	29 degrees C / 84 degrees F
FPC 6 LU 1 TSen	OK	24 degrees C / 75 degrees F
FPC 6 LU 1 Chip	OK	30 degrees C / 86 degrees F
FPC 6 LU 2 TSen	OK	24 degrees C / 75 degrees F
FPC 6 LU 2 Chip	OK	24 degrees C / 75 degrees F
FPC 6 LU 3 TSen	OK	24 degrees C / 75 degrees F
FPC 6 LU 3 Chip	OK	22 degrees C / 71 degrees F
FPC 6 MQ 0 TSen	OK	16 degrees C / 60 degrees F
FPC 6 MQ 0 Chip	OK	19 degrees C / 66 degrees F
FPC 6 MQ 1 TSen	OK	16 degrees C / 60 degrees F
FPC 6 MQ 1 Chip	OK	20 degrees C / 68 degrees F
FPC 6 MQ 2 TSen	OK	16 degrees C / 60 degrees F
FPC 6 MQ 2 Chip	OK	17 degrees C / 62 degrees F
FPC 6 MQ 3 TSen	OK	16 degrees C / 60 degrees F
FPC 6 MQ 3 Chip	OK	16 degrees C / 60 degrees F
FPC 7 Intake	OK	10 degrees C / 50 degrees F
FPC 7 Exhaust A	OK	10 degrees C / 50 degrees F
FPC 7 Exhaust B	OK	11 degrees C / 51 degrees F
FPC 7 LU 0 TSen	OK	26 degrees C / 78 degrees F
FPC 7 LU 0 Chip	OK	26 degrees C / 78 degrees F
FPC 7 LU 1 TSen	OK	26 degrees C / 78 degrees F
FPC 7 LU 1 Chip	OK	29 degrees C / 84 degrees F
FPC 7 LU 2 TSen	OK	26 degrees C / 78 degrees F
FPC 7 LU 2 Chip	OK	19 degrees C / 66 degrees F
FPC 7 LU 3 TSen	OK	26 degrees C / 78 degrees F
FPC 7 LU 3 Chip	OK	24 degrees C / 75 degrees F
FPC 7 XM 0 TSen	OK	26 degrees C / 78 degrees F
FPC 7 XM 0 Chip	OK	34 degrees C / 93 degrees F
FPC 7 XM 1 TSen	OK	26 degrees C / 78 degrees F
FPC 7 XM 1 Chip	OK	32 degrees C / 89 degrees F
FPC 7 PLX Switch TSen	OK	26 degrees C / 78 degrees F
FPC 7 PLX Switch Chip	OK	22 degrees C / 71 degrees F
FPC 8 Intake	OK	10 degrees C / 50 degrees F
FPC 8 Exhaust A	OK	22 degrees C / 71 degrees F
FPC 8 Exhaust B	OK	28 degrees C / 82 degrees F
FPC 8 LU 0 TSen	OK	20 degrees C / 68 degrees F
FPC 8 LU 0 Chip	OK	33 degrees C / 91 degrees F
FPC 8 LU 1 TSen	OK	20 degrees C / 68 degrees F
FPC 8 LU 1 Chip	OK	23 degrees C / 73 degrees F
FPC 8 LU 2 TSen	OK	20 degrees C / 68 degrees F
FPC 8 LU 2 Chip	OK	26 degrees C / 78 degrees F
FPC 8 LU 3 TSen	OK	20 degrees C / 68 degrees F
FPC 8 LU 3 Chip	OK	33 degrees C / 91 degrees F
FPC 8 XM 0 TSen	OK	20 degrees C / 68 degrees F
FPC 8 XM 0 Chip	OK	29 degrees C / 84 degrees F
FPC 8 XF 0 TSen	OK	20 degrees C / 68 degrees F
FPC 8 XF 0 Chip	OK	38 degrees C / 100 degrees F
FPC 8 PLX Switch TSen	OK	20 degrees C / 68 degrees F
FPC 8 PLX Switch Chip	OK	24 degrees C / 75 degrees F



FPC 9 Intake	OK	11 degrees C / 51 degrees F
FPC 9 Exhaust A	OK	11 degrees C / 51 degrees F
FPC 9 Exhaust B	OK	11 degrees C / 51 degrees F
FPC 9 LU 0 TSen	OK	25 degrees C / 77 degrees F
FPC 9 LU 0 Chip	OK	24 degrees C / 75 degrees F
FPC 9 LU 1 TSen	OK	25 degrees C / 77 degrees F
FPC 9 LU 1 Chip	OK	26 degrees C / 78 degrees F
FPC 9 LU 2 TSen	OK	25 degrees C / 77 degrees F
FPC 9 LU 2 Chip	OK	16 degrees C / 60 degrees F
FPC 9 LU 3 TSen	OK	25 degrees C / 77 degrees F
FPC 9 LU 3 Chip	OK	21 degrees C / 69 degrees F
FPC 9 XM 0 TSen	OK	25 degrees C / 77 degrees F
FPC 9 XM 0 Chip	OK	32 degrees C / 89 degrees F
FPC 9 XM 1 TSen	OK	25 degrees C / 77 degrees F
FPC 9 XM 1 Chip	OK	25 degrees C / 77 degrees F
FPC 9 PLX Switch TSen	OK	25 degrees C / 77 degrees F
FPC 9 PLX Switch Chip	OK	21 degrees C / 69 degrees F
ADC 0 Intake	OK	12 degrees C / 53 degrees F
ADC 0 Exhaust	OK	20 degrees C / 68 degrees F
ADC 0 ADC-XF1	OK	26 degrees C / 78 degrees F
ADC 0 ADC-XF0	OK	32 degrees C / 89 degrees F
ADC 1 Intake	OK	11 degrees C / 51 degrees F
ADC 1 Exhaust	OK	21 degrees C / 69 degrees F
ADC 1 ADC-XF1	OK	24 degrees C / 75 degrees F
ADC 1 ADC-XF0	OK	31 degrees C / 87 degrees F
ADC 2 Intake	OK	14 degrees C / 57 degrees F
ADC 2 Exhaust	OK	21 degrees C / 69 degrees F
ADC 2 ADC-XF1	OK	28 degrees C / 82 degrees F
ADC 2 ADC-XF0	OK	34 degrees C / 93 degrees F
ADC 3 Intake	OK	13 degrees C / 55 degrees F
ADC 3 Exhaust	OK	19 degrees C / 66 degrees F
ADC 3 ADC-XF1	OK	24 degrees C / 75 degrees F
ADC 3 ADC-XF0	OK	31 degrees C / 87 degrees F
ADC 4 Intake	OK	9 degrees C / 48 degrees F
ADC 4 Exhaust	OK	22 degrees C / 71 degrees F
ADC 4 ADC-XF1	OK	28 degrees C / 82 degrees F
ADC 4 ADC-XF0	OK	35 degrees C / 95 degrees F
ADC 5 Intake	OK	12 degrees C / 53 degrees F
ADC 5 Exhaust	OK	22 degrees C / 71 degrees F
ADC 5 ADC-XF1	OK	28 degrees C / 82 degrees F
ADC 5 ADC-XF0	OK	34 degrees C / 93 degrees F
ADC 6 Intake	OK	11 degrees C / 51 degrees F
ADC 6 Exhaust	OK	21 degrees C / 69 degrees F
ADC 6 ADC-XF1	OK	26 degrees C / 78 degrees F
ADC 6 ADC-XF0	OK	35 degrees C / 95 degrees F
ADC 7 Intake	OK	14 degrees C / 57 degrees F
ADC 7 Exhaust	OK	22 degrees C / 71 degrees F
ADC 7 ADC-XF1	OK	26 degrees C / 78 degrees F
ADC 7 ADC-XF0	OK	34 degrees C / 93 degrees F
ADC 8 Intake	OK	14 degrees C / 57 degrees F
ADC 8 Exhaust	OK	21 degrees C / 69 degrees F
ADC 8 ADC-XF1	OK	24 degrees C / 75 degrees F
ADC 8 ADC-XF0	OK	31 degrees C / 87 degrees F
ADC 9 Intake	OK	10 degrees C / 50 degrees F
ADC 9 Exhaust	OK	22 degrees C / 71 degrees F
ADC 9 ADC-XF1	OK	28 degrees C / 82 degrees F
ADC 9 ADC-XF0	OK	36 degrees C / 96 degrees F
Fans Fan Tray 0 Fan 1	OK	3480 RPM
Fan Tray 0 Fan 2	OK	3480 RPM
Fan Tray 0 Fan 3	OK	3480 RPM
Fan Tray 0 Fan 4	OK	3360 RPM



Fan Tray 0 Fan 5	OK	3360 RPM
Fan Tray 0 Fan 6	OK	3480 RPM
Fan Tray 1 Fan 1	OK	3360 RPM
Fan Tray 1 Fan 2	OK	3360 RPM
Fan Tray 1 Fan 3	OK	3360 RPM
Fan Tray 1 Fan 4	OK	3480 RPM
Fan Tray 1 Fan 5	OK	3480 RPM
Fan Tray 1 Fan 6	OK	3480 RPM
Fan Tray 2 Fan 1	OK	3360 RPM
Fan Tray 2 Fan 2	OK	3360 RPM
Fan Tray 2 Fan 3	OK	3480 RPM
Fan Tray 2 Fan 4	OK	3480 RPM
Fan Tray 2 Fan 5	OK	3360 RPM
Fan Tray 2 Fan 6	OK	3480 RPM
Fan Tray 3 Fan 1	OK	3360 RPM
Fan Tray 3 Fan 2	OK	3360 RPM
Fan Tray 3 Fan 3	OK	3480 RPM
Fan Tray 3 Fan 4	OK	3480 RPM
Fan Tray 3 Fan 5	OK	3480 RPM
Fan Tray 3 Fan 6	OK	3360 RPM

### show chassis environment (T320 Router)

```
user@host> show chassis environment
```

Class	Item	Status	Measurement
Power	PEM 0	OK	
	PEM 1	Absent	
Temp	SCG 0	OK	28 degrees C / 82 degrees F
	SCG 1	OK	28 degrees C / 82 degrees F
	Routing Engine 0	OK	31 degrees C / 87 degrees F
	Routing Engine 1	OK	30 degrees C / 86 degrees F
	CB 0	OK	32 degrees C / 89 degrees F
	CB 1	OK	32 degrees C / 89 degrees F
	SIB 0	OK	33 degrees C / 91 degrees F
	SIB 1	OK	33 degrees C / 91 degrees F
	SIB 2	OK	34 degrees C / 93 degrees F
	FPC 0 Top	OK	38 degrees C / 100 degrees F
	FPC 0 Bottom	OK	32 degrees C / 89 degrees F
	FPC 1 Top	OK	38 degrees C / 100 degrees F
	FPC 1 Bottom	OK	33 degrees C / 91 degrees F
	FPC 2 Top	OK	36 degrees C / 96 degrees F
	FPC 2 Bottom	OK	31 degrees C / 87 degrees F
	FPM GBUS	OK	26 degrees C / 78 degrees F
	FPM Display	OK	29 degrees C / 84 degrees F
Fans	Top Left Front fan	OK	Spinning at normal speed
	Top Left Middle fan	OK	Spinning at normal speed
	Top Left Rear fan	OK	Spinning at normal speed
	Top Right Front fan	OK	Spinning at normal speed
	Top Right Middle fan	OK	Spinning at normal speed
	Top Right Rear fan	OK	Spinning at normal speed
	Bottom Left Front fan	OK	Spinning at normal speed
	Bottom Left Middle fan	OK	Spinning at normal speed
	Bottom Left Rear fan	OK	Spinning at normal speed
	Bottom Right Front fan	OK	Spinning at normal speed
	Bottom Right Middle fan	OK	Spinning at normal speed
	Bottom Right Rear fan	OK	Spinning at normal speed
	Rear Tray Top fan	OK	Spinning at normal speed
	Rear Tray Second fan	OK	Spinning at normal speed
	Rear Tray Middle fan	OK	Spinning at normal speed
	Rear Tray Fourth fan	OK	Spinning at normal speed
	Rear Tray Bottom fan	OK	Spinning at normal speed
Misc	CIP	OK	
	SPMB 0	OK	



SPMB 1 OK

#### show chassis environment (T640 Router)

```
user@host> show chassis environment
```

Class	Item	Status	Measurement
Temp	PEM 0	Absent	
	PEM 1	OK	22 degrees C / 71 degrees F
	SCG 0	OK	30 degrees C / 86 degrees F
	SCG 1	OK	30 degrees C / 86 degrees F
	Routing Engine 0	Present	
	Routing Engine 1	OK	27 degrees C / 80 degrees F
	CB 0	Present	
	CB 1	OK	33 degrees C / 91 degrees F
	SIB 0	Absent	
	SIB 1	Absent	
	SIB 2	Absent	
	SIB 3	Absent	
	SIB 4	Absent	
	FPC 4 Top	Testing	
	FPC 4 Bottom	Testing	
	FPC 5 Top	Testing	
	FPC 5 Bottom	Testing	
	FPC 6 Top	Testing	
	FPC 6 Bottom	Testing	
Fans	FPM GBUS	OK	23 degrees C / 73 degrees F
	FPM Display	Absent	
	Top Left Front fan	OK	Spinning at normal speed
	Top Left Middle fan	OK	Spinning at normal speed
	Top Left Rear fan	OK	Spinning at normal speed
	Top Right Front fan	OK	Spinning at normal speed
	Top Right Middle fan	OK	Spinning at normal speed
	Top Right Rear fan	OK	Spinning at normal speed
	Bottom Left Front fan	OK	Spinning at normal speed
	Bottom Left Middle fan	OK	Spinning at normal speed
	Bottom Left Rear fan	OK	Spinning at normal speed
	Bottom Right Front fan	OK	Spinning at normal speed
	Bottom Right Middle fan	OK	Spinning at normal speed
	Bottom Right Rear fan	OK	Spinning at normal speed
	Fourth Blower from top	OK	Spinning at normal speed
	Bottom Blower	OK	Spinning at normal speed
	Middle Blower	OK	Spinning at normal speed
	Top Blower	OK	Spinning at normal speed
	Second Blower from top	OK	Spinning at normal speed
Misc	CIP	OK	
	SPMB 0	OK	
	SPMB 1	OK	

#### show chassis environment (T4000 Router)

```
user@host> show chassis environment
```

Class	Item	Status	Measurement
Temp	PEM 0	OK	33 degrees C / 91 degrees F
	PEM 1	Absent	
	SCG 0	OK	33 degrees C / 91 degrees F
	SCG 1	OK	33 degrees C / 91 degrees F
	Routing Engine 0	OK	33 degrees C / 91 degrees F
	Routing Engine 0 CPU	OK	50 degrees C / 122 degrees F
	Routing Engine 1	OK	32 degrees C / 89 degrees F
	Routing Engine 1 CPU	OK	46 degrees C / 114 degrees F
	CB 0	OK	32 degrees C / 89 degrees F
	CB 1	OK	33 degrees C / 91 degrees F



SIB 0	OK	42 degrees C / 107 degrees F
SIB 1	OK	42 degrees C / 107 degrees F
SIB 2	OK	42 degrees C / 107 degrees F
SIB 3	OK	43 degrees C / 109 degrees F
SIB 4	OK	45 degrees C / 113 degrees F
FPC 0 Fan Intake	OK	34 degrees C / 93 degrees F
FPC 0 Fan Exhaust	OK	48 degrees C / 118 degrees F
FPC 0 PMB	OK	47 degrees C / 116 degrees F
FPC 0 LMB0	OK	50 degrees C / 122 degrees F
FPC 0 LMB1	OK	41 degrees C / 105 degrees F
FPC 0 LMB2	OK	35 degrees C / 95 degrees F
FPC 0 PFE1 LU2	OK	46 degrees C / 114 degrees F
FPC 0 PFE1 LU0	OK	41 degrees C / 105 degrees F
FPC 0 PFE0 LU0	OK	57 degrees C / 134 degrees F
FPC 0 XF1	OK	46 degrees C / 114 degrees F
FPC 0 XF0	OK	52 degrees C / 125 degrees F
FPC 0 XM1	OK	41 degrees C / 105 degrees F
FPC 0 XM0	OK	50 degrees C / 122 degrees F
FPC 0 PFE0 LU1	OK	56 degrees C / 132 degrees F
FPC 0 PFE0 LU2	OK	45 degrees C / 113 degrees F
FPC 0 PFE1 LU1	OK	37 degrees C / 98 degrees F
FPC 3 Fan Intake	OK	36 degrees C / 96 degrees F
FPC 3 Fan Exhaust	OK	51 degrees C / 123 degrees F
FPC 3 PMB	OK	43 degrees C / 109 degrees F
FPC 3 LMB0	OK	57 degrees C / 134 degrees F
FPC 3 LMB1	OK	54 degrees C / 129 degrees F
FPC 3 LMB2	OK	38 degrees C / 100 degrees F
FPC 3 PFE1 LU2	OK	63 degrees C / 145 degrees F
FPC 3 PFE1 LU0	OK	45 degrees C / 113 degrees F
FPC 3 PFE0 LU0	OK	69 degrees C / 156 degrees F
FPC 3 XF1	OK	62 degrees C / 143 degrees F
FPC 3 XF0	OK	63 degrees C / 145 degrees F
FPC 3 XM1	OK	43 degrees C / 109 degrees F
FPC 3 XM0	OK	67 degrees C / 152 degrees F
FPC 3 PFE0 LU1	OK	63 degrees C / 145 degrees F
FPC 3 PFE0 LU2	OK	66 degrees C / 150 degrees F
FPC 3 PFE1 LU1	OK	41 degrees C / 105 degrees F
FPC 5 Top	OK	39 degrees C / 102 degrees F
FPC 5 Bottom	OK	38 degrees C / 100 degrees F
FPC 6 Fan Intake	OK	33 degrees C / 91 degrees F
FPC 6 Fan Exhaust	OK	49 degrees C / 120 degrees F
FPC 6 PMB	OK	40 degrees C / 104 degrees F
FPC 6 LMB0	OK	60 degrees C / 140 degrees F
FPC 6 LMB1	OK	58 degrees C / 136 degrees F
FPC 6 LMB2	OK	40 degrees C / 104 degrees F
FPC 6 PFE1 LU2	OK	69 degrees C / 156 degrees F
FPC 6 PFE1 LU0	OK	45 degrees C / 113 degrees F
FPC 6 PFE0 LU0	OK	71 degrees C / 159 degrees F
FPC 6 XF1	OK	58 degrees C / 136 degrees F
FPC 6 XF0	OK	65 degrees C / 149 degrees F
FPC 6 XM1	OK	39 degrees C / 102 degrees F
FPC 6 XM0	OK	66 degrees C / 150 degrees F
FPC 6 PFE0 LU1	OK	69 degrees C / 156 degrees F
FPC 6 PFE0 LU2	OK	69 degrees C / 156 degrees F
FPC 6 PFE1 LU1	OK	42 degrees C / 107 degrees F
FPM GBUS	OK	24 degrees C / 75 degrees F
FPM Display	OK	27 degrees C / 80 degrees F
Fans Top Left Front fan	OK	Spinning at high speed
Top Left Middle fan	OK	Spinning at high speed
Top Left Rear fan	OK	Spinning at high speed
Top Right Front fan	OK	Spinning at high speed



	Top Right Middle fan	OK	Spinning at high speed
	Top Right Rear fan	OK	Spinning at high speed
	Bottom Left Front fan	OK	Spinning at high speed
	Bottom Left Middle fan	OK	Spinning at high speed
	Bottom Left Rear fan	OK	Spinning at high speed
	Bottom Right Front fan	OK	Spinning at high speed
	Bottom Right Middle fan	OK	Spinning at high speed
	Bottom Right Rear fan	OK	Spinning at high speed
	Rear Tray Top fan	OK	Spinning at high speed
	Rear Tray Second fan	OK	Spinning at high speed
	Rear Tray Third fan	OK	Spinning at high speed
	Rear Tray Fourth fan	OK	Spinning at high speed
	Rear Tray Fifth fan	OK	Spinning at high speed
	Rear Tray Sixth fan	OK	Spinning at high speed
	Rear Tray Seventh fan	OK	Spinning at high speed
	Rear Tray Bottom fan	OK	Spinning at high speed
Misc	CIP	OK	
	SPMB 0	OK	
	SPMB 1	OK	

### show chassis environment (TX Matrix Router)

```
user@host> show chassis environment
scc-re0:
```

```
-----
Class Item                Status      Measurement
Temp  PEM 0                 Absent
      PEM 1                 OK          29 degrees C / 84 degrees F
      Routing Engine 0      OK          34 degrees C / 93 degrees F
      Routing Engine 1      OK          34 degrees C / 93 degrees F
      CB 0                   OK          32 degrees C / 89 degrees F
      CB 1                   OK          32 degrees C / 89 degrees F
      SIB 0                  OK          44 degrees C / 111 degrees F
      SIB 0 (B)              OK          44 degrees C / 111 degrees F
      FPM GBUS               OK          27 degrees C / 80 degrees F
      FPM Display            OK          32 degrees C / 89 degrees F
Fans  Top Left Front fan    OK          Spinning at normal speed
      Top Left Middle fan   OK          Spinning at normal speed
      Top Left Rear fan     OK          Spinning at normal speed
      Top Right Front fan   OK          Spinning at normal speed
      Top Right Middle fan  OK          Spinning at normal speed
      Top Right Rear fan    OK          Spinning at normal speed
      Bottom Left Front fan OK          Spinning at normal speed
      Bottom Left Middle fan OK          Spinning at normal speed
      Bottom Left Rear fan  OK          Spinning at normal speed
      Bottom Right Front fan OK          Spinning at normal speed
      Bottom Right Middle fan OK          Spinning at normal speed
      Bottom Right Rear fan OK          Spinning at normal speed
      Rear Tray Top fan     OK          Spinning at normal speed
      Rear Tray Second fan  OK          Spinning at normal speed
      Rear Tray Third fan   OK          Spinning at normal speed
      Rear Tray Fourth fan  OK          Spinning at normal speed
      Rear Tray Fifth fan   OK          Spinning at normal speed
      Rear Tray Sixth fan   OK          Spinning at normal speed
      Rear Tray Seventh fan OK          Spinning at normal speed
      Rear Tray Bottom fan  OK          Spinning at normal speed
Misc  CIP 0                  OK
      CIP 1                  OK
      SPMB 0                  OK
      SPMB 1                  OK
```

```
lcc0-re0:
-----
```



Class	Item	Status	Measurement
Temp	PEM 0	OK	29 degrees C / 84 degrees F
	PEM 1	Absent	
	SCG 0	OK	35 degrees C / 95 degrees F
	SCG 1	Absent	
	Routing Engine 0	OK	39 degrees C / 102 degrees F
	Routing Engine 1	OK	36 degrees C / 96 degrees F
	CB 0	OK	32 degrees C / 89 degrees F
	CB 1	OK	32 degrees C / 89 degrees F
	SIB 0	OK	40 degrees C / 104 degrees F
	SIB 0 (B)	OK	51 degrees C / 123 degrees F
	FPC 0 Top	OK	45 degrees C / 113 degrees F
	FPC 0 Bottom	OK	31 degrees C / 87 degrees F
	FPC 1 Top	OK	34 degrees C / 93 degrees F
	FPC 1 Bottom	OK	31 degrees C / 87 degrees F
	FPM GBUS	OK	30 degrees C / 86 degrees F
	FPM Display	OK	34 degrees C / 93 degrees F
Fans	Top Left Front fan	OK	Spinning at normal speed
	Top Left Middle fan	OK	Spinning at normal speed
	Top Left Rear fan	OK	Spinning at normal speed
	Top Right Front fan	OK	Spinning at normal speed
	Top Right Middle fan	OK	Spinning at normal speed
	Top Right Rear fan	OK	Spinning at normal speed
	Bottom Left Front fan	OK	Spinning at normal speed
	Bottom Left Middle fan	OK	Spinning at normal speed
	Bottom Left Rear fan	OK	Spinning at normal speed
	Bottom Right Front fan	OK	Spinning at normal speed
	Bottom Right Middle fan	OK	Spinning at normal speed
	Bottom Right Rear fan	OK	Spinning at normal speed
	Rear Tray Top fan	OK	Spinning at normal speed
	Rear Tray Second fan	OK	Spinning at normal speed
	Rear Tray Third fan	OK	Spinning at normal speed
	Rear Tray Fourth fan	OK	Spinning at normal speed
	Rear Tray Fifth fan	OK	Spinning at normal speed
	Rear Tray Sixth fan	OK	Spinning at normal speed
	Rear Tray Seventh fan	OK	Spinning at normal speed
	Rear Tray Bottom fan	OK	Spinning at normal speed
Misc	CIP	OK	
	SPMB 0	OK	
	SPMB 1	OK	

lcc2-re0:

Class	Item	Status	Measurement
Temp	PEM 0	OK	29 degrees C / 84 degrees F
	PEM 1	Absent	
	SCG 0	OK	32 degrees C / 89 degrees F
	SCG 1	Absent	
	Routing Engine 0	OK	31 degrees C / 87 degrees F
	Routing Engine 1	OK	32 degrees C / 89 degrees F
	CB 0	OK	30 degrees C / 86 degrees F
	SIB 0	OK	38 degrees C / 100 degrees F
	SIB 0 (B)	OK	49 degrees C / 120 degrees F
	FPC 0 Top	OK	45 degrees C / 113 degrees F
	FPC 0 Bottom	OK	33 degrees C / 91 degrees F
	FPC 1 Top	OK	37 degrees C / 98 degrees F
	FPC 1 Bottom	OK	33 degrees C / 91 degrees F
	FPM GBUS	OK	30 degrees C / 86 degrees F
	FPM Display	OK	34 degrees C / 93 degrees F
Fans	Top Left Front fan	OK	Spinning at normal speed
	Top Left Middle fan	OK	Spinning at normal speed



...

### show chassis environment (T1600 Router)

```

user@host> show chassis environment
Class Item                               Status Measurement
Temp PEM 0                             OK          27 degrees C / 80 degrees F
      PEM 1                             Absent
      SCG 0                             OK          31 degrees C / 87 degrees F
      SCG 1                             OK          35 degrees C / 95 degrees F
      Routing Engine 0                   OK          30 degrees C / 86 degrees F
      Routing Engine 1                   OK          30 degrees C / 86 degrees F
      CB 0                               OK          31 degrees C / 87 degrees F
      CB 1                               OK          31 degrees C / 87 degrees F
      SIB 0                              OK          41 degrees C / 105 degrees F
      SIB 0 (B)                          OK          34 degrees C / 93 degrees F
      SIB 1                              OK          0 degrees C / 32 degrees F
      SIB 1 (B)                          OK          0 degrees C / 32 degrees F
      SIB 2                              OK          0 degrees C / 32 degrees F
      SIB 2 (B)                          OK          0 degrees C / 32 degrees F
      SIB 3                              OK          0 degrees C / 32 degrees F
      SIB 3 (B)                          OK          0 degrees C / 32 degrees F
      SIB 4                              OK          0 degrees C / 32 degrees F
      SIB 4 (B)                          OK          0 degrees C / 32 degrees F
      FPC 0 Top                          OK          49 degrees C / 120 degrees F
      FPC 0 Bottom                       OK          50 degrees C / 122 degrees F
      FPC 1 Top                          OK          48 degrees C / 118 degrees F
      FPC 1 Bottom                       OK          49 degrees C / 120 degrees F
      FPM GBUS                           OK          27 degrees C / 80 degrees F
      FPM Display                        OK          30 degrees C / 86 degrees F
Fans  Top Left Front fan                 OK          Spinning at normal speed
      Top Left Middle fan                OK          Spinning at normal speed
      Top Left Rear fan                  OK          Spinning at normal speed
      Top Right Front fan                OK          Spinning at normal speed
      Top Right Middle fan               OK          Spinning at normal speed
      Top Right Rear fan                 OK          Spinning at normal speed
      Bottom Left Front fan              OK          Spinning at normal speed
      Bottom Left Middle fan             OK          Spinning at normal speed
      Bottom Left Rear fan               OK          Spinning at normal speed
      Bottom Right Front fan             OK          Spinning at normal speed
      Bottom Right Middle fan            OK          Spinning at normal speed
      Bottom Right Rear fan              OK          Spinning at normal speed
      Rear Tray Top fan                  OK          Spinning at normal speed
      Rear Tray Second fan               OK          Spinning at normal speed
      Rear Tray Third fan                OK          Spinning at normal speed
      Rear Tray Fourth fan               OK          Spinning at normal speed
      Rear Tray Fifth fan                OK          Spinning at normal speed
      Rear Tray Sixth fan                OK          Spinning at normal speed
      Rear Tray Seventh fan              OK          Spinning at normal speed
      Rear Tray Bottom fan               OK          Spinning at normal speed
Misc  CIP                               OK
      SPMB 0                             OK
      SPMB 1                             OK

```

### show chassis environment (TX Matrix Plus Router)

```

user@host> show chassis environment
sfc0-re0:
-----
Class Item                               Status Measurement
Temp PEM 0                             OK          28 degrees C / 82 degrees F
      PEM 1                             Absent
      Routing Engine 0                   OK          27 degrees C / 80 degrees F
      Routing Engine 1                   OK          29 degrees C / 84 degrees F

```



	CB 0 Intake	OK	26 degrees C / 78 degrees F
	CB 0 Exhaust A	OK	25 degrees C / 77 degrees F
	CB 0 Exhaust B	OK	25 degrees C / 77 degrees F
	CB 1 Intake	OK	26 degrees C / 78 degrees F
	CB 1 Exhaust A	OK	26 degrees C / 78 degrees F
	CB 1 Exhaust B	OK	26 degrees C / 78 degrees F
	SIB F13 0	OK	47 degrees C / 116 degrees F
	SIB F13 0 (B)	OK	48 degrees C / 118 degrees F
	SIB F13 1	OK	38 degrees C / 100 degrees F
	SIB F13 1 (B)	OK	37 degrees C / 98 degrees F
	SIB F2S 0/0	OK	27 degrees C / 80 degrees F
	SIB F2S 0/2	OK	28 degrees C / 82 degrees F
	SIB F2S 0/4	OK	27 degrees C / 80 degrees F
	SIB F2S 0/6	OK	28 degrees C / 82 degrees F
	SIB F2S 1/0	OK	26 degrees C / 78 degrees F
	SIB F2S 1/2	OK	26 degrees C / 78 degrees F
	SIB F2S 1/4	OK	26 degrees C / 78 degrees F
	SIB F2S 1/6	OK	26 degrees C / 78 degrees F
	SIB F2S 2/0	OK	25 degrees C / 77 degrees F
	SIB F2S 2/2	OK	25 degrees C / 77 degrees F
	SIB F2S 2/4	OK	23 degrees C / 73 degrees F
	CIP 0 Intake	OK	23 degrees C / 73 degrees F
	CIP 0 Exhaust A	OK	24 degrees C / 75 degrees F
	CIP 0 Exhaust B	OK	24 degrees C / 75 degrees F
	CIP 1 Intake	OK	24 degrees C / 75 degrees F
	CIP 1 Exhaust A	OK	25 degrees C / 77 degrees F
	CIP 1 Exhaust B	OK	25 degrees C / 77 degrees F
Fans	Fan Tray 0 Fan 1	OK	Spinning at normal speed
	Fan Tray 0 Fan 2	OK	Spinning at normal speed
	Fan Tray 0 Fan 3	OK	Spinning at normal speed
	Fan Tray 0 Fan 4	OK	Spinning at normal speed
	Fan Tray 0 Fan 5	OK	Spinning at normal speed
	Fan Tray 0 Fan 6	OK	Spinning at normal speed
	Fan Tray 1 Fan 1	OK	Spinning at normal speed
	Fan Tray 1 Fan 2	OK	Spinning at normal speed
	Fan Tray 1 Fan 3	OK	Spinning at normal speed
	Fan Tray 1 Fan 4	OK	Spinning at normal speed
	Fan Tray 1 Fan 5	OK	Spinning at normal speed
	Fan Tray 1 Fan 6	OK	Spinning at normal speed
	Fan Tray 2 Fan 1	OK	Spinning at normal speed
	Fan Tray 2 Fan 2	OK	Spinning at normal speed
	Fan Tray 2 Fan 3	OK	Spinning at normal speed
	Fan Tray 2 Fan 4	OK	Spinning at normal speed
	Fan Tray 2 Fan 5	OK	Spinning at normal speed
	Fan Tray 2 Fan 6	OK	Spinning at normal speed
	Fan Tray 2 Fan 7	OK	Spinning at normal speed
	Fan Tray 2 Fan 8	OK	Spinning at normal speed
	Fan Tray 2 Fan 9	OK	Spinning at normal speed
	Fan Tray 3 Fan 1	OK	Spinning at normal speed
	Fan Tray 3 Fan 2	OK	Spinning at normal speed
	Fan Tray 3 Fan 3	OK	Spinning at normal speed
	Fan Tray 3 Fan 4	OK	Spinning at normal speed
	Fan Tray 3 Fan 5	OK	Spinning at normal speed
	Fan Tray 3 Fan 6	OK	Spinning at normal speed
	Fan Tray 3 Fan 7	OK	Spinning at normal speed
	Fan Tray 3 Fan 8	OK	Spinning at normal speed
	Fan Tray 3 Fan 9	OK	Spinning at normal speed
	Fan Tray 4 Fan 1	OK	Spinning at normal speed
	Fan Tray 4 Fan 2	OK	Spinning at normal speed
	Fan Tray 4 Fan 3	OK	Spinning at normal speed
	Fan Tray 4 Fan 4	OK	Spinning at normal speed



Fan Tray 4 Fan 5	OK	Spinning at normal speed
Fan Tray 4 Fan 6	OK	Spinning at normal speed
Fan Tray 4 Fan 7	OK	Spinning at normal speed
Fan Tray 4 Fan 8	OK	Spinning at normal speed
Fan Tray 4 Fan 9	OK	Spinning at normal speed
Fan Tray 5 Fan 1	OK	Spinning at normal speed
Fan Tray 5 Fan 2	OK	Spinning at normal speed
Fan Tray 5 Fan 3	OK	Spinning at normal speed
Fan Tray 5 Fan 4	OK	Spinning at normal speed
Fan Tray 5 Fan 5	OK	Spinning at normal speed
Fan Tray 5 Fan 6	OK	Spinning at normal speed
Fan Tray 5 Fan 7	OK	Spinning at normal speed
Fan Tray 5 Fan 8	OK	Spinning at normal speed
Fan Tray 5 Fan 9	OK	Spinning at normal speed
Misc SPMB 0	OK	
SPMB 1	OK	

lcc0-re0:

Class	Item	Status	Measurement
Temp	PEM 0	OK	27 degrees C / 80 degrees F
	PEM 1	Absent	
	SCG 0	OK	31 degrees C / 87 degrees F
	SCG 1	OK	35 degrees C / 95 degrees F
	Routing Engine 0	OK	30 degrees C / 86 degrees F
	Routing Engine 1	OK	30 degrees C / 86 degrees F
	CB 0	OK	31 degrees C / 87 degrees F
	CB 1	OK	31 degrees C / 87 degrees F
	SIB 0	OK	41 degrees C / 105 degrees F
	SIB 0 (B)	OK	34 degrees C / 93 degrees F
	SIB 1	OK	0 degrees C / 32 degrees F
	SIB 1 (B)	OK	0 degrees C / 32 degrees F
	SIB 2	OK	0 degrees C / 32 degrees F
	SIB 2 (B)	OK	0 degrees C / 32 degrees F
	SIB 3	OK	0 degrees C / 32 degrees F
	SIB 3 (B)	OK	0 degrees C / 32 degrees F
	SIB 4	OK	0 degrees C / 32 degrees F
	SIB 4 (B)	OK	0 degrees C / 32 degrees F
	FPC 0 Top	OK	49 degrees C / 120 degrees F
	FPC 0 Bottom	OK	50 degrees C / 122 degrees F
	FPC 1 Top	OK	48 degrees C / 118 degrees F
	FPC 1 Bottom	OK	49 degrees C / 120 degrees F
	FPM GBUS	OK	27 degrees C / 80 degrees F
	FPM Display	OK	30 degrees C / 86 degrees F
Fans	Top Left Front fan	OK	Spinning at normal speed
	Top Left Middle fan	OK	Spinning at normal speed
	Top Left Rear fan	OK	Spinning at normal speed
	Top Right Front fan	OK	Spinning at normal speed
	Top Right Middle fan	OK	Spinning at normal speed
	Top Right Rear fan	OK	Spinning at normal speed
	Bottom Left Front fan	OK	Spinning at normal speed
	Bottom Left Middle fan	OK	Spinning at normal speed
	Bottom Left Rear fan	OK	Spinning at normal speed
	Bottom Right Front fan	OK	Spinning at normal speed
	Bottom Right Middle fan	OK	Spinning at normal speed
	Bottom Right Rear fan	OK	Spinning at normal speed
	Rear Tray Top fan	OK	Spinning at normal speed
	Rear Tray Second fan	OK	Spinning at normal speed
	Rear Tray Third fan	OK	Spinning at normal speed
	Rear Tray Fourth fan	OK	Spinning at normal speed
	Rear Tray Fifth fan	OK	Spinning at normal speed



	Rear Tray Sixth fan	OK	Spinning at normal speed
	Rear Tray Seventh fan	OK	Spinning at normal speed
	Rear Tray Bottom fan	OK	Spinning at normal speed
Misc	CIP	OK	
	SPMB 0	OK	
	SPMB 1	OK	

#### show chassis environment (EX4200 Standalone Switch)

```
user@switch> show chassis environment
```

Class	Item	Status	Measurement
Power	FPC 0 Power Supply 0	OK	
	FPC 0 Power Supply 1	Absent	
Temp	FPC 0 CPU	OK	41 degrees C / 105 degrees F
	FPC 0 EX-PFE1	OK	42 degrees C / 107 degrees F
	FPC 0 EX-PFE2	OK	46 degrees C / 114 degrees F
	FPC 0 GEPHY Front Left	OK	25 degrees C / 77 degrees F
	FPC 0 GEPHY Front Right	OK	27 degrees C / 80 degrees F
	FPC 0 Uplink Conn	OK	29 degrees C / 84 degrees F
Fans	FPC 0 Fan 1	OK	Spinning at normal speed
	FPC 0 Fan 2	OK	Spinning at normal speed
	FPC 0 Fan 3	OK	Spinning at normal speed

#### show chassis environment (EX8216 Switch)

```
user@switch> show chassis environment
```

Class	Item	Status	Measurement
Power	PSU 0	OK	
	PSU 1	OK	
	PSU 2	OK	
	PSU 3	Check	
	PSU 4	Absent	
	PSU 5	Absent	
Temp	CB 0 Intake	OK	23 degrees C / 73 degrees F
	CB 0 Exhaust	OK	26 degrees C / 78 degrees F
	CB 1 Intake	OK	22 degrees C / 71 degrees F
	CB 1 Exhaust	OK	25 degrees C / 77 degrees F
	FPC 4 Intake	OK	49 degrees C / 120 degrees F
	FPC 4 Exhaust	OK	59 degrees C / 138 degrees F
	SIB 5 Intake	OK	25 degrees C / 77 degrees F
	SIB 5 Exhaust	OK	35 degrees C / 95 degrees F
	SIB 6 Intake	OK	25 degrees C / 77 degrees F
	SIB 6 Exhaust	OK	38 degrees C / 100 degrees F
Fans	Top Fan 1	OK	Spinning at normal speed
	Top Fan 2	OK	Spinning at normal speed
	Top Fan 3	OK	Spinning at normal speed
	Top Fan 4	OK	Spinning at normal speed
	Top Fan 5	OK	Spinning at normal speed
	Top Fan 6	OK	Spinning at normal speed
	Top Fan 7	OK	Spinning at normal speed
	Top Fan 8	OK	Spinning at normal speed
	Top Fan 9	OK	Spinning at normal speed
	Bottom Fan 1	OK	Spinning at normal speed
	Bottom Fan 2	OK	Spinning at normal speed
	Bottom Fan 3	OK	Spinning at normal speed
	Bottom Fan 4	OK	Spinning at normal speed
	Bottom Fan 5	OK	Spinning at normal speed
	Bottom Fan 6	OK	Spinning at normal speed
	Bottom Fan 7	OK	Spinning at normal speed
	Bottom Fan 8	OK	Spinning at normal speed
	Bottom Fan 9	OK	Spinning at normal speed

```
user@switch> show chassis environment
```



**show chassis  
environment (QFX  
Series)**

Class	Item	Status	Measurement
Power	FPC 0 Power Supply 0	OK	
	FPC 0 Power Supply 1	OK	
Temp	FPC 0 Sensor TopLeft I	OK	26 degrees C / 78 degrees F
	FPC 0 Sensor TopRight I	OK	24 degrees C / 75 degrees F
	FPC 0 Sensor TopLeft E	OK	30 degrees C / 86 degrees F
	FPC 0 Sensor TopRight E	OK	30 degrees C / 86 degrees F
	FPC 0 Sensor TopMiddle I	OK	30 degrees C / 86 degrees F
	FPC 0 Sensor TopMiddle E	OK	38 degrees C / 100 degrees F
	FPC 0 Sensor Bottom I	OK	34 degrees C / 93 degrees F
	FPC 0 Sensor Bottom E	OK	38 degrees C / 100 degrees F
	FPC 0 Sensor Die Temp	OK	38 degrees C / 100 degrees F
	FPC 0 Sensor Mgmt Brd I	OK	24 degrees C / 75 degrees F
	FPC 0 Sensor Switch I	OK	28 degrees C / 82 degrees F
Fans	FPC 0 Fan 1 (left)	Failed	
	FPC 0 Fan 2 (right)	OK	Spinning at normal speed
	FPC 0 Fan 3 (middle)	OK	Spinning at normal speed

**show chassis  
environment**

```
user@switch> show chassis environment interconnect-device IC-A0004
Class Item                Status  Measurement
CB 0
```



interconnect-device  
(QFabric System)

CB 0 L Intake	OK	30 degrees C / 86 degrees F
CB 0 R Intake	OK	31 degrees C / 87 degrees F
CB 0 L Exhaust	OK	32 degrees C / 89 degrees F
CB 0 R Exhaust	OK	33 degrees C / 91 degrees F
Routing Engine 0 CPU temp	OK	51 degrees C / 123 degrees F
CB 1		
CB 1 L Intake	OK	27 degrees C / 80 degrees F
CB 1 R Intake	OK	29 degrees C / 84 degrees F
CB 1 L Exhaust	OK	31 degrees C / 87 degrees F
CB 1 R Exhaust	OK	32 degrees C / 89 degrees F
Routing Engine 1 CPU temp	OK	40 degrees C / 104 degrees F
FC 0 FPC 0		
FPC 0 L Intake	OK	25 degrees C / 77 degrees F
FPC 0 R Intake	OK	28 degrees C / 82 degrees F
FPC 0 L Exhaust	OK	28 degrees C / 82 degrees F
FPC 0 R Exhaust	OK	29 degrees C / 84 degrees F
FC 7 FPC 7		
FPC 7 L Intake	OK	25 degrees C / 77 degrees F
FPC 7 R Intake	OK	26 degrees C / 78 degrees F
FPC 7 L Exhaust	OK	28 degrees C / 82 degrees F
FPC 7 R Exhaust	OK	29 degrees C / 84 degrees F
RC 0 FPC 8		
FPC 8 L Intake	OK	25 degrees C / 77 degrees F
FPC 8 R Intake	OK	26 degrees C / 78 degrees F
FPC 8 L Exhaust	OK	32 degrees C / 89 degrees F
FPC 8 R Exhaust	OK	30 degrees C / 86 degrees F
RC 7 FPC 15		
FPC 15 L Intake	OK	24 degrees C / 75 degrees F
FPC 15 R Intake	OK	25 degrees C / 77 degrees F
FPC 15 L Exhaust	OK	33 degrees C / 91 degrees F
FPC 15 R Exhaust	OK	31 degrees C / 87 degrees F
Fans TFT 0 Fan 0	OK	Spinning at normal speed
Fans TFT 0 Fan 1	OK	Spinning at normal speed
Fans TFT 0 Fan 2	OK	Spinning at normal speed
Fans TFT 0 Fan 3	OK	Spinning at normal speed
Fans TFT 0 Fan 4	OK	Spinning at normal speed
Fans TFT 0 Fan 5	OK	Spinning at normal speed
Fans BFT 1 Fan 0	OK	Spinning at normal speed
Fans BFT 1 Fan 1	OK	Spinning at normal speed
Fans BFT 1 Fan 2	OK	Spinning at normal speed
Fans BFT 1 Fan 3	Check	
Fans BFT 1 Fan 4	OK	Spinning at normal speed
Fans BFT 1 Fan 5	OK	Spinning at normal speed
Fans SFT 0 Fan 0 Rotor 0	OK	Spinning at normal speed
Fans SFT 0 Fan 0 Rotor 1	OK	Spinning at normal speed
Fans SFT 0 Fan 1 Rotor 0	OK	Spinning at normal speed
Fans SFT 0 Fan 1 Rotor 1	OK	Spinning at normal speed
Fans SFT 0 Fan 2 Rotor 0	OK	Spinning at normal speed
Fans SFT 0 Fan 2 Rotor 1	OK	Spinning at normal speed
Fans SFT 0 Fan 3 Rotor 0	OK	Spinning at normal speed
Fans SFT 0 Fan 3 Rotor 1	OK	Spinning at normal speed
Fans SFT 1 Fan 0 Rotor 0	OK	Spinning at normal speed
Fans SFT 1 Fan 0 Rotor 1	OK	Spinning at normal speed
Fans SFT 1 Fan 1 Rotor 0	OK	Spinning at normal speed
Fans SFT 1 Fan 1 Rotor 1	OK	Spinning at normal speed
Fans SFT 1 Fan 2 Rotor 0	OK	Spinning at normal speed
Fans SFT 1 Fan 2 Rotor 1	OK	Spinning at normal speed
Fans SFT 1 Fan 3 Rotor 0	OK	Spinning at normal speed
Fans SFT 1 Fan 3 Rotor 1	OK	Spinning at normal speed
Fans SFT 2 Fan 0 Rotor 0	OK	Spinning at normal speed
Fans SFT 2 Fan 0 Rotor 1	OK	Spinning at normal speed



Fans	SFT 2 Fan 1 Rotor 0	OK	Spinning at normal speed
Fans	SFT 2 Fan 1 Rotor 1	OK	Spinning at normal speed
Fans	SFT 2 Fan 2 Rotor 0	OK	Spinning at normal speed
Fans	SFT 2 Fan 2 Rotor 1	OK	Spinning at normal speed
Fans	SFT 2 Fan 3 Rotor 0	OK	Spinning at normal speed
Fans	SFT 2 Fan 3 Rotor 1	OK	Spinning at normal speed
Fans	SFT 3 Fan 0 Rotor 0	OK	Spinning at normal speed
Fans	SFT 3 Fan 0 Rotor 1	OK	Spinning at normal speed
Fans	SFT 3 Fan 1 Rotor 0	OK	Spinning at normal speed
Fans	SFT 3 Fan 1 Rotor 1	OK	Spinning at normal speed
Fans	SFT 3 Fan 2 Rotor 0	OK	Spinning at normal speed
Fans	SFT 3 Fan 2 Rotor 1	OK	Spinning at normal speed
Fans	SFT 3 Fan 3 Rotor 0	OK	Spinning at normal speed
Fans	SFT 3 Fan 3 Rotor 1	OK	Spinning at normal speed
Fans	SFT 4 Fan 0 Rotor 0	OK	Spinning at normal speed
Fans	SFT 4 Fan 0 Rotor 1	OK	Spinning at normal speed
Fans	SFT 4 Fan 1 Rotor 0	OK	Spinning at normal speed
Fans	SFT 4 Fan 1 Rotor 1	OK	Spinning at normal speed
Fans	SFT 4 Fan 2 Rotor 0	OK	Spinning at normal speed
Fans	SFT 4 Fan 2 Rotor 1	OK	Spinning at normal speed
Fans	SFT 4 Fan 3 Rotor 0	OK	Spinning at normal speed
Fans	SFT 4 Fan 3 Rotor 1	OK	Spinning at normal speed
Fans	SFT 5 Fan 0 Rotor 0	OK	Spinning at normal speed
Fans	SFT 5 Fan 0 Rotor 1	OK	Spinning at normal speed
Fans	SFT 5 Fan 1 Rotor 0	OK	Spinning at normal speed
Fans	SFT 5 Fan 1 Rotor 1	OK	Spinning at normal speed
Fans	SFT 5 Fan 2 Rotor 0	OK	Spinning at normal speed
Fans	SFT 5 Fan 2 Rotor 1	OK	Spinning at normal speed
Fans	SFT 5 Fan 3 Rotor 0	OK	Spinning at normal speed
Fans	SFT 5 Fan 3 Rotor 1	OK	Spinning at normal speed
Fans	SFT 6 Fan 0 Rotor 0	OK	Spinning at normal speed
Fans	SFT 6 Fan 0 Rotor 1	OK	Spinning at normal speed
Fans	SFT 6 Fan 1 Rotor 0	OK	Spinning at normal speed
Fans	SFT 6 Fan 1 Rotor 1	OK	Spinning at normal speed
Fans	SFT 6 Fan 2 Rotor 0	OK	Spinning at normal speed
Fans	SFT 6 Fan 2 Rotor 1	OK	Spinning at normal speed
Fans	SFT 6 Fan 3 Rotor 0	OK	Spinning at normal speed
Fans	SFT 6 Fan 3 Rotor 1	OK	Spinning at normal speed
Fans	SFT 7 Fan 0 Rotor 0	OK	Spinning at normal speed
Fans	SFT 7 Fan 0 Rotor 1	OK	Spinning at normal speed
Fans	SFT 7 Fan 1 Rotor 0	OK	Spinning at normal speed
Fans	SFT 7 Fan 1 Rotor 1	OK	Spinning at normal speed
Fans	SFT 7 Fan 2 Rotor 0	OK	Spinning at normal speed
Fans	SFT 7 Fan 2 Rotor 1	OK	Spinning at normal speed
Fans	SFT 7 Fan 3 Rotor 0	OK	Spinning at normal speed
Fans	SFT 7 Fan 3 Rotor 1	OK	Spinning at normal speed
Power	PEM 0	OK	30 degrees C / 86 degrees F
Power	PEM 1	OK	30 degrees C / 86 degrees F
Power	PEM 2	OK	30 degrees C / 86 degrees F
Power	PEM 3	Absent	
Power	PEM 4	Absent	
Power	PEM 5	Absent	

## show chassis environment

```

user@switch> show chassis environment node-device node1
Class Item                               Status    Measurement
Power node1 Power Supply 0              Absent

```



### node-device (QFabric System)

```

Fans    node1 Power Supply 1      Absent
        node1 Fan Tray 0         Testing
        node1 Fan Tray 1         Testing
        node1 Fan Tray 2         Testing

```

### show chassis environment pem node-device (QFabric System)

```

user@switch> show chassis environment pem node-device node1
FPC 0 PEM 0 status:
  State           Check
  Airflow         Front to Back
  Temperature      OK
  AC Input:        OK
  DC Output        Voltage(V) Current(A) Power(W) Load(%)
                   12          10       120    18
FPC 0 PEM 1 status:
  State           Online
  Airflow         Back to Front
  Temperature      OK
  AC Input:        OK
  DC Output        Voltage(V) Current(A) Power(W) Load(%)
                   11          10       110    17

```

### show chassis environment

```

user@switch> show chassis environment
Class Item          Status Measurement
Temp PDU 0          OK

```



## (PTX5000 Packet Transport Switch)

PDU 0 PSM 0	OK	36 degrees C / 96 degrees F
PDU 0 PSM 1	OK	38 degrees C / 100 degrees F
PDU 0 PSM 2	OK	38 degrees C / 100 degrees F
PDU 0 PSM 3	OK	37 degrees C / 98 degrees F
PDU 1	Absent	
CCG 0	OK	44 degrees C / 111 degrees F
CCG 1	OK	44 degrees C / 111 degrees F
Routing Engine 0	OK	62 degrees C / 143 degrees F
Routing Engine 0 CPU	OK	75 degrees C / 167 degrees F
Routing Engine 1	OK	51 degrees C / 123 degrees F
Routing Engine 1 CPU	OK	64 degrees C / 147 degrees F
CB 0 Intake	OK	38 degrees C / 100 degrees F
CB 0 Exhaust A	OK	46 degrees C / 114 degrees F
CB 0 Exhaust B	OK	42 degrees C / 107 degrees F
CB 1 Intake	OK	35 degrees C / 95 degrees F
CB 1 Exhaust A	OK	39 degrees C / 102 degrees F
CB 1 Exhaust B	OK	36 degrees C / 96 degrees F
SIB 0 Intake	OK	39 degrees C / 102 degrees F
SIB 0 Exhaust	OK	37 degrees C / 98 degrees F
SIB 0 Junction	OK	43 degrees C / 109 degrees F
SIB 1 Intake	OK	39 degrees C / 102 degrees F
SIB 1 Exhaust	OK	36 degrees C / 96 degrees F
SIB 1 Junction	OK	46 degrees C / 114 degrees F
SIB 2 Intake	OK	37 degrees C / 98 degrees F
SIB 2 Exhaust	OK	37 degrees C / 98 degrees F
SIB 2 Junction	OK	42 degrees C / 107 degrees F
SIB 3 Intake	OK	40 degrees C / 104 degrees F
SIB 3 Exhaust	OK	40 degrees C / 104 degrees F
SIB 3 Junction	OK	45 degrees C / 113 degrees F
SIB 4 Intake	OK	47 degrees C / 116 degrees F
SIB 4 Exhaust	OK	44 degrees C / 111 degrees F
SIB 4 Junction	OK	58 degrees C / 136 degrees F
SIB 5 Intake	OK	58 degrees C / 136 degrees F
SIB 5 Exhaust	OK	43 degrees C / 109 degrees F
SIB 5 Junction	OK	71 degrees C / 159 degrees F
SIB 6 Intake	OK	57 degrees C / 134 degrees F
SIB 6 Exhaust	OK	42 degrees C / 107 degrees F
SIB 6 Junction	OK	65 degrees C / 149 degrees F
SIB 7 Intake	OK	58 degrees C / 136 degrees F
SIB 7 Exhaust	OK	42 degrees C / 107 degrees F
SIB 7 Junction	OK	66 degrees C / 150 degrees F
SIB 8 Intake	OK	57 degrees C / 134 degrees F
SIB 8 Exhaust	OK	42 degrees C / 107 degrees F
SIB 8 Junction	OK	70 degrees C / 158 degrees F
FPC 0 PMB	OK	35 degrees C / 95 degrees F
FPC 0 Intake	OK	33 degrees C / 91 degrees F
FPC 0 Exhaust A	OK	51 degrees C / 123 degrees F
FPC 0 Exhaust B	OK	43 degrees C / 109 degrees F
FPC 0 TL0	OK	48 degrees C / 118 degrees F
FPC 0 TQ0	OK	53 degrees C / 127 degrees F
FPC 0 TL1	OK	56 degrees C / 132 degrees F
FPC 0 TQ1	OK	58 degrees C / 136 degrees F
FPC 0 TL2	OK	55 degrees C / 131 degrees F
FPC 0 TQ2	OK	56 degrees C / 132 degrees F
FPC 0 TL3	OK	59 degrees C / 138 degrees F
FPC 0 TQ3	OK	59 degrees C / 138 degrees F
FPC 2 PMB	OK	35 degrees C / 95 degrees F
FPC 2 Intake	OK	34 degrees C / 93 degrees F
FPC 2 Exhaust A	OK	51 degrees C / 123 degrees F
FPC 2 Exhaust B	OK	52 degrees C / 125 degrees F
FPC 2 TL0	OK	53 degrees C / 127 degrees F



FPC 2 TQ0	OK	53 degrees C / 127 degrees F
FPC 2 TL1	OK	57 degrees C / 134 degrees F
FPC 2 TQ1	OK	58 degrees C / 136 degrees F
FPC 2 TL2	OK	54 degrees C / 129 degrees F
FPC 2 TQ2	OK	59 degrees C / 138 degrees F
FPC 2 TL3	OK	60 degrees C / 140 degrees F
FPC 2 TQ3	OK	64 degrees C / 147 degrees F
PIC 2/0 Ambient	OK	49 degrees C / 120 degrees F
FPC 3 PMB	OK	34 degrees C / 93 degrees F
FPC 3 Intake	OK	35 degrees C / 95 degrees F
FPC 3 Exhaust A	OK	54 degrees C / 129 degrees F
FPC 3 Exhaust B	OK	49 degrees C / 120 degrees F
FPC 3 TL0	OK	49 degrees C / 120 degrees F
FPC 3 TQ0	OK	55 degrees C / 131 degrees F
FPC 3 TL1	OK	56 degrees C / 132 degrees F
FPC 3 TQ1	OK	58 degrees C / 136 degrees F
FPC 3 TL2	OK	56 degrees C / 132 degrees F
FPC 3 TQ2	OK	59 degrees C / 138 degrees F
FPC 3 TL3	OK	62 degrees C / 143 degrees F
FPC 3 TQ3	OK	63 degrees C / 145 degrees F
PIC 3/1	Absent	
FPC 5 PMB	OK	35 degrees C / 95 degrees F
FPC 5 Intake	OK	34 degrees C / 93 degrees F
FPC 5 Exhaust A	OK	51 degrees C / 123 degrees F
FPC 5 Exhaust B	OK	53 degrees C / 127 degrees F
FPC 5 TL0	OK	54 degrees C / 129 degrees F
FPC 5 TQ0	OK	52 degrees C / 125 degrees F
FPC 5 TL1	OK	61 degrees C / 141 degrees F
FPC 5 TQ1	OK	60 degrees C / 140 degrees F
FPC 5 TL2	OK	55 degrees C / 131 degrees F
FPC 5 TQ2	OK	55 degrees C / 131 degrees F
FPC 5 TL3	OK	59 degrees C / 138 degrees F
FPC 5 TQ3	OK	58 degrees C / 136 degrees F
PIC 5/0 Ambient	OK	51 degrees C / 123 degrees F
PIC 5/1 Ambient	OK	34 degrees C / 93 degrees F
PIC 5/1 cfp-5/1/0	OK	34 degrees C / 93 degrees F
PIC 5/1 cfp-5/1/1	OK	36 degrees C / 96 degrees F
FPC 6 PMB	OK	36 degrees C / 96 degrees F
FPC 6 Intake	OK	33 degrees C / 91 degrees F
FPC 6 Exhaust A	OK	51 degrees C / 123 degrees F
FPC 6 Exhaust B	OK	39 degrees C / 102 degrees F
FPC 6 TL0	OK	44 degrees C / 111 degrees F
FPC 6 TQ0	OK	54 degrees C / 129 degrees F
FPC 6 TL1	OK	59 degrees C / 138 degrees F
FPC 6 TQ1	OK	58 degrees C / 136 degrees F
FPC 6 TL2	OK	60 degrees C / 140 degrees F
FPC 6 TQ2	OK	57 degrees C / 134 degrees F
FPC 6 TL3	OK	65 degrees C / 149 degrees F
FPC 6 TQ3	OK	60 degrees C / 140 degrees F
FPC 7 PMB	OK	35 degrees C / 95 degrees F
FPC 7 Intake	OK	33 degrees C / 91 degrees F
FPC 7 Exhaust A	OK	53 degrees C / 127 degrees F
FPC 7 Exhaust B	OK	40 degrees C / 104 degrees F
FPC 7 TL0	OK	46 degrees C / 114 degrees F
FPC 7 TQ0	OK	58 degrees C / 136 degrees F
FPC 7 TL1	OK	53 degrees C / 127 degrees F
FPC 7 TQ1	OK	59 degrees C / 138 degrees F
FPC 7 TL2	OK	56 degrees C / 132 degrees F
FPC 7 TQ2	OK	61 degrees C / 141 degrees F
FPC 7 TL3	OK	63 degrees C / 145 degrees F
FPC 7 TQ3	OK	63 degrees C / 145 degrees F



	FPM I2CS	OK	37 degrees C / 98 degrees F
Fans	Fan Tray 0 Fan 1	OK	3042 RPM
	Fan Tray 0 Fan 2	OK	3042 RPM
	Fan Tray 0 Fan 3	OK	3000 RPM
	Fan Tray 0 Fan 4	OK	3042 RPM
	Fan Tray 0 Fan 5	OK	3000 RPM
	Fan Tray 0 Fan 6	OK	3042 RPM
	Fan Tray 0 Fan 7	OK	3085 RPM
	Fan Tray 0 Fan 8	OK	3042 RPM
	Fan Tray 0 Fan 9	OK	3042 RPM
	Fan Tray 0 Fan 10	OK	3085 RPM
	Fan Tray 0 Fan 11	OK	3085 RPM
	Fan Tray 0 Fan 12	OK	3128 RPM
	Fan Tray 0 Fan 13	OK	3128 RPM
	Fan Tray 0 Fan 14	OK	3042 RPM
	Fan Tray 1 Fan 1	OK	2299 RPM
	Fan Tray 1 Fan 2	OK	2399 RPM
	Fan Tray 1 Fan 3	OK	2299 RPM
	Fan Tray 1 Fan 4	OK	2266 RPM
	Fan Tray 1 Fan 5	OK	2266 RPM
	Fan Tray 1 Fan 6	OK	2366 RPM
	Fan Tray 2 Fan 1	OK	2199 RPM
	Fan Tray 2 Fan 2	OK	2133 RPM
	Fan Tray 2 Fan 3	OK	2366 RPM
	Fan Tray 2 Fan 4	OK	2233 RPM
	Fan Tray 2 Fan 5	OK	2399 RPM
	Fan Tray 2 Fan 6	OK	2233 RPM
Misc	SPMB 0 Intake	OK	50 degrees C / 122 degrees F
	SPMB 1 Intake	OK	40 degrees C / 104 degrees F

show chassis  
environment  
(ACX2000 Universal  
Access Router)

user@host> show chassis environment

Class	Item	Status	Measurement
	PCB Left	OK	44 degrees C / 111 degrees F
	SFP+ Xcvr	OK	50 degrees C / 122 degrees F
	FEB	OK	70 degrees C / 158 degrees F
	PCB Up	OK	63 degrees C / 145 degrees F
	PCB Mid	OK	66 degrees C / 150 degrees F
	Telecom Mod	OK	65 degrees C / 149 degrees F
	Routing Engine	OK	54 degrees C / 129 degrees F
	Heater off		



## show chassis environment cb

<b>Syntax</b>	show chassis environment cb <slot>
<b>Syntax (TX Matrix Routers)</b>	show chassis environment cb <lcc number   scc> <slot>
<b>Syntax (TX Matrix Plus Routers)</b>	show chassis environment cb <lcc number   sfc number > <slot>
<b>Syntax (MX Series Routers)</b>	show chassis environment cb <slot> <all-members> <local> <member member-id>
<b>Syntax (MX2010 3D Universal Edge Routers)</b>	show chassis environment cb <slot>
<b>Syntax (MX2020 3D Universal Edge Routers)</b>	show chassis environment cb <slot>
<b>Syntax (QFabric System)</b>	show chassis environment cb <slot interconnect-device interconnect-device-name> < interconnect-device interconnect-device-name slot>
<b>Release Information</b>	<p>Command introduced before Junos Release 7.4.</p> <p>Command introduced in Junos OS Release 9.4 for EX Series switches.</p> <p>Command introduced in Junos OS Release 12.1 for PTX Series Packet Transport Switches.</p> <p>Command introduced in Junos OS Release 12.1 for T4000 Core Routers.</p> <p><b>sfc</b> option introduced for the TX Matrix Plus router in Junos Release 9.6.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Command introduced in Junos OS Release 12.3 for MX2020 3D Universal Edge Routers.</p> <p>Command introduced in Junos OS Release 12.3 for MX2010 3D Universal Edge Routers.</p>
<b>Description</b>	(M120, M320, MX Series, and T Series routers, EX8200 switches, and PTX Series Packet Transport Switches only) Display environmental information about the Control Boards (CBs). For information about the meaning of “CBs” on the switches, see EX Series Switches Hardware and CLI Terminology Mapping.
<b>Options</b>	<b>none</b> —Display environmental information about all CBs. For a TX Matrix router, display environmental information about all CBs on the TX Matrix router and its attached T640 routers. For a TX Matrix Plus router, display environmental information about all CBs on the TX Matrix Plus router and its attached T1600 routers.



**all-members**—(MX Series routers only) (Optional) Display environmental information about the CBs on all the members of the Virtual Chassis configuration.

**interconnect-device**—(QFabric systems only) Display environmental information about the CBs on the Interconnect device.

**lcc-number**—(TX Matrix and TX Matrix Plus routers only) (Optional) For a TX Matrix router, display environmental information about the CBs in a specified T640 router (or line-card chassis) that is connected to the TX Matrix router. For a TX Matrix Plus router, display environmental information about the CBs in a specified T1600 router (or line-card chassis) that is connected to the TX Matrix Plus router. Replace **number** with a value from 0 through 3.

**local**—(MX Series routers only) (Optional) Display environmental information about the CBs on the local Virtual Chassis member.

**member member-id**—(MX Series routers only) (Optional) Display environmental information about the CBs on the specified member of the Virtual Chassis configuration. Replace **member-id** with a value of 0 or 1.

**scc**—(TX Matrix router only) (Optional) Display environmental information about the CBs in the TX Matrix router (or switch-card chassis).

**sfc-number**—(TX Matrix Plus router only) (Optional) Display environmental information about the CBs in the TX Matrix Plus router (or switch-fabric chassis).

**slot**—(Optional) Display environmental information about the specified CB. On routers and PTX Series Packet Transport Switches, replace **slot** with 0 or 1. On EX Series switches replace **slot** with 0, 1, or 2. On QFX Series switches, replace **slot** with 0 or 1.

**Required Privilege Level**

view

**Related Documentation**

- [request chassis cb on page 317](#)
- Switching Control Board Redundancy
- Routing Engine and Switching Control Board Redundancy Configuration Statements

**List of Sample Output**

[show chassis environment cb \(M120 Router\) on page 520](#)  
[show chassis environment cb \(M320 Router\) on page 520](#)  
[show chassis environment cb \(MX80 Router\) on page 520](#)  
[show chassis environment cb \(MX240 Router\) on page 521](#)  
[show chassis environment cb \(MX240 Router with Enhanced MX SCB\) on page 521](#)  
[show chassis environment cb \(MX480 Router\) on page 522](#)  
[show chassis environment cb \(MX480 Router with Enhanced MX SCB\) on page 522](#)  
[show chassis environment cb \(MX960 Router\) on page 523](#)  
[show chassis environment cb \(MX960 Router with Enhanced MX SCB\) on page 523](#)  
[show chassis environment cb \(MX2020 Router\) on page 524](#)  
[show chassis environment cb \(MX2010 Router\) on page 525](#)  
[show chassis environment cb \(T4000 Core Router\) on page 525](#)



[show chassis environment cb \(TX Matrix Router\) on page 526](#)  
[show chassis environment cb \(TX Matrix Plus Router\) on page 527](#)  
[show chassis environment cb \(EX8200 Switch\) on page 531](#)  
[show chassis environment cb \(EX8208 Switch\) on page 532](#)  
[show chassis environment cb \(PTX5000 Packet Transport Switch\) on page 533](#)  
[show chassis environment cb \(QFabric System\) on page 534](#)

**Output Fields** Table 40 on page 519 lists the output fields for the **show chassis environment cb** command. Output fields are listed in the approximate order in which they appear.

**Table 40: show chassis environment cb Output Fields**

Field Name	Field Description
<b>State</b>	<p>Status of the CB. If two CBs are installed and online, one is functioning as the master, and the other is the standby.</p> <ul style="list-style-type: none"> <li>• <b>Online</b>—CB is online and running.</li> <li>• <b>Offline</b>— CB is powered down.</li> </ul> <p><b>NOTE:</b> On the EX8208 switch, the installation can include three CBs. See EX Series Switches Hardware and CLI Terminology Mapping.</p>
<b>Temperature</b>	<p>Temperature in Celsius (C) and Fahrenheit (F) of the air flowing past the CB.</p> <ul style="list-style-type: none"> <li>• <b>Temperature Intake</b>—Measures the temperature of the air intake to cool the power supplies.</li> <li>• <b>Temperature Exhaust</b>—Measures the temperature of the hot air exhaust.</li> </ul> <p><b>NOTE:</b> On the MX2010 and MX2020 routers, the intake temperature measures the temperature of the air intake to cool the Control Board (CB). The MX2010 and MX2020 routers include intake and exhaust temperatures for multiple zones (<b>Intake A</b>, <b>Intake B</b>, <b>Intake C</b>, <b>Exhaust A</b>, <b>Exhaust B</b>, and <b>TCBC</b>).</p>
<b>Power</b>	<p>Power required and measured on the CB. The left column displays the required power, in volts. The right column displays the measured power, in millivolts.</p>
<b>BUS Revision</b>	<p>Revision level of the generic bus device. (Not on switches.)</p>
<b>FPGA Revision</b>	<p>Revision level of the field-programmable gate array (FPGA). (Not on switches.)</p>
<b>PMBus device</b> (on MX240, MX480, and MX960 routers with Enhanced MX SCB)	<p>Enhanced SCB on MX 240, MX480, and MX960 routers allows the system to save power by supplying only the amount of voltage that is required. Configurable PMBus devices are used to provide the voltage for each individual device. There is one PMBus device for each XF ASIC so that the output can be customized to each device. The following PMBus device information is displayed for routers with Enhanced MX SCB:</p> <ul style="list-style-type: none"> <li>• <b>Expected voltage</b></li> <li>• <b>Measured voltage</b></li> <li>• <b>Measured current</b></li> <li>• <b>Calculated power</b></li> </ul>



## Sample Output

**show chassis  
environment cb (M120  
Router)**

```
user@host> show chassis environment cb
CB 0 status:
  State                Online Master
  Temperature          33 degrees C / 91 degrees F
  Power
    1.2 V              1214 mV
    1.5 V              1495 mV
    2.5 V              2494 mV
    3.3 V              3319 mV
    5.0 V              5085 mV
    3.3 V bias         3296 mV
  Bus Revision         12
  FPGA Revision        17
CB 1 status:
  State                Online Standby
  Temperature          34 degrees C / 93 degrees F
  Power
    1.2 V              1195 mV
    1.5 V              1495 mV
    2.5 V              2504 mV
    3.3 V              3312 mV
    5.0 V              5111 mV
    3.3 V bias         3296 mV
  Bus Revision         12
  FPGA Revision        17
```

**show chassis  
environment cb (M320  
Router)**

```
user@host> show chassis environment cb
CB 0 status:
  State                Online Master
  Temperature          29 degrees C / 84 degrees F
  Power:
    1.8 V              1805 mV
    2.5 V              2501 mV
    3.3 V              3293 mV
    4.6 V              4725 mV
    5.0 V              5032 mV
    12.0 V             11975 mV
    3.3 V bias         3286 mV
    8.0 V bias         7589 mV
  BUS Revision         40
  FPGA Revision        7
CB 1 status:
  State                Online Standby
  Temperature          32 degrees C / 89 degrees F
  Power:
    1.8 V              1802 mV
    2.5 V              2482 mV
    3.3 V              3289 mV
    4.6 V              4720 mV
    5.0 V              5001 mV
    12.0 V             11946 mV
    3.3 V bias         3274 mV
    8.0 V bias         7562 mV
  BUS Revision         40
  FPGA Revision        7
```



### show chassis environment cb (MX80 Router)

```
user@host> show chassis environment cb
CB 0 status:
State                               Online Master
Temperature                         36 degrees C / 96 degrees F
Power 1
  1.0 V                             1034 mV
  1.0 V MQ                           1037 mV
  1.0 V LU                           1005 mV
  1.2 V                             1218 mV
  1.5 V                             1524 mV
  1.8 V                             1814 mV
  2.5 V                             2558 mV
  3.3 V                             3296 mV
  5.0 V                             5233 mV
  5.0 V bias                         5207 mV
  12.0 V                            12162 mV
```

### show chassis environment cb (MX240 Router)

```
user@host> show chassis environment cb
CB 0 status:
State                               Online Standby
Temperature                         37 degrees C / 98 degrees F
Power 1
  1.2 V                             1208 mV
  1.5 V                             1521 mV
  1.8 V                             1811 mV
  2.5 V                             2513 mV
  3.3 V                             3332 mV
  5.0 V                             5059 mV
  12.0 V                            12162 mV
  1.25 V                            1260 mV
  3.3 V SM3                         3306 mV
  5.0 V RE                          5085 mV
  12.0 V RE                         11872 mV
Power 2
  11.3 V bias PEM                   11272 mV
  4.6 V bias MidPlane               4827 mV
  11.3 V bias FPD                   11272 mV
  11.3 V bias POE 0                 11292 mV
  11.3 V bias POE 1                 11253 mV
Bus Revision                        42
FPGA Revision                       1
```

### show chassis environment cb

```
user@host> show chassis environment cb
CB 0 status:
State                               Online Standby
```



**(MX240 Router with  
Enhanced MX SCB)**

```

Temperature                               37 degrees C / 98 degrees F
Power 1
  1.2 V                                   1208 mV
  1.5 V                                   1521 mV
  1.8 V                                   1811 mV
  2.5 V                                   2513 mV
  3.3 V                                   3332 mV
  5.0 V                                   5059 mV
 12.0 V                                   12162 mV
  1.25 V                                  1260 mV
  3.3 V SM3                              3306 mV
  5.0 V RE                               5085 mV
 12.0 V RE                               11872 mV
Power 2
 11.3 V bias PEM                          11272 mV
  4.6 V bias MidPlane                     4827 mV
 11.3 V bias FPD                          11272 mV
 11.3 V bias POE 0                        11292 mV
 11.3 V bias POE 1                        11253 mV
Bus Revision                             42
FPGA Revision                             1
PMBus
device      Expected    Measured    Measured    Calculated
              voltage    voltage    current    power
XF ASIC A    1000 mV      997 mV      11031 mA    10997 mW
XF ASIC B    1000 mV      996 mV      12125 mA    12076 mW

```

**show chassis  
environment cb  
(MX480 Router)**

```

user@host> show chassis environment cb
CB 0 status:
State                               Online Master
Temperature                         41 degrees C / 105 degrees F
Power 1
  1.2 V                                   1202 mV
  1.5 V                                   1511 mV
  1.8 V                                   1798 mV
  2.5 V                                   2507 mV
  3.3 V                                   3312 mV
  5.0 V                                   5027 mV
 12.0 V                                   12200 mV
  1.25 V                                  1260 mV
  3.3 V SM3                              3293 mV
  5 V RE                                  5040 mV
 12 V RE                                  11910 mV
Power 2
 11.3 V bias PEM                          11156 mV
  4.6 V bias MidPlane                     4801 mV
 11.3 V bias FPD                          11214 mV
 11.3 V bias POE 0                        11098 mV
 11.3 V bias POE 1                        11330 mV
Bus Revision                             42
FPGA Revision                             1

```

**show chassis  
environment cb**

```

user@host> show chassis environment cb
CB 0 status:
State                               Online Master

```



**(MX480 Router with  
Enhanced MX SCB)**

```

Temperature                               41 degrees C / 105 degrees F
Power 1
  1.2 V                                   1202 mV
  1.5 V                                   1511 mV
  1.8 V                                   1798 mV
  2.5 V                                   2507 mV
  3.3 V                                   3312 mV
  5.0 V                                   5027 mV
  12.0 V                                  12200 mV
  1.25 V                                  1260 mV
  3.3 V SM3                              3293 mV
  5 V RE                                  5040 mV
  12 V RE                                 11910 mV
Power 2
  11.3 V bias PEM                         11156 mV
  4.6 V bias MidPlane                     4801 mV
  11.3 V bias FPD                         11214 mV
  11.3 V bias POE 0                       11098 mV
  11.3 V bias POE 1                       11330 mV
Bus Revision                             42
FPGA Revision                             1
PMBus
device      Expected    Measured    Measured    Calculated
              voltage    voltage     current     power
XF ASIC A    1000 mV      997 mV      11031 mA    10997 mW
XF ASIC B    1000 mV      996 mV      12125 mA    12076 mW

```

**show chassis  
environment cb  
(MX960 Router)**

```

user@host> show chassis environment cb
CB 0 status:
State                               Online Master
Temperature                         24 degrees C / 75 degrees F
Power 1
  1.2 V                               1965 mV
  1.5 V                               2465 mV
  1.8 V                               2990 mV
  2.5 V                               3296 mV
  3.3 V                               3296 mV
  5.0 V                               6593 mV
  12.0 V                              13187 mV
  3.3 V bias                          3296 mV
  1.25 V                              1994 mV
  3.3 V SM3                           3296 mV
  5 V RE                              6593 mV
  12 V RE                             13174 mV
Power 2                               Sensor failure
Bus Revision                         4
FPGA Revision                         3

```

**show chassis  
environment cb**

```

user@host> show chassis environment cb
CB 0 status:
State                               Online Master

```



**(MX960 Router with  
Enhanced MX SCB)**

```

Temperature                24 degrees C / 75 degrees F
Power 1
  1.2 V                    1965 mV
  1.5 V                    2465 mV
  1.8 V                    2990 mV
  2.5 V                    3296 mV
  3.3 V                    3296 mV
  5.0 V                    6593 mV
 12.0 V                   13187 mV
  3.3 V bias               3296 mV
  1.25 V                   1994 mV
  3.3 V SM3                3296 mV
  5 V RE                   6593 mV
 12 V RE                  13174 mV
Power 2                    Sensor failure
Bus Revision               4
FPGA Revision              3
PMBus
device      Expected    Measured    Measured    Calculated
            voltage     voltage     current     power
XF ASIC A   1000 mV      997 mV      11031 mA    10997 mW
XF ASIC B   1000 mV      996 mV      12125 mA    12076 mW

```

**show chassis  
environment cb  
(MX2020 Router)**

```

user@host> show chassis environment cb
CB 0 status:
  State                Online Master
  IntakeA-Zone0 Temperature 44 degrees C / 111 degrees F
  IntakeB-Zone1 Temperature 34 degrees C / 93 degrees F
  IntakeC-Zone0 Temperature 45 degrees C / 113 degrees F
  ExhaustA-Zone0 Temperature 43 degrees C / 109 degrees F
  ExhaustB-Zone1 Temperature 36 degrees C / 96 degrees F
  TCBC-Zone0 Temperature 39 degrees C / 102 degrees F
  Power 1
    1.0 V                1011 mV
    1.2 V                1208 mV
    1.8 V                1801 mV
    2.5 V                2552 mV
    3.3 V                3312 mV
    5.0 V                5040 mV
    5.0 V RE             4988 mV
    12.0 V              12065 mV
    12.0 V RE           12046 mV
  Bus Revision          99
  FPGA Revision         270
CB 1 status:
  State                Online Standby
  IntakeA-Zone0 Temperature 45 degrees C / 113 degrees F
  IntakeB-Zone1 Temperature 41 degrees C / 105 degrees F
  IntakeC-Zone0 Temperature 46 degrees C / 114 degrees F
  ExhaustA-Zone0 Temperature 44 degrees C / 111 degrees F
  ExhaustB-Zone1 Temperature 41 degrees C / 105 degrees F
  TCBC-Zone0 Temperature 45 degrees C / 113 degrees F
  Power 1
    1.0 V                1008 mV
    1.2 V                1208 mV
    1.8 V                1798 mV
    2.5 V                2539 mV
    3.3 V                3325 mV
    5.0 V                5033 mV
    5.0 V RE             4950 mV
    12.0 V              12046 mV
    12.0 V RE           11968 mV

```



```

Bus Revision          99
FPGA Revision         0

```

**show chassis  
environment cb  
(MX2010 Router)**

```

user@host> show chassis environment cb
CB 0 status:
  State                Online Master
  IntakeA-Zone0 Temperature 36 degrees C / 96 degrees F
  IntakeB-Zone1 Temperature 30 degrees C / 86 degrees F
  IntakeC-Zone0 Temperature 38 degrees C / 100 degrees F
  ExhaustA-Zone0 Temperature 36 degrees C / 96 degrees F
  ExhaustB-Zone1 Temperature 32 degrees C / 89 degrees F
  TCBC-Zone0 Temperature   34 degrees C / 93 degrees F
  Power 1
    1.0 V                1015 mV
    1.2 V                1205 mV
    1.8 V                1804 mV
    2.5 V                2552 mV
    3.3 V                3325 mV
    5.0 V                5020 mV
    5.0 V RE             4988 mV
    12.0 V               12104 mV
    12.0 V RE            12026 mV
  Bus Revision          100
  FPGA Revision         270
CB 1 status:
  State                Online
  IntakeA-Zone0 Temperature 35 degrees C / 95 degrees F
  IntakeB-Zone1 Temperature 28 degrees C / 82 degrees F
  IntakeC-Zone0 Temperature 37 degrees C / 98 degrees F
  ExhaustA-Zone0 Temperature 34 degrees C / 93 degrees F
  ExhaustB-Zone1 Temperature 29 degrees C / 84 degrees F
  TCBC-Zone0 Temperature   32 degrees C / 89 degrees F
  Power 1
    1.0 V                1011 mV
    1.2 V                1208 mV
    1.8 V                1788 mV
    2.5 V                2526 mV
    3.3 V                3319 mV
    5.0 V                5046 mV
    5.0 V RE             4975 mV
    12.0 V               12046 mV
    12.0 V RE            12007 mV
  Bus Revision          100
  FPGA Revision         0

```

**show chassis  
environment cb  
(T4000 Core Router)**

```

user@host> show chassis environment cb
CB 0 status:
  State                Online Master
  Temperature          33 degrees C / 91 degrees F
  Power 1
    1.8 V                1805 mV
    2.5 V                2523 mV
    3.3 V                3324 mV
    3.3 V bias          3296 mV
    4.6 V                4680 mV
    5.0 V                4893 mV
    8.0 V bias          7572 mV
    12.0 V              11916 mV
  Power 2
    1.0 V                993 mV

```



```

1.2 V          1210 mV
3.3 V RE       3330 mV
Bus Revision   51
FPGA Revision  5
CB 1 status:
State          Online Standby
Temperature    33 degrees C / 91 degrees F
Power 1
1.8 V          1810 mV
2.5 V          2496 mV
3.3 V          3308 mV
3.3 V bias     3286 mV
4.6 V          4692 mV
5.0 V          4954 mV
8.0 V bias     7282 mV
12.0 V         11926 mV
Power 2
1.0 V          993 mV
1.2 V          1185 mV
3.3 V RE       3316 mV
Bus Revision   51
FPGA Revision  5

```

**show chassis  
environment cb  
(TX Matrix Router)**

```
user@host> show chassis environment cb
```

```

-----
CB 0 status:
State          Online Master
Temperature    32 degrees C / 89 degrees F
Power:
1.8 V          1797 mV
2.5 V          2477 mV
3.3 V          3311 mV
4.6 V          4727 mV
5.0 V          5015 mV
12.0 V         12185 mV
3.3 V bias     3304 mV
8.0 V bias     7870 mV
BUS Revision   40
FPGA Revision  1
CB 1 status:
State          Online Standby
...

```

```
1cc0-re0:
```

```

-----
CB 0 status:
State          Online Master
Temperature    32 degrees C / 89 degrees F
Power:
1.8 V          1787 mV
2.5 V          2473 mV
3.3 V          3306 mV
4.6 V          4793 mV
5.0 V          5025 mV
12.0 V         12156 mV
3.3 V bias     3289 mV
8.0 V bias     7609 mV
BUS Revision   40
FPGA Revision  5
CB 1 status:
State          Online Standby

```



```
....
BUS Revision          40
FPGA Revision         5

lcc2-re0:
-----
CB 0 status:
  State              Online Master
...
CB 1 status:
  State              Online Standby
...
```

**show chassis  
environment cb**

```
user@host> show chassis environment cb
sfc0-re0:
-----
```



**(TX Matrix Plus Router)**

```
CB 0 status:
State                               Online Master
Temperature                         38 degrees C / 100 degrees F
Power 1
  1.0 V                             1005 mV
  1.1 V                             1108 mV
  1.2 V                             1205 mV
  1.25 V                            1269 mV
  1.5 V                             1508 mV
  1.8 V                             1814 mV
  2.5 V                             2507 mV
  3.3 V                             3306 mV
  3.3 V bias                         3300 mV
  9.0 V                             9058 mV
  9.0 V RE                           9107 mV
Power 2
  3.9 V                             3963 mV
  5.0 V                             5020 mV
  9.0 V                             9087 mV
Bus Revision                        79
FPGA Revision                       23
CB 1 status:
State                               Online Standby
Temperature                         39 degrees C / 102 degrees F
Power 1
  1.0 V                             1002 mV
  1.1 V                             1105 mV
  1.2 V                             1198 mV
  1.25 V                            1276 mV
  1.5 V                             1504 mV
  1.8 V                             1804 mV
  2.5 V                             2507 mV
  3.3 V                             3300 mV
  3.3 V bias                         3293 mV
  9.0 V                             9039 mV
  9.0 V RE                           9049 mV
Power 2
  3.9 V                             3892 mV
  5.0 V                             5040 mV
  9.0 V                             9058 mV
Bus Revision                        79
FPGA Revision                       23
```

lcc0-re0:

```
-----
CB 0 status:
State                               Online Master
Temperature                         39 degrees C / 102 degrees F
Power 1
  1.8 V                             1799 mV
  2.5 V                             2499 mV
  3.3 V                             3327 mV
  3.3 V bias                         3299 mV
  4.6 V                             4673 mV
  5.0 V                             4918 mV
  8.0 V bias                         7308 mV
  12.0 V                            11887 mV
Power 2
  1.0 V                             996 mV
  1.2 V                             1199 mV
  3.3 V RE                           3319 mV
```



```

Bus Revision          51
FPGA Revision         3
CB 1 status:
State                 Online Standby
Temperature            40 degrees C / 104 degrees F
Power 1
  1.8 V               1800 mV
  2.5 V               2496 mV
  3.3 V               3322 mV
  3.3 V bias          3284 mV
  4.6 V               4680 mV
  5.0 V               4954 mV
  8.0 V bias          7284 mV
  12.0 V              11902 mV
Power 2
  1.0 V               998 mV
  1.2 V               1205 mV
  3.3 V RE            3327 mV
Bus Revision          51
FPGA Revision         3

```

```

1cc1-re0:
-----

```

```

CB 0 status:
State                 Online Master
Temperature            41 degrees C / 105 degrees F
Power 1
  1.8 V               1804 mV
  2.5 V               2517 mV
  3.3 V               3300 mV
  3.3 V bias          3284 mV
  4.6 V               4681 mV
  5.0 V               4927 mV
  8.0 V bias          7357 mV
  12.0 V              11907 mV
Power 2
  1.0 V               991 mV
  1.2 V               1202 mV
  3.3 V RE            3301 mV
Bus Revision          51
FPGA Revision         3

```

```

CB 1 status:
State                 Online Standby
Temperature            40 degrees C / 104 degrees F
Power 1
  1.8 V               1805 mV
  2.5 V               2528 mV
  3.3 V               3324 mV
  3.3 V bias          3289 mV
  4.6 V               4694 mV
  5.0 V               4959 mV
  8.0 V bias          7311 mV
  12.0 V              11926 mV
Power 2
  1.0 V               998 mV
  1.2 V               1200 mV
  3.3 V RE            3313 mV
Bus Revision          51
FPGA Revision         3

```

```

1cc2-re0:

```



```
-----
CB 0 status:
State                               Online Master
Temperature                         41 degrees C / 105 degrees F
Power 1
  1.8 V                             1805 mV
  2.5 V                             2494 mV
  3.3 V                             3333 mV
  3.3 V bias                         3296 mV
  4.6 V                             4673 mV
  5.0 V                             4901 mV
  8.0 V bias                         7343 mV
  12.0 V                            11916 mV
Power 2
  1.0 V                             993 mV
  1.2 V                             1213 mV
  3.3 V RE                          3328 mV
Bus Revision                        51
FPGA Revision                       3
CB 1 status:
State                               Online Standby
Temperature                         41 degrees C / 105 degrees F
Power 1
  1.8 V                             1804 mV
  2.5 V                             2523 mV
  3.3 V                             3334 mV
  3.3 V bias                         3291 mV
  4.6 V                             4697 mV
  5.0 V                             4969 mV
  8.0 V bias                         7308 mV
  12.0 V                            11936 mV
Power 2
  1.0 V                             996 mV
  1.2 V                             1200 mV
  3.3 V RE                          3328 mV
Bus Revision                        51
FPGA Revision                       3
lcc3-re0:
-----
```

```
CB 0 status:
State                               Online Master
Temperature                         37 degrees C / 98 degrees F
Power 1
  1.8 V                             1809 mV
  2.5 V                             2510 mV
  3.3 V                             3296 mV
  3.3 V bias                         3291 mV
  4.6 V                             4670 mV
  5.0 V                             4905 mV
  8.0 V bias                         7211 mV
  12.0 V                            11882 mV
Power 2
  1.0 V                             996 mV
  1.2 V                             1188 mV
  3.3 V RE                          3326 mV
Bus Revision                        51
FPGA Revision                       5
CB 1 status:
State                               Online Standby
Temperature                         38 degrees C / 100 degrees F
```



```

Power 1
 1.8 V      1813 mV
 2.5 V      2510 mV
 3.3 V      3322 mV
 3.3 V bias 3289 mV
 4.6 V      4692 mV
 5.0 V      4967 mV
 8.0 V bias 7194 mV
12.0 V     11916 mV
Power 2
 1.0 V      996 mV
 1.2 V     1205 mV
 3.3 V RE   3273 mV
Bus Revision      51
FPGA Revision     5

```

show chassis  
environment cb  
(EX8200 Switch)

user@host> show chassis environment cb

```

CB 0 status:
State                Online Master
Temperature Intake    20 degrees C / 68 degrees F
Temperature Exhaust   24 degrees C / 75 degrees F
Power 1
 1.1 V      1086 mV
 1.2 V      1179 mV
 1.2 V *    1182 mV
 1.2 V *    1182 mV
 1.25 V     1211 mV
 1.5 V      1472 mV
 1.8 V      1756 mV
 2.5 V      2449 mV
 3.3 V      3254 mV
 3.3 V bias 3300 mV
 5.0 V      4911 mV
12.0 V     11891 mV
Power 2
 3.3 V bias * 3615 mV
 3.3 V bias * 3615 mV
 3.3 V bias * 3567 mV
 3.3 V bias * 3664 mV
 4.3 V bias * 4224 mV
 4.3 V bias * 4215 mV
 4.3 V bias * 4224 mV
 4.3 V bias * 4205 mV
 4.3 V bias * 4195 mV
 4.3 V bias * 4215 mV
 5.0 V bias 4920 mV
CB 1 status:
State                Online Standby
Temperature Intake    19 degrees C / 66 degrees F
Temperature Exhaust   23 degrees C / 73 degrees F
Power 1
 1.1 V      1082 mV
 1.2 V      1169 mV
 1.2 V *    1179 mV
 1.2 V *    1179 mV
 1.25 V     1214 mV
 1.5 V      1482 mV
 1.8 V      1759 mV
 2.5 V      2481 mV
 3.3 V      3248 mV

```



```

3.3 V bias          3306 mV
5.0 V              4911 mV
12.0 V            11910 mV
Power 2
3.3 V bias *       3644 mV
3.3 V bias *       3664 mV
3.3 V bias *       3586 mV
3.3 V bias *       3654 mV
4.3 V bias *       4224 mV
4.3 V bias *       4215 mV
4.3 V bias *       4224 mV
4.3 V bias *       4205 mV
4.3 V bias *       4244 mV
4.3 V bias *       4215 mV
5.0 V bias         4930 mV
CB 2 status:
State              Online
Temperature Intake 19 degrees C / 66 degrees F
Temperature Exhaust 23 degrees C / 73 degrees F
Power 1
1.2 V             1195 mV
1.5 V             1511 mV
1.8 V             1804 mV
2.5 V             2526 mV
3.3 V             3300 mV
3.3 V bias        3306 mV
12.0 V           12220 mV

```

**show chassis  
environment cb  
(EX8208 Switch)**

```

user@host> show chassis environment cb
CB 0 status:
State              Online Master
Temperature Intake 20 degrees C / 68 degrees F
Temperature Exhaust 24 degrees C / 75 degrees F
Power 1
1.1 V             1086 mV
1.2 V             1179 mV
1.2 V *           1182 mV
1.2 V *           1182 mV
1.25 V            1211 mV
1.5 V             1466 mV
1.8 V             1759 mV
2.5 V             2455 mV
3.3 V             3261 mV
3.3 V bias        3300 mV
5.0 V             4930 mV
12.0 V           11891 mV
Power 2
3.3 V bias *       3606 mV
3.3 V bias *       3615 mV
3.3 V bias *       3567 mV
3.3 V bias *       3673 mV
4.3 V bias *       4224 mV
4.3 V bias *       4215 mV
4.3 V bias *       4234 mV
4.3 V bias *       4205 mV
4.3 V bias *       4186 mV
4.3 V bias *       4215 mV
5.0 V bias         4940 mV
CB 1 status:
State              Online Standby
Temperature Intake 19 degrees C / 66 degrees F

```



```

Temperature Exhaust      23 degrees C / 73 degrees F
Power 1
  1.1 V                  1086 mV
  1.2 V                  1169 mV
  1.2 V *                1179 mV
  1.2 V *                1179 mV
  1.25 V                 1211 mV
  1.5 V                  1479 mV
  1.8 V                  1759 mV
  2.5 V                  2475 mV
  3.3 V                  3235 mV
  3.3 V bias             3306 mV
  5.0 V                  4930 mV
  12.0 V                 11891 mV
Power 2
  3.3 V bias *           3644 mV
  3.3 V bias *           3664 mV
  3.3 V bias *           3586 mV
  3.3 V bias *           3654 mV
  4.3 V bias *           4215 mV
  4.3 V bias *           4224 mV
  4.3 V bias *           4215 mV
  4.3 V bias *           4215 mV
  4.3 V bias *           4234 mV
  4.3 V bias *           4224 mV
  5.0 V bias             4920 mV
CB 2 status:
State                    Online
Temperature Intake       20 degrees C / 68 degrees F
Temperature Exhaust      24 degrees C / 75 degrees F
Power 1
  1.2 V                  1202 mV
  1.5 V                  1508 mV
  1.8 V                  1804 mV
  2.5 V                  2520 mV
  3.3 V                  3300 mV
  3.3 V bias             3300 mV
  12.0 V                 12200 mV

```

```

show chassis
environment cb

```

```

user@host> show chassis environment cb
CB 0 status:
State                    Online Master

```



**(PTX5000 Packet Transport Switch)**

```

Intake Temperature      38 degrees C / 100 degrees F
Exhaust A Temperature   45 degrees C / 113 degrees F
Exhaust B Temperature   42 degrees C / 107 degrees F
Power 1
  1.2 V                 1200 mV
  1.25 V                1250 mV
  2.5 V                 2500 mV
  3.3 V                 3300 mV
Power 2
  1.0 V                 1000 mV
  3.3 V bias            3293 mV
  3.9 V                 3921 mV
Bus Revision            132
FPGA Revision           27
CB 1 status:
State                   Online Standby
Intake Temperature      34 degrees C / 93 degrees F
Exhaust A Temperature   39 degrees C / 102 degrees F
Exhaust B Temperature   36 degrees C / 96 degrees F
Power 1
  1.2 V                 1199 mV
  1.25 V                1250 mV
  2.5 V                 2499 mV
  3.3 V                 3299 mV
Power 2
  1.0 V                 1000 mV
  3.3 V bias            3312 mV
  3.9 V                 3961 mV
Bus Revision            132
FPGA Revision           28

```

**show chassis  
environment cb  
(QFabric System)**

```

user@switch> show chassis environment cb interconnect-device IC-123 0
CB 0 status:
State                   Online Master
Left Intake Temperature 33 degrees C / 91 degrees F
Right Intake Temperature 33 degrees C / 91 degrees F
Left Exhaust Temperature 36 degrees C / 96 degrees F
Right Exhaust Temperature 35 degrees C / 95 degrees F
Power                   OK
  VDD 3V3               3294 mV
  VDD 2V5               2436 mV
  VDD 1V8               1746 mV
  VDD 1V5               1460 mV
  VDD 1V25              1210 mV
  VDD 1V2               1164 mV
  CPU CORE 1V2          1120 mV
  VDD 1V0               968 mV
  VDD 5V0               5088 mV
  CPU MP BIAS 4V3       4050 mV
  BIAS 3V3              3180 mV
  VTT 0V9               866 mV

```



## show chassis environment fpc

<b>Syntax</b>	show chassis environment fpc <slot>
<b>Syntax (TX Matrix and TX Matrix Plus Routers)</b>	show chassis environment fpc <fcc number> <slot>
<b>Syntax (MX Series Routers)</b>	show chassis environment fpc <slot> <all-members> <local> <member <i>member-id</i> >
<b>Syntax (MX2010 3D Universal Edge Routers)</b>	show chassis environment fpc <slot>
<b>Syntax (MX2020 3D Universal Edge Routers)</b>	show chassis environment fpc <slot>
<b>Syntax (QFX Series)</b>	show chassis environment fpc <fpc-slot> interconnect-device <i>name</i>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for QFX Series. Command introduced in Junos OS Release 12.1 for PTX Series Packet Transport Switches. Command introduced in Junos OS Release 12.1 for T4000 Core Routers. Command introduced in Junos OS Release 12.3 for MX2020 3D Universal Edge Routers. Command introduced in Junos OS Release 12.3 for MX2010 3D Universal Edge Routers.
<b>Description</b>	(M40e, M120, M160, M320, MX Series, T Series routers, EX Series, QFX Series, and PTX Series switches only) Display environmental information about Flexible PIC Concentrators (FPCs).
<b>Options</b>	<p><b>none</b>—Display environmental information about all FPCs. On a TX Matrix router, display environmental information about all FPCs on the TX Matrix router and its attached T640 routers. On a TX Matrix Plus router, display environmental information about all FPCs on the TX Matrix Plus router and its attached T1600 routers.</p> <p><b>all-members</b>—(MX Series routers only) (Optional) Display environmental information for the FPCs in all the members of the Virtual Chassis configuration.</p> <p><b>interconnect-device <i>name</i></b>—(QFabric systems only) (Optional) Display chassis environmental information for the Interconnect device.</p> <p><b>fcc number</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display environmental information about the FPC in a T640 router (or line-card</p>



chassis) that is connected to the TX Matrix router. On a TX Matrix Plus router, display environmental information about the FPC in a T1600 router (or line-card chassis) that is connected to the TX Matrix Plus router. Replace **number** with a value from 0 through 3.

**local**—(MX Series routers only) (Optional) Display environmental information for the FPCs in the local Virtual Chassis member.

**member member-id**—(MX Series routers only) (Optional) Display environmental information for the FPCs in the specified member of the Virtual Chassis configuration. Replace **member-id** with a value of 0 or 1.

**slot or fpc-slot**—(Optional) Display environmental information about an individual FPC:

- (TX Matrix and TX Matrix Plus routers only) On a TX Matrix router, if you specify the number of the T640 router by using only the **lcc number** option (the recommended method), replace **slot** with a value from 0 through 7. Similarly, on a TX Matrix Plus router, if you specify the number of the T1600 router by using only the **lcc number** option (the recommended method), replace **slot** with a value from 0 through 7. Otherwise, replace **slot** with a value from 0 through 31. For example, the following commands have the same result:

```
user@host> show chassis environment fpc 1 lcc 1
```

```
user@host> show chassis environment fpc 9
```

- M120 router—Replace **slot** with a value from 0 through 5.
- MX240 router—Replace **slot** with a value from 0 through 2.
- MX480 router—Replace **slot** with a value from 0 through 5.
- MX960 router—Replace **slot** with a value from 0 through 11.
- MX2010 router—Replace **slot** with a value from 0 through 9.
- MX2020 router—Replace **slot** with a value from 0 through 19.
- Other routers—Replace **slot** with a value from 0 through 7.
- EX Series switches:
  - EX3200 switches and EX4200 standalone switches—Replace **slot** with 0.
  - EX4200 switches in a Virtual Chassis configuration—Replace **slot** with a value from 0 through 9 (switch's member ID).
  - EX6210 switches—Replace **slot** with a value from 0 through 3 (line card only), 4 or 5 (line card or Switch Fabric and Rotating Engine (SRE) module), or 6 through 9 (line card only).
  - EX8208 switches—Replace **slot** with a value from 0 through 7 (line card).
  - EX8216 switches—Replace **slot** with a value from 0 through 15 (line card).
- QFX3500 switches —Replace **fpc-slot** with 0 through 15.
- PTX5000 Packet Transport Switch—Replace **fpc-slot** with 0 through 7.



<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">request chassis fpc on page 320</a></li> <li>• <a href="#">show chassis fpc on page 599</a></li> <li>• <a href="#">show chassis fpc-feb-connectivity</a></li> <li>• <a href="#">Configuring the Junos OS to Resynchronize FPC Sequence Numbers with Active FPCs when an FPC Comes Online</a></li> <li>• <a href="#">MX960 Flexible PIC Concentrator Description</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show chassis environment fpc (M120 Router) on page 539</a> <a href="#">show chassis environment fpc (M160 Router) on page 539</a> <a href="#">show chassis environment fpc (M320 Router) on page 540</a> <a href="#">show chassis environment fpc (MX2020 Router) on page 541</a> <a href="#">show chassis environment fpc (MX2010 Router) on page 543</a> <a href="#">show chassis environment fpc (MX240 Router) on page 546</a> <a href="#">show chassis environment fpc (MX480 Router) on page 547</a> <a href="#">show chassis environment fpc (MX960 Router) on page 547</a> <a href="#">show chassis environment fpc (MX480 Router with 100-Gigabit Ethernet CFP) on page 549</a> <a href="#">show chassis environment fpc (MX240, MX480, MX960 with Application Services Modular Line Card on page 551</a> <a href="#">show chassis environment fpc (T320, T640, and T1600 Routers) on page 551</a> <a href="#">show chassis environment fpc (T4000 Router) on page 552</a> <a href="#">show chassis environment fpc lcc (TX Matrix Router) on page 557</a> <a href="#">show chassis environment fpc lcc (TX Matrix Plus Router) on page 558</a> <a href="#">show chassis environment fpc (QFX Series) on page 559</a> <a href="#">show chassis environment fpc interconnect-device (QFabric Systems) on page 559</a> <a href="#">show chassis environment fpc 0 (PTX5000 Packet Transport Switch) on page 560</a> <a href="#">show chassis environment FPC 1 (MX Routers with Media Services Blade [MSB]) on page 561</a>
<b>Output Fields</b>	<p><a href="#">Table 41 on page 538</a> lists the output fields for the <b>show chassis environment fpc</b> command. Output fields are listed in the approximate order in which they appear.</p>



Table 41: show chassis environment fpc Output Fields

Field Name	Field Description
<b>State</b>	<p>Status of the FPC:</p> <ul style="list-style-type: none"> <li>• <b>Unknown</b>—FPC is not detected by the router.</li> <li>• <b>Empty</b>—No FPC is present.</li> <li>• <b>Present</b>—FPC is detected by the chassis daemon but is either not supported by the current version of the Junos OS, or the FPC is coming up but not yet online.</li> <li>• <b>Ready</b>—FPC is in intermediate or transition state.</li> <li>• <b>Announce online</b>—Intermediate state during which the FPC is coming up but not yet online, and the chassis manager acknowledges the chassisd FPC online initiative.</li> <li>• <b>Online</b>—FPC is online and running.</li> <li>• <b>Offline</b>—FPC is powered down.</li> <li>• <b>Diagnostics</b>—FPC is set to operate in diagnostics mode.</li> </ul>
<b>Temperature</b>	(M40e and M160 routers and QFX Series only) Temperature of the air flowing past the FPC.
<b>PMB Temperature</b>	(PTX Series only) Temperature of the air flowing past the PMB (bottom of the FPC).
<b>Temperature Intake</b>	(M320 routers, MX2010 routers, MX2020 routers, and PTX Series only) Temperature of the air flowing into the chassis.
<b>Temperature Top</b>	(T Series routers only) Temperature of the air flowing past the top of the FPC.
<b>Temperature Exhaust</b>	<p>(M120 and M320 routers, MX2010 routers, MX2020 routers, and PTX Series only) Temperature of the air flowing out of the chassis.</p> <p>The PTX Series Packet Transport Switches, and the MX2010 and MX2020 routers include exhaust temperatures for multiple zones (<b>Exhaust A</b> and <b>Exhaust B</b>).</p>
<b>Temperature Bottom</b>	(T Series routers only) Temperature of the air flowing past the bottom of the FPC.
<b>TL <i>n</i> Temperature</b>	(PTX Series only) Temperature of the air flowing past the specified TL area of the packet forwarding engine (PFE) on the FPC.
<b>TQ <i>n</i> Temperature</b>	(PTX Series only) Temperature of the air flowing past the specified TQ area of the packet forwarding engine (PFE) on the FPC.
<b>Temperature MMBO</b>	(T640 router only) Temperature of the air flowing past the type 3 FPC.
<b>Temperature MMB1</b>	(M320 and T Series routers only) Temperature of the air flowing past the type 1, type 2, and type 3 FPC.
<b>Power</b>	Information about the voltage supplied to the FPC. The left column displays the required power, in volts. The right column displays the measured power, in millivolts.
<b>CMB Revision or BUS revision</b>	Revision level of the chassis management bus device (M Series router) or bus (T Series routers).



## Sample Output

show chassis  
environment fpc (M120  
Router)

```
user@host> show chassis environment fpc
FPC 2 status:
  State                               Online
  Temperature Exhaust A               32 degrees C / 89 degrees F
  Temperature Exhaust B               31 degrees C / 87 degrees F
  Power A-Board
    1.2 V                             1202 mV
    1.5 V                             1508 mV
    1.8 V                             1798 mV
    2.5 V                             2507 mV
    3.3 V                             3351 mV
    5.0 V                             4995 mV
    3.3 V bias                         3296 mV
    1.2 V Rocket IO                   1205 mV
    1.5 V Rocket IO                   1501 mV
  I2C Slave Revision                 12
FPC 3 status:
  State                               Online
  Temperature Exhaust A               31 degrees C / 87 degrees F
  Temperature Exhaust B               33 degrees C / 91 degrees F
  Power A-Board
    1.2 V                             1211 mV
    1.5 V                             1501 mV
    1.8 V                             1798 mV
    2.5 V                             2471 mV
    3.3 V                             3293 mV
    5.0 V                             4930 mV
    3.3 V bias                         3296 mV
    1.2 V Rocket IO                   1205 mV
    1.5 V Rocket IO                   1501 mV
  Power B-Board
    1.2 V                             1214 mV
    1.5 V                             1501 mV
    2.5 V                             2471 mV
    3.3 V                             3300 mV
    5.0 V                             4943 mV
    3.3 V bias                         3296 mV
    1.2 V Rocket IO                   1205 mV
    1.5 V Rocket IO                   1501 mV
  I2C Slave Revision                 12
FPC 4 status:
  State                               Online
  Temperature Exhaust A               32 degrees C / 89 degrees F
  Temperature Exhaust B               30 degrees C / 86 degrees F
  Power A-Board
    1.2 V                             1195 mV
    1.5 V                             1504 mV
    1.8 V                             1801 mV
    2.5 V                             2504 mV
    3.3 V                             3293 mV
    5.0 V                             4917 mV
    3.3 V bias                         3296 mV
    1.2 V Rocket IO                   1202 mV
    1.5 V Rocket IO                   1492 mV
  I2C Slave Revision                 12

user@host> show chassis environment fpc
```



**show chassis  
environment fpc (M160  
Router)**

```
FPC 0 status:
State                Online
Temperature          42 degrees C / 107 degrees F
Power:
  1.5 V              1500 mV
  2.5 V              2509 mV
  3.3 V              3308 mV
  5.0 V              4991 mV
  5.0 V bias         4952 mV
  8.0 V bias         8307 mV
CMB Revision         12
FPC 1 status:
State                Online
Temperature          45 degrees C / 113 degrees F
Power:
  1.5 V              1498 mV
  2.5 V              2501 mV
  3.3 V              3319 mV
  5.0 V              5020 mV
  5.0 V bias         5025 mV
  8.0 V bias         8307 mV
CMB Revision         12
```

**show chassis  
environment fpc  
(M320 Router)**

```
user@host> show chassis environment fpc
FPC 0 status:
State                Online
Temperature Intake    27 degrees C / 80 degrees F
Temperature Exhaust   38 degrees C / 100 degrees F
Temperature MMB1      31 degrees C / 87 degrees F
Power:
  1.5 V              1487 mV
  1.5 V *            1494 mV
  1.8 V              1821 mV
  2.5 V              2533 mV
  3.3 V              3323 mV
  5.0 V              5028 mV
  3.3 V bias         3296 mV
  5.0 V bias         4984 mV
CMB Revision         16
FPC 1 status:
State                Online
Temperature Intake    27 degrees C / 80 degrees F
Temperature Exhaust   37 degrees C / 98 degrees F
Temperature MMB1      32 degrees C / 89 degrees F
Power:
  1.5 V              1504 mV
  1.5 V *            1499 mV
  1.8 V              1820 mV
  2.5 V              2529 mV
  3.3 V              3328 mV
  5.0 V              5013 mV
  3.3 V bias         3294 mV
  5.0 V bias         4984 mV
CMB Revision         16
FPC 2 status:
State                Online
Temperature Intake    28 degrees C / 82 degrees F
Temperature Exhaust   38 degrees C / 100 degrees F
Temperature MMB1      32 degrees C / 89 degrees F
Power:
  1.5 V              1498 mV
```



```

1.5 V *          1487 mV
1.8 V           1816 mV
2.5 V           2531 mV
3.3 V           3324 mV
5.0 V           5025 mV
3.3 V bias      3277 mV
5.0 V bias      5013 mV
CMB Revision    17
FPC 3 status:
...

```

**show chassis  
environment fpc  
(MX2020 Router)**

```

user@host> show chassis environment fpc
FPC 0 status:
State          Online
Temperature Intake      41 degrees C / 105 degrees F
Temperature Exhaust A   48 degrees C / 118 degrees F
Temperature Exhaust B   60 degrees C / 140 degrees F
Temperature LU 0 TSen    56 degrees C / 132 degrees F
Temperature LU 0 Chip    59 degrees C / 138 degrees F
Temperature LU 1 TSen    56 degrees C / 132 degrees F
Temperature LU 1 Chip    61 degrees C / 141 degrees F
Temperature LU 2 TSen    56 degrees C / 132 degrees F
Temperature LU 2 Chip    52 degrees C / 125 degrees F
Temperature LU 3 TSen    56 degrees C / 132 degrees F
Temperature LU 3 Chip    52 degrees C / 125 degrees F
Temperature MQ 0 TSen    49 degrees C / 120 degrees F
Temperature MQ 0 Chip    49 degrees C / 120 degrees F
Temperature MQ 1 TSen    49 degrees C / 120 degrees F
Temperature MQ 1 Chip    52 degrees C / 125 degrees F
Temperature MQ 2 TSen    49 degrees C / 120 degrees F
Temperature MQ 2 Chip    45 degrees C / 113 degrees F
Temperature MQ 3 TSen    49 degrees C / 120 degrees F
Temperature MQ 3 Chip    46 degrees C / 114 degrees F
Power
AS-BIAS3V3-z12105      3299 mV
AS-VDD1V8-z12006      1807 mV
AS-VDD2V5-z12006      2512 mV
AS-AVDD1V0-z12004      997 mV
AS-PCIE_1V0-z12004      996 mV
AS-VDD3V3-z12004      3294 mV
AS-VDD_1V5A-z12004     1501 mV
AS-VDD_1V5B-z12004     1498 mV
AS-LU0_1V0-z12004      998 mV
AS-LU1_1V0-z12004     1002 mV
AS-MQ0_1V0-z12004      999 mV
AS-MQ1_1V0-z12004      994 mV
AS-LU2_1V0-z12004     1000 mV
AS-LU3_1V0-z12004      998 mV
AS-MQ2_1V0-z12004     1002 mV
AS-MQ3_1V0-z12004      999 mV
AS-PMB_1V1-z12006     1096 mV
I2C Slave Revision    68
FPC 1 status:
State          Online
Temperature Intake      39 degrees C / 102 degrees F
Temperature Exhaust A   48 degrees C / 118 degrees F
Temperature Exhaust B   55 degrees C / 131 degrees F
Temperature LU 0 TSen    52 degrees C / 125 degrees F
Temperature LU 0 Chip    54 degrees C / 129 degrees F
Temperature LU 1 TSen    52 degrees C / 125 degrees F
Temperature LU 1 Chip    56 degrees C / 132 degrees F

```



```

Temperature LU 2 TSen      52 degrees C / 125 degrees F
Temperature LU 2 Chip      49 degrees C / 120 degrees F
Temperature LU 3 TSen      52 degrees C / 125 degrees F
Temperature LU 3 Chip      50 degrees C / 122 degrees F
Temperature MQ 0 TSen      48 degrees C / 118 degrees F
Temperature MQ 0 Chip      48 degrees C / 118 degrees F
Temperature MQ 1 TSen      48 degrees C / 118 degrees F
Temperature MQ 1 Chip      51 degrees C / 123 degrees F
Temperature MQ 2 TSen      48 degrees C / 118 degrees F
Temperature MQ 2 Chip      45 degrees C / 113 degrees F
Temperature MQ 3 TSen      48 degrees C / 118 degrees F
Temperature MQ 3 Chip      45 degrees C / 113 degrees F
Power
  AS-BIAS3V3-z12105        3291 mV
  AS-VDD1V8-z12006         1786 mV
  AS-VDD2V5-z12006         2496 mV
  AS-AVDD1V0-z12004         1000 mV
  AS-PCIE_1V0-z12004         1000 mV
  AS-VDD3V3-z12004          3294 mV
  AS-VDD_1V5A-z12004         1500 mV
  AS-VDD_1V5B-z12004         1498 mV
  AS-LU0_1V0-z12004          1003 mV
  AS-LU1_1V0-z12004          1000 mV
  AS-MQ0_1V0-z12004          1000 mV
  AS-MQ1_1V0-z12004           995 mV
  AS-LU2_1V0-z12004          1002 mV
  AS-LU3_1V0-z12004           997 mV
  AS-MQ2_1V0-z12004          1000 mV
  AS-MQ3_1V0-z12004           998 mV
  AS-PMB_1V1-z12006          1096 mV
I2C Slave Revision        68
FPC 2 status:
State                      Online
Temperature Intake          39 degrees C / 102 degrees F
Temperature Exhaust A       48 degrees C / 118 degrees F
Temperature Exhaust B       58 degrees C / 136 degrees F
Temperature LU 0 TSen       55 degrees C / 131 degrees F
Temperature LU 0 Chip       57 degrees C / 134 degrees F
Temperature LU 1 TSen       55 degrees C / 131 degrees F
Temperature LU 1 Chip       63 degrees C / 145 degrees F
Temperature LU 2 TSen       55 degrees C / 131 degrees F
Temperature LU 2 Chip       51 degrees C / 123 degrees F
Temperature LU 3 TSen       55 degrees C / 131 degrees F
Temperature LU 3 Chip       52 degrees C / 125 degrees F
Temperature MQ 0 TSen       48 degrees C / 118 degrees F
Temperature MQ 0 Chip       50 degrees C / 122 degrees F
Temperature MQ 1 TSen       48 degrees C / 118 degrees F
Temperature MQ 1 Chip       52 degrees C / 125 degrees F
Temperature MQ 2 TSen       48 degrees C / 118 degrees F
Temperature MQ 2 Chip       47 degrees C / 116 degrees F
Temperature MQ 3 TSen       48 degrees C / 118 degrees F
Temperature MQ 3 Chip       47 degrees C / 116 degrees F
Power
  AS-BIAS3V3-z12105        3299 mV
  AS-VDD1V8-z12006         1805 mV
  AS-VDD2V5-z12006         2510 mV
  AS-AVDD1V0-z12004          999 mV
  AS-PCIE_1V0-z12004          998 mV
  AS-VDD3V3-z12004          3296 mV
  AS-VDD_1V5A-z12004         1492 mV
  AS-VDD_1V5B-z12004         1497 mV

```



```

AS-LU0_1V0-z12004      997 mV
AS-LU1_1V0-z12004      1000 mV
AS-MQ0_1V0-z12004      998 mV
AS-MQ1_1V0-z12004      1001 mV
AS-LU2_1V0-z12004      996 mV
AS-LU3_1V0-z12004      995 mV
AS-MQ2_1V0-z12004      998 mV
AS-MQ3_1V0-z12004      997 mV
AS-PMB_1V1-z12006      1100 mV
I2C Slave Revision     68
FPC 3 status:
State                   Online
Temperature Intake      41 degrees C / 105 degrees F
Temperature Exhaust A   48 degrees C / 118 degrees F
Temperature Exhaust B   58 degrees C / 136 degrees F
Temperature LU 0 TSen    56 degrees C / 132 degrees F
Temperature LU 0 Chip    59 degrees C / 138 degrees F
Temperature LU 1 TSen    56 degrees C / 132 degrees F
Temperature LU 1 Chip    61 degrees C / 141 degrees F
Temperature LU 2 TSen    56 degrees C / 132 degrees F
Temperature LU 2 Chip    51 degrees C / 123 degrees F
Temperature LU 3 TSen    56 degrees C / 132 degrees F
Temperature LU 3 Chip    53 degrees C / 127 degrees F
Temperature MQ 0 TSen    50 degrees C / 122 degrees F
Temperature MQ 0 Chip    51 degrees C / 123 degrees F
Temperature MQ 1 TSen    50 degrees C / 122 degrees F
Temperature MQ 1 Chip    55 degrees C / 131 degrees F
Temperature MQ 2 TSen    50 degrees C / 122 degrees F
Temperature MQ 2 Chip    47 degrees C / 116 degrees F
Temperature MQ 3 TSen    50 degrees C / 122 degrees F
Temperature MQ 3 Chip    50 degrees C / 122 degrees F
Power
AS-BIAS3V3-z12105      3305 mV
AS-VDD1V8-z12006      1810 mV
AS-VDD2V5-z12006      2508 mV
AS-AVDD1V0-z12004      999 mV
AS-PCIE_1V0-z12004     1001 mV
AS-VDD3V3-z12004      3294 mV
AS-VDD_1V5A-z12004     1500 mV
AS-VDD_1V5B-z12004     1498 mV
AS-LU0_1V0-z12004      998 mV
AS-LU1_1V0-z12004      998 mV
AS-MQ0_1V0-z12004      999 mV
AS-MQ1_1V0-z12004      998 mV
AS-LU2_1V0-z12004      1000 mV
AS-LU3_1V0-z12004      1001 mV
AS-MQ2_1V0-z12004      996 mV
AS-MQ3_1V0-z12004      998 mV
AS-PMB_1V1-z12006      1098 mV
I2C Slave Revision     68
FPC 4 status:
...

```

**show chassis  
environment fpc  
(MX2010 Router)**

```

user@host> show chassis environment fpc
FPC 0 status:
State                   Online
Temperature Intake      36 degrees C / 96 degrees F
Temperature Exhaust A   42 degrees C / 107 degrees F
Temperature Exhaust B   51 degrees C / 123 degrees F
Temperature LU 0 TSen    49 degrees C / 120 degrees F
Temperature LU 0 Chip    50 degrees C / 122 degrees F

```



```

Temperature LU 1 TSen      49 degrees C / 120 degrees F
Temperature LU 1 Chip      54 degrees C / 129 degrees F
Temperature LU 2 TSen      49 degrees C / 120 degrees F
Temperature LU 2 Chip      45 degrees C / 113 degrees F
Temperature LU 3 TSen      49 degrees C / 120 degrees F
Temperature LU 3 Chip      46 degrees C / 114 degrees F
Temperature MQ 0 TSen      40 degrees C / 104 degrees F
Temperature MQ 0 Chip      41 degrees C / 105 degrees F
Temperature MQ 1 TSen      40 degrees C / 104 degrees F
Temperature MQ 1 Chip      44 degrees C / 111 degrees F
Temperature MQ 2 TSen      40 degrees C / 104 degrees F
Temperature MQ 2 Chip      38 degrees C / 100 degrees F
Temperature MQ 3 TSen      40 degrees C / 104 degrees F
Temperature MQ 3 Chip      41 degrees C / 105 degrees F
Power
  AS-BIAS3V3-z12105      3300 mV
  AS-VDD1V8-z12006      1805 mV
  AS-VDD2V5-z12006      2505 mV
  AS-AVDD1V0-z12004      998 mV
  AS-PCIE_1V0-z12004      999 mV
  AS-VDD3V3-z12004      3303 mV
  AS-VDD_1V5A-z12004      1497 mV
  AS-VDD_1V5B-z12004      1497 mV
  AS-LU0_1V0-z12004      998 mV
  AS-LU1_1V0-z12004      1003 mV
  AS-MQ0_1V0-z12004      998 mV
  AS-MQ1_1V0-z12004      998 mV
  AS-LU2_1V0-z12004      997 mV
  AS-LU3_1V0-z12004      1001 mV
  AS-MQ2_1V0-z12004      996 mV
  AS-MQ3_1V0-z12004      994 mV
  AS-PMB_1V1-z12006      1097 mV
I2C Slave Revision      68
FPC 1 status:
  State      Online
  Temperature Intake      34 degrees C / 93 degrees F
  Temperature Exhaust A    46 degrees C / 114 degrees F
  Temperature Exhaust B    54 degrees C / 129 degrees F
  Temperature LU 0 TSen    45 degrees C / 113 degrees F
  Temperature LU 0 Chip    55 degrees C / 131 degrees F
  Temperature LU 1 TSen    45 degrees C / 113 degrees F
  Temperature LU 1 Chip    44 degrees C / 111 degrees F
  Temperature LU 2 TSen    45 degrees C / 113 degrees F
  Temperature LU 2 Chip    50 degrees C / 122 degrees F
  Temperature LU 3 TSen    45 degrees C / 113 degrees F
  Temperature LU 3 Chip    58 degrees C / 136 degrees F
  Temperature XM 0 TSen    45 degrees C / 113 degrees F
  Temperature XM 0 Chip    51 degrees C / 123 degrees F
  Temperature XF 0 TSen    45 degrees C / 113 degrees F
  Temperature XF 0 Chip    63 degrees C / 145 degrees F
  Temperature PLX Switch TSen 45 degrees C / 113 degrees F
  Temperature PLX Switch Chip 47 degrees C / 116 degrees F
Power
  MPC-BIAS3V3-z12105      3300 mV
  MPC-VDD3V3-z16100      3294 mV
  MPC-VDD2V5-z16100      2505 mV
  MPC-VDD1V8-z12004      1796 mV
  MPC-AVDD1V0-z12004      991 mV
  MPC-VDD1V2-z16100      1196 mV
  MPC-VDD1V5A-z12004      1491 mV
  MPC-VDD1V5B-z12004      1492 mV

```



```

MPC-XF_0V9-z12004          996 mV
MPC-PCIE_1V0-z16100        1003 mV
MPC-LU0_1V0-z12004         996 mV
MPC-LU1_1V0-z12004         996 mV
MPC-LU2_1V0-z12004         998 mV
MPC-LU3_1V0-z12004         994 mV
MPC-12VA-BMR453            12031 mV
MPC-12VB-BMR453            12003 mV
MPC-PMB_1V1-z12006         1104 mV
MPC-PMB_1V2-z12106         1194 mV
MPC-XM_0V9-vt273m          911 mV
I2C Slave Revision         110
FPC 8 status:
State                       Online
Temperature Intake          32 degrees C / 89 degrees F
Temperature Exhaust A       44 degrees C / 111 degrees F
Temperature Exhaust B       37 degrees C / 98 degrees F
Temperature LU 0 TCAM TSen  41 degrees C / 105 degrees F
Temperature LU 0 TCAM Chip  49 degrees C / 120 degrees F
Temperature LU 0 TSen        41 degrees C / 105 degrees F
Temperature LU 0 Chip        52 degrees C / 125 degrees F
Temperature MQ 0 TSen        41 degrees C / 105 degrees F
Temperature MQ 0 Chip        47 degrees C / 116 degrees F
Temperature LU 1 TCAM TSen  39 degrees C / 102 degrees F
Temperature LU 1 TCAM Chip  42 degrees C / 107 degrees F
Temperature LU 1 TSen        39 degrees C / 102 degrees F
Temperature LU 1 Chip        46 degrees C / 114 degrees F
Temperature MQ 1 TSen        39 degrees C / 102 degrees F
Temperature MQ 1 Chip        45 degrees C / 113 degrees F
Power
MPC-BIAS3V3-z12105         3296 mV
MPC-VDD3V3-z12006         3298 mV
MPC-VDD2V5-z12006         2505 mV
MPC-TCAM_1V0-z12004        997 mV
MPC-AVDD1V0-z12006        1007 mV
MPC-VDD1V8-z12006         1803 mV
MPC-PCIE_1V0-z12006        1004 mV
MPC-LU0_1V0-z12004        1000 mV
MPC-MQ0_1V0-z12004         999 mV
MPC-VDD_1V5-z12004        1498 mV
MPC-PMB_1V1-z12006         1102 mV
MPC-9VA-BMR453             9009 mV
MPC-9VB-BMR453             8960 mV
MPC-PMB_1V2-z12105         1202 mV
MPC-LU1_1V0-z12004        1005 mV
MPC-MQ1_1V0-z12004        1000 mV
I2C Slave Revision         70
FPC 9 status:
State                       Online
Temperature Intake          34 degrees C / 93 degrees F
Temperature Exhaust A       41 degrees C / 105 degrees F
Temperature Exhaust B       54 degrees C / 129 degrees F
Temperature LU 0 TSen       51 degrees C / 123 degrees F
Temperature LU 0 Chip       52 degrees C / 125 degrees F
Temperature LU 1 TSen       51 degrees C / 123 degrees F
Temperature LU 1 Chip       55 degrees C / 131 degrees F
Temperature LU 2 TSen       51 degrees C / 123 degrees F
Temperature LU 2 Chip       47 degrees C / 116 degrees F
Temperature LU 3 TSen       51 degrees C / 123 degrees F
Temperature LU 3 Chip       47 degrees C / 116 degrees F
Temperature MQ 0 TSen       40 degrees C / 104 degrees F

```



```

Temperature MQ 0 Chip      42 degrees C / 107 degrees F
Temperature MQ 1 TSen      40 degrees C / 104 degrees F
Temperature MQ 1 Chip      44 degrees C / 111 degrees F
Temperature MQ 2 TSen      40 degrees C / 104 degrees F
Temperature MQ 2 Chip      38 degrees C / 100 degrees F
Temperature MQ 3 TSen      40 degrees C / 104 degrees F
Temperature MQ 3 Chip      40 degrees C / 104 degrees F
Power
  AS-BIAS3V3-z12105        3302 mV
  AS-VDD1V8-z12006         1808 mV
  AS-VDD2V5-z12006         2513 mV
  AS-AVDD1V0-z12004         997 mV
  AS-PCIE_1V0-z12004         999 mV
  AS-VDD3V3-z12004         3294 mV
  AS-VDD_1V5A-z12004        1503 mV
  AS-VDD_1V5B-z12004        1502 mV
  AS-LU0_1V0-z12004         996 mV
  AS-LU1_1V0-z12004         999 mV
  AS-MQ0_1V0-z12004         997 mV
  AS-MQ1_1V0-z12004         999 mV
  AS-LU2_1V0-z12004         997 mV
  AS-LU3_1V0-z12004         998 mV
  AS-MQ2_1V0-z12004        1000 mV
  AS-MQ3_1V0-z12004        1000 mV
  AS-PMB_1V1-z12006        1102 mV
I2C Slave Revision        68

```

**show chassis  
environment fpc  
(MX240 Router)**

```

user@host> show chassis environment fpc
FPC 1 status:
  State      Online
  Temperature Intake      34 degrees C / 93 degrees F
  Temperature Exhaust A   39 degrees C / 102 degrees F
  Temperature Exhaust B   53 degrees C / 127 degrees F
  Temperature I3 0 TSensor 51 degrees C / 123 degrees F
  Temperature I3 0 Chip   54 degrees C / 129 degrees F
  Temperature I3 1 TSensor 50 degrees C / 122 degrees F
  Temperature I3 1 Chip   53 degrees C / 127 degrees F
  Temperature I3 2 TSensor 48 degrees C / 118 degrees F
  Temperature I3 2 Chip   51 degrees C / 123 degrees F
  Temperature I3 3 TSensor 45 degrees C / 113 degrees F
  Temperature I3 3 Chip   48 degrees C / 118 degrees F
  Temperature IA 0 TSensor 45 degrees C / 113 degrees F
  Temperature IA 0 Chip   45 degrees C / 113 degrees F
  Temperature IA 1 TSensor 45 degrees C / 113 degrees F
  Temperature IA 1 Chip   49 degrees C / 120 degrees F
  Power
    1.5 V      1492 mV
    2.5 V      2507 mV
    3.3 V      3306 mV
    1.8 V PFE 0 1801 mV
    1.8 V PFE 1 1804 mV
    1.8 V PFE 2 1798 mV
    1.8 V PFE 3 1798 mV
    1.2 V PFE 0 1169 mV
    1.2 V PFE 1 1189 mV
    1.2 V PFE 2 1182 mV
    1.2 V PFE 3 1176 mV
  I2C Slave Revision      42
FPC 2 status:
  State      Online
  Temperature Intake      33 degrees C / 91 degrees F

```



```

Temperature Exhaust A      41 degrees C / 105 degrees F
Temperature Exhaust B      53 degrees C / 127 degrees F
Temperature I3 0 TSensor   53 degrees C / 127 degrees F
Temperature I3 0 Chip       58 degrees C / 136 degrees F
Temperature I3 1 TSensor   52 degrees C / 125 degrees F
Temperature I3 1 Chip       56 degrees C / 132 degrees F
Temperature I3 2 TSensor   50 degrees C / 122 degrees F
Temperature I3 2 Chip       52 degrees C / 125 degrees F
Temperature I3 3 TSensor   46 degrees C / 114 degrees F
Temperature I3 3 Chip       49 degrees C / 120 degrees F
Temperature IA 0 TSensor   51 degrees C / 123 degrees F
Temperature IA 0 Chip       49 degrees C / 120 degrees F
Temperature IA 1 TSensor   48 degrees C / 118 degrees F
Temperature IA 1 Chip       53 degrees C / 127 degrees F
Power
  1.5 V                      1492 mV
  2.5 V                      2445 mV
  3.3 V                      3293 mV
  1.8 V PFE 0                1827 mV
  1.8 V PFE 1                1775 mV
  1.8 V PFE 2                1788 mV
  1.8 V PFE 3                1798 mV
  1.2 V PFE 0                1250 mV
  1.2 V PFE 1                1234 mV
  1.2 V PFE 2                1231 mV
  1.2 V PFE 3                1192 mV
I2C Slave Revision          42

```

**show chassis  
environment fpc  
(MX480 Router)**

```

user@host> show chassis environment fpc
FPC 1 status:
State                      Online
Temperature Intake          36 degrees C / 96 degrees F
Temperature Exhaust A       41 degrees C / 105 degrees F
Temperature Exhaust B       55 degrees C / 131 degrees F
Temperature I3 0 TSensor    55 degrees C / 131 degrees F
Temperature I3 0 Chip        57 degrees C / 134 degrees F
Temperature I3 1 TSensor    53 degrees C / 127 degrees F
Temperature I3 1 Chip        53 degrees C / 127 degrees F
Temperature I3 2 TSensor    52 degrees C / 125 degrees F
Temperature I3 2 Chip        49 degrees C / 120 degrees F
Temperature I3 3 TSensor    47 degrees C / 116 degrees F
Temperature I3 3 Chip        47 degrees C / 116 degrees F
Temperature IA 0 TSensor    54 degrees C / 129 degrees F
Temperature IA 0 Chip        58 degrees C / 136 degrees F
Temperature IA 1 TSensor    48 degrees C / 118 degrees F
Temperature IA 1 Chip        53 degrees C / 127 degrees F
Power
  1.5 V                      1479 mV
  2.5 V                      2542 mV
  3.3 V                      3319 mV
  1.8 V PFE 0                1811 mV
  1.8 V PFE 1                1804 mV
  1.8 V PFE 2                1804 mV
  1.8 V PFE 3                1814 mV
  1.2 V PFE 0                1192 mV
  1.2 V PFE 1                1202 mV
  1.2 V PFE 2                1205 mV
  1.2 V PFE 3                1189 mV
I2C Slave Revision          40

```



**show chassis  
environment fpc  
(MX960 Router)**

```

user@host> show chassis environment fpc
FPC 5 status:
State                               Online
Temperature Intake                  27 degrees C / 80 degrees F
Temperature Exhaust A               34 degrees C / 93 degrees F
Temperature Exhaust B               40 degrees C / 104 degrees F
Temperature I3 0 TSensor            39 degrees C / 102 degrees F
Temperature I3 0 Chip               41 degrees C / 105 degrees F
Temperature I3 1 TSensor            38 degrees C / 100 degrees F
Temperature I3 1 Chip               37 degrees C / 98 degrees F
Temperature I3 2 TSensor            37 degrees C / 98 degrees F
Temperature I3 2 Chip               34 degrees C / 93 degrees F
Temperature I3 3 TSensor            32 degrees C / 89 degrees F
Temperature I3 3 Chip               33 degrees C / 91 degrees F
Temperature IA 0 TSensor            39 degrees C / 102 degrees F
Temperature IA 0 Chip               44 degrees C / 111 degrees F
Temperature IA 1 TSensor            36 degrees C / 96 degrees F
Temperature IA 1 Chip               44 degrees C / 111 degrees F
Power
  1.5 V                             1479 mV
  2.5 V                             2523 mV
  3.3 V                             3254 mV
  1.8 V PFE 0                       1798 mV
  1.8 V PFE 1                       1798 mV
  1.8 V PFE 2                       1807 mV
  1.8 V PFE 3                       1791 mV
  1.2 V PFE 0                       1173 mV
  1.2 V PFE 1                       1179 mV
  1.2 V PFE 2                       1179 mV
  1.2 V PFE 3                       1185 mV
I2C Slave Revision                  6
FPC 6 status:
State                               Online
Temperature Intake                  25 degrees C / 77 degrees F
Temperature Exhaust A               38 degrees C / 100 degrees F
Temperature Exhaust B               38 degrees C / 100 degrees F
Temperature I3 0 TSensor            40 degrees C / 104 degrees F
Temperature I3 0 Chip               40 degrees C / 104 degrees F
Temperature I3 1 TSensor            40 degrees C / 104 degrees F
Temperature I3 1 Chip               38 degrees C / 100 degrees F
Temperature I3 2 TSensor            37 degrees C / 98 degrees F
Temperature I3 2 Chip               32 degrees C / 89 degrees F
Temperature I3 3 TSensor            34 degrees C / 93 degrees F
Temperature I3 3 Chip               33 degrees C / 91 degrees F
Temperature IA 0 TSensor            45 degrees C / 113 degrees F
Temperature IA 0 Chip               47 degrees C / 116 degrees F
Temperature IA 1 TSensor            37 degrees C / 98 degrees F
Temperature IA 1 Chip               42 degrees C / 107 degrees F
Power
  1.5 V                             1485 mV
  2.5 V                             2510 mV
  3.3 V                             3332 mV
  1.8 V PFE 0                       1801 mV
  1.8 V PFE 1                       1814 mV
  1.8 V PFE 2                       1804 mV
  1.8 V PFE 3                       1820 mV
  1.2 V PFE 0                       1192 mV
  1.2 V PFE 1                       1189 mV
  1.2 V PFE 2                       1202 mV
  1.2 V PFE 3                       1156 mV
I2C Slave Revision                  40

```



show chassis  
environment fpc  
(MX480 Router with

```
user@host> show chassis environment fpc
FPC 0 status:
  State           Online
  Temperature Intake 32 degrees C / 89 degrees F
```



100-Gigabit Ethernet  
CFP)

Temperature Exhaust A	39 degrees C / 102 degrees F
Temperature Exhaust B	37 degrees C / 98 degrees F
Temperature QX 0 TSen	44 degrees C / 111 degrees F
Temperature QX 0 Chip	48 degrees C / 118 degrees F
Temperature LU 0 TCAM TSen	44 degrees C / 111 degrees F
Temperature LU 0 TCAM Chip	47 degrees C / 116 degrees F
Temperature LU 0 TSen	44 degrees C / 111 degrees F
Temperature LU 0 Chip	48 degrees C / 118 degrees F
Temperature MQ 0 TSen	44 degrees C / 111 degrees F
Temperature MQ 0 Chip	47 degrees C / 116 degrees F
Power	
MPC-BIAS3V3-z12105	3297 mV
MPC-VDD3V3-z12105	3306 mV
MPC-VDD2V5-z12105	2498 mV
MPC-TCAM_1V0-z12004	999 mV
MPC-AVDD1V0-z12006	999 mV
MPC-VDD1V8-z12006	1796 mV
MPC-PCIE_1V0-z12006	1002 mV
MPC-LU0_1V0-z12004	997 mV
MPC-MQ0_1V0-z12004	995 mV
MPC-VDD_1V5-z12004	1496 mV
MPC-PMB_1V1-z12006	1094 mV
MPC-9VA-BMR453	9054 mV
MPC-9VB-BMR453	9037 mV
MPC-PMB_1V2-z12106	1191 mV
MPC-QXM0_1V0-z12006	1000 mV
I2C Slave Revision	66
FPC 1 status:	
State	Online
Temperature Intake	35 degrees C / 95 degrees F
Temperature Exhaust A	50 degrees C / 122 degrees F
Temperature Exhaust B	56 degrees C / 132 degrees F
Temperature LU 0 TSen	46 degrees C / 114 degrees F
Temperature LU 0 Chip	59 degrees C / 138 degrees F
Temperature LU 1 TSen	46 degrees C / 114 degrees F
Temperature LU 1 Chip	45 degrees C / 113 degrees F
Temperature LU 2 TSen	46 degrees C / 114 degrees F
Temperature LU 2 Chip	60 degrees C / 140 degrees F
Temperature LU 3 TSen	46 degrees C / 114 degrees F
Temperature LU 3 Chip	71 degrees C / 159 degrees F
Temperature XM 0 TSen	46 degrees C / 114 degrees F
Temperature XM 0 Chip	-18 degrees C / 0 degrees F
Temperature XF 0 TSen	46 degrees C / 114 degrees F
Temperature XF 0 Chip	76 degrees C / 168 degrees F
Power	
MPC-BIAS3V3-z12105	3292 mV
MPC-VDD3V3-z16100	3303 mV
MPC-VDD2V5-z16100	2501 mV
MPC-VDD1V8-z12004	1801 mV
MPC-AVDD1V0-z12006	996 mV
MPC-VDD1V2-z16100	1199 mV
MPC-VDD1V5A-z12004	1493 mV
MPC-VDD1V5B-z12004	1498 mV
MPC-XF_0V9-z12006	996 mV
MPC-PCIE_1V0-z16100	1000 mV
MPC-LU0_1V0-z12004	994 mV
MPC-LU1_1V0-z12004	994 mV
MPC-LU2_1V0-z12004	992 mV
MPC-LU3_1V0-z12004	993 mV
MPC-12VA-BMR453	12003 mV
MPC-12VB-BMR453	12043 mV



MPC-PMB_1V1-z12006	1091 mV
MPC-PMB_1V2-z12106	1196 mV
MPC-XM_0V9-vt273m	899 mV
I2C Slave Revision	106

show chassis  
environment fpc  
(MX240, MX480,  
MX960 with  
Application Services  
Modular Line Card

```
user@host>show chassis environment fpc 1
```

FPC 1 status:

State	Online
Temperature Intake	36 degrees C / 96 degrees F
Temperature Exhaust A	39 degrees C / 102 degrees F
Temperature LU TSen	52 degrees C / 125 degrees F
Temperature LU Chip	54 degrees C / 129 degrees F
Temperature XM TSen	52 degrees C / 125 degrees F
Temperature XM Chip	60 degrees C / 140 degrees F
Temperature PCIE TSen	52 degrees C / 125 degrees F
Temperature PCIE Chip	69 degrees C / 156 degrees F
Power	
MPC-BIAS3V3-z12106	3302 mV
MPC-VDD3V3-z16100	3325 mV
MPC-AVDD1V0-z16100	1007 mV
MPC-PCIE_1V0-z16100	904 mV
MPC-LU0_1V0-z12004	996 mV
MPC-VDD_1V5-z12004	1498 mV
MPC-12VA-BMR453	11733 mV
MPC-12VB-BMR453	11728 mV
MPC-XM_0V9-vt273m	900 mV
I2C Slave Revision	81

show chassis  
environment fpc

```
user@host> show chassis environment fpc
```

FPC 0 status:

State	Online
-------	--------



**(T320, T640, and T1600 Routers)**

```

Temperature Top           42 degrees C / 107 degrees F
Temperature Bottom        36 degrees C / 96 degrees F
Temperature MMB1          39 degrees C / 102 degrees F
Power:
  1.8 V                   1959 mV
  2.5 V                   2495 mV
  3.3 V                   3344 mV
  5.0 V                   5047 mV
  1.8 V bias              1787 mV
  3.3 V bias              3291 mV
  5.0 V bias              4998 mV
  8.0 V bias              7343 mV
BUS Revision              40
FPC 1 status:
State                     Online
Temperature Top           42 degrees C / 107 degrees F
Temperature Bottom        39 degrees C / 102 degrees F
Temperature MMB1          40 degrees C / 104 degrees F
Power:
  1.8 V                   1956 mV
  2.5 V                   2498 mV
  3.3 V                   3340 mV
  5.0 V                   5023 mV
  1.8 V bias              1782 mV
  3.3 V bias              3277 mV
  5.0 V bias              4989 mV
  8.0 V bias              7289 mV
BUS Revision              40
FPC 2 status:
State                     Online
Temperature Top           43 degrees C / 109 degrees F
Temperature Bottom        39 degrees C / 102 degrees F
Temperature MMB1          41 degrees C / 105 degrees F
Power:
  1.8 V                   1963 mV
  2.5 V                   2503 mV
  3.3 V                   3340 mV
  5.0 V                   5042 mV
  1.8 V bias              1797 mV
  3.3 V bias              3311 mV
  5.0 V bias              5013 mV
  8.0 V bias              7221 mV
BUS Revision              40

```

**show chassis  
environment fpc  
(T4000 Router)**

```

user@host> show chassis environment fpc
FPC 0 status:
State                     Online
Fan Intake                34 degrees C / 93 degrees F
Fan Exhaust               48 degrees C / 118 degrees F
PMB                       47 degrees C / 116 degrees F
LMB0                      50 degrees C / 122 degrees F
LMB1                      41 degrees C / 105 degrees F
LMB2                      35 degrees C / 95 degrees F
PFE1 LU2                  46 degrees C / 114 degrees F
PFE1 LU0                  41 degrees C / 105 degrees F
PFE0 LU0                  57 degrees C / 134 degrees F
XF1                       47 degrees C / 116 degrees F
XF0                       52 degrees C / 125 degrees F
XM1                       41 degrees C / 105 degrees F
XM0                       50 degrees C / 122 degrees F
PFE0 LU1                  56 degrees C / 132 degrees F

```



PFE0 LU2	45 degrees C / 113 degrees F
PFE1 LU1	37 degrees C / 98 degrees F
Power 1	
1.0 V	991 mV
1.2 V bias	1195 mV
1.8 V	1788 mV
2.5 V	2483 mV
3.3 V	3289 mV
3.3 V bias	3299 mV
12.0 V A	10608 mV
12.0 V B	10637 mV
Power 2	
0.9 V	881 mV
0.9 V PFE0	916 mV
0.9 V PFE1	903 mV
1.0 V PFE0	1012 mV
1.0 V PFE1	1002 mV
1.1 V	1095 mV
1.5 V_0	1494 mV
1.5 V_1	1479 mV
Power 3	
1.0 V PFE0	1000 mV
1.0 V PFE1	1002 mV
1.0 V PFE0 *	995 mV
1.0 V PFE1 *	995 mV
1.8 V PFE 0	1788 mV
1.8 V PFE 1	1789 mV
2.5 V	2482 mV
12.0 V	11614 mV
Power 4	
1.0 V PFE0 LU0	1003 mV
1.0 V PFE1 LU0	1003 mV
1.0 V PFE1 LU2	1004 mV
1.0 V PFE0 LU0 *	995 mV
1.0 V PFE1 LU0 *	998 mV
1.0 V PFE1 LU2 *	996 mV
12.0 V	11643 mV
12.0 V C	11711 mV
Power (Base/PMB/MMB)	
LMB0 VDD2V5	2488 mV
LMB0 VDD1V8	1788 mV
LMB0 VDD1V5	1496 mV
LMB0 PFE0 LU0 AVDD1V0	1002 mV
LMB0 PFE0 LU0 VDD1V0	1000 mV
LMB0 VDD12V0	10752 mV
LMB1 VDD2V5	2472 mV
LMB1 VDD1V8	1792 mV
LMB1 VDD1V5	1480 mV
LMB1 PFE0 LU2 AVDD1V0	994 mV
LMB1 PFE0 LU2 VDD1V0	1002 mV
LMB1 VDD12V0	10800 mV
LMB2 VDD2V5	2472 mV
LMB2 VDD1V8	1792 mV
LMB2 VDD1V5	1486 mV
LMB2 PFE1 LU1 AVDD1V0	996 mV
LMB2 PFE1 LU1 VDD1V0	998 mV
LMB2 VDD12V0	10704 mV
PMB 1.05v	1049 mV
PMB 1.5v	1500 mV
PMB 2.5v	2500 mV
PMB 3.3v	3299 mV



```

Bus Revision                               113
FPC 3 status:
State                                     Online
Fan Intake                               37 degrees C / 98 degrees F
Fan Exhaust                              51 degrees C / 123 degrees F
PMB                                      43 degrees C / 109 degrees F
LMB0                                    57 degrees C / 134 degrees F
LMB1                                    54 degrees C / 129 degrees F
LMB2                                    38 degrees C / 100 degrees F
PFE1 LU2                                63 degrees C / 145 degrees F
PFE1 LU0                                45 degrees C / 113 degrees F
PFE0 LU0                                69 degrees C / 156 degrees F
XF1                                     62 degrees C / 143 degrees F
XF0                                     63 degrees C / 145 degrees F
XM1                                     43 degrees C / 109 degrees F
XM0                                     67 degrees C / 152 degrees F
PFE0 LU1                                63 degrees C / 145 degrees F
PFE0 LU2                                66 degrees C / 150 degrees F
PFE1 LU1                                41 degrees C / 105 degrees F

Power 1
  1.0 V                                  1002 mV
  1.2 V bias                             1201 mV
  1.8 V                                  1785 mV
  2.5 V                                  2485 mV
  3.3 V                                  3288 mV
  3.3 V bias                             3285 mV
  12.0 V A                               10412 mV
  12.0 V B                               10515 mV

Power 2
  0.9 V                                  882 mV
  0.9 V PFE0                             920 mV
  0.9 V PFE1                             905 mV
  1.0 V PFE0                             1015 mV
  1.0 V PFE1                             1001 mV
  1.1 V                                  1094 mV
  1.5 V_0                                1495 mV
  1.5 V_1                                1478 mV

Power 3
  0.92 V PFE1                             998 mV
  1.0 V PFE0                             997 mV
  1.0 V PFE0 *                             992 mV
  1.0 V PFE1 *                             991 mV
  1.8 V PFE 0                             1780 mV
  1.8 V PFE 1                             1797 mV
  2.5 V                                  2492 mV
  12.0 V                                  11604 mV

Power 4
  1.0 V PFE0 LU0                           1003 mV
  1.0 V PFE1 LU0                           1004 mV
  1.0 V PFE1 LU2                           1003 mV
  1.0 V PFE0 LU0 *                         1000 mV
  1.0 V PFE1 LU0 *                         1001 mV
  1.0 V PFE1 LU2 *                         1003 mV
  12.0 V                                  11653 mV
  12.0 V C                                  11672 mV

Power (Base/PMB/MMB)
  LMB0 VDD2V5                             2512 mV
  LMB0 VDD1V8                             1790 mV
  LMB0 VDD1V5                             1500 mV
  LMB0 PFE0 LU0 AVDD1V0                   1004 mV
  LMB0 PFE0 LU0 VDD1V0                    1002 mV

```



LMB0 VDD12V0	10608 mV
LMB1 VDD2V5	2472 mV
LMB1 VDD1V8	1788 mV
LMB1 VDD1V5	1480 mV
LMB1 PFE0 LU2 AVDD1V0	1000 mV
LMB1 PFE0 LU2 VDD1V0	1004 mV
LMB1 VDD12V0	10672 mV
LMB2 VDD2V5	2488 mV
LMB2 VDD1V8	1798 mV
LMB2 VDD1V5	1494 mV
LMB2 PFE1 LU1 AVDD1V0	1000 mV
LMB2 PFE1 LU1 VDD1V0	1004 mV
LMB2 VDD12V0	10528 mV
PMB 1.05v	1050 mV
PMB 1.5v	1500 mV
PMB 2.5v	2499 mV
PMB 3.3v	3299 mV
Bus Revision	113
FPC 5 status:	
State	Online
Temperature Top	39 degrees C / 102 degrees F
Temperature Bottom	38 degrees C / 100 degrees F
Power	
1.8 V	1804 mV
1.8 V bias	1802 mV
3.3 V	3294 mV
3.3 V bias	3277 mV
5.0 V bias	5008 mV
5.0 V TOP	5067 mV
8.0 V bias	6642 mV
Power (Base/PMB/MMB)	
1.2 V	1202 mV
1.5 V	1504 mV
5.0 V BOT	5079 mV
12.0 V TOP Base	11848 mV
12.0 V BOT Base	11780 mV
1.1 V PMB	1111 mV
1.2 V PMB	1189 mV
1.5 V PMB	1494 mV
1.8 V PMB	1819 mV
2.5 V PMB	2503 mV
3.3 V PMB	3294 mV
5.0 V PMB	5035 mV
12.0 V PMB	11788 mV
0.75 MMB TOP	766 mV
1.5 V MMB TOP	1484 mV
1.8 V MMB TOP	1772 mV
2.5 V MMB TOP	2485 mV
1.2 V MMB TOP	1137 mV
5.0 V MMB TOP	4946 mV
12.0 V MMB TOP	11772 mV
3.3 V MMB TOP	3289 mV
0.75 MMB BOT	759 mV
1.5 V MMB BOT	1482 mV
1.8 V MMB BOT	1792 mV
2.5 V MMB BOT	2490 mV
1.2 V MMB BOT	1145 mV
5.0 V MMB BOT	4922 mV
12.0 V MMB BOT	11625 mV
3.3 V MMB BOT	3282 mV
APS 00	2495 mV



```

APS 01                3308 mV
APS 02                3301 mV
5.0 V PIC 0           4967 mV
APS 10                2512 mV
APS 11                3316 mV
APS 12                3304 mV
5.0 V PIC 1           5081 mV
Bus Revision          49
FPC 6 status:
State                 Online
Fan Intake             34 degrees C / 93 degrees F
Fan Exhaust            49 degrees C / 120 degrees F
PMB                    40 degrees C / 104 degrees F
LMB0                   60 degrees C / 140 degrees F
LMB1                   58 degrees C / 136 degrees F
LMB2                   40 degrees C / 104 degrees F
PFE1 LU2              69 degrees C / 156 degrees F
PFE1 LU0              45 degrees C / 113 degrees F
PFE0 LU0              71 degrees C / 159 degrees F
XF1                   58 degrees C / 136 degrees F
XF0                   65 degrees C / 149 degrees F
XM1                   40 degrees C / 104 degrees F
XM0                   66 degrees C / 150 degrees F
PFE0 LU1              69 degrees C / 156 degrees F
PFE0 LU2              68 degrees C / 154 degrees F
PFE1 LU1              42 degrees C / 107 degrees F
Power 1
1.0 V                 998 mV
1.2 V bias            1191 mV
1.8 V                 1781 mV
2.5 V                 2487 mV
3.3 V                 3302 mV
3.3 V bias            3300 mV
12.0 V A              10388 mV
12.0 V B              10388 mV
Power 2
0.9 V                 902 mV
0.9 V PFE0            921 mV
0.9 V PFE1            907 mV
1.0 V PFE0            996 mV
1.0 V PFE1            974 mV
1.1 V                 1095 mV
1.5 V_0               1495 mV
1.5 V_1               1478 mV
Power 3
1.0 V PFE0            997 mV
1.0 V PFE1            998 mV
1.0 V PFE0 *          993 mV
1.0 V PFE1 *          991 mV
1.8 V PFE 0           1796 mV
1.8 V PFE 1           1789 mV
2.5 V                 2465 mV
12.0 V                11609 mV
Power 4
1.0 V PFE0 LU0        1003 mV
1.0 V PFE1 LU0        1006 mV
1.0 V PFE1 LU2        1002 mV
1.0 V PFE0 LU0 *      1000 mV
1.0 V PFE1 LU0 *      998 mV
1.0 V PFE1 LU2 *      998 mV
12.0 V                11638 mV

```



```

12.0 V C 11702 mV
Power (Base/PMB/MMB)
LMB0 VDD2V5 2484 mV
LMB0 VDD1V8 1780 mV
LMB0 VDD1V5 1496 mV
LMB0 PFE0 LU0 AVDD1V0 998 mV
LMB0 PFE0 LU0 VDD1V0 1004 mV
LMB0 VDD12V0 10528 mV
LMB1 VDD2V5 2472 mV
LMB1 VDD1V8 1776 mV
LMB1 VDD1V5 1474 mV
LMB1 PFE0 LU2 AVDD1V0 994 mV
LMB1 PFE0 LU2 VDD1V0 1004 mV
LMB1 VDD12V0 10544 mV
LMB2 VDD2V5 2476 mV
LMB2 VDD1V8 1790 mV
LMB2 VDD1V5 1492 mV
LMB2 PFE1 LU1 AVDD1V0 996 mV
LMB2 PFE1 LU1 VDD1V0 1010 mV
LMB2 VDD12V0 10528 mV
PMB 1.05v 1050 mV
PMB 1.5v 1499 mV
PMB 2.5v 2500 mV
PMB 3.3v 3300 mV
Bus Revision 80

```

show chassis  
environment fpc lcc 0  
(TX Matrix Router)

```

user@host> show chassis environment fpc lcc 0
lcc0-re0:

```

```

-----
FPC 1 status:

```

```

State Online
Temperature Top 30 degrees C / 86 degrees F
Temperature Bottom 25 degrees C / 77 degrees F
Temperature MMB0 Absent
Temperature MMB1 27 degrees C / 80 degrees F
Power:
1.8 V 1813 mV
2.5 V 2504 mV
3.3 V 3338 mV
5.0 V 5037 mV
1.8 V bias 1797 mV
3.3 V bias 3301 mV
5.0 V bias 5013 mV
8.0 V bias 7345 mV
BUS Revision 40

```

```

FPC 2 status:

```

```

State Online
Temperature Top 37 degrees C / 98 degrees F
Temperature Bottom 26 degrees C / 78 degrees F
Temperature MMB0 32 degrees C / 89 degrees F
Temperature MMB1 27 degrees C / 80 degrees F
Power:
1.8 V 1791 mV
2.5 V 2517 mV
3.3 V 3308 mV
5.0 V 5052 mV
1.8 V bias 1797 mV
3.3 V bias 3289 mV
5.0 V bias 4991 mV
8.0 V bias 7477 mV
BUS Revision 40

```



**show chassis  
environment fpc lcc**

```
user@host> show chassis environment fpc lcc 0  
lcc0-re0:  
-----
```



**(TX Matrix Plus Router)**

```

FPC 1 status:
State                               Online
Temperature Top                     46 degrees C / 114 degrees F
Temperature Bottom                   47 degrees C / 116 degrees F
Power
  1.8 V                             1788 mV
  1.8 V bias                         1787 mV
  3.3 V                             3321 mV
  3.3 V bias                         3306 mV
  5.0 V bias                         5018 mV
  5.0 V TOP                          5037 mV
  8.0 V bias                         7223 mV
Power (Base/PMB/MMB)
  1.2 V                             1205 mV
  1.5 V                             1503 mV
  5.0 V BOT                          5084 mV
  12.0 V TOP Base                    11775 mV
  12.0 V BOT Base                    11794 mV
  1.1 V PMB                          1108 mV
  1.2 V PMB                          1196 mV
  1.5 V PMB                          1499 mV
  1.8 V PMB                          1811 mV
  2.5 V PMB                          2515 mV
  3.3 V PMB                          3318 mV
  5.0 V PMB                          5030 mV
  12.0 V PMB                         11832 mV
  0.75 MMB TOP                       752 mV
  1.5 V MMB TOP                      1489 mV
  1.8 V MMB TOP                      1782 mV
  2.5 V MMB TOP                      2498 mV
  1.2 V MMB TOP                      1155 mV
  5.0 V MMB TOP                      4902 mV
  12.0 V MMB TOP                     11721 mV
  3.3 V MMB TOP                      3316 mV
  0.75 MMB BOT                       754 mV
  1.5 V MMB BOT                      1482 mV
  1.8 V MMB BOT                      1758 mV
  2.5 V MMB BOT                      2488 mV
  1.2 V MMB BOT                      1157 mV
  5.0 V MMB BOT                      4962 mV
  12.0 V MMB BOT                     11691 mV
  3.3 V MMB BOT                      3308 mV
  APS 00                            1484 mV
  APS 01                            2503 mV
  APS 02                            3313 mV
  5.0 V PIC 0                        5025 mV
  APS 10                            1501 mV
  APS 11                            2466 mV
  APS 12                            3311 mV
  5.0 V PIC 1                        5081 mV
Bus Revision                         49

```

**show chassis  
environment fpc (QFX  
Series)**

```

user@switch> show chassis environment fpc 0
FPC 0 status:
State                               Online
Temperature                         42 degrees C / 107 degrees F

```

**show chassis  
environment fpc**

```

user@switch> show chassis environment fpc interconnect-device interconnect1 0
FC 0 FPC 0 status:
State                               Online

```



**interconnect-device  
(QFabric Systems)**

Left Intake Temperature	24 degrees C / 75 degrees F
Right Intake Temperature	24 degrees C / 75 degrees F
Left Exhaust Temperature	27 degrees C / 80 degrees F
Right Exhaust Temperature	27 degrees C / 80 degrees F
Power	
BIAS 3V3	3330 mV
VDD 3V3	3300 mV
VDD 2V5	2502 mV
VDD 1V5	1496 mV
VDD 1V2	1194 mV
VDD 1V0	1000 mV
SW0 VDD 1V0	1020 mV
SW0 CVDD 1V025	1032 mV
SW1 VDD 1V0	1022 mV
SW1 CVDD 1V025	1030 mV
VDD 12V0 DIV3_33	3414 mV

**show chassis  
environment fpc 0**

```
user@switch> show chassis environment fpc 0
FPC 0 status:
State                Online
```



(PTX5000 Packet  
Transport Switch)

PMB Temperature	35 degrees C / 95 degrees F
Intake Temperature	33 degrees C / 91 degrees F
Exhaust A Temperature	51 degrees C / 123 degrees F
Exhaust B Temperature	43 degrees C / 109 degrees F
TL0 Temperature	48 degrees C / 118 degrees F
TQ0 Temperature	53 degrees C / 127 degrees F
TL1 Temperature	56 degrees C / 132 degrees F
TQ1 Temperature	58 degrees C / 136 degrees F
TL2 Temperature	55 degrees C / 131 degrees F
TQ2 Temperature	57 degrees C / 134 degrees F
TL3 Temperature	59 degrees C / 138 degrees F
TQ3 Temperature	59 degrees C / 138 degrees F
Power	
PMB 1.05v	1049 mV
PMB 1.5v	1500 mV
PMB 2.5v	2500 mV
PMB 3.3v	3299 mV
PFE0 1.5v	1500 mV
PFE0 1.0v	999 mV
TQ0 0.9v	900 mV
TL0 0.9v	900 mV
PFE1 1.5v	1499 mV
PFE1 1.0v	999 mV
TQ1 0.9v	899 mV
TL1 0.9v	900 mV
PFE2 1.5v	1500 mV
PFE2 1.0v	1000 mV
TQ2 0.9v	900 mV
TL2 0.9v	900 mV
PFE3 1.5v	1499 mV
PFE3 1.0v	1000 mV
TQ3 0.9v	900 mV
TL3 0.9v	900 mV
Bias 3.3v	3327 mV
FPC 3.3v	3300 mV
FPC 2.5v	2500 mV
SAM 0.9v	900 mV
A 12.0v	2014 mV
B 12.0v	2030 mV

show chassis  
environment FPC1(MX)

```

user@switch> show chassis environment fpc 1
FPC 1 status:
State                Online

```



## Routers with Media Services Blade [MSB])

Temperature Intake	36 degrees C / 96 degrees F
Temperature Exhaust A	39 degrees C / 102 degrees F
Temperature LU TSen	52 degrees C / 125 degrees F
Temperature LU Chip	54 degrees C / 129 degrees F
Temperature XM TSen	52 degrees C / 125 degrees F
Temperature XM Chip	60 degrees C / 140 degrees F
Temperature PCIe TSen	52 degrees C / 125 degrees F
Temperature PCIe Chip	69 degrees C / 156 degrees F
Power	
MPC-BIAS3V3-z12106	3302 mV
MPC-VDD3V3-z16100	3325 mV
MPC-AVDD1V0-z16100	1007 mV
MPC-PCIE_1V0-z16100	904 mV
MPC-LU0_1V0-z12004	996 mV
MPC-VDD_1V5-z12004	1498 mV
MPC-12VA-BMR453	11733 mV
MPC-12VB-BMR453	11728 mV
MPC-XM_0V9-vt273m	900 mV
I2C Slave Revision	81



## show chassis environment pem

<b>Syntax</b>	show chassis environment pem <slot>
<b>Syntax (ACX4000 Router)</b>	show chassis environment pem
<b>Syntax (TX Matrix Routers)</b>	show chassis environment pem <lcc number   scc> <slot>
<b>Syntax (TX Matrix Plus Routers)</b>	show chassis environment pem <lcc number   sfc number> <slot>
<b>Syntax (MX Series Router)</b>	show chassis environment pem <slot> <all-members> <local> <member member-id>
<b>Syntax (QFX Series)</b>	show chassis environment pem <slot (interconnect-device name slot )   (node-device name)>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS 11.3 for the QFX Series.
<b>Description</b>	Display Power Entry Module (PEM) environmental status information.



**NOTE:** The new high-capacity (4100W) enhanced DC PEM on MX960 routers includes a new design that can condition the input voltage. This results in the output voltage differing from the input voltage. The earlier generation of DC PEMs coupled the input power directly to the output, thereby making it safe to assume that the output voltage was equal to the input voltage.

- Options**
- none**—Display environmental information about both PEMs. For the TX Matrix router, display environmental information about the PEMs, the TX Matrix router, and its attached T640 routers. For the TX Matrix Plus router, display environmental information about the PEMs, the TX Matrix Plus router, and its attached T1600 routers.
  - all-members**—(MX Series routers only) (Optional) Display environmental information about the PEMs in all the member routers of the Virtual Chassis configuration.
  - interconnect-device name**—(QFabric systems only) (Optional) Display chassis environmental information about the PEMs in the Interconnect device.



**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display environmental information about the PEM in a specified T640 router (or line-card chassis) that is connected to a TX Matrix router. On a TX Matrix Plus router, display environmental information about the PEM in a specified T1600 router (or line-card chassis) that is connected to a TX Matrix Plus router. Replace ***number*** with a value from **0** through **3**.

**local**—(MX Series routers only) (Optional) Display environmental information about the PEM in the local Virtual Chassis member.

**member *member-id***—(MX Series routers only) (Optional) Display environmental information about the PEM in the specified member of the Virtual Chassis configuration. Replace ***member-id*** with a value of 0 or 1.

**node-device *name***—(QFabric systems only) (Optional) Display chassis environmental information about the PEMs in the Node device.

**scc**—(TX Matrix routers only) (Optional) Display environmental information about the PEM in the TX Matrix router (or switch-card chassis).

**sfc**—(TX Matrix Plus routers only) (Optional) Display environmental information about the PEM in the TX Matrix Plus router (or switch-fabric chassis).

**slot** —(Optional) Display environmental information about an individual PEM. Replace ***slot*** with **0** or **1**.

**Required Privilege Level**

view

**Related Documentation**

- [show chassis hardware on page 628](#)

**List of Sample Output**

[show chassis environment pem \(M40e Router\) on page 566](#)  
[show chassis environment pem \(M120 Router\) on page 566](#)  
[show chassis environment pem \(M160 Router\) on page 566](#)  
[show chassis environment pem \(M320 Router\) on page 566](#)  
[show chassis environment pem \(MX240 Router\) on page 567](#)  
[show chassis environment pem \(MX480 Router\) on page 567](#)  
[show chassis environment pem \(MX960 Router\) on page 567](#)  
[show chassis environment pem \(T320 Router\) on page 567](#)  
[show chassis environment pem \(T640 Router\) on page 567](#)  
[show chassis environment pem \(T4000 Router\) on page 568](#)  
[show chassis environment pem \(T640/T1600/T4000 Routers With Six-Input DC Power Supply\) on page 568](#)  
[show chassis environment pem lcc \(TX Matrix Routing Matrix\) on page 568](#)  
[show chassis environment pem scc \(TX Matrix Routing Matrix\) on page 569](#)  
[show chassis environment pem sfc \(TX Matrix Plus Routing Matrix\) on page 569](#)  
[show chassis environment pem lcc \(TX Matrix Plus Routing Matrix\) on page 569](#)  
[show chassis environment pem node-device \(QFabric System\) on page 570](#)  
[show chassis environment pem \(QFX Series\) on page 570](#)  
[show chassis environment pem interconnect-device \(QFabric System\) on page 570](#)



**Output Fields** Table 42 on page 565 lists the output fields for the **show chassis environment pem** command. Output fields are listed in the approximate order in which they appear.

**Table 42: show chassis environment pem Output Fields**

Field Name	Field Description
<b>PEM slot status</b>	Number of the PEM slot.
<b>State</b>	Status of the PEM.
<b>Temperature</b>	Temperature of the air flowing past the PEM.
<b>AC Input</b>	Status of the AC input for the specified component
<b>AC Output</b>	Status of the AC output for the specified component.
<b>DC input</b>	Status of the DC input for the specified component.
<b>DC output</b>	Status of the DC output for the specified component.
<b>Load</b>	(Not available on M40e or M160 routers) Information about the load on supply, in percentage of rated current being used.
<b>Voltage</b>	(M120, M160, M320, T640, T1600, TX Matrix, and TX Matrix Plus routers only) Information about voltage supplied to the PEM.
<b>Current</b>	(T640, T1600, TX Matrix, and TX Matrix Plus routers only) Information about the PEM current.
<b>Power</b>	(T640, T1600, TX Matrix, and TX Matrix Plus routers only) Information about the PEM power.
<b>SCG/CB/SIB</b>	(T640, T1600, TX Matrix, and TX Matrix Plus routers only) SONET Clock Generator/Control Board/Switch Interface Board.
<b>FAN</b>	(T640, T1600, and T4000 routers with six-input DC power supply only) Information about the DC output to the fan.



## Sample Output

show chassis  
environment pem  
(M40e Router)

```
user@host> show chassis environment pem
PEM 0 status:
  State           Online
  Temperature      OK
  AC input         OK
  DC output        OK
```

show chassis  
environment pem  
(M120 Router)

```
user@host> show chassis environment pem
PEM 0 status:
  State           Online
  Temperature      OK
  DC Input:        OK
  DC Output:       OK
  Load            Less than 20 percent
  Voltage:
    48.0 V input   52864 mV
    48.0 V fan supply 41655 mV
    3.3 V          3399 mV
PEM 1 status:
  State           Online
  Temperature      OK
  DC Input:        OK
  DC Output:       OK
  Load            Less than 20 percent
  Voltage:
    48.0 V input   54537 mV
    48.0 V fan supply 42910 mV
    3.3 V          3506 mV
```

show chassis  
environment pem  
(M160 Router)

```
user@host> show chassis environment pem
PEM 0 status:
  State           Online
  Temperature      OK
  DC input         OK
  DC output        OK
  Load            Less than 20 percent
  Voltage:
    48.0 V input   54833 mV
    48.0 V fan supply 50549 mV
    8.0 V bias     8239 mV
    5.0 V bias     5006 mV
```

show chassis  
environment pem  
(M320 Router)

```
user@host> show chassis environment pem
PEM 2 status:
  State           Online
  Temperature      OK
  DC input         OK
  Load            Less than 40 percent
    48.0 V input   51853 mV
    48.0 V fan supply 48877 mV
    8.0 V bias     8449 mV
    5.0 V bias     4998 mV
PEM 3 status:
  State           Online
  Temperature      OK
```



```

DC input          OK
Load              Less than 40 percent
  48.0 V input    51717 mV
  48.0 V fan supply 49076 mV
  8.0 V bias      8442 mV
  5.0 V bias      4998 mV

```

show chassis  
environment pem  
(MX240 Router)

```

user@host> show chassis environment pem
PEM 0 status:
  State          Online
  Temperature     OK
  DC Output:     OK
PEM 1 status:
  State          Online
  Temperature     OK
  DC Output:     OK

```

show chassis  
environment pem  
(MX480 Router)

```

user@host> show chassis environment pem
PEM 0 status:
  State          Online
  Temperature     OK
  DC Input:      OK
  DC Output:     OK
  Voltage:
PEM 1 status:
  State          Online
  Temperature     OK
  DC Input:      OK
  DC Output:     OK
  Voltage:

```

show chassis  
environment pem  
(MX960 Router)

```

user@host> show chassis environment pem
PEM 2 status:
  State          Present
PEM 3 status:
  State          Online
  Temperature     OK
  DC Output:     OK

```

show chassis  
environment pem  
(T320 Router)

```

user@host> show chassis environment pem
PEM 0 status:
  State          Online
  Temperature     OK
  DC input:      OK

```

show chassis  
environment pem  
(T640 Router)

```

user@host> show chassis environment pem
PEM 0 status:
  State          Online
  Temperature     22 degrees C / 71 degrees F
  AC input: OK
  DC output:
    Voltage      Current      Power      Load
    FPC 0        56875        606        34        4
    FPC 1        57016        525        29        3
    FPC 2         0         0         0         0
    FPC 3         0         0         0         0
    FPC 4         0         0         0         0
    FPC 5         0         0         0         0

```



FPC 6	57158	1581	90	12
FPC 7	0	0	0	0
SCG/CB/SIB	56750	1125	63	5

#### show chassis environment pem (T4000 Router)

```
user@host> show chassis environment pem
PEM 0 status:
  State: Online
  Temperature: 33 degrees C / 91 degrees F
  DC Input: OK
```

	Voltage(V)	Current(A)	Power(W)	Load(%)
INPUT 0	54.625	9.812	535	22
INPUT 1	54.625	10.250	559	23
INPUT 2	55.125	0.125	6	0
INPUT 3	54.500	10.062	548	22
INPUT 4	54.750	9.375	513	21
INPUT 5	54.750	10.187	557	23

```
DC Output
```

	Voltage(V)	Current(A)	Power(W)	Load(%)
FPC 0	55.750	10.125	564	37
FPC 1	51.625	0.000	0	0
FPC 2	52.000	0.000	0	0
FPC 3	55.062	10.437	574	38
FPC 4	52.125	0.000	0	0
FPC 5	55.000	9.375	515	34
FPC 6	55.187	9.687	534	35
FPC 7	51.437	0.000	0	0
SCG/CB/SIB	55.375	15.750	872	35
FAN	54.562	14.750	804	42

#### show chassis environment pem (T640/T1600/T4000 Routers With Six-Input DC Power Supply)

```
user@host> show chassis environment pem
PEM 1 status:
  State: Online
  Temperature: 36 degrees C / 96 degrees F
  DC Input: OK
```

	Voltage(V)	Current(A)	Power(W)	Load(%)
INPUT 0	0.000	0.000	0	0
INPUT 1	54.875	3.812	209	27
INPUT 2	55.375	3.937	218	29
INPUT 3	54.625	3.750	204	27
INPUT 4	55.125	3.375	186	24
INPUT 5	55.125	3.375	186	24

```
DC Output
```

	Voltage(V)	Current(A)	Power(W)	Load(%)
FPC 0	52.312	0.000	0	0
FPC 1	52.687	0.000	0	0
FPC 2	52.812	0.000	0	0
FPC 3	55.812	7.062	394	52
FPC 4	52.625	0.000	0	0
FPC 5	52.625	0.000	0	0
FPC 6	52.750	0.000	0	0
FPC 7	52.750	0.000	0	0
SCG/CB/SIB	55.937	11.937	667	55
FAN	55.812	4.937	275	36

#### show chassis environment pem lcc

```
user@host> show chassis environment pem 0 lcc 0
lcc0-re0:
-----
```



**(TX Matrix Routing Matrix)**

```

PEM 0 status:
State                Present
Temperature          27 degrees C / 80 degrees F
DC input:            Check
DC output:           Voltage Current      Power    Load
                    -----
                    FPC 0      0          0        0      0
                    FPC 1      0          0        0      0
                    FPC 2      0          0        0      0
                    FPC 3      0          0        0      0
                    FPC 4      0          0        0      0
                    FPC 5      0          0        0      0
                    FPC 6      0          0        0      0
                    FPC 7      0          0        0      0
SCG/CB/SIB           0          0        0      0

```

**show chassis  
environment pem scc  
(TX Matrix Routing Matrix)**

```

user@host> show chassis environment pem scc
scc-re0:

```

```

-----
PEM 1 status:
State                Online
Temperature          24 degrees C / 75 degrees F
DC input:            OK
DC output:           Voltage Current      Power    Load
                    -----
                    SIB 0      0          0        0      0
                    SIB 1      0          0        0      0
                    SIB 2      0          0        0      0
                    SIB 3      56550      0          0      0
                    SIB 4      55958      6912      386     51

```

**show chassis  
environment pem sfc  
(TX Matrix Plus Routing Matrix)**

```

user@host> show chassis environment pem sfc 0
sfc0-re0:

```

```

-----
PEM 0 status:
State                Online
Temperature          35 degrees C / 95 degrees F
DC Input:            OK
DC Output            Voltage Current      Power    Load
                    -----
Channel 0            53820    14140      761     59
Channel 1            53550    12720      681     53
Channel 2            53840    12930      696     54
Channel 3            53690    14990      804     63
Channel 4            53620    15070      808     63
Channel 5            53900    14820      798     62
Channel 6            54120     5020      271     21

```

**show chassis  
environment pem lcc**

```

user@host> show chassis environment lcc 0
lcc0-re1:

```



**(TX Matrix Plus Routing Matrix)**

```

-----
PEM 0 status:
  State                Online
  Temperature          38 degrees C / 100 degrees F
  DC Input:           OK
  DC Output            Voltage    Current    Power    Load
    FPC 0              0          0          0        0
    FPC 1              0          0          0        0
    FPC 2              0          0          0        0
    FPC 3              0          0          0        0
    FPC 4             56408       7575        427       56
    FPC 5              0          0          0        0
    FPC 6             56266       7956        447       59
    FPC 7             56283       6100        343       45
    SCG/CB/SIB         55916       8950        500       41

PEM 1 status:
  State                Present
  Temperature          35 degrees C / 95 degrees F
  DC Input:           Check
  DC Output            Voltage    Current    Power    Load
    FPC 0              0          0          0        0
    FPC 1              0          0          0        0
    FPC 2              0          0          0        0
    FPC 3              0          0          0        0
    FPC 4              0          0          0        0
    FPC 5              0          0          0        0
    FPC 6              0          0          0        0
    FPC 7              0          0          0        0
    SCG/CB/SIB         0          0          0        0

```

**show chassis  
environment pem  
node-device (QFabric  
System)**

```

user@switch> show chassis environment pem node-device node1
FPC 0 PEM 0 status:
  State                Check
  Airflow              Front to Back
  Temperature          OK
  AC Input:            OK
  DC Output            Voltage(V) Current(A) Power(W) Load(%)
                       12          10        120      18

FPC 0 PEM 1 status:
  State                Online
  Airflow              Back to Front
  Temperature          OK
  AC Input:            OK
  DC Output            Voltage(V) Current(A) Power(W) Load(%)
                       11          10        110      17

```

**show chassis  
environment pem  
(QFX Series)**

```

user@switch> show chassis environment pem
FPC 0 PEM 1 status:
  State                Online
  Airflow              Front to Back
  Temperature          OK
  AC Input:            OK
  DC Output            Voltage(V) Current(A) Power(W) Load(%)
                       12          17        204      31

```

**show chassis  
environment pem**

```

user@switch> show chassis environment pem interconnect-device IC1 1
IC1 PEM 1 status:
  State                Online

```



**interconnect-device**  
**(QFabric System)**

Airflow  
Temperature  
AC Input:  
DC Output

Front to Back  
OK  
OK

Voltage(V)	Current(A)	Power(W)	Load(%)
12	18	216	33



## show chassis environment routing-engine

---

<b>Syntax</b>	show chassis environment routing-engine <slot>
<b>Syntax (TX Matrix Routers)</b>	show chassis environment routing-engine <lcc number   scc> <slot>
<b>Syntax (TX Matrix Plus Routers)</b>	show chassis environment routing-engine <lcc number   sfc number> <slot>
<b>Syntax (MX2010 3D Universal Edge Routers)</b>	show chassis environment routing-engine <slot>
<b>Syntax (MX Series Routers)</b>	show chassis environment routing-engine <slot> <all-members> <local> <member member-id>
<b>Syntax (MX2020 3D Universal Edge Routers)</b>	show chassis environment routing-engine <slot>
<b>Syntax (QFX Series)</b>	show chassis environment routing-engine interconnect-device <i>name</i>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series. Command introduced in Junos OS Release 12.1 for the PTX Series Packet Transport Switches. Command introduced in Junos OS Release 12.1 for the T4000 Core Routers. Command introduced in Junos OS Release 12.3 for MX2020 3D Universal Edge Routers. Command introduced in Junos OS Release 12.3 for MX2010 3D Universal Edge Routers.
<b>Description</b>	Display Routing Engine environmental status information.
<b>Options</b>	<b>none</b> —Display environmental information about all Routing Engines. For a TX Matrix router, display environmental information about all Routing Engines on the TX Matrix router and its attached T640 routers. For a TX Matrix Plus router, display environmental information about all Routing Engines on the TX Matrix Plus router and its attached T1600 routers.  <b>all-members</b> —(MX Series routers only) (Optional) Display environmental information about the Routing Engines in all member routers in the Virtual Chassis configuration.



**interconnect-device *name***—(QFabric systems only) (Optional) Display environmental information about the Routing Engines for the Interconnect device.

**lcc *number***—(TX Matrix and TX Matrix routers only) (Optional) On a TX Matrix router, display environmental information about the Routing Engine in a specified T640 router (or line-card chassis) that is connected to the TX Matrix router. On a TX Matrix Plus router, display environmental information about the Routing Engine in a specified T1600 router (or line-card chassis) that is connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.

**local**—(MX Series routers only) (Optional) Display environmental information about the Routing Engines in the local Virtual Chassis member.

**member *member-id***—(MX Series routers only) (Optional) Display environmental information about the Routing Engines in the specified member in the Virtual Chassis configuration. Replace ***member-id*** with the value of 0 or 1.

**scc**—(TX Matrix router only) (Optional) Display environmental information about the Routing Engine in the TX Matrix router (or switch-card chassis).

**sfc**—(TX Matrix Plus router only) (Optional) Display environmental information about the Routing Engine in the TX Matrix Plus router (or switch-fabric chassis).

**slot**—(Optional) Display environmental information about an individual Routing Engine. On M10i, M20, M40e, M120, M160, M320, MX Series, MX2020 routers, and T Series routers, replace **slot** with 0 or 1. On M5, M7i, M10, and M40 routers and on the J Series router, replace **slot** with 0. On EX3200 and EX4200 standalone switches, replace **slot** with 0. On EX4200 switches in a Virtual Chassis configuration and on EX8208 and EX8216 switches, replace **slot** with 0 or 1. On the QFX3500 switch, there is only one Routing Engine, so you do not need to specify the slot number. On PTX Series Packet Transport Switches, replace **slot** with 0 or 1.

**Required Privilege Level** view

**Related Documentation**

- [request chassis routing-engine master on page 324](#)
- [show chassis routing-engine on page 781](#)

**List of Sample Output**

- [show chassis environment routing-engine \(Nonredundant\) on page 574](#)
- [show chassis environment routing-engine \(Redundant\) on page 574](#)
- [show chassis environment routing-engine \(MX2010 Router\) on page 574](#)
- [show chassis environment routing-engine \(MX2020 Router\) on page 574](#)
- [show chassis environment routing-engine \(TX Matrix Plus Router\) on page 575](#)
- [show chassis environment routing-engine \(T4000 Core Router\) on page 575](#)
- [show chassis environment routing-engine \(QFX Series\) on page 575](#)
- [show chassis environment routing-engine interconnect-device \(QFabric System\) on page 575](#)
- [show chassis environment routing-engine \(PTX5000 Packet Transport Switch\) on page 575](#)



**Output Fields** Table 43 on page 574 lists the output fields for the **show chassis environment routing-engine** command. Output fields are listed in the approximate order in which they appear.

**Table 43: show chassis environment routing-engine Output Fields**

Field Name	Field Description
Routing engine slot status	Number of the Routing Engine slot: 0 or 1.
State	Status of the Routing Engine: <ul style="list-style-type: none"> <li>• <b>Online Master</b>—Routing Engine is online, operating as Master.</li> <li>• <b>Online Standby</b>—Routing Engine is online, operating as Standby.</li> <li>• <b>Offline</b>—Routing Engine is offline.</li> </ul>
Temperature	Temperature of the air flowing past the Routing Engine.
CPU Temperature	(PTX Series and T4000 Core Routers only) Temperature of the air flowing past the Routing Engine CPU.

## Sample Output

**show chassis  
environment  
routing-engine  
(Nonredundant)**

```
user@host> show chassis environment routing-engine
Routing Engine 0 status:
  State                Online Master
  Temperature          27 degrees C / 80 degrees
```

**show chassis  
environment  
routing-engine  
(Redundant)**

```
user@host> show chassis environment routing-engine
Route Engine 0 status:
  State:                Online Master
  Temperature:          26 degrees C / 78 degrees F
Route Engine 1 status:
  State:                Online Standby
  Temperature:          26 degrees C / 78 degrees F
```

**show chassis  
environment  
routing-engine  
(MX2010 Router)**

```
user@host> show chassis environment routing-engine
Routing Engine 0 status:
  State                Online Master
  Temperature          37 degrees C / 98 degrees F
  CPU Temperature      37 degrees C / 98 degrees F
Routing Engine 1 status:
  State                Online Standby
  Temperature          35 degrees C / 95 degrees F
  CPU Temperature      34 degrees C / 93 degrees F
```

**show chassis  
environment**

```
user@host> show chassis environment routing-engine
Routing Engine 0 status:
  State                Online Master
```



```

routing-engine
(MX2020 Router)
    Temperature          35 degrees C / 95 degrees F
    CPU Temperature      34 degrees C / 93 degrees F
Routing Engine 1 status:
    State                Online Standby
    Temperature          44 degrees C / 111 degrees F
    CPU Temperature      43 degrees C / 109 degrees F

```

#### show chassis environment routing-engine (TX Matrix Plus Router)

```

user@host> show chassis environment routing-engine
sfc0-re0:
-----
Routing Engine 0 status:
    State                Online Master
    Temperature          26 degrees C / 78 degrees F
Routing Engine 1 status:
    State                Online Standby
    Temperature          28 degrees C / 82 degrees F

lcc0-re0:
-----
Routing Engine 0 status:
    State                Online Master
    Temperature          30 degrees C / 86 degrees F
Routing Engine 1 status:
    State                Online Standby
    Temperature          29 degrees C / 84 degrees F

```

#### show chassis environment routing-engine (T4000 Core Router)

```

user@host> show chassis environment routing-engine
Routing Engine 0 status:
    State                Online Master
    Temperature          33 degrees C / 91 degrees F
    CPU Temperature      50 degrees C / 122 degrees F
Routing Engine 1 status:
    State                Online Standby
    Temperature          33 degrees C / 91 degrees F
    CPU Temperature      46 degrees C / 114 degrees F

```

#### show chassis environment routing-engine (QFX Series)

```

user@switch> show chassis environment routing-engine
Routing Engine 0 status:
    State                Online Master
    Temperature          42 degrees C / 107 degrees F

```

#### show chassis environment routing-engine interconnect-device (QFabric System)

```

user@switch> show chassis environment routing-engine interconnect-device interconnect1
routing-engine interconnect-device interconnect1
Routing Engine 0 status:
    State                Online Standby
    Temperature          52 degrees C / 125 degrees F
Routing Engine 1 status:
    State                Online Master
    Temperature          57 degrees C / 134 degrees F

```

#### show chassis environment routing-engine

```

user@switch> show chassis environment routing-engine
Routing Engine 0 status:
    State                Online Master
    Temperature          55 degrees C / 131 degrees F

```



(PTX5000 Packet  
Transport Switch)

CPU Temperature	66 degrees C / 150 degrees F
Routing Engine 1 status:	
State	Online Standby
Temperature	52 degrees C / 125 degrees F
CPU Temperature	64 degrees C / 147 degrees F



## show chassis fan

<b>Syntax</b>	show chassis fan
<b>Syntax (ACX4000 Series Router)</b>	show chassis fan
<b>Syntax (MX Series Router)</b>	show chassis fan <all-members> <local> <member <i>member-id</i> >
<b>Syntax (T Series Routers)</b>	show chassis fan
<b>Syntax (MX2010 3D Universal Edge Router)</b>	show chassis fan
<b>Syntax (MX2020 3D Universal Edge Router)</b>	show chassis fan
<b>Syntax (QFabric Systems)</b>	show chassis fan <interconnect-device <i>name</i> >
<b>Syntax (TX Matrix Router)</b>	show chassis fan <lcc <i>number</i>   scc>
<b>Syntax (TX Matrix Plus Router)</b>	show chassis fan <lcc <i>number</i>   sfc <i>number</i> >
<b>Release Information</b>	<p>Command introduced in Junos OS Release 10.0 on MX Series 3D Universal Edge Routers, M120 routers, and M320 routers, T320 routers, T640 routers, T1600 routers, TX Matrix Routers, and TX Matrix Plus Routers.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 11.4 for EX Series switches.</p> <p>Command introduced in Junos OS Release 12.3 for PTX5000 Packet Transport Switches.</p> <p>Command introduced in Junos OS Release 12.1 for T4000 routers.</p> <p>Command introduced in Junos OS Release 12.3 for MX2020 3D Universal Edge Routers.</p> <p>Command introduced in Junos OS Release 12.3 for MX2010 3D Universal Edge Routers.</p> <p>Command introduced in Junos OS Release 12.3 for ACX Series Routers.</p>
<b>Description</b>	(T Series routers, TX Matrix routers, TX Matrix Plus router, M120 routers, M320 routers, MX2010 routers, MX2020 routers, MX Series 3D Universal Edge Routers, QFX3008-I Interconnect devices, EX Series switches, and PTX Series Packet Transport Switches only) Show information about the fan tray and fans.
<b>Options</b>	<p><b>all-members</b>—(MX Series routers only) (Optional) Display information about the fan tray and fans for all members of the Virtual Chassis configuration.</p> <p><b>local</b>—(MX Series routers only) (Optional) Display information about the fan tray and fans for the local Virtual Chassis member.</p>



**member *member-id***—(MX Series routers only) (Optional) Display information about the fan tray and fans for the specified member of the Virtual Chassis configuration. For an MX Series Virtual Chassis, replace *member-id* with a value of 0 or 1.

**interconnect-device *name***—(QFX3000-G QFabric systems only) (Optional) Display information about the fan tray and fans for the specified QFX3008-I Interconnect device.

**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display information about the fan tray and fans for the specified T640 router (or line-card chassis) that is connected to a TX Matrix router. On a TX Matrix Plus router, display information about the fan tray and fans for the specified T1600 router (or line-card chassis) that is connected to a TX Matrix Plus router. Replace number with a value from 0 through 3.

**scc**—(TX Matrix router only) (Optional) Display information about the fan tray and fans for the TX Matrix router (or switch-card chassis).

**sfc *number***—(TX Matrix Plus router only) (Optional) Display information about the fan tray and fans for the TX Matrix Plus router (or switch-fabric chassis). Replace number with 0.

**Required Privilege Level** view

#### List of Sample Output

[show chassis fan on page 580](#)  
[show chassis fan \(QFabric Systems\) on page 580](#)  
[show chassis fan \(EX Series Switches\) on page 581](#)  
[show chassis fan \(T320 Router\) on page 582](#)  
[show chassis fan \(T640 Router\) on page 582](#)  
[show chassis fan \(T1600 Router\) on page 582](#)  
[show chassis fan \(T4000 Core Router\) on page 583](#)  
[show chassis fan \(TX Matrix Router\) on page 583](#)  
[show chassis fan \(TX Matrix Plus Router\) on page 584](#)  
[show chassis fan \(PTX5000 Packet Transport Switch\) on page 585](#)  
[show chassis fan \(MX2010 Router\) on page 586](#)  
[show chassis fan \(MX2020 Router\) on page 586](#)  
[show chassis fan \(ACX4000 Router\) on page 587](#)

**Output Fields** [Table 44 on page 578](#) lists the output fields for the **show chassis fan** command. Output fields are listed in the approximate order in which they appear.

**Table 44: show chassis fan Output Fields**

Field Name	Field Description
Item	Fan item identifier.



Table 44: show chassis fan Output Fields (*continued*)

Field Name	Field Description
<b>Status</b>	<p>Status of the fan:</p> <ul style="list-style-type: none"> <li>• <b>OK</b>-Fan is running properly and within the normal range.</li> <li>• <b>Check</b>-Fan is in <b>Check</b> state because of some fault or alarm condition.</li> </ul>
<b>RPM</b>	(T Series routers, TX Matrix routers, TX Matrix Plus router, MX Series 3D Universal Edge Routers, QFX3108 Interconnect devices, and EX Series switches only) Fan speed in revolutions per minute (RPM).
<b>% RPM</b>	(MX2010 routers, MX2020 routers, and PTX Series Packet Transport Switches only) Percentage of the fan speed being used.
<b>Measurement</b>	<p>(T Series routers, TX Matrix routers, TX Matrix Plus router, MX Series 3D Universal Edge Routers, QFX3108 Interconnect devices, and EX Series switches only) Fan speed status based on different chassis cooling requirements:</p> <ul style="list-style-type: none"> <li>• Spinning at high speed</li> <li>• Spinning at intermediate speed</li> <li>• Spinning at normal speed</li> <li>• Spinning at low speed (except EX Series switches)</li> </ul> <p>(MX2010 routers, MX2020 routers, and PTX Series Packet Transport Switches only) Fan speed in revolutions per minute (RPM) for each fan in the fan tray.</p>



## Sample Output

### show chassis fan

```
user@host> show chassis fan
user@host> show chassis fan
```

Item	Status	RPM	Measurement
Top Tray Fan 1	OK	3790	Spinning at normal speed
Top Tray Fan 2	OK	3769	Spinning at normal speed
Top Tray Fan 3	OK	3769	Spinning at normal speed
Top Tray Fan 4	OK	3790	Spinning at normal speed
Top Tray Fan 5	OK	3790	Spinning at normal speed
Top Tray Fan 6	OK	3769	Spinning at normal speed
Top Tray Fan 7	OK	3790	Spinning at normal speed
Top Tray Fan 8	OK	3769	Spinning at normal speed
Top Tray Fan 9	OK	3769	Spinning at normal speed
Top Tray Fan 10	OK	3790	Spinning at normal speed
Top Tray Fan 11	OK	3790	Spinning at normal speed
Top Tray Fan 12	OK	3769	Spinning at normal speed
Bottom Tray Fan 1	OK	2880	Spinning at normal speed
Bottom Tray Fan 2	OK	2912	Spinning at normal speed
Bottom Tray Fan 3	OK	2928	Spinning at normal speed
Bottom Tray Fan 4	OK	2896	Spinning at normal speed
Bottom Tray Fan 5	OK	2896	Spinning at normal speed
Bottom Tray Fan 6	OK	2928	Spinning at normal speed

### show chassis fan (QFabric Systems)

```
user@host> show chassis fan interconnect-device interconnect1
```

Item	Status	RPM	Measurement
TFT 0 Fan 0	OK	2849	Spinning at normal speed
TFT 0 Fan 1	OK	2821	Spinning at normal speed
TFT 0 Fan 2	OK	2735	Spinning at normal speed
TFT 0 Fan 3	OK	2815	Spinning at normal speed
TFT 0 Fan 4	OK	2828	Spinning at normal speed
TFT 0 Fan 5	OK	2863	Spinning at normal speed
BFT 1 Fan 0	OK	2941	Spinning at normal speed
BFT 1 Fan 1	OK	3008	Spinning at normal speed
BFT 1 Fan 2	OK	3073	Spinning at normal speed
BFT 1 Fan 3	OK	2925	Spinning at normal speed
BFT 1 Fan 4	OK	2863	Spinning at normal speed
BFT 1 Fan 5	OK	2933	Spinning at normal speed
SFT 0 Fan 0 Rotor 0	OK	15472	Spinning at normal speed
SFT 0 Fan 0 Rotor 1	OK	14477	Spinning at normal speed
SFT 0 Fan 1 Rotor 0	OK	15561	Spinning at normal speed
SFT 0 Fan 1 Rotor 1	OK	14210	Spinning at normal speed
SFT 0 Fan 2 Rotor 0	OK	16167	Spinning at normal speed
SFT 0 Fan 2 Rotor 1	OK	14248	Spinning at normal speed
SFT 0 Fan 3 Rotor 0	OK	16463	Spinning at normal speed
SFT 0 Fan 3 Rotor 1	OK	14099	Spinning at normal speed
SFT 1 Fan 0 Rotor 0	OK	15083	Spinning at normal speed
SFT 1 Fan 0 Rotor 1	OK	13533	Spinning at normal speed
SFT 1 Fan 1 Rotor 0	OK	16071	Spinning at normal speed
SFT 1 Fan 1 Rotor 1	OK	14400	Spinning at normal speed
SFT 1 Fan 2 Rotor 0	OK	15517	Spinning at normal speed
SFT 1 Fan 2 Rotor 1	OK	14210	Spinning at normal speed
SFT 1 Fan 3 Rotor 0	OK	16413	Spinning at normal speed
SFT 1 Fan 3 Rotor 1	OK	14400	Spinning at normal speed
SFT 2 Fan 0 Rotor 0	OK	15297	Spinning at normal speed
SFT 2 Fan 0 Rotor 1	OK	14634	Spinning at normal speed
SFT 2 Fan 1 Rotor 0	OK	15561	Spinning at normal speed
SFT 2 Fan 1 Rotor 1	OK	14285	Spinning at normal speed



```

SFT 2 Fan 2 Rotor 0      OK      15835  Spinning at normal speed
SFT 2 Fan 2 Rotor 1      OK      14400  Spinning at normal speed
SFT 2 Fan 3 Rotor 0      OK      15789  Spinning at normal speed
SFT 2 Fan 3 Rotor 1      OK      14323  Spinning at normal speed
SFT 3 Fan 0 Rotor 0      OK      16314  Spinning at normal speed
SFT 3 Fan 0 Rotor 1      OK      14876  Spinning at normal speed
SFT 3 Fan 1 Rotor 0      OK      15835  Spinning at normal speed
SFT 3 Fan 1 Rotor 1      OK      14323  Spinning at normal speed
SFT 3 Fan 2 Rotor 0      OK      16265  Spinning at normal speed
SFT 3 Fan 2 Rotor 1      OK      14594  Spinning at normal speed
SFT 3 Fan 3 Rotor 0      OK      16071  Spinning at normal speed
SFT 3 Fan 3 Rotor 1      OK      14323  Spinning at normal speed
SFT 4 Fan 0 Rotor 0      OK      15652  Spinning at normal speed
SFT 4 Fan 0 Rotor 1      OK      14438  Spinning at normal speed
SFT 4 Fan 1 Rotor 0      OK      16167  Spinning at normal speed
SFT 4 Fan 1 Rotor 1      OK      14555  Spinning at normal speed
SFT 4 Fan 2 Rotor 0      OK      16023  Spinning at normal speed
SFT 4 Fan 2 Rotor 1      OK      14361  Spinning at normal speed
SFT 4 Fan 3 Rotor 0      OK      16216  Spinning at normal speed
SFT 4 Fan 3 Rotor 1      OK      14438  Spinning at normal speed
SFT 5 Fan 0 Rotor 0      OK      15297  Spinning at normal speed
SFT 5 Fan 0 Rotor 1      OK      14173  Spinning at normal speed
SFT 5 Fan 1 Rotor 0      OK      15472  Spinning at normal speed
SFT 5 Fan 1 Rotor 1      OK      13846  Spinning at normal speed
SFT 5 Fan 2 Rotor 0      OK      15340  Spinning at normal speed
SFT 5 Fan 2 Rotor 1      OK      13917  Spinning at normal speed
SFT 5 Fan 3 Rotor 0      OK      15835  Spinning at normal speed
SFT 5 Fan 3 Rotor 1      OK      13917  Spinning at normal speed
SFT 6 Fan 0 Rotor 0      OK      15743  Spinning at normal speed
SFT 6 Fan 0 Rotor 1      OK      14594  Spinning at normal speed
SFT 6 Fan 1 Rotor 0      OK      16167  Spinning at normal speed
SFT 6 Fan 1 Rotor 1      OK      14634  Spinning at normal speed
SFT 6 Fan 2 Rotor 0      OK      16167  Spinning at normal speed
SFT 6 Fan 2 Rotor 1      OK      14516  Spinning at normal speed
SFT 6 Fan 3 Rotor 0      OK      16666  Spinning at normal speed
SFT 6 Fan 3 Rotor 1      OK      14438  Spinning at normal speed
SFT 7 Fan 0 Rotor 0      OK      15517  Spinning at normal speed
SFT 7 Fan 0 Rotor 1      OK      14438  Spinning at normal speed
SFT 7 Fan 1 Rotor 0      OK      15517  Spinning at normal speed
SFT 7 Fan 1 Rotor 1      OK      14361  Spinning at normal speed
SFT 7 Fan 2 Rotor 0      OK      16167  Spinning at normal speed
SFT 7 Fan 2 Rotor 1      OK      14555  Spinning at normal speed
SFT 7 Fan 3 Rotor 0      OK      15697  Spinning at normal speed
SFT 7 Fan 3 Rotor 1      OK      14361  Spinning at normal speed

```

### show chassis fan (EX Series Switches)

```
user@host> show chassis fan
```

Item	Status	RPM	Measurement
Fan 1	OK	3477	Spinning at normal speed
Fan 2	OK	3477	Spinning at normal speed
Fan 3	OK	3479	Spinning at normal speed
Fan 4	OK	3508	Spinning at normal speed
Fan 5	OK	3517	Spinning at normal speed
Fan 6	OK	3531	Spinning at normal speed
Fan 7	OK	3439	Spinning at normal speed
Fan 8	OK	3424	Spinning at normal speed
Fan 9	OK	3413	Spinning at normal speed
Fan 10	OK	3439	Spinning at normal speed
Fan 11	OK	3446	Spinning at normal speed
Fan 12	OK	3432	Spinning at normal speed



**show chassis fan**  
(T320 Router)

user@host&gt; show chassis fan

Item	Status	RPM	Measurement
Top Left Front fan	OK	2850	Spinning at normal speed
Top Left Middle fan	OK	2820	Spinning at normal speed
Top Left Rear fan	OK	2970	Spinning at normal speed
Top Right Front fan	OK	2790	Spinning at normal speed
Top Right Middle fan	OK	2640	Spinning at normal speed
Top Right Rear fan	OK	2790	Spinning at normal speed
Bottom Left Front fan	OK	2520	Spinning at normal speed
Bottom Left Middle fan	OK	2610	Spinning at normal speed
Bottom Left Rear fan	OK	2550	Spinning at normal speed
Bottom Right Front fan	OK	2610	Spinning at normal speed
Bottom Right Middle fan	OK	2880	Spinning at normal speed
Bottom Right Rear fan	OK	2790	Spinning at normal speed
Rear Tray Top fan	OK	2130	Spinning at normal speed
Rear Tray Second fan	OK	2190	Spinning at normal speed
Rear Tray Middle fan	OK	2250	Spinning at normal speed
Rear Tray Fourth fan	OK	2220	Spinning at normal speed
Rear Tray Bottom fan	OK	2280	Spinning at normal speed

**show chassis fan**  
(T640 Router)

user@host&gt; show chassis fan

Item	Status	RPM	Measurement
Top Left Front fan	OK	3420	Spinning at normal speed
Top Left Middle fan	OK	3420	Spinning at normal speed
Top Left Rear fan	OK	3420	Spinning at normal speed
Top Right Front fan	OK	3420	Spinning at normal speed
Top Right Middle fan	OK	3420	Spinning at normal speed
Top Right Rear fan	OK	3450	Spinning at normal speed
Bottom Left Front fan	OK	3390	Spinning at normal speed
Bottom Left Middle fan	OK	3420	Spinning at normal speed
Bottom Left Rear fan	OK	3390	Spinning at normal speed
Bottom Right Front fan	OK	3390	Spinning at normal speed
Bottom Right Middle fan	OK	3390	Spinning at normal speed
Bottom Right Rear fan	OK	3390	Spinning at normal speed
Rear Tray Top fan	OK	5220	Spinning at normal speed
Rear Tray Second fan	OK	5220	Spinning at normal speed
Rear Tray Third fan	OK	5220	Spinning at normal speed
Rear Tray Fourth fan	OK	5220	Spinning at normal speed
Rear Tray Fifth fan	OK	5220	Spinning at normal speed
Rear Tray Sixth fan	OK	5220	Spinning at normal speed
Rear Tray Seventh fan	OK	5220	Spinning at normal speed
Rear Tray Bottom fan	OK	5220	Spinning at normal speed

**show chassis fan**  
(T1600 Router)

user@host&gt; show chassis fan

Item	Status	RPM	Measurement
Top Left Front fan	OK	3420	Spinning at normal speed
Top Left Middle fan	OK	3420	Spinning at normal speed
Top Left Rear fan	OK	3450	Spinning at normal speed
Top Right Front fan	OK	3420	Spinning at normal speed
Top Right Middle fan	OK	3420	Spinning at normal speed
Top Right Rear fan	OK	3390	Spinning at normal speed
Bottom Left Front fan	OK	3420	Spinning at normal speed
Bottom Left Middle fan	OK	3420	Spinning at normal speed
Bottom Left Rear fan	OK	3390	Spinning at normal speed
Bottom Right Front fan	OK	3390	Spinning at normal speed



Bottom Right Middle fan	OK	3420	Spinning at normal speed
Bottom Right Rear fan	OK	3390	Spinning at normal speed
Rear Tray Top fan	OK	5190	Spinning at normal speed
Rear Tray Second fan	OK	5190	Spinning at normal speed
Rear Tray Third fan	OK	5190	Spinning at normal speed
Rear Tray Fourth fan	OK	5190	Spinning at normal speed
Rear Tray Fifth fan	OK	5190	Spinning at normal speed
Rear Tray Sixth fan	OK	5190	Spinning at normal speed
Rear Tray Seventh fan	OK	5190	Spinning at normal speed
Rear Tray Bottom fan	OK	5190	Spinning at normal speed

#### show chassis fan (T4000 Core Router)

```
user@host> show chassis fan
```

Item	Status	RPM	Measurement
Top Left Front fan	OK	5190	Spinning at high speed
Top Left Middle fan	OK	5220	Spinning at high speed
Top Left Rear fan	OK	5190	Spinning at high speed
Top Right Front fan	OK	5160	Spinning at high speed
Top Right Middle fan	OK	5190	Spinning at high speed
Top Right Rear fan	OK	5160	Spinning at high speed
Bottom Left Front fan	OK	6030	Spinning at high speed
Bottom Left Middle fan	OK	6090	Spinning at high speed
Bottom Left Rear fan	OK	6090	Spinning at high speed
Bottom Right Front fan	OK	6030	Spinning at high speed
Bottom Right Middle fan	OK	6060	Spinning at high speed
Bottom Right Rear fan	OK	6060	Spinning at high speed
Rear Tray Top fan	OK	10000	Spinning at high speed
Rear Tray Second fan	OK	10000	Spinning at high speed
Rear Tray Third fan	OK	10000	Spinning at high speed
Rear Tray Fourth fan	OK	10000	Spinning at high speed
Rear Tray Fifth fan	OK	10000	Spinning at high speed
Rear Tray Sixth fan	OK	10000	Spinning at high speed
Rear Tray Seventh fan	OK	10000	Spinning at high speed
Rear Tray Bottom fan	OK	10000	Spinning at high speed

#### show chassis fan (TX Matrix Router)

```
user@host> show chassis fan
scc-re0:
```

Item	Status	RPM	Measurement
Top Left Front fan	OK	3420	Spinning at normal speed
Top Left Middle fan	OK	3390	Spinning at normal speed
Top Left Rear fan	OK	3420	Spinning at normal speed
Top Right Front fan	OK	3390	Spinning at normal speed
Top Right Middle fan	OK	3420	Spinning at normal speed
Top Right Rear fan	OK	3390	Spinning at normal speed
Bottom Left Front fan	OK	3420	Spinning at normal speed
Bottom Left Middle fan	OK	3450	Spinning at normal speed
Bottom Left Rear fan	OK	3420	Spinning at normal speed
Bottom Right Front fan	OK	3420	Spinning at normal speed
Bottom Right Middle fan	OK	3420	Spinning at normal speed
Bottom Right Rear fan	OK	3420	Spinning at normal speed
Rear Tray Top fan	OK	3420	Spinning at normal speed
Rear Tray Second fan	OK	5190	Spinning at normal speed
Rear Tray Third fan	OK	5190	Spinning at normal speed
Rear Tray Fourth fan	OK	5190	Spinning at normal speed
Rear Tray Fifth fan	OK	3420	Spinning at normal speed
Rear Tray Sixth fan	OK	3420	Spinning at normal speed
Rear Tray Seventh fan	OK	3420	Spinning at normal speed
Rear Tray Bottom fan	OK	3420	Spinning at normal speed



```
lcc2-re0:
```

Item	Status	RPM	Measurement
Top Left Front fan	OK	3420	Spinning at normal speed
Top Left Middle fan	OK	3420	Spinning at normal speed
Top Left Rear fan	OK	3450	Spinning at normal speed
Top Right Front fan	OK	3420	Spinning at normal speed
Top Right Middle fan	OK	3450	Spinning at normal speed
Top Right Rear fan	OK	3360	Spinning at normal speed
Bottom Left Front fan	OK	3420	Spinning at normal speed
Bottom Left Middle fan	OK	3480	Spinning at normal speed
Bottom Left Rear fan	OK	3420	Spinning at normal speed
Bottom Right Front fan	OK	3420	Spinning at normal speed
Bottom Right Middle fan	OK	3390	Spinning at normal speed
Bottom Right Rear fan	OK	3420	Spinning at normal speed
Rear Tray Top fan	OK	3420	Spinning at normal speed
Rear Tray Second fan	OK	3420	Spinning at normal speed
Rear Tray Third fan	OK	3420	Spinning at normal speed
Rear Tray Fourth fan	OK	3420	Spinning at normal speed
Rear Tray Fifth fan	OK	3420	Spinning at normal speed
Rear Tray Sixth fan	OK	3420	Spinning at normal speed
Rear Tray Seventh fan	OK	3420	Spinning at normal speed
Rear Tray Bottom fan	OK	3420	Spinning at normal speed

show chassis fan (TX  
Matrix Plus Router)

```
user@host> show chassis fan
sfc0-re0:
```

Item	Status	RPM	Measurement
Fan Tray 0 Fan 1	OK	4350	Spinning at normal speed
Fan Tray 0 Fan 2	OK	4380	Spinning at normal speed
Fan Tray 0 Fan 3	OK	4410	Spinning at normal speed
Fan Tray 0 Fan 4	OK	4380	Spinning at normal speed
Fan Tray 0 Fan 5	OK	4350	Spinning at normal speed
Fan Tray 0 Fan 6	OK	4380	Spinning at normal speed
Fan Tray 1 Fan 1	OK	4410	Spinning at normal speed
Fan Tray 1 Fan 2	OK	4380	Spinning at normal speed
Fan Tray 1 Fan 3	OK	4410	Spinning at normal speed
Fan Tray 1 Fan 4	OK	4380	Spinning at normal speed
Fan Tray 1 Fan 5	OK	4410	Spinning at normal speed
Fan Tray 1 Fan 6	OK	4410	Spinning at normal speed
Fan Tray 2 Fan 1	OK	4380	Spinning at normal speed
Fan Tray 2 Fan 2	OK	4380	Spinning at normal speed
Fan Tray 2 Fan 3	OK	4380	Spinning at normal speed
Fan Tray 2 Fan 4	OK	4410	Spinning at normal speed
Fan Tray 2 Fan 5	OK	4380	Spinning at normal speed
Fan Tray 2 Fan 6	OK	4410	Spinning at normal speed
Fan Tray 2 Fan 7	OK	4410	Spinning at normal speed
Fan Tray 2 Fan 8	OK	4380	Spinning at normal speed
Fan Tray 2 Fan 9	OK	4380	Spinning at normal speed
Fan Tray 3 Fan 1	OK	4350	Spinning at normal speed
Fan Tray 3 Fan 2	OK	4380	Spinning at normal speed
Fan Tray 3 Fan 3	OK	4410	Spinning at normal speed
Fan Tray 3 Fan 4	OK	4440	Spinning at normal speed
Fan Tray 3 Fan 5	OK	4380	Spinning at normal speed
Fan Tray 3 Fan 6	OK	4410	Spinning at normal speed
Fan Tray 3 Fan 7	OK	4410	Spinning at normal speed
Fan Tray 3 Fan 8	OK	4380	Spinning at normal speed
Fan Tray 3 Fan 9	OK	4410	Spinning at normal speed
Fan Tray 4 Fan 1	OK	4410	Spinning at normal speed
Fan Tray 4 Fan 2	OK	4410	Spinning at normal speed
Fan Tray 4 Fan 3	OK	4380	Spinning at normal speed



Fan Tray 4 Fan 4	OK	4380	Spinning at normal speed
Fan Tray 4 Fan 5	OK	4410	Spinning at normal speed
Fan Tray 4 Fan 6	OK	4410	Spinning at normal speed
Fan Tray 4 Fan 7	OK	4410	Spinning at normal speed
Fan Tray 4 Fan 8	OK	4410	Spinning at normal speed
Fan Tray 4 Fan 9	OK	4410	Spinning at normal speed
Fan Tray 5 Fan 1	OK	4350	Spinning at normal speed
Fan Tray 5 Fan 2	OK	4380	Spinning at normal speed
Fan Tray 5 Fan 3	OK	4380	Spinning at normal speed
Fan Tray 5 Fan 4	OK	4350	Spinning at normal speed
Fan Tray 5 Fan 5	OK	4380	Spinning at normal speed
Fan Tray 5 Fan 6	OK	4410	Spinning at normal speed
Fan Tray 5 Fan 7	OK	4410	Spinning at normal speed
Fan Tray 5 Fan 8	OK	4380	Spinning at normal speed
Fan Tray 5 Fan 9	OK	4410	Spinning at normal speed

```
1cc0-re0:
```

Item	Status	RPM	Measurement
Top Left Front fan	OK	3420	Spinning at normal speed
Top Left Middle fan	OK	3420	Spinning at normal speed
Top Left Rear fan	OK	3420	Spinning at normal speed
Top Right Front fan	OK	3450	Spinning at normal speed
Top Right Middle fan	OK	3420	Spinning at normal speed
Top Right Rear fan	OK	3420	Spinning at normal speed
Bottom Left Front fan	OK	3420	Spinning at normal speed
Bottom Left Middle fan	OK	3420	Spinning at normal speed
Bottom Left Rear fan	OK	3390	Spinning at normal speed
Bottom Right Front fan	OK	3420	Spinning at normal speed
Bottom Right Middle fan	OK	3390	Spinning at normal speed
Bottom Right Rear fan	OK	3390	Spinning at normal speed
Rear Tray Top fan	OK	7050	Spinning at normal speed
Rear Tray Second fan	OK	7050	Spinning at normal speed
Rear Tray Third fan	OK	7050	Spinning at normal speed
Rear Tray Fourth fan	OK	7050	Spinning at normal speed
Rear Tray Fifth fan	OK	7050	Spinning at normal speed
Rear Tray Sixth fan	OK	7050	Spinning at normal speed
Rear Tray Seventh fan	OK	7050	Spinning at normal speed
Rear Tray Bottom fan	OK	7050	Spinning at normal speed

show chassis fan  
(PTX5000 Packet  
Transport Switch)

```
user@host> show chassis fan
user@host> show chassis fan
```

Item	Status	% RPM	Measurement
Fan Tray 0 Fan 1	OK	29%	2700 RPM
Fan Tray 0 Fan 2	OK	29%	2700 RPM
Fan Tray 0 Fan 3	OK	29%	2742 RPM
Fan Tray 0 Fan 4	OK	29%	2700 RPM
Fan Tray 0 Fan 5	OK	30%	2828 RPM
Fan Tray 0 Fan 6	OK	30%	2828 RPM
Fan Tray 0 Fan 7	OK	29%	2700 RPM
Fan Tray 0 Fan 8	OK	30%	2785 RPM
Fan Tray 0 Fan 9	OK	30%	2828 RPM
Fan Tray 0 Fan 10	OK	30%	2828 RPM
Fan Tray 0 Fan 11	OK	30%	2785 RPM
Fan Tray 0 Fan 12	OK	30%	2828 RPM
Fan Tray 0 Fan 13	OK	31%	2871 RPM
Fan Tray 0 Fan 14	OK	30%	2828 RPM
Fan Tray 1 Fan 1	OK	42%	3033 RPM
Fan Tray 1 Fan 2	OK	42%	3066 RPM
Fan Tray 1 Fan 3	OK	43%	3099 RPM
Fan Tray 1 Fan 4	OK	43%	3166 RPM



Fan Tray 1 Fan 5	OK	45%	3266 RPM
Fan Tray 1 Fan 6	OK	43%	3133 RPM
Fan Tray 2 Fan 1	OK	29%	2099 RPM
Fan Tray 2 Fan 2	OK	30%	2199 RPM
Fan Tray 2 Fan 3	OK	30%	2166 RPM
Fan Tray 2 Fan 4	OK	33%	2399 RPM
Fan Tray 2 Fan 5	OK	29%	2133 RPM
Fan Tray 2 Fan 6	OK	32%	2366 RPM

### show chassis fan (MX2010 Router)

```
user@host > show chassis fan
```

Item	Status	% RPM	Measurement
Fan Tray 0 Fan 1	OK	37%	3360 RPM
Fan Tray 0 Fan 2	OK	38%	3480 RPM
Fan Tray 0 Fan 3	OK	37%	3360 RPM
Fan Tray 0 Fan 4	OK	37%	3360 RPM
Fan Tray 0 Fan 5	OK	38%	3480 RPM
Fan Tray 0 Fan 6	OK	37%	3360 RPM
Fan Tray 1 Fan 1	OK	38%	3480 RPM
Fan Tray 1 Fan 2	OK	40%	3600 RPM
Fan Tray 1 Fan 3	OK	38%	3480 RPM
Fan Tray 1 Fan 4	OK	38%	3480 RPM
Fan Tray 1 Fan 5	OK	38%	3480 RPM
Fan Tray 1 Fan 6	OK	38%	3480 RPM
Fan Tray 2 Fan 1	OK	38%	3480 RPM
Fan Tray 2 Fan 2	OK	41%	3720 RPM
Fan Tray 2 Fan 3	OK	38%	3480 RPM
Fan Tray 2 Fan 4	OK	38%	3480 RPM
Fan Tray 2 Fan 5	OK	38%	3480 RPM
Fan Tray 2 Fan 6	OK	38%	3480 RPM
Fan Tray 3 Fan 1	OK	38%	3480 RPM
Fan Tray 3 Fan 2	OK	40%	3600 RPM
Fan Tray 3 Fan 3	OK	40%	3600 RPM
Fan Tray 3 Fan 4	OK	40%	3600 RPM
Fan Tray 3 Fan 5	OK	40%	3600 RPM
Fan Tray 3 Fan 6	OK	38%	3480 RPM

### show chassis fan (MX2020 Router)

```
user@host > show chassis fan
```

Item	Status	% RPM	Measurement
Fan Tray 0 Fan 1	OK	37%	3360 RPM
Fan Tray 0 Fan 2	OK	37%	3360 RPM
Fan Tray 0 Fan 3	OK	36%	3240 RPM
Fan Tray 0 Fan 4	OK	37%	3360 RPM
Fan Tray 0 Fan 5	OK	37%	3360 RPM
Fan Tray 0 Fan 6	OK	37%	3360 RPM
Fan Tray 1 Fan 1	OK	37%	3360 RPM
Fan Tray 1 Fan 2	OK	37%	3360 RPM
Fan Tray 1 Fan 3	OK	37%	3360 RPM
Fan Tray 1 Fan 4	OK	37%	3360 RPM
Fan Tray 1 Fan 5	OK	37%	3360 RPM
Fan Tray 1 Fan 6	OK	36%	3240 RPM
Fan Tray 2 Fan 1	OK	37%	3360 RPM
Fan Tray 2 Fan 2	OK	37%	3360 RPM
Fan Tray 2 Fan 3	OK	37%	3360 RPM
Fan Tray 2 Fan 4	OK	37%	3360 RPM
Fan Tray 2 Fan 5	OK	37%	3360 RPM
Fan Tray 2 Fan 6	OK	38%	3480 RPM
Fan Tray 3 Fan 1	OK	38%	3480 RPM
Fan Tray 3 Fan 2	OK	38%	3480 RPM
Fan Tray 3 Fan 3	OK	38%	3480 RPM
Fan Tray 3 Fan 4	OK	37%	3360 RPM



Fan Tray 3 Fan 5	OK	37%	3360 RPM
Fan Tray 3 Fan 6	OK	37%	3360 RPM

**show chassis fan**  
**(ACX4000 Router)**

user@host > **show chassis fan**

Item	Status	RPM	Measurement
Fan 1	OK	4140	Spinning at normal speed
Fan 2	OK	4200	Spinning at normal speed



## show chassis firmware

---

<b>Syntax</b>	show chassis firmware
<b>Syntax (TX Matrix Routers)</b>	show chassis firmware <lcc <i>number</i>   scc>
<b>Syntax (TX Matrix Plus Routers)</b>	show chassis firmware <lcc <i>number</i>   sfc <i>number</i> >
<b>Syntax (MX Series Routers)</b>	show chassis firmware <all-members> <local> <member <i>member-id</i> >
<b>Syntax (MX2010 3D Universal Edge Routers)</b>	show chassis firmware
<b>Syntax (MX2020 3D Universal Edge Routers)</b>	show chassis firmware
<b>Syntax (QFX Series)</b>	show chassis firmware interconnect-device <i>name</i> node-device <i>name</i>
<b>Syntax (ACX Series Universal Access Routers)</b>	show chassis firmware
<b>Syntax (EX Series Switches)</b>	show chassis firmware <detail>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.4 for EX Series switches. <b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6. Command introduced for EX8200 switches in Junos OS Release 10.2 for EX Series switches. Command introduced in Junos OS Release 11.1 for QFX Series. Command introduced in Junos OS Release 12.2 for ACX Series Universal Access Routers. Command introduced in Junos OS Release 12.3 for MX2010 3D Universal Edge Routers. Command introduced in Junos OS Release 12.3 for MX2020 3D Universal Edge Routers. Command introduced in Junos OS Release 12.3 for ACX4000 Universal Access Routers.
<b>Description</b>	On routers and switches, display the version levels of the firmware running on the System Control Board (SCB), Switching and Forwarding Module (SFM), System and Switch Board (SSB), Forwarding Engine Board (FEB), Flexible PIC Concentrators (FPCs), and Routing Engines. On a TX Matrix Plus router, display the version levels of the firmware running on the FPCs and the Switch Processor Mezzanine Board (SPMBs).



On EX2200, EX3200, and EX4200 switches, and the QFX Series, display the version levels of the firmware running on the switch. On an EX8208 switch, display the version levels of the firmware running on the Switch Fabric and Routing Engine (SRE) modules and on the line cards (shown as FPCs). On an EX8216 switch, display the version levels of the firmware running on the Routing Engine (RE) modules and on the line cards (shown as FPCs).

- Options** **none**—Display the version levels of the firmware running. For an EX4200 switch that is a member of a Virtual Chassis, display version levels for all members. For a TX Matrix router, display version levels for the firmware on the TX Matrix router and on all the T640 routers connected to the TX Matrix router. For a TX Matrix Plus router, display version levels for the firmware on the TX Matrix Plus router and on all the T1600 routers connected to the TX Matrix Plus router.
- all-members**—(MX Series routers only) (Optional) Display the version levels of the firmware running for all members of the Virtual Chassis configuration.
- interconnect-device *name***—(QFabric systems) (Optional) Display the version levels of the firmware running on the Interconnect device.
- lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display version levels for the firmware on a specified T640 router (or line-card chassis) that is connected to the TX Matrix router. On a TX Matrix Plus router, display the version levels for the firmware on a specified T1600 router (or line-card chassis) that is connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.
- local**—(MX Series routers only) (Optional) Display the version levels of the firmware running for the local Virtual Chassis member.
- member *member-id***—(MX Series routers only) (Optional) Display the version levels of the firmware running for the specified member of the Virtual Chassis configuration. Replace ***member-id*** with a value of 0 or 1.
- node-device**—(QFabric systems only) (Optional) Display the version levels of the firmware running on the Node device.
- scc**—(TX Matrix router only) (Optional) Display version levels for the firmware on the TX Matrix router (or switch-card chassis).
- sfc *number***—(TX Matrix Plus router only) (Optional) Display version levels for the firmware on the TX Matrix Plus router (or switch-fabric chassis). Replace ***number*** with 0.
- detail**—(EX3200, EX3300, EX4200, and EX4500 standalone and Virtual Chassis member switches only) (Optional) Display version levels of the firmware running on the switch for its programmable hardware components.

**Required Privilege Level** view



## Related Documentation

- Upgrading the HSM Firmware

## List of Sample Output

[show chassis firmware \(M10 Router\) on page 592](#)  
[show chassis firmware \(M20 Router\) on page 592](#)  
[show chassis firmware \(M40 Router\) on page 592](#)  
[show chassis firmware \(M120 Router\) on page 592](#)  
[show chassis firmware \(M160 Router\) on page 592](#)  
[show chassis firmware \(MX240 Router\) on page 592](#)  
[show chassis firmware \(MX480 Router\) on page 593](#)  
[show chassis firmware \(MX960 Router\) on page 593](#)  
[show chassis firmware \(MX2010 Router\) on page 593](#)  
[show chassis firmware \(MX2020 Router\) on page 593](#)  
[show chassis firmware \(MX240, MX480, MX960 Router with Application Services Modular Line Card\) on page 593](#)  
[show chassis firmware \(EX4200 Switch\) on page 595](#)  
[show chassis firmware \(EX8200 Switch\) on page 595](#)  
[show chassis firmware lcc \(TX Matrix Router\) on page 595](#)  
[show chassis firmware scc \(TX Matrix Router\) on page 595](#)  
[show chassis firmware \(TX Matrix Plus Router\) on page 595](#)  
[show chassis firmware lcc \(TX Matrix Plus Router\) on page 597](#)  
[show chassis firmware sfc \(TX Matrix Plus Router\) on page 597](#)  
[show chassis firmware \(QFX Series\) on page 598](#)  
[show chassis firmware interconnect-device \(QFabric System\) on page 598](#)  
[show chassis firmware \(ACX2000 Universal Access Router\) on page 598](#)  
[show chassis firmware detail \(EX3300 Switch\) on page 598](#)  
[show chassis firmware \(MX Routers with Media Services Blade \[MSB\]\) on page 598](#)

**Output Fields** Table 45 on page 590 lists the output fields for the **show chassis firmware** command. Output fields are listed in the approximate order in which they appear.

**Table 45: show chassis firmware Output Fields**

Field Name	Field Description
Part	(MX Series, MX2010, and MX2020 routers) Chassis part name.
Type	(MX Series, MX2010, and MX2020 routers) Type of firmware: On routers: <b>ROM</b> or <b>O/S</b> . On switches: <b>uboot</b> or <b>loader</b> .
Version	(MX Series, MX2010, and MX2020 routers) Version of firmware running on the chassis part.
FPC	( <i>detail</i> option only) Number of FPC. For a standalone switch, the value is 0. For a Virtual Chassis configuration, value in the range of 0-9; refers to the member ID assigned to the switch.
Boot	( <i>detail</i> option only) Version of the SYSPLD.
PoE	( <i>detail</i> option only) Version of the PoE firmware.



Table 45: show chassis firmware Output Fields (*continued*)

Field Name	Field Description
PFE-<number>	( <i>detail</i> option only) Version of the PFE used in the switch.
PHY-	( <i>detail</i> option only) Version of the physical layer device (PHY) used in the switch.
microcode	( <i>detail</i> option only) Microcode of the physical layer devices (PHY) used in the switch.
uboot	( <i>detail</i> option only) Version of the u-boot used in the switch.
loader	( <i>detail</i> option only) Version of the loader used in the switch.



## Sample Output

```

show chassis firmware (M10 Router) user@host> show chassis firmware
Part                               Type      Version
Forwarding engine board          ROM       Juniper ROM Monitor Version 4.1b2
                                   O/S       Version 4.1I1 by tlim on 2000-04-24 11:27

show chassis firmware (M20 Router) user@host> show chassis firmware
Part                               Type      Version
System switch board              ROM       Juniper ROM Monitor Version 3.4b26
                                   O/S       Version 3.4I16 by smackie on 2000-02-29 2
FPC 1                             ROM       Juniper ROM Monitor Version 3.0b1
                                   O/S       Version 3.4I4 by smackie on 2000-02-25 21
FPC 2                             ROM       Juniper ROM Monitor Version 3.0b1
                                   O/S       Version 3.4I4 by smackie on 2000-02-25 21

show chassis firmware (M40 Router) user@host> show chassis firmware
Part                               Type      Version
System control board              ROM       Juniper ROM Monitor Version 2.0i126Copyri
                                   O/S       Version 2.0i1 by root on Thu Jul 23 00:51
FPC 5                             ROM       Juniper ROM Monitor Version 2.0i49Copyrig
                                   O/S       Version 2.0i1 by root on Thu Jul 23 00:59

show chassis firmware (M120 Router) user@host> show chassis firmware
FPC 2                             ROM       Juniper ROM Monitor Version 8.0b29
                                   O/S       Version 8.2B1 by builder on 2006-10-18 16:2
FPC 3                             ROM       Juniper ROM Monitor Version 8.0b29
                                   O/S       Version 8.2B1 by builder on 2006-10-18 16:2
FPC 4                             ROM       Juniper ROM Monitor Version 8.0b29
                                   O/S       Version 8.2B1 by builder on 2006-10-18 16:2
FEB 3                             ROM       Juniper ROM Monitor Version 8.0b29
                                   O/S       Version 8.2B1 by builder on 2006-10-18 16:1
FEB 4                             ROM       Juniper ROM Monitor Version 8.0b29
                                   O/S       Version 8.2B1 by builder on 2006-10-18 16:1

show chassis firmware (M160 Router) user@host> show chassis firmware
Part                               Type      Version
SFM 0                             ROM       Juniper ROM Monitor Version 4.0b2
                                   O/S       Version 4.0I1 by tlim on 2000-02-29 11:50
SFM 1                             ROM       Juniper ROM Monitor Version 4.0b2
                                   O/S       Version 4.0I1 by tlim on 2000-02-29 11:50
FPC 0                             ROM       Juniper ROM Monitor Version 4.0b2
                                   O/S       Version 4.0I1 by tlim on 2000-02-29 11:56
FPC 1                             ROM       Juniper ROM Monitor Version 4.0b2
                                   O/S       Version 4.0I1 by tlim on 2000-02-29 11:56
FPC 2                             ROM       Juniper ROM Monitor Version 4.0b3
                                   O/S       Version 4.0I1 by tlim on 2000-02-29 11:56

show chassis firmware (MX240 Router) user@host> show chassis firmware
Part                               Type      Version
FPC 1                             ROM       Juniper ROM Monitor Version 8.3b1
                                   O/S       Version 9.0-20080103.0 by builder on 2008-0
FPC 2                             ROM       Juniper ROM Monitor Version 8.3b1
                                   O/S       Version 9.0-20080103.0 by builder on 2008-0

```



```

show chassis firmware (MX480 Router) user@host> show chassis firmware
Part                               Type      Version
FPC 1                             ROM       Juniper ROM Monitor Version 8.3b1
                                      O/S      Version 9.0-20070916.3 by builder on 2007-0

```

```

show chassis firmware (MX960 Router) user@host> show chassis firmware
Part                               Type      Version
FPC 4                             ROM       Juniper ROM Monitor Version 8.0b8
                                      O/S      Version 8.2I59 by artem on 2006-10-31 19:22
FPC 7                             ROM       Juniper ROM Monitor Version 8.2b1
                                      O/S      Version 8.2-20061026.1 by builder on 2006-1

```

```

show chassis firmware (MX2010 Router) user@host> show chassis firmware
Part                               Type      Version
FPC 0                             ROM       Juniper ROM Monitor Version 10.0b39
                                      O/S      Version 12.3-20120718_ib_12_3_psd.0 by buil
FPC 1                             ROM       Juniper ROM Monitor Version 10.4b1
                                      O/S      Version 12.3-20120718_ib_12_3_psd.0 by buil
FPC 8                             ROM       Juniper ROM Monitor Version 10.1b2
                                      O/S      Version 12.3-20120718_ib_12_3_psd.0 by buil
FPC 9                             ROM       Juniper ROM Monitor Version 10.0b39
                                      O/S      Version 12.3-20120718_ib_12_3_psd.0 by buil
SPMB 0                            ROM       Juniper ROM Monitor Version 12.1b1
                                      O/S      Version 12.3-20120718_ib_12_3_psd.0 by buil
SPMB 1                            ROM       Juniper ROM Monitor Version 12.1b1
                                      O/S      Version 12.3-20120718_ib_12_3_psd.0 by buil

```

```

show chassis firmware (MX2020 Router) user@host> show chassis firmware
Part                               Type      Version
FPC 0                             ROM
FPC 1                             ROM
FPC 2                             ROM
FPC 3                             ROM
FPC 4                             ROM
FPC 5                             ROM
FPC 6                             ROM
FPC 7                             ROM
FPC 8                             ROM
FPC 9                             ROM
FPC 10                            ROM
FPC 11                            ROM
FPC 12                            ROM
FPC 13                            ROM
FPC 14                            ROM
FPC 15                            ROM
FPC 16                            ROM
FPC 17                            ROM
FPC 18                            ROM
FPC 19                            ROM
SPMB 0                            ROM       Juniper ROM Monitor Version 11.2b1
                                      O/S      Version 12.3I5 by psampath on 2012-11-04 03
SPMB 1                            ROM       Juniper ROM Monitor Version 12.1b1
                                      O/S      Version 12.3I5 by psampath on 2012-11-04 03

```

```

show chassis firmware user@host> show chassis firmware

```



	Part	Type	Version
(MX240, MX480, MX960 Router with	FPC 1	ROM	Juniper ROM Monitor Version 12.1b1
		O/S	Version 12.2I21 by manish on 2012-06-19 17:



## Application Services Modular Line Card)

**show chassis firmware** (EX4200 Switch)      user@switch> **show chassis firmware**

Part	Type	Version
FPC 0	uboot	U-Boot 1.1.6 (Feb 6 2008 - 11:27:42)
	loader	FreeBSD/PowerPC U-Boot bootstrap loader 2.1
FPC 1	uboot	U-Boot 1.1.6 (Feb 6 2008 - 11:27:42)
	loader	FreeBSD/PowerPC U-Boot bootstrap loader 2.1
FPC 2	uboot	U-Boot 1.1.6 (Feb 6 2008 - 11:27:42)
	loader	FreeBSD/PowerPC U-Boot bootstrap loader 2.1

**show chassis firmware** (EX8200 Switch)      user@switch> **show chassis firmware**

Part	Type	Version
FPC 0	U-Boot	U-Boot 1.1.6 (Mar 25 2009 - 06:13:12) 2.4.0
	loader	FreeBSD/PowerPC U-Boot bootstrap loader 2.2
FPC 3	U-Boot	U-Boot 1.1.6 (Dec 4 2009 - 13:17:34) 3.1.0
	loader	FreeBSD/PowerPC U-Boot bootstrap loader 2.2
FPC 5	U-Boot	U-Boot 1.1.6 (Mar 25 2009 - 06:13:12) 2.4.0
	loader	FreeBSD/PowerPC U-Boot bootstrap loader 2.2
FPC 7	U-Boot	U-Boot 1.1.6 (Feb 6 2009 - 05:31:46) 2.4.0
	loader	FreeBSD/PowerPC U-Boot bootstrap loader 2.2
Routing Engine 0	U-Boot	U-Boot 1.1.6 (Mar 25 2009 - 06:13:12) 2.4.0
	loader	FreeBSD/PowerPC U-Boot bootstrap loader 2.2
Routing Engine 1	U-Boot	U-Boot 1.1.6 (Mar 25 2009 - 06:13:12) 2.4.0
	loader	FreeBSD/PowerPC U-Boot bootstrap loader 2.2

**show chassis firmware** lcc (TX Matrix Router)      user@host> **show chassis firmware lcc 0**  
lcc0-re0:

Part	Type	Version
FPC 1	ROM	Juniper ROM Monitor Version 6.4b18
	O/S	Version 7.0-20040804.0 by builder on 2004-0
FPC 2	ROM	Juniper ROM Monitor Version 6.4b20
	O/S	Version 7.0-20040804.0 by builder on 2004-0
SPMB 0	ROM	Juniper ROM Monitor Version 6.4b18
	O/S	Version 7.0-20040804.0 by builder on 2004-0

**show chassis firmware** scc (TX Matrix Router)      user@host> **show chassis firmware scc**  
scc-re0:

Part	Type	Version
SPMB 0	ROM	Juniper ROM Monitor Version 6.4b18
	O/S	Version 7.0-20040804.0 by builder on 2004-0

**show chassis firmware** (TX Matrix Plus Router)      user@host> **show chassis firmware**  
sfc0-re0:

Part	Type	Version
Global FPC 4		
Global FPC 6		
Global FPC 7		
Global FPC 12		



```

Global FPC 14
Global FPC 15
Global FPC 20
Global FPC 21
Global FPC 22
Global FPC 23
Global FPC 24
Global FPC 25
Global FPC 26
Global FPC 28
Global FPC 29
Global FPC 31
SPMB 0          ROM      Juniper ROM Monitor Version 9.5b1
                  O/S      Version 9.6-20090507.0 by builder on 2009-0
SPMB 1          ROM      Juniper ROM Monitor Version 9.5b1
                  O/S      Version 9.6-20090507.0 by builder on 2009-0

```

## lcc0-re1:

```

-----
Part      Type      Version
FPC 4     ROM        Juniper ROM Monitor Version 9.0b2
          O/S        Version 9.6-20090507.0 by builder on 2009-0
FPC 6     ROM        Juniper ROM Monitor Version 9.0b2
          O/S        Version 9.6-20090507.0 by builder on 2009-0
FPC 7     ROM        Juniper ROM Monitor Version 9.0b2
          O/S        Version 9.6-20090507.0 by builder on 2009-0
SPMB 0     ROM        Juniper ROM Monitor Version 9.5b1
          O/S        Version 9.6-20090507.0 by builder on 2009-0
SPMB 1     ROM        Juniper ROM Monitor Version 9.5b1
          O/S        Version 9.6-20090507.0 by builder on 2009-0

```

## lcc1-re1:

```

-----
Part      Type      Version
FPC 4     ROM        Juniper ROM Monitor Version 9.0b2
          O/S        Version 9.6-20090507.0 by builder on 2009-0
FPC 6     ROM        Juniper ROM Monitor Version 9.0b2
          O/S        Version 9.6-20090507.0 by builder on 2009-0
FPC 7     ROM        Juniper ROM Monitor Version 9.0b2
          O/S        Version 9.6-20090507.0 by builder on 2009-0
SPMB 0     ROM        Juniper ROM Monitor Version 9.5b1
          O/S        Version 9.6-20090507.0 by builder on 2009-0
SPMB 1     ROM        Juniper ROM Monitor Version 9.5b1
          O/S        Version 9.6-20090507.0 by builder on 2009-0

```

## lcc2-re1:

```

-----
Part      Type      Version
FPC 4     ROM        Juniper ROM Monitor Version 9.0b2
          O/S        Version 9.6-20090507.0 by builder on 2009-0
FPC 5     ROM        Juniper ROM Monitor Version 9.0b2
          O/S        Version 9.6-20090507.0 by builder on 2009-0
FPC 6     ROM        Juniper ROM Monitor Version 9.0b2
          O/S        Version 9.6-20090507.0 by builder on 2009-0
FPC 7     ROM        Juniper ROM Monitor Version 7.5b4
          O/S        Version 9.6-20090507.0 by builder on 2009-0
SPMB 0     ROM        Juniper ROM Monitor Version 9.5b1
          O/S        Version 9.6-20090507.0 by builder on 2009-0
SPMB 1     ROM        Juniper ROM Monitor Version 9.5b1
          O/S        Version 9.6-20090507.0 by builder on 2009-0

```



lcc3-re1:

```

-----
Part                Type      Version
FPC 0               ROM      Juniper ROM Monitor Version 9.0b2
                  O/S      Version 9.6-20090507.0 by builder on 2009-0
FPC 1               ROM      Juniper ROM Monitor Version 9.0b2
                  O/S      Version 9.6-20090507.0 by builder on 2009-0
FPC 2               ROM      Juniper ROM Monitor Version 9.0b2
                  O/S      Version 9.6-20090507.0 by builder on 2009-0
FPC 4               ROM      Juniper ROM Monitor Version 7.5b4
                  O/S      Version 9.6-20090507.0 by builder on 2009-0
FPC 5               ROM      Juniper ROM Monitor Version 9.0b2
                  O/S      Version 9.6-20090507.0 by builder on 2009-0
FPC 7               ROM      Juniper ROM Monitor Version 9.0b2
                  O/S      Version 9.6-20090507.0 by builder on 2009-0
SPMB 0              ROM      Juniper ROM Monitor Version 9.5b1
                  O/S      Version 9.6-20090507.0 by builder on 2009-0
SPMB 1              ROM      Juniper ROM Monitor Version 9.5b1
                  O/S      Version 9.6-20090507.0 by builder on 2009-0

```

show chassis firmware  
lcc (TX Matrix Plus  
Router)

```

user@host> show chassis firmware lcc 0
lcc0-re1:

```

```

-----
Part                Type      Version
FPC 4               ROM      Juniper ROM Monitor Version 9.0b2
                  O/S      Version 9.6-20090507.0 by builder on 2009-0
FPC 6               ROM      Juniper ROM Monitor Version 9.0b2
                  O/S      Version 9.6-20090507.0 by builder on 2009-0
FPC 7               ROM      Juniper ROM Monitor Version 9.0b2
                  O/S      Version 9.6-20090507.0 by builder on 2009-0
SPMB 0              ROM      Juniper ROM Monitor Version 9.5b1
                  O/S      Version 9.6-20090507.0 by builder on 2009-0
SPMB 1              ROM      Juniper ROM Monitor Version 9.5b1
                  O/S      Version 9.6-20090507.0 by builder on 2009-0

```

show chassis firmware  
sfc (TX Matrix Plus  
Router)

```

user@host> show chassis firmware sfc 0
sfc0-re0:

```

```

-----
Part                Type      Version
Global FPC 4
Global FPC 6
Global FPC 7
Global FPC 12
Global FPC 14
Global FPC 15
Global FPC 20
Global FPC 21
Global FPC 22
Global FPC 23
Global FPC 24
Global FPC 25
Global FPC 26
Global FPC 28
Global FPC 29
Global FPC 31
SPMB 0              ROM      Juniper ROM Monitor Version 9.5b1
                  O/S      Version 9.6-20090507.0 by builder on 2009-0
SPMB 1              ROM      Juniper ROM Monitor Version 9.5b1
                  O/S      Version 9.6-20090507.0 by builder on 2009-0

```



**show chassis firmware  
(QFX Series)**

```
user@switch> show chassis firmware
Part                               Type      Version
FPC 0
Routing Engine 0                  U-Boot   U-Boot 1.1.6 (Sep 15 2010 - 02:11:11) 1.0.5
loader                            FreeBSD/MIPS U-Boot bootstrap loader 0.1
```

**show chassis firmware  
interconnect-device  
(QFabric System)**

```
user@switch> show chassis firmware interconnect-device interconnect1
Part                               Type      Version
Routing Engine 0                  U-Boot   U-Boot 1.1.6 (May 10 2011 - 04:52:59) 1.1.1
loader                            FreeBSD/MIPS U-Boot bootstrap loader 0.1
Routing Engine 1                  U-Boot   U-Boot 1.1.6 (May 10 2011 - 04:52:59) 1.1.1
loader                            FreeBSD/MIPS U-Boot bootstrap loader 0.1
```

**show chassis firmware  
(ACX2000 Universal  
Access Router)**

```
user@switch> show chassis firmware
Part                               Type      Version
FPC                                O/S       Version 12.2I13 by jisjoy on 2012-05-29 06:
FEB                                O/S       Version 12.2I13 by jisjoy on 2012-05-29 06:
```

**show chassis firmware  
detail (EX3300  
Switch)**

```
user@switch> show chassis firmware detail
FPC 0
  Boot SYSPLD                      3
  PoE firmware                     4.1.6
  PFE-0                            3
  PFE-1                            3
  PHY
    microcode                      0x514
  Boot Firmware
    uboot                          U-Boot 1.1.6 (Aug 21 2011 - 01:45:26) 1.0.0
    loader                         FreeBSD/arm U-Boot loader 1.0
```

**show chassis firmware  
(MX Routers with  
Media Services Blade  
[MSB])**

```
user@switch> show chassis firmware
Part                               Type      Version
FPC 1                              ROM        Juniper ROM Monitor Version 12.1b1
O/S                                Version 12.2I21 by manish on 2012-06-19 17:
```



## show chassis fpc

<b>Syntax</b>	show chassis fpc <detail <slot>>   <pic-status <slot>>
<b>Syntax (EX Series Switches)</b>	show chassis fpc <detail <fpc-slot>>   <pic-status <fpc-slot>> <fpc-slot>
<b>Syntax (T4000 Routers)</b>	show chassis fpc <detail <fpc-slot>> <pic-status <fpc-slot>>
<b>Syntax (TX Matrix and TX Matrix Plus Routers)</b>	show chassis fpc <detail <fpc-slot>>   <pic-status <fpc-slot>> <slot>
<b>Syntax (MX Series Routers)</b>	show chassis fpc <detail <slot>>   <pic-status <slot>> <all-members> <local> <member <i>member-id</i> >
<b>Syntax (MX2010 3D Universal Edge Routers)</b>	show chassis fpc <slot> detail   <detail <slot>>   <pic-status <slot>> <fpc-slot>
<b>Syntax (MX2020 3D Universal Edge Routers)</b>	show chassis fpc < slot> detail   <detail <slot>>   <pic-status <slot>> <fpc-slot>
<b>Syntax (QFX Series)</b>	show chassis fpc <detail> <interconnect-device <i>name</i> <fpc-slot <i>fpc-slot</i> >> <node-device <i>name</i> >
<b>Syntax (PTX Series Packet Transport Switches)</b>	show chassis fpc <detail <fpc-slot>>   <pic-status <fpc-slot>> <fpc-slot>
<b>Syntax (ACX Series Universal Access Routers)</b>	show chassis fpc <detail <fpc-slot>>   <pic-status <fpc-slot>> <fpc-slot>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for QFX Series. Command introduced in Junos OS Release 12.1 for PTX Series Packet Transport Switches. Command introduced in Junos OS Release 12.2 for ACX Series Universal Access Routers. Command introduced in Junos OS Release 12.3 for MX2020 3D Universal Edge Routers. Command introduced in Junos OS Release 12.3 for MX2010 3D Universal Edge Routers.



**Description** Display status information about the installed Flexible PIC Concentrators (FPCs) and PICs.

**Options** **none**—Display status information for all FPCs. On a TX Matrix router, display status information for all FPCs on the attached T640 routers in the routing matrix. On a TX Matrix Plus router, display status information for all FPCs on the attached T1600 routers in the routing matrix.



**NOTE:** In EX8200 switches, line cards initialize Packet Forwarding Engine during startup. If an error occurs during hardware initialization, the FPCs with bad hardware parts power down after transferring the debug information to the Routing Engine. The Routing Engine marks the FPC offline, logs the error in system log messages (/var/log/messages), and generates an alarm to inform the user.

See the following sample output:

```
user@host> show chassis fpc
```

Utilization (%)	Temp	CPU	Utilization (%)	Memory
Slot State	(C)	Total	Interrupt	DRAM (MB) Heap
Buffer				
0 Empty				
1 Empty				
2 Empty				
3 Empty				
4 Empty				
5 Offline	---	Hard FPC error---		
6 Empty				
7 Online	26	4	0	1024 0
32				

The following sample output shows the alarm raised for the failed FPCs.

```
user@host > show chassis alarms
4 alarms currently active
```

Alarm time	Class	Description
2011-03-24 00:52:51 UTC	Major	FPC 5 Hard errors
2011-03-24 00:52:31 UTC	Major	Fan Tray Failure
2011-03-24 00:52:31 UTC	Major	Fan Tray Failure
2011-03-24 00:51:26 UTC	Minor	Loss of communication with Backup RE





**NOTE:** On T4000 routers, when you include the **enhanced-mode** statement at the **[edit chassis network-services]** hierarchy level and reboot the system, only the T4000 Type 5 FPCs present on the router become online while the remaining FPCs are offline, and FPC misconfiguration alarms are generated. The **show chassis alarm** command output displays FPC misconfiguration (**FPC *fpc-slot* misconfig**) as the reason for the generation the alarms.

The following sample output shows the FPC status after the **enhanced-mode** statement is configured on the T4000 router. The T4000 Type 5 FPC present in slot 5 becomes online while the remaining FPCs are offline.

```
user@host> show chassis fpc
```

	Temp	CPU Utilization (%)		Memory	
Utilization (%)					
Slot State	(C)	Total	Interrupt	DRAM (MB)	Heap
Buffer					
0 offline		---FPC misconfiguration---			
1 offline		---FPC misconfiguration---			
2 offline		---FPC misconfiguration---			
3 Empty					
4 Empty					
5 Online	66	50	0	2816	29
27					

The following sample output shows FPC misconfiguration alarms.

```
user@host > show chassis alarms
3 alarms currently active
Alarm time          Class  Description
2011-03-24 00:52:51 PST Major  FPC 1 misconfig
2011-03-24 00:52:31 PST Major  FPC 2 misconfig
2011-03-24 00:52:31 PST Major  FPC 3 misconfig
```

**detail**—(Optional) Display detailed status information for all FPCs or for the FPC in the specified slot (see ***fpc-slot*** or ***slot***).

**all-members**—(MX Series routers only) (Optional) Display status information for all FPCs on all members of the Virtual Chassis configuration.

**interconnect-device *name***—(QFabric systems only) (Optional) Display status information for all FPCs on the Interconnect device.

***fpc-slot***—(Optional) FPC slot number:

- (TX Matrix and TX Matrix Plus router only)—On a TX Matrix router, if you specify the number of the T640 router (or line-card chassis) by using the ***lcc-number*** option (the recommended method), replace ***fpc-slot*** with a value from 0 through 7. Otherwise, replace ***fpc-slot*** with a value from 0 through 31. Likewise, on a TX Matrix Plus router, if you specify the number of the T1600 router (or line-card chassis)



by using the **lcc number** option (the recommended method), replace **fpc-slot** with a value from 0 through 7. Otherwise, replace **fpc-slot** with a value from 0 through 31. For example, the following commands have the same result:

```
user@host> show chassis fpc detail 1 lcc 1
user@host> show chassis fpc detail 9
```

- M120 router—Replace **fpc-slot** with a value from 0 through 5.
- MX80 router—Replace **fpc-slot** with a value from 0 through 1.
- MX240 router—Replace **fpc-slot** with a value from 0 through 2.
- MX480 router—Replace **fpc-slot** with a value from 0 through 5.
- MX-960 router—Replace **fpc-slot** with a value from 0 through 11.
- MX2010 router—Replace **fpc-slot-number** with a value from 0 through 9.
- MX2020 router—Replace **fpc-slot-number** with a value from 0 through 19.
- Other routers—Replace **fpc-slot** with a value from 0 through 7.
- EX Series switches:
  - EX3200 switches and EX4200 standalone switches—Replace **fpc-slot** with 0.
  - EX4200 switches in a Virtual Chassis configuration—Replace **fpc-slot** with a value from 0 through 9.
  - EX6210 switches—Replace **fpc-slot** with a value from 0 through 9.
  - EX8208 switches—Replace **fpc-slot** with a value from 0 through 7.
  - EX8216 switches—Replace **fpc-slot** with a value from 0 through 15.
- QFX Series:
  - QFX3500 switches—Replace **fpc-slot** with 0.
  - QFabric systems—Replace **fpc-slot** with 0 through 31 on the Interconnect device.
- PTX Series Packet Transport Switches:
  - PTX5000 Packet Transport Switch—Replace **fpc-slot** with a value from 0 through 7.
- ACX Series Universal Access Routers:
  - ACX1000 and ACX2000 Universal Access Routers—Replace **fpc-slot** with 0.

**local**—(MX Series routers only) (Optional) Display status information for all FPCs on the local Virtual Chassis member.

**member member-id**—(MX Series routers only) (Optional) Display status information for all FPCs on the specified member of the Virtual Chassis configuration. Replace **member-id** with a value of 0 or 1.

**node-device name**—(QFabric systems only) (Optional) Display status information for each Node device. Each Node device is equivalent to an FPC.



**pic-status**—(Optional) Display status information for all PICs or for the PIC in the specified slot (see *fpc-slot*).



**NOTE:** On T1600 routers, Type 4 FPCs with ASICs based on the SL2.0 chipset do not support the 10-Gigabit Ethernet LAN/WAN PIC with SFP+ (10x10GE [LAN/WAN] SFPP). If you issue the `show chassis fpc` command with the `pic-status` option, the CLI displays the string “Not Supported” for 10x10GE(LAN/WAN) SFPP PICs installed on such FPCs. The following is a sample output:

```
user@host> show chassis fpc pic-status
Slot 0   Online      E2-FPC Type 1
  PIC 0   Online      1x G/E SFP, 1000 BASE
  PIC 1   Online      Adaptive Services-II
  PIC 2   Online      1x G/E IQ, 1000 BASE
  PIC 3   Online      1x G/E IQ, 1000 BASE
Slot 1   Online      FPC Type 3-ES
  PIC 0   Present     UNUSED- Not Supported
Slot 2   Online      FPC Type 4-ES
  PIC 0   Offline     4x OC-192 SONET XFP
  PIC 1   Present     10x10GE(LAN/WAN) SFPP- Not Supported
<<<<<<
Slot 4   Offline     FPC Type 1-ES
Slot 5   Offline     FPC Type 2-ES
Slot 6   Online      E2-FPC Type 3
  PIC 0   Online      1x OC-192 SONET XFP
  PIC 1   Online      4x OC-48 SONET
  PIC 2   Online      4x OC-48 SONET
  PIC 3   Online      MultiServices 500
Slot 7   Online      FPC Type 4-ES
  PIC 0   Online      4x 10GE (LAN/WAN) XFP
  PIC 1   Online      4x 10GE (LAN/WAN) XFP
```

In addition, an entry is logged in the system log messages (/var/log/messages) that the PIC is not supported. The following is a sample message logged in the system log:

```
Apr  5 08:47:36  router1 chassisd[2770]: CHASSISD_UNSUPPORTED_PIC:
PIC 1 in FPC 2 (type 763, version 257) is not supported
```

**lcc number**—(TX Matrix and TX Matrix Plus router only) (Optional) On a TX Matrix router, display status information for a T640 router (or line-card chassis) that is connected to the TX Matrix router. On a TX Matrix Plus router, display status information for a T1600 router (or line-card chassis) that is connected to the TX Matrix Plus router. Replace *number* with a value from 0 through 3.

**Required Privilege Level** view

**Related Documentation**

- [request chassis fpc on page 320](#)
- `show chassis fpc-feb-connectivity`
- `show chassis fabric fpcs`



- Configuring the Junos OS to Resynchronize FPC Sequence Numbers with Active FPCs when an FPC Comes Online
- MX960 Flexible PIC Concentrator Description
- ACX2000 and ACX2100 Routers Hardware and CLI Terminology Mapping
- enhanced-mode

#### List of Sample Output

[show chassis fpc \(EX6210 Switch\) on page 608](#)  
[show chassis fpc \(M10 Router\) on page 608](#)  
[show chassis fpc \(M20 Router\) on page 608](#)  
[show chassis fpc detail \(M Series Routers\) on page 608](#)  
[show chassis fpc detail \(MX80 Router\) on page 608](#)  
[show chassis fpc \(MX240 Router\) on page 609](#)  
[show chassis fpc \(MX480 Router\) on page 609](#)  
[show chassis fpc \(MX480 Router with 100-Gigabit Ethernet CFP\) on page 609](#)  
[show chassis fpc pic-status \(MX480 Router with 100-Gigabit Ethernet CFP\) on page 609](#)  
[show chassis fpc \(MX480 Router with MPC4E\) on page 610](#)  
[show chassis fpc detail \(MX480 Router with MPC4E\) on page 610](#)  
[show chassis fpc pic-status \(MX480 Router with MPC4E\) on page 610](#)  
[show chassis fpc \(MX960 Router\) on page 611](#)  
[show chassis fpc \(MX240, MX480, MX960 Routers with Application Services Modular Line Card\) on page 611](#)  
[show chassis fpc \(MX240, MX480, MX960 with Application Services Modular Line Card\) on page 611](#)  
[show chassis fpc \(MX2010 Routers\) on page 612](#)  
[show chassis fpc \(MX2020 Routers\) on page 612](#)  
[show chassis fpc \(MX2020 Router with MPC4E\) on page 612](#)  
[show chassis fpc detail \(MX2020 Router with MPC4E\) on page 613](#)  
[show chassis fpc pic-status \(MX2020 Router with MPC4E\) on page 613](#)  
[show chassis fpc detail \(MX Series Routers\) on page 614](#)  
[show chassis fpc \(Hardware Not Supported\) on page 614](#)  
[show chassis fpc detail \(Hardware Not Supported\) on page 614](#)  
[show chassis fpc pic-status on page 615](#)  
[show chassis fpc pic-status \(M Series Routers\) on page 615](#)  
[show chassis fpc pic-status \(M120 Router\) on page 615](#)  
[show chassis fpc pic-status \(MX240, MX480, and MX960 Routers with Application Services Modular Line Card\) on page 615](#)  
[show chassis fpc lcc \(TX Matrix Router\) on page 616](#)  
[show chassis fpc pic-status \(TX Matrix Router\) on page 616](#)  
[show chassis fpc pic-status lcc \(TX Matrix Router\) on page 616](#)  
[show chassis fpc \(TX Matrix Plus Router\) on page 617](#)  
[show chassis fpc lcc \(TX Matrix Plus Router\) on page 617](#)  
[show chassis fpc detail \(TX Matrix Plus Router\) on page 617](#)  
[show chassis fpc pic-status \(TX Matrix Plus Router\) on page 620](#)  
[show chassis fpc \(T1600 Router\) on page 621](#)  
[show chassis fpc detail \(T1600 Router\) on page 621](#)  
[show chassis fpc slot \(T1600 Router\) on page 621](#)  
[show chassis fpc pic-status \(T1600 Router\) on page 622](#)



[show chassis fpc \(T4000 Router\) on page 622](#)  
[show chassis fpc detail \(T4000 Router\) on page 622](#)  
[show chassis fpc pic-status \(T4000 Router\) on page 623](#)  
[show chassis fpc \(QFX Series\) on page 623](#)  
[show chassis fpc detail \(QFX3500 Switches\) on page 623](#)  
[show chassis fpc pic-status \(QFX3500 Switches\) on page 623](#)  
[show chassis fpc interconnect-device \(QFabric System\) on page 623](#)  
[show chassis fpc interconnect-device \(QFabric System\) on page 624](#)  
[show chassis fpc interconnect-device detail \(QFabric System\) on page 624](#)  
[show chassis fpc pic-status interconnect-device \(QFabric System\) on page 624](#)  
[show chassis fpc pic-status node-device \(QFabric System\) on page 625](#)  
[show chassis fpc \(PTX5000 Packet Transport Switch\) on page 625](#)  
[show chassis fpc detail \(PTX5000 Packet Transport Switch\) on page 625](#)  
[show chassis fpc pic-status \(PTX5000 Packet Transport Switch\) on page 626](#)  
[show chassis fpc \(ACX2000 Universal Access Router\) on page 627](#)  
[show chassis fpc 0 \(ACX2000 Universal Access Router\) on page 627](#)  
[show chassis fpc detail \(ACX2000 Universal Access Router\) on page 627](#)  
[show chassis fpc pic-status \(ACX2000 Universal Access Router\) on page 627](#)  
[show chassis FPC 1 \(MX Routers with Media Services Blade \[MSB\]\) on page 627](#)  
[show chassis FPC 1 detail \(MX Routers with Media Services Blade \[MSB\]\) on page 627](#)

**Output Fields** Table 46 on page 605 lists the output fields for the **show chassis fpc** command. Output fields are listed in the approximate order in which they appear.

**Table 46: show chassis fpc Output Fields**

Field Name	Field Description	Level of Output
<b>Slot or Slot State</b>	<p>Slot number and state. The state can be one of the following conditions:</p> <ul style="list-style-type: none"> <li>• <b>Dead</b>—Held in reset because of errors.</li> <li>• <b>Diag</b>—Slot is being ignored while the FPC is running diagnostics.</li> <li>• <b>Dormant</b>—Held in reset.</li> <li>• <b>Empty</b>—No FPC is present.</li> <li>• <b>Offline</b>—(PTX Series Packet Transport Switches only) One of the following two states is displayed: <ul style="list-style-type: none"> <li>• <b>FPC offlined due to unreachable destinations</b></li> <li>• <b>FPC Offlined due to degraded FPC action</b></li> </ul> </li> <li>• <b>Online</b>—FPC is online and running.</li> <li>• <b>Present</b>—FPC is detected by the chassis daemon but either is not supported by the current version of Junos OS or is inserted in the wrong slot. The output also states either <b>Hardware Not Supported</b> or <b>Hardware Not In Right Slot</b>. The FPC is coming up but not yet online.</li> <li>• <b>Probed</b>—Probe is complete; awaiting restart of the Packet Forwarding Engine.</li> <li>• <b>Probe-wait</b>—Waiting to be probed.</li> </ul>	all levels
<b>Logical slot</b>	Slot number.	all levels
<b>Temp (C) or Temperature</b>	Temperature of the air passing by the FPC, in degrees Celsius or in both Celsius and Fahrenheit.	all levels all levels



Table 46: show chassis fpc Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Temperature (PTX Series)</b>	On PTX Series Packet Transport Switches, temperature details are provided in degrees Celsius and Fahrenheit. Output includes: <ul style="list-style-type: none"> <li>• Temperature (PMB)—Temperature of the air passing by the Processor Mezzanine Board (PMB) at the bottom of the FPC.</li> <li>• Temperature (Intake)—Temperature of the air flowing into the chassis.</li> <li>• Temperature (Exhaust)—Exhaust temperatures for multiple zones (Exhaust A and Exhaust B).</li> <li>• Temperature (TLn)—Temperature of the specified Lookup ASIC (TL) of the packet forwarding engine on the FPC.</li> <li>• Temperature (TQn)—Temperature of the specified Queuing and Memory Interface ASIC (TQ) of the packet forwarding engine on the FPC.</li> </ul>	<b>detail</b>
<b>Total CPU Utilization (%)</b>	Total percentage of CPU being used by the FPC's processor.	all levels
<b>Interrupt CPU Utilization (%)</b>	Of the total CPU being used by the FPC's processor, the percentage being used for interrupts.	none specified
<b>Memory DRAM (MB)</b>	Total DRAM, in megabytes, available to the FPC's processor.	none specified
<b>Heap Utilization (%)</b>	Percentage of heap space (dynamic memory) being used by the FPC's processor. If this number exceeds 80 percent, there may be a software problem (memory leak).  <b>NOTE:</b> On MX Series routers in a broadband edge environment, heap utilization levels higher than 70 percent can affect unified ISSU, router stability, or scaling capability.	none specified
<b>Buffer Utilization (%)</b>	Percentage of buffer space being used by the FPC's processor for buffering internal messages.	none specified
<b>Total CPU DRAM</b>	Amount of DRAM available to the FPC's CPU.	<b>detail</b>
<b>Total RLDRAM</b>	Amount of reduced latency dynamic random access memory (RLDRAM) available to the FPC CPU.	<b>detail</b>
<b>Total DDR DRAM</b>	Amount of double data rate dynamic random access memory (DDR DRAM) available to the FPC CPU.	<b>detail</b>
<b>Total SRAM</b>	Amount of static RAM (SRAM) used by the FPC's CPU.	<b>detail</b>
<b>Total SDRAM</b>	Total amount of memory used for storing packets and notifications.	<b>detail</b>
<b>I/O Manager ASICs information</b>	I/O Manager version number, manufacturer, and part number.	<b>detail</b>
<b>Start time</b>	Time when the Routing Engine detected that the FPC was running.	<b>detail</b>



Table 46: show chassis fpc Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Uptime</b>	How long the Routing Engine has been connected to the FPC and, therefore, how long the FPC has been up and running.	<b>detail</b>
<b>PIC type</b>	( <b>pic-status</b> output only) Type of PIC.	none specified



## Sample Output

### show chassis fpc (EX6210 Switch)

```
user@switch> show chassis fpc
```

Slot	State	Temp (C)	CPU Total	Utilization (%) Interrupt	Memory DRAM (MB)	Utilization (%) Heap	Buffer
0	Empty						
1	Online	7	5	0	1024	0	32
2	Empty						
3	Empty						
4	Online	25	17	2	2048	0	30
5	Online	25	3	0	2048	0	24
6	Online	6	5	0	1024	0	32
7	Empty						
8	Empty						
9	Online	8	7	0	1024	0	32

### show chassis fpc (M10 Router)

```
user@host> show chassis fpc
```

FPC status:

Slot	State	Temp (C)
0	Online	27
1	Online	28

### show chassis fpc (M20 Router)

```
user@host> show chassis fpc
```

FPC status:

Slot	State	Temp (C)	CPU Total	Utilization (%) Interrupt	Memory DRAM (MB)	Utilization (%) Heap	Buffer
0	Empty	0	0	0	0	0	0
1	Online	38	0	0	8	0	4
2	Online	35	0	0	8	0	3
3	Empty	0	0	0	0	0	0

### show chassis fpc detail (M Series Routers)

```
user@host> show chassis fpc detail 1
```

Slot 1 information:

State	Online
Temperature	48 degrees C
Total CPU DRAM	32 MB
Total SRAM	4 MB
Total SDRAM	256 MB
I/O Manager ASICs information	Version 2.0, Foundry IBM, Part number 0
I/O Manager ASICs information	Version 2.0, Foundry IBM, Part number 0
Start time	2000-02-08 02:18:49 UTC
Uptime	14 hours, 41 minutes, 41 seconds

### show chassis fpc detail (MX80 Router)

```
user@host> show chassis fpc detail
```

Slot 0 information:

State	Online
Temperature	47 degrees C / 116 degrees F
Total CPU DRAM	1024 MB
Total SRAM	331 MB
Total SDRAM	1280 MB
Start time	2010-02-08 12:25:33 PST
Uptime	2 hours, 13 minutes, 19 seconds

Slot 1 information:

State	Online
Temperature	47 degrees C / 116 degrees F



```

Total CPU DRAM          1024 MB
Total SRAM              331 MB
Total SDRAM            1280 MB
Start time              2010-02-08 12:25:33 PST
Uptime                  2 hours, 13 minutes, 19 seconds

```

#### show chassis fpc (MX240 Router)

```

user@host> show chassis fpc

```

Slot	State	Temp	CPU (C)	Utilization (%) Total	Interrupt	Memory DRAM (MB)	Utilization (%) Heap	Buffer
0	Empty							
1	Online		34	6	0	1024	18	30
2	Online		33	9	0	1024	24	30

#### show chassis fpc (MX480 Router)

```

user@host> show chassis fpc

```

Slot	State	Temp (C)	CPU Total	Utilization (%) Interrupt	Memory DRAM (MB)	Utilization (%) Heap	Buffer
0	Empty						
1	Online	36	9	0	1024	17	57
2	Empty						
3	Empty						
4	Empty						
5	Empty						

#### show chassis fpc (MX480 Router with 100-Gigabit Ethernet CFP)

```

user@host> show chassis fpc

```

Slot	State	Temp (C)	CPU Total	Utilization (%) Interrupt	Memory DRAM (MB)	Utilization (%) Heap	Buffer
0	Online	33	4	0	2048	10	13
1	Online	36	7	0	2048	16	13
2	Online	29	6	0	1024	27	29
3	Online	33	0	0	0	0	0
4	Online	36	7	0	2048	19	13
5	Online	34	31	11	2048	14	13

#### show chassis fpc pic-status (MX480 Router with

```

user@host> show chassis fpc pic-status
Slot 1  Online      MPC Type 3
PIC 2   Online      1X100GE CFP
Slot 2  Online      DPCE 40x 1GE R EQ

```



## 100-Gigabit Ethernet CFP)

```

PIC 0 Online 10x 1GE(LAN) EQ
PIC 1 Online 10x 1GE(LAN) EQ
PIC 2 Online 10x 1GE(LAN) EQ
PIC 3 Online 10x 1GE(LAN) EQ
Slot 3 Online MPC Type 3
PIC 0 Online 1X100GE CFP
PIC 2 Online 1X100GE CFP
Slot 4 Online MPC Type 3
PIC 0 Online 1X100GE CFP
PIC 2 Online 1X100GE CFP
Slot 5 Online MPC Type 2 3D EQ
PIC 0 Online 2x 10GE XFP
PIC 1 Online 2x 10GE XFP
PIC 2 Online 10x 1GE(LAN) SFP
PIC 3 Online 10x 1GE(LAN) SFP

```

show chassis fpc  
(MX480 Router with MPC4E)

```

user@host> show chassis fpc
      Temp CPU Utilization (%) Memory Utilization (%)
Slot State      (C) Total Interrupt  DRAM (MB) Heap      Buffer
0 Empty
1 Empty
2 Online        38      7          0      2048      19      14
3 Online        39      8          0      2048      18      14
4 Online        39      7          0      2048      17      14
5 Empty

```

show chassis fpc detail  
(MX480 Router with MPC4E)

```

user@host> show chassis fpc detail
Slot 2 information:
State Online
Temperature 38
Total CPU DRAM 2048 MB
Total RDRAM 1036 MB
Total DDR DRAM 11264 MB
Start time: 2013-02-18 05:06:57 PST
Uptime: 17 hours, 41 minutes, 9 seconds
Max Power Consumption 610 Watts
Slot 3 information:
State Online
Temperature 38
Total CPU DRAM 2048 MB
Total RDRAM 1036 MB
Total DDR DRAM 11264 MB
Start time: 2013-02-18 05:07:00 PST
Uptime: 17 hours, 41 minutes, 6 seconds
Max Power Consumption 610 Watts
Slot 4 information:
State Diagnostics
Temperature 37
Total CPU DRAM 0 MB
Total RDRAM 0 MB
Total DDR DRAM 0 MB
Max Power Consumption 520 Watts

```

show chassis fpc  
pic-status (MX480  
Router with MPC4E)

```

user@host> show chassis fpc pic-status
Slot 2 Online MPC4E 3D 32XGE
PIC 0 Online 8X10GE SFPP
PIC 1 Online 8X10GE SFPP
PIC 2 Online 8X10GE SFPP
PIC 3 Online 8X10GE SFPP

```



```

Slot 3  Online      MPC4E 3D 2CGE+8XGE
      PIC 0  Online      4x10GE SFPP
      PIC 1  Online      1X100GE CFP
      PIC 2  Online      4x10GE SFPP
      PIC 3  Online      1X100GE CFP
Slot 4  Diagnostics  MPCE Type 3 3D

```

#### show chassis fpc (MX960 Router)

```

user@host> show chassis fpc

```

Slot	State	Temp (C)	CPU Utilization (%) Total Interrupt	Memory Utilization (%) DRAM (MB) Heap	Buffer
0	Empty				
1	Empty				
2	Empty				
3	Online	25	19	0	1024 15 57
4	Empty				
5	Online	26	27	0	1024 15 57
6	Empty				
7	Empty				
8	Empty				
9	Empty				
10	Empty				
11	Empty				

#### show chassis fpc (MX240, MX480, MX960 Routers with Application Services Modular Line Card)

```

user@host> show chassis fpc 1

```

Slot	State	Temp (C)	CPU Utilization (%) Total Interrupt	Memory Utilization (%) DRAM (MB) Heap	Buffer
1	Online	34	5	0	3072 5 13

#### show chassis fpc (MX240, MX480, MX960 with

```

user@host> show chassis fpc 1 detail
Slot 1 information:
  State                               Online
  Temperature                         34

```



### Application Services Modular Line Card

```

Total CPU DRAM          3072 MB
Total RLDRAM            259 MB
Total DDR DRAM          4864 MB
Start time:              2012-06-19 10:51:43 PDT
Uptime:                  16 minutes, 48 seconds
Max Power Consumption    550 Watts

```

### show chassis fpc (MX2010 Routers)

```

user@host show chassis fpc
      Temp CPU Utilization (%) Memory  Utilization (%)
Slot State      (C) Total  Interrupt  DRAM (MB) Heap      Buffer
0  Online        34      9         0      2048      18      13
1  Online        32      9         0      2048      15      13
2  Empty
3  Empty
4  Empty
5  Empty
6  Empty
7  Empty
8  Online        31     13         0      2048      11      13
9  Online        33     10         0      2048      18      13

```

### show chassis fpc (MX2020 Routers)

```

user@host show chassis fpc
      Temp CPU Utilization (%) Memory  Utilization (%)
Slot State      (C) Total  Interrupt  DRAM (MB) Heap      Buffer
0  Online        10     12         0      2048      18      13
1  Online         8      9         0      2048      18      13
2  Online         7      9         0      2048      18      13
3  Online         8     10         0      2048      18      13
4  Online         9     10         0      2048      18      13
5  Online         8      9         0      2048      18      13
6  Online         8     10         0      2048      18      13
7  Online         9      9         0      2048      18      13
8  Online         9     10         0      2048      18      13
9  Online        10      9         0      2048      18      13
10 Online        16      8         0      2048      18      13
11 Online        11     10         0      2048      18      13
12 Online        10     10         0      2048      18      13
13 Online        11      9         0      2048      18      13
14 Online        12     10         0      2048      18      13
15 Online        13      9         0      2048      18      13
16 Online        13      9         0      2048      18      13
17 Online        12      9         0      2048      18      13
18 Online        12      8         0      2048      18      13
19 Online        14     10         0      2048      18      13

```

### show chassis fpc (MX2020 Router with MPC4E)

```

user@host> show chassis fpc
      Temp CPU Utilization (%) Memory  Utilization (%)
Slot State      (C) Total  Interrupt  DRAM (MB) Heap      Buffer
0  Online        33     12         2      2048      11      13
1  Empty
2  Empty
3  Empty
4  Empty
5  Empty
6  Empty
7  Empty
8  Empty
9  Online        31     10         0      2048      11      13
10 Online        32      7         0      2048      14      13

```



11	Empty						
12	Empty						
13	Empty						
14	Online	28	12	0	2048	15	14
15	Empty						
16	Empty						
17	Empty						
18	Empty						
19	Online	38	8	0	2048	18	13

### show chassis fpc detail (MX2020 Router with MPC4E)

```
user@host> show chassis fpc detail
```

```
Slot 0 information:
```

```
State Online
Temperature 34
Total CPU DRAM 2048 MB
Total RLDRAM 806 MB
Total DDR DRAM 2632 MB
Start time: 2013-02-17 08:17:35 PST
Uptime: 1 day, 14 hours, 50 minutes, 39 seconds
Max Power Consumption 368 Watts
```

```
Slot 9 information:
```

```
State Online
Temperature 32
Total CPU DRAM 2048 MB
Total RLDRAM 806 MB
Total DDR DRAM 2632 MB
Start time: 2013-02-17 08:17:43 PST
Uptime: 1 day, 14 hours, 50 minutes, 31 seconds
Max Power Consumption 368 Watts
```

```
Slot 10 information:
```

```
State Online
Temperature 37
Total CPU DRAM 2048 MB
Total RLDRAM 1036 MB
Total DDR DRAM 6656 MB
Start time: 2013-02-17 08:17:54 PST
Uptime: 1 day, 14 hours, 50 minutes, 20 seconds
Max Power Consumption 520 Watts
```

```
Slot 14 information:
```

```
State Online
Temperature 32
Total CPU DRAM 2048 MB
Total RLDRAM 1036 MB
Total DDR DRAM 11264 MB
Start time: 2013-02-17 08:18:01 PST
Uptime: 1 day, 14 hours, 50 minutes, 13 seconds
Max Power Consumption 610 Watts
```

```
Slot 19 information:
```

```
State Online
Temperature 38
Total CPU DRAM 2048 MB
Total RLDRAM 1324 MB
Total DDR DRAM 5120 MB
Start time: 2013-02-17 08:18:08 PST
Uptime: 1 day, 14 hours, 50 minutes, 6 seconds
Max Power Consumption 440 Watts
```

### show chassis fpc pic-status (MX2020)

```
user@host> show chassis fpc pic-status
```

```
Slot 0 Online MPC Type 2 3D EQ
PIC 0 Online MIC-3D-10C192-XFP
```



```

Router with MPC4E)
PIC 2 Online MIC-3D-80C30C12-40C48
Slot 9 Online MPC Type 2 3D EQ
PIC 0 Online 2x 10GE XFP
PIC 1 Online 2x 10GE XFP
PIC 2 Online MIC-3D-10C192-XFP
Slot 10 Online MPCE Type 3 3D
PIC 0 Online 1x 10GE XFP
PIC 1 Online 1x 10GE XFP
Slot 14 Online MPC4E 3D 2CGE+8XGE
PIC 0 Online 4x10GE SFPP
PIC 1 Online 1X100GE CFP
PIC 2 Online 4x10GE SFPP
PIC 3 Online 1X100GE CFP
Slot 19 Online MPC 3D 16x 10GE
PIC 0 Online 4x 10GE(LAN) SFP+
PIC 1 Online 4x 10GE(LAN) SFP+
PIC 2 Online 4x 10GE(LAN) SFP+
PIC 3 Online 4x 10GE(LAN) SFP+

```

#### show chassis fpc detail (MX Series Routers)

```

user@host> show chassis fpc detail 2
Slot 0 information:
State Online
Temperature 36 degrees C / 96 degrees F
Total CPU DRAM 1024 MB
Total RLDRAM 256 MB
Total DDR DRAM 4096 MB
Start time: 2009-08-11 21:20:30 PDT
Uptime: 2 hours, 8 minutes, 50 seconds
Max Power Consumption 335 Watts

```

#### show chassis fpc (Hardware Not Supported)

```

user@host> show chassis fpc
show chassis fpc

```

Slot	State	Temp (C)	CPU Utilization (%)	Interrupt	Memory (MB)	Utilization (%)
			Total	CPU less FPC	DRAM (MB)	Heap Buffer
0	Online					
1	Present					
2	Online	0	0	0	0	0
3	Present					
4	Empty					
5	Empty					
6	Online	0	0	0	0	0

#### show chassis fpc detail (Hardware Not Supported)

```

user@host> show chassis fpc detail
Slot 0 information:
State Online
Total CPU DRAM ---- CPU less FPC ----
Start time 2006-07-07 03:21:00 UTC
Uptime 27 minutes, 51 seconds
Slot 1 information:
State Present
Reason --- Hardware Not In Right Slot ---
Slot 2 information:
State Online
Total CPU DRAM 32 MB
Start time 2006-07-07 03:20:59 UTC
Uptime 27 minutes, 52 seconds
Slot 3 information:
State Present
Reason --- Hardware Not Supported ---

```



```

Total CPU DRAM          0 MB
Slot 6 information:
State                   Online
Total CPU DRAM          32 MB
Start time              2006-07-07 03:21:01 UTC
Uptime                  27 minutes, 50 seconds

```

#### show chassis fpc pic-status

```

user@host> show chassis fpc pic-status
Slot 0 Online
  PIC 1  1x OC-12 ATM, MM
  PIC 2  1x OC-12 ATM, MM
  PIC 3  1x OC-12 ATM, MM
Slot 1 Online
  PIC 0  1x OC-48 SONET, SMIR
Slot 2 Online
  PIC 0  1x OC-192 SONET, SMSR

```

#### show chassis fpc pic-status (M Series Routers)

```

user@host> show chassis fpc pic-status
Slot 1  Online      FPC Type 1
  PIC 0  Present    2x OC-3 ATM, MM- Hardware Error
  PIC 1  Online     4x OC-3 SONET, SMIR
Slot 2  Online      E-FPC Type 2
  PIC 0  Online     4x G/E, 1000 BASE-SX
  PIC 1  Online     2x G/E SFP, 1000 BASE
  PIC 3  Online     1x Tunnel
Slot 3  Online      E-FPC Type 1
  PIC 0  Online     1x G/E IQ, 1000 BASE
  PIC 2  Online     1x G/E SFP, 1000 BASE
Slot 4  Online      E-FPC Type 2
  PIC 0  Online     4x G/E SFP, 1000 BASE
  PIC 1  Online     4x G/E SFP, 1000 BASE
  PIC 2  Online     4x G/E SFP, 1000 BASE
  PIC 3  Online     4x G/E SFP, 1000 BASE
Slot 5  Online      FPC Type 2
...

```

#### show chassis fpc pic-status (M120 Router)

```

user@host> show chassis fpc pic-status
Slot 1  Online      M120 CFPC 10GE
  PIC 0  Online     1x 10GE(LAN/WAN) XFP
Slot 3  Online      M120 FPC Type 2 (proto)
  PIC 0  Online     2x G/E IQ, 1000 BASE
  PIC 1  Online     4x OC-3 SONET, SMIR
  PIC 2  Online     2x G/E IQ, 1000 BASE
  PIC 3  Online     8x 1GE(LAN), IQ2
Slot 4  Online      M120 FPC Type 3 (proto)
  PIC 0  Online     10x 1GE(LAN), 1000 BASE
Slot 5  Online      M120 FPC Type 1 (proto)
  PIC 0  Present    1x G/E, 1000 BASE-LX- Not Supported
  PIC 1  Online     1x CHOC3 IQ SONET, SMLR
  PIC 2  Online     4x CHDS3 IQ
  PIC 3  Online     1x G/E SFP, 1000 BASE

```

#### show chassis fpc pic-status (MX240, MX480, and MX960 Routers with

In the following output **Slot 1 and Slot 5** are the Application Services Modular Carrier Cards (AS MCC), **PIC 0** is the Application Services Modular Storage Card (AS MSC), and **PIC 2** is the Application Services Modular Processing Card (AS MXC).



Application Services  
Modular Line Card)

```

user@host>show chassis fpc pic-status
Slot 2  Online      MPC Type 1 3D Q
  Slot 1  Online      AS-MCC
    PIC 0  Online      AS-MSC
    PIC 2  Online      AS-MXC
Slot 4  Offline     MPC 3D 16x 10GE
Slot 5  Offline     AS-MCC

```

show chassis fpc lcc  
(TX Matrix Router)

```

user@host> show chassis fpc lcc 0
lcc0-re0:
-----

```

Slot	State	Temp (C)	CPU Total	Interrupt	Utilization (%) DRAM (MB)	Memory Heap	Utilization (%) Buffer
0	Empty						
1	Online	27	2	0	256	8	44
2	Online	27	3	0	256	15	44
3	Empty						
4	Empty						
5	Empty						
6	Empty						
7	Empty						

show chassis fpc  
pic-status (TX Matrix  
Router)

```

user@host> show chassis fpc pic-status
lcc0-re0:
-----
Slot 0  Online      FPC Type 3
  PIC 0  Online      1x OC-192 SM SR1
  PIC 1  Online      1x OC-192 SM SR2
  PIC 2  Online      1x OC-192 SM SR1
  PIC 3  Online      1x Tunnel
Slot 1  Online      FPC Type 2
  PIC 0  Online      1x OC-48 SONET, SMSR
  PIC 1  Online      1x OC-48 SONET, SMSR

```

```
lcc1-re0:
-----
```

```
lcc2-re0:
-----
```

```

Slot 1  Online      FPC Type 3
  PIC 0  Online      1x OC-192 SM SR1
Slot 5  Online      FPC Type 2
  PIC 0  Online      1x OC-48 SONET, SMSR
  PIC 1  Online      2x G/E, 1000 BASE-LX
  PIC 2  Online      2x G/E, 1000 BASE-LX
  PIC 3  Online      1x OC-48 SONET, SMSR

```

```
lcc3-re0:
-----
```

show chassis fpc  
pic-status lcc (TX  
Matrix Router)

```

user@host> show chassis fpc pic-status lcc 0
lcc0-re0:
-----
Slot 0  Online      FPC Type 3
  PIC 0  Online      1x OC-192 SM SR2
Slot 1  Online      FPC Type 2
  PIC 0  Online      2x OC-12 ATM2 IQ, MM
  PIC 1  Online      1x OC-48 SONET, SMSR
  PIC 2  Online      1x OC-48 SONET, SMSR

```



PIC 3 Online 4x G/E, 1000 BASE-SX

### show chassis fpc (TX Matrix Plus Router)

```
user@host> show chassis fpc
lcc0-re0:
```

Slot	State	Temp (C)	CPU Utilization (%)		Memory DRAM (MB)	Utilization (%)	
			Total	Interrupt		Heap	Buffer
0	Empty						
1	Online	38	4	0	2048	3	24
2	Online	43	8	0	2048	6	24
3	Empty						
4	Online	43	6	0	2048	6	24
5	Empty						
6	Online	42	13	0	2048	6	24
7	Online	45	7	0	2048	3	24

```
lcc2-re0:
```

Slot	State	Temp (C)	CPU Utilization (%)		Memory DRAM (MB)	Utilization (%)	
			Total	Interrupt		Heap	Buffer
0	Online	42	10	0	2048	6	24
1	Empty						
2	Online	42	11	0	2048	6	24
3	Online	40	5	0	2048	3	24
4	Online	33	26	0	1024	8	49
5	Empty						
6	Online	43	8	0	2048	6	24
7	Online	46	6	0	2048	3	24

```
lcc3-re0:
```

Slot	State	Temp (C)	CPU Utilization (%)		Memory DRAM (MB)	Utilization (%)	
			Total	Interrupt		Heap	Buffer
0	Empty						
1	Empty						
2	Online	39	30	0	2048	7	24
3	Empty						
4	Online	41	8	0	2048	6	24
5	Online	41	12	0	2048	6	24
6	Online	40	8	0	2048	6	24
7	Online	42	4	0	2048	3	24

### show chassis fpc lcc (TX Matrix Plus Router)

```
user@host> show chassis fpc lcc 0
lcc0-re0:
```

Slot	State	Temp (C)	CPU Utilization (%)		Memory DRAM (MB)	Utilization (%)	
			Total	Interrupt		Heap	Buffer
0	Empty						
1	Online	38	4	0	2048	3	24
2	Online	43	8	0	2048	6	24
3	Empty						
4	Online	43	6	0	2048	6	24
5	Empty						
6	Online	42	14	0	2048	6	24
7	Online	45	6	0	2048	3	24

### show chassis fpc detail (TX Matrix Plus Router)

```
user@host> show chassis fpc details
```

```
lcc0-re0:
```



## Router)

```

-----
Slot 1 information:
  State                               Online
  Temperature                         38 degrees C / 100 degrees F
  Total CPU DRAM                      2048 MB
  Total SRAM                          64 MB
  Total SDRAM                        1280 MB
  Start time                         2010-10-04 20:06:22 PDT
  Uptime                             1 hour, 32 minutes, 51 seconds
Slot 2 information:
  State                               Online
  Temperature                         43 degrees C / 109 degrees F
  Total CPU DRAM                      2048 MB
  Total SRAM                          128 MB
  Total SDRAM                        2560 MB
  Start time                         2010-10-04 20:06:37 PDT
  Uptime                             1 hour, 32 minutes, 36 seconds
Slot 4 information:
  State                               Online
  Temperature                         43 degrees C / 109 degrees F
  Total CPU DRAM                      2048 MB
  Total SRAM                          128 MB
  Total SDRAM                        2560 MB
  Start time                         2010-10-04 20:06:40 PDT
  Uptime                             1 hour, 32 minutes, 33 seconds
Slot 6 information:
  State                               Online
  Temperature                         42 degrees C / 107 degrees F
  Total CPU DRAM                      2048 MB
  Total SRAM                          128 MB
  Total SDRAM                        2560 MB
  Start time                         2010-10-04 20:06:42 PDT
  Uptime                             1 hour, 32 minutes, 31 seconds
Slot 7 information:
  State                               Online
  Temperature                         45 degrees C / 113 degrees F
  Total CPU DRAM                      2048 MB
  Total SRAM                          64 MB
  Total SDRAM                        1280 MB
  Start time                         2010-10-04 20:06:43 PDT
  Uptime                             1 hour, 32 minutes, 30 seconds

lcc2-re0:
-----
Slot 0 information:
  State                               Online
  Temperature                         42 degrees C / 107 degrees F
  Total CPU DRAM                      2048 MB
  Total SRAM                          128 MB
  Total SDRAM                        2560 MB
  Start time                         2010-10-04 20:06:35 PDT
  Uptime                             1 hour, 32 minutes, 38 seconds
Slot 2 information:
  State                               Online
  Temperature                         42 degrees C / 107 degrees F
  Total CPU DRAM                      2048 MB
  Total SRAM                          128 MB
  Total SDRAM                        2560 MB
  Start time                         2010-10-04 20:06:37 PDT
  Uptime                             1 hour, 32 minutes, 36 seconds
Slot 3 information:

```



```

State                               Online
Temperature                         40 degrees C / 104 degrees F
Total CPU DRAM                      2048 MB
Total SRAM                          64 MB
Total SDRAM                         1280 MB
Start time                          2010-10-04 20:06:28 PDT
Uptime                              1 hour, 32 minutes, 45 seconds

Slot 4 information:
State                               Online
Temperature                         33 degrees C / 91 degrees F
Total CPU DRAM                      1024 MB
Total SRAM                          64 MB
Total SDRAM                         1280 MB
Start time                          2010-10-04 20:08:03 PDT
Uptime                              1 hour, 31 minutes, 10 seconds

Slot 6 information:
State                               Online
Temperature                         43 degrees C / 109 degrees F
Total CPU DRAM                      2048 MB
Total SRAM                          128 MB
Total SDRAM                         2560 MB
Start time                          2010-10-04 20:06:44 PDT
Uptime                              1 hour, 32 minutes, 29 seconds

Slot 7 information:
State                               Online
Temperature                         46 degrees C / 114 degrees F
Total CPU DRAM                      2048 MB
Total SRAM                          64 MB
Total SDRAM                         1280 MB
Start time                          2010-10-04 20:06:46 PDT
Uptime                              1 hour, 32 minutes, 27 seconds

```

```
lcc3-re0:
```

```

-----
Slot 2 information:
State                               Online
Temperature                         38 degrees C / 100 degrees F
Total CPU DRAM                      2048 MB
Total SRAM                          128 MB
Total SDRAM                         2560 MB
Start time                          2010-10-04 20:17:31 PDT
Uptime                              1 hour, 21 minutes, 42 seconds

Slot 4 information:
State                               Online
Temperature                         41 degrees C / 105 degrees F
Total CPU DRAM                      2048 MB
Total SRAM                          128 MB
Total SDRAM                         2560 MB
Start time                          2010-10-04 20:17:34 PDT
Uptime                              1 hour, 21 minutes, 39 seconds

Slot 5 information:
State                               Online
Temperature                         41 degrees C / 105 degrees F
Total CPU DRAM                      2048 MB
Total SRAM                          128 MB
Total SDRAM                         2560 MB
Start time                          2010-10-04 20:17:36 PDT
Uptime                              1 hour, 21 minutes, 37 seconds

Slot 6 information:
State                               Online
Temperature                         40 degrees C / 104 degrees F

```



```

Total CPU DRAM          2048 MB
Total SRAM              128 MB
Total SDRAM            2560 MB
Start time              2010-10-04 20:17:39 PDT
Uptime                 1 hour, 21 minutes, 34 seconds

Slot 7 information:
State                  Online
Temperature            42 degrees C / 107 degrees F
Total CPU DRAM        2048 MB
Total SRAM            64 MB
Total SDRAM           1280 MB
Start time            2010-10-04 20:17:41 PDT
Uptime                1 hour, 21 minutes, 32 seconds

```

**show chassis fpc  
pic-status (TX Matrix  
Plus Router)**

```
user@host> show chassis fpc pic-status
```

```
1cc0-re0:
```

```

-----
Slot 1  Online      FPC Type 2-ES
PIC 0   Online      8x 1GE(LAN), IQ2
Slot 2  Online      FPC Type 4-ES
PIC 0   Online      4x 10GE (LAN/WAN) XFP
Slot 4  Online      FPC Type 4-ES
PIC 0   Online      4x 10GE (LAN/WAN) XFP
Slot 6  Online      FPC Type 4-ES
PIC 0   Online      4x 10GE (LAN/WAN) XFP
PIC 1   Online      4x 10GE (LAN/WAN) XFP
Slot 7  Online      FPC Type 3-ES
PIC 0   Online      10x 1GE(LAN), 1000 BASE
PIC 2   Online      1x OC-192 SM SR2
PIC 3   Online      10x 1GE(LAN), 1000 BASE

```

```
1cc2-re0:
```

```

-----
Slot 0  Online      FPC Type 4-ES
PIC 0   Online      4x 10GE (LAN/WAN) XFP
Slot 2  Online      FPC Type 4-ES
PIC 0   Online      4x 10GE (LAN/WAN) XFP
PIC 1   Online      4x 10GE (LAN/WAN) XFP
Slot 3  Online      FPC Type 2-ES
PIC 0   Online      8x 1GE(LAN), IQ2
Slot 4  Online      FPC Type 4
PIC 0   Online      10x10GE(LAN/WAN) SFPP
Slot 6  Online      FPC Type 4-ES
PIC 0   Online      4x OC-192 SONET XFP
Slot 7  Online      FPC Type 3-ES
PIC 0   Online      10x 1GE(LAN), 1000 BASE
PIC 1   Offline     1x 10GE(LAN/WAN) IQ2E
PIC 2   Online      1x OC-192 SM SR2
PIC 3   Online      1x Tunnel

```

```
1cc3-re0:
```

```

-----
Slot 2  Online      FPC Type 4-ES
PIC 0   Online      10x10GE(LAN/WAN) SFPP
Slot 4  Online      FPC Type 4-ES
PIC 0   Online      4x OC-192 SONET XFP
Slot 5  Online      FPC Type 4-ES
PIC 0   Online      4x OC-192 SONET XFP
PIC 1   Online      4x 10GE (LAN/WAN) XFP
Slot 6  Online      FPC Type 4-ES

```



```

PIC 1 Online      4x 10GE (LAN/WAN) XFP
Slot 7 Online      FPC Type 3-ES
PIC 0 Online      10x 1GE(LAN), 1000 BASE
PIC 1 Online      8x 1GE(TYPE3), IQ2E
PIC 2 Online      4x OC-48 SONET

```

### show chassis fpc (T1600 Router)

```

user@host> show chassis fpc

Slot State      Temp  CPU Utilization (%)  Memory  Utilization (%)
      (C)  Total  Interrupt      DRAM (MB) Heap      Buffer
0 Empty
1 Empty
2 Online        49      3          0      2048      3      24
3 Online        46      6          0      2048      6      24
4 Empty
5 Online        46      5          0      2048      3      24
6 Empty
7 Online        44      8          0      1024      7      49

```

### show chassis fpc detail (T1600 Router)

```

user@host> show chassis fpc detail

show chassis fpc detail
Slot 2 information:
State Online
Temperature 49 degrees C / 120 degrees F
Total CPU DRAM 2048 MB
Total SRAM 64 MB
Total SDRAM 1280 MB
Start time 2010-10-04 21:12:52 PDT
Uptime 32 minutes, 9 seconds
Slot 3 information:
State Online
Temperature 47 degrees C / 116 degrees F
Total CPU DRAM 2048 MB
Total SRAM 128 MB
Total SDRAM 2560 MB
Start time 2010-10-04 21:13:06 PDT
Uptime 31 minutes, 55 seconds
Slot 5 information:
State Online
Temperature 46 degrees C / 114 degrees F
Total CPU DRAM 2048 MB
Total SRAM 64 MB
Total SDRAM 1280 MB
Start time 2010-10-04 21:12:56 PDT
Uptime 32 minutes, 5 seconds
Slot 7 information:
State Online
Temperature 44 degrees C / 111 degrees F
Total CPU DRAM 1024 MB
Total SRAM 64 MB
Total SDRAM 1280 MB
Start time 2010-10-04 21:14:34 PDT
Uptime 30 minutes, 27 seconds

```

### show chassis fpc slot (T1600 Router)

```

user@host> show chassis fpc slot 2

Slot State      Temp  CPU Utilization (%)  Memory  Utilization (%)
      (C)  Total  Interrupt      DRAM (MB) Heap      Buffer
2 Online        49      3          0      2048      3      24

```



**show chassis fpc  
pic-status (T1600  
Router)**

user@host&gt; show chassis fpc pic-status

```

Slot 2  Online      FPC Type 1-ES
        PIC 0  Online      Load Type 1
        PIC 1  Online      4x 1GE(LAN), IQ2E
        PIC 3  Online      1x OC-12-3 SFP
Slot 3  Online      FPC Type 4-ES
        PIC 0  Online      4x 10GE (LAN/WAN) XFP
        PIC 1  Online      4x OC-192 SONET XFP
Slot 5  Online      FPC Type 2-ES
        PIC 0  Online      Load Type 2
        PIC 1  Online      8x 1GE(LAN), IQ2E
        PIC 2  Online      8x 1GE(LAN), IQ2E
        PIC 3  Online      1x OC-48-12-3 SFP
Slot 7  Online      FPC Type 4
        PIC 0  Online      4x 10GE (LAN/WAN) XFP

```

**show chassis fpc  
(T4000 Router)**

user@host&gt; show chassis fpc

```

regress@stymphalian# run show chassis fpc

```

Slot	State	Temp (C)	CPU Total	Utilization (%) Interrupt	Memory DRAM (MB)	Utilization (%) Heap	Utilization (%) Buffer
0	Online	48	15	0	2816	21	27
1	Empty						
2	Empty						
3	Online	51	15	0	2816	21	27
4	Empty						
5	Online	39	8	0	2048	6	23
6	Online	49	15	0	2816	21	27
7	Empty						

**show chassis fpc detail  
(T4000 Router)**

user@host&gt; show chassis fpc detail

```

Slot 0 information:
  State                Online
  Temperature          48 degrees C / 118 degrees F
  Total CPU DRAM       2816 MB
  Total SRAM           1554 MB
  Total SDRAM          10752 MB
  Start time           2012-02-09 22:56:25 PST
  Uptime               2 hours, 40 minutes, 52 seconds

Slot 3 information:
  State                Online
  Temperature          51 degrees C / 123 degrees F
  Total CPU DRAM       2816 MB
  Total SRAM           1554 MB
  Total SDRAM          10752 MB
  Start time           2012-02-09 22:56:22 PST
  Uptime               2 hours, 40 minutes, 55 seconds

Slot 5 information:
  State                Online
  Temperature          39 degrees C / 102 degrees F
  Total CPU DRAM       2048 MB
  Total SRAM           128 MB
  Total SDRAM          2560 MB
  Start time           2012-02-09 22:51:27 PST
  Uptime               2 hours, 45 minutes, 50 seconds

Slot 6 information:
  State                Online

```



```

Temperature                49 degrees C / 120 degrees F
Total CPU DRAM              2816 MB
Total SRAM                  1554 MB
Total SDRAM                 10752 MB
Start time                  2012-02-09 22:56:29 PST
Uptime                      2 hours, 40 minutes, 48 seconds

```

#### show chassis fpc pic-status (T4000 Router)

```

user@host> show chassis fpc pic-status
Slot 0  Online      FPC Type 5-3D
        PIC 0  Online  12x10GE (LAN/WAN) SFPP
        PIC 1  Online  12x10GE (LAN/WAN) SFPP
Slot 3  Online      FPC Type 5-3D
        PIC 0  Online  1x100GE
        PIC 1  Online  12x10GE (LAN/WAN) SFPP
Slot 5  Online      FPC Type 4-ES
        PIC 0  Online  100GE
        PIC 1  Online  100GE CFP
Slot 6  Online      FPC Type 5-3D
        PIC 0  Online  12x10GE (LAN/WAN) SFPP
        PIC 1  Online  12x10GE (LAN/WAN) SFPP

```

#### show chassis fpc (QFX Series)

```

user@switch> show chassis fpc
Temp CPU Utilization (%) Memory      Utilization (%)
Slot State              (C) Total Interrupt      DRAM (MB) Heap      Buffer
0  Online                26      2          0          2820      0        49

```

#### show chassis fpc detail (QFX3500 Switches)

```

user@switch> show chassis fpc detail
Slot 0 information:
State                Online
Temperature          28 degrees C / 82 degrees F
Total CPU DRAM       2820 MB
Total SRAM           0 MB
Total SDRAM          0 MB
Start time           2010-09-20 01:34:13 PDT
Uptime               3 days, 3 hours, 31 minutes, 48 seconds

```

#### show chassis fpc pic-status (QFX3500 Switches)

```

user@switch> show chassis fpc pic-status
Slot 0  Online      QFX 48x10G 4x40G Switch
        PIC 0  Online  48x 10G-SFP+
        PIC 1  Online  15x 10G-SFP+

```

#### show chassis fpc interconnect-device (QFabric System)

```

user@switch> show chassis fpc interconnect-device interconnect1
FPC status:
Temp
Slot State          (C)
0  Online           0
1  Online           0
2  Online           0
3  Online           0
4  Online           0
5  Online           0
6  Online           0
7  Online           0
8  Online           0
9  Online           0
10 Online           0
11 Online           0

```



```

12 Online      0
13 Online      0
14 Online      0
15 Online      0

```

**show chassis fpc  
interconnect-device  
(QFabric System)**

```

user@switch> show chassis fpc interconnect-device interconnect1 3
FPC status:
Slot State      Temp
          (C)
  3  Online      0

```

**show chassis fpc  
interconnect-device  
detail (QFabric  
System)**

```

user@switch> show chassis fpc interconnect-device interconnect1 3 detail
Slot 3 information:
State                               Online
Temperature                         0 degrees C / 32 degrees F
Start time                         2011-08-18 10:45:04 PDT
Uptime                             1 minute, 49 seconds

```

**show chassis fpc  
pic-status**

```

user@switch> show chassis fpc pic-status interconnect-device interconnect1
Slot 0  Online      QFX 16-port QSFP+ Front Card
PIC 0   Online      16x 40G-QSFP+

```



**interconnect-device  
(QFabric System)**

```

PIC 1 Online 16x 40G-GE
Slot 1 Online QFX 16-port QSFP+ Front Card
PIC 0 Online 16x 40G-QSFP+
PIC 1 Online 16x 40G-GE
Slot 2 Online QFX 16-port QSFP+ Front Card
PIC 0 Online 16x 40G-QSFP+
PIC 1 Online 16x 40G-GE
Slot 3 Online QFX 16-port QSFP+ Front Card
PIC 0 Online 16x 40G-QSFP+
PIC 1 Online 16x 40G-GE
Slot 4 Online QFX 16-port QSFP+ Front Card
PIC 0 Online 16x 40G-QSFP+
PIC 1 Online 16x 40G-GE
Slot 5 Online QFX 16-port QSFP+ Front Card
PIC 0 Online 16x 40G-QSFP+
PIC 1 Online 16x 40G-GE
Slot 6 Online QFX 16-port QSFP+ Front Card
PIC 0 Online 16x 40G-QSFP+
PIC 1 Online 16x 40G-GE
Slot 7 Online QFX 16-port QSFP+ Front Card
PIC 0 Online 16x 40G-QSFP+
PIC 1 Online 16x 40G-GE
Slot 8 Online QFX Fabric Rear Card
PIC 0 Online 16x 40G-GE
Slot 9 Online QFX Fabric Rear Card
PIC 0 Online 16x 40G-GE
Slot 10 Online QFX Fabric Rear Card
PIC 0 Online 16x 40G-GE
Slot 11 Online QFX Fabric Rear Card
PIC 0 Online 16x 40G-GE
Slot 12 Online QFX Fabric Rear Card
PIC 0 Online 16x 40G-GE
Slot 13 Online QFX Fabric Rear Card
PIC 0 Online 16x 40G-GE
Slot 14 Online QFX Fabric Rear Card
PIC 0 Online 16x 40G-GE
Slot 15 Online QFX Fabric Rear Card
PIC 0 Online 16x 40G-GE

```

**show chassis fpc  
pic-status node-device  
(QFabric System)**

```

user@switch> show chassis fpc pic-status node-device node1
Slot node1 Online QFX 48x10G 4x40G Switch
PIC 0 Online 48x 10G-SFP+
PIC 1 Online 4x 40G-QSFP+

```

**show chassis fpc  
(PTX5000 Packet  
Transport Switch)**

```

user@host> show chassis fpc

```

Slot	State	Temp (C)	CPU Utilization (%) Total Interrupt	Memory DRAM (MB)	Utilization (%) Heap Buffer
0	Empty				
1	Empty				
2	Online	50	6 0	2816	5 27
3	Empty				
4	Empty				
5	Online	48	9 0	2816	5 27
6	Empty				
7	Online	49	8 0	2816	5 27

**show chassis fpc detail**

```

user@host> show chassis fpc detail
Slot 2 information:

```



## (PTX5000 Packet Transport Switch)

```

State
Temperature 35 degrees C / 95 degrees F (PMB)
Temperature 35 degrees C / 95 degrees F (Intake)
Temperature 50 degrees C / 122 degrees F (Exhaust A)
Temperature 54 degrees C / 129 degrees F (Exhaust B)
Temperature 54 degrees C / 129 degrees F (TL0)
Temperature 52 degrees C / 125 degrees F (TQ0)
Temperature 61 degrees C / 141 degrees F (TL1)
Temperature 58 degrees C / 136 degrees F (TQ1)
Temperature 57 degrees C / 134 degrees F (TL2)
Temperature 58 degrees C / 136 degrees F (TQ2)
Temperature 62 degrees C / 143 degrees F (TL3)
Temperature 61 degrees C / 141 degrees F (TQ3)
Total CPU DRAM 2816 MB
Total SRAM 0 MB
Total SDRAM 0 MB
Start time 2012-01-12 12:05:42 PST
Uptime 3 hours, 14 minutes, 7 seconds

Slot 5 information:
State
Temperature 35 degrees C / 95 degrees F (PMB)
Temperature 34 degrees C / 93 degrees F (Intake)
Temperature 48 degrees C / 118 degrees F (Exhaust A)
Temperature 53 degrees C / 127 degrees F (Exhaust B)
Temperature 54 degrees C / 129 degrees F (TL0)
Temperature 52 degrees C / 125 degrees F (TQ0)
Temperature 69 degrees C / 156 degrees F (TL1)
Temperature 56 degrees C / 132 degrees F (TQ1)
Temperature 54 degrees C / 129 degrees F (TL2)
Temperature 56 degrees C / 132 degrees F (TQ2)
Temperature 59 degrees C / 138 degrees F (TL3)
Temperature 60 degrees C / 140 degrees F (TQ3)
Total CPU DRAM 2816 MB
Total SRAM 0 MB
Total SDRAM 0 MB
Start time 2012-01-12 12:05:43 PST
Uptime 3 hours, 14 minutes, 6 seconds

Slot 7 information:
State
Temperature 35 degrees C / 95 degrees F (PMB)
Temperature 33 degrees C / 91 degrees F (Intake)
Temperature 50 degrees C / 122 degrees F (Exhaust A)
Temperature 55 degrees C / 131 degrees F (Exhaust B)
Temperature 56 degrees C / 132 degrees F (TL0)
Temperature 56 degrees C / 132 degrees F (TQ0)
Temperature 61 degrees C / 141 degrees F (TL1)
Temperature 57 degrees C / 134 degrees F (TQ1)
Temperature 55 degrees C / 131 degrees F (TL2)
Temperature 59 degrees C / 138 degrees F (TQ2)
Temperature 62 degrees C / 143 degrees F (TL3)
Temperature 62 degrees C / 143 degrees F (TQ3)
Total CPU DRAM 2816 MB
Total SRAM 0 MB
Total SDRAM 0 MB
Start time 2012-01-12 12:05:44 PST
Uptime 3 hours, 14 minutes, 5 seconds

```

show chassis fpc  
pic-status (PTX5000)

```

user@host> show chassis fpc pic-status
Slot 2  Online  FPC
PIC 0  Online  24x 10GE(LAN) SFP+

```



**Packet Transport Switch)**

```

PIC 1 Online      24x 10GE(LAN) SFP+
Slot 5 Online      FPC
PIC 0 Online      24x 10GE(LAN) SFP+
PIC 1 Online      2x 40GE CFP
Slot 7 Online      FPC
PIC 0 Online      24x 10GE(LAN) SFP+
PIC 1 Online      2x 40GE CFP

```

**show chassis fpc  
(ACX2000 Universal Access Router)**

```

user@host> show chassis fpc

```

Slot	State	Temp (C)	CPU Utilization (%)	Memory Utilization (%)
			Total Interrupt	DRAM (MB) Heap Buffer
0	Online	61	17 6	512 21 37

**show chassis fpc 0  
(ACX2000 Universal Access Router)**

```

user@host> show chassis fpc 0

```

Slot	State	Temp (C)	CPU Utilization (%)	Memory Utilization (%)
			Total Interrupt	DRAM (MB) Heap Buffer
0	Online	61	17 6	512 21 37

**show chassis fpc detail  
(ACX2000 Universal Access Router)**

```

user@host> show chassis fpc detail
Slot 0 information:
  State Online
  Temperature 61 degrees C / 141 degrees F
  Total CPU DRAM 512 MB
  Start time 2012-05-29 02:52:06 PDT
  Uptime 27 minutes, 17 seconds

```

**show chassis fpc  
pic-status (ACX2000 Universal Access Router)**

```

user@host> show chassis fpc pic-status
Slot 0 Online
  PIC 0 Online      16x CHE1T1, RJ48
  PIC 1 Online      8x 1GE(LAN) RJ45
  PIC 2 Online      2x 1GE(LAN) SFP
  PIC 3 Online      2x 10GE(LAN) SFP+

```

**show chassis FPC 1  
(MX Routers with Media Services Blade [MSB])**

```

user@switch> show chassis fpc 1

```

Slot	State	Temp (C)	CPU Utilization (%)	Memory Utilization (%)
			Total Interrupt	DRAM (MB) Heap Buffer
1	Online	34	5 0	3072 5 13

**show chassis FPC 1  
detail (MX Routers with Media Services Blade [MSB])**

```

user@switch> show chassis fpc 1 detail
Slot 1 information:
  State Online
  Temperature 34
  Total CPU DRAM 3072 MB
  Total RLDRAM 259 MB
  Total DDR DRAM 4864 MB
  Start time: 2012-06-19 10:51:43 PDT
  Uptime: 16 minutes, 48 seconds
  Max Power Consumption 550 Watts

```



## show chassis hardware

---

<b>Syntax</b>	show chassis hardware <detail   extensive> <clei-models> <models>
<b>Syntax (EX Series)</b>	show chassis hardware <clei-models> <detail   extensive> <models>
<b>Syntax (T4000 Router)</b>	show chassis hardware <clei-models> <detail   extensive> <models>
<b>Syntax (TX Matrix Router)</b>	show chassis hardware <clei-models> <detail   extensive> <models> <lcc <i>number</i>   scc>
<b>Syntax (TX Matrix Plus Router)</b>	show chassis hardware <clei-models> <detail   extensive> <models> <lcc <i>number</i>   sfc <i>number</i> >
<b>Syntax (MX Series Routers)</b>	show chassis hardware <detail   extensive> <clei-models> <models> <all-members> <local> <member <i>member-id</i> >
<b>Syntax (MX2010 3D Universal Edge Routers)</b>	show chassis hardware <clei-models> <detail   extensive> <models>
<b>Syntax (MX2020 3D Universal Edge Routers)</b>	show chassis hardware <clei-models> <detail   extensive> <models>
<b>Syntax (QFX Series)</b>	show chassis hardware <detail   extensive> <clei-models> <interconnect-device <i>name</i> > <node-device <i>name</i> > <models>



<b>Syntax (PTX Series Packet Transport Switches)</b>	<pre>show chassis hardware &lt;detail   extensive&gt; &lt;clei-models&gt; &lt;models&gt;</pre>
<b>Syntax (ACX Series Universal Access Routers)</b>	<pre>show chassis hardware &lt;detail   extensive&gt; &lt;clei-models&gt; &lt;models&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p><b>models</b> option introduced in Junos OS Release 8.2.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6.</p> <p>Command introduced in Junos OS Release 11.1 for QFX Series.</p> <p>Command introduced in Junos OS Release 12.1 for PTX Series Packet Transport Switches.</p> <p>Command introduced in Junos OS Release 12.2 for ACX Series Universal Access Routers.</p> <p>Command introduced in Junos OS Release 12.3 for MX2020 3D Universal Edge Routers.</p> <p>Command introduced in Junos OS Release 12.3 for MX2010 3D Universal Edge Routers.</p>
<b>Description</b>	<p>Display a list of all Flexible PIC Concentrators (FPCs) and PICs installed in the router or switch chassis, including the hardware version level and serial number.</p> <p>In the EX Series switch command output, FPC refers to the following:</p> <ul style="list-style-type: none"> <li>On EX2200 switches, EX3200 switches, EX4200 standalone switches, and EX4500 switches—Refers to the switch; FPC <b>number</b> is always 0.</li> <li>On EX4200 switches in a Virtual Chassis configuration—Refers to the member of a Virtual Chassis; FPC <b>number</b> equals the member ID, from 0 through 9.</li> <li>On EX8208 and EX8216 switches—Refers to a line card; FPC <b>number</b> equals the slot number for the line card.</li> </ul> <p>On a QFX3500 standalone switch, both the FPC and FPC <b>number</b> are always 0.</p> <p>On Type 5 FPC on T4000 routers, there are no <b>top temperature sensor</b> or <b>bottom temperature sensor</b> parameters. Instead, <b>fan intake temperature sensor</b> and <b>fan exhaust temperature sensors</b> parameters are displayed.</p>
<b>Options</b>	<p><b>none</b>—Display information about hardware. For a TX Matrix router, display information about the TX Matrix router and its attached T640 routers. For a TX Matrix Plus router, display information about the TX Matrix Plus router and its attached T1600 routers.</p> <p><b>clei-models</b>—(Optional) Display Common Language Equipment Identifier (CLEI) barcode and model number for orderable field-replaceable units (FRUs).</p> <p><b>detail</b>—(Optional) Include RAM and disk information in output.</p> <p><b>extensive</b>—(Optional) Display ID EEPROM information.</p> <p><b>all-members</b>—(MX Series routers only) (Optional) Display hardware-specific information for all the members of the Virtual Chassis configuration.</p>



**interconnect-device *name***—(QFabric systems only) (Optional) Display hardware-specific information for the Interconnect device.

**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display hardware information for a specified T640 router (or line-card chassis) that is connected to the TX Matrix router. On a TX Matrix Plus router, display hardware information for a specified T1600 router (or line-card chassis) that is connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.

**local**—(MX Series routers only) (Optional) Display hardware-specific information for the local Virtual Chassis members.

**member *member-id***—(MX Series routers only) (Optional) Display hardware-specific information for the specified member of the Virtual Chassis configuration. Replace ***member-id*** with a value of 0 or 1.

**models**—(Optional) Display model numbers and part numbers for orderable FRUs and, for components that use ID EEPROM format v2, the CLEI code.

**node-device *name***—(QFabric systems only) (Optional) Display hardware-specific information for the Node device.

**scc**—(TX Matrix router only) (Optional) Display hardware information for the TX Matrix router (or switch-card chassis).

**sfc *number***—(TX Matrix Plus router only) (Optional) Display hardware information for the TX Matrix Plus router (or switch-fabric chassis). Replace ***number*** with 0.

**Additional Information** The **show chassis hardware detail** command now displays DIMM information for the following Routing Engines:

**Table 47: Routing Engines Displaying DIMM Information**

Routing Engines	Routers
RE-S-1800x2 and RE-S-1800x4	MX240, MX480, and MX960 routers
RE-A-1800x2	M120 and M320 routers

**Required Privilege Level** view

**Related Documentation**

- show chassis power

**List of Sample Output**

- [show chassis hardware \(EX8216 Switch\) on page 636](#)
- [show chassis hardware clei-models \(EX8216 Switch\) on page 637](#)
- [show chassis hardware clei-models \(T1600 Router\) on page 637](#)
- [show chassis hardware detail \(EX4200 Switch\) on page 638](#)
- [show chassis hardware models \(EX4500 Switch\) on page 638](#)
- [show chassis hardware \(J6350 Router\) on page 638](#)
- [show chassis hardware \(J6300 Router\) on page 638](#)



[show chassis hardware \(M7i Router\) on page 639](#)  
[show chassis hardware \(M10 Router\) on page 639](#)  
[show chassis hardware models \(M10 Router\) on page 640](#)  
[show chassis hardware \(M20 Router\) on page 640](#)  
[show chassis hardware models \(M20 Router\) on page 641](#)  
[show chassis hardware \(M40 Router\) on page 641](#)  
[show chassis hardware \(M40e Router\) on page 642](#)  
[show chassis hardware \(M120 Router\) on page 642](#)  
[show chassis hardware detail \(M120 Router\) on page 643](#)  
[show chassis hardware models \(M120 Router\) on page 644](#)  
[show chassis hardware \(M160 Router\) on page 645](#)  
[show chassis hardware models \(M160 Router\) on page 645](#)  
[show chassis hardware detail \(M160 Router\) on page 646](#)  
[show chassis hardware \(M320 Router\) on page 647](#)  
[show chassis hardware models \(M320 Router\) on page 647](#)  
[show chassis hardware \(MX5 Router\) on page 648](#)  
[show chassis hardware \(MX10 Router\) on page 649](#)  
[show chassis hardware \(MX40 Router\) on page 649](#)  
[show chassis hardware \(Fixed MX80 Router\) on page 650](#)  
[show chassis hardware \(Modular MX80 Router\) on page 650](#)  
[show chassis hardware \(MX240 Router\) on page 651](#)  
[show chassis hardware detail \(MX 240 Router with Routing Engine Displaying DIMM information\) on page 652](#)  
[show chassis hardware \(MX240 Router with Enhanced MX SCB\) on page 653](#)  
[show chassis hardware \(MX480 Router\) on page 654](#)  
[show chassis hardware \(MX480 Router with Enhanced MX SCB\) on page 654](#)  
[show chassis hardware \(MX960 Router\) on page 654](#)  
[show chassis hardware \(MX960 Router with Bidirectional Optics\) on page 655](#)  
[show chassis hardware \(MX960 Router with Enhanced MX SCB\) on page 656](#)  
[show chassis hardware models \(MX960 Router with Enhanced MX SCB\) on page 657](#)  
[show chassis hardware detail \(MX960 Router\) on page 658](#)  
[show chassis hardware \(MX2010 Router\) on page 658](#)  
[show chassis hardware detail \(MX2010 Router\) on page 661](#)  
[show chassis hardware extensive \(MX2010 Router\) on page 665](#)  
[show chassis hardware models \(MX2010 Router\) on page 671](#)  
[show chassis hardware clei-models \(MX2010 Routers\) on page 671](#)  
[show chassis hardware \(MX2020 Router\) on page 672](#)  
[show chassis hardware detail \(MX2020 Router\) on page 681](#)  
[show chassis hardware models \(MX2020 Router\) on page 689](#)  
[show chassis hardware clei-models \(MX2020 Router\) on page 691](#)  
[show chassis hardware \(MX Series routers with ATM MIC\) on page 692](#)  
[show chassis hardware \(MX240, MX480, MX960 routers with Application Services Modular Line Card\) on page 692](#)  
[show chassis hardware extensive \(MX240, MX480, MX960 routers with Application Services Modular Line Card\) on page 693](#)  
[show chassis hardware \(MPC4E 3D 2CGE+8XGE and MPC4E 3D 32XGE \[MX240, MX480, MX960 Routers\]\) on page 694](#)  
[show chassis hardware \(MPC4E 3D 2CGE+8XGE \[MX2020 Routers\]\) on page 695](#)  
[show chassis hardware \(T320 Router\) on page 697](#)



[show chassis hardware \(T640 Router\) on page 698](#)  
[show chassis hardware models \(T640 Router\) on page 699](#)  
[show chassis hardware extensive \(T640 Router\) on page 699](#)  
[show chassis hardware \(T4000 Router\) on page 700](#)  
[show chassis hardware \(T4000 Router with 16 GB line card chassis \(LCC\) Routing Engine\) on page 702](#)  
[show chassis hardware clei-models \(T4000 Router\) on page 703](#)  
[show chassis hardware detail \(T4000 Router\) on page 703](#)  
[show chassis hardware models \(T4000 Router\) on page 705](#)  
[show chassis hardware lcc \(TX Matrix Router\) on page 706](#)  
[show chassis hardware scc \(TX Matrix Router\) on page 707](#)  
[show chassis hardware \(T1600 Router\) on page 707](#)  
[show chassis hardware \(TX Matrix Plus Router\) on page 709](#)  
[show chassis hardware sfc \(TX Matrix Plus Router\) on page 714](#)  
[show chassis hardware extensive \(TX Matrix Plus Router\) on page 715](#)  
[show chassis hardware clei-models \(TX Matrix Plus Router\) on page 717](#)  
[show chassis hardware detail \(TX Matrix Plus Router\) on page 719](#)  
[show chassis hardware models \(TX Matrix Plus Router\) on page 721](#)  
[show chassis hardware \(16-Port 10-Gigabit Ethernet MPC with SFP+ Optics \[MX Series Routers\]\) on page 723](#)  
[show chassis hardware \(MPC3E \[MX Series Routers\]\) on page 724](#)  
[show chassis hardware \(QFX3500 Switches\) on page 725](#)  
[show chassis hardware detail \(QFX3500 Switches\) on page 725](#)  
[show chassis hardware models \(QFX3500 Switches\) on page 727](#)  
[show chassis hardware clei-models \(QFX3500 Switches\) on page 727](#)  
[show chassis hardware interconnect-device \(QFabric Systems\) on page 727](#)  
[show chassis hardware node-device \(QFabric Systems\) on page 727](#)  
[show chassis hardware \(PTX5000 Packet Transport Switch\) on page 727](#)  
[show chassis hardware clei-models \(PTX5000 Packet Transport Switch\) on page 728](#)  
[show chassis hardware detail \(PTX5000 Packet Transport Switch\) on page 729](#)  
[show chassis hardware models \(PTX5000 Packet Transport Switch\) on page 731](#)  
[show chassis hardware extensive \(PTX5000 Packet Transport Switch\) on page 731](#)  
[show chassis hardware \(MX Routers with Media Services Blade \[MSB\]\) on page 732](#)  
[show chassis hardware extensive \(MX Routers with Media Services Blade \[MSB\]\) on page 732](#)

**Output Fields** [Table 48 on page 633](#) lists the output fields for the **show chassis hardware** command. Output fields are listed in the approximate order in which they appear.



Table 48: show chassis hardware Output Fields

Field Name	Field Description	Level of Output
<b>Item</b>	<p>Chassis component:</p> <ul style="list-style-type: none"> <li>(EX Series switches)—Information about the chassis, Routing Engine (SRE and Routing Engine modules in EX8200 switches), power supplies, fan trays, and LCD panel. Also displays information about Flexible PIC Concentrators (FPCs) and associated Physical Interface Cards (PICs). Information about the backplane, midplane, and SIBs (SF modules) is displayed for EX8200 switches. See EX Series Switches Hardware and CLI Terminology Mapping.</li> <li>(MX Series routers)—Information about the backplane, Routing Engine, Power Entry Modules (PEMs), and fan trays. Also displays information about Flexible PIC Concentrators (FPCs) and associated Physical Interface Cards (PICs), Modular Port Concentrators (MPCs) and associated Modular Interface Cards (MICs), or Dense Port Concentrators (DPCs). MX80 routers have a single Routing Engine and a built-in Packet Forwarding Engine that attaches directly to MICs. The Packet Forwarding Engine has two “pseudo” FPCs (FPC 0 and FPC1). MX80 routers also have a Forwarding Engine Board (FEB).</li> <li>(M Series routers, except for the M320 router)—Information about the backplane; power supplies; fan trays; Routing Engine; maxicab (the connection between the Routing Engine and the backplane, for the M40 router only); SCB, SSB, SFM, or FEB; MCS and PCG (for the M160 router only); each FPC and PIC; and each fan, blower, and impeller.</li> <li>(M120, M320, and T Series routers)—Information about the backplane, power supplies, fan trays, midplane, FPM (craft interface), CIP, PEM, SCG, CB, FPC, PIC, SFP, SPMB, and SIB.</li> <li>(QFX Series)—Information about the chassis, Routing Engine, power supplies, fan trays, Interconnect devices, and Node devices. Also displays information about Flexible PIC Concentrators (FPCs) and associated Physical Interface Cards (PICs).</li> <li>(PTX Series)—Information about the chassis, midplane, craft interface (FPM), power distribution units (PDUs) and Power Supply Modules (PSMs), Centralized Clock Generators (CCGs), Routing Engines, Control Boards (CBs) and Switch Processor Mezzanine Boards (SPMBs), Flexible PIC Concentrators (FPCs), PICs, Switch Interface Boards (SIBs), and fan trays (vertical and horizontal).</li> <li>(MX2010 and MX2020 routers)—Information about the chassis, midplane, craft interface (FPM), power midplane (PMP), Power Supply Modules (PSMs), Power Distribution Modules (PDMs), Routing Engines, Control Boards (CBs) and Switch Processor Mezzanine Boards (SPMBs), Switch Fabric Boards (SFBs), Flexible PIC Concentrators (FPCs), PICs, adapter cards (ADCs) and fan trays.</li> </ul>	All levels
<b>Version</b>	Revision level of the chassis component.	All levels
<b>Part number</b>	Part number of the chassis component.	All levels
<b>Serial number</b>	Serial number of the chassis component. The serial number of the backplane is also the serial number of the router chassis. Use this serial number when you need to contact Juniper Networks Customer Support about the router or switch chassis.	All levels
<b>Assb ID or Assembly ID</b>	( <b>extensive</b> keyword only) Identification number that describes the FRU hardware.	<b>extensive</b>



Table 48: show chassis hardware Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Assembly Version</b>	( <b>extensive</b> keyword only) Version number of the FRU hardware.	<b>extensive</b>
<b>Assembly Flags</b>	( <b>extensive</b> keyword only) Flags.	<b>extensive</b>
<b>FRU model number</b>	( <b>clei-models</b> , <b>extensive</b> , and <b>models</b> keyword only) Model number of the FRU hardware component.	none specified
<b>CLEI code</b>	( <b>clei-models</b> and <b>extensive</b> keyword only) Common Language Equipment Identifier code. This value is displayed only for hardware components that use ID EEPROM format v2. This value is not displayed for components that use ID EEPROM format v1.	none specified
<b>EEPROM Version</b>	ID EEPROM version used by the hardware component: <b>0x00</b> (version 0), <b>0x01</b> (version 1), or <b>0x02</b> (version 2).	<b>extensive</b>
<b>Description</b>	<p>Brief description of the hardware item:</p> <ul style="list-style-type: none"> <li>• Type of power supply.</li> <li>• Type of PIC. If the PIC type is not supported on the current software release, the output states <b>Hardware Not Supported</b>.</li> <li>• Type of FPC: <b>FPC Type 1</b>, <b>FPC Type 2</b>, <b>FPC Type 3</b>, <b>FPC Type 4</b>, or <b>FPC TypeOC192</b>.</li> </ul> <p>On EX Series switches, a brief description of the FPC.</p> <p>On the J Series routers, the FPC type corresponds to the Physical Interface Module (PIM). The following list shows the PIM abbreviation in the output and the corresponding PIM name.</p> <ul style="list-style-type: none"> <li>• <b>2x FE</b>—Either two built-in Fast Ethernet interfaces (fixed PIM) or dual-port Fast Ethernet PIM</li> <li>• <b>4x FE</b>—4-port Fast Ethernet ePIM</li> <li>• <b>1x GE Copper</b>—Copper Gigabit Ethernet ePIM (one 10-Mbps, 100-Mbps, or 1000-Mbps port)</li> <li>• <b>1x GE SFP</b>—SFP Gigabit Ethernet ePIM (one fiber port)</li> <li>• <b>4x GE Base PIC</b>—Four built-in Gigabit Ethernet ports on a J4350 or J6350 chassis (fixed PIM)</li> <li>• <b>2x Serial</b>—Dual-port serial PIM</li> <li>• <b>2x T1</b>—Dual-port T1 PIM</li> <li>• <b>2x E1</b>—Dual-port E1 PIM</li> <li>• <b>2x CTIE1</b>—Dual-port channelized T1/E1 PIM</li> <li>• <b>1x T3</b>—T3 PIM (one port)</li> <li>• <b>1x E3</b>—E3 PIM (one port)</li> <li>• <b>4x BRI S/T</b>—4-port ISDN BRI S/T PIM</li> <li>• <b>4x BRI U</b>—4-port ISDN BRI U PIM</li> <li>• <b>1x ADSL Annex A</b>—ADSL 2/2+ Annex A PIM (one port, for POTS)</li> <li>• <b>1x ADSL Annex B</b>—ADSL 2/2+ Annex B PIM (one port, for ISDN)</li> <li>• <b>2x SHDSL (ATM)</b>—G SHDSL PIM (2-port two-wire module or 1-port four-wire module)</li> </ul>	All levels



Table 48: show chassis hardware Output Fields (*continued*)

Field Name	Field Description	Level of Output
	<ul style="list-style-type: none"> <li>• <b>1x TGM550</b>—TGM550 Telephony Gateway Module (Avaya VoIP gateway module with one console port, two analog <b>LINE</b> ports, and two analog <b>TRUNK</b> ports)</li> <li>• <b>1x DS1 TIM510</b>—TIM510 E1/T1 Telephony Interface Module (Avaya VoIP media module with one E1 or T1 trunk termination port and ISDN PRI backup)</li> <li>• <b>4x FXS, 4x FXO, TIM514</b>—TIM514 Analog Telephony Interface Module (Avaya VoIP media module with four analog <b>LINE</b> ports and four analog <b>TRUNK</b> ports)</li> <li>• <b>4x BRI TIM521</b>—TIM521 BRI Telephony Interface Module (Avaya VoIP media module with four ISDN BRI ports)</li> <li>• <b>Crypto Accelerator Module</b>—For enhanced performance of cryptographic algorithms used in IP Security (IPsec) services</li> <li>• <b>MPC M16x10GE</b>—16-port 10-Gigabit Module Port Concentrator that supports SFP+ optical transceivers. (Not on EX Series switches.)</li> <li>• For hosts, the Routing Engine type.</li> <li>• For small form-factor pluggable transceiver (SFP) modules, the type of fiber: <b>LX</b>, <b>SX</b>, <b>LH</b>, or <b>T</b>.</li> <li>• LCD description for EX Series switches (except EX2200 switches).</li> <li>• <b>MPC2</b>—1-port MPC2 that supports two separate slots for MICs.</li> <li>• <b>MPC3E</b>—1-port MPC3E that supports two separate slots for MICs (MIC-3D-1X100GE-CFP and MIC-3D-20GE-SFP) on MX960, MX480, and MX240 routers. The MPC3E maps one MIC to one PIC (1 MIC, 1 PIC), which differs from the mapping of legacy MPCs.</li> <li>• 100GBASE-LR4, pluggable CFP optics</li> <li>• Supports the Enhanced MX Switch Control Board with fabric redundancy and existing SCBs without fabric redundancy.</li> <li>• Interoperates with existing MX Series line cards, including Flexible Port Concentrators (FPC), Dense Port Concentrators (DPCs), and Modular Port Concentrators (MPCs).</li> <li>• <b>MPC4E</b>—Fixed configuration MPC4E that is available in two flavors: MPC4E-3D-32XGE-SFP and MPC4E-3D-2CGE-8XGE) on MX2020, MX960, MX480, and MX240 routers.</li> <li>• LCD description for MX Series routers</li> </ul>	



## Sample Output

show chassis hardware  
(EX8216 Switch)

user@host> show chassis hardware

Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis	REV 06		CY0109220035	EX8216
Midplane	REV 06	710-016845	BA0909120112	EX8216-MP
CB 0	REV 22	710-020771	AX0109197723	EX8216-RE320
CB 1	REV 22	710-020771	AX0109197726	EX8216-RE320
Routing Engine 1		BUILTIN	BUILTIN	RE-EX8216
FPC 3	REV 19	710-020683	BC0109083125	EX8200-48F
CPU	REV 13	710-020598	BF0109144549	EX8200-CPU
FPC 4	REV 17	710-020683	BC0108500127	EX8200-48F
CPU	REV 10	710-020598	BF0108460510	EX8200-CPU
PIC 0		BUILTIN	BUILTIN	48x 100 Base-QFX/1000
Base-X				
Xcvr 1	REV 01	740-011613	PE70V89	SFP-SX
Xcvr 11	REV 01	740-011613	PE70YCE	SFP-SX
Xcvr 12	REV 01	740-011613	PE70VSH	SFP-SX
Xcvr 13	REV 01	740-011613	E08C02063	SFP-SX
Xcvr 14	REV 01	740-011613	PE70VKU	SFP-SX
Xcvr 15	REV 01	740-011613	E08E03372	SFP-SX
Xcvr 21	REV 01	740-011613	PE70VAD	SFP-SX
Xcvr 22	REV 01	740-011613	E08E01228	SFP-SX
Xcvr 23	REV 01	740-011613	PE70VSL	SFP-SX
Xcvr 24	REV 01	740-011613	E08E03409	SFP-SX
Xcvr 25	REV 01	740-011613	PE70VL4	SFP-SX
Xcvr 26	REV 01	740-011613	PDQ4L2Z	SFP-SX
Xcvr 27	REV 01	740-011613	PE70WFK	SFP-SX
Xcvr 28	REV 01	740-011782	PBD2B5U	SFP-SX
Xcvr 29	REV 01	740-011613	PE70UQX	SFP-SX
Xcvr 30	REV 01	740-011613	PE70VL5	SFP-SX
Xcvr 31	REV 01	740-011613	PE70V0F	SFP-SX
Xcvr 32	REV 01	740-011613	E08C02052	SFP-SX
Xcvr 33	REV 01	740-011613	E08C02197	SFP-SX
Xcvr 34	REV 01	740-011613	PE70V0L	SFP-SX
Xcvr 35	REV 01	740-011613	E08E03390	SFP-SX
Xcvr 36	REV 01	740-011613	PDQ4VL9	SFP-SX
Xcvr 37	REV 01	740-011613	E08E03370	SFP-SX
Xcvr 38	REV 01	740-011613	E08E03362	SFP-SX
Xcvr 39	REV 01	740-011613	E08C02065	SFP-SX
Xcvr 40	REV 01	740-011613	E08E03405	SFP-SX
Xcvr 41	REV 01	740-011613	E08E03411	SFP-SX
Xcvr 43	REV 01	740-011613	E08C02171	SFP-SX
Xcvr 45	REV 01	740-011613	E08E03410	SFP-SX
FPC 13	REV 16	710-016837	BB0109051344	EX8200-8XS
CPU				
SIB 0	REV 10	710-021613	AY0109166244	EX8216-SF320
SIB 1	REV 10	710-021613	AY0109166357	EX8216-SF320
SIB 2	REV 10	710-021613	AY0109166362	EX8216-SF320
SIB 3	REV 10	710-021613	AY0109166338	EX8216-SF320
SIB 4	REV 10	710-021613	AY0109166350	EX8216-SF320
SIB 5	REV 10	710-021613	AY0109166365	EX8216-SF320
SIB 6	REV 10	710-021613	AY0109166361	EX8216-SF320
SIB 7	REV 10	710-021613	AY0109166399	EX8216-SF320
PSU 0	REV 17	740-021466	BG0709170003	EX8200-AC2K
PSU 1	REV 17	740-021466	BG0709170004	EX8200-AC2K
PSU 2	REV 17	740-021466	BG0709170020	EX8200-AC2K
PSU 3	REV 17	740-021466	BG0709170017	EX8200-AC2K
PSU 4	REV 17	740-021466	BG0709170008	EX8200-AC2K



PSU 5	REV 17	740-021466	BG0709170018	EX8200-AC2K
Top Fan Tray				
FTC 0	REV 4	760-022620	CX1209140212	EX8216-FT
FTC 1	REV 4	760-022620	CX1209140212	EX8216-FT
Bottom Fan Tray				
FTC 0	REV 4	760-022620	CX1209140211	EX8216-FT
FTC 1	REV 4	760-022620	CX1209140211	EX8216-FT
LCD 0	REV 04	710-025742	CE0109186919	EX8200 LCD

#### show chassis hardware clei-models (EX8216 Switch)

```
user@host> show chassis hardware clei-models
Hardware inventory:
```

Item	Version	Part number	CLEI code	FRU model number
Midplane	REV 08	710-016845		
PSU 0	REV 05	740-023002	COUPAEAEAA	EX8200-PWR-AC3KR
PSU 1	REV 05	740-023002	COUPAEAEAA	EX8200-PWR-AC3KR
PSU 2	REV 05	740-023002	COUPAEAEAA	EX8200-PWR-AC3KR
PSU 3	REV 05	740-023002	COUPAEAEAA	EX8200-PWR-AC3KR
PSU 4	REV 05	740-023002	COUPAEAEAA	EX8200-PWR-AC3KR
PSU 5	REV 05	740-023002	COUPAEAEAA	EX8200-PWR-AC3KR
Top Fan Tray				
Bottom Fan Tray				

#### show chassis hardware clei-models (T1600 Router)

```
user@host> show chassis hardware clei-models
Hardware inventory:
```

Item	Version	Part number	CLEI code	FRU model number
Midplane	REV 03	710-005608		CHAS-BP-T640-S
FPM Display	REV 05	710-002897		CRAFT-T640-S
CIP	REV 06	710-002895		CIP-L-T640-S
PEM 0	Rev 07	740-017906	IPUPAC7KTA	PWR-T1600-3-80-DC-S
PEM 1	Rev 18	740-002595		PWR-T-DC-S
SCG 0	REV 15	710-003423		SCG-T-S
Routing Engine 0	REV 08	740-014082		RE-A-2000-4096-S
Routing Engine 1	REV 07	740-014082		RE-A-2000-4096-S
CB 0	REV 05	710-007655		CB-T-S
CB 1	REV 03	710-017707		CB-T-S
FPC 0	REV 07	710-013558		T640-FPC2-E2
PIC 0	REV 01	750-010618		PB-4GE-SFP
PIC 1	REV 06	750-001900		PB-10C48-SON-SMSR
PIC 2	REV 14	750-001901		PB-40C12-SON-SMIR
PIC 3	REV 07	750-001900		PB-10C48-SON-SMSR
FPC 1	REV 06	710-013553		T640-FPC1-E2
PIC 0	REV 08	750-001072		P-1GE-SX
PIC 1	REV 10	750-012266		PB-4GE-TYPE1-SFP-IQ2
PIC 2	REV 22	750-005634		PB-1CHOC12SMIR-QPP
FPC 2				
PIC 0	REV 16	750-007141		PC-10GE-SFP
PIC 1	REV 06	750-015217		PC-8GE-TYPE3-SFP-IQ2
PIC 2	REV 05	750-004695		PC-TUNNEL
PIC 3	REV 17	750-009553		PC-40C48-SON-SFP
FPC 3	REV 01	710-010154		T640-FPC3-E
PIC 0	REV 07	750-012793		PC-1XGE-TYPE3-XFP-IQ2
PIC 1	REV 25	750-007141		PC-10GE-SFP
PIC 2	REV 17	750-009553		PC-40C48-SON-SFP
PIC 3	REV 32	750-003700		PC-10C192-SON-VSR
FPC 4	REV 16	710-013037		T1600-FPC4-ES
PIC 1	REV 06	750-034781		PD-1CE-CFP
FPC 5	REV 02	710-013037		T1600-FPC4-ES
PIC 0	REV 16	750-012518		PD-40C192-SON-XFP
PIC 1	REV 01	750-010850		PD-10C768-SON-SR
FPC 6	REV 14	710-013037		T1600-FPC4-ES



PIC 0	REV 11	750-017405	PD-4XGE-XFP
PIC 1	REV 13	750-017405	PD-4XGE-XFP
FPC 7	REV 09	710-007529	T640-FPC3
PIC 0	REV 10	750-012793	PC-1XGE-TYPE3-XFP-IQ2
PIC 1	REV 01	750-015217	PC-8GE-TYPE3-SFP-IQ2
PIC 2	REV 01	750-015217	PC-8GE-TYPE3-SFP-IQ2
PIC 3	REV 15	750-009450	PC-10C192-S0N-SR2
SIB 0	REV 07	710-013074	SIB-I-T1600-S
SIB 1	REV 07	710-013074	SIB-I-T1600-S
SIB 2	REV 07	710-013074	SIB-I-T1600-S
SIB 3	REV 07	710-013074	SIB-I-T1600-S
SIB 4	REV 07	710-013074	SIB-I-T1600-S
Fan Tray 0			FANTRAY-T-S
Fan Tray 1			FANTRAY-T-S
Fan Tray 2			FAN-REAR-TX-T640-S

#### show chassis hardware detail (EX4200 Switch)

```
user@host> show chassis hardware detail
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis			BM0208327733	EX4200-24T
Routing Engine 0	REV 11	750-021256	BM0208327733	EX4200-24T, 8 POE
Routing Engine 0			BM0208327733	EX4200-24T, 8 POE
FPC 0	REV 11	750-021256	BM0208327733	EX4200-24T, 8 POE
CPU		BUILTIN	BUILTIN	FPC CPU
PIC 0		BUILTIN	BUILTIN	24x 10/100/1000 Base-T
PIC 1	REV 03B	711-021270	AR0208162285	4x GE SFP
BRD	REV 08	711-021264	AK0208328289	EX4200-24T, 8 POE
Power Supply 0	REV 03	740-020957	AT0508346354	PS 320W AC
Fan Tray				Fan Tray

#### show chassis hardware models (EX4500 Switch)

```
user@host> show chassis hardware models
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	FRU model number
Routing Engine 0	REV 01	750-035700	GG0210271867	EX4500-40F-FB-C
FPC 0	REV 01	750-035700	GG0210271867	EX4500-40F-FB-C
PIC 0		BUILTIN	BUILTIN	EX4500-40F-FB-C
Power Supply 1	REV 01	740-029654	H884FS00JC09	EX4500-PWR1-AC-FB

#### show chassis hardware (J6350 Router)

```
user@host> show chassis hardware
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis			JN1090E07ADB	JSR6350
Midplane	REV 03	710-014593	NP1265	
System IO	REV 01	710-016210	NN9950	JX350 System IO
Crypto Module				Crypto Acceleration
Routing Engine	REV 08	710-015273	NM6509	RE-J6350-3400
ad0	248 MB	256MB CKS	00102006C24A00000039	Compact
Flash				
FPC 0				FPC
PIC 0				4x GE Base PIC
FPC 1	REV 06	750-010355	AI07030023	FPC
PIC 0				2x T1
FPC 3	REV 06	750-011148	AJ06520151	FPC
PIC 0				2x E1
FPC 6	REV 06	750-013492	NC4170	FPC
PIC 0				4x FE
Power Supply 0				



**show chassis hardware  
(J6300 Router)**

user@host&gt; show chassis hardware

Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			JN000164AB	J6300
Midplane	REV 02.04	710-010001	CORE99570	
System IO	REV 02.00	710-010003	CORE100848	System IO board
Routing Engine	RevX2.6	750-010006	IWGS40735390	RE-J.3
FPC 0				FPC
PIC 0				2x FE
FPC 1	RevX2.0	750-011380	N3960005	FPC
PIC 0				1xADSL pic Annex A
FPC 2	RevX2.0	750-011380	N3960002	FPC
PIC 0				1xADSL pic Annex B
FPC 3	REV 03	750-010354	N0780028	FPC
PIC 0				1x T3

**show chassis hardware  
(M7i Router)**

user@host&gt; show chassis hardware

Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			31959	M7i
Midplane	REV 02	710-008761	CA0209	M7i Midplane
Power Supply 0	Rev 04	740-008537	PD10272	AC Power Supply
Routing Engine	REV 01	740-008846	1000396803	RE-5.0
CFEB	REV 02	750-009492	CA0166	Internet Processor IIv1
FPC 0				E-FPC
PIC 0	REV 04	750-003163	HJ6416	1x G/E, 1000 BASE-SX
PIC 1	REV 04	750-003163	HJ6423	1x G/E, 1000 BASE-SX
PIC 2	REV 04	750-003163	HJ6421	1x G/E, 1000 BASE-SX
PIC 3	REV 02	750-003163	HJ0425	1x G/E, 1000 BASE-SX
FPC 1				E-FPC
PIC 2	REV 01	750-009487	HM2275	ASP - Integrated
PIC 3	REV 01	750-009098	CA0142	2x F/E, 100 BASE-TX

Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			B1157	M7i
Midplane	REV 05	710-008761	DM0840	M7i Midplane
Power Supply 0	Rev 08	740-008537	TE53755	AC Power Supply
Routing Engine	REV 07	740-011202	1000736567	RE-850
CFEB	REV 09	750-010463	DK6952	Internet Processor II
FPC 0				E-FPC
PIC 0	REV 12	750-012838	DL7993	4x 1GE(LAN), IQ2
Xcvr 0	REV 01	740-011614	PD94TDJ	SFP-LX10
Xcvr 1	REV 01	740-011615	PAD5EER	UNSUPPORTED
Xcvr 2	REV 01	740-011614	PD94THU	SFP-LX10
Xcvr 3		NON-JNPR	PDC2E7A	SFP-LX10
PIC 1	REV 03	750-023116	JT0203	4x CHSTM1 SDH CE SFP
Xcvr 0	REV 01	740-012434	AGT063832PS	SFP-SR
Xcvr 1	REV 01	740-012434	AGT063832LY	SFP-SR
Xcvr 3	REV 01	740-016064	C06J19018	SFP-LR
PIC 2	REV 15	750-014895	DM5757	MultiServices 100
PIC 3	REV 01	750-025390	JW9448	12x T1/E1 CE
FPC 1				E-FPC
PIC 2		BUILTIN	BUILTIN	1x Tunnel
PIC 3	REV 09	750-009099	DM0899	1x G/E, 1000 BASE
Xcvr 0	REV 01	740-012434	AGT07150HGJ	UNSUPPORTED
Fan Tray				Rear Fan Tray

**show chassis hardware**

user@host&gt; show chassis hardware

Hardware inventory:



## (M10 Router)

Item	Version	Part number	Serial number	Description
Chassis			1122	M10
Midplane	REV 1.1	710-001950	S/N AC6626	
Power supply A	Rev 01	740-002497	S/N LC36095	AC
Power supply B	Rev 01	740-002497	S/N LC36100	AC
Display	REV 1.2	710-001995	S/N AC6656	
Host			18000005dfb3fb01	teknor
FEB	REV 01	710-001948	S/N AC6632	Internet Processor II
FPC 0				
PIC 0	REV 08	750-001072	S/N AB2485	1x G/E, 1000 BASE-SX
PIC 1	REV 01	750-000613	S/N AA1048	1x OC-12 SONET, SMIR
FPC 1				
Fan Tray 0				FANTRAY-M10I-S
Fan Tray 1				FANTRAY-M10I-S

## show chassis hardware models (M10 Router)

```
user@host> show chassis hardware models
Hardware inventory:
```

Item	Version	Part number	CLEI code	FRU model number
Midplane	REV 04	710-008920		CHAS-MP-M10i-S
Power Supply 0	Rev 06	740-008537		PWR-M10i-M7i-AC-S
Power Supply 1	Rev 06	740-008537		PWR-M10i-M7i-AC-S
HCM 0	REV 03	710-010580		HCM-M10i-S
HCM 1	REV 03	710-010580		HCM-M10i-S
Routing Engine 0	REV 09	740-009459		RE-400-256-S
CFEB 0	REV 05	750-010465		FEB-M10i-M7i-S
FPC 0				
PIC 0	REV 10	750-002971		PE-40C3-SON-MM
PIC 1	REV 11	750-002992		PE-4FE-TX
PIC 2	REV 03	750-002977		PE-20C3-ATM-MM
PIC 3	REV 08	750-005724		PE-20C3-ATM2-MM
FPC 1				
PIC 2	REV 12	750-008425		PE-AS
PIC 3	REV 13	750-005636		PE-4CHDS3-QPP
Fan Tray 0				FANTRAY-M10I-S
Fan Tray 1				FANTRAY-M10I-S

## show chassis hardware (M20 Router)

```
user@host> show chassis hardware
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis			20033	M20
Backplane	REV 07	710-001517	S/N AA7940	
Power supply B	Rev 01	740-001465	S/N 000001	AC
Display	REV 02	710-001519	S/N AA9704	
Host 0			98000004f8f27501	teknor
SSB slot 0	REV 01	710-001951	S/N AD5905	Internet Processor II
SSRAM bank 0	REV 01	710-001385	S00480	2 MB
SSRAM bank 1	REV 01	710-001385	S00490	2 MB
SSRAM bank 2	REV 01	710-001385	S001:?	2 MB
SSRAM bank 3	REV 01	710-001385	S00483	2 MB
SSB slot 1	N/A	N/A	N/A	Backup
FPC 1	REV 01	710-001292	S/N AB7528	
SSRAM	REV 01	710-000077	S/N 304209	1 MB
SDRAM bank 0	REV 01	710-000099	S/N 000603	64 MB
SDRAM bank 1	REV 01	710-000099	S/N 000414	64 MB
PIC 0	REV 03	750-000612	S/N AB8433	2x OC-3 ATM, MM
PIC 1	REV 01	750-000616	S/N AA1168	1x OC-12 ATM, MM
PIC 2	REV 01	750-000613	S/N AA1008	1x OC-12 SONET, SMIR
PIC 3	REV 01	750-002501	S/N AD5810	4x E3
FPC 2	REV 01	710-001292	S/N AC0119	
SSRAM	REV 01	710-000077	S/N 503241	1 MB



SDRAM bank 0	REV 01	710-000099	S/N 306835	64 MB
SDRAM bank 1	REV 01	710-000099	S/N 306832	64 MB
Fan Tray 0				Front Upper Fan Tray
Fan Tray 1				Front Middle Fan Tray
Fan Tray 2				Front Bottom Fan Tray
Fan Tray 3				Rear Fan Tray

#### show chassis hardware models (M20 Router)

```
user@host> show chassis hardware models
```

```
Hardware inventory:
```

Item	Version	Part number	CLEI code	FRU model number
Backplane	REV 03	710-002334		CHAS-MP-M20-S
Power Supply A	REV 06	740-001465		PWR-M20-AC-S
Display	REV 04	710-001519		CRAFT-M20-S
Routing Engine 0	REV 06	740-003239		RE-333-768-S
Routing Engine 1	REV 06	740-003239		RE-333-768-S
SSB 0	REV 02	710-001951		SSB-E-M20
SSB 1	N/A	N/A		
FPC 0	REV 03	710-003308		FPC-E
PIC 0	REV 08	750-002303		P-4FE-TX
PIC 1	REV 07	750-004745		P-2MCDS3
PIC 2	REV 03	750-002965		PE-4CHDS3
FPC 1	REV 03	710-003308		FPC-E
PIC 0	REV 03	750-002914		P-20C3-ATM-MM
Fan Tray 0				FANTRAY-F-M20-S
Fan Tray 1				FANTRAY-F-M20-S
Fan Tray 2				FANTRAY-F-M20-S
Fan Tray 3				FANTRAY-R-M20-S

#### show chassis hardware (M40 Router)

```
user@host> show chassis hardware
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Backplane	REV 02	710-000073	S/N AA0053	
Power supply A	Rev 2	740-000235	S/N 000042	DC
Maxicab	REV X1	710-000229	S/N AA0139	
Minicab	REV X1	710-000482	S/N AA0201	
Display	REV 06	710-000150	S/N AA0905	
Host				cpv5000
SCB	REV X1	710-000075	S/N AA0158	Internet Processor I
SSRAM bank 0	REV 02	710-000077	S/N AA2267	1 MB
SSRAM bank 1	REV 02	710-000077	S/N AA2270	1 MB
SSRAM bank 2	REV 02	710-000077	S/N AA2269	1 MB
SSRAM bank 3	REV 02	710-000077	S/N AA2268	1 MB
FPC 0	REV 01	710-000175	S/N AA0048	
SSRAM	REV 01	710-000077	S/N AA2333	1 MB
SDRAM bank 0	REV 01	710-000099	S/N AA2332	64 MB
SDRAM bank 1	REV X1	710-000099	S/N AA2337	64 MB
PIC 0	REV 04	750-000613	S/N aa0343	1x OC-12 SONET, SMIR
PIC 1	REV 04	750-000613	S/N AA0379	1x OC-12 SONET, SMIR
PIC 2	REV 04	750-000613	S/N AA0377	1x OC-12 SONET, SMIR
PIC 3	REV 04	750-000613	S/N AA0378	1x Tunnel
FPC 2	REV 01	710-000175	S/N AA0042	
SSRAM	REV 02	710-000077	S/N AA2288	1 MB
SDRAM bank 0	REV 01	710-000099	S/N AA2331	64 MB
SDRAM bank 1	REV 01	710-000099	S/N AA2330	64 MB
PIC 0	REV X1	750-000603	S/N AA0143	4x OC-3 SONET, SMIR
PIC 1	REV X1	750-000615	S/N AA0149	4x OC-3 SONET, MM
PIC 2	REV X1	750-000611	S/N AA0148	4x OC-3 SONET, MM
PIC 3	REV 04	750-000613	S/N AA0330	1x OC-12 SONET, SMIR
FPC 4	REV 01	710-000175	S/N AA0050	
SSRAM	REV 01	710-000077	S/N AA2327	1 MB



SDRAM bank 0	REV 01	710-000099	S/N AA2329	64 MB
SDRAM bank 1	REV 01	710-000099	S/N AA2328	64 MB
PIC 0	REV 04	750-000613	S/N AA0320	1x OC-12 SONET, SMIR
PIC 2	REV 05	750-000616	S/N AA1341	1x OC-12 ATM, MM
PIC 3	REV 08	750-001072	S/N AB2462	1x G/E, 1000 BASE-SX
FPC 5	REV 10	710-000175	S/N AA7663	
SSRAM	REV 01	710-000077	S/N 501590	1 MB
SDRAM bank 0	REV 01	710-000099	S/N 300949	64 MB
SDRAM bank 1	REV 01	710-000099	S/N 300868	64 MB
PIC 1	REV 01	750-001323	S/N AB1670	1x Tunnel

#### show chassis hardware (M40e Router)

```
user@host> show chassis hardware
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis				m40e
Midplane	REV 01	710-005071	AX3671	
FPM CMB	REV 03	710-001642	AR9074	
FPM Display	REV 03	710-001647	AR7331	
CIP	REV 04	710-002649	BB4449	
PEM 0	Rev 01	740-003787	MC12364	Power Entry Module
PEM 1	Rev 01	740-003787	MC12383	Power Entry Module
PCG 0	REV 07	710-001568	AG1332	
PCG 1	REV 07	710-001568	AR3789	
Host 0			3e000007c8176601	Present
MCS 0	REV 11	710-001226	AN5813	
SFM 0 SPP	REV 07	710-001228	AG4676	
SFM 0 SPR	REV 05	710-002189	AE4735	Internet Processor II
SFM 1 SPP	REV 07	710-001228	AP1347	
SFM 1 SPR	REV 05	710-002189	BE0063	Internet Processor II
FPC 0	REV 01	710-011725	BE0669	M40e-EP-FPC Type 1
CPU	REV 01	710-004600	BD9504	
PIC 0	REV 03	750-003737	AY3991	4x G/E, 1000 BASE-SX
FPC 1	REV 01	710-005197	BD9842	M40e-FPC Type 2
CPU	REV 01	710-004600	BB4869	
PIC 0	REV 07	750-001900	AR8278	1x OC-48 SONET, SMSR
FPC 2	REV 02	710-005197	BD9824	M40e-FPC Type 2
CPU	REV 01	710-004600	BD9531	
PIC 0	REV 03	750-003737	AY3986	4x G/E, 1000 BASE-SX
FPC 4	REV 02	710-005078	BE0664	M40e-FPC Type 1
CPU	REV 01	710-004600	BD9559	
PIC 0	REV 03	750-001894	AG7963	1x G/E, 1000 BASE-SX
PIC 2	REV 01	750-002575	AF2472	4x OC-3 SONET, SMIR
FPC 6	REV 02	710-005078	BE0652	M40e-FPC Type 1
CPU	REV 01	710-004600	BD9607	
PIC 0	REV 02	750-002911	AN2286	4x F/E, 100 BASE-TX
PIC 2	REV 01	750-002577	AP6345	4x OC-3 SONET, MM

#### show chassis hardware (M120 Router)

```
user@host> show chassis hardware
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis			JN000054AC	M120
Midplane	REV 01	710-013667	RB4170	M120 Midplane
FPM Board	REV 02	710-011407	CJ9186	M120 FPM Board
FPM Display	REV 02	710-011405	CJ9173	M120 FPM Display
FPM CIP	REV 02	710-011410	CJ9221	M120 FPM CIP
PEM 0	Rev 05	740-011936	RM28320	AC Power Entry Module
PEM 1	Rev 05	740-011936	RM28321	AC Power Entry Module
Routing Engine 0	REV 03	740-014080	1000642883	RE-A-1000
CB 0	REV 03	710-011403	CM8346	M120 Control Board
CB 1	REV 06	710-011403	CP6728	M120 Control Board



FPC 1	REV 02	710-015908	CP6925	M120 CFPC 10GE
PIC 0		BUILTIN	BUILTIN	1x 10GE(LAN/WAN) XFP
Xcvr 0	REV 01	740-014279	62E204N00007	XFP-10G-LR
FPC 3	REV 03	710-011393	CJ9234	M120 FPC Type 2
PIC 0	REV 16	750-008155	NB5229	2x G/E IQ, 1000 BASE
Xcvr 0	REV 01	740-011613	P9F15JB	SFP-SX
Xcvr 1	REV 01	740-007326	P4Q0R9G	SFP-SX
PIC 1	REV 09	750-007745	CG4360	4x OC-3 SONET, SMIR
PIC 2	REV 16	750-008155	ND7787	2x G/E IQ, 1000 BASE
Xcvr 0	REV 01	740-011613	P9F12AS	SFP-SX
Xcvr 1	REV 01	740-011613	P9F1ALU	SFP-SX
PIC 3	REV 07	750-011800	JW1284	8x 1GE(LAN), IQ2
Xcvr 0	REV 01	740-011613	P9F1AM6	SFP-SX
Xcvr 6	REV 01	740-011613	P9F16NN	SFP-SX
Xcvr 7	REV 01	740-011782	P8C29Y7	SFP-SX
Board B	REV 02	710-011395	CN3754	M120 FPC Mezz
FPC 4	REV 02	710-011398	CP6741	M120 FPC Type 3
PIC 0	REV 16	750-007141	NB2855	10x 1GE(LAN), 1000 BASE
Xcvr 0	REV 01	740-011782	P922A1F	SFP-SX
Xcvr 1	REV 01	740-011782	P922A16	SFP-SX
Xcvr 2	REV 01	740-011782	P922A0U	SFP-SX
Xcvr 3	REV 01	740-011782	P9229UZ	SFP-SX
Xcvr 4	REV 01	740-009029	P11JXWP	SFP-LX
Xcvr 6	REV 01	740-011613	P9F1ALW	SFP-SX
FPC 5	REV 01	710-011388	CJ9088	M120 FPC Type 1
PIC 0	*** Hardware Not Supported ***			
PIC 1	REV 05	750-012052	NB0410	1x CHOC3 IQ SONET, SMLR
PIC 2	REV 01	750-013167	CM3824	4x CHDS3 IQ
PIC 3	REV 01	750-010240	CB5366	1x G/E SFP, 1000 BASE
Board B	REV 01	710-011390	CJ9103	M120 FPC Mezz Board
FEB 3	REV 04	710-011663	CP6673	M120 FEB
FEB 4	REV 04	710-011663	CJ9368	M120 FEB
FEB 5	REV 04	710-011663	CJ9386	M120 FEB
Fan Tray 0				Front Top Fan Tray
Fan Tray 1				Front Bottom Fan Tray
Fan Tray 2				Rear Top Fan Tray
Fan Tray 3				Rear Bottom Fan Tray

#### show chassis hardware detail (M120 Router)

```
user@host> show chassis hardware detail
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis			JN000054AC	M120
Midplane	REV 01	710-013667	RB4170	M120 Midplane
FPM Board	REV 02	710-011407	CJ9186	M120 FPM Board
FPM Display	REV 02	710-011405	CJ9173	M120 FPM Display
FPM CIP	REV 02	710-011410	CJ9221	M120 FPM CIP
PEM 0	Rev 05	740-011936	RM28320	AC Power Entry Module
PEM 1	Rev 05	740-011936	RM28321	AC Power Entry Module
Routing Engine 0	REV 03	740-014080	1000642883	RE-A-1000
ad0 248 MB		SILICONSYSTEMS INC	256M 126CT505S07635C	00110 Compact Flash
ad2 38154 MB		HTE541040G9SA00	MPBBT0X2HS2E3M	Hard Disk
CB 0	REV 03	710-011403	CM8346	M120 Control Board
CB 1	REV 06	710-011403	CP6728	M120 Control Board
FPC 1	REV 02	710-015908	CP6925	M120 CFPC 10GE
PIC 0		BUILTIN	BUILTIN	1x 10GE(LAN/WAN) XFP
Xcvr 0	REV 01	740-014279	62E204N00007	XFP-10G-LR
FPC 3	REV 03	710-011393	CJ9234	M120 FPC Type 2
PIC 0	REV 16	750-008155	NB5229	2x G/E IQ, 1000 BASE
Xcvr 0	REV 01	740-011613	P9F15JB	SFP-SX



Xcvr 1	REV 01	740-007326	P4Q0R9G	SFP-SX
PIC 1	REV 09	750-007745	CG4360	4x OC-3 SONET, SMIR
PIC 2	REV 16	750-008155	ND7787	2x G/E IQ, 1000 BASE
Xcvr 0	REV 01	740-011613	P9F12AS	SFP-SX
Xcvr 1	REV 01	740-011613	P9F1ALU	SFP-SX
PIC 3	REV 07	750-011800	JW1284	8x 1GE(LAN), IQ2
Xcvr 0	REV 01	740-011613	P9F1AM6	SFP-SX
Xcvr 6	REV 01	740-011613	P9F16NN	SFP-SX
Xcvr 7	REV 01	740-011782	P8C29Y7	SFP-SX
Board B	REV 02	710-011395	CN3754	M120 FPC Mezz
FPC 4	REV 02	710-011398	CP6741	M120 FPC Type 3
PIC 0	REV 16	750-007141	NB2855	10x 1GE(LAN), 1000 BASE
Xcvr 0	REV 01	740-011782	P922A1F	SFP-SX
Xcvr 1	REV 01	740-011782	P922A16	SFP-SX
Xcvr 2	REV 01	740-011782	P922A0U	SFP-SX
Xcvr 3	REV 01	740-011782	P9229UZ	SFP-SX
Xcvr 4	REV 01	740-009029	P11JXWP	SFP-LX
Xcvr 6	REV 01	740-011613	P9F1ALW	SFP-SX
FPC 5	REV 01	710-011388	CJ9088	M120 FPC Type 1
PIC 0	*** Hardware Not Supported ***			
PIC 1	REV 05	750-012052	NB0410	1x CHOC3 IQ SONET, SMLR
PIC 2	REV 01	750-013167	CM3824	4x CHDS3 IQ
PIC 3	REV 01	750-010240	CB5366	1x G/E SFP, 1000 BASE
Board B	REV 01	710-011390	CJ9103	M120 FPC Mezz Board
FEB 3	REV 04	710-011663	CP6673	M120 FEB
FEB 4	REV 04	710-011663	CJ9368	M120 FEB
FEB 5	REV 04	710-011663	CJ9386	M120 FEB
Fan Tray 0				Front Top Fan Tray
Fan Tray 1				Front Bottom Fan Tray
Fan Tray 2				Rear Top Fan Tray
Fan Tray 3				Rear Bottom Fan Tray

### show chassis hardware models (M120 Router)

user@host> show chassis hardware models  
Hardware inventory:

Item	Version	Part number	CLEI code	FRU model number
Midplane	REV 01	710-013667		
FPM CIP	REV 02	710-011410		CRAFT-M120-S
PEM 0	Rev 05	740-011936		PWR-M120-AC-S
PEM 1	Rev 05	740-011936		PWR-M120-AC-S
Routing Engine 0	REV 03	740-014080		RE-A-1000-2048-S
CB 0	REV 03	710-011403		CB-M120-S
CB 1	REV 06	710-011403		CB-M120-S
FPC 1	REV 02	710-015908		M120-cFPC-1XGE-XFP
FPC 3				
PIC 0	REV 16	750-008155		PB-2GE-SFP-QPP
PIC 1	REV 09	750-007745		PC-40C3-SON-SMIR
PIC 2	REV 16	750-008155		PB-2GE-SFP-QPP
PIC 3	REV 07	750-011800		PB-8GE-TYPE2-SFP-IQ2
FPC 4				
PIC 0	REV 16	750-007141		PC-10GE-SFP
FPC 5				
PIC 1	REV 05	750-012052		PB-1CHOC3-SMIR-QPP
PIC 2	REV 01	750-013167		PE-4CHDS3-QPP
PIC 3	REV 01	750-010240		PB-1GE-SFP
Fan Tray 0				FFANTRAY-M120-S
Fan Tray 1				FFANTRAY-M120-S
Fan Tray 2				RFANTRAY-M120-S
Fan Tray 3				RFANTRAY-M120-S



### show chassis hardware (M160 Router)

```

user@host> show chassis hardware
Item          Version  Part number  Serial number  Description
Chassis                               101          M160
Midplane      REV 02   710-001245   S/N AB4107
FPM CMB       REV 01   710-001642   S/N AA2911
FPM Display   REV 01   710-001647   S/N AA2999
CIP           REV 02   710-001593   S/N AA9563
PEM 0         Rev 01   740-001243   S/N KJ35769    DC
PEM 1         Rev 01   740-001243   S/N KJ35765    DC
PCG 0         REV 01   710-001568   S/N AA9794
PCG 1         REV 01   710-001568   S/N AA9804
Host 1
MCS 1         REV 03   710-001226   S/N AA9777
SFM 0 SPP     REV 04   710-001228   S/N AA2975
SFM 0 SPR     REV 02   710-001224   S/N AA9838      Internet Processor I
SFM 1 SPP     REV 04   710-001228   S/N AA2860
SFM 1 SPR     REV 01   710-001224   S/N AB0139      Internet Processor I
FPC 0         REV 03   710-001255   S/N AA9806      FPC Type 1
CPU           REV 02   710-001217   S/N AA9590
PIC 1         REV 05   750-000616   S/N AA1527      1x OC-12 ATM, MM
PIC 2         REV 05   750-000616   S/N AA1535      1x OC-12 ATM, MM
PIC 3         REV 01   750-000616   S/N AA1519      1x OC-12 ATM, MM
FPC 1         REV 02   710-001611   S/N AA9523      FPC Type 2
CPU           REV 02   710-001217   S/N AA9571
PIC 0         REV 03   750-001900   S/N AA9626      1x STM-16 SDH, SMIR
PIC 1         REV 01   710-002381   S/N AD3633      2x G/E, 1000 BASE-SX
FPC 2
CPU           REV 03   710-001217   S/N AB3329
PIC 0         REV 01
Fan Tray 0    Rear Bottom Blower
Fan Tray 1    Rear Top Blower
Fan Tray 2    Front Top Blower
Fan Tray 3    Front Fan Tray

```

### show chassis hardware models (M160 Router)

```

user@host> show chassis hardware models
Hardware inventory:
Item          Version  Part number  CLEI code  FRU model number
Midplane      REV 03   710-009120
FPM Display   REV 02   710-009351   CRAFT-M320-S
CIP           REV 03   710-005926   CIP-M320-S
PEM 2         Rev X4   740-009148   PWR-M-DC-S
PEM 3         Rev X4   740-009148   PWR-M-DC-S
Routing Engine 0 REV 02   740-008883   RE-1600-2048-S
Routing Engine 1 REV 02   740-008883   RE-1600-2048-S
FPC 0         REV 02   710-010419   M320-FPC1
PIC 0         REV 01   750-001323   P-TUNNEL
PIC 1         REV 02   750-002987   PE-10C12-SON-SMIR
PIC 2         REV 04   750-001894   PB-1GE-SX
PIC 3         REV 04   750-001896   PB-10C12-SON-SMIR
FPC 1         REV 02   710-010419   M320-FPC1
PIC 0         REV 04   750-001894   PB-1GE-SX
PIC 1         REV 04   750-001894   PB-1GE-SX
PIC 3         REV 03   750-001894   PB-1GE-SX
FPC 2         REV 02   710-010419   M320-FPC1
PIC 0         REV 10   750-005634   PB-1CHOC12SMIR-QPP
PIC 1         REV 10   750-005634   PB-1CHOC12SMIR-QPP
PIC 2         REV 07   750-005634   PB-1CHOC12SMIR-QPP
PIC 3         REV 07   750-005634   PB-1CHOC12SMIR-QPP
PIC 1         REV 10   750-005634   PB-1CHOC12SMIR-QPP
PIC 2         REV 07   750-005634   PB-1CHOC12SMIR-QPP

```



PIC 3	REV 07	750-005634	PB-1CHOC12SMIR-QPP
FPC 3			
PIC 0	REV 03	750-001895	PB-10C12-SON-MM
PIC 1	REV 04	750-001894	PB-1GE-SX
PIC 3	REV 04	750-003141	PB-1GE-SX-B
FPC 4	REV 02	710-010419	M320-FPC1
FPC 5	REV 02	710-010419	M320-FPC1
FPC 6	REV 02	710-010419	M320-FPC1
FPC 7			
PIC 0	REV 15	750-001901	PB-40C12-SON-SMIR
PIC 1	REV 06	750-001900	PB-10C48-SON-SMSR
PIC 2	REV 07	750-001900	PB-10C48-SON-SMSR
PIC 3	REV 05	750-003737	PB-4GE-SX
SIB 0	REV 03	710-009184	SIB-M-S
SIB 1	REV 03	710-009184	SIB-M-S
SIB 2	REV 03	710-009184	SIB-M-S
SIB 3	REV 03	710-009184	SIB-M-S
Fan Tray 0			FFANTRAY-M320-S
Fan Tray 1			FFANTRAY-M320-S
Fan Tray 2			RFANTRAY-M320-S

#### show chassis hardware detail (M160 Router)

user@host> show chassis hardware detail

Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			101	M160
Midplane	REV 02	710-001245	S/N AB4107	
FPM CMB	REV 01	710-001642	S/N AA2911	
FPM Display	REV 01	710-001647	S/N AA2999	
CIP	REV 02	710-001593	S/N AA9563	
PEM 0	Rev 01	740-001243	S/N KJ35769	DC
PEM 1	Rev 01	740-001243	S/N KJ35765	DC
PCG 0	REV 01	710-001568	S/N AA9794	
PCG 1	REV 01	710-001568	S/N AA9804	
Host 1			da000004f8d57001	teknor
MCS 1	REV 03	710-001226	S/N AA9777	
SFM 0 SPP	REV 04	710-001228	S/N AA2975	
SFM 0 SPR	REV 02	710-001224	S/N AA9838	Internet Processor I
SSRAM bank 0	REV 01	710-000077	S/N 306456	1 MB
SSRAM bank 1	REV 01	710-000077	S/N 306474	1 MB
SSRAM bank 2	REV 01	710-000077	S/N 306388	1 MB
SSRAM bank 3	REV 01	710-000077	S/N 306392	1 MB
SFM 1 SPP	REV 04	710-001228	S/N AA2860	
SFM 1 SPR	REV 01	710-001224	S/N AB0139	Internet Processor I
SSRAM bank 0	REV 01	710-000077	S/N 302917	1 MB
SSRAM bank 1	REV 01	710-000077	S/N 302662	1 MB
SSRAM bank 2	REV 01	710-000077	S/N 302593	1 MB
SSRAM bank 3	REV 01	710-000077	S/N 100160	1 MB
FPC 0	REV 03	710-001255	S/N AA9806	FPC Type 1
CPU	REV 02	710-001217	S/N AA9590	
SSRAM	REV 01	710-000077	S/N 302836	1 MB
SDRAM 0	REV 01	710-001196	S00141	32 MB
SDRAM 1	REV 01	710-001196	S0010;	32 MB
SSRAM	REV 01	710-000077	S/N 302633	1 MB
SDRAM 0	REV 01	710-001196	S00143	32 MB
SDRAM 1	REV 01	710-001196	S00115	32 MB
SSRAM	REV 01	710-000077	S/N 302952	1 MB
SDRAM 0	REV 01	710-001196	S00135	32 MB
SDRAM 1	REV 01	710-001196	S001=3	32 MB
SSRAM	REV 01	710-000077	S/N 302892	1 MB
SDRAM 0	REV 01	710-001196	S000?6	32 MB
SDRAM 1	REV 01	710-001196	S001=5	32 MB



PIC 1	REV 05	750-000616	S/N AA1527	1x OC-12 ATM, MM
PIC 2	REV 05	750-000616	S/N AA1535	1x OC-12 ATM, MM
PIC 3	REV 01	750-000616	S/N AA1519	1x OC-12 ATM, MM
FPC 1	REV 02	710-001611	S/N AA9523	FPC Type 2
CPU	REV 02	710-001217	S/N AA9571	
SSRAM	REV 01	710-000077	S/N 306340	1 MB
SDRAM 0	REV 01	710-001196	S00012	32 MB
SDRAM 1	REV 01	710-001196	S0001?	32 MB
SSRAM	REV 01	710-000077	S/N 306454	1 MB
SDRAM 0	REV 01	710-001196	S00028	32 MB
SDRAM 1	REV 01	710-001196	S0002?	32 MB
SSRAM	REV 01	710-000077	S/N 306492	1 MB
SDRAM 0	REV 01	710-001196	S00015	32 MB
SDRAM 1	REV 01	710-001196	S00031	32 MB
SSRAM	REV 01	710-000077	S/N 306363	1 MB
SDRAM 0	REV 01	710-001196	S00013	32 MB
SDRAM 1	REV 01	710-001196	S00032	32 MB
PIC 0	REV 03	750-001900	S/N AA9626	1x STM-16 SDH, SMIR
PIC 1	REV 01	710-002381	S/N AD3633	2x G/E, 1000 BASE-SX
FPC 2				FPC Type OC192
... SSRAM	REV 01	710-000077	S/N 306466	1 MB

#### show chassis hardware (M320 Router)

```
user@host> show chassis hardware
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis			67245	M320
Midplane	REV 05	710-009120	RB1202	M320 Midplane
FPM GBUS	REV 04	710-005928	HZ5697	M320 Board
FPM Display	REV 05	710-009351	HR1464	M320 FPM Display
CIP	REV 04	710-005926	HT8672	M320 CIP
PEM 0	Rev 05	740-009148	QK34208	DC Power Entry Module
PEM 1	Rev 05	740-009148	QK34262	DC Power Entry Module
PEM 2	Rev 05	740-009148	QF10449	DC Power Entry Module
PEM 3	Rev 05	740-009148	QJ18257	DC Power Entry Module
Routing Engine 0	REV 06	740-008883	P11123901185	RE-4.0
CB 0	REV 07	710-009115	JB2382	M320 Control Board
FPC 0	REV 02	710-005017	CD9926	M320 FPC Type 2
CPU	REV 01	710-011659	CJ6940	M320 PCA SCPU
PIC 0	REV 07	750-001900	AT1594	1x OC-48 SONET, SMSR
PIC 1	REV 03	750-001850	HS2746	1x Tunnel
PIC 2	REV 05	750-010618	JE7117	4x G/E SFP, 1000 BASE
PIC 3	REV 06	750-001900	HE6083	1x OC-48 SONET, SMSR
FPC 2	REV 02	710-005017	CH0319	M320 FPC Type 1
CPU	REV 01	710-011659	CJ6942	M320 PCA SCPU
PIC 0	REV 05	750-003034	BD8705	4x OC-3 SONET, SMIR
FPC 5	REV 02	710-005017	CD9938	M320 FPC Type 2
CPU				
FPC 7	REV 02	710-005017	CD9934	M320 FPC Type 2
CPU				
SIB 0	REV 09	710-009184	JA6540	M320 SIB
SIB 1	REV 09	710-009184	HV9511	M320 SIB
SIB 2	REV 09	710-009184	HW2057	M320 SIB
SIB 3	REV 09	710-009184	JA6687	M320 SIB
Fan Tray 0				Front Top Fan Tray
Fan Tray 1				Front Bottom Fan Tray
Fan Tray 2				Rear Fan Tray

#### show chassis hardware models (M320 Router)

```
user@host> show chassis hardware models
```

```
Hardware inventory:
```

Item	Version	Part number	CLEI code	FRU model number
------	---------	-------------	-----------	------------------



Midplane	REV 03	710-009120	CHAS-BP-M320-S
FPM Display	REV 02	710-009351	CRAFT-M320-S
CIP	REV 03	710-005926	CIP-M320-S
PEM 2	Rev X4	740-009148	PWR-M-DC-S
PEM 3	Rev X4	740-009148	PWR-M-DC-S
Routing Engine 0	REV 02	740-008883	RE-1600-2048-S
Routing Engine 1	REV 02	740-008883	RE-1600-2048-S
FPC 0	REV 02	710-010419	M320-FPC1
PIC 0	REV 01	750-001323	P-TUNNEL
PIC 1	REV 02	750-002987	PE-10C12-SON-SMIR
PIC 2	REV 04	750-001894	PB-1GE-SX
PIC 3	REV 04	750-001896	PB-10C12-SON-SMIR
FPC 1	REV 02	710-010419	M320-FPC1
PIC 0	REV 04	750-001894	PB-1GE-SX
PIC 1	REV 04	750-001894	PB-1GE-SX
PIC 3	REV 03	750-001894	PB-1GE-SX
FPC 2	REV 02	710-010419	M320-FPC1
PIC 0	REV 10	750-005634	PB-1CHOC12SMIR-QPP
PIC 1	REV 10	750-005634	PB-1CHOC12SMIR-QPP
PIC 2	REV 07	750-005634	PB-1CHOC12SMIR-QPP
PIC 3	REV 07	750-005634	PB-1CHOC12SMIR-QPP
PIC 1	REV 10	750-005634	PB-1CHOC12SMIR-QPP
PIC 2	REV 07	750-005634	PB-1CHOC12SMIR-QPP
PIC 3	REV 07	750-005634	PB-1CHOC12SMIR-QPP
FPC 3			
PIC 0	REV 03	750-001895	PB-10C12-SON-MM
PIC 1	REV 04	750-001894	PB-1GE-SX
PIC 3	REV 04	750-003141	PB-1GE-SX-B
FPC 4	REV 02	710-010419	M320-FPC1
FPC 5	REV 02	710-010419	M320-FPC1
FPC 6	REV 02	710-010419	M320-FPC1
FPC 7			
PIC 0	REV 15	750-001901	PB-40C12-SON-SMIR
PIC 1	REV 06	750-001900	PB-10C48-SON-SMSR
PIC 2	REV 07	750-001900	PB-10C48-SON-SMSR
PIC 3	REV 05	750-003737	PB-4GE-SX
SIB 0	REV 03	710-009184	SIB-M-S
SIB 1	REV 03	710-009184	SIB-M-S
SIB 2	REV 03	710-009184	SIB-M-S
SIB 3	REV 03	710-009184	SIB-M-S
Fan Tray 0			FFANTRAY-M320-S
Fan Tray 1			FFANTRAY-M320-S
Fan Tray 2			RFANTRAY-M320-S

### show chassis hardware (MX5 Router)

user@host> show chassis hardware

Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			E1368	MX5-T
Midplane	REV 01	711-038215	YF5288	MX5-T
PEM 0	Rev 04	740-028288	VA01215	AC Power Entry Module
PEM 1	Rev 04	740-028288	VA01218	AC Power Entry Module
Routing Engine		BUILTIN	BUILTIN	Routing Engine
TFEB 0		BUILTIN	BUILTIN	Forwarding Engine
Processor				
QXM 0	REV 05	711-028408	ZA9136	MPC QXM
FPC 0		BUILTIN	BUILTIN	MPC BUILTIN
MIC 0		BUILTIN	BUILTIN	4x 10GE XFP
PIC 0		BUILTIN	BUILTIN	4x 10GE XFP
FPC 1		BUILTIN	BUILTIN	MPC BUILTIN
MIC 0	REV 24	750-028392	YX9820	3D 20x 1GE(LAN) SFP
PIC 0		BUILTIN	BUILTIN	10x 1GE(LAN) SFP



Xcvr 0	REV 01	740-031851	AM1045SUAQ3	SFP-SX
Xcvr 1	REV 01	740-031851	AM1045SUAPA	SFP-SX
Xcvr 2	REV 01	740-031851	AM1045SUAN7	SFP-SX
Xcvr 3	REV 01	740-031851	AM1045SU91Q	SFP-SX
Xcvr 4	REV 01	740-031851	AM1045SUDDR	SFP-SX
Xcvr 9	REV 01	740-011613	AM0848SB6A1	SFP-SX
PIC 1		BUILTIN	BUILTIN	10x 1GE(LAN) SFP
Xcvr 0	REV 01	740-031851	AM1045SUANO	SFP-SX
Xcvr 1	REV 01	740-011613	AS0812S0719	SFP-SX
Xcvr 2	REV 01	740-011613	AM0821SA121	SFP-SX
Xcvr 3	REV 01	740-011613	PF21K21	SFP-SX
Xcvr 4	REV 01	740-011613	AM0848SB69Z	SFP-SX
Xcvr 5	REV 01	740-011782	P9POXV3	SFP-SX
Xcvr 6	REV 01	740-011613	AM0812S8WJN	SFP-SX
Xcvr 7	REV 01	740-011613	PAM3G9Q	SFP-SX
Xcvr 8	REV 01	740-011613	AM0848SB4A6	SFP-SX
Xcvr 9	REV 01	740-011782	P9M0U37	SFP-SX
MIC 1	REV 20	750-028380	ZG2657	3D 2x 10GE XFP
PIC 2		BUILTIN	BUILTIN	1x 10GE XFP
PIC 3		BUILTIN	BUILTIN	1x 10GE XFP
Fan Tray				Fan Tray

#### show chassis hardware (MX10 Router)

```
user@host> show chassis hardware
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis			E1372	MX10-T
Midplane	REV 01	711-038211	YF5285	MX10-T
PEM 0	Rev 04	740-028288	VB01678	AC Power Entry Module
Routing Engine		BUILTIN	BUILTIN	Routing Engine
TFEB 0		BUILTIN	BUILTIN	Forwarding Engine
Processor				
QXM 0	REV 05	711-028408	ZA9053	MPC QXM
FPC 0		BUILTIN	BUILTIN	MPC BUILTIN
MIC 0		BUILTIN	BUILTIN	4x 10GE XFP
PIC 0		BUILTIN	BUILTIN	4x 10GE XFP
FPC 1		BUILTIN	BUILTIN	MPC BUILTIN
MIC 0	REV 24	750-028392	YX9436	3D 20x 1GE(LAN) SFP
PIC 0		BUILTIN	BUILTIN	10x 1GE(LAN) SFP
Xcvr 0	REV 01	740-031851	AM1107SUFQW	SFP-SX
PIC 1		BUILTIN	BUILTIN	10x 1GE(LAN) SFP
Fan Tray				Fan Tray

#### show chassis hardware (MX40 Router)

```
user@host> show chassis hardware
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis			E1367	MX40-T
Midplane	REV 01	711-038211	YF5284	MX40-T
PEM 0	Rev 04	740-028288	VB01680	AC Power Entry Module
PEM 1	Rev 04	740-028288	VB01700	AC Power Entry Module
Routing Engine		BUILTIN	BUILTIN	Routing Engine
TFEB 0		BUILTIN	BUILTIN	Forwarding Engine
Processor				
QXM 0	REV 05	711-028408	ZA9048	MPC QXM
FPC 0		BUILTIN	BUILTIN	MPC BUILTIN
MIC 0		BUILTIN	BUILTIN	4x 10GE XFP
PIC 0		BUILTIN	BUILTIN	4x 10GE XFP
Xcvr 0	REV 01	740-014279	M7067UPP	XFP-10G-LR
Xcvr 1		NON-JNPR	K9J02UN	XFP-10G-LR
FPC 1		BUILTIN	BUILTIN	MPC BUILTIN
MIC 0	REV 24	750-028392	YX3504	3D 20x 1GE(LAN) SFP



PIC 0		BUILTIN	BUILTIN	10x 1GE(LAN) SFP
Xcvr 0	REV 01	740-011613	AM0812S8WTE	SFP-SX
Xcvr 1	REV 01	740-011613	PFA6KV2	SFP-SX
Xcvr 2	REV 01	740-031851	AM1045SUDDM	SFP-SX
Xcvr 3	REV 01	740-011613	PD63C7M	SFP-SX
Xcvr 4	REV 01	740-011613	PD63DJY	SFP-SX
Xcvr 5	REV 02	740-011613	AA0950STLL9	SFP-SX
Xcvr 6	REV 01	740-011782	PAR1YHC	SFP-SX
Xcvr 7	REV 01	740-011782	P9P0XXL	SFP-SX
Xcvr 8	REV 01	740-011613	PD63D95	SFP-SX
Xcvr 9	REV 01	740-031851	AM1045SU9B8	SFP-SX
PIC 1		BUILTIN	BUILTIN	10x 1GE(LAN) SFP
Xcvr 0	REV 01	740-011613	PF21L3Z	SFP-SX
Xcvr 1	REV 01	740-031851	AM1045SU7M9	SFP-SX
Xcvr 2	REV 01	740-031851	AM1045SUAPT	SFP-SX
Xcvr 3	REV 01	740-011613	PFF2BZH	SFP-SX
Xcvr 4	REV 01	740-031851	AM1045SUDDN	SFP-SX
Xcvr 5	REV 01	740-031851	AM1039S00ZR	SFP-SX
Xcvr 6	REV 01	740-031851	AM1045SUD6Y	SFP-SX
Xcvr 8	REV 01	740-011613	PFM1QBS	SFP-SX
Xcvr 9	REV 01	740-011613	PFF2E25	SFP-SX
MIC 1	REV 01	750-021130	KG4391	3D 2x 10GE XFP
PIC 2		BUILTIN	BUILTIN	1x 10GE XFP
Xcvr 0	REV 01	740-011571	C645XJ04G	XFP-10G-SR
PIC 3		BUILTIN	BUILTIN	1x 10GE XFP
Xcvr 0		NON-JNPR	CA49BK0AE	XFP-10G-SR
Fan Tray				Fan Tray

#### show chassis hardware (Fixed MX80 Router)

```
user@host> show chassis hardware
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis				MX80-48T
Midplane	REV 01	711-031603	KF9250	MX80-48T
Routing Engine		BUILTIN	BUILTIN	Routing Engine
FEB 0		BUILTIN	BUILTIN	Forwarding Engine Board
FPC 0		BUILTIN	BUILTIN	MPC BUILTIN
MIC 0		BUILTIN	BUILTIN	4x 10GE XFP
PIC 0		BUILTIN	BUILTIN	4x 10GE XFP
Xcvr 0		NON-JNPR	M6439D41	XFP-10G-LR
Xcvr 1	REV 01	740-014279	6XE931N00202	XFP-10G-LR
Xcvr 2	REV 01	740-014289	C715XU05F	XFP-10G-SR
Xcvr 3	REV 01	740-014289	C650XU0EP	XFP-10G-SR
FPC 1		BUILTIN	BUILTIN	MPC BUILTIN
MIC 0	REV 01	711-029399	JR6981	12x 1GE(LAN) RJ45
PIC 0		BUILTIN	BUILTIN	12x 1GE(LAN) RJ45
PIC 1		BUILTIN	BUILTIN	12x 1GE(LAN) RJ45
MIC 1	REV 01	BUILTIN	BUILTIN	12x 1GE(LAN) RJ45
PIC 2		BUILTIN	BUILTIN	12x 1GE(LAN) RJ45
PIC 3		BUILTIN	BUILTIN	12x 1GE(LAN) RJ45
Fan Tray				Fan Tray

#### show chassis hardware (Modular MX80 Router)

```
user@host> show chassis hardware
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis				MX80
Midplane	REV 02	711-031594	JR7084	MX80
PEM 0	Rev 01	740-028288	000018	AC Power Entry Module
Routing Engine		BUILTIN	BUILTIN	Routing Engine
FEB 0		BUILTIN	BUILTIN	Forwarding Engine Board



QXM 0	REV 05	711-028408	JR7041	MPC QXM
FPC 0		BUILTIN	BUILTIN	MPC BUILTIN
MIC 0		BUILTIN	BUILTIN	4x 10GE XFP
PIC 0		BUILTIN	BUILTIN	4x 10GE XFP
FPC 1		BUILTIN	BUILTIN	MPC BUILTIN
MIC 0	REV 02	750-028380	JR6598	3D 2x 10GE XFP
PIC 0		BUILTIN	BUILTIN	1x 10GE XFP
Xcvr 0	REV 01	740-014289	T07M86365	XFP-10G-SR
PIC 1		BUILTIN	BUILTIN	1x 10GE XFP
Xcvr 0	REV 01	740-014289	T07M71094	XFP-10G-SR
MIC 1	REV 02	750-028380	JG8548	3D 2x 10GE XFP
PIC 2		BUILTIN	BUILTIN	1x 10GE XFP
Xcvr 0	REV 02	740-014289	T08L86302	XFP-10G-SR
PIC 3		BUILTIN	BUILTIN	1x 10GE XFP
Xcvr 0	REV 02	740-014289	C810XU0BA	XFP-10G-SR
Fan Tray				Fan Tray

### show chassis hardware (MX240 Router)

```
user@host> show chassis hardware
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis			JN10C7F7EAFC	MX240
Midplane	REV 01	710-021041	TR1502	MX240 Backplane
FPM Board	REV 01	710-017254	KD4017	Front Panel Display
PEM 0	Rev 02	740-017330	000332	PS 1.2-1.7kW; 100-240V
AC in				
PEM 1	Rev 02	740-017330	000226	PS 1.2-1.7kW; 100-240V
AC in				
Routing Engine 0	REV 06	740-013063	1000703522	RE-S-2000
Routing Engine 1	REV 06	740-015113	1000687625	RE-S-1300
CB 0	REV 07	710-013385	KC9057	MX SCB
CB 1	REV 05	710-013385	JY4760	MX SCB
FPC 1	REV 01	750-021679	KC7340	DPCE 40x 1GE R
CPU	REV 06	710-013713	KD4078	DPC PMB
PIC 0		BUILTIN	BUILTIN	10x 1GE(LAN)
Xcvr 0	REV 01	740-011613	P9F18ME	SFP-SX
PIC 1		BUILTIN	BUILTIN	10x 1GE(LAN)
PIC 2		BUILTIN	BUILTIN	10x 1GE(LAN)
PIC 3		BUILTIN	BUILTIN	10x 1GE(LAN)
FPC 2	REV 04	710-016669	JS4529	DPCE 40x 1GE R EQ
CPU	REV 06	710-013713	KB3969	DPC PMB
PIC 0		BUILTIN	BUILTIN	10x 1GE(LAN) EQ
Xcvr 0	REV 01	740-011613	PBG3Y79	SFP-SX
Xcvr 1	REV 01	740-011613	PBG3XU8	SFP-SX
Xcvr 2	REV 01	740-011613	PBG3YG6	SFP-SX
Xcvr 3	REV 01	740-011613	PBG3XUG	SFP-SX
Xcvr 4	REV 01	740-011613	PBG3XTJ	SFP-SX
PIC 1		BUILTIN	BUILTIN	10x 1GE(LAN) EQ
Xcvr 0	REV 01	740-011613	PBG3ZUM	SFP-SX
Xcvr 1	REV 01	740-011613	PBG3Y5H	SFP-SX
Xcvr 2	REV 01	740-011613	PBG3UZT	SFP-SX
Xcvr 3	REV 01	740-011613	PBG3US1	SFP-SX
PIC 2		BUILTIN	BUILTIN	10x 1GE(LAN) EQ
Xcvr 0	REV 01	740-011613	PBG3YG7	SFP-SX
Xcvr 1	REV 01	740-011613	PBG3XZ9	SFP-SX
Xcvr 2	REV 01	740-011613	PBG3XTY	SFP-SX
Xcvr 3	REV 01	740-011613	PBG3UZG	SFP-SX
PIC 3		BUILTIN	BUILTIN	10x 1GE(LAN) EQ
Xcvr 0	REV 01	740-011613	PBG3Y8W	SFP-SX
Xcvr 1	REV 01	740-011613	PBG3YVX	SFP-SX
Xcvr 2	REV 01	740-011613	PBG3YB3	SFP-SX



Xcvr 3	REV 01	740-011613	PBG43VQ	SFP-SX
Fan Tray 0	REV 01	710-021113	JS4642	MX240 Fan Tray

show chassis hardware  
detail (MX 240 Router  
with Routing Engine

user@host> show chassis hardware detail

Item	Version	Part number	Serial number	Description
Chassis			JN11279B4AFC	MX240 Backplane



### Displaying DIMM information)

```

Midplane          REV 07   760-021404   TS2474           MX240 Backplane
FPM Board         REV 03   760-021392   XC2643           Front Panel Display
PEM 0             Rev 03   740-017343   QCS0908A068     DC Power Entry Module
Routing Engine 0  REV 01   740-031117   AARCH00         RE-S-1800x4
  ad0      3764 MB  STEC M2+ CF 9.0.2  STIM2Q3209239145303 Removable Compact Flash

  ad1      28626 MB WDC SSD-F0030S-5000 C933Z036237215548S00 Compact Flash
usb0 (addr 1)     EHCI root hub 0      Intel           uhub0
usb0 (addr 2)     product 0x0020 32      vendor 0x8087   uhub1
DIMM 0            VL31B5263E-F8S DIE REV-0 PCB REV-0   MFR ID-ce80
DIMM 1            VL31B5263E-F8S DIE REV-0 PCB REV-0   MFR ID-ce80
DIMM 2            VL31B5263E-F8S DIE REV-0 PCB REV-0   MFR ID-ce80
DIMM 3            SL31B5263E-F8S DIE REV-0 PCB REV-0   MFR ID-ce80
CB 0              REV 03   710-021523   XD7225           MX SCB
Fan Tray 0        REV 01   710-021113   WZ4986           MX240 Fan Tray

```

### show chassis hardware (MX240 Router with Enhanced MX SCB)

```

user@host> show chassis hardware
Hardware inventory:
Item          Version  Part number  Serial number  Description
Chassis                               JN10C7F7EAFC  MX240
Midplane      REV 01   710-021041   TR1502         MX240 Backplane
FPM Board     REV 01   710-017254   KD4017         Front Panel Display
PEM 0         Rev 02   740-017330   000332         PS 1.2-1.7kW; 100-240V
AC in
PEM 1         Rev 02   740-017330   000226         PS 1.2-1.7kW; 100-240V
AC in
Routing Engine 0 REV 06   740-013063   1000703522     RE-S-2000
Routing Engine 1 REV 06   740-015113   1000687625     RE-S-1300
CB 0          REV 02   710-031391   YE8494         Enhanced MX SCB
CB 1          REV 05   710-031391   YOP5764        Enhanced MX SCB
FPC 1         REV 01   750-021679   KC7340         DPCE 40x 1GE R
CPU           REV 06   710-013713   KD4078         DPC PMB
  PIC 0                BUILTIN      BUILTIN        10x 1GE(LAN)
    Xcvr 0             REV 01   740-011613   P9F18ME        SFP-SX
  PIC 1                BUILTIN      BUILTIN        10x 1GE(LAN)
  PIC 2                BUILTIN      BUILTIN        10x 1GE(LAN)
  PIC 3                BUILTIN      BUILTIN        10x 1GE(LAN)
FPC 2         REV 04   710-016669   JS4529         DPCE 40x 1GE R EQ
CPU           REV 06   710-013713   KB3969         DPC PMB
  PIC 0                BUILTIN      BUILTIN        10x 1GE(LAN) EQ
    Xcvr 0             REV 01   740-011613   PBG3Y79        SFP-SX
    Xcvr 1             REV 01   740-011613   PBG3XU8        SFP-SX
    Xcvr 2             REV 01   740-011613   PBG3YG6        SFP-SX
    Xcvr 3             REV 01   740-011613   PBG3XUG        SFP-SX
    Xcvr 4             REV 01   740-011613   PBG3XTJ        SFP-SX
  PIC 1                BUILTIN      BUILTIN        10x 1GE(LAN) EQ
    Xcvr 0             REV 01   740-011613   PBG3ZUM        SFP-SX
    Xcvr 1             REV 01   740-011613   PBG3Y5H        SFP-SX
    Xcvr 2             REV 01   740-011613   PBG3UZT        SFP-SX
    Xcvr 3             REV 01   740-011613   PBG3US1        SFP-SX
  PIC 2                BUILTIN      BUILTIN        10x 1GE(LAN) EQ
    Xcvr 0             REV 01   740-011613   PBG3YG7        SFP-SX
    Xcvr 1             REV 01   740-011613   PBG3XZ9        SFP-SX
    Xcvr 2             REV 01   740-011613   PBG3XTY        SFP-SX
    Xcvr 3             REV 01   740-011613   PBG3UZG        SFP-SX
  PIC 3                BUILTIN      BUILTIN        10x 1GE(LAN) EQ
    Xcvr 0             REV 01   740-011613   PBG3Y8W        SFP-SX
    Xcvr 1             REV 01   740-011613   PBG3YVX        SFP-SX
    Xcvr 2             REV 01   740-011613   PBG3YB3        SFP-SX
    Xcvr 3             REV 01   740-011613   PBG43VQ        SFP-SX
Fan Tray 0        REV 01   710-021113   JS4642         MX240 Fan Tray

```



**show chassis hardware  
(MX480 Router)**

user@host&gt; show chassis hardware

Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			JN10C7F7FAFB	MX480
Midplane	REV 04	710-017414	TR2071	MX480 Midplane
FPM Board	REV 02	710-017254	KB8459	Front Panel Display
PEM 0	Rev 02	740-017330	QCS07519029	PS 1.2-1.7kW; 100-240V
AC in				
PEM 1	Rev 02	740-017330	QCS07519041	PS 1.2-1.7kW; 100-240V
AC in				
PEM 2	Rev 02	740-017330	QCS07519097	PS 1.2-1.7kW; 100-240V
AC in				
Routing Engine 0	REV 07	740-013063	1000733381	RE-S-2000
Routing Engine 1	REV 07	740-013063	1000733540	RE-S-2000
CB 0	REV 07	710-013385	KA8022	MX SCB
CB 1	REV 07	710-013385	KA8303	MX SCB
FPC 0	REV 09	750-020452	KA8660	DPCE 40x 1GE X EQ
CPU	REV 06	710-013713	KA8185	DPC PMB
PIC 0		BUILTIN	BUILTIN	10x 1GE(LAN) EQ
PIC 1		BUILTIN	BUILTIN	10x 1GE(LAN) EQ
PIC 2		BUILTIN	BUILTIN	10x 1GE(LAN) EQ
PIC 3		BUILTIN	BUILTIN	10x 1GE(LAN) EQ
Fan Tray				Left Fan Tray

**show chassis hardware  
(MX480 Router with  
Enhanced MX SCB)**

user@host&gt; show chassis hardware

Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			JN10C7F7FAFB	MX480
Midplane	REV 04	710-017414	TR2071	MX480 Midplane
FPM Board	REV 02	710-017254	KB8459	Front Panel Display
PEM 0	Rev 02	740-017330	QCS07519029	PS 1.2-1.7kW; 100-240V
AC in				
PEM 1	Rev 02	740-017330	QCS07519041	PS 1.2-1.7kW; 100-240V
AC in				
PEM 2	Rev 02	740-017330	QCS07519097	PS 1.2-1.7kW; 100-240V
AC in				
Routing Engine 0	REV 07	740-013063	1000733381	RE-S-2000
Routing Engine 1	REV 07	740-013063	1000733540	RE-S-2000
CB 0	REV 07	710-013385	KA8022	Enhanced MX SCB
CB 1	REV 07	710-013385	KA8303	Enhanced MX SCB
FPC 0	REV 09	750-020452	KA8660	DPCE 40x 1GE X EQ
CPU	REV 06	710-013713	KA8185	DPC PMB
PIC 0		BUILTIN	BUILTIN	10x 1GE(LAN) EQ
PIC 1		BUILTIN	BUILTIN	10x 1GE(LAN) EQ
PIC 2		BUILTIN	BUILTIN	10x 1GE(LAN) EQ
PIC 3		BUILTIN	BUILTIN	10x 1GE(LAN) EQ
Fan Tray				Left Fan Tray

**show chassis hardware  
(MX960 Router)**

user@host&gt; show chassis hardware

Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis				MX960
Midplane	REV 01	710-013698	AA6082	MX960 Midplane
PIM	Rev 01	740-013110	000008	Power Inlet Module
PEM 2				
PEM 3	Rev 01	740-013682	000038	PS 1.7kW; 200-240VAC in
Routing Engine 0	REV 00	740-015113	1000617944	RE-S-1300
CB 0	REV 05	710-013725	JK6947	MX960 Test SCB



```

FPC 4          REV 01  710-013305  JM7617          MX960 Test DPC
CPU
PIC 0          BUILTIN  BUILTIN          1x 10GE(LAN/WAN)
PIC 1          BUILTIN  BUILTIN          10x 1GE
FPC 7          REV 01  710-013305  JL9634          MX960 Test DPC
CPU
PIC 0          BUILTIN  BUILTIN          1x 10GE(LAN/WAN)
Xcvr 0         NON-JNPR  MYBG65I82C      XFP-10G-SR
PIC 1          BUILTIN  BUILTIN          10x 1GE
Xcvr 1         REV 01  740-011782  P7N0368        SFP-SX
Xcvr 4         REV 01  740-011782  P8J1W27        SFP-SX
Xcvr 6         REV 01  740-011782  P8J1VSD        SFP-SX
Xcvr 9         REV 01  740-011782  P8J1W25        SFP-SX
Fan Tray 0
Fan Tray 1

```

### show chassis hardware (MX960 Router with Bidirectional Optics)

```
user@host> show chassis hardware
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis			JN10BA5B9AFA	MX960
Midplane	REV 03	710-013698	TR0234	MX960 Backplane
FPM Board	REV 03	710-014974	JA0878	Front Panel Display
PDM	Rev 03	740-013110	QCS11135028	Power Distribution Module
PEM 0	Rev 03	740-013682	QCS11154036	PS 1.7kW; 200-240VAC in
PEM 1	Rev 03	740-013682	QCS11154010	PS 1.7kW; 200-240VAC in
PEM 2	Rev 03	740-013682	QCS11154022	PS 1.7kW; 200-240VAC in
Routing Engine 0	REV 06	740-013063	1000691458	RE-S-2000
CB 0	REV 07	710-013385	KA2190	MX SCB
CB 1	REV 07	710-013385	KA0837	MX SCB
FPC 3	REV 02	750-018122	KB3890	DPCE 40x 1GE R
CPU				
FPC 4	REV 01	750-018122	KB3889	DPCE 40x 1GE R
CPU	REV 06	710-013713	KB3976	DPC PMB
PIC 0		BUILTIN	BUILTIN	10x 1GE(LAN)
Xcvr 1	REV 01	740-020426	4910549	SFP-1000BASE-BX40-D
Xcvr 2	REV 01	740-020426	4910551	SFP-1000BASE-BX40-D
Xcvr 5	REV 01	740-021340	77E245N00006	SFP-1000BASE-BX10-U
Xcvr 6	REV 01	740-020425	4882821	SFP-1000BASE-BX40-U
Xcvr 8	REV 01	740-020425	4882820	SFP-1000BASE-BX40-U
PIC 1		BUILTIN	BUILTIN	10x 1GE(LAN)
Xcvr 0	REV 01	740-020465	77E555N00894	SFP-1000BASE-BX10-D
Xcvr 1	REV 01	740-020465	75E467X00818	SFP-1000BASE-BX10-D
Xcvr 2	REV 01	740-020465	75E467X00573	SFP-1000BASE-BX10-D
Xcvr 3	REV 01	740-020465	4888227	SFP-1000BASE-BX10-D
Xcvr 4	REV 01	740-020465	4888241	SFP-1000BASE-BX10-D
Xcvr 5	REV 01	740-021340	77E245N00005	SFP-1000BASE-BX10-U
Xcvr 6	REV 01	740-021340	76E245X00487	SFP-1000BASE-BX10-U
Xcvr 7	REV 01	740-021341	5255889	SFP-1000BASE-BX10-U
Xcvr 8	REV 01	740-021341	5255887	SFP-1000BASE-BX10-U
Xcvr 9	REV 01	740-021340	77E245N00004	SFP-1000BASE-BX10-U
PIC 2		BUILTIN	BUILTIN	10x 1GE(LAN)
Xcvr 0	REV 01	740-020424	5007582	SFP-1000BASE-BX10-D
Xcvr 1	REV 01	740-020424	4888187	SFP-1000BASE-BX10-D
Xcvr 2	REV 01	740-020424	4656500	SFP-1000BASE-BX10-D
Xcvr 5	REV 01	740-021341	5255886	SFP-1000BASE-BX10-U
Xcvr 7	REV 01	740-021340	77E245N00003	SFP-1000BASE-BX10-U
Xcvr 8	REV 01	740-021341	5255888	SFP-1000BASE-BX10-U
PIC 3		BUILTIN	BUILTIN	10x 1GE(LAN)
Xcvr 0	REV 01	740-017726	74S184H30341	SFP-EX
Xcvr 1	REV 01	740-017726	4814061	SFP-EX
Xcvr 5	REV 01	740-017726	6ZS184H31108	SFP-EX



Xcvr 9	REV 01	740-021340	76E245X00486	SFP-1000BASE-BX10-U
Fan Tray 0				
Fan Tray 1	REV 03	740-014971	TP0850	Fan Tray

### show chassis hardware (MX960 Router with Enhanced MX SCB)

```
user@host> show chassis hardware
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis			JN1096805AFA	MX960
Midplane	REV 03	710-013698	TR0183	MX960 Backplane
Fan Extender	REV 02	710-018051	JY5227	Extended Cable Manager
FPM Board	REV 03	710-014974	JZ6876	Front Panel Display
PDM	Rev 03	740-013110	QCS11035023	Power Distribution Module
PEM 1	Rev 03	740-013682	QCS1109400L	PS 1.7kW; 200-240VAC in
PEM 2	Rev 03	740-013682	QCS11094015	PS 1.7kW; 200-240VAC in
PEM 3	Rev 03	740-013682	QCS11094012	PS 1.7kW; 200-240VAC in
Routing Engine 0	REV 06	740-013063	1000687969	RE-S-2000
Routing Engine 1	REV 06	740-013063	1000687955	RE-S-2000
CB 0	REV 11	750-031391	YZ6072	Enhanced MX SCB
CB 1	REV 11	750-031391	YZ6068	Enhanced MX SCB
CB 2	REV 11	750-031391	YZ6081	Enhanced MX SCB
FPC 0	REV 01	750-018122	KA5576	DPCE 40x 1GE R
CPU	REV 06	710-013713	KB3961	DPC PMB
PIC 0		BUILTIN	BUILTIN	10x 1GE(LAN)
Xcvr 0	REV 01	740-011613	P9F18GF	SFP-SX
Xcvr 2	REV 01	740-011782	P9MOTL9	SFP-SX
Xcvr 7	REV 01	740-011782	P9P0XXH	SFP-SX
Xcvr 9	REV 01	740-011782	P9MOTN1	SFP-SX
PIC 1		BUILTIN	BUILTIN	10x 1GE(LAN)
Xcvr 0	REV 01	740-011613	PAJ4UHC	SFP-SX
PIC 2		BUILTIN	BUILTIN	10x 1GE(LAN)
Xcvr 0	REV 01	740-011613	PFF2CD0	SFP-SX
Xcvr 1	REV 01	740-011613	PBG3ZUT	SFP-SX
Xcvr 2	REV 01	740-011613	PFF2DDV	SFP-SX
Xcvr 5	REV 01	740-011613	P8E2SST	SFP-SX
Xcvr 9	REV 01	740-011782	PB8329N	SFP-SX
PIC 3		BUILTIN	BUILTIN	10x 1GE(LAN)
Xcvr 0	REV 01	740-026192	1U0201084503342	SFP-100BASE-BX10-U
Xcvr 1	REV 01	740-026193	1U1201084503313	SFP-100BASE-BX10-U
Xcvr 2	REV 01	740-011613	PAJ4Y5B	SFP-SX
Xcvr 6	REV 01	740-011782	P9MOU3M	SFP-SX
Xcvr 7	REV 01	740-011782	P9MOTLA	SFP-SX
FPC 1	REV 16	750-031089	YL0719	MPC Type 2 3D
CPU	REV 06	711-030884	YL1463	MPC PMB 2G
MIC 0	REV 07	750-028387	JR6500	3D 4x 10GE XFP
PIC 0		BUILTIN	BUILTIN	2x 10GE XFP
Xcvr 0	REV 01	740-014279	733019A00154	XFP-10G-LR
Xcvr 1	REV 02	740-014289	T09F55034	XFP-10G-SR
PIC 1		BUILTIN	BUILTIN	2x 10GE XFP
Xcvr 0	REV 01	740-014279	913019B00791	XFP-10G-LR
Xcvr 1	REV 01	740-014289	98S803A90384	XFP-10G-SR
MIC 1	REV 24	750-028387	YJ3950	3D 4x 10GE XFP
PIC 2		BUILTIN	BUILTIN	2x 10GE XFP
Xcvr 0	REV 02	740-014279	T10B36134	XFP-10G-LR
Xcvr 1	REV 01	740-014289	T07M86354	XFP-10G-SR
PIC 3		BUILTIN	BUILTIN	2x 10GE XFP
FPC 2	REV 08	710-014219	JY9654	DPCE 4x 10GE R
CPU	REV 06	710-013713	JZ6549	DPC PMB
PIC 0		BUILTIN	BUILTIN	1x 10GE(LAN/WAN)
PIC 1		BUILTIN	BUILTIN	1x 10GE(LAN/WAN)
PIC 2		BUILTIN	BUILTIN	1x 10GE(LAN/WAN)
Xcvr 0	REV 03	740-011571	C931BK028	XFP-10G-SR



PIC 3		BUILTIN	BUILTIN	1x 10GE(LAN/WAN)
FPC 3	REV 10	750-024199	XJ6692	MX FPC Type 3
CPU	REV 03	710-022351	XF5182	DPC PMB
PIC 0	REV 17	750-009553	RJ2945	4x OC-48 SONET
Xcvr 1	REV 01	740-011785	PCP3YLL	SFP-SR
Xcvr 3	REV 01	740-011785	PDSOMRY	SFP-SR
PIC 1	REV 32	750-003700	DP2113	1x OC-192 12xMM VSR
FPC 5	REV 25	750-028467	YM8256	MPC 3D 16x 10GE
CPU	REV 10	711-029089	YL3029	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 1	REV 01	740-031980	AHNOX1Z	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
FPC 7	REV 02	750-031092	JR6658	MPC Type 1 3D Q
CPU	REV 01	711-030884	JZ9038	MPC PMB 2G
MIC 0	REV 08	750-028392	JZ8737	3D 20x 1GE(LAN) SFP
PIC 0		BUILTIN	BUILTIN	10x 1GE(LAN) SFP
Xcvr 0	REV 01	740-011782	PBE2C6Y	SFP-SX
Xcvr 2		NON-JNPR	U8105N8	SFP-SX
Xcvr 4	REV 01	740-011613	PFM18EF	SFP-SX
Xcvr 7	REV 01	740-011613	PFF2AM8	SFP-SX
Xcvr 8	REV 01	740-011613	PFF2CT6	SFP-SX
PIC 1		BUILTIN	BUILTIN	10x 1GE(LAN) SFP
Xcvr 0	REV 01	740-011782	PB82VHH	SFP-SX
Xcvr 1	REV 01	740-011613	PFF2CSW	SFP-SX
Xcvr 9	REV 01	740-011613	PFF2BY0	SFP-SX
QXM 0	REV 04	711-028408	JR6372	MPC QXM
FPC 8	REV 05	750-024387	JW9754	MX FPC Type 2
CPU	REV 03	710-022351	KF1651	DPC PMB
PIC 0	REV 08	750-014730	DM3664	4x OC-3 1x OC-12 SFP
Xcvr 0	REV 01	740-016065	81S290N00077	SFP-SR
Xcvr 1		NON-JNPR	2191844	SFP-SR
Xcvr 2	REV 01	740-011618	PD81EE5	SFP-IR
PIC 1	REV 08	750-014637	DM3671	4x OC-12-3 SFP
Xcvr 0	REV 01	740-011785	PCK3UNK	SFP-SR
Xcvr 3	REV 01	740-011785	PDSOMPZ	SFP-SR
FPC 10	REV 04	710-013699	JY4654	DPCE 40x 1GE R
CPU	REV 05	710-013713	JS9717	DPC PMB
PIC 0		BUILTIN	BUILTIN	10x 1GE(LAN)
Xcvr 5	REV 01	740-011782	PAR1L72	SFP-SX
Xcvr 6	REV 01	740-011782	P8N1YQ4	SFP-SX
PIC 1		BUILTIN	BUILTIN	10x 1GE(LAN)
PIC 2		BUILTIN	BUILTIN	10x 1GE(LAN)
Xcvr 0	REV 01	740-011782	P8Q2AVL	SFP-SX
Xcvr 5	REV 01	740-011782	PAR1L7B	SFP-SX
Xcvr 6	REV 01	740-011782	PAR1L2J	SFP-SX
Xcvr 8	REV 01	740-011782	P8N1YMY	SFP-SX
PIC 3		BUILTIN	BUILTIN	10x 1GE(LAN)
Fan Tray 0	REV 03	740-014971	TP0567	Fan Tray
Fan Tray 1	REV 03	740-014971	TP0702	Fan Tray

show chassis hardware  
models (MX960)

user@host> show chassis hardware models

Hardware inventory:

Item	Version	Part number	Serial number	FRU model number
------	---------	-------------	---------------	------------------



Router with Enhanced  
MX SCB)

Midplane	REV 03	710-013698	TR0183	CHAS-BP-MX960-S
Fan Extender	REV 02	710-018051	JY5227	ECM-MX960
FPM Board	REV 03	710-014974	JZ6876	CRAFT-MX960-S
Routing Engine 0	REV 06	740-013063	1000687969	RE-S-2000-4096-S
Routing Engine 1	REV 06	740-013063	1000687955	RE-S-2000-4096-S
CB 0	REV 11	750-031391	YZ6072	SCBE-MX-S
CB 1	REV 11	750-031391	YZ6068	SCBE-MX-S
CB 2	REV 11	750-031391	YZ6081	SCBE-MX-S
FPC 0	REV 01	750-018122	KA5576	DPCE-R-40GE-SFP
FPC 1	REV 16	750-031089	YL0719	MX-MPC2-3D
MIC 0	REV 07	750-028387	JR6500	MIC-3D-4XGE-XFP
MIC 1	REV 24	750-028387	YJ3950	MIC-3D-4XGE-XFP
FPC 2	REV 08	710-014219	JY9654	DPC-R-4XGE-XFP
FPC 3	REV 10	750-024199	XJ6692	MX-FPC3
PIC 0	REV 17	750-009553	RJ2945	PC-40C48-SON-SFP
PIC 1	REV 32	750-003700	DP2113	PC-10C192-SON-VSR
FPC 5	REV 25	750-028467	YM8256	MPC-3D-16XGE-SFP
FPC 7	REV 02	750-031092	JR6658	MX-MPC1-3D-Q
MIC 0	REV 08	750-028392	JZ8737	MIC-3D-20GE-SFP
FPC 8	REV 05	750-024387	JW9754	MX-FPC2
PIC 0	REV 08	750-014730	DM3664	PB-40C3-10C12-SON2-SFP
PIC 1	REV 08	750-014637	DM3671	PB-40C3-40C12-SON-SFP
FPC 10	REV 04	710-013699	JY4654	DPC-R-40GE-SFP
Fan Tray 0	REV 03	740-014971	TP0567	FFANTRAY-MX960-S
Fan Tray 1	REV 03	740-014971	TP0702	FFANTRAY-MX960-S

show chassis hardware  
detail (MX960 Router)

```
user@host> show chassis hardware detail
```

Hardware inventory:				
Item	Version	Part number	Serial number	Description
Chassis				MX960
Midplane	REV 01	710-013698	AA6082	MX960 Midplane
PIM	Rev 01	740-013110	000008	Power Inlet Module
PEM 2				
PEM 3	Rev 01	740-013682	000038	PS 1.7kW; 200-240VAC in
Routing Engine 0	REV 00	740-015113	1000617944	RE-S-1300
ad0 245 MB	SanDisk	SDCFB-256	111419E1805T1141	Compact Flash
ad2 38154 MB	FUJITSU	MHT2040BH	NR0WT5925N77	Hard Disk
CB 0	REV 05	710-013725	JK6947	MX960 Test SCB
FPC 4	REV 01	710-013305	JM7617	MX960 Test DPC
CPU				
PIC 0		BUILTIN	BUILTIN	1x 10GE(LAN/WAN)
PIC 1		BUILTIN	BUILTIN	10x 1GE
FPC 7	REV 01	710-013305	JL9634	MX960 Test DPC
CPU				
PIC 0		BUILTIN	BUILTIN	1x 10GE(LAN/WAN)
Xcvr 0		NON-JNPR	MYBG65I82C	XFP-10G-SR
PIC 1		BUILTIN	BUILTIN	10x 1GE
Xcvr 1	REV 01	740-011782	P7N0368	SFP-SX
Xcvr 4	REV 01	740-011782	P8J1W27	SFP-SX
Xcvr 6	REV 01	740-011782	P8J1VSD	SFP-SX
Xcvr 9	REV 01	740-011782	P8J1W25	SFP-SX
Fan Tray 0				
Fan Tray 1				

show chassis hardware  
(MX2010 Router)

```
user@host > show chassis hardware
```

Hardware inventory:				
Item	Version	Part number	Serial number	Description
Chassis			JN11E3217AFK	MX2010
Midplane	REV 01	750-044636	ABAB8506	Lower Backplane
Midplane 1	REV 01	711-044557	ZY8296	Upper Backplane



PMP	REV 03	711-032426	ACA11388	Power Midplane
FPM Board	REV 06	711-032349	ZX8744	Front Panel Display
PSM 4 Module	REV 0C	740-033727	VK00254	DC 52V Power Supply
PSM 5 Module	REV 0B	740-033727	VG00015	DC 52V Power Supply
PSM 6 Module	REV 0B	740-033727	VH00097	DC 52V Power Supply
PSM 7 Module	REV 0C	740-033727	VJ00151	DC 52V Power Supply
PSM 8 Module	REV 0C	740-033727	VJ00149	DC 52V Power Supply
PDM 0	REV 0B	740-038109	WA00008	DC Power Dist Module
PDM 1	REV 0B	740-038109	WA00014	DC Power Dist Module
Routing Engine 0	REV 02	740-041821	9009094134	RE-S-1800x4
Routing Engine 1	REV 02	740-041821	9009094141	RE-S-1800x4
CB 0	REV 08	750-040257	CAAB3491	Control Board
CB 1	REV 08	750-040257	CAAB3489	Control Board
SPMB 0	REV 02	711-041855	CAA6135	PMB Board
SPMB 1	REV 02	711-041855	CAA6137	PMB Board
SFB 0	REV 06	711-032385	ZV1828	Switch Fabric Board
SFB 1	REV 07	711-032385	ZZ2568	Switch Fabric Board
SFB 2	REV 07	711-032385	ZZ2563	Switch Fabric Board
SFB 3	REV 07	711-032385	ZZ2564	Switch Fabric Board
SFB 4	REV 07	711-032385	ZZ2580	Switch Fabric Board
SFB 5	REV 07	711-032385	ZZ2579	Switch Fabric Board
SFB 6	REV 07	711-032385	CAAB4882	Switch Fabric Board
SFB 7	REV 07	711-032385	CAAB4898	Switch Fabric Board
FPC 0	REV 33	750-028467	CAAB1919	MPC 3D 16x 10GE
CPU	REV 11	711-029089	CAAB7174	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	AMH02RE	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	AMH038C	SFP+-10G-SR
Xcvr 2	REV 01	740-021308	AMH0390	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	AMG0SUA	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	AMH0579	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	AMG0SGP	SFP+-10G-SR
Xcvr 2	REV 01	740-021308	AMH04SV	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	AMH04X3	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	AMH0135	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	AMH02NC	SFP+-10G-SR
Xcvr 2	REV 01	740-021308	AMH02XB	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	AMH02PN	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	AMH057Y	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	AMG0JHE	SFP+-10G-SR
Xcvr 2	REV 01	740-021308	AMH02HT	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	AMH04V4	SFP+-10G-SR
FPC 1	REV 21	750-033205	ZG5027	MPCE Type 3D
CPU	REV 04	711-035209	YT4780	HMPC PMB 2G
MIC 0	REV 03	750-033307	ZV6299	10X10GE SFPP
PIC 0		BUILTIN	BUILTIN	10X10GE SFPP
Xcvr 0	REV 01	740-031980	083363A00410	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	083363A00334	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	113363A00125	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	083363A00953	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	AHR013D	SFP+-10G-SR
Xcvr 5	REV 01	740-031980	AJ40JUR	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	AJ40JKL	SFP+-10G-SR



Xcvr 7	REV 01	740-031980	AJ30ECK	SFP+-10G-SR
Xcvr 8	REV 01	740-021308	19T511100864	SFP+-10G-SR
Xcvr 9	REV 01	740-021308	19T511100868	SFP+-10G-SR
MIC 1	REV 03	750-033307	ZV6268	10X10GE SFPP
PIC 2		BUILTIN	BUILTIN	10X10GE SFPP
Xcvr 0	REV 01	740-031980	AJCOJML	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AJ403PC	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AJ10N25	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AJ40JF4	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	AJ40JSJ	SFP+-10G-SR
Xcvr 5	REV 01	740-031980	AJ403V7	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	AJ40JN3	SFP+-10G-SR
Xcvr 7	REV 01	740-031980	AJ40JSU	SFP+-10G-SR
Xcvr 8	REV 01	740-021308	19T511100468	SFP+-10G-SR
Xcvr 9	REV 01	740-021308	19T511101363	SFP+-10G-SR
FPC 8	REV 22	750-031089	ZT9746	MPC Type 2 3D
CPU	REV 06	711-030884	ZS1271	MPC PMB 2G
MIC 0	REV 26	750-028392	ABBS1150	3D 20x 1GE(LAN) SFP
PIC 0		BUILTIN	BUILTIN	10x 1GE(LAN) SFP
Xcvr 0	REV 01	740-031851	PLG023C	SFP-SX
Xcvr 1	REV 01	740-031851	PLG09C6	SFP-SX
Xcvr 2	REV 02	740-011613	AM0950SF9L7	SFP-SX
Xcvr 3	REV 02	740-011613	AM1001SFN1H	SFP-SX
Xcvr 4	REV 02	740-011613	AM1001SFM9D	SFP-SX
Xcvr 5	REV 02	740-011613	AM1001SFLTJ	SFP-SX
Xcvr 6	REV 01	740-031851	AC1108S03L9	SFP-SX
Xcvr 7	REV 01	740-031851	AC1102S00NC	SFP-SX
Xcvr 8	REV 01	740-031851	AC1102S00MX	SFP-SX
Xcvr 9	REV 01	740-031851	AC1102S0085	SFP-SX
PIC 1		BUILTIN	BUILTIN	10x 1GE(LAN) SFP
Xcvr 0	REV 01	740-031851	AC1102S00KU	SFP-SX
Xcvr 1	REV 01	740-031851	AC1102S00NG	SFP-SX
Xcvr 2	REV 01	740-031851	AC1102S00K3	SFP-SX
Xcvr 3	REV 01	740-031851	AC1102S008R	SFP-SX
Xcvr 4	REV 01	740-031851	AM1107SUFVJ	SFP-SX
Xcvr 5	REV 01	740-031851	AC1108S03LG	SFP-SX
MIC 1	REV 26	750-028387	ABBR9582	3D 4x 10GE XFP
PIC 2		BUILTIN	BUILTIN	2x 10GE XFP
Xcvr 0		NON-JNPR	T10A91703	XFP-10G-SR
Xcvr 1		NON-JNPR	T09L42604	XFP-10G-SR
PIC 3		BUILTIN	BUILTIN	2x 10GE XFP
FPC 9	REV 11	750-036284	ZL3591	MPC 3D 16x 10GE EM
CPU	REV 10	711-029089	ZL0513	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	1YT517101825	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	1YT517101821	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	1YT517101682	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	ALQ13R6	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	1YT517101828	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	1YT517101716	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	1YT517101732	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	ALPOTR1	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	1YT517101741	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	1YT517101829	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	1YT517101669	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	ALQ14E3	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	1YT517101826	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	1YT517101817	SFP+-10G-SR



Xcvr 2	REV 01	740-031980	1YT517101735	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	ALQ159A	SFP+-10G-SR
ADC 0	REV 05	750-043596	CAAC2073	Adapter Card
ADC 1	REV 01	750-043596	ZV4117	Adapter Card
ADC 8	REV 01	750-043596	ZV4107	Adapter Card
ADC 9	REV 02	750-043596	ZW1555	Adapter Card
Fan Tray 0	REV 2A	760-046960	ACAY0015	172mm FanTray - 6 Fans
Fan Tray 1	REV 2A	760-046960	ACAY0019	172mm FanTray - 6 Fans
Fan Tray 2	REV 2A	760-046960	ACAY0020	172mm FanTray - 6 Fans
Fan Tray 3	REV 2A	760-046960	ACAY0021	172mm FanTray - 6 Fans

### show chassis hardware detail (MX2010 Router)

user@host > show chassis hardware detail

Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			JN11E233DAFK	MX2010
Midplane	REV 26	750-044636	ABAB9357	Lower Backplane
Midplane 1	REV 01	711-044557	ABAB8643	Upper Backplane
PMP	REV 04	711-032426	ACAJ1677	Power Midplane
FPM Board	REV 08	760-044634	ABBV9726	Front Panel Display
PSM 0	REV 01	740-045050	1E02224000P	DC 52V Power Supply
Module				
PSM 1	REV 01	740-045050	1E02224000M	DC 52V Power Supply
Module				
PSM 2	REV 01	740-045050	1E022240010	DC 52V Power Supply
Module				
PSM 3	REV 01	740-045050	1E02224000G	DC 52V Power Supply
Module				
PSM 4	REV 01	740-045050	1E022240013	DC 52V Power Supply
Module				
PSM 5	REV 01	740-045050	1E022240007	DC 52V Power Supply
Module				
PSM 6	REV 01	740-045050	1E02224001C	DC 52V Power Supply
Module				
PSM 7	REV 01	740-045050	1E02224001D	DC 52V Power Supply
Module				
PSM 8	REV 01	740-045050	1E02224001B	DC 52V Power Supply
Module				
PDM 0	REV 01	740-045234	1E262250067	DC Power Dist Module
Routing Engine 0	REV 02	740-041821	9009099704	RE-S-1800x4
ad0 3831 MB	UGB30SFA4000T1		SFA4000T1 00000651	Compact Flash
ad1 30533 MB	UGB94BPH32H0S1-KCI		11000019592	Disk 1
usb0 (addr 1)	EHCI root hub 0		Intel	uhub0
usb0 (addr 2)	product 0x0020 32		vendor 0x8087	uhub1
DIMM 0	SGU04G72H1BD2SA-BB DIE	REV-52 PCB REV-54	MFR ID-ce80	
DIMM 1	SGU04G72H1BD2SA-BB DIE	REV-52 PCB REV-54	MFR ID-ce80	
DIMM 2	SGU04G72H1BD2SA-BB DIE	REV-52 PCB REV-54	MFR ID-ce80	
DIMM 3	SGU04G72H1BD2SA-BB DIE	REV-52 PCB REV-54	MFR ID-ce80	
Routing Engine 1	REV 02	740-041821	9009099706	RE-S-1800x4
ad0 3998 MB	Virtium - TuffDrive	VCF P1T0200262860208	114	Compact Flash
ad1 30533 MB	UGB94ARF32H0S3-KC		UNIGEN-499551-000404	Disk 1
CB 0	REV 13	750-040257	CAAF8436	Control Board
CB 1	REV 13	750-040257	CAAF8434	Control Board
SPMB 0	REV 02	711-041855	ABBV3825	PMB Board
SPMB 1	REV 02	711-041855	ABBV3833	PMB Board
SFB 0	REV 05	711-044466	ABBX5682	Switch Fabric Board
SFB 1	REV 05	711-044466	ABBX5676	Switch Fabric Board
SFB 2	REV 05	711-044466	ABBX5665	Switch Fabric Board
SFB 3	REV 05	711-044466	ABBX5699	Switch Fabric Board
SFB 4	REV 05	711-044466	ABBX5603	Switch Fabric Board
SFB 5	REV 05	711-044466	ABBX5587	Switch Fabric Board
SFB 6	REV 05	711-044466	ABBX5607	Switch Fabric Board



SFB 7	REV 05	711-044466	ABBX5669	Switch Fabric Board
FPC 0	REV 09	750-037355	CAAF0924	MPC Type 4-2
CPU	REV 08	711-035209	CAAB9842	HMPC PMB 2G
PIC 0		BUILTIN	BUILTIN	4x10GE SFPP
Xcvr 0	REV 01	740-021308	19T511101656	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AMA04RU	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	193363A00558	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B10M00202	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	1X100GE CFP
Xcvr 0		NON-JNPR	X12J00328	CFP-100G-SR10
PIC 2		BUILTIN	BUILTIN	4x10GE SFPP
Xcvr 0	REV 01	740-031980	AMA088W	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B10L04211	SFP+-10G-SR
Xcvr 2	REV 01	740-021308	19T511101602	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B10L04151	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	1X100GE CFP
Xcvr 0		NON-JNPR	X12J00332	CFP-100G-SR10
FPC 1	REV 18	750-033205	ZE0128	MPCE Type 3D
CPU	REV 06	711-035209	ZG5431	HMPC PMB 2G
MIC 0	REV 15	750-033199	ZP6435	1X100GE CFP
PIC 0		BUILTIN	BUILTIN	1X100GE CFP
Xcvr 0	REV 01	740-032210	J11E46118	CFP-100G-LR4
MIC 1	REV 15	750-033199	ZP6442	1X100GE CFP
PIC 2		BUILTIN	BUILTIN	1X100GE CFP
Xcvr 0	REV 01	740-032210	UMN03T4	CFP-100G-LR4
FPC 2	REV 16	750-037358	CAAL1001	MPC Type 4-1
CPU	REV 08	711-035209	CAAK7927	HMPC PMB 2G
PIC 0		BUILTIN	BUILTIN	8X10GE SFPP
Xcvr 0	REV 01	740-031980	193363A00589	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	973152A00028	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	193363A00376	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	973152A00016	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	193363A00499	SFP+-10G-SR
Xcvr 5	REV 01	740-021308	973152A00039	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	B11E01239	SFP+-10G-SR
Xcvr 7	REV 01	740-021308	973152A00058	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	8X10GE SFPP
Xcvr 0	REV 01	740-031980	B10M00075	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	973152A00014	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AMA0638	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	973152A00063	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	AMA0629	SFP+-10G-SR
Xcvr 5	REV 01	740-021308	973152A00053	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	193363A00344	SFP+-10G-SR
Xcvr 7	REV 01	740-021308	973152A00046	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	8X10GE SFPP
Xcvr 0	REV 01	740-031980	AMA062M	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	973152A00080	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	193363A00580	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	973152A00064	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	093363A01494	SFP+-10G-SR
Xcvr 5	REV 01	740-021308	973152A00020	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	123363A00047	SFP+-10G-SR
Xcvr 7	REV 01	740-021308	973152A00072	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	8X10GE SFPP
Xcvr 0	REV 01	740-021308	03DZ06A01033	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	973152A00022	SFP+-10G-SR
Xcvr 2	REV 01	740-021308	03DZ06A01026	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	973152A00013	SFP+-10G-SR
Xcvr 4	REV 01	740-021308	03DZ06A01028	SFP+-10G-SR
Xcvr 5	REV 01	740-021308	973152A00079	SFP+-10G-SR



Xcvr 6	REV 01	740-021308	03D206A01018	SFP+-10G-SR
Xcvr 7	REV 01	740-021308	973152A00025	SFP+-10G-SR
FPC 3	REV 33	750-028467	CAAF5400	MPC 3D 16x 10GE
CPU	REV 11	711-029089	CAAH7626	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	973152A00066	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	973152A00021	SFP+-10G-SR
Xcvr 2	REV 01	740-021308	973152A00062	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	973152A00027	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	973152A00065	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	973152A00069	SFP+-10G-SR
Xcvr 2	REV 01	740-021308	973152A00026	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	973152A00003	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	973152A00035	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	973152A00004	SFP+-10G-SR
Xcvr 2	REV 01	740-021308	973152A00049	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	973152A00055	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	973152A00010	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	973152A00001	SFP+-10G-SR
Xcvr 2	REV 01	740-021308	973152A00073	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	973152A00012	SFP+-10G-SR
FPC 4	REV 21	750-033205	ZG5028	MPCE Type 3D
CPU	REV 05	711-035209	YX3911	HMPC PMB 2G
MIC 0	REV 03	750-036233	ZL2036	2X40GE QSFP
PIC 0		BUILTIN	BUILTIN	2X40GE QSFP
Xcvr 0	REV 01	740-032986	QB220708	QSFP+-40G-SR4
Xcvr 1	REV 01	740-032986	QB220735	QSFP+-40G-SR4
MIC 1	REV 03	750-036233	ZL2028	2X40GE QSFP
PIC 2		BUILTIN	BUILTIN	2X40GE QSFP
Xcvr 0	REV 01	740-032986	QB220727	QSFP+-40G-SR4
Xcvr 1	REV 01	740-032986	QB220715	QSFP+-40G-SR4
FPC 5	REV 11	750-037358	CAAE2196	MPC Type 4-1
CPU	REV 08	711-035209	CAAD9074	HMPC PMB 2G
PIC 0		BUILTIN	BUILTIN	8X10GE SFPP
Xcvr 0	REV 01	740-031980	AMA062S	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AMA062P	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AMA052R	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AMA0632	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	193363A00564	SFP+-10G-SR
Xcvr 5	REV 01	740-031980	193363A00229	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	193363A00363	SFP+-10G-SR
Xcvr 7	REV 01	740-031980	193363A00278	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	8X10GE SFPP
Xcvr 0	REV 01	740-031980	AMA04CC	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	AD0927A001W	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AMA04N2	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AMA062U	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	193363A00491	SFP+-10G-SR
Xcvr 5	REV 01	740-031980	183363A01511	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	193363A00565	SFP+-10G-SR
Xcvr 7	REV 01	740-031980	193363A00405	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	8X10GE SFPP
Xcvr 0	REV 01	740-031980	AMA07QX	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AMA06MS	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	193363A00318	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	193363A00402	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	193363A00174	SFP+-10G-SR
Xcvr 5	REV 01	740-031980	193363A00388	SFP+-10G-SR



Xcvr 6	REV 01	740-031980	193363A00377	SFP+-10G-SR
Xcvr 7	REV 01	740-031980	193363A00234	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	8X10GE SFPP
Xcvr 0	REV 01	740-031980	AMA062T	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	193363A00550	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	193363A00364	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AMA0630	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	193363A00509	SFP+-10G-SR
Xcvr 5	REV 01	740-031980	193363A00459	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	113363A00191	SFP+-10G-SR
Xcvr 7	REV 01	740-031980	193363A00352	SFP+-10G-SR
FPC 6	REV 33	750-028467	CAAF5552	MPC 3D 16x 10GE
CPU	REV 11	711-029089	CAAH7601	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	AD0927A0036	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	AD0927A003M	SFP+-10G-SR
Xcvr 2	REV 01	740-021308	AD0927A003G	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	AD0927A0031	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	193363A00331	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	193363A00325	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	193363A00417	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	183363A02509	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	T09K75140	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11A04356	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11K01952	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11K01914	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	T09K75157	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	T09K75194	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11K01926	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11K01936	SFP+-10G-SR
FPC 7	REV 16	750-037358	CAAL1012	MPC Type 4-1
CPU	REV 08	711-035209	CAAJ3851	HMPC PMB 2G
PIC 0		BUILTIN	BUILTIN	8X10GE SFPP
Xcvr 0	REV 01	740-031980	AMA04NK	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11F00260	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11E02192	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AMA04CP	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	AJ40JJK	SFP+-10G-SR
Xcvr 5	REV 01	740-031980	B11F00238	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	B10M00275	SFP+-10G-SR
Xcvr 7	REV 01	740-031980	193363A00211	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	8X10GE SFPP
Xcvr 0	REV 01	740-031980	B11D05577	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11G00586	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AMA08B7	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AMA04Q0	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	B11D05840	SFP+-10G-SR
Xcvr 5	REV 01	740-031980	B11E00467	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	B11E00029	SFP+-10G-SR
Xcvr 7	REV 01	740-021308	19T511101712	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	8X10GE SFPP
Xcvr 0	REV 01	740-031980	193363A00568	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B10M00166	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B10M00212	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11D05823	SFP+-10G-SR
Xcvr 4	REV 01	740-021308	03DZ06A01005	SFP+-10G-SR
Xcvr 5	REV 01	740-021308	03DZ06A01003	SFP+-10G-SR
Xcvr 6	REV 01	740-021308	03DZ06A01009	SFP+-10G-SR



Xcvr 7	REV 01	740-021308	03DZ06A01004	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	8X10GE SFPP
Xcvr 0	REV 01	740-021308	03DZ06A01017	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	03DZ06A01016	SFP+-10G-SR
Xcvr 2	REV 01	740-021308	03DZ06A01024	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	03DZ06A01008	SFP+-10G-SR
Xcvr 4	REV 01	740-030658	AD0946A02UH	SFP+-10G-USR
Xcvr 5	REV 01	740-021308	T09J67913	SFP+-10G-SR
Xcvr 6	REV 01	740-021308	AD0837ES09G	SFP+-10G-SR
Xcvr 7	REV 01	740-021308	03DZ06A01015	SFP+-10G-SR
FPC 8	REV 03	750-045372	CAAD3111	MPCE Type 3D
CPU	REV 08	711-035209	CAAD8033	HMPC PMB 2G
MIC 0	REV 03	750-036233	ZL2032	2X40GE QSFP
PIC 0		BUILTIN	BUILTIN	2X40GE QSFP
Xcvr 0	REV 01	740-032986	QB230273	QSFP+-40G-SR4
Xcvr 1	REV 01	740-032986	QB230254	QSFP+-40G-SR4
MIC 1	REV 03	750-036233	ZL2021	2X40GE QSFP
PIC 2		BUILTIN	BUILTIN	2X40GE QSFP
Xcvr 0	REV 01	740-032986	QB390962	QSFP+-40G-SR4
Xcvr 1	REV 01	740-032986	QB390960	QSFP+-40G-SR4
FPC 9	REV 09	750-037355	CAAF1531	MPC Type 4-2
CPU	REV 08	711-035209	CAAB9927	HMPC PMB 2G
PIC 0		BUILTIN	BUILTIN	4x10GE SFPP
Xcvr 0	REV 01	740-031980	193363A00525	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	193363A00504	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	193363A00368	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AJ40JSS	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	1X100GE CFP
PIC 2		BUILTIN	BUILTIN	4x10GE SFPP
Xcvr 0	REV 01	740-031980	123363A00042	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B10M00023	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AJ802EM	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11E02348	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	1X100GE CFP
ADC 0	REV 13	750-043596	ABBX5532	Adapter Card
ADC 1	REV 13	750-043596	ABBX5550	Adapter Card
ADC 2	REV 13	750-043596	ABBX5571	Adapter Card
ADC 3	REV 13	750-043596	ABBX5568	Adapter Card
ADC 4	REV 13	750-043596	ABBX5556	Adapter Card
ADC 5	REV 13	750-043596	ABBX5553	Adapter Card
ADC 6	REV 13	750-043596	ABBX5541	Adapter Card
ADC 7	REV 13	750-043596	ABBX5578	Adapter Card
ADC 8	REV 13	750-043596	ABBX5560	Adapter Card
ADC 9	REV 07	750-043596	ABBV7188	Adapter Card
Fan Tray 0	REV 03	760-046960	ACAY0127	172mm FanTray - 6 Fans
Fan Tray 1	REV 2A	760-046960	ACAY0068	172mm FanTray - 6 Fans
Fan Tray 2	REV 2A	760-046960	ACAY0072	172mm FanTray - 6 Fans
Fan Tray 3	REV 2A	760-046960	ACAY0070	172mm FanTray - 6 Fans

### show chassis hardware extensive (MX2010 Router)

```
user@host > show chassis hardware extensive
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis			JN11E233DAFK	MX2010

Jedec Code:	0x7fb0	EEPROM Version:	0x02
		S/N:	JN11E233DAFK
Assembly ID:	0x0557	Assembly Version:	00.00
Date:	00-00-0000	Assembly Flags:	0x00

```
ID: MX2010
```

```
Board Information Record:
```

```
Address 0x00: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
```

```
I2C Hex Data:
```



```

Address 0x00: 7f b0 02 ff 05 57 00 00 00 00 00 00 00 00 00
Address 0x10: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
Address 0x20: 4a 4e 31 31 45 32 33 33 44 41 46 4b 00 00 00
Address 0x30: 00 00 00 ff 00 00 00 00 00 00 00 00 00 00 00
Address 0x40: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
Address 0x50: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
Address 0x60: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
Address 0x70: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
Midplane      REV 26   750-044636   ABAB9357           Lower Backplane
Jedec Code:   0x7fb0           EEPROM Version:   0x02
P/N:          750-044636       S/N:             S/N ABAB9357
Assembly ID:  0x0b66           Assembly Version: 01.26
Date:         08-28-2012       Assembly Flags:   0x00
Version:      REV 26           CLEI Code:        PROTOXCLEI
ID: Lower Backplane           FRU Model Number: PROTO-ASSEMBLY
Board Information Record:
Address 0x00: ad 01 08 00 2c 21 72 70 a0 00 ff ff ff ff ff ff
I2C Hex Data:
Address 0x00: 7f b0 02 ff 0b 66 01 1a 52 45 56 20 32 36 00 00
Address 0x10: 00 00 00 00 37 35 30 2d 30 34 34 36 33 36 00 00
Address 0x20: 53 2f 4e 20 41 42 41 42 39 33 35 37 00 1c 08 07
Address 0x30: dc ff ff ff ad 01 08 00 2c 21 72 70 a0 00 ff ff
Address 0x40: ff ff ff ff 01 50 52 4f 54 4f 58 43 4c 45 49 50
Address 0x50: 52 4f 54 4f 2d 41 53 53 45 4d 42 4c 59 00 00 00
Address 0x60: 00 00 00 00 00 00 41 30 30 ff ff ff ff ff ff ff
Address 0x70: ff ff ff c2 ff ff ff ff ff ff ff ff ff ff ff ff
Midplane 1    REV 01   711-044557   ABAB8643           Upper Backplane
Jedec Code:   0x7fb0           EEPROM Version:   0x01
P/N:          711-044557       S/N:             S/N ABAB8643
Assembly ID:  0x0b65           Assembly Version: 01.01
Date:         07-27-2012       Assembly Flags:   0x00
Version:      REV 01
ID: Upper Backplane
Board Information Record:
Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
I2C Hex Data:
Address 0x00: 7f b0 01 ff 0b 65 01 01 52 45 56 20 30 31 00 00
Address 0x10: 00 00 00 00 37 31 31 2d 30 34 34 35 35 37 00 00
Address 0x20: 53 2f 4e 20 41 42 41 42 38 36 34 33 00 1b 07 07
Address 0x30: dc ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x40: ff ff ff ff 00 ff ff ff ff ff ff ff ff ff ff ff
Address 0x50: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x60: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x70: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
PMP           REV 04   711-032426   ACAJ1677           Power Midplane
Jedec Code:   0x7fb0           EEPROM Version:   0x01
P/N:          711-032426       S/N:             S/N ACAJ1677
Assembly ID:  0x045d           Assembly Version: 01.04
Date:         07-20-2012       Assembly Flags:   0x00
Version:      REV 04
ID: Power Midplane
Board Information Record:
Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
I2C Hex Data:
Address 0x00: 7f b0 01 ff 04 5d 01 04 52 45 56 20 30 34 00 00
Address 0x10: 00 00 00 00 37 31 31 2d 30 33 32 34 32 36 00 00
Address 0x20: 53 2f 4e 20 41 43 41 4a 31 36 37 37 00 14 07 07
Address 0x30: dc ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x40: ff ff ff ff 00 ff ff ff ff ff ff ff ff ff ff ff
Address 0x50: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x60: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff

```



```

Address 0x70: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
FPM Board      REV 08    760-044634    ABBV9726      Front Panel Display
Jedec Code:    0x7fb0      EEPROM Version: 0x02
P/N:           760-044634    S/N:           S/N ABBV9726
Assembly ID:   0x0b64      Assembly Version: 01.08
Date:          09-10-2012    Assembly Flags: 0x00
Version:       REV 08      CLEI Code:     IPMYA4EJRA
ID: Front Panel Display    FRU Model Number: MX2010-CRAFT-S
Board Information Record:
Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
I2C Hex Data:
Address 0x00: 7f b0 02 ff 0b 64 01 08 52 45 56 20 30 38 00 00
Address 0x10: 00 00 00 00 37 36 30 2d 30 34 34 36 33 34 00 00
Address 0x20: 53 2f 4e 20 41 42 42 56 39 37 32 36 00 0a 09 07
Address 0x30: dc ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x40: ff ff ff ff 01 49 50 4d 59 41 34 45 4a 52 41 4d
Address 0x50: 58 32 30 31 30 2d 43 52 41 46 54 2d 53 00 00 00
Address 0x60: 00 00 00 00 00 00 41 00 00 ff ff ff ff ff ff ff
Address 0x70: ff ff ff 93 ff ff ff ff ff ff ff ff ff ff ff ff
PSM 0          REV 01    740-045050    1E02224000P    DC 52V Power Supply
Module
Jedec Code:    0x7fb0      EEPROM Version: 0x02
P/N:           740-045050    S/N:           1E02224000P
Assembly ID:   0x0478      Assembly Version: 01.01
Date:          12-06-2012    Assembly Flags: 0x00
Version:       REV 01      CLEI Code:     XXXXXXXXXX
ID: DC 52V Power Supply Module FRU Model Number: MX2000-PSM-HC-DC-S-A
Board Information Record:
Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
I2C Hex Data:
Address 0x00: 7f b0 02 ff 04 78 01 01 52 45 56 20 30 31 00 00
Address 0x10: 00 00 00 00 37 34 30 2d 30 34 35 30 35 30 00 00
Address 0x20: 31 45 30 32 32 32 34 30 30 30 50 00 00 06 0c 07
Address 0x30: dc ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x40: ff ff ff ff 01 58 58 58 58 58 58 58 58 58 58 4d
Address 0x50: 58 32 30 30 30 2d 50 53 4d 2d 48 43 2d 44 43 2d
Address 0x60: 53 2d 41 00 00 00 31 30 31 ff ff ff ff ff ff ff
Address 0x70: ff ff ff 4a 00 00 00 00 00 00 00 00 00 00 00 00
PSM 1          REV 01    740-045050    1E02224000M    DC 52V Power Supply
Module
Jedec Code:    0x7fb0      EEPROM Version: 0x02
P/N:           740-045050    S/N:           1E02224000M
Assembly ID:   0x0478      Assembly Version: 01.01
Date:          12-06-2012    Assembly Flags: 0x00
Version:       REV 01      CLEI Code:     XXXXXXXXXX
ID: DC 52V Power Supply Module FRU Model Number: MX2000-PSM-HC-DC-S-A
Board Information Record:
Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
I2C Hex Data:
Address 0x00: 7f b0 02 ff 04 78 01 01 52 45 56 20 30 31 00 00
Address 0x10: 00 00 00 00 37 34 30 2d 30 34 35 30 35 30 00 00
Address 0x20: 31 45 30 32 32 32 34 30 30 30 4d 00 00 06 0c 07
Address 0x30: dc ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x40: ff ff ff ff 01 58 58 58 58 58 58 58 58 58 58 4d
Address 0x50: 58 32 30 30 30 2d 50 53 4d 2d 48 43 2d 44 43 2d
Address 0x60: 53 2d 41 00 00 00 31 30 31 ff ff ff ff ff ff ff
Address 0x70: ff ff ff 4a 00 00 00 00 00 00 00 00 00 00 00 00
...
PDM 0          REV 01    740-045234    1E262250067    DC Power Dist Module
Jedec Code:    0x7fb0      EEPROM Version: 0x02
P/N:           740-045234    S/N:           1E262250067

```



```

Assembly ID: 0x047b      Assembly Version: 01.01
Date: 06-28-2012        Assembly Flags: 0x00
Version: REV 01         CLEI Code: IPUPAJSKAA
ID: DC Power Dist Module FRU Model Number: MX2000-PDM-DC-S-A
Board Information Record:
  Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
I2C Hex Data:
  Address 0x00: 7f b0 02 ff 04 7b 01 01 52 45 56 20 30 31 00 00
  Address 0x10: 00 00 00 00 37 34 30 2d 30 34 35 32 33 34 00 00
  Address 0x20: 31 45 32 36 32 32 35 30 30 36 37 00 00 1c 06 07
  Address 0x30: dc ff ff ff ff ff ff ff ff ff ff ff ff ff ff
  Address 0x40: ff ff ff ff 01 49 50 55 50 41 4a 53 4b 41 41 4d
  Address 0x50: 58 32 30 30 30 2d 50 44 4d 2d 44 43 2d 53 2d 41
  Address 0x60: 00 00 00 00 00 00 31 30 31 ff ff ff ff ff ff ff
  Address 0x70: ff ff ff 89 00 00 00 00 00 00 00 00 00 00 00 00
Routing Engine 0 REV 02 740-041821 9009099704 RE-S-1800x4
Jedec Code: 0x7fb0      EEPROM Version: 0x02
P/N: 740-041821        S/N: 9009099704
Assembly ID: 0x09c0     Assembly Version: 01.02
Date: 03-15-2012       Assembly Flags: 0x00
Version: REV 02
ID: RE-S-1800x4        FRU Model Number: RE-S-1800X4-16G-S
Board Information Record:
  Address 0x00: 54 32 30 32 37 44 41 2d 34 34 47 42 23 41 23 00
I2C Hex Data:
  Address 0x00: 7f b0 02 ff 09 c0 01 02 52 45 56 20 30 32 00 00
  Address 0x10: 00 00 00 00 37 34 30 2d 30 34 31 38 32 31 00 00
  Address 0x20: 39 30 30 39 30 39 39 37 30 34 00 00 00 0f 03 07
  Address 0x30: dc ff ff ff 54 32 30 32 37 44 41 2d 34 34 47 42
  Address 0x40: 23 41 23 00 01 00 00 00 00 00 00 00 00 00 00 52
  Address 0x50: 45 2d 53 2d 31 38 30 30 58 34 2d 31 36 47 2d 53
  Address 0x60: 00 00 00 00 00 00 41 30 30 ff ff ff ff ff ff ff
  Address 0x70: ff ff ff 8c ff ff ff ff ff ff ff ff ff ff ff ff
ad0 3831 MB UGB30SFA4000T1 SFA4000T1 00000651 Compact Flash
ad1 30533 MB UGB94BPH32H0S1-KCI 11000019592 Disk 1
usb0 (addr 1) EHCI root hub 0 Intel uhub0
usb0 (addr 2) product 0x0020 32 vendor 0x8087 uhub1
DIMM 0 SGU04G72H1BD2SA-BB DIE REV-52 PCB REV-54 MFR ID-ce80
DIMM 1 SGU04G72H1BD2SA-BB DIE REV-52 PCB REV-54 MFR ID-ce80
DIMM 2 SGU04G72H1BD2SA-BB DIE REV-52 PCB REV-54 MFR ID-ce80
DIMM 3 SGU04G72H1BD2SA-BB DIE REV-52 PCB REV-54 MFR ID-ce80
Routing Engine 1 REV 02 740-041821 9009099706 RE-S-1800x4
Jedec Code: 0x7fb0      EEPROM Version: 0x02
P/N: 740-041821        S/N: 9009099706
Assembly ID: 0x09c0     Assembly Version: 01.02
Date: 02-23-2012       Assembly Flags: 0x00
Version: REV 02
ID: RE-S-1800x4        FRU Model Number: RE-S-1800X4-16G-S
Board Information Record:
  Address 0x00: 54 32 30 32 37 44 41 2d 34 34 47 42 23 41 23 00
I2C Hex Data:
  Address 0x00: 7f b0 02 ff 09 c0 01 02 52 45 56 20 30 32 00 00
  Address 0x10: 00 00 00 00 37 34 30 2d 30 34 31 38 32 31 00 00
  Address 0x20: 39 30 30 39 30 39 39 37 30 36 00 00 00 17 02 07
  Address 0x30: dc ff ff ff 54 32 30 32 37 44 41 2d 34 34 47 42
  Address 0x40: 23 41 23 00 01 00 00 00 00 00 00 00 00 00 00 52
  Address 0x50: 45 2d 53 2d 31 38 30 30 58 34 2d 31 36 47 2d 53
  Address 0x60: 00 00 00 00 00 00 41 30 30 ff ff ff ff ff ff ff
  Address 0x70: ff ff ff 8c ff ff ff ff ff ff ff ff ff ff ff ff
ad0 3998 MB Virtium - TuffDrive VCF P1T0200262860208 114 Compact Flash
ad1 30533 MB UGB94ARF32H0S3-KC UNIGEN-499551-000404 Disk 1

```



```

CB 0          REV 13   750-040257   CAAF8436          Control Board
Jedec Code:   0x7fb0          EEPROM Version:   0x02
P/N:         750-040257      S/N:         S/N CAAF8436
Assembly ID: 0x0b26          Assembly Version: 01.13
Date:        08-29-2012      Assembly Flags: 0x00
Version:     REV 13          CLEI Code:    PROTOXCLEI
ID: Control Board          FRU Model Number: PROTO-ASSEMBLY
Board Information Record:
  Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
I2C Hex Data:
  Address 0x00: 7f b0 02 ff 0b 26 01 0d 52 45 56 20 31 33 00 00
  Address 0x10: 00 00 00 00 37 35 30 2d 30 34 30 32 35 37 00 00
  Address 0x20: 53 2f 4e 20 43 41 41 46 38 34 33 36 00 1d 08 07
  Address 0x30: dc ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
  Address 0x40: ff ff ff ff 01 50 52 4f 54 4f 58 43 4c 45 49 50
  Address 0x50: 52 4f 54 4f 2d 41 53 53 45 4d 42 4c 59 00 00 00
  Address 0x60: 00 00 00 00 00 00 41 30 30 ff ff ff ff ff ff ff
  Address 0x70: ff ff ff c2 ff ff ff ff ff ff ff ff ff ff ff ff
...
SPMB 0        REV 02   711-041855   ABBV3825          PMB Board
Jedec Code:   0x7fb0          EEPROM Version:   0x01
P/N:         711-041855      S/N:         S/N ABBV3825
Assembly ID: 0x0b29          Assembly Version: 01.02
Date:        08-14-2012      Assembly Flags: 0x00
Version:     REV 02
ID: PMB Board
Board Information Record:
  Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
I2C Hex Data:
  Address 0x00: 7f b0 01 ff 0b 29 01 02 52 45 56 20 30 32 00 00
  Address 0x10: 00 00 00 00 37 31 31 2d 30 34 31 38 35 35 00 00
  Address 0x20: 53 2f 4e 20 41 42 42 56 33 38 32 35 00 0e 08 07
  Address 0x30: dc ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
  Address 0x40: ff ff ff ff 00 ff ff ff ff ff ff ff ff ff ff ff
  Address 0x50: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
  Address 0x60: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
  Address 0x70: ff ff ff ff 00 00 00 00 00 00 00 00 00 00 00 00
...
SFB 0          REV 05   711-044466   ABBX5682          Switch Fabric Board
Jedec Code:   0x7fb0          EEPROM Version:   0x02
P/N:         711-044466      S/N:         S/N ABBX5682
Assembly ID: 0x0b25          Assembly Version: 01.05
Date:        09-07-2012      Assembly Flags: 0x00
Version:     REV 05          CLEI Code:    PROTOXCLEI
ID: Switch Fabric Board      FRU Model Number: PROTO-ASSEMBLY
Board Information Record:
  Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
I2C Hex Data:
  Address 0x00: 7f b0 02 ff 0b 25 01 05 52 45 56 20 30 35 00 00
  Address 0x10: 00 00 00 00 37 31 31 2d 30 34 34 34 36 36 00 00
  Address 0x20: 53 2f 4e 20 41 42 42 58 35 36 38 32 00 07 09 07
  Address 0x30: dc ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
  Address 0x40: ff ff ff ff 01 50 52 4f 54 4f 58 43 4c 45 49 50
  Address 0x50: 52 4f 54 4f 2d 41 53 53 45 4d 42 4c 59 00 00 00
  Address 0x60: 00 00 00 00 00 00 41 30 30 ff ff ff ff ff ff ff
  Address 0x70: ff ff ff c2 00 00 00 01 00 00 00 00 00 00 48 00
...
FPC 0          REV 09   750-037355   CAAF0924          MPC Type 4-2
Jedec Code:   0x7fb0          EEPROM Version:   0x02
P/N:         750-037355      S/N:         S/N CAAF0924
Assembly ID: 0x0b4e          Assembly Version: 01.09

```



```

Date:          05-21-2012      Assembly Flags:    0x00
Version:       REV 09          CLEI Code:        PROTOXCLEI
ID: MPC Type 4-2              FRU Model Number: MPC4E-2CGE-8XGE

```

## Board Information Record:

```
Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
```

## I2C Hex Data:

```

Address 0x00: 7f b0 02 ff 0b 4e 01 09 52 45 56 20 30 39 00 00
Address 0x10: 00 00 00 00 37 35 30 2d 30 33 37 33 35 35 00 00
Address 0x20: 53 2f 4e 20 43 41 41 46 30 39 32 34 00 15 05 07
Address 0x30: dc ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x40: ff ff ff ff 01 50 52 4f 54 4f 58 43 4c 45 49 4d
Address 0x50: 50 43 34 45 2d 32 43 47 45 2d 38 58 47 45 00 00
Address 0x60: 00 00 00 00 00 00 30 39 00 ff ff ff ff ff ff ff
Address 0x70: ff ff ff c6 ff ff ff ff ff ff ff ff ff ff ff ff
CPU          REV 08    711-035209    CAAB9842          H MPC PMB 2G

```

```

Jedec Code:  0x7fb0          EEPROM Version:    0x01
P/N:         711-035209      S/N:              S/N CAAB9842
Assembly ID: 0x0b04          Assembly Version:  01.08
Date:        05-17-2012      Assembly Flags:    0x00
Version:     REV 08
ID: H MPC PMB 2G

```

## Board Information Record:

```
Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
```

## I2C Hex Data:

```

Address 0x00: 7f b0 01 ff 0b 04 01 08 52 45 56 20 30 38 00 00
Address 0x10: 00 00 00 00 37 31 31 2d 30 33 35 32 30 39 00 00
Address 0x20: 53 2f 4e 20 43 41 41 42 39 38 34 32 00 11 05 07
Address 0x30: dc ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x40: ff ff ff ff 00 ff ff ff ff ff ff ff ff ff ff ff
Address 0x50: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x60: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x70: ff ff ff ff 00 00 00 00 00 00 00 00 00 00 00 00
PIC 0          BUILTIN      BUILTIN          4x10GE SFPP

```

```

Jedec Code:  0x0000          EEPROM Version:    0x00
P/N:         BUILTIN         S/N:              BUILTIN
Assembly ID: 0x0a53          Assembly Version:  00.00
Date:        00-00-0000      Assembly Flags:    0x00
ID: 4x10GE SFPP

```

## Board Information Record:

```
Address 0x00: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
```

## I2C Hex Data:

```

Address 0x00: 00 00 00 00 0a 53 00 00 00 00 00 00 00 00 00
Address 0x10: 00 00 00 00 42 55 49 4c 54 49 4e 00 4d 58 43 00
Address 0x20: 42 55 49 4c 54 49 4e 00 4d 58 43 00 00 00 00 00
Address 0x30: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
Address 0x40: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
Address 0x50: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
Address 0x60: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00

```

```
Address 0x70: 00 00 00 00 c0 02 ae 64 00 00 00 00 0a 52 00 00
```

```

Xcvr 0      REV 01    740-021308    19T511101656    SFP+-10G-SR
Xcvr 1      REV 01    740-031980    AMA04RU          SFP+-10G-SR
Xcvr 2      REV 01    740-031980    193363A00558    SFP+-10G-SR
Xcvr 3      REV 01    740-031980    B10M00202        SFP+-10G-SR

```

...

```

ADC 0          REV 13    750-043596    ABBX5532          Adapter Card
Jedec Code:  0x7fb0          EEPROM Version:    0x02
P/N:         750-043596      S/N:              S/N ABBX5532
Assembly ID: 0x0b3d          Assembly Version:  01.13
Date:        09-12-2012      Assembly Flags:    0x00
Version:     REV 13          CLEI Code:        IPUCBA8CAA
ID: Adapter Card              FRU Model Number:  MX2000-LC-ADAPTER

```



```

Board Information Record:
Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
I2C Hex Data:
Address 0x00: 7f b0 02 ff 0b 3d 01 0d 52 45 56 20 31 33 00 00
Address 0x10: 00 00 00 00 37 35 30 2d 30 34 33 35 39 36 00 00
Address 0x20: 53 2f 4e 20 41 42 42 58 35 35 33 32 00 0c 09 07
Address 0x30: dc ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x40: ff ff ff ff 01 49 50 55 43 42 41 38 43 41 41 4d
Address 0x50: 58 32 30 30 30 2d 4c 43 2d 41 44 41 50 54 45 52
Address 0x60: 00 00 00 00 00 00 41 00 00 ff ff ff ff ff ff
Address 0x70: ff ff ff 3a 00 00 00 00 00 00 00 00 00 00 00 00
...

```

### show chassis hardware models (MX2010 Router)

```
user@host > show chassis hardware models
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	FRU model number
FPM Board	REV 06	711-032349	ZX8744	711-032349
PSM 4	REV 0C	740-033727	VK00254	000000000000000000000000
PSM 5	REV 0B	740-033727	VG00015	000000000000000000000000
PSM 6	REV 0B	740-033727	VH00097	000000000000000000000000
PSM 7	REV 0C	740-033727	VJ00151	000000000000000000000000
PSM 8	REV 0C	740-033727	VJ00149	000000000000000000000000
PDM 0	REV 0B	740-038109	WA00008	
PDM 1	REV 0B	740-038109	WA00014	
Routing Engine 0	REV 02	740-041821	9009094134	RE-S-1800X4-16G-S
Routing Engine 1	REV 02	740-041821	9009094141	RE-S-1800X4-16G-S
CB 0	REV 08	750-040257	CAAB3491	750-040257
CB 1	REV 08	750-040257	CAAB3489	750-040257
SFB 0	REV 06	711-032385	ZV1828	711-032385
SFB 1	REV 07	711-032385	ZZ2568	711-032385
SFB 2	REV 07	711-032385	ZZ2563	711-032385
SFB 3	REV 07	711-032385	ZZ2564	711-032385
SFB 4	REV 07	711-032385	ZZ2580	711-032385
SFB 5	REV 07	711-032385	ZZ2579	711-0323856
SFB 6	REV 07	711-032385	CAAB4882	711-044170
SFB 7	REV 07	711-032385	CAAB4898	711-044170
FPC 0	REV 33	750-028467	CAAB1919	MPC-3D-16XGE-SFPP
FPC 1	REV 21	750-033205	ZG5027	MX-MPC3-3D
MIC 0	REV 03	750-033307	ZV6299	MIC3-3D-10XGE-SFPP
MIC 1	REV 03	750-033307	ZV6268	MIC3-3D-10XGE-SFPP
FPC 8	REV 22	750-031089	ZT9746	MX-MPC2-3D
MIC 0	REV 26	750-028392	ABBS1150	MIC-3D-20GE-SFP
MIC 1	REV 26	750-028387	ABBR9582	MIC-3D-4XGE-XFP
FPC 9	REV 11	750-036284	ZL3591	MPCE-3D-16XGE-SFPP
ADC 0	REV 05	750-043596	CAAC2073	750-043596
ADC 1	REV 01	750-043596	ZV4117	750-043596
ADC 8	REV 01	750-043596	ZV4107	750-043596
ADC 9	REV 02	750-043596	ZW1555	750-043596
Fan Tray 0	REV 2A	760-046960	ACAY0015	
Fan Tray 1	REV 2A	760-046960	ACAY0019	
Fan Tray 2	REV 2A	760-046960	ACAY0020	
Fan Tray 3	REV 2A	760-046960	ACAY0021	

### show chassis hardware clei-models (MX2010 Routers)

```
user@host > show chassis hardware clei-models
```

```
Hardware inventory:
```

Item	Version	Part number	CLEI code	FRU model number
FPM Board	REV 06	711-032349	PROTOXCLEI	711-032349
PSM 4	REV 0C	740-033727	0000000000	000000000000000000000000
PSM 5	REV 0B	740-033727	0000000000	000000000000000000000000
PSM 6	REV 0B	740-033727	0000000000	000000000000000000000000



PSM 7	REV 0C	740-033727	0000000000	00000000000000000000000000000000
PSM 8	REV 0C	740-033727	0000000000	00000000000000000000000000000000
PDM 0	REV 0B	740-038109		
PDM 1	REV 0B	740-038109		
Routing Engine 0	REV 02	740-041821		RE-S-1800X4-16G-S
Routing Engine 1	REV 02	740-041821		RE-S-1800X4-16G-S
CB 0	REV 08	750-040257	PROTOXCLEI	750-040257
CB 1	REV 08	750-040257	PROTOXCLEI	750-040257
SFB 0	REV 06	711-032385	PROTOXCLEI	711-032385
SFB 1	REV 07	711-032385	PROTOXCLEI	711-032385
SFB 2	REV 07	711-032385	PROTOXCLEI	711-032385
SFB 3	REV 07	711-032385	PROTOXCLEI	711-032385
SFB 4	REV 07	711-032385	PROTOXCLEI	711-032385
SFB 5	REV 07	711-032385	PROTOXCLEI	711-0323856
SFB 6	REV 07	711-032385	PROTOXCLEI	711-044170
SFB 7	REV 07	711-032385	PROTOXCLEI	711-044170
FPC 0	REV 33	750-028467		MPC-3D-16XGE-SFPP
FPC 1	REV 21	750-033205		MX-MPC3-3D
MIC 0	REV 03	750-033307	PROTOXCLEI	MIC3-3D-10XGE-SFPP
MIC 1	REV 03	750-033307	PROTOXCLEI	MIC3-3D-10XGE-SFPP
FPC 8	REV 22	750-031089	COUIBAYBAA	MX-MPC2-3D
MIC 0	REV 26	750-028392	COUIA15BAA	MIC-3D-20GE-SFP
MIC 1	REV 26	750-028387	COUIA16BAA	MIC-3D-4XGE-XFP
FPC 9	REV 11	750-036284	CMUIACGBAA	MPCE-3D-16XGE-SFPP
ADC 0	REV 05	750-043596	PROTOXCLEI	750-043596
ADC 1	REV 01	750-043596	PROTOXCLEI	750-043596
ADC 8	REV 01	750-043596	PROTOXCLEI	750-043596
ADC 9	REV 02	750-043596	PROTOXCLEI	750-043596
Fan Tray 0	REV 2A	760-046960		
Fan Tray 1	REV 2A	760-046960		
Fan Tray 2	REV 2A	760-046960		
Fan Tray 3	REV 2A	760-046960		

### show chassis hardware (MX2020 Router)

user@host > show chassis hardware

Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			JN11E2227AFJ	MX2020
Midplane	REV 27	750-040240	ABAB9384	Lower Power Midplane
Midplane 1	REV 04	711-032386	ABAB9386	Upper Backplane
PMP 1	REV 05	711-032428	ACAJ1579	Upper Power Midplane
PMP 0	REV 04	711-032426	ACAJ1524	Lower Power Midplane
FPM Board	REV 06	760-040242	ABBT8837	Front Panel Display
PSM 0	REV 01	740-045050	1E022240056	DC 52V Power Supply
Module				
PSM 1	REV 01	740-045050	1E022240054	DC 52V Power Supply
Module				
PSM 2	REV 01	740-045050	1E02224005H	DC 52V Power Supply
Module				
PSM 3	REV 01	740-045050	1E022240053	DC 52V Power Supply
Module				
PSM 4	REV 01	740-045050	1E02224004K	DC 52V Power Supply
Module				
PSM 7	REV 01	740-045050	1E02224006W	DC 52V Power Supply
Module				
PSM 8	REV 01	740-045050	1E022240062	DC 52V Power Supply
Module				
PSM 9	REV 01	740-045050	1E02224005B	DC 52V Power Supply
Module				
PSM 10	REV 01	740-045050	1E02224005A	DC 52V Power Supply
Module				
PSM 11	REV 01	740-045050	1E022240052	DC 52V Power Supply



Module				
PSM 12	REV 01	740-045050	1E022240051	DC 52V Power Supply
Module				
PSM 13	REV 01	740-045050	1E022240058	DC 52V Power Supply
Module				
PSM 14	REV 01	740-045050	1E02224004L	DC 52V Power Supply
Module				
PSM 15	REV 01	740-045050	1E02224005M	DC 52V Power Supply
Module				
PSM 16	REV 01	740-045050	1E02224006S	DC 52V Power Supply
Module				
PSM 17	REV 01	740-045050	1E02224005Z	DC 52V Power Supply
Module				
PDM 0	REV 01	740-045234	1E012150033	DC Power Dist Module
PDM 1	REV 01	740-045234	1E012150027	DC Power Dist Module
PDM 2	REV 01	740-045234	1E012150028	DC Power Dist Module
PDM 3	REV 01	740-045234	1E012150045	DC Power Dist Module
Routing Engine 0	REV 02	740-041821	9009089704	RE-S-1800x4
Routing Engine 1	REV 02	740-041821	9009094138	RE-S-1800x4
CB 0	REV 14	750-040257	CAAF8430	Control Board
CB 1	REV 08	750-040257	CAAB3482	Control Board
SPMB 0	REV 01	711-041855	ZS2290	PMB Board
SPMB 1	REV 02	711-041855	CAA6141	PMB Board
SFB 0	REV 03	711-044466	ABBV6789	Switch Fabric Board
SFB 1	REV 05	711-044466	ABBX5666	Switch Fabric Board
SFB 2	REV 05	711-044466	ABBX5678	Switch Fabric Board
SFB 3	REV 05	711-044466	ABBX5687	Switch Fabric Board
SFB 4	REV 05	711-044466	ABBX5609	Switch Fabric Board
SFB 5	REV 05	711-044466	ABBX5675	Switch Fabric Board
SFB 6	REV 03	711-044466	ABBV6805	Switch Fabric Board
SFB 7	REV 05	711-044466	ABBX5701	Switch Fabric Board
FPC 0	REV 30	750-028467	ABBN0284	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN0507	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E00990	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E04357	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01327	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E04375	SFP+-10G-USR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E02760	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E02904	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E03963	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E00756	SFP+-10G-USR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E04418	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E01077	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E01128	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11F01253	SFP+-10G-USR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E01140	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11F01626	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E01075	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E01177	SFP+-10G-USR
FPC 1	REV 30	750-028467	ABBN0208	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABB11084	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E04745	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11F01570	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E04388	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11F01439	SFP+-10G-USR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+



Xcvr 0	REV 01	740-030658	B11E04739	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11F01869	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01675	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11F01901	SFP+-10G-USR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11F01346	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11F01288	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01824	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E04312	SFP+-10G-USR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E02811	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E03847	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01495	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11F01265	SFP+-10G-USR
FPC 2	REV 30	750-028467	ZM5111	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ZP6607	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LJA	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80MFZ	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80NKL	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80KF4	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80FBJ	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80MM2	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80LJV	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80NXV	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80N1H	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80NLS	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80FL5	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80NL9	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80NG2	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80KDU	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80MG1	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80MM0	SFP+-10G-SR
FPC 3	REV 30	750-028467	ABBN0302	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN0495	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11F01581	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E01176	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01251	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E02752	SFP+-10G-USR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E00786	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E01020	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E01023	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E02819	SFP+-10G-USR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E02812	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11D04437	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01279	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11F01333	SFP+-10G-USR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E00978	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E01018	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01784	SFP+-10G-USR
Xcvr 3	REV 01	740-031980	AK80NKP	SFP+-10G-SR
FPC 4	REV 30	750-028467	ABBN0308	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBJ1095	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+



Xcvr 0	REV 01	740-030658	B11E04305	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E01147	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E01195	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11F01743	SFP+-10G-USR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11F01892	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E02880	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E00725	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E01057	SFP+-10G-USR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E02816	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11C04501	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E02764	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E00789	SFP+-10G-USR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11F01250	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E02847	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E00787	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E03803	SFP+-10G-USR
FPC 5	REV 30	750-028467	ABBN0316	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABB11082	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	B11K00523	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11K01848	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11K01865	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11K00540	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	B11K00422	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11K00428	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11K00423	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11K01855	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	B11K01847	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11K00526	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11K00529	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11K00525	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	B11K00425	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11K00530	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11K01851	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11K00528	SFP+-10G-SR
FPC 6	REV 32	750-028467	ABBN6832	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBK6534	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80MB4	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80FQ6	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80N1F	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80NLQ	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80KDR	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80FGJ	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80N5G	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80KD8	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LET	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80N1X	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80NRF	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80NL2	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80N3D	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80MRB	SFP+-10G-SR



Xcvr 2	REV 01	740-031980	AK80LEQ	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80LER	SFP+-10G-SR
FPC 7	REV 32	750-028467	ABBN6811	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN7288	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80NK8	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80LJG	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80LBU	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80N21	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LEU	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80NLM	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80NL6	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80LES	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LEN	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80ME0	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80LMG	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80MM1	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80MG7	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80KF9	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80NRQ	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80NLE	SFP+-10G-SR
FPC 8	REV 23	750-028467	YN2977	MPC 3D 16x 10GE
CPU	REV 10	711-029089	YP1856	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	183363A00875	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	183363A00851	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	183363A00772	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	183363A00882	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	183363A00735	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	183363A00169	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	183363A00726	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	183363A00077	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	183363A00168	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	183363A00676	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	183363A00732	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	183363A00091	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	183363A00725	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	183363A00642	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	183363A00871	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	183363A00853	SFP+-10G-SR
FPC 9	REV 32	750-028467	ABBN6798	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBK6556	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	9ZDZ06A00055	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	183363A00239	SFP+-10G-SR
Xcvr 2	REV 01	740-021308	AD0915E003K	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	AD0915E003A	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80MRC	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80NL5	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80NKN	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80N3U	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80N1T	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AJ808DJ	SFP+-10G-SR



Xcvr 2	REV 01	740-031980	AK80NG4	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80FND	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80FKQ	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80NLT	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80NKR	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80LKM	SFP+-10G-SR
FPC 10	REV 32	750-028467	ABBN6813	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBK6542	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80NA3	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80NLF	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80MRH	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80KE4	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	973152A00030	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80L9H	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80ME8	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80NLR	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80NG1	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80MCA	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80LFC	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80LEM	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80N9X	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80LAC	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80LF2	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80N8T	SFP+-10G-SR
FPC 11	REV 30	750-028467	ABBN0281	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN0526	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11F01326	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E03973	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E00950	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E00674	SFP+-10G-USR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E00775	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E04461	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E01074	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E02821	SFP+-10G-USR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E04501	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E00757	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01623	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E01022	SFP+-10G-USR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E04359	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E02751	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E02736	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E01178	SFP+-10G-USR
FPC 12	REV 32	750-028467	ABBN6796	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN7259	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	B11K01856	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11K01853	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11K01863	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A02863	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02668	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02881	SFP+-10G-SR



Xcvr 2	REV 01	740-031980	163363A01671	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A02627	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02725	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02692	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02730	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A03081	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02736	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02568	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02747	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A02579	SFP+-10G-SR
FPC 13	REV 30	750-028467	ABBN0270	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBJ0966	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80NL1	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80NXW	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80KD2	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80FMD	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80NKQ	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80MGH	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80N38	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80NL7	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LEL	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80NKD	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80KCY	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80LHK	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80M5J	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80MBE	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80NLG	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80LFH	SFP+-10G-SR
FPC 14	REV 32	750-028467	ABBN6790	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBK6515	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LZM	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80MCC	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80KCM	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80KE0	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021310	C10F99155	SFP+-10G-LRM
Xcvr 1	REV 01	740-021310	C10F99049	SFP+-10G-LRM
Xcvr 2	REV 01	740-021310	C10F99128	SFP+-10G-LRM
Xcvr 3	REV 01	740-021310	C10F99169	SFP+-10G-LRM
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LF3	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02597	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A03060	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A03057	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LEX	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80FEU	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80FNM	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	AJQQQ5G	SFP+-10G-SR
FPC 15	REV 32	750-028467	ABBN6791	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN7289	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	B11K00424	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11K01849	SFP+-10G-SR



Xcvr 2	REV 01	740-031980	B11K01862	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11K01852	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	B11K00427	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11K00430	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11K01854	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11K00426	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	B11K00429	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11K01864	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11K01850	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11K00522	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E01144	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E00985	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E00796	SFP+-10G-USR
Xcvr 3	REV 01	740-031980	B11K01866	SFP+-10G-SR
FPC 16	REV 30	750-028467	ABBM4592	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN0465	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11F01435	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E01052	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01328	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11F01254	SFP+-10G-USR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E02738	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E02881	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01624	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E00889	SFP+-10G-USR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E02883	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E00681	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E04306	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E02813	SFP+-10G-USR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11F01801	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E02753	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E01156	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E04324	SFP+-10G-USR
FPC 17	REV 32	750-028467	ABBN6810	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN7237	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02638	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02082	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A01674	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A03058	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A03048	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02729	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02566	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A02567	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02878	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02739	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A01959	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A02660	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02731	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02588	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02673	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A02654	SFP+-10G-SR



FPC 18	REV 30	750-028467	ABBM4739	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN0487	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02569	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02886	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A03082	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	133363A00297	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02726	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A03050	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02884	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A03076	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02581	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02873	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02582	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A03083	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031981	UL70BU6	SFP+-10G-LR
Xcvr 1	REV 01	740-031981	UL50QC6	SFP+-10G-LR
Xcvr 2	REV 01	740-031981	UL708N6	SFP+-10G-LR
Xcvr 3	REV 01	740-031981	UL603KK	SFP+-10G-LR
FPC 19	REV 32	750-028467	ABBN6827	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBK6508	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A01688	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A01724	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A01773	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A02593	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A03061	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A03056	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02669	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A03070	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02572	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02697	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02585	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A03052	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02591	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02649	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02577	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A02698	SFP+-10G-SR
ADC 0	REV 13	750-043596	ABBX5561	Adapter Card
ADC 1	REV 13	750-043596	ABBX5546	Adapter Card
ADC 2	REV 13	750-043596	ABBX5535	Adapter Card
ADC 3	REV 13	750-043596	ABBX5552	Adapter Card
ADC 4	REV 13	750-043596	ABBX5581	Adapter Card
ADC 5	REV 13	750-043596	ABBX5545	Adapter Card
ADC 6	REV 13	750-043596	ABBX5554	Adapter Card
ADC 7	REV 07	750-043596	ABBV7194	Adapter Card
ADC 8	REV 07	750-043596	ABBV7251	Adapter Card
ADC 9	REV 07	750-043596	ABBV7202	Adapter Card
ADC 10	REV 13	750-043596	ABBX5538	Adapter Card
ADC 11	REV 13	750-043596	ABBX5566	Adapter Card
ADC 12	REV 13	750-043596	ABBX5542	Adapter Card
ADC 13	REV 13	750-043596	ABBX5539	Adapter Card
ADC 14	REV 13	750-043596	ABBX5555	Adapter Card
ADC 15	REV 13	750-043596	ABBX5557	Adapter Card
ADC 16	REV 13	750-043596	ABBX5536	Adapter Card



ADC 17	REV 13	750-043596	ABBX5559	Adapter Card
ADC 18	REV 13	750-043596	ABBX5537	Adapter Card
ADC 19	REV 11	750-043596	ABBW5685	Adapter Card
Fan Tray 0	REV 2A	760-046960	ACAY0030	172mm FanTray - 6 Fans
Fan Tray 1	REV 2A	760-046960	ACAY0039	172mm FanTray - 6 Fans
Fan Tray 2	REV 2A	760-046960	ACAY0033	172mm FanTray - 6 Fans
Fan Tray 3	REV 2A	760-046960	ACAY0062	172mm FanTray - 6 Fans

#### show chassis hardware detail (MX2020 Router)

user@host> show chassis hardware detail

Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			JN11E2227AFJ	MX2020
Midplane	REV 27	750-040240	ABAB9384	Lower Power Midplane
Midplane 1	REV 04	711-032386	ABAB9386	Upper Backplane
PMP 1	REV 05	711-032428	ACAJ1821	Upper Power Midplane
PMP 0	REV 04	711-032426	ACAJ1524	Lower Power Midplane
FPM Board	REV 06	760-040242	ABBT8837	Front Panel Display
PSM 0	REV 01	740-045050	1E02224006G	DC 52V Power Supply
Module				
PSM 1	REV 01	740-045050	1E022240053	DC 52V Power Supply
Module				
PSM 2	REV 01	740-045050	1E02224004K	DC 52V Power Supply
Module				
PSM 3	REV 01	740-045050	1E022240056	DC 52V Power Supply
Module				
PSM 4	REV 01	740-045050	1E022240054	DC 52V Power Supply
Module				
PSM 5	REV 01	740-045050	1E02224005H	DC 52V Power Supply
Module				
PSM 6	REV 01	740-045050	1E02224006S	DC 52V Power Supply
Module				
PSM 7	REV 01	740-045050	1E02224005M	DC 52V Power Supply
Module				
PSM 8	REV 01	740-045050	1E022240062	DC 52V Power Supply
Module				
PSM 9	REV 03	740-045050	1EDB2350095	DC 52V Power Supply
Module				
PSM 10	REV 03	740-045050	1EDB235009L	DC 52V Power Supply
Module				
PSM 11	REV 03	740-045050	1EDB2350092	DC 52V Power Supply
Module				
PSM 12	REV 03	740-045050	1EDB23500AT	DC 52V Power Supply
Module				
PSM 13	REV 03	740-045050	1EDB2350094	DC 52V Power Supply
Module				
PSM 15	REV 03	740-045050	1EDB235008X	DC 52V Power Supply
Module				
PDM 0	REV 01	740-045234	1E012150033	DC Power Dist Module
PDM 1	REV 01	740-045234	1E012150027	DC Power Dist Module
PDM 2	REV 01	740-045234	1E262250072	DC Power Dist Module
Routing Engine 0	REV 02	740-041821	9009094138	RE-S-1800x4
ad0 3998 MB	Virtium - TuffDisk		VCF3 20110825A021D0000064	Compact Flash
ad1 30533 MB	UGB94ARF32H0S3-KC		UNIGEN-499551-000347	Disk 1
usb0 (addr 1)	EHCI root hub 0		Intel	uhub0
usb0 (addr 2)	product 0x0020 32		vendor 0x8087	uhub1
DIMM 0	SGU04G72H1BD2SA-BB DIE REV-52 PCB REV-54 MFR ID-ce80			
DIMM 1	SGU04G72H1BD2SA-BB DIE REV-52 PCB REV-54 MFR ID-ce80			
DIMM 2	SGU04G72H1BD2SA-BB DIE REV-52 PCB REV-54 MFR ID-ce80			
DIMM 3	SGU04G72H1BD2SA-BB DIE REV-52 PCB REV-54 MFR ID-ce80			
Routing Engine 1	REV 02	740-041821	9009089709	RE-S-1800x4
ad0 3831 MB	UGB30SFA4000T1		SFA4000T1 00000113	Compact Flash



ad1	30533 MB	UGB94ARF32H0S3-KC	UNIGEN-478612-001044	Disk 1	
CB 0		REV 08	750-040257	CAAB3482	Control Board
CB 1		REV 04	750-040257	ZT2864	Control Board
SPMB 0		REV 02	711-041855	CAAA6141	PMB Board
SPMB 1		REV 01	711-041855	ZS2275	PMB Board
SFB 0		REV 05	711-044466	ABBT2161	Switch Fabric Board
SFB 1		REV 05	711-044466	ABBT2159	Switch Fabric Board
SFB 2		REV 05	711-044466	ABBX3718	Switch Fabric Board
SFB 3		REV 05	711-044466	ABBT2152	Switch Fabric Board
SFB 4		REV 05	711-044466	ABBT2160	Switch Fabric Board
SFB 5		REV 05	711-044466	ABBT2145	Switch Fabric Board
SFB 6		REV 05	711-044466	ABBT2150	Switch Fabric Board
SFB 7		REV 05	711-044466	ABBT2163	Switch Fabric Board
FPC 0		REV 30	750-028467	ABBN0284	MPC 3D 16x 10GE
CPU		REV 10	711-029089	ABBN0507	AMPC PMB
PIC 0			BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0		REV 01	740-030658	B11E00990	SFP+-10G-USR
Xcvr 1		REV 01	740-030658	B11E04357	SFP+-10G-USR
Xcvr 2		REV 01	740-030658	B11F01327	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E04375		SFP+-10G-USR
PIC 1			BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0		REV 01	740-030658	B11E02760	SFP+-10G-USR
Xcvr 1		REV 01	740-030658	B11E02904	SFP+-10G-USR
Xcvr 2		REV 01	740-030658	B11E03963	SFP+-10G-USR
Xcvr 3		REV 01	740-030658	B11E00756	SFP+-10G-USR
PIC 2			BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0		REV 01	740-030658	B11E04418	SFP+-10G-USR
Xcvr 1		REV 01	740-030658	B11E01077	SFP+-10G-USR
Xcvr 2		REV 01	740-030658	B11E01128	SFP+-10G-USR
Xcvr 3		REV 01	740-030658	B11F01253	SFP+-10G-USR
PIC 3			BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0		REV 01	740-030658	B11E01140	SFP+-10G-USR
Xcvr 1		REV 01	740-030658	B11F01626	SFP+-10G-USR
Xcvr 2		REV 01	740-030658	B11E01075	SFP+-10G-USR
Xcvr 3		REV 01	740-030658	B11E01177	SFP+-10G-USR
FPC 1		REV 30	750-028467	ABBN0308	MPC 3D 16x 10GE
CPU		REV 10	711-029089	ABBJ1095	AMPC PMB
PIC 0			BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0		REV 01	740-030658	B11E04305	SFP+-10G-USR
Xcvr 1		REV 01	740-030658	B11E01147	SFP+-10G-USR
Xcvr 2		REV 01	740-030658	B11E01195	SFP+-10G-USR
Xcvr 3		REV 01	740-030658	B11F01743	SFP+-10G-USR
PIC 1			BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0		REV 01	740-030658	B11F01892	SFP+-10G-USR
Xcvr 1		REV 01	740-030658	B11E02880	SFP+-10G-USR
Xcvr 2		REV 01	740-030658	B11E00725	SFP+-10G-USR
Xcvr 3		REV 01	740-030658	B11E01057	SFP+-10G-USR
PIC 2			BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0		REV 01	740-030658	B11E02816	SFP+-10G-USR
Xcvr 1		REV 01	740-030658	B11C04501	SFP+-10G-USR
Xcvr 2		REV 01	740-030658	B11E02764	SFP+-10G-USR
Xcvr 3		REV 01	740-030658	B11E00789	SFP+-10G-USR
PIC 3			BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0		REV 01	740-030658	B11F01250	SFP+-10G-USR
Xcvr 1		REV 01	740-030658	B11E02847	SFP+-10G-USR
Xcvr 2		REV 01	740-030658	B11E00787	SFP+-10G-USR
Xcvr 3		REV 01	740-030658	B11E03803	SFP+-10G-USR
FPC 2		REV 30	750-028467	ABBN0316	MPC 3D 16x 10GE
CPU		REV 10	711-029089	ABBJ1082	AMPC PMB
PIC 0			BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0		REV 01	740-031980	B11K00523	SFP+-10G-SR



Xcvr 1	REV 01	740-031980	B11K01848	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11K01865	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11K00540	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	B11K00422	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11K00428	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11K00423	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11K01855	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	B11K01847	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11K00526	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11K00529	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11K00525	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	B11K00425	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11K00530	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11K01851	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11K00528	SFP+-10G-SR
FPC 3	REV 32	750-028467	ABBN6832	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBK6534	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80MB4	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80FQ6	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80N1F	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80NLQ	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80KDR	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80FGJ	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80N5G	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80KD8	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LET	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80N1X	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80NRF	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80NL2	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80N3D	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80MRB	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80LEQ	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80LER	SFP+-10G-SR
FPC 4	REV 32	750-028467	ABBN6811	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN7288	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80NK8	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80LJG	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80LBU	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80N21	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LEU	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80NLM	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80NL6	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80LES	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LEN	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80ME0	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80LMG	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80MM1	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80MG7	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80KF9	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80NRQ	SFP+-10G-SR



Xcvr 3	REV 01	740-031980	AK80NLE	SFP+-10G-SR
FPC 5	REV 32	750-028467	ABBN6791	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN7289	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	B11K00424	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11K01849	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11K01862	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11K01852	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP
Xcvr 0	REV 01	740-031980	B11K00427	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11K00430	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11K01854	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11K00426	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	B11K00429	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11K01864	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11K01850	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11K00522	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E01144	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E00985	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E00796	SFP+-10G-USR
Xcvr 3	REV 01	740-031980	B11K01866	SFP+-10G-SR
FPC 6	REV 30	750-028467	ABBM4592	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN0465	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11F01435	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E01052	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01328	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11F01254	SFP+-10G-USR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E02738	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E02881	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01624	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E00889	SFP+-10G-USR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E02883	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E00681	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E04306	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E02813	SFP+-10G-USR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11F01801	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E02753	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E01156	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E04324	SFP+-10G-USR
FPC 7	REV 32	750-028467	ABBN6810	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN7237	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A03058	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02082	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A01674	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A02638	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A03048	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02729	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02566	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A02567	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02878	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02739	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A01959	SFP+-10G-SR



Xcvr 3	REV 01	740-031980	163363A02660	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02731	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02588	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02673	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A02654	SFP+-10G-SR
FPC 8	REV 30	750-028467	ABBM4739	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN0487	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02569	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02886	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A03082	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	133363A00297	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02726	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A03050	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02884	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A03076	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02581	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02873	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02582	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A03083	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031981	UL70BU6	SFP+-10G-LR
Xcvr 1	REV 01	740-031981	UL50QC6	SFP+-10G-LR
Xcvr 2	REV 01	740-031981	UL708N6	SFP+-10G-LR
Xcvr 3	REV 01	740-031981	UL603KK	SFP+-10G-LR
FPC 9	REV 32	750-028467	ABBN6827	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBK6508	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A01688	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A01724	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A01773	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A02593	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A03061	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A03056	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02669	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A03070	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02572	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02697	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02585	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A03052	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02591	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02649	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02577	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A02698	SFP+-10G-SR
FPC 10	REV 30	750-028467	ABBN0302	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN0495	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11F01581	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E01176	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01251	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E02752	SFP+-10G-USR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E00786	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E01020	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E01023	SFP+-10G-USR



Xcvr 3	REV 01	740-030658	B11E02819	SFP+-10G-USR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E02812	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11D04437	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01279	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11F01333	SFP+-10G-USR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E00978	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E01018	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01784	SFP+-10G-USR
Xcvr 3	REV 01	740-031980	AK80NKP	SFP+-10G-SR
FPC 11	REV 32	750-028467	ABBN6790	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBK6515	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LZM	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80MCC	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80KCM	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80KE0	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021310	C10F99155	SFP+-10G-LRM
Xcvr 1	REV 01	740-021310	C10F99049	SFP+-10G-LRM
Xcvr 2	REV 01	740-021310	C10F99128	SFP+-10G-LRM
Xcvr 3	REV 01	740-021310	C10F99169	SFP+-10G-LRM
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LF3	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02597	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A03060	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A03057	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LEX	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80FEU	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80FNM	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	AJQQQ5G	SFP+-10G-SR
FPC 12	REV 30	750-028467	ZM5111	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ZP6607	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LJA	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80MFZ	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80NKL	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80KF4	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80FBJ	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80MM2	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80LJV	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80NXV	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80N1H	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80NLS	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80FL5	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80NL9	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80NG2	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80KDU	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80MG1	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80MM0	SFP+-10G-SR
FPC 13	REV 30	750-028467	ABBN0208	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABB11084	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E04745	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11F01570	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E04388	SFP+-10G-USR



Xcvr 3	REV 01	740-030658	B11F01439	SFP+-10G-USR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E04739	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11F01869	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01675	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11F01901	SFP+-10G-USR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11F01346	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11F01288	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01824	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E04312	SFP+-10G-USR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E02811	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E03847	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01495	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11F01265	SFP+-10G-USR
FPC 14	REV 23	750-028467	YN2977	MPC 3D 16x 10GE
CPU	REV 10	711-029089	YP1856	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	183363A00875	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	183363A00851	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	183363A00772	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	183363A00882	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	183363A00735	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	183363A00169	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	183363A00726	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	183363A00077	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	183363A00168	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	183363A00676	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	183363A00732	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	183363A00091	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	183363A00725	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	183363A00642	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	183363A00871	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	183363A00853	SFP+-10G-SR
FPC 15	REV 32	750-028467	ABBN6798	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN6556	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	9ZDZ06A00055	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	183363A00239	SFP+-10G-SR
Xcvr 2	REV 01	740-021308	AD0915E003K	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	AD0915E003A	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80MRC	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80NL5	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80NKN	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80N3U	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80N1T	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AJ808DJ	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80NG4	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80FND	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80FKQ	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80NLT	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80NKR	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80LKM	SFP+-10G-SR
FPC 16	REV 30	750-028467	ABBN0270	MPC 3D 16x 10GE



CPU	REV 10	711-029089	ABB0966	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80NL1	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80NXW	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80KD2	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80FMD	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80NKQ	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80MGH	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80N38	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80NL7	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80M5J	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80NKD	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80KCY	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80LHK	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LEL	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80MBE	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80NLG	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80LFH	SFP+-10G-SR
FPC 17	REV 32	750-028467	ABBN6796	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN7259	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	B11K01856	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11K01853	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11K01863	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A02863	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02668	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02881	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A01671	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A02627	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02725	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02692	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02730	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A03081	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	163363A02736	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	163363A02568	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	163363A02747	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	163363A02579	SFP+-10G-SR
FPC 18	REV 30	750-028467	ABBN0281	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBN0526	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11F01326	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E03973	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E00950	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E00674	SFP+-10G-USR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E00775	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E04461	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E01074	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E02821	SFP+-10G-USR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-030658	B11E04501	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E00757	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11F01623	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E01022	SFP+-10G-USR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+



Xcvr 0	REV 01	740-030658	B11E04359	SFP+-10G-USR
Xcvr 1	REV 01	740-030658	B11E02751	SFP+-10G-USR
Xcvr 2	REV 01	740-030658	B11E02736	SFP+-10G-USR
Xcvr 3	REV 01	740-030658	B11E01178	SFP+-10G-USR
FPC 19	REV 32	750-028467	ABBN6813	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ABBK6542	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80NA3	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80NLF	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80MRH	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80KE4	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	973152A00030	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80L9H	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80ME8	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80NLR	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80NG1	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80MCA	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80LFC	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80LEM	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80N9X	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AK80LAC	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80LFC	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AK80N8T	SFP+-10G-SR
ADC 0	REV 13	750-043596	ABBX5561	Adapter Card
ADC 1	REV 13	750-043596	ABBX5546	Adapter Card
ADC 2	REV 13	750-043596	ABBX5535	Adapter Card
ADC 3	REV 13	750-043596	ABBX5552	Adapter Card
ADC 4	REV 13	750-043596	ABBX5581	Adapter Card
ADC 5	REV 13	750-043596	ABBX5545	Adapter Card
ADC 6	REV 13	750-043596	ABBX5554	Adapter Card
ADC 7	REV 07	750-043596	ABBV7194	Adapter Card
ADC 8	REV 07	750-043596	ABBV7251	Adapter Card
ADC 9	REV 07	750-043596	ABBV7202	Adapter Card
ADC 10	REV 13	750-043596	ABBX5579	Adapter Card
ADC 11	REV 13	750-043596	ABBX5548	Adapter Card
ADC 12	REV 13	750-043596	ABBX5575	Adapter Card
ADC 13	REV 13	750-043596	ABBX5539	Adapter Card
ADC 14	REV 13	750-043596	ABBX5555	Adapter Card
ADC 15	REV 13	750-043596	ABBX5557	Adapter Card
ADC 16	REV 13	750-043596	ABBX5536	Adapter Card
ADC 17	REV 13	750-043596	ABBX5559	Adapter Card
ADC 18	REV 13	750-043596	ABBX5537	Adapter Card
ADC 19	REV 11	750-043596	ABBW5685	Adapter Card
Fan Tray 0	REV 04	760-046960	ACAY0090	172mm FanTray - 6 Fans
Fan Tray 1	REV 04	760-046960	ACAY0088	172mm FanTray - 6 Fans
Fan Tray 2	REV 04	760-046960	ACAY0089	172mm FanTray - 6 Fans
Fan Tray 3	REV 04	760-046960	ACAY0108	172mm FanTray - 6 Fans

show chassis hardware  
models (MX2020  
Router)

user@host > show chassis hardware models

Hardware inventory:

Item	Version	Part number	Serial number	FRU model number
Midplane	REV 27	750-040240	ABAB9384	750-040240
FPM Board	REV 06	760-040242	ABBT8837	760-040242
PSM 0	REV 01	740-045050	1E02224006G	MX2000-PSM-HC-DC-S-A
PSM 1	REV 01	740-045050	1E022240053	MX2000-PSM-HC-DC-S-A
PSM 2	REV 01	740-045050	1E02224004K	MX2000-PSM-HC-DC-S-A
PSM 3	REV 01	740-045050	1E022240056	MX2000-PSM-HC-DC-S-A
PSM 4	REV 01	740-045050	1E022240054	MX2000-PSM-HC-DC-S-A



PSM 5	REV 01	740-045050	1E02224005H	MX2000-PSM-HC-DC-S-A
PSM 6	REV 01	740-045050	1E02224006S	MX2000-PSM-HC-DC-S-A
PSM 7	REV 01	740-045050	1E02224005M	MX2000-PSM-HC-DC-S-A
PSM 8	REV 01	740-045050	1E022240062	MX2000-PSM-HC-DC-S-A
PSM 9	REV 03	740-045050	1EDB2350095	MX2000-PSM-DC-S-A
PSM 10	REV 03	740-045050	1EDB235009L	MX2000-PSM-DC-S-A
PSM 11	REV 03	740-045050	1EDB2350092	MX2000-PSM-DC-S-A
PSM 12	REV 03	740-045050	1EDB23500AT	MX2000-PSM-DC-S-A
PSM 13	REV 03	740-045050	1EDB2350094	MX2000-PSM-DC-S-A
PSM 15	REV 03	740-045050	1EDB235008X	MX2000-PSM-DC-S-A
PDM 0	REV 01	740-045234	1E012150033	
PDM 1	REV 01	740-045234	1E012150027	
PDM 2	REV 01	740-045234	1E262250072	MX2000-PDM-DC-S-A
Routing Engine 0	REV 02	740-041821	9009094138	RE-S-1800X4-16G-S
Routing Engine 1	REV 02	740-041821	9009089709	RE-S-1800X4-16G-S
CB 0	REV 08	750-040257	CAAB3482	750-040257
CB 1	REV 04	750-040257	ZT2864	750-040257
SFB 0	REV 05	711-044466	ABBT2161	MX2000-SFB-S
SFB 1	REV 05	711-044466	ABBT2159	MX2000-SFB-S
SFB 2	REV 05	711-044466	ABBX3718	MX2000-SFB-S
SFB 4	REV 05	711-044466	ABBT2160	MX2000-SFB-S
SFB 5	REV 05	711-044466	ABBT2145	MX2000-SFB-S
SFB 7	REV 05	711-044466	ABBT2163	MX2000-SFB-S
FPC 0	REV 30	750-028467	ABBN0284	MPC-3D-16XGE-SFPP
FPC 1	REV 30	750-028467	ABBN0308	MPC-3D-16XGE-SFPP
FPC 2	REV 30	750-028467	ABBN0316	MPC-3D-16XGE-SFPP
FPC 3	REV 32	750-028467	ABBN6832	MPC-3D-16XGE-SFPP
FPC 4	REV 32	750-028467	ABBN6811	MPC-3D-16XGE-SFPP
FPC 5	REV 32	750-028467	ABBN6791	MPC-3D-16XGE-SFPP
FPC 6	REV 30	750-028467	ABBM4592	MPC-3D-16XGE-SFPP
FPC 7	REV 32	750-028467	ABBN6810	MPC-3D-16XGE-SFPP
FPC 8	REV 30	750-028467	ABBM4739	MPC-3D-16XGE-SFPP
FPC 9	REV 32	750-028467	ABBN6827	MPC-3D-16XGE-SFPP
FPC 10	REV 30	750-028467	ABBN0302	MPC-3D-16XGE-SFPP
FPC 11	REV 32	750-028467	ABBN6790	MPC-3D-16XGE-SFPP
FPC 12	REV 30	750-028467	ZM5111	MPC-3D-16XGE-SFPP
FPC 13	REV 30	750-028467	ABBN0208	MPC-3D-16XGE-SFPP
FPC 14	REV 23	750-028467	YN2977	MPC-3D-16XGE-SFPP
FPC 15	REV 32	750-028467	ABBN6798	MPC-3D-16XGE-SFPP
FPC 16	REV 30	750-028467	ABBN0270	MPC-3D-16XGE-SFPP
FPC 17	REV 32	750-028467	ABBN6796	MPC-3D-16XGE-SFPP
FPC 18	REV 30	750-028467	ABBN0281	MPC-3D-16XGE-SFPP
FPC 19	REV 32	750-028467	ABBN6813	MPC-3D-16XGE-SFPP
ADC 0	REV 13	750-043596	ABBX5561	PROTO-ASSEMBLY
ADC 1	REV 13	750-043596	ABBX5546	PROTO-ASSEMBLY
ADC 2	REV 13	750-043596	ABBX5535	MX2000-LC-ADAPTER
ADC 3	REV 13	750-043596	ABBX5552	MX2000-LC-ADAPTER
ADC 4	REV 13	750-043596	ABBX5581	MX2000-LC-ADAPTER
ADC 5	REV 13	750-043596	ABBX5545	PROTO-ASSEMBLY
ADC 6	REV 13	750-043596	ABBX5554	PROTO-ASSEMBLY
ADC 7	REV 07	750-043596	ABBV7194	MX2000-LC-ADAPTER
ADC 8	REV 07	750-043596	ABBV7251	MX2000-LC-ADAPTER
ADC 9	REV 07	750-043596	ABBV7202	MX2000-LC-ADAPTER
ADC 10	REV 13	750-043596	ABBX5579	MX2000-LC-ADAPTER
ADC 12	REV 13	750-043596	ABBX5575	MX2000-LC-ADAPTER
ADC 13	REV 13	750-043596	ABBX5539	PROTO-ASSEMBLY
ADC 14	REV 13	750-043596	ABBX5555	PROTO-ASSEMBLY
ADC 15	REV 13	750-043596	ABBX5557	MX2000-LC-ADAPTER
ADC 16	REV 13	750-043596	ABBX5536	PROTO-ASSEMBLY
ADC 17	REV 13	750-043596	ABBX5559	PROTO-ASSEMBLY
ADC 18	REV 13	750-043596	ABBX5537	PROTO-ASSEMBLY



ADC 19	REV 11	750-043596	ABBW5685	PROTO-ASSEMBLY
Fan Tray 0	REV 04	760-046960	ACAY0090	
Fan Tray 1	REV 04	760-046960	ACAY0088	
Fan Tray 2	REV 04	760-046960	ACAY0089	
Fan Tray 3	REV 04	760-046960	ACAY0108	

### show chassis hardware clei-models (MX2020 Router)

user@ host > show chassis hardware clei-models

Hardware inventory:

Item	Version	Part number	CLEI code	FRU model number
Midplane	REV 27	750-040240	PROTOXCLEI	750-040240
FPM Board	REV 06	760-040242	PROTOXCLEI	760-040242
PSM 0	REV 01	740-045050	IPUPAJMKAA	MX2000-PSM-HC-DC-S-A
PSM 1	REV 01	740-045050	IPUPAJMKAA	MX2000-PSM-HC-DC-S-A
PSM 2	REV 01	740-045050	IPUPAJMKAA	MX2000-PSM-HC-DC-S-A
PSM 3	REV 01	740-045050	IPUPAJMKAA	MX2000-PSM-HC-DC-S-A
PSM 4	REV 01	740-045050	IPUPAJMKAA	MX2000-PSM-HC-DC-S-A
PSM 5	REV 01	740-045050	IPUPAJMKAA	MX2000-PSM-HC-DC-S-A
PSM 6	REV 01	740-045050	IPUPAJMKAA	MX2000-PSM-HC-DC-S-A
PSM 7	REV 01	740-045050	IPUPAJMKAA	MX2000-PSM-HC-DC-S-A
PSM 8	REV 01	740-045050	IPUPAJMKAA	MX2000-PSM-HC-DC-S-A
PSM 9	REV 03	740-045050	IPUPAJMKAA	MX2000-PSM-DC-S-A
PSM 10	REV 03	740-045050	IPUPAJMKAA	MX2000-PSM-DC-S-A
PSM 11	REV 03	740-045050	IPUPAJMKAA	MX2000-PSM-DC-S-A
PSM 12	REV 03	740-045050	IPUPAJMKAA	MX2000-PSM-DC-S-A
PSM 13	REV 03	740-045050	IPUPAJMKAA	MX2000-PSM-DC-S-A
PSM 15	REV 03	740-045050	IPUPAJMKAA	MX2000-PSM-DC-S-A
PDM 0	REV 01	740-045234		
PDM 1	REV 01	740-045234		
PDM 2	REV 01	740-045234	IPUPAJSKAA	MX2000-PDM-DC-S-A
Routing Engine 0	REV 02	740-041821		RE-S-1800X4-16G-S
Routing Engine 1	REV 02	740-041821		RE-S-1800X4-16G-S
CB 0	REV 08	750-040257	PROTOXCLEI	750-040257
CB 1	REV 04	750-040257	PROTOXCLEI	750-040257
SFB 0	REV 05	711-044466	IPUCBA6CAA	MX2000-SFB-S
SFB 1	REV 05	711-044466	IPUCBA6CAA	MX2000-SFB-S
SFB 2	REV 05	711-044466	IPUCBA6CAA	MX2000-SFB-S
SFB 4	REV 05	711-044466	IPUCBA6CAA	MX2000-SFB-S
SFB 5	REV 05	711-044466	IPUCBA6CAA	MX2000-SFB-S
SFB 7	REV 05	711-044466	IPUCBA6CAA	MX2000-SFB-S
FPC 0	REV 30	750-028467		MPC-3D-16XGE-SFPP
FPC 1	REV 30	750-028467		MPC-3D-16XGE-SFPP
FPC 2	REV 30	750-028467		MPC-3D-16XGE-SFPP
FPC 3	REV 32	750-028467		MPC-3D-16XGE-SFPP
FPC 4	REV 32	750-028467		MPC-3D-16XGE-SFPP
FPC 5	REV 32	750-028467		MPC-3D-16XGE-SFPP
FPC 6	REV 30	750-028467		MPC-3D-16XGE-SFPP
FPC 7	REV 32	750-028467		MPC-3D-16XGE-SFPP
FPC 8	REV 30	750-028467		MPC-3D-16XGE-SFPP
FPC 9	REV 32	750-028467		MPC-3D-16XGE-SFPP
FPC 10	REV 30	750-028467		MPC-3D-16XGE-SFPP
FPC 11	REV 32	750-028467		MPC-3D-16XGE-SFPP
FPC 12	REV 30	750-028467		MPC-3D-16XGE-SFPP
FPC 13	REV 30	750-028467		MPC-3D-16XGE-SFPP
FPC 14	REV 23	750-028467		MPC-3D-16XGE-SFPP
FPC 15	REV 32	750-028467		MPC-3D-16XGE-SFPP
FPC 16	REV 30	750-028467		MPC-3D-16XGE-SFPP
FPC 17	REV 32	750-028467		MPC-3D-16XGE-SFPP
FPC 18	REV 30	750-028467		MPC-3D-16XGE-SFPP
FPC 19	REV 32	750-028467		MPC-3D-16XGE-SFPP
ADC 0	REV 13	750-043596	PROTOXCLEI	PROTO-ASSEMBLY
ADC 1	REV 13	750-043596	PROTOXCLEI	PROTO-ASSEMBLY



ADC 2	REV 13	750-043596	IPUCBA8CAA	MX2000-LC-ADAPTER
ADC 3	REV 13	750-043596	IPUCBA8CAA	MX2000-LC-ADAPTER
ADC 4	REV 13	750-043596	IPUCBA8CAA	MX2000-LC-ADAPTER
ADC 5	REV 13	750-043596	PROTOXCLEI	PROTO-ASSEMBLY
ADC 6	REV 13	750-043596	PROTOXCLEI	PROTO-ASSEMBLY
ADC 7	REV 07	750-043596	PROTOXCLEI	MX2000-LC-ADAPTER
ADC 8	REV 07	750-043596	PROTOXCLEI	MX2000-LC-ADAPTER
ADC 9	REV 07	750-043596	PROTOXCLEI	MX2000-LC-ADAPTER
ADC 10	REV 13	750-043596	IPUCBA8CAA	MX2000-LC-ADAPTER
ADC 12	REV 13	750-043596	IPUCBA8CAA	MX2000-LC-ADAPTER
ADC 13	REV 13	750-043596	PROTOXCLEI	PROTO-ASSEMBLY
ADC 14	REV 13	750-043596	PROTOXCLEI	PROTO-ASSEMBLY
ADC 15	REV 13	750-043596	IPUCBA8CAA	MX2000-LC-ADAPTER
ADC 16	REV 13	750-043596	PROTOXCLEI	PROTO-ASSEMBLY
ADC 17	REV 13	750-043596	PROTOXCLEI	PROTO-ASSEMBLY
ADC 18	REV 13	750-043596	PROTOXCLEI	PROTO-ASSEMBLY
ADC 19	REV 11	750-043596	PROTOXCLEI	PROTO-ASSEMBLY
Fan Tray 0	REV 04	760-046960		
Fan Tray 1	REV 04	760-046960		
Fan Tray 2	REV 04	760-046960		
Fan Tray 3	REV 04	760-046960		

#### show chassis hardware (MX Series routers with ATM MIC)

```
user@host> show chassis hardware
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis			JN115736EAF	MX240
Midplane	REV 07	760-021404	ABAA5038	MX240 Backplane
FPM Board	REV 03	760-021392	ABBA2758	Front Panel Display
PEM 0	Rev 01	740-022697	QCS0937C07K	PS 1.2-1.7kW; 100-240V
AC in				
PEM 1	Rev 01	740-022697	QCS0939C04X	PS 1.2-1.7kW; 100-240V
AC in				
PEM 2	Rev 01	740-022697	QCS0937C06B	PS 1.2-1.7kW; 100-240V
AC in				
PEM 3	Rev 01	740-022697	QCS0937C07U	PS 1.2-1.7kW; 100-240V
AC in				
Routing Engine 0	REV 12	740-013063	9009042291	RE-S-2000
Routing Engine 1	REV 12	740-013063	9009042266	RE-S-2000
CB 0	REV 06	710-021523	ABBC1435	MX SCB
CB 1	REV 06	710-021523	ABBC1497	MX SCB
FPC 2	REV 14	750-031088	YH8446	MPC Type 2 3D Q
CPU	REV 06	711-030884	YH9612	MPC PMB 2G
MIC 0				
MIC 1	REV 10	750-036132	ZP7062	2xOC12/8xOC3 CC-CE
PIC 2		BUILTIN	BUILTIN	2xOC12/8xOC3 CC-CE
Xcvr 0	NON-JNPR	23393-00492		UNKNOWN
Xcvr 1		NON-JNPR	23393-00500	UNKNOWN
Xcvr 2		NON-JNPR	23393-00912	UNKNOWN
Xcvr 3	REV 01	740-015638	22216-00575	Load SFP
Xcvr 4	REV 01	740-015638	24145-00110	Load SFP
Xcvr 5	REV 01	740-015638	24145-00016	Load SFP
Xcvr 6	REV 01	740-015638	24145-00175	Load SFP
Xcvr 7		NON-JNPR	23393-00627	UNKNOWN
QXM 0	REV 05	711-028408	YF4681	MPC QXM
QXM 1	REV 05	711-028408	YF4817	MPC QXM
Fan Tray 0	REV 01	710-021113	XL3645	MX240 Fan Tray

#### show chassis hardware

```
user@host> show chassis hardware
```

```
Hardware inventory:
```



(MX240, MX480,  
MX960 routers with  
Application Services  
Modular Line Card)

Item	Version	Part number	Serial number	Description
Chassis			JN1D969BAFA	MX960
Midplane	REV 03	710-013698	ACAA2362	MX960 Backplane
FPM Board	REV 03	710-014974	ZR0639	Front Panel Display
PDM	Rev 03	740-013110	QCS152250SX	Power Distribution Module
PEM 0	Rev 10	740-013683	QCS1512718W	DC Power Entry Module
PEM 1	Rev 10	740-013683	QCS1512702Y	DC Power Entry Module
Routing Engine 0	REV 15	740-013063	9012024667	RE-S-2000
Routing Engine 1	REV 15	740-013063	9012024649	RE-S-2000
CB 0	REV 14	750-031391	ZJ7749	Enhanced MX SCB
CB 1	REV 14	750-031391	ZJ7750	Enhanced MX SCB
CB 2	REV 14	750-031391	ZY9233	Enhanced MX SCB
FPC 0	REV 17	750-031089	YR7434	MPC Type 2 3D
CPU				
FPC 1	REV 11	750-037207	ZW9727	AS-MCC
CPU	REV 04	711-038173	ZW4817	AS-MCC-PMB
MIC 0	REV 01	750-037214	ZH3764	AS-MSC
PIC 0		BUILTIN	BUILTIN	AS-MSC
MIC 1	REV 01	711-028408	JZ9200	AS-MXC
PIC 2		BUILTIN	BUILTIN	AS-MXC
FPC 4	REV 30	750-028467	ABBN0232	MPC 3D 16x 10GE
CPU				
FPC 5	REV 04	750-037207	ZK9074	AS-MCC
CPU				
Fan Tray 0	REV 05	740-014971	VT5683	Fan Tray
Fan Tray 1	REV 05	740-014971	VT5684	Fan Tray

show chassis hardware  
extensive (MX240,  
MX480, MX960  
routers with

user@host> show chassis hardware extensive

```
ID: AS-MCC                                FRU Model Number: 750-037207
Board Information Record:
Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff I2C Hex Data:
```



Application Services  
Modular Line Card)

```

Address 0x00: 7f b0 02 ff 0b 37 01 0b 52 45 56 20 31 31 00 00
Address 0x10: 00 00 00 00 37 35 30 2d 30 33 37 32 30 37 00 00
Address 0x20: 53 2f 4e 20 5a 57 39 37 32 37 00 00 00 11 02 07
Address 0x30: dc ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x40: ff ff ff ff 01 50 52 4f 54 4f 58 43 4c 45 49 37
Address 0x50: 35 30 2d 30 33 37 32 30 37 00 00 00 00 00 00 00
Address 0x60: 00 00 00 00 00 00 31 31 00 ff ff ff ff ff ff ff
Address 0x70: ff ff ff 5e ff ff ff ff ff ff ff ff ff ff ff ff
CPU          REV 04    711-038173    ZW4817          AS-MCC-PMB
Jedec Code:  0x7fb0          EEPROM Version:  0x02
P/N:         711-038173      S/N:           S/N ZW4817
Assembly ID: 0x0b38          Assembly Version: 01.04
Date:        12-30-2011      Assembly Flags: 0x00
Version:     REV 04
ID: AS-MCC-PMB
Board Information Record:
Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff I2C Hex Data:
Address 0x00: 7f b0 02 ff 0b 38 01 04 52 45 56 20 30 34 00 00
Address 0x10: 00 00 00 00 37 31 31 2d 30 33 38 31 37 33 00 00
Address 0x20: 53 2f 4e 20 5a 57 34 38 31 37 00 00 00 1e 0c 07
Address 0x30: db ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x40: ff ff ff ff 00 50 52 4f 54 4f 58 43 4c 45 49 37
Address 0x50: 31 31 2d 30 33 38 31 37 33 00 00 00 00 00 00 00
Address 0x60: 00 00 00 00 00 00 30 34 00 ff ff ff ff ff ff ff
Address 0x70: ff ff ff 60 00 00 00 00 00 00 00 00 00 00 00 00
MIC 0          REV 01    750-037214    ZH3764          AS-MS
Jedec Code:  0x7fb0          EEPROM Version:  0x02
P/N:         750-037214      S/N:           S/N ZH3764
Assembly ID: 0x0a44          Assembly Version: 01.01
Date:        07-04-2011      Assembly Flags: 0x00
Version:     REV 01
ID: AS-MS
Board Information Record:
Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff I2C Hex Data:
Address 0x00: 7f b0 02 ff 0a 44 01 01 52 45 56 20 30 31 00 00
Address 0x10: 00 00 00 00 37 35 30 2d 30 33 37 32 31 34 00 00
Address 0x20: 53 2f 4e 20 5a 48 33 37 36 34 00 00 00 04 07 07
Address 0x30: db ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x40: ff ff ff ff 00 00 00 00 00 00 00 00 00 00 00 00
Address 0x50: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
Address 0x60: 00 00 00 00 00 00 00 00 ff ff ff ff ff ff ff ff
Address 0x70: ff ff ff f6 c0 03 e1 bc 00 00 00 00 00 00 00 00
PIC 0          BUILTIN    BUILTIN          AS-MS
FPC 4          REV 30    750-028467    ABBN0232        MPC 3D 16x 10GE
Jedec Code:  0x7fb0          EEPROM Version:  0x01

```

show chassis hardware  
(MPC4E 3D  
2CGE+8XGE and  
MPC4E 3D 32XGE

user@host&gt; show chassis hardware

Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			JN10FF57BAFB	MX480
Midplane	REV 05	750-047849	Good	MX480 Midplane



[MX240, MX480,  
MX960 Routers])

FPM Board	REV 02	710-017254	KG2066	Front Panel Display
PEM 0	Rev 03	740-017330	QCS081590BJ	PS 1.2-1.7kW; 100-240V
AC in				
PEM 1	Rev 03	740-017330	QCS0815908Z	PS 1.2-1.7kW; 100-240V
AC in				
PEM 2	Rev 03	740-029970	QCS1001U001	PS 1.4-2.52kW; 90-264V
AC in				
Routing Engine 0	REV 05	740-031116	9009089502	RE-S-1800x4
Routing Engine 1	REV 05	740-031116	9009089624	RE-S-1800x4
CB 0	REV 02	750-031391	YE8506	Enhanced MX SCB
CB 1	REV 14	750-031391	ZK8265	Enhanced MX SCB
FPC 2	REV 05	750-037358	ZT0638	MPC4E 3D 32XGE
CPU	REV 07	711-035209	ZK3187	HMPC PMB 2G
PIC 0		BUILTIN	BUILTIN	8X10GE SFPP
PIC 1		BUILTIN	BUILTIN	8X10GE SFPP
PIC 2		BUILTIN	BUILTIN	8X10GE SFPP
PIC 3		BUILTIN	BUILTIN	8X10GE SFPP
FPC 3	REV 06	750-037355	CAAB1144	MPC4E 3D 2CGE+8XGE
CPU	REV 08	711-035209	CAAB1278	HMPC PMB 2G
PIC 0		BUILTIN	BUILTIN	4x10GE SFPP
Xcvr 0	REV 01	740-031980	B11E01439	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11D05809	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	1X100GE CFP
Xcvr 0		NON-JNPR	D5418	UNKNOWN
PIC 2		BUILTIN	BUILTIN	4x10GE SFPP
PIC 3		BUILTIN	BUILTIN	1X100GE CFP
Xcvr 0		NON-JNPR	X12J00362	CFP-100G-SR10
FPC 4	REV 12.3.10	750-033205	YR9445	MPCE Type 3 3D
CPU				
Fan Tray				Enhanced Left Fan Tray

show chassis hardware  
(MPC4E 3D)

user@host&gt; show chassis hardware

Hardware inventory:

Item	Version	Part number	Serial number	Description
------	---------	-------------	---------------	-------------



## 2CGE+8XGE [MX2020 Routers])

Chassis			JN11E188CAFJ	MX2020
Midplane	REV 04	711-032387	ABAC7474	Lower Backplane
Midplane 1	REV 04	711-032386	ABAC7408	Upper Backplane
PMP 1	REV 03	711-032428	ACAJ1137	Upper Power Midplane
PMP 0	REV 03	711-032426	ACAJ1016	Lower Power Midplane
FPM Board	REV 06	760-040242	ABBT8832	Front Panel Display
PSM 3	REV 0C	740-033727	VK00255	DC 52V Power Supply
Module				
PSM 4	REV 0C	740-033727	VJ00148	DC 52V Power Supply
Module				
PSM 5	REV 0C	740-033727	VK00207	DC 52V Power Supply
Module				
PSM 6	REV 0C	740-033727	VK00319	DC 52V Power Supply
Module				
PSM 7	REV 0C	740-033727	VK00264	DC 52V Power Supply
Module				
PSM 8	REV 0B	740-033727	VG00025	DC 52V Power Supply
Module				
PSM 13	REV 0C	740-033727	VK00274	DC 52V Power Supply
Module				
PSM 14	REV 0C	740-033727	VJ00167	DC 52V Power Supply
Module				
PSM 15	REV 0C	740-033727	VK00299	DC 52V Power Supply
Module				
PSM 16	REV 0C	740-033727	VK00213	DC 52V Power Supply
Module				
PSM 17	REV 0C	740-033727	VK00253	DC 52V Power Supply
Module				
PDM 0	REV 0B	740-038109	VJ00040	DC Power Dist Module
PDM 2	REV 0B	740-038109	VJ00025	DC Power Dist Module
Routing Engine 0	REV 02	740-041821	9009089735	RE-S-1800x4
Routing Engine 1	REV 02	740-041821	9009089731	RE-S-1800x4
CB 0	REV 04	750-040257	ZT2846	Control Board
CB 1	REV 04	750-040257	ZT2877	Control Board
SPMB 0	REV 01	711-041855	ZS2282	PMB Board
SPMB 1	REV 01	711-041855	ZS2261	PMB Board
SFB 0	REV 07	711-032385	ZZ2582	Switch Fabric Board
SFB 1	REV 04	711-032385	ZV4229	Switch Fabric Board
SFB 2	REV 07	711-032385	CAAB4902	Switch Fabric Board
SFB 3	REV 07	711-032385	CAAB4891	Switch Fabric Board
SFB 4	REV 07	711-032385	CAAB4883	Switch Fabric Board
SFB 5	REV 07	711-032385	CAAB4889	Switch Fabric Board
SFB 6	REV 06	711-032385	ZV1818	Switch Fabric Board
SFB 7	REV 07	711-032385	CAAB4897	Switch Fabric Board
FPC 0	REV 34	750-031090	ZT9799	MPC Type 2 3D EQ
CPU	REV 06	711-030884	ZS1122	MPC PMB 2G
MIC 0	REV 11	750-033535	CAAD7674	MIC-3D-10C192-XFP
PIC 0		BUILTIN	BUILTIN	MIC-3D-10C192-XFP
Xcvr 0	REV 01	740-014279	753019A00404	XFP-OC192-SR
MIC 1	REV 14	750-031967	ZM6103	MIC-3D-80C30C12-40C48
PIC 2		BUILTIN	BUILTIN	MIC-3D-80C30C12-40C48
Xcvr 0	REV 01	740-011615	PEF1AZP	SFP-IR
Xcvr 1	REV 01	740-011615	PEF1AZN	SFP-IR
Xcvr 2	REV 01	740-021308	ANA0N8S	SFP+-10G-SR
QXM 0	REV 06	711-028408	ZT9339	MPC QXM
QXM 1	REV 06	711-028408	ZT9237	MPC QXM
FPC 9	REV 34	750-031090	ZT9770	MPC Type 2 3D EQ
CPU	REV 06	711-030884	ZS1302	MPC PMB 2G
MIC 0	REV 24	750-028387	YJ3950	3D 4x 10GE XFP
PIC 0		BUILTIN	BUILTIN	2x 10GE XFP
Xcvr 0		NON-JNPR	T09M52516	XFP-10G-SR



Xcvr 1		NON-JNPR	CA49BK095	XFP-10G-SR
PIC 1		BUILTIN	BUILTIN	2x 10GE XFP
Xcvr 0	REV 02	740-014289	C834XU01T	XFP-10G-SR
Xcvr 1		NON-JNPR	T09M52515	XFP-10G-SR
MIC 1	REV 11	750-033535	CAAD7681	MIC-3D-10C192-XFP
PIC 2		BUILTIN	BUILTIN	MIC-3D-10C192-XFP
Xcvr 0	REV 01	740-014279	KBQ02BE	XFP-OC192-SR
QXM 0	REV 06	711-028408	ZT9151	MPC QXM
QXM 1	REV 06	711-028408	ZT9116	MPC QXM
FPC 10	REV 27	750-033205	ZL6215	MPCE Type 3 3D
CPU	REV 07	711-035209	ZK9038	HMPC PMB 2G
MIC 0	REV 18	750-028380	YG6885	3D 2x 10GE XFP
PIC 0		BUILTIN	BUILTIN	1x 10GE XFP
Xcvr 0	REV 01	740-014289	C706XU0AG	XFP-10G-SR
PIC 1		BUILTIN	BUILTIN	1x 10GE XFP
Xcvr 0	REV 02	740-014289	T08L84366	XFP-10G-SR
FPC 14	REV 09	750-037355	CAAF1534	MPC4E 3D 2CGE+8XGE
CPU	REV 08	711-035209	CAAB9879	HMPC PMB 2G
PIC 0		BUILTIN	BUILTIN	4x10GE SFPP
Xcvr 0	REV 01	740-021308	21T511100436	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AHPOGPM	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	123363A00032	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	19T511100477	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	1X100GE CFP
Xcvr 0		NON-JNPR	X12J00260	CFP-100G-SR10
PIC 2		BUILTIN	BUILTIN	4x10GE SFPP
Xcvr 0	REV 01	740-021308	21T511104086	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	21T511104627	SFP+-10G-SR
Xcvr 3	REV 01	740-021308	21T511104644	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	1X100GE CFP
FPC 19	REV 32	750-028467	ZR2008	MPC 3D 16x 10GE
CPU	REV 10	711-029089	ZT6933	AMPC PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	19T511100291	SFP+-10G-SR
Xcvr 1	REV 01	740-021308	AMH02VE	SFP+-10G-SR
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	23T511102128	SFP+-10G-SR
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-021308	AMS15PP	SFP+-10G-SR
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	123363A00716	SFP+-10G-SR
ADC 0	REV 05	750-043596	CAAC2072	Adapter Card
ADC 9	REV 01	750-043596	ZV4111	Adapter Card
ADC 10	REV 05	750-043596	CAAC2058	Adapter Card
ADC 14	REV 02	750-043596	ZW1561	Adapter Card
ADC 19	REV 01	750-043596	ZV4127	Adapter Card
Fan Tray 0	REV 03	760-046960	ACAY0124	172mm FanTray - 6 Fans
Fan Tray 1	REV 2A	760-046960	ACAY0022	172mm FanTray - 6 Fans
Fan Tray 2	REV 2A	760-046960	ACAY0023	172mm FanTray - 6 Fans
Fan Tray 3	REV 2A	760-046960	ACAY0025	172mm FanTray - 6 Fans

#### show chassis hardware (T320 Router)

```
user@host> show chassis hardware
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis			19093	T320
Midplane	REV 04	710-004339	BC1436	T320 Backplane
FPM GBUS	REV 03	710-004461	BC1407	T320 FPM Board
FPM Display	REV 04	710-002897	BE0763	FPM Display
CIP	REV 05	710-002895	BB2311	T Series CIP
PEM 0	Rev 01	740-004359	NB12546	Power Entry Module
SCG 0	REV 06	710-004455	AY4522	T320 Sonet



Clock Gen.				
Routing Engine 0				unknown
CB 0	REV 13	710-002728	BC1577	T Series
Control Board				
CB 1	REV 13	710-002728	BC1595	T Series
Control Board				
FPC 1	REV 09	710-007531	HS1572	FPC Type 2
CPU	REV 15	710-001726	HR8763	FPC CPU
PIC 0	REV 01	750-010618	CB5579	4x G/E SFP,
1000 BASE				
SFP 0	REV 01	740-007326	P5809Z1	SFP-SX
SFP 1	REV 01	740-007326	P4Q10XU	SFP-SX
SFP 2		NON-JNPR	RA45020031	SFP-SX
SFP 3		NON-JNPR	RA45020032	SFP-SX
PIC 1	REV 01	750-010618	CD9587	4x G/E SFP,
1000 BASE				
SFP 0		NON-JNPR	P5A08QZ	SFP-T
SFP 1	REV 01	740-007326	P4Q133K	SFP-SX
SFP 2	REV 01	740-007326	P5809YY	SFP-SX
SFP 3	REV 01	740-007327	4C81704	SFP-LX
MMB 1	REV 03	710-005555	HR9401	MMB-288mbit
PPB 0	REV 04	710-003758	HR2886	PPB Type 2
FPC 2	REV 07	710-005860	HP2392	FPC Type 1
CPU	REV 14	710-001726	HP7797	FPC CPU
PIC 0	REV 02	750-007643	HM0853	1x G/E QPP,
1000 BASE				
SFP 0	REV 01	740-007326	P11E9JJ	SFP-SX
MMB 1	REV 02	710-005555	HN2379	MMB-288mbit
PPB 0	REV 04	710-003758	HP8092	PPB Type 2
FPC 3	REV 07	710-005860	HP2393	FPC Type 1
CPU	REV 14	710-001726	HP0968	FPC CPU
PIC 0	REV 01	750-010240	CB5363	1x G/E SFP,
1000 BASE				
SFP 0	REV 01	740-007326	P4R0PNH	SFP-SX
PIC 1	REV 03	750-003034	HD2832	4x OC-3 SONET,
SMIR				
MMB 1	REV 02	710-005555	HN6307	MMB-288mbit
PPB 0	REV 04	710-003758	HP5051	PPB Type 2
FPC 4	REV 01	710-010845	JD3872	FPC Type 4
CPU	REV 02	710-011481	JB6042	FPC CPU
5	REV 01	710-005802	BC1566	FPC Type 2
CPU	REV 09	710-001726	AY4922	FPC CPU
PIC 0	REV 02	750-008155	BE2114	2x G/E QPP,
1000 BASE				
SFP 0	REV 01	740-007326	P4R0PMQ	SFP-SX
SFP 1	REV 01	740-007326	P4R0PN9	SFP-SX
PIC 1	REV 01	750-008155	BE2116	2x G/E QPP,
1000 BASE				
SFP 0	REV 01	740-007326	P4R0PNZ	SFP-SX
SFP 1		NON-JNPR	2908	SFP-T
MMB 1	REV 01	710-005555	AZ2246	MMB-288mbit
PPB 0	REV 03	710-003758	AY4839	PPB Type 2
FPC 7	REV 01	710-005803	AZ2123	FPC Type 3
...				

### show chassis hardware (T640 Router)

user@host> show chassis hardware

Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			19182	T640
Midplane	REV 04	710-002726	AX5608	T640 Backplane
FPM GBUS	REV 02	710-002901	HE3064	T640 FPM Board



FPM Display	REV 02	710-002897	HE7864	FPM Display
CIP	REV 05	710-002895	HA5024	T Series CIP
PEM 0	Rev 02	740-029522	VH26235	AC PEM 10kW US
PEM 1	Rev 02	740-029522	VH26230	AC PEM 10kW US
SCG 0	REV 03	710-003423	HA4508	T640 Sonet Clock Gen.
Routing Engine 0	REV 02	740-005022	210865700483	RE-3.0 (RE-600)
CB 0	REV 01	710-002728	HD3044	T Series Control Board
FPC 2	REV 04	710-001721	HD5572	FPC Type 3
CPU	REV 06	710-001726	HA4712	FPC CPU
PIC 1	REV 03	750-009567	HV2331	1x 10GE(LAN),XENPAK
SFP 0	REV 01	740-009898	USC202R103	XENPAK-SR
PIC 2	REV 03	750-009567	HV2332	1x 10GE(LAN),XENPAK
SFP 0	REV 01	740-011268	USC202R112	XENPAK-ZR
PIC 3	REV 03	750-009567	HX4416	1x 10GE(LAN),XENPAK
SFP 0	REV 01	740-012056	434TC004	XENPAK-CX4
PIC 4	REV 03	750-009567	HX4420	1x 10GE(LAN),XENPAK
SFP 0	REV 01	740-012058	434TC124	XENPAK-LX4
FPC 5	REV 01	710-013553	JE4839	E2-FPC Type 1
CPU	REV 01	710-013569	JW9163	FPC CPU
PIC 0	REV 01	750-009567	HX4419	1x 10GE(LAN),XENPAK
SFP 0	REV 01	740-009898	USC202RT05	XENPAK-LR
PIC 1	REV 03	750-009567	HN7426	1x 10GE(LAN),XENPAK
SFP 0	REV 01	740-009550	03L90051	XENPAK-ER
PIC 2	REV 03	750-009467	HT7423	1x 10GE(LAN),XENPAK
SFP 0		NON-JNPR		UNKNOWN
PIC 3	REV 04	750-005100	AY4850	1x 10GE(LAN),DWDM
FPC 4	REV 01	710-010845	JD3872	FPC Type 4
CPU	REV 02	710-011481	JB6042	FPC CPU
Fan Tray 0				Front Top Fan Tray
Fan Tray 1				Front Bottom Fan Tray
Fan Tray 2				Rear Fan Tray

#### show chassis hardware models (T640 Router)

user@host> show chassis hardware models				
Hardware inventory:				
Item	Version	Part number	CLEI code	FRU model number
Midplane	REV 04	710-002726		CHAS-BP-T640-S
FPM Display	REV 02	710-002897		CRAFT-T640-S
CIP	REV 05	710-002895		CIP-L-T640-S
PEM 0	Rev 01	740-002595		PWR-T-DC-S
SCG 0	REV 04	710-003423		SCG-T-S
SCG 1	REV 04	710-003423		SCG-T-S
Routing Engine 0	REV 01	740-005022		RE-600-2048-S
Routing Engine 1	REV 07	740-005022		RE-600-2048-S
CB 0	REV 06	710-002726		CHAS-BP-T640-S
CB 1	REV 06	710-002728		CB-L-T-S
FPC 5	REV 05	710-007527		T640-FPC2
PIC 0	REV 05	750-002510		PB-2GE-SX
PIC 1	REV 05	750-001901		PB-40C12-SON-SMIR
FPC 6	REV 03	710-001721		T640-FPC3
PIC 1	REV 01	750-009553		PC-40C48-SON-SFP
SIB 4	REV 02	750-005486		SIB-I-T640-S
Fan Tray 0				FANTRAY-T-S
Fan Tray 1				FANTRAY-T-S
Fan Tray 2				FAN-REAR-TX-T640-S

#### show chassis hardware extensive (T640 Router)

user@host> show chassis hardware extensive				
Hardware inventory:				
Item	Version	Part number	Serial number	Description
Chassis				T640
Jedec Code:	0x7fb0	EEPROM Version:	0x01	



```

P/N: ..... S/N: .....
Assembly ID: 0x0507 Assembly Version: 00.00
Date: 00-00-0000 Assembly Flags: 0x00
Version: .....
ID: Gibson LCC Chassis
Board Information Record:
Address 0x00: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
I2C Hex Data:
Address 0x00: 7f b0 01 ff 05 07 00 00 00 00 00 00 00 00 00 00
Address 0x10: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
Address 0x20: ff ff ff ff ff ff ff ff ff ff ff ff ff 00 00 00 00
Address 0x30: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
Address 0x40: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
Midplane REV 04 710-002726 AX5633
Jedec Code: 0x7fb0 EEPROM Version: 0x01
P/N: 710-002726. S/N: S/N AX5633.
Assembly ID: 0x0127 Assembly Version: 01.04
Date: 06-27-2001 Assembly Flags: 0x00
Version: REV 04.....
ID: Gibson Backplane
Board Information Record:
Address 0x00: ad 01 08 00 00 90 69 0e f8 00 ff ff ff ff ff ff
I2C Hex Data:
Address 0x00: 7f b0 01 ff 01 27 01 04 52 45 56 20 30 34 00 00
Address 0x10: 00 00 00 00 37 31 30 2d 30 30 32 37 32 36 00 00
Address 0x20: 53 2f 4e 20 41 58 35 36 33 33 00 00 00 1b 06 07
Address 0x30: d1 ff ff ff ad 01 08 00 00 90 69 0e f8 00 ff ff
Address 0x40: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
FPM GBUS REV 02 710-002901 HE3245
...
FPM Display REV 02 710-002897 HA4873
...
CIP REV 05 710-002895 HA4729
...
PEM 1 RevX02 740-002595 MD21815 Power Entry Module
...
SCG 0 REV 04 710-003423 HF6023
...
SCG 1 REV 04 710-003423 HF6061
...
Routing Engine 0 REV 01 740-005022 210865700292 RE-3.0
...
CB 0 REV 06 710-002728 HE3614
...
FPC 1 REV 01 710-002385 HE3009 FPC Type 1
...
REV 06 710-001726 HC0010

```

#### show chassis hardware (T4000 Router)

```
user@host> show chassis hardware
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis			JN1172F25AHA	T4000
Midplane	REV 01	710-027486	RC8355	T-series Backplane
FPM GBUS	REV 13	710-002901	BBAE0927	T640 FPM Board
FPM Display	REV 01	710-021387	EF6764	T1600 FPM Display
CIP	REV 06	710-002895	BBAD9210	T-series CIP
PEM 0	REV 01	740-036442	VA00016	Power Entry Module 6x60
SCG 0	REV 18	710-003423	BBAD7248	T640 Sonet Clock Gen.
SCG 1	REV 18	710-003423	BBAE3874	T640 Sonet Clock Gen.
Routing Engine 0	REV 05	740-026941	P737F-002248	RE-DUO-1800
Routing Engine 1	REV 06	740-026941	P737F-002653	RE-DUO-1800
CB 0	REV 09	710-022597	ED0295	LCC Control Board



CB 1	REV 09	710-022597	EA6050	LCC Control Board
FPC 0	REV 26	750-032819	EK1173	FPC Type 5-3D
CPU	REV 12	711-030686	EJ8584	SNG PMB
PIC 0	REV 07	750-034624	EF6837	12x10GE (LAN/WAN) SFPP
Xcvr 0	REV 01	740-031980	123363A01145	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	123363A01147	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AJJ01P3	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B10M03256	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	AJJ01M2	SFP+-10G-SR
Xcvr 5	REV 01	740-031980	123363A01137	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	AJJ01PN	SFP+-10G-SR
Xcvr 7	REV 01	740-031980	AJJ01NW	SFP+-10G-SR
Xcvr 8	REV 01	740-031980	123363A01139	SFP+-10G-SR
Xcvr 9	REV 01	740-031980	AJJ01KE	SFP+-10G-SR
Xcvr 10	REV 01	740-031980	123363A01336	SFP+-10G-SR
Xcvr 11	REV 01	740-031980	B10M01325	SFP+-10G-SR
PIC 1	REV 07	750-034624	EF6800	12x10GE (LAN/WAN) SFPP
Xcvr 0	REV 01	740-031980	AJJ01SA	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AJJ01QZ	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AJH0217	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AJJ01TE	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	AJJ01KV	SFP+-10G-SR
Xcvr 5	REV 01	740-031980	AJJ01MU	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	AJJ01R0	SFP+-10G-SR
Xcvr 7	REV 01	740-031980	AJJ01TC	SFP+-10G-SR
Xcvr 8	REV 01	740-031980	AJJ0364	SFP+-10G-SR
Xcvr 9	REV 01	740-031980	AJD0GV3	SFP+-10G-SR
Xcvr 10	REV 01	740-031980	B10M03343	SFP+-10G-SR
Xcvr 11	REV 01	740-031980	AJJ01QJ	SFP+-10G-SR
LMB 0	REV 05	711-034381	EJ8490	Type-0 LMB
LMB 1	REV 04	711-035774	EJ8517	Type-1 LMB
LMB 2	REV 05	711-034381	EJ8489	Type-0 LMB
FPC 3	REV 07	750-032819	EG3637	FPC Type 5-3D
CPU	REV 09	711-030686	EG0150	SNG PMB
PIC 0	REV 08	750-035293	EF3657	1x100GE
Xcvr 0	REV 01	740-032210	C22CQNJ	CFP-100G-LR4
PIC 1	REV 10	750-034624	BBAN4098	12x10GE (LAN/WAN) SFPP
Xcvr 0	REV 01	740-031980	B11J04902	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11J04891	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AJJ01MX	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11J04183	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	B11J04894	SFP+-10G-SR
Xcvr 5	REV 01	740-031980	B11J04184	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	B11J04897	SFP+-10G-SR
Xcvr 7	REV 01	740-031980	B11J04899	SFP+-10G-SR
Xcvr 8	REV 01	740-031980	AJJ01TV	SFP+-10G-SR
Xcvr 9	REV 01	740-031980	B11J04057	SFP+-10G-SR
Xcvr 10	REV 01	740-031980	AJJ01M4	SFP+-10G-SR
Xcvr 11	REV 01	740-031980	B11J04905	SFP+-10G-SR
LMB 0	REV 04	711-034381	EG1524	Type-0 LMB
LMB 1	REV 03	711-035774	EG0345	Type-1 LMB
LMB 2	REV 04	711-034381	EG1522	Type-0 LMB
FPC 5	REV 03	710-033871	BBAJ0768	FPC Type 4-ES
CPU	REV 11	710-016744	BBAH9342	ST-PMB2
PIC 0	REV 09	750-029262	EE6789	100GE
PIC 1	REV 03	750-034781	EE6655	100GE CFP
Xcvr 0	REV 01	740-032210	J11A22334	CFP-100G-LR4
BRIDGE 0	REV 03	711-029995	EE6572	100GE Bridge Board
MMB 0	REV 07	710-025563	BBAJ4657	ST-MMB2
MMB 1	REV 07	710-025563	BBAJ3073	ST-MMB2
FPC 6	REV 05	750-010153	EF4936	FPC Type 5-3D



CPU	REV 06	711-030686	EF4189	SNG PMB
PIC 0	REV 10	750-034624	BBAN4109	12x10GE (LAN/WAN) SFPP
Xcvr 0	REV 01	740-031980	B11J04895	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11J04898	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11J04021	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11J04903	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	B11J04311	SFP+-10G-SR
Xcvr 5	REV 01	740-031980	B11J04059	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	B11J04016	SFP+-10G-SR
Xcvr 7	REV 01	740-031980	B11J04017	SFP+-10G-SR
Xcvr 8	REV 01	740-031980	B11J04887	SFP+-10G-SR
Xcvr 9	REV 01	740-031980	B11J04297	SFP+-10G-SR
Xcvr 10	REV 01	740-031980	B11J04893	SFP+-10G-SR
Xcvr 11	REV 01	740-031980	B11J04022	SFP+-10G-SR
PIC 1	REV 02	750-034624	EE3711	12x10GE (LAN/WAN) SFPP
Xcvr 0	REV 01	740-031980	AJH033X	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AJJ01N0	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AJJ01SV	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AJJ032L	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	B10M01593	SFP+-10G-SR
Xcvr 5	REV 01	740-031980	AJD0FF1	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	AJJ01NU	SFP+-10G-SR
Xcvr 7	REV 01	740-031980	123363A01305	SFP+-10G-SR
Xcvr 8	REV 01	740-031980	B10M00361	SFP+-10G-SR
Xcvr 9	REV 01	740-031980	AJJ01M7	SFP+-10G-SR
Xcvr 10	REV 01	740-031980	AJJ032X	SFP+-10G-SR
Xcvr 11	REV 01	740-031980	AJJ01PG	SFP+-10G-SR
LMB 0	REV 04	711-034381	EF3838	Type-0 LMB
LMB 1	REV 03	711-035774	EF3821	Type-1 LMB
LMB 2	REV 04	711-034381	EF3834	Type-0 LMB
SPMB 0	REV 05	710-023321	ED1990	LCC Switch CPU
SPMB 1	REV 05	710-023321	EA2768	LCC Switch CPU
SIB 0	REV 02	711-036340	EF8802	SIB-HC-3D
SIB 1	REV 07	711-036340	EG2286	SIB-HC-3D
SIB 2	REV 07	711-036340	EG2252	SIB-HC-3D
SIB 3	REV 02	711-036340	EF1358	SIB-HC-3D
SIB 4	REV 02	711-036340	EF8806	SIB-HC-3D
Fan Tray 0				Front Top Fan Tray
Fan Tray 1				Front Bottom Fan Tray
-- Rev 2				
Fan Tray 2				Rear Fan Tray -- Rev 3

show chassis hardware  
(T4000 Router with 16

user@host> show chassis hardware

Hardware inventory:

Item	Version	Part number	Serial number	Description
------	---------	-------------	---------------	-------------



GB line card chassis  
(LCC) Routing Engine)

Chassis				JN11BDF2CAHA	T1600
Midplane	REV 01	710-027486	ACAJ0774		T640 Backplane
FPM GBUS	REV 13	710-002901	BBAL6812		T640 FPM Board
FPM Display	REV 04	710-021387	BBAP2679		T1600 FPM Display
CIP	REV 06	710-002895	BBAP4758		T-series CIP
PEM 0	Rev 03	740-026384	XF86421		Power Entry Module 3x80
PEM 1	Rev 03	740-026384	XF86429		Power Entry Module 3x80
SCG 0	REV 18	710-003423	BBAP1896		T640 Sonet Clock Gen.
SCG 1	REV 18	710-003423	BBAN8659		T640 Sonet Clock Gen.
Routing Engine 0	REV 01	740-042243	737F-002238		RE-DUO-1800-16G
Routing Engine 1	REV 01	740-042243	737F-002403		RE-DUO-1800-16G
CB 1	REV 11	710-022597	EK4526		LCC Control Board
CB 1	REV 11	710-022597	EK4527		LCC Control Board
FPC 0	REV 05	710-033871	EK5644		FPC Type 4-ES
CPU	REV 11	710-016744	EK3428		ST-PMB2
PIC 0	REV 20	750-017405	EJ3041		4x 10GE (LAN/WAN) XFP
PIC 1	REV 17	750-026962	EH7536		10x10GE (LAN/WAN) SFPP
MMB 0	REV 07	710-025563	EK6039		ST-MMB2
MMB 1	REV 07	710-025563	EK6086		ST-MMB2
FPC 1	REV 05	710-033871	EK6583		FPC Type 4-ES
CPU	REV 11	710-016744	EK3401		ST-PMB2
PIC 0	REV 17	750-026962	EJ8948		10x10GE (LAN/WAN) SFPP
MMB 0	REV 07	710-025563	EK6202		ST-MMB2
MMB 1	REV 07	710-025563	EK6112		ST-MMB2
SPMB 1	REV 05	710-023321	EK4900		LCC Switch CPU
SIB 0	REV 11	710-013074	EK5958		SIB-I8-SF
SIB 1	REV 11	710-013074	EK4606		SIB-I8-SF
SIB 2	REV 11	710-013074	EK5971		SIB-I8-SF
SIB 3	REV 11	710-013074	EK4609		SIB-I8-SF
SIB 4	REV 11	710-013074	EK4602		SIB-I8-SF
Fan Tray 0					Front Top Fan Tray
Fan Tray 1					Front Bottom Fan Tray
Fan Tray 2					Rear Fan Tray -- Rev 2

show chassis hardware  
clei-models (T4000  
Router)

user@host> show chassis hardware clei-models					
Hardware inventory:					
Item	Version	Part number	CLEI code	FRU model number	
Midplane	REV 01	710-027486	IPMJ700DRD	CHAS-BP-T1600-S	
FPM Display	REV 01	710-021387		CRAFT-T1600-S	
CIP	REV 06	710-002895		CIP-L-T640-S	
PEM 0	REV 01	740-036442	IPUPAG6KAA	PWR-T-6-60-DC	
SCG 0	REV 18	710-003423		SCG-T-S	
SCG 1	REV 18	710-003423		SCG-T-S	
Routing Engine 0	REV 05	740-026941		RE-DUO-C1800-8G-S	
Routing Engine 1	REV 06	740-026941		RE-DUO-C1800-8G-S	
CB 0	REV 09	710-022597		CB-LCC-S	
CB 1	REV 09	710-022597		CB-LCC-S	
FPC 3					
PIC 0	REV 08	750-035293	XXXXXXXXBB	PF-1CGE-CFP	
PIC 1	REV 10	750-034624	XXXXXXXXCC	PF-12XGE-SFPP	
FPC 5	REV 03	710-033871	IPUCAMBCTD	T1600-FPC4-ES	
PIC 1	REV 03	750-034781	IPUIBKLMMA	PD-1CE-CFP-FPC4	
FPC 6					
PIC 0	REV 10	750-034624	XXXXXXXXCC	PF-12XGE-SFPP	
Fan Tray 0				FANTRAY-T-S	
Fan Tray 1				FANTRAY-T4000-S	
Fan Tray 2				FANTRAY-TXP-R-S	

## show chassis hardware

```
user@host> show chassis hardware detail
Hardware inventory:
```



detail (T4000 Router)	Item	Version	Part number	Serial number	Description
	Chassis			JN1172F25AHA	T4000
	Midplane	REV 01	710-027486	RC8355	T-series Backplane
	FPM GBUS	REV 13	710-002901	BBAE0927	T640 FPM Board
	FPM Display	REV 01	710-021387	EF6764	T1600 FPM Display
	CIP	REV 06	710-002895	BBAD9210	T-series CIP
	PEM 0	REV 01	740-036442	VA00016	Power Entry Module 6x60
	SCG 0	REV 18	710-003423	BBAD7248	T640 Sonet Clock Gen.
	SCG 1	REV 18	710-003423	BBAE3874	T640 Sonet Clock Gen.
	Routing Engine 0	REV 05	740-026941	P737F-002248	RE-DUO-1800
	ad0 3823 MB	SMART CF		2009121602A661576157	Compact Flash
	ad1 59690 MB	STEC MACH-8 SSD		STM000103FDB	Disk 1
	Routing Engine 1	REV 06	740-026941	P737F-002653	RE-DUO-1800
	ad0 3823 MB	SMART CF		201011150153F52CF52C	Compact Flash
	ad1 62720 MB	SMART Lite SATA Drive		2010110900150A880A88	Disk 1
	CB 0	REV 09	710-022597	ED0295	LCC Control Board
	CB 1	REV 09	710-022597	EA6050	LCC Control Board
	FPC 0	REV 26	750-032819	EK1173	FPC Type 5-3D
	CPU	REV 12	711-030686	EJ8584	SNG PMB
	PIC 0	REV 07	750-034624	EF6837	12x10GE (LAN/WAN) SFPP
	Xcvr 0	REV 01	740-031980	123363A01145	SFP+-10G-SR
	Xcvr 1	REV 01	740-031980	123363A01147	SFP+-10G-SR
	Xcvr 2	REV 01	740-031980	AJJ01P3	SFP+-10G-SR
	Xcvr 3	REV 01	740-031980	B10M03256	SFP+-10G-SR
	Xcvr 4	REV 01	740-031980	AJJ01M2	SFP+-10G-SR
	Xcvr 5	REV 01	740-031980	123363A01137	SFP+-10G-SR
	Xcvr 6	REV 01	740-031980	AJJ01PN	SFP+-10G-SR
	Xcvr 7	REV 01	740-031980	AJJ01NW	SFP+-10G-SR
	Xcvr 8	REV 01	740-031980	123363A01139	SFP+-10G-SR
	Xcvr 9	REV 01	740-031980	AJJ01KE	SFP+-10G-SR
	Xcvr 10	REV 01	740-031980	123363A01336	SFP+-10G-SR
	Xcvr 11	REV 01	740-031980	B10M01325	SFP+-10G-SR
	PIC 1	REV 07	750-034624	EF6800	12x10GE (LAN/WAN) SFPP
	Xcvr 0	REV 01	740-031980	AJJ01SA	SFP+-10G-SR
	Xcvr 1	REV 01	740-031980	AJJ01QZ	SFP+-10G-SR
	Xcvr 2	REV 01	740-031980	AJH0217	SFP+-10G-SR
	Xcvr 3	REV 01	740-031980	AJJ01TE	SFP+-10G-SR
	Xcvr 4	REV 01	740-031980	AJJ01KV	SFP+-10G-SR
	Xcvr 5	REV 01	740-031980	AJJ01MU	SFP+-10G-SR
	Xcvr 6	REV 01	740-031980	AJJ01R0	SFP+-10G-SR
	Xcvr 7	REV 01	740-031980	AJJ01TC	SFP+-10G-SR
	Xcvr 8	REV 01	740-031980	AJJ0364	SFP+-10G-SR
	Xcvr 9	REV 01	740-031980	AJD0GV3	SFP+-10G-SR
	Xcvr 10	REV 01	740-031980	B10M03343	SFP+-10G-SR
	Xcvr 11	REV 01	740-031980	AJJ01QJ	SFP+-10G-SR
	LMB 0	REV 05	711-034381	EJ8490	Type-0 LMB
	LMB 1	REV 04	711-035774	EJ8517	Type-1 LMB
	LMB 2	REV 05	711-034381	EJ8489	Type-0 LMB
	FPC 3	REV 07	750-032819	EG3637	FPC Type 5-3D
	CPU	REV 09	711-030686	EG0150	SNG PMB
	PIC 0	REV 08	750-035293	EF3657	1x100GE
	Xcvr 0	REV 01	740-032210	C22CQNJ	CFP-100G-LR4
	PIC 1	REV 10	750-034624	BBAN4098	12x10GE (LAN/WAN) SFPP
	Xcvr 0	REV 01	740-031980	B11J04902	SFP+-10G-SR
	Xcvr 1	REV 01	740-031980	B11J04891	SFP+-10G-SR
	Xcvr 2	REV 01	740-031980	AJJ01MX	SFP+-10G-SR
	Xcvr 3	REV 01	740-031980	B11J04183	SFP+-10G-SR
	Xcvr 4	REV 01	740-031980	B11J04894	SFP+-10G-SR
	Xcvr 5	REV 01	740-031980	B11J04184	SFP+-10G-SR
	Xcvr 6	REV 01	740-031980	B11J04897	SFP+-10G-SR
	Xcvr 7	REV 01	740-031980	B11J04899	SFP+-10G-SR



Xcvr 8	REV 01	740-031980	AJJ01TV	SFP+-10G-SR
Xcvr 9	REV 01	740-031980	B11J04057	SFP+-10G-SR
Xcvr 10	REV 01	740-031980	AJJ01M4	SFP+-10G-SR
Xcvr 11	REV 01	740-031980	B11J04905	SFP+-10G-SR
LMB 0	REV 04	711-034381	EG1524	Type-0 LMB
LMB 1	REV 03	711-035774	EG0345	Type-1 LMB
LMB 2	REV 04	711-034381	EG1522	Type-0 LMB
FPC 5	REV 03	710-033871	BBAJ0768	FPC Type 4-ES
CPU	REV 11	710-016744	BBAH9342	ST-PMB2
PIC 0	REV 09	750-029262	EE6789	100GE
PIC 1	REV 03	750-034781	EE6655	100GE CFP
Xcvr 0	REV 01	740-032210	J11A22334	CFP-100G-LR4
BRIDGE 0	REV 03	711-029995	EE6572	100GE Bridge Board
MMB 0	REV 07	710-025563	BBAJ4657	ST-MMB2
MMB 1	REV 07	710-025563	BBAJ3073	ST-MMB2
FPC 6	REV 05	750-010153	EF4936	FPC Type 5-3D
CPU	REV 06	711-030686	EF4189	SNG PMB
PIC 0	REV 10	750-034624	BBAN4109	12x10GE (LAN/WAN) SFPP
Xcvr 0	REV 01	740-031980	B11J04895	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11J04898	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	B11J04021	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	B11J04903	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	B11J04311	SFP+-10G-SR
Xcvr 5	REV 01	740-031980	B11J04059	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	B11J04016	SFP+-10G-SR
Xcvr 7	REV 01	740-031980	B11J04017	SFP+-10G-SR
Xcvr 8	REV 01	740-031980	B11J04887	SFP+-10G-SR
Xcvr 9	REV 01	740-031980	B11J04297	SFP+-10G-SR
Xcvr 10	REV 01	740-031980	B11J04893	SFP+-10G-SR
Xcvr 11	REV 01	740-031980	B11J04022	SFP+-10G-SR
PIC 1	REV 02	750-034624	EE3711	12x10GE (LAN/WAN) SFPP
Xcvr 0	REV 01	740-031980	AJH033X	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	AJJ01N0	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AJJ01SV	SFP+-10G-SR
Xcvr 3	REV 01	740-031980	AJJ032L	SFP+-10G-SR
Xcvr 4	REV 01	740-031980	B10M01593	SFP+-10G-SR
Xcvr 5	REV 01	740-031980	AJD0FF1	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	AJJ01NU	SFP+-10G-SR
Xcvr 7	REV 01	740-031980	123363A01305	SFP+-10G-SR
Xcvr 8	REV 01	740-031980	B10M00361	SFP+-10G-SR
Xcvr 9	REV 01	740-031980	AJJ01M7	SFP+-10G-SR
Xcvr 10	REV 01	740-031980	AJJ032X	SFP+-10G-SR
Xcvr 11	REV 01	740-031980	AJJ01PG	SFP+-10G-SR
LMB 0	REV 04	711-034381	EF3838	Type-0 LMB
LMB 1	REV 03	711-035774	EF3821	Type-1 LMB
LMB 2	REV 04	711-034381	EF3834	Type-0 LMB
SPMB 0	REV 05	710-023321	ED1990	LCC Switch CPU
SPMB 1	REV 05	710-023321	EA2768	LCC Switch CPU
SIB 0	REV 02	711-036340	EF8802	SIB-HC-3D
SIB 1	REV 07	711-036340	EG2286	SIB-HC-3D
SIB 2	REV 07	711-036340	EG2252	SIB-HC-3D
SIB 3	REV 02	711-036340	EF1358	SIB-HC-3D
SIB 4	REV 02	711-036340	EF8806	SIB-HC-3D
Fan Tray 0				Front Top Fan Tray
Fan Tray 1				Front Bottom Fan Tray
-- Rev 2				
Fan Tray 2				Rear Fan Tray -- Rev 3

show chassis hardware models (T4000)

user@host> show chassis hardware models

Hardware inventory:



## Router)

Item	Version	Part number	Serial number	FRU model number
Midplane	REV 01	710-027486	RC8355	CHAS-BP-T1600-S
FPM Display	REV 01	710-021387	EF6764	CRAFT-T1600-S
CIP	REV 06	710-002895	BBAD9210	CIP-L-T640-S
PEM 0	REV 01	740-036442	VA00016	PWR-T-6-60-DC
SCG 0	REV 18	710-003423	BBAD7248	SCG-T-S
SCG 1	REV 18	710-003423	BBAE3874	SCG-T-S
Routing Engine 0	REV 05	740-026941	P737F-002248	RE-DUO-C1800-8G-S
Routing Engine 1	REV 06	740-026941	P737F-002653	RE-DUO-C1800-8G-S
CB 0	REV 09	710-022597	ED0295	CB-LCC-S
CB 1	REV 09	710-022597	EA6050	CB-LCC-S
FPC 3				
PIC 0	REV 08	750-035293	EF3657	PF-1CGE-CFP
PIC 1	REV 10	750-034624	BBAN4098	PF-12XGE-SFPP
FPC 5	REV 03	710-033871	BBAJ0768	T1600-FPC4-ES
PIC 1	REV 03	750-034781	EE6655	PD-1CE-CFP-FPC4
FPC 6				
PIC 0	REV 10	750-034624	BBAN4109	PF-12XGE-SFPP
Fan Tray 0				FANTRAY-T-S
Fan Tray 1				FANTRAY-T4000-S
Fan Tray 2				FAN-REAR-TXP-LCC

show chassis hardware  
lcc (TX Matrix Router)

```
user@host> show chassis hardware lcc 0
lcc0-re0:
```

```
-----
```

Hardware inventory:				
Item	Version	Part number	Serial number	Description
Chassis			65751	T640
Midplane	REV 03	710-005608	RA1408	T640 Backplane
FPM GBUS	REV 09	710-002901	RA2784	T640 FPM Board
FPM Display	REV 05	710-002897	RA2825	FPM Display
CIP	REV 06	710-002895	HT0684	T Series CIP
PEM 0	Rev 11	740-002595	PM18483	Power Entry Module
PEM 1	Rev 11	740-002595	qb13984	Power Entry Module
SCG 0	REV 11	710-003423	HT0022	T640 Sonet Clock Gen.
Routing Engine 0	REV 13	740-005022	210865700363	RE-3.0 (RE-600)
CB 0	REV 03	710-007655	HW1195	Control Board (CB-T)
FPC 1	REV 05	710-007527	HM3245	FPC Type 2
CPU	REV 14	710-001726	HM1084	FPC CPU
PIC 0	REV 02	750-007218	AZ1112	2x OC-12 ATM2 IQ, SMIR
PIC 1	REV 02	750-007745	HG3462	4x OC-3 SONET, SMIR
PIC 2	REV 14	750-001901	BA5390	4x OC-12 SONET, SMIR
PIC 3	REV 09	750-008155	HS3012	2x G/E IQ, 1000 BASE
SFP 0		NON-JNPR	P1186TY	SFP-S
SFP 1	REV 01	740-007326	P11WLTF	SFP-SX
MMB 1	REV 02	710-005555	HL7514	MMB-288mbit
PPB 0	REV 04	710-003758	HM4405	PPB Type 2
PPB 1	REV 04	710-003758	AV1960	PPB Type 2
FPC 2	REV 08	710-010154	HZ3578	E-FPC Type 3
CPU	REV 05	710-010169	HZ3219	FPC CPU-Enhanced
PIC 0	REV 02	750-009567	HX2882	1x 10GE(LAN), XENPAK
SFP 0	REV 01	740-009898	USC202U709	XENPAK-LR
PIC 1	REV 03	750-003336	HJ9954	4x OC-48 SONET, SMSR
PIC 2	REV 01	750-004535	HC0235	1x OC-192 SM SR1
PIC 3	REV 07	750-007141	HX1699	10x 1GE(LAN), 1000 BASE
SFP 0	REV 01	740-007326	2441042	SFP-SX
SFP 1	REV 01	740-007326	2441027	SFP-SX
MMB 0	REV 03	710-010171	HV2365	MMB-5M3-288mbit
MMB 1	REV 03	710-010171	HZ3888	MMB-5M3-288mbit
SPMB 0	REV 09	710-003229	HW5245	T Series Switch CPU



SIB 3	REV 07	710-005781	HR5927	SIB-L8-F16
B Board	REV 06	710-005782	HR5971	SIB-L8-F16 (B)
SIB 4	REV 07	710-005781	HR5903	SIB-L8-F16
B Board	REV 06	710-005782	HZ5275	SIB-L8-F16 (B)

**show chassis hardware**  
**scc (TX Matrix Router)**

user@host> **show chassis hardware scc**  
scc-re0:

```
-----
Hardware inventory:
Item          Version  Part number  Serial number  Description
Chassis
Midplane      REV 04    710-004396   RB0014         TX Matrix
FPM GBUS      REV 04    710-004617   HW9141         SCC Midplane
FPM Display   REV 04    710-004619   HS5950         SCC FPM
CIP 0         REV 01    710-010218   HV9151         SCC CIP
CIP 1         REV 01    710-010218   HV9152         SCC CIP
PEM 1         Rev 11    740-002595   QB13977        Power Entry Module
Routing Engine 0 REV 05    740-008883   P11123900153  RE-4.0 (RE-1600)
CB 0          REV 01    710-011709   HR5964         Control Board (CB-TX)
SPMB 0        REV 09    710-003229   HW5293         T Series Switch CPU
SIB 3
SIB 4         REV 01    710-005839   HW1177         SIB-S8-F16
B Board       REV 01    710-005840   HW1202         SIB-S8-F16 (B)
```

**show chassis hardware**  
**(T1600 Router)**

user@host> **show chassis hardware**

```
Hardware inventory:
Item          Version  Part number  Serial number  Description
Chassis
Midplane      REV 03    710-005608   RC4137         T640 Backplane
FPM GBUS      REV 10    710-002901   DT7062         T640 FPM Board
FPM Display   REV 05    710-002897   DS3067         FPM Display
CIP           REV 06    710-002895   DT3386         T-series CIP
PEM 0         Rev 07    740-017906   UA26344        Power Entry Module 3x80
PEM 1         Rev 18    740-002595   UF38441        Power Entry Module
SCG 0         REV 15    710-003423   DV0941         T640 Sonet Clock Gen.
Routing Engine 0 REV 08    740-014082   9009014502     RE-A-2000
Routing Engine 1 REV 07    740-014082   9009009591     RE-A-2000
CB 0          REV 05    710-007655   JA9360         Control Board (CB-T)
CB 1          REV 03    710-017707   DT3251         Control Board (CB-T)
FPC 0         REV 07    710-013558   DR4253         E2-FPC Type 2
CPU           REV 05    710-013563   DS3902         FPC CPU-Enhanced
PIC 0         REV 01    750-010618   CB5446         4x G/E SFP, 1000 BASE
Xcvr 0        REV 01    740-011613   P9F11CW        SFP-SX
Xcvr 1        REV 01    740-011613   P9F15C2        SFP-SX
Xcvr 2        REV 01    740-011782   PB94K0L        SFP-SX
PIC 1         REV 06    750-001900   HB6399         1x OC-48 SONET, SMSR
PIC 2         REV 14    750-001901   AP1092         4x OC-12 SONET, SMIR
PIC 3         REV 07    750-001900   AR8275         1x OC-48 SONET, SMSR
MMB 1         REV 07    710-010171   DS1524         MMB-5M3-288mbit
FPC 1         REV 06    710-013553   DL9067         E2-FPC Type 1
CPU           REV 04    710-013563   DM1685         FPC CPU-Enhanced
PIC 0         REV 08    750-001072   AB1688         1x G/E, 1000 BASE-SX
PIC 1         REV 10    750-012266   JX5519         4x 1GE(LAN), IQ2
Xcvr 0        REV 01    740-011613   AM0812S8UK6    SFP-SX
Xcvr 2        REV 01    740-011613   AM0812S8UK1    SFP-SX
Xcvr 3        REV 01    740-011782   P8N1YHG        SFP-SX
PIC 2         REV 22    750-005634   DP0083         1x CHOC12 IQ SONET, SMIR

MMB 1         REV 07    710-008923   DN1862         MMB 3M 288-bit
FPC 2         REV 01    710-005548   HJ9899         FPC Type 3
```



CPU	REV 06	710-001726	HC0586	FPC CPU
PIC 0	REV 16	750-007141	NC9660	10x 1GE(LAN), 1000 BASE
Xcvr 0	REV 01	740-011613	AM0812S8XAR	SFP-SX
Xcvr 1	REV 01	740-011782	P920E7B	SFP-SX
Xcvr 2	REV 01	740-011613	AM0812S8XAU	SFP-SX
Xcvr 4	REV 01	740-011613	AM0812S8XAK	SFP-SX
Xcvr 5	REV 01	740-011613	AM0812S8XAA	SFP-SX
Xcvr 6	REV 01	740-011613	PAJ4NKY	SFP-SX
Xcvr 7	REV 01	740-011613	AM0812S8UJW	SFP-SX
Xcvr 8	REV 01	740-011782	PB81X89	SFP-SX
Xcvr 9	REV 01	740-011613	AM0812S8UJX	SFP-SX
PIC 1	REV 06	750-015217	DK3280	8x 1GE(TYPE3), IQ2
Xcvr 0	REV 01	740-011782	P8P0A3T	SFP-SX
Xcvr 1	REV 01	740-013111	5090002	SFP-T
Xcvr 2	REV 01	740-011613	AM0814S93BQ	SFP-SX
Xcvr 4		NON-JNPR	PDE0FAN	SFP-SX
Xcvr 5	REV 01	740-011782	P8Q20XY	SFP-SX
Xcvr 6	REV 01	740-011613	AM0812S8UJV	SFP-SX
Xcvr 7	REV 01	740-011613	AM0812S8UP7	SFP-SX
PIC 2	REV 05	750-004695	HT4383	1x Tunnel
PIC 3	REV 17	750-009553	RL0204	4x OC-48 SONET
Xcvr 0	REV 01	740-011785	PDS3T23	SFP-SR
Xcvr 1	REV 01	740-011785	P6Q0F3E	SFP-SR
MMB 0	REV 03	710-004047	HD5843	MMB-288mbit
MMB 1	REV 03	710-004047	HE3208	MMB-288mbit
PPB 0	REV 02	710-002845	HA4524	PPB Type 3
PPB 1	REV 02	710-002845	HA4766	PPB Type 3
FPC 3	REV 01	710-010154	HR0863	E-FPC Type 3
CPU	REV 01	710-010169	HN3422	FPC CPU-Enhanced
PIC 0	REV 07	750-012793	WF5096	1x 10GE(LAN/WAN) IQ2
Xcvr 0		NON-JNPR	M64294TP	XFP-10G-LR
PIC 1	REV 25	750-007141	DV2127	10x 1GE(LAN), 1000 BASE
Xcvr 0	REV 01	740-011613	PFA6LTJ	SFP-SX
Xcvr 1	REV 01	740-011782	P9P0XV4	SFP-SX
Xcvr 2	REV 01	740-011782	P9M0TNX	SFP-SX
Xcvr 4	REV 01	740-011782	P9B0TTP	SFP-SX
Xcvr 5		NON-JNPR	PBS4LED	SFP-SX
PIC 2	REV 17	750-009553	RL0212	4x OC-48 SONET
Xcvr 0	REV 01	740-011785	PDS3T8G	SFP-SR
PIC 3	REV 32	750-003700	DL1279	1x OC-192 12xMM VSR
MMB 0	REV 01	710-010171	HR0821	MMB-288mbit
MMB 1	REV 01	710-010171	HR0818	MMB-288mbit
FPC 4	REV 16	710-013037	EB4919	FPC Type 4-ES
CPU	REV 09	710-016744	BBAA4382	ST-PMB2
PIC 0	REV 03	711-029996	EB1569	100GE
PIC 1	REV 05	711-029999	EB9983	100GE CFP
Xcvr 0	REV 0	740-032210	J10G80746	CFP-100G-LR4
BRIDGE 0	REV 02	711-029995	EB2235	100GE Bridge Board
MMB 0	REV 04	710-025563	BBAA7112	ST-MMB2
MMB 1	REV 04	710-025563	BBAA7149	ST-MMB2
FPC 5	REV 02	710-013037	DE3407	FPC Type 4-ES
CPU	REV 04	710-016744	DA2124	ST-PMB2
PIC 0	REV 16	750-012518	DF2554	4x OC-192 SONET XFP
Xcvr 0	REV 01	740-014279	AA0745N1FX8	XFP-OC192-SR
Xcvr 1	REV 01	740-014279	AA0748N1HN5	XFP-OC192-SR
Xcvr 2	REV 01	740-014279	AA0748N1HT6	XFP-OC192-SR
Xcvr 3	REV 01	740-014279	AA0744N1EC9	XFP-OC192-SR
PIC 1	REV 01	750-010850	JA0329	1x OC-768 SONET SR
MMB 0	REV 04	710-016036	DE9577	ST-MMB2



MMB 1	REV 04	710-016036	DK4060	ST-MMB2
FPC 6	REV 14	710-013037	DV1431	FPC Type 4-ES
CPU	REV 09	710-016744	DT9020	ST-PMB2
PIC 0	REV 11	750-017405	DM6261	4x 10GE (LAN/WAN) XFP
Xcvr 0	REV 01	740-014289	C701XU05Q	XFP-10G-SR
Xcvr 1	REV 01	740-014279	AA0748N1HPT	XFP-10G-LR
Xcvr 2	REV 01	740-014289	T08E19189	XFP-10G-SR
Xcvr 3	REV 01	740-014289	C715XU058	XFP-10G-SR
PIC 1	REV 13	750-017405	DP8772	4x 10GE (LAN/WAN) XFP
Xcvr 0	REV 02	740-011571	C850XJ037	XFP-10G-SR
Xcvr 1	REV 02	740-014289	C839XU0L9	XFP-10G-SR
Xcvr 2	REV 02	740-014289	C834XU05A	XFP-10G-SR
Xcvr 3	REV 02	740-014289	C810XU0CE	XFP-10G-SR
MMB 0	REV 01	710-025563	DT8454	ST-MMB2
MMB 1	REV 01	710-025563	DT8366	ST-MMB2
FPC 7	REV 09	710-007529	HZ7624	FPC Type 3
CPU	REV 15	710-001726	HZ1413	FPC CPU
PIC 0	REV 10	750-012793	DM5627	1x 10GE(LAN/WAN) IQ2
Xcvr 0	REV 02	740-011571	C831XJ062	XFP-10G-SR
PIC 1	REV 01	750-015217	JT6762	8x 1GE(TYPE3), IQ2
Xcvr 0	REV 01	740-011782	P8Q25JU	SFP-SX
Xcvr 1	REV 01	740-011782	P9B0U0K	SFP-SX
PIC 2	REV 01	750-015217	JS4268	8x 1GE(TYPE3), IQ2
Xcvr 0	REV 01	740-011613	AM0812S8XBZ	SFP-SX
Xcvr 1	REV 01	740-011613	AM0812S8XAP	SFP-SX
Xcvr 2	REV 01	740-011613	AM0812S8XBY	SFP-SX
Xcvr 3	REV 01	740-011613	AM0812S8XBX	SFP-SX
Xcvr 4	REV 01	740-011613	P9F1652	SFP-SX
Xcvr 5	REV 01	740-011782	P8Q21YC	SFP-SX
Xcvr 6	REV 01	740-011782	P8Q27HQ	SFP-SX
Xcvr 7	REV 01	740-011613	P8E2SSU	SFP-SX
PIC 3	REV 15	750-009450	NB6790	1x OC-192 SM SR2
MMB 0	REV 03	710-005555	HZ3450	MMB-288mbit
MMB 1	REV 03	710-005555	HZ3415	MMB-288mbit
PPB 0	REV 04	710-002845	HP0887	PPB Type 3
PPB 1	REV 04	710-002845	HW5255	PPB Type 3
SPMB 0	REV 10	710-003229	HX3699	T-series Switch CPU
SPMB 1	REV 12	710-003229	DT3091	T-series Switch CPU
SIB 0	REV 07	710-013074	DS4747	SIB-I8-SF
SIB 1	REV 07	710-013074	DS4942	SIB-I8-SF
SIB 2	REV 07	710-013074	DS4965	SIB-I8-SF
SIB 3	REV 07	710-013074	DS4990	SIB-I8-SF
SIB 4	REV 07	710-013074	DS4944	SIB-I8-SF
Fan Tray 0				Front Top Fan Tray
Fan Tray 1				Front Bottom Fan Tray
Fan Tray 2				Rear Fan Tray -- Rev 2

show chassis hardware  
(TX Matrix Plus  
Router)

user@host> show chassis hardware  
sfc0-re0:

-----  
Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			JN113186EAHB	TXP
Midplane	REV 05	710-022574	TS3822	SFC Midplane
FPM Display	REV 03	710-024027	DW4701	TXP FPM Display
CIP 0	REV 05	710-023792	DW7998	TXP CIP
CIP 1	REV 05	710-023792	DW7999	TXP CIP
PEM 0	Rev 04	740-027463	UM26367	Power Entry Module
PEM 1	Rev 04	740-027463	UM26346	Power Entry Module
Routing Engine 0	REV 06	740-026942	737A-1081	RE-DUO-2600
Routing Engine 1	REV 06	740-026942	737A-1043	RE-DUO-2600



CB 0	REV 05	710-022606	DW4435	SFC Control Board
CB 1	REV 09	710-022606	DW6100	SFC Control Board
SPMB 0		BUILTIN		SFC Switch CPU
SPMB 1		BUILTIN		SFC Switch CPU
SIB F13 0	REV 04	750-024564	DW5764	F13 SIB
B Board	REV 03	710-023431	DW9053	F13 SIB Mezz
SIB F13 3	REV 04	750-024564	DW5785	F13 SIB
B Board	REV 03	710-023431	DW9030	F13 SIB Mezz
SIB F13 6				
SIB F13 8	REV 04	750-024564	DW5752	F13 SIB
B Board	REV 03	710-023431	DW9051	F13 SIB Mezz
SIB F13 11	REV 04	750-024564	DW5782	F13 SIB
B Board	REV 03	710-023431	DW9058	F13 SIB Mezz
SIB F13 12	REV 03	750-024564	DT9466	F13 SIB
B Board	REV 02	710-023431	DT6556	F13 SIB Mezz
SIB F2S 0/0	REV 05	710-022603	DW7898	F2S SIB
B Board	REV 05	710-023787	DW7625	F2S SIB Mezz
SIB F2S 0/2	REV 05	710-022603	DW7811	F2S SIB
B Board	REV 05	710-023787	DW7550	F2S SIB Mezz
SIB F2S 0/4	REV 04	710-022603	DW4873	F2S SIB
B Board	REV 05	710-023787	DW8509	F2S SIB Mezz
SIB F2S 0/6	REV 04	710-022603	DW4867	F2S SIB
B Board	REV 05	710-023787	DW8472	F2S SIB Mezz
SIB F2S 1/0	REV 04	710-022603	DW4871	F2S SIB
B Board	REV 05	710-023787	DW8497	F2S SIB Mezz
SIB F2S 1/2	REV 05	710-022603	DW7868	F2S SIB
B Board	REV 05	710-023787	DW7551	F2S SIB Mezz
SIB F2S 1/4	REV 04	710-022603	DW4854	F2S SIB
B Board	REV 05	710-023787	DW8496	F2S SIB Mezz
SIB F2S 1/6	REV 05	710-022603	DW7889	F2S SIB
B Board	REV 05	710-023787	DW7496	F2S SIB Mezz
SIB F2S 2/0	REV 04	710-022603	DW4852	F2S SIB
B Board	REV 05	710-023787	DW8498	F2S SIB Mezz
SIB F2S 2/2	REV 04	710-022603	DW4845	F2S SIB
B Board	REV 05	710-023787	DW8457	F2S SIB Mezz
SIB F2S 2/4	REV 05	710-022603	DW7802	F2S SIB
B Board	REV 05	710-023787	DW7562	F2S SIB Mezz
SIB F2S 2/6	REV 04	710-022603	DW4822	F2S SIB
B Board	REV 05	710-023787	DW8467	F2S SIB Mezz
SIB F2S 3/0	REV 05	710-022603	DW7815	F2S SIB
B Board	REV 05	710-023787	DW7518	F2S SIB Mezz
SIB F2S 3/2	REV 03	710-022603	DV0068	F2S SIB
B Board	REV 03	710-023787	DT9974	F2S SIB Mezz
SIB F2S 3/4	REV 05	710-022603	DW7874	F2S SIB
B Board	REV 05	710-023787	DW7601	F2S SIB Mezz
SIB F2S 3/6	REV 03	710-022603	DV0033	F2S SIB
B Board	REV 03	710-023787	DT9969	F2S SIB Mezz
SIB F2S 4/0	REV 03	710-022603	DV0043	F2S SIB
B Board	REV 03	710-023787	DT9948	F2S SIB Mezz
SIB F2S 4/2	REV 05	710-022603	DW5446	F2S SIB
B Board	REV 05	710-023787	DW7611	F2S SIB Mezz
SIB F2S 4/4	REV 04	710-022603	DW4826	F2S SIB
B Board	REV 05	710-023787	DW8458	F2S SIB Mezz
SIB F2S 4/6	REV 03	710-022603	DV0026	F2S SIB
B Board	REV 03	710-023787	DT9963	F2S SIB Mezz
Fan Tray 0	REV 02	760-024497	DR8290	Front Fan Tray
Fan Tray 1	REV 02	760-024497	DR8293	Front Fan Tray
Fan Tray 2	REV 05	760-024502	DR8280	Rear Fan Tray
Fan Tray 3				
Fan Tray 4	REV 05	760-024502	DR8276	Rear Fan Tray
Fan Tray 5	REV 02	760-024502	DP5643	Rear Fan Tray



1cc0-re0:

-----  
Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			JN11036F8AHA	T1600
Midplane	REV 03	710-017247	RC3799	T-series Backplane
FPM GBUS	REV 10	710-002901	DP7009	T640 FPM Board
FPM Display	REV 01	710-021387	DN7026	T1600 FPM Display
CIP	REV 06	710-002895	DP6024	T-series CIP
PEM 1	Rev 02	740-023211	WA50019	Power Entry Module 4x60A
SCG 0	REV 15	710-003423	DR6757	T640 Sonet Clock Gen.
SCG 1	REV 15	710-003423	DS2225	T640 Sonet Clock Gen.
Routing Engine 0	REV 01	740-026941	737F-1040	RE-DUO-1800
Routing Engine 1	REV 01	740-026941	737F-1016	RE-DUO-1800
CB 0	REV 06	710-022597	DX4011	LCC Control Board
CB 1	REV 06	710-022597	DX4017	LCC Control Board
FPC 1	REV 07	710-013035	DN5847	FPC Type 3-ES
CPU	REV 08	710-016744	DP2570	ST-PMB2
PIC 0	REV 05	750-015217	DB0418	8x 1GE(TYPE3), IQ2
Xcvr 0	REV 01	740-011782	P8Q27ZG	SFP-SX
Xcvr 1		NON-JNPR	PDA1U0D	SFP-SX
Xcvr 2	REV 01	740-011613	P9F1ALW	SFP-SX
Xcvr 3	REV 01	740-011782	PBA403V	SFP-SX
Xcvr 4		NON-JNPR	PDE09DP	SFP-SX
Xcvr 5	REV 01	740-011782	PCH2P4K	SFP-SX
Xcvr 6	REV 01	740-011782	PB94K0F	SFP-SX
Xcvr 7	REV 01	740-011782	PBA2R2A	SFP-SX
PIC 1	REV 03	750-004424	HJ4020	1x 10GE(LAN), DWDM
PIC 2	REV 01	750-003336	HG6073	4x OC-48 SONET, SMSR
MMB 0	REV 04	710-016036	DP3401	ST-MMB2
FPC 3	REV 12	710-013037	DR1169	FPC Type 4-ES
CPU	REV 08	710-016744	DP9429	ST-PMB2
PIC 0	REV 02	750-010850	JA0332	1x OC-768 SONET SR
MMB 0	REV 04	710-016036	DR0628	ST-MMB2
MMB 1	REV 04	710-016036	DR0592	ST-MMB2
FPC 4	REV 05	710-021534	DR7350	FPC Type 1-ES
CPU	REV 08	710-016744	DP8096	ST-PMB2
PIC 0	REV 04	750-014627	DP9171	4x OC-3 1x OC-12 SFP
Xcvr 0	REV 02	740-011615	PDE2RVR	SFP-SR
PIC 1	REV 22	750-005634	DS5815	1x CHOC12 IQ SONET, SMIR
PIC 2	REV 09	750-002911	CF4539	4x F/E, 100 BASE-TX
PIC 3	REV 08	750-021652	DR2827	1x CHOC12 IQE SONET
Xcvr 0		NON-JNPR	8	UNKNOWN
MMB 0	REV 04	710-016036	DR0809	ST-MMB2
FPC 5	REV 07	710-007529	HS5608	FPC Type 3
CPU	REV 15	710-001726	HX4351	FPC CPU
PIC 0	REV 14	750-009567	WJ8961	1x 10GE(LAN), XENPAK
Xcvr 0	REV 01	740-013170	J05K05961	XENPAK-LR
PIC 1	REV 16	750-007141	JJ8146	10x 1GE(LAN), 1000 BASE
Xcvr 1	REV 01	740-011613	P9F117T	SFP-SX
Xcvr 2	REV 01	740-011782	PBA2VCL	SFP-SX
Xcvr 3	REV 01	740-011782	PB83DRB	SFP-SX
Xcvr 4	REV 01	740-011613	AM0812S8UP8	SFP-SX
PIC 2	REV 12	750-009567	WF3566	1x 10GE(LAN), XENPAK
Xcvr 0	REV 02	740-013170	T07C94489	XENPAK-LR
MMB 0	REV 03	710-005555	HZ1907	MMB-288mbit
MMB 1	REV 03	710-005555	HW5283	MMB-288mbit
PPB 0	REV 04	710-002845	HZ7717	PPB Type 3



PPB 1	REV 04	710-002845	HS0110	PPB Type 3
FPC 6	REV 07	710-013035	DP7486	FPC Type 3-ES
CPU	REV 08	710-016744	DP2545	ST-PMB2
PIC 0	REV 09	750-009567	NE6323	1x 10GE(LAN),XENPAK
Xcvr 0	REV 02	740-013170	T09C71959	XENPAK-LR
PIC 1	REV 06	750-015217	DN4775	8x 1GE(TYPE3), IQ2
Xcvr 0	REV 01	740-011782	P7E0T6M	SFP-SX
Xcvr 1	REV 01	740-011613	AM0812S8XAY	SFP-SX
Xcvr 2	REV 01	740-011782	P7E0T6J	SFP-SX
Xcvr 3	REV 01	740-011782	PCH2P7D	SFP-SX
Xcvr 4	REV 01	740-011782	P9B0QYT	SFP-SX
Xcvr 5	REV 01	740-011613	AM0812S8WQJ	SFP-SX
Xcvr 6	REV 02	740-013111	9301220	SFP-T
Xcvr 7	REV 01	740-011782	P9B0TZ5	SFP-SX
PIC 2	REV 06	750-015217	DM6747	8x 1GE(TYPE3), IQ2
Xcvr 0	REV 01	740-011613	PAP0ZB2	SFP-SX
Xcvr 1	REV 01	740-013111	70191002	SFP-T
Xcvr 6	REV 01	740-011782	PBA29H8	SFP-SX
Xcvr 7	REV 01	740-011613	AM0812S8WQG	SFP-SX
MMB 0	REV 04	710-016036	DP3238	ST-MMB2
FPC 7	REV 03	710-021540	DV3154	FPC Type 2-ES
CPU	REV 09	710-016744	DT9053	ST-PMB2
PIC 0	REV 13	750-001901	HB4225	4x OC-12 SONET, SMIR
PIC 1	REV 05	750-001900	AD3644	1x OC-48 SONET, SMSR
PIC 2	REV 10	750-008155	HV0335	2x G/E IQ, 1000 BASE
Xcvr 0	REV 01	740-011782	PCH2UKF	SFP-SX
Xcvr 1	REV 01	740-011782	PCH2V19	SFP-SX
PIC 3	REV 03	750-014638	JS9493	1x OC-48-12-3 SFP
Xcvr 0	REV 01	740-011785	P6Q0ENK	SFP-SR
MMB 0	REV 05	710-016036	DP3323	ST-MMB2
SPMB 0	REV 04	710-023321	DX3004	LCC Switch CPU
SPMB 1	REV 04	710-023321	DX3009	LCC Switch CPU
SIB 0	REV 07	710-022594	DW4195	LCC SIB
B Board	REV 07	710-023185	DW3930	LCC SIB Mezz
SIB 1	REV 07	710-022594	DW4179	LCC SIB
B Board	REV 07	710-023185	DW3919	LCC SIB Mezz
SIB 2				
SIB 3	REV 06	710-022594	DT8251	LCC SIB
B Board	REV 06	710-023185	DT5792	LCC SIB Mezz
SIB 4	REV 08	710-022594	DW8014	LCC SIB
B Board	REV 07	710-023185	DW3917	LCC SIB Mezz
Fan Tray 0				Front Top Fan Tray
Fan Tray 1				Front Bottom Fan Tray
Fan Tray 2				Rear Fan Tray -- Rev 3

lcc1-re0:

-----  
Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			JN1102270AHA	T1600
Midplane	REV 04	710-017247	RC5358	T-series Backplane
FPM GBUS	REV 10	710-002901	DS3443	T640 FPM Board
FPM Display	REV 01	710-021387	DS6411	T1600 FPM Display
CIP	REV 06	710-002895	DS4235	T-series CIP
PEM 0	Rev 02	740-023211	VM82438	Power Entry Module 4x60A
SCG 0	REV 15	710-003423	DS6649	T640 Sonet Clock Gen.
SCG 1	REV 15	710-003423	DR6775	T640 Sonet Clock Gen.
Routing Engine 0	REV 01	740-026941	737F-1083	RE-DUO-1800
Routing Engine 1	REV 01	740-026941	737F-1104	RE-DUO-1800
CB 0	REV 06	710-022597	DW8542	LCC Control Board
CB 1	REV 06	710-022597	DW8530	LCC Control Board



FPC 0	REV 02	710-010845	JE2392	FPC Type 4
CPU	REV 02	710-011481	JF6820	FPC CPU-Enhanced
PIC 0	REV 11	750-017405	DP7259	4x 10GE (LAN/WAN) XFP
Xcvr 0	REV 01	740-014279	AA0741N1C8T	XFP-10G-LR
Xcvr 1	REV 01	740-014279	AA0746N1GAM	XFP-10G-LR
Xcvr 2	REV 01	740-014279	AA0747N1H0B	XFP-10G-LR
Xcvr 3	REV 01	740-014279	AA0748N1HZ5	XFP-10G-LR
MMB 0	REV 03	710-010842	HY7601	ST-MMB
FPC 1	REV 16	710-013037	BBAA7398	FPC Type 4-ES
CPU	REV 09	710-016744	BBAA2329	ST-PMB2
PIC 0	REV 03	711-029996	EB1575	100GE
PIC 1	REV 06	750-034781	EB9980	100GE CFP
MMB 0	REV 04	710-025563	BBAA5325	ST-MMB2
MMB 1	REV 04	710-025563	BBAA5444	ST-MMB2
FPC 2	REV 16	710-013037	BBAA7185	FPC Type 4-ES
CPU	REV 09	710-016744	BBAA3522	ST-PMB2
PIC 0	REV 03	711-029996	EB1557	100GE
PIC 1	REV 05	750-034781	EB4660	100GE CFP
Xcvr 0	REV 0	740-032210	J10F73666	CFP-100G-LR4
BRIDGE 0	REV 02	711-029995	EB2237	100GE Bridge Board
MMB 0	REV 04	710-025563	BBAA5347	ST-MMB2
MMB 1	REV 04	710-025563	BBAA5401	ST-MMB2
FPC 3	REV 10	710-021534	DZ0941	FPC Type 1-ES
CPU	REV 09	710-016744	DY6364	ST-PMB2
PIC 0	REV 13	750-012266	DK9192	4x 1GE(LAN), IQ2
Xcvr 0	REV 01	740-011613	AM0812S8WVD	SFP-SX
Xcvr 1		NON-JNPR	PDD63Q4	SFP-SX
Xcvr 2		NON-JNPR	PDE4G54	SFP-SX
Xcvr 3		NON-JNPR	PD40MAG	SFP-SX
PIC 1	REV 01	750-007641	HJ2003	1x G/E IQ, 1000 BASE
Xcvr 0	REV 01	740-011613	AM0812S8WVG	SFP-SX
PIC 3	REV 17	750-007444	JB6873	1x CHSTM1 IQ SDH, SMIR
MMB 0	REV 04	710-025563	DZ0281	ST-MMB2
FPC 4	REV 06	710-013035	DK0614	FPC Type 3-ES
CPU	REV 07	710-016744	DK1616	ST-PMB2
PIC 0	REV 22	750-007141	DM1870	10x 1GE(LAN), 1000 BASE
Xcvr 0	REV 01	740-011782	PCL3UKW	SFP-SX
Xcvr 1	REV 01	740-011782	P7E0T73	SFP-SX
Xcvr 2	REV 01	740-007326	P4TOWLR	SFP-SX
Xcvr 3	REV 01	740-011782	PAR1LRL	SFP-SX
Xcvr 4	REV 01	740-011782	P9MOU3Z	SFP-SX
Xcvr 5	REV 01	740-011782	P9MOU0C	SFP-SX
Xcvr 6	REV 01	740-011782	P9M0TLG	SFP-SX
Xcvr 7	REV 01	740-011782	P9MOU0F	SFP-SX
Xcvr 8	REV 01	740-011613	PFA6LAP	SFP-SX
Xcvr 9	REV 01	740-011782	PCH2P0U	SFP-SX
PIC 1	REV 16	750-009450	CV2565	1x OC-192 SM SR2
PIC 2	REV 05	750-004424	HH3057	1x 10GE(LAN), 10GBASE-LR
PIC 3	REV 12	750-013423	DP0403	MultiServices 500
MMB 0	REV 04	710-016036	DK1988	ST-MMB2
FPC 5	REV 07	710-013560	DR0004	E2-FPC Type 3
CPU	REV 05	710-013563	DR0089	FPC CPU-Enhanced
PIC 0	REV 11	750-012793	DR6107	1x 10GE(LAN/WAN) IQ2
Xcvr 0	REV 01	740-014289	C743XU074	XFP-10G-SR
PIC 1	REV 01	750-004695	HD5980	1x Tunnel
PIC 2	REV 32	750-003700	DL3770	1x OC-192 12xMM VSR
PIC 3	REV 12	750-009553	WB8901	4x OC-48 SONET
Xcvr 0	REV 01	740-011785	P9D1GTQ	SFP-SR
Xcvr 1	REV 01	740-011785	PDSOMMB	SFP-SR



Xcvr 3	REV 01	740-011785	PDE1KXP	SFP-SR
MMB 0	REV 07	710-010171	DP7374	MMB-5M3-288mbit
MMB 1	REV 07	710-010171	DP7404	MMB-5M3-288mbit
FPC 6	REV 07	710-013035	DM0994	FPC Type 3-ES
CPU	REV 07	710-016744	DM3651	ST-PMB2
PIC 0	REV 07	750-015217	DN4743	8x 1GE(TYPE3), IQ2
Xcvr 3	REV 01	740-011613	AM0812S8XB0	SFP-SX
Xcvr 4	REV 01	740-011782	PB829RB	SFP-SX
Xcvr 5	REV 01	740-011782	P8J1SYX	SFP-SX
PIC 1	REV 03	750-003336	HJ9954	4x OC-48 SONET, SMSR
PIC 3	REV 02	750-012793	JM7665	1x 10GE(LAN/WAN) IQ2
MMB 0	REV 04	710-016036	DN6913	ST-MMB2
FPC 7	REV 08	710-010845	JM3958	FPC Type 4
CPU	REV 04	710-011481	JK3669	FPC CPU-Enhanced
PIC 0	REV 11	750-017405	DP8837	4x 10GE (LAN/WAN) XFP
Xcvr 1	REV 01	740-014279	753019A00277	XFP-10G-LR
Xcvr 2	REV 02	740-011571	C850XJ00P	XFP-10G-SR
Xcvr 3	REV 01	740-014279	AA0813N1RTG	XFP-10G-LR
MMB 0	REV 04	710-010842	JN1971	ST-MMB
SPMB 0	REV 04	710-023321	DW3629	LCC Switch CPU
SPMB 1	REV 04	710-023321	DW3621	LCC Switch CPU
SIB 0	REV 07	710-022594	DW4200	LCC SIB
B Board	REV 07	710-023185	DW3932	LCC SIB Mezz
SIB 1	REV 07	710-022594	DW4193	LCC SIB
B Board	REV 07	710-023185	DW3904	LCC SIB Mezz
SIB 2				
SIB 3	REV 07	710-022594	DW4210	LCC SIB
B Board	REV 06	710-023185	DT5780	LCC SIB Mezz
SIB 4	REV 08	710-022594	DW8019	LCC SIB
B Board	REV 06	710-023185	DT5795	LCC SIB Mezz
Fan Tray 0				Front Top Fan Tray
Fan Tray 1				Front Bottom Fan Tray
Fan Tray 2				Rear Fan Tray -- Rev 3

show chassis hardware  
sfc (TX Matrix Plus  
Router)

user@host> show chassis hardware sfc 0  
sfc0-re0:

-----  
Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			JN112F007AHB	TXP
Midplane	REV 05	710-022574	TS4027	SFC Midplane
FPM Display	REV 03	710-024027	DX0282	TXP FPM Display
CIP 0	REV 04	710-023792	DW4889	TXP CIP
CIP 1	REV 04	710-023792	DW4887	TXP CIP
PEM 0	Rev 07	740-027463	UM26368	Power Entry Module
Routing Engine 0	REV 01	740-026942	737A-1064	SFC RE
Routing Engine 1	REV 01	740-026942	737A-1082	SFC RE
CB 0	REV 09	710-022606	DW6099	SFC Control Board
CB 1	REV 09	710-022606	DW6096	SFC Control Board
SPMB 0		BUILTIN		SFC Switch CPU
SPMB 1		BUILTIN		SFC Switch CPU
SIB F13 0	REV 04	710-022600	DX0841	F13 SIB
B Board	REV 03	710-023431	DX0966	F13 SIB Mezz
SIB F13 1	REV 04	750-024564	DW5776	F13 SIB
B Board	REV 03	710-023431	DW9028	F13 SIB
SIB F13 3	REV 04	750-024564	DW5762	F13 SIB
B Board	REV 03	710-023431	DW9059	F13 SIB
SIB F13 4	REV 04	750-024564	DW5797	F13 SIB
B Board	REV 03	710-023431	DW9041	F13 SIB
SIB F13 6	REV 04	750-024564	DW5770	F13 SIB
B Board	REV 03	710-023431	DW9079	F13 SIB Mezz



SIB F13 7	REV 04	750-024564	DW5758	F13 SIB
B Board	REV 03	710-023431	DW9047	F13 SIB
SIB F13 8	REV 04	750-024564	DW5761	F13 SIB
B Board	REV 03	710-023431	DW9043	F13 SIB Mezz
SIB F13 9	REV 04	750-024564	DW5754	F13 SIB
B Board	REV 03	710-023431	DW9078	F13 SIB Mezz
SIB F13 11	REV 04	710-022600	DX0826	F13 SIB
B Board	REV 03	710-023431	DX0967	F13 SIB Mezz
SIB F13 12	REV 04	750-024564	DW5794	F13 SIB
B Board	REV 03	710-023431	DW9044	F13 SIB Mezz
SIB F2S 0/0	REV 05	710-022603	DW7897	F2S SIB
B Board	REV 05	710-023787	DW7657	NEO PMB
SIB F2S 0/2	REV 05	710-022603	DW7833	F2S SIB
B Board	REV 05	710-023787	DW7526	NEO PMB
SIB F2S 0/4	REV 05	710-022603	DW7875	F2S SIB
B Board	REV 05	710-023787	DW7588	NEO PMB
SIB F2S 0/6	REV 05	710-022603	DW7860	F2S SIB
B Board	REV 05	710-023787	DW7589	NEO PMB
SIB F2S 1/0	REV 04	710-022603	DW4820	F2S SIB
B Board	REV 05	710-023787	DW8510	NEO PMB
SIB F2S 1/2	REV 05	710-022603	DW7849	F2S SIB
B Board	REV 05	710-023787	DW7525	NEO PMB
SIB F2S 1/4	REV 05	710-022603	DW7927	F2S SIB
B Board	REV 05	710-023787	DW7556	F2S SIB Mezz
SIB F2S 1/6	REV 05	710-022603	DW7866	F2S SIB
B Board	REV 05	710-023787	DW7651	NEO PMB
SIB F2S 2/0	REV 05	710-022603	DW7880	F2S SIB
B Board	REV 05	710-023787	DW7523	NEO PMB
SIB F2S 2/2	REV 05	710-022603	DW7895	F2S SIB
B Board	REV 05	710-023787	DW7591	NEO PMB
SIB F2S 2/4	REV 05	710-022603	DW7907	F2S SIB
B Board	REV 05	710-023787	DW7590	NEO PMB
SIB F2S 2/6	REV 05	710-022603	DW7785	F2S SIB
B Board	REV 05	710-023787	DW7524	NEO PMB
SIB F2S 3/0	REV 05	710-022603	DW7782	F2S SIB
B Board	REV 05	710-023787	DW7634	NEO PMB
SIB F2S 3/2	REV 05	710-022603	DW7793	F2S SIB
B Board	REV 05	710-023787	DW7548	NEO PMB
SIB F2S 3/4	REV 05	710-022603	DW7779	F2S SIB
B Board	REV 05	710-023787	DW7587	NEO PMB
SIB F2S 3/6	REV 05	710-022603	DW7930	F2S SIB
B Board	REV 05	710-023787	DW7505	NEO PMB
SIB F2S 4/0	REV 05	710-022603	DW7867	F2S SIB
B Board	REV 05	710-023787	DW7656	NEO PMB
SIB F2S 4/2	REV 05	710-022603	DW7917	F2S SIB
B Board	REV 05	710-023787	DW7640	NEO PMB
SIB F2S 4/4	REV 05	710-022603	DW7929	F2S SIB
B Board	REV 05	710-023787	DW7643	NEO PMB
SIB F2S 4/6	REV 05	710-022603	DW7870	F2S SIB
B Board	REV 05	710-023787	DW7635	NEO PMB
Fan Tray 0	REV 06	760-024497	DV7831	Front Fan Tray
Fan Tray 1	REV 06	760-024497	DV9614	Front Fan Tray
Fan Tray 2	REV 06	760-024502	DV9618	Rear Fan Tray
Fan Tray 3	REV 06	760-024502	DV9616	Rear Fan Tray
Fan Tray 4	REV 06	760-024502	DV7807	Rear Fan Tray
Fan Tray 5	REV 06	760-024502	DV7828	Rear Fan Tray

show chassis hardware  
extensive (TX Matrix  
Plus Router)

user@host> show chassis hardware extensive  
sfc0-re0:

-----  
Hardware inventory:



Item	Version	Part number	Serial number	Description
Chassis			JN112F007AHB	TXP
Jedec Code:	0x7fb0		EEPROM Version:	0x02
			S/N:	JN112F007AHB
Assembly ID:	0x052c		Assembly Version:	00.00
Date:	00-00-0000		Assembly Flags:	0x00
ID:	TXP			
Board Information Record:				
Address 0x00:	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00			
I2C Hex Data:				
Address 0x00:	7f b0 02 ff 05 2c 00 00 00 00 00 00 00 00 00 00			
Address 0x10:	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00			
Address 0x20:	4a 4e 31 31 32 46 30 30 37 41 48 42 00 00 00 00			
Address 0x30:	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00			
Address 0x40:	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00			
Address 0x50:	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00			
Address 0x60:	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00			
Address 0x70:	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00			
Midplane	REV 05	710-022574	TS4027	SFC Midplane
Jedec Code:	0x7fb0		EEPROM Version:	0x01
P/N:	710-022574		S/N:	S/N TS4027
Assembly ID:	0x0962		Assembly Version:	01.05
Date:	03-23-2009		Assembly Flags:	0x00
Version:	REV 05			
ID:	SFC Midplane			
Board Information Record:				
Address 0x00:	ad 01 ff ff 00 1d b5 14 00 00 ff ff ff ff ff ff			
I2C Hex Data:				
Address 0x00:	7f b0 01 ff 09 62 01 05 52 45 56 20 30 35 00 00			
Address 0x10:	00 00 00 00 37 31 30 2d 30 32 32 35 37 34 00 00			
Address 0x20:	53 2f 4e 20 54 53 34 30 32 37 00 00 00 17 03 07			
Address 0x30:	d9 ff ff ff ad 01 ff ff 00 1d b5 14 00 00 ff ff			
Address 0x40:	ff ff ff ff 00 ff ff ff ff ff ff ff ff ff ff ff			
Address 0x50:	ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff			
Address 0x60:	ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff			
Address 0x70:	ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff			
FPM Display	REV 03	710-024027	DX0282	TXP FPM Display
Jedec Code:	0x7fb0		EEPROM Version:	0x01
P/N:	710-024027		S/N:	S/N DX0282
Assembly ID:	0x096c		Assembly Version:	01.03
Date:	02-10-2009		Assembly Flags:	0x00
Version:	REV 03			
ID:	TXP FPM Display		FRU Model Number:	CRAFT-TXP
Board Information Record:				
Address 0x00:	ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff			
I2C Hex Data:				
Address 0x00:	7f b0 01 ff 09 6c 01 03 52 45 56 20 30 33 00 00			
Address 0x10:	00 00 00 00 37 31 30 2d 30 32 34 30 32 37 00 00			
Address 0x20:	53 2f 4e 20 44 58 30 32 38 32 00 00 00 0a 02 07			
Address 0x30:	d9 ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff			
Address 0x40:	ff ff ff ff 01 00 00 00 00 00 00 00 00 00 00 43			
Address 0x50:	52 41 46 54 2d 54 58 50 00 00 00 00 00 00 00			
Address 0x60:	00 00 00 00 00 00 ff ff ff ff ff ff ff ff ff ff			
Address 0x70:	ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff			
CIP 0	REV 04	710-023792	DW4889	TXP CIP
Jedec Code:	0x7fb0		EEPROM Version:	0x01
P/N:	710-023792		S/N:	S/N DW4889
Assembly ID:	0x0969		Assembly Version:	01.04
Date:	01-26-2009		Assembly Flags:	0x00
Version:	REV 04			
ID:	TXP CIP		FRU Model Number:	CIP-TXP



## Board Information Record:

Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff

show chassis hardware  
clei-models (TX Matrix  
Plus Router)

user@host&gt; show chassis hardware clei-models

sfc0-re0:

-----  
Hardware inventory:

Item	Version	Part number	CLEI code	FRU model number
Midplane	REV 05	710-022574		CHAS-BP-TXP-S
FPM Display	REV 03	710-024027		CRAFT-TXP-S
CIP 0	REV 05	710-023792		CIP-TXP-S
CIP 1	REV 05	710-023792		CIP-TXP-S
PEM 0	Rev 04	740-027463	IPUPAFGKTA	PWR-TXP-7-60-DC
PEM 1	Rev 04	740-027463	IPUPAFGKTA	PWR-TXP-7-60-DC
Routing Engine 0	REV 06	740-026942		RE-DUO-C2600-16G-S
Routing Engine 1	REV 06	740-026942		RE-DUO-C2600-16G-S
CB 0	REV 05	710-022606		CB-TXP-S
CB 1	REV 09	710-022606		CB-TXP-S
SIB F13 0	REV 04	750-024564		SIB-TXP-F13
SIB F13 3	REV 04	750-024564		SIB-TXP-F13
SIB F13 8	REV 04	750-024564		SIB-TXP-F13
SIB F13 11	REV 04	750-024564		SIB-TXP-F13
SIB F13 12	REV 03	750-024564		SIB-TXP-F13
SIB F2S 0/0	REV 05	710-022603		SIB-TXP-F2S-S
SIB F2S 0/2	REV 05	710-022603		SIB-TXP-F2S-S
SIB F2S 0/4	REV 04	710-022603		SIB-TXP-F2S-S
SIB F2S 0/6	REV 04	710-022603		SIB-TXP-F2S-S
SIB F2S 1/0	REV 04	710-022603		SIB-TXP-F2S-S
SIB F2S 1/2	REV 05	710-022603		SIB-TXP-F2S-S
SIB F2S 1/4	REV 04	710-022603		SIB-TXP-F2S-S
SIB F2S 1/6	REV 05	710-022603		SIB-TXP-F2S-S
SIB F2S 2/0	REV 04	710-022603		SIB-TXP-F2S-S
SIB F2S 2/2	REV 04	710-022603		SIB-TXP-F2S-S
SIB F2S 2/4	REV 05	710-022603		SIB-TXP-F2S-S
SIB F2S 2/6	REV 04	710-022603		SIB-TXP-F2S-S
SIB F2S 3/0	REV 05	710-022603		SIB-TXP-F2S-S
SIB F2S 3/2	REV 03	710-022603		SIB-TXP-F2S-S
SIB F2S 3/4	REV 05	710-022603		SIB-TXP-F2S-S
SIB F2S 3/6	REV 03	710-022603		SIB-TXP-F2S-S
SIB F2S 4/0	REV 03	710-022603		SIB-TXP-F2S-S
SIB F2S 4/2	REV 05	710-022603		SIB-TXP-F2S-S
SIB F2S 4/4	REV 04	710-022603		SIB-TXP-F2S-S
SIB F2S 4/6	REV 03	710-022603		SIB-TXP-F2S-S
Fan Tray 0	REV 02	760-024497		FANTRAY-TXP-H-S
Fan Tray 1	REV 02	760-024497		FANTRAY-TXP-H-S
Fan Tray 2	REV 05	760-024502		FANTRAY-TXP-V-S
Fan Tray 3				
Fan Tray 4	REV 05	760-024502		FANTRAY-TXP-V-S
Fan Tray 5	REV 02	760-024502		FANTRAY-TXP-V-S

lcc0-re0:

-----  
Hardware inventory:

Item	Version	Part number	CLEI code	FRU model number
Midplane	REV 03	710-017247		CHAS-BP-T1600-S
FPM Display	REV 01	710-021387		CRAFT-T1600-S
CIP	REV 06	710-002895		CIP-L-T640-S
PEM 1	Rev 02	740-023211	IPUPAC8KTA	PWR-T1600-4-60-DC-S
SCG 0	REV 15	710-003423		SCG-T-S
SCG 1	REV 15	710-003423		SCG-T-S
Routing Engine 0	REV 01	740-026941		RE-DUO-C1800-8G-S



Routing Engine 1	REV 01	740-026941	RE-DUO-C1800-8G-S
CB 0	REV 06	710-022597	CB-LCC-S
CB 1	REV 06	710-022597	CB-LCC-S
FPC 1	REV 07	710-013035	T640-FPC3-ES
PIC 0	REV 05	750-015217	PC-8GE-TYPE3-SFP-IQ2
PIC 1	REV 03	750-004424	PC-1XGE-LR
PIC 2	REV 01	750-003336	PC-40C48-SON-SMSR
FPC 3	REV 12	710-013037	T1600-FPC4-ES
PIC 0	REV 02	750-010850	PD-10C768-SON-SR
FPC 4	REV 05	710-021534	T640-FPC1-ES
PIC 0	REV 04	750-014627	PB-40C3-10C12-SON-SFP
PIC 1	REV 22	750-005634	PB-1CHOC12SMIR-QPP
PIC 2	REV 09	750-002911	PB-4FE-TX
PIC 3	REV 08	750-021652	PB-1CHOC12-STM4-IQE-SFP
FPC 5	REV 07	710-007529	T640-FPC3
PIC 0	REV 14	750-009567	PC-1XGE-XENPAK
PIC 1	REV 16	750-007141	PC-10GE-SFP
PIC 2	REV 12	750-009567	PC-1XGE-XENPAK
FPC 6	REV 07	710-013035	T640-FPC3-ES
PIC 0	REV 09	750-009567	PC-1XGE-XENPAK
PIC 1	REV 06	750-015217	PC-8GE-TYPE3-SFP-IQ2
PIC 2	REV 06	750-015217	PC-8GE-TYPE3-SFP-IQ2
FPC 7	REV 03	710-021540	T640-FPC2-ES
PIC 0	REV 13	750-001901	PB-40C12-SON-SMIR
PIC 1	REV 05	750-001900	PB-10C48-SON-SMSR
PIC 2	REV 10	750-008155	PB-2GE-SFP-QPP
PIC 3	REV 03	750-014638	PB-10C48-SON-B-SFP
SIB 0	REV 07	710-022594	SIB-TXP-T1600-S
SIB 1	REV 07	710-022594	SIB-TXP-T1600-S
SIB 3	REV 06	710-022594	SIB-TXP-T1600-S
SIB 4	REV 08	710-022594	SIB-TXP-T1600-S
Fan Tray 0			FANTRAY-T-S
Fan Tray 1			FANTRAY-T-S
Fan Tray 2			FANTRAY-TXP-R-S

lcc1-re0:

-----  
Hardware inventory:

Item	Version	Part number	CLEI code	FRU model number
Midplane	REV 04	710-017247		CHAS-BP-T1600-S
FPM Display	REV 01	710-021387		CRAFT-T1600-S
CIP	REV 06	710-002895		CIP-L-T640-S
PEM 0	Rev 02	740-023211	IPUPAC8KTA	PWR-T1600-4-60-DC-S
SCG 0	REV 15	710-003423		SCG-T-S
SCG 1	REV 15	710-003423		SCG-T-S
Routing Engine 0	REV 01	740-026941		RE-DUO-C1800-8G-S
Routing Engine 1	REV 01	740-026941		RE-DUO-C1800-8G-S
CB 0	REV 06	710-022597		CB-LCC-S
CB 1	REV 06	710-022597		CB-LCC-S
FPC 0	REV 02	710-010845		T640-FPC4-ES
PIC 0	REV 11	750-017405		PD-4XGE-XFP
FPC 1	REV 16	710-013037		T1600-FPC4-ES
PIC 1	REV 06	750-034781		PD-1CE-CFP
FPC 2	REV 16	710-013037		T1600-FPC4-ES
PIC 1	REV 05	750-034781		PD-1CE-CFP
FPC 3	REV 10	710-021534		T640-FPC1-ES
PIC 0	REV 13	750-012266		PB-4GE-TYPE1-SFP-IQ2
PIC 1	REV 01	750-007641		PE-1GE-SFP-QPP
PIC 3	REV 17	750-007444		PB-1CHSTM1-SMIR-QPP
FPC 4	REV 06	710-013035		T640-FPC3-ES
PIC 0	REV 22	750-007141		PC-10GE-SFP



PIC 1	REV 16	750-009450	PC-10C192-SON-SR2
PIC 2	REV 05	750-004424	PC-1XGE-LR
PIC 3	REV 12	750-013423	PC-MS-500-3
FPC 5	REV 07	710-013560	T640-FPC3-E2
PIC 0	REV 11	750-012793	PC-1XGE-TYPE3-XFP-IQ2
PIC 1	REV 01	750-004695	PC-TUNNEL
PIC 2	REV 32	750-003700	PC-10C192-SON-VSR
PIC 3	REV 12	750-009553	PC-40C48-SON-SFP
FPC 6	REV 07	710-013035	T640-FPC3-ES
PIC 0	REV 07	750-015217	PC-8GE-TYPE3-SFP-IQ2
PIC 1	REV 03	750-003336	PC-40C48-SON-SMSR
PIC 3	REV 02	750-012793	PC-1XGE-TYPE3-XFP-IQ2
FPC 7	REV 08	710-010845	T640-FPC4-ES
PIC 0	REV 11	750-017405	PD-4XGE-XFP
SIB 0	REV 07	710-022594	SIB-TXP-T1600-S
SIB 1	REV 07	710-022594	SIB-TXP-T1600-S
SIB 3	REV 07	710-022594	SIB-TXP-T1600-S
SIB 4	REV 08	710-022594	SIB-TXP-T1600-S
Fan Tray 0			FANTRAY-T-S
Fan Tray 1			FANTRAY-T-S
Fan Tray 2			FANTRAY-TXP-R-S

show chassis hardware  
detail (TX Matrix Plus  
Router)

user@host> show chassis hardware detail  
sfc0-re0:

```
-----
Hardware inventory:
Item          Version  Part number  Serial number  Description
Chassis                               JN111B023AHB  TXP
Midplane      REV 01    710-022574   TR7990         SFC Midplane
FPM Display   REV 03    710-024027   DW4699         TXP FPM Display
CIP 0         REV 01    710-023792   DR1437         TXP CIP
CIP 1         REV 02    710-023792   DS4564         TXP CIP
PEM 0         Rev 07    740-027463   UM26360        Power Entry Module
Routing Engine 0 REV 01    740-026942   737A-1024      SFC RE
  ad0 3887 MB SMART CF      200811050193CEB1CEB1 Compact Flash
  ad1 30533 MB SAMSUNG MCBQE32G8MPP-0V SY814A0762 Disk 1
Routing Engine 1 REV 01    740-026942   737A-1024      SFC RE
  ad0 3887 MB SMART CF      20081105004C19A019A0 Compact Flash
  ad1 30533 MB SAMSUNG MCBQE32G8MPP-0V SY814A0794 Disk 1
CB 0          REV 03    710-022606   DR7134         SFC Control Board
CB 1          REV 01    710-022606   DP8890         SFC Control Board
SPMB 0        BUILTIN                      SFC Switch CPU
SPMB 1        BUILTIN                      SFC Switch CPU
SIB F13 0     REV 03    750-024564   DT9478         F13 SIB
  B Board    REV 02    710-023431   DT6554         F13 SIB
SIB F13 1     REV 03    750-024564   DT9454         F13 SIB
  B Board    REV 02    710-023431   DT6551         F13 SIB
SIB F2S 0/0   REV 02    710-022603   DT2838         F2S SIB
  B Board    REV 02    710-023787   DT1725         NEO PMB
SIB F2S 0/2   REV 02    710-022603   DT2824         F2S SIB
  B Board    REV 02    710-023787   DT1706         NEO PMB
SIB F2S 0/4   REV 02    710-022603   DT2822         F2S SIB
  B Board    REV 02    710-023787   DT1696         NEO PMB
SIB F2S 0/6   REV 02    710-022603   DT2823         F2S SIB
  B Board    REV 02    710-023787   DT1717         NEO PMB
SIB F2S 1/0   REV 03    710-022603   DV0059         F2S SIB
  B Board    REV 03    710-023787   DT9942         NEO PMB
SIB F2S 1/2   REV 02    710-022603   DT2826         F2S SIB
  B Board    REV 02    710-023787   DT1713         NEO PMB
SIB F2S 1/4   REV 03    710-022603   DV0092         F2S SIB
  B Board    REV 03    710-023787   DV0000         NEO PMB
```



SIB F2S 1/6	REV 03	710-022603	DV0079	F2S SIB
B Board	REV 03	710-023787	DT9972	NEO PMB
SIB F2S 2/0	REV 03	710-022603	DV0100	F2S SIB
B Board	REV 03	710-023787	DT9925	NEO PMB
SIB F2S 2/2	REV 03	710-022603	DV0050	F2S SIB
B Board	REV 03	710-023787	DV0005	NEO PMB
SIB F2S 2/4	REV 03	710-022603	DV0097	F2S SIB
B Board	REV 03	710-023787	DT9936	NEO PMB
Fan Tray 0	REV 02	760-024497	DR8286	Front Fan Tray
Fan Tray 1	REV 06	760-024497	DV9624	Front Fan Tray
Fan Tray 2	REV 02	760-024502	DR8259	Rear Fan Tray
Fan Tray 3	REV 02	760-024502	DR8270	Rear Fan Tray
Fan Tray 4	REV 02	760-024502	DR8284	Rear Fan Tray
Fan Tray 5	REV 06	760-024502	DV7813	Rear Fan Tray

lcc0-re0:

-----  
Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			JN1101F27AHA	T1600
Midplane	REV 04	710-017247	RC5317	T Series Backplane
FPM GBUS	REV 10	710-002901	DS8197	T640 FPM Board
FPM Display	REV 01	710-021387	DS6433	T1600 FPM Display
CIP	REV 06	710-002895	DS1493	T Series CIP
PEM 0	Rev 08	740-017906	UD26601	Power Entry Module 3x80
SCG 0	REV 15	710-003423	DP5847	T640 Sonet Clock Gen.
SCG 1	REV 15	710-003423	DR0924	T640 Sonet Clock Gen.
Routing Engine 0	REV 01	740-026942	737F-1024	LCC RE
ad0 3887 MB	SMART CF		2008110502B63E513E51	Compact Flash
ad1 30533 MB	SAMSUNG	MCBQE32G8MPP-0V	SY814A1208	Disk 1
Routing Engine 1	REV 01	740-026942	737F-1024	LCC RE
ad0 3887 MB	SMART CF		2008110500F9A8A8A8A8	Compact Flash
ad1 30533 MB	SAMSUNG	MCBQE32G8MPP-0V	SY814A1076	Disk 1
CB 0	REV 05	710-022597	DV4264	LCC Control Board
CB 1	REV 03	710-022597	DP8558	LCC Control Board
FPC 0	REV 14	710-013037	DS9967	FPC Type 4-ES
CPU	REV 08	710-016744	DS3989	ST-PMB2
PIC 0	REV 12	750-013198	DL7506	1x Tunnel
PIC 1	REV 12	750-013198	DL7505	1x Tunnel
MMB 0	REV 01	710-025563	DS8524	ST-MMB2
MMB 1	REV 01	710-025563	DS8373	ST-MMB2
FPC 1	REV 14	710-013037	DT0027	FPC Type 4-ES
CPU	REV 09	710-016744	DS7684	ST-PMB2
PIC 0	REV 12	750-013198	DL7512	1x Tunnel
PIC 1	REV 12	750-013198	DL7498	1x Tunnel
MMB 0	REV 01	710-025563	DS8494	ST-MMB2
MMB 1	REV 01	710-025563	DS8436	ST-MMB2
SPMB 0	REV 04	710-023321	DV3867	LCC Switch CPU
SPMB 1	REV 02	710-023321	DP0238	LCC Switch CPU
SIB 0	REV 06	710-022594	DT8268	LCC SIB
B Board	REV 06	710-023185	DT5791	LCC SIB Mezz
SIB 1	REV 06	710-022594	DT8261	LCC SIB
B Board	REV 06	710-023185	DT5769	LCC SIB Mezz
SIB 2	REV 04	710-022594	DS2315	LCC SIB
B Board	REV 06	710-023185	DT5788	LCC SIB Mezz
SIB 3	REV 06	710-022594	DT8253	LCC SIB
B Board	REV 06	710-023185	DT5811	LCC SIB Mezz
SIB 4	REV 06	710-022594	DT8248	LCC SIB
B Board	REV 06	710-023185	DT5812	LCC SIB Mezz
Fan Tray 0				Front Top Fan Tray
Fan Tray 1				Front Bottom Fan Tray



show chassis hardware  
models (TX Matrix  
Plus Router)

Fan Tray 2

Rear Fan Tray

user@host> show chassis hardware models  
sfc0-re0:

-----  
Hardware inventory:

Item	Version	Part number	Serial number	FRU model number
FPM Display	REV 03	710-024027	DX0282	CRAFT-TXP
CIP 0	REV 04	710-023792	DW4889	CIP-TXP
CIP 1	REV 04	710-023792	DW4887	CIP-TXP
PEM 0	Rev 07	740-027463	UM26368	yyyyyyyyyyyyyyyyyyyy
Routing Engine 0	REV 01	740-026942	737A-1064	RE-TXP-SFC-DU0-2600-16G
Routing Engine 1	REV 01	740-026942	737A-1082	RE-TXP-SFC-DU0-2600-16G
CB 0	REV 09	710-022606	DW6099	CB-TXP
CB 1	REV 09	710-022606	DW6096	CB-TXP
SIB F13 1	REV 04	750-024564	DW5776	SIB-TXP-F13
SIB F13 3	REV 04	750-024564	DW5762	SIB-TXP-F13
SIB F13 4	REV 04	750-024564	DW5797	SIB-TXP-F13
SIB F13 6	REV 04	750-024564	DW5770	SIB-TXP-F13
SIB F13 7	REV 04	750-024564	DW5758	SIB-TXP-F13
SIB F13 8	REV 04	750-024564	DW5761	SIB-TXP-F13
SIB F13 9	REV 04	750-024564	DW5754	SIB-TXP-F13
SIB F13 12	REV 04	750-024564	DW5794	SIB-TXP-F13
SIB F2S 0/0	REV 05	710-022603	DW7897	
SIB F2S 0/2	REV 05	710-022603	DW7833	
SIB F2S 0/4	REV 05	710-022603	DW7875	
SIB F2S 0/6	REV 05	710-022603	DW7860	
SIB F2S 1/0	REV 04	710-022603	DW4820	
SIB F2S 1/2	REV 05	710-022603	DW7849	
SIB F2S 1/4	REV 05	710-022603	DW7927	SIB-TXP-F2S
SIB F2S 1/6	REV 05	710-022603	DW7866	
SIB F2S 2/0	REV 05	710-022603	DW7880	
SIB F2S 2/2	REV 05	710-022603	DW7895	
SIB F2S 2/4	REV 05	710-022603	DW7907	
SIB F2S 2/6	REV 05	710-022603	DW7785	
SIB F2S 3/0	REV 05	710-022603	DW7782	
SIB F2S 3/2	REV 05	710-022603	DW7793	
SIB F2S 3/4	REV 05	710-022603	DW7779	
SIB F2S 3/6	REV 05	710-022603	DW7930	
SIB F2S 4/0	REV 05	710-022603	DW7867	
SIB F2S 4/2	REV 05	710-022603	DW7917	
SIB F2S 4/4	REV 05	710-022603	DW7929	
SIB F2S 4/6	REV 05	710-022603	DW7870	
Fan Tray 0	REV 06	760-024497	DV7831	FANTRAY-TXP-F
Fan Tray 1	REV 06	760-024497	DV9614	FANTRAY-TXP-F
Fan Tray 2	REV 06	760-024502	DV9618	FANTRAY-TXP-R
Fan Tray 3	REV 06	760-024502	DV9616	FANTRAY-TXP-R
Fan Tray 4	REV 06	760-024502	DV7807	FANTRAY-TXP-R
Fan Tray 5	REV 06	760-024502	DV7828	FANTRAY-TXP-R

lcc0-re0:

-----  
Hardware inventory:

Item	Version	Part number	Serial number	FRU model number
Midplane	REV 03	710-017247	RC3765	CHAS-BP-T1600-S
FPM Display	REV 01	710-021387	DN5441	CRAFT-T1600-S
CIP	REV 06	710-002895	DP6021	CIP-L-T640-S
PEM 0	Rev 07	740-017906	UA26384	PWR-T1600-3-80-DC-S
PEM 1	Rev 07	740-017906	UA26296	PWR-T1600-3-80-DC-S
SCG 0	REV 15	710-003423	DR0875	SCG-T-S
CB 0	REV 06	710-022597	DW8534	CB-LCC



CB 1	REV 06	710-022597	DW8527	CB-LCC
FPC 4	REV 12	710-013037	DJ8717	T1600-FPC4-ES
PIC 0	REV 11	750-017405	DP8795	PD-4XGE-XFP
PIC 1	REV 11	750-017405	DP8794	PD-4XGE-XFP
FPC 6	REV 14	710-013037	DS5335	T1600-FPC4-ES
PIC 0	REV 13	750-017405	DS7634	PD-4XGE-XFP
PIC 1	REV 13	750-017405	DS7637	PD-4XGE-XFP
FPC 7	REV 07	710-013035	DM0990	T1600-FPC3-ES
PIC 0	REV 16	750-007141	JJ8067	PC-10GE-SFP
PIC 1	REV 08	750-015749	WE9598	PC-10C192-SON-XFP
PIC 2	REV 10	750-009450	HX6466	PC-10C192-SON-SR2
SIB 0	REV 08	710-022594	DW8033	SIB-TXP-T1600-S
SIB 1	REV 08	710-022594	DW8044	SIB-TXP-T1600-S
SIB 2	REV 08	710-022594	DW8020	SIB-TXP-T1600-S
SIB 3	REV 08	710-022594	DW8063	SIB-TXP-T1600-S
SIB 4	REV 08	710-022594	DW8064	SIB-TXP-T1600-S
Fan Tray 0				FANTRAY-T-S
Fan Tray 1				FANTRAY-T-S
Fan Tray 2				FANTRAY-TXP-R-S

lcc1-re0:

-----  
Hardware inventory:

Item	Version	Part number	Serial number	FRU model number
Midplane	REV 04	710-017247	RC5361	CHAS-BP-T1600-S
FPM Display	REV 01	710-021387	DS6430	CRAFT-T1600-S
CIP	REV 06	710-002895	DS4239	CIP-L-T640-S
PEM 0	Rev 08	740-017906	UD26649	PWR-T1600-3-80-DC-S
SCG 0	REV 15	710-003423	DP5820	SCG-T-S
CB 0	REV 06	710-022597	DW8523	CB-LCC
CB 1	REV 06	710-022597	DW8528	CB-LCC
FPC 4	REV 12	710-013037	DP8509	T1600-FPC4-ES
PIC 0	REV 11	750-017405	DP8808	PD-4XGE-XFP
PIC 1	REV 11	750-017405	DP7263	PD-4XGE-XFP
FPC 6	REV 14	710-013037	DS9961	T1600-FPC4-ES
PIC 0	REV 13	750-017405	DS5532	PD-4XGE-XFP
PIC 1	REV 13	750-017405	DS7639	PD-4XGE-XFP
FPC 7	REV 03	710-013035	DF5564	T1600-FPC3-ES
PIC 0	REV 16	750-007141	JJ8063	PC-10GE-SFP
SIB 0	REV 08	710-022594	DW8035	SIB-TXP-T1600-S
SIB 1	REV 10	710-022594	DX7672	SIB-TXP-T1600-S
SIB 2	REV 08	710-022594	DW8060	SIB-TXP-T1600-S
SIB 3	REV 08	710-022594	DW8072	SIB-TXP-T1600-S
SIB 4	REV 08	710-022594	DW8043	SIB-TXP-T1600-S
Fan Tray 0				FANTRAY-T-S
Fan Tray 1				FANTRAY-T-S
Fan Tray 2				FANTRAY-TXP-R-S

lcc2-re0:

-----  
Hardware inventory:

Item	Version	Part number	Serial number	FRU model number
Midplane	REV 03	710-017247	RC3956	CHAS-BP-T1600-S
FPM Display	REV 01	710-021387	DN7030	CRAFT-T1600-S
CIP	REV 06	710-002895	DM3962	CIP-L-T640-S
PEM 0	Rev 08	740-017906	UD26519	PWR-T1600-3-80-DC-S
PEM 1	Rev 07	740-017906	UC26601	PWR-T1600-3-80-DC-S
SCG 0	REV 15	710-003423	DP0277	SCG-T-S
CB 0	REV 06	710-022597	DW8524	CB-LCC
CB 1	REV 06	710-022597	DW8536	CB-LCC
FPC 4	REV 12	710-013037	DR1194	T1600-FPC4-ES



PIC 0	REV 11	750-017405	DP8811	PD-4XGE-XFP
PIC 1	REV 11	750-017405	DP8823	PD-4XGE-XFP
FPC 5	REV 12	710-013037	DR1184	T1600-FPC4-ES
PIC 1	REV 11	750-017405	DP4744	PD-4XGE-XFP
FPC 6	REV 12	710-013037	DN8622	T1600-FPC4-ES
PIC 0	REV 14	750-012518	JY9924	PD-40C192-SON-XFP
PIC 1	REV 11	750-017405	DP8776	PD-4XGE-XFP
FPC 7	REV 04	710-013560	JR3968	T640-FPC3-E2
PIC 0	REV 16	750-007141	NC9330	PC-10GE-SFP
SIB 0	REV 07	710-022594	DW4217	SIB-TXP-T1600-S
SIB 1	REV 07	710-022594	DW4213	SIB-TXP-T1600-S
SIB 2	REV 07	710-022594	DW4189	SIB-TXP-T1600-S
SIB 3	REV 07	710-022594	DW4173	SIB-TXP-T1600-S
SIB 4	REV 07	710-022594	DW4201	SIB-TXP-T1600-S
Fan Tray 0				FANTRAY-T-S
Fan Tray 1				FANTRAY-T-S
Fan Tray 2				FANTRAY-TXP-R-S

```
lcc3-re0:
```

```
-----
Hardware inventory:
```

Item	Version	Part number	Serial number	FRU model number
Midplane	REV 04	710-017247	RC5319	CHAS-BP-T1600-S
FPM Display	REV 01	710-021387	DS6402	CRAFT-T1600-S
CIP	REV 06	710-002895	DR9973	CIP-L-T640-S
PEM 0	Rev 07	740-017906	UC26496	PWR-T1600-3-80-DC-S
PEM 1	Rev 07	740-017906	UC26599	PWR-T1600-3-80-DC-S
SCG 0	REV 15	710-003423	DP5831	SCG-T-S
CB 0	REV 06	710-022597	DW8533	CB-LCC
CB 1	REV 06	710-022597	DW8538	CB-LCC
FPC 0	REV 14	710-013037	DS5345	T1600-FPC4-ES
PIC 0	REV 13	750-017405	DS7641	PD-4XGE-XFP
PIC 1	REV 13	750-017405	DS5479	PD-4XGE-XFP
FPC 1	REV 14	710-013037	DS7338	T1600-FPC4-ES
PIC 0	REV 13	750-017405	DS7631	PD-4XGE-XFP
PIC 1	REV 13	750-017405	DS7632	PD-4XGE-XFP
FPC 2	REV 14	710-013037	DS9962	T1600-FPC4-ES
PIC 0	REV 13	750-017405	DS7581	PD-4XGE-XFP
PIC 1	REV 13	750-017405	DS7627	PD-4XGE-XFP
FPC 4	REV 10	710-010845	JZ6573	T640-FPC4-ES
PIC 0	REV 14	750-012518	JT5124	PD-40C192-SON-XFP
FPC 5	REV 14	710-013037	DT0016	T1600-FPC4-ES
PIC 0	REV 14	750-012518	JY9918	PD-40C192-SON-XFP
FPC 7	REV 07	710-013035	DM0967	T1600-FPC3-ES
PIC 0	REV 16	750-007141	JJ8059	PC-10GE-SFP
PIC 1	REV 13	750-004695	DM5712	PC-TUNNEL
SIB 0	REV 07	710-022594	DW4174	SIB-TXP-T1600-S
SIB 1	REV 07	710-022594	DW4207	SIB-TXP-T1600-S
SIB 2	REV 06	710-022594	DT8231	SIB-TXP-T1600-S
SIB 3	REV 07	710-022594	DW4175	SIB-TXP-T1600-S
SIB 4	REV 07	710-022594	DW4209	SIB-TXP-T1600-S
Fan Tray 0				FANTRAY-T-S
Fan Tray 1				FANTRAY-T-S
Fan Tray 2				FANTRAY-TXP-R-S

```
show chassis hardware
(16-Port 10-Gigabit
Ethernet MPC with
```

```
user@host> show chassis hardware
```

```
Hardware inventory:
```

Item	Version	Part number	Serial number	Description
Chassis			JN112D865AFA	MX960



## SFP+ Optics [MX Series Routers])

Midplane	REV 03	710-013698	TS3339	MX960 Backplane
FPM Board	REV 03	710-014974	WW6267	Front Panel Display
PDM	Rev 03	740-013110	QCS12485026	Power Distribution
Module PEM 0	Rev 04	740-013682	QCS12434086	PS 1.7kW; 200-240VAC
in PEM 1	Rev 04	740-013682	QCS1243408Z	PS 1.7kW; 200-240VAC
in PEM 2	Rev 04	740-013682	QCS1243407X	PS 1.7kW; 200-240VAC
in Routing Engine 0	REV 07	740-015113	9009009677	RE-S-1300
Routing Engine 1	REV 07	740-015113	9009011510	RE-S-1300
CB 0	REV 03	710-021523	XF0394	MX SCB
CB 1	REV 03	710-021523	XF0550	MX SCB
CB 2	REV 03	710-021523	XD7455	MX SCB
FPC 4	REV 02	750-028467	JR6127	MPC M 16x 10GE
CPU	REV 02	711-029089	JX0129	AS PMB
PIC 0		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
PIC 1		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
PIC 2		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
PIC 3		BUILTIN	BUILTIN	4x 10GE(LAN) SFP+
Fan Tray 0	REV 05	740-014971	TP9990	Fan Tray
Fan Tray 1	REV 05	740-014971	VS1709	Fan Tray

## show chassis hardware (MPC3E [MX Series Routers])

user@host&gt; show chassis hardware

Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			JN1101AFEAFB	MX480
Midplane	REV 05	710-017414	TR4444	MX480 Midplane
FPM Board	REV 02	710-017254	KG6056	Front Panel Display
PEM 0	Rev 03	740-017330	QCS082090FC	PS 1.2-1.7kW; 100-240V
PEM 1	Rev 03	740-017330	QCS082090FD	PS 1.2-1.7kW; 100-240V
Routing Engine 0	REV 07	740-013063	9009004124	RE-S-2000
Routing Engine 1	REV 07	740-013063	9009005569	RE-S-2000
CB 0	REV 07	710-021523	XZ3587	MX SCB
CB 1	REV 03	710-021523	KH8306	MX SCB
FPC 1	REV 04.1.07	750-033205	P1240	MPCE Type 3D
CPU	REV 01	711-035209	YL0504	HMPD PMB 2G
MIC 1	REV 10	750-033199	YX4495	1X100GE CFP
PIC 2		BUILTIN	BUILTIN	1X100GE CFP
Xcvr 0	REV 01	740-032210	C22CQNE	CFP-100G-LR4
FPC 2	REV 26	750-016670	KH0045	DPCE 40x 1GE R EQ
CPU	REV 07	710-013713	KF5448	DPC PMB
PIC 0		BUILTIN	BUILTIN	10x 1GE(LAN) EQ
Xcvr 0	REV 01	740-011613	PF21JHU	SFP-SX
PIC 1		BUILTIN	BUILTIN	10x 1GE(LAN) EQ
Xcvr 9	REV 01	740-011613	AM0813S8ZL6	SFP-SX
PIC 2		BUILTIN	BUILTIN	10x 1GE(LAN) EQ
Xcvr 0	REV 02	740-011613	PGL2KYF	SFP-SX
Xcvr 2	REV 01	740-011613	AM0806S8N4P	SFP-SX
PIC 3		BUILTIN	BUILTIN	10x 1GE(LAN) EQ
Xcvr 5	REV 01	740-011613	AM0815S967N	SFP-SX
Xcvr 7	REV 01	740-011613	AM0806S8N1X	SFP-SX
Xcvr 8	REV 01	740-011613	AM0815S967J	SFP-SX
Xcvr 9	REV 01	740-011613	AM0815S967M	SFP-SX
FPC 3	REV 12.2.09	750-033205	YR9443	MPCE Type 3D
CPU	REV 03	711-035209	YL6931	HMPD PMB 2G



MIC 0	REV 05	750-033199	YR3269	1X100GE CFP
PIC 0		BUILTIN	BUILTIN	1X100GE CFP
Xcvr 0	REV 01	740-032210	ULH0KG3	CFP-100G-LR4
MIC 1	REV 02	750-033199	YG3245	1X100GE CFP
PIC 2		BUILTIN	BUILTIN	1X100GE CFP
Xcvr 0	REV 01	740-032210	ULH0KGF	CFP-100G-LR4
FPC 4	REV 12.3.09	750-033205	YR9437	MPCE Type 3D
CPU	REV 03	711-035209	YT5857	HMPC PMB 2G
MIC 0	REV 05	750-033199	YR3295	1X100GE CFP
PIC 0		BUILTIN	BUILTIN	1X100GE CFP
Xcvr 0		NON-JNPR	X12000187	CFP-100G-SR10
MIC 1	REV 10	750-033199	YX4518	1X100GE CFP
PIC 2		BUILTIN	BUILTIN	1X100GE CFP
Xcvr 0	REV 01	740-035329	X12J00008	CFP-100G-SR10
FPC 5	REV 06	750-024884	JW9769	MPC Type 2 3D EQ
CPU	REV 02	711-028401	JR6158	MPC PMB 2G Proto
MIC 0	REV 05	750-028387	JR6197	3D 4x 10GE XFP
PIC 0		BUILTIN	BUILTIN	2x 10GE XFP
Xcvr 0	REV 01	740-014289	T07M71112	XFP-10G-SR
Xcvr 1	REV 02	740-014289	T08L85610	XFP-10G-SR
PIC 1		BUILTIN	BUILTIN	2x 10GE XFP
MIC 1	REV 22	750-028392	YM0053	3D 20x 1GE(LAN) SFP
PIC 2		BUILTIN	BUILTIN	10x 1GE(LAN) SFP
Xcvr 0	REV 01	740-011613	AM0703S005B	SFP-SX
Xcvr 1	REV 01	740-011613	E07L01352	SFP-SX
PIC 3		BUILTIN	BUILTIN	10x 1GE(LAN) SFP
Xcvr 5	REV 01	740-013111	6500217	SFP-T
Xcvr 9	REV 02	740-013111	8499527	SFP-T
Fan Tray				Left Fan Tray

The PIC number for MIC 1 always starts from 2 (even if the first MIC is a 1X100GE CFP or a legacy MIC).

#### show chassis hardware (QFX3500 Switches)

```
user@switch> show chassis hardware
```

Hardware inventory:				
Item	Version	Part number	Serial number	Description
Chassis				QFX3500
Routing Engine 0		BUILTIN	BUILTIN	QFX Routing Engine
FPC 0	REV 04	750-044071	BBAR3902	QFX3500-48S4Q-AFI
CPU		BUILTIN	BUILTIN	FPC CPU
PIC 0		BUILTIN	BUILTIN	48x 10G-SFP+
PIC 1		BUILTIN	BUILTIN	15x 10G-SFP+
MGMT BRD	REV 02	750-044063	BBAR0398	QFX3500-MGMT-SFP-AF0
Xcvr 0	REV 01	740-011614	AC0946S0BD1	SFP-LX10
Xcvr 1	REV 02	740-013111	A281922	SFP-T
Power Supply 0	Rev 04	740-032091	UI00677	JPSU-650W-AC-AFI
Power Supply 1	REV 00	740-041741	VJ00162	JPSU-650W-AC-AF0
Fan Tray 0				QFX Fan Tray, Back to
Front Airflow				
Fan Tray 1				QFX Fan Tray, Back to
Front Airflow				
Fan Tray 2				QFX Fan Tray, Back to
Front Airflow				

#### show chassis hardware detail (QFX3500 Switches)

```
user@switch> show chassis hardware detail
```

Hardware inventory:				
Item	Version	Part number	Serial number	Description
Chassis			JN000TEST5	QFX3500
Routing Engine 0		BUILTIN	BUILTIN	QFX Routing Engine



FPC 0	REV 05	750-036931	EE0823	QFX3500-48S4Q-AFI
CPU		BUILTIN	BUILTIN	FPC CPU
PIC 0		BUILTIN	BUILTIN	48x 10G-SFP+
Xcvr 0	REV 01	740-030589	S99E270079	SFP+-10G-LPBK
Xcvr 1	REV 01	740-030589	S9AK450099	SFP+-10G-LPBK
Xcvr 2	REV 01	740-030589	S99E270078	SFP+-10G-LPBK
Xcvr 3	REV 01	740-030589	S9AK450098	SFP+-10G-LPBK
Xcvr 4	REV 01	740-030589	S99E270075	SFP+-10G-LPBK
Xcvr 5	REV 01	740-030589	S9AK450093	SFP+-10G-LPBK
Xcvr 6	REV 01	740-030589	S9AK450097	SFP+-10G-LPBK
Xcvr 7	REV 01	740-030589	S9AK450095	SFP+-10G-LPBK
Xcvr 8	REV 01	740-030589	S99E270072	SFP+-10G-LPBK
Xcvr 9	REV 01	740-030589	S99E270073	SFP+-10G-LPBK
Xcvr 10	REV 01	740-030589	S99E270080	SFP+-10G-LPBK
Xcvr 11	REV 01	740-030589	S9AK450169	SFP+-10G-LPBK
Xcvr 12	REV 01	740-030589	S99E270076	SFP+-10G-LPBK
Xcvr 13	REV 01	740-030589	S9AK450167	SFP+-10G-LPBK
Xcvr 14	REV 01	740-030589	S9AK450170	SFP+-10G-LPBK
Xcvr 15	REV 01	740-030589	S9AK450166	SFP+-10G-LPBK
Xcvr 16	REV 01	740-030589	S9AK450092	SFP+-10G-LPBK
Xcvr 17	REV 01	740-030589	S9AK450163	SFP+-10G-LPBK
Xcvr 18	REV 01	740-030589	S9AK450094	SFP+-10G-LPBK
Xcvr 19	REV 01	740-030589	S9AK450100	SFP+-10G-LPBK
Xcvr 20	REV 01	740-030589	S9AK450168	SFP+-10G-LPBK
Xcvr 21	REV 01	740-030589	S9AK450165	SFP+-10G-LPBK
Xcvr 22	REV 01	740-030589	S9AK450073	SFP+-10G-LPBK
Xcvr 23	REV 01	740-030589	S9AK450164	SFP+-10G-LPBK
Xcvr 24	REV 01	740-030589	S9AK450074	SFP+-10G-LPBK
Xcvr 25	REV 01	740-030589	SA62270195	SFP+-10G-LPBK
Xcvr 26	REV 01	740-030589	S9AK450078	SFP+-10G-LPBK
Xcvr 27	REV 01	740-030589	S9AK450024	SFP+-10G-LPBK
Xcvr 28	REV 01	740-030589	S9AK450027	SFP+-10G-LPBK
Xcvr 29	REV 01	740-030589	S9AK450080	SFP+-10G-LPBK
Xcvr 30	REV 01	740-030589	S9AK450030	SFP+-10G-LPBK
Xcvr 31	REV 01	740-030589	S9AK450025	SFP+-10G-LPBK
Xcvr 32	REV 01	740-030589	S9AK450023	SFP+-10G-LPBK
Xcvr 33	REV 01	740-030589	S9AK450075	SFP+-10G-LPBK
Xcvr 34	REV 01	740-030589	S9AK450161	SFP+-10G-LPBK
Xcvr 35	REV 01	740-030589	S9AK450071	SFP+-10G-LPBK
Xcvr 36	REV 01	740-030589	S9AK450072	SFP+-10G-LPBK
Xcvr 37	REV 01	740-030589	S9AK450022	SFP+-10G-LPBK
Xcvr 38	REV 01	740-030589	S9AK450021	SFP+-10G-LPBK
Xcvr 39	REV 01	740-030589	S9AK450175	SFP+-10G-LPBK
Xcvr 40	REV 01	740-030589	S9AK450162	SFP+-10G-LPBK
Xcvr 41	REV 01	740-030589	S99E270074	SFP+-10G-LPBK
Xcvr 42	REV 01	740-030589	S9AK450174	SFP+-10G-LPBK
Xcvr 43	REV 01	740-030589	S9AK450077	SFP+-10G-LPBK
Xcvr 44	REV 01	740-030589	S9AK450076	SFP+-10G-LPBK
Xcvr 45	REV 01	740-030589	S9AK450026	SFP+-10G-LPBK
Xcvr 46	REV 01	740-030589	S9AK450079	SFP+-10G-LPBK
Xcvr 47	REV 01	740-030589	S9AK450029	SFP+-10G-LPBK
PIC 1		BUILTIN	BUILTIN	15x 10G-SFP+
Xcvr 1	REV 01	740-032986	QA170087	QSFP+-40G-SR4
Xcvr 4	REV 01	740-032986	QA360442	QSFP+-40G-SR4
Xcvr 8	REV 01	740-032986	QA170091	QSFP+-40G-SR4
Xcvr 12	REV 01	740-032986	QA170042	QSFP+-40G-SR4
MGMT BRD	REV 08	750-036946	EE0731	QFX3500-MB
Power Supply 0	Rev 04	740-032091	UI00690	QFX PS 650W AC
Power Supply 1	Rev 04	740-032091	UI00679	QFX PS 650W AC



```

Fan Tray 0
Fan Tray 1
QFX Fan Tray
QFX Fan Tray

```

#### show chassis hardware models (QFX3500 Switches)

```

user@switch> show chassis hardware models
Hardware inventory:
Item                Version  Part number  Serial number  FRU model number
Routing Engine 0
FPC 0               REV 02    711-032234   EC4074
Power Supply 0     PSMI 2C   11-d65800   --

```

#### show chassis hardware clei-models (QFX3500 Switches)

```

user@switch> show chassis hardware clei-models
Hardware inventory:
Item                Version  Part number  CLEI code      FRU model number
Routing Engine 0
FPC 0               REV 02    711-032234
Power Supply 0     PSMI 2C   11-d65800

```

#### show chassis hardware interconnect-device (QFabric Systems)

```

user@switch> show chassis hardware interconnect-device interconnect1
Hardware inventory:
Item                Version  Part number  Serial number  Description
Chassis             REV 07
Midplane            REV 07    750-021261   BH0208188289   QFX_olive
CB 0                REV 07    750-021261   BH0208188289   QFXIC08-CB4S

```

#### show chassis hardware node-device (QFabric Systems)

```

user@switch> show chassis hardware node-device node1
Routing Engine 0    BUILTIN    BUILTIN    QFX Routing Engine
node1              REV 05    711-032234   ED3694      QFX3500-48S4Q-AFI

CPU
PIC 0
Xcvr 8             REV 01    740-030658   AD0946A028B   FPC CPU
...                48x 10G-SFP+
...                SFP+-10G-USR

```

#### show chassis hardware (PTX5000 Packet Transport Switch)

```

user@switch> show chassis hardware
Hardware inventory:
Item                Version  Part number  Serial number  Description
Chassis             JN11D1FD7AJA
Midplane            REV 03    711-031896   ABAC5589      PTX5000
FPM                 REV 08    760-030647   EG1679        Midplane-8S
PDU 0              Rev 05    740-032019   ZE00006       Front Panel Display
PSM 0              Rev 05    740-032022   ZJ00018       DC Power Dist Unit
PSM 1              Rev 04    740-032022   ZC00052       DC 12V Power Supply
PSM 2              Rev 04    740-032022   ZD00051       DC 12V Power Supply
PSM 3              Rev 05    740-032022   ZJ00060       DC 12V Power Supply
CCG 0              REV 04    750-030653   EG3703        Clock Generator
CCG 1              REV 04    750-030653   EG3698        Clock Generator
Routing Engine 0    REV 05    740-026942   P737A-002231  RE-DUO-2600
Routing Engine 1    REV 06    740-026942   P737A-002438  RE-DUO-2600
CB 0               REV 08    750-030625   EG5519        Control Board
CB 1               REV 08    750-030625   EG5516        Control Board
FPC 0              REV 18    750-036844   EJ3080        FPC
CPU                REV 12    711-030686   EJ3260        SNG PMB
FPC 2              REV 13    750-036844   EG5065        FPC
CPU                REV 09    711-030686   EG4082        SNG PMB
PIC 0              REV 14    750-031913   EG5127        24x 10GE(LAN) SFP+
Xcvr 0             REV 01    740-031980   143363A00240  SFP+-10G-SR

```



Xcvr 1	REV 01	740-031981	UK90PZ1	SFP+-10G-LR
Xcvr 2	REV 01	740-031980	AD1141A04XH	SFP+-10G-SR
Xcvr 3	REV 01	740-031981	UK90Q46	SFP+-10G-LR
Xcvr 4	REV 01	740-031980	AD1141A04X4	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	B11H02560	SFP+-10G-SR
Xcvr 7	REV 01	740-031980	B11C01589	SFP+-10G-SR
Xcvr 8	REV 01	740-031980	AD1141A04XF	SFP+-10G-SR
Xcvr 10	REV 01	740-031980	123363A01094	SFP+-10G-SR
Xcvr 11	REV 01	740-031980	AK80LKF	SFP+-10G-SR
Xcvr 12	REV 01	740-031980	183363A01528	SFP+-10G-SR
Xcvr 14	REV 01	740-031980	193363A01079	SFP+-10G-SR
Xcvr 15	REV 01	740-031980	AK80MC8	SFP+-10G-SR
Xcvr 16	REV 01	740-031980	AJCOBHC	SFP+-10G-SR
Xcvr 19	REV 01	740-021309	J08D26856	SFP+-10G-LR
Xcvr 21	REV 01	740-031980	AK80KCT	SFP+-10G-SR
Xcvr 22	REV 01	740-031981	UK90PZL	SFP+-10G-LR
Xcvr 23	REV 01	740-031980	AK80N1V	SFP+-10G-SR
FPC 3	REV 13	750-036844	EG5074	FPC
CPU	REV 09	711-030686	EG4064	SNG PMB
PIC 1	REV 10	750-031903	EG0325	SNG Load
FPC 5	REV 06	750-036844	EH3198	FPC
CPU				
PIC 0	REV 14	750-031913	EG5134	24x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LBH	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11B03724	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80FMH	SFP+-10G-SR
Xcvr 5	REV 01	740-031980	B11J00818	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	193363A00743	SFP+-10G-SR
Xcvr 7	REV 01	740-031980	B11B06125	SFP+-10G-SR
Xcvr 10	REV 01	740-031980	B11H02529	SFP+-10G-SR
Xcvr 11	REV 01	740-031980	AK80LFB	SFP+-10G-SR
Xcvr 12	REV 01	740-031980	193363A01061	SFP+-10G-SR
Xcvr 15	REV 01	740-031980	B11J00687	SFP+-10G-SR
Xcvr 16	REV 01	740-031980	193363A00738	SFP+-10G-SR
Xcvr 18	REV 01	740-031980	AK80MQX	SFP+-10G-SR
Xcvr 19	REV 01	740-021309	J08C17257	SFP+-10G-LR
Xcvr 22	REV 01	740-031980	B11J00730	SFP+-10G-SR
Xcvr 23	REV 01	740-031980	AK80KEE	SFP+-10G-SR
PIC 1	REV 08	750-036710	EG3105	2x 40GE CFP
Xcvr 0	REV 01	740-034554	B260HLT	CFP-40G-LR4
Xcvr 1	REV 01	740-034554	B11C02847	CFP-40G-LR4
FPC 6	REV 18	750-036844	EJ4391	FPC
CPU	REV 12	711-030686	EJ3257	SNG PMB
FPC 7	REV 18	750-036844	EJ4382	FPC
CPU	REV 12	711-030686	EJ3238	SNG PMB
SPMB 0	REV 10	711-030686	EG5418	SNG PMB
SPMB 1	REV 09	711-030686	EG5373	SNG PMB
SIB 0	REV 07	750-030631	EG4858	SIB-I-8S
SIB 1	REV 07	750-030631	EG4872	SIB-I-8S
SIB 2	REV 07	750-030631	EG4866	SIB-I-8S
SIB 3	REV 07	750-030631	EG6011	SIB-I-8S
SIB 4	REV 07	750-030631	EG4907	SIB-I-8S
SIB 5	REV 07	750-030631	EG4879	SIB-I-8S
SIB 6	REV 07	750-030631	EG4864	SIB-I-8S
SIB 7	REV 07	750-030631	EG4899	SIB-I-8S
SIB 8	REV 07	750-030631	EG4880	SIB-I-8S
Fan Tray 0	REV 04	760-032784	EG1496	Vertical Fan Tray
Fan Tray 1	REV 04	760-030642	EG1335	Horizontal Fan Tray
Fan Tray 2	REV 02	760-030642	ED4952	Horizontal Fan Tray

```
user@switch> show chassis hardware clei-models
```



show chassis hardware  
clei-models (PTX5000  
Packet Transport  
Switch)

Hardware inventory:

Item	Version	Part number	CLEI code	FRU model number
FPM	REV 08	760-030647	PROTOXCLEI	CRAFT-PTX5000-S
PDU 0	Rev 05	740-032019	IPUPAHLKAA	PWR-SAN-PDU-DC
PSM 0	Rev 05	740-032022	IPUPAHNKAA	PSM-PTX-DC-120-S
PSM 1	Rev 04	740-032022	032022XXXX	PWR-SAN-12-DC
PSM 2	Rev 04	740-032022	032022XXXX	PWR-SAN-12-DC
PSM 3	Rev 05	740-032022	IPUPAHNKAA	PSM-PTX-DC-120-S
CCG 0	REV 04	750-030653	PROTOXCLEI	CCG-PTX-S
CCG 1	REV 04	750-030653	PROTOXCLEI	CCG-PTX-S
Routing Engine 0	REV 05	740-026942		RE-DUO-C2600-16G-S
Routing Engine 1	REV 06	740-026942		RE-DUO-C2600-16G-S
CB 0	REV 08	750-030625	PROTOXCLEI	CB-PTX-S
CB 1	REV 08	750-030625	PROTOXCLEI	CB-PTX-S
FPC 0	REV 18	750-036844	PROTOXCLEI	FPC-PTX-P1-A
FPC 2	REV 13	750-036844	PROTOXCLEI	FPC-PTX-P1-A
PIC 0	REV 14	750-031913	PROTOXCLEI	P1-PTX-24-10GE-SFPP
FPC 3	REV 13	750-036844	PROTOXCLEI	FPC-PTX-P1-A
FPC 5				
PIC 0	REV 14	750-031913	PROTOXCLEI	P1-PTX-24-10GE-SFPP
FPC 6	REV 18	750-036844	PROTOXCLEI	FPC-PTX-P1-A
FPC 7	REV 18	750-036844	PROTOXCLEI	FPC-PTX-P1-A
SIB 0	REV 07	750-030631	PROTOXCLEI	SIB-I-PTX5008
SIB 1	REV 07	750-030631	PROTOXCLEI	SIB-I-PTX5008
SIB 2	REV 07	750-030631	PROTOXCLEI	SIB-I-PTX5008
SIB 3	REV 07	750-030631	PROTOXCLEI	SIB-I-PTX5008
SIB 4	REV 07	750-030631	PROTOXCLEI	SIB-I-PTX5008
SIB 5	REV 07	750-030631	PROTOXCLEI	SIB-I-PTX5008
SIB 6	REV 07	750-030631	PROTOXCLEI	SIB-I-PTX5008
SIB 7	REV 07	750-030631	PROTOXCLEI	SIB-I-PTX5008
SIB 8	REV 07	750-030631	PROTOXCLEI	SIB-I-PTX5008
Fan Tray 1	REV 04	760-030642	PROTOXCLEI	FAN-PTX-H-S

show chassis hardware  
detail (PTX5000)

user@switch> show chassis hardware detail

Hardware inventory:

Item	Version	Part number	Serial number	Description
------	---------	-------------	---------------	-------------



Packet Transport  
Switch)

Chassis			JN11D1FD7AJA	PTX5000
Midplane			ABAC5589	Midplane-8S
FPM	REV 03	711-031896	EG1679	Front Panel Display
PDU 0	Rev 05	740-032019	ZE00006	DC Power Dist Unit
PSM 0	Rev 05	740-032022	ZJ00018	DC 12V Power Supply
PSM 1	Rev 04	740-032022	ZC00052	DC 12V Power Supply
PSM 2	Rev 04	740-032022	ZD00051	DC 12V Power Supply
PSM 3	Rev 05	740-032022	ZJ00060	DC 12V Power Supply
CCG 0	REV 04	750-030653	EG3703	Clock Generator
CCG 1	REV 04	750-030653	EG3698	Clock Generator
Routing Engine 0	REV 05	740-026942	P737A-002231	RE-DUO-2600
ad0	3823 MB	SMART CF	201006190039C02DC02D	Compact Flash
ad1	62720 MB	SMART Lite SATA Drive	2011042300CF4C6B4C6B	Disk 1
Routing Engine 1	REV 06	740-026942	P737A-002438	RE-DUO-2600
ad0	3823 MB	SMART CF	20100619053455F055F0	Compact Flash
ad1	62720 MB	SMART Lite SATA Drive	20110423000AE8E7E8E7	Disk 1
CB 0	REV 08	750-030625	EG5519	Control Board
CB 1	REV 08	750-030625	EG5516	Control Board
FPC 0	REV 18	750-036844	EJ3080	FPC
CPU	REV 12	711-030686	EJ3260	SNG PMB
FPC 2	REV 13	750-036844	EG5065	FPC
CPU	REV 09	711-030686	EG4082	SNG PMB
PIC 0	REV 14	750-031913	EG5127	24x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	143363A00240	SFP+-10G-SR
Xcvr 1	REV 01	740-031981	UK90PZ1	SFP+-10G-LR
Xcvr 2	REV 01	740-031980	AD1141A04XH	SFP+-10G-SR
Xcvr 3	REV 01	740-031981	UK90Q46	SFP+-10G-LR
Xcvr 4	REV 01	740-031980	AD1141A04X4	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	B11H02560	SFP+-10G-SR
Xcvr 7	REV 01	740-031980	B11C01589	SFP+-10G-SR
Xcvr 8	REV 01	740-031980	AD1141A04XF	SFP+-10G-SR
Xcvr 10	REV 01	740-031980	123363A01094	SFP+-10G-SR
Xcvr 11	REV 01	740-031980	AK80LKF	SFP+-10G-SR
Xcvr 12	REV 01	740-031980	183363A01528	SFP+-10G-SR
Xcvr 14	REV 01	740-031980	193363A01079	SFP+-10G-SR
Xcvr 15	REV 01	740-031980	AK80MC8	SFP+-10G-SR
Xcvr 16	REV 01	740-031980	AJCOBHC	SFP+-10G-SR
Xcvr 19	REV 01	740-021309	J08D26856	SFP+-10G-LR
Xcvr 21	REV 01	740-031980	AK80KCT	SFP+-10G-SR
Xcvr 22	REV 01	740-031981	UK90PZL	SFP+-10G-LR
Xcvr 23	REV 01	740-031980	AK80N1V	SFP+-10G-SR
FPC 3	REV 13	750-036844	EG5074	FPC
CPU	REV 09	711-030686	EG4064	SNG PMB
PIC 1	REV 10	750-031903	EG0325	SNG Load
FPC 5	REV 06	750-036844	EH3198	FPC
CPU				
PIC 0	REV 14	750-031913	EG5134	24x 10GE(LAN) SFP+
Xcvr 0	REV 01	740-031980	AK80LBH	SFP+-10G-SR
Xcvr 1	REV 01	740-031980	B11B03724	SFP+-10G-SR
Xcvr 2	REV 01	740-031980	AK80FMH	SFP+-10G-SR
Xcvr 5	REV 01	740-031980	B11J00818	SFP+-10G-SR
Xcvr 6	REV 01	740-031980	193363A00743	SFP+-10G-SR
Xcvr 7	REV 01	740-031980	B11B06125	SFP+-10G-SR
Xcvr 10	REV 01	740-031980	B11H02529	SFP+-10G-SR
Xcvr 11	REV 01	740-031980	AK80LFB	SFP+-10G-SR
Xcvr 12	REV 01	740-031980	193363A01061	SFP+-10G-SR
Xcvr 15	REV 01	740-031980	B11J00687	SFP+-10G-SR
Xcvr 16	REV 01	740-031980	193363A00738	SFP+-10G-SR
Xcvr 18	REV 01	740-031980	AK80MQX	SFP+-10G-SR
Xcvr 19	REV 01	740-021309	J08C17257	SFP+-10G-LR
Xcvr 22	REV 01	740-031980	B11J00730	SFP+-10G-SR



Xcvr 23	REV 01	740-031980	AK80KEE	SFP+-10G-SR
PIC 1	REV 08	750-036710	EG3105	2x 40GE CFP
Xcvr 0	REV 01	740-034554	B260HLT	CFP-40G-LR4
Xcvr 1	REV 01	740-034554	B11C02847	CFP-40G-LR4
FPC 6	REV 18	750-036844	EJ4391	FPC
CPU	REV 12	711-030686	EJ3257	SNG PMB
FPC 7	REV 18	750-036844	EJ4382	FPC
CPU	REV 12	711-030686	EJ3238	SNG PMB
SPMB 0	REV 10	711-030686	EG5418	SNG PMB
SPMB 1	REV 09	711-030686	EG5373	SNG PMB
SIB 0	REV 07	750-030631	EG4858	SIB-I-8S
SIB 1	REV 07	750-030631	EG4872	SIB-I-8S
SIB 2	REV 07	750-030631	EG4866	SIB-I-8S
SIB 3	REV 07	750-030631	EG6011	SIB-I-8S
SIB 4	REV 07	750-030631	EG4907	SIB-I-8S
SIB 5	REV 07	750-030631	EG4879	SIB-I-8S
SIB 6	REV 07	750-030631	EG4864	SIB-I-8S
SIB 7	REV 07	750-030631	EG4899	SIB-I-8S
SIB 8	REV 07	750-030631	EG4880	SIB-I-8S
Fan Tray 0	REV 04	760-032784	EG1496	Vertical Fan Tray
Fan Tray 1	REV 04	760-030642	EG1335	Horizontal Fan Tray
Fan Tray 2	REV 02	760-030642	ED4952	Horizontal Fan Tray

#### show chassis hardware models (PTX5000 Packet Transport Switch)

user@switch> show chassis hardware models

Hardware inventory:

Item	Version	Part number	Serial number	FRU model number
FPM	REV 08	760-030647	EG1679	CRAFT-PTX5000-S
PDU 0	Rev 05	740-032019	ZE00006	PWR-SAN-PDU-DC
PSM 0	Rev 05	740-032022	ZJ00018	PSM-PTX-DC-120-S
PSM 1	Rev 04	740-032022	ZC00052	PWR-SAN-12-DC
PSM 2	Rev 04	740-032022	ZD00051	PWR-SAN-12-DC
PSM 3	Rev 05	740-032022	ZJ00060	PSM-PTX-DC-120-S
CCG 0	REV 04	750-030653	EG3703	CCG-PTX-S
CCG 1	REV 04	750-030653	EG3698	CCG-PTX-S
Routing Engine 0	REV 05	740-026942	P737A-002231	RE-DUO-C2600-16G-S
Routing Engine 1	REV 06	740-026942	P737A-002438	RE-DUO-C2600-16G-S
CB 0	REV 08	750-030625	EG5519	CB-PTX-S
CB 1	REV 08	750-030625	EG5516	CB-PTX-S
FPC 0	REV 18	750-036844	EJ3080	FPC-PTX-P1-A
FPC 2	REV 13	750-036844	EG5065	FPC-PTX-P1-A
PIC 0	REV 14	750-031913	EG5127	P1-PTX-24-10GE-SFPP
FPC 3	REV 13	750-036844	EG5074	FPC-PTX-P1-A
FPC 5				
PIC 0	REV 14	750-031913	EG5134	P1-PTX-24-10GE-SFPP
FPC 6	REV 18	750-036844	EJ4391	FPC-PTX-P1-A
FPC 7	REV 18	750-036844	EJ4382	FPC-PTX-P1-A
SIB 0	REV 07	750-030631	EG4858	SIB-I-PTX5008
SIB 1	REV 07	750-030631	EG4872	SIB-I-PTX5008
SIB 2	REV 07	750-030631	EG4866	SIB-I-PTX5008
SIB 3	REV 07	750-030631	EG6011	SIB-I-PTX5008
SIB 4	REV 07	750-030631	EG4907	SIB-I-PTX5008
SIB 5	REV 07	750-030631	EG4879	SIB-I-PTX5008
SIB 6	REV 07	750-030631	EG4864	SIB-I-PTX5008
SIB 7	REV 07	750-030631	EG4899	SIB-I-PTX5008
SIB 8	REV 07	750-030631	EG4880	SIB-I-PTX5008
Fan Tray 1	REV 04	760-030642	EG1335	FAN-PTX-H-S

#### show chassis hardware extensive (PTX5000)

user@switch> show chassis hardware extensive

Hardware inventory:

Item	Version	Part number	Serial number	Description
------	---------	-------------	---------------	-------------



Packet Transport  
Switch)

```

.....
PDU 0          Rev 04   740-032019   UE0003          DC Power Dist Unit
Jedec Code:    0x7fb0          EEPROM Version:    0x02
P/N:          740-032019      S/N:              S/N UE0003
Assembly ID:   0x043d          Assembly Version:  04.00
Date:          11-29-2010      Assembly Flags:    0x00
Version:       Rev 04          CLEI Code:         032022XXXX
ID: DC Power Dist Unit          FRU Model Number:  PWR-SAN-PDU-DC
Board Information Record:
  Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
I2C Hex Data:
  Address 0x00: 7f b0 02 ff 04 3d 04 00 52 65 76 20 30 34 00 00
  Address 0x10: 00 00 00 00 37 34 30 2d 30 33 32 30 31 39 00 00
  Address 0x20: 53 2f 4e 20 55 45 30 30 30 33 00 00 00 1d 0b 07
  Address 0x30: da ff ff ff ff ff ff ff ff ff ff ff ff ff ff
  Address 0x40: ff ff ff ff 01 30 33 32 30 32 32 58 58 58 58 50
  Address 0x50: 57 52 2d 53 41 4e 2d 50 44 55 2d 44 43 00 00 00
  Address 0x60: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
  Address 0x70: 00 00 00 a3 ff ff ff ff ff ff ff ff ff ff ff ff
PSM 0          Rev 04   740-032022   YG00065          DC 12V Power Supply
Module
Jedec Code:    0x7fb0          EEPROM Version:    0x02
P/N:          740-032022      S/N:              S/N YG00065
Assembly ID:   0x0440          Assembly Version:  04.00
Date:          07-30-2010      Assembly Flags:    0x00
Version:       Rev 04          CLEI Code:         032022XXXX
ID: DC 12V Power Supply Module  FRU Model Number:  PWR-SAN-12-DC
Board Information Record:
  Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
I2C Hex Data:
  Address 0x00: 7f b0 02 ff 04 40 04 00 52 65 76 20 30 34 00 00
  Address 0x10: 00 00 00 00 37 34 30 2d 30 33 32 30 32 32 00 00
  Address 0x20: 53 2f 4e 20 59 47 30 30 30 36 35 00 00 1e 07 07
  Address 0x30: da ff ff ff ff ff ff ff ff ff ff ff ff ff ff
  Address 0x40: ff ff ff ff 01 30 33 32 30 32 32 58 58 58 58 50
  Address 0x50: 57 52 2d 53 41 4e 2d 31 32 2d 44 43 20 20 20 20
  Address 0x60: 20 20 20 20 20 20 20 01 00 ff ff ff ff ff ff ff
  Address 0x70: ff ff ff 0c ff ff ff ff ff ff ff ff ff ff ff ff

```

show chassis hardware  
(MX Routers with  
Media Services Blade  
[MSB])

user@switch&gt; show chassis hardware

Hardware inventory:

Item	Version	Part number	Serial number	Description
Chassis			JN1100FB1AFB	MX480
Midplane	REV 05	710-017414	TR3310	MX480 Midplane
FPM Board	REV 02	710-017254	KG1872	Front Panel Display
PEM 2	Rev 02	740-017343	QCS0812A00N	DC Power Entry Module
PEM 3	Rev 02	740-017343	QCS0812A00U	DC Power Entry Module
Routing Engine 0	REV 07	740-015113	1000740938	RE-S-1300
CB 0	REV 03	710-021523	KF4630	MX SCB
FPC 1	REV 11	750-037207	ZW9726	AS-MCC
CPU	REV 04	711-038173	ZW4819	AS-MCC PMB
MIC 0	REV 06	750-037214	ZW3574	AS-MSC
PIC 0		BUILTIN	BUILTIN	AS-MSC
MIC 1	REV 00	750-037211		AS-MXC
PIC 2		BUILTIN	BUILTIN	AS-MXC

show chassis hardware  
extensive (MX Routers)

user@switch&gt; show chassis hardware extensive

```

FPC 1          REV 11   750-037207   ZW9726          AS-MCC
Jedec Code:    0x7fb0          EEPROM Version:    0x02

```



with Media Services  
Blade [MSB])

```

P/N:          750-037207          S/N:          S/N ZW9726
Assembly ID:  0x0b37             Assembly Version: 01.11
Date:         02-17-2012         Assembly Flags:  0x00
Version:      REV 11             CLEI Code:      PROTOXCLEI
ID: AS-MCC          FRU Model Number: 750-037207
Board Information Record:
Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
I2C Hex Data:
Address 0x00: 7f b0 02 ff 0b 37 01 0b 52 45 56 20 31 31 00 00
Address 0x10: 00 00 00 00 37 35 30 2d 30 33 37 32 30 37 00 00
Address 0x20: 53 2f 4e 20 5a 57 39 37 32 36 00 00 00 11 02 07
Address 0x30: dc ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x40: ff ff ff ff 01 50 52 4f 54 4f 58 43 4c 45 49 37
Address 0x50: 35 30 2d 30 33 37 32 30 37 00 00 00 00 00 00 00
Address 0x60: 00 00 00 00 00 00 31 31 00 ff ff ff ff ff ff ff
Address 0x70: ff ff ff 5e ff ff ff ff ff ff ff ff ff ff ff ff
CPU          REV 04      711-038173      ZW4819      AS-MCC-PMB
Jedec Code:  0x7fb0             EEPROM Version: 0x02
P/N:         711-038173         S/N:          S/N ZW4819
Assembly ID: 0x0b38             Assembly Version: 01.04
Date:        12-30-2011         Assembly Flags: 0x00
Version:     REV 04
ID: AS-MCC PMB
Board Information Record:
Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
I2C Hex Data:
Address 0x00: 7f b0 02 ff 0b 38 01 04 52 45 56 20 30 34 00 00
Address 0x10: 00 00 00 00 37 31 31 2d 30 33 38 31 37 33 00 00
Address 0x20: 53 2f 4e 20 5a 57 34 38 31 39 00 00 00 1e 0c 07
Address 0x30: db ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x40: ff ff ff ff 00 50 52 4f 54 4f 58 43 4c 45 49 37
Address 0x50: 31 31 2d 30 33 38 31 37 33 00 00 00 00 00 00 00
Address 0x60: 00 00 00 00 00 00 30 34 00 ff ff ff ff ff ff ff
Address 0x70: ff ff ff 60 00 00 00 00 00 00 00 00 00 00 00 00
MIC 0          REV 06      750-037214      ZW3574      AS-MSC
Jedec Code:  0x7fb0             EEPROM Version: 0x02
P/N:         750-037214         S/N:          S/N ZW3574
Assembly ID: 0x0a44             Assembly Version: 01.06
Date:        02-19-2012         Assembly Flags: 0x00
Version:     REV 06             CLEI Code:      PROTOXCLEI
ID: AS-MSC          FRU Model Number: 750-037214
Board Information Record:
Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
I2C Hex Data:
Address 0x00: 7f b0 02 ff 0a 44 01 06 52 45 56 20 30 36 00 00
Address 0x10: 00 00 00 00 37 35 30 2d 30 33 37 32 31 34 00 00
Address 0x20: 53 2f 4e 20 5a 57 33 35 37 34 00 00 00 13 02 07
Address 0x30: dc ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x40: ff ff ff ff 01 50 52 4f 54 4f 58 43 4c 45 49 37
Address 0x50: 35 30 2d 30 33 37 32 31 34 00 00 00 00 00 00 00
Address 0x60: 00 00 00 00 00 00 30 36 00 ff ff ff ff ff ff ff
Address 0x70: ff ff ff 60 c0 03 e5 f4 00 00 00 00 00 00 00 00
PIC 0          BUILTIN      BUILTIN      AS-MSC
MIC 1          REV 00      750-037211      AS-MXC
Jedec Code:  0x7fb0             EEPROM Version: 0x01
P/N:         750-037211
Assembly ID: 0x0a43             Assembly Version: 01.00
Date:        255-255-65535      Assembly Flags: 0x00
Version:     REV 00
ID: AS-MXC
Board Information Record:

```



```

Address 0x00: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
I2C Hex Data:
Address 0x00: 7f b0 01 ff 0a 43 01 00 52 45 56 20 30 30 00 00
Address 0x10: 00 00 00 00 37 35 30 2d 30 33 37 32 31 31 00 00
Address 0x20: 00 00 00 00 00 00 00 00 00 00 00 00 00 00 ff ff ff
Address 0x30: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x40: ff ff ff ff 00 ff ff ff ff ff ff ff ff ff ff ff
Address 0x50: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x60: ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff ff
Address 0x70: ff ff ff ff c0 02 e6 6c 7f b0 02 ff 0a 44 01 06
          PIC 2                BUILTIN          BUILTIN          AS-MXC

```



## show chassis lcd

show chassis lcd (EX Series)	<pre>show chassis lcd &lt;fpc-slot &lt;fpc-slot-number&gt;&gt; &lt;menu &lt;(all-members   local   member member-id)&gt;&gt;</pre>
show chassis lcd (QFX Series)	<pre>show chassis lcd &lt;fpc-slot &lt;fpc-slot-number&gt;&gt; &lt;interconnect-device name&gt; &lt;node-device name&gt;</pre>
Release Information	<p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>menu</b> option introduced in Junos OS Release 10.2 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p>
Description	<p>Display the information that appears on the LCD panel of EX3200, EX3300, EX4200, EX4500, EX6200, and EX8200 switches, XRE200 External Routing Engines, and the QFX Series. Display the status of the currently selected port parameter of the Status LED for each network port on the device.</p>
Options	<p><b>none</b>—Display the information that appears on the LCD panel (for any EX Series member switch in a Virtual Chassis or for XRE200 External Routing Engines, display the information for all Virtual Chassis members). Display the status of the currently selected port parameter of the Status LED for each network port.</p> <p><b>fpc-slot &lt;fpc-slot-number&gt;</b>—(Optional) Display the information as follows:</p> <ul style="list-style-type: none"> <li>(EX3200, EX3300, EX4200, and EX4500 switches, or the QFX Series) Display the information that appears on the LCD panel for either an FPC slot with no <b>fpc-slot-number</b> value specified or for the FPC slot specified by <b>fpc-slot 0</b>. <b>fpc-slot</b> refers to the switch itself and <b>0</b> is the only valid value for <b>fpc-slot-number</b>. Output for these options is the same as for the <b>none</b> option.</li> </ul> <p>Also display the status of the currently selected port parameter of the Status LED for each network port.</p> <ul style="list-style-type: none"> <li>(EX Series Virtual Chassis member switches or XRE200 External Routing Engines) If no <b>fpc-slot-number</b> value is specified, display the information that appears on the LCD panel for all members of the Virtual Chassis. Output for this option is the same as for the <b>none</b> option. If the <b>fpc-slot-number</b> value is specified (it equals the <b>member-id</b> value), display the information for the specified member.</li> </ul> <p>Also display the status of the currently selected port parameter of the Status LED for each network port.</p> <ul style="list-style-type: none"> <li>(EX6200 or EX8200 switches)—Display the information that appears on the LCD panel for the line card in the line-card slot specified by the <b>fpc-slot-number</b> value.</li> </ul> <p>Also display the status of the currently selected port parameter of the Status LED for each network port.</p>



**interconnect-device *name***—(QFabric systems only) (Optional) Display the front panel contents and LED status of all the ports on the Interconnect device.

**menu**—(Optional) Display the names of the menus and menu options that are currently enabled on the LCD panel.

**menu all-members**—(EX Series Virtual Chassis member switches or XRE200 External Routing Engines) (Optional) Display the names of the menus and menu options that are currently enabled on the LCD panel for all Virtual Chassis members.

**menu local**—(EX Series Virtual Chassis member switches or XRE200 External Routing Engines) (Optional) Display the names of the menus and menu options that are currently enabled on the LCD panel for the Virtual Chassis member from which you issued the command.

**menu member *member-id***—(EX Series Virtual Chassis member switches or XRE200 External Routing Engines) (Optional) Display the names of the menus and menu options that are currently enabled on the LCD panel for the specified Virtual Chassis member.

**node-device *name***—(QFabric systems only) (Optional) Display the front panel contents and LED status of all the ports on the Node device.

**Required Privilege Level**

view

**Related Documentation**

- LCD Panel in EX3200 Switches
- LCD Panel in EX4200 Switches
- LCD Panel in EX4500 Switches
- LCD Panel in an EX8200 Switch
- LCD Panel in an XRE200 External Routing Engine
- Configuring the LCD Panel on EX Series Switches (CLI Procedure)

**List of Sample Output**

[show chassis lcd \(Two-Member EX4200 Virtual Chassis\) on page 738](#)  
[show chassis lcd fpc-slot 1 \(EX4200 Virtual Chassis\) on page 739](#)  
[show chassis lcd \(EX8200 Switch\) on page 739](#)  
[show chassis lcd fpc-slot 2 \(EX8200 Switch\) on page 741](#)  
[show chassis lcd menu \(EX4200 Switch\) on page 741](#)  
[show chassis lcd menu \(EX8200 Switch\) on page 741](#)  
[show chassis lcd \(QFX3500 Switches\) on page 742](#)  
[show chassis lcd \(XRE200 External Routing Engine in EX8200 Virtual Chassis\) on page 742](#)

**Output Fields**

[Table 49 on page 737](#) lists the output fields for the **show chassis lcd** command. Output fields are listed in the approximate order in which they appear.



Table 49: show chassis lcd Output Fields

Field Name	Field Description
<b>member</b> <i>number</i> (XRE200 External Routing Engine)	Member ID of the device whose content is being displayed.
<b>Front panel contents for slot</b>  <b>Front panel contents</b> (EX6200, EX8200 switch, XRE200 External Routing Engine, and QFX Series)	<p>FPC slot number of the switch whose content is being displayed. The number is always <b>0</b>, except for EX4200 switches in a Virtual Chassis, where it is the member ID value.</p> <p>On EX6200 switches, EX8200 switches, and XRE200 External Routing Engines, no slot number is displayed.</p> <p>On XRE200 External Routing Engines, this field appears under the <b>member</b> <i>number</i> field for each member device in the EX8200 Virtual Chassis.</p>
<b>LCD screen</b>	<p>The first line displays the hostname (for Virtual Chassis members, displays the member ID, the current role, and hostname; for EX8200 switches, displays <b>RE</b> and the hostname). The second line displays the currently selected port parameter of the Status LED and the alarms counter. The Status LED port parameters are:</p> <ul style="list-style-type: none"> <li>• <b>ADM</b>—Administrative</li> <li>• <b>SPD</b>—Speed</li> <li>• <b>DPX</b>—Duplex</li> <li>• <b>POE</b>—Power over Ethernet (EX3200 and EX4200 switches only)</li> </ul>
<b>LEDs status</b>	Current state of the Alarms, System, and Master LEDs (chassis status LEDs).
<b>Interface</b>	Names of the interfaces on the switch.
<b>LED (ADM/SPD/DPX/POE)</b>	<p>State of the currently selected port parameter of the Status LED for the interface. The Status LED port parameters are:</p> <p><b>NOTE:</b> The XRE200 External Routing Engine always displays the <b>NA</b> parameter. The QFX Series products do not have any of the port parameters listed below.</p> <ul style="list-style-type: none"> <li>• <b>ADM</b>—Administrative</li> <li>• <b>SPD</b>—Speed</li> <li>• <b>DPX</b>—Duplex</li> <li>• <b>NA</b>—Not applicable.</li> <li>• <b>POE</b>—Power over Ethernet</li> </ul>
<b>fpcx</b>	On standalone EX Series switches and the QFX3500 switch, always <b>0</b> . On EX Series Virtual Chassis member switches, member ID of the Virtual Chassis member whose LCD menu is displayed.



## Sample Output

show chassis lcd  
(Two-Member EX4200  
Virtual Chassis)

```
user@switch> show chassis lcd
Front panel contents for slot: 0
-----
LCD screen:
  00:BK switch1
  LED:SPD ALARM 00
LEDs status:
  Alarms LED: Off
  System LED: Green
  Master LED: Off
Interface      LED(ADM/SPD/DPX/POE)
-----
ge-0/0/0       Off
ge-0/0/1       Off
ge-0/0/2       Off
ge-0/0/3       Off
ge-0/0/4       Off
ge-0/0/5       Off
ge-0/0/6       Off
ge-0/0/7       Off
ge-0/0/8       Off
ge-0/0/9       Off
ge-0/0/10      Off
ge-0/0/11      Off
ge-0/0/12      Off
ge-0/0/13      Off
ge-0/0/14      Off
ge-0/0/15      Off
ge-0/0/16      Off
ge-0/0/17      Off
ge-0/0/18      Off
ge-0/0/19      Off
ge-0/0/20      Off
ge-0/0/21      Off
ge-0/0/22      Off
ge-0/0/23      Off
Front panel contents for slot: 1
-----
LCD screen:
  01:RE switch2
  LED:SPD ALARM 01
LEDs status:
  Alarms LED: Yellow
  System LED: Green
  Master LED: Green
Interface      LED(ADM/SPD/DPX/POE)
-----
ge-1/0/0       Off
ge-1/0/1       Off
ge-1/0/2       Off
ge-1/0/3       Off
ge-1/0/4       Off
ge-1/0/5       Off
ge-1/0/6       Off
ge-1/0/7       Off
ge-1/0/8       Off
ge-1/0/9       Off
ge-1/0/10      Off
```



```

ge-1/0/11      Off
ge-1/0/12      Off
ge-1/0/13      Off
ge-1/0/14      Off
ge-1/0/15      Off
ge-1/0/16      Off
ge-1/0/17      Off
ge-1/0/18      Off
ge-1/0/19      Off
ge-1/0/20      Off
ge-1/0/21      Off
ge-1/0/22      Off
ge-1/0/23      Off

```

The output for the **show chassis lcd fpc-slot** command is the same as the output for the **show chassis lcd** command.

#### show chassis lcd fpc-slot 1 (EX4200 Virtual Chassis)

```

user@switch> show chassis lcd fpc-slot 1
Front panel contents for slot: 1
-----
LCD screen:
  01:RE switch2
  LED:SPD ALARM 01
LEDs status:
  Alarms LED: Yellow
  System LED: Green
  Master LED: Green
Interface      LED (ADM/SPD/DPX/POE)
-----
ge-1/0/0       Off
ge-1/0/1       Off
ge-1/0/2       Off
ge-1/0/3       Off
ge-1/0/4       Off
ge-1/0/5       Off
ge-1/0/6       Off
ge-1/0/7       Off
ge-1/0/8       Off
ge-1/0/9       Off
ge-1/0/10      Off
ge-1/0/11      Off
ge-1/0/12      Off
ge-1/0/13      Off
ge-1/0/14      Off
ge-1/0/15      Off
ge-1/0/16      Off
ge-1/0/17      Off
ge-1/0/18      Off
ge-1/0/19      Off
ge-1/0/20      Off
ge-1/0/21      Off
ge-1/0/22      Off
ge-1/0/23      Off

```

#### show chassis lcd (EX8200 Switch)

```

user@switch> show chassis lcd
Front panel contents:
-----
LCD screen:

```



```
RE st-8200-r
LED:ADM ALARM 01
LEDs status:
  Alarms LED: Yellow
  System LED: Yellow
  Master LED: Green
Interface      LED(ADM/SPD/DPX)
```

```
-----
ge-0/0/0      Off
ge-0/0/1      Off
ge-0/0/2      Off
ge-0/0/3      Off
ge-0/0/4      Off
ge-0/0/5      Off
ge-0/0/6      Off
ge-0/0/7      Off
ge-0/0/8      Off
ge-0/0/9      Off
ge-0/0/10     Off
ge-0/0/11     Off
ge-0/0/12     Off
ge-0/0/13     Off
ge-0/0/14     Off
ge-0/0/15     Off
ge-0/0/16     Off
ge-0/0/17     Off
ge-0/0/18     Off
ge-0/0/19     Off
ge-0/0/20     Off
ge-0/0/21     Off
ge-0/0/22     Off
ge-0/0/23     Off
ge-0/0/24     Off
ge-0/0/25     Off
ge-0/0/26     Off
ge-0/0/27     Off
ge-0/0/28     Off
ge-0/0/29     Off
ge-0/0/30     Off
ge-0/0/31     Off
ge-0/0/32     Off
ge-0/0/33     Off
ge-0/0/34     Off
ge-0/0/35     Off
ge-0/0/36     Off
ge-0/0/37     Off
ge-0/0/38     Off
ge-0/0/39     Off
ge-0/0/40     Off
ge-0/0/41     Off
ge-0/0/42     Off
ge-0/0/43     Off
ge-0/0/44     Off
ge-0/0/45     Off
ge-0/0/46     Off
ge-0/0/47     Off
xe-2/0/0      Off
xe-2/0/1      Off
xe-2/0/2      Off
xe-2/0/3      Off
xe-2/0/4      Off
```



```

xe-2/0/5      Off
xe-2/0/6      Off
xe-2/0/7      Off
xe-3/0/0      Off
xe-3/0/1      Off
xe-3/0/2      Off
xe-3/0/3      Off
xe-3/0/4      Off
xe-3/0/5      Off
xe-3/0/6      Off
xe-3/0/7      Off
xe-5/0/0      Off
xe-5/0/1      Off
xe-5/0/2      Off
xe-5/0/3      Off
xe-5/0/4      Off
xe-5/0/5      Off
xe-5/0/6      On
xe-5/0/7      On
xe-7/0/5      Off

```

#### show chassis lcd fpc-slot 2 (EX8200 Switch)

#### show chassis lcd fpc-slot 2

Interface	LED (ADM/SPD/DPX)
xe-2/0/0	Off
xe-2/0/1	Off
xe-2/0/2	Off
xe-2/0/3	Off
xe-2/0/4	Off
xe-2/0/5	Off
xe-2/0/6	Off
xe-2/0/7	Off

#### show chassis lcd menu (EX4200 Switch)

```

user@switch> show chassis lcd menu
fpc0:

```

```

-----
status-menu
status-menu vcp-status
status-menu power-status
status-menu environ-menu
status-menu show-version
maintenance-menu
maintenance-menu halt-menu
maintenance-menu system-reboot
maintenance-menu rescue-config
maintenance-menu vc-uplink-config
maintenance-menu factory-default

```

On an EX4200 switch in a Virtual Chassis, the output for the **show chassis lcd menu all-members** command is the same as the output for the **show chassis lcd menu** command.

#### show chassis lcd menu (EX8200 Switch)

```

user@switch> show chassis lcd menu
status-menu
status-menu sf-status1-menu
status-menu sf-status2-menu
status-menu psu-status1-menu
status-menu psu-status2-menu

```



```
status-menu environ-menu
status-menu show-version
maintenance-menu
maintenance-menu halt-menu
maintenance-menu system-reboot
maintenance-menu rescue-config
maintenance-menu factory-default
```

**show chassis lcd**  
**(QFX3500 Switches)**

```
user@switch> show chassis lcd
Front panel contents for slot: 0
-----
LCD screen:
00:RE switch
ALARM 01
LEDs status:
Status/Beacon LED: Yellow Blinking
Interface STATUS LED ACTIVITY LED
-----
fte-0/1/0 Off Off
```

**show chassis lcd**  
**(XRE200 External**  
**Routing Engine in**

```
user@external-routing-engine> show chassis lcd
member0:
-----
Front panel contents:
```



EX8200 Virtual  
Chassis)

```

-----
LCD screen:
  RE ex8200-member0
  LED:ADM ALARM 04
LEDs status:
  Alarms LED: Red
  System LED: Yellow
  Master LED: Green

member1:
-----

member8:
-----
Front panel contents:
-----
LCD screen:
  BACKUP

member9:
-----
Front panel contents:
-----
LCD screen:
  09:RE xre200-member9
  LED: NA ALARM 01
Interface      LED(ADM/SPD/DPX/POE)
-----
ge-0/0/0       On
ge-0/0/1       On
ge-0/0/2       On
ge-0/0/3       On
ge-0/0/4       Off
ge-0/0/5       Off
ge-0/0/6       Off
ge-0/0/7       Off
ge-0/0/8       Off
ge-0/0/9       Off
ge-0/0/10      On
ge-0/0/11      Off
ge-0/0/12      Off
ge-0/0/13      Off
ge-0/0/14      Off
ge-0/0/15      Off
ge-0/0/16      Off
ge-0/0/17      Off
ge-0/0/18      Off
ge-0/0/19      Off
ge-0/0/20      Off
ge-0/0/21      Off
ge-0/0/22      Off
ge-0/0/23      Off
ge-0/0/24      Off
ge-0/0/25      Off
ge-0/0/26      Off
ge-0/0/27      Off
ge-0/0/28      Off
ge-0/0/29      Off
ge-0/0/30      Off
ge-0/0/31      Off
ge-0/0/32      Off

```



ge-0/0/33	Off
ge-0/0/34	Off
ge-0/0/35	Off
ge-0/0/36	Off
ge-0/0/37	Off
ge-0/0/38	Off
ge-0/0/39	Off
ge-0/0/40	On
ge-0/0/41	On
ge-0/0/42	On
ge-0/0/43	On
ge-0/0/44	On
ge-0/0/45	On
ge-0/0/46	On
ge-0/0/47	On
ge-16/0/0	On
ge-16/0/1	Off
ge-16/0/2	On
ge-16/0/3	Off
ge-16/0/4	On
ge-16/0/5	Off
ge-16/0/6	On
ge-16/0/7	Off
ge-16/0/8	Off
ge-16/0/9	Off
ge-16/0/10	Off
ge-16/0/11	Off
ge-16/0/12	Off
ge-16/0/13	On
ge-16/0/14	Off
ge-16/0/15	On
ge-16/0/16	Off
ge-16/0/17	On
ge-16/0/18	On
ge-16/0/19	On
ge-16/0/20	On
ge-16/0/21	Off
ge-16/0/22	On
ge-16/0/23	Off
ge-16/0/24	Off
ge-16/0/25	Off
ge-16/0/26	On
ge-16/0/27	Off
ge-16/0/28	Off
ge-16/0/29	Off
ge-16/0/30	On
ge-16/0/31	Off
ge-16/0/32	On
ge-16/0/33	On
ge-16/0/34	On
ge-16/0/35	Off
ge-16/0/36	On
ge-16/0/37	Off
ge-16/0/38	Off
ge-16/0/39	Off
ge-16/0/40	Off
ge-16/0/41	Off
ge-16/0/42	On
ge-16/0/43	Off
ge-16/0/44	Off
ge-16/0/45	Off



ge-16/0/46	Off
ge-16/0/47	Off
xe-19/0/0	Off
xe-19/0/1	On
xe-19/0/2	On
xe-19/0/3	On
xe-19/0/4	On
xe-19/0/5	On
ge-22/0/0	Off
ge-22/0/1	Off
ge-22/0/2	On
ge-22/0/3	Off
ge-22/0/4	On
ge-22/0/5	On
ge-22/0/6	On
ge-22/0/7	On
ge-22/0/8	Off
ge-22/0/9	Off
ge-22/0/10	Off
ge-22/0/11	Off
ge-22/0/12	Off
ge-22/0/13	Off
ge-22/0/14	Off
ge-22/0/15	Off
ge-22/0/16	On
ge-22/0/17	Off
ge-22/0/18	On
ge-22/0/19	Off
ge-22/0/20	On
ge-22/0/21	Off
ge-22/0/22	On
ge-22/0/23	Off
ge-22/0/24	On
ge-22/0/25	Off
ge-22/0/26	Off
ge-22/0/27	Off
ge-22/0/28	Off
ge-22/0/29	Off
ge-22/0/30	Off
ge-22/0/31	Off
ge-22/0/32	On
ge-22/0/33	Off
ge-22/0/34	On
ge-22/0/35	Off
ge-22/0/36	Off
ge-22/0/37	Off
ge-22/0/38	Off
ge-22/0/39	Off
ge-22/0/40	Off
ge-22/0/41	Off
ge-22/0/42	Off
ge-22/0/43	Off
ge-22/0/44	Off
ge-22/0/45	Off
ge-22/0/46	Off
ge-22/0/47	Off



## show chassis led

show chassis led (EX Series)	show chassis led <fpc-slot < <i>fpc-slot-number</i> >>
show chassis led (QFX Series)	show chassis led <fpc-slot < <i>fpc-slot-number</i> >> interconnect-device <i>name</i> node-device <i>name</i>
Release Information	Command introduced in Junos OS Release 10.1 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
Description	Display the status and colors of the chassis LEDs on the front panel of the switch. A major alarm (red) indicates a critical error condition that requires immediate action. A minor alarm (yellow) indicates a noncritical condition that requires monitoring or maintenance. A minor alarm that is left unchecked might cause interruption in service or performance degradation.
Options	<p><b>none</b>—Display the status of the chassis status LEDs (for EX4200 switches configured as a Virtual Chassis, display the information for all Virtual Chassis members).</p> <p><b>fpc-slot &lt;<i>fpc-slot-number</i>&gt;</b>—(Optional) (Not on EX2200 switches) Display the information as follows:</p> <ul style="list-style-type: none"> <li>(EX3200, standalone EX4200, standalone QFX3500, and EX4500 switches) Display the status of the chassis status LEDs for either an FPC slot with no <i>fpc-slot-number</i> value specified or for the FPC slot specified by <b>fpc-slot 0</b>. <b>fpc-slot</b> refers to the switch itself and <b>0</b> is the only valid value for <i>fpc-slot-number</i>. Output for these options is the same as for the <b>none</b> option.</li> <li>(EX4200 switches in a Virtual Chassis with two or more members) If no <i>fpc-slot-number</i> value is specified, display the status of the chassis status LEDs for all members of the Virtual Chassis. Output for this option is the same as for the <b>none</b> option. If the <i>fpc-slot-number</i> value is specified (it equals the <i>member-id</i> value), display the status of the chassis status LEDs for the specified member.</li> <li>(EX8200 switches)—Display the status of the chassis status LEDs for the line card in the line-card slot specified by the <i>fpc-slot-number</i> value.</li> </ul> <p><b>interconnect-device <i>name</i></b>—</p> <p>— (QFabric systems only) (Optional) Display the status of the chassis and interface status LEDs for the Interconnect device.</p> <p><b>node-device <i>name</i></b>— (QFabric systems only) (Optional) Display the status of the chassis and interface status LEDs for the Node device.</p>
Required Privilege Level	view



**Related Documentation**

- Chassis Status LEDs in EX2200 Switches
- Chassis Status LEDs in EX3200 Switches
- Chassis Status LEDs in EX4200 Switches
- Chassis Status LEDs in EX4500 Switches
- Chassis Status LEDs in an EX8200 Switch
- Chassis Status LEDs on a QFX3500 Device
- Chassis Status LEDs in the QFX3600 and QFX3600-I Device
- Management Port LEDs on a QFX3500 Device
- Management Port LEDs in the QFX3600 and QFX3600-I Device
- Chassis Status LEDs on a QFX3008-I Interconnect Device
- Control Board LEDs on a QFX3008-I Interconnect Device

**List of Sample Output**

[show chassis led \(EX2200 Switch\) on page 751](#)  
[show chassis led on page 751](#)  
[show chassis led fpc-slot 0 on page 752](#)  
[show chassis led \(EX Series\) on page 752](#)  
[show chassis led node-device \(QFabric System Node Device\) on page 753](#)  
[show chassis led interconnect-device \(QFabric System - QFX3600-I Interconnect Device\) on page 754](#)  
[show chassis led interconnect-device \(QFabric System - QFX3008-I Interconnect Device\) on page 754](#)

**Output Fields**

Table 36 on page 419 lists the output fields for the **show chassis led** command. Output fields are listed in the approximate order in which they appear.

**Table 50: show chassis led Output Fields**

Field Name	Field Description
<b>Front panel contents for slot</b>	FPC slot number of the device whose content is being displayed. The number is always 0, except for EX4200 switches in a Virtual Chassis, where it is the member ID value.
<b>Front panel contents</b> (EX8200 Switches)	
<b>Front Panel Module Information</b> (QFabric system QFX3008-I Interconnect device)	On EX8200 switches, no slot number is displayed.
<b>Front panel contents for</b> (QFabric system Node devices and QFX3600-I Interconnect devices)	On QFabric system Node devices, the name of the Node device whose content is being displayed.
<b>Alarms LED</b>	(EX Series switches only) Displays status of the ALM LED: <ul style="list-style-type: none"> <li>• Off—No alarm has been configured.</li> <li>• Green—No alarm has been triggered.</li> <li>• Red—Major alarm.</li> <li>• Yellow—Minor alarm</li> </ul>



Table 50: show chassis led Output Fields (*continued*)

Field Name	Field Description
<b>System LED</b>	<p>(EX Series switches only) Displays status of the SYS LED:</p> <ul style="list-style-type: none"> <li>• Off—Switch is powered off.</li> <li>• Green—Switch is operating normally.</li> <li>• Yellow—Switch is booting.</li> </ul>
<b>Master LED:</b>	<p>Displays status of the MST LED (on EX3200, EX4200, and EX8200 switches):</p> <ul style="list-style-type: none"> <li>• Green—On an EX4200 Virtual Chassis switch, indicates the switch is the master in the Virtual Chassis configuration. On other switches, indicates that the Routing Engine is operational.</li> <li>• Off <ul style="list-style-type: none"> <li>• On an EX4200 Virtual Chassis switch, indicates that this switch is not the master in the Virtual Chassis configuration.</li> <li>• On EX3200, standalone EX4200, and EX8200 switches, indicates that the Routing Engine is not operational.</li> </ul> </li> </ul>
<b>Mode LED:</b>	<p>(EX Series switches only) On an EX2200 switch only, displays the currently selected port parameter of the Status LED:</p> <ul style="list-style-type: none"> <li>• <b>ADM</b>—Administrative</li> <li>• <b>SPD</b>—Speed</li> <li>• <b>DPX</b>—Duplex</li> <li>• <b>POE</b>—Power over Ethernet</li> </ul>
<b>Status/Beacon LED</b>	<p>(QFX Series only) Displays the system status as indicated by the Status LED on the chassis. For more information, see:</p> <ul style="list-style-type: none"> <li>• Chassis Status LEDs on a QFX3500 Device</li> <li>• Chassis Status LEDs in the QFX3600 and QFX3600-I Device</li> </ul>
<b>LINK/SPEED LED</b>	<p>(QFX Series only) Displays the link status and speed of a management port. For more information, see:</p> <ul style="list-style-type: none"> <li>• Management Port LEDs on a QFX3500 Device</li> <li>• Management Port LEDs in the QFX3600 and QFX3600-I Device</li> </ul>
<b>ACTIVITY LED</b>	<p>(QFX Series only) Displays the activity status of a management port. For more information, see:</p> <ul style="list-style-type: none"> <li>• Management Port LEDs on a QFX3500 Device</li> <li>• Management Port LEDs in the QFX3600 and QFX3600-I Device</li> </ul>
<b>STATUS LED</b>	<p>(QFX Series only) Displays the link status of an interface as indicated by the ST LED. For more information, see:</p> <ul style="list-style-type: none"> <li>• Control Board LEDs on a QFX3008-I Interconnect Device</li> <li>• Access Port and Uplink Port LEDs on a QFX3500 Device</li> <li>• Access Port and Uplink Port LEDs on a QFX3600 or QFX3600-I Device</li> </ul>



Table 50: show chassis led Output Fields (*continued*)

Field Name	Field Description
<b>LINK/ACTIVITY LED</b>	<p>(QFX Series only) Displays link activity or faults on an interface as indicated by the LA LED. For more information, see:</p> <ul style="list-style-type: none"> <li>Access Port and Uplink Port LEDs on a QFX3500 Device</li> <li>Access Port and Uplink Port LEDs on a QFX3600 or QFX3600-I Device</li> </ul>
<b>Status LED</b>	<p>(QFX3008-I Interconnect device only)</p> <ul style="list-style-type: none"> <li>Displays the system status as indicated by the STATUS LED on the front panel of the chassis. For more information, see Chassis Status LEDs on a QFX3008-I Interconnect Device.</li> <li>Displays the status of a Control Board as indicated by the STATUS LED on the Control Board. For more information, see Control Board LEDs on a QFX3008-I Interconnect Device.</li> </ul>
<b>Power LED</b>	<p>(QFX3008-I Interconnect device only) Displays the status of system power on the device. For more information, see Chassis Status LEDs on a QFX3008-I Interconnect Device.</p>
<b>Major Alarm LED</b>	<p>(QFX3008-I Interconnect device only) Displays whether a critical error condition that requires immediate action exists on the device. For more information, see Chassis Status LEDs on a QFX3008-I Interconnect Device.</p>
<b>Minor Alarm LED</b>	<p>(QFX3008-I Interconnect device only) Displays whether a noncritical condition that requires monitoring or maintenance exists on the device. For more information, see Chassis Status LEDs on a QFX3008-I Interconnect Device.</p>
<b>Fan 0 LED</b>	<p>(QFX3008-I Interconnect device only) Displays the status of fan trays on the device. For more information, see Chassis Status LEDs on a QFX3008-I Interconnect Device.</p>
<b>Fan 1 LED</b>	
<b>Fan 2 LED</b>	
<b>Fan 3 LED</b>	
<b>Fan 4 LED</b>	
<b>Fan 5 LED</b>	
<b>Fan 6 LED</b>	
<b>Fan 7 LED</b>	
<b>Fan 8 LED</b>	
<b>PEM 0 LED</b>	<p>(QFX3008-I Interconnect device only) Displays the status of power supplies on the device. For more information, see Chassis Status LEDs on a QFX3008-I Interconnect Device.</p>
<b>PEM 1 LED</b>	
<b>PEM 2 LED</b>	
<b>PEM 3 LED</b>	
<b>PEM 4 LED</b>	



Table 50: show chassis led Output Fields (*continued*)

Field Name	Field Description
<b>LED info for</b>	(QFX3008-I Interconnect device only) Displays the LED information for a Control Board.
<b>Mastership LED</b>	(QFX3008-I Interconnect device only) Displays status of the MASTER LED on a Control Board. For more information, see Control Board LEDs on a QFX3008-I Interconnect Device.
<b>Interface</b>	Names of the interfaces on the device.
<b>LED (ADM/SPD/DPX/POE)</b>	<p>(EX Series switches only) State of the currently selected port parameter of the Status LED for the interface. The Status LED port parameters are:</p> <p><b>NOTE:</b> EX4500 and EX8200 switches do not have the POE port parameter.</p> <ul style="list-style-type: none"><li>• <b>ADM</b>—Administrative</li><li>• <b>SPD</b>—Speed</li><li>• <b>DPX</b>—Duplex</li><li>• <b>POE</b>—Power over Ethernet</li></ul>



## Sample Output

### show chassis led (EX2200 Switch)

```

user@switch> show chassis led
Front panel contents for slot: 0
-----
LEDs status:
  Alarms LED: Amber
  System LED: Green
  Mode LED  : Duplex
Interface    LED(ADM/SPD/DPX/POE)
-----
ge-0/0/0      Off
ge-0/0/1      Full Duplex
ge-0/0/2      Full Duplex
ge-0/0/3      Off
ge-0/0/4      Off
ge-0/0/5      Full Duplex
ge-0/0/6      Full Duplex
ge-0/0/7      Full Duplex
ge-0/0/8      Full Duplex
ge-0/0/9      Full Duplex
ge-0/0/10     Full Duplex
ge-0/0/11     Full Duplex
ge-0/0/12     Full Duplex
ge-0/0/13     Full Duplex
ge-0/0/14     Full Duplex
ge-0/0/15     Full Duplex
ge-0/0/16     Full Duplex
ge-0/0/17     Full Duplex
ge-0/0/18     Full Duplex
ge-0/0/19     Full Duplex
ge-0/0/20     Full Duplex
ge-0/0/21     Full Duplex
ge-0/0/22     Off
ge-0/0/23     Off
ge-0/0/24     Full Duplex
ge-0/0/25     Full Duplex
ge-0/0/26     Off
ge-0/0/27     Off
ge-0/0/28     Full Duplex
ge-0/0/29     Full Duplex

```

### show chassis led

```

user@switch> show chassis led

Front panel contents for slot: 0
-----
LEDs status:
  Alarms LED: Off
  System LED: Green
  Master LED: Green
Interface    LED(ADM/SPD/DPX/POE)
-----
ge-0/0/0      Off
ge-0/0/1      Full Duplex
ge-0/0/2      Full Duplex
ge-0/0/3      Off
ge-0/0/4      Off
ge-0/0/5      Full Duplex
ge-0/0/6      Full Duplex

```



```

ge-0/0/7      Full Duplex
ge-0/0/8      Full Duplex
ge-0/0/9      Full Duplex
ge-0/0/10     Full Duplex
ge-0/0/11     Full Duplex
ge-0/0/12     Full Duplex
ge-0/0/13     Full Duplex
ge-0/0/14     Full Duplex
ge-0/0/15     Full Duplex
ge-0/0/16     Full Duplex
ge-0/0/17     Full Duplex
ge-0/0/18     Full Duplex
ge-0/0/19     Full Duplex
ge-0/0/20     Full Duplex
ge-0/0/21     Full Duplex
ge-0/0/22     Off
ge-0/0/23     Off
ge-0/0/24     Full Duplex
ge-0/0/25     Full Duplex
ge-0/0/26     Off
ge-0/0/27     Off
ge-0/0/28     Full Duplex
ge-0/0/29     Full Duplex

```

#### show chassis led fpc-slot 0

```

user@switch> show chassis led fpc-slot 0
Front panel contents for slot: 0

```

```

-----
LEDs status:
  Alarms LED: Red
  System LED: Green
  Master LED: Green
Interface      LED(ADM/SPD/DPX/POE)
-----
ge-0/0/0      Off
ge-0/0/1      Off
ge-0/0/2      Off
ge-0/0/3      Off
ge-0/0/4      Off
ge-0/0/5      Off
ge-0/0/6      Off
ge-0/0/7      Off
ge-0/0/8      Off
ge-0/0/9      Off
ge-0/0/10     Off
ge-0/0/11     Off
ge-0/0/12     Off
ge-0/0/13     Off
ge-0/0/14     Off
ge-0/0/15     Off
ge-0/0/16     Off
ge-0/0/17     Off
ge-0/0/18     Off
ge-0/0/19     Off
ge-0/0/20     Off
ge-0/0/21     Off
ge-0/0/22     Off
ge-0/0/23     Off

```

#### show chassis led (EX)

```

user@switch> show chassis led
Front panel contents for slot: 0

```



Series)

```

-----
LEDs status:
Alarms LED: Amber
Status LED: Green
Mode LED : Duplex
Interface LED(ADM/SPD/DPX/POE)
-----
ge-0/0/0 Off
ge-0/0/1 Full Duplex
ge-0/0/2 Full Duplex
ge-0/0/3 Off
ge-0/0/4 Off
ge-0/0/5 Full Duplex
ge-0/0/6 Full Duplex
ge-0/0/7 Full Duplex
ge-0/0/8 Full Duplex
ge-0/0/9 Full Duplex
ge-0/0/10 Full Duplex
ge-0/0/11 Full Duplex
ge-0/0/12 Full Duplex
ge-0/0/13 Full Duplex
ge-0/0/14 Full Duplex
ge-0/0/15 Full Duplex
ge-0/0/16 Full Duplex
ge-0/0/17 Full Duplex
ge-0/0/18 Full Duplex
ge-0/0/19 Full Duplex
ge-0/0/20 Full Duplex
ge-0/0/21 Full Duplex
ge-0/0/22 Off
ge-0/0/23 Off
ge-0/0/24 Full Duplex
ge-0/0/25 Full Duplex
ge-0/0/26 Off
ge-0/0/27 Off
ge-0/0/28 Full Duplex
ge-0/0/29 Full Duplex

```

show chassis led  
node-device (QFabric  
System Node Device)

```

user@switch> show chassis led node-device node1
Front panel contents for: node1
LEDs status:
  Status/Beacon LED: Yellow Blinking

```

Interface	LINK/SPEED LED	ACTIVITY LED
node1:me5	Green	N/A
node1:me6	Green	N/A

Interface	STATUS LED	LINK/ACTIVITY LED
node1:xe-0/0/8	Green	Green
node1:ge-0/0/10	Green	Green
node1:ge-0/0/12	Green	Green
node1:ge-0/0/24	Green	Green
node1:ge-0/0/25	Green	Green
node1:ge-0/0/26	Green	Green
node1:ge-0/0/27	Green	Green
node1:ge-0/0/28	Green	Green
node1:ge-0/0/29	Green	Green
node1:ge-0/0/30	Green	Green
node1:ge-0/0/31	Green	Green



node1:ge-0/0/32	Green	Green
node1:ge-0/0/33	Green	Green
node1:ge-0/0/34	Green	Green
node1:ge-0/0/35	Green	Green
node1:ge-0/0/36	Green	Green
node1:ge-0/0/37	Green	Green
node1:ge-0/0/38	Green	Green
node1:ge-0/0/39	Green	Green
node1:fte-0/1/0	Green	Green Blinking
node1:fte-0/1/2	Green	Green Blinking

show chassis led  
interconnect-device  
(QFabric System -  
QFX3600-I  
Interconnect Device)

```
user@switch> show chassis led interconnect-device IC-EG0712
Front panel contents for: FPC 0
```

LEDs status:

Status/Beacon LED: Yellow Blinking

Interface	LINK/SPEED LED	ACTIVITY LED
IC-EG0712:me5	Green	N/A
IC-EG0712:me6	Green	N/A

Interface	STATUS LED	LINK/ACTIVITY LED
IC-EG0712:fte-0/1/0	Green	Green
IC-EG0712:fte-0/1/1	Green	Green Blinking
IC-EG0712:fte-0/1/2	Green	Green
IC-EG0712:fte-0/1/3	Green	Green Blinking
IC-EG0712:fte-0/1/4	Green	Green
IC-EG0712:fte-0/1/5	Green	Green Blinking
IC-EG0712:fte-0/1/6	Green	Green
IC-EG0712:fte-0/1/7	Green	Green
IC-EG0712:fte-0/1/8	Green	Green Blinking
IC-EG0712:fte-0/1/9	Green	Green Blinking
IC-EG0712:fte-0/1/10	Green	Green Blinking

show chassis led  
interconnect-device  
(QFabric System -

```
user@switch> show chassis led interconnect-device IC-EG0712
Front Panel Module Information
```

LEDs status:



### QFX3008-I Interconnect Device)

Status LED: Green  
 Power LED : Yellow Blinking  
 Major Alarm LED: Red  
 Minor Alarm LED: Yellow  
 Fan 0 LED : Green  
 Fan 1 LED : Green  
 Fan 2 LED : Green  
 Fan 3 LED : Green  
 Fan 4 LED : Green  
 Fan 5 LED : Green  
 Fan 6 LED : Green  
 Fan 7 LED : Green  
 Fan 8 LED : Green  
 Fan 9 LED : Green  
 PEM 0 LED : Green  
 PEM 1 LED : Green  
 PEM 2 LED : Green  
 PEM 3 LED : off  
 PEM 4 LED : Yellow Blinking  
 PEM 5 LED : off

LED info for: CB - 0

LEDs status:

Status LED: Green  
 Mastership LED: Green

Interface	STATUS LED	LINK/ACTIVITY LED
IC-F4899:pme0 :	Green	N/A
IC-F4899:pme1 :	off	N/A
IC-F4899:pme2 :	off	N/A
IC-F4899:pme3 :	off	N/A

LED info for: CB - 1

LEDs status:

Status LED: Green  
 Mastership LED: Amber

Interface	STATUS LED	LINK/ACTIVITY LED
IC-F4899:pme0 :	Green	N/A
IC-F4899:pme1 :	off	N/A
IC-F4899:pme2 :	off	N/A
IC-F4899:pme3 :	off	N/A

LED info for: FC 0 FPC - 0

LEDs status:

Status LED: Green

Interface	STATUS LED	LINK/ACTIVITY LED
IC-F4899:fte-0/0/0	Green	N/A
IC-F4899:fte-0/0/1	Green	N/A
IC-F4899:fte-0/0/2	Green	N/A
IC-F4899:fte-0/0/3	Green	N/A
IC-F4899:fte-0/0/4	Green	N/A
IC-F4899:fte-0/0/5	Green	N/A
IC-F4899:fte-0/0/6	Green	N/A



IC-F4899:fte-0/0/7	Green	N/A
IC-F4899:fte-0/0/8	Green	N/A
IC-F4899:fte-0/0/9	Green	N/A
IC-F4899:fte-0/0/10	Green	N/A
IC-F4899:fte-0/0/11	Green	N/A
IC-F4899:fte-0/0/12	Green	N/A
IC-F4899:fte-0/0/13	Green	N/A
IC-F4899:fte-0/0/14	Green	N/A
IC-F4899:fte-0/0/15	Green	N/A

LED info for: FC 1 FPC - 1

-----  
LEDs status:

Status LED: Green

Interface	STATUS LED	LINK/ACTIVITY LED
IC-F4899:fte-1/0/0	Green	N/A
IC-F4899:fte-1/0/1	Green	N/A

LED info for: RC 2 FPC - 10

-----  
LEDs status:

Status LED: Green

LED info for: RC 3 FPC - 11

-----  
LEDs status:

Status LED: Green



## show chassis location

<b>Syntax</b>	show chassis location
<b>Syntax (TX Matrix Router)</b>	show chassis location <fpc   interface (by-name <i>name</i>   by-slot fpc <i>number</i> lcc <i>number</i> )   lcc <i>number</i>   scc>
<b>Syntax (TX Matrix Plus Router)</b>	show chassis location <fpc   interface (by-name <i>name</i>   by-slot fpc <i>number</i> lcc <i>number</i> )   lcc <i>number</i>   sfc <i>number</i> >
<b>Syntax (MX Series Router)</b>	show chassis location <all-members> <local> <member <i>member-id</i> >
<b>Syntax (QFX Series)</b>	show chassis location <interconnect-device <i>name</i> > <node-device <i>name</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the physical location of the chassis. This command can only be used on the master Routing Engine.
<b>Options</b>	<p><b>none</b>—Display all information about the physical location of the chassis. On a TX Matrix router, display all information about the physical location of the TX Matrix router and its attached T640 routers. On a TX Matrix Plus router, display all information about the physical location of the TX Matrix Plus router and its attached T1600 routers.</p> <p><b>all-members</b>—(MX Series routers only) (Optional) Display the physical location of the chassis for all the member routers in the Virtual Chassis configuration.</p> <p><b>fpc</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) Display the physical location of all Flexible PIC Concentrators (FPCs).</p> <p><b>interconnect-device <i>name</i></b>—(QFabric systems only) (Optional) Display the physical location of the Interconnect device.</p> <p><b>interface by-name <i>name</i></b>—(TX Matrix and TX Matrix Plus routers only) (Optional) Display the physical location of a specified interface name. On a TX Matrix router, this option displays the FPC number and T640 router (or line-card chassis) number associated with the specified interface. On a TX Matrix Plus router, this option displays the FPC number and T1600 router (or line-card chassis) number associated with the specified interface.</p> <p><b>interface by-slot fpc <i>number</i> lcc <i>number</i></b>—(TX Matrix and TX Matrix Plus router only) (Optional) On a TX Matrix router, display the global FPC number of an interface by</p>



specifying its local FPC number and T640 router (or line-card chassis) number. On a TX Matrix Plus router, display the global FPC number of an interface by specifying its local FPC number and T1600 router (or line-card chassis) number.

- The global FPC number is the FPC slot number when all the FPC slots in the routing matrix are considered: **0** through **31**. The local FPC number is the FPC slot number on a particular T640 router.
- For **fpc**, replace **number** with a value from **0** through **7**.
- For **lcc**, replace **number** with a value from **0** through **3**.

**lcc number**—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display the physical location of a specified T640 router (or line-card chassis) that is connected to a TX Matrix router. On a TX Matrix Plus router, display the physical location of a specified T1600 router (or line-card chassis) that is connected to a TX Matrix Plus router. Replace **number** with a value from **0** through **3**.

**local**—(MX Series routers only) (Optional) Display the physical location of the chassis for the local Virtual Chassis member.

**member member-id**—(MX Series routers only) (Optional) Display the physical location of the chassis for the specified member of the Virtual Chassis configuration. Replace **member-id** with a value of **0** or **1**.

**node-device name**—(QFabric systems only) (Optional) Display the physical location of the Node device.

**scc**—(TX Matrix routers only) (Optional) Display the physical location of the TX Matrix router (or switch-card chassis).

**sfc**—(TX Matrix Plus routers only) (Optional) Display the physical location of the TX Matrix Plus router (or switch-fabric chassis).

**Required Privilege Level** view

**List of Sample Output** [show chassis location on page 759](#)  
[show chassis location fpc \(TX Matrix Router\) on page 759](#)  
[show chassis location interface by-slot \(TX Matrix Router\) on page 759](#)  
[show chassis location fpc \(TX Matrix Plus Router\) on page 759](#)  
[show chassis location interface by-slot \(TX Matrix Plus Router\) on page 759](#)  
[show chassis location \(QFX3500 Switches\) on page 760](#)  
[show chassis location \(QFabric Systems\) on page 760](#)

**Output Fields** [Table 51 on page 758](#) lists the output fields for the **show chassis location** command. Output fields are listed in the approximate order in which they appear.

**Table 51: show chassis location Output Fields**

Field Name	Field Description
country-code	Country code information.



Table 51: show chassis location Output Fields (*continued*)

Field Name	Field Description
<b>postal-code</b>	Postal code information.
<b>Building</b>	Building information.
<b>Floor</b>	Floor information.
<b>Global FPC</b>	Global FPC number. The FPC slot number, when all FPC slots in the routing matrix are considered. The range of values is <b>0</b> through <b>31</b> .
<b>LCC</b>	Line-card chassis number. On a TX Matrix router, the number of a particular T640 router connected to the TX Matrix router. On a TX Matrix Plus router, the number of a particular T1600 router connected to the TX Matrix Plus router.
<b>Local FPC</b>	Local FPC number. On a TX Matrix router, the FPC slot number on a particular T640 router. On a TX Matrix Plus router, the FPC slot number on a particular T1600 router.

## Sample Output

**show chassis location**      user@host> **show chassis location**  
country-code: US  
postal-code: 94404  
Building: Building 2, Floor: 2

**show chassis location fpc (TX Matrix Router)**      user@host> **show chassis location fpc**  
Global FPC      LCC      Local FPC  
17                2                1  
21                2                5

**show chassis location interface by-slot (TX Matrix Router)**      user@host> **show chassis location interface by-slot fpc 1 lcc 1**  
Global FPC: 9

**show chassis location fpc (TX Matrix Plus Router)**      user@host> **show chassis location fpc**  
Global FPC      LCC      Local FPC  
0                0                0  
1                0                1

**show chassis location interface by-slot**      user@host> **show chassis location interface by-slot fpc 2 lcc 1**  
Global FPC: 10



(TX Matrix Plus  
Router)

**show chassis location**  
(QFX3500 Switches)

```
user@switch> show chassis location
country-code: US
postal-code: 94404
Building: Building 2, Floor: 2
```

**show chassis location**  
(QFabric Systems)

```
user@switch> show chassis location interconnect-device interconnect1
country-code: US
postal-code: 94404
Building: Building 2, Floor: 2
```



## show chassis mac-addresses

<b>Syntax</b>	show chassis mac-addresses
<b>Syntax (TX Matrix Router)</b>	show chassis mac-addresses <lcc <i>number</i>   scc>
<b>Syntax (TX Matrix Plus Router)</b>	show chassis mac-addresses <lcc <i>number</i>   sfc <i>number</i> >
<b>Syntax (MX Series Router)</b>	show chassis mac-addresses <all-members> <local> <member <i>member-id</i> >
<b>Syntax (MX2010 3D Universal Edge Routers)</b>	show chassis mac-addresses
<b>Syntax (MX2020 3D Universal Edge Routers)</b>	show chassis mac-addresses
<b>Syntax (QFX Series)</b>	show chassis mac-addresses <interconnect-device <i>name</i> > <node-group <i>name</i> >
<b>Syntax (ACX Series Universal Access Routers)</b>	show chassis mac-addresses
<b>Release Information</b>	<p>Command introduced before JUNOS Release 7.4.</p> <p>Command introduced in JUNOS Release 9.0 for EX Series switches.</p> <p><b>sfc</b> option introduced for the TX Matrix Plus router in JUNOS Release 9.6.</p> <p>Command introduced in Junos OS Release 11.1 for QFX Series.</p> <p>Command introduced in Junos OS Release 12.2 for ACX Series Universal Access Routers.</p> <p>Command introduced in Junos OS Release 12.3 for MX2020 3D Universal Edge Routers.</p> <p>Command introduced in Junos OS Release 12.3 for MX2010 3D Universal Edge Routers.</p>
<b>Description</b>	Display the media access control (MAC) addresses for the router, switch chassis, or switch.
<b>Options</b>	<p><b>none</b>—(TX Matrix, TX Matrix Plus routers, and the QFX Series) Display the MAC addresses for the router chassis or switch. On a TX Matrix router, display MAC addresses on the TX Matrix router and its attached T640 routers. On a TX Matrix Plus router, display MAC addresses on the TX Matrix Plus router and its attached T1600 routers.</p> <p><b>all-members</b>—(MX Series routers only) (Optional) Display the MAC addresses for all the member routers of the Virtual Chassis configuration.</p> <p><b>interconnect-device <i>name</i></b>—(QFabric systems only) (Optional) Display the MAC addresses for the Interconnect device.</p>



**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display MAC addresses for a specified T640 router (or line-card chassis) that is connected to the TX Matrix Plus router. On a TX Matrix Plus router, display MAC addresses for a specified T640 router (or line-card chassis) that is connected to the TX Matrix Plus router. Replace ***number*** with a value from **0** through **3**.

**local**—(MX Series routers only) (Optional) Display the MAC addresses for the local Virtual Chassis member.

**member *member-id***—(MX Series routers only) (Optional) Display the MAC addresses for the specified member of the Virtual Chassis configuration. Replace ***member-id*** with a value of 0 or 1.

**node-group *name***—(QFabric systems only) (Optional) Display the MAC addresses for the specified Node group.

**scc**—(TX Matrix routers only) (Optional) Display MAC addresses for the TX Matrix router (or switch-card chassis).

**sfc *number***—(TX Matrix Plus routers only) (Optional) Display MAC addresses for the TX Matrix Plus router (or switch-fabric chassis).

**Required Privilege Level** view

**Related Documentation**

- ACX2000 and ACX2100 Routers Hardware and CLI Terminology Mapping

**List of Sample Output** [show chassis mac-addresses on page 764](#)  
[show chassis mac-addresses \(MX2010 Router\) on page 764](#)  
[show chassis mac-addresses \(MX2020 Router\) on page 764](#)  
[show chassis mac-addresses \(TX Matrix Router\) on page 764](#)  
[show chassis mac-addresses \(TX Matrix Plus Router\) on page 764](#)  
[show chassis mac-addresses \(QFX3500 Switches\) on page 765](#)  
[show chassis mac-addresses interconnect-device \(QFabric Systems\) on page 765](#)  
[show chassis mac-addresses node-group \(QFabric Systems\) on page 765](#)  
[show chassis mac-addresses \(ACX2000 Universal Access Router\) on page 766](#)

**Output Fields** [Table 52 on page 762](#) lists the output fields for the **show chassis mac-addresses** command. Output fields are listed in the approximate order in which they appear.

**Table 52: show chassis mac-addresses Output Fields**

Field Name	Field Description
MAC address information	
Public base address	Base address of the MAC addresses allocated to this router or switch.
Public count	Number of allocated public addresses.



Table 52: show chassis mac-addresses Output Fields (*continued*)

Field Name	Field Description
<b>Private base address</b>	Base address of the private MAC addresses allocated to this router or switch.
<b>Private count</b>	Number of allocated private addresses.



## Sample Output

### show chassis mac-addresses

```
user@host> show chassis mac-addresses
MAC address information
  Public base address  0:90:69:0:4:0
  Public count         1008
  Private base address 0:90:69:0:7:f0
  Private count        16
```

### show chassis mac-addresses (MX2010 Router)

```
user@host> show chassis mac-addresses
MAC address information:
  Public base address  64:87:88:04:50:00
  Public count         1984
  Private base address 64:87:88:04:57:c0
  Private count        64
```

### show chassis mac-addresses (MX2020 Router)

```
user@host> show chassis mac-addresses
MAC address information:
  Public base address  2c:21:72:70:20:00
  Public count         4032
  Private base address 2c:21:72:70:2f:c0
  Private count        64
```

### show chassis mac-addresses (TX Matrix Router)

```
user@host> show chassis mac-addresses
scc-re0:
-----
MAC address information:
  Public base address  00:05:85:9e:cc:00
  Public count         8064
  Private base address 00:05:85:9e:eb:80
  Private count        128
lcc0-re0:
-----
MAC address information:
  Public base address  00:05:85:68:98:00
  Public count         2032
  Private base address 00:05:85:68:9f:f0
  Private count        16
lcc2-re0:
-----
MAC address information:
  Public base address  00:05:85:68:78:00
  Public count         2032
  Private base address 00:05:85:68:7f:f0
  Private count        16
```

### show chassis mac-addresses (TX Matrix Plus Router)

```
user@host> show chassis mac-addresses
sfc0-re0:
-----
MAC address information:
  Public base address  00:1d:b5:14:00:00
  Public count         65023
  Private base address 00:1d:b5:14:fd:ff
  Private count        512

lcc0-re0:
```



```

-----
MAC address information:
  Public base address    00:1f:12:7a:84:00
  Public count           2032
  Private base address   00:1f:12:7a:8b:f0
  Private count          16

```

```
lcc1-re0:
```

```

-----
MAC address information:
  Public base address    00:22:83:42:48:00
  Public count           2032
  Private base address   00:22:83:42:4f:f0
  Private count          16

```

```
lcc2-re0:
```

```

-----
MAC address information:
  Public base address    00:1f:12:c3:58:00
  Public count           2032
  Private base address   00:1f:12:c3:5f:f0
  Private count          16

```

```
lcc3-re0:
```

```

-----
MAC address information:
  Public base address    00:21:59:ef:b8:00
  Public count           2032
  Private base address   00:21:59:ef:bf:f0
  Private count          16

```

**show chassis  
mac-addresses  
(QFX3500 Switches)**

```

user@switch> show chassis mac-addresses
MAC address information:
Public base address 02:00:08:00:00:00
Public count 512
Private base address 02:00:00:00:00:00
Private count 64

```

**show chassis  
mac-addresses  
interconnect-device  
(QFabric Systems)**

```

user@switch> show chassis mac-addresses interconnect-device interconnect1
MAC address information:
  Public base address    00:1f:12:30:9c:c0
  Public count           58
  Private base address   00:1f:12:30:9c:fa
  Private count          6

```

**show chassis  
mac-addresses**

```

user@switch> show chassis mac-addresses node-group NW-NG-0
MAC address information:
-----

```



node-group (QFabric  
Systems)

```
RE:
  FC MAC base    00:11:00:00:00:00
  FC MAC count   2
  VLAN MAC       00:11:00:00:00:09
EC6007
  Base address   00:00:01:76:00:00
  Count          64
EC6008
  Base address   00:22:83:22:52:ae
  Count          260
```

show chassis  
mac-addresses  
(ACX2000 Universal  
Access Router)

```
user@switch> show chassis mac-addresses
MAC address information:
  Public base address  84:18:88:c0:2b:00
  Public count         112
  Private base address 84:18:88:c0:2b:70
  Private count        16
```



## show chassis nonstop-upgrade node-group

<b>Syntax</b>	<b>show chassis nonstop-upgrade node-group <i>node-group-name</i></b>
<b>Release Information</b>	Command introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Display the status of the Node group after the most recent nonstop software upgrade (NSSU).
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Performing a Nonstop Software Upgrade on the QFabric System on page 80</a></li> <li>• <a href="#">request system software nonstop-upgrade on page 363</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show chassis nonstop-upgrade node-group on page 767</a>
<b>Output Fields</b>	<a href="#">Table 53 on page 767</a> lists the output fields for the <b>show chassis nonstop-upgrade node-group</b> command. Output fields are listed in the approximate order in which they appear.

**Table 53: show chassis nonstop-upgrade node-group Output Fields**

Field Name	Field Description
<b>Item</b>	Node device slot number.
<b>Status</b>	State of Node device: <ul style="list-style-type: none"> <li>• <b>Error</b>—Node device is in an error state.</li> <li>• <b>Offline</b>—Node device is powered down.</li> <li>• <b>Online</b>—Node device is online and running.</li> </ul>
<b>Reason</b>	Reason for the state (if the line card is offline).

## Sample Output

**show chassis  
nonstop-upgrade  
node-group**

```
user@qfabric> show chassis nonstop-upgrade node-group NW-NG-0
Item           Status      Reason
P1550-C       Online
```



## show chassis pic

<b>Syntax</b>	<code>show chassis pic fpc-slot <i>slot-number</i> pic-slot <i>slot-number</i></code>
<b>Syntax (TX Matrix and TX Matrix Plus Routers)</b>	<code>show chassis pic fpc-slot <i>slot-number</i> pic-slot <i>slot-number</i> &lt;fcc <i>number</i>&gt;</code>
<b>Syntax (MX Series Routers)</b>	<code>show chassis pic fpc-slot <i>slot-number</i> pic-slot <i>slot-number</i> &lt;all-members&gt; &lt;local&gt; &lt;member <i>member-id</i>&gt;</code>
<b>Syntax (MX2010 3D Universal Edge Routers)</b>	<code>show chassis pic fpc-slot <i>slot-number</i> pic-slot <i>slot-number</i></code>
<b>Syntax (MX2020 3D Universal Edge Routers)</b>	<code>show chassis pic fpc-slot <i>slot-number</i> pic-slot <i>slot-number</i></code>
<b>Syntax (QFX Series)</b>	<code>show chassis pic &lt;interconnect-device <i>name</i> (fpc-slot <i>slot-number</i>   pic-slot <i>slot-number</i>)&gt; &lt;node-device <i>name</i> pic-slot <i>slot-number</i>&gt;</code>
<b>Syntax (ACX Series Universal Access Routers)</b>	<code>show chassis pic fpc-slot <i>slot-number</i> pic-slot <i>slot-number</i></code>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.1 for QFX Series.</p> <p>Command introduced in Junos OS Release 12.2 for ACX Series Universal Access Routers.</p> <p>Command introduced in Junos OS Release 12.3 for MX2020 3D Universal Edge Routers.</p> <p>Command introduced in Junos OS Release 12.3 for MX2010 3D Universal Edge Routers.</p>
<b>Description</b>	Display status information about the PIC installed in the specified Flexible PIC Concentrator (FPC) and PIC slot.
<b>Options</b>	<p><b>fpc-slot <i>slot-number</i></b>—Display information about the PIC in this particular FPC slot:</p> <ul style="list-style-type: none"> <li>On a TX Matrix router, if you specify the number of the T640 router by using the <b>fcc <i>number</i></b> option (the recommended method), replace <b><i>slot-number</i></b> with a value from 0 through 7. Otherwise, replace <b><i>slot-number</i></b> with a value from 0 through 31.</li> </ul> <p>Likewise, on a TX Matrix Plus router, if you specify the number of the T1600 router by using the <b>fcc <i>number</i></b> option (the recommended method), replace <b><i>slot-number</i></b> with a value from 0 through 7. Otherwise, replace <b><i>slot-number</i></b> with a value from 0 through 31. For example, the following commands have the same result:</p> <pre> user@host&gt; show chassis pic fpc-slot 1 fcc 1 pic-slot 1 user@host&gt; show chassis pic fpc-slot 9 pic-slot 1 </pre>



- M120 routers only—Replace **slot-number** with a value from 0 through 5.
- MX80 routers only—Replace **slot-number** with a value from 0 through 1.
- MX240 routers only—Replace **slot-number** with a value from 0 through 2.
- MX480 routers only—Replace **slot-number** with a value from 0 through 5.
- MX960 routers only—Replace **slot-number** with a value from 0 through 11.
- MX2020 routers only—Replace **slot-number** with a value from 0 through 19.
- Other routers—Replace **slot-number** with a value from 0 through 7.
- EX Series switches:
  - EX3200 switches and EX4200 standalone switches—Replace **slot-number** with 0.
  - EX4200 switches in a Virtual Chassis configuration—Replace **slot-number** with a value from 0 through 9 (switch's member ID).
  - EX8208 switches—Replace **slot-number** with a value from 0 through 7 (line card).
  - EX8216 switches—Replace **slot-number** with a value from 0 through 15 (line card).
- QFX Series:
  - QFX3500 switches—Replace **slot-number** with 0. In the command output, FPC refers to a line card. The FPC number equals the slot number for the line card.
  - QFabric systems—Replace **slot-number** with any number between 0 and 15. In the command output, FPC refers to a line card. The FPC number equals the slot number for the line card.

**all-members**—(MX Series routers only) (Optional) Display PIC information for all member routers in the Virtual Chassis configuration.

**interconnect-device name**—(QFabric systems only) (Optional) Display PIC information for a specified Interconnect device.

**lcc number**—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display PIC information for a specified T640 router (or line-card chassis) that is connected to the TX Matrix router. On a TX Matrix Plus router, display PIC information for a specified T1600 router (or line-card chassis) that is connected to the TX Matrix Plus router. Replace **number** with a value from 0 through 3.

**local**—(MX Series routers only) (Optional) Display PIC information for the local Virtual Chassis member.

**member member-id**—(MX Series routers only) (Optional) Display PIC information for the specified member of the Virtual Chassis configuration. Replace **member-id** with a value of 0 or 1.



**node-device *name***—(QFabric systems only) (Optional) Display PIC information for a specified Node device.

**pic-slot *slot-number***—Display information about the PIC in this particular PIC slot. For routers, replace ***slot-number*** with a value from 0 through 3. For EX3200 and EX4200 switches, replace ***slot-number*** with 0 for built-in network interfaces and 1 for interfaces on uplink modules. For EX8208 and EX8216 switches, replace ***slot-number*** with 0. For the QFX3500 standalone switch and the QFabric system, replace ***slot-number*** with 0 or 1.

**Required Privilege Level**

view

**Related Documentation**

- request chassis pic
- [show chassis hardware on page 628](#)
- Configuring the PIC Type
- 100-Gigabit Ethernet PIC Overview

**List of Sample Output**

[show chassis pic fpc-slot pic-slot on page 773](#)  
[show chassis pic fpc-slot pic-slot \(PIC Offline\) on page 773](#)  
[show chassis pic fpc-slot pic-slot \(FPC Offline\) on page 773](#)  
[show chassis pic fpc-slot pic-slot \(FPC Not Present\) on page 773](#)  
[show chassis pic fpc-slot pic-slot \(PIC Not Present\) on page 773](#)  
[show chassis pic fpc-slot 3 pic-slot 0 \(M120 Router\) on page 773](#)  
[show chassis pic fpc-slot pic-slot \(MX960 Router Bidirectional Optics\) on page 773](#)  
[show chassis pic fpc-slot pic-slot \(MX480 Router with 100-Gigabit Ethernet MIC\) on page 774](#)  
[show chassis pic fpc-slot pic-slot \(MX240, MX480, MX960 Routers with Application Services Modular Line Card\) on page 774](#)  
[show chassis pic fpc-slot pic-slot \(MX2010 Router\) on page 775](#)  
[show chassis pic fpc-slot pic-slot \(MX2020 Router\) on page 775](#)  
[show chassis pic fpc-slot pic-slot \(T1600 Router with 100-Gigabit Ethernet PIC\) on page 775](#)  
[show chassis pic fpc-slot pic-slot lcc \(TX Matrix Router\) on page 775](#)  
[show chassis pic fpc-slot pic-slot lcc \(TX Matrix Plus Router\) on page 775](#)  
[show chassis pic fpc-slot pic-slot \(Next-Generation SONET/SDH SFP\) on page 776](#)  
[show chassis pic fpc-slot pic-slot \(12-Port T1/E1\) on page 776](#)  
[show chassis pic fpc-slot 0 pic-slot 1 \(4x CHOC3 SONET CE SFP\) on page 776](#)  
[show chassis pic fpc-slot 0 pic-slot 0 \(SONET/SDH OC3/STM1 \[Multi-Rate\] MIC with SFP\) on page 777](#)  
[show chassis pic fpc-slot 3 pic-slot 0 \(8-port Channelized SONET/SDH OC3/STM1 \[Multi-Rate\] MIC with SFP\) on page 777](#)  
[show chassis pic fpc-slot 5 pic-slot 0 \(4-port Channelized SONET/SDH OC3/STM1 \[Multi-Rate\] MIC with SFP\) on page 777](#)  
[show chassis pic fpc-slot 1 pic-slot 0 \(1-port OC192/STM64 MIC with XFP\) on page 778](#)  
[show chassis pic fpc-slot 1 pic-slot 2 \(8-port DS3/E3 MIC\) on page 778](#)  
[show chassis pic fpc-slot pic-slot \(OTN\) on page 778](#)



[show chassis pic fpc-slot pic-slot \(QFX3500 Switch\) on page 778](#)  
[show chassis pic interconnect-device fpc-slot pic-slot \(QFabric Systems\) on page 778](#)  
[show chassis pic node-device fpc-slot pic-slot \(QFabric System\) on page 778](#)  
[show chassis pic fpc-slot 0 pic-slot 1 \(ACX2000 Universal Access Router\) on page 779](#)  
[show chassis pic FPC-slot 1 PIC-slot 0 \(MX Routers with Media Services Blade \[MSB\]\) on page 780](#)  
[show chassis pic FPC slot 1, PIC slot 2 \(MX Routers with Media Services Blade \[MSB\]\) on page 780](#)

**Output Fields** Table 54 on page 771 lists the output fields for the **show chassis pic** command. Output fields are listed in the approximate order in which they appear.

**Table 54: show chassis pic Output Fields**

Field Name	Field Description
Type	PIC type.  <b>NOTE:</b> On the 1-port OC192/STM64 MICs with the SDH framing mode, the type is displayed as <b>MIC-3D-1STM64-XFP</b> and with the SONET framing mode, the type is displayed as <b>MIC-3D-1OC192-XFP</b> . By default, the 1-port OC192/STM64 MICs displays the type as <b>MIC-3D-1OC192-XFP</b> .
ASIC type	Type of ASIC on the PIC.
State	Status of the PIC. State is displayed only when a PIC is in the slot. <ul style="list-style-type: none"> <li>• <b>Online</b>— PIC is online and running.</li> <li>• <b>Offline</b>—PIC is powered down.</li> </ul>
PIC version	PIC hardware version.
Uptime	How long the PIC has been online.
Package	(Multiservices PICs only) Services package supported: <b>Layer-2</b> or <b>Layer-3</b> .
Port Number	Port number for the PIC.
Cable Type	Type of cable connected to the port: <b>LH</b> , <b>LX</b> , or <b>SX</b> .
PIC Port Information (MX480 Router 100-Gigabit Ethernet CFP)	Port-level information for the PIC. <ul style="list-style-type: none"> <li>• Port—Port number</li> <li>• Cable type—Type of optical transceiver installed.</li> <li>• Fiber type—Type of fiber. SM is single-mode.</li> <li>• Xcvr vendor—Transceiver vendor name.</li> <li>• Xcvr vendor part number—Transceiver vendor part number.</li> <li>• Wavelength—Wavelength of the transmitted signal. Uplinks and downlinks are always 1550 nm. There is a separate fiber for each direction</li> </ul>



Table 54: show chassis pic Output Fields (*continued*)

Field Name	Field Description
<b>PIC Port Information (MX960 Router Bidirectional Optics )</b>	<p>Port-level information for the PIC.</p> <ul style="list-style-type: none"> <li>• Port—Port number</li> <li>• Cable type—Type of small form-factor pluggable (SFP) optical transceiver installed. Uplink interfaces display -U. Down link interfaces display -D.</li> <li>• Fiber type—Type of fiber. SM is single-mode.</li> <li>• Xcvr vendor—Transceiver vendor name.</li> <li>• Xcvr vendor part number—Transceiver vendor part number. <ul style="list-style-type: none"> <li>• BX10-10-km bidirectional optics.</li> <li>• BX40-40-km bidirectional optics.</li> <li>• SFP-LX-40-km SFP optics.</li> </ul> </li> <li>• Wavelength—Wavelength of the transmitted signal. Uplinks are always 1310 nm. Downlinks are either 1490 nm or 1550 nm.</li> </ul>
<b>PIC Port Information (Next-Generation SONET/SDH SFP)</b>	<p>Port-level information for the next-generation SONET/SDH SFP PIC.</p> <ul style="list-style-type: none"> <li>• Port—Port number.</li> <li>• Cable type—Type of small form-factor pluggable (SFP) optical transceiver installed.</li> <li>• Fiber type—Type of fiber: <b>SM</b> (single-mode) or <b>MM</b> (multimode).</li> <li>• Xcvr vendor—Transceiver vendor name.</li> <li>• Xcvr vendor part number—Transceiver vendor part number.</li> <li>• Wavelength—Wavelength of the transmitted signal. Next-generation SONET/SDH SFPs use 1310 nm.</li> </ul>
<b>Multirate Mode</b>	Rate-selectability status for the MIC: <b>Enabled</b> or <b>Disabled</b> .
<b>Channelization</b>	Indicates whether channelization is enabled or disabled on the DS3/E3 MIC.



## Sample Output

**show chassis pic  
fpc-slot pic-slot**

```
user@host> show chassis pic fpc-slot 2 pic-slot 0
PIC fpc slot 2 pic slot 0 information:
  Type                               10x 1GE(LAN), 1000 BASE
  ASIC type                           H chip
  State                               Online
  PIC version                          1.1
  Uptime                              1 day, 50 minutes, 58 seconds
PIC Port Information:
  Port      Cable      Xcvr      Xcvr Vendor
  Number    Type        Vendor Name  Part Number
  0          GIGE 1000EX  FINISAR CORP.  FTRJ8519P1BNL-J3
  1          GIGE 1000EX  FINISAR CORP.  FTRJ-8519-7D-JUN
```

**show chassis pic  
fpc-slot pic-slot  
(PIC Offline)**

```
user@host> show chassis pic fpc-slot 1 pic-slot 0
PIC fpc slot 1 pic slot 0 information:
  State                               Offline
```

**show chassis pic  
fpc-slot pic-slot  
(FPC Offline)**

```
user@host> show chassis pic fpc-slot 1 pic-slot 0
FPC 1 is not online
```

**show chassis pic  
fpc-slot pic-slot  
(FPC Not Present)**

```
user@host> show chassis pic fpc-slot 4 pic-slot 0
FPC slot 4 is empty
```

**show chassis pic  
fpc-slot pic-slot  
(PIC Not Present)**

```
user@host> show chassis pic fpc-slot 5 pic-slot 2
FPC 5, PIC 2 is empty
```

**show chassis pic  
fpc-slot 3 pic-slot 0  
(M120 Router)**

```
user@host> show chassis pic fpc-slot 3 pic-slot 0
PC slot 3, PIC slot 0 information:
  Type                               2x G/E IQ, 1000 BASE
  ASIC type                           IQ GE 2 VLAN-TAG FPGA
  State                               Online
  PIC version                          1.16
  Uptime                              3 hours, 3 minutes
PIC Port Information:
  Port      Cable      Xcvr      Xcvr Vendor
  Number    Type        Vendor Name  Part Number
  0          GIGE 1000SX  FINISAR CORP.  FTRJ8519P1BNL-J3
  1          GIGE 1000SX  FINISAR CORP.  FTRJ-8519-7D-JUN
```

**show chassis pic  
fpc-slot pic-slot**

```
user@host> show chassis pic fpc-slot 4 pic-slot 1
FPC slot 4, PIC slot 1 information:
  Type                               10x 1GE(LAN)
```



**(MX960 Router  
Bidirectional Optics)**

```

State                               Online
PIC version                         0.0
Uptime                             18 days, 5 hours, 41 minutes, 54 seconds

```

## PIC port information:

Port	Cable type	Fiber type	Xcvr vendor	Xcvr vendor part number	Wavelength
0	SFP-1000BASE-BX10-D	SM	SumitomoElectric	SBP6H44-J3-BW-49	1490 nm
1	SFP-1000BASE-BX10-D	SM	SumitomoElectric	SBP6H44-J3-BW-49	1490 nm
2	SFP-1000BASE-BX10-D	SM	SumitomoElectric	SBP6H44-J3-BW-49	1490 nm
3	SFP-1000BASE-BX10-D	SM	OCF	TRXBG1LXDBVM2-JW	1490 nm
4	SFP-1000BASE-BX10-D	SM	OCF	TRXBG1LXDBVM2-JW	1490 nm
5	SFP-1000BASE-BX10-U	SM	SumitomoElectric	SBP6H44-J3-BW-31	1310 nm
6	SFP-1000BASE-BX10-U	SM	SumitomoElectric	SBP6H44-J3-BW-31	1310 nm
7	SFP-1000BASE-BX10-U	SM	OCF	TRXBG1LXDBBMH-J1	1310 nm
8	SFP-1000BASE-BX10-U	SM	OCF	TRXBG1LXDBBMH-J1	1310 nm
9	SFP-1000BASE-BX10-U	SM	SumitomoElectric	SBP6H44-J3-BW-31	1310 nm

**show chassis pic  
fpc-slot pic-slot  
(MX480 Router with  
100-Gigabit Ethernet  
MIC)**

```

user@host> show chassis pic fpc-slot 1 pic-slot 2
FPC slot 1, PIC slot 2 information:
Type                               1X100GE CFP
State                              Online
PIC version                         2.10
Uptime                             4 minutes, 48 seconds

```

## PIC port information:

Port	Cable type	Fiber type	Xcvr vendor	Xcvr vendor part number	Wavelength
0	100GBASE LR4	SM	FINISAR CORP.	FTLC1181RDN3-J3	1310 nm

Xcvr vendor  
firmware version  
1.8

**show chassis pic  
fpc-slot pic-slot  
(MX240, MX480,  
MX960 Routers with**

```

user@host>show chassis pic fpc-slot 1 pic-slot 2
FPC slot 1, PIC slot 2 information:
Type                               AS-MXC
State                              Online
PIC version                         1.0
Uptime                             11 hours, 18 minutes, 3 seconds

```



## Application Services Modular Line Card)

**show chassis pic  
fpc-slot pic-slot  
(MX2010 Router)**

```
user@host>show chassis pic fpc-slot 9 pic-slot 3
FPC slot 9, PIC slot 3 information:
  Type          1X100GE CFP
  State          Online
  PIC version    0.0
  Uptime        14 hours, 51 seconds
```

**show chassis pic  
fpc-slot pic-slot  
(MX2020 Router)**

```
user@host>show chassis pic fpc-slot 19 pic-slot 3
FPC slot 19, PIC slot 3 information:
  Type          4x 10GE(LAN) SFP+
  State          Online
  PIC version    0.0
  Uptime        1 day, 11 hours, 26 minutes, 36 seconds
```

PIC port information:

			Fiber		Xcvr vendor	Wave-	Xcvr
Port	Cable type		type	Xcvr vendor	part number	length	
0	10GBASE SR	MM	SumitomoElectric	SPP5200SR-J6-M	850 nm	0.0	
1	10GBASE SR	MM	SumitomoElectric	SPP5200SR-J6-M	850 nm	0.0	
2	10GBASE SR	MM	SumitomoElectric	SPP5200SR-J6-M	850 nm	0.0	
3	10GBASE SR	MM	SumitomoElectric	SPP5200SR-J6-M	850 nm	0.0	

**show chassis pic  
fpc-slot pic-slot  
(T1600 Router with  
100-Gigabit Ethernet  
PIC)**

```
user@host> run show chassis pic fpc-slot 3 pic-slot 1
FPC slot 3, PIC slot 1 information:
  Type          100GE SLOT1
  ASIC type      Brooklyn 100GE FPGA
  State          Online
  PIC version    1.3
  Uptime        10 minutes, 44 seconds
```

PIC port information:

Port	Cable type	Fiber type	Xcvr vendor	Xcvr vendor part number	Wavelength
0	100GBASE LR4	SM	Opnext Inc.	TRC5E20ENFSF000F	1310 nm

**show chassis pic  
fpc-slot pic-slot lcc  
(TX Matrix Router)**

```
user@host> show chassis pic fpc-slot 1 pic-slot 1 lcc 0
lcc0-re0:
```

PIC fpc slot 1 pic slot 1 information:

```
  Type          4x OC-3 SONET, SMIR
  ASIC type      D chip
  State          Online
  PIC version    1.2
  Uptime        5 days, 2 hours, 12 minutes, 8 seconds
```

**show chassis pic  
fpc-slot pic-slot lcc**

```
user@host> show chassis pic pic-slot 0 fpc-slot 8
lcc0-re0:
```



**(TX Matrix Plus Router)**

FPC slot 8, PIC slot 0 information:

```

Type          1x 10GE(LAN/WAN)
State         Online
Uptime        2 hours, 46 minutes, 23 seconds

```

PIC port information:

Port	Cable type	Fiber type	Xcvr vendor	part number	Wavelength
0	10GBASE ZR	SM	Opnext Inc.	TRF7061BN-LF150	1550 nm
0	10GBASE ZR	SM	FINISAR CORP.	FTRX-1811-3-J2	1550 nm

**show chassis pic fpc-slot pic-slot (Next-Generation SONET/SDH SFP)**

user@host&gt; show chassis pic fpc-slot 4 pic-slot 0

FPC slot 4, PIC slot 0 information:

```

Type          4x OC-3 1x OC-12 SFP
ASIC type     D FPGA
State         Online
PIC version   1.3
Uptime        1 day, 50 minutes, 4 seconds

```

PIC port information:

Port	Cable type	Fiber type	Xcvr vendor	Xcvr vendor part number	Wavelength
0	OC48 short reach	SM	FINISAR CORP.	FTRJ1321P1BTL-J2	1310 nm
1	OC3 short reach	MM	OCP	TRPA03MM3BAS-JE	1310 nm
2	OC3 short reach	MM	OCP	TRXA03MM3BAS-JW	1310 nm
3	OC12 inter reach	SM	FINISAR CORP.	FTLF1322P1BTR	1310 nm

**show chassis pic fpc-slot pic-slot (12-Port T1/E1)**

user@host&gt; show chassis pic fpc-slot 0 pic-slot 3

FPC slot 0, PIC slot 3 information:

```

Type          12x T1/E1 CE
State         Online
PIC version   1.1
CPU load average 1 percent
Interrupt load average 0 percent
Total DRAM size 128 MB
Memory buffer utilization 100 percent
Memory heap utilization 4 percent
Uptime        1 day, 22 hours, 28 minutes, 12 seconds
Internal Clock Synchronization Normal

```

**show chassis pic fpc-slot 0 pic-slot 1 (4x**

user@host&gt; show chassis pic fpc-slot 0 pic-slot 1

FPC slot 0, PIC slot 1 information:

```

Type          4x CHOC3 SONET CE SFP

```



**CHOC3 SONET CE SFP)**

```

State                               Online
PIC version                         1.3
CPU load average                     1 percent
Interrupt load average               0 percent
Total DRAM size                     128 MB
Memory buffer utilization            99 percent
Memory heap utilization              4 percent
Uptime                             1 day, 22 hours, 55 minutes, 37 seconds
Internal Clock Synchronization      Normal

```

**PIC port information:**

Port	Cable type	Fiber type	Xcvr vendor	Xcvr vendor part number	Wavelength
0	OC3 short reach	MM	AVAGO	HFBR-57E0P-JU2	n/a
1	OC3 short reach	MM	AVAGO	HFBR-57E0P-JU2	n/a
3	OC3 long reach	SM	OPNEXT INC	TRF5456AVLB314	1310 nm

**show chassis pic fpc-slot 0 pic-slot 0 (SONET/SDH OC3/STM1 [Multi-Rate] MIC with SFP)**

```

user@host> show chassis pic fpc-slot 0 pic-slot 0
FPC slot 0, PIC slot 0 information:
Type                               MIC-3D-80C30C12-40C48
State                               Online
PIC version                         1.8
Uptime                             3 days, 22 hours, 3 minutes, 50 seconds

```

**PIC port information:**

Port	Cable type	Fiber type	Xcvr vendor	Xcvr vendor part number	Wavelength
1	OC12 inter reach	SM	FINISAR CORP	FTRJ1322P1BTR-J3	1310 nm
7	OC12 inter reach	SM	FINISAR CORP	FTRJ1322P1BTR-J3	1310 nm

Multirate Mode Enabled

**show chassis pic fpc-slot 3 pic-slot 0 (8-port Channelized SONET/SDH OC3/STM1 [Multi-Rate] MIC with SFP)**

```

user@host> show chassis pic fpc-slot 3 pic-slot 0
FPC slot 3, PIC slot 0 information:
Type                               MIC-3D-8CHOC3-4CHOC12
State                               Online
PIC version                         1.9
Uptime                             1 hour, 21 minutes, 24 seconds

```

**PIC port information:**

Port	Cable type	Fiber type	Xcvr vendor	Xcvr vendor part number	Wavelength
0	OC12 short reach	SM	FINISAR CORP.	FTRJ1322P1BTR-J3	1310 nm
1	OC12 short reach	SM	FINISAR CORP.	FTRJ1322P1BTR-J3	1310 nm
2	OC12 inter reach	SM	FINISAR CORP.	FTRJ1322P1BTR-J2	1310 nm
4	OC12 short reach	SM	FINISAR CORP.	FTRJ1322P1BTR-J3	1310 nm
5	OC12 short reach	SM	FINISAR CORP.	FTRJ1322P1BTR-J3	1310 nm
6	OC12 short reach	SM	FINISAR CORP.	FTRJ1322P1BTR-J3	1310 nm
7	OC12 short reach	SM	FINISAR CORP.	FTRJ1322P1BTR-J3	1310 nm

**show chassis pic fpc-slot 5 pic-slot 0 (4-port Channelized SONET/SDH OC3/STM1**

```

user@host> show chassis pic fpc-slot 5 pic-slot 0
FPC slot 5, PIC slot 0 information:
Type                               MIC-3D-4CHOC3-2CHOC12
State                               Online
PIC version                         1.9
Uptime                             1 hour, 21 minutes

```



**[Multi-Rate] MIC with SFP)**

PIC port information:

Port	Cable type	Fiber type	Xcvr vendor	Xcvr vendor part number	Wavelength
1	OC12 inter reach	SM	FINISAR CORP.	FTRJ1322P1BTR-J3	1310 nm
2	OC12 inter reach	SM	FINISAR CORP.	FTRJ1322P1BTR-J3	1310 nm
3	OC12 short reach	SM	FINISAR CORP.	FTRJ1322P1BTR-J3	1310 nm

**show chassis pic fpc-slot 1 pic-slot 0 (1-port OC192/STM64 MIC with XFP)**

user@host&gt; show chassis pic fpc-slot 1 pic-slot 0

FPC slot 1, PIC slot 0 information:

Type	MIC-3D-10C192-XFP
State	Online
PIC version	1.2
Uptime	1 day, 11 hours, 4 minutes, 6 seconds

PIC port information:

Port	Cable type	Fiber type	Xcvr vendor	Xcvr vendor part number	Wavelength
0	OC192 short reach	n/a	FINISAR CORP.	FTLX1412M3BCL-J3	1310 nm

**show chassis pic fpc-slot 1 pic-slot 2 (8-port DS3/E3 MIC)**

user@host&gt; show chassis pic fpc-slot 1 pic-slot 2

FPC slot 1, PIC slot 2 information:

Type	MIC-3D-8DS3-E3
State	Online
PIC version	1.10
Uptime	4 days, 1 hour, 29 minutes, 19 seconds
Channelization Mode	Disabled

**show chassis pic fpc-slot pic-slot (OTN)**

user@host&gt; show chassis pic fpc-slot 5 pic-slot 0

PIC fpc slot 5 pic slot 0 information:

Type	1x10GE(LAN),OTN
ASIC type	H chip
State	Online
PIC version	1.0
Uptime	5 minutes, 50 seconds

**show chassis pic fpc-slot pic-slot (QFX3500 Switch)**

user@switch&gt; show chassis pic fpc-slot 0 pic-slot 0

FPC slot 0, PIC slot 0 information:

Type	48x 10G-SFP+ Builtin
State	Online
Uptime	3 days, 3 hours, 5 minutes, 20 seconds

**show chassis pic interconnect-device fpc-slot pic-slot (QFabric Systems)**

user@switch&gt; show chassis pic interconnect-device interconnect1 fpc-slot 9 pic-slot 0

FPC slot 9, PIC slot 0 information:

Type	16x 40G-GE Builtin
State	Online
Uptime	2 hours, 47 minutes, 40 seconds

**show chassis pic node-device fpc-slot**

user@switch&gt; show chassis pic node-device node1 pic-slot 0

FPC slot node1, PIC slot 0 information:

Type	48x 10G-SFP+ Builtin
------	----------------------



pic-slot (QFabric  
System)

State  
Uptime

Online  
2 hours, 52 minutes, 37 seconds

PIC port information:

Port	Cable type	Fiber type	Xcvr vendor	Xcvr vendor part number	Wavelength
0	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
1	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
2	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
3	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
4	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
5	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
6	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
7	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
8	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
9	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
10	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
11	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
12	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
13	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
14	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
15	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
16	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
17	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
18	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
19	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
20	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
21	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
22	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
23	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
24	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
25	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
26	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
27	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
28	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
29	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
30	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
31	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
32	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
33	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
34	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
35	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
36	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
37	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
38	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
39	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
40	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
41	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
42	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
43	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
44	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
45	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
46	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm
47	10GBASE SR	MM	SumitomoElectric	SPP5101SR-J3	850 nm

show chassis pic  
fpc-slot 0 pic-slot 1

user@host> show chassis pic fpc-slot 0 pic-slot 1

FPC slot 0, PIC slot 1 information:

Type 8x 1GE(LAN) RJ45 Built-in



(ACX2000 Universal Access Router)	State	Online
	Uptime	6 days, 2 hours, 51 minutes, 11 seconds

show chassis pic FPC-slot 1 PIC-slot 0 (MX Routers with Media Services Blade [MSB])	user@switch> show chassis pic fpc-slot 1 pic-slot 0
	FPC slot 1, PIC slot 0 information:
	Type AS-MSC
	State Online
	PIC version 1.6
	Uptime 11 hours, 17 minutes, 56 seconds

show chassis pic FPC slot 1, PIC slot 2 (MX Routers with Media Services Blade [MSB])	user@switch> show chassis pic fpc-slot 1 pic-slot 2
	Type AS-MXC
	State Online
	PIC version 1.0
	Uptime 11 hours, 18 minutes, 3 seconds



## show chassis routing-engine

<b>Syntax</b>	show chassis routing-engine <bios   <i>slot</i> >
<b>Syntax (EX Series Switches)</b>	show chassis routing-engine < <i>slot</i> >
<b>Syntax (T Series routers)</b>	show chassis routing-engine <bios   <i>slot</i> >
<b>Syntax (TX Matrix Routers)</b>	show chassis routing-engine <bios   <i>slot</i> > <lcc <i>number</i>   scc>
<b>Syntax (TX Matrix Plus Routers)</b>	show chassis routing-engine <bios   <i>slot</i> > <lcc <i>number</i>   sfc <i>number</i> >
<b>Syntax (QFX Series)</b>	show chassis routing-engine <interconnect-device <i>name</i> > <node-device <i>name</i> >
<b>Syntax (MX Series Routers)</b>	show chassis routing-engine <bios   <i>slot</i> > <all-members> <local> <member <i>member-id</i> >
<b>Syntax (MX2010 3D Universal Edge Routers)</b>	show chassis routing-engine <bios   <i>slot</i> >
<b>Syntax (MX2020 3D Universal Edge Routers)</b>	show chassis routing-engine <bios   <i>slot</i> >
<b>Syntax (ACX Series Universal Access Routers)</b>	show chassis routing-engine
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release in 9.6.</p> <p>Command introduced in Junos OS Release 11.1 for QFX Series.</p> <p>Command introduced in Junos OS Release 12.2 for ACX Series Universal Access Routers.</p> <p>Command introduced in Junos OS Release 12.3 for MX2020 3D Universal Edge Routers.</p> <p>Command introduced in Junos OS Release 12.3 for MX2010 3D Universal Edge Routers.</p>
<b>Description</b>	Display the status of the Routing Engine.



**Options** **none**—Display information about one or more Routing Engines. On a TX Matrix router, display information about all Routing Engines on the TX Matrix router and its attached T640 routers. On a TX Matrix Plus router, display information about all Routing Engines on the TX Matrix Plus router and its attached T1600 routers.

**all-members**—(MX Series routers only) (Optional) Display Routing Engine information for all members of the Virtual Chassis configuration.

**bios**—(Optional) Display the (BIOS) firmware version.

**interconnect-device *number***—(QFabric systems only) (Optional) Display Routing Engine information for a specified Interconnect device.

**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display Routing Engine information for a specified T640 router (or line-card chassis) that is connected to the TX Matrix router. On a TX Matrix Plus router, display Routing Engine information for a specified T1600 router (or line-card chassis) that is connected to the TX Matrix Plus router. Replace ***number*** with a value from **0** through **3**.

**local**—(MX Series routers only) (Optional) Display Routing Engine information for the local Virtual Chassis member.

**member *member-id***—(MX Series routers only) (Optional) Display Routing Engine information for the specified member of the Virtual Chassis configuration. For an MX Series Virtual Chassis, replace ***member-id*** with a value of **0** or **1**.

**node-device *number***—(QFabric systems only) (Optional) Display Routing Engine information for a specified Node device.

**scc**—(TX Matrix routers only) (Optional) Display Routing Engine information for the TX Matrix router (or switch-card chassis).

**sfc *number***—(TX Matrix Plus routers only) (Optional) Display Routing Engine information for the TX Matrix Plus router (or switch-fabric chassis). Replace ***number*** with **0**.

**slot**—(Systems with multiple Routing Engines) (Optional) Display information for an individual Routing Engine. Replace ***slot*** with **0** or **1**. For QFX3500 switches, there is only one Routing Engine, so you do not need to specify the slot number.

**Required Privilege Level**

view

**Related Documentation**

- [request chassis routing-engine master on page 324](#)
- Configuring Routing Engine Redundancy
- Switching the Global Master and Backup Roles in a Virtual Chassis Configuration

**List of Sample Output**

[show chassis routing-engine \(M5 Router\) on page 786](#)  
[show chassis routing-engine \(M10 Router\) on page 786](#)  
[show chassis routing-engine \(M20 Router\) on page 786](#)



[show chassis routing-engine \(M40 Router\) on page 787](#)  
[show chassis routing-engine \(M120 Router\) on page 787](#)  
[show chassis routing-engine \(M160 Router\) on page 788](#)  
[show chassis routing-engine \(MX240 Router\) on page 789](#)  
[show chassis routing-engine \(MX480 Router\) on page 789](#)  
[show chassis routing-engine \(MX960 Router\) on page 789](#)  
[show chassis routing-engine \(MX2010 Router\) on page 790](#)  
[show chassis routing-engine \(MX2020 Router\) on page 790](#)  
[show chassis routing-engine \(T320 router\) on page 791](#)  
[show chassis routing-engine \(T640 router\) on page 792](#)  
[show chassis routing-engine \(T1600 router\) on page 792](#)  
[show chassis routing-engine \(T4000 router\) on page 793](#)  
[show chassis routing-engine \(TX Matrix Router\) on page 794](#)  
[show chassis routing-engine lcc \(TX Matrix Router\) on page 795](#)  
[show chassis routing-engine bios \(TX Matrix Router\) on page 795](#)  
[show chassis routing-engine \(TX Matrix Plus Router\) on page 796](#)  
[show chassis routing-engine lcc \(TX Matrix Plus Router\) on page 797](#)  
[show chassis routing-engine bios \(TX Matrix Plus Router\) on page 798](#)  
[show chassis routing-engine \(QFX Series\) on page 798](#)  
[show chassis routing-engine \(PTX Series Packet Transport Switch\) on page 798](#)  
[show chassis routing-engine \(ACX2000 Universal Access Router\) on page 799](#)  
[show chassis routing-engine \(ACX1000 Universal Access Router\) on page 799](#)

**Output Fields** [Table 55 on page 783](#) lists the output fields for the **show chassis routing-engine** command. Output fields are listed in the approximate order in which they appear.

**Table 55: show chassis routing-engine Output Fields**

Field Name	Field Description
<b>Slot</b>	(Systems with single and multiple Routing Engines) Slot number.
<b>Current state</b>	(Systems with multiple Routing Engines) Current state of the Routing Engine: <b>Master</b> , <b>Backup</b> , or <b>Disabled</b> .
<b>Election priority</b>	(Systems with multiple Routing Engines) Election priority for the Routing Engine: <b>Master</b> or <b>Backup</b> .
<b>Temperature</b>	Temperature of the air flowing past the Routing Engine.
<b>CPU Temperature</b>	Temperature of the CPU.
<b>DRAM</b>	Total DRAM available to the Routing Engine's processor.
<b>Memory utilization</b>	Percentage of Routing Engine memory being used.



Table 55: show chassis routing-engine Output Fields (*continued*)

Field Name	Field Description
<b>CPU utilization</b>	Information about the Routing Engine's CPU utilization: <ul style="list-style-type: none"><li>• <b>User</b>—Percentage of CPU time being used by user processes.</li><li>• <b>Background</b>—Percentage of CPU time being used by background processes.</li><li>• <b>Kernel</b>—Percentage of CPU time being used by kernel processes.</li><li>• <b>Interrupt</b>—Percentage of CPU time being used by interrupts.</li><li>• <b>Idle</b>—Percentage of CPU time that is idle.</li></ul>
<b>Model</b>	Routing Engine model number.
<b>Serial ID</b>	(Systems with multiple Routing Engines) Identification number of the Routing Engine in this slot.
<b>Start time</b>	Time at which the Routing Engine started running.
<b>Uptime</b>	How long the Routing Engine has been running.
Routing Engine BIOS Version	BIOS version being run by the Routing Engine.



Table 55: show chassis routing-engine Output Fields (*continued*)

Field Name	Field Description
Last reboot reason	<p>Reason for last reboot, including:</p> <ul style="list-style-type: none"> <li>• <b>power cycle/failure</b>—Halt of the Routing Engine using the <b>halt</b> command, powering down using the power button on the chassis or any other method (such as removal of the control board or Routing Engine), and then powering back the Routing Engine. A halt of the operating system also occurs if you enter the <b>request system halt</b> command. You can enter this command to halt the system operations on the chassis or specific Routing Engines. To restart the software, press any key on the keyboard.</li> <li>• <b>watchdog</b>—Reboot due to a hardware watchdog. A watchdog is a hardware monitoring process that examines the health and performance of the router to enable the device to recover from failures. A watchdog checks for problems at certain intervals, and reboots the routing engine if a problem is encountered.</li> <li>• <b>reset-button reset</b>—(Not available on the J Series router or EX Series switch) Reboot due to pressing of the reset button on the Routing Engine.</li> <li>• <b>power-button hard power off</b>—Reboot due to pressing of the power button on the chassis. A powering down of the software also occurs if you enter the <b>request system power-off</b> command. You can enter this command to power down the chassis or specific Routing Engines; you can then restart the software.</li> <li>• <b>misc hardware reason</b>—Reboot due to miscellaneous hardware reasons.</li> <li>• <b>thermal shutdown</b>—Reboot due to the router or switch reaching a critical temperature at which point it is unsafe to continue operations.</li> <li>• <b>hard disk failure</b>—Reboot due to a hard disk or solid-state drive (SSD) failure.</li> <li>• <b>reset from debugger</b>—Reboot due to reset from the debugger.</li> <li>• <b>chassis control reset</b>—Restart the chassis process that manages PICs, FPCs, and other hardware components. The chassis control module that runs the Routing Engine performs management and monitoring functions, and it provides a single access point for operational and maintenance functions. A reset of the chassis management process occurs when you enter the <b>restart chassis-control</b> command.</li> <li>• <b>bios auto recovery reset</b>—Reboot due to a BIOS auto-recovery reset.</li> <li>• <b>could not be determined</b>—Reboot due to an undetermined reason.</li> <li>• <b>Router rebooted after a normal shutdown</b>—Reboot due to a normal shutdown. This reason is displayed if the Routing Engine is powered down by pushing and holding the online/offline button on the Routing Engine faceplate for 30 seconds, and then powered back. A reboot of the software also occurs if you enter the <b>request system reboot</b> command. You can enter this command to reboot the chassis or specific Routing Engines.</li> </ul>
Load averages	Routing Engine load averages for the last 1, 5, and 15 minutes.



## Sample Output

### show chassis routing-engine (M5 Router)

```
user@host> show chassis routing-engine
Routing Engine status:
  Temperature                25 degrees C / 77 degrees F
  DRAM                       768 MB
  Memory utilization          21 percent
  CPU utilization:
    User                      0 percent
    Background                0 percent
    Kernel                    0 percent
    Interrupt                 0 percent
    Idle                      100 percent
  Model                       RE-2.0
  Serial ID                   31000007349bf701
  Start time                  2003-12-04 09:42:17 PST
  Uptime                      26 days, 1 hour, 12 minutes, 27 seconds
  Last reboot reason          Router rebooted after a normal shutdown
  Load averages:             1 minute   5 minute   15 minute
                              0.00        0.01        0.00
```

### show chassis routing-engine (M10 Router)

```
user@host> show chassis routing-engine
Routing Engine status:
  Temperature                25 degrees C / 77 degrees F
  DRAM                       768 MB
  Memory utilization          21 percent
  CPU utilization:
    User                      0 percent
    Background                0 percent
    Kernel                    0 percent
    Interrupt                 0 percent
    Idle                      100 percent
  Model                       RE-2.0
  Serial ID                   31000007349bf701
  Start time                  2003-12-04 09:42:17 PST
  Uptime                      26 days, 1 hour, 12 minutes, 27 seconds
  Last reboot reason          Router rebooted after a normal shutdown
  Load averages:             1 minute   5 minute   15 minute
                              0.00        0.01        0.00
```

### show chassis routing-engine (M20 Router)

```
user@host> show chassis routing-engine
Routing Engine status:
  Slot 0:
    Current state              Master
    Election priority           Master (default)
    Temperature                29 degrees C / 84 degrees F
    DRAM                       768 MB
    Memory utilization          20 percent
    CPU utilization:
      User                      1 percent
      Background                0 percent
      Kernel                    2 percent
      Interrupt                 0 percent
      Idle                      97 percent
    Model                       RE-2.0
    Serial ID                   58000007348d9a01
    Start time                  2003-12-30 07:05:47 PST
    Uptime                      3 hours, 41 minutes, 14 seconds
```



```

Last reboot reason      Router rebooted after a normal shutdown
Load averages:          1 minute   5 minute   15 minute
                        0.00        0.02        0.00

Routing Engine status:
Slot 1:
  Current state          Backup
  Election priority      Backup (default)
  Temperature            29 degrees C / 84 degrees F
  DRAM                   768 MB
  Memory utilization     0 percent
  CPU utilization:
    User                 0 percent
    Background           0 percent
    Kernel               1 percent
    Interrupt            0 percent
    Idle                 99 percent
  Model                  RE-2.0
  Serial ID              d800000734745701
  Start time             2003-06-17 16:37:33 PDT
  Uptime                 195 days, 18 hours, 47 minutes, 9 seconds
  Last reboot reason     Router rebooted after a normal shutdown

```

#### show chassis routing-engine (M40 Router)

```

user@host> show chassis routing-engine
Routing Engine status:
  Temperature            25 degrees C / 77 degrees F
  DRAM                   768 MB
  Memory utilization     21 percent
  CPU utilization:
    User                 0 percent
    Background           0 percent
    Kernel               0 percent
    Interrupt            0 percent
    Idle                 100 percent
  Model                  RE-2.0
  Serial ID              31000007349bf701
  Start time             2003-12-04 09:42:17 PST
  Uptime                 26 days, 1 hour, 12 minutes, 27 seconds
  Last reboot reason     Router rebooted after a normal shutdown
  Load averages:        1 minute   5 minute   15 minute
                        0.00        0.01        0.00

```

#### show chassis routing-engine (M120 Router)

```

user@host> show chassis routing-engine
Routing Engine status:
Slot 0:
  Current state          Master
  Election priority      Master (default)
  Temperature            46 degrees C / 114 degrees F
  CPU temperature        44 degrees C / 111 degrees F
  DRAM                   2048 MB
  Memory utilization     18 percent
  CPU utilization:
    User                 0 percent
    Background           0 percent
    Kernel               5 percent
    Interrupt            0 percent
    Idle                 95 percent
  Model                  RE-A-1000
  Serial ID              1000621154
  Start time             2006-10-31 17:10:05 PST
  Uptime                 14 minutes, 31 seconds

```



```

Last reboot reason      Router rebooted after a normal shutdown
Load averages:         1 minute   5 minute   15 minute
                        0.02       0.07       0.07

Routing Engine status:
Slot 1:
  Current state          Backup
  Election priority      Backup (default)
  Temperature            45 degrees C / 113 degrees F
  CPU temperature        42 degrees C / 107 degrees F
  DRAM                   2048 MB
  Memory utilization     15 percent
  CPU utilization:
    User                 0 percent
    Background           0 percent
    Kernel               0 percent
    Interrupt            0 percent
    Idle                 100 percent
  Model                  RE-A-1000
  Serial ID              1000621151
  Start time             2006-10-31 17:10:04 PST
  Uptime                 14 minutes, 30 seconds
  Last reboot reason     Router rebooted after a normal shutdown

```

#### show chassis routing-engine (M160 Router)

```

user@host> show chassis routing-engine
Routing Engine status:
Slot 0:
  Current state          Master
  Election priority      Master (default)
  Temperature            43 degrees C / 109 degrees F
  DRAM                   2048 MB
  Memory utilization     11 percent
  CPU utilization:
    User                 1 percent
    Background           0 percent
    Kernel               2 percent
    Interrupt            0 percent
    Idle                 97 percent
  Model                  RE-3.0
  Serial ID              210865700403
  Start time             2003-12-23 12:25:55 PST
  Uptime                 6 days, 22 hours, 33 minutes, 24 seconds
  Last reboot reason     Router rebooted after a normal shutdown
  Load averages:        1 minute   5 minute   15 minute
                        0.24       0.13       0.04

Routing Engine status:
Slot 1:
  Current state          Backup
  Election priority      Backup (default)
  Temperature            40 degrees C / 104 degrees F
  DRAM                   2048 MB
  Memory utilization     9 percent
  CPU utilization:
    User                 0 percent
    Background           0 percent
    Kernel               0 percent
    Interrupt            0 percent
    Idle                 100 percent
  Model                  RE-3.0
  Serial ID              210865700332
  Start time             2003-12-23 12:25:55 PST
  Uptime                 6 days, 22 hours, 33 minutes, 21 seconds

```



Last reboot reason Router rebooted after a normal shutdown

**show chassis  
routing-engine  
(MX240 Router)**

```
user@host> show chassis routing-engine
Routing Engine status:
Slot 0:
  Current state           Backup
  Election priority       Master (default)
  Temperature             40 degrees C / 104 degrees F
  CPU temperature         47 degrees C / 116 degrees F
  DRAM                    3584 MB
  Memory utilization      7 percent
  CPU utilization:
    User                  0 percent
    Background            0 percent
    Kernel                0 percent
    Interrupt             0 percent
    Idle                  100 percent
  Model                   RE-S-2000
  Serial ID               1000703522
  Start time              2007-12-19 10:35:40 PST
  Uptime                  16 days, 3 hours, 15 minutes, 23 seconds
  Last reboot reason      Router rebooted after a normal shutdown
```

**show chassis  
routing-engine  
(MX480 Router)**

```
user@host> show chassis routing-engine
Routing Engine status:
Slot 0:
  Current state           Master
  Election priority       Master (default)
  Temperature             41 degrees C / 105 degrees F
  CPU temperature         38 degrees C / 100 degrees F
  DRAM                    2048 MB
  Memory utilization      13 percent
  CPU utilization:
    User                  0 percent
    Background            0 percent
    Kernel                2 percent
    Interrupt             0 percent
    Idle                  98 percent
  Model                   RE-S-1300
  Serial ID               1000697044
  Start time              2008-01-04 06:46:08 PST
  Uptime                  8 hours, 17 minutes, 16 seconds
  Last reboot reason      Router rebooted after a normal shutdown
```

**show chassis  
routing-engine  
(MX960 Router)**

```
user@host> show chassis routing-engine
Routing Engine status:
Slot 0:
  Current state           Master
  Election priority       Master (default)
  Temperature             37 degrees C / 98 degrees F
  CPU temperature         37 degrees C / 98 degrees F
  DRAM                    2048 MB
  Memory utilization      18 percent
  CPU utilization:
    User                  0 percent
    Background            0 percent
    Kernel                4 percent
    Interrupt             0 percent
    Idle                  96 percent
```



```

Model                RE-S-1300
Serial ID            1000617944
Start time           2006-10-26 12:37:13 PDT
Uptime               6 days, 4 hours, 59 minutes, 40 seconds
Last reboot reason   Router rebooted after a normal shutdown
Load averages:       1 minute   5 minute  15 minute
                     0.16       0.08     0.02

```

### show chassis routing-engine (MX2010 Router)

```
user@host> show chassis routing-engine
```

#### Routing Engine status:

##### Slot 0:

```

Current state        Master
Election priority     Master (default)
Temperature           3 degrees C / 37 degrees F
CPU temperature       3 degrees C / 37 degrees F
DRAM                 17152 MB
Memory utilization    13 percent
CPU utilization:
  User                0 percent
  Background          0 percent
  Kernel              4 percent
  Interrupt           2 percent
  Idle                95 percent
Model                RE-S-1800x4
Serial ID            9009099704
Start time           2012-10-02 14:33:32 PDT
Uptime               14 hours, 39 minutes, 39 seconds
Last reboot reason   Router rebooted after a normal shutdown.
Load averages:       1 minute   5 minute  15 minute
                     0.06       0.05     0.01

```

#### Routing Engine status:

##### Slot 1:

```

Current state        Backup
Election priority     Backup (default)
Temperature           1 degrees C / 33 degrees F
CPU temperature       2 degrees C / 35 degrees F
DRAM                 17152 MB
Memory utilization    11 percent
CPU utilization:
  User                0 percent
  Background          0 percent
  Kernel              0 percent
  Interrupt           0 percent
  Idle                100 percent
Model                RE-S-1800x4
Serial ID            9009099706
Start time           2012-10-02 10:36:06 PDT
Uptime               18 hours, 36 minutes, 57 seconds
Last reboot reason   Router rebooted after a normal shutdown.
Load averages:       1 minute   5 minute  15 minute
                     0.01       0.00     0.00

```

### show chassis routing-engine (MX2020 Router)

```
user@host> show chassis routing-engine
```

#### Routing Engine status:

##### Slot 0:

```

Current state        Master
Election priority     Master (default)
Temperature           6 degrees C / 42 degrees F
CPU temperature       6 degrees C / 42 degrees F

```



```

DRAM 17152 MB
Memory utilization 14 percent
CPU utilization:
  User 1 percent
  Background 0 percent
  Kernel 7 percent
  Interrupt 2 percent
  Idle 91 percent
Model RE-S-1800x4
Serial ID 9009089704
Start time 2012-10-02 11:05:24 PDT
Uptime 2 days, 15 hours, 49 minutes, 13 seconds
Last reboot reason Router rebooted after a normal shutdown.
Load averages: 1 minute 5 minute 15 minute
                0.10 0.05 0.01

Routing Engine status:
Slot 1:
  Current state Backup
  Election priority Backup (default)
  Temperature 7 degrees C / 44 degrees F
  CPU temperature 5 degrees C / 41 degrees F
  DRAM 17152 MB
  Memory utilization 12 percent
  CPU utilization:
    User 0 percent
    Background 0 percent
    Kernel 0 percent
    Interrupt 0 percent
    Idle 99 percent
  Model RE-S-1800x4
  Serial ID 9009094138
  Start time 2012-10-02 11:09:57 PDT
  Uptime 2 days, 15 hours, 44 minutes, 27 seconds
  Last reboot reason Router rebooted after a normal shutdown.
  Load averages: 1 minute 5 minute 15 minute
                  0.00 0.00 0.00

```

show chassis  
routing-engine (T320  
router)

```

user@host> show chassis routing-engine
Slot 0:
  Current state Master
  Election priority Master (default)
  Temperature 51 degrees C / 123 degrees F
  CPU temperature 55 degrees C / 131 degrees F
  DRAM 3584 MB
  Memory utilization 11 percent
  CPU utilization:
    User 0 percent
    Background 0 percent
    Kernel 2 percent
    Interrupt 0 percent
    Idle 97 percent
  Model RE-A-2000
  Serial ID 9009010618
  Start time 2012-10-10 01:24:05 PDT
  Uptime 5 days, 10 hours, 49 minutes, 23 seconds
  Last reboot reason 0x1:power cycle/failure
  Load averages: 1 minute 5 minute 15 minute
                  0.00 0.05 0.04

Routing Engine status:
Slot 1:
  Current state Backup

```



```

Election priority          Backup (default)
Temperature                45 degrees C / 113 degrees F
CPU temperature            48 degrees C / 118 degrees F
DRAM                      3584 MB
Memory utilization        9 percent
CPU utilization:
  User                    0 percent
  Background              0 percent
  Kernel                  0 percent
  Interrupt               0 percent
  Idle                    100 percent
Model                     RE-A-2000
Serial ID                 9009003642
Start time                2012-10-10 01:24:04 PDT
Uptime                   5 days, 10 hours, 49 minutes, 28 seconds
Last reboot reason        0x1:power cycle/failure

```

**show chassis  
routing-engine (T640  
router)**

```
user@host> show chassis routing-engine
```

```
Routing Engine status:
```

```
Slot 0:
```

```

Current state             Master
Election priority         Master (default)
Temperature               50 degrees C / 122 degrees F
CPU temperature           58 degrees C / 136 degrees F
DRAM                     3584 MB
Memory utilization        14 percent
CPU utilization:
  User                    1 percent
  Background              0 percent
  Kernel                  4 percent
  Interrupt               1 percent
  Idle                    95 percent
Model                    RE-A-2000
Serial ID                1000686556
Start time                2012-10-10 01:24:02 PDT
Uptime                   5 days, 10 hours, 50 minutes, 27 seconds
Last reboot reason        0x1:power cycle/failure
Load averages:           1 minute   5 minute   15 minute
                        1.24       0.33       0.12

```

```
Routing Engine status:
```

```
Slot 1:
```

```

Current state             Backup
Election priority         Backup (default)
Temperature               44 degrees C / 111 degrees F
CPU temperature           49 degrees C / 120 degrees F
DRAM                     3584 MB
Memory utilization        12 percent
CPU utilization:
  User                    0 percent
  Background              0 percent
  Kernel                  0 percent
  Interrupt               1 percent
  Idle                    99 percent
Model                    RE-A-2000
Serial ID                1000702739
Start time                2012-10-10 01:24:02 PDT
Uptime                   5 days, 10 hours, 50 minutes, 26 seconds
Last reboot reason        0x1:power cycle/failure

```

```
user@host> show chassis routing-engine
```



```
show chassis
routing-engine (T1600
router)
```

```
Routing Engine status:
Slot 0:
  Current state           Master
  Election priority       Master (default)
  Temperature             48 degrees C / 118 degrees F
  CPU temperature         58 degrees C / 136 degrees F
  DRAM                    3584 MB
  Memory utilization      13 percent
  CPU utilization:
    User                  0 percent
    Background            0 percent
    Kernel                3 percent
    Interrupt             1 percent
    Idle                  96 percent
  Model                   RE-A-2000
  Serial ID               1000704521
  Start time              2012-10-10 01:23:41 PDT
  Uptime                  5 days, 10 hours, 46 minutes, 56 seconds
  Last reboot reason      0x1:power cycle/failure
  Load averages:         1 minute   5 minute   15 minute
                           0.05       0.03       0.01

Routing Engine status:
Slot 1:
  Current state           Backup
  Election priority       Backup (default)
  Temperature             44 degrees C / 111 degrees F
  CPU temperature         48 degrees C / 118 degrees F
  DRAM                    3584 MB
  Memory utilization      12 percent
  CPU utilization:
    User                  0 percent
    Background            0 percent
    Kernel                0 percent
    Interrupt             0 percent
    Idle                  100 percent
  Model                   RE-A-2000
  Serial ID               9009006579
  Start time              2012-10-10 01:23:42 PDT
  Uptime                  5 days, 10 hours, 46 minutes, 54 seconds
  Last reboot reason      0x1:power cycle/failure
```

```
show chassis
routing-engine (T4000
router)
```

```
user@host> show chassis routing-engine
Routing Engine status:
Slot 0:
  Current state           Master
  Election priority       Master (default)
  Temperature             33 degrees C / 91 degrees F
  CPU temperature         50 degrees C / 122 degrees F
  DRAM                    8960 MB
  Memory utilization      18 percent
  CPU utilization:
    User                  0 percent
    Background            0 percent
    Kernel                4 percent
    Interrupt             1 percent
    Idle                  95 percent
  Model                   RE-DUO-1800
  Serial ID               P737F-002248
  Start time              2012-02-09 22:49:53 PST
  Uptime                  2 hours, 21 minutes, 35 seconds
  Last reboot reason      Router rebooted after a normal shutdown.
```



```

Load averages:          1 minute   5 minute  15 minute
                        0.00        0.04     0.00

Routing Engine status:
Slot 1:
  Current state          Backup
  Election priority      Backup (default)
  Temperature            32 degrees C / 89 degrees F
  CPU temperature        46 degrees C / 114 degrees F
  DRAM                   8960 MB
  Memory utilization     24 percent
  CPU utilization:
    User                 0 percent
    Background           0 percent
    Kernel               0 percent
    Interrupt            0 percent
    Idle                 99 percent
  Model                  RE-DUO-1800
  Serial ID              P737F-002653
  Start time             2012-02-08 20:12:51 PST
  Uptime                 1 day, 4 hours, 58 minutes, 28 seconds
  Last reboot reason     Router rebooted after a normal shutdown.

```

**show chassis  
routing-engine (TX  
Matrix Router)**

```

user@host> show chassis routing-engine
scc-re0:

```

```

-----
Routing Engine status:
Slot 0:
  Current state          Master
  Election priority      Master (default)
  Temperature            34 degrees C / 93 degrees F
  CPU temperature        33 degrees C / 91 degrees F
  DRAM                   2048 MB
  Memory utilization     12 percent
  CPU utilization:
    User                 0 percent
    Background           0 percent
    Kernel               2 percent
    Interrupt            0 percent
    Idle                 98 percent
  Model                  RE-4.0
  Serial ID              P11123900153
  Start time             2004-08-05 18:42:05 PDT
  Uptime                 9 days, 22 hours, 49 minutes, 50 seconds
  Last reboot reason     Router rebooted after a normal shutdown
  Load averages:        1 minute   5 minute  15 minute
                        0.00        0.08     0.07

```

```

lcc0-re0:

```

```

-----
Routing Engine status:
Slot 0:
  Current state          Master
  Election priority      Master (default)
  Temperature            33 degrees C / 91 degrees F
  CPU temperature        30 degrees C / 86 degrees F
  DRAM                   2048 MB
  Memory utilization     12 percent
  CPU utilization:
    User                 0 percent
    Background           0 percent
    Kernel               1 percent

```



```

        Interrupt          0 percent
        Idle               98 percent
        Model              RE-3.0
        Serial ID          210865700363
        Start time         2004-08-05 18:42:05 PDT
        Uptime              9 days, 22 hours, 48 minutes, 20 seconds
        Last reboot reason  Router rebooted after a normal shutdown
        Load averages:     1 minute   5 minute   15 minute
                           0.00       0.02       0.00

```

lcc2-re0:

-----  
Routing Engine status:

Slot 0:

```

        Current state      Master
        Election priority   Master (default)
        Temperature         34 degrees C / 93 degrees F
        CPU temperature      35 degrees C / 95 degrees F
        DRAM                2048 MB
        Memory utilization   12 percent
        CPU utilization:
            User            0 percent
            Background      0 percent
            Kernel          2 percent
            Interrupt       0 percent
            Idle            98 percent
        Model              RE-4.0
        Serial ID          P11123900126
        Start time         2004-08-05 18:42:05 PDT
        Uptime              9 days, 22 hours, 49 minutes, 4 seconds
        Last reboot reason  Router rebooted after a normal shutdown
        Load averages:     1 minute   5 minute   15 minute
                           0.01       0.01       0.0

```

**show chassis  
routing-engine lcc (TX  
Matrix Router)**

user@host> show chassis routing-engine 0 lcc 0

lcc0-re0:

-----  
Routing Engine status:

Slot 0:

```

        Current state      Master
        Election priority   Master (default)
        Temperature         33 degrees C / 91 degrees F
        CPU temperature      30 degrees C / 86 degrees F
        DRAM                2048 MB
        Memory utilization   12 percent
        CPU utilization:
            User            0 percent
            Background      0 percent
            Kernel          1 percent
            Interrupt       0 percent
            Idle            98 percent
        Model              RE-3.0
        Serial ID          210865700363
        Start time         2004-08-05 18:42:05 PDT
        Uptime              7 days, 22 hours, 49 minutes, 6 seconds
        Last reboot reason  Router rebooted after a normal shutdown
        Load averages:     1 minute   5 minute   15 minute
                           0.00       0.00       0.00

```

user@host> show chassis routing-engine bios



**show chassis  
routing-engine bios  
(TX Matrix Router)**

```
scc-re0:
-----
Routing Engine BIOS Version: V1.0.0
lcc0-re0:
-----
Routing Engine BIOS Version: V1.0.17
lcc2-re0:
-----
Routing Engine BIOS Version: V1.0.0
```

**show chassis  
routing-engine (TX  
Matrix Plus Router)**

```
user@host> show chassis routing-engine
sfc0-re0:
-----
Routing Engine status:
Slot 0:
  Current state           Master
  Election priority       Master (default)
  Temperature             27 degrees C / 80 degrees F
  CPU temperature         42 degrees C / 107 degrees F
  DRAM                    3327 MB
  Memory utilization      12 percent
  CPU utilization:
    User                  0 percent
    Background            0 percent
    Kernel                 2 percent
    Interrupt              0 percent
    Idle                   98 percent
  Model                   RE-TXP-SFC
  Serial ID               737A-1024
  Start time              2009-05-11 17:39:49 PDT
  Uptime                  3 hours, 45 minutes, 25 seconds
  Last reboot reason      Router rebooted after a normal shutdown.
  Load averages:         1 minute   5 minute   15 minute
                        0.00         0.00         0.00

Routing Engine status:
Slot 1:
  Current state           Backup
  Election priority       Backup (default)
  Temperature             29 degrees C / 84 degrees F
  CPU temperature         43 degrees C / 109 degrees F
  DRAM                    3327 MB
  Memory utilization      11 percent
  CPU utilization:
    User                  0 percent
    Background            0 percent
    Kernel                 0 percent
    Interrupt              0 percent
    Idle                   100 percent
  Model                   RE-TXP-SFC
  Serial ID               737A-1024
  Start time              2009-05-11 17:08:54 PDT
  Uptime                  4 hours, 16 minutes, 52 seconds
  Last reboot reason      0x1:power cycle/failure

lcc0-re0:
-----
Routing Engine status:
Slot 0:
  Current state           Master
  Election priority       Master (default)
  Temperature             30 degrees C / 86 degrees F
```



```

CPU temperature      43 degrees C / 109 degrees F
DRAM                3327 MB
Memory utilization   9 percent
CPU utilization:
  User              0 percent
  Background        0 percent
  Kernel            2 percent
  Interrupt         0 percent
  Idle              98 percent
Model               RE-TXP-LCC
Serial ID           737F-1024
Start time          2009-05-11 17:40:32 PDT
Uptime              3 hours, 44 minutes, 51 seconds
Last reboot reason   Router rebooted after a normal shutdown.
Load averages:      1 minute   5 minute   15 minute
                    0.00       0.00       0.00

```

#### Routing Engine status:

##### Slot 1:

```

Current state        Backup
Election priority     Backup (default)
Temperature          30 degrees C / 86 degrees F
CPU temperature       43 degrees C / 109 degrees F
DRAM                3327 MB
Memory utilization   9 percent
CPU utilization:
  User              0 percent
  Background        0 percent
  Kernel            0 percent
  Interrupt         0 percent
  Idle              100 percent
Model               RE-TXP-LCC
Serial ID           737F-1024
Start time          2009-05-06 17:31:32 PDT
Uptime              5 days, 3 hours, 54 minutes, 19 seconds
Last reboot reason   Router rebooted after a normal shutdown.

```

**show chassis  
routing-engine lcc (TX  
Matrix Plus Router)**

```

user@host> show chassis routing-engine 0 lcc 0
1cc0-re0:

```

#### Routing Engine status:

##### Slot 0:

```

Current state        Master
Election priority     Master (default)
Temperature          30 degrees C / 86 degrees F
CPU temperature       43 degrees C / 109 degrees F
DRAM                3327 MB
Memory utilization   9 percent
CPU utilization:
  User              0 percent
  Background        0 percent
  Kernel            2 percent
  Interrupt         0 percent
  Idle              98 percent
Model               RE-TXP-LCC
Serial ID           737F-1024
Start time          2009-05-11 17:40:32 PDT
Uptime              3 hours, 45 minutes, 26 seconds
Last reboot reason   Router rebooted after a normal shutdown.
Load averages:      1 minute   5 minute   15 minute
                    0.00       0.00       0.00

```

#### Routing Engine status:



```

Slot 1:
  Current state          Backup
  Election priority      Backup (default)
  Temperature            30 degrees C / 86 degrees F
  CPU temperature        43 degrees C / 109 degrees F
  DRAM                   3327 MB
  Memory utilization     9 percent
  CPU utilization:
    User                 0 percent
    Background           0 percent
    Kernel               0 percent
    Interrupt            0 percent
    Idle                 100 percent
  Model                 RE-TXP-LCC
  Serial ID             737F-1024
  Start time            2009-05-06 17:31:32 PDT
  Uptime                5 days, 3 hours, 54 minutes, 59 seconds
  Last reboot reason    Router rebooted after a normal shutdown.

```

**show chassis  
routing-engine bios  
(TX Matrix Plus  
Router)**

```
user@host> show chassis routing-engine bios
```

```
sfc0-re0:
```

```
-----
Routing Engine BIOS Version: V0.0.Z
```

```
lcc0-re0:
```

```
-----
Routing Engine BIOS Version: V0.0.N
```

**show chassis  
routing-engine (QFX  
Series)**

```
user@switch> show chassis routing-engine
```

```
Routing Engine status:
```

```
Slot 0:
```

```
Current state Master
```

```
Election priority Master (default)
```

```
DRAM 2820 MB
```

```
Memory utilization 49 percent
```

```
CPU utilization:
```

```
User 1 percent
```

```
Background 0 percent
```

```
Kernel 1 percent
```

```
Interrupt 0 percent
```

```
Idle 97 percent
```

```
Model QFX3500-48S4Q
```

```
Serial ID S/N ED3709
```

```
Uptime 3 days, 4 hours, 29 minutes, 42 seconds
```

```
Last reboot reason 0x200:chassis control reset
```

```
Load averages: 1 minute 5 minute 15 minute
```

```
0.37 0.26 0.19
```

**show chassis  
routing-engine (PTX)**

```
user@switch> show chassis routing-engine
```

```
Routing Engine status:
```

```
Slot 0:
```



### Series Packet Transport Switch)

```

Current state                Master
Election priority            Master (default)
Temperature                  60 degrees C / 140 degrees F
CPU temperature              76 degrees C / 168 degrees F
DRAM                        17152 MB
Memory utilization           11 percent
CPU utilization:
  User                       0 percent
  Background                 0 percent
  Kernel                     4 percent
  Interrupt                  0 percent
  Idle                       95 percent
Model                        RE-DUO-2600
Serial ID                    P737A-002231
Start time                   2011-12-21 16:54:37 PST
Uptime                       25 minutes, 44 seconds
Last reboot reason           Router rebooted after a normal shutdown.
Load averages:               1 minute  5 minute  15 minute
                              0.01      0.02      0.06

Routing Engine status:
Slot 1:
  Current state              Backup
  Election priority          Backup (default)
  Temperature                 50 degrees C / 122 degrees F
  CPU temperature            64 degrees C / 147 degrees F
  DRAM                       17152 MB
  Memory utilization         10 percent
  CPU utilization:
    User                     0 percent
    Background               0 percent
    Kernel                   0 percent
    Interrupt                0 percent
    Idle                     99 percent
  Model                      RE-DUO-2600
  Serial ID                  P737A-002438
  Start time                 2011-12-21 16:52:26 PST
  Uptime                     27 minutes, 49 seconds
  Last reboot reason         Router rebooted after a normal shutdown.

```

### show chassis routing-engine (ACX2000 Universal Access Router)

```

user@host> show chassis routing-engine
Routing Engine status:
  Temperature                 53 degrees C / 127 degrees F
  DRAM                       1536 MB
  Memory utilization          25 percent
  CPU utilization:
    User                      0 percent
    Background                0 percent
    Kernel                    0 percent
    Interrupt                  1 percent
    Idle                      99 percent
  Model                       RE-ACX-2000
  Start time                   2012-05-09 00:57:07 PDT
  Uptime                       5 days, 3 hours, 16 minutes, 15 seconds
  Last reboot reason           Router rebooted after a normal shutdown.
  Load averages:              1 minute  5 minute  15 minute
                              0.00      0.03      0.05

```

### show chassis routing-engine

```

user@host> show chassis routing-engine
Routing Engine status:
  Temperature                 36 degrees C / 96 degrees F

```



(ACX1000 Universal  
Access Router)

DRAM	768 MB
Memory utilization	50 percent
CPU utilization:	
User	3 percent
Background	0 percent
Kernel	6 percent
Interrupt	0 percent
Idle	91 percent
Model	RE-ACX-1000
Start time	2012-05-10 07:12:23 PDT
Uptime	4 days, 10 hours, 46 minutes, 53 seconds
Last reboot reason	Router rebooted after a normal shutdown.
Load averages:	1 minute    5 minute    15 minute
	0.00            0.00            0.00



## show chassis temperature-thresholds

<b>Syntax</b>	show chassis temperature-thresholds
<b>Syntax (TX Matrix Routers)</b>	show chassis temperature-thresholds <lcc <i>number</i>   scc>
<b>Syntax (TX Matrix Plus Routers)</b>	show chassis temperature-thresholds <lcc <i>number</i>   sfc <i>number</i> >
<b>Syntax (MX Series Routers)</b>	show chassis temperature-thresholds <all-members> <local> <member <i>member-id</i> >
<b>Syntax (MX2010 3D Universal Edge Routers)</b>	show chassis temperature-thresholds
<b>Syntax (MX2020 3D Universal Edge Routers)</b>	show chassis temperature-thresholds
<b>Syntax (QFX Series)</b>	show chassis temperature-thresholds <interconnect-device <i>name</i> > <node-device <i>name</i> >
<b>Release Information</b>	<p>Command introduced in Junos OS Release 8.0.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>sfc</b> command introduced for the TX Matrix Plus router in Junos OS Release 9.6.</p> <p>Command introduced in Junos OS Release 11.1 for QFX Series.</p> <p>Command introduced in Junos OS Release 12.1 for T4000 Core Routers.</p> <p>Command introduced in Junos OS Release 12.1 for PTX Series Packet Transport Switches.</p> <p>Command introduced in Junos OS Release 12.3 for MX2020 3D Universal Edge Routers.</p> <p>Command introduced in Junos OS Release 12.3 for MX2010 3D Universal Edge Routers.</p>
<b>Description</b>	Display chassis temperature threshold settings, in degrees Celsius.
<b>Options</b>	<p><b>none</b>—Display the temperature threshold details.</p> <p><b>all-members</b>—(MX Series routers only) (Optional) Display the chassis temperature threshold settings of all member routers in the Virtual Chassis configuration.</p> <p><b>interconnect-device <i>name</i></b>—(QFabric systems only) (Optional) Display the chassis temperature threshold settings of the Interconnect device.</p> <p><b>lcc <i>number</i></b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display the temperature threshold details of a specified T640 router (or line-card chassis) that is connected to a TX Matrix router. On a TX Matrix Plus router, display the temperature threshold details of a specified T1600 router (or line-card chassis).</p>



that is connected to a TX Matrix Plus router. Replace *number* with a value from 0 through 3.

**local**—(MX Series routers only) (Optional) Display the chassis temperature threshold settings of the local Virtual Chassis member.

**member *member-id***—(MX Series routers only) (Optional) Display the chassis temperature threshold settings of the specified member of the Virtual Chassis configuration. Replace *member-id* with a value of 0 or 1.

**node-device *name***—(QFabric systems only) (Optional) Display the chassis temperature threshold settings of the Node device.

**scc**—(TX Matrix routers only) (Optional) Display the temperature threshold details of the TX Matrix router (or switch-card chassis).

**sfc *number***—(TX Matrix Plus routers only) (Optional) Display the temperature threshold details of the TX Matrix Plus router (or switch-fabric chassis). Replace *number* with 0.

**Required Privilege Level**

view

**Related Documentation**

- Defining Alarm Thresholds for System Temperature Sensors

**List of Sample Output**

[show chassis temperature-thresholds on page 804](#)  
[show chassis temperature-thresholds \(MX240, MX480, MX960 Routers with Application Services Modular Line Card\) on page 804](#)  
[show chassis temperature-thresholds \(MX2010 Router\) on page 805](#)  
[show chassis temperature-thresholds \(MX2020 Router\) on page 807](#)  
[show chassis temperature-thresholds \(T4000 Core Routers\) on page 810](#)  
[show chassis temperature-thresholds \(TX Matrix Plus Router\) on page 810](#)  
[show chassis temperature-thresholds lcc \(TX Matrix Plus Router\) on page 812](#)  
[show chassis temperature-thresholds sfc \(TX Matrix Plus Router\) on page 812](#)  
[show chassis temperature-thresholds \(QFX3500 Switch and QFX3600\) on page 813](#)  
[show chassis temperature-thresholds interconnect-device \(QFabric System\) on page 813](#)  
[show chassis temperature-thresholds \(PTX5000 Packet Transport Switch\) on page 813](#)  
[show chassis temperature-thresholds \(MX Routers with Media Services Blade \[MSB\]\) on page 814](#)

**Output Fields**

[Table 56 on page 803](#) lists the output fields for the **show chassis temperature-thresholds** command. Output fields are listed in the approximate order in which they appear.



Table 56: show chassis temperature-thresholds Output Fields

Field name	Field Description
<b>Item</b>	Chassis component. If per FRU per slot thresholds are configured, the components about which information is displayed include the chassis, the Routing Engines, FPCs, and FEBs. If per FRU per slot thresholds are not configured, the components about which information is displayed include the chassis and the Routing Engines.
<b>Fan speed</b>	<p><b>NOTE:</b> On the QFX3500 switch and QFX3600 switch, there are four fan speeds: <b>low</b>, <b>medium-low</b>, <b>medium-high</b>, and <b>high</b>. The fan speed changes at the threshold when going from a low speed to a higher speed. When the fan speed changes from a higher speed to a lower speed, the temperature changes two degrees below the threshold.</p> <p>Temperature threshold settings, in degrees Celsius, for the fans to operate at normal and high speeds.</p> <ul style="list-style-type: none"> <li>• <b>Normal</b>—The fans operate at normal speed if the component is at or below this temperature and all the fans are present and functioning normally.</li> <li>• <b>High</b>—The fans operate at high speed if the component has exceeded this temperature or a fan has failed or is missing.</li> </ul> <p><b>NOTE:</b> For MX480 Routers, there are three fan speeds: <b>Low</b>, <b>Medium</b>, and <b>High</b>.</p> <p>An alarm is not triggered until the temperature exceeds the threshold settings for a yellow alarm or a red alarm.</p>
<b>Yellow alarm</b>	<p>Temperature threshold settings, in degrees Celsius, that trigger a yellow alarm.</p> <ul style="list-style-type: none"> <li>• <b>Normal</b>—The temperature that must be exceeded on the component to trigger a yellow alarm when the fans are running at full speed.</li> <li>• <b>Bad fan</b>—The temperature that must be exceeded on the component to trigger a yellow alarm when one or more fans have failed or are missing.</li> </ul>
<b>Red alarm</b>	<p>Temperature threshold settings, in degrees Celsius, that trigger a red alarm.</p> <ul style="list-style-type: none"> <li>• <b>Normal</b>—The temperature that must be exceeded on the component to trigger a red alarm when the fans are running at full speed.</li> <li>• <b>Bad fan</b>—The temperature that must be exceeded on the component to trigger a red alarm when one or more fans have failed or are missing.</li> </ul>
<b>Fire Shutdown</b>	(T4000 routers and PTX Series Packet Transport Switches only)—Temperature threshold settings, in degrees Celsius, for the network device to shut down.



## Sample Output

show chassis  
temperature-thresholds

user@host> show chassis temperature-thresholds

Item	Fan speed (degrees C)		Yellow alarm (degrees C)		Red alarm (degrees C)	
	Normal	High	Normal	Bad fan	Normal	Bad fan
Chassis default	48	54	65	55	75	65
Routing Engine 0	70	80	95	95	110	110
Routing Engine 1	70	80	95	95	110	110
FPC 0	55	60	75	65	90	80
FPC 1	55	60	75	65	90	80
FPC 2	55	60	75	65	90	80
FPC 3	55	60	75	65	90	80
FPC 4	55	60	75	65	90	80
FPC 5	55	60	75	65	90	80
FPC 6	55	60	75	65	90	80
FPC 7	55	60	75	65	90	80
FPC 8	55	60	75	65	90	80
FPC 9	55	60	75	65	90	80
FPC 10	55	60	75	65	90	80
FPC 11	55	60	75	65	90	80

show chassis  
temperature-thresholds  
(MX240, MX480,  
MX960 Routers with

user@host> show chassis temperature-thresholds

Item	Fan speed (degrees C)		Yellow alarm (degrees C)		Red alarm (degrees C)		Fire Shutdown (degrees C)	
	Normal	High	Normal	Bad fan	Normal	Bad fan	Normal	Bad fan



Application Services  
Modular Line Card)

Normal							
Chassis default	48	54	65	55	75	65	
100							
Routing Engine 0	70	80	95	95	110	110	
112							
Routing Engine 1	70	80	95	95	110	110	
112							
FPC 0	55	60	75	65	90	80	
95							
FPC 1	55	60	75	65	90	80	
95							
FPC 2	55	60	75	65	90	80	
95							
FPC 4	55	60	75	65	90	80	
95							
FPC 5	55	60	75	65	90	80	
95							

show chassis  
temperature-thresholds  
(MX2010 Router)

```
user@host> show chassis temperature-thresholds
```

Item	Fan speed		Yellow alarm		Red alarm		Fire Shutdown	
	(degrees C)		(degrees C)		(degrees C)		(degrees C)	
	Normal	High	Normal	Bad fan	Normal	Bad fan	Normal	
Routing Engine 0	70	80	95	95	110	110	112	
Routing Engine 1	70	80	95	95	110	110	112	
CB 0 IntakeA-Zone0	60	65	78	75	85	80	95	
CB 0 IntakeB-Zone1	60	65	78	75	85	80	95	
CB 0 IntakeC-Zone0	60	65	78	75	85	80	95	
CB 0 ExhaustA-Zone0	60	65	78	75	85	80	95	
CB 0 ExhaustB-Zone1	60	65	78	75	85	80	95	
CB 0 TCBC-Zone0	60	65	78	75	85	80	95	
CB 1 IntakeA-Zone0	60	65	78	75	85	80	95	
CB 1 IntakeB-Zone1	60	65	78	75	85	80	95	
CB 1 IntakeC-Zone0	60	65	78	75	85	80	95	
CB 1 ExhaustA-Zone0	60	65	78	75	85	80	95	
CB 1 ExhaustB-Zone1	60	65	78	75	85	80	95	
CB 1 TCBC-Zone0	60	65	78	75	85	80	95	
SPMB 0 Intake	56	62	75	63	83	76	95	
SPMB 1 Intake	56	62	75	63	83	76	95	
SFB 0 Intake-Zone0	56	62	75	63	82	70	87	
SFB 0 Exhaust-Zone1	56	62	75	63	82	70	87	
SFB 0 IntakeA-Zone0	56	62	75	63	82	70	87	
SFB 0 IntakeB-Zone1	56	62	75	63	82	70	87	
SFB 0 Exhaust-Zone0	56	62	75	63	82	70	87	
SFB 0 SFB-XF2-Zone1	70	80	90	90	107	107	115	
SFB 0 SFB-XF1-Zone0	70	80	90	90	107	107	115	
SFB 0 SFB-XF0-Zone0	70	80	90	90	107	107	115	
SFB 1 Intake-Zone0	56	62	75	63	82	70	87	
SFB 1 Exhaust-Zone1	56	62	75	63	82	70	87	
SFB 1 IntakeA-Zone0	56	62	75	63	82	70	87	
SFB 1 IntakeB-Zone1	56	62	75	63	82	70	87	
SFB 1 Exhaust-Zone0	56	62	75	63	82	70	87	
SFB 1 SFB-XF2-Zone1	70	80	90	90	107	107	115	
SFB 1 SFB-XF1-Zone0	70	80	90	90	107	107	115	
SFB 1 SFB-XF0-Zone0	70	80	90	90	107	107	115	
SFB 2 Intake-Zone0	56	62	75	63	82	70	87	
SFB 2 Exhaust-Zone1	56	62	75	63	82	70	87	
SFB 2 IntakeA-Zone0	56	62	75	63	82	70	87	
SFB 2 IntakeB-Zone1	56	62	75	63	82	70	87	
SFB 2 Exhaust-Zone0	56	62	75	63	82	70	87	
SFB 2 SFB-XF2-Zone1	70	80	90	90	107	107	115	
SFB 2 SFB-XF1-Zone0	70	80	90	90	107	107	115	



SFB 2 SFB-XF0-Zone0	70	80	90	90	107	107	115
SFB 3 Intake-Zone0	56	62	75	63	82	70	87
SFB 3 Exhaust-Zone1	56	62	75	63	82	70	87
SFB 3 IntakeA-Zone0	56	62	75	63	82	70	87
SFB 3 IntakeB-Zone1	56	62	75	63	82	70	87
SFB 3 Exhaust-Zone0	56	62	75	63	82	70	87
SFB 3 SFB-XF2-Zone1	70	80	90	90	107	107	115
SFB 3 SFB-XF1-Zone0	70	80	90	90	107	107	115
SFB 3 SFB-XF0-Zone0	70	80	90	90	107	107	115
SFB 4 Intake-Zone0	56	62	75	63	82	70	87
SFB 4 Exhaust-Zone1	56	62	75	63	82	70	87
SFB 4 IntakeA-Zone0	56	62	75	63	82	70	87
SFB 4 IntakeB-Zone1	56	62	75	63	82	70	87
SFB 4 Exhaust-Zone0	56	62	75	63	82	70	87
SFB 4 SFB-XF2-Zone1	70	80	90	90	107	107	115
SFB 4 SFB-XF1-Zone0	70	80	90	90	107	107	115
SFB 4 SFB-XF0-Zone0	70	80	90	90	107	107	115
SFB 5 Intake-Zone0	56	62	75	63	82	70	87
SFB 5 Exhaust-Zone1	56	62	75	63	82	70	87
SFB 5 IntakeA-Zone0	56	62	75	63	82	70	87
SFB 5 IntakeB-Zone1	56	62	75	63	82	70	87
SFB 5 Exhaust-Zone0	56	62	75	63	82	70	87
SFB 5 SFB-XF2-Zone1	70	80	90	90	107	107	115
SFB 5 SFB-XF1-Zone0	70	80	90	90	107	107	115
SFB 5 SFB-XF0-Zone0	70	80	90	90	107	107	115
SFB 6 Intake-Zone0	56	62	75	63	82	70	87
SFB 6 Exhaust-Zone1	56	62	75	63	82	70	87
SFB 6 IntakeA-Zone0	56	62	75	63	82	70	87
SFB 6 IntakeB-Zone1	56	62	75	63	82	70	87
SFB 6 Exhaust-Zone0	56	62	75	63	82	70	87
SFB 6 SFB-XF2-Zone1	70	80	90	90	107	107	115
SFB 6 SFB-XF1-Zone0	70	80	90	90	107	107	115
SFB 6 SFB-XF0-Zone0	70	80	90	90	107	107	115
SFB 7 Intake-Zone0	56	62	75	63	82	70	87
SFB 7 Exhaust-Zone1	56	62	75	63	82	70	87
SFB 7 IntakeA-Zone0	56	62	75	63	82	70	87
SFB 7 IntakeB-Zone1	56	62	75	63	82	70	87
SFB 7 Exhaust-Zone0	56	62	75	63	82	70	87
SFB 7 SFB-XF2-Zone1	70	80	90	90	107	107	115
SFB 7 SFB-XF1-Zone0	70	80	90	90	107	107	115
SFB 7 SFB-XF0-Zone0	70	80	90	90	107	107	115
FPC 0	55	60	75	65	95	80	100
FPC 1	55	60	75	65	90	80	95
FPC 2	55	60	75	65	95	80	100
FPC 3	55	60	75	65	90	80	95
FPC 4	55	60	75	65	90	80	95
FPC 5	55	60	75	65	95	80	100
FPC 6	55	60	75	65	90	80	95
FPC 7	55	60	75	65	95	80	100
FPC 8	55	60	75	65	90	80	95
FPC 9	55	60	75	65	95	80	100
ADC 0 Intake	56	62	75	63	83	76	95
ADC 0 Exhaust	56	62	75	63	83	76	95
ADC 0 ADC-XF1	70	80	90	90	107	107	115
ADC 0 ADC-XF0	70	80	90	90	107	107	115
ADC 1 Intake	56	62	75	63	83	76	95
ADC 1 Exhaust	56	62	75	63	83	76	95
ADC 1 ADC-XF1	70	80	90	90	107	107	115
ADC 1 ADC-XF0	70	80	90	90	107	107	115
ADC 2 Intake	56	62	75	63	83	76	95
ADC 2 Exhaust	56	62	75	63	83	76	95



ADC 2 ADC-XF1	70	80	90	90	107	107	115
ADC 2 ADC-XF0	70	80	90	90	107	107	115
ADC 3 Intake	56	62	75	63	83	76	95
ADC 3 Exhaust	56	62	75	63	83	76	95
ADC 3 ADC-XF1	70	80	90	90	107	107	115
ADC 3 ADC-XF0	70	80	90	90	107	107	115
ADC 4 Intake	56	62	75	63	83	76	95
ADC 4 Exhaust	56	62	75	63	83	76	95
ADC 4 ADC-XF1	70	80	90	90	107	107	115
ADC 4 ADC-XF0	70	80	90	90	107	107	115
ADC 5 Intake	56	62	75	63	83	76	95
ADC 5 Exhaust	56	62	75	63	83	76	95
ADC 5 ADC-XF1	70	80	90	90	107	107	115
ADC 5 ADC-XF0	70	80	90	90	107	107	115
ADC 6 Intake	56	62	75	63	83	76	95
ADC 6 Exhaust	56	62	75	63	83	76	95
ADC 6 ADC-XF1	70	80	90	90	107	107	115
ADC 6 ADC-XF0	70	80	90	90	107	107	115
ADC 7 Intake	56	62	75	63	83	76	95
ADC 7 Exhaust	56	62	75	63	83	76	95
ADC 7 ADC-XF1	70	80	90	90	107	107	115
ADC 7 ADC-XF0	70	80	90	90	107	107	115
ADC 8 Intake	56	62	75	63	83	76	95
ADC 8 Exhaust	56	62	75	63	83	76	95
ADC 8 ADC-XF1	70	80	90	90	107	107	115
ADC 8 ADC-XF0	70	80	90	90	107	107	115
ADC 9 Intake	56	62	75	63	83	76	95
ADC 9 Exhaust	56	62	75	63	83	76	95
ADC 9 ADC-XF1	70	80	90	90	107	107	115
ADC 9 ADC-XF0	70	80	90	90	107	107	115

show chassis  
temperature-thresholds  
(MX2020 Router)

Item	Fan speed		Yellow alarm		Red alarm		Fire Shutdown
	(degrees C)		(degrees C)		(degrees C)		(degrees C)
	Normal	High	Normal	Bad fan	Normal	Bad fan	Normal
Routing Engine 0	70	80	95	95	110	110	112
Routing Engine 1	70	80	95	95	110	110	112
CB 0 IntakeA-Zone0	60	65	78	75	85	80	95
CB 0 IntakeB-Zone1	60	65	78	75	85	80	95
CB 0 IntakeC-Zone0	60	65	78	75	85	80	95
CB 0 ExhaustA-Zone0	60	65	78	75	85	80	95
CB 0 ExhaustB-Zone1	60	65	78	75	85	80	95
CB 0 TCBC-Zone0	60	65	78	75	85	80	95
CB 1 IntakeA-Zone0	60	65	78	75	85	80	95
CB 1 IntakeB-Zone1	60	65	78	75	85	80	95
CB 1 IntakeC-Zone0	60	65	78	75	85	80	95
CB 1 ExhaustA-Zone0	60	65	78	75	85	80	95
CB 1 ExhaustB-Zone1	60	65	78	75	85	80	95
CB 1 TCBC-Zone0	60	65	78	75	85	80	95
SPMB 0 Intake	56	62	75	63	83	76	95
SPMB 1 Intake	56	62	75	63	83	76	95
SFB 0 Intake-Zone0	56	62	75	63	82	70	87
SFB 0 Exhaust-Zone1	56	62	75	63	82	70	87
SFB 0 IntakeA-Zone0	56	62	75	63	82	70	87
SFB 0 IntakeB-Zone1	56	62	75	63	82	70	87
SFB 0 Exhaust-Zone0	56	62	75	63	82	70	87
SFB 0 SFB-XF2-Zone1	70	80	90	90	107	107	115
SFB 0 SFB-XF1-Zone0	70	80	90	90	107	107	115
SFB 0 SFB-XF0-Zone0	70	80	90	90	107	107	115
SFB 1 Intake-Zone0	56	62	75	63	82	70	87



SFB 1 Exhaust-Zone1	56	62	75	63	82	70	87
SFB 1 IntakeA-Zone0	56	62	75	63	82	70	87
SFB 1 IntakeB-Zone1	56	62	75	63	82	70	87
SFB 1 Exhaust-Zone0	56	62	75	63	82	70	87
SFB 1 SFB-XF2-Zone1	70	80	90	90	107	107	115
SFB 1 SFB-XF1-Zone0	70	80	90	90	107	107	115
SFB 1 SFB-XF0-Zone0	70	80	90	90	107	107	115
SFB 2 Intake-Zone0	56	62	75	63	82	70	87
SFB 2 Exhaust-Zone1	56	62	75	63	82	70	87
SFB 2 IntakeA-Zone0	56	62	75	63	82	70	87
SFB 2 IntakeB-Zone1	56	62	75	63	82	70	87
SFB 2 Exhaust-Zone0	56	62	75	63	82	70	87
SFB 2 SFB-XF2-Zone1	70	80	90	90	107	107	115
SFB 2 SFB-XF1-Zone0	70	80	90	90	107	107	115
SFB 2 SFB-XF0-Zone0	70	80	90	90	107	107	115
SFB 3 Intake-Zone0	56	62	75	63	82	70	87
SFB 3 Exhaust-Zone1	56	62	75	63	82	70	87
SFB 3 IntakeA-Zone0	56	62	75	63	82	70	87
SFB 3 IntakeB-Zone1	56	62	75	63	82	70	87
SFB 3 Exhaust-Zone0	56	62	75	63	82	70	87
SFB 3 SFB-XF2-Zone1	70	80	90	90	107	107	115
SFB 3 SFB-XF1-Zone0	70	80	90	90	107	107	115
SFB 3 SFB-XF0-Zone0	70	80	90	90	107	107	115
SFB 4 Intake-Zone0	56	62	75	63	82	70	87
SFB 4 Exhaust-Zone1	56	62	75	63	82	70	87
SFB 4 IntakeA-Zone0	56	62	75	63	82	70	87
SFB 4 IntakeB-Zone1	56	62	75	63	82	70	87
SFB 4 Exhaust-Zone0	56	62	75	63	82	70	87
SFB 4 SFB-XF2-Zone1	70	80	90	90	107	107	115
SFB 4 SFB-XF1-Zone0	70	80	90	90	107	107	115
SFB 4 SFB-XF0-Zone0	70	80	90	90	107	107	115
SFB 5 Intake-Zone0	56	62	75	63	82	70	87
SFB 5 Exhaust-Zone1	56	62	75	63	82	70	87
SFB 5 IntakeA-Zone0	56	62	75	63	82	70	87
SFB 5 IntakeB-Zone1	56	62	75	63	82	70	87
SFB 5 Exhaust-Zone0	56	62	75	63	82	70	87
SFB 5 SFB-XF2-Zone1	70	80	90	90	107	107	115
SFB 5 SFB-XF1-Zone0	70	80	90	90	107	107	115
SFB 5 SFB-XF0-Zone0	70	80	90	90	107	107	115
SFB 6 Intake-Zone0	56	62	75	63	82	70	87
SFB 6 Exhaust-Zone1	56	62	75	63	82	70	87
SFB 6 IntakeA-Zone0	56	62	75	63	82	70	87
SFB 6 IntakeB-Zone1	56	62	75	63	82	70	87
SFB 6 Exhaust-Zone0	56	62	75	63	82	70	87
SFB 6 SFB-XF2-Zone1	70	80	90	90	107	107	115
SFB 6 SFB-XF1-Zone0	70	80	90	90	107	107	115
SFB 6 SFB-XF0-Zone0	70	80	90	90	107	107	115
SFB 7 Intake-Zone0	56	62	75	63	82	70	87
SFB 7 Exhaust-Zone1	56	62	75	63	82	70	87
SFB 7 IntakeA-Zone0	56	62	75	63	82	70	87
SFB 7 IntakeB-Zone1	56	62	75	63	82	70	87
SFB 7 Exhaust-Zone0	56	62	75	63	82	70	87
SFB 7 SFB-XF2-Zone1	70	80	90	90	107	107	115
SFB 7 SFB-XF1-Zone0	70	80	90	90	107	107	115
SFB 7 SFB-XF0-Zone0	70	80	90	90	107	107	115
FPC 0	55	60	75	65	90	80	95
FPC 1	55	60	75	65	90	80	95
FPC 2	55	60	75	65	90	80	95
FPC 3	55	60	75	65	90	80	95
FPC 4	55	60	75	65	90	80	95
FPC 5	55	60	75	65	90	80	95



FPC 6	55	60	75	65	90	80	95
FPC 7	55	60	75	65	90	80	95
FPC 8	55	60	75	65	90	80	95
FPC 9	55	60	75	65	90	80	95
FPC 10	55	60	75	65	90	80	95
FPC 11	55	60	75	65	90	80	95
FPC 12	55	60	75	65	90	80	95
FPC 13	55	60	75	65	90	80	95
FPC 14	55	60	75	65	90	80	95
FPC 15	55	60	75	65	90	80	95
FPC 16	55	60	75	65	90	80	95
FPC 17	55	60	75	65	90	80	95
FPC 18	55	60	75	65	90	80	95
FPC 19	55	60	75	65	90	80	95
ADC 0 Intake	56	62	75	63	83	76	95
ADC 0 Exhaust	56	62	75	63	83	76	95
ADC 0 ADC-XF1	70	80	90	90	107	107	115
ADC 0 ADC-XF0	70	80	90	90	107	107	115
ADC 1 Intake	56	62	75	63	83	76	95
ADC 1 Exhaust	56	62	75	63	83	76	95
ADC 1 ADC-XF1	70	80	90	90	107	107	115
ADC 1 ADC-XF0	70	80	90	90	107	107	115
ADC 2 Intake	56	62	75	63	83	76	95
ADC 2 Exhaust	56	62	75	63	83	76	95
ADC 2 ADC-XF1	70	80	90	90	107	107	115
ADC 2 ADC-XF0	70	80	90	90	107	107	115
ADC 3 Intake	56	62	75	63	83	76	95
ADC 3 Exhaust	56	62	75	63	83	76	95
ADC 3 ADC-XF1	70	80	90	90	107	107	115
ADC 3 ADC-XF0	70	80	90	90	107	107	115
ADC 4 Intake	56	62	75	63	83	76	95
ADC 4 Exhaust	56	62	75	63	83	76	95
ADC 4 ADC-XF1	70	80	90	90	107	107	115
ADC 4 ADC-XF0	70	80	90	90	107	107	115
ADC 5 Intake	56	62	75	63	83	76	95
ADC 5 Exhaust	56	62	75	63	83	76	95
ADC 5 ADC-XF1	70	80	90	90	107	107	115
ADC 5 ADC-XF0	70	80	90	90	107	107	115
ADC 6 Intake	56	62	75	63	83	76	95
ADC 6 Exhaust	56	62	75	63	83	76	95
ADC 6 ADC-XF1	70	80	90	90	107	107	115
ADC 6 ADC-XF0	70	80	90	90	107	107	115
ADC 7 Intake	56	62	75	63	83	76	95
ADC 7 Exhaust	56	62	75	63	83	76	95
ADC 7 ADC-XF1	70	80	90	90	107	107	115
ADC 7 ADC-XF0	70	80	90	90	107	107	115
ADC 8 Intake	56	62	75	63	83	76	95
ADC 8 Exhaust	56	62	75	63	83	76	95
ADC 8 ADC-XF1	70	80	90	90	107	107	115
ADC 8 ADC-XF0	70	80	90	90	107	107	115
ADC 9 Intake	56	62	75	63	83	76	95
ADC 9 Exhaust	56	62	75	63	83	76	95
ADC 9 ADC-XF1	70	80	90	90	107	107	115
ADC 9 ADC-XF0	70	80	90	90	107	107	115
ADC 10 Intake	56	62	75	63	83	76	95
ADC 10 Exhaust	56	62	75	63	83	76	95
ADC 10 ADC-XF1	70	80	90	90	107	107	115
ADC 10 ADC-XF0	70	80	90	90	107	107	115
ADC 11 Intake	56	62	75	63	83	76	95
ADC 11 Exhaust	56	62	75	63	83	76	95
ADC 11 ADC-XF1	70	80	90	90	107	107	115



ADC 11	ADC-XF0	70	80	90	90	107	107	115
ADC 12	Intake	56	62	75	63	83	76	95
ADC 12	Exhaust	56	62	75	63	83	76	95
ADC 12	ADC-XF1	70	80	90	90	107	107	115
ADC 12	ADC-XF0	70	80	90	90	107	107	115
ADC 13	Intake	56	62	75	63	83	76	95
ADC 13	Exhaust	56	62	75	63	83	76	95
ADC 13	ADC-XF1	70	80	90	90	107	107	115
ADC 13	ADC-XF0	70	80	90	90	107	107	115
ADC 14	Intake	56	62	75	63	83	76	95
ADC 14	Exhaust	56	62	75	63	83	76	95
ADC 14	ADC-XF1	70	80	90	90	107	107	115
ADC 14	ADC-XF0	70	80	90	90	107	107	115
ADC 15	Intake	56	62	75	63	83	76	95
ADC 15	Exhaust	56	62	75	63	83	76	95
ADC 15	ADC-XF1	70	80	90	90	107	107	115
ADC 15	ADC-XF0	70	80	90	90	107	107	115
ADC 16	Intake	56	62	75	63	83	76	95
ADC 16	Exhaust	56	62	75	63	83	76	95
ADC 16	ADC-XF1	70	80	90	90	107	107	115
ADC 16	ADC-XF0	70	80	90	90	107	107	115
ADC 17	Intake	56	62	75	63	83	76	95
ADC 17	Exhaust	56	62	75	63	83	76	95
ADC 17	ADC-XF1	70	80	90	90	107	107	115
ADC 17	ADC-XF0	70	80	90	90	107	107	115
ADC 18	Intake	56	62	75	63	83	76	95
ADC 18	Exhaust	56	62	75	63	83	76	95
ADC 18	ADC-XF1	70	80	90	90	107	107	115
ADC 18	ADC-XF0	70	80	90	90	107	107	115
ADC 19	Intake	56	62	75	63	83	76	95
ADC 19	Exhaust	56	62	75	63	83	76	95
ADC 19	ADC-XF1	70	80	90	90	107	107	115
ADC 19	ADC-XF0	70	80	90	90	107	107	115

#### show chassis temperature-thresholds (T4000 Core Routers)

```
user@host> show chassis temperature-thresholds
```

Item	Fan speed (degrees C)		Yellow alarm (degrees C)		Red alarm (degrees C)		Fire Shutdown (degrees C)
	Normal	High	Normal	Bad fan	Normal	Bad fan	Normal
Chassis default	48	54	65	55	75	65	100
Routing Engine 0	55	65	85	85	100	100	102
Routing Engine 1	55	65	85	85	100	100	102
FPC 0	63	68	75	70	90	83	95
FPC 3	63	68	75	70	90	83	95
FPC 5	56	62	75	63	83	76	95
FPC 6	63	68	75	70	90	83	95
SIB 0	64	70	76	72	87	84	95
SIB 1	64	70	76	72	87	84	95
SIB 2	64	70	76	72	87	84	95
SIB 3	64	70	76	72	87	84	95
SIB 4	64	70	76	72	87	84	95

#### show chassis temperature-thresholds

```
user@host> show chassis temperature-thresholds
sfc0-re0:
-----
```



## (TX Matrix Plus Router)

Item	Fan speed (degrees C)		Yellow alarm (degrees C)		Red alarm (degrees C)	
	Normal	High	Normal	Bad fan	Normal	Bad fan
Chassis default	48	54	65	55	75	65
Routing Engine 0	55	65	85	85	100	100
Routing Engine 1	55	65	85	85	100	100
SIB F13 0	64	70	76	72	90	84
SIB F13 3	64	70	76	72	90	84
SIB F13 6	64	70	76	72	90	84
SIB F13 8	64	70	76	72	90	84
SIB F13 11	64	70	76	72	90	84
SIB F13 12	64	70	76	72	90	84
SIB F2S 16	64	70	76	72	90	84
SIB F2S 17	64	70	76	72	90	84
SIB F2S 18	64	70	76	72	90	84
SIB F2S 19	64	70	76	72	90	84
SIB F2S 20	64	70	76	72	90	84
SIB F2S 21	64	70	76	72	90	84
SIB F2S 22	64	70	76	72	90	84
SIB F2S 23	64	70	76	72	90	84
SIB F2S 24	64	70	76	72	90	84
SIB F2S 25	64	70	76	72	90	84
SIB F2S 26	64	70	76	72	90	84
SIB F2S 27	64	70	76	72	90	84
SIB F2S 28	64	70	76	72	90	84
SIB F2S 29	64	70	76	72	90	84
SIB F2S 30	64	70	76	72	90	84
SIB F2S 31	64	70	76	72	90	84
SIB F2S 32	64	70	76	72	90	84
SIB F2S 33	64	70	76	72	90	84
SIB F2S 34	64	70	76	72	90	84
SIB F2S 35	64	70	76	72	90	84

lcc0-re0:

Item	Fan speed (degrees C)		Yellow alarm (degrees C)		Red alarm (degrees C)	
	Normal	High	Normal	Bad fan	Normal	Bad fan
Chassis default	48	54	65	55	75	65
Routing Engine 0	55	65	85	85	100	100
Routing Engine 1	55	65	85	85	100	100
FPC 1	56	62	75	63	83	76
FPC 3	56	62	75	63	83	76
FPC 4	56	62	75	63	83	76
FPC 6	56	62	75	63	83	76
FPC 7	56	62	75	63	83	76
SIB 0	48	54	65	60	80	75
SIB 1	48	54	65	60	80	75
SIB 2	48	54	65	60	80	75
SIB 3	48	54	65	60	80	75
SIB 4	48	54	65	60	80	75

lcc1-re0:

Item	Fan speed (degrees C)		Yellow alarm (degrees C)		Red alarm (degrees C)	
	Normal	High	Normal	Bad fan	Normal	Bad fan
Chassis default	48	54	65	55	75	65
Routing Engine 0	55	65	85	85	100	100
Routing Engine 1	55	65	85	85	100	100
FPC 1	56	62	75	63	83	76



```

FPC 3          56    62    75    63    83    76
FPC 4          56    62    75    63    83    76
FPC 6          56    62    75    63    83    76
...

```

show chassis  
temperature-thresholds  
lcc (TX Matrix Plus  
Router)

```

user@host> show chassis temperature-thresholds lcc 1
lcc1-re0:

```

```

-----
Item              Fan speed      Yellow alarm      Red alarm
                  (degrees C)      (degrees C)      (degrees C)
                  Normal  High    Normal  Bad fan  Normal  Bad fan
Chassis default   48    54    65      55      75      65
Routing Engine 0   55    65    85      85     100     100
Routing Engine 1   55    65    85      85     100     100
FPC 1             56    62    75      63      83      76
FPC 3             56    62    75      63      83      76
FPC 4             56    62    75      63      83      76
FPC 6             56    62    75      63      83      76
SIB 0             48    54    65      60      80      75
SIB 1             48    54    65      60      80      75
SIB 2             48    54    65      60      80      75
SIB 3             48    54    65      60      80      75
SIB 4             48    54    65      60      80      75

```

show chassis  
temperature-thresholds

```

user@host> show chassis temperature-thresholds sfc 0
sfc0-re0:

```



## sfc (TX Matrix Plus Router)

Item	Fan speed (degrees C)		Yellow alarm (degrees C)		Red alarm (degrees C)	
	Normal	High	Normal	Bad fan	Normal	Bad fan
Chassis default	48	54	65	55	75	65
Routing Engine 0	55	65	85	85	100	100
Routing Engine 1	55	65	85	85	100	100
SIB F13 0	64	70	76	72	90	84
SIB F13 3	64	70	76	72	90	84
SIB F13 6	64	70	76	72	90	84
SIB F13 8	64	70	76	72	90	84
SIB F13 11	64	70	76	72	90	84
SIB F13 12	64	70	76	72	90	84
SIB F2S 16	64	70	76	72	90	84
SIB F2S 17	64	70	76	72	90	84
SIB F2S 18	64	70	76	72	90	84
SIB F2S 19	64	70	76	72	90	84
SIB F2S 20	64	70	76	72	90	84
SIB F2S 21	64	70	76	72	90	84
SIB F2S 22	64	70	76	72	90	84
SIB F2S 23	64	70	76	72	90	84
SIB F2S 24	64	70	76	72	90	84
SIB F2S 25	64	70	76	72	90	84
SIB F2S 26	64	70	76	72	90	84
SIB F2S 27	64	70	76	72	90	84
SIB F2S 28	64	70	76	72	90	84
SIB F2S 29	64	70	76	72	90	84
SIB F2S 30	64	70	76	72	90	84
SIB F2S 31	64	70	76	72	90	84
SIB F2S 32	64	70	76	72	90	84
SIB F2S 33	64	70	76	72	90	84
SIB F2S 34	64	70	76	72	90	84
SIB F2S 35	64	70	76	72	90	84

show chassis  
temperature-thresholds  
(QFX3500 Switch and  
QFX3600)

user@switch&gt; show chassis temperature-thresholds

Item	Fan speed (degrees C)		Yellow alarm (degrees C)		Red alarm (degrees C)	
	Normal	High	Normal	Bad fan	Normal	Bad fan
Chassis default	48	56	53	43	56	46
FPC Sensor TopLeft I	46	54	51	41	54	44
FPC Sensor TopRight I	58	65	62	52	65	55
FPC Sensor TopLeft E	56	64	61	51	64	54
FPC Sensor TopMiddle I	58	64	61	51	64	54
FPC Sensor TopMiddle E	67	74	71	61	74	64
FPC Sensor Bottom I	59	67	64	54	67	57
FPC Sensor Bottom E	66	73	70	60	73	63
FPC Sensor Die Temp	69	75	72	62	75	65
FPC Sensor Mgmt Brd I	46	54	51	41	54	44
FPC Sensor Switch I	56	63	60	50	63	53

show chassis  
temperature-thresholds  
interconnect-device  
(QFabric System)

user@switch&gt; show chassis temperature-thresholds interconnect-device interconnect1

Item	Fan speed		Yellow alarm		Red alarm	
	Normal	High	Normal	Bad fan	Normal	Bad fan
Chassis default	48	54	65	55	75	65

show chassis  
temperature-thresholds

user@switch&gt; show chassis temperature-thresholds

Fan speed		Yellow alarm		Red alarm	Fire Shutdown
-----------	--	--------------	--	-----------	---------------



## (PTX5000 Packet Transport Switch)

Item	(degrees C)		(degrees C)		(degrees C)		(degrees C)	
	Normal	High	Normal	Bad fan	Normal	Bad fan	Normal	Normal
Routing Engine 0	70	75	90	87	102	97	115	
Routing Engine 1	70	75	90	87	102	97	115	
CB 0 Exhaust A	60	65	78	75	85	80	95	
CB 0 Exhaust B	60	65	78	75	85	80	95	
CB 1 Exhaust A	60	65	78	75	85	80	95	
CB 1 Exhaust B	20	25	65	60	80	75	100	
FPC 1 Exhaust A	60	65	78	75	85	80	95	
FPC 1 Exhaust B	60	65	78	75	85	80	95	
FPC 1 TL0	70	75	90	87	102	97	115	
FPC 1 TQ0	70	75	90	87	102	97	115	
FPC 1 TL1	70	75	90	87	102	97	115	
FPC 1 TQ1	70	75	90	87	102	97	115	
FPC 1 TL2	70	75	90	87	102	97	115	
FPC 1 TQ2	70	75	90	87	102	97	115	
FPC 1 TL3	70	75	90	87	102	97	115	
FPC 1 TQ3	70	75	90	87	102	97	115	
FPC 2 Exhaust A	60	65	78	75	85	80	95	
FPC 2 Exhaust B	60	65	78	75	85	80	95	
FPC 2 TL0	70	75	90	87	102	97	115	
FPC 2 TQ0	70	75	90	87	102	97	115	
FPC 2 TL1	70	75	90	87	102	97	115	
FPC 2 TQ1	70	75	90	87	102	97	115	
FPC 2 TL2	70	75	90	87	102	97	115	
FPC 2 TQ2	70	75	90	87	102	97	115	
FPC 2 TL3	70	75	90	87	102	97	115	
FPC 2 TQ3	70	75	90	87	102	97	115	
PIC 2/0 Ambient	60	65	78	75	85	80	95	
PIC 2/0 cfp-2/0/1	60	65	70	67	75	72	85	
PIC 2/1 Ambient	60	65	78	75	85	80	95	
SIB 0 Exhaust	60	65	78	75	85	80	95	
SIB 0 Junction	70	75	90	87	102	97	115	
SIB 1 Exhaust	60	65	78	75	85	80	95	
SIB 1 Junction	70	75	90	87	102	97	115	
SIB 2 Exhaust	60	65	78	75	85	80	95	
SIB 2 Junction	70	75	90	87	102	97	115	
SIB 3 Exhaust	60	65	78	75	85	80	95	
SIB 3 Junction	70	75	90	87	102	97	115	
SIB 4 Exhaust	60	65	78	75	85	80	95	
SIB 4 Junction	70	75	90	87	102	97	115	
SIB 5 Exhaust	60	65	78	75	85	80	95	
SIB 5 Junction	70	75	90	87	102	97	115	
SIB 6 Exhaust	60	65	78	75	85	80	95	
SIB 6 Junction	70	75	90	87	102	97	115	
SIB 7 Exhaust	60	65	78	75	85	80	95	
SIB 7 Junction	70	75	90	87	102	97	115	
SIB 8 Exhaust	60	65	78	75	85	80	95	
SIB 8 Junction	70	75	90	87	102	97	115	

show chassis  
temperature-thresholds  
(MX Routers with

```

user@switch> show chassis temperature-thresholds
Fan speed      Yellow alarm    Red alarm      Fire Shutdown
(degrees C)    (degrees C)    (degrees C)    (degrees C)

```



Media Services Blade  
[MSB])

Item	Normal	High	Normal	Bad fan	Normal	Bad fan
Normal Chassis default	48	54	65	55	75	65
100 Routing Engine 0	70	80	95	95	110	110
112 Routing Engine 1	70	80	95	95	110	110
112 FPC 0	55	60	75	65	90	80
95 FPC 1	55	60	75	65	90	80
95 FPC 2	55	60	75	65	90	80
95 FPC 4	55	60	75	65	90	80
95 FPC 5	55	60	75	65	90	80
95						



## show chassis zones

<b>Syntax</b>	show chassis zones <detail>
<b>Syntax (QFX Series)</b>	show chassis zones <detail> <interconnect-device <i>name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 11.3 for the QFX Series. Command introduced in Junos OS Release 12.3 for MX2020 3D Universal Edge Routers. Command introduced in Junos OS Release 12.3 for MX2010 3D Universal Edge Routers.
<b>Description</b>	(QFabric systems only) Display the status of the two cooling system zones on the Interconnect device. Zone 1 consists of eight (0 – 7) front cards, which are cooled by two fan trays. Zone 2 consists of two control boards and eight rear cards, which are cooled by eight (0 – 7) fan trays. On MX2010 and MX2020 routers, display the status of the cooling system zones of the chassis. Zone 0 consists of the Control Board, ten (0–9) FPCs, and their respective PICs, Switch Fabric Boards, and Adapter Cards. Zone 1 consists of the Routing Engine, Control Board, and Switch Processor Mezzanine Boards.
<b>Options</b>	<p><b>detail</b>—(MX2010 and MX2020 routers only) (Optional) Display detailed status of the cooling system zones.</p> <p><b>detail <i>device-name</i></b>— (QFabric systems only) (Optional) Display detailed status of the two cooling systems on the Interconnect device.</p> <p><b>interconnect-device <i>name</i></b>— (QFabric systems only) (Optional) Display the status of the cooling zones on the Interconnect device.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">request chassis beacon on page 315</a></li> <li>• <a href="#">show chassis fan on page 577</a></li> <li>• <a href="#">show chassis temperature-thresholds on page 801</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show chassis zones interconnect-device (QFabric System) on page 818</a> <a href="#">show chassis zones (MX2010 Router) on page 818</a> <a href="#">show chassis zones detail (MX2010 Router) on page 818</a> <a href="#">show chassis zones (MX2020 Router) on page 819</a> <a href="#">show chassis zones detail (MX2020 Router) on page 819</a> <a href="#">show chassis beacon interconnect-device (QFabric System) on page 820</a> <a href="#">show chassis beacon interconnect-device fpc (QFabric System) on page 821</a> <a href="#">show chassis beacon node-device (QFabric System) on page 821</a> <a href="#">show chassis beacon node-device fpc (QFabric System) on page 821</a>
<b>Output Fields</b>	<a href="#">Table 36 on page 419</a> lists the output fields for the <b>show chassis zones</b> command. Output fields are listed in the approximate order in which they appear.



Table 57: show chassis zones Output Fields

Field Name	Field Description
Slot	FPC slot number of the device whose content is being displayed. On QFX3500 standalone switches, the number is always 0.
Beacon State	Status of the beacon state: <ul style="list-style-type: none"> <li>Off—The beacon is <b>OFF</b>.</li> <li>On—The beacon is <b>ON</b>.</li> </ul>
show chassis zones command output fields for MX2020 and MX2010 routers:	
Driving FRU	Field replacable unit (FRU).
Temperature	Temperature of the specified FRU in degrees Celsius and degrees Fahrenheit.
Condition	Condition of the specified FRU. Condition can be <b>HIGH TEMP</b> , <b>WARM TEMP</b> , <b>OK</b> , and <b>Offline</b> .
Num Fans Missing	Number of fans or fan trays missing.
Num Fans Failed	Number of fans or fan trays that have failed.
Fan Duty Cycle	Fan duty cycle value.
show chassis zones detail command output fields for MX2020 and MX2010 routers:	
Item	Chassis component: <ul style="list-style-type: none"> <li>Information about the chassis, Routing Engines, Control Boards (CBs), Switch Fabric Boards (SFBs), PICs, Flexible PIC Concentrators (FPCs), and Adapter Cards (ADCs).</li> </ul>
Measurement	Fan tray speed utilization in percentage.
Status	Status of the specified item. Status can be <b>OK</b> , <b>Absent</b> , or <b>Offline</b> .



## Sample Output

**show chassis zones  
interconnect-device  
(QFabric System)**

```
user@switch> show chassis zones interconnect-device interconnect1
Slot          Beacon State
FPC           0          OFF
```

**show chassis zones  
(MX2010 Router)**

```
user@host> show chassis zones
ZONE 0 Status
  Driving FRU          FPC 6
  Temperature          81 degrees C / 177 degrees F
  Condition            HIGH TEMP
  Num Fans Missing     0
  Num Fans Failed      0
  Fan Duty Cycle       30

ZONE 1 Status
  Driving FRU          SFB 0 Exhaust-Zone1
  Temperature          71 degrees C / 159 degrees F
  Condition            WARM TEMP
  Num Fans Missing     0
  Num Fans Failed      0
  Fan Duty Cycle       30
```

**show chassis zones  
detail (MX2010  
Router)**

```
user@host > show chassis zones
ZONE 0 Status
Item          Status          Measurement
CB 0          WARM TEMP
CB 1          WARM TEMP
FPC 0         HIGH TEMP
FPC 1         HIGH TEMP
FPC 2         WARM TEMP
FPC 3         HIGH TEMP
FPC 4         HIGH TEMP
FPC 5         HIGH TEMP
FPC 6         HIGH TEMP
FPC 7         HIGH TEMP
FPC 8         HIGH TEMP
FPC 9         HIGH TEMP
ADC 0         WARM TEMP
ADC 1         WARM TEMP
ADC 2         WARM TEMP
ADC 3         WARM TEMP
ADC 4         WARM TEMP
ADC 5         WARM TEMP
ADC 6         WARM TEMP
ADC 7         WARM TEMP
ADC 8         WARM TEMP
ADC 9         WARM TEMP
SFB 0         WARM TEMP
SFB 1         WARM TEMP
SFB 2         WARM TEMP
SFB 3         Offline
SFB 4         HIGH TEMP
SFB 5         WARM TEMP
SFB 6         HIGH TEMP
SFB 7         WARM TEMP
Fan Tray 0    OK              Spinning at 98% fan tray speed
Fan Tray 1    OK              Spinning at 98% fan tray speed
```



```

ZONE 1 Status
Item              Status              Measurement
CB 0              WARM TEMP
CB 1              WARM TEMP
Routing Engine 0  OK
Routing Engine 1  OK
SFB 0             WARM TEMP
SFB 1             WARM TEMP
SFB 2             WARM TEMP
SFB 3             Offline
SFB 4             HIGH TEMP
SFB 5             WARM TEMP
SFB 6             HIGH TEMP
SFB 7             WARM TEMP
SPMB 0            OK
SPMB 1            OK
Fan Tray 2        OK                  Spinning at 64% fan tray speed
Fan Tray 3        OK                  Spinning at 64% fan tray speed

```

#### show chassis zones (MX2020 Router)

```

user@host> show chassis zones
ZONE 0 Status
  Driving FRU      FPC 0
  Temperature      31 degrees C / 87 degrees F
  Condition        OK
  Num Fans Missing 0
  Num Fans Failed  0
  Fan Duty Cycle   30

ZONE 1 Status
  Driving FRU      FPC 19
  Temperature      32 degrees C / 89 degrees F
  Condition        OK
  Num Fans Missing 0
  Num Fans Failed  0
  Fan Duty Cycle   30

```

#### show chassis zones detail (MX2020 Router)

```

user@host> show chassis zones detail
ZONE 0 Status
Item              Status              Measurement
CB 0              OK
CB 1              OK
FPC 0             OK
FPC 1             OK
FPC 2             OK
FPC 3             OK
FPC 4             OK
FPC 5             OK
FPC 6             OK
FPC 7             OK
FPC 8             OK
FPC 9             OK
ADC 0             OK
ADC 1             OK
ADC 2             OK
ADC 3             OK
ADC 4             OK
ADC 5             OK
ADC 6             OK
ADC 7             OK

```



ADC 8	OK	
ADC 9	OK	
SFB 0	OK	
SFB 1	OK	
SFB 2	OK	
SFB 3	OK	
SFB 4	OK	
SFB 5	OK	
SFB 6	OK	
SFB 7	OK	
Fan Tray 0	OK	Spinning at 38% fan tray speed
Fan Tray 1	OK	Spinning at 37% fan tray speed

## ZONE 1 Status

Item	Status	Measurement
CB 0	OK	
CB 1	OK	
Routing Engine 0	OK	
Routing Engine 1	OK	
FPC 10	OK	
FPC 11	OK	
FPC 12	OK	
FPC 13	OK	
FPC 14	OK	
FPC 15	OK	
FPC 16	OK	
FPC 17	OK	
FPC 18	OK	
FPC 19	OK	
ADC 10	OK	
ADC 11	OK	
ADC 12	OK	
ADC 13	OK	
ADC 14	OK	
ADC 15	OK	
ADC 16	OK	
ADC 17	OK	
ADC 18	OK	
ADC 19	OK	
SFB 0	OK	
SFB 1	OK	
SFB 2	OK	
SFB 3	OK	
SFB 4	OK	
SFB 5	OK	
SFB 6	OK	
SFB 7	OK	
SPMB 0	OK	
SPMB 1	OK	
Fan Tray 2	OK	Spinning at 38% fan tray speed
Fan Tray 3	OK	Spinning at 38% fan tray speed

**show chassis beacon  
interconnect-device  
(QFabric System)**

```

user@switch> show chassis beacon interconnect-device interconnect1
Chassis                OFF
CB 0                   OFF
CB 1                   OFF
FC 0 FPC 0             OFF
FC 1 FPC 1             OFF
RC 0 FPC 8             OFF
RC 1 FPC 9             OFF

```



**show chassis beacon  
interconnect-device  
fpc (QFabric System)**

```
user@switch> show chassis beacon interconnect-device interconnect1 fpc 0
FPC 0                                ON
```

**show chassis beacon  
node-device (QFabric  
System)**

```
user@switch> show chassis beacon node-device node1
node1                                ON
```

**show chassis beacon  
node-device fpc  
(QFabric System)**

```
user@switch> show chassis beacon node-device node1 fpc 0
FPC 0                                ON
```



## show cli

<b>Syntax</b>	show cli
<b>Syntax (QFX Series)</b>	show cli <authorization> <directory> <history <i>count</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display configured CLI settings.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show cli on page 823</a>
<b>Output Fields</b>	<a href="#">Table 58 on page 822</a> lists the output fields for the <b>show cli</b> command. Output fields are listed in the approximate order in which they appear.

**Table 58: show cli Output Fields**

Field Name	Field Description
CLI complete-on-space	Capability to complete a partial command entry when you type a space or a tab: <b>on</b> or <b>off</b> .
CLI idle-timeout	Maximum time that an individual session can be idle before the user is logged out from the router or switch. When this feature is enabled, the number of minutes is displayed. Otherwise, the state is <b>disabled</b> .
CLI restart-on-upgrade	CLI is set to prompt you to restart the router or switch after upgrading the software: <b>on</b> or <b>off</b> .
CLI screen-length	Number of lines of text that the terminal screen displays.
CLI screen-width	Number of characters in a line on the terminal screen.
CLI terminal	Terminal type.
CLI is operating in	Mode: <b>enhanced</b> .
CLI timestamp	Date and time format for the timestamp. If the timestamp is not set, the state is <b>disabled</b> .
CLI working directory	Pathname of the working directory.



## Sample Output

show cli

```
user@host> show cli
CLI complete-on-space set to on
CLI idle-timeout disabled
CLI restart-on-upgrade set to on
CLI screen-length set to 47
CLI screen-width set to 132
CLI terminal is 'vt100'
CLI is operating in enhanced mode
CLI timestamp disabled
CLI working directory is '/var/home/regress'
```



## show cli authorization

<b>Syntax</b>	show cli authorization
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the permissions for the current user.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show cli authorization on page 826</a>
<b>Output Fields</b>	<a href="#">Table 59 on page 824</a> lists the output fields for the <b>show cli authorization</b> command. In the table, all possible permissions are displayed and output fields are listed in alphabetical order.

**Table 59: show cli authorization Output Fields**

Field Name	Field Description
access	Can view access configuration information.
access-control	Can modify access configuration.
admin	Can view user account information.
admin-control	Can modify user account information.
clear	Can clear learned network information.
configure	Can enter configuration mode.
control	Can modify any configuration.
edit	Can edit configuration files.
field	Reserved for field (debugging) support.
firewall	Can view firewall configuration information.
firewall-control	Can modify firewall configuration information.
floppy	Can read from and write to removable media.
flow-tap	Can view flow-tap configuration information.



Table 59: show cli authorization Output Fields (*continued*)

Field Name	Field Description
<b>flow-tap-control</b>	Can configure flow-tap configuration information.
<b>idp-profiler-operation</b>	Can configure Profiler data.
<b>interface</b>	Can view interface configuration information.
<b>interface-control</b>	Can modify interface configuration information.
<b>maintenance</b>	Can perform system maintenance.
<b>network</b>	Can access the network by entering the <b>ping</b> , <b>ssh</b> , <b>telnet</b> , and <b>traceroute</b> commands.
<b>pgcp-session-mirroring</b>	Can view Packet Gateway Control Protocol session mirroring configuration.
<b>pgcp-session-mirroring-control</b>	Can modify Packet Gateway Control Protocol session mirroring configuration all-control.
<b>reset</b>	Can reset or restart interfaces and system processes.
<b>rollback</b>	Can roll back to previous configurations.
<b>routing</b>	Can view routing configuration information.
<b>routing-control</b>	Can modify routing configuration information.
<b>secret</b>	Can view passwords and authentication keys in the configuration.
<b>secret-control</b>	Can modify passwords and authentication keys in the configuration.
<b>security</b>	Can view security configuration information.
<b>security-control</b>	Can modify security configuration information.
<b>shell</b>	Can start a local shell.
<b>snmp</b>	Can view SNMP configuration information.
<b>snmp-control</b>	Can modify SNMP configuration information.
<b>system</b>	Can view system configuration information.
<b>system-control</b>	Can modify system configuration information.
<b>trace</b>	Can view trace file settings information.



Table 59: show cli authorization Output Fields (*continued*)

Field Name	Field Description
<b>trace-control</b>	Can modify trace file settings information.
<b>view</b>	Can view current values and statistics.
<b>view-configuration</b>	Can view all configuration information (not including secrets).

## Sample Output

### show cli authorization

```

user@host> show cli authorization
Current user: 'remote' login: 'user' class ''
Permissions:
  admin      -- Can view user accounts
  admin-control-- Can modify user accounts
  clear      -- Can clear learned network information
  configure  -- Can enter configuration mode
  control    -- Can modify any configuration
  edit       -- Can edit full files
  field      -- Special for field (debug) support
  floppy     -- Can read and write from the floppy
  interface  -- Can view interface configuration
  interface-control-- Can modify interface configuration
  network    -- Can access the network
  reset      -- Can reset/restart interfaces and daemons
  routing    -- Can view routing configuration
  routing-control-- Can modify routing configuration
  shell      -- Can start a local shell
  snmp       -- Can view SNMP configuration
  snmp-control-- Can modify SNMP configuration
  system     -- Can view system configuration
  system-control-- Can modify system configuration
  trace      -- Can view trace file settings
  trace-control-- Can modify trace file settings
  view       -- Can view current values and statistics
  maintenance -- Can become the super-user
  firewall   -- Can view firewall configuration
  firewall-control-- Can modify firewall configuration
  secret     -- Can view secret configuration
  secret-control-- Can modify secret configuration
  rollback   -- Can rollback to previous configurations
  security   -- Can view security configuration
  security-control-- Can modify security configuration
  access     -- Can view access configuration
  access-control-- Can modify access configuration
  view-configuration-- Can view all configuration (not including secrets)
  flow-tap   -- Can view flow-tap configuration
  flow-tap-control-- Can configure flow-tap service
Individual command authorization:
  Allow regular expression: none
  Deny regular expression: none
  Allow configuration regular expression: none
  Deny configuration regular expression: none

```



---

## show cli directory

---

<b>Syntax</b>	show cli directory
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the current working directory.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show cli directory on page 827</a>
<b>Output Fields</b>	<a href="#">Table 60 on page 827</a> lists the output fields for the <b>show cli directory</b> command. Output fields are listed in the approximate order in which they appear.

**Table 60: show cli directory Output Fields**

Field Name	Field Description
<b>Current directory</b>	Pathname of the current working directory.

---

## Sample Output

<b>show cli directory</b>	user@host> show cli directory Current directory: /var/home/regress
---------------------------	---



## show cli history

<b>Syntax</b>	<code>show cli history</code> <code>&lt;count&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display a list of previous CLI commands.
<b>Options</b>	<b>none</b> —Display all previous CLI commands.  <b>count</b> —(Optional) Maximum number of commands to display.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show cli history on page 828</a>
<b>Output Fields</b>	<a href="#">Table 61 on page 828</a> lists the output fields for the <b>show cli history</b> command. Output fields are listed in the approximate order in which they appear.

**Table 61: show cli history Output Fields**

Field Name	Field Description
<i>timestamp</i>	Time at which the command was entered.
<i>command-syntax</i>	Command that was entered.

## Sample Output

```

show cli history
user@host> show cli history
11:14:14 -- show arp
11:22:10 -- show cli authorization
11:27:12 -- show cli history

```



---

## show host

---

<b>Syntax</b>	<code>show host <i>hostname</i></code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Domain Name System (DNS) hostname information.
<b>Options</b>	<i>hostname</i> —Hostname or address.
<b>Additional Information</b>	The <code>show host</code> command displays the raw data received from the DNS server.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show host on page 829</a>

### Sample Output

```
show host
user@host> show host snark
snark.boojum.net has address 192.168.1.254

user@host> show host 192.168.1.254
Name: snark.boojum.net
Address: 192.168.1.254
Aliases:
```



## show interfaces diagnostics optics

<b>Syntax</b>	<code>show interfaces diagnostics optics <i>interface-name</i></code>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Display diagnostics data and alarms for Gigabit Ethernet, 10-Gigabit Ethernet, and QSFP+ optical transceivers installed in a QFX Series product. The information provided by this command is known as digital optical monitoring (DOM) information.</p> <p>Thresholds that trigger a high alarm, low alarm, high warning, or low warning are set by the transponder vendors. Generally, a high alarm or low alarm indicates that the optics module is not operating properly. This information can be used to diagnose why a transceiver is not working.</p>
<b>Options</b>	<i>interface-name</i> —Name of the interface associated with the port in which the transceiver is installed.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Monitoring Interface Status and Traffic on page 279</a></li> <li>• Installing a Transceiver in a QFX Series Device</li> <li>• Removing a Transceiver from a QFX Series Device</li> <li>• Junos® OS Network Interfaces</li> </ul>
<b>List of Sample Output</b>	<a href="#">show interfaces diagnostics optics xe-0/0/1 (SFP+ Transceiver) on page 834</a> <a href="#">show interfaces diagnostics optics node1:xe-0/0/1 (SFP+ Transceiver) on page 835</a>
<b>Output Fields</b>	lists the output fields for the <code>show interfaces diagnostics optics</code> command. Output fields are listed in the approximate order in which they appear.

**Table 62: show interfaces diagnostics optics Output Fields**

Field Name	Field Description
Physical interface	Displays the name of the physical interface.
Laser bias current	Displays the magnitude of the laser bias power setting current, in milliamperes. The laser bias provides direct modulation of laser diodes and modulates currents.
Laser output power	Displays the laser output power, in milliwatts (mW) and decibels referred to 1.0 mW (dBm).
Module temperature	Displays the temperature, in Celsius and Fahrenheit.
Module voltage	Displays the voltage, in volts.
(Not available for XFP transceivers)	



Table 62: show interfaces diagnostics optics Output Fields (*continued*)

Field Name	Field Description
<b>Laser rx power</b> (Not available for SFP and SFP+ transceivers)	Displays the laser received optical power, in milliwatts (mW) and decibels referred to 1.0 mW (dBm).
<b>Receiver signal average optical power</b> (Not available for XFP transceivers)	Displays the receiver signal average optical power, in milliwatts (mW) and decibels referred to 1.0 mW (dBm).
<b>Laser bias current high alarm</b>	Displays whether the laser bias power setting high alarm is <b>On</b> or <b>Off</b> .
<b>Laser bias current low alarm</b>	Displays whether the laser bias power setting low alarm is <b>On</b> or <b>Off</b> .
<b>Laser bias current high warning</b>	Displays whether the laser bias power setting high warning is <b>On</b> or <b>Off</b> .
<b>Laser bias current low warning</b>	Displays whether the laser bias power setting low warning is <b>On</b> or <b>Off</b> .
<b>Laser output power high alarm</b>	Displays whether the laser output power high alarm is <b>On</b> or <b>Off</b> .
<b>Laser output power low alarm</b>	Displays whether the laser output power low alarm is <b>On</b> or <b>Off</b> .
<b>Laser output power high warning</b>	Displays whether the laser output power high warning is <b>On</b> or <b>Off</b> .
<b>Laser output power low warning</b>	Displays whether the laser output power low warning is <b>On</b> or <b>Off</b> .
<b>Module temperature high alarm</b>	Displays whether the module temperature high alarm is <b>On</b> or <b>Off</b> .
<b>Module temperature low alarm</b>	Displays whether the module temperature low alarm is <b>On</b> or <b>Off</b> .
<b>Module temperature high warning</b>	Displays whether the module temperature high warning is <b>On</b> or <b>Off</b> .
<b>Module temperature low warning</b>	Displays whether the module temperature low warning is <b>On</b> or <b>Off</b> .
<b>Module voltage high alarm</b> (Not available for XFP transceivers)	Displays whether the module voltage high alarm is <b>On</b> or <b>Off</b> .
<b>Module voltage low alarm</b> (Not available for XFP transceivers)	Displays whether the module voltage low alarm is <b>On</b> or <b>Off</b> .
<b>Module voltage high warning</b> (Not available for XFP transceivers)	Displays whether the module voltage high warning is <b>On</b> or <b>Off</b> .
<b>Module voltage low warning</b> (Not available for XFP transceivers)	Displays whether the module voltage low warning is <b>On</b> or <b>Off</b> .
<b>Laser rx power high alarm</b>	Displays whether the receive laser power high alarm is <b>On</b> or <b>Off</b> .



Table 62: show interfaces diagnostics optics Output Fields (*continued*)

Field Name	Field Description
Laser rx power low alarm	Displays whether the receive laser power low alarm is <b>On</b> or <b>Off</b> .
Laser rx power high warning	Displays whether the receive laser power high warning is <b>On</b> or <b>Off</b> .
Laser rx power low warning	Displays whether the receive laser power low warning is <b>On</b> or <b>Off</b> .
Laser bias current high alarm threshold	Displays the vendor-specified threshold for the laser bias current high alarm.
Module not ready alarm (Not available for SFP and SFP+ transceivers)	Displays whether the module not ready alarm is <b>On</b> or <b>Off</b> . When the output is <b>On</b> , the module has an operational fault.
Module power down alarm (Not available for SFP and SFP+ transceivers)	Displays whether the module power down alarm is <b>On</b> or <b>Off</b> . When the output is <b>On</b> , the module is in a limited power mode, low for normal operation.
Tx data not ready alarm (Not available for SFP and SFP+ transceivers)	Any condition leading to invalid data on the transmit path. Displays whether the Tx data not ready alarm is <b>On</b> or <b>Off</b> .
Tx not ready alarm (Not available for SFP and SFP+ transceivers)	Any condition leading to invalid data on the transmit path. Displays whether the Tx not ready alarm is <b>On</b> or <b>Off</b> .
Tx laser fault alarm (Not available for SFP and SFP+ transceivers)	Laser fault condition. Displays whether the Tx laser fault alarm is <b>On</b> or <b>Off</b> .
Tx CDR loss of lock alarm (Not available for SFP and SFP+ transceivers)	Transmit clock and data recovery (CDR) loss of lock. Loss of lock on the transmit side of the CDR. Displays whether the Tx CDR loss of lock alarm is <b>On</b> or <b>Off</b> .
Rx not ready alarm (Not available for SFP and SFP+ transceivers)	Any condition leading to invalid data on the receive path. Displays whether the Rx not ready alarm is <b>On</b> or <b>Off</b> .
Rx loss of signal alarm (Not available for SFP and SFP+ transceivers)	Receive loss of signal alarm. When <b>on</b> , indicates insufficient optical input power to the module. Displays whether the Rx loss of signal alarm is <b>On</b> or <b>Off</b> .
Rx CDR loss of lock alarm (Not available for SFP and SFP+ transceivers)	Receive CDR loss of lock. Loss of lock on the receive side of the CDR. Displays whether the Rx CDR loss of lock alarm is <b>On</b> or <b>Off</b> .
Laser bias current low alarm threshold	Displays the vendor-specified threshold for the laser bias current low alarm.
Laser bias current high warning threshold	Displays the vendor-specified threshold for the laser bias current high warning.



Table 62: show interfaces diagnostics optics Output Fields (*continued*)

Field Name	Field Description
Laser bias current low warning threshold	Displays the vendor-specified threshold for the laser bias current low warning.
Laser output power high alarm threshold	Displays the vendor-specified threshold for the laser output power high alarm.
Laser output power low alarm threshold	Displays the vendor-specified threshold for the laser output power low alarm.
Laser output power high warning threshold	Displays the vendor-specified threshold for the laser output power high warning.
Laser output power low warning threshold	Displays the vendor-specified threshold for the laser output power low warning.
Module temperature high alarm threshold	Displays the vendor-specified threshold for the module temperature high alarm.
Module temperature low alarm threshold	Displays the vendor-specified threshold for the module temperature low alarm.
Module temperature high warning threshold	Displays the vendor-specified threshold for the module temperature high warning.
Module temperature low warning threshold	Displays the vendor-specified threshold for the module temperature low warning.
Module voltage high alarm threshold (Not available for XFP transceivers)	Displays the vendor-specified threshold for the module voltage high alarm.
Module voltage low alarm threshold (Not available for XFP transceivers)	Displays the vendor-specified threshold for the module voltage low alarm.
Module voltage high warning threshold (Not available for XFP transceivers)	Displays the vendor-specified threshold for the module voltage high warning.
Module voltage low warning threshold (Not available for XFP transceivers)	Displays the vendor-specified threshold for the module voltage low warning.
Laser rx power high alarm threshold	Displays the vendor-specified threshold for the laser Rx power high alarm.
Laser rx power low alarm threshold	Displays the vendor-specified threshold for the laser Rx power low alarm.
Laser rx power high warning threshold	Displays the vendor-specified threshold for the laser Rx power high warning.



Table 62: show interfaces diagnostics optics Output Fields (*continued*)

Field Name	Field Description
Laser rx power low warning threshold	Displays the vendor-specified threshold for the laser Rx power low warning.

## Sample Output

show interfaces  
diagnostics optics

```
user@host> show interfaces diagnostics optics xe-0/0/1
Physical interface: xe-0/0/1
  Laser bias current           : 4.968 mA
```



xe-0/0/1  
(SFP+ Transceiver)

```

Laser output power           : 0.4940 mW / -3.06 dBm
Module temperature           : 27 degrees C / 81 degrees F
Module voltage                : 3.2310 V
Receiver signal average optical power : 0.0000
Laser bias current high alarm : Off
Laser bias current low alarm  : Off
Laser bias current high warning : Off
Laser bias current low warning : Off
Laser output power high alarm : Off
Laser output power low alarm  : Off
Laser output power high warning : Off
Laser output power low warning : Off
Module temperature high alarm  : Off
Module temperature low alarm   : Off
Module temperature high warning : Off
Module temperature low warning : Off
Module voltage high alarm      : Off
Module voltage low alarm       : Off
Module voltage high warning    : Off
Module voltage low warning     : Off
Laser rx power high alarm      : Off
Laser rx power low alarm       : On
Laser rx power high warning    : Off
Laser rx power low warning     : On
Laser bias current high alarm threshold : 10.500 mA
Laser bias current low alarm threshold : 2.000 mA
Laser bias current high warning threshold : 9.000 mA
Laser bias current low warning threshold : 2.500 mA
Laser output power high alarm threshold : 1.4120 mW / 1.50 dBm
Laser output power low alarm threshold : 0.0740 mW / -11.31 dBm
Laser output power high warning threshold : 0.7070 mW / -1.51 dBm
Laser output power low warning threshold : 0.1860 mW / -7.30 dBm
Module temperature high alarm threshold : 75 degrees C / 167 degrees F
Module temperature low alarm threshold : -5 degrees C / 23 degrees F
Module temperature high warning threshold : 70 degrees C / 158 degrees F
Module temperature low warning threshold : 0 degrees C / 32 degrees F
Module voltage high alarm threshold : 3.630 V
Module voltage low alarm threshold : 2.970 V
Module voltage high warning threshold : 3.465 V
Module voltage low warning threshold : 3.135 V
Laser rx power high alarm threshold : 1.5849 mW / 2.00 dBm
Laser rx power low alarm threshold : 0.0407 mW / -13.90 dBm
Laser rx power high warning threshold : 0.7943 mW / -1.00 dBm
Laser rx power low warning threshold : 0.1023 mW / -9.90 dBm

```

show interfaces  
diagnostics optics

```

user@host> show interfaces diagnostics optics node1:xe-0/0/1
Physical interface: node1:xe-0/0/1
Laser bias current           : 4.968 mA

```



node1:xe-0/0/1  
(SFP+ Transceiver)

```

Laser output power           : 0.4940 mW / -3.06 dBm
Module temperature           : 27 degrees C / 81 degrees F
Module voltage                : 3.2310 V
Receiver signal average optical power : 0.0000
Laser bias current high alarm : Off
Laser bias current low alarm  : Off
Laser bias current high warning : Off
Laser bias current low warning : Off
Laser output power high alarm : Off
Laser output power low alarm  : Off
Laser output power high warning : Off
Laser output power low warning : Off
Module temperature high alarm  : Off
Module temperature low alarm   : Off
Module temperature high warning : Off
Module temperature low warning : Off
Module voltage high alarm      : Off
Module voltage low alarm       : Off
Module voltage high warning    : Off
Module voltage low warning     : Off
Laser rx power high alarm      : Off
Laser rx power low alarm       : On
Laser rx power high warning    : Off
Laser rx power low warning     : On
Laser bias current high alarm threshold : 10.500 mA
Laser bias current low alarm threshold : 2.000 mA
Laser bias current high warning threshold : 9.000 mA
Laser bias current low warning threshold : 2.500 mA
Laser output power high alarm threshold : 1.4120 mW / 1.50 dBm
Laser output power low alarm threshold : 0.0740 mW / -11.31 dBm
Laser output power high warning threshold : 0.7070 mW / -1.51 dBm
Laser output power low warning threshold : 0.1860 mW / -7.30 dBm
Module temperature high alarm threshold : 75 degrees C / 167 degrees F
Module temperature low alarm threshold : -5 degrees C / 23 degrees F
Module temperature high warning threshold : 70 degrees C / 158 degrees F
Module temperature low warning threshold : 0 degrees C / 32 degrees F
Module voltage high alarm threshold : 3.630 V
Module voltage low alarm threshold : 2.970 V
Module voltage high warning threshold : 3.465 V
Module voltage low warning threshold : 3.135 V
Laser rx power high alarm threshold : 1.5849 mW / 2.00 dBm
Laser rx power low alarm threshold : 0.0407 mW / -13.90 dBm
Laser rx power high warning threshold : 0.7943 mW / -1.00 dBm
Laser rx power low warning threshold : 0.1023 mW / -9.90 dBm

```



## show log

---

<b>Syntax</b>	show log <filename   user <username>>
<b>Syntax (QFabric System)</b>	show log <filename>
<b>Syntax (TX Matrix Routers)</b>	show log <all-lcc   lcc <i>number</i>   scc> <filename   user <username>>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	List log files, display log file contents, or display information about users who have logged in to the router or switch.
<b>Options</b>	<p><b>none</b>—List all log files.</p> <p><b>&lt;all-lcc   lcc <i>number</i>   scc&gt;</b>—(TX Matrix routers only) (Optional) Display logging information about all T640 routers (or line-card chassis) or a specific T640 router (replace <i>number</i> with a value from <b>0</b> through <b>3</b>) connected to a TX Matrix router. Or, display logging information about the TX Matrix router (or switch-card chassis).</p> <p><b>filename</b>—(Optional) Display the log messages in the specified log file. For the routing matrix, the filename must include the chassis information.</p> <p><b>user &lt;username&gt;</b>—(Optional) Display logging information about users who have recently logged in to the router or switch. If you include <i>username</i>, display logging information about the specified user.</p>
<b>Required Privilege Level</b>	trace
<b>List of Sample Output</b>	<a href="#">show log on page 838</a> <a href="#">show log filename on page 838</a> <a href="#">show log filename (QFabric System) on page 838</a> <a href="#">show log user on page 839</a>



## Sample Output

### show log

```
user@host> show log
total 57518
-rw-r--r-- 1 root bin      211663 Oct  1 19:44 dcd
-rw-r--r-- 1 root bin      999947 Oct  1 19:41 dcd.0
-rw-r--r-- 1 root bin      999994 Oct  1 17:48 dcd.1
-rw-r--r-- 1 root bin      238815 Oct  1 19:44 rpd
-rw-r--r-- 1 root bin     1049098 Oct  1 18:00 rpd.0
-rw-r--r-- 1 root bin     1061095 Oct  1 12:13 rpd.1
-rw-r--r-- 1 root bin     1052026 Oct  1 06:08 rpd.2
-rw-r--r-- 1 root bin     1056309 Sep 30 18:21 rpd.3
-rw-r--r-- 1 root bin     1056371 Sep 30 14:36 rpd.4
-rw-r--r-- 1 root bin     1056301 Sep 30 10:50 rpd.5
-rw-r--r-- 1 root bin     1056350 Sep 30 07:04 rpd.6
-rw-r--r-- 1 root bin     1048876 Sep 30 03:21 rpd.7
-rw-rw-r-- 1 root bin       19656 Oct  1 19:37 wtmp
```

### show log filename

```
user@host> show log rpd
Oct  1 18:00:18 trace_on: Tracing to ?/var/log/rpd? started
Oct  1 18:00:18 EVENT <MTU> ds-5/2/0.0 index 24 <Broadcast PointToPoint Multicast
Oct  1 18:00:18
Oct  1 18:00:19 KRT recv len 56 V9 seq 148 op add Type route/if af 2 addr
13.13.13.21 nhop type local nhop 13.13.13.21
Oct  1 18:00:19 KRT recv len 56 V9 seq 149 op add Type route/if af 2 addr
13.13.13.22 nhop type unicast nhop 13.13.13.22
Oct  1 18:00:19 KRT recv len 48 V9 seq 150 op add Type ifaddr index 24 devindex
43
Oct  1 18:00:19 KRT recv len 144 V9 seq 151 op chnge Type ifdev devindex 44
Oct  1 18:00:19 KRT recv len 144 V9 seq 152 op chnge Type ifdev devindex 45
Oct  1 18:00:19 KRT recv len 144 V9 seq 153 op chnge Type ifdev devindex 46
Oct  1 18:00:19 KRT recv len 1272 V9 seq 154 op chnge Type ifdev devindex 47
...
```

### show log filename (QFabric System)

```
user@qfabric> show log messages
Mar 28 18:00:06 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:06 ED1486
chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 1, jnxFruL3Index 0,
jnxFruName PIC: 48x 10G-SFP+ @ 0/0/*, jnxFruType 11, jnxFruSlot 0,
jnxFruOfflineReason 2, jnxFruLastPowerOff 0, jnxFruLastPowerOn 2159)
Mar 28 18:00:07 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:07 ED1486
chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 2, jnxFruL3Index 0,
jnxFruName PIC: @ 0/1/*, jnxFruType 11, jnxFruSlot 0, jnxFruOfflineReason 2,
jnxFruLastPowerOff 0, jnxFruLastPowerOn 2191)
Mar 28 18:00:07 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:07 ED1492
chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 1, jnxFruL3Index 0,
jnxFruName PIC: 48x 10G-SFP+ @ 0/0/*, jnxFruType 11, jnxFruSlot 0,
jnxFruOfflineReason 2, jnxFruLastPowerOff 0, jnxFruLastPowerOn 242726)
Mar 28 18:00:07 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:07 ED1492
chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 2, jnxFruL3Index 0,
jnxFruName PIC: @ 0/1/*, jnxFruType 11, jnxFruSlot 0, jnxFruOfflineReason 2,
jnxFruLastPowerOff 0, jnxFruLastPowerOn 242757)
Mar 28 18:00:16 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:16 ED1486
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:00:27 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:27 ED1486
```



```

file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:00:50 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:50
_DCF_default__NW-INE-0_RE0_ file: UI_COMMIT: User 'root' requested 'commit'
operation (comment: none)
Mar 28 18:00:50 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:50
_DCF_default__NW-INE-0_RE0_ file: UI_COMMIT: User 'root' requested 'commit'
operation (comment: none)
Mar 28 18:00:55 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:55 ED1492
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:01:10 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:01:10 ED1492
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:02:37 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:02:37 ED1491
chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 1, jnxFruL3Index 0,
jnxFruName PIC: 48x 10G-SFP+ @ 0/0/*, jnxFruType 11, jnxFruSlot 0,
jnxFruOfflineReason 2, jnxFruLastPowerOff 0, jnxFruLastPowerOn 33809)

```

### show log user

```

user@host> show log user
darius  mg2546                Thu Oct  1 19:37   still logged in
darius  mg2529                Thu Oct  1 19:08 - 19:36   (00:28)
darius  mg2518                Thu Oct  1 18:53 - 18:58   (00:04)
root    mg1575                Wed Sep 30 18:39 - 18:41   (00:02)
root    ttyp2      jun.site.per    Wed Sep 30 18:39 - 18:41   (00:02)
alex    ttyp1      192.168.1.2    Wed Sep 30 01:03 - 01:22   (00:19)

```



## show ntp associations

<b>Syntax</b>	<code>show ntp associations</code> <code>&lt;no-resolve&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Network Time Protocol (NTP) peers and their state.
<b>Options</b>	<b>none</b> —Display NTP peers and their state. <b>no-resolve</b> —(Optional) Suppress symbolic addressing.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><a href="#">show ntp status on page 842</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show ntp associations on page 841</a>
<b>Output Fields</b>	<a href="#">Table 63 on page 840</a> describes the output fields for the <b>show ntp associations</b> command. Output fields are listed in the approximate order in which they appear.

**Table 63: show ntp associations Output Fields**

Field Name	Field Description
<b>remote</b>	Address or name of the remote NTP peer.
<b>refid</b>	Reference identifier of the remote peer. If the reference identifier is not known, this field shows a value of <b>0.0.0.0</b> .
<b>st</b>	Stratum of the remote peer.
<b>t</b>	Type of peer: <b>b</b> (broadcast), <b>l</b> (local), <b>m</b> (multicast), or <b>u</b> (unicast).
<b>when</b>	When the last packet from the peer was received.
<b>poll</b>	Polling interval, in seconds.
<b>reach</b>	Reachability register, in octal.
<b>delay</b>	Current estimated delay of the peer, in milliseconds.
<b>offset</b>	Current estimated offset of the peer, in milliseconds.
<b>disp</b>	Current estimated dispersion of the peer, in milliseconds.



Table 63: show ntp associations Output Fields (*continued*)

Field Name	Field Description
<i>peer-name</i>	<p>Peer name and status of the peer in the clock selection process:</p> <ul style="list-style-type: none"> <li>• space—Discarded because of a high stratum value or failed sanity checks.</li> <li>• x—Designated "falseticker" by the intersection algorithm.</li> <li>• .—Culled from the end of the candidate list.</li> <li>• — —Discarded by the clustering algorithm.</li> <li>• +—Included in the final selection set.</li> <li>• #—Selected for synchronization, but the distance exceeds the maximum.</li> <li>• *—Selected for synchronization.</li> <li>• o—Selected for synchronization, but the packets-per-second (pps) signal is in use.</li> </ul>

## Sample Output

```

show ntp associations  user@host> show ntp associations
                      remote          refid      st t when poll reach  delay  offset  disp
=====
*wolfe-gw.junipe tick.ucla.edu      2 u  43  64  377    1.86    0.319    0.08

```



## show ntp status

<b>Syntax</b>	<code>show ntp status</code> <code>&lt;no-resolve&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the values of internal variables returned by Network Time Protocol (NTP) peers.
<b>Options</b>	<b>none</b> —Display the values of internal variables returned by NTP peers.  <b>no-resolve</b> —(Optional) Suppress symbolic addressing.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show ntp associations on page 840</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show ntp status on page 843</a>
<b>Output Fields</b>	<a href="#">Table 64 on page 842</a> describes the output fields for the <b>show ntp status</b> command. Output fields are listed in the approximate order in which they appear.

**Table 64: show ntp status Output Fields**

Field Name	Field Description
<b>status</b>	System status word, a code representing the status items listed.
<b>leap_none</b>	Indicates a normal synchronized state with no leap seconds imminent. Other options could be <b>leap_add_sec</b> , <b>leap_del_sec</b> , or <b>leap_alarm</b> , indicating a leap second will be added, deleted, or a leap second requirement is upcoming.
<b>sync_ntp</b>	Indicates the current synchronization source, in this case, an NTP server. Other options include <b>sync_alarm</b> and <b>sync_unspec</b> , both indicating that the router has not been synched.
<b>x events</b>	Indicates the number of events that have occurred since that last code change. An event is often the receipt of an NTP polling message.
<b>event_peer/strat_chg</b>	Describes the most recent event, in this case, the stratum of the peer server changed.
<b>version</b>	A detailed description of the version of NTP being used.
<b>processor</b>	Indicates the current hardware platform and version of the processor.
<b>system</b>	Detailed description of the name and version of the operating system in use.
<b>leap</b>	The number of leap seconds in use.



Table 64: show ntp status Output Fields (*continued*)

Field Name	Field Description
<b>stratum</b>	The stratum of the peer server. Anything greater than 1 is a secondary reference source, and the number roughly represents the number of hops away from the stratum 1 server.. Stratum 1 is a primary reference, such as an atomic clock.
<b>precision</b>	The precision of the peer clock, how precisely the frequency and time can be maintained with this particular timekeeping system.
<b>rootdelay</b>	The total roundtrip delay to the primary reference source, in seconds.
<b>rootdispersion</b>	The maximum error relative to the primary reference source, in seconds.
<b>peer</b>	An identification number of the peer in use.
<b>refid</b>	Reference identifier of the remote peer. If the reference identifier is not known, this field shows a value of 0.0.0.0.
<b>reftime</b>	The local time, in timestamp format, when the local clock was last updated. If the local clock has never been synchronized, the value is zero.
<b>poll</b>	The NTP broadcast message polling interval, in seconds.
<b>clock</b>	The current time on the local router clock.
<b>state</b>	The current mode of NTP operation, where 1 is symmetric active, 2 is symmetric passive, 3 is client, 4 is server, and 5 is broadcast.
<b>offset</b>	Current estimated offset of the peer, in milliseconds. Indicates the time difference between the reference clock and the local clock.
<b>frequency</b>	The frequency of the clock.
<b>jitter</b>	Indicates the magnitude of jitter, in milliseconds, between several time queries.
<b>stability</b>	A measure of how well this clock can maintain a constant frequency.

## Sample Output

### show ntp status

```

user@host> show ntp status
assID=0 status=0544 leap_none, sync_local_proto, 4 events, event_peer/strat_chg,
version="ntpd 4.2.2p1@1.1570-o Tue May 19 13:57:55 UTC 2009 (1)",
processor="x86_64", system="Linux/2.6.18-164.el5", leap=00, stratum=4,
precision=-10, rootdelay=0.000, rootdispersion=11.974, peer=59475,
refid=LOCAL(0),
reftime=d495c32c.0e71eaf2 Mon, Jan 7 2013 13:57:00.056, poll=10,
clock=d495c32c.cebd43bd Mon, Jan 7 2013 13:57:00.807, state=4,
offset=0.000, frequency=0.000, jitter=0.977, noise=0.977,
stability=0.000, tai=0

```



## show subscribers

---

**Syntax**    `show subscribers`  
              `<detail | extensive | terse>`  
              `<aci-interface-set-name aci-interface-set-name>`  
              `<address address>`  
              `<agent-circuit-identifier agent-circuit-identifier-substring>`  
              `<client-type client-type>`  
              `<count>`  
              `<interface interface>`  
              `<logical-system logical-system>`  
              `<mac-address mac-address>`  
              `<physical-interface physical-interface-name>`  
              `<profile-name profile-name>`  
              `<routing-instance routing-instance>`  
              `<stacked-vlan-id stacked-vlan-id>`  
              `<subscriber-state subscriber-state>`  
              `<user-name user-name>`  
              `<vlan-id vlan-id>`

**Release Information**    Command introduced in Junos OS Release 9.3.  
                              Command introduced in Junos OS Release 9.3 for EX Series switches.  
                              **client-type**, **mac-address**, **subscriber-state**, and **extensive** options introduced in Junos OS Release 10.2.  
                              **count** option usage with other options introduced in Junos OS Release 10.2.  
                              Command introduced in Junos OS Release 11.1 for the QFX Series.  
                              Options **aci-interface-set-name** and **agent-circuit-identifier** introduced in Junos OS Release 12.2.  
                              The **physical-interface** and **user-name** options introduced in Junos OS Release 12.3.

**Description**            Display information for active subscribers.

**Options**                **detail | extensive | terse**—(Optional) Display the specified level of output.

**aci-interface-set-name**—(Optional) Display all dynamic subscriber sessions that use the specified agent circuit identifier (ACI) interface set. Use the ACI interface set name generated by the router, such as `aci-1003-ge-1/0/0.4001`, and not the actual ACI value found in the DHCP or PPPoE control packets.

**address**—(Optional) Display subscribers whose IP address matches the specified address. You must specify the IPv4 or IPv6 address prefix without a netmask (for example, `192.168.17.1`). If you specify the IP address as a prefix with a netmask (for example, `192.168.17.1/32`), the router displays a message that the IP address is invalid, and rejects the command.

**agent-circuit-identifier-substring**—(Optional) Display all dynamic subscriber sessions whose ACI value matches the specified substring.

**client-type**—(Optional) Display subscribers whose client type matches the specified client type (DHCP, L2TP, PPP, PPPOE, VLAN, or static).



**count**—(Optional) Display the count of total subscribers and active subscribers for any specified option. You can use the **count** option alone or with the **address**, **client-type**, **interface**, **logical-system**, **mac-address**, **profile-name**, **routing-instance**, **stacked-vlan-id**, **subscriber-state**, or **vlan-id** options.

**id**—(Optional) Display a specific subscriber session whose session id matches the specified subscriber ID. You can display subscriber IDs by using the **show subscribers extensive** or the **show subscribers interface extensive** commands.

**interface**—(Optional) Display subscribers whose interface matches the specified interface.

**logical-system**—(Optional) Display subscribers whose logical system matches the specified logical system.

**mac-address**—(Optional) Display subscribers whose MAC address matches the specified MAC address.

**physical-interface-name**—(M120, M320, and MX Series routers only) (Optional) Display subscribers whose physical interface matches the specified physical interface.

**profile-name**—(Optional) Display subscribers whose dynamic profile matches the specified profile name.

**routing-instance**—(Optional) Display subscribers whose routing instance matches the specified routing instance.

**subscriber-state**—(Optional) Display subscribers whose subscriber state matches the specified subscriber state (ACTIVE, CONFIGURED, INIT, TERMINATED, or TERMINATING).

**user-name**—(M120, M320, and MX Series routers only) (Optional) Display subscribers whose username matches the specified subscriber name.

**vlan-id**—(Optional) Display subscribers whose VLAN ID matches the specified VLAN ID.

**stacked-vlan-id**—(Optional) Display subscribers whose stacked VLAN ID matches the specified stacked VLAN ID.



**NOTE:** Due to display limitations, logical system and routing instance output values are truncated when necessary.

**Required Privilege Level**

view

**Related Documentation**

- [show subscribers summary](#)
- [Verifying and Managing Agent Circuit Identifier-Based Dynamic VLAN Configuration](#)

**List of Sample Output**

[show subscribers \(IPv4\) on page 850](#)  
[show subscribers \(IPv6\) on page 850](#)



[show subscribers \(IPv4 and IPv6 Dual Stack\) on page 850](#)  
[show subscribers \(LNS on MX Series Routers\) on page 850](#)  
[show subscribers client-type dhcp detail on page 850](#)  
[show subscribers count on page 851](#)  
[show subscribers address detail \(IPv6\) on page 851](#)  
[show subscribers detail \(IPv4\) on page 851](#)  
[show subscribers detail \(IPv6\) on page 851](#)  
[show subscribers detail \(IPv6 Static Demux Interface\) on page 852](#)  
[show subscribers detail \(L2TP LNS Subscribers on MX Series Routers\) on page 852](#)  
[show subscribers detail \(Tunneled Subscriber\) on page 853](#)  
[show subscribers detail \(IPv4 and IPv6 Dual Stack\) on page 853](#)  
[show subscribers detail \(ACI Interface Set Session\) on page 854](#)  
[show subscribers detail \(PPPoE Subscriber Session with ACI Interface Set\) on page 854](#)  
[show subscribers extensive on page 855](#)  
[show subscribers extensive \(RPF Check Fail Filter\) on page 855](#)  
[show subscribers extensive \(L2TP LNS Subscribers on MX Series Routers\) on page 855](#)  
[show subscribers extensive \(IPv4 and IPv6 Dual Stack\) on page 856](#)  
[show subscribers aci-interface-set-name detail \(Subscriber Sessions Using Specified ACI Interface Set\) on page 857](#)  
[show subscribers agent-circuit-identifier detail \(Subscriber Sessions Using Specified ACI Substring\) on page 857](#)  
[show subscribers interface extensive on page 858](#)  
[show subscribers logical-system terse on page 859](#)  
[show subscribers physical-interface count on page 859](#)  
[show subscribers routing-instance inst1 count on page 859](#)  
[show subscribers stacked-vlan-id detail on page 859](#)  
[show subscribers stacked-vlan-id vlan-id detail \(Combined Output\) on page 859](#)  
[show subscribers stacked-vlan-id vlan-id interface detail \(Combined Output for a Specific Interface\) on page 859](#)  
[show subscribers user-name detail on page 860](#)  
[show subscribers vlan-id on page 860](#)  
[show subscribers vlan-id detail on page 860](#)

**Output Fields** [Table 65 on page 846](#) lists the output fields for the **show subscribers** command. Output fields are listed in the approximate order in which they appear.

**Table 65: show subscribers Output Fields**

Field Name	Field Description
User Name	Name of subscriber.
Type	Subscriber client type (DHCP, L2TP, PPP, PPPoE, STATIC-INTERFACE, VLAN).
IP Address	Subscriber IPv4 address.
IP Netmask	Subscriber IP netmask.
Primary DNS Address	IP address of primary DNS server.



Table 65: show subscribers Output Fields (*continued*)

Field Name	Field Description
Secondary DNS Address	IP address of secondary DNS server.
Primary WINS Address	IP address of primary WINS server.
Secondary WINS Address	IP address of secondary WINS server.
IPv6 Address	Subscriber IPv6 address, or multiple addresses.
IPv6 Prefix	Subscriber IPv6 prefix. If you are using DHCPv6 prefix delegation, this is the delegated prefix.
IPv6 User Prefix	IPv6 prefix obtained through ND/RA.
IPv6 Address Pool	Subscriber IPv6 address pool. The IPv6 address pool is used to allocate IPv6 prefixes to the DHCPv6 clients.
IPv6 Network Prefix Length	Length of the network portion of the IPv6 address.
IPv6 Prefix Length	Length of the subscriber IPv6 prefix.
Logical System	Logical system associated with the subscriber.
Routing Instance	Routing instance associated with the subscriber.
Interface	Interface associated with the subscriber. The router or switch displays subscribers whose interface matches or begins with the specified interface.  The * character indicates a continuation of addresses for the same session.
Interface Type	Whether the subscriber interface is <b>Static</b> or <b>Dynamic</b> .
Interface Set	Internally generated name of the dynamic ACI interface set used by the subscriber session.
Interface Set Type	Interface type of the ACI interface set: <b>Dynamic</b> . This is the only ACI interface set type currently supported.
Interface Set Session ID	Identifier of the dynamic ACI interface set entry in the session database.
Underlying Interface	Name of the underlying interface for the subscriber session.
Dynamic Profile Name	Dynamic profile used for the subscriber.
Dynamic Profile Version	Version number of the dynamic profile used for the subscriber.
MAC Address	MAC address associated with the subscriber.
State	Current state of the subscriber session ( <b>Init</b> , <b>Configured</b> , <b>Active</b> , <b>Terminating</b> , <b>Tunneled</b> ).



Table 65: show subscribers Output Fields (*continued*)

Field Name	Field Description
VLAN Id	VLAN ID associated with the subscriber in the form <i>tpid.vlan-id</i> .
Stacked VLAN Id	Stacked VLAN ID associated with the subscriber in the form <i>tpid.vlan-id</i> .
RADIUS Accounting ID	RADIUS accounting ID associated with the subscriber.
Agent Circuit ID	Option 82 agent circuit ID associated with the subscriber. The ID is displayed as an ASCII string unless the value has nonprintable characters, in which case it is displayed in hexadecimal format.
Agent Remote ID	Option 82 agent remote ID associated with the subscriber. The ID is displayed as an ASCII string unless the value has nonprintable characters, in which case it is displayed in hexadecimal format.
DHCP Relay IP Address	IP address used by the DHCP relay agent.
Login Time	Date and time at which the subscriber logged in.
IPv4 rpf-check Fail Filter Name	Name of the filter applied by the dynamic profile to IPv4 packets that fail the RPF check.
IPv6 rpf-check Fail Filter Name	Name of the filter applied by the dynamic profile to IPv6 packets that fail the RPF check.
DHCP Options	len = number of hex values in the message. The hex values specify the type, length, value (TLV) for DHCP options, as defined in RFC 2132.
Session ID	ID number for a subscriber service session.
Underlying Session ID	For DHCPv6 subscribers on a PPPoE network, displays the session ID of the underlying PPPoE interface.
Service Sessions	Number of service sessions (that is, a service activated using RADIUS CoA) associated with the subscribers.
Service Session Name	Service session profile name.
Session Timeout (seconds)	Number of seconds of access provided to the subscriber before the session is automatically terminated.
Idle Timeout (seconds)	Number of seconds subscriber can be idle before the session is automatically terminated.
IPv6 Delegated Address Pool	Name of the pool used for DHCPv6 prefix delegation.
IPv6 Delegated Network Prefix Length	Length of the prefix configured for the IPv6 delegated address pool.
IPv6 Interface Address	Address assigned by the Framed-Ipv6-Prefix AAA attribute.



Table 65: show subscribers Output Fields (*continued*)

Field Name	Field Description
<b>IPv6 Framed Interface Id</b>	Interface ID assigned by the Framed-Interface-Id AAA attribute.
<b>ADF IPv4 Input Filter Name</b>	Name assigned to the Ascend-Data-Filter (ADF) interface IPv4 input filter (client or service session). The filter name is followed by the rules (in hexadecimal format) associated with the ADF filter and the decoded rule in Junos OS filter style.
<b>ADF IPv4 Output Filter Name</b>	Name assigned to the Ascend-Data-Filter (ADF) interface IPv4 output filter (client or service session). The filter name is followed by the rules (in hexadecimal format) associated with the ADF filter and the decoded rule in Junos OS filter style.
<b>ADF IPv6 Input Filter Name</b>	Name assigned to the Ascend-Data-Filter (ADF) interface IPv6 input filter (client or service session). The filter name is followed by the rules (in hexadecimal format) associated with the ADF filter and the decoded rule in Junos OS filter style.
<b>ADF IPv6 Output Filter Name</b>	Name assigned to the Ascend-Data-Filter (ADF) interface IPv6 output filter (client or service session). The filter name is followed by the rules (in hexadecimal format) associated with the ADF filter and the decoded rule in Junos OS filter style.
<b>IPv4 Input Filter Name</b>	Name assigned to the IPv4 input filter (client or service session).
<b>IPv4 Output Filter Name</b>	Name assigned to the IPv4 output filter (client or service session).
<b>IPv6 Input Filter Name</b>	Name assigned to the IPv6 input filter (client or service session).
<b>IPv6 Output Filter Name</b>	Name assigned to the IPv6 output filter (client or service session).
<b>IFL Input Filter Name</b>	Name assigned to the logical interface input filter (client or service session).
<b>IFL Output Filter Name</b>	Name assigned to the logical interface output filter (client or service session).



## Sample Output

### show subscribers (IPv4)

```
user@host> show subscribers
Interface          IP Address/VLAN ID  User Name          LS:RI
ge-1/3/0.1073741824 100                  WHOLESALE-CLIENT  default:default
demux0.1073741824    100.0.0.10          RETAILER1-CLIENT  test1:retailer1
demux0.1073741825    101.0.0.3           RETAILER2-CLIENT  test1:retailer2
demux0.1073741826    102.0.0.3           RETAILER2-CLIENT  test1:retailer2
```

### show subscribers (IPv6)

```
user@host> show subscribers
Interface          IP Address/VLAN ID  User Name          LS:RI
ge-1/0/0.0         2001::c0:0:0:0/74  WHOLESALE-CLIENT  default:default
*                  2002::1/128        subscriber-25      default:default
```

### show subscribers (IPv4 and IPv6 Dual Stack)

```
user@host> show subscribers
Interface          IP Address/VLAN ID  User Name          LS:RI
demux0.1073741834  0x8100.1002 0x8100.1  default:default
demux0.1073741835  0x8100.1001 0x8100.1  default:default
pp0.1073741836     61.1.1.1          dualstackuser1@ISP1.com
default:ASP-1
*                  2041:1:1::/48
*                  2061:1:1:1::/64
pp0.1073741837     23.1.1.3          dualstackuser2@ISP1.com
default:ASP-1
*                  2001:1:2:5::/64
```

### show subscribers (LNS on MX Series Routers)

```
user@host> show subscribers
Interface          IP Address/VLAN ID  User Name          LS:RI
si-4/0/0.1         192.168.4.1        xyz@example.com     default:default
```

### show subscribers client-type dhcp detail

```
user@host> show subscribers client-type dhcp detail
Type: DHCP
IP Address: 100.20.9.7
IP Netmask: 255.255.0.0
Logical System: default
Routing Instance: default
Interface: demux0.1073744127
Interface type: Dynamic
Dynamic Profile Name: dhcp-demux-prof
MAC Address: 00:10:95:00:00:98
State: Active
Radius Accounting ID: jnpr :2304
Login Time: 2009-08-25 14:43:52 PDT

Type: DHCP
IP Address: 100.20.10.7
IP Netmask: 255.255.0.0
Logical System: default
Routing Instance: default
Interface: demux0.1073744383
Interface type: Dynamic
Dynamic Profile Name: dhcp-demux-prof
```



```

MAC Address: 00:10:94:00:01:f3
State: Active
Radius Accounting ID: jnpr :2560
Login Time: 2009-08-25 14:43:56 PDT

```

#### show subscribers count

```

user@host> show subscribers count
Total Subscribers: 188, Active Subscribers: 188

```

#### show subscribers address detail (IPv6)

```

user@host> show subscribers address 100.16.12.137 detail
Type: PPPoE
User Name: pppoeTerV6User1Svc
IP Address: 100.16.12.137
IP Netmask: 255.0.0.0
IPv6 User Prefix: 1016:0:0:c88::/64
Logical System: default
Routing Instance: default
Interface: pp0.1073745151
Interface type: Dynamic
Underlying Interface: demux0.8201
Dynamic Profile Name: pppoe-client-profile
MAC Address: 00:0d:02:01:00:01
Session Timeout (seconds): 31622400
Idle Timeout (seconds): 86400
State: Active
Radius Accounting ID: jnpr demux0.8201:6544
Session ID: 6544
Agent Circuit ID: if13720
Agent Remote ID: if13720
Login Time: 2012-05-21 13:37:27 PDT
Service Sessions: 1

```

#### show subscribers detail (IPv4)

```

user@host> show subscribers detail
Type: DHCP
IP Address: 100.20.9.7
IP Netmask: 255.255.0.0
Primary DNS Address: 192.168.17.1
Secondary DNS Address: 192.168.17.2
Primary WINS Address: 192.168.22.1
Secondary WINS Address: 192.168.22.2
Logical System: default
Routing Instance: default
Interface: demux0.1073744127
Interface type: Dynamic
Dynamic Profile Name: dhcp-demux-prof
MAC Address: 00:10:95:00:00:98
State: Active
Radius Accounting ID: jnpr :2304
Session Timeout (seconds): 3600
Idle Timeout (seconds): 600
Login Time: 2009-08-25 14:43:52 PDT
DHCP Options: len 52
35 01 01 39 02 02 40 3d 07 01 00 10 94 00 00 08 33 04 00 00
00 3c 0c 15 63 6c 69 65 6e 74 5f 50 6f 72 74 20 2f 2f 36 2f
33 2d 37 2d 30 37 05 01 06 0f 21 2c
Service Sessions: 2

```

#### show subscribers

```

user@host> show subscribers detail

```



#### detail (IPv6)

```
Type: DHCP
User Name: pd-user1
IPv6 Prefix: 2002:db2:ffff:1::/64
Logical System: default
Routing Instance: default
Interface: ge-3/1/3.2
Interface type: Static
MAC Address: 00:51:ff:ff:00:03
State: Active
Radius Accounting ID: 1
Session ID: 1
Login Time: 2011-08-25 12:12:26 PDT
DHCP Options: len 42
00 08 00 02 00 00 00 01 00 0a 00 03 00 01 00 51 ff ff 00 03
00 06 00 02 00 19 00 19 00 0c 00 00 00 00 00 00 00 00 00
00 00
```

#### show subscribers detail (IPv6 Static Demux Interface)

```
user@host> show subscribers detail
Type: STATIC-INTERFACE
User Name: demux0.1@jnpr.net
IPv6 Prefix: 1:2:3:4:5:6:7:aa/128
Logical System: default
Routing Instance: default
Interface: demux0.1
Interface type: Static
Dynamic Profile Name: junos-default-profile
State: Active
Radius Accounting ID: 185
Login Time: 2010-05-18 14:33:56 EDT
```

#### show subscribers detail (L2TP LNS)

```
user@host> show subscribers detail
Type: L2TP
User Name: user1@jnpr.net
```



**Subscribers on MX Series Routers)**

```

IP Address: 10.1.32.58
IP Netmask: 255.255.0.0
Logical System: default
Routing Instance: default
Interface: si-5/2/0.1073749824
Interface type: Dynamic
Dynamic Profile Name: dyn-1ns-profile2
Dynamic Profile Version: 1
State: Active
Radius Accounting ID: 8001
Session ID: 8001
Login Time: 2011-04-25 20:27:50 IST

```

**show subscribers detail (Tunneled Subscriber)**

```

user@host> show subscribers detail
Type: PPPoE
User Name: user1@example.com
Logical System: default
Routing Instance: default
Interface: pp0.1
State: Active, Tunneled
Radius Accounting ID: 512

```

**show subscribers detail (IPv4 and IPv6 Dual Stack)**

```

user@host> show subscribers detail
Type: VLAN
Logical System: default
Routing Instance: default
Interface: demux0.1073741824
Interface type: Dynamic
Dynamic Profile Name: svlanProfile
State: Active
Session ID: 1
Stacked VLAN Id: 0x8100.1001
VLAN Id: 0x8100.1
Login Time: 2011-11-30 00:18:04 PST

Type: PPPoE
User Name: dualstackuser1@ISP1.com
IP Address: 61.1.1.1
IPv6 Prefix: 2041:1:1::/48
IPv6 User Prefix: 2061:1:1:1::/64
Logical System: default
Routing Instance: ASP-1
Interface: pp0.1073741825
Interface type: Dynamic
Dynamic Profile Name: dualStack-Profile1
MAC Address: 00:00:64:03:01:02
State: Active
Radius Accounting ID: 2
Session ID: 2
Login Time: 2011-11-30 00:18:05 PST

Type: DHCP
IPv6 Prefix: 2041:1:1::/48
Logical System: default
Routing Instance: ASP-1
Interface: pp0.1073741825
Interface type: Static
MAC Address: 00:00:64:03:01:02
State: Active
Radius Accounting ID: jnpr :3

```



```
Session ID: 3
Underlying Session ID: 2
Login Time: 2011-11-30 00:18:35 PST
DHCP Options: len 42
00 08 00 02 0b b8 00 01 00 0a 00 03 00 01 00 00 64 03 01 02
00 06 00 02 00 19 00 19 00 0c 00 00 00 00 00 00 00 00 00 00
00 00
```

**show subscribers  
detail (ACI Interface  
Set Session)**

```
user@host> show subscribers detail
Type: VLAN
Logical System: default
Routing Instance: default
Interface: ge-1/0/0
Interface Set: aci-1001-ge-1/0/0.2800
Interface Set Session ID: 0
Underlying Interface: ge-1/0/0.2800
Dynamic Profile Name: aci-vlan-set-profile-2
Dynamic Profile Version: 1
State: Active
Session ID: 1
Agent Circuit ID: aci-ppp-dhcp-20
Login Time: 2012-05-26 01:54:08 PDT
```

**show subscribers  
detail (PPPoE)**

```
user@host> show subscribers detail
Type: PPPoE
User Name: ppphint2
```



**Subscriber Session  
with ACI Interface Set)**

```

IP Address: 10.10.1.5
Logical System: default
Routing Instance: default
Interface: pp0.1073741825
Interface type: Dynamic
Interface Set: aci-1001-demux0.1073741824
Interface Set Type: Dynamic
Interface Set Session ID: 2
Underlying Interface: demux0.1073741824
Dynamic Profile Name: aci-vlan-pppoe-profile
Dynamic Profile Version: 1
MAC Address: 00:00:64:39:01:02
State: Active
Radius Accounting ID: 3
Session ID: 3
Agent Circuit ID: aci-ppp-dhcp-dvlan-50
Login Time: 2012-03-07 13:46:53 PST

```

**show subscribers  
extensive**

```

user@host> show subscribers extensive
Type: DHCP
User Name: pd-user1
IPv6 Prefix: 2002:db2:ffff:1::/64
Logical System: default
Routing Instance: default
Interface: ge-3/1/3.2
Interface type: Static
MAC Address: 00:51:ff:ff:00:03
State: Active
Radius Accounting ID: 1
Session ID: 1
Login Time: 2011-08-25 12:12:26 PDT
DHCP Options: len 42
00 08 00 02 00 00 00 01 00 0a 00 03 00 01 00 51 ff ff 00 03
00 06 00 02 00 19 00 19 00 0c 00 00 00 00 00 00 00 00 00
00 00
IPv6 Address Pool: pd_pool
IPv6 Network Prefix Length: 48

```

**show subscribers  
extensive (RPF Check  
Fail Filter)**

```

user@host> show subscribers extensive
...
Type: VLAN
Logical System: default
Routing Instance: default
Interface: ae0.1073741824
Interface type: Dynamic
Dynamic Profile Name: vlan-prof
State: Active
Session ID: 9
VLAN Id: 100
Login Time: 2011-08-26 08:17:00 PDT
IPv4 rpf-check Fail Filter Name: rpf-allow-dhcp
IPv6 rpf-check Fail Filter Name: rpf-allow-dhcpv6
...

```

**show subscribers  
extensive (L2TP LNS)**

```

user@host> show subscribers extensive
Type: L2TP
User Name: user1@jnpr.net

```



**Subscribers on MX Series Routers)**

IP Address: 10.1.32.58  
IP Netmask: 255.255.0.0  
Logical System: default  
Routing Instance: default  
Interface: si-5/2/0.1073749824  
Interface type: Dynamic  
Dynamic Profile Name: dyn-lns-profile2  
Dynamic Profile Version: 1  
State: Active  
Radius Accounting ID: 8001  
Session ID: 8001  
Login Time: 2011-04-25 20:27:50 IST  
IPv4 Input Filter Name: classify-si-5/2/0.1073749824-in  
IPv4 Output Filter Name: classify-si-5/2/0.1073749824-out

**show subscribers extensive (IPv4 and IPv6 Dual Stack)**

user@host> **show subscribers extensive**

Type: VLAN  
Logical System: default  
Routing Instance: default  
Interface: demux0.1073741824  
Interface type: Dynamic  
Dynamic Profile Name: svlanProfile  
State: Active  
Session ID: 1  
Stacked VLAN Id: 0x8100.1001  
VLAN Id: 0x8100.1  
Login Time: 2011-11-30 00:18:04 PST

Type: PPPoE  
User Name: dualstackuser1@ISP1.com  
IP Address: 61.1.1.1  
IPv6 Prefix: 2041:1:1::/48  
IPv6 User Prefix: 2061:1:1:1::/64  
Logical System: default  
Routing Instance: ASP-1  
Interface: pp0.1073741825  
Interface type: Dynamic  
Dynamic Profile Name: dualStack-Profile1  
MAC Address: 00:00:64:03:01:02  
State: Active  
Radius Accounting ID: 2  
Session ID: 2  
Login Time: 2011-11-30 00:18:05 PST  
IPv6 Delegated Network Prefix Length: 48  
IPv6 Interface Address: 2061:1:1:1::1/64  
IPv6 Framed Interface Id: 1:1:2:2  
IPv4 Input Filter Name: FILTER-IN-pp0.1073741825-in  
IPv4 Output Filter Name: FILTER-OUT-pp0.1073741825-out  
IPv6 Input Filter Name: FILTER-IN6-pp0.1073741825-in  
IPv6 Output Filter Name: FILTER-OUT6-pp0.1073741825-out

Type: DHCP  
IPv6 Prefix: 2041:1:1::/48  
Logical System: default  
Routing Instance: ASP-1  
Interface: pp0.1073741825  
Interface type: Static  
MAC Address: 00:00:64:03:01:02  
State: Active  
Radius Accounting ID: jnpr :3  
Session ID: 3



```

Underlying Session ID: 2
Login Time: 2011-11-30 00:18:35 PST
DHCP Options: len 42
00 08 00 02 0b b8 00 01 00 0a 00 03 00 01 00 00 64 03 01 02
00 06 00 02 00 19 00 19 00 0c 00 00 00 00 00 00 00 00 00
00 00
IPv6 Delegated Network Prefix Length: 48

```

show subscribers  
aci-interface-set-name  
detail (Subscriber  
Sessions Using  
Specified ACI Interface  
Set)

```
user@host> show subscribers aci-interface-set-name aci-1003-ge-1/0/0.4001 detail
```

```

Type: VLAN
Logical System: default
Routing Instance: default
Interface: ge-1/0/0.
Underlying Interface: ge-1/0/0.4001
Dynamic Profile Name: aci-vlan-set-profile
Dynamic Profile Version: 1
State: Active
Session ID: 13
Agent Circuit ID: aci-ppp-vlan-10
Login Time: 2012-03-12 10:41:56 PDT

```

```

Type: PPPoE
User Name: ppphint2
IP Address: 10.10.1.7
Logical System: default
Routing Instance: default
Interface: pp0.1073741834
Interface type: Dynamic
Interface Set: aci-1003-ge-1/0/0.4001
Interface Set Type: Dynamic
Interface Set Session ID: 13
Underlying Interface: ge-1/0/0.4001
Dynamic Profile Name: aci-vlan-pppoe-profile
Dynamic Profile Version: 1
MAC Address: 00:00:65:26:01:02
State: Active
Radius Accounting ID: 14
Session ID: 14
Agent Circuit ID: aci-ppp-vlan-10
Login Time: 2012-03-12 10:41:57 PDT

```

show subscribers  
agent-circuit-identifier  
detail (Subscriber  
Sessions Using

```
user@host> show subscribers agent-circuit-identifier aci-ppp-vlan detail
```

```

Type: VLAN
Logical System: default
Routing Instance: default
Interface: ge-1/0/0.

```



**Specified ACI  
Substring)**

Underlying Interface: ge-1/0/0.4001  
Dynamic Profile Name: aci-vlan-set-profile  
Dynamic Profile Version: 1  
State: Active  
Session ID: 13  
**Agent Circuit ID: aci-ppp-vlan-10**  
Login Time: 2012-03-12 10:41:56 PDT

Type: PPPoE  
User Name: ppphint2  
IP Address: 10.10.1.7  
Logical System: default  
Routing Instance: default  
Interface: pp0.1073741834  
Interface type: Dynamic  
**Interface Set: aci-1003-ge-1/0/0.4001**  
**Interface Set Type: Dynamic**  
**Interface Set Session ID: 13**  
Underlying Interface: ge-1/0/0.4001  
Dynamic Profile Name: aci-vlan-pppoe-profile  
Dynamic Profile Version: 1  
MAC Address: 00:00:65:26:01:02  
State: Active  
Radius Accounting ID: 14  
Session ID: 14  
**Agent Circuit ID: aci-ppp-vlan-10**  
Login Time: 2012-03-12 10:41:57 PDT

**show subscribers  
interface extensive**

user@host> show subscribers interface demux0.1073741826 extensive  
Type: VLAN  
User Name: test1@test.com  
Logical System: default  
Routing Instance: testnet  
Interface: demux0.1073741826  
Interface type: Dynamic  
Dynamic Profile Name: profile-vdemux-relay-23qos  
MAC Address: 00:00:6e:56:01:04  
State: Active  
Radius Accounting ID: 12  
Session ID: 12  
Stacked VLAN Id: 0x8100.1500  
VLAN Id: 0x8100.2902  
Login Time: 2011-10-20 16:21:59 EST

Type: DHCP  
User Name: test1@test.com  
IP Address: 172.16.200.6  
IP Netmask: 255.255.255.0  
Logical System: default  
Routing Instance: testnet  
Interface: demux0.1073741826  
Interface type: Static  
MAC Address: 00:00:6e:56:01:04  
State: Active  
Radius Accounting ID: 21  
Session ID: 21  
Login Time: 2011-10-20 16:24:33 EST  
Service Sessions: 2

Service Session ID: 25  
Service Session Name: SUB-QOS



State: Active

Service Session ID: 26

Service Session Name: service-cb-content

State: Active

IPv4 Input Filter Name: content-cb-in-demux0.1073741826-in

IPv4 Output Filter Name: content-cb-out-demux0.1073741826-out

#### show subscribers logical-system terse

user@host> show subscribers logical-system test1 terse

Interface	IP Address/VLAN ID	User Name	LS:RI
demux0.1073741825	101.0.0.3	RETAILER1-CLIENT	test1:retailer1
demux0.1073741826	102.0.0.3	RETAILER2-CLIENT	test1:retailer2

#### show subscribers physical-interface count

user@host> show subscribers physical-interface ge-1/0/0 count

Total subscribers: 3998, Active Subscribers: 3998

#### show subscribers routing-instance inst1 count

user@host> show subscribers routing-instance inst1 count

Total Subscribers: 188, Active Subscribers: 183

#### show subscribers stacked-vlan-id detail

user@host> show subscribers stacked-vlan-id 101 detail

Type: VLAN  
Interface: ge-1/2/0.1073741824  
Interface type: Dynamic  
Dynamic Profile Name: svlan-prof  
State: Active  
Stacked VLAN Id: 0x8100.101  
VLAN Id: 0x8100.100  
Login Time: 2009-03-27 11:57:19 PDT

#### show subscribers stacked-vlan-id vlan-id detail (Combined Output)

user@host> show subscribers stacked-vlan-id 101 vlan-id 100 detail

Type: VLAN  
Interface: ge-1/2/0.1073741824  
Interface type: Dynamic  
Dynamic Profile Name: svlan-prof  
State: Active  
Stacked VLAN Id: 0x8100.101  
VLAN Id: 0x8100.100  
Login Time: 2009-03-27 11:57:19 PDT

#### show subscribers stacked-vlan-id vlan-id interface detail

user@host> show subscribers stacked-vlan-id 101 vlan-id 100 interface ge-1/2/0.\* detail

Type: VLAN  
Interface: ge-1/2/0.1073741824  
Interface type: Dynamic



**(Combined Output for  
a Specific Interface)**

```
Dynamic Profile Name: svlan-prof
State: Active
Stacked VLAN Id: 0x8100.101
VLAN Id: 0x8100.100
Login Time: 2009-03-27 11:57:19 PDT
```

**show subscribers  
user-name detail**

```
user@host> show subscribers user-name larry1 detail
Type: DHCP
User Name: larry1
IP Address: 100.0.0.37
IP Netmask: 255.255.0.0
Logical System: default
Routing Instance: default
Interface: ge-1/0/0.1
Interface type: Static
Dynamic Profile Name: foo
MAC Address: 00:10:94:00:00:01
State: Active
Radius Accounting ID: 1
Session ID: 1
Login Time: 2011-11-07 08:25:59 PST
DHCP Options: len 52
35 01 01 39 02 02 40 3d 07 01 00 10 94 00 00 01 33 04 00 00
00 3c 0c 15 63 6c 69 65 6e 74 5f 50 6f 72 74 20 2f 2f 32 2f
37 2d 30 2d 30 37 05 01 06 0f 21 2c
```

**show subscribers  
vlan-id**

```
user@host> show subscribers vlan-id 100
Interface      IP Address      User Name
ge-1/0/0.1073741824
ge-1/2/0.1073741825
```

**show subscribers  
vlan-id detail**

```
user@host> show subscribers vlan-id 100 detail
Type: VLAN
Interface: ge-1/0/0.1073741824
Interface type: Dynamic
Dynamic Profile Name: vlan-prof-tpid
State: Active
VLAN Id: 100
Login Time: 2009-03-11 06:48:54 PDT

Type: VLAN
Interface: ge-1/2/0.1073741825
Interface type: Dynamic
Dynamic Profile Name: vlan-prof-tpid
State: Active
VLAN Id: 100
Login Time: 2009-03-11 06:48:54 PDT
```



## show system alarms

<b>Syntax</b>	show system alarms
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display active system alarms.
<b>Options</b>	This command has no options.
<b>Additional Information</b>	System alarms are preset. They include a <b>configuration</b> alarm that appears when no rescue configuration alarm is set and a <b>license</b> alarm that appears when a software feature is configured and no valid license is configured for the feature. For more information about system alarms, see the Junos OS System Basics Configuration Guide.  In Junos OS release 11.1 and later, alarms for fans also show the slot number of the fans in the CLI output.
<b>Required Privilege Level</b>	admin
<b>List of Sample Output</b>	<a href="#">show system alarms on page 861</a> <a href="#">show system alarms (Fan Tray) on page 861</a> <a href="#">show system alarms (QFX Series) on page 861</a>

## Sample Output

<b>show system alarms</b>	<pre> user@host&gt; show system alarms 2 alarms currently active Alarm time          Class    Description 2005-02-24 17:29:34 UTC  Minor    IPsec VPN tunneling usage requires a license 2005-02-24 17:29:34 UTC  Minor    Rescue configuration is not sent </pre>
<b>show system alarms (Fan Tray)</b>	<pre> user@host&gt; show system alarms 4 alarms currently active Alarm time          Class    Description 2010-11-11 20:27:38 UTC  Major    Side Fan Tray 7 Failure 2010-11-11 20:27:13 UTC  Minor    Side Fan Tray 7 Overspeed 2010-11-11 20:27:13 UTC  Major    Side Fan Tray 5 Failure 2010-11-11 20:27:13 UTC  Major    Side Fan Tray 0 Failure </pre>
<b>show system alarms (QFX Series)</b>	<pre> user@switches&gt; show system alarms 2 alarms currently active Alarm time Class Description 2005-02-24 17:29:34 UTC Minor Rescue configuration is not sent </pre>



## show system audit

<b>Syntax</b>	show system audit <root-only>
<b>Syntax (EX Series Switch and MX Series Router)</b>	show system audit <all-members> <local> <member <i>member-id</i> > <root-only>
<b>Syntax (TX Matrix Router)</b>	show system audit <all-lcc   lcc <i>number</i>   scc> <root-only>
<b>Syntax (TX Matrix Plus Router)</b>	show system audit <all-chassis   all-lcc   lcc <i>number</i>   sfc <i>number</i> > <root-only>
<b>Syntax (QFX Series)</b>	show system audit <infrastructure <i>name</i>   interconnect-device <i>name</i>   node-group <i>name</i>   root-only>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the state and checksum values for file systems.
<b>Options</b>	<p><b>none</b>—Display the state and checksum values for all file systems.</p> <p><b>all-chassis</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) Display file system MD5 hash and permissions information for all of the chassis.</p> <p><b>all-lcc</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display file system MD5 hash and permissions information for all T640 routers (or line-card chassis) connected to the TX Matrix router. On a TX Matrix Plus router, display file system MD5 hash and permissions information for all T1600 routers (or line-card chassis) connected to the TX Matrix Plus router.</p> <p><b>all-members</b>—(EX4200 switch, QFX Series, and MX Series routers only) (Optional) Display file system MD5 hash and permissions information on all members of the Virtual Chassis configuration.</p> <p><b>infrastructure <i>name</i></b>—(QFabric systems only) (Optional) Display file system MD5 hash and permissions information for a fabric control Routing Engine or a fabric control Routing Engine.</p> <p><b>interconnect-device <i>name</i></b>—(QFabric systems only) (Optional) Display file system MD5 hash and permissions information for the Interconnect device.</p>



**local**—(EX4200 switch, QFX Series, and MX Series routers only) (Optional) Display file system MD5 hash and permissions information on the local Virtual Chassis member.

**member *member-id***—(EX4200 switch, QFX Series, and MX Series routers only) (Optional) Display file system MD5 hash and permissions information on the specified member of the Virtual Chassis configuration. For EX4200 switches, replace ***member-id*** with a value from 0 through 9. For an MX Series Virtual Chassis, replace ***member-id*** with a value of 0 or 1.

**node-group *name***—(QFabric systems only) (Optional) Display file system MD5 hash and permissions information for the Node group

**root-only**—(Optional) Check only the root (/) file system. On a QFabric system, you can check the root (/) file system on the infrastructure (fabric manager Routing Engine and fabric control Routing Engine), Interconnect device, or Node group.

**scc**—(TX Matrix routers only) (Optional) Display file system MD5 hash and permissions information for the TX Matrix router (or switch-card chassis).

**sfc *number***—(TX Matrix Plus routers only) (Optional) Display file system MD5 hash and permissions information for the TX Matrix Plus router (or switch-fabric chassis). Replace *number* with 0.

**Additional Information** To redirect the output to a file, issue the following command:

```
ssh device-name 'show system audit root-only' > output-file
```

If you save the output of the **show system audit root-only** command to a file, you can compare it to subsequent output from the command to determine whether anything has changed.

By default, when you issue the **show system audit** command on a TX Matrix or TX Matrix Plus master Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on the TX Matrix router) or T1600 (in a routing matrix based on a TX Matrix Plus router) master Routing Engines connected to it. If you issue the command on the TX Matrix or TX Matrix Plus backup Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) or T1600 (in a routing matrix based on a TX Matrix Plus router) backup Routing Engines that are connected to it.

**Required Privilege Level** admin

**List of Sample Output** [show system audit root-only on page 864](#)  
[show system audit lcc \(TX Matrix Router\) on page 864](#)  
[show system audit lcc \(TX Matrix Plus Router\) on page 866](#)  
[show system audit root-only \(QFX3500 Switch\) on page 868](#)



## Sample Output

### show system audit root-only

```

user@host> show system audit root-only
#           user: root
#           machine: my-host
#           tree: /
date: Fri Feb 11 21:21:46 2000

# .
/set type=file uid=0 gid=0 mode=0755 nlink=1
.           type=dir nlink=23 size=1024 time=950252640.0
.cshrc      uid=3 gid=7 mode=0644 size=177 time=939182975.0 \
            md5digest=f414e06fea6bd646244b98e13d6e6226
.kernel.jkernel.backup \
            mode=0744 size=1934552 time=944688902.0 \
            md5digest=2c343cf0bd9fea8f04f78604feed7aa4
.profile    uid=3 gid=7 mode=0644 nlink=2 size=173 time=939182975.0 \
            md5digest=55a1e3c6c67789c9d3a1cce1ea39f670
COPYRIGHT   uid=3 gid=7 mode=0444 size=3425 time=939182975.0 \
            md5digest=7df8bc77dcee71382ea73eb0ec6a9243
boot.config mode=0644 size=3 time=945902618.0 \
            md5digest=93d722493ed38477338a1405d7dcbb40
boot.help   uid=3 gid=7 mode=0444 size=411 time=939182876.0 \
            md5digest=9b7126385734bcae753f4179ab59d8e5
compat      type=link mode=0777 size=11 time=915149058.0 \
            link=/usr/compat
kernel      mode=0444 size=1947607 time=950230892.0 \
            md5digest=1a2a8aff2fec678a918ba0d6bf063980
kernel.avr  uid=1112 size=1947642 time=950252597.0 \
            md5digest=82e1637682d58ec28964dfee7fccb62e
kernel.config \
            mode=0644 size=0 time=915149058.0 \
            md5digest=d41d8cd98f00b204e9800998ecf8427e
sys         type=link mode=0777 size=11 time=915149029.0 \
            link=usr/src/sys

```

### show system audit lcc (TX Matrix Router)

```

user@host> show system audit lcc 2
lcc2-re0:
-----
#           user: root
#           machine: rodin-lcc2
#           tree: /
#           date: Mon Sep 13 11:55:33 2004

# .
/set type=file uid=0 gid=0 mode=0555 nlink=1 flags=none
.           type=dir nlink=20 size=512 time=1094982121.0
COPYRIGHT   mode=0644 size=4735 time=986012708.0 \
            md5digest=78396df1404ad742e6eb1be28f0cd63b
kernel      type=link mode=0700 size=17 time=1090266262.0 \
            link=/packages/jkernel

# ./altconfig
altconfig   type=dir nlink=2 size=512 time=1089801320.0
# ./altconfig
..

# ./altroot

```



```

altroot          type=dir nlink=2 size=512 time=1089801320.0
# ./altroot
..

# ./b
b                type=dir mode=0755 nlink=2 size=512 time=1093961429.0
# ./b
..

# ./bin
/set type=file uid=0 gid=0 mode=0700 nlink=1 flags=none
bin             type=dir mode=0755 nlink=2 size=512 time=1089843059.0
  [             type=link size=28 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/test
  cat           type=link size=27 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/cat
  chmod         type=link size=29 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/chmod
  cp            type=link size=26 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/cp
  csh           type=link size=27 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/csh
  date          type=link size=28 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/date
  dd            type=link size=26 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/dd
  df            type=link size=26 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/df
  echo          type=link size=28 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/echo
  ed            type=link size=26 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/ed
  expr          type=link size=28 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/expr
  hostname      type=link size=32 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/hostname
  kill          type=link size=28 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/kill
  ln            type=link size=26 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/ln
  ls            type=link size=26 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/ls
  mkdir         type=link size=29 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/mkdir
  mv            type=link size=26 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/mv
  ps            type=link size=26 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/ps
  pwd           type=link size=27 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/pwd
  rcp           type=link size=27 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/rcp
  red           type=link size=26 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/ed
  rm            type=link size=26 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/rm
  rmdir         type=link size=29 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/rmdir
  sh            type=link size=26 time=1090266270.0 \
                link=/packages/mnt/jbase/bin/sh

```



```

sleep      type=link size=29 time=1090266270.0 \
link=/packages/mnt/jbase/bin/sleep
stty       type=link size=28 time=1090266270.0 \
link=/packages/mnt/jbase/bin/stty
sync       type=link size=28 time=1090266270.0 \
link=/packages/mnt/jbase/bin/sync
tcsh       type=link size=27 time=1090266270.0 \
link=/packages/mnt/jbase/bin/csh
test       type=link size=28 time=1090266270.0 \
link=/packages/mnt/jbase/bin/test
# ./bin
..

# ./boot
/set type=file uid=0 gid=0 mode=0444 nlink=1 flags=none
boot       type=dir mode=0555 nlink=3 size=512 time=1095069935.0
  boot0    size=512 time=1094978286.0 \
md5digest=6f780822dd4ae482a20462b66e542cca
  boot1    mode=0555 size=512 time=1094978294.0 \
md5digest=8d112b09df342cd0b60fdb9bdcde8e07
  boot2    mode=0555 size=7680 time=1094978294.0 \
md5digest=28eb58c4068c6b85717e1484f9e028e4
  cdboot   mode=0555 size=165888 time=1094978298.0 \
md5digest=1474c6b800dfc82ba552d7c36116d07d
  kgzldr.o size=5996 time=1094982121.0 \
md5digest=c53dc948eb07e2ea4eb0413e4c4634a3
  loader   mode=0555 size=163840 time=1094978298.0 \
md5digest=82d9dc2d31033476bfb61bb7264c4fed
  loader.4th size=9237 time=986013631.0 \
md5digest=43144391465ad50267d31e0a320be1de
...

```

#### show system audit lcc (TX Matrix Plus Router)

```

user@host> show system audit all-chassis

sfc0-re0:
-----
#      user: root
#      machine: finalfive
#      tree: /
#      date: Mon May 18 00:13:16 2009

# .
/set type=file uid=0 gid=0 mode=0755 nlink=1 flags=none
.      type=dir nlink=23 size=512 time=1242347096.0
  COPYRIGHT mode=0644 size=6196 time=1168587741.0 \
md5digest=bbad415e1c29bbedd9b383537100412c
  kernel   type=link size=17 time=1242347011.0 link=/packages/jkernel
  staging   type=link mode=0777 size=8 time=1242346935.0 link=/var/tmp

# ./snap
.snap   type=dir mode=0775 nlink=2 size=512 time=1242346922.0
# ./snap
..

# ./altconfig
altconfig type=dir mode=0500 nlink=2 size=512 time=1242319843.0
# ./altconfig
..

```



```

# ./altroot
altroot      type=dir mode=0500 nlink=2 size=512 time=1242319843.0
# ./altroot
..

# ./bin
bin          type=dir nlink=2 size=512 time=1242346944.0
  \133      type=link size=28 time=1242346942.0 \
            link=/packages/mnt/jbase/bin/test
  cat       type=link size=27 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/cat
  chflags   type=link size=31 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/chflags
  chmod     type=link size=29 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/chmod
  cp        type=link size=26 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/cp
  csh       type=link size=27 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/csh
  date      type=link size=28 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/date
  dd        type=link size=26 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/dd
  df        type=link size=26 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/df
  echo      type=link size=28 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/echo
  ed        type=link size=26 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/ed
  expr      type=link size=28 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/expr
  hostname  type=link size=32 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/hostname
  kill      type=link size=28 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/kill
  ln        type=link size=26 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/ln
  ls        type=link size=26 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/ls
  mkdir     type=link size=29 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/mkdir
  mv        type=link size=26 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/mv
  pax       type=link size=27 time=1242346944.0 \
            link=/packages/mnt/jbase/bin/pax
  ps        type=link size=26 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/ps
  pwd       type=link size=27 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/pwd
  rcp       type=link size=27 time=1242346942.0 \
            link=/packages/mnt/jbase/bin/rcp
  red       type=link size=26 time=1242346941.0 \
            link=/packages/mnt/jbase/bin/ed
  rm        type=link size=26 time=1242346942.0 \
            link=/packages/mnt/jbase/bin/rm
  rmdir     type=link size=29 time=1242346942.0 \
            link=/packages/mnt/jbase/bin/rmdir
  sh        type=link size=26 time=1242346942.0 \
            link=/packages/mnt/jbase/bin/sh

```



```

sleep      type=link size=29 time=1242346942.0 \
           link=/packages/mnt/jbase/bin/sleep
stty       type=link size=28 time=1242346942.0 \
           link=/packages/mnt/jbase/bin/stty
sync       type=link size=28 time=1242346942.0 \
           link=/packages/mnt/jbase/bin/sync
tcsh       type=link size=27 time=1242346941.0 \
           link=/packages/mnt/jbase/bin/csh
test       type=link size=28 time=1242346942.0 \
           link=/packages/mnt/jbase/bin/test
# ./bin
...

```

#### show system audit root-only (QFX3500 Switch)

```

user@switch> show system audit root-only
#          user: root
#          machine: my-host
#          tree: /
date: Fri Feb 11 21:21:46 2000

# .
/set type=file uid=0 gid=0 mode=0755 nlink=1
.          type=dir nlink=23 size=1024 time=950252640.0
.cshrc     uid=3 gid=7 mode=0644 size=177 time=939182975.0 \
           md5digest=f414e06fea6bd646244b98e13d6e6226
.kernel.jkernel.backup \
           mode=0744 size=1934552 time=944688902.0 \
           md5digest=2c343cf0bd9fea8f04f78604feed7aa4
.profile   uid=3 gid=7 mode=0644 nlink=2 size=173 time=939182975.0 \
           md5digest=55a1e3c6c67789c9d3a1cce1ea39f670
COPYRIGHT  uid=3 gid=7 mode=0444 size=3425 time=939182975.0 \
           md5digest=7df8bc77dcee71382ea73eb0ec6a9243
boot.config mode=0644 size=3 time=945902618.0 \
           md5digest=93d722493ed38477338a1405d7dcbba0
boot.help  uid=3 gid=7 mode=0444 size=411 time=939182876.0 \
           md5digest=9b7126385734bcae753f4179ab59d8e5
compat     type=link mode=0777 size=11 time=915149058.0 \
           link=/usr/compat
kernel     mode=0444 size=1947607 time=950230892.0 \
           md5digest=1a2a8aff2fec678a918ba0d6bf063980
kernel.avr uid=1112 size=1947642 time=950252597.0 \
           md5digest=82e1637682d58ec28964dfef7fccb62e
kernel.config \
           mode=0644 size=0 time=915149058.0 \
           md5digest=d41d8cd98f00b204e9800998ecf8427e
sys        type=link mode=0777 size=11 time=915149029.0 \
           link=/usr/src/sys

```



## show system boot-messages

<b>Syntax</b>	show system boot-messages
<b>Syntax (EX Series Switches)</b>	show system boot-messages <all-members> <local> <member <i>member-id</i> >
<b>Syntax (TX Matrix Router)</b>	show system boot-messages <all-chassis   all-lcc   lcc <i>number</i>   scc>
<b>Syntax (TX Matrix Plus Router)</b>	show system boot-messages <all-chassis   all-lcc   lcc <i>number</i>   sfc <i>number</i> >
<b>Syntax (MX Series Router)</b>	show system boot-messages <all-members> <local> <member <i>member-id</i> >
<b>Syntax (QFX Series)</b>	show system boot-messages infrastructure <i>name</i>   interconnect-device <i>name</i>   node-group <i>name</i>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display initial messages generated by the system kernel upon startup. These messages are the contents of <code>/var/run/dmesg.boot</code> .
<b>Options</b>	<p><b>none</b>—Display all boot time messages.</p> <p><b>all-chassis</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) Display boot time messages for all of the chassis.</p> <p><b>all-lcc</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display boot time messages for all T640 routers (or line-card chassis) connected to a TX Matrix router. On a TX Matrix Plus router, display boot time messages for all T1600 routers (or line-card chassis) connected to a TX Matrix Plus router.</p> <p><b>all-members</b>—(EX4200 switches and MX Series routers only) (Optional) Display boot time messages on all members of the Virtual Chassis configuration.</p> <p><b>infrastructure <i>name</i></b>—(QFabric systems only) (Optional) Display boot time messages on the fabric control Routing Engine or fabric manager Routing engines.</p> <p><b>interconnect-device <i>name</i></b>—(QFabric systems only) (Optional) Display boot time messages on the Interconnect device.</p> <p><b>lcc <i>number</i></b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display boot time messages for a specific T640 router connected to a TX Matrix</p>



router. On a TX Matrix Plus router, display boot time messages for a specific T1600 router connected to a TX Matrix Plus router. Replace **number** with a value from **0** through **3**.

**local**—(EX4200 switches and MX Series routers only) (Optional) Display boot time messages on the local Virtual Chassis member.

**member member-id**—(EX4200 switches and MX Series routers only) (Optional) Display boot time messages on the specified member of the Virtual Chassis configuration. For EX4200 switches, replace **member-id** with a value from 0 through 9. For an MX Series Virtual Chassis, replace **member-id** with a value of 0 or 1.

**node-group name**—(QFabric systems only) (Optional) Display boot time messages on the Node group.

**scc**—(TX Matrix routers only) (Optional) Display boot time messages for the TX Matrix router (or switch-card chassis).

**sfc number**—(TX Matrix Plus routers only) (Optional) Display boot time messages for the TX Matrix Plus router (or switch-fabric chassis). Replace **number** with **0**.

**Additional Information** By default, when you issue the **show system boot-messages** command on a TX Matrix or TX Matrix Plus master Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) master Routing Engines or T1600 (in a routing matrix based on a TX Matrix Plus router) master Routing Engines connected to it. Likewise, if you issue the same command on the TX Matrix or TX Matrix Plus backup Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) backup Routing Engines or T1600 (routing matrix based on a TX Matrix Plus router) backup Routing Engines that are connected to it.

**Required Privilege Level** view

**List of Sample Output** [show system boot-messages \(TX Matrix Router\) on page 871](#)  
[show system boot-messages lcc \(TX Matrix Router\) on page 872](#)  
[show system boot-messages \(TX Matrix Plus Router\) on page 873](#)  
[show system boot-messages \(QFX3500 Switch\) on page 873](#)



## Sample Output

show system  
boot-messages (TX  
Matrix Router)

```
user@host> show system boot-messages
Copyright (c) 1992-1998 FreeBSD Inc.
Copyright (c) 1996-2000 Juniper Networks, Inc.
All rights reserved.
Copyright (c) 1982, 1986, 1989, 1991, 1993
    The Regents of the University of California. All rights reserved.

JUNOS 4.1-20000216-Zf8469 #0: 2000-02-16 12:57:28 UTC
  tlim@single.juniper.net:/p/build/20000216-0905/4.1/release_kernel/sys/compil
e/GENERIC
CPU: Pentium Pro (332.55-MHz 686-class CPU)
  Origin = "GenuineIntel" Id = 0x66a Stepping=10
  Features=0x183f9ff<FPU,VME,DE,PSE,TSC,MSR,PAE,MCE,CX8,SEP,MTRR,PGE,MCA,CMOV,<b1
16>,<b17>,MMX,<b24>>
Teknor CPU Card Recognized
real memory = 805306368 (786432K bytes)
avail memory = 786280448 (767852K bytes)
Probing for devices on PCI bus 0:
chip0 <generic PCI bridge (vendor=8086 device=7192 subclass=0)> rev 3 class 6000
0 on pci0:0:0
chip1 <Intel 82371AB PCI-ISA bridge> rev 1 class 60100 on pci0:7:0
chip2 <Intel 82371AB IDE interface> rev 1 class 10180 on pci0:7:1
chip3 <Intel 82371AB USB interface> rev 1 class c0300 int d irq 11 on pci0:7:2
smb0 <Intel 82371AB SMB controller> rev 1 class 68000 on pci0:7:3
pcic0 <TI PCI-1131 PCI-CardBus Bridge> rev 1 class 60700 int a irq 15 on pci0:13
:0
TI1131 PCI Config Reg: [pci only][FUNC0 pci int]
pcic1 <TI PCI-1131 PCI-CardBus Bridge> rev 1 class 60700 int b irq 12 on pci0:13
:1
TI1131 PCI Config Reg: [pci only][FUNC1 pci int]
fxp0 <Intel EtherExpress Pro 10/100B Ethernet> rev 8 class 20000 int a irq 12 on

pci0:16:0
chip4 <generic PCI bridge (vendor=1011 device=0022 subclass=4)> rev 4 class 6040
0 on pci0:17:0
fxp1 <Intel EtherExpress Pro 10/100B Ethernet> rev 8 class 20000 int a irq 10 on

pci0:19:0
Probing for devices on PCI bus 1:
mcs0 <Miscellaneous Control Subsystem> rev 12 class ff0000 int a irq 12 on pci1:
13:0
fxp2 <Intel EtherExpress Pro 10/100B Ethernet> rev 8 class 20000 int a irq 10 on

pci1:14:0
Probing for devices on the ISA bus:
sc0 at 0x60-0x6f irq 1 on motherboard
sc0: EGA color <16 virtual consoles, flags=0x0>
ed0 not found at 0x300
ed1 not found at 0x280
ed2 not found at 0x340
psm0 not found at 0x60
sio0 at 0x3f8-0x3ff irq 4 flags 0x20010 on isa
sio0: type 16550A, console
sio1 at 0x3e8-0x3ef irq 5 flags 0x20000 on isa
sio1: type 16550A
sio2 at 0x2f8-0x2ff irq 3 flags 0x20000 on isa
sio2: type 16550A
pcic0 at 0x3e0-0x3e1 on isa
```



```

PC-Card ctrlr(0) TI PCI-1131 [CardBus bridge mode] (5 mem & 2 I/O windows)
pcic0: slot 0 controller I/O address 0x3e0
npx0 flags 0x1 on motherboard
npx0: INT 16 interface
fdc0: direction bit not set
fdc0: cmd 3 failed at out byte 1 of 3
fdc0 not found at 0x3f0
wdc0 at 0x1f0-0x1f7 irq 14 on isa
wdc0: unit 0 (wd0): <SunDisk SQFXB-80>, single-sector-i/o
wd0: 76MB (156672 sectors), 612 cyls, 8 heads, 32 S/T, 512 B/S
wdc0: unit 1 (wd1): <IBM-DCXA-210000>
wd1: 8063MB (16514064 sectors), 16383 cyls, 16 heads, 63 S/T, 512 B/S
wdc1 not found at 0x170
wdc2 not found at 0x180
ep0 not found at 0x300
fxp0: Ethernet address 00:a0:a5:12:05:5a
fxp1: Ethernet address 00:a0:a5:12:05:59
fxp2: Ethernet address 02:00:00:00:00:01
swapon: adding /dev/wd1s1b as swap device
Automatic reboot in progress...
/dev/rwd0s1a: clean, 16599 free (95 frags, 2063 blocks, 0.1% fragmentation)
/dev/rwd0s1e: clean, 9233 free (9 frags, 1153 blocks, 0.1% fragmentation)
/dev/rwd0s1a: clean, 16599 free (95 frags, 2063 blocks, 0.1% fragmentation)
/dev/rwd1s1f: clean, 4301055 free (335 frags, 537590 blocks, 0.0% fragmentation)

```

**show system  
boot-messages lcc (TX  
Matrix Router)**

```

user@host> show system boot-messages lcc 2
lcc2-re0:
-----
Copyright (c) 1996-2001, Juniper Networks, Inc.
All rights reserved.
Copyright (c) 1992-2001 The FreeBSD Project.
Copyright (c) 1979, 1980, 1983, 1986, 1988, 1989, 1991, 1992, 1993, 1994
    The Regents of the University of California. All rights reserved.
JUNOS 7.0-20040912.0 #0: 2004-09-12 09:16:32 UTC

builder@benten.juniper.net:/build/benten-b/7.0/20040912.0/obj-i386/sys/compile/JUNIPER
Timecounter "i8254" frequency 1193182 Hz
Timecounter "TSC" frequency 601368936 Hz
CPU: Pentium III/Pentium III Xeon/Celeron (601.37-MHz 686-class CPU)
    Origin = "GenuineIntel" Id = 0x68a Stepping = 10

Features=0x387f9ff<FPU,WE,DE,PSE,TSC,MSR,PAE,MCE,CX8,SEP,MTRR,PGE,MCA,CMOV,PAT,PSE36,PN,MMX,FXSR,SSE>
real memory = 2147467264 (2097136K bytes)
sio0: gdb debugging port
avail memory = 2084040704 (2035196K bytes)
Preloaded elf kernel "kernel" at 0xc06d9000.
DEVFS: ready for devices
Pentium Pro MTRR support enabled
md0: Malloc disk
DRAM Data Integrity Mode: ECC Mode with h/w scrubbing
npx0: <math processor> on motherboard
npx0: INT 16 interface
pci0: <ServerWorks NB6635 3.0LE host to PCI bridge> on motherboard
pci0: <PCI bus> on pci0
pcic-pci0: <TI PCI-1410 PCI-CardBus Bridge> irq 15 at device 1.0 on pci0
pcic-pci0: TI12XX PCI Config Reg: [pwr save][pci only]
fxp0: <Intel Embedded 10/100 Ethernet> port 0x1000-0x103f mem
0xfb800000-0xfb81ffff,0xfb820000-0xfb820fff irq 9 at device 3.0 on pci0
fxp1: <Intel Embedded 10/100 Ethernet> port 0x1040-0x107f mem
0xfb840000-0xfb85ffff,0xfb821000-0xfb821fff irq 11 at device 4.0 on pci0
...

```



**show system  
boot-messages (TX  
Matrix Plus Router)**

```
user@host> show system boot-messages
sfc0-re0:
-----
Copyright (c) 1996-2009, Juniper Networks, Inc.
All rights reserved.
Copyright (c) 1992-2006 The FreeBSD Project.
Copyright (c) 1979, 1980, 1983, 1986, 1988, 1989, 1991, 1992, 1993, 1994
    The Regents of the University of California. All rights reserved.
JUNOS 9.6B3.3 #0: 2009-06-17 19:52:08 UTC

builder@lanath.juniper.net:/volume/build/junos/9.6/release/9.6B3.3/obj-i386/bsd/sys/compile/JUNIPER
MPTable: Timecounter "i8254" frequency 1193182 Hz quality 0 CPU: Intel(R) Xeon(R)
CPU          L5238 @ 2.66GHz (2660.01-MHz 686-class CPU) Origin =
"GenuineIntel" Id = 0x1067a Stepping = 10 Features=0xbfebfbff
...
lcc1-re0:
-----
Copyright (c) 1996-2009, Juniper Networks, Inc.
All rights reserved.
Copyright (c) 1992-2006 The FreeBSD Project.
Copyright (c) 1979, 1980, 1983, 1986, 1988, 1989, 1991, 1992, 1993, 1994
    The Regents of the University of California. All rights reserved.
JUNOS 9.6-20090617.0 #0: 2009-06-17 04:15:14 UTC

builder@lanath.juniper.net:/volume/build/junos/9.6/production/20090617.0/obj-i386/bsd/sys/compile/JUNIPER
Timecounter "i8254" frequency 1193182 Hz quality 0
CPU: Intel(R) Xeon(R) CPU          @ 1.86GHz (1862.01-MHz 686-class CPU)

Origin = "GenuineIntel" Id = 0x1067a Stepping = 10
Features=0xbfebfbff
...
```

**show system  
boot-messages  
(QFX3500 Switch)**

```
user@switch> show sytem boot-messages
getmemsize: msgbufp[size=32768] = 0x81d07fe4

System physical memory distribution:
-----
Total physical memory: 4160749568 (3968 MB)
Physical memory used: 3472883712 (3312 MB)
Physical memory allocated to kernel: 2130706432 (2032 MB)
Physical memory allocated to user BTLB: 1342177280 (1280 MB)
-----

Copyright (c) 1996-2010, Juniper Networks, Inc.
All rights reserved.
Copyright (c) 1992-2006 The FreeBSD Project.
Copyright (c) 1979, 1980, 1983, 1986, 1988, 1989, 1991, 1992, 1993, 1994
    The Regents of the University of California. All rights reserved.
JUNOS 11.1I #0: 2010-09-17 19:18:07 UTC

ssiano@svl-junos-pool125.juniper.net:/c/ssiano/DEV_QFX_SI_BRANCH/03/20100917.399988/
obj-xlr/bsd/sys/compile/JUNIPER-DCTOR
WARNING: debug.mpsafenet forced to 0 as ipsec requires Giant
JUNOS 11.1I #0: 2010-09-17 19:18:07 UTC

ssiano@svl-junos-pool125.juniper.net:/c/ssiano/DEV_QFX_SI_BRANCH/03/20100917.399988/
obj-xlr/bsd/sys/compile/JUNIPER-DCTOR
real memory = 3472883712 (3312MB)
avail memory = 1708171264 (1629MB)
cpuid: 0, btlb_cpumap:0xffffffff8
```



```

FreeBSD/SMP: Multiprocessor System Detected: 12 CPUs
ETHERNET SOCKET BRIDGE initialising
Initializing QFX platform properties ..
cpu0 on motherboard
: RMI's XLR CPU Rev. 0.3 with no FPU implemented
  L1 Cache: I size 32kb(32 line), D size 32kb(32 line), eight way.
  L2 Cache: Size 1024kb, eight way
pic_lbus0: <XLR Local Bus>
pic_lbus0: <XLR Local Bus> on motherboard
Enter qfx control ethernet probe addr:0xc5eeec00
gmac4: <XLR GMAC GE Ethernet> on pic_lbus0
me0: Ethernet address 00:1d:b5:f7:68:40
Enter qfx control ethernet probe addr:0xc5eeeb40
gmac5: <XLR GMAC GE Ethernet> on pic_lbus0
me1: Ethernet address 00:1d:b5:f7:68:41
Enter qfx control ethernet probe addr:0xc5eeea80
gmac6: <XLR GMAC GE Ethernet> on pic_lbus0
me1: Ethernet address 00:1d:b5:f7:68:42
sio0 on pic_lbus0
Entering sioattach
sio0: type 16550A, console
xls_setup_intr: skip irq 3, xlr regs are set up somewhere else.
gblmem0 on pic_lbus0
ehci0: <RMI XLS USB 2.0 controller> on pic_lbus0
ehci_bus_attach: allocated resource. tag=1, base=bef24000
xls_ehci_init: endian hardware swapping NOT enabled.
usb0: EHCI version 1.0
usb0 on ehci0
usb0: USB revision 2.0
uhub0: vendor 0x0000 EHCI root hub, class 9/0, rev 2.00/1.00, addr 1
uhub0: 2 ports with 2 removable, self powered
umass0: USB USBFlashDrive, rev 2.00/11.00, addr 2
pcib0: PCIe link 0 up
pcib0: PCIe link 2 up
pcib0: PCIe link 3 up
pcib0: <XLS PCI Host Controller> on pic_lbus0
pci0: <PCI bus> on pcib0
pcib1: <PCI-PCI bridge> at device 0.0 on pci0
pci1: <PCI bus> on pcib1
pci1: <network, ethernet> at device 0.0 (no driver attached)
pcib2: <PCI-PCI bridge> at device 1.0 on pci0
pcib3: <PCI-PCI bridge> at device 2.0 on pci0
pci2: <PCI bus> on pcib3
pci2: <network, ethernet> at device 0.0 (no driver attached)
pcib4: <PCI-PCI bridge> at device 3.0 on pci0
pci3: <PCI bus> on pcib4
pci3: <network, ethernet> at device 0.0 (no driver attached)
cfi device address space at 0xbc000000
cfi0: <AMD/Fujitsu - 8MB> on pic_lbus0
cfi device address space at 0xbc000000
i2c0: <I2C bus controller> on pic_lbus0
i2c1: <I2C bus controller> on pic_lbus0
qfx_fmn0 on pic_lbus0
pool offset 1503776768
xlr_lbus0: <XLR Local Bus Controller> on motherboard
qfx_bcp1d_probe[124]
qfx_bcp1d_probe[138]: dev_type=0x0
qfx_bcp1d_probe[124]
qfx_bcp1d0: QFX BCPLD probe success
qfx_bcp1d0qfx_bcp1d_attach[174]
qfx_bcp1d_attach[207] : bus_space_tag=0x0, bus_space_handle=0xbd900000

```



```
qfx_bcpld_probe[124]
qfx_bcpld1: QFX BCPLD probe success
qfx_bcpld1qfx_bcpld_attach[174]
tor_bcpld_slave_attach[1245] : bus_space_tag=0x0, bus_space_handle=0xbda00000
Initializing product: 96 ..
bmeb: bmeb_lib_init done 0xc60a5000, addr 0x809c99a0
bme0:Virtual BME driver initializing
Timecounter "mips" frequency 1200000000 Hz quality 0
Timecounter "xlr_pic_timer" frequency 66666666 Hz quality 1
Timecounters tick every 1.000 msec
Loading the NETPFE fc module
IPsec: Initialized Security Association Processing.
SMP: AP CPU #3 Launched!
SMP: AP CPU #1 Launched!
SMP: AP CPU #2 Launched!
SMP: AP CPU #4 Launched!
SMP: AP CPU #5 Launched!
SMP: AP CPU #7 Launched!
SMP: AP CPU #6 Launched!
SMP: AP CPU #11 Launched!
SMP: AP CPU #10 Launched!
SMP: AP CPU #9 Launched!
SMP: AP CPU #8 Launched!
da0 at umass-sim0 bus 0 target 0 lun 0
da0: <USB USBFlashDrive 1100> Removable Direct Access SCSI-0 device
da0: 40.000MB/s transfers
da0: 3920MB (8028160 512 byte sectors: 255H 63S/T 499C)
Trying to mount root from ufs:/dev/da0s1a
```



## show system buffers

---

<b>Syntax</b>	show system buffers
<b>Syntax (EX Series)</b>	show system buffers <all-members> <local> <member <i>member-id</i> >
<b>Syntax (TX Matrix Router)</b>	show system buffers <all-chassis   all-lcc   lcc <i>number</i>   scc>
<b>Syntax (TX Matrix Plus Router)</b>	show system buffers <all-chassis   all-lcc   lcc <i>number</i>   sfc <i>number</i> >
<b>Syntax (MX Series Router)</b>	show system buffers <all-members> <local> <member <i>member-id</i> >
<b>Syntax (QFX Series)</b>	show system buffers <infrastructure <i>name</i>   interconnect-device <i>name</i>   node-group <i>name</i>   root-only (infrastructure <i>name</i>   interconnect-device <i>name</i>   node-group <i>name</i> )>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display information about the buffer pool that the Routing Engine uses for local traffic. Local traffic is the routing and management traffic that is exchanged between the Routing Engine and the Packet Forwarding Engine within the router or switch, as well as the routing and management traffic from IP (that is, from OSPF, BGP, SNMP, ping operations, and so on).
<b>Options</b>	<b>none</b> —Show all buffer statistics.  <b>all-lcc</b> —(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, show buffer statistics for all T640 routers (or line-card chassis) connected to the TX Matrix router. On a TX Matrix Plus router, show buffer statistics for all T1600 routers (or line-card chassis) connected to the TX Matrix Plus router.  <b>all-chassis</b> —(TX Matrix and TX Matrix Plus routers only) (Optional) Show buffer statistics for all of the chassis.  <b>all-members</b> —(EX4200 switches and MX Series routers only) (Optional) Show buffer statistics for all members of the Virtual Chassis configuration.  <b>infrastructure <i>name</i></b> —(QFabric systems only) (Optional) Show buffer statistics for a fabric control Routing Engine or a fabric control Routing Engine.



**interconnect-device *name***—(QFabric systems only) (Optional) Show buffer statistics for the Interconnect device.

**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, show buffer statistics for a specific T640 router (or line-card chassis) that is connected to the TX Matrix router. On a TX Matrix Plus router, show buffer statistics for a specific T1600 router (or line-card chassis) that is connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.

**local**—(EX4200 switches and MX Series routers only) (Optional) Show buffer statistics for the local Virtual Chassis member.

**member *member-id***—(EX4200 switches and MX Series routers only) (Optional) Show buffer statistics for the specified member of the Virtual Chassis configuration. For EX4200 switches, replace ***member-id*** with a value from 0 through 9. For an MX Series Virtual Chassis, replace ***member-id*** with a value of 0 or 1.

**node-group *name***—(QFabric systems only) (Optional) Show buffer statistics for the Node group

**sfc**—(TX Matrix Plus routers only) (Optional) Show buffer statistics for the TX Matrix Plus router (or switch-fabric chassis). Replace ***number*** with 0.

**Additional Information** By default, when you issue the **show system buffers** command on a TX Matrix or TX Matrix Plus master Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) master Routing Engines or T1600 (in a routing matrix based on a TX Matrix Plus router) master Routing Engines connected to it. Likewise, if you issue the same command on the TX Matrix or TX Matrix Plus backup Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on the TX Matrix router) backup Routing Engines or T1600 (in a routing matrix based on the TX Matrix Plus router) backup Routing Engines that are connected to it.

A special type of memory buffer called a *cluster* is 2 KB in size. For more information, see *The Design and Implementation of the 4.4BSD Operation System* by McKusic, Bostic, Karels, and Quarterman.

**Required Privilege Level** view

**List of Sample Output** [show system buffers on page 879](#)  
[show system buffers scc \(TX Matrix Router\) on page 879](#)  
[show system buffers sfc \(TX Matrix Plus Router\) on page 879](#)  
[show system buffers all-chassis \(TX Matrix Plus Router\) on page 879](#)  
[show system buffers node-group \(QFabric System\) on page 881](#)

**Output Fields** [Table 66 on page 878](#) describes the output fields for the **show system buffers** command. Output fields are listed in the approximate order in which they appear.



Table 66: show system buffers Output Fields

Field Name	Field Description
<b>mbufs in use</b>	Memory buffers (mbufs) are 128-byte buffers that are used for various purposes inside the kernel. Each memory buffer has a type, and the output itemizes the amount allocated for each type. Types with no memory buffers allocated are not displayed.
<b>mbufs allocated to packet headers</b>	Number of memory buffers currently holding packet headers
<b>mbufs allocated to control blocks</b>	Number of memory buffers currently holding the state for sockets.
<b>mbufs allocated to send data</b>	Number of memory buffers currently holding socket send data.
<b>mbufs allocated to pfe refill data</b>	Number of memory buffers currently holding Packet Forwarding Engine refill data.
<b>mbufs allocated to fxp data</b>	Number of memory buffers currently holding fxp data.
<b>mbufs allocated to socket names and addresses</b>	Number of memory buffers currently holding addresses for sockets.
<b>mbuf clusters in use</b>	Allocation statistics for memory buffer clusters.
<b>allocated to network</b>	Total amount of memory in use by the networking and interprocess communication (IPC) code.
<b>requests for memory denied</b>	Number of times a memory allocation request within the IPC and networking code failed.
<b>requests for memory delayed</b>	Number of times a memory allocation request within the IPC and networking code was postponed.
<b>calls to protocol drain routines</b>	Number of times a memory allocation request within the IPC and networking code triggered a memory reclamation attempt.



## Sample Output

```

show system buffers      user@host> show system buffers
397/893/1290 mbufs in use (current/cache/total)
395/331/726/30000 mbuf clusters in use (current/cache/total/max)
384/256 mbuf+clusters out of packet secondary zone in use (current/cache)
0/0/0/0 4k (page size) jumbo clusters in use (current/cache/total/max)
0/0/0/0 9k jumbo clusters in use (current/cache/total/max)
0/0/0/0 16k jumbo clusters in use (current/cache/total/max)
889K/885K/1774K bytes allocated to network (current/cache/total)
0/0/0 requests for mbufs denied (mbufs/clusters/mbuf+clusters)
0/0/0 requests for jumbo clusters denied (4k/9k/16k)
0/5/1024 sfbufs in use (current/peak/max)
0 requests for sfbufs denied
0 requests for sfbufs delayed
0 requests for I/O initiated by sendfile
0 calls to protocol drain routines

```

```

show system buffers      user@host> show system buffers scc
scc (TX Matrix Router)  213 mbufs in use:
                        11 mbufs allocated to packet headers
                        26 mbufs allocated to socket names and addresses
                        2 mbufs allocated to socket options
                        17 mbufs allocated to socket send data
                        2 mbufs allocated to pfe data
                        155 mbufs allocated to fxp data (rx)
                        511 mbufs allocated to <mbuf type 86>
                        256 mbufs allocated to <mbuf type 92>
924/1162 mbuf clusters in use
2788 Kbytes allocated to network (75% in use)
0 requests for memory denied
0 requests for memory delayed
0 calls to protocol drain routines

```

```

show system buffers      user@host> show system buffers sfc 0
sfc (TX Matrix Plus     sfc0-re0:
Router)
-----
4363/2807/7170 mbufs in use (current/cache/total)
4358/1968/6326/30000 mbuf clusters in use (current/cache/total/max)
256/128 mbuf+clusters out of packet secondary zone in use (current/cache)
0/0/0/0 4k (page size) jumbo clusters in use (current/cache/total/max)
0/0/0/0 9k jumbo clusters in use (current/cache/total/max)
0/0/0/0 16k jumbo clusters in use (current/cache/total/max)
9806K/4637K/14444K bytes allocated to network (current/cache/total)
0/0/0 requests for mbufs denied (mbufs/clusters/mbuf+clusters)
0/0/0 requests for jumbo clusters denied (4k/9k/16k)
0/10/1024 sfbufs in use (current/peak/max)
0 requests for sfbufs denied
0 requests for sfbufs delayed
0 requests for I/O initiated by sendfile
0 calls to protocol drain routines

```

```

show system buffers      user@host> show system buffers all-chassis
all-chassis (TX Matrix  sfc0-re0:
Plus Router)
-----

```



4363/2807/7170 mbufs in use (current/cache/total)  
4358/1968/6326/30000 mbuf clusters in use (current/cache/total/max)  
256/128 mbuf+clusters out of packet secondary zone in use (current/cache)  
0/0/0/0 4k (page size) jumbo clusters in use (current/cache/total/max)  
0/0/0/0 9k jumbo clusters in use (current/cache/total/max)  
0/0/0/0 16k jumbo clusters in use (current/cache/total/max)  
9806K/4637K/14444K bytes allocated to network (current/cache/total)  
0/0/0 requests for mbufs denied (mbufs/clusters/mbuf+clusters)  
0/0/0 requests for jumbo clusters denied (4k/9k/16k)  
0/10/1024 sfbufs in use (current/peak/max)  
0 requests for sfbufs denied  
0 requests for sfbufs delayed  
0 requests for I/O initiated by sendfile  
0 calls to protocol drain routines

lcc0-re0:

-----  
772/2558/3330 mbufs in use (current/cache/total)  
772/598/1370/30000 mbuf clusters in use (current/cache/total/max)  
768/512 mbuf+clusters out of packet secondary zone in use (current/cache)  
0/0/0/0 4k (page size) jumbo clusters in use (current/cache/total/max)  
0/0/0/0 9k jumbo clusters in use (current/cache/total/max)  
0/0/0/0 16k jumbo clusters in use (current/cache/total/max)  
1737K/1835K/3572K bytes allocated to network (current/cache/total)  
0/0/0 requests for mbufs denied (mbufs/clusters/mbuf+clusters)  
0/0/0 requests for jumbo clusters denied (4k/9k/16k)  
0/4/1024 sfbufs in use (current/peak/max)  
0 requests for sfbufs denied  
0 requests for sfbufs delayed  
0 requests for I/O initiated by sendfile  
0 calls to protocol drain routines

lcc1-re0:

-----  
773/2437/3210 mbufs in use (current/cache/total)  
773/453/1226/30000 mbuf clusters in use (current/cache/total/max)  
768/384 mbuf+clusters out of packet secondary zone in use (current/cache)  
0/0/0/0 4k (page size) jumbo clusters in use (current/cache/total/max)  
0/0/0/0 9k jumbo clusters in use (current/cache/total/max)  
0/0/0/0 16k jumbo clusters in use (current/cache/total/max)  
1739K/1515K/3254K bytes allocated to network (current/cache/total)  
0/0/0 requests for mbufs denied (mbufs/clusters/mbuf+clusters)  
0/0/0 requests for jumbo clusters denied (4k/9k/16k)  
0/7/1024 sfbufs in use (current/peak/max)  
0 requests for sfbufs denied  
0 requests for sfbufs delayed  
0 requests for I/O initiated by sendfile  
0 calls to protocol drain routines

lcc2-re0:

-----  
816/2514/3330 mbufs in use (current/cache/total)  
816/554/1370/30000 mbuf clusters in use (current/cache/total/max)  
768/512 mbuf+clusters out of packet secondary zone in use (current/cache)  
0/0/0/0 4k (page size) jumbo clusters in use (current/cache/total/max)  
0/0/0/0 9k jumbo clusters in use (current/cache/total/max)  
0/0/0/0 16k jumbo clusters in use (current/cache/total/max)  
1836K/1736K/3572K bytes allocated to network (current/cache/total)  
0/0/0 requests for mbufs denied (mbufs/clusters/mbuf+clusters)  
0/0/0 requests for jumbo clusters denied (4k/9k/16k)  
0/4/1024 sfbufs in use (current/peak/max)



```

0 requests for sbufs denied
0 requests for sbufs delayed
0 requests for I/O initiated by sendfile

```

**show system buffers  
node-group (QFabric  
System)**

```

user@switch> show system buffers node-group node1
node-group node1:

```

```

-----
2/2698/2700 mbufs in use (current/cache/total)
2/1520/1522/30000 mbuf clusters in use (current/cache/total/max)
0/1280 mbuf+clusters out of packet secondary zone in use (current/cache)
0/0/0/0 4k (page size) jumbo clusters in use (current/cache/total/max)
0/0/0/0 9k jumbo clusters in use (current/cache/total/max)
0/0/0/0 16k jumbo clusters in use (current/cache/total/max)
4K/3714K/3719K bytes allocated to network (current/cache/total)
0/0/0 requests for mbufs denied (mbufs/clusters/mbuf+clusters)
0/0/0 requests for jumbo clusters denied (4k/9k/16k)
0/6/6656 sbufs in use (current/peak/max)
0 requests for sbufs denied
0 requests for sbufs delayed
0 requests for I/O initiated by sendfile
0 calls to protocol drain routines

```

```

re0:

```

```

-----
516/639/1155 mbufs in use (current/cache/total)
515/147/662/30000 mbuf clusters in use (current/cache/total/max)
512/128 mbuf+clusters out of packet secondary zone in use (current/cache)
0/0/0/0 4k (page size) jumbo clusters in use (current/cache/total/max)
0/0/0/0 9k jumbo clusters in use (current/cache/total/max)
0/0/0/0 16k jumbo clusters in use (current/cache/total/max)
1159K/453K/1612K bytes allocated to network (current/cache/total)
0/0/0 requests for mbufs denied (mbufs/clusters/mbuf+clusters)
0/0/0 requests for jumbo clusters denied (4k/9k/16k)
0/4/1024 sbufs in use (current/peak/max)
0 requests for sbufs denied
0 requests for sbufs delayed
0 requests for I/O initiated by sendfile
0 calls to protocol drain routines

```

```

re1:

```

```

-----
519/771/1290 mbufs in use (current/cache/total)
518/176/694/30000 mbuf clusters in use (current/cache/total/max)
512/128 mbuf+clusters out of packet secondary zone in use (current/cache)
0/0/0/0 4k (page size) jumbo clusters in use (current/cache/total/max)
0/0/0/0 9k jumbo clusters in use (current/cache/total/max)
0/0/0/0 16k jumbo clusters in use (current/cache/total/max)
1165K/544K/1710K bytes allocated to network (current/cache/total)
0/0/0 requests for mbufs denied (mbufs/clusters/mbuf+clusters)
0/0/0 requests for jumbo clusters denied (4k/9k/16k)
0/4/1024 sbufs in use (current/peak/max)
0 requests for sbufs denied
0 requests for sbufs delayed
0 requests for I/O initiated by sendfile
0 calls to protocol drain routines

```



## show system certificate

<b>Syntax</b>	show system certificate <certificate-id>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	(Encryption interface on M Series, T Series routers, and QFX Series switches only) Display installed certificates signed by the Juniper Networks certificate authority.
<b>Options</b>	<b>none</b> —Display all installed certificates signed by the Juniper Networks certificate authority. <b>certificate-id</b> —(Optional) Display the details of a particular certificate.
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">show system certificate on page 883</a> <a href="#">show system certificate (QFX Series) on page 883</a>
<b>Output Fields</b>	<a href="#">Table 67 on page 882</a> lists the output fields for the <b>show system certificate</b> command. Output fields are listed in the approximate order in which they appear.

**Table 67: show system certificate Output Fields**

Field Name	Field Description
<b>Certificate identifier</b>	Unique identifier associated with a certificate. The certificate identifier is the common name of the subject.
<b>Issuer</b> <b>Subject</b>	Information about the certificate issuer and the distinguished name (DN) of the issuer, respectively: <ul style="list-style-type: none"> <li>• <b>Organization</b>—Name of the owner's organization.</li> <li>• <b>Organizational unit</b>—Name of the owner's department.</li> <li>• <b>Country</b>—Two-character country code in which the owner's system is located.</li> <li>• <b>State</b>—State in the USA in which the owner is using the certificate.</li> <li>• <b>Locality</b>—City in which the owner's system is located.</li> <li>• <b>Common name</b>—Name of the owner of the certificate.</li> <li>• <b>E-mail address</b>—E-mail address of the owner of the certificate.</li> </ul>
<b>Validity</b>	When a certificate is valid.
<b>Signature algorithm</b>	Encryption algorithm applied to the installed certificate.
<b>Public key algorithm</b>	Encryption algorithm applied to the public key.



## Sample Output

### show system certificate

```
user@host> show system certificate
Certificate identifier: Dallas-v3
  Issuer:
    Organization: Juniper Networks, Organizational unit: Juniper CA,
    Country: US, State: CA, Locality: Sunnyvale, Common name: Dallas CA,
    E-mail address:ca@juniper.net
  Subject:
    Organization: Juniper Networks, Organizational unit: Juniper CA,
    Country: US, State: CA, Locality: Sunnyvale, Common name: Dallas-v3,
    E-mail address:ca@juniper.net
  Validity:
    Not before: Mar 13 03:23:25 2004 GMT
    Not after: Mar 24 03:23:25 2014 GMT
  Signature algorithm: sha1WithRSAEncryption
  Public key algorithm: dsaEncryption
```

### show system certificate (QFX Series)

```
user@host> show system certificate
Certificate identifier: Dallas-v3
  Issuer:
    Organization: Juniper Networks, Organizational unit: Juniper CA,
    Country: US, State: CA, Locality: Sunnyvale, Common name: Dallas CA,
    E-mail address:ca@juniper.net
  Subject:
    Organization: Juniper Networks, Organizational unit: Juniper CA,
    Country: US, State: CA, Locality: Sunnyvale, Common name: Dallas-v3,
    E-mail address:ca@juniper.net
  Validity:
    Not before: Mar 13 03:23:25 2004 GMT
    Not after: Mar 24 03:23:25 2014 GMT
  Signature algorithm: sha1WithRSAEncryption
  Public key algorithm: dsaEncryption
```



## show system commit

<b>Syntax</b>	show system commit
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the system commit history and any pending commit operation.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">clear system commit on page 289</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show system commit on page 885</a> <a href="#">show system commit (At a Particular Time) on page 885</a> <a href="#">show system commit (At the Next Reboot) on page 885</a> <a href="#">show system commit (Rollback Pending) on page 885</a> <a href="#">show system commit (QFX Series) on page 885</a>
<b>Output Fields</b>	<a href="#">Table 68 on page 884</a> describes the output fields for the <b>show system commit</b> command. Output fields are listed in the approximate order in which they appear.

**Table 68: show system commit Output Fields**

Field Name	Field Description
<b>Commit history</b>	Displays the last 50 commit operations listed, most recent to first. The identifier <b>rescue</b> designates a configuration created for recovery using the <b>request system configuration rescue save</b> command.
<b>Timestamp</b>	Date and time of the commit operation.
<b>Username</b>	User who executed the commit operation.
<b>Commit method</b>	Method used to execute the commit operation: <ul style="list-style-type: none"> <li>• <b>cli</b>—CLI interactive user performed the commit operation.</li> <li>• <b>Junos XML protocol</b>—Junos XML protocol client performed the commit operation.</li> <li>• <b>synchronize</b>—The <b>commit synchronize</b> command was performed on the other Routing Engine.</li> <li>• <b>snmp</b>—An SNMP <b>set</b> request caused the commit operation.</li> <li>• <b>button</b>—A button on the router or switch was pressed to commit a rescue configuration for recovery.</li> <li>• <b>autoinstall</b>—A configuration obtained through autoinstallation was committed.</li> <li>• <b>other</b>—When there is no login name associated with the session, the values for user and client default to root and other. For example, during a reboot after package installation, mgd commits the configuration as a system commit, and there is no login associated with the commit.</li> </ul>



## Sample Output

```
show system commit      user@host> show system commit
                        0  2003-07-28 19:14:04 PDT by root via other
                        1  2003-07-25 22:01:36 PDT by regress via cli
                        2  2003-07-25 22:01:32 PDT by regress via cli
                        3  2003-07-25 21:30:13 PDT by root via button
                        4  2003-07-25 13:46:48 PDT by regress via cli
                        5  2003-07-25 05:33:21 PDT by root via autoinstall
                        ...
                        rescue 2002-05-10 15:32:03 PDT by root via other

show system commit      user@host> show system commit
(At a Particular Time)  commit requested by root via cli at Tue May  7 15:59:00 2002

show system commit      user@host> show system commit
(At the Next Reboot)    commit requested by root via cli at reboot

show system commit      user@host> show system commit
(Rollback Pending)      0 2005-01-05 15:00:37 PST by root via cli commit confirmed, rollback in 3mins

show system commit      user@switch> show system commit
(QFX Series)            0 2011-11-25 19:17:49 PST by root via cli
```



## show system configuration archival

---

**Syntax**    show system configuration archival

**Release Information**    Introduced in Junos OS Release 7.6.  
Command introduced in Junos OS Release 9.0 for EX Series switches.  
Command introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Display directory and number of files queued for archival transfer.



**NOTE:** The [edit system configuration] hierarchy is not available on QFabric systems.

**Options**    This command has no options.

**Required Privilege Level**    maintenance

**List of Sample Output**    [show system configuration archival on page 886](#)

### Sample Output

```
show system configuration archival    user@host> show system configuration archival  
/var/transfer/config/:  
total 8
```



---

## show system configuration rescue

---

**Syntax**    show system configuration rescue

**Release Information**    Command introduced before Junos OS Release 7.4.  
Command introduced in Junos OS Release 9.0 for EX Series switches.  
Command introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Display a rescue configuration, if one exists.



.....  
**NOTE:** The [edit system configuration] hierarchy is not available on QFabric systems.  
.....

**Options**    This command has no options.

**Required Privilege Level**    maintenance

**Related Documentation**    • [show system configuration archival on page 886](#)

**List of Sample Output**    [show system configuration rescue on page 888](#)



## Sample Output

**show system  
configuration rescue**

```
user@switch> show system configuration rescue
version "7.3"; groups {
  global {
    system {
      host-name router1;
      domain-name customer.net;
      domain-search [ customer.net ];
      backup-router 192.168.124.254;
      name-server {
        172.17.28.11;
        172.17.28.101;
        172.17.28.100;
        172.17.28.10;
      }
      login {
        user regress {
          uid 928;
          class ;
          shell csh;
          authentication {
            encrypted-password "$1$kPU..$w.4FGRAGanJ8U4Yq6sbj7."; ##
SECRET-DATA
          }
        }
      }
      services {
        ftp;
        rlogin;
        rsh;
        telnet;
      }
    }
  }
}
....
```



## show system connections

<b>Syntax</b>	<pre>show system connections &lt;extensive&gt; &lt;all-chassis   all-lcc   lcc <i>number</i>   scc&gt; &lt;inet   inet6&gt; &lt;show-routing-instances&gt;</pre>
<b>Syntax (EX Series)</b>	<pre>show system connections &lt;extensive&gt; &lt;all-members&gt; &lt;inet   inet6&gt; &lt;local&gt; &lt;member <i>member-id</i>&gt; &lt;show-routing-instances&gt;</pre>
<b>Syntax (TX Matrix Router)</b>	<pre>show system connections &lt;extensive&gt; &lt;all-chassis   all-lcc   lcc <i>number</i>   scc&gt; &lt;inet   inet6&gt; &lt;show-routing-instances&gt;</pre>
<b>Syntax (TX Matrix Plus Router)</b>	<pre>show system connections &lt;extensive&gt; &lt;all-chassis   all-lcc   lcc <i>number</i>   sfc <i>number</i>&gt; &lt;inet   inet6&gt; &lt;show-routing-instances&gt;</pre>
<b>Syntax (MX Series Router)</b>	<pre>show system connections &lt;extensive&gt; &lt;all-members&gt; &lt;inet   inet6&gt; &lt;local&gt; &lt;member <i>member-id</i>&gt; &lt;show-routing-instances&gt;</pre>
<b>Syntax (QFX Series)</b>	<pre>show system connections &lt;extensive&gt; &lt;inet&gt; &lt;infrastructure <i>name</i>&gt; &lt;interconnect-device <i>name</i>&gt; &lt;node-group <i>name</i>&gt; &lt;show-routing-instances&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p>
<b>Description</b>	<p>Display information about the active IP sockets on the Routing Engine. Use this command to verify which servers are active on a system and what connections are currently in progress.</p>



- Options** **none**—Display information about all active IP sockets on the Routing Engine.
- extensive**—(Optional) Display exhaustive system process information, which, for TCP connections, includes the TCP control block. This option is useful for debugging TCP connections.
- all-chassis**—(TX Matrix and TX Matrix Plus routers only) (Optional) Display system connection activity for all the routers in the chassis.
- all-lcc**—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display system connection activity for all T640 routers (or line-card chassis) connected to the TX Matrix router. On a TX Matrix Plus router, display system connection activity for all T1600 routers (or line-card chassis) connected to the TX Matrix Plus router
- all-members**—(EX4200 switches and MX Series routers only) (Optional) Display system connection activity for all members of the Virtual Chassis configuration.
- inet | inet6**—(Optional) Display IPv4 connections or IPv6 connections, respectively.
- infrastructure *name***—(QFabric systems only) (Optional) Display system connection activity for the fabric control Routing Engines or fabric manager Routing Engines.
- interconnect-device *name***—(QFabric systems only) (Optional) Display system connection activity for the Interconnect device.
- lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display system connection activity for a specific T640 router that is connected to the TX Matrix router. On a TX Matrix Plus router, display system connection activity for a specific T1600 router that is connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.
- local**—(EX4200 switches and MX Series routers only) (Optional) Display system connection activity for the local Virtual Chassis member.
- member *member-id***—(EX4200 switches and MX Series routers only) (Optional) Display system connection activity for the specified member of the Virtual Chassis configuration. For EX4200 switches, replace ***member-id*** with a value from 0 through 9. For an MX Series Virtual Chassis, replace ***member-id*** with a value of 0 or 1.
- node-group *name***—(QFabric systems only) (Optional) Display system connection activity for the Node group.
- scc**—(TX Matrix routers only) (Optional) Display system connection activity for the TX Matrix router (or switch-card chassis).
- sfc**—(TX Matrix Plus routers only) (Optional) Display system connection activity for the TX Matrix Plus router (or switch-fabric chassis).
- show-routing-instances**—(Optional) Display routing instances.



**Additional Information** By default, when you issue the **show system connections** command on a TX Matrix or TX Matrix Plus master Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) master Routing Engines or T1600 (in a routing matrix based on a TX Matrix Plus router) master Routing Engines connected to it. Likewise, if you issue the same command on the TX Matrix or TX Matrix Plus backup Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) or T1600 (in a routing matrix based on the TX Matrix Plus router) backup Routing Engines that are connected to it.

**Required Privilege Level** view

**List of Sample Output** [show system connections on page 892](#)  
[show system connections extensive on page 892](#)  
[show system connections lcc \(TX Matrix Router\) on page 893](#)  
[show system connections show-routing-instances on page 894](#)  
[show system connections \(TX Matrix Plus Router\) on page 894](#)  
[show system connections sfc \(TX Matrix Plus Router\) on page 898](#)  
[show system connections show-routing-instances \(TX Matrix Plus Router\) on page 899](#)  
[show system connections \(QFX3500 Switch\) on page 905](#)

**Output Fields** [Table 69 on page 891](#) describes the output fields for the **show system connections** command. Output fields are listed in the approximate order in which they appear.

**Table 69: show system connections Output Fields**

Field Name	Field Description
<b>Proto</b>	Protocol of the socket: <b>IP</b> , <b>TCP</b> , or <b>UDP</b> for IPv4 or IPv6.
<b>Recv-Q</b>	Number of input packets received by the protocol and waiting to be processed by the application.
<b>Send-Q</b>	Number of output packets sent by the application and waiting to be processed by the protocol.
<b>Local Address</b>	Local address and port of the socket, separated by a period. An asterisk (*) indicates that the bound address is the wildcard address. Server sockets typically have the wildcard address and a well-known port bound to them.
<b>Foreign Address</b>	Foreign address and port of the socket, separated by a period. An asterisk (*) indicates that the address or port is a wildcard.
<b>Routing Instance</b>	(Displayed only when the <b>show-routing-instance</b> option is used.) Routing instances associated with active IP sockets on the Routing Engine.
<b>(state)</b>	For TCP, the protocol state of the socket.



## Sample Output

### show system connections

```

user@host> show system connections
Active Internet connections (including servers)
Proto Recv-Q Send-Q Local Address           Foreign Address          (state)
tcp      0      2 192.168.4.16.513        208.197.169.254.894     ESTABLISHED
tcp      0      0 192.168.4.16.513        208.197.169.195.945     ESTABLISHED
tcp      0      0 *.23                    *.*                       LISTEN
tcp      0      0 *.22                    *.*                       LISTEN
tcp      0      0 *.513                   *.*                       LISTEN
tcp00 *.514                *.*                       LISTEN
tcp 0 0*.21                    *.*                       LISTEN
tcp00 *.79                *.*                       LISTEN
tcp 00 *.1023                 *.*                       LISTEN
tcp 00 *.111                  *.*                       LISTEN
udp00192.168.4.16.1634    208.197.169.249.2049
udp00192.168.4.16.1627    208.197.169.254.2049
udp00192.168.4.16.1371    208.197.169.195.2049
udp00*.*                *.*
udp00*.9999              *.*
udp00 *.161              *.*
udp00192.168.4.16.1039    192.168.4.16.1023
udp00192.168.4.16.1038    192.168.4.16.1023
udp 00 192.168.4.16.1037    192.168.4.16.1023
udp00192.168.4.16.1036    192.168.4.16.1023
udp00*.1022              *.*
udp00*.1023              *.*
udp00*.111               *.*
udp00*.*                 *.*

```

### show system connections extensive

```

user@host> show system connections extensive
Active Internet connections (including servers)
Proto Recv-Q Send-Q Local Address           Foreign Address          (state)
tcp4      0      6 192.168.187.15.23      172.27.133.138.3013     ESTABLISHED
sndsbcc: 6 sndsbmbcnt: 256 sndsbmbmax: 272000
sndsblowat: 2048 sndsbhiwat: 34000
rcvsbcc: 0 rcvsbmbcnt: 0 rcvsbmbmax: 533120
rcvsblowat: 1 rcvsbhiwat: 66640
proc id: 0 proc name:
iss: 2566994072 sndup: 2566994491
snduna: 2566994491 sndnxt: 2566994494 sndwnd: 64094
sndmax: 2566994494 sndcwnd: 6589 sndssthresh: 2720
irs: 236981199 rcvup: 236981325
rcvnxt: 236981327 rcvadv: 237046862 rcvwnd: 66640
rtt: 140058623 srtt: 15519 rttv: 908
rxtcur: 1200 rxtshift: 0 rtseq: 2566994491
rttmin: 1000 mss: 1360
flags: SACK_PERMIT [0x2000200]
tcp4      0      0 10.255.165.93.179      10.255.165.203.65141     ESTABLISHED
sndsbcc: 0 sndsbmbcnt: 0 sndsbmbmax: 131072
sndsblowat: 2048 sndsbhiwat: 16384
rcvsbcc: 0 rcvsbmbcnt: 0 rcvsbmbmax: 131072
rcvsblowat: 1 rcvsbhiwat: 16384
proc id: 0 proc name:
iss: 2555961065 sndup: 2555995917

```



```

snduna: 2555995917      sndnxt: 2555995917      sndwnd:      16384
sndmax: 2555995917      sndcwnd:      1000      sndssthresh: 1073725440
irs: 2123825753        rcvup: 2123860681
rcvnxt: 2123860681      rcvadv: 2123877065      rcvwnd:      16384
rtt:      0            srtt:      3309            rttv:      72
rxtcur:      1200      rxtshift:      0            rtseq: 2555995898
rttmin:      1000      mss:      500
flags: REQ_SCALE RCVD_SCALE REQ_TSTMP RCVD_TSTMP SACK_PERMIT [0x3e0]
tcp4      0      0 10.255.165.203.65141
10.255.165.93.179      ESTABLISHED
sndsbcc:      0      sndsbmbcnt:      0      sndsbmbmax:      131072
sndsblowat:      2048      sndsbhiwat:      16384
rcvsbcc:      0      rcvsbmbcnt:      0      rcvsbmbmax:      131072
rcvsblowat:      1      rcvsbhiwat:      16384
proc id:      5022      proc name:      rpd
iss: 2123825753      sndup: 2123860662
snduna: 2123860681      sndnxt: 2123860681      sndwnd:      16384
sndmax: 2123860681      sndcwnd:      1000      sndssthresh: 1073725440
irs: 2555961065      rcvup: 2555995917
rcvnxt: 2555995917      rcvadv: 2556012301      rcvwnd:      16384
rtt:      0            srtt:      3279            rttv:      22
rxtcur:      1200      rxtshift:      0            rtseq: 2123860662
rttmin:      1000      mss:      500
flags: REQ_SCALE RCVD_SCALE REQ_TSTMP RCVD_TSTMP SACK_PERMIT [0x100003e0]
tcp4      0      0 10.255.165.203.179
10.255.165.113.52404      ESTABLISHED
sndsbcc:      0      sndsbmbcnt:      0      sndsbmbmax:      131072
sndsblowat:      2048      sndsbhiwat:      16384
rcvsbcc:      0      rcvsbmbcnt:      0      rcvsbmbmax:      131072
rcvsblowat:      1      rcvsbhiwat:      16384
proc id:      0      proc name:
iss: 1109297190      sndup: 1109332099
snduna: 1109332118      sndnxt: 1109332118      sndwnd:      16384
sndmax: 1109332118      sndcwnd:      1000      sndssthresh: 1073725440
irs: 1476831634      rcvup: 1476866449
rcvnxt: 1476866449      rcvadv: 1476882833      rcvwnd:      16384
rtt:      0            srtt:      3235            rttv:      18
rxtcur:      1200      rxtshift:      0            rtseq: 1109332099
rttmin:      1000      mss:      500
flags: REQ_SCALE RCVD_SCALE REQ_TSTMP RCVD_TSTMP SACK_PERMIT [0x3e0]

```

show system  
connections lcc (TX  
Matrix Router)

user@host> show system connections lcc 2

lcc2-re0:

```

-----
Active Internet connections (including servers)
Proto Recv-Q Send-Q Local Address      Foreign Address    (state)
tcp4      0      0 192.168.66.131.1342 192.168.66.130.23 ESTABLISHED
tcp4      0      0 192.168.66.131.2059 192.168.66.130.23 ESTABLISHED
tcp4      0      0 192.168.66.131.4571 192.168.66.130.23 ESTABLISHED
tcp4      0      0 192.168.66.131.2496 192.168.66.130.23 ESTABLISHED
tcp4      0      0 *.3221             *.*                LISTEN
tcp4      0      0 *.23                *.*                LISTEN
tcp4      0      0 *.22                *.*                LISTEN
tcp4      0      0 *.514               *.*                LISTEN
tcp4      0      0 *.513               *.*                LISTEN
tcp4      0      0 *.21                *.*                LISTEN
tcp4      0      0 *.79                *.*                LISTEN
tcp4      0      0 *.6234              *.*                LISTEN
udp4      0      0 *.514               *.*
udp4      0      0 *.6333              *.*

```



show system  
connections  
show-routing-instances

```

user@host> show system connections show-routing-instances
Active Internet connections (including servers) (including routing-instances)
Proto Recv-Q Send-Q Local Address          Foreign Address         Routing Instance
      (state)
tcp4      0      0 192.168.69.204.23      172.17.28.19.4267      default
      ESTABLISHED
tcp4      0      0 192.168.69.204.58540   10.209.7.138.23        default
      ESTABLISHED
tcp4      0      0 192.168.69.204.23      172.17.28.19.1098      default
      ESTABLISHED
tcp4      0      0 192.168.7.1.57668      192.168.9.1.179        default
      ESTABLISHED
tcp4      0      0 192.168.7.1.179        192.168.8.1.49209      default
      ESTABLISHED
tcp4      0      0 128.0.0.1.6234         128.0.3.17.1024
__juniper_private1__ ESTABLISHED
tcp4      0      0 128.0.0.4.9000         128.0.0.4.59103
__juniper_private1__ ESTABLISHED
tcp4      0      0 128.0.0.4.59103        128.0.0.4.9000
__juniper_private1__ ESTABLISHED
tcp4      0      0 *.32012                *.*
__juniper_private1__ LISTEN
tcp4      0      0 *.9000                  *.*
__juniper_private1__ LISTEN
tcp4      0      0 *.33007                 *.*
__juniper_private2__ LISTEN
tcp46     0      0 *.179                   *.*                     default
      LISTEN
tcp4      0      0 *.179                   *.*                     default
      LISTEN
tcp4      0      0 *.6154                  *.*
__juniper_private1__ LISTEN
tcp4      0      0 *.6153                  *.*
__juniper_private1__ LISTEN
tcp4      0      0 *.7000                   *.*
__juniper_private1__ LISTEN
tcp4      0      0 *.6152                   *.*
__juniper_private1__ LISTEN
tcp4      0      0 *.6156                   *.*
__juniper_private1__ LISTEN
tcp4      0      0 *.33005                  *.*
__juniper_private2__ LISTEN
tcp4      0      0 *.31343                  *.*
__juniper_private1__ LISTEN
tcp4      0      0 *.31341                  *.*
__juniper_private1__ LISTEN
tcp4      0      0 *.32003                  *.*
__juniper_private2__ LISTEN
tcp4      0      0 *.666                    *.*
__juniper_private1__ LISTEN
tcp4      0      0 *.38                     *.*
__juniper_private1__ LISTEN
tcp4      0      0 *.3221                   *.*                     default
      LISTEN

```

show system  
connections (TX Matrix  
Plus Router)

```

user@host> show system connections
sfc0-re0:
-----
Active Internet connections (including servers)
Proto Recv-Q Send-Q Local Address          Foreign Address

```



```

                                (state)
tcp4      0      3 192.168.178.11.23
172.17.28.19.3565 ESTABLISHED
tcp4      0      0 192.168.178.11.23
172.17.28.204.62719 ESTABLISHED
tcp4      0      0 192.168.178.11.23
192.168.69.199.51255 ESTABLISHED
tcp4      0      0 192.168.178.11.23
172.24.26.227.42860 ESTABLISHED
tcp4      0      0 *.6156
                                LISTEN
tcp4      0      0 162.0.0.4.32012
                                ESTABLISHED 162.0.0.5.58935
tcp4      0      0 *.32012
                                LISTEN
tcp4      0      0 *.33007
                                LISTEN
tcp4      0      0 *.666
                                LISTEN
tcp4      0      0 162.0.0.4.6161
                                ESTABLISHED 162.0.0.5.62026
tcp4      0      0 *.33005
                                LISTEN
tcp4      0      0 162.0.0.4.9000
                                ESTABLISHED 162.0.0.4.51611
tcp4      0      0 162.0.0.4.51611
                                ESTABLISHED 162.0.0.4.9000
tcp4      0      0 *.6151
                                LISTEN
tcp4      0      0 *.6154
                                LISTEN
tcp4      0      0 *.6153
                                LISTEN
tcp4      0      0 *.31343
                                LISTEN
tcp4      0      0 *.31341
                                LISTEN
tcp4      0      0 *.9000
                                LISTEN
tcp4      0      0 *.6152
                                LISTEN
tcp4      0      0 *.32003
                                LISTEN
tcp4      0      0 *.33009
                                LISTEN
tcp4      0      0 *.3221
                                LISTEN
tcp4      0      0 *.23
                                LISTEN
tcp4      0      0 *.22
                                LISTEN
tcp4      0      0 *.514
                                LISTEN
tcp4      0      0 *.513
                                LISTEN
tcp4      0      0 *.21
                                LISTEN
tcp4      0      0 *.79
                                LISTEN
tcp4      0      0 *.514
                                LISTEN

```



```

tcp4      0      0 *.513          *.*
          LISTEN
tcp4      0      0 *.6234         *.*
          LISTEN
udp4      0      0 127.0.0.1.123  *.*
udp4      0      0 10.255.178.11.123 *.*
udp4      0      0 *.123          *.*
udp46     0      0 *.514          *.*
udp4      0      0 *.514          *.*
udp46     0      0 *.62027        *.*
udp4      0      0 *.59363        *.*
udp4      0      0 *.31342        *.*
udp46     0      0 *.161          *.*
udp4      0      0 *.161          *.*
udp4      0      0 *.31340        *.*
udp4      0      0 *.31340        *.*
udp46     0      0 *.49152        *.*
udp46     0      0 *.4784         *.*
udp46     0      0 *.3784         *.*
udp4      0      0 *.49152        *.*
udp4      0      0 *.4784         *.*
udp4      0      0 *.3784         *.*
udp4      0      0 *.6333         *.*
ip4       0      0 *.*            *.*
ip4       0      0 *.*            *.*

```

lcc0-re0:

```

-----
Active Internet connections (including servers)
Proto Recv-Q Send-Q Local Address           Foreign Address
          (state)
tcp4      0      0 192.168.178.3.23      ESTABLISHED
172.24.26.227.50399
tcp4      0      0 *.6234              *.*
          LISTEN
tcp4      0      0 *.7000              *.*
          LISTEN
tcp4      0      0 *.9000              *.*
          LISTEN
tcp4      0      0 *.33009             *.*
          LISTEN
tcp4      0      0 *.3221              *.*
          LISTEN
tcp4      0      0 *.23                *.*
          LISTEN
tcp4      0      0 *.22                *.*
          LISTEN
tcp4      0      0 *.514               *.*
          LISTEN
tcp4      0      0 *.513               *.*
          LISTEN
tcp4      0      0 *.21                *.*
          LISTEN
tcp4      0      0 *.79                *.*
          LISTEN
tcp4      0      0 *.514               *.*
          LISTEN
tcp4      0      0 *.513               *.*
          LISTEN
udp46     0      0 *.514               *.*
udp4      0      0 *.514               *.*

```



```

udp46      0      0 *.59924      *.*
udp4       0      0 *.59412      *.*
udp46      0      0 *.161        *.*
udp4       0      0 *.161        *.*
udp4       0      0 *.31342      *.*
udp4       0      0 *.6333       *.*

```

lcc1-re0:

```

-----
Active Internet connections (including servers)
Proto Recv-Q Send-Q Local Address           Foreign Address
      (state)
tcp4      0      0 *.6234              *.*
      LISTEN
tcp4      0      0 *.7000              *.*
      LISTEN
tcp4      0      0 *.9000              *.*
      LISTEN
tcp4      0      0 *.3221              *.*
      LISTEN
tcp4      0      0 *.23                *.*
      LISTEN
tcp4      0      0 *.22                *.*
      LISTEN
tcp4      0      0 *.514               *.*
      LISTEN
tcp4      0      0 *.513               *.*
      LISTEN
tcp4      0      0 *.21                *.*
      LISTEN
tcp4      0      0 *.79                *.*
      LISTEN
tcp4      0      0 *.514               *.*
      LISTEN
tcp4      0      0 *.513               *.*
      LISTEN
tcp4      0      0 *.33009             *.*
      LISTEN
udp46      0      0 *.514              *.*
udp4       0      0 *.514              *.*
udp46      0      0 *.59924            *.*
udp4       0      0 *.59412            *.*
udp4       0      0 *.31342            *.*
udp46      0      0 *.161              *.*
udp4       0      0 *.161              *.*
udp4       0      0 *.6333             *.*

```

lcc2-re0:

```

-----
Active Internet connections (including servers)
Proto Recv-Q Send-Q Local Address           Foreign Address
      (state)
tcp4      0      0 *.6234              *.*
      LISTEN
tcp4      0      0 *.7000              *.*
      LISTEN
tcp4      0      0 *.9000              *.*
      LISTEN
tcp4      0      0 *.33009             *.*
      LISTEN
tcp4      0      0 *.3221              *.*

```



```

tcp4      0      0 *.23      LISTEN      *. *
tcp4      0      0 *.22      LISTEN      *. *
tcp4      0      0 *.514     LISTEN      *. *
...

```

### show system connections sfc (TX Matrix Plus Router)

```

user@host> show system connections sfc 0
sfc0-re0:

```

```

-----
Active Internet connections (including servers)
Proto Recv-Q Send-Q Local Address           Foreign Address
      (state)
tcp4      0      0 162.0.0.4.514           132.0.0.4.952
      TIME_WAIT
tcp4      0      0 162.0.0.4.514           131.0.0.4.694
      TIME_WAIT
tcp4      0      0 162.0.0.4.514           130.0.0.4.860
      TIME_WAIT
tcp4      0      0 162.0.0.4.514           129.0.0.4.716
      TIME_WAIT
tcp4      0      0 162.0.0.4.996           132.0.0.4.514
      TIME_WAIT
tcp4      0      0 162.0.0.4.798           131.0.0.4.514
      TIME_WAIT
tcp4      0      0 162.0.0.4.995           130.0.0.4.514
      TIME_WAIT
tcp4      0      0 162.0.0.4.895           129.0.0.4.514
      TIME_WAIT
tcp4      0      0 192.168.178.11.21       172.17.28.204.64662    TIME_WAIT
tcp4      0      0 192.168.178.11.21       172.17.28.204.51612    TIME_WAIT
tcp4      0      0 *.6156                  *. *
      LISTEN
tcp4      0      0 *.9000                   *. *
      LISTEN
tcp4      0      0 *.666                    *. *
      LISTEN
tcp4      0      2 192.168.178.11.23       172.17.28.19.3565      ESTABLISHED
tcp4      0      0 192.168.178.11.23       172.17.28.204.62719    ESTABLISHED
tcp4      0      0 192.168.178.11.23       192.168.69.199.51255    ESTABLISHED
tcp4      0      0 192.168.178.11.23       172.24.26.227.42860    ESTABLISHED
tcp4      0      0 162.0.0.4.32012         162.0.0.5.58935
      ESTABLISHED
tcp4      0      0 *.32012                  *. *
      LISTEN
tcp4      0      0 *.33007                  *. *
      LISTEN
tcp4      0 1432 162.0.0.4.6161          162.0.0.5.62026
      ESTABLISHED
tcp4      0      0 *.33005                  *. *
      LISTEN
tcp4      0      0 162.0.0.4.9000          162.0.0.4.51611
      FIN_WAIT_2
tcp4      0      0 162.0.0.4.51611        162.0.0.4.9000

```



```

tcp4      0      0 *.6151      CLOSE_WAIT      *. *
tcp4      0      0 *.6154      LISTEN          *. *
tcp4      0      0 *.6153      LISTEN          *. *
tcp4      0      0 *.31343     LISTEN          *. *
tcp4      0      0 *.31341     LISTEN          *. *
tcp4      0      0 *.6152      LISTEN          *. *
tcp4      0      0 *.32003     LISTEN          *. *
tcp4      0      0 *.33009     LISTEN          *. *
tcp4      0      0 *.3221      LISTEN          *. *
tcp4      0      0 *.23        LISTEN          *. *
tcp4      0      0 *.22        LISTEN          *. *
tcp4      0      0 *.514       LISTEN          *. *
tcp4      0      0 *.513       LISTEN          *. *
tcp4      0      0 *.21        LISTEN          *. *
tcp4      0      0 *.79        LISTEN          *. *
tcp4      0      0 *.514       LISTEN          *. *
tcp4      0      0 *.513       LISTEN          *. *
tcp4      0      0 *.6234      LISTEN          *. *
udp4      0      0 127.0.0.1.123 *. *
udp4      0      0 10.255.178.11.123 *. *
udp4      0      0 *.123       *. *
udp46     0      0 *.514       *. *
udp4      0      0 *.514       *. *
udp46     0      0 *.50895     *. *
udp4      0      0 *.50794     *. *
udp4      0      0 *.31342     *. *
udp46     0      0 *.161       *. *
udp4      0      0 *.161       *. *
udp4      0      0 *.31340     *. *
udp4      0      0 *.31340     *. *
udp46     0      0 *.49152     *. *
udp46     0      0 *.4784      *. *
udp46     0      0 *.3784      *. *
udp4      0      0 *.49152     *. *
udp4      0      0 *.4784      *. *
udp4      0      0 *.3784      *. *
udp4      0      0 *.6333      *. *
ip4       104    0 *. *        *. *
ip4       0      0 *. *        *. *
ip4       0      0 *. *        *. *

```

```
user@host> show system connections show-routing-instances
```



`show system  
connections`

`show-routing-instances`

`sfc0-re0:`

-----

Active Internet connections (including servers) (including routing-instances)

Proto	Recv-Q	Send-Q	Local Address	Foreign Address
-------	--------	--------	---------------	-----------------



(TX Matrix Plus  
Router)

				Routing Instance	(state)	
tcp4	0	0	*.6156			*.*
tcp4	0	0	*.9000	__juniper_private1__	LISTEN	*.*
tcp4	0	0	*.666	__juniper_private1__	LISTEN	*.*
tcp4	0	0		__juniper_private1__	LISTEN	
tcp4	0	2	192.168.178.11.23			
172.17.28.19.3565				default		ESTABLISHED
tcp4	0	0	192.168.178.11.23			
172.17.28.204.62719				default		ESTABLISHED
tcp4	0	0	192.168.178.11.23			
192.168.69.199.51255				default		ESTABLISHED
tcp4	0	0	192.168.178.11.23			
172.24.26.227.42860				default		ESTABLISHED
tcp4	0	0	162.0.0.4.32012			162.0.0.5.58935
				__juniper_private1__	ESTABLISHED	
tcp4	0	0	*.32012	__juniper_private1__	LISTEN	*.*
tcp4	0	0	*.33007	__juniper_private1__	LISTEN	*.*
				__juniper_private2__	LISTEN	
tcp4	0	0	162.0.0.4.6161			162.0.0.5.62026
				__juniper_private1__	ESTABLISHED	
tcp4	0	0	*.33005	__juniper_private2__	LISTEN	*.*
tcp4	0	0	162.0.0.4.9000			162.0.0.4.51611
				__juniper_private1__	FIN_WAIT_2	
tcp4	0	0	162.0.0.4.51611			162.0.0.4.9000
				__juniper_private1__	CLOSE_WAIT	
tcp4	0	0	*.6151	__juniper_private1__	LISTEN	*.*
tcp4	0	0	*.6154	__juniper_private1__	LISTEN	*.*
				__juniper_private1__	LISTEN	
tcp4	0	0	*.6153	__juniper_private1__	LISTEN	*.*
tcp4	0	0	*.31343	__juniper_private1__	LISTEN	*.*
tcp4	0	0	*.31341	__juniper_private1__	LISTEN	*.*
				__juniper_private1__	LISTEN	
tcp4	0	0	*.6152	__juniper_private1__	LISTEN	*.*
				__juniper_private1__	LISTEN	
tcp4	0	0	*.32003	__juniper_private2__	LISTEN	*.*
tcp4	0	0	*.33009	__juniper_private2__	LISTEN	*.*
				__juniper_private2__	LISTEN	
tcp4	0	0	*.3221			*.*
				default	LISTEN	
tcp4	0	0	*.23			*.*
				default	LISTEN	
tcp4	0	0	*.22			*.*
				default	LISTEN	
tcp4	0	0	*.514			*.*
				default	LISTEN	
tcp4	0	0	*.513			*.*
				default	LISTEN	
tcp4	0	0	*.21			*.*
				default	LISTEN	
tcp4	0	0	*.79			*.*
				default	LISTEN	
tcp4	0	0	*.514			*.*
				__juniper_private1__	LISTEN	



```

tcp4      0      0 *.513      __juniper_private1__ LISTEN      *. *
tcp4      0      0 *.6234     __juniper_private1__ LISTEN      *. *
udp4      0      0 127.0.0.1.123 default      *. *
udp4      0      0 10.255.178.11.123 default      *. *
udp4      0      0 *.123      default      *. *
udp46     0      0 *.514      default      *. *
udp4      0      0 *.514      default      *. *
udp46     0      0 *.50895    default      *. *
udp4      0      0 *.50794    default      *. *
udp4      0      0 *.31342    __juniper_private1__ *. *
udp46     0      0 *.161      default      *. *
udp4      0      0 *.161      default      *. *
udp4      0      0 *.31340    __juniper_private2__ *. *
udp4      0      0 *.31340    __juniper_private1__ *. *
udp46     0      0 *.49152    default      *. *
udp46     0      0 *.4784     default      *. *
udp46     0      0 *.3784     default      *. *
udp4      0      0 *.49152    default      *. *
udp4      0      0 *.4784     default      *. *
udp4      0      0 *.3784     default      *. *
udp4      0      0 *.6333     __juniper_private1__ *. *
ip4       0      0 *. *       default      *. *
ip4       0      0 *. *       default      *. *
ip4       0      0 *. *       default      *. *

```

lcc0-re0:

```

-----
Active Internet connections (including servers) (including routing-instances)
Proto Recv-Q Send-Q Local Address           Routing Instance      (state)      Foreign Address
tcp4      0      0 *.7000     __juniper_private1__ LISTEN      *. *
tcp4      0      0 192.168.178.3.23      default              ESTABLISHED  *. *
tcp4      0      0 *.6234     __juniper_private1__ LISTEN      *. *
tcp4      0      0 *.9000

```



```

tcp4      0      0 *.33009    __juniper_private1__ LISTEN    *. *
tcp4      0      0 *.3221     __juniper_private2__ LISTEN    *. *
tcp4      0      0 *.23       default        LISTEN    *. *
tcp4      0      0 *.22       default        LISTEN    *. *
tcp4      0      0 *.514      default        LISTEN    *. *
tcp4      0      0 *.513      default        LISTEN    *. *
tcp4      0      0 *.21       default        LISTEN    *. *
tcp4      0      0 *.79       default        LISTEN    *. *
tcp4      0      0 *.514      default        LISTEN    *. *
tcp4      0      0 *.513      __juniper_private1__ LISTEN    *. *
tcp4      0      0 *.513      __juniper_private1__ LISTEN    *. *
udp46     0      0 *.514      default        *. *
udp4      0      0 *.514      default        *. *
udp46     0      0 *.59924    default        *. *
udp4      0      0 *.59412    default        *. *
udp46     0      0 *.161      default        *. *
udp4      0      0 *.161      default        *. *
udp4      0      0 *.31342    default        *. *
udp4      0      0 *.6333     __juniper_private1__ *. *
udp4      0      0 *.6333     __juniper_private1__

```

```
lcc1-re0:
```

```

-----
Active Internet connections (including servers) (including routing-instances)
Proto Recv-Q Send-Q Local Address           Foreign Address
      Routing Instance      (state)
tcp4      0      0 *.7000          *. *
tcp4      0      0 *.6234          __juniper_private1__ LISTEN    *. *
tcp4      0      0 *.9000          __juniper_private1__ LISTEN    *. *
tcp4      0      0 *.3221          __juniper_private1__ LISTEN    *. *
tcp4      0      0 *.23            default        LISTEN    *. *
tcp4      0      0 *.22            default        LISTEN    *. *
tcp4      0      0 *.514           default        LISTEN    *. *
tcp4      0      0 *.513           default        LISTEN    *. *
tcp4      0      0 *.21            default        LISTEN    *. *

```



tcp4	0	0	*.79	default	LISTEN	*.*
tcp4	0	0	*.514	__juniper_private1__	LISTEN	*.*
tcp4	0	0	*.513	__juniper_private1__	LISTEN	*.*
tcp4	0	0	*.33009	__juniper_private2__	LISTEN	*.*
udp46	0	0	*.514	default		*.*
udp4	0	0	*.514	default		*.*
udp46	0	0	*.59924	default		*.*
udp4	0	0	*.59412	default		*.*
udp4	0	0	*.31342	__juniper_private1__		*.*
udp46	0	0	*.161	default		*.*
udp4	0	0	*.161	default		*.*
udp4	0	0	*.6333	__juniper_private1__		*.*

lcc2-re0:

-----

Active Internet connections (including servers) (including routing-instances)

Proto	Recv-Q	Send-Q	Local Address	Routing Instance	(state)	Foreign Address
-------	--------	--------	---------------	------------------	---------	-----------------

tcp4	0	0	*.7000	__juniper_private1__	LISTEN	*.*
tcp4	0	0	*.6234	__juniper_private1__	LISTEN	*.*
tcp4	0	0	*.9000	__juniper_private1__	LISTEN	*.*
tcp4	0	0	*.33009	__juniper_private2__	LISTEN	*.*
tcp4	0	0	*.3221	default	LISTEN	*.*
tcp4	0	0	*.23	default	LISTEN	*.*
tcp4	0	0	*.22	default	LISTEN	*.*
tcp4	0	0	*.514	default	LISTEN	*.*
tcp4	0	0	*.513	default	LISTEN	*.*
tcp4	0	0	*.21	default	LISTEN	*.*
tcp4	0	0	*.79	default	LISTEN	*.*
tcp4	0	0	*.514	__juniper_private1__	LISTEN	*.*
tcp4	0	0	*.513	__juniper_private1__	LISTEN	*.*
udp46	0	0	*.514	default		*.*
udp4	0	0	*.514	default		*.*
udp4	0	0	*.31342			*.*



```

udp46      0      0 *.62103    __juniper_private1__
default
udp4        0      0 *.59924    default
default
udp46      0      0 *.161      default
default
udp4        0      0 *.161      default
default
udp4        0      0 *.6333     __juniper_private1__

lcc3-re0:
-----
Active Internet connections (including servers) (including routing-instances)
Proto Recv-Q Send-Q Local Address           Foreign Address
      Routing Instance      (state)
tcp4      0      0 *.7000      __juniper_private1__ LISTEN      *.
tcp4      0      0 *.6234      __juniper_private1__ LISTEN      *.
tcp4      0      0 *.9000      __juniper_private1__ LISTEN      *.
tcp4      0      0 *.33009     __juniper_private1__ LISTEN      *.
tcp4      0      0 *.3221      __juniper_private2__ LISTEN      *.
tcp4      0      0 *.23        default          LISTEN      *.
tcp4      0      0 *.22        default          LISTEN      *.
tcp4      0      0 *.514       default          LISTEN      *.
tcp4      0      0 *.513       default          LISTEN      *.
tcp4      0      0 *.21        default          LISTEN      *.
tcp4      0      0 *.79        default          LISTEN      *.
tcp4      0      0 *.514       __juniper_private1__ LISTEN      *.
tcp4      0      0 *.513       __juniper_private1__ LISTEN      *.
udp46     0      0 *.514       default          *.
udp4       0      0 *.514       default          *.
udp46     0      0 *.62103     default          *.
udp4       0      0 *.59924     default          *.
udp4       0      0 *.31342     __juniper_private1__ *.
udp46     0      0 *.161       default          *.
udp4       0      0 *.161       default          *.
udp4       0      0 *.6333      __juniper_private1__

```

```
user@switch> show system connections
```



**show system  
connections  
(QFX3500 Switch)**

```

Active Internet connections (including servers)
Proto Recv-Q Send-Q Local Address           Foreign Address
      (state)
tcp4      0      0 10.94.204.110.23        ESTABLISHED
172.17.28.19.1308
tcp4      0      0 128.0.0.1.6234          128.0.0.1.65142
      ESTABLISHED
tcp4      0      0 128.0.0.1.65142         128.0.0.1.6234
      ESTABLISHED
tcp4      0      0 128.0.0.1.33003         128.0.0.1.61441
      ESTABLISHED
tcp4      0      0 128.0.0.1.61441         128.0.0.1.33003
      ESTABLISHED
tcp46     0      0 *.179                   *.*
      LISTEN
tcp4      0      0 *.179                   *.*
      LISTEN
tcp4      0      0 128.0.0.16.9000         128.0.0.16.50970
      ESTABLISHED
tcp4      0      0 128.0.0.16.50970       128.0.0.16.9000
      ESTABLISHED
tcp4      0      0 *.38                    *.*
      LISTEN
tcp4      0      0 *.3491                  *.*
      LISTEN
tcp4      0      0 *.6156                  *.*
      LISTEN
tcp4      0      0 128.0.0.1.33001         128.0.0.1.59437
      ESTABLISHED
tcp4      0      0 128.0.0.1.59437        128.0.0.1.33001
      ESTABLISHED
tcp4      0      0 128.0.0.1.33023        128.0.0.1.63605
      ESTABLISHED
tcp4      0      0 128.0.0.1.63605        128.0.0.1.33023
      ESTABLISHED
tcp4      0      0 128.0.0.1.33001        128.0.0.1.63830
      ESTABLISHED
tcp4      0      0 128.0.0.1.63830        128.0.0.1.33001
      ESTABLISHED
tcp4      0      0 *.667                   *.*
      LISTEN
tcp4      0      0 *.6156                  *.*
      LISTEN
tcp4      0      0 128.0.0.1.7000         128.0.0.1.51580
      ESTABLISHED
tcp4      0      0 128.0.0.1.51580        128.0.0.1.7000
      ESTABLISHED
tcp4      0      0 128.0.0.1.6234         128.0.0.1.53646
      ESTABLISHED
tcp4      0      0 *.33001                 *.*
      LISTEN
tcp4      0      0 *.33003                 *.*
      LISTEN
tcp4      0      0 128.0.0.1.53646        128.0.0.1.6234
      ESTABLISHED
tcp4      0      0 128.0.0.16.9000        128.0.0.16.63454
      ESTABLISHED
tcp4      0      0 128.0.0.16.63454       128.0.0.16.9000
      ESTABLISHED
tcp4      0      0 *.666                   *.*
      LISTEN

```



tcp4	0	0	*.7000		*.*
				LISTEN	
tcp4	0	0	*.51627		*.*
				LISTEN	
tcp4	0	0	*.3492		*.*
				LISTEN	
tcp4	0	0	*.33023		*.*
				LISTEN	
tcp4	0	0	*.33013		*.*
				LISTEN	
tcp4	0	0	*.7202		*.*
				LISTEN	
tcp4	0	0	*.6151		*.*
				LISTEN	
tcp4	0	0	*.9000		*.*
				LISTEN	
tcp4	0	0	*.6161		*.*
				LISTEN	
tcp4	0	0	*.6011		*.*
				LISTEN	
tcp4	0	0	*.3221		*.*
				LISTEN	
tcp4	0	0	*.23		*.*
				LISTEN	
tcp4	0	0	*.22		*.*
				LISTEN	
tcp4	0	0	*.514		*.*
				LISTEN	
tcp4	0	0	*.513		*.*
				LISTEN	
tcp4	0	0	*.21		*.*
				LISTEN	
tcp4	0	0	*.79		*.*
				LISTEN	
tcp4	0	0	*.514		*.*
				LISTEN	
tcp4	0	0	*.513		*.*
				LISTEN	
tcp4	0	0	*.1127		*.*
				LISTEN	
tcp4	0	0	*.1129		*.*
				LISTEN	
tcp4	0	0	*.1128		*.*
				LISTEN	
tcp4	0	0	*.6234		*.*
				LISTEN	
udp46	0	0	*.514		*.*
udp4	0	0	*.514		*.*
udp4	0	0	128.0.0.1.123		*.*
udp46	0	0	*.53344		*.*
udp4	0	0	*.54261		*.*
udp46	0	0	*.161		*.*
udp4	0	0	*.161		*.*
udp4	0	0	*.31342		*.*
udp4	0	0	*.59137		*.*
udp4	0	0	*.*		*.*
udp46	0	0	*.49152		*.*
udp46	0	0	*.4784		*.*
udp46	0	0	*.3784		*.*
udp4	0	0	*.49152		*.*
udp4	0	0	*.4784		*.*



udp4	0	0	*.3784	*.*
udp4	0	0	10.255.204.110.123	*.*
udp4	0	0	*.123	*.*
udp4	0	0	*.67	*.*
udp4	0	0	*.6333	*.*
udp4	0	0	*.2293	*.*
ip4	0	0	*.*	*.*
ip4	0	0	*.*	*.*
ip4	0	0	*.*	*.*



## show system core-dumps

<b>Syntax</b>	show system core-dumps <brief   detail> <core-filename> <core-file-info>
<b>Syntax (EX Series Switches)</b>	show system core-dumps <all-members> <brief   detail> <core-filename> <core-file-info> <local> <member <i>member-id</i> >
<b>Syntax (TX Matrix Router)</b>	show system core-dumps <all-chassis   all-lcc   lcc <i>number</i>   scc> <brief   detail> <core-filename> <core-file-info>
<b>Syntax (TX Matrix Plus Router)</b>	show system core-dumps <all-chassis   all-lcc   lcc <i>number</i>   sfc <i>number</i> > <brief   detail> <core-filename> <core-file-info>
<b>Syntax (QFX Series)</b>	show system core-dumps <brief   detail> <component ( <i>UUID</i>   <i>serial number</i>   all)> <core-file-info component ( <i>UUID</i>   <i>serial number</i> ) core-file-name> <display-period ( <i>hours</i>   <i>minutes</i>   <i>seconds</i> )> <display-order> <kernel-crashinfo component ( <i>UUID</i>   <i>serial number</i> )> <repository (core   log)>
<b>Release Information</b>	Command introduced before Junos OS Release 8.5. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Show core files on all routers or switches running Junos OS. You can use the <b>show system core-dumps</b> command to show a list of system core files created when the router or switch has failed. This command can be useful for diagnostic purposes. Each list item includes the file permissions, number of links, owner, group, size, modification date, and path and filename. On a QFabric system, you can view core-dump files on individual QFabric system devices as well as on the entire QFabric system.  You can use the option <b>core-filename</b> and its options <b>core-file-info</b> , <b>brief</b> , and <b>detail</b> to display more information about the specified core-dump files.
<b>Options</b>	<b>none</b> —Display a list of all existing core-dump files.



**all-chassis**—(TX Matrix and TX Matrix Plus routers only) (Optional) On a routing matrix based on a TX Matrix router, display system core files for the TX Matrix router switch-card chassis [SCC] and all the T640 routers [LCCs] connected to the TX Matrix router.

On a routing matrix based on a TX Matrix Plus router, display system core files for the TX Matrix Plus router (switch-fabric chassis [SFC]) and all the T1600 routers [LCCs] connected to the TX Matrix Plus router.

**<all-lcc | lcc number>**—(TX Matrix and TX Matrix Plus routers only) (Optional) On a routing matrix based on the TX Matrix router, display core dump files for all T640 routers (line-card chassis [LCCs]) or a specific T640 router [LCC] connected to the TX Matrix router.

On a routing matrix based on the TX Matrix Plus router, display logging information for all T1600 routers (line-card chassis [LCCs]) or a specific T1600 router (LCC) connected to the TX Matrix Plus router. When using the **lcc number** option, replace **number** with a value from 0 through 3.



**NOTE:** The **all-chassis** option displays system core files for the SCC or SFC and the LCCs connected to the SCC or SFC in the routing matrix while the **all-lcc** option only displays system core files for the LCCs in the routing matrix.

**all-members**—(EX4200 switches) (Optional) Display system core files on all members of the Virtual Chassis configuration.

**brief**—(Optional) View details of a binary file.

**component (UUID | serial number | all)**—(QFabric systems only) (Optional) Display a list of core-dump files located on individual QFabric system device or on the entire QFabric system.

**core-file-info**—(Optional) Display the stack trace of a core file.

**core-filename**—(Optional) Name of a specific core file to display.

**detail**—(Optional) View stack trace with details of the binary file.

**display-order (timestamp-sort | alphanumeric-sort)**—(QFabric systems only) (Optional) Display list of debug artifacts generated within the specified period—for example, within the last hour, within the last 20 minutes, or within the last 32 seconds—or according to their filename.

**display-period (hours | minutes | seconds)**—(QFabric systems only) (Optional) Display core-dump files generated within the specified period—for example, within the last hour, within the last 20 minutes, or within the last 32 seconds.

**kernel-crashinfo component (UUID | serial number)**—(QFabric systems only) (Optional) Display kernel crash information from the EEPROM on a QFabric system device.



**local**—(EX4200 switches only) (Optional) Display system core files on the local Virtual Chassis member.

**member *member-id***—(EX4200 switches only) (Optional) Display system core files on the specified member of the Virtual Chassis configuration. Replace *member-id* with a value from 0 through 9.

**repository (core | log)**—(QFabric systems only) (Optional) Specify either the core or log repository in which to view core-dump files.

**scc**—(TX Matrix routers only) (Optional) Display system core files on the TX Matrix router (or switch-card chassis).

**sfc**—(TX Matrix Plus routers only) (Optional) Display system core files on the TX Matrix Plus router (or switch-fabric chassis).

**Required Privilege Level**

view

**List of Sample Output**

[show system core-dumps on page 914](#)  
[show system core-dumps on page 914](#)  
[show system core-dumps \(TX Matrix Plus Router\) on page 914](#)  
[show system core-dumps \(QFX3500 Switch\) on page 915](#)  
[show system core-dumps \(QFabric Systems\) on page 916](#)  
[show system core-dumps core-file-info component serial number core-file-name \(QFabric Systems\) on page 916](#)  
[show system core-dumps component serial number display-order alphanumeric-sort repository core \(QFabric Systems\) on page 917](#)  
[show system core-dumps display-period \(QFabric Systems\) on page 917](#)  
[show system core-dumps kernel-crashinfo component serial number \(QFabric Systems\) on page 919](#)  
[show system core-dumps repository core \(QFabric Systems\) on page 921](#)  
[show system core-dumps repository log \(QFabric Systems\) on page 922](#)

**Output Fields**

[Table 70 on page 911](#) describes the output fields for the **show system core-dumps** command. Output fields are listed in the approximate order in which they appear.

**Table 70: show system core-dumps Output Fields**

Field Name	Field Description
<i>Permissions</i>	Read/write permissions for the file named.
<i>Links</i>	Number of links to the file.
<i>Owner</i>	Name of the file owner.
<i>Group</i>	Name of the group with file access.
<i>File size</i>	File size in bytes.
<i>Modified</i>	Last file modification date and time.



Table 70: show system core-dumps Output Fields (*continued*)

Field Name	Field Description
<i>Path/filename</i>	File path where the file resides and the filename.
<b>Repository scope:</b>	Repository where core-dump files and log files are stored. The core-dump files are located in the <b>core</b> repository, and the log files are located in the <b>log</b> repository. The default <b>Repository scope</b> is shared since both the <b>core</b> and <b>log</b> repositories are shared by all of the QFabric system devices.
<b>Repository head:</b>	Path to the top-level repository location.
<b>Repository name:</b>	Name of the repository: <b>core</b> or <b>log</b> .
<b>List of nodes for core repository:</b>	List of core-dump files associated with a particular QFabric system device located in the core repository.
<b>Node Group</b>	Name of the QFabric system device.
<b>Node Identifier</b>	UUID or serial number of the QFabric system device.
<b>Num</b>	Number of core-dump and log files.
<b>Model</b>	Model number of the QFabric system device.
<b>Usage</b>	Usage of the repository in megabytes.
<b>Total usage of core repository:</b>	Total usage of core-dump files associated with a particular QFabric system device located in the core repository. Usage is specified in megabytes and as a percentage.
<b>Total usage of log repository:</b>	Total usage of log files associated with a particular QFabric system device located in the log repository. Usage is specified in megabytes and as a percentage.
<b>List of nodes for core repository:</b>	List of core-dump files associated with a particular QFabric system device located in the core repository.
<b>List of nodes for log repository:</b>	List of log files associated with a particular QFabric system device located in the log repository.
<b>Filename</b>	Name of the core-dump file.
<b>Date</b>	Last core-dump file modification date and time.
<b>Size</b>	Size of the core-dump file.
<b>Core filename</b>	Filename of the core-dump file.
<b>Process name</b>	Name of the process that is generating a core-dump file or log file.



Table 70: show system core-dumps Output Fields (*continued*)

Field Name	Field Description
<b>Release</b>	Junos OS release.
<b>Build server</b>	Junos OS build server.
<b>Build date</b>	Junos OS build date.
<b>Stack trace</b>	Stack trace of the core-dump file.



## Sample Output

### show system core-dumps

This example shows the command output if core files exist.

```
user@switcht> show system core-dumps
-rw----- 1 root wheel 268369920 Jun 18 17:59 /var/crash/vmcore.0
-rw-rw---- 1 root field 3371008 Jun 18 17:53 /var/tmp/rpd.core.0
-rw-r--r-- 1 root wheel 27775914 Jun 18 17:59 /var/crash/kernel.0
```

### show system core-dumps

This example shows the command output if core files do not exist.

```
user@host> show system core-dumps
/var/crash/*core*: No such file or directory
/var/tmp/*core*: No such file or directory
/var/crash/kernel.*: No such file or directory
```

### show system core-dumps (TX Matrix Plus Router)

```
user@host> show system core-dumps
sfc0-re0:
-----
/var/crash/kernel.*: No such file or directory
/tftpboot/corefiles/*core*: No such file or directory

/var/crash/cores:
total 8

/var/tmp/cores:
total 1627592
-rw-r--r-- 1 root field 535346090 May 15 07:36
rpd.core-tarball.0.090515.0736.tgz
-rw-r--r-- 1 root field 105632057 May 15 07:37
rpd.core-tarball.1.090515.0737.tgz
-rw-r--r-- 1 root field 101981681 May 15 07:38
rpd.core-tarball.2.090515.0738.tgz
-rw-r--r-- 1 root field 85854573 May 15 07:40
rpd.core-tarball.3.090515.0740.tgz
-rw-r--r-- 1 root field 4157845 May 15 08:18
rpd.core-tarball.4.090515.0818.tgz

lcc0-re0:
-----
/var/crash/kernel.*: No such file or directory
/tftpboot/corefiles/*core*: No such file or directory

/var/crash/cores:
total 8

/var/tmp/cores:
total 12

lcc1-re0:
-----
/var/crash/kernel.*: No such file or directory
/tftpboot/corefiles/*core*: No such file or directory

/var/crash/cores:
total 8

/var/tmp/cores:
```



```

total 10024
-rw-r--r-- 1 root field 1875794 Apr 22 15:47
chassisd.core-tarball.0.090422.1547.tgz
-rw-r--r-- 1 root field 1894183 Apr 22 19:02
chassisd.core-tarball.0.090422.1902.tgz
-rw-r--r-- 1 root field 1290240 Apr 26 16:01 ksyncd_1558.core.0.090426.1601

lcc2-re0:
-----
/var/crash/kernel.*: No such file or directory
/tftpboot/corefiles/*core*: No such file or directory

/var/crash/cores:
total 21124008
-rw-r--r-- 1 root wheel 1022376528 May 2 06:43
core-LCC2-EGFPC7.core.0.090502.0643
-rw-r--r-- 1 root wheel 1022376528 May 2 08:13
core-LCC2-EGFPC7.core.0.090502.0813
-rw-r--r-- 1 root wheel 1022376544 May 5 06:15
core-LCC2-EGFPC7.core.0.090505.0615
-rw-r--r-- 1 root wheel 1022376544 May 6 10:59
core-LCC2-EGFPC7.core.0.090506.1059
-rw-r--r-- 1 root wheel 1022376528 May 2 06:58
core-LCC2-EGFPC7.core.1.090502.0658
-rw-r--r-- 1 root wheel 754271232 May 5 06:33
core-LCC2-EGFPC7.core.1.090505.0633
-rw-r--r-- 1 root wheel 264897536 May 6 11:12
core-LCC2-EGFPC7.core.1.090506.1112
-rw-r--r-- 1 root wheel 1022376528 May 2 07:22
core-LCC2-EGFPC7.core.2.090502.0722
-rw-r--r-- 1 root wheel 163633152 May 5 06:52
core-LCC2-EGFPC7.core.2.090505.0652
-rw-r--r-- 1 root wheel 171312128 May 6 12:13
core-LCC2-EGFPC7.core.2.090506.1213
-rw-r--r-- 1 root wheel 1022376528 May 2 07:39
core-LCC2-EGFPC7.core.3.090502.0739
-rw-r--r-- 1 root wheel 1022376528 May 2 07:55
core-LCC2-EGFPC7.core.4.090502.0755
-rw-r--r-- 1 root wheel 427277312 May 7 04:47
core-LCC2-STFPC4.core.0.090507.0447
-rw-r--r-- 1 root wheel 419609600 May 7 04:47
core-LCC2-STFPC5.core.0.090507.0447
-rw-r--r-- 1 root wheel 432356352 May 7 04:47
core-LCC2-STFPC6.core.0.090507.0447

/var/tmp/cores:
total 2568
-rw-r--r-- 1 root field 1290240 May 14 14:26 ksyncd_1540.core.0.090514.1426
...

```

show system  
core-dumps  
(QFX3500 Switch)

```

user@switch> show system core-dumps
/var/crash/*core*: No such file or directory
-rw-rw---- 1 root field 1545143 Jun 4 2012 /var/tmp/pafxpc.core.0.gz
-rw-rw---- 1 root field 1545146 Jun 4 2012 /var/tmp/pafxpc.core.1.gz
-rw-rw---- 1 root field 1545141 Jun 4 2012 /var/tmp/pafxpc.core.2.gz
-rw-rw---- 1 root field 1545146 Jun 4 2012 /var/tmp/pafxpc.core.3.gz
-rw-rw---- 1 root field 1545142 Jun 5 2012 /var/tmp/pafxpc.core.4.gz
/var/tmp/pics/*core*: No such file or directory
/var/crash/kernel.*: No such file or directory
/tftpboot/corefiles/*core*: No such file or directory
total 5

```



**show system  
core-dumps (QFabric  
Systems)**

user@switch> **show system core-dumps**

Repository scope: shared

Repository head: /pbdata/export

List of nodes for core repository: /pbdata/export/rdumps/

Node Group	Node Identifier	Num	Model	Usage
DG-0	BCF7208D-E44F-E011-802F-4171BAAC781D	0	qfx3100	OM
FM-0	73747cd8-0710-11e1-b6a4-00e081c5297e	0	fx-jvre	OM
DRE-0	77116f18-0710-11e1-a2a0-00e081c5297e	0	fx-jvre	OM
NW-NG-0	BBAK0394	0	qfx3500	OM
NW-NG-0	cd78871a-0710-11e1-878e-00e081c5297e	0	fx-jvre	OM
NW-NG-0	d0afda1e-0710-11e1-a1d0-00e081c5297e	0	fx-jvre	OM
FC-0	d31ab7a6-0710-11e1-ad1b-00e081c5297e	0	fx-jvre	OM
FC-1	d4d0f254-0710-11e1-90c3-00e081c5297e	0	fx-jvre	OM
IC-WS001	WS001	0	-	-
IC-WS001	WS001/YW3803	0	qfxc08-3008	OM
IC-WS001	WS001/YN5999	0	qfxc08-3008	OM
node-device1	BBAK0372	0	qfx3500	OM
node-device1	EE3093	0	qfx3500	OM

Total usage of core repository: 0M of 70000M (0.0%)

List of nodes for log repository: /pbdata/export/rlogs/

Node Group	Node Identifier	Num	Model	Usage
DG-0	BCF7208D-E44F-E011-802F-4171BAAC781D	0	qfx3100	OM
FM-0	73747cd8-0710-11e1-b6a4-00e081c5297e	1	fx-jvre	OM
DRE-0	77116f18-0710-11e1-a2a0-00e081c5297e	1	fx-jvre	OM
NW-NG-0	BBAK0394	1	qfx3500	OM
NW-NG-0	cd78871a-0710-11e1-878e-00e081c5297e	1	fx-jvre	OM
NW-NG-0	d0afda1e-0710-11e1-a1d0-00e081c5297e	3	fx-jvre	OM
FC-0	d31ab7a6-0710-11e1-ad1b-00e081c5297e	1	fx-jvre	OM
FC-1	d4d0f254-0710-11e1-90c3-00e081c5297e	1	fx-jvre	OM
IC-WS001	WS001	0	-	-
IC-WS001	WS001/YN5999	1	qfxc08-3008	OM
IC-WS001	WS001/YW3803	1	qfxc08-3008	OM
node-device1	BBAK0372	1	qfx3500	OM
node-device1	EE3093	1	qfx3500	OM

Total usage of log repository: 0M of 70000M (0.0%)

**show system  
core-dumps  
core-file-info  
component serial**

user@switch> **show system core-dumps core-file-info component**

**e8ff4b3e-7d92-11e0-be5d-00e081c1fe0e cosd.core.0.1519.05162011131846.gz**

Repository scope: shared

Repository head: /pbstorage

Repository name: core



**number core-file-name**  
(QFabric Systems)

Core filename: /pbstorage/rdumps/e8ff4b3e-7d92-11e0-be5d-00e081c1fe0e/5658.cosd.core.0.1519.05162011131846  
 Process name: cosd  
 Release: 11.3I0  
 Build server: /c/ssengupta/dfx\_ha\_v1/obj-i386-dcp/dcp/usr.sbin/cosd  
 Build date: 2011-05-14 01:11:44 UTC  
 Stack trace:  
 #0 0x8885d183 in select () from /usr/lib/libc.so.6  
 #0 0x8885d183 in select () from /usr/lib/libc.so.6  
 #1 0x887d4a45 in pselect () from /usr/lib/libc.so.6  
 #2 0x88774719 in pselect () from /usr/lib/libthr.so.2  
 #3 0x885de5db in \_\_evGetNext () from /usr/lib/libisc.so.2  
 #4 0x885debf0 in \_\_evMainLoop () from /usr/lib/libisc.so.2  
 #5 0x081125b2 in cosd\_loop ()  
 #6 0x0812e19a in main ()

**show system**  
**core-dumps**  
**component serial**  
**number display-order**  
**alphanumeric-sort**  
**repository core**  
(QFabric Systems)

user@switch> **show system core-dumps component BBAK8891 display-order alphanumeric-sort repository core**  
 Repository scope: shared  
 Repository head: /pbdata/export  
 Repository name: core  
 List of core dumps for component BBAK8891  
 Repository location: /pbdata/export/rdumps/BBAK8891

Filename	Date	Size
eswd.core.0.1361.11172011214257.gz	Nov 17 21:43:10 2011	4779553
eswd.core.1.80267.11172011214514.gz	Nov 17 21:45:19 2011	3541648
eswd.core.2.80682.11172011214535.gz	Nov 17 21:45:43 2011	2156683
vccpd.core.0.1195.11182011151131.gz	Nov 18 15:11:35 2011	375617

Number of core dumps in repository:4

**show system**  
**core-dumps**

user@switch> **show system core-dumps display-period 24h**  
 show system core-dumps display-period 24h  
 Repository scope: shared



**display-period**  
(QFabric Systems)

```

Repository head: /pbdata/export
List of core dumps at repository: /pbdata/export/rdumps
Delta timespec: Last 24h
Component: BBAK8273
Filename                               Size                               Date

vccpd.core.0.1195.11182011151131.gz    Nov 18 15:11:35 2011    375794
Component: cedb7b0e-0025-11e1-9a5f-00e081c52990
Filename                               Size                               Date

vccpd.core.0.1461.11182011151131.gz    Nov 18 15:11:31 2011    120951
Component: ee19c4f8-0025-11e1-aef6-00e081c52990
Filename                               Size                               Date

vccpd.core.0.1462.11182011151131.gz    Nov 18 15:11:31 2011    109420
Component: BBAK8281
Filename                               Size                               Date

vccpd.core.0.1196.11182011151131.gz    Nov 18 15:11:36 2011    375373
Component: BBAK8891
Filename                               Size                               Date

vccpd.core.0.1195.11182011151131.gz    Nov 18 15:11:35 2011    375617
Component: BBAK8276
Filename                               Size                               Date

vccpd.core.0.1196.11182011151131.gz    Nov 18 15:11:35 2011    375350
Component: BBAK8868
Filename                               Size                               Date

vccpd.core.0.1196.11182011151130.gz    Nov 18 15:11:34 2011    376211
Component: BBAK8835
Filename                               Size                               Date

vccpd.core.0.1195.11182011151130.gz    Nov 18 15:11:35 2011    375700
Component: BBAK8283
Filename                               Size                               Date

vccpd.core.0.1195.11182011151131.gz    Nov 18 15:11:36 2011    368298
Component: YW3781/YW3781
Filename                               Size                               Date

vccpd.core.0.1220.11182011151131.gz    Nov 18 15:11:38 2011    380002
Component: 09726be2-0026-11e1-82d9-00e081c52990
Filename                               Size                               Date

vccpd.core.0.1461.11182011151130.gz    Nov 18 15:11:31 2011    119965
Component: BBAK8309
Filename                               Size                               Date

vccpd.core.0.1196.11182011151131.gz    Nov 18 15:11:36 2011    378930
Component: 303d476a-0026-11e1-abf4-00e081c52990
Filename                               Size                               Date

vccpd.core.0.1460.11182011151131.gz    Nov 18 15:11:31 2011    118385
Component: YW3798/YW3798
Filename                               Size                               Date

vccpd.core.0.1219.11182011151131.gz    Nov 18 15:11:36 2011    380455
List of log dumps at repository: /pbdata/export/rlogs
Delta timespec: Last 24h

```



```

Component: BBAK8273
Filename                               Size                               Date
vccpd.tarball.0.1195.11182011151138.tgz  Nov 18 15:11:39 2011      20415
Component: cedb7b0e-0025-11e1-9a5f-00e081c52990
Filename                               Size                               Date
vccpd.tarball.0.1461.11182011151131.tgz  Nov 18 15:11:33 2011      19651
Component: ee19c4f8-0025-11e1-aef6-00e081c52990
Filename                               Size                               Date
vccpd.tarball.0.1462.11182011151133.tgz  Nov 18 15:11:36 2011      24650
Component: BBAK8281
Filename                               Size                               Date
vccpd.tarball.0.1196.11182011151137.tgz  Nov 18 15:11:41 2011      19445
Component: BBAK8891
Filename                               Size                               Date
vccpd.tarball.0.1195.11182011151138.tgz  Nov 18 15:11:41 2011      21916
Component: BBAK8276
Filename                               Size                               Date
vccpd.tarball.0.1196.11182011151137.tgz  Nov 18 15:11:39 2011      20461
Component: BBAK8868
Filename                               Size                               Date
vccpd.tarball.0.1196.11182011151137.tgz  Nov 18 15:11:41 2011      21924
Component: BBAK8835
Filename                               Size                               Date
vccpd.tarball.0.1195.11182011151137.tgz  Nov 18 15:11:39 2011      19424
Component: BBAK8283
Filename                               Size                               Date
vccpd.tarball.0.1195.11182011151138.tgz  Nov 18 15:11:42 2011      31186
Component: YW3781/YW3781
Filename                               Size                               Date
vccpd.tarball.0.1220.11182011151141.tgz  Nov 18 15:11:45 2011      27565
Component: 09726be2-0026-11e1-82d9-00e081c52990
Filename                               Size                               Date
vccpd.tarball.0.1461.11182011151130.tgz  Nov 18 15:11:34 2011      19613
Component: BBAK8309
Filename                               Size                               Date
vccpd.tarball.0.1196.11182011151138.tgz  Nov 18 15:11:46 2011      50362
Component: 303d476a-0026-11e1-abf4-00e081c52990
Filename                               Size                               Date
vccpd.tarball.0.1460.11182011151133.tgz  Nov 18 15:11:33 2011      19360
Component: YW3798/YW3798
Filename                               Size                               Date
vccpd.tarball.0.1219.11182011151140.tgz  Nov 18 15:11:49 2011      24473

```

show system  
core-dumps  
kernel-crashinfo

```

user@switch> show system core-dumps kernel-crashinfo component A0001/YA0197
Node: A0001/YA0197

```

Information about previous kernel crash:



## component serial number (QFabric Systems)

-- Kernel panic data --

Panic string: kdb\_sysctl\_panic  
System uptime: 3 day 20 hr 59 min 40 sec Kernel crash time: 2011-11-15 Wed 15:25:17  
Kernel build linkstamp: JUNOS 11.3I #0: 2011-11-10 20:42:27 UTC

-- Stacktrace of panicing context --

Processor 1 (crash monarch):

savectx+0x0 (c9552800,80214efc,802a7fbc,c88ad05c) ra 801b93a8 sz 0  
kdm\_kcore\_save\_crashinfo+0x254 (c9552800,0,802a7fbc,c88ad05c) ra 801b9f44 sz 784  
kdm\_kcore\_kern\_panic\_event\_handler+0x4b0 (c9552800,0,802a7fbc,c88ad05c) ra 8022a9b8 sz 88  
panic+0x1d0 (c9552800,0,4,77fed534) ra 802540c0 sz 56  
kdb\_sysctl\_panic+0x70 (c9552800,0,4,77fed534) ra 80237e58 sz 40 sysctl\_root+0x12c (c9552800,0,4,e8bc5cf8) ra 80238e50 sz 48  
userland\_sysctl+0x164 (c9552800,0,4,e8bc5cf8) ra 8023956c sz 104  
\_\_sysctl+0xe4 (c9552800,0,4,e8bc5cf8) ra 806d62e8 sz 160  
trap+0xe1c (c9552800,0,4,e8bc5cf8) ra 80896e68 sz 128  
MipsUserGenException+0x1a4 (c9552800,0,4,405cd12c) ra 0 sz 0  
pid 82340, process: sysctl

Processor 0:

restoreintr+0x14 (1,81bca820,3,0) ra 806cdc3c sz 0  
spinlock\_exit+0x30 (1,81bca820,3,0) ra 8025d354 sz 24  
sleepq\_release+0x64 (1,81bca820,3,0) ra 8025e670 sz 24  
sleepq\_timeout+0x224 (1,81bca820,3,0) ra 80240294 sz 48  
softclock+0x434 (1,81bca820,3,0) ra 802067f8 sz 80  
ithread\_loop+0x244 (1,81bca820,3,0) ra 80200e28 sz 64 fork\_exit+0xc0 (1,81bca820,3,0) ra 80897c28 sz 48  
MipsNMIException+0x34 (1,81bca820,3,0) ra 0 sz 0  
pid 82340, process: sysctl

Processor 2:

cpu\_idle+0x20 (80960000,51bbc,2031df,81bca1b8) ra 80204948 sz 24 idle\_proc+0x130 (80960000,51bbc,2031df,81bca1b8) ra 80200e28 sz 56 fork\_exit+0xc0 (80960000,51bbc,2031df,81bca1b8) ra 80897c28 sz 48  
MipsNMIException+0x34 (80960000,51bbc,2031df,81bca1b8) ra 0 sz 0  
pid 82340, process: sysctl

Processor 3:

cpu\_idle+0x20 (80960000,51bbc,2038df,81bca300) ra 80204948 sz 24 idle\_proc+0x130 (80960000,51bbc,2038df,81bca300) ra 80200e28 sz 56 fork\_exit+0xc0 (80960000,51bbc,2038df,81bca300) ra 80897c28 sz 48  
MipsNMIException+0x34 (80960000,51bbc,2038df,81bca300) ra 0 sz 0  
pid 82340, process: sysctl

Processor 4:

cpu\_idle+0x20 (80960000,51bbc,2037df,81bca448) ra 80204948 sz 24 idle\_proc+0x130 (80960000,51bbc,2037df,81bca448) ra 80200e28 sz 56 fork\_exit+0xc0 (80960000,51bbc,2037df,81bca448) ra 80897c28 sz 48  
MipsNMIException+0x34 (80960000,51bbc,2037df,81bca448) ra 0 sz 0  
pid 82340, process: sysctl

Processor 5:

restoreintr+0x14 (1,51bbc,203edf,81bca590) ra 806cdc3c sz 0  
spinlock\_exit+0x30 (1,51bbc,203edf,81bca590) ra 80204a34 sz 24 idle\_proc+0x21c (1,51bbc,203edf,81bca590) ra 80200e28 sz 56 fork\_exit+0xc0 (1,51bbc,203edf,81bca590) ra 80897c28 sz 48  
MipsNMIException+0x34 (1,51bbc,203edf,81bca590) ra 0 sz 0  
pid 82340, process: sysctl



```

Processor 6:
cpu_idle+0x20 (80960000,51bbc,205cdf,81bca6d8) ra 80204948 sz 24 idle_proc+0x130
(80960000,51bbc,205cdf,81bca6d8) ra 80200e28 sz 56 fork_exit+0xc0
(80960000,51bbc,205cdf,81bca6d8) ra 80897c28 sz 48
MipsNMIException+0x34 (80960000,51bbc,205cdf,81bca6d8) ra 0 sz 0
pid 82340, process: sysctl

```

```

Processor 7:
lockmgr+0x5ac (c97e8484,c8dd9800,0,c8dd9800) ra 8c11c81c sz 48
sal_sem_take+0x134 (c97e8484,c8dd9800,0,c8dd9800) ra 8c351108 sz 56
_bcm_esw_linkscan_thread+0x45c (c97e8484,c8dd9800,0,c8dd9800) ra 8c11cdb4 sz 104
sal_thread_start_wrap+0x74 (c97e8484,c8dd9800,0,c8dd9800) ra 80200e28 sz 32
fork_exit+0xc0 (c97e8484,c8dd9800,0,c8dd9800) ra 80897c28 sz 48
MipsNMIException+0x34 (c97e8484,c8dd9800,0,c8dd9800) ra 0 sz 0
pid 82340, process: sysctl
-- End of stacktrace --

```

```

show system
core-dumps repository

```

```

user@switch> show system core-dumps repository core
Repository scope: shared
Repository head: /pbdata/export

```



**core (QFabric Systems)**

Repository name: core

List of nodes for core repository: /pbdata/export/rdumps/

Node Group	Node Identifier	Num	Model	Usage
DG-0	BCF7208D-E44F-E011-802F-4171BAAC781D	0	qfx3100	OM
FM-0	73747cd8-0710-11e1-b6a4-00e081c5297e	0	fx-jvre	OM
DRE-0	77116f18-0710-11e1-a2a0-00e081c5297e	0	fx-jvre	OM
NW-NG-0	BBAK0394	0	qfx3500	OM
NW-NG-0	cd78871a-0710-11e1-878e-00e081c5297e	0	fx-jvre	OM
NW-NG-0	d0afda1e-0710-11e1-a1d0-00e081c5297e	0	fx-jvre	OM
FC-0	d31ab7a6-0710-11e1-ad1b-00e081c5297e	0	fx-jvre	OM
FC-1	d4d0f254-0710-11e1-90c3-00e081c5297e	0	fx-jvre	OM
IC-WS001	WS001	0	-	-
IC-WS001	WS001/YW3803	0	qfxc08-3008	OM
IC-WS001	WS001/YN5999	0	qfxc08-3008	OM
node-device1	BBAK0372	0	qfx3500	OM
node-device1	EE3093	0	qfx3500	OM
Total usage of core repository: 0M of 70000M (0.0%)				

**show system  
core-dumps repository  
log (QFabric Systems)**

user@switch&gt; show system core-dumps repository log

Repository scope: shared

Repository head: /pbdata/export

Repository name: log

List of nodes for log repository: /pbdata/export/rlogs/

Node Group	Node Identifier	Num	Model	Usage
DG-0	BCF7208D-E44F-E011-802F-4171BAAC781D	0	qfx3100	OM
FM-0	73747cd8-0710-11e1-b6a4-00e081c5297e	1	fx-jvre	OM
DRE-0	77116f18-0710-11e1-a2a0-00e081c5297e	1	fx-jvre	OM
NW-NG-0	BBAK0394	1	qfx3500	OM
NW-NG-0	cd78871a-0710-11e1-878e-00e081c5297e	1	fx-jvre	OM
NW-NG-0	d0afda1e-0710-11e1-a1d0-00e081c5297e	3	fx-jvre	OM
FC-0	d31ab7a6-0710-11e1-ad1b-00e081c5297e	1	fx-jvre	OM
FC-1	d4d0f254-0710-11e1-90c3-00e081c5297e	1	fx-jvre	OM
IC-WS001	WS001	0	-	-
IC-WS001	WS001/YN5999	1	qfxc08-3008	OM
IC-WS001	WS001/YW3803	1	qfxc08-3008	OM
node-device1	BBAK0372	1	qfx3500	OM
node-device1	EE3093	1	qfx3500	OM
Total usage of log repository: 0M of 70000M (0.0%)				



## show system directory-usage

<b>Syntax</b>	show system directory-usage <depth <i>number</i> > <path>
<b>Syntax (EX Series)</b>	show system directory-usage <all-members> <depth <i>number</i> > <local> <member <i>member-id</i> > <path>
<b>Syntax (TX Matrix Router)</b>	show system directory-usage <all-chassis   all-lcc   lcc <i>number</i>   scc> <depth <i>number</i> > <path>
<b>Syntax (TX Matrix Plus Router)</b>	show system directory-usage <all-chassis   all-lcc   lcc <i>number</i>   sfc <i>number</i> > <depth <i>number</i> > <path>
<b>Syntax (MX Series Router)</b>	show system directory-usage <all-members> <depth <i>number</i> > <local> <member <i>member-id</i> > <path>
<b>Syntax (QFX Series)</b>	show system directory-usage <depth <i>number</i> > <path> <infrastructure <i>name</i> > <interconnect-device <i>name</i> > <node-group <i>name</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display directory usage information.
<b>Options</b>	<p><b>none</b>—Display all directory usage information.</p> <p><b>all-chassis</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) Display directory usage information about all the T640 routers (in a routing matrix based on a TX Matrix router) or T1600 routers (in a routing matrix based on a TX Matrix Plus router) in the chassis.</p>



**all-lcc**—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display directory information for all T640 routers (or line-card chassis) connected to the TX Matrix router. On a TX Matrix Plus router, display directory information for all T1600 routers (or line-card chassis) connected to the TX Matrix Plus router.

**all-members**—(EX4200 switches and MX Series routers only) (Optional) Display directory information for all members of the Virtual Chassis configuration.

**depth *number***—(Optional) Depth of the directory to traverse. This option is useful when you want to limit the output shown for a large file system.

**infrastructure *name***— (QFabric systems only) (Optional) Display directory information for the fabric control Routing Engines and fabric manager Routing Engines.

**interconnect-device *name***— (QFabric systems only) (Optional) Display directory information for the Interconnect device.

**node-group *name***— (QFabric systems only) (Optional) Display directory information for the Node group.

**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display directory information for a specific T640 router that is connected to the TX Matrix router. On a TX Matrix Plus router, display directory information for a specific T1600 router that is connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.

**local**—(EX4200 switches and MX Series routers only) (Optional) Display directory information for the local Virtual Chassis member.

**member *member-id***—(EX4200 switches and MX Series routers only) (Optional) Display directory information for the specified member of the Virtual Chassis configuration. For EX4200 switches, replace ***member-id*** with a value from 0 through 9. For an MX Series Virtual Chassis, replace ***member-id*** with a value of 0 or 1.

***path***—(Optional) Path or root directory to traverse.

**scc**—(TX Matrix router only) (Optional) Display directory information for the TX Matrix router (or switch-card chassis).

**sfc *number***—(TX Matrix Plus router only) (Optional) Display directory information for the TX Matrix Plus router (or switch-fabric chassis). Replace ***number*** with 0.

Required Privilege  
Level

view

List of Sample Output

[show system directory-usage scc \(TX Matrix Router\) on page 926](#)  
[show system directory-usage sfc \(TX Matrix Plus Router\) on page 926](#)  
[show system directory-usage \(QFX3500 Switch\) on page 926](#)

Output Fields

[Table 71 on page 925](#) describes the output fields for the **show system directory-usage** command. Output fields are listed in the approximate order in which they appear.



Table 71: show system directory-usage Output Fields

Field Name	Field Description
<i>bytes</i>	Number of bytes used by files in a directory.
<i>directory-name</i>	Name of the directory.



## Sample Output

**show system  
directory-usage scc  
(TX Matrix Router)**

```
user@host> show system directory-usage /var/tmp scc
/var/tmp
1.0K    /var/tmp/vi.recover
2.0K    /var/tmp/instmp.tPMk8u
1.0K    /var/tmp/install
        /var/tmp/instmp.GUMpur
4.8M    /var/tmp/instmp.GUMpur/packages
6.4M    /var/tmp/troy1
297M    /var/tmp/dsw
        /var/tmp/pkg_tmp.2073
83K     /var/tmp/pkg_tmp.2073/bin
        /var/tmp/instmp.oMIDb1
89K     /var/tmp/instmp.oMIDb1/bin
        /var/tmp/instmp.byhMjR
4.6M    /var/tmp/instmp.byhMjR/packages
        /var/tmp/instmp.6fqHf3
1.7M    /var/tmp/instmp.6fqHf3/packages
        /var/tmp/instmp.mljECe
4.6M    /var/tmp/instmp.mljECe/packages
```

**show system  
directory-usage sfc  
(TX Matrix Plus  
Router)**

```
user@switch> show system directory-usage /var/tmp sfc 0
sfc0-re0:
-----
        /var/tmp
46K     /var/tmp/gres-tp
        /var/tmp/sec-download
2.0K    /var/tmp/sec-download/sub-download
2.0K    /var/tmp/vi.recover
2.0K    /var/tmp/install
795M    /var/tmp/cores
766K    /var/tmp/pr440594
```

**show system  
directory-usage  
(QFX3500 Switch)**

```
user@switch> show system directory-usage
/var/tmp
30K     /var/tmp/gres-tp
2.0K    /var/tmp/rtsdb
2.0K    /var/tmp/vi.recover
2.0K    /var/tmp/install
2.0K    /var/tmp/pics
```



## show system license

<b>Syntax</b>	show system license <installed   keys   usage>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display licenses and information about how they are used.
<b>Options</b>	<p><b>none</b>—Display all license information.</p> <p><b>installed</b>—(Optional) Display installed licenses only.</p> <p><b>keys</b>—(Optional) Display a list of license keys. Use this information to verify that each expected license key is present.</p> <p><b>usage</b>—(Optional) Display the state of licensed features.</p>
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">show system license on page 929</a> <a href="#">show system license installed on page 929</a> <a href="#">show system license keys on page 929</a> <a href="#">show system license usage on page 929</a> <a href="#">show system license (QFX Series) on page 930</a>
<b>Output Fields</b>	Table 72 on page 927 lists the output fields for the <b>show system license</b> command. Output fields are listed in the approximate order in which they appear.

**Table 72: show system license Output Fields**

Field Name	Field Description
<b>Feature name</b>	Name assigned to the configured feature. You use this information to verify that all the features for which you installed licenses are present.
<b>Licenses used</b>	<p>Number of licenses used by a router or switch. You use this information to verify that the number of licenses used matches the number configured. If a licensed feature is configured, the feature is considered used.</p> <p><b>NOTE:</b> In Junos OS Release 10.1 and later, the <b>Licenses used</b> column displays the actual usage count based on the number of active sessions or connections as reported by the corresponding feature daemons. This is applicable for scalable license-based features such as Subscriber Access (<b>scale-subscriber</b>), L2TP (<b>scale-l2tp</b>), Mobile IP (<b>scale-mobile-ip</b>), and so on.</p>



Table 72: show system license Output Fields (*continued*)

Field Name	Field Description
Licenses installed	<p>Information about the installed license key:</p> <ul style="list-style-type: none"><li>• <b>License identifier</b>—Identifier associated with a license key.</li><li>• <b>State</b>—State of the license key:<b>valid</b> or <b>invalid</b>. An <b>invalid</b> state indicates that the key was entered incorrectly or is not valid for the specific device.</li><li>• <b>License version</b>—Version of a license. The version indicates how the license is validated, the type of signature, and the signer of the license key.</li><li>• <b>Valid for device</b>—Device that can use a license key.</li><li>• <b>Group defined</b>—Group membership of a device.</li><li>• <b>Features</b>—Feature associated with a license, such as data link switching (DLSw).</li></ul>
Licenses needed	Number of licenses required for features being used but not yet properly licensed.
Expiry	Amount of time left within the grace period before a license is required for a feature being used.



## Sample Output

**show system license**

user@host> show system license

License usage:

Feature name	Licenses used	Licenses installed	Licenses needed	Expiry
subscriber-accounting	2	2	0	permanent
subscriber-authentication	1	2	0	permanent
subscriber-address-assignment	2	2	0	permanent
subscriber-vlan	2	2	0	permanent
subscriber-ip	0	2	0	permanent
scale-subscriber	2	3	0	permanent
scale-l2tp	4	5	0	permanent
scale-mobile-ip	1	2	0	permanent

Licenses installed:

License identifier: XXXXXXXXXX

License version: 2

Features:

subscriber-accounting - Per Subscriber Radius Accounting  
permanent  
subscriber-authentication - Per Subscriber Radius Authentication  
permanent  
subscriber-address-assignment - Radius/SRC Address Pool Assignment  
permanent  
subscriber-vlan - Dynamic Auto-sensed Vlan  
permanent  
subscriber-ip - Dynamic and Static IP  
permanent

**show system license  
installed**

user@host> show system license installed

License identifier: XXXXXXXXXX

License version: 2

Features:

subscriber-accounting - Per Subscriber Radius Accounting  
permanent  
subscriber-authentication - Per Subscriber Radius Authentication  
permanent  
subscriber-address-assignment - Radius/SRC Address Pool Assignment  
permanent  
subscriber-vlan - Dynamic Auto-sensed Vlan  
permanent  
subscriber-ip - Dynamic and Static IP  
permanent

**show system license  
keys**

user@host> show system license keys

```
XXXXXXXXXX xxxxxx xxxxxx xxxxxx xxxxxx xxxxxx xxxxxx
          xxxxxx xxxxxx xxxxxx xxxxxx xxxxxx xxxxxx
          xxxxxx xxxxxx xxx
```

**show system license  
usage**

user@host> show system license usage

License usage:

Feature name	Licenses used	Licenses installed	Licenses needed	Expiry
subscriber-accounting	2	2	0	permanent
subscriber-authentication	1	2	0	permanent



subscriber-address-assignment	2	2	0	permanent
subscriber-vlan	2	2	0	permanent
subscriber-ip	0	2	0	permanent
scale-subscriber	2	3	0	permanent
scale-l2tp	4	5	0	permanent
scale-mobile-ip	1	2	0	permanent

#### show system license (QFX Series)

user@switch> show system license

License usage:

Feature name	Licenses used	Licenses installed	Licenses needed	Expiry
qfx-edge-fab	1	1	1	permanent

Licenses installed:

License identifier: JUNOS417988

License version: 1

Features:

qfx-edge-fab	-	QFX3000 Series QF/Node feature license
permanent		



## show system processes

<b>Syntax</b>	<pre>show system processes &lt;brief   detail   extensive   summary&gt; &lt;health (pid <i>process-identifier</i>   process-name <i>process-name</i>)&gt; &lt;providers&gt; &lt;resource-limits (brief   detail) <i>process-name</i>&gt; &lt;wide&gt;</pre>
<b>Syntax (EX Series Switches)</b>	<pre>show system processes &lt;all-members&gt; &lt;brief   detail   extensive   summary&gt; &lt;health (pid <i>process-identifier</i>   process-name <i>process-name</i>)&gt; &lt;local&gt; &lt;member <i>member-id</i>&gt; &lt;providers&gt; &lt;resource-limits (brief   detail) <i>process-name</i>&gt; &lt;wide&gt;</pre>
<b>Syntax (MX Series Routers)</b>	<pre>show system processes &lt;all-members&gt; &lt;brief   detail   extensive   summary&gt; &lt;health (pid <i>process-identifier</i>   process-name <i>process-name</i>)&gt; &lt;local&gt; &lt;member <i>member-id</i>&gt; &lt;providers&gt; &lt;resource-limits (brief   detail) <i>process-name</i>&gt; &lt;wide&gt;</pre>
<b>Syntax (QFX Series)</b>	<pre>show system processes &lt;brief   detail   extensive   summary &gt; &lt;health (pid <i>process-identifier</i>   process-name <i>process-name</i>)&gt; &lt;interconnect-device <i>name</i>&gt; &lt;node-group <i>name</i>&gt; &lt;providers&gt; &lt;resource-limits&gt; &lt;wide&gt;</pre>
<b>Syntax (TX Matrix Routers)</b>	<pre>show system processes &lt;brief   detail   extensive   summary&gt; &lt;all-chassis  all-lcc   lcc <i>number</i>   scc&gt; &lt;wide&gt;</pre>
<b>Syntax (TX Matrix Plus Routers)</b>	<pre>show system processes &lt;brief   detail   extensive   summary&gt; &lt;all-chassis  all-lcc   lcc <i>number</i>   sfc <i>number</i>&gt; &lt;wide&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Option <b>sfc</b> introduced for the TX Matrix Plus router in Junos OS Release 9.6.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p>



- Description** Display information about software processes that are running on the router or switch and that have controlling terminals.
- Options** **none**—Display standard information about system processes.
- brief | detail | extensive | summary**—(Optional) Display the specified level of detail.
- adaptive-services**—(Optional) Display the configuration management process that manages the configuration for stateful firewall, Network Address Translation (NAT), intrusion detection services (IDS), and IP Security (IPsec) services on the Adaptive Services PIC.
- alarm-control**—(Optional) Display the process to configure the system alarm.
- all-chassis**—(TX Matrix and TX Matrix Plus routers only) (Optional) Display standard system process information about all the T640 routers (in a routing matrix based on the TX Matrix router) or all the T1600 routers (in a routing matrix based on the TX Matrix Plus router) in the chassis.
- all-lcc**—(TX Matrix and TX Matrix Plus routers only) (Optional) Display standard system process information for all T640 routers (or line-card chassis) connected to the TX Matrix router. Display standard system process information for all T1600 routers (or line-card chassis) connected to the TX Matrix Plus router.
- all-members**—(EX4200 switches and MX Series routers only) (Optional) Display standard system process information for all members of the Virtual Chassis configuration.
- ancpd-service**—Display the Access Node Control Protocol (ANCP) process, which works with a special Internet Group Management Protocol (IGMP) session to collect outgoing interface mapping events in a scalable manner.
- application-identification**—Display the process that identifies an application using intrusion detection and prevention (IDP) to allow or deny traffic based on applications running on standard or nonstandard ports.
- audit-process**—(Optional) Display the RADIUS accounting process.
- auto-configuration**—Display the Interface Auto-Configuration process.
- bootp**—Display the process that enables a router, switch, or interface to act as a Dynamic Host Configuration Protocol (DHCP) or bootstrap protocol (BOOTP) relay agent. DHCP relaying is disabled.
- captive-portal-content-delivery**—Display the HTTP redirect service by specifying the location to which a subscriber's initial Web browser session is redirected, enabling initial provisioning and service selection for the subscriber.
- ce-l2tp-service**—(Optional) (M10, M10i, M7i, and MX Series routers only) Display the Universal Edge Layer 2 Tunneling Protocol (L2TP) process, which establishes L2TP tunnels and Point-to-Point Protocol (PPP) sessions through L2TP tunnels.



**cfm**—Display Ethernet Operations, Administration, and Maintenance (OAM) connectivity fault management (CFM) process, which can be used to monitor the physical link between two switches.

**chassis-control**—(Optional) Display the chassis management process.

**class-of-service**—(Optional) Display the class-of-service (CoS) process, which controls the router's or switch's CoS configuration.

**clksyncd-service**—Display the external clock synchronization process, which uses synchronous Ethernet (SyncE).

**craft-control**—Display the process for the I/O of the craft interface.

**database-replication**—(EX Series switches and MX Series routers only) (Optional) Display the database replication process.

**datapath-trace-service**—Display the packet path tracing process.

**dhcp-service**—(EX Series switches and MX Series routers only) (Optional) Display the Dynamic Host Configuration Protocol process, which enables a DHCP server to allocate network IP addresses and deliver configuration settings to client hosts without user intervention.

**diameter-service**—(Optional) Display the diameter process.

**disk-monitoring**—(Optional) Display the disk monitoring process, which checks the health of the hard disk drive on the Routing Engine.

**dynamic-flow-capture**—(Optional) Display the dynamic flow capture (DFC) process, which controls DFC configurations on Monitoring Services III PICs.

**ecc-error-logging**—(Optional) Display the error checking and correction (ECC) process, which logs ECC parity errors in memory on the Routing Engine.

**ethernet-connectivity-fault-management**— Display the process that provides IEEE 802.1ag OAM connectivity fault management (CFM) database information for CFM maintenance association end points (MEPs) in a CFM session.

**ethernet-link-fault-management**—(EX Series switches and MX Series routers only) (Optional) Display the process that provides the OAM link fault management (LFM) information for Ethernet interfaces.

**event-processing**—(Optional) Display the event process (eventd).

**firewall**—(Optional) Display the firewall management process, which manages the firewall configuration and enables accepting or rejecting packets that are transiting an interface on a router or switch.

**general-authentication-service**—(EX Series switches and MX Series routers only) (Optional) Display the general authentication process.



**health** (*pid* ***process-identifier*** | ***process-name*** ***process-name***)—(Optional) Display process health information, either by process id (PID) or by process name.

**iccp-service**—Display the Inter-Chassis Communication Protocol (ICCP) process.

**idp-policy**—Display the intrusion detection and prevention (IDP) protocol process.

**ilmi**—Display the Integrated Local Management Interface (ILMI) protocol process, which provides bidirectional exchange of management information between two ATM interfaces across a physical connection.

**inet-process**—Display the IP multicast family process.

**init**—Display the process that initializes the USB modem.

**interface-control**—(Optional) Display the interface process, which controls the router's or switch's physical interface devices and logical interfaces.

**kernel-replication**—(Optional) Display the kernel replication process, which replicates the state of the backup Routing Engine when graceful Routing Engine switchover (GRES) is configured.

**l2-learning**—(Optional) Display the Layer 2 address flooding and learning process.

**l2cpd-service**—Display the Layer 2 Control Protocol process, which enables features such as Layer 2 protocol tunneling and nonstop bridging.

**lACP**—(Optional) Display the Link Aggregation Control Protocol (LACP) process. LACP provides a standardized means for exchanging information between partner systems on a link to allow their link aggregation control instances to reach agreement on the identity of the LAG to which the link belongs, and then to move the link to that LAG, and to enable the transmission and reception processes for the link to function in an orderly manner.

**lcc number**—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display standard system process information for a specific T640 router that is connected to the TX Matrix router. On a TX Matrix Plus router, display standard system process information for a specific T1600 router that is connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.

**local**—(EX4200 switches and MX Series routers only) (Optional) Display standard system process information for the local Virtual Chassis member.

**local-policy-decision-function**—Display the process for the Local Policy Decision Function, which regulates collection of statistics related to applications and application groups and tracking of information about dynamic subscribers and static interfaces.

**logical-system-mux**—Display the logical router multiplexer process (lrmuxd), which manages the multiple instances of the routing protocols process (rpd) on a machine running logical routers.



**mac-validation**—Display the MAC validation process, which configures MAC address validation for subscriber interfaces created on demux interfaces in dynamic profiles on MX Series routers.

**member *member-id***—(EX4200 switches and MX Series routers only) (Optional) Display standard system process information for the specified member of the Virtual Chassis configuration. For EX4200 switches, replace ***member-id*** with a value from 0 through 9. For an MX Series Virtual Chassis, replace ***member-id*** with a value of 0 or 1.

**mib-process**—(Optional) Display the MIB II process, which provides the router's MIB II agent.

**mobile-ip**—(Optional) Display the Mobile IP process, which configures Junos OS Mobile IP features.

**moundd-service**—(EX Series switches and MX Series routers only) (Optional) Display the service for NFS mounts requests.

**mpls-traceroute**—(Optional) Display the MPLS Periodic Traceroute process.

**mspd**—(Optional) Display the Multiservice process.

**multicast-snooping**—(EX Series switches and MX Series routers only) (Optional) Display the multicast snooping process, which makes Layer 2 devices such as VLAN switches aware of Layer 3 information, such as the media access control (MAC) addresses of members of a multicast group.

**named-service**—(Optional) Display the DNS Server process, which is used by a router or a switch to resolve hostnames into addresses.

**neighbor-liveness**—Display the process, which specifies the maximum length of time that the router waits for its neighbor to re-establish an LDP session.

**nfsd-service**—(Optional) Display the Remote NFS Server process, which provides remote file access for applications that need NFS-based transport.

**ntp**—Display the Network Time Protocol (NTP) process, which provides the mechanisms to synchronize time and coordinate time distribution in a large, diverse network.

**packet-triggered-subscribers**—Display the packet-triggered subscribers and policy control (PTSP) process, which allows the application of policies to dynamic subscribers that are controlled by a subscriber termination device.

**peer-selection-service**—(Optional) Display the Peer Selection Service process.

**periodic-packet-services**—Display the Periodic packet management process, which is responsible for processing a variety of time-sensitive periodic tasks so that other processes can more optimally direct their resources.

**pfe**—Display the Packet Forwarding Engine management process.

**pgcp-service**—(Optional) Display the pgcpd service process running on the Routing Engine.



- pgm**—Display the Pragmatic General Multicast (PGM) protocol process, which enables a reliable transport layer for multicast applications.
- pic-services-logging**—(Optional) Display the logging process for some PICs. With this process, also known as fsad (the file system access daemon), PICs send special logging information to the Routing Engine for archiving on the hard disk.
- ppp**—(Optional) Display the Point-to-Point Protocol (PPP) process, which is the encapsulation protocol process for transporting IP traffic across point-to-point links.
- ppp-service**—Display the Universal edge PPP process, which is the encapsulation protocol process for transporting IP traffic across universal edge routers.
- pppoe**—(Optional) Display the Point-to-Point Protocol over Ethernet (PPPoE) process, which combines PPP that typically runs over broadband connections with the Ethernet link-layer protocol that allows users to connect to a network of hosts over a bridge or access concentrator.
- process-monitor**—Display the process health monitor process (pmond).
- providers**—(Optional) Display provider processes.
- redundancy-interface-process**—(Optional) Display the ASP redundancy process.
- remote-operations**—(Optional) Display the remote operations process, which provides the ping and traceroute MIBs.
- resource-cleanup**—Display the resource cleanup process.
- resource-limits (brief | detail) *process-name***—(Optional) Display process resource limits.
- routing**—(Optional) Display the routing protocol process.
- sampling**—(Optional) Display the sampling process, which performs packet sampling based on particular input interfaces and various fields in the packet header.
- sbc-configuration-process**—Display the session border controller (SBC) process of the border signaling gateway (BSG).
- scc**—(TX Matrix routers only) (Optional) Display standard system process information for the TX Matrix router (or switch-card chassis).
- sdk-service**—Display the SDK Service process, which runs on the Routing Engine and is responsible for communications between the SDK application and Junos OS. Although the SDK Service process is present on the router, it is turned off by default.
- secure-neighbor-discovery**—(EX Series switches and MX Series routers only) (Optional) Display the secure Neighbor Discovery Protocol (NDP) process, which provides support for protecting NDP messages.
- send**—(Optional) Display the Secure Neighbor Discovery Protocol (SEND) process, which provides support for protecting Neighbor Discovery Protocol (NDP) messages.



**service-deployment**—(Optional) Display the service deployment process, which enables Junos OS to work with the Session and Resource Control (SRC) software.

**sfc *number***—(TX Matrix Plus routers only) (Optional) Display system process information for the TX Matrix Plus router (or switch-fabric chassis). Replace *number* with 0.

**snmp**—Display the SNMP process, which enables the monitoring of network devices from a central location and provides the router's or switch's SNMP master agent.

**sonet-aps**—Display the SONET Automatic Protection Switching (APS) process, which monitors any SONET interface that participates in APS.

**static-subscribers**—(Optional) Display the Static subscribers process, which associates subscribers with statically configured interfaces and provides dynamic service activation and activation for these subscribers.

**tunnel-oamd**—(Optional) Display the Tunnel OAM process, which enables the Operations, Administration, and Maintenance of Layer 2 tunneled networks. Layer 2 protocol tunneling (L2PT) allows service providers to send Layer 2 protocol data units (PDUs) across the provider's cloud and deliver them to Juniper Networks EX Series Ethernet Switches that are not part of the local broadcast domain.

**vrrp**—(EX Series switches and MX Series routers only) (Optional) Display the Virtual Router Redundancy Protocol (VRRP) process, which enables hosts on a LAN to make use of redundant routing platforms on that LAN without requiring more than the static configuration of a single default route on the hosts.

**watchdog**—Display the watchdog timer process, which enables the watchdog timer when Junos OS encounters a problem.

**wide**—(Optional) Display process information that might be wider than 80 columns.

**Additional Information** By default, when you issue the **show system processes** command on a TX Matrix or TX Matrix Plus master Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on the TX Matrix router) or T1600 (in a routing matrix based on the TX Matrix Plus router) master Routing Engines connected to it. Likewise, if you issue the same command on the TX Matrix or TX Matrix Plus backup Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on the TX Matrix router) or T1600 (in a routing matrix based on the TX Matrix Plus router) backup Routing Engines that are connected to it.

**Required Privilege Level**

view

**Related Documentation**

- List of Junos OS Processes

**List of Sample Output**

[show system processes on page 941](#)  
[show system processes brief on page 941](#)  
[show system processes detail on page 941](#)  
[show system processes extensive on page 942](#)



[show system processes lcc wide \(TX Matrix Routing Matrix\) on page 942](#)  
[show system processes summary on page 943](#)  
[show system processes \(TX Matrix Plus Router\) on page 943](#)  
[show system processes sfc \(TX Matrix Plus Router\) on page 951](#)  
[show system processes lcc wide \(TX Matrix Plus Routing Matrix\) on page 953](#)  
[show system processes \(QFX Series\) on page 955](#)

**Output Fields** [Table 73 on page 938](#) describes the output fields for the **show system processes** command. Output fields are listed in the approximate order in which they appear.

**Table 73: show system processes Output Fields**

Field Name	Field Description	Level of Output
<b>last pid</b>	Last process identifier assigned to the process.	brief extensive summary
<b>load averages</b>	Three load averages followed by the current time.	brief extensive summary
<b>processes</b>	Number of existing processes and the number of processes in each state ( <b>sleeping</b> , <b>running</b> , <b>starting</b> , <b>zombies</b> , and <b>stopped</b> ).	brief extensive summary
<b>Mem</b>	Information about physical and virtual memory allocation.	brief extensive summary
<b>Swap</b>	Information about physical and virtual memory allocation.	brief extensive summary
<b>PID</b>	Process identifier.	detail extensive summary
<b>TT</b>	Control terminal name.	none detail



Table 73: show system processes Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>STAT</b>	<p>Symbolic process state. The state is given by a sequence of letters. The first letter indicates the run state of the process:</p> <ul style="list-style-type: none"> <li>• <b>D</b>—In disk or other short-term, uninterruptible wait</li> <li>• <b>I</b>—Idle (sleeping longer than about 20 seconds)</li> <li>• <b>R</b>—Runnable</li> <li>• <b>S</b>—Sleeping for less than 20 seconds</li> <li>• <b>T</b>—Stopped</li> <li>• <b>Z</b>—Dead (zombie)</li> <li>• <b>+</b> —The process is in the foreground process group of its control terminal.</li> <li>• <b>&lt;</b>—The process has raised CPU scheduling priority.</li> <li>• <b>&gt;</b>—The process has specified a soft limit on memory requirements and is currently exceeding that limit; such a process is not swapped.</li> <li>• <b>A</b>—The process requested random page replacement.</li> <li>• <b>E</b>—The process is trying to exit.</li> <li>• <b>L</b>—The process has pages locked in core.</li> <li>• <b>N</b>—The process has reduced CPU scheduling priority.</li> <li>• <b>S</b>—The process requested first-in, first-out (FIFO) page replacement.</li> <li>• <b>s</b>—The process is a session leader.</li> <li>• <b>V</b>—The process is temporarily suspended.</li> <li>• <b>W</b>—The process is swapped out.</li> <li>• <b>X</b>—The process is being traced or debugged.</li> </ul>	none <b>detail</b>
<b>UID</b>	User identifier.	<b>detail</b>
<b>USERNAME</b>	Process owner.	<b>extensive summary</b>
<b>PPID</b>	Parent process identifier.	<b>detail</b>
<b>CPU</b>	<p>(D)—Short-term CPU usage.</p> <p>(E and S)—Raw (unweighted) CPU usage. The value of this field is used to sort the processes in the output.</p>	<b>detail extensive summary</b>
<b>RSS</b>	Resident set size.	<b>detail</b>
<b>WCHAN</b>	Symbolic name of the wait channel.	<b>detail</b>
<b>STARTED</b>	Local time when the process started running.	<b>detail</b>
<b>PRI</b>	Current priority of the process. A lower number indicates a higher priority.	<b>detail extensive summary</b>
<b>NI or NICE</b>	UNIX "niceness" value. A lower number indicates a higher priority.	<b>detail extensive summary</b>
<b>SIZE</b>	Total size of the process (text, data, and stack), in kilobytes.	<b>extensive summary</b>



Table 73: show system processes Output Fields (*continued*)

Field Name	Field Description	Level of Output
RES	Current amount of resident memory, in kilobytes.	extensive summary
STATE	Current state of the process (for example, <b>sleep</b> , <b>wait</b> , <b>run</b> , <b>idle</b> , <b>zombie</b> , or <b>stop</b> ).	extensive summary
TIME	(S)—Number of system and user CPU seconds that the process has used. (None, D, and E)—Total amount of time that the command has been running.	detail extensive summary
WCPU	Weighted CPU usage.	extensive summary
COMMAND	Command that is currently running.	detail extensive summary



## Sample Output

### show system processes

```
user@host> show system processes
PID  TT  STAT      TIME COMMAND
   0  ??  DLs       0:00.70 (swapper)
   1  ??  Is        0:00.35 /sbin/init --
   2  ??  DL        0:00.00 (pagedaemon)
   3  ??  DL        0:00.00 (vmdaemon)
   4  ??  DL        0:42.37 (update)
   5  ??  DL        0:00.00 (if_jnx)
  80  ??  Ss        0:14.66 syslogd -s
  96  ??  Is        0:00.01 portmap
 128  ??  Is        0:02.70 cron
 173  ??  Is        0:02.24 /usr/local/sbin/sshd (sshd1)
 189  ??  S         0:03.80 /sbin/watchdog -t180
 190  ??  I         0:00.03 /usr/sbin/tetd -N
 191  ??  S         2:24.76 /sbin/ibd -N
 192  ??  S<        0:55.44 /usr/sbin/xntpd -N
 195  ??  S         0:53.11 /usr/sbin/snmpd -N
 196  ??  S         1:15.73 /usr/sbin/mib2d -N
 198  ??  I         0:00.75 /usr/sbin/inetd -N
2677  ??  I         0:00.01 /usr/sbin/mgd -N
2712  ??  Ss        0:00.24 rlogind
2735  ??  R         0:00.00 /bin/ps -ax
1985  p0- S       0:07.41 ./rpd -N
2713  p0  Is        0:00.24 -tcsh (tcsh)
2726  p0  S+        0:00.07 cli
```

### show system processes brief

```
user@host> show system processes brief
last pid: 543; load averages: 0.00, 0.00, 0.00 18:29:47
37 processes: 1 running, 36 sleeping
```

```
Mem: 25M Active, 3976K Inact, 19M Wired, 8346K Buf, 202M Free
Swap: 528M Total, 64K Used, 528M Free
```

### show system processes detail

```
user@host> show system processes detail
PID  UID  PPID CPU PRI NI  RSS WCHAN  STARTED  TT  STAT      TIME COMMAND
3151 1049 3129  2  28  0  672 -      1:13PM  p0  R+       0:00.00 ps -ax -r
   1   0   0   0  10  0  376 wait   1:51PM  ??  Is       0:00.29 /sbin/ini
   2   0   0   0 -18  0   12 psleep  1:51PM  ??  DL       0:00.00 (pagedae
   3   0   0   0  28  0   12 psleep  1:51PM  ??  DL       0:00.00 (vmdaemo
   4   0   0   0  28  0   12 update   1:51PM  ??  DL       0:07.15 (update)
   5   0   0   0  2   0   12 pfesel   1:51PM  ??  IL       0:02.90 (if_pfe)
  27   0   1   0  10  0 17936 mfsidl    1:51PM  ??  Is       0:00.46 mfs /dev/
  81   0   1   0  2   0  496 select   1:52PM  ??  Ss       0:31.21 syslogd -
 119   1   1   0  2   0  492 select   1:52PM  ??  Is       0:00.00 portmap
 134   0   1   0  2   0  580 select   1:52PM  ??  S        0:02.95 amd -p -a
 151   0   1   0  18  0  532 pause   1:52PM  ??  Is       0:00.34 cron
 183   0   1   0  2   0  420 select   1:52PM  ??  Ss       0:00.07 /usr/loca
 206   0   1   0  18  0   72 pause   1:52PM  ??  S        0:00.51 /sbin/wat
 207   0   1   0  2   0  520 select   1:52PM  ??  I        0:00.16 /usr/sbin
 208   0   1   0  2   0  536 select   1:52PM  ??  S        0:08.21 /sbin/dcd
 210   0   1 255  2 -12  740 select   1:52PM  ??  S<       0:05.83 /usr/sbin
 211   0   1   0  2   0  376 select   1:52PM  ??  S        0:00.03 /usr/sbin
 215   0   1   0  2   0  548 select   1:52PM  ??  I        0:00.50 /usr/sbin
 219   0   1   0  3   0  540 ttyin   1:52PM  v0  Is+      0:00.02 /usr/libe
 220   0   1   0  3   0  540 ttyin   1:52PM  v1  Is+      0:00.01 /usr/libe
 221   0   1   0  3   0  540 ttyin   1:52PM  v2  Is+      0:00.01 /usr/libe
```



```

222    0    1    0    3    0 540 ttyin  1:52PM v3 Is+  0:00.01 /usr/libe
735    0    1    0    2    0 468 select 2:47PM ?? S    0:19.14 /usr/sbin
736    0    1    0    2    0 212 select 2:47PM ?? S    0:14.13 /usr/sbin
1380   0    1    0    3    0 888 ttyin  7:32PM d0 Is+  0:00.46 bash
3019   0    207   0    2    0 636 select 10:49AM ?? Ss   0:02.93 tnp.chass
3122   0    1380  0    2    0 1764 select 12:33PM d0 S    0:00.77 ./rpd -N
3128   0    215   0    2    0 580 select 12:45PM ?? Ss   0:00.12 rlogind
3129 1049 3128   0    18    0 944 pause 12:45PM p0 Ss   0:00.14 -tcsh (tc
      0    0    0    0 -18    0    0 sched  1:51PM ?? DLs  0:00.10 (swapper

```

#### show system processes extensive

```

user@host> show system processes extensive
last pid: 544; load averages: 0.00, 0.00 18:30:33
37 processes: 1 running, 36 sleeping

```

Mem: 25M Active, 3968K Inact, 19M Wired, 8346K Buf, 202M Free

Swap: 528M Total, 64K Used, 528M Free

PID	USERNAME	PRI	NICE	SIZE	RES	STATE	TIME	WCPU	CPU	COMMAND
544	root	30	0	604K	768K	RUN	0:00	0.00%	0.00%	top
3	root	28	0	0K	12K	psleep	0:00	0.00%	0.00%	vmdaemon
4	root	28	0	0K	12K	update	0:03	0.00%	0.00%	update
528	aviva	18	0	660K	948K	pause	0:00	0.00%	0.00%	tcsh
204	root	18	0	300K	544K	pause	0:00	0.00%	0.00%	csh
131	root	18	0	332K	532K	pause	0:00	0.00%	0.00%	cron
186	root	18	0	196K	68K	pause	0:00	0.00%	0.00%	watchdog
27	root	10	0	512M	16288K	mfsidl	0:00	0.00%	0.00%	mount_mfs
1	root	10	0	620K	344K	wait	0:00	0.00%	0.00%	init
304	root	3	0	884K	900K	ttyin	0:00	0.00%	0.00%	bash
200	root	3	0	180K	540K	ttyin	0:00	0.00%	0.00%	getty
203	root	3	0	180K	540K	ttyin	0:00	0.00%	0.00%	getty
202	root	3	0	180K	540K	ttyin	0:00	0.00%	0.00%	getty
201	root	3	0	180K	540K	ttyin	0:00	0.00%	0.00%	getty
194	root	2	0	2248K	1640K	select	0:11	0.00%	0.00%	rpd
205	root	2	0	964K	800K	select	0:12	0.00%	0.00%	tnp.chassisd
189	root	2	-12	352K	740K	select	0:03	0.00%	0.00%	xntpd
114	root	2	0	296K	612K	select	0:00	0.00%	0.00%	amd
188	root	2	0	780K	600K	select	0:00	0.00%	0.00%	dcd
527	root	2	0	176K	580K	select	0:00	0.00%	0.00%	rlogind
195	root	2	0	212K	552K	select	0:00	0.00%	0.00%	inetd
187	root	2	0	192K	532K	select	0:00	0.00%	0.00%	tnetd
83	root	2	0	188K	520K	select	0:00	0.00%	0.00%	syslogd
538	root	2	0	1324K	516K	select	0:00	0.00%	0.00%	mgd
99	daemon	2	0	176K	492K	select	0:00	0.00%	0.00%	portmap
163	root	2	0	572K	420K	select	0:00	0.00%	0.00%	nsrexecd
192	root	2	0	560K	400K	select	0:10	0.00%	0.00%	snmpd
191	root	2	0	1284K	376K	select	0:00	0.00%	0.00%	mgd
537	aviva	2	0	636K	364K	select	0:00	0.00%	0.00%	cli
193	root	2	0	312K	204K	select	0:07	0.00%	0.00%	mib2d
5	root	2	0	0K	12K	pfesel	0:00	0.00%	0.00%	if_pfe
2	root	-18	0	0K	12K	psleep	0:00	0.00%	0.00%	pagedaemon
0	root	-18	0	0K	0K	sched	0:00	0.00%	0.00%	swapper

#### show system processes lcc wide (TX Matrix Routing Matrix)

```

user@host> show system processes lcc 2 wide
lcc2-re0:

```

PID	TT	STAT	TIME	COMMAND
0	??	DLs	0:00.00	(swapper)
1	??	ILs	0:00.10	/sbin/preinit -- (init)
2	??	DL	0:00.00	(pagedaemon)
3	??	DL	0:00.00	(vmdaemon)
4	??	DL	0:00.00	(bufdaemon)



```

5 ?? DL 0:00.04 (syncer)
6 ?? DL 0:00.00 (netdaemon)
7 ?? IL 0:00.00 (if_pic_listen)
8 ?? IL 0:00.00 (scs_housekeeping)
9 ?? IL 0:00.00 (if_pfe_listen)
10 ?? DL 0:00.00 (vmuncachedaemon)
11 ?? SL 0:00.02 (cb_poll)
172 ?? ILs 0:00.21 mfs -o noauto /dev/ad1s1b /tmp (newfs)
2909 ?? Is 0:00.00 pccardd
2932 ?? Ss 0:00.07 syslogd -r -s
3039 ?? Is 0:00.00 cron
3217 ?? I 0:00.00 /sbin/watchdog -d
3218 ?? I 0:00.02 /usr/sbin/tnetd -N
3221 ?? S 0:00.11 /usr/sbin/alarmd -N
3222 ?? S 0:00.85 /usr/sbin/craftd -N
3223 ?? S 0:00.05 /usr/sbin/mgd -N
3224 ?? I 0:00.02 /usr/sbin/inetd -N
3225 ?? I 0:00.00 /usr/sbin/tnp.sntpd -N
3226 ?? I 0:00.01 /usr/sbin/tnp.sntpc -N
3228 ?? I 0:00.01 /usr/sbin/smartd -N
3231 ?? I 0:00.01 /usr/sbin/eccd -N
3425 ?? S 0:00.09 /usr/sbin/dfwd -N
3426 ?? S 0:00.19 /sbin/dcd -N
3427 ?? I 0:00.04 /usr/sbin/pfed -N
3430 ?? S 0:00.10 /usr/sbin/ksyncd -N
3482 ?? S 1:53.63 /usr/sbin/chassisd -N
4285 ?? SL 0:00.01 (peer proxy)
4286 ?? SL 0:00.00 (peer proxy)
4303 ?? Ss 0:00.00 mgd: (mgd) (root) (mgd)
4304 ?? R 0:00.00 /bin/ps -ax -ww
3270 d0 Is+ 0:00.00 /usr/libexec/getty std.9600 ttyd0

```

#### show system processes summary

```

user@host> show system processes summary
last pid: 543; load averages: 0.00, 0.00, 0.00 18:29:47
37 processes: 1 running, 36 sleeping

Mem: 25M Active, 3976K Inact, 19M Wired, 8346K Buf, 202M Free
Swap: 528M Total, 64K Used, 528M Free

```

PID	USERNAME	PRI	NICE	SIZE	RES	STATE	TIME	WCPU	CPU	COMMAND
527	root	2	0	176K	580K	select	0:00	0.04%	0.04%	rlogind
543	root	30	0	604K	768K	RUN	0:00	0.00%	0.00%	top

#### show system processes (TX Matrix Plus Router)

```

user@host> show system processes
sfc0-re0:

```

```

-----
PID TT STAT TIME COMMAND
0 ?? Wls 0:00.00 [swapper]
1 ?? ILs 0:00.18 /packages/mnt/jbase/sbin/init --
2 ?? DL 0:00.20 [g_event]
3 ?? DL 0:00.39 [g_up]
4 ?? DL 0:00.32 [g_down]
5 ?? DL 0:00.00 [thread taskq]
6 ?? DL 0:00.09 [kqueue taskq]
7 ?? DL 0:00.01 [pagedaemon]
8 ?? DL 0:00.00 [vmdaemon]
9 ?? DL 0:06.63 [pagezero]
10 ?? DL 0:00.00 [ktrace]
11 ?? RL 310:52.98 [idle]
12 ?? WL 0:11.03 [swi2: net]

```



```

13 ?? WL 0:27.58 [swi7: clock sio]
14 ?? WL 0:00.00 [swi6: vm]
15 ?? DL 0:03.02 [yarrow]
16 ?? WL 0:00.00 [swi9: +]
17 ?? WL 0:00.00 [swi8: +]
18 ?? WL 0:00.00 [swi5: cambio]
19 ?? WL 0:00.00 [swi9: task queue]
20 ?? WL 0:11.41 [irq16: uhci0 uhci*]
21 ?? DL 0:00.00 [usb0]
22 ?? DL 0:00.00 [usbtask]
23 ?? WL 0:39.51 [irq17: uhci1 uhci*]
24 ?? DL 0:00.00 [usb1]
25 ?? WL 0:00.00 [irq18: uhci2 uhci*]
26 ?? DL 0:00.83 [usb2]
27 ?? DL 0:00.00 [usb3]
28 ?? DL 0:00.00 [usb4]
29 ?? DL 0:00.00 [usb5]
30 ?? DL 0:00.73 [usb6]
31 ?? DL 0:00.00 [usb7]
32 ?? WL 0:00.00 [irq14: ata0]
33 ?? WL 0:00.00 [irq15: ata1]
34 ?? WL 0:00.00 [irq1: atkbd0]
35 ?? WL 0:00.00 [swi0: sio]
36 ?? WL 0:00.00 [irq11: isab0]
37 ?? WL 0:00.00 [swi3: ip6opt ipopt]
38 ?? WL 0:00.00 [swi4: ip6mismatch+]
39 ?? WL 0:00.00 [swi1: ipfwd]
40 ?? DL 0:00.02 [bufdaemon]
41 ?? DL 0:00.02 [vnlr]
42 ?? DL 0:00.39 [syncer]
43 ?? DL 0:00.05 [softdepflush]
44 ?? DL 0:00.00 [netdaemon]
45 ?? DL 0:00.02 [vmuncachedaemon]
46 ?? DL 0:00.00 [if_pic_listen]
47 ?? DL 0:00.35 [vmkmemdaemon]
48 ?? DL 0:00.00 [cb_poll]
49 ?? DL 0:00.06 [if_pfe_listen]
50 ?? DL 0:00.00 [scs_housekeeping]
51 ?? IL 0:00.00 [kern_dump_proc]
52 ?? IL 0:00.00 [nfsiod 0]
53 ?? IL 0:00.00 [nfsiod 1]
54 ?? IL 0:00.00 [nfsiod 2]
55 ?? IL 0:00.00 [nfsiod 3]
56 ?? DL 0:00.37 [schedcpu]
57 ?? DL 0:00.56 [md0]
79 ?? DL 0:02.58 [md1]
100 ?? DL 0:00.03 [md2]
118 ?? DL 0:00.01 [md3]
139 ?? DL 0:00.95 [md4]
160 ?? DL 0:00.12 [md5]
181 ?? DL 0:00.00 [md6]
217 ?? DL 0:00.02 [md7]
227 ?? DL 0:00.05 [md8]
1341 ?? SL 0:01.34 [bcmTX]
1342 ?? SL 0:01.68 [bcmXGS3AsyncTX]
1343 ?? SL 0:41.40 [bcmLINK.0]
1345 ?? SL 0:33.83 [bcmLINK.1]
1350 ?? Is 0:00.01 /usr/sbin/cron
1502 ?? S 0:00.01 /sbin/watchdog -t-1
1503 ?? S 0:00.86 /usr/libexec/bslockd -mp -N
1504 ?? S 0:00.01 /usr/sbin/tnetd -N

```



```

1507 ?? S      0:01.32 /usr/sbin/alarmd -N
1508 ?? S      0:14.54 /usr/sbin/craftd -N
1509 ?? S      0:01.19 /usr/sbin/mgd -N
1512 ?? I      0:00.05 /usr/sbin/inetd -N
1513 ?? S      0:00.10 /usr/sbin/tnp.snptd -N
1517 ?? S      0:00.11 /usr/sbin/smartd -N
1525 ?? S      0:01.10 /usr/sbin/idpd -N
1526 ?? S      0:01.43 /usr/sbin/license-check -U -M -p 10 -i 10
1527 ?? I      0:00.01 /usr/libexec/getty Pc ttyv0
1616 ?? DL     0:00.30 [peer proxy]
1617 ?? DL     0:00.32 [peer proxy]
1618 ?? DL     0:00.34 [peer proxy]
1619 ?? DL     0:00.30 [peer proxy]
2391 ?? Is     0:00.01 telnetd
7331 ?? Ss     0:00.03 telnetd
9538 ?? DL     0:01.16 [jsr_kkcm]
9613 ?? DL     0:00.18 [peer proxy]
23781 ?? Ss    0:00.01 telnetd
23926 ?? Ss    0:00.01 mgd: (mgd) (regress)/dev/tty2 (mgd)
36867 ?? S      0:03.14 /usr/sbin/rpd -N
36874 ?? S      0:00.08 /usr/sbin/lmpd
36876 ?? S      0:00.17 /usr/sbin/lacpd -N
36877 ?? S      0:00.15 /usr/sbin/bfdd -N
36878 ?? S      0:05.05 /usr/sbin/ppmd -N
36907 ?? S      0:25.07 /usr/sbin/chassisd -N
37775 ?? S      0:00.01 /usr/sbin/bdbrepd -N
45727 ?? S      0:00.02 /usr/sbin/xntpd -j -N -g (ntpd)
45729 ?? S      0:00.38 /usr/sbin/l2ald -N
45730 ?? S<    0:00.12 /usr/sbin/apsd -N
45731 ?? SN     0:00.10 /usr/sbin/sampled -N
45732 ?? S      0:00.03 /usr/sbin/ilmid -N
45733 ?? S      0:00.09 /usr/sbin/rmopd -N
45734 ?? S      0:00.30 /usr/sbin/cosd
45735 ?? I      0:00.00 /usr/sbin/rtspd -N
45736 ?? S      0:00.06 /usr/sbin/fsad -N
45737 ?? S      0:00.05 /usr/sbin/rdd -N
45738 ?? S      0:00.10 /usr/sbin/pppd -N
45739 ?? S      0:00.05 /usr/sbin/dfcd -N
45740 ?? S      0:00.07 /usr/sbin/lfmd -N
45741 ?? S      0:00.01 /usr/sbin/mpisoamd -N
45742 ?? I      0:00.01 /usr/sbin/sendd -N
45743 ?? S      0:00.08 /usr/sbin/appidd -N
45744 ?? S      0:00.05 /usr/sbin/mspd -N
45745 ?? S      0:00.25 /usr/sbin/jdiameterd -N
45746 ?? S      0:00.10 /usr/sbin/pfed -N
45747 ?? S      0:00.19 /usr/sbin/lpdfd -N
45748 ?? S      0:00.63 /sbin/dcd -N
45750 ?? S      0:00.45 /usr/sbin/mib2d -N
45751 ?? S      0:00.15 /usr/sbin/dfwd -N
45752 ?? S      0:00.15 /usr/sbin/irsd -N
45764 ?? S      0:20.59 /usr/sbin/snmpd -N
56479 ?? Ss    0:00.00 mgd: (mgd) (root) (mgd)
56480 ?? R      0:00.00 /bin/ps -ax
1142 d0- I      0:00.01 /usr/sbin/usbd -N
1160 d0- S      0:29.17 /usr/sbin/eventd -N -r -s -A
6527 d0 Is+    0:00.00 /usr/libexec/getty std.9600 ttyd0
2392 p1 Is     0:00.00 login [pam] (login)
2393 p1 I      0:00.00 -csh (csh)
2394 p1 I      0:00.00 su -
2395 p1 I+     0:00.01 -su (csh)
23782 p2 Is     0:00.00 login [pam] (login)

```



```

23881 p2 I      0:00.00 -csh (csh)
23925 p2 S+    0:00.03 cli
7332  p3 Is    0:00.00 login [pam] (login)
7333  p3 I      0:00.00 -csh (csh)
23780 p3 S+    0:00.02 telnet aj

```

```
lcc0-re0:
```

```

-----
PID  TT  STAT      TIME COMMAND
  0  ??  Wls    0:00.00 [swapper]
  1  ??  ILs    0:00.16 /packages/mnt/jbase/sbin/init --
  2  ??  DL     0:00.01 [g_event]
  3  ??  DL     0:00.16 [g_up]
  4  ??  DL     0:00.11 [g_down]
  5  ??  DL     0:00.00 [thread taskq]
  6  ??  DL     0:00.00 [kqueue taskq]
  7  ??  DL     0:00.00 [pagedaemon]
  8  ??  DL     0:00.00 [vmdaemon]
  9  ??  DL     0:01.77 [pagezero]
10  ??  DL     0:00.00 [ktrace]
11  ??  RL    17:22.31 [idle]
12  ??  WL     0:00.32 [swi2: net]
13  ??  WL     0:01.21 [swi7: clock sio]
14  ??  WL     0:00.00 [swi6: vm]
15  ??  DL     0:00.10 [yarrow]
16  ??  WL     0:00.00 [swi9: +]
17  ??  WL     0:00.00 [swi8: +]
18  ??  WL     0:00.00 [swi5: cambio]
19  ??  WL     0:00.00 [swi9: task queue]
20  ??  WL     0:02.73 [irq10: bcm0 uhci1*]
21  ??  WL     0:00.02 [irq11: cb0 uhci0+*]
22  ??  DL     0:00.00 [usb0]
23  ??  DL     0:00.00 [usbtask]
24  ??  DL     0:00.00 [usb1]
25  ??  DL     0:00.05 [usb2]
26  ??  DL     0:00.00 [usb3]
27  ??  DL     0:00.00 [usb4]
28  ??  DL     0:00.00 [usb5]
29  ??  DL     0:00.04 [usb6]
30  ??  DL     0:00.00 [usb7]
31  ??  WL     0:00.00 [irq14: ata0]
32  ??  WL     0:00.00 [irq15: ata1]
33  ??  WL     0:00.00 [irq1: atkbd0]
34  ??  WL     0:00.00 [swi0: sio]
35  ??  WL     0:00.00 [swi3: ip6opt ipopt]
36  ??  WL     0:00.00 [swi4: ip6mismatch+]
37  ??  WL     0:00.00 [swi1: ipfwd]
38  ??  DL     0:00.00 [bufdaemon]
39  ??  DL     0:00.00 [vn1ru]
40  ??  DL     0:00.01 [syncer]
41  ??  DL     0:00.00 [softdepflush]
42  ??  DL     0:00.00 [netdaemon]
43  ??  DL     0:00.00 [vmuncachedaemon]
44  ??  DL     0:00.00 [if_pic_listen]
45  ??  DL     0:00.02 [vmkmemdaemon]
46  ??  DL     0:00.01 [cb_poll]
47  ??  DL     0:00.00 [if_pfe_listen]
48  ??  DL     0:00.00 [scs_housekeeping]
49  ??  IL     0:00.00 [kern_dump_proc]
50  ??  IL     0:00.00 [nfsiod 0]
51  ??  IL     0:00.00 [nfsiod 1]

```



```

52 ?? IL 0:00.00 [nfsiod 2]
53 ?? IL 0:00.00 [nfsiod 3]
54 ?? DL 0:00.01 [schedcpu]
55 ?? DL 0:00.73 [md0]
77 ?? DL 0:03.54 [md1]
98 ?? DL 0:00.37 [md2]
116 ?? DL 0:00.02 [md3]
137 ?? DL 0:00.56 [md4]
158 ?? DL 0:00.15 [md5]
179 ?? DL 0:00.00 [md6]
215 ?? DL 0:00.03 [md7]
225 ?? DL 0:00.03 [md8]
1078 ?? DL 0:00.00 [jsr_kkcm]
1363 ?? SL 0:00.09 [bcmTX]
1364 ?? SL 0:00.10 [bcmXGS3AsyncTX]
1365 ?? SL 0:03.08 [bcmLINK.0]
1370 ?? Is 0:00.00 /usr/sbin/cron
1522 ?? S 0:00.00 /sbin/watchdog -t-1
1523 ?? S 0:00.05 /usr/libexec/bslockd -mp -N
1524 ?? I 0:00.01 /usr/sbin/tnetd -N
1526 ?? S 0:04.98 /usr/sbin/chassisd -N
1527 ?? S 0:00.04 /usr/sbin/alarmd -N
1528 ?? I 0:00.40 /usr/sbin/craftd -N
1529 ?? S 0:00.08 /usr/sbin/mgd -N
1532 ?? I 0:00.04 /usr/sbin/inetd -N
1533 ?? I 0:00.00 /usr/sbin/tnp.snptd -N
1534 ?? I 0:00.00 /usr/sbin/tnp.snptc -N
1536 ?? S 0:00.01 /usr/sbin/smartd -N
1540 ?? I 0:00.07 /usr/sbin/jcsd -N
1541 ?? S 0:00.11 /usr/sbin/idpd -N
1542 ?? I 0:00.00 /usr/libexec/getty Pc ttyv0
2089 ?? DL 0:00.01 [peer proxy]
2090 ?? DL 0:00.01 [peer proxy]
2091 ?? DL 0:00.01 [peer proxy]
2657 ?? S 0:00.02 /usr/sbin/dfwd -N
2658 ?? S 0:00.02 /sbin/dcd -N
2659 ?? S 0:00.05 /usr/sbin/snmpd -N
2660 ?? S 0:00.01 /usr/sbin/mib2d -N
2661 ?? S 0:00.01 /usr/sbin/pfed -N
2662 ?? S 0:00.01 /usr/sbin/irsd -N
2667 ?? S 0:00.13 /usr/sbin/ksyncd -N
2690 ?? Ss 0:00.00 mgd: (mgd) (root) (mgd)
2691 ?? R 0:00.00 /bin/ps -ax
1164 d0- S 0:00.00 /usr/sbin/usbd -N
1182 d0- S 0:00.34 /usr/sbin/eventd -N -r -s -A
1543 d0 Is+ 0:00.00 /usr/libexec/getty std.9600 ttyd0

```

```
lcc1-re0:
```

```

-----
PID TT STAT TIME COMMAND
0 ?? Wls 0:00.00 [swapper]
1 ?? ILs 0:00.17 /packages/mnt/jbase/sbin/init --
2 ?? DL 0:00.01 [g_event]
3 ?? DL 0:00.16 [g_up]
4 ?? DL 0:00.11 [g_down]
5 ?? DL 0:00.00 [thread taskq]
6 ?? DL 0:00.00 [kqueue taskq]
7 ?? DL 0:00.00 [pagedaemon]
8 ?? DL 0:00.00 [vmdaemon]
9 ?? DL 0:01.77 [pagezero]
10 ?? DL 0:00.00 [ktrace]

```



```

11 ?? RL 17:22.83 [idle]
12 ?? WL 0:00.35 [swi2: net]
13 ?? WL 0:01.20 [swi7: clock sio]
14 ?? WL 0:00.00 [swi6: vm]
15 ?? DL 0:00.10 [yarrow]
16 ?? WL 0:00.00 [swi9: +]
17 ?? WL 0:00.00 [swi8: +]
18 ?? WL 0:00.00 [swi5: cambio]
19 ?? WL 0:00.00 [swi9: task queue]
20 ?? WL 0:02.87 [irq10: bcm0 uhci1*]
21 ?? WL 0:00.02 [irq11: cb0 uhci0+*]
22 ?? DL 0:00.00 [usb0]
23 ?? DL 0:00.00 [usbtask]
24 ?? DL 0:00.00 [usb1]
25 ?? DL 0:00.05 [usb2]
26 ?? DL 0:00.00 [usb3]
27 ?? DL 0:00.00 [usb4]
28 ?? DL 0:00.00 [usb5]
29 ?? DL 0:00.04 [usb6]
30 ?? DL 0:00.00 [usb7]
31 ?? WL 0:00.00 [irq14: ata0]
32 ?? WL 0:00.00 [irq15: ata1]
33 ?? WL 0:00.00 [irq1: atkbd0]
34 ?? WL 0:00.00 [swi0: sio]
35 ?? WL 0:00.00 [swi3: ip6opt ipopt]
36 ?? WL 0:00.00 [swi4: ip6mismatch+]
37 ?? WL 0:00.00 [swi1: ipfwd]
38 ?? DL 0:00.00 [bufdaemon]
39 ?? DL 0:00.00 [vn1ru]
40 ?? DL 0:00.01 [syncer]
41 ?? DL 0:00.00 [softdepflush]
42 ?? DL 0:00.00 [netdaemon]
43 ?? DL 0:00.00 [vmuncachedaemon]
44 ?? DL 0:00.00 [if_pic_listen]
45 ?? DL 0:00.02 [vmkmemdaemon]
46 ?? DL 0:00.01 [cb_poll]
47 ?? DL 0:00.00 [if_pfe_listen]
48 ?? DL 0:00.00 [scs_housekeeping]
49 ?? IL 0:00.00 [kern_dump_proc]
50 ?? IL 0:00.00 [nfsiod 0]
51 ?? IL 0:00.00 [nfsiod 1]
52 ?? IL 0:00.00 [nfsiod 2]
53 ?? IL 0:00.00 [nfsiod 3]
54 ?? DL 0:00.02 [schedcpu]
55 ?? DL 0:00.75 [md0]
77 ?? DL 0:03.40 [md1]
98 ?? DL 0:00.37 [md2]
116 ?? DL 0:00.02 [md3]
137 ?? DL 0:00.56 [md4]
158 ?? DL 0:00.15 [md5]
179 ?? DL 0:00.00 [md6]
215 ?? DL 0:00.03 [md7]
225 ?? DL 0:00.03 [md8]
1052 ?? DL 0:00.00 [jsr_kkcm]
1337 ?? SL 0:00.09 [bcmTX]
1338 ?? SL 0:00.10 [bcmXGS3AsyncTX]
1339 ?? SL 0:03.10 [bcmLINK.0]
1344 ?? Is 0:00.00 /usr/sbin/cron
1496 ?? S 0:00.00 /sbin/watchdog -t-1
1497 ?? S 0:00.05 /usr/libexec/bslockd -mp -N
1498 ?? I 0:00.01 /usr/sbin/tnetd -N

```



```

1500 ?? S      0:04.97 /usr/sbin/chassisd -N
1501 ?? S      0:00.04 /usr/sbin/alarmd -N
1502 ?? I      0:00.40 /usr/sbin/craftd -N
1503 ?? S      0:00.08 /usr/sbin/mgd -N
1506 ?? I      0:00.04 /usr/sbin/inetd -N
1507 ?? I      0:00.00 /usr/sbin/tnp.sntpd -N
1508 ?? I      0:00.00 /usr/sbin/tnp.sntpc -N
1510 ?? S      0:00.01 /usr/sbin/smartd -N
1514 ?? I      0:00.07 /usr/sbin/jcsd -N
1515 ?? S      0:00.18 /usr/sbin/idpd -N
1516 ?? I      0:00.00 /usr/libexec/getty Pc ttyv0
2068 ?? DL     0:00.01 [peer proxy]
2069 ?? DL     0:00.01 [peer proxy]
2070 ?? DL     0:00.01 [peer proxy]
2666 ?? S      0:00.02 /sbin/dcd -N
2667 ?? S      0:00.01 /usr/sbin/irsd -N
2668 ?? S      0:00.01 /usr/sbin/pfed -N
2669 ?? S      0:00.05 /usr/sbin/snmpd -N
2670 ?? S      0:00.01 /usr/sbin/mib2d -N
2671 ?? S      0:00.02 /usr/sbin/dfwd -N
2675 ?? S      0:00.13 /usr/sbin/ksyncd -N
2699 ?? Ss     0:00.00 mgd: (mgd) (root) (mgd)
2700 ?? R      0:00.00 /bin/ps -ax
1138 d0- S     0:00.00 /usr/sbin/usbd -N
1156 d0- S     0:00.37 /usr/sbin/eventd -N -r -s -A
1517 d0 Is+    0:00.00 /usr/libexec/getty std.9600 ttyd0

```

lcc2-re0:

```

-----
PID TT  STAT      TIME COMMAND
  0 ??  Wls      0:00.00 [swapper]
  1 ??  ILs      0:00.18 /packages/mnt/jbase/sbin/init --
  2 ??  DL        0:00.01 [g_event]
  3 ??  DL        0:00.17 [g_up]
  4 ??  DL        0:00.12 [g_down]
  5 ??  DL        0:00.00 [thread taskq]
  6 ??  DL        0:00.00 [kqueue taskq]
  7 ??  DL        0:00.00 [pagedaemon]
  8 ??  DL        0:00.00 [vmdaemon]
  9 ??  DL        0:01.77 [pagezero]
 10 ??  DL        0:00.00 [ktrace]
 11 ??  RL      17:19.13 [idle]
 12 ??  WL        0:00.36 [swi2: net]
 13 ??  WL        0:01.20 [swi7: clock sio]
 14 ??  WL        0:00.00 [swi6: vm]
 15 ??  DL        0:00.13 [yarrow]
 16 ??  WL        0:00.00 [swi9: +]
 17 ??  WL        0:00.00 [swi8: +]
 18 ??  WL        0:00.00 [swi5: cambio]
 19 ??  WL        0:00.00 [swi9: task queue]
 20 ??  WL        0:03.03 [irq10: bcm0 uhci1*]
 21 ??  WL        0:00.02 [irq11: cb0 uhci0+*]
 22 ??  DL        0:00.00 [usb0]
 23 ??  DL        0:00.00 [usbtask]
 24 ??  DL        0:00.00 [usb1]
 25 ??  DL        0:00.05 [usb2]
 26 ??  DL        0:00.00 [usb3]
 27 ??  DL        0:00.00 [usb4]
 28 ??  DL        0:00.00 [usb5]
 29 ??  DL        0:00.04 [usb6]
 30 ??  DL        0:00.00 [usb7]

```



```

31 ?? WL 0:00.00 [irq14: ata0]
32 ?? WL 0:00.00 [irq15: ata1]
33 ?? WL 0:00.00 [irq1: atkbd0]
34 ?? WL 0:00.00 [swi0: sio]
35 ?? WL 0:00.00 [swi3: ip6opt ipopt]
36 ?? WL 0:00.00 [swi4: ip6mismatch+]
37 ?? WL 0:00.00 [swi1: ipfwd]
38 ?? DL 0:00.00 [bufdaemon]
39 ?? DL 0:00.00 [vnlr]
40 ?? DL 0:00.01 [syncer]
41 ?? DL 0:00.00 [softdepflush]
42 ?? DL 0:00.00 [netdaemon]
43 ?? DL 0:00.00 [vmuncachedaemon]
44 ?? DL 0:00.00 [if_pic_listen]
45 ?? DL 0:00.02 [vmkmemdaemon]
46 ?? DL 0:00.01 [cb_poll]
47 ?? DL 0:00.00 [if_pfe_listen]
48 ?? DL 0:00.00 [scs_housekeeping]
49 ?? IL 0:00.00 [kern_dump_proc]
50 ?? IL 0:00.00 [nfsiod 0]
51 ?? IL 0:00.00 [nfsiod 1]
52 ?? IL 0:00.00 [nfsiod 2]
53 ?? IL 0:00.00 [nfsiod 3]
54 ?? DL 0:00.02 [schedcpu]
55 ?? DL 0:00.75 [md0]
77 ?? DL 0:03.48 [md1]
98 ?? DL 0:00.59 [md2]
116 ?? DL 0:00.02 [md3]
137 ?? DL 0:00.56 [md4]
158 ?? DL 0:00.15 [md5]
179 ?? DL 0:00.00 [md6]
215 ?? DL 0:00.03 [md7]
225 ?? DL 0:00.03 [md8]
1052 ?? DL 0:00.00 [jsr_kkcm]
1337 ?? SL 0:00.09 [bcmTX]
1338 ?? SL 0:00.10 [bcmXGS3AsyncTX]
1339 ?? SL 0:03.22 [bcmLINK.0]
1344 ?? Is 0:00.00 /usr/sbin/cron
1496 ?? S 0:00.00 /sbin/watchdog -t-1
1497 ?? S 0:00.05 /usr/libexec/bslockd -mp -N
1498 ?? S 0:00.01 /usr/sbin/tnetd -N
1500 ?? R 0:05.17 /usr/sbin/chassisd -N
1501 ?? S 0:00.04 /usr/sbin/alarmd -N
1502 ?? I 0:00.39 /usr/sbin/craftd -N
1503 ?? S 0:00.08 /usr/sbin/mgd -N
1506 ?? I 0:00.05 /usr/sbin/inetd -N
1507 ?? I 0:00.00 /usr/sbin/tnp.snptd -N
1508 ?? I 0:00.00 /usr/sbin/tnp.snptc -N
1510 ?? S 0:00.01 /usr/sbin/smartd -N
1514 ?? I 0:00.07 /usr/sbin/jcsd -N
1515 ?? S 0:00.17 /usr/sbin/idpd -N
1516 ?? I 0:00.00 /usr/libexec/getty Pc ttyv0
2591 ?? DL 0:00.01 [peer proxy]
2592 ?? DL 0:00.01 [peer proxy]
2593 ?? DL 0:00.01 [peer proxy]
2597 ?? DL 0:00.00 [peer proxy]
3192 ?? S 0:00.01 /usr/sbin/irsd -N
3193 ?? S 0:00.05 /usr/sbin/snmpd -N
3194 ?? S 0:00.02 /sbin/dcd -N
3195 ?? S 0:00.01 /usr/sbin/pfed -N
3196 ?? S 0:00.01 /usr/sbin/mib2d -N

```



```

3197 ?? S      0:00.02 /usr/sbin/dfwd -N
3198 ?? S      0:00.13 /usr/sbin/ksyncd -N
3228 ?? Ss     0:00.00 mgd: (mgd) (root) (mgd)
3229 ?? R      0:00.00 /bin/ps -ax
1138 d0- S     0:00.00 /usr/sbin/usbd -N
1156 d0- S     0:00.42 /usr/sbin/eventd -N -r -s -A
1517 d0 Is+    0:00.00 /usr/libexec/getty std.9600 ttyd0
...

```

show system  
processes sfc (TX  
Matrix Plus Router)

```

user@host> show system processes sfc 0
sfc0-re0:

```

```

-----
PID  TT  STAT      TIME COMMAND
  0  ??  Wls      0:00.00 [swapper]
  1  ??  SLs      0:00.18 /packages/mnt/jbase/sbin/init --
  2  ??  DL       0:00.20 [g_event]
  3  ??  DL       0:00.39 [g_up]
  4  ??  DL       0:00.32 [g_down]
  5  ??  DL       0:00.00 [thread taskq]
  6  ??  DL       0:00.09 [kqueue taskq]
  7  ??  DL       0:00.01 [pagedaemon]
  8  ??  DL       0:00.00 [vmdaemon]
  9  ??  DL       0:06.63 [pagezero]
 10  ??  DL       0:00.00 [ktrace]
 11  ??  RL      312:09.00 [idle]
 12  ??  WL       0:11.07 [swi2: net]
 13  ??  WL       0:27.70 [swi7: clock sio]
 14  ??  WL       0:00.00 [swi6: vm]
 15  ??  DL       0:03.03 [yarrow]
 16  ??  WL       0:00.00 [swi9: +]
 17  ??  WL       0:00.00 [swi8: +]
 18  ??  WL       0:00.00 [swi5: cambio]
 19  ??  WL       0:00.00 [swi9: task queue]
 20  ??  WL       0:11.46 [irq16: uhci0 uhci*]
 21  ??  DL       0:00.00 [usb0]
 22  ??  DL       0:00.00 [usbtask]
 23  ??  WL       0:39.63 [irq17: uhci1 uhci*]
 24  ??  DL       0:00.00 [usb1]
 25  ??  WL       0:00.00 [irq18: uhci2 uhci*]
 26  ??  DL       0:00.84 [usb2]
 27  ??  DL       0:00.00 [usb3]
 28  ??  DL       0:00.00 [usb4]
 29  ??  DL       0:00.00 [usb5]
 30  ??  DL       0:00.73 [usb6]
 31  ??  DL       0:00.00 [usb7]
 32  ??  WL       0:00.00 [irq14: ata0]
 33  ??  WL       0:00.00 [irq15: ata1]
 34  ??  WL       0:00.00 [irq1: atkbd0]
 35  ??  WL       0:00.00 [swi0: sio]
 36  ??  WL       0:00.00 [irq11: isab0]
 37  ??  WL       0:00.00 [swi3: ip6opt ipopt]
 38  ??  WL       0:00.00 [swi4: ip6mismatch+]
 39  ??  WL       0:00.00 [swi1: ipfwd]
 40  ??  DL       0:00.02 [bufdaemon]
 41  ??  DL       0:00.02 [vnlr]
 42  ??  DL       0:00.39 [syncer]
 43  ??  DL       0:00.05 [softdepflush]
 44  ??  DL       0:00.00 [netdaemon]
 45  ??  DL       0:00.02 [vmuncachedaemon]
 46  ??  DL       0:00.00 [if_pic_listen]
 47  ??  DL       0:00.35 [vmkmemdaemon]

```



```

48 ?? DL 0:00.00 [cb_poll]
49 ?? DL 0:00.06 [if_pfe_listen]
50 ?? DL 0:00.00 [scs_housekeeping]
51 ?? IL 0:00.00 [kern_dump_proc]
52 ?? IL 0:00.00 [nfsiod 0]
53 ?? IL 0:00.00 [nfsiod 1]
54 ?? IL 0:00.00 [nfsiod 2]
55 ?? IL 0:00.00 [nfsiod 3]
56 ?? DL 0:00.37 [schedcpu]
57 ?? DL 0:00.56 [md0]
79 ?? DL 0:02.58 [md1]
100 ?? DL 0:00.03 [md2]
118 ?? DL 0:00.01 [md3]
139 ?? DL 0:00.95 [md4]
160 ?? DL 0:00.12 [md5]
181 ?? DL 0:00.00 [md6]
217 ?? DL 0:00.02 [md7]
227 ?? DL 0:00.05 [md8]
1341 ?? SL 0:01.35 [bcmTX]
1342 ?? SL 0:01.69 [bcmXGS3AsyncTX]
1343 ?? SL 0:41.57 [bcmLINK.0]
1345 ?? SL 0:33.97 [bcmLINK.1]
1350 ?? Is 0:00.01 /usr/sbin/cron
1502 ?? S 0:00.01 /sbin/watchdog -t-1
1503 ?? S 0:00.86 /usr/libexec/bslockd -mp -N
1504 ?? I 0:00.01 /usr/sbin/tnetd -N
1507 ?? S 0:01.32 /usr/sbin/alarmd -N
1508 ?? S 0:14.54 /usr/sbin/craftd -N
1509 ?? S 0:01.20 /usr/sbin/mgd -N
1512 ?? S 0:00.05 /usr/sbin/inetd -N
1513 ?? S 0:00.10 /usr/sbin/tnp.snmpd -N
1517 ?? S 0:00.11 /usr/sbin/smard -N
1525 ?? S 0:01.11 /usr/sbin/idpd -N
1526 ?? S 0:01.43 /usr/sbin/license-check -U -M -p 10 -i 10
1527 ?? I 0:00.01 /usr/libexec/getty Pc ttyv0
1616 ?? DL 0:00.30 [peer proxy]
1617 ?? DL 0:00.32 [peer proxy]
1618 ?? DL 0:00.34 [peer proxy]
1619 ?? DL 0:00.30 [peer proxy]
2391 ?? Is 0:00.01 telnetd
7331 ?? Ss 0:00.03 telnetd
9538 ?? DL 0:01.16 [jsr_kkcm]
9613 ?? DL 0:00.18 [peer proxy]
23781 ?? Ss 0:00.01 telnetd
23926 ?? Ss 0:00.03 mgd: (mgd) (regress)/dev/tty2 (mgd)
36867 ?? S 0:03.14 /usr/sbin/rpd -N
36874 ?? S 0:00.08 /usr/sbin/lmpd
36876 ?? S 0:00.17 /usr/sbin/lacpd -N
36877 ?? S 0:00.15 /usr/sbin/bfdd -N
36878 ?? S 0:05.05 /usr/sbin/ppmd -N
36907 ?? S 0:26.63 /usr/sbin/chassisd -N
37775 ?? S 0:00.01 /usr/sbin/bdbrepd -N
45727 ?? S 0:00.02 /usr/sbin/xntpd -j -N -g (ntpd)
45729 ?? S 0:00.40 /usr/sbin/l2ald -N
45730 ?? S< 0:00.13 /usr/sbin/apsd -N
45731 ?? SN 0:00.10 /usr/sbin/sampled -N
45732 ?? S 0:00.03 /usr/sbin/ilmid -N
45733 ?? S 0:00.09 /usr/sbin/rmopd -N
45734 ?? S 0:00.31 /usr/sbin/cosd
45735 ?? I 0:00.00 /usr/sbin/rtspd -N
45736 ?? S 0:00.06 /usr/sbin/fsad -N

```



```

45737 ?? S      0:00.05 /usr/sbin/rdd -N
45738 ?? S      0:00.10 /usr/sbin/pppd -N
45739 ?? S      0:00.05 /usr/sbin/dfcd -N
45740 ?? S      0:00.08 /usr/sbin/lfmd -N
45741 ?? S      0:00.01 /usr/sbin/mpiisoamd -N
45742 ?? I      0:00.01 /usr/sbin/sendd -N
45743 ?? S      0:00.08 /usr/sbin/appidd -N
45744 ?? S      0:00.05 /usr/sbin/mspd -N
45745 ?? S      0:00.27 /usr/sbin/jdiameterd -N
45746 ?? S      0:00.10 /usr/sbin/pfed -N
45747 ?? S      0:00.19 /usr/sbin/lpdfd -N
45748 ?? S      0:00.64 /sbin/dcd -N
45750 ?? S      0:00.46 /usr/sbin/mib2d -N
45751 ?? S      0:00.16 /usr/sbin/dfwd -N
45752 ?? S      0:00.15 /usr/sbin/irsd -N
45764 ?? S      0:20.60 /usr/sbin/snmpd -N
56481 ?? Ss     0:00.02 telnetd
56548 ?? Rs     0:00.19 mgd: (mgd) (regress)/dev/tty0 (mgd)
56577 ?? Ss     0:00.00 mgd: (mgd) (root) (mgd)
56578 ?? R      0:00.00 /bin/ps -ax
  1142 d0- S     0:00.01 /usr/sbin/usbd -N
  1160 d0- S     0:29.71 /usr/sbin/eventd -N -r -s -A
  6527 d0 Is+   0:00.00 /usr/libexec/getty std.9600 ttyd0
56482 p0 Is     0:00.00 login [pam] (login)
56483 p0 S      0:00.01 -csh (csh)
56547 p0 S+     0:00.02 cli
  2392 p1 Is     0:00.00 login [pam] (login)
  2393 p1 I      0:00.00 -csh (csh)
  2394 p1 I      0:00.00 su -
  2395 p1 I+     0:00.01 -su (csh)
23782 p2 Is     0:00.00 login [pam] (login)
23881 p2 I      0:00.00 -csh (csh)
23925 p2 S+     0:00.03 cli
  7332 p3 Is     0:00.00 login [pam] (login)
  7333 p3 I      0:00.00 -csh (csh)
23780 p3 S+     0:00.02 telnet aj

```

show system  
processes lcc wide (TX)

```

user@host> show system processes lcc 2 wide
lcc2-re0:

```



Matrix Plus  
Routing Matrix)

PID	TT	STAT	TIME	PROVIDER	COMMAND
0	??	WLS	0:00.00	(null)	[swapper]
1	??	ILs	0:00.19		/packages/mnt/jbase/sbin/init --
2	??	DL	0:00.02		[g_event]
3	??	DL	0:00.19		[g_up]
4	??	DL	0:00.13		[g_down]
5	??	DL	0:00.00		[thread taskq]
6	??	DL	0:00.00		[kqueue taskq]
7	??	DL	0:00.00		[pagedaemon]
8	??	DL	0:00.00		[vmdaemon]
9	??	DL	0:01.77		[pagezero]
10	??	DL	0:00.00		[ktrace]
11	??	RL	20:33.81		[idle]
12	??	WL	0:00.38		[swi2: net]
13	??	WL	0:01.43		[swi7: clock sio]
14	??	WL	0:00.00		[swi6: vm]
15	??	DL	0:00.14		[yarrow]
16	??	WL	0:00.00		[swi9: +]
17	??	WL	0:00.00		[swi8: +]
18	??	WL	0:00.00		[swi5: cambio]
19	??	WL	0:00.00		[swi9: task queue]
20	??	WL	0:03.18		[irq10: bcm0 uhci1*]
21	??	WL	0:00.03		[irq11: cb0 uhci0+*]
22	??	DL	0:00.00		[usb0]
23	??	DL	0:00.00		[usbtask]
24	??	DL	0:00.00		[usb1]
25	??	DL	0:00.06		[usb2]
26	??	DL	0:00.00		[usb3]
27	??	DL	0:00.00		[usb4]
28	??	DL	0:00.00		[usb5]
29	??	DL	0:00.05		[usb6]
30	??	DL	0:00.00		[usb7]
31	??	WL	0:00.00		[irq14: ata0]
32	??	WL	0:00.00		[irq15: ata1]
33	??	WL	0:00.00		[irq1: atkbd0]
34	??	WL	0:00.00		[swi0: sio]
35	??	WL	0:00.00		[swi3: ip6opt ipopt]
36	??	WL	0:00.00		[swi4: ip6mismatch+]
37	??	WL	0:00.00		[swi1: ipfwd]
38	??	DL	0:00.00		[bufdaemon]
39	??	DL	0:00.00		[vnlru]
40	??	DL	0:00.02		[syncer]
41	??	DL	0:00.01		[softdepflush]
42	??	DL	0:00.00		[netdaemon]
43	??	DL	0:00.00		[vmuncachedaemon]
44	??	DL	0:00.00		[if_pic_listen]
45	??	DL	0:00.03		[vmkmemdaemon]
46	??	DL	0:00.01		[cb_poll]
47	??	DL	0:00.00		[if_pfe_listen]
48	??	DL	0:00.00		[scs_housekeeping]
49	??	IL	0:00.00		[kern_dump_proc]
50	??	IL	0:00.00		[nfsiod 0]
51	??	IL	0:00.00		[nfsiod 1]
52	??	IL	0:00.00		[nfsiod 2]
53	??	IL	0:00.00		[nfsiod 3]
54	??	DL	0:00.02		[schedcpu]
55	??	DL	0:00.75		[md0]
77	??	DL	0:03.84		[md1]
98	??	DL	0:00.59		[md2]
116	??	DL	0:00.02		[md3]
137	??	DL	0:00.72		[md4]



```

158 ?? DL 0:00.15 [md5]
179 ?? DL 0:00.00 [md6]
215 ?? DL 0:00.03 [md7]
225 ?? DL 0:00.03 [md8]
1052 ?? DL 0:00.00 [jsr_kkcm]
1337 ?? SL 0:00.11 [bcmTX]
1338 ?? SL 0:00.12 [bcmXGS3AsyncTX]
1339 ?? SL 0:03.82 [bcmLINK.0]
1344 ?? Is 0:00.00 /usr/sbin/cron
1496 ?? I 0:00.00 /sbin/watchdog -t-1
1497 ?? S 0:00.06 /usr/libexec/bslockd -mp -N
1498 ?? I 0:00.01 /usr/sbin/tnetd -N
1500 ?? S 0:09.93 /usr/sbin/chassisd -N
1501 ?? S 0:00.05 /usr/sbin/alarmd -N
1502 ?? I 0:00.39 /usr/sbin/craftd -N
1503 ?? S 0:00.09 /usr/sbin/mgd -N
1506 ?? I 0:00.05 /usr/sbin/inetd -N
1507 ?? I 0:00.00 /usr/sbin/tnp.sntpd -N
1508 ?? I 0:00.00 /usr/sbin/tnp.sntpc -N
1510 ?? S 0:00.01 /usr/sbin/smartd -N
1514 ?? I 0:00.07 /usr/sbin/jcsd -N
1515 ?? S 0:00.17 /usr/sbin/idpd -N
1516 ?? I 0:00.00 /usr/libexec/getty Pc ttyv0
2591 ?? DL 0:00.01 [peer proxy]
2592 ?? DL 0:00.01 [peer proxy]
2593 ?? DL 0:00.01 [peer proxy]
2597 ?? DL 0:00.01 [peer proxy]
3192 ?? S 0:00.02 /usr/sbin/irsd -N
3193 ?? S 0:00.05 /usr/sbin/snmpd -N
3194 ?? S 0:00.04 /sbin/dcd -N
3195 ?? I 0:00.01 /usr/sbin/pfed -N
3196 ?? S 0:00.02 /usr/sbin/mib2d -N
3197 ?? I 0:00.03 /usr/sbin/dfwd -N
3198 ?? S 0:00.15 /usr/sbin/ksyncd -N
3559 ?? Ss 0:00.00 mgd: (mgd) (root) (mgd)
3560 ?? R 0:00.00 /bin/ps -ax -jppw
1138 d0- S 0:00.00 /usr/sbin/usbd -N
1156 d0- S 0:00.50 /usr/sbin/eventd -N -r -s -A
1517 d0 Is+ 0:00.00 /usr/libexec/getty std.9600 ttyd0

```

#### show system processes (QFX Series)

```

user@switch> show system processes
PID  TT  STAT      TIME COMMAND
 0  ??  Wls -2341043:-31.01 [swapper]
 1  ??  SLs 0:01.34 /packages/mnt/jbase/sbin/init --
 2  ??  DL 2:48.31 [g_event]
 3  ??  DL 1:47.44 [g_up]
 4  ??  DL 1:37.82 [g_down]
 5  ??  DL 0:00.00 [kdm_tcp_poller]
 6  ??  DL 0:00.00 [thread taskq]
 7  ??  DL 0:04.86 [kqueue taskq]
 9  ??  DL 0:03.94 [pagedaemon]
10  ??  DL 0:00.00 [ktrace]
11  ??  RL 0:00.00 [idle: cpu31]
12  ??  RL 0:00.00 [idle: cpu30]
13  ??  RL 0:00.00 [idle: cpu29]
14  ??  RL 0:00.00 [idle: cpu28]
15  ??  RL 0:00.00 [idle: cpu27]
16  ??  RL 0:00.00 [idle: cpu26]
17  ??  RL 0:00.00 [idle: cpu25]
18  ??  RL 0:00.00 [idle: cpu24]
19  ??  RL 0:00.00 [idle: cpu23]

```



```

20 ?? RL      0:00.00 [idle: cpu22]
21 ?? RL      0:00.00 [idle: cpu21]
22 ?? RL      0:00.00 [idle: cpu20]
23 ?? RL      0:00.00 [idle: cpu19]
24 ?? RL      0:00.00 [idle: cpu18]
25 ?? RL      0:00.00 [idle: cpu17]
26 ?? RL      0:00.00 [idle: cpu16]
27 ?? RL      0:00.00 [idle: cpu15]
28 ?? RL      0:00.00 [idle: cpu14]
29 ?? RL      0:00.00 [idle: cpu13]
30 ?? RL      0:00.00 [idle: cpu12]
31 ?? RL      0:00.00 [idle: cpu11]
32 ?? RL      0:00.00 [idle: cpu10]
33 ?? RL      0:00.00 [idle: cpu9]
34 ?? RL      18184:07.25 [idle: cpu8]
35 ?? RL      0:00.00 [idle: cpu7]
36 ?? RL      17862:11.31 [idle: cpu6]
37 ?? RL      19343:45.16 [idle: cpu5]
38 ?? RL      5192:38.30 [idle: cpu4]
39 ?? RL      0:00.00 [idle: cpu3]
40 ?? RL      19278:02.24 [idle: cpu2]
41 ?? RL      19291:00.72 [idle: cpu1]
42 ?? RL      18910:31.21 [idle: cpu0]
43 ?? WL      19:03.74 [swi2: net]
44 ?? WL      261:43.82 [swi7: clock sio]
45 ?? WL      0:00.00 [swi6: vm]
46 ?? DL      2:18.57 [yarrow]
47 ?? WL      0:00.00 [swi9: +]
48 ?? WL      0:00.00 [swi8: +]
49 ?? WL      0:12.36 [swi5: cambio]
50 ?? WL      0:00.00 [swi9: task queue]
51 ?? WL      0:00.00 [swi0: sio]
52 ?? WL      0:32.40 [irq39: ehci0]
53 ?? DL      0:00.21 [usb0]
54 ?? DL      0:00.00 [usbtask]
55 ?? WL      0:00.00 [irq22: xlr_lbus0]
56 ?? WL      0:00.00 [irq38: xlr_lbus0]
57 ?? WL      0:00.00 [swi3: ip6opt ipopt]
58 ?? WL      0:00.00 [swi4: ip6mismatch+]
59 ?? WL      0:00.00 [swi1: ipfwd]
60 ?? DL      0:18.65 [pagezero]
61 ?? DL      0:18.59 [bufdaemon]
62 ?? DL      1:10.44 [vnlru_mem]
63 ?? DL      1:51.66 [syncer]
64 ?? DL      0:20.22 [vnlru]
65 ?? DL      0:40.48 [softdepflush]
66 ?? DL      0:00.00 [netdaemon]
67 ?? DL      20:47.67 [vmkmemdaemon]
68 ?? DL      0:00.00 [if_pfe_listen]
69 ?? SL      0:02.80 [kdm_checkkcore]
70 ?? SL      0:03.34 [kdm_savekcore]
71 ?? SL      0:04.31 [kdm_livekcore]
72 ?? SL      0:06.14 [kdm_logger]
73 ?? SL      0:04.31 [kdm_kdb]
74 ?? SL      0:00.02 [devrt_kernel_thread]
75 ?? DL      0:21.54 [vmuncachedaemon]
76 ?? DL      0:00.00 [if_pic_listen0]
77 ?? SL      0:00.00 [nfsiod 0]
78 ?? SL      0:00.00 [nfsiod 1]
79 ?? SL      0:00.00 [nfsiod 2]
80 ?? SL      0:00.00 [nfsiod 3]

```



```

81 ?? WL      5:59.98 [irq13: +]
82 ?? RL    105:06.81 [pkt_sender: cpu0]
83 ?? DL      0:03.62 [md0]
95 ?? DL      0:37.04 [md1]
115 ?? DL     0:06.01 [md2]
135 ?? DL     0:00.75 [md3]
155 ?? DL     0:21.17 [md4]
175 ?? DL     0:01.90 [md5]
195 ?? DL     0:06.26 [md6]
231 ?? DL     0:00.01 [md7]
755 ?? Ss     0:04.17 /usr/sbin/cron
847 ?? S      0:00.10 /usr/sbin/tnetd -N
849 ?? S      0:06.82 /usr/sbin/mgd -N
850 ?? S      0:00.32 /usr/sbin/inetd -N
852 ?? S      1:05.34 /usr/sbin/dhcpd -N
853 ?? S      0:00.18 /usr/sbin/inetd -p /var/run/inetd_4.pid -N -JU __juni
855 ?? L    1181:02.21 /usr/sbin/dc-pfe -N (pafxpc)
857 ?? S      17:55.86 /usr/sbin/vccpd -N
896 ?? S      93:43.45 /usr/sbin/chassism -N
953 ?? S      0:02.89 /sbin/watchdog -t-1
954 ?? S      3:34.00 /sbin/dcd -N
955 ?? S     10:30.13 /usr/sbin/chassisd -N
956 ?? DL     0:00.21 [peer proxy]
957 ?? S      4:07.43 /usr/sbin/alarmd -N
958 ?? S      0:31.69 /usr/sbin/craftd -N
959 ?? S      0:55.16 /usr/sbin/mib2d -N
960 ?? S      3:40.64 /usr/sbin/rpd -N
961 ?? S      0:00.03 /usr/sbin/tnp.sntpd -N
962 ?? S      0:51.94 /usr/sbin/pfed -N
963 ?? S      0:47.31 /usr/sbin/rmopd -N
964 ?? S      0:33.65 /usr/sbin/cosd
965 ?? S      1:48.41 /usr/sbin/ppmd -N
966 ?? S      0:07.18 /usr/sbin/dfwd -N
967 ?? S      1:02.56 /usr/sbin/bfdd -N
968 ?? S      0:00.63 /usr/sbin/rdd -N
969 ?? S      0:40.61 /usr/sbin/dfcd -N
971 ?? S      0:07.81 /usr/sbin/bdbrepd -N
972 ?? S      0:00.28 /usr/sbin/sendd -N
973 ?? S      1:37.69 /usr/sbin/xntpd -j -N -g -JU __juniper_private4__ (nt
974 ?? S      5:56.28 /usr/sbin/snmpd -N -JU __juniper_private4__
975 ?? S     16:46.82 /usr/sbin/jdiameterd -N
976 ?? S      2:34.13 /usr/sbin/eswd -N
977 ?? S      1:03.05 /usr/sbin/sflowd -N
978 ?? S      0:22.30 /usr/sbin/fcd -N
979 ?? S      1:07.01 /usr/sbin/vccpdf -N
982 ?? S      0:25.25 /usr/sbin/mcsnoopd -N
983 ?? S      3:45.68 /usr/sbin/rpdf -N
1043 ?? S      0:37.87 /usr/sbin/lacpd -N
1048 ?? DL     0:01.29 [peer proxy]
1111 ?? WL     0:00.00 [swi2: FMNITHRD+]
1112 ?? DL     0:00.03 [peer proxy]
12816 ?? S    15:35.32 /usr/sbin/sfid -N
30893 ?? Ss    0:00.65 sshd: tlewis@tty0 (sshd)
30897 ?? Ss    0:00.15 mgd: (mgd) (tlewis)/dev/tty0 (mgd)
30905 ?? Ss    0:00.64 sshd: tlewis@tty1 (sshd)
30909 ?? Ss    0:00.15 mgd: (mgd) (tlewis)/dev/tty1 (mgd)
30910 ?? Ss    0:01.26 sshd: tcheng@tty2 (sshd)
30914 ?? Ss    0:00.80 mgd: (mgd) (tcheng)/dev/tty2 (mgd)
30937 ?? R      0:00.03 /bin/ps -ax
661 d0- S      0:21.24 /usr/sbin/eventd -N -r -s -A
860 d0 Ss+     0:00.07 /usr/libexec/getty std.9600 ttyd0

```



30896	p0	Ss+	0:00.55	-cli	(cli)
30908	p1	Ss+	0:00.50	-cli	(cli)
30913	p2	Ss+	0:00.85	-cli	(cli)



## show system reboot

<b>Syntax</b>	show system reboot <both-routing-engines>
<b>Syntax (EX Series Switches)</b>	show system reboot <all-members> <both-routing-engines> <local> <member <i>member-id</i> >
<b>Syntax (TX Matrix Router)</b>	show system reboot <all-chassis   all-lcc   lcc <i>number</i>   scc> <both-routing-engines>
<b>Syntax (TX Matrix Plus Router)</b>	show system reboot <all-chassis   all-lcc   lcc <i>number</i>   sfc <i>number</i> > <both-routing-engines>
<b>Syntax (MX Series Router)</b>	show system reboot <all-members> <both-routing-engines> <local> <member <i>member-id</i> >
<b>Syntax (QFX Series)</b>	show system reboot <both-routing-engines> <infrastructure <i>name</i> > <interconnect-device <i>name</i> > <node-device <i>name</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display pending system reboots or halts.
<b>Options</b>	<p><b>none</b>—Display pending reboots or halts on the active Routing Engine.</p> <p><b>all-chassis</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display halt or reboot request information for all the T640 routers in the chassis that are connected to the TX Matrix router. On a TX Matrix Plus router, display halt or reboot request information for all the T1600 routers in the chassis that are connected to the TX Matrix Plus router.</p> <p><b>all-members</b>—(EX4200 switches and MX Series routers only) (Optional) Display halt or reboot request information for all members of the Virtual Chassis configuration.</p> <p><b>all-lcc</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display system halt or reboot request information for all T640 routers (or line-card chassis) connected to the TX Matrix router. On a TX Matrix Plus router, display halt</p>



or reboot request information for all T1600 routers (or line-card chassis) connected to the TX Matrix Plus router

**both-routing-engines**—(Systems with multiple Routing Engines) (Optional) Display halt or reboot request information on both Routing Engines.

**infrastructure *name***—(QFabric systems only) (Optional) Display reboot request information on the fabric manager Routing Engines and fabric control Routing Engines.

**interconnect-device *name***—(QFabric systems only) (Optional) Display reboot request information on the Interconnect device.

**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display halt or reboot request information for a specific T640 router that is connected to the TX Matrix router. On a TX Matrix Plus router, display halt or reboot request information for a specific T1600 router that is connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.

**local**—(EX4200 switches and MX Series routers only) (Optional) Display halt or reboot request information for the local Virtual Chassis member.

**member *member-id***—(EX4200 switches and MX Series routers only) (Optional) Display halt or reboot request information for the specified member of the Virtual Chassis configuration. For EX4200 switches, replace ***member-id*** with a value from 0 through 9. For an MX Series Virtual Chassis, replace ***member-id*** with a value of 0 or 1.

**node-group *name***—(QFabric systems only) (Optional) Display reboot request information on the Node group.

**scc**—(TX Matrix router only) (Optional) Display halt or reboot request information for the TX Matrix router (or switch-card chassis).

**sfc**—(TX Matrix Plus router only) (Optional) Display halt or reboot request information for the TX Matrix Plus router (or switch-fabric chassis).

**Additional Information** By default, when you issue the **show system reboot** command on a TX Matrix or TX Matrix Plus master Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on the TX Matrix router) or T1600 (in a routing matrix based on the TX Matrix Plus router) master Routing Engines connected to it. Likewise, if you issue the same command on the TX Matrix or TX Matrix Plus backup Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on the TX Matrix router) or T1600 (in a routing matrix based on the TX Matrix Plus router) backup Routing Engines that are connected to it.

**Required Privilege Level** maintenance

**List of Sample Output** [show system reboot on page 961](#)  
[show system reboot all-lcc \(TX Matrix Router\) on page 961](#)  
[show system reboot sfc \(TX Matrix Plus Router\) on page 961](#)  
[show system reboot \(QFX3500 Switch\) on page 961](#)



## Sample Output

**show system reboot**

```
user@host> show system reboot
reboot requested by root at Wed Feb 10 17:40:46 1999
[process id 17885]
```

**show system reboot  
all-lcc (TX Matrix  
Router)**

```
user@host> show system reboot all-lcc
lcc0-re0:
```

```
-----
No shutdown/reboot scheduled.
```

```
lcc2-re0:
```

```
-----
No shutdown/reboot scheduled.
```

**show system reboot  
sfc (TX Matrix Plus  
Router)**

```
user@host> show system sfc 0
No shutdown/reboot scheduled.
```

**show system reboot  
(QFX3500 Switch)**

```
user@switch> show system reboot
No shutdown/reboot scheduled.
```



## show system resource-cleanup processes

<b>Syntax</b>	show system resource-cleanup processes <detail> <pid <i>number</i> > <process-name <i>name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 9.3. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the list of processes that have been registered for resource cleanup services.
<b>Options</b>	<p><b>detail</b>—(Optional) Display the list of processes that have been registered for resource cleanup services, along with the resources that have been requested for cleanup.</p> <p><b>pid <i>number</i></b>—(Optional) Display a process that has been registered for resource cleanup services by specifying the Process Identifier number.</p> <p><b>process-name <i>name</i></b>—(Optional) Display a process that has been registered for resource cleanup services by name of the process.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show system resource-cleanup processes on page 963</a> <a href="#">show system resource-cleanup processes detail on page 963</a>
<b>Output Fields</b>	For a description of the output fields, see <a href="#">Table 74 on page 962</a> . Output fields are listed in the approximate order in which they appear.

**Table 74: show system resource-cleanup processes Output Fields**

Field Name	Field Description
PID	Process ID, a number that identifies a process.
Process name	String that identifies the process.
Resources to clean	Resources that have been registered to be cleaned up.



## Sample Output

**show system  
resource-cleanup  
processes**

```
user@host> show system resource-cleanup processes
PID      Process name      Resources to clean
420      jnx-exampld       GENCFG, SYSV shared memory
```

**show system  
resource-cleanup  
processes detail**

```
user@host> show system resource-cleanup processes detail
PID      Process name      Resources to clean
420      jnx-exampld       GENCFG blob major ID 0x8000, minor ID 0x0000
          SYSV shared memory ID 65536, key 1108955839
          SYSV shared memory ID 65537, key 1108955837
```



## show system rollback

---

**Syntax**    `show system rollback number`  
              `<compare number>`

**Release Information**    Command introduced before Junos OS Release 7.4.  
                              Command introduced in Junos OS Release 9.0 for EX Series switches.  
                              Command introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Display the contents of a previously committed configuration, or the differences between two previously committed configurations.



.....  
**NOTE:** The `show system rollback` command is a purely operational mode command and cannot be issued with `run` from the configuration mode.  
.....

**Options**    *number*—Number of a configuration to view. The output displays the configuration. The range of values is 0 through 49.

`compare number`—(Optional) Number of another previously committed (rollback) configuration to compare to rollback *number*. The output displays the differences between the two configurations. The range of values is 0 through 49.

**Required Privilege Level**    view

**List of Sample Output**    [show system rollback compare on page 965](#)



## Sample Output

```

show system rollback 3 compare 1
compare
user@host> show system rollback 3 compare 1
[edit]
+ interfaces {
+   ge-1/1/1 {
+     unit 0 {
+       family inet {
+         filter {
+           input mf_plp;
+         }
+         address 14.1.1.1/30;
+       }
+     }
+   }
+   ge-1/2/1 {
+     unit 0 {
+       family inet {
+         filter {
+           input mf_plp;
+         }
+         address 13.1.1.1/30;
+       }
+     }
+   }
+   ge-1/3/0 {
+     unit 0 {
+       family inet {
+         filter {
+           input mf_plp;
+         }
+         address 12.1.1.1/30;
+       }
+     }
+   }
+ }
+}

```



## show system services service-deployment

<b>Syntax</b>	show system services service-deployment
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display information about a Session and Resource Control (SRC) client.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	system view
<b>List of Sample Output</b>	<a href="#">show system services service-deployment on page 966</a>
<b>Output Fields</b>	<a href="#">Table 75 on page 966</a> lists the output fields for the <b>show system services service-deployment</b> command. Output fields are listed in the approximate order in which they appear.

**Table 75: show system services service-deployment Output Fields**

Field Name	Field Description
PDT Keepalive settings	Configured PDT keepalive interval, in seconds.
Keepalives sent	Number of keepalives sent.
Notifications sent	Number of notifications sent.
Last update from peer	Time at which the last update from a peer was received.

## Sample Output

### show system services service-deployment

```
user@host> show system services service-deployment
Connected to 192.4.4.4 port 10288 since 2004-05-03 11:04:34 PDT Keepalive settings:
Interval 15 seconds Keepalives sent: 750 Notifications sent: 0 Last update from
peer: 00:00:06 ago
```



## show system software

<b>Syntax</b>	show system software <detail>
<b>Syntax (EX Series Switches)</b>	show system software <all-members> <detail> <local> <member <i>member-id</i> >
<b>Syntax (TX Matrix Router)</b>	show system software <all-chassis   all-lcc   lcc <i>number</i>   scc> <detail>
<b>Syntax (TX Matrix Plus Router)</b>	show system software <all-chassis   all-lcc   lcc <i>number</i>   sfc <i>number</i> > <detail>
<b>Syntax (J Series Routers)</b>	show system software <backup> <detail>
<b>Syntax (QFX Series)</b>	show system software <detail> <infrastructure <i>name</i> > <interconnect-device <i>name</i> > <node-group <i>name</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the Junos OS extensions loaded on your router or switch.
<b>Options</b>	<p><b>none</b>—Display standard information about all loaded Junos OS extensions.</p> <p><b>all-chassis</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) Display system software information for all the T640 routers (TX Matrix Router) or all the T1600 routers (TX Matrix Plus Router) in the chassis.</p> <p><b>all-lcc</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display system software information for all T640 routers (or line-card chassis) connected to the TX Matrix router. On a TX Matrix Plus router, display system software information for all T1600 routers (or line-card chassis) connected to the TX Matrix Plus router</p> <p><b>all-members</b>—(EX4200 switches only) (Optional) Display the system software running on all members of the Virtual Chassis configuration.</p>



**backup**—(J Series routers only) (Optional) Display the status of old system software packages only.

**detail**—(Optional) Display detailed information about available Junos OS extensions.

**infrastructure *name***—(QFabric systems only) (Optional) Display the system software running on the fabric control Routing Engine and the fabric manager Routing Engine.

**interconnect-device *name***—(QFabric systems only) (Optional) Display the system software running on the Interconnect device.

**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display system software information for a specific T640 router that is connected to the TX Matrix router. On a TX Matrix Plus router, display system software information for a specific T1600 router that is connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.

**local**—(EX4200 switches only) (Optional) Display the system software running on the local Virtual Chassis member.

**member *member-id***—(EX4200 switches only) (Optional) Display the system software running on the specified member of the Virtual Chassis configuration. Replace ***member-id*** with a value from 0 through 9.

**node-group *name***—(QFabric systems only) (Optional) Display the system software running on the Node group.

**scc**—(Routing matrix only) (Optional) Display the system software running on a TX Matrix router (or switch-card chassis).

**sfc**—(TX Matrix Plus routers only) (Optional) Display system software information for the TX Matrix Plus router (or switch-fabric chassis).

**Required Privilege Level** maintenance

**List of Sample Output** [show system software on page 969](#)  
[show system software \(TX Matrix Plus Router\) on page 969](#)  
[show system software \(QFX Series\) on page 973](#)

**Output Fields** When you enter this command, you are provided a list of Junos OS packages installed on the router and their corresponding Junos OS release number.



## Sample Output

```
show system software user@host> show system software
Information for jbase:

Comment:
JUNOS Base OS Software Suite [7.2R1.7]

Information for jcrypto:

Comment:
JUNOS Crypto Software Suite [7.2R1.7]
Information for jdocs:

Comment:
JUNOS Online Documentation [7.2R1.7]

Information for jkernel:

Comment:
JUNOS Kernel Software Suite [7.2R1.7]

Information for jpfe:

Comment:
JUNOS Packet Forwarding Engine Support (M20/M40) [7.2R1.7]

Information for jroute:

Comment:
JUNOS Routing Software Suite [7.2R1.7]

Information for junos:

Comment:
JUNOS Base OS boot [7.2R1.7]
```

```
show system software user@host> show system software
(TX Matrix Plus sfc0-re0:
Router) -----
Information for jbase:

Comment:
JUNOS Base OS Software Suite [9.6-20090515.0]

Information for jcrypto:

Comment:
JUNOS Crypto Software Suite [9.6-20090515.0]
```



Information for jdocs:

Comment:

JUNOS Online Documentation [9.6-20090515.0]

Information for jkernel:

Comment:

JUNOS Kernel Software Suite [9.6-20090515.0]

Information for jpfe:

Comment:

JUNOS Packet Forwarding Engine Support (T-Series) [9.6-20090515.0]

Information for jpfe-common:

Comment:

JUNOS Packet Forwarding Engine Support (M/T Common) [9.6-20090515.0]

Information for jroute:Comment:

JUNOS Routing Software Suite [9.6-20090515.0]

Information for jservices-aacl:

Comment:

JUNOS Services ACL Container package [9.6-20090515.0]

Information for jservices-appid:

Comment:

JUNOS AppId Services [9.6-20090515.0]

Information for jservices-bgf:

Comment:

JUNOS Border Gateway Function package [9.6-20090515.0]

Information for jservices-idp:

Comment:

JUNOS IDP Services [9.6-20090515.0]

Information for jservices-llpdf:

Comment:

JUNOS Services LL-PDF Container package [9.6-20090515.0]



## Information for jservices-sfw:

## Comment:

JUNOS Services Stateful Firewall [9.6-20090515.0]

## Information for jservices-voice:

## Comment:

JUNOS Voice Services Container package [9.6-20090515.0]

## Information for junos:

## Comment:

JUNOS Base OS boot [9.6-20090515.0]

...

|cc0-re0:

-----  
Information for jbase:

## Comment:

JUNOS Base OS Software Suite [9.6-20090515.0]

## Information for jcrypto:

## Comment:

JUNOS Crypto Software Suite [9.6-20090515.0]

## Information for jdocs:

## Comment:

JUNOS Online Documentation [9.6-20090515.0]

## Information for jkernel:

## Comment:

JUNOS Kernel Software Suite [9.6-20090515.0]

## Information for jpfe:

## Comment:

JUNOS Packet Forwarding Engine Support (T-Series) [9.6-20090515.0]

## Information for jpfe-common:

## Comment:

JUNOS Packet Forwarding Engine Support (M/T Common) [9.6-20090515.0]



Information for jroute:

Comment:

JUNOS Routing Software Suite [9.6-20090515.0]

Information for jservices-aacl:

Comment:

JUNOS Services ACL Container package [9.6-20090515.0]

Information for jservices-appid:

Comment:

JUNOS AppId Services [9.6-20090515.0]

Information for jservices-bgf:

Comment:

JUNOS Border Gateway Function package [9.6-20090515.0]

Information for jservices-idp:

Comment:

JUNOS IDP Services [9.6-20090515.0]

Information for jservices-llpdf:

Comment:

JUNOS Services LL-PDF Container package [9.6-20090515.0]

Information for jservices-sfw:

Comment:

JUNOS Services Stateful Firewall [9.6-20090515.0]

Information for jservices-voice:

Comment:

JUNOS Voice Services Container package [9.6-20090515.0]

Information for junos:

Comment:

JUNOS Base OS boot [9.6-20090515.0]



```
lcc1-re0:
```

```
-----  
Information for jbase:
```

```
Comment:  
JUNOS Base OS Software Suite [9.6-20090515.0]
```

```
Information for jcrypto:
```

```
Comment:  
JUNOS Crypto Software Suite [9.6-20090515.0]  
...
```

### show system software (QFX Series)

```
user@switch> show system software  
Information for jbase:
```

```
Comment:  
JUNOS Base OS Software Suite [11.3-20110730.0]
```

```
Information for jcrypto:
```

```
Comment:  
JUNOS Crypto Software Suite [11.3-20110730.0]
```

```
Information for jdocs:
```

```
Comment:  
JUNOS Online Documentation [11.3-20110730.0]
```

```
Information for jkernel:
```

```
Comment:  
JUNOS Kernel Software Suite [11.3-20110730.0]
```

```
Information for jpfe:
```

```
Comment:  
JUNOS Packet Forwarding Engine Support (QFX) [11.3-20110730.0]
```

```
Information for jroute:
```

```
Comment:  
JUNOS Routing Software Suite [11.3-20110730.0]
```

```
Information for jswitch:
```



Comment:

JUNOS Enterprise Software Suite [11.3-20110730.0]

Information for junos:

Comment:

JUNOS Base OS boot [11.3-20110730.0]

Information for jweb:

Comment:

JUNOS Web Management [11.3-20110730.0]



## show system statistics

<b>Syntax</b>	show system statistics
<b>Syntax (EX Series Switches)</b>	show system statistics <all-members> <local> <member <i>member-id</i> >
<b>Syntax (TX Matrix Router)</b>	show system statistics <all-chassis   all-lcc   lcc <i>number</i>   scc>
<b>Syntax (TX Matrix Plus Router)</b>	show system statistics <all-chassis   all-lcc   lcc <i>number</i>   sfc <i>number</i> >
<b>Syntax (MX Series Router)</b>	show system statistics <all-members> <local> <member <i>member-id</i> >
<b>Syntax (QFX Series)</b>	show system statistics
<b>Release Information</b>	Command introduced before JUNOS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>sfc</b> option introduced for the TX Matrix Plus router in JUNOS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display system-wide protocol-related statistics.
<b>Options</b>	<b>none</b> —Display system statistics for all the following protocols: <ul style="list-style-type: none"> <li>• <b>arp</b>—Address Resolution Protocol</li> <li>• <b>bridge</b>—IEEE 802.1 Bridging</li> <li>• <b>clns</b>—Connectionless Network Service</li> <li>• <b>esis</b>—End System-to-Intermediate System</li> <li>• <b>ethoamcfm</b>—Ethernet OAM protocol for connectivity fault management</li> <li>• <b>ethoamlfm</b>—Ethernet OAM protocol for link fault management</li> <li>• <b>icmp</b>—Internet Control Message Protocol</li> <li>• <b>icmp6</b>—Internet Control Message Protocol version 6</li> <li>• <b>igmp</b>—Internet Group Management Protocol</li> <li>• <b>ip</b>—Internet Protocol version 4</li> <li>• <b>ip6</b>—Internet Protocol version 6</li> <li>• <b>mpls</b>—Multiprotocol Label Switching</li> <li>• <b>rdp</b>—Reliable Datagram Protocol</li> </ul>



- **tcp**—Transmission Control Protocol
- **tnp**—Trivial Network Protocol
- **ttp**—TNP Tunneling Protocol
- **tudp**—Trivial User Datagram Protocol
- **udp**—User Datagram Protocol
- **vpls**—Virtual Private LAN Service

**all-chassis**—(TX Matrix and TX Matrix Plus routers only) (Optional) Display system statistics for a protocol for all the routers in the chassis.

**all-lcc**—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display system statistics for a protocol for all T640 routers (or line-card chassis) connected to the TX Matrix router. On a TX Matrix Plus router, display system statistics for a protocol for all T1600 routers (or line-card chassis) connected to the TX Matrix Plus router

**all-members**—(EX4200 switches and MX Series routers only) (Optional) Display system statistics for a protocol for all members of the Virtual Chassis configuration.

**lcc number**—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display system statistics for a protocol for a specific T640 router that is connected to the TX Matrix router. On a TX Matrix Plus router, display system statistics for a protocol for a specific T1600 router that is connected to the TX Matrix Plus router. Replace **number** with a value from 0 through 3.

**local**—(EX4200 switches and MX Series routers only) (Optional) Display system statistics for a protocol for the local Virtual Chassis member.

**member member-id**—(EX4200 switches and MX Series routers only) (Optional) Display system statistics for a protocol for the specified member of the Virtual Chassis configuration. For EX4200 switches, replace **member-id** with a value from 0 through 9. For an MX Series Virtual Chassis, replace **member-id** with a value of 0 or 1.

**scc**—(TX Matrix routers only) (Optional) Display system statistics for a protocol for the TX Matrix router (or switch-card chassis).

**sfc number**—(TX Matrix Plus routers only) (Optional) Display system statistics for a protocol for the TX Matrix Plus router (or switch-fabric chassis). Replace **number** with 0.

**Additional Information** By default, when you issue the **show system statistics** command on a TX Matrix or TX Matrix Plus master Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on the TX Matrix router) or T1600 (in a routing matrix based on the TX Matrix Plus router) master Routing Engines connected to it. Likewise, if you issue the same command on the TX Matrix or TX Matrix Plus backup Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on the TX Matrix router) or T1600 (in a routing matrix based on the TX Matrix Plus router) backup Routing Engines that are connected to it.



**Required Privilege Level**    view

**List of Sample Output**    [show system statistics on page 978](#)  
                                  [show system statistics \(EX Series Switches\) on page 985](#)  
                                  [show system statistics \(TX Matrix Router\) on page 994](#)  
                                  [show system statistics \(QFX Series\) on page 1000](#)



## Sample Output

```
show system statistics user@host> show system statistics
ip:
    3682087 total packets received
    0 bad header checksums
    0 with size smaller than minimum
    0 with data size < data length
    0 with header length < data size
    0 with data length < header length
    0 with incorrect version number
    0 packets destined to dead next hop
    0 fragments received
    0 fragments dropped (dup or out of space)
    0 fragments dropped (queue overflow)
    0 fragments dropped after timeout
    0 fragments dropped due to over limit
    0 packets reassembled ok
    3664774 packets for this host
    17316 packets for unknown/unsupported protocol
    0 packets forwarded
    0 packets not forwardable
    0 redirects sent
    6528 packets sent from this host
    0 packets sent with fabricated ip header
    0 output packets dropped due to no bufs
    0 output packets discarded due to no route
    0 output datagrams fragmented
    0 fragments created
    0 datagrams that can't be fragmented
    0 packets with bad options
    1123 packets with options handled without error
    0 strict source and record route options
    0 loose source and record route options
    0 record route options
    0 timestamp options
    0 timestamp and address options
    0 timestamp and prespecified address options
    0 option packets dropped due to rate limit
    1123 router alert options
    0 multicast packets dropped (no iflist)
    0 packets dropped (src and int don't match)
icmp:
    0 drops due to rate limit
    0 calls to icmp_error
    0 errors not generated because old message was icmp
Output histogram:
    echo reply: 75
    0 messages with bad code fields
    0 messages less than the minimum length
    0 messages with bad checksum
    0 messages with bad source address
    0 messages with bad length
    0 echo drops with broadcast or multicast destination address
    0 timestamp drops with broadcast or multicast destination address
Input histogram:
    echo: 75
    router advertisement: 130
    75 message responses generated
tcp:
```



```

3844 packets sent
    3618 data packets (1055596 bytes)
    0 data packets (0 bytes) retransmitted
    0 resends initiated by MTU discovery
    205 ack-only packets (148 packets delayed)
    0 URG only packets
    0 window probe packets
    0 window update packets
    1079 control packets
5815 packets received
    3377 acks (for 1055657 bytes)
    24 duplicate acks
    0 acks for unsent data
    2655 packets (15004 bytes) received in-sequence
    1 completely duplicate packet (0 bytes)
    0 old duplicate packets
    0 packets with some dup. data (0 bytes duped)
    0 out-of-order packets (0 bytes)
    0 packets (0 bytes) of data after window
    0 window probes
    7 window update packets
    0 packets received after close
    0 discarded for bad checksums
    0 discarded for bad header offset fields
    0 discarded because packet too short
1 connection request
32 connection accepts
0 bad connection attempts
0 listen queue overflows
33 connections established (including accepts)
30 connections closed (including 0 drops)
    27 connections updated cached RTT on close
    27 connections updated cached RTT variance on close
    0 connections updated cached ssthresh on close
0 embryonic connections dropped
3374 segments updated rtt (of 3220 attempts)
0 retransmit timeouts
    0 connections dropped by rexmit timeout
0 persist timeouts
    0 connections dropped by persist timeout
344 keepalive timeouts
    0 keepalive probes sent
    0 connections dropped by keepalive
1096 correct ACK header predictions
1314 correct data packet header predictions
32 syncache entries added
    0 retransmitted
    0 dupsyn
    0 dropped
    32 completed
    0 bucket overflow
    0 cache overflow
    0 reset
    0 stale
    0 aborted
    0 badack
    0 unreach
    0 zone failures
0 cookies sent
0 cookies received
0 ACKs sent in response to in-window but not exact RSTs

```



```
0 ACKs sent in response to in-window SYNs on established connections
0 rcv packets dropped by TCP due to bad address
0 out-of-sequence segment drops due to insufficient memory
1058 RST packets
0 ICMP packets ignored by TCP
0 send packets dropped by TCP due to auth errors
0 rcv packets dropped by TCP due to auth errors

udp:
3658884 datagrams received
0 with incomplete header
0 with bad data length field
0 with bad checksum
3657342 dropped due to no socket
3657342 broadcast/multicast datagrams dropped due to no socket
0 dropped due to full socket buffers
0 not for hashed pcb
4291311496 delivered
1551 datagrams output

ipsec:
0 inbound packets processed successfully
0 inbound packets violated process security policy
0 inbound packets with no SA available
0 invalid inbound packets
0 inbound packets failed due to insufficient memory
0 inbound packets failed getting SPI
0 inbound packets failed on AH replay check
0 inbound packets failed on ESP replay check
0 inbound AH packets considered authentic
0 inbound AH packets failed on authentication
0 inbound ESP packets considered authentic
0 inbound ESP packets failed on authentication
0 outbound packets processed successfully
0 outbound packets violated process security policy
0 outbound packets with no SA available
0 invalid outbound packets
0 outbound packets failed due to insufficient memory
0 outbound packets with no route

igmp:
17186 messages received
0 messages received with too few bytes
0 messages received with bad checksum
0 membership queries received
0 membership queries received with invalid field(s)
0 membership reports received
0 membership reports received with invalid field(s)
0 membership reports received for groups to which we belong
0 membership reports sent

arp:
44181302 datagrams received
2 ARP requests received
2028 ARP replies received
3156 resolution requests received
0 unrestricted proxy requests
0 received proxy requests
0 proxy requests not proxied
0 with bogus interface
787 with incorrect length
712 for non-IP protocol
0 with unsupported op code
0 with bad protocol address length
0 with bad hardware address length
```



```

0 with multicast source address
7611 with multicast target address
0 with my own hardware address
14241699 for an address not on the interface
0 with a broadcast source address
0 with source address duplicate to mine
29929250 which were not for me
0 packets discarded waiting for resolution
6 packets sent after waiting for resolution
17812 ARP requests sent
2 ARP replies sent
0 requests for memory denied
0 requests dropped on entry
0 requests dropped during retry
ip6:
0 total packets received
0 with size smaller than minimum
0 with data size < data length
0 with bad options
0 with incorrect version number
0 fragments received
0 fragments dropped (dup or out of space)
0 fragments dropped after timeout
0 fragments that exceeded limit
0 packets reassembled ok
0 packets for this host
0 packets forwarded
0 packets not forwardable
0 redirects sent
0 packets sent from this host
0 packets sent with fabricated ip header
0 output packets dropped due to no bufs, etc.
0 output packets discarded due to no route
0 output datagrams fragmented
0 fragments created
0 datagrams that can't be fragmented
0 packets that violated scope rules
0 multicast packets which we don't join
Mbuf statistics:
0 packets whose headers are not continuous
0 tunneling packets that can't find gif
0 packets discarded due to too many headers
0 failures of source address selection
0 forward cache hit
0 forward cache miss
0 packets destined to dead next hop
0 option packets dropped due to rate limit
0 packets dropped (src and int don't match)
0 packets dropped due to bad protocol
icmp6:
0 calls to icmp_error
0 errors not generated because old message was icmp error or so
0 errors not generated because rate limitation
0 messages with bad code fields
0 messages < minimum length
0 bad checksums
0 messages with bad length
Histogram of error messages to be generated:
    0 no route
    0 administratively prohibited
    0 beyond scope

```



```
0 address unreachable
0 port unreachable
0 packet too big
0 time exceed transit
0 time exceed reassembly
0 erroneous header field
0 unrecognized next header
0 unrecognized option
0 redirect
0 unknown
0 message responses generated
0 messages with too many ND options
ipsec6:
0 inbound packets processed successfully
0 inbound packets violated process security policy
0 inbound packets with no SA available
0 invalid inbound packets
0 inbound packets failed due to insufficient memory
0 inbound packets failed getting SPI
0 inbound packets failed on AH replay check
0 inbound packets failed on ESP replay check
0 inbound AH packets considered authentic
0 inbound AH packets failed on authentication
0 inbound ESP packets considered authentic
0 inbound ESP packets failed on authentication
0 outbound packets processed successfully
0 outbound packets violated process security policy
0 outbound packets with no SA available
0 invalid outbound packets
0 outbound packets failed due to insufficient memory
0 outbound packets with no route
c1nl:
0 total packets received
0 packets delivered
0 too small
0 bad header length
0 bad checksum
0 bad version
0 unknown or unsupported protocol
0 bogus sdl size
0 no free memory in socket buffer
0 send packets discarded
0 sbappend failure
0 mcopy failure
0 address fields were not reasonable
0 segment information forgotten
0 forwarded packets
0 total packets sent
0 output packets discarded
0 non-forwarded packets
0 packets fragmented
0 fragments sent
0 fragments discarded
0 fragments timed out
0 fragmentation prohibited
0 packets reconstructed
0 packets destined to dead nexthop
0 packets discarded due to no route
0 Error pdu rate drops
0 ER pdu generation failure
esis:
```



```

0 total pkts received
0 total packets consumed by protocol
0 pdus received with bad checksum
0 pdus received with bad version number
0 pdus received with bad type field
0 short pdus received
0 bogus sdl size
0 bad header length
0 unknown or unsupported protocol
0 no free memory in socket buffer
0 send packets discarded
0 sbappend failure
0 mcopy failure
0 ISO family not configured
tnp:
146776365 unicast packets received
0 broadcast packets received
0 fragmented packets received
0 hello packets dropped
0 fragments dropped
0 fragment reassembly queue flushes
0 hello packets received
0 control packets received
49681642 rdp packets received
337175 udp packets received
96757548 tunnel packets received
0 input packets discarded with no protocol
98397591 unicast packets sent
0 broadcast packets sent
0 fragmented packets sent
0 hello packets dropped
0 fragments dropped
0 hello packets sent
0 control packets sent
49681642 rdp packets sent
337175 udp packets sent
48378774 tunnel packets sent
0 packets sent with unknown protocol
rdp:
49681642 input packets
0 discards for bad checksum
0 discards bad sequence number
0 refused connections
2031964 acks received
0 dropped due to full socket buffers
49692 retransmits
49681642 output packets
24815968 acks sent
28 connects
0 closes
22783990 keepalives received
22783990 keepalives sent
tudp:
337175 datagrams received
0 with incomplete header
0 with bad data length field
0 with bad checksum
0 dropped due to no socket
0 broadcast/multicast datagrams dropped due to no socket
0 dropped due to full socket buffers
337175 delivered

```



```
337175 datagrams output
ttp:
398749 packets sent
0 packets sent while unconnected
0 packets sent while interface down
0 packets sent couldn't get buffer
0 packets sent couldn't find neighbor
44696687 L2 packets received
0 unknown L3 packets received
3682087 IPv4 L3 packets received
0 MPLS L3 packets received
0 MPLS->IPv4 L3 packets received
0 IPv4->MPLS L3 packets received
0 IPv6 L3 packets received
0 ARP L3 packets received
0 CLNP L3 packets received
0 TNP L3 packets received
0 NULL L3 packets received
0 cyclotron cycle L3 packets received
0 cyclotron send L3 packets received
0 packets received while unconnected
0 packets received from unknown ifl
0 input packets couldn't get buffer
0 input packets with bad type
0 input packets with discard type
0 Input packets with too many tlvs
0 Input packets with bad tlv header
70633 Input packets with bad tlv type
68877 Input packets dropped based on tlv result
0 input packets for which rt lookup is bypassed
mpls:
0 total mpls packets received
0 packets forwarded
0 packets dropped
0 with header too small
0 after tagging, can't fit link MTU
0 with IPv4 explicit NULL tag
0 with IPv4 explicit NULL cksum errors
0 with router alert tag
0 lsp ping packets (ttl-expired/router alert)
0 with ttl expired
0 with tag encoding error
0 packets discarded, no route
vpls:
0 total packets received
0 with size smaller than minimum
0 with incorrect version number
0 packets for this host
0 packets with no logical interface
0 packets with no family
0 packets with no route table
0 packets with no auxiliary table
0 packets with no corefacing entry
0 packets with no CE-facing entry
0 mac route learning requests
0 mac routes learnt
0 requests to learn an existing route
0 learning requests while learning disabled on interface
0 learning requests over capacity
0 mac routes moved
0 requests to move static route
```



```

0 mac route aging requests
0 mac routes aged
0 bogus address in aging requests
0 requests to age static route
0 requests to re-ageout aged route
0 requests involving multiple peer FEs
0 aging acks from PFE
0 aging non-acks from PFE
0 aging requests timed out waiting on FEs
0 aging requests over max-rate
0 errors finding peer FEs

```

#### show system statistics (EX Series Switches)

```

user@host> show system statistics
Tcp:

```

```

571779 packets sent
    21517 data packets (1797102 bytes)
    2 data packets retransmitted (20 bytes)
    0 resends initiated by MTU discovery
    3708 ack only packets (531 packets delayed)
    0 URG only packets
    1 window probe packets
    1 window update packets
    1093063 control packets
1132541 packets received
    20961 acks(for 1796102 bytes)
    5861 duplicate acks
    0 acks for unsent data
    19556 packets received in-sequence(232079 bytes)
    3018 completely duplicate packets(0 bytes)
    0 old duplicate packets
    4 packets with some duplicate data(4 bytes duped)
    2 out-of-order packets(2 bytes)
    0 packets of data after window(0 bytes)
    0 window probes
    39 window update packets
    0 packets received after close
    0 discarded for bad checksums
    0 discarded for bad header offset fields
    0 discarded because packet too short
546519 connection requests
78 connection accepts
0 bad connection attempts
0 listen queue overflows
100 connections established (including accepts)
546596 connections closed (including 6 drops)
    47 connections updated cached RTT on close
    47 connections updated cached RTT variance on close
    0 connections updated cached ssthresh on close
546497 embryonic connections dropped
20453 segments updated rtt(of 566914 attempts)
2 retransmit timeouts
    0 connections dropped by retransmit timeout
0 persist timeouts
    0 connections dropped by persist timeout
3028 keepalive timeouts
    3027 keepalive probes sent
    1 connections dropped by keepalive
7515 correct ACK header predictions
12258 correct data packet header predictions
78 syncache entries added
    0 retransmitted

```



```
0 dupsyn
4 dropped
78 completed
0 bucket overflow
0 cache overflow
0 reset
0 stale
0 aborted
0 badack
0 unreach
0 zone failures
0 cookies sent
0 cookies received
1 SACK recovery episodes
1 segment retransmits in SACK recovery episodes
1 byte retransmits in SACK recovery episodes
71 SACK options (SACK blocks) received
1 SACK options (SACK blocks) sent
0 SACK scoreboard overflow
0 ACKs sent in response to in-window but not exact RSTs
0 ACKs sent in response to in-window SYNs on established connections
0 rcv packets dropped by TCP due to bad address
0 out-of-sequence segment drops due to insufficient memory
546544 RST packets
0 ICMP packets ignored by TCP
0 send packets dropped by TCP due to auth errors
0 rcv packets dropped by TCP due to auth errors
0 outgoing segments dropped due to policing

udp:
147 datagrams received
0 with incomplete header
0 with bad data length field
0 with bad checksum
9 dropped due to no socket
0 broadcast/multicast datagrams dropped due to no socket
0 dropped due to full socket buffers
0 not for hashed pcb
138 delivered
0 datagrams output

ip:
73704 total packets received
0 bad header checksums
0 with size smaller than minimum
0 with data size < data length
0 with header length < data size
0 with data length < header length
0 with incorrect version number
0 packets destined to dead next hop
0 fragments received
0 fragments dropped (dup or out of space)
0 fragments dropped (queue overflow)
0 fragments dropped after timeout
0 fragments dropped due to over limit
0 packets reassembled ok
1133057 packets for this host
0 packets for unknown/unsupported protocol
40146 packets forwarded
0 packets not forwardable
40146 redirects sent
1121700 packets sent from this host
0 packets sent with fabricated ip header
```



```

0 output packets dropped due to no bufs
0 output packets discarded due to no route
0 output datagrams fragmented
0 fragments created
0 datagrams that can't be fragmented
0 packets with bad options
0 packets with options handled without error
0 strict source and record route options
0 loose source and record route options
0 record route options
0 timestamp options
0 timestamp and address options
0 timestamp and prespecified address options
0 option packets dropped due to rate limit
0 router alert options
0 multicast packets dropped (no iflist)
0 packets dropped (src and int don't match)
0 transit re packets dropped on mgmt i/f
0 packets used first nexthop in ecmp unilist
0 incoming ttpoip packets received
0 incoming ttpoip packets dropped
0 outgoing TTPoIP packets sent
0 outgoing TTPoIP packets dropped

icmp:
0 drops due to rate limit
9 calls to icmp_error
0 errors not generated because old message was icmp
Output histogram:
    295 echo reply
    9 destination unreachable
0 messages with bad code fields
0 messages less than the minimum length
0 messages with bad checksum
0 messages with bad source address
0 messages with bad length
0 echo drops with broadcast or multicast destination address
0 timestamp drops with broadcast or multicast destination address
Input histogram:
    295 echo
295 message responses generated

igmp:
0 messages received
0 messages received with too few bytes
0 messages received with bad checksum
0 membership queries received
0 membership queries received with invalid fields
0 membership reports received
0 membership reports received with invalid fields
0 membership reports received for groups to which we belong
0 Membership reports sent

raw_if:
0 RAW packets transmitted
0 PPPOE packets transmitted
0 ISDN packets transmitted
0 DIALER packets transmitted
0 PPP packets transmitted to pppd
0 PPP packets transmitted to jppd
0 IGMPv2 packets transmitted
13 output drops due to tx error
0 MPU packets transmitted
0 PPPOE packets received

```



```
0 ISDN packets received
0 DIALER packets received
0 PPP packets received from pppd
0 MPU packets received
0 PPP packets received from jppd
0 IGMPv2 packets received
0 Input drops due to bogus protocol
0 input drops due to no mbufs available
0 input drops due to no space in socket
0 input drops due to no socket

arp:
186413 datagrams received
88 ARP requests received
88 ARP replies received
0 resolution request received
0 unrestricted proxy requests
0 restricted proxy requests
0 received proxy requests
0 proxy requests not proxied
0 restricted proxy requests not proxied
0 datagrams with bogus interface
0 datagrams with incorrect length
0 datagrams for non-IP protocol
0 datagrams with unsupported op code
0 datagrams with bad protocol address length
0 datagrams with bad hardware address length
0 datagrams with multicast source address
0 datagrams with multicast source address
0 datagrams with my own hardware address
164 datagrams for an address not on the interface
0 datagrams with a broadcast source address
0 datagrams with source address duplicate to mine
186065 datagrams which were not for me
0 packets discarded waiting for resolution
0 packets sent after waiting for resolution
50 ARP requests sent
88 ARP replies sent
0 requests for memory denied
0 requests dropped on entry
0 requests dropped during retry
0 requests dropped due to interface deletion
0 requests on unnumbered interfaces
0 new requests on unnumbered interfaces
0 replies for from unnumbered interfaces
0 requests on unnumbered interface with non-subnetted donor
0 replies from unnumbered interface with non-subnetted donor

ip6:
0 total packets received
0 packets with size smaller than minimum
0 packets with data size < data length
0 packets with bad options
0 packets with incorrect version number
0 fragments received
0 fragments dropped (dup or out of space)
0 fragments dropped after timeout
0 fragments that exceeded limit
0 packets reassembled ok
0 packets for this host
0 packets forwarded
0 packets not forwardable
0 redirects sent
```



```

0 packets sent from this host
0 packets sent with fabricated ip header
0 output packets dropped due to no bufs, etc.
0 output datagrams fragmented
0 fragments created
0 datagrams that can't be fragmented
0 packets that violated scope rules
0 multicast packets which we don't join
0 packets whose headers are not continuous
0 tunneling packets that can't find gif
0 packets discarded due to too many headers
0 failures of source address selection
0 forward cache hit
0 forward cache miss
0 Packets destined to dead next hop
0 option packets dropped due to rate limit
0 Packets dropped (src and int don't match)
0 packets dropped due to bad protocol
0 transit re packet(null) dropped on mgmt i/f

icmp6:
0 Calls to icmp_error
0 Errors not generated because old message was icmp error
0 Errors not generated because rate limitation
0 Messages with bad code fields
0 Messages < minimum length
0 Bad checksums
0 Messages with bad length
    0 No route
    0 Administratively prohibited
    0 Beyond scope
    0 Address unreachable
    0 Port unreachable
    0 packet too big
    0 Time exceed transit
    0 Time exceed reassembly
    0 Erroneous header field
    0 Unrecognized next header
    0 Unrecognized option
    0 redirect
    0 Unknown
0 Message responses generated
0 Messages with too many ND options

pfkey:
0 Requests sent from userland
0 Bytes sent from userland
histogram by message type:
    0 reserved
    0 dump
0 Messages with invalid length field
0 Messages with invalid version field
0 Messages with invalid message type field
0 Messages too short
0 Messages with memory allocation failure
0 Messages with duplicate extension
0 Messages with invalid extension type
0 Messages with invalid sa type
0 Messages with invalid address extension
0 Requests sent to userland
0 Bytes sent to userland
histogram by message type:
    0 reserved

```



```

                                0 dump
                                0 Messages toward single socket
                                0 Messages toward all sockets
                                0 Messages toward registered sockets
                                0 Messages with memory allocation failure
c1n1:
                                0 Total packets received
                                0 Packets delivered
                                0 Too small packets
                                0 Packets with bad header length
                                0 Packets with bad checksum
                                0 Bad version packets
                                0 Unknown or unsupported protocol packets
                                0 Packets with bogus sdl size
                                0 No free memory in socket buffer
                                0 Send packets discarded
                                0 Sbappend failure
                                0 Mcopy failure
                                0 Address fields were not reasonable
                                0 Segment information forgotten
                                0 Forwarded packets
                                0 Total packets sent
                                0 Output packets discarded
                                0 Non-forwarded packets
                                0 Packets fragmented
                                0 Fragments sent
                                0 Fragments discarded
                                0 Fragments timed out
                                0 Fragmentation prohibited
                                0 Packets reconstructed
                                0 Packets destined to dead nexthop
                                0 Packets discarded due to no route
                                0 Error pdu rate drops
                                0 ER pdu generation failure
esis:
                                0 Total pkts received
                                0 Total packets consumed by protocol
                                0 Pdus received with bad checksum
                                0 Pdus received with bad version number
                                0 Pdus received with bad type field
                                0 Short pdus received
                                0 Pdus with bogus sdl size
                                0 Pdus with bad header length
                                0 Pdus with unknown or unsupported protocol
                                0 No free memory in socket buffer
                                0 Send packets discarded
                                0 Sbappend failure
                                0 Mcopy failure
                                0 ISO family not configured
tnp:
                                0 Unicast packets received
                                0 Broadcast packets received
                                0 Fragmented packets received
                                0 Hello packets dropped
                                0 Fragments dropped
                                0 Fragment reassembly queue flushes
                                0 Packets with tnp src address collision received
                                0 Hello packets received
                                0 Control packets received
                                0 Rdp packets received
                                0 Udp packets received
```



```

0 Tunnel packets received
0 Input packets discarded with no protocol
0 Packets of version unspecified received
0 Packets of version 1 received
0 Packets of version 2 received
0 Packets of version 3 received
0 Unicast packets sent
0 Broadcast packets sent
0 Fragmented packets sent
0 Hello packets dropped
0 Fragments dropped
0 Hello packets sent
0 Control packets sent
0 Rdp packets sent
0 Udp packets sent
0 Tunnel packets sent
0 Packets sent with unknown protocol
0 Packets of version unspecified sent
0 Packets of version 1 sent
0 Packets of version 2 sent
0 Packets of version 3 sent
rdp:
0 Input packets
0 Packets discarded for bad checksum
0 Packets discarded due to bad sequence number
0 Refused connections
0 Acks received
0 Packets dropped due to full socket buffers
0 Retransmits
0 Output packets
0 Acks sent
0 Connects
0 Closes
0 Keepalives received
0 Keepalives sent
tudp:
67 Datagrams received
0 Datagrams with incomplete header
0 Datagrams with bad data length field
0 Datagrams with bad checksum
0 Datagrams dropped due to no socket
0 Broadcast/multicast datagrams dropped due to no socket
0 Datagrams dropped due to full socket buffers
67 Delivered
68 Datagrams output
ttp:
0 Packets sent
0 Packets sent while unconnected
0 Packets sent while interface down
0 Packets sent couldn't get buffer
0 Packets sent couldn't find neighbor
0 L2 packets received
0 Unknown L3 packets received
0 IPv4 L3 packets received
0 MPLS L3 packets received
0 MPLS->IPv4 L3 packets received
0 IPv4->MPLS L3 packets received
0 IPv6 L3 packets received
0 ARP L3 packets received
0 CLNP L3 packets received
0 TNP L3 packets received

```



```

0 NULL L3 packets received
0 Cyclotron cycle L3 packets received
0 Cyclotron send L3 packets received
0 Packets received while unconnected
0 Packets received from unknown ifl
0 Input packets couldn't get buffer
0 Input packets with bad type
0 Input packets with discard type
0 Input packets with too many tlvs
0 Input packets with bad tlv header
70633 Input packets with bad tlv type
68877 Input packets dropped based on tlv result
0 Input packets for which rt lookup is bypassed

mpls:
0 Total MPLS packets received
0 Packets forwarded
0 Packets dropped
0 Packets with header too small
0 After tagging, packets can't fit link MTU
0 Packets with IPv4 explicit NULL tag
0 Packets with IPv4 explicit NULL cksum errors
0 Packets with router alert tag
0 LSP ping packets (ttl-expired/router alert)
0 Packets with ttl expired
0 Packets with tag encoding error
0 Packets discarded due to no route
0 Packets used first nexthop in ecmp unilist

vpls:
0 Total packets received
0 Packets with size smaller than minimum
0 Packets with incorrect version number
0 Packets for this host
0 Packets with no logical interface
0 Packets with no family
0 Packets with no route table
0 Packets with no auxiliary table
0 Packets with no corefacing entry
0 packets with no CE-facing entry
0 MAC route learning requests
0 MAC routes learnt
0 Requests to learn an existing route
0 Learning requests while learning disabled on interface
0 Learning requests over capacity
0 MAC routes moved
0 Requests to move static route
0 MAC route aging requests
0 MAC routes aged
0 Bogus address in aging requests
0 Requests to age static route
0 Requests to re-ageout aged route
0 Requests involving multiple peer FEs
0 Aging acks from PFE
0 Aging non-acks from PFE
0 Aging requests timed out waiting on FEs
0 Aging requests over max-rate
0 Errors finding peer FEs
0 Unsupported platform
0 Packets dropped due to no l3 route table
0 Packets dropped due to no local ifl
0 Packets punted
0 Packets dropped due to no socket

```



## bridge:

## Input:

- 0 packets received
- 0 packets forwarded
- 0 packets failed to forward
- 0 packets dropped
- 0 packets with vmember lookup failures
- 0 packets with vlan lookup failures
- 0 packets with stp state lookup failures
- 0 packets dropped due to stp blocked/listening
- 0 packets dropped due to stp learning
- 0 packets with src MAC learning failures
- 0 packets with input control processing failures

## Forward:

- 0 packets sent successfully
- 0 packets with send failures
- 0 packets forwarded to l3 interface
- 0 packets with l3 send failures
- 0 packets discarded
- 0 packets with l2ifl store failures
- 0 packets with ifl mismatch failures
- 0 packets with packet duplication failures
- 0 packets with tag lookup failures
- 0 packets with no route for DMAC
- 0 packets with no route table
- 0 packets with no nexthop
- 0 packets with dead nexthop
- 0 packets with eof reached error

## Learning:

- 0 MACs learned
- 0 packets sent to l3 interface
- 0 packets with l3 send failures
- 0 packets hit holdq while learning
- 0 MAC moves
- 0 packets discarded
- 0 packets with no route for SMAC
- 0 packets with no nexthop
- 0 packets with dead nexthop
- 0 packets dropped due to no resolve route
- 0 packets with l3 ifd lookup failures
- 0 packets with l3 ifl lookup failures
- 0 packets with l3 invalid rnh
- 0 packets with no route for SMAC in clone learning
- 0 packets with no nexthop in clone learning
- 0 packets with dead nexthop in clone learning
- 0 packets dropped due to no resolve nh in clone learning

## Output:

- 0 packets forwarded
- 0 packets failed to forward
- 0 packets with vmember lookup failures
- 0 packets with vlan lookup failures
- 0 packets with input control processing failures

## Send:

- 0 packets sent successfully
- 0 packets with send failures
- 0 packets dropped due to interface down
- 0 packets with dev output failures
- 0 blocked ifl discards
- 0 packets with tag lookup failures
- 0 packets with stp state lookup failures
- 0 packets with tag insertion failures



```
0 packets with tag removal failures
Flood:
0 packets flooded
0 flood failures
IGMP:
0 packets sent successfully
0 packets with send failures
0 packets forwarded
0 packets failed to forward
0 packets with mpull failures
0 packets with vmember lookup failures
0 packets with vlan lookup failures
0 packets with ifl lookup failures
0 packets with tag lookup failures
Misc:
0 packets with size smaller than minimum
0 packets with double tags
0 packets with no ifl
0 packets with no family
0 packets with no route table
```

**show system statistics**  
(TX Matrix Router)

```
user@host> show system statistics
sfc0-re0:
```

-----  
Tcp:

```
361694 packets sent
  326507 data packets (103237236 bytes)
  2343 data packets retransmitted (2673324 bytes)
  0 resends initiated by MTU discovery
  33857 ack only packets (31613 packets delayed)
  0 URG only packets
  14 window probe packets
  387 window update packets
  1108 control packets
345879 packets received
  298207 acks(for 103141728 bytes)
  438 duplicate acks
  0 acks for unsent data
  204578 packets received in-sequence(13820995 bytes)
  6 completely duplicate packets(18 bytes)
  0 old duplicate packets
  0 packets with some duplicate data(0 bytes duped)
  0 out-of-order packets(0 bytes)
  0 packets of data after window(0 bytes)
  0 window probes
  899 window update packets
  166 packets received after close
  0 discarded for bad checksums
  0 discarded for bad header offset fields
  0 discarded because packet too short
406 connection requests
233 connection accepts
0 bad connection attempts
0 listen queue overflows
616 connections established (including accepts)
911 connections closed (including 41 drops)
  346 connections updated cached RTT on close
  346 connections updated cached RTT variance on close
  200 connections updated cached ssthresh on close
23 embryonic connections dropped
298155 segments updated rtt(of 287216 attempts)
```



```

1163 retransmit timeouts
    27 connections dropped by retransmit timeout
0 persist timeouts
    0 connections dropped by persist timeout
5 keepalive timeouts
    5 keepalive probes sent
    0 connections dropped by keepalive
69922 correct ACK header predictions
34993 correct data packet header predictions
233 syncache entries added
    0 retransmitted
    0 dupsyn
    0 dropped
    233 completed
    0 bucket overflow
    0 cache overflow
    0 reset
    0 stale
    0 aborted
    0 badack
    0 unreach
    0 zone failures
0 cookies sent
0 cookies received
23 SACK recovery episodes
68 segment retransmits in SACK recovery episodes
71542 byte retransmits in SACK recovery episodes
158 SACK options (SACK blocks) received
0 SACK options (SACK blocks) sent
0 SACK scoreboard overflow
0 ACKs sent in response to in-window but not exact RSTs
0 ACKs sent in response to in-window SYNs on established connections
0 rcv packets dropped by TCP due to bad address
0 out-of-sequence segment drops due to insufficient memory
259 RST packets
0 ICMP packets ignored by TCP
0 send packets dropped by TCP due to auth errors
0 rcv packets dropped by TCP due to auth errors
0 outgoing segments dropped due to policing

```

1cc0-re0:

-----  
 Tcp:

```

346 packets sent
    222 data packets (22894 bytes)
    0 data packets retransmitted (0 bytes)
    0 resends initiated by MTU discovery
    80 ack only packets (12 packets delayed)
    0 URG only packets
    0 window probe packets
    5 window update packets
    42 control packets
358 packets received
    268 acks(for 22939 bytes)
    9 duplicate acks
    0 acks for unsent data
    203 packets received in-sequence(33820 bytes)
    0 completely duplicate packets(0 bytes)
    0 old duplicate packets
    0 packets with some duplicate data(0 bytes duped)
    0 out-of-order packets(0 bytes)

```



```
        0 packets of data after window(0 bytes)
        0 window probes
        6 window update packets
        0 packets received after close
        0 discarded for bad checksums
        0 discarded for bad header offset fields
        0 discarded because packet too short
13 connection requests
18 connection accepts
0 bad connection attempts
0 listen queue overflows
31 connections established (including accepts)
35 connections closed (including 2 drops)
    3 connections updated cached RTT on close
    3 connections updated cached RTT variance on close
    0 connections updated cached ssthresh on close
0 embryonic connections dropped
268 segments updated rtt(of 247 attempts)
0 retransmit timeouts
    0 connections dropped by retransmit timeout
0 persist timeouts
    0 connections dropped by persist timeout
0 keepalive timeouts
    0 keepalive probes sent
    0 connections dropped by keepalive
0 correct ACK header predictions
42 correct data packet header predictions
18 syncache entries added
    0 retransmitted
    0 dupsyn
    0 dropped
    18 completed
    0 bucket overflow
    0 cache overflow
    0 reset
    0 stale
    0 aborted
    0 badack
    0 unreach
    0 zone failures
0 cookies sent
0 cookies received
0 SACK recovery episodes
0 segment retransmits in SACK recovery episodes
0 byte retransmits in SACK recovery episodes
0 SACK options (SACK blocks) received
0 SACK options (SACK blocks) sent
0 SACK scoreboard overflow
0 ACKs sent in response to in-window but not exact RSTs
0 ACKs sent in response to in-window SYNs on established connections
0 rcv packets dropped by TCP due to bad address
0 out-of-sequence segment drops due to insufficient memory
5 RST packets
0 ICMP packets ignored by TCP
0 send packets dropped by TCP due to auth errors
0 rcv packets dropped by TCP due to auth errors
0 outgoing segments dropped due to policing
```

lcc1-re0:

-----  
Tcp:



```

348 packets sent
    223 data packets (22895 bytes)
    0 data packets retransmitted (0 bytes)
    0 resends initiated by MTU discovery
    81 ack only packets (13 packets delayed)
    0 URG only packets
    0 window probe packets
    5 window update packets
    42 control packets
360 packets received
    269 acks(for 22940 bytes)
    9 duplicate acks
    0 acks for unsent data
    203 packets received in-sequence(33820 bytes)
    0 completely duplicate packets(0 bytes)
    0 old duplicate packets
    0 packets with some duplicate data(0 bytes duped)
    0 out-of-order packets(0 bytes)
    0 packets of data after window(0 bytes)
    0 window probes
    6 window update packets
    0 packets received after close
    0 discarded for bad checksums
    0 discarded for bad header offset fields
    0 discarded because packet too short
13 connection requests
18 connection accepts
0 bad connection attempts
0 listen queue overflows
31 connections established (including accepts)
36 connections closed (including 2 drops)
    3 connections updated cached RTT on close
    3 connections updated cached RTT variance on close
    0 connections updated cached ssthresh on close
0 embryonic connections dropped
269 segments updated rtt(of 248 attempts)
0 retransmit timeouts
    0 connections dropped by retransmit timeout
0 persist timeouts
    0 connections dropped by persist timeout
0 keepalive timeouts
    0 keepalive probes sent
    0 connections dropped by keepalive
0 correct ACK header predictions
43 correct data packet header predictions
18 syncache entries added
    0 retransmitted
    0 dupsyn
    0 dropped
    18 completed
    0 bucket overflow
    0 cache overflow
    0 reset
    0 stale
    0 aborted
    0 badack
    0 unreach
    0 zone failures
0 cookies sent
0 cookies received
0 SACK recovery episodes

```



- 0 segment retransmits in SACK recovery episodes
- 0 byte retransmits in SACK recovery episodes
- 0 SACK options (SACK blocks) received
- 0 SACK options (SACK blocks) sent
- 0 SACK scoreboard overflow
- 0 ACKs sent in response to in-window but not exact RSTs
- 0 ACKs sent in response to in-window SYNs on established connections
- 0 rcv packets dropped by TCP due to bad address
- 0 out-of-sequence segment drops due to insufficient memory
- 5 RST packets
- 0 ICMP packets ignored by TCP
- 0 send packets dropped by TCP due to auth errors
- 0 rcv packets dropped by TCP due to auth errors
- 0 outgoing segments dropped due to policing

lcc2-re0:

-----  
Tcp:

- 405 packets sent
  - 271 data packets (23926 bytes)
  - 0 data packets retransmitted (0 bytes)
  - 0 resends initiated by MTU discovery
  - 86 ack only packets (13 packets delayed)
  - 0 URG only packets
  - 0 window probe packets
  - 5 window update packets
  - 46 control packets
- 418 packets received
  - 321 acks(for 23975 bytes)
  - 9 duplicate acks
  - 0 acks for unsent data
  - 234 packets received in-sequence(34403 bytes)
  - 0 completely duplicate packets(0 bytes)
  - 0 old duplicate packets
  - 0 packets with some duplicate data(0 bytes duped)
  - 0 out-of-order packets(0 bytes)
  - 0 packets of data after window(0 bytes)
  - 0 window probes
  - 7 window update packets
  - 0 packets received after close
  - 0 discarded for bad checksums
  - 0 discarded for bad header offset fields
  - 0 discarded because packet too short
- 15 connection requests
- 19 connection accepts
- 0 bad connection attempts
- 0 listen queue overflows
- 34 connections established (including accepts)
- 39 connections closed (including 2 drops)
  - 4 connections updated cached RTT on close
  - 4 connections updated cached RTT variance on close
  - 0 connections updated cached ssthresh on close
- 0 embryonic connections dropped
- 321 segments updated rtt(of 299 attempts)
- 0 retransmit timeouts
  - 0 connections dropped by retransmit timeout
- 0 persist timeouts
  - 0 connections dropped by persist timeout
- 0 keepalive timeouts
  - 0 keepalive probes sent
  - 0 connections dropped by keepalive



```

0 correct ACK header predictions
48 correct data packet header predictions
19 syncache entries added
    0 retransmitted
    0 dupsyn
    0 dropped
    19 completed
    0 bucket overflow
    0 cache overflow
    0 reset
    0 stale
    0 aborted
    0 badack
    0 unreach
    0 zone failures
0 cookies sent
0 cookies received
0 SACK recovery episodes
0 segment retransmits in SACK recovery episodes
0 byte retransmits in SACK recovery episodes
0 SACK options (SACK blocks) received
0 SACK options (SACK blocks) sent
0 SACK scoreboard overflow
0 ACKs sent in response to in-window but not exact RSTs
0 ACKs sent in response to in-window SYNs on established connections
0 rcv packets dropped by TCP due to bad address
0 out-of-sequence segment drops due to insufficient memory
5 RST packets
0 ICMP packets ignored by TCP
0 send packets dropped by TCP due to auth errors
0 rcv packets dropped by TCP due to auth errors
0 outgoing segments dropped due to policing

```

1cc3-re0:

-----  
 Tcp:

```

346 packets sent
    221 data packets (22895 bytes)
    0 data packets retransmitted (0 bytes)
    0 resends initiated by MTU discovery
    81 ack only packets (13 packets delayed)
    0 URG only packets
    0 window probe packets
    5 window update packets
    42 control packets
360 packets received
    267 acks(for 22940 bytes)
    9 duplicate acks
    0 acks for unsent data
    203 packets received in-sequence(33820 bytes)
    0 completely duplicate packets(0 bytes)
    0 old duplicate packets
    0 packets with some duplicate data(0 bytes duped)
    0 out-of-order packets(0 bytes)
    0 packets of data after window(0 bytes)
    0 window probes
    6 window update packets
    0 packets received after close
    0 discarded for bad checksums
    0 discarded for bad header offset fields
    0 discarded because packet too short

```



```
13 connection requests
18 connection accepts
0 bad connection attempts
0 listen queue overflows
31 connections established (including accepts)
35 connections closed (including 2 drops)
    3 connections updated cached RTT on close
    3 connections updated cached RTT variance on close
    0 connections updated cached ssthresh on close
0 embryonic connections dropped
267 segments updated rtt(of 246 attempts)
0 retransmit timeouts
    0 connections dropped by retransmit timeout
0 persist timeouts
    0 connections dropped by persist timeout
0 keepalive timeouts
    0 keepalive probes sent
    0 connections dropped by keepalive
0 correct ACK header predictions
43 correct data packet header predictions
18 syncache entries added
    0 retransmitted
    0 dupsyn
    0 dropped
    18 completed
    0 bucket overflow
    0 cache overflow
    0 reset
    0 stale
    0 aborted
    0 badack
    0 unreach
    0 zone failures
0 cookies sent
0 cookies received
0 SACK recovery episodes
0 segment retransmits in SACK recovery episodes
0 byte retransmits in SACK recovery episodes
0 SACK options (SACK blocks) received
0 SACK options (SACK blocks) sent
0 SACK scoreboard overflow
0 ACKs sent in response to in-window but not exact RSTs
0 ACKs sent in response to in-window SYNs on established connections
0 rcv packets dropped by TCP due to bad address
0 out-of-sequence segment drops due to insufficient memory
5 RST packets
0 ICMP packets ignored by TCP
0 send packets dropped by TCP due to auth errors
0 rcv packets dropped by TCP due to auth errors
0 outgoing segments dropped due to policing
```

#### **show system statistics** (QFX Series)

```
user@switch> show system statistics
Tcp:
571779 packets sent
21517 data packets (1797102 bytes)
2 data packets retransmitted (20 bytes)
0 resends initiated by MTU discovery
3708 ack only packets (531 packets delayed)
0 URG only packets
1 window probe packets
1 window update packets
```



```

1093063 control packets
1132541 packets received
20961 acks(for 1796102 bytes)
5861 duplicate acks
0 acks for unsent data
19556 packets received in-sequence(232079 bytes)
3018 completely duplicate packets(0 bytes)
0 old duplicate packets
4 packets with some duplicate data(4 bytes duped)
2 out-of-order packets(2 bytes)
0 packets of data after window(0 bytes)
0 window probes
39 window update packets
0 packets received after close
0 discarded for bad checksums
0 discarded for bad header offset fields
0 discarded because packet too short
546519 connection requests
78 connection accepts
0 bad connection attempts
0 listen queue overflows
100 connections established (including accepts)
546596 connections closed (including 6 drops)
47 connections updated cached RTT on close
47 connections updated cached RTT variance on close
0 connections updated cached ssthresh on close
546497 embryonic connections dropped
20453 segments updated rtt(of 566914 attempts)
2 retransmit timeouts
0 connections dropped by retransmit timeout
0 persist timeouts
0 connections dropped by persist timeout
3028 keepalive timeouts
3027 keepalive probes sent
1 connections dropped by keepalive
7515 correct ACK header predictions
12258 correct data packet header predictions
78 syncache entries added
0 retransmitted
0 dupsyn
4 dropped
78 completed
0 bucket overflow
0 cache overflow
0 reset
0 stale
0 aborted
0 badack
0 unreach
0 zone failures
0 cookies sent
0 cookies received
1 SACK recovery episodes
1 segment retransmits in SACK recovery episodes
1 byte retransmits in SACK recovery episodes
71 SACK options (SACK blocks) received
1 SACK options (SACK blocks) sent
0 SACK scoreboard overflow
0 ACKs sent in response to in-window but not exact RSTs
0 ACKs sent in response to in-window SYNs on established connections
0 rcv packets dropped by TCP due to bad address

```



```
0 out-of-sequence segment drops due to insufficient memory
546544 RST packets
0 ICMP packets ignored by TCP
0 send packets dropped by TCP due to auth errors
0 rcv packets dropped by TCP due to auth errors
0 outgoing segments dropped due to policing
udp:
147 datagrams received
0 with incomplete header
0 with bad data length field
0 with bad checksum
9 dropped due to no socket
0 broadcast/multicast datagrams dropped due to no socket
0 dropped due to full socket buffers
0 not for hashed pcb
138 delivered
0 datagrams output
ip:
73704 total packets received
0 bad header checksums
0 with size smaller than minimum
0 with data size < data length
0 with header length < data size
0 with data length < header length
0 with incorrect version number
0 packets destined to dead next hop
0 fragments received
0 fragments dropped (dup or out of space)
0 fragments dropped (queue overflow)
0 fragments dropped after timeout
0 fragments dropped due to over limit
0 packets reassembled ok
1133057 packets for this host
0 packets for unknown/unsupported protocol
40146 packets forwarded
0 packets not forwardable
40146 redirects sent
1121700 packets sent from this host
0 packets sent with fabricated ip header
0 output packets dropped due to no bufs
0 output packets discarded due to no route
0 output datagrams fragmented
0 fragments created
0 datagrams that can't be fragmented
0 packets with bad options
0 packets with options handled without error
0 strict source and record route options
0 loose source and record route options
0 record route options
0 timestamp options
0 timestamp and address options
0 timestamp and prespecified address options
0 option packets dropped due to rate limit
0 router alert options
0 multicast packets dropped (no iflist)
0 packets dropped (src and int don't match)
0 transit re packets dropped on mgmt i/f
0 packets used first nexthop in ecmp unilist
0 incoming ttpoip packets received
0 incoming ttpoip packets dropped
0 outgoing TTPoIP packets sent
```



```
0 outgoing TTPoIP packets dropped
icmp:
0 drops due to rate limit
9 calls to icmp_error
0 errors not generated because old message was icmp
Output histogram:
295 echo reply
9 destination unreachable
0 messages with bad code fields
0 messages less than the minimum length
0 messages with bad checksum
0 messages with bad source address
0 messages with bad length
0 echo drops with broadcast or multicast destination address
0 timestamp drops with broadcast or multicast destination address
Input histogram:
295 echo
295 message responses generated
igmp:
0 messages received
0 messages received with too few bytes
0 messages received with bad checksum
0 membership queries received
0 membership queries received with invalid fields
0 membership reports received
0 membership reports received with invalid fields
0 membership reports received for groups to which we belong
0 Membership reports sent
raw_if:
0 RAW packets transmitted
0 PPPOE packets transmitted
0 ISDN packets transmitted
0 DIALER packets transmitted
0 PPP packets transmitted to pppd
0 PPP packets transmitted to jppd
0 IGMPv2 packets transmitted
13 output drops due to tx error
0 MPU packets transmitted
0 PPPOE packets received
0 ISDN packets received
0 DIALER packets received
0 PPP packets received from pppd
0 MPU packets received
0 PPP packets received from jppd
0 IGMPv2 packets received
0 Input drops due to bogus protocol
0 input drops due to no mbufs available
0 input drops due to no space in socket
0 input drops due to no socket
arp:
186413 datagrams received
88 ARP requests received
88 ARP replies received
0 resolution request received
0 unrestricted proxy requests
0 restricted proxy requests
0 received proxy requests
0 proxy requests not proxied
0 restricted proxy requests not proxied
0 datagrams with bogus interface
0 datagrams with incorrect length
```



```
0 datagrams for non-IP protocol
0 datagrams with unsupported op code
0 datagrams with bad protocol address length
0 datagrams with bad hardware address length
0 datagrams with multicast source address
0 datagrams with multicast source address
0 datagrams with my own hardware address
164 datagrams for an address not on the interface
0 datagrams with a broadcast source address
0 datagrams with source address duplicate to mine
186065 datagrams which were not for me
0 packets discarded waiting for resolution
0 packets sent after waiting for resolution
50 ARP requests sent
88 ARP replies sent
0 requests for memory denied
0 requests dropped on entry
0 requests dropped during retry
0 requests dropped due to interface deletion
0 requests on unnumbered interfaces
0 new requests on unnumbered interfaces
0 replies for from unnumbered interfaces
0 requests on unnumbered interface with non-subnetted donor
0 replies from unnumbered interface with non-subnetted donor
ip6:
0 total packets received
0 packets with size smaller than minimum
0 packets with data size < data length
0 packets with bad options
0 packets with incorrect version number
0 fragments received
0 fragments dropped (dup or out of space)
0 fragments dropped after timeout
0 fragments that exceeded limit
0 packets reassembled ok
0 packets for this host
0 packets forwarded
0 packets not forwardable
0 redirects sent
0 packets sent from this host
0 packets sent with fabricated ip header
0 output packets dropped due to no bufs, etc.
0 output datagrams fragmented
0 fragments created
0 datagrams that can't be fragmented
0 packets that violated scope rules
0 multicast packets which we don't join
0 packets whose headers are not continuous
0 tunneling packets that can't find gif
0 packets discarded due to too many headers
0 failures of source address selection
0 forward cache hit
0 forward cache miss
0 Packets destined to dead next hop
0 option packets dropped due to rate limit
0 Packets dropped (src and int don't match)
0 packets dropped due to bad protocol
0 transit re packet(null) dropped on mgmt i/f
icmp6:
0 Calls to icmp_error
0 Errors not generated because old message was icmp error
```



```
0 Errors not generated because rate limitation
0 Messages with bad code fields
0 Messages < minimum length
0 Bad checksums
0 Messages with bad length
0 No route
0 Administratively prohibited
0 Beyond scope
0 Address unreachable
0 Port unreachable
0 packet too big
0 Time exceed transit
0 Time exceed reassembly
0 Erroneous header field
0 Unrecognized next header
0 Unrecognized option
0 redirect
0 Unknown
0 Message responses generated
0 Messages with too many ND options
pfkey:
0 Requests sent from userland
0 Bytes sent from userland
histogram by message type:
0 reserved
0 dump
0 Messages with invalid length field
0 Messages with invalid version field
0 Messages with invalid message type field
0 Messages too short
0 Messages with memory allocation failure
0 Messages with duplicate extension
0 Messages with invalid extension type
0 Messages with invalid sa type
0 Messages with invalid address extension
0 Requests sent to userland
0 Bytes sent to userland
histogram by message type:
0 reserved
0 dump
0 Messages toward single socket
0 Messages toward all sockets
0 Messages toward registered sockets
0 Messages with memory allocation failure
c1n1:
0 Total packets received
0 Packets delivered
0 Too small packets
0 Packets with bad header length
0 Packets with bad checksum
0 Bad version packets
0 Unknown or unsupported protocol packets
0 Packets with bogus sdl size
0 No free memory in socket buffer
0 Send packets discarded
0 Sbappend failure
0 Mcopy failure
0 Address fields were not reasonable
0 Segment information forgotten
0 Forwarded packets
0 Total packets sent
```



```
0 Output packets discarded
0 Non-forwarded packets
0 Packets fragmented
0 Fragments sent
0 Fragments discarded
0 Fragments timed out
0 Fragmentation prohibited
0 Packets reconstructed
0 Packets destined to dead nexthop
0 Packets discarded due to no route
0 Error pdu rate drops
0 ER pdu generation failure
esis:
0 Total pkts received
0 Total packets consumed by protocol
0 Pdus received with bad checksum
0 Pdus received with bad version number
0 Pdus received with bad type field
0 Short pdus received
0 Pdus with bogus sdl size
0 Pdus with bad header length
0 Pdus with unknown or unsupported protocol
0 No free memory in socket buffer
0 Send packets discarded
0 Sbappend failure
0 Mcopy failure
0 ISO family not configured
tnp:
0 Unicast packets received
0 Broadcast packets received
0 Fragmented packets received
0 Hello packets dropped
0 Fragments dropped
0 Fragment reassembly queue flushes
0 Packets with tnp src address collision received
0 Hello packets received
0 Control packets received
0 Rdp packets received
0 Udp packets received
0 Tunnel packets received
0 Input packets discarded with no protocol
0 Packets of version unspecified received
0 Packets of version 1 received
0 Packets of version 2 received
0 Packets of version 3 received
0 Unicast packets sent
0 Broadcast packets sent
0 Fragmented packets sent
0 Hello packets dropped
0 Fragments dropped
0 Hello packets sent
0 Control packets sent
0 Rdp packets sent
0 Udp packets sent
0 Tunnel packets sent
0 Packets sent with unknown protocol
0 Packets of version unspecified sent
0 Packets of version 1 sent
0 Packets of version 2 sent
0 Packets of version 3 sent
rdp:
```



```

0 Input packets
0 Packets discarded for bad checksum
0 Packets discarded due to bad sequence number
0 Refused connections
0 Acks received
0 Packets dropped due to full socket buffers
0 Retransmits
0 Output packets
0 Acks sent
0 Connects
0 Closes
0 Keepalives received
0 Keepalives sent
tudp:
67 Datagrams received
0 Datagrams with incomplete header
0 Datagrams with bad data length field
0 Datagrams with bad checksum
0 Datagrams dropped due to no socket
0 Broadcast/multicast datagrams dropped due to no socket
0 Datagrams dropped due to full socket buffers
67 Delivered
68 Datagrams output
ttp:
0 Packets sent
0 Packets sent while unconnected
0 Packets sent while interface down
0 Packets sent couldn't get buffer
0 Packets sent couldn't find neighbor
0 L2 packets received
0 Unknown L3 packets received
0 IPv4 L3 packets received
0 MPLS L3 packets received
0 MPLS->IPv4 L3 packets received
0 IPv4->MPLS L3 packets received
0 IPv6 L3 packets received
0 ARP L3 packets received
0 CLNP L3 packets received
0 TNP L3 packets received
0 NULL L3 packets received
0 Cyclotron cycle L3 packets received
0 Cyclotron send L3 packets received
0 Packets received while unconnected
0 Packets received from unknown ifl
0 Input packets couldn't get buffer
0 Input packets with bad type
0 Input packets with discard type
0 Input packets with too many tlvs
0 Input packets with bad tlv header
70633 Input packets with bad tlv type
68877 Input packets dropped based on tlv result0 Input packets for which rt lookup
  is bypassed
mpls:
0 Total MPLS packets received
0 Packets forwarded
0 Packets dropped
0 Packets with header too small
0 After tagging, packets can't fit link MTU
0 Packets with IPv4 explicit NULL tag
0 Packets with IPv4 explicit NULL cksum errors
0 Packets with router alert tag

```



```
0 LSP ping packets (ttl-expired/router alert)
0 Packets with ttl expired
0 Packets with tag encoding error
0 Packets discarded due to no route
0 Packets used first nexthop in ecmp unilist
vpls:
0 Total packets received
0 Packets with size smaller than minimum
0 Packets with incorrect version number
0 Packets for this host
0 Packets with no logical interface
0 Packets with no family
0 Packets with no route table
582 Copyright © 2010, Juniper Networks, Inc.
0 Packets with no auxiliary table
0 Packets with no corefacing entry
0 packets with no CE-facing entry
0 MAC route learning requests
0 MAC routes learnt
0 Requests to learn an existing route
0 Learning requests while learning disabled on interface
0 Learning requests over capacity
0 MAC routes moved
0 Requests to move static route
0 MAC route aging requests
0 MAC routes aged
0 Bogus address in aging requests
0 Requests to age static route
0 Requests to re-ageout aged route
0 Requests involving multiple peer FEs
0 Aging acks from PFE
0 Aging non-acks from PFE
0 Aging requests timed out waiting on FEs
0 Aging requests over max-rate
0 Errors finding peer FEs
0 Unsupported platform
0 Packets dropped due to no l3 route table
0 Packets dropped due to no local ifl
0 Packets punted
0 Packets dropped due to no socket
bridge:
Input:
0 packets received
0 packets forwarded
0 packets failed to forward
0 packets dropped
0 packets with vmember lookup failures
0 packets with vlan lookup failures
0 packets with stp state lookup failures
0 packets dropped due to stp blocked/listening
0 packets dropped due to stp learning
0 packets with src MAC learning failures
0 packets with input control processing failures
Forward:
0 packets sent successfully
0 packets with send failures
0 packets forwarded to l3 interface
0 packets with l3 send failures
0 packets discarded
0 packets with l2ifl store failures
0 packets with ifl mismatch failures
```



```
0 packets with packet duplication failures
0 packets with tag lookup failures
0 packets with no route for DMAC
0 packets with no route table
0 packets with no nexthop
0 packets with dead nexthop
0 packets with eof reached error
Learning:
0 MACs learned
0 packets sent to l3 interface
0 packets with l3 send failures
0 packets hit holdq while learning
0 MAC moves
0 packets discarded
0 packets with no route for SMAC
0 packets with no nexthop
0 packets with dead nexthop
0 packets dropped due to no resolve route
0 packets with l3 ifd lookup failures
0 packets with l3 ifl lookup failures
0 packets with l3 invalid rnh
0 packets with no route for SMAC in clone learning
0 packets with no nexthop in clone learning
0 packets with dead nexthop in clone learning
0 packets dropped due to no resolve nh in clone learning
Output:
0 packets forwarded
0 packets failed to forward
0 packets with vmember lookup failures
0 packets with vlan lookup failures
0 packets with input control processing failures
Send:
0 packets sent successfully
0 packets with send failures
0 packets dropped due to interface down
0 packets with dev output failures
0 blocked ifl discards
0 packets with tag lookup failures
0 packets with stp state lookup failures
0 packets with tag insertion failures
0 packets with tag removal failures
Flood:
0 packets flooded
0 flood failures
IGMP:
0 packets sent successfully
0 packets with send failures
0 packets forwarded
0 packets failed to forward
0 packets with mpull failures
0 packets with vmember lookup failures
0 packets with vlan lookup failures
0 packets with ifl lookup failures
0 packets with tag lookup failures
Misc:
0 packets with size smaller than minimum
0 packets with double tags
0 packets with no ifl
0 packets with no family
0 packets with no route table
```







## show system storage

<b>Syntax</b>	show system storage <detail>
<b>Syntax (EX Series Switches)</b>	show system storage <detail> <all-members> <local> <member <i>member-id</i> >
<b>Syntax (TX Matrix Router)</b>	show system storage <detail> <all-chassis   all-lcc   lcc <i>number</i>   scc>
<b>Syntax (TX Matrix Plus Router)</b>	show system storage <detail> <all-chassis   all-lcc   lcc <i>number</i>   sfc <i>number</i> >
<b>Syntax (MX Series Router)</b>	show system storage <detail> <all-members> <local> <member <i>member-id</i> >
<b>Syntax (QFX Series)</b>	show system storage <detail> <infrastructure <i>name</i> > <interconnect-device <i>name</i> > <node-group <i>name</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>sfc</b> option introduced for the TX Matrix Plus router in JUNOS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display statistics about the amount of free disk space in the router's or switch's file systems.
<b>Options</b>	<p><b>none</b>—Display standard information about the amount of free disk space in the router's or switch's file systems.</p> <p><b>detail</b>—(Optional) Display detailed output.</p> <p><b>all-chassis</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) Display system storage statistics for all the routers in the chassis.</p> <p><b>all-lcc</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display system storage statistics for all T640 routers (or line-card chassis) connected to the TX Matrix router. On a TX Matrix Plus router, display system storage statistics for all T1600 routers (or line-card chassis) connected to the TX Matrix Plus router.</p>



**all-members**—(EX4200 switches and MX Series routers only) (Optional) Display system storage statistics for all members of the Virtual Chassis configuration.

**infrastructure *name***—(QFabric systems only) (Optional) Display system storage statistics for the fabric control Routing Engines or fabric manager Routing Engines.

**interconnect-device *name***—(QFabric systems only) (Optional) Display system storage statistics for the Interconnect device.

**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display system storage statistics for a specific T640 router that is connected to the TX Matrix router. On a TX Matrix Plus router, display system storage statistics for a specific T1600 router that is connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.

**local**—(EX4200 switches and MX Series routers only) (Optional) Display system storage statistics for the local Virtual Chassis member.

**member *member-id***—(EX4200 switches and MX Series routers only) (Optional) Display system storage statistics for the specified member of the Virtual Chassis configuration. For EX4200 switches, replace ***member-id*** with a value from 0 through 9. For an MX Series Virtual Chassis, replace ***member-id*** with a value of 0 or 1.

**node-group *name***—(QFabric systems only) (Optional) Display system storage statistics for the Node group.

**scc**—(TX Matrix routers only) (Optional) Display system storage statistics for the TX Matrix router (or switch-card chassis).

**sfc *number***—(TX Matrix Plus routers only) (Optional) Display system storage statistics for the TX Matrix Plus router (or switch-fabric chassis). Replace ***number*** with 0.

**Additional Information** By default, when you issue the **show system storage** command on a TX Matrix or TX Matrix Plus master Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) or T1600 (in a routing matrix based on a TX Matrix Plus router) master Routing Engines connected to it. Likewise, if you issue the same command on the TX Matrix or TX Matrix Plus backup Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) or T1600 (in a routing matrix based on a TX Matrix Plus router) backup Routing Engines that are connected to it.

**Required Privilege Level** view

**List of Sample Output** [show system storage on page 1014](#)  
[show system storage \(TX Matrix Plus Router\) on page 1014](#)  
[show system storage \(QFX3500 Switch\) on page 1016](#)

**Output Fields** [Table 76 on page 1013](#) describes the output fields for the **show system storage** command. Output fields are listed in the approximate order in which they appear.



Table 76: show system storage Output Fields

Field Name	Field Description
<b>Filesystem</b>	Name of the filesystem.
<b>Size</b>	Size of the filesystem.
<b>Used</b>	Amount of space used in the filesystem.
<b>Avail</b>	Amount of space available in the filesystem.
<b>Capacity</b>	Percentage of the filesystem space that is being used.
<b>Mounted on</b>	Directory in which the filesystem is mounted.



## Sample Output

## show system storage

```

user@host> show system storage
Filesystem      Size      Used      Avail  Capacity  Mounted on
/dev/ad0s1a      77M       37M       34M     52%      /
devfs            16K       16K        0B     100%    /dev/
/dev/vn0         12M       12M        0B     100%    /packages/mnt/jbase
/dev/vn1         39M       39M        0B     100%
/packages/mnt/jkernel-7.2R1.7
/dev/vn2         12M       12M        0B     100%
/packages/mnt/jpfe-M40-7.2R1.7
/dev/vn3         2.3M      2.3M        0B     100%
/packages/mnt/jdocs-7.2R1.7
/dev/vn4         14M       14M        0B     100%
/packages/mnt/jroute-7.2R1.7
/dev/vn5         4.5M      4.5M        0B     100%
/packages/mnt/jcrypto-7.2R1.7
mfs:172         1.5G      4.0K       1.3G     0%      /tmp
/dev/ad0s1e      12M       20K       11M     0%      /config
procfs          4.0K      4.0K        0B     100%    /proc
/dev/ad1s1f      9.4G      4.9G       3.7G     57%     /var

```

show system storage  
(TX Matrix Plus  
Router)

```

user@host> show system storage
sfc0-re0:
-----
Filesystem      Size      Used      Avail  Capacity  Mounted on
/dev/ad0s1a      3.4G      178M      2.9G     6%      /
devfs            1.0K      1.0K        0B     100%    /dev
devfs            1.0K      1.0K        0B     100%    /dev/
/dev/md0         33M       33M        0B     100%    /packages/mnt/jbase
/dev/md1         216M      216M        0B     100%
/packages/mnt/jkernel-9.6-20090519.0
/dev/md2         66M       66M        0B     100%
/packages/mnt/jpfe-T-9.6-20090519.0
/dev/md3         4.1M      4.1M        0B     100%
/packages/mnt/jdocs-9.6-20090519.0
/dev/md4         57M       57M        0B     100%
/packages/mnt/jroute-9.6-20090519.0
/dev/md5         15M       15M        0B     100%
/packages/mnt/jcrypto-9.6-20090519.0
/dev/md6         34M       34M        0B     100%
/packages/mnt/jpfe-common-9.6-20090519.0
/dev/md7         2.0G     10.0K      1.8G     0%      /tmp
/dev/md8         2.0G      1.0M      1.8G     0%      /mfs
/dev/ad0s1e      383M      82K       352M     0%      /config
procfs          4.0K      4.0K        0B     100%    /proc
/dev/ad1s1f      52G       7.5G       40G     16%     /var

lcc0-re0:
-----
Filesystem      Size      Used      Avail  Capacity  Mounted on
/dev/ad0s1a      3.4G      178M      2.9G     6%      /
devfs            1.0K      1.0K        0B     100%    /dev
devfs            1.0K      1.0K        0B     100%    /dev/
/dev/md0         33M       33M        0B     100%    /packages/mnt/jbase
/dev/md1         216M      216M        0B     100%
/packages/mnt/jkernel-9.6-20090519.0
/dev/md2         66M       66M        0B     100%
/packages/mnt/jpfe-T-9.6-20090519.0

```



/dev/md3	4.1M	4.1M	0B	100%	
/packages/mnt/jdocs-9.6-20090519.0					
/dev/md4	57M	57M	0B	100%	
/packages/mnt/jroute-9.6-20090519.0					
/dev/md5	15M	15M	0B	100%	
/packages/mnt/jcrypto-9.6-20090519.0					
/dev/md6	34M	34M	0B	100%	
/packages/mnt/jpfe-common-9.6-20090519.0					
/dev/md7	2.0G	10.0K	1.8G	0%	/tmp
/dev/md8	2.0G	540K	1.8G	0%	/mfs
/dev/ad0s1e	383M	88K	352M	0%	/config
procfs	4.0K	4.0K	0B	100%	/proc
/dev/ad1s1f	52G	6.3G	41G	13%	/var

lcc1-re0:

Filesystem	Size	Used	Avail	Capacity	Mounted on
/dev/ad0s1a	3.4G	178M	2.9G	6%	/
devfs	1.0K	1.0K	0B	100%	/dev
devfs	1.0K	1.0K	0B	100%	/dev/
/dev/md0	33M	33M	0B	100%	/packages/mnt/jbase
/dev/md1	216M	216M	0B	100%	
/packages/mnt/jkernel-9.6-20090519.0					
/dev/md2	66M	66M	0B	100%	
/packages/mnt/jpfe-T-9.6-20090519.0					
/dev/md3	4.1M	4.1M	0B	100%	
/packages/mnt/jdocs-9.6-20090519.0					
/dev/md4	57M	57M	0B	100%	
/packages/mnt/jroute-9.6-20090519.0					
/dev/md5	15M	15M	0B	100%	
/packages/mnt/jcrypto-9.6-20090519.0					
/dev/md6	34M	34M	0B	100%	
/packages/mnt/jpfe-common-9.6-20090519.0					
/dev/md7	2.0G	10.0K	1.8G	0%	/tmp
/dev/md8	2.0G	540K	1.8G	0%	/mfs
/dev/ad0s1e	383M	88K	352M	0%	/config
procfs	4.0K	4.0K	0B	100%	/proc
/dev/ad1s1f	23G	13G	7.7G	64%	/var

lcc2-re0:

Filesystem	Size	Used	Avail	Capacity	Mounted on
/dev/ad0s1a	3.4G	178M	2.9G	6%	/
devfs	1.0K	1.0K	0B	100%	/dev
devfs	1.0K	1.0K	0B	100%	/dev/
/dev/md0	33M	33M	0B	100%	/packages/mnt/jbase
/dev/md1	216M	216M	0B	100%	
/packages/mnt/jkernel-9.6-20090519.0					
/dev/md2	66M	66M	0B	100%	
/packages/mnt/jpfe-T-9.6-20090519.0					
/dev/md3	4.1M	4.1M	0B	100%	
/packages/mnt/jdocs-9.6-20090519.0					
/dev/md4	57M	57M	0B	100%	
/packages/mnt/jroute-9.6-20090519.0					
/dev/md5	15M	15M	0B	100%	
/packages/mnt/jcrypto-9.6-20090519.0					
/dev/md6	34M	34M	0B	100%	
/packages/mnt/jpfe-common-9.6-20090519.0					
/dev/md7	2.0G	10.0K	1.8G	0%	/tmp
/dev/md8	2.0G	540K	1.8G	0%	/mfs
/dev/ad0s1e	383M	64K	352M	0%	/config



```

procfs                4.0K      4.0K      0B      100% /proc
/dev/ad1s1f           23G      3.7G     17G      18% /var

lcc3-re0:
-----
Filesystem             Size      Used      Avail  Capacity  Mounted on
/dev/ad0s1a            3.4G      178M     2.9G        6% /
devfs                  1.0K      1.0K      0B      100% /dev
devfs                  1.0K      1.0K      0B      100% /dev/
/dev/md0                33M       33M      0B      100% /packages/mnt/jbase
/dev/md1               216M      216M      0B      100%
/packages/mnt/jkernel-9.6-20090519.0
/dev/md2                 66M       66M      0B      100%
/packages/mnt/jpfe-T-9.6-20090519.0
/dev/md3                4.1M      4.1M      0B      100%
/packages/mnt/jdocs-9.6-20090519.0
/dev/md4                 57M       57M      0B      100%
/packages/mnt/jroute-9.6-20090519.0
/dev/md5                 15M       15M      0B      100%
/packages/mnt/jcrypto-9.6-20090519.0
/dev/md6                 34M       34M      0B      100%
/packages/mnt/jpfe-common-9.6-20090519.0
/dev/md7                2.0G     10.0K     1.8G        0% /tmp
/dev/md8                2.0G      540K     1.8G        0% /mfs
/dev/ad0s1e            383M       34K     352M        0% /config
procfs                4.0K      4.0K      0B      100% /proc
/dev/ad1s1f           23G      18G     3.5G      84% /var

```

#### show system storage (QFX3500 Switch)

```

user@switch> show system storage
Filesystem             Size      Used      Avail  Capacity  Mounted on
/dev/da0s2a            343M      192M     123M     61% /
devfs                  1.0K      1.0K      0B      100% /dev
/dev/md0               119M      119M      0B      100% /packages/mnt/jbase
/dev/md1               513M      513M      0B      100%
/packages/mnt/jkernel-qfx-11.1R1.5
/dev/md2                 37M       37M      0B      100%
/packages/mnt/jpfe-qfx-e9xxx-11.1R1.5
/dev/md3                6.0M      6.0M      0B      100%
/packages/mnt/jdocs-qfx-11.1R1.5
/dev/md4               216M      216M      0B      100%
/packages/mnt/jroute-qfx-11.1R1.5
/dev/md5                 59M       59M      0B      100%
/packages/mnt/jcrypto-qfx-11.1R1.5
/dev/md6                 85M       85M      0B      100%
/packages/mnt/jswitch-qfx-11.1R1.5
/dev/md7                63M       8.0K      58M        0% /tmp
/dev/da0s2f            228M       14M     196M        7% /var
/dev/da0s3d            590M       3.0M     540M        1% /var/tmp
/dev/da0s3e            104M      162K      95M        0% /config
procfs                4.0K      4.0K      0B      100% /proc

```



## show system uptime

<b>Syntax</b>	show system uptime
<b>Syntax (EX Series Switches)</b>	show system uptime <all-members> <local> <member <i>member-id</i> >
<b>Syntax (QFX Series)</b>	show system uptime <director-group <i>name</i> > <infrastructure <i>name</i> > <interconnect-device <i>name</i> > <node-group <i>name</i> >
<b>Syntax (TX Matrix Router)</b>	show system uptime <all-chassis   all-lcc   lcc <i>number</i>   scc>
<b>Syntax (TX Matrix Plus Router)</b>	show system uptime <detail> <all-chassis   all-lcc   lcc <i>number</i>   sfc <i>number</i> >
<b>Syntax (MX Series Router)</b>	show system uptime <all-members> <invoke-on> <local> <member <i>member-id</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>sfc</b> option introduced for the TX Matrix Plus router in JUNOS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the current time and information about how long the router or switch, router or switch software, and routing protocols have been running.
<b>Options</b>	<p><b>none</b>—Show time since the system rebooted and processes started.</p> <p><b>all-chassis</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) Show time since the system rebooted and processes started on all the routers in the chassis.</p> <p><b>all-lcc</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, show time since the system rebooted and processes started for all T640 routers (or line-card chassis) connected to the TX Matrix router. On a TX Matrix Plus router, show time since the system rebooted and processes started for all T1600 routers (or line-card chassis) connected to the TX Matrix Plus router.</p> <p><b>all-members</b>—(EX4200 switches and MX Series routers only) (Optional) Show time since the system rebooted and processes started on all members of the Virtual Chassis configuration.</p>



**director-group *name***—(QFabric systems only) (Optional) Show time since the system rebooted and processes started on the Director group.

**infrastructure *name***—(QFabric systems only) (Optional) Show time since the system rebooted and processes started on the fabric control Routing Engine and fabric manager Routing Engine.

**interconnect-device *name***—(QFabric systems only) (Optional) Show time since the system rebooted and processes started on the Interconnect device.

**invoke-on**—(MX Series routers only) (Optional) Display the time since the system rebooted and processes started on the master Routing Engine, backup Routing Engine, or both, on a router with two Routing Engines.

**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, show time since the system rebooted and processes started for a specific T640 router that is connected to the TX Matrix router. On a TX Matrix Plus router, show time since the system rebooted and processes started for a specific T1600 router that is connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.

**local**—(EX4200 switches and MX Series routers only) (Optional) Show time since the system rebooted and processes started on the local Virtual Chassis member.

**member *member-id***—(EX4200 switches and MX Series routers only) (Optional) Show time since the system rebooted and processes started on the specified member of the Virtual Chassis configuration. For EX4200 switches, replace ***member-id*** with a value from 0 through 9. For an MX Series Virtual Chassis, replace ***member-id*** with a value of 0 or 1.

**node-group *name***—(QFabric systems only) (Optional) Show time since the system rebooted and processes started on the Node group.

**scc**—(TX Matrix routers only) (Optional) Show time since the system rebooted and processes started for the TX Matrix router (or switch-card chassis).

**sfc *number***—(TX Matrix Plus routers only) (Optional) Show time since the system rebooted and processes started for the TX Matrix Plus router (or switch-fabric chassis). Replace ***number*** with 0.

**Additional Information** By default, when you issue the **show system uptime** command on a TX Matrix or TX Matrix Plus master Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) or T1600 (in a routing matrix based on a TX Matrix Plus router) master Routing Engines connected to it. Likewise, if you issue the same command on the TX Matrix or TX Matrix Plus backup Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) or T1600 (in a routing matrix based on a TX Matrix Plus router) backup Routing Engines that are connected to it.

**Required Privilege Level** view



- Related Documentation**
- [Monitoring System Process Information on page 277](#)
  - [Monitoring System Properties on page 278](#)
  - 10-Gigabit Ethernet LAN/WAN PIC with XFP (T640 Router)

**List of Sample Output**

[show system uptime on page 1020](#)  
[show system uptime all-lcc \(TX Matrix Router\) on page 1020](#)  
[show system uptime all-lcc \(TX Matrix Plus Router\) on page 1020](#)  
[show system uptime \(QFX Series\) on page 1021](#)

**Output Fields** [Table 77 on page 1019](#) describes the output fields for the **show system uptime** command. Output fields are listed in the approximate order in which they appear.

**Table 77: show system uptime Output Fields**

Field Name	Field Description
<b>Current time</b>	Current system time in UTC.
<b>System booted</b>	Date and time when the Routing Engine on the router or switch was last booted and how long it has been running.
<b>Protocols started</b>	Date and time when the routing protocols were last started and how long they have been running.
<b>Last configured</b>	Date and time when a configuration was last committed. Also shows the name of the user who issued the last <b>commit</b> command.
<b>time and up</b>	Current time, in the local time zone, and how long the router or switch has been operational.
<b>users</b>	Number of users logged in to the router or switch.
<b>load averages</b>	Load averages for the last 1 minute, 5 minutes, and 15 minutes.



## Sample Output

**show system uptime**

```
user@host> show system uptime
Current time:      1998-10-13 19:45:47 UTC
System booted:     1998-10-12 20:51:41 UTC (22:54:06 ago)
Protocols started: 1998-10-13 19:33:45 UTC (00:12:02 ago)
Last configured:   1998-10-13 19:33:45 UTC (00:12:02 ago) by abc
12:45PM up 22:54, 2 users, load averages: 0.07, 0.02, 0.01
```

**show system uptime  
all-lcc (TX Matrix  
Router)**

```
user@host> show system uptime all-lcc
lcc0-re0:
-----
Current time: 2004-09-13 09:55:35 PDT
System booted: 2004-09-13 03:13:55 PDT (06:41:40 ago)
Last configured: 2004-09-13 03:17:48 PDT (06:37:47 ago) by root
9:55AM PDT up 6:42, 1 user, load averages: 0.02, 0.03, 0.00
lcc2-re0:
-----
Current time: 2004-09-13 09:55:35 PDT
System booted: 2004-09-12 03:23:43 PDT (1d 06:31 ago)
Last configured: 2004-09-13 03:05:36 PDT (06:49:59 ago) by root
9:55AM PDT up 1 day, 6:32, 1 user, load averages: 0.02, 0.01, 0.00
```

**show system uptime  
all-lcc (TX Matrix Plus  
Router)**

```
user@host> show system uptime all-lcc
sfc0-re0:
-----
Current time: 2009-05-25 00:24:30 PDT
System booted: 2009-05-24 06:39:33 PDT (17:44:57 ago)
Protocols started: 2009-05-24 06:40:30 PDT (17:44:00 ago)
Last configured: 2009-05-24 06:33:27 PDT (17:51:03 ago) by gregdo
12:24AM up 17:45, 2 users, load averages: 0.07, 0.05, 0.01

lcc0-re0:
-----
Current time: 2009-05-25 00:24:30 PDT
System booted: 2009-05-24 06:39:46 PDT (17:44:44 ago)
error: the routing subsystem is not running
Last configured: 2009-05-24 06:40:47 PDT (17:43:43 ago) by root
12:24AM up 17:45, 0 users, load averages: 0.00, 0.00, 0.00

lcc1-re0:
-----
Current time: 2009-05-25 00:24:30 PDT
System booted: 2009-05-24 06:39:38 PDT (17:44:52 ago)
error: the routing subsystem is not running
Last configured: 2009-05-24 06:40:18 PDT (17:44:12 ago) by root
12:24AM up 17:45, 0 users, load averages: 0.00, 0.00, 0.00

lcc2-re0:
-----
Current time: 2009-05-25 00:24:30 PDT
System booted: 2009-05-24 06:39:48 PDT (17:44:42 ago)
error: the routing subsystem is not running
Last configured: 2009-05-24 06:40:44 PDT (17:43:46 ago) by root
12:24AM up 17:45, 0 users, load averages: 0.00, 0.00, 0.00

lcc3-re0:
-----
```




```
Current time: 2009-05-25 00:24:30 PDT
System booted: 2009-05-24 06:39:44 PDT (17:44:46 ago)
error: the routing subsystem is not running
Last configured: 2009-05-24 06:40:08 PDT (17:44:22 ago) by root
12:24AM up 17:45, 0 users, load averages: 0.00, 0.00, 0.00
```

#### **show system uptime (QFX Series)**

```
user@switch> show system uptime
Current time: 2010-08-27 03:12:30 PDT
System booted: 2010-08-13 17:11:54 PDT (1w6d 10:00 ago)
Protocols started: 2010-08-13 17:13:56 PDT (1w6d 09:58 ago)
Last configured: 2010-08-26 05:54:00 PDT (21:18:30 ago) by regress
3:12AM up 13 days, 10:01, 3 users, load averages: 0.00, 0.00, 0.00
```



## show system users

<b>Syntax</b>	show system users <no-resolve>
<b>Syntax (TX Matrix Router)</b>	show system users <all-chassis   all-lcc   lccnumber   scc> <no-resolve>
<b>Syntax (TX Matrix Plus Router)</b>	show system users <detail> <all-chassis   all-lcc   lcc number   sfc number> <no-resolve>
<b>Syntax (MX Series Router)</b>	show system users <all-members> <local> <member member-id> <no-resolve>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. sfc option introduced for the TX Matrix Plus router in JUNOS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	List information about the users who are currently logged in to the router or switch.
<div>  <p><b>NOTE:</b> The <code>show system users</code> command lists the information about administrative users that are logged in to a router or switch using the CLI, J-Web, or an SSH client. The output does not list information about web users or automated users that are logged in from a remote client application using Junos XML APIs, such as NETCONF.</p> </div>	
<b>Options</b>	<p><b>none</b>—List information about the users who are currently logged in to the router or switch.</p> <p><b>all-chassis</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) Show users currently logged in to all the routers in the chassis.</p> <p><b>all-lcc</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, show users currently logged in to all T640 routers (or line-card chassis) connected to the TX Matrix router. On a TX Matrix Plus router, show users currently logged in to all T1600 routers (or line-card chassis) connected to the TX Matrix Plus router.</p> <p><b>all-members</b>—(MX Series routers only) (Optional) Display users currently logged in to all members of the Virtual Chassis configuration.</p> <p><b>lccnumber</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, show users currently logged in to a specific T640 router that is connected to the TX Matrix router. On a TX Matrix Plus router, show users currently logged in to a specific</p>



T1600 router that is connected to the TX Matrix Plus router. Replace **number** with a value from 0 through 3.

**local**—(MX Series routers only) (Optional) Display users currently logged in to the local Virtual Chassis member.

**member member-id**—(MX Series routers only) (Optional) Display users currently logged in to the specified member of the Virtual Chassis configuration. Replace **member-id** with a value of 0 or 1.

**no-resolve**—(Optional) Do not attempt to resolve IP addresses to hostnames.

**scc**—(TX Matrix routers only) (Optional) Show users currently logged in to the TX Matrix router (or switch-card chassis).

**sfc number**—(TX Matrix Plus routers only) (Optional) Show users currently logged in to the TX Matrix Plus router (or switch-fabric chassis). Replace **number** with 0.

**Additional Information** By default, when you issue the **show system users** command on a TX Matrix or TX Matrix Plus master Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) or T1600 (in a routing matrix based on a TX Matrix Plus router) master Routing Engines connected to it. Likewise, if you issue the same command on the TX Matrix or TX Matrix Plus backup Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) or T1600 (in a routing matrix based on a TX Matrix Plus router) backup Routing Engines that are connected to it.

**Required Privilege Level** view

**List of Sample Output** [show system users on page 1024](#)  
[show system users lcc no-resolve \(TX Matrix and TX Matrix Plus Router\) on page 1024](#)  
[show system users \(TX Matrix Plus Router\) on page 1025](#)  
[show system users \(QFX Series\) on page 1025](#)  
[show system users no-resolve \(QFX Series\) on page 1026](#)

**Output Fields** [Table 78 on page 1023](#) describes the output fields for the **show system users** command. Output fields are listed in the approximate order in which they appear.

**Table 78: show system users Output Fields**

Field Name	Field Description
<b>time and up</b>	Current time, in the local time zone, and how long the router or switch has been operational.
<b>users</b>	Number of users logged in to the router or switch.
<b>load averages</b>	Load averages for the last 1 minute, 5 minutes, and 15 minutes.
<b>USER</b>	Username.
<b>TTY</b>	Terminal through which the user is logged in.



Table 78: show system users Output Fields (*continued*)

Field Name	Field Description
FROM	System from which the user has logged in. A hyphen indicates that the user is logged in through the console.
LOGIN@	Time when the user logged in.
IDLE	How long the user has been idle.
WHAT	Processes that the user is running.

## Sample Output

**show system users**

```
user@host> show system users
 7:30PM up 4 days, 2:26, 2 users, load averages: 0.07, 0.02, 0.01
USER   TTY FROM                LOGIN@  IDLE WHAT
root   d0  -                    Fri05PM 4days -csh (csh)
blue   p0  1eve15.company.net 7:30PM   - cli
```

**show system users lcc  
no-resolve (TX Matrix**

```
user@host> show system users lcc 2 no-resolve
lcc2-re0:
```



## and TX Matrix Plus Router)

```
-----
10:34AM PDT up 1 day, 7:11, 5 users, load averages: 0.03, 0.01, 0.00
USER      TTY      FROM              LOGIN@   IDLE   WHAT
root      d0        -                 3:21AM   7:12   /bin/csh
regress   p0        scc-re0           10:15AM   -      telnet hostA
regress   p1        scc-re0           10:16AM   -      telnet hostA
regress   p2        scc-re0           10:19AM   -      telnet hostA
regress   p3        scc-re0           10:24AM   -      telnet hostA
```

## show system users (TX Matrix Plus Router)

```
user@host> show system users
sfc0-re0:
```

```
-----
1:41AM up 26 mins, 3 users, load averages: 0.08, 0.04, 0.03
USER      TTY      FROM              LOGIN@   IDLE   WHAT
regress   p0        10.209.208.123    1:18AM   21     cli
regress   p1        172.17.29.207     1:37AM   2       cli
regress   p2        172.17.28.19      1:40AM   -       cli
```

```
lcc0-re0:
```

```
-----
1:41AM up 26 mins, 0 users, load averages: 0.00, 0.00, 0.03
```

```
lcc1-re0:
```

```
-----
1:41AM up 26 mins, 0 users, load averages: 0.00, 0.02, 0.03
```

```
lcc2-re0:
```

```
-----
1:41AM up 26 mins, 0 users, load averages: 0.16, 0.06, 0.02
```

```
lcc3-re0:
```

```
-----
1:41AM up 26 mins, 0 users, load averages: 0.12, 0.04, 0.04
```

```
regress@aj> show system users
sfc0-re0:
```

```
-----
1:42AM up 28 mins, 4 users, load averages: 0.02, 0.03, 0.02
USER      TTY      FROM              LOGIN@   IDLE   WHAT
regress   p0        pssraj-t61.jnpr.net 1:18AM   22     cli
regress   p1        eng-shell14.juniper.net 1:37AM   -      cli
regress   p2        bigpink.juniper.net 1:40AM   -      cli
regress   p3        sv-cutty-01.englab.juniper.net 1:42AM   -      -csh (csh)
```

```
lcc0-re0:
```

```
-----
1:42AM up 28 mins, 0 users, load averages: 0.02, 0.01, 0.03
```

```
lcc1-re0:
```

```
-----
1:42AM up 28 mins, 0 users, load averages: 0.07, 0.04, 0.03
```

```
lcc2-re0:
```

```
-----
1:42AM up 27 mins, 0 users, load averages: 0.07, 0.06, 0.02
```

```
lcc3-re0:
```

```
-----
1:42AM up 28 mins, 0 users, load averages: 0.05, 0.04, 0.04
```



**show system users  
(QFX Series)****user@switch> show system users**

USER	TTY	FROM	LOGIN@	IDLE	WHAT
tlewis	p0	172.22.18.117	2:54AM	39	-cli (cli)
tlewis	p1	172.22.18.117	3:01AM	-	-cli (cli)
tcheng	p2	172.22.17.197	3:08AM	11	-cli (cli)

**show system users  
no-resolve (QFX  
Series)****user@switch> show system users no-resolve**

USER	TTY	FROM	LOGIN@	IDLE	WHAT
tlewis	p0	172.22.18.117	2:54AM	39	-cli (cli)
tlewis	p1	172.22.18.117	3:01AM	-	-cli (cli)
tcheng	p2	172.22.17.197	3:08AM	11	-cli (cli)



## show system virtual-memory

<b>Syntax</b>	show system virtual-memory
<b>Syntax (EX Series)</b>	show system virtual-memory <all-members> <local> <member <i>member-id</i> >
<b>Syntax (TX Matrix Router)</b>	show system virtual-memory <all-chassis   all-lcc   lcc <i>number</i>   scc>
<b>Syntax (TX Matrix Plus Router)</b>	show system virtual-memory <all-chassis   all-lcc   lcc <i>number</i>   sfc <i>number</i> >
<b>Syntax (MX Series Router)</b>	show system virtual-memory <all-members> <local> <member <i>member-id</i> >
<b>Syntax (QFX Series)</b>	show system virtual-memory <infrastructure <i>name</i> > <interconnect-device <i>name</i> > <node-group <i>name</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the usage of Junos OS kernel memory listed first by size of allocation and then by type of usage. Use the <b>show system virtual-memory</b> command for troubleshooting with Juniper Networks Customer Support.
<b>Options</b>	<p><b>none</b>—Display kernel dynamic memory usage information.</p> <p><b>all-chassis</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) Display kernel dynamic memory usage information for all chassis.</p> <p><b>all-lcc</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display kernel dynamic memory usage information for all T640 routers (or line-card chassis) connected to the TX Matrix router. On a TX Matrix Plus router, display kernel dynamic memory usage information for all T1600 routers (or line-card chassis) connected to the TX Matrix Plus router.</p> <p><b>all-members</b>—(EX4200 switches and MX Series routers only) (Optional) Display kernel dynamic memory usage information for all members of the Virtual Chassis configuration.</p>



**infrastructure *name***—(QFabric systems only) (Optional) Display kernel dynamic memory usage information for the fabric control Routing Engine and fabric manager Routing Engine.

**interconnect-device *name***—(QFabric systems only) (Optional) Display kernel dynamic memory usage information for the Interconnect device.

**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display kernel dynamic memory usage information for a specific T640 router that is connected to the TX Matrix router. On a TX Matrix Plus router, display kernel dynamic memory usage information for a specific T1600 router that is connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.

**local**—(EX4200 switches and MX Series routers only) (Optional) Display kernel dynamic memory usage information for the local Virtual Chassis member.

**member *member-id***—(EX4200 switches and MX Series routers only) (Optional) Display kernel dynamic memory usage information for the specified member of the Virtual Chassis configuration. For EX4200 switches, replace ***member-id*** with a value from 0 through 9. For an MX Series Virtual Chassis, replace ***member-id*** with a value of 0 or 1.

**node-group *name***—(QFabric systems only) (Optional) Display kernel dynamic memory usage information for the Node group.

**scc**—(TX Matrix routers only) (Optional) Display kernel dynamic memory usage information for the TX Matrix router (or switch-card chassis).

**sfc *number***—(TX Matrix Plus routers only) (Optional) Display kernel dynamic memory usage information for the TX Matrix Plus router (or switch-fabric chassis). Replace ***number*** with 0.

**Additional Information** By default, when you issue the **show system virtual-memory** command on a TX Matrix or TX Matrix Plus master Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) or T1600 (in a routing matrix based on a TX Matrix Plus router) master Routing Engines connected to it. Likewise, if you issue the same command on the TX Matrix or TX Matrix Plus backup Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) or T1600 (in a routing matrix based on a TX Matrix Plus router) backup Routing Engines that are connected to it.



**NOTE:** The **show system virtual-memory** command with the **| display XML** pipe option now displays XML output for the command in the parent tags: **<vmstat-memstat-malloc>**, **<vmstat-memstat-zone>**, **<vmstat-sumstat>**, **<vmstat-intr>**, and **<vmstat-kernel-state>** with each child element as a separate XML tag. In Junos OS Releases 10.1 and earlier, the **| display XML** option for this command does not have an XML API element and the entire output is displayed in a single **<output>** tag element.



<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show system virtual-memory on page 1032</a> <a href="#">show system virtual-memory scc (TX Matrix Router) on page 1036</a> <a href="#">show system virtual-memory sfc (TX Matrix Plus Router) on page 1036</a> <a href="#">show system virtual-memory   display xml on page 1040</a> <a href="#">show system virtual-memory (QFX Series) on page 1062</a>
<b>Output Fields</b>	<a href="#">Table 79 on page 1030</a> lists the output fields for the <b>show system virtual-memory</b> command. Output fields are listed in the approximate order in which they appear.



Table 79: show system virtual-memory Output Fields

Field Name	Field Description
<b>Memory statistics by bucket size</b>	
<b>Size</b>	Memory block size (bytes). The kernel memory allocator appropriates blocks of memory whose size is exactly a power of 2.
<b>In Use</b>	Number of memory blocks of this size that are in use (bytes).
<b>Free</b>	Number of memory blocks of this size that are free (bytes).
<b>Requests</b>	Number of memory allocation requests made.
<b>HighWater</b>	Maximum value the free list can have. Once the system starts reclaiming physical memory, it continues until the free list is increased to this value.
<b>Couldfree</b>	Total number of times that the free elements for a bucket size exceed the high-water mark for that bucket size.
<b>Memory usage type by bucket size</b>	
<b>Size</b>	Memory block size (bytes).
<b>Type(s)</b>	Kernel modules that are using these memory blocks. For a definition of each type, refer to a FreeBSD book.
<b>Memory statistics by type</b>	
<b>Type</b>	Kernel module that is using dynamic memory.
<b>InUse</b>	Number of memory blocks used by this type. The number is rounded up.
<b>MemUse</b>	Amount of memory in use, in kilobytes (KB).
<b>HighUse</b>	Maximum memory ever used by this type.
<b>Limit</b>	Maximum memory that can be allocated to this type.
<b>Requests</b>	Total number of dynamic memory allocation requests this type has made.
<b>Type Limit</b>	Number of times requests were blocked for reaching the maximum limit.
<b>Kern Limit</b>	Number of times requests were blocked for the kernel map.
<b>Size(s)</b>	Memory block sizes this type is using.
<b>Memory Totals</b>	
<b>In Use</b>	Total kernel dynamic memory in use (bytes, rounded up).
<b>Free</b>	Total kernel dynamic memory free (bytes, rounded up).



Table 79: show system virtual-memory Output Fields (*continued*)

Field Name	Field Description
<b>Requests</b>	Total number of memory allocation requests.
<b>ITEM</b>	Kernel module that is using memory.
<b>Size</b>	Memory block size (bytes).
<b>Limit</b>	Maximum memory that can be allocated to this type.
<b>Used</b>	Number of memory blocks used by this type. The number is rounded up.
<b>Free</b>	Number of memory blocks available to this type.
<b>Requests</b>	Total number of memory allocation requests this type has made.
<b>interrupt</b>	Timer events and scheduling interruptions.
<b>total</b>	Total number of interruptions for each type.
<b>rate</b>	Interruption rate.
<b>Total</b>	Total for all interruptions.



## Sample Output

show system  
virtual-memory

user@host> show system virtual-memory

Memory statistics by bucket size

Size	In Use	Free	Requests	HighWater	Couldfree
16	906	118	154876	1280	0
32	455	313	209956	640	0
64	4412	260	75380	320	20
128	3200	32	19361	160	81
256	1510	10	8844	80	4
512	446	2	5085	40	0
1K	18	2	5901	20	0
2K	1128	2	4445	10	1368
4K	185	1	456	5	0
8K	5	1	2653	5	0
16K	181	0	233	5	0
32K	2	0	1848	5	0
64K	20	0	22	5	0
128K	5	0	5	5	0
256K	2	0	2	5	0
512K	1	0	1	5	0

Memory usage type by bucket size

Size	Type(s)
16	uc_devlist, nexusdev, iftable, temp, devbuf, atexit, COS, BPF, DEVFS mount, DEVFS node, vnodes, mount, pcb, soname, proc-args, kld, MD disk, rman, ATA generic, bus, sysctl, ippool, pfestat, ifstate, pfe_ipc, mkey, rtable, ifmaddr, ipfw, rnode
32	atkbddev, dirrem, mkdir, diradd, freefile, freefrag, indirdep, bmsafemap, newblk, temp, devbuf, COS, vnodes, cluster_save buffer, pcb, soname, proc-args, sigio, kld, Gzip trees, taskqueue, SWAP, eventhandler, bus, sysctl, uidinfo, subproc, pgrp, pfestat, itable32, ifstate, pfe_ipc, mkey, rtable, ifmaddr, ipfw, rnode, rtnexthop
64	isadev, iftable, MFS node, allocindir, allocdirect, pagedep, temp, devbuf, lockf, COS, NULLFS hash, DEVFS name, vnodes, cluster_save buffer, vfscache, pcb, soname, proc-args, file, AR driver, AD driver, Gzip trees, rman, eventhandler, bus, sysctl, subproc, pfestat, pic, ifstate, pfe_ipc, mkey, ifaddr, rtable, ipfw
128	ZONE, freeblks, inodedep, temp, devbuf, zombie, COS, DEVFS node, vnodes, mount, vfscache, pcb, soname, proc-args, ttys, dev_t, timecounter, kld, Gzip trees, ISOFS node, bus, uidinfo, cred, session, pic, itable16, ifstate, pfe_ipc, rtable, ifstat, metrics, rtnexthop, iffamily
256	iflogical, iftable, MFS node, FFS node, newblk, temp, devbuf, NFS daemon, vnodes, proc-args, kqueue, file desc, Gzip trees, bus, subproc, itable16, ifstate, pfe_ipc, sysctl, rtnexthop
512	UFS mount, temp, devbuf, mount, BIO buffer, ptys, ttys, AR driver, Gzip trees, ISOFS mount, msg, iocltops, ATA generic, bus, proc, pfestat, lr, ifstate, pfe_ipc, rtable, ipfw, ifstat, rtnexthop
1K	iftable, temp, devbuf, NQNFS Lease, kqueue, kld, AD driver, Gzip trees, sem, MD disk, bus, ifstate, pfe_ipc, ipfw
2K	uc_devlist, UFS mount, temp, devbuf, BIO buffer, pcb, AR driver, Gzip trees, iocltops, bus, ipfw, ifstat, rcache
4K	memdesc, iftable, UFS mount, temp, devbuf, kld, Gzip trees, sem, msg
8K	temp, devbuf, syncache, Gzip trees
16K	indirdep, temp, devbuf, shm, msg
32K	pagedep, kld, Gzip trees
64K	VM pgdata, devbuf, MSDOSFS mount
128K	UFS ihash, inodedep, NFS hash, kld, ISOFS mount
256K	mbuf, vfscache



512K SWAP

Memory statistics by type					Type	Kern	
Type	InUse	MemUse	HighUse	Limit	Requests	Limit	Limit Size(s)
isadev	13	1K	1K127753K	13	0	0	64
atkbddev	2	1K	1K127753K	2	0	0	32
uc_devlist	24	3K	3K127753K	24	0	0	16,2K
nexusdev	3	1K	1K127753K	3	0	0	16
memdesc	1	4K	4K127753K	1	0	0	4K
mbuf	1	152K	152K127753K	1	0	0	256K
iflogical	6	2K	2K127753K	6	0	0	256
iftable	17	9K	9K127753K	18	0	0	16,64,256,1K,4K
ZONE	15	2K	2K127753K	15	0	0	128
VM pgdata	1	64K	64K127753K	1	0	0	64K
UFS mount	12	26K	26K127753K	12	0	0	512,2K,4K
UFS ihash	1	128K	128K127753K	1	0	0	128K
MFS node	6	2K	3K127753K	35	0	0	64,256
FFS node	906	227K	227K127753K	1352	0	0	256
dirrem	0	0K	4K127753K	500	0	0	32
mkdir	0	0K	1K127753K	38	0	0	32
diradd	0	0K	6K127753K	521	0	0	32
freefile	0	0K	4K127753K	374	0	0	32
freeblks	0	0K	8K127753K	219	0	0	128
freefrag	0	0K	1K127753K	193	0	0	32
allocindir	0	0K	25K127753K	1518	0	0	64
indirdep	0	0K	17K127753K	76	0	0	32,16K
allocdirect	0	0K	10K127753K	760	0	0	64
bmsafemap	0	0K	1K127753K	72	0	0	32
newblk	1	1K	1K127753K	2279	0	0	32,256
inodedep	1	128K	175K127753K	2367	0	0	128,128K
pagedep	1	32K	33K127753K	47	0	0	64,32K
temp	1239	92K	96K127753K	8364	0	0	16,32,64K
devbuf	1413	5527K	5527K127753K	1535	0	0	16,32,64,128,256
lockf	38	3K	3K127753K	2906	0	0	64
atexit	1	1K	1K127753K	1	0	0	16
zombie	0	0K	2K127753K	3850	0	0	128
NFS hash	1	128K	128K127753K	1	0	0	128K
NQNFS Lease	1	1K	1K127753K	1	0	0	1K
NFS daemon	1	1K	1K127753K	1	0	0	256
syncache	1	8K	8K127753K	1	0	0	8K
COS	353	44K	44K127753K	353	0	0	16,32,64,128
BPF	189	3K	3K127753K	189	0	0	16
MSDOSFS mount	1	64K	64K127753K	1	0	0	64K
NULLFS hash	1	1K	1K127753K	1	0	0	64
DEVFS mount	2	1K	1K127753K	2	0	0	16
DEVFS name	487	31K	31K127753K	487	0	0	64
DEVFS node	471	58K	58K127753K	479	0	0	16,128
vnodes	28	7K	7K127753K	429	0	0	16,32,64,128,256
mount	15	8K	8K127753K	18	0	0	16,128,512
cluster_save buffer	0	0K	1K127753K	55	0	0	32,64
vfscache	1898	376K	376K127753K	3228	0	0	64,128,256K
BIO buffer	49	98K	398K127753K	495	0	0	512,2K
pcb	159	16K	17K127753K	399	0	0	16,32,64,128,2K
soname	82	10K	10K127753K	42847	0	0	16,32,64,128
proc-args	57	2K	3K127753K	2105	0	0	16,32,64,128,256
ptys	32	16K	16K127753K	32	0	0	512
ttys	254	33K	33K127753K	522	0	0	128,512
kqueue	5	3K	4K127753K	23	0	0	256,1K
sigio	1	1K	1K127753K	27	0	0	32
file	383	24K	24K127753K	16060	0	0	64
file desc	76	19K	20K127753K	3968	0	0	256



shm	1	12K	12K127753K	1	0	0	16K
dev_t	286	36K	36K127753K	286	0	0	128
timecounter	10	2K	2K127753K	10	0	0	128
kld	11	117K	122K127753K	34	0	0	16,32,128,1K,4K
AR driver	1	1K	3K127753K	5	0	0	64,512,2K
AD driver	2	2K	3K127753K	2755	0	0	64,1K
Gzip trees	0	0K	46K127753K	133848	0	0	32,64,128,256
ISOFS node	1136	142K	142K127753K	1189	0	0	128
ISOFS mount	9	132K	132K127753K	10	0	0	512,128K
sem	3	6K	6K127753K	3	0	0	1K,4K
MD disk	2	2K	2K127753K	2	0	0	16,1K
msg	4	25K	25K127753K	4	0	0	512,4K,16K
rman	59	4K	4K127753K	461	0	0	16,64
ioctlops	0	0K	2K127753K	992	0	0	512,2K
taskqueue	2	1K	1K127753K	2	0	0	32
SWAP	2	413K	413K127753K	2	0	0	32,512K
ATA generic	6	3K	3K127753K	6	0	0	16,512
eventhandler	17	1K	1K127753K	17	0	0	32,64
bus	340	30K	31K127753K	794	0	0	16,32,64,128,256
sysctl	0	0K	1K127753K	130262	0	0	16,32,64
uidinfo	4	1K	1K127753K	10	0	0	32,128
cred	22	3K	3K127753K	3450	0	0	128
subproc	156	10K	10K127753K	7882	0	0	32,64,256
proc	2	1K	1K127753K	2	0	0	512
session	12	2K	2K127753K	34	0	0	128
pgrp	16	1K	1K127753K	45	0	0	32
ippool	1	1K	1K127753K	1	0	0	16
pfestat	0	0K	1K127753K	47349	0	0	16,32,64,512
pic	5	1K	1K127753K	5	0	0	64,128
lr	1	1K	1K127753K	1	0	0	512
itable32	110	4K	4K127753K	110	0	0	32
itable16	161	26K	26K127753K	161	0	0	128,256
ifstate	694	159K	160K127753K	1735	0	0	16,32,64,128,1K
pfe_ipc	0	0K	1K127753K	56218	0	0	16,32,64,128,1K
mkey	250	4K	4K127753K	824	0	0	16,32,64
ifaddr	9	1K	1K127753K	9	0	0	64
sysctl	0	0K	1K127753K	30	0	0	256
rtable	49	6K	6K127753K	307	0	0	16,32,64,128,512
ifmaddr	22	1K	1K127753K	22	0	0	16,32
ipfw	23	10K	10K127753K	48	0	0	16,32,64,512,2K
ifstat	698	805K	805K127753K	698	0	0	128,512,2K
rcache	4	8K	8K127753K	4	0	0	2K
rnode	27	1K	1K127753K	285	0	0	16,32
metrics	1	1K	1K127753K	3	0	0	128
rtnexthop	57	9K	9K127753K	312	0	0	32,128,256,512
iffamily	12	2K	2K127753K	12	0	0	128

Memory Totals: In Use      Free      Requests  
9311K                      54K                      489068

ITEM	SIZE	LIMIT	USED	FREE	REQUESTS
PIPE:	192,	0,	4,	81,	4422
SWAPMETA:	160,	95814,	0,	0,	0
unpcb:	160,	0,	114,	36,	279
ripcb:	192,	25330,	5,	37,	5
syncache:	128,	15359,	0,	64,	5
tcpcb:	576,	25330,	23,	12,	32
udpcb:	192,	25330,	14,	28,	255
socket:	256,	25330,	246,	26,	819
KNOTE:	96,	0,	27,	57,	71
NFSNODE:	352,	0,	0,	0,	0



```

NFSMOUNT:      544,      0,      0,      0,      0
VNODE:         224,      0,    2778,    43,    2778
NAMEI:        1024,      0,      0,      8,    40725
VMSPACE:       192,      0,     57,    71,    3906
PROC:         448,      0,     73,    17,    3923
DP fakepg:     64,      0,      0,      0,      0
PV ENTRY:       28,    499566,  44530, 152053, 1525141
MAP ENTRY:      48,      0,    1439,   134,  351075
KMAP ENTRY:     48,    35645,   179,   119,   10904
MAP:          108,      0,      7,      3,      7
VM OBJECT:      92,      0,    2575,   109,   66912

```

```

792644 cpu context switches
9863474 device interrupts
286510 software interrupts
390851 traps
3596829 system calls
    16 kernel threads created
    3880 fork() calls
    27 vfork() calls
    0 rfork() calls
    0 swap pager pageins
    0 swap pager pages paged in
    0 swap pager pageouts
    0 swap pager pages paged out
    380 vnode pager pageins
    395 vnode pager pages paged in
    122 vnode pager pageouts
    1476 vnode pager pages paged out
    0 page daemon wakeups
    0 pages examined by the page daemon
    101 pages reactivated
161722 copy-on-write faults
    0 copy-on-write optimized faults
84623 zero fill pages zeroed
83063 zero fill pages prezeroed
    7 intransit blocking page faults
535606 total VM faults taken
    0 pages affected by kernel thread creation
238254 pages affected by fork()
    2535 pages affected by vfork()
    0 pages affected by rfork()
283379 pages freed
    0 pages freed by daemon
190091 pages freed by exiting processes
17458 pages active
29166 pages inactive
    0 pages in VM cache
10395 pages wired down
134610 pages free
    4096 bytes per page
183419 total name lookups
    cache hits (90% pos + 7% neg) system 0% per-directory
    deletions 0%, falsehits 0%, toolong 0%

```

```

interrupt      total      rate
ata0 irq14      113338        3
mux irq7        727643       21
fxp1 irq10     1178671       34
sio0 irq4         833         0
clk irq0       3439769       99

```



```

rtc irq8          4403221      127
Total            9863475      286

```

```

Kernel direct memory map:
    4423 pages used
   4057340 pages maximum

```

*Note: Kernel direct memory map only displays for 64 bit platform.*

#### show system virtual-memory scc (TX Matrix Router)

```
user@host> show system virtual-memory scc
```

##### Memory statistics by bucket size

Size	In Use	Free	Requests	HighWater	Couldfree
16	898	126	749493	1280	0
32	2018	1310	980643	640	632
64	3490	13342	935420	320	5365

...

##### Memory usage type by bucket size

Size	Type(s)
16	uc_devlist, COS, BPF, DEVFS mount, DEVFS node, vnodes, mount, pcb, soname, rman, bus, sysctl, ifstate, pfe_ipc, mkey, socket, rtable, ifmaddr, ipfw, rnode, iftable, temp, devbuf, atexit, proc-args, kld, MD disk
32	atkbddev, Gzip trees, dirrem, mkdir, diradd, freefile, freefrag, indirdep, bmsafemap, newblk, tseg_qent, COS, vnodes,

...

##### Memory statistics by type

Type	InUse	MemUse	HighUse	Limit	Requests	Type	Kern	Limit	Limit	Size(s)
isadev	12	1K	1K166400K	12	0	0	0	64		
atkbddev	2	1K	1K166400K	2	0	0	0	32		
uc_devlist	24	3K	3K166400K	24	0	0	0	16,2K		

....

```

Memory Totals:  In Use      Free      Requests
                  6091K      1554K      2897122

```

#### show system virtual-memory sfc (TX Matrix Plus Router)

```
user@host> show system virtual-memory sfc 0
sfc0-re0:
```

```

-----
      Type InUse MemUse HighUse Requests  Size(s)
CAM dev queue      1      1K      -         1      64
  entropy    1024      64K      -       1024      64
    linker    487  6272K      -       1163  16,32,64,4096,32768,131072
      USB    127     10K      -        127  16,32,64,128,256,1024,2048
    lockf     46      3K      -      98418      64
    USBdev    10      2K      -         34  16,128,2048,16384
ifstateSLLNode      0      0K      -       1096      16
    devbuf  21243 15683K      -       21810
16,32,64,128,256,512,1024,2048,4096,8192,16384,32768,65536,131072
    temp    1283     151K      -    2483472
16,32,64,128,256,512,2048,4096,8192,16384,32768,65536,131072
    ip6ndp      0      0K      -          4      64
  in6ifmulti      1      1K      -          1      64
  in6grentry      1      1K      -          1      64
    iflogical    20      5K      -         29    2048
    iffamilly    45      6K      -         69  32,1024,2048
    rtnexthop   266     46K      -     608013  32,256,512,1024,2048,4096

```



```

metrics      31      4K      -      54 256
rnode       212      4K      -    607848 16,32
rcache        4      8K      -        4 65536
iflist        0      0K      -        6 16,64
ifdevice     11      8K      -        17 16,32768
ifstat      424    472K      -      427 512,16384,65536
ipfw         42     23K      -      145
16,32,64,128,256,512,1024,16384,32768,65536,131072
ifmaddr     415     11K      -      415 16,32
rtable      329     28K      -    608066 16,32,64,128,1024,16384
sysctl        0      0K      -    887976 16,32,64,4096,16384,32768
ifaddr       64      5K      -        70 32,64,128
mkey        331      6K      -    12528 16,128
pfe_ipc       0      0K      -   7299115
16,32,64,128,256,512,1024,2048,4096,8192,16384,32768,65536,131072
ifstate 1245054 70088K      -   3040437
16,32,64,128,256,512,1024,2048,4096,8192,16384,32768
idxbucket     1      1K      -        1 16
itable16    5069   1250K      -     5103 1024,4096
itable32     157     10K      -      157 64
itable64       2      1K      -        2 128
lr           1      1K      -        4 16384
pic          37      6K      -        37 64,16384
pfestat       0      0K      -     6220 32,64,128,256,131072
gencfg     1486   424K      -     2614 16,32,64,256,512,16384,32768,65536
jsr           2      1K      -        22 16
idl           1      4K      -       165
32,64,128,256,512,1024,2048,8192,16384,32768,65536,131072
rtsmsg        0      0K      -        16 131072
module       250     16K      -       250 64,128
mtx_pool      1      8K      -        1 64,128
DEVFS3       113     13K      -      114 256
DEVFS1       106     24K      -      106 2048
pgrp         15      1K      -     8600 64
session       11      2K      -     2829 512
proc          2      1K      -         2 16384
subproc      296   572K      -    24689 2048,131072
cred          38      5K      -    619244 256
plimit       18      4K      -    21311 2048
uidinfo        3      1K      -        10 32,512
sysctluid    2701    82K      -     2701 16,32,64
sysctltmp     0      0K      -    15572 16,32,64,1024
umtx         171     11K      -      171 64
SWAP          2    277K      -         2 64
bus          779   125K      -     3072 16,32,64,128,32768
bus-sc        67     62K      -     1477
16,32,64,512,1024,2048,8192,16384,65536,131072
devstat       8     17K      -         8 16,131072
eventhandler  46      2K      -         47 32,128
kobj         93    186K      -      111 65536
DEVFS         8      1K      -         9 16,64
rman        106      7K      -      490 16,32,64
sbuf          0      0K      -    28234 16,32,32768,131072
...
lcc0-re0:
-----
Type InUse MemUse HighUse Requests Size(s)
CAM dev queue 1 1K - 1 64
entropy 1024 64K - 1024 64
linker 487 6272K - 1163 16,32,64,4096,32768,131072
USB 127 10K - 127 16,32,64,128,256,1024,2048

```



lockf	23	2K	-	169585	64
USBdev	10	2K	-	34	16,128,2048,16384
devbuf	5128	10760K	-	5310	
16,32,64,128,256,512,1024,2048,4096,8192,16384,32768,65536,131072					
temp	1285	151K	-	10770	
16,32,64,128,256,512,2048,4096,8192,16384,32768,65536,131072					
ip6ndp	0	0K	-	4	64
iflogical	20	5K	-	29	2048
iffamily	45	6K	-	69	32,1024,2048
rtnexthop	189	29K	-	1211988	32,256,512,1024,2048,4096
metrics	11	2K	-	16	256
rnode	135	3K	-	606391	16,32
rcache	4	8K	-	4	65536
iflist	0	0K	-	6	16,64
ifdevice	11	8K	-	17	16,32768
ifstat	412	471K	-	415	512,16384,65536
ipfw	42	23K	-	91	
16,32,64,128,256,512,1024,16384,32768,65536,131072					
ifmaddr	415	11K	-	415	16,32
rtable	225	20K	-	606584	16,32,64,128,1024,16384
sysctl	0	0K	-	2302479	16,32,64
ifaddr	53	4K	-	69	32,64,128
mkey	133	3K	-	8974	16,128
pfe_ipc	0	0K	-	19035108	
16,32,64,128,512,1024,2048,8192,16384,32768,65536,131072					
ifstate	710270	42176K	-	9583703	
16,32,64,128,256,512,1024,2048,8192,16384,32768					
idxbucket	1	1K	-	1	16
itable16	5045	1245K	-	1825178	1024,4096
itable32	157	10K	-	157	64
itable64	2	1K	-	2	128
lr	1	1K	-	4	16384
pic	37	6K	-	37	64,16384
pfestat	0	0K	-	1682	32,64,128,256,131072
gencfg	1486	424K	-	2812	16,32,64,256,512,16384,32768,65536
jsr	0	0K	-	22	16
idl	0	0K	-	4	32768,131072
rtsmg	0	0K	-	3	131072
module	250	16K	-	250	64,128
mtx_pool	1	8K	-	1	64,128
DEVFS3	108	12K	-	109	256
DEVFS1	101	23K	-	101	2048
pgrp	5	1K	-	917	64
session	5	1K	-	917	512
proc	2	1K	-	2	16384
subproc	217	441K	-	4867	2048,131072
cred	21	3K	-	48719	256
plimit	9	2K	-	5255	2048
uidinfo	2	1K	-	2	32,512
sysctlloid	2786	85K	-	2786	16,32,64
sysctltmp	0	0K	-	1833	16,32,64,1024
umtx	126	8K	-	126	64
SWAP	2	277K	-	2	64
bus	780	125K	-	2734	16,32,64,128,32768
bus-sc	69	69K	-	1194	
16,32,64,512,1024,2048,8192,16384,65536,131072					
devstat	8	17K	-	8	16,131072
eventhandler	45	2K	-	46	32,128
kobj	93	186K	-	111	65536
DEVFS	8	1K	-	9	16,64
rman	94	6K	-	477	16,32,64



sbuf	0	OK	-	532	16, 32, 32768, 131072
NULLFS hash	1	1K	-	1	64
taskqueue	5	1K	-	5	64
turnstiles	127	8K	-	127	64
Unitno	6	1K	-	44	16, 64
ioctlops	0	OK	-	1771718	16, 32, 64, 128, 8192, 16384, 65536, 131072
iov	0	OK	-	79425	16, 64, 128, 256, 512, 1024, 2048, 131072
msg	4	25K	-	4	32768, 131072
sem	4	7K	-	4	16384, 32768, 131072
shm	2	13K	-	4	32768
ttys	93	16K	-	195	512, 32768
soname	31	3K	-	389284	16, 32, 64, 256
pcb	101	16K	-	4374	
16, 32, 64, 128, 1024, 2048, 4096, 16384, 65536					
BIO buffer	40	80K	-	750	65536
vfscache	1	512K	-	1	65536
cluster_save buffer	0	OK	-	-	55 32, 64
VFS hash	1	256K	-	1	32, 64
vnodes	1	1K	-	1	512
mount	266	21K	-	481	16, 32, 64, 128, 256, 4096, 32768
vnodemarker	0	OK	-	2497	16384
pfs_nodes	25	3K	-	25	128
pfs_vncache	144	5K	-	386	32
STP	1	1K	-	1	64
GEOM	173	15K	-	1068	
16, 32, 64, 128, 256, 512, 2048, 16384, 32768, 131072					
synccache	1	8K	-	1	
16, 32, 64, 128, 256, 512, 2048, 16384, 32768, 131072					
tlv_stat	0	OK	-	223	
16, 32, 64, 128, 256, 512, 2048, 16384, 32768, 131072					
NFS daemon	1	8K	-	1	
16, 32, 64, 128, 256, 512, 2048, 16384, 32768, 131072					
p1003.1b	1	1K	-	1	16
MD disk	9	18K	-	9	65536
ata_generic	2	2K	-	25	16, 16384, 32768
ISOFS mount	7	1K	-	13	512
ISOFS node	1439	135K	-	1453	128
CAM SIM	1	1K	-	1	64
CAM XPT	6	1K	-	9	16, 64, 16384
CAM periph	1	1K	-	1	128
ad_driver	2	1K	-	2	256
pagedep	1	64K	-	105	64
inodedep	1	256K	-	552	256
newblk	1	1K	-	327	64, 4096
bmsafemap	0	OK	-	19	64
allocdirect	0	OK	-	326	128
freefrag	0	OK	-	31	32
freeblks	0	OK	-	103	2048
freefile	0	OK	-	175	32
diradd	0	OK	-	590	64
mkdir	0	OK	-	166	32
dirrem	0	OK	-	382	32
savedino	0	OK	-	283	512
UFS mount	15	36K	-	15	2048, 65536, 131072
ata_dma	6	1K	-	6	256
UMAHash	1	4K	-	5	4096, 16384, 32768, 65536, 131072
cdev	26	3K	-	26	256
file desc	111	25K	-	5199	16, 1024, 2048, 16384
VM pgdata	2	65K	-	2	64
sigio	1	1K	-	27	32



kenv	30	5K	-	33	16, 32, 64, 131072
atkbddev	2	1K	-	2	32
kqueue	0	0K	-	88	1024, 4096, 32768
proc-args	28	2K	-	3970	32, 64, 128, 256, 512, 1024
isadev	23	2K	-	23	64
zombie	1	1K	-	4651	128
ithread	92	7K	-	92	16, 64, 256
legacydrv	3	1K	-	3	16
memdesc	1	4K	-	1	131072
nexusdev	2	1K	-	2	16
CAM queue	3	1K	-	3	16
KTRACE	100	10K	-	100	128
kbdmux	5	9K	-	5	128, 2048, 65536, 131072
ITEM	SIZE	LIMIT	USED	FREE	REQUESTS
UMA Kgs:	136,	0,	71,	1,	71
...					

### show system virtual-memory | display xml

```

user@host> show system virtual-memory | display xml
<rpc-reply xmlns:junos="http://xml.juniper.net/junos/10.2R1/junos">
  <system-virtual-memory-information>
    <vmstat-memstat-malloc>
      <memstat-name>CAM dev queue</memstat-name>
      <inuse>1</inuse>
      <memuse>1</memuse>
      <high-use>-</high-use>
      <memstat-req>1</memstat-req>
      <memstat-size>64</memstat-size>
      <memstat-name>entropy</memstat-name>
      <inuse>1024</inuse>
      <memuse>64</memuse>
      <high-use>-</high-use>
      <memstat-req>1024</memstat-req>
      <memstat-size>64</memstat-size>
      <memstat-name>linker</memstat-name>
      <inuse>481</inuse>
      <memuse>1871</memuse>
      <high-use>-</high-use>
      <memstat-req>1145</memstat-req>
      <memstat-size>16, 32, 64, 4096, 32768, 131072</memstat-size>
      <memstat-name>lockf</memstat-name>
      <inuse>56</inuse>
      <memuse>4</memuse>
      <high-use>-</high-use>
      <memstat-req>5998</memstat-req>
      <memstat-size>64</memstat-size>
      <memstat-name>devbuf</memstat-name>
      <inuse>2094</inuse>
      <memuse>3877</memuse>
      <high-use>-</high-use>
      <memstat-req>2099</memstat-req>

      <memstat-size>16, 32, 64, 128, 512, 1024, 4096, 8192, 16384, 32768, 65536, 131072</memstat-size>

      <memstat-name>temp</memstat-name>
      <inuse>21</inuse>
      <memuse>66</memuse>
      <high-use>-</high-use>
      <memstat-req>3127</memstat-req>

      <memstat-size>16, 32, 64, 128, 256, 512, 2048, 4096, 8192, 16384, 32768, 65536, 131072</memstat-size>

```



```

<memstat-name>ip6ndp</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>4</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>in6ifmulti</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>in6greentry</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>iflogical</memstat-name>
<inuse>13</inuse>
<memuse>3</memuse>
<high-use>--</high-use>
<memstat-req>13</memstat-req>
<memstat-size>64,2048</memstat-size>
<memstat-name>iffamily</memstat-name>
<inuse>28</inuse>
<memuse>4</memuse>
<high-use>--</high-use>
<memstat-req>28</memstat-req>
<memstat-size>32,1024,2048</memstat-size>
<memstat-name>rtnextthop</memstat-name>
<inuse>127</inuse>
<memuse>18</memuse>
<high-use>--</high-use>
<memstat-req>129</memstat-req>
<memstat-size>32,256,512,1024,2048,4096</memstat-size>
<memstat-name>metrics</memstat-name>
<inuse>3</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>5</memstat-req>
<memstat-size>256</memstat-size>
<memstat-name>inifmulti</memstat-name>
<inuse>3</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>3</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>ingreentry</memstat-name>
<inuse>6</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>6</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>rnode</memstat-name>
<inuse>68</inuse>
<memuse>2</memuse>
<high-use>--</high-use>
<memstat-req>76</memstat-req>
<memstat-size>16,32</memstat-size>
<memstat-name>rcache</memstat-name>

```



```
<inuse>4</inuse>
<memuse>8</memuse>
<high-use>--</high-use>
<memstat-req>4</memstat-req>
<memstat-size>65536</memstat-size>
<memstat-name>ifdevice</memstat-name>
<inuse>4</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>4</memstat-req>
<memstat-size>16</memstat-size>
<memstat-name>ifstat</memstat-name>
<inuse>40</inuse>
<memuse>22</memuse>
<high-use>--</high-use>
<memstat-req>40</memstat-req>
<memstat-size>512,16384,32768</memstat-size>
<memstat-name>ipfw</memstat-name>
<inuse>42</inuse>
<memuse>23</memuse>
<high-use>--</high-use>
<memstat-req>91</memstat-req>

<memstat-size>16,32,64,128,256,512,1024,16384,32768,65536,131072</memstat-size>
<memstat-name>ifmaddr</memstat-name>
<inuse>103</inuse>
<memuse>3</memuse>
<high-use>--</high-use>
<memstat-req>103</memstat-req>
<memstat-size>16,32</memstat-size>
<memstat-name>rtable</memstat-name>
<inuse>129</inuse>
<memuse>14</memuse>
<high-use>--</high-use>
<memstat-req>139</memstat-req>
<memstat-size>16,32,64,128,1024,16384</memstat-size>
<memstat-name>sysctl</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>14847</memstat-req>
<memstat-size>16,32,64,4096,16384,32768</memstat-size>
<memstat-name>ifaddr</memstat-name>
<inuse>29</inuse>
<memuse>3</memuse>
<high-use>--</high-use>
<memstat-req>29</memstat-req>
<memstat-size>64,128</memstat-size>
<memstat-name>mkey</memstat-name>
<inuse>345</inuse>
<memuse>6</memuse>
<high-use>--</high-use>
<memstat-req>2527</memstat-req>
<memstat-size>16,128</memstat-size>
<memstat-name>pfe_ipc</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>1422</memstat-req>

<memstat-size>16,32,64,128,512,1024,2048,8192,16384,32768,65536,131072</memstat-size>
```



```

    <memstat-name>ifstate</memstat-name>
    <inuse>594</inuse>
    <memuse>51</memuse>
    <high-use>--</high-use>
    <memstat-req>655</memstat-req>

<memstat-size>16,32,64,128,256,1024,2048,4096,16384,32768</memstat-size>
    <memstat-name>itable16</memstat-name>
    <inuse>276</inuse>
    <memuse>52</memuse>
    <high-use>--</high-use>
    <memstat-req>294</memstat-req>
    <memstat-size>1024,4096</memstat-size>
    <memstat-name>itable32</memstat-name>
    <inuse>160</inuse>
    <memuse>10</memuse>
    <high-use>--</high-use>
    <memstat-req>160</memstat-req>
    <memstat-size>64</memstat-size>
    <memstat-name>itable64</memstat-name>
    <inuse>2</inuse>
    <memuse>1</memuse>
    <high-use>--</high-use>
    <memstat-req>2</memstat-req>
    <memstat-size>128</memstat-size>
    <memstat-name>lr</memstat-name>
    <inuse>1</inuse>
    <memuse>1</memuse>
    <high-use>--</high-use>
    <memstat-req>1</memstat-req>
    <memstat-size>16384</memstat-size>
    <memstat-name>pic</memstat-name>
    <inuse>5</inuse>
    <memuse>1</memuse>
    <high-use>--</high-use>
    <memstat-req>5</memstat-req>
    <memstat-size>64,512</memstat-size>
    <memstat-name>pfestat</memstat-name>
    <inuse>0</inuse>
    <memuse>0</memuse>
    <high-use>--</high-use>
    <memstat-req>162</memstat-req>
    <memstat-size>16,32,128,256,16384</memstat-size>
    <memstat-name>gencfg</memstat-name>
    <inuse>224</inuse>
    <memuse>56</memuse>
    <high-use>--</high-use>
    <memstat-req>540</memstat-req>
    <memstat-size>16,32,64,256,512,32768,65536</memstat-size>
    <memstat-name>jsr</memstat-name>
    <inuse>2</inuse>
    <memuse>1</memuse>
    <high-use>--</high-use>
    <memstat-req>4</memstat-req>
    <memstat-size>16</memstat-size>
    <memstat-name>idl</memstat-name>
    <inuse>0</inuse>
    <memuse>0</memuse>
    <high-use>--</high-use>
    <memstat-req>13</memstat-req>

```



```
<memstat-size>16,32,64,128,256,4096,16384,32768,131072</memstat-size>
```

```
<memstat-name>rtsmg</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>2</memstat-req>
<memstat-size>131072</memstat-size>
<memstat-name>module</memstat-name>
<inuse>249</inuse>
<memuse>16</memuse>
<high-use>--</high-use>
<memstat-req>249</memstat-req>
<memstat-size>64,128</memstat-size>
<memstat-name>mtx_pool</memstat-name>
<inuse>1</inuse>
<memuse>8</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>64,128</memstat-size>
<memstat-name>DEVFS3</memstat-name>
<inuse>109</inuse>
<memuse>12</memuse>
<high-use>--</high-use>
<memstat-req>117</memstat-req>
<memstat-size>256</memstat-size>
<memstat-name>DEVFS1</memstat-name>
<inuse>102</inuse>
<memuse>23</memuse>
<high-use>--</high-use>
<memstat-req>109</memstat-req>
<memstat-size>2048</memstat-size>
<memstat-name>pgrp</memstat-name>
<inuse>12</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>21</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>session</memstat-name>
<inuse>8</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>15</memstat-req>
<memstat-size>512</memstat-size>
<memstat-name>proc</memstat-name>
<inuse>2</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>2</memstat-req>
<memstat-size>16384</memstat-size>
<memstat-name>subproc</memstat-name>
<inuse>244</inuse>
<memuse>496</memuse>
<high-use>--</high-use>
<memstat-req>1522</memstat-req>
<memstat-size>2048,131072</memstat-size>
<memstat-name>cred</memstat-name>
<inuse>30</inuse>
<memuse>4</memuse>
<high-use>--</high-use>
<memstat-req>11409</memstat-req>
```



```

<memstat-size>256</memstat-size>
<memstat-name>plimit</memstat-name>
<inuse>17</inuse>
<memuse>4</memuse>
<high-use>--</high-use>
<memstat-req>133</memstat-req>
<memstat-size>2048</memstat-size>
<memstat-name>uidinfo</memstat-name>
<inuse>3</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>6</memstat-req>
<memstat-size>32,512</memstat-size>
<memstat-name>sysctlpid</memstat-name>
<inuse>1117</inuse>
<memuse>34</memuse>
<high-use>--</high-use>
<memstat-req>1117</memstat-req>
<memstat-size>16,32,64</memstat-size>
<memstat-name>sysctltmp</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>743</memstat-req>
<memstat-size>16,32,64,1024</memstat-size>
<memstat-name>umtx</memstat-name>
<inuse>144</inuse>
<memuse>9</memuse>
<high-use>--</high-use>
<memstat-req>144</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>SWAP</memstat-name>
<inuse>2</inuse>
<memuse>209</memuse>
<high-use>--</high-use>
<memstat-req>2</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>bus</memstat-name>
<inuse>496</inuse>
<memuse>55</memuse>
<high-use>--</high-use>
<memstat-req>1196</memstat-req>
<memstat-size>16,32,64,128,32768</memstat-size>
<memstat-name>bus-sc</memstat-name>
<inuse>23</inuse>
<memuse>33</memuse>
<high-use>--</high-use>
<memstat-req>335</memstat-req>

<memstat-size>16,32,64,512,1024,2048,8192,16384,65536,131072</memstat-size>
<memstat-name>devstat</memstat-name>
<inuse>10</inuse>
<memuse>21</memuse>
<high-use>--</high-use>
<memstat-req>10</memstat-req>
<memstat-size>16,131072</memstat-size>
<memstat-name>eventhandler</memstat-name>
<inuse>35</inuse>
<memuse>2</memuse>
<high-use>--</high-use>
<memstat-req>36</memstat-req>

```



```
<memstat-size>32,128</memstat-size>
<memstat-name>kobj</memstat-name>
<inuse>93</inuse>
<memuse>186</memuse>
<high-use>--</high-use>
<memstat-req>111</memstat-req>
<memstat-size>65536</memstat-size>
<memstat-name>DEVFS</memstat-name>
<inuse>8</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>9</memstat-req>
<memstat-size>16,64</memstat-size>
<memstat-name>rman</memstat-name>
<inuse>71</inuse>
<memuse>5</memuse>
<high-use>--</high-use>
<memstat-req>433</memstat-req>
<memstat-size>16,32,64</memstat-size>
<memstat-name>sbuf</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>522</memstat-req>
<memstat-size>16,32,32768,131072</memstat-size>
<memstat-name>NULLFS hash</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>taskqueue</memstat-name>
<inuse>5</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>5</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>turnstiles</memstat-name>
<inuse>145</inuse>
<memuse>10</memuse>
<high-use>--</high-use>
<memstat-req>145</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>Unitno</memstat-name>
<inuse>8</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>44</memstat-req>
<memstat-size>16,64</memstat-size>
<memstat-name>iocltops</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>27622</memstat-req>
<memstat-size>16,64,8192,16384,131072</memstat-size>
<memstat-name>iov</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>18578</memstat-req>
<memstat-size>16,64,128,256,512,1024,2048,131072</memstat-size>
```



```

<memstat-name>msg</memstat-name>
<inuse>4</inuse>
<memuse>25</memuse>
<high-use>--</high-use>
<memstat-req>4</memstat-req>
<memstat-size>32768,131072</memstat-size>
<memstat-name>sem</memstat-name>
<inuse>4</inuse>
<memuse>7</memuse>
<high-use>--</high-use>
<memstat-req>4</memstat-req>
<memstat-size>16384,32768,131072</memstat-size>
<memstat-name>shm</memstat-name>
<inuse>9</inuse>
<memuse>20</memuse>
<high-use>--</high-use>
<memstat-req>14</memstat-req>
<memstat-size>32768</memstat-size>
<memstat-name>ttys</memstat-name>
<inuse>321</inuse>
<memuse>61</memuse>
<high-use>--</high-use>
<memstat-req>528</memstat-req>
<memstat-size>512,32768</memstat-size>
<memstat-name>ptys</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>128</memstat-size>
<memstat-name>mbuf_tag</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>23383</memstat-req>
<memstat-size>16</memstat-size>
<memstat-name>soname</memstat-name>
<inuse>115</inuse>
<memuse>12</memuse>
<high-use>--</high-use>
<memstat-req>24712</memstat-req>
<memstat-size>16,32,64,256</memstat-size>
<memstat-name>pcb</memstat-name>
<inuse>216</inuse>
<memuse>33</memuse>
<high-use>--</high-use>
<memstat-req>484</memstat-req>

<memstat-size>16,32,64,128,1024,2048,4096,16384,32768,65536</memstat-size>
<memstat-name>BIO buffer</memstat-name>
<inuse>43</inuse>
<memuse>86</memuse>
<high-use>--</high-use>
<memstat-req>405</memstat-req>
<memstat-size>65536</memstat-size>
<memstat-name>vfscache</memstat-name>
<inuse>1</inuse>
<memuse>256</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>65536</memstat-size>

```



```
<memstat-name>cluster_save buffer</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>2</memstat-req>
<memstat-size>32,64</memstat-size>
<memstat-name>VFS hash</memstat-name>
<inuse>1</inuse>
<memuse>128</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>32,64</memstat-size>
<memstat-name>vnodes</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>512</memstat-size>
<memstat-name>mount</memstat-name>
<inuse>290</inuse>
<memuse>23</memuse>
<high-use>--</high-use>
<memstat-req>535</memstat-req>
<memstat-size>16,32,64,128,256,4096,32768</memstat-size>
<memstat-name>vnodemarker</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>498</memstat-req>
<memstat-size>16384</memstat-size>
<memstat-name>pfs_nodes</memstat-name>
<inuse>25</inuse>
<memuse>3</memuse>
<high-use>--</high-use>
<memstat-req>25</memstat-req>
<memstat-size>128</memstat-size>
<memstat-name>pfs_vncache</memstat-name>
<inuse>27</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>53</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>STP</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>GEOM</memstat-name>
<inuse>146</inuse>
<memuse>11</memuse>
<high-use>--</high-use>
<memstat-req>1042</memstat-req>

<memstat-size>16,32,64,128,256,512,2048,16384,32768,131072</memstat-size>
<memstat-name>syncache</memstat-name>
<inuse>1</inuse>
<memuse>8</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
```



```

<memstat-size>16,32,64,128,256,512,2048,16384,32768,131072</memstat-size>
  <memstat-name>tlv_stat</memstat-name>
  <inuse>0</inuse>
  <memuse>0</memuse>
  <high-use>--</high-use>
  <memstat-req>8</memstat-req>

<memstat-size>16,32,64,128,256,512,2048,16384,32768,131072</memstat-size>
  <memstat-name>NFS daemon</memstat-name>
  <inuse>1</inuse>
  <memuse>8</memuse>
  <high-use>--</high-use>
  <memstat-req>1</memstat-req>

<memstat-size>16,32,64,128,256,512,2048,16384,32768,131072</memstat-size>
  <memstat-name>p1003.1b</memstat-name>
  <inuse>1</inuse>
  <memuse>1</memuse>
  <high-use>--</high-use>
  <memstat-req>1</memstat-req>
  <memstat-size>16</memstat-size>
  <memstat-name>MD disk</memstat-name>
  <inuse>10</inuse>
  <memuse>20</memuse>
  <high-use>--</high-use>
  <memstat-req>10</memstat-req>
  <memstat-size>65536</memstat-size>
  <memstat-name>ata_generic</memstat-name>
  <inuse>1</inuse>
  <memuse>1</memuse>
  <high-use>--</high-use>
  <memstat-req>6</memstat-req>
  <memstat-size>16,16384,32768</memstat-size>
  <memstat-name>ISOFs mount</memstat-name>
  <inuse>8</inuse>
  <memuse>1</memuse>
  <high-use>--</high-use>
  <memstat-req>15</memstat-req>
  <memstat-size>512</memstat-size>
  <memstat-name>ISOFs node</memstat-name>
  <inuse>1440</inuse>
  <memuse>135</memuse>
  <high-use>--</high-use>
  <memstat-req>1457</memstat-req>
  <memstat-size>128</memstat-size>
  <memstat-name>CAM SIM</memstat-name>
  <inuse>1</inuse>
  <memuse>1</memuse>
  <high-use>--</high-use>
  <memstat-req>1</memstat-req>
  <memstat-size>64</memstat-size>
  <memstat-name>CAM XPT</memstat-name>
  <inuse>6</inuse>
  <memuse>1</memuse>
  <high-use>--</high-use>
  <memstat-req>9</memstat-req>
  <memstat-size>16,64,16384</memstat-size>
  <memstat-name>CAM periph</memstat-name>
  <inuse>1</inuse>
  <memuse>1</memuse>
  <high-use>--</high-use>

```



```
<memstat-req>1</memstat-req>
<memstat-size>128</memstat-size>
<memstat-name>ad_driver</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>256</memstat-size>
<memstat-name>pagedep</memstat-name>
<inuse>1</inuse>
<memuse>32</memuse>
<high-use>--</high-use>
<memstat-req>106</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>inodedep</memstat-name>
<inuse>1</inuse>
<memuse>128</memuse>
<high-use>--</high-use>
<memstat-req>464</memstat-req>
<memstat-size>256</memstat-size>
<memstat-name>newblk</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>336</memstat-req>
<memstat-size>64,4096</memstat-size>
<memstat-name>bmsafemap</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>63</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>allocdirect</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>320</memstat-req>
<memstat-size>128</memstat-size>
<memstat-name>indirdep</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>17</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>allocindir</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>15</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>freefrag</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>12</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>freeblks</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>40</memstat-req>
```



```

<memstat-size>2048</memstat-size>
<memstat-name>freefile</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>101</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>diradd</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>465</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>mkdir</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>136</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>dirrem</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>168</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>newdirblk</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>savedino</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>157</memstat-req>
<memstat-size>512</memstat-size>
<memstat-name>UFS mount</memstat-name>
<inuse>15</inuse>
<memuse>36</memuse>
<high-use>--</high-use>
<memstat-req>15</memstat-req>
<memstat-size>2048,65536,131072</memstat-size>
<memstat-name>ata_dma</memstat-name>
<inuse>2</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>2</memstat-req>
<memstat-size>256</memstat-size>
<memstat-name>UMAHash</memstat-name>
<inuse>1</inuse>
<memuse>2</memuse>
<high-use>--</high-use>
<memstat-req>4</memstat-req>
<memstat-size>4096,16384,32768,65536</memstat-size>
<memstat-name>cdev</memstat-name>
<inuse>22</inuse>
<memuse>3</memuse>
<high-use>--</high-use>
<memstat-req>22</memstat-req>
<memstat-size>256</memstat-size>

```



```
<memstat-name>file_desc</memstat-name>
<inuse>141</inuse>
<memuse>32</memuse>
<high-use>--</high-use>
<memstat-req>1583</memstat-req>
<memstat-size>16,1024,2048,16384</memstat-size>
<memstat-name>VM_pgdata</memstat-name>
<inuse>2</inuse>
<memuse>65</memuse>
<high-use>--</high-use>
<memstat-req>2</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>sigio</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>20</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>kenv</memstat-name>
<inuse>24</inuse>
<memuse>5</memuse>
<high-use>--</high-use>
<memstat-req>27</memstat-req>
<memstat-size>16,32,64,131072</memstat-size>
<memstat-name>atkbddev</memstat-name>
<inuse>2</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>2</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>kqueue</memstat-name>
<inuse>15</inuse>
<memuse>9</memuse>
<high-use>--</high-use>
<memstat-req>19</memstat-req>
<memstat-size>1024,4096,32768</memstat-size>
<memstat-name>proc_args</memstat-name>
<inuse>57</inuse>
<memuse>3</memuse>
<high-use>--</high-use>
<memstat-req>1001</memstat-req>
<memstat-size>16,32,64,128,256,512,1024</memstat-size>
<memstat-name>isadev</memstat-name>
<inuse>21</inuse>
<memuse>2</memuse>
<high-use>--</high-use>
<memstat-req>21</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>zombie</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>1278</memstat-req>
<memstat-size>128</memstat-size>
<memstat-name>ithread</memstat-name>
<inuse>69</inuse>
<memuse>5</memuse>
<high-use>--</high-use>
<memstat-req>69</memstat-req>
<memstat-size>16,64,256</memstat-size>
<memstat-name>legacydrv</memstat-name>
```



```

<inuse>4</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>4</memstat-req>
<memstat-size>16</memstat-size>
<memstat-name>memdesc</memstat-name>
<inuse>1</inuse>
<memuse>4</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>131072</memstat-size>
<memstat-name>nexusdev</memstat-name>
<inuse>2</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>2</memstat-req>
<memstat-size>16</memstat-size>
<memstat-name>CAM queue</memstat-name>
<inuse>3</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>3</memstat-req>
<memstat-size>16</memstat-size>
<memstat-name>$PIR</memstat-name>
<inuse>4</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>4</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>KTRACE</memstat-name>
<inuse>100</inuse>
<memuse>10</memuse>
<high-use>--</high-use>
<memstat-req>100</memstat-req>
<memstat-size>128</memstat-size>
<memstat-name>kbdmux</memstat-name>
<inuse>5</inuse>
<memuse>9</memuse>
<high-use>--</high-use>
<memstat-req>5</memstat-req>
<memstat-size>128,2048,65536,131072</memstat-size>
</vmstat-memstat-malloc>
<vmstat-memstat-zone>
  <zone-name>UMA Kegs:</zone-name>
  <zone-size>136</zone-size>
  <count-limit>0</count-limit>
  <used>71</used>
  <free>1</free>
  <zone-req>71</zone-req>
  <zone-name>UMA Zones:</zone-name>
  <zone-size>120</zone-size>
  <count-limit>0</count-limit>
  <used>71</used>
  <free>19</free>
  <zone-req>71</zone-req>
  <zone-name>UMA Slabs:</zone-name>
  <zone-size>64</zone-size>
  <count-limit>0</count-limit>
  <used>490</used>
  <free>41</free>
  <zone-req>579</zone-req>

```



```
<zone-name>UMA RCntSlabs:</zone-name>
<zone-size>104</zone-size>
<count-limit>0</count-limit>
<used>276</used>
<free>20</free>
<zone-req>276</zone-req>
<zone-name>UMA Hash:</zone-name>
<zone-size>128</zone-size>
<count-limit>0</count-limit>
<used>4</used>
<free>26</free>
<zone-req>5</zone-req>
<zone-name>16 Bucket:</zone-name>
<zone-size>76</zone-size>
<count-limit>0</count-limit>
<used>30</used>
<free>20</free>
<zone-req>30</zone-req>
<zone-name>32 Bucket:</zone-name>
<zone-size>140</zone-size>
<count-limit>0</count-limit>
<used>33</used>
<free>23</free>
<zone-req>33</zone-req>
<zone-name>64 Bucket:</zone-name>
<zone-size>268</zone-size>
<count-limit>0</count-limit>
<used>33</used>
<free>9</free>
<zone-req>33</zone-req>
<zone-name>128 Bucket:</zone-name>
<zone-size>524</zone-size>
<count-limit>0</count-limit>
<used>49</used>
<free>0</free>
<zone-req>49</zone-req>
<zone-name>VM OBJECT:</zone-name>
<zone-size>128</zone-size>
<count-limit>0</count-limit>
<used>2111</used>
<free>79</free>
<zone-req>25214</zone-req>
<zone-name>MAP:</zone-name>
<zone-size>160</zone-size>
<count-limit>0</count-limit>
<used>7</used>
<free>41</free>
<zone-req>7</zone-req>
<zone-name>KMAP ENTRY:</zone-name>
<zone-size>68</zone-size>
<count-limit>35336</count-limit>
<used>19</used>
<free>149</free>
<zone-req>2397</zone-req>
<zone-name>MAP ENTRY:</zone-name>
<zone-size>68</zone-size>
<count-limit>0</count-limit>
<used>2031</used>
<free>153</free>
<zone-req>62417</zone-req>
<zone-name>PV ENTRY:</zone-name>
```



```
<zone-size>24</zone-size>
<count-limit>509095</count-limit>
<used>57177</used>
<free>6333</free>
<zone-req>1033683</zone-req>
<zone-name>DP_fakepg:</zone-name>
<zone-size>72</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>mt_zone:</zone-name>
<zone-size>64</zone-size>
<count-limit>0</count-limit>
<used>238</used>
<free>57</free>
<zone-req>238</zone-req>
<zone-name>16:</zone-name>
<zone-size>16</zone-size>
<count-limit>0</count-limit>
<used>2114</used>
<free>119</free>
<zone-req>80515</zone-req>
<zone-name>32:</zone-name>
<zone-size>32</zone-size>
<count-limit>0</count-limit>
<used>1335</used>
<free>134</free>
<zone-req>10259</zone-req>
<zone-name>64:</zone-name>
<zone-size>64</zone-size>
<count-limit>0</count-limit>
<used>3529</used>
<free>129</free>
<zone-req>29110</zone-req>
<zone-name>96:</zone-name>
<zone-size>96</zone-size>
<count-limit>0</count-limit>
<used>2062</used>
<free>58</free>
<zone-req>4365</zone-req>
<zone-name>112:</zone-name>
<zone-size>112</zone-size>
<count-limit>0</count-limit>
<used>361</used>
<free>164</free>
<zone-req>24613</zone-req>
<zone-name>128:</zone-name>
<zone-size>128</zone-size>
<count-limit>0</count-limit>
<used>359</used>
<free>61</free>
<zone-req>942</zone-req>
<zone-name>160:</zone-name>
<zone-size>160</zone-size>
<count-limit>0</count-limit>
<used>364</used>
<free>44</free>
<zone-req>577</zone-req>
<zone-name>224:</zone-name>
<zone-size>224</zone-size>
```



```
<count-limit>0</count-limit>
<used>422</used>
<free>20</free>
<zone-req>1950</zone-req>
<zone-name>256:</zone-name>
<zone-size>256</zone-size>
<count-limit>0</count-limit>
<used>204</used>
<free>36</free>
<zone-req>1225</zone-req>
<zone-name>288:</zone-name>
<zone-size>288</zone-size>
<count-limit>0</count-limit>
<used>2</used>
<free>24</free>
<zone-req>10</zone-req>
<zone-name>512:</zone-name>
<zone-size>512</zone-size>
<count-limit>0</count-limit>
<used>49</used>
<free>7</free>
<zone-req>911</zone-req>
<zone-name>1024:</zone-name>
<zone-size>1024</zone-size>
<count-limit>0</count-limit>
<used>213</used>
<free>11</free>
<zone-req>1076</zone-req>
<zone-name>2048:</zone-name>
<zone-size>2048</zone-size>
<count-limit>0</count-limit>
<used>199</used>
<free>113</free>
<zone-req>640</zone-req>
<zone-name>4096:</zone-name>
<zone-size>4096</zone-size>
<count-limit>0</count-limit>
<used>144</used>
<free>7</free>
<zone-req>2249</zone-req>
<zone-name>Files:</zone-name>
<zone-size>72</zone-size>
<count-limit>0</count-limit>
<used>665</used>
<free>77</free>
<zone-req>16457</zone-req>
<zone-name>MAC labels:</zone-name>
<zone-size>20</zone-size>
<count-limit>0</count-limit>
<used>3998</used>
<free>227</free>
<zone-req>21947</zone-req>
<zone-name>PROC:</zone-name>
<zone-size>544</zone-size>
<count-limit>0</count-limit>
<used>116</used>
<free>10</free>
<zone-req>1394</zone-req>
<zone-name>THREAD:</zone-name>
<zone-size>416</zone-size>
<count-limit>0</count-limit>
```



```

<used>127</used>
<free>17</free>
<zone-req>131</zone-req>
<zone-name>KSEGRP:</zone-name>
<zone-size>88</zone-size>
<count-limit>0</count-limit>
<used>127</used>
<free>73</free>
<zone-req>131</zone-req>
<zone-name>UPCALL:</zone-name>
<zone-size>44</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>SLEEPQUEUE:</zone-name>
<zone-size>32</zone-size>
<count-limit>0</count-limit>
<used>145</used>
<free>194</free>
<zone-req>145</zone-req>
<zone-name>VMSPACE:</zone-name>
<zone-size>268</zone-size>
<count-limit>0</count-limit>
<used>57</used>
<free>13</free>
<zone-req>1335</zone-req>
<zone-name>mbuf_packet:</zone-name>
<zone-size>256</zone-size>
<count-limit>180000</count-limit>
<used>256</used>
<free>128</free>
<zone-req>49791</zone-req>
<zone-name>mbuf:</zone-name>
<zone-size>256</zone-size>
<count-limit>180000</count-limit>
<used>50</used>
<free>466</free>
<zone-req>105183</zone-req>
<zone-name>mbuf_cluster:</zone-name>
<zone-size>2048</zone-size>
<count-limit>25190</count-limit>
<used>387</used>
<free>165</free>
<zone-req>5976</zone-req>
<zone-name>mbuf_jumbo_pagesize:</zone-name>
<zone-size>4096</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>mbuf_jumbo_9k:</zone-name>
<zone-size>9216</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>mbuf_jumbo_16k:</zone-name>
<zone-size>16384</zone-size>
<count-limit>0</count-limit>
<used>0</used>

```



```
<free>0</free>
<zone-req>0</zone-req>
<zone-name>ACL UMA zone:</zone-name>
<zone-size>388</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>g_bio:</zone-name>
<zone-size>132</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>174</free>
<zone-req>69750</zone-req>
<zone-name>ata_request:</zone-name>
<zone-size>200</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>57</free>
<zone-req>5030</zone-req>
<zone-name>ata_composite:</zone-name>
<zone-size>192</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>GENCFG:</zone-name>
<zone-size>72</zone-size>
<count-limit>1000004</count-limit>
<used>57</used>
<free>102</free>
<zone-req>57</zone-req>
<zone-name>VNODE:</zone-name>
<zone-size>292</zone-size>
<count-limit>0</count-limit>
<used>2718</used>
<free>25</free>
<zone-req>2922</zone-req>
<zone-name>VNODEPOLL:</zone-name>
<zone-size>72</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>S VFS Cache:</zone-name>
<zone-size>68</zone-size>
<count-limit>0</count-limit>
<used>2500</used>
<free>76</free>
<zone-req>3824</zone-req>
<zone-name>L VFS Cache:</zone-name>
<zone-size>291</zone-size>
<count-limit>0</count-limit>
<used>51</used>
<free>14</free>
<zone-req>63</zone-req>
<zone-name>NAMEI:</zone-name>
<zone-size>1024</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>8</free>
```



```
<zone-req>53330</zone-req>
<zone-name>NFSMOUNT:</zone-name>
<zone-size>480</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>NFSNODE:</zone-name>
<zone-size>460</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>PIPE:</zone-name>
<zone-size>404</zone-size>
<count-limit>0</count-limit>
<used>27</used>
<free>9</free>
<zone-req>717</zone-req>
<zone-name>KNOTE:</zone-name>
<zone-size>72</zone-size>
<count-limit>0</count-limit>
<used>42</used>
<free>64</free>
<zone-req>3311</zone-req>
<zone-name>socket:</zone-name>
<zone-size>412</zone-size>
<count-limit>25191</count-limit>
<used>343</used>
<free>8</free>
<zone-req>2524</zone-req>
<zone-name>unpcb:</zone-name>
<zone-size>140</zone-size>
<count-limit>25200</count-limit>
<used>170</used>
<free>26</free>
<zone-req>2157</zone-req>
<zone-name>ipq:</zone-name>
<zone-size>52</zone-size>
<count-limit>216</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>udpcb:</zone-name>
<zone-size>232</zone-size>
<count-limit>25194</count-limit>
<used>19</used>
<free>32</free>
<zone-req>31</zone-req>
<zone-name>inpcb:</zone-name>
<zone-size>232</zone-size>
<count-limit>25194</count-limit>
<used>40</used>
<free>28</free>
<zone-req>105</zone-req>
<zone-name>tcpcb:</zone-name>
<zone-size>520</zone-size>
<count-limit>25193</count-limit>
<used>40</used>
<free>16</free>
<zone-req>105</zone-req>
```



```
<zone-name>tcptw:</zone-name>
<zone-size>56</zone-size>
<count-limit>5092</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>syncache:</zone-name>
<zone-size>128</zone-size>
<count-limit>15360</count-limit>
<used>0</used>
<free>60</free>
<zone-req>55</zone-req>
<zone-name>tcpreass:</zone-name>
<zone-size>20</zone-size>
<count-limit>1690</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>sackhole:</zone-name>
<zone-size>20</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>ripcb:</zone-name>
<zone-size>232</zone-size>
<count-limit>25194</count-limit>
<used>5</used>
<free>29</free>
<zone-req>5</zone-req>
<zone-name>SWAPMETA:</zone-name>
<zone-size>276</zone-size>
<count-limit>94948</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>FFS inode:</zone-name>
<zone-size>132</zone-size>
<count-limit>0</count-limit>
<used>1146</used>
<free>72</free>
<zone-req>1306</zone-req>
<zone-name>FFS1 dinode:</zone-name>
<zone-size>128</zone-size>
<count-limit>0</count-limit>
<used>1146</used>
<free>24</free>
<zone-req>1306</zone-req>
<zone-name>FFS2 dinode:</zone-name>
<zone-size>256</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
</vmstat-memstat-zone>
<vmstat-sumstat>
  <cpu-context-switch>934906</cpu-context-switch>
  <dev-intr>1707986</dev-intr>
  <soft-intr>33819</soft-intr>
  <traps>203604</traps>
  <sys-calls>1200636</sys-calls>
```



```

<kernel-thrds>60</kernel-thrds>
<fork-calls>1313</fork-calls>
<vfork-calls>21</vfork-calls>
<rfork-calls>0</rfork-calls>
<swap-pageins>0</swap-pageins>
<swap-pagedin>0</swap-pagedin>
<swap-pageouts>0</swap-pageouts>
<swap-pagedout>0</swap-pagedout>
<vnode-pageins>23094</vnode-pageins>
<vnode-pagedin>23119</vnode-pagedin>
<vnode-pageouts>226</vnode-pageouts>
<vnode-pagedout>3143</vnode-pagedout>
<page-daemon-wakeup>0</page-daemon-wakeup>
<page-daemon-examined-pages>0</page-daemon-examined-pages>
<pages-reactivated>8821</pages-reactivated>
<copy-on-write-faults>48364</copy-on-write-faults>
<copy-on-write-optimized-faults>31</copy-on-write-optimized-faults>
<zero-fill-pages-zeroed>74665</zero-fill-pages-zeroed>
<zero-fill-pages-prezeroed>70061</zero-fill-pages-prezeroed>
<transit-blocking-page-faults>85</transit-blocking-page-faults>
<total-vm-faults>191824</total-vm-faults>

<pages-affected-by-kernel-thrd-creat>0</pages-affected-by-kernel-thrd-creat>
<pages-affected-by-fork>95343</pages-affected-by-fork>
<pages-affected-by-vfork>3526</pages-affected-by-vfork>
<pages-affected-by-rfork>0</pages-affected-by-rfork>
<pages-freed>221502</pages-freed>
<pages-freed-by-daemon>0</pages-freed-by-daemon>
<pages-freed-by-exiting-proc>75630</pages-freed-by-exiting-proc>
<pages-active>45826</pages-active>
<pages-inactive>13227</pages-inactive>
<pages-in-vm-cache>49278</pages-in-vm-cache>
<pages-wired-down>10640</pages-wired-down>
<pages-free>70706</pages-free>
<bytes-per-page>4096</bytes-per-page>
<swap-pages-used>0</swap-pages-used>
<peak-swap-pages-used>0</peak-swap-pages-used>
<total-name-lookups>214496</total-name-lookups>
<positive-cache-hits>92</positive-cache-hits>
<negative-cache-hits>5</negative-cache-hits>
<pass2>0</pass2>
<cache-deletions>0</cache-deletions>
<cache-falsehits>0</cache-falsehits>
<toolong>0</toolong>
</vmstat-sumstat>
<vmstat-intr>
  <intr-name>irq0: clk      </intr-name>
  <intr-cnt>1243455</intr-cnt>
  <intr-rate>999</intr-rate>
  <intr-name>irq4: sio0     </intr-name>
  <intr-cnt>1140</intr-cnt>
  <intr-rate>0</intr-rate>
  <intr-name>irq8: rtc      </intr-name>
  <intr-cnt>159164</intr-cnt>
  <intr-rate>127</intr-rate>
  <intr-name>irq9: cbb1 fxp0 </intr-name>
  <intr-cnt>28490</intr-cnt>
  <intr-rate>22</intr-rate>
  <intr-name>irq10: fxp1    </intr-name>
  <intr-cnt>20593</intr-cnt>
  <intr-rate>16</intr-rate>

```



```

        <intr-name>irq14: ata0          </intr-name>
        <intr-cnt>5031</intr-cnt>
        <intr-rate>4</intr-rate>
        <intr-name>Total</intr-name>
        <intr-cnt>1457873</intr-cnt>
        <intr-rate>1171</intr-rate>
    </vmstat-intr>
    <vm-kernel-state>
        <vm-kmem-map-free>248524800</vm-kmem-map-free>
    </vm-kernel-state>
    <kernel-direct-mm-size-information>
        <vm-directmm-size-used>4644</vm-directmm-size-used>
        <vm-directmm-size-max>4057334</vm-directmm-size-max>
    </kernel-direct-mm-size-information>
</system-virtual-memory-information>
<cli>
    <banner></banner>
</cli>
</rpc-reply>

```

*Note:* <kernel-direct-mm-size-information> only displays for 64 bit platform.

#### show system virtual-memory (QFX Series)

```

user@switch> show system virtual-memory | display xml
<rpc-reply xmlns:junos="http://xml.juniper.net/junos/11.1R1/junos">
  <system-virtual-memory-information>
    <vmstat-memstat-malloc>
      <memstat-name>CAM dev queue</memstat-name>
      <inuse>1</inuse>
      <memuse>1</memuse>
      <high-use>-</high-use>
      <memstat-req>1</memstat-req>
      <memstat-size>64</memstat-size>
      <memstat-name>entropy</memstat-name>
      <inuse>1024</inuse>
      <memuse>64</memuse>
      <high-use>-</high-use>
      <memstat-req>1024</memstat-req>
      <memstat-size>64</memstat-size>
      <memstat-name>linker</memstat-name>
      <inuse>481</inuse>
      <memuse>1871</memuse>
      <high-use>-</high-use>
      <memstat-req>1145</memstat-req>
      <memstat-size>16, 32, 64, 4096, 32768, 131072</memstat-size>
      <memstat-name>lockf</memstat-name>
      <inuse>56</inuse>
      <memuse>4</memuse>
      <high-use>-</high-use>
      <memstat-req>5998</memstat-req>
      <memstat-size>64</memstat-size>
      <memstat-name>devbuf</memstat-name>
      <inuse>2094</inuse>
      <memuse>3877</memuse>
      <high-use>-</high-use>
      <memstat-req>2099</memstat-req>

      <memstat-size>16, 32, 64, 128, 512, 1024, 4096, 8192, 16384, 32768, 65536, 131072</memstat-size>

      <memstat-name>temp</memstat-name>
      <inuse>21</inuse>
      <memuse>66</memuse>
    </vmstat-memstat-malloc>
  </system-virtual-memory-information>
</rpc-reply>

```



```

<high-use>--</high-use>
<memstat-req>3127</memstat-req>

<memstat-size>16,32,64,128,256,512,2048,4096,8192,16384,32768,65536,131072</memstat-size>

<memstat-name>ip6ndp</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>4</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>in6ifmulti</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>in6grentry</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>iflogical</memstat-name>
<inuse>13</inuse>
<memuse>3</memuse>
<high-use>--</high-use>
<memstat-req>13</memstat-req>
<memstat-size>64,2048</memstat-size>
<memstat-name>iffamily</memstat-name>
<inuse>28</inuse>
<memuse>4</memuse>
<high-use>--</high-use>
<memstat-req>28</memstat-req>
<memstat-size>32,1024,2048</memstat-size>
<memstat-name>rtnexthop</memstat-name>
<inuse>127</inuse>
<memuse>18</memuse>
<high-use>--</high-use>
<memstat-req>129</memstat-req>
<memstat-size>32,256,512,1024,2048,4096</memstat-size>
<memstat-name>metrics</memstat-name>
<inuse>3</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>5</memstat-req>
<memstat-size>256</memstat-size>
<memstat-name>inifmulti</memstat-name>
<inuse>3</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>3</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>ingrentry</memstat-name>
<inuse>6</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>6</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>rnode</memstat-name>
<inuse>68</inuse>

```



```
<memuse>2</memuse>
<high-use>--</high-use>
<memstat-req>76</memstat-req>
<memstat-size>16,32</memstat-size>
<memstat-name>rcache</memstat-name>
<inuse>4</inuse>
<memuse>8</memuse>
<high-use>--</high-use>
<memstat-req>4</memstat-req>
<memstat-size>65536</memstat-size>
<memstat-name>ifdevice</memstat-name>
<inuse>4</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>4</memstat-req>
<memstat-size>16</memstat-size>
<memstat-name>ifstat</memstat-name>
<inuse>40</inuse>
<memuse>22</memuse>
<high-use>--</high-use>
<memstat-req>40</memstat-req>
<memstat-size>512,16384,32768</memstat-size>
<memstat-name>ipfw</memstat-name>
<inuse>42</inuse>
<memuse>23</memuse>
<high-use>--</high-use>
<memstat-req>91</memstat-req>

<memstat-size>16,32,64,128,256,512,1024,16384,32768,65536,131072</memstat-size>
<memstat-name>ifmaddr</memstat-name>
<inuse>103</inuse>
<memuse>3</memuse>
<high-use>--</high-use>
<memstat-req>103</memstat-req>
<memstat-size>16,32</memstat-size>
<memstat-name>rtable</memstat-name>
<inuse>129</inuse>
<memuse>14</memuse>
<high-use>--</high-use>
<memstat-req>139</memstat-req>
<memstat-size>16,32,64,128,1024,16384</memstat-size>
<memstat-name>sysctl</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>14847</memstat-req>
<memstat-size>16,32,64,4096,16384,32768</memstat-size>
<memstat-name>ifaddr</memstat-name>
<inuse>29</inuse>
<memuse>3</memuse>
<high-use>--</high-use>
<memstat-req>29</memstat-req>
<memstat-size>64,128</memstat-size>
<memstat-name>mkey</memstat-name>
<inuse>345</inuse>
<memuse>6</memuse>
<high-use>--</high-use>
<memstat-req>2527</memstat-req>
<memstat-size>16,128</memstat-size>
<memstat-name>pfe_ipc</memstat-name>
<inuse>0</inuse>
```



```

<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>1422</memstat-req>

<memstat-size>16,32,64,128,512,1024,2048,8192,16384,32768,65536,131072</memstat-size>

<memstat-name>ifstate</memstat-name>
<inuse>594</inuse>
<memuse>51</memuse>
<high-use>--</high-use>
<memstat-req>655</memstat-req>

<memstat-size>16,32,64,128,256,1024,2048,4096,16384,32768</memstat-size>
<memstat-name>itable16</memstat-name>
<inuse>276</inuse>
<memuse>52</memuse>
<high-use>--</high-use>
<memstat-req>294</memstat-req>
<memstat-size>1024,4096</memstat-size>
<memstat-name>itable32</memstat-name>
<inuse>160</inuse>
<memuse>10</memuse>
<high-use>--</high-use>
<memstat-req>160</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>itable64</memstat-name>
<inuse>2</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>2</memstat-req>
<memstat-size>128</memstat-size>
<memstat-name>1r</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>16384</memstat-size>
<memstat-name>pic</memstat-name>
<inuse>5</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>5</memstat-req>
<memstat-size>64,512</memstat-size>
<memstat-name>pfestat</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>162</memstat-req>
<memstat-size>16,32,128,256,16384</memstat-size>
<memstat-name>gencfg</memstat-name>
<inuse>224</inuse>
<memuse>56</memuse>
<high-use>--</high-use>
<memstat-req>540</memstat-req>
<memstat-size>16,32,64,256,512,32768,65536</memstat-size>
<memstat-name>jsr</memstat-name>
<inuse>2</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>4</memstat-req>
<memstat-size>16</memstat-size>

```



```
<memstat-name>idl</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>13</memstat-req>
<memstat-size>16,32,64,128,256,4096,16384,32768,131072</memstat-size>
```

```
<memstat-name>rtsmg</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>2</memstat-req>
<memstat-size>131072</memstat-size>
<memstat-name>module</memstat-name>
<inuse>249</inuse>
<memuse>16</memuse>
<high-use>--</high-use>
<memstat-req>249</memstat-req>
<memstat-size>64,128</memstat-size>
<memstat-name>mtx_pool</memstat-name>
<inuse>1</inuse>
<memuse>8</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>64,128</memstat-size>
<memstat-name>DEVFS3</memstat-name>
<inuse>109</inuse>
<memuse>12</memuse>
<high-use>--</high-use>
<memstat-req>117</memstat-req>
<memstat-size>256</memstat-size>
<memstat-name>DEVFS1</memstat-name>
<inuse>102</inuse>
<memuse>23</memuse>
<high-use>--</high-use>
<memstat-req>109</memstat-req>
<memstat-size>2048</memstat-size>
<memstat-name>pgrp</memstat-name>
<inuse>12</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>21</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>session</memstat-name>
<inuse>8</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>15</memstat-req>
<memstat-size>512</memstat-size>
<memstat-name>proc</memstat-name>
<inuse>2</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>2</memstat-req>
<memstat-size>16384</memstat-size>
<memstat-name>subproc</memstat-name>
<inuse>244</inuse>
<memuse>496</memuse>
<high-use>--</high-use>
<memstat-req>1522</memstat-req>
<memstat-size>2048,131072</memstat-size>
```



```

<memstat-name>cred</memstat-name>
<inuse>30</inuse>
<memuse>4</memuse>
<high-use>--</high-use>
<memstat-req>11409</memstat-req>
<memstat-size>256</memstat-size>
<memstat-name>plimit</memstat-name>
<inuse>17</inuse>
<memuse>4</memuse>
<high-use>--</high-use>
<memstat-req>133</memstat-req>
<memstat-size>2048</memstat-size>
<memstat-name>uidinfo</memstat-name>
<inuse>3</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>6</memstat-req>
<memstat-size>32,512</memstat-size>
<memstat-name>sysctluid</memstat-name>
<inuse>1117</inuse>
<memuse>34</memuse>
<high-use>--</high-use>
<memstat-req>1117</memstat-req>
<memstat-size>16,32,64</memstat-size>
<memstat-name>sysctltmp</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>743</memstat-req>
<memstat-size>16,32,64,1024</memstat-size>
<memstat-name>umtx</memstat-name>
<inuse>144</inuse>
<memuse>9</memuse>
<high-use>--</high-use>
<memstat-req>144</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>SWAP</memstat-name>
<inuse>2</inuse>
<memuse>209</memuse>
<high-use>--</high-use>
<memstat-req>2</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>bus</memstat-name>
<inuse>496</inuse>
<memuse>55</memuse>
<high-use>--</high-use>
<memstat-req>1196</memstat-req>
<memstat-size>16,32,64,128,32768</memstat-size>
<memstat-name>bus-sc</memstat-name>
<inuse>23</inuse>
<memuse>33</memuse>
<high-use>--</high-use>
<memstat-req>335</memstat-req>

<memstat-size>16,32,64,512,1024,2048,8192,16384,65536,131072</memstat-size>
<memstat-name>devstat</memstat-name>
<inuse>10</inuse>
<memuse>21</memuse>
<high-use>--</high-use>
<memstat-req>10</memstat-req>
<memstat-size>16,131072</memstat-size>

```



```
<memstat-name>eventhandler</memstat-name>
<inuse>35</inuse>
<memuse>2</memuse>
<high-use>--</high-use>
<memstat-req>36</memstat-req>
<memstat-size>32,128</memstat-size>
<memstat-name>kobj</memstat-name>
<inuse>93</inuse>
<memuse>186</memuse>
<high-use>--</high-use>
<memstat-req>111</memstat-req>
<memstat-size>65536</memstat-size>
<memstat-name>DEVFS</memstat-name>
<inuse>8</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>9</memstat-req>
<memstat-size>16,64</memstat-size>
<memstat-name>rman</memstat-name>
<inuse>71</inuse>
<memuse>5</memuse>
<high-use>--</high-use>
<memstat-req>433</memstat-req>
<memstat-size>16,32,64</memstat-size>
<memstat-name>sbuf</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>522</memstat-req>
<memstat-size>16,32,32768,131072</memstat-size>
<memstat-name>NULLFS hash</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>taskqueue</memstat-name>
<inuse>5</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>5</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>turnstiles</memstat-name>
<inuse>145</inuse>
<memuse>10</memuse>
<high-use>--</high-use>
<memstat-req>145</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>Unitno</memstat-name>
<inuse>8</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>44</memstat-req>
<memstat-size>16,64</memstat-size>
<memstat-name>ioclops</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>27622</memstat-req>
<memstat-size>16,64,8192,16384,131072</memstat-size>
<memstat-name>iov</memstat-name>
```



```

<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>18578</memstat-req>
<memstat-size>16,64,128,256,512,1024,2048,131072</memstat-size>
<memstat-name>msg</memstat-name>
<inuse>4</inuse>
<memuse>25</memuse>
<high-use>--</high-use>
<memstat-req>4</memstat-req>
<memstat-size>32768,131072</memstat-size>
<memstat-name>sem</memstat-name>
<inuse>4</inuse>
<memuse>7</memuse>
<high-use>--</high-use>
<memstat-req>4</memstat-req>
<memstat-size>16384,32768,131072</memstat-size>
<memstat-name>shm</memstat-name>
<inuse>9</inuse>
<memuse>20</memuse>
<high-use>--</high-use>
<memstat-req>14</memstat-req>
<memstat-size>32768</memstat-size>
<memstat-name>ttys</memstat-name>
<inuse>321</inuse>
<memuse>61</memuse>
<high-use>--</high-use>
<memstat-req>528</memstat-req>
<memstat-size>512,32768</memstat-size>
<memstat-name>ptys</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>128</memstat-size>
<memstat-name>mbuf_tag</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>23383</memstat-req>
<memstat-size>16</memstat-size>
<memstat-name>soname</memstat-name>
<inuse>115</inuse>
<memuse>12</memuse>
<high-use>--</high-use>
<memstat-req>24712</memstat-req>
<memstat-size>16,32,64,256</memstat-size>
<memstat-name>pcb</memstat-name>
<inuse>216</inuse>
<memuse>33</memuse>
<high-use>--</high-use>
<memstat-req>484</memstat-req>

<memstat-size>16,32,64,128,1024,2048,4096,16384,32768,65536</memstat-size>
<memstat-name>BIO buffer</memstat-name>
<inuse>43</inuse>
<memuse>86</memuse>
<high-use>--</high-use>
<memstat-req>405</memstat-req>
<memstat-size>65536</memstat-size>
<memstat-name>vfscache</memstat-name>

```



```
<inuse>1</inuse>
<memuse>256</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>65536</memstat-size>
<memstat-name>cluster_save buffer</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>2</memstat-req>
<memstat-size>32,64</memstat-size>
<memstat-name>VFS hash</memstat-name>
<inuse>1</inuse>
<memuse>128</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>32,64</memstat-size>
<memstat-name>vnodes</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>512</memstat-size>
<memstat-name>mount</memstat-name>
<inuse>290</inuse>
<memuse>23</memuse>
<high-use>--</high-use>
<memstat-req>535</memstat-req>
<memstat-size>16,32,64,128,256,4096,32768</memstat-size>
<memstat-name>vnodemarker</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>498</memstat-req>
<memstat-size>16384</memstat-size>
<memstat-name>pfs_nodes</memstat-name>
<inuse>25</inuse>
<memuse>3</memuse>
<high-use>--</high-use>
<memstat-req>25</memstat-req>
<memstat-size>128</memstat-size>
<memstat-name>pfs_vncache</memstat-name>
<inuse>27</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>53</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>STP</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>GEOM</memstat-name>
<inuse>146</inuse>
<memuse>11</memuse>
<high-use>--</high-use>
<memstat-req>1042</memstat-req>

<memstat-size>16,32,64,128,256,512,2048,16384,32768,131072</memstat-size>
<memstat-name>syncache</memstat-name>
```



```

<inuse>1</inuse>
<memuse>8</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>

<memstat-size>16,32,64,128,256,512,2048,16384,32768,131072</memstat-size>
<memstat-name>tlv_stat</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>8</memstat-req>

<memstat-size>16,32,64,128,256,512,2048,16384,32768,131072</memstat-size>
<memstat-name>NFS daemon</memstat-name>
<inuse>1</inuse>
<memuse>8</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>

<memstat-size>16,32,64,128,256,512,2048,16384,32768,131072</memstat-size>
<memstat-name>p1003.1b</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>16</memstat-size>
<memstat-name>MD disk</memstat-name>
<inuse>10</inuse>
<memuse>20</memuse>
<high-use>--</high-use>
<memstat-req>10</memstat-req>
<memstat-size>65536</memstat-size>
<memstat-name>ata_generic</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>6</memstat-req>
<memstat-size>16,16384,32768</memstat-size>
<memstat-name>ISofs mount</memstat-name>
<inuse>8</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>15</memstat-req>
<memstat-size>512</memstat-size>
<memstat-name>ISofs node</memstat-name>
<inuse>1440</inuse>
<memuse>135</memuse>
<high-use>--</high-use>
<memstat-req>1457</memstat-req>
<memstat-size>128</memstat-size>
<memstat-name>CAM SIM</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>CAM XPT</memstat-name>
<inuse>6</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>9</memstat-req>

```



```
<memstat-size>16,64,16384</memstat-size>
<memstat-name>CAM_periph</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>128</memstat-size>
<memstat-name>ad_driver</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>256</memstat-size>
<memstat-name>pagedep</memstat-name>
<inuse>1</inuse>
<memuse>32</memuse>
<high-use>--</high-use>
<memstat-req>106</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>inodedep</memstat-name>
<inuse>1</inuse>
<memuse>128</memuse>
<high-use>--</high-use>
<memstat-req>464</memstat-req>
<memstat-size>256</memstat-size>
<memstat-name>newblk</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>336</memstat-req>
<memstat-size>64,4096</memstat-size>
<memstat-name>bmsafemap</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>63</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>allocdirect</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>320</memstat-req>
<memstat-size>128</memstat-size>
<memstat-name>indirdep</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>17</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>allocindir</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>15</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>freefrag</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>12</memstat-req>
<memstat-size>32</memstat-size>
```



```

<memstat-name>freeblks</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>40</memstat-req>
<memstat-size>2048</memstat-size>
<memstat-name>freefile</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>101</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>diradd</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>465</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>mkdir</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>136</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>dirrem</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>168</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>newdirblk</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>savedino</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>157</memstat-req>
<memstat-size>512</memstat-size>
<memstat-name>UFS mount</memstat-name>
<inuse>15</inuse>
<memuse>36</memuse>
<high-use>--</high-use>
<memstat-req>15</memstat-req>
<memstat-size>2048,65536,131072</memstat-size>
<memstat-name>ata_dma</memstat-name>
<inuse>2</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>2</memstat-req>
<memstat-size>256</memstat-size>
<memstat-name>UMAHash</memstat-name>
<inuse>1</inuse>
<memuse>2</memuse>
<high-use>--</high-use>
<memstat-req>4</memstat-req>
<memstat-size>4096,16384,32768,65536</memstat-size>
<memstat-name>cdev</memstat-name>

```



```
<inuse>22</inuse>
<memuse>3</memuse>
<high-use>--</high-use>
<memstat-req>22</memstat-req>
<memstat-size>256</memstat-size>
<memstat-name>file_desc</memstat-name>
<inuse>141</inuse>
<memuse>32</memuse>
<high-use>--</high-use>
<memstat-req>1583</memstat-req>
<memstat-size>16,1024,2048,16384</memstat-size>
<memstat-name>VM_pgdata</memstat-name>
<inuse>2</inuse>
<memuse>65</memuse>
<high-use>--</high-use>
<memstat-req>2</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>sigio</memstat-name>
<inuse>1</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>20</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>kenv</memstat-name>
<inuse>24</inuse>
<memuse>5</memuse>
<high-use>--</high-use>
<memstat-req>27</memstat-req>
<memstat-size>16,32,64,131072</memstat-size>
<memstat-name>atkbddev</memstat-name>
<inuse>2</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>2</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>kqueue</memstat-name>
<inuse>15</inuse>
<memuse>9</memuse>
<high-use>--</high-use>
<memstat-req>19</memstat-req>
<memstat-size>1024,4096,32768</memstat-size>
<memstat-name>proc_args</memstat-name>
<inuse>57</inuse>
<memuse>3</memuse>
<high-use>--</high-use>
<memstat-req>1001</memstat-req>
<memstat-size>16,32,64,128,256,512,1024</memstat-size>
<memstat-name>isadev</memstat-name>
<inuse>21</inuse>
<memuse>2</memuse>
<high-use>--</high-use>
<memstat-req>21</memstat-req>
<memstat-size>64</memstat-size>
<memstat-name>zombie</memstat-name>
<inuse>0</inuse>
<memuse>0</memuse>
<high-use>--</high-use>
<memstat-req>1278</memstat-req>
<memstat-size>128</memstat-size>
<memstat-name>ithread</memstat-name>
<inuse>69</inuse>
```



```

<memuse>5</memuse>
<high-use>--</high-use>
<memstat-req>69</memstat-req>
<memstat-size>16,64,256</memstat-size>
<memstat-name>legacydrv</memstat-name>
<inuse>4</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>4</memstat-req>
<memstat-size>16</memstat-size>
<memstat-name>memdesc</memstat-name>
<inuse>1</inuse>
<memuse>4</memuse>
<high-use>--</high-use>
<memstat-req>1</memstat-req>
<memstat-size>131072</memstat-size>
<memstat-name>nexusdev</memstat-name>
<inuse>2</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>2</memstat-req>
<memstat-size>16</memstat-size>
<memstat-name>CAM queue</memstat-name>
<inuse>3</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>3</memstat-req>
<memstat-size>16</memstat-size>
<memstat-name>$PIR</memstat-name>
<inuse>4</inuse>
<memuse>1</memuse>
<high-use>--</high-use>
<memstat-req>4</memstat-req>
<memstat-size>32</memstat-size>
<memstat-name>KTRACE</memstat-name>
<inuse>100</inuse>
<memuse>10</memuse>
<high-use>--</high-use>
<memstat-req>100</memstat-req>
<memstat-size>128</memstat-size>
<memstat-name>kbdmux</memstat-name>
<inuse>5</inuse>
<memuse>9</memuse>
<high-use>--</high-use>
<memstat-req>5</memstat-req>
<memstat-size>128,2048,65536,131072</memstat-size>
</vmstat-memstat-malloc>
<vmstat-memstat-zone>
  <zone-name>UMA Kegs:</zone-name>
  <zone-size>136</zone-size>
  <count-limit>0</count-limit>
  <used>71</used>
  <free>1</free>
  <zone-req>71</zone-req>
  <zone-name>UMA Zones:</zone-name>
  <zone-size>120</zone-size>
  <count-limit>0</count-limit>
  <used>71</used>
  <free>19</free>
  <zone-req>71</zone-req>
  <zone-name>UMA Slabs:</zone-name>

```



```
<zone-size>64</zone-size>
<count-limit>0</count-limit>
<used>490</used>
<free>41</free>
<zone-req>579</zone-req>
<zone-name>UMA RCntSlabs:</zone-name>
<zone-size>104</zone-size>
<count-limit>0</count-limit>
<used>276</used>
<free>20</free>
<zone-req>276</zone-req>
<zone-name>UMA Hash:</zone-name>
<zone-size>128</zone-size>
<count-limit>0</count-limit>
<used>4</used>
<free>26</free>
<zone-req>5</zone-req>
<zone-name>16 Bucket:</zone-name>
<zone-size>76</zone-size>
<count-limit>0</count-limit>
<used>30</used>
<free>20</free>
<zone-req>30</zone-req>
<zone-name>32 Bucket:</zone-name>
<zone-size>140</zone-size>
<count-limit>0</count-limit>
<used>33</used>
<free>23</free>
<zone-req>33</zone-req>
<zone-name>64 Bucket:</zone-name>
<zone-size>268</zone-size>
<count-limit>0</count-limit>
<used>33</used>
<free>9</free>
<zone-req>33</zone-req>
<zone-name>128 Bucket:</zone-name>
<zone-size>524</zone-size>
<count-limit>0</count-limit>
<used>49</used>
<free>0</free>
<zone-req>49</zone-req>
<zone-name>VM OBJECT:</zone-name>
<zone-size>128</zone-size>
<count-limit>0</count-limit>
<used>2111</used>
<free>79</free>
<zone-req>25214</zone-req>
<zone-name>MAP:</zone-name>
<zone-size>160</zone-size>
<count-limit>0</count-limit>
<used>7</used>
<free>41</free>
<zone-req>7</zone-req>
<zone-name>KMAP ENTRY:</zone-name>
<zone-size>68</zone-size>
<count-limit>35336</count-limit>
<used>19</used>
<free>149</free>
<zone-req>2397</zone-req>
<zone-name>MAP ENTRY:</zone-name>
<zone-size>68</zone-size>
```



```
<count-limit>0</count-limit>
<used>2031</used>
<free>153</free>
<zone-req>62417</zone-req>
<zone-name>PV ENTRY:</zone-name>
<zone-size>24</zone-size>
<count-limit>509095</count-limit>
<used>57177</used>
<free>6333</free>
<zone-req>1033683</zone-req>
<zone-name>DP fakepg:</zone-name>
<zone-size>72</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>mt_zone:</zone-name>
<zone-size>64</zone-size>
<count-limit>0</count-limit>
<used>238</used>
<free>57</free>
<zone-req>238</zone-req>
<zone-name>16:</zone-name>
<zone-size>16</zone-size>
<count-limit>0</count-limit>
<used>2114</used>
<free>119</free>
<zone-req>80515</zone-req>
<zone-name>32:</zone-name>
<zone-size>32</zone-size>
<count-limit>0</count-limit>
<used>1335</used>
<free>134</free>
<zone-req>10259</zone-req>
<zone-name>64:</zone-name>
<zone-size>64</zone-size>
<count-limit>0</count-limit>
<used>3529</used>
<free>129</free>
<zone-req>29110</zone-req>
<zone-name>96:</zone-name>
<zone-size>96</zone-size>
<count-limit>0</count-limit>
<used>2062</used>
<free>58</free>
<zone-req>4365</zone-req>
<zone-name>112:</zone-name>
<zone-size>112</zone-size>
<count-limit>0</count-limit>
<used>361</used>
<free>164</free>
<zone-req>24613</zone-req>
<zone-name>128:</zone-name>
<zone-size>128</zone-size>
<count-limit>0</count-limit>
<used>359</used>
<free>61</free>
<zone-req>942</zone-req>
<zone-name>160:</zone-name>
<zone-size>160</zone-size>
<count-limit>0</count-limit>
```



```
<used>364</used>
<free>44</free>
<zone-req>577</zone-req>
<zone-name>224:</zone-name>
<zone-size>224</zone-size>
<count-limit>0</count-limit>
<used>422</used>
<free>20</free>
<zone-req>1950</zone-req>
<zone-name>256:</zone-name>
<zone-size>256</zone-size>
<count-limit>0</count-limit>
<used>204</used>
<free>36</free>
<zone-req>1225</zone-req>
<zone-name>288:</zone-name>
<zone-size>288</zone-size>
<count-limit>0</count-limit>
<used>2</used>
<free>24</free>
<zone-req>10</zone-req>
<zone-name>512:</zone-name>
<zone-size>512</zone-size>
<count-limit>0</count-limit>
<used>49</used>
<free>7</free>
<zone-req>911</zone-req>
<zone-name>1024:</zone-name>
<zone-size>1024</zone-size>
<count-limit>0</count-limit>
<used>213</used>
<free>11</free>
<zone-req>1076</zone-req>
<zone-name>2048:</zone-name>
<zone-size>2048</zone-size>
<count-limit>0</count-limit>
<used>199</used>
<free>113</free>
<zone-req>640</zone-req>
<zone-name>4096:</zone-name>
<zone-size>4096</zone-size>
<count-limit>0</count-limit>
<used>144</used>
<free>7</free>
<zone-req>2249</zone-req>
<zone-name>Files:</zone-name>
<zone-size>72</zone-size>
<count-limit>0</count-limit>
<used>665</used>
<free>77</free>
<zone-req>16457</zone-req>
<zone-name>MAC labels:</zone-name>
<zone-size>20</zone-size>
<count-limit>0</count-limit>
<used>3998</used>
<free>227</free>
<zone-req>21947</zone-req>
<zone-name>PROC:</zone-name>
<zone-size>544</zone-size>
<count-limit>0</count-limit>
<used>116</used>
```



```
<free>10</free>
<zone-req>1394</zone-req>
<zone-name>THREAD:</zone-name>
<zone-size>416</zone-size>
<count-limit>0</count-limit>
<used>127</used>
<free>17</free>
<zone-req>131</zone-req>
<zone-name>KSEGRP:</zone-name>
<zone-size>88</zone-size>
<count-limit>0</count-limit>
<used>127</used>
<free>73</free>
<zone-req>131</zone-req>
<zone-name>UPCALL:</zone-name>
<zone-size>44</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>SLEEPQUEUE:</zone-name>
<zone-size>32</zone-size>
<count-limit>0</count-limit>
<used>145</used>
<free>194</free>
<zone-req>145</zone-req>
<zone-name>VMSPACE:</zone-name>
<zone-size>268</zone-size>
<count-limit>0</count-limit>
<used>57</used>
<free>13</free>
<zone-req>1335</zone-req>
<zone-name>mbuf_packet:</zone-name>
<zone-size>256</zone-size>
<count-limit>180000</count-limit>
<used>256</used>
<free>128</free>
<zone-req>49791</zone-req>
<zone-name>mbuf:</zone-name>
<zone-size>256</zone-size>
<count-limit>180000</count-limit>
<used>50</used>
<free>466</free>
<zone-req>105183</zone-req>
<zone-name>mbuf_cluster:</zone-name>
<zone-size>2048</zone-size>
<count-limit>25190</count-limit>
<used>387</used>
<free>165</free>
<zone-req>5976</zone-req>
<zone-name>mbuf_jumbo_pagesize:</zone-name>
<zone-size>4096</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>mbuf_jumbo_9k:</zone-name>
<zone-size>9216</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
```



```
<zone-req>0</zone-req>
<zone-name>mbuf_jumbo_16k:</zone-name>
<zone-size>16384</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>ACL UMA zone:</zone-name>
<zone-size>388</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>g_bio:</zone-name>
<zone-size>132</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>174</free>
<zone-req>69750</zone-req>
<zone-name>ata_request:</zone-name>
<zone-size>200</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>57</free>
<zone-req>5030</zone-req>
<zone-name>ata_composite:</zone-name>
<zone-size>192</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>GENCFG:</zone-name>
<zone-size>72</zone-size>
<count-limit>1000004</count-limit>
<used>57</used>
<free>102</free>
<zone-req>57</zone-req>
<zone-name>VNODE:</zone-name>
<zone-size>292</zone-size>
<count-limit>0</count-limit>
<used>2718</used>
<free>25</free>
<zone-req>2922</zone-req>
<zone-name>VNODEPOLL:</zone-name>
<zone-size>72</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>S VFS Cache:</zone-name>
<zone-size>68</zone-size>
<count-limit>0</count-limit>
<used>2500</used>
<free>76</free>
<zone-req>3824</zone-req>
<zone-name>L VFS Cache:</zone-name>
<zone-size>291</zone-size>
<count-limit>0</count-limit>
<used>51</used>
<free>14</free>
<zone-req>63</zone-req>
```



```
<zone-name>NAMEI:</zone-name>
<zone-size>1024</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>8</free>
<zone-req>53330</zone-req>
<zone-name>NFSMOUNT:</zone-name>
<zone-size>480</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>NFSNODE:</zone-name>
<zone-size>460</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>PIPE:</zone-name>
<zone-size>404</zone-size>
<count-limit>0</count-limit>
<used>27</used>
<free>9</free>
<zone-req>717</zone-req>
<zone-name>KNOTE:</zone-name>
<zone-size>72</zone-size>
<count-limit>0</count-limit>
<used>42</used>
<free>64</free>
<zone-req>3311</zone-req>
<zone-name>socket:</zone-name>
<zone-size>412</zone-size>
<count-limit>25191</count-limit>
<used>343</used>
<free>8</free>
<zone-req>2524</zone-req>
<zone-name>unpcb:</zone-name>
<zone-size>140</zone-size>
<count-limit>25200</count-limit>
<used>170</used>
<free>26</free>
<zone-req>2157</zone-req>
<zone-name>ipq:</zone-name>
<zone-size>52</zone-size>
<count-limit>216</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>udpcb:</zone-name>
<zone-size>232</zone-size>
<count-limit>25194</count-limit>
<used>19</used>
<free>32</free>
<zone-req>31</zone-req>
<zone-name>inpcb:</zone-name>
<zone-size>232</zone-size>
<count-limit>25194</count-limit>
<used>40</used>
<free>28</free>
<zone-req>105</zone-req>
<zone-name>tcpcb:</zone-name>
```



```
<zone-size>520</zone-size>
<count-limit>25193</count-limit>
<used>40</used>
<free>16</free>
<zone-req>105</zone-req>
<zone-name>tcptw:</zone-name>
<zone-size>56</zone-size>
<count-limit>5092</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>syncache:</zone-name>
<zone-size>128</zone-size>
<count-limit>15360</count-limit>
<used>0</used>
<free>60</free>
<zone-req>55</zone-req>
<zone-name>tcpreass:</zone-name>
<zone-size>20</zone-size>
<count-limit>1690</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>sackhole:</zone-name>
<zone-size>20</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>ripcb:</zone-name>
<zone-size>232</zone-size>
<count-limit>25194</count-limit>
<used>5</used>
<free>29</free>
<zone-req>5</zone-req>
<zone-name>SWAPMETA:</zone-name>
<zone-size>276</zone-size>
<count-limit>94948</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
<zone-name>FFS inode:</zone-name>
<zone-size>132</zone-size>
<count-limit>0</count-limit>
<used>1146</used>
<free>72</free>
<zone-req>1306</zone-req>
<zone-name>FFS1 dinode:</zone-name>
<zone-size>128</zone-size>
<count-limit>0</count-limit>
<used>1146</used>
<free>24</free>
<zone-req>1306</zone-req>
<zone-name>FFS2 dinode:</zone-name>
<zone-size>256</zone-size>
<count-limit>0</count-limit>
<used>0</used>
<free>0</free>
<zone-req>0</zone-req>
</vmstat-memstat-zone>
<vmstat-sumstat>
```



```

<cpu-context-switch>934906</cpu-context-switch>
<dev-intr>1707986</dev-intr>
<soft-intr>33819</soft-intr>
<traps>203604</traps>
<sys-calls>1200636</sys-calls>
<kernel-thrds>60</kernel-thrds>
<fork-calls>1313</fork-calls>
<vfork-calls>21</vfork-calls>
<rfork-calls>0</rfork-calls>
<swap-pageins>0</swap-pageins>
<swap-pagedin>0</swap-pagedin>
<swap-pageouts>0</swap-pageouts>
<swap-pagedout>0</swap-pagedout>
<vnode-pageins>23094</vnode-pageins>
<vnode-pagedin>23119</vnode-pagedin>
<vnode-pageouts>226</vnode-pageouts>
<vnode-pagedout>3143</vnode-pagedout>
<page-daemon-wakeup>0</page-daemon-wakeup>
<page-daemon-examined-pages>0</page-daemon-examined-pages>
<pages-reactivated>8821</pages-reactivated>
<copy-on-write-faults>48364</copy-on-write-faults>
<copy-on-write-optimized-faults>31</copy-on-write-optimized-faults>
<zero-fill-pages-zeroed>74665</zero-fill-pages-zeroed>
<zero-fill-pages-prezeroed>70061</zero-fill-pages-prezeroed>
<transit-blocking-page-faults>85</transit-blocking-page-faults>
<total-vm-faults>191824</total-vm-faults>

<pages-affected-by-kernel-thrd-creat>0</pages-affected-by-kernel-thrd-creat>
<pages-affected-by-fork>95343</pages-affected-by-fork>
<pages-affected-by-vfork>3526</pages-affected-by-vfork>
<pages-affected-by-rfork>0</pages-affected-by-rfork>
<pages-freed>221502</pages-freed>
<pages-freed-by-daemon>0</pages-freed-by-daemon>
<pages-freed-by-exiting-proc>75630</pages-freed-by-exiting-proc>
<pages-active>45826</pages-active>
<pages-inactive>13227</pages-inactive>
<pages-in-vm-cache>49278</pages-in-vm-cache>
<pages-wired-down>10640</pages-wired-down>
<pages-free>70706</pages-free>
<bytes-per-page>4096</bytes-per-page>
<swap-pages-used>0</swap-pages-used>
<peak-swap-pages-used>0</peak-swap-pages-used>
<total-name-lookups>214496</total-name-lookups>
<positive-cache-hits>92</positive-cache-hits>
<negative-cache-hits>5</negative-cache-hits>
<pass2>0</pass2>
<cache-deletions>0</cache-deletions>
<cache-falsehits>0</cache-falsehits>
<toolong>0</toolong>
</vmstat-sumstat>
<vmstat-intr>
  <intr-name>irq0: clk      </intr-name>
  <intr-cnt>1243455</intr-cnt>
  <intr-rate>999</intr-rate>
  <intr-name>irq4: sio0     </intr-name>
  <intr-cnt>1140</intr-cnt>
  <intr-rate>0</intr-rate>
  <intr-name>irq8: rtc      </intr-name>
  <intr-cnt>159164</intr-cnt>
  <intr-rate>127</intr-rate>
  <intr-name>irq9: cbb1 fxp0 </intr-name>

```



```
<intr-cnt>28490</intr-cnt>
<intr-rate>22</intr-rate>
<intr-name>irq10: fxp1      </intr-name>
<intr-cnt>20593</intr-cnt>
<intr-rate>16</intr-rate>
<intr-name>irq14: ata0     </intr-name>
<intr-cnt>5031</intr-cnt>
<intr-rate>4</intr-rate>
<intr-name>Total</intr-name>
<intr-cnt>1457873</intr-cnt>
<intr-rate>1171</intr-rate>
</vmstat-intr>
<vm-kernel-state>
  <vm-kmem-map-free>248524800</vm-kmem-map-free>
</vm-kernel-state>
</system-virtual-memory-information>
<cli>
  <banner></banner>
</cli>
</rpc-reply>
```



## show version

<b>Syntax</b>	show version <brief   detail>
<b>Syntax (EX Series Switches)</b>	show version <all-members> <brief   detail> <local> <member <i>member-id</i> >
<b>Syntax (TX Matrix Router)</b>	show version <brief   detail> <all-chassis   all-lcc   lcc <i>number</i>   scc>
<b>Syntax (TX Matrix Plus Router)</b>	show version <all-chassis   all-lcc   lcc <i>number</i>   sfc <i>number</i> > <brief   detail>
<b>Syntax (MX Series Router)</b>	show version <brief   detail> <all-members> <local> <member <i>member-id</i> >
<b>Syntax (QFX Series)</b>	show version <brief   detail> <component <i>component-name</i>   all>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the hostname and version information about the software running on the router or switch.
<b>Options</b>	<p><b>none</b>—Display standard information about the hostname and version of the software running on the router or switch.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>all-members</b>—(EX4200 switches and MX Series routers only) (Optional) Display standard information about the hostname and version of the software running on all members of the Virtual Chassis configuration.</p> <p><b>component all</b>—(QFabric systems only) (Optional) Display the host name and version information about the software running on all the components on the QFabric system.</p> <p><b>component <i>component-name</i></b>—(QFabric systems only) (Optional) Display the host name and version information about the software running on a specific QFabric system component. Replace <i>component-name</i> with the name of the QFabric system component.</p>



component. The *component-name* can be the name of a diagnostics Routing Engine, Director group, fabric control Routing Engine, fabric manager Routing Engine, Interconnect device, or Node group.

**local**—(EX4200 switches and MX Series routers only) (Optional) Display standard information about the hostname and version of the software running on the local Virtual Chassis member.

**member *member-id***—(EX4200 switches and MX Series routers only) (Optional) Display standard information about the hostname and version of the software running on the specified member of the Virtual Chassis configuration. For EX4200 switches, replace *member-id* with a value from 0 through 9. For an MX Series Virtual Chassis, replace *member-id* with a value of 0 or 1.

**scc**—(TX Matrix routers only) (Optional) Display the hostname and version information about the software running on the TX Matrix router (or switch-card chassis).

**sfc *number***—(TX Matrix Plus routers only) (Optional) Display the hostname and version information about the software running on the TX Matrix Plus router (or switch-fabric chassis). Replace *number* with 0.

**Additional Information** By default, when you issue the **show version** command on a TX Matrix or TX Matrix Plus master Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) or T1600 (in a routing matrix based on a TX Matrix Plus router) master Routing Engines connected to it. Likewise, if you issue the same command on the TX Matrix or TX Matrix Plus backup Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) or T1600 (in a routing matrix based on a TX Matrix Plus router) backup Routing Engines that are connected to it.

**Required Privilege Level**

view

**List of Sample Output**

[show version on page 1087](#)  
[show version \(TX Matrix Plus Router\) on page 1088](#)  
[show version \(MX Series Router\) on page 1090](#)  
[show version \(QFX3500 Switch\) on page 1090](#)  
[show version \(QFabric System\) on page 1091](#)  
[show version component all \(QFabric System\) on page 1091](#)



## Sample Output

### show version

```
user@host> show version
Hostname: router1
Model: m20
JUNOS Base OS boot [7.2-20050312.0]
JUNOS Base OS Software Suite [7.2-20050312.0]
JUNOS Kernel Software Suite [7.2R1.7]
JUNOS Packet Forwarding Engine Support (M20/M40) [7.2R1.7]
JUNOS Routing Software Suite [7.2R1.7]
JUNOS Online Documentation [7.2R1.7]
JUNOS Crypto Software Suite [7.2R1.7]

{master}

user@host> show version psd 1
psd1-re0:
-----
Hostname: china
Model: t640
JUNOS Base OS boot [9.1I20080311_1959_builder]
JUNOS Base OS Software Suite [9.1-20080321.0]
JUNOS Kernel Software Suite [9.1-20080321.0]
JUNOS Crypto Software Suite [9.1-20080321.0]
JUNOS Packet Forwarding Engine Support (M/T Common) [9.1-20080321.0]
JUNOS Packet Forwarding Engine Support (T-series) [9.1-20080321.0]
JUNOS Online Documentation [9.1-20080321.0]
JUNOS Routing Software Suite [9.1-20080321.0]
labpkg [7.0]
```



**show version (TX  
Matrix Plus Router)**

```
user@host> show version
sfc0-re0:
```

```
-----
Hostname: host
Model: tpx
JUNOS Base OS boot [12.3-20121019.0]
JUNOS Base OS Software Suite [12.3-20121019.0]
JUNOS Kernel Software Suite [12.3-20121019.0]
JUNOS Crypto Software Suite [12.3-20121019.0]
JUNOS Packet Forwarding Engine Support (M/T Common) [12.3-20121019.0]
JUNOS Packet Forwarding Engine Support (T-Series) [12.3-20121019.0]
JUNOS Online Documentation [12.3-20121019.0]
JUNOS Services ACL Container package [12.3-20121019.0]
JUNOS Services Application Level Gateways [12.3-20121019.0]
JUNOS AppId Services [12.3-20121019.0]
JUNOS Border Gateway Function package [12.3-20121019.0]
JUNOS Services Captive Portal and Content Delivery Container package
[12.3-20121019.0]
JUNOS Services HTTP Content Management package [12.3-20121019.0]
JUNOS IDP Services [12.3-20121019.0]
JUNOS Services LL-PDF Container package [12.3-20121019.0]
JUNOS Services NAT [12.3-20121019.0]
JUNOS Services PTSP Container package [12.3-20121019.0]
JUNOS Services RPM [12.3-20121019.0]
JUNOS Services Stateful Firewall [12.3-20121019.0]
JUNOS Voice Services Container package [12.3-20121019.0]
JUNOS Services Example Container package [12.3-20121019.0]
JUNOS Services Crypto [12.3-20121019.0]
JUNOS Services SSL [12.3-20121019.0]
JUNOS Services IPSec [12.3-20121019.0]
JUNOS Runtime Software Suite [12.3-20121019.0]
JUNOS Routing Software Suite [12.3-20121019.0]
```

```
lcc0-re0:
```

```
-----
Hostname: host1
Model: t1600
JUNOS Base OS boot [12.3-20121019.0]
JUNOS Base OS Software Suite [12.3-20121019.0]
JUNOS Kernel Software Suite [12.3-20121019.0]
JUNOS Crypto Software Suite [12.3-20121019.0]
JUNOS Packet Forwarding Engine Support (M/T Common) [12.3-20121019.0]
JUNOS Packet Forwarding Engine Support (T-Series) [12.3-20121019.0]
JUNOS Online Documentation [12.3-20121019.0]
JUNOS Services ACL Container package [12.3-20121019.0]
JUNOS Services Application Level Gateways [12.3-20121019.0]
JUNOS AppId Services [12.3-20121019.0]
JUNOS Border Gateway Function package [12.3-20121019.0]
JUNOS Services Captive Portal and Content Delivery Container package
[12.3-20121019.0]
JUNOS Services HTTP Content Management package [12.3-20121019.0]
JUNOS IDP Services [12.3-20121019.0]
JUNOS Services LL-PDF Container package [12.3-20121019.0]
JUNOS Services NAT [12.3-20121019.0]
JUNOS Services PTSP Container package [12.3-20121019.0]
JUNOS Services RPM [12.3-20121019.0]
JUNOS Services Stateful Firewall [12.3-20121019.0]
JUNOS Voice Services Container package [12.3-20121019.0]
JUNOS Services Example Container package [12.3-20121019.0]
JUNOS Services Crypto [12.3-20121019.0]
JUNOS Services SSL [12.3-20121019.0]
```



```
JUNOS Services IPSec [12.3-20121019.0]
JUNOS Runtime Software Suite [12.3-20121019.0]
JUNOS Routing Software Suite [12.3-20121019.0]
```

```
lcc1-re0:
```

```
-----
Hostname: host2
Model: t1600
JUNOS Base OS boot [12.3-20121019.0]
JUNOS Base OS Software Suite [12.3-20121019.0]
JUNOS Kernel Software Suite [12.3-20121019.0]
JUNOS Crypto Software Suite [12.3-20121019.0]
JUNOS Packet Forwarding Engine Support (M/T Common) [12.3-20121019.0]
JUNOS Packet Forwarding Engine Support (T-Series) [12.3-20121019.0]
JUNOS Online Documentation [12.3-20121019.0]
JUNOS Services AACL Container package [12.3-20121019.0]
JUNOS Services Application Level Gateways [12.3-20121019.0]
JUNOS AppId Services [12.3-20121019.0]
JUNOS Border Gateway Function package [12.3-20121019.0]
JUNOS Services Captive Portal and Content Delivery Container package
[12.3-20121019.0]
JUNOS Services HTTP Content Management package [12.3-20121019.0]
JUNOS IDP Services [12.3-20121019.0]
JUNOS Services LL-PDF Container package [12.3-20121019.0]
JUNOS Services NAT [12.3-20121019.0]
JUNOS Services PTSP Container package [12.3-20121019.0]
JUNOS Services RPM [12.3-20121019.0]
JUNOS Services Stateful Firewall [12.3-20121019.0]
JUNOS Voice Services Container package [12.3-20121019.0]
JUNOS Services Example Container package [12.3-20121019.0]
JUNOS Services Crypto [12.3-20121019.0]
JUNOS Services SSL [12.3-20121019.0]
JUNOS Services IPSec [12.3-20121019.0]
JUNOS Runtime Software Suite [12.3-20121019.0]
JUNOS Routing Software Suite [12.3-20121019.0]
```

```
lcc2-re0:
```

```
-----
Hostname: host3
Model: t1600
JUNOS Base OS boot [12.3-20121019.0]
JUNOS Base OS Software Suite [12.3-20121019.0]
JUNOS Kernel Software Suite [12.3-20121019.0]
JUNOS Crypto Software Suite [12.3-20121019.0]
JUNOS Packet Forwarding Engine Support (M/T Common) [12.3-20121019.0]
JUNOS Packet Forwarding Engine Support (T-Series) [12.3-20121019.0]
JUNOS Online Documentation [12.3-20121019.0]
JUNOS Services AACL Container package [12.3-20121019.0]
JUNOS Services Application Level Gateways [12.3-20121019.0]
JUNOS AppId Services [12.3-20121019.0]
JUNOS Border Gateway Function package [12.3-20121019.0]
JUNOS Services Captive Portal and Content Delivery Container package
[12.3-20121019.0]
JUNOS Services HTTP Content Management package [12.3-20121019.0]
JUNOS IDP Services [12.3-20121019.0]
JUNOS Services LL-PDF Container package [12.3-20121019.0]
JUNOS Services NAT [12.3-20121019.0]
JUNOS Services PTSP Container package [12.3-20121019.0]
JUNOS Services RPM [12.3-20121019.0]
JUNOS Services Stateful Firewall [12.3-20121019.0]
JUNOS Voice Services Container package [12.3-20121019.0]
```



```
JUNOS Services Example Container package [12.3-20121019.0]
JUNOS Services Crypto [12.3-20121019.0]
JUNOS Services SSL [12.3-20121019.0]
JUNOS Services IPSec [12.3-20121019.0]
JUNOS Runtime Software Suite [12.3-20121019.0]
JUNOS Routing Software Suite [12.3-20121019.0]
```

```
lcc3-re0:
```

```
-----
Hostname: host4
Model: t1600
JUNOS Base OS boot [12.3-20121019.0]
JUNOS Base OS Software Suite [12.3-20121019.0]
JUNOS Kernel Software Suite [12.3-20121019.0]
JUNOS Crypto Software Suite [12.3-20121019.0]
JUNOS Packet Forwarding Engine Support (M/T Common) [12.3-20121019.0]
JUNOS Packet Forwarding Engine Support (T-Series) [12.3-20121019.0]
JUNOS Online Documentation [12.3-20121019.0]
JUNOS Services ACL Container package [12.3-20121019.0]
JUNOS Services Application Level Gateways [12.3-20121019.0]
JUNOS AppId Services [12.3-20121019.0]
JUNOS Border Gateway Function package [12.3-20121019.0]
JUNOS Services Captive Portal and Content Delivery Container package
[12.3-20121019.0]
JUNOS Services HTTP Content Management package [12.3-20121019.0]
JUNOS IDP Services [12.3-20121019.0]
JUNOS Services LL-PDF Container package [12.3-20121019.0]
JUNOS Services NAT [12.3-20121019.0]
JUNOS Services PTSP Container package [12.3-20121019.0]
JUNOS Services RPM [12.3-20121019.0]
JUNOS Services Stateful Firewall [12.3-20121019.0]
JUNOS Voice Services Container package [12.3-20121019.0]
JUNOS Services Example Container package [12.3-20121019.0]
JUNOS Services Crypto [12.3-20121019.0]
JUNOS Services SSL [12.3-20121019.0]
JUNOS Services IPSec [12.3-20121019.0]
JUNOS Runtime Software Suite [12.3-20121019.0]
JUNOS Routing Software Suite [12.3-20121019.0]
```

#### show version (MX Series Router)

```
user@host5> show version
Hostname: host5
Model: mx80
JUNOS Base OS boot [11.3-20110717.0]
JUNOS Base OS Software Suite [11.3-20110717.0]
JUNOS Kernel Software Suite [11.3-20110717.0]
JUNOS Crypto Software Suite [11.3-20110717.0]
JUNOS Packet Forwarding Engine Support (MX80) [11.3-20110717.0]
JUNOS Online Documentation [11.3-20110717.0]
JUNOS Routing Software Suite [11.3-20110717.0]
```

#### show version (QFX3500 Switch)

```
user@switch> show version
Hostname: switch
Model: qfx_s3500
JUNOS Base OS boot [11.1R1]
JUNOS Base OS Software Suite [11.1R1]
JUNOS Kernel Software Suite [11.1R1]
JUNOS Crypto Software Suite [11.1R1]
JUNOS Online Documentation [11.1R1]
JUNOS Enterprise Software Suite [11.1R1]
JUNOS Packet Forwarding Engine Support (QFX) [11.1R1]
```



JUNOS Routing Software Suite [11.1R1]

#### show version (QFabric System)

```
user@qfabric> show version
Hostname: qfabric
Model: qfx3000-g
Serial Number: qfsn-0123456789
QFabric System ID: f158527a-f99e-11e0-9fbd-00e081c57cda
JUNOS Base Version [12.2I20111018_0215_dc-builder]
```

#### show version component all (QFabric System)

```
user@switch> show version component all
dg1:
-
Hostname: qfabric
Model: qfx3100
JUNOS Base Version [11.3R1.6]

dg0:
-
Hostname: qfabric
Model: qfx3100
JUNOS Base Version [11.3R1.6]

NW-NG-0:
-
Hostname: qfabric
Model: qfx-jvre
JUNOS Base OS boot [11.3R1.6]
JUNOS Base OS Software Suite [11.3R1.6]
JUNOS Kernel Software Suite [11.3R1.6]
JUNOS Crypto Software Suite [11.3R1.6]
JUNOS Online Documentation [11.3R1.6]
JUNOS Enterprise Software Suite [11.3R1.6]
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3R1.6]
JUNOS Routing Software Suite [11.3R1.6]

FC-0:
-
Hostname: qfabric
Model: qfx-jvre
JUNOS Base OS boot [11.3R1.6]
JUNOS Base OS Software Suite [11.3R1.6]
JUNOS Kernel Software Suite [11.3R1.6]
JUNOS Crypto Software Suite [11.3R1.6]
JUNOS Online Documentation [11.3R1.6]
JUNOS Enterprise Software Suite [11.3R1.6]
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3R1.6]
JUNOS Routing Software Suite [11.3R1.6]

FC-1:
Hostname: qfabric
Model: qfx-jvre
JUNOS Base OS boot [11.3R1.6]
JUNOS Base OS Software Suite [11.3R1.6]
JUNOS Kernel Software Suite [11.3R1.6]
JUNOS Crypto Software Suite [11.3R1.6]
JUNOS Online Documentation [11.3R1.6]
JUNOS Enterprise Software Suite [11.3R1.6]
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3R1.6]
JUNOS Routing Software Suite [11.3R1.6]
```



DRE-0:

-

Hostname: dre-0

Model: qfx-jvre

JUNOS Base OS boot [11.3R1.6]

JUNOS Base OS Software Suite [11.3R1.6]

JUNOS Kernel Software Suite [11.3R1.6]

JUNOS Crypto Software Suite [11.3R1.6]

JUNOS Online Documentation [11.3R1.6]

JUNOS Enterprise Software Suite [11.3R1.6]

JUNOS Packet Forwarding Engine Support (QFX RE) [11.3R1.6]

JUNOS Routing Software Suite [11.3R1.6]

FM-0:

-

Hostname: qfabric

Model: qfx-jvre

JUNOS Base OS boot [11.3R1.6]

JUNOS Base OS Software Suite [11.3R1.6]

JUNOS Kernel Software Suite [11.3R1.6]

JUNOS Crypto Software Suite [11.3R1.6]

JUNOS Online Documentation [11.3R1.6]

JUNOS Enterprise Software Suite [11.3R1.6]

JUNOS Packet Forwarding Engine Support (QFX RE) [11.3R1.6]

JUNOS Routing Software Suite [11.3R1.6]

nodedevice1:

-

Hostname: qfabric

Model: QFX3500

JUNOS Base OS boot [11.3R1.6]

JUNOS Base OS Software Suite [11.3R1.6]

JUNOS Kernel Software Suite [11.3R1.6]

JUNOS Crypto Software Suite [11.3R1.6]

JUNOS Online Documentation [11.3R1.6]

JUNOS Enterprise Software Suite [11.3R1.6]

JUNOS Packet Forwarding Engine Support (QFX RE) [11.3R1.6]

JUNOS Routing Software Suite [11.3R1.6]

interconnectdevice1:

-

Hostname: qfabric

Model: QFX3108

JUNOS Base OS boot [11.3R1.6]

JUNOS Base OS Software Suite [11.3R1.6]

JUNOS Kernel Software Suite [11.3R1.6]

JUNOS Crypto Software Suite [11.3R1.6]

JUNOS Online Documentation [11.3R1.6]

JUNOS Enterprise Software Suite [11.3R1.6]


JUNOS Packet Forwarding Engine Support (QFX RE) [11.3R1.6]

JUNOS Routing Software Suite [11.3R1.6]

warning: from interconnectdevice0: Disconnected



## start shell

<b>Syntax</b>	start shell (csh   sh) <user <i>username</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Exit from the CLI environment and create a UNIX-level shell. To return to the CLI, type <b>exit</b> from the shell.
<div>  <p><b>NOTE:</b></p> <ul style="list-style-type: none"> <li>To issue this command, the user must have the required login access privileges configured by including the <b>permissions</b> statement at the [edit system login class <i>class-name</i>] hierarchy level.</li> <li>UNIX wheel group membership or permissions are no longer required to issue this command.</li> </ul> </div>	
<b>Options</b>	<p><b>csh</b>—Create a UNIX C shell.</p> <p><b>sh</b>—Create a UNIX Bourne shell.</p> <p><b>user <i>username</i></b>—(Optional) Start the shell as another user.</p>
<b>Additional Information</b>	<p>When you are in the shell, the shell prompt has the following format:</p> <p><i>username@hostname%</i></p> <p>An example of the prompt is:</p> <p><b>root@host%</b></p>
<b>Required Privilege Level</b>	shell and maintenance
<b>List of Sample Output</b>	<a href="#">start shell csh on page 1094</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.



## Sample Output

### start shell csh

```
user@host> start shell csh
%
```

```
exit
%
```

```
username@hostname% start shell sh
%
```

```
exit
user@host>
```



## test configuration

<b>Syntax</b>	<code>test configuration filename</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Verify that the syntax of a configuration file is correct. If the configuration contains any syntax or commit check errors, a message is displayed to indicate the line number and column number in which the error was found.
<b>Options</b>	<b>filename</b> —Name of the configuration file.  <b>syntax-only</b> —Check the syntax of a partial configuration file, without checking for commit errors. This option introduced in Junos OS Release 12.1.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">test configuration on page 1095</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

```
test configuration      user@host> test configuration terminal
                        [Type ^D to end input]
                        system {
                        host-name bluesky;
                        paris-23;
                        login;
                        }
                        terminal:3:(8) syntax error: paris
                        [edit system]
                        'paris-23;'
                        syntax error
                        terminal:4:(11) statement must contain additional statements: ;
                        [edit system login]
                        'login ;'
                        statement must contain additional statements
                        configuration syntax failed
```



## traceroute

---

<b>Syntax</b>	<pre>traceroute <i>host</i> &lt;as-number-lookup&gt; &lt;bypass-routing&gt; &lt;clns&gt; &lt;gateway <i>address</i>&gt; &lt;inet   inet6&gt; &lt;interface <i>interface-name</i>&gt; &lt;logical system <i>logical-system-name</i>&gt; &lt;monitor <i>host</i>&gt; &lt;mpls (<i>ldp FEC address</i>   <i>rsvp label-switched-path-name</i>)&gt; &lt;no-resolve&gt; &lt;propagate-ttl&gt; &lt;routing-instance <i>routing-instance-name</i>&gt; &lt;source <i>source-address</i>&gt; &lt;tos <i>value</i>&gt; &lt;ttl <i>value</i>&gt; &lt;wait <i>seconds</i>&gt;</pre>
<b>Syntax (QFX Series)</b>	<pre>traceroute <i>host</i> &lt;as-number-lookup&gt; &lt;bypass-routing&gt; &lt;gateway <i>address</i>&gt; &lt;inet&gt; &lt;interface <i>interface-name</i>&gt; &lt;monitor <i>host</i>&gt; &lt;no-resolve&gt; &lt;routing-instance <i>routing-instance-name</i>&gt; &lt;source <i>source-address</i>&gt; &lt;tos <i>value</i>&gt; &lt;ttl <i>value</i>&gt; &lt;wait <i>seconds</i>&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>mpls</b> option introduced in Junos OS Release 9.2.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p> <p><b>propagate-ttl</b> option introduced in Junos OS Release 12.1.</p>
<b>Description</b>	Display the route that packets take to a specified network host. Use <b>traceroute</b> as a debugging tool to locate points of failure in a network.
<b>Options</b>	<p><b>host</b>—IP address or name of remote host.</p> <p><b>as-number-lookup</b>—(Optional) Display the autonomous system (AS) number of each intermediate hop on the path from the host to the destination.</p> <p><b>bypass-routing</b>—(Optional) Bypass the normal routing tables and send requests directly to a system on an attached network. If the system is not on a directly attached network, an error is returned. Use this option to display a route to a local system through an interface that has no route through it.</p>



**clns**—(Optional) Trace the route belonging to the Connectionless Network Service (CLNS).

**gateway address**—(Optional) Address of a router or switch through which the route transits.

**inet | inet6**—(Optional) Trace the route belonging to IPv4 or IPv6, respectively.

**interface *interface-name***—(Optional) Name of the interface over which to send packets.

**logical-system *logical-system-name***—(Optional) Perform this operation on all logical systems or on a particular logical system.

**monitor *host***—(Optional) Display real-time monitoring information for the specified host.

**mpls (*ldp FEC address | rsvp label-switched-path name*)**—(Optional) See **traceroute mpls ldp** and **traceroute mpls rsvp**.

**no-resolve**—(Optional) Do not attempt to determine the hostname that corresponds to the IP address.

**propagate-ttl**—(Optional) On the PE router, use this option to view locally generated Routing Engine transit traffic. This is applicable for MPLS L3VPN traffic only. Use for troubleshooting, when you want to view hop-by-hop information from the local provider router to the remote provider router, when TTL decrementing is disabled on the core network using the **no-propagate-ttl** configuration statement.



**NOTE:** Using **propagate-ttl** with **traceroute** on the CE router does not show hop-by-hop information.

**routing-instance *routing-instance-name***—(Optional) Name of the routing instance for the traceroute attempt.

**source *source-address***—(Optional) Source address of the outgoing traceroute packets.

**tos *value***—(Optional) Value to include in the IP type-of-service (ToS) field. The range of values is 0 through 255.

**ttl *value***—(Optional) Maximum time-to-live value to include in the traceroute request. The range of values is 0 through 128.

**wait *seconds***—(Optional) Maximum time to wait for a response to the traceroute request.

**Required Privilege Level** network

**Related Documentation** • [traceroute monitor on page 1100](#)

**List of Sample Output** [traceroute on page 1099](#)  
[traceroute as-number-lookup host on page 1099](#)



[traceroute no-resolve on page 1099](#)

[traceroute propagate-ttl on page 1099](#)

[traceroute \(Between CE Routers, Layer 3 VPN\) on page 1099](#)

[traceroute \(Through an MPLS LSP\) on page 1099](#)

**Output Fields** [Table 80 on page 1098](#) describes the output fields for the **traceroute** command. Output fields are listed in the approximate order in which they appear.

**Table 80: traceroute Output Fields**

Field Name	Field Description
<b>traceroute to</b>	IP address of the receiver.
<b>hops max</b>	Maximum number of hops allowed.
<b>byte packets</b>	Size of packets being sent.
<i>number-of-hops</i>	Number of hops from the source to the named router or switch.
<i>router-name</i>	Name of the router or switch for this hop.
<i>address</i>	Address of the router or switch for this hop.
<b>Round trip time</b>	Average round-trip time, in milliseconds (ms).



## Sample Output

### traceroute

```
user@host> traceroute santacruz
traceroute to green.company.net (10.156.169.254), 30 hops max, 40 byte packets
 1 blue23 (10.168.1.254) 2.370 ms 2.853 ms 0.367 ms
 2 red14 (10.168.255.250) 0.778 ms 2.937 ms 0.446 ms
 3 yellow (10.156.169.254) 7.737 ms 89.905 ms 0.834 ms
```

### traceroute as-number-lookup host

```
user@host> traceroute as-number-lookup 10.100.1.1
traceroute to 10.100.1.1 (10.100.1.1), 30 hops max, 40 byte packets
 1 10.39.1.1 (10.39.1.1) 0.779 ms 0.728 ms 0.562 ms
 2 10.39.1.6 (10.39.1.6) [AS 32] 0.657 ms 0.611 ms 0.617 ms
 3 10.100.1.1 (10.100.1.1) [AS 10, 40, 50] 0.880 ms 0.808 ms 0.774 ms
```

### traceroute no-resolve

```
user@host> traceroute santacruz no-resolve
traceroute to green.company.net (10.156.169.254), 30 hops max, 40 byte packets
 1 10.168.1.254 0.458 ms 0.370 ms 0.365 ms
 2 10.168.255.250 0.474 ms 0.450 ms 0.444 ms
 3 10.156.169.254 0.931 ms 0.876 ms 0.862 ms
```

### traceroute propagate-ttl

```
user@host> traceroute propagate-ttl 100.200.2.2 routing-instance VPN-A
traceroute to 100.200.2.2 (100.200.2.2) from 1.1.0.2, 30 hops max, 40 byte packets

 1 1.2.0.2 (1.2.0.2) 2.456 ms 1.753 ms 1.672 ms
   MPLS Label=299776 CoS=0 TTL=1 S=0
   MPLS Label=299792 CoS=0 TTL=1 S=1
 2 1.3.0.2 (1.3.0.2) 1.213 ms 1.225 ms 1.166 ms
   MPLS Label=299792 CoS=0 TTL=1 S=1
 3 100.200.2.2 (100.200.2.2) 1.422 ms 1.521 ms 1.443 ms
```

### traceroute (Between CE Routers, Layer 3 VPN)

```
user@host> traceroute vpn09
traceroute to vpn09.skybank.net (10.255.14.179), 30 hops max, 40
byte packets
 1 10.39.10.21 (10.39.10.21) 0.598 ms 0.500 ms 0.461 ms
 2 10.39.1.13 (10.39.1.13) 0.796 ms 0.775 ms 0.806 ms
   MPLS Label=100006 CoS=0 TTL=1 S=1
 3 vpn09.skybank.net (10.255.14.179) 0.783 ms 0.716 ms 0.686
```

### traceroute (Through an MPLS LSP)

```
user@host> traceroute mpls1
traceroute to 10.168.1.224 (10.168.1.224), 30 hops max, 40 byte packets
 1 mpls1-sr0.company.net (10.168.200.101) 0.555 ms 0.393 ms 0.367 ms
   MPLS Label=1024 CoS=0 TTL=1
 2 mpls5-lo0.company.net (10.168.1.224) 0.420 ms 0.394 ms 0.401 ms
```



## traceroute monitor

---

<b>Syntax</b>	<code>traceroute monitor <i>host</i></code> <code>&lt;count <i>value</i>&gt;</code> <code>&lt;inet   inet 6&gt;</code> <code>&lt;interval <i>seconds</i>&gt;</code> <code>&lt;no resolve&gt;</code> <code>&lt;size <i>value</i>&gt;</code> <code>&lt;source <i>source-address</i>&gt;</code> <code>&lt;summary&gt;</code>
<b>Syntax (QFX Series)</b>	<code>traceroute monitor <i>host</i></code> <code>&lt;count <i>value</i>&gt;</code> <code>&lt;inet&gt;</code> <code>&lt;interval <i>seconds</i>&gt;</code> <code>&lt;no resolve&gt;</code> <code>&lt;size <i>value</i>&gt;</code> <code>&lt;source <i>source-address</i>&gt;</code> <code>&lt;summary&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 8.0 Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display live monitoring of each hop in the route that packets take to a specified network host. Use as a debugging tool to locate points of failure in a network.
<b>Options</b>	<p><b><i>host</i></b>—IP address or name of remote host.</p> <p><b><i>count value</i></b>—Number of ping requests, in packets, to send in summary mode. The default value is <b>10</b>.</p> <p><b><i>inet   inet6</i></b>—(Optional) Trace the route belonging to IPv4 or IPv6, respectively.</p> <p><b><i>interval seconds</i></b>—(Optional) Number of seconds to wait before sending ping requests. The default value is <b>1</b>.</p> <p><b><i>no resolve</i></b>—(Optional) Do not attempt to display addresses symbolically.</p> <p><b><i>size value</i></b>—(Optional) Receive the specified number of bytes for each packet. The range is <b>0</b> through <b>65468</b> bytes. The default value is <b>64</b>.</p> <p><b><i>source source-address</i></b>—(Optional) Source address of the outgoing ping packets.</p> <p><b><i>summary</i></b>—(Optional) Generate and display a summary of live monitoring of each hop on the route that packets take to a specified network host.</p>
<b>Required Privilege Level</b>	network
<b>List of Sample Output</b>	<a href="#">traceroute monitor on page 1101</a>
<b>Output Fields</b>	<a href="#">Table 81 on page 1101</a> describes the output fields for the <b>traceroute monitor</b> command. Output fields are listed in the approximate order in which they appear.



Table 81: traceroute monitor Output Fields

Field Name	Field Description
<b>Host</b>	Hostname or IP address of the router at each hop.
<b>Loss%</b>	Percent of packet loss. The number of ping responses divided by the number of ping requests, specified as a percentage.
<b>Snt</b>	Number of ping requests sent to the router at this hop.
<b>Last</b>	Most recent round-trip time, in milliseconds, to the router at this hop.
<b>Avg</b>	Average round-trip time, in milliseconds, to the router at this hop.
<b>Best</b>	Shortest round-trip time, in milliseconds, to the router at this hop.
<b>Wrst</b>	Longest round-trip time, in milliseconds, to the router at this hop.
<b>StDev</b>	Standard deviation of round-trip times, in milliseconds, to the router at this hop.

## Sample Output

### traceroute monitor

```
user@host> traceroute monitor 10.16.0.1
```

	Loss%	Snt	Last	Avg	Best	Wrst	StDev
Host							
1. 10.17.41.254	0.0%	17	0.7	1.0	0.6	5.4	1.2
2. secret.net	0.0%	17	0.6	1.0	0.6	6.6	1.4
3. top-secret.net	0.0%	17	0.6	0.6	0.6	0.6	0.0







## CHAPTER 7

# Troubleshooting

- [Troubleshooting Procedures on page 1103](#)

### Troubleshooting Procedures

---

- [Rebooting and Halting a QFX Series Product on page 1103](#)
- [Recovering from a Failed Software Installation on page 1104](#)
- [Recovering the Root Password on page 1105](#)
- [Troubleshooting Network Interfaces on page 1106](#)
- [Troubleshooting an Aggregated Ethernet Interface on page 1107](#)

### Rebooting and Halting a QFX Series Product

To reboot the switch, issue the **request system reboot** command.

```
user@switch> request system reboot ?
Possible completions:
<[Enter]>      Execute this command
at             Time at which to perform the operation
in            Number of minutes to delay before operation
media         Boot media for next boot
message       Message to display to all users
|            Pipe through a command

user@switch> request system reboot
Reboot the system ? [yes,no] (no) yes
Rebooting switch
```

Similarly, to halt the switch, issue the **request system halt** command.



**CAUTION:** Before entering this command, you must have access to the switch's console port in order to bring up the Routing Engine.

```
user@switch> request system halt ?
Possible completions:
<[Enter]>      Execute this command
at             Time at which to perform the operation
in            Number of minutes to delay before operation
media         Boot media for next boot
message       Message to display to all users
|            Pipe through a command
```





**NOTE:** When you issue this command on an individual component in a QFabric system, you will receive a warning that says “Hardware-based members will halt, Virtual Junos Routing Engines will reboot.” If you want to halt only one member, use the `member` option. You cannot issue this command from the QFabric CLI.

Issuing the `request system halt` command on the switch halts the Routing Engine. To reboot a Routing Engine that has been halted, you must connect through the console.

**Related  
Documentation**

- [clear system reboot on page 290](#)
- [request system reboot on page 344](#)
- [request system halt on page 331](#)
- [request system power-off on page 340](#)
- [Connecting a QFX Series Device to a Management Console](#)

## Recovering from a Failed Software Installation

**Problem** If the Junos OS appears to have been installed but the CLI does not work, or if the switch has no software installed, you can use this recovery installation procedure to install the Junos OS.

**Solution** If a Junos OS image already exists on the switch, you can either install the new Junos OS package in a separate partition, in which case both Junos OS images remain on the switch, or you can remove the existing Junos OS image before you start the new installation process.

To perform a recovery installation:

1. Power on the switch. The loader script starts.
2. After the message `Loading /boot/defaults/loader.conf` appears, you are prompted with the following message:

**Hit [Enter] to boot immediately, or space bar for command prompt.**

Press the Spacebar to enter the manual loader. The `loader>` prompt appears.

3. Enter the following command:

```
loader> install [--format] [--external] source
```

where:

- **format**—Enables you to erase the installation media before installing the installation package. If you do not include this option, the system installs the new Junos OS in a different partition from that of the most recently installed Junos OS.
- **external**—Installs the installation package onto external media (a USB stick, for example).



- **source**—Represents the name and location of the Junos OS package, either on a server on the network or as a file on an external media, as shown in the following two examples:
  - Network address of the server and the path on the server; for example, **tftp://192.171.28/junos/jinstall-qfx-11.1R1.5-domestic-signed.tgz**
  - Junos OS package on a USB device (commonly stored in the root drive as the only file), for example, **file:///jinstall-qfx-11.1R1.5-domestic-signed.tgz**.

The installation now proceeds normally and ends with a login prompt.

## Recovering the Root Password

If you forget the root password for the QFX3500 switch, you can use the password recovery procedure to reset the root password.



**NOTE:** The root password cannot be recovered on a QFabric system.



**NOTE:** You need console access to the switch to recover the root password.

To recover the root password:

1. Power off the switch by switching off the AC power outlet of the device or, if necessary, by pulling the power cords out of the QFX3500 switch power supplies.
2. Turn off the power to the management device, such as a PC or laptop computer, that you want to use to access the CLI.
3. Plug one end of the Ethernet rollover cable supplied with the switch into the RJ-45-to-DB-9 serial port adapter supplied with the switch.
4. Plug the RJ-45-to-DB-9 serial port adapter into the serial port on the management device.
5. Connect the other end of the Ethernet rollover cable to the console port on the switch.
6. Turn on the power to the management device.
7. On the management device, start your asynchronous terminal emulation application (such as Microsoft Windows Hyperterminal) and select the appropriate **COM** port to use (for example, **COM1**).
8. Configure the port settings as follows:
  - Bits per second: 9600
  - Data bits: 8
  - Parity: None



- Stop bits: 1
  - Flow control: None
9. Power on the switch by (if necessary) plugging the power cords into the QFX3500 switch power supply, or turning on the power to the device or switch by switching on the AC power outlet the device is plugged into  
  
The terminal emulation screen on your management device displays the switch's boot sequence.
  10. When the following prompt appears, press the Spacebar to access the switch's bootstrap loader command prompt:  
  
Hit [Enter] to boot immediately, or space bar for command prompt.  
Booting [kernel] in 9 seconds...
  11. At the following prompt, enter **boot -s** to start up the system in single-user mode.  
  
ok **boot -s**
  12. At the following prompt, enter **recovery** to start the root password recovery procedure.  
  
Enter full pathname of shell or 'recovery' for root password recovery or RETURN for /bin/sh: **recovery**
  13. Enter configuration mode in the CLI.
  14. Set the root password. For example:  
  
user@switch# **set system root-authentication plain-text-password**
  15. At the following prompt, enter the new root password. For example:  
  
New password: **juniper1**  
Retype new password:
  16. At the second prompt, reenter the new root password.
  17. After you have finished configuring the password, commit the configuration.  
  
root@host# **commit**  
commit complete
  18. Exit configuration mode in the CLI.
  19. Exit operational mode in the CLI.
  20. At the prompt, enter **y** to reboot the switch.  
  
Reboot the system? [y/n] **y**

**Related  
Documentation**

- [Configuring the Root Password on page 1222](#)

## Troubleshooting Network Interfaces

### The interface on the port in which an SFP or SFP+ transceiver is installed in an SFP or SFP+ module is down

---

**Problem** The QFX Series has an SFP or SFP+ module installed. The interface on the port in which an SFP or SFP+ transceiver is installed is down.

When you check the status with the CLI command **show interfaces *interface-name***, the disabled port is not listed.



**Cause** By default, the SFP or SFP+ module operates in the 10-Gigabit Ethernet mode and supports only SFP or SFP+ transceivers. The operating mode for the module is incorrectly set.

**Solution** Only SFP or SFP+ transceivers can be installed in SFP or SFP+ modules. You must configure the operating mode of the SFP or SFP+ module to match the type of transceiver you want to use. For SFP+ transceivers, configure 10-Gigabit Ethernet operating mode.

## Troubleshooting an Aggregated Ethernet Interface

**Problem** The `show interfaces terse` command shows that the LAG is down.

**Solution** Check the following:

- Verify that there is no configuration mismatch.
- Verify that all member ports are up.
- Verify that a LAG is part of family ethernet-switching (Layer 2 LAG) or family inet (Layer 3 LAG).
- Verify that the LAG member is connected to the correct LAG at the other end.
- Verify that the LAG members belong to the same switch.

**Related Documentation**

- [Verifying the Status of a LAG Interface on page 2124](#)
- [Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch on page 1950](#)







## PART 4

# Configuration and File Management

- [Overview on page 1111](#)
- [Configuration on page 1115](#)
- [Administration on page 1149](#)
- [Troubleshooting on page 1177](#)







## CHAPTER 8

# Overview

- [Configuration Files Overview on page 1111](#)
- [Software Overview on page 1112](#)

## Configuration Files Overview

---

- [Configuration File Terms on page 1111](#)

## Configuration File Terms

[Table 18 on page 30](#) lists the various configuration file terms used for the QFX Series and their definitions.

**Table 82: Configuration File Terms**

Term	Definition
active configuration	Current committed configuration of a switch.
candidate configuration	Working copy of the configuration that allows users to make configurational changes without causing any operational changes until this copy is committed.
configuration group	Group of configuration statements that can be inherited by the rest of the configuration.
commit a configuration	Check configuration for proper syntax, activate and mark as the current configuration file running on the switching platform.
configuration hierarchy	Junos OS configuration consists of a hierarchy of statements. There are two types of statements: container statements, which contain other statements, and leaf statements, which do not contain other statements. All the container and leaf statements together form the configuration hierarchy.
default configuration	Default configuration contains the initial values set for each configuration parameter when a switch is shipped.
rescue configuration	Well-known configuration that recovers a switch from a configuration that denies management access. You set a current committed configuration to be the rescue configuration through the CLI.
roll back a configuration	Return to a previously committed configuration.



- Related Documentation**
- [Loading a Previous Configuration File on page 1122](#)
  - [Reverting to the Rescue Configuration on page 150](#)
  - [Understanding Configuration Files on page 1113](#)

## Software Overview

---

- [Junos OS Commit Model for Router or Switch Configuration on page 1112](#)
- [Understanding Configuration Files on page 1113](#)
- [Understanding How the Junos Configuration Is Stored on page 1113](#)

### Junos OS Commit Model for Router or Switch Configuration

The router or switch configuration is saved using a commit model: that is, a candidate configuration is modified as desired and then committed to the system. Once a configuration has been committed, the router or switch checks the configuration for syntax errors, and if no errors are found, the configuration is saved as **juniper.conf.gz** and activated. The former active configuration file is saved as the first rollback configuration file (**juniper.conf.1.gz**), and all other rollback configuration files are incremented by 1. For example, **juniper.conf.1.gz** is incremented to **juniper.conf.2.gz**, making it the second rollback configuration file. The router or switch can have a maximum of 49 rollback configurations (1–49) saved on the system.

On the router or switch, the active configuration file and the first three rollback files (**juniper.conf.gz.1**, **juniper.conf.gz.2**, **juniper.conf.gz.3**) are located in the **/config** directory. If the file **rescue.conf.gz** is saved on the system, this file should also be saved in the **/config** directory. The factory default files are located in the **/etc/config** directory.

There are two mechanisms used to propagate the configurations between Routing Engines within a router or switch:

- Synchronization—Propagates a configuration from one Routing Engine to a second Routing Engine within the same router or switch chassis.



**NOTE:** The QFX3500 switch has only one Routing Engine.

---

To synchronize configurations, use the **commit synchronize** CLI command. If one of the Routing Engines is locked, the synchronization fails. If synchronization fails because of a locked configuration file, you can use the **commit synchronize force** command. This command overrides the lock and synchronizes the configuration files.

- Distribution—Propagates a configuration across the routing plane on a multichassis router or switch. Distribution occurs automatically. There is no user command available to control the distribution process. If a configuration is locked during a distribution of a configuration, the locked configuration does not receive the distributed configuration file, so the synchronization fails. You need to clear the lock before the configuration and resynchronize the routing planes.





**NOTE:** When you use the `commit synchronize force` CLI command on a multichassis platform, the forced synchronization of the configuration files does not affect the distribution of the configuration file across the routing plane. If a configuration file is locked on a router or switch remote from the router or switch where the command was issued, the synchronization fails on the remote router or switch. You need to clear the lock and reissue the `synchronize` command.

- Related Documentation**
- [Configuring Junos OS for the First Time on a Router or Switch with a Single Routing Engine](#)

## Understanding Configuration Files

A configuration file stores the complete configuration of a switch. The current configuration of a switch is called the active configuration. You can alter this current configuration and you can also return to a previous configuration or to a rescue configuration.

Juniper Networks Junos OS saves the 50 most recently committed configuration files on a switch so that you can return to a previous configuration. The configuration files are named:

- `juniper.conf.gz`—The current active configuration.
- `juniper.conf.1.gz` to `juniper.conf.49.gz`—Rollback configurations.

To make changes to the configuration file, you have to work in the configuration mode in the CLI. When making changes to a configuration file, you are viewing and changing the candidate configuration file. The candidate configuration allows you to make configuration changes without causing operational changes to the active configuration or causing potential damage to your current network operations. Once you commit the changes made to the candidate configuration, the system updates the active configuration.

- Related Documentation**
- [Uploading a Configuration File on page 1131](#)
  - [Loading a Previous Configuration File on page 1122](#)
  - [Reverting to the Rescue Configuration on page 150](#)
  - [Configuration File Terms on page 29](#)

## Understanding How the Junos Configuration Is Stored

When you edit a configuration, you work in a copy of the current configuration to create a candidate configuration. The changes you make to the candidate configuration are visible in the CLI immediately, so if multiple users are editing the configuration at the same time, all users can see all changes.



To have a candidate configuration take effect, you *commit* the changes. At this point, the candidate file is checked for proper syntax, activated, and marked as the current, operational software configuration file. If multiple users are editing the configuration, when you commit the candidate configuration, all changes made by all the users take effect.

In addition to saving the current configuration, the CLI saves the current operational version and the previous 49 versions of committed configurations. The most recently committed configuration is version 0, which is the current operational version and the default configuration that the system returns to if you roll back to a previous configuration. The oldest saved configuration is version 49.

The currently operational Junos OS configuration is stored in the file **juniper.conf** and the last three committed configurations are stored in the files **juniper.conf.1**, **juniper.conf.2**, and **juniper.conf.3**. These four files are located in the directory **/config**, which is on the switch's hard disk. The remaining 46 previous versions of committed configurations, the files **juniper.conf.4** through **juniper.conf.49**, are stored in the directory **/var/db/config** on the hard disk.

**Related  
Documentation**

- [Returning to the Most Recently Committed Junos Configuration on page 1122](#)
- [Returning to a Previously Committed Junos OS Configuration on page 1123](#)
- [Loading a Configuration from a File on page 1119](#)



## CHAPTER 9

# Configuration

- [Configuration Tasks on page 1115](#)
- [Configuration Statements on page 1136](#)
- [Default Configurations on page 1140](#)
- [Configuration Examples on page 1146](#)

### Configuration Tasks

---

- [Comparing Configuration Changes with a Prior Version on page 1115](#)
- [Compressing the Current Configuration File on page 1117](#)
- [Creating and Returning to a Rescue Configuration on page 1118](#)
- [Loading a Configuration from a File on page 1119](#)
- [Loading a Previous Configuration File on page 1122](#)
- [Returning to the Most Recently Committed Junos Configuration on page 1122](#)
- [Returning to a Previously Committed Junos OS Configuration on page 1123](#)
- [Reverting to the Default Factory Configuration on page 1128](#)
- [Reverting to the Rescue Configuration on page 1128](#)
- [Rolling Back Junos OS Configuration Changes on page 1129](#)
- [Saving a Configuration to a File on page 1130](#)
- [Setting or Deleting the Rescue Configuration on page 1131](#)
- [Uploading a Configuration File on page 1131](#)
- [Using Junos OS to Configure a Router or Switch to Transfer Its Configuration to an Archive Site on page 1133](#)

### Comparing Configuration Changes with a Prior Version

In configuration mode only, when you have made changes to the configuration and want to compare the candidate configuration with a prior version, you can use the **compare** command to display the configuration. The **compare** command compares the candidate configuration with either the current committed configuration or a configuration file and displays the differences between the two configurations. To compare configurations, specify the **compare** command after the pipe:

[edit]



```
user@host# show | compare (filename| rollback n)
```

**filename** is the full path to a configuration file. The file must be in the proper format: a hierarchy of statements.

**n** is the index into the list of previously committed configurations. The most recently saved configuration is number 0, and the oldest saved configuration is number 49. If you do not specify arguments, the candidate configuration is compared against the active configuration file (`/config/juniper.conf`).

The comparison output uses the following conventions:

- Statements that are only in the candidate configuration are prefixed with a plus sign (+).
- Statements that are only in the comparison file are prefixed with a minus sign (-).
- Statements that are unchanged are prefixed with a single blank space ( ).

The following example shows various changes, then a comparison of the candidate configuration with the active configuration, showing only the changes made at the **[edit protocols bgp]** hierarchy level:

```
[edit]
user@host# edit protocols bgp
[edit protocols bgp]
user@host# show
group my-group {
    type internal;
    hold-time 60;
    advertise-inactive;
    allow 1.1.1.1/32;
}
group fred {
    type external;
    peer-as 33333;
    allow 2.2.2.2/32;
}
group test-peers {
    type external;
    allow 3.3.3.3/32;
}
[edit protocols bgp]
user@host# set group my-group hold-time 90
[edit protocols bgp]
user@host# delete group my-group advertise-inactive
[edit protocols bgp]
user@host# set group fred advertise-inactive
[edit protocols bgp]
user@host# delete group test-peers
[edit protocols bgp]
user@host# show | compare
[edit protocols bgp group my-group]
-hold-time 60;
+hold-time 90;
-advertise-inactive;
```



```
[edit protocols bgp group fred]
+advertise-inactive;
[edit protocols bgp]
-group test-peers {
  -type external;
  -allow 3.3.3.3/32;
}
[edit protocols bgp]
user@host# show
group my-group {
  type internal;
  hold-time 90;
  allow 1.1.1.1/32;
}
group fred {
  type external;
  advertise-inactive;
  peer-as 3333;
  allow 2.2.2.2/32;
}
```

#### Related Documentation

- [Creating and Returning to a Rescue Configuration on page 1118](#)

## Compressing the Current Configuration File

By default, the current operational configuration file is compressed, and is stored in the file **juniper.conf.gz**, in the **/config** file system, along with the last three committed versions of the configuration. If you have large networks, the current configuration file might exceed the available space in the **/config** file system. Compressing the current configuration file enables the file to fit in the file system, typically reducing the size of the file by 90 percent. You might want to compress your current operation configuration files when they reach 3 megabytes (MB) in size.

When you compress the current configuration file, the names of the configuration files change. To determine the size of the files in the **/config** file system, issue the **file list /config detail** command.



**NOTE:** We recommend that you compress the configuration files (this is the default) to minimize the amount of disk space that they require.

- If you want to compress the current configuration file, include the **compress-configuration-files** statement at the **[edit system]** hierarchy level:

```
[edit system]
compress-configuration-files;
```

Commit the current configuration file to include the **compression-configuration-files** statement. Commit the configuration again to compress the current configuration file:

```
[edit system]
user@host# set compress-configuration-files
```



```
user@host# commit
commit complete
user@host# commit
commit complete
```

- If you do not want to compress the current operational configuration file, include the **no-compress-configuration-files** statement at the **[edit system]** hierarchy level:

```
[edit system]
no-compression-configuration-files;
```

Commit the current configuration file to include the **no-compress-configuration-files** statement. Commit the configuration again to uncompress the current configuration file:

```
[edit system]
user@host# commit
commit complete
user@host# commit
commit complete
```

**Related  
Documentation**

- [Junos OS Commit Model for Router or Switch Configuration on page 31](#)
- [compress-configuration-files on page 218](#)

## Creating and Returning to a Rescue Configuration

A *rescue configuration* allows you to define a known working configuration or a configuration with a known state that you can roll back to at any time. This alleviates the necessity of having to remember the rollback number with the **rollback** command. You use the rescue configuration when you need to roll back to a known configuration or as a last resort if your router or switch configuration and the backup configuration files become damaged beyond repair.

To save the most recently committed configuration as the rescue configuration so that you can return to it at any time, issue the **request system configuration rescue save** command:

```
user@host> request system configuration rescue save
```

To return to the rescue configuration, use the **rollback rescue** configuration mode command:

```
[edit]
user@host# rollback rescue
load complete
```



**NOTE:** If the rescue configuration does not exist, or if the rescue configuration is not a complete, viable configuration, the **rollback** command fails, an error message appears, and the current configuration remains active.

To activate the rescue configuration that you have loaded, use the **commit** command:

```
[edit]
```



```

user@host# rollback rescue
load complete
[edit]
user@host# commit

```

To delete an existing rescue configuration, issue the **request system configuration rescue delete** command:

```

user@host> request system configuration rescue delete
user@host>

```

For more information about the **request system configuration rescue delete** and **request system configuration rescue save** commands, see the Junos OS Operational Mode Commands.

#### Related Documentation

- [Comparing Configuration Changes with a Prior Version on page 1115](#)
- [Saving a Configuration to a File on page 1127](#)

## Loading a Configuration from a File

You can create a file, copy the file to the local router, and then load the file into the CLI. After you have loaded the file, you can commit it to activate the configuration on the router, or you can edit the configuration interactively using the CLI and commit it at a later time.

You can also create a configuration while typing at the terminal and then load it. Loading a configuration from the terminal is generally useful when you are cutting existing portions of the configuration and pasting them elsewhere in the configuration.

To load an existing configuration file that is located on the router, use the **load** configuration mode command:

```

[edit]
user@host# load (factory-default | merge | override | patch | replace | set | update)
filename <relative>

```

For information about specifying the filename, see Viewing Files and Directories on a Device Running Junos OS.

To load a configuration from the terminal, use the following version of the **load** configuration mode command. Type ^D to end input.

```

[edit]
user@host# load (factory-default | merge | override | patch | replace | set | update)
terminal <relative>

```

To replace an entire configuration, specify the **override** option at any level of the hierarchy. A **load override** operation completely replaces the current candidate configuration with the file you are loading. So if you saved a complete configuration, this is the option to use.

An override operation discards the current candidate configuration and loads the configuration in **filename** or the one that you type at the terminal. When you use the



**override** option and commit the configuration, all system processes reparse the configuration. For an example, see [Figure 13 on page 1146](#).

To replace portions of a configuration, specify the **replace** option. The **load replace** operation looks for **replace:** tags that you added to the loaded file, and replaces the parts of the candidate configuration with whatever is specified after the tag. This is useful when you want more control over exactly what is being changed. For this operation to work, you must include **replace:** tags in the file or configuration you type at the terminal. The software searches for the **replace:** tags, deletes the existing statements of the same name, if any, and replaces them with the incoming configuration. If there is no existing statement of the same name, the **replace** operation adds to the configuration the statements marked with the **replace:** tag. For an example, see [Figure 14 on page 1147](#).

If, in an override or merge operation, you specify a file or type text that contains **replace:** tags, the **replace:** tags are ignored and the **override** or **merge** operation is performed.

If you are performing a **replace** operation and the file you specify or text you type does not contain any **replace:** tags, the **replace** operation is effectively equivalent to a **merge** operation. This might be useful if you are running automated scripts and cannot know in advance whether the scripts need to perform a **replace** or a **merge** operation. The scripts can use the **replace** operation to cover either case.

The **load merge** operation adds the saved file to the existing candidate configuration. This is useful if you are adding new configuration sections. For example, if you are adding a BGP configuration to the **[edit protocols]** level, where there was no BGP configuration before. If the existing configuration and the incoming configuration contain conflicting statements, the statements in the incoming configuration override those in the existing configuration.

To replace only the configuration that has changed, specify the **update** option at any level of the hierarchy. The **load update** operation compares the candidate configuration and the file you are loading, and only changes the parts of the candidate configuration that are different from the new configuration. You would use this, for example, if there is an existing BGP configuration and the file you are loading changes it in some way.

To change part of the configuration with a patch file, specify the **patch** option. The **load patch** operation loads a file or terminal input that contains configuration changes. First, on a device that already has the configuration changes, you type the **show | compare** command to output the differences between two configurations. Then you can load the differences on another router. The advantage of the **load patch** command is that it saves you from having to copy snippets from different hierarchy levels into a text file prior to loading them into the target device. This might be a useful time saver if you are configuring several devices with the same options. For example, suppose you configure a routing policy on Device router1 and you want to replicate the policy configuration on Device router2, router3, and router4.

First, run the **show | compare** command.

```
user@router1# show | compare rollback 3
[edit protocols ospf]
+ export default-static;
- export static-default
```



```
[edit policy-options]
+ policy-statement default-static {
+   from protocol static;
+   then accept;
+ }
```

Copy the output of the **show | compare** command to the clipboard, making sure to include the hierarchy levels. On Device router2, router3, and router4, type **load patch terminal** and paste the output. Press Enter and type Ctrl-D to end the operation. If the patch input specifies different values for an existing statement, the patch input overrides the existing statement.

To use the **merge**, **replace**, **set**, or **update** option without specifying the full hierarchy level, specify the **relative** option. For example:

```
[edit system]
user@host# show static-host-mapping
bob sysid 987.654.321ab
[edit system]
user@host# load replace terminal relative
[Type ^D at a new line to end input]
replace: static-host-mapping {
    bob sysid 0123.456.789bc;
}
load complete
[edit system]
user@host# show static-host-mapping
bob sysid 0123.456.789bc;
```

To load a configuration that contains the **set** configuration mode command, specify the **set** option. This option executes the configuration instructions line by line as they are stored in a file or from a terminal. The instructions can contain any configuration mode command, such as **set**, **edit**, **exit**, and **top**. For an example, see [Figure 17 on page 1148](#).

To copy a configuration file from another network system to the local router, you can use the SSH and Telnet utilities, as described in the Junos OS Operational Mode Commands.



**NOTE:** If you are using Junos OS in a Common Criteria environment, system log messages are created whenever a **secret** attribute is changed (for example, password changes or changes to the RADIUS shared secret). These changes are logged during the following configuration load operations:

```
load merge
load replace
load override
load update
```

For more information, see the *Secure Configuration Guide for Common Criteria and Junos-FIPS*.

#### Related Documentation

- [Examples: Loading a Configuration from a File on page 1146](#)



## Loading a Previous Configuration File

You can use the **rollback** <*number*> command to return to a previously committed configuration file. A switch saves the last 50 committed configurations, including the rollback number, date, time, and name of the user who issued the **commit** configuration command.

### Syntax

**rollback** <*number*>

### Options

- **none**—Return to the most recently saved configuration.
- **number**—Configuration to return to.
  - **Range:** 0 through 49. The most recently saved configuration is number 0, and the oldest saved configuration is number 49.
  - **Default:** 0

To return to a configuration prior to the most recently committed one:

1. Specify the rollback number (here, 1 is entered and the configuration returns to the previously committed configuration):

```
[edit]
user@switch# rollback 1
load complete
```

2. Activate the configuration you have loaded:

```
[edit]
user@switch# commit
```

**Related Documentation**

- [Configuration File Terms on page 29](#)

## Returning to the Most Recently Committed Junos Configuration

To return to the most recently committed configuration and load it into configuration mode without activating it, use the **rollback** configuration mode command:

```
[edit]
user@host# rollback

load complete
```

To activate the configuration to which you rolled back, use the **commit** command:

```
[edit]
user@host# rollback
load complete
[edit]
user@host# commit
```



- Related Documentation**
- [Rolling Back Junos OS Configuration Changes on page 1129](#)
  - [Returning to a Previously Committed Junos OS Configuration on page 1123](#)
  - [Understanding How the Junos Configuration Is Stored on page 1113](#)

## Returning to a Previously Committed Junos OS Configuration

This topic explains how you can return to a configuration prior to the most recently committed one, and contains the following sections:

- [Returning to a Configuration Prior to the One Most Recently Committed on page 1123](#)
- [Displaying Previous Configurations on page 1123](#)
- [Comparing Configuration Changes with a Prior Version on page 1124](#)
- [Creating and Returning to a Rescue Configuration on page 1126](#)
- [Saving a Configuration to a File on page 1127](#)

### Returning to a Configuration Prior to the One Most Recently Committed

To return to a configuration prior to the most recently committed one, include the configuration number, 0 through 49, in the **rollback** command. The most recently saved configuration is number 0 (which is the default configuration to which the system returns), and the oldest saved configuration is number 49.

```
[edit]
user@host# rollback number
load complete
```

### Displaying Previous Configurations

To display previous configurations, including the rollback number, date, time, the name of the user who committed changes, and the method of commit, use the **rollback ?** command.

```
[edit]
user@host# rollback ?
Possible completions:
<[Enter]> Execute this command
<number> Numeric argument
0      2005-02-27 12:52:10 PST by abc via cli
1      2005-02-26 14:47:42 PST by def via cli
2      2005-02-14 21:55:45 PST by ghi via cli
3      2005-02-10 16:11:30 PST by jkl via cli
4      2005-02-10 16:02:35 PST by mno via cli
5      2005-03-16 15:10:41 PST by pqr via cli
6      2005-03-16 14:54:21 PST by stu via cli
7      2005-03-16 14:51:38 PST by vwx via cli
8      2005-03-16 14:43:29 PST by yzz via cli
9      2005-03-16 14:15:37 PST by abc via cli
10     2005-03-16 14:13:57 PST by def via cli
11     2005-03-16 12:57:19 PST by root via other
12     2005-03-16 10:45:23 PST by root via other
13     2005-03-16 10:08:13 PST by root via other
```



```
14      2005-03-16 01:20:56 PST by root via other
15      2005-03-16 00:40:37 PST by ghi via cli
16      2005-03-16 00:39:29 PST by jkl via cli
17      2005-03-16 00:32:36 PST by mno via cli
18      2005-03-16 00:31:17 PST by pqr via cli
19      2005-03-15 19:59:00 PST by stu via cli
20      2005-03-15 19:53:39 PST by vwx via cli
21      2005-03-15 18:07:19 PST by yzz via cli
22      2005-03-15 17:59:03 PST by abc via cli
23      2005-03-15 15:05:14 PST by def via cli
24      2005-03-15 15:04:51 PST by ghi via cli
25      2005-03-15 15:03:42 PST by jkl via cli
26      2005-03-15 15:01:52 PST by mno via cli
27      2005-03-15 14:58:34 PST by pqr via cli
28      2005-03-15 13:09:37 PST by root via other
29      2005-03-12 11:01:20 PST by stu via cli
30      2005-03-12 10:57:35 PST by vwx via cli
31      2005-03-11 10:25:07 PST by yzz via cli
32      2005-03-10 23:40:58 PST by abc via cli
33      2005-03-10 23:40:38 PST by def via cli
34      2005-03-10 23:14:27 PST by ghi via cli
35      2005-03-10 23:10:16 PST by jkl via cli
36      2005-03-10 23:01:51 PST by mno via cli
37      2005-03-10 22:49:57 PST by pqr via cli
38      2005-03-10 22:24:07 PST by stu via cli
39      2005-03-10 22:20:14 PST by vwx via cli
40      2005-03-10 22:16:56 PST by yzz via cli
41      2005-03-10 22:16:41 PST by abc via cli
42      2005-03-10 20:44:00 PST by def via cli
43      2005-03-10 20:43:29 PST by ghi via cli
44      2005-03-10 20:39:14 PST by jkl via cli
45      2005-03-10 20:31:30 PST by root via other
46      2005-03-10 18:57:01 PST by mno via cli
47      2005-03-10 18:56:18 PST by pqr via cli
48      2005-03-10 18:47:49 PST by stu via cli
49      2005-03-10 18:47:34 PST by vw via cli
|Pipe through a command
[edit]
```

---

### Comparing Configuration Changes with a Prior Version

In configuration mode only, when you have made changes to the configuration and want to compare the candidate configuration with a prior version, you can use the **compare** command to display the configuration. The **compare** command compares the candidate configuration with either the current committed configuration or a configuration file and displays the differences between the two configurations. To compare configurations, specify the **compare** command after the pipe:

```
[edit]
user@host# show | compare (filename) rollback n)
```

***filename*** is the full path to a configuration file. The file must be in the proper format: a hierarchy of statements.



*n* is the index into the list of previously committed configurations. The most recently saved configuration is number 0, and the oldest saved configuration is number 49. If you do not specify arguments, the candidate configuration is compared against the active configuration file (`/config/juniper.conf`).

The comparison output uses the following conventions:

- Statements that are only in the candidate configuration are prefixed with a plus sign (+).
- Statements that are only in the comparison file are prefixed with a minus sign (-).
- Statements that are unchanged are prefixed with a single blank space ( ).

The following example shows various changes, then a comparison of the candidate configuration with the active configuration, showing only the changes made at the **[edit protocols bgp]** hierarchy level:

```
[edit]
user@host# edit protocols bgp
[edit protocols bgp]
user@host# show
group my-group {
    type internal;
    hold-time 60;
    advertise-inactive;
    allow 1.1.1.1/32;
}
group fred {
    type external;
    peer-as 33333;
    allow 2.2.2.2/32;
}
group test-peers {
    type external;
    allow 3.3.3.3/32;
}
[edit protocols bgp]
user@host# set group my-group hold-time 90
[edit protocols bgp]
user@host# delete group my-group advertise-inactive
[edit protocols bgp]
user@host# set group fred advertise-inactive
[edit protocols bgp]
user@host# delete group test-peers
[edit protocols bgp]
user@host# show | compare
[edit protocols bgp group my-group]
-hold-time 60;
+hold-time 90;
-advertise-inactive;
[edit protocols bgp group fred]
+advertise-inactive;
[edit protocols bgp]
-group test-peers {
```



```
-type external;
-allow 3.3.3.3/32;
}
[edit protocols bgp]
user@host# show
group my-group {
  type internal;
  hold-time 90;
  allow 1.1.1.1/32;
}
group fred {
  type external;
  advertise-inactive;
  peer-as 3333;
  allow 2.2.2.2/32;
}
```

---

### Creating and Returning to a Rescue Configuration

A *rescue configuration* allows you to define a known working configuration or a configuration with a known state that you can roll back to at any time. This alleviates the necessity of having to remember the rollback number with the **rollback** command. You use the rescue configuration when you need to roll back to a known configuration or as a last resort if your router or switch configuration and the backup configuration files become damaged beyond repair.

To save the most recently committed configuration as the rescue configuration so that you can return to it at any time, issue the **request system configuration rescue save** command:

```
user@host> request system configuration rescue save
```

To return to the rescue configuration, use the **rollback rescue** configuration mode command:

```
[edit]
user@host# rollback rescue
load complete
```



**NOTE:** If the rescue configuration does not exist, or if the rescue configuration is not a complete, viable configuration, the rollback command fails, an error message appears, and the current configuration remains active.

To activate the rescue configuration that you have loaded, use the **commit** command:

```
[edit]
user@host# rollback rescue
load complete
[edit]
user@host# commit
```



To delete an existing rescue configuration, issue the **request system configuration rescue delete** command:

```
user@host> request system configuration rescue delete
user@host>
```

For more information about the **request system configuration rescue delete** and **request system configuration rescue save** commands, see the Junos OS Operational Mode Commands.

### Saving a Configuration to a File

Save the Junos OS configuration to a file so that you can edit it with a text editor of your choice. You can save your current configuration to an ASCII file, which saves the configuration in its current form, including any uncommitted changes. If more than one user is modifying the configuration, all changes made by all users are saved.

To save software configuration changes to an ASCII file, use the **save** configuration mode command:

```
[edit]
user@host# save filename
[edit]
user@host#
```

The contents of the current level of the statement hierarchy (and below) are saved, along with the statement hierarchy containing it. This allows a section of the configuration to be saved, while fully specifying the statement hierarchy.

By default, the configuration is saved to a file in your home directory, which is on the flash drive.

When you issue this command from anywhere in the hierarchy (except the top level), a **replace** tag is automatically included at the beginning of the file. You can use the **replace** tag to control how a configuration is loaded from a file.

```
user@host> file show /var/home/user/myconf
replace:
protocols {
  bgp {
    disable;
    group int {
      type internal;
    }
  }
  isis {
    disable;
    interface all {
      level 1 disable;
    }
    interface fxp0.0 {
      disable;
    }
  }
  ospf {
```



```
        traffic-engineering;  
        reference-bandwidth 4g;  
        ...  
    }  
}
```

**Related  
Documentation**

- [Returning to the Most Recently Committed Junos Configuration on page 1122](#)
- [Loading a Configuration from a File on page 1119](#)
- [Viewing Files and Directories on a Device Running Junos OS](#)

## Reverting to the Default Factory Configuration

If for any reason the current active configuration fails, you can revert to the default factory configuration. The default factory configuration contains the basic configuration settings. This is the first configuration of the switch, and it is loaded when the switch is first installed and powered on.

The **load factory default** command is a standard Junos OS configuration command. This configuration command replaces the current active configuration with the default factory configuration.

To revert the switch to the rescue configuration:

1. 

```
[edit]  
user@switch# load factory-default  
[edit]  
user@switch# delete system commit factory-settings  
[edit]  
user@switch# commit
```

**Related  
Documentation**

- [Understanding Configuration Files on page 1113](#)
- [Loading a Previous Configuration File on page 1122](#)
- [Reverting to the Rescue Configuration on page 150](#)

## Reverting to the Rescue Configuration

If someone inadvertently commits a configuration that denies management access to a QFX Series product and the console port is not accessible, you can overwrite the invalid configuration and replace it with the rescue configuration. The rescue configuration is a previously committed, valid configuration.

To revert the switch to the rescue configuration:

1. Enter the **load override** command.  

```
[edit]  
user@switch# load override filename
```
2. Commit your changes.  

```
[edit]
```



```
user@switch# commit filename
```

#### Related Documentation

- [Setting or Deleting the Rescue Configuration on page 1131](#)
- [Reverting to the Default Factory Configuration on page 148](#)
- [Configuration File Terms on page 29](#)

## Rolling Back Junos OS Configuration Changes

This topic shows how to use the **rollback** command to return to the most recently committed Junos OS configuration. The **rollback** command is useful if you make configuration changes and then decide not to keep the changes.

The following procedure shows how to configure an SNMP health monitor on a device running Junos OS and then return to the most recently committed configuration that does not include the health monitor. When configured, the SNMP health monitor provides the network management system (NMS) with predefined monitoring for file system usage, CPU usage, and memory usage on the device.

1. Enter configuration mode:

```
user@host> configure
entering configuration mode
[edit]
user@host#
```

2. Show the current configuration (if any) for SNMP:

```
[edit]
user@host# show snmp
```

No **snmp** statements appear because SNMP has not been configured on the device.

3. Configure the health monitor:

```
[edit]
user@host# set snmp health-monitor
```

4. Show the new configuration:

```
[edit]
user@host# show snmp
health-monitor;
```

The **health-monitor** statement indicates that SNMP health monitoring is configured on the device.

5. Enter the **rollback** configuration mode command to return to the most recently committed configuration:

```
[edit]
user@host# rollback
load complete
```

6. Show the configuration again to make sure your change is no longer present:

```
[edit]
user@host# show snmp
```



No **snmp** configuration statements appear. The health monitor is no longer configured.

7. Enter the **commit** command to activate the configuration to which you rolled back:

```
[edit]
user@host# commit
```

8. Exit configuration mode:

```
[edit]
user@host# exit
Exiting configuration mode
```

You can also use the **rollback** command to return to earlier configurations.

#### Related Documentation

- [Returning to the Most Recently Committed Junos Configuration on page 1122](#)

## Saving a Configuration to a File

Save the Junos OS configuration to a file so that you can edit it with a text editor of your choice. You can save your current configuration to an ASCII file, which saves the configuration in its current form, including any uncommitted changes. If more than one user is modifying the configuration, all changes made by all users are saved.

To save software configuration changes to an ASCII file, use the **save** configuration mode command:

```
[edit]
user@host# save filename
[edit]
user@host#
```

The contents of the current level of the statement hierarchy (and below) are saved, along with the statement hierarchy containing it. This allows a section of the configuration to be saved, while fully specifying the statement hierarchy.

By default, the configuration is saved to a file in your home directory, which is on the flash drive.

When you issue this command from anywhere in the hierarchy (except the top level), a **replace** tag is automatically included at the beginning of the file. You can use the **replace** tag to control how a configuration is loaded from a file.

```
user@host> file show /var/home/user/myconf
replace:
protocols {
  bgp {
    disable;
    group int {
      type internal;
    }
  }
}
isis {
  disable;
  interface all {
```



```

        level 1 disable;
    }
    interface fxp0.0 {
        disable;
    }
}
ospf {
    traffic-engineering;
    reference-bandwidth 4g;
    ...
}
}

```

## Setting or Deleting the Rescue Configuration

A rescue configuration is user-defined configuration that restores connectivity to switch. You set a current committed configuration to be the rescue configuration through the CLI. If someone inadvertently commits a configuration that denies management access to a QFX Series product and the console port is not accessible, you can overwrite the invalid configuration and replace it with the rescue configuration. The rescue configuration is a previously committed, valid configuration. We recommend that the rescue configuration include the IP address (accessible from the network) for the management port.

To set the current active configuration as the rescue configuration:

```
user@switch> request system configuration rescue save
```

To delete an existing rescue configuration:

```
user@switch> request system configuration rescue delete
```

### Related Documentation

- [Reverting to the Default Factory Configuration on page 148](#)
- [Loading a Previous Configuration File on page 1122](#)
- [Configuration File Terms on page 29](#)
- [Junos OS Operational Mode Commands](#)

## Uploading a Configuration File

You can create a configuration file on your local system, copy the file to the switch, and then load the file into the CLI. After you have loaded the configuration file, you can commit it to activate the configuration on the switch. You can also edit the configuration interactively using the CLI and commit it at a later time.

To upload a configuration file from your local system:



1. Create the configuration file using a text editor such as Notepad, making sure that the syntax of the configuration file is correct. For more information about testing the syntax of a configuration file see the *Junos OS System Basics and Services Command Reference* at <http://www.juniper.net/techpubs/software/junos/index.html>.
2. In the configuration text file, use an option to perform the required action when the file is loaded. Table 83 on page 1132 lists and describes some options for the **load** command.

Table 83: Options for the load Command

Options	Description
<b>merge</b>	Combines the current active configuration and the configuration in the filename you specify or the one that you type at the terminal. A <b>merge</b> operation is useful when you are adding a new section to an existing configuration. If the active configuration and the incoming configuration contain conflicting statements, the statements in the incoming configuration override those in the active configuration.
<b>override</b>	Discards the current candidate configuration and loads the configuration in the filename you specify or the one that you type at the terminal. When you use the <b>override</b> option and commit the configuration, all system processes reparse the configuration. You can use the <b>override</b> option at any level of the hierarchy.
<b>replace</b>	Searches for the <b>replace</b> tags, deletes the existing statements of the same name, if any, and replaces them with the incoming configuration. If there is no existing statement of the same name, the <b>replace</b> operation adds the statements marked with the <b>replace</b> tag to the active configuration.  <b>NOTE:</b> For this operation to work, you must include <b>replace</b> tags in the text file or in the configuration you type at the terminal.

3. Press Ctrl+a to select all the text in the configuration file.
4. Press Ctrl+c to copy the contents of the configuration text file to the Clipboard.
5. Log in to the switch using your username and password.
6. To enter configuration mode:  

```
user@switch> configure
```

You will see this output, with the hash or pound mark indicating configuration mode.  
Entering configuration mode  
[edit]  
user@switch#
7. Load the configuration file:  

```
[edit]  
user@switch# load merge terminal
```
8. At the cursor, paste the contents of the Clipboard using the mouse and the Paste icon:  

```
[edit]  
user@switch# load merge terminal  
[Type ^D at a new line to end input]  
>Cursor is here. Paste the contents of the clipboard here<
```



9. Press Enter.
10. Press Ctrl+d to set the end-of-file marker.

To view results of the configuration steps before committing the configuration, type the **show** command at the user prompt.

To commit these changes to the active configuration, type the **commit** command at the user prompt. You can also edit the configuration interactively using the CLI and commit it at a later time.

#### Related Documentation

- [Understanding Configuration Files on page 1113](#)

## Using Junos OS to Configure a Router or Switch to Transfer Its Configuration to an Archive Site

You can configure a router or switch to transfer its configuration to an archive file periodically. The following tasks describe how to transfer the configuration to an archive site:

1. [Configuring the Router or Switch to Transfer Its Currently Active Configuration to an Archive on page 1133](#)
2. [Configuring the Transfer Interval for Periodic Transfer of the Active Configuration to an Archive Site on page 1134](#)
3. [Configuring Transfer of the Current Active Configuration When a Configuration Is Committed on page 1134](#)
4. [Configuring Archive Sites for Transfer of Active Configuration Files on page 1134](#)

### Configuring the Router or Switch to Transfer Its Currently Active Configuration to an Archive

If you want to back up your device's current configuration to an archive site, you can configure the router or switch to transfer its currently active configuration by FTP or secure copy (SCP) periodically or after each commit.

To configure the router or switch to transfer its currently active configuration to an archive site, include statements at the **[edit system archival configuration]** hierarchy level:

```
[edit system archival configuration]
archive-sites {
  ftp://username<:password>@host-address<:port>/url-path;
  scp://username<:password>@host-address<:port>/url-path;
}
transfer-interval interval;
transfer-on-commit;
```



**NOTE:** When specifying a URL in a Junos OS statement using an IPv6 host address, you must enclose the entire URL in quotation marks (") and enclose the IPv6 host address in brackets ([ ]). For example, `"ftp://username<:password>@[ipv6-host-address]<:port>/url-path"`



### Configuring the Transfer Interval for Periodic Transfer of the Active Configuration to an Archive Site

To configure the router or switch to periodically transfer its currently active configuration to an archive site, include the **transfer-interval** statement at the **[edit system archival configuration]** hierarchy level:

```
[edit system archival configuration]
transfer-interval interval;
```

The **interval** is a period of time ranging from 15 through 2880 minutes.

### Configuring Transfer of the Current Active Configuration When a Configuration Is Committed

To configure the router or switch to transfer its currently active configuration to an archive site each time you commit a candidate configuration, include the **transfer-on-commit** statement at the **[edit system archival configuration]** hierarchy level:

```
[edit system archival configuration]
transfer-on-commit;
```



**NOTE:** When specifying a URL in a Junos OS statement using an IPv6 host address, you must enclose the entire URL in quotation marks (") and enclose the IPv6 host address in brackets ([ ]). For example,  
 "scp://username<:password>@[ipv6-host-address]<:port>/url-path"

### Configuring Archive Sites for Transfer of Active Configuration Files

When you configure the router or switch to transfer its configuration files, you specify an archive site to which the files are transferred. If you specify more than one archive site, the router or switch attempts to transfer files to the first archive site in the list, moving to the next site only if the transfer fails.

When you use the **archive-sites** statement, you can specify a destination as an FTP URL, or SCP-style remote file specification. The URL type **file://** is also supported.

To configure the archive site, include the **archive-sites** statement at the **[edit system archival configuration]** hierarchy level:

```
[edit system archival configuration]
archive-sites {
  ftp://username@host:<port>url-path password password;
  scp://username@host:<port>url-path password password;
  file://<path>/<filename>;
}
```



**NOTE:** When specifying a URL in a Junos OS statement using an IPv6 host address, you must enclose the entire URL in quotation marks (") and enclose the IPv6 host address in brackets ([ ]). For example,  
 "scp://username<:password>@[ipv6-host-address]<:port>/url-path"



When you specify the archive site, do not add a forward slash (/) to the end of the URL. The format for the destination filename is as follows:

`<router-name>_juniper.conf[.gz]_YYYYMMDD_HHMMSS`



**NOTE:** The time included in the destination filename is always in Coordinated Universal Time (UTC) regardless of whether the time on the router is configured as UTC or the local time zone. The default time zone on the router or switch is UTC.



## Configuration Statements

### archival

**Syntax**

```

archival {
  configuration {
    archive-sites {
      file://<path>/<filename>;
      ftp://username@host:<port>url-path password password;
      http://username@host:<port>url-path password password;
      pasvftp://username@host:<port>url-path password password;
      scp://username@host:<port>url-path password password;
    }
    transfer-interval interval;
    transfer-on-commit;
  }
}

```

**Hierarchy Level** [edit system]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure copying of the currently active configuration to an archive site. An archive site can be a file, or an FTP or SCP location.



**NOTE:** The edit system archival hierarchy is not available on QFabric systems.

**Options** The remaining statements are explained separately.



**NOTE:** The [edit system archival] hierarchy is not available on QFabric systems.



**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation**

- Using Junos OS to Configure a Router or Switch to Transfer Its Configuration to an Archive Site on page 1133



## archive-sites (Configuration File)

<b>Syntax</b>	<pre>archive-sites {   file://&lt;path&gt;/&lt;filename&gt;;   ftp://username@host:&lt;port&gt;url-path password password;   http://username@host:&lt;port&gt;url-path password password;   pasvftp://username@host:&lt;port&gt;url-path password password;   scp://username@host:&lt;port&gt;url-path password password; }</pre>
<b>Hierarchy Level</b>	[edit system archival configuration]
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>
<b>Description</b>	<p>Specify where to transfer the current configuration files. When specifying a URL in a Junos OS statement using an IPv6 host address, you must enclose the entire URL in quotation marks ( " ") and enclose the IPv6 host address in brackets ( [ ] ). For example,</p> <p><b>"scp://username&lt;:password&gt;@[ipv6-host-address]&lt;:port&gt;/url-path"</b></p> <p>If you specify more than one archive site, the router or switch attempts to transfer the configuration files to the first archive site in the list, moving to the next only if the transfer fails. The format for the destination filename is</p> <p><b>router-name_juniper.conf[.gz]_YYYYMMDD_HHMMSS.</b></p> <div style="margin-top: 20px;">  <p><b>NOTE:</b> The time included in the destination filename is always in Coordinated Universal Time (UTC) regardless of whether the time on the router or switch is configured as UTC or the local time zone. The default time zone on the router or switch is UTC.</p> </div> <div style="margin-top: 20px;">  <p><b>NOTE:</b> The [edit system archival] hierarchy is not available on QFabric systems.</p> </div>
<b>Options</b>	<p>The prefix used in the configuration statement determines the form of transfer:</p> <p><b>file://</b> —transfer on a path to a named file</p> <p><b>ftp://</b> —transfer using active FTP server</p> <p><b>pasvftp://</b> —transfer to a device that only accepts passive FTP services</p> <p><b>scp://</b> —transfer to a known host using background SCP file transfers</p>



<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Archive Sites for Transfer of Active Configuration Files on page 1134</a></li> <li>• <a href="#">configuration on page 1138</a></li> <li>• <a href="#">transfer-on-commit on page 1140</a></li> </ul>

## configuration

**Syntax**

```
configuration {
  transfer-interval interval;
  transfer-on-commit;
  archive-sites {
    file://<path>/<filename>;
    ftp://username@host:<port>url-path password password;
    http://username@host:<port>url-path password password;
    pasvftp://username@host:<port>url-path password password;
    scp://username@host:<port>url-path password password;
  }
}
```

**Hierarchy Level** [edit system archival]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure the router or switch to periodically transfer its currently active configuration (or after each commit).



**NOTE:** The [edit system archival] hierarchy is not available on QFabric systems.

**Options** The remaining statements are explained separately.

**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.

**Related Documentation**

- [Using Junos OS to Configure a Router or Switch to Transfer Its Configuration to an Archive Site on page 1133](#)
- [archive on page 5704](#)
- [archive-sites on page 1137](#)
- [transfer-interval on page 1139](#)
- [transfer-on-commit on page 1140](#)



## transfer-interval (Configuration)

<b>Syntax</b>	<code>transfer-interval <i>interval</i>;</code>
<b>Hierarchy Level</b>	[edit system archival configuration]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the router or switch to periodically transfer its currently active configuration to an archive site.



**NOTE:** The `edit system archival` hierarchy is not available on QFabric systems.

**Options** *interval*—Interval at which to transfer the current configuration to an archive site.  
**Range:** 15 through 2880 minutes



**NOTE:** The `[edit system archival]` hierarchy is not available on QFabric systems.

**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring the Transfer Interval for Periodic Transfer of the Active Configuration to an Archive Site on page 1134](#)
- [archive on page 5704](#)
- [configuration on page 1138](#)
- [transfer-on-commit on page 1140](#)



## transfer-on-commit

<b>Syntax</b>	transfer-on-commit;
<b>Hierarchy Level</b>	[edit system archival configuration]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the router or switch to transfer its currently active configuration to an archive site each time you commit a candidate configuration.



**NOTE:** When specifying a URL in a Junos OS statement using an IPv6 host address, you must enclose the entire URL in quotation marks (") and enclose the IPv6 host address in brackets ([ ]). For example, "ftp://username<:password>@[ipv6-host-address]<:port>/url-path".



**NOTE:** The [edit system archival] hierarchy is not available on QFabric systems.

<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Transfer of the Current Active Configuration When a Configuration Is Committed on page 1134</a></li> <li>• <a href="#">archive on page 5704</a></li> <li>• <a href="#">configuration on page 1138</a></li> <li>• <a href="#">transfer-interval on page 1139</a></li> </ul>

## Default Configurations

- [QFX3500 Switch Default Configuration on page 1140](#)

### QFX3500 Switch Default Configuration

Each QFX Series product is programmed with a factory default configuration that contains the values set for each configuration parameter when a switch is shipped. The default configuration file sets values for system parameters such as **syslog** and **commit**, configures storm control and Ethernet switching on all interfaces, and enables IGMP snooping, RSTP, and LLDP protocols.



When you commit changes to the configuration, a new configuration file is created, which becomes the active configuration. You can always revert to the factory default configuration if you need to.

The following factory default configuration file is for a QFX3500 switch with 48 ports:



**NOTE:** In this example, xe-0/0/0 through xe-0/0/47 are the network interface ports.

```

protocols {
  igmp-snooping {
    vlan all;
  }
  rstp;
  lldp {
    interface all;
  }
}
interfaces {
  xe-0/0/0 {
    unit 0 {
      family ethernet-switching;
    }
  }
  xe-0/0/1 {
    unit 0 {
      family ethernet-switching;
    }
  }
  xe-0/0/2 {
    unit 0 {
      family ethernet-switching;
    }
  }
  xe-0/0/3 {
    unit 0 {
      family ethernet-switching;
    }
  }
  xe-0/0/4 {
    unit 0 {
      family ethernet-switching;
    }
  }
  xe-0/0/5 {
    unit 0 {
      family ethernet-switching;
    }
  }
  xe-0/0/6 {
    unit 0 {
      family ethernet-switching;
    }
  }
}

```



```
}
xe-0/0/7 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/8 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/9 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/10 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/11 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/12 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/13 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/14 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/15 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/16 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/17 {
  unit 0 {
    family ethernet-switching;
  }
}
```



```
xe-0/0/18 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/0/19 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/0/20 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/0/21 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/0/22 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/0/23 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/0/24 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/0/25 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/0/26 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/0/27 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/0/28 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/0/29 {
```



```
        unit 0 {
            family ethernet-switching;
        }
    }
    xe-0/0/30 {
        unit 0 {
            family ethernet-switching;
        }
    }
    xe-0/0/31 {
        unit 0 {
            family ethernet-switching;
        }
    }
    xe-0/0/32 {
        unit 0 {
            family ethernet-switching;
        }
    }
    xe-0/0/33 {
        unit 0 {
            family ethernet-switching;
        }
    }
    xe-0/0/34 {
        unit 0 {
            family ethernet-switching;
        }
    }
    xe-0/0/35 {
        unit 0 {
            family ethernet-switching;
        }
    }
    xe-0/0/36 {
        unit 0 {
            family ethernet-switching;
        }
    }
    xe-0/0/37 {
        unit 0 {
            family ethernet-switching;
        }
    }
    xe-0/0/38 {
        unit 0 {
            family ethernet-switching;
        }
    }
    xe-0/0/39 {
        unit 0 {
            family ethernet-switching;
        }
    }
    xe-0/0/40 {
        unit 0 {
```



```

        family ethernet-switching;
    }
}
xe-0/0/41 {
    unit 0 {
        family ethernet-switching;
    }
}
xe-0/0/42 {
    unit 0 {
        family ethernet-switching;
    }
}
xe-0/0/43 {
    unit 0 {
        family ethernet-switching;
    }
}
xe-0/0/44 {
    unit 0 {
        family ethernet-switching;
    }
}
xe-0/0/45 {
    unit 0 {
        family ethernet-switching;
    }
}
xe-0/0/46 {
    unit 0 {
        family ethernet-switching;
    }
}
xe-0/0/47 {
    unit 0 {
        family ethernet-switching;
    }
}
}
ethernet-switching-options {
    storm-control {
        interface all;
    }
}
system {
    syslog {
        archive size 256k;
        file default-log-messages {
            structured-data;
        }
    }
    user * {
        any emergency;
    }
    file messages {
        any notice;
        authorization info;
    }
}

```



```

    }
    file interactive-commands {
        interactive-commands any;
    }
}
ports {
    console type vt100;
}
compress-configuration-files;
login {
    password {
        minimum-length 6;
        minimum-changes 1;
        change-type set transitions;
        format md5;
    }
}
commit {
    factory-settings {
        reset-chassis-lcd-menu;
    }
}
}

```

#### Related Documentation

- [Reverting to the Default Factory Configuration on page 148](#)
- [Configuring a QFX3500 Device as a Standalone Switch on page 138](#)
- [Understanding Configuration Files on page 1113](#)
- [Interfaces Overview on page 1911](#)

## Configuration Examples

- [Examples: Loading a Configuration from a File on page 1146](#)

### Examples: Loading a Configuration from a File

Figure 13: Overriding the Current Configuration

#### Current configuration:

```

interfaces {
  lo0 {
    unit 0 {
      family inet {
        address 127.0.0.1;
      }
    }
  }
  so-3/0/0 {
    unit 0 {
      family inet {
        address 204.69.248.181/28;
      }
    }
  }
}

```

#### File contents:

```

interfaces {
  replace:
  so-3/0/0 {
    unit 0 {
      family inet {
        address 10.0.0.1/8;
      }
    }
  }
}

```

load override



#### New contents:

```

interfaces {
  so-3/0/0 {
    unit 0 {
      family inet {
        address 10.0.0.1/8;
      }
    }
  }
}

```

1628



Figure 14: Using the replace Option

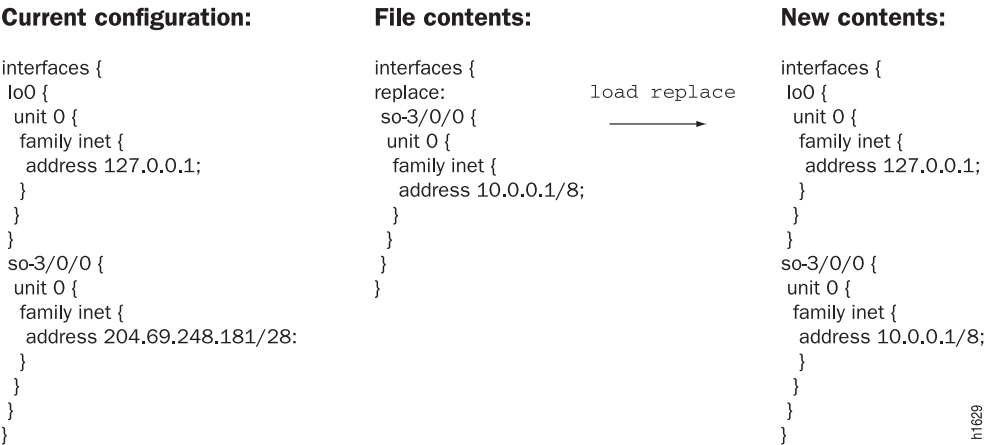


Figure 15: Using the merge Option

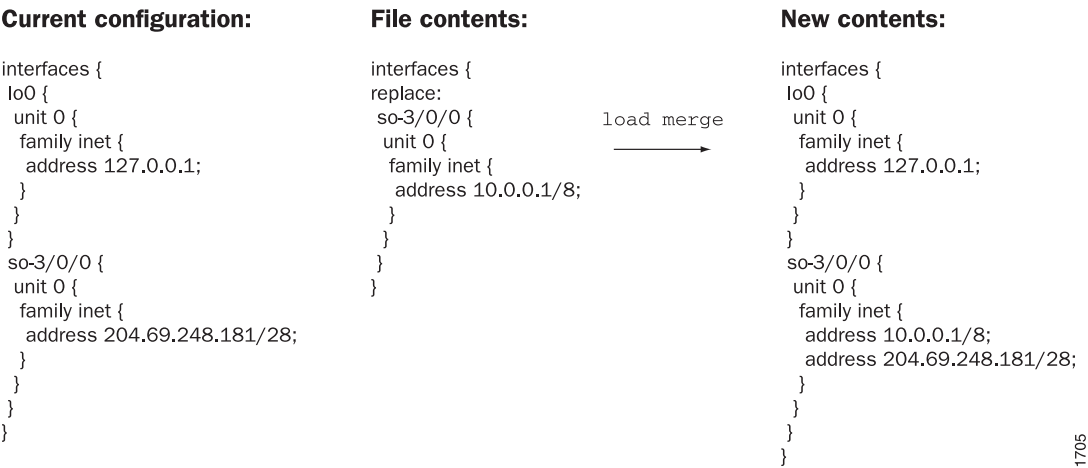




Figure 16: Using a Patch File


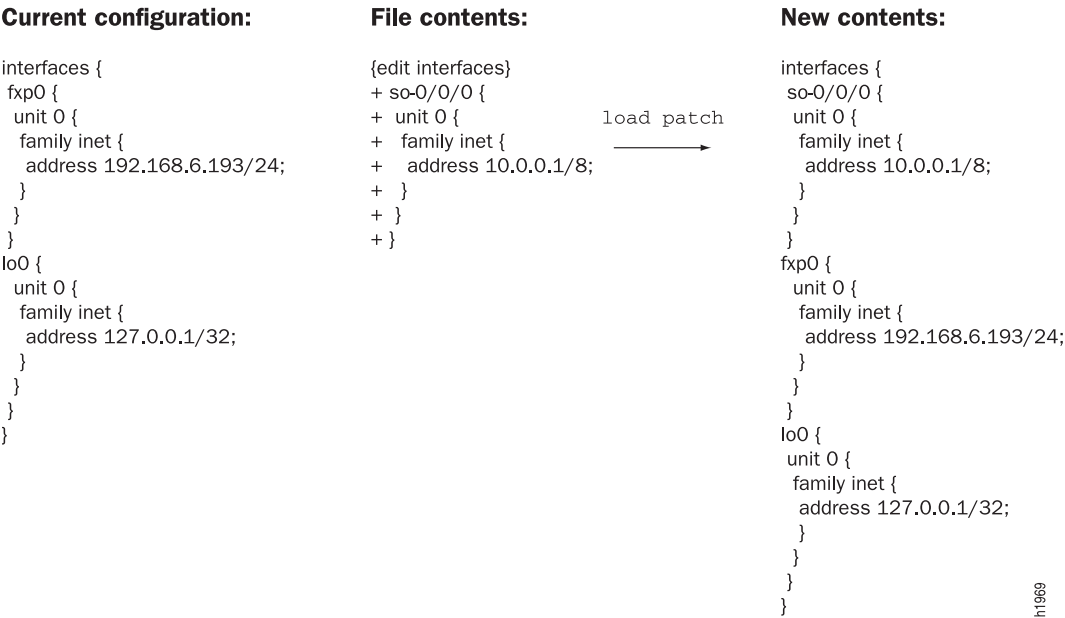


Figure 17: Using the set Option



Related Documentation

- [Loading a Configuration from a File on page 1119](#)

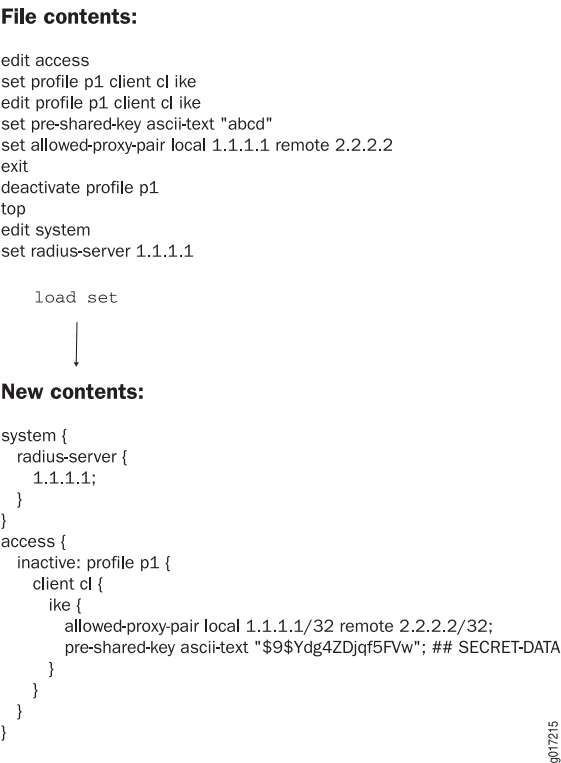

## CHAPTER 10

# Administration

- [Operational Commands on page 1149](#)

### Operational Commands

---



## clear log

---

<b>Syntax</b>	<code>clear log <i>filename</i></code> <code>&lt;all&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Remove contents of a log file.
<b>Options</b>	<b><i>filename</i></b> —Name of the specific log file to delete.  <b>all</b> —(Optional) Delete the specified log file and all archived versions of it.
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show log on page 837</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear log on page 1150</a>
<b>Output Fields</b>	See <a href="#">file list</a> for an explanation of output fields.

## Sample Output

### clear log

The following sample commands list log file information, clear the contents of a log file, and then display the updated log file information:

```
user@host> file list lcc0-re0:/var/log/sampled detail
lcc0-re0:
-----
-rw-r-----  1 root  wheel          26450 Jun 23 18:47 /var/log/sampled
total 1

user@host> clear log lcc0-re0:sampled
lcc0-re0:
-----

user@host> file list lcc0-re0:/var/log/sampled detail
lcc0-re0:
-----
-rw-r-----  1 root  wheel          57 Sep 15 03:44 /var/log/sampled
total 1
```



## clear system commit

---

<b>Syntax</b>	clear system commit
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Clear any pending commit operation.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	maintenance (or the actual user who scheduled the commit)
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show system commit on page 884</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">clear system commit on page 1151</a> <a href="#">clear system commit (None Pending) on page 1151</a> <a href="#">clear system commit (User Does Not Have Required Privilege Level) on page 1151</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

<b>clear system commit</b>	user@host> clear system commit Pending commit cleared.
<b>clear system commit (None Pending)</b>	user@host> clear system commit No commit scheduled.
<b>clear system commit (User Does Not Have Required Privilege Level)</b>	user@host> clear system commit error: Permission denied



## file archive

---

<b>Syntax</b>	<code>file archive destination <i>destination</i> source <i>source</i> &lt;compress&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Archive, and optionally compress, one or multiple local system files as a single file, locally or at a remote location.
<b>Options</b>	<p><b>destination <i>destination</i></b>—Destination of the archived file or files. Specify the destination as a URL or filename. The Junos OS adds one of the following suffixes if the destination filename does not already have it:</p> <ul style="list-style-type: none"><li>• For archived files—The suffix <b>.tar</b></li><li>• For archived and compressed files—The suffix <b>.tgz</b></li></ul> <p><b>source <i>source</i></b>—Source of the original file or files. Specify the source as a URL or filename.</p> <p><b>compress</b>—(Optional) Compress the archived file with the GNU zip (gzip) compression utility. The compressed files have the suffix <b>.tgz</b>.</p>
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">file archive (Multiple Files) on page 1153</a> <a href="#">file archive (Single File) on page 1153</a> <a href="#">file archive (with Compression) on page 1153</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.



## Sample Output

### file archive (Multiple Files)

The following sample command archives all message files in the local directory **/var/log/messages** as the single file **messages-archive.tar**.

```
user@host> file archive source /var/log/messages* destination /var/log/messages-archive.tar
/usr/bin/tar: Removing leading / from absolute path names in the archive.
user@host>
```

### file archive (Single File)

The following sample command archives one message file in the local directory **/var/log/messages** as the single file **messages-archive.tar**.

```
user@host> file archive source /var/log/messages destination /var/log/messages-archive.tar
/usr/bin/tar: Removing leading / from absolute path names in the archive.
user@host
```

### file archive (with Compression)

The following sample command archives and compresses all message files in the local directory **/var/log/messages** as the single file **messages-archive.tgz**.

```
user@host> file archive compress source /var/log/messages* destination
/var/log/messages-archive.tgz
/usr/bin/tar: Removing leading / from absolute path names in the archive.
```



## file checksum md5

---

<b>Syntax</b>	<code>file checksum md5 &lt;pathname&gt; filename</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Calculate the Message Digest 5 (MD5) checksum of a file.
<b>Options</b>	<b>pathname</b> —(Optional) Path to a filename. <b>filename</b> —Name of a local file for which to calculate the MD5 checksum.
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Configuring Checksum Hashes for a Commit Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li><li>• Configuring Checksum Hashes for an Event Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li><li>• Configuring Checksum Hashes for an Op Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li><li>• Executing an Op Script from a Remote Site in the <i>Junos OS Configuration and Operations Automation Guide</i></li><li>• <a href="#">file checksum sha-256 on page 298</a></li><li>• <a href="#">file checksum sha1 on page 297</a></li><li>• op</li></ul>
<b>List of Sample Output</b>	<a href="#">file checksum md5 on page 1154</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

```
file checksum md5      user@host> file checksum md5 jbundle-5.3R2.4-export-signed.tgz
MD5 (jbundle-5.3R2.4-export-signed.tgz) = 2a3b69e43f9bd4893729cc16f505a0f5
```



## file checksum sha1

<b>Syntax</b>	<code>file checksum sha1 &lt;pathname&gt; filename</code>
<b>Release Information</b>	<p>Command introduced in Junos OS Release 9.5.</p> <p>Command introduced in Junos OS Release 9.5 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p>
<b>Description</b>	Calculate the Secure Hash Algorithm (SHA-1) checksum of a file.
<b>Options</b>	<p><b>pathname</b>—(Optional) Path to a filename.</p> <p><b>filename</b>—Name of a local file for which to calculate the SHA-1 checksum.</p>
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Configuring Checksum Hashes for a Commit Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li> <li>• Configuring Checksum Hashes for an Event Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li> <li>• Configuring Checksum Hashes for an Op Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li> <li>• Executing an Op Script from a Remote Site in the <i>Junos OS Configuration and Operations Automation Guide</i></li> <li>• <a href="#">file checksum md5 on page 296</a></li> <li>• <a href="#">file checksum sha-256 on page 298</a></li> <li>• op</li> </ul>
<b>List of Sample Output</b>	<a href="#">file checksum sha1 on page 1155</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

```
file checksum sha1      user@host> file checksum sha1 /var/db/scripts/opscript.slax

SHA1 (/var/db/scripts/commitscript.slax) = ba9e47120c7ce55cff29afd73eacd370e162c676
```



## file checksum sha-256

---

<b>Syntax</b>	<code>file checksum sha-256 &lt;pathname&gt; filename</code>
<b>Release Information</b>	Command introduced in Junos OS Release 9.5. Command introduced in Junos OS Release 9.5 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Calculate the Secure Hash Algorithm 2 family (SHA-256) checksum of a file.
<b>Options</b>	<b>pathname</b> —(Optional) Path to a filename. <b>filename</b> —Name of a local file for which to calculate the SHA-256 checksum.
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Configuring Checksum Hashes for a Commit Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li><li>• Configuring Checksum Hashes for an Event Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li><li>• Configuring Checksum Hashes for an Op Script in the <i>Junos OS Configuration and Operations Automation Guide</i></li><li>• Executing an Op Script from a Remote Site in the <i>Junos OS Configuration and Operations Automation Guide</i></li><li>• <a href="#">file checksum md5 on page 296</a></li><li>• <a href="#">file checksum sha1 on page 297</a></li><li>• op</li></ul>
<b>List of Sample Output</b>	<a href="#">file checksum sha-256 on page 1156</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

```
file checksum sha-256 user@host> file checksum sha-256 /var/db/scripts/commitscript.slax

SHA256 (/var/db/scripts/commitscript.slax) =
94c2b061fb55399e15babd2529453815601a602b5c98e5c12ed929c9d343dd71
```



## file compare

<b>Syntax</b>	<pre>file compare (files <i>filename filename</i>) &lt;context   unified&gt; &lt;ignore-white-space&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p>
<b>Description</b>	<p>Compare two local files and describe the differences between them in default, context, or unified output styles:</p> <ul style="list-style-type: none"> <li>• <b>Default</b>—In the first line of output, <b>c</b> means lines were changed between the two files, <b>d</b> means lines were deleted between the two files, and <b>a</b> means lines were added between the two files. The numbers preceding this alphabetical marker represent the first file, and the lines after the alphabetical marker represent the second file. A left angle bracket (&lt;) in front of output lines refers to the first file. A right angle bracket (&gt;) in front of output lines refers to the second file.</li> <li>• <b>Context</b>—The display is divided into two parts. The first part is the first file; the second part is the second file. Output lines preceded by an exclamation point (!) have changed. Additions are marked with a plus sign (+), and deletions are marked with a minus sign (-).</li> <li>• <b>Unified</b>—The display is preceded by the line number from the first and the second file (xx,xxx,x). Before the line number, additions to the file are marked with a plus sign (+), and deletions to the file are marked with a minus sign (-). The body of the output contains the affected lines. Changes are viewed as additions plus deletions.</li> </ul>
<b>Options</b>	<p><b>files <i>filename</i></b>—Names of two local files to compare.</p> <p><b>context</b>—(Optional) Display output in context format.</p> <p><b>ignore-white-space</b>—(Optional) Ignore changes in the amount of white space.</p> <p><b>unified</b>—(Optional) Display output in unified format.</p>
<b>Required Privilege Level</b>	none
<b>List of Sample Output</b>	<p><a href="#">file compare files on page 1158</a></p> <p><a href="#">file compare files context on page 1158</a></p> <p><a href="#">file compare files unified on page 1158</a></p> <p><a href="#">file compare files unified ignore-white-space on page 1158</a></p>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.



## Sample Output

### file compare files

```
user@host> file compare files /tmp/one /tmp/two
100c100
<          full-name "File 1";
---
>          full-name "File 2";
102c102
<          class foo; # 'foo' is not defined
---
>          class super-user;
```

### file compare files context

```
user@host> file compare files /tmp/one /tmp/two context
*** /tmp/one   Wed Dec  3 17:12:50 2003
--- /tmp/two   Wed Dec  3 09:13:14 2003
*****
*** 97,104 ****
        }
    }
    user bill {
!       full-name "Bill Smith";
!       class foo; # 'foo' is not defined
        authentication {
            encrypted-password SECRET;
        }
--- 97,105 ----
    }
    user bill {
!       full-name "Bill Smith";
!       uid 1089;
!       class super-user;
        authentication {
            encrypted-password SECRET;
        }
    }
```

### file compare files unified

```
user@host> file compare files /tmp/one /tmp/two unified
--- /tmp/one   Wed Dec  3 17:12:50 2003
+++ /tmp/two   Wed Dec  3 09:13:14 2003
@@ -97,8 +97,9 @@
    }
}
user bill {
-   full-name "Bill Smith";
-   class foo; # 'foo' is not defined
+   full-name "Bill Smith";
+   uid 1089;
+   class super-user;
    authentication {
        encrypted-passwordSECRET;
    }
}
```

### file compare files unified ignore-white-space

```
user@host> file compare files /tmp/one /tmp/two unified ignore-white-space
--- /tmp/one   Wed Dec  3 09:13:10 2003
+++ /tmp/two   Wed Dec  3 09:13:14 2003
@@ -99,7 +99,7 @@
    user bill {
```



```
full-name "Bill Smith";  
uid 1089;  
- class foo; # 'foo' is not defined  
+ class super-user;  
  authentication {  
    encrypted-password <SECRET>; # SECRET-DATA  
  }
```



## file delete

---

<b>Syntax</b>	<code>file delete <i>filename</i></code> <code>&lt;purge&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Delete a file on the local router or switch.
<b>Options</b>	<b><i>filename</i></b> —Name of the file to delete. For a routing matrix, include chassis information in the filename if the file to be deleted is not local to the Routing Engine from which the command is issued.  <b><i>purge</i></b> —(Optional) Overwrite regular files before deleting them.
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">file delete on page 1160</a> <a href="#">file delete (Routing Matrix) on page 1160</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

### file delete

```
user@host> file list /var/tmp
dcd.core
rpd.core
snmpd.core

user@host> file delete /var/tmp/snmpd.core
user@host> file list /var/tmp
dcd.core
rpd.core
```

### file delete (Routing Matrix)

```
user@host> file list lcc0-re0:/var/tmp
dcd.core
rpd.core
snmpd.core

user@host> file delete lcc0-re0:/var/tmp/snmpd.core
user@host> file list /var/tmp
dcd.core
rpd.core
```



## file list

---

<b>Syntax</b>	file list <detail   recursive> <filename>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display a list of files on the local router or switch.
<b>Options</b>	<p><b>none</b>—Display a list of all files for the current directory.</p> <p><b>detail   recursive</b>—(Optional) Display detailed output or descend recursively through the directory hierarchy, respectively.</p> <p><b>filename</b>—(Optional) Display a list of files. For a routing matrix, the filename must include the chassis information.</p>
<b>Additional Information</b>	The default directory is the home directory of the user logged in to the router or switch. To view available directories, enter a space and then a backslash (/) after the <b>file list</b> command. To view files within a specific directory, include a backslash followed by the directory and, optionally, subdirectory name after the <b>file list</b> command.
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">file list on page 1162</a> <a href="#">file list (Routing Matrix) on page 1162</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.



## Sample Output

### file list

```
user@host> file list /var/tmp
dcd.core
rpd.core
snmpd.core
```

### file list (Routing Matrix)

```
user@host> file list lcc0-re0:var/tmp
lcc0-re0:
```

```
-----
/var/tmp/:
.gdbinit
.pccardd
Test/
chassisd*
chassisd.nathan*
check_time*
cores/
diagTestPrep*
diagtest*
diagtest.regress*
do_switchovers*
dump_test*
err.manoj.log
esw_clearstats*
esw_counter*
esw_debug*
esw_debug_ge*
esw_filt_test*
esw_filter_tnp_addr*
esw_getstats*
esw_phy*
esw_stats*
```



## file rename

---

<b>Syntax</b>	<code>file rename <i>source destination</i></code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Rename a file on the local router or switch.
<b>Options</b>	<b><i>destination</i></b> —New name for the file.  <b><i>source</i></b> —Original name of the file. For a routing matrix, the filename must include the chassis information.
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">file rename on page 1164</a> <a href="#">file rename (Routing Matrix) on page 1164</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.



## Sample Output

### file rename

The following example lists the files in **/var/tmp**, renames one of the files, and then displays the list of files again to reveal the newly named file.

```
user@host> file list /var/tmp
dcd.core
rpd.core
snmpd.core

user@host> file rename /var/tmp/dcd.core /var/tmp/dcd.core.990413
user@host> file list /var/tmp
dcd.core.990413
rpd.core
snmpd.core
```

### file rename (Routing Matrix)

The following example lists the files in **/var/tmp**, renames one of the files, and then displays the list of files again to reveal the newly named file.

```
user@host> file list lcc0-re1:/var/tmp
lcc0-re1:
-----

/var/tmp:
.pccardd
sartre.conf
snmpd
syslogd.core-tarball.0.tgz

user@host> file rename lcc0-re0:/var/tmp/snmpd /var/tmp/snmpd.rr
user@host> file list lcc0-re1:/var/tmp
lcc0-re1:
-----

/var/tmp:
.pccardd
sartre.conf
snmpd.rr
syslogd.core-tarball.0.tgz
```



---

## file show

---

<b>Syntax</b>	<code>file show <i>filename</i></code> <code>&lt;encoding (base64   raw)&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the contents of a file.
<b>Options</b>	<b><i>filename</i></b> —Name of a file. For a routing matrix, the filename must include the chassis information.  <b>encoding (base64   raw)</b> —(Optional) Encode file contents with base64 encoding or show raw text.
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">file show on page 1166</a> <a href="#">file show (Routing Matrix) on page 1166</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.



## Sample Output

### file show

```
user@host> file show /var/log/messages
Apr 13 21:00:08 romney /kernel: so-1/1/2: loopback suspected; going to standby.
Apr 13 21:00:40 romney /kernel: so-1/1/2: loopback suspected; going to standby.
Apr 13 21:02:48 romney last message repeated 4 times
Apr 13 21:07:04 romney last message repeated 8 times
Apr 13 21:07:13 romney /kernel: so-1/1/0: Clearing SONET alarm(s) RDI-P
Apr 13 21:07:29 romney /kernel: so-1/1/0: Asserting SONET alarm(s) RDI-P
...
```

### file show (Routing Matrix)

```
user@host> file show lcc0-re0:/var/tmp/gdbinit
lcc0-re0:
-----
#####
# Settings
#####


set print pretty

#####
# Basic stuff
#####

define msgbuf
    printf "%s", msgbufp->msg_ptr
end
# hex dump of a block of memory
# usage: dump address length
define dump
    p $arg0, $arg1
    set $ch = $arg0
    set $j = 0
    set $n = $arg1
    while ($j < $n)
        #printf "%x %x ",&$ch[$j],$ch[$j]
        printf "%x ",$ch[$j]
        set $j = $j + 1
        if (!($j % 16))
            printf "\n"
        end
    end
end
end
```



## request system configuration rescue delete

<b>Syntax</b>	request system configuration rescue delete
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Delete an existing rescue configuration.
	<div>  <p><b>NOTE:</b> The [edit system configuration] hierarchy is not available on QFabric systems.</p> </div>
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">request system configuration rescue save on page 330</a></li> <li>• <a href="#">request system software rollback on page 370</a></li> <li>• <a href="#">show system commit on page 884</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">request system configuration rescue delete on page 1167</a>
<b>Output Fields</b>	This command produces no output.

### Sample Output


```
request system
configuration rescue
delete
```

```
user@host> request system configuration rescue delete
```



## request system configuration rescue save

---

<b>Syntax</b>	request system configuration rescue save
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Save the most recently committed configuration as the rescue configuration so that you can return to it at any time by using the <b>rollback</b> command.
	<div><div><p><b>NOTE:</b> The [edit system configuration] hierarchy is not available on QFabric systems.</p></div></div>
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">request system software delete on page 358</a></li><li>• <a href="#">request system software rollback on page 370</a></li><li>• <a href="#">show system commit on page 884</a></li></ul>
<b>List of Sample Output</b>	<a href="#">request system configuration rescue save on page 1168</a>
<b>Output Fields</b>	This command produces no output.

### Sample Output

<code>request system configuration rescue save</code>	<code>user@host&gt; request system configuration rescue save</code>
---	---



## show system commit

<b>Syntax</b>	show system commit
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the system commit history and any pending commit operation.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">clear system commit on page 289</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show system commit on page 1170</a> <a href="#">show system commit (At a Particular Time) on page 1170</a> <a href="#">show system commit (At the Next Reboot) on page 1170</a> <a href="#">show system commit (Rollback Pending) on page 1170</a> <a href="#">show system commit (QFX Series) on page 1170</a>
<b>Output Fields</b>	Table 68 on page 884 describes the output fields for the <b>show system commit</b> command. Output fields are listed in the approximate order in which they appear.

**Table 84: show system commit Output Fields**

Field Name	Field Description
<b>Commit history</b>	Displays the last 50 commit operations listed, most recent to first. The identifier <b>rescue</b> designates a configuration created for recovery using the <b>request system configuration rescue save</b> command.
<b>Timestamp</b>	Date and time of the commit operation.
<b>Username</b>	User who executed the commit operation.
<b>Commit method</b>	Method used to execute the commit operation: <ul style="list-style-type: none"> <li>• <b>cli</b>—CLI interactive user performed the commit operation.</li> <li>• <b>Junos XML protocol</b>—Junos XML protocol client performed the commit operation.</li> <li>• <b>synchronize</b>—The <b>commit synchronize</b> command was performed on the other Routing Engine.</li> <li>• <b>snmp</b>—An SNMP <b>set</b> request caused the commit operation.</li> <li>• <b>button</b>—A button on the router or switch was pressed to commit a rescue configuration for recovery.</li> <li>• <b>autoinstall</b>—A configuration obtained through autoinstallation was committed.</li> <li>• <b>other</b>—When there is no login name associated with the session, the values for user and client default to root and other. For example, during a reboot after package installation, mgd commits the configuration as a system commit, and there is no login associated with the commit.</li> </ul>



## Sample Output

```
show system commit      user@host> show system commit
                        0  2003-07-28 19:14:04 PDT by root via other
                        1  2003-07-25 22:01:36 PDT by regress via cli
                        2  2003-07-25 22:01:32 PDT by regress via cli
                        3  2003-07-25 21:30:13 PDT by root via button
                        4  2003-07-25 13:46:48 PDT by regress via cli
                        5  2003-07-25 05:33:21 PDT by root via autoinstall
                        ...
                        rescue 2002-05-10 15:32:03 PDT by root via other

show system commit      user@host> show system commit
(At a Particular Time)  commit requested by root via cli at Tue May  7 15:59:00 2002

show system commit      user@host> show system commit
(At the Next Reboot)    commit requested by root via cli at reboot

show system commit      user@host> show system commit
(Rollback Pending)      0 2005-01-05 15:00:37 PST by root via cli commit confirmed, rollback in 3mins

show system commit      user@switch> show system commit
(QFX Series)            0  2011-11-25 19:17:49 PST by root via cli
```



## show system configuration archival

---

**Syntax**    show system configuration archival

**Release Information**    Introduced in Junos OS Release 7.6.  
                                  Command introduced in Junos OS Release 9.0 for EX Series switches.  
                                  Command introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Display directory and number of files queued for archival transfer.



**NOTE:** The [edit system configuration] hierarchy is not available on QFabric systems.

**Options**    This command has no options.

**Required Privilege Level**    maintenance

**List of Sample Output**    [show system configuration archival on page 1171](#)

### Sample Output

```
show system configuration archival      user@host> show system configuration archival
                                       /var/transfer/config/:
                                       total 8
```



## show system configuration rescue

---

**Syntax**    show system configuration rescue

**Release Information**    Command introduced before Junos OS Release 7.4.  
Command introduced in Junos OS Release 9.0 for EX Series switches.  
Command introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Display a rescue configuration, if one exists.



.....  
**NOTE:** The [edit system configuration] hierarchy is not available on QFabric systems.  
.....

**Options**    This command has no options.

**Required Privilege Level**    maintenance

**Related Documentation**    • [show system configuration archival on page 886](#)

**List of Sample Output**    [show system configuration rescue on page 1173](#)



## Sample Output

show system  
configuration rescue

```
user@switch> show system configuration rescue
version "7.3"; groups {
  global {
    system {
      host-name router1;
      domain-name customer.net;
      domain-search [ customer.net ];
      backup-router 192.168.124.254;
      name-server {
        172.17.28.11;
        172.17.28.101;
        172.17.28.100;
        172.17.28.10;
      }
      login {
        user regress {
          uid 928;
          class ;
          shell csh;
          authentication {
            encrypted-password "$1$kPU..$w.4FGRAGanJ8U4Yq6s bj7."; ##
SECRET-DATA
          }
        }
      }
      services {
        ftp;
        rlogin;
        rsh;
        telnet;
      }
    }
  }
}
....
```



## show system rollback

---

**Syntax**    `show system rollback number`  
              `<compare number>`

**Release Information**    Command introduced before Junos OS Release 7.4.  
                              Command introduced in Junos OS Release 9.0 for EX Series switches.  
                              Command introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Display the contents of a previously committed configuration, or the differences between two previously committed configurations.



.....  
**NOTE:** The `show system rollback` command is a purely operational mode command and cannot be issued with `run` from the configuration mode.  
.....

**Options**    *number*—Number of a configuration to view. The output displays the configuration. The range of values is 0 through 49.

`compare number`—(Optional) Number of another previously committed (rollback) configuration to compare to rollback *number*. The output displays the differences between the two configurations. The range of values is 0 through 49.

**Required Privilege Level**    view

**List of Sample Output**    [show system rollback compare on page 1175](#)



## Sample Output

```

show system rollback 3 compare 1
compare
user@host> show system rollback 3 compare 1
[edit]
+ interfaces {
+   ge-1/1/1 {
+     unit 0 {
+       family inet {
+         filter {
+           input mf_plp;
+         }
+         address 14.1.1.1/30;
+       }
+     }
+   }
+   ge-1/2/1 {
+     unit 0 {
+       family inet {
+         filter {
+           input mf_plp;
+         }
+         address 13.1.1.1/30;
+       }
+     }
+   }
+   ge-1/3/0 {
+     unit 0 {
+       family inet {
+         filter {
+           input mf_plp;
+         }
+         address 12.1.1.1/30;
+       }
+     }
+   }
+ }
+}

```



## test configuration

---

<b>Syntax</b>	<code>test configuration filename</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Verify that the syntax of a configuration file is correct. If the configuration contains any syntax or commit check errors, a message is displayed to indicate the line number and column number in which the error was found.
<b>Options</b>	<b>filename</b> —Name of the configuration file.  <b>syntax-only</b> —Check the syntax of a partial configuration file, without checking for commit errors. This option introduced in Junos OS Release 12.1.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">test configuration on page 1176</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

```
test configuration      user@host> test configuration terminal
                        [Type ^D to end input]
                        system {
                        host-name bluesky;
                        paris-23;
                        login;
                        }
                        terminal:3:(8) syntax error: paris
                        [edit system]
                        'paris-23;'
                        syntax error
                        terminal:4:(11) statement must contain additional statements: ;
                        [edit system login]
                        'login ;'
                        statement must contain additional statements
                        configuration syntax failed
```



## CHAPTER 11

# Troubleshooting

- [Troubleshooting Procedures on page 1177](#)

## Troubleshooting Procedures

---

- [Loading a Previous Configuration File on page 1177](#)
- [Reverting to the Default Factory Configuration on page 1178](#)
- [Reverting to the Rescue Configuration on page 1178](#)

### Loading a Previous Configuration File

You can use the **rollback** <*number*> command to return to a previously committed configuration file. A switch saves the last 50 committed configurations, including the rollback number, date, time, and name of the user who issued the **commit** configuration command.

#### Syntax

**rollback** <*number*>

#### Options

- **none**—Return to the most recently saved configuration.
- **number**—Configuration to return to.
  - **Range:** 0 through 49. The most recently saved configuration is number 0, and the oldest saved configuration is number 49.
  - **Default:** 0

To return to a configuration prior to the most recently committed one:

1. Specify the rollback number (here, 1 is entered and the configuration returns to the previously committed configuration):

```
[edit]
user@switch# rollback 1
load complete
```

2. Activate the configuration you have loaded:

```
[edit]
```



```
user@switch# commit
```

**Related Documentation**

- [Configuration File Terms on page 29](#)

## Reverting to the Default Factory Configuration

If for any reason the current active configuration fails, you can revert to the default factory configuration. The default factory configuration contains the basic configuration settings. This is the first configuration of the switch, and it is loaded when the switch is first installed and powered on.

The **load factory default** command is a standard Junos OS configuration command. This configuration command replaces the current active configuration with the default factory configuration.

To revert the switch to the rescue configuration:

1. 

```
[edit]
user@switch# load factory-default
[edit]
user@switch# delete system commit factory-settings
[edit]
user@switch# commit
```

**Related Documentation**

- [Understanding Configuration Files on page 1113](#)
- [Loading a Previous Configuration File on page 1122](#)
- [Reverting to the Rescue Configuration on page 150](#)

## Reverting to the Rescue Configuration

If someone inadvertently commits a configuration that denies management access to a QFX Series product and the console port is not accessible, you can overwrite the invalid configuration and replace it with the rescue configuration. The rescue configuration is a previously committed, valid configuration.

To revert the switch to the rescue configuration:

1. Enter the **load override** command.

```
[edit]
user@switch# load override filename
```
2. Commit your changes.

```
[edit]
user@switch# commit filename
```

**Related Documentation**

- [Setting or Deleting the Rescue Configuration on page 1131](#)
- [Reverting to the Default Factory Configuration on page 148](#)
- [Configuration File Terms on page 29](#)



## PART 5

# User and Access Management

- [Overview on page 1181](#)
- [Configuration on page 1211](#)
- [Administration on page 1341](#)







## CHAPTER 12

# Overview

- [Software Overview on page 1181](#)
- [Access Control Overview on page 1184](#)

## Software Overview

---

- [Understanding Software Infrastructure and Processes on page 1181](#)
- [Understanding User and Access Management Features on the QFabric System on page 1183](#)

## Understanding Software Infrastructure and Processes

The QFX Series products run the Juniper Networks Junos OS. Junos OS includes processes for Internet Protocol (IP) routing and for managing interfaces, networks, and the switch.

Junos OS runs on the Routing Engine. The Routing Engine kernel coordinates communication among the Junos OS processes and provides a link to the Packet Forwarding Engine.

Using the Junos OS command-line interface (CLI), you configure switching features and set the properties of network interfaces. After activating a software configuration, use either the Junos Space or CLI user interface to monitor, manage operations, and diagnose protocol and network connectivity problems.

- [Routing Engine and Packet Forwarding Engine on page 1181](#)
- [Junos OS Processes on page 1182](#)

## Routing Engine and Packet Forwarding Engine

---

A switch has two primary software processing components:

- **Packet Forwarding Engine**—Processes packets; applies filters, routing policies, and other features; and forwards packets to the next hop along the route to their final destination.
- **Routing Engine**—Provides three main functions:
  - Creates the packet forwarding switch, which provides route lookup, filtering, and switching on incoming data packets, and then directs outbound packets to the appropriate interface for transmission to the network.



- Maintains the routing tables used by the switch and controls the routing protocols that run on the switch.
- Provides control and monitoring functions for the switch, including controlling power and monitoring system status.

### Junos OS Processes

Junos OS running on the Routing Engine and Packet Forwarding Engine consists of multiple processes that are responsible for individual functions.

The separation of functions provides operational stability, because each process accesses its own protected memory space. In addition, because each process is a separate software package, you can selectively upgrade all or part of the Junos OS for added flexibility.

Table 20 on page 44 describes the primary Junos OS processes.

**Table 85: Junos OS Processes**

Process	Name	Description
Chassis process	chassisd	<p>Detects hardware on the system that is used to configure network interfaces.</p> <p>Monitors the physical status of hardware components and field-replaceable units (FRUs), detecting when environment sensors such as temperature sensors are triggered.</p> <p>Relays signals and interrupts—for example, when devices are taken offline, so that the system can close sessions and shut down gracefully.</p>
DNS Server process	named-service	Resolves hostnames into addresses.
Dynamic Host Configuration Protocol (DHCP) process	dhcp-service	Enables a DHCP server to allocate network IP addresses and deliver configuration settings to client hosts without user intervention.
Ethernet switching process	eswd	<p>Handles Layer 2 switching functionality such as MAC address learning, Spanning Tree Protocol, and access port security.</p> <p>Manages Ethernet switching interfaces, VLANs, and VLAN interfaces.</p>
Firewall management process	firewall	Manages the firewall configuration and helps accept or reject packets that are transiting an interface on a switch.
Forwarding process	pfem	Defines how routing protocols operate on the partition. The overall performance of the partition is largely determined by the effectiveness of the forwarding process.
Interface process	dcd	Configures and monitors network interfaces by defining physical characteristics such as link encapsulation, hold times, and keepalive timers.
Integrated Local Management Interface (ILMI) process	ilmi	Provides bidirectional exchange of management information between two ATM interfaces across a physical connection.



Table 85: Junos OS Processes (*continued*)

Process	Name	Description
Link Management Protocol (LMP) process	link-management	Establishes and maintains LMP control channels.
Management process	mgd	<p>Provides communication between the other processes and an interface to the configuration database.</p> <p>Populates the configuration database with configuration information and retrieves the information when queried by other processes to ensure that the system operates as configured.</p> <p>Interacts with the other processes when commands are issued through one of the user interfaces on the partition.</p> <p>If a process terminates or fails to start when called, the management process attempts to restart it a limited number of times to prevent thrashing and logs any failure information for further investigation.</p>
Multicast snooping process	multicast-snooping	Makes Layer 2 devices, such as VLAN switches, aware of Layer 3 information, such as the media access control (MAC) addresses of members of a multicast group.
Secure Neighbor Discovery (SEND) Protocol process	send	Protects Neighbor Discovery Protocol (NDP) messages.
Simple Network Management Protocol (SNMP) process	snmp	Enables the monitoring of network devices from a central location and provides the switch's SNMP master agent.
Tunnel OAM process	tunnel-oamd	Enables the Operations, Administration, and Maintenance of Layer 2 tunneled networks. Layer 2 protocol tunneling (L2PT) allows service providers to send Layer 2 protocol data units (PDUs) across the provider's cloud and deliver them to Juniper Networks EX Series Ethernet Switches that are not part of the local broadcast domain.
Virtual Router Redundancy Protocol (VRRP) process	vrrp	Enables hosts on a LAN to make use of redundant routing platforms on that LAN without requiring more than the static configuration of a single default route on the hosts.

- Related Documentation**
- *Junos OS Baseline Network Operations Guide*
  - *Junos OS System Basics Configuration Guide*

## Understanding User and Access Management Features on the QFabric System

The QFabric system supports the following user and access management features:

- User authentication
- RADIUS
- Link Layer Discovery Protocol (LLDP)



- SSH
- TACACS+
- Access privilege management

The specific functionality, features, options, syntax, and hierarchy levels of some of the user and access management commands and configuration statements implemented on the QFabric system may differ somewhat from the same commands and configuration statements on standard Junos OS. See the configuration statement or command topic in the documentation set for additional information, and use the help (?) command-line function to display specific information as needed.

Some user and access management features are not yet fully supported in the full QFabric architecture, although full support is planned for future releases. The user and access management features currently unsupported on the QFabric system include:

- Full RADIUS server support, including RADIUS accounting
- **accounting-options** configuration statement hierarchy
- **tacplus-options** configuration statement

---

## Access Control Overview

- [Overview of Template Accounts for RADIUS and TACACS+ Authentication on page 1185](#)
- [Understanding Login Authentication on page 1185](#)
- [Understanding LLDP on page 1186](#)
- [Understanding RADIUS Accounting on page 1187](#)
- [Understanding VSAs on the QFX Series on page 1188](#)
- [Juniper Networks Vendor-Specific RADIUS Attributes on page 1188](#)
- [Juniper Networks Vendor-Specific TACACS+ Attributes on page 1190](#)
- [Understanding Junos OS Access Privilege Levels on page 1192](#)
- [Junos OS Authentication Order for RADIUS, TACACS+, and Password Authentication on page 1196](#)
- [Junos OS User Authentication Methods on page 1201](#)
- [Junos OS User Accounts Overview on page 1201](#)
- [Junos OS Login Classes Overview on page 1203](#)
- [Understanding QFabric System Login Classes on page 1204](#)
- [Regular Expressions for Allowing and Denying Junos OS Configuration Mode Hierarchies on page 1205](#)
- [Regular Expressions for Allowing and Denying Junos OS Operational Mode Commands on page 1206](#)
- [Special Requirements for Junos OS Plain-Text Passwords on page 1207](#)



## Overview of Template Accounts for RADIUS and TACACS+ Authentication

When you use local password authentication, you must create a local user account for every user who wants to access the system. However, when you are using RADIUS or TACACS+ authentication, you can create single accounts (for authorization purposes) that are shared by a set of users. You create these accounts using the remote and local user template accounts. When a user is using a template account, the command-line interface (CLI) username is the login name; however, the privileges, file ownership, and effective user ID are inherited from the template account.

### Related Documentation

- [Configuring Remote Template Accounts for User Authentication on page 1221](#)
- [Configuring Local User Template Accounts for User Authentication on page 1215](#)

## Understanding Login Authentication

You can control access to your network through the Juniper Networks QFX Series using several different authentication methods—media access control (MAC) RADIUS, for example. Authentication prevents unauthorized devices and users from gaining access to your LAN. For MAC RADIUS authentication, end devices must be authenticated before they receive an IP address from a DHCP server.

You can enable end devices to access the network without authenticating on the RADIUS server by configuring the MAC address of the end device in the static MAC bypass list by configuring the MAC address using the **authentication-whitelist** statement.

You can configure one or more authentication methods on a single interface and thereby enable fallback to the next method if the first or second method is unsuccessful.

On a single interface you can configure one or a combination of several authentication methods.

This topic covers:

- [MAC RADIUS Authentication on page 1185](#)

### MAC RADIUS Authentication

You can configure MAC RADIUS authentication on interfaces that are connected to end devices.

The EAP method supported for MAC RADIUS authentication on the QFX Series is EAP-MD5.

When you configure the **mac-radius restrict** option, the switch immediately attempts a MAC- RADIUS authentication by sending a request to the RADIUS server for authentication of the MAC address of the end device. If MAC address of the end device is configured for RADIUS authentication, LAN access between the two switches is created.

### Related Documentation

- [Configuring RADIUS Authentication on page 1219](#)



## Understanding LLDP

The QFX Series product uses Link Layer Discovery Protocol (LLDP) to learn and distribute device information on network links. The information enables the switch to identify a variety of devices quickly. This quick identification results in a LAN that interoperates smoothly and efficiently.

LLDP-capable devices transmit information in type, length, and value (TLV) messages to neighbor devices. Device information can include specifics, such as chassis and port identification and system name and system capabilities. The TLVs leverage this information from parameters that have already been configured in Junos OS.

The QFX Series products support the following basic TLVs:

- **Chassis Identifier**—The MAC address associated with the local system.
- **Port Identifier**—The port identification for the specified port in the local system.
- **Port Description**—The user-configured port description. The port description can be a maximum of 256 characters.
- **System Name**—The user-configured name of the local system. The system name can be a maximum of 256 characters.
- **System Description**—The system description containing information about the software and current image running on the system. This information cannot be configured, but is taken from the software.
- **System Capabilities**—The primary function performed by the system. The capabilities that system supports are defined; for example, bridge or router. This information cannot be configured, but is based on the model of the product.
- **Management Address**—The IP management address of the local system.

The QFX Series products support the following 802.3 TLVs:

- **Power via MDI**—A TLV that advertises media dependent interface (MDI) power support, power source equipment (PSE) power pair, and power class information.
- **MAC/PHY Configuration Status**—A TLV that advertises information about the physical interface, such as autonegotiation status and support and MAU type. The information cannot be configured, but is based on the physical interface structure.
- **Link Aggregation**—A TLV that advertises whether the port is aggregated and its aggregated port ID.
- **Maximum Frame Size**—A TLV that advertises the Maximum Transmission Unit (MTU) of the interface sending LLDP frames.
- **Port Vlan**—A TLV that advertises the VLAN name configured on the interface.

### Related Documentation

- [Configuring LLDP on page 1214](#)



## Understanding RADIUS Accounting

Juniper Networks QFX Series products support IETF RFC 2866, *RADIUS Accounting*. Configuring RADIUS accounting on the QFX Series supports collecting statistical data about users logging in to or out from a LAN and sending the data to a RADIUS accounting server. The statistical data gathered can be used for general network monitoring, analyzing and tracking usage patterns, or billing a user based upon the amount of time or type of services accessed.

To configure RADIUS accounting, specify one or more RADIUS accounting servers to receive the statistical data from the switch, and select the type of accounting data to be collected.

The RADIUS accounting server you specify can be the same server used for RADIUS authentication, or it can be a separate RADIUS server. You can specify a list of RADIUS accounting servers. If the primary server (the first one configured) is unavailable, each RADIUS server in the list is tried in the order in which they are configured in the Junos OS.

The RADIUS accounting process between the switch and a RADIUS server works like this:

1. A RADIUS accounting server listens for User Datagram Protocol (UDP) packets on a specific port. For example, on FreeRADIUS, the default port is 1813.
2. The switch forwards an *accounting-request* packet containing an event record to the accounting server. The event record associated with this supplicant contains an *Acct-Status-Type* attribute whose value indicates the beginning of user service for this supplicant. When the supplicant's session ends, the accounting request contains an *Acct-Status-Type* attribute value indicating the end of user service. The RADIUS accounting server records this as a stop-accounting record containing session information and the length of the session.
3. The RADIUS accounting server logs these events in a file as start-accounting or stop-accounting records. On FreeRADIUS, the filename is the server's address; for example, 122.69.1.250.
4. The accounting server sends an *accounting-response* packet back to the switch confirming it has received the accounting request.
5. If the switch does not receive a response from the server, it continues to send accounting requests until an accounting response is returned from the accounting server.

The statistics collected through this process can be displayed from the RADIUS server; to see those statistics, the user accesses the log file configured to receive them.

### Related Documentation

- [Configuring RADIUS Accounting on page 1217](#)



## Understanding VSAs on the QFX Series

The Juniper Networks QFX Series products support the configuration of RADIUS server attributes specific to Juniper Networks. These attributes are known as vendor-specific attributes (VSAs) and are described in RFC 2138, *Remote Authentication Dial In User Service* (RADIUS).

Through VSAs, you can configure port-filtering attributes on the RADIUS server. VSAs are cleartext fields sent from the RADIUS server to the switch as a result of authentication success or failure. Authentication prevents unauthorized user access by blocking a supplicant at the port until the device is authenticated by the RADIUS server. The VSA attributes are interpreted by the switch during authentication, and the switch takes appropriate actions. Implementing port-filtering attributes with authentication on the RADIUS server provides a central location for controlling LAN access for supplicants.

These port-filtering attributes specific to Juniper Networks are encapsulated in a RADIUS server VSA with the vendor ID set to the Juniper Networks ID number, 2636.

As well as configuring port-filtering attributes through VSAs, you can apply a port firewall filter that has already been configured on the switch directly to the RADIUS server. Like port-filtering attributes, the filter is applied during the authentication process, and its actions are applied at the switch port. Adding a port firewall filter to a RADIUS server eliminates the need to add the filter to multiple ports and switches.

- Related Documentation**
- [Configuring Firewall Filters on page 4177](#)
  - [Configuring RADIUS Authentication on page 1219](#)
  - [VSA Match Conditions and Actions on page 1243](#)

## Juniper Networks Vendor-Specific RADIUS Attributes

Junos OS supports the configuration of Juniper Networks RADIUS vendor-specific attributes (VSAs). These VSAs are encapsulated in a RADIUS vendor-specific attribute with the vendor ID set to the Juniper Networks ID number, 2636. [Table 86 on page 1188](#) lists the Juniper Networks VSAs you can configure.

**Table 86: Juniper Networks Vendor-Specific RADIUS Attributes**

Name	Description	Type	Length	String
Juniper-Local-User-Name	Indicates the name of the user template used by this user when logging in to a device. This attribute is used only in Access-Accept packets.	1	≥3	One or more octets containing printable ASCII characters.



Table 86: Juniper Networks Vendor-Specific RADIUS Attributes (*continued*)

Name	Description	Type	Length	String
Juniper-Allow-Commands	Contains an extended regular expression that enables the user to run operational mode commands in addition to the commands authorized by the user's login class permission bits. This attribute is used only in Access-Accept packets.	2	≥3	One or more octets containing printable ASCII characters, in the form of an extended regular expression. See <a href="#">"Regular Expressions for Allowing and Denying Junos OS Operational Mode Commands"</a> on page 1206.
Juniper-Deny-Commands	Contains an extended regular expression that denies the user permission to run operation mode commands authorized by the user's login class permission bits. This attribute is used only in Access-Accept packets.	3	≥3	One or more octets containing printable ASCII characters, in the form of an extended regular expression. See <a href="#">"Regular Expressions for Allowing and Denying Junos OS Operational Mode Commands"</a> on page 1206.
Juniper-Allow-Configuration	Contains an extended regular expression that enables the user to run configuration mode commands in addition to the commands authorized by the user's login class permission bits. This attribute is used only in Access-Accept packets.	4	≥3	One or more octets containing printable ASCII characters, in the form of an extended regular expression. See <a href="#">"Regular Expressions for Allowing and Denying Junos OS Configuration Mode Hierarchies"</a> on page 1205.
Juniper-Deny-Configuration	Contains an extended regular expression that denies the user permission to run configuration commands authorized by the user's login class permission bits. This attribute is used only in Access-Accept packets.	5	≥3	One or more octets containing printable ASCII characters, in the form of an extended regular expression. See <a href="#">"Regular Expressions for Allowing and Denying Junos OS Configuration Mode Hierarchies"</a> on page 1205.
Juniper-Interactive-Command	Indicates the interactive command entered by the user. This attribute is used only in Accounting-Request packets.	8	≥3	One or more octets containing printable ASCII characters.
Juniper-Configuration-Change	Indicates the interactive command that results in a configuration (database) change. This attribute is used only in Accounting-Request packets.	9	≥3	One or more octets containing printable ASCII characters.



Table 86: Juniper Networks Vendor-Specific RADIUS Attributes (*continued*)

Name	Description	Type	Length	String
Juniper-User-Permissions	<p>Contains information the server uses to specify user permissions. This attribute is used only in Access-Accept packets.</p> <p><b>NOTE:</b> When the <b>Juniper-User-Permissions</b> attribute is configured to grant the Junos OS <b>maintenance</b> or <b>all</b> permissions on a RADIUS server, the UNIX wheel group membership is not automatically added to a user's list of group memberships. Some operations such as running the <b>su root</b> command from a local shell require wheel group membership permissions. However, when a user is configured locally with the permissions <b>maintenance</b> or <b>all</b>, the user is automatically granted membership to the UNIX wheel group. Therefore, we recommend that you create a template user account with the required permissions and associate individual user accounts with the template user account.</p>	10	≥3	<p>One or more octets containing printable ASCII characters.</p> <p>The string is a list of permission flags separated by a space. The exact name of each flag must be specified in its entirety. See <a href="#">Table 88 on page 1192</a>.</p>

For more information about the VSAs, see RFC 2138, *Remote Authentication Dial In User Service (RADIUS)*.

**Related Documentation**

- [Configuring RADIUS Authentication](#)
- [Configuring RADIUS Authentication on page 1219](#)

## Juniper Networks Vendor-Specific TACACS+ Attributes

Junos OS supports the configuration of Juniper Networks TACACS+ vendor-specific attributes (VSAs). These VSAs are encapsulated in a TACACS+ vendor-specific attribute with the vendor ID set to the Juniper Networks ID number, 2636. [Table 87 on page 1190](#) lists the Juniper Networks VSAs you can configure.

Table 87: Juniper Networks Vendor-Specific TACACS+ Attributes

Name	Description	Length	String
local-user-name	Indicates the name of the user template used by this user when logging in to a device.	≥3	One or more octets containing printable ASCII characters.



Table 87: Juniper Networks Vendor-Specific TACACS+ Attributes (*continued*)

Name	Description	Length	String
<b>allow-commands</b>	Contains an extended regular expression that enables the user to run operational mode commands in addition to those commands authorized by the user's login class permission bits.	≥3	One or more octets containing printable ASCII characters, in the form of an extended regular expression. See <a href="#">Table 92 on page 1206</a> .
<b>allow-configuration</b>	Contains an extended regular expression that enables the user to run configuration mode commands in addition to those commands authorized by the user's login class permission bits.	≥3	One or more octets containing printable ASCII characters, in the form of an extended regular expression. See <a href="#">“Regular Expressions for Allowing and Denying Junos OS Configuration Mode Hierarchies” on page 1205</a> .
<b>deny-commands</b>	Contains an extended regular expression that denies the user permission to run operational mode commands authorized by the user's login class permission bits.	≥3	One or more octets containing printable ASCII characters, in the form of an extended regular expression. See <a href="#">Table 92 on page 1206</a> .
<b>deny-configuration</b>	Contains an extended regular expression that denies the user permission to run configuration mode commands authorized by the user's login class permission bits.	≥3	One or more octets containing printable ASCII characters, in the form of an extended regular expression. See <a href="#">Table 91 on page 1205</a> .
<b>user-permissions</b>	<p>Contains information the server uses to specify user permissions.</p> <p><b>NOTE:</b> When the <b>user-permissions</b> attribute is configured to grant the Junos OS <b>maintenance</b> or <b>all</b> permissions on a TACACS+ server, the UNIX wheel group membership is not automatically added to a user's list of group memberships. Some operations such as running the <b>su root</b> command from a local shell require wheel group membership permissions. However, when a user is configured locally with the permissions <b>maintenance</b> or <b>all</b>, the user is automatically granted membership to the UNIX wheel group. Therefore, we recommend that you create a template user account with the required permissions and associate individual user accounts with the template user account.</p>	≥3	One or more octets containing printable ASCII characters. See <a href="#">Table 88 on page 1192</a> .

**Related Documentation**

- [Configuring TACACS+ Authentication](#)
- [Configuring TACACS+ Authentication on page 1231](#)



## Understanding Junos OS Access Privilege Levels

Each top-level command-line interface (CLI) command and each configuration statement have an access privilege level associated with them. Users can execute only those commands and configure and view only those statements for which they have access privileges. The access privileges for each login class are defined by one or more *permission flags*.

For each login class, you can explicitly deny or allow the use of operational and configuration mode commands that would otherwise be permitted or not allowed by a privilege level specified in the **permissions** statement.

The following sections provide additional information about permissions:

- [Junos OS Login Class Permission Flags on page 1192](#)
- [Allowing or Denying Individual Commands for Junos OS Login Classes on page 1195](#)

### Junos OS Login Class Permission Flags

The **permissions** statement specifies one or more of the permission flags listed in [Table 88 on page 1192](#). Permission flags are not cumulative, so for each class you must list all the permission flags needed, including **view** to display information and **configure** to enter configuration mode. Two forms of permissions control for individual parts of the configuration are:

- "Plain" form—Provides read-only capability for that permission type. An example is **interface**.
- Form that ends in **-control**—Provides read and write capability for that permission type. An example is **interface-control**.

[Table 88 on page 1192](#) lists the Junos® operating system (Junos OS) login class permission flags that you can configure by including the **permissions** statement at the **[edit system login class class-name]** hierarchy level.

**Table 88: Login Class Permission Flags**

Permission Flag	Description
<b>access</b>	Can view the access configuration in configuration mode and with the <b>show configuration</b> operational mode command.
<b>access-control</b>	Can view and configure access information at the <b>[edit access]</b> hierarchy level.
<b>admin</b>	Can view user account information in configuration mode and with the <b>show configuration</b> operational mode command.
<b>admin-control</b>	Can view user accounts and configure them at the <b>[edit system login]</b> hierarchy level.



Table 88: Login Class Permission Flags (*continued*)

Permission Flag	Description
<b>all-control</b>	Can access all operational mode commands and configuration mode commands. Can modify configuration in all the configuration hierarchy levels.
<b>clear</b>	Can clear (delete) information learned from the network that is stored in various network databases by using the <b>clear</b> commands.
<b>configure</b>	Can enter configuration mode by using the <b>configure</b> command.
<b>control</b>	Can perform all control-level operations—all operations configured with the <b>-control</b> permission flags.
<b>field</b>	Can view field debug commands. Reserved for debugging support.
<b>firewall</b>	Can view the firewall filter configuration in configuration mode.
<b>firewall-control</b>	Can view and configure firewall filter information at the <b>[edit firewall]</b> hierarchy level.
<b>floppy</b>	Can read from and write to the removable media.
<b>flow-tap</b>	Can view the flow-tap configuration in configuration mode.
<b>flow-tap-control</b>	Can view the flow-tap configuration in configuration mode and can configure flow-tap configuration information at the <b>[edit services flow-tap]</b> hierarchy level.
<b>flow-tap-operation</b>	<p>Can make flow-tap requests to the router or switch. For example, a Dynamic Tasking Control Protocol (DTCP) client must authenticate itself to the Junos OS as an administrative user. That account must have <b>flow-tap-operation</b> permission.</p> <p><b>NOTE:</b> The <b>flow-tap-operation</b> option is not included in the <b>all-control</b> permissions flag.</p>
<b>idp-profiler-operation</b>	Can view profiler data.
<b>interface</b>	Can view the interface configuration in configuration mode and with the <b>show configuration</b> operational mode command.



Table 88: Login Class Permission Flags (*continued*)

Permission Flag	Description
<b>interface-control</b>	Can view chassis, class of service (CoS), groups, forwarding options, and interfaces configuration information. Can edit configuration at the following hierarchy levels: <ul style="list-style-type: none"> <li>• <b>[edit chassis]</b></li> <li>• <b>[edit class-of-service]</b></li> <li>• <b>[edit groups]</b></li> <li>• <b>[edit forwarding-options]</b></li> <li>• <b>[edit interfaces]</b></li> </ul>
<b>maintenance</b>	Can perform system maintenance, including starting a local shell on the router and becoming the superuser in the shell by using the <b>su root</b> command, and can halt and reboot the router by using the <b>request system</b> commands.
<b>network</b>	Can access the network by using the <b>ping</b> , <b>ssh</b> , <b>telnet</b> , and <b>traceroute</b> commands.
<b>pgcp-session-mirroring</b>	Can view the <b>pgcp</b> session mirroring configuration.
<b>pgcp-session-mirroring-control</b>	Can modify the <b>pgcp</b> session mirroring configuration.
<b>reset</b>	Can restart software processes by using the <b>restart</b> command and can configure whether software processes are enabled or disabled at the <b>[edit system processes]</b> hierarchy level.
<b>rollback</b>	Can use the <b>rollback</b> command to return to a previously committed configuration other than the most recently committed one.
<b>routing</b>	Can view general routing, routing protocol, and routing policy configuration information in configuration and operational modes.
<b>routing-control</b>	Can view general routing, routing protocol, and routing policy configuration information and can configure general routing at the <b>[edit routing-options]</b> hierarchy level, routing protocols at the <b>[edit protocols]</b> hierarchy level, and routing policy at the <b>[edit policy-options]</b> hierarchy level.
<b>secret</b>	Can view passwords and other authentication keys in the configuration.
<b>secret-control</b>	Can view passwords and other authentication keys in the configuration and can modify them in configuration mode.
<b>security</b>	Can view security configuration in configuration mode and with the <b>show configuration</b> operational mode command.



Table 88: Login Class Permission Flags (*continued*)

Permission Flag	Description
<b>security-control</b>	Can view and configure security information at the <b>[edit security]</b> hierarchy level.
<b>shell</b>	Can start a local shell on the router or switch by using the <b>start shell</b> command.
<b>snmp</b>	Can view Simple Network Management Protocol (SNMP) configuration information in configuration and operational modes.
<b>snmp-control</b>	Can view SNMP configuration information and can modify SNMP configuration at the <b>[edit snmp]</b> hierarchy level.
<b>system</b>	Can view system-level information in configuration and operational modes.
<b>system-control</b>	Can view system-level configuration information and configure it at the <b>[edit system]</b> hierarchy level.
<b>trace</b>	Can view trace file settings and configure trace file properties.
<b>trace-control</b>	Can modify trace file settings and configure trace file properties.
<b>view</b>	Can use various commands to display current system-wide, routing table, and protocol-specific values and statistics. Cannot view the secret configuration.
<b>view-configuration</b>	Can view all of the configuration excluding secrets, system scripts, and event options.  <b>NOTE:</b> Only users with the <b>maintenance</b> permission can view commit script, op script, or event script configuration.

### Allowing or Denying Individual Commands for Junos OS Login Classes

By default, all top-level CLI commands have associated access privilege levels. Users can execute only those commands and view only those statements for which they have access privileges. For each login class, you can explicitly deny or allow the use of operational and configuration mode commands that would otherwise be permitted or not allowed by a privilege level specified in the **permissions** statement.

- The **all** login class permission bits take precedence over extended regular expressions when a user with **rollback** permission issues the **rollback** command.
- Expressions used to allow and deny commands for users on RADIUS and TACACS+ servers have been simplified. Instead of a single, long expression with multiple commands (**allow-commands=cmd1 cmd2 ... cmdn**), you can specify each command as a separate expression. This new syntax is valid for **allow-configuration** and



**deny-configuration**, **allow-commands** and **deny-commands**, and all user permission bits.

- Users cannot issue the **load override** command when specifying an extended regular expression. Users can only issue the **merge**, **replace**, and **patch** configuration commands.
- If you allow and deny the same commands, the **allow-commands** permissions take precedence over the permissions specified by the **deny-commands**. For example, if you include **allow-commands "request system software add"** and **deny-commands "request system software add"**, the login class user is allowed to install software using the **request system software add** command.
- Regular expressions for **allow-commands** and **deny-commands** can also include the **commit**, **load**, **rollback**, **save**, **status**, and **update** commands.
- If you specify a regular expression for **allow-commands** and **deny-commands** with two different variants of a command, the longest match is always executed.

For example, if you specify a regular expression for **allow-commands** with the **commit-synchronize** command and a regular expression for **deny-commands** with the **commit** command, users assigned to such a login class would be able to issue the **commit synchronize** command, but not the **commit** command. This is because **commit-synchronize** is the longest match between **commit** and **commit-synchronize** and it is specified for **allow-commands**.

Likewise, if you specify a regular expression for **allow-commands** with the **commit** command and a regular expression for **deny-commands** with the **commit-synchronize** command, users assigned to such a login class would be able to issue the **commit** command, but not the **commit-synchronize** command. This is because **commit-synchronize** is the longest match between **commit** and **commit-synchronize** and it is specified for **deny-commands**.

#### Related Documentation

- [Configuring Access Privilege Levels on page 1212](#)

## Junos OS Authentication Order for RADIUS, TACACS+, and Password Authentication

Using the **authentication-order** statement, you can prioritize the order in which the Junos OS tries the different authentication methods when verifying user access to a router or switch.

If the **authentication-order** is remote-server then local, Junos OS will retry the local server if the remote-server is unreachable or has timed out. However, if the remote-server rejects the authentication, Junos OS will not retry the authentication.

If none of the configured authentication methods accept the login credentials and if a reject response is received, the login attempt fails. If no response is received from any configured authentication method, the Junos OS consults local password authentication as a last resort.

### Using RADIUS or TACACS+ Authentication

You can configure the Junos OS to be both a RADIUS and TACACS+ authentication client.



If an authentication method included in the **[authentication-order]** statement is not available, or if the authentication is available but returns a reject response, the Junos OS tries the next authentication method included in the **authentication-order** statement.

The RADIUS or TACACS+ server authentication might fail because of the following reasons:

- The authentication method is configured, but the corresponding authentication servers are not configured. For instance, the RADIUS and TACACS+ authentication methods are included in the **authentication-order** statement, but the corresponding RADIUS or TACACS+ servers are not configured at the respective **[edit system radius-server]** and **[edit system tacplus-server]** hierarchy levels.
- The RADIUS or TACACS+ server does not respond within the timeout period configured at the **[edit system radius-server]** or **[edit system tacplus-server]** hierarchy levels.
- The RADIUS or TACACS+ server is not reachable because of a network problem.

The RADIUS or TACACS+ server authentication might return a reject response because of the following reasons:

- The user profiles of users accessing a router or switch might not be configured on the RADIUS or TACACS+ server.
- The user enters incorrect logon credentials.

### Using Local Password Authentication

You can explicitly configure the password authentication method or use this method as a fallback mechanism when remote authentication servers fail. The password authentication method consults the local user profiles configured at the **[edit system login]** hierarchy level. Users can log in to a router or switch using their local username and password in the following scenarios:

- The password authentication method (password) is explicitly configured as one of the authentication methods in the **[authentication-order authentication-methods]** statement. In this case, the password authentication method is tried if no previous authentication accepts the logon credentials. This is true whether the previous authentication method fails to respond or returns a reject response because of an incorrect username or password.
- The password authentication method is not explicitly configured as one of the authentication methods in the **authentication-order authentication-methods** statement. In this case, the password authentication method is tried only if all configured authentication methods fail to respond. It is not consulted if any configured authentication method returns a reject response because of an incorrect username or password.

### Order of Authentication Attempts

[Table 89 on page 1198](#) describes how the **authentication-order** statement at the **[edit system]** hierarchy level determines the procedure that the Junos OS uses to authenticate users for access to a router or switch.



Table 89: Order of Authentication Attempts

Syntax	Order of Authentication Attempts
<b>authentication-order radius;</b>	<ol style="list-style-type: none"> <li>1. Try configured RADIUS authentication servers.</li> <li>2. If RADIUS server is available and authentication is accepted, grant access.</li> <li>3. If RADIUS server is available but authentication is rejected, deny access.</li> <li>4. If RADIUS servers are not available, try password authentication.</li> </ol> <p><b>NOTE:</b> If a RADIUS server is available, password authentication is not attempted, because it is not explicitly configured in the authentication order.</p>
<b>authentication-order [ radius password ];</b>	<ol style="list-style-type: none"> <li>1. Try configured RADIUS authentication servers.</li> <li>2. If RADIUS servers fail to respond or return a reject response, try password authentication, because it is explicitly configured in the authentication order.</li> </ol>
<b>authentication-order [ radius tacplus ];</b>	<ol style="list-style-type: none"> <li>1. Try configured RADIUS authentication servers.</li> <li>2. If RADIUS server is available and authentication is accepted, grant access.</li> <li>3. If RADIUS servers fail to respond or return a reject response, try configured TACACS+ servers.</li> <li>4. If TACACS+ server is available and authentication is accepted, grant access.</li> <li>5. If TACACS+ server is available but authentication is rejected, deny access.</li> <li>6. If both RADIUS and TACACS+ servers are not available, try password authentication.</li> </ol> <p><b>NOTE:</b> If either RADIUS or TACACS+ servers are available, password authentication is not attempted, because it is not explicitly configured in the authentication order.</p>
<b>authentication-order [ radius tacplus password ];</b>	<ol style="list-style-type: none"> <li>1. Try configured RADIUS authentication servers.</li> <li>2. If RADIUS server is available and authentication is accepted, grant access.</li> <li>3. If RADIUS servers fail to respond or return a reject response, try configured TACACS+ servers.</li> <li>4. If TACACS+ server is available and authentication is accepted, grant access.</li> <li>5. If TACACS+ servers fail to respond or return a reject response, try password authentication, because it is explicitly configured in the authentication order.</li> </ol>



Table 89: Order of Authentication Attempts (*continued*)

Syntax	Order of Authentication Attempts
<b>authentication-order tacplus;</b>	<ol style="list-style-type: none"> <li>1. Try configured TACACS+ authentication servers.</li> <li>2. If TACACS+ server is available and authentication is accepted, grant access.</li> <li>3. If TACACS+ server is available but authentication is rejected, deny access.</li> <li>4. If TACACS+ servers are not available, try password authentication.</li> </ol> <p><b>NOTE:</b> If a TACACS+ server is available, password authentication is not attempted, because it is not explicitly configured in the authentication order.</p>
<b>authentication-order [ tacplus password ];</b>	<ol style="list-style-type: none"> <li>1. Try configured TACACS+ authentication servers.</li> <li>2. If TACACS+ servers fail to respond or return a reject response, try password authentication, because it is explicitly configured in the authentication order.</li> </ol>
<b>authentication-order [ tacplus radius ];</b>	<ol style="list-style-type: none"> <li>1. Try configured TACACS+ authentication servers.</li> <li>2. If TACACS+ server is available and authentication is accepted, grant access.</li> <li>3. If TACACS+ servers fail to respond or return a reject response, try configured RADIUS servers.</li> <li>4. If RADIUS server is available and authentication is accepted, grant access.</li> <li>5. If RADIUS server is available but authentication is rejected, deny access.</li> <li>6. If both TACACS+ and RADIUS servers are not available, try password authentication.</li> </ol> <p><b>NOTE:</b> If either TACACS+ or RADIUS servers are available, password authentication is not attempted, because it is not explicitly configured in the authentication order.</p>
<b>authentication-order [ tacplus radius password ];</b>	<ol style="list-style-type: none"> <li>1. Try configured TACACS+ authentication servers.</li> <li>2. If TACACS+ server is available and authentication is accepted, grant access.</li> <li>3. If TACACS+ servers fail to respond or return a reject response, try configured RADIUS servers.</li> <li>4. If RADIUS server is available and authentication is accepted, grant access.</li> <li>5. If RADIUS servers fail to respond or return a reject response try password authentication, because it is explicitly configured in the authentication order.</li> </ol>



Table 89: Order of Authentication Attempts (*continued*)

Syntax	Order of Authentication Attempts
<code>authentication-order password;</code>	<ol style="list-style-type: none"> <li>1. Try to authenticate the user, using the password configured at the <code>[edit system login]</code> hierarchy level.</li> <li>2. If the authentication is accepted, grant access.</li> <li>3. If the authentication is rejected, deny access.</li> </ol>



**NOTE:** If SSH public keys are configured, SSH user authentication first tries to perform public key authentication before using the authentication methods configured in the `authentication-order` statement. If you want SSH logins to use the authentication methods configured in the `authentication-order` statement without first trying to perform public key authentication, do not configure SSH public keys.

In a routing matrix based on a TX Matrix router or a TX Matrix Plus router, the authentication order must be configured only at the configuration groups `re0` and `re1`. The authentication order must not be configured at the `[edit system]` hierarchy on the TX Matrix or TX Matrix Plus router. This is because the authentication order for the routing matrix is controlled on the switch-card chassis (or TX Matrix router) or switch-fabric chassis (or TX Matrix Plus router) only.

In Junos OS Release 10.0 and later, the superuser (belonging to the super-user login class) is also authenticated based on the authentication order that is configured for TACACS+, RADIUS, or password authentication using the `authentication-order` statement. For example, if the only configured authentication order is TACACS+, the superuser can only be authenticated by the TACACS+ server and password authentication cannot be used as an alternative. However, in Junos OS Release 9.6 and earlier, the superuser can use password authentication to login, even if password authentication is not configured explicitly using the `authentication-order` statement.

#### Related Documentation

- [Overview of Template Accounts for RADIUS and TACACS+ Authentication on page 1185](#)
- [Configuring the Junos OS Authentication Order for RADIUS, TACACS+, and Local Password Authentication on page 1214](#)
- [Limiting the Number of User Login Attempts for SSH and Telnet Sessions](#)
- [Limiting the Number of User Login Attempts for SSH and Telnet Sessions on page 1236](#)
- [Example: Configuring System Authentication for RADIUS, TACACS+, and Password Authentication on page 1251](#)



## Junos OS User Authentication Methods

The Junos OS supports three methods of user authentication: local password authentication, Remote Authentication Dial-In User Service (RADIUS), and Terminal Access Controller Access Control System Plus (TACACS+).

With local password authentication, you configure a password for each user allowed to log in to the router or switch.

RADIUS and TACACS+ are authentication methods for validating users who attempt to access the router or switch using telnet. They are both distributed client-server systems—the RADIUS and TACACS+ clients run on the router or switch, and the server runs on a remote network system.

You can configure the router or switch to be both a RADIUS and TACACS+ client, and you can also configure authentication passwords in the Junos OS configuration file. You can prioritize the methods to configure the order in which the software tries the different authentication methods when verifying user access.

### Related Documentation

- [Configuring RADIUS Authentication](#)
- [Configuring TACACS+ Authentication](#)
- [Junos OS Authentication Order for RADIUS, TACACS+, and Password Authentication on page 1196](#)
- [Configuring RADIUS Authentication on page 1219](#)
- [Configuring TACACS+ Authentication on page 1231](#)

## Junos OS User Accounts Overview

User accounts provide one way for users to access the switch. (Users can access the switch without accounts if you configured RADIUS or TACACS+ servers, as described in [“Junos OS User Authentication Methods” on page 1201](#).) For each account, you define the login name for the user and, optionally, information that identifies the user. After you have created an account, the software creates a home directory for the user.

For each user account, you can define the following:

- Username—(Optional) Name that identifies the user. It must be unique within the switch. Do not include spaces, colons, or commas in the username. The username can be up to 64 characters long.
- User's full name—(Optional) If the full name contains spaces, enclose it in quotation marks. Do not include colons or commas.
- User identifier (UID)—(Optional) Numeric identifier that is associated with the user account name. The identifier must be in the range from 100 through 64,000 and must



be unique within the switch. If you do not assign a UID to a username, the software assigns one when you commit the configuration, preferring the lowest available number.

- You must ensure that the UID is unique. However, it is possible to assign the same UID to different users. If you do this, the CLI displays a warning when you commit the configuration and then assigns the duplicate UID.
- User's access privilege—(Required) One of the login classes you defined in the **class** statement at the **[edit system login]** hierarchy level, or one of the default classes listed in ["Regular Expressions for Allowing and Denying Junos OS Configuration Mode Hierarchies"](#) on page 1205.
- Authentication method or methods and passwords that the user can use to access the switch—(Optional) You can use SSH or a Message Digest 5 (MD5) password, or you can enter a plain-text password that Junos OS encrypts using MD5-style encryption before entering it in the password database. For each method, you can specify the user's password. If you configure the **plain-text-password** option, you are prompted to enter and confirm the password:

```
[edit system login user user-name]
user@switch# set authentication plain-text-password
New password: type password here
Retype new password: retype password here
```

The default requirements for plain-text passwords are:

- The password must be between 6 and 128 characters long
  - You can include most character classes in a password (uppercase letters, lowercase letters, numbers, punctuation marks, and other special characters). Control characters are not recommended.
- Valid passwords must contain at least one change of case or character class.

For each user account and for root logins, you can configure more than one public RSA or DSA key for user authentication. When a user logs in using a user account or as root, the configured public keys are referenced to determine whether the private key matches any of them.

For SSH authentication, you can also copy the contents of an SSH key file into the configuration.

To load an SSH key file, use the **load-key-file** statement. This statement loads RSA (SSH version 1 and SSH version 2) and DSA (SSH version 2) public keys.

If you load the SSH keys file, the contents of the file are copied into the configuration immediately after you enter the **load-key-file** statement. To view the SSH key entries, use the configuration mode **show** command. For example:

```
[edit system login user boojum]
user@switch# set authentication load-key-file my-host:.ssh/identity.pub
.file.19692 | 0 KB | 0.3 kB/s | ETA: 00:00:00 | 100%
[edit system]
user@switch# show
root-authentication {
```



```
ssh-rsa "1024 35 9727638204084251055468226757249864241630322
207404962528390382038690141584534964170019610608358722961563
475784918273603361276441874265946893207739108344813125957722
625461667999278316123500438660915866283822489746732605661192
181489539813862940327687806538169602027491641637359132693963
44008443 boojum@juniper.net"; # SECRET-DATA
}
```

An account for the user **root** is always present in the configuration. You configure the password for **root** using the **root-authentication** statement, as described in [“Configuring the Root Password” on page 1222](#).

Junos-FIPS and Common Criteria have special password requirements. FIPS and Common Criteria passwords must be between 10 and 20 characters in length. Passwords must use at least three of the five defined character sets (uppercase letters, lowercase letters, digits, punctuation marks, and other special characters). If Junos-FIPS is installed on the switch, you cannot configure passwords unless they meet this standard.

#### Related Documentation

- [Configuring Junos OS User Accounts on page 1213](#)
- [Junos OS Login Classes Overview on page 1203](#)

## Junos OS Login Classes Overview

All users who can log in to the router or switch must be in a login class. With login classes, you define the following:

- Access privileges that users have when they are logged in to the router or switch
- Commands and statements that users can and cannot specify
- How long a login session can be idle before it times out and the user is logged out

You can define any number of login classes and then apply one login class to an individual user account.

The Junos OS contains a few predefined login classes, which are listed in [Table 90 on page 1203](#). The predefined login classes cannot be modified.

**Table 90: Predefined System Login Classes**

Login Class	Permission Flag Set
<b>operator</b>	clear, network, reset, trace, and view
<b>read-only</b>	view
<b>superuser or super-user</b>	all
<b>unauthorized</b>	None



**NOTE:**

- You cannot modify a predefined login class name. If you issue the `set` command on a predefined class name, the Junos OS appends `-local` to the login class name. The following message also appears:

warning: '<class-name>' is a predefined class name; changing to '<class-name>-local'

- You cannot issue the `rename` or `copy` command on a predefined login class. Doing so results in the following error message:

error: target '<class-name>' is a predefined class

**Related Documentation**

- Defining Junos OS Login Classes
- [Defining Junos OS Login Classes on page 1235](#)
- [Understanding QFabric System Login Classes on page 1204](#)

## Understanding QFabric System Login Classes

In some cases (such as device-level troubleshooting), it is useful to log in to individual QFabric system components so you can view and manage issues on a per-device basis. This topic explains the login classes that provide individual component access within a QFabric system.



**NOTE:** Under normal operating conditions, you should manage the QFabric system as a single entity by using the QFabric system default partition command-line interface (CLI). The default partition CLI provides you with the ability to configure and monitor your entire QFabric system from a central location and should be used as the primary way to manage the system.

The QFabric system offers three special preset login classes that provide different levels of access to individual components within a QFabric system:

- **qfabric-admin**—Provides the ability to log in to individual QFabric system components and manage them. This class is equivalent to setting the following permissions: **clear**, **network**, **reset**, **trace**, **view**, and **maintenance**. To provide QFabric system component-level login and management privileges, include the **qfabric-admin** statement at the **[edit system login user *username* authentication remote-debug-permission]** hierarchy level.
- **qfabric-operator**—Provides the privilege to log in to individual QFabric system components and view component operations and configurations. This class is equivalent to the preset Junos OS class of **read-only**. To provide QFabric system component-level read-only access, include the **qfabric-operator** statement at the **[edit system login user *username* authentication remote-debug-permission]** hierarchy level.



- **qfabric-user**—Prevents access to individual QFabric system components. This class is the default setting for all QFabric system users and is equivalent to the preset Junos OS class of **unauthorized**. To prevent a user from accessing individual QFabric system components, include the **qfabric-user** statement at the **[edit system login user username authentication remote-debug-permission]** hierarchy level.

When you perform the initial setup for the Director group, you must specify a username and password for QFabric components. Once configured, this information is stored in the QFabric system and mapped to the QFabric system login classes. Such mapping allows users with the proper login class (**qfabric-admin** or **qfabric-operator**) to log in automatically to a component without being prompted for the username and password.

After you assign the **qfabric-admin** or **qfabric-operator** class to a user, the user can log in to an individual QFabric system component by issuing the **request component login component-name** command. You can access Node devices, Interconnect devices, and virtual Junos Routing Engines (diagnostics, fabric control, and fabric manager) one at a time when you issue this command. To leave the CLI prompt of a component and return to the QFabric system default partition CLI, issue the **exit** command from the component's operational mode CLI prompt.

#### Related Documentation

- [Example: Configuring QFabric System Login Classes on page 1253](#)
- [remote-debug-permission on page 1320](#)
- [request component login on page 1345](#)
- [Junos OS Login Classes Overview on page 1203](#)

## Regular Expressions for Allowing and Denying Junos OS Configuration Mode Hierarchies

Use extended regular expressions to specify which configuration mode hierarchies are denied or allowed. You specify these regular expressions in the **allow/deny-configuration-regexps** and **allow/deny-configuration** statements at the **[edit system login class]** hierarchy level, or by specifying Juniper Networks vendor-specific TACACS+ or RADIUS attributes in your authentication server's configuration. If regular expressions are received during TACACS+ or RADIUS authentication, they merge with any regular expressions configured on the local router or switch.

[Table 91 on page 1205](#) lists common regular expression operators that you can use for allowing or denying configuration mode .

Command regular expressions implement the extended (modern) regular expressions, as defined in POSIX 1003.2.

**Table 91: Configuration Mode Hierarchies—Common Regular Expression Operators**

Operator	Match
	One of two or more terms separated by the pipe. Each term must be a complete standalone expression enclosed in parentheses ( ), with no spaces between the pipe and the adjacent parentheses. For example, <b>(show system alarms) (show system software)</b> .



**Table 91: Configuration Mode Hierarchies—Common Regular Expression Operators (*continued*)**

Operator	Match
^	At the beginning of an expression, used to denote where the command begins, where there might be some ambiguity.
\$	Character at the end of a command. Used to denote a command that must be matched exactly up to that point. For example, <b>allow-commands "show interfaces\$"</b> means that the user can issue the <b>show interfaces</b> command but cannot issue <b>show interfaces detail</b> or <b>show interfaces extensive</b> .
[ ]	Range of letters or digits. To separate the start and end of a range, use a hyphen ( - ).
( )	A group of commands, indicating a complete, standalone expression to be evaluated; the result is then evaluated as part of the overall expression. Parentheses must be used in conjunction with pipe operators as explained.
*	Zero or more terms.
+	One or more terms.
.	Any character except for a space " ".

**Related Documentation**

- [Specifying Access Privileges for Junos OS Configuration Mode Hierarchies](#)
- [Specifying Access Privileges for Junos OS Configuration Mode Hierarchies on page 1238](#)

**Regular Expressions for Allowing and Denying Junos OS Operational Mode Commands**

Use extended regular expressions to specify which operational mode commands are denied or allowed. [Table 92 on page 1206](#) lists common regular expression operators that can be used in the operational mode commands. Command regular expressions implement the extended (modern) regular expressions as defined in POSIX 1003.2.

**Table 92: Common Regular Expression Operators to Allow or Deny Operational Mode Commands**

Operator	Match
	One of two or more terms separated by the pipe ( ) symbol. Each term must be a complete standalone expression enclosed in parentheses ( ), with no spaces between the pipe and the adjacent parentheses. For example, <b>(show system alarms) (show system software)</b> .
^	At the beginning of an expression, used to denote where the command begins, and where there might be some ambiguity.



Table 92: Common Regular Expression Operators to Allow or Deny Operational Mode Commands *(continued)*

Operator	Match
\$	Character at the end of a command. Used to denote a command that must be matched exactly up to that point. For example, <b>allow-commands "show interfaces\$"</b> means that the user can issue the <b>show interfaces</b> command but cannot issue the <b>show interfaces detail</b> or <b>show interfaces extensive</b> command.
[ ]	Range of letters or digits. To separate the start and end of a range, use a hyphen ( - ).
( )	A group of commands, indicating a complete, standalone expression to be evaluated; the result is then evaluated as part of the overall expression. Parentheses must always be used in conjunction with pipe operators as explained above.

If a regular expression contains a syntax error, it becomes invalid, and although the user can log in, the permission granted or denied by the regular expression does not take effect. When regular expressions configured on TACACS+ or RADIUS servers merge with regular expressions configured on the router or switch, if the final expression has a syntax error, the overall result is an invalid regular expression. If a regular expression does not contain any operators, all varieties of the command are allowed. For example, if the following statement is included in the configuration, the user can issue the commands **show interfaces detail** and **show interfaces extensive** in addition to showing an individual interface:

```
allow-commands "show interfaces";
```

- Related Documentation
- [Specifying Access Privileges for Junos OS Operational Mode Commands on page 153](#)

Special Requirements for Junos OS Plain-Text Passwords

Junos OS has special requirements when you create plain-text passwords on a router or switch. [Table 93 on page 1207](#) shows the default requirements.

Table 93: Special Requirements for Plain-Text Passwords

Junos OS	Junos-FIPS
The password must be between 6 and 128 characters long.	FIPS passwords must be between 10 and 20 characters long
You can include most character classes in a password (uppercase letters, lowercase letters, numbers, punctuation marks, and other special characters). Control characters are not recommended.	You can include most character classes in a password (uppercase letters, lowercase letters, numbers, punctuation marks, and other special characters). Control characters are not recommended.



Table 93: Special Requirements for Plain-Text Passwords (*continued*)

Junos OS	Junos-FIPS
Valid passwords must contain at least one change of case or character class.	Passwords must use at least three of the five defined character classes (uppercase letters, lowercase letters, numbers, punctuation marks, and other special characters).

You can change the requirements for plain-text passwords.

Junos OS supports the following five character classes for plain-text passwords:

- Lowercase letters
- Uppercase letters
- Numbers
- Punctuation
- Special characters: ! @ # \$ % ^ & \*, + < > ; :

Control characters are not recommended.

You can include the **plain-text-password** statement at the following hierarchy levels:

- [edit system diag-port-authentication]
- [edit system pic-console-authentication]
- [edit system root-authentication]
- [edit system login user *username* authentication]

The **change-type** statement specifies whether the password is checked for the following:

- The total number of character sets used (**character-set**)
- The total number of character set changes (**set-transitions**)

For example, the following password:

```
MyPassWd@2
```

has four character sets (uppercase letters, lowercase letters, special characters, and numbers) and seven character set changes (**M–y**, **y–P**, **P–a**, **a–W**, **W–d**, **d–@**, and **@–2**).

The **change-type** statement is optional. If you omit the **change-type** option, Junos-FIPS plain-text passwords are checked for character sets, and Junos OS plain-text passwords are checked for character set changes.

The **minimum-changes** statement specifies how many character sets or character set changes are required for the password. This statement is optional. If you do not use the **minimum-changes** statement, character sets are not checked for Junos OS. If the **change-type** statement is configured for the **character-set** option, then the **minimum-changes** value must be 5 or less, because Junos OS only supports five character sets.



The **format** statement specifies the hash algorithm (**md5**, **sha1** or **des**) for authenticating plain-text passwords. This statement is optional. For Junos OS, the default format is **md5**. For Junos-FIPS, only **sha1** is supported.

The **maximum-length** statement specifies the maximum number of characters allowed in a password. This statement is optional. By default, Junos OS passwords have no maximum; however, only the first 128 characters are significant. Junos-FIPS passwords must be 20 characters or less. The range for Junos OS maximum-length passwords is from 20 to 128 characters.

The **minimum-length** statement specifies the minimum number of characters required for a password. This statement is optional. By default, Junos OS passwords must be at least 6 characters long, and Junos-FIPS passwords must be at least 10 characters long. The range is from 6 to 20 characters.

Changes to password requirements do not take effect until the configuration is committed. When requirements change, only newly created, plain-text passwords are checked; existing passwords are not checked against the new requirements.

The default configuration for Junos OS plain-text passwords is:

```
[edit system login]
passwords {
  change-type character-sets;
  format md5;
  minimum-changes 1;
  minimum-length 6;
}
```

The default configuration for Junos-FIPS plain-text passwords is:

```
[edit system login]
passwords {
  change-type set-transitions;
  format sha1;
  maximum-length 20;
  minimum-changes 3;
  minimum-length 10;
}
```

#### Related Documentation

- [Changing the Requirements for Junos OS Plain-Text Passwords](#)
- [Configuring the Root Password](#)
- [Changing the Requirements for Junos OS Plain-Text Passwords on page 1212](#)
- [Configuring the Root Password on page 1222](#)







## CHAPTER 13

# Configuration

- [Configuration Tasks on page 1211](#)
- [Configuration Examples on page 1245](#)
- [Configuration Statements on page 1264](#)

### Configuration Tasks

---

- [Changing the Requirements for Junos OS Plain-Text Passwords on page 1212](#)
- [Configuring Access Privilege Levels on page 1212](#)
- [Configuring CLI Tips on page 1212](#)
- [Configuring Junos OS User Accounts on page 1213](#)
- [Configuring LLDP on page 1214](#)
- [Configuring the Junos OS Authentication Order for RADIUS, TACACS+, and Local Password Authentication on page 1214](#)
- [Configuring Local User Template Accounts for User Authentication on page 1215](#)
- [Configuring Management Access on page 1217](#)
- [Configuring RADIUS Accounting on page 1217](#)
- [Configuring RADIUS Authentication on page 1219](#)
- [Configuring Remote Template Accounts for User Authentication on page 1221](#)
- [Configuring the Root Password on page 1222](#)
- [Configuring SNMP on page 1223](#)
- [Configuring SSH Host Keys for Secure Copying of Data on page 1227](#)
- [Configuring SSH Service for Remote Access to the Router or Switch on page 1229](#)
- [Configuring TACACS+ Authentication on page 1231](#)
- [Configuring TACACS+ System Accounting on page 1233](#)
- [Defining Junos OS Login Classes on page 1235](#)
- [Limiting the Number of User Login Attempts for SSH and Telnet Sessions on page 1236](#)
- [Recovering the Root Password on page 1237](#)
- [Specifying Access Privileges for Junos OS Configuration Mode Hierarchies on page 1238](#)
- [Specifying Access Privileges for Junos OS Operational Mode Commands on page 1239](#)



- [Using Junos OS to Configure Logical System Administrators on page 1241](#)
- [Using Regular Expressions on a RADIUS or TACACS+ Server to Allow or Deny Access to Commands on page 1242](#)
- [VSA Match Conditions and Actions on page 1243](#)

## Changing the Requirements for Junos OS Plain-Text Passwords

To change the requirements for plain-text passwords, include the **password** statement at the **[edit system login]** hierarchy level:

```
[edit system login]
password {
  change-type (set-transitions | character-set);
  change-type (md5 | sha1 | des);
  maximum-length length;
  minimum-changes number;
  minimum-length length;
}
```



**NOTE:** These statements apply to plain-text passwords only, not encrypted passwords.

### Related Documentation

- [Special Requirements for Junos OS Plain-Text Passwords on page 1207](#)
- [Configuring the Root Password on page 1222](#)

## Configuring Access Privilege Levels

Each top-level command-line interface (CLI) command and each configuration statement have an access privilege level associated with it. Users can execute only those commands and configure and view only those statements for which they have access privileges.

To configure access privilege levels, include the **permissions** statement at the **[edit system login class *class-name*]** hierarchy level:

```
[edit system login class class-name]
permissions [ permissions ];
```

### Related Documentation

- [Example: Configuring Access Privilege Levels on page 1246](#)
- [Understanding Junos OS Access Privilege Levels on page 1192](#)
- [Specifying Access Privileges for Junos OS Operational Mode Commands on page 153](#)
- `permissions`

## Configuring CLI Tips

The Junos OS CLI provides the option of configuring CLI tips for the user. By default, the **tip** command is not enabled when a user logs in.



- To enable tips, include the **login-tip** statement at the **[edit system login class *class-name*]** hierarchy level:

```
[edit system login class class-name]
login-tip;
```

Adding this statement enables the **tip** command for the class specified, provided the user logs in using the CLI.

**Related  
Documentation**

- [CLI User Interface Overview on page 46](#)
- [Defining Junos OS Login Classes](#)
- [login-tip on page 233](#)

## Configuring Junos OS User Accounts

User accounts provide one way for users to access the router or switch. For each account, you define the login name for the user and, optionally, information that identifies the user. After you have created an account, the software creates a home directory for the user.

To create user accounts, include the **user** statement at the **[edit system login]** hierarchy level:

```
[edit system login]
user username {
  class class-name;
  class {
    (encrypted-password "password" | plain-text-password);
    ssh-rsa "public-key";
    ssh-dsa "public-key";
  }
  full-name complete-name;
  uid uid-value;
  class class-name;
}
```

**Related  
Documentation**

- [Example: Configuring User Accounts on page 1250](#)
- [Example: Configuring User Login Accounts on page 1261](#)
- [Junos OS User Accounts Overview on page 1201](#)
- [Limiting the Number of User Login Attempts for SSH and Telnet Sessions on page 1236](#)



## Configuring LLDP

QFX Series products use Link Layer Discovery Protocol (LLDP) and Link Layer Discovery Protocol Media Endpoint Discovery (LLDP-MED) to learn and distribute device information on network links. The information allows the switch to identify a variety of devices quickly. The result is a LAN that interoperates smoothly and efficiently.

The LLDP protocol cannot be enabled by issuing the **set protocols lldp** statement at the **[edit]** hierarchy level. Enable the LLDP protocol by configuring it on all interfaces or on specific interfaces.

To configure basic LLDP options using the CLI:

1. Configure the advertisement interval in seconds:

```
[edit protocols lldp]
user@switch# set advertisement-interval 45
```

2. Specify the multiplier used in combination with the **advertisement-interval** value to determine the length of time LLDP information is held before it is discarded:

```
[edit protocols lldp]
user@switch# set hold-multiplier 5
```

3. Configure LLDP on all interfaces or on a specific interface:

```
[edit protocols lldp]
user@switch# set interface (LLDP) all
```

4. Configure tracing operations for the LLDP protocol:

```
[edit protocols lldp]
user@switch# set traceoptions file lldptrace
```

### Related Documentation

## Configuring the Junos OS Authentication Order for RADIUS, TACACS+, and Local Password Authentication

Using the **authentication-order** statement, you can prioritize the order in which the Junos OS tries the different authentication methods when verifying user access to a router or switch.

To configure the authentication order, include the **authentication-order** statement at the **[edit system]** hierarchy level:

```
[edit system]
authentication-order [ authentication-methods ];
```

Specify one or more of the following authentication methods in the preferred order, from first tried to last tried:

- **radius**—Verify the user using RADIUS authentication services
- **tacplus**—Verify the user using TACACS+ authentication services.
- **password**—Verify the user using the username and password configured locally by including the authentication statement at the **[edit system login user]** hierarchy level.



The CHAP authentication sequence cannot take more than 30 seconds. If it takes longer to authenticate a client, the authentication is abandoned and a new sequence is initiated.

For example, if you configure three RADIUS servers so that the router or switch attempts to contact each server three times, and with each retry the server times out after 3 seconds, then the maximum time given to the RADIUS authentication method before CHAP considers it a failure is 27 seconds. If you add more RADIUS servers to this configuration, they might not be contacted because the authentication process might be abandoned before these servers are tried.

The Junos OS enforces a limit on the number of standing authentication server requests that the CHAP authentication can have at one time. Thus, an authentication server method—RADIUS, for example—might fail to authenticate a client when this limit is exceeded. If it fails, the authentication sequence is reinitiated by the router or switch until authentication succeeds and the link is brought up. However, if the RADIUS servers are not available and if additional authentication methods such as **tacplus** or **password** are configured along with **radius**, the next authentication method is tried.

The following example shows how to configure **radius** and **password** authentication:

```
[edit system]
user@switch# authentication-order [ radius password ];
```

The following example shows how to delete the **radius** statement from the authentication order:

```
[edit system]
user@switch# delete authentication-order radius
```

The following example shows how to insert the **tacplus** statement after the **radius** statement:

```
[edit system]
user@switch# insert authentication-order tacplus after radius
```

#### Related Documentation

- [Junos OS Authentication Order for RADIUS, TACACS+, and Password Authentication on page 1196](#)
- [Using Regular Expressions on a RADIUS or TACACS+ Server to Allow or Deny Access to Commands on page 1242](#)
- [Example: Configuring System Authentication for RADIUS, TACACS+, and Password Authentication on page 1251](#)
- `authentication-order`

## Configuring Local User Template Accounts for User Authentication

You use local user template accounts when you need different types of templates for authentication. Each template can define a different set of permissions appropriate for the group of users who use that template. These templates are defined locally on the router and referenced by the TACACS+ and RADIUS authentication servers.

When you configure local user templates and a user logs in, the Junos OS issues a request to the authentication server to authenticate the user's login name. If a user is



authenticated, the server returns the local username to the Junos OS, which then determines whether a local username is specified for that login name (**local-username** for TACACS+, **Juniper-Local-User** for RADIUS). If so, the Junos OS selects the appropriate local user template locally configured on the router. If a local user template does not exist for the authenticated user, the router defaults to the **remote** template.

To configure different access privileges for users who share the local user template account, include the **allow-commands** and **deny-commands** commands in the authentication server configuration file.

To configure a local user template, include the **user local-username** statement at the **[edit system login]** hierarchy level and specify the privileges you want to grant to the local users to whom the template applies:

```
[edit system login]
user local-username {
  full-name "Local user account";
  uid uid-value;
  class class-name;
}
```

This example configures the **sales** and **engineering** local user templates:

```
[edit]
system {
  login {
    user sales {
      uid uid-value;
      class class-name;
    }
    user engineering {
      uid uid-value;
      class class-name;
    }
  }
}

user = simon {
  ...
  service = junos-exec {
    local-user-name = sales
    allow-commands = "configure"
    deny-commands = "shutdown"
  }
}

user = rob {
  ...
  service = junos-exec {
    local-user-name = sales
    allow-commands = "(request system) | (show rip neighbor)"
    deny-commands = "clear"
  }
}

user = harold {
  ...
  service = junos-exec {
```



```

        local-user-name = engineering
        allow-commands = "monitor | help | show | ping | traceroute"
        deny-commands = "configure"
    }
}
user = jim {
    ...
    service = junos-exec {
        local-user-name = engineering
        allow-commands = "show bgp neighbor"
        deny-commands = "telnet | ssh"
    }
}

```

When the login users Simon and Rob are authenticated, the switch applies the sales local user template. When login users Harold and Jim are authenticated, the switch applies the engineering local user template.

#### Related Documentation

- [Overview of Template Accounts for RADIUS and TACACS+ Authentication on page 1185](#)
- [user \(Access\)](#)
- [user \(Access\) on page 276](#)

## Configuring Management Access

To define the management access settings for the routing platform:

1. Next to Allow Telnet Access, select the check box to allow remote Telnet access to the routing platform.
2. Next to Allow SSH Access, selected the check box to allow remote SSH access to the routing platform.
3. Click **Apply** to apply the configuration.

## Configuring RADIUS Accounting

RADIUS accounting supports collecting statistical data about users logging in to or out of a LAN and sending to a RADIUS accounting server. The statistical data gathered can be used for general network monitoring, to analyze and track usage patterns, or to bill a user based upon the amount of time or type of services accessed.

To configure basic RADIUS accounting using the CLI:

1. Specify the accounting servers to which the switch forwards accounting statistics:

```

[edit access]
user@switch# set profile profile1 radius accounting-server [122.69.1.250 122.69.1.252]

```

2. Define the RADIUS accounting servers:

```

[edit access]
user@switch# set radius-server 122.69.1.250 secret juniper
user@switch# set radius-server 122.69.1.252 secret juniper1

```

3. Enable accounting for an access profile:

```

[edit access]

```



- ```

user@switch# set profile profile1 accounting

```
- Configure the RADIUS servers to use while sending accounting messages and updates:
 

```

[edit access]
user@switch# set profile profile1 accounting order radius none

```
  - Configure the statistics to be collected on the switch and forwarded to the accounting server:
 

```

[edit access]
user@switch# set profile profile1 accounting order accounting-stop-on-access-deny
user@switch# set profile profile1 accounting order accounting-stop-on-failure

```
  - Display accounting statistics collected on the switch:
 

```

user@switch> show network-access aaa statistics accounting
Accounting module statistics
  Requests received: 1
  Accounting Response failures: 0
  Accounting Response Success: 1
  Requests timedout: 0

```
  - Open an accounting log on the RADIUS accounting server using the server's address, and view accounting statistics:
 

```

[root@freeradius]# cd /usr/local/var/log/radius/radacct/122.69.1.250
[root@freeradius 122.69.1.250]# ls

detail-20071214

[root@freeradius 122.69.1.250]# vi details-20071214

User-Name = "000347e1bab9"
NAS-Port = 67
Acct-Status-Type = Stop
Acct-Session-Id = "802.1x811912"
Acct-Input-Octets = 17454
Acct-Output-Octets = 4245
Acct-Session-Time = 1221041249
Acct-Input-Packets = 72
Acct-Output-Packets = 53
Acct-Terminate-Cause = Lost-Carrier
Acct-Input-Gigawords = 0
Acct-Output-Gigawords = 0
Called-Station-Id = "00-19-e2-50-52-60"
Calling-Station-Id = "00-03-47-e1-ba-b9"
Event-Timestamp = "Sep 10 2008 16:52:39 PDT"
NAS-Identifier = "esp48t-1b-01"
NAS-Port-Type = Virtual

User-Name = "000347e1bab9"
NAS-Port = 67
Acct-Status-Type = Start
Acct-Session-Id = "802.1x811219"
Called-Station-Id = "00-19-e2-50-52-60"
Calling-Station-Id = "00-03-47-e1-ba-b9"
Event-Timestamp = "Sep 10 2008 18:58:52 PDT"
NAS-Identifier = "esp48t-1b-01"
NAS-Port-Type = Virtual

```

**Related Documentation**

- [Understanding RADIUS Accounting on page 1187](#)



## Configuring RADIUS Authentication

RADIUS authentication is a method of authenticating users who attempt to access the router or switch. Tasks to configure RADIUS authentication are:

- [Configuring RADIUS Server Details on page 1219](#)
- [Configuring MS-CHAPv2 for Password-Change Support on page 1220](#)
- [Specifying a Source Address for the Junos OS to Access External RADIUS Servers on page 1220](#)

### Configuring RADIUS Server Details

To use RADIUS authentication on the router or switch, configure information about one or more RADIUS servers on the network by including one **radius-server** statement at the **[edit system]** hierarchy level for each RADIUS server:

```
[edit system]
radius-server server-address {
  accounting-port port-number;
  port number;
  retry number;
  secret password;
  source-address source-address;
  timeout seconds;
}
```

**server-address** is the address of the RADIUS server.

You can specify a port on which to contact the RADIUS server. By default, port number **1812** is used (as specified in RFC 2865). You can also specify an accounting port to send accounting packets. The default is **1813** (as specified in RFC 2866).

You must specify a password in the **secret password** statement. If the password contains spaces, enclose it in quotation marks. The secret used by the local router or switch must match that used by the server.

Optionally, you can specify the amount of time that the local router or switch waits to receive a response from a RADIUS server (in the **timeout** statement) and the number of times that the router or switch attempts to contact a RADIUS authentication server (in the **retry** statement). By default, the router or switch waits 3 seconds. You can configure this to be a value from 1 through 90 seconds. By default, the router or switch retries connecting to the server three times. You can configure this to be a value from 1 through 10 times.

You can use the **source-address** statement to specify a logical address for individual or multiple RADIUS servers.

To configure multiple RADIUS servers, include multiple **radius-server** statements.

To configure a set of users that share a single account for authorization purposes, you create a template user. To do this, include the **user** statement at the **[edit system login]**



hierarchy level, as described in [“Overview of Template Accounts for RADIUS and TACACS+ Authentication” on page 1185](#).

You can also configure RADIUS authentication at the **[edit access]** and **[edit access profile]** hierarchy level. Junos OS uses the following search order to determine which set of servers are used for authentication:

1. **[edit access profile *profile-name* radius-server *server-address*]**
2. **[edit access radius-server *server-address*]**
3. **[edit system radius-server *server-address*]**

---

### Configuring MS-CHAPv2 for Password-Change Support

You can configure the Microsoft implementation of the Challenge Handshake Authentication Protocol version 2 (MS-CHAPv2) on the router or switch to support changing of passwords. This feature provides users accessing a router or switch the option of changing the password when the password expires, is reset, or is configured to be changed at the next login.

Before you configure MS-CHAPv2 for password-change support, ensure that you:

- Configure the RADIUS server authentication parameters
- Set the **authentication-order** to use the RADIUS server for the initial password attempt

To configure MS-CHAP-v2, include the following statements at the **[edit system radius-options]** hierarchy level:

```
[edit system radius-options]
password-protocol mschap-v2;
```

The following example shows statements for configuring the MS-CHAPv2 password protocol, password authentication order, and user accounts:

```
[edit]
system {
  authentication-order [ radius password ];
  radius-server {
    192.168.69.149 secret "$9$G-j.5Qz6tpBk.1hrlXxUjiq5Qn/C"; ## SECRET-DATA
  }
  radius-options {
    password-protocol mschap-v2;
  }
  login {
    user bob {
      class operator;
    }
  }
}
```

---

### Specifying a Source Address for the Junos OS to Access External RADIUS Servers

You can specify which source address Junos OS uses when accessing your network to contact an external RADIUS server for authentication. You can also specify which source



address Junos OS uses when contacting a RADIUS server for sending accounting information.

To specify a source address for a RADIUS server, include the **source-address** statement at the **[edit system radius-server server-address]** hierarchy level:

```
[edit system radius-server server-address]
  source-address source-address;
```

**source-address** is a valid IP address configured on one of the router or switch interfaces.

#### Related Documentation

- [Example: Configuring RADIUS Authentication on page 1247](#)
- [Example: Configuring System Authentication for RADIUS, TACACS+, and Password Authentication on page 1251](#)
- [Juniper Networks Vendor-Specific RADIUS Attributes on page 1188](#)
- [Overview of Template Accounts for RADIUS and TACACS+ Authentication on page 1185](#)
- [Example: Configuring RADIUS Template Accounts on page 1261](#)
- [Using Regular Expressions on a RADIUS or TACACS+ Server to Allow or Deny Access to Commands on page 1242](#)
- [Junos OS User Authentication Methods on page 1201](#)

## Configuring Remote Template Accounts for User Authentication

By default, the Junos OS uses remote template accounts for user authentication when:

- The authenticated user does not exist locally on the router or switch.
- The authenticated user's record in the authentication server specifies local user, or the specified local user does not exist locally on the router or switch.

To configure the remote template account, include the **user remote** statement at the **[edit system login]** hierarchy level and specify the privileges you want to grant to remote users:

```
[edit system login]
  user remote {
    full-name "All remote users";
    uid uid-value;
    class class-name;
  }
```

To configure different access privileges for users who share the remote template account, include the **allow-commands** and **deny-commands** statements in the authentication server configuration file.

#### Related Documentation

- [Overview of Template Accounts for RADIUS and TACACS+ Authentication on page 1185](#)
- [user \(Access\)](#)
- [user \(Access\) on page 276](#)



## Configuring the Root Password

Junos OS is preinstalled on the router or switch. When the router or switch is powered on, it is ready to be configured. Initially, you log in as the user “root” with no password.



**NOTE:** If you configure a blank password using the `encrypted-password` statement at the `[edit system root-authentication]` hierarchy level for root authentication, you can commit a configuration, but you are *not* able to log in as superuser and gain root level access to the router or switch.

After you log in, you should configure the root (superuser) password by including the `root-authentication` statement at the `[edit system]` hierarchy level:

```
[edit system]
root-authentication {
  (encrypted-password "password"| plain-text-password);
  ssh-dsa "public-key";
  ssh-rsa "public-key";
}
```

If you configure the `plain-text-password` option, you are prompted to enter and confirm the password:

```
[edit system]
user@switch# set root-authentication plain-text-password
New password: type password here
Retype new password: retype password here
```

To load an SSH key file, enter the `load-key-file` statement. This statement loads RSA (SSH version 1 and SSH version 2) and DSA (SSH version 2) public keys.

You can also configure SSH RSA keys and SSH DSA keys to authenticate root logins. You can configure more than one public RSA or DSA key for SSH authentication of root logins as well as for user accounts. When a user logs in as root, the public keys are referenced to determine whether the private key matches any of them.

If you load the SSH keys file, the contents of the file are copied into the configuration immediately after you enter the `load-key-file` statement. To view the SSH keys entries, use the configuration mode `show` command. For example:

```
[edit system]
user@switch# set root-authentication load-key-file my-host::ssh/identity.pub
.file.19692 | 0 KB | 0.3 kB/s | ETA: 00:00:00 | 100%
[edit system]
user@switch# show
root-authentication {
  ssh-rsa "1024 35 9727638204084251055468226757249864241630322
20740496252839038203869014158453496417001961060835872296
15634757491827360336127644187426594689320773910834481012
68312595772262546166799927831612350043866091586628382248
97467326056611921489539813965561563786211940327687806538
16960202749164163735913269396344008443 boojum@juniper.net"; #
```



```
SECRET-DATA
}
```

Junos-FIPS software has special password requirements. FIPS passwords must be between 10 and 20 characters in length. Passwords must use at least three of the five defined character sets (uppercase letters, lowercase letters, digits, punctuation marks, and other special characters). If Junos-FIPS is installed on the router or switch, you cannot configure passwords unless they meet this standard. If you use the **encrypted-password** option, then a null-password (empty) is not permitted.

You cannot configure a blank password for **encrypted-password** using blank quotation marks (" "). You must configure a password whose number of characters range from 1 through 128 characters and enclose the password in quotation marks.

#### Related Documentation

- [Recovering the Root Password on page 1105](#)
- [Example: Configuring the Root Password on page 1249](#)
- [Example: Configuring a Plain-Text Password for Root Logins on page 1247](#)
- [Example: Configuring SSH Authentication for Root Logins on page 1249](#)

## Configuring SNMP

SNMP is implemented in the Junos OS Software running on the QFX Series products. By default, SNMP is not enabled. To enable SNMP, you must include the SNMP configuration statements at the **[edit]** hierarchy level.

To configure the minimum requirements for SNMP, include the following statements at the **[edit]** hierarchy level of the configuration:

```
[edit]
snmp {
  community public;
}
```

To configure complete SNMP features, include the following statements at the **[edit]** hierarchy level of the configuration:

```
snmp {
  client-list client-list-name {
    ip-addresses;
  }
  community community-name {
    authorization authorization;
    client-list-name client-list-name;
    clients {
      address restrict;
    }
    view view-name;
  }
  contact contact;
  description description;
  filter-duplicates;
  filter-interfaces;
```



```
health-monitor {
  falling-threshold integer;
  interval seconds;
  rising-threshold integer;
}
interface [ interface-names ];
location location;
name name;
nonvolatile {
  commit-delay seconds;
}
rmon {
  alarm index {
    description description;
    falling-event-index index;
    falling-threshold integer;
    falling-threshold-interval seconds;
    interval seconds;
    request-type;
    rising-event-index index;
    rising-threshold integer;
    sample-type (absolute-value | delta-value);
    startup-alarm (falling-alarm | rising-alarm | rising-or-falling alarm);
    syslog-subtag syslog-subtag;
    variable oid-variable;
  }
  event index {
    community community-name;
    description description;
    type type;
  }
  history history-index {
    bucket-size number;
    interface interface-name;
    interval seconds;
    owner owner-name;
  }
}
traceoptions {
  file filename <files number> <size size> <world-readable | no-world-readable> <match
    regular-expression>;
  flag flag;
}
trap-group group-name {
  categories {
    category;
  }
  destination-port port-number;
  targets {
    address;
  }
  version (all | v1 | v2);
}
trap-options {
  agent-address outgoing-interface;
  source-address address;
```



```

}
v3 {
  notify name {
    tag tag-name;
    type trap;
  }
  notify-filter profile-name {
    oid object-identifier (include | exclude);
  }
  snmp-community community-index {
    community-name community-name;
    security-name security-name;
    tag tag-name;
  }
  target-address target-address-name {
    address address;
    address-mask address-mask;
    port port-number;
    retry-count number;
    tag-list tag-list;
    target-parameters target-parameters-name;
    timeout seconds;
  }
  target-parameters target-parameters-name {
    notify-filter profile-name;
    parameters {
      message-processing-model (v1 | v2c | V3);
      security-level (authentication | none | privacy);
      security-model (usm | v1 | v2c);
      security-name security-name;
    }
  }
}
usm {
  local-engine {
    user username {
      authentication-sha {
        authentication-password authentication-password;
      }
      authentication-md5 {
        authentication-password authentication-password;
      }
      authentication-none;
      privacy-aes128 {
        privacy-password privacy-password;
      }
      privacy-des {
        privacy-password privacy-password;
      }
      privacy-3des {
        privacy-password privacy-password;
      }
      privacy-none;
    }
  }
  remote-engine engine-id {
    user username {

```



```

    authentication-sha {
        authentication-password authentication-password;
    }
    authentication-md5 {
        authentication-password authentication-password;
    }
    authentication-none;
    privacy-aes128 {
        privacy-password privacy-password;
    }
    privacy-des {
        privacy-password privacy-password;
    }
    privacy-3des {
        privacy-password privacy-password;
    }
    privacy-none {
        privacy-password privacy-password;
    }
}
}
}
vacm {
    access {
        group group-name {
            (default-context-prefix | context-prefix context-prefix) {
                security-model (any | usm | v1 | v2c) {
                    security-level (authentication | none | privacy) {
                        notify-view view-name;
                        read-view view-name;
                        write-view view-name;
                    }
                }
            }
        }
    }
}
security-to-group {
    security-model (usm | v1 | v2c) {
        security-name security-name {
            group group-name;
        }
    }
}
}
}
view view-name {
    oid object-identifier (include | exclude);
}
}

```

- Related Documentation**
- [Understanding the Implementation of SNMP on page 5459](#)
  - [snmp on page 1325](#)



## Configuring SSH Host Keys for Secure Copying of Data

Secure Shell (SSH) uses encryption algorithms to generate a host, server, and session key system that ensures secure data transfer. You can configure SSH host keys to support secure copy (SCP) as an alternative to FTP for the background transfer of data such as configuration archives and event logs. To configure SSH support for SCP, you must complete the following tasks:

- Specify SSH known hosts by including hostnames and host key information in the Routing Engine configuration hierarchy.
- Set an SCP URL to specify the host from which to receive data. Setting this attribute automatically retrieves SSH host key information from the SCP server.
- Verify that the host key is authentic.
- Accept the secure connection. Accepting this connection automatically stores host key information in the local host key database. Storing host key information in the configuration hierarchy automates the secure handshake and allows background data transfer using SCP.

Tasks to configure SSH host keys for secure copying of data are:

1. [Configuring SSH Known Hosts on page 1227](#)
2. [Configuring Support for SCP File Transfer on page 1228](#)
3. [Updating SSH Host Key Information on page 1228](#)

### Configuring SSH Known Hosts

To configure SSH known hosts, include the **host** statement, and specify hostname and host key options for trusted servers at the **[edit security ssh-known-hosts]** hierarchy level:

```
[edit security ssh-known-hosts]
host corporate-archive-server, ip-address {
    dsa-key key;
}
host archive-server-url {
    rsa-key key;
}
host server-with-ssh-version-1, ip-address {
    rsa1-key key;
}
```

Host keys are one of the following:

- **dsa-key**—Base64 encoded Digital Signature Algorithm (DSA) key.
- **rsa-key**—Base64 encoded RSA public key algorithm, which supports encryption and digital signatures.
- **rsa1-key**—Base64 encoded RSA public key algorithm, which supports encryption and digital signatures for SSH version 1 and SSH version 2.



## Configuring Support for SCP File Transfer

To configure a known host to support background SCP file transfers, include the **archive-sites** statement at the **[edit system archival configuration]** hierarchy level.

```
[edit system archival configuration]
archive-sites {
  scp://username<:password>@host<:port>/url-path;
}
```



**NOTE:** When specifying a URL in a Junos OS statement using an IPv6 host address, you must enclose the entire URL in quotation marks ( " ") and enclose the IPv6 host address in brackets ( [ ] ). For example, "scp://username<:password>@[host]<:port>/url-path";

Setting the **archive-sites** statement to point to an SCP URL triggers automatic host key retrieval. At this point, Junos OS connects to the SCP host to fetch the SSH public key, displays the host key message digest or fingerprint as output to the console, and terminates the connection to the server.

```
user@switch# set system archival configuration archive-sites "<scp-url-path>"
The authenticity of host <my-archive-server (<server-ip-address>)> can't be established.
RSA key fingerprint is <ascii-text key>. Are you sure you want to continue connecting
(yes/no)?
```

To verify that the host key is authentic, compare this fingerprint with a fingerprint that you obtain from the same host using a trusted source. If the fingerprints are identical, accept the host key by entering **yes** at the prompt. The host key information is then stored in the Routing Engine configuration and supports background data transfers using SCP.

## Updating SSH Host Key Information

Typically, SSH host key information is automatically retrieved when you set a URL attribute for SCP using the **archival configuration archive-sites** statement at the **[edit system]** hierarchy level. However, if you need to manually update the host key database, use one of the following methods.

1. [Retrieving Host Key Information Manually on page 1228](#)
2. [Importing Host Key Information from a File on page 1228](#)

### Retrieving Host Key Information Manually

To manually retrieve SSH public host key information, use the **fetch-from-server** option with the **set security ssh-known-hosts** command. You must include a hostname attribute with the **set security ssh-known-hosts fetch-from-server** command to specify the host from which to retrieve the SSH public key.

```
user@switch# set security ssh-known-hosts fetch-from-server <hostname>
```

### Importing Host Key Information from a File

To manually import SSH host key information from the known-hosts file located at **/var/tmp/known-hosts** on the server, include the **load-key-file** option with the **set security**



**ssh-known-hosts** command. You must include the path to the **known-hosts** file with the **set security ssh-known-hosts load-key-file** command to specify the location from which to import host key information.

```
user@switch# set security ssh-known-hosts load-key-file /var/tmp/known-hosts
```

## Configuring SSH Service for Remote Access to the Router or Switch

To configure the router or switch to accept SSH as an access service, include the **ssh** statement at the **[edit system services]** hierarchy level:

```
[edit system services]
ssh {
  ciphers [ cipher-1 cipher-2 cipher-3 ...]
  client-alive-count-max number;
  client-alive-interval seconds;
  connection-limit limit;
  hostkey-algorithm <algorithm | no-algorithm>;
  key-exchange algorithm;
  macs algorithm;
  max-sessions-per-connection number;
  no-tcp-forwarding;
  protocol-version [v1 v2];
  rate-limit limit;
  root-login <allow | deny | deny-password>;
}
```

By default, the router or switch supports a limited number of simultaneous SSH sessions and connection attempts per minute. Use the following statements to change the defaults:

- **connection-limit *limit***—Maximum number of simultaneous connections per protocol (IPv4 and IPv6). The range is a value from 1 through 250. The default is 75. When you configure a connection limit, the limit is applicable to the number of SSH sessions per protocol (IPv4 and IPv6). For example, a connection limit of 10 allows 10 IPv6 SSH sessions and 10 IPv4 SSH sessions.
- **max-sessions-per-connection *number***—Include this statement to specify the maximum number of SSH sessions allowed per single SSH connection. This allows you to limit the number of cloned sessions tunneled within a single SSH connection. The default value is 10.
- **rate-limit *limit***—Maximum number of connection attempts accepted per minute (a value from 1 through 250). The default is 150. When you configure a rate limit, the limit is applicable to the number of connection attempts per protocol (IPv4 and IPv6). For example, a rate limit of 10 allows 10 IPv6 SSH session connection attempts per minute and 10 IPv4 SSH session connection attempts per minute.

For information about other configuration settings, see the following topics:

- [Configuring the Root Login Through SSH on page 1230](#)
- [Configuring the SSH Protocol Version on page 1230](#)
- [Configuring the Client Alive Mechanism on page 1230](#)



### Configuring the Root Login Through SSH

---

By default, users are allowed to log in to the router or switch as **root** through SSH. To control user access through SSH, include the **root-login** statement at the **[edit system services ssh]** hierarchy level:

```
[edit system services ssh]
root-login (allow | deny | deny-password);
```

**allow**—Allows users to log in to the router or switch as root through SSH. The default is **allow**.

**deny**—Disables users from logging in to the router or switch as root through SSH.

**deny-password**—Allows users to log in to the router or switch as root through SSH when the authentication method (for example, RSA) does not require a password.

### Configuring the SSH Protocol Version

---

By default, both version 1 and version 2 of the SSH protocol are enabled. To configure the router or switch to use only version 1 of the SSH protocol, include the **protocol-version** statement and specify **v1** at the **[edit system services ssh]** hierarchy level:

```
[edit system services ssh]
protocol-version [ v1 ];
```

To configure the router or switch to use only version 2 of the SSH protocol, include the **protocol-version** statement and specify **v2** at the **[edit system services ssh]** hierarchy level:

```
[edit system services ssh]
protocol-version [ v2 ];
```

To explicitly configure the router or switch to use version 1 and 2 of the SSH protocol, include the **protocol-version** statement and specify **v1** and **v2** at the **[edit system services ssh]** hierarchy level:

```
[edit system services ssh]
protocol-version [ v1 v2 ];
```

For J Series Services Routers, the export license software supports SSH version 1 only.

### Configuring the Client Alive Mechanism

---

The client alive mechanism is valuable when the client or server depends on knowing when a connection has become inactive. It differs from the standard keepalive mechanism because the client alive messages are sent through the encrypted channel. The client alive mechanism is not enabled at default. To enable it, configure the **client-alive-count-max** and the **client-alive-interval**. This option applies to SSH protocol version 2 only.

In the following example, unresponsive SSH clients will be disconnected after approximately 100 seconds (20 x 5).

```
[edit system services ssh]
```



```
client-alive-count-max 5;
client-alive-interval 20;
```

## Configuring TACACS+ Authentication

TACACS+ authentication is a method of authenticating users who attempt to access the router or switch. Tasks to configure TACACS+ configuration are:

- [Configuring TACACS+ Server Details on page 1231](#)
- [Specifying a Source Address for the Junos OS to Access External TACACS+ Servers on page 1232](#)
- [Configuring the Same Authentication Service for Multiple TACACS+ Servers on page 1232](#)
- [Configuring Juniper Networks Vendor-Specific TACACS+ Attributes on page 1233](#)

### Configuring TACACS+ Server Details

To use TACACS+ authentication on the router or switch, configure information about one or more TACACS+ servers on the network by including the **tacplus-server** statement at the **[edit system]** hierarchy level:

```
[edit system]
tacplus-server server-address {
  port port-number;
  secret password;
  single-connection;
  timeout seconds;
}
```

**server-address** is the address of the TACACS+ server.

**port-number** is the TACACS+ server port number.

You must specify a secret (password) by using the **secret** statement. The local router or switch passes the **secret** to the TACACS+ client. If the password included spaces, enclose the password in quotation marks. The secret used by the local router or switch must match that used by the server.

Optionally, you can specify the length of time that the local router or switch waits to receive a response from a TACACS+ server by including the **timeout** statement. By default, the router or switch waits 3 seconds. You can configure this to be a value in the range from 1 through 90 seconds.

Optionally, you can use the **single-connection** statement to have the software maintain one open Transmission Control Protocol (TCP) connection to the server for multiple requests, rather than opening a connection for each connection attempt.



**NOTE:** Early versions of the TACACS+ server do not support the **single-connection** option. If you specify this option and the server does not support it, Junos OS will be unable to communicate with that TACACS+ server.



To configure multiple TACACS+ servers, include multiple **tacplus-server** statements.

On a TX Matrix router, TACACS+ accounting should be configured only under the groups **re0** and **re1**.



**NOTE:** Accounting should not be configured at the **[edit system]** hierarchy level; on a TX Matrix router, control is done under the switch-card chassis only.

To configure a set of users that share a single account for authorization purposes, you create a template user. To do this, include the **user** statement at the **[edit system login]** hierarchy level.

### Specifying a Source Address for the Junos OS to Access External TACACS+ Servers

You can specify which source address Junos OS uses when accessing your network to contact an external TACACS+ server for authentication. You can also specify which source address Junos OS uses when contacting a TACACS+ server for sending accounting information.

To specify a source address for a TACACS+ server for authentication, include the **source-address** statement at the **[edit system tacplus-server server-address]** hierarchy level:

```
[edit system tacplus-server server-address]
source-address source-address;
```

**source-address** is a valid IP address configured on one of the router or switch interfaces.

To specify a source address for a TACACS+ server for system accounting, include the **source-address** statement at the **[edit system accounting destination tacplus server server-address]** hierarchy level:

```
[edit system accounting destination tacplus server server-address]
source-address source-address;
```

**source-address** is a valid IP address configured on one of the router or switch interfaces.

### Configuring the Same Authentication Service for Multiple TACACS+ Servers

To configure the same authentication service for multiple TACACS+ servers, include statements at the **[edit system tacplus-server]** and **[edit system tacplus-options]** hierarchy levels. For information about how to configure a TACACS+ server at the **[edit system tacplus-server]** hierarchy level.

To assign the same authentication service to multiple TACACS+ servers, include the **service-name** statement at the **[edit system tacplus-options]** hierarchy level:

```
[edit system tacplus-options]
service-name service-name;
```

**service-name** is the name of the authentication service. By default, the service name is set to **junos-exec**.



The following example shows how to configure the same authentication service for multiple TACACS+ servers:

```
[edit system]
tacplus-server {
  10.2.2.2 secret "$9$2dgoJGDiqP5ZG9A"; ## SECRET-DATA
  10.3.3.3 secret "$9$2dgoJGDiqP5ZG9A"; ## SECRET-DATA
}
tacplus-options {
  service-name bob;
}
```

### Configuring Juniper Networks Vendor-Specific TACACS+ Attributes

The Juniper Networks vendor-specific TACACS+ attributes enable you to configure access privileges for users on a TACACS+ server. They are specified in the TACACS+ server configuration file on a per-user basis. Junos OS retrieves these attributes through an authorization request of the TACACS+ server after authenticating a user. You do not need to configure these attributes to run Junos OS with TACACS+.

To specify these attributes, include a **service** statement of the following form in the TACACS+ server configuration file:

```
service = junos-exec {
  local-user-name = <username-local-to-router>
  allow-commands = "<allow-commands-regex>"
  allow-configuration = "<allow-configuration-regex>"
  deny-commands = "<deny-commands-regex>"
  deny-configuration = "<deny-configuration-regex>"
}
```

This **service** statement can appear in a **user** or **group** statement.

#### Related Documentation

- [Using Regular Expressions on a RADIUS or TACACS+ Server to Allow or Deny Access to Commands on page 1242](#)
- [Example: Configuring System Authentication for RADIUS, TACACS+, and Password Authentication on page 1251](#)
- [Juniper Networks Vendor-Specific TACACS+ Attributes on page 1190](#)
- [Overview of Template Accounts for RADIUS and TACACS+ Authentication on page 1185](#)
- [Junos OS User Authentication Methods on page 1201](#)

### Configuring TACACS+ System Accounting

You can use TACACS+ to track and log software logins, configuration changes, and interactive commands. To audit these events, include the following statements at the **[edit system accounting]** hierarchy level:

```
[edit system accounting]
events [ events ];
destination {
  tacplus {
    server {
```



```
server-address {  
    port port-number;  
    secret password;  
    single-connection;  
    timeout seconds;  
}  
}  
}
```

Tasks for configuring TACACS+ system accounting are:

1. [Specifying TACACS+ Auditing and Accounting Events on page 1234](#)
2. [Configuring TACACS+ Server Accounting on page 1234](#)

---

### Specifying TACACS+ Auditing and Accounting Events

To specify the events you want to audit when using a TACACS+ server for authentication, include the **events** statement at the **[edit system accounting]** hierarchy level:

```
[edit system accounting]  
events [ events ];
```

**events** is one or more of the following:

- **login**—Audit logins
- **change-log**—Audit configuration changes
- **interactive-commands**—Audit interactive commands (any command-line input)

---

### Configuring TACACS+ Server Accounting

To configure TACACS+ server accounting, include the **server** statement at the **[edit system accounting destination tacplus]** hierarchy level:

```
[edit system accounting destination tacplus]  
server {  
    server-address {  
        port port-number;  
        secret password;  
        single-connection;  
        timeout seconds;  
    }  
}
```

**server-address** specifies the address of the TACACS+ server. To configure multiple TACACS+ servers, include multiple **server** statements.



**NOTE:** If no TACACS+ servers are configured at the **[edit system accounting destination tacplus]** statement hierarchy level, Junos OS uses the TACACS+ servers configured at the **[edit system tacplus-server]** hierarchy level.

---

**port-number** specifies the TACACS+ server port number.



You must specify a secret (password) by using the **secret** statement. The local router or switch passes the **secret** to the TACACS+ client. If the password contains spaces, enclose the entire password in quotation marks (" "). The password used by the local router or switch must match that used by the server.

Optionally, you can specify the length of time that the local router or switch waits to receive a response from a TACACS+ server by including the **timeout** statement. By default, the router or switch waits 3 seconds. You can configure this to be a value in the range from 1 through 90 seconds.

Optionally, you can maintain one open TCP connection to the server for multiple requests, rather than opening a connection for each connection attempt, by including the **single-connection** statement.

To ensure that start and stop requests for accounting of login events are correctly logged in the Accounting file instead of the Administration log file on a TACACS+ server, include either the **no-cmd-attribute-value** statement or the **exclude-cmd-attribute** at the **[edit system tacplus-options]** hierarchy level.

If you use the **no-cmd-attribute-value** statement, the value of the **cmd** attribute is set to a null string in the start and stop requests. If you use the **exclude-cmd-attribute** statement, the **cmd** attribute is totally excluded from the start and stop requests. Both statements support the correct logging of accounting requests in the Accounting file, instead of the Administration file.

```
[edit system tacplus-options]
(no-cmd-attribute-value | exclude-cmd-attribute);
```

**Related Documentation**

- [Configuring TACACS+ Authentication on page 1231](#)

## Defining Junos OS Login Classes

To define a login class and its access privileges, include the **class** statement at the **[edit system login]** hierarchy level:

```
[edit system login]
class class-name {
  allow-commands "regular-expression";
  allow-configuration "regular-expression";
  deny-commands "regular-expression";
  deny-configuration "regular-expression";
  idle-timeout minutes;
  permissions [ permissions ];
}
```

**Related Documentation**

- [Junos OS Login Classes Overview on page 1203](#)
- [Junos OS User Accounts Overview on page 1201](#)
- [Example: Creating Login Classes with Specific Privileges on page 1252](#)
- [Configuring the Junos OS to Display a System Login Announcement on page 127](#)



## Limiting the Number of User Login Attempts for SSH and Telnet Sessions

You can limit the number of times a user can attempt to enter a password while logging in through SSH or Telnet. The connection is terminated if a user fails to log in after the number of attempts specified. You can also specify a delay, in seconds, before a user can try to enter a password after a failed attempt. In addition, you can specify the threshold for the number of failed attempts before the user experiences a delay in being able to enter a password again.

To specify the number of times a user can attempt to enter a password while logging in, include the **retry-options** statement at the **[edit system login]** hierarchy level:

```
[edit system login]
retry-options {
  tries-before-disconnect number;
  backoff-threshold number;
  backoff-factor seconds;
  maximum-time seconds
  minimum-time seconds;
}
```

You can configure the following options:

- **tries-before-disconnect**—Number of times a user can attempt to enter a password when logging in. The connection closes if a user fails to log in after the number specified. The range is from 1 through 10, and the default is 10.
- **backoff-threshold**—Threshold for the number of failed login attempts before the user experiences a delay in being able to enter a password again. Use the **backoff-factor** option to specify the length of the delay in seconds. The range is from 1 through 3, and the default is 2.
- **backoff-factor**—Length of time, in seconds, before a user can attempt to log in after a failed attempt. The delay increases by the value specified for each subsequent attempt after the threshold. The range is from 5 through 10, and the default is 5 seconds.
- **maximum-time seconds**—Maximum length of time, in seconds, that the connection remains open for the user to enter a username and password to log in. If the user remains idle and does not enter a username and password within the **maximum-time** value, the connection is closed. The range is from 20 through 300 seconds, and the default is 120 seconds.
- **minimum-time**—Minimum length of time, in seconds, that a connection remains open while a user is attempting to enter a correct password. The range is from 20 through 60, and the default is 40.

### Related Documentation

- [Example: Limiting the Number of Login Attempts for SSH and Telnet Sessions on page 1263](#)
- [Configuring Junos OS User Accounts on page 1213](#)



## Recovering the Root Password

If you forget the root password for the QFX3500 switch, you can use the password recovery procedure to reset the root password.



**NOTE:** The root password cannot be recovered on a QFabric system.



**NOTE:** You need console access to the switch to recover the root password.

To recover the root password:

1. Power off the switch by switching off the AC power outlet of the device or, if necessary, by pulling the power cords out of the QFX3500 switch power supplies.
2. Turn off the power to the management device, such as a PC or laptop computer, that you want to use to access the CLI.
3. Plug one end of the Ethernet rollover cable supplied with the switch into the RJ-45-to-DB-9 serial port adapter supplied with the switch.
4. Plug the RJ-45-to-DB-9 serial port adapter into the serial port on the management device.
5. Connect the other end of the Ethernet rollover cable to the console port on the switch.
6. Turn on the power to the management device.
7. On the management device, start your asynchronous terminal emulation application (such as Microsoft Windows Hyperterminal) and select the appropriate **COM** port to use (for example, **COM1**).
8. Configure the port settings as follows:
  - Bits per second: 9600
  - Data bits: 8
  - Parity: None
  - Stop bits: 1
  - Flow control: None
9. Power on the switch by (if necessary) plugging the power cords into the QFX3500 switch power supply, or turning on the power to the device or switch by switching on the AC power outlet the device is plugged into.

The terminal emulation screen on your management device displays the switch's boot sequence.

10. When the following prompt appears, press the Spacebar to access the switch's bootstrap loader command prompt:

```
Hit [Enter] to boot immediately, or space bar for command prompt.
Booting [kernel] in 9 seconds...
```



11. At the following prompt, enter **boot -s** to start up the system in single-user mode.  

```
ok boot -s
```
12. At the following prompt, enter **recovery** to start the root password recovery procedure.  

```
Enter full pathname of shell or 'recovery' for root password recovery or RETURN  
for /bin/sh: recovery
```
13. Enter configuration mode in the CLI.
14. Set the root password. For example:  

```
user@switch# set system root-authentication plain-text-password
```
15. At the following prompt, enter the new root password. For example:  

```
New password: juniper1  
Retype new password:
```
16. At the second prompt, reenter the new root password.
17. After you have finished configuring the password, commit the configuration.  

```
root@host# commit  
commit complete
```
18. Exit configuration mode in the CLI.
19. Exit operational mode in the CLI.
20. At the prompt, enter **y** to reboot the switch.  

```
Reboot the system? [y/n] y
```

**Related Documentation** • [Configuring the Root Password on page 1222](#)

## Specifying Access Privileges for Junos OS Configuration Mode Hierarchies

You can specify extended regular expressions with the **allow-configuration** and **deny-configuration** statements to define user access privileges to parts of the configuration hierarchy. Doing so overrides login class permission bits set for a user. You can also use wildcards to restrict access. When you define access privileges to parts of the configuration hierarchy, do the following tasks:

- Specify the full paths in the extended regular expressions with the **allow-configuration** and **deny-configuration** statements.
- Put parentheses around an extended regular expression that connects two or more expressions with the pipe **|** symbol. For example:

```
[edit system login class class-name]  
user@switch# set deny-configuration "(system login class) | (system services)"
```



**NOTE:** Each expression separated by a pipe (**|**) symbol must be a complete standalone expression, and must be enclosed in parentheses (**()**). Do not use spaces between regular expressions separated with parentheses and connected with the pipe (**|**) symbol. You cannot define access to keywords such as **set**, **edit**, or **activate**.

---



When you explicitly provide access to configuration mode hierarchies or regular expressions using the **allow-configuration** statement, you add to the regular permissions set with the **permissions** statement. If you explicitly deny access to configuration mode hierarchies or regular expressions using the **deny-configuration** statement, you remove permissions for the specified configuration mode hierarchy from the default permissions provided by the **permissions** statement.

To explicitly provide access to an individual configuration mode hierarchy that would otherwise be denied, include the **allow-configuration** statement at the **[edit system login class *class-name*]** hierarchy level:

```
[edit system login class class-name]
  allow-configuration "regular-expression";
```

To explicitly deny access to an individual configuration hierarchy that would otherwise be supported, include the **deny-configuration** statement at the **[edit system login class *class-name*]** hierarchy level:

```
[edit system login class class-name]
  deny-configuration "regular-expression";
```

You can include one **deny-configuration** and one **allow-configuration** statement in each login class.

If you allow and deny the same set of configuration hierarchy levels, regular expressions, or commands, the **allow-configuration** statement permissions take precedence over the permissions specified by the **deny-configuration** statement. For example, if you include **allow-configuration "system services"** and **deny-configuration "system services"**, the login class user can continue to edit the configuration or issue commands at the **edit system services** hierarchy level.

#### Related Documentation

- [Defining Access Privileges Using allow/deny-configuration Statements on page 1262](#)
- [Configuring Access Privilege Levels on page 1212](#)

## Specifying Access Privileges for Junos OS Operational Mode Commands

You can specify extended regular expressions by using the **allow-commands** and **deny-commands** statements to define a user's access privileges to individual operational mode commands. Doing so takes precedence over a login class permissions bit set for a user. You can include one **deny-commands** and one **allow-commands** statement in each login class.

To explicitly provide use of an individual operational mode command that would otherwise be denied, include the **allow-commands** statement at the **[edit system login class *class-name*]** hierarchy level:

```
[edit system login class class-name]
  allow-commands "regular-expression";
```

To explicitly deny access to an individual operational mode command that would otherwise be supported, include the **deny-commands** statement at the **[edit system login class *class-name*]** hierarchy level:



```
[edit system login class class-name]  
deny-commands "regular-expression";
```

If the regular expression contains any spaces, operators, or wildcard characters, enclose the expression in quotation marks. Regular expressions are not case-sensitive.

```
allow-commands "show interfaces";
```



**NOTE:** Modifiers are not supported within the regular expression string to be matched. If a modifier is used, then nothing is matched.

For example, the deny command **set protocols** does not match anything, whereas **protocols** matches *protocols*.

Explicitly providing access to operational mode commands using the **allow-commands** statement adds to the regular permissions set using the **permissions** statement. Likewise, explicitly denying access to operational mode commands using the **deny-commands** statement removes permissions for the specified commands from the default permissions provided by the **permissions** statement.

For example, if a login class has the permission **view** and the **allow-commands** statement includes the **request system software add** command, the specified login class user can install software, in addition to the permissions specified by the **view** permissions flag. Likewise, if a login class has the permission **all** and the **deny-commands** statement includes the **request system software add** command, the specified login class user can perform all operations allowed by the **all** permissions flag, except installing software using the **request system software add** command.

If you allow and deny the same commands, the **allow-commands** permissions take precedence over the permissions specified by **deny-commands**. For example, if you include **allow-commands "request system software add"** and **deny-commands "request system software add"**, the login class user is allowed to install software using the **request system software add** command.

If you specify a regular expression for **allow-commands** and **deny-commands** with two different variants of a command, the longest match is always executed.

For example, if you specify a regular expression for **allow-commands** with the **commit-synchronize** command and a regular expression for **deny-commands** with the **commit** command, users assigned to such a login class would be able to issue the **commit synchronize** command, but not the **commit** command. This is because **commit-synchronize** is the longest match between **commit** and **commit-synchronize**, and it is specified for **allow-commands**.

Likewise, if you specify a regular expression for **allow-commands** with the **commit** command and a regular expression for **deny-commands** with the **commit-synchronize** command, users assigned to such a login class would be able to issue the **commit** command, but not the **commit-synchronize** command. This is because **commit-synchronize** is the longest match between **commit** and **commit-synchronize**, and it is specified for **deny-commands**.



Anchors are required when specifying complex regular expressions with **allow-commands** or **deny-commands** statements. For example, when specifying multiple commands using the pipe (|) symbol for **allow-commands**, the following syntax is incorrect:

**allow-commands = "(monitor.\*)"|(ping.\*)"|(show.\*)"|(exit)"** . Instead, you must specify the expression using the following syntax: **allow-commands = "(^monitor) | (^ping) | (^show) | (^exit)"** OR **allow-commands = "^ (monitor | ping | show | exit)"**

#### Related Documentation

- [Example: Configuring Access Privileges for Operational Mode Commands on page 1246](#)
- [Regular Expressions for Allowing and Denying Junos OS Operational Mode Commands on page 1206](#)
- [allow-commands](#)
- [deny-commands](#)

## Using Junos OS to Configure Logical System Administrators

Using Junos OS, you can partition a single router or switch into multiple logical devices that perform independent routing or switching tasks. When creating logical systems, you must configure logical system administrators and interfaces, assign logical interfaces to logical systems, and configure various other logical system statements.

The master administrator can assign one or more logical system administrators to each logical system. Once assigned to a logical system, administrators are restricted to viewing only configurations of the logical system to which they are assigned and accessing only the operational commands that apply to that particular logical system. This restriction means that these administrators cannot access global configuration statements, and all command output is restricted to the logical system to which the administrators are assigned.

To configure logical system administrators, include the **logical-system *logical-system-name*** statement at the **[edit system login class *class-name*]** hierarchy level and apply the class to the user. For example:

```
[edit]
system {
  login {
    class admin1 {
      permissions all;
      logical-system logical-system-LS1;
    }
    class admin2 {
      permissions view; # Gives users assigned to class admin2 the ability to view
                        # but not to change the configuration.
      logical-system logical-system-LS2;
    }
    user user1 {
      class admin1;
    }
    user user2 {
      class admin2;
    }
  }
}
```



```
}  
}
```

Fully implementing logical systems requires that you also configure any protocols, routing statements, switching statements, and policy statements for the logical system.

**Related  
Documentation**

- Defining Junos OS Login Classes
- [Defining Junos OS Login Classes on page 1235](#)

## Using Regular Expressions on a RADIUS or TACACS+ Server to Allow or Deny Access to Commands

Use regular expressions to specify which operational or configuration mode commands are allowed or denied when you use a RADIUS or TACACS+ server for user authentication. You can specify the regular expressions using the appropriate Juniper Networks vendor-specific RADIUS or TACACS+ attributes in your authentication server configuration.

You can specify **allow-configuration**, **deny-configuration**, **allow-commands**, or **deny-commands** in a single extended regular expression, enclosing multiple commands in parentheses and separating them using the pipe symbol. For example, you can specify multiple **allow-commands** parameters using: **allow-commands= (cmd1 | cmd2 | cmdn)**. You can specify **user-permissions** as a list of comma-separated values, and not as a regular expression.

On a RADIUS or TACACS+ server, you can also use a simplified version for regular expressions where you specify each individual expression on a separate line. The simplified version is valid for **allow-commands**, **deny-commands**, **allow-configuration**, **deny-configuration**, and **permissions** vendor-specific attributes.

For a RADIUS server, specify the individual regular expressions using the following syntax:

```
Juniper-Allow-Commands+= "cmd1"  
Juniper-Allow-Commands+= "cmd2"  
Juniper-Allow-Commands+= "cmdn"  
Juniper-Deny-Commands+= "cmd1"  
Juniper-Deny-Commands+= "cmd2"  
Juniper-Deny-Commands+= "cmdn"  
Juniper-Allow-Configuration+= "regex1"  
Juniper-Allow-Configuration+= "regex2"  
Juniper-Allow-Configuration+= "regexn"  
Juniper-Deny-Configuration+= "regex1"  
Juniper-Deny-Configuration+= "regex2"  
Juniper-Deny-Configuration+= "regexn"  
Juniper-User-Permissions+= "permission-flag1"  
Juniper-User-Permissions+= "permission-flag2"  
Juniper-User-Permissions+= "permission-flagn"
```

For a TACACS+ server, specify the individual regular expressions using the following syntax:

```
allow-commands1= "cmd1"  
allow-commands2= "cmd2"  
allow-commandsn= "cmdn"
```



```
deny-commands1="cmd1"
deny-commands2="cmd2"
deny-commandsn="cmdn"
allow-configuration1="regex1"
allow-configuration2="regex2"
allow-configurationn="regexn"
deny-configuration1="regex1"
deny-configuration2="regex2"
deny-configurationn="regexn"
user-permissions1="permission-flag1"
user-permissions2="permission-flag2"
user-permissionsn="permission-flagn "
```

**NOTE:**

- Numeric values 1 to *n* in the syntax (for a TACACS+ server) must be unique but need not be sequential. For example, the following syntax is valid:

```
allow-commands1="cmd1"
allow-commands3="cmd3"
allow-commands2="cmd2"
deny-commands3="cmd3"
deny-commands2="cmd2"
deny-commands1="cmd1"
```

- The limit on the number of lines of individual regular expressions is imposed by the TACACS+ or RADIUS server.
- When you issue the `show cli authorization` command, the command output displays the regular expression in a single line, even if you specify each individual expression on a separate line.

For more information about Juniper Networks vendor-specific RADIUS and TACACS+ attributes, see [“Juniper Networks Vendor-Specific RADIUS Attributes” on page 1188](#) and [“Juniper Networks Vendor-Specific TACACS+ Attributes” on page 1190](#).



**NOTE:** When RADIUS or TACACS+ authentication is configured for a router, regular expressions configured on the RADIUS or TACACS+ server merge with any regular expressions configured on the local router at the [edit system login class] hierarchy level using the `allow-commands`, `deny-commands`, `allow-configuration`, `deny-configuration`, or `permissions` statements. If the final expression has a syntax error, the overall result is an invalid regular expression.

**Related Documentation**

- [Junos OS Authentication Order for RADIUS, TACACS+, and Password Authentication on page 1196](#)

## VSA Match Conditions and Actions

EX Series switches and the QFX Series support the configuration of RADIUS server attributes specific to Juniper Networks. These attributes are known as vendor-specific



attributes (VSAs). They are configured on RADIUS servers and work in combination with 802.1X authentication. Using VSAs, you can apply port firewall filter attributes as a subset of match conditions and actions sent from the RADIUS server to the switch as a result of successful 802.1X authentication.

Each term in a VSA configured through the RADIUS server consists of *match conditions* and an *action*. Match conditions are the values or fields that the packet must contain. You can define single, multiple, or no match conditions. If no match conditions are specified for the term, the packet is accepted by default. The action is the action that the switch takes if a packet matches the match conditions for the specific term. Allowed actions are to accept a packet or to discard a packet.

The following guidelines apply when you specify match conditions and actions for VSAs:

- Both **match** and **action** statements are mandatory.
- Any or all options (separated by commas) may be included in each **match** and **action** statement.
- Fields separated by commas will be ANDed if they are of a different type. The same types cannot be repeated.
- For OR cases (for example, match 10.1.1.0/24 OR 11.1.1.0/24), apply multiple VSAs to the 802.1X supplicant.
- In order for the **forwarding-class** option to be applied, the forwarding class must be configured on the switch. If it is not configured on the switch, this option is ignored.

Table 94 on page 1244 describes the match conditions you can specify when configuring a VSA using the **match** command on the RADIUS server. The string that defines a match condition is called a *match statement*.

Table 94: Match Conditions

| Option                                    | Description                                                                                                                                                                                                                                                                                                                                |
|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>destination-mac</b> <i>mac-address</i> | Destination media access control (MAC) address of the packet.                                                                                                                                                                                                                                                                              |
| <b>source-vlan</b> <i>source-vlan</i>     | Name of the source VLAN.                                                                                                                                                                                                                                                                                                                   |
| <b>source-dot1q-tag</b> <i>tag</i>        | Tag value in the 802.1Q header, in the range 0 through 4095.                                                                                                                                                                                                                                                                               |
| <b>destination-ip</b> <i>ip-address</i>   | Address of the final destination node.                                                                                                                                                                                                                                                                                                     |
| <b>ip-protocol</b> <i>protocol-id</i>     | IPv4 protocol value. In place of the numeric value, you can specify one of the following text synonyms:<br><br><b>ah</b> , <b>egp</b> (8), <b>esp</b> (50), <b>gre</b> (47), <b>icmp</b> (1), <b>igmp</b> (2), <b>ipip</b> (4), <b>ipv6</b> (41), <b>ospf</b> (89), <b>pim</b> (103), <b>rsvp</b> (46), <b>tcp</b> (6), or <b>udp</b> (17) |
| <b>source-port</b> <i>port</i>            | TCP or User Datagram Protocol (UDP) source port field. Normally, you specify this match statement in conjunction with the <b>ip-protocol</b> match statement to determine which protocol is being used on the port. In place of the numeric field, you can specify one of the text options listed under <b>destination-port</b> .          |



Table 94: Match Conditions (*continued*)

| Option                              | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>destination-port</b> <i>port</i> | <p>TCP or UDP destination port field. Normally, you specify this match in conjunction with the <b>ip-protocol</b> match statement to determine which protocol is being used on the port. In place of the numeric value, you can specify one of the following text synonyms (the port numbers are also listed):</p> <p>afs (1483), bgp (179), biff (512), bootpc (68), bootps (67), cvspserver (2401), cmd (514), dhcp (67), domain (53), eklogin (2105), ekshell (2106), exec (512), finger (79), ftp (21), ftp-data (20), http (80), https (443), ident (113), imap (143), kerberos-sec (88), klogin (543), kpasswd (761), krb-prop (754), krbupdate (760), kshell (544), ldap (389), login (513), mobileip-agent (434), mobilip-mn (435), msdp (639), netbios-dgm (138), netbios-ns (137), netbios-ssn (139), nfsd (2049), nntp (119), ntalk (518), ntp (123), pop3 (110), pptp (1723), printer (515), radacct (1813), radius (1812), rip (520), rkinit (2108), smtp (25), snmp (161), snmptrap (162), snpp (444), socks (1080), ssh (22), sunrpc (111), syslog (514), telnet (23), tacacs-ds (65), talk (517), tftp (69), timed (525), who (513), xdmcp (177), zephyr-clt (2103), zephyr-hm (2104)</p> |

When you define one or more terms that specify the filtering criteria, you also define the action to take if the packet matches all criteria. [Table 95 on page 1245](#) shows the actions that you can specify in a term.

Table 95: Actions for VSAs

| Option                                          | Description                                                                                                                                                                                                                        |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (allow   deny)                                  | Accept a packet or discard a packet silently without sending an Internet Control Message Protocol (ICMP) message.                                                                                                                  |
| <b>forwarding-class</b> <i>class-of-service</i> | <p>(Optional) Classify the packet in one of the following forwarding classes:</p> <ul style="list-style-type: none"> <li>assured-forwarding</li> <li>best-effort</li> <li>expedited-forwarding</li> <li>network-control</li> </ul> |
| <b>loss-priority</b> (low   medium   high)      | (Optional) Set the packet loss priority (PLP) to <b>low</b> , <b>medium</b> , or <b>high</b> . Specify both the forwarding class and loss priority.                                                                                |

#### Related Documentation

- Filtering 802.1X Supplicants Using RADIUS Server Attributes
- Understanding 802.1X and VSAs on EX Series Switches
- [Understanding VSAs on the QFX Series on page 1188](#)

## Configuration Examples

- [Example: Configuring Access Privilege Levels on page 1246](#)
- [Example: Configuring Access Privileges for Operational Mode Commands on page 1246](#)
- [Example: Configuring a Plain-Text Password for Root Logins on page 1247](#)



- [Example: Configuring RADIUS Authentication on page 1247](#)
- [Example: Configuring RADIUS System Accounting on page 1248](#)
- [Example: Configuring the Root Password on page 1249](#)
- [Example: Configuring SSH Authentication for Root Logins on page 1249](#)
- [Example: Configuring User Accounts on page 1250](#)
- [Example: Configuring System Authentication for RADIUS, TACACS+, and Password Authentication on page 1251](#)
- [Example: Creating Login Classes with Specific Privileges on page 1252](#)
- [Example: Configuring QFabric System Login Classes on page 1253](#)
- [Example: Configuring User Login Accounts on page 1261](#)
- [Example: Configuring RADIUS Template Accounts on page 1261](#)
- [Defining Access Privileges Using allow/deny-configuration Statements on page 1262](#)
- [Example: Limiting the Number of Login Attempts for SSH and Telnet Sessions on page 1263](#)

### Example: Configuring Access Privilege Levels

Create two access privilege classes on the router or switch, one for configuring and viewing user accounts only and the second for configuring and viewing SNMP parameters only:

```
[edit]
system {
  login {
    class user-accounts {
      permissions [ configure admin admin-control ];
    }
    class network-mgmt {
      permissions [ configure snmp snmp-control ];
    }
  }
}
```

#### Related Documentation

- [Configuring Access Privilege Levels on page 1212](#)

### Example: Configuring Access Privileges for Operational Mode Commands

The following example shows how to configure access privileges for different login classes for individual operational mode commands:

```
[edit]
system {
  # This login class has operator privileges and the additional ability
  # to reboot the router.
  login {
    # This login class has operator privileges and the additional ability to reboot the
    # router or switch.
    class operator-and-boot {
      permissions [ clear network reset trace view ];
      allow-commands "request system reboot";
    }
  }
}
```



```

}
# This login class has operator privileges but can't use any commands beginning
# with "set" .
# This login class has operator privileges
# but cannot use any commands beginning with "set"
class operator-no-set {
permissions [ clear network reset trace view ];
deny-commands "^set";
}
# This login class has operator privileges and can install software but not view
# BGP information, and can issue the show route command, without specifying
# commands or arguments under it.
class operator-and-install-but-no-bgp {
permissions [ clear network reset trace view ];
allow-commands "(request system software add)|(show route$)";
deny-commands "show bgp";
}
}
}

```

**Related Documentation** • [Specifying Access Privileges for Junos OS Operational Mode Commands on page 153](#)

### Example: Configuring a Plain-Text Password for Root Logins

The following example shows how to set a plain-text password for root logins:

```

[edit]
user@switch# set system root-authentication plain-text-password
New password: type root password
Retype new password: retry root password
[edit]
user@switch# show
system {
  root-authentication {
    encrypted-password "$1$14c5.$sBopasddsdfs0";
  }
}

```

**Related Documentation** • [Configuring the Root Password](#)

### Example: Configuring RADIUS Authentication

The Junos OS supports two protocols for central authentication of users on multiple routers: RADIUS and TACACS+. We recommend RADIUS because it is a multivendor IETF standard, and its features are more widely accepted than those of TACACS+ or other proprietary systems. In addition, we recommend using a one-time-password system for increased security, and all vendors of these systems support RADIUS.

The Junos OS uses one or more template accounts to perform user authentication. You create the template account or accounts, and then configure the user access to use that account. If the RADIUS server is unavailable, the fallback is for the login process to use the local account that set up on the router or switch.



The following example shows how to configure RADIUS authentication:

```
[edit]
system {
  authentication-order [ radius password ];
  root-authentication {
    encrypted-password "$9$aHlj8gqQ1gjjgjhggjiiiii"; # SECRET-DATA
  }
  name-server {
    10.1.1.1;
    10.1.1.2;
  }
}
```

The following example shows how to enable RADIUS authentication and define the shared secret between the client and the server. The secret enables the client and server to determine that they are talking to the trusted peer.

Define a timeout value for each server, so that if there is no response within the specified number of seconds, the router can try either the next server or the next authentication mechanism.

```
[edit]
system {
  radius-server {
    10.1.2.1 {
      secret "$9$aHlj8gqQ1sdjerrrhser"; # SECRET-DATA
      timeout 5;
    }
    10.1.2.2 {
      secret "$9$aHlj8gqQ1csdoiuardwefoiud"; # SECRET-DATA
      timeout 5;
    }
  }
}
```

**Related Documentation**

- [Configuring RADIUS Authentication](#)

## Example: Configuring RADIUS System Accounting

The following example shows three servers (10.5.5.5, 10.6.6.6, and 10.7.7.7) configured for RADIUS accounting.

```
system {
  accounting {
    events [ login change-log interactive-commands ];
    destination {
      radius {
        server {
          10.5.5.5 {
            accounting-port 3333;
            secret $9$dkafeqwrew;
            source-address 10.1.1.1;
            retry 3;
            timeout 3;
          }
        }
      }
    }
  }
}
```



```

    }
    10.6.6.6 secret $9$fe3erqwrez;
    10.7.7.7 secret $9$f34929ftby;
  }
}
}
}
}

```

**Related Documentation**

- [Configuring RADIUS System Accounting](#)

### Example: Configuring the Root Password

The following example shows how to configure the root password:

```

[edit]
user@switch# set system root-authentication encrypted-password
"$1$14c5.$sBopasddsdfs0"
[edit]
user@switch# show
system {
  root-authentication {
    encrypted-password "$1$14c5.$sBopasddsdfs0";
  }
}

```

**Related Documentation**

- [Configuring the Root Password](#)
- [Example: Configuring a Plain-Text Password for Root Logins on page 1247](#)
- [Configuring the Root Password on page 1222](#)

### Example: Configuring SSH Authentication for Root Logins

The following example shows how to configure two public DSA keys for SSH authentication of root logins:

```

[edit system]
root-authentication {
  encrypted-password "$1$1wp5tqMX$uy/u5H7OdXTwfWTmeJWXe/";
  ## SECRET-DATA;
  ssh-dsa "2354 95 9304@boojum.per";
  ssh-dsa "0483 02 8362@ecbatana.per";
}

```

**Related Documentation**

- [Configuring the Root Password](#)
- [Special Requirements for Junos OS Plain-Text Passwords on page 1207](#)



## Example: Configuring User Accounts

The following example shows how to create accounts for four router or switch users, and create an account for the template user **remote**. All users use one of the default system login classes. User **alexander** also has two digital signal algorithm (DSA) public keys configured for SSH authentication.

```
[edit]
system {
  login {
    user philip {
      full-name "Philip of Macedonia";
      uid 1001;
      class super-user;
      authentication {
        encrypted-password "$1$poPPeY";
      }
    }
    user alexander {
      full-name "Alexander the Great";
      uid 1002;
      class view;
      authentication {
        encrypted-password "$1$14c5.$sBopasdFFdssdfFFdsdfs0";
        ssh-dsa "8924 37 5678 5678@gaugamela.per";
        ssh-dsa "6273 94 9283@boojum.per";
      }
    }
    user darius {
      full-name "Darius King of Persia";
      uid 1003;
      class operator;
      authentication {
        ssh-rsa "1024 37 12341234@ecbatana.per";
      }
    }
    user anonymous {
      class unauthorized;
    }
    user remote {
      full-name "All remote users";
      uid 9999;
      class read-only;
    }
  }
}
```

### Related Documentation

- Junos OS User Accounts Overview
- Limiting the Number of User Login Attempts for SSH and Telnet Sessions



## Example: Configuring System Authentication for RADIUS, TACACS+, and Password Authentication

The following example shows how to configure system authentication for RADIUS, TACACS+, and password authentication.

In this example, only the user Philip and users authenticated by a remote RADIUS server can log in. If a user logs in and is not authenticated by the RADIUS server, the user is denied access to the router or switch. If the RADIUS server is not available, the user is authenticated using the **password** authentication method and allowed access to the router or switch. For more information about the password authentication method, see [“Using Local Password Authentication” on page 1197](#).

When Philip tries to log in to the system, if the RADIUS server authenticates him, he is given access and privileges for the **super-user** class. Local accounts are not configured for other users. When they log in to the system and the RADIUS server authenticates them, they are given access using the same user ID (UID) 9999 and the privileges associated with the **operator** class.

```
[edit]
system {
  authentication-order radius;
  login {
    user philip {
      full-name "Philip";
      uid 1001;
      class super-user;
    }
    user remote {
      full-name "All remote users";
      uid 9999;
      class operator;
    }
  }
}
```



**NOTE:** For authorization purposes, you can use a template account to create a single account that can be shared by a set of users at the same time. For example, when you create a remote template account, a set of remote users can concurrently share a single UID. For more information about template accounts, see [“Overview of Template Accounts for RADIUS and TACACS+ Authentication” on page 1185](#).

When a user logs in to a device, the user's login name is used by the RADIUS or TACACS+ server for authentication. If the user is authenticated successfully by the authentication server and the user is not configured at the **[edit system login user]** hierarchy level, the device uses the default remote template user account for the user, provided a remote template account is configured at the **edit system login user remote** hierarchy level. The remote template account serves as a default template user account for all users that



are authenticated by the authentication server but not having a locally configured user account on the device. Such users share the same login class and UID.

To configure an alternate template user, specify the **user-name** parameter returned in the RADIUS authentication response packet. Not all RADIUS servers allow you to change this parameter. The following shows a sample Junos OS configuration:

```
[edit]
system {
  authentication-order radius;
  login {
    user philip {
      full-name "Philip";
      uid 1001;
      class super-user;
    }
    user operator {
      full-name "All operators";
      uid 9990;
      class operator;
    }
    user remote {
      full-name "All remote users";
      uid 9999;
      class read-only;
    }
  }
}
```

Assume your RADIUS server is configured with the following information:

- User Philip with password “olympia”
- User Alexander with password “bucephalus” and username “operator”
- User Darius with password “redhead” and username “operator”
- User Roxane with password “athena”

Philip would be given access as a superuser (**super-user**) because he has his own local user account. Alexander and Darius share UID 9990 and have access as operators. Roxane has no template-user override, so she shares access with all the other remote users, getting read-only access.

**Related  
Documentation**

- [Configuring the Junos OS Authentication Order for RADIUS, TACACS+, and Local Password Authentication on page 1214](#)

## Example: Creating Login Classes with Specific Privileges

The following example shows how to create several user classes, each with specific privileges. In this example, you configure timeouts to disconnect the class members after a period of inactivity. Users' privilege levels, and therefore the classes of which they are members, should be dependent on their responsibilities within the organization, and the permissions shown here are only examples.



The first class of users (called “observation”) can only view statistics and configuration. They are not allowed to modify any configuration. The second class of users (called “operation”) can view and modify the configuration. The third class of users (called “engineering”) has unlimited access and control.

```
[edit]
system {
  login {
    class observation {
      idle-timeout 5;
      permissions [ view ];
    }
    class operation {
      idle-timeout 5;
      permissions [ admin clear configure interface interface-control network
reset routing routing-control snmp snmp-control trace-control
firewall-control rollback ];
    }
    class engineering {
      idle-timeout 5;
      permissions all;
    }
  }
}
```

**Related Documentation**

- [Defining Junos OS Login Classes](#)

## Example: Configuring QFabric System Login Classes

This example shows you how to assign the correct login class to users so they can access components within a QFabric system.

- [Requirements on page 1253](#)
- [Overview on page 1254](#)
- [Configuration on page 1255](#)
- [Verification on page 1257](#)

### Requirements

This example uses the following hardware and software components:

- One QFX3000-G QFabric system containing:
  - Two QFX3100 Director devices
  - Two QFX3008-I Interconnect devices
  - Eight QFX3500 Node devices
  - Junos OS Release 12.2 for these QFX Series components
- Eight EX4200 switches, used to make two redundant Virtual Chassis with four members apiece



- Junos OS Release 12.1R1.9 for the EX Series switches used in the Virtual Chassis

Before you begin:

- Perform the initial setup of the QFabric system on the Director group, which includes the creation of a username and password for the QFabric system components. See [Performing the QFabric System Initial Setup on a QFX3100 Director Group](#).

## Overview

---

The QFabric system offers three special preset login classes that provide different levels of access to individual components within a QFabric system (such as Node devices and Interconnect devices). The *qfabric-admin* class provides the ability to log in to individual QFabric system components and manage them. The *qfabric-operator* class enables the user to log in to individual components and view component-level operations and configurations. The *qfabric-user* class prevents access to individual QFabric system components.

You include these classes in your configuration at the **[edit system login user *username* authentication remote-debug-permission]** hierarchy level. The key task is to decide which class you should apply to users based on their need to access QFabric system components.



**NOTE:** To set QFabric system login classes for a root user, include the **remote-debug-permission** statement at the **[edit system root-authentication]** hierarchy level and specify the *qfabric-admin* class.

If you assign the *qfabric-admin* or the *qfabric-operator* class to a user, the QFabric system maps the user to a list of authorized users who are permitted to access components. To facilitate ease of use, the QFabric system uses the component password you specified during the initial setup of the Director group. When users assigned the *qfabric-admin* or the *qfabric-operator* class log in to a component by issuing the **request component login** operational mode command, the QFabric system verifies the class and sends the username and password to the component. The component accepts these credentials and permits access.



**NOTE:**

- The three QFabric system login classes give access to the components only. To provide access to the QFabric system as a whole through the default partition command-line interface (CLI), you must configure the usual Junos OS login classes or permissions (such as the *super-user* class). For more information about login classes, see [“Junos OS Login Classes Overview” on page 1203](#).
- If you have completed the QFabric system initial setup and the system is operational, you can change the component password by issuing the **device-authentication** statement at the **[edit system]** hierarchy level in the QFabric default partition CLI.



### Topology

This example defines three users: Adam, Oscar, and Ulf. Adam needs to manage QFabric system components, Oscar needs read-only access, and Ulf should not have access to the components. As a result, assign the qfabric-admin class to Adam, the qfabric-operator class to Oscar, and the qfabric-user class to Ulf. However, all three users should have all permissions to access the QFabric system CLI.

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set system login class all-qfabric permissions all
set system login user Adam class all-qfabric
set system login user Adam authentication encrypted-password
"$1$aoYSFkvE$G/dYqsTV5iSvVW2sND69U."
set system login user Adam authentication remote-debug-permission qfabric-admin
set system login user Oscar class all-qfabric
set system login user Oscar authentication encrypted-password
"$1$3e.3wJQ8$31SrZV0.efdRbk.ZJncKm0"
set system login user Oscar authentication remote-debug-permission qfabric-operator
set system login user Ulf class all-qfabric
set system login user Ulf authentication encrypted-password
"$1$qt9Ncm0o$okNYSN8O4fVITE/SHBdYj0"
set system login user Ulf authentication remote-debug-permission qfabric-user
```

#### Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To provide the same access to the QFabric system CLI for all users, but different QFabric system component-level access to different users:

1. Define and provide all-qfabric access and passwords to all three users. This administrator-defined class provides full permissions, enabling the users to log in to the QFabric system default partition and use the CLI. Alternatively, you can assign the super-user class to these users to accomplish the same goal.

```
[edit]
user@qfabric# set system login class all-qfabric permissions all
user@qfabric# set system login user Adam class all-qfabric
user@qfabric# set system login user Adam authentication encrypted-password
"$1$aoYSFkvE$G/dYqsTV5iSvVW2sND69U."
user@qfabric# set system login user Oscar class all-qfabric
user@qfabric# set system login user Oscar authentication encrypted-password
"$1$3e.3wJQ8$31SrZV0.efdRbk.ZJncKm0"
user@qfabric# set system login user Ulf class all-qfabric
user@qfabric# set system login user Ulf authentication encrypted-password
"$1$qt9Ncm0o$okNYSN8O4fVITE/SHBdYj0"
```



2. Provide qfabric-admin component access to Adam so he can manage QFabric system components.

```
[edit]
user@qfabric# set system login user Adam authentication remote-debug-permission
qfabric-admin
```

3. Provide qfabric-operator component access to Oscar so he can view the CLI at the QFabric system components.

```
[edit]
user@qfabric# set system login user Oscar authentication remote-debug-permission
qfabric-operator
```

4. Assign qfabric-user component restrictions to Ulf to prevent him from accessing the QFabric system components.

```
[edit]
user@qfabric# set system login user Ulf authentication remote-debug-permission
qfabric-user
```

**Results** From configuration mode, confirm your configuration by entering the **show** command. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

For brevity, this **show** command output includes only the configuration that is relevant to this example.

```
[edit]
system {
  login {
    class all-qfabric {
      permissions all;
    }
    user Adam {
      class all-qfabric;
      authentication {
        encrypted-password "$1$aoYSFkVE$G/dYqsTV5iSvVW2sND69U."; ##
        SECRET-DATA
        remote-debug-permission qfabric-admin;
      }
    }
    user Oscar {
      class all-qfabric;
      authentication {
        encrypted-password "$1$3e.3wJQ8$31SrZVO.efdBk.ZJncKm0"; ## SECRET-DATA
        remote-debug-permission qfabric-operator;
      }
    }
    user Ulf {
      class all-qfabric;
      authentication {
        encrypted-password "$1$qt9Ncm0o$okNYSN8O4fvITE/SHBdYj0"; ##
        SECRET-DATA
        remote-debug-permission qfabric-user;
      }
    }
  }
}
```



```

    }
  }
}

```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the QFabric system and component-level access configuration is working properly for all three users. Adam, Oscar, and Ulf should have equivalent, full-permission access to the QFabric system CLI. Adam should have management-level access to components. Oscar should have read-only access to components. Ulf should have no component-level access.

- [Verifying qfabric-admin Access on page 1257](#)
- [Verifying qfabric-operator Access on page 1259](#)
- [Verifying qfabric-user Access on page 1260](#)

#### *Verifying qfabric-admin Access*

**Purpose** Verify that Adam can access the QFabric system CLI at the default partition and manage QFabric system components.

**Action** From a management station on your network, issue the **ssh user@qfabric** command and enter the password to open an SSH session for Adam to the QFabric system. Issue the **?** command to view the CLI operational mode commands that Adam has permission to use on the QFabric system default partition.

```

> ssh Adam@qfabric.network.net
Warning: Permanently added 'qfabric.network.net' (RSA) to the list of known hosts.
Adam@qfabric.network.net's password:
Last login: Sun Nov 20 14:12:29 2011 from 192.168.28.19
Juniper QFabric Director 11.3.5510 2011-10-21 16:31:44 UTC

```

```

RUNNING ON DIRECTOR DEVICE : dg0
Adam@qfabric>

```

```

Adam@qfabric> ?

```

Possible completions:

|           |                                                        |
|-----------|--------------------------------------------------------|
| clear     | Clear information in the system                        |
| configure | Manipulate software configuration information          |
| file      | Perform file operations                                |
| help      | Provide help information                               |
| load      | Load information from file                             |
| op        | Invoke an operation script                             |
| ping      | Ping remote target                                     |
| quit      | Exit the management session                            |
| request   | Make system-level requests                             |
| restart   | Restart software process                               |
| save      | Save information to file                               |
| set       | Set CLI properties, date/time, craft interface message |
| show      | Show system information                                |
| telnet    | Telnet to another host                                 |



|            |                              |
|------------|------------------------------|
| test       | Perform diagnostic debugging |
| traceroute | Trace route to remote host   |

Issue the **request component login ?** command to view the components that Adam can access. Next, issue the **request component login *component-name*** command to log in to a Node device without being prompted for a username or password.

```
Adam@qfabric> request component login ?
Possible completions:
<[Enter]>          Execute this command
<node-name>       Inventory name for the remote node
BBAK0372          Node device
BBAK0394          Node device
DRE-0             Diagnostic routing engine
EE3093            Node device
FC-0              Fabric control
FC-1              Fabric control
FM-0              Fabric manager
NW-NG-0           Node group
WS001/RE0         Interconnect device control board
WS001/RE1         Interconnect device control board
|                 Pipe through a command
```

```
Adam@qfabric> request component login EE3093
Warning: Permanently added 'qfnode-ee3093,169.254.128.14' (RSA) to the list of
known hosts.
--- JUNOS 11.3I built 2011-11-04 12:46:16 UTC
{master}
```

Finally, issue the **?** command to view the CLI operational mode commands that Adam has the permission to use on the Node device. Notice that the CLI prompt now indicates Adam's component access level (**qfabric-admin**) as the username and the Node device identifier (**EE3093**) as the host.

```
qfabric-admin@EE3093> ?
Possible completions:
clear              Clear information in the system
file               Perform file operations
help               Provide help information
load               Load information from file
monitor            Show real-time debugging information
mtrace             Trace multicast path from source to receiver
op                 Invoke an operation script
ping               Ping remote target
quit               Exit the management session
request            Make system-level requests
restart            Restart software process
save               Save information to file
set                Set CLI properties, date/time, craft interface message
show               Show system information
ssh                Start secure shell on another host
start              Start shell
telnet             Telnet to another host
test               Perform diagnostic debugging
traceroute         Trace route to remote host
```

**Meaning** The output shows that Adam has received the proper permissions to access the QFabric system CLI and log in to individual components with management-level access.



**Verifying qfabric-operator Access**

**Purpose** Verify that Oscar can access the QFabric system CLI at the default partition and view the CLI on the QFabric system components.

**Action** From a management station on your network, issue the **ssh user@qfabric** command and enter the password to open an SSH session for Oscar to the QFabric system. Issue the **?** command to view the CLI operational mode commands that Oscar has permission to use on the QFabric system default partition. Notice that these permissions are the same as those given to Adam.

```
> ssh Oscar@qfabric.network.net
Warning: Permanently added 'qfabric.network.net' (RSA) to the list of known hosts.
Oscar@qfabric.network.net's password:
Last login: Sun Nov 19 19:21:29 2011 from 192.168.28.14
Juniper QFabric Director 11.3.5510 2011-10-22 18:33:41 UTC
```

```
RUNNING ON DIRECTOR DEVICE : dg1
Oscar@qfabric>
```

```
Oscar@qfabric> ?
```

Possible completions:

|            |                                                        |
|------------|--------------------------------------------------------|
| clear      | Clear information in the system                        |
| configure  | Manipulate software configuration information          |
| file       | Perform file operations                                |
| help       | Provide help information                               |
| load       | Load information from file                             |
| op         | Invoke an operation script                             |
| ping       | Ping remote target                                     |
| quit       | Exit the management session                            |
| request    | Make system-level requests                             |
| restart    | Restart software process                               |
| save       | Save information to file                               |
| set        | Set CLI properties, date/time, craft interface message |
| show       | Show system information                                |
| telnet     | Telnet to another host                                 |
| test       | Perform diagnostic debugging                           |
| traceroute | Trace route to remote host                             |

Issue the **request component login component-name** command to log in to a Node device without being prompted for a username or password.

```
Oscar@qfabric> request component login EE3093
Warning: Permanently added 'qfnode-ee3093,169.254.128.14' (RSA) to the list of
known hosts.
--- JUNOS 11.3I built 2011-11-04 12:46:16 UTC
{master}
```

Finally, issue the **?** command to view the CLI operational mode commands that Oscar has permission to use on the Node device. Notice that the CLI prompt now indicates Oscar's component access level (**qfabric-operator**) as the username and the Node device identifier (**EE3093**) as the host. Additionally, Oscar has fewer CLI commands available than Adam because of Oscar's read-only qfabric-operator login class.

```
qfabric-operator@EE3093> ?
```

Possible completions:

|      |                         |
|------|-------------------------|
| file | Perform file operations |
|------|-------------------------|



|         |                                                        |
|---------|--------------------------------------------------------|
| help    | Provide help information                               |
| load    | Load information from file                             |
| op      | Invoke an operation script                             |
| quit    | Exit the management session                            |
| request | Make system-level requests                             |
| save    | Save information to file                               |
| set     | Set CLI properties, date/time, craft interface message |
| show    | Show system information                                |
| start   | Start shell                                            |
| test    | Perform diagnostic debugging                           |

**Meaning** The output shows that Oscar has full permissions to access the QFabric system CLI, but only read-only access when he logs in to individual components. Oscar's permissions on the QFabric system are the same as Adam's, but Oscar has fewer permissions than Adam on the Node device.

### *Verifying qfabric-user Access*

**Purpose** Verify that Ulf has full access to the QFabric system CLI at the default partition but cannot access the QFabric system components.

**Action** From a management station on your network, issue the **ssh user@qfabric** command and enter the password to open an SSH session for Ulf to the QFabric system. Issue the **?** command to view the CLI operational mode commands that Ulf has permission to use on the QFabric system default partition. Notice that these permissions are the same as those given to Adam and Oscar.

```
> ssh Ulf@qfabric.network.net
Warning: Permanently added 'qfabric.network.net' (RSA) to the list of known hosts.
Ulf@qfabric.network.net's password:
Last login: Sun Nov 17 17:12:24 2011 from 192.168.28.22
Juniper QFabric Director 11.3.5510 2011-10-23 19:23:31 UTC
```

```
RUNNING ON DIRECTOR DEVICE : dg0
Ulf@qfabric>
```

```
Ulf@qfabric> ?
```

Possible completions:

|            |                                                        |
|------------|--------------------------------------------------------|
| clear      | Clear information in the system                        |
| configure  | Manipulate software configuration information          |
| file       | Perform file operations                                |
| help       | Provide help information                               |
| load       | Load information from file                             |
| op         | Invoke an operation script                             |
| ping       | Ping remote target                                     |
| quit       | Exit the management session                            |
| request    | Make system-level requests                             |
| restart    | Restart software process                               |
| save       | Save information to file                               |
| set        | Set CLI properties, date/time, craft interface message |
| show       | Show system information                                |
| telnet     | Telnet to another host                                 |
| test       | Perform diagnostic debugging                           |
| traceroute | Trace route to remote host                             |



When Ulf issues the **request component login *component-name*** command, the Node device denies his access attempt.

```
Ulf@qfabric> request component login EE3093
error: User Ulf does not have sufficient permissions to login to device EE3093
```

**Meaning** The output shows that Ulf has full permissions to access the QFabric system CLI in the same way as Adam and Oscar. However, unlike Adam and Oscar, Ulf cannot access individual components because of the qfabric-user login class assigned to him.

- Related Documentation**
- [Understanding QFabric System Login Classes on page 1204](#)
  - [remote-debug-permission on page 1320](#)
  - [request component login on page 1345](#)
  - Performing the QFabric System Initial Setup on a QFX3100 Director Group
  - [Junos OS Login Classes Overview on page 1203](#)

## Example: Configuring User Login Accounts

The following example shows how to configure the local administrator account (**user admin**). If RADIUS fails or becomes unreachable, the login process reverts to password authentication on the local accounts on the router or switch.

```
[edit]
system {
  login {
    user admin {
      uid 1000;
      class engineering;
      authentication {
        encrypted-password "<PASSWORD>"; # SECRET-DATA
      }
    }
  }
}
```

- Related Documentation**
- [Configuring Junos OS User Accounts](#)

## Example: Configuring RADIUS Template Accounts

The following example shows how to configure RADIUS template accounts for different users or groups of users:

```
[edit]
system {
  login {
    user observation {
      uid 1001;
      class observation;
    }
    user operation {
```



```
        uid 1002;
        class operation;
    }
    user engineering {
        uid 1003;
        class engineering;
    }
}
```

**Related  
Documentation**

- [Overview of Template Accounts for RADIUS and TACACS+ Authentication on page 1185](#)

## Defining Access Privileges Using allow/deny-configuration Statements

The following examples show how to configure access privileges for individual configuration mode hierarchy levels.

If the following statement is included in the configuration and the user's login class permission bit is set to **all**, the user cannot configure telnet parameters:

```
[edit system login class class-name]
user@switch# set deny-configuration "system services telnet"
```

If the following statement is included in the configuration and the user's login class permission bit is set to **all**, the user cannot issue login class commands within any login class whose name begins with "m":

```
[edit system login class class-name]
user@switch# set deny-configuration "system login class m.*"
```

If the following statement is included in the configuration and the user's login class permission bit is set to **all**, the user cannot edit a configuration or issue commands (such as **commit**) at the login class or system services hierarchy levels:

```
[edit system login class class-name]
user@switch# set deny-configuration "(system login class) | (system services)"
```

The following example shows how to configure permissions for individual configuration mode hierarchies:

```
[edit]
system {
  login { # This login class has operator privileges and the additional ability to edit
    # configuration at the system services hierarchy level.
    class only-system-services {
      permissions [ configure ];
      allow-configuration "system services";
    }
    # services commands.
    class all-except-system-services { # This login class has operator privileges but
      # cannot edit any system services configuration.
      permissions [ all ];
      deny-configuration "system services";
    }
  }
}
```



```
}
```

**Related  
Documentation**

- Specifying Access Privileges Using allow/deny-configuration Statements
- [Specifying Access Privileges for Junos OS Configuration Mode Hierarchies on page 1238](#)

### Example: Limiting the Number of Login Attempts for SSH and Telnet Sessions

The following example shows how to limit the user to four attempts when the user enters a password while logging in through SSH or Telnet. Set the **backoff-threshold** to 2, the **back-off-factor** to 5 seconds, and the **minimum-time** to 40 seconds. The user experiences a delay of 5 seconds after the second attempt to enter a correct password fails. After each subsequent failed attempt, the delay increases by 5 seconds. After the fourth and final failed attempt to enter a correct password, the user experiences an additional 10-second delay, and the connection closes after a total of 40 seconds.

The additional variables **maximum-time** and **lockout-period** are not set in this example.

```
[edit]
system {
  login {
    retry-options {
      backoff-threshold 2;
      backoff-factor 5;
      minimum-time 40;
      tries-before-disconnect 4;
    }
    password {
    }
  }
}
```



**NOTE:** This sample only shows the portion off the [edit system login] hierarchy level being modified.

**Related  
Documentation**

- Limiting the Number of User Login Attempts for SSH and Telnet Sessions
- login
- [login on page 232](#)



## Configuration Statements

### access

**Syntax**

```
access {
  address-assignment
  pool pool-name
  address-pool pool-name
  profile profile-name {
    accounting {
      accounting-stop-on-access-deny;
      accounting-stop-on-failure;
      (authentication-order (ldap radius | none);
      order (radius | none);
    }
    radius {
      accounting-server [server-addresses];
      authentication-server [server-addresses];
    }
  }
}
```

**Hierarchy Level** [edit]

**Release Information** Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure authentication, authorization, and accounting (AAA) services.  
  
The statements are explained separately.



**NOTE:** The [edit access] hierarchy is not available on QFabric systems.

**Default** Not enabled

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation**

- Configuring 802.1X RADIUS Accounting (CLI Procedure)



## accounting

|                            |                                                                                                                                                                                                         |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>accounting {   accounting-stop-on-access-deny;   accounting-stop-on-failure;   order (radius   none); }</pre>                                                                                      |
| <b>Hierarchy Level</b>     | [edit access profile <i>profile-name</i> ]                                                                                                                                                              |
| <b>Release Information</b> | Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                               |
| <b>Description</b>         | Configure the authentication order for authentication, authorization, and accounting (AAA) services.                                                                                                    |
| <b>Default</b>             | Not enabled                                                                                                                                                                                             |
| <b>Options</b>             | <p><b>none</b>—Use no authentication for specified subscribers.</p> <p><b>radius</b>—Use RADIUS authentication for specified subscribers.</p> <p>The remaining statements are explained separately.</p> |



**NOTE:** The [edit access] hierarchy is not available on QFabric systems.

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• Example: Connecting a RADIUS Server for 802.1X to an EX Series Switch</li> <li>• Configuring 802.1X RADIUS Accounting (CLI Procedure)</li> <li>• Understanding 802.1X and RADIUS Accounting on EX Series Switches</li> <li>• <a href="#">Configuring RADIUS Accounting on page 1217</a></li> <li>• <a href="#">Understanding RADIUS Accounting on page 1187</a></li> </ul> |



## accounting-options

---

```
Syntax  accounting-options {
        class-usage-profile profile-name {
            destination-classes {
                destination-class-name;
            }
            file filename;
            interval minutes;
            source-classes {
                source-class-name;
            }
        }
        file filename {
            archive-sites {
                site-name;
            }
            files number;
            nonpersistent;
            size bytes;
            start-time time;
            transfer-interval minutes;
        }
        filter-profile profile-name {
            counters {
                counter-name;
            }
            file filename;
            interval minutes;
        }
        interface-profile profile-name {
            fields {
                input-bytes;
                input-errors;
                input-multicast;
                input-packets;
                input-unicast;
                output-bytes;
                output-errors;
                output-multicast;
                output-packets;
                output-unicast;
                rpf-check-bytes;
                rpf-check-packets;
                rpf-check6-bytes;
                rpf-check6-packets;
                unsupported-protocol;
            }
            file filename;
            interval minutes;
        }
        mib-profile profile-name {
            file filename;
            interval minutes;
        }
    }
```



```

object-names {
    mib-object-name;
}
operation (get | get-next | walk);
}
policy-decision-statistics-profile profile-name {
    application-aware-access-list-fields {
        address;
        application;
        application-group;
        input-bytes;
        input-interface;
        input-packets;
        mask;
        output-bytes;
        output-packets;
        subscriber-name;
        timestamp;
        vrf-name;
    }
    file filename;
}
routing-engine-profile profile-name {
    fields {
        field-name;
    }
    file filename;
    interval minutes;
}
}

```

|                                 |                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Hierarchy Level</b>          | [edit]                                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                             |
| <b>Description</b>              | Configure options for accounting statistics collection.                                                       |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration. |



## accounting-server

---

|                            |                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | accounting-server[ <i>server-addresses</i> ];                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>     | [edit access profile <i>profile-name</i> radius]                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b> | Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                          |
| <b>Description</b>         | Configure the Remote Authentication Dial-In User Service (RADIUS) server for authentication. To configure multiple RADIUS servers, include multiple server addresses. The servers are tried in order and in a round-robin fashion until a valid response is received from one of the servers or until all the configured retry limits are reached. |
| <b>Default</b>             | Not enabled                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>             | <i>server-addresses</i> —One or more addresses of RADIUS authentication servers.                                                                                                                                                                                                                                                                   |




NOTE: The [edit access] hierarchy is not available on QFabric systems.

|                                 |                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• show network-access aaa statistics authentication</li><li>• Example: Connecting a RADIUS Server for 802.1X to an EX Series Switch</li><li>• Understanding 802.1X and RADIUS Accounting on EX Series Switches</li><li>• <a href="#">Understanding RADIUS Accounting on page 1187</a></li></ul> |




## accounting-stop-on-access-deny

|                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                       | accounting-stop-on-access-deny;                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>                                                                                                                                                              | [edit access profile <i>profile-name</i> accounting]                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>                                                                                                                                                          | Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                    |
| <b>Description</b>                                                                                                                                                                  | Configure the authentication order for authentication, authorization, and accounting (AAA) services to send an Acct-Stop message if the AAA server denies access to a supplicant.                                                                                                                                            |
| <div>  <p><b>NOTE:</b> The [edit access] hierarchy is not available on QFabric systems.</p> </div> |                                                                                                                                                                                                                                                                                                                              |
| <b>Default</b>                                                                                                                                                                      | Not enabled                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b>                                                                                                                                                     | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                              |
| <b>Related Documentation</b>                                                                                                                                                        | <ul style="list-style-type: none"> <li>• Example: Connecting a RADIUS Server for 802.1X to an EX Series Switch</li> <li>• Configuring 802.1X RADIUS Accounting (CLI Procedure)</li> <li>• show network-access aaa statistics authentication</li> <li>• <a href="#">Configuring RADIUS Accounting on page 1217</a></li> </ul> |



## accounting-stop-on-failure

---

|                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                              | accounting-stop-on-failure;                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>                                                                                                                                                     | [edit access profile <i>profile-name</i> accounting]                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>                                                                                                                                                 | Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                     |
| <b>Description</b>                                                                                                                                                         | Configure authentication order for authentication, authorization, and accounting (AAA) services to send an Acct-Stop message if a supplicant fails AAA authorization, but the RADIUS server grants access. For example, a supplicant might fail AAA authentication because of an internal error such as a timeout.                                                                                            |
| <div> <b>NOTE:</b> The [edit access] hierarchy is not available on QFabric systems.</div> |                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Default</b>                                                                                                                                                             | Not enabled                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b>                                                                                                                                            | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>                                                                                                                                               | <ul style="list-style-type: none"><li>• Example: Connecting a RADIUS Server for 802.1X to an EX Series Switch</li><li>• Configuring 802.1X RADIUS Accounting (CLI Procedure)</li><li>• Understanding 802.1X and RADIUS Accounting on EX Series Switches</li><li>• <a href="#">Configuring RADIUS Accounting on page 1217</a></li><li>• <a href="#">Understanding RADIUS Accounting on page 1187</a></li></ul> |



## advertisement-interval

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>advertisement-interval seconds;</code>                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>     | [edit protocols lldp],<br>[edit routing-instances <i>routing-instance-name</i> protocols lldp]                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b> | Statement introduced in Junos OS Release 9.6 for MX Series and T Series routers.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                             |
| <b>Description</b>         | For MX Series and T Series routers, configure an interval for LLDP advertisement.<br><br>For switches configured for Link Layer Discovery Protocol, configure the frequency at which LLDP advertisements are sent.<br><br>The <b>advertisement-interval</b> value must be greater than or equal to four times the <b>transmit-delay</b> value, or an error will be returned when you attempt to commit the configuration. |



**NOTE:** The default value of **transmit-delay** is 2 seconds. If you configure the **advertisement-interval** as less than 8 seconds and you do not configure a value for **transmit-delay**, the default value of **transmit-delay** is automatically changed to 1 second in order to satisfy the requirement that the **advertisement-interval** value must be greater than or equal to four times the **transmit-delay** value.

|                                 |                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Default</b>                  | Disabled.                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <b>seconds</b> —Interval between LLDP advertisement.<br><b>Default:</b> 30<br><b>Range:</b> 5 through 32768                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring LLDP</li> <li><a href="#">show lldp on page 1351</a></li> <li>Configuring LLDP (CLI Procedure)</li> <li>Understanding 802.1X and LLDP and LLDP-MED on EX Series Switches</li> <li>transmit-delay</li> <li><a href="#">Understanding LLDP on page 1186</a></li> </ul> |





## agent-address

---

|                                 |                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | agent-address outgoing-interface;                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit snmp trap-options]                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Set the agent address of all SNMPv1 traps generated by this router or switch. Currently, the only option is <b>outgoing-interface</b> , which sets the agent address of each SNMPv1 trap to the address of the outgoing interface of that trap.                                                                                        |
| <b>Options</b>                  | <b>outgoing-interface</b> —Value of the agent address of all SNMPv1 traps generated by this router or switch. The <b>outgoing-interface</b> option sets the agent address of each SNMPv1 trap to the address of the outgoing interface of that trap.<br><b>Default:</b> Disabled (the agent address is not specified in SNMPv1 traps). |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring the Agent Address for SNMP Traps</li></ul>                                                                                                                                                                                                                                           |





## archival

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> archival {   configuration {     archive-sites {       file://&lt;path&gt;/&lt;filename&gt;;       ftp://username@host:&lt;port&gt;url-path password password;       http://username@host:&lt;port&gt;url-path password password;       pasvftp://username@host:&lt;port&gt;url-path password password;       scp://username@host:&lt;port&gt;url-path password password;     }     transfer-interval interval;     transfer-on-commit;   } } </pre> |
| <b>Hierarchy Level</b>          | [edit system]                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>                                                                                                                                                                                                                                              |
| <b>Description</b>              | Configure copying of the currently active configuration to an archive site. An archive site can be a file, or an FTP or SCP location.                                                                                                                                                                                                                                                                                                                      |
|                                 | <div>  <p><b>NOTE:</b> The <code>edit system archival</code> hierarchy is not available on QFabric systems.</p> </div>                                                                                                                                                                                                                                                  |
| <b>Options</b>                  | The remaining statements are explained separately.                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                 | <div>  <p><b>NOTE:</b> The <code>[edit system archival]</code> hierarchy is not available on QFabric systems.</p> </div>                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Using Junos OS to Configure a Router or Switch to Transfer Its Configuration to an Archive Site on page 1133</li> </ul>                                                                                                                                                                                                                                                                                             |



## archive-sites (Configuration File)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>archive-sites {     file://&lt;path&gt;/&lt;filename&gt;;     ftp://username@host:&lt;port&gt;url-path password password;     http://username@host:&lt;port&gt;url-path password password;     pasvftp://username@host:&lt;port&gt;url-path password password;     scp://username@host:&lt;port&gt;url-path password password; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>     | [edit system archival configuration]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>         | <p>Specify where to transfer the current configuration files. When specifying a URL in a Junos OS statement using an IPv6 host address, you must enclose the entire URL in quotation marks ( " ") and enclose the IPv6 host address in brackets ( [ ] ). For example,</p> <p><b>"scp://username&lt;:password&gt;@[ipv6-host-address]&lt;:port&gt;/url-path"</b></p> <p>If you specify more than one archive site, the router or switch attempts to transfer the configuration files to the first archive site in the list, moving to the next only if the transfer fails. The format for the destination filename is</p> <p><b>router-name_juniper.conf[.gz]_YYYYMMDD_HHMMSS.</b></p> <div style="margin-top: 20px;">  <p><b>NOTE:</b> The time included in the destination filename is always in Coordinated Universal Time (UTC) regardless of whether the time on the router or switch is configured as UTC or the local time zone. The default time zone on the router or switch is UTC.</p> </div> <div style="margin-top: 20px;">  <p><b>NOTE:</b> The [edit system archival] hierarchy is not available on QFabric systems.</p> </div> |
| <b>Options</b>             | <p>The prefix used in the configuration statement determines the form of transfer:</p> <p><b>file://</b> —transfer on a path to a named file</p> <p><b>ftp://</b> —transfer using active FTP server</p> <p><b>pasvftp://</b> —transfer to a device that only accepts passive FTP services</p> <p><b>scp://</b> —transfer to a known host using background SCP file transfers</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |



|                                 |                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Archive Sites for Transfer of Active Configuration Files on page 1134</a></li> <li>• <a href="#">configuration on page 1138</a></li> <li>• <a href="#">transfer-on-commit on page 1140</a></li> </ul> |

## authentication-order

|                            |                                                                                                                                                             |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | authentication-order [none   password   radius];                                                                                                            |
| <b>Hierarchy Level</b>     | [edit <a href="#">access profile</a> <i>profile-name</i> ]                                                                                                  |
| <b>Release Information</b> | Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                   |
| <b>Description</b>         | Configure the order of authentication, authorization, and accounting (AAA) servers to use while sending authentication messages.                            |
| <b>Default</b>             | Not enabled                                                                                                                                                 |
| <b>Options</b>             | <p><b>none</b>—No authentication for specified subscribers.</p> <p><b>password</b>—Password authentication.</p> <p><b>radius</b>—RADIUS authentication.</p> |



**NOTE:** The [edit access] hierarchy is not available on QFabric systems.

|                                 |                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration. |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------|



## authentication-server


---

|                                 |                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>authentication-server [server-addresses];</code>                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit access profile <i>profile-name</i> radius]                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                             |
| <b>Description</b>              | Configure the RADIUS server for authentication. To configure multiple RADIUS servers, include multiple server addresses. The servers are tried in order and in a round-robin fashion until a valid response is received from one of the servers or until all the configured retry limits are reached. |
| <b>Options</b>                  | <b>server-addresses</b> —Configure one or more RADIUS server addresses.                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Example: Connecting a RADIUS Server for 802.1X to an EX Series Switch</li><li>• show network-access aaa statistics authentication</li></ul>                                                                                                                   |



## authorization

---

|                                 |                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>authorization <i>authorization</i>;</code>                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit snmp community <i>community-name</i> ]                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Set the access authorization for SNMP <b>Get</b> , <b>GetBulk</b> , <b>GetNext</b> , and <b>Set</b> requests.                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <p><b><i>authorization</i></b>—Access authorization level:</p> <ul style="list-style-type: none"> <li>• <b>read-only</b>—Enable <b>Get</b>, <b>GetNext</b>, and <b>GetBulk</b> requests.</li> <li>• <b>read-write</b>—Enable all requests, including <b>Set</b> requests. You must configure a view to enable <b>Set</b> requests.</li> </ul> |
|                                 | <div>  <p><b>NOTE:</b> The <b>read-write</b> option is not supported on the QFX3000 QFabric system.</p> </div>                                                                                                                                               |
|                                 | <b>Default:</b> read-only                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the SNMP Community String on page 5537</a></li> </ul>                                                                                                                                                                                                                        |



## categories

---

|                                 |                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>categories {<br/>    category;<br/>}</pre>                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit snmp trap-group <i>group-name</i> ]                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                      |
| <b>Description</b>              | Define the types of traps that are sent to the targets of the named trap group.                                                                                                        |
| <b>Default</b>                  | If you omit the <b>categories</b> statement, all trap types are included in trap notifications.                                                                                        |
| <b>Options</b>                  | <b>category</b> —Name of a trap type: <b>authentication</b> , <b>chassis</b> , <b>configuration</b> , <b>link</b> , <b>remote-operations</b> , <b>rmon-alarm</b> , or <b>startup</b> . |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring SNMP Trap Groups on page 5538</a></li></ul>                                                                            |

## client-list

---

|                                 |                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>client-list <i>client-list-name</i> {<br/>    ip-addresses;<br/>}</pre>                                                                   |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                              |
| <b>Description</b>              | Define a list of SNMP clients.                                                                                                                 |
| <b>Options</b>                  | <b>client-list-name</b> —Name of the client list.<br><br><b>ip-addresses</b> —IP addresses of the SNMP clients to be added to the client list, |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Adding a Group of Clients to an SNMP Community on page 5539</a></li></ul>                  |



## client-list-name

---

|                                 |                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>client-list-name <i>client-list-name</i>;</code>                                                                          |
| <b>Hierarchy Level</b>          | <code>[edit snmp community <i>community-name</i>]</code>                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                               |
| <b>Description</b>              | Add a client list or prefix list to an SNMP community.                                                                          |
| <b>Options</b>                  | <i>client-list-name</i> —Name of the client list or prefix list.                                                                |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Adding a Group of Clients to an SNMP Community on page 5539</a></li> </ul> |

## clients

---

|                                 |                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>clients {     address &lt;restrict&gt;; }</pre>                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | <code>[edit snmp community <i>community-name</i>]</code>                                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                               |
| <b>Description</b>              | Specify the IPv4 or IPv6 addresses of the SNMP client hosts that are authorized to use this community.                                                                                                                                                                                                          |
| <b>Default</b>                  | If you omit the <b>clients</b> statement, all SNMP clients using this community string are authorized to access the switch.                                                                                                                                                                                     |
| <b>Options</b>                  | <p><b>address</b>—Address of an SNMP client that is authorized to access this switch. You must specify an address, not a hostname. To specify more than one client, include multiple <b>address</b> options.</p> <p><b>restrict</b>—(Optional) Do not allow the specified SNMP client to access the switch.</p> |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the SNMP Community String</a></li> </ul>                                                                                                                                                                                                       |




## commit-delay

---

|                                 |                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | commit-delay <i>seconds</i> ;                                                                                                             |
| <b>Hierarchy Level</b>          | [edit snmp nonvolatile]                                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                         |
| <b>Description</b>              | Configure the timer for the SNMP <b>Set</b> reply and start of the commit.                                                                |
| <b>Options</b>                  | <b><i>seconds</i></b> —Delay between an affirmative SNMP <b>Set</b> reply and start of the commit operation.<br><b>Default:</b> 5 seconds |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring the Commit Delay Timer</li></ul>                                                        |



## community (SNMP)

|                                 |                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>community <i>community-name</i> {   authorization <i>authorization</i>;   client-list-name <i>client-list-name</i>;   clients {     address restrict;   }   view <i>view-name</i>; }</pre>                                                                             |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                           |
| <b>Description</b>              | <p>Define an SNMP community. An SNMP community authorizes SNMP clients based on the source IP address of incoming SNMP request packets. A community also defines which MIB objects are available and the operations (read-only or read-write) allowed on those objects.</p> |
|                                 | <div>  <p><b>NOTE:</b> The <b>authorization read-write</b> option is not supported on the QFX3000 QFabric system.</p> </div>                                                               |
|                                 | <p>The SNMP client application specifies an SNMP community name in <b>Get</b>, <b>GetBulk</b>, <b>GetNext</b>, and <b>Set</b> SNMP requests.</p>                                                                                                                            |
| <b>Default</b>                  | If you omit the <b>community</b> statement, all SNMP requests are denied.                                                                                                                                                                                                   |
| <b>Options</b>                  | <p><b><i>community-name</i></b>—Community string. If the name includes spaces, enclose it in quotation marks (" ").</p> <p>The remaining statements are explained separately.</p>                                                                                           |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the SNMP Community String on page 5537</a></li> </ul>                                                                                                                                                      |



## configuration

---

**Syntax**    configuration {  
              transfer-interval *interval*;  
              transfer-on-commit;  
              archive-sites {  
                  file://<path>/<filename>;  
                  ftp://username@host:<port>url-path password password;  
                  http://username@host:<port>url-path password password;  
                  pasvftp://username@host:<port>url-path password password;  
                  scp://username@host:<port>url-path password password;  
              }  
          }

**Hierarchy Level**    [edit system archival]

**Release Information**    Statement introduced before Junos OS Release 7.4.  
                              Statement introduced in Junos OS Release 9.0 for EX Series switches.  
                              Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Configure the router or switch to periodically transfer its currently active configuration (or after each commit).



.....  
**NOTE:** The [edit system archival] hierarchy is not available on QFabric systems.  
.....

**Options**    The remaining statements are explained separately.

**Required Privilege Level**    system—To view this statement in the configuration.  
                                  system-control—To add this statement to the configuration.

**Related Documentation**

- [Using Junos OS to Configure a Router or Switch to Transfer Its Configuration to an Archive Site on page 1133](#)
- [archive on page 5704](#)
- [archive-sites on page 1137](#)
- [transfer-interval on page 1139](#)
- [transfer-on-commit on page 1140](#)



## connection-limit

|                            |                                                                                                                                                                                                                                                                                                                                              |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>connection-limit <i>limit</i>;</code>                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>     | <code>[edit system services finger],</code><br><code>[edit system services ftp],</code><br><code>[edit system services netconf ssh],</code><br><code>[edit system services ssh],</code><br><code>[edit system services telnet],</code><br><code>[edit system services xnm-clear-text],</code><br><code>[edit system services xnm-ssl]</code> |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>                                                                                                                                |
| <b>Description</b>         | Configure the maximum number of connections sessions for each type of system services (finger, ftp, ssh, telnet, xnm-clear-text, or xnm-ssl) per protocol (either IPv6 or IPv4).                                                                                                                                                             |
| <b>Options</b>             | <p><i>limit</i>—(Optional) Maximum number of established connections per protocol (either IPv6 or IPv4).</p> <p><b>Range:</b> 1 through 250</p> <p><b>Default:</b> 75</p>                                                                                                                                                                    |



**NOTE:** The actual number of maximum connections depends on the availability of system resources, and might be fewer than the configured `connection-limit` value if the system resources are limited.

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• Configuring clear-text or SSL Service for Junos XML Protocol Client Applications</li> <li>• Configuring DTCP-over-SSH Service for the Flow-Tap Application</li> <li>• Configuring Finger Service for Remote Access to the Router</li> <li>• Configuring FTP Service for Remote Access to the Router or Switch</li> <li>• <a href="#">Configuring SSH Service for Remote Access to the Router or Switch on page 1229</a></li> <li>• Configuring Telnet Service for Remote Access to a Router or Switch</li> </ul> |



## contact

---

|                                 |                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>contact <i>contact</i>;</code>                                                                          |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                             |
| <b>Description</b>              | Define the value of the MIB II <b>sysContact</b> object, which is the contact person for the managed system.  |
| <b>Options</b>                  | <b>contact</b> —Name of the contact person. If the name includes spaces, enclose it in quotation marks (" "). |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring the System Contact on a Device Running Junos OS</li></ul>   |

## disable (LLDP)

---

|                                 |                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>disable;</code>                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit protocols <a href="#">lldp</a> ],<br>[edit protocols <a href="#">interface lldp</a> ]                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                              |
| <b>Description</b>              | Disable the LLDP configuration on the switch or on one or more interfaces.                                                                                                                                                                                                                                             |
| <b>Default</b>                  | If you do not configure LLDP, it is disabled on the switch and on specific switch interfaces.                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li><a href="#">show lldp on page 1351</a></li><li>Configuring LLDP (CLI Procedure)</li><li>Understanding 802.1X and LLDP and LLDP-MED on EX Series Switches</li><li><a href="#">Configuring LLDP on page 1214</a></li><li><a href="#">Understanding LLDP on page 1186</a></li></ul> |



## ethernet-switching-options

```
Syntax ethernet-switching-options {
  analyzer {
    name {
      input {
        egress {
          interface (all | interface-name);
        }
        ingress {
          interface (all | interface-name);
          vlan (vlan-id | vlan-name);
        }
      }
      output {
        interface interface-name;
        ip-address ip-address;
        vlan (vlan-id | vlan-name);
      }
    }
  }
  bpdv-block {
    interface (all | [interface-name]);
    disable-timeout timeout;
  }
  dot1q-tunneling {
    ether-type (0x8100 | 0x88a8 | 0x9100)
  }
  interfaces interface-name {
    no-mac-learning;
  }
  mac-table-aging-time seconds {
  }
  port-error-disable {
    disable-timeout timeout;
  }
  secure-access-port {
    dhcp-snooping-file {
      location local_pathname | remote_URL;
      timeout seconds;
      write-interval seconds;
    }
    interface (all | interface-name) {
      allowed-mac {
        mac-address-list;
      }
      (dhcp-trusted | no-dhcp-trusted);
      fcoe-trusted;
      mac-limit limit action action;
      no-allowed-mac-log;
    }
    vlan (all | vlan-name) {
      (arp-inspection | no-arp-inspection) [
        forwarding-class (for DHCP Snooping or DAI Packets) class-name;
      ]
    }
  }
}
```



```

dhcp-option82 {
  circuit-id {
    prefix (Circuit ID for Option 82) hostname;
    use-interface-description;
    use-vlan-id;
  }
  remote-id {
    prefix (Remote ID for Option 82) hostname | mac | none;
    use-interface-description;
    use-string string;
  }
  vendor-id <string>;
}
(examine-dhcp | no-examine-dhcp) {
  forwarding-class (for DHCP Snooping or DAI Packets) class-name;
}
examine-fip {
  examine-vn2vn {
    beacon-period milliseconds;
  }
  fc-map fc-map-value;
}
mac-move-limit limit <fabric-limit limit action action>;
}
}
storm-control {
  interface (all | interface-name) {
    bandwidth bandwidth;
    no-broadcast;
    no-multicast;
    no-unknown-unicast;
  }
}
traceoptions {
  file filename <files number> <no-stamp> <replace> <size size> <world-readable |
no-world-readable>;
  flag flag <disable>;
}
unknown-unicast-forwarding {
  vlan (all | vlan-name) {
    interface interface-name;
  }
}
}
}

```

Hierarchy Level [\[edit\]](#)

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure Ethernet switching options.

The remaining statements are explained separately.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.



- Related Documentation**
- [Understanding Port Mirroring on page 4313](#)
  - [Overview of Access Port Protection on page 4105](#)
  - [Understanding Storm Control on page 4125](#)
  - [Understanding Unknown Unicast Forwarding on page 4126](#)

## falling-threshold (Health Monitor)

---

|                                 |                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | falling-threshold <i>percentage</i> ;                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit snmp health-monitor]                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                      |
| <b>Description</b>              | Set the lower threshold for the monitored object when you configure a health monitor alarm. By setting a rising and a falling threshold for a monitored variable, you can be alerted whenever the value of the variable falls outside the allowable operational range. |
| <b>Options</b>                  | <p><i>percentage</i>—Lower threshold for the alarm entry.</p> <p><b>Range:</b> 1 through 100</p> <p><b>Default:</b> 70 percent of the maximum possible value</p>                                                                                                       |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">rising-threshold on page 1322</a></li> <li>• <a href="#">Configuring Health Monitoring on page 5544</a></li> </ul>                                                                                                |

## filter-duplicates

---

|                                 |                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | filter-duplicates;                                                                                                       |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                        |
| <b>Description</b>              | Filter duplicate <b>Get</b> , <b>GetNext</b> , or <b>GetBulk</b> SNMP requests.                                          |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p> |



## full-name

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>full-name <i>complete-name</i>;</code>                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit system login user]                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Configure the complete name of a user.                                                                                                                                                         |
| <b>Options</b>                  | <i>complete-name</i> —Full name of the user. If the name contains spaces, enclose it in quotation marks.                                                                                       |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring Junos OS User Accounts</li><li>user</li><li><a href="#">user on page 276</a></li></ul>                                                       |

## health-monitor

---

|                                 |                                                                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>health-monitor {<br/>    falling-threshold <i>percentage</i>;<br/>    interval <i>seconds</i>;<br/>    rising-threshold <i>percentage</i>;<br/>}</code>                   |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                               |
| <b>Description</b>              | Configure health monitoring.<br><br>The remaining statements are explained separately.                                                                                          |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li><a href="#">Configuring Health Monitoring on page 5544</a></li><li><a href="#">Understanding Health Monitoring on page 5474</a></li></ul> |



## hold-multiplier


---

|                                 |                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | hold-multiplier <i>number</i> ;                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit protocols <a href="#">lldp</a> ]                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for QFX Series.                                                                                                                                                                                                                                  |
| <b>Description</b>              | Specify the multiplier used in combination with the <a href="#">advertisement-interval</a> value to determine the length of time LLDP information is held before it is discarded. The default value is 4 (or 120 seconds).                                                                                                                                             |
| <b>Default</b>                  | Disabled.                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <i>number</i> —A number used as a multiplier.<br><b>Range:</b> 2 through 10<br><b>Default:</b> 4 (or 120 seconds)                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show lldp on page 1351</a></li> <li>• <a href="#">Configuring LLDP (CLI Procedure)</a></li> <li>• <a href="#">Understanding 802.1X and LLDP and LLDP-MED on EX Series Switches</a></li> <li>• <a href="#">Configuring LLDP on page 1214</a></li> <li>• <a href="#">Understanding LLDP on page 1186</a></li> </ul> |



## idle-timeout (Access)

---

|                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                             | <code>idle-timeout seconds;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>                                                                                                                                                                    | <code>[edit access group-profile <i>profile-name</i> ppp],</code><br><code>[edit access profile <i>profile-name</i> client <i>client-name</i> ppp]</code>                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>                                                                                                                                                                | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>                                                                                                                                                                        | <p>Configure the idle timeout for a user. The router might consider a PPP session to be idle because of the following reasons:</p> <ul style="list-style-type: none"><li>• There is no ingress traffic on the PPP session.</li><li>• There is no egress traffic.</li><li>• There is neither ingress or egress traffic on the PPP session.</li><li>• There is no ingress or egress PPP control traffic. This is applicable only if keepalives are enabled.</li></ul> |
| <b>Options</b>                                                                                                                                                                            | <p><b>seconds</b>—Number of seconds a user can remain idle before the session is terminated.</p> <p><b>Range:</b> 0 through 4,294,967,295 seconds</p> <p><b>Default:</b> 0</p>                                                                                                                                                                                                                                                                                      |
| <div> <b>NOTE:</b> The <code>[edit access]</code> hierarchy is not available on QFabric systems.</div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b>                                                                                                                                                           | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>                                                                                                                                                              | <ul style="list-style-type: none"><li>• Configuring the Group Profile for Defining L2TP Attributes</li><li>• Configuring PPP Properties for a Client-Specific Profile</li><li>• Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile</li></ul>                                                                                                                                                                                                 |



## interface (LLDP)

---

|                                 |                                                                                                                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>interface (all   <i>interface-name</i>) {     <b>disable</b>;     power-negotiation {         disable;     } }</pre>                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit protocols <b>lldp</b> ]                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>                                                                                                                         |
| <b>Description</b>              | Configure Link Layer Discovery Protocol (LLDP) on all interfaces or on a specific interface.                                                                                                                                                                                 |
| <b>Default</b>                  | None                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <p><b>all</b>—All interfaces on the switch.</p> <p><b><i>interface-name</i></b>—Name of a specific interface.</p> <p>The remaining statements are explained separately.</p>                                                                                                  |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring LLDP (CLI Procedure)</li> <li>Understanding 802.1X and LLDP and LLDP-MED on EX Series Switches</li> <li><a href="#">Configuring LLDP on page 1214</a></li> <li><a href="#">Understanding LLDP on page 1186</a></li> </ul> |



## interval (Health Monitor)

---

|                                 |                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | interval <i>seconds</i> ;                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit snmp health-monitor]                                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                            |
| <b>Description</b>              | Configure the interval between sampling of the object being monitored by the health monitor.                                                 |
| <b>Options</b>                  | <p><i>seconds</i>—Time between samples, in seconds.</p> <p><b>Range:</b> 1 through 2147483647 seconds</p> <p><b>Default:</b> 300 seconds</p> |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Health Monitoring on page 5544</a></li></ul>                                 |



## lldp

```
Syntax  lldp {
    advertisement-interval seconds;
    disable;
    hold-multiplier number;
    interface (all | [interface-name]) {
        disable;
        power-negotiation {
            disable;
        }
    }
    lldp-configuration-notification-interval seconds;
    management-address ip-management-address;
    netbios-snooping;
    ptopo-configuration-maximum-hold-time seconds;
    ptopo-configuration-trap-interval seconds;
    traceoptions {
        file filename <files number> <size size> <world-readable | no-world-readable>
        <no-stamp> <replace>;
        flag flag <disable>;
    }
    transmit-delay seconds;
}
```

**Hierarchy Level** [edit protocols]

**Release Information** Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.1 for QFX Series.

**Description** Configure Link Layer Discovery Protocol (LLDP). The switch uses LLDP to advertise its identity and capabilities on a LAN, as well as receive information about other network devices. LLDP is defined in the IEEE standard 802.1AB-2005.

The remaining statements are explained separately.



**NOTE:** The `transmit-delay` and `netbios-snooping` options are not available on QFabric systems.

**Default** LLDP is enabled.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [show lldp on page 1351](#)
- Configuring LLDP (CLI Procedure)
- Understanding 802.1X and LLDP and LLDP-MED on EX Series Switches



- [Configuring LLDP on page 1214](#)
- [Understanding LLDP on page 1186](#)

---

## lldp-configuration-notification-interval

---

|                                 |                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | lldp-configuration-notification-interval <i>seconds</i> ;                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit protocols <a href="#">lldp</a> ]                                                                                                                                         |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                      |
| <b>Description</b>              | Specify how often SNMP trap notifications are generated as a result of LLDP database changes. If the interval value is 0, trap notifications of database changes are disabled. |
| <b>Default</b>                  | SNMP trap notifications of LLDP database changes are disabled.                                                                                                                 |
| <b>Options</b>                  | <b>seconds</b> —Interval between trap notifications about LLDP database changes.<br><b>Range:</b> 0 through 3600                                                               |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                            |
| <b>Related Documentation</b>    | • <a href="#">show lldp on page 1351</a>                                                                                                                                       |

---

## location

---

|                                 |                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | location <i>location</i> ;                                                                                      |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                               |
| <b>Description</b>              | Define the value of the MIB II <b>sysLocation</b> object, which is the physical location of the managed system. |
| <b>Options</b>                  | <b>location</b> —Location of the local system. You must enclose the name within quotation marks (" ").          |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.   |
| <b>Related Documentation</b>    | • <a href="#">Configuring the System Location for a Device Running Junos OS</a>                                 |



## management-address

|                                 |                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>management-address <i>ip-management-address</i>;</code>                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit protocols <a href="#">lldp</a> ]                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.5 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                           |
| <b>Description</b>              | Specify the management address of the switch to be used in the LLDP Management type, length, and value (TLV) .                                                                                                                                                                      |
| <b>Default</b>                  | LLDP Management TLV uses the IP address of the switch's management Ethernet interface ( <b>me0</b> ) or the IP address of the virtual management Ethernet (VME) interface if the switch is a Virtual Chassis.                                                                       |
| <b>Options</b>                  | <i>ip-management-address</i> —You can specify either an IPv4 or IPv6 management address for the switch.                                                                                                                                                                             |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show lldp on page 1351</a></li> <li>• Understanding 802.1X and LLDP and LLDP-MED on EX Series Switches</li> <li>• EX Series Switches Interfaces Overview</li> <li>• <a href="#">Understanding LLDP on page 1186</a></li> </ul> |

## name

|                                 |                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>name <i>name</i>;</code>                                                                                |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                             |
| <b>Description</b>              | Set the system name from the command-line interface.                                                          |
| <b>Options</b>                  | <i>name</i> —System name override.                                                                            |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• Configuring the System Name</li> </ul>                               |



## nas-ip-address

---

|                                 |                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>nas-ip-address <i>ip-address</i>;</code>                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit system]                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.3.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Configure the NAS-IP address for outgoing RADIUS packets.                                                                                                                                  |
| <b>Options</b>                  | <b>ip-address</b> —IP address of the network access server (NAS) that requests user authentication.                                                                                        |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring RADIUS Authentication</li><li><a href="#">Configuring RADIUS Authentication on page 1219</a></li></ul>                                   |

## nonvolatile

---

|                                 |                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>nonvolatile {<br/>    <b>commit-delay</b> <i>seconds</i>;<br/>}</code>                                  |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                             |
| <b>Description</b>              | Configure options for SNMP <b>Set</b> requests.<br><br>The statement is explained separately.                 |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring the Commit Delay Timer</li><li>commit-delay</li></ul>       |



---

## oid


---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>oid <i>object-identifier</i> (exclude  include);</code>                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | <code>[edit snmp view <i>view-name</i>]</code>                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | Specify an object identifier (OID) used to represent a subtree of MIB objects.                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <p><b>exclude</b>—Exclude the subtree of MIB objects represented by the specified OID.</p> <p><b>include</b>—Include the subtree of MIB objects represented by the specified OID.</p> <p><b><i>object-identifier</i></b>—OID used to represent a subtree of MIB objects. All MIB objects represented by this statement have the specified OID as a prefix. You can specify the OID using either a sequence of dotted integers or a subtree name.</p> |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring MIB Views on page 554</a></li></ul>                                                                                                                                                                                                                                                                                                                                                  |



## order

---

|                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                               | <code>order (radius   [ <i>accounting-order-data-list</i> ] );</code>                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>                                                                                                                                                      | [edit access profile <i>profile-name</i> accounting]                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>                                                                                                                                                  | Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                               |
| <b>Description</b>                                                                                                                                                          | Configure the order of authentication, authorization, and accounting (AAA) servers to use while sending accounting messages and updates.                                                                                                                                                                                |
| <b>Default</b>                                                                                                                                                              | No order specified                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                                                                                                                                                              | <b>radius</b> —RADIUS accounting for specified subscribers.<br><br>[ <i>accounting-order-data-list</i> ]— Set of data listing the authentication order to be used, enclosed by brackets. This can be any combination of the authentication methods, up to and including a full list of the entire authentication order. |
| <div> <b>NOTE:</b> The [edit access] hierarchy is not available on QFabric systems.</div> |                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b>                                                                                                                                             | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                         |
| <b>Related Documentation</b>                                                                                                                                                | <ul style="list-style-type: none"><li>• Example: Connecting a RADIUS Server for 802.1X to an EX Series Switch</li><li>• Configuring 802.1X RADIUS Accounting (CLI Procedure)</li><li>• <a href="#">Configuring RADIUS Accounting on page 1217</a></li></ul>                                                             |



## port (RADIUS Server)

---

|                            |                                                                                                                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>port <i>port-number</i>;</code>                                                                                                                                                          |
| <b>Hierarchy Level</b>     | [edit system radius-server <i>address</i> ],<br>[edit system accounting destination radius server <i>address</i> ]                                                                             |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>         | Configure the port number on which to contact the RADIUS server.                                                                                                                               |
| <b>Options</b>             | <i>number</i> —Port number on which to contact the RADIUS server.<br><b>Default:</b> 1812 (as specified in RFC 2865)                                                                           |



**NOTE:** The [edit system accounting] hierarchy is not available on QFabric systems.

|                                 |                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring RADIUS Authentication</li> <li><a href="#">Configuring RADIUS Authentication on page 1219</a></li> </ul> |



## profile

**Syntax**    `profile profile-name {  
                   accounting {  
                     accounting-stop-on-access-deny;  
                     accounting-stop-on-failure;  
                     order ( radius | [ accounting-order-data-list ] );  
                   }  
                   authentication-order [ authentication-method ];  
                   radius {  
                     accounting-server [ server-addresses ];  
                     authentication-server [ server-addresses ];  
                   }  
                 }`

**Hierarchy Level**    [edit access]

**Release Information**    Statement introduced in Junos OS Release 9.0 for EX Series switches.  
                               Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Configure an access profile. The access profile contains the entire authentication, authorization, and accounting (AAA) configuration that aids in handling AAA requests, including the authentication method and order, AAA server addresses, and AAA accounting.

**Default**    Not enabled

**Options**    *profile-name*—Profile name of up to 32 characters.  
                   The remaining statements are explained separately.



**NOTE:** The [edit access] hierarchy is not available on QFabric systems.

**Required Privilege Level**    admin—To view this statement in the configuration.  
                                       admin-control—To add this statement to the configuration.

**Related Documentation**    • Example: Connecting a RADIUS Server for 802.1X to an EX Series Switch  
                                       • Configuring 802.1X RADIUS Accounting (CLI Procedure)  
                                       • [Configuring RADIUS Accounting on page 1217](#)



## protocols

```
Syntax protocols {
    bgp {
        disable;
        accept-remote-nexthop;
        advertise-external <conditional>;
        advertise-inactive;
        (advertise-peer-as | no-advertise-peer-as);
        authentication-algorithm (aes-128-cmac-96 | hmac-sha-1-96 | md5);
        authentication-key key;
        authentication-key-chain key-chain;
        bfd-liveness-detection {
            authentication {
                algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 |
                    meticulous-keyed-sha-1 | simple-password);
                key-chain key-chain-name;
                loose-check;
            }
            detection-time {
                threshold milliseconds;
            }
            hold-down-interval milliseconds;
            minimum-interval milliseconds;
            minimum-receive-interval milliseconds;
            multiplier number;
            no-adaptation;
            session-mode (automatic | multihop | single-hop);
            transmit-interval {
                minimum-interval milliseconds;
                threshold milliseconds;
            }
            version (1 | automatic);
        }
        cluster cluster-identifier;
        damping;
        description text-description;
        export [ policy-names ];
        family family-name {
            ... the family subhierarchies appear after the main [edit protocols bgp] hierarchy ...
        }
        graceful-restart {
            disable;
            restart-time seconds;
            stale-routes-time seconds;
        }
        group group-name {
            ... the group subhierarchy appears after the main [edit protocols bgp] hierarchy ...
        }
        hold-time seconds;
        import [ policy-names ];
        include-mp-next-hop;
        keep (all | none);
        local-address address;
    }
}
```



```
local-as autonomous-system <loops number> < alias> <private>;
local-preference local-preference;
log-updown;
metric-out (metric | igp (delay-med-update | offset) | minimum-igp offset);
mtu-discovery;
multihop {
    no-nexthop-change;
    ttl ttl-value;
}
no-aggregator-id;
no-client-reflect;
out-delay seconds;
outbound-route-filter {
    bgp-orf-cisco-mode;
    prefix-based {
        accept {
            inet;
            inet6;
        }
    }
}
passive;
path-selection {
    always-compare-med;
    as-path-ignore;
    cisco-non-deterministic;
    external-router-id;
    med-plus-igp {
        igp-multiplier number;
        med-multiplier number;
    }
}
peer-as autonomous-system;
preference preference;
remove-private;
tcp-mss segment-size;
traceoptions {
    file filename <files number> <size maximum-file-size> <world-readable |
        no-world-readable>;
    flag flag <flag-modifier> <disable>;
}
}
dcbx {
    disable;
    interface (interface-name | all) {
        disable;
        application-map application-map-name;
        applications {
            no-auto-negotiation;
        }
        enhanced-transmission-selection {
            no-auto-negotiation;
            recommendation-tlv {
                no-auto-negotiation;
            }
        }
    }
}
```



```

mode (auto-negotiate | ieee-dcbx | dcbx-version-1.01);
priority-flow-control {
    no-auto-negotiation;
}
}
}
iccp {
    authentication-key string;
    local-ip-addr local-ip-addr;
    peer ip-address {
        authentication-key string;
        backup-liveness-detection {
            backup-peer-ip ip-address;
        }
        liveness-detection {
            detection-time {
                threshold milliseconds;
            }
            minimum-interval milliseconds;
            minimum-receive-interval milliseconds;
            multiplier number;
            no-adaptation;
            transmit-interval {
                minimum-interval milliseconds;
                threshold milliseconds;
            }
            version (Liveness Detection) (1 | automatic);
        }
        local-ip-addr ipv4-address;
        session-establishment-hold-time seconds;
    }
    session-establishment-hold-time seconds;
    traceoptions {
        file <filename> <files number> <match regular-expression> <microsecond-stamp>
            <size size> <world-readable | no-world-readable>;
        flag flag;
        no-remote-trace;
    }
}
igmp-snooping {
    traceoptions {
        file filename <files number> <size size> <world-readable | no-world-readable> <match
            regex>;
        flag flag (detail | disable | receive | send);
    }
}
vlan vlan-name {
    disable {
        interface interface-name;
    }
    interface interface-name {
        group-limit limit;
        multicast-router-interface;
        static {
            group ip-address;
        }
    }
}

```



```
    robust-count number;
  }
}
isis {
  disable;
  export [ policy-names ];
  ignore-attached-bit;
  interface interface-name {
    bfd-liveness-detection {
      authentication {
        algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 |
          meticulous-keyed-sha-1 | simple-password);
        key-chain key-chain-name;
        loose-check;
      }
      detection-time {
        threshold milliseconds;
      }
      minimum-interval milliseconds;
      minimum-receive-interval milliseconds;
      multiplier number;
      no-adaptation;
      transmit-interval {
        minimum-interval milliseconds;
        threshold milliseconds;
      }
      version (1 | automatic);
    }
  }
  checksum;
  csnp-interval (seconds | disable);
  disable;
  hello-padding (adaptive | loose | strict);
  level (1 | 2) {
    disable;
    hello-authentication-key key;
    hello-authentication-type authentication;
    hello-interval seconds;
    hold-time seconds;
    ipv4-multicast-metric number;
    metric metric;
    passive;
    priority number;
  }
  lsp-interval milliseconds;
  mesh-group (value | blocked);
  no-ipv4-multicast;
  no-unicast-topology;
  passive;
  point-to-point;
}
level (1 | 2) {
  disable;
  authentication-key key;
  authentication-type authentication;
  external-preference preference;
  no-csnp-authentication;
```



```

    no-hello-authentication;
    no-psnp-authentication;
    preference preference;
    prefix-export-limit number;
    wide-metrics-only;
}
loose-authentication-check;
lsp-lifetime seconds;
max-areas number;
no-adjacency-holddown;
no-authentication-check;
no-ipv4-routing;
overload {
    advertise-high-metrics;
    timeout seconds;
}
reference-bandwidth reference-bandwidth;
rib-group {
    inet group-name;
}
topologies {
    ipv4-multicast;
}
traceoptions {
    file filename <files number> <size maximum-file-size> <world-readable |
        no-world-readable>;
    flag flag <flag-modifier> <disable>;
}
traffic-engineering {
    disable;
    family inet {
        shortcuts {
            multicast-rpf-routes;
        }
    }
}
}
lldp {
    disable;
    advertisement-interval seconds;
    hold-multiplier number;
    interface (LLDP) (all | interface-name) {
        disable;
    }
    traceoptions {
        file filename <files number> <size size> <world-readable | no-world-readable> <match
            regex>;
        flag flag (detail | disable | receive | send);
    }
}
mstp {
    disable;
    bpdu-timeout-action;
    bridge-priority priority;
    configuration-name (MSTP) name;
    forward-delay seconds;

```



```
hello-time seconds;
interface (all | interface-name) {
  disable;
  bpdu-timeout-action {
    block;
    alarm;
  }
  cost cost;
  edge;
  mode mode;
  no-root-port;
  priority priority;
}
max-age seconds;
max-hops hops;
msti msti-id {
  vlan (vlan-id | vlan-name);
  interface interface-name {
    disable;
    cost cost;
    edge;
    mode mode;
    priority priority;
  }
}
revision-level revision-level;
traceoptions {
  file filename <files number > <size size > <no-stamp | world-readable |
    no-world-readable>;
  flag flag;
}
}
ospf {
  disable;
  area area-id {
    area-range ip-prefix </prefix-length> <exact> <override-metric metric > <restrict>;
    context-identifier identifier
    interface interface-name {
      disable;
      authentication {
        md5 key-id key key-string <start-time YYYY-MM-DD.hh:mm>;
        simple-password key-string;
      }
      bandwidth-based-metrics {
        bandwidth value metric number;
      }
      bfd-liveness-detection {
        authentication {
          algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 |
            meticulous-keyed-sha-1 | simple-password);
          key-chain key-chain-name;
          loose-check;
        }
        detection-time {
          threshold milliseconds;
        }
      }
    }
  }
}
```



```

    full-neighbors-only;
    minimum-interval milliseconds;
    minimum-receive-interval milliseconds;
    multiplier number;
    no-adaptation;
    transmit-interval {
        minimum-interval milliseconds;
        threshold milliseconds;
    }
    version (1 | automatic);
}
dead-interval seconds;
dynamic-neighbors;
flood-reduction;
hello-interval seconds;
interface-type (nbma | p2mp | p2p);
metric metric;
neighbor address <eligible>;
no-eligible-backup;
no-interface-state-traps;
no-neighbor-down-notification;
passive {
    traffic-engineering {
        remote-node-id address;
    }
}
poll-interval seconds;
priority number;
retransmit-interval seconds;
secondary;
te-metric metric;
topology (name | default | ipv4-multicast) {
    disable;
    bandwidth-based-metrics {
        bandwidth value;
        metric number;
    }
    metric metric;
}
transit-delay seconds;
}
network-summary-export [ policy-names ];
network-summary-import [ policy-names ];
nssa {
    area-range ip-prefix</prefix-length> <exact> <override-metric metric> <restrict>;
    default-lsa {
        default-metric metric;
        metric-type type;
        type-7;
    }
    (summaries | no-summaries);
}
stub <default-metric metric> <summaries | no-summaries>;
virtual-link neighbor-id router-id transit-area area-id {
    disable;
    authentication {

```



```

        md5 key-id key key-string <start-time YYYY-MM-DD.hh:mm>;
        simple-password key-string;
    }
    dead-interval seconds;
    demand-circuit;
    flood-reduction;
    hello-interval seconds;
    ipsec-sa sa-name;
    no-neighbor-down-notification;
    retransmit-interval seconds;
    topology (name | default | ipv4-multicast) {
        disable;
        metric metric;
    }
    transit-delay seconds;
}
}
database-protection {
    ignore-count number;
    ignore-time seconds;
    maximum-lsa number;
    reset-time seconds;
    warning-only;
    warning-threshold percent;
}
export [ policy-names ];
external-preference preference;
graceful-restart {
    disable;
    helper-disable <both | restart-signaling | standard>;
    no-strict-lsa-checking;
    notify-duration seconds;
    restart-duration seconds;
}
import [ policy-names ];
no-nssa-abr;
no-rfc-1583;
overload <timeout seconds>;
preference preference;
prefix-export-limit number;
reference-bandwidth reference-bandwidth;
rib-group group-name;
topology (default | ipv4-multicast | name) {
    overload;
    prefix-export-limit number;
    topology-id number;
}
}
traceoptions {
    file filename <files number> <size maximum-file-size> <world-readable |
        no-world-readable>;
    flag flag <flag-modifier> <disable>;
}
}
traffic-engineering {
    advertise-unnumbered-interfaces;
    credibility-protocol-preference;
    ignore-lsp-metrics;
}

```



```

    multicast-rpf-routes;
    no-topology;
    shortcuts <lsp-metric-into-summary>;
  }
}
pim {
  disable;
  assert-timeout seconds;
  dense-groups {
    addresses;
  }
  dr-election-on-p2p;
  export;
  family (inet | inet6) {
    disable;
  }
  graceful-restart {
    disable;
    restart-duration seconds;
  }
  import [ policy-names ];
  interface interface-name {
    accept-remote-source;
    disable;
    family (inet | inet6) {
      disable;
    }
    hello-interval seconds;
    mode (dense | sparse | sparse-dense);
    neighbor-policy [ policy-names ];
    override-interval milliseconds;
    priority number;
    propagation-delay milliseconds;
    reset-tracking-bit;
    version version;
  }
  join-load-balance;
  join-prune-timeout;
  nonstop-routing;
  override-interval milliseconds;
  propagation-delay milliseconds;
  reset-tracking-bit;
  rib-group group-name;
  rp {
    auto-rp {
      (announce | discovery | mapping);
      (mapping-agent-election | no-mapping-agent-election);
    }
    bootstrap {
      family (inet | inet6) {
        export [ policy-names ];
        import [ policy-names ];
        priority number;
      }
    }
  }
  bootstrap-import [ policy-names ];
}

```



```
bootstrap-export [ policy-names ];
bootstrap-priority number;
dr-register-policy [ policy-names ];
embedded-rp {
  group-ranges {
    destination-ip-prefix</prefix-length>;
  }
  maximum-rps limit;
}
local {
  family (inet | inet6) {
    address address;
    anycast-pim {
      disable;
      rp-set {
        address address <forward-msdp-sa>;
      }
      local-address address;
    }
    group-ranges {
      destination-ip-prefix</prefix-length>;
    }
    hold-time seconds;
    priority number;
  }
}
rp-register-policy [ policy-names ];
spt-threshold {
  infinity [ policy-names ];
}
static {
  address address {
    group-ranges {
      version version;
      destination-ip-prefix</prefix-length>;
    }
  }
}
}
rpf-selection {
  group group-address {
    source source-address {
      next-hop next-hop-address;
    }
    wildcard-source {
      next-hop next-hop-address;
    }
  }
  prefix-list prefix-list-addresses {
    source source-address {
      next-hop next-hop-address;
    }
    wildcard-source {
      next-hop next-hop-address;
    }
  }
}
```



```

traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable>;
    flag flag <flag-modifier> <disable>;
}
tunnel-devices [ mt-fpc/pic/port ];
}
rip {
    authentication-key password;
    authentication-type type;
    (check-zero | no-check-zero);
    group group-name {
        bfd-liveness-detection {
            authentication {
                algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 |
                    meticulous-keyed-sha-1 | simple-password);
                key-chain key-chain-name;
                loose-check;
            }
            detection-time {
                threshold milliseconds;
            }
            minimum-interval milliseconds;
            minimum-receive-interval milliseconds;
            multiplier number;
            no-adaptation;
            transmit-interval {
                minimum-interval milliseconds;
                threshold milliseconds;
            }
            version (1 | automatic);
        }
    }
    export [ policy-names ];
    import [ policy-names ];
    metric-out metric;
    neighbor neighbor-name {
        any-sender;
        authentication-key password;
        authentication-type type;
        bfd-liveness-detection {
            ... same statements as at the [edit protocols rip group group-name
                bfd-liveness-detection] hierarchy level ...
        }
        (check-zero | no-check-zero);
        import [ policy-names ];
        message-size number;
        metric-in metric;
        receive (both | none | version-1 | version-2);
        route-timeout seconds;
        send (broadcast | multicast | none | version-1);
        update-interval seconds;
    }
    preference preference;
    route-timeout seconds;
    update-interval seconds;
}
holddown seconds;

```



```
import [ policy-names ];
message-size number;
metric-in metric;
receive (both | none | version-1 | version-2);
rib-group group-name;
route-timeout seconds;
send (broadcast | multicast | none | version-1);
traceoptions {
    file filename <files number> <size maximum-file-size> <world-readable |
        no-world-readable>;
    flag flag <flag-modifier> <disable>;
}
update-interval seconds;
}
rstp {
    disable;
    bpdu-block-on-edge;
    bridge-priority priority;
    forward-delay seconds;
    hello-time seconds;
    interface (all | interface-name) {
        disable;
        bpdu-timeout-action {
            alarm;
            block;
        }
        cost cost;
        edge;
        mode mode;
        no-root-port;
        priority priority;
    }
    max-age seconds;
}
traceoptions {
    file filename <files number> <size size> <no-stamp> <world-readable |
        no-world-readable>;
    flag flag;
}
}
stp {
    disable;
    bridge-priority priority;
    forward-delay seconds;
    hello-time seconds;
    interface (all | interface-name) {
        disable;
        bpdu-timeout-action {
            alarm;
            block;
        }
        cost cost;
        edge;
        mode mode;
        no-root-port;
        priority priority;
    }
}
```



```

    }
    max-age seconds;
  }
  traceoptions {
    file filename <files number> <size size> <no-stamp | world-readable |
      no-world-readable>;
    flag flag;
  }
  uplink-failure-detection {
    group group-name {
      link-to-monitor interface-name;
      link-to-disable interface-name;
    }
  }
}
vstp {
  bpdu-block-on-edge;
  disable (Spanning Trees);
  force-version (Spanning Trees) stp;
  vlan (Spanning Trees) vlan-id {
    bridge-priority (Spanning Trees) priority;
    forward-delay (Spanning Trees) seconds;
    hello-time (Spanning Trees) seconds;
    interface (Spanning Trees) (all | interface-name) {
      bpdu-timeout-action (Spanning Trees) {
        block (Spanning Trees);
        log (Spanning Trees);
      }
      cost (Spanning Trees) cost;
      disable (Spanning Trees);
      edge (Spanning Trees);
      mode (Spanning Trees) mode;
      no-root-port (Spanning Trees);
      priority (Spanning Trees) priority;
    }
    max-age (Spanning Trees) seconds;
    traceoptions (Spanning Trees) {
      file filename <files number> <size size> <no-stamp | world-readable |
        no-world-readable>;
      flag flag;
    }
  }
}
}
}

```

Hierarchy Level [\[edit\]](#)

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure protocols.

The remaining statements are explained separately.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.



**Related Documentation** • [Junos OS Routing Protocols Configuration Guide](#)

---

## protocol-version

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>protocol-version version;</code>                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit system services ssh]                                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Specify the secure shell (SSH) protocol version.                                                                                                                                               |
| <b>Default</b>                  | v2—SSH protocol version 2 is the default, introduced in Junos OS Release 11.4.                                                                                                                 |
| <b>Options</b>                  | <b>version</b> —SSH protocol version: v1, v2, or both.                                                                                                                                         |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                |
| <b>Related Documentation</b>    | • <a href="#">Configuring the SSH Protocol Version on page 1230</a>                                                                                                                            |

---

## ptopo-configuration-maximum-hold-time

---

|                                 |                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ptopo-configuration-maximum-hold-time seconds;</code>                                                                                                             |
| <b>Hierarchy Level</b>          | [edit protocols lldp]                                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                               |
| <b>Description</b>              | Configure how long to maintain the physical topology database entries. The physical topology identifies the devices on the network and their physical interconnections. |
| <b>Options</b>                  | <b>seconds</b> —Time to maintain physical topology database entries.<br><b>Default:</b> 300<br><b>Range:</b> 1 through 2147483647                                       |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                     |
| <b>Related Documentation</b>    | • <a href="#">show lldp on page 1351</a><br>• Understanding 802.1X and LLDP and LLDP-MED on EX Series Switches<br>• <a href="#">Understanding LLDP on page 1186</a>     |



---

## ptopo-configuration-trap-interval

---

|                                 |                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ptopo-configuration-trap-interval <i>seconds</i>;</code>                                                                             |
| <b>Hierarchy Level</b>          | [edit protocols <a href="#">lldp</a> ]                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.  |
| <b>Description</b>              | Specify how often SNMP trap notifications are sent regarding changes in physical topology global statistics.                               |
| <b>Default</b>                  | SNMP trap notifications of changes in physical topology global statistics are disabled.                                                    |
| <b>Options</b>                  | <b><i>seconds</i></b> —Interval between SNMP trap notifications about physical topology global statistics.<br><b>Range:</b> 0 through 3600 |
| <b>Required Privilege Level</b> | <b>routing</b> —To view this statement in the configuration.<br><b>routing-control</b> —To add this statement to the configuration.        |



## radius

---

**Syntax**    radius {  
              [accounting-server](#) [*server-addresses*];  
              [authentication-server](#) [*server-addresses*];  
              }

**Hierarchy Level**    [edit access profile *profile-name*]

**Release Information**    Statement introduced in Junos OS Release 9.0 for EX Series switches.  
                              Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Configure the RADIUS servers for authentication and for accounting. To configure multiple RADIUS servers, include multiple **radius** statements. The servers are tried in order and in a round-robin fashion until a valid response is received from one of the servers or until all the configured retry limits are reached.

The statements are explained separately.



---

**NOTE:** The [edit access] hierarchy is not available on QFabric systems.

---


**Required Privilege Level**    admin—To view this statement in the configuration.  
                                  admin-control—To add this statement to the configuration.

**Related Documentation**

- Example: Connecting a RADIUS Server for 802.1X to an EX Series Switch
- Configuring 802.1X RADIUS Accounting (CLI Procedure)
- Filtering 802.1X Supplicants Using RADIUS Server Attributes
- [Configuring RADIUS Accounting on page 1217](#)



## radius-options (edit system)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>radius-options {   attributes {     nas-ip-address <i>ip-address</i>;   }   password-protocol <i>mschap-v2</i>; }</pre>                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit system]                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 8.3.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>MS-CHAPv2 password protocol configuration option introduced in Junos OS Release 9.2.</p> <p>MS-CHAPv2 password protocol configuration option introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> |
|                                 | <div>  <p><b>NOTE:</b> The <code>radius-options</code> statement is not available on QFabric systems.</p> </div>                                                                                                                                                                                                                        |
| <b>Description</b>              | Configure RADIUS options for the NAS-IP address for outgoing RADIUS packets and password protocol used in RADIUS packets.                                                                                                                                                                                                                                                                                                |
| <b>Options</b>                  | <p><b><code>nas-ip-address <i>ip-address</i></code></b>—IP address of the network access server (NAS) that requests user authentication.</p> <p><b><code>password-protocol <i>mschap-v2</i></code></b>—Protocol MS-CHAPv2, used for password authentication and password changing.</p>                                                                                                                                   |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring RADIUS Authentication</li> <li><a href="#">Configuring RADIUS Authentication on page 1219</a></li> </ul>                                                                                                                                                                                                                                                              |



## radius-server

---

**Syntax**    `radius-server server-address {  
                  accounting-port port-number;  
                  port number;  
                  retry number;  
                  secret password;  
                  source-address source-address;  
                  timeout seconds;  
                  }`

**Hierarchy Level**    [edit system]

**Release Information**    Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Configure a RADIUS server for Point-to-Point Protocol (PPP).

To configure multiple RADIUS servers, include multiple **radius-server** statements. The servers are tried in order and in a round-robin fashion until a valid response is received from one of the servers or until all the configured retry limits are reached.

**Options**    **server-address**—Address of the RADIUS authentication server.

The remaining statements are explained separately.



.....  
**NOTE:** The **accounting-port** and **source-address** options are not available on QFabric systems.  
.....

**Required Privilege Level**    system—To view this statement in the configuration.  
                                  system-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring RADIUS Authentication on page 1219](#)
- [accounting-port on page 202](#)
- [port on page 1299](#)
- [retry on page 248](#)
- [secret on page 252](#)
- [source-address on page 256](#)
- [timeout on page 269](#)



## rate-limit

---

|                                 |                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>rate-limit <i>limit</i>;</code>                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | <code>[edit system services finger],</code><br><code>[edit system services ftp],</code><br><code>[edit system services netconf ssh],</code><br><code>[edit system services ssh],</code><br><code>[edit system services telnet],</code><br><code>[edit system services xnm-clear-text],</code><br><code>[edit system services xnm-ssl]</code> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>                                                                                                                                |
| <b>Description</b>              | Configure the maximum number of connections attempts per protocol (either IPv6 or IPv4) on an access service.                                                                                                                                                                                                                                |
| <b>Default</b>                  | 150 connections                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <p><b><code>rate-limit <i>limit</i></code></b>—(Optional) Maximum number of connection attempts allowed per minute, per IP protocol (either IPv4 or IPv6).</p> <p><b>Range:</b> 1 through 250</p> <p><b>Default:</b> 150</p>                                                                                                                 |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring clear-text or SSL Service for Junos XML Protocol Client Applications</li> </ul>                                                                                                                                                                                                           |




## remote-debug-permission

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | remote-debug-permission (qfabric-admin   qfabric-operator   qfabric-user);                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit system login user <i>username</i> authentication]<br>[edit system root-authentication]                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | (QFabric systems only) Configure authentication classes that permit or deny user access to individual components of the QFabric system.                                                                                                                                                                                                                                                |
| <b>Default</b>                  | qfabric-user                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <p><b>qfabric-admin</b>—Permits a user to log in to individual QFabric system components, view operations, and change component configurations.</p> <p><b>qfabric-operator</b>—Permits a user to log in to individual QFabric system components and view component operations.</p> <p><b>qfabric-user</b>—Prevents a user from logging in to individual QFabric system components.</p> |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring QFabric System Login Classes on page 1253</a></li><li>• <a href="#">request component login on page 1345</a></li><li>• <a href="#">Understanding QFabric System Login Classes on page 1204</a></li></ul>                                                                                                      |



## retry

|                                                                                                                                                                                                |                                                                                                                                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                  | <code>retry number;</code>                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>                                                                                                                                                                         | [edit system radius server <i>server-address</i> ],<br>[edit system accounting destination radius server <i>server-address</i> ]                                                                                                        |
| <b>Release Information</b>                                                                                                                                                                     | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                       |
| <b>Description</b>                                                                                                                                                                             | Number of times the router or switch is allowed to try to contact a RADIUS authentication or accounting server.                                                                                                                         |
| <b>Options</b>                                                                                                                                                                                 | <i>number</i> —Number of retries allowed for contacting a RADIUS server.<br><b>Range:</b> 1 through 10<br><b>Default:</b> 3                                                                                                             |
| <div>  <p><b>NOTE:</b> The [edit system accounting] hierarchy is not available on QFabric systems.</p> </div> |                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b>                                                                                                                                                                | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                       |
| <b>Related Documentation</b>                                                                                                                                                                   | <ul style="list-style-type: none"> <li>• <a href="#">Configuring RADIUS Authentication on page 1219</a></li> <li>• <a href="#">Configuring RADIUS Accounting on page 1217</a></li> <li>• <a href="#">timeout on page 269</a></li> </ul> |



## rising-threshold (Health Monitor)

---

|                                 |                                                                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>rising-threshold <i>percentage</i>;</code>                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit snmp health-monitor]                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                    |
| <b>Description</b>              | Set the upper threshold for the monitored object when you configure a health monitor alarm. By setting a rising and a falling threshold for a monitored object, you can be alerted whenever the value of the variable falls outside the allowable operational range. |
| <b>Options</b>                  | <p><b><i>percentage</i></b>—Upper threshold for the alarm entry.</p> <p><b>Range:</b> 1 through 100</p> <p><b>Default:</b> 80 percent of the maximum possible value</p>                                                                                              |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Health Monitoring on page 5544</a></li><li>• <a href="#">falling-threshold on page 1287</a></li></ul>                                                                                                |



## root-login

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | root-login (allow   deny   deny-password);                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit system services ssh]                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                   |
| <b>Description</b>              | Control user access through SSH.                                                                                                                                                                                                                                                                                                                                                 |
| <b>Default</b>                  | Allow user access through SSH.                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <p><b>allow</b>—Allow users to log in to the router or switch as root through SSH.</p> <p><b>deny</b>—Disable users from logging in to the router or switch as root through SSH.</p> <p><b>deny-password</b>—Allow users to log in to the router or switch as root through SSH when the authentication method (for example, RSA authentication) does not require a password.</p> |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the Root Login Through SSH on page 1230</a></li> </ul>                                                                                                                                                                                                                                                          |



## services (Switches)

---

**Syntax**

```
services {  
  service-deployment {  
    servers address {  
      port-number port-number;  
    }  
    source-address address;  
  }  
  ssh {  
    connection-limit limit;  
    protocol-version [v1 v2];  
    rate-limit limit;  
    root-login (allow | deny | deny-password);  
  }  
}
```

**Hierarchy Level** [edit system]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure the switch so that users on remote systems can access the local switch through SSH.

The remaining statements are explained separately.

**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.



## snmp

```

Syntax  snmp {
    client-list client-list-name {
        ip-addresses;
    }
    community community-name {
        authorization authorization;
        client-list-name client-list-name;
        clients {
            address restrict;
        }
        view view-name;
    }
    contact contact;
    description description;
    filter-duplicates;
    filter-interfaces;
    health-monitor {
        falling-threshold integer;
        interval seconds;
        rising-threshold integer;
    }
    interface [ interface-names ];
    location location;
    name name;
    nonvolatile {
        commit-delay seconds;
    }
    rmon {
        alarm index {
            description description;
            falling-event-index index;
            falling-threshold integer;
            falling-threshold-interval seconds;
            interval seconds;
            request-type;
            rising-event-index index;
            rising-threshold integer;
            sample-type (absolute-value | delta-value);
            startup-alarm (falling-alarm | rising-alarm | rising-or-falling alarm);
            syslog-subtag syslog-subtag;
            variable oid-variable;
        }
        event index {
            community community-name;
            description description;
            type type;
        }
        history history-index {
            bucket-size number;
            interface interface-name;
            interval seconds;
            owner owner-name;
        }
    }
}

```



```
    }
  }
  traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable> <match
      regular-expression>;
    flag flag;
  }
  trap-group group-name {
    categories {
      category;
    }
    destination-port port-number;
    targets {
      address;
    }
    version (all | v1 | v2);
  }
  trap-options {
    agent-address outgoing-interface;
    source-address address;
  }
  v3 {
    notify name {
      tag tag-name;
      type trap;
    }
    notify-filter profile-name {
      oid object-identifier (include | exclude);
    }
    snmp-community community-index {
      community-name community-name;
      security-name security-name;
      tag tag-name;
    }
    target-address target-address-name {
      address address;
      address-mask address-mask;
      port port-number;
      retry-count number;
      tag-list tag-list;
      target-parameters target-parameters-name;
      timeout seconds;
    }
    target-parameters target-parameters-name {
      notify-filter profile-name;
      parameters {
        message-processing-model (v1 | v2c | V3);
        security-level (authentication | none | privacy);
        security-model (usm | v1 | v2c);
        security-name security-name;
      }
    }
  }
  usm {
    local-engine {
      user username {
        authentication-sha {
```



```

        authentication-password authentication-password;
    }
    authentication-md5 {
        authentication-password authentication-password;
    }
    authentication-none;
    privacy-aes128 {
        privacy-password privacy-password;
    }
    privacy-des {
        privacy-password privacy-password;
    }
    privacy-3des {
        privacy-password privacy-password;
    }
    privacy-none;
}
}
remote-engine engine-id {
    user username {
        authentication-sha {
            authentication-password authentication-password;
        }
        authentication-md5 {
            authentication-password authentication-password;
        }
        authentication-none;
        privacy-aes128 {
            privacy-password privacy-password;
        }
        privacy-des {
            privacy-password privacy-password;
        }
        privacy-3des {
            privacy-password privacy-password;
        }
        privacy-none {
            privacy-password privacy-password;
        }
    }
}
}
}
vacm {
    access {
        group group-name {
            (default-context-prefix | context-prefix context-prefix) {
                security-model (any | usm | v1 | v2c) {
                    security-level (authentication | none | privacy) {
                        notify-view view-name;
                        read-view view-name;
                        write-view view-name;
                    }
                }
            }
        }
    }
}
}

```



```
security-to-group {  
  security-model (usm | v1 | v2c) {  
    security-name security-name {  
      group group-name;  
    }  
  }  
}  
}  
}  
}  
view view-name {  
  oid object-identifier (include | exclude);  
}  
}  
}
```

**Hierarchy Level**    [edit]

**Release Information**    Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Configure SNMP.

The remaining statements are explained separately.

**Required Privilege Level**    snmp—To view this statement in the configuration.  
snmp-control—To add this statement to the configuration.

**Related Documentation**

- [Understanding the Implementation of SNMP on page 5459](#)
- [Configuring SNMP on page 1223](#)



## source-address (SNMP)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | source-address <i>address</i> ;                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit snmp trap-options]                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | Set the source address of every SNMP trap packet sent by this switch to a single address regardless of the outgoing interface. If the source address is not specified, the default is to use the address of the outgoing interface as the source address.                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b>address</b>—Source address of SNMP traps. You can configure the source address of trap packets two ways: <b>lo0</b> or a valid IPv4 address configured on one of the interfaces. The value <b>lo0</b> indicates that the source address of all SNMP trap packets is set to the lowest loopback address configured at interface <b>lo0</b>.</p> <p><b>Default:</b> Disabled. (The source address is the address of the outgoing interface.)</p> |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring the Source Address for SNMP Traps</li> </ul>                                                                                                                                                                                                                                                                                                                                                      |



## ssh

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>ssh {<br/>  ciphers [ <i>cipher-1 cipher-2 cipher-3 ...</i>];<br/>  client-alive-count-max <i>seconds</i>;<br/>  client-alive-interval <i>seconds</i>;<br/>  connection-limit <i>limit</i>;<br/>  hostkey-algorithm &lt;<i>algorithm</i> no-<i>algorithm</i>&gt;;<br/>  key-exchange &lt;<i>algorithm</i>&gt;;<br/>  macs &lt;<i>algorithm</i>&gt;;<br/>  max-sessions-per-connection &lt;<i>number</i>&gt;;<br/>  no-tcp-forwarding;<br/>  protocol-version [<i>v1 v2</i>];<br/>  rate-limit <i>limit</i>;<br/>  root-login (<i>allow</i>   <i>deny</i>   <i>deny-password</i>);<br/>}</pre> |
| <b>Hierarchy Level</b>          | [edit system services]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> <p><b>client-alive-interval</b> and <b>client-alive-max-count</b> statements introduced in Junos OS Release 12.2.</p>                                                                                                                                                                                                                                                                |
| <b>Description</b>              | <p>Allow SSH requests from remote systems to the local router or switch.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring SSH Service for Remote Access to the Router or Switch on page 1229</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                   |



## tacplus-options

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> tacplus-options {   (exclude-cmd-attribute   no-cmd-attribute-value);   service-name <i>service-name</i>;   timestamp-and-timezone; } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit system]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Options for <b>no-cmd-attribute-value</b> and <b>exclude-cmd-attribute</b> introduced in Junos OS Release 9.3.</p> <p>Statement introduced in Junos OS Release 11.1 for QFX Series.</p> <p>Option for <b>timestamp-and-timezone</b> introduced in Junos OS Release 12.2.</p>                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | Configure TACACS+ options for authentication and accounting.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>                  | <p><b>exclude-cmd-attribute</b>—Exclude the <b>cmd</b> attribute value completely from start and stop accounting records to enable logging of accounting records in the correct log file on a TACACS+ server.</p> <p><b>no-cmd-attribute-value</b>—Set the <b>cmd</b> attribute value to an empty string in the TACACS+ accounting start and stop requests to enable logging of accounting records in the correct log file on a TACACS+ server.</p> <p><b>service-name <i>service-name</i></b>—Name of the authentication service used when you configure multiple TACACS+ servers to use the same authentication service.</p> <p><b>Default:</b> <code>junos-exec</code></p> <p><b>timestamp-and-timezone</b>—Include this statement if you want start time, stop time, and timezone attributes included in start/stop accounting records.</p> |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring TACACS+ Authentication</a></li> <li>• <a href="#">Configuring TACACS+ System Accounting</a></li> <li>• <a href="#">Junos OS Authentication Order for RADIUS, TACACS+, and Password Authentication on page 1196</a></li> <li>• <a href="#">Configuring TACACS+ Authentication on page 1231</a></li> <li>• <a href="#">Configuring TACACS+ System Accounting on page 1233</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                         |



## targets

---

|                                 |                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>targets {<br/>    <i>address</i>;<br/>}</code>                                                                                      |
| <b>Hierarchy Level</b>          | <code>[edit snmp trap-group <i>group-name</i>]</code>                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                         |
| <b>Description</b>              | Configure one or more systems to receive SNMP traps.                                                                                      |
| <b>Options</b>                  | <b><i>address</i></b> —IPv4 or IPv6 address of the system to receive traps. You must specify an address, not a hostname.                  |
| <b>Required Privilege Level</b> | <code>snmp</code> —To view this statement in the configuration.<br><code>snmp-control</code> —To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring SNMP Trap Groups on page 5538</a></li></ul>                               |



## traceoptions (LLDP)

**Syntax** `traceoptions {  
     file filename <files number> <size size> <world-readable | no-world-readable> <no-stamp>  
     <replace>;  
     flag flag <disable>;  
}`

**Hierarchy Level** [edit protocols [lldp](#)]

**Release Information** Statement introduced in Junos OS Release 9.0 for EX Series switches.  
 Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Define tracing operations for the Link Layer Discovery Protocol (LLDP). You can trace messages under LLDP for LLDP and PTOPO MIBs.



**NOTE:** The `traceoptions` statement is not supported on the QFX3000 QFabric system.

**Default** Tracing operations are disabled.

**Options** **file *filename***—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory `/var/log`.

**files *number***—(Optional) Maximum number of trace files. When a trace file named **trace-file** reaches its maximum size, it is renamed **trace-file.0**, then **trace-file.1**, and so on, until the maximum **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB number of trace files is reached. Then the oldest trace file is overwritten. If you specify a maximum number of files, you also must specify a maximum file size with the **size** option.

**Range:** 2 through 1000

**Default:** 3 files

**flag *flag***—Tracing operation to perform. To specify more than one tracing operation, include multiple flag statements. You can include the following flags:

- **all**—All tracing operations.
- **configuration**—Trace configuration operations.
- **interface**—Trace interface update events.
- **netbios**—Trace NetBIOS events.
- **packet**—Trace packet events.
- **rtsock**—Trace routing socket operations.
- **snmp**—Trace SNMP configuration operations.



- **vlan**—Trace VLAN update events.

**no-stamp**—(Optional) Do not timestamp the trace file.

**Default:** If you omit this option, timestamp information is placed at the beginning of each line of the tracing output.

**no-world-readable**—(Optional) Restrict file access to the user who created the file.

**replace**—(Optional) Replace an existing trace file if there is one rather than appending output to it.

**size size**—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches its maximum size, it is renamed **trace-file.0**, then **trace-file.1**, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten. If you specify a maximum number of files, you also must specify a maximum file size with the **files** option.

**Syntax:** **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

**Range:** 10 KB through 1 GB

**Default:** 128 KB

**Default:** If you do not include this option, tracing output is appended to an existing trace file.

**world-readable**—(Optional) Enable unrestricted file access.



.....  
**NOTE:** The **traceoptions** statement is not supported on the QFX3000 QFabric system.  
.....

**Required Privilege Level**    routing—To view this statement in the configuration.  
                                 routing-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring LLDP-MED \(CLI Procedure\)](#)
- [Understanding 802.1X and LLDP and LLDP-MED on EX Series Switches](#)
- [Configuring LLDP on page 1214](#)
- [Understanding LLDP on page 1186](#)



## transfer-interval (Configuration)

|                            |                                                                                                                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>transfer-interval <i>interval</i>;</code>                                                                                                                                                |
| <b>Hierarchy Level</b>     | [edit system archival configuration]                                                                                                                                                           |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>         | Configure the router or switch to periodically transfer its currently active configuration to an archive site.                                                                                 |



**NOTE:** The `edit system archival` hierarchy is not available on QFabric systems.

**Options** *interval*—Interval at which to transfer the current configuration to an archive site.  
**Range:** 15 through 2880 minutes



**NOTE:** The `[edit system archival]` hierarchy is not available on QFabric systems.

**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring the Transfer Interval for Periodic Transfer of the Active Configuration to an Archive Site on page 1134](#)
- [archive on page 5704](#)
- [configuration on page 1138](#)
- [transfer-on-commit on page 1140](#)



## transfer-on-commit

---

|                            |                                                                                                                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | transfer-on-commit;                                                                                                                                                                            |
| <b>Hierarchy Level</b>     | [edit system archival configuration]                                                                                                                                                           |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>         | Configure the router or switch to transfer its currently active configuration to an archive site each time you commit a candidate configuration.                                               |



NOTE: When specifying a URL in a Junos OS statement using an IPv6 host address, you must enclose the entire URL in quotation marks ( " ") and enclose the IPv6 host address in brackets ( [ ] ). For example, "ftp://username<:password>@[ipv6-host-address]<:port>/url-path" .



NOTE: The [edit system archival] hierarchy is not available on QFabric systems.

|                                 |                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Transfer of the Current Active Configuration When a Configuration Is Committed on page 1134</a></li><li>• <a href="#">archive on page 5704</a></li><li>• <a href="#">configuration on page 1138</a></li><li>• <a href="#">transfer-interval on page 1139</a></li></ul> |



## trap-group

|                                 |                                                                                                                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> trap-group <i>group-name</i> {     categories {         <i>category</i>;     }     destination-port <i>port-number</i>;     routing-instance <i>instance</i>;     targets {         <i>address</i>;     }     version (all   v1   v2); } </pre>                                    |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p>                                                                                                                                                     |
| <b>Description</b>              | Create a named group of hosts to receive the specified trap notifications. The name of the trap group is embedded in SNMP trap notification packets as one variable binding (varbind) known as the community name. At least one trap group must be configured for SNMP traps to be sent. |
| <b>Options</b>                  | <p><b><i>group-name</i></b>—Name of the trap group. If the name includes spaces, enclose it in quotation marks (" ").</p> <p>The remaining statements are explained separately.</p>                                                                                                      |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring SNMP Trap Groups</li> </ul>                                                                                                                                                                                                           |



## trap-options

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>trap-options {<br/>    agent-address outgoing-interface;<br/>    source-address address;<br/>}</pre>                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | <p>Using SNMP trap options, you can set the source address of every SNMP trap packet sent by the router or switch to a single address, regardless of the outgoing interface. In addition, you can set the agent address of each SNMPv1 trap. For more information about the contents of SNMPv1 traps, see RFC 1157.</p> <p>The remaining statements are explained separately.</p> |
| <b>Default</b>                  | Disabled                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring SNMP Trap Options</li></ul>                                                                                                                                                                                                                                                                                                     |



## user (Access)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> user username {   authentication {     (encrypted-password "password"   plain-text-password);     load-key-file URL;     remote-debug-permission (qfabric-admin   qfabric-operator   qfabric-user);     ssh-dsa "public-key" &lt;from hostname&gt;;     ssh-rsa "public-key" &lt;from hostname&gt;;   }   class class-name;   full-name "complete-name";   uid uid-value; } </pre> |
| <b>Hierarchy Level</b>          | [edit system login]                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | Configure access permission for individual users.                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | The remaining statements are explained separately.                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Junos OS User Accounts on page 1213</a></li> <li>• <a href="#">class on page 215</a></li> </ul>                                                                                                                                                                                                                         |



## version

---

|                                 |                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | version (all   v1   v2);                                                                                                         |
| <b>Hierarchy Level</b>          | [edit snmp trap-group <i>group-name</i> ]                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                |
| <b>Description</b>              | Specify the version number of SNMP traps.                                                                                        |
| <b>Default</b>                  | all—Send an SNMPv1 and SNMPv2 trap for every trap condition.                                                                     |
| <b>Options</b>                  | all—Send an SNMPv1 and SNMPv2 trap for every trap condition.<br><br>v1—Send SNMPv1 traps only.<br><br>v2—Send SNMPv2 traps only. |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring SNMP Trap Groups on page 5538</a></li></ul>                      |



# Administration

- [Routine Monitoring on page 1341](#)
- [Monitoring Commands on page 1342](#)

## Routine Monitoring

---

- [Monitoring SNMP on page 1341](#)

### Monitoring SNMP

There are several commands that you can access in Junos OS operational mode to monitor SNMP information. Some of the commands are:

- **show snmp health-monitor**, which displays the health monitor log and alarm information.
- **show snmp mib**, which displays information from the MIBs, such as device and system information.
- **show snmp statistics**, which displays SNMP statistics such as the number of packets, silent drops, and invalid output values.
- **show snmp rmon**, which displays the RMON alarm, event, history, and log information

The following example provides sample output from the **show snmp health-monitor** command:

```
user@switch> show snmp health-monitor
```

| Alarm |                                                                              |       |        |  |
|-------|------------------------------------------------------------------------------|-------|--------|--|
| Index | Variable description                                                         | Value | State  |  |
| 32768 | Health Monitor: root file system utilization<br>jnxHrStoragePercentUsed.1    | 58    | active |  |
| 32769 | Health Monitor: /config file system utilization<br>jnxHrStoragePercentUsed.2 | 0     | active |  |
| 32770 | Health Monitor: RE 0 CPU utilization<br>jnxOperatingCPU.9.1.0.0              | 0     | active |  |
| 32773 | Health Monitor: RE 0 Memory utilization<br>jnxOperatingBuffer.9.1.0.0        | 35    | active |  |
| 32775 | Health Monitor: jkernel daemon CPU utilization<br>Init daemon                | 0     | active |  |



|                  |           |
|------------------|-----------|
| Chassis daemon   | 50 active |
| Firewall daemon  | 0 active  |
| Interface daemon | 5 active  |
| SNMP daemon      | 11 active |
| MIB2 daemon      | 42 active |
| ...              |           |

The following example provides sample output from the **show snmp mib** command:

```
user@switch> show snmp mib walk system
```

```
sysDescr.0    = Juniper Networks, Inc. qfx3500s internet router, kernel
JUNOS 11.1-20100926.0 #0: 2010-09-26 06:17:38 UTC builder@abc.juniper.net:
/volume/build/junos/11.1/production/20100926.0/obj-xlr/bsd/sys/compile/JUNIPER-xxxxx
```

```
Build date: 2010-09-26 06:00:10 U
sysObjectID.0 = jnxProductQFX3500
sysUpTime.0   = 24444184
sysContact.0  = J Smith
sysName.0     = Lab QFX3500
sysLocation.0 = Lab
sysServices.0 = 4
```

The following example provides sample output from the **show snmp statistics** command:

```
user@switch> show snmp statistics
```

SNMP statistics:

Input:

```
Packets: 0, Bad versions: 0, Bad community names: 0,
Bad community uses: 0, ASN parse errors: 0,
Too bigs: 0, No such names: 0, Bad values: 0,
Read onlys: 0, General errors: 0,
Total request varbinds: 0, Total set varbinds: 0,
Get requests: 0, Get nexts: 0, Set requests: 0,
Get responses: 0, Traps: 0,
Silent drops: 0, Proxy drops: 0, Commit pending drops: 0,
Throttle drops: 0, Duplicate request drops: 0
```

Output:

```
Packets: 0, Too bigs: 0, No such names: 0,
Bad values: 0, General errors: 0,
Get requests: 0, Get nexts: 0, Set requests: 0,
Get responses: 0, Traps: 0
```

- Related Documentation
- [health-monitor on page 1288](#)
  - [show snmp mib on page 5790](#)
  - [show snmp statistics on page 1370](#)

---

## Monitoring Commands



## clear lldp neighbors

---

|                                 |                                                                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear lldp neighbors <interface <i>interface</i> >                                                                                                                                                 |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                    |
| <b>Description</b>              | Clear the learned remote neighbor information on all or selected interfaces.                                                                                                                       |
| <b>Options</b>                  | <p><b>none</b>—Clear the remote neighbor information on all interfaces.</p> <p><b>interface <i>interface</i></b>—(Optional) Clear the remote neighbor information from the selected interface.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• show lldp</li> <li>• <a href="#">Configuring LLDP on page 1214</a></li> <li>• <a href="#">Understanding LLDP on page 1186</a></li> </ul>                  |
| <b>List of Sample Output</b>    | <a href="#">clear lldp neighbors on page 1343</a><br><a href="#">clear lldp neighbors interface on page 1343</a>                                                                                   |

### Sample Output

|                                       |                                                        |
|---------------------------------------|--------------------------------------------------------|
| <b>clear lldp neighbors</b>           | user@switch> clear lldp neighbors                      |
| <b>clear lldp neighbors interface</b> | user@switch> clear lldp neighbors interface ge-0/1/1.0 |



## clear lldp statistics

---

|                                 |                                                                                                                                                           |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>clear lldp statistics</code><br><code>&lt;interface <i>interface</i>&gt;</code>                                                                     |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                           |
| <b>Description</b>              | Clear LLDP statistics on one or more interfaces.                                                                                                          |
| <b>Options</b>                  | <b>none</b> —Clears LLDP statistics on all interfaces.<br><br><b>interface <i>interface-names</i></b> —(Optional) Clear LLDP statistics on an interface.  |
| <b>Required Privilege Level</b> | view                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring LLDP on page 1214</a></li><li>• <a href="#">Understanding LLDP on page 1186</a></li></ul> |
| <b>List of Sample Output</b>    | <a href="#">clear lldp statistics on page 1344</a><br><a href="#">clear lldp statistics interface on page 1344</a>                                        |

## Sample Output

|                                              |                                                                         |
|----------------------------------------------|-------------------------------------------------------------------------|
| <code>clear lldp statistics</code>           | <code>user@switch&gt; clear lldp statistics</code>                      |
| <code>clear lldp statistics interface</code> | <code>user@switch&gt; clear lldp statistics interface ge-0/1/1.0</code> |



## request component login

|                                 |                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>request component login <i>component-name</i></code>                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | (QFabric systems only) Log in to a QFabric system component. To gain access to individual components by way of the <b>request component login</b> command, you must first provide the <b>qfabric-admin</b> or <b>qfabric-operator</b> class privilege to your user (for more information, see: <a href="#">remote-debug-permission</a> ). |
| <b>Options</b>                  | <b><i>component-name</i></b> —Specify the QFabric system component to which you wish to log in.                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | admin                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring QFabric System Login Classes on page 1253</a></li> <li>• <a href="#">remote-debug-permission on page 1320</a></li> <li>• <a href="#">Understanding QFabric System Login Classes on page 1204</a></li> </ul>                                                     |
| <b>List of Sample Output</b>    | <a href="#">request component login (with qfabric-admin Privileges) on page 1345</a><br><a href="#">request component login (with qfabric-operator Privileges) on page 1346</a><br><a href="#">request component login (with qfabric-user Privileges) on page 1346</a>                                                                    |

## Sample Output

The three sample output displays show the results of attempts to log in to Node device EE3093. The results differ depending on the privilege level assigned to the user.

**request component login (with**

```
admin@qfabric> request component login EE3093
Warning: Permanently added 'qfabric-node-ee3093,169.254.128.41' (RSA) to the list
of known hosts.
```



**qfabric-admin  
Privileges)**

```
--- JUNOS 11.3I built 2011-11-04 12:46:16 UTC
{master}
qfabric-admin@node-ee3093> ?
Possible completions:
  clear          Clear information in the system
  file           Perform file operations
  help          Provide help information
  load          Load information from file
  monitor       Show real-time debugging information
  mtrace        Trace multicast path from source to receiver
  op            Invoke an operation script
  ping          Ping remote target
  quit          Exit the management session
  request       Make system-level requests
  restart       Restart software process
  save          Save information to file
  set           Set CLI properties, date/time, craft interface message
  show          Show system information
  ssh           Start secure shell on another host
  start         Start shell
  telnet        Telnet to another host
  test          Perform diagnostic debugging
  traceroute    Trace route to remote host{master}
qfabric-admin@node-ee3093>
```

**request component  
login (with  
qfabric-operator  
Privileges)**

```
operator@qfabric> request component login EE3093
Warning: Permanently added 'qfabric-node-ee3093,169.254.128.41' (RSA) to the list
of known hosts.
--- JUNOS 11.3I built 2011-11-04 12:46:16 UTC
{master}
qfabric-operator@node-ee3093> ?
Possible completions:
  file           Perform file operations
  help          Provide help information
  load          Load information from file
  op            Invoke an operation script
  quit          Exit the management session
  request       Make system-level requests
  save          Save information to file
  set           Set CLI properties, date/time, craft interface message
  show          Show system information
  start         Start shell
  test          Perform diagnostic debugging
{master}
qfabric-operator@node-ee3093>
```

**request component  
login (with  
qfabric-user Privileges)**

```
user0@qfabric> request component login EE3093
error: User user0 does not have sufficient permissions to login to device ee3093
```



## show ethernet-switching interfaces

|                                 |                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show ethernet-switching interfaces<br><brief   detail   summary><br><interface <i>interface-name</i> >                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | Display information about switched Ethernet interfaces.                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <p><b>none</b>—(Optional) Display brief information for Ethernet-switching interfaces.</p> <p><b>brief   detail   summary</b>—(Optional) Display the specified level of output.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Display Ethernet-switching information for a specific interface.</p>                                                                   |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                            |
| <b>List of Sample Output</b>    | <a href="#">show ethernet-switching interfaces on page 1349</a><br><a href="#">show ethernet-switching interfaces summary on page 1349</a><br><a href="#">show ethernet-switching interfaces brief on page 1349</a><br><a href="#">show ethernet-switching interfaces detail on page 1349</a><br><a href="#">show ethernet-switching interfaces interface-name on page 1350</a> |
| <b>Output Fields</b>            | Table 96 on page 1347 lists the output fields for the <b>show ethernet-switching interfaces</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                |

**Table 96: show ethernet-switching interfaces Output Fields**

| Field Name          | Field Description                                      | Level of Output                                     |
|---------------------|--------------------------------------------------------|-----------------------------------------------------|
| <b>Interface</b>    | Name of a switching interface.                         | All levels                                          |
| <b>State</b>        | Interface state. Values are <b>up</b> or <b>down</b> . | none, <b>brief</b> , <b>detail</b> , <b>summary</b> |
| <b>VLAN members</b> | Name of a VLAN.                                        | none, <b>brief</b> , <b>detail</b> , <b>summary</b> |



Table 96: show ethernet-switching interfaces Output Fields (*continued*)

| Field Name               | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Level of Output                                     |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| <b>Blocking</b>          | <p>Forwarding state of the interface:</p> <ul style="list-style-type: none"> <li>• <b>blocked</b>—Traffic is not being forwarded on the interface.</li> <li>• <b>unblocked</b>—Traffic is forwarded on the interface.</li> <li>• <b>MAC limit exceeded</b>—The interface is temporarily disabled because of a MAC limiting error. The disabled interface is automatically restored to service when the disable timeout expires.</li> <li>• <b>MAC move limit exceeded</b>—The interface is temporarily disabled because of a MAC move limiting error. The disabled interface is automatically restored to service when the disable timeout expires.</li> <li>• <b>Storm control in effect</b> —The interface is temporarily disabled because of a storm control error. The disabled interface is automatically restored to service when the disable timeout expires.</li> <li>• <b>Storm control shutdown in effect</b> —The interface is temporarily disabled because of a storm control shutdown error. The disabled interface is automatically restored to service when the disable timeout expires.</li> </ul> | none, <b>brief</b> , <b>detail</b> , <b>summary</b> |
| <b>Index</b>             | VLAN index internal to Junos OS software.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>detail</b>                                       |
| <b>untagged   tagged</b> | Specifies whether the interface forwards IEEE802.1Q-tagged or untagged traffic.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>detail</b>                                       |



## Sample Output

show  
ethernet-switching  
interfaces

user@switch> show ethernet-switching interfaces

| Interface   | State | VLAN members | Blocking                  |
|-------------|-------|--------------|---------------------------|
| xe-0/0/0.0  | up    | T1122        | unblocked                 |
| xe-0/0/1.0  | down  | default      | – MAC limit exceeded      |
| xe-0/0/2.0  | down  | default      | – MAC move limit exceeded |
| xe-0/0/3.0  | down  | default      | – Storm control in effect |
| xe-0/0/4.0  | down  | default      | unblocked                 |
| xe-0/0/5.0  | down  | default      | unblocked                 |
| xe-0/0/6.0  | down  | default      | unblocked                 |
| xe-0/0/7.0  | down  | default      | unblocked                 |
| xe-0/0/8.0  | down  | default      | unblocked                 |
| xe-0/0/9.0  | up    | T111         | unblocked                 |
| xe-0/0/10.0 | down  | default      | unblocked                 |
| xe-0/0/11.0 | down  | default      | unblocked                 |
| xe-0/0/12.0 | down  | default      | unblocked                 |
| xe-0/0/13.0 | down  | default      | unblocked                 |
| xe-0/0/14.0 | down  | default      | unblocked                 |
| xe-0/0/15.0 | down  | default      | unblocked                 |
| xe-0/0/16.0 | down  | default      | unblocked                 |
| xe-0/0/17.0 | down  | default      | unblocked                 |
| xe-0/0/18.0 | down  | default      | unblocked                 |
| xe-0/0/19.0 | up    | T111         | unblocked                 |
| xe-0/1/0.0  | down  | default      | unblocked                 |
| xe-0/1/1.0  | down  | default      | unblocked                 |
| xe-0/1/2.0  | down  | default      | unblocked                 |
| xe-0/1/3.0  | down  | default      | unblocked                 |

show  
ethernet-switching  
interfaces summary

user@switch> show ethernet-switching interfaces summary

```
xe-0/0/0.0
xe-0/0/1.0
xe-0/0/2.0
xe-0/0/3.0
xe-0/0/8.0
xe-0/0/10.0
xe-0/0/11.0
```

show  
ethernet-switching  
interfaces brief

user@switch> show ethernet-switching interfaces brief

| Interface   | State | VLAN members  | Blocking  |
|-------------|-------|---------------|-----------|
| xe-0/0/0.0  | down  | default       | unblocked |
| xe-0/0/1.0  | down  | employee-vlan | unblocked |
| xe-0/0/2.0  | down  | employee-vlan | unblocked |
| xe-0/0/3.0  | down  | employee-vlan | unblocked |
| xe-0/0/8.0  | down  | employee-vlan | unblocked |
| xe-0/0/10.0 | down  | default       | unblocked |
| xe-0/0/11.0 | down  | employee-vlan | unblocked |

show  
ethernet-switching  
interfaces detail

user@switch> show ethernet-switching interfaces detail

```
Interface: xe-0/0/0.0 Index: 65
State: down
VLANs:
    default                untagged    unblocked

Interface: xe-0/0/1.0 Index: 66
State: down
```



```
VLANs:
  employee-vlan      untagged    unblocked

Interface: xe-0/0/2.0 Index: 67
State: down
VLANs:
  employee-vlan      untagged    unblocked

Interface: xe-0/0/3.0 Index: 68
State: down
VLANs:
  employee-vlan      untagged    unblocked

Interface: xe-0/0/8.0 Index: 69
State: down
VLANs:
  employee-vlan      untagged    unblocked

Interface: xe-0/0/10.0 Index: 70
State: down
VLANs:
  default            untagged    unblocked

Interface: xe-0/0/11.0 Index: 71
State: down
VLANs:
  employee-vlan      tagged      unblocked
```

**show**  
**ethernet-switching**  
**interfaces**  
**interface-name**

```
user@switch> show ethernet-switching interfaces xe-0/0/0.0
Interface  State  VLAN members  Blocking
xe-0/0/0.0  down   default       unblocked
```



## show lldp



|                                 |                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show lldp</code><br><code>&lt;detail&gt;</code>                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                |
| <b>Description</b>              | Display information about Link Layer Discovery Protocol (LLDP) and Link Level Discovery Protocol—Media Endpoint Discovery (LLDP-MED) configuration and capabilities on the switch. LLDP and LLDP-MED are used to learn about and to distribute device information on network links.                                                                                                  |
|                                 |  <p><b>NOTE:</b> LLDP-MED is not available on the QFX Series.</p>                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <b>none</b> —Display LLDP information for all interfaces.<br><br><b>detail</b> —(Optional) Display detailed LLDP information for all interfaces.                                                                                                                                                                                                                                     |
|                                 |  <p><b>NOTE:</b> <b>fast-start</b> is not available on the QFX Series.</p>                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring LLDP (CLI Procedure)</a></li> <li>• <a href="#">Configuring LLDP-MED (CLI Procedure)</a></li> <li>• <a href="#">Understanding 802.1X and LLDP and LLDP-MED on EX Series Switches</a></li> <li>• <a href="#">Configuring LLDP on page 1214</a></li> <li>• <a href="#">Understanding LLDP on page 1186</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show lldp on page 1355</a><br><a href="#">show lldp detail on page 1355</a>                                                                                                                                                                                                                                                                                              |
| <b>Output Fields</b>            | <a href="#">Table 97 on page 1352</a> lists the output fields for the <b>show lldp</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                              |



Table 97: show lldp Output Fields

| Field Name             | Field Description                                                                                                                                                                                                                                                                                                                                                                                                  | Level of Output |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| LLDP                   | LLDP operating state. The state can be <b>enabled</b> or <b>disabled</b> .<br><br><b>NOTE:</b> If a VLAN that has been configured for untagged packets on an interface also has Layer 2 protocol tunneling (L2PT) enabled for LLDP, the LLDP operating state for that interface is displayed as <b>disabled</b> .                                                                                                  | All levels      |
| Advertisement interval | Frequency, in seconds, at which LLDP advertisements are sent.<br><br>This value is set by the <b>advertisement-interval</b> configuration statement.                                                                                                                                                                                                                                                               | All levels      |
| Transmit delay         | Seconds of delay before advertisements are sent to neighbors following a change to a TLV (type, length, or value) element in the LLDP protocol or to the state of the local system, such as a change in hostname or management address. You can set this value to reduce the delay in notifying neighbors of a change in the local system.<br><br>This value is set by the transmit-delay configuration statement. | All levels      |
| Hold timer             | Multiplier used in combination with the <b>advertisement-interval</b> value to determine the length of time LLDP information is held before it is discarded.<br><br>This value is set by the <b>hold-multiplier</b> configuration statement.                                                                                                                                                                       | All levels      |
| Notification interval  | How often LLDP trap notifications are generated as a result of LLDP database changes. If the interval value is 0, LLDP trap notifications of database changes are disabled.<br><br>This value is set by the <b>lldp-configuration-notification-interval</b> configuration statement.                                                                                                                               | All levels      |
| Config Trap Interval   | How often LLDP trap notifications are generated as a result of changes in topology—for example, when an endpoint connects or disconnects. If the interval value is 0, LLDP trap notifications of topology changes are disabled.<br><br>This value is set by the <b>ptopo-configuration-trap-interval</b> configuration statement.                                                                                  | All levels      |
| Connection Hold timer  | Amount of time the system maintains dynamic topology entries.<br><br>This value is set by the <b>ptopo-configuration-maximum-hold-time</b> configuration statement.                                                                                                                                                                                                                                                | All levels      |
| LLDP-MED               | LLDP-MED operating state. The state can be <b>enabled</b> or <b>disabled</b> .                                                                                                                                                                                                                                                                                                                                     | All levels      |
| MED fast start count   | Number of advertisements sent from a switch to a device, such as a VoIP telephone, when the device is first detected by the switch. These increased advertisements are temporary. After a device and a switch exchange information and can communicate, advertisements are reduced to one per second.<br><br>This value is set by the <b>fast-start</b> configuration statement.                                   | All levels      |
| Interface              | Name of the interface for which LLDP configuration information is being reported.                                                                                                                                                                                                                                                                                                                                  | All levels      |
| Parent Interface       | Name of the aggregated Ethernet interface, if any, to which the interface belongs.                                                                                                                                                                                                                                                                                                                                 | All levels      |



Table 97: show lldp Output Fields (*continued*)

| Field Name                       | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Level of Output |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>LLDP</b>                      | LLDP operating state. The state can be <b>enabled</b> or <b>disabled</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | All levels      |
| <b>Power Negotiation</b>         | LLDP power negotiation operating state. The state can be <b>Enabled</b> or <b>Disabled</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | All levels      |
| <b>Neighbor count</b>            | Total number of new LLDP neighbors detected since the last switch reboot.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>detail</b>   |
| <b>Interface</b>                 | Name of the interface that is advertising VLAN information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | All levels      |
| <b>Vlan-id</b>                   | VLAN tag associated with the interface sending LLDP frames. If the interface is not a member of a VLAN, the VLAN ID is advertised as 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <b>detail</b>   |
| <b>Vlan-name</b>                 | VLAN name associated with the VLAN ID.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>detail</b>   |
| <b>LLDP basic TLVs supported</b> | <p>Basic TLVs supported on the switch:</p> <ul style="list-style-type: none"> <li>• <b>Chassis identifier</b>—TLV that advertises the MAC address associated with the local system.</li> <li>• <b>Port identifier</b>—TLV that advertises the port identification for the specified port in the local system.</li> <li>• <b>Port description</b>—Interface name for the port.</li> <li>• <b>System name</b>—TLV that advertises the user-configured name of the local system.</li> <li>• <b>System description</b>—TLV that advertises the system description containing information about the software and current image running on the system. This information is taken from the software and is not configurable.</li> <li>• <b>System capabilities</b>—TLV that advertises the primary functions performed by the system—for example, bridge or router.</li> <li>• <b>Management address</b>—TLV that advertises the IP management address of the local system.</li> </ul> | <b>detail</b>   |
| <b>Supported LLDP 802 TLVs</b>   | <p>802.3 TLVs supported on the switch:</p> <ul style="list-style-type: none"> <li>• <b>MAC/PHY configuration status</b>—TLV that advertises information about the physical interface, such as autonegotiation status and support and MAU type. The information is based on the physical interface structure and is not configurable.</li> <li>• <b>Power via MDI</b>—TLV that advertises MDI power support, PSE power pair, and power class information.</li> <li>• <b>Link aggregation</b>—TLV that advertises if the interface is aggregated and its aggregated interface ID.</li> <li>• <b>Maximum frame size</b>—TLV that advertises the maximum transmission unit (MTU) of the interface sending LLDP frames.</li> <li>• <b>Port VLAN tag</b>—TLV that advertises the VLAN tag configured on the interface.</li> <li>• <b>Port VLAN name</b>—TLV that advertises the VLAN name configured on the interface.</li> </ul>                                                     | <b>detail</b>   |



Table 97: show lldp Output Fields (*continued*)

| Field Name                     | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Level of Output |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Supported LLDP MED TLVs</b> | <p>LLDP-MED TLVs supported on the switch:</p> <ul style="list-style-type: none"> <li>• <b>LLDP MED capabilities</b>—TLV that advertises the primary function of the port. The capabilities values range from 0 through 15: <ul style="list-style-type: none"> <li>• 0—Capabilities</li> <li>• 1—Network Policy</li> <li>• 2—Location Identification</li> <li>• 3—Extended Power via MDI-PSE</li> <li>• 4—Inventory</li> <li>• 5–15—Reserved</li> </ul> </li> <li>• <b>Network policy</b>—TLV that advertises the port VLAN configuration and associated Layer 2 and Layer 3 attributes. Attributes include the policy identifier, application types—such as voice or streaming video—802.1Q VLAN tagging, and 802.1p priority bits and DiffServ code points.</li> <li>• <b>Endpoint location</b>—TLV that advertises the physical location of the endpoint.</li> <li>• <b>Extended power Via MDI</b>—TLV that advertises the power type, power source, power priority, and power value of the port. It is the responsibility of the PSE device (network connectivity device) to advertise the power priority on a port.</li> </ul> | <b>detail</b>   |



## Sample Output

### show lldp

```
user@switch> show lldp
LLDP : Enabled
Advertisement interval : 30 seconds
Transmit delay : 2 seconds
Hold timer : 4 seconds
Notification interval : 0 Second(s)
Config Trap Interval : 0 seconds
Connection Hold timer : 300 seconds

LLDP MED : Disabled
MED fast start count : 3 Packets
```

| Interface | Parent Interface | LLDP    | LLDP-MED | Power Negotiation |
|-----------|------------------|---------|----------|-------------------|
| all       | -                | Enabled | Enabled  | Enabled           |

### show lldp detail

```
user@switch> show lldp detail
LLDP : Enabled
Advertisement interval : 30 seconds
Transmit delay : 2 seconds
Hold timer : 4 seconds
Notification interval : 0 Second(s)
Config Trap Interval : 0 seconds
Connection Hold timer : 300 seconds

LLDP MED : Disabled
MED fast start count : 3 Packets
```

| Interface      | Parent Interface | LLDP    | LLDP-MED | Power Negotiation |
|----------------|------------------|---------|----------|-------------------|
| Neighbor count |                  |         |          |                   |
| all            | -                | Enabled | Enabled  | Enabled           |
| 8              |                  |         |          |                   |

| Interface  | Parent Interface | Vlan-id | Vlan-name |
|------------|------------------|---------|-----------|
| xe-3/0/0.0 | ae31.0           | 100     | v100      |
| xe-3/0/0.0 | ae31.0           | 101     | v101      |
| xe-3/0/0.0 | ae31.0           | 4000    | v4000     |
| xe-3/0/1.0 | ae31.0           | 100     | v100      |
| xe-3/0/1.0 | ae31.0           | 101     | v101      |
| xe-3/0/1.0 | ae31.0           | 4000    | v4000     |
| xe-3/0/2.0 | ae31.0           | 100     | v100      |
| xe-3/0/2.0 | ae31.0           | 101     | v101      |
| xe-3/0/2.0 | ae31.0           | 4000    | v4000     |

#### LLDP basic TLVs supported:

Chassis identifier, Port identifier, Port description, System name, System description, System capabilities, Management address.

#### Supported LLDP 802 TLVs:

MAC/PHY configuration/status, Power via MDI, Link aggregation, Maximum frame size, Port VLAN tag, Port VLAN name.

#### Supported LLDP MED TLVs:

LLDP MED capabilities, Network policy, Endpoint location, Extended power Via MDI.







## show lldp local-information

|                                 |                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show lldp local-information                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                 |
| <b>Description</b>              | Display the information that the switch provides in Link Layer Discovery Protocol (LLDP) advertisements to its neighbors.                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring LLDP (CLI Procedure)</li> <li>Understanding 802.1X and LLDP and LLDP-MED on EX Series Switches</li> <li><a href="#">management-address on page 1295</a></li> <li><a href="#">Configuring LLDP on page 1214</a></li> <li><a href="#">Understanding LLDP on page 1186</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show lldp local-information (EX Series Switch) on page 1358</a>                                                                                                                                                                                                                                                           |
| <b>Output Fields</b>            | <a href="#">Table 98 on page 1357</a> lists the output fields for the <b>show lldp local-information</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                             |

**Table 98: show lldp local-information Output Fields**

| Field Name                            | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LLDP Local Information details</b> | <p>Information about the local system (the switch):</p> <ul style="list-style-type: none"> <li><b>Chassis ID</b>—MAC address associated with the switch.</li> <li><b>System name</b>—User-configured name of the switch.</li> <li><b>System descr</b>—System description containing information about the switch model and the current software image running on the switch. This information is taken from the software and is not configurable.</li> </ul>                                                                                                                                                                                                                                 |
| <b>System Capabilities</b>            | Capabilities (such as <b>bridge</b> or <b>router</b> ) that are supported or enabled on the system.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Management Information</b>         | <p>Details of the management information: <b>Port Name</b>, <b>Port Address</b> (such as 10.204.34.35), <b>Address Type</b> (such as <b>ipv4</b> or <b>ipv6</b>), <b>Port ID</b> (SNMP interface index), <b>Port ID Subtype</b>, and <b>Port Subtype</b>.</p> <p>The <b>Port Subtype</b> displays:</p> <ul style="list-style-type: none"> <li><b>ifindex(2)</b>—IP address of the switch's management Ethernet interface (<b>me0</b>) or virtual management Ethernet (<b>VME</b>) interface address (for a virtual chassis) is used to manage the switch.</li> <li><b>unknown(1)</b>—IP management address has been configured with set <b>protocols lldp management-address</b>.</li> </ul> |



Table 98: show lldp local-information Output Fields (*continued*)

| Field Name                   | Field Description                                                                        |
|------------------------------|------------------------------------------------------------------------------------------|
| <b>Interface name</b>        | Name of the local interface which is configured for either LLDP or LLDP-MED.             |
| <b>Parent Interface</b>      | Name of the aggregated Ethernet interface, if any, to which the local interface belongs. |
| <b>SNMP Index</b>            | SNMP interface index.                                                                    |
| <b>Interface description</b> | User-configured port description.                                                        |
| <b>Status</b>                | Administrative status of the interface: either <b>up</b> or <b>down</b> .                |
| <b>Tunneling</b>             | Status of tunneling on the interface: either <b>enabled</b> or <b>disabled</b> .         |

## Sample Output

**show lldp  
local-information (EX  
Series Switch)**

```
user@switch> show lldp local-information
```

```
LLDP Local Information details
```

```
Chassis ID   : 00:1d:b5:aa:b9:f0
System name  : switch
System descr : Juniper Networks, Inc. ex8208 , version 10.4I0 [builder] Build
               date: 2010-11-17 12:38:30 UTC
```

```
System Capabilities
```

```
Supported   : Bridge Router
Enabled     : Bridge Router
```

```
Management Information
```

```
Port Name    : -
Port Address  : 10.93.54.6
Address Type  : IPv4
Port ID       : 34
Port ID Subtype : local(7)
Port Subtype  : ifIndex(2)
```

| Interface name | Parent Interface | SNMP Index | Interface description | Status | Tunneling |
|----------------|------------------|------------|-----------------------|--------|-----------|
| me0.0          | -                | 34         | -                     | Down   | Disabled  |
| xe-3/0/0.0     | ae31.0           | 769        | xe-3/0/0.0            | Up     | Disabled  |
| xe-3/0/1.0     | ae31.0           | 770        | xe-3/0/1.0            | Up     | Disabled  |
| xe-3/0/2.0     | ae31.0           | 771        | xe-3/0/2.0            | Up     | Disabled  |
| xe-3/0/3.0     | ae31.0           | 772        | xe-3/0/3.0            | Up     | Disabled  |
| xe-3/0/4.0     | ae31.0           | 577        | xe-3/0/4.0            | Up     | Disabled  |
| xe-3/0/5.0     | ae31.0           | 578        | xe-3/0/5.0            | Up     | Disabled  |
| xe-3/0/6.0     | ae31.0           | 579        | xe-3/0/6.0            | Up     | Disabled  |
| xe-3/0/7.0     | ae31.0           | 581        | xe-3/0/7.0            | Up     | Disabled  |



## show lldp neighbors

**Syntax** <show lldp *neighbors*>  
<interface *interface-ids*>

**Release Information** Command introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Display learned information about Link Layer Discovery Protocol (LLDP) on all neighboring interfaces or on selected interfaces.

**Options** **none**—Display learned LLDP information on all neighboring interfaces and devices.

**interface *interface-ids***—(Optional) Display learned LLDP information on the selected interfaces or devices.



**NOTE:** When a port with DCBX enabled begins to exchange type, length, and value (TLV) entries, optional LLDP TLVs on that port are not advertised to neighbors in order to interoperate with a wider variety of converged network adapters (CNAs). As a result, information for those ports will not be listed in the output for this command.

**Required Privilege Level** view

**Related Documentation**

- [Configuring LLDP on page 1214](#)
- [Understanding LLDP on page 1186](#)

**List of Sample Output** [show lldp neighbors on page 1362](#)  
[show lldp neighbors interface on page 1362](#)

**Output Fields** [Table 99 on page 1359](#) lists the output fields for the **show lldp neighbors** command. Output fields are listed in the approximate order in which they appear.

**Table 99: show lldp neighbors Output Fields**

| Field Name       | Field Description                                                                                        |
|------------------|----------------------------------------------------------------------------------------------------------|
| Local Interface  | List of local interfaces for which neighbor information is available.                                    |
| Parent Interface | List of aggregated Ethernet interfaces, if any, to which the local interfaces belong.                    |
| Chassis ID       | List of chassis identifiers for neighbors.                                                               |
| Port info        | List of port information gathered from neighbors. This could be the port identifier or port description. |
| System name      | List of system names gathered from neighbors.                                                            |



Table 99: show lldp neighbors Output Fields (*continued*)

| Field Name                       | Field Description                                                                                                                                                                                                                                                     |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LLDP Neighbor Information</b> | Information about both the local system (the switch) and a neighbor system on the interface (appears when the <b>interface</b> option is used).                                                                                                                       |
| <b>Local Information</b>         | Information about the local system (appears when the <b>interface</b> option is used).                                                                                                                                                                                |
| <b>Index</b>                     | Local interface index (appears when the <b>interface</b> option is used).                                                                                                                                                                                             |
| <b>Time to live</b>              | Number of seconds for which this information is valid (appears when the <b>interface</b> option is used).                                                                                                                                                             |
| <b>Time mark</b>                 | Date and timestamp of information (appears when the <b>interface</b> option is used).                                                                                                                                                                                 |
| <b>Local Interface</b>           | Name of the local physical interface (appears when the <b>interface</b> option is used).                                                                                                                                                                              |
| <b>Parent Interface</b>          | Name of the aggregated Ethernet interface, if any, to which the interface belongs (appears when the <b>interface</b> option is used).                                                                                                                                 |
| <b>Local Port ID</b>             | Local interface SNMP index (appears when the <b>interface</b> option is used).                                                                                                                                                                                        |
| <b>Ageout Count</b>              | Number of times the complete set of information advertised by the neighbor has been deleted from LLDP neighbor information maintained by the local system because the information timeliness interval has expired (appears when the <b>interface</b> option is used). |
| <b>Neighbor Information</b>      | Information about a neighbor system on the interface (appears when the <b>interface</b> option is used).                                                                                                                                                              |
| <b>Chassis type</b>              | Type of chassis identifier supplied, such as <b>MAC address</b> (appears when the <b>interface</b> option is used).                                                                                                                                                   |
| <b>Chassis ID</b>                | Chassis identifier of the chassis type listed (appears when the <b>interface</b> option is used).                                                                                                                                                                     |
| <b>Port type</b>                 | Type of port identifier supplied, such as <b>locally assigned</b> (appears when the <b>interface</b> option is used).                                                                                                                                                 |
| <b>Port ID</b>                   | Port identifier of the port type listed (appears when the <b>interface</b> option is used).                                                                                                                                                                           |
| <b>Port description</b>          | Port description (appears when the <b>interface</b> option is used).                                                                                                                                                                                                  |
| <b>System name</b>               | Name supplied by the system on the interface (appears when the <b>interface</b> option is used).                                                                                                                                                                      |
| <b>System Description</b>        | Description supplied by the system on the interface (appears when the <b>interface</b> option is used).                                                                                                                                                               |



Table 99: show lldp neighbors Output Fields (*continued*)

| Field Name          | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System capabilities | Capabilities (such as <b>Bridge</b> , <b>Router</b> , and <b>Telephone</b> ) that are supported or enabled by the system on the interface (appears when the <b>interface</b> option is used).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Management Info     | <p>Details of management information: <b>Type</b> (such as <b>ipv4</b> or <b>ipv6</b>), <b>Address</b> (such as <b>10.204.34.35</b>), <b>Port ID</b>, <b>Subtype</b>, <b>Interface Subtype</b>, and organization identifier (<b>OID</b>) (appears when the <b>interface</b> option is used).</p> <p>The <b>Interface Subtype</b> displays:</p> <ul style="list-style-type: none"> <li>• <b>ifindex(2)</b>— IP address of the neighbor's management Ethernet interface (<b>me0</b>) or virtual management Ethernet (<b>VME</b>) interface address (for a virtual chassis) is used to manage the switch.</li> <li>• <b>unknown(1)</b>—Neighbor's IP management address has been configured with set <b>protocols lldp management-address</b>.</li> </ul> |
| Media Info          | Additional details about the endpoint device appear when a device that supports LLDP-MED is attached to the interface. The specific details depend upon the capabilities of the device. Details might include <b>Media endpoint class</b> (such as Class 3 for communication devices such as IP phones), <b>MED Hardware revision</b> , <b>MED Firmware revision</b> , <b>MED Software revision</b> , <b>MED Serial number</b> , <b>MED Manufacturer name</b> , or <b>MED Model name</b> .                                                                                                                                                                                                                                                             |
| Organization Info   | One or more entries listing remote information by organizationally unique identifier ( <b>OUI</b> ), <b>Subtype</b> , <b>Index</b> , and <b>Info</b> (appears when the <b>interface</b> option is used).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Age                 | How long the neighbor has been identified (appears when the <b>interface</b> option is used and NetBIOS snooping is enabled on the switch).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Local Interface     | Name of the local physical interface (appears when the <b>interface</b> option is used and NetBIOS snooping is enabled on the switch).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Parent Interface    | Name of the aggregated Ethernet interface, if any, to which the interface belongs (appears when the <b>interface</b> option is used and NetBIOS snooping is enabled on the switch).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Chassis ID          | Chassis identifier of the chassis type listed (appears when the <b>interface</b> option is used and NetBIOS snooping is enabled on the switch).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Port description    | Port description (appears when the <b>interface</b> option is used and NetBIOS snooping is enabled on the switch).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| System name         | NetBIOS name of the host (appears when the <b>interface</b> option is used and NetBIOS snooping is enabled on the switch).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |



## Sample Output

### show lldp neighbors

```
user@switch> show lldp neighbors
```

| Local Interface | Parent Interface | Chassis Id        | Port info  | System Name |
|-----------------|------------------|-------------------|------------|-------------|
| xe-3/0/4.0      | ae31.0           | b0:c6:9a:63:80:40 | xe-0/0/0.0 | newyork31   |
| xe-3/0/5.0      | ae31.0           | b0:c6:9a:63:80:40 | xe-0/0/1.0 | newyork31   |
| xe-3/0/6.0      | ae31.0           | b0:c6:9a:63:80:40 | xe-0/0/2.0 | newyork31   |
| xe-3/0/7.0      | ae31.0           | b0:c6:9a:63:80:40 | xe-0/0/3.0 | newyork31   |
| xe-3/0/0.0      | ae31.0           | b0:c6:9a:63:80:40 | xe-0/1/0.0 | newyork31   |
| xe-3/0/1.0      | ae31.0           | b0:c6:9a:63:80:40 | xe-0/1/1.0 | newyork31   |
| xe-3/0/2.0      | ae31.0           | b0:c6:9a:63:80:40 | xe-0/1/2.0 | newyork31   |
| xe-3/0/3.0      | ae31.0           | b0:c6:9a:63:80:40 | xe-0/1/3.0 | newyork31   |

### show lldp neighbors interface

```
user@switch> show lldp neighbors interface ge-0/0/2
```

```
LLDP Neighbor Information:
Local Information:
Index: 1 Time to live: 240 Time mark: Wed Dec 1 10:23:24 2010 Age: 29 secs
Local Interface   : ge-0/0/2.0
Parent Interface  : -
Local Port ID     : 507
Ageout Count      : 0

Neighbour Information:
Chassis type      : Mac address
Chassis ID       : 00:1f:12:38:7f:c0
Port type        : Locally assigned
Port ID          : 507
Port description  : ge-0/0/2.0
System name      : bng-148p5-dev

System Description : Juniper Networks, Inc. ex4200-48p , version 10.4I0 Build
date: 2010-11-30 09:32:17 UTC

System capabilities
Supported  : Bridge Router
Enabled   : Bridge Router

Management Info
Type       : IPv4
Address    : 10.204.96.235
Port ID    : 34
Subtype    : 1
Interface Subtype : ifIndex(2)
OID        : 1.3.6.1.2.1.31.1.1.1.34
Media endpoint class: Network Connectivity

Organization Info
OUI        : 0.12.f
Subtype    : 1
Index      : 1
Info       : 22A8360000

Organization Info
OUI        : 0.12.f
Subtype    : 2
Index      : 2
```



Info : 030100



## show lldp statistics

|                                 |                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show lldp statistics</code><br><code>&lt;interface <i>interface-ids</i>&gt;</code>                                                                                            |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                     |
| <b>Description</b>              | Display LLDP statistics on all or selected interfaces.                                                                                                                              |
| <b>Options</b>                  | <p><b>none</b>—Display LLDP statistics on all interfaces and devices.</p> <p><b>interface <i>interface-ids</i></b>—(Optional) Display LLDP statistics on the selected devices.</p>  |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring LLDP on page 1214</a></li> <li>• <a href="#">Understanding LLDP on page 1186</a></li> </ul>                        |
| <b>List of Sample Output</b>    | <a href="#">show lldp statistics on page 1365</a>                                                                                                                                   |
| <b>Output Fields</b>            | <a href="#">Table 100 on page 1364</a> lists the output fields for the <b>show lldp statistics</b> command. Output fields are listed in the approximate order in which they appear. |

Table 100: show lldp statistics Output Fields

| Field Name            | Field Description                                                | Level of Output |
|-----------------------|------------------------------------------------------------------|-----------------|
| <b>Interface</b>      | Name of an interface.                                            | All levels      |
| <b>Received</b>       | Total number of LLDP frames received on an interface.            | All levels      |
| <b>Unknown-TLVs</b>   | Number of unrecognized LLDP TLVs received on an interface.       | All levels      |
| <b>With Errors</b>    | Number of LLDP frames received that contain errors.              | All levels      |
| <b>Discarded TLVs</b> | Number of LLDP TLVs received and then discarded on an interface. | All levels      |
| <b>Transmitted</b>    | Total number of LLDP frames transmitted on an interface.         | All levels      |
| <b>Untransmitted</b>  | Total number of LLDP frames not transmitted on an interface.     | All levels      |



## Sample Output

show lldp statistics

user@switch> show lldp statistics

| Interface  | Received | Unknown TLVs | With Errors | Discarded TLVs | Transmitted |
|------------|----------|--------------|-------------|----------------|-------------|
| me0.0      | 0        | 0            | 0           | 0              | 8003        |
| ge-0/0/0.0 | 8002     | 0            | 0           | 0              | 8003        |
| ge-0/0/1.0 | 8002     | 0            | 0           | 0              | 8003        |



## show route instance

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show route instance<br><brief   detail   summary><br><instance-name><br><operational>                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | (QFabric systems only) Display routing instance information.                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <p><b>none</b>—(Same as <b>brief</b>) Display standard information about all routing instances.</p> <p><b>brief   detail   summary</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b>. (These options are not available with the <b>operational</b> keyword.)</p> <p><b>instance-name</b>—(Optional) Display information for a specified routing instance.</p> <p><b>operational</b>—(Optional) Display operational routing instances.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>List of Sample Output</b>    | <a href="#">show route instance on page 1368</a><br><a href="#">show route instance detail on page 1368</a><br><a href="#">show route instance operational on page 1369</a><br><a href="#">show route instance summary on page 1369</a>                                                                                                                                                                                                                                                                                    |
| <b>Output Fields</b>            | Table 101 on page 1366 lists the output fields for the <b>show route instance</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                         |

Table 101: show route instance Output Fields

| Field Name                       | Field Description                                                              | Level of Output |
|----------------------------------|--------------------------------------------------------------------------------|-----------------|
| Instance or <i>instance-name</i> | Name of the routing instance.                                                  | All levels      |
| Operational Routing Instances    | ( <b>operational</b> keyword only) Names of all operational routing instances. | —               |
| Type                             | Type of routing instance: <b>forwarding</b> or <b>virtual-router</b> .         | All levels      |
| State                            | State of the routing instance: <b>active</b> or <b>inactive</b> .              | <b>detail</b>   |
| Interfaces                       | Name of interfaces belonging to this routing instance.                         | <b>detail</b>   |
| Tables                           | Tables (and number of routes) associated with this routing instance.           | <b>detail</b>   |
| Router ID                        | Identifier for the router.                                                     | <b>detail</b>   |



Table 101: show route instance Output Fields (*continued*)

| Field Name             | Field Description                               | Level of Output                  |
|------------------------|-------------------------------------------------|----------------------------------|
| Primary RIB            | Primary table for this routing instance.        | <b>brief</b> none <b>summary</b> |
| Active/holddown/hidden | Number of active, hold-down, and hidden routes. | All levels                       |



## Sample Output

```
show route instance      user@switch> show route instance
Instance                Type
      Primary RIB
master                  forwarding
      inet.0                        4/0/1

__juniper_private1__ forwarding
      __juniper_private1__.inet.0    1/0/3

__juniper_private2__ forwarding
      __juniper_private2__.inet.0    0/0/1

__juniper_private3__ forwarding
      __juniper_private3__.inet.0    1/0/2

__juniper_private4__ forwarding
      __juniper_private4__.inet.0    4/0/2

__master.anon__         forwarding

r1                       virtual-router

r2                       virtual-router
```

```
show route instance detail      user@switch> show route instance detail
master:
  Router ID: 3.3.3.7
  Type: forwarding              State: Active
  Tables:
    inet.0                      : 5 routes (4 active, 0 holddown, 1 hidden)

__juniper_private1__:
  Router ID: 0.0.0.0
  Type: forwarding              State: Active
  Interfaces:
    lo0.16385
    bme0.0
  Tables:
    __juniper_private1__.inet.0: 6 routes (1 active, 0 holddown, 3 hidden)

__juniper_private2__:
  Router ID: 0.0.0.0
  Type: forwarding              State: Active
  Interfaces:
    lo0.16384
  Tables:
    __juniper_private2__.inet.0: 1 routes (0 active, 0 holddown, 1 hidden)

__juniper_private3__:
  Router ID: 0.0.0.0
  Type: forwarding              State: Active
  Interfaces:
    bme0.1
  Tables:
    __juniper_private3__.inet.0: 4 routes (1 active, 0 holddown, 2 hidden)

__juniper_private4__:
```



```

Router ID: 0.0.0.0
Type: forwarding          State: Active
Interfaces:
  bme0.2
Tables:
  __juniper_private4__.inet.0: 8 routes (4 active, 0 holddown, 2 hidden)

__master.anon__:
Router ID: 0.0.0.0
Type: forwarding          State: Active

r1:
Router ID: 0.0.0.0
Type: virtual-router      State: Active
Interfaces:
  xe-0/0/0.0

r2:
Router ID: 0.0.0.0
Type: virtual-router      State: Active
Interfaces:
  xe-0/0/3.0

```

#### show route instance operational

```

user@switch> show route instance operational
Operational Routing Instances:

```

```

__juniper_private1__
__juniper_private2__
__juniper_private3__
__juniper_private4__
r1---qfabric
r2---qfabric
master

```

#### show route instance summary

```

user@switch> show route instance summary

```

| Instance                        | Type           | Active/holddown/hidden |
|---------------------------------|----------------|------------------------|
| Primary RIB                     |                |                        |
| master                          | forwarding     | 4/0/1                  |
| inet.0                          |                |                        |
| __juniper_private1__ forwarding |                |                        |
| __juniper_private1__.inet.0     |                | 1/0/3                  |
| __juniper_private2__ forwarding |                |                        |
| __juniper_private2__.inet.0     |                | 0/0/1                  |
| __juniper_private3__ forwarding |                |                        |
| __juniper_private3__.inet.0     |                | 1/0/2                  |
| __juniper_private4__ forwarding |                |                        |
| __juniper_private4__.inet.0     |                | 4/0/2                  |
| __master.anon__ forwarding      |                |                        |
| r1                              | virtual-router |                        |
| r2                              | virtual-router |                        |



## show snmp statistics

|                                 |                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show snmp statistics                                                                                                                                                                     |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Display statistics about Simple Network Management Protocol (SNMP) packets sent and received by the router or switch.                                                                    |
| <b>Options</b>                  | This command has no options.                                                                                                                                                             |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">clear snmp statistics on page 5741</a></li> </ul>                                                                                     |
| <b>List of Sample Output</b>    | <a href="#">show snmp statistics on page 1373</a>                                                                                                                                        |
| <b>Output Fields</b>            | <a href="#">Table 102 on page 1370</a> describes the output fields for the <b>show snmp statistics</b> command. Output fields are listed in the approximate order in which they appear.  |

Table 102: show snmp statistics Output Fields

| Field Name   | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Input</b> | <p>Information about received packets:</p> <ul style="list-style-type: none"> <li><b>Packets(snmplnPkts)</b>—Total number of messages delivered to the SNMP entity from the transport service.</li> <li><b>Bad versions—(snmplnBadVersions)</b> Total number of messages delivered to the SNMP entity that were for an unsupported SNMP version.</li> <li><b>Bad community names—(snmplnBadCommunityNames)</b> Total number of messages delivered to the SNMP entity that used an SNMP community name not known to the entity.</li> <li><b>Bad community uses—(snmplnBadCommunityUses)</b> Total number of messages delivered to the SNMP entity that represented an SNMP operation that was not allowed by the SNMP community named in the message.</li> <li><b>ASN parse errors—(snmplnASNParseErrs)</b> Total number of ASN.1 or BER errors encountered by the SNMP entity when decoding received SNMP messages.</li> <li><b>Too big—(snmplnTooBig)</b> Total number of SNMP PDUs delivered to the SNMP entity with an error status field of <b>tooBig</b>.</li> <li><b>No such names—(snmplnNoSuchNames)</b> Total number of SNMP PDUs delivered to the SNMP entity with an error status field of <b>noSuchName</b>.</li> <li><b>Bad values—(snmplnBadValues)</b> Total number of SNMP PDUs delivered to the SNMP entity with an error status field of <b>badValue</b>.</li> <li><b>Read only—(snmplnReadOnly)</b> Total number of valid SNMP PDUs delivered to the SNMP entity with an error status field of <b>readOnly</b>. Only incorrect implementations of SNMP generate this error.</li> </ul> |



Table 102: show snmp statistics Output Fields (*continued*)

| Field Name        | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input (continued) | <ul style="list-style-type: none"> <li>• <b>General errors—(snmpInGenErrs)</b> Total number of SNMP PDUs delivered to the SNMP entity with an error status field of <b>genErr</b>.</li> <li>• <b>Total requests varbinds—(snmpInTotalReqVars)</b> Total number of MIB objects retrieved successfully by the SNMP entity as a result of receiving valid SNMP <b>GetRequest</b> and <b>GetNext</b> PDUs.</li> <li>• <b>Total set varbinds—(snmpInSetVars)</b> Total number of MIB objects modified successfully by the SNMP entity as a result of receiving valid SNMP <b>SetRequest</b> PDUs.</li> <li>• <b>Get requests—(snmpInGetRequests)</b> Total number of SNMP <b>GetRequest</b> PDUs that have been accepted and processed by the SNMP entity.</li> <li>• <b>Get nexts—(snmpInGetNexts)</b> Total number of SNMP <b>GetNext</b> PDUs that have been accepted and processed by the SNMP entity.</li> <li>• <b>Set requests—(snmpInSetRequests)</b> Total number of SNMP <b>SetRequest</b> PDUs that have been accepted and processed by the SNMP entity.</li> <li>• <b>Get responses—(snmpInGetResponses)</b> Total number of SNMP <b>GetResponse</b> PDUs that have been accepted and processed by the SNMP entity.</li> <li>• <b>Traps—(snmpInTraps)</b> Total number of SNMP traps generated by the SNMP entity.</li> <li>• <b>Silent drops—(snmpSilentDrops)</b> Total number of <b>GetRequest</b>, <b>GetNextRequest</b>, <b>GetBulkRequest</b>, <b>SetRequests</b>, and <b>InformRequest</b> PDUs delivered to the SNMP entity that were silently dropped because the size of a reply containing an alternate response PDU with an empty variable-bindings field was greater than either a local constraint or the maximum message size associated with the originator of the requests.</li> <li>• <b>Proxy drops—(snmpProxyDrops)</b> Total number of <b>GetRequest</b>, <b>GetNextRequest</b>, <b>GetBulkRequest</b>, <b>SetRequests</b>, and <b>InformRequest</b> PDUs delivered to the SNMP entity that were silently dropped because the transmission of the message to a proxy target failed in such a way (other than a timeout) that no response PDU could be returned.</li> <li>• <b>Commit pending drops</b>—Number of SNMP packets for <b>Set</b> requests dropped because of a previous pending SNMP <b>Set</b> request on the committed configuration.</li> <li>• <b>Throttle drops</b>—Number of SNMP packets for any requests dropped reaching the throttle limit.</li> </ul> |



Table 102: show snmp statistics Output Fields (*continued*)

| Field Name | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| V3 Input   | <p>Information about SNMP version 3 packets:</p> <ul style="list-style-type: none"> <li>• <b>Unknown security models—(snmpUnknownSecurityModels)</b> Total number of packets received by the SNMP engine that were dropped because they referenced a security model that was not known to or supported by the SNMP engine.</li> <li>• <b>Invalid messages—(snmpInvalidMsgs)</b> Number of packets received by the SNMP engine that were dropped because there were invalid or inconsistent components in the SNMP message.</li> <li>• <b>Unknown pdu handlers—(snmpUnknownPDUHandlers)</b> Number of packets received by the SNMP engine that were dropped because the PDU contained in the packet could not be passed to an application responsible for handling the PDU type.</li> <li>• <b>Unavailable contexts—(snmpUnavailableContexts)</b> Number of requests received for a context that is known to the SNMP engine, but is currently unavailable.</li> <li>• <b>Unknown contexts—(snmpUnknownContexts)</b> Total number of requests received for a context that is unknown to the SNMP engine.</li> <li>• <b>Unsupported security levels—(usmStatsUnsupportedSecLevels)</b> Total number of packets received by the SNMP engine that were dropped because they requested a security level unknown to the SNMP engine (or otherwise unavailable).</li> <li>• <b>Not in time windows—(usmStatsNotInTimeWindows)</b> Total number of packets received by the SNMP engine that were dropped because they appeared outside the authoritative SNMP engine's window.</li> <li>• <b>Unknown user names—(usmStatsUnknownUserNames)</b> Total number of packets received by the SNMP engine that were dropped because they referenced a user that was not known to the SNMP engine.</li> <li>• <b>Unknown engine ids—(usmStatsUnknownEngineIDs)</b> Total number of packets received by the SNMP engine that were dropped because they referenced an SNMP engine ID that was not known to the SNMP engine.</li> <li>• <b>Wrong digests—(usmStatsWrongDigests)</b> Total number of packets received by the SNMP engine that were dropped because they did not contain the expected digest value.</li> <li>• <b>Decryption errors—(usmStatsDecryptionErrors)</b> Total number of packets received by the SNMP engine that were dropped because they could not be decrypted.</li> </ul> |



Table 102: show snmp statistics Output Fields (*continued*)

| Field Name    | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Output</b> | <p>Information about transmitted packets:</p> <ul style="list-style-type: none"> <li>• <b>Packets</b>—(<b>snmpOutPkts</b>) Total number of messages passed from the SNMP entity to the transport service.</li> <li>• <b>Too big</b>s—(<b>snmpOutTooBig</b>s) Total number of SNMP PDUs generated by the SNMP entity with an error status field of <b>tooBig</b>.</li> <li>• <b>No such names</b>—(<b>snmpOutNoSuchNames</b>) Total number of SNMP PDUs delivered to the SNMP entity with an error status field of <b>noSuchName</b>.</li> <li>• <b>Bad values</b>—(<b>snmpOutBadValues</b>) Total number of SNMP PDUs generated by the SNMP entity with an error status field of <b>badValue</b>.</li> <li>• <b>General errors</b>—(<b>snmpOutGenErr</b>s) Total number of SNMP PDUs generated by the SNMP entity with an error status field of <b>genErr</b>.</li> <li>• <b>Get requests</b>—(<b>snmpOutGetRequests</b>) Total number of SNMP <b>GetRequest</b> PDUs generated by the SNMP entity.</li> <li>• <b>Get next</b>s—(<b>snmpOutGetNext</b>s) Total number of SNMP <b>GetNext</b> PDUs generated by the SNMP entity.</li> <li>• <b>Set requests</b>—(<b>snmpOutSetRequests</b>) Total number of SNMP <b>SetRequest</b> PDUs generated by the SNMP entity.</li> <li>• <b>Get responses</b>—(<b>snmpOutGetResponses</b>) Total number of SNMP <b>GetResponse</b> PDUs generated by the SNMP entity.</li> <li>• <b>Traps</b>—(<b>snmpOutTraps</b>) Total number of SNMP traps generated by the SNMP entity.</li> </ul> |

## Sample Output

### show snmp statistics

```

user@host> show snmp statistics
SNMP statistics:
  Input:
    Packets: 246213, Bad versions: 12, Bad community names: 12,
    Bad community uses: 0, ASN parse errors: 96,
    Too big: 0, No such names: 0, Bad values: 0,
    Read only: 0, General errors: 0,
    Total request varbinds: 227084, Total set varbinds: 67,
    Get requests: 44942, Get nexts: 190371, Set requests: 10712,
    Get responses: 0, Traps: 0,
    Silent drops: 0, Proxy drops: 0, Commit pending drops: 0,
    Throttle drops: 0,
  V3 Input:
    Unknown security models: 0, Invalid messages: 0
    Unknown pdu handlers: 0, Unavailable contexts: 0
    Unknown contexts: 0, Unsupported security levels: 1
    Not in time windows: 0, Unknown user names: 0
    Unknown engine ids: 44, Wrong digests: 23, Decryption errors: 0
  Output:
    Packets: 246093, Too big: 0, No such names: 31561,
    Bad values: 0, General errors: 2,
    Get requests: 0, Get nexts: 0, Set requests: 0,
    Get responses: 246025, Traps: 0

```



## ssh

---

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | <code>ssh host</code><br><code>&lt;bypass-routing&gt;</code><br><code>&lt;inet   inet6&gt;</code><br><code>&lt;interface interface-name&gt;</code><br><code>&lt;logical-system logical-system-name&gt;</code><br><code>&lt;routing-instance routing-instance-name&gt;</code><br><code>&lt;source address&gt;</code><br><code>&lt;v1   v2&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | <code>ssh host</code><br><code>&lt;bypass-routing&gt;</code><br><code>&lt;inet   inet6&gt;</code><br><code>&lt;interface interface-name&gt;</code><br><code>&lt;routing-instance routing-instance-name&gt;</code><br><code>&lt;source address&gt;</code><br><code>&lt;v1   v2&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>                                  | Use the SSH program to open a connection between a local router or switch and a remote system and execute commands on the remote system. You can issue the <b>ssh</b> command from the Junos OS CLI to log in to a remote system or from a remote system to log in to the local router or switch. When executing this command, you include one or more CLI commands by enclosing them in quotation marks and separating the commands with semicolons:<br><br><pre>ssh address 'cli-command1 ; cli-command2 '</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                                      | <b>host</b> —Name or address of the remote system.<br><br><b>bypass-routing</b> —(Optional) Bypass the normal routing tables and send ping requests directly to a system on an attached network. If the system is not on a directly attached network, an error is returned. Use this option to ping a local system through an interface that has no route through it.<br><br><b>inet   inet6</b> —(Optional) Create an IPv4 or IPv6 connection, respectively.<br><br><b>interface interface-name</b> —(Optional) Interface name for the SSH session. (This option does not work when <b>default-address-selection</b> is configured at the <b>[edit system]</b> hierarchy level, because this configuration uses the loopback interface as the source address for all locally generated IP packets.)<br><br><b>logical-system logical-system-name</b> —(Optional) Name of a particular logical system for the SSH attempt.<br><br><b>routing-instance routing-instance-name</b> —(Optional) Name of the routing instance for the SSH attempt. |



**source address**—(Optional) Source address of the SSH connection.

**v1 | v2**—(Optional) Use SSH version 1 or 2, respectively, when connecting to a remote host.

**Additional Information** To configure an SSH (version 1) key for your user account, include the **authentication ssh-rsa** statement at the **[edit system login user *user-name*]** hierarchy level. To configure an SSH (version 2) key for your user account, include the **authentication dsa-rsa** statement at the **[edit system login user *user-name*]** hierarchy level. For details, see the .

You can limit the number of times a user can attempt to enter a password while logging in through SSH. To specify the number of times a user can attempt to enter a password to log in through SSH, include the **retry-options** statement at the **[edit system login]** hierarchy level. For details, see the .

**Required Privilege Level** network

**Related Documentation** • [Configuring SSH Host Keys for Secure Copying of Data on page 1227](#)

**List of Sample Output** [ssh on page 1375](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request.

## Sample Output

```
ssh
user@switch> ssh cree
Host key not found from the list of known hosts.
Are you sure you want to continue connecting (yes/no)? yes

Host ?cree' added to the list of known hosts.
boojun@cree's password:
Last login: Sun Jun 21 10:43:42 1998 from junos-router
% ...
```







## PART 6

# Ethernet Features

- [Overview on page 1379](#)
- [Configuration on page 1427](#)
- [Administration on page 1675](#)
- [Troubleshooting on page 1761](#)







## CHAPTER 15

# Overview

- [Software Features Overview on page 1379](#)
- [Bridging and VLANs on page 1384](#)
- [Spanning Trees Overview on page 1409](#)
- [Q-in-Q Tunneling on page 1416](#)
- [Layer 2 Protocol Tunneling on page 1419](#)
- [Proxy ARP on page 1423](#)

## Software Features Overview

---

- [Overview of Layer 2 Networking on page 1379](#)
- [Understanding Bridging on page 1381](#)
- [Understanding Unicast on page 1383](#)
- [Introduction to the Media Access Control \(MAC\) Layer 2 Sublayer on page 1383](#)
- [Understanding Layer 2 Broadcasting on page 1384](#)

## Overview of Layer 2 Networking

Layer 2, also known as the Data Link Layer, is the second level in the seven-layer OSI reference model for network protocol design. Layer 2 is equivalent to the link layer (the lowest layer) in the TCP/IP network model. Layer 2 is the network layer used to transfer data between adjacent network nodes in a wide area network or between nodes on the same local area network.

A *frame* is a protocol data unit, the smallest unit of bits on a Layer 2 network. Frames are transmitted to and received from devices on the same local area network (LAN). Unlike bits, frames have a defined structure and can be used for error detection, control plane activities and so forth. Not all frames carry user data. The network uses some frames to control the data link itself..

At Layer 2, *unicast* refers to sending frames from one node to a single other node, whereas *multicast* denotes sending traffic from one node to multiple nodes, and *broadcasting* refers to the transmission of frames to all nodes in a network. A *broadcast domain* is a logical division of a network in which all nodes of that network can be reached at Layer 2 by a broadcast.



Segments of a LAN can be linked at the frame level using *bridges*. Bridging creates separate broadcast domains on the LAN, creating VLANs, which are independent logical networks that group together related devices into separate network segments. The grouping of devices on a VLAN is independent of where the devices are physically located in the LAN. Without bridging and VLANs, all devices on the Ethernet LAN are in a single broadcast domain, and all the devices detect all the packets on the LAN.

*Forwarding* is the relaying of packets from one network segment to another by nodes in the network. On a VLAN, a frame whose origin and destination are in the same VLAN are forwarded only within the local VLAN. A network segment is a portion of a computer network wherein every device communicates using the same physical layer.

Layer 2 contains two sublayers:

- Logical link control (LLC) sublayer, which is responsible for managing communications links and handling frame traffic.
- Media access control (MAC) sublayer, which governs protocol access to the physical network medium. By using the MAC addresses that are assigned to all ports on a switch, multiple devices on the same physical link can uniquely identify one another.

The ports, or interfaces, on a switch operate in either access mode, tagged-access, or trunk mode:

- *Access mode* ports connect to a network device such as a desktop computer, an IP telephone, a printer, a file server, or a security camera. The port itself belongs to a single VLAN. The frames transmitted over an access interface are normal Ethernet frames. By default, all ports on a switch are in access mode.
- *Tagged-Access mode* ports connect to a network device such as a desktop computer, an IP telephone, a printer, a file server, or a security camera. The port itself belongs to a single VLAN. The frames transmitted over an access interface are normal Ethernet frames. By default, all ports on a switch are in access mode. Tagged-access mode accommodates cloud computing, specifically scenarios including virtual machines or virtual computers. Because several virtual computers can be included on one physical server, the packets generated by one server can contain an aggregation of VLAN packets from different virtual machines on that server. To accommodate this situation, tagged-access mode reflects packets back to the physical server on the same downstream port when the destination address of the packet was learned on that downstream port. Packets are also reflected back to the physical server on the downstream port when the destination has not yet been learned. Therefore, the third interface mode, tagged access, has some characteristics of access mode and some characteristics of trunk mode:
- *Trunk mode* ports handle traffic for multiple VLANs, multiplexing the traffic for all those VLANs over the same physical connection. Trunk interfaces are generally used to interconnect switches to other devices or switches.

With native VLAN configured, frames that do not carry VLAN tags are sent over the trunk interface. If you have a situation where packets pass from a device to a switch in access mode, and you want to then send those packets from the switch over a trunk port, use native VLAN mode. Configure the single VLAN on the switch's port (which is in access mode) as a native VLAN. The switch's trunk port will then treat



those frames differently than the other tagged packets. For example, if a trunk port has three VLANs, 10, 20, and 30, assigned to it with VLAN 10 being the native VLAN, frames on VLAN 10 that leave the trunk port on the other end have no 802.1Q header (tag). There is another native VLAN option. You can have the switch add and remove tags for untagged packets. To do this, you first configure the single VLAN as a native VLAN on a port attached to a device on the edge. Then, assign a VLAN ID tag to the single native VLAN on the port connected to a device. Last, add the VLAN ID to the trunk port. Now, when the switch receives the untagged packet, it adds the ID you specified and sends and receives the tagged packets on the trunk port configured to accept that VLAN.

Including the sublayers, Layer 2 on the QFX Series supports the following functionality:

- Unicast, multicast, and broadcast traffic.
- Bridging.
- VLAN 802.1Q—Also known as *VLAN tagging*, this protocol allows multiple bridged networks to transparently share the same physical network link by adding VLAN tags to an Ethernet frame.
- Extension of Layer 2 VLANs across multiple switches using Spanning Tree Protocol (STP) prevents looping across the network.
- *MAC learning*, including per-VLAN MAC learning and Layer 2 learning suppression—This process obtains the MAC addresses of all the nodes on a network
- Link aggregation—This process groups of Ethernet interfaces at the physical layer to form a single link layer interface, also known as a *link aggregation group (LAG)* or LAG bundle
- Storm control on the physical port for unicast, multicast, and broadcast
- STP support, including 802.1d, RSTP, MSTP, and Root Guard

**Related  
Documentation**

- [Understanding VLANs on page 1385](#)
- [Understanding Bridging on page 1381](#)

## Understanding Bridging

*Bridging* is a frame-forwarding technique used in Layer 2. With bridging, there are no assumptions about where a particular address is located in a network, so a mixed collection of interface types and speeds can be logically grouped together.

Layer 2 on a switch uses the *transparent bridging* protocol. This protocol enables a node to learn information about all the nodes on the LAN, including nodes on all the different VLANs. This information is used to create address-lookup tables, called *Ethernet switching tables*. The switch uses these tables when forwarding traffic to or toward a destination on the LAN.

Transparent bridging uses five mechanisms to create and maintain Ethernet switching tables on the node:



- *Learning* is the process used to obtain the MAC addresses of all the nodes on a network. When a node is first connected to an Ethernet LAN or VLAN, it has no information about other nodes on the network. To learn MAC addresses, a node reads all detected packets on the LAN or on the local VLAN, looking for the MAC addresses of sending nodes. These addresses are added to the Ethernet switching table, along with the interface (or port) on which the traffic was received and the time when the address was learned.
- *Forwarding* describes how traffic passes from an incoming to an outgoing interface that leads to or toward the destination. To forward frames, the Ethernet switching table is read to determine if the table contains the MAC address corresponding to the frame destination. If the Ethernet switching table contains an entry for the desired destination address, the traffic is sent out to the interface associated with the MAC address. The Ethernet switching table is read in the same way when frames are transmitted that originate on nodes connected directly to the initiating node.
- *Flooding* is the mechanism by which a node learns about destinations not in its Ethernet switching table. If the table has no entry for a particular destination MAC address, traffic floods out to all interfaces except the interface on which it was received. (If traffic originates on the node, the device floods it out all interfaces.) When the destination node receives the flooded traffic, it returns an acknowledgment packet, allowing the node to learn the MAC address and add it to its Ethernet switching table.
- *Filtering* refers to the limiting of traffic to the local VLAN whenever possible. As the number of entries in the Ethernet switching table grows, an increasingly complete picture of the VLAN and the larger LAN is built, showing which nodes are in the local VLAN and which are on other network segments. This information is used to filter traffic. Specifically, for traffic whose source and destination MAC addresses are in the local VLAN, filtering prevents traffic forwarding to other network segments.
- *Aging* keeps the entries in the Ethernet switching table current. For each MAC address in the table, a timestamp shows when the information about the network node was learned. Each time traffic from a MAC address is detected, the timestamp is updated. A timer on the node periodically checks the timestamp, and if it is older than a user-configured value, that MAC address is removed from the Ethernet switching table. This aging process ensures that the device tracks only active nodes on the network and that it is able to flush out network nodes that are no longer available.

**Related  
Documentation**

- [Introduction to the Media Access Control \(MAC\) Layer 2 Sublayer on page 1383](#)
- [Understanding MAC Learning on page 1388](#)
- [Understanding VLANs on page 1385](#)
- [Example: Setting Up Basic Bridging and a VLAN on the QFX Series on page 1467](#)
- [Example: Setting Up Bridging with Multiple VLANs on page 1476](#)



## Understanding Unicast

*Unicasting* is the act of sending data from one node of the network to another. In contrast, multicast transmissions send traffic from one data node to multiple other data nodes.

*Unknown unicast* traffic consists of unicast frames with unknown destination MAC addresses. By default, the switch floods these unicast frames that are traveling in a VLAN to all interfaces that are members of the VLAN. Forwarding this type of traffic to interfaces on the switch can trigger a security issue. The LAN is suddenly flooded with packets, creating unnecessary traffic that leads to poor network performance or even a complete loss of network service. This is known as a traffic storm.

To prevent a storm, you can disable the flooding of unknown unicast packets to all interfaces by configuring one VLAN or all VLANs to forward any unknown unicast traffic to a specific trunk interface. (This channels the unknown unicast traffic to a single interface.)

### Related Documentation

- [Overview of Layer 2 Networking on page 1379](#)
- [Understanding VLANs on page 1385](#)

## Introduction to the Media Access Control (MAC) Layer 2 Sublayer

This topic provides an introduction to the MAC sublayer of the data link layer (Layer 2).

In Layer 2 of a network, the Media Access Control (MAC) sublayer provides addressing and channel access control mechanisms that enable several terminals or network nodes to communicate in a network.

The MAC sublayer acts as an interface between the logical link control (LLC) Ethernet sublayer and Layer 1 (the physical layer). The MAC sublayer emulates a full-duplex logical communication channel in a multipoint network. This channel may provide unicast, multicast, or broadcast communication service. The MAC sublayer uses MAC protocols to prevent collisions.

In Layer 2, multiple devices on the same physical link can uniquely identify one another at the data link layer, by using the MAC addresses that are assigned to all ports on a switch. A MAC algorithm accepts as input a secret key and an arbitrary-length message to be authenticated, and outputs a MAC address.

A MAC address is a 12-digit hexadecimal number (48 bits in long). MAC addresses are usually written in one of these formats:

- MM:MM:MM:SS:SS:SS
- MM-MM-MM-SS-SS-SS

The first half of a MAC address contains the ID number of the adapter manufacturer. These IDs are regulated by an Internet standards body. The second half of a MAC address represents the serial number assigned to the adapter by the manufacturer.



Contrast MAC addressing, which works at Layer 2, with IP addressing, which runs at Layer 3 (networking and routing). One way to remember the difference is that the MAC addresses apply to a physical or virtual node, whereas IP addresses apply to the software implementation of that node. MAC addresses are typically fixed on a per-node basis, whereas IP addresses change when the node moves from one part of the network to another.

IP networks maintain a mapping between the IP and MAC addresses of a node using the Address Resolution Protocol (ARP) table. DHCP also typically uses MAC addresses when assigning IP addresses to nodes.

- Related Documentation**
- [Overview of Layer 2 Networking on page 1379](#)
  - [Understanding MAC Learning on page 1388](#)

## Understanding Layer 2 Broadcasting

In a Layer 2 network, *broadcasting* refers to sending traffic to all nodes on a network.

Layer 2 broadcast traffic stays within a local area network (LAN) boundary; known as the *broadcast domain*. Broadcasting can be compared to unicasting (sending traffic to a single node) or multicasting (delivering traffic to a group of nodes simultaneously).



**NOTE:** In Layer 2, the MAC address for broadcasting is FF:FF:FF:FF:FF:FF.

Excessive broadcast traffic can sometimes create a broadcast storm. A broadcast storm occurs when messages are broadcast on a network and each message prompts a receiving node to respond by broadcasting its own messages on the network. This, in turn, prompts further responses that create a snowball effect. The LAN is suddenly flooded with packets, creating unnecessary traffic that leads to poor network performance or even a complete loss of network service.

Broadcasting is used for a number of purposes in the data link layer, one of the primary ones being the manner in which VLANs utilize broadcast domains.

- Related Documentation**
- [Overview of Layer 2 Networking on page 1379](#)
  - [Understanding Storm Control on page 4125](#)
  - [Understanding Bridging on page 1381](#)
  - [Understanding VLANs on page 1385](#)

## Bridging and VLANs

---

- [Understanding VLANs on page 1385](#)
- [Understanding Routed VLAN Interfaces on page 1386](#)
- [Understanding MAC Learning on page 1388](#)
- [Understanding Reflective Relay for Use with VEPA Technology on page 1388](#)



- [Understanding Private VLANs on page 1389](#)
- [Understanding PVLAN Traffic Flows Across Multiple Switches on page 1395](#)
- [Understanding Secondary VLAN Trunk Ports and Promiscuous Access Ports on PVLANS on page 1399](#)
- [Understanding Egress Firewall Filters with PVLANS on page 1408](#)

## Understanding VLANs

A virtual local area network (virtual LAN, or *VLAN*) is a collection of network nodes that are grouped together to form separate *broadcast domains*.

- [Introduction to VLANs on page 1385](#)
- [VLAN Tagging on page 1386](#)
- [Assigning Traffic to a VLAN on page 1386](#)
- [Ethernet Switching Tables on page 1386](#)
- [Layer 2 and Layer 3 Forwarding of VLAN Traffic on page 1386](#)

### Introduction to VLANs

On an Ethernet network that is a single LAN, all traffic is forwarded to all nodes on the LAN. A VLAN has the same attributes as a physical LAN, but allows end stations to be grouped together. An advantage to a VLAN is that you can perform network reconfiguration through the software rather than having to physically relocate a device.

On VLANs, frames whose origin and destination are in the same VLAN are forwarded only within the local VLAN. Frames that are not destined for the local VLAN are the only ones forwarded to other broadcast domains. VLANs limit the amount of traffic flowing across the entire LAN, reducing the number of possible collisions and packet retransmissions within a VLAN and on the LAN as a whole.

On an Ethernet LAN, all network nodes must be physically connected to the same network. On VLANs, the physical location of the nodes is not important, so you can group network nodes in any way that makes sense for your organization, such as by department or business function, types of network nodes, or even physical location. Each VLAN is identified by a single IP subnetwork and by standardized IEEE 802.1Q encapsulation.

In networks that use Fibre Channel over Ethernet (FCoE), a VLAN that uses FCoE frames must be dedicated to FCoE traffic only; you cannot mix standard Ethernet and FCoE traffic on the same VLAN.

QFX Series systems support a maximum of 4089 VLANs, which includes the default VLAN. You can assign a VLAN ID in the range of 1 to 4094.



**NOTE:** You cannot mix Fibre Channel and Ethernet ports on the same VLAN. For further information about VLANs and Fibre Channel, see “[Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric](#)” on page 4495.



## VLAN Tagging

---

When you divide an Ethernet LAN into multiple VLANs, each VLAN is assigned a unique IEEE 802.1Q tag. This tag is associated with each frame in the VLAN, and the network nodes receiving the traffic can use the tag to identify which VLAN a frame is associated with. For a simple network that has only a single VLAN, all traffic has the same 802.1Q tag.

## Assigning Traffic to a VLAN

---

You can assign traffic to a VLAN in one of the following ways:

- *Interface (port)*—You can specify that all traffic received on a particular interface is assigned to a specific VLAN. By default, all traffic received on an access interface is untagged. This traffic is part of a default VLAN, but does not have an 802.1Q tag. During configuration, you specify which VLAN to assign the traffic to. You configure the VLAN either by using a VLAN ID number or by using a name, which is translated into a numeric VLAN ID.
- *MAC address*—You can specify that all traffic received from a specific MAC address be forwarded to a specific egress port (the next hop port). This method is cumbersome to configure manually, but it can be useful when you are using automated databases to manage the devices on your network.

## Ethernet Switching Tables

---

Learned MAC addresses on local VLANs are stored in a “bridge” on page 1381. With each MAC address, the Ethernet switching table stores and associates the name of the learned port address. The information in this table is used when packets are forwarded toward their destination.

## Layer 2 and Layer 3 Forwarding of VLAN Traffic

---

To pass traffic within a VLAN, Layer 2 forwarding protocols are used, including IEEE 802.1Q and Spanning Tree Protocol (STP),

To pass traffic between two VLANs, standard Layer 3 routing protocols are used, such as static routing. On the QFX Series, the same interfaces that support Layer 2 bridging protocols also support Layer 3 routing protocols, providing multilayer switching.

### Related Documentation

- [Example: Setting Up Basic Bridging and a VLAN on the QFX Series on page 1467](#)
- [Example: Setting Up Bridging with Multiple VLANs on page 1476](#)
- [Understanding FCoE on page 4392](#)
- [Interfaces Overview on page 1911](#)

## Understanding Routed VLAN Interfaces

To segment traffic on a LAN into separate broadcast domains, you create separate virtual LANs (VLANs). VLANs limit the amount of traffic flowing across the entire LAN, reducing



the possible number of collisions and packet retransmissions within the LAN. For example, you might want to create a VLAN that includes the employees in a department and the resources that they use often, such as printers, servers, and so on.

Of course, you also want to allow these employees to communicate with people and resources in other VLANs. To forward packets between VLANs, you normally need a router that connects the VLANs. However, you can accomplish this forwarding on a switch without using a router by configuring a routed VLAN interface (RVI). Using this approach reduces complexity and avoids the costs associated with purchasing, installing, managing, powering, and cooling another device.

An RVI is a special type of Layer 3 virtual interface named **vlan**. Like normal Layer 3 interfaces, the **vlan** interface needs a logical unit number with an IP address. In fact, to be useful an RVI needs at least two logical units and two IP addresses—you must create units with addresses in each of the subnets associated with the VLANs between which you want traffic to be routed. That is, if you have two VLANs (for example, VLAN **red** and VLAN **blue**) with corresponding subnets, your RVI must have a logical unit with an address in the subnet for **red** and a logical unit with an address in the subnet for **blue**. The switch automatically creates direct routes to these subnets and uses these routes to forward traffic between VLANs. [Table 103 on page 1387](#) shows values you might use when configuring an RVI:

**Table 103: Sample RVI Values**

| Property                      | Settings                                                                                                                                        |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| VLAN names and tags (IDs)     | <b>blue</b> , ID 100<br><b>red</b> , ID 200                                                                                                     |
| Subnets associated with VLANs | <b>blue</b> : 192.0.2.0/25 (addresses 192.0.2.1 through 192.0.2.126)<br><b>red</b> : 192.0.2.128/25 (addresses 192.0.2.129 through 192.0.2.254) |
| RVI name                      | interface <b>vlan</b>                                                                                                                           |
| RVI units and addresses       | logical unit 100: 192.0.2.1/25<br>logical unit 200: 192.0.2.129/25                                                                              |

For the sake of consistency and to avoid confusion, [Table 103 on page 1387](#) shows RVI logical unit numbers that match the IDs of the corresponding VLANs. However, you do not have to assign logical unit numbers that match the VLAN IDs—you can use any values for the units. To bind the logical units of the RVI to the appropriate VLANs, you use the **l3-interface** statement.

Because RVIs operate at Layer 3, you can use Layer 3 services such as firewall filters or CoS rewriting with them. RVIs are similar to integrated routing and bridging (IRB) interfaces supported on Juniper routers and switch virtual interfaces (SVIs) and bridge-group virtual interfaces (BVI) supported on other vendors' devices.

[Table 104 on page 1388](#) shows the number of RVIs that each QFX platform supports.



Table 104: Number of Supported RVIs by Platform

| Platform  | Number of Supported RVIs |
|-----------|--------------------------|
| QFX3500   | 1200                     |
| QFX3000-G | 2000                     |
| QFX3000-M | 2000                     |

**Related Documentation** • [Example: Configuring Routing Between VLANs on One Switch on page 1481](#)

## Understanding MAC Learning

*MAC learning* is the process of obtaining the MAC addresses of all the nodes on a network.

When a node is first connected to an Ethernet LAN or VLAN, it has no information about the other nodes on the network. As data is sent through the network, data packets include a data frame listing their source and destination MAC addresses. The data frame is forwarded to a target port, which is connected to the second device. The MAC address is learned locally at the target port, which facilitates communications for frames that later enter the target port and contain addresses previously learned from a received frame.

MAC learning can also be enabled on a per-VLAN basis. See [“Example: Disabling MAC Learning in a VLAN” on page 1508](#) for further information.

By default, MAC learning is enabled on the QFX Series.

**Related Documentation** • [Introduction to the Media Access Control \(MAC\) Layer 2 Sublayer on page 1383](#)  
• [Overview of Layer 2 Networking on page 1379](#)

## Understanding Reflective Relay for Use with VEPA Technology

Virtual Ethernet Port Aggregator (VEPA) technology aggregates packets generated by virtual machines located on the same server and relays them to a physical switch. The physical switch then provides connectivity between the virtual machines located on the server, so the virtual machines do not communicate with one another. Offloading switching activities from a virtual switch to a physical switch reduces the computing overhead on the virtual servers and takes advantage of the security, filtering, and management features of the physical switch. Reflective relay, also known as “hairpin turn,” enables the physical switch to receive aggregated packets from the virtual machines hosted on the server through the VEPA on the downstream port and send those packets out the same downstream port from which the physical switch received them.

- [VEPA on page 1389](#)
- [Reflective Relay on page 1389](#)



## VEPA

Even though virtual machines are capable of sending packets directly to one another, it is more efficient to pass these aggregated packets from the VEPA to a physical switch. The switch can then send any packets destined for a virtual machine located on the same server to the VEPA.

## Reflective Relay

Reflective relay, also known as a “hairpin turn” or “hairpin mode,” returns aggregated packets to the VEPA by using the same downstream port that initially delivered the aggregated packets from the VEPA to the switch. Reflective relay must be configured on the interface located on the physical switch that receives aggregated packets, such as VEPA packets, because some of these packets might need to be sent back to the server if they are destined for another virtual machine on the same server.

Reflective relay only occurs in two situations:

- When the destination address of the packet was learned on that downstream port
- When the destination has not yet been learned

Reflective relay does not otherwise change the operation of the switch. If the interface to which the virtual machine is connected and the MAC address of the virtual machine packet are not yet included in the Ethernet switching table for the virtual machine's associated VLAN, an entry is added. If the source MAC address of an incoming packet under the respective VLAN is not yet present in the Ethernet switching table, the switch floods the packet on all the other ports that are members of the same VLAN, including the port on which the packet arrived.

### Related Documentation

- [Understanding Bridging on page 1381](#)
- [Understanding VLANs on page 1385](#)
- [Example: Configuring Reflective Relay for Use with VEPA Technology on page 1462](#)

## Understanding Private VLANs

VLANs limit broadcasts to specified users. Private VLANs (PVLANS) take this concept a step further by splitting the broadcast domain into multiple isolated broadcast subdomains and essentially putting secondary VLANs inside a primary VLAN. PVLANS restrict traffic flows through their member switch ports (called “private ports”) so that these ports communicate only with a specified uplink trunk port or with specified ports within the same VLAN. The uplink trunk port is usually connected to a router, firewall, server, or provider network. Each PVLAN typically contains many private ports that communicate only with a single uplink, thereby preventing the ports from communicating with each other.

Just like regular VLANs, PVLANS are isolated on Layer 2 and require that a Layer 3 device be used to route traffic among them. PVLANS are useful for restricting the flow of broadcast and unknown unicast traffic and for limiting the communication between



known hosts. Service providers use PVLANS to keep their customers isolated from one another.

This topic explains the following concepts regarding PVLANS on the QFX Series:

- [Typical Structure and Primary Application of PVLANS on page 1390](#)
- [Using 802.1Q Tags to Identify Packets on page 1392](#)
- [Efficient Use of IP Addresses on page 1393](#)
- [PVLAN Port Types on page 1393](#)
- [Limitations of Private VLANs on page 1395](#)


### **[Typical Structure and Primary Application of PVLANS](#)**

---

A PVLAN can be created on a single switch or can be configured to span multiple switches. The PVLAN shown in [Figure 18 on page 1391](#) includes two switches, with a primary PVLAN domain and various subdomains.



Figure 18: Subdomains in a PVLAN

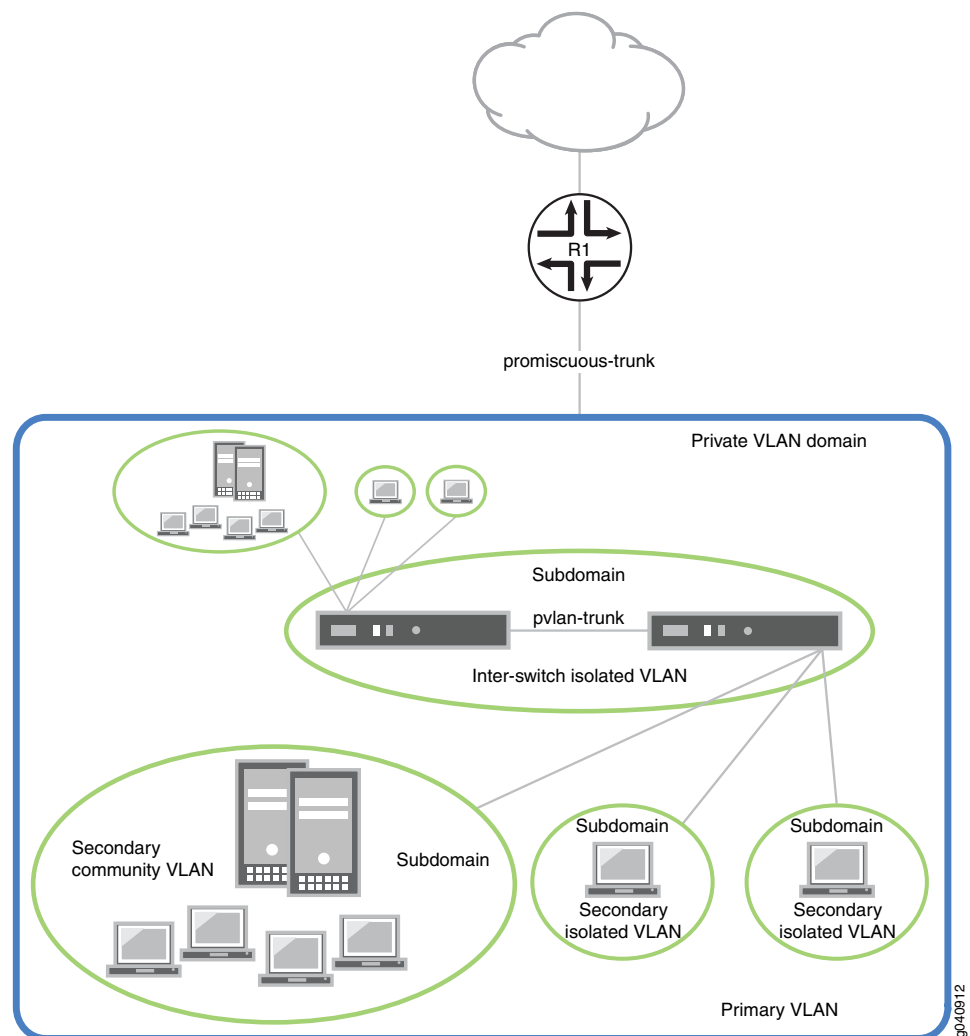

As shown in [Figure 18 on page 1391](#), a PVLAN has only one primary domain and multiple secondary domains. The types of domains are:

- Primary VLAN—VLAN used to forward frames downstream to isolated and community VLANs.
- Secondary isolated VLAN—VLAN that receives packets only from the primary VLAN and forwards frames upstream to the primary VLAN.
- Secondary interswitch isolated VLAN—VLAN used to forward isolated VLAN traffic from one switch to another through PVLAN trunk ports. 802.1Q tags are required for interswitch isolated VLANs because IEEE 802.1Q uses an internal tagging mechanism




by which a trunking device inserts a 4-byte VLAN frame identification tab into the packet header.

- Secondary community VLAN—VLAN used to transport frames among members of a community (a subset of users within the VLAN) and to forward frames upstream to the primary VLAN.

Figure 19 on page 1392 shows a PVLAN spanning multiple switches, where the primary VLAN (100) contains two community domains (300 and 400) and one interswitch isolated domain.

Figure 19: PVLAN Spanning Multiple Switches

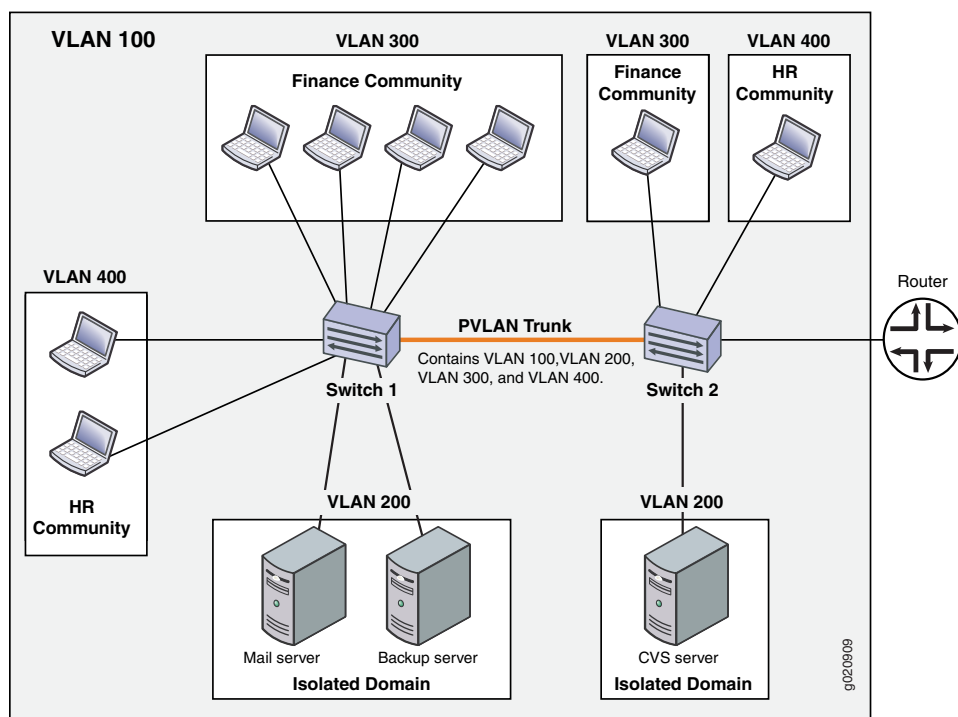

**NOTE:** Primary and secondary VLANs count against the limit of 4089 VLANs supported on the QFX Series. For example, each VLAN in Figure 19 on page 1392 counts against this limit.

### Using 802.1Q Tags to Identify Packets

When packets are marked with a customer-specific 802.1Q tag, that tag identifies ownership of the packets for any switch or router in the network. Sometimes, 802.1Q tags are needed within PVLANS to keep track of packets from different subdomains. Table 105 on page 1393 indicates when a VLAN 802.1Q tag is needed on the primary VLAN or on secondary VLANs.



Table 105: PVLAN Requirements for 802.1Q Tags

|                | On a Single Switch                          | On Multiple Switches                                                                                                                                                                                                               |
|----------------|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Primary VLAN   | Specify an 802.1Q tag by setting a VLAN ID. | Specify an 802.1Q tag by setting a VLAN ID.                                                                                                                                                                                        |
| Secondary VLAN | No tag needed on VLANs.                     | VLANs need 802.1Q tags: <ul style="list-style-type: none"> <li>Specify an 802.1Q tag for each community VLAN by setting a VLAN ID.</li> <li>Specify the 802.1Q tag for an isolation VLAN ID by setting an isolation ID.</li> </ul> |

### Efficient Use of IP Addresses

PVLANS provide IP address conservation and efficient allocation of IP addresses. In a typical network, VLANs usually correspond to a single IP subnet. In PVLANS, the hosts in all secondary VLANs belong to the same IP subnet because the subnet is allocated to the primary VLAN. Hosts within the secondary VLAN are assigned IP addresses based on IP subnets associated with the primary VLAN, and their IP subnet masking information reflects that of the primary VLAN subnet. However, each secondary VLAN is a separate broadcast domain.

### PVLAN Port Types

PVLANS can use six different port types. The network depicted in [Figure 19 on page 1392](#) uses a promiscuous port to transport information to the router, community ports to connect the finance and HR communities to their respective switches, isolated ports to connect the servers, and a PVLAN trunk port to connect the two switches. PVLAN ports have different restrictions:

- Promiscuous trunk port—A promiscuous port is an upstream trunk port connected to a router, firewall, server, or provider network. A promiscuous trunk port can communicate with all interfaces, including the isolated and community ports within a PVLAN.
- PVLAN trunk port—A PVLAN trunk port is required in multiswitch PVLAN configurations to span the switches. The PVLAN trunk port is a member of all VLANs within the PVLAN (that is, the primary VLAN, the community VLANs, and the interswitch isolated VLAN), and it carries traffic from the primary VLAN and all secondary VLANs. It can communicate with all ports.

Communication between a PVLAN trunk port and an isolated port is usually unidirectional. A PVLAN trunk port's membership in the interswitch isolated VLAN is egress-only, meaning that an isolated port can forward packets to a PVLAN trunk port, but a PVLAN trunk port does not forward packets to an isolated port (unless the packets ingressed on a promiscuous access port and are therefore being forwarded to all the secondary VLANs in the same primary VLAN as the promiscuous port).

- Secondary VLAN trunk port (not shown)—Secondary trunk ports carry secondary VLAN traffic. For a given private VLAN, a secondary VLAN trunk port can carry traffic for only one secondary VLAN. However, a secondary VLAN trunk port can carry traffic for multiple secondary VLANs as long as each secondary VLAN is a member of a different



primary VLAN. For example, a secondary VLAN trunk port can carry traffic for a community VLAN that is part of primary VLAN pvlan100 and also carry traffic for an isolated VLAN that is part of primary VLAN pvlan400.

- **Community port**—Community ports communicate among themselves and with their promiscuous ports. Community ports serve only a select group of users. These interfaces are separated at Layer 2 from all other interfaces in other communities or isolated ports within their PVLAN.
- **Isolated access port**—Isolated ports have Layer 2 connectivity only with promiscuous ports and PVLAN trunk ports—an isolated port cannot communicate with another isolated port even if these two ports are members of the same isolated VLAN (or interswitch isolated VLAN) domain. Typically, a server, such as a mail server or a backup server, is connected on an isolated port. In a hotel, each room would typically be connected on an isolated port, meaning that room-to-room communication is not possible, but each room can access the Internet on the promiscuous port.
- **Promiscuous access port (not shown)**—These ports carry untagged traffic. Traffic that ingresses on a promiscuous access port is forwarded to all secondary VLAN ports on the device. If traffic ingresses into the device on a VLAN-enabled port and egresses on a promiscuous access port, the traffic is untagged on egress. If tagged traffic ingresses on a promiscuous access port, the traffic is discarded.

Table 106 on page 1394 summarizes whether Layer 2 connectivity exists between the different types of ports.

**Table 106: PVLAN Ports and Layer 2 Connectivity**

| Port Type          | Promiscuous Trunk | PVLAN Trunk             | Secondary Trunk | Community               | Isolated Access | Promiscuous access |
|--------------------|-------------------|-------------------------|-----------------|-------------------------|-----------------|--------------------|
| Promiscuous trunk  | Yes               | Yes                     | Yes             | Yes                     | Yes             | Yes                |
| PVLAN trunk        | Yes               | Yes                     | Yes             | Yes—same community only | Yes             | Yes                |
| Secondary Trunk    | Yes               | Yes                     | No              | Yes                     | No              | Yes                |
| Community          | Yes               | Yes                     | Yes             | Yes—same community only | No              | Yes                |
| Isolated access    | Yes               | Yes—unidirectional only | No              | No                      | No              | Yes                |
| Promiscuous access | Yes               | Yes                     | Yes             | Yes                     | Yes             | No                 |



**NOTE:** If you enable the `no-mac-learning` statement on a primary VLAN, all isolated VLANs in the PVLAN inherit that setting. However, if you want to disable MAC address learning on any community VLANs, you must configure the `no-mac-learning` statement on each of those VLANs.



### Limitations of Private VLANs

---

The following constraints apply to private VLAN configurations:

- IGMP snooping is not supported with private VLANs.
- Routed VLAN interfaces are not supported on private VLANs
- Routing between secondary VLANs in the same primary VLAN is not supported.

#### Related Documentation

- [Understanding Secondary VLAN Trunk Ports and Promiscuous Access Ports on PVLANS on page 1399](#)
- [Creating a Private VLAN on a Single Switch on page 1560](#)
- [Creating a Private VLAN Spanning Multiple Switches on page 1561](#)

### Understanding PVLAN Traffic Flows Across Multiple Switches

This topic illustrates and explains three different traffic flows on a sample multiswitch network configured with a private VLAN (PVLAN). PVLANS restrict traffic flows through their member switch ports (which are called “private ports”) so that they communicate only with a specific uplink trunk port or with specified ports within the same VLAN.

This topic describes:

- [Community VLAN Sending Untagged Traffic on page 1395](#)
- [Isolated VLAN Sending Untagged Traffic on page 1396](#)
- [PVLAN Tagged Traffic Sent on a Promiscuous Port on page 1397](#)


#### Community VLAN Sending Untagged Traffic

---

In this scenario, a VLAN in Community-1 of Switch 1 at interface ge-0/0/0 sends untagged traffic. The arrows in [Figure 20 on page 1396](#) represent this traffic flow.



Figure 20: Community VLAN Sends Untagged Traffic

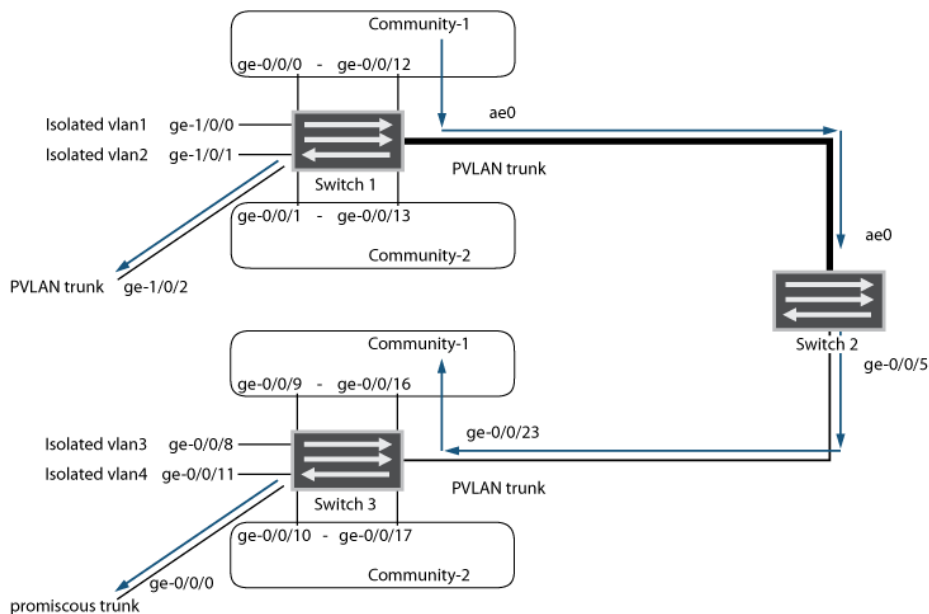

In this scenario, the following activity takes place on Switch 1:

- Community-1 VLAN on interface ge-0/0/0: Learning
- pvlan100 on interface ge-0/0/0: Replication
- Community-1 VLAN on interface ge-0/0/12: Receives traffic
- PVLAN trunk port: Traffic exits from ge-1/0/2 and from ae0 with tag 10
- Community-2: Interface receives no traffic
- Isolated VLANs: Interfaces receive no traffic

In this scenario, this activity takes place on Switch 3:


- Community-1 VLAN on interface ge-0/0/23 (PVLAN trunk): Learning
- pvlan100 on interface ge-0/0/23: Replication
- Community-1 VLAN on interface ge-0/0/9 and ge-0/0/16: Receives traffic
- Promiscuous trunk port: Traffic exits from ge-0/0/0 with tag 100
- Community-2: Interface receives no traffic
- Isolated VLANs: Interfaces receive no traffic

### Isolated VLAN Sending Untagged Traffic

In this scenario, isolated VLAN1 on Switch 1 at interface ge-1/0/0 sends untagged traffic. The arrows in Figure 21 on page 1397 represent this traffic flow.



Figure 21: Isolated VLAN Sends Untagged Traffic

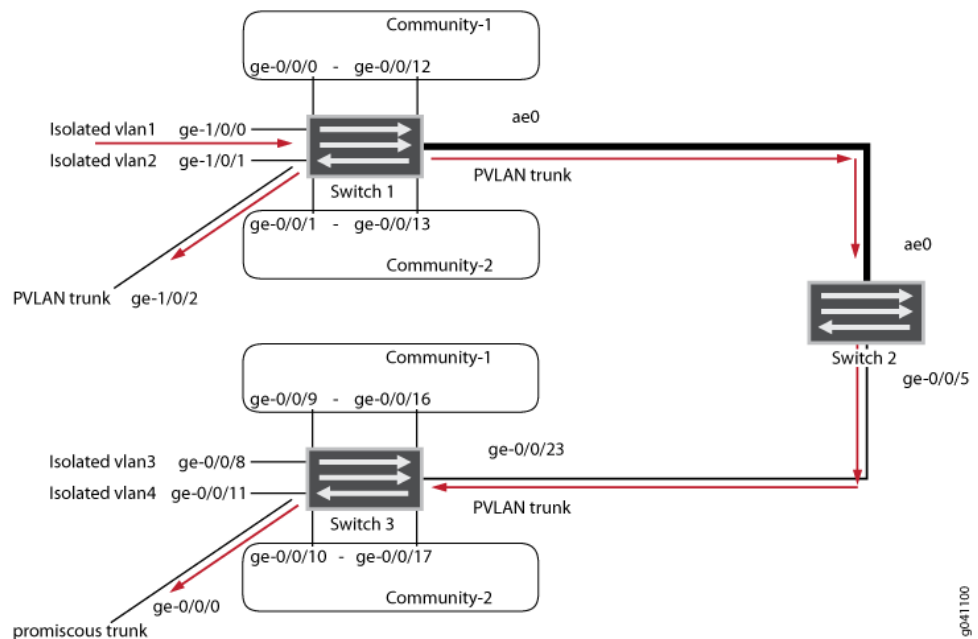

In this scenario, the following activity takes place on Switch 1:

- Isolated VLAN1 on interface ge-1/0/0: Learning
- pvlan100 on interface ge-1/0/0: Replication
- Traffic exits from pvlan-trunk ge-1/0/2 and ae0 with tag 50
- Community-1 and Community-2: Interfaces receive no traffic
- Isolated VLANs: Interfaces receive no traffic

In this scenario, this activity takes place on Switch 3:


- VLAN on interface ge-0/0/23 (PVLAN trunk port): Learning
- pvlan100 on interface ge0/0/23: Replication
- Promiscuous trunk port: Traffic exits from ge-0/0/0 with tag 100
- Community-1 and Community-2: Interfaces receive no traffic
- Isolated VLANs: Receive no traffic

### PVLAN Tagged Traffic Sent on a Promiscuous Port

In this scenario, PVLAN tagged traffic is sent on a promiscuous port. The arrows in [Figure 22 on page 1398](#) represent this traffic flow.



Figure 22: PVLAN Tagged Traffic Sent on a Promiscuous Port

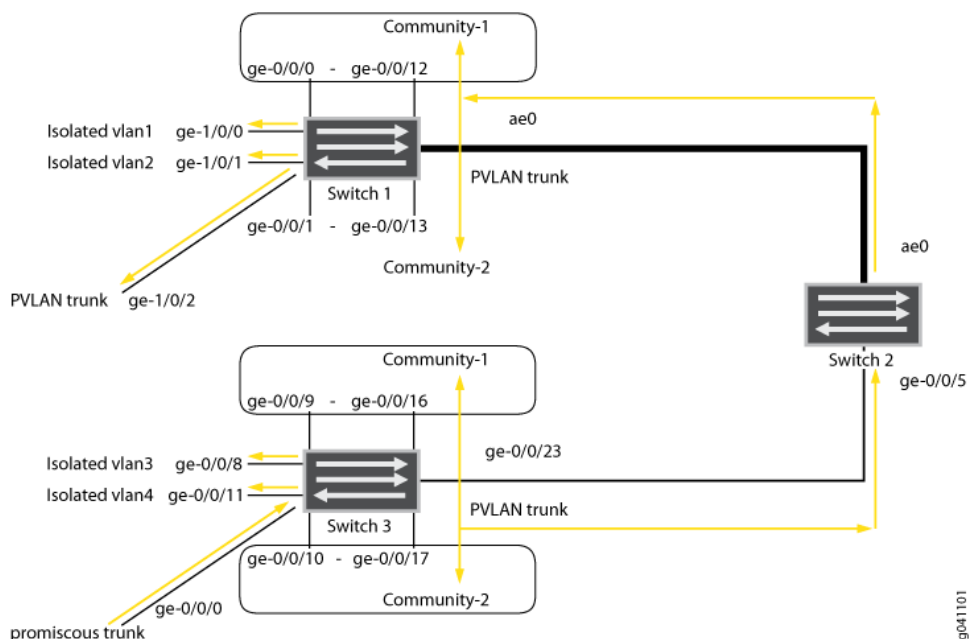

In this scenario, the following activity takes place on Switch 1:

- pvlan100 VLAN on interface ae0 (PVLAN trunk): Learning
- Community-1, Community-2, and all isolated VLANs on interface ae0: Replication
- VLAN on interface ae0: Replication
- Traffic exits from pvlan-trunk ge-1/0/2 with tag 100
- Community-1 and Community-2: Interfaces receive traffic
- Isolated VLANs: Receive traffic

In this scenario, this activity takes place on Switch 3:

- pvlan100 on interface ge-0/0/0: Learning
- Community-1, Community-2 and all isolated VLANs on interface ge-0/0/0: Replication
- VLAN on interface ge-0/0/0: Replication
- Community-1 and Community-2: Interfaces receive traffic
- Isolated VLANs: Receive traffic

#### Related Documentation

- Understanding Private VLANs on EX Series Switches
- Example: Configuring a Private VLAN on a Single EX Series Switch
- Example: Configuring a Private VLAN Spanning Multiple EX Series Switches
- Creating a Private VLAN on a Single EX Series Switch (CLI Procedure)
- Creating a Private VLAN Spanning Multiple EX Series Switches (CLI Procedure)



- [Understanding Private VLANs on page 1389](#)
- [Creating a Private VLAN on a Single Switch on page 1560](#)
- [Creating a Private VLAN Spanning Multiple Switches on page 1561](#)
- [Example: Configuring a Private VLAN on a Single Switch on page 1510](#)
- [Example: Configuring a Private VLAN Spanning Multiple Switches on page 1515](#)

## Understanding Secondary VLAN Trunk Ports and Promiscuous Access Ports on PVLANS

VLANs limit broadcasts to specified users. Private VLANs (PVLANS) take this concept a step further by splitting a VLAN into multiple broadcast subdomains and essentially putting secondary VLANs inside a primary VLAN. PVLANS restrict traffic flows through their member ports so that these ports communicate only with a specified uplink trunk port or with specified ports within the same VLAN. The uplink trunk port is usually connected to a router, firewall, server, or provider network. A PVLAN typically contains many private ports that communicate only with a single uplink, thereby preventing the ports from communicating with each other.

Secondary trunk ports and promiscuous access ports extend the functionality of PVLANS for use in complex deployments, such as:

- Enterprise VMWare Infrastructure environments
- Multitenant cloud services with VM management
- Web hosting services for multiple customers

For example, you can use secondary VLAN trunk ports to connect QFX devices to VMware servers that are configured with private VLANs. You can use promiscuous access ports to connect QFX devices to systems that do not support trunk ports but do need to participate in private VLANs.

This topic explains the following concepts regarding PVLANS on the QFX Series:

- [PVLAN Port Types on page 1399](#)
- [Secondary VLAN Trunk Port Details on page 1400](#)
- [Use Cases on page 1401](#)

### PVLAN Port Types

PVLANS can use the following different port types:

- Promiscuous trunk port—A promiscuous port is an upstream trunk port connected to a router, firewall, server, or provider network. A promiscuous trunk port can communicate with all interfaces, including the isolated and community ports within a PVLAN.
- PVLAN trunk port—A PVLAN trunk port is required in multiswitch PVLAN configurations to span the switches. The PVLAN trunk port is a member of all VLANs within the PVLAN (that is, the primary VLAN, the community VLANs, and the interswitch isolated VLAN), and it carries traffic from the primary VLAN and all secondary VLANs. It can communicate with all ports.



Communication between a PVLAN trunk port and an isolated port is usually unidirectional. A PVLAN trunk port's membership in the interswitch isolated VLAN is egress-only, meaning that an isolated port can forward packets to a PVLAN trunk port, but a PVLAN trunk port does not forward packets to an isolated port (unless the packets ingressed on a promiscuous access port and are therefore being forwarded to all the secondary VLANs in the same primary VLAN as the promiscuous port).

- Secondary VLAN trunk port—Secondary VLAN trunk ports carry secondary VLAN traffic. For a given private (primary) VLAN, a secondary VLAN trunk port can carry traffic for only one secondary VLAN. However, a secondary VLAN trunk port can carry traffic for multiple secondary VLANs as long as each secondary VLAN is a member of a different primary VLAN. For example, a secondary VLAN trunk port can carry traffic for a community VLAN that is part of primary VLAN pvlan100 and also carry traffic for an isolated VLAN that is part of primary VLAN pvlan400.



**NOTE:** When traffic egresses from a secondary VLAN trunk port, it normally carries the tag of the primary VLAN that the secondary port is a member of. If you want traffic that egresses from a secondary VLAN trunk port to retain its secondary VLAN tag, use the [extend-secondary-vlan-id](#) statement.

- Community port—Community ports communicate among themselves and with their promiscuous ports. Community ports serve only a select group of users. These interfaces are separated at Layer 2 from all other interfaces in other communities or isolated ports within their PVLAN.
- Isolated access port—Isolated ports have Layer 2 connectivity only with promiscuous ports and PVLAN trunk ports. An isolated access port cannot communicate with another isolated port even if these two ports are members of the same isolated VLAN.
- Promiscuous access port—These ports carry untagged traffic and can be a member of only one primary VLAN. Traffic that ingresses on a promiscuous access port is forwarded to the ports of the secondary VLANs that are members of the primary VLAN that the promiscuous access port is a member of. In this case, the traffic carries the appropriate secondary VLAN tag when it egresses from the secondary VLAN port if the secondary VLAN port is a trunk port. If traffic ingresses on a secondary VLAN port and egresses on a promiscuous access port, the traffic is untagged on egress. If tagged traffic ingresses on a promiscuous access port, the traffic is discarded.

---

### Secondary VLAN Trunk Port Details

---

When using a secondary VLAN trunk port, be aware of the following:

- You must configure an isolation VLAN ID for each primary VLAN that the secondary VLAN trunk port will participate in. This is true even if the secondary VLANs that the secondary VLAN trunk port will carry are confined to a single device.
- If you configure a port to be a secondary VLAN trunk port for a given primary VLAN, you can also configure the same physical port to be any of the following:



- Secondary VLAN trunk port for another primary VLAN
- PVLAN trunk for another primary VLAN
- Promiscuous trunk port
- Access port for a non-private VLAN
- Traffic that ingresses on a secondary VLAN trunk port (with a secondary VLAN tag) and egresses on a PVLAN trunk port retains the secondary VLAN tag on egress.
- Traffic that ingresses on a secondary VLAN trunk port and egresses on a promiscuous trunk port has the appropriate primary VLAN tag on egress.
- Traffic that ingresses on a secondary VLAN trunk port and egresses on a promiscuous access port is untagged on egress.
- Traffic that ingresses on a promiscuous trunk port with a primary VLAN tag and egresses on a secondary VLAN trunk port carries the appropriate secondary VLAN tag on egress. For example, assume that you have configured the following on a switch:
  - Primary VLAN 100
  - Community VLAN 200 as part of the primary VLAN
  - Promiscuous trunk port
  - Secondary trunk port that carries community VLAN 200

If a packet ingresses on the promiscuous trunk port with primary VLAN tag 100 and egresses on the secondary VLAN trunk port, it carries tag 200 on egress.

### Use Cases

On the same physical interface, you can configure multiple secondary VLAN trunk ports (in different primary VLANs) or combine a secondary VLAN trunk port with other types of VLAN ports. The following use cases provide examples of doing this and show how traffic would flow in each case:

- [Secondary VLAN Trunks In Two Primary VLANs on page 1401](#)
- [Secondary VLAN Trunk and Promiscuous Trunk on page 1403](#)
- [Secondary VLAN Trunk and PVLAN Trunk on page 1404](#)
- [Secondary VLAN Trunk and Non-Private VLAN Interface on page 1406](#)
- [Traffic Ingressing on Promiscuous Access Port on page 1407](#)

#### **Secondary VLAN Trunks In Two Primary VLANs**

For this use case, assume you have two switches with the following configuration:


- Primary VLAN pvlan100 with tag 100.
  - Isolated VLAN isolated200 with tag 200 is a member of pvlan100.
  - Community VLAN comm300 with tag 300 is a member of pvlan100.
- Primary VLAN pvlan400 with tag 400.



- Isolated VLAN isolated500 with tag 500 is a member of pvlan400.
- Community VLAN comm600 with tag 600 is a member of pvlan400.
- Interface xe-0/0/0 on Switch 1 connects to a VMware server (not shown) that is configured with the private VLANs used in this example. This interface is configured with secondary VLAN trunk ports to carry traffic for secondary VLAN comm600 and the isolated VLAN (tag 200) that is a member of pvlan100.
- Interface xe-0/0/0 on Switch 2 is shown configured as a promiscuous trunk port or promiscuous access port. In the latter case, you can assume that it connects to a system (not shown) that does not support trunk ports but is configured with the private VLANs used in this example.
- On Switch 1, xe-0/0/6 is a member of comm600 and is configured as a trunk port.
- On Switch 2, xe-0/0/6 is a member of comm600 and is configured as an access port.

Figure 23 on page 1402 shows this topology and how traffic for isolated200 and comm600 would flow after ingressing on xe-0/0/0 on Switch 1. Note that traffic would flow only where the arrows indicate. For example, there are no arrows for interfaces xe-0/0/2, xe-0/0/3, and xe-0/0/5 on Switch 1 because no packets would egress on those interfaces.

**Figure 23: Two Secondary VLAN Trunk Ports on One Interface**

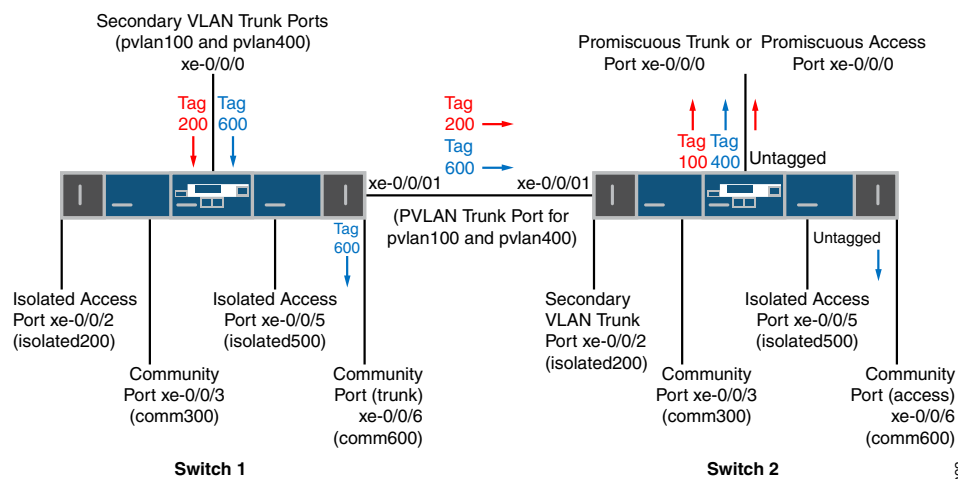

Here is the traffic flow for VLAN isolated200:

1. After traffic for isolated200 ingresses on the secondary VLAN trunk port on Switch 1, it egresses on the PVLAN trunk port because the PVLAN trunk port is a member of all the VLANs. The packets keep the secondary VLAN tag (200) when egressing.
2. After traffic for isolated200 ingresses on the secondary VLAN trunk port on Switch 2, it egresses on xe-0/0/0, which is configured as a promiscuous trunk port or promiscuous access port.
  - If xe-0/0/0 on Switch 2 is configured as a promiscuous trunk port, the packets egress on this port with the primary VLAN tag (100).



- If xe-0/0/0 on Switch 2 is configured as a promiscuous access port, the packets egress on this port untagged.

Note that traffic for VLAN isolated200 does not egress on isolated access port xe-0/0/2 on Switch 1 or secondary VLAN trunk port xe-0/0/2 on Switch 2 even though these two ports are members of the same isolated VLAN.

Here is the traffic flow for VLAN comm600:

1. After traffic for comm600 ingresses on the secondary VLAN trunk port on Switch 1, it egresses on the PVLAN trunk port because the PVLAN trunk port is a member of all the VLANs. The packets keep the secondary VLAN tag (600) when egressing.
2. Traffic for comm600 also egresses on community port xe-0/0/6 on Switch 1. The traffic is tagged because the port is configured as a trunk.
3. After traffic for comm600 ingresses on the PVLAN trunk port on Switch 2, it egresses on xe-0/0/0, if this interface is configured as a promiscuous trunk port.



**NOTE:** If xe-0/0/0 on Switch 2 is configured as a promiscuous access port, the port can participate in only one primary VLAN. In this case, the promiscuous access port is part of pvlan100, so traffic for comm600 does not egress from it


4. Traffic for comm600 also egresses on community port xe-0/0/6 on Switch 2. In this case, the traffic is untagged because the port mode is access.

### ***Secondary VLAN Trunk and Promiscuous Trunk***

For this use case, assume you have two switches configured with the same ports and VLANs as in the previous use case, with one exception: In this case, xe-0/0/0 on Switch 1 is configured as a secondary VLAN trunk port for VLAN pvlan100 and is also configured as a promiscuous trunk port for pvlan400.

Figure 24 on page 1404 shows this topology and how traffic for isolated200 (member of pvlan100) and comm600 (member of pvlan400) would flow after ingressing on Switch 1.

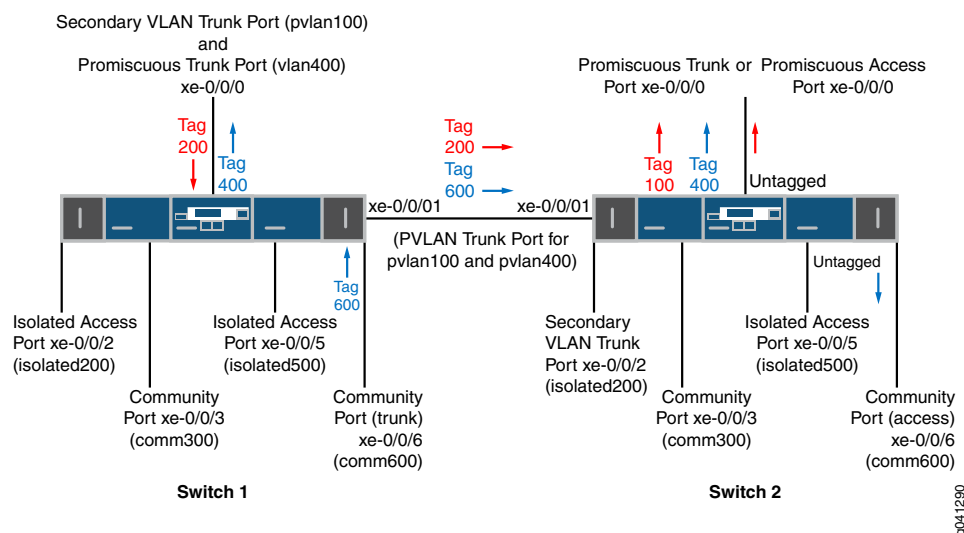

**Figure 24: Secondary VLAN Trunk and Promiscuous Trunk on One Interface**

The traffic flow for VLAN isolated200 is the same as in the previous use case, but the flow for comm600 is different. Here is the traffic flow for VLAN comm600:

1. After traffic for comm600 ingresses on community VLAN port xe-0/0/6 on Switch 1, it egresses on promiscuous trunk port xe-0/0/0 on Switch 1. In this case it carries the primary VLAN tag (400).
2. Traffic for comm600 also egresses on the PVLAN trunk port because the PVLAN trunk port is a member of all the VLANs. The packets keep the secondary VLAN tag (600) when egressing.
3. After traffic for comm600 ingresses on the PVLAN trunk port on Switch 2, it egresses on xe-0/0/0, if this interface is configured as a promiscuous trunk port. It does not egress on xe-0/0/0 if this interface is configured as a promiscuous access port because the port can participate only in pvlan100.
4. Traffic for comm600 also egresses on community port xe-0/0/6 on Switch 2.


### **Secondary VLAN Trunk and PVLAN Trunk**

For this use case, assume you have two switches configured with the same ports and VLANs as in the previous use cases except that xe-0/0/0 on Switch 1 is configured as a secondary VLAN trunk port for VLAN pvlan100 and is also configured as a PVLAN trunk port for pvlan400.

Figure 25 on page 1405 shows this topology and how traffic for comm300 (member of pvlan100) and comm600 (member of pvlan400) would flow after ingressing on Switch 1.



Figure 25: Secondary VLAN Trunk and PVLAN Trunk on One Interface

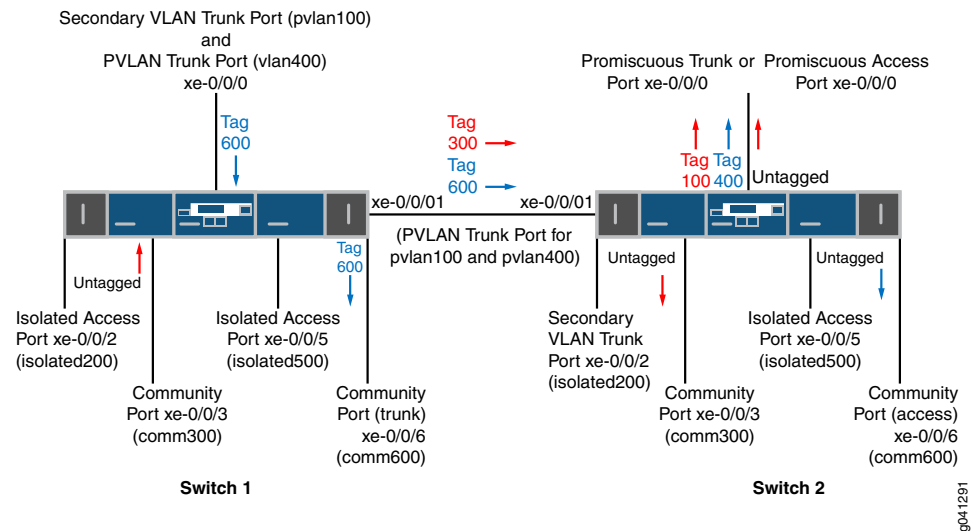

Here is the traffic flow for VLAN comm300:

1. After traffic for comm300 ingresses on community port xe-0/0/3 on Switch 1, it egresses on PVLAN trunk port xe-0/0/1 because that PVLAN trunk port is a member of all the VLANs. The packets keep the secondary VLAN tag (300) when egressing.



**NOTE:** Traffic for comm300 does not egress on xe-0/0/0 because the secondary VLAN trunk port on this interface carries isolated200, not comm300.

2. After traffic for comm300 ingresses on the PVLAN trunk port on Switch 2, it egresses on xe-0/0/0, which is configured as a promiscuous trunk port or promiscuous access port.
  - If xe-0/0/0 on Switch 2 is configured as a promiscuous trunk port, the packets egress on this port with the primary VLAN tag (100).
  - If xe-0/0/0 on Switch 2 is configured as a promiscuous access port, the packets egress on this port untagged.
3. Traffic for comm300 also egresses on community port xe-0/0/3 on Switch 2.

Here is the traffic flow for VLAN comm600:

1. After traffic for comm600 ingresses on the PVLAN port xe-0/0/0 on Switch 1, it egresses on the community port xe-0/0/6 on Switch 1. The packets keep the secondary VLAN tag (600) when egressing because xe-0/0/6 is a trunk port.
2. Traffic for comm600 also egresses on PVLAN trunk port xe-0/0/1 because that PVLAN trunk port is a member of all the VLANs. The packets keep the secondary VLAN tag (600) when egressing.



- After traffic for comm600 ingresses on the PVLAN trunk port on Switch 2, it egresses on xe-0/0/0, if this interface is configured as a promiscuous trunk port.

It does not egress on xe-0/0/0 if this interface is configured as a promiscuous access port because the port can participate only in pvlan100.

- Traffic for comm600 also egresses on community port xe-0/0/6 on Switch 2. This traffic is untagged on egress because xe-0/0/6 is an access port.


### Secondary VLAN Trunk and Non-Private VLAN Interface

For this use case, assume you have two switches configured with the same ports and VLANs as in the previous use cases except for these differences:

- Configuration for xe-0/0/0 on Switch 1:
  - Secondary VLAN trunk port for VLAN pvlan100
  - Access port for vlan700
- Port xe-0/0/6 on both switches is an access port for vlan700.

Figure 26 on page 1406 shows this topology and how traffic for isolated200 (member of pvlan100) and vlan700 would flow after ingressing on Switch 1.

**Figure 26: Secondary VLAN Trunk and Non-Private VLAN Port on One Interface**

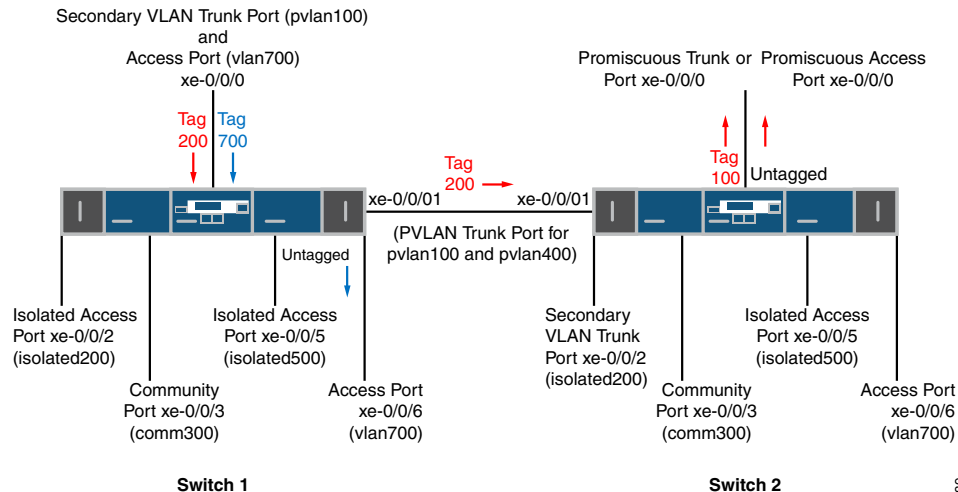

Here is the traffic flow for VLAN isolated200:

- After traffic for isolated200 ingresses on the secondary VLAN trunk port on Switch 1, it egresses on the PVLAN trunk port. The packets keep the secondary VLAN tag (200) when egressing.
- After traffic for isolated200 ingresses on the PVLAN trunk port on Switch 2, it egresses on xe-0/0/0, which is configured as a promiscuous trunk port or promiscuous access port.



- If xe-0/0/0 on Switch 2 is configured as a promiscuous trunk port, the packets egress on this port with the primary VLAN tag (100).
- If xe-0/0/0 on Switch 2 is configured as a promiscuous access port, the packets egress on this port untagged.


Note that traffic for VLAN isolated200 does not egress on isolated access port xe-0/0/2 on Switch 1 or secondary VLAN trunk port xe-0/0/2 on Switch 2 even though these two ports are members of the same isolated VLAN.

After traffic for vlan700 ingresses on the access port configured on xe-0/0/0 on Switch 1, it egresses on access port xe-0/0/6 because that port is a member of the same VLAN. Traffic for vlan700 is not forwarded to Switch 2 (even though xe-0/0/6 on Switch 2 is a member of vlan700) because the PVLAN trunk on xe-0/0/1 does not carry this VLAN.

### *Traffic Ingressing on Promiscuous Access Port*

For this use case, assume you have two switches configured with the same ports and VLANs as in the previous use case except that xe-0/0/0 on Switch 1 is configured as a promiscuous access port and is a member of pvlan100. Figure 27 on page 1407 shows this topology and how untagged traffic would flow after ingressing through this interface on Switch 1.

**Figure 27: Traffic Ingressing on Promiscuous Access Port**

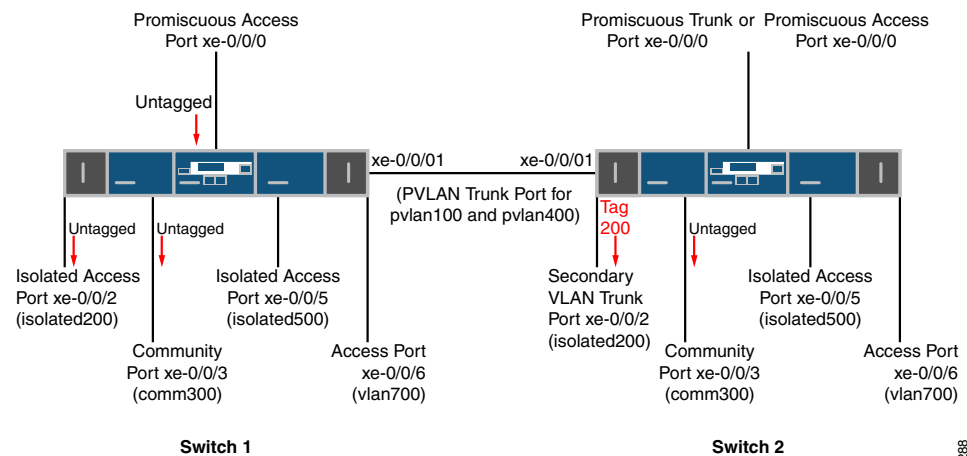

g041288

As the figure shows, untagged traffic that ingresses on a promiscuous access port is forwarded to all the secondary VLAN ports that are members of the same primary VLAN that the promiscuous access port is a member of. The traffic is untagged when it egresses from access ports and tagged on egress from a trunk port (xe-0/0/2 on Switch 2).

### **Related Documentation**

- [Understanding Private VLANs on page 1389](#)
- [Example: Configuring PVLANS with Secondary VLAN Trunk Ports and Promiscuous Access Ports on page 1529](#)
- [Creating a Private VLAN on a Single Switch on page 1560](#)



- [Creating a Private VLAN Spanning Multiple Switches on page 1561](#)
- [Understanding Egress Firewall Filters with PVLANS on page 1408](#)
- [Troubleshooting Private VLANs on page 1763](#)

## Understanding Egress Firewall Filters with PVLANS

If you apply firewall filters to private VLANs in the output direction, the behavior of the filters might be unexpected. This topic explains how egress filters behave when applied to private VLANs.

If you apply a firewall filter in the output direction to a primary VLAN, the filter also applies to the secondary VLANs that are members of the primary VLAN when the traffic egresses with the primary VLAN tag or isolated VLAN tag, as listed below:

- Traffic forwarded from a secondary VLAN trunk port to a promiscuous port (trunk or access)
- Traffic forwarded from a secondary VLAN trunk port to a PVLAN trunk port.
- Traffic forwarded from a promiscuous port (trunk or access) to a secondary VLAN trunk port
- Traffic forwarded from a PVLAN trunk port. to a secondary VLAN trunk port
- Traffic forwarded from a community port to a promiscuous port (trunk or access)

If you apply a firewall filter in the output direction to a primary VLAN, the filter does *not* apply to traffic that egresses with a community VLAN tag, as listed below:

- Traffic forwarded from a community trunk port to a PVLAN trunk port
- Traffic forwarded from a promiscuous port (trunk or access) to a community trunk port
- Traffic forwarded from a PVLAN trunk port. to a community trunk port

If you apply a firewall filter in the output direction to a community VLAN, the following behaviors apply:

- The filter is applied to traffic forwarded from a promiscuous port (trunk or access) to a community trunk port (because the traffic egresses with the community VLAN tag).
- The filter is applied to traffic forwarded from a community port to a PVLAN trunk port (because the traffic egresses with the community VLAN tag).
- The filter is *not* applied to traffic forwarded from a community port to a promiscuous port (because the traffic egresses with the primary VLAN tag or untagged).

### Related Documentation

- [Understanding Private VLANs on page 1389](#)
- [Example: Configuring PVLANS with Secondary VLAN Trunk Ports and Promiscuous Access Ports on page 1529](#)
- [Creating a Private VLAN on a Single Switch on page 1560](#)



- [Creating a Private VLAN Spanning Multiple Switches on page 1561](#)
- [Troubleshooting Private VLANs on page 1763](#)

---

## Spanning Trees Overview

---

- [Overview of Spanning-Tree Protocols on page 1409](#)
- [Understanding MSTP on page 1410](#)
- [Understanding RSTP on page 1411](#)
- [Understanding VSTP on page 1412](#)
- [Understanding BPDU Protection for STP, RSTP, and MSTP on page 1413](#)
- [Understanding Loop Protection for STP, RSTP, VSTP, and MSTP on page 1414](#)
- [Understanding Root Protection for STP, RSTP, VSTP, and MSTP on page 1415](#)

### Overview of Spanning-Tree Protocols

QFX Series switches provide Layer 2 loop prevention through Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), Multiple Spanning Tree Protocol (MSTP), and VLAN Spanning Tree Protocol (VSTP). The default spanning-tree protocol on the QFX Series is RSTP. RSTP provides faster convergence times than STP. However, some legacy networks require the slower convergence times of basic STP.

The STP support provided for the QFX Series includes:

- IEEE 802.1d
- 802.1w RSTP
- 802.1s MSTP

If your network includes IEEE 802.1D 1998 bridges, you can remove RSTP and explicitly configure STP. See [“Configuring STP” on page 1556](#). When you explicitly configure STP, the QFX Series products use the IEEE 802.1D 2004 specification, force version 0. This configuration runs a version of RSTP that is compatible with the classic, basic STP. If you use virtual LANs (VLANs), you should enable VSTP and use it on your network. See [“Understanding VSTP” on page 1412](#).

You can use the same operational commands (**show spanning-tree bridge** and **show spanning-tree interface**) to check the status of your spanning-tree configuration, regardless of which spanning-tree protocol has been configured.

STP uses bridge protocol data unit (BPDU) packets to exchange information with other switches. BPDUs send hello packets out at regular intervals to exchange information across bridges and detect loops in a network topology. There are two types of BPDUs:

- Configuration BPDUs—These BPDUs contain configuration information about the transmitting switch and its ports, including switch and port MAC addresses, switch priority, port priority, and port cost.



- Topology change notification (TCN) BPDUs—When a bridge needs to signal a topology change, it starts to send TCNs on its root port. The designated bridge receives the TCN, acknowledges it, and generates another one for its own root port. The process continues until the TCN reaches the root bridge.

STP uses the information provided by the BPDUs to elect a root bridge, identify root ports for each switch, identify designated ports for each physical LAN segment, and prune specific redundant links to create a loop-free tree topology. All leaf devices calculate the best path to the root device and place their ports in blocking or forwarding states based on the best path to the root. The resulting tree topology provides a single active Layer 2 data path between any two end stations.

### Understanding Spanning Tree Protocols on a QFabric System

Although there is no need to run STP in a QFabric system, you can connect a QFabric system to another Layer 2 device and use STP. STP traffic can only be processed on network Node groups. Other Node groups, such as redundant server Node groups and server Node groups, discard the STP bridge protocol data units (BPDUs) traffic and disable the interface automatically. Server Node groups only process host-facing protocols, whereas Network Node groups process all supported protocols.

#### **Related Documentation**

- [Understanding BPDUs for STP, RSTP, and MSTP on page 1413](#)
- [Understanding MSTP on page 1410](#)
- [Understanding RSTP on page 1411](#)
- [Understanding VSTP on page 1412](#)

## Understanding MSTP

Although RSTP provides faster convergence time than STP does, it still does not solve a problem inherent in STP: all VLANs within a LAN must share the same spanning tree. To solve this problem, the QFX Series products use Multiple Spanning Tree Protocol (MSTP) to create a loop-free topology in networks with multiple spanning-tree regions.

An MSTP region allows a group of bridges to be modeled as a single bridge. An MSTP region contains multiple spanning-tree instances (MSTIs). MSTIs provide different paths for different VLANs. This functionality facilitates more efficient load sharing across redundant links.

An MSTP region can support up to 64 MSTIs, and each instance can support from 1 through 4094 VLANs.

#### **Related Documentation**

- [Overview of Spanning-Tree Protocols on page 1409](#)
- [Understanding RSTP on page 1411](#)
- [Example: Configuring Network Regions for VLANs with MSTP on page 1441](#)



## Understanding RSTP

Juniper Networks QFX Series products use Rapid Spanning Tree Protocol (RSTP) on the network side of the QFX Series to provide quicker convergence time than the base Spanning Tree Protocol (STP) does. RSTP identifies certain links as point to point. When a point-to-point link fails, the alternate link can transition to the forwarding state, which speeds up convergence.

Although STP provides basic loop prevention functionality, it does not provide fast network convergence when there are topology changes. The STP process to determine network state transitions is slower than the RSTP process because it is timer-based. A device must reinitialize every time a topology change occurs. The device must start in the listening state and transition to the learning state and eventually to a forwarding or blocking state. When default values are used for the maximum age (20 seconds) and forward delay (15 seconds), it takes 50 seconds for the device to converge. RSTP converges faster because it uses a handshake mechanism based on point-to-point links instead of the timer-based process used by STP.

For networks with virtual LANs (VLANs), you can use VLAN Spanning Tree Protocol (VSTP), which takes the paths of each VLAN into account when calculating routes. VSTP uses RSTP by default.

An RSTP domain running from the edge outward on a QFX Series product has the following components:

- A *root port*, which is the “best path” to the root device.
- A *designated port*, which indicates that the switch is the designated bridge for the other switch connecting to this port.
- An *alternate port*, which provides an alternate root port.
- A *backup port*, which provides an alternate designated port.

Port assignments change through messages exchanged throughout the domain. An RSTP device generates configuration messages once per hello time interval. If an RSTP device does not receive a configuration message from its neighbor after an interval of three hello times, it determines that the connection with the neighbor is lost. When a *root port* or a *designated port* fails on a device, the device generates a configuration message with the proposal bit set. Once its neighbor device receives this message, it verifies that this configuration message is valid for that port and starts a *synchronizing* operation to ensure that all of its ports are in sync with the new information.

Similar sets of messages propagate through the network, restoring the connectivity very quickly after a topology change (in a well-designed network that uses RSTP, network convergence can take as little as 0.5 seconds). If a device does not receive an agreement to a proposal message it has sent, it returns to the original IEEE 802.D convention.

RSTP was originally defined in the IEEE 802.1w draft specification and later incorporated into the IEEE 802.1D-2004 specification.



VSTP and RSTP can be configured at the same time. If you configure VSTP and RSTP at the same time and the switch has more than 253 VLANs, VSTP is configured only for the first 253 VLANs. For the remaining VLANs, only RSTP is configured. RSTP and VSTP are the only spanning-tree protocols that can be configured at the same time on the QFX Series.

**Related  
Documentation**

- [Overview of Spanning-Tree Protocols on page 1409](#)
- [Understanding MSTP on page 1410](#)
- [Understanding VSTP on page 1412](#)
- [Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428](#)

## Understanding VSTP

VLAN Spanning Tree Protocol (VSTP) enables Juniper Networks switches to run one or more Spanning Tree Protocol (STP) or Rapid Spanning Tree Protocol (RSTP) instances for each VLAN on which VSTP is enabled. For networks with multiple VLANs, VSTP improves intelligent tree spanning by defining best paths within the VLANs instead of within the entire network.

You can configure VSTP for a maximum of 253 VLANs.

VSTP and RSTP can be configured at the same time. If you configure VSTP and RSTP at the same time and the switch has more than 253 VLANs, VSTP is configured only for the first 253 VLANs. For the remaining VLANs, only RSTP is configured. RSTP and VSTP are the only spanning-tree protocols that can be configured at the same time on a switch.



**NOTE:** We recommend that you enable VSTP on all VLANs that could receive VSTP bridge protocol data units (BPDUs).

**Related  
Documentation**

- [Overview of Spanning-Tree Protocols on page 1409](#)
- [Understanding RSTP on page 1411](#)
- [Configuring VLAN Spanning Tree Protocol on page 1557](#)
- [vstp on page 1656](#)



## Understanding BPDU Protection for STP, RSTP, and MSTP



**NOTE:** You can disable BPDU protection on interfaces by issuing the `set ethernet-switching-options bpdu-block interface-name disable` command.

A Juniper Networks QFX Series product provides Layer 2 loop prevention through Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), VLAN Spanning Tree Protocol (VSTP), and Multiple Spanning Tree Protocol (MSTP). Bridge protocol data unit (BPDU) protection can help prevent STP misconfigurations that can lead to network outages.

A loop-free network is supported through the exchange of a special type of frame called a BPDU. Receipt of BPDUs on certain interfaces in an STP, RSTP, VSTP, or MSTP topology, however, can lead to network outages. Enable BPDU protection on those interfaces to prevent these outages.

Peer STP applications running on the switch interfaces use BPDUs to communicate. Ultimately, the exchange of BPDUs determines which interfaces block traffic and which interfaces become root ports and forward traffic.

However, a user bridge application running on a device connected to the switch can also generate BPDUs. If these BPDUs are picked up by STP applications running on the switch, they can trigger STP miscalculations, and those miscalculations can lead to network outages.

Enable BPDU protection on switch interfaces connected to user devices or on interfaces on which no BPDUs are expected, such as edge ports. If BPDUs are received on a protected interface, the interface is disabled and stops forwarding frames.

Not only can you configure BPDU protection on a switch with a spanning tree, but also on a switch without a spanning tree. This type of topology typically consists of a non-STP switch connected to an STP switch through a trunk interface.

To configure BPDU protection on a switch with a spanning tree, include the **bpdu-block-on-edge** statement at the `[edit protocols (stp | mstp | rstp)]` hierarchy level. To configure BPDU protection on a switch without a spanning tree, include the **bpdu-block** statement at the `[edit ethernet-switching-options interface interface-name]` hierarchy level.

If BPDUs are sent to an interface (indicating that the misconfiguration has been corrected), the interface can be unblocked in one of two ways:

- If the **disable-timeout** statement has been included in the BPDU configuration, the interface automatically returns to service after the timer expires.
- Use the operational mode command **clear ethernet-switching bpdu-error**.

Disabling the BPDU protection configuration does not unblock the interface.

### Related Documentation

- [Example: Configuring BPDU Protection on STP Interfaces to Prevent STP Miscalculations on page 1495](#)



- [Understanding Loop Protection for STP, RSTP, VSTP, and MSTP on page 1414](#)
- [Understanding Root Protection for STP, RSTP, VSTP, and MSTP on page 1415](#)
- [Understanding MSTP on page 1410](#)
- [Understanding RSTP on page 1411](#)
- [Understanding VSTP on page 1412](#)

## Understanding Loop Protection for STP, RSTP, VSTP, and MSTP

A Juniper Networks QFX Series product provides Layer 2 loop prevention through Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), VLAN Spanning Tree Protocol (VSTP), and Multiple Spanning Tree Protocol (MSTP). Loop protection increases the efficiency of STP, RSTP, and MSTP by preventing ports from entering a forwarding state that would cause a loop to open in the network.

A loop-free network in spanning-tree topologies is supported through the exchange of a special type of frame called a bridge protocol data unit (BPDU). Peer STP applications running on the switch interfaces use BPDUs to communicate. Ultimately, the exchange of BPDUs determines which interfaces block traffic (preventing loops) and which interfaces become root ports and forward traffic.

However, a blocking interface can mistakenly transition to the forwarding state if the interface stops receiving BPDUs from its designated port on the segment. Such a transition error can occur when there is a hardware error on the switch or software configuration error between the switch and its neighbor.

When loop protection is enabled, the spanning-tree topology detects root ports and blocked ports and ensures that both keep receiving BPDUs. If a loop-protection-enabled interface stops receiving BPDUs from its designated port, it reacts as it would react to a problem with the physical connection on this interface. It does not transition the interface to a forwarding state, but instead transitions it to a loop-inconsistent state. The interface recovers and it transitions back to the spanning-tree blocking state as soon as it receives a BPDU.

We recommend that you enable loop protection on all switch interfaces that have a chance of becoming root or designated ports. Loop protection is most effective when enabled in the entire switched network. When you enable loop protection, you must configure at least one action (**alarm**, **block**, or both).

An interface can be configured for either loop protection or root protection, but not for both.

### Related Documentation

- [Example: Configuring Loop Protection to Prevent Interfaces from Transitioning from Blocking to Forwarding in a Spanning Tree on page 1504](#)
- [Understanding Root Protection for STP, RSTP, VSTP, and MSTP on page 1415](#)
- [Understanding BPDU Protection for STP, RSTP, and MSTP on page 1413](#)
- [Understanding MSTP on page 1410](#)



- [Understanding RSTP on page 1411](#)
- [Overview of Spanning-Tree Protocols on page 1409](#)
- [Understanding VSTP on page 1412](#)

## Understanding Root Protection for STP, RSTP, VSTP, and MSTP

A Juniper Networks QFX Series product provides Layer 2 loop prevention through Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), VLAN Spanning Tree Protocol (VSTP), and Multiple Spanning Tree Protocol (MSTP). A loop-free network is supported through the exchange of a special type of frame called a bridge protocol data unit (BPDU). Peer STP applications running on the switch interfaces use BPDUs to communicate. Ultimately, the exchange of BPDUs determines which interfaces block traffic and which interfaces become root ports and forward traffic.

You can also see BPDUs generated when you run a bridge application on a device attached to the switch. This can interfere with root port election, which may sometimes lead to the wrong root port being elected through the above process. Root protection allows you to manually enforce the root bridge placement in the network.

Enable root protection on interfaces that should not receive higher-priority BPDUs from the root bridge and should not be elected as the root port. These interfaces become designated ports and are typically located on an administrative boundary. If the bridge receives more STP BPDUs on a port that has root protection enabled, that port transitions to a root-prevented STP state (inconsistency state), and the interface is blocked. This blocking prevents a bridge that should not be the root bridge from being elected the root bridge. After the bridge stops receiving more STP BPDUs on the interface with root protection, the interface returns to a listening state, followed by a learning state, and ultimately back to a forwarding state. Recovery back to the forwarding state is automatic.

When root protection is enabled on an interface, it is enabled for all the STP instances on that interface. The interface is blocked only for instances for which it receives more BPDUs. Otherwise, it participates in the spanning-tree topology.

An interface can be configured for either root protection or loop protection, but not for both.

### Related Documentation

- [Example: Configuring Root Protection to Enforce Root Bridge Placement in Spanning Trees on page 1499](#)
- [Example: Configuring Loop Protection to Prevent Interfaces from Transitioning from Blocking to Forwarding in a Spanning Tree on page 1504](#)
- [Example: Configuring BPDU Protection on STP Interfaces to Prevent STP Miscalculations on page 1495](#)
- [Understanding MSTP on page 1410](#)
- [Understanding RSTP on page 1411](#)
- [Overview of Spanning-Tree Protocols on page 1409](#)
- [Understanding VSTP on page 1412](#)



## Q-in-Q Tunneling

---

- [Understanding Q-in-Q Tunneling and VLAN Translation on page 1416](#)

### Understanding Q-in-Q Tunneling and VLAN Translation

Q-in-Q tunneling and VLAN translation allow service providers to create a Layer 2 Ethernet connection between two customer sites. Providers can segregate different customers' VLAN traffic on a link (for example, if the customers use overlapping VLAN IDs) or bundle different customer VLANs into a single service VLAN. Data centers can use Q-in-Q tunneling and VLAN translation to isolate customer traffic within a single site or to enable customer traffic flows between cloud data centers in different geographic locations.

Q-in-Q tunneling adds a service VLAN tag before the customer's 802.1Q VLAN tags. The Juniper Networks Junos operating system implementation of Q-in-Q tunneling supports the IEEE 802.1ad standard.

All of the VLANs in an implementation can be service VLANs. That is, if the total number of supported VLANs is 4090, all of them can be service VLANs.

This topic describes:

- [How Q-in-Q Tunneling Works on page 1416](#)
- [How VLAN Translation Works on page 1417](#)
- [Mapping C-VLANs to S-VLANs on page 1417](#)
- [Routed VLAN Interfaces on Q-in-Q VLANs on page 1418](#)
- [Constraints for Q-in-Q Tunneling and VLAN Translation on page 1418](#)

#### How Q-in-Q Tunneling Works

---

In Q-in-Q tunneling, as a packet travels from a customer VLAN (C-VLAN) to a service provider's or data center VLAN (S-VLAN), another 802.1Q tag for the appropriate S-VLAN is added before the C-VLAN tag. The C-VLAN tag remains and is transmitted through the network. As the packet leaves the S-VLAN in the downstream direction, the S-VLAN 802.1Q tag is removed.

An interface can be a member of multiple S-VLANs. You can map one C-VLAN to one S-VLAN or multiple C-VLANs to one S-VLAN. C-VLAN and S-VLAN tags use separate name spaces, so you can have both a C-VLAN 101 and an S-VLAN 101, for example. You can limit the set of accepted customer tags to a range of tags or to discrete values.

When Q-in-Q tunneling is enabled, trunk interfaces are assumed to be part of the service provider or data center network. Access interfaces are assumed to be customer-facing and accept both tagged and untagged frames. When using many-to-one bundling or mapping a specific interface, you must use the **native** option to specify an S-VLAN for untagged and priority tagged packets if you want to accept these packets. (Priority tagged packets have their VLAN ID set to 0, and their priority code point bits might be configured with a CoS value.) If you do not specify an S-VLAN for them, untagged packets are discarded. The **native** option is not available for all-in-one bundling because there is no



need to specify untagged and priority tagged packets when all packets are mapped to an S-VLAN.

Q-in-Q tunneling does not affect any class-of-service (CoS) values that are configured on a C-VLAN. These settings are retained in the C-VLAN tag and can be used after a packet leaves an S-VLAN. CoS values are not copied from C-VLAN tags to S-VLAN tags.

Depending on your interface configuration, you might need to adjust the MTU value on your trunk or access ports to accommodate the 4 bytes used for the tag added by Q-in-Q tunneling. For example, if you use the default MTU value of 1514 bytes on your access and trunk ports, you need to make one of the following adjustments:

- Reduce the MTU on the access links by at least 4 bytes so that the frames do not exceed the MTU of the trunk link when S-VLAN tags are added.
- Increase the MTU on the trunk link so that the link can handle the larger frame size.



**NOTE:** You can configure Q-in-Q tunneling only on access ports (not trunk ports).

### How VLAN Translation Works

VLAN translation replaces an incoming C-VLAN tag with an S-VLAN tag instead of adding an additional tag. The C-VLAN tag is therefore lost, so a single-tagged packet is normally untagged when it leaves the S-VLAN (at the other end of the link). If an incoming packet has had Q-in-Q tunneling applied in advance, VLAN translation replaces the outer tag and the inner tag is retained when the packet leaves the S-VLAN at the other end of the link.

To configure VLAN translation, use the **mapping swap** statement at the **[edit vlans interface]** hierarchy level.



**NOTE:** You can configure VLAN translation on access ports only. You cannot configure it on trunk ports, and you cannot configure Q-in-Q tunneling on the same access port.

### Mapping C-VLANs to S-VLANs

The three ways to map C-VLANs to an S-VLAN are:

- All-in-one bundling—Use the **edit vlans s-vlan-name dot1q-tunneling** statement without specifying customer VLANs. All packets received on all access interfaces (including untagged packets) are mapped to the S-VLAN.
- Many-to-one bundling—Use the **edit vlans s-vlan-name dot1q-tunneling customer-vlans** statement to specify which C-VLANs are mapped to the S-VLAN. Use this method when you want a subset of the C-VLANs to be part of the S-VLAN. If you want untagged or priority tagged packets to be mapped to the S-VLAN, use the **native** option with the



**customer-vlans** statement. (Priority tagged packets have their VLAN ID set to 0, and their priority code point bits might be configured with a CoS value.)

- Mapping a specific interface—Use the **edit vlans s-vlan-name interface interface-name mapping** statement to specify a C-VLAN for a given S-VLAN. This configuration applies to only one interface—not all access interfaces as with all-in-one and many-to-one bundling. If you want untagged or priority tagged packets to be mapped to the S-VLAN, use the **native** option with the **customer-vlans** statement.

This method has two options: swap and push. With the push option, a packet retains its tag and an additional VLAN tag is added. With the swap option, the incoming tag is replaced with an S-VLAN tag. (This is VLAN translation.)

- You can configure multiple push rules for a given S-VLAN and interface. That is, you can configure an interface so that the same S-VLAN tag is added to packets arriving from multiple C-VLANs.
- You can configure only one swap rule for a given S-VLAN and interface.

This functionality is typically used to keep traffic from different customers separate or to provide individualized treatment for traffic on a certain interface.

If you configure multiple methods, the switch prioritizes the mappings in the following order:

1. Specific interface mapping
2. Many-to-one bundling
3. All-in-one bundling

You cannot configure overlapping rules for the same C-VLAN using the same mapping method. For example, you cannot use many-to-one bundling to map C-VLAN 100 to two different S-VLANs.

### **Routed VLAN Interfaces on Q-in-Q VLANs**

---

Routed VLAN interfaces (RVIs) are supported on Q-in-Q VLANs. Packets arriving on an RVI that is using Q-in-Q VLANs are routed regardless of whether the packet is single-tagged or double-tagged. The original C-VLAN tag is dropped when a packet leaves the VLAN that it originated in. Outgoing routed packets retain any S-VLAN tag only when exiting a trunk interface—S-VLAN tags are dropped when traffic exits an access interface.

### **Constraints for Q-in-Q Tunneling and VLAN Translation**

---

Be aware of the following constraints when configuring Q-in-Q tunneling and VLAN translation:

- Most access port security features are not supported with Q-in-Q tunneling and VLAN translation.
- Configuring Q-in-Q tunneling and VLAN translation on the same port is not supported.



- You can configure at most one VLAN translation for a given VLAN and interface. For example, you can create no more than one translation for VLAN 100 on interface xe-0/0/0.
- The combined total of VLANs and rules for Q-in-Q tunneling and VLAN translation cannot exceed 6000. For example, you can configure and commit 4000 VLANs and 2000 rules for Q-in-Q tunneling and VLAN translation. However, you cannot configure 4000 VLANs and 2500 rules for Q-in-Q tunneling and VLAN translation. If you try to commit a configuration that exceeds the limit, you see CLI and syslog errors that inform you about the problem.
- MAC addresses are learned from S-VLANs, not C-VLANs.
- Broadcast, unknown unicast, and multicast traffic is forwarded to all members in the S-VLAN.
- The following features are not supported with Q-in-Q tunneling:
  - DHCP relay
  - Fibre Channel over Ethernet
  - IP Source Guard
- The following features are not supported with VLAN translation:
  - Fibre Channel over Ethernet
  - Firewall filter applied to a port or VLAN in the output direction
  - Private VLANs
  - VLAN Spanning Tree Protocol
  - Reflective relay

#### Related Documentation

- [Configuring Q-in-Q Tunneling on page 1562](#)
- [Example: Setting Up Q-in-Q Tunneling on page 1541](#)
- [Troubleshooting Q-in-Q and VLAN Translation Configuration on page 1765](#)
- [mtu on page 2097](#)

## Layer 2 Protocol Tunneling

- [Understanding Layer 2 Protocol Tunneling on page 1419](#)

### Understanding Layer 2 Protocol Tunneling

Layer 2 protocol tunneling (L2PT) allows service providers or data centers to send customer Layer 2 protocol data units (PDUs) across a cloud. This feature is useful when you want to run Layer 2 protocols on a network that includes switches located at remote sites that are connected across a service provider network.

For example, a customer might want to run STP between remote sites that are connected by a service provider network. In this case, the STP PDUs sent by the customer equipment



must be tunneled through the service provider network. Otherwise, the customer STP PDUs would be processed by the STP protocol running on the service provider switches.

This topic includes:

- [Layer 2 Protocols Supported by L2PT on page 1420](#)
- [How L2PT Works on page 1421](#)
- [L2PT Basics on page 1423](#)

---

### Layer 2 Protocols Supported by L2PT

---

L2PT supports the following Layer 2 protocols:

- 802.1X authentication
- 802.3ah Operation, Administration, and Maintenance (OAM) link fault management (LFM)



**NOTE:** If you enable L2PT for untagged OAM LFM (Operation, Administration, and Maintenance of link fault management) packets, do not configure link fault management (LFM) on the corresponding access interface.

---

- Cisco Discovery Protocol (CDP)
- Ethernet local management interface (E-LMI)
- MVRP VLAN Registration Protocol (MVRP)
- Link Aggregation Control Protocol (LACP)



**NOTE:** If you enable L2PT for untagged LACP packets, do not configure Link Aggregation Control Protocol (LACP) on the corresponding access interface.

---

- Link Layer Discovery Protocol (LLDP)
- Multiple MAC Registration Protocol (MMRP)
- Multiple VLAN Registration Protocol (MVRP)
- Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), and Multiple Spanning Tree Protocol (MSTP)
- Unidirectional Link Detection (UDLD)
- VLAN Spanning Tree Protocol (VSTP)
- VLAN Trunking Protocol (VTP)






**NOTE:** You cannot configure all of these protocols on QFX Series devices. However, you can tunnel all of them through a QFX Series switch using L2PT.

### How L2PT Works

L2PT works by encapsulating Layer 2 PDUs, tunneling them across a service provider network, and de-encapsulating them for delivery to their destination switches. L2PT encapsulates Layer 2 PDUs by enabling the ingress provider edge (PE) device to rewrite the PDUs' destination media access control (DMAC) addresses before forwarding them onto the service provider network. The devices in the service provider network treat these encapsulated PDUs as multicast Ethernet packets. Upon receipt of these PDUs, the egress PE devices de-encapsulate them by replacing the DMAC addresses with the addresses of the Layer 2 protocol that is being tunneled before forwarding the PDUs to their destination switches.

This process is illustrated in [Figure 28 on page 1421](#):

**Figure 28: L2PT Example**

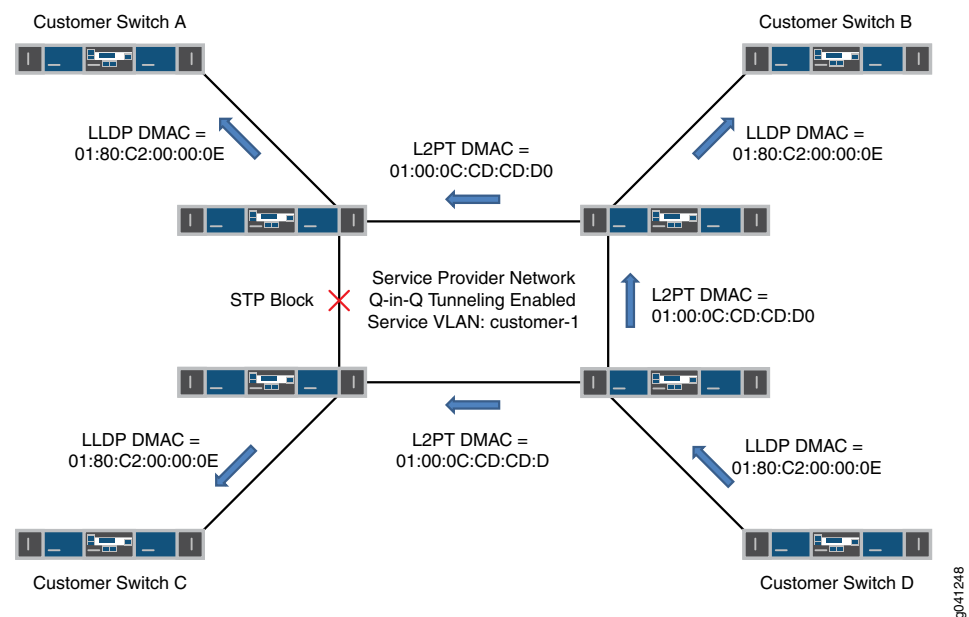

1. Customer Switch D sends to the service provider network an LLDP PDU that is ultimately intended for the other switches in the customer network.
2. The receiving provider switch adds the L2PT DMAC and sends the frame with the encapsulated LLDP PDU to the other switches in the service provider network.
3. When the other service provider switches receive the frame, they restore the LLDP DMAC and send it to Customer Switches A, B, and C.

[Table 107 on page 1422](#) lists the destination MAC addresses of the supported Layer 2 protocols:



Table 107: Protocol Destination MAC Addresses

| Protocol                                                                                                      | Ethernet Encapsulation | MAC Address       |
|---------------------------------------------------------------------------------------------------------------|------------------------|-------------------|
| 802.1X                                                                                                        | Ether-II               | 01:80:C2:00:00:03 |
| 802.3ah                                                                                                       | Ether-II               | 01:80:C2:00:00:02 |
| Cisco Discovery Protocol (CDP)                                                                                | SNAP                   | 01:00:0C:CC:CC:CC |
| Ethernet local management interface (E-LMI)                                                                   | Ether-II               | 01:80:C2:00:00:07 |
| MVRP VLAN Registration Protocol (MVRP)                                                                        | Ether-II               | 01:80C2:00:00:21  |
| Link Aggregation Control Protocol (LACP)                                                                      | Ether-II               | 01:80:C2:00:00:02 |
| Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), and Multiple Spanning Tree Protocol (MSTP) | LLC                    | 01:80:C2:00:00:00 |
| Link Layer Discovery Protocol (LLDP)                                                                          | Ether-II               | 01:80:C2:00:00:0E |
| Multiple MAC Registration Protocol (MMRP)                                                                     | Ether-II               | 01:80:C2:00:00:20 |
| Unidirectional Link Detection (UDLD)                                                                          | SNAP                   | 01:00:0C:CC:CC:CC |
| VLAN Spanning Tree Protocol (VSTP)                                                                            | SNAP                   | 01:00:0C:CC:CC:CD |
| VLAN Trunking Protocol (VTP)                                                                                  | SNAP                   | 01:00:0C:CC:CC:CC |

When a PE device receives a Layer 2 control PDU from any of the customer PE devices, it changes the destination MAC address to 01:00:0C:CD:CD:D0. The modified packet is then sent to the provider network. All devices on the provider network treat these packets as multicast Ethernet packets and deliver them to all PE devices in the VLAN. The egress PE devices receive all the control PDUs with the same MAC address (01:00:0C:CD:CD:D0). Then they identify the packet type by doing deeper packet inspection and replace the destination MAC address 01:00:0C:CD:CD:D0 with the appropriate destination address. The modified PDUs are sent out to the customer PE devices so that the Layer 2 control PDUs are delivered, in their original state, across the provider network. The L2PT protocol is valid for all types of packets (untagged, tagged, and Q-in-Q tagged).



**NOTE:** VLAN translation is not compatible with L2PT. (You configure VLAN translation with the `mapping swap` statement at the [edit vlans interface] hierarchy level.)



## L2PT Basics

L2PT is enabled on a per-VLAN basis. When you enable L2PT on a VLAN, all access interfaces are considered to be customer-facing interfaces, all trunk interfaces are considered to be service provider network-facing interfaces, and the specified Layer 2 protocol is disabled on the access interfaces. L2PT acts only on logical interfaces of the family **ethernet-switching**. L2PT PDUs are flooded to all trunk and access ports within a given service VLAN.



**NOTE:** Access interfaces in an L2PT-enabled VLAN should not receive L2PT-tunneled PDUs. If an access interface does receive L2PT-tunneled PDUs, it might mean that there is a loop in the network. As a result, the interface is shut down.

You configure L2PT at the `[edit vlans vlan-name dot1q-tunneling]` hierarchy level, meaning Q-in-Q tunneling is (and must be) enabled.



**NOTE:** If you want to tunnel untagged or priority-tagged Layer 2 control PDUs, then you must configure the switch to map untagged and priority-tagged packets to an L2PT-enabled VLAN. For more information about assigning untagged and priority-tagged packets to VLANs, see [“Understanding Q-in-Q Tunneling and VLAN Translation” on page 1416](#).

### Related Documentation

- [Understanding Q-in-Q Tunneling and VLAN Translation on page 1416](#)
- [Example: Setting Up Q-in-Q Tunneling on page 1541](#)
- [Configuring Layer 2 Protocol Tunneling on page 1563](#)

## Proxy ARP

- [Understanding Proxy ARP on page 1424](#)



## Understanding Proxy ARP

You can configure proxy Address Resolution Protocol (ARP) to enable the switch to respond to ARP queries for network addresses by offering its own Ethernet media access control (MAC) address. With proxy ARP enabled, the switch captures and routes traffic to the intended destination.

Proxy ARP is useful in situations where hosts are on different physical networks and you do not want to use subnet masking. Because ARP broadcasts are not propagated between hosts on different physical networks, hosts will not receive a response to their ARP request if the destination is on a different subnet. Enabling the switch to act as an ARP proxy allows the hosts to transparently communicate with each other through the switch. Proxy ARP can help hosts on a subnet reach remote subnets without your having to configure routing or a default gateway.

- [What Is ARP? on page 1424](#)
- [Proxy ARP Overview on page 1424](#)
- [Best Practices for Proxy ARP on page 1425](#)

---

### What Is ARP?

Ethernet LANs use ARP to map Ethernet MAC addresses to IP addresses. Each device maintains a cache containing a mapping of MAC addresses to IP addresses. The switch maintains this mapping in a cache that it consults when forwarding packets to network devices. If the ARP cache does not contain an entry for the destination device, the host (the DHCP client) broadcasts an ARP request for that device's address and stores the response in the cache.

---

### Proxy ARP Overview

When proxy ARP is enabled, if the switch receives an ARP request for which it has a route to the target (destination) IP address, the switch responds by sending a proxy ARP reply packet containing its own MAC address. The host that sent the ARP request then sends its packets to the switch, which forwards them to the intended host.



**NOTE:** For security reasons, the source address in an ARP request must be on the same subnet as the interface on which the ARP request is received.

You can configure proxy ARP for each interface. You can also configure proxy ARP for a VLAN by using a routed VLAN interface (RVI).

QFX Series devices support two modes of proxy ARP, restricted and unrestricted. Both modes require that the switch have an active route to the destination address of the ARP request.

- **Restricted**—The switch responds to ARP requests in which the physical networks of the source and target are different and does not respond if the source and target IP addresses are on the same subnet. In this mode, hosts on the same subnet communicate without proxy ARP. We recommend that you use this mode on the switch.



- Unrestricted—The switch responds to all ARP requests for which it has a route to the destination. This is the default mode (because it is the default mode in Juniper Networks Junos operating system (Junos OS) configurations other than those on the switch). We recommend using restricted mode on the switch.

---

### Best Practices for Proxy ARP

We recommend these best practices for configuring proxy ARP on the switches:

- Set proxy ARP to restricted mode.
- Use restricted mode when configuring proxy ARP on RVIs.
- If you set proxy ARP to unrestricted, disable gratuitous ARP requests on each interface enabled for proxy ARP.

#### Related Documentation

- [Configuring Proxy ARP on page 1574](#)
- [proxy-arp on page 1638](#)







## CHAPTER 16

# Configuration

- [Configuration Examples on page 1427](#)
- [Private VLAN Configuration Examples on page 1510](#)
- [Q-in-Q Tunneling Configuration Example on page 1541](#)
- [Configuration Tasks on page 1544](#)
- [Private VLAN Configuration Tasks on page 1565](#)
- [Q-in-Q Tunneling Configuration Tasks on page 1571](#)
- [Proxy ARP Configuration Task on page 1574](#)
- [Configuration Statements on page 1576](#)
- [Private VLAN Configuration Statements on page 1657](#)
- [Q-in-Q Tunneling Configuration Statements on page 1662](#)

### Configuration Examples

---

- [Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428](#)
- [Example: Configuring Network Regions for VLANs with MSTP on page 1441](#)
- [Example: Configuring Reflective Relay for Use with VEPA Technology on page 1462](#)
- [Example: Setting Up Basic Bridging and a VLAN on the QFX Series on page 1467](#)
- [Example: Setting Up Bridging with Multiple VLANs on page 1476](#)
- [Example: Configuring Routing Between VLANs on One Switch on page 1481](#)
- [Example: Connecting an Access Switch to a Distribution Switch on page 1487](#)
- [Example: Configuring BPDU Protection on STP Interfaces to Prevent STP Miscalculations on page 1495](#)
- [Example: Configuring Root Protection to Enforce Root Bridge Placement in Spanning Trees on page 1499](#)
- [Example: Configuring Loop Protection to Prevent Interfaces from Transitioning from Blocking to Forwarding in a Spanning Tree on page 1504](#)
- [Example: Disabling MAC Learning on page 1508](#)
- [Example: Disabling MAC Learning in a VLAN on page 1508](#)



## Example: Configuring Faster Convergence and Improving Network Stability with RSTP

The QFX Series products use Rapid Spanning Tree Protocol (RSTP) to provide a loop-free topology. RSTP identifies certain links as point to point. When a point-to-point link fails, the alternate link can transition to the forwarding state. RSTP provides quicker reconvergence time than original STP because it uses protocol handshake messages rather than fixed timeouts. Eliminating the need to wait for timers to expire makes RSTP more efficient than STP.

This example describes how to configure RSTP on four QFX3500 switches:

- [Requirements on page 1428](#)
- [Overview and Topology on page 1428](#)
- [Configuring RSTP on Switch 1 on page 1430](#)
- [Configuring RSTP on Switch 2 on page 1432](#)
- [Configuring RSTP on Switch 3 on page 1434](#)
- [Configuring RSTP on Switch 4 on page 1437](#)
- [Verification on page 1439](#)

---

### Requirements

This example uses the following hardware and software components:

- Junos OS Release 11.1 for the QFX3500 switches
- Four QFX3500 switches


---

### Overview and Topology

In this example, QFX3500 switches are connected in the topology displayed in [Figure 29 on page 1429](#) to create a loop-free topology.



Figure 29: Network Topology for RSTP

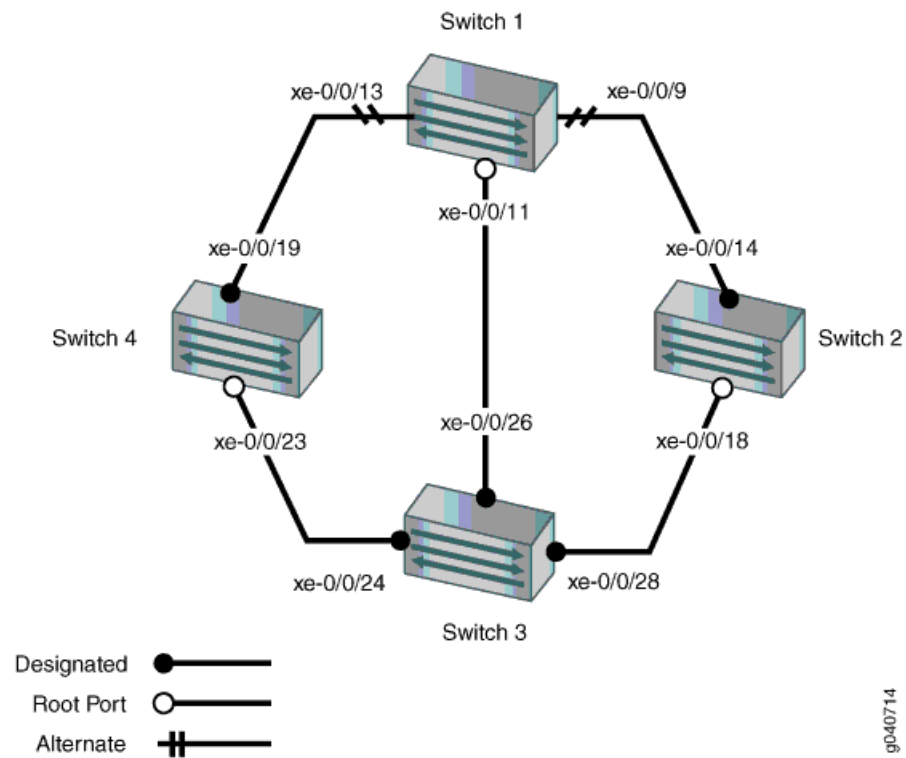

The interfaces shown in [Table 108 on page 1429](#) will be configured for RSTP.



**NOTE:** You can configure RSTP on logical or physical interfaces. This example shows RSTP configured on logical interfaces.

Table 108: Topology for Configuring RSTP on the QFX Series

| Components | Settings                                                                                                                                                                                                                                             |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Switch 1   | <p>The following ports on Switch 1 are connected in this way:</p> <ul style="list-style-type: none"> <li>• xe-0/0/9 is connected to Switch 2</li> <li>• xe-0/0/13 is connected to Switch 4</li> <li>• xe-0/0/11 is connected to Switch 3</li> </ul>  |
| Switch 2   | <p>The following ports on Switch 2 are connected in this way:</p> <ul style="list-style-type: none"> <li>• xe-0/0/14 is connected to Switch 1</li> <li>• xe-0/0/18 is connected to Switch 3</li> </ul>                                               |
| Switch 3   | <p>The following ports on Switch 3 are connected in this way:</p> <ul style="list-style-type: none"> <li>• xe-0/0/26 is connected to Switch 1</li> <li>• xe-0/0/28 is connected to Switch 2</li> <li>• xe-0/0/24 is connected to Switch 4</li> </ul> |



Table 108: Topology for Configuring RSTP on the QFX Series (*continued*)

| Components             | Settings                                                                                                                                                                                                             |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Switch 4               | <p>The following ports on Switch 4 are connected in this way:</p> <ul style="list-style-type: none"> <li>• <b>xe-0/0/19</b> is connected to Switch 1</li> <li>• <b>xe-0/0/23</b> is connected to Switch 3</li> </ul> |
| VLAN names and tag IDs | <p><b>sales-vlan</b>, tag 10</p> <p><b>engineering-vlan</b>, tag 20</p> <p><b>publications-vlan</b>, tag 30</p> <p><b>support-vlan</b>, tag 40</p>                                                                   |

This configuration example creates a loop-free topology between four switches using RSTP.

An RSTP topology contains ports that have specific roles:

- The *root port* is responsible for forwarding data to the root bridge.
- The *alternate port* is a standby port for the root port. When a root port goes down, the alternate port becomes the active root port.
- The *designated port* forwards data to the downstream network segment or device.
- The *backup port* is a backup port for the designated port. When a designated port goes down, the backup port becomes the active designated port and starts forwarding data.

### Configuring RSTP on Switch 1

#### CLI Quick Configuration

To quickly configure interfaces and RSTP on Switch 1, copy the following commands and paste them into the switch terminal window:

```
[edit]
set vlans sales-vlan description "Sales VLAN"
set vlans sales-vlan vlan-id 10
set vlans engineering-vlan description "Engineering VLAN"
set vlans engineering-vlan vlan-id 20
set vlans publications-vlan description "Publications VLAN"
set vlans publications-vlan vlan-id 30
set vlans support-vlan description "Support VLAN"
set vlans support-vlan vlan-id 40
set interfaces xe-0/0/13 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/9 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/11 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/13 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/9 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/11 unit 0 family ethernet-switching port-mode trunk
set protocols rstp bridge-priority 16k
set protocols rstp interface xe-0/0/13.0 cost 1000
set protocols rstp interface xe-0/0/13.0 mode point-to-point
set protocols rstp interface xe-0/0/9.0 cost 1000
set protocols rstp interface xe-0/0/9.0 mode point-to-point
set protocols rstp interface xe-0/0/11.0 cost 1000
set protocols rstp interface xe-0/0/11.0 mode point-to-point
```



**Step-by-Step Procedure** To configure interfaces and RSTP on Switch 1:

1. Configure the VLANs **sales-vlan**, **engineering-vlan** and **publications-vlan**, and **support-vlan**:
 

```
[edit vlans]
user@switch1# set sales-vlan description "Sales VLAN"
user@switch1# set sales-vlan vlan-id 10
user@switch1# set engineering-vlan description "Engineering VLAN"
user@switch1# set engineering-vlan vlan-id 20
user@switch1# set publications-vlan description "Publications VLAN"
user@switch1# set publications-vlan vlan-id 30
```
2. Configure the VLANs on the interfaces, including support for the Ethernet switching protocol:
 

```
[edit interfaces]
user@switch1# set xe-0/0/13 unit 0 family ethernet-switching vlan members [10 20 30 40]
user@switch1# set xe-0/0/9 unit 0 family ethernet-switching vlan members [10 20 30 40]
user@switch1# set xe-0/0/11 unit 0 family ethernet-switching vlan members [10 20 30 40]
```
3. Configure the port mode for the interfaces:
 

```
[edit interfaces]
user@switch1# set xe-0/0/13 unit 0 family ethernet-switching port-mode trunk
user@switch1# set xe-0/0/9 unit 0 family ethernet-switching port-mode trunk
user@switch1# set xe-0/0/11 unit 0 family ethernet-switching port-mode trunk
```
4. Configure RSTP on the switch:
 

```
[edit protocols]
user@switch1# rstp bridge-priority 16k
user@switch1# rstp interface xe-0/0/13.0 cost 1000
user@switch1# rstp interface xe-0/0/13.0 mode point-to-point
user@switch1# rstp interface xe-0/0/9.0 cost 1000
user@switch1# rstp interface xe-0/0/9.0 mode point-to-point
user@switch1# rstp interface xe-0/0/11.0 cost 1000
user@switch1# rstp interface xe-0/0/11.0 mode point-to-point
```

**Results** Check the results of the configuration:

```
user@switch1> show configuration
interfaces {
  xe-0/0/13 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members [10 20 30 40];
        }
      }
    }
  }
  xe-0/0/9 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members [10 20 30 40];
        }
      }
    }
  }
}
```



```
    }
  }
}
xe-0/0/11 {
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
        members [10 20 30 40];
      }
    }
  }
}
}
protocols {
  rstp {
    bridge-priority 16k;
    interface xe-0/0/13.0 {
      cost 1000;
      mode point-to-point;
    }
    interface xe-0/0/9.0 {
      cost 1000;
      mode point-to-point;
    }
    interface xe-0/0/11.0 {
      cost 1000;
      mode point-to-point;
    }
  }
}
vlands {
  sales-vlan {
    vlan-id 10;
  }
  engineering-vlan {
    vlan-id 20;
  }
  publications-vlan {
    vlan-id 30;
  }
  support-vlan {
    vlan-id 40;
  }
}
```

---

### Configuring RSTP on Switch 2

#### CLI Quick Configuration

To quickly configure interfaces and RSTP on Switch 2, copy the following commands and paste them into the switch terminal window:

```
[edit]
set vlans sales-vlan description "Sales VLAN"
set vlans sales-vlan vlan-id 10
```



```

set vlans engineering-vlan description "Engineering VLAN"
set vlans engineering-vlan vlan-id 20
set vlans publications-vlan description "Publications VLAN"
set vlans publications-vlan vlan-id 30
set vlans support-vlan description "Support VLAN"
set vlans support-vlan vlan-id 40
set interfaces xe-0/0/14 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/18 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/14 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/18 unit 0 family ethernet-switching port-mode trunk
set protocols rstp bridge-priority 32k
set protocols rstp interface xe-0/0/14.0 cost 1000
set protocols rstp interface xe-0/0/14.0 mode point-to-point
set protocols rstp interface xe-0/0/18.0 cost 1000
set protocols rstp interface xe-0/0/18.0 mode point-to-point

```

### Step-by-Step Procedure

To configure interfaces and RSTP on Switch 2:

1. Configure the VLANs `sales-vlan`, `engineering-vlan` and `publications-vlan`, and `support-vlan`:  
  

```

[edit vlans]
user@switch2# set sales-vlan description "Sales VLAN"
user@switch2# set sales-vlan vlan-id 10
user@switch2# set engineering-vlan description "Engineering VLAN"
user@switch2# set engineering-vlan vlan-id 20
user@switch2# set publications-vlan description "Publications VLAN"
user@switch2# set publications-vlan vlan-id 30
user@switch2# set support-vlan vlan-description "Support VLAN"
user@switch2# set publications-vlan vlan-id 40

```
2. Configure the VLANs on the interfaces, including support for the Ethernet switching protocol:  
  

```

[edit interfaces]
user@switch2# set xe-0/0/14 unit 0 family ethernet-switching vlan members [10 20 30 40]
user@switch2# set xe-0/0/18 unit 0 family ethernet-switching vlan members [10 20 30 40]

```
3. Configure the port mode for the interfaces:  
  

```

[edit interfaces]
user@switch2# set xe-0/0/14 unit 0 family ethernet-switching port-mode trunk
user@switch2# set xe-0/0/18 unit 0 family ethernet-switching port-mode trunk

```
4. Configure RSTP on the switch:  
  

```

[edit protocols]
user@switch2# rstp bridge-priority 32k
user@switch2# rstp interface xe-0/0/14.0 cost 1000
user@switch2# rstp interface xe-0/0/14.0 mode point-to-point
user@switch2# rstp interface xe-0/0/18.0 cost 1000
user@switch2# rstp interface xe-0/0/18.0 mode point-to-point

```

**Results** Check the results of the configuration:

```

user@switch2> show configuration
interfaces {
  xe-0/0/14 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;

```



```
        vlan {
            members [10 20 30 40];
        }
    }
}
xe-0/0/18 {
    unit 0 {
        family ethernet-switching {
            port-mode trunk;
            vlan {
                members [10 20 30 40];
            }
        }
    }
}
}
protocols {
    rstp {
        bridge-priority 32k;
        interface xe-0/0/14.0 {
            cost 1000;
            mode point-to-point;
        }
        interface xe-0/0/18.0 {
            cost 1000;
            mode point-to-point;
        }
    }
}
vlangs {
    sales-vlan {
        vlan-id 10;
    }
    engineering-vlan {
        vlan-id 20;
    }
    publications-vlan {
        vlan-id 30;
    }
    support-vlan {
        vlan-id 40;
    }
}
```

---

### Configuring RSTP on Switch 3

#### CLI Quick Configuration

To quickly configure interfaces and RSTP on Switch 3, copy the following commands and paste them into the switch terminal window:

```
[edit]
set vlans sales-vlan description "Sales VLAN"
set vlans sales-vlan vlan-id 10
set vlans engineering-vlan description "Engineering VLAN"
set vlans engineering-vlan vlan-id 20
```



```

set vlans publications-vlan description "Publications VLAN"
set vlans publications-vlan vlan-id 30
set vlans support-vlan description "Support VLAN"
set vlans support-vlan vlan-id 40
set interfaces xe-0/0/26 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/28 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/24 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/26 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/28 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/24 unit 0 family ethernet-switching port-mode trunk
set protocols rstp bridge-priority 8k
set protocols rstp interface xe-0/0/26.0 cost 1000
set protocols rstp interface xe-0/0/26.0 mode point-to-point
set protocols rstp interface xe-0/0/28.0 cost 1000
set protocols rstp interface xe-0/0/28.0 mode point-to-point
set protocols rstp interface xe-0/0/24.0 cost 1000
set protocols rstp interface xe-0/0/24.0 mode point-to-point

```

### Step-by-Step Procedure

To configure interfaces and RSTP on Switch 3:

1. Configure the VLANs `sales-vlan`, `engineering-vlan`, `publications-vlan`, and `support-vlan`:

```

[edit vlans]
user@switch3# set sales-vlan description "Sales VLAN"
user@switch3# set sales-vlan vlan-id 10
user@switch3# set engineering-vlan description "Engineering VLAN"
user@switch3# set engineering-vlan vlan-id 20
user@switch3# set publications-vlan description "Publications VLAN"
user@switch3# set publications-vlan vlan-id 30
user@switch3# set support-vlan description "Support VLAN"
user@switch3# set publications-vlan vlan-id 40

```

2. Configure the VLANs on the interfaces, including support for the Ethernet switching protocol:

```

[edit interfaces]
user@switch3# set xe-0/0/26 unit 0 family ethernet-switching vlan members [10 20 30 40]
user@switch3# set xe-0/0/28 unit 0 family ethernet-switching vlan members [10 20 30 40]
user@switch3# set xe-0/0/24 unit 0 family ethernet-switching vlan members [10 20 30 40]

```

3. Configure the port mode for the interfaces:

```

[edit interfaces]
user@switch3# set xe-0/0/26 unit 0 family ethernet-switching port-mode trunk
user@switch3# set xe-0/0/28 unit 0 family ethernet-switching port-mode trunk
user@switch3# set xe-0/0/24 unit 0 family ethernet-switching port-mode trunk

```

4. Configure RSTP on the switch:

```

[edit protocols]
user@switch3# rstp bridge-priority 8k
user@switch3# rstp interface xe-0/0/26.0 cost 1000
user@switch3# rstp interface xe-0/0/26.0 mode point-to-point
user@switch3# rstp interface xe-0/0/28.0 cost 1000
user@switch3# rstp interface xe-0/0/28.0 mode point-to-point
user@switch3# rstp interface xe-0/0/24.0 cost 1000
user@switch3# rstp interface xe-0/0/24.0 mode point-to-point

```

**Results** Check the results of the configuration:



```
user@switch3> show configuration
interfaces {
  xe-0/0/26 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members [10 20 30 40];
        }
      }
    }
  }
  xe-0/0/28 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members [10 20 30 40];
        }
      }
    }
  }
  xe-0/0/24 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members [10 20 30 40];
        }
      }
    }
  }
}
protocols {
  rstp {
    bridge-priority 8k;
    interface xe-0/0/26.0 {
      cost 1000;
      mode point-to-point;
    }
    interface xe-0/0/28.0 {
      cost 1000;
      mode point-to-point;
    }
    interface xe-0/0/24.0 {
      cost 1000;
      mode point-to-point;
    }
  }
  bridge-priority 8k;
}
vllans {
```



```

sales-vlan {
  vlan-id 10;
}
engineering-vlan {
  vlan-id 20;
}
publications-vlan {
  vlan-id 30;
}
support-vlan {
  vlan-id 40;
}
}

```

### Configuring RSTP on Switch 4

#### CLI Quick Configuration

To quickly configure interfaces and RSTP on Switch 4, copy the following commands and paste them into the switch terminal window:

```

[edit]
set vlans sales-vlan description "Sales VLAN"
set vlans sales-vlan vlan-id 10
set vlans engineering-vlan description "Engineering VLAN"
set vlans engineering-vlan vlan-id 20
set vlans publications-vlan description "Publications VLAN"
set vlans publications-vlan vlan-id 30
set vlans support-vlan description "Support VLAN"
set vlans support-vlan vlan-id 40
set interfaces xe-0/0/23 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/19 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/23 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/19 unit 0 family ethernet-switching port-mode trunk
set protocols rstp bridge-priority 16k
set protocols rstp interface xe-0/0/23.0 cost 1000
set protocols rstp interface xe-0/0/23.0 mode point-to-point
set protocols rstp interface xe-0/0/19.0 cost 1000
set protocols rstp interface xe-0/0/19.0 mode point-to-point

```

#### Step-by-Step Procedure

To configure interfaces and RSTP on Switch 4:

1. Configure the VLANs `sales-vlan`, `engineering-vlan`, `publications-vlan`, and `support-vlan`:

```

[edit vlans]
user@switch4# set sales-vlan description "Sales VLAN"
user@switch4# set sales-vlan vlan-id 10
user@switch4# set engineering-vlan description "Engineering VLAN"
user@switch4# set engineering-vlan vlan-id 20
user@switch4# set publications-vlan description "Publications VLAN"
user@switch4# set publications-vlan vlan-id 30
user@switch4# set support-vlan description "Support VLAN"
user@switch4# set publications-vlan vlan-id 40

```

2. Configure the VLANs on the interfaces, including support for the Ethernet switching protocol:

```

[edit interfaces]
user@switch4# set xe-0/0/23 unit 0 family ethernet-switching vlan members [10 20 30 40]
user@switch4# set xe-0/0/19 unit 0 family ethernet-switching vlan members [10 20 30 40]

```



3. Configure the port mode for the interfaces:

```
[edit interfaces]
user@switch4# set xe-0/0/23 unit 0 family ethernet-switching port-mode trunk
user@switch4# set xe-0/0/19 unit 0 family ethernet-switching port-mode trunk
```

4. Configure RSTP on the switch:

```
[edit protocols]
user@switch4# rstp bridge-priority 16k
user@switch4# rstp interface all cost 1000
user@switch4# rstp interface xe-0/0/23.0 cost 1000
user@switch4# rstp interface xe-0/0/23.0 mode point-to-point
user@switch4# rstp interface xe-0/0/19.0 cost 1000
user@switch4# rstp interface xe-0/0/19.0 mode point-to-point
```

**Results** Check the results of the configuration:

```
user@switch4> show configuration
interfaces {
  xe-0/0/23 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members [10 20 30 40];
        }
      }
    }
  }
  xe-0/0/19 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members [10 20 30 40];
        }
      }
    }
  }
}
protocols {
  rstp {
    bridge-priority 16k;
    interface xe-0/0/23.0 {
      cost 1000;
      mode point-to-point;
    }
    interface xe-0/0/19.0 {
      cost 1000;
      mode point-to-point;
    }
  }
}
vllans {
  sales-vlan {
    vlan-id 10;
  }
}
```



```

}
engineering-vlan {
  vlan-id 20;
}
publications-vlan {
  vlan-id 30;
}
support-vlan {
  vlan-id 40;
}
}

```

### Verification

To confirm that the configuration is working properly, perform these tasks:

- [Verifying RSTP Configuration on Switch 1 on page 1439](#)
- [Verifying RSTP Configuration on Switch 2 on page 1439](#)
- [Verifying RSTP Configuration on Switch 3 on page 1440](#)
- [Verifying RSTP Configuration on Switch 4 on page 1440](#)

#### *Verifying RSTP Configuration on Switch 1*

**Purpose** Verify that the RSTP configuration on Switch 1 is correct.

**Action** In operational mode, issue the **show spanning-tree interface** command:

```
user@switch1> show spanning-tree interface
```

Spanning tree interface parameters for instance 0

| Interface   | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|-------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/13.0 | 128:527 | 128:525               | 16384.0019e25040e0      | 1000         | BLK   | ALT  |
| xe-0/0/9.0  | 128:529 | 128:513               | 32768.0019e2503d20      | 1000         | BLK   | ALT  |
| xe-0/0/11.0 | 128:531 | 128:513               | 8192.0019e25051e0       | 1000         | FWD   | ROOT |

**Meaning** See the topology in [Figure 29 on page 1429](#). The operational mode command **show spanning-tree interface** shows that **xe-0/0/13.0** is in a forwarding state. The other interfaces on Switch 1 are blocked.

#### *Verifying RSTP Configuration on Switch 2*

**Purpose** Verify that the RSTP configuration on Switch 2 is correct.



**Action** In operational mode issue the **show spanning-tree interface** command:

```
user@switch2> show spanning-tree interface
```

Spanning tree interface parameters for instance 0

| Interface   | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|-------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/14.0 | 128:513 | 128:513               | 32768.0019e2503d20      | 1000         | BLK   | DESC |
| xe-0/0/18.0 | 128:519 | 128:515               | 8192.0019e25051e0       | 1000         | FWD   | ROOT |

**Meaning** See the topology in [Figure 29 on page 1429](#). The operational mode command **show spanning-tree interface** shows that interface **xe-0/0/18.0** is in a forwarding state and the root port. The other interface on Switch 2 is blocked.

#### *Verifying RSTP Configuration on Switch 3*

**Purpose** Verify that the RSTP configuration on Switch 3 is correct.

**Action** In operational mode, issue the **show spanning-tree interface** command:

```
user@switch3> show spanning-tree interface
```

Spanning tree interface parameters for instance 0

| Interface   | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|-------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/26.0 | 128:513 | 128:513               | 8192.0019e25051e0       | 1000         | FWD   | DESC |
| xe-0/0/28.0 | 128:515 | 128:515               | 8192.0019e25051e0       | 1000         | FWD   | DESC |
| xe-0/0/24.0 | 128:517 | 128:517               | 8192.0019e25051e0       | 1000         | FWD   | DESC |

**Meaning** See the topology in [Figure 29 on page 1429](#). The operational mode command **show spanning-tree interface** shows that no interface is the root interface.

#### *Verifying RSTP Configuration on Switch 4*

**Purpose** Verify the RSTP configuration on Switch 4.

**Action** In operational mode, issue the **show spanning-tree interface** command:

```
user@switch4> show spanning-tree interface
```

Spanning tree interface parameters for instance 0

| Interface   | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|-------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/23.0 | 128:523 | 128:517               | 8192.0019e25051e0       | 1000         | FWD   | ROOT |
| xe-0/0/19.0 | 128:525 | 128:525               | 16384.0019e25040e0      | 1000         | FWD   | DESC |

**Meaning** See the topology in [Figure 29 on page 1429](#). The operational mode command **show spanning-tree interface** shows that interface **xe-0/0/23.0** is the root interface and is in the forwarding state.



- Related Documentation**
- [Example: Configuring Network Regions for VLANs with MSTP on page 1441](#)
  - [Understanding RSTP on page 1411](#)

## Example: Configuring Network Regions for VLANs with MSTP

Multiple Spanning Tree Protocol (MSTP) is used to create a loop-free topology in networks using multiple spanning-tree regions, each region containing multiple spanning-tree instances (MSTIs). MSTIs provide different paths for different VLANs. This functionality facilitates more efficient load sharing across redundant links.

You can create up to 64 MSTI instances for QFX Series products, and each MSTI supports up to 4094 VLANs.

This example describes how to configure MSTP on four QFX3500 switches:

- [Requirements on page 1441](#)
- [Overview and Topology on page 1441](#)
- [Configuring MSTP on Switch 1 on page 1444](#)
- [Configuring MSTP on Switch 2 on page 1446](#)
- [Configuring MSTP on Switch 3 on page 1449](#)
- [Configuring MSTP on Switch 4 on page 1452](#)
- [Verification on page 1454](#)

### Requirements

---

This example uses the following hardware and software components:

- Junos OS Release 11.1 for the QFX3500 switches
- Four QFX3500 switches


### Overview and Topology

---

When the number of VLANs grows in a network, MSTP provides a more faster way of creating a loop-free topology using MSTIs. Each MSTI in the spanning-tree domain maintains its own tree. Each tree can be mapped to different links, utilizing bandwidth that would be unavailable to a single tree. MSTIs reduce demand on system resources.



Figure 30: Network Topology for MSTP

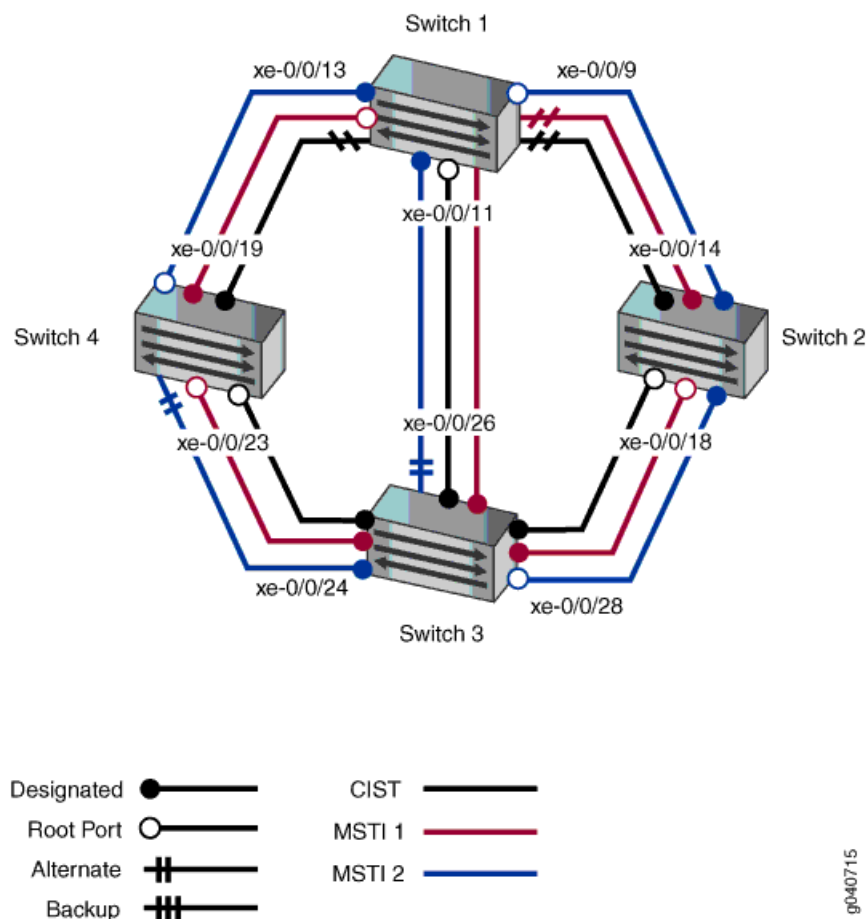

The interfaces shown in [Table 109 on page 1442](#) will be configured for MSTP.



**NOTE:** You can configure MSTP on logical or physical interfaces. This example shows MSTP configured on logical interfaces.

Table 109: Topology for Configuring MSTP on the QFX Series

| Components | Settings                                                                                                                                                                                                                                            |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Switch 1   | <p>The following ports on Switch 1 are connected in this way:</p> <ul style="list-style-type: none"> <li>• xe-0/0/9 is connected to Switch 2</li> <li>• xe-0/0/13 is connected to Switch 4</li> <li>• xe-0/0/11 is connected to Switch 3</li> </ul> |
| Switch 2   | <p>The following ports on Switch 2 are connected in this way:</p> <ul style="list-style-type: none"> <li>• xe-0/0/14 is connected to Switch 1</li> <li>• xe-0/0/18 is connected to Switch 3</li> </ul>                                              |



Table 109: Topology for Configuring MSTP on the QFX Series (*continued*)

| Components             | Settings                                                                                                                                                                                                                                                                  |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Switch 3               | <p>The following ports on Switch 3 are connected in this way:</p> <ul style="list-style-type: none"> <li>• <b>xe-0/0/26</b> is connected to Switch 1</li> <li>• <b>xe-0/0/28</b> is connected to Switch 2</li> <li>• <b>xe-0/0/24</b> is connected to Switch 4</li> </ul> |
| Switch 4               | <p>The following ports on Switch 4 are connected in this way:</p> <ul style="list-style-type: none"> <li>• <b>xe-0/0/19</b> is connected to Switch 1</li> <li>• <b>xe-0/0/23</b> is connected to Switch 3</li> </ul>                                                      |
| VLAN names and tag IDs | <p><b>sales-vlan</b>, tag 10<br/> <b>engineering-vlan</b>, tag 20<br/> <b>publications-vlan</b>, tag 30<br/> <b>support-vlan</b>, tag 40</p>                                                                                                                              |
| MSTIs                  | <p>1<br/>2</p>                                                                                                                                                                                                                                                            |

The topology in [Figure 30 on page 1442](#) shows a Common Internal Spanning Tree (CIST). The CIST is a single spanning tree connecting all devices in the network. The switch with the highest priority is elected as the root bridge of the CIST.

Also in an MSTP topology are ports that have specific roles:

- The *root port* is responsible for forwarding data to the root bridge.
- The *alternate port* is a standby port for the root port. When a root port goes down, the alternate port becomes the active root port.
- The *designated port* forwards data to the downstream network segment or device.
- The *backup port* is a backup port for the designated port. When a designated port goes down, the backup port becomes the active designated port and starts forwarding data.

In this example, one MSTP region, **region1**, contains Switch 1, Switch 2, Switch 3, and Switch 4. Within the region, four VLANs are created:

- The **sales-vlan** supports sales traffic and has a VLAN tag identifier of 10.
- The **engineering-vlan** supports data traffic and has a VLAN tag identifier of 20.
- The **publications-vlan** supports publications VLAN traffic (for supplicants that fail 802.1X authentication) and has a VLAN tag identifier of 30.
- The **support-vlan** supports video traffic and has a VLAN tag identifier of 40.

The VLANs are associated with specific interfaces on each of the four switches. Two MSTIs, 1 and 2, are then associated with the VLAN tag identifiers, and some MSTP parameters, such as cost, are configured on each switch.



## Configuring MSTP on Switch 1

**CLI Quick Configuration** To quickly configure interfaces and MSTP on Switch 1, copy the following commands and paste them into the switch terminal window:

```
[edit]
set vlans sales-vlan description "Sales VLAN"
set vlans sales-vlan vlan-id 10
set vlans engineering-vlan description "Engineering VLAN"
set vlans engineering-vlan vlan-id 20
set vlans publications-vlan description "Publications VLAN"
set vlans publications-vlan vlan-id 30
set vlans support-vlan description "Support VLAN"
set vlans support-vlan vlan-id 40
set interfaces xe-0/0/13 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/9 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/11 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/13 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/9 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/11 unit 0 family ethernet-switching port-mode trunk
set protocols mstp configuration-name region1
set protocols mstp bridge-priority 16k
set protocols mstp interface xe-0/0/13.0 cost 1000
set protocols mstp interface xe-0/0/13.0 mode point-to-point
set protocols mstp interface xe-0/0/9.0 cost 1000
set protocols mstp interface xe-0/0/9.0 mode point-to-point
set protocols mstp interface xe-0/0/11.0 cost 1000
set protocols mstp interface xe-0/0/11.0 mode point-to-point
set protocols mstp msti 1 bridge-priority 16k
set protocols mstp msti 1 vlan [10 20]
set protocols mstp msti 1 interface xe-0/0/11.0 cost 4000
set protocols mstp msti 2 bridge-priority 8k
set protocols mstp msti 2 vlan [30 40]
```

**Step-by-Step Procedure** To configure interfaces and MSTP on Switch 1:

1. Configure the VLANs `sales-vlan`, `engineering-vlan`, `publications-vlan`, and `support-vlan`:

```
[edit vlans]
user@switch1# set sales-vlan description "Sales VLAN"
user@switch1# set sales-vlan vlan-id 10
user@switch1# set engineering-vlan description "Engineering VLAN"
user@switch1# set engineering-vlan vlan-id 20
user@switch1# set publications-vlan description "Publications VLAN"
user@switch1# set publications-vlan vlan-id 30
user@switch1# set support-vlan description "Support VLAN"
user@switch1# set publications-vlan vlan-id 40
```

2. Configure the VLANs on the interfaces, including support for the Ethernet switching protocol:

```
[edit interfaces]
user@switch1# set xe-0/0/13 unit 0 family ethernet-switching vlan members [10 20 30 40]
user@switch1# set xe-0/0/9 unit 0 family ethernet-switching vlan members [10 20 30 40]
user@switch1# set xe-0/0/11 unit 0 family ethernet-switching vlan members [10 20 30 40]
```

3. Configure the port mode for the interfaces:

```
[edit interfaces]
```



```

user@switch1# set xe-0/0/13 unit 0 family ethernet-switching port-mode trunk
user@switch1# set xe-0/0/9 unit 0 family ethernet-switching port-mode trunk
user@switch1# set xe-0/0/11 unit 0 family ethernet-switching port-mode trunk
4. Configure MSTP on the switch, including the two MSTIs:

[edit protocols]
user@switch1# mstp configuration-name region1
user@switch1# mstp bridge-priority 16k
user@switch1# mstp interface xe-0/0/13.0 cost 1000
user@switch1# mstp interface xe-0/0/13.0 mode point-to-point
user@switch1# mstp interface xe-0/0/9.0 cost 1000
user@switch1# mstp interface xe-0/0/9.0 mode point-to-point
user@switch1# mstp interface xe-0/0/11.0 cost 4000
user@switch1# mstp interface xe-0/0/11.0 mode point-to-point
user@switch1# mstp msti 1 bridge-priority 16k
user@switch1# mstp msti 1 vlan [10 20]
user@switch1# mstp msti 1 interface xe-0/0/11.0 cost 4000
user@switch1# mstp msti 2 bridge-priority 8k
user@switch1# mstp msti 2 vlan [30 40]

```

**Results** Check the results of the configuration:

```

user@switch1> show configuration
interfaces {
  xe-0/0/13 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members 10;
          members 20;
          members 30;
          members 40;
        }
      }
    }
  }
  xe-0/0/9 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members 10;
          members 20;
          members 30;
          members 40;
        }
      }
    }
  }
  xe-0/0/11 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members 10;
          members 20;

```



```
        members 30;
        members 40;
    }
}
}
}
}
protocols {
    mstp {
        configuration-name region1;
        bridge-priority 16k;
        interface xe-0/0/13.0 {
            cost 1000;
            mode point-to-point;
        }
        interface xe-0/0/9.0 {
            cost 1000;
            mode point-to-point;
        }
        interface xe-0/0/11.0 {
            cost 4000;
            mode point-to-point;
        }
    }
    msti 1 {
        bridge-priority 16k;
        vlan [ 10 20 ];
        interface xe-0/0/11.0 {
            cost 4000;
        }
    }
    msti 2 {
        bridge-priority 8k;
        vlan [ 30 40 ];
    }
}
vlands {
    sales-vlan {
        vlan-id 10;
    }
    engineering-vlan {
        vlan-id 20;
    }
    publications-vlan {
        vlan-id 30;
    }
    support-vlan {
        vlan-id 40;
    }
}
```

---

### Configuring MSTP on Switch 2

#### CLI Quick Configuration

To quickly configure interfaces and MSTP on Switch 2, copy the following commands and paste them into the switch terminal window:

[edit]



```

set vlans sales-vlan description "Sales VLAN"
set vlans sales-vlan vlan-id 10
set vlans engineering-vlan description "Engineering VLAN"
set vlans engineering-vlan vlan-id 20
set vlans publications-vlan description "Publications VLAN"
set vlans publications-vlan vlan-id 30
set vlans support-vlan description "Support VLAN"
set vlans support-vlan vlan-id 40
set interfaces xe-0/0/14 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/18 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/14 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/18 unit 0 family ethernet-switching port-mode trunk
set protocols mstp configuration-name region1
set protocols mstp bridge-priority 32k
set protocols mstp interface xe-0/0/14.0 cost 1000
set protocols mstp interface xe-0/0/14.0 mode point-to-point
set protocols mstp interface xe-0/0/18.0 cost 1000
set protocols mstp interface xe-0/0/18.0 mode point-to-point
set protocols mstp msti 1 bridge-priority 32k
set protocols mstp msti 1 vlan [10 20]
set protocols mstp msti 2 bridge-priority 4k
set protocols mstp msti 2 vlan [30 40]

```

#### Step-by-Step Procedure

To configure interfaces and MSTP on Switch 2:

1. Configure the VLANs `sales-vlan`, `engineering-vlan`, `publications-vlan`, and `support-vlan`:

```

[edit vlans]
user@switch2# set sales-vlan description "Sales VLAN"
user@switch2# set sales-vlan vlan-id 10
user@switch2# set engineering-vlan description "Engineering VLAN"
user@switch2# set engineering-vlan vlan-id 20
user@switch2# set publications-vlan description "Publications VLAN"
user@switch2# set publications-vlan vlan-id 30
user@switch2# set support-vlan vlan-description "Support VLAN"
user@switch2# set publications-vlan vlan-id 40

```

2. Configure the VLANs on the interfaces, including support for the Ethernet switching protocol:

```

[edit interfaces]
user@switch2# set xe-0/0/14 unit 0 family ethernet-switching vlan members [10 20 30 40]
user@switch2# set xe-0/0/18 unit 0 family ethernet-switching vlan members [10 20 30 40]

```

3. Configure the port mode for the interfaces:

```

[edit interfaces]
user@switch2# set xe-0/0/14 unit 0 family ethernet-switching port-mode trunk
user@switch2# set xe-0/0/18 unit 0 family ethernet-switching port-mode trunk

```

4. Configure MSTP on the switch, including the two MSTIs:

```

[edit protocols]
user@switch2# mstp configuration-name region1
user@switch2# mstp bridge-priority 32k
user@switch2# mstp interface xe-0/0/14.0 cost 1000
user@switch2# mstp interface xe-0/0/14.0 mode point-to-point
user@switch2# mstp interface xe-0/0/18.0 cost 1000
user@switch2# mstp interface xe-0/0/18.0 mode point-to-point
user@switch2# mstp interface all cost 1000
user@switch2# mstp msti 1 bridge-priority 32k
user@switch2# mstp msti 1 vlan [10 20]

```



```
user@switch2# mstp msti 2 bridge-priority 4k
user@switch2# mstp msti 2 vlan [30 40]
```

**Results** Check the results of the configuration:

```
user@switch2> show configuration
interfaces {
  xe-0/0/14 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members 10;
          members 20;
          members 30;
          members 40;
        }
      }
    }
  }
  xe-0/0/18 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members 10;
          members 20;
          members 30;
          members 40;
        }
      }
    }
  }
}
protocols {
  mstp {
    configuration-name region1;
    bridge-priority 32k;
    interface xe-0/0/14.0 {
      cost 1000;
      mode point-to-point;
    }
    interface xe-0/0/18.0 {
      cost 1000;
      mode point-to-point;
    }
    msti 1 {
      bridge-priority 32k;
      vlan [ 10 20 ];
    }
    msti 2 {
      bridge-priority 4k;
      vlan [ 30 40 ];
    }
  }
}
```



```

vlangs {
  sales-vlan {
    vlan-id 10;
  }
  engineering-vlan {
    vlan-id 20;
  }
  publications-vlan {
    vlan-id 30;
  }
  support-vlan {
    vlan-id 40;
  }
}

```

### Configuring MSTP on Switch 3

#### CLI Quick Configuration

To quickly configure interfaces and MSTP on Switch 3, copy the following commands and paste them into the switch terminal window:

```

[edit]
set vlans sales-vlan description "Sales VLAN"
set vlans sales-vlan vlan-id 10
set vlans engineering-vlan description "Engineering VLAN"
set vlans engineering-vlan vlan-id 20
set vlans publications-vlan description "Publications VLAN"
set vlans publications-vlan vlan-id 30
set vlans support-vlan description "Support VLAN"
set vlans support-vlan vlan-id 40
set interfaces xe-0/0/26 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/28 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/24 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/26 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/28 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/24 unit 0 family ethernet-switching port-mode trunk
set protocols mstp configuration-name region1
set protocols mstp bridge-priority 8k
set protocols mstp interface xe-0/0/26.0 cost 1000
set protocols mstp interface xe-0/0/26.0 mode point-to-point
set protocols mstp interface xe-0/0/28.0 cost 1000
set protocols mstp interface xe-0/0/28.0 mode point-to-point
set protocols mstp interface xe-0/0/24.0 cost 1000
set protocols mstp interface xe-0/0/24.0 mode point-to-point
set protocols mstp msti 1 bridge-priority 4k
set protocols mstp msti 1 vlan [10 20]
set protocols mstp msti 2 bridge-priority 16k
set protocols mstp msti 2 vlan [30 40]

```



**Step-by-Step Procedure** To configure interfaces and MSTP on Switch 3:

1. Configure the VLANs `sales-vlan`, `engineering-vlan`, `publications-vlan`, and `support-vlan`:

```
[edit vlans]
user@switch3# set sales-vlan description "Sales VLAN"
user@switch3# set sales-vlan vlan-id 10
user@switch3# set engineering-vlan description "Engineering VLAN"
user@switch3# set engineering-vlan vlan-id 20
user@switch3# set publications-vlan description "Publications VLAN"
user@switch3# set publications-vlan vlan-id 30
user@switch3# set support-vlan description "Support VLAN"
user@switch3# set publications-vlan vlan-id 40
```

2. Configure the VLANs on the interfaces, including support for the Ethernet switching protocol:

```
[edit interfaces]
user@switch3# set xe-0/0/26 unit 0 family ethernet-switching vlan members [10 20 30 40]
user@switch3# set xe-0/0/28 unit 0 family ethernet-switching vlan members [10 20 30 40]
user@switch3# set xe-0/0/24 unit 0 family ethernet-switching vlan members [10 20 30 40]
```

3. Configure the port mode for the interfaces:

```
[edit interfaces]
user@switch3# set xe-0/0/26 unit 0 family ethernet-switching port-mode trunk
user@switch3# set xe-0/0/28 unit 0 family ethernet-switching port-mode trunk
user@switch3# set xe-0/0/24 unit 0 family ethernet-switching port-mode trunk
```

4. Configure MSTP on the switch, including the two MSTIs:

```
[edit protocols]
user@switch3# mstp configuration-name region1
user@switch3# mstp bridge-priority 8k
user@switch3# mstp interface xe-0/0/26.0 cost 1000
user@switch3# mstp interface xe-0/0/26.0 mode point-to-point
user@switch3# mstp interface xe-0/0/28.0 cost 1000
user@switch3# mstp interface xe-0/0/28.0 mode point-to-point
user@switch3# mstp interface xe-0/0/24.0 cost 1000
user@switch3# mstp interface xe-0/0/24.0 mode point-to-point
user@switch3# mstp interface all cost 1000
user@switch3# mstp msti 1 bridge-priority 4k
user@switch3# mstp msti 1 vlan [10 20]
user@switch3# mstp msti 2 bridge-priority 16k
user@switch3# mstp msti 2 vlan [30 40]
```

**Results** Check the results of the configuration:

```
user@switch3> show configuration
interfaces {
  xe-0/0/26 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members 10;
          members 20;
          members 30;
          members 40;
```







```

    }
  }
  vlans {
    sales-vlan {
      vlan-id 10;
    }
    engineering-vlan {
      vlan-id 20;
    }
    publications-vlan {
      vlan-id 30;
    }
    support-vlan {
      vlan-id 40;
    }
  }
}

```

### Configuring MSTP on Switch 4

#### CLI Quick Configuration

To quickly configure interfaces and MSTP on Switch 4, copy the following commands and paste them into the switch terminal window:

```

[edit]
set vlans sales-vlan description "Sales VLAN"
set vlans sales-vlan vlan-id 10
set vlans engineering-vlan description "Engineering VLAN"
set vlans engineering-vlan vlan-id 20
set vlans publications-vlan description "Publications VLAN"
set vlans publications-vlan vlan-id 30
set vlans support-vlan description "Support VLAN"
set vlans support-vlan vlan-id 40
set interfaces xe-0/0/23 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/19 unit 0 family ethernet-switching vlan members [10 20 30 40]
set interfaces xe-0/0/23 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/19 unit 0 family ethernet-switching port-mode trunk
set protocols mstp configuration-name region1
set protocols mstp bridge-priority 16k
set protocols mstp interface xe-0/0/23.0 cost 1000
set protocols mstp interface xe-0/0/23.0 mode point-to-point
set protocols mstp interface xe-0/0/19.0 cost 1000
set protocols mstp interface xe-0/0/19.0 mode point-to-point
set protocols mstp msti 1 bridge-priority 16k
set protocols mstp msti 1 vlan [10 20]
set protocols mstp msti 2 bridge-priority 32k
set protocols mstp msti 2 vlan [30 40]

```

#### Step-by-Step Procedure

To configure interfaces and MSTP on Switch 4:

1. Configure the VLANs `sales-vlan`, `engineering-vlan`, `publications-vlan`, and `support-vlan`:

```

[edit vlans]
user@switch4# set sales-vlan description "Sales VLAN"
user@switch4# set sales-vlan vlan-id 10
user@switch4# set engineering-vlan description "Engineering VLAN"
user@switch4# set engineering-vlan vlan-id 20
user@switch4# set publications-vlan description "Publications VLAN"
user@switch4# set publications-vlan vlan-id 30
user@switch4# set support-vlan description "Support VLAN"
user@switch4# set publications-vlan vlan-id 40

```



2. Configure the VLANs on the interfaces, including support for the Ethernet switching protocol:

```
[edit interfaces]
user@switch4# set xe-0/0/23 unit 0 family ethernet-switching vlan members [10 20 30 40]
user@switch4# set xe-0/0/19 unit 0 family ethernet-switching vlan members [10 20 30 40]
```

3. Configure the port mode for the interfaces:

```
[edit interfaces]
user@switch4# set ge-0/0/23 unit 0 family ethernet-switching port-mode trunk
user@switch4# set ge-0/0/19 unit 0 family ethernet-switching port-mode trunk
```

4. Configure MSTP on the switch, including the two MSTIs:

```
[edit protocols]
user@switch4# mstp configuration-name region1
user@switch4# mstp bridge-priority 16k
user@switch4# mstp interface all cost 1000
user@switch4# mstp interface xe-0/0/23.0 cost 1000
user@switch4# mstp interface xe-0/0/23.0 mode point-to-point
user@switch4# mstp interface xe-0/0/19.0 cost 1000
user@switch4# mstp interface xe-0/0/19.0 mode point-to-point
user@switch4# mstp msti 1 bridge-priority 16k
user@switch4# mstp msti 1 vlan [10 20]
user@switch4# mstp msti 2 bridge-priority 32k
user@switch4# mstp msti 2 vlan [30 40]
```

**Results** Check the results of the configuration:

```
user@switch4> show configuration
interfaces {
  xe-0/0/23 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members 10;
          members 20;
          members 30;
          members 40;
        }
      }
    }
  }
  xe-0/0/19 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members 10;
          members 20;
          members 30;
          members 40;
        }
      }
    }
  }
}
```



```
}
protocols {
  mstp {
    configuration-name region1;
    bridge-priority 16k;
    interface xe-0/0/23.0 {
      cost 1000;
      mode point-to-point;
    }
    interface xe-0/0/19.0 {
      cost 1000;
      mode point-to-point;
    }
    msti 1 {
      bridge-priority 16k;
      vlan [ 10 20 ];
    }
    msti 2 {
      bridge-priority 32k;
      vlan [ 30 40 ];
    }
  }
}
vlands {
  sales-vlan {
    vlan-id 10;
  }
  engineering-vlan {
    vlan-id 20;
  }
  publications-vlan {
    vlan-id 30;
  }
  support-vlan {
    vlan-id 40;
  }
}
```

---

## Verification

To confirm that the configuration is working properly, perform these tasks:

- [Verifying MSTP Configuration on Switch 1 on page 1454](#)
- [Verifying MSTP Configuration on Switch 2 on page 1456](#)
- [Verifying MSTP Configuration on Switch 3 on page 1458](#)
- [Verifying MSTP Configuration on Switch 4 on page 1460](#)

### *Verifying MSTP Configuration on Switch 1*

**Purpose** Verify the MSTP configuration on Switch 1.



**Action** Use the operational mode commands:

```
user@switch1> show spanning-tree interface
```

Spanning tree interface parameters for instance 0

| Interface   | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|-------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/13.0 | 128:527 | 128:525               | 16384.0019e25040e0      | 1000         | FWD   | ROOT |
| xe-0/0/9.0  | 128:529 | 128:513               | 32768.0019e2503d20      | 1000         | BLK   | ALT  |
| xe-0/0/11.0 | 128:531 | 128:513               | 8192.0019e25051e0       | 4000         | BLK   | ALT  |

Spanning tree interface parameters for instance 1

| Interface   | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|-------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/13.0 | 128:527 | 128:525               | 16385.0019e25040e0      | 1000         | FWD   | ROOT |
| xe-0/0/9.0  | 128:529 | 128:513               | 32769.0019e2503d20      | 1000         | BLK   | ALT  |
| xe-0/0/11.0 | 128:531 | 128:513               | 4097.0019e25051e0       | 4000         | BLK   | ALT  |

Spanning tree interface parameters for instance 2

| Interface   | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|-------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/13.0 | 128:527 | 128:527               | 8194.0019e25044e0       | 1000         | FWD   | DESG |
| xe-0/0/9.0  | 128:529 | 128:513               | 4098.0019e2503d20       | 1000         | FWD   | ROOT |
| xe-0/0/11.0 | 128:531 | 128:531               | 8194.0019e25044e0       | 1000         | FWD   | DESG |

```
user@switch1> show spanning-tree bridge
```

STP bridge parameters

```
Context ID           : 0
Enabled protocol     : MSTP
```

STP bridge parameters for CIST

```
Root ID              : 8192.00:19:e2:50:51:e0
Root cost            : 0
Root port            : xe-0/0/13.0
CIST regional root   : 8192.00:19:e2:50:51:e0
CIST internal root cost : 2000
Hello time           : 2 seconds
Maximum age          : 20 seconds
Forward delay        : 15 seconds
Hop count            : 18
Message age          : 0
Number of topology changes : 3
Time since last topology change : 921 seconds
Local parameters
  Bridge ID          : 16384.00:19:e2:50:44:e0
  Extended system ID : 0
  Internal instance ID : 0
```

STP bridge parameters for MSTI 1

```
MSTI regional root   : 4097.00:19:e2:50:51:e0
Root cost            : 2000
Root port            : xe-0/0/13.0
Hello time           : 2 seconds
Maximum age          : 20 seconds
Forward delay        : 15 seconds
Hop count            : 18
Local parameters
  Bridge ID          : 16385.00:19:e2:50:44:e0
```



```
Extended system ID          : 0
Internal instance ID        : 1

STP bridge parameters for MSTI 2
MSTI regional root          : 4098.00:19:e2:50:3d:20
Root cost                   : 1000
Root port                   : xe-0/0/9.0
Hello time                  : 2 seconds
Maximum age                 : 20 seconds
Forward delay               : 15 seconds
Hop count                   : 19
Local parameters
  Bridge ID                 : 8194.00:19:e2:50:44:e0
  Extended system ID        : 0
  Internal instance ID      : 2
```

**Meaning** The operational mode command **show spanning-tree interface** displays spanning-tree domain information such as the designated port and the port roles.

The operational mode command **show spanning-tree bridge** displays the spanning-tree domain information at either the bridge level or the interface level. If the optional interface name is omitted, all interfaces in the spanning-tree domain are displayed.

#### *Verifying MSTP Configuration on Switch 2*

**Purpose** Verify the MSTP configuration on Switch 2.



**Action** Use the operational mode commands:

```
user@switch2> show spanning-tree interface
```

Spanning tree interface parameters for instance 0

| Interface   | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|-------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/14.0 | 128:513 | 128:513               | 32768.0019e2503d20      | 1000         | FWD   | DESC |
| xe-0/0/18.0 | 128:519 | 128:515               | 8192.0019e25051e0       | 1000         | FWD   | ROOT |

Spanning tree interface parameters for instance 1

| Interface   | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|-------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/14.0 | 128:513 | 128:513               | 32769.0019e2503d20      | 1000         | FWD   | DESC |
| xe-0/0/18.0 | 128:519 | 128:515               | 4097.0019e25051e0       | 1000         | FWD   | ROOT |

Spanning tree interface parameters for instance 2

| Interface   | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|-------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/14.0 | 128:513 | 128:513               | 4098.0019e2503d20       | 1000         | FWD   | DESC |
| xe-0/0/18.0 | 128:519 | 128:519               | 4098.0019e2503d20       | 1000         | FWD   | DESC |

```
user@switch2> show spanning-tree bridge
```

STP bridge parameters

```
Context ID           : 0
Enabled protocol     : MSTP
```

STP bridge parameters for CIST

```
Root ID              : 8192.00:19:e2:50:51:e0
Root cost            : 0
Root port            : xe-0/0/18.0
CIST regional root   : 8192.00:19:e2:50:51:e0
CIST internal root cost : 1000
Hello time           : 2 seconds
Maximum age          : 20 seconds
Forward delay        : 15 seconds
Hop count            : 19
Message age          : 0
Number of topology changes : 1
Time since last topology change : 782 seconds
Local parameters
  Bridge ID          : 32768.00:19:e2:50:3d:20
  Extended system ID : 0
  Internal instance ID : 0
```

STP bridge parameters for MSTI 1

```
MSTI regional root   : 4097.00:19:e2:50:51:e0
Root cost            : 1000
Root port            : xe-0/0/18.0
Hello time           : 2 seconds
Maximum age          : 20 seconds
Forward delay        : 15 seconds
Hop count            : 19
Local parameters
  Bridge ID          : 32769.00:19:e2:50:3d:20
```



```
Extended system ID          : 0
Internal instance ID        : 1

STP bridge parameters for MSTI 2
MSTI regional root          : 4098.00:19:e2:50:3d:20
Hello time                  : 2 seconds
Maximum age                 : 20 seconds
Forward delay               : 15 seconds
Local parameters
  Bridge ID                 : 4098.00:19:e2:50:3d:20
  Extended system ID        : 0
  Internal instance ID      : 2
```

**Meaning** The operational mode command **show spanning-tree interface** displays spanning-tree domain information such as the designated port and the port roles.

The operational mode command **show spanning-tree bridge** displays the spanning-tree domain information at either the bridge level or the interface level. If the optional interface name is omitted, all interfaces in the spanning-tree domain are displayed.

#### ***Verifying MSTP Configuration on Switch 3***

**Purpose** Verify the MSTP configuration on Switch 3.



**Action** Use the operational mode commands:

```
user@switch3> show spanning-tree interface
```

Spanning tree interface parameters for instance 0

| Interface   | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|-------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/26.0 | 128:513 | 128:513               | 8192.0019e25051e0       | 1000         | FWD   | DESC |
| xe-0/0/28.0 | 128:515 | 128:515               | 8192.0019e25051e0       | 1000         | FWD   | DESC |
| xe-0/0/24.0 | 128:517 | 128:517               | 8192.0019e25051e0       | 1000         | FWD   | DESC |

Spanning tree interface parameters for instance 1

| Interface   | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|-------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/26.0 | 128:513 | 128:513               | 4097.0019e25051e0       | 1000         | FWD   | DESC |
| xe-0/0/28.0 | 128:515 | 128:515               | 4097.0019e25051e0       | 1000         | FWD   | DESC |
| xe-0/0/24.0 | 128:517 | 128:517               | 4097.0019e25051e0       | 1000         | FWD   | DESC |

Spanning tree interface parameters for instance 2

| Interface   | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|-------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/26.0 | 128:513 | 128:531               | 8194.0019e25044e0       | 1000         | BLK   | ALT  |
| xe-0/0/28.0 | 128:515 | 128:519               | 4098.0019e2503d20       | 1000         | FWD   | ROOT |
| xe-0/0/24.0 | 128:517 | 128:517               | 16386.0019e25051e0      | 1000         | FWD   | DESC |

```
user@switch3> show spanning-tree bridge
```

STP bridge parameters

```
Context ID : 0
Enabled protocol : MSTP
```

STP bridge parameters for CIST

```
Root ID : 8192.00:19:e2:50:51:e0
CIST regional root : 8192.00:19:e2:50:51:e0
CIST internal root cost : 0
Hello time : 2 seconds
Maximum age : 20 seconds
Forward delay : 15 seconds
Number of topology changes : 3
Time since last topology change : 843 seconds
Local parameters
  Bridge ID : 8192.00:19:e2:50:51:e0
  Extended system ID : 0
  Internal instance ID : 0
```

STP bridge parameters for MSTI 1

```
MSTI regional root : 4097.00:19:e2:50:51:e0
Hello time : 2 seconds
Maximum age : 20 seconds
Forward delay : 15 seconds
Local parameters
  Bridge ID : 4097.00:19:e2:50:51:e0
  Extended system ID : 0
  Internal instance ID : 1
```

STP bridge parameters for MSTI 2

```
MSTI regional root : 4098.00:19:e2:50:3d:20
```



```
Root cost           : 1000
Root port           : xe-0/0/28.0
Hello time           : 2 seconds
Maximum age          : 20 seconds
Forward delay        : 15 seconds
Hop count            : 19
Local parameters
  Bridge ID          : 16386.00:19:e2:50:51:e0
  Extended system ID : 0
  Internal instance ID : 2
```

**Meaning** The operational mode command **show spanning-tree interface** displays spanning-tree domain information such as the designated port and the port roles.

The operational mode command **show spanning-tree bridge** displays the spanning-tree domain information at either the bridge level or the interface level. If the optional interface name is omitted, all interfaces in the spanning-tree domain are displayed.

#### ***Verifying MSTP Configuration on Switch 4***

**Purpose** Verify the MSTP configuration on Switch 4.



**Action** Use the operational mode commands:

```
user@switch4> show spanning-tree interface
```

```
Spanning tree interface parameters for instance 0
```

| Interface   | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|-------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/23.0 | 128:523 | 128:517               | 8192.0019e25051e0       | 1000         | FWD   | ROOT |
| xe-0/0/19.0 | 128:525 | 128:525               | 16384.0019e25040e0      | 1000         | FWD   | DESG |

```
Spanning tree interface parameters for instance 1
```

| Interface   | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|-------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/23.0 | 128:523 | 128:517               | 4097.0019e25051e0       | 1000         | FWD   | ROOT |
| xe-0/0/19.0 | 128:525 | 128:525               | 16385.0019e25040e0      | 1000         | FWD   | DESG |

```
Spanning tree interface parameters for instance 2
```

| Interface   | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|-------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/23.0 | 128:523 | 128:517               | 16386.0019e25051e0      | 1000         | BLK   | ALT  |
| xe-0/0/19.0 | 128:525 | 128:527               | 8194.0019e25044e0       | 1000         | FWD   | ROOT |

```
user@switch4> show spanning-tree bridge
```

```
STP bridge parameters
```

```
Context ID : 0
Enabled protocol : MSTP
```

```
STP bridge parameters for CIST
```

```
Root ID : 8192.00:19:e2:50:51:e0
Root cost : 0
Root port : xe-0/0/23.0
CIST regional root : 8192.00:19:e2:50:51:e0
CIST internal root cost : 1000
Hello time : 2 seconds
Maximum age : 20 seconds
Forward delay : 15 seconds
Hop count : 19
Message age : 0
Number of topology changes : 4
Time since last topology change : 887 seconds
Local parameters
  Bridge ID : 16384.00:19:e2:50:40:e0
  Extended system ID : 0
  Internal instance ID : 0
```

```
STP bridge parameters for MSTI 1
```

```
MSTI regional root : 4097.00:19:e2:50:51:e0
Root cost : 1000
Root port : xe-0/0/23.0
Hello time : 2 seconds
Maximum age : 20 seconds
Forward delay : 15 seconds
Hop count : 19
Local parameters
  Bridge ID : 16385.00:19:e2:50:40:e0
  Extended system ID : 0
```



```
Internal instance ID           : 1

STP bridge parameters for MSTI 2
MSTI regional root            : 4098.00:19:e2:50:3d:20
Root cost                      : 2000
Root port                     : xe-0/0/19.0
Hello time                    : 2 seconds
Maximum age                   : 20 seconds
Forward delay                 : 15 seconds
Hop count                     : 18
Local parameters
  Bridge ID                   : 32770.00:19:e2:50:40:e0
  Extended system ID         : 0
  Internal instance ID       : 2
```

**Meaning** The operational mode command **show spanning-tree interface** displays spanning-tree domain information such as the designated port and the port roles.

The operational mode command **show spanning-tree bridge** displays the spanning-tree domain information at either the bridge level or the interface level. If the optional interface name is omitted, all interfaces in the spanning-tree domain are displayed.

- Related Documentation**
- [Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428](#)
  - [Understanding MSTP on page 1410](#)

### Example: Configuring Reflective Relay for Use with VEPA Technology

Reflective relay must be configured on a switch that receives virtual machine aggregated packets, such as Virtual Ethernet Port Aggregator (VEPA) packets, because some of these packets might be sent back to the server destined for another virtual machine on the same server. Reflective relay returns those packets to the original device using the same downstream port that delivered the packets to the switch.

This example shows how to configure a switch port interface to return packets sent by VEPA on the downstream interface back to the server using the same downstream interface:

- [Requirements on page 1463](#)
- [Overview and Topology on page 1463](#)
- [Configuration on page 1465](#)
- [Verification on page 1466](#)



## Requirements

---

This example uses the following hardware and software components:

- One QFX3500 switch
- One server
- Junos OS Release 12.1 or later for the QFX Series

Before you configure reflective relay on a switch port, be sure you have:

- Configured a server with six virtual machines, VM 1 through VM 6.
- Configured the server with three VLANs named VLAN\_Purple, VLAN\_Orange, and VLAN\_Blue and added two virtual machines to each VLAN.
- Configured the same three VLANs named VLAN\_Purple, VLAN\_Orange, and VLAN\_Blue on one interface.
- Installed and configured VEPA to aggregate the virtual machine packets.


## Overview and Topology

---

In this example, illustrated in [Figure 31 on page 1464](#), a switch is connected to one server that is hosting six virtual machines and is configured with a VEPA for aggregating packets. The server's six virtual machines are VM1 through VM 6, and each virtual machine belongs to one of the three server VLANs, VLAN\_Purple, VLAN\_Orange, or VLAN\_Blue. Instead of the server directly passing packets between virtual machines, packets from any of the three VLANs that are destined for another one of the three VLANs are aggregated using VEPA technology and passed to the switch for processing. You must configure the switch port to accept these aggregated packets on the downstream interface and to return appropriate packets to the server on the same downstream interface after they are processed. [Figure 31 on page 1464](#) shows the topology for this example.



Figure 31: Reflective Relay Topology

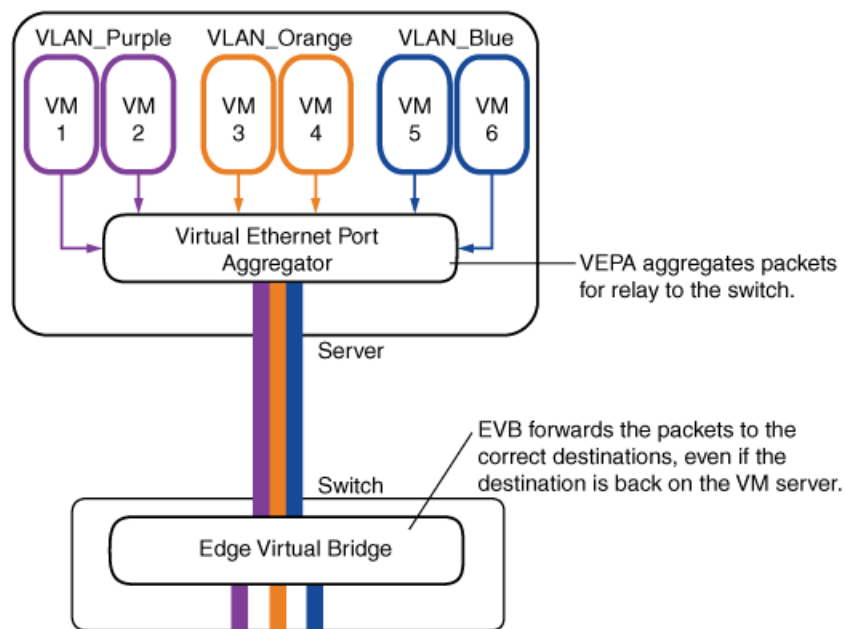

g020996

In this example, you configure the physical Ethernet switch port interface for tagged-access port mode and reflective relay. Configuring tagged-access port mode allows the interface to accept VLAN tagged packets. Configuring reflective relay allows the downstream port to return those packets on the same interface. [Table 110 on page 1464](#) shows the components used in this example.

Table 110: Components of the Topology for Configuring Reflective Relay

| Component        | Description                                                                                                                                                        |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| QFX3500 switch   | Switch that supports reflective relay. For a list of switches that support this feature, see " <a href="#">QFX Series Software Features Overview</a> " on page 15. |
| xe-0/0/2         | Switch interface to the server.                                                                                                                                    |
| Server           | Server with virtual machines and VEPA technology.                                                                                                                  |
| Virtual machines | Six virtual machines located on the server: V1, V2, V3, V4, V5, and V6.                                                                                            |
| VLANs            | Three VLANs: VLAN_Purple, VLAN_Orange, and VLAN_Blue. Each VLAN has two virtual machine members.                                                                   |
| VEPA             | Virtual Ethernet port aggregator that aggregates virtual machine packets on the server before the resulting single stream is transmitted to the switch.            |



## Configuration

To configure reflective relay, perform these tasks:

- [Configuring Reflective Relay on the Port on page 1465](#)

### Configuring Reflective Relay on the Port

#### CLI Quick Configuration

To quickly configure reflective relay, copy the following commands and paste them into the switch window:

```
[edit]
set interfaces xe-0/0/2 unit 0 family ethernet-switching port-mode tagged-access
set interfaces xe-0/0/2 unit 0 family ethernet-switching reflective-relay
set interfaces xe-0/0/2 unit 0 family ethernet-switching vlan members [VLAN_Blue VLAN_Orange VLAN_Purple]
```

#### Step-by-Step Procedure

To configure reflective relay:

1. Configure the tagged-access port mode on the interface:



**NOTE:** Configure the port mode as tagged-access otherwise you will receive an error when you commit the configuration.

```
[edit]
user@switch# set interfaces xe-0/0/2 unit 0 family ethernet-switching port-mode tagged-access
```

2. Configure reflective relay on the interface to allow it to both accept and send packets:

```
[edit]
user@switch# set interfaces xe-0/0/2 unit 0 family ethernet-switching reflective-relay
```

3. Configure the interface for the three VLANs on the server:

```
[edit]
user@switch# set interfaces xe-0/0/2 unit 0 family ethernet-switching vlan members [VLAN_Purple VLAN_Orange VLAN_Blue]
```

#### Results

Check the results of the configuration:

```
[edit interfaces xe-0/0/2]
user@switch# show
unit 0 {
  family ethernet-switching {
    port-mode tagged-access;
    reflective-relay;
    vlan {
      members [ VLAN_Purple VLAN_Orange VLAN_Blue ];
    }
  }
}
```



## Verification

---

To confirm that reflective relay is enabled and working correctly, perform these tasks:

- [Verifying That Reflective Relay Is Enabled and Working Correctly on page 1466](#)

### *Verifying That Reflective Relay Is Enabled and Working Correctly*

**Purpose** Verify that reflective relay is enabled and working correctly.

**Action** Use the **show ethernet-switching interfaces detail** command to display the reflective relay status:

```
user@switch> show ethernet-switching interfaces xe-0/0/2 detail
Interface: xe-0/0/2, Index: 66, State: down, Port mode: Tagged-access
Reflective Relay Status: Enabled
Ether type for the interface: 0x8100
VLAN membership:
  VLAN_Purple, 802.1Q Tag: 450, tagged, unblocked
  VLAN_Orange, 802.1Q Tag: 460, tagged, unblocked
  VLAN_Blue, 802.1Q Tag: 470, tagged, unblocked
Number of MACs learned on IFL: 0
```

Confirm that reflective relay is working by sending a Layer 2 broadcast message from one virtual machine to another virtual machine located on the same VLAN. Check the switch to verify that the switch sends the packets back on the same interface on which they were received. One way to check this is to set up port mirroring on the switch interface, connect a traffic generator to the mirrored interface, and use the traffic generator to examine packets.

Alternatively, if you do not have a traffic generator available, you can send traffic between two virtual machines with FTP, Telnet, or SSH, while running the **tcpdump** utility on the receiver virtual machine port to capture reflected packets.

**Meaning** The reflective relay status is **Enabled**, meaning that interface **xe-0/0/2** is configured for the tagged-access port mode, which accepts VLAN-tagged packets, and for reflective relay, which accepts and returns packets on the same interface.

When the traffic generator shows packets arriving at the switch and returning to the server on the same interface, reflective relay is working.

**Related Documentation**

- [Configuring Reflective Relay on page 1549](#)
- [Configuring Port Mirroring on page 4328](#)
- [Configuring VLANs on page 1553](#)
- [port-mode on page 1621](#)
- [reflective-relay on page 1639](#)



## Example: Setting Up Basic Bridging and a VLAN on the QFX Series

The QFX Series products use bridging and virtual LANs (VLANs) to connect network devices—storage devices, file servers, and other LAN components—in a LAN and to segment the LAN into smaller bridging domains.

To segment traffic on a LAN into separate broadcast domains, you create separate virtual LANs (VLANs) on a switch. Each VLAN is a collection of network nodes. When you use VLANs, frames whose origin and destination are in the same VLAN are forwarded only within the local VLAN, and only frames not destined for the local VLAN are forwarded to other broadcast domains. VLANs thus limit the amount of traffic flowing across the entire LAN, reducing the possible number of collisions and packet retransmissions within the LAN.

This example describes how to configure basic bridging and VLANs for the QFX Series:

- [Requirements on page 1467](#)
- [Overview and Topology on page 1467](#)
- [Configuration on page 1468](#)
- [Verification on page 1474](#)

### Requirements

This example uses the following software and hardware components:

- Junos OS Release 11.1 or later for the QFX Series
- A configured and provisioned QFX Series product

### Overview and Topology

To use a switch to connect network devices on a LAN, you must at a minimum configure bridging and VLANs. By default, bridging is enabled on all switch interfaces, all interfaces are in access mode, and all interfaces belong to a VLAN called **blue**, which is automatically configured. When you plug in access devices—such as desktop computers, file servers, printers, and wireless access points—they are joined immediately into the **blue** VLAN, and the LAN is up and running.

The topology used in this example consists of a single QFX3500 switch, with a total of 48 10-Gbps Ethernet ports. (For the purposes of this example, the QSFP+ ports Q0-Q3, which are ports xe-0/1/0 through xe-0/1/15, are excluded.) You use the ports to connect devices that have their own power sources. Table 1 details the topology used in this configuration example.

**Table 111: Components of the Basic Bridging Configuration Topology**

| Property        | Settings                                        |
|-----------------|-------------------------------------------------|
| Switch hardware | QFX 3500 switch, with 48 10-Gbps Ethernet ports |
| VLAN name       | <b>blue</b>                                     |



Table 111: Components of the Basic Bridging Configuration Topology (*continued*)

| Property                    | Settings                                                    |
|-----------------------------|-------------------------------------------------------------|
| Connections to file servers | xe-0/0/17 and xe-0/0/18                                     |
| Unused ports                | xe-0/0/0 through xe-0/0/16, and xe-0/0/19 through xe-0/0/47 |

### Configuration

#### CLI Quick Configuration

By default, after you perform the initial configuration on the switch:

- Switching is enabled on all interfaces.
- A VLAN named **blue** is created.
- All interfaces are placed into this VLAN.

You do not need to perform any other configuration on the switch to set up bridging and VLANs. To use the switch, simply connect the servers to the ports **xe-0/0/17** and **xe-0/0/18**.

#### Step-by-Step Procedure

To configure bridging and VLANs:

1. Make sure the switch is powered on.
2. Connect the two file servers to ports **xe-0/0/17** and **xe-0/0/18**.

#### Results

Check the results of the configuration:

```
[edit]
user@switch> show configuration
## Last commit: 2010-12-06 00:11:22 UTC by triumph
version 11.1;
system {
  root-authentication {
    encrypted-password "$1$urmA7AFM$x5SaGEUOdSI3u1K/iITGh1"; ## SECRET-DATA
  }
  syslog {
    user * {
      any emergency;
    }
    file messages {
      any notice;
      authorization info;
    }
    file interactive-commands {
      interactive-commands any;
    }
  }
  commit {
    factory-settings {
      reset-chassis-lcd-menu;
      reset-virtual-chassis-configuration;
```



```
    }  
  }  
}  
interfaces {  
  xe-0/0/0 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/1 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/2 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/3 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/4 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/5 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/6 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/7 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/8 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/9 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/10 {  
    unit 0 {
```



```
        family ethernet-switching;
    }
}
xe-0/0/11 {
    unit 0 {
        family ethernet-switching;
    }
}
xe-0/0/12 {
    unit 0 {
        family ethernet-switching;
    }
}
xe-0/0/13 {
    unit 0 {
        family ethernet-switching;
    }
}
xe-0/0/14 {
    unit 0 {
        family ethernet-switching;
    }
}
xe-0/0/15 {
    unit 0 {
        family ethernet-switching;
    }
}
xe-0/0/16 {
    unit 0 {
        family ethernet-switching;
    }
}
xe-0/0/17 {
    unit 0 {
        family ethernet-switching;
    }
}
xe-0/0/18 {
    unit 0 {
        family ethernet-switching;
    }
}
xe-0/0/19 {
    unit 0 {
        family ethernet-switching;
    }
}
xe-0/0/20 {
    unit 0 {
        family ethernet-switching;
    }
}
xe-0/0/21 {
    unit 0 {
        family ethernet-switching;
```



```
    }  
  }  
  xe-0/0/22 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/23 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/24 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/25 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/26 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/27 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/28 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/29 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/30 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/31 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }  
  xe-0/0/32 {  
    unit 0 {  
      family ethernet-switching;  
    }  
  }
```



```
}
xe-0/0/33 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/34 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/35 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/36 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/37 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/38 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/39 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/40 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/41 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/42 {
  unit 0 {
    family ethernet-switching;
  }
}
xe-0/0/43 {
  unit 0 {
    family ethernet-switching;
  }
}
```



```
xe-0/0/44 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/0/45 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/0/46 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/0/47 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/1/0 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/1/0 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/1/1 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/1/1 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/1/2 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
xe-0/1/3 {  
  unit 0 {  
    family ethernet-switching;  
  }  
}  
}  
protocols {  
  lldp {  
    interface all;  
  }  
}  
rstp;
```



```
}
```

## Verification

To verify that switching is operational and that a VLAN has been created, perform these tasks:

- [Verifying That the VLAN Has Been Created on page 1474](#)
- [Verifying That Interfaces Are Associated with the Proper VLANs on page 1474](#)

### *Verifying That the VLAN Has Been Created*

**Purpose** Verify that the VLAN named **blue** has been created on the switch.

**Action** List all VLANs configured on the switch:

```
user@switch> show vlans
```

| Name | Tag | Interfaces                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| blue |     | xe-0/0/0.0*, xe-0/0/1.0, xe-0/0/2.0, xe-0/0/3.0,<br>xe-0/0/4.0, xe-0/0/5.0, xe-0/0/6.0, xe-0/0/7.0,<br>xe-0/0/8.0*, xe-0/0/9.0, xe-0/0/10.0, xe-0/0/11.0*,<br>xe-0/0/12.0, xe-0/0/13.0, xe-0/0/14.0, xe-0/0/15.0,<br>xe-0/0/16.0, xe-0/0/17.0, xe-0/0/18.0, xe-0/0/19.0*,<br>xe-0/0/20.0, xe-0/0/21.0, xe-0/0/22.0, xe-0/0/23.0,<br>xe-0/0/24.0, xe-0/0/25.0, xe-0/0/26.0, xe-0/0/27.0,<br>xe-0/0/28.0, xe-0/0/29.0, xe-0/0/30.0, xe-0/0/31.0,<br>xe-0/0/32.0, xe-0/0/33.0, xe-0/0/34.0, xe-0/0/35.0,<br>xe-0/0/36.0, xe-0/0/37.0, xe-0/0/38.0, xe-0/0/39.0,<br>xe-0/0/40.0, xe-0/0/41.0, xe-0/0/42.0, xe-0/0/43.0,<br>xe-0/0/44.0, xe-0/0/45.0, xe-0/0/46.0, xe-0/0/47.0,<br>xe-0/1/0.0*, xe-0/1/1.0*, xe-0/1/2.0*, xe-0/1/3.0* |
| mgmt |     | me0.0*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

**Meaning** The **show vlans** command lists the VLANs configured on the switch. This output shows that the VLAN **blue** has been created.

### *Verifying That Interfaces Are Associated with the Proper VLANs*

**Purpose** Verify that Ethernet switching is enabled on switch interfaces and that all interfaces are included in the VLAN.



**Action** List all interfaces on which switching is enabled:

```
user@switch> show ethernet-switching interfaces
```

| Interface   | State | VLAN members | Blocking                     |
|-------------|-------|--------------|------------------------------|
| xe-0/0/0.0  | up    | blue         | unblocked                    |
| xe-0/0/1.0  | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/2.0  | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/3.0  | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/4.0  | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/5.0  | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/6.0  | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/7.0  | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/8.0  | up    | blue         | unblocked                    |
| xe-0/0/9.0  | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/10.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/11.0 | up    | blue         | unblocked                    |
| xe-0/0/12.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/13.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/14.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/15.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/16.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/17.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/18.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/19.0 | up    | blue         | unblocked                    |
| xe-0/0/20.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/21.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/22.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/23.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/24.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/25.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/26.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/27.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/28.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/29.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/30.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/31.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/32.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/33.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/34.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/35.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/36.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/37.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/38.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/39.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/40.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/41.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/42.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/43.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/44.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/45.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/46.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/0/47.0 | down  | blue         | blocked - blocked by STP/RTG |
| xe-0/1/0.0  | up    | blue         | unblocked                    |
| xe-0/1/1.0  | up    | blue         | unblocked                    |
| xe-0/1/2.0  | up    | blue         | unblocked                    |
| xe-0/1/3.0  | up    | blue         | unblocked                    |
| me0.0       | up    | mgmt         | unblocked                    |

**Meaning** The `show ethernet-switching interfaces` command lists all interfaces on which switching



is enabled (in the Interfaces column), along with the VLANs that are active on the interfaces (in the VLAN members column). Notice that the interfaces listed are the logical interfaces, not the physical interfaces. For example, the output shows **xe-0/0/0.0** instead of **xe-0/0/0**. This is because Junos OS creates VLANs on logical interfaces, not directly on physical interfaces.

**Related  
Documentation**

- [Example: Setting Up Bridging with Multiple VLANs on page 1476](#)
- [Understanding Bridging on page 1381](#)

## Example: Setting Up Bridging with Multiple VLANs

The QFX Series products use bridging and virtual LANs (VLANs) to connect network devices in a LAN—storage devices, file servers, and other network components—and to segment the LAN into smaller bridging domains.

To segment traffic on a LAN into separate broadcast domains, you create separate virtual LANs (VLANs) on a switch. Each VLAN is a collection of network nodes. When you use VLANs, frames whose origin and destination are in the same VLAN are forwarded only within the local VLAN, and only frames not destined for the local VLAN are forwarded to other broadcast domains. VLANs thus limit the amount of traffic flowing across the entire LAN, reducing the possible number of collisions and packet retransmissions within the LAN.

This example describes how to configure bridging for the QFX Series and how to create two VLANs to segment the LAN:

- [Requirements on page 1476](#)
- [Overview and Topology on page 1476](#)
- [Configuration on page 1477](#)
- [Verification on page 1479](#)

### Requirements

---

This example uses the following hardware and software components:

- A configured and provisioned QFX3500 switch
- Junos OS Release 11.1 or later for the QFX Series

### Overview and Topology

---

Switches connect all devices in an office or data center into a single LAN to provide sharing of common resources such as file servers. The default configuration creates a single VLAN, and all traffic on the switch is part of that broadcast domain. Creating separate network segments reduces the span of the broadcast domain and enables you to group related users and network resources without being limited by physical cabling or by the location of a network device in the building or on the LAN.

This example shows a simple configuration to illustrate the basic steps for creating two VLANs on a single switch. One VLAN, called **sales**, is for the sales and marketing group,



and a second, called **support**, is for the customer support team. The sales and support groups each have their own dedicated file servers and other resources. For the switch ports to be segmented across the two VLANs, each VLAN must have its own broadcast domain, identified by a unique name and tag (VLAN ID). In addition, each VLAN must be on its own distinct IP subnet.

The topology used in this example consists of a single QFX3500 switch, with a total of 48 10-Gbps Ethernet ports. (For the purposes of this example, the QSFP+ ports Q0-Q3, which are ports xe-0/1/0 through xe-0/1/15, are excluded.)

**Table 112: Components of the Multiple VLAN Topology**

| Property                          | Settings                                                                                                                                             |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Switch hardware                   | QFX3500 switch configured with 48 10-Gbps Ethernet ports (xe-0/0/0 through xe-0/0/47)                                                                |
| VLAN names and tag IDs            | <b>sales</b> , tag 100<br><b>support</b> , tag 200                                                                                                   |
| VLAN subnets                      | <b>sales</b> : 192.0.2.0/25 (addresses 192.0.2.1 through 192.0.2.126)<br><b>support</b> : 192.0.2.128/25 (addresses 192.0.2.129 through 192.0.2.254) |
| Interfaces in VLAN <b>sales</b>   | File servers: xe-0/0/20 and xe-0/0/21                                                                                                                |
| Interfaces in VLAN <b>support</b> | File servers: xe-0/0/46 and xe-0/0/47                                                                                                                |
| Unused interfaces                 | xe-0/0/2 and xe-0/0/25                                                                                                                               |

This configuration example creates two IP subnets, one for the sales VLAN and the second for the support VLAN. The switch bridges traffic within a VLAN. For traffic passing between two VLANs, the switch routes the traffic using a Layer 3 routing interface on which you have configured the address of the IP subnet.

To keep the example simple, the configuration steps show only a few devices in each of the VLANs. Use the same configuration procedure to add more LAN devices.

### Configuration

#### CLI Quick Configuration

To quickly configure Layer 2 switching for the two VLANs (**sales** and **support**) and to quickly configure Layer 3 routing of traffic between the two VLANs, copy the following commands and paste them into the switch terminal window:

```
[edit]
set interfaces xe-0/0/0 unit 0 family ethernet-switching vlan members sales
set interfaces xe-0/0/3 unit 0 family ethernet-switching vlan members sales
set interfaces xe-0/0/22 unit 0 family ethernet-switching vlan members sales
set interfaces xe-0/0/20 unit 0 description "Sales file server port"
set interfaces xe-0/0/20 unit 0 family ethernet-switching vlan members sales
set interfaces xe-0/0/24 unit 0 family ethernet-switching vlan members support
set interfaces xe-0/0/26 unit 0 family ethernet-switching vlan members support
set interfaces xe-0/0/44 unit 0 family ethernet-switching vlan members support
set interfaces xe-0/0/46 unit 0 description "Support file server port"
```



```

set interfaces xe-0/0/46 unit 0 family ethernet-switching vlan members support
set interfaces vlan unit 0 family inet address 192.0.2.0/25
set interfaces vlan unit 1 family inet address 192.0.2.128/25
set vlans sales l3-interface vlan.0
set vlans sales vlan-id 100
set vlans support vlan-id 200
set vlans support l3-interface vlan.1

```

**Step-by-Step Procedure** Configure the switch interfaces and the VLANs to which they belong. By default, all interfaces are in access mode, so you do not have to configure the port mode.

1. Configure the interface for the file server in the **sales** VLAN:  

```

[edit interfaces xe-0/0/20 unit 0]
user@switch# set description "Sales file server port"
user@switch# set family ethernet-switching vlan members sales

```
2. Configure the interface for the file server in the **support** VLAN:  

```

[edit interfaces xe-0/0/46 unit 0]
user@switch# set description "Support file server port"
user@switch# set family ethernet-switching vlan members support

```
3. Create the subnet for the **sales** broadcast domain:  

```

[edit interfaces]
user@switch# set vlan unit 0 family inet address 192.0.2.1/25

```
4. Create the subnet for the **support** broadcast domain:  

```

[edit interfaces]
user@switch# set vlan unit 1 family inet address 192.0.2.129/25

```
5. Configure the VLAN tag IDs for the **sales** and **support** VLANs:  

```

[edit vlans]
user@switch# set sales vlan-id 100
user@switch# set support vlan-id 200

```
6. To route traffic between the **sales** and **support** VLANs, define the interfaces that are members of each VLAN and associate a Layer 3 interface:  

```

[edit vlans]
user@switch# set sales l3-interface vlan.0
user@switch# set support l3-interface vlan.1

```

Display the results of the configuration:

```

user@switch> show configuration
interfaces {
  xe-0/0/20 {
    unit 0 {
      description "Sales file server port";
      family ethernet-switching {
        vlan members sales;
      }
    }
  }
  xe-0/0/46 {
    unit 0 {
      description "Support file server port";
      family ethernet-switching {
        vlan members support;
      }
    }
  }
}

```



```

    }
    vlans {
        unit 0 {
            family inet address 192.0.2.1/25;
        }
        unit 1 {
            family inet address 192.0.2.129/25;
        }
    }
}
}
vlans {
    sales {
        vlan-id 100;
        interface xe-0/0/0.0;
        interface xe-0/0/3.0;
        interface xe-0/0/20.0;
        interface xe-0/0/22.0;
        l3-interface vlan 0;
    }
    support {
        vlan-id 200;
        interface xe-0/0/24.0;
        interface xe-0/0/26.0;
        interface xe-0/0/44.0;
        interface xe-0/0/46.0;
        l3-interface vlan 1;
    }
}
}

```



**TIP:** To quickly configure the sales and support VLAN interfaces, issue the `load merge terminal` command. Then copy the hierarchy and paste it into the switch terminal window.

## Verification

Verify that the **sales** and **support** VLANs have been created and are operating properly, perform these tasks:

- [Verifying That the VLANs Have Been Created and Associated with the Correct Interfaces on page 1479](#)
- [Verifying That Traffic Is Being Routed Between the Two VLANs on page 1480](#)
- [Verifying That Traffic Is Being Switched Between the Two VLANs on page 1480](#)

### *Verifying That the VLANs Have Been Created and Associated with the Correct Interfaces*

**Purpose** Verify that the **sales** and **support** VLANs have been created on the switch and that all connected interfaces on the switch are members of the correct VLAN.



**Action** To list all VLANs configured on the switch, use the **show vlans** command:

```
user@switch> show vlans
Name      Tag      Interfaces
default
xe-0/0/1.0, xe-0/0/2.0, xe-0/0/4.0, xe-0/0/5.0,
xe-0/0/6.0, xe-0/0/7.0, xe-0/0/8.0, xe-0/0/9.0,
xe-0/0/10.0*, xe-0/0/11.0, xe-0/0/12.0, xe-0/0/13.0*,
xe-0/0/14.0, xe-0/0/15.0, xe-0/0/16.0, xe-0/0/17.0,
xe-0/0/18.0, xe-0/0/19.0, xe-0/0/21.0, xe-0/0/23.0*,
xe-0/0/25.0, xe-0/0/27.0, xe-0/0/28.0, xe-0/0/29.0,
xe-0/0/30.0, xe-0/0/31.0, xe-0/0/32.0, xe-0/0/33.0,
xe-0/0/34.0, xe-0/0/35.0, xe-0/0/36.0, xe-0/0/37.0,
xe-0/0/38.0, xe-0/0/39.0, xe-0/0/40.0, xe-0/0/41.0,
xe-0/0/42.0, xe-0/0/43.0, xe-0/0/45.0, xe-0/0/47.0,
xe-0/1/0.0*, xe-0/1/1.0*, xe-0/1/2.0*, xe-0/1/3.0*

sales      100
xe-0/0/0.0*, xe-0/0/3.0, xe-0/0/20.0, xe-0/0/22.0

support     200
xe-0/0/0.24, xe-0/0/26.0, xe-0/0/44.0, xe-0/0/46.0*

mgmt
me0.0*
```

**Meaning** The **show vlans** command lists all VLANs configured on the switch and which interfaces are members of each VLAN. This command output shows that the **sales** and **support** VLANs have been created. The **sales** VLAN has a tag ID of 100 and is associated with interfaces **xe-0/0/0.0**, **xe-0/0/3.0**, **xe-0/0/20.0**, and **xe-0/0/22.0**. VLAN **support** has a tag ID of 200 and is associated with interfaces **xe-0/0/24.0**, **xe-0/0/26.0**, **xe-0/0/44.0**, and **xe-0/0/46.0**.

#### *Verifying That Traffic Is Being Routed Between the Two VLANs*

**Purpose** Verify routing between the two VLANs.

**Action** List the Layer 3 routes in the switch Address Resolution Protocol (ARP) table:

```
user@switch> show arp
MAC Address      Address      Name      Flags
00:00:0c:06:2c:0d 192.0.2.3    vlan.0    None
00:13:e2:50:62:e0 192.0.2.11   vlan.1    None
```

**Meaning** Sending IP packets on a multiaccess network requires mapping from an IP address to a MAC address (the physical or hardware address). The ARP table displays the mapping between the IP address and MAC address for both **vlan.0** (associated with **sales**) and **vlan.1** (associated with **support**). These VLANs can route traffic to each other.

#### *Verifying That Traffic Is Being Switched Between the Two VLANs*

**Purpose** Verify that learned entries are being added to the Ethernet switching table.



**Action** List the contents of the Ethernet switching table:

```
user@switch> show ethernet-switching table
```

```
Ethernet-switching table: 8 entries, 5 learned
```

| VLAN    | MAC address       | Type  | Age | Interfaces    |
|---------|-------------------|-------|-----|---------------|
| default | *                 | Flood |     | - All-members |
| default | 00:00:05:00:00:01 | Learn |     | - xe-0/0/10.0 |
| default | 00:00:5e:00:01:09 | Learn |     | - xe-0/0/13.0 |
| default | 00:19:e2:50:63:e0 | Learn |     | - xe-0/0/23.0 |
| sales   | *                 | Flood |     | - All-members |
| sales   | 00:00:5e:00:07:09 | Learn |     | - xe-0/0/0.0  |
| support | *                 | Flood |     | - All-members |
| support | 00:00:5e:00:01:01 | Learn |     | - xe-0/0/46.0 |

**Meaning** The output shows that learned entries for the **sales** and **support** VLANs have been added to the Ethernet switching table, and are associated with interfaces **xe-0/0/0.0** and **xe-0/0/46.0**. Even though the VLANs were associated with more than one interface in the configuration, these interfaces are the only ones that are currently operating.

**Related Documentation**

- [Example: Setting Up Basic Bridging and a VLAN on the QFX Series on page 1467](#)
- [Understanding Bridging on page 1381](#)

## Example: Configuring Routing Between VLANs on One Switch

To segment traffic on a LAN into separate broadcast domains, you create separate virtual LANs (VLANs). For example, you might want to create a VLAN that includes the employees in a department and the resources that they use often, such as printers, servers, and so on.

Of course, you also want to allow these employees to communicate with people and resources in other VLANs. To forward packets between VLANs you normally you need a router that connects the VLANs. However, you can accomplish this on a Juniper Networks switch without using a router by configuring a routed VLAN interface (RVI). Using this approach reduces complexity and avoids the costs associated with purchasing, installing, managing, powering, and cooling another device.

- [Requirements on page 1481](#)
- [Overview and Topology on page 1482](#)
- [Configure Layer 2 switching for two VLANs on page 1483](#)
- [Verification on page 1485](#)

### Requirements

This example uses the following hardware and software components:


- One switch
- Junos OS Release 11.1 or later



## Overview and Topology

This example uses an RVI to route traffic between two VLANs on the same switch. The topology is shown in [Figure 32 on page 1482](#).

**Figure 32: RVI with One Switch**

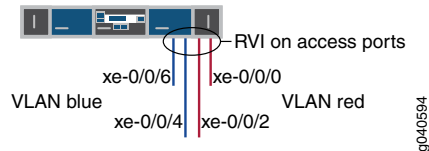

This example shows a simple configuration to illustrate the basic steps for creating two VLANs on a single switch and configuring an RVI to enable routing between the VLANs. One VLAN, called **blue**, is for the sales and marketing group, and a second, called **red**, is for the customer support team. The sales and support groups each have their own file servers and wireless access points. Each VLAN must have a unique name, tag (VLAN ID), and distinct IP subnet. [Table 113 on page 1482](#) lists the components of the sample topology.

**Table 113: Components of the Multiple VLAN Topology**

| Property                       | Settings                                                                                                                                        |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| VLAN names and tag IDs         | <b>blue</b> , ID 100<br><b>red</b> , ID 200                                                                                                     |
| Subnets associated with VLANs  | <b>blue</b> : 192.0.2.0/25 (addresses 192.0.2.1 through 192.0.2.126)<br><b>red</b> : 192.0.2.128/25 (addresses 192.0.2.129 through 192.0.2.254) |
| Interfaces in VLAN <b>blue</b> | Sales server port: <b>xe-0/0/4</b><br>Sales wireless access points: <b>xe-0/0/6</b>                                                             |
| Interfaces in VLAN <b>red</b>  | Support server port: <b>xe-0/0/0</b><br>Support wireless access points: <b>xe-0/0/2</b>                                                         |
| RVI name                       | interface <b>vlan</b>                                                                                                                           |
| RVI units and addresses        | logical unit 100: <b>192.0.2.1/25</b><br>logical unit 200: <b>192.0.2.129/25</b>                                                                |

This configuration example creates two IP subnets, one for the blue VLAN and the second for the red VLAN. The switch bridges traffic within the VLANs. For traffic passing between two VLANs, the switch routes the traffic using an RVI on which you have configured addresses in each IP subnet.

To keep the example simple, the configuration steps show only a few interfaces and VLANs. Use the same configuration procedure to add more interfaces and VLANs. By default, all interfaces are in access mode, so you do not have to configure the port mode.



### Configure Layer 2 switching for two VLANs

**CLI Quick Configuration** To quickly configure Layer 2 switching for the two VLANs (**blue** and **red**) and to quickly configure Layer 3 routing of traffic between the two VLANs, copy the following commands and paste them into the switch terminal window:

```
[edit]
set interfaces xe-0/0/4 unit 0 description "Sales server port"
set interfaces xe-0/0/4 unit 0 family ethernet-switching vlan members blue
set interfaces xe-0/0/6 unit 0 description "Sales wireless access point port"
set interfaces xe-0/0/6 unit 0 family ethernet-switching vlan members blue
set interfaces xe-0/0/0 unit 0 description "Support servers"
set interfaces xe-0/0/0 unit 0 family ethernet-switching vlan members red
set interfaces xe-0/0/2 unit 0 description "Support wireless access point port"
set interfaces xe-0/0/2 unit 0 family ethernet-switching vlan members red
set interfaces vlan unit 100 family inet address 192.0.2.1/25
set interfaces vlan unit 200 family inet address 192.0.2.129/25
set vlans blue l3-interface vlan.100
set vlans blue vlan-id 100
set vlans red vlan-id 200
set vlans red l3-interface vlan.200
```

**Step-by-Step Procedure** To configure the switch interfaces and the VLANs to which they belong:

1. Configure the interface for the sales server in the blue VLAN:  

```
[edit interfaces xe-0/0/4 unit 0]
user@switch# set description "Sales server port"
user@switch# set family ethernet-switching vlan members blue
```
2. Configure the interface for the wireless access point in the blue VLAN:  

```
[edit interfaces xe-0/0/6 unit 0]
user@switch# set description "Sales wireless access point port"
user@switch# set family ethernet-switching vlan members blue
```
3. Configure the interface for the support server in the red VLAN:  

```
[edit interfaces xe-0/0/0 unit 0]
user@switch# set description "Support server port"
user@switch# set family ethernet-switching vlan members red
```
4. Configure the interface for the wireless access point in the red VLAN:  

```
[edit interfaces xe-0/0/2 unit 0]
user@switch# set description "Support wireless access point port"
user@switch# set family ethernet-switching vlan members red
```

**Step-by-Step Procedure** Now create the VLANs and the RVI. The RVI will have logical units in the broadcast domains of both VLANs.

1. Create the red and blue VLANs by configuring the VLAN IDs for them:  

```
[edit vlans]
user@switch# set blue vlan-id 100
user@switch# set red vlan-id 200
```
2. Create the interface named **vlan** with a logical unit in the sales broadcast domain (blue VLAN):  

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 192.0.2.1/25
```



The unit number is arbitrary and does not have to match the VLAN tag ID. However, configuring the unit number to match the VLAN ID can help avoid confusion.

3. Add a logical unit in the support broadcast domain (red VLAN) to the **vlan** interface:

```
[edit interfaces]
user@switch# set vlan unit 200 family inet address 192.0.2.129/25
```

4. Complete the RVI configuration by binding the red and blue VLANs (Layer 2) with the appropriate logical units of the **vlan** interface (Layer 3):

```
[edit vlans]
user@switch# set blue l3-interface vlan.100
user@switch# set red l3-interface vlan.200
```

Display the results of the configuration:

```
user@switch> show configuration
interfaces {
  xe-0/0/4 {
    unit 0 {
      description "Sales server port";
      family ethernet-switching {
        vlan members blue;
      }
    }
  }
  xe-0/0/6 {
    unit 0 {
      description "Sales wireless access point port";
      family ethernet-switching {
        vlan members blue;
      }
    }
  }
  xe-0/0/0 {
    unit 0 {
      description "Support server port";
      family ethernet-switching {
        vlan members red;
      }
    }
  }
  xe-0/0/2 {
    unit 0 {
      description "Support wireless access point port";
      family ethernet-switching {
        vlan members red;
      }
    }
  }
  vlan {
    unit 100 {
      family inet address 192.0.2.1/25;
    }
    unit 200 {
      family inet address 192.0.2.129/25;
    }
  }
}
```



```

    }
  }
}
vllans {
  blue {
    vlan-id 100;
    interface xe-0/0/4.0;
    interface xe-0/0/6.0;
    l3-interface vlan 100;
  }
  red {
    vlan-id 200;
    interface xe-0/0/0.0;
    interface xe-0/0/2.0;
    l3-interface vlan 200;
  }
}
}

```



**TIP:** To quickly configure the blue and red VLAN interfaces, issue the **load merge terminal** command, copy the hierarchy, and paste it into the switch terminal window.

## Verification

To verify that the **blue** and **red** VLANs have been created and are operating properly, perform these tasks:

- [Verifying That the VLANs Have Been Created and Associated with the Correct Interfaces on page 1485](#)
- [Verifying That Traffic Can Be Routed Between the Two VLANs on page 1486](#)

### *Verifying That the VLANs Have Been Created and Associated with the Correct Interfaces*

**Purpose** Verify that the VLANs **blue** and **red** have been created on the switch and that all connected interfaces on the switch are members of the correct VLAN.

**Action** List all VLANs configured on the switch:

```

user@switch> show vlans
Name      Tag      Interfaces
default   100      xe-0/0/0.0, xe-0/0/2.0, xe-0/0/4.0, xe-0/0/6.0,
blue      100      xe-0/0/4.0, xe-0/0/6,
red       200      xe-0/0/0.0, xe-0/0/2.0, *
mgmt      me0.0*

```

**Meaning** The **show vlans** command lists all VLANs configured on the switch and which interfaces are members of each VLAN. This command output shows that the **blue** and **red** VLANs have been created. The **blue** VLAN has a tag ID of 100 and is associated with interfaces



**xe-0/0/4.0** and **xe-0/0/6.0**. VLAN **red** has a tag ID of 200 and is associated with interfaces **xe-0/0/0.0** and **xe-0/0/2.0**.

### *Verifying That Traffic Can Be Routed Between the Two VLANs*

**Purpose** Verify routing between the two VLANs.

**Action** Verify that the RVI logical units are up:

```
user@switch> show interfaces terse
vlan.100          up    up    inet    192.0.2.1/25
vlan.200          up    up    inet    192.0.2.129/25
```



**NOTE:** At least one port (access or trunk) with an appropriate VLAN assigned to it must be up for the vlan interface to be up.

Verify that switch has created routes that use the RVI logical units:

```
user@switch> show route
192.0.2.0/25      *[Direct/0] 1d 03:26:45
                  > via vlan.100
192.0.2.1/32      *[Local/0] 1d 03:26:45
                  Local via vlan.100
192.0.2.128/25    *[Direct/0] 1d 03:26:45
                  > via vlan.200
192.0.2.129/32    *[Local/0] 1d 03:26:45
                  Local via vlan.200
```

List the Layer 3 routes in the switch's Address Resolution Protocol (ARP) table:

```
user@switch> show arp
```

| MAC Address       | Address     | Name     | Flags |
|-------------------|-------------|----------|-------|
| 00:00:0c:06:2c:0d | 192.0.2.7   | vlan.100 | None  |
| 00:13:e2:50:62:e0 | 192.0.2.132 | vlan.200 | None  |

**Meaning** The output of the **show interfaces** and **show route** commands show that the Layer 3 RVI logical units are working and the switch has used them to create direct routes that it will use to forward traffic between the VLAN subnets. The **show arp** command displays the mappings between the IP addresses and MAC addresses for devices on both **vlan.100** (associated with VLAN **blue**) and **vlan.200** (associated with VLAN **red**). These two devices can communicate.

**Related Documentation**

- [Understanding Routed VLAN Interfaces on page 1386](#)
- [I3-interface on page 1607](#)



## Example: Connecting an Access Switch to a Distribution Switch

In large local area networks (LANs), you commonly need to aggregate traffic from a number of access switches into a distribution switch.

This example describes how to connect an access switch to a distribution switch:

- [Requirements on page 1487](#)
- [Overview and Topology on page 1487](#)
- [Configuring the Access Switch on page 1488](#)
- [Configuring the Distribution Switch on page 1492](#)
- [Verification on page 1494](#)

### Requirements

This example uses the following hardware and software components:

- For the distribution switch, one EX 4200-24F switch. This model is designed to be used as a distribution switch for aggregation or collapsed core network topologies and in space-constrained data centers. It has twenty-four 1-Gigabit Ethernet fiber SFP ports and an EX-UM-2XFP uplink module with two 10-Gigabit Ethernet XFP ports.
- For the access switch, one EX 3200-24P, which has twenty-four 1-Gigabit Ethernet ports, all of which support Power over Ethernet (PoE), and an uplink module with four 1-Gigabit Ethernet ports.
- Junos OS Release 11.1 or later for the QFX Series

### Overview and Topology

In a large office that is spread across several floors or buildings, or in a data center, you commonly aggregate traffic from a number of access switches into a distribution switch. This configuration example shows a simple topology to illustrate how to connect a single access switch to a distribution switch.

In the topology, the LAN is segmented into two VLANs, one for the sales department and the second for the support team. One 1-Gigabit Ethernet port on the access switch's uplink module connects to the distribution switch, to one 1-Gigabit Ethernet port on the distribution switch.

[Table 114 on page 1487](#) explains the components of the example topology. The example shows how to configure one of the three access switches. The other access switches could be configured in the same manner.

**Table 114: Components of the Topology for Connecting an Access Switch to a Distribution Switch**

| Property               | Settings                                                                                                                                                         |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Access switch hardware | EX 3200-24P, 24 1-Gigabit Ethernet ports, all PoE-enabled ( <b>ge-0/0/0</b> through <b>ge-0/0/23</b> ); one 4-port 1-Gigabit Ethernet uplink module (EX-UM-4SFP) |



**Table 114: Components of the Topology for Connecting an Access Switch to a Distribution Switch** (*continued*)

|                                                                  |                                                                                                                                                                                                                               |
|------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Distribution switch hardware                                     | EX 4200-24F, 24 1-Gigabit Ethernet fiber SPF ports ( <b>ge-0/0/0</b> through <b>ge-0/0/23</b> ); one 2-port 10-Gigabit Ethernet XFP uplink module (EX-UM-4SFP)                                                                |
| VLAN names and tag IDs                                           | <b>sales</b> , tag 100 <b>support</b> , tag 200                                                                                                                                                                               |
| VLAN subnets                                                     | <b>sales</b> : 192.0.2.0/25 (addresses 192.0.2.1 through 192.0.2.126) <b>support</b> : 192.0.2.128/25 (addresses 192.0.2.129 through 192.0.2.254)                                                                             |
| Trunk port interfaces                                            | On the access switch: <b>ge-0/1/0</b> On the distribution switch: <b>ge-0/0/0</b>                                                                                                                                             |
| Access port interfaces in VLAN <b>sales</b> (on access switch)   | Avaya IP telephones: <b>ge-0/0/3</b> through <b>ge-0/0/19</b> Wireless access points: <b>ge-0/0/0</b> and <b>ge-0/0/1</b> Printers: <b>ge-0/0/22</b> and <b>ge-0/0/23</b> File servers: <b>ge-0/0/20</b> and <b>ge-0/0/21</b> |
| Access port interfaces in VLAN <b>support</b> (on access switch) | Avaya IP telephones: <b>ge-0/0/25</b> through <b>ge-0/0/43</b> Wireless access points: <b>ge-0/0/24</b> Printers: <b>ge-0/0/44</b> and <b>ge-0/0/45</b> File servers: <b>ge-0/0/46</b> and <b>ge-0/0/47</b>                   |
| Unused interfaces on access switch                               | <b>ge-0/0/2</b> and <b>ge-0/0/25</b>                                                                                                                                                                                          |

### Configuring the Access Switch

To configure the access switch:

#### CLI Quick Configuration

To quickly configure the access switch, copy the following commands and paste them into the switch terminal window:

```
[edit]
set interfaces ge-0/0/0 unit 0 description "Sales Wireless access point port"
set interfaces ge-0/0/0 unit 0 family ethernet-switching vlan members sales
set interfaces ge-0/0/3 unit 0 description "Sales phone port"
set interfaces ge-0/0/3 unit 0 family ethernet-switching vlan members sales
set interfaces ge-0/0/22 unit 0 description "Sales printer port"
set interfaces ge-0/0/22 unit 0 family ethernet-switching vlan members sales
set interfaces ge-0/0/20 unit 0 description "Sales file server port"
set interfaces ge-0/0/20 unit 0 family ethernet-switching vlan members sales
set interfaces ge-0/0/24 unit 0 description "Support wireless access point port"
set interfaces ge-0/0/24 unit 0 family ethernet-switching vlan members support
set interfaces ge-0/0/26 unit 0 description "Support phone port"
set interfaces ge-0/0/26 unit 0 family ethernet-switching vlan members support
set interfaces ge-0/0/44 unit 0 description "Support printer port"
set interfaces ge-0/0/44 unit 0 family ethernet-switching vlan members support
set interfaces ge-0/0/46 unit 0 description "Support file server port"
set interfaces ge-0/0/46 unit 0 family ethernet-switching vlan members support
set interfaces ge-0/1/0 unit 0 description "Uplink module port connection to distribution switch"
set interfaces ge-0/1/0 unit 0 family ethernet-switching port-mode trunk
set interfaces ge-0/1/0 unit 0 family ethernet-switching native-vlan-id 1
set interfaces ge-0/1/0 unit 0 family ethernet-switching vlan members [sales support]
set interfaces vlan unit 0 family inet address 192.0.2.1/25
set interfaces vlan unit 1 family inet address 192.0.2.129/25
set vlans sales interface ge-0/0/0.0
set vlans sales interface ge-0/0/3.0
set vlans sales interface ge-0/0/22.0
set vlans sales interface ge-0/0/20.0
```



```

set vlans sales l3-interface vlan.0
set vlans sales vlan-id 100
set vlans sales vlan-description "Sales VLAN"
set vlans support interface ge-0/0/24.0
set vlans support interface ge-0/0/26.0
set vlans support interface ge-0/0/44.0
set vlans support interface ge-0/0/46.0
set vlans support vlan-id 200
set vlans support l3-interface vlan.1
set vlans support vlan-description "Support VLAN"

```

### Step-by-Step Procedure

To configure the access switch:

1. Configure the 1-Gigabit Ethernet interface on the uplink module to be the trunk port that connects to the distribution switch:
 

```
[edit interfaces ge-0/1/0 unit 0]user@access-switch# set description "Uplink module port connection to distribution switch"
user@access-switch# set ethernet-switching port-mode trunk
```
2. Specify the VLANs to be aggregated on the trunk port:
 

```
[edit interfaces ge-0/1/0 unit 0]user@access-switch# set ethernet-switching vlan-members [ sales support ]
```
3. Configure the VLAN ID to use for packets that are received with no dot1q tag (untagged packets):
 

```
[edit interfaces ge-0/1/0 unit 0]user@access-switch# set ethernet-switching native-vlan-id 1
```
4. Configure the sales VLAN:
 

```
[edit vlans sales]user@access-switch# set vlan-description "Sales VLAN"
user@access-switch# set vlan-id (VLANs) 100
user@access-switch# set l3-interface (VLAN) vlan.0
```
5. Configure the support VLAN:
 

```
[edit vlans support]user@access-switch# set vlan-description "Support VLAN"
user@access-switch# set vlan-id (VLANs) 200
user@access-switch# set l3-interface (VLAN) vlan.1
```
6. Create the subnet for the sales broadcast domain:
 

```
[edit interfaces]user@access-switch# set vlan unit 0 family inet address 192.0.2.1/25
```
7. Create the subnet for the support broadcast domain:
 

```
[edit interfaces]user@access-switch# set vlan unit 1 family inet address 192.0.2.129/25
```
8. Configure the interfaces in the sales VLAN:
 

```
[edit interfaces]user@access-switch# set ge-0/0/0 unit 0 description "Sales wireless access point port"
user@access-switch# set ge-0/0/0 unit 0 family ethernet-switching vlan members sales
user@access-switch# set ge-0/0/3 unit 0 description "Sales phone port"
user@access-switch# set ge-0/0/3 unit 0 family ethernet-switching vlan members sales
user@access-switch# set ge-0/0/20 unit 0 description "Sales file server port"
user@access-switch# set ge-0/0/20 unit 0 family ethernet-switching vlan members sales
user@access-switch# set ge-0/0/22 unit 0 description "Sales printer port"
user@access-switch# set ge-0/0/22 unit 0 family ethernet-switching vlan members sales
```
9. Configure the interfaces in the support VLAN:
 

```
[edit interfaces]user@access-switch# set ge-0/0/24 unit 0 description "Support wireless access point port"
user@access-switch# set ge-0/0/24 unit 0 family ethernet-switching vlan members support
user@access-switch# set ge-0/0/26 unit 0 description "Support phone port"
user@access-switch# set ge-0/0/26 unit 0 family
```



```
ethernet-switching vlan members supportuser@access-switch# set ge-0/0/44 unit 0
description "Support printer port"user@access-switch# set ge-0/0/44 unit 0 family
ethernet-switching vlan members supportuser@access-switch# set ge-0/0/46 unit 0
description "Support file server port"user@access-switch# set ge-0/0/46 unit 0 family
ethernet-switching vlan members support
```

10. Configure descriptions and VLAN tag IDs for the sales and support VLANs:

```
[edit vlans]user@access-switch# set sales vlan-description "Sales
VLAN"user@access-switch# set sales vlan-id 100user@access-switch# set support
vlan-description "Support VLAN"user@access-switch# set support vlan-id 200
```

11. To route traffic between the sales and support VLANs and associate a Layer 3 interface with each VLAN:

```
[edit vlans]user@access-switch# set sales l3-interface vlan.0user@access-switch#
set support l3-interface vlan.1
```

**Results** Display the results of the configuration:

```
user@access-switch> show
interfaces {
  ge-0/0/0 {
    unit 0 {
      description "Sales wireless access point port";
      family ethernet-switching {
        vlan members sales;
      }
    }
  }
  ge-0/0/3 {
    unit 0 {
      description "Sales phone port";
      family ethernet-switching {
        vlan members sales;
      }
    }
  }
  ge-0/0/20 {
    unit 0 {
      description "Sales file server port";
      family ethernet-switching {
        vlan members sales;
      }
    }
  }
  ge-0/0/22 {
    unit 0 {
      description "Sales printer port";
      family ethernet-switching {
        vlan members sales;
      }
    }
  }
  ge-0/0/24 {
    unit 0 {
      description "Support wireless access point port";
      family ethernet-switching {
        vlan members support;
      }
    }
  }
}
```



```

    }
  }
}
ge-0/0/26 {
  unit 0 {
    description "Support phone port";
    family ethernet-switching {
      vlan members support;
    }
  }
}
ge-0/0/44 {
  unit 0 {
    description "Support printer port";
    family ethernet-switching {
      vlan members sales;
    }
  }
}
ge-0/0/46 {
  unit 0 {
    description "Support file server port";
    family ethernet-switching {
      vlan members support;
    }
  }
}
ge-0/1/0 {
  unit 0 {
    description "Uplink module port connection to distribution switch";
    family ethernet-switching {
      port-mode trunk;
      vlan members [ sales support ];
      native-vlan-id 1;
    }
  }
}
vlan {
  unit 0 {
    family inet address 192.0.2.1/25;
  }
  unit 1 {
    family inet address 192.0.2.129/25;
  }
}
vlands {
  sales {
    vlan-id 100;
    vlan-description "Sales VLAN";
    l3-interface vlan.0;
  }
  support {
    vlan-id 200;
    vlan-description "Support VLAN";
    l3-interface vlan.1;
  }
}

```



```
}
}
```



**TIP:** To quickly configure the distribution switch, issue the load merge terminal command, then copy the hierarchy and paste it into the switch terminal window.

## Configuring the Distribution Switch

To configure the distribution switch:

### CLI Quick Configuration

To quickly configure the distribution switch, copy the following commands and paste them into the switch terminal window:

```
set interfaces ge-0/0/0 description "Connection to access switch"
set interfaces ge-0/0/0 ethernet-switching port-mode trunk
set interfaces ge-0/0/0 ethernet-switching vlan members [ sales support ]
set interfaces ge-0/0/0 ethernet-switching native-vlan-id 1
set interfaces vlan unit 0 family inet address 192.0.2.2/25
set interfaces vlan unit 1 family inet address 192.0.2.130/25
set vlans sales vlan-description "Sales VLAN"
set vlans sales vlan-id 100
set vlans sales l3-interface vlan.0
set vlans support vlan-description "Support VLAN"
set vlans support vlan-id 200
set vlans support l3-interface vlan.1
```

### Step-by-Step Procedure

To configure the distribution switch:

1. Configure the interface on the switch to be the trunk port that connects to the access switch:  

```
[edit interfaces ge-0/0/0 unit 0]user@distribution-switch# set description "Connection to access switch"
user@distribution-switch# set ethernet-switching port-mode trunk
```
2. Specify the VLANs to be aggregated on the trunk port:  

```
[edit interfaces ge-0/0/0 unit 0]user@distribution-switch# set ethernet-switching vlanmembers [ sales support ]
```
3. Configure the VLAN ID to use for packets that are received with no dot1q tag (untagged packets):  

```
[edit interfaces]user@distribution-switch# set ge-0/0/0 ethernet-switching native-vlan-id 1
```
4. Configure the sales VLAN:  

```
[edit vlans sales]user@distribution-switch# set vlan-description "Sales VLAN"
user@distribution-switch# set vlan-id (VLANs) 100
user@distribution-switch# set l3-interface (VLAN) vlan.0
```
5. Configure the support VLAN:  

```
[edit vlans support]user@distribution-switch# set vlan-description "Support VLAN"
user@distribution-switch# set vlan-id (VLANs) 200
user@distribution-switch# set l3-interface (VLAN) vlan.1
```
6. Create the subnet for the sales broadcast domain:



```
[edit interfaces]user@distribution-switch# set vlan unit 0 family inet address
192.0.2.2/25
```

7. Create the subnet for the support broadcast domain:

```
[edit interfaces] user@distribution-switch# set vlan unit 1 family inet address
192.0.2.130/25
```

**Results** Display the results of the configuration:

```
user@distribution-switch> show
interfaces {
  ge-0/0/0 {
    description "Connection to access switch";
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan members [ sales support ];
        native-vlan-id 1;
      }
    }
  }
}
vlan {
  unit 0 {
    family inet address 192.0.2.2/25;
  }
  unit 1 {
    family inet address 192.0.2.130/25;
  }
}
vpls {
  sales {
    vlan-id 100;
    vlan-description "Sales VLAN";
    l3-interface vlan.0;
  }
  support {
    vlan-id 200;
    vlan-description "Support VLAN";
    l3-interface vlan.1;
  }
}
```



**TIP:** To quickly configure the distribution switch, issue the load merge terminal command, then copy the hierarchy and paste it into the switch terminal window.



## Verification

To confirm that the configuration is working properly, perform these tasks:

- [Verifying the VLAN Members and Interfaces on the Access Switch on page 1494](#)
- [Verifying the VLAN Members and Interfaces on the Distribution Switch on page 1494](#)

### *Verifying the VLAN Members and Interfaces on the Access Switch*

**Purpose** Verify that the **sales** and **support** have been created on the switch.

**Action** List all VLANs configured on the switch:

```
user@switch> show vlans
```

| Name    | Tag | Interfaces                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| default |     | ge-0/0/1.0, ge-0/0/2.0, ge-0/0/4.0, ge-0/0/5.0,<br>ge-0/0/6.0, ge-0/0/7.0, ge-0/0/8.0*, ge-0/0/9.0,<br><br>ge-0/0/10.0, ge-0/0/11.0*, ge-0/0/12.0, ge-0/0/13.0,<br>ge-0/0/14.0, ge-0/0/15.0, ge-0/0/16.0, ge-0/0/17.0,<br>ge-0/0/18.0, ge-0/0/19.0*, ge-0/0/21.0, ge-0/0/23.0,<br>ge-0/0/25.0, ge-0/0/27.0*, ge-0/0/28.0, ge-0/0/29.0,<br>ge-0/0/30.0, ge-0/0/31.0*, ge-0/0/32.0, ge-0/0/33.0,<br>ge-0/0/34.0, ge-0/0/35.0*, ge-0/0/36.0, ge-0/0/37.0,<br>ge-0/0/38.0, ge-0/0/39.0*, ge-0/0/40.0, ge-0/0/41.0,<br>ge-0/0/42.0, ge-0/0/43.0*, ge-0/0/45.0, ge-0/0/47.0,<br>ge-0/1/1.0*, ge-0/1/2.0*, ge-0/1/3.0* |
| sales   | 100 | ge-0/0/0.0*, ge-0/0/3.0, ge-0/0/20.0, ge-0/0/22.0,<br>ge-0/1/0.0*,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| support | 200 | ge-0/0/24.0*, ge-0/0/26.0, ge-0/0/44.0, ge-0/0/46.0,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| mgmt    |     | me0.0*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

**Meaning** The output shows the **sales** and **support** VLANs and the interfaces associated with them.

### *Verifying the VLAN Members and Interfaces on the Distribution Switch*

**Purpose** Verify that the **sales** and **support** have been created on the switch.



**Action** List all VLANs configured on the switch:

```
user@switch> show vlans
```

| Name    | Tag | Interfaces                                                                                                                                                                                                                                                                                                                                                        |
|---------|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| default |     | ge-0/0/1.0, ge-0/0/2.0, ge-0/0/3.0, ge-0/0/4.0,<br>ge-0/0/5.0, ge-0/0/6.0, ge-0/0/7.0*, ge-0/0/8.0,<br><br>ge-0/0/9.0, ge-0/0/10.0*, ge-0/0/11.0, ge-0/0/12.0,<br>ge-0/0/13.0, ge-0/0/14.0, ge-0/0/15.0, ge-0/0/16.0,<br>ge-0/0/17.0, ge-0/0/18.0*, ge-0/0/19.0, ge-0/0/20.0,<br>ge-0/0/21.0, ge-0/0/22.0*, ge-0/0/23.0, ge-0/1/1.0*,<br>ge-0/1/2.0*, ge-0/1/3.0* |
| sales   | 100 | ge-0/0/0.0*                                                                                                                                                                                                                                                                                                                                                       |
| support | 200 | ge-0/0/0.0*                                                                                                                                                                                                                                                                                                                                                       |
| mgmt    |     | me0.0*                                                                                                                                                                                                                                                                                                                                                            |

**Meaning** The output shows the **sales** and **support** VLANs associated to interface **ge-0/0/0.0**. Interface **ge-0/0/0.0** is the trunk interface connected to the access switch.

**Related Documentation**

- [Example: Setting Up Basic Bridging and a VLAN on the QFX Series on page 1467](#)
- [Example: Setting Up Bridging with Multiple VLANs on page 1476](#)
- [Understanding Bridging on page 1381](#)

## Example: Configuring BPDU Protection on STP Interfaces to Prevent STP Miscalculations

The QFX Series products provide Layer 2 loop prevention through Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), and Multiple Spanning Tree Protocol (MSTP). Configure BPDU protection on interfaces to prevent them from receiving BPDUs that could result in STP misconfigurations, which could lead to network outages.

This example describes how to configure BPDU protection on access interfaces in QFX Series products in an RSTP topology:

- [Requirements on page 1495](#)
- [Overview and Topology on page 1496](#)
- [Configuration on page 1497](#)
- [Verification on page 1497](#)

### Requirements

This example uses the following hardware and software components:

- Junos OS Release 11.1 or later for the QFX Series
- Two edged-linked switches in an RSTP topology





**NOTE:** By default, RSTP is enabled on the QFX Series.

## Overview and Topology


A loop-free network is supported through the exchange of a special type of frame called a bridge protocol data unit (BPDU). However, receipt of BPDUs on certain interfaces in an STP, RSTP, or MSTP topology. It can lead to network outages by triggering an STP misconfiguration. To prevent such outages, enable BPDU protection on those interfaces that should not receive BPDUs.

Enable BPDU protection on switch interfaces connected to user devices or on interfaces on which no BPDUs are expected, such as edge ports. If a BPDU is received on a BPDU-protected interface, the interface is disabled and stops forwarding frames.

Two switches are displayed in [Figure 33 on page 1496](#). In this example, Switch 1 and Switch 2 are configured for RSTP and create a loop-free topology. The interfaces on Switch 2 are access ports.

This example shows you how to configure interface **xe-0/0/5** and interface **xe-0/0/6** as edge ports and how to configure BPDU protection. When BPDU protection is enabled, the interfaces transition to a blocking state when they receive BPDUs.

**Figure 33: BPDU Protection Topology**

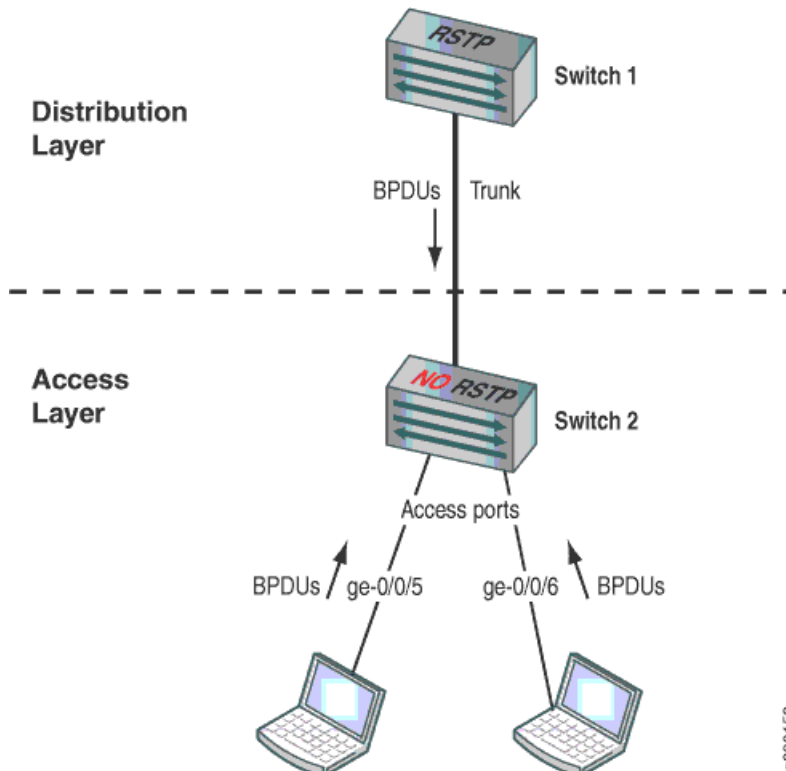

[Table 115 on page 1497](#) shows the components that will be configured for BPDU protection.



Table 115: Components of the Topology for Configuring BPDU Protection on the QFX Series

| Component                     | Settings                                                                                                                                       |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Switch 1 (Distribution Layer) | Switch 1 is connected to Switch 2 on a trunk interface.                                                                                        |
| Switch 2 (Access Layer)       | Switch 2 has these access ports that require BPDU protection: <ul style="list-style-type: none"> <li>• xe-0/0/5</li> <li>• xe-0/0/6</li> </ul> |

This configuration example uses an RSTP topology. You also can configure BPDU protection for STP or MSTP topologies at the `[edit protocols (mstp | stp)]` hierarchy level.

### Configuration

**CLI Quick Configuration** To quickly configure BPDU protection on Switch 2, copy the following commands and paste them into the switch terminal window:

```
[edit]
set protocols rstp interface xe-0/0/5 edge
set protocols rstp interface xe-0/0/6 edge
set protocols rstp bpdu-block-on-edge
```

**Step-by-Step Procedure** To configure BPDU protection:

1. Configure interface `xe-0/0/5` and interface `xe-0/0/6` on Switch 2 as edge ports:

```
[edit protocols rstp]
user@switch# set interface xe-0/0/5 edge
user@switch# set interface xe-0/0/6 edge
```

2. Configure BPDU protection on all edge ports:

```
[edit protocols rstp]
user@switch# set bpdu-block-on-edge
```

**Results** Check the results of the configuration:

```
user@switch> show configuration protocols rstp
interface xe-0/0/5.0 {
    edge;
}
interface xe-0/0/6.0 {
    edge;
}
bpdu-block-on-edge;
```

### Verification

To confirm that the configuration is working properly, perform these tasks:

- [Displaying the Interface State Before BPDU Protection Is Triggered on page 1498](#)
- [Verifying That BPDU Protection Is Working Correctly on page 1498](#)



**Displaying the Interface State Before BPDU Protection Is Triggered**

**Purpose** Before BPDUs are being received from the devices connected to interface **xe-0/0/5** and interface **xe-0/0/6**, confirm the interface state.

**Action** You can verify the interface state using the **show spanning-tree interface** command:

```
user@switch> show spanning-tree interface
```

```
Spanning tree interface parameters for instance 0
```

| Interface  | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/0.0 | 128:513 | 128:513               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/1.0 | 128:514 | 128:514               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/2.0 | 128:515 | 128:515               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/3.0 | 128:516 | 128:516               | 32768.0019e2503f00      | 20000        | FWD   | DESG |
| xe-0/0/4.0 | 128:517 | 128:517               | 32768.0019e2503f00      | 20000        | FWD   | DESG |
| xe-0/0/5.0 | 128:518 | 128:518               | 32768.0019e2503f00      | 20000        | FWD   | DESG |
| xe-0/0/6.0 | 128:519 | 128:519               | 32768.0019e2503f00      | 20000        | FWD   | DESG |

[output truncated]

**Meaning** The output shows that interface **xe-0/0/5.0** and interface **xe-0/0/6.0** are designated ports in a forwarding state.

**Verifying That BPDU Protection Is Working Correctly**

**Purpose** In this example, the devices connected to Switch 2 start sending BPDUs to interface **xe-0/0/5.0** and interface **xe-0/0/6.0**. Verify that BPDU protection is configured on the interfaces.

**Action** You can verify that BPDU protection is configured on the interfaces by using the **show spanning-tree interface** command:

```
user@switch> show spanning-tree interface
```

```
Spanning tree interface parameters for instance 0
```

| Interface                  | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|----------------------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/0.0                 | 128:513 | 128:513               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/1.0                 | 128:514 | 128:514               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/2.0                 | 128:515 | 128:515               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/3.0                 | 128:516 | 128:516               | 32768.0019e2503f00      | 20000        | FWD   | DESG |
| xe-0/0/4.0                 | 128:517 | 128:517               | 32768.0019e2503f00      | 20000        | FWD   | DESG |
| xe-0/0/5.0<br>(Bpdu-Incon) | 128:518 | 128:518               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/6.0<br>(Bpdu-Incon) | 128:519 | 128:519               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/7.0                 | 128:520 | 128:1                 | 16384.00aabbcc0348      | 20000        | FWD   | ROOT |
| xe-0/0/8.0                 | 128:521 | 128:521               | 32768.0019e2503f00      | 20000        | FWD   | DESG |

[output truncated]

**Meaning** When BPDUs are sent from the devices to interface **xe-0/0/5.0** and interface **xe-0/0/6.0** on Switch 2, the output from the operational mode command **show spanning-tree interface**



shows that the interfaces have transitioned to a BPDU inconsistent state. The BPDU inconsistent state blocks the interfaces and prevents them from forwarding traffic.

Disabling the BPDU protection configuration on an interface does not unblock the interface. If the `disable-timeout` statement has been included in the BPDU configuration, the interface automatically returns to service after the timer expires. Otherwise, use the operational mode command `clear ethernet-switching bpd-error` to unblock the interface.

If the devices connected to Switch 2 send BPDUs to the interfaces again, BPDU protection is triggered once more and the interfaces transition back to the BPDU inconsistent state. In such cases, you need to find and repair the misconfiguration on the devices that is triggering the sending of BPDUs to Switch 2.

#### Related Documentation

- [Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428](#)
- [Example: Configuring Loop Protection to Prevent Interfaces from Transitioning from Blocking to Forwarding in a Spanning Tree on page 1504](#)
- [Example: Configuring Root Protection to Enforce Root Bridge Placement in Spanning Trees on page 1499](#)
- [Understanding BPDU Protection for STP, RSTP, and MSTP on page 1413](#)

### Example: Configuring Root Protection to Enforce Root Bridge Placement in Spanning Trees

QFX Series products provide Layer 2 loop prevention through Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), and Multiple Spanning Tree Protocol (MSTP). Root protection increases the efficiency of STP, RSTP, and MSTP by allowing network administrators to enforce the root bridge placement in the network manually.

This example describes how to configure root protection on an interface for the QFX Series.

- [Requirements on page 1499](#)
- [Overview and Topology on page 1500](#)
- [Configuration on page 1502](#)
- [Verification on page 1502](#)

#### Requirements

This example uses the following hardware and software components:

- Junos OS Release 11.1 or later for the QFX Series
- Four switches in an RSTP topology



Before you configure the interface for root protection, be sure you have:

- RSTP operating on the switches.



**NOTE:** By default, RSTP is enabled on the QFX Series.

---

## Overview and Topology

---

Peer STP applications running on switch interfaces exchange a special type of frame called a bridge protocol data unit (BPDU). Switches communicate interface information using BPDUs to create a loop-free topology that ultimately determines the root bridge and which interfaces block or forward traffic in the spanning tree.

You can also see BPDUs generated when you run a bridge application on a device attached to the switch. This can interfere with root port election, which may sometimes lead to the wrong root port being elected through the above process. Root protection allows you to manually enforce the root bridge placement in the network.

To prevent this from happening, enable root protection on interfaces that should not receive more BPDUs from the root bridge and should not be elected as the root port. These interfaces are typically located on an administrative boundary and are designated ports.

When root protection is enabled on an interface:

- The interface is blocked from becoming the root port.
- Root protection is enabled for all STP instances on that interface.
- The interface is blocked only for instances for which it receives more BPDUs. Otherwise, it participates in the spanning-tree topology.



**NOTE:** An interface can be configured for either root protection or loop protection, but not for both.

Four switches are displayed in [Figure 34 on page 1501](#). In this example, they are configured for RSTP and create a loop-free topology. Interface **xe-0/0/7** on Switch 1 is a designated port on an administrative boundary. It connects to Switch 4. Switch 3 is the root bridge. Interface **xe-0/0/6** on Switch 1 is the root port.

This example shows how to configure root protection on interface **xe-0/0/7** to prevent it from transitioning to become the root port.



Figure 34: Network Topology for Root Protection

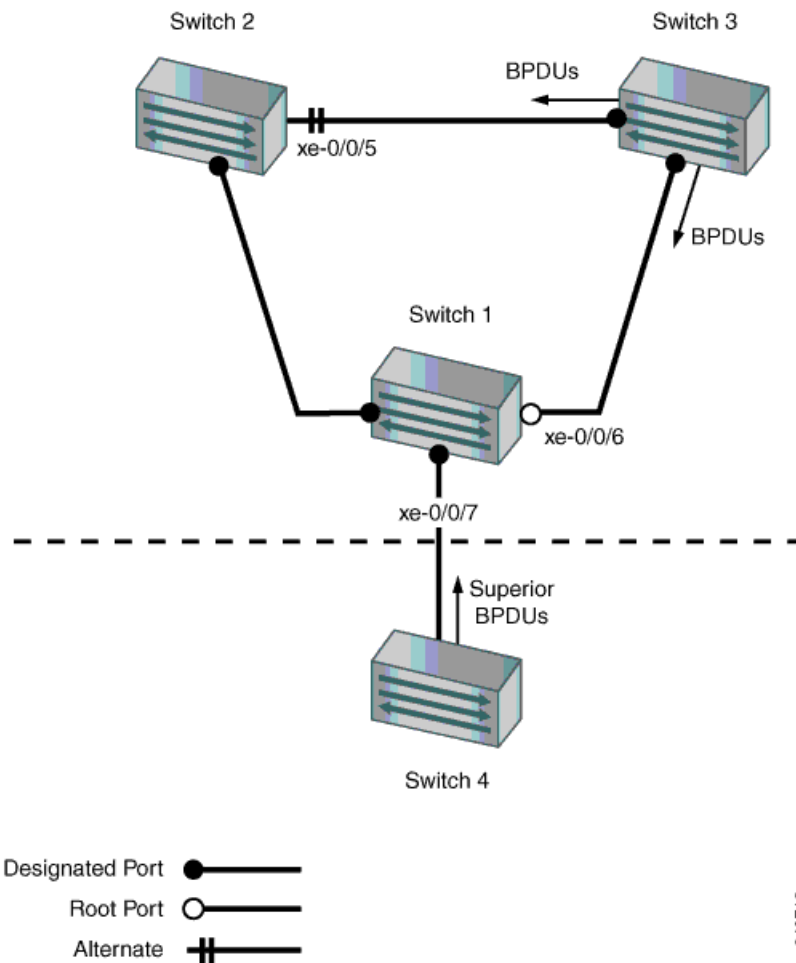


Table 116 on page 1501 shows the components that will be configured for root protection.

Table 116: Topology for Configuring Root Protection on the QFX Series

| Component | Settings                                                                                                                                                                                    |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Switch 1  | Switch 1 is connected to Switch 4 through interface <b>xe-0/0/7</b> .                                                                                                                       |
| Switch 2  | Switch 2 is connected to Switch 1 and Switch 3. Interface <b>xe-0/0/4</b> is the alternate port in the RSTP topology.                                                                       |
| Switch 3  | Switch 3 is the root bridge and is connected to Switch 1 and Switch 2.                                                                                                                      |
| Switch 4  | Switch 4 is connected to Switch 1. After loop protection is configured on interface <b>xe-0/0/7</b> , Switch 4 sends more BPDUs that trigger loop protection on interface <b>xe-0/0/7</b> . |

A spanning-tree topology contains ports that have specific roles:

- The *root port* is responsible for forwarding data to the root bridge.



- The *alternate port* is a standby port for the root port. When a root port goes down, the alternate port becomes the active root port.
- The *designated port* forwards data to the downstream network segment or device.

This configuration example uses an RSTP topology. However, you can also configure root protection for STP or MSTP topologies at the `[edit protocols (mstp | stp)]` hierarchy level.

---

### Configuration

**CLI Quick Configuration** To quickly configure root protection on interface `xe-0/0/7`, copy the following command and paste it into the switch terminal window:

```
[edit]
set protocols rstp interface xe-0/0/7 no-root-port
```

**Step-by-Step Procedure** To configure root protection:

1. Configure interface `xe-0/0/7`:  

```
[edit protocols rstp]
user@switch#
set interface xe-0/0/7 no-root-port
```

**Results** Check the results of the configuration:

```
user@switch> show configuration protocols rstp
interface xe-0/0/7.0 {
  no-root-port;
}
```

---

### Verification

To confirm that the configuration is working properly, perform these tasks:

- [Displaying the Interface State Before Root Protection Is Triggered on page 1502](#)
- [Verifying That Root Protection Is Working on the Interface on page 1503](#)

#### *Displaying the Interface State Before Root Protection Is Triggered*

**Purpose** Before root protection is triggered on interface `xe-0/0/7`, confirm the interface state.



**Action** Confirm the state of the interfaces before root protection is configured:

```
user@switch> show spanning-tree interface
```

Spanning tree interface parameters for instance 0

| Interface  | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/0.0 | 128:513 | 128:513               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/1.0 | 128:514 | 128:514               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/2.0 | 128:515 | 128:515               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/3.0 | 128:516 | 128:516               | 32768.0019e2503f00      | 20000        | FWD   | DESG |
| xe-0/0/4.0 | 128:517 | 128:517               | 32768.0019e2503f00      | 20000        | FWD   | DESG |
| xe-0/0/5.0 | 128:518 | 128:2                 | 16384.00aabbcc0348      | 20000        | BLK   | ALT  |
| xe-0/0/6.0 | 128:519 | 128:1                 | 16384.00aabbcc0348      | 20000        | FWD   | ROOT |
| xe-0/0/7.0 | 128:520 | 128:520               | 32768.0019e2503f00      | 20000        | FWD   | DESG |

[output truncated]

**Meaning** The output from the operational mode command `show spanning-tree interface` shows that **xe-0/0/7.0** is a designated port in a forwarding state.

#### *Verifying That Root Protection Is Working on the Interface*

**Purpose** A configuration change takes place on Switch 4. A lower bridge priority on Switch 4 causes it to send more BPDUs to interface **xe-0/0/7**. Receipt of more BPDUs on interface **xe-0/0/7** triggers root protection. Verify that root protection is operating on interface **xe-0/0/7**.

**Action** Verify that root protection has been configured and is operating correctly:

```
user@switch> show spanning-tree interface
```

Spanning tree interface parameters for instance 0

| Interface  | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/0.0 | 128:513 | 128:513               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/1.0 | 128:514 | 128:514               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/2.0 | 128:515 | 128:515               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/3.0 | 128:516 | 128:516               | 32768.0019e2503f00      | 20000        | FWD   | DESG |
| xe-0/0/4.0 | 128:517 | 128:517               | 32768.0019e2503f00      | 20000        | FWD   | DESG |
| xe-0/0/5.0 | 128:518 | 128:2                 | 16384.00aabbcc0348      | 20000        | BLK   | ALT  |
| xe-0/0/6.0 | 128:519 | 128:1                 | 16384.00aabbcc0348      | 20000        | FWD   | ROOT |
| xe-0/0/7.0 | 128:520 | 128:520               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |

(Root-Incon)  
[output truncated]

**Meaning** The operational mode command `show spanning-tree interface` shows that interface **xe-0/0/7.0** has transitioned to a loop inconsistent state. The loop inconsistent state blocks the interface and prevents it from becoming a candidate for the root port. When the root bridge no longer receives more STP BPDUs from the interface, the interface recovers and transitions back to a forwarding state. Recovery is automatic.

**Related Documentation**

- [Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428](#)



- [Example: Configuring Loop Protection to Prevent Interfaces from Transitioning from Blocking to Forwarding in a Spanning Tree on page 1504](#)
- [Example: Configuring BPDU Protection on STP Interfaces to Prevent STP Miscalculations on page 1495](#)
- [Understanding Root Protection for STP, RSTP, VSTP, and MSTP on page 1415](#)

## Example: Configuring Loop Protection to Prevent Interfaces from Transitioning from Blocking to Forwarding in a Spanning Tree

The QFX Series products provide Layer 2 loop prevention through Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), and Multiple Spanning Tree Protocol (MSTP). Loop protection increases the efficiency of STP, RSTP, and MSTP by preventing interfaces from moving into a forwarding state that would create a loop in the network.

This example describes how to configure loop protection for an interface for the QFX Series in an RSTP topology:

- [Requirements on page 1504](#)
- [Overview and Topology on page 1504](#)
- [Configuration on page 1506](#)
- [Verification on page 1506](#)

### Requirements

---

This example uses the following hardware and software components:

- Junos OS Release 11.1 or later for the QFX Series
- Three switches in an RSTP topology



**NOTE:** By default, RSTP is enabled for the QFX Series.

---

### Overview and Topology

---

A loop-free network in spanning-tree topologies is supported through the exchange of a special type of frame called a bridge protocol data unit (BPDU). Peer STP applications running on the switch interfaces use BPDUs to communicate. Ultimately, the exchange of BPDUs determines which interfaces block traffic (preventing loops) and which interfaces become root ports and forward traffic.

A blocking interface can transition to the forwarding state in error if the interface stops receiving BPDUs from its designated port on the segment. Such a transition error can occur when there is a hardware error on the switch or software configuration error between the switch and its neighbor. When this happens, a loop appears in the spanning tree. Loops in a Layer 2 topology cause broadcast, unicast, and multicast frames to continuously circle the looped network. As a switch processes a flood of frames in a



looped network, its resources become depleted, and the ultimate result is a network outage.




**NOTE:** An interface can be configured for either loop protection or root protection, but not for both.

Three switches are displayed in [Figure 35 on page 1505](#). In this example, they are configured for RSTP and create a loop-free topology. Interface **xe-0/0/6** is blocking traffic between Switch 3 and Switch 1; thus, traffic is forwarded through interface **xe-0/0/7** on Switch 2. BPDUs are being sent from the root bridge on Switch 1 to both of these interfaces.

This example shows how to configure loop protection on interface **xe-0/0/6** to prevent it from transitioning from a blocking state to a forwarding state and creating a loop in the spanning-tree topology.

Figure 35: Network Topology for Loop Protection

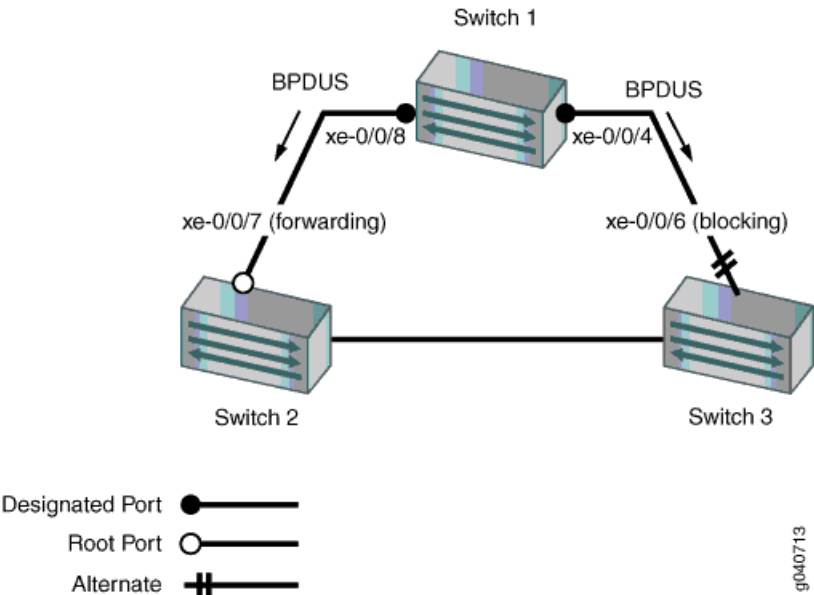

[Table 117 on page 1505](#) shows the components that will be configured for loop protection.

Table 117: Topology for Configuring Loop Protection on the QFX Series

| Components | Settings                                                              |
|------------|-----------------------------------------------------------------------|
| Switch 1   | Switch 1 is the root bridge.                                          |
| Switch 2   | Switch 2 has the root port <b>xe-0/0/7</b> .                          |
| Switch 3   | Switch 3 is connected to Switch 1 through interface <b>xe-0/0/6</b> . |

A spanning-tree topology contains ports that have specific roles:



- The *root port* is responsible for forwarding data to the root bridge.
- The *alternate port* is a standby port for the root port. When a root port goes down, the alternate port becomes the active root port.
- The *designated port* forwards data to the downstream network segment or device.

This configuration example uses an RSTP topology. However, you can also configure loop protection for STP or MSTP topologies at the `[edit protocols (mstp | stp)]` hierarchy level.

---

### Configuration

#### CLI Quick Configuration

To quickly configure loop protection on interface **xe-0/0/6**:

```
[edit]
set protocols rstp interface xe-0/0/6 bpdu-timeout-action block
```

#### Step-by-Step Procedure

To configure loop protection:

1. Configure interface **xe-0/0/6** on Switch 3:  

```
[edit protocols rstp]
user@switch# set interface xe-0/0/6 bpdu-timeout-action block
```

#### Results

Check the results of the configuration:

```
user@switch> show configuration protocols rstp
interface xe-0/0/6.0 {
  bpdu-timeout-action {
    block;
  }
}
```

---

### Verification

To confirm that the configuration is working properly, perform these tasks:

- [Displaying the Interface State Before Loop Protection Is Triggered on page 1506](#)
- [Verifying That Loop Protection Is Working on an Interface on page 1507](#)

#### *Displaying the Interface State Before Loop Protection Is Triggered*

#### Purpose

Before loop protection is triggered on interface **xe-0/0/6**, confirm that the interface is blocked.



**Action** Display the interface state and role before applying root protection:

```
user@switch> show spanning-tree interface
```

```
Spanning tree interface parameters for instance 0
```

| Interface  | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/0.0 | 128:513 | 128:513               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/1.0 | 128:514 | 128:514               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/2.0 | 128:515 | 128:515               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/3.0 | 128:516 | 128:516               | 32768.0019e2503f00      | 20000        | FWD   | DESG |
| xe-0/0/4.0 | 128:517 | 128:517               | 32768.0019e2503f00      | 20000        | FWD   | DESG |
| xe-0/0/5.0 | 128:518 | 128:518               | 32768.0019e2503f00      | 20000        | FWD   | DESG |
| xe-0/0/6.0 | 128:519 | 128:2                 | 16384.00aabbcc0348      | 20000        | BLK   | ALT  |

[output truncated]

**Meaning** The output from the operational mode command **show spanning-tree interface** shows that **xe-0/0/6.0** is the alternate port and is blocked.

#### *Verifying That Loop Protection Is Working on an Interface*

**Purpose** Verify that the loop protection configuration on interface **xe-0/0/6**. RSTP has been disabled on interface **xe-0/0/4** on Switch 1. This stops BPDUs from being sent to interface **xe-0/0/6** and triggering loop protection on that interface.

**Action** Display the interface state and role after applying root protection:

```
user@switch> show spanning-tree interface
```

```
Spanning tree interface parameters for instance 0
```

| Interface  | Port ID | Designated<br>port ID | Designated<br>bridge ID | Port<br>Cost | State | Role |
|------------|---------|-----------------------|-------------------------|--------------|-------|------|
| xe-0/0/0.0 | 128:513 | 128:513               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/1.0 | 128:514 | 128:514               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/2.0 | 128:515 | 128:515               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |
| xe-0/0/3.0 | 128:516 | 128:516               | 32768.0019e2503f00      | 20000        | FWD   | DESG |
| xe-0/0/4.0 | 128:517 | 128:517               | 32768.0019e2503f00      | 20000        | FWD   | DESG |
| xe-0/0/5.0 | 128:518 | 128:518               | 32768.0019e2503f00      | 20000        | FWD   | DESG |
| xe-0/0/6.0 | 128:519 | 128:519               | 32768.0019e2503f00      | 20000        | BLK   | DIS  |

(Loop-Incon)  
[output truncated]

**Meaning** The operational mode command **show spanning-tree interface** shows that interface **xe-0/0/6.0** has detected that BPDUs are no longer being forwarded to it and has moved into a loop-inconsistent state. The loop-inconsistent state prevents the interface from transitioning to a forwarding state. The interface recovers and transitions back to its original state as soon as it receives BPDUs.

**Related Documentation**

- [Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428](#)
- [Example: Configuring Root Protection to Enforce Root Bridge Placement in Spanning Trees on page 1499](#)



- [Example: Configuring BPDU Protection on STP Interfaces to Prevent STP Miscalculations on page 1495](#)
- [Understanding Loop Protection for STP, RSTP, VSTP, and MSTP on page 1414](#)

## Example: Disabling MAC Learning

By default, MAC learning is enabled on the QFX Series. This topic provides examples for disabling, enabling, and verifying the operation of MAC learning on the QFX Series. These examples require that you be logged in as the root user to the switch on which you wish to modify MAC learning.

- To disable MAC learning in a VLAN:

```
[edit]
user@switch# edit ethernet-switching-options interfaces xe-0/0/0.0
[edit ethernet-switching-options interfaces xe-0/0/0.0]
user@switch# set no-mac-learning
```

- To reenable MAC learning:

```
[edit]
user@switch# edit ethernet-switching-options interfaces xe-0/0/0.0
[edit ethernet-switching-options interfaces xe-0/0/0.0]
user@switch# delete no-mac-learning
```

- To verify the status of MAC learning on the QFX Series:

```
user@switch> show ethernet-switching table
Learning stats: 10 learn msg rcvd, 2 error, 0 forced update
Interface           Local pkts      Transit pkts      Error
xe-0/0/0.0           0                6                1
xe-0/0/22.0          0                0                0
xe-0/0/1.0           0                4                1
xe-0/0/2.0           0                0                0
xe-0/0/3.0           0                0                0
xe-0/0/4.0           0                0                0
xe-0/0/19.0          0                0                0
xe-0/0/18.0          0                0                0
xe-0/0/9.0           0                0                0
```

### Related Documentation

- [Understanding MAC Learning on page 1388](#)
- [Disabling MAC Learning on page 1558](#)
- [no-mac-learning \(Per VLAN\) on page 1618](#)

## Example: Disabling MAC Learning in a VLAN

When MAC learning is enabled, a MAC address is learned dynamically from a packet's source MAC address. By default, MAC learning is enabled on a VLAN. This topic provides examples for disabling, enabling, and verifying the operation of MAC learning in a VLAN. Disabling dynamic MAC learning in a VLAN on a QFX Series product prevents a node from learning source and destination MAC addresses. These examples require that you be logged in as the root user to the switch on which you wish to modify MAC learning. This example uses a VLAN named *blue*.



- To disable MAC learning in a VLAN:

```
[edit vlans vlan-name]
user@switch# set no-mac-learning
```

For example:

```
[edit vlans blue]
user@switch# set no-mac-learning
```

- To verify that you have disabled MAC learning, issue the **show ethernet-switching table** command:

```
user@switch> show ethernet-switching table
Ethernet-switching table: 5 entries, 2 learned
```

| VLAN    | MAC address       | Type   | Age  | Interfaces    |
|---------|-------------------|--------|------|---------------|
| blue    | *                 | Flood  |      | - All-members |
| blue    | 00:1f:12:39:90:80 | Static |      | - Router      |
| default | *                 | Flood  |      | - All-members |
| default | 00:1f:12:39:90:89 | Learn  | 3:15 | ge-0/0/1.0    |
| default | 00:1f:12:39:a3:81 | Learn  | 0    | ge-0/0/1.0    |

The CLI output shows that the VLAN named *blue* is not configured for MAC learning. The **Type** column includes only **static** (MAC address that are manually created) and **flood** (MAC addresses that are unknown and flooded to all members of the VLAN) entries.

- To reenable MAC learning in a VLAN, issue either of the following two commands::

```
[edit vlans vlan-name]
user@switch delete no-mac-learning
user@switch# deactivate no-mac-learning
```

For example:

```
[edit vlans blue]
user@switch delete no-mac-learning
user@switch# deactivate no-mac-learning
```

- To verify that you have enabled MAC learning, issue the **show ethernet-switching table** command:

```
user@switch> show ethernet-switching table
Ethernet-switching table: 6 entries, 3 learned
```

| VLAN    | MAC address       | Type   | Age | Interfaces    |
|---------|-------------------|--------|-----|---------------|
| blue    | *                 | Flood  |     | - All-members |
| blue    | 00:1f:12:39:90:80 | Static |     | - Router      |
| blue    | 00:1f:12:39:a3:80 | Learn  | 0   | ge-0/0/9.0    |
| default | *                 | Flood  |     | - All-members |
| default | 00:1f:12:39:90:89 | Learn  | 0   | ge-0/0/1.0    |
| default | 00:1f:12:39:a3:81 | Learn  | 0   | ge-0/0/1.0    |

The CLI output shows that the VLAN named *blue* is configured for MAC learning. The **Type** column includes **static** (MAC address that are manually created), **flood** (MAC addresses that are unknown and flooded to all members of the VLAN), and **Learn** (MAC addresses that are earned dynamically from a packet's source MAC address) entries.

#### Related Documentation

- [Understanding MAC Learning on page 1388](#)
- [Disabling MAC Learning in a VLAN on page 1559](#)
- [no-mac-learning \(Per VLAN\) on page 1618](#)



- [show ethernet-switching table on page 1711](#)

## Private VLAN Configuration Examples

- [Example: Configuring a Private VLAN on a Single Switch on page 1510](#)
- [Example: Configuring a Private VLAN Spanning Multiple Switches on page 1515](#)
- [Example: Configuring PVLANS with Secondary VLAN Trunk Ports and Promiscuous Access Ports on page 1529](#)

### Example: Configuring a Private VLAN on a Single Switch

For security reasons, it is often useful to restrict the flow of broadcast and unknown unicast traffic and even to limit the communication between known hosts. The private VLAN (PVLAN) feature allows an administrator to split a broadcast domain into multiple isolated broadcast subdomains, essentially putting a VLAN inside a VLAN.

This example describes how to create a PVLAN on a single switch:

- [Requirements on page 1510](#)
- [Overview and Topology on page 1510](#)
- [Configuration on page 1511](#)
- [Verification on page 1514](#)

#### Requirements

This example uses the following hardware and software components:

- One QFX3500 device
- Junos OS Release 12.1 or later for the QFX Series

Before you begin configuring a PVLAN, make sure you have created and configured the necessary VLANs. See [“Configuring VLANs” on page 1553](#).

#### Overview and Topology

In a large office with multiple buildings and VLANs, you might need to isolate some workgroups or other endpoints for security reasons or to partition the broadcast domain. This configuration example shows a simple topology to illustrate how to create a PVLAN with one primary VLAN and two community VLANs, one for HR and one for finance, as well as two isolated ports—one for the mail server and the other for the backup server.

[Table 118 on page 1510](#) lists the settings for the sample topology.

**Table 118: Components of the Topology for Configuring a PVLAN**

| Interface   | Description                                      |
|-------------|--------------------------------------------------|
| ge-0/0/0.0  | Primary VLAN ( <b>pvlan100</b> ) trunk interface |
| ge-0/0/11.0 | User 1, HR Community ( <b>hr-comm</b> )          |



Table 118: Components of the Topology for Configuring a PVLAN (*continued*)

| Interface   | Description                                       |
|-------------|---------------------------------------------------|
| ge-0/0/12.0 | User 2, HR Community ( <b>hr-comm</b> )           |
| ge-0/0/13.0 | User 3, Finance Community ( <b>finance-comm</b> ) |
| ge-0/0/14.0 | User 4, Finance Community ( <b>finance-comm</b> ) |
| ge-0/0/15.0 | Mail server, Isolated ( <b>isolated</b> )         |
| ge-0/0/16.0 | Backup server, Isolated ( <b>isolated</b> )       |
| ge-1/0/0.0  | Primary VLAN ( <b>pvlan100</b> ) trunk interface  |

### Configuration

#### CLI Quick Configuration

To quickly create and configure a PVLAN, copy the following commands and paste them into the switch terminal window:

```
[edit]
set vlans pvlan100 vlan-id 100
set interfaces ge-0/0/0 unit 0 family ethernet-switching port-mode trunk
set interfaces ge-0/0/0 unit 0 family ethernet-switching vlan members pvlan
set interfaces ge-1/0/0 unit 0 family ethernet-switching port-mode trunk
set interfaces ge-0/0/11 unit 0 family ethernet-switching port-mode access
set interfaces ge-0/0/12 unit 0 family ethernet-switching port-mode access
set interfaces ge-0/0/13 unit 0 family ethernet-switching port-mode access
set interfaces ge-0/0/14 unit 0 family ethernet-switching port-mode access
set interfaces ge-0/0/15 unit 0 family ethernet-switching port-mode access
set interfaces ge-0/0/16 unit 0 family ethernet-switching port-mode access
set vlans pvlan100 pvlan
set vlans pvlan100 interface ge-0/0/0.0
set vlans pvlan100 interface ge-1/0/0.0
set vlans hr-comm interface ge-0/0/11.0
set vlans hr-comm interface ge-0/0/12.0
set vlans finance-comm interface ge-0/0/13.0
set vlans finance-comm interface ge-0/0/14.0
set vlans hr-comm primary-vlan pvlan100
set vlans finance-comm primary-vlan pvlan100
set pvlan100 interface ge-0/0/15.0 isolated
set pvlan100 interface ge-0/0/16.0 isolated
```

#### Step-by-Step Procedure

To configure the PVLAN:

1. Set the VLAN ID for the primary VLAN:

```
[edit vlans]
user@switch# set pvlan vlan-id 100
```

2. Set the interfaces and port modes:

```
[edit interfaces]
user@switch# set ge-0/0/0 unit 0 family ethernet-switching port-mode trunk
user@switch# set ge-0/0/0 unit 0 family ethernet-switching vlan members pvlan
user@switch# set ge-1/0/0 unit 0 family ethernet-switching port-mode trunk
user@switch# set ge-1/0/0 unit 0 family ethernet-switching vlan members pvlan
```



```

user@switch# set ge-0/0/11 unit 0 family ethernet-switching port-mode access
user@switch# set ge-0/0/12 unit 0 family ethernet-switching port-mode access
user@switch# set ge-0/0/13 unit 0 family ethernet-switching port-mode access
user@switch# set ge-0/0/14 unit 0 family ethernet-switching port-mode access
user@switch# set ge-0/0/15 unit 0 family ethernet-switching port-mode access
user@switch# set ge-0/0/16 unit 0 family ethernet-switching port-mode access

```

3. Set the primary VLAN to have no local switching:



**NOTE:** The primary VLAN must be a tagged VLAN.

[edit vlans]

```
user@switch# set pvlan100 pvlan
```

4. Add the trunk interfaces to the primary VLAN:

[edit vlans]

```
user@switch# set pvlan100 interface ge-0/0/0.0
```

```
user@switch# set pvlan100 interface ge-1/0/0.0
```

5. For each secondary VLAN, configure access interfaces:



**NOTE:** We recommend that the secondary VLANs be untagged VLANs. It does not impair functioning if you tag the secondary VLANs. However, the tags are not used when a secondary VLAN is configured on a single switch.

[edit vlans]

```
user@switch# set hr-comm interface ge-0/0/11.0
```

```
user@switch# set hr-comm interface ge-0/0/12.0
```

```
user@switch# set finance-comm interface ge-0/0/13.0
```

```
user@switch# set finance-comm interface ge-0/0/14.0
```

6. For each community VLAN, set the primary VLAN:

[edit vlans]

```
user@switch# set hr-comm primary-vlan pvlan100
```

```
user@switch# set finance-comm primary-vlan pvlan100
```

7. Configure the isolated interfaces in the primary VLAN:

[edit vlans]

```
user@switch# set pvlan100 interface ge-0/0/15.0 isolated
```

```
user@switch# set pvlan100 interface ge-0/0/16.0 isolated
```

## Results

Check the results of the configuration:

[edit]

```
user@switch# show
```

```
interfaces {
```

```
  ge-0/0/0 {
```

```
    unit 0 {
```

```
      family ethernet-switching {
```

```
        port-mode trunk;
```

```
        vlan {
```

```
          members pvlan100;
```



```

    }
  }
}
ge-1/0/0 {
  unit 0 {
    family ethernet-switching;
  }
}
ge-0/0/11 {
  unit 0 {
    family ethernet-switching {
      port-mode access;
    }
  }
}
ge-0/0/12 {
  unit 0 {
    family ethernet-switching {
      port-mode access;
    }
  }
}
ge-0/0/13 {
  unit 0 {
    family ethernet-switching {
      port-mode access;
    }
  }
}
ge-0/0/14 {
  unit 0 {
    family ethernet-switching {
      port-mode access;
    }
  }
}
vpls {
  finance-comm {
    interface {
      ge-0/0/13.0;
      ge-0/0/14.0;
    }
    primary-vlan pvlan100;
  }
  hr-comm {
    interface {
      ge-0/0/11.0;
      ge-0/0/12.0;
    }
    primary-vlan pvlan100;
  }
  pvlan100 {
    vlan-id 100;
    interface {
      ge-0/0/15.0;
    }
  }
}

```



```
        ge-0/0/16.0;  
        ge-0/0/0.0;  
        ge-1/0/0.0;  
    }  
    pvlan;  
}  
}
```

---

## Verification

To confirm that the configuration is working properly, perform these tasks:

- [Verifying That the Private VLAN and Secondary VLANs Were Created on page 1514](#)

### *Verifying That the Private VLAN and Secondary VLANs Were Created*

**Purpose** Verify that the primary VLAN and secondary VLANs were properly created on the switch.

**Action** Use the `show vlans` command:

```
user@switch> show vlans pvlan100 extensive  
VLAN: pvlan100, Created at: Tue Sep 16 17:59:47 2008  
802.1Q Tag: 100, Internal index: 18, Admin State: Enabled, Origin: Static  
Private VLAN Mode: Primary  
Protocol: Port Mode  
Number of interfaces: Tagged 2 (Active = 0), Untagged 6 (Active = 0)  
    ge-0/0/0.0, tagged, trunk  
    ge-0/0/11.0, untagged, access  
    ge-0/0/12.0, untagged, access  
    ge-0/0/13.0, untagged, access  
    ge-0/0/14.0, untagged, access  
    ge-0/0/15.0, untagged, access  
    ge-0/0/16.0, untagged, access  
    ge-1/0/0.0, tagged, trunk  
Secondary VLANs: Isolated 2, Community 2  
Isolated VLANs :  
    __pvlan_pvlan_ge-0/0/15.0__  
    __pvlan_pvlan_ge-0/0/16.0__  
Community VLANs :  
    finance-comm  
    hr-comm  
  
user@switch> show vlans hr-comm extensive  
VLAN: hr-comm, Created at: Tue Sep 16 17:59:47 2008  
Internal index: 22, Admin State: Enabled, Origin: Static  
Private VLAN Mode: Community, Primary VLAN: pvlan100  
Protocol: Port Mode  
Number of interfaces: Tagged 2 (Active = 0), Untagged 2 (Active = 0)  
    ge-0/0/0.0, tagged, trunk  
    ge-0/0/11.0, untagged, access  
    ge-0/0/12.0, untagged, access  
    ge-1/0/0.0, tagged, trunk  
  
user@switch> show vlans finance-comm extensive  
VLAN: finance-comm, Created at: Tue Sep 16 17:59:47 2008  
Internal index: 21, Admin State: Enabled, Origin: Static  
Private VLAN Mode: Community, Primary VLAN: pvlan100  
Protocol: Port Mode  
Number of interfaces: Tagged 2 (Active = 0), Untagged 2 (Active = 0)  
    ge-0/0/0.0, tagged, trunk
```



```

ge-0/0/13.0, untagged, access
ge-0/0/14.0, untagged, access
ge-1/0/0.0, tagged, trunk

```

```

user@switch> show vlans __pvlan_pvlan_ge-0/0/15.0__ extensive
VLAN: __pvlan_pvlan_ge-0/0/15.0__, Created at: Tue Sep 16 17:59:47 2008
Internal index: 19, Admin State: Enabled, Origin: Static
Private VLAN Mode: Isolated, Primary VLAN: pvlan100
Protocol: Port Mode
Number of interfaces: Tagged 2 (Active = 0), Untagged 1 (Active = 0)
    ge-0/0/0.0, tagged, trunk
    ge-0/0/15.0, untagged, access
    ge-1/0/0.0, tagged, trunk

```

```

user@switch> show vlans __pvlan_pvlan_ge-0/0/16.0__ extensive
VLAN: __pvlan_pvlan_ge-0/0/16.0__, Created at: Tue Sep 16 17:59:47 2008
Internal index: 20, Admin State: Enabled, Origin: Static
Private VLAN Mode: Isolated, Primary VLAN: pvlan100
Protocol: Port Mode
Number of interfaces: Tagged 2 (Active = 0), Untagged 1 (Active = 0)
    ge-0/0/0.0, tagged, trunk
    ge-0/0/16.0, untagged, access
    ge-1/0/0.0, tagged, trunk

```

**Meaning** The output shows that the primary VLAN was created and identifies the interfaces and secondary VLANs associated with it.

- Related Documentation**
- [Understanding Private VLANs on page 1389](#)
  - [Understanding PVLAN Traffic Flows Across Multiple Switches on page 1395](#)
  - [Creating a Private VLAN on a Single Switch on page 1560](#)

## Example: Configuring a Private VLAN Spanning Multiple Switches

For security reasons, it is often useful to restrict the flow of broadcast and unknown unicast traffic and even to limit the communication between known hosts. The private VLAN (PVLAN) feature allows an administrator to split a broadcast domain into multiple isolated broadcast subdomains, essentially putting a VLAN inside a VLAN. A PVLAN can span multiple switches.

This example describes how to create a PVLAN spanning multiple switches. The example creates one primary PVLAN, containing multiple secondary VLANs:

- [Requirements on page 1515](#)
- [Overview and Topology on page 1516](#)
- [Configuring a PVLAN on Switch 1 on page 1519](#)
- [Configuring a PVLAN on Switch 2 on page 1521](#)
- [Configuring a PVLAN on Switch 3 on page 1524](#)
- [Verification on page 1525](#)

### Requirements

This example uses the following hardware and software components:



- Three QFX3500 devices
- Junos OS Release 12.1 or later for the QFX Series

Before you begin configuring a PVLAN, make sure you have created and configured the necessary VLANs. See [“Configuring VLANs” on page 1553](#).

### Overview and Topology

---

In a large office with multiple buildings and VLANs, you might need to isolate some workgroups or other endpoints for security reasons or to partition the broadcast domain. This configuration example shows how to create a PVLAN spanning multiple QFX devices, with one primary VLAN containing two community VLANs (one for HR and one for Finance), and an interswitch isolated VLAN (for the mail server, the backup server, and the CVS server). The PVLAN comprises three switches, two access switches and one distribution switch. The PVLAN is connected to a router through a promiscuous port, which is configured on the distribution switch.



**NOTE:** The isolated ports on Switch 1 and on Switch 2 do not have Layer 2 connectivity with one another even though they are included within the same domain. See [“Understanding Private VLANs” on page 1389](#).

[Figure 36 on page 1517](#) shows the topology for this example—two access switches connecting to a distribution switch, which has a connection (through a promiscuous port) to the router.



Figure 36: PVLAN Topology Spanning Multiple Switches

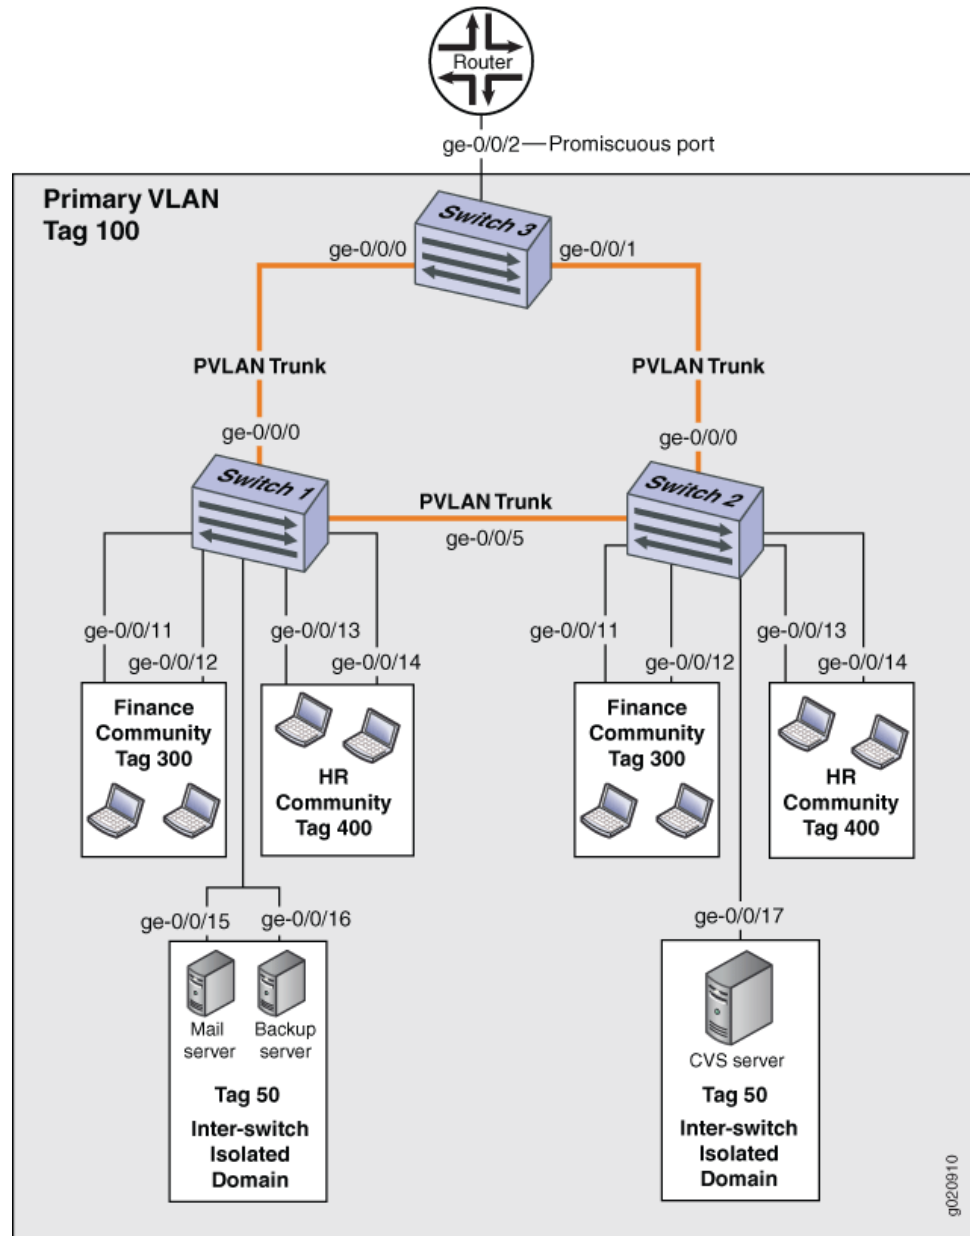


Table 119 on page 1518, Table 120 on page 1518, and Table 121 on page 1519 list the settings for the example topology.



**Table 119: Components of Switch 1 in the Topology for Configuring a PVLAN Spanning Multiple Devices**

| Property                              | Settings                                                                                                                            |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| VLAN names and tag IDs                | <b>primary-vlan</b> , tag 100<br><br><b>isolation-vlan-id</b> , tag 50<br><b>finance-comm</b> , tag 300<br><b>hr-comm</b> , tag 400 |
| PVLAN trunk interfaces                | <b>ge-0/0/0.0</b> , connects Switch 1 to Switch 3<br><br><b>ge-0/0/5.0</b> , connects Switch 1 to Switch 2                          |
| Isolated Interfaces in primary VLAN   | <b>ge-0/0/15.0</b> , mail server<br><br><b>ge-0/0/16.0</b> , backup server                                                          |
| Interfaces in VLAN <b>finance-com</b> | <b>ge-0/0/11.0</b><br><br><b>ge-0/0/12.0</b>                                                                                        |
| Interfaces in VLAN <b>hr-comm</b>     | <b>ge-0/0/13.0</b><br><br><b>ge-0/0/14.0</b>                                                                                        |

**Table 120: Components of Switch 2 in the Topology for Configuring a PVLAN Spanning Multiple Devices**

| Property                              | Settings                                                                                                                            |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| VLAN names and tag IDs                | <b>primary-vlan</b> , tag 100<br><br><b>isolation-vlan-id</b> , tag 50<br><b>finance-comm</b> , tag 300<br><b>hr-comm</b> , tag 400 |
| PVLAN trunk interfaces                | <b>ge-0/0/0.0</b> , connects Switch 2 to Switch 3<br><br><b>ge-0/0/5.0</b> , connects Switch 2 to Switch 1                          |
| Isolated Interface in primary VLAN    | <b>ge-0/0/17.0</b> , CVS server                                                                                                     |
| Interfaces in VLAN <b>finance-com</b> | <b>ge-0/0/11.0</b><br><br><b>ge-0/0/12.0</b>                                                                                        |
| Interfaces in VLAN <b>hr-comm</b>     | <b>ge-0/0/13.0</b><br><br><b>ge-0/0/14.0</b>                                                                                        |



Table 121: Components of Switch 3 in the Topology for Configuring a PVLAN Spanning Multiple Devices

| Property               | Settings                                                                                                                                                                                                                                                       |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| VLAN names and tag IDs | <b>primary-vlan</b> , tag 100<br><br><b>isolation-vlan-id</b> , tag 50<br><b>finance-comm</b> , tag 300<br><b>hr-comm</b> , tag 400                                                                                                                            |
| PVLAN trunk interfaces | <b>ge-0/0/0.0</b> , connects Switch 3 to Switch 1<br><br><b>ge-0/0/1.0</b> , connects Switch 3 to Switch 2                                                                                                                                                     |
| Promiscuous port       | <b>ge-0/0/2</b> , connects the PVLAN to the router<br><br><b>NOTE:</b> You must configure the trunk port that connects the PVLAN to another switch or router outside the PVLAN as a member of the PVLAN, which implicitly configures it as a promiscuous port. |

### Configuring a PVLAN on Switch 1

When configuring a PVLAN on multiple switches, these rules apply:

- The primary VLAN must be a tagged VLAN. We recommend that you configure the primary VLAN first.
- If you are going to configure a community VLAN ID, you must first configure the primary VLAN and the PVLAN trunk port. You must also configure the primary VLAN to be private using the **pvlan** statement.
- If you are going to configure an isolation VLAN ID, you must first configure the primary VLAN and the PVLAN trunk port.

#### CLI Quick Configuration

To quickly create and configure a PVLAN spanning multiple switches, copy the following commands and paste them into the terminal window of Switch 1:

```
[edit]
set vlans finance-comm vlan-id 300
set vlans finance-comm interface ge-0/0/11.0
set vlans finance-comm interface ge-0/0/12.0
set vlans finance-comm primary-vlan pvlan100
set vlans hr-comm vlan-id 400
set vlans hr-comm interface ge-0/0/13.0
set vlans hr-comm interface ge-0/0/14.0
set vlans hr-comm primary-vlan pvlan100
set vlans pvlan100 vlan-id 100
set vlans pvlan100 interface ge-0/0/15.0
set vlans pvlan100 interface ge-0/0/16.0
set vlans pvlan100 interface ge-0/0/0.0 pvlan-trunk
set vlans pvlan100 interface ge-0/0/5.0 pvlan-trunk
set vlans pvlan100 pvlan
set vlans pvlan100 pvlan isolation-vlan-id 50
set pvlan100 interface ge-0/0/15.0 isolated
set pvlan100 interface ge-0/0/16.0 isolated
```



**Step-by-Step  
Procedure**

1. Set the VLAN ID for the primary VLAN:  

```
[edit vlans]
user@switch# set pvlan100 vlan-id 100
```
2. Set the PVLAN trunk interfaces to connect this VLAN across neighboring switches:  

```
[edit vlans]
user@switch# set pvlan100 interface ge-0/0/0.0 pvlan-trunk
user@switch# set pvlan100 interface ge-0/0/5.0 pvlan-trunk
```
3. Set the primary VLAN to be private and have no local switching:  

```
[edit vlans]
user@switch# set pvlan100 pvlan
```
4. Set the VLAN ID for the **finance-comm** community VLAN that spans the switches:  

```
[edit vlans]
user@switch# set finance-comm vlan-id 300
```
5. Configure access interfaces for the **finance-comm** VLAN:  

```
[edit vlans]
user@switch# set finance-comm interface ge-0/0/11.0
user@switch# set finance-comm interface ge-0/0/12.0
```
6. Set the primary VLAN of this secondary community VLAN, **finance-comm** :  

```
[edit vlans]
user@switch# set vlans finance-comm primary-vlan pvlan100
```
7. Set the VLAN ID for the HR community VLAN that spans the switches.  

```
[edit vlans]
user@switch# set hr-comm vlan-id 400
```
8. Configure access interfaces for the **hr-comm** VLAN:  

```
[edit vlans]
user@switch# set hr-comm interface ge-0/0/13.0
user@switch# set hr-comm interface ge-0/0/14.0
```
9. Set the primary VLAN of this secondary community VLAN, **hr-comm**:  

```
[edit vlans]
user@switch# set vlans hr-comm primary-vlan pvlan100
```
10. Set the interswitch isolated ID to create an interswitch isolated domain that spans the switches:  

```
[edit vlans]
user@switch# set pvlan100 pvlan isolation-vlan-id 50
```
11. Configure the isolated interfaces in the primary VLAN:  

```
[edit vlans]
user@switch# set pvlan100 interface ge-0/0/15.0 isolated
user@switch# set pvlan100 interface ge-0/0/16.0 isolated
```



**NOTE:** When you configure an isolated port, include it as a member of the primary VLAN, but do not configure it as a member of any community VLAN.

**Results**

Check the results of the configuration:



```
[edit]
user@switch# show
vlangs {
  finance-comm {
    vlan-id 300;
    interface {
      ge-0/0/11.0;
      ge-0/0/12.0;
    }
    primary-vlan pvlan100;
  }
  hr-comm {
    vlan-id 400;
    interface {
      ge-0/0/13.0;
      ge-0/0/14.0;
    }
    primary-vlan pvlan100;
  }
  pvlan100 {
    vlan-id 100;
    interface {
      ge-0/0/15.0;
      ge-0/0/16.0;
      ge-0/0/0.0 {
        pvlan-trunk;
      }
      ge-0/0/5.0 {
        pvlan-trunk;
      }
    }
    pvlan;
    isolation-vlan-id 50;
  }
}
```

### Configuring a PVLAN on Switch 2

#### CLI Quick Configuration

To quickly create and configure a private VLAN spanning multiple switches, copy the following commands and paste them into the terminal window of Switch 2:



**NOTE:** The configuration of Switch 2 is the same as the configuration of Switch 1 except for the interface in the interswitch isolated domain. For Switch 2, the interface is ge-0/0/17.0.

```
[edit]
set vlans finance-comm vlan-id 300
set vlans finance-comm interface ge-0/0/11.0
set vlans finance-comm interface ge-0/0/12.0
set vlans finance-comm primary-vlan pvlan100
set vlans hr-comm vlan-id 400
set vlans hr-comm interface ge-0/0/13.0
```



```

set vlans hr-comm interface ge-0/0/14.0
set vlans hr-comm primary-vlan pvlan100
set vlans pvlan100 vlan-id 100
set vlans pvlan100 interface ge-0/0/17.0
set vlans pvlan100 interface ge-0/0/0.0 pvlan-trunk
set vlans pvlan100 interface ge-0/0/5.0 pvlan-trunk
set vlans pvlan100 pvlan
set vlans pvlan100 pvlan isolation-vlan-id 50
set pvlan100 interface ge-0/0/17.0 isolated

```

### Step-by-Step Procedure

To configure a PVLAN on Switch 2 that will span multiple switches:

1. Set the VLAN ID for the **finance-comm** community VLAN that spans the switches:  

```

[edit vlans]
user@switch# set finance-comm vlan-id 300

```
2. Configure access interfaces for the **finance-comm** VLAN:  

```

[edit vlans]
user@switch# set finance-comm interface ge-0/0/11.0
user@switch# set finance-comm interface ge-0/0/12.0

```
3. Set the primary VLAN of this secondary community VLAN, **finance-comm**:  

```

[edit vlans]
user@switch# set vlans finance-comm primary-vlan pvlan100

```
4. Set the VLAN ID for the HR community VLAN that spans the switches.  

```

[edit vlans]
user@switch# set hr-comm vlan-id 400

```
5. Configure access interfaces for the **hr-comm** VLAN:  

```

[edit vlans]
user@switch# set hr-comm interface ge-0/0/13.0
user@switch# set hr-comm interface ge-0/0/14.0

```
6. Set the primary VLAN of this secondary community VLAN, **hr-comm**:  

```

[edit vlans]
user@switch# set vlans hr-comm primary-vlan pvlan100

```
7. Set the VLAN ID for the primary VLAN:  

```

[edit vlans]
user@switch# set pvlan100 vlan-id 100

```
8. Set the PVLAN trunk interfaces that will connect this VLAN across neighboring switches:  

```

[edit vlans]
user@switch# set pvlan100 interface ge-0/0/0.0 pvlan-trunk
user@switch# set pvlan100 interface ge-0/0/5.0 pvlan-trunk

```
9. Set the primary VLAN to be private and have no local switching:  

```

[edit vlans]
user@switch# set pvlan100 pvlan

```
10. Set the interswitch isolated ID to create an interswitch isolated domain that spans the switches:  

```

[edit vlans]
user@switch# set pvlan100 pvlan isolation-vlan-id 50

```





**NOTE:** To configure an isolated port, include it as one of the members of the primary VLAN, but do not configure it as belonging to one of the community VLANs.

11. Configure the isolated interface in the primary VLAN:

```
[edit vlans]
user@switch# set pvlan100 interface ge-0/0/17.0 isolated
```

### Results

Check the results of the configuration:

```
[edit]
user@switch# show
vlans {
  finance-comm {
    vlan-id 300;
    interface {
      ge-0/0/11.0;
      ge-0/0/12.0;
    }
    primary-vlan pvlan100;
  }
  hr-comm {
    vlan-id 400;
    interface {
      ge-0/0/13.0;
      ge-0/0/14.0;
    }
    primary-vlan pvlan100;
  }
  pvlan100 {
    vlan-id 100;
    interface {
      ge-0/0/15.0;
      ge-0/0/16.0;
      ge-0/0/0.0 {
        pvlan-trunk;
      }
      ge-0/0/5.0 {
        pvlan-trunk;
      }
      ge-0/0/17.0;
    }
    pvlan;
    isolation-vlan-id 50;
  }
}
```



### Configuring a PVLAN on Switch 3

**CLI Quick Configuration** To quickly configure Switch 3 to function as the distribution switch of this PVLAN, copy the following commands and paste them into the terminal window of Switch 3:



**NOTE:** Interface ge-0/0/2.0 is a trunk port connecting the PVLAN to a router.

```
[edit]
set vlans finance-comm vlan-id 300
set vlans finance-comm primary-vlan pvlan100
set vlans hr-comm vlan-id 400
set vlans hr-comm primary-vlan pvlan100
set vlans pvlan100 vlan-id 100
set vlans pvlan100 interface ge-0/0/0.0 pvlan-trunk
set vlans pvlan100 interface ge-0/0/1.0 pvlan-trunk
set vlans pvlan100 pvlan
set vlans pvlan100 pvlan isolation-vlan-id 50
```

**Step-by-Step Procedure** To configure Switch 3 to function as the distribution switch for this PVLAN, use the following procedure:

- Set the VLAN ID for the **finance-comm** community VLAN that spans the switches:  

```
[edit vlans]
user@switch# set vlans finance-comm vlan-id 300
```
- Set the primary VLAN of this secondary community VLAN, **finance-comm**:  

```
[edit vlans]
user@switch# set vlans finance-comm primary-vlan pvlan100
```
- Set the VLAN ID for the HR community VLAN that spans the switches:  

```
[edit vlans]
user@switch# set vlans hr-comm vlan-id 400
```
- Set the primary VLAN of this secondary community VLAN, **hr-comm**:  

```
[edit vlans]
user@switch# set vlans hr-comm primary-vlan pvlan100
```
- Set the VLAN ID for the primary VLAN:  

```
[edit vlans]
user@switch# set pvlan100 vlan-id 100
```
- Set the PVLAN trunk interfaces that will connect this VLAN across neighboring switches:  

```
[edit vlans]
user@switch# set pvlan100 interface ge-0/0/0.0 pvlan-trunk
user@switch# set pvlan100 interface ge-0/0/5.0 pvlan-trunk
```
- Set the primary VLAN to be private and have no local switching:  

```
[edit vlans]
user@switch# set pvlan100 pvlan
```
- Set the interswitch isolated ID to create an interswitch isolated domain that spans the switches:  

```
[edit vlans]
user@switch# set pvlan100 pvlan isolation-vlan-id 50
```





**NOTE:** To configure an isolated port, include it as one of the members of the primary VLAN, but do not configure it as belonging to one of the community VLANs.

## Results

Check the results of the configuration:

```
[edit]
user@switch# show
vlands {
  finance-comm {
    vlan-id 300;
    primary-vlan pvlan100;
  }
  hr-comm {
    vlan-id 400;
    primary-vlan pvlan100;
  }
  pvlan100 {
    vlan-id 100;
    interface {
      ge-0/0/0.0 {
        pvlan-trunk;
      }
      ge-0/0/1.0 {
        pvlan-trunk;
      }
      ge-0/0/2.0;
    }
    pvlan;
    isolation-vlan-id 50;
  }
}
```

## Verification

To confirm that the configuration is working properly, perform these tasks:

- [Verifying That the Primary VLAN and Secondary VLANs Were Created on Switch 1 on page 1525](#)
- [Verifying That the Primary VLAN and Secondary VLANs Were Created on Switch 2 on page 1527](#)
- [Verifying That the Primary VLAN and Secondary VLANs Were Created on Switch 3 on page 1528](#)

### *Verifying That the Primary VLAN and Secondary VLANs Were Created on Switch 1*

**Purpose** Verify that the PVLAN configuration spanning multiple switches is working properly on Switch 1:



**Action** Use the **show vlans extensive** command:

```

user@switch> show vlans extensive
VLAN: __pvlan_pvlan100_ge-0/0/15.0__, Created at: Thu Sep 16 23:15:27 2010
Internal index: 5, Admin State: Enabled, Origin: Static
Private VLAN Mode: Isolated, Primary VLAN: pvlan100
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 2 (Active = 2), Untagged 1 (Active = 1)
    ge-0/0/0.0*, tagged, trunk, pvlan-trunk
    ge-0/0/5.0*, tagged, trunk, pvlan-trunk
    ge-0/0/15.0*, untagged, access

VLAN: __pvlan_pvlan100_ge-0/0/16.0__, Created at: Thu Sep 16 23:15:27 2010
Internal index: 6, Admin State: Enabled, Origin: Static
Private VLAN Mode: Isolated, Primary VLAN: pvlan100
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 2 (Active = 2), Untagged 1 (Active = 1)
    ge-0/0/0.0*, tagged, trunk, pvlan-trunk
    ge-0/0/5.0*, tagged, trunk, pvlan-trunk
    ge-0/0/16.0*, untagged, access

VLAN: __pvlan_pvlan100_isiv__, Created at: Thu Sep 16 23:15:27 2010
802.1Q Tag: 50, Internal index: 7, Admin State: Enabled, Origin: Static
Private VLAN Mode: Inter-switch-isolated, Primary VLAN: pvlan100
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 2 (Active = 2), Untagged 0 (Active = 0)
    ge-0/0/0.0*, tagged, trunk, pvlan-trunk
    ge-0/0/5.0*, tagged, trunk, pvlan-trunk

VLAN: default, Created at: Thu Sep 16 03:03:18 2010
Internal index: 2, Admin State: Enabled, Origin: Static
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 0 (Active = 0), Untagged 0 (Active = 0)

VLAN: finance-comm, Created at: Thu Sep 16 23:15:27 2010
802.1Q Tag: 300, Internal index: 8, Admin State: Enabled, Origin: Static
Private VLAN Mode: Community, Primary VLAN: pvlan100
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 2 (Active = 2), Untagged 2 (Active = 2)
    ge-0/0/0.0*, tagged, trunk, pvlan-trunk
    ge-0/0/5.0*, tagged, trunk, pvlan-trunk
    ge-0/0/11.0*, untagged, access
    ge-0/0/12.0*, untagged, access

VLAN: hr-comm, Created at: Thu Sep 16 23:15:27 2010
802.1Q Tag: 400, Internal index: 9, Admin State: Enabled, Origin: Static
Private VLAN Mode: Community, Primary VLAN: pvlan100
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 2 (Active = 2), Untagged 2 (Active = 2)
    ge-0/0/0.0*, tagged, trunk, pvlan-trunk
    ge-0/0/5.0*, tagged, trunk, pvlan-trunk
    ge-0/0/13.0*, untagged, access
    ge-0/0/14.0*, untagged, access

VLAN: pvlan100, Created at: Thu Sep 16 23:15:27 2010
802.1Q Tag: 100, Internal index: 4, Admin State: Enabled, Origin: Static
Private VLAN Mode: Primary
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 2 (Active = 2), Untagged 6 (Active = 6)
    ge-0/0/0.0*, tagged, trunk, pvlan-trunk
    ge-0/0/5.0*, tagged, trunk, pvlan-trunk

```



```

ge-0/0/11.0*, untagged, access
ge-0/0/12.0*, untagged, access
ge-0/0/13.0*, untagged, access
ge-0/0/14.0*, untagged, access
ge-0/0/15.0*, untagged, access
ge-0/0/16.0*, untagged, access
Secondary VLANs: Isolated 2, Community 2, Inter-switch-isolated 1
Isolated VLANs :
__pvlan_pvlan100_ge-0/0/15.0__
__pvlan_pvlan100_ge-0/0/16.0__
Community VLANs :
  finance-comm
  hr-comm
Inter-switch-isolated VLAN :
__pvlan_pvlan100_isiv__

```

**Meaning** The output shows that a PVLAN was created on Switch 1 and shows that it includes two isolated VLANs, two community VLANs, and an interswitch isolated VLAN. The presence of the pvlan-trunk and Inter-switch-isolated fields indicates that this PVLAN is spanning more than one switch.

#### *Verifying That the Primary VLAN and Secondary VLANs Were Created on Switch 2*

**Purpose** Verify that the PVLAN configuration spanning multiple switches is working properly on Switch 2:

**Action** Use the `show vlans extensive` command:

```

user@switch> show vlans extensive
VLAN: __pvlan_pvlan100_ge-0/0/17.0__, Created at: Thu Sep 16 23:19:22 2010
Internal index: 5, Admin State: Enabled, Origin: Static
Private VLAN Mode: Isolated, Primary VLAN: pvlan100
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 2 (Active = 2), Untagged 1 (Active = 1)
  ge-0/0/0.0*, tagged, trunk, pvlan-trunk
  ge-0/0/5.0*, tagged, trunk, pvlan-trunk
  ge-0/0/17.0*, untagged, access

VLAN: __pvlan_pvlan100_isiv__, Created at: Thu Sep 16 23:19:22 2010
802.1Q Tag: 50, Internal index: 6, Admin State: Enabled, Origin: Static
Private VLAN Mode: Inter-switch-isolated, Primary VLAN: pvlan100
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 2 (Active = 2), Untagged 0 (Active = 0)
  ge-0/0/0.0*, tagged, trunk, pvlan-trunk
  ge-0/0/5.0*, tagged, trunk, pvlan-trunk

VLAN: default, Created at: Thu Sep 16 03:03:18 2010
Internal index: 2, Admin State: Enabled, Origin: Static
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 0 (Active = 0), Untagged 0 (Active = 0)

VLAN: finance-comm, Created at: Thu Sep 16 23:19:22 2010
802.1Q Tag: 300, Internal index: 7, Admin State: Enabled, Origin: Static
Private VLAN Mode: Community, Primary VLAN: pvlan100
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 2 (Active = 2), Untagged 2 (Active = 2)
  ge-0/0/0.0*, tagged, trunk, pvlan-trunk
  ge-0/0/5.0*, tagged, trunk, pvlan-trunk
  ge-0/0/11.0*, untagged, access

```



```
ge-0/0/12.0*, untagged, access
```

```
VLAN: hr-comm, Created at: Thu Sep 16 23:19:22 2010
802.1Q Tag: 400, Internal index: 8, Admin State: Enabled, Origin: Static
Private VLAN Mode: Community, Primary VLAN: pvlan100
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 2 (Active = 2), Untagged 2 (Active = 2)
    ge-0/0/0.0*, tagged, trunk, pvlan-trunk
    ge-0/0/5.0*, tagged, trunk, pvlan-trunk
    ge-0/0/13.0*, untagged, access
    ge-0/0/14.0*, untagged, access
```

```
VLAN: pvlan100, Created at: Thu Sep 16 23:19:22 2010
802.1Q Tag: 100, Internal index: 4, Admin State: Enabled, Origin: Static
Private VLAN Mode: Primary
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 2 (Active = 2), Untagged 5 (Active = 5)
    ge-0/0/0.0*, tagged, trunk, pvlan-trunk
    ge-0/0/5.0*, tagged, trunk, pvlan-trunk
    ge-0/0/11.0*, untagged, access
    ge-0/0/12.0*, untagged, access
    ge-0/0/13.0*, untagged, access
    ge-0/0/14.0*, untagged, access
    ge-0/0/17.0*, untagged, access
Secondary VLANs: Isolated 1, Community 2, Inter-switch-isolated 1
Isolated VLANs :
    __pvlan_pvlan100_ge-0/0/17.0__
Community VLANs :
    finance-comm
    hr-comm
Inter-switch-isolated VLAN :
    __pvlan_pvlan100_isiv__
```

**Meaning** The output shows that a PVLAN was created on Switch 2 and shows that it includes one isolated VLAN, two community VLANs, and an interswitch isolated VLAN. The presence of the pvlan-trunk and Inter-switch-isolated fields indicates that this PVLAN is spanning more than one switch. When you compare this output to the output of Switch 1, you can see that both switches belong to the same PVLAN (**pvlan100**).

### *Verifying That the Primary VLAN and Secondary VLANs Were Created on Switch 3*

**Purpose** Verify that the PVLAN configuration spanning multiple switches is working properly on Switch 3:

**Action** Use the **show vlans extensive** command:

```
user@switch> show vlans extensive
VLAN: __pvlan_pvlan100_isiv__, Created at: Thu Sep 16 23:22:40 2010
802.1Q Tag: 50, Internal index: 5, Admin State: Enabled, Origin: Static
Private VLAN Mode: Inter-switch-isolated, Primary VLAN: pvlan100
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 2 (Active = 2), Untagged 0 (Active = 0)
    ge-0/0/0.0*, tagged, trunk, pvlan-trunk
    ge-0/0/1.0*, tagged, trunk, pvlan-trunk

VLAN: default, Created at: Thu Sep 16 03:03:18 2010
Internal index: 2, Admin State: Enabled, Origin: Static
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 0 (Active = 0), Untagged 0 (Active = 0)
```



```

VLAN: finance-comm, Created at: Thu Sep 16 23:22:40 2010
802.1Q Tag: 300, Internal index: 6, Admin State: Enabled, Origin: Static
Private VLAN Mode: Community, Primary VLAN: pvlan100
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 2 (Active = 2), Untagged 0 (Active = 0)
    ge-0/0/0.0*, tagged, trunk, pvlan-trunk
    ge-0/0/1.0*, tagged, trunk, pvlan-trunk

VLAN: hr-comm, Created at: Thu Sep 16 23:22:40 2010
802.1Q Tag: 400, Internal index: 7, Admin State: Enabled, Origin: Static
Private VLAN Mode: Community, Primary VLAN: pvlan100
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 2 (Active = 2), Untagged 0 (Active = 0)
    ge-0/0/0.0*, tagged, trunk, pvlan-trunk
    ge-0/0/1.0*, tagged, trunk, pvlan-trunk

VLAN: pvlan100, Created at: Thu Sep 16 23:22:40 2010
802.1Q Tag: 100, Internal index: 4, Admin State: Enabled, Origin: Static
Private VLAN Mode: Primary
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 2 (Active = 2), Untagged 0 (Active = 0)
    ge-0/0/0.0*, tagged, trunk, pvlan-trunk
    ge-0/0/1.0*, tagged, trunk, pvlan-trunk
Secondary VLANs: Isolated 0, Community 2, Inter-switch-isolated 1
Community VLANs :
    finance-comm
    hr-comm
Inter-switch-isolated VLAN :
    __pvlan_pvlan100_isiv__

```

**Meaning** The output shows that the PVLAN (**pvlan100**) is configured on Switch 3 and that it includes no isolated VLANs, two community VLANs, and an interswitch isolated VLAN. But Switch 3 is functioning as a distribution switch, so the output does not include access interfaces within the PVLAN. It shows only the **pvlan-trunk** interfaces that connect **pvlan100** from Switch 3 to the other switches (Switch 1 and Switch 2) in the same PVLAN.

**Related Documentation**

- [Understanding Private VLANs on page 1389](#)
- [Understanding PVLAN Traffic Flows Across Multiple Switches on page 1395](#)
- [Example: Configuring a Private VLAN on a Single Switch on page 1510](#)

## Example: Configuring PVLANS with Secondary VLAN Trunk Ports and Promiscuous Access Ports

This example shows how to configure secondary VLAN trunk ports and promiscuous access ports as part of a private VLAN configuration. Secondary VLAN trunk ports carry secondary VLAN traffic.

For a given private VLAN, a secondary VLAN trunk port can carry traffic for only one secondary VLAN. However, a secondary VLAN trunk port can carry traffic for multiple secondary VLANs as long as each secondary VLAN is a member of a different private (primary) VLAN. For example, a secondary VLAN trunk port can carry traffic for a community VLAN that is part of primary VLAN **pvlan100** and also carry traffic for an isolated VLAN that is part of primary VLAN **pvlan400**.



To configure a trunk port to carry secondary VLAN traffic, use the **isolated** and **interface** statements, as shown in steps 12 and 13 of the example configuration for Switch 1.



**NOTE:** When traffic egresses from a secondary VLAN trunk port, it normally carries the tag of the primary VLAN that the secondary port is a member of. If you want traffic that egresses from a secondary VLAN trunk port to retain its secondary VLAN tag, use the **extend-secondary-vlan-id** statement.

A promiscuous access port carries untagged traffic and can be a member of only one primary VLAN. Traffic that ingresses on a promiscuous access port is forwarded to the ports of the secondary VLANs that are members of the primary VLAN that the promiscuous access port is a member of. This traffic carries the appropriate secondary VLAN tags when it egresses from the secondary VLAN ports if the secondary VLAN port is a trunk port.

To configure an access port to be promiscuous, use the **promiscuous** statement, as shown in step Figure 27 on page 1407 of the example configuration for Switch 2.

If traffic ingresses on a secondary VLAN port and egresses on a promiscuous access port, the traffic is untagged on egress. If tagged traffic ingresses on a promiscuous access port, the traffic is discarded.

- [Requirements on page 1530](#)
- [Overview and Topology on page 1530](#)
- [Configuring the PVLANS on Switch 1 on page 1532](#)
- [Configuring the PVLANS on Switch 2 on page 1536](#)
- [Verification on page 1540](#)

---

## Requirements

This example uses the following hardware and software components:

- Two QFX devices
- Junos OS Release 12.2 or later for the QFX Series

---

## Overview and Topology

Figure 37 on page 1531 shows the topology used in this example. Switch 1 includes several primary and secondary private VLANs and also includes two secondary VLAN trunk ports configured to carry secondary VLANs that are members of primary VLANs pvlan100 and pvlan400.

Switch 2 includes the same private VLANs. The figure shows xe-0/0/0 on Switch 2 as configured with promiscuous access ports or promiscuous trunk ports. The example configuration included here configures this port as a promiscuous access port.

The figure also shows how traffic would flow after ingressing on the secondary VLAN trunk ports on Switch 1.



**Figure 37: PVLAN Topology with Secondary VLAN Trunk Ports and Promiscuous Access Port**

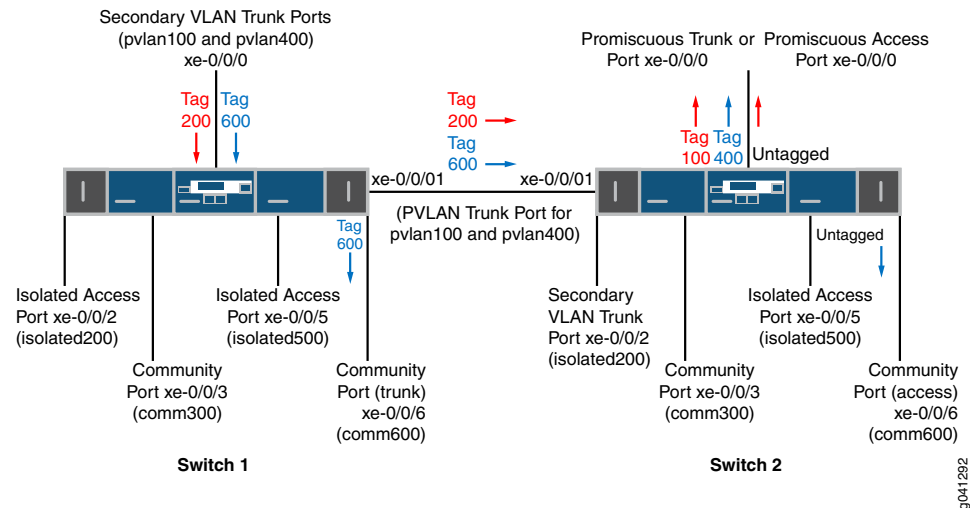


Table 122 on page 1531 and Table 123 on page 1532 list the settings for the example topology on both switches.

**Table 122: Components of the Topology for Configuring a Secondary VLAN Trunk on Switch 1**

| Component             | Description                                                       |
|-----------------------|-------------------------------------------------------------------|
| pvlan100, ID 100      | Primary VLAN                                                      |
| pvlan400, ID 400      | Primary VLAN                                                      |
| comm300, ID 300       | Community VLAN, member of pvlan100                                |
| comm600, ID 600       | Community VLAN, member of pvlan400                                |
| isolation-vlan-id 200 | VLAN ID for isolated VLAN, member of pvlan100                     |
| isolation-vlan-id 500 | VLAN ID for isolated VLAN, member of pvlan400                     |
| xe-0/0/0.0            | Secondary VLAN trunk port for primary VLANs pvlan100 and pvlan400 |
| xe-0/0/1.0            | PVLAN trunk port for primary VLANs pvlan100 and pvlan400          |
| xe-0/0/2.0            | Isolated access port for pvlan100                                 |
| xe-0/0/3.0            | Community access port for comm300                                 |
| xe-0/0/5.0            | Isolated access port for pvlan400                                 |
| xe-0/0/6.0            | Community trunk port for comm600                                  |



Table 123: Components of the Topology for Configuring a Secondary VLAN Trunk on Switch 2

| Component             | Description                                                |
|-----------------------|------------------------------------------------------------|
| pvlan100, ID 100      | Primary VLAN                                               |
| pvlan400, ID 400      | Primary VLAN                                               |
| comm300, ID 300       | Community VLAN, member of pvlan100                         |
| comm600, ID 600       | Community VLAN, member of pvlan400                         |
| isolation-vlan-id 200 | VLAN ID for isolated VLAN, member of pvlan100              |
| isolation-vlan-id 500 | VLAN ID for isolated VLAN, member of pvlan400              |
| xe-0/0/0.0            | Promiscuous access port for primary VLANs pvlan100         |
| xe-0/0/1.0            | PVLAN trunk port for primary VLANs pvlan100 and pvlan400   |
| xe-0/0/2.0            | Secondary trunk port for isolated VLAN, member of pvlan100 |
| xe-0/0/3.0            | Community access port for comm300                          |
| xe-0/0/5.0            | Isolated access port for pvlan400                          |
| xe-0/0/6.0            | Community access port for comm600                          |

### Configuring the PVLANS on Switch 1

#### CLI Quick Configuration

To quickly create and configure the PVLANS on Switch 1, copy the following commands and paste them into a switch terminal window:

```
[edit]
set interfaces xe-0/0/0 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/1 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/1 unit 0 family ethernet-switching vlan members pvlan100
set interfaces xe-0/0/1 unit 0 family ethernet-switching vlan members pvlan400
set interfaces xe-0/0/2 unit 0 family ethernet-switching port-mode access
set interfaces xe-0/0/3 unit 0 family ethernet-switching port-mode access
set interfaces xe-0/0/5 unit 0 family ethernet-switching port-mode access
set interfaces xe-0/0/6 unit 0 family ethernet-switching port-mode trunk
set vlans pvlan100 vlan-id 100
set vlans pvlan400 vlan-id 400
set vlans pvlan100 pvlan
set vlans pvlan400 pvlan
set vlans pvlan100 interface xe-0/0/1.0 pvlan-trunk
set vlans pvlan400 interface xe-0/0/1.0 pvlan-trunk
set vlans comm300 vlan-id 300
set vlans comm300 primary-vlan pvlan100
set vlans comm300 interface xe-0/0/3.0
set vlans comm600 vlan-id 600
set vlans comm600 primary-vlan pvlan400
set vlans comm600 interface xe-0/0/6.0
set vlans pvlan100 pvlan isolation-vlan-id 200
```



```

set vlans pvlan400 pvlan isolation-vlan-id 500
set vlans pvlan100 interface xe-0/0/0.0 isolated
set vlans pvlan400 interface xe-0/0/0.0 isolated
set vlans comm600 interface xe-0/0/0.0
set vlans pvlan100 interface xe-0/0/2.0 isolated
set vlans pvlan400 interface xe-0/0/5.0 isolated

```

### Step-by-Step Procedure

To configure the private VLANs and secondary VLAN trunk ports:

1. Configure the interfaces and port modes:

[edit interfaces]

```

user@switch# set xe-0/0/0 unit 0 family ethernet-switching port-mode trunk
user@switch# set xe-0/0/1 unit 0 family ethernet-switching port-mode trunk
user@switch# set xe-0/0/1 unit 0 family ethernet-switching vlan members pvlan100
user@switch# set xe-0/0/1 unit 0 family ethernet-switching vlan members pvlan400
user@switch# set xe-0/0/2 unit 0 family ethernet-switching port-mode access
user@switch# set xe-0/0/3 unit 0 family ethernet-switching port-mode access
user@switch# set xe-0/0/5 unit 0 family ethernet-switching port-mode access
user@switch# set xe-0/0/6 unit 0 family ethernet-switching port-mode access

```

2. Create the primary VLANs:

[edit vlans]

```

user@switch# set pvlan100 vlan-id 100
user@switch# set pvlan400 vlan-id 400

```



**NOTE:** Primary VLANs must always be tagged VLANs, even if they exist on only one device.

3. Configure the primary VLANs to be private:

[edit vlans]

```

user@switch# set pvlan100 pvlan
user@switch# set pvlan400 pvlan

```

4. Configure the PVLAN trunk port to carry the private VLAN traffic between the switches:

[edit vlans]

```

user@switch# set pvlan100 interface xe-0/0/1.0 pvlan-trunk
user@switch# set pvlan400 interface xe-0/0/1.0 pvlan-trunk

```

5. Create secondary VLAN comm300 with VLAN ID 300:

[edit vlans]

```

user@switch# set comm300 vlan-id 300

```

6. Configure the primary VLAN for comm300:

[edit vlans]

```

user@switch# set comm300 primary-vlan pvlan100

```

7. Configure the interface for comm300:

[edit vlans]

```

user@switch# set comm300 interface xe-0/0/3.0

```

8. Create secondary VLAN comm600 with VLAN ID 600:

[edit vlans]

```

user@switch# set comm600 vlan-id 600

```

9. Configure the primary VLAN for comm600:



- ```
[edit vlans]
user@switch# set comm600 primary-vlan pvlan400
```
10. Configure the interface for comm600:
- ```
[edit vlans]
user@switch# set comm600 interface xe-0/0/6.0
```
11. Configure the interswitch isolated VLANs:
- ```
[edit vlans]
user@switch# set pvlan100 pvlan isolation-vlan-id 200
user@switch# set pvlan400 pvlan isolation-vlan-id 500
```



**NOTE:** When you configure a secondary VLAN trunk port to carry an isolated VLAN, you must also configure an **isolation-vlan-id**. This is true even if the isolated VLAN exists only on one switch.

12. Enable trunk port xe-0/0/0 to carry secondary VLANs for the primary VLANs:
- ```
[edit vlans]
user@switch# set pvlan100 interface xe-0/0/0.0 isolated
user@switch# set pvlan400 interface xe-0/0/0.0 isolated
```
13. Configure trunk port xe-0/0/0 to carry comm600 (member of pvlan400):
- ```
[edit vlans]
user@switch# set comm600 interface xe-0/0/0.0
```



**NOTE:** You do not need to explicitly configure xe-0/0/0 to carry the isolated VLAN traffic (tags 200 and 500) because all the isolated ports in pvlan100 and pvlan400—including xe-0/0/0.0—are automatically included in the isolated VLANs created when you configured **isolation-vlan-id 200** and **isolation-vlan-id 500**.

14. Configure xe-0/0/2 and xe-0/0/6 to be isolated:
- ```
[edit vlans]
user@switch# set pvlan100 interface xe-0/0/2.0 isolated
user@switch# set pvlan400 interface xe-0/0/5.0 isolated
```

## Results

Check the results of the configuration on Switch 1:

```
[edit]
user@switch# show
interfaces {
  xe-0/0/0 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members pvlan100;
          members pvlan400;
        }
      }
    }
  }
}
```



```

    }
  }
}
xe-0/0/1 {
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
        members pvlan100;
        members pvlan400;
      }
    }
  }
}
xe-0/0/2 {
  unit 0 {
    family ethernet-switching {
      port-mode access;
    }
  }
}
xe-0/0/3 {
  unit 0 {
    family ethernet-switching {
      port-mode access;
    }
  }
}
xe-0/0/5 {
  unit 0 {
    family ethernet-switching {
      port-mode access;
    }
  }
}
xe-0/0/6 {
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
    }
  }
}
}
vllans {
  comm300 {
    vlan-id 300;
    interface {
      xe-0/0/3.0;
    }
    primary-vlan pvlan100;
  }
  comm600 {
    vlan-id 600;
    interface {
      xe-0/0/6.0;
    }
  }
}

```



```
        primary-vlan pvlan400;
    }
    pvlan100 {
        vlan-id 100;
        interface {
            xe-0/0/0.0;
            xe-0/0/2.0;
            xe-0/0/3.0;
            xe-0/0/1.0 {
                pvlan-trunk;
            }
        }
        no-local-switching;
        isolation-id 200;
    }
    pvlan400 {
        vlan-id 400;
        interface {
            xe-0/0/0.0;
            xe-0/0/5.0;
            xe-0/0/6.0;
            xe-0/0/1.0 {
                pvlan-trunk;
            }
        }
        no-local-switching;
        isolation-id 500;
    }
}
```

---

### Configuring the PVLANS on Switch 2

The configuration for Switch 2 is almost identical to the configuration for Switch 1. The most significant difference is that xe-0/0/0 on Switch 2 is configured as a promiscuous trunk port or a promiscuous access port, as [Figure 37 on page 1531](#) shows. In the following configuration, xe-0/0/0 is configured as a promiscuous access port for primary VLAN pvlan100.

If traffic ingresses on VLAN-enabled port and egresses on a promiscuous access port, the VLAN tags are dropped on egress and the traffic is untagged at that point. For example, traffic for comm600 ingresses on the secondary VLAN trunk port configured on xe-0/0/0.0 on Switch 1 and carries tag 600 as it is forwarded through the secondary VLAN. When it egresses from xe-0/0/0.0 on Switch 2, it will be untagged if you configure xe-0/0/0.0 as a promiscuous access port as shown in this example. If you instead configure xe-0/0/0.0 as a promiscuous trunk port (port-mode trunk), the traffic for comm600 carries its primary VLAN tag (400) when it egresses.

#### CLI Quick Configuration

To quickly create and configure the PVLANS on Switch 2, copy the following commands and paste them into a switch terminal window:

```
[edit]
set interfaces xe-0/0/0 unit 0 family ethernet-switching port-mode access
set interfaces xe-0/0/1 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/1 unit 0 family ethernet-switching vlan members pvlan100
set interfaces xe-0/0/1 unit 0 family ethernet-switching vlan members pvlan400
```



```

set interfaces xe-0/0/2 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/3 unit 0 family ethernet-switching port-mode access
set interfaces xe-0/0/5 unit 0 family ethernet-switching port-mode access
set interfaces xe-0/0/6 unit 0 family ethernet-switching port-mode access
set vlans pvlan100 vlan-id 100
set vlans pvlan400 vlan-id 400
set vlans pvlan100 pvlan
set vlans pvlan400 pvlan
set vlans pvlan100 interface xe-0/0/1.0 pvlan-trunk
set vlans pvlan400 interface xe-0/0/1.0 pvlan-trunk
set vlans comm300 vlan-id 300
set vlans comm300 primary-vlan pvlan100
set vlans comm300 interface xe-0/0/3.0
set vlans comm600 vlan-id 600
set vlans comm600 primary-vlan pvlan400
set vlans comm600 interface xe-0/0/6.0
set vlans pvlan100 pvlan isolation-vlan-id 200
set vlans pvlan400 pvlan isolation-vlan-id 500
set vlans pvlan100 interface xe-0/0/0.0 promiscuous
set vlans pvlan100 interface xe-0/0/2.0 isolated
set vlans pvlan400 interface xe-0/0/5.0 isolated

```

#### Step-by-Step Procedure

To configure the private VLANs and secondary VLAN trunk ports:

1. Configure the interfaces and port modes:
 

```

[edit interfaces]
user@switch# set xe-0/0/0 unit 0 family ethernet-switching port-mode access
user@switch# set xe-0/0/1 unit 0 family ethernet-switching port-mode trunk
user@switch# set xe-0/0/1 unit 0 family ethernet-switching vlan members pvlan100
user@switch# set xe-0/0/1 unit 0 family ethernet-switching vlan members pvlan400
user@switch# set xe-0/0/2 unit 0 family ethernet-switching port-mode trunk
user@switch# set xe-0/0/3 unit 0 family ethernet-switching port-mode access
user@switch# set xe-0/0/5 unit 0 family ethernet-switching port-mode access
user@switch# set xe-0/0/6 unit 0 family ethernet-switching port-mode access

```
2. Create the primary VLANs:
 

```

[edit vlans]
user@switch# set pvlan100 vlan-id 100
user@switch# set pvlan400 vlan-id 400

```
3. Configure the primary VLANs to be private:
 

```

[edit vlans]
user@switch# set pvlan100 pvlan
user@switch# set pvlan400 pvlan

```
4. Configure the PVLAN trunk port to carry the private VLAN traffic between the switches:
 

```

[edit vlans]
user@switch# set pvlan100 interface xe-0/0/1.0 pvlan-trunk
user@switch# set pvlan400 interface xe-0/0/1.0 pvlan-trunk

```
5. Create secondary VLAN comm300 with VLAN ID 300:
 

```

[edit vlans]
user@switch# set comm300 vlan-id 300

```
6. Configure the primary VLAN for comm300:
 

```

[edit vlans]
user@switch# set comm300 primary-vlan pvlan100

```
7. Configure the interface for comm300:



- ```
[edit vlans]
user@switch# set comm300 interface xe-0/0/3.0
```
8. Create secondary VLAN comm600 with VLAN ID 600:
 

```
[edit vlans]
user@switch# set comm600 vlan-id 600
```
  9. Configure the primary VLAN for comm600:
 

```
[edit vlans]
user@switch# set comm600 primary-vlan pvlan400
```
  10. Configure the interface for comm600:
 

```
[edit vlans]
user@switch# set comm600 interface xe-0/0/6.0
```
  11. Configure the interswitch isolated VLANs:
 

```
[edit vlans]
user@switch# set pvlan100 pvlan isolation-vlan-id 200
user@switch# set pvlan400 pvlan isolation-vlan-id 500
```
  12. Configure access port xe-0/0/0 to be promiscuous for pvlan100:
 

```
[edit vlans]
user@switch# set pvlan100 interface xe-0/0/0.0 promiscuous
```



**NOTE:** A promiscuous access port can be a member of only one primary VLAN.

13. Configure xe-0/0/2 and xe-0/0/6 to be isolated:
 

```
[edit vlans]
user@switch# set pvlan100 interface xe-0/0/2.0 isolated
user@switch# set pvlan400 interface xe-0/0/5.0 isolated
```

### Results

Check the results of the configuration on Switch 2:

```
[edit]
user@switch# show
interfaces {
  xe-0/0/0 {
    unit 0 {
      family ethernet-switching {
        port-mode access;
        vlan {
          members pvlan100;
        }
      }
    }
  }
  xe-0/0/1 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members pvlan100;
        }
      }
    }
  }
}
```



```

        members pvlan400;
    }
}
}
xe-0/0/2 {
    unit 0 {
        family ethernet-switching {
            port-mode trunk;
        }
    }
}
xe-0/0/3 {
    unit 0 {
        family ethernet-switching {
            port-mode access;
        }
    }
}
xe-0/0/5 {
    unit 0 {
        family ethernet-switching {
            port-mode access;
        }
    }
}
xe-0/0/6 {
    unit 0 {
        family ethernet-switching {
            port-mode access;
        }
    }
}
vlands {
    comm300 {
        vlan-id 300;
        interface {
            xe-0/0/3.0;
        }
        primary-vlan pvlan100;
    }
    comm600 {
        vlan-id 600;
        interface {
            xe-0/0/6.0;
        }
        primary-vlan pvlan400;
    }
    pvlan100 {
        vlan-id 100;
        interface {
            xe-0/0/0.0;
            xe-0/0/2.0;
            xe-0/0/3.0;
            xe-0/0/1.0 {
                pvlan-trunk;
            }
        }
    }
}

```



```

    }
  }
  no-local-switching;
  isolation-id 200;
}
pvlan400 {
  vlan-id 400;
  interface {
    xe-0/0/5.0;
    xe-0/0/6.0;
    xe-0/0/1.0 {
      pvlan-trunk;
    }
  }
  no-local-switching;
  isolation-id 500;
}
}

```

## Verification

To confirm that the configuration is working properly, perform these tasks:

- [Verifying That the Private VLAN and Secondary VLANs Were Created on page 1540](#)
- [Verifying The Ethernet Switching Table Entries on page 1540](#)

### *Verifying That the Private VLAN and Secondary VLANs Were Created*

**Purpose** Verify that the primary VLAN and secondary VLANs were properly created on Switch 1.

**Action** Use the `show vlans` command:

```
user@switch> show vlans private-vlan
```

Name	Role	Tag	Interfaces
pvlan100	Primary	100	xe-0/0/0.0, xe-0/0/1.0, xe-0/0/2.0,
xe-0/0/3.0			
__iso_pvlan100__	Isolated	200	xe-0/0/2.0
comm300	Community	300	xe-0/0/3.0
pvlan400	Primary	400	xe-0/0/0.0, xe-0/0/1.0, xe-0/0/5.0,
xe-0/0/6.0			
__iso_pvlan400__	Isolated	500	xe-0/0/5.0
comm600	Community	600	xe-0/0/6.0

**Meaning** The output shows that the private VLANs were created and identifies the interfaces and secondary VLANs associated with them.

### *Verifying The Ethernet Switching Table Entries*

**Purpose** Verify that the Ethernet switching table entries were created for primary VLAN pvlan100.

**Action** Show the Ethernet switching table entries for pvlan100.

```
user@switch> show ethernet-switching table vlan pvlan100 private-vlan
```



```

Ethernet-switching table: 0 unicast entries
pvlan100          *          Flood          - All-members
pvlan100          00:10:94:00:00:02 Learn      xe-0/0/2.0
__iso_pvlan100__  *          Flood          - All-members
__iso_pvlan100__  00:10:94:00:00:02 Replicated - xe-0/0/2.0

```

- Related Documentation**
- [Understanding Secondary VLAN Trunk Ports and Promiscuous Access Ports on PVLANS on page 1399](#)
  - [Understanding Private VLANs on page 1389](#)
  - [Understanding PVLAN Traffic Flows Across Multiple Switches on page 1395](#)
  - [Creating a Private VLAN on a Single Switch on page 1560](#)
  - [Understanding Egress Firewall Filters with PVLANS on page 1408](#)
  - [Troubleshooting Private VLANs on page 1763](#)

## Q-in-Q Tunneling Configuration Example

- [Example: Setting Up Q-in-Q Tunneling on page 1541](#)

### Example: Setting Up Q-in-Q Tunneling

Service providers can use Q-in-Q tunneling to transparently pass Layer 2 VLAN traffic between customer sites without removing or changing the customer VLAN tags or class-of-service (CoS) settings. Data centers can use Q-in-Q tunneling to isolate customer traffic within a single site or when customer traffic flows between cloud data centers in different geographic locations.

This example describes how to set up Q-in-Q tunneling:

- [Requirements on page 1541](#)
- [Overview and Topology on page 1541](#)
- [Configuration on page 1542](#)
- [Verification on page 1543](#)

#### Requirements

This example requires one QFX Series device with Junos OS Release 12.1 or later.

Before you begin setting up Q-in-Q tunneling, make sure you have created and configured the necessary customer VLANs on the neighboring switches. See [“Configuring VLANs” on page 1553](#).

#### Overview and Topology

In this service provider network, there are multiple customer VLANs mapped to one service VLAN.

[Table 124 on page 1542](#) lists the settings for the sample topology.



Table 124: Components of the Topology for Setting Up Q-in-Q Tunneling

Interface	Description
xe-0/0/11.0	Tagged S-VLAN trunk port
xe-0/0/12.0	Untagged customer-facing access port
xe-0/0/13.0	Untagged customer-facing access port
xe-0/0/14.0	Tagged S-VLAN trunk port

### Configuration

#### CLI Quick Configuration

To quickly create and configure Q-in-Q tunneling, copy the following commands and paste them into the switch terminal window:

```
[edit]
set vlans service-vlan vlan-id 1000
set vlans service-vlan dot1q-tunneling customer-vlans 1-100
set vlans service-vlan dot1q-tunneling customer-vlans 201-300
set interfaces xe-0/0/11 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/11 unit 0 family ethernet-switching vlan members 1000
set interfaces xe-0/0/12 unit 0 family ethernet-switching port-mode access
set interfaces xe-0/0/12 unit 0 family ethernet-switching vlan members 1000
set interfaces xe-0/0/13 unit 0 family ethernet-switching port-mode access
set interfaces xe-0/0/13 unit 0 family ethernet-switching vlan members 1000
set interfaces xe-0/0/14 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/14 unit 0 family ethernet-switching vlan members 1000
set ethernet-switching-options dot1q-tunneling ether-type 0x9100
```

#### Step-by-Step Procedure

To configure Q-in-Q tunneling:

1. Set the VLAN ID for the S-VLAN:

```
[edit vlans]
user@switch# set service-vlan vlan-id (Layer 3 Subinterfaces) 1000
```

2. Enable Q-in-Q tunneling and specify the customer VLAN ranges:

```
[edit vlans]
user@switch# set service-vlan dot1q-tunneling customer-vlans 1-100
user@switch# set service-vlan dot1q-tunneling customer-vlans 201-300
```

3. Set the port mode and VLAN information for the interfaces:

```
[edit interfaces]
user@switch# set xe-0/0/11 unit 0 family ethernet-switching port-mode trunk
user@switch# set xe-0/0/11 unit 0 family ethernet-switching vlan members 1000
user@switch# set xe-0/0/12 unit 0 family ethernet-switching port-mode access
user@switch# set xe-0/0/12 unit 0 family ethernet-switching vlan members 1000
user@switch# set xe-0/0/13 unit 0 family ethernet-switching port-mode access
user@switch# set xe-0/0/13 unit 0 family ethernet-switching vlan members 1000
user@switch# set xe-0/0/14 unit 0 family ethernet-switching port-mode trunk
user@switch# set xe-0/0/14 unit 0 family ethernet-switching vlan members 1000
```

4. Set the Q-in-Q Ethertype value (optional):

```
[edit]
user@switch# set ethernet-switching-options dot1q-tunneling ether-type 0x9100
```



## Results

Check the results of the configuration:

```

user@switch> show configuration vlans service-vlan
vlan-id 1000 {
  dot1q-tunneling {
    customer-vlans [ 1-100 201-300 ];
  }
}
user@switch> show configuration interfaces
xe-0/0/11 {
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan members 1000;
    }
  }
}
xe-0/0/12 {
  unit 0 {
    family ethernet-switching {
      port-mode access;
      vlan members 1000;
    }
  }
}
xe-0/0/13 {
  unit 0 {
    family ethernet-switching {
      port-mode access;
      vlan members 1000;
    }
  }
}
xe-0/0/14 {
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan members 1000;
    }
  }
}
user@switch> show ethernet-switching-options
dot1q-tunneling {
  ether-type 0x9100;
}

```

## Verification

Confirm that the configuration is working properly.

### *Verifying That Q-in-Q Tunneling Was Enabled*

**Purpose** Verify that Q-in-Q tunneling was properly enabled.



**Action** Use the **show vlans** command:

```
user@switch> show vlans service-vlan extensive
VLAN: service-vlan, Created at: Wed Mar 14 07:17:53 2012
802.1Q Tag: 1000, Internal index: 18, Admin State: Enabled, Origin: Static
Dot1q Tunneling Status: Enabled
Customer VLAN ranges:
    1-100
    201-300
Protocol: Port Mode
Number of interfaces: Tagged 2 (Active = 0), Untagged 2 (Active = 0)
    xe-0/0/11.0, tagged, trunk
    xe-0/0/14.0, tagged, trunk
    xe-0/0/12.0, untagged, access
    xe-0/0/13.0, untagged, access
```

**Meaning** The output indicates that Q-in-Q tunneling is enabled and that the VLAN is tagged and shows the associated customer VLANs.

**Related Documentation**

- [Understanding Q-in-Q Tunneling and VLAN Translation on page 1416](#)
- [Configuring Q-in-Q Tunneling on page 1562](#)
- [Troubleshooting Q-in-Q and VLAN Translation Configuration on page 1765](#)

---

## Configuration Tasks

- [Configuring the Interface Address on page 1545](#)
- [Configuring MAC Notification on page 1547](#)
- [Configuring MAC Table Aging on page 1549](#)
- [Configuring Reflective Relay on page 1549](#)
- [Configuring Static ARP Entries on page 1550](#)
- [Configuring Reflective Relay on page 1550](#)
- [Configuring Routed VLAN Interfaces on page 1551](#)
- [Configuring the Native VLAN Identifier on page 1552](#)
- [Configuring VLANs on page 1553](#)
- [Creating a Series of Tagged VLANs on page 1555](#)
- [Configuring STP on page 1556](#)
- [Unblocking an Interface That Receives BPDUs in Error on page 1557](#)
- [Configuring VLAN Spanning Tree Protocol on page 1557](#)
- [Disabling MAC Learning on page 1558](#)
- [Disabling MAC Learning in a VLAN on page 1559](#)
- [Creating a Private VLAN on a Single Switch on page 1560](#)
- [Creating a Private VLAN Spanning Multiple Switches on page 1561](#)
- [Configuring Q-in-Q Tunneling on page 1562](#)



- [Configuring Layer 2 Protocol Tunneling on page 1563](#)
- [Configuring the Forwarding Mode on page 1565](#)

## Configuring the Interface Address

You assign an address to an interface by specifying the address when configuring the protocol family. For the **inet** or **inet6** family, configure the interface IP address. For the **iso** family, configure one or more addresses for the loopback interface. For the **ccc**, **ethernet-switching**, **tcc**, **mpls**, **tnp**, and **vpls** families, you never configure an address.



**NOTE:** The point-to-point (PPP) address is taken from the loopback interface address that has the primary attribute. When the loopback interface is configured as an unnumbered interface, it takes the primary address from the donor interface.

To assign an address to an interface, include the **address** statement:

```
address address {
  broadcast address;
  destination address;
  destination-profile name;
  eui-64;
  preferred;
  primary;
}
```

You can include these statements at the following hierarchy levels:

- **[edit interfaces *interface-name* unit *logical-unit-number* family *family*]**
- **[edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number* family *family*]**

In the **address** statement, specify the network address of the interface.

For each address, you can optionally configure one or more of the following:

- Broadcast address for the interface subnet—Specify this in the **broadcast** statement; this applies only to Ethernet interfaces, such as the management interface **fxp0**, **em0**, or **me0** the Fast Ethernet interface, and the Gigabit Ethernet interface.
- Address of the remote side of the connection (for point-to-point interfaces only)—Specify this in the **destination** statement.
- PPP properties to the remote end—Specify this in the **destination-profile** statement. You define the profile at the **[edit access group-profile *name* ppp]** hierarchy level (for point-to-point interfaces only).
- Whether the router or switch automatically generates the host number portion of interface addresses—The **eui-64** statement applies only to interfaces that carry IPv6 traffic, in which the prefix length of the address is 64 bits or less, and the low-order 64 bits of the address are zero. This option does not apply to the loopback interface (**lo0**)



because IPv6 addresses configured on the loopback interface must have a 128-bit prefix length.

- Whether this address is the preferred address—Each subnet on an interface has a preferred local address. If you configure more than one address on the same subnet, the preferred local address is chosen by default as the source address when you originate packets to destinations on the subnet.

By default, the preferred address is the lowest-numbered address on the subnet. To override the default and explicitly configure the preferred address, include the **preferred** statement when configuring the address.

- Whether this address is the primary address—Each interface has a primary local address. If an interface has more than one address, the primary local address is used by default as the source address when you send packets from an interface where the destination provides no information about the subnet (for example, some **ping** commands).

By default, the primary address on an interface is the lowest-numbered non-127 (in other words, non-loopback) preferred address on the interface. To override the default and explicitly configure the preferred address, include the **primary** statement when configuring the address.

- [Configuring Interface IPv4 Addresses on page 1546](#)
- [Configuring Interface IPv6 Addresses on page 1546](#)

---

### Configuring Interface IPv4 Addresses

---

You can configure router or switch interfaces with a 32-bit IP version 4 (IPv4) address and optionally with a destination prefix, sometimes called a *subnet mask*. An IPv4 address utilizes a 4-octet dotted decimal address syntax (for example, **192.16.1.1**). An IPv4 address with destination prefix utilizes a 4-octet dotted decimal address syntax with a destination prefix appended (for example, **192.16.1.1/30**).

To configure an IPv4 address on routers and switches running Junos OS, use the **edit interface *interface-name* unit *number* family inet address *a.b.c.d/nn*** statement at the **[edit interfaces]** hierarchy level.



**NOTE:** Juniper Networks routers and switches support /31 destination prefixes when used in point-to-point Ethernet configurations; however, they are not supported by many other devices, such as hosts, hubs, routers, or switches. You must determine if the peer system also supports /31 destination prefixes before configuration.

---

### Configuring Interface IPv6 Addresses

---



**NOTE:** IPv6 is not currently supported for the QFX Series.



You represent IP version 6 (IPv6) addresses in hexadecimal notation using a colon-separated list of 16-bit values.

You assign a 128-bit IPv6 address to an interface by including the **address** statement:

```
address aaaa:bbbb:...:zzzz/nn;
```



**NOTE:** You cannot configure a subnet zero IPv6 address because RFC 2461 reserves the subnet-zero address for anycast addresses, and Junos OS complies with the RFC.

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number* family inet6]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number* family inet6]

The double colon (::) represents all bits set to 0, as shown in the following example:

```
interfaces fe-0/0/1 {
  unit 0 {
    family inet6 {
      address fec0:1:1::2/64;
    }
  }
}
```



**NOTE:** You must manually configure the router or switch advertisement and advertise the default prefix for autoconfiguration to work on a specific interface.

#### Related Documentation

- Configuring IPCP Options
- Configuring Default, Primary, and Preferred Addresses and Interfaces

## Configuring MAC Notification

When a MAC address is learned or unlearned, SNMP notifications can be sent to the network management system at regular intervals to record the addition or removal of the MAC address. This process is known as *MAC notification*.

The MAC notification interval defines how often Simple Network Management Protocol (SNMP) notifications logging the addition or removal of MAC addresses on the switch are sent to the network management system.

MAC notification is disabled by default. When MAC notification is enabled, the default MAC notification interval is 30 seconds.



To enable or disable MAC notification, or to set the MAC notification interval, perform these tasks:

- [Enabling MAC Notification on page 1548](#)
- [Disabling MAC Notification on page 1548](#)
- [Setting the MAC Notification Interval on page 1548](#)

---

### Enabling MAC Notification

MAC notification is disabled by default. You need to perform this procedure to enable MAC notification.

To enable MAC notification on the switch with the default MAC notification interval of 30 seconds:

```
[edit ethernet-switching-options]
user@switch# set mac-notification
```

To enable MAC notification on the switch with any other MAC notification interval (here, 60 seconds):

```
[edit ethernet-switching-options]
user@switch# set mac-notification notification-interval 60
```

---

### Disabling MAC Notification

MAC notification is disabled by default. Perform this procedure only if MAC notification was previously enabled on your switch.

To disable MAC notification on the switch:

```
[edit ethernet-switching-options]
user@switch# delete mac-notification
```

---

### Setting the MAC Notification Interval

The default MAC notification interval is 30 seconds. The procedure to change the MAC notification interval to a different interval is identical to the procedure to enable MAC notification on the switch with a nondefault value for the MAC notification interval.

To set the MAC notification interval on the switch (here, the MAC notification interval is set to 5 seconds):

```
[edit ethernet-switching-options]
user@switch# set mac-notification notification-interval 5
```

#### Related Documentation

- [Verifying That MAC Notification Is Working Properly on page 1675](#)



## Configuring MAC Table Aging

MAC table aging ensures that a switch tracks only active nodes on the network and that it is able to flush out network nodes that are no longer available.

To manage MAC entries more efficiently, you can configure an entry's aging time, which is the maximum time that an entry can remain in the MAC address table before it is deleted because it has reached its maximum age.

You can use the **set-mac-table-aging-time** command to configure how long entries remain in the Ethernet switching table before expiring. Here the VLAN is **employee-vlan**:

```
[edit vlans employee-vlan]
user@switch# set mac-table-aging-time 200
```

### Related Documentation

- [Understanding Bridging on page 1381](#)
- [Example: Setting Up Bridging with Multiple VLANs on page 1476](#)
- [Example: Connecting an Access Switch to a Distribution Switch on page 1487](#)

## Configuring Reflective Relay

Configure reflective relay when a switch port must return packets on a downstream port. For example, configure reflective relay when a switch port receives aggregated virtual machine packets from a technology such as virtual Ethernet port aggregator (VEPA). When these packets are passed through the switch, reflective relay allows the switch to send those packets back on the same interface that was used for delivery.

Before you begin configuring reflective relay, ensure that you have:

- Configured packet aggregation on the server connected to the port. See your server documentation.
- Configured the port for all VLANs that could be included in aggregated packets..

To configure reflective relay:

1. Configure an Ethernet interface with a port mode of **tagged-access**:

```
[edit]
user@switch# set interfaces interface-name unit number family family-type port-mode
tagged-access
```

For example:

```
[edit]
user@switch# set interfaces xe-0/0/2 unit 0 family ethernet-switching port-mode
tagged-access
```

2. Configure the interface for reflective relay:

```
[edit]
user@switch# set interfaces interface-name unit number family family-type reflective-relay
```

For example:

```
[edit]
user@switch# set interfaces xe-0/0/2 unit 0 family ethernet-switching reflective-relay
```



3. Configure the interface for the VLANs that exist on the VM server:

```
[edit]
user@switch# set interfaces interface-name unit number family family-type vlan members
vlan-names
```

For example:

```
[edit]
user@switch# set interfaces xe-0/0/2 unit 0 family ethernet-switching vlan members
[VLAN_Purple VLAN_Orange VLAN_Blue]
```

- Related Documentation**
- [Example: Configuring Reflective Relay for Use with VEPA Technology on page 1462](#)
  - [Understanding Reflective Relay for Use with VEPA Technology on page 1388](#)

## Configuring Static ARP Entries

You can create static ARP table entries, which are explicit mappings between IP addresses and MAC addresses.

- To configure a static ARP entry:

```
[edit interfaces interface-name unit logical-unit-number family inet address
address]
user@switch# set arp ip-address (mac | multicast-mac) mac-address
```

The IP address that you specify must be part of the subnet defined in the enclosing **address** statement.

To associate a multicast MAC address with a unicast IP address, use the **multicast-mac** statement.

Specify the MAC address as 6 hexadecimal bytes in one of the following formats: *nnnn.nnnn.nnnn* or *nn:nn:nn:nn:nn:nn*; for example, 0011.2233.4455 or 00:11:22:33:44:55.

- Related Documentation**
- [Understanding Static ARP Entries on page 4124](#)
  - [arp on page 1580](#)

## Configuring Reflective Relay

Configure reflective relay when a switch port must return packets on a downstream port. For example, configure reflective relay when a switch port receives aggregated virtual machine packets from a technology such as virtual Ethernet port aggregator (VEPA). When these packets are passed through the switch, reflective relay allows the switch to send those packets back on the same interface that was used for delivery.

Before you begin configuring reflective relay, ensure that you have:

- Configured packet aggregation on the server connected to the port. See your server documentation.
- Configured the port for all VLANs that could be included in aggregated packets..



To configure reflective relay:

1. Configure an Ethernet interface with a port mode of **tagged-access**:

```
[edit]
user@switch# set interfaces interface-name unit number family family-type port-mode
tagged-access
```

For example:

```
[edit]
user@switch# set interfaces xe-0/0/2 unit 0 family ethernet-switching port-mode
tagged-access
```

2. Configure the interface for reflective relay:

```
[edit]
user@switch# set interfaces interface-name unit number family family-type reflective-relay
```

For example:

```
[edit]
user@switch# set interfaces xe-0/0/2 unit 0 family ethernet-switching reflective-relay
```

3. Configure the interface for the VLANs that exist on the VM server:

```
[edit]
user@switch# set interfaces interface-name unit number family family-type vlan members
vlan-names
```

For example:

```
[edit]
user@switch# set interfaces xe-0/0/2 unit 0 family ethernet-switching vlan members
[VLAN_Purple VLAN_Orange VLAN_Blue]
```

#### Related Documentation

- [Example: Configuring Reflective Relay for Use with VEPA Technology on page 1462](#)
- [Understanding Reflective Relay for Use with VEPA Technology on page 1388](#)

## Configuring Routed VLAN Interfaces

Routed VLAN interfaces (RVIs) enable a switch to recognize which packets are being sent to local addresses so that they are bridged whenever possible and are routed only when needed. Whenever packets can be switched instead of routed, several layers of processing are eliminated. Switching also reduces the number of address look-ups.

To configure the routed VLAN interface:

1. Create the VLAN by assigning it a name and a VLAN ID:

```
[edit]
user@switch# set vlans support vlan-id 111
```

2. Assign an interface to the VLAN by specifying the logical interface (with the **unit** statement) and specifying the VLAN name as the member:

```
[edit]
user@switch# set interfaces ge-0/0/18 unit 0 family ethernet-switching vlan members
support
```

3. Create the subnet for the VLAN's broadcast domain:

```
[edit]
```



```
user@switch# set interfaces vlan unit 111 family inet address 111.111.111.1/24
```

4. Bind a Layer 3 interface with the VLAN:

```
[edit]
```

```
user@switch# set vlans support l3-interface vlan.111
```



**NOTE:** Layer 3 interfaces on trunk ports allow the interface to transfer traffic between multiple VLANs. Within a VLAN, traffic is bridged, while across VLANs, traffic is routed.

You can display the configuration settings:

```
user@switch> show interfaces vlan terse
```

Interface	Admin	Link	Proto	Local	Remote
vlan	up	up			
vlan.111	up	up	inet	111.111.111.1/24	

```
user@switch> show vlans
```

Name	Tag	Interfaces
default		None
employee-vlan	20	ge-1/0/0.0, ge-1/0/1.0, ge-1/0/2.0
marketing	40	ge-1/0/10.0, ge-1/0/20.0, ge-1/0/30.0
support	111	ge-0/0/18.0
mgmt		bme0.32769, bme0.32771*

```
user@switch> show ethernet-switching table
```

```
Ethernet-switching table: 1 entries, 0 learned
```

VLAN	MAC address	Type	Age	Interfaces
support	00:19:e2:50:95:a0	Static		- Router

## Related Documentation

### Configuring the Native VLAN Identifier

Switches support receiving and forwarding routed or bridged Ethernet frames with 802.1Q VLAN tags. The logical interface on which untagged packets are received must have the same native VLAN ID as that on the physical interface.

To configure the native VLAN ID using the CLI:

1. Configure the port mode as **trunk** so that the interface is on multiple VLANs and can multiplex traffic between different VLANs. Trunk interfaces typically connect to other switches and to routers on the LAN.

```
[edit interfaces xe-0/0/3 unit 0 family ethernet-switching]
```

```
user@switch# set port-mode trunk
```

2. Configure the native VLAN ID:

```
[edit interfaces xe-0/0/3 unit 0 family ethernet-switching]
```

```
user@switch# set native-vlan-id 3
```



## Related Documentation

- [Understanding Bridging on page 1381](#)
- [Example: Setting Up Bridging with Multiple VLANs on page 1476](#)
- [Example: Setting Up Basic Bridging and a VLAN on the QFX Series on page 1467](#)

## Configuring VLANs

Switches use VLANs to make logical groupings of network nodes with their own broadcast domains. You can use VLANs to limit the traffic flowing across the entire LAN and reduce collisions and packet retransmissions.

For each endpoint on the VLAN, configure the following VLAN parameters on the corresponding interface:

1. Specify the description of the VLAN:

```
[edit interfaces xe-chassis/pic/port unit 0]
user@switch# set description vlan-description
```

2. Specify the unique name of the VLAN:



**NOTE:** In a QFabric system, do not configure “default” as the name of a VLAN. Though the QFabric system will allow you to configure and commit a VLAN with the name “default” in the current software with no commit errors, it will not work. Junos OS 12.2 and onwards will not allow you to commit a VLAN with the name “default.”

```
[edit interfaces xe-chassis/pic/port unit 0]
user@switch# set family ethernet-switching vlan members vlan-name
```

3. Create the subnet for the VLAN:

```
[edit interfaces]
user@switch# set vlan unit 0 family inet address ip-address
```

4. Configure the VLAN tag ID or VLAN ID range for the VLAN:

```
[edit vlans]
user@switch# set vlan-name vlan-id vlan-id-number

or
```

```
[edit vlans]
user@switch# set vlan-name vlan-range vlan-id-low-vlan-id-high
```

5. Specify the maximum time that an entry can remain in the forwarding table before it ages out:

```
[edit vlans]
user@switch# set vlan-name mac-table-aging-time time
```

6. Specify a VLAN firewall filter to be applied to incoming or outgoing packets:

```
[edit vlans]
user@switch# set vlan-name filter (input | output) filter-name
```

## Related Documentation

- [Example: Setting Up Basic Bridging and a VLAN on the QFX Series on page 1467](#)
- [Configuring Routed VLAN Interfaces on page 1551](#)
- [Creating a Series of Tagged VLANs on page 1555](#)



- [Understanding Bridging on page 1381](#)



## Creating a Series of Tagged VLANs

When you divide an Ethernet LAN into multiple VLANs, each VLAN is assigned a unique IEEE 802.1Q tag. This tag is associated with each frame in the VLAN, and the network nodes receiving the traffic can use the tag to identify which VLAN a frame is associated with.

Instead of configuring VLANs and 802.1Q tags one at a time for a trunk interface, you can configure a VLAN range to create a series of tagged VLANs.

When an Ethernet LAN is divided into VLANs, each VLAN is identified by a unique 802.1Q tag. The tag is applied to all frames so that the network nodes receiving the frames can detect which VLAN the frames belong to. Trunk ports, which multiplex traffic among a number of VLANs, use the tag to determine the origin of frames and where to forward them.

For example, you could configure the VLAN **employee** and specify a tag range of **10 through 12**. This creates the following VLANs and tags:

- VLAN **employee-10**, tag 10
- VLAN **employee-11**, tag 11
- VLAN **employee-12**, tag 12

Creating tagged VLANs in a series has the following limitations:

- Layer 3 interfaces do not support this feature.
- Because an access interface can only support one VLAN member, access interfaces also do not support this feature.

To configure a series of tagged VLANs using the CLI (here, the VLAN is **employee**):

1. Configure the series (here, a VLAN series from 120 through 130):

```
[edit]
user@switch# set vlans employee vlan-range 120-130
```

2. Associate a series of tagged VLANs when you configure an interface in one of two ways:

- Include the name of the series:

```
[edit interfaces]
user@switch# set interfaces xe-0/0/22.0 family ethernet-switching vlanmembers employee
```

- Include the VLAN range:

```
[edit interfaces]
user@switch# set interfaces xe-0/0/22.0 family ethernet-switching vlan members 120-130
```

Associating a series of tagged VLANs to an interface by name or by VLAN range has the same result: VLANs **\_\_employee\_120\_\_** through **\_\_employee\_130\_\_** are created.





**NOTE:** When a series of VLANs is created using the `vlan-range` command, the VLAN names are preceded and followed by a double underscore.

**Related  
Documentation**

- [Verifying That a Series of Tagged VLANs Has Been Created on page 1675](#)
- [Example: Setting Up Basic Bridging and a VLAN on the QFX Series on page 1467](#)
- [Example: Setting Up Bridging with Multiple VLANs on page 1476](#)
- [Understanding Bridging on page 1381](#)

## Configuring STP

The default spanning-tree protocol on the QFX Series is Rapid Spanning Tree Protocol (RSTP). RSTP provides faster convergence times than Spanning Tree Protocol (STP) does. However, some legacy networks require the slower convergence times of basic STP.

If your network includes 802.1D 1998 bridges, you can remove RSTP and explicitly configure STP. When you explicitly configure STP, the QFX Series products use the IEEE 802.1D 2004 specification, force version 0. This configuration runs a version of RSTP that is compatible with the classic, basic STP.

To configure STP using the CLI:

1. Delete the RSTP configuration on the interface (here, the interface is **xe-0/0/5**):

```
[edit]
user@switch# delete protocols rstp interface xe-0/0/5
```

2. Configure STP on the interface:

```
[edit]
user@switch# set protocols stp interface xe-0/0/5
```

3. Commit the configuration:

```
[edit]
user@switch# commit
```

**Related  
Documentation**

- [show spanning-tree bridge on page 1736](#)
- [show spanning-tree interface on page 1741](#)
- [Overview of Spanning-Tree Protocols on page 1409](#)



## Unblocking an Interface That Receives BPDUs in Error



**NOTE:** BPDU block protection is disabled on Node devices.

QFX Series switches use bridge protocol data unit (BPDU) protection on interfaces to prevent them from receiving BPDUs that could trigger a spanning-tree misconfiguration. If BPDUs are received on a BPDU-protected interface, the interface transitions to a blocking state and stops forwarding frames.

After you fix the misconfiguration that triggered the sending of BPDUs to an interface, you can unblock the interface and return it to service.

To unblock an interface after fixing the misconfiguration that triggered the BPDUs and return it to service using the CLI:

- Automatically unblock an interface by configuring a timer that expires (here, the interface is **xe-0/0/6**):

```
[edit ethernet-switching-options]
user@switch# set bpdublockdisable-timeout 30 interface xe-0/0/6
```

- Manually unblock an interface using the operational mode command:

```
user@switch> clear ethernet-switching bpdublock interface xe-0/0/6
```

### Related Documentation

- [Example: Configuring BPDU Protection on STP Interfaces to Prevent STP Miscalculations on page 1495](#)
- [Understanding BPDU Protection for STP, RSTP, and MSTP on page 1413](#)

## Configuring VLAN Spanning Tree Protocol

VLAN Spanning Tree Protocol (VSTP) enables the QFX Series to run one or more Spanning Tree Protocol (STP) or Rapid Spanning Tree Protocol (RSTP) instances for each VLAN on which VSTP is enabled. For networks with multiple VLANs, VSTP improves intelligent tree spanning by defining the best paths within the VLANs instead of within the entire network.

To configure VSTP:

- (Optional) Enable Rapid Spanning Tree Protocol (RSTP):

```
[edit protocols]
user@switch# set rstp
```

VSTP can run on a maximum of 253 VLANs; RSTP runs on the remaining VLANs if configured. Enabling RSTP ensures that a spanning-tree protocol runs on all VLANs.

- Enable VSTP.

- To enable VSTP on multiple VLANs using a VLAN group:

```
[edit protocols]
user@switch# set vstp vlan-group group group-name vlan vlan-id-range
```



- To enable VSTP on all VLANs:

```
[edit protocols]
user@switch# set vstp vlan all
```



**NOTE:** You must enable RSTP if you used the `set vstp vlan all` statement to enable VSTP and if the switch has more than 253 VLANs. If you use the `set vstp vlan all` statement to enable VSTP on a switch with more than 253 VLANs, the configuration cannot be committed.

- To enable VSTP on a VLAN using a single VLAN ID:

```
[edit protocols]
user@switch# set vstp vlan vlan-id
```

- To enable VSTP on a VLAN using a single VLAN name:

```
[edit protocols]
user@switch# set vstp vlan vlan-name
```

#### Related Documentation

- [Understanding VSTP on page 1412](#)

## Disabling MAC Learning

By default, MAC learning is globally enabled on all nodes in a QFX Series product. This topic describes how to disable MAC learning, as well as how to reenable and verify that MAC learning has been enabled or disabled.

Disabling dynamic MAC learning on the QFX Series prevents a node from learning source and destination MAC addresses.

- To disable MAC learning on the QFX Series:

```
[edit ethernet-switching-options interfaces interface]
user@switch# set no-mac-learning
```

- To enable MAC learning on the QFX Series:

```
[edit ethernet-switching-options interfaces interface]
user@switch# delete no-mac-learning
user@switch# deactivate no-mac-learning
```

- To verify the status of MAC learning on the QFX Series, view the Ethernet MAC learning statistics in operational mode.

```
user@switch> show ethernet-switching statistics mac-learning
Ethernet-switching table: 2 entries, 1 learned
  VLAN      MAC address      Type      Age  Interfaces
  default   *                Flood     -    All-members
  default   00:1f:12:39:90:80 Learn     29   xe-/0/0.0
```

#### Related Documentation

- [Understanding MAC Learning on page 1388](#)
- [Example: Disabling MAC Learning on page 1508](#)
- [no-mac-learning \(Global\) on page 1618](#)



## Disabling MAC Learning in a VLAN

By default, MAC learning is enabled on a VLAN. This topic describes how to disable MAC learning in a VLAN, as well as how to reenable and verify that MAC learning has been enabled or disabled.

Disabling dynamic MAC learning in a VLAN on a QFX Series product prevents a node from learning source and destination MAC addresses.

- To disable MAC learning in a VLAN:

```
[edit vlans vlan-name]  
user@switch# set no-mac-learning
```

- To reenable MAC learning in a VLAN, use either of the following two commands:

```
[edit vlans vlan-name]  
user@switch# delete no-mac-learning  
user@switch# deactivate no-mac-learning
```

- To verify the status of MAC learning on the QFX series:

```
user@switch> show ethernet-switching table
```

### Related Documentation

- [Understanding MAC Learning on page 1388](#)
- [Example: Disabling MAC Learning in a VLAN on page 1508](#)
- [no-mac-learning \(Per VLAN\) on page 1618](#)



## Creating a Private VLAN on a Single Switch

For security reasons, it is often useful to restrict the flow of broadcast and unknown unicast traffic and to even limit the communication between known hosts. The private VLAN (PVLAN) feature allows you to split a broadcast domain into multiple isolated broadcast subdomains, essentially putting a secondary VLAN inside a primary VLAN. This topic describes how to configure a PVLAN on a single switch.

Before you begin, configure names for all secondary VLANs that will be part of the primary VLAN. (You do not need to preconfigure the primary VLAN—it is configured as part of this procedure.) You do not need to create VLAN IDs (tags) for the secondary VLANs. It does not impair functioning if you tag the secondary VLANs, but tags are not used when secondary VLANs are configured on a single switch.

Keep these rules in mind when configuring a PVLAN:

- The primary VLAN must be a tagged VLAN.
- If you are going to configure a community VLAN, you must first configure the primary VLAN and the PVLAN trunk port. You must also configure the primary VLAN to be private using the **pvlan** statement.
- If you are going to configure an isolated VLAN, you must first configure the primary VLAN and the PVLAN trunk port.

If you complete your configuration steps in the order shown, you will not violate these PVLAN rules. To configure a private VLAN on a single switch:

1. Set the name and VLAN ID (802.1Q tag) for the primary VLAN:

```
[edit vlans]
user@switch# set primary-vlan-name vlan-id vlan-id-number
```

2. Configure the VLAN to be private:

```
[edit vlans]
user@switch# set primary-vlan-name pvlan
```

3. Configure the trunk interfaces for the primary VLAN:

```
[edit interfaces]
user@switch# set interface-name unit 0 family ethernet-switching port-mode trunk
user@switch# set interface-name unit 0 family ethernet-switching vlan members
primary-vlan-name
```

4. Add the trunk interfaces to the primary VLAN:

```
[edit vlans]
user@switch# set primary-vlan-name interface interface-name
```

5. Configure the access interfaces for the community (secondary) VLANs:

```
[edit interfaces]
user@switch# set interface-name unit 0 family ethernet-switching port-mode access
```

6. Add the access interfaces to the community VLANs:

```
[edit vlans]
user@switch# set community-vlan-name interface interface-name
```

7. For each community VLAN, set the primary VLAN:

```
[edit vlans]
```



```
user@switch# set community-vlan-name primary-vlan primary-vlan-name
```

8. Configure isolated ports:

```
[edit vlans]
user@switch# set primary-vlan-name interface interface-name isolated
```

#### Related Documentation

- [Understanding Private VLANs on page 1389](#)
- [Understanding PVLAN Traffic Flows Across Multiple Switches on page 1395](#)
- [Creating a Private VLAN Spanning Multiple Switches on page 1561](#)
- [Verifying That a Private VLAN Is Working on page 1678](#)

## Creating a Private VLAN Spanning Multiple Switches

For security reasons, it is often useful to restrict the flow of broadcast and unknown unicast traffic and to even limit the communication between known hosts. The private VLAN (PVLAN) feature allows you to split a broadcast domain into multiple isolated broadcast subdomains, essentially putting a secondary VLAN inside a primary VLAN. This topic describes how to configure a PVLAN to span multiple switches.

Before you begin, configure names for all secondary VLANs that will be part of the primary VLAN. (You do not need to preconfigure the primary VLAN—it is configured as part of this procedure.) You do not need to create VLAN IDs (tags) for the secondary VLANs. It does not impair functioning if you tag the secondary VLANs, but tags are not used when secondary VLANs are configured on a single switch.

The following rules apply to creating PVLANS:

- The primary VLAN must be a tagged VLAN.
- If you are going to configure a community VLAN, you must first configure the primary VLAN and the PVLAN trunk port. You must also configure the primary VLAN to be private using the `pvlan` statement.
- If you are going to configure an isolated VLAN, you must first configure the primary VLAN and the PVLAN trunk port.

If you complete your configuration steps in the order shown, you will not violate these PVLAN rules. To configure a private VLAN to span multiple switches:

1. Set the name and VLAN ID (802.1Q tag) for the primary VLAN:

```
[edit vlans]
user@switch# set primary-vlan-name vlan-id vlan-id-number
```

2. Configure the VLAN to be private:

```
[edit vlans]
user@switch# set primary-vlan-name pvlan
```

3. Configure the trunk interfaces for the primary VLAN:

```
[edit interfaces]
user@switch# set interface-name unit 0 family ethernet-switching port-mode trunk
user@switch# set interface-name unit 0 family ethernet-switching vlan members
primary-vlan-name
```

4. Add the trunk interfaces to the primary VLAN:



```
[edit vlans]
```

```
user@switch# set primary-vlan-name interface interface-name
```

5. Configure the access interfaces for the community (secondary) VLANs:

```
[edit interfaces]
```

```
user@switch# set interface-name unit 0 family ethernet-switching port-mode access
```

6. Add the access interfaces to the community VLANs:

```
[edit vlans]
```

```
user@switch# set community-vlan-name interface interface-name
```

7. For each community VLAN, set the primary VLAN:

```
[edit vlans]
```

```
user@switch# set community-vlan-name primary-vlan primary-vlan-name
```

8. Configure an isolated VLAN ID to create an interswitch isolated domain that spans the switches:

```
[edit vlans]
```

```
user@switch# set primary-vlan-name isolation-vlan-id number
```

9. Configure isolated ports:

```
[edit vlans]
```

```
user@switch# set primary-vlan-name interface interface-name isolated
```

#### Related Documentation

- [Understanding Private VLANs on page 1389](#)
- [Understanding PVLAN Traffic Flows Across Multiple Switches on page 1395](#)
- [Creating a Private VLAN on a Single Switch on page 1560](#)
- [Verifying That a Private VLAN Is Working on page 1678](#)

## Configuring Q-in-Q Tunneling

Q-in-Q tunneling and VLAN translation allow service providers to create a Layer 2 Ethernet connection between two customer sites. Providers can segregate different customers' VLAN traffic on a link (for example, if the customers use overlapping VLAN IDs) or bundle different customer VLANs into a single service VLAN. Data centers can use Q-in-Q tunneling to isolate customer traffic within a single site or when customer traffic flows between cloud data centers in different geographic locations.

Before you begin setting up Q-in-Q tunneling, make sure you have created and configured the necessary customer VLANs on the neighboring switches. See [“Configuring VLANs” on page 1553](#).

To configure Q-in-Q tunneling:

1. Create the service VLAN (S-VLAN) and configure an ID for it:

```
[edit vlans]
```

```
user@switch# set s-vlan-name vlan-id s-vlan-ID
```

2. Enable Q-in-Q tunneling on the S-VLAN:

```
[edit vlans]
```

```
user@switch# set s-vlan-name dot1q-tunneling
```

3. Set the allowed customer VLANs (C-VLANs) on the S-VLAN (optional). Here, the C-VLANs are identified by a range:

```
[edit vlans]
```



```
user@switch# set s-vlan-name dot1q-tunneling customer-vlans range
```

4. Configure a global value for the tag protocol identifier (EtherType) of the service VLAN tags (optional):

```
[edit]
```

```
user@switch# set ethernet-switching-options dot1q-tunneling ether-type ether-type-value
```

Depending on your interface configuration, you might need to adjust the MTU value on your trunk or access ports to accommodate the 4 bytes used for the tag added by Q-in-Q tunneling. For example, if you use the default MTU value of 1514 bytes on your access and trunk ports, you need to make one of the following adjustments:

- Reduce the MTU on the access links by at least 4 bytes so that the frames do not exceed the MTU of the trunk link when S-VLAN tags are added.
- Increase the MTU on the trunk link so that the link can handle the larger frame size.

#### Related Documentation

- [Understanding Q-in-Q Tunneling and VLAN Translation on page 1416](#)
- [Example: Setting Up Q-in-Q Tunneling on page 1541](#)
- [Troubleshooting Q-in-Q and VLAN Translation Configuration on page 1765](#)
- [mtu on page 2097](#)

## Configuring Layer 2 Protocol Tunneling

Layer 2 protocol tunneling (L2PT) allows you to send Layer 2 protocol data units (PDUs) across a service provider network and deliver them to switches at a remote location. This feature is useful when you have a network that includes remote sites that are connected across a service provider network and you want to run Layer 2 protocols on switches connected across the service provider network.

Tunneled Layer 2 PDUs do not normally arrive at high rate. If the tunneled Layer 2 PDUs do arrive at high rate, there might be a problem in the network. Typically, you would want to shut down the interface that is receiving a high rate of tunneled Layer 2 PDUs so that the problem can be isolated. You do so using the **shutdown-threshold** statement. However, if you do not want to completely shut down the interface, you can configure the switch to drop tunneled Layer 2 PDUs that exceed a certain threshold using the **drop-threshold** statement.

L2PT processing is done by the CPU, and L2PT traffic to the CPU is rate-limited to a maximum of 1000 pps. If traffic is received at a rate faster than this limit, the rate limit causes the traffic to be dropped before it hits the threshold and the dropped packets are not reported in L2PT statistics. This can also occur if you configure a drop threshold that is less than 1000 pps but traffic is received at a faster rate. For example, if you configure a drop threshold of 900 pps and the VLAN receives traffic at rate of 1100 pps, L2PT statistics will show that 100 packets were dropped. The 100 packets dropped because of the rate limit will not be reported. Similarly, if you do not configure a drop threshold and the VLAN receives traffic at rate of 1100 pps, the 100 packets dropped because of the rate limit are not reported.



There are no default settings for **drop-threshold** and **shutdown-threshold**. If you do not specify these thresholds, then no thresholds are enforced. As a result, the switch tunnels all Layer 2 PDUs regardless of the speed at which they are received, although the number of packets tunneled per second might be limited by other factors.

You can specify a drop threshold value without specifying a shutdown threshold value, and you can specify a shutdown threshold value without specifying a drop threshold value. If you specify both threshold values, then the drop threshold value must be less than or equal to the shutdown threshold value. If the drop threshold value is greater than the shutdown threshold value and you try to commit the configuration, the commit operation fails.



**NOTE:** L2PT and VLAN translation configured with the [mapping](#) statement cannot both be configured on the same switch.



**NOTE:** If the switch receives untagged Layer 2 control PDUs to be tunneled, then you must configure the switch to map untagged (native) packets to an L2PT-enabled VLAN. Otherwise, the untagged Layer 2 control PDU packets are discarded. For more information, see [“Understanding Q-in-Q Tunneling and VLAN Translation” on page 1416](#).

To configure L2PT:

1. Because L2PT operates under the Q-in-Q tunneling configuration, you must enable Q-in-Q tunneling before you can configure L2PT. Enable Q-in-Q tunneling on VLAN **customer-1**:

```
[edit]
user@switch# set vlans customer-1 dot1q-tunneling
```

2. Enable L2PT for the Layer 2 protocol you want to tunnel, on the VLAN:

- To enable L2PT for a specific protocol (here, STP):

```
[edit]
user@switch# set vlans customer-1 dot1q-tunneling layer2-protocol-tunneling stp
```

- To enable L2PT for all supported protocols:

```
[edit]
user@switch# set vlans customer-1 dot1q-tunneling layer2-protocol-tunneling all
```

3. (Optional) Configure the drop threshold:



**NOTE:** If you also configure the shutdown threshold, ensure that you configure the drop threshold value to be less than or equal to the shutdown threshold value. If the drop threshold value is greater than the shutdown threshold value and you try to commit the configuration changes, the commit operation fails.

```
[edit]
```



```
user@switch# set vlans customer-1 dot1q-tunneling layer2-protocol-tunneling stp
drop-threshold 50
```

4. (Optional) Configure the shutdown threshold:



**NOTE:** If you also configure the drop threshold, ensure that you configure the shutdown threshold value to be greater than or equal to the drop threshold value. If the shutdown threshold value is less than the drop threshold value and you try to commit the configuration changes, the commit operation fails.

```
[edit]
user@switch# set vlans customer-1 dot1q-tunneling layer2-protocol-tunneling stp
shutdown-threshold 100
```



**NOTE:** Once an interface is disabled, you must explicitly reenabling it using the `clear ethernet-switching layer2-protocol-tunneling error` command. Otherwise, the interface remains disabled.

#### Related Documentation

- [Understanding Layer 2 Protocol Tunneling on page 1419](#)
- [Understanding Q-in-Q Tunneling and VLAN Translation on page 1416](#)
- [Example: Setting Up Q-in-Q Tunneling on page 1541](#)

## Configuring the Forwarding Mode

By default, QFX Series products forward packets using store-and-forward mode. You can configure all the interfaces on a QFX series switch or QFabric to use cut-through mode instead.

To enable cut-through switching mode, enter the following statement:

```
[edit forwarding-options]
user@switch# set cut-through
```

#### Related Documentation

- [cut-through on page 1590](#)

## Private VLAN Configuration Tasks

- [Creating a Private VLAN on a Single Switch on page 1566](#)
- [Creating a Private VLAN Spanning Multiple Switches on page 1567](#)
- [Configuring Q-in-Q Tunneling on page 1568](#)
- [Configuring Layer 2 Protocol Tunneling on page 1569](#)



## Creating a Private VLAN on a Single Switch

For security reasons, it is often useful to restrict the flow of broadcast and unknown unicast traffic and to even limit the communication between known hosts. The private VLAN (PVLAN) feature allows you to split a broadcast domain into multiple isolated broadcast subdomains, essentially putting a secondary VLAN inside a primary VLAN. This topic describes how to configure a PVLAN on a single switch.

Before you begin, configure names for all secondary VLANs that will be part of the primary VLAN. (You do not need to preconfigure the primary VLAN—it is configured as part of this procedure.) You do not need to create VLAN IDs (tags) for the secondary VLANs. It does not impair functioning if you tag the secondary VLANs, but tags are not used when secondary VLANs are configured on a single switch.

Keep these rules in mind when configuring a PVLAN:

- The primary VLAN must be a tagged VLAN.
- If you are going to configure a community VLAN, you must first configure the primary VLAN and the PVLAN trunk port. You must also configure the primary VLAN to be private using the **pvlan** statement.
- If you are going to configure an isolated VLAN, you must first configure the primary VLAN and the PVLAN trunk port.

If you complete your configuration steps in the order shown, you will not violate these PVLAN rules. To configure a private VLAN on a single switch:

1. Set the name and VLAN ID (802.1Q tag) for the primary VLAN:

```
[edit vlans]
user@switch# set primary-vlan-name vlan-id vlan-id-number
```

2. Configure the VLAN to be private:

```
[edit vlans]
user@switch# set primary-vlan-name pvlan
```

3. Configure the trunk interfaces for the primary VLAN:

```
[edit interfaces]
user@switch# set interface-name unit 0 family ethernet-switching port-mode trunk
user@switch# set interface-name unit 0 family ethernet-switching vlan members
primary-vlan-name
```

4. Add the trunk interfaces to the primary VLAN:

```
[edit vlans]
user@switch# set primary-vlan-name interface interface-name
```

5. Configure the access interfaces for the community (secondary) VLANs:

```
[edit interfaces]
user@switch# set interface-name unit 0 family ethernet-switching port-mode access
```

6. Add the access interfaces to the community VLANs:

```
[edit vlans]
user@switch# set community-vlan-name interface interface-name
```

7. For each community VLAN, set the primary VLAN:

```
[edit vlans]
```



```
user@switch# set community-vlan-name primary-vlan primary-vlan-name
```

8. Configure isolated ports:

```
[edit vlans]
user@switch# set primary-vlan-name interface interface-name isolated
```

#### Related Documentation

- [Understanding Private VLANs on page 1389](#)
- [Understanding PVLAN Traffic Flows Across Multiple Switches on page 1395](#)
- [Creating a Private VLAN Spanning Multiple Switches on page 1561](#)
- [Verifying That a Private VLAN Is Working on page 1678](#)

## Creating a Private VLAN Spanning Multiple Switches

For security reasons, it is often useful to restrict the flow of broadcast and unknown unicast traffic and to even limit the communication between known hosts. The private VLAN (PVLAN) feature allows you to split a broadcast domain into multiple isolated broadcast subdomains, essentially putting a secondary VLAN inside a primary VLAN. This topic describes how to configure a PVLAN to span multiple switches.

Before you begin, configure names for all secondary VLANs that will be part of the primary VLAN. (You do not need to preconfigure the primary VLAN—it is configured as part of this procedure.) You do not need to create VLAN IDs (tags) for the secondary VLANs. It does not impair functioning if you tag the secondary VLANs, but tags are not used when secondary VLANs are configured on a single switch.

The following rules apply to creating PVLANS:

- The primary VLAN must be a tagged VLAN.
- If you are going to configure a community VLAN, you must first configure the primary VLAN and the PVLAN trunk port. You must also configure the primary VLAN to be private using the `pvlan` statement.
- If you are going to configure an isolated VLAN, you must first configure the primary VLAN and the PVLAN trunk port.

If you complete your configuration steps in the order shown, you will not violate these PVLAN rules. To configure a private VLAN to span multiple switches:

1. Set the name and VLAN ID (802.1Q tag) for the primary VLAN:

```
[edit vlans]
user@switch# set primary-vlan-name vlan-id vlan-id-number
```

2. Configure the VLAN to be private:

```
[edit vlans]
user@switch# set primary-vlan-name pvlan
```

3. Configure the trunk interfaces for the primary VLAN:

```
[edit interfaces]
user@switch# set interface-name unit 0 family ethernet-switching port-mode trunk
user@switch# set interface-name unit 0 family ethernet-switching vlan members
primary-vlan-name
```

4. Add the trunk interfaces to the primary VLAN:



```
[edit vlans]
```

```
user@switch# set primary-vlan-name interface interface-name
```

5. Configure the access interfaces for the community (secondary) VLANs:

```
[edit interfaces]
```

```
user@switch# set interface-name unit 0 family ethernet-switching port-mode access
```

6. Add the access interfaces to the community VLANs:

```
[edit vlans]
```

```
user@switch# set community-vlan-name interface interface-name
```

7. For each community VLAN, set the primary VLAN:

```
[edit vlans]
```

```
user@switch# set community-vlan-name primary-vlan primary-vlan-name
```

8. Configure an isolated VLAN ID to create an interswitch isolated domain that spans the switches:

```
[edit vlans]
```

```
user@switch# set primary-vlan-name isolation-vlan-id number
```

9. Configure isolated ports:

```
[edit vlans]
```

```
user@switch# set primary-vlan-name interface interface-name isolated
```

#### Related Documentation

- [Understanding Private VLANs on page 1389](#)
- [Understanding PVLAN Traffic Flows Across Multiple Switches on page 1395](#)
- [Creating a Private VLAN on a Single Switch on page 1560](#)
- [Verifying That a Private VLAN Is Working on page 1678](#)

## Configuring Q-in-Q Tunneling

Q-in-Q tunneling and VLAN translation allow service providers to create a Layer 2 Ethernet connection between two customer sites. Providers can segregate different customers' VLAN traffic on a link (for example, if the customers use overlapping VLAN IDs) or bundle different customer VLANs into a single service VLAN. Data centers can use Q-in-Q tunneling to isolate customer traffic within a single site or when customer traffic flows between cloud data centers in different geographic locations.

Before you begin setting up Q-in-Q tunneling, make sure you have created and configured the necessary customer VLANs on the neighboring switches. See [“Configuring VLANs” on page 1553](#).

To configure Q-in-Q tunneling:

1. Create the service VLAN (S-VLAN) and configure an ID for it:

```
[edit vlans]
```

```
user@switch# set s-vlan-name vlan-id s-vlan-ID
```

2. Enable Q-in-Q tunneling on the S-VLAN:

```
[edit vlans]
```

```
user@switch# set s-vlan-name dot1q-tunneling
```

3. Set the allowed customer VLANs (C-VLANs) on the S-VLAN (optional). Here, the C-VLANs are identified by a range:

```
[edit vlans]
```



```
user@switch# set s-vlan-name dot1q-tunneling customer-vlans range
```

4. Configure a global value for the tag protocol identifier (EtherType) of the service VLAN tags (optional):

```
[edit]
```

```
user@switch# set ethernet-switching-options dot1q-tunneling ether-type ether-type-value
```

Depending on your interface configuration, you might need to adjust the MTU value on your trunk or access ports to accommodate the 4 bytes used for the tag added by Q-in-Q tunneling. For example, if you use the default MTU value of 1514 bytes on your access and trunk ports, you need to make one of the following adjustments:

- Reduce the MTU on the access links by at least 4 bytes so that the frames do not exceed the MTU of the trunk link when S-VLAN tags are added.
- Increase the MTU on the trunk link so that the link can handle the larger frame size.

#### Related Documentation

- [Understanding Q-in-Q Tunneling and VLAN Translation on page 1416](#)
- [Example: Setting Up Q-in-Q Tunneling on page 1541](#)
- [Troubleshooting Q-in-Q and VLAN Translation Configuration on page 1765](#)
- [mtu on page 2097](#)

## Configuring Layer 2 Protocol Tunneling

Layer 2 protocol tunneling (L2PT) allows you to send Layer 2 protocol data units (PDUs) across a service provider network and deliver them to switches at a remote location. This feature is useful when you have a network that includes remote sites that are connected across a service provider network and you want to run Layer 2 protocols on switches connected across the service provider network.

Tunneled Layer 2 PDUs do not normally arrive at high rate. If the tunneled Layer 2 PDUs do arrive at high rate, there might be a problem in the network. Typically, you would want to shut down the interface that is receiving a high rate of tunneled Layer 2 PDUs so that the problem can be isolated. You do so using the **shutdown-threshold** statement. However, if you do not want to completely shut down the interface, you can configure the switch to drop tunneled Layer 2 PDUs that exceed a certain threshold using the **drop-threshold** statement.

L2PT processing is done by the CPU, and L2PT traffic to the CPU is rate-limited to a maximum of 1000 pps. If traffic is received at a rate faster than this limit, the rate limit causes the traffic to be dropped before it hits the threshold and the dropped packets are not reported in L2PT statistics. This can also occur if you configure a drop threshold that is less than 1000 pps but traffic is received at a faster rate. For example, if you configure a drop threshold of 900 pps and the VLAN receives traffic at rate of 1100 pps, L2PT statistics will show that 100 packets were dropped. The 100 packets dropped because of the rate limit will not be reported. Similarly, if you do not configure a drop threshold and the VLAN receives traffic at rate of 1100 pps, the 100 packets dropped because of the rate limit are not reported.



There are no default settings for **drop-threshold** and **shutdown-threshold**. If you do not specify these thresholds, then no thresholds are enforced. As a result, the switch tunnels all Layer 2 PDUs regardless of the speed at which they are received, although the number of packets tunneled per second might be limited by other factors.

You can specify a drop threshold value without specifying a shutdown threshold value, and you can specify a shutdown threshold value without specifying a drop threshold value. If you specify both threshold values, then the drop threshold value must be less than or equal to the shutdown threshold value. If the drop threshold value is greater than the shutdown threshold value and you try to commit the configuration, the commit operation fails.



**NOTE:** L2PT and VLAN translation configured with the **mapping** statement cannot both be configured on the same switch.



**NOTE:** If the switch receives untagged Layer 2 control PDUs to be tunneled, then you must configure the switch to map untagged (native) packets to an L2PT-enabled VLAN. Otherwise, the untagged Layer 2 control PDU packets are discarded. For more information, see [“Understanding Q-in-Q Tunneling and VLAN Translation” on page 1416](#).

To configure L2PT:

1. Because L2PT operates under the Q-in-Q tunneling configuration, you must enable Q-in-Q tunneling before you can configure L2PT. Enable Q-in-Q tunneling on VLAN **customer-1**:

```
[edit]
user@switch# set vlans customer-1 dot1q-tunneling
```

2. Enable L2PT for the Layer 2 protocol you want to tunnel, on the VLAN:

- To enable L2PT for a specific protocol (here, STP):

```
[edit]
user@switch# set vlans customer-1 dot1q-tunneling layer2-protocol-tunneling stp
```

- To enable L2PT for all supported protocols:

```
[edit]
user@switch# set vlans customer-1 dot1q-tunneling layer2-protocol-tunneling all
```

3. (Optional) Configure the drop threshold:



**NOTE:** If you also configure the shutdown threshold, ensure that you configure the drop threshold value to be less than or equal to the shutdown threshold value. If the drop threshold value is greater than the shutdown threshold value and you try to commit the configuration changes, the commit operation fails.

```
[edit]
```



```
user@switch# set vlans customer-1 dot1q-tunneling layer2-protocol-tunneling stp
drop-threshold 50
```

4. (Optional) Configure the shutdown threshold:



**NOTE:** If you also configure the drop threshold, ensure that you configure the shutdown threshold value to be greater than or equal to the drop threshold value. If the shutdown threshold value is less than the drop threshold value and you try to commit the configuration changes, the commit operation fails.

```
[edit]
user@switch# set vlans customer-1 dot1q-tunneling layer2-protocol-tunneling stp
shutdown-threshold 100
```



**NOTE:** Once an interface is disabled, you must explicitly reenable it using the `clear ethernet-switching layer2-protocol-tunneling error` command. Otherwise, the interface remains disabled.

#### Related Documentation

- [Understanding Layer 2 Protocol Tunneling on page 1419](#)
- [Understanding Q-in-Q Tunneling and VLAN Translation on page 1416](#)
- [Example: Setting Up Q-in-Q Tunneling on page 1541](#)

## Q-in-Q Tunneling Configuration Tasks

- [Configuring Q-in-Q Tunneling on page 1571](#)
- [Configuring Layer 2 Protocol Tunneling on page 1572](#)

### Configuring Q-in-Q Tunneling

Q-in-Q tunneling and VLAN translation allow service providers to create a Layer 2 Ethernet connection between two customer sites. Providers can segregate different customers' VLAN traffic on a link (for example, if the customers use overlapping VLAN IDs) or bundle different customer VLANs into a single service VLAN. Data centers can use Q-in-Q tunneling to isolate customer traffic within a single site or when customer traffic flows between cloud data centers in different geographic locations.

Before you begin setting up Q-in-Q tunneling, make sure you have created and configured the necessary customer VLANs on the neighboring switches. See [“Configuring VLANs” on page 1553](#).

To configure Q-in-Q tunneling:

1. Create the service VLAN (S-VLAN) and configure an ID for it:

```
[edit vlans]
user@switch# set s-vlan-name vlan-id s-vlan-ID
```

2. Enable Q-in-Q tunneling on the S-VLAN:



[edit vlans]

user@switch# **set s-vlan-name** dot1q-tunneling

3. Set the allowed customer VLANs (C-VLANs) on the S-VLAN (optional). Here, the C-VLANs are identified by a range:

[edit vlans]

user@switch# **set s-vlan-name** dot1q-tunneling **customer-vlans** range

4. Configure a global value for the tag protocol identifier (EtherType) of the service VLAN tags (optional):

[edit]

user@switch# **set ethernet-switching-options** dot1q-tunneling **ether-type** ether-type-value

Depending on your interface configuration, you might need to adjust the MTU value on your trunk or access ports to accommodate the 4 bytes used for the tag added by Q-in-Q tunneling. For example, if you use the default MTU value of 1514 bytes on your access and trunk ports, you need to make one of the following adjustments:

- Reduce the MTU on the access links by at least 4 bytes so that the frames do not exceed the MTU of the trunk link when S-VLAN tags are added.
- Increase the MTU on the trunk link so that the link can handle the larger frame size.

#### Related Documentation

- [Understanding Q-in-Q Tunneling and VLAN Translation on page 1416](#)
- [Example: Setting Up Q-in-Q Tunneling on page 1541](#)
- [Troubleshooting Q-in-Q and VLAN Translation Configuration on page 1765](#)
- [mtu on page 2097](#)

## Configuring Layer 2 Protocol Tunneling

Layer 2 protocol tunneling (L2PT) allows you to send Layer 2 protocol data units (PDUs) across a service provider network and deliver them to switches at a remote location. This feature is useful when you have a network that includes remote sites that are connected across a service provider network and you want to run Layer 2 protocols on switches connected across the service provider network.

Tunneled Layer 2 PDUs do not normally arrive at high rate. If the tunneled Layer 2 PDUs do arrive at high rate, there might be a problem in the network. Typically, you would want to shut down the interface that is receiving a high rate of tunneled Layer 2 PDUs so that the problem can be isolated. You do so using the **shutdown-threshold** statement. However, if you do not want to completely shut down the interface, you can configure the switch to drop tunneled Layer 2 PDUs that exceed a certain threshold using the **drop-threshold** statement.

L2PT processing is done by the CPU, and L2PT traffic to the CPU is rate-limited to a maximum of 1000 pps. If traffic is received at a rate faster than this limit, the rate limit causes the traffic to be dropped before it hits the threshold and the dropped packets are not reported in L2PT statistics. This can also occur if you configure a drop threshold that is less than 1000 pps but traffic is received at a faster rate. For example, if you configure a drop threshold of 900 pps and the VLAN receives traffic at rate of 1100 pps, L2PT statistics will show that 100 packets were dropped. The 100 packets dropped because



of the rate limit will not be reported. Similarly, if you do not configure a drop threshold and the VLAN receives traffic at rate of 1100 pps, the 100 packets dropped because of the rate limit are not reported.

There are no default settings for **drop-threshold** and **shutdown-threshold**. If you do not specify these thresholds, then no thresholds are enforced. As a result, the switch tunnels all Layer 2 PDUs regardless of the speed at which they are received, although the number of packets tunneled per second might be limited by other factors.

You can specify a drop threshold value without specifying a shutdown threshold value, and you can specify a shutdown threshold value without specifying a drop threshold value. If you specify both threshold values, then the drop threshold value must be less than or equal to the shutdown threshold value. If the drop threshold value is greater than the shutdown threshold value and you try to commit the configuration, the commit operation fails.



**NOTE:** L2PT and VLAN translation configured with the **mapping** statement cannot both be configured on the same switch.



**NOTE:** If the switch receives untagged Layer 2 control PDUs to be tunneled, then you must configure the switch to map untagged (native) packets to an L2PT-enabled VLAN. Otherwise, the untagged Layer 2 control PDU packets are discarded. For more information, see “[Understanding Q-in-Q Tunneling and VLAN Translation](#)” on page 1416.

To configure L2PT:

1. Because L2PT operates under the Q-in-Q tunneling configuration, you must enable Q-in-Q tunneling before you can configure L2PT. Enable Q-in-Q tunneling on VLAN **customer-1**:

[edit]

```
user@switch# set vlans customer-1 dot1q-tunneling
```

2. Enable L2PT for the Layer 2 protocol you want to tunnel, on the VLAN:

- To enable L2PT for a specific protocol (here, STP):

[edit]

```
user@switch# set vlans customer-1 dot1q-tunneling layer2-protocol-tunneling stp
```

- To enable L2PT for all supported protocols:

[edit]

```
user@switch# set vlans customer-1 dot1q-tunneling layer2-protocol-tunneling all
```

3. (Optional) Configure the drop threshold:





**NOTE:** If you also configure the shutdown threshold, ensure that you configure the drop threshold value to be less than or equal to the shutdown threshold value. If the drop threshold value is greater than the shutdown threshold value and you try to commit the configuration changes, the commit operation fails.

[edit]

```
user@switch# set vlans customer-1 dot1q-tunneling layer2-protocol-tunneling stp  
drop-threshold 50
```

4. (Optional) Configure the shutdown threshold:



**NOTE:** If you also configure the drop threshold, ensure that you configure the shutdown threshold value to be greater than or equal to the drop threshold value. If the shutdown threshold value is less than the drop threshold value and you try to commit the configuration changes, the commit operation fails.

[edit]

```
user@switch# set vlans customer-1 dot1q-tunneling layer2-protocol-tunneling stp  
shutdown-threshold 100
```



**NOTE:** Once an interface is disabled, you must explicitly reenable it using the `clear ethernet-switching layer2-protocol-tunneling error` command. Otherwise, the interface remains disabled.

#### Related Documentation

- [Understanding Layer 2 Protocol Tunneling on page 1419](#)
- [Understanding Q-in-Q Tunneling and VLAN Translation on page 1416](#)
- [Example: Setting Up Q-in-Q Tunneling on page 1541](#)

---

## Proxy ARP Configuration Task

- [Configuring Proxy ARP on page 1574](#)

### Configuring Proxy ARP

You can configure proxy Address Resolution Protocol (ARP) to enable the switch to respond to ARP queries for network addresses by offering its own media access control (MAC) address. With proxy ARP enabled, the switch captures and routes traffic to the intended destination.

To configure proxy ARP on a single interface:

[edit interfaces]

```
user@switch# set xe-0/0/3 unit 0 proxy-arp restricted
```





**BEST PRACTICE:** We recommend that you configure proxy ARP in restricted mode. In restricted mode, the switch is not a proxy if the source and target IP addresses are on the same subnet. If you use unrestricted mode, disable gratuitous ARP requests on the interface to avoid the situation of the switch's response to a gratuitous ARP request appearing to the host to be an indication of an IP conflict:

To configure proxy ARP on a routed VLAN interface (RVI):

```
[edit interfaces]  
user@switch# set vlan unit 100 proxy-arp restricted
```

**Related  
Documentation**

- [Understanding Proxy ARP on page 1424](#)
- [Verifying That Proxy ARP Is Working Correctly on page 1683](#)
- [Understanding Routed VLAN Interfaces on page 1386](#)



## Configuration Statements

---



## address

```

Syntax  address address {
        arp ip-address (mac | multicast-mac) mac-address <publish>;
        broadcast address;
        destination address;
        destination-profile name;
        eui-64;
        master-only;
        multipoint-destination address dlcidlcid-identifier;
        multipoint-destination address {
            epd-threshold cells;
            inverse-arp;
            oam-liveness {
                up-count cells;
                down-count cells;
            }
            oam-period (disable | seconds);
            shaping {
                (cbr rate | rtvbr peak rate sustained rate burst length | vbr peak rate sustained rate burst
                 length);
                queue-length number;
            }
            vci vpi-identifier.vci-identifier;
        }
        primary;
        preferred;
        (vrrp-group | vrrp-inet6-group) group-number {
            (accept-data | no-accept-data);
            advertise-interval seconds;
            authentication-type authentication;
            authentication-key key;
            fast-interval milliseconds;
            (preempt | no-preempt) {
                hold-time seconds;
            }
            priority-number number;
            track {
                priority-cost seconds;
                priority-hold-time interface-name {
                    interface priority;
                    bandwidth-threshold bits-per-second {
                        priority;
                    }
                }
            }
            route ip-address/mask routing-instance instance-name priority-cost cost;
        }
        virtual-address [ addresses ];
    }
}

```

**Hierarchy Level** [edit interfaces *interface-name* unit *logical-unit-number* family *family*],  
 [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number*  
 family *family*]



**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure the interface address.

**Options** *address*—Address of the interface.

The remaining statements are explained separately.



.....  
**NOTE:** The `edit logical-systems` hierarchy is not available on QFabric systems.  
.....

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- Configuring the Protocol Family
- negotiate-address
- unnumbered-address (Ethernet)
- Junos OS System Basics Configuration Guide
- family




## alarm (STP)

<b>Syntax</b>	alarm;
<b>Hierarchy Level</b>	[edit protocols <a href="#">mstp interface</a> (all   <i>interface-name</i> ) <a href="#">bpdu-timeout-action</a> ], [edit protocols <a href="#">rstp interface</a> (all   <i>interface-name</i> ) <a href="#">bpdu-timeout-action</a> ], [edit protocols <a href="#">stp interface</a> (all   <i>interface-name</i> ) <a href="#">bpdu-timeout-action</a> ], [edit protocols <a href="#">vstp vlan <i>vlan-id</i> interface</a> (all   <i>interface-name</i> ) <a href="#">bpdu-timeout-action</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For interfaces configured for loop protection, configure the software to generate a message to be sent to the system log file to record the loop-protection event.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li> <li>• <a href="#">Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428</a></li> <li>• <a href="#">Example: Configuring Loop Protection to Prevent Interfaces from Transitioning from Blocking to Forwarding in a Spanning Tree on page 1504</a></li> <li>• <a href="#">Understanding Loop Protection for STP, RSTP, VSTP, and MSTP on page 1414</a></li> <li>• <a href="#">Understanding VSTP on page 1412</a></li> <li>• <a href="#">show spanning-tree bridge on page 1736</a></li> <li>• <a href="#">show spanning-tree interface</a></li> </ul>



## arp (Interfaces)

<b>Syntax</b>	<code>arp ip-address (mac   multicast-mac) mac-address publish;</code>
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inetaddress <i>address</i> ], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inetaddress <i>address</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Ethernet, Fast Ethernet, and Gigabit Ethernet interfaces only, configure Address Resolution Protocol (ARP) table entries, mapping IP addresses to MAC addresses.
<b>Options</b>	<p><b>ip-address</b>—IP address to map to the MAC address. The IP address specified must be part of the subnet defined in the enclosing <b>address</b> statement.</p> <p><b>mac mac-address</b>—MAC address to map to the IP address. Specify the MAC address as six hexadecimal bytes in one of the following formats: <i>nnnn.nnnn.nnnn</i> or <i>nn:nn:nn:nn:nn:nn</i>. For example, <b>0011.2233.4455</b> or <b>00:11:22:33:44:55</b>.</p> <p><b>multicast-mac mac-address</b>—Multicast MAC address to map to the IP address. Specify the multicast MAC address as six hexadecimal bytes in one of the following formats: <i>nnnn.nnnn.nnnn</i> or <i>nn:nn:nn:nn:nn:nn</i>. For example, <b>0011.2233.4455</b> or <b>00:11:22:33:44:55</b>.</p> <p><b>publish</b>—(Optional) Have the router or switch reply to ARP requests for the specified IP address. If you omit this option, the router or switch uses the entry to reach the destination but does not reply to ARP requests.</p>
<div>  <p><b>NOTE:</b> The <code>edit logical-systems</code> hierarchy is not available on QFabric systems.</p> </div>	
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Configuring Static ARP Table Entries</li> <li><a href="#">Configuring Static ARP Entries on page 1550</a></li> </ul>



## block

---

<b>Syntax</b>	block;
<b>Hierarchy Level</b>	[edit protocols mstp (Spanning Trees) <a href="#">interface</a> (all   <i>interface-name</i> ) <a href="#">bpdu-timeout-action</a> ], [edit protocols <a href="#">rstp interface</a> (all   <i>interface-name</i> ) <a href="#">bpdu-timeout-action</a> ], [edit protocols <a href="#">stp interface</a> (all   <i>interface-name</i> ) <a href="#">bpdu-timeout-action</a> ], [edit protocols <a href="#">vstp vlan</a> <i>vlan-id</i> <a href="#">interface</a> (all   <i>interface-name</i> ) <a href="#">bpdu-timeout-action</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure loop protection on a specific interface.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li> <li>• <a href="#">Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428</a></li> <li>• <a href="#">Example: Configuring Loop Protection to Prevent Interfaces from Transitioning from Blocking to Forwarding in a Spanning Tree on page 1504</a></li> <li>• <a href="#">Understanding Loop Protection for STP, RSTP, VSTP, and MSTP on page 1414</a></li> <li>• <a href="#">Understanding VSTP on page 1412</a></li> <li>• <a href="#">show spanning-tree bridge on page 1736</a></li> <li>• <a href="#">show spanning-tree interface</a></li> </ul>



## bpdu-block

---

**Syntax**    bpdu-block {  
              [interface](#) (all | [*interface-name*]);  
              [disable-timeout](#) *timeout*;  
              }

**Hierarchy Level**    [edit [ethernet-switching-options](#)]

**Release Information**    Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Configure BPDU protection on an interface. If the interface receives BPDUs, it is disabled.



.....  
**NOTE:** BPDU block protection is disabled on Node devices.  
.....

The statements are explained separately.

**Required Privilege Level**    routing—To view this statement in the configuration.  
                                  routing-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring Network Regions for VLANs with MSTP on page 1441](#)
- [Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428](#)
- [Unblocking an Interface That Receives BPDUs in Error on page 1557](#)
- [clear ethernet-switching bpdu-error on page 1685](#)
- [show spanning-tree bridge on page 1736](#)
- [show spanning-tree interface](#)



## bpdu-block-on-edge

---

<b>Syntax</b>	bpdu-block-on-edge;
<b>Hierarchy Level</b>	[edit protocols <a href="#">mstp</a> ], [edit protocols <a href="#">rstp</a> ], [edit protocols <a href="#">vstp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure bridge protocol data unit (BPDU) protection on all edge ports of a switch.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Understanding VSTP on page 1412</a></li> <li>• <a href="#">Example: Configuring BPDU Protection on STP Interfaces to Prevent STP Miscalculations on page 1495</a></li> <li>• <a href="#">Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428</a></li> <li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li> <li>• <a href="#">clear ethernet-switching bpdu-error on page 1685</a></li> <li>• <a href="#">show spanning-tree bridge on page 1736</a></li> <li>• <a href="#">show spanning-tree interface</a></li> </ul>



## bpdu-timeout-action

---

<b>Syntax</b>	<pre>bpdu-timeout-action {     alarm;     block; }</pre>
<b>Hierarchy Level</b>	[edit protocols <a href="#">mstp interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">rstp interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">stp interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">vstp vlan <i>vlan-id</i> interface</a> (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Configure the BPDU timeout action on a specific interface. You must configure at least one action (<b>alarm</b>, <b>block</b>, or both).</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428</a></li><li>• <a href="#">Example: Configuring Loop Protection to Prevent Interfaces from Transitioning from Blocking to Forwarding in a Spanning Tree on page 1504</a></li><li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li><li>• <a href="#">Understanding Loop Protection for STP, RSTP, VSTP, and MSTP on page 1414</a></li><li>• <a href="#">Understanding VSTP on page 1412</a></li><li>• <a href="#">show spanning-tree bridge on page 1736</a></li><li>• <a href="#">show spanning-tree interface</a></li></ul>



## bridge-priority

<b>Syntax</b>	<code>bridge-priority <i>priority</i>;</code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">mstp</a> ], [edit protocols <a href="#">mstp</a> <i>msti-id</i> ], [edit protocols <a href="#">rstp</a> ], [edit protocols <a href="#">stp</a> ], [edit protocols <a href="#">vstp</a> <i>vlan</i> <i>vlan-id</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the bridge priority. The bridge priority determines which bridge is elected as the root bridge. If two bridges have the same path cost to the root bridge, the bridge priority determines which bridge becomes the designated bridge for a LAN segment.
<b>Options</b>	<b><i>priority</i></b> —Bridge priority. It can be set only in increments of 4096. <b>Range:</b> 0 through 61,440 <b>Default:</b> 32,768
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li> <li>• <a href="#">Understanding MSTP on page 1410</a></li> <li>• <a href="#">Understanding VSTP on page 1412</a></li> <li>• <a href="#">show spanning-tree bridge on page 1736</a></li> <li>• <a href="#">show spanning-tree interface</a></li> </ul>



## broadcast

<b>Syntax</b>	<code>broadcast address;</code>
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>family</i> address <i>address</i> ], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>family</i> <b>address</b> <i>address</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Set the broadcast address on the network or subnet. On a subnet you cannot specify a host address of 0, nor can you specify a broadcast address.
<b>Default</b>	The default broadcast address has a host portion of all ones.
<b>Options</b>	<b>address</b> —Broadcast address. The address must have a host portion of either all ones or all zeros. You cannot specify the addresses 0.0.0.0 or 255.255.255.255.



**NOTE:** The edit logical-systems hierarchy is not available on QFabric systems.

<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the Interface Address on page 1545</a></li> </ul>

## ccc

<b>Syntax</b>	<code>ccc;</code>
<b>Hierarchy Level</b>	[edit <b>interfaces</b> <i>ge-fpc/slot/ port unit</i> <i>logical-unit-number</i> family]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the logical interface as a circuit cross-connect (CCC).
<b>Default</b>	You must configure a logical interface to be able to use the physical device.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.



## cost (STP)

<b>Syntax</b>	<code>cost cost;</code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">mstp interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">mstp msti</a> <i>msti-id</i> <a href="#">interface</a> <i>interface-name</i> ], [edit protocols rstp (Spanning Trees) <a href="#">interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">stp interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">vstp vlan</a> <i>vlan-id</i> <a href="#">interface</a> (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), VLAN Spanning Tree Protocol (VSTP), or Multiple Spanning Tree Protocol (MSTP), configure the link cost to control which bridge is the designated bridge and which interface is the designated interface.
<b>Default</b>	Link cost is determined by the link speed.
<b>Options</b>	<b>cost</b> —Link cost associated with the port. <b>Range:</b> 1 through 200,000,000
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Understanding MSTP on page 1410</a></li> <li>• <a href="#">Overview of Spanning-Tree Protocols on page 1409</a></li> <li>• <a href="#">Understanding VSTP on page 1412</a></li> <li>• <a href="#">show spanning-tree bridge on page 1736</a></li> <li>• <a href="#">show spanning-tree interface</a></li> </ul>



## configuration-name (MSTP)

---

<b>Syntax</b>	configuration-name <i>configuration-name</i> ;
<b>Hierarchy Level</b>	[edit protocols <a href="#">mstp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify the configuration name. The configuration name is the MSTP region name carried in the MSTP BPDUs.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428</a></li><li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li><li>• <a href="#">Understanding MSTP on page 1410</a></li><li>• <a href="#">show spanning-tree bridge on page 1736</a></li><li>• <a href="#">show spanning-tree interface</a></li></ul>



## connections (Circuits)

**Syntax**

```
connections {
  interface-switch connection-name {
    interface interface-name.unit-number;
  }
  lsp-switch connection-name {
    transmit-lsp label-switched-path;
    receive-lsp label-switched-path;
  }
  p2mp-receive-switch {
    output-interface [ interface-name.unit-number ];
    receive-p2mp-lsp receiving-point-to-multipoint-lsp;
  }
  p2mp-transmit-switch {
    input-interface interface-name.unit-number;
    transmit-p2mp-lsp transmitting-point-to-multipoint-lsp;
  }
  remote-interface-switch connection-name {
    interface interface-name.unit-number;
    receive-lsp label-switched-path;
    transmit-lsp label-switched-path;
  }
}
```

**Hierarchy Level** [edit logical-systems *logical-system-name* protocols],  
[edit protocols]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Define the connection between two circuits in a CCC connection.

**Options** The statements are explained separately.



**NOTE:** The edit logical-systems hierarchy is not available on QFabric systems.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- Configuring Layer 2 Switching Cross-Connects Using CCC
- Configuring MPLS LSP Tunnel Cross-Connects Using CCC
- Configuring LSP Stitching Cross-Connects Using CCC
- Configuring TCC
- Configuring CCC Switching for Point-to-Multipoint LSPs



## cut-through

---

<b>Syntax</b>	cut-through;
<b>Hierarchy Level</b>	[edit forwarding-options]
<b>Description</b>	Configures all the interfaces in the QFX series switch or QFabric to use cut-through forwarding mode instead of store-and-forward mode.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring the Forwarding Mode on page 1565</a></li></ul>

## description (VLAN)

---

<b>Syntax</b>	description <i>text-description</i> ;
<b>Hierarchy Level</b>	[edit <b>vlan</b> <i>vlan-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Provide a textual description for the VLAN. The text has no effect on the operation of the VLAN or switch.
<b>Options</b>	<b>text-description</b> —Text to describe the interface. It can contain letters, numbers, and hyphens (-) and can be up to 255 characters long. If the text includes spaces, enclose the entire text in quotation marks.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Setting Up Basic Bridging and a VLAN on the QFX Series on page 1467</a></li><li>• <a href="#">Understanding Bridging on page 1381</a></li><li>• <a href="#">show vlans on page 1752</a></li></ul>



## disable (STP)

<b>Syntax</b>	disable;
<b>Hierarchy Level</b>	[edit protocols <a href="#">mstp</a> ], [edit protocols <a href="#">mstp</a> <a href="#">interface</a> <i>interface-name</i> ], [edit protocols <a href="#">mstp</a> <a href="#">msti</a> <i>msti-id</i> <a href="#">vlan</a> ( <i>vlan-id</i>   <i>vlan-name</i> ) <a href="#">interface</a> <i>interface-name</i> ], [edit protocols <a href="#">rstp</a> ], [edit protocols <a href="#">rstp</a> <a href="#">interface</a> <i>interface-name</i> ], [edit protocols <a href="#">stp</a> ], [edit protocols <a href="#">stp</a> <a href="#">interface</a> <i>interface-name</i> ], [edit protocols <a href="#">vstp</a> ], [edit protocols <a href="#">vstp</a> <a href="#">vlan</a> <i>vlan-id</i> <a href="#">interface</a> (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Disable STP, MSTP, RSTP, or VSTP on the switch or on a specific interface.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li> <li>• <a href="#">Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428</a></li> <li>• <a href="#">Understanding MSTP on page 1410</a></li> <li>• <a href="#">Overview of Spanning-Tree Protocols on page 1409</a></li> <li>• <a href="#">Understanding VSTP on page 1412</a></li> <li>• <a href="#">show spanning-tree bridge on page 1736</a></li> <li>• <a href="#">show spanning-tree interface</a></li> </ul>




## disable-timeout (BPDU)

---

<b>Syntax</b>	<code>disable-timeout <i>timeout</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options bpd-block</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For interfaces configured for BPDU protection, specify the amount of time an interface receiving BPDUs is disabled.
<b>Default</b>	The disable timeout is not enabled.
<b>Options</b>	<b>timeout:</b> Length of time, in seconds, that the interface receiving BPDUs is disabled. Once the timeout expires, the interface is brought back into service. <b>Range:</b> 10 through 3600 seconds
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li><li>• <a href="#">Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428</a></li><li>• <a href="#">Example: Configuring BPDU Protection on STP Interfaces to Prevent STP Miscalculations on page 1495</a></li><li>• <a href="#">Understanding BPDU Protection for STP, RSTP, and MSTP on page 1413</a></li><li>• <a href="#">show spanning-tree bridge on page 1736</a></li><li>• <a href="#">show spanning-tree interface on page 1741</a></li></ul>



## drop-threshold

<b>Syntax</b>	<code>drop-threshold <i>number</i>;</code>
<b>Hierarchy Level</b>	<code>[edit vlans <i>vlan-name</i> dot1q-tunneling layer2-protocol-tunneling (all   <i>protocol-name</i>)]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 10.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Specify the maximum number of Layer 2 PDUs of the specified protocol that can be received per second on the interfaces in a specified VLAN before the switch begins dropping the Layer 2 PDUs. The drop threshold value must be less than or equal to the shutdown threshold value.</p> <p>L2PT processing is done by the CPU, and L2PT traffic to the CPU is rate-limited to a maximum of 1000 pps. If traffic is received at a rate faster than this limit, the rate limit causes the traffic to be dropped before it hits the threshold and the dropped packets are not reported in L2PT statistics. This can also occur if you configure a drop threshold that is less than 1000 pps but traffic is received at a faster rate. For example, if you configure a drop threshold of 900 pps and the VLAN receives traffic at rate of 1100 pps, L2PT statistics will show that 100 packets were dropped. The 100 packets dropped because of the rate limit will not be reported. Similarly, if you do not configure a drop threshold and the VLAN receives traffic at rate of 1100 pps, the 100 packets dropped because of the rate limit are not reported.</p>
	<div>  <p><b>NOTE:</b> If the drop threshold value is greater than the shutdown threshold value and you try to commit the configuration, the commit operation fails.</p> </div>
	You can specify a drop threshold value without specifying a shutdown threshold value.
<b>Default</b>	No drop threshold is specified.
<b>Options</b>	<p><b><i>number</i></b>—Maximum number of Layer 2 PDUs of the specified protocol that can be received per second on the interfaces in a specified VLAN before the switch begins dropping the Layer 2 PDUs.</p> <p><b>Range:</b> 1 through 1000</p>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Layer 2 Protocol Tunneling on EX Series Switches</a></li> <li>• <a href="#">Configuring Layer 2 Protocol Tunneling on EX Series Switches (CLI Procedure)</a></li> <li>• <a href="#">Configuring Layer 2 Protocol Tunneling on page 1563</a></li> <li>• <a href="#">shutdown-threshold on page 1670</a></li> </ul>



## edge (STP)

---

<b>Syntax</b>	edge;
<b>Hierarchy Level</b>	[edit protocols <a href="#">mstp interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">mstp msti</a> <i>msti-id</i> <a href="#">interface</a> <i>interface-name</i> ], [edit protocols <a href="#">rstp interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">stp interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">vstp vlan</a> <i>vlan-id</i> <a href="#">interface</a> (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), VLAN Spanning Tree Protocol (VSTP), or Multiple Spanning Tree Protocol (MSTP), configure interfaces as edge interfaces. Edge interfaces immediately transition to a forwarding state.
<b>Default</b>	Edge interfaces are not enabled.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li><li>• <a href="#">Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428</a></li><li>• <a href="#">Understanding MSTP on page 1410</a></li><li>• <a href="#">Overview of Spanning-Tree Protocols on page 1409</a></li><li>• <a href="#">Understanding VSTP on page 1412</a></li><li>• <a href="#">show spanning-tree bridge on page 1736</a></li><li>• <a href="#">show spanning-tree interface</a></li></ul>



## ethernet-switching-options

```

Syntax ethernet-switching-options {
  analyzer {
    name {
      input {
        egress {
          interface (all | interface-name);
        }
        ingress {
          interface (all | interface-name);
          vlan (vlan-id | vlan-name);
        }
      }
      output {
        interface interface-name;
        ip-address ip-address;
        vlan (vlan-id | vlan-name);
      }
    }
  }
  bpdu-block {
    interface (all | [interface-name]);
    disable-timeout timeout;
  }
  dot1q-tunneling {
    ether-type (0x8100 | 0x88a8 | 0x9100)
  }
  interfaces interface-name {
    no-mac-learning;
  }
  mac-table-aging-time seconds {
  }
  port-error-disable {
    disable-timeout timeout;
  }
  secure-access-port {
    dhcp-snooping-file {
      location local_pathname | remote_URL;
      timeout seconds;
      write-interval seconds;
    }
  }
  interface (all | interface-name) {
    allowed-mac {
      mac-address-list;
    }
    (dhcp-trusted | no-dhcp-trusted);
    fcoe-trusted;
    mac-limit limit action action;
    no-allowed-mac-log;
  }
  vlan (all | vlan-name) {
    (arp-inspection | no-arp-inspection) [
      forwarding-class (for DHCP Snooping or DAI Packets) class-name;
    ]
  }
}

```



```

dhcp-option82 {
  circuit-id {
    prefix (Circuit ID for Option 82) hostname;
    use-interface-description;
    use-vlan-id;
  }
  remote-id {
    prefix (Remote ID for Option 82) hostname | mac | none;
    use-interface-description;
    use-string string;
  }
  vendor-id <string>;
}
(examine-dhcp | no-examine-dhcp) {
  forwarding-class (for DHCP Snooping or DAI Packets) class-name;
}
examine-fip {
  examine-vn2vn {
    beacon-period milliseconds;
  }
  fc-map fc-map-value;
}
mac-move-limit limit <fabric-limit limit action action>;
}
}
storm-control {
  interface (all | interface-name) {
    bandwidth bandwidth;
    no-broadcast;
    no-multicast;
    no-unknown-unicast;
  }
}
traceoptions {
  file filename <files number> <no-stamp> <replace> <size size> <world-readable |
no-world-readable>;
  flag flag <disable>;
}
unknown-unicast-forwarding {
  vlan (all | vlan-name) {
    interface interface-name;
  }
}
}
}

```

Hierarchy Level [\[edit\]](#)

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure Ethernet switching options.

The remaining statements are explained separately.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.



- Related Documentation**
- [Understanding Port Mirroring on page 4313](#)
  - [Overview of Access Port Protection on page 4105](#)
  - [Understanding Storm Control on page 4125](#)
  - [Understanding Unknown Unicast Forwarding on page 4126](#)

## eui-64

---

<b>Syntax</b>	eui-64;
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> unit <i>number</i> family inet6 address <i>address</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.3 for EX Series switches. Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	For interfaces that carry IP version 6 (IPv6) traffic, automatically generate the host number portion of interface addresses. Not supported on QFX Series switches.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the Interface Address on page 1545</a></li> </ul>



## filter (VLANs)

---

<b>Syntax</b>	filter (input   output) <i>filter-name</i> ;
<b>Hierarchy Level</b>	[edit <b>vlan</b> <i>vlan-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Apply a firewall filter to traffic ingressing or egressing a VLAN.
<b>Default</b>	All incoming traffic is accepted unmodified to a VLAN, and all outgoing traffic is sent unmodified from a VLAN.
<b>Options</b>	<b><i>filter-name</i></b> —Name of a firewall filter defined at the [edit firewall family <i>family-name</i> filter] hierarchy level.  <b>input</b> —Apply a firewall filter to VLAN ingress traffic.  <b>output</b> —Apply a firewall filter to VLAN egress traffic.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Firewall Filters on page 4177</a></li><li>• <a href="#">Overview of Firewall Filters on page 4071</a></li></ul>

## force-version

---

<b>Syntax</b>	force-version stp;
<b>Hierarchy Level</b>	[edit protocols <b>vstp</b> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Force VLAN Spanning Tree Protocol (VSTP) to use the STP protocol instead of the default protocol, RSTP.
<b>Options</b>	<b>stp</b> —Spanning Tree Protocol
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show spanning-tree bridge on page 1736</a></li><li>• show spanning-tree interface</li><li>• <a href="#">Understanding VSTP on page 1412</a></li></ul>



## forward-delay

<b>Syntax</b>	<code>forward-delay <i>seconds</i>;</code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">mstp</a> ], [edit protocols <a href="#">rstp</a> ], [edit protocols <a href="#">stp</a> ], [edit protocols <a href="#">vstp</a> <a href="#">vlan</a> <i>vlan-id</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), VLAN Spanning Tree Protocol (VSTP), or Multiple Spanning Tree Protocol (MSTP), specify how long a bridge interface remains in the listening and learning states before transitioning to the forwarding state.
<b>Options</b>	<p><b><i>seconds</i></b>—Number of seconds the bridge interface remains in the listening and learning states.</p> <p><b>Range:</b> 4 through 30 seconds</p> <p><b>Default:</b> 15 seconds</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li> <li>• <a href="#">Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428</a></li> <li>• <a href="#">Understanding MSTP on page 1410</a></li> <li>• <a href="#">Overview of Spanning-Tree Protocols on page 1409</a></li> <li>• <a href="#">Understanding VSTP on page 1412</a></li> <li>• <a href="#">show spanning-tree bridge on page 1736</a></li> <li>• <a href="#">show spanning-tree interface</a></li> </ul>



## group-limit

---

<b>Syntax</b>	<code>group-limit <i>limit</i>;</code>
<b>Hierarchy Level</b>	[edit protocols igmp-snooping vlan (IGMP Snooping) <i>vlan-id</i>   <i>vlan-number</i> interface (IGMP Snooping) <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.5 for EX Series switches. Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure a limit for the number of multicast groups allowed on the specified interface. After this limit is reached, new reports are ignored and related flows are not flooded on the interface.
<b>Default</b>	No group limits are configured.
<b>Options</b>	<b>limit</b> —Number that represents the maximum number of multicast groups allowed on the specified interface. <b>Range:</b> 0 through 65535
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Configuring IGMP Snooping on EX Series Switches</li><li>• Configuring IGMP Snooping (CLI Procedure)</li><li>• Configuring IGMP Snooping (J-Web Procedure)</li><li>• group (IGMP Snooping)</li></ul>



## hello-time

---

<b>Syntax</b>	<code>hello-time seconds;</code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">mstp</a> ], [edit protocols <a href="#">rstp</a> ], [edit protocols <a href="#">rstp</a> ], [edit protocols <a href="#">vstp</a> <a href="#">vlan</a> <i>vlan-id</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), VLAN Spanning Tree Protocol (VSTP), or Multiple Spanning Tree Protocol (MSTP), specify the time interval at which the root bridge transmits configuration BPDUs.
<b>Options</b>	<b>seconds</b> —Number of seconds between transmissions of configuration BPDUs. <b>Range:</b> 1 through 10 seconds <b>Default:</b> 2 seconds
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li> <li>• <a href="#">Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428</a></li> <li>• <a href="#">Understanding MSTP on page 1410</a></li> <li>• <a href="#">Overview of Spanning-Tree Protocols on page 1409</a></li> <li>• <a href="#">Understanding VSTP on page 1412</a></li> <li>• <a href="#">show spanning-tree bridge on page 1736</a></li> <li>• <a href="#">show spanning-tree interface</a></li> </ul>



## interface (BPDU)

---

<b>Syntax</b>	interface (all   <i>interface-name</i> );
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options bpd-block</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Apply BPDU protection to all interfaces or one or more interfaces.
<b>Options</b>	<p><b>all</b>—All interfaces.</p> <p><b><i>interface-name</i></b>—Name of the interface.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li><li>• <a href="#">Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428</a></li><li>• <a href="#">Understanding BPDU Protection for STP, RSTP, and MSTP on page 1413</a></li><li>• <a href="#">show spanning-tree bridge on page 1736</a></li><li>• <a href="#">show spanning-tree interface on page 1741</a></li></ul>



## interface (Spanning Trees)

<b>Syntax</b>	<pre> interface <i>interface-name</i> {   arp-on-stp;   bpdu-timeout-action     block;     log;   cost <i>cost</i>;   disable;   edge;   mode <i>mode</i>;   no-root-port;   priority <i>priority</i>; }</pre>
<b>Hierarchy Level</b>	<pre> [edit protocols mstp], [edit protocols mstp msti <i>msti-id</i>], [edit protocols rstp], [edit protocols stp], [edit protocols vstp vlan (all   <i>vlan-id</i>   <i>vlan-name</i>)]</pre>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement updated in Junos OS Release 9.4 for EX Series switches to add VSTP support.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>
<b>Description</b>	<p>For Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), VLAN Spanning Tree Protocol (VSTP), or Multiple Spanning Tree Protocol (MSTP), configure an interface.</p> <p>The <b>edge</b>, <b>mode</b>, and <b>no-root-port</b> options are not available at the <code>[edit protocols mstp msti <i>msti-id</i>]</code> hierarchy level.</p>
<b>Options</b>	<p><b><i>interface-name</i></b>—Name of an interface.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>show spanning-tree bridge</li> <li>show spanning-tree interface</li> <li>Example: Configuring Network Regions for VLANs with MSTP on EX Series Switches</li> <li>Example: Configuring Faster Convergence and Improving Network Stability with RSTP on EX Series Switches</li> <li><a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li> <li><a href="#">Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428</a></li> <li>Configuring VSTP (CLI Procedure)</li> </ul>



- [show spanning-tree bridge on page 1736](#)

## interface (Storm Control)

---

<b>Syntax</b>	<pre>interface (all   <i>interface-name</i>) {     <i>bandwidth</i> <i>bandwidth</i>;     no-broadcast;     no-multicast;     no-unknown-unicast; }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options storm-control</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Apply storm control to all interfaces or to the specified interface.</p> <p>The remaining statement is explained separately.</p>
<b>Default</b>	Storm control is disabled.
<b>Options</b>	<p><b>all</b>—Apply storm control to all interfaces.</p> <p><b><i>interface-name</i></b>—Apply storm control to the specified interface.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding Storm Control on page 4125</a></li><li>• <a href="#">Example: Configuring Storm Control on page 4143</a></li></ul>



## interface (STP)

<b>Syntax</b>	<pre>interface <i>interface-name</i> {     disable;     cost <i>cost</i>;     edge;     mode <i>mode</i>;     no-root-port;     priority <i>priority</i>; }</pre>
<b>Hierarchy Level</b>	<pre>[edit protocols <a href="#">mstp</a>], [edit protocols <a href="#">mstp msti</a>], [edit protocols <a href="#">rstp</a>], [edit protocols <a href="#">stp</a>], [edit protocols <a href="#">vstp vlan</a> <i>vlan-id</i>]</pre>
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), VLAN Spanning Tree Protocol (VSTP), or Multiple Spanning Tree Protocol (MSTP), configure an interface.
<b>Options</b>	<p><i>interface-name</i>—Name of a Gigabit Ethernet interface.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li> <li>• <a href="#">Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428</a></li> <li>• <a href="#">Understanding RSTP on page 1411</a></li> <li>• <a href="#">Understanding MSTP on page 1410</a></li> <li>• <a href="#">Overview of Spanning-Tree Protocols on page 1409</a></li> <li>• <a href="#">Understanding VSTP on page 1412</a></li> <li>• <a href="#">show spanning-tree bridge on page 1736</a></li> <li>• <a href="#">show spanning-tree interface</a></li> </ul>



## interface (VLANs)

---

<b>Syntax</b>	<code>interface <i>interface-name</i> {     <b>mapping</b> (native (push   swap)   tag (push   swap)); }</code>
<b>Hierarchy Level</b>	[edit <b>vlan</b> <i>vlan-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For a specific VLAN, configure an interface.
<b>Options</b>	<i>interface-name</i> —Name of the interface.  The remaining statement is explained separately.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Setting Up Basic Bridging and a VLAN on the QFX Series on page 1467</a></li><li>• <a href="#">Configuring VLANs on page 1553</a></li><li>• <a href="#">Understanding Bridging on page 1381</a></li></ul>

## interfaces

---

<b>Syntax</b>	<code>interfaces <i>interface-name</i> {     <b>no-mac-learning</b>; }</code>
<b>Hierarchy Level</b>	[edit <b>ethernet-switching-options</b> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure settings for interfaces that have been assigned to family <b>ethernet-switching</b> .
<b>Options</b>	<i>interface-name</i> —Name of an interface that is configured for family <b>ethernet-switching</b> .  The remaining statement is explained separately.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.



## l3-interface (VLAN)

<b>Syntax</b>	<code>l3-interface vlan.logical-interface-number;</code>
<b>Hierarchy Level</b>	[edit <b>vlan</b> <i>vlan-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Associate a Layer 3 interface with the VLAN. Configure Layer 3 interfaces on trunk ports to allow the interface to transfer traffic between VLANs. Traffic between VLANs must be routed, which requires a common Layer 3 interface.
<b>Default</b>	No Layer 3 (routing) interface is associated with the VLAN.
<b>Options</b>	<code>vlan.logical-interface-number</code> —Number of the logical interface defined with a <b>set interfaces vlan unit</b> command. For the logical interface number, use the same number you configure in the <b>unit</b> statement.



**NOTE:** This statement is not supported on QFabric systems.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show ethernet-switching interfaces on page 1347</a></li> <li>• <a href="#">show vlans on page 1752</a></li> </ul>



## mac-limit

---

<b>Syntax</b>	<code>mac-limit <i>number</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">vlans</a> <i>vlan-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the number of MAC addresses allowed on a VLAN.
<b>Default</b>	MAC limit is disabled.
<b>Options</b>	<i>number</i> —Maximum number of MAC addresses. <b>Range:</b> 1 through 32768



NOTE: This statement is not supported on QFabric systems.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show vlans on page 1752</a></li><li>• <a href="#">Example: Setting Up Basic Bridging and a VLAN on the QFX Series on page 1467</a></li><li>• <a href="#">Configuring MAC Table Aging on page 1549</a></li><li>• <a href="#">Understanding Bridging on page 1381</a></li></ul>



---

## mac-notification


---

<b>Syntax</b>	<pre>mac-notification {   notification-interval <i>seconds</i>; }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Enable MAC notification for a switch. If you configure this statement without setting a notification interval, MAC notification is enabled with the default MAC notification interval of 30 seconds.</p> <p>The remaining statement is explained separately.</p>
<b>Default</b>	MAC notification is disabled by default.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring MAC Notification on page 1547</a></li></ul>



## mac-table-aging-time

---

<b>Syntax</b>	<code>mac-table-aging-time seconds;</code>
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options</a> ], [edit <a href="#">vlans</a> <i>vlan-name</i> ]
<b>Release Information</b>	Statement introduced for specific VLANs in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Define how long entries remain in the Ethernet switching table before expiring:</p> <ul style="list-style-type: none"><li>• If you specify this statement at the <b>[ethernet-switching-options]</b> hierarchy level, it applies to all VLANs on the switch.</li><li>• If you specify this statement at the <b>[vlans]</b> hierarchy level, it applies to the specified VLAN.</li></ul>
<b>Default</b>	300 seconds
<b>Options</b>	<p><b>seconds</b>—Time that entries remain in the Ethernet switching table before being removed.</p> <ul style="list-style-type: none"><li>• <b>Range</b>—60 to 1,000,000 seconds.</li><li>• <b>Default</b>—300 seconds.</li></ul>
<div> <b>NOTE:</b> The <code>vlans</code> hierarchy is not available on QFabric systems.</div>	
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Setting Up Basic Bridging and a VLAN on the QFX Series on page 1467</a></li><li>• <a href="#">Configuring MAC Table Aging on page 1549</a></li><li>• <a href="#">Understanding Bridging on page 1381</a></li><li>• <a href="#">show ethernet-switching statistics aging on page 1705</a></li></ul>



## max-age

---

<b>Syntax</b>	<code>max-age seconds;</code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">mstp</a> ], [edit protocols <a href="#">rstp</a> ], [edit protocols <a href="#">stp</a> ], [edit protocols <a href="#">vstp</a> <a href="#">vlan</a> <i>vlan-id</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), VLAN Spanning Tree Protocol (VSTP), or Multiple Spanning Tree Protocol (MSTP), specify the maximum age of received protocol BPDUs.
<b>Options</b>	<b>seconds</b> —Maximum age of received protocol BPDUs. <b>Range:</b> 6 through 40 seconds <b>Default:</b> 20 seconds
<b>Required Privilege Level</b>	<b>routing</b> —To view this statement in the configuration. <b>routing-control</b> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li> <li>• <a href="#">Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428</a></li> <li>• <a href="#">Understanding MSTP on page 1410</a></li> <li>• <a href="#">Overview of Spanning-Tree Protocols on page 1409</a></li> <li>• <a href="#">Understanding VSTP on page 1412</a></li> <li>• <a href="#">show spanning-tree bridge on page 1736</a></li> <li>• <a href="#">show spanning-tree interface on page 1741</a></li> </ul>



## max-hops

---

<b>Syntax</b>	<code>max-hops hops;</code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">mstp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Multiple Spanning Tree Protocol (MSTP), configure the maximum number of hops that a BPDU can be forwarded in the MSTP region.
<b>Options</b>	<p><i>hops</i> — Number of hops the BPDU can be forwarded.</p> <p><b>Range:</b> 1 through 255 hops</p> <p><b>Default:</b> 20 hops</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li><li>• <a href="#">Understanding MSTP on page 1410</a></li><li>• <a href="#">show spanning-tree bridge on page 1736</a></li><li>• <a href="#">show spanning-tree interface on page 1741</a></li></ul>



## members

<b>Syntax</b>	<code>members [(all   <i>names</i>   <i>vlan-ids</i>)];</code>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>ge-fpc/pic/port</i> unit 0 <a href="#">ethernet-switching</a> <i>vlan</i> ] [edit <a href="#">interfaces</a> <i>xe-fpc/pic/port</i> unit 0 <a href="#">ethernet-switching</a> <i>vlan</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For trunk interfaces, configure the VLANs for which the interface can carry traffic.



**TIP:** To display a list of all configured VLANs on the system, including VLANs that are configured but not committed, type ? after *vlan* or *vlangs* in your configuration mode command line. Note that only one VLAN is displayed for a VLAN range.

<b>Options</b>	<b>all</b> —Specify that this trunk interface be a member of all the VLANs that are configured on this switch. When a new VLAN is configured on the switch, this trunk interface automatically becomes a member of the VLAN.
----------------	--



**NOTE:** Each VLAN that is configured must have a specified VLAN ID when you attempt to commit the configuration; otherwise, the configuration commit fails. Also, *all* cannot be the name of a VLAN on the switch.

***names***—Names of one or more VLANs.

***vlan-ids***—Numeric identifiers of one or more VLANs.

<b>Required Privilege Level</b>	<b>routing</b> —To view this statement in the configuration. <b>routing-control</b> —To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Setting Up Basic Bridging and a VLAN on the QFX Series on page 1467</a></li> <li>• <a href="#">Understanding Bridging on page 1381</a></li> <li>• <a href="#">show ethernet-switching interfaces on page 1347</a></li> <li>• <a href="#">show vlans on page 1752</a></li> </ul>
------------------------------	---



## mode (STP)

---

<b>Syntax</b>	<code>mode mode;</code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">mstp interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">mstp msti msti-id interface interface-name</a> ], [edit protocols <a href="#">rstp interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">stp interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">vstp vlan vlan-id interface</a> (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), VLAN Spanning Tree Protocol (VSTP), or Multiple Spanning Tree Protocol (MSTP), configure the link mode to identify point-to-point links.
<b>Default</b>	For a full-duplex link, the default link mode is <b>point-to-point</b> . For a half-duplex link, the default link mode is <b>shared</b> .
<b>Options</b>	<i>mode</i> —Link mode: <ul style="list-style-type: none"><li>• <b>point-to-point</b>—Link is point to point.</li><li>• <b>shared</b>—Link is shared media.</li></ul>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li><li>• <a href="#">Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428</a></li><li>• <a href="#">Understanding MSTP on page 1410</a></li><li>• <a href="#">Overview of Spanning-Tree Protocols on page 1409</a></li><li>• <a href="#">Understanding VSTP on page 1412</a></li><li>• <a href="#">show spanning-tree bridge on page 1736</a></li><li>• <a href="#">show spanning-tree interface on page 1741</a></li></ul>



## msti

<b>Syntax</b>	<pre> msti <i>msti-id</i> {   vlan (<i>vlan-id</i>   <i>vlan-name</i>);   interface <i>interface-name</i> {     disable;     cost <i>cost</i>;     edge;     mode <i>mode</i>;     priority <i>priority</i>;   } } </pre>
<b>Hierarchy Level</b>	[edit protocols <a href="#">mstp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the Multiple Spanning Tree Instance (MSTI) identifier for Multiple Spanning Tree Protocol (MSTP). MSTI IDs are local to each region, so you can reuse the same MSTI ID in different regions.
<b>Default</b>	MSTI is disabled.
<b>Options</b>	<p><i>msti-id</i> —MSTI identifier.</p> <p><b>Range:</b> 1 through 4094. The Common Instance Spanning Tree (CIST) is always MSTI 0.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show spanning-tree bridge on page 1736</a></li> <li>• <a href="#">show spanning-tree interface on page 1741</a></li> <li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li> <li>• <a href="#">Understanding MSTP on page 1410</a></li> </ul>



## mstp

---

**Syntax**    mstp {  
              disable;  
              bpdu-timeout-action;  
              bridge-priority *priority*;  
              configuration-name (MSTP) *name*;  
              forward-delay *seconds*;  
              hello-time *seconds*;  
              interface (all | *interface-name*) {  
                  bpdu-timeout-action {  
                      block;  
                      alarm;  
                  }  
                  disable;  
                  cost *cost*;  
                  edge;  
                  mode *mode*;  
                  no-root-port;  
                  priority *priority*;  
              }  
              max-age *seconds*;  
              max-hops *hops*;  
              msti *msti-id* {  
                  vlan (*vlan-id* | *vlan-name*);  
                  interface *interface-name* {  
                      disable;  
                      cost *cost*;  
                      edge;  
                      mode *mode*;  
                      priority *priority*;  
                  }  
              }  
              traceoptions {  
                  file *name* <replace> <size *size*> <files *number*> <no-stamp>  
                      <(world-readable | no-world-readable)>;  
                  flag *flag* <*flag-modifier*> <disable>;  
              }  
              revision-level *revision-level*;  
          }

**Hierarchy Level**    [edit protocols]

**Release Information**    Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Configure Multiple Spanning Tree Protocol (MSTP). MSTP is defined in the IEEE 802.1Q-2003 specification and is used to create a loop-free topology in networks with multiple spanning-tree regions.

The statements are explained separately.

**Default**    MSTP is disabled.



<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li> <li>• <a href="#">Understanding MSTP on page 1410</a></li> <li>• <a href="#">show spanning-tree bridge on page 1736</a></li> <li>• <a href="#">show spanning-tree interface on page 1741</a></li> </ul>

## native-vlan-id

---

<b>Syntax</b>	native-vlan-id <i>vlan-id</i> ;
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> ge- <i>fpc/pic/port</i> unit 0 <a href="#">ethernet-switching</a> ], [edit <a href="#">interfaces</a> xe- <i>fpc/pic/port</i> unit 0 <a href="#">ethernet-switching</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the VLAN identifier to associate with untagged packets received on the interface.
<b>Options</b>	<i>vlan-id</i> —Numeric identifier of the VLAN. <b>Range:</b> 1 through 4094
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Junos OS Network Interfaces Configuration Guide</a></li> <li>• <a href="#">Understanding Bridging on page 1381</a></li> <li>• <a href="#">show ethernet-switching interfaces on page 1347</a></li> <li>• <a href="#">show vlans on page 1752</a></li> </ul>



## no-mac-learning (Global)

---

<b>Syntax</b>	no-mac-learning;
<b>Hierarchy Level</b>	[edit ethernet-switching-options <a href="#">interfaces</a> <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Disable MAC address learning for the specified interface. Disabling MAC address learning on an interface disables learning for all the VLANs of which that interface is a member.
<b>Default</b>	MAC learning is enabled.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>•</li></ul>

## no-mac-learning (Per VLAN)

---

<b>Syntax</b>	no-mac-learning;
<b>Hierarchy Level</b>	[edit <a href="#">vlans</a> <i>vlan-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Disables MAC address learning for the specified VLAN.
<b>Default</b>	MAC learning is enabled.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.



## no-root-port

<b>Syntax</b>	no-root-port;
<b>Hierarchy Level</b>	[edit protocols <a href="#">mstp interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">rstp interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">stp interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">vstp vlan</a> <i>vlan-id</i> <a href="#">interface</a> (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure an interface to be a spanning tree designated port. If the bridge receives more STP bridge protocol data units (BPDUs) on a root-protected interface, that interface transitions to a root-prevented STP state (inconsistency state) and the interface is blocked. This blocking prevents a bridge that should not be the root bridge from being elected the root bridge. When the bridge stops receiving more STP BPDUs on the root-protected interface, interface traffic is no longer blocked.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Root Protection to Enforce Root Bridge Placement in Spanning Trees on page 1499</a></li> <li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li> <li>• <a href="#">Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428</a></li> <li>• <a href="#">Understanding VSTP on page 1412</a></li> <li>• <a href="#">show spanning-tree bridge on page 1736</a></li> <li>• <a href="#">show spanning-tree interface on page 1741</a></li> </ul>



## notification-interval

---

<b>Syntax</b>	notification-interval <i>seconds</i> ;
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options</a> mac-notification]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Configure the MAC notification interval for a switch.</p> <p>The MAC notification interval is the amount of time the switch waits before sending learned or unlearned MAC address SNMP notifications to the network management server. For instance, if the MAC notification interval is set to 10, all of the MAC address addition and removal SNMP notifications are sent to the network management system every 10 seconds.</p>
<b>Options</b>	<p><i>seconds</i>—The MAC notification interval, in seconds.</p> <p><b>Range:</b> 1 through 60</p> <p><b>Default:</b> 30</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring MAC Notification on page 1547</a></li></ul>




## port-mode

<b>Syntax</b>	<code>port-mode (access   tagged-access   trunk);</code>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">unit</a> <i>logical-unit-number</i> family <a href="#">ethernet-switching</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure whether an interface on the switch operates in access, tagged access, or trunk mode.
<b>Default</b>	All switch interfaces are in access mode.
<b>Options</b>	<p><b>access</b>—Have the interface operate in access mode. In this mode, the interface can be in a single VLAN only. Access interfaces typically connect to network devices such as PCs, printers, IP telephones, and IP cameras.</p> <p><b>tagged-access</b>—Have the interface operate in access mode. In this mode, the interface can be in multiple VLANs. Access interfaces typically connect to network devices such as PCs, printers, IP telephones, and IP cameras.</p> <p><b>trunk</b>—Have the interface operate in trunk mode. In this mode, the interface can be in multiple VLANs and can multiplex traffic between different VLANs. Trunk interfaces typically connect to other switches and to routers on the LAN.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Reflective Relay on page 1549</a></li> <li>• <a href="#">Example: Configuring Reflective Relay for Use with VEPA Technology on page 1462</a></li> </ul>




## preferred

---

<b>Syntax</b>	preferred;
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>family</i> address <i>address</i> ], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>family</i> address <i>address</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure this address to be the preferred address on the interface. If you configure more than one address on the same subnet, the preferred source address is chosen by default as the source address when you initiate frame transfers to destinations on the subnet.
	<div> <b>NOTE:</b> The edit logical-systems hierarchy is not available on QFabric systems.</div>
<b>Default</b>	The lowest-numbered address on the subnet is the preferred address.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring the Interface Address on page 1545</a></li></ul>



## primary (Address on Interface)

<b>Syntax</b>	primary;
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>family</i> address <i>address</i> ], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>family</i> address <i>address</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure this address to be the primary address of the protocol on the interface. If the logical unit has more than one address, the primary address is used by default as the source address when packet transfer originates from the interface and the destination address does not indicate the subnet.
<div>  <p><b>NOTE:</b> The edit logical-systems hierarchy is not available on QFabric systems.</p> </div>	
<b>Default</b>	For unicast traffic, the primary address is the lowest non-127 (in other words, non-loopback) preferred address on the unit.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the Interface Address on page 1545</a></li> </ul>



## priority (STP)

---

<b>Syntax</b>	<code>priority <i>priority</i>;</code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">mstp interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">mstp msti</a> <i>msti-id</i> <a href="#">interface interface-name</a> ], [edit protocols <a href="#">rstp interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">stp interface</a> (all   <i>interface-name</i> )], [edit protocols <a href="#">vstp vlan</a> <i>vlan-id</i> <a href="#">interface</a> (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), VLAN Spanning Tree Protocol (VSTP), or Multiple Spanning Tree Protocol (MSTP), specify the interface priority to control which interface is elected as the root port.
<b>Options</b>	<b>priority</b> —Interface priority. The interface priority must be set in increments of 16. <b>Range:</b> 0 through 240 <b>Default:</b> 128
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li><li>• <a href="#">Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428</a></li><li>• <a href="#">Understanding MSTP on page 1410</a></li><li>• <a href="#">Overview of Spanning-Tree Protocols on page 1409</a></li><li>• <a href="#">Understanding VSTP on page 1412</a></li><li>• <a href="#">show spanning-tree bridge on page 1736</a></li><li>• <a href="#">show spanning-tree interface on page 1741</a></li></ul>



## protocols

```
Syntax protocols {
    bgp {
        disable;
        accept-remote-nexthop;
        advertise-external <conditional>;
        advertise-inactive;
        (advertise-peer-as | no-advertise-peer-as);
        authentication-algorithm (aes-128-cmac-96 | hmac-sha-1-96 | md5);
        authentication-key key;
        authentication-key-chain key-chain;
        bfd-liveness-detection {
            authentication {
                algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 |
                    meticulous-keyed-sha-1 | simple-password);
                key-chain key-chain-name;
                loose-check;
            }
            detection-time {
                threshold milliseconds;
            }
            hold-down-interval milliseconds;
            minimum-interval milliseconds;
            minimum-receive-interval milliseconds;
            multiplier number;
            no-adaptation;
            session-mode (automatic | multihop | single-hop);
            transmit-interval {
                minimum-interval milliseconds;
                threshold milliseconds;
            }
            version (1 | automatic);
        }
        cluster cluster-identifier;
        damping;
        description text-description;
        export [ policy-names ];
        family family-name {
            ... the family subhierarchies appear after the main [edit protocols bgp] hierarchy ...
        }
        graceful-restart {
            disable;
            restart-time seconds;
            stale-routes-time seconds;
        }
        group group-name {
            ... the group subhierarchy appears after the main [edit protocols bgp] hierarchy ...
        }
        hold-time seconds;
        import [ policy-names ];
        include-mp-next-hop;
        keep (all | none);
        local-address address;
    }
}
```



```
local-as autonomous-system <loops number> < alias> <private>;
local-preference local-preference;
log-updown;
metric-out (metric | igp (delay-med-update | offset) | minimum-igp offset);
mtu-discovery;
multihop {
    no-nexthop-change;
    ttl ttl-value;
}
no-aggregator-id;
no-client-reflect;
out-delay seconds;
outbound-route-filter {
    bgp-orf-cisco-mode;
    prefix-based {
        accept {
            inet;
            inet6;
        }
    }
}
passive;
path-selection {
    always-compare-med;
    as-path-ignore;
    cisco-non-deterministic;
    external-router-id;
    med-plus-igp {
        igp-multiplier number;
        med-multiplier number;
    }
}
peer-as autonomous-system;
preference preference;
remove-private;
tcp-mss segment-size;
traceoptions {
    file filename <files number> <size maximum-file-size> <world-readable |
        no-world-readable>;
    flag flag <flag-modifier> <disable>;
}
}
dcbx {
    disable;
    interface (interface-name | all) {
        disable;
        application-map application-map-name;
        applications {
            no-auto-negotiation;
        }
        enhanced-transmission-selection {
            no-auto-negotiation;
            recommendation-tlv {
                no-auto-negotiation;
            }
        }
    }
}
```



```

mode (auto-negotiate | ieee-dcbx | dcbx-version-1.01);
priority-flow-control {
    no-auto-negotiation;
}
}
}
iccp {
    authentication-key string;
    local-ip-addr local-ip-addr;
    peer ip-address {
        authentication-key string;
        backup-liveness-detection {
            backup-peer-ip ip-address;
        }
        liveness-detection {
            detection-time {
                threshold milliseconds;
            }
            minimum-interval milliseconds;
            minimum-receive-interval milliseconds;
            multiplier number;
            no-adaptation;
            transmit-interval {
                minimum-interval milliseconds;
                threshold milliseconds;
            }
            version (Liveness Detection) (1 | automatic);
        }
        local-ip-addr ipv4-address;
        session-establishment-hold-time seconds;
    }
    session-establishment-hold-time seconds;
    traceoptions {
        file <filename> <files number> <match regular-expression> <microsecond-stamp>
            <size size> <world-readable | no-world-readable>;
        flag flag;
        no-remote-trace;
    }
}
igmp-snooping {
    traceoptions {
        file filename <files number> <size size> <world-readable | no-world-readable> <match
            regex>;
        flag flag (detail | disable | receive | send);
    }
}
vlan vlan-name {
    disable {
        interface interface-name;
    }
    interface interface-name {
        group-limit limit;
        multicast-router-interface;
        static {
            group ip-address;
        }
    }
}

```



```
    robust-count number;
  }
}
isis {
  disable;
  export [ policy-names ];
  ignore-attached-bit;
  interface interface-name {
    bfd-liveness-detection {
      authentication {
        algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 |
          meticulous-keyed-sha-1 | simple-password);
        key-chain key-chain-name;
        loose-check;
      }
      detection-time {
        threshold milliseconds;
      }
      minimum-interval milliseconds;
      minimum-receive-interval milliseconds;
      multiplier number;
      no-adaptation;
      transmit-interval {
        minimum-interval milliseconds;
        threshold milliseconds;
      }
      version (1 | automatic);
    }
  }
  checksum;
  csnp-interval (seconds | disable);
  disable;
  hello-padding (adaptive | loose | strict);
  level (1 | 2) {
    disable;
    hello-authentication-key key;
    hello-authentication-type authentication;
    hello-interval seconds;
    hold-time seconds;
    ipv4-multicast-metric number;
    metric metric;
    passive;
    priority number;
  }
  lsp-interval milliseconds;
  mesh-group (value | blocked);
  no-ipv4-multicast;
  no-unicast-topology;
  passive;
  point-to-point;
}
level (1 | 2) {
  disable;
  authentication-key key;
  authentication-type authentication;
  external-preference preference;
  no-csnp-authentication;
```



```

    no-hello-authentication;
    no-psnp-authentication;
    preference preference;
    prefix-export-limit number;
    wide-metrics-only;
}
loose-authentication-check;
lsp-lifetime seconds;
max-areas number;
no-adjacency-holddown;
no-authentication-check;
no-ipv4-routing;
overload {
    advertise-high-metrics;
    timeout seconds;
}
reference-bandwidth reference-bandwidth;
rib-group {
    inet group-name;
}
topologies {
    ipv4-multicast;
}
traceoptions {
    file filename <files number> <size maximum-file-size> <world-readable |
        no-world-readable>;
    flag flag <flag-modifier> <disable>;
}
traffic-engineering {
    disable;
    family inet {
        shortcuts {
            multicast-rpf-routes;
        }
    }
}
}
lldp {
    disable;
    advertisement-interval seconds;
    hold-multiplier number;
    interface (LLDP) (all | interface-name) {
        disable;
    }
    traceoptions {
        file filename <files number> <size size> <world-readable | no-world-readable> <match
            regex>;
        flag flag (detail | disable | receive | send);
    }
}
mstp {
    disable;
    bpdu-timeout-action;
    bridge-priority priority;
    configuration-name (MSTP) name;
    forward-delay seconds;

```



```
hello-time seconds;
interface (all | interface-name) {
    disable;
    bpdu-timeout-action {
        block;
        alarm;
    }
    cost cost;
    edge;
    mode mode;
    no-root-port;
    priority priority;
}
max-age seconds;
max-hops hops;
msti msti-id {
    vlan (vlan-id | vlan-name);
    interface interface-name {
        disable;
        cost cost;
        edge;
        mode mode;
        priority priority;
    }
}
revision-level revision-level;
traceoptions {
    file filename <files number > <size size > <no-stamp | world-readable |
    no-world-readable>;
    flag flag;
}
}
ospf {
    disable;
    area area-id {
        area-range ip-prefix </prefix-length> <exact> <override-metric metric > <restrict>;
        context-identifier identifier
        interface interface-name {
            disable;
            authentication {
                md5 key-id key key-string <start-time YYYY-MM-DD.hh:mm>;
                simple-password key-string;
            }
            bandwidth-based-metrics {
                bandwidth value metric number;
            }
            bfd-liveness-detection {
                authentication {
                    algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 |
                    meticulous-keyed-sha-1 | simple-password);
                    key-chain key-chain-name;
                    loose-check;
                }
                detection-time {
                    threshold milliseconds;
                }
            }
        }
    }
}
```



```

    full-neighbors-only;
    minimum-interval milliseconds;
    minimum-receive-interval milliseconds;
    multiplier number;
    no-adaptation;
    transmit-interval {
        minimum-interval milliseconds;
        threshold milliseconds;
    }
    version (1 | automatic);
}
dead-interval seconds;
dynamic-neighbors;
flood-reduction;
hello-interval seconds;
interface-type (nbma | p2mp | p2p);
metric metric;
neighbor address <eligible>;
no-eligible-backup;
no-interface-state-traps;
no-neighbor-down-notification;
passive {
    traffic-engineering {
        remote-node-id address;
    }
}
poll-interval seconds;
priority number;
retransmit-interval seconds;
secondary;
te-metric metric;
topology (name | default | ipv4-multicast) {
    disable;
    bandwidth-based-metrics {
        bandwidth value;
        metric number;
    }
    metric metric;
}
transit-delay seconds;
}
network-summary-export [ policy-names ];
network-summary-import [ policy-names ];
nssa {
    area-range ip-prefix</prefix-length> <exact> <override-metric metric> <restrict>;
    default-lsa {
        default-metric metric;
        metric-type type;
        type-7;
    }
    (summaries | no-summaries);
}
stub <default-metric metric> <summaries | no-summaries>;
virtual-link neighbor-id router-id transit-area area-id {
    disable;
    authentication {

```



```

        md5 key-id key key-string <start-time YYYY-MM-DD.hh:mm>;
        simple-password key-string;
    }
    dead-interval seconds;
    demand-circuit;
    flood-reduction;
    hello-interval seconds;
    ipsec-sa sa-name;
    no-neighbor-down-notification;
    retransmit-interval seconds;
    topology (name | default | ipv4-multicast) {
        disable;
        metric metric;
    }
    transit-delay seconds;
}
}
database-protection {
    ignore-count number;
    ignore-time seconds;
    maximum-lsa number;
    reset-time seconds;
    warning-only;
    warning-threshold percent;
}
export [ policy-names ];
external-preference preference;
graceful-restart {
    disable;
    helper-disable <both | restart-signaling | standard>;
    no-strict-lsa-checking;
    notify-duration seconds;
    restart-duration seconds;
}
import [ policy-names ];
no-nssa-abr;
no-rfc-1583;
overload <timeout seconds>;
preference preference;
prefix-export-limit number;
reference-bandwidth reference-bandwidth;
rib-group group-name;
topology (default | ipv4-multicast | name) {
    overload;
    prefix-export-limit number;
    topology-id number;
}
}
traceoptions {
    file filename <files number> <size maximum-file-size> <world-readable |
        no-world-readable>;
    flag flag <flag-modifier> <disable>;
}
}
traffic-engineering {
    advertise-unnumbered-interfaces;
    credibility-protocol-preference;
    ignore-lsp-metrics;
}

```



```

    multicast-rpf-routes;
    no-topology;
    shortcuts <lsp-metric-into-summary>;
  }
}
pim {
  disable;
  assert-timeout seconds;
  dense-groups {
    addresses;
  }
  dr-election-on-p2p;
  export;
  family (inet | inet6) {
    disable;
  }
  graceful-restart {
    disable;
    restart-duration seconds;
  }
  import [ policy-names ];
  interface interface-name {
    accept-remote-source;
    disable;
    family (inet | inet6) {
      disable;
    }
    hello-interval seconds;
    mode (dense | sparse | sparse-dense);
    neighbor-policy [ policy-names ];
    override-interval milliseconds;
    priority number;
    propagation-delay milliseconds;
    reset-tracking-bit;
    version version;
  }
  join-load-balance;
  join-prune-timeout;
  nonstop-routing;
  override-interval milliseconds;
  propagation-delay milliseconds;
  reset-tracking-bit;
  rib-group group-name;
  rp {
    auto-rp {
      (announce | discovery | mapping);
      (mapping-agent-election | no-mapping-agent-election);
    }
    bootstrap {
      family (inet | inet6) {
        export [ policy-names ];
        import [ policy-names ];
        priority number;
      }
    }
  }
  bootstrap-import [ policy-names ];

```



```
bootstrap-export [ policy-names ];
bootstrap-priority number;
dr-register-policy [ policy-names ];
embedded-rp {
    group-ranges {
        destination-ip-prefix</prefix-length>;
    }
    maximum-rps limit;
}
local {
    family (inet | inet6) {
        address address;
        anycast-pim {
            disable;
            rp-set {
                address address <forward-msdp-sa>;
            }
            local-address address;
        }
        group-ranges {
            destination-ip-prefix</prefix-length>;
        }
        hold-time seconds;
        priority number;
    }
}
rp-register-policy [ policy-names ];
spt-threshold {
    infinity [ policy-names ];
}
static {
    address address {
        group-ranges {
            version version;
            destination-ip-prefix</prefix-length>;
        }
    }
}
}
rpf-selection {
    group group-address {
        source source-address {
            next-hop next-hop-address;
        }
        wildcard-source {
            next-hop next-hop-address;
        }
    }
    prefix-list prefix-list-addresses {
        source source-address {
            next-hop next-hop-address;
        }
        wildcard-source {
            next-hop next-hop-address;
        }
    }
}
```



```

traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable>;
    flag flag <flag-modifier> <disable>;
}
tunnel-devices [ mt-fpc/pic/port ];
}
rip {
    authentication-key password;
    authentication-type type;
    (check-zero | no-check-zero);
    group group-name {
        bfd-liveness-detection {
            authentication {
                algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 |
                    meticulous-keyed-sha-1 | simple-password);
                key-chain key-chain-name;
                loose-check;
            }
            detection-time {
                threshold milliseconds;
            }
            minimum-interval milliseconds;
            minimum-receive-interval milliseconds;
            multiplier number;
            no-adaptation;
            transmit-interval {
                minimum-interval milliseconds;
                threshold milliseconds;
            }
            version (1 | automatic);
        }
    }
    export [ policy-names ];
    import [ policy-names ];
    metric-out metric;
    neighbor neighbor-name {
        any-sender;
        authentication-key password;
        authentication-type type;
        bfd-liveness-detection {
            ... same statements as at the [edit protocols rip group group-name
                bfd-liveness-detection] hierarchy level ...
        }
        (check-zero | no-check-zero);
        import [ policy-names ];
        message-size number;
        metric-in metric;
        receive (both | none | version-1 | version-2);
        route-timeout seconds;
        send (broadcast | multicast | none | version-1);
        update-interval seconds;
    }
    preference preference;
    route-timeout seconds;
    update-interval seconds;
}
holddown seconds;

```



```
import [ policy-names ];
message-size number;
metric-in metric;
receive (both | none | version-1 | version-2);
rib-group group-name;
route-timeout seconds;
send (broadcast | multicast | none | version-1);
traceoptions {
    file filename <files number> <size maximum-file-size> <world-readable |
        no-world-readable>;
    flag flag <flag-modifier> <disable>;
}
update-interval seconds;
}
rstp {
    disable;
    bpdu-block-on-edge;
    bridge-priority priority;
    forward-delay seconds;
    hello-time seconds;
    interface (all | interface-name) {
        disable;
        bpdu-timeout-action {
            alarm;
            block;
        }
        cost cost;
        edge;
        mode mode;
        no-root-port;
        priority priority;
    }
    max-age seconds;
}
traceoptions {
    file filename <files number> <size size> <no-stamp> <world-readable |
        no-world-readable>;
    flag flag;
}
}
stp {
    disable;
    bridge-priority priority;
    forward-delay seconds;
    hello-time seconds;
    interface (all | interface-name) {
        disable;
        bpdu-timeout-action {
            alarm;
            block;
        }
        cost cost;
        edge;
        mode mode;
        no-root-port;
        priority priority;
    }
}
```



```

    }
    max-age seconds;
  }
  traceoptions {
    file filename <files number> <size size> <no-stamp | world-readable |
      no-world-readable>;
    flag flag;
  }
  uplink-failure-detection {
    group group-name {
      link-to-monitor interface-name;
      link-to-disable interface-name;
    }
  }
}
vstp {
  bpdu-block-on-edge;
  disable (Spanning Trees);
  force-version (Spanning Trees) stp;
  vlan (Spanning Trees) vlan-id {
    bridge-priority (Spanning Trees) priority;
    forward-delay (Spanning Trees) seconds;
    hello-time (Spanning Trees) seconds;
    interface (Spanning Trees) (all | interface-name) {
      bpdu-timeout-action (Spanning Trees) {
        block (Spanning Trees);
        log (Spanning Trees);
      }
      cost (Spanning Trees) cost;
      disable (Spanning Trees);
      edge (Spanning Trees);
      mode (Spanning Trees) mode;
      no-root-port (Spanning Trees);
      priority (Spanning Trees) priority;
    }
    max-age (Spanning Trees) seconds;
    traceoptions (Spanning Trees) {
      file filename <files number> <size size> <no-stamp | world-readable |
        no-world-readable>;
      flag flag;
    }
  }
}
}
}

```

Hierarchy Level [\[edit\]](#)

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure protocols.

The remaining statements are explained separately.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.



- Related Documentation**
- [Junos OS Routing Protocols Configuration Guide](#)

---

## proxy-arp

---

<b>Syntax</b>	proxy-arp (restricted   unrestricted);
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> ], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.6 for EX Series switches. <b>restricted</b> added in Junos OS Release 10.0 for EX Series switches. Statement introduced in Junos OS Release 12.2 for the QFX Series..
<b>Description</b>	For Ethernet interfaces only, configure the router or switch to respond to any ARP request, as long as the router or switch has an active route to the ARP request's target address.
<b>Default</b>	Proxy ARP is not enabled. The router or switch responds to an ARP request only if the destination IP address is its own.
<b>Options</b>	<ul style="list-style-type: none"><li>• <b>none</b>—The router or switch responds to any ARP request for a local or remote address if the router or switch has a route to the target IP address.</li><li>• <b>restricted</b>—(Optional) The router or switch responds to ARP requests in which the physical networks of the source and target are different and does not respond if the source and target IP addresses are in the same subnet. The router or switch must also have a route to the target IP address.</li><li>• <b>unrestricted</b>—(Optional) The router or switch responds to any ARP request for a local or remote address if the router or switch has a route to the target IP address.</li></ul>
<b>Default: unrestricted</b>	
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Configuring Restricted and Unrestricted Proxy ARP</li><li>• Configuring Proxy ARP (CLI Procedure)</li><li>• Example: Configuring Proxy ARP on an EX Series Switch</li><li>• Configuring Gratuitous ARP</li></ul>



## reflective-relay

<b>Syntax</b>	reflective-relay;
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">unit</a> <i>logical-unit-number</i> <a href="#">family</a> ethernet-switching]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure a switch interface to return packets back to a device on the same interface that was used to deliver the packets.
<b>Default</b>	Switch interfaces are not configured for reflective relay.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Reflective Relay for Use with VEPA Technology on page 1462</a></li> <li>• <a href="#">Configuring Reflective Relay on page 1549</a></li> </ul>

## revision-level

<b>Syntax</b>	revision-level <i>revision-level</i> ;
<b>Hierarchy Level</b>	[edit protocols <a href="#">mstp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For Multiple Spanning Tree Protocol (MSTP), set the revision number of the MSTP configuration.
<b>Default</b>	The revision number is disabled.
<b>Options</b>	<i>revision-level</i> —Revision number of the MSTP region configuration. <b>Range:</b> 0 through 65535
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Network Regions for VLANs with MSTP on page 1441</a></li> <li>• <a href="#">Understanding MSTP on page 1410</a></li> <li>• <a href="#">show spanning-tree bridge on page 1736</a></li> <li>• <a href="#">show spanning-tree interface on page 1741</a></li> </ul>



## rstp

---

**Syntax**    `rstp {  
    disable;  
    bpdu-block-on-edge;  
    bridge-priority priority;  
    forward-delay seconds;  
    hello-time seconds;  
    interface (all | interface-name) {  
        bpdu-timeout-action {  
            block;  
            alarm;  
        }  
        disable;  
        cost cost;  
        edge;  
        mode mode;  
        no-root-port;  
        priority priority;  
    }  
    max-age seconds;  
    traceoptions {  
        file name <replace> <size size> <files number> <no-stamp>  
        <(world-readable | no-world-readable)>;  
        flag flag <flag-modifier> <disable>;  
    }  
}`

**Hierarchy Level**    [edit protocols]

**Release Information**    Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Configure Rapid Spanning Tree Protocol (RSTP). RSTP is defined in the IEEE 802.1D-2004 specification and is used to prevent loops in Layer 2 networks, providing shorter convergence times than those provided with basic STP.

The statements are explained separately.

**Default**    RSTP is enabled on all Ethernet switching interfaces.

**Required Privilege Level**    routing—To view this statement in the configuration.  
                                  routing-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428](#)
- [Understanding RSTP on page 1411](#)
- [show spanning-tree bridge on page 1736](#)
- [show spanning-tree interface on page 1741](#)



## storm-control

**Syntax**

```
storm-control {
  action-shutdown;
  interface (all | interface-name) {
    bandwidth bandwidth;
    no-broadcast;
    no-multicast;
    no-unknown-unicast;
  }
}
```

**Hierarchy Level** [edit [ethernet-switching-options](#)]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Apply storm control to all interfaces or to the specified interfaces.

The statements are explained separately.



**NOTE:** The **no-multicast** option is not supported on QFabric systems.

**Default** By default, storm control is enabled on all switch interfaces at a level of 80 percent of the combined broadcast and unknown unicast streams. You can change the storm control level by configuring it as a specific bandwidth value.

When you configure storm control bandwidth on an aggregated Ethernet interface, each member of the aggregated interface is assigned that bandwidth. For example, if you configure 7000000 Kbps on aggregated interface **ae1**, and **ae1** has two members, **xe-2:0/0/0** and **xe-2:0/0/1**, each member is allowed a bandwidth level of 7000000 Kbps. Thus, the storm control bandwidth on **ae1** could be as much as 14000000 Kbps of combined broadcast and unknown unicast traffic.

**Required Privilege Level**

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Understanding Storm Control on page 4125](#)
- [Example: Configuring Storm Control on page 4143](#)
- [port-error-disable on page 4253](#)
- [disable-timeout on page 4238](#)
- [clear ethernet-switching port-error on page 4290](#)



## stp

<b>Syntax</b>	<pre> stp {   disable;   bridge-priority <i>priority</i>;   forward-delay <i>seconds</i>;   hello-time <i>seconds</i>;   interface (all   <i>interface-name</i>) {     disable;     bpdu-timeout-action {       block;       alarm;     }     cost <i>cost</i>;     edge;     mode <i>mode</i>;     no-root-port;     priority <i>priority</i>;   }   max-age <i>seconds</i>;   traceoptions {     file <i>name</i> &lt;replace&gt; &lt;size <i>size</i>&gt; &lt;files <i>number</i>&gt; &lt;no-stamp&gt;       &lt;(world-readable   no-world-readable)&gt;;     flag <i>flag</i> &lt;<i>flag-modifier</i>&gt; &lt;disable&gt;;   } } </pre>
<b>Hierarchy Level</b>	[edit protocols]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>When you explicitly configure STP, a switch uses the IEEE 802.1D 2004 specification, force version 0. This configuration runs a version of RSTP that is compatible with the classic, basic STP (defined in the IEEE 802.1D 1998 specification).</p> <p>The remaining statements are explained separately.</p>
<b>Default</b>	STP is disabled; by default, RSTP is enabled on all Ethernet switching ports.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring BPDU Protection on STP Interfaces to Prevent STP Miscalculations on page 1495</a></li> <li>• <a href="#">Configuring STP on page 1556</a></li> <li>• <a href="#">Overview of Spanning-Tree Protocols on page 1409</a></li> <li>• <a href="#">show spanning-tree bridge on page 1736</a></li> <li>• <a href="#">show spanning-tree interface on page 1741</a></li> </ul>



## traceoptions (Ethernet Switching Options)

**Syntax** `traceoptions {  
     file filename <files number> <no-stamp> <replace> <size size> <world-readable |  
     no-world-readable>;  
     flag flag <disable>;  
}`

**Hierarchy Level** [edit [ethernet-switching-options](#)]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.



**NOTE:** The `traceoptions` statement is not supported on the QFX3000 QFabric system.

**Description** Define global tracing operations for access security features on Ethernet switches.

**Default** The `traceoptions` feature is disabled by default.

**Options** **disable**—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as **all**.

**file *filename***—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory `/var/log`.

**files *number***—(Optional) Maximum number of trace files. When a trace file named **trace-file** reaches its maximum size, it is renamed **trace-file.0**, then **trace-file.1**, and so on, until the maximum number of trace files is reached ( **xk** to specify KB, **xm** to specify MB, or **xg** to specify gigabytes), at which point the oldest trace file is overwritten. If you specify a maximum number of files, you also must specify a maximum file size with the **size** option.

**Range:** 2 through 1000

**Default:** 3 files

**flag *flag***—Tracing operation to perform. To specify more than one tracing operation, include multiple flag statements. You can include the following flags:

- **access-security**—Trace access security events.
- **all**—All tracing operations.
- **analyzer**—Trace analyzer events.
- **config-internal**—Trace internal configuration operations.
- **filter**—Trace filter transaction events.
- **forwarding-database**—Trace forwarding database events.



- **general**—Trace general events.
- **interface**—Trace interface events.
- **krt**—Trace communications over routing sockets.
- **lib**—Trace library calls.
- **nexthop**—Trace next-hop events.
- **normal**—Trace normal events.
- **parse**—Trace reading of the configuration.
- **regex-parse**—Trace regular-expression parsing operations.
- **rtg**—Trace redundant trunk group events.
- **state**—Trace state transitions.
- **stp**—Trace spanning-tree events.
- **task**—Trace Ethernet-switching task processing.
- **timer**—Trace Ethernet-switching timer processing.
- **unknown-unicast-forwarding**—Trace unknown unicast forwarding events.
- **vlan**—Trace VLAN events.

**no-stamp**—(Optional) Do not timestamp the trace file.

**Default:** If you omit this option, timestamp information is placed at the beginning of each line of the tracing output.

**no-world-readable**—(Optional) Restrict file access to the user who created the file.

**replace**—(Optional) Replace an existing trace file if there is one rather than appending to it.

**Default:** If you do not include this option, tracing output is appended to an existing trace file.

**size size** —(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes. When a trace file named **trace-file** reaches its maximum size, it is renamed **trace-file.0**, then **trace-file.1**, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten. If you specify a maximum number of files, you also must specify a maximum file size with the **files** option.

**Syntax:** **xk** to specify KB, **xm** to specify MB, or **xg** to specify gigabytes

**Range:** 10 KB through 1 gigabyte

**Default:** 128 KB

**world-readable**—(Optional) Enable unrestricted file access.

<b>Required Privilege</b>	routing—To view this statement in the configuration.
<b>Level</b>	routing-control—To add this statement to the configuration.




- Related Documentation**
- [Overview of Spanning-Tree Protocols on page 1409](#)
  - [Understanding Bridging on page 1381](#)



## traceoptions (STP)

---

Syntax	<pre>traceoptions {   file <i>name</i> &lt;replace&gt; &lt;size <i>size</i>&gt; &lt;files <i>number</i>&gt; &lt;no-stamp&gt;     &lt;(world-readable   no-world-readable)&gt;;   flag <i>flag</i> &lt;flag-modifier&gt; &lt;disable&gt;; }</pre>
Hierarchy Level	[edit protocols <a href="#">mstp</a> ], [edit protocols <a href="#">rstp</a> ], [edit protocols <a href="#">stp</a> ], [edit protocols <a href="#">vstp</a> <a href="#">vlan</a> <i>vlan-id</i> ]
Release Information	Statement introduced in Junos OS Release 11.1 for the QFX Series.
	<div> <b>NOTE:</b> traceoptions is not support on QFabric systems.</div>
Description	Set STP protocol-level tracing options.
Default	Traceoptions is disabled.
Options	<p><b>disable</b>—(Optional) Disable the tracing operation. One use of this option is to disable a single operation when you have defined a broad group of tracing operations, such as <b>all</b>.</p> <p><b>file <i>name</i></b> —Name of the file to receive the output of the tracing operation. Enclose the name in quotation marks. We recommend that you place STP tracing output in the file <code>/var/log/stp-log</code>.</p> <p><b>files <i>number</i></b> —(Optional) Maximum number of trace files. When a trace file named <b>trace-file</b> reaches its maximum size, it is renamed <b>trace-file.0</b>, then <b>trace-file.1</b>, and so on, until the maximum number of trace files is reached. Then, the oldest trace file is overwritten.</p> <p>If you specify a maximum number of files, you must also specify a maximum file size with the size option.</p> <p><b>Range:</b> 2 through 1000 files</p> <p><b>Default:</b> 1 trace file only</p> <p><b>flag</b>—Tracing operation to perform. To specify more than one tracing operation, include multiple <b>flag</b> statements. These are the STP-specific tracing options:</p> <ul style="list-style-type: none"><li>• <b>all</b>—Trace all operations.</li><li>• <b>all-failures</b>—Trace all failure conditions.</li><li>• <b>bpdu</b>—Trace BPDU reception and transmission.</li></ul>



- **bridge-detection-state-machine**—Trace the bridge detection state machine.
- **events**—Trace events of the protocol state machine.
- **port-information-state-machine**—Trace the port information state machine.
- **port-migration-state-machine**—Trace the port migration state machine.
- **port-receive-state-machine**—Trace the port receive state machine.
- **port-role-select-state-machine**—Trace the port role selection state machine.
- **port-role-transit-state-machine**—Trace the port role transit state machine.
- **port-transmit-state-machine**—Trace the port transmit state machine.
- **port-state-transit-state-machine**—Trace the port state transit state machine.
- **ppmd**—Trace the state and events for the ppm process.
- **state-machine-variables**—Trace when the state machine variables change.
- **timers**—Trace protocol timers.
- **topology-change-state-machine**—Trace the topology change state machine.

The following are the global tracing options:

- **all**—All tracing operations.
- **config-internal**—Trace configuration internals.
- **general**—Trace general events.
- **normal**—All normal events.

**Default:** If you do not specify this option, only unusual or abnormal operations are traced.



- **parse**—Trace configuration parsing.
- **policy**—Trace policy operations and actions.
- **regex-parse**—Trace regular-expression parsing.
- **route**—Trace routing table changes.
- **state**—Trace state transitions.
- **task**—Trace protocol task processing.
- **timer**—Trace protocol task timer processing.

**no-stamp**—(Optional) Do not place timestamp information at the beginning of each line in the trace file.

**Default:** If you omit this option, timestamp information is placed at the beginning of each line of the tracing output.

**no-world-readable**—(Optional) Prevent any user from reading the log file.

**replace**—(Optional) Replace an existing trace file if there is one.

**Default:** If you do not include this option, tracing output is appended to an existing trace file.

**size** *size*—(Optional) Maximum size of each trace file, in kilobytes (KB) or megabytes (MB). When a trace file named **trace-file** reaches this size, it is renamed **trace-file.O**. When the **trace-file** again reaches its maximum size, **trace-file.O** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.O**. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

If you specify a maximum file size, you must also specify a maximum number of trace files with the **files** option.

**Syntax:** **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

**Range:** 10 KB through the maximum file size supported on your system

**Default:** 1 MB

**world-readable**—(Optional) Allow any user to read the log file.

<b>Required Privilege</b>	routing—To view this statement in the configuration.
<b>Level</b>	routing-control—To add this statement to the configuration.



- Related Documentation**
- [Example: Configuring Network Regions for VLANs with MSTP on page 1441](#)
  - [Example: Configuring Faster Convergence and Improving Network Stability with RSTP on page 1428](#)
  - [Understanding RSTP on page 1411](#)
  - [Understanding MSTP on page 1410](#)
  - [Overview of Spanning-Tree Protocols on page 1409](#)
  - [Understanding VSTP on page 1412](#)
  - [show spanning-tree bridge on page 1736](#)
  - [show spanning-tree interface on page 1741](#)

## unknown-unicast-forwarding

**Syntax** `unknown-unicast-forwarding {  
    vlan (all | vlan-name){  
        interface interface-name;  
    }  
}`

**Hierarchy Level** [edit [ethernet-switching-options](#)]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure the switch to forward all unknown unicast packets in a VLAN or on all VLANs to a particular interface.



**NOTE:** Before you can configure unknown unicast forwarding within a VLAN, you must first configure that VLAN.

The remaining statements are explained separately.

**Default** Unknown unicast packets are flooded to all interfaces that belong to the same VLAN.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

- Related Documentation**
- [Configuring Unknown Unicast Forwarding on page 4194](#)
  - [Understanding Unknown Unicast Forwarding on page 4126](#)
  - [show ethernet-switching table on page 1711](#)
  - [show vlans on page 1752](#)



## vlan (Ethernet)

---

<b>Syntax</b>	<code>vlan {     members [ (all   names   vlan-ids) ]; }</code>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> ge-chassis/slot/port <a href="#">unit</a> logical-unit-number <a href="#">ethernet-switching</a> ], [edit <a href="#">interfaces</a> xe-chassis/slot/port <a href="#">unit</a> logical-unit-number <a href="#">ethernet-switching</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>For Gigabit Ethernet and aggregated Ethernet interfaces, assign an 802.1Q VLAN tag ID to a logical interface.</p> <p>The statements are explained separately.</p>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Setting Up Bridging with Multiple VLANs on page 1476</a></li><li>• <a href="#">Junos OS Network Interfaces Configuration Guide</a></li></ul>



## vlan (STP)

```
Syntax  vlan (vlan-id | vlan-name) {
        bridge-priority priority;
        forward-delay seconds;
        hello-time seconds;
        interface (all | interface-name) {
            bpdu-timeout-action {
                block;
                alarm;
            }
            cost cost;
            disable;
            edge;
            mode mode;
            no-root-port;
            priority priority;
        }
        max-age seconds;
        traceoptions {
            file filename <files number > <size size> <no-stamp | world-readable |
            no-world-readable>;
            flag flag;
        }
    }
```

**Hierarchy Level** [edit protocols **mstp** **msti** *msti-id*],  
[edit protocols **vstp**]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure the VLANs for a Multiple Spanning Tree Instance (MSTI).

The remaining statements are explained separately.



**TIP:** To display a list of all configured VLANs on the system, including VLANs that are configured but not committed, type ? after vlan or vlans in your configuration mode command line. Note that only one VLAN is displayed for a VLAN range.

**Default** Not enabled.

**Options** *vlan-id*—Numeric VLAN identifier.

*vlan-name*—Name of the VLAN.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.



- Related Documentation**
- [Example: Configuring Network Regions for VLANs with MSTP on page 1441](#)
  - [Understanding MSTP on page 1410](#)
  - [Understanding VSTP on page 1412](#)

---

## vlan (Unknown Unicast)

---

**Syntax**     `vlan (all | vlan-name) {  
                  interface interface-name;  
                  }`

**Hierarchy Level**     [\[edit ethernet-switching-options unknown-unicast-forwarding\]](#)

**Release Information**     Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**     Specify a VLAN from which unknown unicast packets will be forwarded, or specify that the packets should be forwarded from *all* VLANs. Unknown unicast packets are forwarded from a VLAN to a specific trunk interface.

The remaining statement is explained separately.



**TIP:** To display a list of all configured VLANs on the system, including VLANs that are configured but not committed, type ? after `vlan` or `vlangs` in your configuration mode command line. Note that only one VLAN is displayed for a VLAN range.

---

**Options**     `all`—All VLANs.

***vlan-name***—Name of a VLAN.

**Required Privilege Level**     `routing`—To view this statement in the configuration.  
                                      `routing-control`—To add this statement to the configuration.

- Related Documentation**
- [Configuring Unknown Unicast Forwarding on page 4194](#)
  - [Verifying That Unknown Unicast Packets Are Forwarded to a Trunk Interface on page 4286](#)
  - [Understanding Unknown Unicast Forwarding on page 4126](#)
  - [show ethernet-switching table on page 1711](#)
  - [show vlans on page 1752](#)



## vlan-id (VLANs)

<b>Syntax</b>	<code>vlan-id <i>number</i>;</code>
<b>Hierarchy Level</b>	[edit <b>vlan</b> <i>vlan-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure an 802.1Q tag to apply to all traffic that originates on the VLAN.
<b>Default</b>	If you use the default factory configuration, all traffic originating on the VLAN is untagged and has a VLAN identifier of 1. The number zero is reserved for priority tagging and the number 4093 is also reserved.
<b>Options</b>	<i>number</i> —VLAN tag identifier. <b>Range:</b> 0 through 4093.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Setting Up Bridging with Multiple VLANs on page 1476</a></li> <li>• <a href="#">Understanding Bridging on page 1381</a></li> </ul>

## vlan-range

<b>Syntax</b>	<code>vlan-range <i>vlan-id-low-vlan-id-high</i>;</code>
<b>Hierarchy Level</b>	[edit <b>vlan</b> <i>vlan-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure multiple VLANs. Each VLAN is assigned a VLAN ID number from the range.
<b>Default</b>	None.
<b>Options</b>	<i>vlan-id-low-vlan-id-high</i> —Specify the first and last VLAN ID number for the group of VLANs.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring VLANs on page 1553</a></li> <li>• <a href="#">Configuring Routed VLAN Interfaces on page 1551</a></li> <li>• <a href="#">Understanding Bridging on page 1381</a></li> </ul>



## vlan

<b>Syntax</b>	<pre> vlan {   vlan-name {     description text-description;     dot1q-tunneling {       customer-vlans (id   range);     }     filter input filter-name;     filter output filter-name;     interface interface-name {       isolated;       mapping (policy   tag push   native push);       promiscuous;     }     isolation-vlan-id;     l3-interface vlan.logical-interface-number;     mac-limit number;     mac-table-aging-time seconds;     no-local-switching;     no-mac-learning;     primary-vlan vlan-name;     pvlan extend-secondary-vlan-id vlan-id;     vlan-id number;     vlan-range vlan-id-low-vlan-id-high;   } } </pre>
<b>Hierarchy Level</b>	[edit]
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Statements for private VLANs and Q-in-Q tunneling introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Configure VLAN properties on the QFX Series.
<b>Default</b>	If you use the default factory configuration, all switch interfaces become part of the VLAN default.
<b>Options</b>	<p><b>vlan-name</b>—Name of the VLAN. The name can contain letters, numbers, hyphens (-), and periods (.) and can be up to 255 characters long.</p> <p>The remaining statements are described separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring VLANs on page 1553</a></li> <li>• <a href="#">Configuring Q-in-Q Tunneling on page 1562</a></li> <li>• <a href="#">Creating a Series of Tagged VLANs on page 1555</a></li> </ul>



- [Configuring Routed VLAN Interfaces on page 1551](#)
- [Creating a Private VLAN on a Single Switch on page 1560](#)
- [Understanding Bridging on page 1381](#)

## [vlan-tagging](#)

---

<b>Syntax</b>	<code>vlan-tagging;</code>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> ] [edit <a href="#">interfaces</a> <a href="#">interface-range</a> <i>interface-range-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Enable VLAN tagging. The platform receives and forwards single-tag frames with 802.1Q VLAN tags.
<b>Default</b>	VLAN tagging is disabled by default.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">vlan-id on page 2118</a></li><li>• <a href="#">Configuring a Layer 3 Logical Interface on page 2033</a></li></ul>



## vstp

---

```
Syntax  vstp {
        disable;
        bpdu-block-on-edge;
        force-version stp;
        vlan (vlan-id | vlan-name) {
            bridge-priority priority;
            forward-delay seconds;
            hello-time seconds;
            interface (all | interface-name) {
                disable;
                bpdu-timeout-action {
                    alarm;
                    block;
                }
                cost cost;
                edge;
                mode mode;
                no-root-port;
                priority priority;
            }
            max-age seconds;
            traceoptions {
                file name <replace> <size size> <files number> <no-stamp>
                  <world-readable | no-world-readable>;
                flag flag <flag-modifier> <disable>;
            }
        }
    }
```

**Hierarchy Level** [edit protocols]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure VLAN Spanning Tree Protocol (VSTP). VSTP is used to prevent loops in Layer 2 networks on a per-VLAN basis.

The remaining statements are explained separately.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Understanding VSTP on page 1412](#)
- [show spanning-tree bridge on page 1736](#)
- [show spanning-tree interface on page 1741](#)



## Private VLAN Configuration Statements

### extend-secondary-vlan-id

<b>Syntax</b>	<code>extend-secondary-vlan-id <i>number</i>;</code>
<b>Hierarchy Level</b>	[edit <b>vlan</b> <i>vlan-name</i> <b>pvlan</b> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Configure traffic that egresses from a secondary VLAN trunk port to retain its secondary VLAN tag instead of getting the tag of the primary VLAN that the secondary port is a member of.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Understanding Secondary VLAN Trunk Ports and Promiscuous Access Ports on PVLANS on page 1399</a></li> <li>• <a href="#">Example: Configuring PVLANS with Secondary VLAN Trunk Ports and Promiscuous Access Ports on page 1529</a></li> </ul>

### isolated

<b>Syntax</b>	<code>isolated;</code>
<b>Hierarchy Level</b>	[edit <b>vlan</b> <i>vlan-name</i> interface <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure an access or trunk port to be isolated. You configure a trunk port to be isolated so that it can be a secondary VLAN trunk port—that is, it can carry secondary VLAN traffic.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Creating a Private VLAN on a Single Switch on page 1560</a></li> <li>• <a href="#">Creating a Private VLAN Spanning Multiple Switches on page 1561</a></li> <li>• <a href="#">Understanding Secondary VLAN Trunk Ports and Promiscuous Access Ports on PVLANS on page 1399</a></li> <li>• <a href="#">Example: Configuring PVLANS with Secondary VLAN Trunk Ports and Promiscuous Access Ports on page 1529</a></li> </ul>




## isolation-vlan-id

---

<b>Syntax</b>	<code>isolation-vlan-id <i>number</i>;</code>
<b>Hierarchy Level</b>	[edit <b>vlan</b> <i>vlan-name</i> <b>pvlan</b> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure an interswitch isolated VLAN within a private VLAN that spans multiple switches.
<b>Options</b>	<i>number</i> —VLAN tag identifier. <b>Range:</b> 0 through 4093
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Creating a Private VLAN on a Single Switch on page 1560</a></li><li>• <a href="#">Creating a Private VLAN Spanning Multiple Switches on page 1561</a></li></ul>

## primary-vlan

---

<b>Syntax</b>	<code>primary-vlan <i>vlan-name</i>;</code>
<b>Hierarchy Level</b>	[edit <b>vlan</b> <i>vlan-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Configure the primary VLAN for this community VLAN. The primary VLAN must be tagged, and the community VLAN must be untagged.</p> <p>If you want to create a community VLAN, you must configure the primary VLAN to be private using the <b>pvlan</b> statement.</p>
	<div><div><p><b>TIP:</b> To display a list of all configured VLANs on the system, including VLANs that are configured but not committed, type ? after vlan or vlans in your configuration mode command line. Note that only one VLAN is displayed for a VLAN range.</p></div></div>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Creating a Private VLAN on a Single Switch on page 1560</a></li><li>• <a href="#">Creating a Private VLAN Spanning Multiple Switches on page 1561</a></li></ul>



## pvlan

---

<b>Syntax</b>	private-vlan;
<b>Hierarchy Level</b>	[edit <a href="#">vlans</a> <i>vlan-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Specify that the VLAN is private and access ports in the VLAN do not forward packets to each other. You use this statement with primary VLANs and isolated secondary VLANs.
<b>Options</b>	none
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Creating a Private VLAN on a Single Switch on page 1560</a></li> <li>• <a href="#">Creating a Private VLAN Spanning Multiple Switches on page 1561</a></li> </ul>

## promiscuous

---

<b>Syntax</b>	promiscuous;
<b>Hierarchy Level</b>	[edit <a href="#">vlans</a> <i>vlan-name</i> <a href="#">interface</a> <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure an access or trunk port to be promiscuous.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Creating a Private VLAN on a Single Switch on page 1560</a></li> <li>• <a href="#">Creating a Private VLAN Spanning Multiple Switches on page 1561</a></li> </ul>



## pvlan-trunk

---

<b>Syntax</b>	pvlan-trunk;
<b>Hierarchy Level</b>	[edit <a href="#">vlans</a> <i>vlan-name</i> <a href="#">interface</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure an interface to be a private VLAN trunk port.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Creating a Private VLAN on a Single Switch on page 1560</a></li><li>• <a href="#">Creating a Private VLAN Spanning Multiple Switches on page 1561</a></li></ul>



## vlan

<b>Syntax</b>	<pre> vlan {   vlan-name {     description text-description;     dot1q-tunneling {       customer-vlans (id   range);     }     filter input filter-name;     filter output filter-name;     interface interface-name {       isolated;       mapping (policy   tag push   native push);       promiscuous;     }     isolation-vlan-id;     l3-interface vlan.logical-interface-number;     mac-limit number;     mac-table-aging-time seconds;     no-local-switching;     no-mac-learning;     primary-vlan vlan-name;     pvlan extend-secondary-vlan-id vlan-id;     vlan-id number;     vlan-range vlan-id-low-vlan-id-high;   } } </pre>
<b>Hierarchy Level</b>	[edit]
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Statements for private VLANs and Q-in-Q tunneling introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Configure VLAN properties on the QFX Series.
<b>Default</b>	If you use the default factory configuration, all switch interfaces become part of the VLAN default.
<b>Options</b>	<p><b>vlan-name</b>—Name of the VLAN. The name can contain letters, numbers, hyphens (-), and periods (.) and can be up to 255 characters long.</p> <p>The remaining statements are described separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring VLANs on page 1553</a></li> <li>• <a href="#">Configuring Q-in-Q Tunneling on page 1562</a></li> <li>• <a href="#">Creating a Series of Tagged VLANs on page 1555</a></li> </ul>



- [Configuring Routed VLAN Interfaces on page 1551](#)
- [Creating a Private VLAN on a Single Switch on page 1560](#)
- [Understanding Bridging on page 1381](#)

## Q-in-Q Tunneling Configuration Statements

---

### customer-vlans

---

<b>Syntax</b>	<code>customer-vlans (<i>id</i>   <i>native</i>   <i>range</i>);</code>
<b>Hierarchy Level</b>	[edit vlans <i>vlan-name</i> <a href="#">dot1q-tunneling</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.3 for EX Series switches. Option <b>native</b> introduced in Junos OS Release 9.6 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Limit the set of accepted customer VLAN tags to a range or to discrete values when mapping customer VLANs to service VLANs.
<b>Options</b>	<p><b><i>id</i></b>—Numeric identifier for a VLAN.</p> <p><b><i>native</i></b>—Accepts untagged and priority-tagged packets from access interfaces and assigns the configured S-VLAN to the packet.</p> <p><b><i>range</i></b>—Range of numeric identifiers for VLANs. On the QFX series, you can include as many as eight separate customer VLAN ranges for a given service VLAN. Do not configure more than this number of ranges.</p>
<b>Required Privilege Level</b>	<p><b>system</b>—To view this statement in the configuration.</p> <p><b>system-control</b>—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">dot1q-tunneling (Ethernet Switching) on page 1663</a></li><li>• ether-type</li><li>• Example: Setting Up Q-in-Q Tunneling on EX Series Switches</li><li>• Configuring Q-in-Q Tunneling (CLI Procedure)</li><li>• Understanding Q-in-Q Tunneling on EX Series Switches</li><li>• <a href="#">Configuring Q-in-Q Tunneling on page 1562</a></li><li>• <a href="#">Example: Setting Up Q-in-Q Tunneling on page 1541</a></li><li>• <a href="#">dot1q-tunneling (Ethernet Switching) on page 1663</a></li><li>• <a href="#">ether-type on page 1665</a></li></ul>



---

## dot1q-tunneling (Ethernet Switching)

---

<b>Syntax</b>	<pre>dot1q-tunneling {     ether-type (0x8100   0x88a8   0x9100); }</pre>
<b>Hierarchy Level</b>	[edit ethernet-switching-options]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.3 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Set a global value for the EtherType for Q-in-Q tunneling.  The remaining statement is explained separately.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">dot1q-tunneling on page 1664</a></li><li>• Example: Setting Up Q-in-Q Tunneling on EX Series Switches</li><li>• Configuring Q-in-Q Tunneling (CLI Procedure)</li><li>• <a href="#">Configuring Q-in-Q Tunneling on page 1562</a></li><li>• Example: Setting Up Q-in-Q Tunneling on page 1541</li><li>• <a href="#">dot1q-tunneling on page 1664</a></li></ul>



## dot1q-tunneling (VLANs)

<b>Syntax</b>	<pre>dot1q-tunneling {     customer-vlans (id   native   range);     layer2-protocol-tunneling all   protocol-name {         drop-threshold number;         shutdown-threshold number;     } }</pre>
<b>Hierarchy Level</b>	[edit vlans <i>vlan-name</i> ]
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>Option <b>native</b> introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Options <b>layer2-protocol-tunneling</b>, <b>drop-threshold</b>, and <b>shutdown-threshold</b> introduced in Junos OS Release 10.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Enable Q-in-Q tunneling on the specified VLAN.



### NOTE:

- The VLAN on which you enable Q-in-Q tunneling must be a tagged VLAN.
- You cannot configure 802.1X user authentication on interfaces that have been enabled for Q-in-Q tunneling.

The remaining statements are explained separately.

<b>Required Privilege</b>	system—To view this statement in the configuration.
<b>Level</b>	system-control—To add this statement to the configuration.

<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Setting Up Q-in-Q Tunneling on EX Series Switches</a></li> <li>• <a href="#">Configuring Q-in-Q Tunneling (CLI Procedure)</a></li> <li>• <a href="#">Configuring Q-in-Q Tunneling on page 1562</a></li> <li>• <a href="#">Example: Setting Up Q-in-Q Tunneling on page 1541</a></li> <li>• <a href="#">Configuring Layer 2 Protocol Tunneling on page 1563</a></li> <li>• <a href="#">dot1q-tunneling (Ethernet Switching) on page 1663</a></li> </ul>
------------------------------	--



---

## ether-type

---

<b>Syntax</b>	ether-type (0x8100   0x88a8   0x9100)
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options dot1q-tunneling</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure a global value for the tag protocol identifier (EtherType) of the service VLAN tags (outer tags) in Q-in-Q tunneling. Only one EtherType value is supported at a time.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Q-in-Q Tunneling on page 1562</a></li><li>• <a href="#">Example: Setting Up Q-in-Q Tunneling on page 1541</a></li></ul>



## layer2-protocol-tunneling

**Syntax** `layer2-protocol-tunneling all | protocol-name {  
     drop-threshold number;  
     shutdown-threshold number;  
 }`

**Hierarchy Level** `[edit vlans vlan-name dot1q-tunneling]`

**Release Information** Statement introduced in Junos OS Release 10.0 for EX Series switches.  
 Statement introduced in Junos OS Release 12.1 for the QFX Series.

**Description** Enable Layer 2 protocol tunneling (L2PT) on the VLAN.  
 The remaining statements are explained separately.

**Default** L2PT is not enabled.

**Options** `all`—Enable all supported Layer 2 protocols.

*protocol-name*—Name of the Layer 2 protocol. Values are:

- `802.1x`—IEEE 802.1X authentication
- `802.3ah`—IEEE 802.3ah Operation, Administration, and Maintenance (OAM) link fault management (LFM)



**NOTE:** If you enable L2PT for untagged OAM LFM packets, do not configure LFM on the corresponding access interface.

- `cdp`—Cisco Discovery Protocol
- `e-lmi`—Ethernet local management interface
- `gvrp`—GARP VLAN Registration Protocol
- `lACP`—Link Aggregation Control Protocol



**NOTE:** If you enable L2PT for untagged LACP packets, do not configure LACP on the corresponding access interface.

- `lldp`—Link Layer Discovery Protocol
- `mmp`—Multiple MAC Registration Protocol
- `mvrp`—Multiple VLAN Registration Protocol
- `stp`—Spanning Tree Protocol, Rapid Spanning Tree Protocol, and Multiple Spanning Tree Protocol



- **udld**—Unidirectional Link Detection (UDLD)
- **vstp**—VLAN Spanning Tree Protocol
- **vtp**—VLAN Trunking Protocol

**Required Privilege Level**    system—To view this statement in the configuration.  
   system-control—To add this statement to the configuration.

**Related Documentation**

- [show ethernet-switching layer2-protocol-tunneling interface on page 1695](#)
- [show ethernet-switching layer2-protocol-tunneling statistics on page 1697](#)
- [show ethernet-switching layer2-protocol-tunneling vlan on page 1700](#)
- Example: Configuring Layer 2 Protocol Tunneling on EX Series Switches
- Configuring Layer 2 Protocol Tunneling on EX Series Switches (CLI Procedure)
- [Configuring Layer 2 Protocol Tunneling on page 1563](#)



## mapping

---

<b>Syntax</b>	mapping (native (push   swap)   tag (push   swap));
<b>Hierarchy Level</b>	[edit <b>vlangs</b> <i>vlan-name</i> <b>interface</b> <i>interface-name</i> egress], [edit <b>vlangs</b> <i>vlan-name</i> <b>interface</b> <i>interface-name</i> ingress], [edit <b>vlangs</b> <i>vlan-name</i> <b>interface</b> <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Map a specific C-VLAN to an S-VLAN. By default, the received incoming or outgoing tag is replaced with the new tag.
<b>Options</b>	<p><b>native</b>—Map untagged and priority-tagged packets to an S-VLAN.</p> <p><b>push</b>—Retain the incoming tag (as an inner tag) and adds an additional VLAN tag. When you use this option, the TPID of the outer tag is set as follows:</p> <ul style="list-style-type: none"><li>• If Q-in-Q tunneling is not enabled in the VLAN, then the Ethertype for outer tag is set to 0x8100.</li><li>• If Q-in-Q tunneling is enabled in the VLAN and a packet is egressing from a trunk port, then the Ethertype is set to 0x88a8 (or as configured by an <b>ether-type</b> statement).</li></ul> <p><b>swap</b>—Replaces the incoming VLAN tag with the VLAN ID tag of the S-VLAN. Using this option is also referred to as VLAN ID translation. When you use this option on a trunk port for which Q-in-Q tunneling is enabled, use the <b>ether-type</b> statement to set the Ethertype.</p> <p><b>tag</b>—Original VLAN tag that will be replaced (with <b>swap</b>) or that will become an inner tag (with <b>push</b>).</p>
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Q-in-Q Tunneling on page 1562</a></li><li>• <a href="#">Example: Setting Up Q-in-Q Tunneling on page 1541</a></li></ul>



## mapping-range

<b>Syntax</b>	<code>mapping-range C-VLAN-range (push   swap) &lt;vlan-id-start S-VLAN-ID&gt;;</code>
<b>Hierarchy Level</b>	[edit vlans <i>vlan-name</i> interface (VLANs) <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure an access interface to map a range of C-VLANs to a range of S-VLANs. Use this statement instead of using multiple <b>set vlans <i>VLAN-name</i> interface <i>interface-name</i> mapping (push   swap)</b> statements to configure Q-in-Q tunneling or VLAN translation on a per-VLAN basis. This statement is particularly useful if you have used the <b>vlan-range</b> statement to create multiple VLANs.
<b>Options</b>	<p><b>push</b>—Retain the incoming tag and adds an additional VLAN tag (Q-in-Q tunneling).</p> <p><b>swap</b>—Swap the incoming VLAN tag with the VLAN ID tag of the S-VLAN (VLAN translation).</p> <p><b>vlan-ID-start <i>S-VLAN-ID</i></b>—(Optional) Set the start of the S-VLAN range that the C-VLANs will be mapped to. If you omit this option, mapping begins with the first ID in the range of S-VLAN IDs (which you configure using the <b>set vlans <i>vlan-range</i></b> statement).</p>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Q-in-Q Tunneling on page 1562</a></li> <li>• <a href="#">Example: Setting Up Q-in-Q Tunneling on page 1541</a></li> <li>• <a href="#">vlan-range on page 1653</a></li> </ul>

## no-local-switching

<b>Syntax</b>	<code>no-local-switching;</code>
<b>Hierarchy Level</b>	[edit vlans <i>vlan-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Specify that access ports in this VLAN domain do not forward packets to one another. You use this statement with primary VLANs and isolated secondary VLANs.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Creating a Private VLAN on a Single Switch on page 1560</a></li> <li>• <a href="#">Creating a Private VLAN Spanning Multiple Switches on page 1561</a></li> </ul>



## shutdown-threshold

---

<b>Syntax</b>	<code>shutdown-threshold <i>number</i>;</code>
<b>Hierarchy Level</b>	<code>[edit vlans <i>vlan-name</i> dot1q-tunneling layer2-protocol-tunneling (all   <i>protocol-name</i>)]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 10.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Specify the maximum number of Layer 2 PDUs of the specified protocol that can be received per second on the interfaces in a specified VLAN before the interface is disabled. Once an interface is disabled, you must explicitly reenable it using the <b>clear ethernet-switching layer2-protocol-tunneling error</b> command. Otherwise, the interface remains disabled.</p> <p>The shutdown threshold value must be greater than or equal to the drop threshold value. If the shutdown threshold value is less than the drop threshold value, the drop threshold value has no effect.</p> <p>You can specify a shutdown threshold value without specifying a drop threshold value.</p>
<b>Default</b>	No shutdown threshold is specified.
<b>Options</b>	<p><b><i>number</i></b>—Maximum number of Layer 2 PDUs of the specified protocol that can be received per second on the interfaces in a specified VLAN before the interface is disabled.</p> <p><b>Range:</b> 1 through 1000</p>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">drop-threshold on page 1593</a></li><li>• <a href="#">Example: Configuring Layer 2 Protocol Tunneling on EX Series Switches</a></li><li>• <a href="#">Configuring Layer 2 Protocol Tunneling on EX Series Switches (CLI Procedure)</a></li><li>• <a href="#">Configuring Layer 2 Protocol Tunneling on page 1563</a></li></ul>



## vlan-id-start

---

<b>Syntax</b>	<code>vlan-id-start S-VLAN-ID;</code>
<b>Hierarchy Level</b>	[edit vlans <i>vlan-name</i> interface (VLANs) <i>interface-name</i> mapping-range <i>C-VLAN-range</i> (push   swap)]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure an access interface to map a range of C-VLANs to a range of S-VLANs. Use this statement instead of using multiple <b>set vlans <i>VLAN-name</i> interface <i>interface-name</i> mapping (push   swap)</b> statements to configure Q-in-Q tunneling or VLAN translation on a per-VLAN basis. This statement sets the start of the S-VLAN range that the C-VLANs are mapped to. If you omit this option, mapping begins with the first ID in the range of S-VLAN IDs (which you configure using the <b>set vlans <i>vlan-range</i></b> statement).
<b>Options</b>	None
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Q-in-Q Tunneling on page 1562</a></li> <li>• <a href="#">Example: Setting Up Q-in-Q Tunneling on page 1541</a></li> </ul>



## vlan

<b>Syntax</b>	<pre> vlan {   vlan-name {     description text-description;     dot1q-tunneling {       customer-vlans (id   range);     }     filter input filter-name;     filter output filter-name;     interface interface-name {       isolated;       mapping (policy   tag push   native push);       promiscuous;     }     isolation-vlan-id;     l3-interface vlan.logical-interface-number;     mac-limit number;     mac-table-aging-time seconds;     no-local-switching;     no-mac-learning;     primary-vlan vlan-name;     pvlan extend-secondary-vlan-id vlan-id;     vlan-id number;     vlan-range vlan-id-low-vlan-id-high;   } } </pre>
<b>Hierarchy Level</b>	[edit]
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Statements for private VLANs and Q-in-Q tunneling introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Configure VLAN properties on the QFX Series.
<b>Default</b>	If you use the default factory configuration, all switch interfaces become part of the VLAN default.
<b>Options</b>	<p><b>vlan-name</b>—Name of the VLAN. The name can contain letters, numbers, hyphens (-), and periods (.) and can be up to 255 characters long.</p> <p>The remaining statements are described separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring VLANs on page 1553</a></li> <li>• <a href="#">Configuring Q-in-Q Tunneling on page 1562</a></li> <li>• <a href="#">Creating a Series of Tagged VLANs on page 1555</a></li> </ul>



- [Configuring Routed VLAN Interfaces on page 1551](#)
- [Creating a Private VLAN on a Single Switch on page 1560](#)
- [Understanding Bridging on page 1381](#)







## CHAPTER 17

# Administration

- [Routine Monitoring on page 1675](#)
- [Monitoring Commands on page 1684](#)

## Routine Monitoring

---

- [Verifying That MAC Notification Is Working Properly on page 1675](#)
- [Verifying That a Series of Tagged VLANs Has Been Created on page 1675](#)
- [Verifying That Q-in-Q Tunneling Is Working on page 1677](#)
- [Verifying That a Private VLAN Is Working on page 1678](#)
- [Verifying That Proxy ARP Is Working Correctly on page 1683](#)

### Verifying That MAC Notification Is Working Properly

**Purpose** Verify that MAC notification is enabled or disabled, and that the MAC notification interval is set to the specified value.

**Action** To verify that MAC notification is enabled or disabled and also to verify the MAC notification interval setting.

```
user@switch> show ethernet-switching mac-notification
Notification Status: Enabled
Notification Interval: 30
```

**Meaning** The output in the **Notification Status** field shows that MAC notification is enabled. The output in the **Notification Status** field would display **Disabled** if MAC notification was disabled.

The **Notification Interval** field output shows that the MAC notification interval is set to 30 seconds.

**Related Documentation** • [Configuring MAC Notification on page 1547](#)

### Verifying That a Series of Tagged VLANs Has Been Created

**Purpose** Verify that a series of tagged VLANs has been created on the switch.



- Action** 1. Display the VLANs in the ascending order of their VLAN ID:

```
user@switch> show vlans sort-by tag
```

Name	Tag	Interfaces
__employee_120__	120	xe-0/0/22.0*
__employee_121__	121	xe-0/0/22.0*
__employee_122__	122	xe-0/0/22.0*
__employee_123__	123	xe-0/0/22.0*
__employee_124__	124	xe-0/0/22.0*
__employee_125__	125	xe-0/0/22.0*
__employee_126__	126	xe-0/0/22.0*
__employee_127__	127	xe-0/0/22.0*
__employee_128__	128	xe-0/0/22.0*
__employee_129__	129	xe-0/0/22.0*
__employee_130__	130	xe-0/0/22.0*

2. Display the VLANs by the alphabetical order of the VLAN name:

```
user@switch> show vlans sort-by name
```

Name	Tag	Interfaces
__employee_120__	120	xe-0/0/22.0*
__employee_121__	121	xe-0/0/22.0*
__employee_122__	122	xe-0/0/22.0*
__employee_123__	123	xe-0/0/22.0*
__employee_124__	124	xe-0/0/22.0*
__employee_125__	125	xe-0/0/22.0*
__employee_126__	126	xe-0/0/22.0*
__employee_127__	127	xe-0/0/22.0*
__employee_128__	128	xe-0/0/22.0*
__employee_129__	129	xe-0/0/22.0*
__employee_130__	130	xe-0/0/22.0*

3. Display the VLANs by specifying the VLAN range name (here, the VLAN range name is **employee**):

```
user@switch> show vlans employee
```



Name	Tag	Interfaces
__employee_120__	120	xe-0/0/22.0*
__employee_121__	121	xe-0/0/22.0*
__employee_122__	122	xe-0/0/22.0*
__employee_123__	123	xe-0/0/22.0*
__employee_124__	124	xe-0/0/22.0*
__employee_125__	125	xe-0/0/22.0*
__employee_126__	126	xe-0/0/22.0*
__employee_127__	127	xe-0/0/22.0*
__employee_128__	128	xe-0/0/22.0*
__employee_129__	129	xe-0/0/22.0*
__employee_130__	130	xe-0/0/22.0*

**Meaning** The sample output shows the VLANs configured on the switch. The series of tagged VLANs is displayed: **\_\_employee\_120\_\_** through **\_\_employee\_130\_\_**. Each of the tagged VLANs is configured on the trunk interface **xe-0/0/22.0**. The asterisk (\*) next to the interface name indicates that the interface is **UP**.

When a series of VLANs is created using the **vlan-range** statement, the VLAN names are preceded and followed by a double underscore.

**Related Documentation**

- [Creating a Series of Tagged VLANs on page 1555](#)

## Verifying That Q-in-Q Tunneling Is Working

**Purpose** After creating a Q-in-Q VLAN, verify that it is set up properly.

**Action** 1. Use the **show configuration vlans** command to determine if you successfully created the primary and secondary VLAN configurations:

```
user@switch> show configuration vlans
svlan {
  vlan-id 300;
  dot1q-tunneling {
    customer-vlans [ 101-200 ];
  }
}
```

2. Use the **show vlans** command to view VLAN information and link status:

```
user@switch> show vlans s-vlan-name extensive
VLAN: svlan, Created at: Thu Oct 23 16:53:20 2008
802.1Q Tag: 300, Internal index: 2, Admin State: Enabled, Origin: Static
Dot1q Tunneling Status: Enabled
```



```
Customer VLAN ranges:
                        101-200
Protocol: Port Mode
Number of interfaces: Tagged 1 (Active = 0), Untagged 1 (Active = 0)
                    xe-0/0/1, tagged, trunk
                    xe-0/0/2, untagged, access
```

**Meaning** The output confirms that Q-in-Q tunneling is enabled and that the VLAN is tagged, and lists the customer VLANs that are associated with the tagged VLAN.

**Related Documentation**

- Configuring Q-in-Q Tunneling (CLI Procedure)
- Example: Setting Up Q-in-Q Tunneling on EX Series Switches

## Verifying That a Private VLAN Is Working

**Purpose** After creating and configuring private VLANs (PVLANS), verify that they are set up properly.

**Action** 1. To determine whether you successfully created the primary and secondary VLAN configurations:

- For a PVLAN on a single switch, use the **show configuration vlans** command:

```
user@switch> show configuration vlans
community1 {
    interface {
        interface a;
        interface b;
    }
    primary-vlan pvlan;
}
community2 {
    interface {
        interface d;
        interface e;
    }
    primary-vlan pvlan;
}
pvlan {
    vlan-id 1000;
    interface {
        isolated1;
        isolated2;
        trunk1;
        trunk2;
    }
    no-local-switching;
}
```

- For a PVLAN spanning multiple switches, use the **show vlans extensive** command:

```
user@switch> show vlans extensive
VLAN: COM1, Created at: Tue May 11 18:16:05 2010
802.1Q Tag: 100, Internal index: 3, Admin State: Enabled, Origin: Static
Private VLAN Mode: Community, Primary VLAN: primary
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 3 (Active = 3), Untagged 1 (Active = 1)
                    ge-0/0/20.0*, tagged, trunk
```



```

ge-0/0/22.0*, tagged, trunk, pvlan-trunk
ge-0/0/23.0*, tagged, trunk, pvlan-trunk
ge-0/0/7.0*, untagged, access

```

```

VLAN: __pvlan_primary_ge-0/0/0.0__, Created at: Tue May 11 18:16:05 2010
Internal index: 5, Admin State: Enabled, Origin: Static
Private VLAN Mode: Isolated, Primary VLAN: primary
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 3 (Active = 3), Untagged 1 (Active = 1)
    ge-0/0/20.0*, tagged, trunk
    ge-0/0/22.0*, tagged, trunk, pvlan-trunk
    ge-0/0/23.0*, tagged, trunk, pvlan-trunk
    ge-0/0/0.0*, untagged, access

```

```

VLAN: __pvlan_primary_ge-0/0/2.0__, Created at: Tue May 11 18:16:05 2010
Internal index: 6, Admin State: Enabled, Origin: Static
Private VLAN Mode: Isolated, Primary VLAN: primary
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 3 (Active = 3), Untagged 1 (Active = 0)
    ge-0/0/20.0*, tagged, trunk
    ge-0/0/22.0*, tagged, trunk, pvlan-trunk
    ge-0/0/23.0*, tagged, trunk, pvlan-trunk
    ge-0/0/2.0, untagged, access

```

```

VLAN: __pvlan_primary_isiv__, Created at: Tue May 11 18:16:05 2010
802.1Q Tag: 50, Internal index: 7, Admin State: Enabled, Origin: Static
Private VLAN Mode: Inter-switch-isolated, Primary VLAN: primary
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 3 (Active = 3), Untagged 0 (Active = 0)
    ge-0/0/20.0*, tagged, trunk
    ge-0/0/22.0*, tagged, trunk, pvlan-trunk
    ge-0/0/23.0*, tagged, trunk, pvlan-trunk

```

```

VLAN: community2, Created at: Tue May 11 18:16:05 2010
802.1Q Tag: 20, Internal index: 8, Admin State: Enabled, Origin: Static
Private VLAN Mode: Community, Primary VLAN: primary
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 3 (Active = 3), Untagged 2 (Active = 2)
    ge-0/0/20.0*, tagged, trunk
    ge-0/0/22.0*, tagged, trunk, pvlan-trunk
    ge-0/0/23.0*, tagged, trunk, pvlan-trunk
    ge-0/0/1.0*, untagged, access
    ge-1/0/6.0*, untagged, access

```

```

VLAN: primary, Created at: Tue May 11 18:16:05 2010
802.1Q Tag: 10, Internal index: 2, Admin State: Enabled, Origin: Static
Private VLAN Mode: Primary
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 3 (Active = 3), Untagged 5 (Active = 4)
    ge-0/0/20.0*, tagged, trunk
    ge-0/0/22.0*, tagged, trunk, pvlan-trunk
    ge-0/0/23.0*, tagged, trunk, pvlan-trunk
    ge-0/0/0.0*, untagged, access
    ge-0/0/1.0*, untagged, access
    ge-0/0/2.0, untagged, access
    ge-0/0/7.0*, untagged, access
    ge-1/0/6.0*, untagged, access

```



```

Secondary VLANs: Isolated 2, Community 2, Inter-switch-isolated 1
Isolated VLANs :
  __pvlan_primary_ge-0/0/0.0__
  __pvlan_primary_ge-0/0/2.0__
Community VLANs :
  COM1
  community2
Inter-switch-isolated VLAN :
  __pvlan_primary_isiv__

```

2. Use the **show vlans extensive** command to view VLAN information and link status for a PVLAN on a single switch or for a PVLAN spanning multiple switches.

- For a PVLAN on a single switch:

```

user@switch> show vlans pvlan extensive
VLAN: pvlan, Created at: time
802.1Q Tag: vlan-id, Internal index: index-number, Admin State: Enabled,
Origin: Static
Private VLAN Mode: Primary
Protocol: Port Mode
Number of interfaces: Tagged 2 (Active = 0), Untagged 6 (Active = 0)
  trunk1, tagged, trunk
  interface a, untagged, access
  interface b, untagged, access
  interface c, untagged, access
  interface d, untagged, access
  interface e, untagged, access
  interface f, untagged, access
  trunk2, tagged, trunk
Secondary VLANs: Isolated 2, Community 2
Isolated VLANs :
  __pvlan_pvlan_isolated1__
  __pvlan_pvlan_isolated2__
Community VLANs :
  community1
  community2

```

- For a PVLAN spanning multiple switches:

```

user@switch> show vlans extensive
VLAN: COM1, Created at: Tue May 11 18:16:05 2010
802.1Q Tag: 100, Internal index: 3, Admin State: Enabled, Origin: Static
Private VLAN Mode: Community, Primary VLAN: primary
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 3 (Active = 3), Untagged 1 (Active = 1)
  ge-0/0/20.0*, tagged, trunk
  ge-0/0/22.0*, tagged, trunk, pvlan-trunk
  ge-0/0/23.0*, tagged, trunk, pvlan-trunk
  ge-0/0/7.0*, untagged, access

VLAN: __pvlan_primary_ge-0/0/0.0__, Created at: Tue May 11 18:16:05 2010
Internal index: 5, Admin State: Enabled, Origin: Static
Private VLAN Mode: Isolated, Primary VLAN: primary
Protocol: Port Mode, Mac aging time: 300 seconds
Number of interfaces: Tagged 3 (Active = 3), Untagged 1 (Active = 1)
  ge-0/0/20.0*, tagged, trunk
  ge-0/0/22.0*, tagged, trunk, pvlan-trunk
  ge-0/0/23.0*, tagged, trunk, pvlan-trunk
  ge-0/0/0.0*, untagged, access

```



VLAN: \_\_pvlan\_primary\_ge-0/0/2.0\_\_, Created at: Tue May 11 18:16:05 2010  
 Internal index: 6, Admin State: Enabled, Origin: Static  
 Private VLAN Mode: Isolated, Primary VLAN: primary  
 Protocol: Port Mode, Mac aging time: 300 seconds  
 Number of interfaces: Tagged 3 (Active = 3), Untagged 1 (Active = 0)  
     ge-0/0/20.0\*, tagged, trunk  
     ge-0/0/22.0\*, tagged, trunk, pvlan-trunk  
     ge-0/0/23.0\*, tagged, trunk, pvlan-trunk  
     ge-0/0/2.0, untagged, access

VLAN: \_\_pvlan\_primary\_isiv\_\_, Created at: Tue May 11 18:16:05 2010  
 802.1Q Tag: 50, Internal index: 7, Admin State: Enabled, Origin: Static  
 Private VLAN Mode: Inter-switch-isolated, Primary VLAN: primary  
 Protocol: Port Mode, Mac aging time: 300 seconds  
 Number of interfaces: Tagged 3 (Active = 3), Untagged 0 (Active = 0)  
     ge-0/0/20.0\*, tagged, trunk  
     ge-0/0/22.0\*, tagged, trunk, pvlan-trunk  
     ge-0/0/23.0\*, tagged, trunk, pvlan-trunk

VLAN: community2, Created at: Tue May 11 18:16:05 2010  
 802.1Q Tag: 20, Internal index: 8, Admin State: Enabled, Origin: Static  
 Private VLAN Mode: Community, Primary VLAN: primary  
 Protocol: Port Mode, Mac aging time: 300 seconds  
 Number of interfaces: Tagged 3 (Active = 3), Untagged 2 (Active = 2)  
     ge-0/0/20.0\*, tagged, trunk  
     ge-0/0/22.0\*, tagged, trunk, pvlan-trunk  
     ge-0/0/23.0\*, tagged, trunk, pvlan-trunk  
     ge-0/0/1.0\*, untagged, access  
     ge-1/0/6.0\*, untagged, access

VLAN: primary, Created at: Tue May 11 18:16:05 2010  
 802.1Q Tag: 10, Internal index: 2, Admin State: Enabled, Origin: Static  
 Private VLAN Mode: Primary  
 Protocol: Port Mode, Mac aging time: 300 seconds  
 Number of interfaces: Tagged 3 (Active = 3), Untagged 5 (Active = 4)  
     ge-0/0/20.0\*, tagged, trunk  
     ge-0/0/22.0\*, tagged, trunk, pvlan-trunk  
     ge-0/0/23.0\*, tagged, trunk, pvlan-trunk  
     ge-0/0/0.0\*, untagged, access  
     ge-0/0/1.0\*, untagged, access  
     ge-0/0/2.0, untagged, access  
     ge-0/0/7.0\*, untagged, access  
     ge-1/0/6.0\*, untagged, access

Secondary VLANs: Isolated 2, Community 2, Inter-switch-isolated 1  
 Isolated VLANs :  
     \_\_pvlan\_primary\_ge-0/0/0.0\_\_  
     \_\_pvlan\_primary\_ge-0/0/2.0\_\_  
 Community VLANs :  
     COM1  
     community2  
 Inter-switch-isolated VLAN :  
     \_\_pvlan\_primary\_isiv\_\_



3. Use the **show ethernet-switching table** command to view logs for MAC learning on the VLANs:

```
user@switch> show ethernet-switching table
Ethernet-switching table: 8 entries, 1 learned
```

VLAN	MAC address	Type	Age	Interfaces
default	*	Flood	-	All-members
pvlan	*	Flood	-	All-members
pvlan	MAC1	Replicated	-	interface a
pvlan	MAC2	Replicated	-	interface c
pvlan	MAC3	Replicated	-	isolated2
pvlan	MAC4	Learn	0	trunk1
__pvlan_pvlan_isolated1__	*	Flood	-	All-members
__pvlan_pvlan_isolated1__	MAC4	Replicated	-	trunk1
__pvlan_pvlan_isolated2__	*	Flood	-	All-members
__pvlan_pvlan_isolated2__	MAC3	Learn	0	isolated2
__pvlan_pvlan_isolated2__	MAC4	Replicated	-	trunk1
community1	*	Flood	-	All-members
community1	MAC1	Learn	0	interface a
community1	MAC4	Replicated	-	trunk1
community2	*	Flood	-	All-members
community2	MAC2	Learn	0	interface c
community2	MAC4	Replicated	-	trunk1



**NOTE:** If you have configured a PVLAN spanning multiple switches, you can use the same command on all the switches to check the logs for MAC learning on those switches.

**Meaning** In the output displays for a PVLAN on a single switch, you can see that the primary VLAN contains two community domains (**community1** and **community2**), two isolated ports, and two trunk ports. The PVLAN on a single switch has only one tag (1000), which is for the primary VLAN.

The PVLAN that spans multiple switches contains multiple tags:



- The community domain **COM1** is identified with tag **100**.
- The community domain **community2** is identified with tag **20**.
- The interswitch isolated domain is identified with tag **50**.
- The primary VLAN **primary** is identified with tag **10**.

Also, for the PVLAN that spans multiple switches, the trunk interfaces are identified as **pvlan-trunk**.

#### Related Documentation

- [Creating a Private VLAN on a Single EX Series Switch \(CLI Procedure\)](#)
- [Creating a Private VLAN Spanning Multiple EX Series Switches \(CLI Procedure\)](#)
- [Creating a Private VLAN on a Single Switch on page 1560](#)
- [Creating a Private VLAN Spanning Multiple Switches on page 1561](#)

## Verifying That Proxy ARP Is Working Correctly

**Purpose** Verify that the switch is sending proxy ARP messages.

**Action** List the system statistics for ARP:

```
user@switch> show system statistics arp
arp:
198319 datagrams received
45 ARP requests received
12 ARP replies received
2 resolution requests received
2 unrestricted proxy requests
0 restricted proxy requests
0 received proxy requests
0 proxy requests not proxied
0 restricted-proxy requests not proxied
0 with bogus interface
0 with incorrect length
0 for non-IP protocol
0 with unsupported op code
0 with bad protocol address length
0 with bad hardware address length
0 with multicast source address
0 with multicast target address
0 with my own hardware address
168705 for an address not on the interface
0 with a broadcast source address
0 with source address duplicate to mine
29555 which were not for me
0 packets discarded waiting for resolution
4 packets sent after waiting for resolution
27 ARP requests sent
47 ARP replies sent
0 requests for memory denied
0 requests dropped on entry
0 requests dropped during retry
0 requests dropped due to interface deletion
0 requests on unnumbered interfaces
0 new requests on unnumbered interfaces
```



0 replies for from unnumbered interfaces  
0 requests on unnumbered interface with non-subnetted donor  
0 replies from unnumbered interface with non-subnetted donor

**Meaning** The statistics show that two proxy ARP requests were received, and the **proxy requests not proxied** field indicates that all the unproxied ARP requests received have been proxied by the switch.

**Related Documentation**

- [Configuring Proxy ARP \(CLI Procedure\)](#)

## Monitoring Commands

---



## clear ethernet-switching bpdu-error

---

<b>Syntax</b>	<code>clear ethernet-switching bpdu-error interface <i>interface-name</i></code>
<b>Release Information</b>	Command introduced in Junos OS Release 9.1 for EX Series switches. Command updated in Junos OS Release 11.1 for EX Series switches—a BPDU error shuts down the interface and this command brings the interface back up. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Clear bridge protocol data unit (BPDU) errors from an interface and bring up the interface.
<b>Options</b>	<i>interface-name</i> —Clear BPDU errors on the specified interface.
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show spanning-tree interface on page 1741</a></li> <li>• <a href="#">Understanding BPDU Protection for STP, RSTP, and MSTP on EX Series Switches</a></li> <li>• <a href="#">Understanding BPDU Protection for STP, RSTP, and MSTP on page 1413</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">clear ethernet-switching bpdu-error interface on page 1685</a>

### Sample Output

```
clear
ethernet-switching
bpdu-error interface
```

```
user@switch> clear ethernet-switching bpdu-error interface xe-0/0/1.0
```



## clear ethernet-switching layer2-protocol-tunneling error

---

<b>Syntax</b>	clear ethernet-switching layer2-protocol-tunneling error <interface <i>interface-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 10.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Clear Layer 2 protocol tunneling (L2PT) errors on one or more interfaces. If an interface has been disabled because the amount of Layer 2 protocol traffic exceeded the shutdown threshold or because the switch has detected an error in the network topology or configuration, use this command to reenable the interface.
<b>Options</b>	<b>none</b> —Clears L2PT errors on all interfaces.  <b>interface <i>interface-name</i></b> —(Optional) Clear L2PT errors on the specified interface.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Configuring Layer 2 Protocol Tunneling on EX Series Switches</li><li>• Configuring Layer 2 Protocol Tunneling on EX Series Switches (CLI Procedure)</li><li>• <a href="#">Configuring Layer 2 Protocol Tunneling on page 1563</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear ethernet-switching layer2-protocol-tunneling error on page 1686</a> <a href="#">clear ethernet-switching layer2-protocol-tunneling error interface xe-0/0/1.0 on page 1686</a>

### Sample Output

```
clear  
ethernet-switching  
layer2-protocol-tunneling  
error
```

```
user@switch> clear ethernet-switching layer2-protocol-tunneling error
```

```
clear  
ethernet-switching  
layer2-protocol-tunneling  
error interface  
xe-0/0/1.0
```

```
user@switch> clear ethernet-switching layer2-protocol-tunneling error interface xe-0/0/1.0
```



## clear ethernet-switching layer2-protocol-tunneling statistics

<b>Syntax</b>	clear ethernet-switching layer2-protocol-tunneling statistics <interface <i>interface-name</i> > <vlan <i>vlan-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 10.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Clear Layer 2 protocol tunneling (L2PT) statistics on one or more interfaces or VLANs.
<b>Options</b>	<p><b>none</b>—Clear L2PT statistics on all interfaces and VLANs.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Clear L2PT statistics on the specified interface.</p> <p><b>vlan <i>vlan-name</i></b>—(Optional) Clear L2PT statistics on the specified VLAN.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show ethernet-switching layer2-protocol-tunneling statistics on page 1697</a></li> <li>• Example: Configuring Layer 2 Protocol Tunneling on EX Series Switches</li> <li>• Configuring Layer 2 Protocol Tunneling on EX Series Switches (CLI Procedure)</li> <li>• <a href="#">Configuring Layer 2 Protocol Tunneling on page 1563</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">clear ethernet-switching layer2-protocol-tunneling statistics on page 1687</a> <a href="#">clear ethernet-switching layer2-protocol-tunneling error interface ge-0/1/1.0 on page 1687</a> <a href="#">clear ethernet-switching layer2-protocol-tunneling error vlan v2 on page 1687</a>

### Sample Output

```
clear
ethernet-switching
layer2-protocol-tunneling
statistics
```

```
user@switch> clear ethernet-switching layer2-protocol-tunneling statistics
```

```
clear
ethernet-switching
layer2-protocol-tunneling
error interface
ge-0/1/1.0
```


```
user@switch> clear ethernet-switching layer2-protocol-tunneling statistics interface xe-0/1/1.0
```

```
clear
ethernet-switching
layer2-protocol-tunneling
error vlan v2
```

```
user@switch> clear ethernet-switching layer2-protocol-tunneling statistics vlan v2
```



## clear ethernet-switching table

<b>Syntax</b>	clear ethernet-switching table <interface <i>interface-name</i> > <mac <i>mac-address</i> > <management-vlan> <persistent-mac < <i>interface</i>   <i>mac-address</i> >> <vlan <i>vlan-name</i> >
<b>Syntax (QFX Series)</b>	clear ethernet-switching table <interface <i>interface-name</i> > <mac <i>mac-address</i> > <persistent-mac < <i>interface</i>   <i>mac-address</i> >> <vlan <i>vlan-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 9.3 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	 <p><b>NOTE:</b> On a QFabric system, using this command on an FCoE-enabled VLAN when FCoE sessions are active can cause traffic flooding and FCoE traffic drop. The FCoE sessions are not terminated and the traffic reconverges after a short period of time.</p> <p>Clear learned entries, which are media access control (MAC) addresses, in the Ethernet switching table (also called the forwarding database table).</p>
<b>Options</b>	<p><b>none</b>—Clear learned entries in the Ethernet switching table, except for persistent MAC addresses.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Clear all learned MAC addresses for the specified interface from the Ethernet switching table.</p> <p><b>mac <i>mac-address</i></b>—(Optional) Clear the specified learned MAC address from the Ethernet switching table.</p> <p><b>management-vlan</b>—(Optional) Clear all MAC addresses learned for the management VLAN from the Ethernet switching table. Note that you do not specify a VLAN name because only one management VLAN exists.</p> <p><b>persistent-mac &lt;<i>interface</i>   <i>mac-address</i>&gt;</b>—(Optional) Clear all MAC addresses, including persistent MAC addresses. Use the <b>interface</b> option to clear all MAC addresses on an interface, or use the <b>mac-address</b> option to clear all entries for a specific MAC address.</p> <p>Use this command whenever you move a device in your network that has a persistent MAC address on the switch. If you move the device to another port on the switch and do not clear the persistent MAC address from the original port it was learned on, then the new port will not learn the MAC address and the device will not be able to connect. If the original port is down when you move the device, then the new port</p>



will learn the MAC address and the device can connect—however, unless you cleared the MAC address on the original port, when the port comes back up, the system reinstalls the persistent MAC address in the forwarding table for that port. If this occurs, the address is removed from the new port and the device loses connectivity.

**vlan *vlan-name***—(Optional) Clear all MAC addresses learned for the specified VLAN from the Ethernet switching table.

**Required Privilege Level**

view

**Related Documentation**

- show ethernet-switching table
- [show ethernet-switching table on page 1711](#)
- Verifying That Persistent MAC Learning Is Working Correctly

**List of Sample Output** [clear ethernet-switching table on page 1689](#)

**Output Fields** This command produces no output.

## Sample Output


`clear  
ethernet-switching  
table`

```
user@switch> clear ethernet-switching table
```



## clear spanning-tree statistics

---

<b>Syntax</b>	clear spanning-tree statistics <interface <i>interface-name</i> > <logical-system <i>logical-system-name</i> >
<b>Syntax (EX Series Switches and the QFX Series)</b>	clear spanning-tree statistics <interface <i>interface-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 8.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Clear Spanning Tree Protocol statistics.
<b>Options</b>	<b>none</b> —Reset STP counters for all interfaces for all routing instances.  <b>interface <i>interface-name</i></b> —(Optional) Clear STP statistics for the specified interface only.  <b>logical-system <i>logical-system-name</i></b> —(Optional) Clear STP statistics on a particular logical system.
	<div> <b>NOTE:</b> The <b>logical-system</b> option is not available on QFabric systems.</div>
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show spanning-tree statistics on page 1749</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear stp statistics on page 1690</a>

### Sample Output

**clear stp statistics**      user@host> clear stp statistics



## show ethernet-switching interfaces

<b>Syntax</b>	show ethernet-switching interfaces <brief   detail   summary> <interface <i>interface-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display information about switched Ethernet interfaces.
<b>Options</b>	<p><b>none</b>—(Optional) Display brief information for Ethernet-switching interfaces.</p> <p><b>brief   detail   summary</b>—(Optional) Display the specified level of output.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Display Ethernet-switching information for a specific interface.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show ethernet-switching interfaces on page 1693</a> <a href="#">show ethernet-switching interfaces summary on page 1693</a> <a href="#">show ethernet-switching interfaces brief on page 1693</a> <a href="#">show ethernet-switching interfaces detail on page 1693</a> <a href="#">show ethernet-switching interfaces interface-name on page 1694</a>
<b>Output Fields</b>	<a href="#">Table 96 on page 1347</a> lists the output fields for the <b>show ethernet-switching interfaces</b> command. Output fields are listed in the approximate order in which they appear.

**Table 125: show ethernet-switching interfaces Output Fields**

Field Name	Field Description	Level of Output
<b>Interface</b>	Name of a switching interface.	All levels
<b>State</b>	Interface state. Values are <b>up</b> or <b>down</b> .	none, <b>brief</b> , <b>detail</b> , <b>summary</b>
<b>VLAN members</b>	Name of a VLAN.	none, <b>brief</b> , <b>detail</b> , <b>summary</b>



Table 125: show ethernet-switching interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Blocking</b>	<p>Forwarding state of the interface:</p> <ul style="list-style-type: none"> <li>• <b>blocked</b>—Traffic is not being forwarded on the interface.</li> <li>• <b>unblocked</b>—Traffic is forwarded on the interface.</li> <li>• <b>MAC limit exceeded</b>—The interface is temporarily disabled because of a MAC limiting error. The disabled interface is automatically restored to service when the disable timeout expires.</li> <li>• <b>MAC move limit exceeded</b>—The interface is temporarily disabled because of a MAC move limiting error. The disabled interface is automatically restored to service when the disable timeout expires.</li> <li>• <b>Storm control in effect</b> —The interface is temporarily disabled because of a storm control error. The disabled interface is automatically restored to service when the disable timeout expires.</li> <li>• <b>Storm control shutdown in effect</b> —The interface is temporarily disabled because of a storm control shutdown error. The disabled interface is automatically restored to service when the disable timeout expires.</li> </ul>	none, <b>brief</b> , <b>detail</b> , <b>summary</b>
<b>Index</b>	VLAN index internal to Junos OS software.	<b>detail</b>
<b>untagged   tagged</b>	Specifies whether the interface forwards IEEE802.1Q-tagged or untagged traffic.	<b>detail</b>



## Sample Output

show  
ethernet-switching  
interfaces

user@switch> show ethernet-switching interfaces

Interface	State	VLAN members	Blocking
xe-0/0/0.0	up	T1122	unblocked
xe-0/0/1.0	down	default	– MAC limit exceeded
xe-0/0/2.0	down	default	– MAC move limit exceeded
xe-0/0/3.0	down	default	– Storm control in effect
xe-0/0/4.0	down	default	unblocked
xe-0/0/5.0	down	default	unblocked
xe-0/0/6.0	down	default	unblocked
xe-0/0/7.0	down	default	unblocked
xe-0/0/8.0	down	default	unblocked
xe-0/0/9.0	up	T111	unblocked
xe-0/0/10.0	down	default	unblocked
xe-0/0/11.0	down	default	unblocked
xe-0/0/12.0	down	default	unblocked
xe-0/0/13.0	down	default	unblocked
xe-0/0/14.0	down	default	unblocked
xe-0/0/15.0	down	default	unblocked
xe-0/0/16.0	down	default	unblocked
xe-0/0/17.0	down	default	unblocked
xe-0/0/18.0	down	default	unblocked
xe-0/0/19.0	up	T111	unblocked
xe-0/1/0.0	down	default	unblocked
xe-0/1/1.0	down	default	unblocked
xe-0/1/2.0	down	default	unblocked
xe-0/1/3.0	down	default	unblocked

show  
ethernet-switching  
interfaces summary

user@switch> show ethernet-switching interfaces summary

```
xe-0/0/0.0
xe-0/0/1.0
xe-0/0/2.0
xe-0/0/3.0
xe-0/0/8.0
xe-0/0/10.0
xe-0/0/11.0
```

show  
ethernet-switching  
interfaces brief

user@switch> show ethernet-switching interfaces brief

Interface	State	VLAN members	Blocking
xe-0/0/0.0	down	default	unblocked
xe-0/0/1.0	down	employee-vlan	unblocked
xe-0/0/2.0	down	employee-vlan	unblocked
xe-0/0/3.0	down	employee-vlan	unblocked
xe-0/0/8.0	down	employee-vlan	unblocked
xe-0/0/10.0	down	default	unblocked
xe-0/0/11.0	down	employee-vlan	unblocked

show  
ethernet-switching  
interfaces detail

user@switch> show ethernet-switching interfaces detail

```
Interface: xe-0/0/0.0 Index: 65
State: down
VLANs:
    default                untagged    unblocked

Interface: xe-0/0/1.0 Index: 66
State: down
```



```
VLANs:
  employee-vlan      untagged    unblocked

Interface: xe-0/0/2.0 Index: 67
State: down
VLANs:
  employee-vlan      untagged    unblocked

Interface: xe-0/0/3.0 Index: 68
State: down
VLANs:
  employee-vlan      untagged    unblocked

Interface: xe-0/0/8.0 Index: 69
State: down
VLANs:
  employee-vlan      untagged    unblocked

Interface: xe-0/0/10.0 Index: 70
State: down
VLANs:
  default            untagged    unblocked

Interface: xe-0/0/11.0 Index: 71
State: down
VLANs:
  employee-vlan      tagged      unblocked
```

**show**  
**ethernet-switching**  
**interfaces**  
**interface-name**

```
user@switch> show ethernet-switching interfaces xe-0/0/0.0
Interface  State  VLAN members  Blocking
xe-0/0/0.0 down   default       unblocked
```



## show ethernet-switching layer2-protocol-tunneling interface

<b>Syntax</b>	<code>show ethernet-switching-layer2-protocol-tunneling interface</code> <code>&lt;interface-name&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 10.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Display information about Layer 2 protocol tunneling (L2PT) on interfaces that have been configured for L2PT.
<b>Options</b>	<b>none</b> —Display L2PT information about all interfaces on which L2PT is enabled. <b>interface-name</b> —(Optional) Display L2PT information for the specified interface.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show ethernet-switching layer2-protocol-tunneling statistics on page 1697</a></li> <li>• <a href="#">show ethernet-switching layer2-protocol-tunneling vlan on page 1700</a></li> <li>• <a href="#">Configuring Layer 2 Protocol Tunneling on EX Series Switches (CLI Procedure)</a></li> <li>• <a href="#">show ethernet-switching layer2-protocol-tunneling statistics on page 1697</a></li> <li>• <a href="#">show ethernet-switching layer2-protocol-tunneling vlan on page 1700</a></li> <li>• <a href="#">Configuring Layer 2 Protocol Tunneling on page 1563</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show ethernet-switching layer2-protocol-tunneling interface on page 1696</a> <a href="#">show ethernet-switching layer2-protocol-tunneling interface xe-0/0/0.0 on page 1696</a>
<b>Output Fields</b>	Table 126 on page 1695 lists the output fields for the <b>show ethernet-switching layer2-protocol-tunneling interface</b> command. Output fields are listed in the approximate order in which they appear.

Table 126: show ethernet-switching layer2-protocol-tunneling interface Output Fields

Field Name	Field Description
<b>Interface</b>	Name of an interface on the switch.
<b>Operation</b>	Type of operation being performed on the interface. Values are <b>Encapsulation</b> and <b>Decapsulation</b> .
<b>State</b>	State of the interface. Values are <b>active</b> and <b>shutdown</b> .
<b>Description</b>	If the interface state is <b>shutdown</b> , displays why the interface is shut down. If the description says <b>Loop detected</b> , it means that the interface is an access interface that has received L2PT-enabled PDUs. Access interfaces should not receive L2PT-enabled PDUs. This scenario might mean that there is a loop in the network.



## Sample Output

show  
ethernet-switching  
layer2-protocol-tunneling  
interface

user@switch> show ethernet-switching layer2-protocol-tunneling interface

Layer2 Protocol Tunneling information:

Interface	Operation	State	Description
xe-0/0/0.0	Encapsulation	Shutdown	Shutdown threshold exceeded
xe-0/0/1.0	Decapsulation	Shutdown	Loop detected
xe-0/0/2.0	Decapsulation	Active	

show  
ethernet-switching  
layer2-protocol-tunneling  
interface xe-0/0/0.0

user@switch> show ethernet-switching layer2-protocol-tunneling interface xe-0/0/0.0

Layer2 Protocol Tunneling information:

Interface	Operation	State	Description
xe-0/0/0.0	Encapsulation	Shutdown	Shutdown threshold exceeded



## show ethernet-switching layer2-protocol-tunneling statistics


<b>Syntax</b>	show ethernet-switching-layer2-protocol-tunneling statistics <interface <i>interface-name</i> > <vlan <i>vlan-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 10.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Display Layer 2 protocol tunneling (L2PT) statistics for Layer 2 PDU packets received by the switch.
	 <p><b>NOTE:</b> The <code>show ethernet-switching-layer2-protocol-tunneling statistics</code> command does not display L2PT statistics for Layer 2 PDU packets transmitted from the switch.</p>
<b>Options</b>	<p><b>none</b>—Display L2PT statistics for all interfaces on which you enabled L2PT.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Display L2PT statistics for the specified interface.</p> <p><b>vlan <i>vlan-name</i></b>—(Optional) Display L2PT statistics for the specified VLAN.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">clear ethernet-switching layer2-protocol-tunneling statistics on page 1687</a></li> <li>• <a href="#">show ethernet-switching layer2-protocol-tunneling interface on page 1695</a></li> <li>• <a href="#">show ethernet-switching layer2-protocol-tunneling vlan on page 1700</a></li> <li>• <a href="#">show vlans</a></li> <li>• <a href="#">Example: Configuring Layer 2 Protocol Tunneling on EX Series Switches</a></li> <li>• <a href="#">Configuring Layer 2 Protocol Tunneling on EX Series Switches (CLI Procedure)</a></li> <li>• <a href="#">show vlans on page 1752</a></li> <li>• <a href="#">Configuring Layer 2 Protocol Tunneling on page 1563</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show ethernet-switching layer2-protocol-tunneling statistics on page 1698</a> <a href="#">show ethernet-switching layer2-protocol-tunneling statistics interface xe-0/0/0.0 on page 1698</a> <a href="#">show ethernet-switching layer2-protocol-tunneling statistics vlan v2 on page 1698</a>
<b>Output Fields</b>	Table 127 on page 1698 lists the output fields for the <code>show ethernet-switching layer2-protocol-tunneling statistics</code> command. Output fields are listed in the approximate order in which they appear.



Table 127: show ethernet-switching layer2-protocol-tunneling statistics Output Fields

VLAN	Field Description
VLAN	Name of a VLAN on which L2PT has been configured.
Interface	Name of an interface on which L2PT has been configured.
Protocol	Name of a protocol for which L2PT has been enabled. Values are <b>all</b> , <b>802.1x</b> , <b>802.3ah</b> , <b>cdp</b> , <b>e-lmi</b> , <b>gvrp</b> , <b>lACP</b> , <b>lldp</b> , <b>mmrp</b> , <b>mvrp</b> , <b>stp</b> , <b>udld</b> , <b>vstp</b> , and <b>vtp</b> .
Operation	Type of operation being performed on the interface. Values are <b>Encapsulation</b> and <b>Decapsulation</b> .
Packets	Number of packets that have been encapsulated or de-encapsulated.
Drops	Number of packets that have exceeded the drop threshold and have been dropped.
Shutdowns	Number of times that packets have exceeded the shutdown threshold and the interface has been shut down.

## Sample Output

show  
ethernet-switching  
layer2-protocol-tunneling  
statistics

```
user@switch> show ethernet-switching layer2-protocol-tunneling statistics
```

```
Layer2 Protocol Tunneling Statistics:
VLAN  Interface  Protocol  Operation  Packets  Drops  Shutdowns
v1    xe-0/0/0.0  mvrp     Encapsulation  0        0        0
v1    xe-0/0/1.0  mvrp     Decapsulation  0        0        0
v1    xe-0/0/2.0  mvrp     Decapsulation  60634    0        0
v2    xe-0/0/0.0  cdp      Encapsulation  0        0        0
v2    xe-0/0/0.0  gvrp     Encapsulation  0        0        0
v2    xe-0/0/0.0  lldp     Encapsulation  0        0        0
```

show  
ethernet-switching  
layer2-protocol-tunneling  
statistics interface  
xe-0/0/0.0

```
user@switch> show ethernet-switching layer2-protocol-tunneling statistics interface xe-0/0/0.0
```

```
Layer2 Protocol Tunneling Statistics:
VLAN  Interface  Protocol  Operation  Packets  Drops  Shutdowns
v1    xe-0/0/0.0  mvrp     Encapsulation  0        0        0
v2    xe-0/0/0.0  cdp      Encapsulation  0        0        0
v2    xe-0/0/0.0  gvrp     Encapsulation  0        0        0
v2    xe-0/0/0.0  lldp     Encapsulation  0        0        0
v2    xe-0/0/0.0  mvrp     Encapsulation  0        0        0
v2    xe-0/0/0.0  stp      Encapsulation  0        0        0
v2    xe-0/0/0.0  vtp      Encapsulation  0        0        0
v2    xe-0/0/0.0  vstp     Encapsulation  0        0        0
```

show  
ethernet-switching

```
user@switch> show ethernet-switching layer2-protocol-tunneling statistics vlan v2
```

```
Layer2 Protocol Tunneling Statistics:
```



layer2-protocol-tunneling statistics vlan v2	VLAN	Interface	Protocol	Operation	Packets	Drops	Shutdowns
	v2	xe-0/0/0.0	cdp	Encapsulation	0	0	0
	v2	xe-0/0/0.0	gvrp	Encapsulation	0	0	0
	v2	xe-0/0/0.0	lldp	Encapsulation	0	0	0
	v2	xe-0/0/0.0	mvrp	Encapsulation	0	0	0
	v2	xe-0/0/0.0	stp	Encapsulation	0	0	0
	v2	xe-0/0/0.0	vtp	Encapsulation	0	0	0
	v2	xe-0/0/0.0	vstp	Encapsulation	0	0	0
	v2	xe-0/0/1.0	cdp	Decapsulation	0	0	0
	v2	xe-0/0/1.0	gvrp	Decapsulation	0	0	0
	v2	xe-0/0/1.0	lldp	Decapsulation	0	0	0
	v2	xe-0/0/1.0	mvrp	Decapsulation	0	0	0
	v2	xe-0/0/1.0	stp	Decapsulation	0	0	0
	v2	xe-0/0/1.0	vtp	Decapsulation	0	0	0



## show ethernet-switching layer2-protocol-tunneling vlan

<b>Syntax</b>	show ethernet-switching-layer2-protocol-tunneling vlan <vlan-name>
<b>Release Information</b>	Command introduced in Junos OS Release 10.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Display information about Layer 2 protocol tunneling (L2PT) on VLANs that have been configured for L2PT.
<b>Options</b>	<b>none</b> —Display information about L2PT for the VLANs on which you have configured L2PT. <b>vlan-name</b> —(Optional) Display information about L2PT for the specified VLAN.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show ethernet-switching layer2-protocol-tunneling interface on page 1695</a></li> <li>• <a href="#">show ethernet-switching layer2-protocol-tunneling statistics on page 1697</a></li> <li>• <a href="#">show vlans</a></li> <li>• <a href="#">Example: Configuring Layer 2 Protocol Tunneling on EX Series Switches</a></li> <li>• <a href="#">Configuring Layer 2 Protocol Tunneling on EX Series Switches (CLI Procedure)</a></li> <li>• <a href="#">show vlans on page 1752</a></li> <li>• <a href="#">Configuring Layer 2 Protocol Tunneling on page 1563</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show ethernet-switching layer2-protocol-tunneling vlan on page 1701</a> <a href="#">show ethernet-switching layer2-protocol-tunneling vlan v2 on page 1701</a>
<b>Output Fields</b>	Table 128 on page 1700 lists the output fields for the <b>show ethernet-switching layer2-protocol-tunneling vlan</b> command. Output fields are listed in the approximate order in which they appear.

Table 128: show ethernet-switching layer2-protocol-tunneling vlan Output Fields

Field Name	Field Description
VLAN	Name of the VLAN on which L2PT has been configured.
Protocol	Name of a protocol for which L2PT has been enabled. Values are <b>all</b> , <b>802.1x</b> , <b>802.3ah</b> , <b>cdp</b> , <b>e-lmi</b> , <b>gvrp</b> , <b>lACP</b> , <b>lldp</b> , <b>mmrp</b> , <b>mvrp</b> , <b>stp</b> , <b>vstp</b> , and <b>vtp</b> .
Drop Threshold	Maximum number of Layer 2 PDUs of the specified protocol that can be received per second on the VLAN before the switch begins dropping the Layer 2 PDUs.
Shutdown Threshold	Maximum number of Layer 2 PDUs of the specified protocol that can be received per second on the VLAN before the interface is disabled.



## Sample Output

show  
ethernet-switching  
layer2-protocol-tunneling  
vlan

user@switch> show ethernet-switching layer2-protocol-tunneling vlan

```
Layer2 Protocol Tunneling VLAN information:
VLAN          Protocol      Drop          Shutdown
                Threshold Threshold
v1             mvrp          100           200
v2             cdp            0             0
v2             cdp            0             0
v2             gvrp           0             0
```

show  
ethernet-switching  
layer2-protocol-tunneling  
vlan v2

user@switch> show ethernet-switching layer2-protocol-tunneling vlan v2

```
Layer2 Protocol Tunneling VLAN information:
VLAN          Protocol      Drop          Shutdown
                Threshold Threshold
v2             cdp            0             0
v2             cdp            0             0
v2             gvrp           0             0
```



## show ethernet-switching mac-learning-log

<b>Syntax</b>	show ethernet-switching mac-learning-log
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Displays the event log of learned MAC addresses.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show ethernet-switching table on page 1711</a></li> <li>• <a href="#">show ethernet-switching interfaces on page 1347</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show ethernet-switching mac-learning-log on page 1703</a>
<b>Output Fields</b>	Table 129 on page 1702 lists the output fields for the <b>show ethernet-switching mac-learning-log</b> command. Output fields are listed in the approximate order in which they appear.

Table 129: show ethernet-switching mac-learning-log Output Fields

Field Name	Field Description
<b>Date and Time</b>	Timestamp when the MAC address was added or deleted from the log.
<b>vlan_name</b>	VLAN name. A value defined by the user for all user-configured VLANs.
<b>MAC</b>	Learned MAC address.
<b>Deleted   Added</b>	MAC address deleted from or added to the MAC learning log.
<b>Blocking</b>	Forwarding state of the interface: <ul style="list-style-type: none"> <li>• <b>blocked</b>—Traffic is not being forwarded on the interface.</li> <li>• <b>unblocked</b>—Traffic is forwarded on the interface.</li> </ul>



## Sample Output

show  
ethernet-switching  
mac-learning-log

```
user@switch> show ethernet-switching mac-learning-log
Mon Feb 25 08:07:05 2008
  vlan_name v1 mac 00:00:00:00:00:00 was deleted
Mon Feb 25 08:07:05 2008
  vlan_name v9 mac 00:00:00:00:00:00 was deleted
Mon Feb 25 08:07:05 2008
  vlan_name HR_vlan mac 00:00:00:00:00:00 was deleted
Mon Feb 25 08:07:05 2008
  vlan_name v3 mac 00:00:00:00:00:00 was deleted
Mon Feb 25 08:07:05 2008
  vlan_name v12 mac 00:00:00:00:00:00 was deleted
Mon Feb 25 08:07:05 2008
  vlan_name v13 mac 00:00:00:00:00:00 was deleted
Mon Feb 25 08:07:05 2008
  vlan_name sales_vlan mac 00:00:00:00:00:00 was deleted
Mon Feb 25 08:07:05 2008
  vlan_name employee1 mac 00:00:00:00:00:00 was deleted
Mon Feb 25 08:07:05 2008
  vlan_name employee2 mac 00:00:00:00:00:00 was deleted
Mon Feb 25 08:07:05 2008
  vlan_name v3 mac 00:00:00:00:00:00 was added
Mon Feb 25 08:07:05 2008
  vlan_name HR_vlan mac 00:00:00:00:00:00 was added
Mon Feb 25 08:07:05 2008
  vlan_name employee2 mac 00:00:00:00:00:00 was added
Mon Feb 25 08:07:05 2008
  vlan_name employee1 mac 00:00:00:00:00:00 was added
Mon Feb 25 08:07:05 2008
  vlan_name employee2 mac 00:00:05:00:00:05 was learned
Mon Feb 25 08:07:05 2008
  vlan_name employee1 mac 00:30:48:90:54:89 was learned
Mon Feb 25 08:07:05 2008
  vlan_name HR_vlan mac 00:00:5e:00:01:00 was learned
Mon Feb 25 08:07:05 2008
  vlan_name sales_vlan mac 00:00:5e:00:01:08 was learned
[output truncated]
```



## show ethernet-switching mac-notification

<b>Syntax</b>	show ethernet-switching mac-notification
<b>Release Information</b>	Command introduced in Junos OS Release 9.6 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display information about MAC notification.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Verifying That MAC Notification Is Working Properly</li> </ul>
<b>List of Sample Output</b>	<a href="#">show ethernet-switching mac-notification (MAC Notification Enabled) on page 1704</a> <a href="#">show ethernet-switching mac-notification (MAC Notification Disabled) on page 1704</a>
<b>Output Fields</b>	Table 130 on page 1704 lists the output fields for the <b>show ethernet-switching mac-notification</b> command. Output fields are listed in the order in which they appear.

Table 130: show ethernet-switching mac-notification Output Fields

Field Name	Field Description
<b>Notification Status</b>	MAC notification status: <ul style="list-style-type: none"> <li><b>Enabled</b>—MAC notification is enabled.</li> <li><b>Disabled</b>—MAC notification is disabled.</li> </ul>
<b>Notification Interval</b>	MAC notification interval in seconds.

### Sample Output

```
show ethernet-switching mac-notification (MAC Notification Enabled)
user@switch> show ethernet-switching mac-notification
Notification Status           : Enabled
Notification Interval         : 30
```

### Sample Output

```
show ethernet-switching mac-notification (MAC Notification Disabled)
user@switch> show ethernet-switching mac-notification
Notification Status           : Disabled
Notification Interval         : 0
```



## show ethernet-switching statistics aging

<b>Syntax</b>	show ethernet-switching statistics aging <brief   detail>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display media access control (MAC) aging statistics.
<b>Options</b>	<b>none</b> —(Optional) Display MAC aging statistics. <b>brief   detail</b> —(Optional) Display the specified level of output.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show ethernet-switching statistics mac-learning on page 1707</a></li> <li>• <a href="#">mac-table-aging-time on page 1610</a></li> <li>• <a href="#">Configuring MAC Table Aging on page 1549</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show ethernet-switching statistics aging on page 1706</a>
<b>Output Fields</b>	<a href="#">Table 131 on page 1705</a> lists the output fields for the <b>show ethernet-switching statistics aging</b> command. Output fields are listed in the approximate order in which they appear.

**Table 131: show ethernet-switching statistics aging Output Fields**

Field Name	Field Description	Level of Output
<b>Total age messages received</b>	Total number of aging messages received from the hardware.	All levels
<b>Immediate aging</b>	Aging message indicating that the entry should be removed immediately.	All levels
<b>MAC address seen</b>	Aging message indicating that the MAC address has been detected by hardware and that the aging timer should be stopped.	All levels
<b>MAC address not seen</b>	Aging message indicating that the MAC address has not been detected by the hardware and that the aging timer should be started.	All levels
<b>Error age messages</b>	The received aging message contains the following errors: <ul style="list-style-type: none"> <li>• <b>Invalid VLAN</b>—The VLAN of the packet does not exist.</li> <li>• <b>No such entry</b>—The MAC address and VLAN pair provided by the aging message does not exist.</li> <li>• <b>Static entry</b>—An unsuccessful attempt was made to age out a static MAC entry.</li> </ul>	All levels



## Sample Output

show  
ethernet-switching  
statistics aging

```
user@switch> show ethernet-switching statistics aging
```

```
Total age messages received: 0
```

```
  Immediate aging: 0, MAC address seen: 0, MAC address not seen: 0
```

```
Error age messages: 0
```

```
  Invalid VLAN: 0, No such entry: 0, Static entry: 0
```



## show ethernet-switching statistics mac-learning

<b>Syntax</b>	show ethernet-switching statistics mac-learning <brief   detail> <interface <i>interface-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 9.4 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display media access control (MAC) learning statistics.
<b>Options</b>	<p><b>none</b>—(Optional) Display MAC learning statistics for all interfaces.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output. The default is <b>brief</b>.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Display MAC learning statistics for the specified interface.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• show ethernet-switching statistics aging</li> <li>• show ethernet-switching mac-learning-log</li> <li>• show ethernet-switching table</li> <li>• show ethernet-switching interfaces</li> <li>• Example: Setting Up Basic Bridging and a VLAN for an EX Series Switch</li> <li>• Example: Setting Up Bridging with Multiple VLANs for EX Series Switches</li> <li>• <a href="#">show ethernet-switching statistics aging on page 1705</a></li> <li>• <a href="#">show ethernet-switching mac-learning-log on page 1702</a></li> <li>• <a href="#">show ethernet-switching table on page 1711</a></li> <li>• <a href="#">show ethernet-switching interfaces on page 1347</a></li> <li>• Example: Setting Up Basic Bridging and a VLAN on the QFX Series on page 1467</li> <li>• Example: Setting Up Bridging with Multiple VLANs on page 1476</li> </ul>
<b>List of Sample Output</b>	<a href="#">show ethernet-switching statistics mac-learning on page 1709</a> <a href="#">show ethernet-switching statistics mac-learning detail on page 1709</a> <a href="#">show ethernet-switching statistics mac-learning interface ge-0/0/28 detail on page 1709</a> <a href="#">show ethernet-switching statistics mac-learning interface on page 1709</a> <a href="#">show ethernet-switching statistics mac-learning detail (QFX Series) on page 1710</a>
<b>Output Fields</b>	<a href="#">Table 132 on page 1708</a> lists the output fields for the <b>show ethernet-switching statistics mac-learning</b> command. Output fields are listed in the approximate order in which they appear.



Table 132: show ethernet-switching statistics mac-learning Output Fields

Field Name	Field Description	Level of Output
<b>Interface</b>	Name of the interface for which statistics are being reported. (Displayed in the output under the heading <b>Interface</b> .)	All levels
<b>Learning message from local packets</b>	MAC learning message generated due to packets coming in on the management interface. (Displayed in the output under the heading <b>Local pkts</b> .)	All levels
<b>Learning message from transit packets</b>	MAC learning message generated due to packets coming in on network interfaces. (Displayed in the output under the heading <b>Transit pkts</b> .)	All levels
<b>Learning message with error</b>	<p>MAC learning messages received with errors (Displayed under the heading <b>Error</b>):</p> <ul style="list-style-type: none"> <li>• <b>Invalid VLAN</b>—The VLAN of the packet does not exist.</li> <li>• <b>Invalid MAC</b>—The MAC address is either NULL or a multicast MAC address.</li> <li>• <b>Security violation</b>—The MAC address is not an allowed MAC address.</li> <li>• <b>Interface down</b>—The MAC address is learned on an interface that is down.</li> <li>• <b>Incorrect membership</b>—The MAC address is learned on an interface that is not a member of the VLAN.</li> <li>• <b>Interface limit</b>—The number of MAC addresses learned on the interface has exceeded the limit.</li> <li>• <b>MAC move limit</b>—This MAC address has moved among multiple interfaces too many times in a given interval.</li> <li>• <b>VLAN limit</b>—The number of MAC addresses learned on the VLAN has exceeded the limit.</li> <li>• <b>VLAN membership limit</b>—The number of MAC addresses learned on the interface as a member of the specified VLAN (VLAN membership MAC limit) has exceeded the limit.</li> <li>• <b>Invalid VLAN index</b>—The VLAN of the packet, although configured, does not yet exist in the kernel.</li> <li>• <b>Interface not learning</b>—The MAC address is learned on an interface that does not yet allow learning—for example, the interface is blocked.</li> <li>• <b>No nexthop</b>—The MAC address is learned on an interface that does not have a unicast next hop.</li> <li>• <b>MAC learning disabled</b>—The MAC address is learned on an interface on which MAC learning has been disabled.</li> <li>• <b>Others</b>—The message contains some other error.</li> </ul>	All levels



## Sample Output

show  
ethernet-switching  
statistics mac-learning

user@switch> show ethernet-switching statistics mac-learning

```
Learning stats: 0 learn msg rcvd, 0 error
Interface      Local pkts      Transit pkts      Error
ge-0/0/0.0      0                0                0
ge-0/0/1.0      0                0                0
ge-0/0/2.0      0                0                0
ge-0/0/3.0      0                0                0
```

show  
ethernet-switching  
statistics mac-learning  
detail

user@switch> show ethernet-switching statistics mac-learning detail

```
Learning stats: 0 learn msg rcvd, 0 error

Interface: ge-0/0/0.0
Learning message from local packets: 0
Learning message from transit packets: 1
Learning message with error: 0
  Invalid VLAN: 0      Invalid MAC: 0
  Security violation: 0      Interface down: 0
  Incorrect membership: 0      Interface limit: 0
  MAC move limit: 0      VLAN limit: 0
  Invalid VLAN index: 0      Interface not learning: 0
  No nexthop: 0      MAC learning disabled: 0
  Others: 0

Interface: ge-0/0/1.0
Learning message from local packets: 0
Learning message from transit packets: 2
Learning message with error: 0
  Invalid VLAN: 0      Invalid MAC: 0
  Security violation: 0      Interface down: 0
  Incorrect membership: 0      Interface limit: 0
  MAC move limit: 0      VLAN limit: 0
  Invalid VLAN index: 0      Interface not learning: 0
  No nexthop: 0      MAC learning disabled: 0
  Others: 0
```

show  
ethernet-switching  
statistics mac-learning  
interface ge-0/0/28  
detail

user@switch> show ethernet-switching statistics mac-learning interface ge-0/0/28 detail

```
Interface: ge-0/0/28.0
Learning message from local packets: 0
Learning message from transit packets: 5
Learning message with error: 0
  Invalid VLAN: 0      Invalid MAC: 0
  Security violation: 0      Interface down: 0
  Incorrect membership: 0      Interface limit: 0
  MAC move limit: 0      VLAN limit: 0
                          VLAN membership limit: 20
  Invalid VLAN index: 0      Interface not learning: 0
  No nexthop: 0      MAC learning disabled: 0
  Others: 0
```

show  
ethernet-switching

user@switch> show ethernet-switching statistics mac-learning interface ge-0/0/1



	Interface	Local pkts	Transit pkts	Error
statistics mac-learning interface	ge-0/0/1.0	0	1	1

show  
ethernet-switching  
statistics mac-learning  
detail (QFX Series)

user@switch> show ethernet-switching statistics mac-learning detail

Learning stats: 0 learn msg rcvd, 0 error

Interface: xe-0/0/0.0

Learning message from local packets: 0

Learning message from transit packets: 1

Learning message with error: 0

Invalid VLAN:	0	Invalid MAC:	0
---------------	---	--------------	---

Security violation:	0	Interface down:	0
---------------------	---	-----------------	---

Incorrect membership:	0	Interface limit:	0
-----------------------	---	------------------	---

MAC move limit:	0	VLAN limit:	0
-----------------	---	-------------	---

Invalid VLAN index:	0	Interface not learning:	0
---------------------	---	-------------------------	---

No nexthop:	0	MAC learning disabled:	0
-------------	---	------------------------	---

Others:	0		
---------	---	--	--

Interface: xe-0/0/1.0

Learning message from local packets: 0

Learning message from transit packets: 2

Learning message with error: 0

Invalid VLAN:	0	Invalid MAC:	0
---------------	---	--------------	---

Security violation:	0	Interface down:	0
---------------------	---	-----------------	---

Incorrect membership:	0	Interface limit:	0
-----------------------	---	------------------	---

MAC move limit:	0	VLAN limit:	0
-----------------	---	-------------	---

Invalid VLAN index:	0	Interface not learning:	0
---------------------	---	-------------------------	---

No nexthop:	0	MAC learning disabled:	0
-------------	---	------------------------	---

Others:	0		
---------	---	--	--



## show ethernet-switching table

<b>Syntax</b>	show ethernet-switching table <brief   detail   extensive   summary> <interface <i>interface-name</i> > <management-vlan> <sort-by ( <i>name</i>   <i>tag</i> )> <vlan <i>vlan-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series. Output for private VLANs introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Displays the Ethernet switching table.
<b>Options</b>	<p><b>none</b>—(Optional) Display brief information about the Ethernet switching table.</p> <p><b>brief   detail   extensive   summary</b>—(Optional) Display the specified level of output.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Display the Ethernet switching table for a specific interface.</p> <p><b>management-vlan</b>—(Optional) Display the Ethernet switching table for a management VLAN.</p> <p><b>sort-by (<i>name</i>   <i>tag</i>)</b>—(Optional) Display VLANs in ascending order of VLAN IDs or VLAN names.</p> <p><b>vlan <i>vlan-name</i></b>—(Optional) Display the Ethernet switching table for a specific VLAN.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Setting Up Basic Bridging and a VLAN on the QFX Series on page 1467</a></li> <li>• <a href="#">Example: Setting Up Bridging with Multiple VLANs on page 1476</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show ethernet-switching table on page 1713</a> <a href="#">show ethernet-switching table (Private VLANs) on page 1713</a> <a href="#">show ethernet-switching table brief on page 1713</a> <a href="#">show ethernet-switching table detail on page 1714</a> <a href="#">show ethernet-switching table extensive on page 1715</a> <a href="#">show ethernet-switching table interface on page 1717</a>
<b>Output Fields</b>	<a href="#">Table 133 on page 1711</a> lists the output fields for the <b>show ethernet-switching table</b> command. Output fields are listed in the approximate order in which they appear.

**Table 133: show ethernet-switching table Output Fields**

Field Name	Field Description	Level of Output
VLAN	Name of a VLAN.	All levels



Table 133: show ethernet-switching table Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>MAC address</b>	MAC address associated with the VLAN.	All levels
<b>Type</b>	Type of MAC address: <ul style="list-style-type: none"> <li>• <b>static</b>—The MAC address is manually created.</li> <li>• <b>learn</b>—The MAC address is learned dynamically from a packet's source MAC address.</li> <li>• <b>flood</b>—The MAC address is unknown and flooded to all members.</li> </ul>	All levels
<b>Age</b>	Time remaining before the entry ages out and is removed from the Ethernet switching table.	All levels
<b>Interfaces</b>	Interface associated with learned MAC addresses or with the <b>All-members</b> option (flood entry).	All levels
<b>Learned</b>	For learned entries, the time at which the entry was added to the Ethernet switching table.	<b>detail, extensive</b>



## Sample Output

show  
ethernet-switching  
table

```
user@switch> show ethernet-switching table
Ethernet-switching table: 57 entries, 17 learned
VLAN          MAC address      Type      Age Interfaces
F2             *                Flood     - All-members
F2             00:00:05:00:00:03 Learn     0 xe-0/0/44.0
F2             00:19:e2:50:7d:e0 Static    - Router
Linux          *                Flood     - All-members
Linux          00:19:e2:50:7d:e0 Static    - Router
Linux          00:30:48:90:54:89 Learn     0 xe-0/0/47.0
T1             *                Flood     - All-members
T1             00:00:05:00:00:01 Learn     0 xe-0/0/46.0
T1             00:00:5e:00:01:00 Static    - Router
T1             00:19:e2:50:63:e0 Learn     0 xe-0/0/46.0
T1             00:19:e2:50:7d:e0 Static    - Router
T10            *                Flood     - All-members
T10            00:00:5e:00:01:09 Static    - Router
T10            00:19:e2:50:63:e0 Learn     0 xe-0/0/46.0
T10            00:19:e2:50:7d:e0 Static    - Router
T111           *                Flood     - All-members
T111           00:19:e2:50:63:e0 Learn     0 xe-0/0/15.0
T111           00:19:e2:50:7d:e0 Static    - Router
T111           00:19:e2:50:ac:00 Learn     0 xe-0/0/15.0
T2             *                Flood     - All-members
T2             00:00:5e:00:01:01 Static    - Router
T2             00:19:e2:50:63:e0 Learn     0 xe-0/0/46.0
T2             00:19:e2:50:7d:e0 Static    - Router
T3             *                Flood     - All-members
T3             00:00:5e:00:01:02 Static    - Router
T3             00:19:e2:50:63:e0 Learn     0 xe-0/0/46.0
T3             00:19:e2:50:7d:e0 Static    - Router
T4             *                Flood     - All-members
T4             00:00:5e:00:01:03 Static    - Router
T4             00:19:e2:50:63:e0 Learn     0 xe-0/0/46.0
[output truncated]
```

show  
ethernet-switching  
table (Private VLANs)

```
user@switch> show ethernet-switching table
Ethernet-switching table: 10 entries, 3 learned
VLAN          MAC address      Type      Age Interfaces
pvlan         *                Flood     - All-members
pvlan         00:10:94:00:00:02 Replicated - xe-0/0/28.0
pvlan         00:10:94:00:00:35 Replicated - xe-0/0/46.0
pvlan         00:10:94:00:00:46 Replicated - xe-0/0/4.0
c2            *                Flood     - All-members
c2            00:10:94:00:00:02 Learn     0 xe-0/0/28.0
c1            *                Flood     - All-members
c1            00:10:94:00:00:46 Learn     0 xe-0/0/4.0
__pvlan_pvlan_xe-0/0/46.0__ * Flood     - All-members
__pvlan_pvlan_xe-0/0/46.0__ 00:10:94:00:00:35 Learn 0 xe-0/0/46.0
```

show  
ethernet-switching  
table brief

```
user@switch> show ethernet-switching table brief
Ethernet-switching table: 57 entries, 17 learned
VLAN          MAC address      Type      Age Interfaces
F2             *                Flood     - All-members
F2             00:00:05:00:00:03 Learn     0 xe-0/0/44.0
F2             00:19:e2:50:7d:e0 Static    - Router
Linux          *                Flood     - All-members
```



```

Linux          00:19:e2:50:7d:e0 Static      - Router
Linux          00:30:48:90:54:89 Learn       0 xe-0/0/47.0
T1             *          Flood        - All-members
T1             00:00:05:00:00:01 Learn       0 xe-0/0/46.0
T1             00:00:5e:00:01:00 Static      - Router
T1             00:19:e2:50:63:e0 Learn       0 xe-0/0/46.0
T1             00:19:e2:50:7d:e0 Static      - Router
T10            *          Flood        - All-members
T10            00:00:5e:00:01:09 Static      - Router
T10            00:19:e2:50:63:e0 Learn       0 xe-0/0/46.0
T10            00:19:e2:50:7d:e0 Static      - Router
T111           *          Flood        - All-members
T111           00:19:e2:50:63:e0 Learn       0 xe-0/0/15.0
T111           00:19:e2:50:7d:e0 Static      - Router
T111           00:19:e2:50:ac:00 Learn       0 xe-0/0/15.0
T2             *          Flood        - All-members
T2             00:00:5e:00:01:01 Static      - Router
T2             00:19:e2:50:63:e0 Learn       0 xe-0/0/46.0
T2             00:19:e2:50:7d:e0 Static      - Router
T3             *          Flood        - All-members
T3             00:00:5e:00:01:02 Static      - Router
T3             00:19:e2:50:63:e0 Learn       0 xe-0/0/46.0
T3             00:19:e2:50:7d:e0 Static      - Router
T4             *          Flood        - All-members
T4             00:00:5e:00:01:03 Static      - Router
T4             00:19:e2:50:63:e0 Learn       0 xe-0/0/46.0
[output truncated]

```

#### show ethernet-switching table detail

```

user@switch> show ethernet-switching table detail
Ethernet-switching table: 57 entries, 17 learned
F2, *
  Interface(s): xe-0/0/44.0
  Type: Flood
  Nexthop index: 0

F2, 00:00:05:00:00:03
  Interface(s): xe-0/0/44.0
  Type: Learn, Age: 0, Learned: 2:03:09
  Nexthop index: 0

F2, 00:19:e2:50:7d:e0
  Interface(s): Router
  Type: Static
  Nexthop index: 0

Linux, *
  Interface(s): xe-0/0/47.0
  Type: Flood
  Nexthop index: 0

Linux, 00:19:e2:50:7d:e0
  Interface(s): Router
  Type: Static
  Nexthop index: 0

Linux, 00:30:48:90:54:89
  Interface(s): xe-0/0/47.0
  Type: Learn, Age: 0, Learned: 2:03:08
  Nexthop index: 0

T1, *

```



```

Interface(s): xe-0/0/46.0
Type: Flood
Nexthop index: 0

T1, 00:00:05:00:00:01
Interface(s): xe-0/0/46.0
Type: Learn, Age: 0, Learned: 2:03:07
Nexthop index: 0

T1, 00:00:5e:00:01:00
Interface(s): Router
Type: Static
Nexthop index: 0

T1, 00:19:e2:50:63:e0
Interface(s): xe-0/0/46.0
Type: Learn, Age: 0, Learned: 2:03:07
Nexthop index: 0

T1, 00:19:e2:50:7d:e0
Interface(s): Router
Type: Static
Nexthop index: 0

T10, *
Interface(s): xe-0/0/46.0
Type: Flood
Nexthop index: 0

T10, 00:00:5e:00:01:09
Interface(s): Router
Type: Static
Nexthop index: 0

T10, 00:19:e2:50:63:e0
Interface(s): xe-0/0/46.0
Type: Learn, Age: 0, Learned: 2:03:08
Nexthop index: 0

T10, 00:19:e2:50:7d:e0
Interface(s): Router
Type: Static
Nexthop index: 0

T111, *
Interface(s): xe-0/0/15.0
Type: Flood
Nexthop index: 0
[output truncated]

```

**show**  
**ethernet-switching**  
**table extensive**

```

user@switch> show ethernet-switching table extensive
Ethernet-switching table: 57 entries, 17 learned
F2, *
Interface(s): xe-0/0/44.0
Type: Flood
Nexthop index: 0

F2, 00:00:05:00:00:03
Interface(s): xe-0/0/44.0
Type: Learn, Age: 0, Learned: 2:03:09
Nexthop index: 0

```



```
F2, 00:19:e2:50:7d:e0
  Interface(s): Router
  Type: Static
  Nexthop index: 0

Linux, *
  Interface(s): xe-0/0/47.0
  Type: Flood
  Nexthop index: 0

Linux, 00:19:e2:50:7d:e0
  Interface(s): Router
  Type: Static
  Nexthop index: 0

Linux, 00:30:48:90:54:89
  Interface(s): xe-0/0/47.0
  Type: Learn, Age: 0, Learned: 2:03:08
  Nexthop index: 0

T1, *
  Interface(s): xe-0/0/46.0
  Type: Flood
  Nexthop index: 0

T1, 00:00:05:00:00:01
  Interface(s): xe-0/0/46.0
  Type: Learn, Age: 0, Learned: 2:03:07
  Nexthop index: 0

T1, 00:00:5e:00:01:00
  Interface(s): Router
  Type: Static
  Nexthop index: 0

T1, 00:19:e2:50:63:e0
  Interface(s): xe-0/0/46.0
  Type: Learn, Age: 0, Learned: 2:03:07
  Nexthop index: 0

T1, 00:19:e2:50:7d:e0
  Interface(s): Router
  Type: Static
  Nexthop index: 0

T10, *
  Interface(s): xe-0/0/46.0
  Type: Flood
  Nexthop index: 0

T10, 00:00:5e:00:01:09
  Interface(s): Router
  Type: Static
  Nexthop index: 0

T10, 00:19:e2:50:63:e0
  Interface(s): xe-0/0/46.0
  Type: Learn, Age: 0, Learned: 2:03:08
  Nexthop index: 0
```



```
T10, 00:19:e2:50:7d:e0
Interface(s): Router
Type: Static
Nexthop index: 0

T111, *
Interface(s): xe-0/0/15.0
Type: Flood
Nexthop index: 0
[output truncated]
```

**show  
ethernet-switching  
table interface**

```
user@switch> show ethernet-switching table interface xe-0/0/1
Ethernet-switching table: 1 unicast entries
VLAN      MAC address      Type      Age Interfaces
V1        *                Flood     - All-members
V1        00:00:05:00:00:05 Learn     0 xe-0/0/1.0
```



## show interfaces xe

---

<b>Syntax</b>	<code>show interfaces <i>device-name:type-fpc/pic/port</i></code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;descriptions&gt;</code> <code>&lt;media&gt;</code> <code>&lt;routing-instance (all   <i>instance-name</i>)&gt;</code> <code>&lt;snmp-index <i>snmp-index</i>&gt;</code> <code>&lt;statistics&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display status information about the specified 10-Gigabit Ethernet interface. This command does not display statistics for routed VLAN interfaces.
<b>Options</b>	<p><b><i>device-name:type-fpc/pic/port</i></b>—(QFabric systems only) The device name is either the serial number or the alias of the QFabric system component, such as a Node device, Interconnect device, or QFabric infrastructure. The name must contain a maximum of 128 characters and not contain any colons.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>routing-instance (all   <i>instance-name</i>)</b>—(Optional) Display the name of an individual routing instance or display all routing instances.</p> <p><b>snmp-index <i>snmp-index</i></b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Monitoring Interface Status and Traffic on page 279</a></li><li>• <a href="#">Troubleshooting Network Interfaces on page 1106</a></li><li>• <a href="#">Troubleshooting an Aggregated Ethernet Interface on page 1107</a></li><li>• Junos® OS Network Interfaces</li></ul>
<b>List of Sample Output</b>	<a href="#">show interfaces on page 1727</a> <a href="#">show interfaces (Asymmetric Flow Control) on page 1727</a> <a href="#">show interfaces brief on page 1727</a> <a href="#">show interfaces detail on page 1728</a> <a href="#">show interfaces detail (Asymmetric Flow Control) on page 1729</a> <a href="#">show interfaces extensive on page 1730</a> <a href="#">show interfaces extensive (Asymmetric Flow Control) on page 1732</a>



[show interfaces terse on page 1734](#)

[show interfaces \(QFabric System\) on page 1735](#)

**Output Fields** Table 134 on page 1719 lists the output fields for the **show interfaces xe** command. Output fields are listed in the approximate order in which they appear.

**Table 134: show interfaces xe Output Fields**

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		
<b>Physical interface</b>	Name of the physical interface.	All levels
<b>Enabled</b>	State of the interface.	All levels
<b>Interface index</b>	Index number of the physical interface, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	SNMP index number for the physical interface.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Link-level type</b>	Encapsulation being used on the physical interface.	All levels
<b>MTU</b>	Maximum transmission unit size on the physical interface.	All levels
<b>Speed</b>	Speed at which the interface is running.	All levels
<b>Duplex</b>	Duplex mode of the interface, either <b>Full-Duplex</b> or <b>Half-Duplex</b> .	All levels
<b>Loopback</b>	Loopback status: <b>Enabled</b> or <b>Disabled</b> . If loopback is enabled, type of loopback: <b>Local</b> or <b>Remote</b> .	All levels
<b>Source filtering</b>	Source filtering status: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>LAN-PHY mode</b>	10-Gigabit Ethernet interface operating in Local Area Network Physical Layer Device (LAN PHY) mode. LAN PHY allows 10-Gigabit Ethernet wide area links to use existing Ethernet applications.	All levels
<b>Unidirectional</b>	Unidirectional link mode status for 10-Gigabit Ethernet interface: <b>Enabled</b> or <b>Disabled</b> for parent interface; <b>Rx-only</b> or <b>Tx-only</b> for child interfaces.	All levels
<b>Flow control</b>	Flow control status: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>NOTE:</b> This field is only displayed if asymmetric flow control is not configured.		



Table 134: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Configured-flow-control</b>	<p>Configured flow control for the interface transmit buffers (<b>tx-buffers</b>) and receive buffers (<b>rx-buffers</b>):</p> <ul style="list-style-type: none"> <li><b>tx-buffers</b>—<b>On</b> if the interface is configured to respond to Ethernet PAUSE messages received from the connected peer. <b>Off</b> if the interface is not configured to respond to received PAUSE messages.</li> <li><b>rx-buffers</b>—<b>On</b> if the interface is configured to generate and send Ethernet PAUSE messages to the connected peer. <b>Off</b> if the interface is not configured to generate and send PAUSE messages.</li> </ul> <p><b>NOTE:</b> This field is only displayed if asymmetric flow control is configured.</p>	All levels
<b>Auto-negotiation</b>	Autonegotiation status: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>Remote-fault</b>	<p>Remote fault status:</p> <ul style="list-style-type: none"> <li><b>Online</b>—Autonegotiation is manually configured as online.</li> <li><b>Offline</b>—Autonegotiation is manually configured as offline.</li> </ul>	All levels
<b>Device flags</b>	Information about the physical device.	All levels
<b>Interface flags</b>	Information about the interface.	All levels
<b>Link flags</b>	Information about the link.	All levels
<b>Wavelength</b>	Configured wavelength, in nanometers (nm).	All levels
<b>Frequency</b>	Frequency associated with the configured wavelength, in terahertz (THz).	All levels
<b>CoS queues</b>	Number of CoS queues configured.	<b>detail extensive none</b>
<b>Schedulers</b>	Number of CoS schedulers configured.	<b>extensive</b>
<b>Hold-times</b>	Current interface hold-time up and hold-time down, in milliseconds.	<b>detail extensive</b>
<b>Current address</b>	Configured MAC address.	<b>detail extensive none</b>
<b>Hardware address</b>	Hardware MAC address.	<b>detail extensive none</b>
<b>Last flapped</b>	Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: year-month-day hour:minute:second:timezone (hour:minute:second ago)</b> . For example, <b>Last flapped: 2008-01-16 10:52:40 UTC (3d 22:58 ago)</b> .	<b>detail extensive none</b>
<b>Input Rate</b>	Input rate in bits per second (bps) and packets per second (pps).	None specified
<b>Output Rate</b>	Output rate in bps and pps.	None specified
<b>Statistics last cleared</b>	Time when the statistics for the interface were last set to zero.	<b>detail extensive</b>



Table 134: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Traffic statistics</b>	<p>Number and rate of bytes and packets received and transmitted on the physical interface.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul> <p><b>NOTE:</b> The bandwidth bps counter is not enabled.</p>	<b>detail extensive</b>
<b>Input errors</b>	<p>Input errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Errors</b>—Sum of the incoming frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the input queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Framing errors</b>—Number of packets received with an invalid frame checksum (FCS).</li> <li>• <b>Runts</b>—Number of frames received that are smaller than the runt threshold.</li> <li>• <b>Policed discards</b>—Number of frames that the incoming packet match code discarded because they were not recognized or not of interest. Usually, this field reports protocols that Junos OS does not handle.</li> <li>• <b>L3 incompletes</b>—Number of incoming packets discarded because they failed Layer 3 sanity checks of the header. For example, a frame with less than 20 bytes of available IP header is discarded. L3 incomplete errors can be ignored if you configure the <b>ignore-l3-incompletes</b> statement.</li> <li>• <b>L2 channel errors</b>—Number of times the software did not find a valid logical interface for an incoming frame.</li> <li>• <b>L2 mismatch timeouts</b>—Number of malformed or short packets that caused the incoming packet handler to discard the frame as unreadable.</li> <li>• <b>FIFO errors</b>—Number of FIFO errors in the receive direction that are reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>



Table 134: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Output errors</b>	<p>Output errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Carrier transitions</b>—Number of times the interface has gone from <b>down</b> to <b>up</b>. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and then up, or another problem occurs. If the number of carrier transitions increments quickly (perhaps once every 10 seconds), the cable, the far-end system, or the PIC or PIM is malfunctioning.</li> <li>• <b>Errors</b>—Sum of the outgoing frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Collisions</b>—Number of Ethernet collisions. The Gigabit Ethernet PIC supports only full-duplex operation, so for Gigabit Ethernet PICs, this number should always remain 0. If it is nonzero, there is a software bug.</li> <li>• <b>Aged packets</b>—Number of packets that remained in shared packet SDRAM so long that the system automatically purged them. The value in this field should never increment. If it does, it is most likely a software bug or possibly malfunctioning hardware.</li> <li>• <b>FIFO errors</b>—Number of FIFO errors in the send direction as reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>• <b>HS link CRC errors</b>—Number of errors on the high-speed links between the ASICs responsible for handling the router interfaces.</li> <li>• <b>MTU errors</b>—Number of packets whose size exceeded the MTU of the interface.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>
<b>Egress queues</b>	Total number of egress queues supported on the specified interface.	<b>detail extensive</b>
<b>Queue counters (Egress)</b>	<p>CoS queue number and its associated user-configured forwarding class name.</p> <ul style="list-style-type: none"> <li>• <b>Queued packets</b>—Number of queued packets.</li> <li>• <b>Transmitted packets</b>—Number of transmitted packets.</li> <li>• <b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>	<b>detail extensive</b>
<b>Queue Number</b>	The CoS queue number and the forwarding classes mapped to the queue number. The <b>Mapped forwarding class</b> column lists the forwarding classes mapped to each CoS queue.	<b>detail extensive</b>
<b>Ingress queues</b>	Total number of ingress queues supported on the specified interface.	<b>extensive</b>
<b>Queue counters (Ingress)</b>	<p>CoS queue number and its associated user-configured forwarding class name.</p> <ul style="list-style-type: none"> <li>• <b>Queued packets</b>—Number of queued packets.</li> <li>• <b>Transmitted packets</b>—Number of transmitted packets.</li> <li>• <b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>	<b>extensive</b>



Table 134: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Active alarms and Active defects</b>	<p>Ethernet-specific defects that can prevent the interface from passing packets. When a defect persists for a certain amount of time, it is promoted to an alarm. Based on the switch configuration, an alarm can ring the red or yellow alarm bell on the switch, or turn on the red or yellow alarm LED on the craft interface. These fields can contain the value <b>None</b> or <b>Link</b>.</p> <ul style="list-style-type: none"> <li>• <b>None</b>—There are no active defects or alarms.</li> <li>• <b>Link</b>—Interface has lost its link state, which usually means that the cable is unplugged, the far-end system has been turned off, or the PIC is malfunctioning.</li> </ul>	<b>detail extensive none</b>
<b>PCS statistics</b>	Physical Coding Sublayer (PCS) fault conditions from the LAN PHY device.	<b>detail extensive</b>
<b>MAC statistics</b>	<p>Receive and Transmit statistics reported by the PIC's MAC subsystem.</p> <ul style="list-style-type: none"> <li>• <b>Total octets and total packets</b>—Total number of octets and packets. For Gigabit Ethernet IQ PICs, the received octets count varies by interface type.</li> <li>• <b>Unicast packets, Broadcast packets, and Multicast packets</b>—Number of unicast, broadcast, and multicast packets.</li> <li>• <b>CRC/Align errors</b>—Total number of packets received that had a length (excluding framing bits, but including FCS octets) of between 64 and 1518 octets, inclusive, and had either a bad FCS with an integral number of octets (FCS Error) or a bad FCS with a nonintegral number of octets (Alignment Error).</li> <li>• <b>FIFO error</b>—Number of FIFO errors that are reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>• <b>MAC control frames</b>—Number of MAC control frames.</li> <li>• <b>MAC pause frames</b>—Number of MAC control frames with <b>pause</b> operational code.</li> <li>• <b>Oversized frames</b>—Number of packets that exceeds the configured MTU.</li> <li>• <b>Jabber frames</b>—Number of frames that were longer than 1518 octets (excluding framing bits, but including FCS octets), and had either an FCS error or an alignment error. This definition of jabber is different from the definition in IEEE-802.3 section 8.2.1.5 (10BASE5) and section 10.3.1.4 (10BASE2). These documents define jabber as the condition in which any packet exceeds 20 ms. The allowed range to detect jabber is from 20 ms to 150 ms.</li> <li>• <b>Fragment frames</b>—Total number of packets that were less than 64 octets in length (excluding framing bits, but including FCS octets), and had either an FCS error or an alignment error. Fragment frames normally increment because both runs (which are normal occurrences caused by collisions) and noise hits are counted.</li> <li>• <b>VLAN tagged frames</b>—Number of frames that are VLAN tagged. The system uses the TPID of 0x8100 in the frame to determine whether a frame is tagged or not. This counter is not supported on EX Series switches and is always displayed as 0.</li> <li>• <b>Code violations</b>—Number of times an event caused the PHY to indicate "Data reception error" or "invalid data symbol error."</li> </ul>	<b>extensive</b>
<b>Filter statistics</b>	Receive and Transmit statistics reported by the PIC's MAC address filter subsystem.	<b>extensive</b>



Table 134: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
Autonegotiation information	<p>Information about link autonegotiation.</p> <ul style="list-style-type: none"> <li>• <b>Negotiation status:</b> <ul style="list-style-type: none"> <li>• <b>Incomplete</b>—Ethernet interface has the speed or link mode configured.</li> <li>• <b>No autonegotiation</b>—Remote Ethernet interface has the speed or link mode configured, or does not perform autonegotiation.</li> <li>• <b>Complete</b>—Ethernet interface is connected to a device that performs autonegotiation and the autonegotiation process is successful.</li> </ul> </li> <li>• <b>Link partner status</b>—OK when the Ethernet interface is connected to a device that performs autonegotiation and the autonegotiation process is successful.</li> <li>• <b>Link partner:</b> <ul style="list-style-type: none"> <li>• <b>Link mode</b>—Depending on the capability of the attached Ethernet device, either <b>Full-duplex</b> or <b>Half-duplex</b>.</li> <li>• <b>Flow control</b>—Types of flow control supported by the remote Ethernet device. For Fast Ethernet interfaces, the type is <b>None</b>. For Gigabit Ethernet interfaces, types are <b>Symmetric</b> (link partner supports <b>PAUSE</b> on receive and transmit), <b>Asymmetric</b> (link partner supports <b>PAUSE</b> on transmit), and <b>Symmetric/Asymmetric</b> (link partner supports both <b>PAUSE</b> on receive and transmit or only <b>PAUSE</b> receive).</li> <li>• <b>Remote fault</b>—Remote fault information from the link partner—<b>Failure</b> indicates a receive link error. <b>OK</b> indicates that the link partner is receiving. <b>Negotiation error</b> indicates a negotiation error. <b>Offline</b> indicates that the link partner is going offline.</li> </ul> </li> <li>• <b>Local resolution:</b> <ul style="list-style-type: none"> <li>• <b>Flow control</b>—Types of flow control supported by the remote Ethernet device. For Gigabit Ethernet interfaces, types are <b>Symmetric</b> (link partner supports <b>PAUSE</b> on receive and transmit), <b>Asymmetric</b> (link partner supports <b>PAUSE</b> on transmit), and <b>Symmetric/Asymmetric</b> (link partner supports both <b>PAUSE</b> on receive and transmit or only <b>PAUSE</b> receive). For asymmetric <b>PAUSE</b>, shows if the <b>PAUSE</b> transmit and <b>PAUSE</b> receive states on the interface are <b>enable</b> or <b>disable</b>.</li> <li>• <b>Remote fault</b>—Remote fault information. <b>Link OK</b> (no error detected on receive), <b>Offline</b> (local interface is offline), and <b>Link Failure</b> (link error detected on receive).</li> </ul> </li> </ul>	extensive



Table 134: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Packet Forwarding Engine configuration</b>	Information about the configuration of the Packet Forwarding Engine: <ul style="list-style-type: none"> <li><b>Destination slot</b>—FPC slot number.</li> <li><b>CoS transmit queue</b>—Queue number and its associated user-configured forwarding class name.</li> <li><b>Bandwidth %</b>—Percentage of bandwidth allocated to the queue.</li> <li><b>Bandwidth bps</b>—Bandwidth allocated to the queue (in bps).</li> <li><b>Buffer %</b>—Percentage of buffer space allocated to the queue.</li> <li><b>Buffer usec</b>—Amount of buffer space allocated to the queue, in microseconds. This value is nonzero only if the buffer size is configured in terms of time.</li> <li><b>Priority</b>—Queue priority: <b>low</b> or <b>high</b>.</li> <li><b>Limit</b>—Displayed if rate limiting is configured for the queue. Possible values are <b>none</b> and <b>exact</b>. If <b>exact</b> is configured, the queue transmits only up to the configured bandwidth, even if excess bandwidth is available. If <b>none</b> is configured, the queue transmits beyond the configured bandwidth if bandwidth is available.</li> </ul>	<b>extensive</b>
<b>Logical Interface</b>		
<b>Logical interface</b>	Name of the logical interface.	All levels
<b>Index</b>	Index number of the logical interface, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	SNMP interface index number for the logical interface.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Flags</b>	Information about the logical interface.	All levels
<b>Encapsulation</b>	Encapsulation on the logical interface.	All levels
<b>Protocol</b>	Protocol family.	<b>detail extensive none</b>
<b>Traffic statistics</b>	Number and rate of bytes and packets received (input) and transmitted (output) on the specified interface.	<b>detail extensive</b>
<b>IPv6 transit statistics</b>	If IPv6 statics tracking is enabled, number of IPv6 bytes and packets received and transmitted on the logical interface.	<b>extensive</b>
<b>Local statistics</b>	Number and rate of bytes and packets destined to and from the switch.	<b>extensive</b>
<b>Transit statistics</b>	Number and rate of bytes and packets transiting the switch.	<b>extensive</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Route Table</b>	Route table in which the logical interface address is located. For example, <b>0</b> refers to the routing table inet.0.	<b>detail extensive none</b>



Table 134: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Input Filters</b>	Names of any input filters applied to this interface.	<b>detail extensive</b>
<b>Output Filters</b>	Names of any output filters applied to this interface.	<b>detail extensive</b>
<b>Flags</b>	Information about protocol family flags.  If unicast Reverse Path Forwarding (uRPF) is explicitly configured on the specified interface, the uRPF flag appears. If uRPF was configured on a different interface (and therefore is enabled on all switch interfaces) but was not explicitly configured on the specified interface, the uRPF flag does not appear even though uRPF is enabled.	<b>detail extensive</b>
<b>Addresses, Flags</b>	Information about the address flags.	<b>detail extensive none</b>
<i>protocol-family</i>	Protocol family configured on the logical interface. If the protocol is <b>inet</b> , the IP address of the interface is also displayed.	<b>brief</b>
<b>Flags</b>	Information about the address flag.	<b>detail extensive none</b>
<b>Destination</b>	IP address of the remote side of the connection.	<b>detail extensive none</b>
<b>Local</b>	IP address of the logical interface.	<b>detail extensive none</b>
<b>Broadcast</b>	Broadcast address of the logical interlace.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>



## Sample Output

### show interfaces

```
user@switch> show interfaces xe-0/0/1
Physical interface: xe-0/0/1, Enabled, Physical link is Up
  Interface index: 49195, SNMP ifIndex: 591
  Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled,
    Flow control: Disabled
    Device flags   : Present Running
    Interface flags: SNMP-Traps Internal: 0x0
    Link flags     : None
    CoS queues     : 12 supported, 12 maximum usable queues
    Current address: 00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1
    Last flapped   : 2011-06-01 00:42:03 PDT (00:02:42 ago)
    Input rate     : 0 bps (0 pps)
    Output rate    : 0 bps (0 pps)
    Active alarms  : None
    Active defects : None

  Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523)
    Flags: SNMP-Traps 0x0 Encapsulation: ENET2
    Input packets : 0
    Output packets: 0
    Protocol eth-switch, MTU: 0
    Flags: Trunk-Mode
```

### show interfaces (Asymmetric Flow Control)

```
user@switch> show interfaces xe-0/0/1
Physical interface: xe-0/0/1, Enabled, Physical link is Up
  Interface index: 49195, SNMP ifIndex: 591
  Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled,
    Configured-flow-control tx-buffers: off rx-buffers: on
    Device flags   : Present Running
    Interface flags: SNMP-Traps Internal: 0x0
    Link flags     : None
    CoS queues     : 12 supported, 12 maximum usable queues
    Current address: 00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1
    Last flapped   : 2011-06-01 00:42:03 PDT (00:02:42 ago)
    Input rate     : 0 bps (0 pps)
    Output rate    : 0 bps (0 pps)
    Active alarms  : None
    Active defects : None

  Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523)
    Flags: SNMP-Traps 0x0 Encapsulation: ENET2
    Input packets : 0
    Output packets: 0
    Protocol eth-switch, MTU: 0
    Flags: Trunk-Mode
```

### show interfaces brief

```
user@switch> show interfaces xe-0/0/1 brief
Physical interface: xe-0/0/1, Enabled, Physical link is Up
  Link-level type: Ethernet, MTU: 1514, Speed: 1000mbps, Loopback: Disabled,
  Source filtering: Disabled, Flow control: Enabled
```



```

Device flags   : Present Running
Interface flags: SNMP-Traps Internal: 0x0
Link flags     : None

```

```

Logical interface xe-0/0/1.0
  Flags: SNMP-Traps Encapsulation: ENET2
  eth-switch

```

### show interfaces detail

```

user@switch> show interfaces xe-0/0/1 detail
Physical interface: xe-0/0/1, Enabled, Physical link is Up
  Interface index: 49195, SNMP ifIndex: 591, Generation: 169
  Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled,
  Flow control: Disabled
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x0
  Link flags     : None
  CoS queues     : 12 supported, 12 maximum usable queues
  Hold-times     : Up 0 ms, Down 0 ms
  Current address: 00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1
  Last flapped   : 2011-06-01 00:42:03 PDT (00:02:50 ago)
  Statistics last cleared: 2011-06-01 00:44:39 PDT (00:00:14 ago)
  Traffic statistics:
    Input bytes :          0          0 bps
    Output bytes :          0          0 bps
    Input packets:          0          0 pps
    Output packets:          0          0 pps
  IPv6 transit statistics:
    Input bytes :          0
    Output bytes :          0
    Input packets:          0
    Output packets:          0
  Egress queues: 12 supported, 9 in use
  Queue counters:

```

Queue counters:	Queued packets	Transmitted packets	Dropped packets
0 best-effort	0	0	0
1 fc7	0	0	0
2 no-loss	0	0	0
3 fcoe	0	0	0
4 fc4	0	0	0
5 fc5	0	0	0
6 fc6	0	0	0
7 network-cont	0	0	0
8 mcast	0	0	0

```

  Queue number:      Mapped forwarding classes
    0                best-effort
    1                fc7
    2                no-loss
    3                fcoe
    4                fc4
    5                fc5

```



```

6          fc6
7          network-control
8          mcast
Active alarms : None
Active defects : None

Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523) (Generation 143)
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
Traffic statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Local statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Transit statistics:
  Input bytes : 0 0 bps
  Output bytes : 0 0 bps
  Input packets: 0 0 pps
  Output packets: 0 0 pps
Protocol eth-switch, MTU: 0, Generation: 170, Route table: 0
Flags: Trunk-Mode

```

#### show interfaces detail (Asymmetric Flow Control)

```

user@switch> show interfaces xe-0/0/1 detail
Physical interface: xe-0/0/1, Enabled, Physical link is Up
  Interface index: 49195, SNMP ifIndex: 591, Generation: 169
  Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled,
  Configured-flow-control tx-buffers: off rx-buffers: on
  Device flags : Present Running
  Interface flags: SNMP-Traps Internal: 0x0
  Link flags : None
  CoS queues : 12 supported, 12 maximum usable queues
  Hold-times : Up 0 ms, Down 0 ms
  Current address: 00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1
  Last flapped : 2011-06-01 00:42:03 PDT (00:02:50 ago)
  Statistics last cleared: 2011-06-01 00:44:39 PDT (00:00:14 ago)
Traffic statistics:
  Input bytes : 0 0 bps
  Output bytes : 0 0 bps
  Input packets: 0 0 pps
  Output packets: 0 0 pps
IPv6 transit statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Egress queues: 12 supported, 9 in use
Queue counters:   Queued packets   Transmitted packets   Dropped packets

  0 best-effort           0           0           0

  1 fc7                   0           0           0

  2 no-loss                0           0           0

  3 fcoe                   0           0           0

```



4	fc4	0	0	0
5	fc5	0	0	0
6	fc6	0	0	0
7	network-cont	0	0	0
8	mcast	0	0	0

```

Queue number:      Mapped forwarding classes
0                  best-effort
1                  fc7
2                  no-loss
3                  fcoe
4                  fc4
5                  fc5
6                  fc6
7                  network-control
8                  mcast

```

```

Active alarms : None
Active defects : None

```

Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523) (Generation 143)

Flags: SNMP-Traps 0x0 Encapsulation: ENET2

Traffic statistics:

```

Input bytes :      0
Output bytes :     0
Input packets:     0
Output packets:    0

```

Local statistics:

```

Input bytes :      0
Output bytes :     0
Input packets:     0
Output packets:    0

```

Transit statistics:

```

Input bytes :      0          0 bps
Output bytes :     0          0 bps
Input packets:     0          0 pps
Output packets:    0          0 pps

```

Protocol eth-switch, MTU: 0, Generation: 170, Route table: 0

Flags: Trunk-Mode

## show interfaces extensive

```
user@switch> show interfaces xe-0/0/1 extensive
```

Physical interface: xe-0/0/1, Enabled, Physical link is Up

Interface index: 49195, SNMP ifIndex: 591, Generation: 169

Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU

Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:  
Disabled,

Flow control: Disabled

Device flags : Present Running

Interface flags: SNMP-Traps Internal: 0x0

Link flags : None

CoS queues : 12 supported, 12 maximum usable queues

Hold-times : Up 0 ms, Down 0 ms

Current address: 00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1

Last flapped : 2011-06-01 00:42:03 PDT (00:03:08 ago)

Statistics last cleared: 2011-06-01 00:44:39 PDT (00:00:32 ago)

Traffic statistics:

```

Input bytes :      0          0 bps

```



```

Output bytes :                0                0 bps
Input packets:                0                0 pps
Output packets:               0                0 pps
IPv6 transit statistics:
  Input bytes :                0
  Output bytes :               0
  Input packets:               0
  Output packets:              0
Input errors:
  Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0, L3
incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0, FIFO errors: 0,
Resource errors: 0
Output errors:
  Carrier transitions: 0, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,
FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Egress queues: 12 supported, 9 in use
Queue counters:      Queued packets  Transmitted packets      Dropped packets

  0 best-effort                0                0                0
  1 fc7                        0                0                0
  2 no-loss                    0                0                0
  3 fcoe                       0                0                0
  4 fc4                        0                0                0
  5 fc5                        0                0                0
  6 fc6                        0                0                0
  7 network-cont               0                0                0
  8 mcast                      0                0                0

Queue number:      Mapped forwarding classes
  0                best-effort
  1                fc7
  2                no-loss
  3                fcoe
  4                fc4
  5                fc5
  6                fc6
  7                network-control
  8                mcast
Active alarms : None
Active defects : None
MAC statistics:
Total octets          Receive      Transmit
Total packets         0          0
Unicast packets       0          0
Broadcast packets     0          0
Multicast packets     0          0
CRC/Align errors      0          0
FIFO errors           0          0
MAC control frames    0          0
MAC pause frames      0          0
Oversized frames      0
Jabber frames         0
Fragment frames       0

```



```

VLAN tagged frames          0
Code violations              0
MAC Priority Flow Control Statistics:
  Priority : 0                0          0
  Priority : 1                0          0
  Priority : 2                0          0
  Priority : 3                0          0
  Priority : 4                0          0
  Priority : 5                0          0
  Priority : 6                0          0
  Priority : 7                0          0
Filter statistics:
  Input packet count          0
  Input packet rejects        0
  Input DA rejects            0
  Input SA rejects            0
  Output packet count         0
  Output packet pad count     0
  Output packet error count   0
CAM destination filters: 1, CAM source filters: 0
Packet Forwarding Engine configuration:
  Destination slot: 0
CoS information:
  Direction : Output
  CoS transmit queue          Bandwidth          Buffer Priority
Limit
    0 best-effort             75      75000000000    75          0      low
none
    7 network-control         5       500000000    5           0      low
none
    8 mcast                   20     20000000000   20          0      low
none

Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523) (Generation 143)
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
Traffic statistics:
  Input bytes :               0
  Output bytes :              0
  Input packets:              0
  Output packets:             0
Local statistics:
  Input bytes :               0
  Output bytes :              0
  Input packets:              0
  Output packets:             0
Transit statistics:
  Input bytes :               0          0 bps
  Output bytes :              0          0 bps
  Input packets:              0          0 pps
  Output packets:             0          0 pps
Protocol eth-switch, MTU: 0, Generation: 170, Route table: 0
Flags: Trunk-Mode

```

### show interfaces extensive (Asymmetric Flow Control)

```

user@switch> show interfaces xe-0/0/1 extensive
Physical interface: xe-0/0/1, Enabled, Physical link is Up
  Interface index: 49195, SNMP ifIndex: 591, Generation: 169
  Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled,
  Configured-flow-control tx-buffers: off rx-buffers: on

```



```

Device flags      : Present Running
Interface flags:  SNMP-Traps Internal: 0x0
Link flags       : None
CoS queues       : 12 supported, 12 maximum usable queues
Hold-times       : Up 0 ms, Down 0 ms
Current address:  00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1
Last flapped     : 2011-06-01 00:42:03 PDT (00:03:08 ago)
Statistics last cleared: 2011-06-01 00:44:39 PDT (00:00:32 ago)
Traffic statistics:
  Input bytes      :                0                0 bps
  Output bytes     :                0                0 bps
  Input packets    :                0                0 pps
  Output packets   :                0                0 pps
IPv6 transit statistics:
  Input bytes      :                0
  Output bytes     :                0
  Input packets    :                0
  Output packets   :                0
Input errors:
  Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0, L3
incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0, FIFO errors: 0,
Resource errors: 0
Output errors:
  Carrier transitions: 0, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,
FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Egress queues: 12 supported, 9 in use
Queue counters:      Queued packets  Transmitted packets      Dropped packets

  0 best-effort              0                0                0
  1 fc7                      0                0                0
  2 no-loss                  0                0                0
  3 fcoe                     0                0                0
  4 fc4                      0                0                0
  5 fc5                      0                0                0
  6 fc6                      0                0                0
  7 network-cont             0                0                0
  8 mcast                    0                0                0

Queue number:      Mapped forwarding classes
  0                best-effort
  1                fc7
  2                no-loss
  3                fcoe
  4                fc4
  5                fc5
  6                fc6
  7                network-control
  8                mcast
Active alarms      : None
Active defects     : None
MAC statistics:
  Total octets      Receive      Transmit
  Total packets     0            0

```



```

Unicast packets          0          0
Broadcast packets        0          0
Multicast packets        0          0
CRC/Align errors         0          0
FIFO errors              0          0
MAC control frames       0          0
MAC pause frames         0          0
Oversized frames         0
Jabber frames            0
Fragment frames          0
VLAN tagged frames       0
Code violations           0
MAC Priority Flow Control Statistics:
  Priority : 0            0          0
  Priority : 1            0          0
  Priority : 2            0          0
  Priority : 3            0          0
  Priority : 4            0          0
  Priority : 5            0          0
  Priority : 6            0          0
  Priority : 7            0          0
Filter statistics:
  Input packet count      0
  Input packet rejects    0
  Input DA rejects        0
  Input SA rejects        0
  Output packet count     0
  Output packet pad count 0
  Output packet error count 0
  CAM destination filters: 1, CAM source filters: 0
Packet Forwarding Engine configuration:
  Destination slot: 0
CoS information:
  Direction : Output
  CoS transmit queue      %      Bandwidth      %      Buffer Priority Limit
                           %      bps              %      usec
0 best-effort             75      7500000000    75      0      low  none
7 network-control         5       500000000     5       0      low  none
8 mcast                   20      2000000000    20      0      low  none

Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523) (Generation 143)
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
Traffic statistics:
  Input bytes :          0
  Output bytes :          0
  Input packets:          0
  Output packets:          0
Local statistics:
  Input bytes :          0
  Output bytes :          0
  Input packets:          0
  Output packets:          0
Transit statistics:
  Input bytes :          0          0 bps
  Output bytes :          0          0 bps
  Input packets:          0          0 pps
  Output packets:          0          0 pps
Protocol eth-switch, MTU: 0, Generation: 170, Route table: 0
Flags: Trunk-Mode

```

```
user@switch> show interfaces xe-0/0/1 terse
```



**show interfaces terse**

Interface	Admin	Link	Proto	Local	Remote
xe-0/0/1	up	up			
xe-0/0/1.0	up	up	eth-switch		

**show interfaces  
(QFabric System)**

```
user@switch> show interfaces node1:xe-0/0/0
Physical interface: node1:xe-0/0/0, Enabled, Physical link is Down
  Interface index: 129, SNMP ifIndex: 2884086
  Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None,
  Loopback: Disabled, Source filtering: Disabled, Flow control: Enabled
  Interface flags: Internal: 0x4000
  CoS queues      : 8 supported, 8 maximum usable queues
  Current address: 02:00:09:03:00:00, Hardware address: 02:00:09:03:00:00
  Last flapped   : Never
  Input rate      : 0 bps (0 pps)
  Output rate     : 0 bps (0 pps)
```



## show spanning-tree bridge

<b>Syntax</b>	show spanning-tree bridge <brief   detail> <msti <i>msti-id</i> > <routing-instance <i>routing-instance-name</i> > <vlan-id <i>vlan-id</i> >
<b>Syntax (QFX Series)</b>	show spanning-tree bridge <brief   detail> <msti <i>msti-id</i> > <vlan-id <i>vlan-id</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 8.4. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the configured or calculated Spanning Tree Protocol (STP) parameters.
<b>Options</b>	<p><b>none</b>—(Optional) Display brief STP bridge information for all multiple spanning-tree instances (MSTIs).</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>msti <i>msti-id</i></b>—(Optional) Display STP bridge information for the specified MSTI.</p> <p><b>routing-instance <i>routing-instance-name</i></b>—(Optional) Display STP bridge information for the specified routing instance.</p> <p><b>vlan-id <i>vlan-id</i></b>—(Optional) Display STP bridge information for the specified VLAN.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show spanning-tree bridge routing-instance on page 1738</a> <a href="#">show spanning-tree bridge msti on page 1738</a> <a href="#">show spanning-tree bridge vlan-id (MSTP) on page 1739</a> <a href="#">show spanning-tree bridge (RSTP) on page 1739</a> <a href="#">show spanning-tree bridge vlan-id (RSTP) on page 1740</a>
<b>Output Fields</b>	Table 135 on page 1736 lists the output fields for the <b>show spanning-tree bridge</b> command. Output fields are listed in the approximate order in which they appear.

**Table 135: show spanning-tree bridge Output Fields**

Field Name	Field Description
Routing instance name	Name of the routing instance under which the bridge is configured.
Enabled protocol	Spanning Tree Protocol type enabled.
Root ID	Bridge ID of the elected spanning-tree root bridge. The bridge ID consists of a configurable bridge priority and the MAC address of the bridge.



Table 135: show spanning-tree bridge Output Fields (*continued*)

Field Name	Field Description
<b>Root cost</b>	Calculated cost to reach the root bridge from the bridge where the command is entered.
<b>Root port</b>	Interface that is the current elected root port for this bridge.
<b>CIST regional root</b>	Bridge ID of the elected MSTP regional root bridge.
<b>CIST internal root cost</b>	Calculated cost to reach the regional root bridge from the bridge where the command is entered.
<b>Hello time</b>	Configured number of seconds between transmissions of configuration bridge protocol data units (BPDUs).
<b>Maximum age</b>	Configured maximum expected arrival time of hello bridge protocol data units (BPDUs).
<b>Forward delay</b>	How long an STP bridge port remains in the listening and learning states before transitioning to the forwarding state.
<b>Hop count</b>	Configured maximum number of hops a BPDUs can be forwarded in the MSTP region.
<b>Message age</b>	Number of elapsed seconds since the most recent BPDUs was received.
<b>Number of topology changes</b>	Total number of STP topology changes detected since the routing device last booted.
<b>Time since last topology change</b>	Number of elapsed seconds since the most recent topology change.
<b>Bridge ID (Local)</b>	Locally configured bridge ID. The bridge ID consists of a configurable bridge priority and the MAC address of the bridge.
<b>Extended system ID</b>	System identifier.
<b>MSTI regional root</b>	Bridge ID of the elected MSTP regional root bridge.



## Sample Output

**show spanning-tree  
bridge routing-instance**

```
user@host> show spanning-tree bridge routing-instance vs1 detail
STP bridge parameters
Routing instance name           : vs1
Enabled protocol                : MSTP

STP bridge parameters for CIST
Root ID                        : 32768.00:13:c3:9e:c8:80
Root cost                      : 0
Root port                      : ge-10/2/0
CIST regional root             : 32768.00:13:c3:9e:c8:80
CIST internal root cost        : 22000
Hello time                     : 2 seconds
Maximum age                    : 20 seconds
Forward delay                   : 15 seconds
Hop count                      : 18
Message age                    : 0
Number of topology changes     : 1
Time since last topology change : 1191 seconds
Local parameters
  Bridge ID                    : 32768.00:90:69:0b:7f:d1
  Extended system ID           : 1

STP bridge parameters for MSTI 1
MSTI regional root             : 32769.00:13:c3:9e:c8:80
Root cost                      : 22000
Root port                      : ge-10/2/0
Hello time                     : 2 seconds
Maximum age                    : 20 seconds
Forward delay                   : 15 seconds
Hop count                      : 18
Number of topology changes     : 1
Time since last topology change : 1191 seconds
Local parameters
  Bridge ID                    : 32769.00:90:69:0b:7f:d1
  Extended system ID           : 1

STP bridge parameters for MSTI 2
MSTI regional root             : 32770.00:13:c3:9e:c8:80
Root cost                      : 22000
Root port                      : ge-10/2/0
Hello time                     : 2 seconds
Maximum age                    : 20 seconds
Forward delay                   : 15 seconds
Hop count                      : 18
Number of topology changes     : 1
Time since last topology change : 1191 seconds
Local parameters
  Bridge ID                    : 32770.00:90:69:0b:7f:d1
  Extended system ID           : 1
```

**show spanning-tree  
bridge msti**

```
user@host> show spanning-tree bridge msti 1 routing-instance vs1 detail
STP bridge parameters
Routing instance name           : vs1
Enabled protocol                : MSTP

STP bridge parameters for MSTI 1
MSTI regional root             : 32769.00:13:c3:9e:c8:80
```



```

Root cost                : 22000
Root port                : xe-10/2/0
Hello time               : 2 seconds
Maximum age              : 20 seconds
Forward delay            : 15 seconds
Hop count                : 18
Number of topology changes : 1
Time since last topology change : 1191 seconds
Local parameters
  Bridge ID              : 32769.00:90:69:0b:7f:d1
  Extended system ID     : 1

```

### show spanning-tree bridge vlan-id (MSTP)

```
user@host> show spanning-tree bridge vlan-id 1101 routing-instance vs1 detail
```

```

STP bridge parameters
Routing instance name    : vs1
Enabled protocol        : MSTP

STP bridge parameters for CIST
Root ID                  : 32768.00:13:c3:9e:c8:80
Root cost                : 0
Root port                : xe-10/2/0
CIST regional root      : 32768.00:13:c3:9e:c8:80
CIST internal root cost : 22000
Hello time               : 2 seconds
Maximum age              : 20 seconds
Forward delay            : 15 seconds
Hop count                : 18
Message age              : 0
Number of topology changes : 0
Local parameters
  Bridge ID              : 32768.00:90:69:0b:7f:d1
  Extended system ID     : 1
  Hello time             : 2 seconds
  Maximum age            : 20 seconds
  Forward delay          : 15 seconds
  Path cost method       : 32 bit
  Maximum hop count      : 20

```

### show spanning-tree bridge (RSTP)

```
user@host> show spanning-tree bridge
```

```

STP bridge parameters
Routing instance name    : GLOBAL
Enabled protocol        : RSTP
Root ID                  : 28672.00:90:69:0b:3f:d0
Hello time               : 2 seconds
Maximum age              : 20 seconds
Forward delay            : 15 seconds
Message age              : 0
Number of topology changes : 58
Time since last topology change : 14127 seconds
Local parameters
  Bridge ID              : 28672.00:90:69:0b:3f:d0
  Extended system ID     : 0

STP bridge parameters for bridge VLAN 10
Root ID                  : 28672.00:90:69:0b:3f:d0
Hello time               : 2 seconds
Maximum age              : 20 seconds
Forward delay            : 15 seconds
Message age              : 0
Number of topology changes : 58

```



```
Time since last topology change : 14127 seconds
Local parameters
  Bridge ID                      : 28672.00:90:69:0b:3f:d0
  Extended system ID             : 0

STP bridge parameters for bridge VLAN 20
  Root ID                       : 28672.00:90:69:0b:3f:d0
  Hello time                     : 2 seconds
  Maximum age                    : 20 seconds
  Forward delay                  : 15 seconds
  Message age                    : 0
  Number of topology changes     : 58
  Time since last topology change : 14127 seconds
Local parameters
  Bridge ID                      : 28672.00:90:69:0b:3f:d0
  Extended system ID             : 0
```

**show spanning-tree  
bridge vlan-id (RSTP)**

```
user@host> show spanning-tree bridge vlan-id 10
STP bridge parameters
Routing instance name           : GLOBAL
Enabled protocol                 : RSTP

STP bridge parameters for VLAN 10
  Root ID                       : 28672.00:90:69:0b:3f:d0
  Hello time                     : 2 seconds
  Maximum age                    : 20 seconds
  Forward delay                  : 15 seconds
  Message age                    : 0
  Number of topology changes     : 58
  Time since last topology change : 14127 seconds
Local parameters
  Bridge ID                      : 28672.00:90:69:0b:3f:d0
  Extended system ID             : 0
```



## show spanning-tree interface

<b>Syntax</b>	show spanning-tree interface <brief   detail> <msti <i>msti-id</i> > <routing-instance <i>routing-instance-name</i> > <vlan-id <i>vlan-id</i> >
<b>Syntax (EX Series Switches and the QFX Series)</b>	show spanning-tree interface <brief   detail> <msti <i>msti-id</i> > <vlan-id <i>vlan-id</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 8.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the configured or calculated interface-level STP parameters.
<b>Options</b>	<p><b>none</b>—Display brief STP interface information.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>msti <i>msti-id</i></b>—(Optional) Display STP interface information for the specified MST instance.</p> <p><b>routing-instance <i>routing-instance-name</i></b>—(Optional) Display STP interface information for the specified routing instance.</p> <p><b>vlan-id <i>vlan-id</i></b>—(Optional) Display STP interface information for the specified VLAN.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show spanning-tree interface on page 1743</a> <a href="#">show spanning-tree interface (QFX Series) on page 1743</a> <a href="#">show spanning-tree interface detail on page 1744</a> <a href="#">show spanning-tree interface msti on page 1745</a> <a href="#">show spanning-tree interface vlan-id on page 1746</a> <a href="#">show spanning-tree interface (VSTP) on page 1746</a> <a href="#">show spanning-tree interface vlan-id (VSTP) on page 1746</a>
<b>Output Fields</b>	Table 136 on page 1741 lists the output fields for the <b>show spanning-tree interface</b> command. Output fields are listed in the approximate order in which they appear.

**Table 136: show spanning-tree Interface Output Fields**

Field Name	Field Description
<b>Interface name</b>	Interface configured to participate in the STP, RSTP, VSTP, or MSTP instance.



Table 136: show spanning-tree Interface Output Fields (*continued*)

Field Name	Field Description
<b>Port ID</b>	Logical interface identifier configured to participate in the MSTP or VSTP instance.
<b>Designated port ID</b>	Port ID of the designated port for the LAN segment to which this interface is attached.
<b>Designated bridge ID</b>	Bridge ID of the designated bridge for the LAN segment to which this interface is attached.
<b>Port Cost</b>	Configured cost for the interface.
<b>Port State</b>	STP port state: forwarding ( <b>FWD</b> ), blocking ( <b>BLK</b> ), listening, learning, or disabled.
<b>Port Role</b>	MSTP, VSTP, or RSTP port role: designated ( <b>DESG</b> ), backup ( <b>BKUP</b> ), alternate ( <b>ALT</b> ), ( <b>ROOT</b> ), or Root Prevented ( <b>Root-Prev</b> ).
<b>Link type</b>	MSTP, VSTP, or RSTP link type. Shared or point-to-point (pt-pt) and edge or nonedge.
<b>Alternate</b>	Identifies the interface as an MSTP, VSTP, or RSTP alternate root port ( <b>Yes</b> ) or nonalternate root port ( <b>No</b> ).
<b>Boundary Port</b>	Identifies the interface as an MSTP regional boundary port ( <b>Yes</b> ) or nonboundary port ( <b>No</b> ).



## Sample Output

### show spanning-tree interface

```
user@host> show spanning-tree interface routing-instance vs1 detail
```

Spanning tree interface parameters for instance 0

Interface	Port ID	Designated port ID	Designated bridge ID	Port Cost	State	Role
ae1	128:1	128:1	32768.0090690b47d1	1000	FWD	DESG
ge-2/1/2	128:2	128:2	32768.0090690b47d1	20000	FWD	DESG
ge-2/1/5	128:3	128:3	32768.0090690b47d1	29999	FWD	DESG
ge-2/2/1	128:4	128:26	32768.0013c39ec880	20000	FWD	ROOT
xe-9/2/0	128:5	128:5	32768.0090690b47d1	2000	FWD	DESG
xe-9/3/0	128:6	128:6	32768.0090690b47d1	2000	FWD	DESG

Spanning tree interface parameters for instance 1

Interface	Port ID	Designated port ID	Designated bridge ID	Port Cost	State	Role
ae1	128:1	128:1	32769.0090690b47d1	1000	FWD	DESG
ge-2/1/2	128:2	128:2	32769.0090690b47d1	20000	FWD	DESG
ge-2/1/5	128:3	128:3	32769.0090690b47d1	29999	FWD	DESG
ge-2/2/1	128:4	128:26	32769.0013c39ec880	20000	FWD	ROOT
xe-9/2/0	128:5	128:5	32769.0090690b47d1	2000	FWD	DESG
xe-9/3/0	128:6	128:6	32769.0090690b47d1	2000	FWD	DESG

Spanning tree interface parameters for instance 2

Interface	Port ID	Designated port ID	Designated bridge ID	Port Cost	State	Role
ae1	128:1	128:1	32770.0090690b47d1	1000	FWD	DESG
ge-2/1/2	128:2	128:2	32770.0090690b47d1	20000	FWD	DESG
ge-2/1/5	128:3	128:3	32770.0090690b47d1	29999	FWD	DESG
ge-2/2/1	128:4	128:26	32770.0013c39ec880	20000	FWD	ROOT
xe-9/2/0	128:5	128:5	32770.0090690b47d1	2000	FWD	DESG
xe-9/3/0	128:6	128:6	32770.0090690b47d1	2000	FWD	DESG

### show spanning-tree interface (QFX Series)

```
user@1f0> show spanning-tree interface routing-instance vs1 detail
```

Spanning tree interface parameters for instance 0

Interface	Port ID	Designated port ID	Designated bridge ID	Port Cost	State	Role
ae1	128:1	128:1	32768.0090690b47d1	1000	FWD	DESG
ge-2/1/2	128:2	128:2	32768.0090690b47d1	20000	FWD	DESG
ge-2/1/5	128:3	128:3	32768.0090690b47d1	29999	FWD	DESG
ge-2/2/1	128:4	128:26	32768.0013c39ec880	20000	FWD	ROOT
xe-9/2/0	128:5	128:5	32768.0090690b47d1	2000	FWD	DESG
xe-9/3/0	128:6	128:6	32768.0090690b47d1	2000	FWD	DESG

Spanning tree interface parameters for instance 1

Interface	Port ID	Designated port ID	Designated bridge ID	Port Cost	State	Role
ae1	128:1	128:1	32769.0090690b47d1	1000	FWD	DESG
ge-2/1/2	128:2	128:2	32769.0090690b47d1	20000	FWD	DESG
ge-2/1/5	128:3	128:3	32769.0090690b47d1	29999	FWD	DESG
ge-2/2/1	128:4	128:26	32769.0013c39ec880	20000	FWD	ROOT
xe-9/2/0	128:5	128:5	32769.0090690b47d1	2000	FWD	DESG
xe-9/3/0	128:6	128:6	32769.0090690b47d1	2000	FWD	DESG



## Spanning tree interface parameters for instance 2

Interface	Port ID	Designated port ID	Designated bridge ID	Port Cost	State	Role
ae1	128:1	128:1	32770.0090690b47d1	1000	FWD	DESG
ge-2/1/2	128:2	128:2	32770.0090690b47d1	20000	FWD	DESG
ge-2/1/5	128:3	128:3	32770.0090690b47d1	29999	FWD	DESG
ge-2/2/1	128:4	128:26	32770.0013c39ec880	20000	FWD	ROOT
xe-9/2/0	128:5	128:5	32770.0090690b47d1	2000	FWD	DESG
xe-9/3/0	128:6	128:6	32770.0090690b47d1	2000	FWD	DESG

show spanning-tree  
interface detail

user@host&gt; show spanning-tree interface routing-instance vs1 detail

Spanning tree interface parameters for instance 0

```

Interface name           : ae1
Port identifier          : 128.1
Designated port ID      : 128.1
Port cost                : 1000
Port state               : Forwarding
Designated bridge ID     : 32768.00:90:69:0b:47:d1
Port role                : Designated
Link type                : Pt-Pt/NONEDGE
Boundary port           : No

```

```

Interface name           : ge-2/1/2
Port identifier          : 128.2
Designated port ID      : 128.2
Port cost                : 20000
Port state               : Forwarding
Designated bridge ID     : 32768.00:90:69:0b:47:d1
Port role                : Designated
Link type                : Pt-Pt/NONEDGE
Boundary port           : No

```

```

Interface name           : ge-2/1/5
Port identifier          : 128.3
Designated port ID      : 128.3
Port cost                : 29999
Port state               : Forwarding
Designated bridge ID     : 32768.00:90:69:0b:47:d1
Port role                : Designated
Link type                : Pt-Pt/NONEDGE
Boundary port           : No

```

```

Interface name           : ge-2/2/1
Port identifier          : 128.4
Designated port ID      : 128.26
Port cost                : 20000
Port state               : Forwarding
Designated bridge ID     : 32768.00:13:c3:9e:c8:80
Port role                : Root
Link type                : Pt-Pt/NONEDGE
Boundary port           : No

```

```

Interface name           : xe-9/2/0
Port identifier          : 128.5
Designated port ID      : 128.5
Port cost                : 2000
Port state               : Forwarding
Designated bridge ID     : 32768.00:90:69:0b:47:d1
Port role                : Designated

```



```

Link type           : Pt-Pt/NONEDGE
Boundary port       : No

Interface name       : xe-9/3/0
Port identifier      : 128.6
Designated port ID   : 128.6
Port cost            : 2000
Port state           : Forwarding
Designated bridge ID : 32768.00:90:69:0b:47:d1
Port role            : Designated
Link type           : Pt-Pt/NONEDGE
Boundary port       : No

```

#### Spanning tree interface parameters for instance 1

```

Interface name       : ae1
Port identifier      : 128.1
Designated port ID   : 128.1
Port cost            : 1000
Port state           : Forwarding
Designated bridge ID : 32768.00:90:69:0b:47:d1
Port role            : Designated
Link type           : Pt-Pt/NONEDGE
Boundary port       : No

```

```

Interface name       : ge-2/1/2
Port identifier      : 128.2
Designated port ID   : 128.2
Port cost            : 20000
Port state           : Forwarding
Designated bridge ID : 32768.00:90:69:0b:47:d1
Port role            : Designated
Link type           : Pt-Pt/NONEDGE
Boundary port       : No

```

```

Interface name       : ge-2/1/5
Port identifier      : 128.3
Designated port ID   : 128.3
Port cost            : 29999
Port state           : Forwarding
Designated bridge ID : 32768.00:90:69:0b:47:d1
Port role            : Designated
Link type           : Pt-Pt/NONEDGE
Boundary port       : No

```

```

Interface name       : ge-2/2/1
Port identifier      : 128.4
Designated port ID   : 128.26
Port cost            : 20000
Port state           : Forwarding
Designated bridge ID : 32768.00:13:c3:9e:c8:80
Port role            : Root
Link type           : Pt-Pt/NONEDGE
Boundary port       : No

```

...

**show spanning-tree**  
**interface msti**

```

user@host> show spanning-tree interface msti 1 routing-instance vs1 detail
Spanning tree interface parameters for instance 1

```



Interface	Port ID	Designated port ID	Designated bridge ID	Port Cost	State	Role
xe-7/0/0	128:1	128:1	32769.0090690b4fd1	2000	FWD	DESG
ge-5/1/0	128:2	128:2	32769.0090690b4fd1	20000	FWD	DESG
ge-5/1/1	128:3	128:3	32769.0090690b4fd1	20000	FWD	DESG
ae1	128:4	128:1	32769.0090690b47d1	10000	BLK	ALT
ge-5/1/4	128:5	128:3	32769.0090690b47d1	20000	BLK	ALT
xe-7/2/0	128:6	128:6	32769.0090690b47d1	2000	FWD	ROOT

#### show spanning-tree interface vlan-id

user@host> show spanning-tree interface vlan-id 101 routing-instance vs1 detail  
Spanning tree interface parameters for instance 0

Interface	Port ID	Designated port ID	Designated bridge ID	Port Cost	State	Role
ge-11/0/5	128:1	128:1	32768.0090690b7fd1	20000	FWD	DESG
ge-11/0/6	128:2	128:1	32768.0090690b7fd1	20000	BLK	BKUP
ge-11/1/0	128:3	128:2	32768.0090690b4fd1	20000	BLK	ALT
ge-11/1/1	128:4	128:3	32768.0090690b4fd1	20000	BLK	ALT
ge-11/1/4	128:5	128:1	32768.0090690b47d1	20000	BLK	ALT
xe-10/0/0	128:6	128:5	32768.0090690b4fd1	2000	BLK	ALT
xe-10/2/0	128:7	128:4	32768.0090690b47d1	2000	FWD	ROOT

#### show spanning-tree interface (VSTP)

user@host> show spanning-tree interface  
Spanning tree interface parameters for instance 0

Interface	Port ID	Designated port ID	Designated bridge ID	Cost	State	Role
ge-1/0/1	128:1	128:1	28672.0090690b3fe0	20000	FWD	DESG
ge-1/0/2	128:2	128:2	28672.0090690b3fe0	20000	FWD	DESG

Spanning tree interface parameters for VLAN 10

Interface	Port ID	Designated port ID	Designated bridge ID	Cost	State	Role
ge-1/0/1	128:1	128:1	28672.0090690b3fe0	20000	FWD	DESG
ge-1/0/2	128:2	128:2	28672.0090690b3fe0	20000	FWD	DESG

Spanning tree interface parameters for VLAN 20

Interface	Port ID	Designated port ID	Designated bridge ID	Cost	State	Role
ge-1/0/1	128:1	128:1	28672.0090690b3fe0	20000	FWD	DESG
ge-1/0/2	128:2	128:2	28672.0090690b3fe0	20000	FWD	DESG

#### show spanning-tree interface vlan-id (VSTP)

user@host> show spanning-tree interface vlan-id 10  
Spanning tree interface parameters for VLAN 10

Interface	Port ID	Designated port ID	Designated bridge ID	Cost	State	Role
ge-1/0/1	128:1	128:1	28672.0090690b3fe0	20000	FWD	DESG
ge-1/0/2	128:2	128:2	28672.0090690b3fe0	20000	FWD	DESG



## show spanning-tree mstp configuration

<b>Syntax</b>	show spanning-tree mstp configuration <brief   detail> <routing-instance <i>routing-instance-name</i> >
<b>Syntax (EX Series Switch and the QFX Series)</b>	show spanning-tree mstp configuration <brief   detail>
<b>Release Information</b>	Command introduced in Junos OS Release 8.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display the MSTP configuration.
<b>Options</b>	<b>none</b> —Display MSTP configuration information.  <b>brief   detail</b> —(Optional) Display the specified level of output.  <b>routing-instance <i>routing-instance-name</i></b> —(Optional) Display MSTP configuration information for the specified routing instance.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show spanning-tree mstp configuration detail on page 1748</a> <a href="#">show spanning-tree mstp configuration detail (QFX Series) on page 1748</a>
<b>Output Fields</b>	<a href="#">Table 137 on page 1747</a> lists the output fields for the <b>show spanning-tree mstp configuration</b> command. Output fields are listed in the approximate order in which they appear.

**Table 137: show spanning-tree mstp configuration Output Fields**

Field Name	Field Description
<b>Context id</b>	Internally generated identifier.
<b>Region name</b>	MSTP region name carried in the MSTP BPDUs.
<b>Revision</b>	Revision number of the MSTP configuration.
<b>Configuration digest</b>	Numerical value derived from the VLAN-to-instance mapping table.
<b>MSTI</b>	MST instance identifier.
<b>Member VLANs</b>	VLAN identifiers associated with the MSTI.



## Sample Output

**show spanning-tree  
mstp configuration  
detail**

```
user@host> show spanning-tree mstp configuration routing-instance vs1 detail
MSTP configuration information
Context identifier      : 1
Region name            : henry
Revision               : 3
Configuration digest    : 0x6da4b5c4fd587757eef35675365e1
```

```

MSTI      Member VLANs
  0 0-99,101-199,201-4094
  1 100
  2 200
```

**show spanning-tree  
mstp configuration  
detail (QFX Series)**

```
user@1f0> show spanning-tree mstp configuration routing-instance vs1 detail
MSTP configuration information
Context identifier      : 1
Region name            : henry
Revision               : 3
Configuration digest    : 0x6da4b5c4fd587757eef35675365e1
```

```

MSTI      Member VLANs
  0 0-99,101-199,201-4094
  1 100
  2 200
```



## show spanning-tree statistics

<b>Syntax</b>	show spanning-tree statistics <brief   detail> <interface <i>interface-name</i> > <routing-instance <i>routing-instance-name</i> >
<b>Syntax (EX Series Switch and the QFX Series)</b>	show spanning-tree statistics <brief   detail> <interface <i>interface-name</i>   vlan <i>vlan-id</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 8.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for QFX Series switches.
<b>Description</b>	Display STP statistics.
<b>Options</b>	<p><b>none</b>—Display brief STP statistics.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Display STP statistics for the specified interface.</p> <p><b>routing-instance <i>routing-instance-name</i></b>—(Optional) Display STP statistics for the specified routing instance.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show spanning-tree statistics routing-instance on page 1750</a> <a href="#">show spanning-tree statistics interface routing-instance detail on page 1750</a>
<b>Output Fields</b>	Table 138 on page 1749 lists the output fields for the <b>show spanning-tree statistics</b> command. Output fields are listed in the approximate order in which they appear.

**Table 138: show spanning-tree statistics Output Fields**

Field Name	Field Description
<b>Message type</b>	Type of message being counted.
<b>BPDUs sent</b>	Total number of BPDUs sent.
<b>BPDUs received</b>	Total number of BPDUs received.
<b>BPDUs sent in last 5 secs</b>	Number of BPDUs sent in the most recent 5-second period.
<b>BPDUs received in last 5 secs</b>	Number of BPDUs received in the most recent 5-second period.
<b>Interface</b>	Interface for which the statistics are being displayed.



Table 138: show spanning-tree statistics Output Fields (*continued*)

Field Name	Field Description
Next BPDU transmission	Number of seconds until the next BPDU is scheduled to be sent.

## Sample Output

**show spanning-tree  
statistics  
routing-instance**

```
user@host> show spanning-tree statistics routing-instance vs1 detail
Routing instance level STP statistics
Message type           : bpdus
BPDUs sent             : 121
BPDUs received         : 537
BPDUs sent in last 5 secs : 5
BPDUs received in last 5 secs : 27
```

**show spanning-tree  
statistics interface  
routing-instance detail**

```
user@host> show spanning-tree statistics interface ge-11/1/4 routing-instance vs1 detail
Interface  BPDUs sent  BPDUs received  Next BPDU
              transmission
ge-11/1/4      7           190             0
```



## show system statistics arp

<b>Syntax</b>	show system statistics arp
<b>Release Information</b>	Command introduced in Junos OS Release 9.6 for EX Series switches.
<b>Description</b>	Display system-wide Address Resolution Protocol (ARP) statistics.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Proxy ARP on an EX Series Switch</a></li> <li>• <a href="#">Verifying That Proxy ARP Is Working Correctly on page 1683</a></li> </ul>

## Sample Output

```

user@switch> show system statistics arp
arp:
    90060 datagrams received
    34 ARP requests received
    610 ARP replies received
    0 resolution request received
    0 unrestricted proxy requests
    0 restricted proxy requests
    0 received proxy requests
    0 unrestricted proxy requests not proxied
    0 restricted proxy requests not proxied
    0 datagrams with bogus interface
    0 datagrams with incorrect length
    0 datagrams for non-IP protocol
    0 datagrams with unsupported op code
    0 datagrams with bad protocol address length
    0 datagrams with bad hardware address length
    0 datagrams with multicast source address
    0 datagrams with multicast source address
    0 datagrams with my own hardware address
    0 datagrams for an address not on the interface
    0 datagrams with a broadcast source address
    294 datagrams with source address duplicate to mine
    89113 datagrams which were not for me
    0 packets discarded waiting for resolution
    0 packets sent after waiting for resolution
    309 ARP requests sent
    35 ARP replies sent
    0 requests for memory denied
    0 requests dropped on entry
    0 requests dropped during retry
    0 requests dropped due to interface deletion
    0 requests on unnumbered interfaces
    0 new requests on unnumbered interfaces
    0 replies for from unnumbered interfaces
    0 requests on unnumbered interface with non-subnetted donor
    0 replies from unnumbered interface with non-subnetted donor

```



## show vlans

**Syntax** `show vlans`  
`<brief | detail | extensive>`  
`<dot1q-tunneling>`  
`<sort-by (tag | name)>`  
`<vlan-range-name>`

**Release Information** Command introduced in Junos OS Release 11.1 for the QFX Series.  
Option **dot1q-tunneling** added in Junos OS Release 12.1 for the QFX Series.

**Description** Display information about VLANs configured on bridged Ethernet interfaces. For interfaces configured to support a VoIP VLAN and a data VLAN, the **show vlans** command displays both tagged and untagged membership for those VLANs.



**NOTE:** When a series of VLANs is created using the `vlan-range` statement, such VLAN names are preceded and followed by a double underscore. For example, a series of VLANs using the VLAN range 1 through 3 and the base VLAN name `marketing` would be displayed as `__marketing_1__`, `__marketing_2__`, and `__marketing_3__`.



**NOTE:** To display an 802.1X supplicant successfully authenticated in multiple-suppliant mode with dynamic VLAN movement, use the `show vlans vlan-name extensive` operational mode command, where `vlan-name` is the dynamic VLAN.

**Options** **none**—Display information for all VLANs. VLAN information is displayed by VLAN name in ascending order.

**brief | detail | extensive**—(Optional) Display the specified level of output.

**sort-by (tag | name)**—(Optional) Display VLANs in ascending order of VLAN IDs or VLAN names.

**vlan-range-name**—(Optional) Display VLANs in ascending order of VLAN range names.

**Required Privilege Level** `view`

**Related Documentation**

- [Example: Setting Up Basic Bridging and a VLAN on the QFX Series on page 1467](#)
- [Example: Setting Up Bridging with Multiple VLANs on page 1476](#)
- [Understanding Bridging on page 1381](#)
- [show ethernet-switching interfaces on page 1347](#)



**List of Sample Output**

- [show vlans on page 1756](#)
- [show vlans \(Private VLANs\) on page 1756](#)
- [show vlans brief on page 1756](#)
- [show vlans detail on page 1757](#)
- [show vlans extensive \(Port-Based\) on page 1757](#)
- [show vlans \(Q-in-Q Tunneling\) on page 1758](#)
- [show vlans extensive \(Q-in-Q Tunneling\) on page 1758](#)
- [show vlans extensive \(Q-in-Q Tunneling and L2TP\) on page 1759](#)
- [show vlans sort-by tag on page 1759](#)
- [show vlans sort-by name on page 1759](#)
- [show vlans tag on page 1760](#)

**Output Fields** [Table 100 on page 1364](#) lists the output fields for the **show vlans** command. Output fields are listed in the approximate order in which they appear.

**Table 139: show vlans Output Fields**

Field Name	Field Description	Level of Output
<b>Name</b>	Name of a VLAN.	none, <b>brief</b>
<b>Tag</b>	802.1Q tag applied to this VLAN. If <b>none</b> is displayed, no tag is applied.	All levels
<b>Interfaces</b>	Interface associated with learned MAC addresses or <b>All-members</b> option (flood entry). An asterisk (*) beside the interface indicates that the interface is <b>UP</b> .	All levels
<b>Address</b>	IP address.	none, <b>brief</b>
<b>Ports Active /Total</b>	Number of interfaces associated with a VLAN: <b>Active</b> indicates interfaces that are <b>UP</b> , and <b>Total</b> indicates interfaces that are active and inactive.	<b>brief</b>
<b>VLAN</b>	Name of a VLAN.	<b>detail, extensive</b>
<b>Admin state</b>	State of the interface. Values are:  <b>enabled</b> —The interface is turned on, and the physical link is operational and can pass packets.	<b>detail,extensive</b>
<b>MAC learning Status</b>	Indicates if MAC learning is disabled.	<b>detail, extensive</b>
<b>Description</b>	Description for the VLAN.	<b>detail,extensive</b>
<b>Primary IP</b>	Primary IP address associated with a VLAN.	<b>detail</b>
<b>Number of interfaces</b>	Number of interfaces associated with a VLAN. Both the total number of interfaces and the number of active interfaces associated with a VLAN are displayed.	<b>detail, extensive</b>
<b>STP</b>	Spanning tree associated with a VLAN.	<b>detail,extensive</b>
<b>Tagged interfaces</b>	Tagged interfaces with which a VLAN is associated.	<b>detail,extensive</b>



Table 139: show vlans Output Fields (*continued*)

Field Name	Field Description	Level of Output
Untagged interfaces	Untagged interfaces with which a VLAN is associated.	detail, extensive
Dot1q Tunneling Status	Indicates if Q-in-Q tunneling is enabled.	extensive
Customer VLAN ranges	List of customer VLAN (C-VLAN) ranges associated with this service VLAN (S-VLAN).	extensive
Private VLAN Mode	The private VLAN mode for this VLAN. Values include <b>Primary</b> , <b>Isolated</b> , and <b>Community</b> .	extensive
Primary VLAN	Primary VLAN tag for this secondary VLAN.	extensive
Internal Index	VLAN index internal to Junos OS software.	extensive
Origin	Manner in which the VLAN was created: <b>static</b> or <b>learn</b> .	extensive
Protocol	Port-based VLAN or MAC-based VLAN. MAC-based protocol is displayed when VLAN assignment is done either statically or dynamically through 802.1X,	extensive
IP addresses	IP address associated with a VLAN.	extensive
Number of MAC entries	For MAC-based VLANs created either statically or dynamically, the MAC addresses associated with an interface.	extensive
Number of mapping rules	Number of mapping rules for Q-in-Q tunneling ( <b>Push</b> ) and VLAN translation ( <b>Swap</b> ).	
Secondary VLANs	Secondary VLANs associated with a primary VLAN.	extensive
Isolated VLANs	Isolated VLANs associated with a primary VLAN.	extensive
Community VLANs	Community VLANs associated with a primary VLAN.	extensive
VLANs summary	VLAN counts: <ul style="list-style-type: none"> <li>• <b>Total</b>—Total number of VLANs on the switch.</li> <li>• <b>Configured VLANs</b>—Number of VLANs that are based on user-configured settings.</li> <li>• <b>Internal VLANs</b>—Number of VLANs created by the system with no explicit configuration or protocol—for example, the <b>default</b> VLAN and the VLAN created when a trunk interface is not configured with native VLAN membership.</li> <li>• <b>Temporary VLANs</b>—Number of VLANs from the previous configuration that the system retains for a limited time after restart. Temporary VLANs are converted into one of the other types of VLAN, or are removed from the system if the current configuration does not require them.</li> </ul>	All levels



Table 139: show vlans Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Dot1q VLANs summary</b>	802.1Q VLAN counts: <ul style="list-style-type: none"> <li>• <b>Total</b>—Total number of 802.1Q-tagged and untagged VLANs on the switch.</li> <li>• <b>Tagged VLANs</b>—Number of 802.1Q-tagged VLANs.</li> <li>• <b>Untagged VLANs</b>—Number of untagged 802.1Q VLANs.</li> <li>• <b>Private VLAN</b>—Counts of the following kinds of 802.1Q private VLANs (PVLANS):               <ul style="list-style-type: none"> <li>• <b>Primary VLANs</b>—Number of primary forwarding private VLANs.</li> <li>• <b>Community VLANs</b>—Number of community transporting and forwarding private VLANs.</li> <li>• <b>Isolated VLANs</b>—Number of isolated receiving and forwarding private VLANs.</li> <li>• <b>Inter-switch-isolated VLANs</b>—Number of inter-switch isolated receiving and forwarding private VLANs.</li> </ul> </li> </ul>	All levels
<b>Dot1q Tunneled VLANs summary</b>	Q-in-Q-tunneled VLAN counts: <ul style="list-style-type: none"> <li>• <b>Total</b>—Total number of Q-in-Q-tunneled VLANs on the switch.</li> <li>• <b>Private VLAN</b>—Counts of primary, community, and isolated Q-in-Q-tunneled private VLANs (PVLANS).</li> </ul>	All levels



## Sample Output

### show vlans

```
user@switch> show vlans
```

Name	Tag	Interfaces
default	None	xe-0/0/34.0, xe-0/0/33.0, xe-0/0/32.0, xe-0/0/31.0, xe-0/0/30.0, xe-0/0/29.0, xe-0/0/28.0, xe-0/0/27.0, xe-0/0/26.0, xe-0/0/25.0, xe-0/0/19.0, xe-0/0/18.0, xe-0/0/17.0, xe-0/0/16.0, xe-0/0/15.0, xe-0/0/14.0, xe-0/0/13.0, xe-0/0/11.0, xe-0/0/9.0, xe-0/0/8.0, xe-0/0/3.0, xe-0/0/2.0, xe-0/0/1.0
v0001	1	xe-0/0/24.0, xe-0/0/23.0, xe-0/0/22.0, xe-0/0/21.0
v0002	2	None
v0003	3	None
v0004	4	None
v0005	5	None

### show vlans (Private VLANs)

```
user@switch> show vlans
```

Name	Tag	Interfaces
__pvlan_pvlan_xe-0/0/46.0__		xe-0/0/44.0*, xe-0/0/46.0*
c1		xe-0/0/4.0*, xe-0/0/44.0*
c2		xe-0/0/28.0*, xe-0/0/44.0*
default		None
pvlan	500	xe-0/0/4.0*, xe-0/0/28.0*, xe-0/0/44.0*, xe-0/0/46.0*

### show vlans brief

```
user@switch> show vlans brief
```

Name	Tag	Address	Ports Active/Total
default	None		0/23
v0001	1		0/4
v0002	2		0/0
v0003	3		0/0
v0004	4		0/0
v0005	5		0/0
v0006	6		0/0
v0007	7		0/0
v0008	8		0/0
v0009	9		0/0
v0010	10		0/2
v0011	11		0/0
v0012	12		0/0
v0013	13		0/0
v0014	14		0/0
v0015	15		0/0
v0016	16		0/0



**show vlans detail**

```

user@switch> show vlans detail
VLAN: default, Tag: Untagged, Admin state: Enabled
  Description: None
  Primary IP: None, Number of interfaces: 23 (Active = 0)
  STP: None, RTG: None
  Untagged interfaces: xe-0/0/34.0, xe-0/0/33.0, xe-0/0/32.0, xe-0/0/31.0,
xe-0/0/30.0, xe-0/0/29.0, xe-0/0/28.0, xe-0/0/27.0, xe-0/0/26.0,
xe-0/0/25.0, xe-0/0/19.0, xe-0/0/18.0, xe-0/0/17.0, xe-0/0/16.0,
xe-0/0/15.0, xe-0/0/14.0, xe-0/0/13.0, xe-0/0/11.0, xe-0/0/9.0, xe-0/0/8.0,
xe-0/0/3.0, xe-0/0/2.0, xe-0/0/1.0,
  Tagged interfaces: None

VLAN: v0001, Tag: 802.1Q Tag 1, Admin state: Enabled
  Description: None
  Primary IP: None, Number of interfaces: 4 (Active = 0)
  Dot1q Tunneling Status: Enabled
  STP: None, RTG: None
  Untagged interfaces: None
  Tagged interfaces: xe-0/0/24.0, xe-0/0/23.0, xe-0/0/22.0, xe-0/0/21.0,

VLAN: v0002, Tag: 802.1Q Tag 2, Admin state: Enabled
  Description: None
  Primary IP: None, Number of interfaces: 0 (Active = 0)
  STP: None, RTG: None
  Untagged interfaces: None
  Tagged interfaces: None

VLAN: v0003, Tag: 802.1Q Tag 3, Admin state: Enabled
  Description: None
  Primary IP: None, Number of interfaces: 0 (Active = 0)
  STP: None, RTG: None
  Untagged interfaces: None
  Tagged interfaces: None

VLAN: vlan4000, 802.1Q Tag: Untagged, Admin State: Enabled
MAC learning Status: Disabled
Number of interfaces: 0 (Active = 0)

```

**show vlans extensive  
(Port-Based)**

```

user@switch> show vlans extensive
VLAN: default, created at Mon Feb  4 12:13:47 2008
  Tag: None, Internal index: 0, Admin state: Enabled, Origin: static
  Description: None
  Customer VLAN ranges:
    1-4100
  Protocol: Port based
  IP addresses: None
  STP: None, RTG: None.
  Number of interfaces: Tagged 0 (Active = 0), Untagged 23 (Active = 0)
    xe-0/0/34.0 (untagged, access)
    xe-0/0/33.0 (untagged, access)
    xe-0/0/32.0 (untagged, access)
    xe-0/0/31.0 (untagged, access)
    xe-0/0/30.0 (untagged, access)
    xe-0/0/29.0 (untagged, access)
    xe-0/0/28.0 (untagged, access)
    xe-0/0/27.0 (untagged, access)
    xe-0/0/26.0 (untagged, access)
    xe-0/0/25.0 (untagged, access)
    xe-0/0/19.0 (untagged, access)
    xe-0/0/18.0 (untagged, access)

```



```
xe-0/0/17.0 (untagged, access)
xe-0/0/16.0 (untagged, access)
xe-0/0/15.0 (untagged, access)
xe-0/0/14.0 (untagged, access)
xe-0/0/13.0 (untagged, access)
xe-0/0/11.0 (untagged, access)
xe-0/0/9.0 (untagged, access)
xe-0/0/8.0 (untagged, access)
xe-0/0/3.0 (untagged, access)
xe-0/0/2.0 (untagged, access)
xe-0/0/1.0 (untagged, access)
```

Secondary VLANs: Isolated 1, Community 1

Isolated VLANs :

\_\_pvlan\_pvlan\_xe-0/0/3.0\_\_

Community VLANs :

comm1

VLAN: v0001, created at Mon Feb 4 12:13:47 2008

Tag: 1, Internal index: 1, Admin state: Enabled, Origin: static

Description: None

Protocol: Port based, Layer 3 interface: None

IP addresses: None

STP: None, RTG: None.

Number of interfaces: Tagged 4 (Active = 0), Untagged 0 (Active = 0)

xe-0/0/24.0 (tagged, trunk)

xe-0/0/23.0 (tagged, trunk)

xe-0/0/22.0 (tagged, trunk)

xe-0/0/21.0 (tagged, trunk)

VLAN: v0002, created at Mon Feb 4 12:13:47 2008

Tag: 2, Internal index: 2, Admin state: Enabled, Origin: static

Description: None

Protocol: Port based, Layer 3 interface: None

IP addresses: None

STP: None, RTG: None.

Number of interfaces: Tagged 0 (Active = 0), Untagged 0 (Active = 0)

None

VLAN: v0003, created at Mon Feb 4 12:13:47 2008

Tag: 3, Internal index: 3, Admin state: Enabled, Origin: static

Description: None

Protocol: Port based, Layer 3 interface: None

IP addresses: None

STP: None, RTG: None.

Number of interfaces: Tagged 0 (Active = 0), Untagged 0 (Active = 0)

None

### show vlans (Q-in-Q Tunneling)

user@switch> show vlans dot1q-tunneling

Name	Tag	Interfaces
sv100	100	xe-0/0/4.0*, xe-0/0/15.0*

### show vlans extensive (Q-in-Q Tunneling)

user@switch> show vlans sv100 extensive

VLAN: sv100, Created at: Sat Sep 10 12:53:52 2011

802.1Q Tag: 100, Internal index: 2, Admin State: Enabled, Origin: Static

Dot1q Tunneling Status: Enabled

Customer VLAN ranges:

10-20

40-50



```

Protocol: Port Mode
Number of interfaces: Tagged 1 (Active = 1), Untagged 0 (Active = 0)
                      ge-0/0/0.0, tagged, trunk

Number of mapping rules:
  Push 1 (Active = 0), Policy 0 (Active = 0), Swap 0 (Active = 0)

                      xe-0/0/3.0*, 300, push

```

#### show vlans extensive (Q-in-Q Tunneling and L2TP)

```

user@switch> show vlans vl extensive
VLAN: vl, Created at: Fri Mar 2 05:07:38 2012
802.1Q Tag: 100, Internal index: 4, Admin State: Enabled, Origin: Static
Dot1q Tunneling status: Enabled
Layer2 Protocol Tunneling status: Enabled

```

#### show vlans sort-by tag

```

user@switch> show vlans sort-by tag

```

Name	Tag	Interfaces
default		None
__vlan-x_1__	1	None
__vlan-x_2__	2	None
__vlan-x_3__	3	None
__vlan-x_4__	4	None
__vlan-x_5__	5	None
__vlan-x_6__	6	None
__vlan-x_7__	7	None
__vlan-x_8__	8	None
__vlan-x_9__	9	None
__vlan-x_10__	10	None
__vlan-x_11__	11	None
__vlan-x_12__	12	None
__vlan-x_13__	13	None
__vlan-x_14__	14	None
__vlan-x_15__	15	None
__vlan-x_16__	16	None
__vlan-x_17__	17	None
__vlan-x_18__	18	None
__vlan-x_19__	19	None
__vlan-x_20__	20	None



**show vlans sort-by  
name**

```
user@switch> show vlans sort-by employee
```

Name	Tag	Interfaces
__employee_120__	120	
		xe-0/0/22.0*
__employee_121__	121	
		xe-0/0/22.0*
__employee_122__	122	
		xe-0/0/22.0*
__employee_123__	123	
		xe-0/0/22.0*
__employee_124__	124	
		xe-0/0/22.0*
__employee_125__	125	
		xe-0/0/22.0*
__employee_126__	126	
		xe-0/0/22.0*
__employee_127__	127	
		xe-0/0/22.0*
__employee_128__	128	
		xe-0/0/22.0*
__employee_129__	129	
		xe-0/0/22.0*
__employee_130__	130	
		xe-0/0/22.0*

**show vlans tag**

```
user@switch> show vlans employee
```

Name	Tag	Interfaces
__employee_120__	120	
		xe-0/0/22.0*
__employee_121__	121	
		xe-0/0/22.0*
__employee_122__	122	
		xe-0/0/22.0*
__employee_123__	123	
		xe-0/0/22.0*
__employee_124__	124	
		xe-0/0/22.0*
__employee_125__	125	
		xe-0/0/22.0*
__employee_126__	126	
		xe-0/0/22.0*
__employee_127__	127	
		xe-0/0/22.0*
__employee_128__	128	
		xe-0/0/22.0*
__employee_129__	129	
		xe-0/0/22.0*
__employee_130__	130	
		xe-0/0/22.0*



## CHAPTER 18

# Troubleshooting

- [Troubleshooting Procedures on page 1761](#)

## Troubleshooting Procedures

---

- [Troubleshooting Ethernet Switching on page 1761](#)
- [Troubleshooting Layer 2 Protocol Tunneling on page 1762](#)
- [Troubleshooting Private VLANs on page 1763](#)
- [Troubleshooting Q-in-Q and VLAN Translation Configuration on page 1765](#)

## Troubleshooting Ethernet Switching

**Problem** Sometimes a MAC address entry in the switch's Ethernet switching table is not updated after the device with that MAC address has been moved from one interface to another on the switch. Typically, the switch does not wait for a MAC address expiration when a MAC move operation occurs. As soon as the switch detects the MAC address on the new interface, it immediately updates the table. Many network devices send a gratuitous ARP packet when switching an IP address from one device to another. The switch updates its ARP cache table after receipt of such gratuitous ARP messages, and then it also updates its Ethernet switching table.

Sometimes silent devices, such as syslog servers or SNMP trap receivers that receive UDP traffic but do not return acknowledgment (ACK) messages to the traffic source, fail to send gratuitous ARP packets when a device moves. If such a move occurs when the system administrator is not available to explicitly clear the affected interfaces by issuing the **clear ethernet-switching table** command, the entry for the moved device in the Ethernet switching table is not updated.

**Solution** Set up the switch to handle unattended MAC address switchovers.

1. Reduce the system-wide ARP aging timer. (By default, the ARP aging timer is set at 20 minutes. The range of the ARP aging timer is from 1 through 240 minutes.)

```
[edit system arp]
user@switch# set aging-timer 3
```

2. Set the MAC aging timer to the same value as the ARP timer. (By default, the MAC aging timer is set to 300 seconds. The range is 15 to 1,000,000 seconds.)

```
[edit vlans]
user@switch# set vlans sales mac-table-aging-time 180
```



The ARP entry and the MAC address entry for the moved device expire within the times specified by the aging timer values. After the entries expire, the switch sends a new ARP message to the IP address of the device. The device responds to the ARP message, thereby refreshing the entries in the switch's ARP cache table and Ethernet switching table.

- Related Documentation**
- [arp on page 1580](#)
  - [mac-table-aging-time on page 1610](#)

## Troubleshooting Layer 2 Protocol Tunneling

- [Drop Threshold Statistics Might Be Incorrect on page 1762](#)
- [Egress Filtering of L2PT Traffic Not Supported on page 1762](#)

### Drop Threshold Statistics Might Be Incorrect

**Problem** L2PT processing is done by the CPU, and L2PT traffic to the CPU is rate limited to a maximum of 1000 pps. If traffic is received at a rate faster than this limit, the rate limit causes the traffic to be dropped before it hits the threshold and the dropped packets will not be reported in L2PT statistics. This can also occur if you configure a drop threshold that is less than 1000 pps but traffic is received at a faster rate. For example, if you configure a drop threshold of 900 pps and the VLAN receives traffic at rate of 1100 pps, L2PT statistics will show that 100 packets were dropped. The 100 packets dropped because of the rate limit are not reported. Similarly, if you do not configure a drop threshold and the VLAN receives traffic at rate of 1100 pps, the 100 packets dropped because of the rate limit are not reported.

**Solution** This is expected behavior.

### Egress Filtering of L2PT Traffic Not Supported

**Problem** Egress filtering of L2PT traffic is not supported on the QFX3500 switch. That is, if you configure L2PT to tunnel a protocol on an interface, you cannot also use a firewall filter to filter traffic for that protocol on that interface in the output direction. If you commit a configuration for this purpose, the firewall filter is not applied to the L2PT-tunneled traffic.

**Solution** This is expected behavior.

- Related Documentation**
- [Understanding Layer 2 Protocol Tunneling on page 1419](#)
  - [Configuring Layer 2 Protocol Tunneling on page 1563](#)



## Troubleshooting Private VLANs

Use the following information to troubleshoot a private VLAN configuration.

- [Limitations of Private VLANs on page 1763](#)
- [Forwarding with Private VLANs on page 1763](#)
- [Egress Firewall Filters with Private VLANs on page 1764](#)

### Limitations of Private VLANs

The following constraints apply to private VLAN configurations:

- IGMP snooping is not supported with private VLANs.
- Routed VLAN interfaces are not supported on private VLANs
- Routing between secondary VLANs in the same primary VLAN is not supported.

### Forwarding with Private VLANs

- Problem**
- When isolated VLAN or community VLAN tagged traffic is received on a PVLAN trunk port, MAC addresses are learned from the primary VLAN. This means that output from the `show ethernet-switching table` command shows that MAC addresses are learned from the primary VLAN and replicated to secondary VLANs. This behavior has no effect on forwarding decisions.
  - If a packet with a secondary VLAN tag is received on a promiscuous port, it is accepted and forwarded.
  - If a packet is received on a PVLAN trunk port and meets both of the conditions listed below, it is dropped.
    - The packet has a community VLAN tag.
    - The packet is destined to a unicast MAC address or multicast group MAC address that was learned on an isolated VLAN.
  - If a packet is received on a PVLAN trunk port and meets both of the conditions listed below, it is dropped.
    - The packet has an isolated VLAN tag.
    - The packet is destined to a unicast MAC address or multicast group MAC address that was learned on a community VLAN.
  - If a packet with a primary VLAN tag is received by a secondary (isolated or community) VLAN port, the secondary port forwards the packet.
  - If you configure a community VLAN on one device and configure another community VLAN on a second device and both community VLANs use the same VLAN ID, traffic for one of the VLANs can be forwarded to the other VLAN. For example, assume the following configuration:
    - Community VLAN comm1 on switch 1 has VLAN ID 50 and is a member of primary VLAN pvlan100.



- Community VLAN comm2 on switch 2 also has VLAN ID 50 and is a member of primary VLAN pvlan200.
- Primary VLAN pvlan100 exists on both switches.

If traffic for comm1 is sent from switch 1 to switch 2, it will be sent to the ports participating in comm2. (The traffic will also be forwarded to the ports in comm1, as you would expect.)

**Solution** These are expected behaviors.

---

### Egress Firewall Filters with Private VLANs

---

**Problem** If you apply a firewall filter in the output direction to a primary VLAN, the filter also applies to the secondary VLANs that are members of the primary VLAN when the traffic egresses with the primary VLAN tag or isolated VLAN tag, as listed below:

- Traffic forwarded from a secondary VLAN trunk port to a promiscuous port (trunk or access)
- Traffic forwarded from a secondary VLAN trunk port that carries an isolated VLAN to a PVLAN trunk port.
- Traffic forwarded from a promiscuous port (trunk or access) to a secondary VLAN trunk port
- Traffic forwarded from a PVLAN trunk port. to a secondary VLAN trunk port
- Traffic forwarded from a community port to a promiscuous port (trunk or access)

If you apply a firewall filter in the output direction to a primary VLAN, the filter does *not* apply to traffic that egresses with a community VLAN tag, as listed below:

- Traffic forwarded from a community trunk port to a PVLAN trunk port
- Traffic forwarded from a secondary VLAN trunk port that carries a community VLAN to a PVLAN trunk port
- Traffic forwarded from a promiscuous port (trunk or access) to a community trunk port
- Traffic forwarded from a PVLAN trunk port. to a community trunk port

If you apply a firewall filter in the output direction to a community VLAN, the following behaviors apply:

- The filter is applied to traffic forwarded from a promiscuous port (trunk or access) to a community trunk port (because the traffic egresses with the community VLAN tag).
- The filter is applied to traffic forwarded from a community port to a PVLAN trunk port (because the traffic egresses with the community VLAN tag).
- The filter is *not* applied to traffic forwarded from a community port to a promiscuous port (because the traffic egresses with the primary VLAN tag or untagged).



**Solution** These are expected behaviors. They occur only if you apply a firewall filter to a private VLAN in the output direction and do not occur if you apply a firewall filter to a private VLAN in the input direction.

- Related Documentation**
- [Understanding Private VLANs on page 1389](#)
  - [Understanding Secondary VLAN Trunk Ports and Promiscuous Access Ports on PVLANS on page 1399](#)
  - [Creating a Private VLAN on a Single Switch on page 1560](#)
  - [Creating a Private VLAN Spanning Multiple Switches on page 1561](#)
  - [Example: Configuring PVLANS with Secondary VLAN Trunk Ports and Promiscuous Access Ports on page 1529](#)

## Troubleshooting Q-in-Q and VLAN Translation Configuration

- [Firewall Filter Match Condition Not Working with Q-in-Q Tunneling on page 1765](#)
- [Egress Port Mirroring with VLAN Translation on page 1765](#)

### Firewall Filter Match Condition Not Working with Q-in-Q Tunneling

**Problem** If you create a firewall filter that includes a match condition of **dot1q-tag** or **dot1q-user-priority** and apply the filter on input to a trunk port that participates in a service VLAN, the match condition does not work if the Q-in-Q EtherType is not 0x8100. (When Q-in-Q tunneling is enabled, trunk interfaces are assumed to be part of the service provider or data center network and therefore participate in service VLANs.)

**Solution** This is expected behavior. To set the Q-in-Q EtherType to 0x8100, enter the **set dot1q-tunneling ethertype 0x8100** statement at the **[edit ethernet-switching-options]** hierarchy level. You must also configure the other end of the link to use the same EtherType.

### Egress Port Mirroring with VLAN Translation

**Problem** If you create a port-mirroring configuration that mirrors customer VLAN (CVLAN) traffic on egress and the traffic undergoes VLAN translation before being mirrored, the VLAN translation does not apply to the mirrored packets. That is, the mirrored packets retain the service VLAN (SVLAN) tag that should be replaced by the CVLAN tag on egress. The original packets are unaffected—on these packets VLAN translation works properly, and the SVLAN tag is replaced with the CVLAN tag on egress.

**Solution** This is expected behavior.

- Related Documentation**
- [Understanding Q-in-Q Tunneling and VLAN Translation on page 1416](#)
  - [Example: Setting Up Q-in-Q Tunneling on page 1541](#)







## PART 7

# High Availability

- [Overview on page 1769](#)
- [Configuration on page 1777](#)
- [Administration on page 1839](#)
- [Troubleshooting on page 1907](#)







## CHAPTER 19

# Overview

- [Software Features Overview on page 1769](#)

### Software Features Overview

---

- [Graceful Restart Concepts on page 1769](#)
- [Understanding Nonstop Software Upgrade for QFabric Systems on page 1770](#)
- [Understanding VRRP on page 1774](#)

### Graceful Restart Concepts

With routing protocols, any service interruption requires that an affected router recalculate adjacencies with neighboring routers, restore routing table entries, and update other protocol-specific information. An unprotected restart of a router can result in forwarding delays, route flapping, wait times stemming from protocol reconvergence, and even dropped packets. The main benefits of graceful restart are uninterrupted packet forwarding and temporary suppression of all routing protocol updates. Graceful restart enables a router to pass through intermediate convergence states that are hidden from the rest of the network.

Three main types of graceful restart are available on Juniper Networks routing platforms:

- Graceful restart for aggregate and static routes and for routing protocols—Provides protection for aggregate and static routes and for Border Gateway Protocol (BGP), End System-to-Intermediate System (ES-IS), Intermediate System-to-Intermediate System (IS-IS), Open Shortest Path First (OSPF), Routing Information Protocol (RIP), next-generation RIP (RIPng), and Protocol Independent Multicast (PIM) sparse mode routing protocols.
- Graceful restart for MPLS-related protocols—Provides protection for Label Distribution Protocol (LDP), Resource Reservation Protocol (RSVP), circuit cross-connect (CCC), and translational cross-connect (TCC).
- Graceful restart for virtual private networks (VPNs)—Provides protection for Layer 2 and Layer 3 VPNs.

Graceful restart works similarly for routing protocols and MPLS protocols and combines components of these protocol types to enable graceful restart in VPNs. The main benefits of graceful restart are uninterrupted packet forwarding and temporary suppression of



all routing protocol updates. Graceful restart thus enables a router to pass through intermediate convergence states that are hidden from the rest of the network.

Most graceful restart implementations define two types of routers—the restarting router and the helper router. The restarting router requires rapid restoration of forwarding state information so it can resume the forwarding of network traffic. The helper router assists the restarting router in this process. Graceful restart configuration statements typically affect either the restarting router or the helper router.

**Related  
Documentation**

- Understanding High Availability Features on Juniper Networks Routers
- Graceful Restart System Requirements
- Aggregate and Static Routes
- Graceful Restart and Routing Protocols
- Graceful Restart and MPLS-Related Protocols
- Graceful Restart and Layer 2 and Layer 3 VPNs
- Graceful Restart on Logical Systems
- Example: Configuring Graceful Restart
- [Configuring Graceful Restart for QFabric Systems on page 1777](#)

## Understanding Nonstop Software Upgrade for QFabric Systems

The framework that underlies a nonstop software upgrade in a QFabric system enables you to upgrade the system in a step-by-step manner and minimize the impact to the continuous operation of the system. This topic explains how a nonstop software upgrade works in a QFabric system, the steps that are involved, and the procedures that you need to implement to experience the benefits of this style of software upgrade.

Nonstop software upgrade enables some QFabric system components to continue operating while similar components in the system are being upgraded. In general, the QFabric system upgrades redundant components in stages so that some components remain operational and continue forwarding traffic while their equivalent counterparts upgrade to a new version of software.



**TIP:** Use the following guidelines to decide when to implement a nonstop software upgrade:

- If you need to upgrade all components of the system in the shortest amount of time (approximately one hour) and you do not need to retain the forwarding resiliency of the data plane, issue the **request system software add component all** command to perform a standard software upgrade. All components of the QFabric system upgrade simultaneously and expediently, but this type of upgrade does not provide resiliency or switchover capabilities.



- If you need to minimize service impact, preserve the forwarding operations of the data plane during the upgrade, and are willing to take the extra time required for component switchovers (in many cases, several hours), issue the three nonstop software upgrade commands (`request system software nonstop-upgrade` `director-group` | `fabric` | `node-group`) described in this topic in the correct order.



NOTE:

- Before you begin a nonstop software upgrade, issue the `request system software download` command to copy the software to the QFabric system.
- Each of the 3 nonstop software upgrade steps must be considered parts of the whole process. You must complete all 3 steps of a nonstop software upgrade in the correct order to ensure the proper operation of the QFabric system.
- Open two SSH sessions to the QFabric CLI. Use one session to monitor the upgrade itself and use a second session to verify that the QFabric system components respond to operational mode commands as expected. For more information on verification of the upgrade, see [“Verifying Nonstop Software Upgrade for QFabric Systems” on page 1868](#).
- Issue the `show fabric administration inventory` command to verify that all upgraded components are operational at the end of a step before beginning the next step.
- Once you start the nonstop software upgrade process, we strongly recommend that you complete all 3 steps within 12 hours.

The three steps to a successful nonstop software upgrade must be performed in the following order:

- Director group—The first step upgrades the Director devices, the fabric manager Routing Engine, and the diagnostic Routing Engine. To perform the first step, issue the **`request system software nonstop-upgrade director-group`** command. The key actions that occur during a Director group upgrade are:
  1. Connecting to the QFabric system by way of an SSH connection. This action establishes a load-balanced CLI session on one of the Director devices in the Director group.
  2. The QFabric system downloads and installs the new software in both Director devices.
  3. The Director device hosting the CLI session becomes the master for all QFabric system processes running on the Director group, such as the fabric manager and network Node group Routing Engines.
  4. The QFabric system installs the new software for the backup fabric manager Routing Engine on the backup Director device.



5. The backup Director device reboots to activate the new software.
6. The master Director device begins a 15 minute sequence that includes a temporary suspension of QFabric services and a QFabric database transfer. You cannot issue operational mode commands in the QFabric CLI during this period.
7. The QFabric system installs the new software for the fabric manager and diagnostic Routing Engines on the Director group master.
8. The QFabric system switches mastership of all QFabric processes from the master Director device to the backup Director device.
9. The master Director device reboots to activate the new software.
10. The CLI session terminates, and logging back in to the QFabric system with a new SSH connection establishes the session on the new master Director device (the original backup).
11. The previous master Director device resumes operation as a backup and the associated processes (such as the fabric manager and network Node group Routing Engines) become backup as well. The fabric control Routing Engine associated with this Director device returns to active status.



**NOTE:** After the Director group nonstop software upgrade completes, any Interconnect device or Node device that reboots will automatically download the new software, install it, and reboot again. As a result, try not to restart any QFabric system devices before you complete the rest of the nonstop software upgrade steps.



**TIP:**

- To enable BGP and OSPF to continue operating on the network Node group during a Director group nonstop service upgrade, we recommend that you configure graceful restart for these routing protocols. For more information on graceful restart, see [“Configuring Graceful Restart for QFabric Systems” on page 1777](#).
  - Wait 15 minutes after the second Director device returns to service and hosts Routing Engine processes before proceeding to step 2—the fabric upgrade. You can verify the operational status of both Director devices by issuing the `show fabric administration inventory director-group status` command. Also, issue the `show fabric administration inventory infrastructure` command to verify when the Routing Engine processes become load balanced (typically, there will be three to four Routing Engines running on each Director device).
- 
- Fabric—The second step upgrades the Interconnect devices and the fabric control Routing Engines. To perform the second step, issue the **request system software nonstop-upgrade fabric** command. The key actions that occur during a fabric upgrade are:



1. The QFabric system downloads, validates, and installs the new software in all Interconnect devices and fabric control Routing Engines (FC-0 and FC-1).
2. One fabric control Routing Engine reboots and comes back online.
3. The other fabric control Routing Engine reboots and comes back online.
4. The first Interconnect device reboots, comes back online, and resumes the forwarding of traffic.
5. Subsequent Interconnect devices reboot one at a time, come back online, and return to service.

**NOTE:**

- If the software does not load properly on any one of the fabric components, all components revert back to the original software version.
- If one of the components in a fabric upgrade does not reboot successfully, issue the **request system reboot fabric** command to reattempt the rebooting process for this fabric component and activate the new software.

- **Node group**—The third and final step upgrades Node groups. You can choose to upgrade a network Node group, a redundant server Node group, or individual server Node groups. You can upgrade the Node groups one at a time or in groups (known as upgrade groups). However, you must upgrade all Node groups in your QFabric system before you can complete the nonstop software upgrade process. To perform the third step, issue the **request system software nonstop-upgrade node-group** command.

The key actions that occur during a network Node group upgrade are:

1. The QFabric system copies the new software to each Node device one at a time.
2. The QFabric system validates and then installs the new software in all Node devices simultaneously.
3. The system copies the software to the network Node group Routing Engines.
4. The QFabric system validates and then installs the software in the network Node group Routing Engines one at a time -- first the backup, then the master.
5. The backup network Node group Routing Engine reboots and comes back online.
6. The supporting Node devices reboot and come back online one at a time.



**NOTE:** To reduce the total upgrade duration, configure an upgrade group. All Node devices within the upgrade group reboot at the same time.

7. The master network Node group Routing Engine relinquishes mastership to the backup, reboots, and comes back online.

The key actions that occur during a redundant server Node group upgrade are:



1. The QFabric system copies the new software to the backup Node device, then the master Node device.
2. The QFabric system validates and then installs the new software on the backup Node device, then the master Node device.
3. The backup Node device reboots, comes back online, and becomes the master Node device.
4. The previous master Node device reboots and comes back online as a backup Node device.



**NOTE:** For redundant server Node groups, both Node devices must be online before the upgrade will proceed. If one of the devices is no longer available, remove the Node device from the Node group configuration before you issue the nonstop software upgrade command.

The key actions that occur during a server Node group upgrade for a Node group that contains one member are:

1. The Node device downloads the software package and validates the software.
2. The Node device installs the software and reboots.



**NOTE:** Because there is no redundancy for Node groups containing a single Node device, traffic loss occurs when the device reboots during the upgrade.

#### Related Documentation

- [Performing a Nonstop Software Upgrade on the QFabric System on page 80](#)
- [Verifying Nonstop Software Upgrade for QFabric Systems on page 1868](#)
- [request system software nonstop-upgrade on page 363](#)
- [request system software add on page 348](#)
- [Configuring Graceful Restart for QFabric Systems on page 1777](#)

## Understanding VRRP

The Juniper Networks QFX Series supports the Virtual Router Redundancy Protocol (VRRP). This topic covers:

- [Overview of VRRP on page 1774](#)
- [Sample VRRP Topology on page 1775](#)

### Overview of VRRP

---

Configuring end hosts on your network with static default routes minimizes configuration effort and complexity and reduces processing overhead on the end hosts. When hosts are configured with static routes, the failure of the default gateway normally results in a



catastrophic event, isolating all hosts that are unable to detect available alternate paths to their gateway. Using Virtual Router Redundancy Protocol (VRRP) enables you to dynamically provide alternative gateways for end hosts if the primary gateway fails.

VRRP (defined in RFC 3768) provides dynamic failover of IP addresses from one router to another in the event of failure. You can implement VRRP to provide a highly available default path to a gateway without needing to configure dynamic routing or router discovery protocols on end hosts.

Switches configured with VRRP share a virtual IP address, which is the address you configure as the default route on the hosts. At any time, one of the switches is the VRRP master, meaning that it owns the virtual IP address and is the active default gateway. The other devices are backups. The switches dynamically assign master and backup roles based on priorities that you configure (**1 through 255**). If the master fails, the backup switch with the highest priority becomes the master within a few seconds. This is done without any interaction with the hosts.

In VRRP operation, the master sends advertisements to the backup switches at regular intervals. The default interval is 1 second. If the backup switches do not receive an advertisement for a set period, the backup with the highest priority takes over as master within a few seconds and begins forwarding packets. This is done without any interaction with the hosts.




**NOTE:** Priority 255 cannot be set for routed VLAN interfaces (RVIs).

### Sample VRRP Topology

Figure 38 on page 1776 illustrates a basic VRRP topology. In this example, switches A, B, and C are running VRRP and share the virtual IP address 10.1.1.1. The default gateway for each of the clients is 10.1.1.1.



Figure 38: Basic VRRP Topology

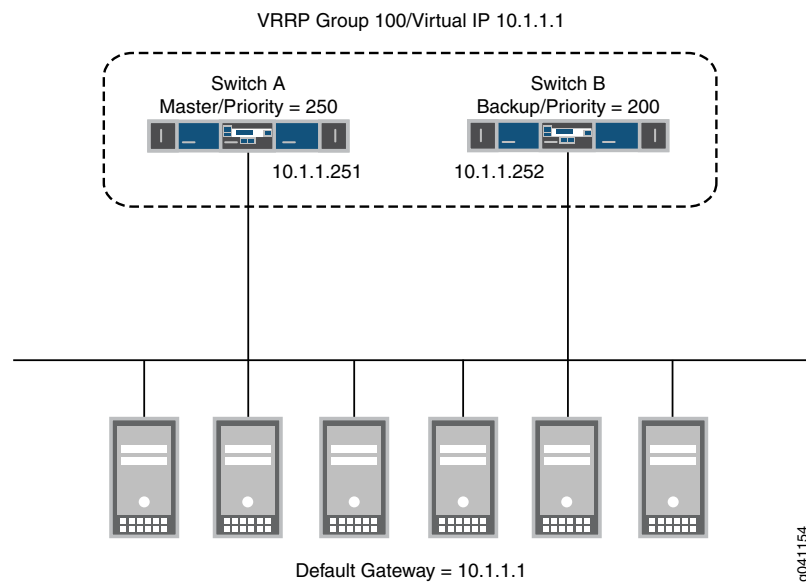

g041154

- Related Documentation**
- [Configuring Basic VRRP Support on page 1792](#)
  - [Example: Configuring VRRP for Load Sharing on page 1787](#)



# Configuration

- [Configuration Tasks for Graceful Restart on page 1777](#)
- [Configuration Example for VRRP on page 1787](#)
- [Configuration Tasks for VRRP on page 1792](#)
- [Configuration Statements for Graceful Restart on page 1803](#)
- [Configuration Statements for VRRP on page 1816](#)

## Configuration Tasks for Graceful Restart

---

- [Configuring Graceful Restart for QFabric Systems on page 1777](#)
- [Configuring Routing Protocols Graceful Restart on page 1781](#)

### Configuring Graceful Restart for QFabric Systems

When you configure graceful restart in the QFabric CLI, the QFabric system applies the configuration to the network Node group to participate in graceful restart operations with devices external to the QFabric system. Such configuration preserves routing table state and helps neighboring routing devices to resume routing operations more quickly after a system restart. This also enables the network Node group to resume routing operations rapidly if there is a restart in the QFabric system (such as a software upgrade). As a result, we recommend enabling graceful restart for routing protocols in the QFabric CLI.



**NOTE:** The QFabric system also uses graceful restart internally within the fabric to facilitate interfabric resiliency and recovery. This internal feature is enabled by default with no configuration required.

- [Enabling Graceful Restart on page 1778](#)
- [Configuring Graceful Restart Options for BGP on page 1778](#)
- [Configuring Graceful Restart Options for OSPF and OSPFv3 on page 1779](#)
- [Tracking Graceful Restart Events on page 1780](#)



## Enabling Graceful Restart

---

By default, graceful restart is disabled. To enable graceful restart, include the **graceful-restart** statement at the **[edit routing-instance *instance-name* routing-options]** or **[edit routing-options]** hierarchy level.

For example:

```
routing-options {  
  graceful-restart;  
}
```

To configure the duration of the graceful restart period, include the **restart-duration** at the **[edit routing-options graceful-restart]** hierarchy level.



**NOTE:** Helper mode (the ability to assist a neighboring router attempting a graceful restart) is enabled by default when you start the routing platform, even if graceful restart is not enabled. You can disable helper mode on a per-protocol basis.

```
[edit]  
routing-options {  
  graceful-restart {  
    disable;  
    restart-duration seconds;  
  }  
}
```

To disable graceful restart globally, include the **disable** statement at the **[edit routing-options graceful-restart]** hierarchy level.

When graceful restart is enabled for all routing protocols at the **[edit routing-options graceful-restart]** hierarchy level, you can disable graceful restart on a per-protocol basis.



**NOTE:** If you configure graceful restart after a BGP or LDP session has been established, the BGP or LDP session restarts and the peers negotiate graceful restart capabilities. Also, the BGP peer routing statistics are reset to zero.

## Configuring Graceful Restart Options for BGP

---

To configure the duration of the BGP graceful restart period, include the **restart-time** statement at the **[edit protocols bgp graceful-restart]** hierarchy level. To set the length of time the router waits to receive messages from restarting neighbors before declaring them down, include the **stale-routes-time** statement at the **[edit protocols bgp graceful-restart]** hierarchy level.

```
[edit]  
protocols {  
  bgp {  
    graceful-restart {  
      disable;
```



```

        restart-time seconds;
        stale-routes-time seconds;
    }
}
routing-options {
    graceful-restart;
}

```

To disable BGP graceful restart capability for all BGP sessions, include the **disable** statement at the **[edit protocols bgp graceful-restart]** hierarchy level.



**NOTE:** To set BGP graceful restart properties or disable them for a group, include the desired statements at the **[edit protocols bgp group group-name graceful-restart]** hierarchy level.

To set BGP graceful restart properties or disable them for a specific neighbor in a group, include the desired statements at the **[edit protocols bgp group group-name neighbor ip-address graceful-restart]** hierarchy level.



**NOTE:** Configuring graceful restart for BGP resets the BGP peer routing statistics to zero. Also, existing BGP sessions restart, and the peers negotiate graceful restart capabilities.

### Configuring Graceful Restart Options for OSPF and OSPFv3

To configure the duration of the OSPF/OSPFv3 graceful restart period, include the **restart-duration** statement at the **[edit protocols (ospf | ospf3) graceful-restart]** hierarchy level. To specify the length of time for which the router notifies helper routers that it has completed graceful restart, include the **notify-duration** at the **[edit protocols (ospf | ospf3) graceful-restart]** hierarchy level. Strict OSPF link-state advertisement (LSA) checking results in the termination of graceful restart by a helping router. To disable strict LSA checking, include the **no-strict-lsa-checking** statement at the **[edit protocols (ospf | ospf3) graceful-restart]** hierarchy level.

```

[edit]
protocols {
    ospf | ospfv3 {
        graceful-restart {
            disable;
            helper-disable
            no-strict-lsa-checking;
            notify-duration seconds;
            restart-duration seconds;
        }
    }
}
routing-options {
    graceful-restart;
}

```



To disable OSPF/OSPFv3 graceful restart, include the **disable** statement at the **[edit protocols (ospf | ospfv3) graceful-restart]** hierarchy level.

Starting with Release 11.3, the Junos OS supports both the standard (based on RFC 3623, *Graceful OSPF Restart*) and the restart signaling-based (as specified in RFC 4811, RFC 4812, and RFC 4813) helper modes for OSPF version 2 graceful restart configurations. Both the standard and restart signaling-based helper modes are enabled by default. To disable the helper mode for OSPF version 2 graceful restart configurations, include the **helper-disable <both | restart-signaling | standard>** statement at the **[edit protocols ospf graceful-restart]** hierarchy level. Note that the last committed statement always takes precedence over the previous one.

```
[edit protocols ospf]
 graceful-restart {
   helper-disable <both | restart-signaling | standard>
 }
```

To reenble the helper mode, delete the **helper-disable** statement from the configuration by using the **delete protocols ospf graceful-restart helper-disable <restart-signaling | standard | both>** command. In this case also, the last executed command takes precedence over the previous ones.



NOTE:

Restart signaling-based helper mode is not supported for OSPFv3 configurations. To disable helper mode for OSPFv3 configurations, include the **helper-disable** statement at the **[edit protocols ospfv3 graceful-restart]** hierarchy level.



TIP: You can also track graceful restart events with the **traceoptions** statement at the **[edit protocols (ospf | ospfv3)]** hierarchy level. For more information, see [“Tracking Graceful Restart Events” on page 1780](#).



NOTE: If you configure BFD and graceful restart for OSPF, graceful restart might not work as expected.

---

## Tracking Graceful Restart Events

To track the progress of a graceful restart event, you can configure graceful restart trace options flags for IS-IS and OSPF/OSPFv3. To configure graceful restart trace options, include the **graceful-restart** statement at the **[edit protocols protocol traceoptions flag]** hierarchy level:

```
[edit protocols]
 isis {
   traceoptions {
     flag graceful-restart;
   }
 }
```



```

}
(ospf | ospf3) {
  traceoptions {
    flag graceful-restart;
  }
}

```

- Related Documentation**
- [Graceful Restart Concepts on page 1769](#)
  - [Verifying Graceful Restart Operation on page 1839](#)

## Configuring Routing Protocols Graceful Restart

This topic includes the following sections:

- [Enabling Graceful Restart on page 1781](#)
- [Configuring Graceful Restart Options for BGP on page 1782](#)
- [Configuring Graceful Restart Options for ES-IS on page 1783](#)
- [Configuring Graceful Restart Options for IS-IS on page 1783](#)
- [Configuring Graceful Restart Options for OSPF and OSPFv3 on page 1784](#)
- [Configuring Graceful Restart Options for RIP and RIPng on page 1785](#)
- [Configuring Graceful Restart Options for PIM Sparse Mode on page 1785](#)
- [Tracking Graceful Restart Events on page 1787](#)

### Enabling Graceful Restart

By default, graceful restart is disabled. To enable graceful restart, include the **graceful-restart** statement at the **[edit routing-instance *instance-name* routing-options]** or **[edit routing-options]** hierarchy level.

For example:

```

routing-options {
  graceful-restart;
}

```

To configure the duration of the graceful restart period, include the **restart-duration** at the **[edit routing-options graceful-restart]** hierarchy level.



**NOTE:** Helper mode (the ability to assist a neighboring router attempting a graceful restart) is enabled by default when you start the routing platform, even if graceful restart is not enabled. You can disable helper mode on a per-protocol basis.

```

[edit]
routing-options {
  graceful-restart {
    disable;
    restart-duration seconds;
  }
}

```



```
}
```

To disable graceful restart globally, include the **disable** statement at the **[edit routing-options graceful-restart]** hierarchy level.

When graceful restart is enabled for all routing protocols at the **[edit routing-options graceful-restart]** hierarchy level, you can disable graceful restart on a per-protocol basis.



**NOTE:** If you configure graceful restart after a BGP or LDP session has been established, the BGP or LDP session restarts and the peers negotiate graceful restart capabilities. Also, the BGP peer routing statistics are reset to zero.

### Configuring Graceful Restart Options for BGP

To configure the duration of the BGP graceful restart period, include the **restart-time** statement at the **[edit protocols bgp graceful-restart]** hierarchy level. To set the length of time the router waits to receive messages from restarting neighbors before declaring them down, include the **stale-routes-time** statement at the **[edit protocols bgp graceful-restart]** hierarchy level.

```
[edit]
protocols {
  bgp {
    graceful-restart {
      disable;
      restart-time seconds;
      stale-routes-time seconds;
    }
  }
}
routing-options {
  graceful-restart;
}
```

To disable BGP graceful restart capability for all BGP sessions, include the **disable** statement at the **[edit protocols bgp graceful-restart]** hierarchy level.



**NOTE:** To set BGP graceful restart properties or disable them for a group, include the desired statements at the **[edit protocols bgp group group-name graceful-restart]** hierarchy level.

To set BGP graceful restart properties or disable them for a specific neighbor in a group, include the desired statements at the **[edit protocols bgp group group-name neighbor ip-address graceful-restart]** hierarchy level.



**NOTE:** Configuring graceful restart for BGP resets the BGP peer routing statistics to zero. Also, existing BGP sessions restart, and the peers negotiate graceful restart capabilities.



### Configuring Graceful Restart Options for ES-IS

On J Series Services Routers, to configure the duration of the ES-IS graceful restart period, include the **restart-duration** statement at the **[edit protocols esis graceful-restart]** hierarchy level.

```
[edit]
protocols {
  esis {
    graceful-restart {
      disable;
      restart-duration seconds;
    }
  }
}
routing-options {
  graceful-restart;
}
```

To disable ES-IS graceful restart capability, include the **disable** statement at the **[edit protocols esis graceful-restart]** hierarchy level.

### Configuring Graceful Restart Options for IS-IS

To configure the duration of the IS-IS graceful restart period, include the **restart-duration** statement at the **[edit protocols isis graceful-restart]** hierarchy level.

```
[edit]
protocols {
  isis {
    graceful-restart {
      disable;
      helper-disable;
      restart-duration seconds;
    }
  }
}
routing-options {
  graceful-restart;
}
```

To disable IS-IS graceful restart helper capability, include the **helper-disable** statement at the **[edit protocols isis graceful-restart]** hierarchy level. To disable IS-IS graceful restart capability, include the **disable** statement at the **[edit protocols isis graceful-restart]** hierarchy level.



**NOTE:** If you configure Bidirectional Forwarding Detection (BFD) and graceful restart for IS-IS, graceful restart might not work as expected.



**NOTE:** You can also track graceful restart events with the **traceoptions** statement at the **[edit protocols isis]** hierarchy level. For more information, see [“Tracking Graceful Restart Events” on page 1780](#).



## Configuring Graceful Restart Options for OSPF and OSPFv3

To configure the duration of the OSPF/OSPFv3 graceful restart period, include the **restart-duration** statement at the **[edit protocols (ospf | ospf3) graceful-restart]** hierarchy level. To specify the length of time for which the router notifies helper routers that it has completed graceful restart, include the **notify-duration** at the **[edit protocols (ospf | ospf3) graceful-restart]** hierarchy level. Strict OSPF link-state advertisement (LSA) checking results in the termination of graceful restart by a helping router. To disable strict LSA checking, include the **no-strict-lsa-checking** statement at the **[edit protocols (ospf | ospf3) graceful-restart]** hierarchy level.

```
[edit]
protocols {
  ospf | ospfv3 {
    graceful-restart {
      disable;
      helper-disable
      no-strict-lsa-checking;
      notify-duration seconds;
      restart-duration seconds;
    }
  }
}
routing-options {
  graceful-restart;
}
```

To disable OSPF/OSPFv3 graceful restart, include the **disable** statement at the **[edit protocols (ospf | ospf3) graceful-restart]** hierarchy level.

Starting with Release 11.3, the Junos OS supports both the standard (based on RFC 3623, *Graceful OSPF Restart*) and the restart signaling-based (as specified in RFC 4811, RFC 4812, and RFC 4813) helper modes for OSPF version 2 graceful restart configurations. Both the standard and restart signaling-based helper modes are enabled by default. To disable the helper mode for OSPF version 2 graceful restart configurations, include the **helper-disable <both | restart-signaling | standard>** statement at the **[edit protocols ospf graceful-restart]** hierarchy level. Note that the last committed statement always takes precedence over the previous one.

```
[edit protocols ospf]
graceful-restart {
  helper-disable <both | restart-signaling | standard>
}
```

To reenabling the helper mode, delete the **helper-disable** statement from the configuration by using the **delete protocols ospf graceful-restart helper-disable <restart-signaling | standard | both>** command. In this case also, the last executed command takes precedence over the previous ones.



**NOTE:**

Restart signaling-based helper mode is not supported for OSPFv3 configurations. To disable helper mode for OSPFv3 configurations, include the `helper-disable` statement at the `[edit protocols ospfv3 graceful-restart]` hierarchy level.



**TIP:** You can also track graceful restart events with the `traceoptions` statement at the `[edit protocols (ospf | ospf3)]` hierarchy level. For more information, see [“Tracking Graceful Restart Events” on page 1780](#).



**NOTE:** You cannot enable OSPFv3 graceful restart between a routing platform running Junos OS Release 7.5 and earlier and a routing platform running Junos OS Release 7.6 or later. As a workaround, make sure both routing platforms use the same Junos OS version.



**NOTE:** If you configure BFD and graceful restart for OSPF, graceful restart might not work as expected.

### Configuring Graceful Restart Options for RIP and RIPng

To configure the duration of the RIP or RIPng graceful restart period, include the `restart-time` statement at the `[edit protocols (rip | ripng) graceful-restart]` hierarchy level.

```
[edit]
protocols {
  (rip | ripng) {
    graceful-restart {
      disable;
      restart-time seconds;
    }
  }
}
routing-options {
  graceful-restart;
}
```

To disable RIP or RIPng graceful restart capability, include the `disable` statement at the `[edit protocols (rip | ripng) graceful-restart]` hierarchy level.

### Configuring Graceful Restart Options for PIM Sparse Mode

PIM sparse mode continues to forward existing multicast packet streams during a graceful restart, but does not forward new streams until after the restart is complete. After a restart, the routing platform updates the forwarding state with any updates that were received from neighbors and occurred during the restart period. For example, the routing



platform relearns the join and prune states of neighbors during the restart, but does not apply the changes to the forwarding table until after the restart.

PIM sparse mode-enabled routing platforms generate a unique 32-bit random number called a generation identifier. Generation identifiers are included by default in PIM hello messages, as specified in the IETF Internet draft *Protocol Independent Multicast - Sparse Mode (PIM-SM): Protocol Specification (Revised)*. When a routing platform receives PIM hellos containing generation identifiers on a point-to-point interface, Junos OS activates an algorithm that optimizes graceful restart.

Before PIM sparse mode graceful restart occurs, each routing platform creates a generation identifier and sends it to its multicast neighbors. If a PIM sparse mode-enabled routing platform restarts, it creates a new generation identifier and sends it to its neighbors. When a neighbor receives the new identifier, it resends multicast updates to the restarting router to allow it to exit graceful restart efficiently. The restart phase completes when either the PIM state becomes stable or when the restart interval timer expires.

If a routing platform does not support generation identifiers or if PIM is enabled on multipoint interfaces, the PIM sparse mode graceful restart algorithm does not activate, and a default restart timer is used as the restart mechanism.

To configure the duration of the PIM graceful restart period, include the **restart-duration** statement at the **[edit protocols pim graceful-restart]** hierarchy level:

```
[edit]
protocols {
  pim {
    graceful-restart {
      disable;
      restart-duration seconds;
    }
  }
}
routing-options {
  graceful-restart;
}
```

To disable PIM sparse mode graceful restart capability, include the **disable** statement at the **[edit protocols pim graceful-restart]** hierarchy level.



**NOTE:** Multicast forwarding can be interrupted in two ways. First, if the underlying routing protocol is unstable, multicast reverse-path-forwarding (RPF) checks can fail and cause an interruption. Second, because the forwarding table is not updated during the graceful restart period, new multicast streams are not forwarded until graceful restart is complete.

---



### Tracking Graceful Restart Events

To track the progress of a graceful restart event, you can configure graceful restart trace options flags for IS-IS and OSPF/OSPFv3. To configure graceful restart trace options, include the **graceful-restart** statement at the **[edit protocols *protocol* traceoptions flag]** hierarchy level:

```
[edit protocols]
isis {
  traceoptions {
    flag graceful-restart;
  }
}
(ospf | ospf3) {
  traceoptions {
    flag graceful-restart;
  }
}
```

#### Related Documentation

- [Graceful Restart Concepts on page 1769](#)
- Graceful Restart System Requirements
- Graceful Restart and Routing Protocols
- [Verifying Graceful Restart Operation on page 1839](#)
- Example: Configuring Graceful Restart

### Configuration Example for VRRP

- [Example: Configuring VRRP for Load Sharing on page 1787](#)

#### Example: Configuring VRRP for Load Sharing

If you do not want to dedicate a switch to be a VRRP backup (and therefore leave it idle unless the master fails), you can create a load-sharing configuration in which each participating switch simultaneously acts as a master and a backup.

One reason to use a load-sharing (active-active) configuration is that you are more likely to actively monitor and maintain both switches and notice if a problem occurs on either of them. If you use a configuration in which one switch is only a backup (an active-backup configuration), you might be less likely to pay attention to the backup switch while it is idle. In the worst case, this could lead to the backup switch developing an undetected problem and not being able to perform adequately when a failover occurs.

- [Requirements on page 1788](#)
- [Overview and Topology on page 1788](#)
- [Configuring VRRP on Both Switches on page 1789](#)
- [Verification on page 1791](#)



Requirements


This example uses the following hardware and software components:

- Two QFX3500 switches
- Junos OS Release 11.3 or later
- Static routing or a dynamic routing protocol enabled on both switches.

Overview and Topology

This example uses two VRRP groups, each of which has its own virtual IP address. Devices on the LAN use one of these virtual IP addresses as their default gateway. If one of the switches fails, the other switch takes over for it. In the topology shown in [Figure 39 on page 1788](#), for example, Switch A is the master for VRRP group 100. If Switch A fails, Switch B takes over and forwards traffic that the end devices send to the default gateway address 10.1.1.1.

Figure 39: VRRP Load-Sharing Configuration

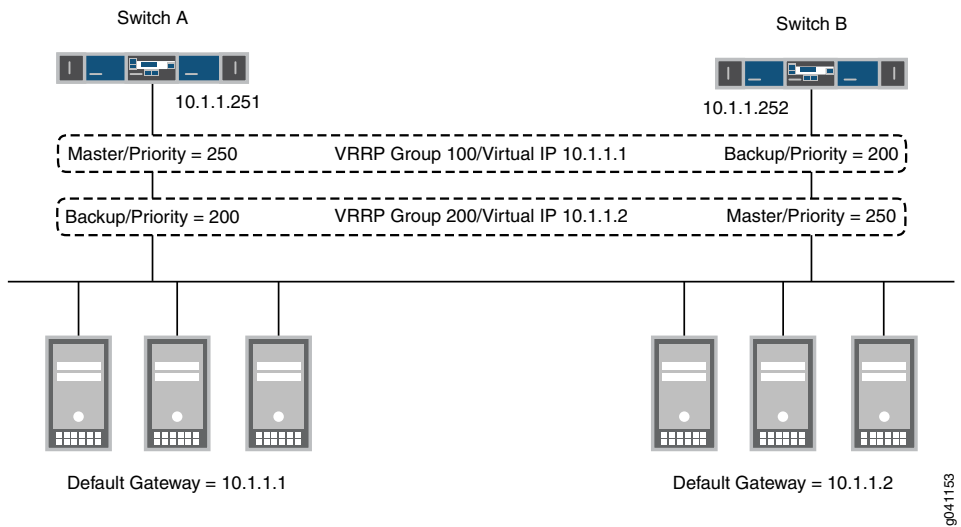

This example shows a simple configuration to illustrate the basic steps for configuring two switches running VRRP to back each other up. [Table 140 on page 1788](#) lists VRRP settings for each switch.

Table 140: Settings for VRRP Load-Sharing Example

Switch A	Switch B
VRRP Group 100:	VRRP Group 100:
<ul style="list-style-type: none"><li>• Interface address: 10.1.1.251</li><li>• VIP: 10.1.1.1</li><li>• Priority: 250</li></ul>	<ul style="list-style-type: none"><li>• Interface address: 10.1.1.252</li><li>• VIP: 10.1.1.1</li><li>• Priority: 200</li></ul>



Table 140: Settings for VRRP Load-Sharing Example (*continued*)

Switch A	Switch B
VRRP Group 200: <ul style="list-style-type: none"> <li>Interface address: 10.1.1.251</li> <li>VIP: 10.1.1.2</li> <li>Priority: 200</li> </ul>	VRRP Group 200: <ul style="list-style-type: none"> <li>Interface address: 10.1.1.252</li> <li>VIP: 10.1.1.2</li> <li>Priority: 250</li> </ul>

In addition to configuring the two switches as shown, you must configure your end devices so that some of them use one of the virtual IP addresses as their default gateway and the remaining end devices use the other virtual IP address as their default gateway.

Note that if a failover occurs, the remaining switch might be unable to handle all of the traffic, depending on the demand.

### Configuring VRRP on Both Switches

#### CLI Quick Configuration

Enter the following on Switch A:

```
[edit]
set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.251/24 vrrp-group 100 virtual-address 10.1.1.1
set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.251/24 vrrp-group 100 priority 250
set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.251/24 vrrp-group 200 virtual-address 10.1.1.2
set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.251/24 vrrp-group 200 priority 200
```

Enter the following on Switch B:

```
[edit]
set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.252/24 vrrp-group 100 virtual-address 10.1.1.1
set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.252/24 vrrp-group 100 priority 200
set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.252/24 vrrp-group 200 virtual-address 10.1.1.2
set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.252/24 vrrp-group 200 priority 250
```

#### Step-by-Step Procedure

Configure the VRRP groups and priorities on Switch A:

- Create VRRP group 100 on Switch A and configure the virtual IP address for the group:
 

```
[edit]
user@switch# set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.252/24 vrrp-group 100 virtual-address 10.1.1.1
```
- Assign the VRRP priority for this interface in this group:
 

```
[edit]
user@switch# set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.251/24 vrrp-group 100 priority 250
```
- Create VRRP group 200 on Switch A and configure the virtual IP address for the group:
 

```
[edit]
user@switch# set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.251/24 vrrp-group 200 virtual-address 10.1.1.2
```
- Assign the VRRP priority for this interface in this group:



```
[edit]
user@switch# set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.251/24 vrrp-group
100 priority 200
```

### Step-by-Step Procedure

Configure the VRRP groups and priorities on Switch B:

1. Create VRRP group 100 on Switch B and configure the virtual IP address for the group:

```
[edit]
user@switch# set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.252/24 vrrp-group
100 virtual-address 10.1.1.1
```

2. Assign the VRRP priority for this interface in this group:

```
[edit]
user@switch# set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.252/24 vrrp-group
100 priority 200
```

Switch A remains the master for group 100 because it has the highest priority for this group.

3. Create VRRP group 200 on Switch A and configure the virtual IP address for the group:

```
[edit]
user@switch# set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.252/24 vrrp-group
200 virtual-address 10.1.1.2
```

4. Assign the VRRP priority for this interface in this group:

```
[edit]
user@switch# set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.251/24 vrrp-group
100 priority 250
```

Switch B becomes the master for group 200 because it has the highest priority for this group.

**Results** Display the results of the configuration on Switch A:

```
user@switch> show configuration
interfaces {
  xe-0/0/0 {
    unit 0 {
      family inet {
        address 10.1.1.251 {
          vrrp-group 100 {
            virtual address 10.1.1.1
            priority 250
          }
          vrrp-group 200 {
            virtual address 10.1.1.2
            priority 200
          }
        }
      }
    }
  }
}
```

Display the results of the configuration on Switch B:



```

user@switch> show configuration
interfaces {
  xe-0/0/0 {
    unit 0 {
      family inet {
        address 10.1.1.252 {
          vrrp-group 100 {
            virtual address 10.1.1.1
            priority 200
          }
          vrrp-group 200 {
            virtual address 10.1.1.2
            priority 250
          }
        }
      }
    }
  }
}

```

### Verification

- [Verifying that VRRP is Working on Switch A on page 1791](#)
- [Verifying that VRRP is Working on Switch B on page 1791](#)

#### *Verifying that VRRP is Working on Switch A*

**Purpose** Verify that VRRP is active on Switch A and that the master and backup roles are correct.

**Action** Use the following command to verify that VRRP is active on Switch A and that the switch is master for group 100 and backup for group 200.

```

user@switch> show vrrp

```

Interface Address	State	Group	VR state	Timer	Type
xe-0/0/0.0	up	100	master	A .0327 1c1 10.1.1.251 vip 10.1.1.1	
xe-0/0/0.0	up	200	backup	A .0327 1c1 10.1.1.251 vip 10.1.1.2	

**Meaning** The `show vrrp` command displays fundamental information about the VRRP configuration. This output shows that both VRRP groups are active and that this switch has assumed the correct master and backup roles. The `1c1` address is the physical address of the interface and the `vip` address is the virtual address shared by both switches. The **Timer** value (**A .0327**) indicates the remaining time (in seconds) in which this switch expects to receive a VRRP advertisement from the other switch. If an advertisement for group 200 does not arrive before the timer expires, Switch A asserts itself as the master for this group.

#### *Verifying that VRRP is Working on Switch B*

**Purpose** Verify that VRRP is active on Switch B and that the master and backup roles are correct.



**Action** Use the following command to verify that VRRP is active on Switch B and that the switch is backup for group 100 and master for group 200.

```
user@switch> show vrrp
```

Interface	State	Group	VR state	Timer	Type
xe-0/0/0.0	up	100	backup	A .0327 lcl 10.1.1.252 vip 10.1.1.1	
xe-0/0/0.0	up	200	master	A .0327 lcl 10.1.1.252 vip 10.1.1.2	

**Meaning** The **show vrrp** command displays fundamental information about the VRRP configuration. This output shows that both VRRP groups are active and that this switch has assumed the correct master and backup roles. The **lcl** address is the physical address of the interface and the **vip** address is the virtual address shared by both switches. The **Timer** value (**A .0327**) indicates the remaining time (in seconds) in which this switch expects to receive a VRRP advertisement from the other switch. If an advertisement for group 100 does not arrive before the timer expires, Switch B asserts itself as the master for this group.

**Related Documentation**

- [Understanding VRRP on page 1774](#)
- [Configuring Basic VRRP Support on page 1792](#)

## Configuration Tasks for VRRP

- [Configuring Basic VRRP Support on page 1792](#)
- [Configuring VRRP Authentication \(IPv4 Only\) on page 1793](#)
- [Configuring the Startup Period for VRRP Operations on page 1794](#)
- [Configuring the Advertisement Interval for the VRRP Master on page 1795](#)
- [Configuring VRRP Preemption and Hold Time on page 1796](#)
- [Configuring a Route to Be Tracked on page 1797](#)
- [Configuring a Logical Interface to Be Tracked on page 1798](#)
- [Configuring a Backup to Accept Packets Destined for the Virtual IP Address on page 1799](#)
- [Configuring Passive ARP Learning for VRRP Backups on page 1800](#)
- [Configuring the Silent Period on page 1801](#)
- [Configuring Inheritance for a VRRP Group on page 1801](#)

### Configuring Basic VRRP Support

To configure basic VRRP support, configure VRRP groups on interfaces by including the **vrrp-group** statement:

```
vrrp-group group-id {
    priority number;
    virtual-address [ addresses ];
}
```

An interface can be a member of multiple VRRP groups.



You can include this statement at the following hierarchy level:

- **[edit interfaces *interface-name* unit *logical-unit-number* family inet address *address*]**

For each interface, you must configure the following:

- Group identifier—Assign a value from 0 through 255. You must use the same identifier for each switch in the VRRP group.
- Priority—Assign a value from 1 through 255. The switch with the highest priority becomes the VRRP master. Assign different priorities to each switch in the VRRP group. If there are two or more switches with the same priority, the switch with the VRRP interface that has the highest IP address becomes the master.
- Virtual IP address—Normally, you configure only one address per group, but you can configure as many as eight addresses. Do not include a prefix length in a virtual IP address. The following considerations apply to configuring a virtual IP address:
  - You must configure the same address on all the switches in the VRRP group.
  - If you configure a virtual IP address to be the same as a physical interface address, the switch with that interface becomes the master for the group. You must configure the priority to be 255, and you must configure preemption by including the **preempt** statement.
  - If the virtual IP address is not the same as the physical interface address, you must ensure that the address does not appear anywhere else in the switch configuration. For example, verify that you do not use this address for another interface (including an aggregated Ethernet interface) or for a static ARP entry.



**NOTE:** If you enable MAC source address filtering on an interface, you must include the virtual MAC address in the list of source MAC addresses that you specify in the **source-address-filter** statement at the **[edit interfaces *interface-name*]** hierarchy. MAC addresses ranging from 00:00:5e:00:01:00 through 00:00:5e:00:01:ff are reserved for VRRP, as defined in RFC 3768. The VRRP group number must be the decimal equivalent of the last hexadecimal byte of the virtual MAC address.

#### Related Documentation

- [Understanding VRRP on page 1774](#)
- [Configuring the Startup Period for VRRP Operations on page 1794](#)
- [Configuring VRRP Authentication \(IPv4 Only\) on page 1793](#)

## Configuring VRRP Authentication (IPv4 Only)

VRRP (IPv4 only) protocol exchanges can be authenticated to guarantee that only trusted switches participate in a VRRP group. By default, VRRP authentication is disabled. You can configure one of the following authentication methods for a group, and each switch in the same group must use the same method:



- Simple authentication—Uses a text password included in the transmitted packet. The receiving switch uses an authentication key (password) to verify the packet.
- Message Digest 5 (MD5) algorithm—Adds an authentication header (AH) to the IP packet that encapsulates the VRRP packet. You create an authentication key that is used to create a hash of the packet, and the hash is stored in the AH. A receiving switch recalculates the hash on the incoming packet and compares the hashes. If they are identical, the packet is valid and is accepted. Otherwise the switch drops the incoming packet.

To enable authentication and specify an authentication method, include the **authentication-type** statement.

**authentication-type** *authentication*;

**authentication** can be **simple** or **md5**. The authentication type must be the same for all the switches in the VRRP group.

You can include this statement at the following hierarchy level:

- [edit interfaces *interface-name* unit *logical-unit-number* family inet address *address* vrrp-group *group-id*]

If you include the **authentication-type** statement, you can configure a key (password) on each interface by including the **authentication-key** statement:

**authentication-key** *key*;

**key** (the password) is an ASCII string. For simple authentication, it can be from 1 through 8 characters long. For MD5 authentication, it can be from 1 through 16 characters long. If you include spaces, enclose all characters in quotation marks (" ").



**NOTE:** The key must be the same for all switches in the VRRP group.

---

You can include this statement at the following hierarchy level:

- [edit interfaces *interface-name* unit *logical-unit-number* family inet address *address* vrrp-group *group-id*]

**Related  
Documentation**

- [Understanding VRRP on page 1774](#)
- [Configuring Basic VRRP Support on page 1792](#)

## Configuring the Startup Period for VRRP Operations

Configure the startup-silent period interval to avoid alarms caused by the delay or interruption of the incoming VRRP advertisement packets while an interface is coming online. The period starts when the state of a VRRP interface is changed from down to up. During this period, Master Down Events are ignored.



To configure the startup period for VRRP operations, include the **startup-silent-period** statement at the **[edit protocols vrrp]** hierarchy level:

```
[edit protocols vrrp]
  startup-silent-period seconds;
```

#### Related Documentation

- [Understanding VRRP on page 1774](#)
- [Configuring Basic VRRP Support on page 1792](#)
- [Example: Configuring VRRP for Load Sharing on page 1787](#)

## Configuring the Advertisement Interval for the VRRP Master

By default, the master switch sends VRRP advertisement packets every second to all members of the VRRP group. These packets indicate that the master switch is still operational. If the master switch fails or becomes unreachable, the backup switch with the highest priority value becomes the new master switch.

You can modify the advertisement interval in seconds or in milliseconds; the interval must be the same for all routing platforms in the VRRP group.

This topic contains the following sections:

- [Modifying the Advertisement Interval in Seconds on page 1795](#)
- [Modifying the Advertisement Interval in Milliseconds on page 1795](#)

### Modifying the Advertisement Interval in Seconds

To modify the time, in seconds, between the sending of VRRP advertisement packets, include the **advertise-interval** statement:

```
advertise-interval seconds;
```

The interval can be from 1 through 255 seconds.

You can include this statement at the following hierarchy level:

- **[edit interfaces *interface-name* unit *logical-unit-number* family inet address *address* vrrp-group *group-id*]**

### Modifying the Advertisement Interval in Milliseconds

To modify the time, in milliseconds, between the sending of VRRP advertisement packets, include the **fast-interval** statement:

```
fast-interval milliseconds;
```

The interval can be from 100 through 999 milliseconds.



You can include this statement at the following hierarchy level:

- [edit interfaces *interface-name* unit *logical-unit-number* family (inet | inet6) address *address* (vrrp-group | vrrp-inet6-group) *group-id*]



**NOTE:** Junos OS sets the advertisement interval to 0 in VRRP packets. When you configure VRRP with other vendors' equipment, the *fast-interval* statement works correctly only when the other equipment also has the advertisement interval set to 0 in the VRRP packet. Otherwise, Junos OS interprets other routers' settings as advertisement timer errors.

**Related  
Documentation**

- [Understanding VRRP on page 1774](#)
- [Configuring Basic VRRP Support on page 1792](#)
- [Example: Configuring VRRP for Load Sharing on page 1787](#)

## Configuring VRRP Preemption and Hold Time

- [Configuring VRRP Preemption on page 1796](#)
- [Configuring the Preemption Hold Time on page 1796](#)
- [Overriding the Hold Time on page 1797](#)

### Configuring VRRP Preemption

---

By default, a higher-priority VRRP backup switch preempts a lower-priority master switch. To explicitly enable this behavior, include the following statement:

```
preempt;
```

To prohibit a higher-priority VRRP backup switch from preempting a lower-priority master switch, include the following statement on the lower-priority switch:

```
no-preempt;
```

You can include these statements at the following hierarchy level:

- [edit interfaces *interface-name* unit *logical-unit-number* family inet address *address* vrrp-group *group-id*]

### Configuring the Preemption Hold Time

---

You can also configure a preemption hold time, which is the number of seconds a higher-priority backup router that has just started up waits before preempting the master router. You might want to configure a hold time so that routing protocols or other Junos OS components converge before preemption occurs.

The hold time is applied only on startup. By default, the hold-time value is 0 seconds, meaning that preemption can occur immediately after the backup router starts up.



To modify the preemption hold-time value, configure the following statement:

```
hold-time seconds;
```

The hold time can be from 0 through 3600 seconds.

You can include this statement at the following hierarchy level:

- **[edit interfaces *interface-name* unit *logical-unit-number* family inet address vrrp-group *group-id*] preempt**

### Overriding the Hold Time

You can use the **asymmetric-hold-time** statement to configure a VRRP master to fail over to the backup immediately—without waiting for the preemption hold time to expire—when a tracked route goes down. Otherwise, the master waits for the hold time to expire before it initiates a failover when a tracked route goes down.

When the tracked route comes up again, the new backup (original master) router waits for the preemption hold time to expire before it reasserts mastership.

You can include this statement at the following hierarchy level:

- **[edit protocols vrrp]**

#### Related Documentation

- [Understanding VRRP on page 1774](#)
- [Configuring Basic VRRP Support on page 1792](#)
- [Example: Configuring VRRP for Load Sharing on page 1787](#)

## Configuring a Route to Be Tracked

A VRRP master can track a route and dynamically trigger a new master router election if the route becomes unreachable. To enable this behavior, you must configure a cost that will be subtracted from the priority of the master if the tracked route becomes unreachable. The new priority must be less than the priority of one of the backups so that the backup becomes the new master.

To configure a route to be tracked, include the following statements:

```
track {
  priority-hold-time seconds;
  route prefix/prefix-length routing-instance default priority-cost priority;
}
```

You can include these statements at the following hierarchy level:

- **[edit interfaces *interface-name* unit *logical-unit-number* family inet address *address* vrrp-group *group-id*]**

The **prefix** and **prefix-length** values specify the route to be tracked. The **priority-hold-time** statement is the minimum length of time that must elapse between priority changes. If the priority of the master changes because of a tracking event, the priority hold timer



begins. If another tracking event or manual configuration change occurs while the timer is running, the new priority update is postponed until the timer expires. You might configure the **priority-hold-time** statement to prevent problems that could occur if there were multiple VRRP transitions in a short period of time.

The **priority-cost** option is the value to be subtracted from the VRRP priority when the tracked route goes down. The value can be 1 through 254. The sum of the costs for all tracked interfaces and routes must be less than or equal to the configured priority (so that subtracting all the costs results in a priority equal to or greater than 0).

**Related  
Documentation**

- [Understanding VRRP on page 1774](#)
- [Configuring Basic VRRP Support on page 1792](#)
- [Example: Configuring VRRP for Load Sharing on page 1787](#)
- [Configuring a Logical Interface to Be Tracked on page 1798](#)

## Configuring a Logical Interface to Be Tracked

VRRP can track whether a logical interface is up, down, or not present, and can change the priority of the switch based on the state of the interface, which might trigger a new master election. VRRP can also track the operational speed of a logical interface and update the priority of the switch when the speed crosses a configured threshold. For each VRRP group, you can track as many as 10 logical interfaces.

When interface tracking is enabled on a switch, you cannot assign the switch a priority of 255 to make it the master for the group.

To configure a logical interface to be tracked, include the following statements:

```
track {  
  interface interface-name {  
    bandwidth-threshold bits-per-second priority-cost priority;  
    priority-cost priority;  
  }  
  priority-hold-time seconds;  
}
```

You can include these statements at the following hierarchy level:

- **[edit interfaces *interface-name* unit *logical-unit-number* family inet address *address* vrrp-group *group-id*]**

The interface specified is the interface to be tracked for the VRRP group. The **priority-hold-time** statement is the minimum length of time that must elapse between priority changes. If the priority changes because of a tracking event, the priority hold timer begins. If another tracking event or manual configuration change occurs while the timer is running, the new priority update is postponed until the timer expires. You might configure the **priority-hold-time** statement to prevent problems that could occur if there were multiple VRRP transitions in a short period of time.

The **bandwidth-threshold** statement specifies a threshold for the tracked interface. If the bandwidth of the tracked interface drops below the threshold value, the system subtracts



the bandwidth threshold **priority-cost** value from the VRRP priority for the switch. You can create as many as five **bandwidth-threshold** statements for each tracked interface.

The interface **priority-cost** statement is the value to be subtracted from the VRRP priority when the tracked route goes down. The value can be 1 through 254. The sum of the costs for all tracked interfaces and routes must be less than or equal to the configured priority (so that subtracting all the costs results in a priority equal to or greater than 0).

If you configure tracking for more than one interface, Junos OS subtracts the sum of the priority costs for the tracked interfaces from the VRRP priority if all the tracked interfaces fail. However, if you configure the interface **priority-cost** statement and the bandwidth threshold **priority-cost** statement, they are not added together. The switch uses only one priority cost for a tracked interface, as indicated in [Table 141 on page 1799](#):

**Table 141: Interface State and Priority Cost Usage**

Tracked Interface State	Priority Cost Usage
Down	<b>priority cost</b> <i>priority</i>
Not down; media speed below one or more bandwidth thresholds	Priority-cost of the lowest applicable bandwidth threshold

You must configure an interface priority cost only if you do not configure any bandwidth thresholds. If you do not configure an interface **priority-cost** value and the interface fails, Junos OS subtracts the bandwidth threshold **priority-cost** value of the lowest bandwidth threshold from the priority of the switch.

**Related Documentation**

- [Understanding VRRP on page 1774](#)
- [Configuring Basic VRRP Support on page 1792](#)
- [Example: Configuring VRRP for Load Sharing on page 1787](#)
- [Configuring a Route to Be Tracked on page 1797](#)

## Configuring a Backup to Accept Packets Destined for the Virtual IP Address

By default, a switch configured to be a VRRP backup but acting as the master does not process packets sent to the virtual IP address—that is, packets in which the destination address is the virtual IP address. To configure a backup switch to process packets sent to the virtual IP address while it is acting as the master, include the **accept-data** statement on the backup:

```
accept-data;
```



You can include this statement at the following hierarchy level:

- **[edit interfaces *interface-name* unit *logical-unit-number* family inet address *address* vrrp-group] *group-id***

To explicitly prohibit the backup from accepting packets destined for the virtual IP address while acting as master, include the **no-accept-data** statement:

```
no-accept-data;
```

If you include the **accept-data** statement, configure the connected hosts so that they:

- Process gratuitous ARP requests.
- Do not use packets other than ARP replies to update their ARP cache.

This statement is disabled by default. If you enable it, your configuration does not comply with RFC 3768.

To restrict incoming IP packets to ICMP only, you must configure firewall filters to accept only ICMP packets.

**Related  
Documentation**

- [Understanding VRRP on page 1774](#)
- [Configuring Basic VRRP Support on page 1792](#)
- [Example: Configuring VRRP for Load Sharing on page 1787](#)

## Configuring Passive ARP Learning for VRRP Backups

By default, VRRP backup switches drop ARP requests for the MAC address of the VRRP IP. This means that backups do not learn the ARP mappings (IP address to MAC address mappings) for the hosts sending the requests. If it becomes the master, the configured backup must learn all the entries that were present in the ARP cache of the original master. In environments with many directly attached hosts, the number of ARP entries to learn can be very large. This can cause a significant delay while the backup transitions to the master state, during which traffic transmitted to some of the hosts might be dropped.

Passive ARP learning enables the ARP cache in the backup to learn approximately the same contents as the ARP cache in the master, thus preventing the problem of needing to learn many ARP entries quickly. To enable passive ARP learning, include the **passive-learning** statement at the **[edit system arp]** hierarchy level:

```
[edit system arp]  
passive-learning;
```

We recommend setting passive learning on both the backup and master VRRP switches. Doing so prevents the need to manually configure a master that fails and becomes a backup. While a switch operates as the master, the passive learning configuration has no impact. The configuration takes effect only when a switch operates as a backup.

**Related  
Documentation**

- [Understanding VRRP on page 1774](#)
- [Configuring Basic VRRP Support on page 1792](#)



- [Example: Configuring VRRP for Load Sharing on page 1787](#)

## Configuring the Silent Period

When the state of a VRRP interface changes from down to up, a silent period begins. During this period, any master down events are ignored. Configure the silent period interval to avoid problems that can be caused if incoming VRRP advertisement packets are delayed or interrupted while an interface starts up.

To configure the silent period, include the **startup-silent-period** statement at the **[edit protocols vrrp]** hierarchy level:

```
[edit protocols vrrp]
  startup-silent-period seconds;
```

### Related Documentation

- [Understanding VRRP on page 1774](#)
- [Configuring Basic VRRP Support on page 1792](#)
- [Example: Configuring VRRP for Load Sharing on page 1787](#)

## Configuring Inheritance for a VRRP Group

Junos OS enables you to configure VRRP groups on the various subnets of a VLAN to inherit the state and configuration of one of the groups, which is known as the *active VRRP group*. By configuring inheritance, you can prevent VRRP groups other than the active group from sending out VRRP advertisements. When the **vrrp-inherit-from** configuration statement is included in the configuration, only the active VRRP group from which the other VRRP groups are inheriting the state sends out VRRP advertisements; the groups inheriting the state do not send any VRRP advertisements, because the state is maintained only on the group from which the state is inherited.

If the **vrrp-inherit-from** statement is not configured, each of the VRRP master groups in the various subnets on the VLAN sends out separate VRRP advertisements and adds to the traffic on the VLAN.

To configure inheritance for a VRRP group, include the **vrrp-inherit-from** statement at the **[edit interfaces interface-name unit logical-unit-number family inet address address vrrp-group group-id]**:

```
[edit interfaces interface-name unit logical-unit-number family inet address address
  vrrp-group group-id]
  vrrp-inherit-from vrrp-group;
```

When you configure a group to inherit a state from another group, note the following conditions:

- Both inheriting groups and active groups must be on the same physical interface and logical system. However, the groups need not necessarily be on the same VLAN or logical interface.



- Both inheriting groups and active groups must be on the same routing instances; however, this limitation does not apply for groups on the integrated routing and bridging (IRB) interfaces.

When you include the **vrrp-inherit-from** statement for a VRRP group, the VRRP group inherits the following parameters from the active group:

- **advertise-interval**
- **authentication-key**
- **authentication-type**
- **fast-interval**
- **preempt | no-preempt**
- **priority**
- **track interfaces**
- **track route**

However, you can configure the **accept-data | no-accept-data** statement for the group to specify whether the interface should accept packets destined for the virtual IP address.

**Related  
Documentation**

- [Understanding VRRP on page 1774](#)
- [Configuring Basic VRRP Support on page 1792](#)
- [Example: Configuring VRRP for Load Sharing on page 1787](#)




## Configuration Statements for Graceful Restart

### disable

<b>Syntax</b>	disable;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols (bgp   isis   ldp   ospf   ospf3   pim   rip   ripng   rsvp) <a href="#">graceful-restart</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols (bgp   ldp   ospf   ospf3   pim) <a href="#">graceful-restart</a>],</p> <p>[edit protocols (bgp   isis   isis   ospf   ospf3   ldp   pim   rip   ripng   rsvp) <a href="#">graceful-restart</a>],</p> <p>[edit protocols bgp group <i>group-name</i> <a href="#">graceful-restart</a>],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>ip-address</i> <a href="#">graceful-restart</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols (bgp   ldp   ospf   ospf3   pim) <a href="#">graceful-restart</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <a href="#">graceful-restart</a>],</p> <p>[edit routing-options <a href="#">graceful-restart</a>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	Disable graceful restart.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Enabling Graceful Restart</li> <li>• <a href="#">Configuring Routing Protocols Graceful Restart on page 1781</a></li> <li>• Configuring Graceful Restart for MPLS-Related Protocols</li> <li>• Configuring VPN Graceful Restart</li> <li>• Configuring Logical System Graceful Restart</li> <li>• Graceful Restart Configuration Statements</li> <li>• <a href="#">Configuring Graceful Restart for QFabric Systems on page 1777</a></li> </ul>



## disable (BGP Graceful Restart)

<b>Syntax</b>	disable;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp graceful-restart],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> graceful-restart],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i> graceful-restart],</p> <p>[edit protocols bgp graceful-restart],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i> graceful-restart],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i> graceful-restart]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Disable graceful restart for BGP. Graceful restart allows a routing device undergoing a restart to inform its adjacent neighbors and peers of its condition.
<div>  <p><b>NOTE:</b> If you disable graceful restart at a higher level in the configuration statement hierarchy, it is disabled at lower levels in the hierarchy also. For example, if you disable graceful restart at the [edit protocols bgp group <i>group-name</i>] hierarchy level, it is disabled for all the peers in the group. Therefore, if you want to enable graceful restart for some peers in a group and disable it for other peers in the group, enable graceful restart at the [edit protocols bgp group <i>group-name</i>] hierarchy level and disable graceful restart for each peer at the [edit protocols bgp group <i>group-name</i> neighbor <i>address</i>] hierarchy level.</p> </div>	
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Graceful Restart Options for BGP on page 1781</a></li> <li>• <a href="#">Configuring Graceful Restart for QFabric Systems on page 1777</a></li> <li>• <a href="#">graceful-restart on page 1806</a></li> </ul>



## graceful-restart (Enabling Globally)

<b>Syntax</b>	<pre> graceful-restart {   disable;   helper-disable;   maximum-helper-recovery-time <i>seconds</i>;   maximum-helper-restart-time <i>seconds</i>;   notify-duration <i>seconds</i>;   recovery-time <i>seconds</i>;   restart-duration <i>seconds</i>;   stale-routes-time <i>seconds</i>; }</pre>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-options], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options], [edit routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Configure graceful restart globally to enable the feature. You cannot enable graceful restart for specific protocols unless graceful restart is also enabled globally.</p> <p>For VPNs, the <b>graceful-restart</b> statement allows a router whose VPN control plane is undergoing a restart to continue to forward traffic while recovering its state from neighboring routers.</p> <p>For BGP, if you configure graceful restart after a BGP session has been established, the BGP session restarts and the peers negotiate graceful restart capabilities.</p>
<b>Default</b>	Graceful restart is disabled by default.
<b>Options</b>	The remaining statements are explained separately.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Enabling Graceful Restart</li> <li><a href="#">Configuring Routing Protocols Graceful Restart on page 1781</a></li> <li>Configuring Graceful Restart for MPLS-Related Protocols</li> <li>Configuring VPN Graceful Restart</li> <li>Configuring Logical System Graceful Restart</li> <li>Graceful Restart Configuration Statements</li> <li><a href="#">Configuring Graceful Restart for QFabric Systems on page 1777</a></li> </ul>



## graceful-restart (Protocols BGP)

<b>Syntax</b>	<pre>graceful-restart {   disable;   restart-time seconds;   stale-routes-time seconds; }</pre>
<b>Hierarchy Level</b>	<pre>[edit logical-systems logical-system-name protocols bgp], [edit logical-systems logical-system-name protocols bgp group group-name], [edit logical-systems logical-system-name protocols bgp group group-name   neighbor address], [edit protocols bgp], [edit protocols bgp group group-name], [edit protocols bgp group group-name neighbor address]</pre>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Enable graceful restart for BGP. Graceful restart allows a routing device undergoing a restart to inform its adjacent neighbors and peers of its condition. Graceful restart is disabled by default.</p> <p>To configure the duration of the BGP graceful restart period, include the <b>restart-time</b> statement at the <b>[edit protocols bgp graceful-restart]</b> hierarchy level. To set the length of time the router waits to receive messages from restarting neighbors before declaring them down, include the <b>stale-routes-time</b> statement at the <b>[edit protocols bgp graceful-restart]</b> hierarchy level.</p>



**NOTE:** If you configure graceful restart after a BGP session has been established, the BGP session restarts and the peers negotiate graceful restart capabilities.

For graceful restart to function properly, graceful restart must be enabled at the **[edit routing-instance instance-name routing-options]** or **[edit routing-options]** hierarchy level as well as in the protocol level.

For example:

```
protocols {
  bgp {
    group ext {
      graceful-restart;
    }
  }
}
routing-options {
  graceful-restart;
}
```



Graceful restart is enabled both at the **[edit routing-options]** hierarchy level, as well as at the routing protocol level. If graceful restart is not configured in both sections, the peer might have its route removed after a restart, which is not the intended behavior.

The remaining statements are explained separately.

<b>Required Privilege</b>	routing—To view this statement in the configuration.
<b>Level</b>	routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Graceful Restart Options for BGP on page 1781</a></li><li>• <a href="#">Configuring Graceful Restart for QFabric Systems on page 1777</a></li><li>• Junos OS High Availability Configuration Guide</li></ul>



## graceful-restart (Protocols OSPF)

<b>Syntax</b>	<pre> graceful-restart {   disable;   helper-disable (standard   restart-signaling   both);   no-strict-lsa-checking;   notify-duration <i>seconds</i>;   restart-duration <i>seconds</i>; } </pre>
<b>Hierarchy Level</b>	<pre> [edit logical-systems <i>logical-system-name</i> protocols (<b>ospf</b>   ospf3)], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols (<b>ospf</b>   ospf3)], [edit protocols (<b>ospf</b>   ospf3)], [edit routing-instances <i>routing-instance-name</i> protocols ospf] </pre>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Support for the <b>no-strict-lsa-checking</b> statement introduced in Junos OS Release 8.5.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the helper mode <b>standard</b>, <b>restart-signaling</b>, and <b>both</b> options introduced in Junos OS Release 11.4.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Configure graceful restart for OSPF.</p> <p>Graceful restart allows a routing device to restart with minimal effects to the network, and is enabled for all routing protocols at the <b>[edit routing-options]</b> hierarchy level.</p>
<b>Options</b>	<p><b>disable</b>—Disable graceful restart for OSPF.</p> <p><b>helper-disable (standard   restart-signaling   both)</b>—Disable helper mode for graceful restart. When helper mode is disabled, a device cannot help a neighboring device that is attempting to restart. Beginning with Junos OS Release 11.4, you can configure restart signaling-based helper mode for OSPFv2 graceful restart configurations. The <b>standard</b>, <b>restart-signaling</b>, and <b>both</b> options are only supported for OSPFv2. Specify <b>standard</b> to disable helper mode for standard graceful restart (based on RFC 3623). Specify <b>restart-signaling</b> to disable helper mode for restart signaling-based graceful restart (based on RFC 4811, RFC 4812, and RFC 4813). Specify <b>both</b> to disable helper mode for both standard and restart signaling-based graceful restart. The last committed statement takes precedence over the previously configured statement.</p> <p><b>Default:</b> Helper mode is enabled by default. For OSPFv2, both standard and restart-signaling based helper modes are enabled by default.</p> <p><b>no-strict-lsa-checking</b>—Disable strict OSPF link-state advertisement (LSA) checking to prevent the termination of graceful restart by a helping router. LSA checking is enabled by default.</p>



**NOTE:** The **helper-disable** statement and the **no-strict-lsa-checking** statement cannot be configured at the same time. If you attempt to configure both



statements at the same time, the routing device displays a warning message when you enter the `show protocols (ospf | ospf3)` command.

**notify-duration seconds**—Estimated time needed to send out purged grace LSAs over all the interfaces.

**Range:** 1 through 3600 seconds

**Default:** 30 seconds

**restart-duration seconds**—Estimated time needed to reacquire a full OSPF neighbor from each area.

**Range:** 1 through 3600 seconds

**Default:** 180 seconds


<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Graceful Restart for OSPF on page 3378</a></li> <li>• <a href="#">Example: Configuring the Helper Capability Mode for OSPFv2 Graceful Restart on page 3382</a></li> <li>• <a href="#">Example: Configuring the Helper Capability Mode for OSPFv3 Graceful Restart on page 3386</a></li> <li>• <a href="#">Example: Disabling Strict LSA Checking for OSPF Graceful Restart on page 3389</a></li> <li>• <a href="#">Configuring Graceful Restart for QFabric Systems on page 1777</a></li> <li>• <a href="#">Junos OS High Availability Configuration Guide</a></li> </ul>
------------------------------	---



## helper-disable (OSPF)

---

<b>Syntax</b>	helper-disable < both   restart-signaling   standard >;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols ospf <a href="#">graceful-restart</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols ospf <a href="#">graceful-restart</a> ], [edit protocols ospf <a href="#">graceful-restart</a> ], [edit routing-instances <i>routing-instance-name</i> protocols ospf <a href="#">graceful-restart</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Options <b>both</b> , <b>restart-signaling</b> , and <b>standard</b> introduced in Junos OS Release 11.4. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Disable helper mode for graceful restart. When helper mode is disabled, a router cannot help a neighboring router that is attempting to restart. The last committed statement takes precedence over the previously configured statement.
<b>Default</b>	Helper mode is enabled by default for OSPF.
<b>Options</b>	<b>both</b> —(Optional) Disable helper mode for both standard and restart signaling-based graceful restart.  <b>restart-signaling</b> —(Optional) Disable helper mode for restart signaling-based graceful restart (based on RFC 4811, RFC 4812, and RFC 4813).  <div> <b>NOTE:</b> Restart signaling-based helper mode is not supported for OSPFv3 configurations.</div>  <b>standard</b> —(Optional) Disable helper mode for standard graceful restart (based on RFC 3623).
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Routing Protocols Graceful Restart on page 1781</a></li><li>• <a href="#">Configuring Graceful Restart for MPLS-Related Protocols</a></li><li>• <a href="#">Configuring Graceful Restart for QFabric Systems on page 1777</a></li></ul>



---

## no-strict-lsa-checking

---

<b>Syntax</b>	no-strict-lsa-checking;
<b>Hierarchy Level</b>	[edit protocols (ospf   ospf3) graceful-restart]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.5. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Disable strict OSPF link-state advertisement (LSA) checking to prevent the termination of graceful restart by a helping router.
<b>Default</b>	By default, LSA checking is enabled.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Graceful Restart Options for OSPF and OSPFv3 on page 1781</a></li><li>• <a href="#">Configuring Graceful Restart for QFabric Systems on page 1777</a></li><li>• maximum-neighbor-recovery-time</li><li>• recovery-time</li></ul>



## notify-duration

---

<b>Syntax</b>	notify-duration <i>seconds</i> ;
<b>Hierarchy Level</b>	[edit protocols (ospf   ospf3) <a href="#">graceful-restart</a> ], [edit logical-systems <i>logical-system-name</i> protocols (ospf   ospf3) <a href="#">graceful-restart</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>instance-name</i> protocols (ospf   ospf3) <a href="#">graceful-restart</a> ], [edit routing-instances <i>instance-name</i> protocols (ospf   ospf3) <a href="#">graceful-restart</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.3. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Specify the length of time the router notifies helper OSPF routers that it has completed graceful restart.
<b>Options</b>	<b><i>seconds</i></b> —Length of time in the router notifies helper OSPF routers that it has completed graceful restart. <b>Range:</b> 1 through 3600 <b>Default:</b> 30
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Graceful Restart Options for OSPF and OSPFv3 on page 1781</a></li><li>• <a href="#">Configuring Graceful Restart for QFabric Systems on page 1777</a></li><li>• <a href="#">restart-duration on page 1813</a></li></ul>



## restart-duration

<b>Syntax</b>	<code>restart-duration <i>seconds</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols (isis   ospf   ospf3   pim) <a href="#">graceful-restart</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols (ospf   ospf3   pim) <a href="#">graceful-restart</a>],</p> <p>[edit protocols (esis   isis   ospf   ospf3   pim) <a href="#">graceful-restart</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols (ospf   ospf3   pim) <a href="#">graceful-restart</a>],</p> <p>[edit routing-options <a href="#">graceful-restart</a>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Configure the grace period for graceful restart globally.</p> <p>Additionally, you can individually configure the duration of the graceful restart period for the End System-to-Intermediate System (ES-IS), Intermediate System-to-Intermediate System (IS-IS), Open Shortest Path First (OSPF), and OSPFv3 protocols and for Protocol Independent Multicast (PIM) sparse mode.</p>
<b>Options</b>	<p><b><i>seconds</i></b>—Time for the graceful restart period.</p> <p><b>Range:</b></p> <p>The range of values varies according to whether the graceful restart period is being set globally or for a particular protocol:</p> <ul style="list-style-type: none"> <li>• <b>[edit routing-options graceful-restart]</b> (global setting)—120 through 900</li> <li>• ES-IS—30 through 300</li> <li>• IS-IS—30 through 300</li> <li>• OSPF/OSPFv3—1 through 3600</li> <li>• PIM—30 through 300</li> </ul> <p><b>Default:</b></p> <p>The default value varies according to whether the graceful restart period is being set globally or for a particular protocol:</p> <ul style="list-style-type: none"> <li>• <b>[edit routing-options graceful-restart]</b> (global setting)—300</li> <li>• ES-IS—180</li> <li>• IS-IS—210</li> <li>• OSPF/OSPFv3—180</li> <li>• PIM—60</li> </ul>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>



- Related Documentation**
- Enabling Graceful Restart
  - [Configuring Routing Protocols Graceful Restart on page 1781](#)
  - Configuring Graceful Restart for MPLS-Related Protocols
  - Configuring VPN Graceful Restart
  - Configuring Graceful Restart for VPNs
  - Configuring Logical System Graceful Restart
  - Graceful Restart Configuration Statements
  - [Configuring Graceful Restart for QFabric Systems on page 1777](#)

---

## restart-time (BGP Graceful Restart)

---

<b>Syntax</b>	<code>restart-time <i>seconds</i>;</code>
<b>Hierarchy Level</b>	<code>[edit protocols (bgp   rip   ripng) <a href="#">graceful-restart</a>],</code> <code>[edit logical-systems <i>logical-system-name</i> protocols (bgp   rip   ripng) <a href="#">graceful-restart</a></code> <code>  (<a href="#">Enabling Globally</a>)],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code> <code>  bgp <a href="#">graceful-restart</a>],</code> <code>[edit routing-instances <i>routing-instance-name</i> protocols bgp <a href="#">graceful-restart</a>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 8.3. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure the duration of the BGP, RIP, or next-generation RIP (RIPng) graceful restart period.
<b>Options</b>	<b><i>seconds</i></b> —Length of time for the graceful restart period. <b>Range:</b> 1 through 600 seconds <b>Default:</b> Varies by protocol: <ul style="list-style-type: none"><li>• BGP—120 seconds</li><li>• RIP and RIPng—60 seconds</li></ul>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Graceful Restart Options for BGP on page 1781</a></li><li>• <a href="#">Configuring Graceful Restart Options for RIP and RIPng on page 1785</a></li><li>• <a href="#">Configuring Graceful Restart for QFabric Systems on page 1777</a></li><li>• <a href="#">stale-routes-time on page 1815</a></li></ul>




## stale-routes-time

<b>Syntax</b>	<code>stale-routes-time</code> <i>seconds</i> ;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-routing-name</i> protocols bgp <a href="#">graceful-restart</a> ], [edit logical-systems <i>logical-routing-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <a href="#">graceful-restart</a> ], [edit protocols bgp <a href="#">graceful-restart</a> ], [edit routing-instances <i>routing-instance-name</i> protocols bgp <a href="#">graceful-restart</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.3. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Specify the maximum time that stale routes are kept during a restart. The <b>stale-routes-time</b> statement allows you to set the length of time the routing device waits to receive messages from restarting neighbors before declaring them down.
<b>Options</b>	<b>seconds</b> —Time the router waits to receive messages from restarting neighbors before declaring them down. <b>Range:</b> 1 through 600 seconds <b>Default:</b> 300 seconds
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Graceful Restart Options for BGP on page 1781</a></li> <li>• <a href="#">Configuring Graceful Restart for QFabric Systems on page 1777</a></li> <li>• <a href="#">restart-time (BGP Graceful Restart) on page 1814</a></li> </ul>




## Configuration Statements for VRRP

### accept-data

<b>Syntax</b>	(accept-data   no-accept-data);
<b>Hierarchy Level</b>	<p>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id</i>],</p> <p>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <i>vrrp-inet6-group group-id</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <i>vrrp-inet6-group group-id</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS 11.3 for the QFX Series.</p>
<b>Description</b>	<p>In a Virtual Router Redundancy Protocol (VRRP) configuration, determine whether or not a router that is acting as the master router accepts all packets destined for the virtual IP address.</p> <ul style="list-style-type: none"> <li>• <b>accept-data</b>—Enable the master router to accept all packets destined for the virtual IP address.</li> <li>• <b>no-accept-data</b>—Prevent the master router from accepting packets other than the ARP packets destined for the virtual IP address.</li> </ul>
<b>Default</b>	<p>If the router acting as the master router is the IP address owner or has its priority set to 255, the master router, by default, responds to all packets sent to the virtual IP address. However, if the router acting as the master router does not own the IP address or has its priority set to a value less than 255, the master router responds only to ARP requests.</p>
<div>  <p><b>NOTE:</b></p> <ul style="list-style-type: none"> <li>• If you want to restrict the incoming IP packets to ICMP packets only, you must configure firewall filters to accept only ICMP packets.</li> <li>• If you include the <b>accept-data</b> statement, your routing platform configuration does not comply with RFC 3768 (see section 6.4.3 of RFC 3768, <i>Virtual Router Redundancy Protocol (VRRP)</i>).</li> </ul> </div>	
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Configuring an Interface to Accept Packets Destined for the Virtual IP Address</li> </ul>



## advertise-interval

<b>Syntax</b>	<code>advertise-interval seconds;</code>
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id</i> ], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS 11.3 for the QFX Series.
<b>Description</b>	Configure the interval between Virtual Router Redundancy Protocol (VRRP) IPv4 advertisement packets.  All routers in the VRRP group must use the same advertisement interval.
<div>  <p><b>NOTE:</b> When VRRPv3 is enabled, the <code>advertise-interval</code> statement cannot be used to configure advertisement intervals. Instead, use the <code>fast-interval</code> statement to configure advertisement intervals.</p> </div>	
<b>Options</b>	<p><b>seconds</b>—Interval between advertisement packets.</p> <p><b>Range:</b> 1 through 255 seconds</p> <p><b>Default:</b> 1 second</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Configuring the Advertisement Interval for the VRRP Master Router</li> <li><a href="#">fast-interval on page 1823</a></li> <li>inet6-advertise-interval</li> <li>version-3</li> </ul>




## asymmetric-hold-time

---

<b>Syntax</b>	asymmetric-hold-time;
<b>Hierarchy Level</b>	[edit protocols vrrp]
<b>Release Information</b>	Statement introduced in Junos OS 11.3 for the QFX Series.
<b>Description</b>	<p>Configure a VRRP master to fail over to a backup immediately—without waiting for the preemption hold time to expire—when a tracked route goes down. Otherwise, the master waits for the hold time to expire before it initiates a failover when a tracked route goes down.</p> <p>When the tracked route comes up again, the new backup (original master) router waits for the preemption hold time to expire before it reasserts mastership.</p>
<b>Default</b>	asymmetric-hold-time is disabled.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring VRRP Preemption and Hold Time on page 1796</a></li></ul>



## authentication-key

<b>Syntax</b>	<code>authentication-key key;</code>
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <b>vrrp-group</b> <i>group-id</i> ], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <b>vrrp-group</b> <i>group-id</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS 11.3 for the QFX Series.
<b>Description</b>	<p>Configure a Virtual Router Redundancy Protocol (VRRP) IPv4 authentication key. You also must specify a VRRP authentication scheme by including the <b>authentication-type</b> statement.</p> <p>All routers in the VRRP group must use the same authentication scheme and password.</p>
	<div>  <p><b>NOTE:</b> When VRRPv3 is enabled, the <b>authentication-type</b> and <b>authentication-key</b> statements cannot be configured for any VRRP groups.</p> </div>
<b>Options</b>	<b>key</b> —Authentication password. For simple authentication, it can be 1 through 8 characters long. For Message Digest 5 (MD5) authentication, it can be 1 through 16 characters long. If you include spaces, enclose all characters in quotation marks (" ").
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Configuring VRRP Authentication (IPv4 Only)</li> <li><a href="#">Configuring VRRP Authentication (IPv4 Only) on page 1793</a></li> <li><a href="#">authentication-type on page 1820</a></li> <li>version-3</li> </ul>



## authentication-type

<b>Syntax</b>	<code>authentication-type authentication;</code>
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <b>vrrp-group</b> <i>group-id</i> ], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <b>vrrp-group</b> <i>group-id</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS 11.3 for the QFX Series.
<b>Description</b>	Enable Virtual Router Redundancy Protocol (VRRP) IPv4 authentication and specify the authentication scheme for the VRRP group. If you enable authentication, you must specify a password by including the <b>authentication-key</b> statement.  All routers in the VRRP group must use the same authentication scheme and password.



**NOTE:** When VRRPv3 is enabled, the **authentication-type** and **authentication-key** statements cannot be configured for any VRRP groups.

<b>Options</b>	<p><b>authentication</b>—Authentication scheme:</p> <ul style="list-style-type: none"> <li><b>simple</b>—Use a simple password. The password is included in the transmitted packet, so this method of authentication is relatively insecure.</li> <li><b>md5</b>—Use the MD5 algorithm to create an encoded checksum of the packet. The encoded checksum is included in the transmitted packet. The receiving routing platform uses the authentication key to verify the packet, discarding it if the digest does not match. This algorithm provides a more secure authentication scheme.</li> </ul> <p><b>Default:</b> none (no authentication is performed).</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Configuring VRRP Authentication (IPv4 Only)</li> <li><a href="#">Configuring VRRP Authentication (IPv4 Only) on page 1793</a></li> <li><a href="#">authentication-key on page 1819</a></li> <li>version-3</li> </ul>



## bandwidth-threshold

<b>Syntax</b>	<code>bandwidth-threshold <i>bits-per-second</i> priority-cost <i>priority</i>;</code>
<b>Hierarchy Level</b>	<p>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id</i> <b>track interface</b> <i>interface-name</i>],</p> <p>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <i>vrrp-inet6-group group-id</i> <b>track interface</b> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id</i> <b>track interface</b> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <i>vrrp-inet6-group group-id</i> <b>track interface</b> <i>interface-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.1.</p> <p>Statement introduced in Junos OS 11.3 for the QFX Series.</p>
<b>Description</b>	Specify the bandwidth threshold for Virtual Router Redundancy Protocol (VRRP) logical interface tracking.
<b>Options</b>	<p><b><i>bits-per-second</i></b>—Bandwidth threshold for the tracked interface. When the bandwidth of the tracked interface drops below the specified value, the VRRP group uses the bandwidth threshold priority cost value. You can include up to five bandwidth threshold statements for each interface you track.</p> <p><b>Range:</b> 1 through 10000000000000 bits per second</p> <p><b><i>priority-cost priority</i></b>—The value subtracted from the configured VRRP priority when the tracked interface or route is down to force a new master router election. The sum of all the costs for all interfaces or routes that are tracked must be less than or equal to the configured priority of the VRRP group.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Configuring a Logical Interface to Be Tracked</li> <li><a href="#">Configuring a Logical Interface to Be Tracked on page 1798</a></li> </ul>




## failover-delay

---

<b>Syntax</b>	<code>failover-delay <i>milliseconds</i>;</code>
<b>Hierarchy Level</b>	[edit protocols vrrp]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	<p>If you configure multiple VRRP groups on an interface (using multiple VLANs), traffic for some of the groups might be briefly dropped if a failover occurs. This can happen because the new master must send gratuitous ARP replies for each VRRP group to update the ARP tables in the connected devices, and there is a short delay between each gratuitous ARP reply. Traffic sent by devices that have not yet received the gratuitous ARP reply is dropped (until the device receives the reply and learns the MAC address of the new master).</p> <p>If you configure a failover delay, the new master delays sending gratuitous ARP replies for the period that you set. This allows the new master to send the ARP replies for all of the VRRP groups simultaneously.</p>
<b>Options</b>	<p><i>milliseconds</i>—Specify the failover delay time, in milliseconds.</p> <p><b>Range:</b> 50 through 2000</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>



## fast-interval

<b>Syntax</b>	<code>fast-interval milliseconds;</code>
<b>Hierarchy Level</b>	<p>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id</i>],</p> <p>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <i>vrrp-inet6-group group-id</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <i>vrrp-inet6-group group-id</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Configure the interval, in milliseconds, between Virtual Router Redundancy Protocol (VRRP) advertisement packets.</p> <p>All routers in the VRRP group must use the same advertisement interval.</p>
<b>Options</b>	<p><i>milliseconds</i>—Interval between advertisement packets.</p> <p><b>Range:</b> 10 through 40,950 milliseconds (range extended from 100–999 to 10–40,950 in Junos OS Release 12.2).</p>
<div>  <p><b>NOTE:</b> When configuring VRRP for IPv4, if you have chosen not to enable VRRPv3, you cannot set a value less than 100 for <i>fast-interval</i>. Commit check fails if a value less than 100 is configured.</p> </div>	
<b>Default:</b> 1 second	
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Configuring the Advertisement Interval for the VRRP Master Router</li> <li><a href="#">Configuring the Advertisement Interval for the VRRP Master on page 1795</a></li> <li><a href="#">advertise-interval on page 1817</a></li> <li><a href="#">advertise-interval on page 1817</a></li> <li>inet6-advertise-interval</li> <li>version-3</li> </ul>



## hold-time (VRRP)

---

<b>Syntax</b>	<code>hold-time seconds;</code>
<b>Hierarchy Level</b>	<code>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id preempt</i>],</code> <code>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <i>vrrp-inet6-group group-id preempt</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id preempt</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <i>vrrp-inet6-group group-id preempt</i>]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS 11.3 for the QFX Series.
<b>Description</b>	In a Virtual Router Redundancy Protocol (VRRP) configuration, set the hold time before a higher-priority backup router preempts the master router.
<b>Default</b>	VRRP preemption is not timed.
<b>Options</b>	<b>seconds</b> —Hold-time period. <b>Range:</b> 0 through 3600 seconds <b>Default:</b> 0 seconds (VRRP preemption is not timed.)
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Configuring a Backup Router to Preempt the Master Router</li><li><a href="#">Configuring VRRP Preemption and Hold Time on page 1796</a></li></ul>




## interface (VRRP Group)

<b>Syntax</b>	<pre>interface <i>interface-name</i> {     <b>bandwidth-threshold</b> <i>bits-per-second</i> <i>priority-cost</i> <i>priority</i>;     <b>priority-cost</b> <i>priority</i>; }</pre>
<b>Hierarchy Level</b>	<p>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <b>vrrp-group</b> <i>group-id</i> <b>track</b>],</p> <p>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <b>vrrp-inet6-group</b> <i>group-id</i> <b>track</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <b>vrrp-group</b> <i>group-id</i> <b>track</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <b>vrrp-inet6-group</b> <i>group-id</i> <b>track</b>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p><b>bandwidth-threshold</b> statement added in Junos OS Release 8.1.</p> <p>Statement introduced in Junos OS 11.3 for the QFX Series.</p>
<b>Description</b>	Enable logical interface tracking for a Virtual Router Redundancy Protocol (VRRP) group.
<b>Options</b>	<p><b><i>interface-name</i></b>—Interface to be tracked for this VRRP group.</p> <p><b>Range:</b> 1 through 10 interfaces</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Configuring a Logical Interface to Be Tracked</li> <li><a href="#">Configuring a Logical Interface to Be Tracked on page 1798</a></li> <li>Junos Services Interfaces Configuration Release 11.2</li> </ul>



## preempt (VRRP)

<b>Syntax</b>	(preempt   no-preempt) { hold-time seconds; }
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> vrrp-group <i>group-id</i> ], [edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> vrrp-inet6-group <i>group-id</i> ], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> vrrp-group <i>group-id</i> ], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> vrrp-inet6-group <i>group-id</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS 11.3 for the QFX Series.
<b>Description</b>	In a Virtual Router Redundancy Protocol (VRRP) configuration, determine whether or not a backup router can preempt a master router: <ul style="list-style-type: none"> <li>• <b>preempt</b>—Allow the master router to be preempted.</li> </ul> <div style="margin-top: 10px;">  <p><b>NOTE:</b> By default, a higher-priority backup router can preempt a lower-priority master router.</p> </div> <ul style="list-style-type: none"> <li>• <b>no-preempt</b>—Prohibit the preemption of the master router. When <b>no-preempt</b> is configured, the backup router cannot preempt the master router even if the backup router has a higher priority.</li> </ul> <p>The remaining statement is explained separately.</p>
<b>Default</b>	By default the <b>preempt</b> statement is enabled, and a higher-priority backup router preempts a lower-priority master router even if the <b>preempt</b> statement is not explicitly configured.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring a Backup Router to Preempt the Master Router</a></li> <li>• <a href="#">Configuring VRRP Preemption and Hold Time on page 1796</a></li> </ul>



## priority (Protocols VRRP)

<b>Syntax</b>	<code>priority <i>priority</i>;</code>
<b>Hierarchy Level</b>	<p>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id</i>],</p> <p>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <i>vrrp-inet6-group group-id</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <i>vrrp-inet6-group group-id</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS 11.3 for the QFX Series.</p>
<b>Description</b>	Configure a Virtual Router Redundancy Protocol (VRRP) router's priority for becoming the master default router. The router with the highest priority within the group becomes the master.
<b>Options</b>	<p><b>priority</b>—Router's priority for being elected to be the master router in the VRRP group. A larger value indicates a higher priority for being elected.</p> <p><b>Range:</b> 1 through 255</p> <p><b>Default:</b> 100 (for backup routers)</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Configuring Basic VRRP Support</li> <li><a href="#">Configuring Basic VRRP Support on page 1792</a></li> </ul>




## priority-cost (VRRP)

---

<b>Syntax</b>	<code>priority-cost priority;</code>
<b>Hierarchy Level</b>	<code>[edit interfaces interface-name unit logical-unit-number family inet address address vrrp-group group-id track interface interface-name],</code> <code>[edit interfaces interface-name unit logical-unit-number family inet6 address address vrrp-inet6-group group-id track interface interface-name],</code> <code>[edit logical-systems logical-system-name interfaces interface-name unit logical-unit-number family inet address address vrrp-group group-id track interface interface-name],</code> <code>[edit logical-systems logical-system-name interfaces interface-name unit logical-unit-number family inet6 address address vrrp-inet6-group group-id track interface interface-name]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.2 for ACX2000 Universal Access Routers.
<b>Description</b>	Configure a Virtual Router Redundancy Protocol (VRRP) router's priority cost for becoming the master default router. The router with the highest priority within the group becomes the master.
<b>Options</b>	<b>priority</b> —The value subtracted from the configured VRRP priority when the tracked interface or route is down to force a new master router election. The sum of all the costs for all interfaces or routes that are tracked must be less than or equal to the configured priority of the VRRP group. <b>Range:</b> 1 through 254
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Configuring a Logical Interface to Be Tracked</li><li><a href="#">Configuring a Logical Interface to Be Tracked on page 1798</a></li></ul>



## priority-hold-time

<b>Syntax</b>	<code>priority-hold-time seconds;</code>
<b>Hierarchy Level</b>	<p>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id track</i>],</p> <p>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <i>vrrp-inet6-group group-id track</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id track</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <i>vrrp-inet6-group group-id track</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.1.</p> <p>Statement introduced in Junos OS 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Configure a Virtual Router Redundancy Protocol (VRRP) router's priority hold time to define the minimum length of time that must elapse between dynamic priority changes. If the dynamic priority changes because of a tracking event, the priority hold timer begins running. If another tracking event or manual configuration change occurs while the timer is running, the new dynamic priority update is postponed until the timer expires.</p>
<div>  <p><b>NOTE:</b> When the track feature is configured, and if VRRP should pre-empt due to the tracking interface or route transition, any configured pre-empt hold time will be ignored. VRRP master will pre-empt according to the configuration of the priority-hold time.</p> </div>	
<b>Options</b>	<p><b>seconds</b>—Minimum length of time that must elapse between dynamic priority changes.</p> <p><b>Range:</b> 0through 3600 seconds</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Configuring a Logical Interface to Be Tracked</li> <li><a href="#">Configuring a Logical Interface to Be Tracked on page 1798</a></li> </ul>



## route (Interfaces)

---

<b>Syntax</b>	<code>route <i>prefix</i> routing-instance <i>instance-name</i> priority-cost <i>priority</i>;</code>
<b>Hierarchy Level</b>	<code>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id track</i>],</code> <code>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <i>vrrp-inet6-group group-id track</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id track</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <i>vrrp-inet6-group group-id track</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 9.0. Statement introduced in Junos OS 11.3 for QFX Series. Statement introduced in Junos OS 12.1 for EX Series switches.
<b>Description</b>	Enable route tracking for a Virtual Router Redundancy Protocol (VRRP) group.
<b>Options</b>	<p><b><i>prefix</i></b>—Route to be tracked for this VRRP group.</p> <p><b><i>priority-cost priority</i></b>—The value subtracted from the configured VRRP priority when the tracked interface or route is down, forcing a new master router election. The sum of all the costs for all interfaces or routes that are tracked must be less than or equal to the configured priority of the VRRP group.</p> <p><b><i>routing-instance instance-name</i></b>—Routing instance in which the route is to be tracked. If the route is in the default, or global, routing instance, the value for <b><i>instance-name</i></b> must be <b>default</b>.</p>
<b>Required Privilege Level</b>	<b>interface</b> —To view this statement in the configuration. <b>interface-control</b> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Configuring a Route to Be Tracked</li><li><a href="#">Configuring a Route to Be Tracked on page 1797</a></li></ul>



---

## startup-silent-period

---

<b>Syntax</b>	<code>startup-silent-period <i>seconds</i>;</code>
<b>Hierarchy Level</b>	[edit protocols vrrp]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS 11.3 for the QFX Series.
<b>Description</b>	Instruct the system to ignore the Master Down Event when an interface transitions from the down state to the up state. This statement is used to avoid incorrect error alarms caused by the delay or interruption of incoming Virtual Router Redundancy Protocol (VRRP) advertisement packets during the interface startup phase.
<b>Options</b>	<b><i>seconds</i></b> —Number of seconds for the startup period. <b>Default:</b> 4 seconds <b>Range:</b> 1 through 2000 seconds
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Configuring the Startup Period for VRRP Operations</li><li><a href="#">Configuring the Startup Period for VRRP Operations on page 1794</a></li></ul>



## traceoptions

**Syntax** traceoptions {  
     file <filename> <files number> <match regular-expression> <microsecond-stamp>  
         <size size> <world-readable | no-world-readable>;  
     flag flag;  
     no-remote-trace;  
 }

**Hierarchy Level** [edit protocols vrrp]

**Release Information** Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Define tracing operations for the Virtual Router Redundancy Protocol (VRRP) process.

To specify more than one tracing operation, include multiple **flag** statements.

By default, VRRP logs the error, dcd configuration, and routing socket events in a file in the directory **/var/log**.



**NOTE:** The traceoptions statement is not supported on a QFabric system.

**Default** If you do not include this statement, no VRRP-specific tracing operations are performed.

**Options** **filename filename**—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory **/var/log**. By default, VRRP tracing output is placed in the file **vrrpd**.

**files number**—(Optional) Maximum number of trace files. When a trace file named **trace-file** reaches its maximum size, it is renamed **trace-file.0**, then **trace-file.1**, and so on, until the maximum number of trace files is reached. When the maximum number is reached, the oldest trace file is overwritten.

**Range:** 0 through 4,294,967,296 files

**Default:** 3 files

If you specify a maximum number of files, you also must specify a maximum file size with the **size** option.

**flag flag**—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements. These are the VRRP-specific tracing options:

- **all**—All VRRP tracing operations
- **database**—Database changes
- **general**—General events
- **interfaces**—Interface changes



- **normal**—Normal events
- **packets**—Packets sent and received
- **state**—State transitions
- **timer**—Timer events

**match *regex***—(Optional) Refine the output to include only those lines that match the given regular expression.

**microsecond-stamp**—(Optional) Provide a timestamp with microsecond granularity.

**no-world-readable**—Restrict users from reading the log file.

**size *size***—(Optional) Maximum size of each trace file, in kilobytes, megabytes, or gigabytes. When a trace file named ***trace-file*** reaches this size, it is renamed ***trace-file.0***. When the ***trace-file*** again reaches its maximum size, ***trace-file.0*** is renamed ***trace-file.1*** and ***trace-file*** is renamed ***trace-file.0***. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

**Syntax:** *xk* to specify KB, *xm* to specify MB, or *xg* to specify GB

**Range:** 10 KB through the maximum file size supported on your routing platform

**Default:** 1 MB

If you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

**world-readable**—Allow users to read the log file.

<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Tracing VRRP Operations</li> </ul>



## track (VRRP)

---

<b>Syntax</b>	<pre>track {     interface <i>interface-name</i> {         bandwidth-threshold <i>bits-per-second</i> priority-cost <i>priority</i>;         priority-cost <i>priority</i>;     }     priority-hold-time <i>seconds</i>;     route <i>prefix/prefix-length</i> routing-instance <i>instance-name</i> priority-cost <i>priority</i>; }</pre>
<b>Hierarchy Level</b>	<p>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id</i>],</p> <p>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <i>vrrp-inet6-group group-id</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6 address <i>address</i> <i>vrrp-inet6-group group-id</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p><b>priority-hold-time</b> statement added in Junos OS Release 8.1.</p> <p><b>route</b> statement added in Junos OS Release 9.0.</p> <p>Statement introduced in Junos OS 11.3 for the QFX Series.</p>
<b>Description</b>	Enable logical interface tracking, route tracking, or both, for a Virtual Router Redundancy Protocol (VRRP) group.
<b>Options</b>	The remaining statements are described separately.
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Configuring a Logical Interface to Be Tracked</li><li>Configuring a Route to Be Tracked</li><li><a href="#">Configuring a Logical Interface to Be Tracked on page 1798</a></li><li><a href="#">Configuring a Route to Be Tracked on page 1797</a></li></ul>



## virtual-address

---

<b>Syntax</b>	<code>virtual-address [ <i>addresses</i> ];</code>
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id</i> ], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet address <i>address</i> <i>vrrp-group group-id</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS 11.3 for the QFX Series.
<b>Description</b>	Configure the addresses of the virtual routers in a Virtual Router Redundancy Protocol (VRRP) IPv4 or IPv6 group. You can configure up to eight addresses.
<b>Options</b>	<b><i>addresses</i></b> —Addresses of one or more virtual routers. Do not include a prefix length. If the address is the same as the interface's physical address, the interface becomes the master virtual router for the group.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Configuring Basic VRRP Support</li> <li><a href="#">Configuring Basic VRRP Support on page 1792</a></li> </ul>



## vrrp-group

<b>Syntax</b>	<pre> vrrp-group group-id {   (accept-data   no-accept-data);   advertise-interval seconds;   authentication-key key;   authentication-type authentication;   fast-interval milliseconds;   (preempt   no-preempt) {     hold-time seconds;   }   priority number;   track {     interface interface-name {       bandwidth-threshold bits-per-second priority-cost priority;       priority-cost priority;     }     priority-hold-time seconds;     route prefix/prefix-length routing-instance instance-name priority-cost priority;   }   virtual-address [ addresses ];   vrrp-inherit-from vrrp-group; } </pre>
<b>Hierarchy Level</b>	<pre> [edit interfaces interface-name unit logical-unit-number family inet address address], [edit logical-systems logical-system-name interfaces interface-name unit logical-unit-number family inet address address] </pre>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS 11.3 for the QFX Series.</p>
<b>Description</b>	Configure a Virtual Router Redundancy Protocol (VRRP) IPv4 group.
<b>Options</b>	<p><b>group-id</b>—VRRP group identifier. If you enable MAC source address filtering on the interface, you must include the virtual MAC address in the list of source MAC addresses that you specify in the <b>source-address-filter</b> statement. MAC addresses ranging from <b>00:00:5e:00:01:00</b> through <b>00:00:5e:00:01:ff</b> are reserved for VRRP, as defined in RFC 2338. The VRRP group number must be the decimal equivalent of the last hexadecimal byte of the virtual MAC address.</p> <p><b>Range:</b> 0 through 255</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Configuring Basic VRRP Support</li> <li>Example: Configuring VRRP</li> <li><a href="#">Configuring Basic VRRP Support on page 1792</a></li> <li><a href="#">Example: Configuring VRRP for Load Sharing on page 1787</a></li> </ul>



- vrrp-inet6-group







# Administration

- [Operational Mode Commands for Graceful Restart on page 1839](#)
- [Operational Mode Commands for Nonstop Software Upgrade on page 1863](#)
- [Operational Mode Commands for VRRP on page 1895](#)

## Operational Mode Commands for Graceful Restart

---

- [Verifying Graceful Restart Operation on page 1839](#)

### Verifying Graceful Restart Operation

This topic contains the following sections:

- [Graceful Restart Operational Mode Commands on page 1839](#)
- [Verifying BGP Graceful Restart on page 1840](#)
- [Verifying IS-IS and OSPF Graceful Restart on page 1840](#)
- [Verifying CCC and TCC Graceful Restart on page 1841](#)

### Graceful Restart Operational Mode Commands

---

To verify proper operation of graceful restart, use the following commands:

- **show bgp neighbor** (for BGP graceful restart)
- **show log** (for IS-IS and OSPF/OSPFv3 graceful restart)
- **show (ospf | ospfv3) overview** (for OSPF/OSPFv3 graceful restart)
- **show rsvp neighbor detail** (for RSVP graceful restart—helper router)
- **show rsvp version** (for RSVP graceful restart—restarting router)
- **show ldp session detail** (for LDP graceful restart)
- **show connections** (for CCC and TCC graceful restart)
- **show route instance detail** (for Layer 3 VPN graceful restart and for any protocols using graceful restart in a routing instance)
- **show route protocol l2vpn** (for Layer 2 VPN graceful restart)



For more information about these commands and a description of their output fields, see the Junos OS Operational Mode Commands.

### Verifying BGP Graceful Restart

---

To view graceful restart information for BGP sessions, use the **show bgp neighbor** command:

```
user@PE1> show bgp neighbor 192.255.10.1
Peer: 192.255.10.1+179 AS 64595 Local: 192.255.5.1+1106 AS 64595
  Type: Internal   State: Established   Flags: <>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ static ]
  Options:<Preference LocalAddress HoldTime GracefulRestart Damping PeerAS Refresh>

  Local Address: 192.255.5.1 Holdtime: 90 Preference: 170
  IPsec SA Name: hope
  Number of flaps: 0
  Peer ID: 192.255.10.1      Local ID: 192.255.5.1      Active Holdtime: 90
  Keepalive Interval: 30
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 180
  Stale routes from peer are kept for: 180
  Restart time requested by this peer: 300
  NLRI that peer supports restart for: inet-unicast
  NLRI that peer saved forwarding for: inet-unicast
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Table inet.0 Bit: 10000
  RIB State: restart is complete
  Send state: in sync
  Active prefixes: 0
  Received prefixes: 0
  Suppressed due to damping: 0
  Last traffic (seconds): Received 19   Sent 19   Checked 19
  Input messages: Total 2      Updates 1      Refreshes 0      Octets 42
  Output messages: Total 3      Updates 0      Refreshes 0      Octets 116
  Output Queue[0]: 0
```

### Verifying IS-IS and OSPF Graceful Restart

---

To view graceful restart information for IS-IS and OSPF, configure traceoptions (see [“Tracking Graceful Restart Events” on page 1781](#)).

Here is the output of a traceoptions log from an OSPF restarting router:

```
Oct  8 05:20:12 Restart mode - sending grace lsas
Oct  8 05:20:12 Restart mode - estimated restart duration timer triggered
Oct  8 05:20:13 Restart mode - Sending more grace lsas
```



Here is the output of a traceoptions log from an OSPF helper router:

```
Oct  8 05:20:14 Helper mode for neighbor 192.255.5.1
Oct  8 05:20:14 Received multiple grace lsa from 192.255.5.1
```

### Verifying CCC and TCC Graceful Restart

To view graceful restart information for CCC and TCC connections, use the **show connections** command. The following example assumes four remote interface CCC connections between CE1 and CE2:

```
user@PE1> show connections
CCC and TCC connections [Link Monitoring On]
Legend for status (St)
UN -- uninitialized
NP -- not present
WE -- wrong encapsulation
DS -- disabled
Dn -- down
-> -- only outbound conn is up
<- -- only inbound conn is up
Up -- operational
RmtDn -- remote CCC down
Restart -- restarting

Legend for connection types
if-sw: interface switching
rmt-if: remote interface switching
lsp-sw: LSP switching

Legend for circuit types
intf -- interface
tlsp -- transmit LSP
rlsp -- receive LSP
```

#### CCC Graceful restart : Restarting

Connection/Circuit	Type	St	Time last up	# Up trans
CE1-CE2-0	rmt-if	Restart	-----	0
fe-1/1/0.0	intf	Up		
PE1-PE2-0	tlsp	Up		
PE2-PE1-0	rlsp	Up		
CE1-CE2-1	rmt-if	Restart	-----	0
fe-1/1/0.1	intf	Up		
PE1-PE2-1	tlsp	Up		
PE2-PE1-1	rlsp	Up		
CE1-CE2-2	rmt-if	Restart	-----	0
fe-1/1/0.2	intf	Up		
PE1-PE2-2	tlsp	Up		
PE2-PE1-2	rlsp	Up		
CE1-CE2-3	rmt-if	Restart	-----	0
fe-1/1/0.3	intf	Up		
PE1-PE2-3	tlsp	Up		
PE2-PE1-3	rlsp	Up		

- Related Documentation**
- [Graceful Restart Concepts on page 1769](#)
  - [Configuring Graceful Restart for QFabric Systems on page 1777](#)



## show bgp neighbor

---

<b>Syntax</b>	<pre>show bgp neighbor &lt;exact-instance <i>instance-name</i>&gt; &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;neighbor-address&gt; &lt;orf (detail   <i>neighbor-address</i>)</pre>
<b>Syntax (EX Series Switch and QFX Series)</b>	<pre>show bgp neighbor &lt;instance <i>instance-name</i>&gt; &lt;exact-instance <i>instance-name</i>&gt; &lt;neighbor-address&gt; &lt;orf (<i>neighbor-address</i>   detail)</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p> <p><b>orf</b> option introduced in Junos OS Release 9.2.</p> <p><b>exact-instance</b> option introduced in Junos OS Release 11.4.</p>
<b>Description</b>	Display information about BGP peers.
<b>Options</b>	<p><b>none</b>—Display information about all BGP peers.</p> <p><b>exact-instance <i>instance-name</i></b>—(Optional) Display information for the specified instance only.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display information about BGP peers for all routing instances whose name begins with this string (for example, <b>cust1</b>, <b>cust11</b>, and <b>cust111</b> are all displayed when you run the <b>show bgp neighbor instance cust1</b> command).</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>neighbor-address</b>—(Optional) Display information for only the BGP peer at the specified IP address.</p> <p><b>orf (detail   <i>neighbor-address</i>)</b>—(Optional) Display outbound route-filtering information for all BGP peers or only for the BGP peer at the specified IP address. The default is to display brief output. Use the <b>detail</b> option to display detailed output.</p>
<b>Additional Information</b>	For information about the <b>local-address</b> , <b>nlri</b> , <b>hold-time</b> , and <b>preference</b> statements, see the Junos OS Routing Protocols Configuration Guide.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">clear bgp neighbor on page 3073</a></li></ul>



**List of Sample Output** [show bgp neighbor on page 1850](#)  
[show bgp neighbor \(CLNS\) on page 1850](#)  
[show bgp neighbor \(Layer 2 VPN\) on page 1851](#)  
[show bgp neighbor \(Layer 3 VPN\) on page 1853](#)  
[show bgp neighbor neighbor-address on page 1854](#)  
[show bgp neighbor neighbor-address on page 1854](#)  
[show bgp neighbor orf neighbor-address detail on page 1855](#)

**Output Fields** [Table 142 on page 1843](#) describes the output fields for the **show bgp neighbor** command. Output fields are listed in the approximate order in which they appear.

**Table 142: show bgp neighbor Output Fields**

Field Name	Field Description
<b>Peer</b>	Address of the BGP neighbor. The address is followed by the neighbor port number.
<b>AS</b>	AS number of the peer.
<b>Local</b>	Address of the local routing device. The address is followed by the peer port number.
<b>Type</b>	Type of peer: <b>Internal</b> or <b>External</b> .
<b>State</b>	<p>Current state of the BGP session:</p> <ul style="list-style-type: none"> <li>• <b>Active</b>—BGP is initiating a transport protocol connection in an attempt to connect to a peer. If the connection is successful, BGP sends an Open message.</li> <li>• <b>Connect</b>—BGP is waiting for the transport protocol connection to be completed.</li> <li>• <b>Established</b>—The BGP session has been established, and the peers are exchanging update messages.</li> <li>• <b>Idle</b>—This is the first stage of a connection. BGP is waiting for a Start event.</li> <li>• <b>OpenConfirm</b>—BGP has acknowledged receipt of an open message from the peer and is waiting to receive a keepalive or notification message.</li> <li>• <b>OpenSent</b>—BGP has sent an open message and is waiting to receive an open message from the peer.</li> </ul>
<b>Flags</b>	<p>Internal BGP flags:</p> <ul style="list-style-type: none"> <li>• <b>Aggregate Label</b>—BGP has aggregated a set of incoming labels (labels received from the peer) into a single forwarding label.</li> <li>• <b>CleanUp</b>—The peer session is being shut down.</li> <li>• <b>Delete</b>—This peer has been deleted.</li> <li>• <b>Idled</b>—This peer has been permanently idled.</li> <li>• <b>ImportEval</b>—At the last commit operation, this peer was identified as needing to reevaluate all received routes.</li> <li>• <b>Initializing</b>—The peer session is initializing.</li> <li>• <b>SendRtn</b>—Messages are being sent to the peer.</li> <li>• <b>Sync</b>—This peer is synchronized with the rest of the peer group.</li> <li>• <b>TryConnect</b>—Another attempt is being made to connect to the peer.</li> <li>• <b>Unconfigured</b>—This peer is not configured.</li> <li>• <b>WriteFailed</b>—An attempt to write to this peer failed.</li> </ul>



Table 142: show bgp neighbor Output Fields (*continued*)

Field Name	Field Description
<b>Last state</b>	<p>Previous state of the BGP session:</p> <ul style="list-style-type: none"> <li>• <b>Active</b>—BGP is initiating a transport protocol connection in an attempt to connect to a peer. If the connection is successful, BGP sends an Open message.</li> <li>• <b>Connect</b>—BGP is waiting for the transport protocol connection to be completed.</li> <li>• <b>Established</b>—The BGP session has been established, and the peers are exchanging update messages.</li> <li>• <b>Idle</b>—This is the first stage of a connection. BGP is waiting for a Start event.</li> <li>• <b>OpenConfirm</b>—BGP has acknowledged receipt of an open message from the peer and is waiting to receive a keepalive or notification message.</li> <li>• <b>OpenSent</b>—BGP has sent an open message and is waiting to receive an open message from the peer.</li> </ul>
<b>Last event</b>	<p>Last activity that occurred in the BGP session:</p> <ul style="list-style-type: none"> <li>• <b>Closed</b>—The BGP session closed.</li> <li>• <b>ConnectRetry</b>—The transport protocol connection failed, and BGP is trying again to connect.</li> <li>• <b>HoldTime</b>—The session ended because the hold timer expired.</li> <li>• <b>KeepAlive</b>—The local routing device sent a BGP keepalive message to the peer.</li> <li>• <b>Open</b>—The local routing device sent a BGP open message to the peer.</li> <li>• <b>OpenFail</b>—The local routing device did not receive an acknowledgment of a BGP open message from the peer.</li> <li>• <b>RecvKeepAlive</b>—The local routing device received a BGP keepalive message from the peer.</li> <li>• <b>RecvNotify</b>—The local routing device received a BGP notification message from the peer.</li> <li>• <b>RecvOpen</b>—The local routing device received a BGP open message from the peer.</li> <li>• <b>RecvUpdate</b>—The local routing device received a BGP update message from the peer.</li> <li>• <b>Start</b>—The peering session started.</li> <li>• <b>Stop</b>—The peering session stopped.</li> <li>• <b>TransportError</b>—A TCP error occurred.</li> </ul>
<b>Last error</b>	<p>Last error that occurred in the BGP session:</p> <ul style="list-style-type: none"> <li>• <b>Cease</b>—An error occurred, such as a version mismatch, that caused the session to close.</li> <li>• <b>Finite State Machine Error</b>—In setting up the session, BGP received a message that it did not understand.</li> <li>• <b>Hold Time Expired</b>—The session's hold time expired.</li> <li>• <b>Message Header Error</b>—The header of a BGP message was malformed.</li> <li>• <b>Open Message Error</b>—A BGP open message contained an error.</li> <li>• <b>None</b>—No errors occurred in the BGP session.</li> <li>• <b>Update Message Error</b>—A BGP update message contained an error.</li> </ul>
<b>Export</b>	Name of the export policy that is configured on the peer.
<b>Import</b>	Name of the import policy that is configured on the peer.



Table 142: show bgp neighbor Output Fields (*continued*)

Field Name	Field Description
<b>Options</b>	Configured BGP options: <ul style="list-style-type: none"> <li>• <b>AddressFamily</b>—Configured address family: <b>inet</b> or <b>inet-vpn</b>.</li> <li>• <b>AuthKeyChain</b>—Authentication key change is enabled.</li> <li>• <b>DropPathAttributes</b>—Certain path attributes are configured to be dropped from neighbor updates during inbound processing.</li> <li>• <b>GracefulRestart</b>—Graceful restart is configured.</li> <li>• <b>HoldTime</b>—Hold time configured with the <b>hold-time</b> statement. The hold time is three times the interval at which keepalive messages are sent.</li> <li>• <b>IgnorePathAttributes</b>—Certain path attributes are configured to be ignored in neighbor updates during inbound processing.</li> <li>• <b>Local Address</b>—Address configured with the <b>local-address</b> statement.</li> <li>• <b>Multihop</b>—Allow BGP connections to external peers that are not on a directly connected network.</li> <li>• <b>NLRI</b>—Configured MBGP state for the BGP group: <b>multicast</b>, <b>unicast</b>, or both if you have configured <b>nlri any</b>.</li> <li>• <b>Peer AS</b>—Configured peer autonomous system (AS).</li> <li>• <b>Preference</b>—Preference value configured with the <b>preference</b> statement.</li> <li>• <b>Refresh</b>—Configured to refresh automatically when the policy changes.</li> <li>• <b>Rib-group</b>—Configured routing table group.</li> </ul>
<b>Path-attributes dropped</b>	Path attribute codes that are dropped from neighbor updates.
<b>Path-attributes ignored</b>	Path attribute codes that are ignored during neighbor updates.
<b>Authentication key change</b>	(appears only if the <b>authentication-keychain</b> statement has been configured) Name of the authentication keychain enabled.
<b>Authentication algorithm</b>	(appears only if the <b>authentication-algorithm</b> statement has been configured) Type of authentication algorithm enabled: <b>hmac</b> or <b>md5</b> .
<b>Address families configured</b>	Names of configured address families for the VPN.
<b>Local Address</b>	Address of the local routing device.
<b>Remove-private options</b>	Options associated with the <b>remove-private</b> statement.
<b>Holdtime</b>	Hold time configured with the <b>hold-time</b> statement. The hold time is three times the interval at which keepalive messages are sent.
<b>Flags for NLRI inet-label-unicast</b>	Flags related to labeled-unicast: <ul style="list-style-type: none"> <li>• <b>TrafficStatistics</b>—Collection of statistics for labeled-unicast traffic is enabled.</li> </ul>



Table 142: show bgp neighbor Output Fields (*continued*)

Field Name	Field Description
<b>Traffic statistics</b>	Information about labeled-unicast traffic statistics: <ul style="list-style-type: none"> <li>• <b>Options</b>—Options configured for collecting statistics about labeled-unicast traffic.</li> <li>• <b>File</b>—Name and location of statistics log files.</li> <li>• <b>size</b>—Size of all the log files, in bytes.</li> <li>• <b>files</b>—Number of log files.</li> </ul>
<b>Traffic Statistics Interval</b>	Time between sample periods for labeled-unicast traffic statistics, in seconds.
<b>Preference</b>	Preference value configured with the <b>preference</b> statement.
<b>Outbound Timer</b>	Time for which the route is available in Junos OS routing table before it is exported to BGP. This field is displayed in the output only if the <b>out-delay</b> parameter is configured to a non-zero value.
<b>Number of flaps</b>	Number of times the BGP session has gone down and then come back up.
<b>Peer ID</b>	Router identifier of the peer.
<b>Group index</b>	Index number for the BGP peer group. The index number differentiates between groups when a single BGP group is split because of different configuration options at the group and peer levels.
<b>Peer index</b>	Index that is unique within the BGP group to which the peer belongs.
<b>Local ID</b>	Router identifier of the local routing device.
<b>Local Interface</b>	Name of the interface on the local routing device.
<b>Active holdtime</b>	Hold time that the local routing device negotiated with the peer.
<b>Keepalive Interval</b>	Keepalive interval, in seconds.
<b>BFD</b>	Status of BFD failure detection.
<b>Local Address</b>	Name of directly connected interface over which direct EBGP peering is established.
<b>NLRI for restart configured on peer</b>	Names of address families configured for restart.
<b>NLRI advertised by peer</b>	Address families supported by the peer: <b>unicast</b> or <b>multicast</b> .
<b>NLRI for this session</b>	Address families being used for this session.
<b>Peer supports Refresh capability</b>	Remote peer's ability to send and request full route table readvertisement (route refresh capability). For more information, see RFC 2918, <i>Route Refresh Capability for BGP-4</i> .
<b>Restart time configured on peer</b>	Configured time allowed for restart on the neighbor.



Table 142: show bgp neighbor Output Fields (*continued*)

Field Name	Field Description
Stale routes from peer are kept for	When graceful restart is negotiated, the maximum time allowed to hold routes from neighbors after the BGP session has gone down.
Peer does not support Restarter functionality	Graceful restart restarter-mode is disabled on the peer.
Peer does not support Receiver functionality	Graceful restart helper-mode is disabled on the peer.
Restart time requested by this peer	Restart time requested by this neighbor during capability negotiation.
Restart flag received from the peer	When this field appears, the BGP speaker has restarted (Restarting), and this peer should not wait for the <b>end-of-rib</b> marker from the speaker before advertising routing information to the speaker.
NLRI that peer supports restart for	Neighbor supports graceful restart for this address family.
NLRI peer can save forwarding state	Neighbor supporting this address family saves all forwarding states.
NLRI that peer saved forwarding for	Neighbor saves all forwarding states for this address family.
NLRI that restart is negotiated for	Router supports graceful restart for this address family.
NLRI of received end-of-rib markers	Address families for which end-of-routing-table markers are received from the neighbor.
NLRI of all end-of-rib markers sent	Address families for which end-of-routing-table markers are sent to the neighbor.
Peer supports 4 byte AS extension (peer-as 1)	Peer understands 4-byte AS numbers in BGP messages. The peer is running Junos OS Release 9.1 or later.
NLRIs for which peer can receive multiple paths	Appears in the command output of the local router if the downstream peer is configured to receive multiple BGP routes to a single destination, instead of only receiving the active route.  Possible value is <b>inet-unicast</b> .
NLRIs for which peer can send multiple paths: inet-unicast	Appears in the command output of the local router if the upstream peer is configured to send multiple BGP routes to a single destination, instead of only sending the active route.  Possible value is <b>inet-unicast</b> .



Table 142: show bgp neighbor Output Fields (*continued*)

Field Name	Field Description
Table inet.number	<p>Information about the routing table:</p> <ul style="list-style-type: none"> <li>• <b>RIB State</b>—BGP is in the graceful restart process for this routing table: <b>restart is complete</b> or <b>restart in progress</b>.</li> <li>• <b>Bit</b>—Number that represents the entry in the routing table for this peer.</li> <li>• <b>Send state</b>—State of the BGP group: <b>in sync</b>, <b>not in sync</b>, or <b>not advertising</b>.</li> <li>• <b>Active prefixes</b>—Number of prefixes received from the peer that are active in the routing table.</li> <li>• <b>Received prefixes</b>—Total number of prefixes from the peer, both active and inactive, that are in the routing table.</li> <li>• <b>Accepted prefixes</b>—Total number of prefixes from the peer that have been accepted by a routing policy.</li> <li>• <b>Suppressed due to damping</b>—Number of routes currently inactive because of damping or other reasons. These routes do not appear in the forwarding table and are not exported by routing protocols.</li> </ul>
Last traffic (seconds)	Last time any traffic was received from the peer or sent to the peer, and the last time the local routing device checked.
Input messages	Messages that BGP has received from the receive socket buffer, showing the total number of messages, number of update messages, number of times a policy is changed and refreshed, and the buffer size in octets. The buffer size is 16 KB.
Output messages	Messages that BGP has written to the transmit socket buffer, showing the total number of messages, number of update messages, number of times a policy is changed and refreshed, and the buffer size in octets. The buffer size is 16 KB.
Input dropped path attributes	<p>Information about dropped path attributes:</p> <ul style="list-style-type: none"> <li>• <b>Code</b>—Path attribute code.</li> <li>• <b>Count</b>—Path attribute count.</li> </ul>
Input ignored path attributes	<p>Information about ignored path attributes:</p> <ul style="list-style-type: none"> <li>• <b>Code</b>—Path attribute code.</li> <li>• <b>Count</b>—Path attribute count.</li> </ul>
Output queue	Number of BGP packets that are queued to be transmitted to a particular neighbor for a particular routing table. Output queue 0 is for unicast NLRIs, and queue 1 is for multicast NLRIs.
Trace options	Configured tracing of BGP protocol packets and operations.
Trace file	Name of the file to receive the output of the tracing operation.
Filter Updates recv	<p>(orf option only) Number of outbound-route filters received for each configured address family.</p> <p><b>NOTE:</b> The counter is cumulative. For example, the counter is increased after the remote peer either resends or clears the outbound route filtering prefix list.</p>



Table 142: show bgp neighbor Output Fields (*continued*)

Field Name	Field Description
<b>Immediate</b>	( <b>orf</b> option only) Number of route updates received with the immediate flag set. The immediate flag indicates that the BGP peer should readvertise the updated routes.  <b>NOTE:</b> The counter is cumulative. For example, the counter is increased after the remote peer either resends or clears the outbound route filtering prefix list.
<b>Filter</b>	( <b>orf</b> option only) Type of prefix filter received: <b>prefix-based</b> or <b>extended-community</b> .
<b>Received filter entries</b>	( <b>orf</b> option only) List of received filters displayed.
<b>seq</b>	( <b>orf</b> option only) Numerical order assigned to this prefix entry among all the received outbound route filter prefix entries.
<b>prefix</b>	( <b>orf</b> option only) Address for the prefix entry that matches the filter.
<b>minlength</b>	( <b>orf</b> option only) Minimum prefix length, in bits, required to match this prefix.
<b>maxlength</b>	( <b>orf</b> option only) Maximum prefix length, in bits, required to match this prefix.
<b>match</b>	( <b>orf</b> option only) For this prefix match, whether to <b>permit</b> or <b>deny</b> route updates.



## Sample Output

### show bgp neighbor

```

user@host > show bgp neighbor
Peer: 10.255.7.250+179 AS 10   Local: 10.255.7.248+63740 AS 10
  Type: Internal   State: Established   Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ redist_static ]
  Options: <Preference LocalAddress PeerAS Refresh>
  Local Address: 10.255.7.248 Holdtime: 90 Preference: 170 Outbound Timer: 50
  Number of flaps: 0
  Peer ID: 10.255.7.250   Local ID: 10.255.7.248   Active Holdtime: 90
  Keepalive Interval: 30   Group index: 0   Peer index: 0
  BFD: disabled, down
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 10)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:          1
    Received prefixes:        1
    Accepted prefixes:        1
    Suppressed due to damping: 0
    Advertised prefixes:      1
  Last traffic (seconds): Received 9   Sent 5   Checked 5
  Input messages: Total 36   Updates 2   Refreshes 0   Octets 718
  Output messages: Total 37   Updates 1   Refreshes 0   Octets 796
  Output Queue[0]: 0

Peer: 10.255.162.214+52193 AS 100 Local: 10.255.167.205+179 AS 100
  Type: Internal   State: Established (route reflector client)Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference LocalAddress Cluster AddressFamily Rib-group Refresh>
  Address families configured: inet-unicast inet-vpn-unicast route-target
  Local Address: 10.255.167.205 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.255.162.214   Local ID: 10.255.167.205   Active Holdtime: 90
  Keepalive Interval: 30   Group index: 0   Peer index: 1

```

### show bgp neighbor (CLNS)

```

user@host> show bgp neighbor
Peer: 10.245.245.1+179 AS 200 Local: 10.245.245.3+3770 AS 100
  Type: External   State: Established   Flags: <ImportEval Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Options: <Multihop Preference LocalAddress HoldTime AddressFamily PeerAS
  Rib-group Refresh>
  Address families configured: iso-vpn-unicast
  Local Address: 10.245.245.3 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.245.245.1   Local ID: 10.245.245.3   Active Holdtime: 90

```



```

Keepalive Interval: 30          Peer index: 0
NLRI advertised by peer: iso-vpn-unicast
NLRI for this session: iso-vpn-unicast
Peer supports Refresh capability (2)
Table bgp.isovpn.0 Bit: 10000
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete
  Send state: in sync
  Active prefixes:              3
  Received prefixes:            3
  Suppressed due to damping:    0
  Advertised prefixes:          3
Table aaaa.iso.0
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete
  Send state: not advertising
  Active prefixes:              3
  Received prefixes:            3
  Suppressed due to damping:    0
Last traffic (seconds): Received 6    Sent 5    Checked 5
Input messages: Total 1736    Updates 4    Refreshes 0    Octets 33385
Output messages: Total 1738    Updates 3    Refreshes 0    Octets 33305
Output Queue[0]: 0
Output Queue[1]: 0

```

#### show bgp neighbor (Layer 2 VPN)

```

user@host> show bgp neighbor
Peer: 10.69.103.2      AS 65100 Local: 10.69.103.1      AS 65103
  Type: External      State: Active      Flags: <ImportEval>
  Last State: Idle     Last Event: Start
  Last Error: None
  Export: [ BGP-INET-import ]
  Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily PeerAS
Refresh>
  Address families configured: inet-unicast
  Local Address: 10.69.103.1 Holdtime: 90 Preference: 170
  Number of flaps: 0
Peer: 10.69.104.2      AS 65100 Local: 10.69.104.1      AS 65104
  Type: External      State: Active      Flags: <ImportEval>
  Last State: Idle     Last Event: Start
  Last Error: None
  Export: [ BGP-L-import ]
  Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily PeerAS
Refresh>
  Address families configured: inet-labeled-unicast
  Local Address: 10.69.104.1 Holdtime: 90 Preference: 170
  Number of flaps: 0
Peer: 10.255.14.182+179 AS 69    Local: 10.255.14.176+2131 AS 69
  Type: Internal      State: Established  Flags: <ImportEval>
  Last State: OpenConfirm Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily
Rib-group Refresh>
  Address families configured: inet-vpn-unicast l2vpn
  Local Address: 10.255.14.176 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.255.14.182    Local ID: 10.255.14.176    Active Holdtime: 90
  Keepalive Interval: 30
  NLRI for restart configured on peer: inet-vpn-unicast l2vpn
  NLRI advertised by peer: inet-vpn-unicast l2vpn
  NLRI for this session: inet-vpn-unicast l2vpn
  Peer supports Refresh capability (2)

```



```
Restart time configured on the peer: 120
Stale routes from peer are kept for: 300
Restart time requested by this peer: 120
NLRI that peer supports restart for: inet-vpn-unicast 12vpn
NLRI peer can save forwarding state: inet-vpn-unicast 12vpn
NLRI that peer saved forwarding for: inet-vpn-unicast 12vpn
NLRI that restart is negotiated for: inet-vpn-unicast 12vpn
NLRI of received end-of-rib markers: inet-vpn-unicast 12vpn
Table bgp.13vpn.0 Bit: 10000
  RIB State: BGP restart in progress
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          10
  Received prefixes:        10
  Suppressed due to damping: 0
Table bgp.12vpn.0 Bit: 20000
  RIB State: BGP restart in progress
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          1
  Received prefixes:        1
  Suppressed due to damping: 0
Table BGP-INET.inet.0 Bit: 30000
  RIB State: BGP restart in progress
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          2
  Received prefixes:        2
  Suppressed due to damping: 0
Table BGP-L.inet.0 Bit: 40000
  RIB State: BGP restart in progress
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          2
  Received prefixes:        2
  Suppressed due to damping: 0
Table LDP.inet.0 Bit: 50000
  RIB State: BGP restart is complete
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          1
  Received prefixes:        1
  Suppressed due to damping: 0
Table OSPF.inet.0 Bit: 60000
  RIB State: BGP restart is complete
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          2
  Received prefixes:        2
  Suppressed due to damping: 0
Table RIP.inet.0 Bit: 70000
  RIB State: BGP restart is complete
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          2
  Received prefixes:        2
  Suppressed due to damping: 0
Table STATIC.inet.0 Bit: 80000
  RIB State: BGP restart is complete
  RIB State: VPN restart in progress
  Send state: in sync
```



```

Active prefixes:          1
Received prefixes:       1
Suppressed due to damping: 0
Table L2VPN.12vpn.0 Bit: 90000
RIB State: BGP restart is complete
RIB State: VPN restart in progress
Send state: in sync
Active prefixes:          1
Received prefixes:       1
Suppressed due to damping: 0
Last traffic (seconds): Received 0    Sent 0    Checked 0
Input messages: Total 14    Updates 13    Refreshes 0    Octets 1053
Output messages: Total 3    Updates 0    Refreshes 0    Octets 105
Output Queue[0]: 0
Output Queue[1]: 0
Output Queue[2]: 0
Output Queue[3]: 0
Output Queue[4]: 0
Output Queue[5]: 0
Output Queue[6]: 0
Output Queue[7]: 0
Output Queue[8]: 0

```

#### show bgp neighbor (Layer 3 VPN)

```

user@host> show bgp neighbor
Peer: 4.4.4.4+179    AS 10045 Local: 5.5.5.5+1214    AS 10045
Type: Internal    State: Established    Flags: <ImportEval>
Last State: OpenConfirm    Last Event: RecvKeepAlive
Last Error: None
Export: [ match-all ] Import: [ match-all ]
Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily
Rib-group Refresh>
Address families configured: inet-vpn-unicast
Local Address: 5.5.5.5 Holdtime: 90 Preference: 170
Flags for NLRI inet-labeled-unicast: TrafficStatistics
Traffic Statistics: Options: all File: /var/log/bstat.log
                                size 131072 files 10

Traffic Statistics Interval: 60
Number of flaps: 0
Peer ID: 192.168.1.110    Local ID: 192.168.1.111    Active Holdtime: 90
Keepalive Interval: 30
NLRI for restart configured on peer: inet-vpn-unicast
NLRI advertised by peer: inet-vpn-unicast
NLRI for this session: inet-vpn-unicast
Peer supports Refresh capability (2)
Restart time configured on the peer: 120
Stale routes from peer are kept for: 300
Restart time requested by this peer: 120
NLRI that peer supports restart for: inet-vpn-unicast
NLRI peer can save forwarding state: inet-vpn-unicast
NLRI that peer saved forwarding for: inet-vpn-unicast
NLRI that restart is negotiated for: inet-vpn-unicast
NLRI of received end-of-rib markers: inet-vpn-unicast
NLRI of all end-of-rib markers sent: inet-vpn-unicast
Table bgp.13vpn.0 Bit: 10000
RIB State: BGP restart is complete
RIB State: VPN restart is complete
Send state: in sync
Active prefixes:          2
Received prefixes:       2
Suppressed due to damping: 0
Table vpn-green.inet.0 Bit: 20001

```



```

RIB State: BGP restart is complete
RIB State: VPN restart is complete
Send state: in sync
Active prefixes:          2
Received prefixes:        2
Suppressed due to damping: 0
Last traffic (seconds): Received 15   Sent 20   Checked 20
Input messages:  Total 40   Updates 2   Refreshes 0   Octets 856
Output messages: Total 44   Updates 2   Refreshes 0   Octets 1066
Output Queue[0]: 0
Output Queue[1]: 0
Trace options: detail packets
Trace file: /var/log/bgpr.log size 131072 files 10

```

### show bgp neighbor neighbor-address

```

user@host> show bgp neighbor 192.168.1.111
Peer: 10.255.245.12+179 AS 35 Local: 10.255.245.13+2884 AS 35
Type: Internal State: Established (route reflector client)Flags: <Sync>
Last State: OpenConfirm Last Event: RecvKeepAlive
Last Error: None
Options: <Preference LocalAddress HoldTime Cluster AddressFamily Rib-group
Refresh>
Address families configured: inet-vpn-unicast inet-labeled-unicast
Local Address: 10.255.245.13 Holdtime: 90 Preference: 170
Flags for NLRI inet-vpn-unicast: AggregateLabel
Flags for NLRI inet-labeled-unicast: AggregateLabel
Number of flaps: 0
Peer ID: 10.255.245.12 Local ID: 10.255.245.13 Active Holdtime: 90
Keepalive Interval: 30
BFD: disabled
NLRI advertised by peer: inet-vpn-unicast inet-labeled-unicast
NLRI for this session: inet-vpn-unicast inet-labeled-unicast
Peer supports Refresh capability (2)
Restart time configured on the peer: 300
Stale routes from peer are kept for: 60
Restart time requested by this peer: 300
NLRI that peer supports restart for: inet-unicast inet6-unicast
NLRI that restart is negotiated for: inet-unicast inet6-unicast
NLRI of received end-of-rib markers: inet-unicast inet6-unicast
NLRI of all end-of-rib markers sent: inet-unicast inet6-unicast
Table inet.0 Bit: 10000
RIB State: restart is complete
Send state: in sync
Active prefixes: 4
Received prefixes: 6
Suppressed due to damping: 0
Table inet6.0 Bit: 20000
RIB State: restart is complete
Send state: in sync
Active prefixes: 0
Received prefixes: 2
Suppressed due to damping: 0
Last traffic (seconds): Received 3 Sent 3 Checked 3
Input messages:  Total 9 Updates 6 Refreshes 0 Octets 403
Output messages: Total 7 Updates 3 Refreshes 0 Octets 365
Output Queue[0]: 0
Output Queue[1]: 0
Trace options: detail packets
Trace file: /var/log/bgpr size 131072 files 10

user@host> show bgp neighbor 192.168.4.222

```



## show bgp neighbor neighbor-address

```

Peer: 192.168.4.222+4902 AS 65501 Local: 192.168.4.221+179 AS 65500
Type: External      State: Established      Flags: <Sync>
Last State: OpenConfirm  Last Event: RecvKeepAlive
Last Error: Cease
Export: [ export-policy ] Import: [ import-policy ]
Options: <Preference HoldTime AddressFamily PeerAS PrefixLimit Refresh>
Address families configured: inet-unicast inet-multicast
Holdtime: 60000 Preference: 170
Number of flaps: 4
Last flap event: RecvUpdate
Error: 'Cease' Sent: 5 Recv: 0
Peer ID: 10.255.245.6      Local ID: 10.255.245.5      Active Holdtime: 60000
Keepalive Interval: 20000      Peer index: 0
BFD: disabled, down
Local Interface: fxp0.0
NLRI advertised by peer: inet-unicast inet-multicast
NLRI for this session: inet-unicast inet-multicast
Peer supports Refresh capability (2)
Table inet.0 Bit: 10000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:          8
  Received prefixes:        10
  Accepted prefixes:        10
  Suppressed due to damping: 0
  Advertised prefixes:      3
Table inet.2 Bit: 20000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:          0
  Received prefixes:        0
  Accepted prefixes:        0
  Suppressed due to damping: 0
  Advertised prefixes:      0
Last traffic (seconds): Received 357 Sent 357 Checked 357
Input messages: Total 4 Updates 2 Refreshes 0 Octets 211
Output messages: Total 4 Updates 1 Refreshes 0 Octets 147
Output Queue[0]: 0
Output Queue[1]: 0
Trace options: all
Trace file: /var/log/bgp size 10485760 files 10

```

## show bgp neighbor orf neighbor-address detail

```

user@host > show bgp neighbor orf 192.168.165.56 detail
Peer: 192.168.165.56+179 Type: External
Group: ext1

inet-unicast
  Filter updates rcv:          1 Immediate:          1
  Filter: prefix-based receive
  Received filter entries:
    seq 1: prefix 2.2.2.2/32: minlen 32: maxlen 32: match deny:

inet6-unicast
  Filter updates rcv:          0 Immediate:          1
  Filter: prefix-based receive
  Received filter entries:
    *.*

```



## show log

---

<b>Syntax</b>	<code>show log</code> <code>&lt;filename   user &lt;username&gt;&gt;</code>
<b>Syntax (QFabric System)</b>	<code>show log &lt;filename&gt;</code>
<b>Syntax (TX Matrix Routers)</b>	<code>show log</code> <code>&lt;all-lcc   lcc <i>number</i>   scc&gt;</code> <code>&lt;filename   user &lt;username&gt;&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	List log files, display log file contents, or display information about users who have logged in to the router or switch.
<b>Options</b>	<b>none</b> —List all log files.  <b>&lt;all-lcc   lcc <i>number</i>   scc&gt;</b> —(TX Matrix routers only) (Optional) Display logging information about all T640 routers (or line-card chassis) or a specific T640 router (replace <i>number</i> with a value from <b>0</b> through <b>3</b> ) connected to a TX Matrix router. Or, display logging information about the TX Matrix router (or switch-card chassis).  <b>filename</b> —(Optional) Display the log messages in the specified log file. For the routing matrix, the filename must include the chassis information.  <b>user &lt;username&gt;</b> —(Optional) Display logging information about users who have recently logged in to the router or switch. If you include <i>username</i> , display logging information about the specified user.
<b>Required Privilege Level</b>	trace
<b>List of Sample Output</b>	<a href="#">show log on page 1857</a> <a href="#">show log filename on page 1857</a> <a href="#">show log filename (QFabric System) on page 1857</a> <a href="#">show log user on page 1858</a>



## Sample Output

### show log

```
user@host> show log
total 57518
-rw-r--r-- 1 root bin 211663 Oct 1 19:44 dcd
-rw-r--r-- 1 root bin 999947 Oct 1 19:41 dcd.0
-rw-r--r-- 1 root bin 999994 Oct 1 17:48 dcd.1
-rw-r--r-- 1 root bin 238815 Oct 1 19:44 rpd
-rw-r--r-- 1 root bin 1049098 Oct 1 18:00 rpd.0
-rw-r--r-- 1 root bin 1061095 Oct 1 12:13 rpd.1
-rw-r--r-- 1 root bin 1052026 Oct 1 06:08 rpd.2
-rw-r--r-- 1 root bin 1056309 Sep 30 18:21 rpd.3
-rw-r--r-- 1 root bin 1056371 Sep 30 14:36 rpd.4
-rw-r--r-- 1 root bin 1056301 Sep 30 10:50 rpd.5
-rw-r--r-- 1 root bin 1056350 Sep 30 07:04 rpd.6
-rw-r--r-- 1 root bin 1048876 Sep 30 03:21 rpd.7
-rw-rw-r-- 1 root bin 19656 Oct 1 19:37 wtmp
```

### show log filename

```
user@host> show log rpd
Oct 1 18:00:18 trace_on: Tracing to ?/var/log/rpd? started
Oct 1 18:00:18 EVENT <MTU> ds-5/2/0.0 index 24 <Broadcast PointToPoint Multicast
Oct 1 18:00:18
Oct 1 18:00:19 KRT recv len 56 V9 seq 148 op add Type route/if af 2 addr
13.13.13.21 nhop type local nhop 13.13.13.21
Oct 1 18:00:19 KRT recv len 56 V9 seq 149 op add Type route/if af 2 addr
13.13.13.22 nhop type unicast nhop 13.13.13.22
Oct 1 18:00:19 KRT recv len 48 V9 seq 150 op add Type ifaddr index 24 devindex
43
Oct 1 18:00:19 KRT recv len 144 V9 seq 151 op chnge Type ifdev devindex 44
Oct 1 18:00:19 KRT recv len 144 V9 seq 152 op chnge Type ifdev devindex 45
Oct 1 18:00:19 KRT recv len 144 V9 seq 153 op chnge Type ifdev devindex 46
Oct 1 18:00:19 KRT recv len 1272 V9 seq 154 op chnge Type ifdev devindex 47
...
```

### show log filename (QFabric System)

```
user@qfabric> show log messages
Mar 28 18:00:06 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:06 ED1486
chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 1, jnxFruL3Index 0,
jnxFruName PIC: 48x 10G-SFP+ @ 0/0/*, jnxFruType 11, jnxFruSlot 0,
jnxFruOfflineReason 2, jnxFruLastPowerOff 0, jnxFruLastPowerOn 2159)
Mar 28 18:00:07 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:07 ED1486
chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 2, jnxFruL3Index 0,
jnxFruName PIC: @ 0/1/*, jnxFruType 11, jnxFruSlot 0, jnxFruOfflineReason 2,
jnxFruLastPowerOff 0, jnxFruLastPowerOn 2191)
Mar 28 18:00:07 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:07 ED1492
chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 1, jnxFruL3Index 0,
jnxFruName PIC: 48x 10G-SFP+ @ 0/0/*, jnxFruType 11, jnxFruSlot 0,
jnxFruOfflineReason 2, jnxFruLastPowerOff 0, jnxFruLastPowerOn 242726)
Mar 28 18:00:07 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:07 ED1492
chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 2, jnxFruL3Index 0,
jnxFruName PIC: @ 0/1/*, jnxFruType 11, jnxFruSlot 0, jnxFruOfflineReason 2,
jnxFruLastPowerOff 0, jnxFruLastPowerOn 242757)
Mar 28 18:00:16 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:16 ED1486
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:00:27 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:27 ED1486
```



```
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:00:50 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:50
_DCF_default__NW-INE-0_RE0_ file: UI_COMMIT: User 'root' requested 'commit'
operation (comment: none)
Mar 28 18:00:50 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:50
_DCF_default__NW-INE-0_RE0_ file: UI_COMMIT: User 'root' requested 'commit'
operation (comment: none)
Mar 28 18:00:55 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:55 ED1492
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:01:10 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:01:10 ED1492
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:02:37 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:02:37 ED1491
chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 1, jnxFruL3Index 0,
jnxFruName PIC: 48x 10G-SFP+ @ 0/0/*, jnxFruType 11, jnxFruSlot 0,
jnxFruOfflineReason 2, jnxFruLastPowerOff 0, jnxFruLastPowerOn 33809)
```

#### show log user

```
user@host> show log user
darius  mg2546                Thu Oct  1 19:37   still logged in
darius  mg2529                Thu Oct  1 19:08 - 19:36   (00:28)
darius  mg2518                Thu Oct  1 18:53 - 18:58   (00:04)
root    mg1575                Wed Sep 30 18:39 - 18:41   (00:02)
root    ttyp2      jun.site.per Wed Sep 30 18:39 - 18:41   (00:02)
alex    ttyp1      192.168.1.2   Wed Sep 30 01:03 - 01:22   (00:19)
```



## show (ospf | ospf3) overview

<b>Syntax</b>	show (ospf   ospf3) overview <brief   extensive> <instance <i>instance-name</i> > <logical-system (all   <i>logical-system-name</i> )> <realm (ipv4-multicast   ipv4-unicast   ipv6-multicast)>
<b>Syntax (EX Series Switch and QFX Series)</b>	show (ospf   ospf3) overview <brief   extensive> <instance <i>instance-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>realm</b> option introduced in Junos OS Release 9.2. Database protection introduced in Junos 10.2. Command introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Display Open Shortest Path First (OSPF) overview information.
<b>Options</b>	<p><b>none</b>—Display standard information about all OSPF neighbors for all routing instances.</p> <p><b>brief   extensive</b>—(Optional) Display the specified level of output.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display all OSPF interfaces under the named routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>realm (ipv4-multicast   ipv4-unicast   ipv6-multicast)</b>—(Optional) (OSPFv3 only) Display information about the specified OSPFv3 realm, or address family. Use the <b>realm</b> option to specify an address family for OSPFv3 other than IPv6 unicast, which is the default.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show ospf overview on page 1862</a> <a href="#">show ospf overview (With Database Protection) on page 1862</a> <a href="#">show ospf3 overview (With Database Protection) on page 1862</a> <a href="#">show ospf overview extensive on page 1863</a>
<b>Output Fields</b>	<a href="#">Table 143 on page 1859</a> lists the output fields for the <b>show ospf overview</b> command. Output fields are listed in the approximate order in which they appear.

Table 143: show ospf overview Output Fields

Field name	Field Description	Level of Output
Instance	OSPF routing instance.	All levels



Table 143: show ospf overview Output Fields (*continued*)

Field name	Field Description	Level of Output
<b>Router ID</b>	Router ID of the routing device.	All levels
<b>Route table index</b>	Route table index.	All levels
<b>Configured overload</b>	Overload capability is enabled. If the overload timer is also configured, display the time that remains before it is set to expire. This field is not displayed after the timer expires.	All levels
<b>Topology</b>	Topology identifier.	All levels
<b>Prefix export count</b>	Number of prefixes exported into OSPF.	All levels
<b>Full SPF runs</b>	Number of complete Shortest Path First calculations.	All levels
<b>SPF delay</b>	Delay before performing consecutive Shortest Path First calculations.	All levels
<b>SPF holddown</b>	Delay before performing additional Shortest Path First (SPF) calculations after the maximum number of consecutive SPF calculations is reached.	All levels
<b>SPF rapid runs</b>	Maximum number of Shortest Path First calculations that can be performed in succession before the hold-down timer begins.	All levels
<b>LSA refresh time</b>	Refresh period for link-state advertisement (in minutes).	All levels
<b>Database protection state</b>	Current state of database protection.	All levels
<b>Warning threshold</b>	Threshold at which a warning message is logged (percentage of maximum LSA count).	All levels
<b>Non self-generated LSAs</b>	Number of LSAs whose router ID is not equal to the local router ID: <b>Current</b> , <b>Warning</b> (threshold), and <b>Allowed</b> .	All levels
<b>Ignore time</b>	How long the database has been in the ignore state.	All levels
<b>Reset time</b>	How long the database must stay out of the ignore or isolated state before it returns to normal operations.	All levels
<b>Ignore count</b>	Number of times the database has been in the ignore state: <b>Current</b> and <b>Allowed</b> .	All levels
<b>Restart</b>	Graceful restart capability: <b>enabled</b> or <b>disabled</b> .	All levels
<b>Restart duration</b>	Time period for complete reacquisition of OSPF neighbors.	All levels
<b>Restart grace period</b>	Time period for which the neighbors should consider the restarting routing device as part of the topology.	All levels



Table 143: show ospf overview Output Fields (*continued*)

Field name	Field Description	Level of Output
Graceful restart helper mode	(OSPFv2) Standard graceful restart helper capability (based on RFC 3623): <b>enabled</b> or <b>disabled</b> .	All levels
Restart-signaling helper mode	(OSPFv2) Restart signaling-based graceful restart helper capability (based on RFC 4811, RFC 4812, and RFC 4813): <b>enabled</b> or <b>disabled</b> .	All levels
Helper mode	(OSPFv3) Graceful restart helper capability: <b>enabled</b> or <b>disabled</b> .	All levels
Trace options	OSPF-specific trace options.	<b>extensive</b>
Trace file	Name of the file to receive the output of the tracing operation.	<b>extensive</b>
Area	Area number. Area 0.0.0.0 is the backbone area.	All levels
Stub type	Stub type of area: <b>Normal Stub</b> , <b>Not Stub</b> , or <b>Not so Stubby Stub</b> .	All levels
Authentication Type	Type of authentication: <b>None</b> , <b>Password</b> , or <b>MD5</b> .  <b>NOTE:</b> The <b>Authentication Type</b> field refers to the authentication configured at the <b>[edit protocols ospf area area-id]</b> level. Any authentication configured for an interface in this area will not affect the value of this field.	All levels
Area border routers	Number of area border routers.	All levels
Neighbors	Number of autonomous system boundary routers.	All levels



## Sample Output

### show ospf overview

```
user@host> show ospf overview
Instance: master
  Router ID: 10.255.245.6
  Route table index: 0
  Configured overload, expires in 118 seconds
  LSA refresh time: 50 minutes
  Restart: Enabled
    Restart duration: 20 sec
    Restart grace period: 40 sec
    Helper mode: enabled
  Area: 0.0.0.0
    Stub type: Not Stub
    Authentication Type: None
    Area border routers: 0, AS boundary routers: 0
  Neighbors
    Up (in full state): 0
  Topology: default (ID 0)
  Prefix export count: 0
  Full SPF runs: 1
  SPF delay: 0.200000 sec, SPF holddown: 5 sec, SPF rapid runs: 3
```

### show ospf overview (With Database Protection)

```
user@host> show ospf overview
Instance: master
  Router ID: 10.255.112.218
  Route table index: 0
  LSA refresh time: 50 minutes
  Traffic engineering
  Restart: Enabled
    Restart duration: 180 sec
    Restart grace period: 210 sec
    Graceful restart helper mode: Enabled
    Restart-signaling helper mode: Enabled
  Database protection state: Normal
    Warning threshold: 70 percent
    Non self-generated LSAs: Current 582, Warning 700, Allowed 1000
    Ignore time: 30, Reset time: 60
    Ignore count: Current 0, Allowed 1
  Area: 0.0.0.0
    Stub type: Not Stub
    Authentication Type: None
    Area border routers: 0, AS boundary routers: 0
  Neighbors
    Up (in full state): 160
  Topology: default (ID 0)
  Prefix export count: 0
  Full SPF runs: 70
  SPF delay: 0.200000 sec, SPF holddown: 5 sec, SPF rapid runs: 3
  Backup SPF: Not Needed
```

### show ospf3 overview (With Database Protection)

```
user@host> show ospf3 overview
Instance: master
  Router ID: 10.255.112.128
  Route table index: 0
  LSA refresh time: 50 minutes
  Database protection state: Normal
```



```

Warning threshold: 80 percent
Non self-generated LSAs: Current 3, Warning 8, Allowed 10
Ignore time: 30, Reset time: 60
Ignore count: Current 0, Allowed 2
Area: 0.0.0.0
Stub type: Not Stub
Area border routers: 0, AS boundary routers: 0
Neighbors
  Up (in full state): 1
Topology: default (ID 0)
Prefix export count: 0
Full SPF runs: 7
SPF delay: 0.200000 sec, SPF holddown: 5 sec, SPF rapid runs: 3
Backup SPF: Not Needed

```

#### show ospf overview extensive

```

user@host> show ospf overview extensive
Instance: master
Router ID: 1.1.1.103
Route table index: 0
Full SPF runs: 13, SPF delay: 0.200000 sec
LSA refresh time: 50 minutes
Restart: Disabled
Trace options: lsa
Trace file: /var/log/ospf size 131072 files 10
Area: 0.0.0.0
Stub type: Not Stub
Authentication Type: None
Area border routers: 0, AS boundary routers: 0
Neighbors
  Up (in full state): 1

```

## Operational Mode Commands for Nonstop Software Upgrade

- [Performing a Nonstop Software Upgrade on the QFabric System on page 1863](#)
- [Verifying Nonstop Software Upgrade for QFabric Systems on page 1868](#)

### Performing a Nonstop Software Upgrade on the QFabric System

Nonstop software upgrade enables you to upgrade a QFabric system with minimal packet loss and maximum uptime. This feature introduces several high availability improvements to the QFabric system software upgrade process, including:

- Upgrading members of a Director group or Node group one at a time so that one device in the group is always operational
- Switching mastership of Routing Engine processes to the backup Director device before upgrading the master Director device
- Rebooting Interconnect devices and fabric control Routing Engines one at a time, so that one Interconnect device or one fabric control Routing Engine is always operational
- Switching mastership of a Node group to the backup Node device before upgrading the master Node device



- Specifying an upgrade group if you want all Node devices in a Node group to be upgraded in parallel (which shortens the time of the upgrade)
- Rebooting devices automatically as part of the nonstop upgrade process

When performing a nonstop upgrade, start with the Director group upgrade, then issue the fabric upgrade, and end with the Node group upgrades.



**NOTE:** Because there is no redundancy for Node groups containing a single Node device, traffic loss occurs when the device reboots during the upgrade. For node-groups defined with two node-devices, both must be online in order for upgrade to succeed.



**NOTE:** Before you install the software, we recommend that you back up your current configuration files by issuing the `request system software configuration-backup` command.



**NOTE:** Before you can perform a nonstop software upgrade in your QFabric system, you must first upgrade your system to Junos OS Release 12.2 by using a conventional upgrade method such as issuing the `request system software add component all` command.

This topic describes the following tasks:

- [Backing Up the Current Configuration Files on page 1864](#)
- [Downloading Software Files Using a Browser on page 1865](#)
- [Retrieving Software Files for Download on page 1866](#)
- [Performing a Nonstop Software Upgrade for Director Devices in a Director Group on page 1866](#)
- [Performing a Nonstop Software Upgrade for Interconnect Devices and Other Fabric-Related Components on page 1866](#)
- [\(Optional\) Creating Upgrade Groups for Node Groups on page 1867](#)
- [Performing a Nonstop Software Upgrade on a Node Group on page 1867](#)

---

### Backing Up the Current Configuration Files

To back up your current configuration files:

```
user@qfabric> request system software configuration-backup path
```

Back up the configuration files to a local directory, remote server, or removable drive (for example, an external USB flash drive).

For example:

```
user@qfabric> request system software configuration-backup/media/USB/
```



---

## Downloading Software Files Using a Browser

---



**NOTE:** To access the download site, you must have a service contract with Juniper Networks and an access account. If you need help obtaining an account, complete the registration form at the Juniper Networks website <https://www.juniper.net/registration/Register.jsp>.

---

To download the software package:

1. In a browser, go to <http://www.juniper.net/support/downloads/junos.html>.  
The Junos Platforms Download Software page appears.
2. In the QFX Series section, select the Qfabric system for which you want to download software.  
The Software Download page for the selected QFabric system appears.
3. Select the number of the software version that you want to download in the Release: pull-down window to the right of the tabs on the Download Software page.
4. Select the **Software** tab and then select the install package you want to download in the Install Package section.  
A login screen appears.
5. Select the **Software** tab and then select the complete install package you want to download in the QFabric System Install Package and Media section.  
A login screen appears.
6. Enter your user ID and password and press **Enter**.
7. Read the End User License Agreement, select the **I agree** option button, and then click **Proceed**.
8. Save the **jinstall-qfabric-version.rpm** file on your computer.



### Retrieving Software Files for Download

---

Retrieve the software from the location in which you downloaded it. To do this, issue the **request system software download** command. The software package is copied from where you downloaded it and is placed locally on the QFabric system.

- To retrieve the software:

```
user@qfabric> request system software download /path/package-name
```

For example:

```
user@qfabric> request system software download  
ftp://server/files/jinstall-qfabric-12.2X50-D10.3.rpm
```

### Performing a Nonstop Software Upgrade for Director Devices in a Director Group

---



**NOTE:** If you reboot any Node groups or Interconnect devices after you perform a nonstop upgrade on the Director group, these devices are upgraded to the same version of software that is running on the Director group.

---

To upgrade the software on the Director devices in a Director group:

- Issue the **request system software nonstop-upgrade director-group package-name** command.

For example:

```
user@qfabric> request system software nonstop-upgrade director-group  
jinstall-qfabric-12.2X50-D10.3.rpm
```

### Performing a Nonstop Software Upgrade for Interconnect Devices and Other Fabric-Related Components

---

Before you perform a nonstop upgrade on the Interconnect devices and other fabric-related components, verify that both Director devices in the Director group are online. Both Director devices must be online before you attempt to perform a nonstop upgrade. To verify that both Director devices are online, issue the **show fabric administration inventory director-group status** command.

To install the software on the Interconnect device and other components in the fabric:

- Issue the **request system software nonstop-upgrade fabric package-name** command.

For example:

```
user@qfabric> request system software nonstop-upgrade fabric  
jinstall-qfabric-12.2X50-D10.3.rpm
```



### (Optional) Creating Upgrade Groups for Node Groups

Upgrade groups enable two or more Node devices in a Node group, or an entire Node group, to be rebooted at the same time. If you do not create an upgrade group, the Node devices are upgraded one at a time. Before performing a nonstop upgrade on a Node group, create an upgrade group and include the devices you want to reboot at the same time.



**NOTE:** If you add Node devices that have links to the same link aggregation group (LAG), there might be traffic loss.

- Create the upgrade group by issuing the **set chassis node-group node-group-name nssu upgrade-group upgrade-group-name node-devices** command at the [edit chassis] hierarchy.

For example:

```
user@qfabric# set chassis node-group nodegroup1 nssu upgrade-group upgrade1 node-devices
[ node1 node2 ]
```

### Performing a Nonstop Software Upgrade on a Node Group

When you perform a nonstop software upgrade on a network Node group, the Node devices in the network Node group are upgraded in a serial fashion except when upgrade groups are configured. If you perform a nonstop upgrade on a redundant server Node group, both Node devices must be online for a successful upgrade. If one of the Node devices is no longer available, remove it from the configuration before you perform the nonstop software upgrade. If you perform a nonstop upgrade on a Node group with only one Node device, traffic loss occurs while the Node device is rebooting.



**NOTE:** You can upgrade multiple Node groups with this command. However, if more than one Node group is specified, there may be traffic loss depending on the topology of the network.

To install software on a Node group:

- Issue the **request system software nonstop-upgrade node-group node-group-name package-name** command.

To perform a nonstop upgrade on one Node group:

```
user@qfabric> request system software nonstop-upgrade node-group nodegroup1
jinstall-qfabric-12.2X50-D10.3.rpm
```

To perform a nonstop upgrade on more than one Node group:

```
user@qfabric> request system software nonstop-upgrade node-group [nodegroup1
nodegroup2 nodegroup3] jinstall-qfabric-12.2X50-D10.3.rpm
```

#### Related Documentation

- [Configuring Graceful Restart for QFabric Systems on page 1777](#)
- [Understanding Nonstop Software Upgrade for QFabric Systems on page 1770](#)



- [Verifying Nonstop Software Upgrade for QFabric Systems on page 1868](#)
- [request system software nonstop-upgrade on page 363](#)

## Verifying Nonstop Software Upgrade for QFabric Systems

This topic discusses how you can monitor the progress of each of the three steps in a nonstop software upgrade. By identifying the key actions and events that define this process, you can track the status of the upgrade with confidence.



**TIP:** When performing a nonstop software upgrade, open two SSH sessions to the QFabric CLI. Use one session to monitor the upgrade itself and use a second session to verify that the QFabric system components respond to operational mode commands as expected.

- [Verifying a Director Group Nonstop Software Upgrade on page 1868](#)
- [Verifying a Fabric Nonstop Software Upgrade on page 1881](#)
- [Verifying a Redundant Server Node Group Nonstop Software Upgrade on page 1882](#)
- [Verifying a Network Node Group Nonstop Software Upgrade on page 1885](#)

### Verifying a Director Group Nonstop Software Upgrade

**Purpose** During the Director group portion of a nonstop software upgrade, you should expect to see the Director device that hosts the CLI session selected as the master device. When mastership of all processes moves to the master, the QFabric system upgrades the backup Director device and this Director device reboots. After the backup Director device comes back online, the master Director device suspends CLI operations for 15 minutes, upgrades itself, and reboots. At this point, the backup becomes the new master Director device and you can issue CLI operational commands. Finally, the former master comes back online as a backup and both devices are operational once again.

**Action** 1. In one SSH session to the QFabric CLI, verify the current status of the QFabric system by issuing the **show fabric administration inventory**, **show fabric administration inventory director-group status**, and **show fabric session-host** commands. In this case, Director device DG0 is the master device but DG1 hosts the CLI session.

```
session1@qfabric> show fabric administration inventory
```

Item	Identifier	Connection	Configuration
Node group			
NW-NG-0		Connected	Configured
	P1507-C	Connected	
RSNG		Connected	Configured
	P1550-C	Connected	
	P1571-C	Connected	
Interconnect device			
IC-F4912		Connected	Configured



F4912/RE0	Connected	
Fabric manager		
FM-0	Connected	Configured
Fabric control		
FC-0	Connected	Configured
FC-1	Connected	Configured
Diagnostic routing engine		
DRE-0	Connected	Configured

```
session1@qfabric> show fabric administration inventory director-group status
```

```
Director Group Status Tue Jun 5 15:11:26 UTC 2012
```

Member	Status	Role	Mgmt Address	CPU	Free Memory	VMs	Up Time
dg0	online	master	10.49.215.38	8%	17363152k	4	3 days, 20:55 hrs
dg1	online	backup	10.49.215.39	6%	20157440k	3	3 days, 20:55 hrs

Member	Device Id/Alias	Status	Role
dg0	0281052011000001	online	master

#### Master Services

Database Server	online
Load Balancer Director	online
QFabric Partition Address	online

#### Director Group Managed Services

Shared File System	online
Network File System	online
Virtual Machine Server	online
Load Balancer/DHCP	online

#### Hard Drive Status

Volume ID:4	optimal
Physical ID:1	online
Physical ID:0	online
SCSI ID:1	100%
SCSI ID:0	100%

#### Size Used Avail Used% Mounted on

423G	5.4G	395G	2%	/
99M	16M	79M	17%	/boot
93G	7.3G	86G	8%	/pbdata

#### Director Group Processes

Director Group Manager	online
Partition Manager	online
Software Mirroring	online



Shared File System master	online	
Secure Shell Process	online	
Network File System	online	
DHCP Server master	online	master

FTP Server	online
Syslog	online
Distributed Management	online
SNMP Trap Forwarder	online
SNMP Process	online
Platform Management	online

## Interface Link Status

Management Interface	up
Control Plane Bridge	up
Control Plane LAG	up
CP Link [0/2]	up
CP Link [0/1]	up
CP Link [0/0]	up
CP Link [1/2]	down
CP Link [1/1]	down
CP Link [1/0]	down
Crossover LAG	up
CP Link [0/3]	up
CP Link [1/3]	up

Member	Device Id/Alias	Status	Role
dg1	0281052011000032	online	backup

## Director Group Managed Services

Shared File System	online
Network File System	online
Virtual Machine Server	online
Load Balancer/DHCP	online

## Hard Drive Status

Volume ID:8	optimal
Physical ID:1	online
Physical ID:0	online
SCSI ID:1	100%
SCSI ID:0	100%

Size	Used	Avail	Used%	Mounted on
423G	5.5G	395G	2%	/
99M	16M	79M	17%	/boot
93G	7.3G	86G	8%	/pbdata

## Director Group Processes

Director Group Manager	online
Partition Manager	online
Software Mirroring	online
Shared File System master	online
Secure Shell Process	online
Network File System	online



```

DHCP Server master      online    backup
FTP Server              online
Syslog                  online
Distributed Management  online
SNMP Trap Forwarder     online
SNMP Process            online
Platform Management     online

```

#### Interface Link Status

```

-----
Management Interface    up
Control Plane Bridge     up
Control Plane LAG        up
CP Link [0/2]            up
CP Link [0/1]            up
CP Link [0/0]            up
CP Link [1/2]            down
CP Link [1/1]            down
CP Link [1/0]            down
Crossover LAG           up
CP Link [0/3]            up
CP Link [1/3]            up

```

```
session1@qfabric> show fabric session-host
```

```
Identifier: 0281052011000032
```

- In a second SSH session to the QFabric CLI, issue the request for the Director group nonstop software upgrade.

```

root@qfabric> request system software nonstop-upgrade director-group
jinstall-qfabric-12.2X50-D10.3.rpm

```

- If the CLI session is being hosted by the master Director device, skip to step 4. However, if the CLI session is hosted by the backup Director device, the Director group mastership switches to the backup device after you issue the nonstop software upgrade command. In this example, mastership switches to Director device DG1.

```
session1@qfabric> show fabric administration inventory director-group status
```

```
Director Group Status Tue Jun 5 15:12:20 UTC 2012
```

Member	Status	Role	Mgmt Address	CPU	Free Memory	VMs	Up Time
dg0	online	backup	10.49.215.38	8%	31905924k	0	3 days, 21:16 hrs
dg1	online	master	10.49.215.39	6%	18010368k	3	3 days, 21:16 hrs

Member	Device Id/Alias	Status	Role
dg0	0281052011000001	online	backup

#### Director Group Managed Services

```

-----
Shared File System      offline
Network File System     offline
Virtual Machine Server  offline
Load Balancer/DHCP      offline

```

#### Hard Drive Status

```

-----
Volume ID:4             optimal

```



Physical ID:1	online
Physical ID:0	online
SCSI ID:1	100%
SCSI ID:0	100%

Size	Used	Avail	Used%	Mounted on
423G	5.4G	395G	2%	/
99M	16M	79M	17%	/boot

## Director Group Processes

Director Group Manager	online	
Partition Manager	online	
Software Mirroring	online	
Shared File System master	online	
Secure Shell Process	online	
Network File System	offline	
DHCP Server master	offline	backup
FTP Server	online	
Syslog	online	
Distributed Management	offline	
SNMP Trap Forwarder	offline	
SNMP Process	offline	
Platform Management	online	

## Interface Link Status

Management Interface	up
Control Plane Bridge	up
Control Plane LAG	up
CP Link [0/2]	up
CP Link [0/1]	up
CP Link [0/0]	up
CP Link [1/2]	down
CP Link [1/1]	down
CP Link [1/0]	down
Crossover LAG	up
CP Link [0/3]	up
CP Link [1/3]	up

Member	Device Id/Alias	Status	Role
dg1	0281052011000032	online	master

## Master Services

Database Server	online
Load Balancer Director	online
QFabric Partition Address	online

## Director Group Managed Services

Shared File System	online
Network File System	online
Virtual Machine Server	online
Load Balancer/DHCP	online

## Hard Drive Status



```

-----
Volume ID:8                optimal
Physical ID:1              online
Physical ID:0              online
SCSI ID:1                  100%
SCSI ID:0                  100%

Size  Used Avail Used% Mounted on
----  -
423G  6.0G 395G  2%   /
99M   16M  79M  17%  /boot
93G   7.3G 86G   8%   /pbdata

Director Group Processes
-----
Director Group Manager      online
Partition Manager           online
Software Mirroring           online
Shared File System master   online
Secure Shell Process         online
Network File System          online
DHCP Server master           online      master

FTP Server                   online
Syslog                       online
Distributed Management       online
SNMP Trap Forwarder          online
SNMP Process                 online
Platform Management          online

Interface Link Status
-----
Management Interface        up
Control Plane Bridge        up
Control Plane LAG           up
CP Link [0/2]                up
CP Link [0/1]                up
CP Link [0/0]                up
CP Link [1/2]                down
CP Link [1/1]                down
CP Link [1/0]                down
Crossover LAG               up
CP Link [0/3]                up
CP Link [1/3]                up

```

```

session1@qfabric> show fabric session-host
Identifier: 0281052011000032

```

4. The Director group nonstop software upgrade process continues by downloading and installing software for the fabric manager Routing Engines and the Director devices.

```

root@qfabric>
Validating update package jinstall-qfabric-12.2X50-D10.3.rpm
Installing update package jinstall-qfabric-12.2X50-D10.3.rpm
Installing fabric images version 12.2X50-D10.3
Performing cleanup
Package install complete
Installing update package jinstall-qfabric-12.2X50-D10.3.rpm on peer
Triggering Initial Stage of Fabric Manager Upgrade
Updating CCIF default image to 12.2X50-D10.3
Updating FM-0 to Junos version 12.2X50-D10.3

```



```
[Status 2012-06-05 15:25:29]: Fabric Manager: Upgrade Initial Stage started
[FM-0 2012-06-05 15:25:38]: FM-0 Master already running on LOCAL DG
[NW-NG-0 2012-06-05 15:25:45]: NW-NG-0 Master already running on LOCAL DG
[FM-0 2012-06-05 15:26:12]: Retrieving package
[FM-0 2012-06-05 15:27:11]: Pushing bundle to re0
[Status 2012-06-05 15:29:06]: Load completed with 0 errors...
[Status 2012-06-05 15:29:06]: Reboot is required to complete upgrade ...
[Status 2012-06-05 15:29:07]: Trying to Connect to Node: FM-0
[Status 2012-06-05 15:29:13]: Rebooting FM-0
[FM-0 2012-06-05 15:29:13]: Waiting for FM-0 to terminate ...
Starting Peer upgrade
```

Initiating rolling upgrade of Director peer: version 12.2X50-D10.3

```
Inform CCIF regarding rolling upgrade
[Peer Update Status]: Validating install package
jinstall-qfabric-12.2X50-D10.3.rpm
[Peer Update Status]: Cleaning up node for rolling phase one upgrade
[Peer Update Status]: Director group upgrade complete
[Peer Update Status]: COMPLETED
[Peer Update Status]: Waiting for peer to reboot and start phase one of rolling
upgrade
[Peer Update Status]: Waiting for peer to reboot and start phase one of rolling
upgrade
[Peer Update Status]: Waiting for peer to reboot and start phase one of rolling
upgrade
[Peer Update Status]: Waiting for peer to reboot and start phase one of rolling
upgrade
[Peer Update Status]: Waiting for peer to reboot and start phase one of rolling
upgrade
[Peer Update Status]: Waiting for peer to reboot and start phase one of rolling
upgrade
[Peer Update Status]: Waiting for peer to reboot and start phase one of rolling
upgrade
[Peer Update Status]: Waiting for peer to reboot and start phase one of rolling
upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase
one of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase
one of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase
one of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase
one of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase
one of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase
one of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase
one of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase
one of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase
one of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase
one of rolling upgrade
[Peer Update Status]: Waiting for peer to complete phase one of rolling upgrade
[Peer Update Status]: Peer completed phase one of rolling upgrade
```



5. When the system upgrades and reboots the backup Director device DG0, notice how this device is not displayed in the output of the **show fabric administration inventory director-group status** command. Because Director device DG1 appears, this means that the DG1 is operational and acts as the master device.



**NOTE:** If your second SSH session is being hosted by the rebooting Director device, your session terminates and you need to log back in to establish a new session running on the active Director device.

```
session1@qfabric> show fabric administration inventory director-group status
```

```
Director Group Status Tue Jun 5 15:41:14 UTC 2012
```

Member	Status	Role	Mgmt Address	CPU	Free Memory	VMs	Up Time
dg1	online	master	10.49.215.39	6%	8372272k	4	3 days, 21:25 hrs

Member	Device Id/Alias	Status	Role
dg1	0281052011000032	online	master

#### Master Services

Database Server	online
Load Balancer Director	online
QFabric Partition Address	online

#### Director Group Managed Services

Shared File System	online
Network File System	online
Virtual Machine Server	online
Load Balancer/DHCP	online

#### Hard Drive Status

Volume ID:8	optimal
Physical ID:1	online
Physical ID:0	online
SCSI ID:1	100%
SCSI ID:0	100%

Size	Used	Avail	Used%	Mounted on
423G	6.0G	395G	2%	/
99M	16M	79M	17%	/boot
93G	7.3G	86G	8%	/pbdata

#### Director Group Processes

Director Group Manager	online
Partition Manager	online
Software Mirroring	online
Shared File System master	online
Secure Shell Process	online
Network File System	online



```

DHCP Server master          online    master

FTP Server                  online
Syslog                     online
Distributed Management      online
SNMP Trap Forwarder        online
SNMP Process                online
Platform Management        online

Interface Link Status
-----
Management Interface       up
Control Plane Bridge       up
Control Plane LAG          up
CP Link [0/2]              up
CP Link [0/1]              up
CP Link [0/0]              up
CP Link [1/2]              down
CP Link [1/1]              down
CP Link [1/0]              down
Crossover LAG              up
CP Link [0/3]              up
CP Link [1/3]              up

```

6. The upgrade continues with master Director device DG1 suspending CLI services for 15 minutes, transferring mastership to Director device DG0, and then rebooting Director device DG1 (which terminates the CLI session).

```
root@qfabric>
```

```
[Peer Update Status]: Setting peer DG node as the master SFC
```

```
Delaying start of local upgrade to allow peer services time to initialize [15
minutes]
```

```
Delaying start of local upgrade to allow peer services time to initialize [15
minutes]
```

```
Delaying start of local upgrade to allow peer services time to initialize [12
minutes]
```

```
Delaying start of local upgrade to allow peer services time to initialize [9
minutes]
```

```
Delaying start of local upgrade to allow peer services time to initialize [6
minutes]
```

```
Delaying start of local upgrade to allow peer services time to initialize [3
minutes]
```

```
[Peer Update Status]: Check for VMs on dg0
```

```
Triggering Final Stage of Fabric Manager Upgrade:
```

```
Updating FM-0 to Junos version 12.2X50-D10.3
```

```
[Status 2012-06-05 16:10:12]: Fabric Manager: Upgrade Final Stage started
```

```
[NW-NG-0 2012-06-05 16:10:22]: Transferring NW-NG-0 Mastership to REMOTE DG
```

```
[NW-NG-0 2012-06-05 16:11:44]: Finished NW-NG-0 Mastership switch
```

```
[Status 2012-06-05 16:11:45]: Upgrading FM-0 VM on worker DG to 12.2X50-D10.3
```

```
[DRE-0 2012-06-05 16:12:43]: Retrieving package
```

```
[DRE-0 2012-06-05 16:13:46]: ----- re0: -----
```

```
[Status 2012-06-05 16:15:17]: Load completed with 0 errors...
```

```
[Status 2012-06-05 16:15:17]: Reboot is required to complete upgrade ...
```

```
[DRE-0 2012-06-05 16:15:22]: Waiting for DRE-0 to terminate ...
```

```
[DRE-0 2012-06-05 16:15:34]: Waiting for DRE-0 to come back ...
```

```
[DRE-0 2012-06-05 16:18:44]: Running Uptime Test for DRE-0
```

```
[DRE-0 2012-06-05 16:18:51]: Uptime Test for DRE-0 Passed ...
```

```
[Status 2012-06-05 16:18:51]: DRE-0 booted successfully ...
```

```
Performing post install shutdown and cleanup
```



Broadcast message from root (Tue Jun 5 16:18:51 2012):

The system is going down for reboot NOW!  
Director group upgrade complete

root@qfabric> Read from remote host qfabric-partition0: Connection reset by peer  
Connection to qfabric-partition0 closed.

7. Upon reopening the SSH session, notice that Director device DG0 is now the master device hosting the session and Director device DG1 does not appear in the QFabric system inventory while it is rebooting.

session1@qfabric> show fabric session-host  
Identifier: 0281052011000001

session1@qfabric> show fabric administration inventory director-group status  
Director Group Status Tue Jun 5 16:21:23 UTC 2012

Member	Status	Role	Mgmt Address	CPU	Free Memory	VMs	Up Time
dg0	online	master	10.49.215.38	13%	20739560k	3	36:29 mins

Member	Device Id/Alias	Status	Role
dg0	0281052011000001	online	master

#### Master Services

Database Server	online
Load Balancer Director	online
QFabric Partition Address	online

#### Director Group Managed Services

Shared File System	online
Network File System	online
Virtual Machine Server	online
Load Balancer/DHCP	online

#### Hard Drive Status

Volume ID:4	optimal
Physical ID:1	online
Physical ID:0	online
SCSI ID:1	100%
SCSI ID:0	100%

Size	Used	Avail	Used%	Mounted on
423G	5.3G	396G	2%	/
99M	16M	79M	17%	/boot
93G	7.4G	86G	8%	/pbdata

#### Director Group Processes

Director Group Manager	online
Partition Manager	online
Software Mirroring	online
Shared File System master	online



```

Secure Shell Process      online
Network File System      online
DHCP Server master       online      master

FTP Server                online
Syslog                   online
Distributed Management    online
SNMP Trap Forwarder      online
SNMP Process              online
Platform Management      online

Interface Link Status
-----
Management Interface     up
Control Plane Bridge     up
Control Plane LAG        up
CP Link [0/2]             up
CP Link [0/1]             up
CP Link [0/0]             up
CP Link [1/2]             down
CP Link [1/1]             down
CP Link [1/0]             down
Crossover LAG            up
CP Link [0/3]             up
CP Link [1/3]             up

```

8. When Director device DG1 comes back online, it returns to the QFabric system inventory as a backup Director device and hosts some of the Routing Engine processes (which should appear load balanced between the master and backup Director devices).

```

session1@qfabric> show fabric administration inventory director-group status
root@qfabric> show fabric administration inventory director-group status
Director Group Status Tue Jun  5 16:41:02 UTC 2012

```

Member	Status	Role	Mgmt Address	CPU	Free Memory	VMs	Up Time
dg0	online	master	10.49.215.38	15%	14759920k	6	56:09 mins
dg1	online	backup	10.49.215.39	8%	31486680k	0	07:51 mins

Member	Device Id/Alias	Status	Role
dg0	0281052011000001	online	master

#### Master Services

```

-----
Database Server          online
Load Balancer Director   online
QFabric Partition Address online

```

#### Director Group Managed Services

```

-----
Shared File System       online
Network File System       online
Virtual Machine Server    online
Load Balancer/DHCP        online

```

#### Hard Drive Status

```
-----
```



```

Volume ID:4                optimal
Physical ID:1              online
Physical ID:0              online
SCSI ID:1                  100%
SCSI ID:0                  100%

```

```

Size  Used Avail Used% Mounted on
-----
423G  5.3G 396G   2%  /
99M   16M  79M  17% /boot
93G   7.4G 86G   8%  /pbdata

```

#### Director Group Processes

```

-----
Director Group Manager      online
Partition Manager           online
Software Mirroring          online
Shared File System master   online
Secure Shell Process        online
Network File System          online
DHCP Server master          online      master

FTP Server                   online
Syslog                       online
Distributed Management       online
SNMP Trap Forwarder          online
SNMP Process                 online
Platform Management          online

```

#### Interface Link Status

```

-----
Management Interface        up
Control Plane Bridge        up
Control Plane LAG           up
CP Link [0/2]               up
CP Link [0/1]               up
CP Link [0/0]               up
CP Link [1/2]               down
CP Link [1/1]               down
CP Link [1/0]               down
Crossover LAG               up
CP Link [0/3]               up
CP Link [1/3]               up

```

```

Member Device Id/Alias  Status  Role
-----
dg1      0281052011000032 online  backup

```

#### Director Group Managed Services

```

-----
Shared File System         online
Network File System         online
Virtual Machine Server      online
Load Balancer/DHCP          online

```

#### Hard Drive Status

```

-----
Volume ID:8                optimal
Physical ID:1              online
Physical ID:0              online

```



```

SCSI ID:1          100%
SCSI ID:0          100%

```

```

Size  Used Avail Used% Mounted on
-----
423G  5.3G 396G   2%  /
99M   16M  79M   17% /boot
93G   7.4G 86G    8% /pbdata

```

#### Director Group Processes

```

-----
Director Group Manager      online
Partition Manager           online
Software Mirroring          online
Shared File System master   online
Secure Shell Process        online
Network File System         online
DHCP Server master          online      backup

FTP Server                   online
Syslog                       online
Distributed Management      online
SNMP Trap Forwarder         online
SNMP Process                 online
Platform Management         online

```

#### Interface Link Status

```

-----
Management Interface        up
Control Plane Bridge        up
Control Plane LAG           up
CP Link [0/2]               up
CP Link [0/1]               up
CP Link [0/0]               up
CP Link [1/2]               down
CP Link [1/1]               down
CP Link [1/0]               down
Crossover LAG               up
CP Link [0/3]               up
CP Link [1/3]               up

```

session1@qfabric> show fabric administration inventory infrastructure

dg0:

Routing Engine Type	Hostname	PID	
CPU-Use(%)			
Fabric control	QFabric_default_FC-1_RE0	27906	2.5
Network Node group	QFabric_default_NW-NG-1_RE1	20421	1.8
Fabric manager	FM-0	4211	1.8
Debug Routing Engine	QFabric_DRE	1575	3.3

dg1:

Routing Engine Type	Hostname	PID	
CPU-Use(%)			
Fabric control	QFabric_default_FC-0_RE0	5686	2.3



Network Node group	QFabric_default_NW-NG-0_RE0	5866	1.9
Fabric manager	FM-1	572	1.6

### Verifying a Fabric Nonstop Software Upgrade

**Purpose** During the fabric portion of a nonstop software upgrade, you should expect to see both fabric control Routing Engines upgrade first, followed by the upgrade of each Interconnect device one at a time.

**Action** 1. In an SSH session to the QFabric CLI, issue the request for the fabric nonstop software upgrade.

```

root@qfabric> request system software nonstop-upgrade fabric
jinstall-qfabric-12.2X50-D10.3.rpm
[FC-0      2012-06-05 16:48:53]: Retrieving package
[FC-1      2012-06-05 16:48:53]: Retrieving package
[IC-F4912 2012-06-05 16:48:59]: Retrieving package
[FC-0      2012-06-05 16:49:51]: ----- re0: -----
[FC-1      2012-06-05 16:49:52]: ----- re0: -----
[IC-F4912 2012-06-05 16:49:54]: ----- re0: -----
[IC-F4912 2012-06-05 16:50:42]: Step 1 of 20 Creating temporary file system
[IC-F4912 2012-06-05 16:50:42]: Step 2 of 20 Determining installation source
[IC-F4912 2012-06-05 16:50:43]: Step 3 of 20 Processing format options
[IC-F4912 2012-06-05 16:50:43]: Step 4 of 20 Determining installation slice
[IC-F4912 2012-06-05 16:50:43]: Step 5 of 20 Creating and labeling new slices
[IC-F4912 2012-06-05 16:50:44]: Step 6 of 20 Create and mount new file system
[IC-F4912 2012-06-05 16:50:53]: Step 7 of 20 Getting OS bundles
[IC-F4912 2012-06-05 16:50:53]: Step 8 of 20 Updating recovery media
[IC-F4912 2012-06-05 16:51:17]: Step 9 of 20 Extracting incoming image
[IC-F4912 2012-06-05 16:52:56]: Step 10 of 20 Unpacking OS packages
[IC-F4912 2012-06-05 16:52:59]: Step 11 of 20 Mounting jbase package
[IC-F4912 2012-06-05 16:53:28]: Step 12 of 20 Creating base OS symbolic links
[IC-F4912 2012-06-05 16:54:45]: Step 13 of 20 Creating fstab
[IC-F4912 2012-06-05 16:54:45]: Step 14 of 20 Creating new system files
[IC-F4912 2012-06-05 16:54:46]: Step 15 of 20 Adding jbundle package
[IC-F4912 2012-06-05 16:58:15]: Step 16 of 20 Backing up system data
[IC-F4912 2012-06-05 16:58:18]: Step 17 of 20 Setting up shared partition data
[IC-F4912 2012-06-05 16:58:18]: Step 18 of 20 Checking package sanity in
installation
[IC-F4912 2012-06-05 16:58:18]: Step 19 of 20 Unmounting and cleaning up
temporary file systems
[IC-F4912 2012-06-05 16:58:22]: Step 20 of 20 Setting da0s1 as new active
partition
[Status    2012-06-05 16:58:34]: Load completed with 0 errors...
[Status    2012-06-05 16:58:34]: Reboot is required to complete upgrade ...
[Status    2012-06-05 16:58:34]: Trying to Connect to Node: FC-0
[Status    2012-06-05 16:58:39]: Rebooting FC-0
[Status    2012-06-05 16:58:39]: Trying to Connect to Node: FC-1
[Status    2012-06-05 16:58:44]: Rebooting FC-1
[Status    2012-06-05 16:58:44]: Trying to Connect to Node: IC-F4912
[Status    2012-06-05 16:58:50]: Rebooting IC-F4912
Success

```

2. When the fabric components reboot, they appear as **Disconnected** in the output of the **show fabric administration inventory infrastructure fabric-controls** and **show fabric administration inventory interconnect-devices** commands.



```

session1@qfabric> show fabric administration inventory infrastructure fabric-controls
Item                      Identifier          Connection      Configuration
Fabric control
  FC-0                    Disconnected
  FC-1                    Disconnected

session1@qfabric> show fabric administration inventory interconnect-devices IC-F4912
Item                      Identifier          Connection      Configuration
Interconnect device
  IC-F4912                Disconnected
  F4912/RE0               Disconnected

```

3. When the fabric components return to full service, they appear as **Connected** in the output of the **show fabric administration inventory** command.

```

session1@qfabric> show fabric administration inventory
Item                      Identifier          Connection      Configuration
Node group
  NW-NG-0                 Connected          Configured

  P1507-C                 Connected

  RSNG                    Connected          Configured

  P1550-C                 Connected

  P1571-C                 Connected

Interconnect device
  IC-F4912                Connected          Configured
  F4912/RE0               Connected

Fabric manager
  FM-0                    Connected          Configured

Fabric control
  FC-0                    Connected          Configured
  FC-1                    Connected          Configured

Diagnostic routing engine
  DRE-0                   Connected          Configured

```

### Verifying a Redundant Server Node Group Nonstop Software Upgrade

- Purpose** During the redundant server Node group portion of a nonstop software upgrade, you should expect to see the backup Node device upgrade first, followed by the upgrade of the master Node device. Server Node groups with a single device upgrade the device in the same way as a standalone switch.
- Action** 1. In an SSH session to the QFabric CLI, issue the request for the redundant server Node group nonstop software upgrade.

```

root@qfabric> request system software nonstop-upgrade node-group RSNG
jinstall-qfabric-12.2X50-D10.3.rpm
Upgrading target(s): RSNG

```



```

[RSNG 2012-06-05 17:26:44]: Starting with package
ftp://169.254.0.3/pub/images/12.2X50-D10.3/jinstall-qfx.tgz
[RSNG 2012-06-05 17:26:44]: Retrieving package
[RSNG 2012-06-05 17:28:56]: Pushing bundle to fpc1
[RSNG 2012-06-05 17:29:26]: fpc1: Validate package...
[RSNG 2012-06-05 17:35:22]: fpc0: Validate package...
[RSNG 2012-06-05 17:35:49]: ----- fpc1 -----
[RSNG 2012-06-05 17:36:25]: Step 1 of 20 Creating temporary file system
[RSNG 2012-06-05 17:36:26]: Step 2 of 20 Determining installation source
[RSNG 2012-06-05 17:36:26]: Step 3 of 20 Processing format options
[RSNG 2012-06-05 17:36:26]: Step 4 of 20 Determining installation slice
[RSNG 2012-06-05 17:36:27]: Step 5 of 20 Creating and labeling new slices
[RSNG 2012-06-05 17:36:27]: Step 6 of 20 Create and mount new file system
[RSNG 2012-06-05 17:36:35]: Step 7 of 20 Getting OS bundles
[RSNG 2012-06-05 17:36:35]: Step 8 of 20 Updating recovery media
[RSNG 2012-06-05 17:36:56]: Step 9 of 20 Extracting incoming image
[RSNG 2012-06-05 17:38:07]: Step 10 of 20 Unpacking OS packages
[RSNG 2012-06-05 17:38:16]: Step 11 of 20 Mounting jbase package
[RSNG 2012-06-05 17:38:41]: Step 12 of 20 Creating base OS symbolic links
[RSNG 2012-06-05 17:39:41]: Step 13 of 20 Creating fstab
[RSNG 2012-06-05 17:39:42]: Step 14 of 20 Creating new system files
[RSNG 2012-06-05 17:39:42]: Step 15 of 20 Adding jbundle package
[RSNG 2012-06-05 17:42:16]: Step 16 of 20 Backing up system data
[RSNG 2012-06-05 17:42:32]: Step 17 of 20 Setting up shared partition data
[RSNG 2012-06-05 17:42:33]: Step 18 of 20 Checking package sanity in
installation
[RSNG 2012-06-05 17:42:33]: Step 19 of 20 Unmounting and cleaning up
temporary file systems
[RSNG 2012-06-05 17:42:36]: Step 20 of 20 Setting da0s2 as new active
partition
[RSNG 2012-06-05 17:42:51]: ----- fpc0 - master -----
[RSNG 2012-06-05 17:42:51]: Step 1 of 20 Creating temporary file system
[RSNG 2012-06-05 17:42:51]: Step 2 of 20 Determining installation source
[RSNG 2012-06-05 17:42:51]: Step 3 of 20 Processing format options
[RSNG 2012-06-05 17:42:51]: Step 4 of 20 Determining installation slice
[RSNG 2012-06-05 17:42:51]: Step 5 of 20 Creating and labeling new slices
[RSNG 2012-06-05 17:42:51]: Step 6 of 20 Create and mount new file system
[RSNG 2012-06-05 17:42:51]: Step 7 of 20 Getting OS bundles
[RSNG 2012-06-05 17:42:51]: Step 8 of 20 Updating recovery media
[RSNG 2012-06-05 17:42:51]: Step 9 of 20 Extracting incoming image
[RSNG 2012-06-05 17:42:51]: Step 10 of 20 Unpacking OS packages
[RSNG 2012-06-05 17:42:51]: Step 11 of 20 Mounting jbase package
[RSNG 2012-06-05 17:42:51]: Step 12 of 20 Creating base OS symbolic links
[RSNG 2012-06-05 17:42:51]: Step 13 of 20 Creating fstab
[RSNG 2012-06-05 17:42:51]: Step 14 of 20 Creating new system files
[RSNG 2012-06-05 17:42:51]: Step 15 of 20 Adding jbundle package
[RSNG 2012-06-05 17:42:51]: Step 16 of 20 Backing up system data
[RSNG 2012-06-05 17:42:51]: Step 17 of 20 Setting up shared partition data
[RSNG 2012-06-05 17:42:51]: Step 18 of 20 Checking package sanity in
installation
[RSNG 2012-06-05 17:42:51]: Step 19 of 20 Unmounting and cleaning up
temporary file systems
[RSNG 2012-06-05 17:42:51]: Step 20 of 20 Setting da0s2 as new active
partition
[RSNG 2012-06-05 17:43:36]: Rebooting Backup RE
[RSNG 2012-06-05 17:43:36]: ----- Rebooting fpc1 -----
[RSNG 2012-06-05 17:50:12]: Initiating Chassis In-Service-Upgrade
[RSNG 2012-06-05 17:50:33]: Upgrading group: 0 fpc: 0
[RSNG 2012-06-05 17:52:38]: Upgrade complete for group:0
[RSNG 2012-06-05 17:52:38]: Upgrading group: 1 fpc: 1
[RSNG 2012-06-05 17:54:42]: Upgrade complete for group:1

```



```

[RSNG 2012-06-05 17:54:42]: Finished processing all upgrade groups, last
group :1
[RSNG 2012-06-05 17:54:48]: Preparing for Switchover
[RSNG 2012-06-05 17:55:38]: Switchover Completed
[Status 2012-06-05 17:55:41]: Upgrade completed with 0 errors
Success

```

- During the redundant server Node group upgrade, the backup Node device (in this case, P1571-C) is upgraded first and appears in the **Disconnected** state in the output of the **show fabric administration inventory** command.

```
session1@qfabric> show fabric administration inventory
```

Item	Identifier	Connection	Configuration
Node group			
	NW-NG-0	Connected	Configured
	P1507-C	Connected	
	RSNG	Connected	Configured
	P1550-C	Connected	
	P1571-C	Disconnected	
Interconnect device			
	IC-F4912	Connected	Configured
	F4912/RE0	Connected	
Fabric manager			
	FM-0	Connected	Configured
Fabric control			
	FC-0	Connected	Configured
	FC-1	Connected	Configured
Diagnostic routing engine			
	DRE-0	Connected	Configured

- After the backup Node device comes back online, the master Node device (in this case, P1550-C) appears in the **Disconnected** state in the output of the **show fabric administration inventory** command while the master Node device upgrades its software.

```
session1@qfabric> show fabric administration inventory
```

Item	Identifier	Connection	Configuration
Node group			
	NW-NG-0	Connected	Configured
	P1507-C	Connected	
	RSNG	Connected	Configured
	P1550-C	Disconnected	
	P1571-C	Connected	
Interconnect device			
	IC-F4912	Connected	Configured
	F4912/RE0	Connected	



Fabric manager FM-0	Connected	Configured
Fabric control FC-0	Connected	Configured
FC-1	Connected	Configured
Diagnostic routing engine DRE-0	Connected	Configured

4. After both Node devices in the redundant server Node group come back online, both Node devices appear as **Connected** to indicate the successful completion of the Node group nonstop software upgrade step.

```
session1@qfabric> show fabric administration inventory
```

Item	Identifier	Connection	Configuration
Node group			
NW-NG-0		Connected	Configured
	P1507-C	Connected	
	RSNG	Connected	Configured
	P1550-C	Connected	
	P1571-C	Connected	
Interconnect device			
IC-F4912		Connected	Configured
	F4912/RE0	Connected	
Fabric manager			
FM-0		Connected	Configured
Fabric control			
FC-0		Connected	Configured
FC-1		Connected	Configured
Diagnostic routing engine			
DRE-0		Connected	Configured

### Verifying a Network Node Group Nonstop Software Upgrade

**Purpose** During the network Node group portion of a nonstop software upgrade, you should expect to see the backup network Node group Routing Engine upgrade first, followed by the Node devices within the network Node group upgrading one at a time, and ending with the upgrade of the master network Node group Routing Engine.



**NOTE:** If you configure an upgrade group for Node groups containing 2 or more Node devices, all Node devices within the upgrade group reboot at the same time.



- Action**
- In an SSH session to the QFabric CLI, issue the request for the network Node group nonstop software upgrade.

```
root@qfabric> request system software nonstop-upgrade node-group NW-NG-0
jinstall-qfabric-12.2X50-D10.3.rpm
Upgrading target(s): NW-NG-0
```

```
[NW-NG-0 2012-06-01 09:45:06]: Starting with package
ftp://169.254.0.3/pub/images/12.2X50-D10.3/jinstall-qfx.tgz
[NW-NG-0 2012-06-01 09:45:06]: Retrieving package
[NW-NG-0 2012-06-01 09:46:18]: Pushing bundle to fpc0
[NW-NG-0 2012-06-01 09:46:52]: fpc0: Validate package...
[NW-NG-0 2012-06-01 09:53:26]: ----- fpc0 -----
[NW-NG-0 2012-06-01 09:54:01]: Step 1 of 20 Creating temporary file system
[NW-NG-0 2012-06-01 09:54:01]: Step 2 of 20 Determining installation source
[NW-NG-0 2012-06-01 09:54:02]: Step 3 of 20 Processing format options
[NW-NG-0 2012-06-01 09:54:02]: Step 4 of 20 Determining installation slice
[NW-NG-0 2012-06-01 09:54:02]: Step 5 of 20 Creating and labeling new slices
[NW-NG-0 2012-06-01 09:54:03]: Step 6 of 20 Create and mount new file system
[NW-NG-0 2012-06-01 09:54:10]: Step 7 of 20 Getting OS bundles
[NW-NG-0 2012-06-01 09:54:10]: Step 8 of 20 Updating recovery media
[NW-NG-0 2012-06-01 09:54:31]: Step 9 of 20 Extracting incoming image
[NW-NG-0 2012-06-01 09:55:43]: Step 10 of 20 Unpacking OS packages
[NW-NG-0 2012-06-01 09:55:46]: Step 11 of 20 Mounting jbase package
[NW-NG-0 2012-06-01 09:56:09]: Step 12 of 20 Creating base OS symbolic links
[NW-NG-0 2012-06-01 09:57:05]: Step 13 of 20 Creating fstab
[NW-NG-0 2012-06-01 09:57:05]: Step 14 of 20 Creating new system files
[NW-NG-0 2012-06-01 09:57:05]: Step 15 of 20 Adding jbundle package
[NW-NG-0 2012-06-01 09:59:30]: Step 16 of 20 Backing up system data
[NW-NG-0 2012-06-01 09:59:44]: Step 17 of 20 Setting up shared partition data
[NW-NG-0 2012-06-01 09:59:44]: Step 18 of 20 Checking package sanity in
installation
[NW-NG-0 2012-06-01 09:59:44]: Step 19 of 20 Unmounting and cleaning up
temporary file systems
[NW-NG-0 2012-06-01 09:59:47]: Step 20 of 20 Setting da0s1 as new active
partition
[NW-NG-0 2012-06-01 09:59:55]: Starting with package
ftp://169.254.0.3/pub/images/12.2X50-D10.3/jinstall-dc-re.tgz
[NW-NG-0 2012-06-01 09:59:55]: Retrieving package
[NW-NG-0 2012-06-01 10:01:04]: Pushing bundle to re1
[NW-NG-0 2012-06-01 10:01:35]: re1: Validate package...
[NW-NG-0 2012-06-01 10:02:56]: re0: Validate package...
[NW-NG-0 2012-06-01 10:04:45]: Rebooting Backup RE
[NW-NG-0 2012-06-01 10:08:31]: Initiating Chassis In-Service-Upgrade
[NW-NG-0 2012-06-01 10:08:52]: Upgrading group: 0 fpc: 0
[NW-NG-0 2012-06-01 10:18:33]: Upgrade complete for group:0
[NW-NG-0 2012-06-01 10:18:33]: Finished processing all upgrade groups, last
group :0
[NW-NG-0 2012-06-01 10:18:37]: Preparing for Switchover
[NW-NG-0 2012-06-01 10:18:55]: Switchover Completed
[Status 2012-06-01 10:18:58]: Upgrade completed with 0 errors
Success
```

- Verify the progress of the upgrade by issuing the **show chassis nonstop-upgrade node-group**, **show fabric administration inventory**, **show fabric administration inventory infrastructure**, and **show fabric administration inventory node-groups NW-NG-0** commands. You should see the backup network Node group Routing Engine reboot first, followed by each Node device within the network Node group, and ending with the reboot of master network Node group Routing Engine. Restarting devices appear as **Disconnected** in the output of the **show fabric administration inventory** command



and restarting Routing Engines do not appear in output of the **show fabric administration inventory infrastructure** command until they return to service.

**Related  
Documentation**

- [Performing a Nonstop Software Upgrade on the QFabric System on page 80](#)
- [Understanding Nonstop Software Upgrade for QFabric Systems on page 1770](#)
- [show chassis nonstop-upgrade node-group on page 767](#)
- show fabric administration inventory
- show fabric administration inventory director-group status
- show fabric administration inventory infrastructure
- show fabric administration inventory interconnect-devices
- show fabric administration inventory node-groups



## request system software nonstop-upgrade

---

<b>Syntax</b>	<code>request system software nonstop-upgrade <i>package-name</i></code> <code>&lt;fabric &gt;</code> <code>&lt;director-group&gt;</code> <code>&lt;node-group <i>name</i>&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Nonstop software upgrade enables you to upgrade a QFabric system with minimal packet loss and maximum uptime. You should upgrade the devices in the following order: Director group, fabric controls and Interconnect devices, and network and server Node groups.
<b>Options</b>	<p><b><i>package-name</i></b>—Location from which the software is to be installed. For example:</p> <ul style="list-style-type: none"><li>• <b><i>protocol://hostname/pathname/package-name</i></b>—For a software package or bundle that is to be downloaded and installed from a remote location. Replace <b><i>protocol</i></b> with one of the following:<ul style="list-style-type: none"><li>• <b>ftp</b>—File Transfer Protocol. Use <b><i>ftp://hostname/pathname/package-name</i></b>. To specify authentication credentials, use <b><i>ftp://&lt;username&gt;:&lt;password&gt;@hostname/pathname/package-name</i></b>. To have the system prompt you for the password, specify <b>prompt</b> in place of the password. If a password is required, and you do not specify the password or <b>prompt</b>, an error message is displayed.</li><li>• <b>http</b>—Hypertext Transfer Protocol. Use <b><i>http://hostname/pathname/package-name</i></b>. To specify authentication credentials, use <b><i>http://&lt;username&gt;:&lt;password&gt;@hostname/pathname/package-name</i></b>. If a password is required and you omit it, you are prompted for it.</li><li>• <b>scp</b>—Secure copy (available only for Canada and U.S. version). Use <b><i>scp://hostname/pathname/package-name</i></b>. To specify authentication credentials, use <b><i>scp://&lt;username&gt;:&lt;password&gt;@hostname/pathname/package-name</i></b>.</li></ul></li></ul>



---

**NOTE:**

- The ***pathname*** in the protocol is the relative path to the user's home directory on the remote system and not the root directory.
- 

**director-group**—Install software package on the Director group and Fabric managers.

**fabric**—Install software package on the Interconnect devices and Fabric controls.

**node-group *name*** —Install software package on the redundant server Node group, server Node group, or network Node group.



<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Performing a Nonstop Software Upgrade on the QFabric System on page 80</a></li> <li>• <a href="#">Verifying Nonstop Software Upgrade for QFabric Systems on page 1868</a></li> <li>• <a href="#">show chassis nonstop-upgrade node-group on page 767</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">request system software nonstop-upgrade director-group on page 1889</a> <a href="#">request system software nonstop-upgrade fabric on page 1891</a> <a href="#">request system software nonstop-upgrade node-group (Redundant Server Node Group) on page 1892</a> <a href="#">request system software nonstop-upgrade node-group (Server Node Group) on page 1894</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

**request system  
software**

```
user@qfabric> request system software nonstop-upgrade director-group
jinstall-qfabric-12.2X50-D10.3.rpm
Validating update package jinstall-qfabric-12.2X50-D10.3.rpm
Installing update package jinstall-qfabric-12.2X50-D10.3.rpm
```



**nonstop-upgrade  
director-group**

```
Installing fabric images version 12.2X50-D10.3
Performing cleanup
Package install complete
Installing update package jinstall-qfabric-12.2X50-D10.3.rpm on peer
Triggering Initial Stage of Fabric Manager Upgrade
Updating CCIF default image to 12.2X50-D10.3
Updating FM-0 to Junos version 12.2X50-D10.3
[Status 2012-06-05 15:25:29]: Fabric Manager: Upgrade Initial Stage started
[FM-0 2012-06-05 15:25:38]: FM-0 Master already running on LOCAL DG
[NW-NG-0 2012-06-05 15:25:45]: NW-NG-0 Master already running on LOCAL DG
[FM-0 2012-06-05 15:26:12]: Retrieving package
[FM-0 2012-06-05 15:27:11]: Pushing bundle to re0
[Status 2012-06-05 15:29:06]: Load completed with 0 errors...
[Status 2012-06-05 15:29:06]: Reboot is required to complete upgrade ...
[Status 2012-06-05 15:29:07]: Trying to Connect to Node: FM-0
[Status 2012-06-05 15:29:13]: Rebooting FM-0
[FM-0 2012-06-05 15:29:13]: Waiting for FM-0 to terminate ...
Starting Peer upgrade

Initiating rolling upgrade of Director peer: version 12.2X50-D10.3

Inform CCIF regarding rolling upgrade
[Peer Update Status]: Validating install package jinstall-qfabric-12.2X50-D10.3.rpm
[Peer Update Status]: Cleaning up node for rolling phase one upgrade
[Peer Update Status]: Director group upgrade complete
[Peer Update Status]: COMPLETED
[Peer Update Status]: Waiting for peer to reboot and start phase one of rolling
upgrade
[Peer Update Status]: Waiting for peer to reboot and start phase one of rolling
upgrade
[Peer Update Status]: Waiting for peer to reboot and start phase one of rolling
upgrade
[Peer Update Status]: Waiting for peer to reboot and start phase one of rolling
upgrade
[Peer Update Status]: Waiting for peer to reboot and start phase one of rolling
upgrade
[Peer Update Status]: Waiting for peer to reboot and start phase one of rolling
upgrade
[Peer Update Status]: Waiting for peer to reboot and start phase one of rolling
upgrade
[Peer Update Status]: Waiting for peer to reboot and start phase one of rolling
upgrade
[Peer Update Status]: Waiting for peer to reboot and start phase one of rolling
upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase one
of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase one
of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase one
of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase one
of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase one
of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase one
of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase one
of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase one
of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase one
of rolling upgrade
```



```

of rolling upgrade
[Peer Update Status]: Waiting for peer to return after reboot and start phase one
of rolling upgrade
[Peer Update Status]: Waiting for peer to complete phase one of rolling upgrade
[Peer Update Status]: Peer completed phase one of rolling upgrade
Setting peer DG node as the master SFC

Delaying start of local upgrade to allow peer services time to initialize [15
minutes]
Delaying start of local upgrade to allow peer services time to initialize [15
minutes]
Delaying start of local upgrade to allow peer services time to initialize [12
minutes]
Delaying start of local upgrade to allow peer services time to initialize [9
minutes]
Delaying start of local upgrade to allow peer services time to initialize [6
minutes]
Delaying start of local upgrade to allow peer services time to initialize [3
minutes]
[Peer Update Status]: Check for VMs on dg0
Triggering Final Stage of Fabric Manager Upgrade:
Updating FM-0 to Junos version 12.2X50-D10.3
[Status 2012-06-05 16:10:12]: Fabric Manager: Upgrade Final Stage started
[NW-NG-0 2012-06-05 16:10:22]: Transferring NW-NG-0 Mastership to REMOTE DG
[NW-NG-0 2012-06-05 16:11:44]: Finished NW-NG-0 Mastership switch
[Status 2012-06-05 16:11:45]: Upgrading FM-0 VM on worker DG to 12.2X50-D10.3
[DRE-0 2012-06-05 16:12:43]: Retrieving package
[DRE-0 2012-06-05 16:13:46]: ----- re0: -----
[Status 2012-06-05 16:15:17]: Load completed with 0 errors...
[Status 2012-06-05 16:15:17]: Reboot is required to complete upgrade ...
[DRE-0 2012-06-05 16:15:22]: Waiting for DRE-0 to terminate ...
[DRE-0 2012-06-05 16:15:34]: Waiting for DRE-0 to come back ...
[DRE-0 2012-06-05 16:18:44]: Running Uptime Test for DRE-0
[DRE-0 2012-06-05 16:18:51]: Uptime Test for DRE-0 Passed ...
[Status 2012-06-05 16:18:51]: DRE-0 booted successfully ...
Performing post install shutdown and cleanup

Broadcast message from root (Tue Jun 5 16:18:51 2012):

The system is going down for reboot NOW!
Director group upgrade complete

root@qfabric> Read from remote host qfabric-partition0: Connection reset by peer
Connection to qfabric-partition0 closed.

```

request system  
software

```

user@qfabric> request system software nonstop-upgrade fabric
jinstall-qfabric-12.2X50-D10.3.rpm
[FC-0 2012-06-05 16:48:53]: Retrieving package
[FC-1 2012-06-05 16:48:53]: Retrieving package

```



**nonstop-upgrade  
fabric**

```
[IC-F4912 2012-06-05 16:48:59]: Retrieving package
[FC-0      2012-06-05 16:49:51]: ----- re0: -----
[FC-1      2012-06-05 16:49:52]: ----- re0: -----
[IC-F4912 2012-06-05 16:49:54]: ----- re0: -----
[IC-F4912 2012-06-05 16:50:42]: Step 1 of 20 Creating temporary file system
[IC-F4912 2012-06-05 16:50:42]: Step 2 of 20 Determining installation source
[IC-F4912 2012-06-05 16:50:43]: Step 3 of 20 Processing format options
[IC-F4912 2012-06-05 16:50:43]: Step 4 of 20 Determining installation slice
[IC-F4912 2012-06-05 16:50:43]: Step 5 of 20 Creating and labeling new slices
[IC-F4912 2012-06-05 16:50:44]: Step 6 of 20 Create and mount new file system
[IC-F4912 2012-06-05 16:50:53]: Step 7 of 20 Getting OS bundles
[IC-F4912 2012-06-05 16:50:53]: Step 8 of 20 Updating recovery media
[IC-F4912 2012-06-05 16:51:17]: Step 9 of 20 Extracting incoming image
[IC-F4912 2012-06-05 16:52:56]: Step 10 of 20 Unpacking OS packages
[IC-F4912 2012-06-05 16:52:59]: Step 11 of 20 Mounting jbase package
[IC-F4912 2012-06-05 16:53:28]: Step 12 of 20 Creating base OS symbolic links
[IC-F4912 2012-06-05 16:54:45]: Step 13 of 20 Creating fstab
[IC-F4912 2012-06-05 16:54:45]: Step 14 of 20 Creating new system files
[IC-F4912 2012-06-05 16:54:46]: Step 15 of 20 Adding jbundle package
[IC-F4912 2012-06-05 16:58:15]: Step 16 of 20 Backing up system data
[IC-F4912 2012-06-05 16:58:18]: Step 17 of 20 Setting up shared partition data
[IC-F4912 2012-06-05 16:58:18]: Step 18 of 20 Checking package sanity in
installation
[IC-F4912 2012-06-05 16:58:18]: Step 19 of 20 Unmounting and cleaning up temporary
file systems
[IC-F4912 2012-06-05 16:58:22]: Step 20 of 20 Setting da0s1 as new active partition
[Status    2012-06-05 16:58:34]: Load completed with 0 errors...
[Status    2012-06-05 16:58:34]: Reboot is required to complete upgrade ...
[Status    2012-06-05 16:58:34]: Trying to Connect to Node: FC-0
[Status    2012-06-05 16:58:39]: Rebooting FC-0
[Status    2012-06-05 16:58:39]: Trying to Connect to Node: FC-1
[Status    2012-06-05 16:58:44]: Rebooting FC-1
[Status    2012-06-05 16:58:44]: Trying to Connect to Node: IC-F4912
[Status    2012-06-05 16:58:50]: Rebooting IC-F4912
Success
```

**request system  
software  
nonstop-upgrade  
node-group**

```
user@qfabric> request system software nonstop-upgrade node-group RSNG
jinstall-qfabric-12.2X50-D10.3.rpm
Upgrading target(s): RSNG

[RSNG      2012-06-05 17:26:44]: Starting with package
```



(Redundant Server  
Node Group)

```

ftp://169.254.0.3/pub/images/12.2X50-D10.3/jinstall-qfx.tgz
[RSNG 2012-06-05 17:26:44]: Retrieving package
[RSNG 2012-06-05 17:28:56]: Pushing bundle to fpc1
[RSNG 2012-06-05 17:29:26]: fpc1: Validate package...
[RSNG 2012-06-05 17:35:22]: fpc0: Validate package...
[RSNG 2012-06-05 17:35:49]: ----- fpc1 -----
[RSNG 2012-06-05 17:36:25]: Step 1 of 20 Creating temporary file system
[RSNG 2012-06-05 17:36:26]: Step 2 of 20 Determining installation source
[RSNG 2012-06-05 17:36:26]: Step 3 of 20 Processing format options
[RSNG 2012-06-05 17:36:26]: Step 4 of 20 Determining installation slice
[RSNG 2012-06-05 17:36:27]: Step 5 of 20 Creating and labeling new slices
[RSNG 2012-06-05 17:36:27]: Step 6 of 20 Create and mount new file system
[RSNG 2012-06-05 17:36:35]: Step 7 of 20 Getting OS bundles
[RSNG 2012-06-05 17:36:35]: Step 8 of 20 Updating recovery media
[RSNG 2012-06-05 17:36:56]: Step 9 of 20 Extracting incoming image
[RSNG 2012-06-05 17:38:07]: Step 10 of 20 Unpacking OS packages
[RSNG 2012-06-05 17:38:16]: Step 11 of 20 Mounting jbase package
[RSNG 2012-06-05 17:38:41]: Step 12 of 20 Creating base OS symbolic links
[RSNG 2012-06-05 17:39:41]: Step 13 of 20 Creating fstab
[RSNG 2012-06-05 17:39:42]: Step 14 of 20 Creating new system files
[RSNG 2012-06-05 17:39:42]: Step 15 of 20 Adding jbundle package
[RSNG 2012-06-05 17:42:16]: Step 16 of 20 Backing up system data
[RSNG 2012-06-05 17:42:32]: Step 17 of 20 Setting up shared partition data
[RSNG 2012-06-05 17:42:33]: Step 18 of 20 Checking package sanity in
installation
[RSNG 2012-06-05 17:42:33]: Step 19 of 20 Unmounting and cleaning up temporary
file systems
[RSNG 2012-06-05 17:42:36]: Step 20 of 20 Setting da0s2 as new active partition
[RSNG 2012-06-05 17:42:51]: ----- fpc0 - master -----
[RSNG 2012-06-05 17:42:51]: Step 1 of 20 Creating temporary file system
[RSNG 2012-06-05 17:42:51]: Step 2 of 20 Determining installation source
[RSNG 2012-06-05 17:42:51]: Step 3 of 20 Processing format options
[RSNG 2012-06-05 17:42:51]: Step 4 of 20 Determining installation slice
[RSNG 2012-06-05 17:42:51]: Step 5 of 20 Creating and labeling new slices
[RSNG 2012-06-05 17:42:51]: Step 6 of 20 Create and mount new file system
[RSNG 2012-06-05 17:42:51]: Step 7 of 20 Getting OS bundles
[RSNG 2012-06-05 17:42:51]: Step 8 of 20 Updating recovery media
[RSNG 2012-06-05 17:42:51]: Step 9 of 20 Extracting incoming image
[RSNG 2012-06-05 17:42:51]: Step 10 of 20 Unpacking OS packages
[RSNG 2012-06-05 17:42:51]: Step 11 of 20 Mounting jbase package
[RSNG 2012-06-05 17:42:51]: Step 12 of 20 Creating base OS symbolic links
[RSNG 2012-06-05 17:42:51]: Step 13 of 20 Creating fstab
[RSNG 2012-06-05 17:42:51]: Step 14 of 20 Creating new system files
[RSNG 2012-06-05 17:42:51]: Step 15 of 20 Adding jbundle package
[RSNG 2012-06-05 17:42:51]: Step 16 of 20 Backing up system data
[RSNG 2012-06-05 17:42:51]: Step 17 of 20 Setting up shared partition data
[RSNG 2012-06-05 17:42:51]: Step 18 of 20 Checking package sanity in
installation
[RSNG 2012-06-05 17:42:51]: Step 19 of 20 Unmounting and cleaning up temporary
file systems
[RSNG 2012-06-05 17:42:51]: Step 20 of 20 Setting da0s2 as new active partition
[RSNG 2012-06-05 17:43:36]: Rebooting Backup RE
[RSNG 2012-06-05 17:43:36]: ----- Rebooting fpc1 -----
[RSNG 2012-06-05 17:50:12]: Initiating Chassis In-Service-Upgrade
[RSNG 2012-06-05 17:50:33]: Upgrading group: 0 fpc: 0
[RSNG 2012-06-05 17:52:38]: Upgrade complete for group:0
[RSNG 2012-06-05 17:52:38]: Upgrading group: 1 fpc: 1
[RSNG 2012-06-05 17:54:42]: Upgrade complete for group:1
[RSNG 2012-06-05 17:54:42]: Finished processing all upgrade groups, last group
:1
[RSNG 2012-06-05 17:54:48]: Preparing for Switchover

```



```
[RSNG    2012-06-05 17:55:38]: Switchover Completed
[Status  2012-06-05 17:55:41]: Upgrade completed with 0 errors
Success
```

**request system  
software  
nonstop-upgrade  
node-group (Server  
Node Group)**

```
user@qfabric> request system software nonstop-upgrade node-group P1507-C
jinstall-qfabric-12.2X50-D10.3.rpm
Upgrading target(s): P1507-C

[P1507-C 2012-06-26 14:02:44]: Retrieving package
[P1507-C 2012-06-26 14:03:21]: ----- P1507-C: -----
[P1507-C 2012-06-26 14:03:59]: Step 1 of 20 Creating temporary file system
[P1507-C 2012-06-26 14:03:59]: Step 2 of 20 Determining installation source
[P1507-C 2012-06-26 14:03:59]: Step 3 of 20 Processing format options
[P1507-C 2012-06-26 14:03:59]: Step 4 of 20 Determining installation slice
[P1507-C 2012-06-26 14:04:00]: Step 5 of 20 Creating and labeling new slices
[P1507-C 2012-06-26 14:04:00]: Step 6 of 20 Create and mount new file system
[P1507-C 2012-06-26 14:04:08]: Step 7 of 20 Getting OS bundles
[P1507-C 2012-06-26 14:04:09]: Step 8 of 20 Updating recovery media
[P1507-C 2012-06-26 14:04:29]: Step 9 of 20 Extracting incoming image
[P1507-C 2012-06-26 14:05:42]: Step 10 of 20 Unpacking OS packages
[P1507-C 2012-06-26 14:05:49]: Step 11 of 20 Mounting jbase package
[P1507-C 2012-06-26 14:06:14]: Step 12 of 20 Creating base OS symbolic links
[P1507-C 2012-06-26 14:07:15]: Step 13 of 20 Creating fstab
[P1507-C 2012-06-26 14:07:15]: Step 14 of 20 Creating new system files
[P1507-C 2012-06-26 14:07:16]: Step 15 of 20 Adding jbundle package
[P1507-C 2012-06-26 14:09:52]: Step 16 of 20 Backing up system data
[P1507-C 2012-06-26 14:10:07]: Step 17 of 20 Setting up shared partition data
[P1507-C 2012-06-26 14:10:07]: Step 18 of 20 Checking package sanity in
installation
[P1507-C 2012-06-26 14:10:08]: Step 19 of 20 Unmounting and cleaning up temporary
file systems
[P1507-C 2012-06-26 14:10:11]: Step 20 of 20 Setting da0s2 as new active partition
[Status  2012-06-26 14:10:25]: Trying to Connect to Node: P1507-C
[Status  2012-06-26 14:10:32]: Rebooting P1507-C
[Status  2012-06-26 14:10:32]: Upgrade completed with 0 errors
Success
```



## show chassis nonstop-upgrade node-group

<b>Syntax</b>	<b>show chassis nonstop-upgrade node-group <i>node-group-name</i></b>
<b>Release Information</b>	Command introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Display the status of the Node group after the most recent nonstop software upgrade (NSSU).
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Performing a Nonstop Software Upgrade on the QFabric System on page 80</a></li> <li>• <a href="#">request system software nonstop-upgrade on page 363</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show chassis nonstop-upgrade node-group on page 1895</a>
<b>Output Fields</b>	Table 53 on page 767 lists the output fields for the <b>show chassis nonstop-upgrade node-group</b> command. Output fields are listed in the approximate order in which they appear.

**Table 144: show chassis nonstop-upgrade node-group Output Fields**

Field Name	Field Description
<b>Item</b>	Node device slot number.
<b>Status</b>	State of Node device: <ul style="list-style-type: none"> <li>• <b>Error</b>—Node device is in an error state.</li> <li>• <b>Offline</b>—Node device is powered down.</li> <li>• <b>Online</b>—Node device is online and running.</li> </ul>
<b>Reason</b>	Reason for the state (if the line card is offline).

## Sample Output

```
show chassis
nonstop-upgrade
node-group
```

```
user@qfabric> show chassis nonstop-upgrade node-group NW-NG-0
Item           Status      Reason
P1550-C       Online
```

## Operational Mode Commands for VRRP



## show vrrp

<b>Syntax</b>	<pre>show vrrp &lt;brief   detail   extensive   summary&gt; &lt;interface <i>interface-name</i>&gt; &lt;track interfaces&gt;</pre>
<b>Release Information</b>	Statement introduced in Junos OS Release 10.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Display information and status about VRRP groups.
<b>Options</b>	<p><b>none</b>—(Same as brief) Display brief status information about all VRRP interfaces.</p> <p><b>brief   detail   extensive   summary</b>—(Optional) Display the specified level of output.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Display information and status about the specified VRRP interface.</p> <p><b>track interfaces</b>—(Optional) Display information and status about VRRP track interfaces.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Configuring VRRP for IPv6 (CLI Procedure)</li> </ul>
<b>List of Sample Output</b>	<a href="#">show vrrp on page 1902</a> <a href="#">show vrrp brief on page 1902</a> <a href="#">show vrrp detail (IPv6) on page 1902</a> <a href="#">show vrrp detail (Route Track) on page 1902</a> <a href="#">show vrrp extensive on page 1903</a> <a href="#">show vrrp interface on page 1904</a> <a href="#">show vrrp summary on page 1905</a> <a href="#">show vrrp track detail on page 1905</a> <a href="#">show vrrp track summary on page 1905</a>
<b>Output Fields</b>	<a href="#">Table 145 on page 1896</a> lists the output fields for the <b>show vrrp</b> command. Output fields are listed in the approximate order in which they appear.

**Table 145: show vrrp Output Fields**

Field Name	Field Description	Level of Output
<b>Interface</b>	Name of the logical interface.	<b>none, brief, extensive, summary</b>
<b>Interface index</b>	Physical interface index number, which reflects its initialization sequence.	<b>extensive</b>
<b>Groups</b>	Total number of VRRP groups configured on the interface.	<b>extensive</b>



Table 145: show vrrp Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Active</b>	Total number of VRRP groups that are active (that is, whose interface state is either up or down).	<b>extensive</b>
<b>Interface VRRP PDU statistics</b>	Nonerrored statistics for the logical interface: <ul style="list-style-type: none"> <li>• <b>Advertisement sent</b>—Number of VRRP advertisement protocol data units (PDUs) that the interface has transmitted.</li> <li>• <b>Advertisement received</b>—Number of VRRP advertisement PDUs received by the interface.</li> <li>• <b>Packets received</b>—Number of VRRP packets received for VRRP groups on the interface.</li> <li>• <b>No group match received</b>—Number of VRRP packets received for VRRP groups that do not exist on the interface.</li> </ul>	<b>extensive</b>
<b>Interface VRRP PDU error statistics</b>	Errored statistics for the logical interface: <ul style="list-style-type: none"> <li>• <b>Invalid IPAH next type received</b>—Number of packets received that use the IP Authentication Header protocol (IPAH) and that do not encapsulate VRRP packets.</li> <li>• <b>Invalid VRRP ttl value received</b>—Number of packets received whose IP time-to-live (TTL) value is not 255.</li> <li>• <b>Invalid VRRP version received</b>—Number of packets received whose VRRP version is not 2.</li> <li>• <b>Invalid VRRP pdu type received</b>—Number of packets received whose VRRP PDU type is not 1.</li> <li>• <b>Invalid VRRP authentication type received</b>—Number of packets received whose VRRP authentication is not none, simple, or md5.</li> <li>• <b>Invalid VRRP IP count received</b>—Number of packets received whose VRRP IP count exceeds 8.</li> <li>• <b>Invalid VRRP checksum received</b>—Number of packets received whose VRRP checksum does not match the calculated value.</li> </ul>	<b>extensive</b>
<b>Physical interface</b>	Name of the physical interface.	<b>detail, extensive</b>
<b>Unit</b>	Logical unit number.	All levels
<b>Address</b>	Address of the physical interface.	<b>none, brief, detail, extensive</b>
<b>Index</b>	Physical interface index number, which reflects its initialization sequence.	<b>detail, extensive</b>
<b>SNMP ifIndex</b>	SNMP index number for the physical interface.	<b>detail, extensive</b>
<b>VRRP-Traps</b>	Status of VRRP traps: <b>Enabled</b> or <b>Disabled</b> .	<b>detail, extensive</b>



Table 145: show vrrp Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Type and Address</b>	Identifier for the address and the address itself: <ul style="list-style-type: none"> <li><b>lcl</b>—Configured local interface address.</li> <li><b>mas</b>—Address of the master virtual router. This address is displayed only when the local interface is acting as a backup router.</li> <li><b>vip</b>—Configured virtual IP addresses.</li> </ul>	none, brief, summary
<b>Interface state or Int state</b>	State of the physical interface: <ul style="list-style-type: none"> <li><b>down</b>—The device is present and the link is unavailable.</li> <li><b>not present</b>—The interface is configured, but no physical device is present.</li> <li><b>unknown</b>—The VRRP process has not had time to query the kernel about the state of the interface.</li> <li><b>up</b>—The device is present and the link is established.</li> </ul>	none, brief, extensive, summary
<b>Group</b>	VRRP group number.	none, brief, extensive, summary
<b>State</b>	VRRP state: <ul style="list-style-type: none"> <li><b>backup</b>—The interface is acting as the backup router interface.</li> <li><b>bringup</b>—VRRP is just starting, and the physical device is not yet present.</li> <li><b>idle</b>—VRRP is configured on the interface and is disabled. This can occur when VRRP is first enabled on an interface whose link is established.</li> <li><b>initializing</b>—VRRP is initializing.</li> <li><b>master</b>—The interface is acting as the master router interface.</li> <li><b>transition</b>—The interface is changing between being the backup and being the master router.</li> </ul>	extensive
<b>Priority</b>	Configured VRRP priority for the interface.	detail, extensive
<b>Advertisement interval</b>	Configured VRRP advertisement interval.	detail, extensive
<b>Authentication type</b>	Configured VRRP authentication type: <b>none</b> , <b>simple</b> , or <b>md5</b> .	detail, extensive
<b>Preempt</b>	Whether preemption is allowed on the interface: <b>yes</b> or <b>no</b> .	detail, extensive
<b>Accept-data mode</b>	Whether the interface is configured to accept packets destined for the virtual IP address: <b>yes</b> or <b>no</b> .	detail, extensive
<b>VIP count</b>	Number of virtual IP addresses that have been configured on the interface.	detail, extensive
<b>VIP</b>	List of virtual IP addresses configured on the interface.	detail, extensive
<b>Advertisement timer</b>	Time until the advertisement timer expires.	detail, extensive



Table 145: show vrrp Output Fields (*continued*)

Field Name	Field Description	Level of Output
Master router	IP address of the interface that is acting as the master. If the VRRP interface is down, the output is <b>N/A</b> .	detail, extensive
Virtual router uptime	Time that the virtual router has been up.	detail, extensive
Master router uptime	Time that the master router has been up.	detail, extensive
Virtual MAC	MAC address associated with the virtual IP address.	detail, extensive
Tracking	Whether tracking is <b>enabled</b> or <b>disabled</b> .	detail, extensive
Current priority	Current operational priority for being the VRRP master.	detail, extensive
Configured priority	Configured base priority for being the VRRP master.	detail, extensive
Priority hold-time	Minimum time interval, in seconds, between successive changes to the current priority. <b>Disabled</b> indicates no minimum interval.	detail, extensive
Remaining-time	( <b>track</b> option only) Displays the time remaining in the priority hold-time interval.	detail
Interface tracking	Whether interface tracking is enabled or disabled. When enabled, the output also displays the number of tracked interfaces.	detail extensive
Interface/Tracked interface	Name of the tracked interface.	detail extensive
Int state/Interface state	Current operational state of the tracked interface: <b>up</b> or <b>down</b> .	detail, extensive
Int speed/Speed	Current operational speed, in bits per second, of the tracked interface.	detail, extensive
Incurred priority cost	Operational priority cost incurred due to the state and speed of this tracked interface. This cost is applied to the configured priority to obtain the current priority.	detail, extensive
Threshold	Speed below which the corresponding priority cost is incurred. In other words, when the speed of the interface drops below the threshold speed, the corresponding priority cost is incurred.  An entry of <b>down</b> means that the corresponding priority cost is incurred when the interface is down.	detail, extensive
Route tracking	Whether route tracking is enabled or disabled. When enabled, the output also displays the number of tracked routes.	detail, extensive
Route count	The number of routes being tracked.	detail, extensive



Table 145: show vrrp Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Route</b>	The IP address of the route being tracked.	<b>detail, extensive</b>
<b>VRF name</b>	The VPN routing and forwarding (VRF) routing instance that the tracked route is in.	<b>detail, extensive</b>
<b>Route state</b>	The state of the route being tracked: <b>up</b> , <b>down</b> , or <b>unknown</b> .	<b>detail, extensive</b>
<b>Priority cost</b>	Configured priority cost. This value is incurred when the interface speed drops below the corresponding threshold or when the tracked route goes down.	<b>detail, extensive</b>
<b>Active</b>	Whether the threshold is active (*). If the threshold is active, the corresponding priority cost is incurred.	<b>detail, extensive</b>
<b>Group VRRP PDU statistics</b>	Number of VRRP advertisements sent and received by the group.	<b>extensive</b>
<b>Group VRRP PDU error statistics</b>	<p>Errored statistics for the VRRP group:</p> <ul style="list-style-type: none"> <li>• <b>Bad authentication type received</b>—Number of VRRP PDUs received with an invalid authentication type. The received authentication can be <b>none</b>, <b>simple</b>, or <b>md5</b> and must be the same for all routers in the VRRP group.</li> <li>• <b>Bad password received</b>—Number of VRRP PDUs received with an invalid key (password). The password for simple authentication must be the same for all routers in the VRRP group.</li> <li>• <b>Bad MD5 digest received</b>—Number of VRRP PDUs received for which the MD5 digest computed from the VRRP PDU differs from the digest expected by the VRRP instance configured on the router.</li> <li>• <b>Bad advertisement timer received</b>—Number of VRRP PDUs received with an advertisement time interval that is inconsistent with the one in use among the routers in the VRRP group.</li> <li>• <b>Bad VIP count received</b>—Number of VRRP PDUs whose virtual IP address counts differ from the count that has been configured on the VRRP instance.</li> <li>• <b>Bad VIPADDR received</b>—Number of VRRP PDUs whose virtual IP addresses differ from the list of virtual IP addresses configured on the VRRP instance.</li> </ul>	<b>extensive</b>
<b>Group state transition statistics</b>	<p>State transition statistics for the VRRP group:</p> <ul style="list-style-type: none"> <li>• <b>Idle to master transitions</b>—Number of times that the VRRP instance transitioned from the idle state to the master state.</li> <li>• <b>Idle to backup transitions</b>—Number of times that the VRRP instance transitioned from the idle state to the backup state.</li> <li>• <b>Backup to master transitions</b>—Number of times that the VRRP instance transitioned from the backup state to the master state.</li> <li>• <b>Master to backup transitions</b>—Number of times that the VRRP instance transitioned from the master state to the backup state.</li> </ul>	<b>extensive</b>
<b>Vlan-id</b>	ID of Vlan	<b>detail</b>



Table 145: show vrrp Output Fields (*continued*)

Field Name	Field Description	Level of Output
VR state	<p>VRRP information:</p> <ul style="list-style-type: none"><li>• <b>backup</b>—The interface is acting as the backup router interface.</li><li>• <b>bringup</b>—VRRP is just starting, and the physical device is not yet present.</li><li>• <b>idle</b>—VRRP is configured on the interface and is disabled. This can occur when VRRP is first enabled on an interface whose link is established.</li><li>• <b>initializing</b>—VRRP is initializing.</li><li>• <b>master</b>—The interface is acting as the master router interface.</li><li>• <b>transition</b>—The interface is changing between being the backup and being the master router.</li></ul>	<b>none, brief</b>
Timer	<p>VRRP timer information:</p> <ul style="list-style-type: none"><li>• <b>A</b>—Time, in seconds, until the advertisement timer expires.</li><li>• <b>D</b>—Time, in seconds, until the Master is Dead timer expires.</li></ul>	<b>none, brief</b>



## Sample Output

### show vrrp

```

user@host> show vrrp
Interface      State      Group  VR state  Timer  Type  Address
ge-0/0/0.121   up         1      master    A 1.052 1c1  gec0::12:1:1:1
                                     vip  gec80::12:1:1:99
                                     vip  gec0::12:1:1:99
ge-0/0/2.131   up         1      master    A 0.364 1c1  gec0::13:1:1:1
                                     vip  gec80::13:1:1:99
                                     vip  gec0::13:1:1:99

```

### show vrrp brief

The output for the **show vrrp brief** command is identical to that for the **show vrrp** command. For sample output, see [show vrrp on page 1902](#).

### show vrrp detail (IPv6)

```

user@host> show vrrp detail
Physical interface: ge-0/0/0, Unit: 121, Vlan-id: 212, Address: gec0::12:1:1:1/120

Index: 67, SNMP ifIndex: 45, VRRP-Traps: enabled
Interface state: up, Group: 1, State: master
Priority: 200, Advertisement interval: 1, Authentication type: none
Preempt: yes, Accept-data mode: no, VIP count: 2, VIP: gec80::12:1:1:99,
gec0::12:1:1:99
Advertisement timer: 1.121s, Master router: gec80::12:1:1:1
Virtual router uptime: 00:03:47, Master router uptime: 00:03:41
Virtual MAC: 00:00:5e:00:02:01
Tracking: disabled

Physical interface: ge-0/0/2, Unit: 131, Vlan-id: 213, Address: gec0::13:1:1:1/120

Index: 69, SNMP ifIndex: 47, VRRP-Traps: enabled
Interface state: up, Group: 1, State: master
Priority: 200, Advertisement interval: 1, Authentication type: none
Preempt: yes, Accept-data mode: no, VIP count: 2, VIP: gec80::13:1:1:99,
gec0::13:1:1:99
Advertisement timer: 0.327s, Master router: gec80::13:1:1:1
Virtual router uptime: 00:03:47, Master router uptime: 00:03:41
Virtual MAC: 00:00:5e:00:02:01
Tracking: disabled

```

### show vrrp detail (Route Track)

```

user@host> show vrrp detail
Physical interface: ge-1/1/0, Unit: 0, Address: 30.30.30.30/24
Index: 67, SNMP ifIndex: 379, VRRP-Traps: enabled
Interface state: up, Group: 100, State: master
Priority: 150, Advertisement interval: 1, Authentication type: none
Preempt: yes, Accept-data mode: no, VIP count: 1, VIP: 30.30.30.100
Advertisement timer: 1.218s, Master router: 30.30.30.30
Virtual router uptime: 00:04:28, Master router uptime: 00:00:13
Virtual MAC: 00:00:5e:00:01:64
Tracking: enabled
Current priority: 150, Configured priority: 150
Priority hold-time: disabled
Interface tracking: disabled
Route tracking: enabled, Route count: 1

```



Route	VRF name	Route state	Priority cost
192.168.40.0/22	default	up	30

**show vrrp extensive**

```

user@host> show vrrp extensive
Interface: ge-0/0/0.121, Interface index: 67, Groups: 1, Active : 1
  Interface VRRP PDU statistics
    Advertisement sent           : 188
    Advertisement received       : 0
    Packets received             : 0
    No group match received      : 0
  Interface VRRP PDU error statistics
    Invalid IPAH next type received : 0
    Invalid VRRP TTL value received : 0
    Invalid VRRP version received  : 0
    Invalid VRRP PDU type received  : 0
    Invalid VRRP authentication type received: 0
    Invalid VRRP IP count received : 0
    Invalid VRRP checksum received  : 0

Physical interface: ge-0/0/0, Unit: 121, Vlan-id: 212, Address: gec0::12:1:1:120

Index: 67, SNMP ifIndex: 45, VRRP-Traps: enabled
Interface state: up, Group: 1, State: master
Priority: 200, Advertisement interval: 1, Authentication type: none
Preempt: yes, Accept-data mode: no, VIP count: 2, VIP: ge80::12:1:1:99,
gec0::12:1:1:99
Advertisement timer: 1.034s, Master router: ge80::12:1:1:1
Virtual router uptime: 00:04:04, Master router uptime: 00:03:58
Virtual MAC: 00:00:5e:00:02:01
Tracking: disabled
Group VRRP PDU statistics
  Advertisement sent           : 188
  Advertisement received       : 0
Group VRRP PDU error statistics
  Bad authentication type received: 0
  Bad password received           : 0
  Bad MD5 digest received         : 0
  Bad advertisement timer received: 0
  Bad VIP count received          : 0
  Bad VIPADDR received           : 0
Group state transition statistics
  Idle to master transitions      : 0
  Idle to backup transitions      : 1
  Backup to master transitions    : 1
  Master to backup transitions    : 0

Interface: ge-0/0/2.131, Interface index: 69, Groups: 1, Active : 1
  Interface VRRP PDU statistics
    Advertisement sent           : 186
    Advertisement received       : 0
    Packets received             : 0
    No group match received      : 0
  Interface VRRP PDU error statistics
    Invalid IPAH next type received : 0
    Invalid VRRP TTL value received : 0
    Invalid VRRP version received  : 0
    Invalid VRRP PDU type received  : 0
    Invalid VRRP authentication type received: 0
    Invalid VRRP IP count received : 0
    Invalid VRRP checksum received  : 0

```



Physical interface: ge-0/0/2, Unit: 131, Vlan-id: 213, Address: gec0::13:1:1:1/120

```

Index: 69, SNMP ifIndex: 47, VRRP-Traps: enabled
Interface state: up, Group: 1, State: master
Priority: 200, Advertisement interval: 1, Authentication type: none
Preempt: yes, Accept-data mode: no, VIP count: 2, VIP: ge80::13:1:1:99,
gec0::13:1:1:99
Advertisement timer: 0.396s, Master router: ge80::13:1:1:1
Virtual router uptime: 00:04:04, Master router uptime: 00:03:58
Virtual MAC: 00:00:5e:00:02:01
Tracking: disabled
Group VRRP PDU statistics
  Advertisement sent           :          186
  Advertisement received       :           0
Group VRRP PDU error statistics
  Bad authentication type received:          0
  Bad password received         :           0
  Bad MD5 digest received       :           0
  Bad advertisement timer received:          0
  Bad VIP count received        :           0
  Bad VIPADDR received         :           0
Group state transition statistics
  Idle to master transitions     :           0
  Idle to backup transitions     :           1
  Backup to master transitions   :           1
  Master to backup transitions   :           0

```

#### show vrrp interface

```

user@host> show vrrp interface
Interface: ge-0/0/0.121, Interface index: 67, Groups: 1, Active : 1
Interface VRRP PDU statistics
  Advertisement sent           :          205
  Advertisement received       :           0
  Packets received             :           0
  No group match received      :           0
Interface VRRP PDU error statistics
  Invalid IPAH next type received:          0
  Invalid VRRP TTL value received:          0
  Invalid VRRP version received:          0
  Invalid VRRP PDU type received:          0
  Invalid VRRP authentication type received: 0
  Invalid VRRP IP count received:          0
  Invalid VRRP checksum received:          0

```

Physical interface: ge-0/0/0, Unit: 121, Vlan-id: 212, Address: gec0::12:1:1:1/120

```

Index: 67, SNMP ifIndex: 45, VRRP-Traps: enabled
Interface state: up, Group: 1, State: master
Priority: 200, Advertisement interval: 1, Authentication type: none
Preempt: yes, Accept-data mode: no, VIP count: 2, VIP: ge80::12:1:1:99,
gec0::12:1:1:99
Advertisement timer: 0.789s, Master router: ge80::12:1:1:1
Virtual router uptime: 00:04:26, Master router uptime: 00:04:20
Virtual MAC: 00:00:5e:00:02:01
Tracking: disabled
Group VRRP PDU statistics
  Advertisement sent           :          205
  Advertisement received       :           0
Group VRRP PDU error statistics
  Bad authentication type received:          0
  Bad password received         :           0
  Bad MD5 digest received       :           0

```



```

      Bad advertisement timer received:      0
      Bad VIP count received      :      0
      Bad VIPADDR received      :      0
Group state transition statistics
      Idle to master transitions      :      0
      Idle to backup transitions      :      1
      Backup to master transitions      :      1
      Master to backup transitions      :      0

```

**show vrrp summary**

```

user@host> show vrrp summary
Interface      State      Group  VR state  Type  Address
ge-4/1/0.0    up         1      backup   lcl   10.57.0.2
              vip      10.57.0.100

```

**show vrrp track detail**

```

user@host> show vrrp track detail
Tracked interface: ae1.211
State: up, Speed: 400m
Incurred priority cost: 0
Threshold  Priority cost  Active
400m      10
300m      60
200m      110
100m      160
down      190
Tracking VRRP interface: ae0.210, Group: 1
VR State: master
Current priority: 200, Configured priority: 200
Priority hold-time: disabled, Remaining-time: 50.351

```

**show vrrp track summary**

```

user@host> show vrrp track summary
Track if      State  Speed  VRRP if  Group  VR State  Current priority
ae1.211       up     400m   ae0.210  1      master    200

```







## CHAPTER 22

# Troubleshooting

- [Troubleshooting Procedures on page 1907](#)

## Troubleshooting Procedures

---

- [Troubleshooting VRRP on page 1907](#)

## Troubleshooting VRRP

**Problem** If you configure multiple VRRP groups on an interface (using multiple VLANs), traffic for some of the groups might be briefly dropped if a failover occurs. This can happen because the new master must send gratuitous ARP replies for each VRRP group to update the ARP tables in the connected devices, and there is a short delay between each gratuitous ARP reply. Traffic sent by devices that have not yet received the gratuitous ARP reply is dropped (until the device receives the reply and learns the MAC address of the new master).

**Solution** Configure a failover delay so that the new master delays sending gratuitous ARP replies for the period that you set. This allows the new master to send the ARP replies for all of the VRRP groups simultaneously.

**Related Documentation** • [failover-delay on page 1822](#)







## PART 8

# Interfaces

- [Overview on page 1911](#)
- [Configuration on page 1945](#)
- [Administration on page 2121](#)
- [Troubleshooting on page 2311](#)







## CHAPTER 23

# Overview

- [Interfaces Overview on page 1911](#)

## Interfaces Overview

---

- [Interfaces Overview on page 1911](#)
- [Understanding Aggregated Ethernet Interfaces and LACP on page 1913](#)
- [Understanding Interface Naming Conventions on page 1915](#)
- [Understanding Interface Ranges on the QFX Series on page 1928](#)
- [Understanding Layer 3 Logical Interfaces on page 1930](#)
- [Understanding Management Interfaces on page 1930](#)
- [Understanding Multichassis Link Aggregation on page 1931](#)
- [Overview of Uplink Failure Detection on page 1941](#)

## Interfaces Overview

Juniper Networks QFX Series products have two types of interfaces: network interfaces and special interfaces. This topic provides brief information about these interfaces. For additional information, see the Junos® OS Network Interfaces.

- [Network Interfaces on page 1911](#)
- [Special Interfaces on page 1912](#)

## Network Interfaces

---

Network interfaces connect to the network and carry network traffic. [Table 146 on page 1911](#) lists the types of network interfaces supported on the QFX Series.

**Table 146: Network Interface Types and Purposes**

Type	Purpose
Aggregated Ethernet interfaces	You can group Ethernet interfaces at the physical layer to form a single link-layer interface, also known as a <i>link aggregation group (LAG)</i> or <i>bundle</i> . These aggregated Ethernet interfaces help to balance traffic and increase the uplink bandwidth.



Table 146: Network Interface Types and Purposes (*continued*)

Type	Purpose
Fibre Channel interfaces	You can use Fibre Channel interfaces to connect the switch to a Fibre Channel over Ethernet (FCoE) forwarder or a Fibre Channel switch in a storage area network (SAN). You can configure Fibre Channel interfaces only on ports 0 through 5 and 42 through 47 on QFX3500 devices. Fibre Channel interfaces do not forward Ethernet traffic.
LAN access interfaces	You can use these interfaces to connect to other servers, storage, and switches. When you power on a QFX Series product and use the factory-default configuration, the software automatically configures interfaces in access mode for each of the network ports.
Multichassis aggregated Ethernet (MC-AE) interfaces	You can group a LAG on one QFX3500 standalone switch with a LAG on another QFX3500 standalone switch to create a MC-AE. The MC-AE provides load balancing and redundancy across the two QFX3500 standalone switches.
Tagged-access mode interfaces	You can use tagged-access interfaces to connect a switch to an access layer device. Tagged-access interfaces can accept VLAN-tagged packets from multiple VLANs.
Trunk interfaces	You can use trunk interfaces to connect to other switches or routers. To use a port for this type of connection, you must explicitly configure the port interface for trunk mode. The interfaces from the switches or routers must also be configured for trunk mode. In this mode, the interface can be in multiple VLANs and accept tagged packets from multiple devices. Trunk interfaces typically connect to other switches and to routers on the LAN.

### Special Interfaces

Table 147 on page 1912 lists the types of special interfaces supported on the QFX Series.

Table 147: Special Interface Types and Purposes

Type	Purpose
Console port	Each QFX Series product has a serial port, labeled <b>CON</b> or <b>CONSOLE</b> , for connecting tty-type terminals to the switch using standard PC-type tty cables. The console port does not have a physical address or IP address associated with it. However, it is an interface in the sense that it provides access to the switch.
Ethernet Interfaces	You can configure Gigabit Ethernet, 10-Gigabit Ethernet, 40-Gigabit Ethernet interfaces to connect to other servers, storage, and switches. You can configure 40-Gigabit data plane uplink ports to connect a Node device to an Interconnect device.
Loopback interface	All QFX Series products have this software-only virtual interface that is always up. The loopback interface provides a stable and consistent interface and IP address on the switch.
Management interface	The Juniper Networks Junos OS for the QFX Series includes management Ethernet interfaces. The management Ethernet interface provides an out-of-band method for connecting to a standalone switch and QFabric system.
Routed VLAN interface (RVI)	<p>QFX Series products use a Layer 3 routed VLAN interface (RVI) named <b>vlan</b> to route traffic from one broadcast domain to another and to perform other Layer 3 functions such as traffic engineering. These functions are typically performed by a router interface in a traditional network.</p> <p>The RVI functions as a logical router, eliminating the need for having both a switch and a router. The RVI (the <b>vlan</b> interface) must be configured as part of a broadcast domain or virtual private LAN service (VPLS) routing instance for Layer 3 traffic to be routed out of it.</p>



- Related Documentation**
- [Understanding Aggregated Ethernet Interfaces and LACP on page 1913](#)
  - [Understanding Interface Naming Conventions on page 1915](#)
  - [Understanding Layer 3 Logical Interfaces on page 1930](#)
  - [Understanding Management Interfaces on page 1930](#)
  - [Understanding Routed VLAN Interfaces on page 1386](#)
  - [Overview of Fibre Channel on the QFX Series on page 4380](#)

## Understanding Aggregated Ethernet Interfaces and LACP

IEEE 802.3ad link aggregation enables you to group Ethernet interfaces to form a single, aggregated Ethernet interface, also known as a *link aggregation group (LAG)* or *bundle*.

Link aggregation is used to aggregate Ethernet interfaces between two devices. You can create a LAG between a QFX Series product and a router, switch, aggregation switch, server, or other devices. The aggregated Ethernet interfaces that participate in a LAG are called member links. Because a LAG is composed of multiple member links, even if one member link fails, the LAG continues to carry traffic over the remaining links.

Link Aggregation Control Protocol (LACP) is a subcomponent of the IEEE 802.3ad standard and is used as a discovery protocol.

- [Link Aggregation Group on page 1913](#)
- [Link Aggregation Control Protocol \(LACP\) on page 1914](#)

### Link Aggregation Group

---

To create a LAG:

1. Create a logical aggregated Ethernet interface.
2. Define the parameters associated with the logical aggregated Ethernet interface, such as a logical unit, interface properties, and Link Aggregation Control Protocol (LACP).
3. Define the member links to be contained within the aggregated Ethernet interface—for example, two 10-Gigabit Ethernet interfaces.
4. Configure LACP for link detection.

Keep in mind these hardware and software guidelines:



- Up to 32 Ethernet interfaces can be grouped to form a LAG on a QFX3500 switch, a redundant server Node group, a server Node group, and a network Node group on a QFabric system.



**NOTE:** If you try to commit a configuration containing more than 32 Ethernet interfaces in a LAG, you will receive an error message saying that the group limit of 32 has been exceeded, and the configuration checkout has failed.

- Up to 63 LAGs are supported on a QFX3500 switch.
- Up to 48 LAGs are supported on redundant server Node groups and server Node groups on a QFabric system, and up to 128 LAGs are supported on network Node groups on a QFabric system. You can configure LAGs across Node devices in redundant server Node groups, server Node groups, and network Node groups.
- The LAG must be configured on both sides of the link.
- The interfaces on either side of the link must be set to the same speed and be in full-duplex mode.



**NOTE:** Junos OS for the QFX Series assigns a unique ID and port priority to each port. The ID and priority are not configurable.

---

### Link Aggregation Control Protocol (LACP)

---

LACP is one method of bundling several physical interfaces to form one logical aggregated Ethernet interface. The LACP mode can be active or passive. The transmitting link is known as the *actor*, and the receiving link is known as the *partner*. If the actor and partner are both in passive mode, they do not exchange LACP packets, and the aggregated Ethernet links do not come up. If either the actor or partner is active, they do exchange LACP packets. By default, LACP is in passive mode on aggregated Ethernet interfaces. To initiate transmission of LACP packets and response to LACP packets, you must enable LACP active mode. You can configure Ethernet links to actively transmit protocol data units (PDUs), or you can configure the links to passively transmit them, sending out LACP PDUs only when they receive them from another link. You can configure both VLAN-tagged and untagged aggregated Ethernet interfaces without LACP enabled. LACP is defined in IEEE 802.3ad, *Aggregation of Multiple Link Segments*.

LACP was designed to achieve the following:

- Automatic addition and deletion of individual links to the LAG without user intervention.
- Link monitoring to check whether both ends of the bundle are connected to the correct group.

When a dual-homed server is deployed with a switch, the network interface cards form a LAG with the switch. During a server upgrade, the server may not be able to exchange LACP PDUs. In such a situation you can configure an interface to be in the **up** state even if no PDUs are exchanged. Use the **force-up** statement to configure an interface when



the peer has limited LACP capability. The interface selects the associated LAG by default, whether the switch and peer are both in active or passive mode. When there are no received PDUs, the partner is considered to be working in the passive mode. Therefore, LACP PDU transmissions are controlled by the transmitting link.

If the remote end of the LAG link is a security device, LACP might not be supported because security devices require a deterministic configuration. In this case, do not configure LACP. All links in the LAG are permanently operational unless the switch detects a link failure within the Ethernet physical layer or data link layers.

#### Related Documentation

- [Configuring Link Aggregation on page 2033](#)
- [Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch on page 1950](#)
- [Verifying the Status of a LAG Interface on page 2124](#)
- Junos® OS Network Interfaces

## Understanding Interface Naming Conventions

The QFX Series use a naming convention for defining the interfaces that is similar to that of other platforms running under Juniper Networks Junos OS. This topic provides brief information about the naming conventions used for interfaces on the QFX Series.

This topic describes:

- [Physical Part of an Interface Name on page 1915](#)
- [Logical Part of an Interface Name on page 1927](#)
- [Wildcard Characters in Interface Names on page 1928](#)

### Physical Part of an Interface Name

Interfaces in Junos OS are specified as follows:

*device-name:type-fpc/pic/port*

QFX Series products apply this convention as follows:

- *device-name*—(QFabric systems only) The *device-name* is either the serial number or the alias of the QFabric system component, such as a Node device, Interconnect device, or QFabric infrastructure. The name can contain a maximum of 128 characters and cannot contain any colons.
- *type*—The QFX Series interfaces use the following media types:
  - **fc**—Fibre Channel interface
  - **ge**—Gigabit Ethernet interface
  - **xe**—10-Gigabit Ethernet interface
  - **xle**—40-Gigabit Ethernet interface



- **fte**—40-Gigabit data plane uplink interface
- **me**—Management interface
- **fpc**—Flexible PIC Concentrator. QFX Series interfaces use the following convention for the FPC number in interface names:
  - On QFX3500 and QFX3600 devices, the FPC number is always 0.
  - The FPC number indicates the slot number of the line card that contains the physical interface.
- **pic**—QFX Series interfaces use the following convention for the PIC (Physical Interface Card) number in interface names:
  - On a QFX3500 standalone switch, PIC 0 can support up to 48 ports, PIC 1 can support up to 15 10-Gigabit Ethernet ports, and PIC 2 can support up to 4 40-Gigabit Ethernet ports.
  - On a QFX3500 Node device, PIC 0 can support up to 48 ports and PIC 1 can support up to four 40-Gigabit data plane uplink ports.
  - On a QFX3600 Node device, PIC 0 can support up to 56 10-Gigabit Ethernet ports, and PIC 1 can support up to 8 40-Gigabit data plane uplink ports and up to 14 40-Gigabit Ethernet ports.
  - On a QFX3600 standalone switch, PIC 0 can support up to 63 10-Gigabit Ethernet ports, and PIC 1 can support up to 16 40-Gigabit Ethernet ports.
- **port**—QFX Series interfaces use the following convention for port numbers:
  - The QFX3500 device has 48 network access ports labeled 0 through 47 on PIC 0.
  - The QFX3500 device has 15 network access ports labeled 1 through 15 on PIC 1.
  - The QFX3500 device has four 40-Gbps QSFP+ ports labeled Q0 through Q3 on PIC 2.
    - On a QFX3500 Node device, you can use the QSFP+ ports to connect the Node device to Interconnect devices.
    - On a QFX3500 standalone switch, by default, the 40-Gbps QSFP+ ports are configured to operate as 10-Gigabit Ethernet ports. You can use QSFP+ to four SFP+ copper breakout cables to connect the 10-Gigabit Ethernet ports to other servers, storage, and switches. Optionally, you can choose to configure the QSFP+ ports as 40-Gigabit Ethernet ports (see [“Configuring the QSFP+ Port Type on QFX3500 Standalone Switches” on page 2039](#)).
  - The QFX3600 device has 16 40-Gbps QSFP+ ports labeled Q0 through Q15.
    - On a QFX3600 Node device, by default, four 40-Gbps QSFP+ ports (labeled Q0 through Q3) are configured for uplink connections between your Node device and your Interconnect devices, and twelve 40-Gbps QSFP+ ports (labeled Q4 through Q15) use QSFP+ to four SFP+ copper breakout cables to support up to 48 10-Gigabit Ethernet ports for connections to either endpoint systems (such as servers and storage devices) or external networks. Optionally, you can choose to configure the first eight ports (Q0 through Q7) for uplink connections between



your Node device and your Interconnect devices, and ports Q2 through Q15 for 10-Gigabit Ethernet or 40-Gigabit Ethernet connections to either endpoint systems or external networks (see [Configuring the Port Type on QFX3600 Node Devices](#)).

- On a QFX3600 standalone switch, by default, all the QSFP+ ports are configured to operate as 40-Gigabit Ethernet ports. Optionally, you can choose to configure the QSFP+ ports as 10-Gigabit Ethernet ports (see [“Configuring the Port Type on QFX3600 Standalone Switches” on page 2041](#)) and use QSFP+ to four SFP+ copper breakout cables to connect the 10-Gigabit Ethernet ports to other servers, storage, and switches.



**NOTE:** Port Q0 supports only three (not the typical four) 10-Gigabit Ethernet ports. Therefore, you can configure up to 63 (not 64) 10-Gigabit Ethernet ports on ports Q0 through Q15.

*port ranges*— QFX Series devices can have different port ranges depending on the media type of the interface.

- On a QFX3500 device (see [Table 148 on page 1918](#) for physical port to logical port mappings):
  - The valid port range for a Fibre Channel (fc) interface is **0** through **5** and **42** through **47** on PIC **0**, with a total of 12 available Fibre Channel ports.
  - The valid port range for a Gigabit Ethernet (ge) interface is **6** through **41** on PIC **0** because the ports between **0** and **5** and **42** and **47** are reserved as Fibre Channel ports. The total number of available Gigabit Ethernet ports is 36, because 12 of the remaining 48 ports are reserved for Fibre Channel and 10-Gigabit Ethernet interfaces. Fibre Channel ports cannot be configured as Gigabit Ethernet ports.
  - The valid port range for a 10-Gigabit Ethernet (xe) interface is **0** through **47** on PIC **0**. The valid port range for a 10-Gigabit Ethernet (xe) interface is **1** through **15** on PIC **1**. The total number of available 10-Gigabit Ethernet ports is 63.



**NOTE:** This port range is available on a QFX3500 standalone switch only.

- The valid port range for a 40-Gigabit Ethernet (xle) interface is **0** through **3** on PIC **2**. There are four available ports.



**NOTE:** This port range is available on a QFX3500 standalone switch only.

- On a QFX3600 standalone switch (see [Table 149 on page 1922](#) for physical port to logical port mappings):
  - The valid port range for a 10-Gigabit Ethernet (xe) interface is **1** through **63** on PIC **0**. There are 63 available ports.



- The valid port range for a 40-Gigabit Ethernet (**xle**) interface is **0** through **15** on PIC 1. There are 16 available ports.
- On a QFX3600 Node device (see [Table 150 on page 1925](#) for physical port to logical port mappings):
  - The valid port range for a 10-Gigabit Ethernet (**xe**) interface is **8** through **63** on PIC **0**. There are 56 available ports.
  - The valid port range for a 40-Gigabit Ethernet (**xle**) interface is **2** through **15** on PIC 1. There are 14 available ports.
  - The valid port range for a 40-Gigabit data plane uplink (**fte**) interface is **0** through **7** on PIC 1. There are eight available ports.
- The valid port range for a management interface (**me**) is 0 through 6, with a total of seven available ports. However, you can only configure me0 and me1.
- On the QFX3500 standalone switch and QFX3500 Node device, the management interfaces are labeled **C0** and **C1**, and they correspond to me0 and me1.
- On the QFX3600 device, there are two RJ-45 management interfaces (labeled **C0** and **C1**) and two SFP management interfaces (labeled **C0S** and **C1S**), and they correspond to me0 and me1.



**NOTE:** On a QFX3600 device, you can use either the RJ-45 or the SFP management ports, but not both at the same time.

**Table 148: Valid Port Ranges on QFX3500 Devices**

Port Number	Fibre Channel Interfaces (On PIC 0)	Gigabit Ethernet Interfaces (On PIC 0)	10-Gigabit Ethernet Interfaces (On PIC 0 and 1)	40-Gigabit Ethernet Interfaces (On PIC 2)
0	fc-0/0/0	Not supported on this port	xe-0/0/0	Not supported on this port
1	fc-0/0/1	Not supported on this port	xe-0/0/1	Not supported on this port
2	fc-0/0/2	Not supported on this port	xe-0/0/2	Not supported on this port
3	fc-0/0/3	Not supported on this port	xe-0/0/3	Not supported on this port
4	fc-0/0/4	Not supported on this port	xe-0/0/4	Not supported on this port
5	fc-0/0/5	Not supported on this port	xe-0/0/5	Not supported on this port



Table 148: Valid Port Ranges on QFX3500 Devices (*continued*)

Port Number	Fibre Channel Interfaces (On PIC 0)	Gigabit Ethernet Interfaces (On PIC 0)	10-Gigabit Ethernet Interfaces (On PIC 0 and 1)	40-Gigabit Ethernet Interfaces (On PIC 2)
6	Not supported on this port	ge-0/0/6	xe-0/0/6	Not supported on this port
7	Not supported on this port	ge-0/0/7	xe-0/0/7	Not supported on this port
8	Not supported on this port	ge-0/0/8	xe-0/0/8	Not supported on this port
9	Not supported on this port	ge-0/0/9	xe-0/0/9	Not supported on this port
10	Not supported on this port	ge-0/0/10	xe-0/0/10	Not supported on this port
11	Not supported on this port	ge-0/0/11	xe-0/0/11	Not supported on this port
12	Not supported on this port	ge-0/0/12	xe-0/0/12	Not supported on this port
13	Not supported on this port	ge-0/0/13	xe-0/0/13	Not supported on this port
14	Not supported on this port	ge-0/0/14	xe-0/0/14	Not supported on this port
15	Not supported on this port	ge-0/0/15	xe-0/0/15	Not supported on this port
16	Not supported on this port	ge-0/0/16	xe-0/0/16	Not supported on this port
17	Not supported on this port	ge-0/0/17	xe-0/0/17	Not supported on this port
18	Not supported on this port	ge-0/0/18	xe-0/0/18	Not supported on this port
19	Not supported on this port	ge-0/0/19	xe-0/0/19	Not supported on this port
20	Not supported on this port	ge-0/0/20	xe-0/0/20	Not supported on this port
21	Not supported on this port	ge-0/0/21	xe-0/0/21	Not supported on this port



Table 148: Valid Port Ranges on QFX3500 Devices (*continued*)

Port Number	Fibre Channel Interfaces (On PIC 0)	Gigabit Ethernet Interfaces (On PIC 0)	10-Gigabit Ethernet Interfaces (On PIC 0 and 1)	40-Gigabit Ethernet Interfaces (On PIC 2)
22	Not supported on this port	ge-0/0/22	xe-0/0/22	Not supported on this port
23	Not supported on this port	ge-0/0/23	xe-0/0/23	Not supported on this port
24	Not supported on this port	ge-0/0/24	xe-0/0/24	Not supported on this port
25	Not supported on this port	ge-0/0/25	xe-0/0/25	Not supported on this port
26	Not supported on this port	ge-0/0/26	xe-0/0/26	Not supported on this port
27	Not supported on this port	ge-0/0/27	xe-0/0/27	Not supported on this port
28	Not supported on this port	ge-0/0/28	xe-0/0/28	Not supported on this port
29	Not supported on this port	ge-0/0/29	xe-0/0/29	Not supported on this port
30	Not supported on this port	ge-0/0/30	xe-0/0/30	Not supported on this port
31	Not supported on this port	ge-0/0/31	xe-0/0/31	Not supported on this port
32	Not supported on this port	ge-0/0/32	xe-0/0/32	Not supported on this port
33	Not supported on this port	ge-0/0/33	xe-0/0/33	Not supported on this port
34	Not supported on this port	ge-0/0/34	xe-0/0/34	Not supported on this port
35	Not supported on this port	ge-0/0/35	xe-0/0/35	Not supported on this port
36	Not supported on this port	ge-0/0/36	xe-0/0/36	Not supported on this port
37	Not supported on this port	ge-0/0/37	xe-0/0/37	Not supported on this port



Table 148: Valid Port Ranges on QFX3500 Devices (*continued*)

Port Number	Fibre Channel Interfaces (On PIC 0)	Gigabit Ethernet Interfaces (On PIC 0)	10-Gigabit Ethernet Interfaces (On PIC 0 and 1)	40-Gigabit Ethernet Interfaces (On PIC 2)
38	Not supported on this port	ge-0/0/38	xe-0/0/38	Not supported on this port
39	Not supported on this port	ge-0/0/39	xe-0/0/39	Not supported on this port
40	Not supported on this port	ge-0/0/40	xe-0/0/40	Not supported on this port
41	Not supported on this port	ge-0/0/41	xe-0/0/41	Not supported on this port
42	fc-0/0/42	Not supported on this port	xe-0/0/42	Not supported on this port
43	fc-0/0/43	Not supported on this port	xe-0/0/43	Not supported on this port
44	fc-0/0/44	Not supported on this port	xe-0/0/44	Not supported on this port
45	fc-0/0/45	Not supported on this port	xe-0/0/45	Not supported on this port
46	fc-0/0/46	Not supported on this port	xe-0/0/46	Not supported on this port
47	fc-0/0/47	Not supported on this port	xe-0/0/47	Not supported on this port
Q0	Not supported on this port	Not supported on this port	xe-0/1/1 xe-0/1/2 xe-0/1/3  <i>NOTE:</i> Supported on QFX3500 standalone switch only.	xle-0/2/0  <i>NOTE:</i> Supported on QFX3500 standalone switch only.



Table 148: Valid Port Ranges on QFX3500 Devices (*continued*)

Port Number	Fibre Channel Interfaces (On PIC 0)	Gigabit Ethernet Interfaces (On PIC 0)	10-Gigabit Ethernet Interfaces (On PIC 0 and 1)	40-Gigabit Ethernet Interfaces (On PIC 2)
Q1	Not supported on this port	Not supported on this port	xe-0/1/4 xe-0/1/5 xe-0/1/6 xe-0/1/7  NOTE: Supported on QFX3500 standalone switch only.	xle-0/2/1  NOTE: Supported on QFX3500 standalone switch only.
Q2	Not supported on this port	Not supported on this port	xe-0/1/8 xe-0/1/9 xe-0/1/10 xe-0/1/11  NOTE: Supported on QFX3500 standalone switch only.	xle-0/2/2  NOTE: Supported on QFX3500 standalone switch only.
Q3	Not supported on this port	Not supported on this port	xe-0/1/12 xe-0/1/13 xe-0/1/14 xe-0/1/15  NOTE: Supported on QFX3500 standalone switch only.	xle-0/2/3  NOTE: Supported on QFX3500 standalone switch only.

Table 149: Valid Port Ranges on QFX3600 Standalone Switches

Port Number	10-Gigabit Ethernet Interfaces (On PIC 0)	40-Gigabit Ethernet Interfaces (On PIC 1)
Q0	xe-0/0/1 xe-0/0/2 xe-0/0/3	xle-0/1/0



Table 149: Valid Port Ranges on QFX3600 Standalone Switches (*continued*)

Port Number	10-Gigabit Ethernet Interfaces (On PIC 0)	40-Gigabit Ethernet Interfaces (On PIC 1)
Q1	xe-0/0/4	xle-0/1/1
	xe-0/0/5	
	xe-0/0/6	
	xe-0/0/7	
Q2	xe-0/0/8	xle-0/1/2
	xe-0/0/9	
	xe-0/0/10	
	xe-0/0/11	
Q3	xe-0/0/12	xle-0/1/3
	xe-0/0/13	
	xe-0/0/14	
	xe-0/0/15	
Q4	xe-0/0/16	xle-0/1/4
	xe-0/0/17	
	xe-0/0/18	
	xe-0/0/19	
Q5	xe-0/0/20	xle-0/1/5
	xe-0/0/21	
	xe-0/0/22	
	xe-0/0/23	
Q6	xe-0/0/24	xle-0/1/6
	xe-0/0/25	
	xe-0/0/26	
	xe-0/0/27	



Table 149: Valid Port Ranges on QFX3600 Standalone Switches (*continued*)

Port Number	10-Gigabit Ethernet Interfaces (On PIC 0)	40-Gigabit Ethernet Interfaces (On PIC 1)
Q7	xe-0/0/28 xe-0/0/29 xe-0/0/30 xe-0/0/31	xle-0/1/7
Q8	xe-0/0/32 xe-0/0/33 xe-0/0/34 xe-0/0/35	xle-0/1/8
Q9	xe-0/0/36 xe-0/0/37 xe-0/0/38 xe-0/0/39	xle-0/1/9
Q10	xe-0/0/40 xe-0/0/41 xe-0/0/42 xe-0/0/43	xle-0/1/10
Q11	xe-0/0/44 xe-0/0/45 xe-0/0/46 xe-0/0/47	xle-0/1/11
Q12	xe-0/0/48 xe-0/0/49 xe-0/0/50 xe-0/0/51	xle-0/1/12



Table 149: Valid Port Ranges on QFX3600 Standalone Switches (*continued*)

Port Number	10-Gigabit Ethernet Interfaces (On PIC 0)	40-Gigabit Ethernet Interfaces (On PIC 1)
Q13	xe-0/0/52	xle-0/1/13
	xe-0/0/53	
	xe-0/0/54	
	xe-0/0/55	
Q14	xe-0/0/56	xle-0/1/14
	xe-0/0/57	
	xe-0/0/58	
	xe-0/0/59	
Q15	xe-0/0/60	xle-0/1/15
	xe-0/0/61	
	xe-0/0/62	
	xe-0/0/63	

Table 150: Valid Port Ranges on QFX3600 Node Devices

Port Number	10-Gigabit Ethernet Interfaces (On PIC 0)	40-Gigabit Data Plane Uplink Interfaces (On PIC 1)	40-Gigabit Ethernet Interfaces (On PIC 1)
Q0	Not supported on this port	fte-0/1/0	Not supported on this port
Q1	Not supported on this port	fte-0/1/1	Not supported on this port
Q2	xe-0/0/8	fte-0/1/2	xle-0/1/2
	xe-0/0/9		
	xe-0/0/10		
	xe-0/0/11		
Q3	xe-0/0/12	fte-0/1/3	xle-0/1/3
	xe-0/0/13		
	xe-0/0/14		
	xe-0/0/15		



Table 150: Valid Port Ranges on QFX3600 Node Devices (*continued*)

Port Number	10-Gigabit Ethernet Interfaces (On PIC 0)	40-Gigabit Data Plane Uplink Interfaces (On PIC 1)	40-Gigabit Ethernet Interfaces (On PIC 1)
Q4	xe-0/0/16	fte-0/1/4	xle-0/1/4
	xe-0/0/17		
	xe-0/0/18		
	xe-0/0/19		
Q5	xe-0/0/20	fte-0/1/5	xle-0/1/5
	xe-0/0/21		
	xe-0/0/22		
	xe-0/0/23		
Q6	xe-0/0/24	fte-0/1/6	xle-0/1/6
	xe-0/0/25		
	xe-0/0/26		
	xe-0/0/27		
Q7	xe-0/0/28	fte-0/1/7	xle-0/1/7
	xe-0/0/29		
	xe-0/0/30		
	xe-0/0/31		
Q8	xe-0/0/32	Not supported on this port	xle-0/1/8
	xe-0/0/33		
	xe-0/0/34		
	xe-0/0/35		
Q9	xe-0/0/36	Not supported on this port	xle-0/1/9
	xe-0/0/37		
	xe-0/0/38		
	xe-0/0/39		



Table 150: Valid Port Ranges on QFX3600 Node Devices (*continued*)

Port Number	10-Gigabit Ethernet Interfaces (On PIC 0)	40-Gigabit Data Plane Uplink Interfaces (On PIC 1)	40-Gigabit Ethernet Interfaces (On PIC 1)
Q10	xe-0/0/40	Not supported on this port	xle-0/1/10
	xe-0/0/41		
	xe-0/0/42		
	xe-0/0/43		
Q11	xe-0/0/44	Not supported on this port	xle-0/1/11
	xe-0/0/45		
	xe-0/0/46		
	xe-0/0/47		
Q12	xe-0/0/48	Not supported on this port	xle-0/1/12
	xe-0/0/49		
	xe-0/0/50		
	xe-0/0/51		
Q13	xe-0/0/52	Not supported on this port	xle-0/1/13
	xe-0/0/53		
	xe-0/0/54		
	xe-0/0/55		
Q14	xe-0/0/56	Not supported on this port	xle-0/1/14
	xe-0/0/57		
	xe-0/0/58		
	xe-0/0/59		
Q15	xe-0/0/60	Not supported on this port	xle-0/1/15
	xe-0/0/61		
	xe-0/0/62		
	xe-0/0/63		

### Logical Part of an Interface Name

The logical unit part of the interface name corresponds to the logical unit number, which can be a number from 0 through 16384. In the virtual part of the name, a period (.)



separates the port and logical unit numbers: *device-name* (QFabric systems only):*type-fpc/pic/port.logical-unit-number*. For example, if you issue the **show ethernet-switching interfaces** command on a system with a default VLAN, the resulting display shows the logical interfaces associated with the VLAN:

Interface	State	VLAN members	Blocking
node-device1:xe-0/0/1.0	down	remote-analyzer	unblocked
node-device1:xe-0/0/2.0	down	default	unblocked
node-device1:xe-0/0/3.0	down	default	unblocked

When you configure aggregated Ethernet interfaces, you configure a logical interface, which is called a *bundle* or a LAG. Each LAG can include up to eight Ethernet interfaces, depending on the switch model.

### Wildcard Characters in Interface Names

In the **show interfaces** and **clear interfaces** commands, you can use wildcard characters in the *interface-name* option to specify groups of interface names without having to type each name individually. You must enclose all wildcard characters except the asterisk (\*) in quotation marks (" ").

#### Related Documentation

- [Interfaces Overview on page 1911](#)
- [Rear Panel of a QFX3500 Device](#)
- [Front Panel of a QFX3600 Device](#)
- [Junos® OS Network Interfaces](#)

## Understanding Interface Ranges on the QFX Series

You can use the interface ranges to group interfaces of the same type that share a common configuration profile. This helps reduce the time and effort in configuring interfaces on Juniper Networks QFX Series products. The configurations common to all the interfaces can be included in the interface range definition.

The interface range definition contains the name of the interface range defined, the names of the individual member interfaces that do not fall in a series of interfaces, a range of interfaces defined in the member range, and the configuration statements common to all the interfaces. An interface range defined with member ranges and individual members but without any common configurations is also a valid definition.



**NOTE:** The interface range definition is supported only for Gigabit Ethernet, 10-Gigabit Ethernet, and Fibre Channel interfaces.

The common configurations defined in the interface range will be overridden by the local configuration.

The defined interface ranges can be used at places where the **interface** statement is used in the following configuration hierarchies:



- ethernet-switching-options analyzer *name* input egress interface
- ethernet-switching-options analyzer *name* input ingress interface
- ethernet-switching-options analyzer output interface
- ethernet-switching-options bpdu-block interface
- ethernet-switching-options interfaces
- ethernet-switching-options redundant-trunk-group group-name interface
- ethernet-switching-options secure-access-port interface
- ethernet-switching-options voip interface
- protocols igmp-snooping vlan *vlan-name* interface
- protocols isis interface
- protocols link-management peer lmp-control-channel interface
- protocols link-management te-link *name* interface
- protocols lldp interface
- protocols mstp interface
- protocols mstp msti-*id* interface
- protocols mstp msti-*id* vlan *vlan-id* interface
- protocols sflow interfaces
- protocols stp interface
- protocols vstp vlan *vlan-id* interface
- vlans *vlan-name* interface

**Related  
Documentation**

- [Interfaces Overview on page 1911](#)
- [Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029](#)
- [Configuring Link Aggregation on page 2033](#)
- [Configuring a Layer 3 Logical Interface on page 2033](#)
- Junos® OS Network Interfaces
- [interface-range on page 2076](#)



## Understanding Layer 3 Logical Interfaces

A Layer 3 logical interface is a logical division of a physical interface that operates at the network level and therefore can receive and forward 802.1Q VLAN tags. You can use Layer 3 logical interfaces to route traffic among multiple VLANs along a single trunk line that connects a Juniper Networks QFX3500 Switch to a Layer 2 switch. Only one physical connection is required between the switches. You can also use Layer 3 logical interfaces to provide alternative gateway addresses for smart DHCP relay.

To create Layer 3 logical interfaces on a switch, enable VLAN tagging, partition the physical interface into logical partitions, and bind the VLAN ID to the logical interface.

We recommend that you use the VLAN ID as the logical interface number when you configure the logical interface. QFX Series systems support a maximum of 4089 VLANs, which includes the default VLAN. You can, however, assign a VLAN ID in the range of 1 to 4094, but five of these VLAN IDs are reserved for internal use.

VLAN tagging places the VLAN ID in the frame header, allowing each physical interface to handle multiple VLANs. Double-tagging, which is assigning more than one VLAN ID in the frame header, is not supported. When you configure multiple VLANs on an interface, you must also enable tagging on that interface. Junos OS on switches supports a subset of the 802.1Q standard for receiving and forwarding routed or bridged Ethernet frames with single VLAN tags and running Virtual Router Redundancy Protocol (VRRP) over 802.1Q-tagged interfaces.

### Related Documentation

- [Interfaces Overview on page 1911](#)
- [Configuring a Layer 3 Logical Interface on page 2033](#)
- [Configuring DHCP and BOOTP Relay on page 4331](#)
- [Junos® OS Network Interfaces](#)

## Understanding Management Interfaces

You use management interfaces to access devices remotely. Typically, a management interface is not connected to the in-band network, but is connected to a device in the internal network. Through a management interface, you can access the device over the network using utilities such as **ssh** and **telnet** and configure it from anywhere, regardless of its physical location. As a security feature, users cannot log in as **root** through a management interface. To access the device as **root**, you must use the console port.



**NOTE:** Juniper Networks does not support configuring two management interfaces in the same subnet.

---

Management interface port ranges vary based on device type:

- QFX3500 devices:



The valid port range for a management interface (**me**) on a QFX3500 device is between 0 and 6, with a total of seven available ports. However, you can only configure **me0** and **me1** as management interfaces. The management interfaces are labeled **C0** and **C1**, and they correspond to **me0** and **me1**.

- QFX3600 devices:

There are two RJ-45 management interfaces (labeled **C0** and **C1**) and two SFP management interfaces (labeled **C0S** and **C1S**). On a QFX3600 standalone switch, the RJ-45 management interfaces and SFP management interfaces correspond to **me5** and **me6**. On a QFX3600 Node device, the RJ-45 management interfaces and SFP management interfaces correspond to **me0** and **me1**.



**NOTE:** On a QFX3600 device, you can use either the RJ-45 or the SFP management interfaces, but not both at the same time.



**NOTE:** Before you can use the management interfaces on either the QFX3500 device or QFX3600 device, you must configure the logical interfaces with valid IP addresses. Juniper Networks does not support configuring two management interfaces in the same subnet.

- QFabric system:

On a QFabric system, there are management interfaces on the Node devices, Interconnect devices, and Director devices. However, you cannot access the management interfaces on the Node devices or Interconnect devices directly. You can only manage and configure these devices using the Director device. You can connect to the management interface over the network using utilities such as SSH.

**Related Documentation**

- [Interfaces Overview on page 1911](#)

## Understanding Multichassis Link Aggregation

Layer 2 networks are increasing in scale mainly because of technologies such as virtualization. Protocol and control mechanisms that limit the disastrous effects of a topology loop in the network are necessary. Spanning Tree Protocol (STP) is the primary solution to this problem because it provides a loop-free Layer 2 environment. STP has gone through a number of enhancements and extensions, and although it scales to very large network environments, it still only provides one active path from one device to another, regardless of how many actual connections might exist in the network. Although STP is a robust and scalable solution to redundancy in a Layer 2 network, the single logical link creates two problems: At least half of the available system bandwidth is off-limits to data traffic, and network topology changes occur. The Rapid Spanning Tree Protocol (RSTP) reduces the overhead of the rediscovery process and allows a Layer 2 network to reconverge faster, but the delay is still high.



Link aggregation (IEEE 802.3ad) solves some of these problems by enabling users to use more than one link connection between switches. All physical connections are considered one logical connection. The problem with standard link aggregation is that the connections are point to point.

Multichassis link aggregation groups (MC-LAGs) enable a client device to form a logical LAG interface between two MC-LAG peers (QFX3500 and QFX3600 devices). An MC-LAG provides redundancy and load balancing between the two MC-LAG peers, multihoming support, and a loop-free Layer 2 network without running the Spanning Tree Protocol (STP).

On one end of an MC-LAG, there is an MC-LAG client device, such as a server, that has one or more physical links in a link aggregation group (LAG). This client device does not need to have an MC-LAG configured. On the other side of the MC-LAG, there are two MC-LAG peers. Each of the MC-LAG peers has one or more physical links connected to a single client device.

The MC-LAG peers use Interchassis Control Protocol (ICCP) to exchange control information and coordinate with each other to ensure that data traffic is forwarded properly.

Link Aggregation Control Protocol (LACP) is a subcomponent of the IEEE 802.3ad standard. LACP is used to discover multiple links from a client device connected to an MC-LAG peer. LACP must be configured on all member links for an MC-LAG to work correctly.

See [Table 151 on page 1933](#) for information about ICCP failure scenarios.

The following sections provide an overview of the terms and features associated with MC-LAG:

- [Active-Active Mode on page 1933](#)
- [ICCP and ICL-PL on page 1933](#)
- [Failure Handling on page 1933](#)
- [Multichassis Link Protection on page 1934](#)
- [MC-LAG Packet Forwarding on page 1934](#)
- [Layer 3 Routing on page 1934](#)
- [Spanning Tree Protocol \(STP\) Guidelines on page 1935](#)
- [MC-LAG Upgrade Guidelines on page 1935](#)
- [Layer 2 Unicast Features Supported on page 1936](#)
- [Layer 2 Multicast Features Supported on page 1936](#)
- [IGMP Snooping on an Active-Active MC-LAG on page 1936](#)
- [Layer 3 Unicast Features Supported on page 1937](#)
- [VRRP Active-Standby Support on page 1937](#)
- [Routed VLAN Interface \(RVI\) MAC Address Synchronization on page 1938](#)
- [Address Resolution Protocol \(ARP\) on page 1938](#)



- [DHCP Relay with Option 82 on page 1938](#)
- [Private VLAN \(PVLAN\) on page 1939](#)
- [Layer 3 Multicast on page 1939](#)

### Active-Active Mode

In active-active mode, all member links are active on the MC-LAG. In this mode, MAC addresses learned on one MC-LAG peer are propagated to the other MC-LAG peer. Active-active mode is the only mode supported at this time.

### ICCP and ICL-PL

ICCP replicates control traffic and forwarding states across the MC-LAG peers and communicates the operational state of the MC-LAG members. Because ICCP uses TCP/IP to communicate between the peers, the two peers must be connected to each other. ICCP messages exchange MC-LAG configuration parameters and ensure that both peers use the correct LACP parameters.

The interchassis link-protection link (ICL-PL) provides redundancy when a link failure (for example, an MC-LAG trunk failure) occurs on one of the active links. The ICL-PL can be either a 10-Gigabit Ethernet interface or an aggregated Ethernet interface. You can configure only one ICL-PL between the two peers, although you can configure multiple MC-LAGs between them.

### Failure Handling

Configuring ICCP adjacency over aggregated links mitigates the possibility of a split-brain state. A split brain state occurs when the ICL-PL configured between the MC-LAG peers goes down. To work around this problem, enable backup liveness detection. With backup liveness enabled, the MC-LAG peers can communicate through the keepalive link.

During a split-brain state, the standby peer brings down local members in the MC-LAG links by changing the LACP system ID. When the ICCP connection is active, both of the MC-LAG peers use the configured LACP system ID. If the LACP system ID is changed during failures, the server that is connected over the MC-LAG removes these links from the aggregated Ethernet bundle.

When the ICL-PL is operationally down and the ICCP connection is active, the LACP state of the links with status control configured as standby is set to the standby state. When the LACP state of the links is changed to standby, the server that is connected over the MC-LAG makes these links inactive and does not use them for sending data.

[Table 151 on page 1933](#) describes the different ICCP failure scenarios. The dash means that the item is not applicable.

**Table 151: ICCP Failure Scenarios**

ICCP Connection Status	ICL-PL Status	Backup Liveness Peer Status	Action on Multichassis Aggregated Ethernet (MC-AE) Interface with Status Set to Standby
Down	Down or Up	Not configured	LACP system ID is changed to default value.



Table 151: ICCP Failure Scenarios (*continued*)

ICCP Connection Status	ICL-PL Status	Backup Liveness Peer Status	Action on Multichassis Aggregated Ethernet (MC-AE) Interface with Status Set to Standby
Down	Down or Up	Active	LACP system ID is changed to default value.
Down	Down or Up	Inactive	No change in LACP system ID.
Up	Down	–	LACP state is set to standby. MUX state moves to waiting state.

Split-brain states bring down the MC-LAG link completely if the primary peer members are also down for other reasons. Recovery from the split-brain state occurs automatically when the ICCP adjacency comes up between the MC-LAG peers.

### Multichassis Link Protection

Multichassis link protection provides link protection between the two MC-LAG peers hosting an MC-LAG. If the ICCP connection is up and the ICL-PL comes up, the peer configured as standby brings up the multichassis aggregated Ethernet (MC-AE) interfaces shared with the peer. Multichassis protection must be configured on each MC-LAG peer that is hosting an MC-LAG.

### MC-LAG Packet Forwarding

To prevent the server from receiving multiple copies from both of the MC-LAG peers, a block mask is used to prevent forwarding of traffic received on the ICL-PL toward the MC-AE interface. Preventing forwarding of traffic received on the ICL-PL interface toward the MC-AE interface ensures that traffic received on MC-LAG links is not forwarded back to the same link on the other peer. The forwarding block mask for a given MC-LAG link is cleared if all of the local members of the MC-LAG link go down on the peer. To achieve faster convergence, if all local members of the MC-LAG link are down, outbound traffic on the MC-LAG is redirected to the ICL-PL interface on the data plane.

### Layer 3 Routing

To provide Layer 3 routing functions to downstream clients, configure the same gateway address on both MC-LAG network peers. To upstream routers, the MC-LAG network peers could be viewed as either equal-cost multipath (ECMP) or two routes with different preference values.

Junos OS supports active-active MC-LAGs by using Virtual Router Redundancy Protocol (VRRP) over routed VLAN interfaces (RVIs). Junos OS also supports active-active MC-LAGs by using RVI MAC address synchronization. You must configure the RVI using the same IP address across MC-LAG peers. RVI MAC synchronization is supported on 32-bit interfaces and interoperates with earlier MPC and MIC releases.



## Spanning Tree Protocol (STP) Guidelines

- Enable STP globally.  
STP might detect local miswiring loops within the peer or across MC-LAG peers.  
STP might not detect network loops introduced by MC-LAG peers.
- Disable STP on ICL-PL links; otherwise, it might block ICL-PL ports and disable protection.
- Disable STP on interfaces that are connected to aggregation switches.
- Do not enable bridge protocol data unit (BPDU) block on interfaces connected to aggregation switches.

For more information about BPDU block, see [“Understanding BPDU Protection for STP, RSTP, and MSTP” on page 1413](#).

## MC-LAG Upgrade Guidelines

Upgrade the MC-LAG peers according to the following guidelines. See [“Upgrading Software on QFX3500 and QFX3600 Standalone Switches” on page 107](#) for exact details about how to perform a software upgrade.



**NOTE:** After a reboot, the MC-AE interfaces come up immediately and might start receiving packets from the server. If routing protocols are enabled, and the routing adjacencies have not been formed, packets might be dropped.

To prevent this scenario, issue the `set interfaces interface-name aggregated-ether-options mc-ae init-delay-time time` to set a time by which the routing adjacencies are formed.

1. Make sure that both of the MC-LAG peers (node1 and node2) are in the active-active state using the following command on any one of the MC-LAG peers:

```
user@switch> show interfaces mc-ae id 1
Member Link           : ae0
Current State Machine's State: mcae active state
Local Status          : active<<<<<<<
Local State           : up
Peer Status           : active<<<<<<<
Peer State            : up
Logical Interface     : ae0.0
Topology Type         : bridge
Local State           : up
Peer State            : up
Peer Ip/MCP/State     : 20.1.1.2 ae2.0 up
```

2. Upgrade node1 of the MC-LAG.

When node1 is upgraded it is rebooted, and all traffic is sent across the available LAG interfaces of node2, which is still up. The amount of traffic lost depends on how quickly the neighbor devices detect the link loss and rehash the flows of the LAG.



3. Verify that node1 is running the software you just installed. Issue the **show version** command.
4. Make sure that both nodes of the MC-LAG (node1 and node2) are in the active-active state after the reboot of node1.
5. Upgrade node2 of the MC-LAG.  
Repeat step 1 through step 3 to upgrade node2.

---

### Layer 2 Unicast Features Supported

The following Layer 2 unicast features are supported:

- L2 unicast: learning and aging
  - Learned MAC addresses are propagated across MC-LAG peers for all of the VLANs that are spawned across the peers.
  - Aging of MAC addresses occurs when the MAC address is not seen on both of the peers.
  - MAC learning is disabled on the ICL-PL automatically.
  - MAC addresses learned on single-homed links are propagated across all of the VLANs that have MC-LAG links as members.

---

### Layer 2 Multicast Features Supported

The following Layer 2 multicast features are supported:

- L2 multicast: unknown unicast and IGMP snooping
  - Flooding happens on all links across peers if both peers have virtual LAN membership. Only one of the peers forwards traffic on a given MC-LAG link.
  - Known and unknown multicast packets are forwarded across the peers by adding the ICL-PL port as a multicast router port.
  - IGMP membership learned on MC-LAG links is propagated across peers.
  - During an MC-LAG peer reboot, known multicast traffic is flooded until the IGMP snooping state is synced with the peer.

---

### IGMP Snooping on an Active-Active MC-LAG

IGMP snooping controls multicast traffic in a switched network. When IGMP snooping is not enabled, the Layer 2 device broadcasts multicast traffic out of all of its ports, even if the hosts on the network do not want the multicast traffic. With IGMP snooping enabled, a Layer 2 device monitors the IGMP join and leave messages sent from each connected host to a multicast router. This enables the Layer 2 device to keep track of the multicast groups and associated member ports. The Layer 2 device uses this information to make intelligent decisions and to forward multicast traffic to only the intended destination hosts. IGMP uses Protocol Independent Multicast (PIM) to route the multicast traffic. PIM uses distribution trees to determine which traffic is forwarded.



In an active-active MC-LAG configuration, IGMP snooping replicates the Layer 2 multicast routes so that each MC-LAG peer has the same routes. If a device is connected to an MC-LAG peer by way of a single-homed interface, IGMP snooping replicates join message to its IGMP snooping peer. If a multicast source is connected to an MC-LAG by way of a Layer 3 device, the Layer 3 device passes this information to the RVI that is configured on the MC-LAG. The first hop DR is responsible for sending the register and register-stop messages for the multicast group. The last hop DR is responsible for sending PIM join and leave messages toward the rendezvous point and source for the multicast group. The routing device with the smallest preference metric forwards traffic on transit LANs.

Configure the ICL-PL interface as a router-facing interface. For the scenario in which traffic arrives by way of a Layer 3 interface, PIM and IGMP must be enabled on the RVI interface configured on the MC-LAG peers.

### Layer 3 Unicast Features Supported

The following Layer 3 unicast features are supported:

- VRRP active-standby support enables Layer 3 routing over MC-AE interfaces.
- Routed VLAN interface (RVI) MAC address synchronization enables MC-LAG peers to forward Layer 3 packets arriving on MC-AE interfaces with either its own RVI MAC address or its peer's RVI MAC address.
- Address Resolution Protocol (ARP) synchronization enables ARP resolution on both of the MC-LAG peers.
- DHCP Relay with option 82 enables option 82 on the MC-LAG peers. Option 82 provides information about the network location of DHCP clients. The DHCP server uses this information to implement IP addresses or other parameters for the client.

### VRRP Active-Standby Support

VRRP in active-standby mode enables Layer 3 routing over the MC-AE interfaces on the MC-LAG peers. In this mode, the MC-LAG peers act as virtual routers. The virtual routers share the virtual IP address that corresponds to the default route configured on the host or server connected to the MC-LAG. This virtual IP address, known as a routed VLAN interface (RVI), maps to either of the VRRP MAC addresses or the logical interfaces of the MC-LAG peers. The host or server uses the VRRP MAC address to send any Layer 3 upstream packets. At any time, one of the VRRP routers is the master (active), and the other is a backup (standby). Both VRRP active and VRRP backup routers forward Layer 3 traffic arriving on the MC-AE interface. If the master router fails, all the traffic shifts to the MC-AE link on the backup router.



**NOTE:** You must configure VRRP on both MC-LAG peers in order for both the active and standby members to accept and route packets. Additionally, configure the VRRP backup router to send and receive ARP requests.

Routing protocols run on the primary IP address of the RVI, and both of the MC-LAG peers run routing protocols independently. The routing protocols use the primary IP address



of the RVI and the RVI MAC address to communicate with the MC-LAG peers. The RVI MAC address of each MC-LAG peer is replicated on the other MC-LAG peer and is installed as a MAC address that has been learned on the ICL-PL.

### Routed VLAN Interface (RVI) MAC Address Synchronization

---

Routed VLAN interface (RVI) MAC address synchronization enables MC-LAG peers to forward Layer 3 packets arriving on MC-AE interfaces with either its own RVI MAC address or its peer's RVI MAC address. Each MC-LAG peer installs its own RVI MAC address as well as the peer's RVI MAC address in the hardware. Each MC-LAG peer treats the packet as if it were its own packet. If RVI MAC address synchronization is not enabled, the RVI MAC address is installed on the MC-LAG peer as if it was learned on the ICL-PL.



**NOTE:** If you need routing capability, configure both VRRP and routing protocols on each MC-LAG peer.

Control packets destined for a particular MC-LAG peer that arrive on an MC-AE interface of its MC-LAG peer are not forwarded on the ICL-PL interface. Additionally, using the gateway IP address as a source address when you issue either a ping, traceroute, telnet, or FTP request is not supported.

To enable RVI MAC address synchronization, issue the **set vlan *vlan-name* l3\_interface *rvi-name* mcae-mac-synchronize** on each MC-LAG peer. Configure the same IP address on both MC-LAG peers. This IP address is used as the default gateway for the MC-LAG servers or hosts.

### Address Resolution Protocol (ARP)

---

Address Resolution Protocol (ARP) maps IP addresses to MAC addresses. Without synchronization, if one MC-LAG peer sends an ARP request, and the other MC-LAG peer receives the response, ARP resolution is not successful. With synchronization, the MC-LAG peers synchronize the ARP resolutions by sniffing the packet at the MC-LAG peer receiving the ARP response and replicating this to the other MC-LAG peer. This ensures that the entries in ARP tables on the MC-LAG peers are consistent.

When one of the MC-LAG peers restarts, the ARP destinations on its MC-LAG peer are synchronized. Because the ARP destinations are already resolved, its MC-LAG peer can forward Layer 3 packets out of the MC-AE interface.

### DHCP Relay with Option 82

---

DHCP relay with option 82 provides information about the network location of DHCP clients. The DHCP server uses this information to implement IP addresses or other parameters for the client. With DHCP relay enabled, DHCP request packets might take the path to the DHCP server through either of the MC-LAG peers. Because the MC-LAG peers have different host names, chassis MAC addresses, and interface names, you need to observe these requirements when you configure DHCP relay with option 82:

- Use the interface description instead of the interface name.
- Do not use the hostname as part of the circuit ID or remote ID strings.



- Do not use the chassis MAC address as part of the remote ID string.
- Do not enable the vendor ID.
- If the ICL-PL interface receives DHCP request packets, the packets are dropped to avoid duplicate packets in the network.

A counter called *Due to received on ICL interface* has been added to the **show helper statistics** command, which tracks the packets that the ICL-PL interface drops.

An example of the CLI output follows:

```
user@switch> show helper statistics
BOOTP:
  Received packets: 6
  Forwarded packets: 0
  Dropped packets: 6
    Due to no interface in DHCP Relay database: 0
    Due to no matching routing instance: 0
    Due to an error during packet read: 0
    Due to an error during packet send: 0
    Due to invalid server address: 0
    Due to no valid local address: 0
    Due to no route to server/client: 0
    Due to received on ICL interface: 6
```

The output shows that six packets received on the ICL-PL interface have been dropped.

### Private VLAN (PVLAN)

Private VLANs allow you to split a broadcast domain into multiple isolated broadcast subdomains, essentially putting a VLAN inside of a VLAN. A PVLAN can span multiple peers on an MC-LAG.

When configuring a PVLAN, you must configure the ICL-PL interface as the PVLAN trunk interface for the PVLAN. This is essential for traffic to be switched to the required primary and secondary ports of the PVLAN across the MC-LAG peers.

### Layer 3 Multicast

- [PIM Operation With Normal Mode DR Election on page 1939](#)
- [PIM Operation with Dual-DR Mode on page 1940](#)
- [Configuration Guidelines and Caveats on page 1940](#)

Protocol Independent Multicast (PIM) and Internet Group Management Protocol (IGMP) provide support for Layer 3 multicast. In addition to the standard mode of PIM operation, there is a special mode called PIM dual DR (designated router). PIM dual DR minimizes traffic loss in case of failures.

#### ***PIM Operation With Normal Mode DR Election***

In normal mode DR election, the RVI interfaces on both of the MC-LAG peers are configured with PIM enabled. In this mode, one of the MC-LAG peers becomes the DR through the PIM DR election mechanism. The elected DR maintains the rendezvous-point tree (RPT) and shortest-path tree (SPT) so it can receive data from the source device. The elected DR participates in periodic PIM join and prune activities toward the rendezvous point (RP) or the source.



The trigger for initiating these join and prune activities is the IGMP membership reports that are received from interested receivers. IGMP reports received over MC-AE interfaces (potentially hashing on either of the MC-LAG peers) and single-homed links are synchronized to the MC-LAG peer through ICCP.

Both MC-LAG peers receive traffic on their incoming interface (IIF). The non-DR receives traffic by way of the ICL-PL interface, which acts as a multicast router (mrouter) interface.

If the DR fails, the non-DR has to build the entire forwarding tree (RPT and SPT), which can cause multicast traffic loss.

### ***PIM Operation with Dual-DR Mode***

In this mode, both of MC-LAG peers act as DRs (active and backup) and send periodic join and prune messages upstream towards the RP, or source, and eventually join the RPT or SPT.

The primary MC-LAG peer forwards the multicast traffic to the receiver devices even if the standby MC-LAG peer has a smaller preference metric.

The standby MC-LAG peer also joins the forwarding tree and receives the multicast data. The standby MC-LAG peer drops the data because it has an empty outgoing interface list (OIL). When the standby MC-LAG peer detects the primary MC-LAG peer failure, it adds the receiver VLAN to the OIL, and starts to forward the multicast traffic

To enable a multicast dual DR, issue the **set protocols pim interface interface-name dual-dr** command on the VLAN interfaces of each MC-LAG peer.

### ***Configuration Guidelines and Caveats***

- Configure the IP address on the active MC-LAG peer with a high IP address or a high DR priority. To ensure that the active MC-LAG peer retains the DR membership designation if PIM neighborship with the peer goes down.
- Using Bidirectional Forwarding Detection (BFD) and RVI MAC synchronization together is not supported because ARP fails.
- When using RVI MAC synchronization, make sure that you configure the primary IP address on both MC-LAG peers. Doing this ensures that both MC-LAG peers cannot become assert winners.
- The number of BFD sessions on RVIs with PIM enabled is restricted to 100. Also, If you have more than 100 RVIs configured, do not configure BFD, and make sure that the hello interval is 2 seconds.

#### **Related Documentation**

- [Configuring Link Aggregation on page 2033](#)
- [Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch on page 1950](#)
- [Example: Configuring Multichassis Link Aggregation on page 1958](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on page 1972](#)



- [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast using MAC Address Synchronization on page 1995](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using Virtual Router Redundancy Protocol \(VRRP\) on page 2011](#)

## Overview of Uplink Failure Detection

Uplink failure detection allows a switch to detect link failure on uplink interfaces and to propagate this information to the downlink interfaces, so that servers connected to those downlinks can switch over to secondary interfaces.

Uplink failure detection supports network adapter teaming and provides network redundancy. In network adapter teaming, all of the network interface cards (NICs) on a server are configured in a primary or secondary relationship and share the same IP address. When the primary link goes down, the server transparently shifts the connection to the secondary link. With uplink failure detection, the switch monitors uplink interfaces for link failures. When it detects a failure, it disables the downlink interfaces. When the server detects disabled downlink interfaces, it switches over to the secondary link to help ensure that the traffic of the failed link is not dropped.

This topic describes:

- [Uplink Failure Detection Configuration on page 1941](#)
- [Failure Detection Pair on page 1942](#)

---


### Uplink Failure Detection Configuration

Uplink failure detection allows switches to monitor uplink interfaces to spot link failures. When a switch detects a link failure, it automatically disables the downlink interfaces bound to the uplink interface. A server that is connected to the disabled downlink interface triggers a network adapter failover to a secondary link to avoid any traffic loss.

[Figure 40 on page 1942](#) illustrates a typical setup for uplink failure detection.



Figure 40: Uplink Failure Detection Configuration on Switches

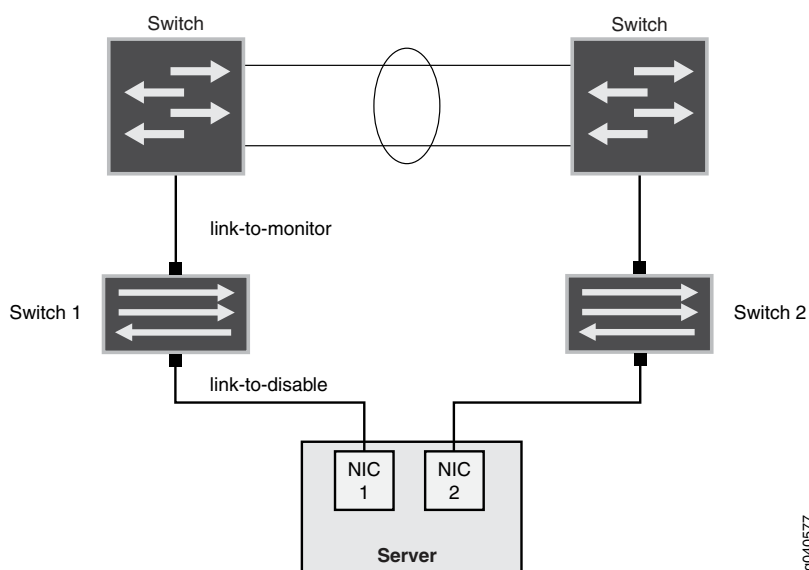

For uplink failure detection, you specify a group of uplink interfaces to be monitored and downlink interfaces to be brought down when an uplink fails. The downlink interfaces are bound to the uplink interfaces within the group. If all uplink interfaces in a group go down, then the switch brings down all downlink interfaces within that group. If any uplink interface returns to service, then the switch brings all downlink interfaces in that group back to service.

The switch can monitor both physical interface links and logical interface links for uplink failures, but you must put the two types of interfaces into separate groups.



**NOTE:** For logical interfaces, the server must send keepalives between the switch and the server to detect failure of logical links.

### Failure Detection Pair

Uplink failure detection requires that you create pairs of uplink and downlink interfaces in a group. Each pair includes one of each of the following:

- A link-to-monitor interface—The link-to-monitor interfaces specify the uplinks the switch monitors. You can configure a maximum of eight uplink interfaces as link-to-monitor interfaces for a group.
- A link-to-disable interface—The link-to-disable interfaces specify the downlinks the switch disables when the switch detects an uplink failure. You can configure a maximum of 48 downlinks to disable in the group.

The link-to-disable interfaces are bound to the link-to-monitor interfaces within the group. When a link-to-monitor interface returns to service, the switch automatically enables all link-to-disable interfaces in the group.



- Related Documentation**
- [Configuring Interfaces for Uplink Failure Detection on page 2032](#)
  - [Example: Configuring Interfaces for Uplink Failure Detection on page 1945](#)







## CHAPTER 24

# Configuration

- [Configuration Examples on page 1945](#)
- [Configuration Tasks on page 2028](#)
- [Configuration Statements on page 2043](#)

### Configuration Examples

---

- [Example: Configuring Interfaces for Uplink Failure Detection on page 1945](#)
- [Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch on page 1950](#)
- [Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch on page 1954](#)
- [Example: Configuring Multichassis Link Aggregation on page 1958](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on page 1972](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast using MAC Address Synchronization on page 1995](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using Virtual Router Redundancy Protocol \(VRRP\) on page 2011](#)

### Example: Configuring Interfaces for Uplink Failure Detection

Uplink failure detection allows a switch to detect link failure on uplink interfaces and to propagate the failure information to the downlink interfaces. All of the network interface cards (NICs) on a server are configured as being either the primary link or the secondary link and share the same IP address. When the primary link goes down, the server transparently shifts the connection to the secondary link to ensure that the traffic on the failed link is not dropped.

This example describes:

- [Requirements on page 1946](#)
- [Overview and Topology on page 1946](#)
- [Configuring Uplink Failure Detection on Both Switches on page 1947](#)
- [Verification on page 1948](#)



## Requirements

This example uses the following software and hardware components:

- Junos OS Release 12.1 or later for the QFX Series
- Two QFX3500 switches
- Two aggregation switches
- One dual-homed server

## Overview and Topology

The topology in this example illustrates how to configure uplink failure detection on Switch A and Switch B. Switch A and Switch B are both configured with a link-to-monitor interface (the uplink interface to the aggregation switch) and a link-to-disable interface (the downlink interface to the server). For simplicity, only one group of link-to-monitor interfaces and link-to-disable interfaces is configured for each switch. The server is dual-homed to both Switch A and Switch B. In this scenario, if the link-to-monitor interface to Switch A is disabled, the server uses the link-to-monitor interface to Switch B instead.



**NOTE:** This example does not describe how to configure the dual-homed server or the aggregation switches. Please refer to the documentation for each of these devices for more information.

Figure 40 on page 1942 illustrates a typical setup for uplink failure detection.

**Figure 41: Uplink Failure Detection Configuration on Switches**

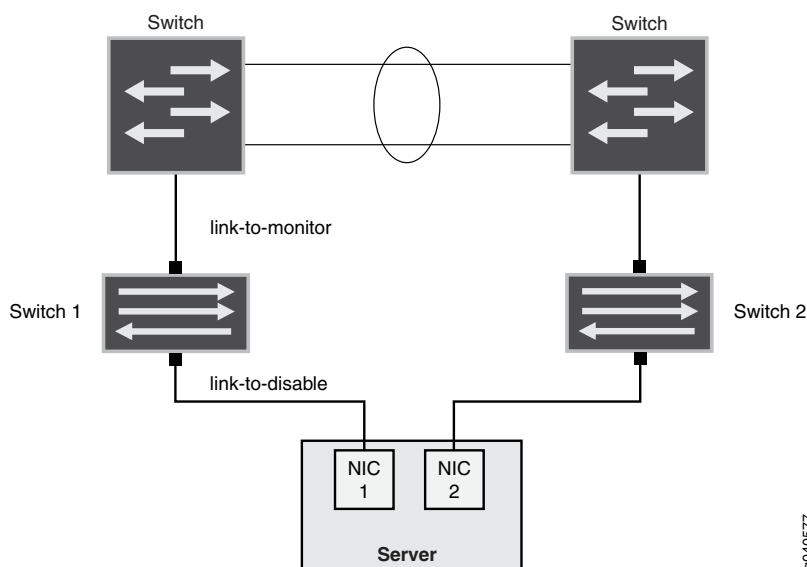


Table 152 on page 1947 lists uplink failure settings for each QFX3500 switch.



Table 152: Settings for Uplink Failure Protection Example

Switch A	Switch B
<ul style="list-style-type: none"> <li>Group name: Group1</li> <li>Link-to-monitor interface: <b>xe-0/0/0</b></li> <li>Link-to-disable interface: <b>xe-0/0/1</b></li> </ul>	<ul style="list-style-type: none"> <li>Group name: Group2</li> <li>Link-to-monitor interface: <b>xe-0/0/0</b></li> <li>Link-to-disable interface: <b>xe-0/0/1</b></li> </ul>

### Configuring Uplink Failure Detection on Both Switches

To configure uplink failure detection on both switches, perform these tasks:

#### CLI Quick Configuration

To quickly configure uplink failure protection on Switch A and Switch B, copy the following commands and paste them into the switch terminal window:

```
[edit protocols]
set uplink-failure-detection group group1
set uplink-failure-detection group group2
set uplink-failure-detection group group1 link-to-monitor xe-0/0/0
set uplink-failure-detection group group2 link-to-monitor xe-0/0/0
set uplink-failure-detection group group1 link-to-disable xe-0/0/1
set uplink-failure-detection group group2 link-to-disable xe-0/0/1
```

#### Step-by-Step Procedure

To configure uplink failure protection on both switches:

- Specify a name for the uplink failure detection group on Switch A:  

```
[edit protocols]
user@switch# set uplink-failure-detection group group1
```
- Add an uplink interface to the group on Switch A:  

```
[edit protocols]
user@switch# set uplink-failure-detection group group1 link-to-monitor xe-0/0/0
```
- Add a downlink interface to the group on Switch A:  

```
[edit protocols]
user@switch# set uplink-failure-detection group group1 link-to-disable xe-0/0/1
```
- Specify a name for the uplink failure detection group on Switch B:  

```
[edit protocols]
user@switch# set uplink-failure-detection group group2
```
- Add an uplink interface to the group on Switch B:  

```
[edit protocols]
user@switch# set uplink-failure-detection group group2 link-to-monitor xe-0/0/0
```
- Add a downlink interface to the group on Switch B:  

```
[edit protocols]
user@switch# set uplink-failure-detection group group2 link-to-disable xe-0/0/1
```

**Results** Display the results of the configuration:

```
uplink-failure-detection {
  group {
    group1 {
      link-to-monitor {
        xe-0/0/0;
      }
      link-to-disable {
        xe-0/0/1;
      }
    }
  }
}
```



```

    }
  }
  group2 {
    link-to-monitor {
      xe-0/0/0;
    }
    link-to-disable {
      xe-0/0/1;
    }
  }
}
}

```

## Verification

To verify that uplink failure detection is working correctly, perform the following tasks on Switch A and Switch B:

- [Verifying That Uplink Failure Detection is Working Correctly on page 1948](#)

### *Verifying That Uplink Failure Detection is Working Correctly*

**Purpose** Verify that the switch disables the downlink interface when it detects an uplink failure.

**Action** 1. View the current uplink failure detection status:

```

user@switch> show uplink-failure-detection
Group                : group1
Uplink               : xe-0/0/0*
Downlink             : xe-0/0/1*
Failure Action       : Inactive

```



**NOTE:** The asterisk (\*) indicates that the link is up.

2. Disable the uplink interface:

```

[edit]
user@switch# set interface xe-0/0/0 disable

```

3. Save the configuration on the switch.

4. View the current uplink failure detection status:

```

user@switch> show uplink-failure-detection
Group                : group1
Uplink               : xe-0/0/0
Downlink             : xe-0/0/1
Failure Action       : Active

```

**Meaning** The output in Step 1 shows that the uplink interface is up, and hence that the downlink interface is also up, and that the status of **Failure Action** is **Inactive**.

The output in Step 4 shows that both the uplink and downlink interfaces are down (there are no asterisks after the interface name) and that the status of **Failure Action** is changed to **Active**. This output shows that uplink failure detection is working.



**Related  
Documentation**

- [Overview of Uplink Failure Detection on page 1941](#)
- [Configuring Interfaces for Uplink Failure Detection on page 2032](#)
- [Verifying That Uplink Failure Detection Is Working Correctly on page 2126](#)



## Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch

A QFX Series product allows you to combine multiple Ethernet links into one logical interface for higher bandwidth and redundancy. The ports that are combined in this manner are referred to as a link aggregation group (LAG) or bundle. The number of Ethernet links you can combine into a LAG depends on your QFX Series product model. You can configure LAGs to connect a QFX Series product to other switches, like aggregation switches, servers, or routers. This example describes how to configure LAGs to connect a QFX3500 switch to an aggregation switch.

- [Requirements on page 1950](#)
- [Overview and Topology on page 1950](#)
- [Configuration on page 1951](#)
- [Verification on page 1953](#)
- [Troubleshooting on page 1953](#)

---

### Requirements

This example uses the following software and hardware components:

- Junos OS Release 11.1 or later for the QFX Series
- One QFX3500 switch

---

### Overview and Topology

In this example, the QFX3500 switch has one LAG comprising two 10-Gigabit Ethernet interfaces. This LAG is configured in port mode so that the QFX3500 switch and the VLAN to which it has been assigned can send and receive traffic.

Configuring the Ethernet interfaces as LAGs has the following advantages:

- If one physical port is lost for any reason (a cable is unplugged or a switch port fails), the logical port transparently continues to function over the remaining physical port.
- Link Aggregation Control Protocol (LACP) can optionally be configured for link monitoring and automatic addition and deletion of individual links without user intervention.



**NOTE:** If the remote end of the LAG link is a security device, LACP might not be supported because security devices require a deterministic configuration. In this case, do not configure LACP. All links in the LAG are permanently operational unless the switch detects a link failure within the Ethernet physical layer or data link layers.

---



The topology used in this example consists of one QFX3500 switch with a LAG configured between two of its 10-Gigabit Ethernet interfaces. The QFX3500 switch is connected to an aggregation switch.

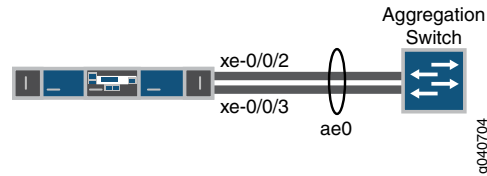


Table 153 on page 1951 details the topology used in this configuration example.

**Table 153: Components of the Topology for Configuring a LAG Between a QFX3500 Switch and Aggregation Switch**

Hostname	Base Hardware	Trunk Port
switch	QFX3500 switch	ae0 is configured as a trunk port and combines the following two interfaces: xe-0/0/2 and xe-0/0/3

### Configuration

To configure a LAG between two 10-Gigabit Ethernet interfaces:

#### CLI Quick Configuration

To quickly configure a LAG between two 10-Gigabit Ethernet interfaces on a QFX3500 switch, copy the following commands and paste them into the QFX3500 switch terminal window:

```
[edit]
set chassis aggregated-devices ethernet device-count 1
set interfaces ae0 aggregated-ether-options minimum-links 1
set interfaces ae0 aggregated-ether-options link-speed 10g
set interfaces ae0 unit 0 family ethernet-switching vlan members green
set interfaces xe-0/0/2 ether-options 802.ad ae0
set interfaces xe-0/0/3 ether-options 802.ad ae0
```

#### Step-by-Step Procedure

To configure a LAG between a QFX Series product and an aggregation switch:

- Specify the number of LAGs to be created on the switch:
 

```
[edit chassis]
user@switch# set aggregated-devices ethernet device-count 1
```
- Specify the number of links that need to be present for the ae0 LAG interface to be up:
 

```
[edit interfaces]
user@switch# set ae0 aggregated-ether-options minimum-links 1
```
- Specify the media speed of the ae0 link:
 

```
[edit interfaces]
user@switch# set ae0 aggregated-ether-options link-speed 10g
```
- Assign the LAG to a VLAN:
 

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching vlan members vlan200
```



5. (Optional): Designate one side of the LAG as active for LACP:

```
[edit interfaces]
user@switch# set ae0 aggregated-ether-options lacp active
```

6. (Optional): Designate the interval and speed at which the interfaces send LACP packets:

```
[edit interfaces]
user@switch# set ae0 aggregated-ether-options lacp periodic fast
```

### **Results**

Display the results of the configuration:

```
[edit]
chassis {
  aggregated-devices {
    ethernet {
      device-count 1;
    }
  }
}
green {
  vlan-id 200;
}
}
interfaces {
  ae0 {
    aggregated-ether-options {
      link-speed 10g;
      minimum-links 1;
    }
    unit 0 {
      description yellow;
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members green;
        }
      }
    }
  }
}
xe-0/0/2 {
  ether-options {
    802.ad ae0;
  }
}
xe-0/0/3 {
  ether-options {
    802.ad ae0;
  }
}
}
```



## Verification

To verify that switching is operational and one LAG has been created, perform these tasks:

- [Verifying That LAG ae0.0 Has Been Created on page 1953](#)
- [Verifying That LAG ae0 Has Been Created on page 1953](#)

### *Verifying That LAG ae0.0 Has Been Created*

**Purpose** Verify that LAG ae0.0 has been created on the switch.

**Action** `show interfaces ae0 terse`

Interface	Admin	Link	Proto	Local	Remote
ae0	up	up			
ae0.0	up	up	eth-switch		

**Meaning** The output confirms that the ae0.0 link is up and shows the **family** and IP address assigned to this link.

### *Verifying That LAG ae0 Has Been Created*

**Purpose** Verify that LAG ae0 has been created on the switch

**Action** `show interfaces ae0 terse`

Interface	Admin	Link	Proto	Local	Remote
ae0	up	down			
ae0.0	up	down	eth-switch		

**Meaning** The output shows that the ae0.0 link is down.

## Troubleshooting

### *Troubleshooting a LAG That Is Down*

**Problem** The `show interfaces terse` command shows that the LAG is **down**.

**Solution** Check the following:

- Verify that there is no configuration mismatch.
- Verify that all member ports are up.
- Verify that a LAG is part of family ethernet switching (Layer 2 LAG) or family inet (Layer 3 LAG).
- Verify that the LAG member is connected to the correct LAG at the other end.

**Related Documentation**

- [Configuring Link Aggregation on page 2033](#)
- [Verifying the Status of a LAG Interface on page 2124](#)



- [Verifying That LACP Is Configured Correctly and Bundle Members Are Exchanging LACP Protocol Packets on page 2125](#)
- [Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch on page 1954](#)
- [show lacp statistics interfaces \(View\) on page 2307](#)

## Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch

QFX Series products allow you to combine multiple Ethernet links into one logical interface for higher bandwidth and redundancy. The ports that are combined in this manner are referred to as a link aggregation group (LAG) or bundle. The number of Ethernet links you can combine into a LAG depends on your QFX Series product model. On a QFX3500 standalone switch, you can group up to 32 Ethernet interfaces to form a LAG. On a QFabric system, you can group up to 8 Ethernet interfaces to form a LAG. QFX Series products allow you to further enhance these links by configuring Link Aggregation Control Protocol (LACP).

This example describes how to overlay LACP on the LAG configurations that were created in [“Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch” on page 1950](#):

- [Requirements on page 1954](#)
- [Overview and Topology on page 1954](#)
- [Configuring LACP for the LAG on the QFX Series on page 1955](#)
- [Verification on page 1955](#)
- [Troubleshooting on page 1957](#)

### Requirements

---

This example uses the following software and hardware components:

- Junos OS Release 11.1 or later for the QFX Series
- One QFX3500 switch

Before you configure LACP, be sure you have:

- Configured the ports on the switches as trunk ports.
- Configured the LAG.

### Overview and Topology

---

The topology in this example is exactly the same as the topology used in the [Configuring a LAG Between a QFX Switch and an Aggregation Switch](#) example. This example shows how to use LACP to enhance the LAG functionality.

LACP exchanges are made between *actors* (the transmitting link) and *partners* (the receiving link). The LACP mode can be either active or passive.





**NOTE:** If the actor and partner are both in passive mode, they do not exchange LACP packets, which results in the aggregated Ethernet links not coming up. By default, LACP is in passive mode. To initiate transmission of LACP packets and responses to LACP packets, you must enable LACP in active mode.

By default, the actor and partner send LACP packets every second. You can configure the interval at which the interfaces send LACP packets by including the **periodic** statement at the **[edit interfaces *interface-name* aggregated-ether-options lacp]** hierarchy level.

The interval can be fast (every second) or slow (every 30 seconds).

### Configuring LACP for the LAG on the QFX Series

To configure LACP for a QFX Series LAG, perform these tasks:

**CLI Quick Configuration** To quickly configure LACP for the access switch LAGs, copy the following commands and paste them into the switch terminal window:

```
[edit]
set interfaces ae0 aggregated-ether-options lacp active periodic fast
```

**Step-by-Step Procedure** To configure LACP for LAG ae0 :

1. Specify the aggregated Ethernet options for the LAG:

```
[edit interfaces]
user@switch# set ae0 aggregated-ether-options lacp active periodic fast
```

**Results** Display the results of the configuration:

```
[edit interfaces]
user@switch# show
ae0 {
  aggregated-ether-options {
    lacp {
      active;
      periodic fast;
    }
  }
}
```

### Verification

To verify that LACP packets are being exchanged, perform the following tasks:

- [Verifying the LACP Settings on page 1955](#)
- [Verifying That the LACP Packets Are Being Exchanged on page 1956](#)

#### Verifying the LACP Settings

**Purpose** Verify that LACP has been set up correctly.



**Action** Use the **show lacp interfaces *interface-name*** command to check that LACP has been enabled as active on one end.

```
user@switch> show lacp interfaces xe-0/0/2
```

```
Aggregated interface: ae0
```

LACP state:	Role	Exp	Def	Dist	CoI	Syn	Aggr	Timeout	Activity
xe-0/0/2	Actor	No	Yes	No	No	No	Yes	Fast	Active
xe-0/0/2	Partner	No	Yes	No	No	No	Yes	Fast	Passive
LACP protocol:	Receive State			Transmit State				Mux State	
xe-0/0/2	Defaulted			Fast periodic				Detached	

**Meaning** The output indicates that LACP has been set up correctly and is active at one end.

#### *Verifying That the LACP Packets Are Being Exchanged*

**Purpose** Verify that LACP packets are being exchanged.

**Action** Use the **show interfaces aex statistics** command to display LACP information.

```
user@switch> show interfaces ae0 statistics
```

```
Physical interface: ae0, Enabled, Physical link is Down
Interface index: 153, SNMP ifIndex: 30
Link-level type: Ethernet, MTU: 1514, Speed: Unspecified, Loopback: Disabled,
Source filtering: Disabled, Flow control: Disabled, Minimum links needed: 1,
Minimum bandwidth needed: 0
Device flags   : Present Running
Interface flags: Hardware-Down SNMP-Traps Internal: 0x0
Current address: 02:19:e2:50:45:e0, Hardware address: 02:19:e2:50:45:e0
Last flapped   : Never
Statistics last cleared: Never
  Input packets : 0
  Output packets: 0
Input errors: 0, Output errors: 0

Logical interface ae0.0 (Index 71) (SNMP ifIndex 34)
Flags: Hardware-Down Device-Down SNMP-Traps Encapsulation: ENET2
Statistics      Packets      pps      Bytes      bps
Bundle:
  Input :          0          0          0          0
  Output:          0          0          0          0
Protocol inet
Flags: None
Addresses, Flags: Dest-route-down Is-Preferred Is-Primary
  Destination: 10.10.10/24, Local: 10.10.10.1, Broadcast: 10.10.10.255
```

**Meaning** The output here shows that the link is down and that no PDUs are being exchanged.



### Troubleshooting

---

To troubleshoot a nonworking LACP link, perform these tasks:

- [Troubleshooting a Nonworking LACP Link on page 1957](#)

#### *Troubleshooting a Nonworking LACP Link*

**Problem** The LACP link is not working.

**Solution** Check the following:

- Remove the LACP configuration and verify whether the static LAG is up.
- Verify that LACP is configured at both ends.
- Verify that LACP is not passive at both ends.
- Verify whether LACP protocol data units (PDUs) are being exchanged by running the **monitor traffic-interface lag-member detail** command.

**Related  
Documentation**

- [Configuring Link Aggregation on page 2033](#)
- [Verifying the Status of a LAG Interface on page 2124](#)
- [Verifying That LACP Is Configured Correctly and Bundle Members Are Exchanging LACP Protocol Packets on page 2125](#)
- [Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch on page 1950](#)
- [show lacp statistics interfaces \(View\) on page 2307](#)



## Example: Configuring Multichassis Link Aggregation

Multichassis link aggregation groups (MC-LAGs) enable a client device to form a logical LAG interface between two switches. An MC-LAG provides redundancy and load balancing between the two switches, multihoming support, and a loop-free Layer 2 network without running Spanning Tree Protocol (STP).

The peers in an MC-LAG use an interchassis control link-protection link (ICL-PL) to replicate forwarding information across the peers. The Interchassis Control Protocol (ICCP) exchanges the control information between two MC-LAG switches. Additionally, ICCP propagates the operational state of MC-LAG members through the ICL-PL.

On one end of an MC-LAG is an MC-LAG client device, such as a server, that has one or more physical links in a link aggregation group (LAG). This client device does not need to detect the MC-LAG. On the other side of an MC-LAG are two MC-LAG switches. Each of the switches has one or more physical links connected to a single client device. The switches coordinate with each other to ensure that data traffic is forwarded properly.

- [Requirements on page 1958](#)
- [Overview on page 1958](#)
- [Configuration on page 1959](#)
- [Verification on page 1969](#)
- [Troubleshooting on page 1972](#)

### Requirements

---

This example uses the following hardware and software components:

- Junos OS Release 12.2 or later for the QFX Series
- Two switches

Before you configure an MC-LAG, be sure that you understand how to:

- Configure aggregated Ethernet interfaces on a switch. See [“Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch” on page 1950](#).
- Configure the Link Aggregation Control Protocol (LACP) on aggregated Ethernet interfaces on a switch. See [“Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch” on page 1954](#).

### Overview

---


In this example, you configure an MC-LAG across two switches, consisting of two aggregated Ethernet interfaces, an interchassis control link-protection link (ICL-PL), multichassis protection link for the ICL-PL, ICCP for the peers hosting the MC-LAG, and Layer 3 connectivity between MC-LAG peers. Layer 3 connectivity is required for ICCP.



### Topology

The topology used in this example consists of two switches hosting an MC-LAG. The two switches are connected to a server. [Figure 42 on page 1959](#) shows the topology of this example.

**Figure 42: Configuring a Multichassis LAG Between Switch A and Switch B**

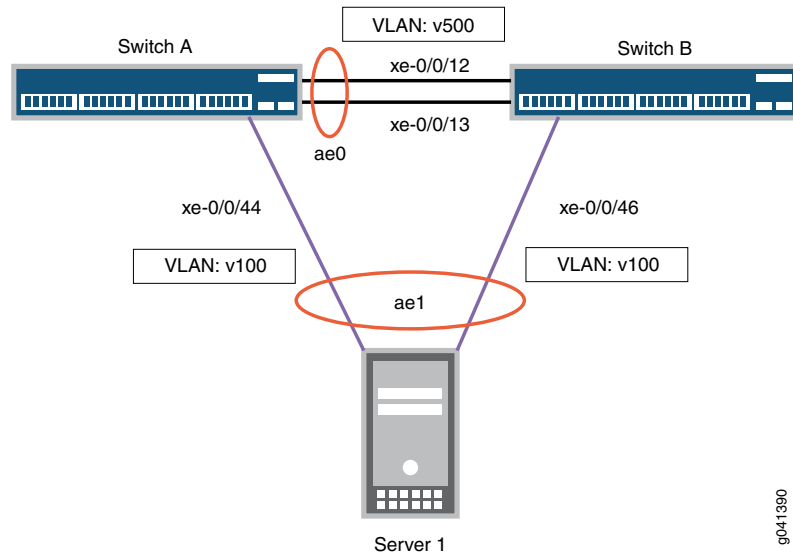

[Table 153 on page 1951](#) details the topology used in this configuration example.

**Table 154: Components of the Topology for Configuring a Multichassis LAG Between Two Switches**

Hostname	Base Hardware	Multichassis Link Aggregation Group
Switch A	QFX3500 switch or QFX3600 switch	<b>ae0</b> is configured as an aggregated Ethernet interface, and is used as an ICL-PL. The following interfaces are part of <b>ae0</b> : <b>xe-0/0/12</b> and <b>xe-0/0/13</b> on Switch A and <b>xe-0/0/12</b> and <b>xe-0/0/13</b> on Switch B.  <b>ae1</b> is configured as an MC-LAG, and the following two interfaces are part of <b>ae1</b> : <b>xe-0/0/44</b> on Switch A and <b>xe-0/0/46</b> on Switch B.
Switch B	QFX3500 switch or QFX3600 switch	

### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network



configuration, and paste the commands into the CLI at the **[edit]** hierarchy level of Switch A.

```
set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/44 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces vlan unit 500 family inet address 3.3.3.2/24
set vlans v100 vlan-id 100
set vlans v500 vlan-id 500
set vlans v500 l3-interface vlan.500
set protocols iccp local-ip-addr 3.3.3.2
set protocols iccp peer 3.3.3.1 session-establishment-hold-time 50
set protocols iccp peer 3.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 3.3.3.1 liveness-detection minimum-receive-interval 60
set protocols iccp peer 3.3.3.1 liveness-detection transmit-interval minimum-interval 60
set protocols rstp interface ae0.0 disable
set protocols rstp interface ae1.0 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 3.3.3.1 interface ae0
```

To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, and paste the commands into the CLI at the **[edit]** hierarchy level of Switch B.

```
set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/46 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control standby
set ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces vlan unit 500 family inet address 3.3.3.1/24
set vlans v100 vlan-id 100
set vlans v500 vlan-id 500
set vlans v500 l3-interface vlan.500
set protocols iccp local-ip-addr 3.3.3.1
```



```

set protocols iccp peer 3.3.3.2 session-establishment-hold-time 50
set protocols iccp peer 3.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 3.3.3.2 liveness-detection minimum-receive-interval 60
set protocols iccp peer 3.3.3.2 liveness-detection transmit-interval minimum-interval 60
set protocols rstp interface ae0.0 disable
set protocols rstp interface ae1.0 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 3.3.3.2 interface ae0

```

### *Configuring MC-LAG on Two Switches*

#### **Step-by-Step Procedure**

To enable multichassis protection link between MC-LAG peers:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

1. Configure the number of LAGs on both Switch A and Switch B.  

```
[edit chassis]
user@switch# set aggregated-devices ethernet device-count 2
```
2. Add member interfaces to the aggregated Ethernet interfaces on both Switch A and Switch B.

```

[edit interfaces]
user@switch# set xe-0/0/12 ether-options 802.3ad ae0
[edit interfaces]
user@switch# set xe-0/0/13 ether-options 802.3ad ae0
[edit interfaces]
user@switch# set xe-0/0/44 ether-options 802.3ad ae1
[edit interfaces]
user@switch# set xe-0/0/46 ether-options 802.3ad ae1

```

3. Configure a trunk interface between Switch A and Switch B.  

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching port-mode trunk
```
4. Configure a multichassis protection link between Switch A and Switch B.

Switch A:

```

[edit]
user@switch# set multi-chassis multi-chassis-protection 3.3.3.2 interface ae0

```

Switch B:

```

[edit]
user@switch# set multi-chassis multi-chassis-protection 3.3.3.1 interface ae0

```



**Step-by-Step  
Procedure**

To enable ICCP:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

1. Configure the local IP address to be in the ICCP connection on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp local-ip-addr 3.3.3.2
```

Switch B:

```
[edit protocols]
user@switch# set iccp local-ip-addr 3.3.3.1
```

2. Configure the peer IP address and minimum receive interval for a (BFD) session for ICCP on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.1 liveness-detection minimum-receive-interval 60
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.2 liveness-detection minimum-receive-interval 60
```

3. Configure the peer IP address and minimum transmit interval for Bidirectional Forwarding Detection (BFD) session for ICCP on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.1 liveness-detection transmit-interval minimum-interval 60
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.2 liveness-detection transmit-interval minimum-interval 60
```

4. (Optional) Configure the time during which an ICCP connection must succeed between MC-LAG peers on Switch A and Switch B.



**NOTE:** Configuring session establishment hold time helps in faster ICCP connection establishment. The recommended value is 50 seconds.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.1 session-establishment-hold-time 50
```

Switch B:

```
[edit protocols]
```



- user@switch# **set iccp peer 3.3.3.2 session-establishment-hold-time 50**
- (Optional) Configure the backup IP address to be used for backup liveness detection on both Switch A and Switch B.



**NOTE:** By default, backup liveness detection is not enabled. Configuring a backup IP address helps achieve sub-second traffic loss during a MC-LAG peer reboot.

Switch A:

```
[edit protocols]
```

```
user@switch# set iccp peer 3.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
```

Switch B:

```
[edit protocols]
```

```
user@switch# set iccp peer 3.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.232
```

- Configure Layer 3 connectivity between the MC-LAG peers on both Switch A and Switch B.

```
[edit vlans]
```

```
user@switch# set v500 vlan-id 500
```

```
[edit vlans]
```

```
user@switch# set v500 l3-interface vlan.500
```

```
[edit interfaces]
```

```
user@switch# set ae0 unit 0 family ethernet-switching port-mode trunk vlan members v500
```

#### Step-by-Step Procedure

To enable the MC-LAG interface:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

- Enable LACP on the MC-LAG interface on Switch A and Switch B.



**NOTE:** At least one end needs to be active. The other end can be either active or passive.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options lacp active
```

- Specify the same multichassis aggregated Ethernet identification number on both MC-LAG peers on Switch A and Switch B.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae mc-ae-id 3
```

- Specify a unique chassis ID for the MC-LAG on the MC-LAG peers on Switch A and Switch B.

Switch A:

```
[edit interfaces]
```



```
user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 0
```

Switch B:

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 1
```

4. Specify the operating mode of the MC-LAG on both Switch A and Switch B.



**NOTE:** Only active-active mode is supported at this time.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae mode active-active
```

5. Specify the status control for MC-LAG on Switch A and Switch B.



**NOTE:** You must configure status control on both Switch A and Switch B hosting the MC-LAG. If one peer is in active mode, the other must be in standby mode.

Switch A:

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae status-control active
```

Switch B:

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae status-control standby
```

6. Specify the number of seconds by which the bring-up of the MC-AE interface should be deferred after you reboot Switch A and Switch B.



**NOTE:** The recommended value for maximum VLAN configuration (for example, 4,000 VLANs) is 240 seconds. If IGMP snooping is enabled on all of the VLANs, the recommended value is 420 seconds.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae init-delay-time 240
```

7. Specify the same LACP system ID for the MC-LAG on Switch A and Switch B.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options lacp system-ID 00:01:02:03:04:05
```

8. Specify the same LACP administration key on both Switch A and Switch B.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options lacp admin-key 3
```

9. Enable a VLAN on the MC-LAG on Switch A and Switch B.

```
[edit interfaces]
```

```
user@switch# set ae1 unit 0 family ethernet-switching port-mode trunk
```

```
[edit]
```

```
user@switch# set vlans v100 vlan-id 100
```

```
[edit interfaces]
```



```
user@switch# set ae1 unit 0 family ethernet-switching vlan members v100
```

### Step-by-Step Procedure

To enable RSTP:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

1. Enable RSTP globally on all interfaces on Switch A and Switch B.  
[edit]  
user@switch# **set protocols rstp interface all mode point-to-point**
2. Disable RSTP on the ICL-PL interfaces on Switch A and Switch B:  
[edit]  
user@switch# **set protocols rstp interface ae0.0 disable**
3. Configure the MC-LAG interfaces as edge ports on Switch A and Switch B.



**NOTE:** The ae1 interface is a downstream interface. This is why RSTP and bpdv-block-on-edge need to be configured.

[edit]

```
user@switch# set protocols rstp interface ae1.0 edge
```

4. Enable BPDU blocking on all interfaces except for the ICL-PL interfaces on Switch A and Switch B.



**NOTE:** The ae1 interface is a downstream interface. This is why RSTP and bpdv-block-on-edge need to be configured.

[edit]

```
user@switch# set protocols rstp bpdv-block-on-edge
```

### Results

Display the results of the configuration on Switch A.

```
chassis {
  aggregated-devices {
    ethernet {
      device-count 2;
    }
  }
}
interfaces {
  xe-0/0/12 {
    ether-options {
      802.3ad ae0;
    }
  }
  xe-0/0/13 {
    ether-options {
```



```
        802.3ad ae0;
    }
}
xe-0/0/44 {
    ether-options {
        802.3ad ae1;
    }
}
ae0 {
    unit 0 {
        family ethernet-switching {
            port-mode trunk;
            vlan {
                members v500;
            }
        }
    }
}
ae1 {
    aggregated-ether-options {
        lacp {
            active;
            system-id 00:01:02:03:04:05;
            admin-key 3;
        }
        mc-ae {
            mc-ae-id 3;
            chassis-id 0;
            mode active-active;
            status-control active;
            init-delay-time 240
        }
    }
    unit 0 {
        family ethernet-switching {
            port-mode trunk;
            vlan {
                members v100;
            }
        }
    }
}
vlan {
    unit 500 {
        family inet {
            address 3.3.3.2/24;
        }
    }
}
}
protocols {
    iccp {
        local-ip-addr 3.3.3.2;
        peer 3.3.3.1 {
            session-establishment-hold-time 50;
            backup-liveness-detection {
```



Display the results of the configuration on Switch B.

Copyright © 2013, Juniper Networks, Inc.



```
    }
  }
  xe-0/0/46 {
    ether-options {
      802.3ad ae1;
    }
  }
  ae0 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members v500;
        }
      }
    }
  }
  ae1 {
    aggregated-ether-options {
      lacp {
        active;
        system-id 00:01:02:03:04:05;
        admin-key 3;
      }
      mc-ae {
        mc-ae-id 3;
        chassis-id 1;
        mode active-active;
        status-control standby;
        init-delay-time 240
      }
    }
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members v100;
        }
      }
    }
  }
  vlan {
    unit 500 {
      family inet {
        address 3.3.3.1/24;
      }
    }
  }
}
protocols {
  iccp {
    local-ip-addr 3.3.3.1;
    peer 3.3.3.2 {
      session-establishment-hold-time 50;
      backup-liveness-detection {
        backup-peer-ip 10.207.64.233;
      }
    }
  }
}
```



```

    }
    liveness-detection {
        minimum-receive-interval 60;
        transmit-interval {
            minimum-interval 60;
        }
    }
}
}
}
rstp {
    interface ae0.0 {
        disable;
    }
    interface ae1.0 {
        edge;
    }
    interface all {
        mode point-to-point;
    }
    bpdu-block-on-edge;
}
}
multi-chassis {
    multi-chassis-protection 3.3.3.2 {
        interface ae0;
    }
}
}
vlangs {
    v100 {
        vlan-id 100;
    }
    v500 {
        vlan-id 500;
        l3-interface vlan.500;
    }
}
}

```

## Verification

To verify that the MC-LAG group has been created and is working properly, perform these tasks:

- Verifying That ICCP Is Working on Switch A on page 1970
- Verifying That ICCP Is Working on Switch B on page 1970
- Verifying That LACP Is Active on Switch A on page 1970
- Verifying That LACP Is Active on Switch B on page 1970
- Verifying That the MC-AE and ICL-PL Interfaces Are Up on Switch A on page 1971
- Verifying That the MC-AE and ICL-PL Interfaces Are Up on Switch B on page 1971
- Verifying that MAC Learning Is Occurring on Switch A on page 1971
- Verifying that MAC Learning Is Occurring on Switch B on page 1972



**Verifying That ICCP Is Working on Switch A**

**Purpose** Verify that ICCP is running on Switch A.

**Action** [edit]  
user@switch# **show iccp**  
Redundancy Group Information for peer 3.3.3.1  
TCP Connection : Established  
Liveliness Detection : Up  
  
Client Application: MCSNOOPD  
  
Client Application: eswd

**Meaning** This output shows that the TCP connection between the peers hosting the MC-LAG is up, liveness detection is up, and MCSNOOPD and ESWD client applications are running.

**Verifying That ICCP Is Working on Switch B**

**Purpose** Verify that ICCP is running on Switch B.

**Action** **show iccp**  
  
[edit]  
user@switch# **show iccp**  
Redundancy Group Information for peer 3.3.3.2  
TCP Connection : Established  
Liveliness Detection : Up  
  
Client Application: MCSNOOPD  
  
Client Application: eswd

**Meaning** This output shows that the TCP connection between the peers hosting the MC-LAG is up, liveness detection is up, and MCSNOOPD and ESWD client applications are running.

**Verifying That LACP Is Active on Switch A**

**Purpose** Verify that LACP is active on Switch A.

**Action** [edit]  
user@switch# **show lacp interfaces**  
Aggregated interface: ae1  
LACP state:            Role    Exp   Def   Dist   Col   Syn   Aggr   Timeout   Activity  
xe-0/0/46            Actor   No    No    Yes   Yes   Yes   Yes    Fast    Active  
xe-0/0/46            Partner No    No    Yes   Yes   Yes   Yes    Fast    Active  
LACP protocol:            Receive State   Transmit State            Mux State  
xe-0/0/46                    Current    Fast periodic   Collecting distributing

**Meaning** This output shows that Switch A is participating in LACP negotiation.

**Verifying That LACP Is Active on Switch B**

**Purpose** Verify that LACP is active on Switch B



**Action** [edit]  
 user@switch# show lacp interfaces

```

Aggregated interface: ae1
  LACP state:      Role  Exp  Def  Dist  Col  Syn  Aggr  Timeout  Activity
  xe-0/0/44       Actor No   No   Yes  Yes  Yes  Yes   Fast    Active
  xe-0/0/44       Partner No   No   Yes  Yes  Yes  Yes   Fast    Active
  LACP protocol:   Receive State Transmit State Mux State
  xe-0/0/44       Current Fast periodic Collecting distributing
  
```

**Meaning** This output shows that Switch B is participating in LACP negotiation.

#### *Verifying That the MC-AE and ICL-PL Interfaces Are Up on Switch A*

**Purpose** Verify that the MC-AE and ICL-PL interfaces are up on Switch A.

**Action** [edit]  
 user@switch# show interfaces mc-ae

```

Member Link          : ae1
Current State Machine's State: mcae active state
Local Status         : active
Local State          : up
Peer Status          : active
Peer State           : up
  Logical Interface   : ae1.0
  Topology Type       : bridge
  Local State         : up
  Peer State          : up
  Peer Ip/MCP/State   : 3.3.3.1 ae0.0 up
  
```

**Meaning** This output shows that the MC-AE interface on Switch A is up and active.

#### *Verifying That the MC-AE and ICL-PL Interfaces Are Up on Switch B*

**Purpose** Verify that the MC-AE and ICL-PL interfaces are up on Switch B.

**Action** [edit]  
 user@switch# show interfaces mc-ae

```

Member Link          : ae1
Current State Machine's State: mcae active state
Local Status         : active
Local State          : up
Peer Status          : active
Peer State           : up
  Logical Interface   : ae1.0
  Topology Type       : bridge
  Local State         : up
  Peer State          : up
  Peer Ip/MCP/State   : 3.3.3.2 ae0.0 up
  
```

**Meaning** This output shows that the MC-AE interface on Switch B is up and active.

#### *Verifying that MAC Learning Is Occurring on Switch A*

**Purpose** Verify that MAC learning is working on Switch A.



**Action** [edit]  
user@switch# **show ethernet-switching table**  
Ethernet-switching table: 10 entries, 4 learned, 0 persistent entries

VLAN	MAC address	Type	Age	Interfaces
V100	*	Flood	-	All-members
V100	00:10:94:00:00:05	Learn(L)	33	ae0.0 (MCAE)

**Meaning** The output shows four learned MAC addresses entries.

#### *Verifying that MAC Learning Is Occurring on Switch B*

**Purpose** Verify that MAC learning is working on Switch B.

**Action** [edit]  
user@switch# **show ethernet-switching table**  
Ethernet-switching table: 10 entries, 4 learned, 0 persistent entries

VLAN	MAC address	Type	Age	Interfaces
V100	*	Flood	-	All-members
V100	00:10:94:00:00:05	Learn(L)	33	ae0.0 (MCAE)

**Meaning** The output shows four learned MAC addresses entries.

---

### Troubleshooting

#### *Troubleshooting a LAG That Is Down*

**Problem** The **show interfaces terse** command shows that the MC-LAG is **down**

**Solution** Check the following:

- Verify that there is no configuration mismatch.
- Verify that all member ports are up.
- Verify that the MC-LAG is part of family Ethernet switching (Layer 2 LAG).
- Verify that the MC-LAG member is connected to the correct MC-LAG member at the other end.

**Related Documentation**

- [Understanding Multichassis Link Aggregation on page 1931](#)
- [Configuring Multichassis Link Aggregation on page 2036](#)

### Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP

There are two methods for enabling Layer 3 multicast functionality across a multichassis link aggregation group (MC-LAG). You can choose either to configure Virtual Router Redundancy Protocol (VRRP) or synchronize the MAC addresses for the Layer 3 interfaces of the switches participating in the MC-LAG. The procedure to configure VRRP for use in a Layer 3 multicast MC-LAG is included in this example.

- [Requirements on page 1973](#)
- [Overview on page 1973](#)



- [Configuration on page 1975](#)
- [Verification on page 1994](#)

## Requirements

This example uses the following hardware and software components:

- Junos OS Release 12.3 or later for the QFX Series
- Two QFX3500 or QFX3600 switches

Before you configure an MC-LAG for Layer 3 multicast using VRRP, be sure that you understand how to:

- Configure aggregated Ethernet interfaces on a switch. See [“Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch” on page 1950](#).
- Configure the Link Aggregation Control Protocol (LACP) on aggregated Ethernet interfaces on a switch. See [“Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch” on page 1954](#).

## Overview

In this example, you configure two MC-LAGs across two switches, consisting of two aggregated Ethernet interfaces (ae1 and ae2). To support the MC-LAG, create a third aggregated Ethernet interface (ae0) for the interchassis control link-protection link (ICL-PL). Configure a multichassis protection link for the ICL-PL, Interchassis Control Protocol (ICCP) for the peers hosting the MC-LAG, and Layer 3 connectivity between MC-LAG peers.



**NOTE:** Layer 3 connectivity is required for ICCP.

To complete the configuration, enable VRRP by completing the following steps for each MC-LAG:

- Create a routed VLAN interface (RVI)
- Create a VRRP group and assign a virtual IP address that is shared between each switch in the VRRP group
- Enable a member of a VRRP group to accept all packets destined for the virtual IP address if it is the master in the VRRP group
- Configure Layer 3 connectivity between the VRRP groups

## Topology

The topology used in this example consists of two switches hosting two MC-LAGs—ae1 and ae2. The two switches are connected to a multicast source (Server 1) over the MC-LAG ae1, and a multicast receiver (Server 2) over the MC-LAG ae2. [Figure 43 on page 1974](#) shows the topology of this example.



Figure 43: Configuring a Multichassis LAG for Layer 3 Multicast Using VRRP

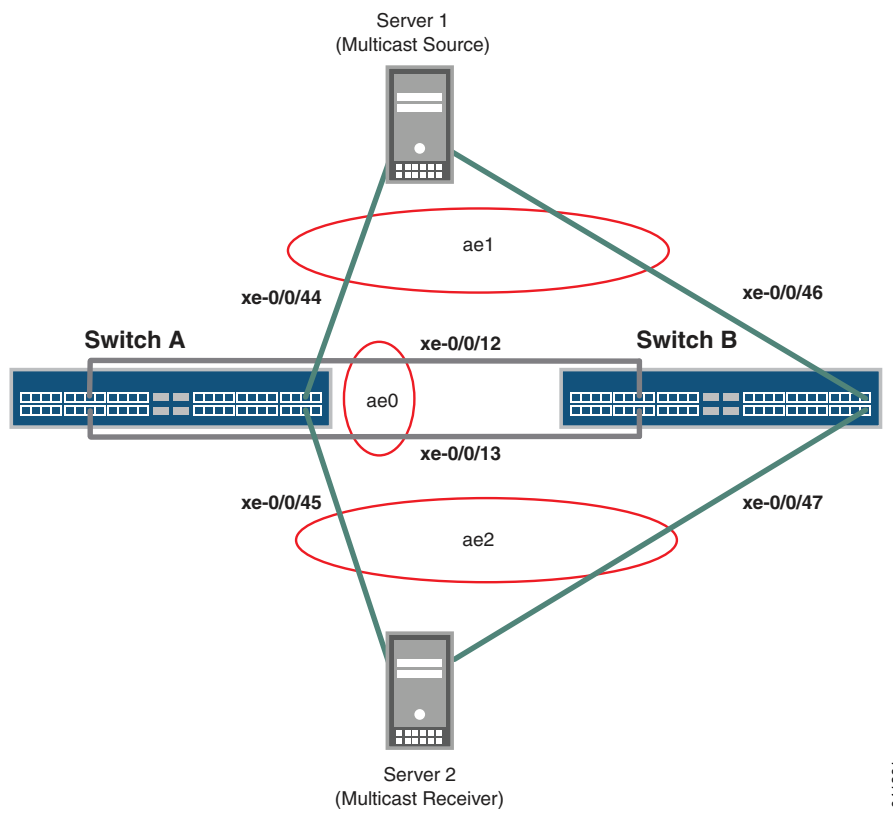


Table 155 on page 1974 details the topology used in this configuration example.

Table 155: Components of the Topology for Configuring a Multichassis LAG for Layer 3 Multicast Using VRRP

Hostname	Base Hardware	Multichassis Link Aggregation Group
Switch A	QFX3500 or QFX3600 switch	<ul style="list-style-type: none"> <li>ae0 is configured as an aggregated Ethernet interface, and is used as an ICL-PL. The following two interfaces are part of ae0:               <ul style="list-style-type: none"> <li>xe-0/0/12 and xe-0/0/13 on Switch A</li> <li>xe-0/0/12 and xe-0/0/13 on Switch B.</li> </ul> </li> <li>ae1 is configured as an MC-LAG for the multicast source (Server 1), and the following two interfaces are part of ae1:               <ul style="list-style-type: none"> <li>xe-0/0/44 on Switch A and</li> <li>xe-0/0/46 on Switch B.</li> </ul> </li> <li>ae2 is configured as an MC-LAG for the multicast receiver (Server 2), and the following two interfaces are part of ae2:               <ul style="list-style-type: none"> <li>xe-0/0/45 on Switch A and</li> <li>xe-0/0/47 on Switch B.</li> </ul> </li> </ul>
Switch B		



## Configuration

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, and paste the commands into the CLI at the **[edit]** hierarchy level of Switch A.

```

set chassis aggregated-devices ethernet device-count 3
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/44 ether-options 802.3ad ae1
set interfaces xe-0/0/45 ether-options 802.3ad ae2
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces ae2 aggregated-ether-options lacp active
set interfaces ae2 aggregated-ether-options lacp system-id 00:01:02:03:04:06
set interfaces ae2 aggregated-ether-options lacp admin-key 3
set interfaces ae2 aggregated-ether-options mc-ae mc-ae-id 4
set interfaces ae2 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae2 aggregated-ether-options mc-ae mode active-active
set interfaces ae2 aggregated-ether-options mc-ae status-control active
set interfaces ae2 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae2 unit 0 family ethernet-switching port-mode trunk
set interfaces ae2 unit 0 family ethernet-switching vlan members v200
set interfaces vlan unit 100 family inet address 10.1.1.11/24 vrrp-group 1 virtual-address
10.1.1.1
set interfaces vlan unit 100 family inet address 10.1.1.11/24 vrrp-group 1 priority 200
set interfaces vlan unit 100 family inet address 10.1.1.11/24 vrrp-group 1 accept-data
set interfaces vlan unit 200 family inet address 10.1.1.21/24 vrrp-group 2 virtual-address
10.1.1.2
set interfaces vlan unit 200 family inet address 10.1.1.21/24 vrrp-group 2 priority 200
set interfaces vlan unit 200 family inet address 10.1.1.21/24 vrrp-group 2 accept-data
set interfaces vlan unit 500 family inet address 3.3.3.2/24
set vlans v100 vlan-id 100
set vlans v100 l3-interface vlan.100
set vlans v200 vlan-id 200
set vlans v200 l3-interface vlan.200
set vlans v500 vlan-id 500
set vlans v500 l3-interface vlan.500
set protocols iccp local-ip-addr 3.3.3.2
set protocols iccp peer 3.3.3.1 session-establishment-hold-time 50
set protocols iccp peer 3.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 3.3.3.1 liveness-detection minimum-receive-interval 60
set protocols iccp peer 3.3.3.1 liveness-detection transmit-interval minimum-interval 60
set protocols igmp-snooping vlan all

```



```
set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection
  minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection transmit-interval
  threshold 500
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection
  minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection transmit-interval
  threshold 500
set protocols pim rp static address 1.0.0.3 group-ranges 239.0.0.0/8
set protocols pim interface vlan.100 priority 200
set protocols pim interface vlan.100 dual-dr
set protocols pim interface vlan.100 bfd-liveness-detection minimum-receive-interval
  700
set protocols pim interface vlan.100 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols pim interface vlan.100 bfd-liveness-detection transmit-interval threshold
  500
set protocols pim interface vlan.200 priority 600
set protocols pim interface vlan.200 dual-dr
set protocols pim interface vlan.200 bfd-liveness-detection minimum-receive-interval
  700
set protocols pim interface vlan.200 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols pim interface vlan.200 bfd-liveness-detection transmit-interval threshold
  500
set protocols rstp interface ae0.0 disable
set protocols rstp interface ae1.0 edge
set protocols rstp interface ae2.0 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 3.3.3.1 interface ae0
```

To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, and paste the commands into the CLI at the **[edit]** hierarchy level of Switch B.

```
set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/46 ether-options 802.3ad ae1
set interfaces xe-0/0/47 ether-options 802.3ad ae2
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control standby
set ae1 aggregated-ether-options mc-ae init-delay-time 240
```



```

set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces ae2 aggregated-ether-options lacp active
set interfaces ae2 aggregated-ether-options lacp system-id 00:01:02:03:04:06
set interfaces ae2 aggregated-ether-options lacp admin-key 3
set interfaces ae2 aggregated-ether-options mc-ae mc-ae-id 4
set interfaces ae2 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae2 aggregated-ether-options mc-ae mode active-active
set interfaces ae2 aggregated-ether-options mc-ae status-control active
set interfaces ae2 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae2 unit 0 family ethernet-switching port-mode trunk
set interfaces ae2 unit 0 family ethernet-switching vlan members v200
set interfaces vlan unit 100 family inet address 10.1.1.10/24 vrrp-group 1 virtual-address
10.1.1.1
set interfaces vlan unit 100 family inet address 10.1.1.10/24 vrrp-group 1 priority 150
set interfaces vlan unit 100 family inet address 10.1.1.10/24 vrrp-group 1 accept-data
set interfaces vlan unit 200 family inet address 10.1.1.20/24 vrrp-group 2 virtual-address
10.1.1.2
set interfaces vlan unit 200 family inet address 10.1.1.20/24 vrrp-group 2 priority 150
set interfaces vlan unit 200 family inet address 10.1.1.20/24 vrrp-group 2 accept-data
set interfaces vlan unit 500 family inet address 3.3.3.1/24
set vlans v100 vlan-id 100
set vlans v100 l3-interface vlan.100
set vlans v200 vlan-id 200
set vlans v200 l3-interface vlan.200
set vlans v500 vlan-id 500
set vlans v500 l3-interface vlan.500
set protocols iccp local-ip-addr 3.3.3.1
set protocols iccp peer 3.3.3.2 session-establishment-hold-time 50
set protocols iccp peer 3.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 3.3.3.2 liveness-detection minimum-receive-interval 60
set protocols iccp peer 3.3.3.2 liveness-detection transmit-interval minimum-interval 60
set protocols igmp-snooping vlan all
set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection
minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection transmit-interval
minimum-interval 350
set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection transmit-interval
threshold 500
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection
minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection transmit-interval
minimum-interval 350
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection transmit-interval
threshold 500
set protocols pim rp static address 1.0.0.3 group-ranges 239.0.0.0/8
set protocols pim interface vlan.100 priority 100
set protocols pim interface vlan.100 dual-dr
set protocols pim interface vlan.100 bfd-liveness-detection minimum-receive-interval
700
set protocols pim interface vlan.100 bfd-liveness-detection transmit-interval
minimum-interval 350
set protocols pim interface vlan.100 bfd-liveness-detection transmit-interval threshold
500
set protocols pim interface vlan.200 priority 500
set protocols pim interface vlan.200 dual-dr

```



```
set protocols pim interface vlan.200 bfd-liveness-detection minimum-receive-interval
  700
set protocols pim interface vlan.200 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols pim interface vlan.200 bfd-liveness-detection transmit-interval threshold
  500
set protocols rstp interface ae0.0 disable
set protocols rstp interface ae1.0 edge
set protocols rstp interface ae2.0 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 3.3.3.2 interface ae0
```

### *Configuring MC-LAG for Layer 3 Multicast Using VRRP on Two Switches*

#### **Step-by-Step Procedure**

To enable multichassis protection link between MC-LAG peers:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

1. Configure the number of LAGs on both Switch A and Switch B.

```
[edit chassis]
user@switch# set aggregated-devices ethernet device-count 3
```

2. Add member interfaces to the aggregated Ethernet interfaces on both Switch A and Switch B.

#### **Switch A and Switch B**

```
[edit interfaces]
user@switch# set xe-0/0/12 ether-options 802.3ad ae0
user@switch# set xe-0/0/13 ether-options 802.3ad ae0
```

#### **Switch A**

```
[edit interfaces]
user@switch# set xe-0/0/44 ether-options 802.3ad ae1
user@switch# set xe-0/0/45 ether-options 802.3ad ae2
```

#### **Switch B**

```
[edit interfaces]
user@switch# set xe-0/0/46 ether-options 802.3ad ae1
user@switch# set xe-0/0/47 ether-options 802.3ad ae2
```

3. Configure ae0 as the trunk interface between Switch A and Switch B.

#### **Switch A and Switch B**

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching port-mode trunk
```

4. Configure ae0 as the multichassis protection link between Switch A and Switch B.

#### **Switch A**

```
[edit]
```



```
user@switch# set multi-chassis multi-chassis-protection 3.3.3.1 interface ae0
```

#### Switch B

```
[edit]
user@switch# set multi-chassis multi-chassis-protection 3.3.3.2 interface ae0
```

#### Step-by-Step Procedure

To enable ICCP:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

1. Configure the local IP address to be in the ICCP connection on Switch A and Switch B.

#### Switch A

```
[edit protocols]
user@switch# set iccp local-ip-addr 3.3.3.2
```

#### Switch B

```
[edit protocols]
user@switch# set iccp local-ip-addr 3.3.3.1
```

2. Configure the peer IP address, minimum receive interval, and minimum transmit interval for a Bidirectional Forwarding Detection (BFD) session for ICCP on Switch A and Switch B.

#### Switch A

```
[edit protocols]
user@switch# set iccp peer 3.3.3.1 liveness-detection minimum-receive-interval 60
user@switch# set iccp peer 3.3.3.1 liveness-detection transmit-interval
minimum-interval 60
```

#### Switch B

```
[edit protocols]
user@switch# set iccp peer 3.3.3.2 liveness-detection minimum-receive-interval
60
user@switch# set iccp peer 3.3.3.2 liveness-detection transmit-interval
minimum-interval 60
```

3. (Optional) Configure the time during which an ICCP connection must succeed between MC-LAG peers on Switch A and Switch B.



**NOTE:** Configuring session establishment hold time helps in faster ICCP connection establishment. The recommended value is 50 seconds.

#### Switch A

```
[edit protocols]
```



```
user@switch# set iccp peer 3.3.3.1 session-establishment-hold-time 50
```

#### Switch B

```
[edit protocols]
```

```
user@switch# set iccp peer 3.3.3.2 session-establishment-hold-time 50
```

4. (Optional) Configure the backup IP address to be used for backup liveness detection on both Switch A and Switch B.



**NOTE:** By default, backup liveness detection is not enabled. Configuring a backup IP address helps achieve sub-second traffic loss during a MC-LAG peer reboot.

#### Switch A

```
[edit protocols]
```

```
user@switch# set iccp peer 3.3.3.1 backup-liveness-detection backup-peer-ip  
10.207.64.233
```

#### Switch B

```
[edit protocols]
```

```
user@switch# set iccp peer 3.3.3.2 backup-liveness-detection backup-peer-ip  
10.207.64.232
```

5. Configure Layer 3 connectivity between the MC-LAG peers on both Switch A and Switch B.

#### Switch A and Switch B

```
[edit vlans]
```

```
user@switch# set v500 vlan-id 500
```

```
user@switch# set v500 l3-interface vlan.500
```

```
[edit interfaces]
```

```
user@switch# set ae0 unit 0 family ethernet-switching vlan members v500
```

#### Switch A

```
[edit interfaces]
```

```
user@switch# set vlan unit 500 family inet address 3.3.3.2/24
```

#### Switch B

```
[edit interfaces]
```

```
user@switch# set vlan unit 500 family inet address 3.3.3.1/24
```



**Step-by-Step Procedure** To enable the ae1 and ae2 MC-LAG interfaces:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

1. Enable LACP on the MC-LAG interfaces on Switch A and Switch B.



**NOTE:** At least one end needs to be active. The other end can be either active or passive.

[edit interfaces]

```
user@switch# set ae1 aggregated-ether-options lacp active
```

```
user@switch# set ae2 aggregated-ether-options lacp active
```

2. Specify the same multichassis aggregated Ethernet (MC-AE) identification number for each MC-LAG peer on Switch A and Switch B.

[edit interfaces]

```
user@switch# set ae1 aggregated-ether-options mc-ae mc-ae-id 3
```

```
user@switch# set ae2 aggregated-ether-options mc-ae mc-ae-id 4
```

3. Specify a unique chassis ID for the MC-LAG on the MC-LAG peers on Switch A and Switch B.

#### Switch A

[edit interfaces]

```
user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 0
```

```
user@switch# set ae2 aggregated-ether-options mc-ae chassis-id 0
```

#### Switch B

[edit interfaces]

```
user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 1
```

```
user@switch# set ae2 aggregated-ether-options mc-ae chassis-id 1
```

4. Specify the operating mode of the MC-LAGs on both Switch A and Switch B.



**NOTE:** Only active-active mode is supported at this time.

[edit interfaces]

```
user@switch# set ae1 aggregated-ether-options mc-ae mode active-active
```

```
user@switch# set ae2 aggregated-ether-options mc-ae mode active-active
```

5. Specify the status control for the MC-LAGs on Switch A and Switch B.



**NOTE:** You must configure status control on both Switch A and Switch B hosting the MC-LAGs. If one peer is in active mode, the other must be in standby mode.



**Switch A**

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae status-control active
user@switch# set ae2 aggregated-ether-options mc-ae status-control active
```

**Switch B**

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae status-control standby
user@switch# set ae2 aggregated-ether-options mc-ae status-control standby
```

6. Specify the number of seconds by which the bring-up of the MC-LAG interfaces should be deferred after you reboot Switch A or Switch B.



**NOTE:** The recommended value for maximum VLAN configuration (for example, 4,000 VLANs) is 240 seconds. If IGMP snooping is enabled on all of the VLANs, the recommended value is 420 seconds.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae init-delay-time 420
user@switch# set ae2 aggregated-ether-options mc-ae init-delay-time 420
```

7. Specify the same LACP system ID for each MC-LAG on Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp system-ID 00:01:02:03:04:05
user@switch# set ae2 aggregated-ether-options lacp system-ID 00:01:02:03:04:06
```

8. Specify the same LACP administration key on both Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp admin-key 3
user@switch# set ae2 aggregated-ether-options lacp admin-key 3
```

9. Enable a VLAN for each MC-LAG on Switch A and Switch B.

```
[edit vlans]
user@switch# set v100 vlan-id 100
user@switch# set v200 vlan-id 200
```

```
[edit interfaces]
user@switch# set ae1 unit 0 family ethernet-switching vlan members v100
user@switch# set ae2 unit 0 family ethernet-switching vlan members v200
```

10. Configure ae1 and ae2 as trunk interfaces between Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 unit 0 family ethernet-switching port-mode trunk
user@switch# set ae2 unit 0 family ethernet-switching port-mode trunk
```

**Step-by-Step Procedure**

To enable VRRP on the MC-LAGs on Switch A and Switch B:

1. Create a routed VLAN interface (RVI) for each MC-LAG, assign a virtual IP address that is shared between each switch in the VRRP groups, and assign an individual IP address for each switch in the VRRP groups.



**Switch A**

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.11/24 vrrp-group 1
virtual-address 10.1.1.1
user@switch# set vlan unit 200 family inet address 10.1.1.21/24 vrrp-group 2
virtual-address 10.1.1.2
```

**Switch B**

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.10/24 vrrp-group 1
virtual-address 10.1.1.1
user@switch# set vlan unit 200 family inet address 10.1.1.20/24 vrrp-group 2
virtual-address 10.1.1.2
```

2. Assign the priority for each switch in the VRRP groups:



**NOTE:** The switch configured with the highest priority is the master.

**Switch A**

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.11/24 vrrp-group 1 priority
200
user@switch# set vlan unit 200 family inet address 10.1.1.21/24 vrrp-group 2 priority
200
```

**Switch B**

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.10/24 vrrp-group 1 priority
150
user@switch# set vlan unit 200 family inet address 10.1.1.20/24 vrrp-group 2 priority
150
```

3. Enable the switch to accept all packets destined for the virtual IP address if it is the master in a VRRP group:

**Switch A**

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.11/24 vrrp-group 1
accept-data
user@switch# set vlan unit 200 family inet address 10.1.1.21/24 vrrp-group 2
accept-data
```

**Switch B**

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.10/24 vrrp-group 1
accept-data
user@switch# set vlan unit 200 family inet address 10.1.1.20/24 vrrp-group 2
accept-data
```

4. Configure Layer 3 connectivity between Switch A and Switch B.



```
[edit interfaces]
user@switch# set v100 l3-interface vlan.100
user@switch# set v200 l3-interface vlan.200
```

**Step-by-Step  
Procedure**

To enable IGMP snooping:

1. Enable IGMP snooping for all VLANs on Switch A and Switch B.

```
[edit protocols]
user@switch# set igmp-snooping vlan all
```

**Step-by-Step  
Procedure**

To configure OSPF as the Layer 3 protocol:

1. Configure an OSPF area on Switch A and Switch B.

```
[edit protocols ospf]
user@switch# set area 0.0.0.0
```

2. Assign the VLAN interfaces for the MC-LAGs as interfaces to the OSPF area on Switch A and Switch B.

```
[edit protocols ospf area 0.0.0.0]
user@switch# set interface vlan.100
user@switch# set interface vlan.200
```

3. Configure the minimum receive interval, minimum transmit interval, and transmit interval threshold for a Bidirectional Forwarding Detection (BFD) session for the OSPF interfaces on Switch A and Switch B.

```
[edit protocols ospf area 0.0.0.0]
user@switch# set interface vlan.100 bfd-liveness-detection
  minimum-receive-interval 700
user@switch# set interface vlan.100 bfd-liveness-detection transmit-interval
  minimum-interval 350
user@switch# set interface vlan.100 bfd-liveness-detection transmit-interval
  threshold 500
user@switch# set interface vlan.200 bfd-liveness-detection
  minimum-receive-interval 700
user@switch# set interface vlan.200 bfd-liveness-detection transmit-interval
  minimum-interval 350
user@switch# set interface vlan.200 bfd-liveness-detection transmit-interval
  threshold 500
```

**Step-by-Step  
Procedure**

To configure PIM as the multicast protocol:

1. Configure a static rendezvous point (RP) address on Switch A and Switch B.

```
[edit protocols pim]
user@switch# set rp static address 1.0.0.3
```

2. Configure the address ranges of the multicast groups for which Switch A and Switch B can be a rendezvous point (RP).

```
[edit protocols pim rp static address 1.0.0.3]
user@switch# set group-ranges 239.0.0.0/8
```

3. Enable PIM on the VLAN interfaces for the MC-LAGs on Switch A and Switch B.



```
[edit protocols pim]
user@switch# set interface vlan.100 dual-dr
user@switch# set interface vlan.200 dual-dr
```

4. Configure each PIM interface's priority for being selected as the designated router (DR).

An interface with a higher priority value has a higher probability of being selected as the DR.

#### Switch A

```
[edit protocols pim]
user@switch# set interface vlan.100 priority 200
user@switch# set interface vlan.200 priority 600
```

#### Switch B

```
[edit protocols pim]
user@switch# set interface vlan.100 priority 100
user@switch# set interface vlan.200 priority 500
```

5. Configure the minimum receive interval, minimum transmit interval, and transmit interval threshold for a Bidirectional Forwarding Detection (BFD) session for the PIM interfaces on Switch A and Switch B.

```
[edit protocols pim]
user@switch# set interface vlan.100 bfd-liveness-detection
  minimum-receive-interval 700
user@switch# set interface vlan.100 bfd-liveness-detection transmit-interval
  minimum-interval 350
user@switch# set interface vlan.100 bfd-liveness-detection transmit-interval
  threshold 500
user@switch# set interface vlan.200 bfd-liveness-detection
  minimum-receive-interval 700
user@switch# set interface vlan.200 bfd-liveness-detection transmit-interval
  minimum-interval 350
user@switch# set interface vlan.200 bfd-liveness-detection transmit-interval
  threshold 500
```

#### Step-by-Step Procedure

To enable RSTP:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

1. Enable RSTP globally on all interfaces on Switch A and Switch B.

```
[edit protocols rstp]
user@switch# set interface all mode point-to-point
```

2. Disable RSTP on the ICL-PL interfaces on Switch A and Switch B.

```
[edit protocols rstp]
user@switch# set interface ae0.0 disable
```

3. Configure the MC-LAG interfaces as edge ports on Switch A and Switch B.





**NOTE:** The ae1 and ae2 interfaces are downstream interfaces. This is why RSTP and bpd-block-on-edge need to be configured.

[edit protocols rstp]

user@switch# set interface ae1.0 edge

user@switch# set interface ae2.0 edge

4. Enable BPDU blocking on all interfaces except for the ICL-PL interfaces on Switch A and Switch B.



**NOTE:** The ae1 and ae2 interfaces are downstream interfaces. This is why RSTP and bpd-block-on-edge need to be configured.

[edit protocols rstp]

user@switch# set bpd-block-on-edge

### Results

From configuration mode on Switch A, confirm your configuration by entering the **show chassis**, **show interfaces**, **show multi-chassis**, **show protocols**, and **show vlans** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
chassis {
  aggregated-devices {
    ethernet {
      device-count 3;
    }
  }
}
interfaces {
  xe-0/0/12 {
    ether-options {
      802.3ad ae0;
    }
  }
  xe-0/0/13 {
    ether-options {
      802.3ad ae0;
    }
  }
  xe-0/0/44 {
    ether-options {
      802.3ad ae1;
    }
  }
  xe-0/0/45 {
    ether-options {
      802.3ad ae2;
    }
  }
}
```



```
    }
  }
  ae0 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members v500;
        }
      }
    }
  }
  ae1 {
    aggregated-ether-options {
      lacp {
        active;
        system-id 00:01:02:03:04:05;
        admin-key 3;
      }
      mc-ae {
        mc-ae-id 3;
        chassis-id 0;
        mode active-active;
        status-control active;
        init-delay-time 240;
      }
    }
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members v100;
        }
      }
    }
  }
  ae2 {
    aggregated-ether-options {
      lacp {
        active;
        system-id 00:01:02:03:04:06;
        admin-key 3;
      }
      mc-ae {
        mc-ae-id 4;
        chassis-id 0;
        mode active-active;
        status-control active;
        init-delay-time 240;
      }
    }
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members v200;
        }
      }
    }
  }
}
```



```
    }
  }
}
vlan {
  unit 100 {
    family inet {
      address 10.1.1.11/24 {
        vrrp-group 1 {
          virtual-address 10.1.1.1;
          priority 200;
          accept-data;
        }
      }
    }
  }
  unit 200 {
    family inet {
      address 10.1.1.21/24 {
        vrrp-group 2 {
          virtual-address 10.1.1.2;
          priority 200;
          accept-data;
        }
      }
    }
  }
  unit 500 {
    family inet {
      address 3.3.3.2/24;
    }
  }
}
protocols {
  ospf {
    area 0.0.0.0 {
      interface vlan.100 {
        bfd-liveness-detection {
          minimum-receive-interval 700;
          transmit-interval {
            minimum-interval 350;
            threshold 500;
          }
        }
      }
      interface vlan.200 {
        bfd-liveness-detection {
          minimum-receive-interval 700;
          transmit-interval {
            minimum-interval 350;
            threshold 500;
          }
        }
      }
    }
  }
}
```



```

}
pim {
  rp {
    static {
      address 1.0.0.3 {
        group-ranges {
          239.0.0.0/8;
        }
      }
    }
  }
}
interface vlan.100 {
  priority 200;
  dual-dr;
  bfd-liveness-detection { ## Warning: 'bfd-liveness-detection' is deprecated
    minimum-receive-interval 700;
    transmit-interval {
      minimum-interval 350;
      threshold 500;
    }
  }
}
interface vlan.200 {
  priority 600;
  dual-dr;
  bfd-liveness-detection { ## Warning: 'bfd-liveness-detection' is deprecated
    minimum-receive-interval 700;
    transmit-interval {
      minimum-interval 350;
      threshold 500;
    }
  }
}
}
iccp {
  local-ip-addr 3.3.3.2;
  peer 3.3.3.1 {
    session-establishment-hold-time 50;
    backup-liveness-detection {
      backup-peer-ip 10.207.64.233;
    }
    liveness-detection {
      minimum-receive-interval 60;
      transmit-interval {
        minimum-interval 60;
      }
    }
  }
}
igmp-snooping {
  vlan all;
}
rstp {
  interface ae0.0 {
    disable;
  }
}

```



```
        interface ae1.0 {
            edge;
        }
        interface ae2.0 {
            edge;
        }
        interface all {
            mode point-to-point;
        }
        bpdu-block-on-edge;
    }
}
multi-chassis {
    multi-chassis-protection 3.3.3.1 {
        interface ae0;
    }
}
vlands {
    v100 {
        vlan-id 100;
        l3-interface vlan.100;
    }
    v200 {
        vlan-id 200;
        l3-interface vlan.200;
    }
    v500 {
        vlan-id 500;
        l3-interface vlan.500;
    }
}
```

From configuration mode on Switch B, confirm your configuration by entering the **show chassis**, **show interfaces**, **show multi-chassis**, **show protocols**, and **show vlans** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
chassis {
    aggregated-devices {
        ethernet {
            device-count 3;
        }
    }
}
interfaces {
    xe-0/0/12 {
        ether-options {
            802.3ad ae0;
        }
    }
    xe-0/0/13 {
        ether-options {
            802.3ad ae0;
        }
    }
    xe-0/0/46 {
```



```

        ether-options {
            802.3ad ae1;
        }
    }
    xe-0/0/47 {
        ether-options {
            802.3ad ae2;
        }
    }
    ae0 {
        unit 0 {
            family ethernet-switching {
                port-mode trunk;
                vlan {
                    members v500;
                }
            }
        }
    }
    ae1 {
        aggregated-ether-options {
            lacp {
                active;
                system-id 00:01:02:03:04:05;
                admin-key 3;
            }
            mc-ae {
                mc-ae-id 3;
                chassis-id 1;
                mode active-active;
                status-control standby;
            }
        }
        unit 0 {
            family ethernet-switching {
                port-mode trunk;
                vlan {
                    members v100;
                }
            }
        }
    }
    ae2 {
        aggregated-ether-options {
            lacp {
                active;
                system-id 00:01:02:03:04:06;
                admin-key 3;
            }
            mc-ae {
                mc-ae-id 4;
                chassis-id 1;
                mode active-active;
                status-control active;
                init-delay-time 240;
            }
        }
    }

```



```
}
unit 0 {
  family ethernet-switching {
    port-mode trunk;
    vlan {
      members v200;
    }
  }
}
}
vlan {
  unit 100 {
    family inet {
      address 10.1.1.10/24 {
        vrrp-group 1 {
          virtual-address 10.1.1.1;
          priority 150;
          accept-data;
        }
      }
    }
  }
  unit 200 {
    family inet {
      address 10.1.1.20/24 {
        vrrp-group 2 {
          virtual-address 10.1.1.2;
          priority 150;
          accept-data;
        }
      }
    }
  }
  unit 500 {
    family inet {
      address 3.3.3.1/24;
    }
  }
}
}
protocols {
  ospf {
    area 0.0.0.0 {
      interface vlan.100 {
        bfd-liveness-detection {
          minimum-receive-interval 700;
          transmit-interval {
            minimum-interval 350;
            threshold 500;
          }
        }
      }
    }
  }
  interface vlan.200 {
    bfd-liveness-detection {
      minimum-receive-interval 700;
      transmit-interval {
```



```

        minimum-interval 350;
        threshold 500;
    }
}
}
pim {
    rp {
        static {
            address 1.0.0.3 {
                group-ranges {
                    239.0.0.0/8;
                }
            }
        }
    }
}
interface vlan.100 {
    priority 100;
    dual-dr;
    bfd-liveness-detection { ## Warning: 'bfd-liveness-detection' is deprecated
        minimum-receive-interval 700;
        transmit-interval {
            minimum-interval 350;
            threshold 500;
        }
    }
}
interface vlan.200 {
    priority 500;
    dual-dr;
    bfd-liveness-detection { ## Warning: 'bfd-liveness-detection' is deprecated
        minimum-receive-interval 700;
        transmit-interval {
            minimum-interval 350;
            threshold 500;
        }
    }
}
}
iccp {
    local-ip-addr 3.3.3.1;
    peer 3.3.3.2 {
        session-establishment-hold-time 50;
        backup-liveness-detection {
            backup-peer-ip 10.207.64.233;
        }
        liveness-detection {
            minimum-receive-interval 60;
            transmit-interval {
                minimum-interval 60;
            }
        }
    }
}
}
igmp-snooping {

```



```
    vlan all;
  }
  rstp {
    interface ae0.0 {
      disable;
    }
    interface ae1.0 {
      edge;
    }
    interface ae2.0 {
      edge;
    }
    interface all {
      mode point-to-point;
    }
    bpdu-block-on-edge;
  }
}
multi-chassis {
  multi-chassis-protection 3.3.3.2 {
    interface ae0;
  }
}
vlands {
  v100 {
    vlan-id 100;
    l3-interface vlan.100;
  }
  v200 {
    vlan-id 200;
    l3-interface vlan.200;
  }
  v500 {
    vlan-id 500;
    l3-interface vlan.500;
  }
}
```

---

## Verification

To verify that the MC-LAG group has been created and is working properly, perform these tasks:

- [Verifying That Switch A is the Master Designated Router on page 1994](#)
- [Verifying That Switch B is the Backup Designated Router on page 1995](#)

### ***Verifying That Switch A is the Master Designated Router***

**Purpose** Verify that Switch A is the master designated router (DR).

**Action** From operational mode, enter the `show pim interfaces` command.

```
user@switch> show pim interfaces
Stat = Status, V = Version, NbrCnt = Neighbor Count,
S = Sparse, D = Dense, B = Bidirectional,
DR = Designated Router, P2P = Point-to-point link,
```



Active = Bidirectional is active, NotCap = Not Bidirectional Capable

Name	Stat	Mode	IP	V	State	NbrCnt	JoinCnt(sg/*g)	DR	address
p1me.32769	Down	S	4	2	P2P,NotCap	0	0/0		
vlan.100	Up	S	4	2	DDR-DR,NotCap	1	0/0		10.1.1.11
vlan.200	Up	S	4	2	DDR-DR,NotCap	2	0/0		10.1.1.21

**Meaning** The DDR-DR state of the VLAN interfaces in the output shows that Switch A is the master designated router.

### *Verifying That Switch B is the Backup Designated Router*

**Purpose** Verify that Switch B is the backup designated router (BDR).

**Action** From operational mode, enter the [show pim interfaces](#) command.

```
user@switch> show pim interfaces
Stat = Status, V = Version, NbrCnt = Neighbor Count,
S = Sparse, D = Dense, B = Bidirectional,
DR = Designated Router, P2P = Point-to-point link,
Active = Bidirectional is active, NotCap = Not Bidirectional Capable
```

Name	Stat	Mode	IP	V	State	NbrCnt	JoinCnt(sg/*g)	DR	address
p1me.32769	Down	S	4	2	P2P,NotCap	0	0/0		
vlan.100	Up	S	4	2	DDR-BDR,NotCap	1	0/0		10.1.1.11
vlan.200	Up	S	4	2	DDR-BDR,NotCap	2	0/0		10.1.1.21

**Meaning** The DDR-BDR state of the VLAN interfaces in the output shows that Switch B is the backup designated router.

- Related Documentation**
- [Understanding Multichassis Link Aggregation on page 1931](#)
  - [Configuring Multichassis Link Aggregation on page 2036](#)

## Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast using MAC Address Synchronization

There are two methods for enabling Layer 3 unicast functionality across a multichassis link aggregation group (MC-LAG). You can choose either to synchronize the MAC addresses for the Layer 3 interfaces of the switches participating in the MC-LAG, or you can configure Virtual Router Redundancy Protocol (VRRP). The procedure to configure MAC address synchronization is included in this example. For more information on configuring VRRP for use in a Layer 3 unicast MC-LAG, see [“Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using Virtual Router Redundancy Protocol \(VRRP\)” on page 2011](#).

- [Requirements on page 1996](#)
- [Overview on page 1996](#)
- [Configuration on page 1997](#)
- [Verification on page 2008](#)
- [Troubleshooting on page 2010](#)



## Requirements

---

This example uses the following hardware and software components:

- Junos OS Release 12.3 or later for the QFX Series
- Two QFX3500 or QFX3600 switches

Before you configure an MC-LAG for Layer 3 unicast, be sure that you understand how to:

- Configure aggregated Ethernet interfaces on a switch. See [“Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch” on page 1950](#).
- Configure the Link Aggregation Control Protocol (LACP) on aggregated Ethernet interfaces on a switch. See [“Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch” on page 1954](#).
- Configure a standard MC-LAG between switches. See [“Example: Configuring Multichassis Link Aggregation” on page 1958](#).

## Overview

---

In this example, you configure an MC-LAG across two switches by including interfaces from both switches in an aggregated Ethernet interface (ae1). To support the MC-LAG, create a second aggregated Ethernet interface (ae0) for the interchassis control link-protection link (ICL-PL). Configure a multichassis protection link for the ICL-PL, Interchassis Control Protocol (ICCP) for the peers hosting the MC-LAG, and Layer 3 connectivity between MC-LAG peers.



**NOTE:** Layer 3 connectivity is required for ICCP.

---

To complete the configuration, configure MAC address synchronization between the peers and specify the same IP address on both Layer 3 interface members (also known as the routed VLAN interface [RVI] or the integrated routing and bridging (IRB) interface) in the MC-LAG VLAN.

## Topology

The topology used in this example consists of two switches hosting an MC-LAG. The two switches are connected to a server. [Figure 44 on page 1997](#) shows the topology of this example.



Figure 44: Configuring a Multichassis LAG Between Switch A and Switch B

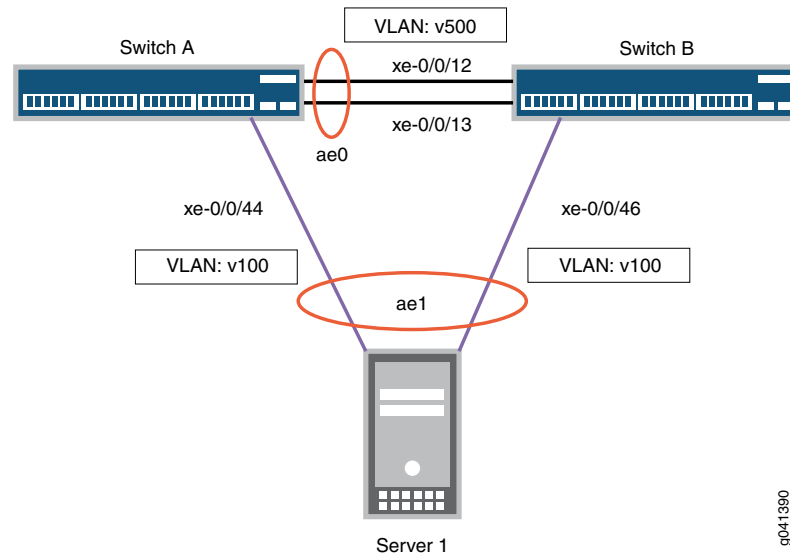


Table 153 on page 1951 details the topology used in this configuration example.

Table 156: Components of the Topology for Configuring a Multichassis LAG Between Two Switches

Hostname	Base Hardware	Multichassis Link Aggregation Group
Switch A	QFX3500 switch or QFX3600 switch	<b>ae0</b> is configured as an aggregated Ethernet interface, and is used as an ICL-PL. The following interfaces are part of <b>ae0</b> : <b>xe-0/0/12</b> and <b>xe-0/0/13</b> on Switch A and <b>xe-0/0/12</b> and <b>xe-0/0/13</b> on Switch B. These interfaces are included in VLAN v500.  <b>ae1</b> is configured as an MC-LAG, and the following two interfaces are part of <b>ae1</b> : <b>xe-0/0/44</b> on Switch A and <b>xe-0/0/46</b> on Switch B. These interfaces are included in VLAN v100.
Switch B	QFX3500 switch or QFX3600 switch	

### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, and paste the commands into the CLI at the **[edit]** hierarchy level of Switch A.

```

set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/44 ether-options 802.3ad ae1

```



```
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae1 aggregated-ether-options lACP active
set interfaces ae1 aggregated-ether-options lACP system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lACP admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces vlan unit 100 family inet address 100.1.1.10
set interfaces vlan unit 500 family inet address 3.3.3.2/24
set vlans v100 vlan-id 100
set vlans v100 l3-interface vlan.100
set vlans v100 mcae-mac-synchronize
set vlans v500 vlan-id 500
set vlans v500 l3-interface vlan.500
set protocols iccp local-ip-addr 3.3.3.2
set protocols iccp peer 3.3.3.1 session-establishment-hold-time 50
set protocols iccp peer 3.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 3.3.3.1 liveness-detection minimum-receive-interval 60
set protocols iccp peer 3.3.3.1 liveness-detection transmit-interval minimum-interval 60
set protocols rstp interface ae0.0 disable
set protocols rstp interface ae1.0 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 3.3.3.1 interface ae0
```

To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, and paste the commands into the CLI at the **[edit]** hierarchy level of Switch B.

```
set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/46 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae1 aggregated-ether-options lACP active
set interfaces ae1 aggregated-ether-options lACP system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lACP admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control standby
set ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces vlan unit 100 family inet address 100.1.1.10
set interfaces vlan unit 500 family inet address 3.3.3.1/24
set vlans v100 vlan-id 100
set vlans v100 l3-interface vlan.100
set vlans v100 mcae-mac-synchronize
set vlans v500 vlan-id 500
set vlans v500 l3-interface vlan.500
set protocols iccp local-ip-addr 3.3.3.1
set protocols iccp peer 3.3.3.2 session-establishment-hold-time 50
```



```

set protocols iccp peer 3.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 3.3.3.2 liveness-detection minimum-receive-interval 60
set protocols iccp peer 3.3.3.2 liveness-detection transmit-interval minimum-interval 60
set protocols rstp interface ae0.0 disable
set protocols rstp interface ae1.0 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 3.3.3.2 interface ae0

```

### Configuring MC-LAG on Two Switches

#### Step-by-Step Procedure

To enable multichassis protection link between MC-LAG peers:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

1. Configure the number of LAGs on both Switch A and Switch B.  

```

[edit chassis]
user@switch# set aggregated-devices ethernet device-count 2

```
2. Add member interfaces to the aggregated Ethernet interfaces on both Switch A and Switch B.

```

[edit interfaces]
user@switch# set xe-0/0/12 ether-options 802.3ad ae0
[edit interfaces]
user@switch# set xe-0/0/13 ether-options 802.3ad ae0
[edit interfaces]
user@switch# set xe-0/0/44 ether-options 802.3ad ae1
[edit interfaces]
user@switch# set xe-0/0/46 ether-options 802.3ad ae1

```

3. Configure a trunk interface between Switch A and Switch B.  

```

[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching port-mode trunk

```
4. Configure a multichassis protection link between Switch A and Switch B.

Switch A:

```

[edit]
user@switch# set multi-chassis multi-chassis-protection 3.3.3.2 interface ae0

```

Switch B:

```

[edit]
user@switch# set multi-chassis multi-chassis-protection 3.3.3.1 interface ae0

```



**Step-by-Step  
Procedure**

To enable ICCP:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

1. Configure the local IP address to be in the ICCP connection on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp local-ip-addr 3.3.3.2
```

Switch B:

```
[edit protocols]
user@switch# set iccp local-ip-addr 3.3.3.1
```

2. Configure the peer IP address and minimum receive interval for a (BFD) session for ICCP on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.1 liveness-detection minimum-receive-interval 60
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.2 liveness-detection minimum-receive-interval 60
```

3. Configure the peer IP address and minimum transmit interval for Bidirectional Forwarding Detection (BFD) session for ICCP on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.1 liveness-detection transmit-interval minimum-interval 60
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.2 liveness-detection transmit-interval minimum-interval 60
```

4. (Optional) Configure the time during which an ICCP connection must succeed between MC-LAG peers on Switch A and Switch B.



**NOTE:** Configuring session establishment hold time helps in faster ICCP connection establishment. The recommended value is 50 seconds.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.1 session-establishment-hold-time 50
```

Switch B:

```
[edit protocols]
```



```
user@switch# set iccp peer 3.3.3.2 session-establishment-hold-time 50
```

5. (Optional) Configure the backup IP address to be used for backup liveness detection on both Switch A and Switch B.



**NOTE:** By default, backup liveness detection is not enabled. Configuring a backup IP address helps achieve sub-second traffic loss during a MC-LAG peer reboot.

Switch A:

```
[edit protocols]
```

```
user@switch# set iccp peer 3.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
```

Switch B:

```
[edit protocols]
```

```
user@switch# set iccp peer 3.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.232
```

6. Configure Layer 3 connectivity across the ae0 ICCP link by adding a Layer 3 interface on both Switch A and Switch B.

```
[edit vlans]
```

```
user@switch# set v500 vlan-id 500
```

```
[edit vlans]
```

```
user@switch# set v500 l3-interface vlan.500
```

```
[edit interfaces]
```

```
user@switch# set ae0 unit 0 family ethernet-switching port-mode trunk vlan members v500
```

#### Step-by-Step Procedure

To enable the MC-LAG interface:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

1. Enable LACP on the MC-LAG interface on Switch A and Switch B.



**NOTE:** At least one end needs to be active. The other end can be either active or passive.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options lacp active
```

2. Specify the same multichassis aggregated Ethernet identification number on both MC-LAG peers on Switch A and Switch B.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae mc-ae-id 3
```

3. Specify a unique chassis ID for the MC-LAG on the MC-LAG peers on Switch A and Switch B.

Switch A:

```
[edit interfaces]
```



```
user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 0
```

Switch B:

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 1
```

4. Specify the operating mode of the MC-LAG on both Switch A and Switch B.



**NOTE:** Only active-active mode is supported at this time.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae mode active-active
```

5. Specify the status control for MC-LAG on Switch A and Switch B.



**NOTE:** You must configure status control on both Switch A and Switch B hosting the MC-LAG. If one peer is in active mode, the other must be in standby mode.

Switch A:

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae status-control active
```

Switch B:

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae status-control standby
```

6. Specify the number of seconds by which the bring-up of the MC-AE interface should be deferred after you reboot Switch A and Switch B.



**NOTE:** The recommended value for maximum VLAN configuration (for example, 4,000 VLANs) is 240 seconds. If IGMP snooping is enabled on all of the VLANs, the recommended value is 420 seconds.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae init-delay-time 240
```

7. Specify the same LACP system ID for the MC-LAG on Switch A and Switch B.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options lacp system-ID 00:01:02:03:04:05
```

8. Specify the same LACP administration key on both Switch A and Switch B.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options lacp admin-key 3
```

9. Enable a VLAN on the MC-LAG on Switch A and Switch B.

```
[edit interfaces]
```

```
user@switch# set ae1 unit 0 family ethernet-switching port-mode trunk
```

```
[edit]
```

```
user@switch# set vlans v100 vlan-id 100
```

```
[edit interfaces]
```



- ```
user@switch# set ae1 unit 0 family ethernet-switching vlan members v100
```
10. Create a Layer 3 interface for the MC-LAG VLAN and assign the same IP address on both Switch A and Switch B.
 

```
[edit]
user@switch# set vlans v100 l3-interface vlan.100
[edit interfaces]
user@switch# set vlan unit 100 family inet address 100.1.1.10
```
  11. Configure MAC address synchronization in the MC-LAG VLAN on both Switch A and Switch B.
 

```
[edit]
user@switch# set vlans v100 mcae-mac-synchronize
```

### Step-by-Step Procedure

To enable RSTP:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

1. Enable RSTP globally on all interfaces on Switch A and Switch B.
 

```
[edit]
user@switch# set protocols rstp interface all mode point-to-point
```
2. Disable RSTP on the ICL-PL interfaces on Switch A and Switch B:
 

```
[edit]
user@switch# set protocols rstp interface ae0.0 disable
```
3. Configure the MC-LAG interfaces as edge ports on Switch A and Switch B.



**NOTE:** The ae1 interface is a downstream interface. This is why RSTP and bpdv-block-on-edge need to be configured.

- ```
[edit]
user@switch# set protocols rstp interface ae1.0 edge
```
4. Enable BPDU blocking on all interfaces except for the ICL-PL interfaces on Switch A and Switch B.



**NOTE:** The ae1 interface is a downstream interface. This is why RSTP and bpdv-block-on-edge need to be configured.

```
[edit]
user@switch# set protocols rstp bpdv-block-on-edge
```

### Results

Display the results of the configuration on Switch A.

```
chassis {
  aggregated-devices {
    ethernet {
      device-count 2;
```



```
    }
  }
}
interfaces {
  xe-0/0/12 {
    ether-options {
      802.3ad ae0;
    }
  }
  xe-0/0/13 {
    ether-options {
      802.3ad ae0;
    }
  }
  xe-0/0/44 {
    ether-options {
      802.3ad ae1;
    }
  }
  ae0 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members v500;
        }
      }
    }
  }
  ae1 {
    aggregated-ether-options {
      lacp {
        active;
        system-id 00:01:02:03:04:05;
        admin-key 3;
      }
      mc-ae {
        mc-ae-id 3;
        chassis-id 0;
        mode active-active;
        status-control active;
        init-delay-time 240
      }
    }
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members v100;
        }
      }
    }
  }
  vlan {
    unit 100 {
      family inet {
```



```

        address 100.1.1.10/32;
    }
}
unit 500 {
    family inet {
        address 3.3.3.2/24;
    }
}
}
}
protocols {
    iccp {
        local-ip-addr 3.3.3.2;
        peer 3.3.3.1 {
            session-establishment-hold-time 50;
            backup-liveness-detection {
                backup-peer-ip 10.207.64.233;
            }
            liveness-detection {
                minimum-receive-interval 60;
                transmit-interval {
                    minimum-interval 60;
                }
            }
        }
    }
}
}
rstp {
    interface ae0.0 {
        disable;
    }
    interface ae1.0 {
        edge;
    }
    interface all {
        mode point-to-point;
    }
    bpdu-block-on-edge;
}
}
multi-chassis {
    multi-chassis-protection 3.3.3.1 {
        interface ae0;
    }
}
}
vllans {
    v100 {
        vlan-id 100;
        l3-interface vllan.100;
        mcae-mac-synchronize;
    }
    v500 {
        vlan-id 500;
        l3-interface vllan.500;
    }
}
}
}

```



Display the results of the configuration on Switch B.

```
chassis {
  aggregated-devices {
    ethernet {
      device-count 2;
    }
  }
}
interfaces {
  xe-0/0/12 {
    ether-options {
      802.3ad ae0;
    }
  }
  xe-0/0/13 {
    ether-options {
      802.3ad ae0;
    }
  }
  xe-0/0/46 {
    ether-options {
      802.3ad ae1;
    }
  }
}
ae0 {
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
        members v500;
      }
    }
  }
}
ae1 {
  aggregated-ether-options {
    lacp {
      active;
      system-id 00:01:02:03:04:05;
      admin-key 3;
    }
    mc-ae {
      mc-ae-id 3;
      chassis-id 1;
      mode active-active;
      status-control standby;
      init-delay-time 240
    }
  }
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
        members v100;
      }
    }
  }
}
```



```

    }
  }
}
vlan {
  unit 100 {
    family inet {
      address 100.1.1.10/32;
    }
  }
  unit 500 {
    family inet {
      address 3.3.3.1/24;
    }
  }
}
}
protocols {
  iccp {
    local-ip-addr 3.3.3.1;
    peer 3.3.3.2 {
      session-establishment-hold-time 50;
      backup-liveness-detection {
        backup-peer-ip 10.207.64.233;
      }
      liveness-detection {
        minimum-receive-interval 60;
        transmit-interval {
          minimum-interval 60;
        }
      }
    }
  }
}
}
rstp {
  interface ae0.0 {
    disable;
  }
  interface ae1.0 {
    edge;
  }
  interface all {
    mode point-to-point;
  }
  bpdu-block-on-edge;
}
}
multi-chassis {
  multi-chassis-protection 3.3.3.2 {
    interface ae0;
  }
}
}
vllans {
  v100 {
    vlan-id 100;
    l3-interface vlan.100;
    mcae-mac-synchronize;
  }
}

```



```
v500 {  
  vlan-id 500;  
  l3-interface vlan.500;  
}  
}
```

---

### Verification

To verify that the MC-LAG group has been created and is working properly, perform these tasks:

- [Verifying That ICCP Is Working on Switch A on page 2008](#)
- [Verifying That ICCP Is Working on Switch B on page 2008](#)
- [Verifying That LACP Is Active on Switch A on page 2009](#)
- [Verifying That LACP Is Active on Switch B on page 2009](#)
- [Verifying That the MC-AE and ICL-PL Interfaces Are Up on Switch A on page 2009](#)
- [Verifying That the MC-AE and ICL-PL Interfaces Are Up on Switch B on page 2010](#)
- [Verifying MAC Address Synchronization on Switch A and Switch B on page 2010](#)

#### *Verifying That ICCP Is Working on Switch A*

**Purpose** Verify that ICCP is running on Switch A.

**Action** [edit]  
user@switch# show iccp  
Redundancy Group Information for peer 3.3.3.1  
TCP Connection : Established  
Liveliness Detection : Up  
  
Client Application: MCSNOOPD  
  
Client Application: eswd

**Meaning** This output shows that the TCP connection between the peers hosting the MC-LAG is up, liveness detection is up, and MCSNOOPD and ESWD client applications are running.

#### *Verifying That ICCP Is Working on Switch B*

**Purpose** Verify that ICCP is running on Switch B.

**Action** show iccp  
  
[edit]  
user@switch# show iccp  
Redundancy Group Information for peer 3.3.3.2  
TCP Connection : Established  
Liveliness Detection : Up  
  
Client Application: MCSNOOPD  
  
Client Application: eswd



**Meaning** This output shows that the TCP connection between the peers hosting the MC-LAG is up, liveness detection is up, and MCSNOOPD and ESWD client applications are running.

#### *Verifying That LACP Is Active on Switch A*

**Purpose** Verify that LACP is active on Switch A.

**Action** [edit]  
 user@switch# show lacp interfaces  
 Aggregated interface: ae1

LACP state:	Role	Exp	Def	Dist	Col	Syn	Aggr	Timeout	Activity
xe-0/0/46	Actor	No	No	Yes	Yes	Yes	Yes	Fast	Active
xe-0/0/46	Partner	No	No	Yes	Yes	Yes	Yes	Fast	Active
LACP protocol:	Receive State	Transmit State	Mux State						
xe-0/0/46	Current	Fast periodic	Collecting distributing						

**Meaning** This output shows that Switch A is participating in LACP negotiation.

#### *Verifying That LACP Is Active on Switch B*

**Purpose** Verify that LACP is active on Switch B

**Action** [edit]  
 user@switch# show lacp interfaces  
 Aggregated interface: ae1

LACP state:	Role	Exp	Def	Dist	Col	Syn	Aggr	Timeout	Activity
xe-0/0/44	Actor	No	No	Yes	Yes	Yes	Yes	Fast	Active
xe-0/0/44	Partner	No	No	Yes	Yes	Yes	Yes	Fast	Active
LACP protocol:	Receive State	Transmit State	Mux State						
xe-0/0/44	Current	Fast periodic	Collecting distributing						

**Meaning** This output shows that Switch B is participating in LACP negotiation.

#### *Verifying That the MC-AE and ICL-PL Interfaces Are Up on Switch A*

**Purpose** Verify that the MC-AE and ICL-PL interfaces are up on Switch A.

**Action** [edit]  
 user@switch# show interfaces mc-ae  
 Member Link : ae1  
 Current State Machine's State: mcae active state  
 Local Status : active  
 Local State : up  
 Peer Status : active  
 Peer State : up  
 Logical Interface : ae1.0  
 Topology Type : bridge  
 Local State : up  
 Peer State : up  
 Peer Ip/MCP/State : 3.3.3.1 ae0.0 up

**Meaning** This output shows that the MC-AE interface on Switch A is up and active.



**Verifying That the MC-AE and ICL-PL Interfaces Are Up on Switch B**

**Purpose** Verify that the MC-AE and ICL-PL interfaces are up on Switch B.

**Action** [edit]  
user@switch# **show interfaces mc-ae**  
Member Link : ae1  
Current State Machine's State: mcae active state  
Local Status : active  
Local State : up  
Peer Status : active  
Peer State : up  
Logical Interface : ae1.0  
Topology Type : bridge  
Local State : up  
Peer State : up  
Peer Ip/MCP/State : 3.3.3.2 ae0.0 up

**Meaning** This output shows that the MC-AE interface on Switch B is up and active.

**Verifying MAC Address Synchronization on Switch A and Switch B**

**Purpose** Confirm that MAC address synchronization is working on both Switch A and Switch B.

**Action** [edit]  
user@switch# **show ethernet-switching table vlan v100**  
Ethernet-switching table: 3 unicast entries

VLAN	MAC address	Type	Age	Interfaces
v100	*	Flood	-	All-members
v100	84:18:88:df:35:36	Static	-	Router
v100	84:18:88:df:83:0a	Static	-	Router

**Meaning** The output shows two static MAC addresses in VLAN v100. The addresses belong to the Layer 3 IRB/RVI interfaces of both Switch A and Switch B that you configured in the MC-LAG VLAN. Appearance of both addresses indicates that MAC address synchronization is working.

---

**Troubleshooting****Troubleshooting a LAG That Is Down**

**Problem** The **show interfaces terse** command shows that the MC-LAG is **down**

**Solution** Check the following:

- Verify that there is no configuration mismatch.
- Verify that all member ports are up.
- Verify that the MC-LAG is part of family Ethernet switching (Layer 2 LAG).
- Verify that the MC-LAG member is connected to the correct MC-LAG member at the other end.



- Related Documentation**
- [Understanding Multichassis Link Aggregation on page 1931](#)
  - [Configuring Multichassis Link Aggregation on page 2036](#)
  - [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on page 1972](#)
  - [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on page 1972](#)

## Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using Virtual Router Redundancy Protocol (VRRP)

There are two methods for enabling Layer 3 unicast functionality across a multichassis link aggregation group (MC-LAG). You can choose either to configure Virtual Router Redundancy Protocol (VRRP) or synchronize the MAC addresses for the Layer 3 interfaces of the switches participating in the MC-LAG. The procedure to configure VRRP for use in a Layer 3 unicast MC-LAG is included in this example. For more information on configuring MAC address synchronization, see [“Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast using MAC Address Synchronization” on page 1995](#).

- [Requirements on page 2011](#)
- [Overview on page 2011](#)
- [Configuration on page 2013](#)
- [Verification on page 2024](#)
- [Troubleshooting on page 2028](#)

### Requirements

This example uses the following hardware and software components:

- Junos OS Release 12.3 or later for the QFX Series
- Two QFX3500 or QFX3600 switches

Before you configure an MC-LAG, be sure that you understand how to:

- Configure aggregated Ethernet interfaces on a switch. See [“Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch” on page 1950](#).
- Configure the Link Aggregation Control Protocol (LACP) on aggregated Ethernet interfaces on a switch. See [“Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch” on page 1954](#).
- Configure Virtual Router Redundancy Protocol (VRRP) on a switch. See [“Configuring Basic VRRP Support” on page 1792](#).

### Overview

In this example, you configure an MC-LAG across two switches by including interfaces from both switches in an aggregated Ethernet interface (ae1). To support the MC-LAG, create a second aggregated Ethernet interface (ae0) for the interchassis control



link-protection link (ICL-PL). Configure a multichassis protection link for the ICL-PL, Interchassis Control Protocol (ICCP) for the peers hosting the MC-LAG, and Layer 3 connectivity between MC-LAG peers.



**NOTE:** Layer 3 connectivity is required for ICCP.


To complete the configuration, enable VRRP by completing the following steps:

- Create a routed VLAN interface (RVI)
- Create a VRRP group and assign a virtual IP address that is shared between each switch in the VRRP group
- Enable a member of a VRRP group to accept all packets destined for the virtual IP address if it is the master in the VRRP group
- Configure Layer 3 connectivity between the VRRP groups

### Topology

The topology used in this example consists of two switches hosting an MC-LAGs. The two switches are connected to a server. [Figure 45 on page 2012](#) shows the topology of this example.

**Figure 45: Configuring a Multichassis LAG Between Switch A and Switch B**

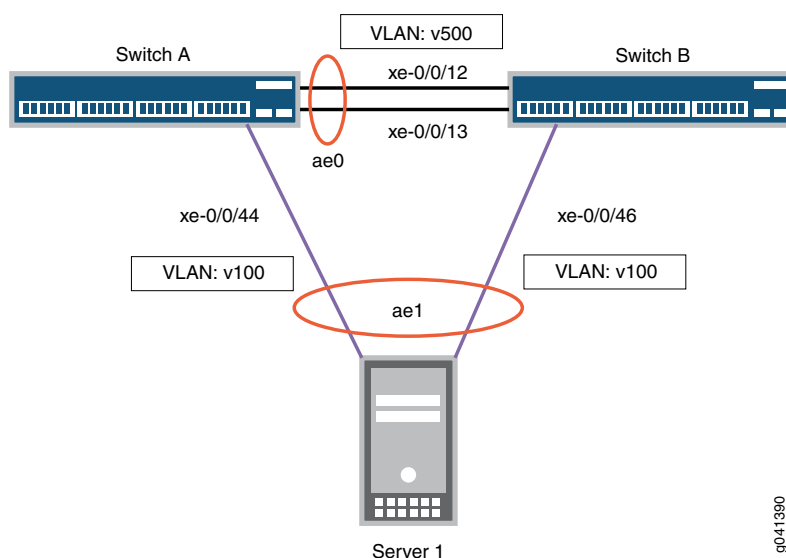

[Table 153 on page 1951](#) details the topology used in this configuration example.



Table 157: Components of the Topology for Configuring a Multichassis LAG Between Two Switches

Hostname	Base Hardware	Multichassis Link Aggregation Group
Switch A	QFX3500 switch or QFX3600 switch	<b>ae0</b> is configured as an aggregated Ethernet interface, and is used as an ICL-PL. The following interfaces are part of <b>ae0</b> : <b>xe-0/0/12</b> and <b>xe-0/0/13</b> on Switch A and <b>xe-0/0/12</b> and <b>xe-0/0/13</b> on Switch B.  <b>ae1</b> is configured as an MC-LAG, and the following two interfaces are part of <b>ae1</b> : <b>xe-0/0/44</b> on Switch A and <b>xe-0/0/46</b> on Switch B.
Switch B		

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, and paste the commands into the CLI at the **[edit]** hierarchy level of Switch A.

```

set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/44 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces vlan unit 100 family inet address 100.1.1.11/24 vrrp-group 1 virtual-address 100.1.1.1
set interfaces vlan unit 100 family inet address 100.1.1.11/24 vrrp-group 1 priority 200
set interfaces vlan unit 100 family inet address 100.1.1.11/24 vrrp-group 1 accept-data
set interfaces vlan unit 500 family inet address 3.3.3.2/24
set vlans v100 vlan-id 100
set vlans v100 l3-interface vlan.100
set vlans v500 vlan-id 500
set vlans v500 l3-interface vlan.500
set protocols iccp local-ip-addr 3.3.3.2
set protocols iccp peer 3.3.3.1 session-establishment-hold-time 50
set protocols iccp peer 3.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 3.3.3.1 liveness-detection minimum-receive-interval 60
set protocols iccp peer 3.3.3.1 liveness-detection transmit-interval minimum-interval 60
set protocols rstp interface ae0.0 disable
set protocols rstp interface ae1.0 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 3.3.3.1 interface ae0

```



To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, and paste the commands into the CLI at the **[edit]** hierarchy level of Switch B.

```
set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/46 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control standby
set ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces vlan unit 100 family inet address 100.1.1.10/24 vrrp-group 1 virtual-address 100.1.1.1
set interfaces vlan unit 100 family inet address 100.1.1.10/24 vrrp-group 1 priority 150
set interfaces vlan unit 100 family inet address 100.1.1.10/24 vrrp-group 1 accept-data
set interfaces vlan unit 500 family inet address 3.3.3.1/24
set vlans v100 vlan-id 100
set vlans v100 l3-interface vlan.100
set vlans v500 vlan-id 500
set vlans v500 l3-interface vlan.500
set protocols iccp local-ip-addr 3.3.3.1
set protocols iccp peer 3.3.3.2 session-establishment-hold-time 50
set protocols iccp peer 3.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 3.3.3.2 liveness-detection minimum-receive-interval 60
set protocols iccp peer 3.3.3.2 liveness-detection transmit-interval minimum-interval 60
set protocols rstp interface ae0.0 disable
set protocols rstp interface ae1.0 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 3.3.3.2 interface ae0
```

### Configuring MC-LAG on Two Switches

#### Step-by-Step Procedure

To enable multichassis protection link between MC-LAG peers:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

1. Configure the number of LAGs on both Switch A and Switch B.

```
[edit chassis]
user@switch# set aggregated-devices ethernet device-count 2
```

2. Add member interfaces to the aggregated Ethernet interfaces on both Switch A and Switch B.

```
[edit interfaces]
user@switch# set xe-0/0/12 ether-options 802.3ad ae0
[edit interfaces]
user@switch# set xe-0/0/13 ether-options 802.3ad ae0
```



```
[edit interfaces]
user@switch# set xe-0/0/44 ether-options 802.3ad ae1
[edit interfaces]
user@switch# set xe-0/0/46 ether-options 802.3ad ae1
```

3. Configure a trunk interface between Switch A and Switch B.
 

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching port-mode trunk
```
4. Configure a multichassis protection link between Switch A and Switch B.
 

Switch A:

```
[edit]
user@switch# set multi-chassis multi-chassis-protection 3.3.3.2 interface ae0
```

Switch B:

```
[edit]
user@switch# set multi-chassis multi-chassis-protection 3.3.3.1 interface ae0
```

#### Step-by-Step Procedure

To enable ICCP:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

1. Configure the local IP address to be in the ICCP connection on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp local-ip-addr 3.3.3.2
```

Switch B:

```
[edit protocols]
user@switch# set iccp local-ip-addr 3.3.3.1
```

2. Configure the peer IP address and minimum receive interval for a (BFD) session for ICCP on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.1 liveness-detection minimum-receive-interval 60
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.2 liveness-detection minimum-receive-interval 60
```

3. Configure the peer IP address and minimum transmit interval for Bidirectional Forwarding Detection (BFD) session for ICCP on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.1 liveness-detection transmit-interval minimum-interval 60
```

Switch B:

```
[edit protocols]
```



```
user@switch# set iccp peer 3.3.3.2 liveness-detection transmit-interval minimum-interval 60
```

4. (Optional) Configure the time during which an ICCP connection must succeed between MC-LAG peers on Switch A and Switch B.



**NOTE:** Configuring session establishment hold time helps in faster ICCP connection establishment. The recommended value is 50 seconds.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.1 session-establishment-hold-time 50
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.2 session-establishment-hold-time 50
```

5. (Optional) Configure the backup IP address to be used for backup liveness detection on both Switch A and Switch B.



**NOTE:** By default, backup liveness detection is not enabled. Configuring a backup IP address helps achieve sub-second traffic loss during a MC-LAG peer reboot.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.232
```

6. Configure Layer 3 connectivity between the MC-LAG peers on both Switch A and Switch B.

```
[edit vlans]
user@switch# set v500 vlan-id 500
[edit vlans]
user@switch# set v500 l3-interface vlan.500
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching port-mode trunk vlan members v500
```



### Step-by-Step Procedure

To enable the MC-LAG interface:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

1. Enable LACP on the MC-LAG interface on Switch A and Switch B.



**NOTE:** At least one end needs to be active. The other end can be either active or passive.

[edit interfaces]

user@switch# **set ae1 aggregated-ether-options lacp active**

2. Specify the same multichassis aggregated Ethernet identification number on both MC-LAG peers on Switch A and Switch B.

[edit interfaces]

user@switch# **set ae1 aggregated-ether-options mc-ae mc-ae-id 3**

3. Specify a unique chassis ID for the MC-LAG on the MC-LAG peers on Switch A and Switch B.

Switch A:

[edit interfaces]

user@switch# **set ae1 aggregated-ether-options mc-ae chassis-id 0**

Switch B:

[edit interfaces]

user@switch# **set ae1 aggregated-ether-options mc-ae chassis-id 1**

4. Specify the operating mode of the MC-LAG on both Switch A and Switch B.



**NOTE:** Only active-active mode is supported at this time.

[edit interfaces]

user@switch# **set ae1 aggregated-ether-options mc-ae mode active-active**

5. Specify the status control for MC-LAG on Switch A and Switch B.



**NOTE:** You must configure status control on both Switch A and Switch B hosting the MC-LAG. If one peer is in active mode, the other must be in standby mode.

Switch A:

[edit interfaces]

user@switch# **set ae1 aggregated-ether-options mc-ae status-control active**

Switch B:

[edit interfaces]



- user@switch# **set ae1 aggregated-ether-options mc-ae status-control standby**
6. Specify the number of seconds by which the bring-up of the MC-AE interface should be deferred after you reboot Switch A and Switch B.



**NOTE:** The recommended value for maximum VLAN configuration (for example, 4,000 VLANs) is 240 seconds. If IGMP snooping is enabled on all of the VLANs, the recommended value is 420 seconds.

- [edit interfaces]  
user@switch# **set ae1 aggregated-ether-options mc-ae init-delay-time 240**
7. Specify the same LACP system ID for the MC-LAG on Switch A and Switch B.
- [edit interfaces]  
user@switch# **set ae1 aggregated-ether-options lacp system-ID 00:01:02:03:04:05**
8. Specify the same LACP administration key on both Switch A and Switch B.
- [edit interfaces]  
user@switch# **set ae1 aggregated-ether-options lacp admin-key 3**
9. Enable a VLAN on the MC-LAG on Switch A and Switch B.
- [edit interfaces]  
user@switch# **set ae1 unit 0 family ethernet-switching port-mode trunk**  
[edit]  
user@switch# **set vlans v100 vlan-id 100**  
[edit interfaces]  
user@switch# **set ae1 unit 0 family ethernet-switching vlan members v100**
10. Enable VRRP on the MC-LAG on Switch A and Switch B:
    - Create a routed VLAN interface (RVI), assign a virtual IP address that is shared between each switch in the VRRP group, and assign an individual IP address for each switch in the VRRP group:

Switch A:

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 100.1.1.1/24 vrrp-group 1
virtual-address 100.1.1.1
```

Switch B:

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 100.1.1.10/24 vrrp-group 1
virtual-address 100.1.1.1
```

- Assign the priority for each switch in the VRRP group:



**NOTE:** The switch configured with the highest priority is the master.

Switch A:

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 100.1.1.11/24 vrrp-group 1 priority 200
```

Switch B:



```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 100.1.1.10/24 vrrp-group 1 priority 150
```

- Enable the switch to accept all packets destined for the virtual IP address if it is the master in the VRRP group:

Switch A:

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 100.1.1.11/24 vrrp-group 1 accept-data
```

Switch B:

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 100.1.1.10/24 vrrp-group 1 accept-data
```

- Configure Layer 3 connectivity between Switch A and Switch B.

```
[edit interfaces]
user@switch# set vlans v100 l3-interface vlan.100
```

### Step-by-Step Procedure

To enable RSTP:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

1. Enable RSTP globally on all interfaces on Switch A and Switch B.

```
[edit]
user@switch# set protocols rstp interface all mode point-to-point
```

2. Disable RSTP on the ICL-PL interfaces on Switch A and Switch B:

```
[edit]
user@switch# set protocols rstp interface ae0.0 disable
```

3. Configure the MC-LAG interfaces as edge ports on Switch A and Switch B.

```
[edit]
user@switch# set protocols rstp interface ae1.0 edge
```

4. Enable BPDU blocking on all interfaces except for the ICL-PL interfaces on Switch A and Switch B.

```
[edit]
user@switch# set protocols rstp bpdu-block-on-edge
```

### Results

Display the results of the configuration on Switch A.

```
chassis {
  aggregated-devices {
    ethernet {
      device-count 2;
    }
  }
}
interfaces {
  xe-0/0/12 {
    ether-options {
      802.3ad ae0;
    }
  }
}
```



```
}
xe-0/0/13 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/44 {
  ether-options {
    802.3ad ae1;
  }
}
ae0 {
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
        members v500;
      }
    }
  }
}
ae1 {
  aggregated-ether-options {
    lacp {
      active;
      system-id 00:01:02:03:04:05;
      admin-key 3;
    }
    mc-ae {
      mc-ae-id 3;
      chassis-id 0;
      mode active-active;
      status-control active;
      init-delay-time 240;
    }
  }
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
        members v100;
      }
    }
  }
}
vlan {
  unit 100 {
    family inet {
      address 100.1.1.1/24 {
        vrrp-group 1 {
          virtual-address 100.1.1.1;
          priority 200;
          accept-data;
        }
      }
    }
  }
}
```



```

    }
    unit 500 {
        family inet {
            address 3.3.3.2/24;
        }
    }
}
protocols {
    iccp {
        local-ip-addr 3.3.3.2;
        peer 3.3.3.1 {
            session-establishment-hold-time 50;
            backup-liveness-detection {
                backup-peer-ip 10.207.64.233;
            }
            liveness-detection {
                minimum-receive-interval 60;
                transmit-interval {
                    minimum-interval 60;
                }
            }
        }
    }
}
rstp {
    interface ae0.0 {
        disable;
    }
    interface ae1.0 {
        edge;
    }
    interface all {
        mode point-to-point;
    }
    bpdu-block-on-edge;
}
multi-chassis {
    multi-chassis-protection 3.3.3.1 {
        interface ae0;
    }
}
vlans {
    v100 {
        vlan-id 100;
        l3-interface vlan.100;
    }
    v500 {
        vlan-id 500;
        l3-interface vlan.500;
    }
}
}

```

Display the results of the configuration on Switch B.

```
chassis {
```



```
aggregated-devices {
  ethernet {
    device-count 2;
  }
}
}
interfaces {
  xe-0/0/12 {
    ether-options {
      802.3ad ae0;
    }
  }
  xe-0/0/13 {
    ether-options {
      802.3ad ae0;
    }
  }
  xe-0/0/44 {
    ether-options {
      802.3ad ae1;
    }
  }
  ae0 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members v500;
        }
      }
    }
  }
  ae1 {
    aggregated-ether-options {
      lacp {
        active;
        system-id 00:01:02:03:04:05;
        admin-key 3;
      }
      mc-ae {
        mc-ae-id 3;
        chassis-id 1;
        mode active-active;
        status-control active;
        init-delay-time 240;
      }
    }
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members v100;
        }
      }
    }
  }
}
```



```

vlan {
  unit 100 {
    family inet {
      address 100.1.1.10/24 {
        vrrp-group 1 {
          virtual-address 100.1.1.1;
          priority 200;
          accept-data;
        }
      }
    }
  }
  unit 500 {
    family inet {
      address 3.3.3.1/24;
    }
  }
}
protocols {
  iccp {
    local-ip-addr 3.3.3.1;
    peer 3.3.3.2 {
      session-establishment-hold-time 50;
      backup-liveness-detection {
        backup-peer-ip 10.207.64.233;
      }
      liveness-detection {
        minimum-receive-interval 60;
        transmit-interval {
          minimum-interval 60;
        }
      }
    }
  }
  rstp {
    interface ae0.0 {
      disable;
    }
    interface ae1.0 {
      edge;
    }
    interface all {
      mode point-to-point;
    }
    bpdu-block-on-edge;
  }
}
multi-chassis {
  multi-chassis-protection 3.3.3.2 {
    interface ae0;
  }
}
vlans {
  v100 {
    vlan-id 100;
  }
}

```



```
l3-interface vlan.100;  
}  
v500 {  
  vlan-id 500;  
  l3-interface vlan.500;  
}  
}
```

---

## Verification

To verify that the MC-LAG group has been created and is working properly, perform these tasks:

- [Verifying That ICCP Is Working on Switch A on page 2024](#)
- [Verifying That ICCP Is Working on Switch B on page 2024](#)
- [Verifying That LACP Is Active on Switch A on page 2025](#)
- [Verifying That LACP Is Active on Switch B on page 2025](#)
- [Verifying That the MC-AE and ICL-PL Interfaces Are Up on Switch A on page 2025](#)
- [Verifying That the MC-AE and ICL-PL Interfaces Are Up on Switch B on page 2026](#)
- [Verifying that MAC Learning Is Occurring on Switch A on page 2026](#)
- [Verifying that MAC Learning Is Occurring on Switch B on page 2027](#)
- [Verifying that Switch A is the Master in the VRRP Group on page 2027](#)
- [Verifying that Switch B is the Backup Member in the VRRP Group on page 2027](#)
- [Verifying that the Virtual IP Address is Attached to an Individual Address on Switch A on page 2028](#)
- [Verifying that the Virtual IP Address is Attached to an Individual Address on Switch B on page 2028](#)

### *Verifying That ICCP Is Working on Switch A*

**Purpose** Verify that ICCP is running on Switch A.

**Action** [edit]  
user@switch# **show iccp**  
Redundancy Group Information for peer 3.3.3.1  
TCP Connection : Established  
Liveliness Detection : Up  
  
Client Application: MCSNOOPD  
  
Client Application: eswd

**Meaning** This output shows that the TCP connection between the peers hosting the MC-LAG is up, liveness detection is up, and MCSNOOPD and ESWD client applications are running.

### *Verifying That ICCP Is Working on Switch B*

**Purpose** Verify that ICCP is running on Switch B.



**Action** `show iccp`

```
[edit]
user@switch# show iccp
Redundancy Group Information for peer 3.3.3.2
  TCP Connection      : Established
  Liveliness Detection : Up

Client Application: MCSNOOPD

Client Application: eswd
```

**Meaning** This output shows that the TCP connection between the peers hosting the MC-LAG is up, liveness detection is up, and MCSNOOPD and ESWD client applications are running.

**Verifying That LACP Is Active on Switch A**

**Purpose** Verify that LACP is active on Switch A.

```
[edit]
user@switch# show lacp interfaces
Aggregated interface: ae1
  LACP state:      Role  Exp  Def  Dist  Col  Syn  Aggr  Timeout  Activity
  xe-0/0/46       Actor  No   No   Yes  Yes  Yes  Yes   Fast    Active
  xe-0/0/46       Partner No   No   Yes  Yes  Yes  Yes   Fast    Active
  LACP protocol:   Receive State Transmit State      Mux State
  xe-0/0/46               Current   Fast periodic Collecting distributing
```

**Meaning** This output shows that Switch A is participating in LACP negotiation.

**Verifying That LACP Is Active on Switch B**

**Purpose** Verify that LACP is active on Switch B

```
[edit]
user@switch# show lacp interfaces
Aggregated interface: ae1
  LACP state:      Role  Exp  Def  Dist  Col  Syn  Aggr  Timeout  Activity
  xe-0/0/44       Actor  No   No   Yes  Yes  Yes  Yes   Fast    Active
  xe-0/0/44       Partner No   No   Yes  Yes  Yes  Yes   Fast    Active
  LACP protocol:   Receive State Transmit State      Mux State
  xe-0/0/44               Current   Fast periodic Collecting distributing
```

**Meaning** This output shows that Switch B is participating in LACP negotiation.

**Verifying That the MC-AE and ICL-PL Interfaces Are Up on Switch A**

**Purpose** Verify that the MC-AE and ICL-PL interfaces are up on Switch A.



**Action** [edit]  
 user@switch# **show interfaces mc-ae**  
 Member Link : ae1  
 Current State Machine's State: mcae active state  
 Local Status : active  
 Local State : up  
 Peer Status : active  
 Peer State : up  
 Logical Interface : ae1.0  
 Topology Type : bridge  
 Local State : up  
 Peer State : up  
 Peer Ip/MCP/State : 3.3.3.1 ae0.0 up

**Meaning** This output shows that the MC-AE interface on Switch A is up and active.

#### *Verifying That the MC-AE and ICL-PL Interfaces Are Up on Switch B*

**Purpose** Verify that the MC-AE and ICL-PL interfaces are up on Switch B.

**Action** [edit]  
 user@switch# **show interfaces mc-ae**  
 Member Link : ae1  
 Current State Machine's State: mcae active state  
 Local Status : active  
 Local State : up  
 Peer Status : active  
 Peer State : up  
 Logical Interface : ae1.0  
 Topology Type : bridge  
 Local State : up  
 Peer State : up  
 Peer Ip/MCP/State : 3.3.3.2 ae0.0 up

**Meaning** This output shows that the MC-AE interface on Switch B is up and active.

#### *Verifying that MAC Learning Is Occurring on Switch A*

**Purpose** Verify that MAC learning is working on Switch A.

**Action** [edit]  
 user@switch# **show ethernet-switching table**  
 Ethernet-switching table: 6 entries, 1 learned, 0 persistent entriesC

VLAN	MAC address	Type	Age	Interfaces
v100	*	Flood		- All-members
v100	00:00:5e:00:01:01	Static		- Router
v100	78:fe:3d:5a:07:42	Static		- Router
v100	78:fe:3d:5b:ad:c2	Learn(R)	0	ae0.0
v500	*	Flood		- All-members
v500	78:fe:3d:5a:07:42	Static		- Router

**Meaning** The output shows two static MAC address in VLAN v100 and one static MAC address in VLAN v500. These addresses belong to the Layer 3 RVI addresses on both Switch A and Switch B that you configured in the MC-LAG. The ICL-PL interface configured on the VRRP master member learned the VLAN v100 Learn (R) MAC address of the VRRP backup member.



**Verifying that MAC Learning Is Occurring on Switch B**

**Purpose** Verify that MAC learning is working on Switch B.

**Action** [edit]

user@switch# **show ethernet-switching table**

Ethernet-switching table: 7 entries, 1 learned, 0 persistent entries

VLAN	MAC address	Type	Age	Interfaces
v100	*	Flood		- All-members
v100	00:00:5e:00:01:01	Static		- Router
v100	78:fe:3d:5a:07:42	Learn(R)	0	ae0.0
v100	78:fe:3d:5b:ad:c2	Static		- Router
v200	78:fe:3d:5b:ad:c2	Static		- Router
v500	*	Flood		- All-members
v500	78:fe:3d:5b:ad:c2	Static		- Router

**Meaning** The output shows two static MAC address in VLAN v100 and one static MAC address in VLAN v500. These addresses belong to the Layer 3 RVI addresses on both Switch A and Switch B that you configured in the MC-LAG. The ICL-PL interface configured on the VRRP backup member learned the VLAN v100 Learn (R) MAC address of the VRRP master member.

**Verifying that Switch A is the Master in the VRRP Group**

**Purpose** Verify that Switch A is the master member in the VRRP group.

**Action** [edit]

user@switch# **show vrrp**

Interface	State	Group	VR state	VR Mode	Timer	Type	Address
vlan.100	up	1	master	Active	A 0.605	lcl	100.1.1.11
						vip	100.1.1.1

**Meaning** The output shows that Switch A is the master member in the VRRP group.

**Verifying that Switch B is the Backup Member in the VRRP Group**

**Purpose** Verify that Switch B is the backup member in the VRRP group.

**Action** [edit]

user@switch# **show vrrp**

Interface	State	Group	VR state	VR Mode	Timer	Type	Address
vlan.100	up	1	backup	Active	A 0.605	lcl	100.1.1.10
						vip	100.1.1.1

**Meaning** The output shows that Switch B is the backup member in the VRRP group.



**Verifying that the Virtual IP Address is Attached to an Individual Address on Switch A**

**Action** [edit]  
 user@switch# run show interfaces terse vlan

Interface	Admin	Link	Proto	Local	Remote
vlan	up	up			
vlan.100	up	up	inet	100.1.1.1/24	
				100.1.1.11/24	
vlan.500	up	up	inet	3.3.3.2/24	

**Meaning** The output shows that the virtual IP address (100.1.1.1/24) is bound to the individual IP address (100.1.1.11/24) on Switch A.

**Verifying that the Virtual IP Address is Attached to an Individual Address on Switch B**

**Action** [edit]  
 user@switch# run show interfaces terse vlan

Interface	Admin	Link	Proto	Local	Remote
vlan	up	up			
vlan.100	up	up	inet	100.1.1.1/24	
				100.1.1.10/24	
vlan.500	up	up	inet	3.3.3.1/24	

**Meaning** The output shows that the virtual IP address (100.1.1.1/24) is bound to the individual IP address (100.1.1.10/24) on Switch B.

**Troubleshooting****Troubleshooting a LAG That Is Down**

**Problem** The **show interfaces terse** command shows that the MC-LAG is **down**

**Solution** Check the following:

- Verify that there is no configuration mismatch.
- Verify that all member ports are up.
- Verify that the MC-LAG is part of family Ethernet switching (Layer 2 LAG).
- Verify that the MC-LAG member is connected to the correct MC-LAG member at the other end.

**Related Documentation**

- [Understanding Multichassis Link Aggregation on page 1931](#)
- [Configuring Multichassis Link Aggregation on page 2036](#)

**Configuration Tasks**

- [Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029](#)
- [Configuring Aggregated Ethernet LACP on page 2030](#)
- [Configuring Ethernet Loopback Capability on page 2031](#)



- [Configuring Interfaces for Uplink Failure Detection on page 2032](#)
- [Configuring a Layer 3 Logical Interface on page 2033](#)
- [Configuring Link Aggregation on page 2033](#)
- [Configuring Multichassis Link Aggregation on page 2036](#)
- [Configuring the QSFP+ Port Type on QFX3500 Standalone Switches on page 2039](#)
- [Configuring the Port Type on QFX3600 Standalone Switches on page 2041](#)

## Configuring Gigabit and 10-Gigabit Ethernet Interfaces

QFX Series products include a factory default configuration that:

- Enables all 10-Gigabit Ethernet network interfaces on the switch
- Sets a default port mode (access)
- Sets default link settings
- Specifies a logical unit (**unit 0**) and assigns it to **family ethernet-switching**
- Configures Storm Control on all 10-Gigabit Ethernet network interfaces
- Provides basic Rapid Spanning Tree Protocol (RSTP) and Link Layer Discovery Protocol (LLDP) configuration

This topic describes:

- [Configuring Port Mode on page 2029](#)
- [Configuring the Link Settings for Gigabit Ethernet and 10-Gigabit Ethernet Interfaces on page 2029](#)
- [Configuring the IP Options on page 2030](#)

### Configuring Port Mode

If you are connecting a switch to other switches and to routers on the LAN, you need to assign the interface to a logical port and you need to configure the logical port as a trunk port.

To configure a Gigabit Ethernet or 10-Gigabit interface for trunk port mode:

```
[edit]
user@switch# set interfaces interface-name unit logical-unit-number family ethernet-switching
port-mode trunk
```

### Configuring the Link Settings for Gigabit Ethernet and 10-Gigabit Ethernet Interfaces

QFX Series products include a factory default configuration that enables Gigabit Ethernet and 10-Gigabit Ethernet and interfaces with applicable link settings.

The following default configurations are available on Gigabit Ethernet interfaces:

- The speed for Gigabit Ethernet interfaces is set to 1000 Mbps by default.



- Gigabit Ethernet interfaces operate in full-duplex mode by default, and autonegotiation is supported. If you want to disable autonegotiation, you need to manually set the speed to 1g.

The following default configurations are available on 10-Gigabit Ethernet interfaces:

- The speed for 10-Gigabit Ethernet interfaces is set to 10 Gbps by default. The speed cannot be configured.
- 10-Gigabit Ethernet interfaces operate in full-duplex mode by default. Autonegotiation is not supported.

The **ether-options** statement enables you to modify the following options:

- **802.3ad**—Specify an aggregated Ethernet bundle for both Gigabit Ethernet and 10-Gigabit Ethernet interfaces.
- **autonegotiation**—Enable or disable autonegotiation of flow control, link mode, and speed for Gigabit Ethernet interfaces.
- **link-mode**—Specify **full-duplex**, **half-duplex**, or **automatic** for Gigabit Ethernet interfaces.
- **loopback**—Enable or disable a loopback interface for both Gigabit Ethernet and 10-Gigabit Ethernet interfaces.

To set **ether-options** for both Gigabit Ethernet and 10-Gigabit Ethernet interfaces:

```
[edit]
user@switch# set interfaces interface-name ether-options
```

---

### Configuring the IP Options

To specify an IP address for the logical unit:

```
[edit]
user@switch# set interfaces interface-name unit logical-unit-number family inet address ip-address
```

#### Related Documentation

- [Monitoring Interface Status and Traffic on page 279](#)
- [show interfaces xe on page 1718](#)
- show interfaces ge-
- [Understanding Interface Naming Conventions on page 1915](#)

## Configuring Aggregated Ethernet LACP

For aggregated Ethernet interfaces on the QFX Series, you can configure the Link Aggregation Control Protocol (LACP). LACP is one method of bundling several physical interfaces to form one logical interface. You can configure aggregated Ethernet with or without LACP enabled.

Before you configure LACP, be sure you have configured the aggregated Ethernet bundles—also known as link aggregation groups (LAGs).

When LACP is enabled, the local and remote sides of the aggregated Ethernet links exchange protocol data units (PDUs), containing information about the state of the link.



You can configure Ethernet links to actively transmit PDUs, or you can configure the links to passively transmit them, sending out LACP PDUs only when they receive them from another link. One side of the link must be configured as **active** for the link to be up.



**NOTE:** Do not add LACP to a LAG if the remote end of the LAG link is a security device, unless the security device supports LACP. Security devices often do not support LACP because they require a deterministic configuration.

To configure LACP:

1. Enable the LACP mode:

```
[edit interfaces]
user@switch# set aex aggregated-ether-options lacp mode
```

For example, to specify the mode as active, execute the following command:

```
[edit interfaces]
user@switch# set aex aggregated-ether-options lacp active
```

2. Specify the interval and speed at which the interfaces send LACP packets:

```
[edit interfaces]
user@switch# set aex aggregated-ether-options lacp periodic interval
```

For example, to specify the interval as fast, execute the following command:

```
[edit interfaces]
user@switch# set aex aggregated-ether-options lacp periodic fast
```

#### Related Documentation

- [Configuring Link Aggregation on page 2033](#)
- [Verifying the Status of a LAG Interface on page 2124](#)
- [Verifying That LACP Is Configured Correctly and Bundle Members Are Exchanging LACP Protocol Packets on page 2125](#)
- [Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch on page 1950](#)
- [Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch on page 1954](#)
- [show lacp statistics interfaces \(View\) on page 2307](#)

## Configuring Ethernet Loopback Capability

To place an interface in loopback mode, include the **loopback** statement:

```
loopback;
```

To return to the default—that is, to disable loopback mode—delete the **loopback** statement from the configuration:

```
[edit]
user@switch# delete interfaces interface-name ether-options loopback
```

To explicitly disable loopback mode, include the **no-loopback** statement:



**no-loopback;**

You can include the **loopback** and **no-loopback** statements at the following hierarchy levels:

- **[edit interfaces *interface-name* aggregated-ether-options]**
- **[edit interfaces *interface-name* ether-options]**

**Related  
Documentation**

- [Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029](#)

## Configuring Interfaces for Uplink Failure Detection

You can configure uplink failure detection on the QFX Series to help ensure balanced traffic flow. Using this feature, switches can monitor and detect link failure on uplink interfaces and can propagate the failure information to downlink interfaces, so that servers connected to those downlinks can switch over to secondary interfaces.

Follow these configuration guidelines:

- Configure an interface in only one group.
- Configure a maximum of eight groups for each switch.
- Configure a maximum of eight uplinks to monitor and a maximum of 48 downlinks to disable in each group.
- Configure physical links and logical links in separate groups.

To configure uplink failure detection on a switch:

1. Specify a name for an uplink failure detection group:

```
[edit protocols]
user@switch# set uplink-failure-detection group group-name
```

2. Add an uplink interface to the group:

```
[edit protocols]
user@switch# set uplink-failure-detection group group-name link-to-monitor interface-name
```

3. Repeat Step 2 for each uplink interface you add to the group.

4. Add a downlink interface to the group:

```
[edit protocols]
user@switch# set uplink-failure-detection group group-name link-to-disable interface-name
```

5. Repeat Step 4 for each downlink interface you add to the group.



**NOTE:** After you have configured an uplink failure detection group, use the **show uplink-failure-detection group (Uplink Failure Detection) *group-name*** command to verify that all interfaces in the group are up. If the interfaces are down, uplink failure detection does not work.

---

**Related  
Documentation**

- [Overview of Uplink Failure Detection on page 1941](#)



- [Example: Configuring Interfaces for Uplink Failure Detection on page 1945](#)
- [Verifying That Uplink Failure Detection Is Working Correctly on page 2126](#)

## Configuring a Layer 3 Logical Interface

QFX Series systems use Layer 3 logical interfaces to divide a physical interface into multiple logical interfaces, each corresponding to a VLAN. Layer 3 logical interfaces route traffic between subnets.

To configure Layer 3 logical interfaces, enable VLAN tagging and partition one or more physical ports into multiple logical interfaces, each corresponding to a VLAN ID.

Before you begin, make sure you set up your VLANs. See [“Configuring VLANs” on page 1553](#).

To configure Layer 3 logical interfaces:

1. Enable VLAN tagging:

```
[edit interfaces interface-name]
user@switch# set vlan-tagging
```

2. Bind each VLAN ID to a logical interface:

```
[edit interfaces interface-name]
user@switch# set unit logical-unit-number vlan-id vlan-id-number
```

### Related Documentation

- [Understanding Layer 3 Logical Interfaces on page 1930](#)
- [Verifying That Layer 3 Logical Interfaces Are Working on page 2124](#)

## Configuring Link Aggregation

Use the link aggregation feature to aggregate one or more links to form a virtual link or aggregation group. The MAC client can treat this virtual link as if it were a single link. Link aggregation increases bandwidth, provides graceful degradation as failure occurs, and increases link availability.



**NOTE:** An interface with an already configured IP address cannot form part of the aggregation group.

1. [Creating an Aggregated Ethernet Interface on page 2034](#)
2. [Configuring the VLAN Name and VLAN ID Number on page 2034](#)
3. [Configuring Aggregated Ethernet LACP on page 2034](#)



## Creating an Aggregated Ethernet Interface

---

To create an aggregated Ethernet interface:

1. Specify the number of aggregated Ethernet interfaces to be created:

```
[edit chassis]
user@switch# set aggregated-devices interfaces device-count device-count
```

For example, to specify 5:

```
[edit chassis]
user@switch# set aggregated-devices interfaces device-count
```

2. Specify the minimum number of links for the aggregated Ethernet interface (aex), that is, the defined bundle, to be labeled “up”:



**NOTE:** By default only one link must be up for the bundle to be labeled “up”.

```
[edit interfaces]
user@switch# set interface-name aggregated-ether-options minimum-links minimum-links
```

For example, to specify 5:

```
[edit interfaces]
user@switch# set interface-name aggregated-ether-options minimum-links 5
```

3. Specify the link speed for the aggregated Ethernet bundle:

```
[edit interfaces]
user@switch# set interface-name aggregated-ether-options link-speed link-speed
```

For example, to specify 10g:

```
[edit interfaces]
user@switch# set interface-name aggregated-ether-options link-speed 10g
```

4. Specify the members to be included within the aggregated Ethernet bundle:

```
[edit interfaces]
user@switch# set interface-name ether-options 802.3ad aex
user@switch# set interface-name ether-options 802.3ad aex
```

## Configuring the VLAN Name and VLAN ID Number

---

```
[edit vlans]
user@switch# set vlan-name vlan-id vlan-id-number
```

For example, 100.

## Configuring Aggregated Ethernet LACP

---

For aggregated Ethernet interfaces on the QFX Series, you can configure the Link Aggregation Control Protocol (LACP). LACP is one method of bundling several physical interfaces to form one logical interface. You can configure aggregated Ethernet with or without LACP enabled.

Before you configure LACP, be sure you have configured the aggregated Ethernet bundles—also known as link aggregation groups (LAGs).



When LACP is enabled, the local and remote sides of the aggregated Ethernet links exchange protocol data units (PDUs), containing information about the state of the link. You can configure Ethernet links to actively transmit PDUs, or you can configure the links to passively transmit them, sending out LACP PDUs only when they receive them from another link. One side of the link must be configured as **active** for the link to be up.



**NOTE:** Do not add LACP to a LAG if the remote end of the LAG link is a security device, unless the security device supports LACP. Security devices often do not support LACP because they require a deterministic configuration.

To configure LACP:

1. Enable the LACP mode:

```
[edit interfaces]
user@switch# set aex aggregated-ether-options lacp mode
```

For example, to specify the mode as active, execute the following command:

```
[edit interfaces]
user@switch# set aex aggregated-ether-options lacp active
```

2. Specify the interval and speed at which the interfaces send LACP packets:

```
[edit interfaces]
user@switch# set aex aggregated-ether-options lacp periodic interval
```

For example, to specify the interval as fast, execute the following command:

```
[edit interfaces]
user@switch# set aex aggregated-ether-options lacp periodic fast
```

#### Related Documentation

- [Understanding Interface Naming Conventions on page 1915](#)
- [Verifying the Status of a LAG Interface on page 2124](#)
- [Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch on page 1950](#)



## Configuring Multichassis Link Aggregation

Multichassis link aggregation groups (MC-LAGs) enable a client device to form a logical LAG interface between two switches. An MC-LAG provides redundancy and load balancing between the two switches, multihoming support, and a loop-free Layer 2 network without running the Spanning Tree Protocol (STP). At this time, MC-LAGs support only Layer 2 features.

The MC-LAG switches use the Interchassis Control Protocol (ICCP) to exchange the control information between two MC-LAG switches.

On one end of an MC-LAG is an MC-LAG client device, such as a server, that has one or more physical links in a link aggregation group (LAG). This client device does not need to detect the MC-LAG. On the other side of MC-LAG are two MC-LAG switches. Each of the switches has one or more physical links connected to a single client device. The switches coordinate with each other to ensure that data traffic is forwarded properly.



**NOTE:** An interface with an already configured IP address cannot form part of the aggregated Ethernet interface or multichassis aggregated Ethernet interface group.

Perform the following steps on each switch that is hosting an MC-LAG:

1. Specify the same multichassis aggregated Ethernet identification number for the MC-LAG that the aggregated Ethernet interface belongs to on each switch.

```
[edit interfaces]
user@switch# set aeX aggregated-ether-options mc-ae mc-ae-id number
```

For example:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae mc-ae-id 3
```

2. Specify a unique chassis ID for the MC-LAG that the aggregated Ethernet interface belongs to on each switch.

```
[edit interfaces]
user@switch# set aeX aggregated-ether-options mc-ae chassis-id number
```

For example:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 0
```

3. Specify the mode of the MC-LAG the aggregated Ethernet interface belongs to.



**NOTE:** Only active-active mode is supported at this time.

```
[edit interfaces]
user@switch# set aeX aggregated-ether-options mc-ae mode mode
```

For example:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae mode active-active
```



4. Specify whether the aggregated Ethernet interface participating in the MC-LAG is primary or secondary. Primary is **active**, and secondary is **standby**.



**NOTE:** You must configure status control on both switches hosting the MC-LAG. If one switch is in active mode, the other must be in standby mode.

```
[edit interfaces]
user@switch# set aeX aggregated-ether-options mc-ae status-control (active | standby)
```

For example:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae status-control active
```

5. Specify the same LACP system ID on each switch.

```
[edit interfaces]
user@switch# set aeX aggregated-ether-options lacp system-id mac-address
```

For example:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
```

6. Specify the same LACP administration key on each switch.

```
[edit interfaces]
user@switch# set aeX aggregated-ether-options lacp admin-key number
```

For example:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp admin-key 3
```

7. Configure ICCP by doing the following on each switch hosting the MC-LAG:

- a. Configure the local IP address to be used by all switches hosting the MC-LAG.

```
[edit protocols]
user@switch# set iccp local-ip-addr local-ip-address
```

For example:

```
[edit protocols]
user@switch# set iccp local-ip-addr 3.3.3.1
```

- b. (Optional) Configure the IP address of the switch and the time during which an ICCP connection must succeed between the switches hosting the MC-LAG.

Configured session establishment hold time results in faster ICCP connection establishment. The recommended value is 50 seconds.

```
[edit protocols]
user@switch# set iccp peer peer-ip-address session-establishment-hold-time seconds
```

For example:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.2 session-establishment-hold-time 50
```

- c. (Optional) Configure the IP address to be used for backup liveness detection:





**NOTE:** By default, backup liveness detection is not enabled. Configure backup liveness detection if you require minimal traffic loss during a reboot. Backup liveness detection helps achieve sub-second traffic loss during an MC-LAG reboot.

```
[edit protocols]
user@switch# set iccp peer peer-ip-address backup-liveness-detection backup-peer-ip
ip-address
```

For example:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.2 backup-liveness-detection backup-peer-ip
10.207.64.232
```

- d. Configure the minimum interval at which the switch must receive a reply from the other switch with which it has established a Bidirectional Forwarding Detection (BFD) session.



**NOTE:** Configuring the minimum receive interval is required to enable BFD.

```
[edit protocols]
user@switch# set iccp peer peer-ip-address liveness-detection minimum-receive-interval
seconds
```

For example:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.2 liveness-detection minimum-receive-interval 60
```

- e. Configure the minimum transmit interval during which a switch must receive a reply from a switch with which it has established a BFD session.

```
[edit protocols]
user@switch# set iccp peer peer-ip-address liveness-detection transmit-interval
minimum-interval seconds
```

For example:

```
[edit protocols]
user@switch# set iccp peer 3.3.3.2 liveness-detection transmit-interval minimum-interval
60
```

8. Configure a multichassis protection link between the switches.

```
[edit]
user@switch# set multi-chassis multi-chassis-protection peer-ip-address interface
interface-name
```

For example:

```
[edit protocols]
user@switch# set multi-chassis multi-chassis-protection 3.3.3.1 interface ae0
```

9. Enable RSTP globally on all interfaces.

```
[edit]
user@switch# set protocols rstp interface all mode point-to-point
```

10. Disable RSTP on the ICL-PL interfaces on both switches.



```
[edit]
user@switch# set protocols rstp interface interface-name disable
```

For example:

```
[edit]
user@switch# set protocols rstp interface ae0.0 disable
```

11. Configure the MC-LAG interfaces as edge ports on both switches.

```
set protocols rstp interface interface-name
```

For example:

```
[edit]
user@switch# set protocols rstp interface ae1.0
```

12. Enable BPDU block on all interfaces except for the ICL-PL interfaces on both switches.

```
[edit]
user@switch# set protocols rstp bpdu-block-on-edge
```

For example:

```
[edit]
user@switch# set protocols rstp bpdu-block-on-edge
```

#### Related Documentation

- [Understanding Multichassis Link Aggregation on page 1931](#)
- [Example: Configuring Multichassis Link Aggregation on page 1958](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast using MAC Address Synchronization on page 1995](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using Virtual Router Redundancy Protocol \(VRRP\) on page 2011](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on page 1972](#)

## Configuring the QSFP+ Port Type on QFX3500 Standalone Switches

By default, the four 40-Gbps QSFP+ ports are configured to operate as 10-Gigabit Ethernet (xe) ports. You can use QSFP+ to four SFP+ breakout cables or QSFP+ transceivers with fiber breakout cables to connect the 10-Gigabit Ethernet ports to other servers, storage, and switches. You can, however, configure the four 40-Gbps QSFP+ ports to operate as 40-Gigabit Ethernet (xle) ports.



**NOTE:** Port Q0 supports only three (not the typical four) 10-Gigabit Ethernet ports, because one port is reserved.



**CAUTION:** The Packet Forwarding Engine on the QFX3500 standalone switch is restarted when you commit port type configuration changes (for example, configuring or deleting an xle port). As a result, you might experience packet loss on the device.



The following steps describe how to configure either a block of ports or an individual port to operate as 40-Gigabit Ethernet (xle) ports, as well as how to delete a 40-Gigabit Ethernet (xle) configuration.



**NOTE:** When you delete an xle block of ports or individual port, the ports return to operating as 10-Gigabit Ethernet ports.

1. To configure a block of ports to operate as 40-Gigabit Ethernet (xle) ports, specify a port range:

```
[edit chassis fpc 0 pic 2]
user@switch# set xle port-range port-range-low port-range-high
```

For example, to configure ports Q0 through Q3 to operate as 40-Gigabit Ethernet ports:

```
[edit chassis fpc 0 pic 2]
user@switch# set xle port-range 0 3
```

2. To configure an individual port to operate as a 40-Gigabit Ethernet (xle) port, specify a port number:

```
[edit chassis fpc 0 pic 2]
user@switch# set xle port port-number
```

For example, to configure port Q2 to operate as a 40-Gigabit Ethernet port:

```
[edit chassis fpc 0 pic 2]
user@switch# set xle port 2
```

3. Review your configuration and issue the **commit** command.

```
[edit]
user@switch# commit
commit complete
```

4. To delete a block of ports configured as 40-Gigabit Ethernet (xle) ports (and return to the default 10-Gigabit Ethernet configuration), specify a port range:

```
[edit chassis fpc 0 pic 2]
user@switch# delete xle port-range port-range-low port-range-high
```

For example, to delete the 40-Gigabit Ethernet (xle) port configuration for ports Q0 through Q3 (and return to the default 10-Gigabit Ethernet configuration):

```
[edit chassis fpc 0 pic 2]
user@switch# delete xle port-range 0 3
```

5. To delete an individual port configured as a 40-Gigabit Ethernet (xle) port (and return to the default 10-Gigabit Ethernet configuration), specify an individual port:

```
[edit chassis fpc 0 pic 2]
user@switch# delete xle port port-number
```

For example, to delete the 40-Gigabit Ethernet (xle) port configuration for port Q2 (and return to the default 10-Gigabit Ethernet configuration):

```
[edit chassis fpc 0 pic 2]
user@switch# delete xle port 2
```



- Review your configuration and issue the **commit** command.

```
[edit]
user@switch# commit
commit complete
```

**Related  
Documentation**

- [Understanding Interface Naming Conventions on page 1915](#)
- [pic on page 2106](#)

## Configuring the Port Type on QFX3600 Standalone Switches

The QFX3600 standalone switch provides 16 40-Gbps QSFP+ ports. By default, all 16 ports operate as 40-Gigabit Ethernet (xle) ports. Optionally, you can choose to configure the 40-Gbps ports to operate as four 10-Gigabit Ethernet (xe) ports. You can use QSFP+ to four SFP+ breakout cables or QSFP+ transceivers with fiber breakout cables to connect the 10-Gigabit Ethernet ports to other servers, storage, and switches.



**NOTE:** Port Q0 supports only three (not the typical four) 10-Gigabit Ethernet ports, because one port is reserved. Therefore, you can configure up to 63 (not 64) 10-Gigabit Ethernet ports on ports Q0 through Q15.

This topic explains how to configure the port type on QFX3600 standalone switches.



**CAUTION:** The Packet Forwarding Engine on the QFX3600 standalone switch is restarted when you commit the port type configuration changes. As a result, you might experience packet loss on the switch.

The following message may be displayed in the system log file when the Packet Forwarding Engine is restarted. You can ignore this message.

Pipe write error: Broken pipe

flush operation failed

The following steps describe how to configure either a block of ports or an individual port to operate as 10-Gigabit Ethernet (xe) ports, as well as how to delete a 10-Gigabit Ethernet (xe) port configuration.



**NOTE:** When you delete the xe port type configuration for an individual port or a block of ports, the ports return to operating as 40-Gigabit Ethernet (xle) ports.

- To configure a block of ports to operate as 10-Gigabit Ethernet (xe) ports, specify a port range:

```
[edit chassis fpc 0 pic 0]
```



```
user@switch# set xe port-range port-range-low port-range-high
```

For example, to configure ports Q4 through Q7 to operate as 10-Gigabit Ethernet ports:

```
[edit chassis fpc 0 pic 0]  
user@switch# set xe port-range 4 7
```

2. To configure an individual port to operate as a 10-Gigabit Ethernet (xe) port, specify a port number:

```
[edit chassis fpc 0 pic 0]  
user@switch# set xe port port-number
```

For example, to configure port Q4 to operate as a 10-Gigabit Ethernet port:

```
[edit chassis fpc 0 pic 0]  
user@switch# set xe port 4
```

3. Review your configuration and issue the **commit** command.

```
[edit chassis fpc 0 pic 0]  
user@switch# commit  
commit complete
```

4. To delete the 10-Gigabit Ethernet (xe) port configuration for a block of ports (and return to the default 40-Gigabit Ethernet configuration), specify a port range:

```
[edit chassis fpc 0 pic 0]  
user@switch# delete xe port-range port-range-low port-range-high
```

For example, to delete the 10-Gigabit Ethernet port configuration for ports Q4 through Q7:

```
[edit chassis fpc 0 pic 0]  
user@switch# delete xe port-range 4 7
```

5. To delete the 10-Gigabit Ethernet (xe) port configuration for an individual port (and return to the default 40-Gigabit Ethernet configuration), specify a port number:

```
[edit chassis fpc 0 pic 0]  
user@switch# delete xe port port-number
```

For example, to delete the 10-Gigabit Ethernet port configuration for port Q4:

```
[edit chassis fpc 0 pic 0]  
user@switch# delete xe port 4
```

**Related  
Documentation**

- [Understanding Interface Naming Conventions on page 1915](#)
- [pic on page 2106](#)



## Configuration Statements

### 802.3ad

<b>Syntax</b>	<pre> 802.3ad aex;     lacp {         force-up;         primary;     } </pre>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">ether-options</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify the aggregated Ethernet logical interface number.
<b>Options</b>	<b>aex</b> —Aggregated Ethernet logical interface number.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Link Aggregation on page 2033</a></li> <li>• <a href="#">Configuring Aggregated Ethernet LACP on page 2030</a></li> <li>• <a href="#">Understanding Aggregated Ethernet Interfaces and LACP on page 1913</a></li> <li>• <a href="#">Troubleshooting an Aggregated Ethernet Interface on page 1107</a></li> <li>• Junos® OS Network Interfaces</li> </ul>



## address

```

Syntax  address address {
        arp ip-address (mac | multicast-mac) mac-address <publish>;
        broadcast address;
        destination address;
        destination-profile name;
        eui-64;
        master-only;
        multipoint-destination address dlcid dlcid-identifier;
        multipoint-destination address {
            epd-threshold cells;
            inverse-arp;
            oam-liveness {
                up-count cells;
                down-count cells;
            }
            oam-period (disable | seconds);
            shaping {
                (cbr rate | rtvbr peak rate sustained rate burst length | vbr peak rate sustained rate burst
                 length);
                queue-length number;
            }
            vci vpi-identifier.vci-identifier;
        }
        primary;
        preferred;
        (vrrp-group | vrrp-inet6-group) group-number {
            (accept-data | no-accept-data);
            advertise-interval seconds;
            authentication-type authentication;
            authentication-key key;
            fast-interval milliseconds;
            (preempt | no-preempt) {
                hold-time seconds;
            }
            priority-number number;
            track {
                priority-cost seconds;
                priority-hold-time interface-name {
                    interface priority;
                    bandwidth-threshold bits-per-second {
                        priority;
                    }
                }
            }
            route ip-address/mask routing-instance instance-name priority-cost cost;
        }
        virtual-address [ addresses ];
    }
}

```

**Hierarchy Level** [edit interfaces *interface-name* unit *logical-unit-number* family *family*],  
 [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number*  
 family *family*]



**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure the interface address.

**Options** *address*—Address of the interface.

The remaining statements are explained separately.



**NOTE:** The `edit logical-systems` hierarchy is not available on QFabric systems.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- Configuring the Protocol Family
- negotiate-address
- unnumbered-address (Ethernet)
- Junos OS System Basics Configuration Guide
- family



## aggregated-devices

---

<b>Syntax</b>	<pre>aggregated-devices {     ethernet {         device-count <i>number</i>;     } }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">chassis</a> ], [edit <a href="#">chassis node-group name</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure properties for aggregated devices on the switch.  The remaining statements are explained separately.
<b>Default</b>	Aggregated devices are disabled.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding Aggregated Ethernet Interfaces and LACP on page 1913</a></li><li>• <a href="#">Configuring Link Aggregation on page 2033</a></li><li>• <a href="#">Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch on page 1950</a></li><li>• <a href="#">Junos® OS Network Interfaces</a></li></ul>



## aggregated-ether-options

```
Syntax  aggregated-ether-options {
        configured-flow-control {
            rx-buffers (on | off);
            tx-buffers (on | off);
        }
        ethernet-switch-profile {
            tag-protocol-id;
            (flow-control | no-flow-control);
            lacp mode {
                admin-key key;
                periodic interval;
                system-id mac-address;
            }
        }
        (link-protection | no-link-protection);
        link-speed speed;
        (loopback | no-loopback);
        mc-ae {
            chassis-id chassis-id;
            mc-ae-id mc-ae-id;
            mode (active-active);
            status-control (active | standby);
        }
        minimum-links number;
        rebalance-periodic;
        source-address-filter filter;
        (source-filtering | no-source-filtering);
    }
```

**Hierarchy Level** [edit [interfaces](#) *aex*]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure properties specific to a specific aggregated Ethernet interface.

The statements are explained separately.

**Default** Options are not enabled.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Understanding Aggregated Ethernet Interfaces and LACP on page 1913](#)
- [Configuring Aggregated Ethernet LACP on page 2030](#)
- [Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch on page 1954](#)
- [Junos® OS Network Interfaces](#)



## alarm (chassis)

---

Syntax	<pre>alarm {     interface-type {         alarm-name (ignore   red   yellow);     } }</pre>
Hierarchy Level	[edit chassis], [edit chassis <b>interconnect-device</b> name], [edit chassis <b>node-group</b> name]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 11.1 for the QFX Series. Statement introduced in Junos OS Release 12.2 for the ACX Series.
Description	<p>Configure the chassis alarms and whether they trigger a red or yellow alarm, or whether they are ignored. Red alarm conditions light the <b>RED ALARM</b> LED on either the router's craft interface or the switch's LCD screen and trigger an audible alarm if one is connected to the contact on the craft interface or LCD screen. Yellow alarm conditions light the <b>YELLOW ALARM</b> LED on either the router's craft interface or the switch's LCD screen and trigger an audible alarm if one is connected to the craft interface or LCD screen.</p> <p>To configure more than one alarm, include multiple <b>alarm-name</b> lines.</p>
Options	<p><b>alarm-name</b>—Alarm condition. For a list of conditions, see System-Wide Alarms and Alarms for Each Interface Type.</p> <p><b>ignore</b>—The specified alarm condition does not set off any alarm.</p> <p><b>interface-type</b>—Type of interface on which you are configuring the alarm: <b>atm</b>, <b>ethernet</b>, <b>sonet</b>, or <b>t3</b>.</p> <p><b>red</b>—The specified alarm condition sets off a red alarm.</p> <p><b>yellow</b>—The specified alarm condition sets off a yellow alarm.</p>
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Understanding Alarms on page 5825</a></li><li>• Chassis Conditions That Trigger Alarms</li><li>• <a href="#">Chassis Alarm Messages on a QFX3500 Device on page 5826</a></li><li>• <a href="#">Interface Alarm Messages on page 5829</a></li></ul>



## authentication-key (ICCP)

<b>Syntax</b>	<code>authentication-key key;</code>
<b>Hierarchy Level</b>	<code>[edit protocols <b>iccp</b> peer &lt;peer-IP-address&gt;],</code> <code>[edit protocols <b>iccp</b>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Specify the authentication key (password). The QFX3500 device uses this password to verify the authenticity of packets sent from the peers hosting a multichassis link aggregation group (MC-LAG). Peer-level authentication takes precedence over global-level authentication.  Interchassis Control Protocol (ICCP) uses MD5 authentication.
<b>Options</b>	<b>key</b> —Authentication password. It can be 1 through 16 contiguous digits or letters. Separate decimal digits with periods. Separate hexadecimal digits with periods and precede the string with 0x. If you include spaces in the password, enclose the entire password in quotation marks (" ").
<b>Required Privilege Level</b>	<b>routing</b> —To view this statement in the configuration. <b>routing-control</b> —To add this statement to the configuration.

## backup-liveness-detection

<b>Syntax</b>	<code>backup-liveness-detection {</code> <code>    <b>backup-peer-ip</b> ip4-address</code>
<b>Hierarchy Level</b>	<code>[edit protocols <b>iccp</b> peer]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Backup liveness detection determines the peer status (whether it is up or down) by exchanging keep alive messages (UDP-based packets) over the management link between the two Interchassis Control Protocol (ICCP) peers. When an ICCP connection is operationally down, the status of the peers hosting a multichassis link aggregation group (MC-LAG) is detected by sending liveness detection requests to each other. Peers must respond to liveness detection requests within a specified amount of time. If the responses are not received within that time for a given number of consecutive attempts, the liveness detection check fails, and a failure action is implemented. Backup liveness detection must be configured on both peers hosting the MC-LAG.
<b>Required Privilege Level</b>	<b>routing</b> —To view this statement in the configuration. <b>routing-control</b> —To add this statement to the configuration.



## backup-peer-ip

---

<b>Syntax</b>	<code>backup-peer-ip <i>ip4-address</i></code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">iccp peer backup-liveness-detection</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Specify the IP address of the peer being used as a backup peer in the Bidirectional Forwarding Detection (BFD) configuration.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.



## chassis

```
Syntax  chassis {
        routing-engine {
        on-disk-failure {
            disk-failure-action (halt | reboot);
        }
        aggregated-devices {
            ethernet {
                device-count number;
            }
            alarm {
                interface-type {
                    alarm-name (red | yellow | ignore);
                }
            }
        }
        fpc slot {
            pic pic-number {
                fibre-channel {
                    port-range {
                        port-range-low port-range-high;
                    }
                }
                xe {
                    (port port-number | port-range port-range-low port-range-high);
                }
                xle {
                    (port port-number | port-range port-range-low port-range-high);
                }
            }
        }
    }
```

Hierarchy Level [\[edit\]](#)

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure chassis-specific properties for the switch.

The remaining statements are explained separately.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring Link Aggregation on page 2033](#)



## chassis (QFabric System)

---

```
Syntax  chassis {
        interconnect-device {
            alarm {
                (ethernet | management-ethernet) {
                    link-down (red | yellow | ignore);
                }
            }
            container-devices {
                device-count number;
            }
            craft-lockout {
                alarm {
                    interface-type {
                        link-down (red | yellow | ignore);
                    }
                }
            }
            container-devices {
                device-count number;
            }
            fpc slot {
                power (on | off);
            }
            routing-engine {
                on-disk-failure {
                    disk-failure-action (halt | reboot);
                }
            }
        }
        fpc slot {
            power (on | off);
        }
        routing-engine {
            on-disk-failure {
                disk-failure-action (halt | reboot);
            }
        }
    }
    node-group name {
        aggregated-devices {
            ethernet {
                device-count number;
            }
        }
        alarm {
            interface-type {
                link-down (ignore | red | yellow);
            }
        }
        container-devices {
            device-count number;
        }
        node-device name {
```



```

    fibre-channel {
        port-range {
            port-range-low port-range-high;
        }
    }
    pic pic-number {
        fte {
            port port-number;
            port-range port-range-low port-range-high;
        }
        xe {
            port port-number;
            port-range port-range-low port-range-high;
        }
    }
}
}
routing-engine {
    on-disk-failure {
        disk-failure-action (halt | reboot);
    }
}
}
}

```

**Hierarchy Level** [\[edit\]](#)

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure chassis-specific properties for the switch.

The remaining statements are explained separately.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

## chassis-id

**Syntax** `chassis-id chassis-id;`

**Hierarchy Level** [\[edit\]](#)[interfaces aggregated-ether-options mc-ae](#)

**Release Information** Statement introduced in Junos OS Release 12.2 for the QFX Series.

**Description** Specify the chassis ID of the multichassis aggregated Ethernet interface device. LACP uses the chassis ID to calculate the port number of the multichassis link aggregation group (MC-LAG) physical member links.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.



## container-devices

---

<b>Syntax</b>	container-devices { device-count <i>number</i> ; }
<b>Hierarchy Level</b>	[edit chassis] [edit chassis interconnect-device <i>name</i> ] [edit chassis node-group <i>name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.3 for QFX Series switches.
<b>Description</b>	Specify the container devices configuration. The <b>number</b> option specifies the number of sequentially numbered container interfaces, from <b>ci0</b> to <b>ci127</b> maximum.
<b>Options</b>	<b>number</b> —Number of container devices. <b>Range:</b> 1 through 128
<b>Required Privilege Level</b>	chassis—To view this statement in the configuration. chassis-control—To add this statement to the configuration.



## craft-lockout

```

Syntax  craft-lockout {
        alarm {
            interface-type {
                link-down (red | yellow | ignore);
            }
        }
        container-devices {
            device-count number;
        }
        fpc slot {
            pic pic-number {
                fibre-channel {
                    port-range {
                        port-range-low port-range-high;
                    }
                }
            }
        }
        routing-engine {
            on-disk-failure {
                disk-failure-action (halt | reboot);
            }
        }
    }

```

**Hierarchy Level** [edit [chassis interconnect-device](#)]

**Release Information** Statement introduced in Junos Release 11.3 for the QFX Series.

**Description** Disable the physical operation of the craft interface front panel.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- Configuring the Junos OS to Disable the Physical Operation of the Craft Interface



## description (Interfaces)

---

<b>Syntax</b>	<code>description text;</code>
<b>Hierarchy Level</b>	<code>[edit <b>interfaces</b> <i>interface-name</i>],</code> <code>[edit <b>interfaces</b> <i>interface-name</i> unit <i>logical-unit-number</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i>]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.1 for the QFX Series. Statement introduced in Junos OS Release 12.2 for ACX Series Universal Access Routers.
<b>Description</b>	<p>Provide a textual description of the interface or the logical unit. Any descriptive text you include is displayed in the output of the <b>show interfaces</b> commands, and is also exposed in the <b>ifAlias</b> Management Information Base (MIB) object. It has no effect on the operation of the interface on the router or switch.</p> <p>The textual description can also be included in the extended DHCP relay option 82 Agent Circuit ID suboption.</p>
<b>Options</b>	<b>text</b> —Text to describe the interface. If the text includes spaces, enclose the entire text in quotation marks.
<b>Required Privilege Level</b>	<b>interface</b> —To view this statement in the configuration. <b>interface-control</b> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Adding an Interface Description to the Configuration</li><li>• Adding a Logical Unit Description to the Configuration</li><li>• Configuring Gigabit Ethernet Interfaces (CLI Procedure)</li><li>• <a href="#">Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029</a></li><li>• Enabling and Disabling Insertion of Option 82 Information</li><li>• Junos® OS Network Interfaces</li></ul>



## detection-time (Liveness Detection)

---

<b>Syntax</b>	<code>detection-time {     <i>milliseconds</i>; }</code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">iccp peer liveness-detection</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	<p>The Bidirectional Forwarding Detection (BFD) timers are adaptive and can be adjusted to be faster or slower.</p> <p>The remaining statement is explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>

## device-count

---

<b>Syntax</b>	<code>device-count <i>number</i>;</code>
<b>Hierarchy Level</b>	<p>[edit <a href="#">chassis aggregated-devices ethernet</a>],</p> <p>[edit <a href="#">chassis node-group <i>name</i> aggregated-devices ethernet</a>]</p>
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the number of aggregated Ethernet logical devices available to the switch.
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Link Aggregation on page 2033</a></li> <li>• <a href="#">Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch on page 1950</a></li> </ul>



## disk-failure-action

---

<b>Syntax</b>	disk-failure-action (halt   reboot);
<b>Hierarchy Level</b>	[edit chassis routing-engine on-disk-failure], [edit chassis <a href="#">node-group name</a> routing-engine on-disk-failure], [edit chassis <a href="#">interconnect-device name</a> routing-engine on-disk-failure]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Halt or reboot when the Routing Engine hard disk fails.
<b>Options</b>	<b>halt</b> —Stop the Routing Engine.  <b>reboot</b> —Reboot the Routing Engine.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring the Junos OS to Enable a Routing Engine to Reboot on Hard Disk Errors</a></li></ul>

## ethernet

---

<b>Syntax</b>	ethernet { <a href="#">device-count</a> <i>number</i> ; }
<b>Hierarchy Level</b>	[edit <a href="#">chassis aggregated-devices</a> ], [edit chassis <a href="#">node-group aggregated-devices</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure properties for aggregated Ethernet devices on the switch.  The remaining statement is explained separately.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Link Aggregation on page 2033</a></li><li>• <a href="#">Junos® OS Network Interfaces</a></li></ul>



---

## ethernet (Alarm)

---

<b>Syntax</b>	ethernet { <a href="#">link-down</a> (red   yellow   ignore); }
<b>Hierarchy Level</b>	[edit chassis <a href="#">alarm</a> ], [edit chassis <a href="#">interconnect-device</a> <i>name</i> <a href="#">alarm</a> ], [edit chassis <a href="#">node-group</a> <i>name</i> <a href="#">alarm</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure alarms for an Ethernet interface.
<b>Options</b>	The remaining statement is explained separately.—
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding Alarms on page 5825</a></li><li>• <a href="#">Interface Alarm Messages on page 5829</a></li></ul>



## ethernet-switching

---

**Syntax** ethernet-switching {  
    `filter` input *filter-name*;  
    `filter` output *filter-name*;  
    `native-vlan-id` *vlan-id*;  
    `port-mode` *mode*;  
    `reflective-relay`;  
    vlan {  
        `members` [ (all | *names* | *vlan-ids*) ];  
    }  
}

**Hierarchy Level** [edit `interfaces` *ge-chassis/slot/port unit logical-unit-number*] family

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure Ethernet switching protocol family information for the logical interface.  
  
The remaining statements are explained separately.

**Default** You must configure a logical interface to be able to use the physical device.

**Required Privilege** interface—To view this statement in the configuration.  
**Level** interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029](#)
- [JUNOS Software Network Interfaces Configuration Guide](#)



## ether-options

<b>Syntax</b>	<pre>ether-options {   802.3ad aex {     lacp {       primary;       force-up;     }   }   (auto-negotiation  no-auto-negotiation);   configured-flow-control {     rx-buffers (on   off);     tx-buffers (on   off);   }   (flow-control   no-flow-control);   link-mode mode;   (loopback   no-loopback);   speed (auto-negotiation   no-auto-negotiation); }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Configure <b>ether-options</b> properties for a Gigabit Ethernet or 10-Gigabit Ethernet interface.</p> <p>The statements are explained separately.</p>
<b>Default</b>	Enabled.
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029</a></li> <li>• Junos® OS Network Interfaces</li> </ul>



## eui-64

---

<b>Syntax</b>	eui-64;
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> unit <i>number</i> family inet6 address <i>address</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.3 for EX Series switches. Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	For interfaces that carry IP version 6 (IPv6) traffic, automatically generate the host number portion of interface addresses. Not supported on QFX Series switches.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring the Interface Address on page 1545</a></li></ul>



## family

```
Syntax  family {
        ethernet-switching {
            filter input filter-name;
            filter output filter-name;
            native-vlan-id vlan-id;
            port-mode mode;
            vlan {
                members [ (all | names | vlan-ids) ];
            }
        }
        fibre-channel {
            port-mode (f-port | np-port);
        }
        inet {
            address address {
                primary;
            }
            filter input filter-name;
            filter output filter-name;
            targeted-broadcast;
        }
        inet6 {
            address address {
                eui-64
                preferred
                primary;
            }
            filter input filter-name;
            filter output filter-name;
        }
    }
```

**Hierarchy Level** [edit [interfaces interface-name unit logical-unit-number](#)],  
[edit [interfaces interface-range interface-name unit logical-unit-number family](#)]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure protocol family information for the logical interface on the QFX Series product.

**Default** Access interfaces on the QFX Series are set to **family ethernet-switching** by default. If you are going to change the family setting for an interface, you might have to delete this default setting or any user-configured family setting first.

You must configure a logical interface to be able to use the physical device.

**Options** See [Table 158 on page 2064](#) for protocol families available on the QFX Series interfaces. Different protocol families support different subsets of the interface types on the QFX Series.

Interface types on the switch are:

- Aggregated Ethernet (**ae**)



- Gigabit Ethernet (**ge**)
- Loopback (**lo0**)
- Management Ethernet (**me0**)
- Routed VLAN interface (RVI) (**vlan**)
- 10-Gigabit Ethernet (**xe**)

Not all interface types support all **family** substatements. Check your switch CLI for supported substatements for a particular protocol family configuration.

**Table 158: Protocol Families and Supported Interface Types**

Family	Description	Supported Interface Types					
		ae	lo0	me0	vlan	ge	xe
ethernet-switching	Ethernet switching protocol family	✓		✓	✓	✓	✓
fibre-channel	Fibre Channel protocol family	✓			✓		✓
inet	IPv4 protocol family	✓	✓	✓	✓	✓	✓

The remaining statements are explained separately.

<b>Required Privilege Level</b>	interface—To view this statement in the configuration.
	interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029</a></li> <li>• <a href="#">Configuring Link Aggregation on page 2033</a></li> <li>• <a href="#">Configuring Routed VLAN Interfaces on page 1551</a></li> <li>• Junos® OS Network Interfaces</li> </ul>



---

## fibre-channel (Alarm)

---

<b>Syntax</b>	fibre-channel { <a href="#">link-down</a> (red   yellow   ignore); }
<b>Hierarchy Level</b>	[edit chassis <a href="#">alarm</a> ], [edit chassis <a href="#">interconnect-device</a> <i>name</i> <a href="#">alarm</a> ], [edit chassis <a href="#">node-group</a> <i>name</i> <a href="#">alarm</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Configure alarms for a Fibre Channel interface.
<b>Options</b>	The remaining statement is explained separately.—
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding Alarms on page 5825</a></li><li>• <a href="#">Interface Alarm Messages on page 5829</a></li></ul>



## flow-control

<b>Syntax</b>	(flow-control   no-flow-control);
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">ether-options</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Explicitly enable or disable symmetric Ethernet PAUSE flow control, which regulates the flow of packets from the switch to the remote side of the connection by pausing all traffic flows on a link during periods of network congestion. Symmetric flow control means that Ethernet PAUSE is enabled in both directions. The interface generates and sends Ethernet PAUSE messages when the receive buffers fill to a certain threshold and the interface responds to PAUSE messages received from the connected peer. By default, flow control is disabled.</p> <p>You can configure asymmetric flow control by including the <b>configured-flow-control</b> statement at the [edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">ether-options</a> hierarchy level. Symmetric flow control and asymmetric flow control are mutually exclusive features. If you attempt to configure both, the switch returns a commit error.</p> <div data-bbox="474 966 542 1035" data-label="Image"> </div> <p><b>NOTE:</b> Ethernet PAUSE temporarily stops transmitting all traffic on a link when the buffers fill to a certain threshold. To temporarily pause traffic on individual “lanes” of traffic (each lane contains the traffic associated with a particular IEEE 802.1p code point, so there can be eight lanes of traffic on a link), use priority-based flow control (PFC).</p> <p>Ethernet PAUSE and PFC are mutually exclusive features, so you cannot configure both of them on the same interface. If you attempt to configure both Ethernet PAUSE and PFC on an interface, the switch returns a commit error.</p>
	<ul style="list-style-type: none"> <li>• <b>flow-control</b>—Enable flow control; flow control is useful when the remote device is a Gigabit Ethernet switch.</li> <li>• <b>no-flow-control</b>—Disable flow control.</li> </ul>
<b>Default</b>	Flow control is disabled.
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">configured-flow-control on page 5191</a></li> <li>• <a href="#">Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029</a></li> <li>• <a href="#">Understanding CoS Flow Control (Ethernet PAUSE and PFC) on page 4476</a></li> <li>• <a href="#">Junos® OS Network Interfaces</a></li> </ul>



---

## force-up

---

<b>Syntax</b>	force-up;
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">ether-options</a> 802.3ad lacp]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Set the state of the interface as up when the peer has limited LACP capability.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding Aggregated Ethernet Interfaces and LACP on page 1913</a></li><li>• <a href="#">Configuring Aggregated Ethernet LACP on page 2030</a></li><li>• <a href="#">Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch on page 1954</a></li><li>• <a href="#">Junos® OS Network Interfaces</a></li></ul>



## fpc

---

<b>Syntax</b>	<pre>fpc slot {   pic <i>pic-number</i> {     fibre-channel {       port-range {         <i>port-range-low port-range-high</i>;       }     }     xe {       (<i>port port-number</i>   <i>port-range port-range-low port-range-high</i>);     }     xle {       (<i>port port-number</i>   <i>port-range port-range-low port-range-high</i>);     }   } }</pre>
<b>Hierarchy Level</b>	[edit chassis], [edit chassis <i>interconnect-device name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the FPC slot number. For QFX3500 switches, the slot is a line card slot.
<b>Options</b>	<p><i>slot</i>—Number of the FPC slot. For QFX3500 and QFX3600 devices, the slot number is always 0.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show chassis fpc on page 599</a></li></ul>



## fpc (Interconnect Device)

<b>Syntax</b>	<code>fpc slot {     power (on   off); }</code>
<b>Hierarchy Level</b>	[edit chassis] [edit chassis <a href="#">interconnect-device</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the FPC slot number.
<b>Options</b>	<b>slot</b> —Number of the FPC slot. For QFX3500 switches, the slot number is always 0.  The remaining statements are explained separately.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	

## gratuitous-arp-reply

<b>Syntax</b>	<code>(gratuitous-arp-reply   no-gratuitous-arp-reply);</code>
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> ], [edit interfaces <a href="#">interface-range</a> <i>interface-range-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Enable processing of ARP updates received via gratuitous ARP reply messages.
<b>Default</b>	Updating of the ARP cache is disabled on all Ethernet interfaces.
<b>Options</b>	<b>gratuitous-arp-reply</b> —Update the ARP cache.  <b>no-gratuitous-arp-reply</b> —Do not update the ARP cache.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.




## group

---

<b>Syntax</b>	<pre>group group-name {     link-to-monitor interface-name;     link-to-disable interface-name; }</pre>
<b>Hierarchy Level</b>	[edit protocols uplink-failure-detection]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure a group of uplink and downlink interfaces for uplink failure detection.
<b>Options</b>	<p><i>group-name</i>—Name of the uplink failure detection group.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Overview of Uplink Failure Detection on page 1941</a></li><li>• <a href="#">Configuring Interfaces for Uplink Failure Detection on page 2032</a></li><li>• <a href="#">Example: Configuring Interfaces for Uplink Failure Detection on page 1945</a></li></ul>



## hold-time (Physical Interface)

<b>Syntax</b>	<code>hold-time up <i>milliseconds</i> down <i>milliseconds</i>;</code>
<b>Hierarchy Level</b>	<code>[edit <b>interfaces</b> <i>interface-name</i>],</code> <code>[edit <b>interfaces</b> <i>interface-range</i> <i>interface-range-name</i>]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 10.4R5 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series. Statement introduced in Junos OS Release 12.2 for ACX Series Universal Access Routers.
<b>Description</b>	Specify the hold-time value to use to damp interface transitions. When an interface goes from up to down, it is not advertised to the rest of the system as being down until it has remained down for the hold-time period. Similarly, an interface is not advertised as being up until it has remained up for the hold-time period.
	<div>  <p><b>NOTE:</b></p> <ul style="list-style-type: none"> <li>We recommend that you configure the hold-time value after determining an appropriate value by performing repeated tests in the actual hardware environment. This is because the appropriate value for hold-time depends on the hardware (XFP, SFP, SR, ER, or LR) used in the networking environment.</li> <li>The hold-time option is not available for controller interfaces.</li> </ul> </div>
<b>Default</b>	Interface transitions are not damped.
<b>Options</b>	<p><b>down <i>milliseconds</i></b>—Hold time to use when an interface transitions from up to down. Junos OS advertises the transition within 100 milliseconds of the time value you specify.</p> <p><b>Range:</b> 0 through 4,294,967,295 milliseconds</p> <p><b>Default:</b> 0 milliseconds (interface transitions are not damped)</p> <p><b>up <i>milliseconds</i></b>—Hold time to use when an interface transitions from down to up. Junos OS advertises the transition within 100 milliseconds of the time value you specify.</p> <p><b>Range:</b> 0 through 4,294,967,295 milliseconds</p> <p><b>Default:</b> 0 milliseconds (interface transitions are not damped)</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>advertise-interval</li> <li>interfaces (for EX Series switches)</li> </ul>



## iccp

```
Syntax  iccp {
    authentication-key string;
    local-ip-addr local-ip-addr;
    peer ip-address{
        authentication-key string;
        backup-liveness-detection {
            backup-peer-ip ip-address;;
        }
        liveness-detection {
            detection-time {
                threshold milliseconds;
            }
            minimum-interval milliseconds;
            minimum-receive-interval milliseconds;
            multiplier number;
            no-adaptation;
            transmit-interval {
                minimum-interval milliseconds;
                threshold milliseconds;
            }
            version (1 | automatic);
        }
        local-ip-addr ipv4-address;
        session-establishment-hold-time seconds;
    }
    session-establishment-hold-time seconds;
    traceoptions {
        file <filename> <files number> <match regular-expression> <microsecond-stamp>
        <size size> <world-readable | no-world-readable>;
        flag flag;
        no-remote-trace;
    }
}
```

**Hierarchy Level** [edit protocols]

**Release Information** Statement introduced in Junos OS Release 12.2 for the QFX Series.

**Description** Configure Interchassis Control Protocol (ICCP) between the multichassis link aggregation group (MC-LAG) peers. ICCP replicates forwarding information, validates configurations, and propagates the operational state of the MC-LAG members.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.



## inet (interfaces)

---

<b>Syntax</b>	<pre>inet {     address <i>address</i> {         primary;         filter input <i>filter-name</i>;         filter output <i>filter-name</i>;         targeted-broadcast;     } }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces interface-name unit logical-unit-number family</a> ], [edit <a href="#">interfaces interface-range interface-name unit logical-unit-number family</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the primary IP address for the logical interface.
<b>Default</b>	You must configure a logical interface to be able to use the physical device.
<b>Options</b>	The remaining statements are explained separately.—
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029</a></li> </ul>



## inet6 (interfaces)

---

<b>Syntax</b>	<pre>inet6 {     address address {         eui-64         preferred         primary;         filter input filter-name;         filter output filter-name;     } }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces interface-name unit logical-unit-number</a> family], [edit <a href="#">interfaces interface-range interface-name unit logical-unit-number</a> family]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Configure the primary IP address for the logical interface.
<b>Default</b>	You must configure a logical interface to be able to use the physical device.
<b>Options</b>	The remaining statements are explained separately.—
<b>Required Privilege Level</b>	interface—To view this statement in the configuration.interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029</a></li></ul>



## interconnect-device (Chassis)

```
Syntax interconnect-device {
    alarm {
        (ethernet | management-ethernet) {
            link-down (red | yellow | ignore);
        }
    }
    container-devices {
        device-count number;
    }
    craft-lockout {
        alarm {
            interface-type {
                link-down (red | yellow | ignore);
            }
        }
        container-devices {
            device-count number;
        }
    }
    fpc slot {
        power (on | off);
    }
    routing-engine {
        on-disk-failure {
            disk-failure-action (halt | reboot);
        }
    }
    fpc slot {
        power (on | off);
    }
    routing-engine {
        on-disk-failure {
            disk-failure-action (halt | reboot);
        }
    }
}
```

**Hierarchy Level** [edit chassis]

**Release Information** Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Configure properties specific to a QFabric system Interconnect device.

The remaining statements are explained separately.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- Understanding Interconnect Devices



## interface-range

**Syntax** `interface-range interface-range-name {`  
     `disable;`  
     `description text;`  
     `ether-options {`  
         `802.3ad aex {`  
             `lacp {`  
                 `force-up;`  
             `}`  
         `}`  
     `(auto-negotiation| no-auto-negotiation);`  
     `(flow-control | no-flow-control);`  
     `link-mode mode;`  
     `speed (auto-negotiation | speed);`  
     `}`  
     `hold-time milliseconds down milliseconds;`  
     `member interface-name;`  
     `member-range starting-interface-name to ending-interface-name;`  
     `mtu bytes;`  
     `unit logical-unit-number {`  
         `description text;`  
         `disable;`  
         `family family-name {...}`  
         `(traps | no traps);`  
         `vlan-id vlan-id-number;`  
     `}`  
     `}`

**Hierarchy Level** [edit [interfaces](#)]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX series.

**Description** Group interfaces that share a common configuration profile.



**NOTE:** The interface range definition is supported only for Gigabit Ethernet, 10-Gigabit Ethernet, and Fibre Channel interfaces.

**Options** `interface-range-name`—Name of the interface range.



**NOTE:** You can use regular expressions and wildcards to specify the interfaces in the member range configuration. Do not use wildcards for interface types.

The remaining statements are explained separately.

**Required Privilege Level** `interface`—To view this statement in the configuration.  
     `interface-control`—To add this statement to the configuration.



- Related Documentation**
- [Understanding Interface Ranges on the QFX Series on page 1928](#)
  - [Interfaces Overview on page 1911](#)
  - [Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029](#)
  - Junos® OS Network Interfaces

---

## interface (Multichassis Protection)

---

<b>Syntax</b>	interface <i>interface-name</i> ;
<b>Hierarchy Level</b>	[edit <a href="#">multi-chassis multi-chassis-protection peer</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Specify the name of the interface that is being used as an interchassis link-protection link (ICL-PL). The two QFX3500 devices hosting a multichassis link aggregation group (MC-LAG) use this link to pass Interchassis Control Protocol (ICCP) and data traffic.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.



## interfaces

---

```
Syntax  interfaces {
        aex {
            disable;
            aggregated-ether-options {
                configured-flow-control {
                    rx-buffers (on | off);
                    tx-buffers (on | off);
                }
            }
            (flow-control | no-flow-control);
            lacp mode {
                admin-key key;
                periodic interval;
                system-id mac-address;
            }
            link-speed speed;
            loopback;
            no-loopback;
            minimum-links number;
        }
        mc-ae {
            chassis-id chassis-id;
            mc-ae-id mc-ae-id;
            mode (active-active);
            status-control (active | standby);
        }
        description text;
        gratuitous-arp-reply | no-gratuitous-arp-reply
        hold-time down milliseconds up milliseconds;
        mtu bytes;
        no-gratuitous-arp-request;
        traceoptions;
        (traps | no traps);
        unit logical-unit-number {
            disable;
            description text;
            family {
                ethernet-switching {
                    filter input filter-name;
                    filter output filter-name;
                    native-vlan-id vlan-id;
                    port-mode mode;
                    reflective-relay;
                    vlan {
                        members [ (all | names | vlan-ids) ];
                    }
                }
            }
            inet {
                address address {
                    primary;
                }
                filter input filter-name;
                filter output filter-name;
            }
        }
    }
```



```

        primary;
        targeted-broadcast;
    }
    (traps | no traps);
    vlan-id vlan-id-number;
}
vlan-tagging;
}
interface-range interface-range-name {
    disable;
    description text;
    ether-options {
        802.3ad aex {
            lacp {
                force-up;
            }
        }
    }
    (auto-negotiation | no-auto-negotiation);
    configured-flow-control {
        rx-buffers (on | off);
        tx-buffers (on | off);
    }
    (flow-control | no-flow-control);
    link-mode mode;
    speed (auto-negotiation | speed);
}
hold-time milliseconds down milliseconds;
member interface-name;
member-range starting-interface-name to ending-interface-name;
mtu bytes;
unit logical-unit-number {
    disable;
    description text;
    family family-name {...}
    (traps | no traps);
    vlan-id vlan-id-number;
}
}
lo0 {
    disable;
    description text;
    hold-time milliseconds down milliseconds;
    traceoptions;
    (traps | no traps);
    unit logical-unit-number {
        disable;
        description text;
        family {
            inet {
                address address {
                    primary;
                }
            }
            filter input filter-name;
            filter output filter-name;
            primary;
            targeted-broadcast;
        }
    }
}

```



```
    }
    (traps | no traps);
  }
}
mex {
  disable;
  description text;
  hold-time milliseconds down milliseconds;
  (gratuitous-arp-reply | no-gratuitous-arp-reply);
  no-gratuitous-arp-request;
  traceoptions;
  traps;
  unit logical-unit-number {
    disable;
  }
  description text;
  family {
    ethernet-switching {
      filter input filter-name;
      filter output filter-name;
      native-vlan-id vlan-id;
      port-mode mode;
      reflective-relay;
      vlan {
        members [ (all | names | vlan-ids) ];
      }
    }
  }
  inet {
    address address {
      primary;
      filter input filter-name;
      filter output filter-name;
      primary;
      targeted-broadcast;
    }
  }
  traps;
  vlan-id vlan-id-number;
}
vlan-tagging;
vlan {
  disable;
  description text;
  (gratuitous-arp-reply | no-gratuitous-arp-reply);
  hold-time milliseconds down milliseconds;
  mtu bytes;
  no-gratuitous-arp-request;
  traceoptions;
  (traps | no traps);
  unit logical-unit-number {
    description text;
    disable;
    family {
      inet {
        address address {
          primary;
        }
      }
    }
  }
}
```



```

        filter input filter-name;
        filter output filter-name;
        primary;
        targeted-broadcast;
    }
    (traps | no traps);
}
}
fc-0/0/port {
    fibrechannel-options {
        bb-sc-n;
        (loopback | no-loopback);
        speed (auto-negotiation | 2g | 4g | 8g);
    }
    unit logical-unit-number {
        disable;
        description text;
        family {
            fibre-channel {
                port-mode np-port;
            }
        }
        (traps | no traps);
    }
}
ge-0/0/port {
    disable;
    description text;
    ether-options {
        802.3ad aex {
            lacp {
                force-up;
                primary;
            }
        }
    }
    (auto-negotiation | no-auto-negotiation);
    configured-flow-control {
        rx-buffers (on | off);
        tx-buffers (on | off);
    }
    (flow-control | no-flow-control);
    link-mode mode;
    loopback;
    no-loopback;
    speed (auto-negotiation | speed);
}
gratuitous-arp-reply| no-gratuitous-arp-reply);
hold-time milliseconds down milliseconds;
mtu bytes;
no-gratuitous-arp-request;
traceoptions;
(traps | no traps);
unit logical-unit-number {
    description text;
    disable;
    family {
        ethernet-switching {
            filter input filter-name;

```



```
    filter output filter-name;  
    native-vlan-id vlan-id;  
    port-mode mode;  
    reflective-relay;  
    vlan {  
        members [ ( all | names | vlan-ids ) ];  
    }  
}  
inet {  
    address address {  
        primary;  
    }  
    filter input filter-name;  
    filter output filter-name;  
    primary;  
    targeted-broadcast;  
}  
(traps | no traps);  
vlan-id vlan-id-number;  
}  
vlan-tagging;  
}  
vrrp-group group-id {  
    (accept-data | no-accept-data);  
    advertise-interval seconds;  
    authentication-key key;  
    authentication-type authentication;  
    fast-interval milliseconds;  
    (preempt | no-preempt) {  
        hold-time seconds;  
    }  
    priority number;  
    track {  
        interface interface-name {  
            bandwidth-threshold bits-per-second priority-cost priority;  
            priority-cost priority;  
        }  
        priority-hold-time seconds;  
        route prefix/prefix-length routing-instance instance-name priority-cost priority;  
    }  
}  
virtual-address [ addresses ];  
}  
xe-0/0/port {  
    disable;  
    description text;  
    ether-options {  
        802.3ad aex {  
            lacp {  
                force-up;  
            }  
        }  
    }  
    configured-flow-control {  
        rx-buffers (on | off);  
        tx-buffers (on | off);  
    }  
}
```



```

(flow-control | no-flow-control);
loopback;
no-loopback;
}
(gratuitous-arp-reply | no-gratuitous-arp-reply
hold-time milliseconds down milliseconds;
mtu bytes;
no-gratuitous-arp-request;
traceoptions;
(traps | no traps);
unit logical-unit-number {
  disable;
  description text;
  family {
    ethernet-switching {
      filter input filter-name;
      filter output filter-name;
      native-vlan-id vlan-id;
      port-mode mode;
      reflective-relay;
      vlan {
        members [ (all | names | vlan-ids) ];
      }
    }
    fibre-channel {
      port-mode (f-port | np-port);
    }
    inet {
      address address {
        primary;
      }
      filter input filter-name;
      filter output filter-name;
      primary;
      targeted-broadcast;
    }
  }
  (traps | no traps);
  vlan-id vlan-id-number;
}
vlan-tagging;
}
}

```

Hierarchy Level [\[edit\]](#)

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure the interfaces on the QFX Series.

Most standard Junos OS configuration statements are available in the Junos OS for a switch. This topic lists Junos OS statements that you commonly use when configuring a switch as well as statements added to support switches only.



<b>Options</b>	<p><b>aex</b>—Configure an aggregated Ethernet interface.</p> <p><b>xe-0/0/</b><i>port</i>/<b>—</b>Configure a 10-Gigabit Ethernet interface.</p> <p><b>ge-0/0/</b><i>port</i>/<b>—</b>Configure a Gigabit Ethernet interface.</p> <p><b>fc-0/0/</b><i>port</i>/<b>—</b>Configure a Fibre Channel interface.</p> <p><b>meX/</b>—Configure a management interface.</p> <p><b>mc-ae</b>—Configure a multichassis aggregated Ethernet (MC-AE) interface.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Interfaces Overview on page 1911</a></li><li>• <a href="#">Understanding Interface Ranges on the QFX Series on page 1928</a></li><li>• <a href="#">Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029</a></li><li>• <a href="#">Configuring Link Aggregation on page 2033</a></li><li>• <a href="#">Configuring a Layer 3 Logical Interface on page 2033</a></li></ul>

---

## lacp (802.3ad)

---

<b>Syntax</b>	<pre>lacp {     force-up;     primary; }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">ether-options</a> 802.3ad]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the Link Aggregation Control Protocol (LACP) parameters for interfaces. The remaining statement is explained separately.
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Link Aggregation on page 2033</a></li><li>• <a href="#">Configuring Aggregated Ethernet LACP on page 2030</a></li><li>• <a href="#">Understanding Aggregated Ethernet Interfaces and LACP on page 1913</a></li></ul>



## lacp (Aggregated Ethernet)

<b>Syntax</b>	lacp (active   passive) { admin-key <i>key</i> ; periodic (fast   slow); system-ID <i>mac-address</i> ; }
<b>Hierarchy Level</b>	[edit <a href="#">interfaces interface-name</a> <a href="#">aggregated-ether-options</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the Link Aggregation Control Protocol (LACP) parameters for interfaces. The remaining statement is explained separately.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Link Aggregation on page 2033</a></li> <li>• <a href="#">Configuring Aggregated Ethernet LACP on page 2030</a></li> <li>• <a href="#">Understanding Aggregated Ethernet Interfaces and LACP on page 1913</a></li> </ul>

## link-to-disable

<b>Syntax</b>	link-to-disable <i>interface-name</i> ;
<b>Hierarchy Level</b>	[edit protocols uplink-failure-detection group <i>group-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure the downlink interfaces to be disabled when the switch detects an uplink failure. The switch can monitor a maximum of eight downlink interfaces in a group.
<b>Options</b>	<i>interface-name</i> —Name of the downlink interface in an uplink failure detection group. The interface can be a physical interface or a logical interface.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Overview of Uplink Failure Detection on page 1941</a></li> <li>• <a href="#">Configuring Interfaces for Uplink Failure Detection on page 2032</a></li> <li>• <a href="#">Example: Configuring Interfaces for Uplink Failure Detection on page 1945</a></li> </ul>



## link-to-monitor

---

<b>Syntax</b>	<code>link-to-monitor <i>interface-name</i>;</code>
<b>Hierarchy Level</b>	<code>[edit protocols uplink-failure-detection group <i>group-name</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure the uplink interfaces to be monitored for uplink failure detection. The switch can monitor a maximum of eight uplink interfaces in a group.
<b>Options</b>	<i>interface-name</i> —Name of the uplink interface in an uplink failure detection group. The interface can be a physical interface or a logical interface.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Overview of Uplink Failure Detection on page 1941</a></li><li>• <a href="#">Configuring Interfaces for Uplink Failure Detection on page 2032</a></li><li>• <a href="#">Example: Configuring Interfaces for Uplink Failure Detection on page 1945</a></li></ul>



---

## link-down

---

<b>Syntax</b>	link-down (red   yellow   ignore);
<b>Hierarchy Level</b>	[edit chassis <a href="#">alarm ethernet</a> ], [edit chassis <a href="#">alarm fibre-channel</a> ], [edit chassis <a href="#">interconnect-device</a> <i>name</i> <a href="#">alarm ethernet</a> ], [edit chassis <a href="#">node-group</a> <i>name</i> <a href="#">alarm fibre-channel</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Specify either red, yellow, or ignore to display when the link is down.
<b>Options</b>	<p><b>red</b>—Indicates that one or more hardware components have failed or exceeded temperature thresholds, or an alarm condition configured on an interface has triggered a critical warning.</p> <p><b>yellow</b>—Indicates a noncritical condition on the device that, if left unchecked, might cause an interruption in service or degradation in performance. A yellow alarm condition requires monitoring or maintenance.</p> <p><b>ignore</b>—Suppresses or ignores the alarm.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	



## link-mode

---

<b>Syntax</b>	<code>link-mode mode;</code>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">ether-options</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Set the device's link-connection characteristic.
<b>Default</b>	The <b>full-duplex</b> mode is enabled.
<b>Options</b>	<p><b>mode</b> —Link characteristic:</p> <ul style="list-style-type: none"><li>• <b>full-duplex</b>—Connection is full duplex.</li><li>• <b>half-duplex</b>—Connection is half duplex.</li><li>• <b>automatic</b>—Link mode is negotiated.</li></ul> <p>If <b>no-auto-negotiation</b> is specified in the <b>ether-options</b> option, you can select only <b>full-duplex</b> or <b>half-duplex</b>. If auto-negotiation is specified in the <b>ether-options</b> option, you can select any mode.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029</a></li><li>• Junos® OS Network Interfaces</li></ul>



## link-speed

---

<b>Syntax</b>	link-speed <i>speed</i> ;
<b>Hierarchy Level</b>	[edit interfaces aex <a href="#">aggregated-ether-options</a> ]
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For aggregated Ethernet interfaces only, set the required link speed.
<b>Options</b>	<p><b>speed</b>—For aggregated Ethernet links, you can specify the speed in bits per second either as a complete decimal number or as a decimal number followed by the abbreviation <b>k</b> (1000), <b>m</b> (1,000,000), or <b>g</b> (1,000,000,000).</p> <p>Aggregated Ethernet links on the QFX Series can have one of the following speed values:</p> <ul style="list-style-type: none"> <li>• <b>1g</b>—Links are 1 Gbps.</li> <li>• <b>10g</b>—Links are 10 Gbps.</li> </ul>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Link Aggregation on page 2033</a></li> </ul>



## liveness-detection

---

<b>Syntax</b>	<pre>liveness-detection {   detection-time {     threshold <i>milliseconds</i>;   }   minimum-interval <i>milliseconds</i>;   minimum-receive-interval <i>milliseconds</i>;   multiplier <i>number</i>;   no-adaptation;   transmit-interval {     minimum-interval <i>milliseconds</i>;     threshold <i>milliseconds</i>;   }   version (1   automatic); }</pre>
<b>Hierarchy Level</b>	[edit protocols <b>iccp</b> <b>peer</b> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	<p>Include the <b>liveness-detection</b> statement to enable Bidirectional Forwarding Detection (BFD). BFD enables rapid detection of communication failures between peers.</p> <p>The remaining statement are explained separately.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.

## local-ip-addr (ICCP)

---


<b>Syntax</b>	<pre>local-ip-addr <i>local-ip-address</i>;</pre>
<b>Hierarchy Level</b>	[edit protocols <b>iccp</b> ], [edit protocols <b>iccp</b> <b>peer</b> <i>peer-IP-address</i> ],
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Specify the local IP address of the interchassis link (ICL) interface that Interchassis Control Protocol (ICCP) uses to communicate to the peers hosting a multichassis link aggregation group (MC-LAG).
<b>Options</b>	<b>local-ip-address</b> —Default local IP address to be used by all peers.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.



## loopback (Aggregated Ethernet, Gigabit Ethernet, and 10-Gigabit Ethernet)


<b>Syntax</b>	(loopback   no-loopback);
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> <b>aggregated-ether-options</b> ], [edit interfaces <i>interface-name</i> <b>ether-options</b> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For aggregated Ethernet, Gigabit Ethernet, and 10-Gigabit Ethernet interfaces, enable or disable loopback mode.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Ethernet Loopback Capability on page 2031</a></li> </ul>

## management-ethernet (Alarm)

<b>Syntax</b>	management-ethernet { <b>link-down</b> (red   yellow   ignore); }
<b>Hierarchy Level</b>	[edit chassis <b>alarm</b> ], [edit chassis <b>interconnect-device</b> <i>name</i> <b>alarm</b> ], [edit chassis <b>node-group</b> <i>name</i> <b>alarm</b> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Configure alarms for a management Ethernet interface.
	<div style="display: flex; align-items: center;">  <div> <p><b>NOTE:</b> If you configure a yellow alarm on the Interconnect device, it will be handled as a red alarm.</p> </div> </div>
<b>Options</b>	The remaining statement is explained separately.—
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Understanding Alarms on page 5825</a></li> <li>• <a href="#">Interface Alarm Messages on page 5829</a></li> </ul>



## mc-ae

<b>Syntax</b>	<pre>mc-ae {     chassis-id chassis-id;     mc-ae-id mc-ae-id;     mode (active-active);     status-control (active   standby); }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces aggregated-ether-options</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Specify the multichassis aggregated Ethernet interface configuration.
<b>Options</b>	<p><b>chassis-id</b>—Specify the chassis ID for LACP to calculate the port number of the MC-LAG physical member links.</p> <p><b>mc-ae-id</b>—Specify the identification number of MC-LAG device. The two MC-LAG QFX3500 devices that manage a given MC-LAG must have the same <b>mc-lag-id</b>.</p> <p><b>mode (active   active)</b>—Specify that the MC-LAG is in active-active mode. In this mode, if a member interface of the MC-LAG goes down, traffic can still be forwarded to the QFX3500 devices hosting the MC-LAG using the interchassis link-protection link (ICL-PL). The links from the client-device connected to both of the QFX3500 devices will remain active. Only active-active mode is supported at this time.</p> <p><b>status-control (active   standby)</b>—Specify if a peer is in active or standby mode. In active mode, the peer is considered the primary device, and in standby mode it is considered the secondary device. If the ICL-PL goes down, the peer in standby mode will bring its member links to standby state. If the Interchassis Control Protocol (ICCP) connection goes down, the peer in standby mode will change the LACP system ID to the default value on its member links.</p>
	<div>  <p><b>NOTE:</b> You cannot have both peers hosting an MC-LAG be in active or standby mode. One peer must be in active mode, and the other peer must be in standby mode.</p> </div>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>



## mc-ae-id

---

<b>Syntax</b>	<code>mc-ae-id <i>mc-ae-id</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces aggregated-ether-options mc-ae</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Specify the multichassis aggregated Ethernet (MC-AE) identification number of the MC-AE that a given aggregated Ethernet interface belongs to. The two peers that host a given multichassis link aggregation group (MC-LAG) must have the same multichassis aggregated Ethernet ID.
<b>Options</b>	<b>Range:</b> 1 through 65535.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## member

---

<b>Syntax</b>	<code>member <i>interface-name</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces interface-range interface-range-name</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify the name of the member interface belonging to an interface range on the QFX Series switch.
<b>Options</b>	<i>interface-name</i> —Name of the interface.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029</a></li> <li>• <a href="#">Interfaces Overview on page 1911</a></li> <li>• Junos® OS Network Interfaces</li> </ul>



## member-range

---

<b>Syntax</b>	<code>member-range <i>starting-interface-name ending-interface-name</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <code>interface-range interface-range-name</code> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify the names of the first and last members of a sequence of interfaces belonging to an interface range.
<b>Options</b>	<i>starting interface-name ending interface-name</i> —Name of the first member and the name of the last member in the interface sequence.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding Interface Ranges on the QFX Series on page 1928</a></li><li>• <a href="#">Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029</a></li><li>• <a href="#">Interfaces Overview on page 1911</a></li><li>• Junos® OS Network Interfaces</li></ul>

## minimum-interval (Liveness Detection)

---

<b>Syntax</b>	<code>minimum-interval <i>milliseconds</i>;</code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">iccp peer liveness-detection</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Configure the minimum intervals at which the peer transmits liveness detection requests and then expects to receive a reply from a peer with which it has established a Bidirectional Forwarding Detection (BFD) session. This value represents the minimum interval at which the peer transmits liveness detection requests as well as the minimum interval that the peer expects to receive a reply from a peer with which it has established a BFD session. Optionally, instead of using this statement, you can specify the minimum transmit and receive intervals separately using the <b>transmit-interval</b> <b>minimal-interval</b> and <b>minimum-receive-interval</b> statements.
<b>Options</b>	<i>milliseconds</i> —Specify the minimum interval value for Bidirectional Forwarding Detection (BFD). <b>Range:</b> 1 through 255,000
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.



## minimum-receive-interval (Liveness Detection)

---

<b>Syntax</b>	minimum-receive-interval <i>milliseconds</i> ;
<b>Hierarchy Level</b>	[edit protocols <b>iccp</b> peer <b>liveness-detection</b> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Configure the minimum interval at which the peer must receive a reply from a peer with which it has established a Bidirectional Forwarding Detection (BFD) session.
<b>Options</b>	<i>milliseconds</i> —Specify the minimum interval value. <b>Range:</b> 1 through 255,000
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.

## minimum-links

---

<b>Syntax</b>	minimum-links <i>number</i> ;
<b>Hierarchy Level</b>	[edit interfaces aex <b>aggregated-ether-options</b> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For an aggregated Ethernet interface, set the minimum number of links that must be up for the bundle to be labeled up.
<b>Options</b>	<i>number</i> —Number of links. <b>Range:</b> 1 through 8 <b>Default:</b> 1
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Link Aggregation on page 2033</a></li> </ul>



## mode (QFX Series)

---

<b>Syntax</b>	mode active-active ;
<b>Hierarchy Level</b>	[edit <a href="#">interfaces aggregated-ether-options mc-ae</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Configure the multichassis link aggregation group (MC-LAG) to be in active-active mode. In active-active mode, all of the members of the MC-LAG will be active on both QFX3500 devices. Only active-active mode is supported at this time.
<b>Options</b>	<b>active-active</b> —Specify that all of the members of the MC-LAG will be active on both QFX3500 devices.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	



## mtu

<b>Syntax</b>	<code>mtu bytes;</code>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> ], [edit <a href="#">interfaces</a> <i>interface-range</i> <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify the maximum transmission unit (MTU) size for the media. Changing the media MTU size causes an interface to be deleted and added again. On a QFX3500 switch, either standalone or as part of the QFabric system, the maximum MTU value on an untagged packet transiting through an ingress Gigabit Ethernet interface must be no more than the currently configured MTU value plus four, whereas the maximum MTU value on a tagged packet transiting through an ingress Gigabit Ethernet interface must be no more than the currently configured MTU value plus eight. The maximum MTU value on an untagged or tagged packet transiting through an ingress 10-Gigabit Ethernet interface must be no more than the currently configured MTU value plus eight.
<b>Options</b>	<p><i>bytes</i> —MTU size.</p> <p><b>Range:</b> 64 through 9216 bytes</p> <p><b>Default:</b> 1514 bytes</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029</a></li> <li>• Junos® OS Network Interfaces</li> </ul>



## multi-chassis

---

<b>Syntax</b>	<pre>multi-chassis {     multi-chassis-protection <i>peer-ip-address</i> {         interface <i>interface-name</i>;     } }</pre>
<b>Hierarchy Level</b>	[edit]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	<p>Configure an interchassis link-protection link (ICL-PL) between the two peers. You can configure either an Aggregated Ethernet interface or a 10-Gigabit Ethernet interface to be an ICL-PL.</p> <p>The remaining statements are explained separately.</p>
<b>Options</b>	<b>interface <i>interface-name</i></b> —Specify the logical interface name of the peer.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	

## multi-chassis-protection

---

<b>Syntax</b>	<pre>multi-chassis-protection <i>peer-ip-address</i> {     interface <i>interface-name</i>; }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">multi-chassis</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	<p>Mutlichassis protection provides link protection between the two peers hosting a multichassis link aggregation group (MC-LAG). If the Interchassis Control Protocol (ICCP) connection is up and the interchassis link (ICL) comes up, the peer configured as standby brings up the multichass aggregated Ethernet (MC-AE) interfaces shared with the peer. Multichassis protection must be configured on one interface for each peer.</p> <p>The remaining statements are explained separately.</p>
<b>Options</b>	<b>interface <i>interface-name</i></b> —Specify the logical interface name of the peer.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.



## multiplier (Liveness Detection)

---

<b>Syntax</b>	<code>multiplier <i>number</i>;</code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">iccp peer liveness-detection</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Configure the number of liveness detection requests not received by the peer before Bidirectional Forwarding Detection (BFD) declares the peer is down.
<b>Options</b>	<b>number</b> —Maximum allowable number of liveness detection requests missed by the peer. <b>Range:</b> 1 through 255 <b>Default:</b> 3
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	

## no-adaptation (Liveness Detection)

---

<b>Syntax</b>	<code>no-adaptation;</code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">iccp peer liveness-detection</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Configure Bidirectional Forwarding Detection (BFD) sessions to not adapt to changing network conditions.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	



## no-gratuitous-arp-request

---

<b>Syntax</b>	no-gratuitous-arp-request;
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> ], [edit <a href="#">interfaces</a> <i>interface-range</i> <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the switch not to respond to gratuitous ARP requests. You can disable responses to gratuitous ARP requests on both Layer 2 Ethernet switching interfaces and routed VLAN interfaces (RVIs).
<b>Default</b>	Gratuitous ARP responses are enabled on all Ethernet switching interfaces and RVIs.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Routed VLAN Interfaces on page 1551</a></li></ul>



## node-device (Chassis)

**Syntax**    `node-device name {  
                   fibre-channel {  
                     port-range {  
                       port-range-low port-range-high;  
                     }  
                   }  
           pic pic-number {  
             fte {  
               port port-number;  
               port-range port-range-low port-range-high;  
             }  
             xe {  
               port port-number;  
               port-range port-range-low port-range-high;  
             }  
           }  
         }`

**Hierarchy Level**    [edit chassis [node-group](#)]

**Release Information**    Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description**    Configure properties specific to a Node device in a QFabric system.  
                   The remaining statements are explained separately.

**Required Privilege Level**    interface—To view this statement in the configuration.  
                                   interface-control—To add this statement to the configuration.

**Related Documentation**    • [Configuring Link Aggregation on page 2033](#)



## node-group (Chassis)

```
Syntax  node-group name {
        aggregated-devices {
            ethernet {
                device-count number;
            }
        }
        alarm {
            interface-type {
                link-down (ignore | red | yellow);
            }
        }
        container-devices {
            device-count number;
        }
        node-device name {
            fibre-channel {
                port-range {
                    port-range-low port-range-high;
                }
            }
        }
        pic pic-number {
            fte {
                port port-number;
                port-range port-range-low port-range-high;
            }
            xe {
                port port-number;
                port-range port-range-low port-range-high;
            }
        }
        routing-engine {
            on-disk-failure {
                disk-failure-action (halt | reboot);
            }
        }
    }
```

**Hierarchy Level** [edit chassis]

**Release Information** Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Configure properties specific to a Node group.

The remaining statements are explained separately.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring Link Aggregation on page 2033](#)



---

## on-disk-failure

---

<b>Syntax</b>	on-disk-failure { disk-failure-action (halt   reboot); }
<b>Hierarchy Level</b>	[edit chassis routing-engine], [edit chassis node-group <i>name</i> routing-engine], [edit chassis interconnect-device <i>name</i> routing-engine]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Halt or reboot the switch if it detects hard disk errors on the Routing Engine.
<b>Options</b>	The remaining statement is explained separately.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Configuring the Junos OS to Enable a Routing Engine to Reboot on Hard Disk Errors</li></ul>



## peer (ICCP)

---

**Syntax**    `peer ip-address {  
              authentication-key string;  
              backup-liveness-detection {  
                  backup-peer-ip ip-address;  
              }  
              liveness-detection {  
                  detection-time {  
                      threshold milliseconds;  
                  }  
              minimum-interval milliseconds;  
              minimum-receive-interval milliseconds;  
              multiplier number;  
              no-adaptation;  
              transmit-interval {  
                  minimum-interval milliseconds;  
                  threshold milliseconds;  
              }  
              version (1 | automatic);  
          }  
          local-ip-addr ipv4-address;  
          session-establishment-hold-time seconds;  
          }`

**Hierarchy Level**    [edit protocols [iccp](#)]

**Release Information**    Statement introduced in Junos OS Release 12.2 for the QFX Series.

**Description**    Configure the peers hosting a multichassis link aggregation group (MC-LAG). You must configure Interchassis Control Protocol (ICCP) for both peers hosting an MC-LAG.

The remaining statements are explained separately.

**Required Privilege Level**    routing—To view this statement in the configuration.  
                                  routing-control—To add this statement to the configuration.



## peer (Multichassis)

<b>Syntax</b>	<code>peer ip-address {     interface interface-name; }</code>
<b>Hierarchy Level</b>	[edit <a href="#">multi-chassis</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Configure the IP address of the peer that is part of the interchassis link-protection link (ICL-PL). If the Interchassis Control Connection Protocol (ICCP) is up and the interchassis link (ICL) comes up, the peer configured as standby will bring up the MC-AE interfaces shared with the active peer specified by the <b>peer</b> statement. You must specify the physical interface of the peer.
<b>Options</b>	<b>interface interface-name</b> —Specify the logical interface name of the peer.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## periodic

<b>Syntax</b>	<code>periodic (fast   slow);</code>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces aex aggregated-ether-options lacp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the interval for periodic transmission of LACP packets.
<b>Default</b>	<b>fast</b>
<b>Options</b>	<b>interval</b> —Interval at which to periodically transmit LACP packets: <ul style="list-style-type: none"> <li><b>fast</b>—Transmit packets every second. This is the default.</li> <li><b>slow</b>—Transmit packets every 30 seconds.</li> </ul>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><a href="#">Understanding Aggregated Ethernet Interfaces and LACP on page 1913</a></li> <li>Junos® OS Network Interfaces</li> </ul>



## pic

---

**Syntax**    `pic pic-number {  
              fibre-channel {  
                  port-range {  
                      port-range-low port-range-high;  
                  }  
              }  
              xe {  
                  (port port-number | port-range port-range-low port-range-high);  
              }  
              xle {  
                  (port port-number | port-range port-range-low port-range-high);  
              }`

**Hierarchy Level**    [edit **chassis fpc slot**]

**Release Information**    Statement introduced in Junos OS Release 11.1 for the QFX Series.  
Options **xe** and **xle** introduced in Junos OS 12.2X50-D20 for the QFX Series.

**Description**    (QFX3500 and QFX3600 standalone switches only) Enable the specified port on the Physical Interface Card (PIC) to perform in the specified operating mode.

**Options**    *pic-number*—Number of the PIC.

- On a QFX3500 standalone switch, specify **0** if the port type is **fibre-channel**, and **2** if the port type is **xle**.
- On a QFX3600 standalone switch, specify **0** if the port type is **xe**, and **1** if the port type is **xle**.

The remaining statements are explained separately.

**Required Privilege Level**    interface—To view this statement in the configuration.  
                                  interface-control—To add this statement to the configuration.

**Related Documentation**    • [Configuring the QSFP+ Port Type on QFX3500 Standalone Switches on page 2039](#)  
                                  • [Configuring the Port Type on QFX3600 Standalone Switches on page 2041](#)



## port-mode

<b>Syntax</b>	port-mode (access   tagged-access   trunk);
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">unit</a> <i>logical-unit-number</i> family <a href="#">ethernet-switching</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure whether an interface on the switch operates in access, tagged access, or trunk mode.
<b>Default</b>	All switch interfaces are in access mode.
<b>Options</b>	<p><b>access</b>—Have the interface operate in access mode. In this mode, the interface can be in a single VLAN only. Access interfaces typically connect to network devices such as PCs, printers, IP telephones, and IP cameras.</p> <p><b>tagged-access</b>—Have the interface operate in access mode. In this mode, the interface can be in multiple VLANs. Access interfaces typically connect to network devices such as PCs, printers, IP telephones, and IP cameras.</p> <p><b>trunk</b>—Have the interface operate in trunk mode. In this mode, the interface can be in multiple VLANs and can multiplex traffic between different VLANs. Trunk interfaces typically connect to other switches and to routers on the LAN.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Reflective Relay on page 1549</a></li> <li>• <a href="#">Example: Configuring Reflective Relay for Use with VEPA Technology on page 1462</a></li> </ul>



## reflective-relay

---

<b>Syntax</b>	reflective-relay;
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">unit</a> <i>logical-unit-number</i> <a href="#">family</a> ethernet-switching]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure a switch interface to return packets back to a device on the same interface that was used to deliver the packets.
<b>Default</b>	Switch interfaces are not configured for reflective relay.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Reflective Relay for Use with VEPA Technology on page 1462</a></li><li>• <a href="#">Configuring Reflective Relay on page 1549</a></li></ul>

## routing-engine

---

<b>Syntax</b>	<pre>routing-engine {   <a href="#">on-disk-failure</a> {     <a href="#">disk-failure-action</a> (halt   reboot);   } }</pre>
<b>Hierarchy Level</b>	[edit chassis] [edit chassis <a href="#">interconnect-device</a> <i>name</i> ], [edit chassis <a href="#">node-group</a> <i>name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure a Routing Engine to halt or reboot automatically when a hard disk error occurs. A hard disk error may cause a Routing Engine to enter a state in which it responds to local pings and interfaces remain up, but no other processes are responding. Rebooting or halting prevents this.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring the Junos OS to Enable a Routing Engine to Reboot on Hard Disk Errors</a></li><li>• <a href="#">Junos OS High Availability Configuration Guide</a></li></ul>



---

## session-establishment-hold-time

---

<b>Syntax</b>	session-establishment-hold-time <i>seconds</i> ;
<b>Hierarchy Level</b>	[edit protocols <a href="#">iccp peer</a> ], [edit protocols <a href="#">iccp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Specify the time during which an Interchassis Control Protocol (ICCP) connection must succeed between peers.
<b>Options</b>	<b>seconds</b> —Specify the amount of time allotted for a successful ICCP connection.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.



## speed

---

<b>Syntax</b>	<code>speed (auto-negotiation   <i>speed</i>);</code>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">ether-options</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the speed of the interface.
<b>Default</b>	Autonegotiation is automatically enabled for Gigabit Ethernet interfaces. Autonegotiation is not an option for 10-Gigabit Ethernet interfaces. No explicit action is taken after the autonegotiation is complete or if the negotiation fails. If the <b>autonegotiation</b> statement at the [edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">ether-options</a> ] hierarchy level is enabled, the <b>auto-negotiation</b> option is enabled by default.
<b>Options</b>	<ul style="list-style-type: none"><li>• <b>auto-negotiation</b>—Automatically negotiate the speed based on the speed of the other end of the link. Autonegotiation is automatically enabled for Gigabit Ethernet interfaces. Autonegotiation is not an option for 10-Gigabit Ethernet interfaces. No explicit action is taken after the autonegotiation is complete or if the negotiation fails.</li><li>• <b>speed</b>—Specify the interface speed. This value sets the speed that is used on the link. If the <b>auto-negotiation</b> statement is enabled on a Gigabit Ethernet interface, configure the value to advertise to the interface at the other end of the link. If you disable autonegotiation on a Gigabit Ethernet interface, you must explicitly configure the speed to 1g.</li></ul>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• auto-negotiation</li><li>• <a href="#">Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029</a></li><li>• Junos® OS Network Interfaces</li></ul>

## status-control

---


<b>Syntax</b>	<code>status-control (active   standby);</code>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <a href="#">aggregated-ether-options</a> <a href="#">mc-ae</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Specify whether a peer hosting a multichassis link aggregation group (MC-LAG) is primary or secondary. Primary is considered active, and secondary is considered standby.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.



## targeted-broadcast

<b>Syntax</b>	targeted-broadcast;
<b>Hierarchy Level</b>	[edit <b>interfaces</b> <i>interface-name</i> <b>unit</b> <i>logical-unit-number</i> family inet], [edit <b>interfaces</b> <i>interface-range</i> <i>interface-range-name</i> <b>unit</b> <i>logical-unit-number</i> family inet]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify whether the IP packets destined for a Layer 3 broadcast need to be forwarded to both an egress interface and the Routing Engine, or to an egress interface only. The packets are broadcast only if the egress interface is a LAN interface.
<b>Default</b>	When this statement is not included, broadcast packets are sent to the Routing Engine only.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Configuring IP Directed Broadcast on an EX Series Switch</li> <li>• Configuring IP Directed Broadcast (CLI Procedure)</li> <li>• Understanding IP Directed Broadcast for EX Series Switches</li> </ul>


## threshold (Detection Time)

<b>Syntax</b>	threshold <i>milliseconds</i> ;
<b>Hierarchy Level</b>	[edit protocols <b>iccp</b> <i>peer</i> <b>liveness-detection</b> <i>detection-time</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Specify the threshold for the adaptation of the detection time for a Bidirectional Forwarding Detection (BFD) session. When the detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.
	<div>  <p><b>NOTE:</b> The threshold time must be greater than or equal to the <b>minimum-interval</b> or the <b>minimum-receive-interval</b> values.</p> </div>
<b>Options</b>	<b>milliseconds</b> — Value for the detection time adaptation threshold. <b>Range:</b> 1 through 255,000
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.



## traceoptions (Individual Interfaces)

---

<b>Syntax</b>	<pre>traceoptions {     flag <i>flag</i>; }</pre>
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Define tracing operations for individual interfaces.</p> <p>To specify more than one tracing operation, include multiple <b>flag</b> statements.</p> <p>The <b>traceoptions</b> statement for interfaces does not support a trace file. The logging is done by the kernel, so the tracing information is placed in the system <b>syslog</b> file in the directory <b>/var/log</b>.</p> <div><p><b>NOTE:</b> The <b>traceoptions</b> statement is not supported on the QFX3000 QFabric system.</p></div>
<b>Default</b>	If you do not include this statement, no interface-specific tracing operations are performed.
<b>Options</b>	<p><b>flag</b>—Tracing operation to perform. To specify more than one tracing operation, include multiple <b>flag</b> statements. The following are the interface-specific tracing options.</p> <ul style="list-style-type: none"><li>• <b>all</b>—All interface tracing operations</li><li>• <b>event</b>—Interface events</li><li>• <b>ipc</b>—Interface interprocess communication (IPC) messages</li><li>• <b>media</b>—Interface media changes</li><li>• <b>q921</b>—ISDN Q.921 frames</li><li>• <b>q931</b>—ISDN Q.931 frames</li></ul>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Tracing Operations of an Individual Router or Switch Interface</li></ul>



## traceoptions (ICCP)

<b>Syntax</b>	<pre>traceoptions {     file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i> &lt;disable&gt;; }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">protocols iccp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Set Interchassis Control Protocol (ICCP) tracing options.
<b>Default</b>	Tracing operations are disabled.
<b>Options</b>	<p><b>disable</b>—(Optional) Disable the tracing operation. One use of this option is to disable a single operation when you have defined a broad group of tracing operations, such as <b>all</b>.</p> <p><b>file <i>name</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name in quotation marks. By default, the log file is stored in <b>/var/log/</b>.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file named <b><i>trace-file</i></b> reaches its maximum size, it is renamed <b><i>trace-file.0</i></b>, then <b><i>trace-file.1</i></b>, and so on, until the maximum number of trace files is reached. Then, the oldest trace file is overwritten.</p> <p>If you specify a maximum number of files, you must also specify a maximum file size with the <b>size</b> option.</p> <p><b>Range:</b> 2 through 1000 files</p> <p><b>Default:</b> 1 trace file only</p> <p><b>flag</b>—Tracing operation to perform. To specify more than one tracing operation, include multiple <b>flag</b> statements.</p> <p>The following are the tracing options:</p> <ul style="list-style-type: none"> <li>• <b>all</b>—All tracing operations</li> <li>• <b>config-internal</b>—Trace configuration internals.</li> <li>• <b>general</b>—Trace general events.</li> <li>• <b>normal</b>—All normal events.</li> </ul> <p><b>Default:</b> If you do not specify this option, only unusual or abnormal operations are traced.</p> <ul style="list-style-type: none"> <li>• <b>parse</b>—Trace configuration parsing.</li> <li>• <b>policy</b>—Trace policy operations and actions.</li> </ul>



- **route**—Trace routing table changes.
- **state**—Trace state transitions.
- **task**—Trace protocol task processing.
- **timer**—Trace protocol task timer processing.

**no-world-readable**—(Optional) Prevent any user from reading the log file.

**size size**—(Optional) Maximum size of each trace file, in kilobytes (KB) or megabytes (MB). When a trace file named **trace-file** reaches this size, it is renamed **trace-file.0**. When the **trace-file** again reaches its maximum size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

If you specify a maximum file size, you must also specify a maximum number of trace files with the **files** option.

**Syntax:** **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

**Range:** 10 KB through the maximum file size supported on your system

**Default:** 1 MB

**world-readable**—(Optional) Allow any user to read the log file.

<b>Required Privilege</b>	routing—To view this statement in the configuration.
<b>Level</b>	routing-control—To add this statement to the configuration.

---

## transmit-interval (Liveness Detection)

---

**Syntax**     transmit-interval {  
                  **minimum-interval** *milliseconds*;  
                  **threshold** *milliseconds*;  
                  }

**Hierarchy Level**     [edit protocols **iccp peer liveness-detection**]

**Release Information**     Statement introduced in Junos OS Release 12.2 for the QFX Series.

**Description**     Configure the Bidirectional Forwarding Detection (BFD) transmit interval. The negotiated transmit interval for a peer is the interval between the sending of BFD liveness detection requests to peers. The receive interval for a peer is the minimum interval between receiving packets sent from its peer; the receive interval is not negotiated between peers. To determine the transmit interval, each peer compares its configured minimum transmit interval with its peer's minimum receive interval. The larger of the two numbers is accepted as the transmit interval for that peer.

The remaining statements are explained separately.

<b>Required Privilege</b>	routing—To view this statement in the configuration.
<b>Level</b>	routing-control—To add this statement to the configuration.



---

## traps

---

<b>Syntax</b>	(traps   no-traps);
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> ], [edit interfaces <i>interface-name</i> <i>unit</i> <i>logical-unit-number</i> ], [edit interfaces <i>interface-range</i> <i>interface-range-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Enable or disable the sending of SNMP notifications when the state of the connection changes.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Enabling or Disabling SNMP Notifications on Physical Interfaces</li><li>• Enabling or Disabling SNMP Notifications on Logical Interfaces</li></ul>



## unit

<b>Syntax</b>	<pre> unit <i>logical-unit-number</i> {     family {         ethernet-switching {             filter input <i>filter-name</i>;             filter output <i>filter-name</i>;             native-vlan-id <i>vlan-id</i>;             port-mode <i>mode</i>;             vlan {                 members [ (all   <i>names</i>   <i>vlan-ids</i>) ];             }         }         fibre-channel {             port-mode (f-port   np-port);         }         inet {             address <i>address</i> {                 primary;             }             filter input <i>filter-name</i>;             filter output <i>filter-name</i>;             primary;             targeted-broadcast;         }     } </pre>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces interface-name</a> ], [edit <a href="#">interfaces interface-range interface-range-name</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure a logical interface on the physical device. You must configure a logical interface to be able to use the physical device.
<b>Default</b>	You must configure a logical interface to be able to use the physical device.
<b>Options</b>	<p><b><i>logical-unit-number</i></b>—Number of the logical unit.</p> <p><b>Range:</b> 0 through 16,384</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029</a></li> <li>• <a href="#">Configuring Link Aggregation on page 2033</a></li> <li>• Junos® OS Network Interfaces</li> </ul>



## uplink-failure-detection

---

<b>Syntax</b>	<pre>uplink-failure-detection {   group group-name {     link-to-monitor interface-name;     link-to-disable interface-name;   } }</pre>
<b>Hierarchy Level</b>	[edit protocols]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Configure uplink and downlink interfaces in a group to monitor uplink failures and to propagate uplink failure information to the downlink interfaces.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Overview of Uplink Failure Detection on page 1941</a></li> <li>• <a href="#">Configuring Interfaces for Uplink Failure Detection on page 2032</a></li> <li>• <a href="#">Example: Configuring Interfaces for Uplink Failure Detection on page 1945</a></li> </ul>

## version (Liveness Detection)

---

<b>Syntax</b>	version (1   automatic);
<b>Hierarchy Level</b>	[edit protocols <a href="#">iccp peer liveness-detection</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Configure the Bidirectional Forwarding Detection (BFD) protocol version to detect.
<b>Options</b>	<p>1—Use BFD protocol version 1.</p> <p><b>automatic</b>—Autodetect the BFD protocol version.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>



## vlan-id

---

<b>Syntax</b>	<code>vlan-id <i>vlan-id-number</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">unit</a> <i>logical-unit-number</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For 10-Gigabit Ethernet and aggregated Ethernet interfaces only, bind an 802.1Q VLAN tag ID to a logical interface.



**NOTE:** The VLAN tag ID cannot be configured on logical interface unit 0. The logical unit number must be 1 or higher.

<b>Options</b>	<i>vlan-id-number</i> —Valid VLAN identifier. <b>Range:</b> 1 through 4094
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">vlan-tagging on page 1655</a></li><li>• <a href="#">Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029</a></li><li>• <a href="#">Configuring a Layer 3 Logical Interface on page 2033</a></li><li>• Junos® OS Network Interfaces</li></ul>



## vlan-tagging

---

<b>Syntax</b>	<code>vlan-tagging;</code>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> ] [edit <a href="#">interfaces</a> <a href="#">interface-range</a> <i>interface-range-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Enable VLAN tagging. The platform receives and forwards single-tag frames with 802.1Q VLAN tags.
<b>Default</b>	VLAN tagging is disabled by default.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">vlan-id on page 2118</a></li><li>• <a href="#">Configuring a Layer 3 Logical Interface on page 2033</a></li></ul>




## xe (Port)

<b>Syntax</b>	<pre>xe {   (port <i>port-number</i>   port-range <i>port-range-low</i> <i>port-range-high</i>); }</pre>
<b>Hierarchy Level</b>	[edit <b>chassis</b> <b>fpc</b> <b>slot</b> <b>pic</b> <i>pic-number</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2X50-D20 for the QFX Series.
<b>Description</b>	(QFX3600 standalone switch only) Configure a specific port or a range of ports to operate as four 10-Gigabit Ethernet (xe) type ports.
	<div>  <p><b>CAUTION:</b> The Packet Forwarding Engine on the switch is restarted when you commit the port type configuration changes. As a result, you might experience packet loss on the switch.</p> </div>
	<div>  <p><b>NOTE:</b> Port Q0 supports only three (not the typical four) 10-Gigabit Ethernet ports. Therefore, you can configure up to 63 (not 64) 10-Gigabit Ethernet ports on ports Q0 through Q15.</p> </div>
<b>Options</b>	<p><b><i>port-number</i></b>—Port number on which you want to configure the port type. Valid values are 0 through 15.</p> <p><b><i>port-range-low</i></b>—Lowest-numbered port in the range of ports. The lowest possible value is 0.</p> <p><b><i>port-range-high</i></b>—Highest-numbered port in the range of ports. The highest possible value is 15.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the Port Type on QFX3600 Standalone Switches on page 2041</a></li> </ul>



## xle (Port)

---

Syntax	<pre>xle {   (port <i>port-number</i>   port-range <i>port-range-low</i> <i>port-range-high</i>); }</pre>
Hierarchy Level	[edit <b>chassis</b> <b>fpc</b> <i>slot</i> <b>pic</b> <i>pic-number</i> ]
Release Information	Statement introduced in Junos OS Release 12.2X50-D20 for the QFX Series.
Description	(QFX3500 and QFX3600 standalone switches only) Configure a specific QSFP+ port or a range of QSFP+ ports to operate as 40-Gigabit Ethernet ( <i>xle</i> ) type ports.
<div></div> <div>.....</div> <div><b>CAUTION:</b> The Packet Forwarding Engine on the switch is restarted when you commit the port type configuration changes. As a result, you might experience packet loss on the switch.</div> <div>.....</div>	
Options	<p><b><i>port-number</i></b>—Port number on which you want to configure the port type. On a QFX3500 standalone switch, specify a value from 0 through 3. On a QFX3600 standalone switch, specify a value from 0 through 15.</p> <p><b><i>port-range-low</i></b>—Lowest-numbered port in the range of ports. The lowest possible value is 0.</p> <p><b><i>port-range-high</i></b>—Highest-numbered port in the range of ports. The highest possible value is 3 on QFX3500 standalone switches, and 15 on QFX3600 standalone switches.</p>
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring the QSFP+ Port Type on QFX3500 Standalone Switches on page 2039</a></li><li>• <a href="#">Configuring the Port Type on QFX3600 Standalone Switches on page 2041</a></li></ul>



## CHAPTER 25

# Administration

- [Routine Monitoring on page 2121](#)
- [Monitoring Commands on page 2127](#)

## Routine Monitoring

---

- [Monitoring System Process Information on page 2121](#)
- [Monitoring System Properties on page 2122](#)
- [Monitoring Interface Status and Traffic on page 2123](#)
- [Verifying That Layer 3 Logical Interfaces Are Working on page 2124](#)
- [Verifying the Status of a LAG Interface on page 2124](#)
- [Verifying That LACP Is Configured Correctly and Bundle Members Are Exchanging LACP Protocol Packets on page 2125](#)
- [Verifying That Uplink Failure Detection Is Working Correctly on page 2126](#)

## Monitoring System Process Information

**Purpose** View the processes running on the QFX Series.

**Action** To view the software processes running on the QFX Series:  
[edit system]

user@switch> **show system processes**

**Meaning** [Table 32 on page 277](#) summarizes the output fields in the system process information display.

The display includes the total CPU load and total memory utilization.

**Table 159: Summary of System Process Information Output Fields**

Field	Values
PID	Identifier of the process.
Name	Owner of the process.



Table 159: Summary of System Process Information Output Fields (*continued*)

Field	Values
State	Current state of the process.
CPU Load	Percentage of the CPU that is being used by the process.
Memory Utilization	Amount of memory that is being used by the process.
Start Time	Time of day when the process started.

- Related Documentation**
- [Monitoring System Properties on page 278](#)
  - [show system uptime on page 1017](#)

## Monitoring System Properties

**Purpose** View system properties such as the name and IP address of a QFX Series product and resource usage.

**Action** To monitor system properties in the CLI, enter the following commands:

- [show system uptime](#)
- [show system users](#)
- [show system storage](#)

**Meaning** [Table 33 on page 278](#) summarizes key output fields in the system properties display.

Table 160: Summary of Key System Properties Output Fields

Field	Values	Additional Information
<b>General Information</b>		
Serial Number	Serial number for a QFX Series product.	
Junos OS Version	Version of Junos OS active on the switch, including whether the software is for domestic or export use.	Export software is for use outside the USA and Canada.
Hostname	Name of the QFX Series product.	
IP Address	IP address of the QFX Series product.	
Loopback Address	Loopback address.	
Domain Name Server	Address of the domain name server.	



Table 160: Summary of Key System Properties Output Fields (*continued*)

Field	Values	Additional Information
Time Zone	Time zone on the QFX Series product.	
Time		
Current Time	Current system time, in Coordinated Universal Time (UTC).	
System Booted Time	Date and time when the QFX Series product was last booted and how long it has been running.	
Protocol Started Time	Date and time when the protocols were last started and how long they have been running.	
Last Configured Time	Date and time when a configuration was last committed. This field also shows the name of the user who issued the last <b>commit</b> command.	
Load Average	CPU load average for 1, 5, and 15 minutes.	
Storage Media		
Internal Flash Memory	Usage details of internal flash memory.	
External Flash Memory	Usage details of external USB flash memory.	
Logged in Users Details		
User	Username of any user logged in to the switch.	
Terminal	Terminal through which the user is logged in.	
From	System from which the user has logged in. A hyphen indicates that the user is logged in through the console.	
Login Time	Time when the user logged in.	This is the <b>user@switch</b> field in <b>show system users</b> command output.
Idle Time	How long the user has been idle.	

- Related Documentation**
- [Monitoring System Process Information on page 277](#)
  - [show system processes on page 931](#)

## Monitoring Interface Status and Traffic

- Purpose** View interface status to monitor interface bandwidth utilization and traffic statistics on the QFX Series product.



- Action**
- To view interface status for all the interfaces, enter [show interfaces xe](#).
  - To view status and statistics for a specific interface, enter [show interfaces xe interface-name](#).
  - To view status and traffic statistics for all interfaces, enter either [show interfaces xe detail](#) or [show interfaces xe extensive](#).

**Meaning** For details about output from the CLI commands, see [show interfaces xe](#).

## Verifying That Layer 3 Logical Interfaces Are Working

**Purpose** After configuring Layer 3 logical interfaces, verify that they are set up properly and transmitting data.

- Action**
- To determine if you have successfully created the logical interfaces and the links are up:

```
[edit interfaces]
user@switch> show interfaces interface-name terse
Interface           Admin Link Proto  Local           Remote
ge-0/0/0            up    up
ge-0/0/0.0          up    up  inet   1.1.1.1/24
ge-0/0/0.1          up    up  inet   2.1.1.1/24
ge-0/0/0.2          up    up  inet   3.1.1.1/24
ge-0/0/0.3          up    up  inet   4.1.1.1/24
ge-0/0/0.4          up    up  inet   5.1.1.1/24
ge-0/0/0.32767      up    up
```

- Use the **ping** command from a device on one subnet to an address on another subnet to determine if packets were transmitted correctly on the logical interface VLANs:

```
user@switch> ping ip-address
PING 1.1.1.1 (1.1.1.1): 56 data bytes
64 bytes from 1.1.1.1: icmp_seq=0 ttl=64 time=0.157 ms
64 bytes from 1.1.1.1: icmp_seq=1 ttl=64 time=0.238 ms
64 bytes from 1.1.1.1: icmp_seq=2 ttl=64 time=0.255 ms
64 bytes from 1.1.1.1: icmp_seq=3 ttl=64 time=0.128 ms
--- 1.1.1.1 ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
```

**Meaning** The output confirms that the logical interfaces have been created and the links are up.

**Related Documentation**

- [Configuring a Layer 3 Logical Interface on page 2033](#)

## Verifying the Status of a LAG Interface

**Purpose** Verify that a link aggregation group (LAG) (**ae0**) has been created on the switch.

- Action** To verify that the **ae0** LAG has been created:

```
[edit interfaces]
show interfaces ae0 terse
```



Interface	Admin	Link	Proto	Local	Remote
ae0	up	up			
ae0.0	up	up	inet	10.10.10.2/24	

**Meaning** The output confirms that the **ae0** link is up and shows the family and IP address assigned to this link.

- Related Documentation**
- [Configuring Link Aggregation on page 2033](#)
  - [Verifying That LACP Is Configured Correctly and Bundle Members Are Exchanging LACP Protocol Packets on page 2125](#)
  - [Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch on page 1950](#)
  - [Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch on page 1954](#)
  - [show lacp statistics interfaces \(View\) on page 2307](#)

## Verifying That LACP Is Configured Correctly and Bundle Members Are Exchanging LACP Protocol Packets

Verify that LACP has been set up correctly and that the bundle members are transmitting LACP protocol packets.

1. [Verifying the LACP Setup on page 2125](#)
2. [Verifying That LACP Packets Are Being Exchanged on page 2126](#)

### Verifying the LACP Setup

**Purpose** Verify that the LACP has been set up correctly.

**Action** To verify that LACP has been enabled as active on one end:

```
user@switch>show lacp interfaces xe-0/0/0
Aggregated interface: ae0
LACP state:
xe-0/1/0      Actor No Yes  Dist No No No Yes Fast Active
xe-0/1/0      PartnerNo Yes  Dist No No No Yes Fast Passive
LACP protocol: Receive State Transmit State Mux State
xe-0/1/0      Defaulted Fast periodic Detached
```

**Meaning** This example shows that LACP has been configured with one side as active and the other as passive. When LACP is enabled, one side must be set as active in order for the bundled link to be up.



### Verifying That LACP Packets Are Being Exchanged

---

**Purpose** Verify that LACP packets are being exchanged between interfaces.

**Action** Use the **show lacp statistics interfaces *interface-name*** command to display LACP BPDU exchange information.

**show lacp statistics interfaces ae0**

Aggregated interface: ae0

LACP Statistics:	LACP Rx	LACP Tx	Unknown Rx	Illegal Rx
xe-0/0/2	1352	2035	0	0
xe-0/0/3	1352	2056	0	0

**Meaning** The output here shows that the link is up and that PDUs are being exchanged.

- Related Documentation**
- [Configuring Link Aggregation on page 2033](#)
  - [Verifying the Status of a LAG Interface on page 2124](#)
  - [Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch on page 1950](#)
  - [Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch on page 1954](#)
  - [show lacp statistics interfaces \(View\) on page 2307](#)

### Verifying That Uplink Failure Detection Is Working Correctly

**Purpose** Verify that the switch disables the downlink interface when it detects an uplink failure.



- Action** 1. View the current uplink failure detection status:

```
user@switch> show uplink-failure-detection
Group                : group1
Uplink               : xe-0/0/0*
Downlink             : xe-0/0/1*
Failure Action       : Inactive
```



**NOTE:** The asterisk (\*) indicates that the link is up.

2. Disable the uplink interface:

```
[edit]
user@switch# set interface xe-0/0/0 disable
```

3. Save the configuration on the switch.

4. View the current uplink failure detection status:

```
user@switch> show uplink-failure-detection
Group                : group1
Uplink               : xe-0/0/0
Downlink             : xe-0/0/1
Failure Action       : Active
```

**Meaning** The output in Step 1 shows that the uplink interface is up, and hence that the downlink interface is also up, and that the status of **Failure Action** is **Inactive**.

The output in Step 4 shows that both the uplink and downlink interfaces are down (there are no asterisks after the interface name) and that the status of **Failure Action** is changed to **Active**. This output shows that uplink failure detection is working.

- Related Documentation**
- [Overview of Uplink Failure Detection on page 1941](#)
  - [Configuring Interfaces for Uplink Failure Detection on page 2032](#)
  - [Example: Configuring Interfaces for Uplink Failure Detection on page 1945](#)

## Monitoring Commands



## monitor interface

**Syntax**    `monitor interface`  
               `<interface-name> | traffic <detail>>`

**Release Information**    Command introduced before Junos OS Release 7.4.  
                                   Command introduced in Junos OS Release 9.0 for EX Series switches.  
                                   Command introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Display real-time statistics about interfaces, updating the statistics every second. Check for and display common interface failures, such as SONET/SDH and T3 alarms, loopbacks detected, and increases in framing errors.



**NOTE:** This command is not supported on the QFX3000 QFabric system.

**Options**    **none**—Display real-time statistics for all interfaces.

**detail**—(Optional) With traffic option only, display detailed output.

**interface-name**—(Optional) Display real-time statistics for the specified interface. In a TX Matrix or TX Matrix Plus router, display real-time statistics for the physical interfaces on the specified line-card chassis (LCC) only.

**traffic**—(Optional) Display traffic data for all active interfaces. In a TX Matrix or TX Matrix Plus router, display real-time statistics for the physical interfaces on the specified LCC only.

**Additional Information**    The output of this command shows how much each field has changed since you started the command or since you cleared the counters by pressing the c key. For a description of the statistical information provided in the output of this command, see the **show interfaces extensive** command for a particular interface type in the Junos OS Operational Mode Commands. To control the output of the **monitor interface** command while it is running, use the keys listed in [Table 161 on page 2128](#). The keys are not case-sensitive.

**Table 161: Output Control Keys for the monitor interface Command**

Key	Action
c	Clears (returns to zero) the delta counters since <b>monitor interface</b> was started. This does not clear the accumulative counter. To clear the accumulative counter, use the <b>clear interfaces interval</b> command.
f	Freezes the display, halting the display of updated statistics and delta counters.
i	Displays information about a different interface. The command prompts you for the name of a specific interface.



**Table 161: Output Control Keys for the monitor interface Command** *(continued)*

Key	Action
n	Displays information about the next interface. The <b>monitor interface</b> command displays the physical or logical interfaces in the same order as the <b>show interfaces terse</b> command.
q or Esc	Quits the command and returns to the command prompt.
t	Thaws the display, resuming the update of the statistics and delta counters.

To control the output of the **monitor interface traffic** command while it is running, use the keys listed in [Table 162 on page 2129](#). The keys are not case-sensitive.

**Table 162: Output Control Keys for the monitor interface traffic Command**

Key	Action
b	Displays the statistics in units of bytes and bytes per second (Bps).
c	Clears (return to 0) the delta counters in the <b>Current Delta</b> column. The statistics counters are not cleared.
d	Displays the <b>Current Delta</b> column (instead of the rate column) in Bps or packets per second (pps).
p	Displays the statistics in units of packets and packets per second (pps).
q or Esc	Quits the command and returns to the command prompt.
r	Displays the rate column (instead of the <b>Current Delta</b> column) in Bps and pps.

**Required Privilege Level** trace

**List of Sample Output** [monitor interface \(Physical\) on page 2132](#)  
[monitor interface \(OTN Interface\) on page 2132](#)  
[monitor interface \(Logical\) on page 2133](#)  
[monitor interface \(QFX3500 Switch\) on page 2134](#)  
[monitor interface traffic on page 2134](#)  
[monitor interface traffic \(QFX3500 Switch\) on page 2135](#)  
[monitor interface traffic detail \(QFX3500 Switch\) on page 2135](#)

**Output Fields** [Table 163 on page 2130](#) describes the output fields for the **monitor interface** command. Output fields are listed in the approximate order in which they appear.



Table 163: monitor interface Output Fields

Field Name	Field Description	Level of Output
<b>routerl</b>	Hostname of the router.	All levels
<b>Seconds</b>	How long the monitor interface command has been running or how long since you last cleared the counters.	All levels
<b>Time</b>	Current time (UTC).	All levels
<b>Delay x/y/z</b>	Time difference between when the statistics were displayed and the actual clock time. <ul style="list-style-type: none"> <li>• <b>x</b>—Time taken for the last polling (in milliseconds).</li> <li>• <b>y</b>—Minimum time taken across all pollings (in milliseconds).</li> <li>• <b>z</b>—Maximum time taken across all pollings (in milliseconds).</li> </ul>	All levels
<b>Interface</b>	Short description of the interface, including its name, status, and encapsulation.	All levels
<b>Link</b>	State of the link: <b>Up</b> , <b>Down</b> , or <b>Test</b> .	All levels
<b>Current delta</b>	Cumulative number for the counter in question since the time shown in the Seconds field, which is the time since you started the command or last cleared the counters.	All levels
<b>Local Statistics</b>	(Logical interfaces only) Number and rate of bytes and packets destined to the router or switch through the specified interface. When a burst of traffic is received, the value in the output packet rate field might briefly exceed the peak cell rate. It usually takes less than 1 second for this counter to stabilize. <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul>	All levels
<b>Remote Statistics</b>	(Logical interfaces only) Statistics for traffic transiting the router or switch. When a burst of traffic is received, the value in the output packet rate field might briefly exceed the peak cell rate. It usually takes less than 1 second for this counter to stabilize. <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul>	All levels



Table 163: monitor interface Output Fields (*continued*)

Field Name	Field Description	Level of Output
Traffic statistics	<p>Total number of bytes and packets received and transmitted on the interface. These statistics are the sum of the local and remote statistics. When a burst of traffic is received, the value in the output packet rate field might briefly exceed the peak cell rate. It usually takes less than 1 second for this counter to stabilize.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul>	All levels
Description	With the <b>traffic</b> option, displays the interface description configured at the <b>[edit interfaces <i>interface-name</i>]</b> hierarchy level.	<b>detail</b>



## Sample Output

monitor interface  
(Physical)

```

user@host> monitor interface so-0/0/0
router1                               Seconds: 19                               Time: 15:46:29

Interface: so-0/0/0, Enabled, Link is Up
Encapsulation: PPP, Keepalives, Speed: 0C48
Traffic statistics:
Input packets:                        6045 (0 pps)                               [11]
Input bytes:                          6290065 (0 bps)                            [13882]
Output packets:                       10376 (0 pps)                               [10]
Output bytes:                         10365540 (0 bps)                          [9418]
Encapsulation statistics:
Input keepalives:                     1901                               [2]
Output keepalives:                   1901                               [2]
NCP state: Opened
LCP state: Opened
Error statistics:
Input errors:                         0                               [0]
Input drops:                         0                               [0]
Input framing errors:                 0                               [0]
Policed discards:                    0                               [0]
L3 incompletes:                      0                               [0]
L2 channel errors:                   0                               [0]
L2 mismatch timeouts:                0                               [0]
Carrier transitions:                  1                               [0]
Output errors:                       0                               [0]
Output drops:                        0                               [0]
Aged packets:                        0                               [0]
Active alarms : None
Active defects: None
SONET error counts/seconds:
LOS count                            1                               [0]
LOF count                            1                               [0]
SEF count                            1                               [0]
ES-S                                 0                               [0]
SES-S                                 0                               [0]
SONET statistics:
BIP-B1                               458871                          [0]
BIP-B2                               460072                          [0]
REI-L                                465610                          [0]
BIP-B3                               458978                          [0]
REI-P                                458773                          [0]
Received SONET overhead:
F1      : 0x00 J0      : 0x00 K1      : 0x00
K2      : 0x00 S1      : 0x00 C2      : 0x00
C2(cmp) : 0x00 F2      : 0x00 Z3      : 0x00
Z4      : 0x00 S1(cmp) : 0x00
Transmitted SONET overhead:
F1      : 0x00 J0      : 0x01 K1      : 0x00
K2      : 0x00 S1      : 0x00 C2      : 0xcf
F2      : 0x00 Z3      : 0x00 Z4      : 0x00

Next='n', Quit='q' or ESC, Freeze='f', Thaw='t', Clear='c', Interface='i'

```

monitor interface  
(OTN Interface)

```

user@host> monitor interface ge-7/0/0

Interface: ge-7/0/0, Enabled, Link is Up

```



```

Encapsulation: Ethernet, Speed: 10000mbps
Traffic statistics:
  Input bytes:                0 (0 bps)
  Output bytes:               0 (0 bps)
  Input packets:              0 (0 pps)
  Output packets:             0 (0 pps)
Error statistics:
  Input errors:               0
  Input drops:                0
  Input framing errors:       0
  Policed discards:           0
  L3 incompletes:             0
  L2 channel errors:          0
  L2 mismatch timeouts:       0
  Carrier transitions:        5
  Output errors:              0
  Output drops:               0
  Aged packets:               0
Active alarms : None
Active defects: None
Input MAC/Filter statistics:
  Unicast packets             0
  Broadcast packets           0
  Multicast packets           0
  Oversized frames            0
  Packet reject count         0
  DA rejects                  0
  SA rejects                   0
Output MAC/Filter Statistics:
  Unicast packets             0
  Broadcast packets           0
  Multicast packets           0
  Packet pad count            0
  Packet error count          0
OTN Link 0
  OTN Alarms: OTU_BDI, OTU_TTIM, ODU_BDI
  OTN Defects: OTU_BDI, OTU_TTIM, ODU_BDI, ODU_TTIM
  OTN OC - Seconds
    LOS                        2
    LOF                        9
  OTN OTU - FEC Statistics
    Corr err ratio             N/A
    Corr bytes                 0
    Uncorr words               0
  OTN OTU - Counters
    BIP                        0
    BBE                        0
    ES                         0
    SES                        0
    UAS                        422
  OTN ODU - Counters
    BIP                        0
    BBE                        0
    ES                         0
    SES                        0
    UAS                        422
  OTN ODU - Received Overhead  APSPCC 0-3: 0

```

monitor interface  
(Logical)

user@host> monitor interface so-1/0/0.0  
host name                      Seconds: 16

Time: 15:33:39  
Delay: 0/0/1



```

Interface: so-1/0/0.0, Enabled, Link is Down
Flags: Hardware-Down Point-To-Point SNMP-Traps
Encapsulation: PPP
Local statistics:
    Input bytes: 0
    Output bytes: 0
    Input packets: 0
    Output packets: 0
Remote statistics:
    Input bytes: 0 (0 bps)
    Output bytes: 0 (0 bps)
    Input packets: 0 (0 pps)
    Output packets: 0 (0 pps)
Traffic statistics:
    Destination address: 192.168.8.193, Local: 192.168.8.21

Next='n', Quit='q' or ESC, Freeze='f', Thaw='t', Clear='c', Interface='i'

```

### monitor interface (QFX3500 Switch)

```

user@switch> monitor interface ge-0/0/0
Interface: ge-0/0/0, Enabled, Link is Down
Encapsulation: Ethernet, Speed: Unspecified
Traffic statistics:
    Input bytes: 0 (0 bps)
    Output bytes: 0 (0 bps)
    Input packets: 0 (0 pps)
    Output packets: 0 (0 pps)
Error statistics:
    Input errors: 0
    Input drops: 0
    Input framing errors: 0
    Policed discards: 0
    L3 incompletes: 0
    L2 channel errors: 0
    L2 mismatch timeouts: 0
    Carrier transitions: 0
    Output errors: 0
    Output drops: 0
    Aged packets: 0
Active alarms : LINK
Active defects: LINK
Input MAC/Filter statistics:
    Unicast packets 0
    Broadcast packets 0 Multicast packet
Interface warnings:
    o Outstanding LINK alarm

```

### monitor interface traffic

```

user@host> monitor interface traffic
host name          Seconds: 15          Time: 12:31:09

Interface  Link  Input packets  (pps)  Output packets  (pps)
so-1/0/0   Down    0             (0)      0             (0)
so-1/1/0   Down    0             (0)      0             (0)
so-1/1/1   Down    0             (0)      0             (0)
so-1/1/2   Down    0             (0)      0             (0)
so-1/1/3   Down    0             (0)      0             (0)
t3-1/2/0   Down    0             (0)      0             (0)
t3-1/2/1   Down    0             (0)      0             (0)
t3-1/2/2   Down    0             (0)      0             (0)
t3-1/2/3   Down    0             (0)      0             (0)

```



so-2/0/0	Up	211035	(1)	36778	(0)
so-2/0/1	Up	192753	(1)	36782	(0)
so-2/0/2	Up	211020	(1)	36779	(0)
so-2/0/3	Up	211029	(1)	36776	(0)
so-2/1/0	Up	189378	(1)	36349	(0)
so-2/1/1	Down	0	(0)	18747	(0)
so-2/1/2	Down	0	(0)	16078	(0)
so-2/1/3	Up	0	(0)	80338	(0)
at-2/3/0	Up	0	(0)	0	(0)
at-2/3/1	Down	0	(0)	0	(0)

Bytes=b, Clear=c, Delta=d, Packets=p, Quit=q or ESC, Rate=r, Up=^U, Down=^D

#### monitor interface traffic (QFX3500 Switch)

```
user@switch> monitor interface traffic
switch                                     Seconds: 7                               Time: 16:04:37
```

Interface	Link	Input packets	(pps)	Output packets	(pps)
ge-0/0/0	Down	0	(0)	0	(0)
ge-0/0/1	Up	392187	(0)	392170	(0)
ge-0/0/2	Down	0	(0)	0	(0)
ge-0/0/3	Down	0	(0)	0	(0)
ge-0/0/4	Down	0	(0)	0	(0)
ge-0/0/5	Down	0	(0)	0	(0)
ge-0/0/6	Down	0	(0)	0	(0)
ge-0/0/7	Down	0	(0)	0	(0)
ge-0/0/8	Down	0	(0)	0	(0)
ge-0/0/9	Up	392184	(0)	392171	(0)
ge-0/0/10	Down	0	(0)	0	(0)
ge-0/0/11	Down	0	(0)	0	(0)
ge-0/0/12	Down	0	(0)	0	(0)
ge-0/0/13	Down	0	(0)	0	(0)
ge-0/0/14	Down	0	(0)	0	(0)
ge-0/0/15	Down	0	(0)	0	(0)
ge-0/0/16	Down	0	(0)	0	(0)
ge-0/0/17	Down	0	(0)	0	(0)
ge-0/0/18	Down	0	(0)	0	(0)
ge-0/0/19	Down	0	(0)	0	(0)
ge-0/0/20	Down	0	(0)	0	(0)
ge-0/0/21	Down	0	(0)	0	(0)
ge-0/0/22	Up	392172	(0)	392187	(0)
ge-0/0/23	Up	392185	(0)	392173	(0)
vcp-0	Down	0		0	
vcp-1	Down	0		0	
ae0	Down	0	(0)	0	(0)
bme0	Up	0		1568706	

#### monitor interface traffic detail (QFX3500 Switch)

```
user@switch> monitor interface traffic detail
switch                                     Seconds: 74                               Time: 16:03:02
```

Interface	Link	Input packets	(pps)	Output packets	(pps)
ge-0/0/0	Down	0	(0)	0	(0)
ge-0/0/1	Up	392183	(0)	392166	(0)
ge-0/0/2	Down	0	(0)	0	(0)
ge-0/0/3	Down	0	(0)	0	(0)
ge-0/0/4	Down	0	(0)	0	(0)
ge-0/0/5	Down	0	(0)	0	(0)
ge-0/0/6	Down	0	(0)	0	(0)
ge-0/0/7	Down	0	(0)	0	(0)



ge-0/0/8	Down	0	(0)	0	(0)
ge-0/0/9	Up	392181	(0)	392168	(0)
ge-0/0/10	Down	0	(0)	0	(0)
ge-0/0/11	Down	0	(0)	0	(0)
ge-0/0/12	Down	0	(0)	0	(0)
ge-0/0/13	Down	0	(0)	0	(0)
ge-0/0/14	Down	0	(0)	0	(0)
ge-0/0/15	Down	0	(0)	0	(0)
ge-0/0/16	Down	0	(0)	0	(0)
ge-0/0/17	Down	0	(0)	0	(0)
ge-0/0/18	Down	0	(0)	0	(0)
ge-0/0/19	Down	0	(0)	0	(0)
ge-0/0/20	Down	0	(0)	0	(0)
ge-0/0/21	Down	0	(0)	0	(0)
ge-0/0/22	Up	392169	(0)	392184	(1)
ge-0/0/23	Up	392182	(0)	392170	(0)
vcp-0	Down	0		0	
vcp-1	Down	0		0	
ae0	Down	0	(0)	0	(0)
bme0	Up	0		1568693	



## show iccp

**Syntax** `show iccp <brief | detail>`

**Release Information** Command introduced in Junos OS Release 12.2 for the QFX Series.

**Description** Display Interchassis Control Protocol (ICCP) information about the multichassis link aggregation group (MC-LAG) peers, including the state of the TCP connection, Bidirectional Forwarding Detection protocol, backup liveness peer status, and MCSNOOPD, LACPD, and ESWD applications.

**Options** none—Display ICCP information about the MC-LAG peers, including the state of the TCP connection and Bidirectional Forwarding Detection protocol, and MCSNOOPD, LACPD, and ESWD applications.

brief—Display brief ICCP information about the MC-LAG peers, including the state of the TCP connection and Bidirectional Forwarding Detection protocol, and MCSNOOPD, LACPD, and ESWD applications.

detail—Display detailed ICCP information about the MC-LAG peers, including the state of the TCP connection and Bidirectional Forwarding Detection protocol, and MCSNOOPD, LACPD, and ESWD applications.

**Required Privilege Level** view

**Related Documentation**

**List of Sample Output** [show iccp on page 2138](#)

**Output Fields** [Table 164 on page 2137](#) lists the output fields for the **show iccp** command. Output fields are listed in the approximate order in which they appear.

**Table 164: show iccp**

Field Name	Field Description
Redundancy Group Information for peer	Aggregated Ethernet interface name.
TCP Connection	Specifies if the TCP connection between the peers hosting the MC-LAG is up or down.
Liveness Detection	Specifies if liveness detection, also known as Bidirectional Forwarding Detection (BFD), is up or down.
Client Application	Specifies information regarding the state of the MCSNOOPD and ESWD client applications.



## Sample Output

`show iccp`

```
user@switch> show iccp
Redundancy Group Information for peer 3.3.3.2
  TCP Connection      : Established
  Liveliness Detection : Up

Client Application: MCSN00PD

Client Application: eswd
```



## show interfaces diagnostics optics

<b>Syntax</b>	<code>show interfaces diagnostics optics <i>interface-name</i></code>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Display diagnostics data and alarms for Gigabit Ethernet, 10-Gigabit Ethernet, and QSFP+ optical transceivers installed in a QFX Series product. The information provided by this command is known as digital optical monitoring (DOM) information.</p> <p>Thresholds that trigger a high alarm, low alarm, high warning, or low warning are set by the transponder vendors. Generally, a high alarm or low alarm indicates that the optics module is not operating properly. This information can be used to diagnose why a transceiver is not working.</p>
<b>Options</b>	<i>interface-name</i> —Name of the interface associated with the port in which the transceiver is installed.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Monitoring Interface Status and Traffic on page 279</a></li> <li>• Installing a Transceiver in a QFX Series Device</li> <li>• Removing a Transceiver from a QFX Series Device</li> <li>• Junos® OS Network Interfaces</li> </ul>
<b>List of Sample Output</b>	<a href="#">show interfaces diagnostics optics xe-0/0/1 (SFP+ Transceiver) on page 2143</a> <a href="#">show interfaces diagnostics optics node1:xe-0/0/1 (SFP+ Transceiver) on page 2144</a>
<b>Output Fields</b>	lists the output fields for the <code>show interfaces diagnostics optics</code> command. Output fields are listed in the approximate order in which they appear.

**Table 165: show interfaces diagnostics optics Output Fields**

Field Name	Field Description
Physical interface	Displays the name of the physical interface.
Laser bias current	Displays the magnitude of the laser bias power setting current, in milliamperes. The laser bias provides direct modulation of laser diodes and modulates currents.
Laser output power	Displays the laser output power, in milliwatts (mW) and decibels referred to 1.0 mW (dBm).
Module temperature	Displays the temperature, in Celsius and Fahrenheit.
Module voltage	Displays the voltage, in volts.
(Not available for XFP transceivers)	



Table 165: show interfaces diagnostics optics Output Fields (*continued*)

Field Name	Field Description
<b>Laser rx power</b> (Not available for SFP and SFP+ transceivers)	Displays the laser received optical power, in milliwatts (mW) and decibels referred to 1.0 mW (dBm).
<b>Receiver signal average optical power</b> (Not available for XFP transceivers)	Displays the receiver signal average optical power, in milliwatts (mW) and decibels referred to 1.0 mW (dBm).
<b>Laser bias current high alarm</b>	Displays whether the laser bias power setting high alarm is <b>On</b> or <b>Off</b> .
<b>Laser bias current low alarm</b>	Displays whether the laser bias power setting low alarm is <b>On</b> or <b>Off</b> .
<b>Laser bias current high warning</b>	Displays whether the laser bias power setting high warning is <b>On</b> or <b>Off</b> .
<b>Laser bias current low warning</b>	Displays whether the laser bias power setting low warning is <b>On</b> or <b>Off</b> .
<b>Laser output power high alarm</b>	Displays whether the laser output power high alarm is <b>On</b> or <b>Off</b> .
<b>Laser output power low alarm</b>	Displays whether the laser output power low alarm is <b>On</b> or <b>Off</b> .
<b>Laser output power high warning</b>	Displays whether the laser output power high warning is <b>On</b> or <b>Off</b> .
<b>Laser output power low warning</b>	Displays whether the laser output power low warning is <b>On</b> or <b>Off</b> .
<b>Module temperature high alarm</b>	Displays whether the module temperature high alarm is <b>On</b> or <b>Off</b> .
<b>Module temperature low alarm</b>	Displays whether the module temperature low alarm is <b>On</b> or <b>Off</b> .
<b>Module temperature high warning</b>	Displays whether the module temperature high warning is <b>On</b> or <b>Off</b> .
<b>Module temperature low warning</b>	Displays whether the module temperature low warning is <b>On</b> or <b>Off</b> .
<b>Module voltage high alarm</b> (Not available for XFP transceivers)	Displays whether the module voltage high alarm is <b>On</b> or <b>Off</b> .
<b>Module voltage low alarm</b> (Not available for XFP transceivers)	Displays whether the module voltage low alarm is <b>On</b> or <b>Off</b> .
<b>Module voltage high warning</b> (Not available for XFP transceivers)	Displays whether the module voltage high warning is <b>On</b> or <b>Off</b> .
<b>Module voltage low warning</b> (Not available for XFP transceivers)	Displays whether the module voltage low warning is <b>On</b> or <b>Off</b> .
<b>Laser rx power high alarm</b>	Displays whether the receive laser power high alarm is <b>On</b> or <b>Off</b> .



Table 165: show interfaces diagnostics optics Output Fields (*continued*)

Field Name	Field Description
Laser rx power low alarm	Displays whether the receive laser power low alarm is <b>On</b> or <b>Off</b> .
Laser rx power high warning	Displays whether the receive laser power high warning is <b>On</b> or <b>Off</b> .
Laser rx power low warning	Displays whether the receive laser power low warning is <b>On</b> or <b>Off</b> .
Laser bias current high alarm threshold	Displays the vendor-specified threshold for the laser bias current high alarm.
Module not ready alarm (Not available for SFP and SFP+ transceivers)	Displays whether the module not ready alarm is <b>On</b> or <b>Off</b> . When the output is <b>On</b> , the module has an operational fault.
Module power down alarm (Not available for SFP and SFP+ transceivers)	Displays whether the module power down alarm is <b>On</b> or <b>Off</b> . When the output is <b>On</b> , the module is in a limited power mode, low for normal operation.
Tx data not ready alarm (Not available for SFP and SFP+ transceivers)	Any condition leading to invalid data on the transmit path. Displays whether the Tx data not ready alarm is <b>On</b> or <b>Off</b> .
Tx not ready alarm (Not available for SFP and SFP+ transceivers)	Any condition leading to invalid data on the transmit path. Displays whether the Tx not ready alarm is <b>On</b> or <b>Off</b> .
Tx laser fault alarm (Not available for SFP and SFP+ transceivers)	Laser fault condition. Displays whether the Tx laser fault alarm is <b>On</b> or <b>Off</b> .
Tx CDR loss of lock alarm (Not available for SFP and SFP+ transceivers)	Transmit clock and data recovery (CDR) loss of lock. Loss of lock on the transmit side of the CDR. Displays whether the Tx CDR loss of lock alarm is <b>On</b> or <b>Off</b> .
Rx not ready alarm (Not available for SFP and SFP+ transceivers)	Any condition leading to invalid data on the receive path. Displays whether the Rx not ready alarm is <b>On</b> or <b>Off</b> .
Rx loss of signal alarm (Not available for SFP and SFP+ transceivers)	Receive loss of signal alarm. When <b>on</b> , indicates insufficient optical input power to the module. Displays whether the Rx loss of signal alarm is <b>On</b> or <b>Off</b> .
Rx CDR loss of lock alarm (Not available for SFP and SFP+ transceivers)	Receive CDR loss of lock. Loss of lock on the receive side of the CDR. Displays whether the Rx CDR loss of lock alarm is <b>On</b> or <b>Off</b> .
Laser bias current low alarm threshold	Displays the vendor-specified threshold for the laser bias current low alarm.
Laser bias current high warning threshold	Displays the vendor-specified threshold for the laser bias current high warning.



Table 165: show interfaces diagnostics optics Output Fields (*continued*)

Field Name	Field Description
Laser bias current low warning threshold	Displays the vendor-specified threshold for the laser bias current low warning.
Laser output power high alarm threshold	Displays the vendor-specified threshold for the laser output power high alarm.
Laser output power low alarm threshold	Displays the vendor-specified threshold for the laser output power low alarm.
Laser output power high warning threshold	Displays the vendor-specified threshold for the laser output power high warning.
Laser output power low warning threshold	Displays the vendor-specified threshold for the laser output power low warning.
Module temperature high alarm threshold	Displays the vendor-specified threshold for the module temperature high alarm.
Module temperature low alarm threshold	Displays the vendor-specified threshold for the module temperature low alarm.
Module temperature high warning threshold	Displays the vendor-specified threshold for the module temperature high warning.
Module temperature low warning threshold	Displays the vendor-specified threshold for the module temperature low warning.
Module voltage high alarm threshold (Not available for XFP transceivers)	Displays the vendor-specified threshold for the module voltage high alarm.
Module voltage low alarm threshold (Not available for XFP transceivers)	Displays the vendor-specified threshold for the module voltage low alarm.
Module voltage high warning threshold (Not available for XFP transceivers)	Displays the vendor-specified threshold for the module voltage high warning.
Module voltage low warning threshold (Not available for XFP transceivers)	Displays the vendor-specified threshold for the module voltage low warning.
Laser rx power high alarm threshold	Displays the vendor-specified threshold for the laser Rx power high alarm.
Laser rx power low alarm threshold	Displays the vendor-specified threshold for the laser Rx power low alarm.
Laser rx power high warning threshold	Displays the vendor-specified threshold for the laser Rx power high warning.



Table 165: show interfaces diagnostics optics Output Fields (*continued*)

Field Name	Field Description
Laser rx power low warning threshold	Displays the vendor-specified threshold for the laser Rx power low warning.

### Sample Output

show interfaces  
diagnostics optics

```
user@host> show interfaces diagnostics optics xe-0/0/1
Physical interface: xe-0/0/1
  Laser bias current           : 4.968 mA
```



xe-0/0/1  
(SFP+ Transceiver)

```

Laser output power           : 0.4940 mW / -3.06 dBm
Module temperature           : 27 degrees C / 81 degrees F
Module voltage                : 3.2310 V
Receiver signal average optical power : 0.0000
Laser bias current high alarm : Off
Laser bias current low alarm  : Off
Laser bias current high warning : Off
Laser bias current low warning : Off
Laser output power high alarm  : Off
Laser output power low alarm   : Off
Laser output power high warning : Off
Laser output power low warning : Off
Module temperature high alarm  : Off
Module temperature low alarm   : Off
Module temperature high warning : Off
Module temperature low warning : Off
Module voltage high alarm      : Off
Module voltage low alarm       : Off
Module voltage high warning    : Off
Module voltage low warning     : Off
Laser rx power high alarm      : Off
Laser rx power low alarm       : On
Laser rx power high warning    : Off
Laser rx power low warning     : On
Laser bias current high alarm threshold : 10.500 mA
Laser bias current low alarm threshold : 2.000 mA
Laser bias current high warning threshold : 9.000 mA
Laser bias current low warning threshold : 2.500 mA
Laser output power high alarm threshold : 1.4120 mW / 1.50 dBm
Laser output power low alarm threshold : 0.0740 mW / -11.31 dBm
Laser output power high warning threshold : 0.7070 mW / -1.51 dBm
Laser output power low warning threshold : 0.1860 mW / -7.30 dBm
Module temperature high alarm threshold : 75 degrees C / 167 degrees F
Module temperature low alarm threshold : -5 degrees C / 23 degrees F
Module temperature high warning threshold : 70 degrees C / 158 degrees F
Module temperature low warning threshold : 0 degrees C / 32 degrees F
Module voltage high alarm threshold : 3.630 V
Module voltage low alarm threshold : 2.970 V
Module voltage high warning threshold : 3.465 V
Module voltage low warning threshold : 3.135 V
Laser rx power high alarm threshold : 1.5849 mW / 2.00 dBm
Laser rx power low alarm threshold : 0.0407 mW / -13.90 dBm
Laser rx power high warning threshold : 0.7943 mW / -1.00 dBm
Laser rx power low warning threshold : 0.1023 mW / -9.90 dBm

```

show interfaces  
diagnostics optics

```

user@host> show interfaces diagnostics optics node1:xe-0/0/1
Physical interface: node1:xe-0/0/1
Laser bias current           : 4.968 mA

```



node1:xe-0/0/1  
(SFP+ Transceiver)

```

Laser output power           : 0.4940 mW / -3.06 dBm
Module temperature           : 27 degrees C / 81 degrees F
Module voltage                : 3.2310 V
Receiver signal average optical power : 0.0000
Laser bias current high alarm : Off
Laser bias current low alarm  : Off
Laser bias current high warning : Off
Laser bias current low warning : Off
Laser output power high alarm  : Off
Laser output power low alarm   : Off
Laser output power high warning : Off
Laser output power low warning : Off
Module temperature high alarm  : Off
Module temperature low alarm   : Off
Module temperature high warning : Off
Module temperature low warning : Off
Module voltage high alarm      : Off
Module voltage low alarm       : Off
Module voltage high warning    : Off
Module voltage low warning     : Off
Laser rx power high alarm      : Off
Laser rx power low alarm       : On
Laser rx power high warning    : Off
Laser rx power low warning     : On
Laser bias current high alarm threshold : 10.500 mA
Laser bias current low alarm threshold : 2.000 mA
Laser bias current high warning threshold : 9.000 mA
Laser bias current low warning threshold : 2.500 mA
Laser output power high alarm threshold : 1.4120 mW / 1.50 dBm
Laser output power low alarm threshold : 0.0740 mW / -11.31 dBm
Laser output power high warning threshold : 0.7070 mW / -1.51 dBm
Laser output power low warning threshold : 0.1860 mW / -7.30 dBm
Module temperature high alarm threshold : 75 degrees C / 167 degrees F
Module temperature low alarm threshold : -5 degrees C / 23 degrees F
Module temperature high warning threshold : 70 degrees C / 158 degrees F
Module temperature low warning threshold : 0 degrees C / 32 degrees F
Module voltage high alarm threshold : 3.630 V
Module voltage low alarm threshold : 2.970 V
Module voltage high warning threshold : 3.465 V
Module voltage low warning threshold : 3.135 V
Laser rx power high alarm threshold : 1.5849 mW / 2.00 dBm
Laser rx power low alarm threshold : 0.0407 mW / -13.90 dBm
Laser rx power high warning threshold : 0.7943 mW / -1.00 dBm
Laser rx power low warning threshold : 0.1023 mW / -9.90 dBm

```



## show interfaces fabric

---

<b>Syntax</b>	<code>show interfaces fabric</code> <code>&lt;interface-name&gt;</code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;descriptions&gt;</code> <code>&lt;media&gt;</code> <code>&lt;routing-instance (all   instance-name)&gt;</code> <code>&lt;snmp-index snmp-index&gt;</code> <code>&lt;statistics&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 12.3 for the QFX Series.
<b>Description</b>	Display status information about the specified fabric interface.
<b>Options</b>	<p><b>interface-name</b>—(QFabric systems only) Either the serial number or the alias of the QFabric switch component, such as a Node device, Interconnect device, or QFabric infrastructure. The name can contain a maximum of 128 characters and not contain any colons.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>routing-instance (all   instance-name)</b>—(Optional) Display all routing instances or the name of an individual routing instance.</p> <p><b>snmp-index snmp-index</b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Monitoring Interface Status and Traffic on page 279</a></li><li>• <a href="#">Troubleshooting Network Interfaces on page 1106</a></li><li>• <a href="#">Troubleshooting an Aggregated Ethernet Interface on page 1107</a></li><li>• Junos® OS Network Interfaces</li></ul>
<b>List of Sample Output</b>	<a href="#">show interfaces fabric on page 2154</a> <a href="#">show interfaces fabric brief on page 2154</a> <a href="#">show interfaces fabric detail on page 2162</a> <a href="#">show interfaces fabric extensive on page 2163</a> <a href="#">show interfaces fabric terse on page 2165</a> <a href="#">show interfaces fabric device-name on page 2165</a>



**Output Fields** Table 134 on page 1719 lists the output fields for the **show interfaces fabric** command. Output fields are listed in the approximate order in which they appear.

**Table 166: show interfaces fabric Output Fields**

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		
Physical interface	Name of the physical interface.	All levels
Enabled	State of the interface.	All levels
Type	Physical interface type; for example, Ethernet.	All levels
Interface index	Index number of the physical interface, which reflects its initialization sequence.	detail extensive none
SNMP ifIndex	SNMP index number for the physical interface.	detail extensive none
Link-level type	Encapsulation being used on the physical interface.	All levels
MTU	Maximum transmission unit size on the physical interface.	All levels
Clocking	Reference clock source.	detail
Speed	Speed at which the interface is running.	All levels
Duplex	Duplex mode of the interface, either Full-Duplex or Half-Duplex.	All levels
MAC-REWRITE Error	Specifies if the encapsulation of the packet has been changed.	none
BPDU Error	Specifies if a BPDU has been received on a blocked interface.	none
Loopback	Loopback status: Enabled or Disabled. If loopback is enabled, type of loopback: Local or Remote.	All levels
Source filtering	Source filtering status: Enabled or Disabled.	All levels
Flow control	Flow control status: Enabled or Disabled. This field is only displayed if asymmetric flow control is not configured.	All levels
Device flags	Information about the physical device.	All levels
Interface flags	Information about the interface.	All levels
CoS queues	Number of CoS queues configured.	detail extensive none
Hold-Times	Current interface hold-time up and hold-time down, in milliseconds.	detail
Current address	Configured MAC address.	detail extensive none



Table 166: show interfaces fabric Output Fields (*continued*)

Field Name	Field Description	Level of Output
Hardware address	Hardware MAC address.	detail extensive none
Last flapped	Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: year-month-day hour:minute:second:timezone (hour:minute:second ago)</b> . For example, <b>Last flapped: 2008-01-16 10:52:40 UTC (3d 22:58 ago)</b> .	detail extensive none
Statistics last cleared	Date, time, and how long ago the statistics for the interface were cleared. The format is <b>Statistics last cleared: year-month-day hour:minute:second:timezone (hour:minute:second ago)</b> . For example, <b>2010-05-17 07:51:28 PDT (00:04:33 ago)</b> .	detail extensive
Traffic statistics	<p>Number and rate of bytes and packets received and transmitted on the physical interface.</p> <ul style="list-style-type: none"> <li>• Input bytes—Number of bytes received on the interface.</li> <li>• Output bytes—Number of bytes transmitted on the interface.</li> <li>• Input packets—Number of packets received on the interface.</li> <li>• Output packets—Number of packets transmitted on the interface.</li> </ul> <p><b>NOTE:</b> The bandwidth bps counter is not enabled.</p>	detail extensive
IPv6 transit statistics	<p>If IPv6 statistics tracking is enabled, number of IPv6 bytes and packets received and transmitted on the logical interface:</p> <ul style="list-style-type: none"> <li>• Input bytes—Number of bytes received on the interface.</li> <li>• Output bytes—Number of bytes transmitted on the interface.</li> <li>• Input packets—Number of packets received on the interface.</li> <li>• Output packets—Number of packets transmitted on the interface.</li> </ul> <p><b>NOTE:</b> The bandwidth bps counter is not enabled.</p>	detail extensive



Table 166: show interfaces fabric Output Fields (*continued*)

Field Name	Field Description	Level of Output
Input errors	<p>Input errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• Errors—Sum of the incoming frame aborts and FCS errors.</li> <li>• Drops—Number of packets dropped by the input queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• Framing errors—Number of packets received with an invalid frame checksum (FCS).</li> <li>• Runts—Number of frames received that are smaller than the runt threshold.</li> <li>• Policed discards—Number of frames that the incoming packet match code discarded because they were not recognized or not of interest. Usually, this field reports protocols that Junos OS does not handle.</li> <li>• L3 incompletes—Number of incoming packets discarded because they failed Layer 3 sanity checks of the header. For example, a frame with less than 20 bytes of available IP header is discarded. L3 incomplete errors can be ignored if you configure the <code>ignore-l3-incompletes</code> statement.</li> <li>• L2 channel errors—Number of times the software did not find a valid logical interface for an incoming frame.</li> <li>• L2 mismatch timeouts—Number of malformed or short packets that caused the incoming packet handler to discard the frame as unreadable.</li> <li>• FIFO errors—Number of FIFO errors in the receive direction that are reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>• Resource errors—Sum of transmit drops.</li> </ul>	extensive



Table 166: show interfaces fabric Output Fields (*continued*)

Field Name	Field Description	Level of Output
Output errors	<p>Output errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>Carrier transitions—Number of times the interface has gone from down to up. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and then up, or another problem occurs. If the number of carrier transitions increments quickly (perhaps once every 10 seconds), the cable, the far-end system, or the PIC or PIM is malfunctioning.</li> <li>Errors—Sum of the outgoing frame aborts and FCS errors.</li> <li>Drops—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>Collisions—Number of Ethernet collisions. The Gigabit Ethernet PIC supports only full-duplex operation, so for Gigabit Ethernet PICs, this number should always remain 0. If it is nonzero, there is a software bug.</li> <li>Aged packets—Number of packets that remained in shared packet SDRAM so long that the system automatically purged them. The value in this field should never increment. If it does, it is most likely a software bug or possibly malfunctioning hardware.</li> <li>FIFO errors—Number of FIFO errors in the send direction as reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>HS link CRC errors—Number of errors on the high-speed links between the ASICs responsible for handling the fabric interfaces.</li> <li>MTU errors—Number of packets whose size exceeded the MTU of the interface.</li> <li>Resource errors—Sum of transmit drops.</li> </ul>	extensive
Egress queues	Total number of egress queues supported on the specified interface.	detail extensive
Queue counters	<p>CoS queue number and its associated user-configured forwarding class name.</p> <ul style="list-style-type: none"> <li>Queued packets—Number of queued packets.</li> <li>Transmitted packets—Number of transmitted packets.</li> <li>Dropped packets—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>	detail extensive
Input rate	Input rate in bits per second (bps) and packets per second (pps).	None specified
Output rate	Output rate in bps and pps.	None specified
Active alarms and Active defects	<p>Ethernet-specific defects that can prevent the interface from passing packets. When a defect persists for a certain amount of time, it is promoted to an alarm. Based on the switch configuration, an alarm can ring the red or yellow alarm bell on the switch, or turn on the red or yellow alarm LED on the craft interface. These fields can contain the value <b>None</b> or <b>Link</b>.</p> <ul style="list-style-type: none"> <li><b>None</b>—There are no active defects or alarms.</li> <li><b>Link</b>—Interface has lost its link state, which usually means that the cable is unplugged, the far-end system has been turned off, or the PIC is malfunctioning.</li> </ul>	detail extensive none



Table 166: show interfaces fabric Output Fields (*continued*)

Field Name	Field Description	Level of Output
MAC statistics	<p>Receive and Transmit statistics reported by the PIC's MAC subsystem.</p> <ul style="list-style-type: none"> <li>Total octets and total packets—Total number of octets and packets. For Gigabit Ethernet IQ PICs, the received octets count varies by interface type.</li> <li>Unicast packets, Broadcast packets, and Multicast packets—Number of unicast, broadcast, and multicast packets.</li> <li>CRC/Align errors—Total number of packets received that had a length (excluding framing bits, but including FCS octets) of between 64 and 1518 octets, inclusive, and had either a bad FCS with an integral number of octets (FCS Error) or a bad FCS with a nonintegral number of octets (Alignment Error).</li> <li>FIFO error—Number of FIFO errors that are reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>MAC control frames—Number of MAC control frames.</li> <li>MAC pause frames—Number of MAC control frames with pause operational code.</li> <li>Oversized frames—Number of packets that exceed the configured MTU.</li> <li>Jabber frames—Number of frames that were longer than 1518 octets (excluding framing bits, but including FCS octets), and had either an FCS error or an alignment error. This definition of jabber is different from the definition in IEEE-802.3 section 8.2.1.5 (10BASE5) and section 10.3.1.4 (10BASE2). These documents define jabber as the condition in which any packet exceeds 20 ms. The allowed range to detect jabber is from 20 ms to 150 ms.</li> <li>Fragment frames—Total number of packets that were less than 64 octets in length (excluding framing bits, but including FCS octets), and had either an FCS error or an alignment error. Fragment frames normally increment because both runts (which are normal occurrences caused by collisions) and noise hits are counted.</li> <li>VLAN tagged frames—Number of frames that are VLAN tagged. The system uses the TPID of 0x8100 in the frame to determine whether a frame is tagged or not. This counter is not supported on EX Series switches and is always displayed as 0.</li> <li>Code violations—Number of times an event caused the PHY to indicate "Data reception error" or "invalid data symbol error."</li> </ul>	extensive
Packet Forwarding Engine Configuration	<p>Information about the configuration of the Packet Forwarding Engine:</p> <ul style="list-style-type: none"> <li>Destination slot—FPC slot number.</li> <li>CoS transmit queue—Queue number and its associated user-configured forwarding class name.</li> <li>Bandwidth %—Percentage of bandwidth allocated to the queue.</li> <li>Buffer usec—Amount of buffer space allocated to the queue, in microseconds. This value is nonzero only if the buffer size is configured in terms of time.</li> <li>Priority—Queue priority: low or high.</li> <li>Limit—Displayed if rate limiting is configured for the queue. Possible values are none and exact. If exact is configured, the queue transmits only up to the configured bandwidth, even if excess bandwidth is available. If none is configured, the queue transmits beyond the configured bandwidth if bandwidth is available.</li> </ul>	extensive

---

**Logical Interface**


---



Table 166: show interfaces fabric Output Fields (*continued*)

Field Name	Field Description	Level of Output
Item	Type of QFabric system component being viewed. Possible values include Node group, Interconnect device, Fabric control, Fabric manager, Diagnostic routing engine, and Ungrouped Node device.	none
Identifier	Hardware serial identifier of a QFabric system component. When you configure an alias name for a component, the ID is displayed.	none
Connection	Status of a QFabric system component: either Connected or Disconnected, depending on whether or not the Director software has detected keepalive messages for the listed component.	none
Configuration	Whether or not the configuration for a QFabric system component has been received and installed. The configuration can be Configured, Failed (unsuccessful), Pending (in the process of being written or retried), or Unknown.	none
Node group	Name of the Node groups associated with the QFabric system, and the Node devices assigned to each Node group. The group can be either Connected or Disconnected, depending on whether or not the Director software has detected keepalive messages for the devices in the group. This field also displays the serial ID for the Node group and the status for the Node group.	none
Fabric control	Name of the virtual Junos Routing Engines responsible for route selection within a QFabric system partition. The fabric control Routing Engine can be either Connected or Disconnected, depending on whether or not the Director software has detected keepalive messages for this virtual device. It also displays the identifier and configuration status for the fabric control Routing Engine.	none
Logical interface	Name of the logical interface.	All levels
Index	Index number of the logical interface, which reflects its initialization sequence.	detail extensive none
SNMP ifIndex	SNMP interface index number for the logical interface.	detail extensive none
Flags	Information about the logical interface.  If unicast Reverse Path Forwarding (uRPF) is explicitly configured on the specified interface, the uRPF flag appears. If uRPF was configured on a different interface (and therefore is enabled on all switch interfaces) but was not explicitly configured on the specified interface, the uRPF flag does not appear even though uRPF is enabled.	All levels
Encapsulation	Encapsulation method used on the logical interface.	All levels



Table 166: show interfaces fabric Output Fields (*continued*)

Field Name	Field Description	Level of Output
Traffic statistics	<p>Number and rate of bytes and packets received and transmitted on the physical interface.</p> <ul style="list-style-type: none"> <li>• Input bytes—Number of bytes received on the interface.</li> <li>• Output bytes—Number of bytes transmitted on the interface.</li> <li>• Input packets—Number of packets received on the interface.</li> <li>• Output packets—Number of packets transmitted on the interface.</li> </ul> <p><b>NOTE:</b> The bandwidth bps counter is not enabled.</p>	detail extensive
Local statistics	<ul style="list-style-type: none"> <li>• Input bytes—Number of bytes received on the interface.</li> <li>• Output bytes—Number of bytes transmitted on the interface.</li> <li>• Input packets—Number of packets received on the interface.</li> <li>• Output packets—Number of packets transmitted on the interface.</li> </ul> <p><b>NOTE:</b> The bandwidth bps counter is not enabled.</p>	detail extensive
Transit statistics	<ul style="list-style-type: none"> <li>• Input bytes—Number of bytes received on the interface.</li> <li>• Output bytes—Number of bytes transmitted on the interface.</li> <li>• Input packets—Number of packets received on the interface.</li> <li>• Output packets—Number of packets transmitted on the interface.</li> </ul> <p><b>NOTE:</b> The bandwidth bps counter is not enabled.</p>	detail extensive
<i>protocol-family</i>	Protocol family configured on the logical interface. If the protocol is inet, the IP address of the interface is also displayed.	brief
Generation	Unique number for use by Juniper Networks technical support only.	detail extensive
Route table	Route table in which the logical interface address is located. For example, 0 refers to the routing table inet.0.	detail extensive none



## Sample Output

```
show interfaces fabric user@switch> show interfaces fabric
Item Identifier Connection Configuration
Node group
  BBAK3775 Connected Configured
  NW-NG-0 Connected Configured
  P2659-C Connected Configured
  ptor-0 Connected Configured
Fabric control
  FC-0 Connected Configured
  FC-1 Connected Configured
```

```
show interfaces fabric brief user@switch> show interfaces fabric brief
Physical interface: BBAK0372:fte-0/1/0, Enabled, Physical link is Up
  Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,
  Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled
  Device flags : Present Running
  Interface flags: SNMP-Traps Internal: 0x0

  Logical interface BBAK0372:fte-0/1/0.32768
    Flags: SNMP-Traps 0x0 Encapsulation: ENET2
    eth-switch

Physical interface: BBAK0372:fte-0/1/2, Enabled, Physical link is Up
  Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,
  Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled
  Device flags : Present Running
  Interface flags: SNMP-Traps Internal: 0x0

  Logical interface BBAK0372:fte-0/1/2.32768
    Flags: SNMP-Traps 0x0 Encapsulation: ENET2
    eth-switch

Physical interface: BBAK0394:fte-0/1/0, Enabled, Physical link is Up
  Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,
  Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled
  Device flags : Present Running
  Interface flags: SNMP-Traps Internal: 0x4000

  Logical interface BBAK0394:fte-0/1/0.32768
    Flags: SNMP-Traps Encapsulation: ENET2
    eth-switch

Physical interface: BBAK0394:fte-0/1/2, Enabled, Physical link is Up
  Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,
  Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled
  Device flags : Present Running
  Interface flags: SNMP-Traps Internal: 0x4000

  Logical interface BBAK0394:fte-0/1/2.32768
    Flags: SNMP-Traps Encapsulation: ENET2
    eth-switch

Physical interface: BBAK3775:bme0, Enabled, Physical link is Up
  Type: Ethernet, Link-level type: Ethernet, MTU: 1500, Clocking: Unspecified,
  Speed: Unspecified
  Device flags : Present Running
```



```

Logical interface BBAK3775:bme0.0
  Flags: LinkAddress 0-0 Encapsulation: ENET2
  inet 128.0.0.1/2
      128.0.0.16/2
      128.0.32.0/2
  tnp 0x10

Logical interface BBAK3775:bme0.1
  Flags: LinkAddress 0-0 Encapsulation: ENET2
  inet 128.0.0.13/2
      128.0.130.0/2

Logical interface BBAK3775:bme0.2
  Flags: Encapsulation: ENET2
  inet 128.0.0.13/8
      128.0.130.0/8
      169.254.128.13/16
      169.254.193.0/16

Physical interface: BBAK3775:qfabric, Enabled, Physical link is Up
  Type: Ethernet, Link-level type: Ethernet, MTU: 1572, Clocking: Unspecified,
  Speed: Unspecified
  Device flags : Present Running
  Interface flags: SNMP-Traps

Logical interface BBAK3775:qfabric.0
  Flags: SNMP-Traps Encapsulation: ENET2
  inet
  mpls
  eth-switch

Physical interface: BBAK3775:vcp0, Enabled, Physical link is Up
  Type: Ethernet, Link-level type: 70, MTU: 1514, Clocking: Unspecified, Speed:
  1000mbps
  Device flags : Present Running

Logical interface BBAK3775:vcp0.32769
  Flags: LinkAddress 0-0 Encapsulation: ENET2

Physical interface: BBAK3775:vcp1, Enabled, Physical link is Up
  Type: Ethernet, Link-level type: 70, MTU: 1496, Clocking: Unspecified, Speed:
  1000mbps
  Device flags : Present Running

Logical interface BBAK3775:vcp1.32768
  Flags: LinkAddress 0-0 Encapsulation: ENET2

Physical interface: BBAK3775:vcp2, Enabled, Physical link is Up
  Type: Ethernet, Link-level type: 70, MTU: 1496, Clocking: Unspecified, Speed:
  1000mbps
  Device flags : Present Running

Logical interface BBAK3775:vcp2.32768
  Flags: LinkAddress 0-0 Encapsulation: ENET2

Physical interface: BBAK3775:fte-0/1/0, Enabled, Physical link is Up
  Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,
  Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled
  Device flags : Present Running
  Interface flags: SNMP-Traps Internal: 0x0

```



Logical interface BBAK3775:fte-0/1/0.32768  
Flags: SNMP-Traps 0x0 Encapsulation: ENET2  
eth-switch

Physical interface: EE3093:fte-0/1/0, Enabled, Physical link is Up  
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,  
Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled  
Device flags : Present Running  
Interface flags: SNMP-Traps Internal: 0x0

Logical interface EE3093:fte-0/1/0.32768  
Flags: SNMP-Traps 0x0 Encapsulation: ENET2  
eth-switch

Physical interface: EE3093:fte-0/1/2, Enabled, Physical link is Up  
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,  
Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled  
Device flags : Present Running  
Interface flags: SNMP-Traps Internal: 0x0

Logical interface EE3093:fte-0/1/2.32768  
Flags: SNMP-Traps 0x0 Encapsulation: ENET2  
eth-switch

Physical interface: IC-WS001:fte-0/0/0, Enabled, Physical link is Up  
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,  
Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled  
Device flags : Present Running  
Interface flags: SNMP-Traps Internal: 0x0

Logical interface IC-WS001:fte-0/0/0.32768  
Flags: SNMP-Traps 0x0 Encapsulation: ENET2  
eth-switch

Physical interface: IC-WS001:fte-0/0/4, Enabled, Physical link is Up  
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,  
Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled  
Device flags : Present Running  
Interface flags: SNMP-Traps Internal: 0x0

Logical interface IC-WS001:fte-0/0/4.32768  
Flags: SNMP-Traps 0x0 Encapsulation: ENET2  
eth-switch

Physical interface: IC-WS001:fte-0/0/6, Enabled, Physical link is Up  
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,  
Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled  
Device flags : Present Running  
Interface flags: SNMP-Traps Internal: 0x0

Logical interface IC-WS001:fte-0/0/6.32768  
Flags: SNMP-Traps 0x0 Encapsulation: ENET2  
eth-switch

Physical interface: IC-WS001:fte-0/0/13, Enabled, Physical link is Up  
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,  
Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled  
Device flags : Present Running  
Interface flags: SNMP-Traps Internal: 0x0

Logical interface IC-WS001:fte-0/0/13.32768



```
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
eth-switch
```

```
Physical interface: IC-WS001:fte-0/0/15, Enabled, Physical link is Up
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,
Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled
Device flags   : Present Running
Interface flags: SNMP-Traps Internal: 0x0
```

```
Logical interface IC-WS001:fte-0/0/15.32768
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
eth-switch
```

```
Physical interface: IC-WS001:fte-1/0/2, Enabled, Physical link is Up
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,
Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled
Device flags   : Present Running
Interface flags: SNMP-Traps Internal: 0x0
```

```
Logical interface IC-WS001:fte-1/0/2.32768
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
eth-switch
```

```
Physical interface: IC-WS001:fte-1/0/7, Enabled, Physical link is Up
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,
Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled
Device flags   : Present Running
Interface flags: SNMP-Traps Internal: 0x0
```

```
Logical interface IC-WS001:fte-1/0/7.32768
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
eth-switch
```

```
Physical interface: IC-WS001:fte-1/0/10, Enabled, Physical link is Up
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,
Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled
Device flags   : Present Running
Interface flags: SNMP-Traps Internal: 0x0
```

```
Logical interface IC-WS001:fte-1/0/10.32768
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
eth-switch
```

```
Physical interface: IC-WS001:bme0, Enabled, Physical link is Up
Type: Ethernet, Link-level type: Ethernet, MTU: 1500, Clocking: Unspecified,
Speed: Unspecified
Device flags   : Present Running
```

```
Logical interface IC-WS001:bme0.0
Flags: LinkAddress 0-0 Encapsulation: ENET2
inet 128.0.32.0 --> 0/0
```

```
Logical interface IC-WS001:bme0.1
Flags: LinkAddress 0-0 Encapsulation: ENET2
inet 128.0.0.7/2
    128.0.130.2/2
```

```
Logical interface IC-WS001:bme0.2
Flags: Encapsulation: ENET2
inet 128.0.0.7/8
    128.0.130.2/8
```



169.254.128.7/16  
169.254.193.1/16

Physical interface: IC-WS001:bme1, Enabled, Physical link is Up  
Type: Ethernet, Link-level type: Ethernet, MTU: 1514, Clocking: Unspecified,  
Speed: 1000mbps  
Device flags : Present Running  
Interface flags: SNMP-Traps

Logical interface IC-WS001:bme1.0  
Flags: Encapsulation: ENET2  
inet 128.0.0.1/2  
128.0.0.4/2  
128.0.0.16/2  
128.0.0.17/2  
128.0.0.24/2  
128.0.0.25/2  
128.0.0.26/2  
128.0.0.28/2  
128.0.0.29/2  
128.0.0.31/2  
tnp 0x4

Physical interface: IC-WS001:qfabric, Enabled, Physical link is Up  
Type: Ethernet, Link-level type: Ethernet, MTU: 1572, Clocking: Unspecified,  
Speed: Unspecified  
Device flags : Present Running  
Interface flags: SNMP-Traps

Logical interface IC-WS001:qfabric.0  
Flags: SNMP-Traps Encapsulation: ENET2  
inet  
mpls  
eth-switch

Physical interface: IC-WS001:pme0, Enabled, Physical link is Up  
Type: Ethernet, Link-level type: Ethernet, MTU: 1510, Clocking: Unspecified,  
Speed: 1000mbps  
Device flags : Present Running  
Interface flags: SNMP-Traps

Physical interface: IC-WS001:pme1, Enabled, Physical link is Up  
Type: Ethernet, Link-level type: Ethernet, MTU: 1510, Clocking: Unspecified,  
Speed: 1000mbps  
Device flags : Present Running  
Interface flags: SNMP-Traps

Physical interface: IC-WS001:pme2, Enabled, Physical link is Down  
Type: Ethernet, Link-level type: Ethernet, MTU: 1510, Clocking: Unspecified,  
Speed: 1000mbps  
Device flags : Present Running  
Interface flags: SNMP-Traps

Physical interface: IC-WS001:pme3, Enabled, Physical link is Down  
Type: Ethernet, Link-level type: Ethernet, MTU: 1510, Clocking: Unspecified,  
Speed: 1000mbps  
Device flags : Present Running  
Interface flags: SNMP-Traps

Physical interface: IC-WS001:vcp0, Enabled, Physical link is Up  
Type: Ethernet, Link-level type: 70, MTU: 1514, Clocking: Unspecified, Speed:



```

1000mbps
Device flags      : Present Running

Logical interface IC-WS001:vcp0.32769
Flags: LinkAddress 0-0 Encapsulation: ENET2

Physical interface: IC-WS001:vcp1, Enabled, Physical link is Up
Type: Ethernet, Link-level type: 70, MTU: 1492, Clocking: Unspecified, Speed:
1000mbps
Device flags      : Present Running

Logical interface IC-WS001:vcp1.32768
Flags: LinkAddress 0-0 Encapsulation: ENET2

Physical interface: IC-WS001:vcp2, Enabled, Physical link is Up
Type: Ethernet, Link-level type: 70, MTU: 1492, Clocking: Unspecified, Speed:
1000mbps
Device flags      : Present Running

Logical interface IC-WS001:vcp2.32768
Flags: LinkAddress 0-0 Encapsulation: ENET2

Physical interface: IC-WS001:vcp3, Enabled, Physical link is Down
Type: Ethernet, Link-level type: 70, MTU: 1492, Clocking: Unspecified, Speed:
1000mbps
Device flags      : Present Running

Logical interface IC-WS001:vcp3.32768
Flags: Device-Down LinkAddress 0-0 Encapsulation: ENET2

Physical interface: IC-WS001:vcp4, Enabled, Physical link is Down
Type: Ethernet, Link-level type: 70, MTU: 1492, Clocking: Unspecified, Speed:
1000mbps
Device flags      : Present Running

Logical interface IC-WS001:vcp4.32768
Flags: Device-Down LinkAddress 0-0 Encapsulation: ENET2

Physical interface: NW-NG-0:bme0, Enabled, Physical link is Up
Type: Ethernet, Link-level type: Ethernet, MTU: 1500, Clocking: Unspecified,
Speed: Unspecified
Device flags      : Present Running

Logical interface NW-NG-0:bme0.0
Flags: LinkAddress 0-0 Encapsulation: ENET2
inet  128.0.0.1/2
      128.0.0.5/2
      128.0.32.0/2
tnp    0x5

Logical interface NW-NG-0:bme0.1
Flags: LinkAddress 0-0 Encapsulation: ENET2
inet  128.0.0.9/2
      128.0.128.4/2

Logical interface NW-NG-0:bme0.2
Flags: Encapsulation: ENET2
inet  128.0.0.9/8
      128.0.128.68/8
      169.254.128.9/16
      169.254.192.34/16

```



```
Physical interface: NW-NG-0:qfabric, Enabled, Physical link is Up
  Type: Ethernet, Link-level type: Ethernet, MTU: 1572, Clocking: Unspecified,
Speed: Unspecified
  Device flags   : Present Running
  Interface flags: SNMP-Traps

Logical interface NW-NG-0:qfabric.0
  Flags: SNMP-Traps Encapsulation: ENET2
  inet
  mpls
  eth-switch

Physical interface: NW-NG-0:vcp0, Enabled, Physical link is Up
  Type: Ethernet, Link-level type: 70, MTU: 1514, Clocking: Unspecified, Speed:
1000mbps
  Device flags   : Present Running

Logical interface NW-NG-0:vcp0.32769
  Flags: LinkAddress 0-0 Encapsulation: ENET2

Physical interface: NW-NG-0:vcp1, Enabled, Physical link is Up
  Type: Ethernet, Link-level type: 70, MTU: 1496, Clocking: Unspecified, Speed:
1000mbps
  Device flags   : Present Running

Logical interface NW-NG-0:vcp1.32768
  Flags: LinkAddress 0-0 Encapsulation: ENET2

Physical interface: P2659-C:bme0, Enabled, Physical link is Up
  Type: Ethernet, Link-level type: Ethernet, MTU: 1500, Clocking: Unspecified,
Speed: Unspecified
  Device flags   : Present Running

Logical interface P2659-C:bme0.0
  Flags: LinkAddress 0-0 Encapsulation: ENET2
  inet 128.0.0.1/2
      128.0.0.16/2
      128.0.32.0/2
  tnp 0x10

Logical interface P2659-C:bme0.1
  Flags: LinkAddress 0-0 Encapsulation: ENET2
  inet 128.0.0.8/2
      128.0.130.4/2

Logical interface P2659-C:bme0.2
  Flags: Encapsulation: ENET2
  inet 128.0.0.8/8
      128.0.130.4/8
      169.254.128.8/16
      169.254.193.2/16

Physical interface: P2659-C:qfabric, Enabled, Physical link is Up
  Type: Ethernet, Link-level type: Ethernet, MTU: 1572, Clocking: Unspecified,
Speed: Unspecified
  Device flags   : Present Running
  Interface flags: SNMP-Traps

Logical interface P2659-C:qfabric.0
  Flags: SNMP-Traps Encapsulation: ENET2
```



```

inet
mpls
eth-switch

```

```

Physical interface: P2659-C:vcp0, Enabled, Physical link is Up
Type: Ethernet, Link-level type: 70, MTU: 1514, Clocking: Unspecified, Speed:
1000mbps
Device flags    : Present Running

```

```

Logical interface P2659-C:vcp0.32769
Flags: LinkAddress 0-0 Encapsulation: ENET2

```

```

Physical interface: P2659-C:vcp1, Enabled, Physical link is Up
Type: Ethernet, Link-level type: 70, MTU: 1496, Clocking: Unspecified, Speed:
1000mbps
Device flags    : Present Running

```

```

Logical interface P2659-C:vcp1.32768
Flags: LinkAddress 0-0 Encapsulation: ENET2

```

```

Physical interface: P2659-C:vcp2, Enabled, Physical link is Up
Type: Ethernet, Link-level type: 70, MTU: 1496, Clocking: Unspecified, Speed:
1000mbps
Device flags    : Present Running

```

```

Logical interface P2659-C:vcp2.32768
Flags: LinkAddress 0-0 Encapsulation: ENET2

```

```

Physical interface: P2659-C:fte-0/1/2, Enabled, Physical link is Up
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,
Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled
Device flags    : Present Running
Interface flags: SNMP-Traps Internal: 0x0

```

```

Logical interface P2659-C:fte-0/1/2.32768
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
eth-switch

```

```

Physical interface: ptor-0:bme0, Enabled, Physical link is Up
Type: Ethernet, Link-level type: Ethernet, MTU: 1500, Clocking: Unspecified,
Speed: Unspecified
Device flags    : Present Running

```

```

Logical interface ptor-0:bme0.0
Flags: LinkAddress 0-0 Encapsulation: ENET2
inet  128.0.0.1/2
      128.0.0.17/2
      128.0.32.0/2
tnp   0x11

```

```

Logical interface ptor-0:bme0.1
Flags: LinkAddress 0-0 Encapsulation: ENET2
inet  128.0.0.16/2
      128.0.130.18/2

```

```

Logical interface ptor-0:bme0.2
Flags: Encapsulation: ENET2
inet  128.0.0.16/8
      128.0.130.18/8
      169.254.128.16/16
      169.254.193.9/16

```



```

Physical interface: ptor-0:qfabric, Enabled, Physical link is Up
  Type: Ethernet, Link-level type: Ethernet, MTU: 1572, Clocking: Unspecified,
  Speed: Unspecified
  Device flags   : Present Running
  Interface flags: SNMP-Traps

Logical interface ptor-0:qfabric.0
  Flags: SNMP-Traps Encapsulation: ENET2
  inet
  mpls
  eth-switch

Physical interface: ptor-0:vcp0, Enabled, Physical link is Up
  Type: Ethernet, Link-level type: 70, MTU: 1514, Clocking: Unspecified, Speed:
  1000mbps
  Device flags   : Present Running

Logical interface ptor-0:vcp0.32769
  Flags: LinkAddress 0-0 Encapsulation: ENET2

Physical interface: ptor-0:vcp1, Enabled, Physical link is Up
  Type: Ethernet, Link-level type: 70, MTU: 1496, Clocking: Unspecified, Speed:
  1000mbps
  Device flags   : Present Running

Logical interface ptor-0:vcp1.32768
  Flags: LinkAddress 0-0 Encapsulation: ENET2

Physical interface: ptor-0:vcp2, Enabled, Physical link is Up
  Type: Ethernet, Link-level type: 70, MTU: 1496, Clocking: Unspecified, Speed:
  1000mbps
  Device flags   : Present Running

Logical interface ptor-0:vcp2.32768
  Flags: LinkAddress 0-0 Encapsulation: ENET2

```

#### show interfaces fabric detail

```

user@switch> show interfaces fabric detail
Physical interface: BBAK0372:fte-0/1/0, Enabled, Physical link is Up
  Interface index: 49165, SNMP ifIndex: 1212678666, Generation: 140
  Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled, Flow control: Disabled
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x0
  CoS queues     : 12 supported, 12 maximum usable queues
  Hold-times     : Up 0 ms, Down 0 ms
  Current address: 84:18:88:d1:fa:1f, Hardware address: 84:18:88:d1:fa:1f
  Last flapped   : 2012-11-09 21:36:41 UTC (4d 00:23 ago)
  Statistics last cleared: Never
  Traffic statistics:
    Input bytes   :          14256654          0 bps
    Output bytes  :          9618986          0 bps
    Input packets :          90511          0 pps
    Output packets:          60101          0 pps
  IPv6 transit statistics:
    Input bytes   :          0
    Output bytes  :          0
    Input packets :          0
    Output packets:          0
  Egress queues: 12 supported, 5 in use

```



Queue counters:	Queued packets	Transmitted packets	Dropped packets
0 best-effort	0	0	0
3 fcoe	0	0	0
4 no-loss	0	0	0
7 network-cont	0	0	0
8 mcast	0	0	0

Active alarms : None

Active defects : None

Logical interface BBAK0372:fte-0/1/0.32768 (Index 71) (SNMP ifIndex 1212678667)  
(Generation 136)

Flags: SNMP-Traps 0x0 Encapsulation: ENET2

Traffic statistics:

Input bytes : 12450372

Output bytes : 11986557

Input packets: 90510

Output packets: 62750

Local statistics:

Input bytes : 12450372

Output bytes : 11986557

Input packets: 90510

Output packets: 62750

Transit statistics:

Input bytes : 0 0 bps

Output bytes : 0 0 bps

Input packets: 0 0 pps

Output packets: 0 0 pps

Protocol eth-switch, MTU: 0, Generation: 163, Route table: 0

#### show interfaces fabric extensive

user@switch> show interfaces fabric extensive

Physical interface: IC-WS001:fte-0/0/6, Enabled, Physical link is Up

Interface index: 49176, SNMP ifIndex: 1209008655, Generation: 155

Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex, BPDU  
Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:  
Disabled,

Flow control: Disabled

Device flags : Present Running

Interface flags: SNMP-Traps Internal: 0x0

CoS queues : 12 supported, 12 maximum usable queues

Hold-times : Up 0 ms, Down 0 ms

Current address: 00:00:00:00:00:06, Hardware address: 00:00:00:00:00:06

Last flapped : 2012-11-13 23:53:30 UTC (00:53:20 ago)

Statistics last cleared: Never

Traffic statistics:

Input bytes : 91179 0 bps

Output bytes : 361268221791 952985992 bps

Input packets: 590 0 pps

Output packets: 2580487185 850880 pps

IPv6 transit statistics:

Input bytes : 0

Output bytes : 0

Input packets: 0

Output packets: 0

Input errors:



```

Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0, L3
incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0, FIFO errors: 0,
Resource errors: 0
Output errors:
Carrier transitions: 1, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,
FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Egress queues: 12 supported, 5 in use
Queue counters:      Queued packets  Transmitted packets      Dropped packets

0 fabric_fcset      0              0              0
1 fabric_fcset      0              0              0
2 fabric_fcset      0              0              0
3 fabric_fcset      0              0              0
4 fabric_fcset      0              0              0
5 fabric_fcset      0              0              0
6 fabric_fcset      0              0              0
7 fabric_fcset      0              0              0
8 fabric_fcset      0          2582632925          0
9 fabric_fcset      0              0              0
10 fabric_fcset     0              0
0
11 fabric_fcset     0              0
0
Active alarms : None
Active defects : None
MAC statistics:
Total octets          Receive      Transmit
Total packets        590          361268221791
Unicast packets      590          2580487185
Broadcast packets    0            0
Multicast packets    0            0
CRC/Align errors     0            0
FIFO errors          0            0
MAC control frames   0            0
MAC pause frames     0            0
Oversized frames     0
Jabber frames        0
Fragment frames      0
VLAN tagged frames   0
Code violations       0
MAC Priority Flow Control Statistics:
Priority : 0          0            0
Priority : 1          0            0
Priority : 2          0            0
Priority : 3          0            0
Priority : 4          0            0
Priority : 5          0            0
Priority : 6          0            0
Priority : 7          0            0
Packet Forwarding Engine configuration:
Destination slot: 0

```



Direction : Output					
CoS transmit queue		Bandwidth		Buffer Priority	
Limit					
	%	bps	%	usec	
0 best-effort	5	2000000000	5	0	low
none					
3 fcoe	35	14000000000	35	0	low
none					
4 no-loss	35	14000000000	35	0	low
none					
7 network-control	5	2000000000	5	0	low
none					
8 mcast	20	8000000000	20	0	low
none					

Logical interface IC-WS001:fte-0/0/6.32768 (Index 85) (SNMP ifIndex 1209008656)  
(Generation 150)

Flags: SNMP-Traps 0x0 Encapsulation: ENET2

Traffic statistics:

Input bytes : 79496  
Output bytes : 179860  
Input packets: 590  
Output packets: 948

Local statistics:

Input bytes : 79496  
Output bytes : 179860  
Input packets: 590  
Output packets: 948

Transit statistics:

Input bytes : 0 0 bps  
Output bytes : 0 0 bps  
Input packets: 0 0 pps  
Output packets: 0 0 pps

Protocol eth-switch, MTU: 0, Generation: 178, Route table: 0

#### show interfaces fabric terse

user@switch> show interfaces fabric terse

Item	Identifier	Connection	Configuration
Node group			
BBAK3775		Connected	Configured
NW-NG-0		Connected	Configured
P2659-C		Connected	Configured
ptor-0		Connected	Configured
Fabric control			
FC-0		Connected	Configured
FC-1		Connected	Configured

#### show interfaces fabric device-name

user@switch> show interfaces fabric IC-WS001:fte-0/0/13

Physical interface: IC-WS001:fte-0/0/13, Enabled, Physical link is Up

Interface index: 49177, SNMP ifIndex: 1209008767

Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex, BPDU  
Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:  
Disabled,

Flow control: Disabled

Device flags : Present Running

Interface flags: SNMP-Traps Internal: 0x0

CoS queues : 12 supported, 12 maximum usable queues

Current address: 00:00:00:00:00:0d, Hardware address: 00:00:00:00:00:0d

Last flapped : 2012-11-13 23:55:15 UTC (00:55:38 ago)

Input rate : 0 bps (0 pps)

Output rate : 0 bps (0 pps)



Active alarms : None  
Active defects : None

Logical interface IC-WS001:fte-0/0/13.32768 (Index 86) (SNMP ifIndex 1209008768)

Flags: SNMP-Traps 0x0 Encapsulation: ENET2  
Input packets : 748  
Output packets: 954  
Protocol eth-switch, MTU: 0



## show interfaces ge

<b>Syntax</b>	<pre>show interfaces <i>device-name:type-fpc/pic/port</i> &lt;brief   detail   extensive   terse&gt; &lt;descriptions&gt; &lt;media&gt; &lt;routing-instance (all   <i>instance-name</i>)&gt; &lt;snmp-index <i>snmp-index</i>&gt; &lt;statistics&gt;</pre>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display status information about the specified Gigabit Ethernet interface. This command does not display statistics for routed VLAN interfaces.
<b>Options</b>	<p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b><i>device-name:type-fpc/pic/port</i></b>—The device name is either the serial number or the alias of the QFabric system component, such as a Node device, Interconnect device, or QFabric infrastructure. The name can contain a maximum of 128 characters and cannot contain any colons.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>routing instance (all   <i>instance-name</i>)</b>—(Optional) Display the name of an individual routing-instance or display all routing-instances.</p> <p><b>snmp-index <i>snmp-index</i></b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Monitoring Interface Status and Traffic on page 279</a></li> <li>• <a href="#">Troubleshooting Network Interfaces on page 1106</a></li> <li>• <a href="#">Troubleshooting an Aggregated Ethernet Interface on page 1107</a></li> <li>• Junos® OS Network Interfaces</li> </ul>
<b>List of Sample Output</b>	<p><a href="#">show interfaces on page 2175</a></p> <p><a href="#">show interfaces brief on page 2175</a></p> <p><a href="#">show interfaces detail (Symmetric Flow Control and Autonegotiation Enabled) on page 2175</a></p> <p><a href="#">show interfaces detail (Asymmetric Flow Control and Autonegotiation Enabled) on page 2176</a></p>



[show interfaces extensive \(Symmetric Flow Control and Autonegotiation Enabled\) on page 2178](#)

[show interfaces extensive \(Asymmetric Flow Control and Autonegotiation Enabled\) on page 2180](#)

[show interfaces terse on page 2182](#)

[show interfaces terse \(QFabric Systems\) on page 2182](#)

**Output Fields** Table 167 on page 2168 lists the output fields for the **show interfaces ge** command. Output fields are listed in the approximate order in which they appear.

**Table 167: show interfaces ge Output Fields**

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		
<b>Physical interface</b>	Name of the physical interface.	All levels
<b>Enabled</b>	State of the interface: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>Interface index</b>	Index number of the physical interface, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	SNMP index number for the physical interface.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Description</b>	Optional user-specified description.	<b>brief detail extensive</b>
<b>Link-level type</b>	Encapsulation being used on the physical interface.	All levels
<b>MTU</b>	Maximum transmission unit size on the physical interface. The default is 1514.	All levels
<b>Speed</b>	Speed at which the interface is running.	All levels
<b>Loopback</b>	Loopback status: <b>Enabled</b> or <b>Disabled</b> . If loopback is enabled, type of loopback: <b>Local</b> or <b>Remote</b> .	All levels
<b>Source filtering</b>	Source filtering status: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>Flow control</b>	Flow control status: <b>Enabled</b> or <b>Disabled</b> .  <b>NOTE:</b> This field is only displayed if asymmetric flow control is not configured.	<b>detail extensive</b>
<b>Configured-flow-control</b>	Configured flow control for the interface transmit buffers ( <b>tx-buffers</b> ) and receive buffers ( <b>rx-buffers</b> ):  <ul style="list-style-type: none"> <li><b>tx-buffers</b>—<b>On</b> if the interface is configured to respond to Ethernet PAUSE messages received from the connected peer. <b>Off</b> if the interface is not configured to respond to received PAUSE messages.</li> <li><b>rx-buffers</b>—<b>On</b> if the interface is configured to generate and send Ethernet PAUSE messages to the connected peer. <b>Off</b> if the interface is not configured to generate and send PAUSE messages.</li> </ul> <b>NOTE:</b> This field is only displayed if asymmetric flow control is configured.	<b>detail extensive</b>



Table 167: show interfaces ge Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Auto-negotiation</b>	Autonegotiation status: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>Remote-fault</b>	Remote fault status: <ul style="list-style-type: none"> <li>• <b>Online</b>—Autonegotiation is manually configured as online.</li> <li>• <b>Offline</b>—Autonegotiation is manually configured as offline.</li> </ul>	All levels
<b>Device flags</b>	Information about the physical device.	All levels
<b>Interface flags</b>	Information about the interface.	All levels
<b>Link flags</b>	Information about the link.	All levels
<b>CoS queues</b>	Number of CoS queues configured.	<b>detail extensive none</b>
<b>Hold-times</b>	Current interface hold-time up and hold-time down, in milliseconds.	<b>detail extensive</b>
<b>Current address</b>	Configured MAC address.	<b>detail extensive none</b>
<b>Hardware address</b>	MAC address of the hardware.	<b>detail extensive none</b>
<b>Last flapped</b>	Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: year-month-day hour:minute:second timezone (hour:minute:second ago)</b> . For example, <b>Last flapped: 2008-01-16 10:52:40 UTC (3d 22:58 ago)</b> .	<b>detail extensive none</b>
<b>Statistics last cleared</b>	Time when the statistics for the interface were last set to zero.	<b>detail extensive</b>
<b>Traffic statistics</b>	Number and rate of bytes and packets received and transmitted on the physical interface. <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul> <p><b>NOTE:</b> The bandwidth bps counter is not enabled on the switch.</p>	<b>detail extensive</b>



Table 167: show interfaces ge Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Input errors</b>	<p>Input errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Errors</b>—Sum of the incoming frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the input queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Framing errors</b>—Number of packets received with an invalid frame checksum (FCS).</li> <li>• <b>Runts</b>—Number of frames received that are smaller than the runt threshold.</li> <li>• <b>Policed discards</b>—Number of frames that the incoming packet match code discarded because they were not recognized or not of interest. Usually, this field reports protocols that Junos OS does not handle.</li> <li>• <b>L3 incompletes</b>—Number of incoming packets discarded because they failed Layer 3 sanity checks of the headers. For example, a frame with less than 20 bytes of available IP header is discarded.</li> <li>• <b>L2 channel errors</b>—Number of times the software did not find a valid logical interface for an incoming frame.</li> <li>• <b>L2 mismatch timeouts</b>—Number of malformed or short packets that caused the incoming packet handler to discard the frame as unreadable.</li> <li>• <b>FIFO errors</b>—Number of FIFO errors in the receive direction that are reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>



Table 167: show interfaces ge Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Output errors</b>	<p>Output errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Carrier transitions</b>—Number of times the interface has gone from <b>down</b> to <b>up</b>. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and then up, or another problem occurs. If the number of carrier transitions increments quickly (perhaps once every 10 seconds), the cable, the far-end system, or the PIC or PIM is malfunctioning.</li> <li>• <b>Errors</b>—Sum of the outgoing frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Collisions</b>—Number of Ethernet collisions. The Gigabit Ethernet PIC supports only full-duplex operation, so for Gigabit Ethernet PICs, this number should always remain 0. If it is nonzero, there is a software bug.</li> <li>• <b>Aged packets</b>—Number of packets that remained in shared packet SDRAM so long that the system automatically purged them. The value in this field should never increment. If it does, it is most likely a software bug or possibly malfunctioning hardware.</li> <li>• <b>FIFO errors</b>—Number of FIFO errors in the send direction as reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>• <b>HS link CRC errors</b>—Number of errors on the high-speed links between the ASICs responsible for handling the switch interfaces.</li> <li>• <b>MTU errors</b>—Number of packets whose size exceeded the MTU of the interface.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>
<b>Egress queues</b>	Total number of egress queues supported on the specified interface.	<b>detail extensive</b>
<b>Queue counters (Egress )</b>	<p>CoS queue number and its associated user-configured forwarding class name.</p> <ul style="list-style-type: none"> <li>• <b>Queued packets</b>—Number of queued packets.</li> <li>• <b>Transmitted packets</b>—Number of transmitted packets.</li> <li>• <b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>	<b>detail extensive</b>
<b>Queue Number</b>	The CoS queue number and the forwarding classes mapped to the queue number. The <b>Mapped forwarding class</b> column lists the forwarding classes mapped to each CoS queue.	<b>detail extensive</b>
<b>Active alarms and Active defects</b>	<p>Ethernet-specific defects that can prevent the interface from passing packets. When a defect persists for a certain amount of time, it is promoted to an alarm. Based on the switch configuration, an alarm can ring the red or yellow alarm bell on the switch or turn on the red or yellow alarm LED on the front of the switch. These fields can contain the value <b>None</b> or <b>Link</b>.</p> <ul style="list-style-type: none"> <li>• <b>None</b>—There are no active defects or alarms.</li> <li>• <b>Link</b>—Interface has lost its link state, which usually means that the cable is unplugged, the far-end system has been turned off, or the PIC is malfunctioning.</li> </ul>	<b>detail extensive none</b>



Table 167: show interfaces ge Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>MAC statistics</b>	<p>Receive and Transmit statistics reported by the PIC's MAC subsystem.</p> <ul style="list-style-type: none"> <li>• <b>Total octets</b> and <b>total packets</b>—Total number of octets and packets. For Gigabit Ethernet IQ PICs, the received octets count varies by interface type.</li> <li>• <b>Unicast packets, Broadcast packets, and Multicast packets</b>—Number of unicast, broadcast, and multicast packets.</li> <li>• <b>CRC/Align errors</b>—Total number of packets received that had a length (excluding framing bits, but including FCS octets) of between 64 and 1518 octets, inclusive, and had either a bad FCS with an integral number of octets (FCS Error) or a bad FCS with a nonintegral number of octets (Alignment Error).</li> <li>• <b>FIFO error</b>—Number of FIFO errors that are reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>• <b>MAC control frames</b>—Number of MAC control frames.</li> <li>• <b>MAC pause frames</b>—Number of MAC control frames with <b>pause</b> operational code.</li> <li>• <b>Oversized frames</b>—Number of packets that exceeds the configured MTU.</li> <li>• <b>Jabber frames</b>—Number of frames that were longer than 1518 octets (excluding framing bits, but including FCS octets), and had either an FCS error or an alignment error. This definition of jabber is different from the definition in IEEE-802.3 section 8.2.1.5 (10BASE5) and section 10.3.1.4 (10BASE2). These documents define jabber as the condition in which any packet exceeds 20 ms. The allowed range to detect jabber is from 20 ms to 150 ms.</li> <li>• <b>Fragment frames</b>—Total number of packets that were less than 64 octets in length (excluding framing bits, but including FCS octets), and had either an FCS error or an alignment error. Fragment frames normally increment because both runts (which are normal occurrences caused by collisions) and noise hits are counted.</li> <li>• <b>VLAN tagged frames</b>—Number of frames that are VLAN tagged. The system uses the TPID of 0x8100 in the frame to determine whether a frame is tagged or not. This counter is not supported on EX Series switches and is always displayed as 0.</li> <li>• <b>Code violations</b>—Number of times an event caused the PHY to indicate "Data reception error" or "invalid data symbol error."</li> </ul>	<b>extensive</b>
<b>Filter Statistics</b>	Receive and Transmit statistics reported by the PIC's MAC address filter subsystem.	<b>extensive</b>



Table 167: show interfaces ge Output Fields (*continued*)

Field Name	Field Description	Level of Output
Autonegotiation information	<p>Information about link autonegotiation:</p> <ul style="list-style-type: none"> <li>• <b>Negotiation status:</b> <ul style="list-style-type: none"> <li>• <b>Incomplete</b>—Ethernet interface has the speed or link mode configured.</li> <li>• <b>No autonegotiation</b>—Remote Ethernet interface has the speed or link mode configured or does not perform autonegotiation.</li> <li>• <b>Complete</b>—Ethernet interface is connected to a device that performs autonegotiation and the autonegotiation process is successful.</li> </ul> </li> <li>• <b>Link partner status</b>—OK when the Ethernet interface is connected to a device that performs autonegotiation and the autonegotiation process is successful.</li> <li>• <b>Link partner:</b> <ul style="list-style-type: none"> <li>• <b>Link mode</b>—Depending on the capability of the attached Ethernet device, either <b>Full-duplex</b> or <b>Half-duplex</b>.</li> <li>• <b>Flow control</b>—Types of flow control supported by the remote Ethernet device. For Gigabit Ethernet interfaces, types are <b>Symmetric</b> (link partner supports PAUSE on receive and transmit), <b>Asymmetric</b> (link partner supports PAUSE on transmit), and <b>Symmetric/Asymmetric</b> (link partner supports PAUSE on both receive and transmit or PAUSE only on receive).</li> <li>• <b>Remote fault</b>—Remote fault information from the link partner—<b>Failure</b> indicates a receive link error. <b>OK</b> indicates that the link partner is receiving. <b>Negotiation error</b> indicates a negotiation error. <b>Offline</b> indicates that the link partner is going offline.</li> <li>• <b>Link partner speed</b>—Speed of the link partner.</li> </ul> </li> <li>• <b>Local resolution:</b> <ul style="list-style-type: none"> <li>• <b>Flow control</b>—Types of flow control supported by the remote Ethernet device. For Gigabit Ethernet interfaces, types are <b>Symmetric</b> (link partner supports PAUSE on receive and transmit), <b>Asymmetric</b> (link partner supports PAUSE on transmit), and <b>Symmetric/Asymmetric</b> (link partner supports PAUSE on both receive and transmit or PAUSE only on receive). For asymmetric PAUSE, shows if the PAUSE transmit and PAUSE receive states on the interface are <b>enable</b> or <b>disable</b>.</li> <li>• <b>Remote fault</b>—Remote fault information. <b>Link OK</b> (no error detected on receive), <b>Offline</b> (local interface is offline), and <b>Link Failure</b> (link error detected on receive).</li> </ul> </li> </ul>	extensive
Packet Forwarding Engine configuration	<p>Information about the configuration of the Packet Forwarding Engine:</p> <ul style="list-style-type: none"> <li>• <b>Destination slot</b>—FPC slot number.</li> </ul>	extensive
Logical Interface		
Logical interface	Name of the logical interface.	All levels
Index	Index number of the logical interface, which reflects its initialization sequence.	detail extensive none
SNMP ifIndex	SNMP interface index number for the logical interface.	detail extensive none
Generation	Unique number for use by Juniper Networks technical support only.	detail extensive
Flags	Information about the logical interface.	All levels



Table 167: show interfaces ge Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Encapsulation</b>	Encapsulation on the logical interface.	All levels
<b>Protocol</b>	Protocol family.	<b>detail extensive none</b>
<b>Traffic statistics</b>	Number and rate of bytes and packets received (input) and transmitted (output) on the specified interface.	<b>detail extensive</b>
<b>IPv6 transit statistics</b>	If IPv6 statistics tracking is enabled, number of IPv6 bytes and packets received and transmitted on the logical interface.	<b>extensive</b>
<b>Local statistics</b>	Number and rate of bytes and packets destined to and from the switch.	<b>extensive</b>
<b>Transit statistics</b>	Number and rate of bytes and packets transiting the switch.	<b>extensive</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Route Table</b>	Route table in which the logical interface address is located. For example, <b>0</b> refers to the routing table <b>inet.0</b> .	<b>detail extensive none</b>
<b>Input Filters</b>	Names of any input filters applied to this interface.	<b>detail extensive</b>
<b>Output Filters</b>	Names of any output filters applied to this interface.	<b>detail extensive</b>
<b>Flags</b>	Information about protocol family flags.  If unicast reverse-path forwarding (RPF) is explicitly configured on the specified interface, the uRPF flag is displayed. If unicast RPF was configured on a different interface (and therefore is enabled on all switch interfaces) but was not explicitly configured on the specified interface, the uRPF flag is not displayed even though unicast RPF is enabled.	<b>detail extensive</b>
<b><i>protocol-family</i></b>	Protocol family configured on the logical interface. If the protocol is <b>inet</b> , the IP address of the interface is also displayed.	<b>brief</b>
<b>Flags</b>	Information about the address flags.	<b>detail extensive none</b>
<b>Destination</b>	IP address of the remote side of the connection.	<b>detail extensive none</b>
<b>Local</b>	IP address of the logical interface.	<b>detail extensive none</b>
<b>Broadcast</b>	Broadcast address of the logical interlace.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>



## Sample Output

### show interfaces

```

user@switch> show interfaces ge-0/0/9
Physical interface: ge-0/0/9, Enabled, Physical link is Down
  Interface index: 129, SNMP ifIndex: 21
  Link-level type: Ethernet, MTU: 1514, Speed: Unspecified, Loopback: Disabled,
  Source filtering: Disabled, Flow control: Enabled, Auto-negotiation: Enabled
  Remote fault: Online
  Device flags   : Present Running Down
  Interface flags: Hardware-Down SNMP-Traps Internal: 0x0
  CoS queues     : 8 supported, 8 maximum usable queues
  Hold-times     : Up 0 ms, Down 0 ms
  Current address: 00:19:e2:50:3f:41, Hardware address: 00:19:e2:50:3f:41
  Last flapped   : 2008-01-16 11:40:53 UTC (4d 02:30 ago)
  Input rate     : 0 bps (0 pps)
  Output rate    : 0 bps (0 pps)
  Ingress rate at Packet Forwarding Engine : 0 bps (0 pps)
  Ingress drop rate at Packet Forwarding Engine : 0 bps (0 pps)
  Active alarms  : None
  Active defects : None

  Logical interface ge-0/0/9.0 (Index 65) (SNMP ifIndex 22)
    Flags: SNMP-Traps
    Encapsulation: ENET2
    Input packets : 0
    Output packets: 0
    Protocol eth-switch
    Flags: None

```

### show interfaces brief

```

user@switch> show interfaces ge-0/0/9 brief
Physical interface: ge-0/0/9, Enabled, Physical link is Down
  Description: voice priority and tcp and icmp traffic rate-limiting filter at i
  ngress port
  Link-level type: Ethernet, MTU: 1514, Speed: Unspecified, Loopback: Disabled,
  Source filtering: Disabled, Flow control: Enabled, Auto-negotiation: Enabled,
  Remote fault: Online
  Device flags   : Present Running Down
  Interface flags: Hardware-Down SNMP-Traps Internal: 0x0
  Link flags     : None

  Logical interface ge-0/0/9.0
    Flags: Device-Down SNMP-Traps Encapsulation: ENET2
    eth-switch

```

### show interfaces detail (Symmetric Flow Control and

```

user@switch> show interfaces ge-0/0/9 detail
Physical interface: ge-0/0/9, Enabled, Physical link is Up
  Interface index: 193, SNMP ifIndex: 206, Generation: 196
  Link-level type: Ethernet, MTU: 1514, Speed: Auto, Duplex: Auto,

```



**Autonegotiation  
Enabled)**

```

BPDU Error: None, MAC-REWRITE Error: None, Loopback: Disabled,
Source filtering: Disabled, Flow control: Enabled, Auto-negotiation: Enabled,
Remote fault: Online
Device flags   : Present Running
Interface flags: SNMP-Traps Internal: 0x0
Link flags     : None
CoS queues     : 8 supported, 8 maximum usable queues
Hold-times     : Up 0 ms, Down 0 ms
Current address: 00:1f:12:30:ff:40, Hardware address: 00:1f:12:30:ff:40
Last flapped   : 2009-05-05 06:03:05 UTC (00:22:13 ago)
Statistics last cleared: Never
Traffic statistics:
  Input bytes   :                0                0 bps
  Output bytes  :                0                0 bps
  Input packets :                0                0 pps
  Output packets:                0                0 pps
IPv6 transit statistics:
  Input bytes   :                0
  Output bytes  :                0
  Input packets :                0
  Output packets:                0
Egress queues: 8 supported, 4 in use
Queue counters:      Queued packets  Transmitted packets  Dropped packets

  0 best-effort      0                0                0
  1 assured-forw     0                0                0
  5 expedited-fo     0                0                0
  7 network-cont     0                0                0

Active alarms : None
Active defects : None

```

```

Logical interface ge-0/0/9.0 (Index 65) (SNMP ifIndex 235) (Generation 130)
Flags: SNMP-Traps Encapsulation: ENET2
Bandwidth: 0
Traffic statistics:
  Input bytes   :                0
  Output bytes  :                0
  Input packets :                0
  Output packets:                0
Local statistics:
  Input bytes   :                0
  Output bytes  :                0
  Input packets :                0
  Output packets:                0
Transit statistics:
  Input bytes   :                0                0 bps
  Output bytes  :                0                0 bps
  Input packets :                0                0 pps
  Output packets:                0                0 pps
Protocol eth-switch, Generation: 146, Route table: 0
Flags: Is-Primary
Input Filters: f1,
Output Filters: f2,,,

```

**show interfaces detail  
(Asymmetric Flow**

```

user@switch> show interfaces ge-0/0/9 detail
Physical interface: ge-0/0/9, Enabled, Physical link is Up
Interface index: 193, SNMP ifIndex: 206, Generation: 196

```



### Control and Autonegotiation Enabled)

```

Link-level type: Ethernet, MTU: 1514, Speed: Auto, Duplex: Auto,
BPDU Error: None, MAC-REWRITE Error: None, Loopback: Disabled,
Source filtering: Disabled, Configured-flow-control tx-buffers: off
rx-buffers: on ,
Auto-negotiation: Enabled,
Remote fault: Online
Device flags   : Present Running
Interface flags: SNMP-Traps Internal: 0x0
Link flags     : None
CoS queues    : 8 supported, 8 maximum usable queues
Hold-times    : Up 0 ms, Down 0 ms
Current address: 00:1f:12:30:ff:40, Hardware address: 00:1f:12:30:ff:40
Last flapped   : 2009-05-05 06:03:05 UTC (00:22:13 ago)
Statistics last cleared: Never
Traffic statistics:
  Input bytes :                0                0 bps
  Output bytes :                0                0 bps
  Input packets:                0                0 pps
  Output packets:                0                0 pps
IPv6 transit statistics:
  Input bytes :                0
  Output bytes :                0
  Input packets:                0
  Output packets:                0
Egress queues: 8 supported, 4 in use
Queue counters:      Queued packets  Transmitted packets      Dropped packets

  0 best-effort                0                0                0
  1 assured-forw                0                0                0
  5 expedited-fo                0                0                0
  7 network-cont                0                0                0

Active alarms : None
Active defects : None

Logical interface ge-0/0/9.0 (Index 65) (SNMP ifIndex 235) (Generation 130)
Flags: SNMP-Traps Encapsulation: ENET2
Bandwidth: 0
Traffic statistics:
  Input bytes :                0
  Output bytes :                0
  Input packets:                0
  Output packets:                0
Local statistics:
  Input bytes :                0
  Output bytes :                0
  Input packets:                0
  Output packets:                0
Transit statistics:
  Input bytes :                0                0 bps
  Output bytes :                0                0 bps
  Input packets:                0                0 pps
  Output packets:                0                0 pps
Protocol eth-switch, Generation: 146, Route table: 0
Flags: Is-Primary
Input Filters: f1,
Output Filters: f2,,,,

```



**show interfaces  
extensive (Symmetric  
Flow Control and**

```
user@switch> show interfaces ge-0/0/12 extensive
interface: ge-0/0/12, Enabled, Physical link is Down
  Interface index: 49164, SNMP ifIndex: 574, Generation: 142
  Link-level type: Ethernet, MTU: 1514, Speed: 1000mbps, Duplex: Full-Duplex,
```



## Autonegotiation Enabled)

```

BPDU Error: None, MAC-REWRITE Error: None, Loopback: Disabled,
Source filtering: Disabled, Flow control: Enabled, Auto-negotiation: Enabled,
Remote fault: Online
Device flags   : Present Running Down
Interface flags: Hardware-Down SNMP-Traps Internal: 0x0
Link flags     : None
CoS queues    : 8 supported, 8 maximum usable queues
Hold-times    : Up 0 ms, Down 0 ms
Current address: 00:22:83:2a:d8:dc, Hardware address: 00:22:83:2a:d8:dc
Last flapped   : 2011-02-25 00:45:03 UTC (22:42:48 ago)
Statistics last cleared: Never
Traffic statistics:
  Input bytes   :                0                0 bps
  Output bytes  :                0                0 bps
  Input packets :                0                0 pps
  Output packets:                0                0 pps
IPv6 transit statistics:
  Input bytes   :                0
  Output bytes  :                0
  Input packets :                0
  Output packets:                0
Input errors:
  Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0,
  L3 incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0,
  FIFO errors: 0, Resource errors: 0
Output errors:
  Carrier transitions: 0, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,

  FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Egress queues: 8 supported, 8 in use
Queue counters:      Queued packets  Transmitted packets      Dropped packets

  0 best-effort                0                0                0
  2 no-loss                   0                0                0
  3 fcoe                      0                0                0
  7 network-cont              0                0                0

Queue number:      Mapped forwarding classes
  0                best-effort
  2                no-loss
  3                fcoe
  7                network-control
Active alarms : LINK
Active defects : LINK
MAC statistics:
  Receive          Transmit
  Total octets     0                0
  Total packets    0                0
  Unicast packets  0                0
  Broadcast packets 0                0
  Multicast packets 0                0
  CRC/Align errors 0                0
  FIFO errors       0                0
  MAC control frames 0                0
  MAC pause frames  0                0
  Oversized frames  0
  Jabber frames     0
  Fragment frames   0
  VLAN tagged frames 0

```



```

Code violations                                0
MAC Priority Flow Control Statistics:
  Priority : 0                                0          0
  Priority : 1                                0          0
  Priority : 2                                0          0
  Priority : 3                                0          0
  Priority : 4                                0          0
  Priority : 5                                0          0
  Priority : 6                                0          0
  Priority : 7                                0          0
Filter statistics:
  Input packet count                          0
  Input packet rejects                        0
  Input DA rejects                           0
  Input SA rejects                           0
  Output packet count                        0          0
  Output packet pad count                    0          0
  Output packet error count                  0          0
CAM destination filters: 1, CAM source filters: 0
Autonegotiation information:
  Negotiation status: Incomplete
Packet Forwarding Engine configuration:
  Destination slot: 0
CoS information:
  Direction : Output
  CoS transmit queue      Bandwidth      Buffer Priority
Limit
    %      bps      %      usec
0 best-effort      75      750000000      75      0      low
none
7 network-control   5       50000000      5       0      low
none
8 mcast-be         15      150000000      15      0      low
none
11 mcast-nc         5       50000000      5       0      low
none

```

#### show interfaces extensive (Asymmetric Flow Control and

```

user@switch> show interfaces ge-0/0/12 extensive
interface: ge-0/0/12, Enabled, Physical link is Down
Interface index: 49164, SNMP ifIndex: 574, Generation: 142
Link-level type: Ethernet, MTU: 1514, Speed: 1000mbps, Duplex: Full-Duplex,

```



## Autonegotiation Enabled)

```

BPDU Error: None, MAC-REWRITE Error: None, Loopback: Disabled,
Source filtering: Disabled, Configured-flow-control tx-buffers: off
rx-buffers: on
Auto-negotiation: Enabled,
Remote fault: Online
Device flags : Present Running Down
Interface flags: Hardware-Down SNMP-Traps Internal: 0x0
Link flags : None
CoS queues : 8 supported, 8 maximum usable queues
Hold-times : Up 0 ms, Down 0 ms
Current address: 00:22:83:2a:d8:dc, Hardware address: 00:22:83:2a:d8:dc
Last flapped : 2011-02-25 00:45:03 UTC (22:42:48 ago)
Statistics last cleared: Never
Traffic statistics:
Input bytes : 0 0 bps
Output bytes : 0 0 bps
Input packets: 0 0 pps
Output packets: 0 0 pps
IPv6 transit statistics:
Input bytes : 0
Output bytes : 0
Input packets: 0
Output packets: 0
Input errors:
Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0,
L3 incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0,
FIFO errors: 0, Resource errors: 0
Output errors:
Carrier transitions: 0, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,

FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Egress queues: 8 supported, 8 in use
Queue counters:      Queued packets  Transmitted packets      Dropped packets

0 best-effort          0              0              0
2 no-loss              0              0              0
3 fcoe                 0              0              0
7 network-cont         0              0              0

Queue number:      Mapped forwarding classes
0                  best-effort
2                  no-loss
3                  fcoe
7                  network-control
Active alarms : LINK
Active defects : LINK
MAC statistics:
Total octets          Receive      Transmit
Total packets         0            0
Unicast packets       0            0
Broadcast packets     0            0
Multicast packets     0            0
CRC/Align errors      0            0
FIFO errors           0            0
MAC control frames    0            0
MAC pause frames      0            0
Oversized frames      0
Jabber frames         0

```



```

Fragment frames                                0
VLAN tagged frames                             0
Code violations                                0
MAC Priority Flow Control Statistics:
Priority : 0                                    0          0
Priority : 1                                    0          0
Priority : 2                                    0          0
Priority : 3                                    0          0
Priority : 4                                    0          0
Priority : 5                                    0          0
Priority : 6                                    0          0
Priority : 7                                    0          0
Filter statistics:
Input packet count                             0
Input packet rejects                           0
Input DA rejects                               0
Input SA rejects                               0
Output packet count                            0
Output packet pad count                        0
Output packet error count                      0
CAM destination filters: 1, CAM source filters: 0
Autonegotiation information:
Negotiation status: Complete
Link Partner:
Link mode: Full-duplex, Flow control: None, Remote fault: OK,
Link partner Speed: 1000 Mbps
Local resolution:
Flow control: enable PAUSE transmit and Disable PAUSE receive, Remote
fault: Link OK
Packet Forwarding Engine configuration:
Destination slot: 0
CoS information:
Direction : Output
CoS transmit queue      Bandwidth      Buffer Priority
Limit
0 best-effort           75      750000000    75      usec      low
none
7 network-control       5       500000000     5       0        low
none
8 mcast-be              15      1500000000    15      0        low
none
11 mcast-nc             5       500000000     5       0        low
none

```

**show interfaces terse**

```

user@switch> show interfaces ge-0/0/12 terse
Interface      Admin Link Proto  Local      Remote
ge-0/0/12      up      up

```

**show interfaces terse (QFabric Systems)**

```

user@switch> show interfaces nodel:ge-0/0/0 terse
Physical interface: nodel:ge-0/0/0, Enabled, Physical link is Down
Interface index: 129, SNMP ifIndex: 2884086
Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
Error: None, MAC-REWRITE Error: None,
Loopback: Disabled, Source filtering: Disabled, Flow control: Enabled
Interface flags: Internal: 0x4000
CoS queues      : 8 supported, 8 maximum usable queues
Current address: 02:00:09:03:00:00, Hardware address: 02:00:09:03:00:00
Last flapped    : Never
Input rate      : 0 bps (0 pps)

```



Output rate : 0 bps (0 pps)



## show interfaces mc-ae

<b>Syntax</b>	<b>show interfaces mc-ae id <i>identifier</i> unit <i>number</i></b>
<b>Release Information</b>	Command introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	On peers with multi-chassis aggregated Ethernet ( <b>mc-aeX</b> ) interfaces, use this command to display information about the <b>mc-aeX</b> interfaces.
<b>Options</b>	<p><b>identifier</b>—(Optional) Name of the multichassis aggregated Ethernet interface.</p> <p><b>number</b>—(Optional) Specify the logical interface by unit number.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show interfaces mc-ae on page 2185</a>
<b>Output Fields</b>	<a href="#">Table 168 on page 2184</a> lists the output fields for the <b>show interfaces mc-ae</b> command. Output fields are listed in the approximate order in which they appear.

**Table 168: show interfaces mc-ae Output Fields**

Output Field Name	Field Description
<b>Current State Machine's State</b>	Specifies the state of the MC-LAG initialization state machine.
<b>Member Link</b>	Specifies the identifiers of the configured multichassis link aggregated interface members.
<b>Local Status</b>	Specifies the status of the local link: <b>active</b> or <b>standby</b> .
<b>Peer Status</b>	Specifies the status of the peer link: <b>active</b> or <b>standby</b> .
<b>Peer State</b>	Specifies the status of the local and peer links in an <b>active/active</b> MC-LAG configuration
<b>Logical Interface</b>	Specifies the identifier and unit of the AE interface.
<b>Topology Type</b>	Specifies the bridge configured on the AE.
<b>Local State</b>	Specifies if the local device is up or down.
<b>Peer State</b>	Specifies if the peer device is up or down.
<b>Peer Ip/MCP/State</b>	Specifies the multichassis protection (MCP) link or the interchassis link-protection link (ICL-PL) for all of the multichassis aggregated Ethernet (MC-AE) interfaces that are part of the peer.



## Sample Output

```
show interfaces mc-ae    user@host> show interfaces mc-ae ae1 512
Member Link              : ae0
Current State Machine's State: mcae active state
Local Status             : active
Local State              : up
Peer Status              : active
Peer State               : up
  Logical Interface      : ae0.0
  Topology Type          : bridge
  Local State            : up
  Peer State             : up
  Peer Ip/MCP/State      : 3.3.3.2 ae1.0 up
```



## show interfaces statistics fabric

---

<b>Syntax</b>	<code>show interfaces statistics fabric</code> <code>&lt;brief   detail   terse&gt;</code> <code>&lt;descriptions&gt;</code> <code>&lt;interface-name&gt;</code> <code>&lt;media&gt;</code> <code>&lt;routing-instance (all   instance-name)&gt;</code> <code>&lt;snmp-index snmp-index&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 12.3 for the QFX Series.
<b>Description</b>	Display status information about the specified fabric interface.
<b>Options</b>	<p><b>brief   detail   terse</b>—(Optional) Display the specified level of output.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>interface-name</b>—(QFabric systems only) The interface name is either the serial number or the alias of the QFabric switch component, such as a Node device, Interconnect device, or QFabric infrastructure. The name must contain a maximum of 128 characters and not contain any colons.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>routing-instance (all   instance-name)</b>—(Optional) Display all routing instances or the name of an individual routing instance.</p> <p><b>snmp-index snmp-index</b>—(Optional) Display information for the specified SNMP index of the interface.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Monitoring Interface Status and Traffic on page 279</a></li><li>• <a href="#">Troubleshooting Network Interfaces on page 1106</a></li><li>• <a href="#">Troubleshooting an Aggregated Ethernet Interface on page 1107</a></li><li>• <a href="#">Junos® OS Network Interfaces</a></li></ul>
<b>List of Sample Output</b>	<a href="#">show interfaces statistics fabric on page 2192</a> <a href="#">show interfaces statistics fabric brief on page 2198</a> <a href="#">show interfaces statistics fabric detail on page 2201</a> <a href="#">show interfaces statistics fabric terse on page 2203</a> <a href="#">show interfaces statistics fabric device-name on page 2204</a>
<b>Output Fields</b>	<a href="#">Table 169 on page 2187</a> lists the output fields for the <b>show interfaces statistics fabric</b> command. Output fields are listed in the approximate order in which they appear.



Table 169: show interfaces statistics fabric Output Fields

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		
Physical interface	Name of the physical interface.	All levels
Enabled	State of the interface.	All levels
Interface index	Index number of the physical interface, which reflects its initialization sequence.	detail none
SNMP ifIndex	SNMP index number for the physical interface.	detail none
Link-level type	Encapsulation being used on the physical interface.	All levels
MTU	Maximum transmission unit size on the physical interface.	All levels
Clocking	Reference clock source.	detail
Speed	Speed at which the interface is running.	All levels
Duplex	Duplex mode of the interface, either Full-Duplex or Half-Duplex.	All levels
MAC-REWRITE Error	Specifies if the encapsulation of the packet has been changed.	none
BPDU Error	Specifies if a BPDU has been received on a blocked interface.	none
Loopback	Loopback status: Enabled or Disabled. If loopback is enabled, type of loopback: Local or Remote.	All levels
Source filtering	Source filtering status: Enabled or Disabled.	All levels
Flow control	Flow control status: Enabled or Disabled. This field is only displayed if asymmetric flow control is not configured.	All levels
Device flags	Information about the physical device.	All levels
Interface flags	Information about the interface.	All levels
CoS queues	Number of CoS queues configured.	detail none
Hold-Times	Current interface hold-time up and hold-time down, in milliseconds.	detail
Current address	Configured MAC address.	detail none
Hardware address	Hardware MAC address.	detail none
Last flapped	Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: year-month-day hour:minute:second:timezone (hour:minute:second ago)</b> . For example, <b>Last flapped: 2008-01-16 10:52:40 UTC (3d 22:58 ago)</b> .	detail none



Table 169: show interfaces statistics fabric Output Fields (*continued*)

Field Name	Field Description	Level of Output
Statistics last cleared	Date, time, and how long ago the statistics for the interface were cleared. The format is <b>Statistics last cleared: year-month-day hour:minute:second:timezone (hour:minute:second ago)</b> . For example, 2010-05-17 07:51:28 PDT (00:04:33 ago).	detail
Traffic statistics	<p>Number and rate of bytes and packets received and transmitted on the physical interface.</p> <ul style="list-style-type: none"> <li>Input bytes—Number of bytes received on the interface.</li> <li>Output bytes—Number of bytes transmitted on the interface.</li> <li>Input packets—Number of packets received on the interface.</li> <li>Output packets—Number of packets transmitted on the interface.</li> </ul> <p><b>NOTE:</b> The bandwidth bps counter is not enabled.</p>	detail
IPv6 transit statistics	<p>If IPv6 statistics tracking is enabled, number of IPv6 bytes and packets received and transmitted on the logical interface:</p> <ul style="list-style-type: none"> <li>Input bytes—Number of bytes received on the interface.</li> <li>Output bytes—Number of bytes transmitted on the interface.</li> <li>Input packets—Number of packets received on the interface.</li> <li>Output packets—Number of packets transmitted on the interface.</li> </ul> <p><b>NOTE:</b> The bandwidth bps counter is not enabled.</p>	detail
Input errors	<p>Input errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>Errors—Sum of the incoming frame aborts and FCS errors.</li> <li>Drops—Number of packets dropped by the input queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>Framing errors—Number of packets received with an invalid frame checksum (FCS).</li> <li>Runts—Number of frames received that are smaller than the runt threshold.</li> <li>Policed discards—Number of frames that the incoming packet match code discarded because they were not recognized or not of interest. Usually, this field reports protocols that Junos OS does not handle.</li> <li>L3 incompletes—Number of incoming packets discarded because they failed Layer 3 sanity checks of the header. For example, a frame with less than 20 bytes of available IP header is discarded. L3 incomplete errors can be ignored if you configure the ignore-l3-incompletes statement.</li> <li>L2 channel errors—Number of times the software did not find a valid logical interface for an incoming frame.</li> <li>L2 mismatch timeouts—Number of malformed or short packets that caused the incoming packet handler to discard the frame as unreadable.</li> <li>FIFO errors—Number of FIFO errors in the receive direction that are reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>Resource errors—Sum of transmit drops.</li> </ul>	detail none



Table 169: show interfaces statistics fabric Output Fields (*continued*)

Field Name	Field Description	Level of Output
Output errors	<p>Output errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>Carrier transitions—Number of times the interface has gone from down to up. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and then up, or another problem occurs. If the number of carrier transitions increments quickly (perhaps once every 10 seconds), the cable, the far-end system, or the PIC or PIM is malfunctioning.</li> <li>Errors—Sum of the outgoing frame aborts and FCS errors.</li> <li>Drops—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>Collisions—Number of Ethernet collisions. The Gigabit Ethernet PIC supports only full-duplex operation, so for Gigabit Ethernet PICs, this number should always remain 0. If it is nonzero, there is a software bug.</li> <li>Aged packets—Number of packets that remained in shared packet SDRAM so long that the system automatically purged them. The value in this field should never increment. If it does, it is most likely a software bug or possibly malfunctioning hardware.</li> <li>FIFO errors—Number of FIFO errors in the send direction as reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>HS link CRC errors—Number of errors on the high-speed links between the ASICs responsible for handling the fabric interfaces.</li> <li>MTU errors—Number of packets whose size exceeded the MTU of the interface.</li> <li>Resource errors—Sum of transmit drops.</li> </ul>	detail none
Egress queues	Total number of egress queues supported on the specified interface.	detail
Queue counters	<p>CoS queue number and its associated user-configured forwarding class name.</p> <ul style="list-style-type: none"> <li>Queued packets—Number of queued packets.</li> <li>Transmitted packets—Number of transmitted packets.</li> <li>Dropped packets—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>	detail
Input rate	Input rate in bits per second (bps) and packets per second (pps).	None specified
Output rate	Output rate in bps and pps.	None specified
<b>Logical Interface</b>		
Logical interface	Name of the logical interface.	All levels
Index	Index number of the logical interface, which reflects its initialization sequence.	detail none
SNMP ifIndex	SNMP interface index number for the logical interface.	detail none



Table 169: show interfaces statistics fabric Output Fields (*continued*)

Field Name	Field Description	Level of Output
Flags	<p>Information about the logical interface.</p> <p>If unicast Reverse Path Forwarding (uRPF) is explicitly configured on the specified interface, the uRPF flag appears. If uRPF was configured on a different interface (and therefore is enabled on all switch interfaces) but was not explicitly configured on the specified interface, the uRPF flag does not appear even though uRPF is enabled.</p>	All levels
Input packets	Number of packets received on the interface.	detail none
Output packets	Number of packets transmitted on the interface.	detail none
Encapsulation	<p>Encapsulation method used on the logical interface.</p> <ul style="list-style-type: none"> <li>Input packets—Number of packets received on the interface.</li> <li>Output packets—Number of packets transmitted on the interface.</li> </ul>	All levels
Traffic statistics	<p>Number and rate of bytes and packets received and transmitted on the physical interface.</p> <ul style="list-style-type: none"> <li>Input bytes—Number of bytes received on the interface.</li> <li>Output bytes—Number of bytes transmitted on the interface.</li> <li>Input packets—Number of packets received on the interface.</li> <li>Output packets—Number of packets transmitted on the interface.</li> </ul> <p><b>NOTE:</b> The bandwidth bps counter is not enabled.</p>	detail
Local statistics	<ul style="list-style-type: none"> <li>Input bytes—Number of bytes received on the interface.</li> <li>Output bytes—Number of bytes transmitted on the interface.</li> <li>Input packets—Number of packets received on the interface.</li> <li>Output packets—Number of packets transmitted on the interface.</li> </ul> <p><b>NOTE:</b> The bandwidth bps counter is not enabled.</p>	detail
Transit statistics	<ul style="list-style-type: none"> <li>Input bytes—Number of bytes received on the interface.</li> <li>Output bytes—Number of bytes transmitted on the interface.</li> <li>Input packets—Number of packets received on the interface.</li> <li>Output packets—Number of packets transmitted on the interface.</li> </ul> <p><b>NOTE:</b> The bandwidth bps counter is not enabled.</p>	detail
Addresses, Flags	Information about the address flags.	detail none
<i>protocol-family</i>	Protocol family configured on the logical interface. If the protocol is <b>inet</b> , the IP address of the interface is also displayed.	brief
MTU	Maximum transmission unit size on the physical interface.	All levels
Destination	IP address of the remote side of the connection.	detail none



Table 169: show interfaces statistics fabric Output Fields (*continued*)

Field Name	Field Description	Level of Output
Local	IP address of the logical interface.	detail none
Broadcast	Broadcast address of the logical interlace.	detail none
Generation	Unique number for use by Juniper Networks technical support only.	detail
Route table	Route table in which the logical interface address is located. For example, 0 refers to the routing table inet.0.	detail none



## Sample Output

### show interfaces statistics fabric

```
user@switch> show interfaces statistic fabric
Physical interface: IC-WS001:fte-0/0/0, Enabled, Physical link is Down
  Interface index: 49174, SNMP ifIndex: 1208484473
  Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled, Flow control: Disabled
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x0
  CoS queues    : 12 supported, 12 maximum usable queues
  Current address: 00:00:00:00:00:00, Hardware address: 00:00:00:00:00:00
  Last flapped  : 2012-11-27 20:30:30 UTC (01:55:19 ago)
  Statistics last cleared: Never
  Input rate    : 0 bps (0 pps)
  Output rate   : 0 bps (0 pps)
  Input errors: 0, Output errors: 0

Logical interface IC-WS001:fte-0/0/0.32768 (Index 83) (SNMP ifIndex 1208484474)

  Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2
  Input packets : 0
  Output packets: 0
  Protocol eth-switch, MTU: 0

Physical interface: IC-WS001:fte-0/0/4, Enabled, Physical link is Down
  Interface index: 49175, SNMP ifIndex: 1208484363
  Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled, Flow control: Disabled
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x0
  CoS queues    : 12 supported, 12 maximum usable queues
  Current address: 00:00:00:00:00:04, Hardware address: 00:00:00:00:00:04
  Last flapped  : 2012-11-27 20:30:30 UTC (01:55:20 ago)
  Statistics last cleared: Never
  Input rate    : 0 bps (0 pps)
  Output rate   : 0 bps (0 pps)
  Input errors: 0, Output errors: 0

Logical interface IC-WS001:fte-0/0/4.32768 (Index 84) (SNMP ifIndex 1208484364)

  Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2
  Input packets : 0
  Output packets: 0
  Protocol eth-switch, MTU: 0

Physical interface: IC-WS001:fte-0/0/6, Enabled, Physical link is Down
  Interface index: 49176, SNMP ifIndex: 1208484367
  Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled, Flow control: Disabled
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x0
  CoS queues    : 12 supported, 12 maximum usable queues
  Current address: 00:00:00:00:00:06, Hardware address: 00:00:00:00:00:06
  Last flapped  : 2012-11-27 20:30:30 UTC (01:55:20 ago)
  Statistics last cleared: Never
  Input rate    : 0 bps (0 pps)
  Output rate   : 0 bps (0 pps)
```



Input errors: 0, Output errors: 0

Logical interface IC-WS001:fte-0/0/6.32768 (Index 85) (SNMP ifIndex 1208484368)

Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2

Input packets : 0

Output packets: 0

Protocol eth-switch, MTU: 0

Physical interface: IC-WS001:fte-0/0/13, Enabled, Physical link is Down

Interface index: 49177, SNMP ifIndex: 1208484479

Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex, BPDU

Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:

Disabled, Flow control: Disabled

Device flags : Present Running

Interface flags: SNMP-Traps Internal: 0x0

CoS queues : 12 supported, 12 maximum usable queues

Current address: 00:00:00:00:00:0d, Hardware address: 00:00:00:00:00:0d

Last flapped : 2012-11-27 20:30:30 UTC (01:55:20 ago)

Statistics last cleared: Never

Input rate : 0 bps (0 pps)

Output rate : 0 bps (0 pps)

Input errors: 0, Output errors: 0

Logical interface IC-WS001:fte-0/0/13.32768 (Index 86) (SNMP ifIndex 1208484480)

Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2

Input packets : 0

Output packets: 0

Protocol eth-switch, MTU: 0

Physical interface: IC-WS001:fte-0/0/15, Enabled, Physical link is Down

Interface index: 49178, SNMP ifIndex: 1208484475

Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex, BPDU

Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:

Disabled, Flow control: Disabled

Device flags : Present Running

Interface flags: SNMP-Traps Internal: 0x0

CoS queues : 12 supported, 12 maximum usable queues

Current address: 00:00:00:00:00:0f, Hardware address: 00:00:00:00:00:0f

Last flapped : 2012-11-27 20:30:30 UTC (01:55:20 ago)

Statistics last cleared: Never

Input rate : 0 bps (0 pps)

Output rate : 0 bps (0 pps)

Input errors: 0, Output errors: 0

Logical interface IC-WS001:fte-0/0/15.32768 (Index 87) (SNMP ifIndex 1208484476)

Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2

Input packets : 0

Output packets: 0

Protocol eth-switch, MTU: 0

Physical interface: IC-WS001:fte-1/0/2, Enabled, Physical link is Down

Interface index: 49211, SNMP ifIndex: 1208484377

Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex, BPDU

Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:

Disabled, Flow control: Disabled

Device flags : Present Running

Interface flags: SNMP-Traps Internal: 0x0

CoS queues : 12 supported, 12 maximum usable queues



Current address: 00:00:00:00:00:02, Hardware address: 00:00:00:00:00:02  
Last flapped : 2012-11-27 20:30:47 UTC (01:55:03 ago)  
Statistics last cleared: Never  
Input rate : 0 bps (0 pps)  
Output rate : 0 bps (0 pps)  
Input errors: 0, Output errors: 0

Logical interface IC-WS001:fte-1/0/2.32768 (Index 120) (SNMP ifIndex 1208484378)

Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2  
Input packets : 0  
Output packets: 0  
Protocol eth-switch, MTU: 0

Physical interface: IC-WS001:fte-1/0/7, Enabled, Physical link is Down  
Interface index: 49212, SNMP ifIndex: 1208484365  
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex, BPDU  
Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:  
Disabled, Flow control: Disabled  
Device flags : Present Running  
Interface flags: SNMP-Traps Internal: 0x0  
CoS queues : 12 supported, 12 maximum usable queues  
Current address: 00:00:00:00:00:07, Hardware address: 00:00:00:00:00:07  
Last flapped : 2012-11-27 20:30:47 UTC (01:55:04 ago)  
Statistics last cleared: Never  
Input rate : 0 bps (0 pps)  
Output rate : 0 bps (0 pps)  
Input errors: 0, Output errors: 0

Logical interface IC-WS001:fte-1/0/7.32768 (Index 121) (SNMP ifIndex 1208484366)

Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2  
Input packets : 0  
Output packets: 0  
Protocol eth-switch, MTU: 0

Physical interface: IC-WS001:fte-1/0/10, Enabled, Physical link is Down  
Interface index: 49213, SNMP ifIndex: 1208484625  
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex, BPDU  
Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:  
Disabled, Flow control: Disabled  
Device flags : Present Running  
Interface flags: SNMP-Traps Internal: 0x0  
CoS queues : 12 supported, 12 maximum usable queues  
Current address: 00:00:00:00:00:0a, Hardware address: 00:00:00:00:00:0a  
Last flapped : 2012-11-27 20:30:47 UTC (01:55:04 ago)  
Statistics last cleared: Never  
Input rate : 0 bps (0 pps)  
Output rate : 0 bps (0 pps)  
Input errors: 0, Output errors: 0

Logical interface IC-WS001:fte-1/0/10.32768 (Index 122) (SNMP ifIndex 1208484626)

Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2  
Input packets : 0  
Output packets: 0  
Protocol eth-switch, MTU: 0

Physical interface: IC-WS001:bme0, Enabled, Physical link is Up  
Interface index: 64, SNMP ifIndex: 1208483877  
Type: Ethernet, Link-level type: Ethernet, MTU: 1500



```

Device flags   : Present Running
Current address: 02:00:00:00:40:06, Hardware address: 02:00:00:00:40:01
Last flapped   : Never
Statistics last cleared: Never
  Input packets : 0
  Output packets: 26730
Input errors: 0, Output errors: 0

Logical interface IC-WS001:bme0.0 (Index 4) (SNMP ifIndex 1208484065)
  Flags: LinkAddress 0-0 Encapsulation: ENET2
  Input packets : 2715
  Output packets: 18
  Protocol inet, MTU: 1482
    Local: 128.0.32.0

Logical interface IC-WS001:bme0.1 (Index 5) (SNMP ifIndex 1208484091)
  Flags: LinkAddress 0-0 Encapsulation: ENET2
  Input packets : 0
  Output packets: 999
  Protocol inet, MTU: 1482
    Addresses
      Destination: 128/2, Local: 128.0.0.6, Broadcast: 191.255.255.255
      Destination: 128/2, Local: 128.0.130.2, Broadcast: 191.255.255.255

Logical interface IC-WS001:bme0.2 (Index 6) (SNMP ifIndex 1208484092)
  Flags: Encapsulation: ENET2
  Input packets : 180408
  Output packets: 23051
  Protocol inet, MTU: 1486
    Destination: 128/8, Local: 128.0.0.6, Broadcast: 128.255.255.255
    Destination: 128/8, Local: 128.0.130.2, Broadcast: 128.255.255.255
    Destination: 169.254/16, Local: 169.254.128.6, Broadcast: 169.254.255.255
    Destination: 169.254/16, Local: 169.254.193.1, Broadcast: 169.254.255.255

Physical interface: IC-WS001:bme1, Enabled, Physical link is Up
Interface index: 49156, SNMP ifIndex: 1208483949
Type: Ethernet, Link-level type: Ethernet, MTU: 1514, Speed: 1000mbps
Device flags   : Present Running
Interface flags: SNMP-Traps
Link type      : Full-Duplex
Current address: 00:0d:0c:0f:00:03, Hardware address: 00:0d:0c:0f:00:03
Last flapped   : 1970-01-01 00:00:01 UTC (2238w5d 22:25 ago)
Statistics last cleared: Never
  Input packets : 168885
  Output packets: 184712
Input errors: 0, Output errors: 0

Logical interface IC-WS001:bme1.0 (Index 3) (SNMP ifIndex 1208483950)
  Flags: Encapsulation: ENET2
  Input packets : 168885
  Output packets: 184712
  Protocol inet, MTU: 1500
    Destination: 128/2, Local: 128.0.0.1, Broadcast: 191.255.255.255
    Destination: 128/2, Local: 128.0.0.5, Broadcast: 191.255.255.255
    Destination: 128/2, Local: 128.0.0.16, Broadcast: 191.255.255.255
    Destination: 128/2, Local: 128.0.0.17, Broadcast: 191.255.255.255
    Destination: 128/2, Local: 128.0.0.24, Broadcast: 191.255.255.255
    Destination: 128/2, Local: 128.0.0.25, Broadcast: 191.255.255.255
    Destination: 128/2, Local: 128.0.0.26, Broadcast: 191.255.255.255
    Destination: 128/2, Local: 128.0.0.28, Broadcast: 191.255.255.255

```



Destination: 128/2, Local: 128.0.0.29, Broadcast: 191.255.255.255  
Destination: 128/2, Local: 128.0.0.31, Broadcast: 191.255.255.255  
Protocol tnp, MTU: 1500  
Local: 0x5

Physical interface: IC-WS001:dcfabric, Enabled, Physical link is Up  
Interface index: 27, SNMP ifIndex: 1208484093  
Type: Ethernet, Link-level type: Ethernet, MTU: 1572  
Device flags : Present Running  
Interface flags: SNMP-Traps  
Current address: 00:0b:ca:fe:00:01, Hardware address: 00:0b:ca:fe:00:01  
Last flapped : Never  
Statistics last cleared: Never  
Input packets : 0  
Output packets: 0  
Input errors: 0, Output errors: 0

Logical interface IC-WS001:dcfabric.0 (Index 64) (SNMP ifIndex 1208484094)  
Flags: SNMP-Traps Encapsulation: ENET2  
Input packets : 0  
Output packets: 0  
Protocol inet, MTU: 1558  
Protocol mpls, MTU: 1546, Maximum labels: 3  
Protocol eth-switch, MTU: 0

Physical interface: IC-WS001:pme0, Enabled, Physical link is Up  
Interface index: 66, SNMP ifIndex: 1208484104  
Type: Ethernet, Link-level type: Ethernet, MTU: 1510, Speed: 1000mbps  
Device flags : Present Running  
Interface flags: SNMP-Traps  
Link type : Full-Duplex  
Current address: 00:23:9c:f1:a2:e6, Hardware address: 00:23:9c:f1:a2:e6  
Last flapped : Never  
Statistics last cleared: Never  
Input packets : 1007238  
Output packets: 63383  
Input errors: 0, Output errors: 0

Physical interface: IC-WS001:pme1, Enabled, Physical link is Up  
Interface index: 67, SNMP ifIndex: 1208484105  
Type: Ethernet, Link-level type: Ethernet, MTU: 1510, Speed: 1000mbps  
Device flags : Present Running  
Interface flags: SNMP-Traps  
Link type : Full-Duplex  
Current address: 00:23:9c:f1:a2:e7, Hardware address: 00:23:9c:f1:a2:e7  
Last flapped : Never  
Statistics last cleared: Never  
Input packets : 1007118  
Output packets: 55381  
Input errors: 0, Output errors: 0

Physical interface: IC-WS001:pme2, Enabled, Physical link is Down  
Interface index: 68, SNMP ifIndex: 1208484106  
Type: Ethernet, Link-level type: Ethernet, MTU: 1510, Speed: 1000mbps  
Device flags : Present Running  
Interface flags: SNMP-Traps  
Link type : Full-Duplex  
Current address: 00:23:9c:f1:a2:e8, Hardware address: 00:23:9c:f1:a2:e8  
Last flapped : 2012-11-27 02:52:03 UTC (19:33:54 ago)  
Statistics last cleared: Never  
Input packets : 0



```
Output packets: 0
Input errors: 0, Output errors: 0

Physical interface: IC-WS001:pme3, Enabled, Physical link is Down
Interface index: 69, SNMP ifIndex: 1208484107
Type: Ethernet, Link-level type: Ethernet, MTU: 1510, Speed: 1000mbps
Device flags : Present Running
Interface flags: SNMP-Traps
Link type : Full-Duplex
Current address: 00:23:9c:f1:a2:e9, Hardware address: 00:23:9c:f1:a2:e9
Last flapped : 2012-11-27 02:52:03 UTC (19:33:54 ago)
Statistics last cleared: Never
Input packets : 0
Output packets: 0
Input errors: 0, Output errors: 0

Physical interface: IC-WS001:vcp0, Enabled, Physical link is Up
Interface index: 74, SNMP ifIndex: 1208484372
Type: Ethernet, Link-level type: 70, MTU: 1514, Speed: 1000mbps
Device flags : Present Running
Link type : Full-Duplex
Current address: 00:23:9c:f1:a2:e3, Hardware address: 00:23:9c:f1:a2:e3
Last flapped : Never
Statistics last cleared: Never
Input packets : 121842
Output packets: 3548
Input errors: 0, Output errors: 0

Logical interface IC-WS001:vcp0.32769 (Index 11) (SNMP ifIndex 1208484376)
Flags: LinkAddress 0-0 Encapsulation: ENET2
Input packets : 13044
Output packets: 3548

Physical interface: IC-WS001:vcp1, Enabled, Physical link is Up
Interface index: 70, SNMP ifIndex: 1208484108
Type: Ethernet, Link-level type: 70, MTU: 1492, Speed: 1000mbps
Device flags : Present Running
Link type : Full-Duplex
Current address: 00:23:9c:f1:a2:e6, Hardware address: 00:23:9c:f1:a2:e6
Last flapped : Never
Statistics last cleared: Never
Input packets : 767413
Output packets: 46503
Input errors: 0, Output errors: 0

Logical interface IC-WS001:vcp1.32768 (Index 7) (SNMP ifIndex 1208484109)
Flags: LinkAddress 0-0 Encapsulation: ENET2
Input packets : 735889
Output packets: 46503

Physical interface: IC-WS001:vcp2, Enabled, Physical link is Up
Interface index: 71, SNMP ifIndex: 1208484369
Type: Ethernet, Link-level type: 70, MTU: 1492, Speed: 1000mbps
Device flags : Present Running
Link type : Full-Duplex
Current address: 00:23:9c:f1:a2:e7, Hardware address: 00:23:9c:f1:a2:e7
Last flapped : Never
Statistics last cleared: Never
Input packets : 831710
Output packets: 44548
Input errors: 0, Output errors: 0
```



```
Logical interface IC-WS001:vcp2.32768 (Index 8) (SNMP ifIndex 1208484373)
  Flags: LinkAddress 0-0 Encapsulation: ENET2
  Input packets : 737844
  Output packets: 44548
```

```
Physical interface: IC-WS001:vcp3, Enabled, Physical link is Down
  Interface index: 72, SNMP ifIndex: 1208484370
  Type: Ethernet, Link-level type: 70, MTU: 1492, Speed: 1000mbps
  Device flags   : Present Running
  Link type      : Full-Duplex
  Current address: 00:23:9c:f1:a2:e8, Hardware address: 00:23:9c:f1:a2:e8
  Last flapped   : 2012-11-27 20:31:36 UTC (01:54:21 ago)
  Statistics last cleared: Never
    Input packets : 0
    Output packets: 0
  Input errors: 0, Output errors: 0
```

```
Logical interface IC-WS001:vcp3.32768 (Index 9) (SNMP ifIndex 1208484374)
  Flags: LinkAddress 0-0 Encapsulation: ENET2
  Input packets : 0
  Output packets: 0
```

```
Physical interface: IC-WS001:vcp4, Enabled, Physical link is Down
  Interface index: 73, SNMP ifIndex: 1208484371
  Type: Ethernet, Link-level type: 70, MTU: 1492, Speed: 1000mbps
  Device flags   : Present Running
  Link type      : Full-Duplex
  Current address: 00:23:9c:f1:a2:e9, Hardware address: 00:23:9c:f1:a2:e9
  Last flapped   : 2012-11-27 20:31:36 UTC (01:54:21 ago)
  Statistics last cleared: Never
    Input packets : 0
    Output packets: 0
  Input errors: 0, Output errors: 0
```

```
Logical interface IC-WS001:vcp4.32768 (Index 10) (SNMP ifIndex 1208484375)
  Flags: LinkAddress 0-0 Encapsulation: ENET2
  Input packets : 0
  Output packets: 0
```

#### **show interfaces statistics fabric brief**

```
user@switch> show interfaces statistics fabric brief
Physical interface: IC-WS001:fte-0/0/0, Enabled, Physical link is Down
  Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,
  Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x0
```

```
Logical interface IC-WS001:fte-0/0/0.32768
  Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2
  eth-switch
```

```
Physical interface: IC-WS001:fte-0/0/4, Enabled, Physical link is Down
  Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,
  Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x0
```

```
Logical interface IC-WS001:fte-0/0/4.32768
  Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2
  eth-switch
```



Physical interface: IC-WS001:fte-0/0/6, Enabled, Physical link is Down  
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,  
Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled  
Device flags : Present Running  
Interface flags: SNMP-Traps Internal: 0x0

Logical interface IC-WS001:fte-0/0/6.32768  
Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2  
eth-switch

Physical interface: IC-WS001:fte-0/0/13, Enabled, Physical link is Down  
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,  
Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled  
Device flags : Present Running  
Interface flags: SNMP-Traps Internal: 0x0

Logical interface IC-WS001:fte-0/0/13.32768  
Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2  
eth-switch

Physical interface: IC-WS001:fte-0/0/15, Enabled, Physical link is Down  
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,  
Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled  
Device flags : Present Running  
Interface flags: SNMP-Traps Internal: 0x0

Logical interface IC-WS001:fte-0/0/15.32768  
Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2  
eth-switch

Physical interface: IC-WS001:fte-1/0/2, Enabled, Physical link is Down  
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,  
Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled  
Device flags : Present Running  
Interface flags: SNMP-Traps Internal: 0x0

Logical interface IC-WS001:fte-1/0/2.32768  
Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2  
eth-switch

Physical interface: IC-WS001:fte-1/0/7, Enabled, Physical link is Down  
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,  
Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled  
Device flags : Present Running  
Interface flags: SNMP-Traps Internal: 0x0

Logical interface IC-WS001:fte-1/0/7.32768  
Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2  
eth-switch

Physical interface: IC-WS001:fte-1/0/10, Enabled, Physical link is Down  
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex,  
Loopback: Disabled, Source filtering: Disabled, Flow control: Disabled  
Device flags : Present Running  
Interface flags: SNMP-Traps Internal: 0x0

Logical interface IC-WS001:fte-1/0/10.32768  
Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2  
eth-switch

Physical interface: IC-WS001:bme0, Enabled, Physical link is Up



Type: Ethernet, Link-level type: Ethernet, MTU: 1500, Clocking: Unspecified,  
Speed: Unspecified  
Device flags : Present Running

Logical interface IC-WS001:bme0.0  
Flags: LinkAddress 0-0 Encapsulation: ENET2  
inet 128.0.32.0 --> 0/0

Logical interface IC-WS001:bme0.1  
Flags: LinkAddress 0-0 Encapsulation: ENET2  
inet 128.0.0.6/2  
128.0.130.2/2

Logical interface IC-WS001:bme0.2  
Flags: Encapsulation: ENET2  
inet 128.0.0.6/8  
128.0.130.2/8  
169.254.128.6/16  
169.254.193.1/16

Physical interface: IC-WS001:bme1, Enabled, Physical link is Up  
Type: Ethernet, Link-level type: Ethernet, MTU: 1514, Clocking: Unspecified,  
Speed: 1000mbps  
Device flags : Present Running  
Interface flags: SNMP-Traps

Logical interface IC-WS001:bme1.0  
Flags: Encapsulation: ENET2  
inet 128.0.0.1/2  
128.0.0.5/2  
128.0.0.16/2  
128.0.0.17/2  
128.0.0.24/2  
128.0.0.25/2  
128.0.0.26/2  
128.0.0.28/2  
128.0.0.29/2  
128.0.0.31/2  
tnp 0x5

Physical interface: IC-WS001:dcfabric, Enabled, Physical link is Up  
Type: Ethernet, Link-level type: Ethernet, MTU: 1572, Clocking: Unspecified,  
Speed: Unspecified  
Device flags : Present Running  
Interface flags: SNMP-Traps

Logical interface IC-WS001:dcfabric.0  
Flags: SNMP-Traps Encapsulation: ENET2  
inet  
mpls  
eth-switch

Physical interface: IC-WS001:pme0, Enabled, Physical link is Up  
Type: Ethernet, Link-level type: Ethernet, MTU: 1510, Clocking: Unspecified,  
Speed: 1000mbps  
Device flags : Present Running  
Interface flags: SNMP-Traps

Physical interface: IC-WS001:pme1, Enabled, Physical link is Up  
Type: Ethernet, Link-level type: Ethernet, MTU: 1510, Clocking: Unspecified,  
Speed: 1000mbps



```

Device flags   : Present Running
Interface flags: SNMP-Traps

Physical interface: IC-WS001:pme2, Enabled, Physical link is Down
Type: Ethernet, Link-level type: Ethernet, MTU: 1510, Clocking: Unspecified,
Speed: 1000mbps
Device flags   : Present Running
Interface flags: SNMP-Traps

Physical interface: IC-WS001:pme3, Enabled, Physical link is Down
Type: Ethernet, Link-level type: Ethernet, MTU: 1510, Clocking: Unspecified,
Speed: 1000mbps
Device flags   : Present Running
Interface flags: SNMP-Traps

Physical interface: IC-WS001:vcp0, Enabled, Physical link is Up
Type: Ethernet, Link-level type: 70, MTU: 1514, Clocking: Unspecified, Speed:
1000mbps
Device flags   : Present Running

Logical interface IC-WS001:vcp0.32769
Flags: LinkAddress 0-0 Encapsulation: ENET2

Physical interface: IC-WS001:vcp1, Enabled, Physical link is Up
Type: Ethernet, Link-level type: 70, MTU: 1492, Clocking: Unspecified, Speed:
1000mbps
Device flags   : Present Running

Logical interface IC-WS001:vcp1.32768
Flags: LinkAddress 0-0 Encapsulation: ENET2

Physical interface: IC-WS001:vcp2, Enabled, Physical link is Up
Type: Ethernet, Link-level type: 70, MTU: 1492, Clocking: Unspecified, Speed:
1000mbps
Device flags   : Present Running

Logical interface IC-WS001:vcp2.32768
Flags: LinkAddress 0-0 Encapsulation: ENET2

Physical interface: IC-WS001:vcp3, Enabled, Physical link is Down
Type: Ethernet, Link-level type: 70, MTU: 1492, Clocking: Unspecified, Speed:
1000mbps
Device flags   : Present Running

Logical interface IC-WS001:vcp3.32768
Flags: Device-Down LinkAddress 0-0 Encapsulation: ENET2

Physical interface: IC-WS001:vcp4, Enabled, Physical link is Down
Type: Ethernet, Link-level type: 70, MTU: 1492, Clocking: Unspecified, Speed:
1000mbps
Device flags   : Present Running

Logical interface IC-WS001:vcp4.32768
Flags: Device-Down LinkAddress 0-0 Encapsulation: ENET2

```

#### show interfaces statistics fabric detail

```

user@switch> show interfaces statistics fabric detail
show interfaces statistics fabric detail
Physical interface: IC-WS001:fte-0/0/0, Enabled, Physical link is Down
Interface index: 49174, SNMP ifIndex: 1208484473, Generation: 153
Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex, BPDU
Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:

```



```

Disabled, Flow control: Disabled
Device flags   : Present Running
Interface flags: SNMP-Traps Internal: 0x0
CoS queues    : 12 supported, 12 maximum usable queues
Hold-times    : Up 0 ms, Down 0 ms
Current address: 00:00:00:00:00:00, Hardware address: 00:00:00:00:00:00
Last flapped  : 2012-11-27 20:30:30 UTC (02:04:59 ago)
Statistics last cleared: Never
Traffic statistics:
Input bytes   :                0                0 bps
Output bytes  :                0                0 bps
Input packets :                0                0 pps
Output packets:                0                0 pps
IPv6 transit statistics:
Input bytes   :                0
Output bytes  :                0
Input packets :                0
Output packets:                0
Input errors:
Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0, L3
incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0, FIFO errors: 0,
Resource errors: 0
Output errors:
Carrier transitions: 0, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,
FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Egress queues: 12 supported, 5 in use
Queue counters:      Queued packets  Transmitted packets      Dropped packets

  0 fabric_fcset                0                0                0
  1 fabric_fcset                0                0                0
  2 fabric_fcset                0                0                0
  3 fabric_fcset                0                0                0
  4 fabric_fcset                0                0                0
  5 fabric_fcset                0                0                0
  6 fabric_fcset                0                0                0
  7 fabric_fcset                0                0                0
  8 fabric_fcset                0                0                0
  9 fabric_fcset                0                0                0
 10 fabric_fcset                0                0
0
 11 fabric_fcset                0                0
0

Logical interface IC-WS001:fte-0/0/0.32768 (Index 83) (SNMP ifIndex 1208484474)
(Generation 148)
Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2
Traffic statistics:
Input bytes   :                0
Output bytes  :                0
Input packets :                0
Output packets:                0

```



```

Local statistics:
  Input bytes :          0
  Output bytes :          0
  Input packets:          0
  Output packets:         0
Transit statistics:
  Input bytes :          0          0 bps
  Output bytes :          0          0 bps
  Input packets:          0          0 pps
  Output packets:         0          0 pps
Protocol eth-switch, MTU: 0, Generation: 176, Route table: 0

```

### show interfaces statistics fabric terse

```

user@switch> show interfaces statistics fabric terse
Interface      Admin Link Proto  Local      Remote
IC-WS001:fte-0/0/0      up   down
IC-WS001:fte-0/0/0.32768 up   down eth-switch
IC-WS001:fte-0/0/4      up   down
IC-WS001:fte-0/0/4.32768 up   down eth-switch
IC-WS001:fte-0/0/6      up   down
IC-WS001:fte-0/0/6.32768 up   down eth-switch
IC-WS001:fte-0/0/13     up   down
IC-WS001:fte-0/0/13.32768 up   down eth-switch
IC-WS001:fte-0/0/15     up   down
IC-WS001:fte-0/0/15.32768 up   down eth-switch
IC-WS001:fte-1/0/2      up   down
IC-WS001:fte-1/0/2.32768 up   down eth-switch
IC-WS001:fte-1/0/7      up   down
IC-WS001:fte-1/0/7.32768 up   down eth-switch
IC-WS001:fte-1/0/10     up   down
IC-WS001:fte-1/0/10.32768 up   down eth-switch
IC-WS001:bme0          up   up
IC-WS001:bme0.0        up   up   inet    128.0.32.0      --> 0/0
IC-WS001:bme0.1        up   up   inet    128.0.0.6/2
                                     128.0.130.2/2
IC-WS001:bme0.2        up   up   inet    128.0.0.6/8
                                     128.0.130.2/8
                                     169.254.128.6/16
                                     169.254.193.1/16
IC-WS001:bme1          up   up
IC-WS001:bme1.0        up   up   inet    128.0.0.1/2
                                     128.0.0.5/2
                                     128.0.0.16/2
                                     128.0.0.17/2
                                     128.0.0.24/2
                                     128.0.0.25/2
                                     128.0.0.26/2
                                     128.0.0.28/2
                                     128.0.0.29/2
                                     128.0.0.31/2
                                     tnp    0x5
IC-WS001:dcfabric      up   up
IC-WS001:dcfabric.0    up   up   inet
                                     mpls
                                     eth-switch
IC-WS001:pme0          up   up
IC-WS001:pme1          up   up
IC-WS001:pme2          up   down
IC-WS001:pme3          up   down
IC-WS001:vcp0          up   up
IC-WS001:vcp0.32769    up   up
IC-WS001:vcp1          up   up

```



IC-WS001:vcp1.32768	up	up
IC-WS001:vcp2	up	up
IC-WS001:vcp2.32768	up	up
IC-WS001:vcp3	up	down
IC-WS001:vcp3.32768	up	down
IC-WS001:vcp4	up	down
IC-WS001:vcp4.32768	up	down

**show interfaces**  
**statistics fabric**  
**device-name**

```
user@switch> show interfaces statistics fabric IC-WS001:fte-0/0/13
Physical interface: IC-WS001:fte-0/0/13, Enabled, Physical link is Down
  Interface index: 49177, SNMP ifIndex: 1208484479
  Link-level type: Ethernet, MTU: 9232, Speed: 40Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled, Flow control: Disabled
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x0
  CoS queues     : 12 supported, 12 maximum usable queues
  Current address: 00:00:00:00:00:0d, Hardware address: 00:00:00:00:00:0d
  Last flapped   : 2012-11-27 20:30:30 UTC (02:09:53 ago)
  Statistics last cleared: Never
  Input rate      : 0 bps (0 pps)
  Output rate     : 0 bps (0 pps)
  Input errors: 0, Output errors: 0

Logical interface IC-WS001:fte-0/0/13.32768 (Index 86) (SNMP ifIndex 1208484480)

  Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2
  Input packets : 0
  Output packets: 0
  Protocol eth-switch, MTU: 0
```



## show interfaces queue

<b>Syntax</b>	<pre>show interfaces queue &lt;aggregate   remaining-traffic&gt; &lt;both-ingress-egress&gt; &lt;egress&gt; &lt;forwarding-class forwarding-class&gt; &lt;ingress&gt; &lt;interface-name interface-name&gt; &lt;l2-statistics&gt; &lt;remaining-traffic&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p><b>both-ingress-egress</b>, <b>egress</b>, and <b>ingress</b> options introduced in Junos OS Release 7.6.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p> <p><b>l2-statistics</b> option introduced in Junos OS Release 12.1.</p>
<b>Description</b>	Display class-of-service (CoS) queue information for physical interfaces.
<b>Options</b>	<p><b>none</b>—Show detailed CoS queue statistics for all physical interfaces.</p> <p><b>aggregate</b>—(Optional) Display the aggregated queuing statistics of all logical interfaces that have traffic-control profiles configured. (Not on the QFX Series.)</p> <p><b>both-ingress-egress</b>—(Optional) On Gigabit Ethernet Intelligent Queuing 2 (IQ2) PICs, display both ingress and egress queue statistics. (Not on the QFX Series.)</p> <p><b>egress</b>—(Optional) Display egress queue statistics.</p> <p><b>forwarding-class forwarding-class</b>—(Optional) Forwarding class name for this queue. Shows detailed CoS statistics for the queue associated with the specified forwarding class.</p> <p><b>ingress</b>—(Optional) On Gigabit Ethernet IQ2 PICs, display ingress queue statistics. (Not on the QFX Series.)</p> <p><b>interface-name interface-name</b>—(Optional) Show detailed CoS queue statistics for the specified interface.</p> <p><b>l2-statistics</b>—(optional) Display layer 2 statistics for MLPPP, FRF.15, and FRF.16 bundles</p>

### Overhead for Layer 2 Statistics

Transmitted packets and transmitted byte counts are displayed for the layer 2 level with the addition of encapsulation overheads applied for fragmentation, as shown in [Table 170 on page 2206](#). Others counters, such as packets and bytes queued (input) and drop counters, are displayed at the layer 3 level. In the case of link fragmentation and interleaving (LFI) for which not fragmentation is applied, corresponding layer 2 overheads are added, as shown in [Table 170 on page 2206](#).



Table 170: Layer 2 Overhead, Transmitted Packets/Bytes

Protocol	Fragmentation		LFI
	First fragmentation	Second to n fragmentations	
	Bytes	Bytes	
MLPPP (Long)	13	12	8
MLPPP (short)	11	10	8
MLFR (FRF15)	12	10	8
MFR (FRF16)	10	8	-
MCMLPPP(Long)	13	12	-
MCMLPPP(Short)	11	10	-



## Layer 2 Statistics - Fragmentation Overhead Calculation

### MLPPP/MC-MLPPP Overhead details:

=====

#### Fragment 1:

Outer PPP header	: 4 bytes
Long or short sequence MLPPP header	: 4 bytes or 2 bytes
Inner PPP header	: 1 byte
HDLC flag and FCS bytes	: 4 bytes

#### Fragments 2 .. n :

Outer PPP header	: 4 bytes
Long or short sequence MLPPP header	: 4 bytes or 2 bytes
HDLC flag and FCS bytes	: 4 bytes

### MLFR (FRF15) Overhead details:

=====

#### Fragment 1:

Framereelay header	: 2 bytes
Control,NLPID	: 2 bytes
Fragmentaion header	: 2 bytes
Inner proto	: 2 bytes
HDLC flag and FCS	: 4 bytes

#### Fragments 2 ...n :

Framereelay header	: 2 bytes
Control,NLPID	: 2 bytes
Fragmentaion header	: 2 bytes
HDLC flag and FCS	: 4 bytes

### MFR (FRF16) Overhead details:

=====

#### Fragment 1:

Fragmentaion header	: 2 bytes
Framereelay header	: 2 bytes
Inner proto	: 2 bytes
HDLC flag and FCS	: 4 bytes

#### Fragments 2 ...n :

Fragmentaion header	: 2 bytes
Framereelay header	: 2 bytes
HDLC flag and FCS	: 4 bytes

## Overhead with LFI

### MLPPP(Long & short sequence):

=====

Outer PPP header	: 4 bytes
HDLC flag and FCS	: 4 bytes

### MLFR (FRF15):

=====

Framereelay header	: 2 bytes
Control,NLPID	: 2 bytes
HDLC flag and FCS	: 4 bytes

The following examples show overhead for different cases:



- A 1000-byte packet is sent to a mlppp bundle without any fragmentation. At the layer 2 level, bytes transmitted is 1013 in 1 packet. This overhead is for MLPPP long sequence encap.
- A 1000-byte packet is sent to a mlppp bundle with a fragment threshold of 250byte. At the layer 2 level, bytes transmitted is 1061 bytes in 5 packets.
- A 1000-byte LFI packet is sent to an mlppp bundle. At the layer 2 level, bytes transmitted is 1008 in 1 packet.

**remaining-traffic**—(Optional) Display the queuing statistics of all logical interfaces that do not have traffic-control profiles configured. (Not on the QFX Series.)

**Additional Information** On M Series routers (except for the M320 and M120 routers), this command is valid only for a PIC installed on an enhanced Flexible PIC Concentrator (FPC).

Queue statistics for aggregated interfaces are supported on the M Series and T Series routers only. Statistics for an aggregated interface are the summation of the queue statistics of the child links of that aggregated interface. You can view the statistics for a child interface by using the **show interfaces statistics** command for that child interface.

When you configure tricolor marking on a 10-port 1-Gigabit Ethernet PIC, for queues 6 and 7 only, the output does not display the number of queued bytes and packets, or the number of bytes and packets dropped because of RED. If you do not configure tricolor marking on the interface, these statistics are available for all queues.

For the 4-port Channelized OC12 IQE PIC and 1-port Channelized OC48 IQE PIC, the **Packet Forwarding Engine Chassis Queues** field represents traffic bound for a particular physical interface on the PIC. For all other PICs, the **Packet Forwarding Engine Chassis Queues** field represents the total traffic bound for the PIC.

For Gigabit Ethernet IQ2 PICs, the **show interfaces queue** command output does not display the number of tail-dropped packets. This limitation does not apply to Packet Forwarding Engine chassis queues.

When fragmentation occurs on the egress interface, the first set of packet counters shows the postfragmentation values. The second set of packet counters (under the **Packet Forwarding Engine Chassis Queues** field) shows the prefragmentation values.

The behavior of the **egress** queues for the **Routing Engine-Generated Traffic** is not same as the configured queue for MLPPP and MFR configurations.

For information about how to configure CoS, see the Junos® OS Network Interfaces. For related CoS operational mode commands, see the Junos OS Operational Mode Commands.

**Required Privilege Level** view

**List of Sample Output** [show interfaces queue \(Aggregated Ethernet on a T320 Router\) on page 2214](#)  
[show interfaces queue \(Fast Ethernet on a J4300 Router\) on page 2215](#)



[show interfaces queue \(Gigabit Ethernet on a T640 Router\) on page 2216](#)  
[show interfaces queue aggregate \(Gigabit Ethernet Enhanced DPC\) on page 2216](#)  
[show interfaces queue \(Gigabit Ethernet IQ2 PIC\) on page 2220](#)  
[show interfaces queue both-ingress-egress \(Gigabit Ethernet IQ2 PIC\) on page 2223](#)  
[show interfaces queue ingress \(Gigabit Ethernet IQ2 PIC\) on page 2226](#)  
[show interfaces queue egress \(Gigabit Ethernet IQ2 PIC\) on page 2226](#)  
[show interfaces queue remaining-traffic \(Gigabit Ethernet Enhanced DPC\) on page 2228](#)  
[show interfaces queue \(Channelized OC12 IQE Type 3 PIC in SONET Mode\) on page 2231](#)  
[show interfaces queue \(QFX Series\) on page 2241](#)  
[show interfaces queue l2-statistics \(lsq interface\) on page 2242](#)

**Output Fields** [Table 171 on page 2209](#) lists the output fields for the **show interfaces queue** command. Output fields are listed in the approximate order in which they appear.

**Table 171: show interfaces queue Output Fields**

Field Name	Field Description
<b>Physical interface</b>	Name of the physical interface.
<b>Enabled</b>	State of the interface. Possible values are described in the “Enabled Field” section under Common Output Fields Description.
<b>Interface index</b>	Physical interface's index number, which reflects its initialization sequence.
<b>SNMP ifIndex</b>	SNMP index number for the interface.
<b>Forwarding classes supported</b>	Total number of forwarding classes supported on the specified interface.
<b>Forwarding classes in use</b>	Total number of forwarding classes in use on the specified interface.
<b>Ingress queues supported</b>	On Gigabit Ethernet IQ2 PICs only, total number of ingress queues supported on the specified interface.
<b>Ingress queues in use</b>	On Gigabit Ethernet IQ2 PICs only, total number of ingress queues in use on the specified interface.
<b>Output queues supported</b>	Total number of output queues supported on the specified interface.
<b>Output queues in use</b>	Total number of output queues in use on the specified interface.
<b>Egress queues supported</b>	Total number of egress queues supported on the specified interface.
<b>Egress queues in use</b>	Total number of egress queues in use on the specified interface.
<b>Queue</b>	Queue number.



Table 171: show interfaces queue Output Fields (*continued*)

Field Name	Field Description
<b>Queue counters (Ingress)</b>	CoS queue number and its associated user-configured forwarding class name. Displayed on IQ2 interfaces. <ul style="list-style-type: none"> <li>• <b>Queued packets</b>—Number of queued packets.</li> <li>• <b>Transmitted packets</b>—Number of transmitted packets.</li> <li>• <b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>
<b>Burst size</b>	(Logical interfaces on IQ PICs only) Maximum number of bytes up to which the logical interface can burst. The burst size is based on the shaping rate applied to the interface.
<b>Forwarding classes</b>	Forwarding class name.
<b>Queued Packets</b>	Number of packets queued to this queue. <p><b>NOTE:</b> For Gigabit Ethernet IQ2 interfaces, the Queued Packets count is calculated by the Junos OS interpreting one frame buffer as one packet. If the queued packets are very large or very small, the calculation might not be completely accurate for transit traffic. The count is completely accurate for traffic terminated on the router.</p>
<b>Queued Bytes</b>	Number of bytes queued to this queue. The byte counts vary by PIC type. For more information, see <a href="#">Table 172 on page 2212</a> .
<b>Transmitted Packets</b>	Number of packets transmitted by this queue. When fragmentation occurs on the egress interface, the first set of packet counters shows the postfragmentation values. The second set of packet counters (displayed under the <b>Packet Forwarding Engine Chassis Queues</b> field) shows the prefragmentation values. <p><b>NOTE:</b> For layer 2 statistics, see “<a href="#">Overhead for Layer 2 Statistics</a>” on page 2205</p>
<b>Transmitted Bytes</b>	Number of bytes transmitted by this queue. The byte counts vary by PIC type. For more information, see <a href="#">Table 172 on page 2212</a> . <p><b>NOTE:</b> On MX Series routers, this number can be inaccurate when you issue the command for a physical interface repeatedly and in quick succession, because the statistics for the child nodes are collected infrequently. Wait ten seconds between successive iterations to avoid this situation.</p> <p><b>NOTE:</b> For layer 2 statistics, see “<a href="#">Overhead for Layer 2 Statistics</a>” on page 2205</p>
<b>Tail-dropped packets</b>	Number of packets dropped because of tail drop.



Table 171: show interfaces queue Output Fields (*continued*)

Field Name	Field Description
RED-dropped packets	<p>Number of packets dropped because of random early detection (RED).</p> <ul style="list-style-type: none"> <li>(M Series and T Series routers only) On M320 and M120 routers and the T Series routers, the total number of dropped packets is displayed. On all other M Series routers, the output classifies dropped packets into the following categories: <ul style="list-style-type: none"> <li><b>Low, non-TCP</b>—Number of low-loss priority non-TCP packets dropped because of RED.</li> <li><b>Low, TCP</b>—Number of low-loss priority TCP packets dropped because of RED.</li> <li><b>High, non-TCP</b>—Number of high-loss priority non-TCP packets dropped because of RED.</li> <li><b>High, TCP</b>—Number of high-loss priority TCP packets dropped because of RED.</li> </ul> </li> <li>(J Series routers and MX Series routers with enhanced DPCs, and T Series routers with enhanced FPCs only) The output classifies dropped packets into the following categories: <ul style="list-style-type: none"> <li><b>Low</b>—Number of low-loss priority packets dropped because of RED.</li> <li><b>Medium-low</b>—Number of medium-low loss priority packets dropped because of RED.</li> <li><b>Medium-high</b>—Number of medium-high loss priority packets dropped because of RED.</li> <li><b>High</b>—Number of high-loss priority packets dropped because of RED.</li> </ul> </li> </ul>
RED-dropped bytes	<p>Number of bytes dropped because of RED. The byte counts vary by PIC type. For more information, see <a href="#">Table 172 on page 2212</a>.</p> <ul style="list-style-type: none"> <li>(M Series and T Series routers only) On M320 and M120 routers and the T Series routers, only the total number of dropped bytes is displayed. On all other M Series routers, the output classifies dropped bytes into the following categories: <ul style="list-style-type: none"> <li><b>Low, non-TCP</b>—Number of low-loss priority non-TCP bytes dropped because of RED.</li> <li><b>Low, TCP</b>—Number of low-loss priority TCP bytes dropped because of RED.</li> <li><b>High, non-TCP</b>—Number of high-loss priority non-TCP bytes dropped because of RED.</li> <li><b>High, TCP</b>—Number of high-loss priority TCP bytes dropped because of RED.</li> </ul> </li> <li>(J Series routers only) The output classifies dropped bytes into the following categories: <ul style="list-style-type: none"> <li><b>Low</b>—Number of low-loss priority bytes dropped because of RED.</li> <li><b>Medium-low</b>—Number of medium-low loss priority bytes dropped because of RED.</li> <li><b>Medium-high</b>—Number of medium-high loss priority bytes dropped because of RED.</li> <li><b>High</b>—Number of high-loss priority bytes dropped because of RED.</li> </ul> </li> </ul>

Byte counts vary by PIC type. [Table 172 on page 2212](#) shows how the byte counts on the outbound interfaces vary depending on the PIC type. [Table 172 on page 2212](#) is based on the assumption that outbound interfaces are sending IP traffic with 478 bytes per packet.



Table 172: Byte Count by PIC Type

PIC Type	Output Level	Byte Count Includes	Comments
Gigabit Ethernet IQ and IQE PICs	Interface	<p>Queued: 490 bytes per packet, representing 478 bytes of Layer 3 packet + 12 bytes</p> <p>Transmitted: 490 bytes per packet, representing 478 bytes of Layer 3 packet + 12 bytes</p> <p>RED dropped: 496 bytes per packet representing 478 bytes of Layer 3 packet + 18 bytes</p>	<p>The 12 additional bytes include 6 bytes for the destination MAC address + 4 bytes for the VLAN + 2 bytes for the Ethernet type.</p> <p>For RED dropped, 6 bytes are added for the source MAC address.</p>
	Packet forwarding component	<p>Queued: 478 bytes per packet, representing 478 bytes of Layer 3 packet</p> <p>Transmitted: 478 bytes per packet, representing 478 bytes of Layer 3 packet</p>	—
Non-IQ PIC	Interface	<p>T Series, TX Series, T1600, and MX Series routers:</p> <ul style="list-style-type: none"> <li>Queued: 478 bytes of Layer 3 packet.</li> <li>Transmitted: 478 bytes of Layer 3 packet.</li> </ul> <p>T4000 routers with Type 5 FPCs :</p> <ul style="list-style-type: none"> <li>Queued: 478 bytes of Layer 3 packet + the full Layer 2 overhead including 4 bytes CRC + the full Layer 1 overhead 8 bytes preamble + 12 bytes Inter frame Gap.</li> <li>Transmitted: 478 bytes of Layer 3 packet + the full Layer 2 overhead including 4 bytes CRC + the full Layer 1 overhead 8 bytes preamble + 12 bytes Interframe Gap.</li> </ul> <p>M Series routers:</p> <ul style="list-style-type: none"> <li>Queued: 478 bytes of Layer 3 packet.</li> <li>Transmitted: 478 bytes of Layer 3 packet + the full Layer 2 overhead.</li> </ul> <p>PTX Series Packet Transport Switches:</p> <ul style="list-style-type: none"> <li>Queued: 478 bytes of Layer 3 packet + the full Layer 2 overhead including 4 bytes FCS + the full Layer 1 overhead of the MAC header DA + SA + EtherType (non-VLAN).</li> <li>Transmitted: 478 bytes of Layer 3 packet + the full Layer 2 overhead including 4 bytes CRC + the full Layer 1 overhead of the MAC header DA + SA + EtherType (non-VLAN).</li> <li>RED dropped: 478 bytes of Layer 3 packet + 22 bytes special header. To the TQ, this packet has 4 bytes more than queued or transmitted.</li> </ul>	<p>The Layer 2 overhead is 14 bytes for non-VLAN traffic and 18 bytes for VLAN traffic.</p>



Table 172: Byte Count by PIC Type (*continued*)

PIC Type	Output Level	Byte Count Includes	Comments
IQ and IQE PICs with a SONET/SDH interface	Interface	<p>Queued: 482 bytes per packet, representing 478 bytes of Layer 3 packet + 4 bytes</p> <p>Transmitted: 482 bytes per packet, representing 478 bytes of Layer 3 packet + 4 bytes</p> <p>RED dropped: 482 bytes per packet, representing 478 bytes of Layer 3 packet + 4 bytes</p>	The additional 4 bytes are for the Layer 2 Point-to-Point Protocol (PPP) header.
	Packet forwarding component	<p>Queued: 478 bytes per packet, representing 478 bytes of Layer 3 packet</p> <p>Transmitted: 486 bytes per packet, representing 478 bytes of Layer 3 packet + 8 bytes</p>	For transmitted packets, the additional 8 bytes includes 4 bytes for the PPP header and 4 bytes for a cookie.
Non-IQ PIC with a SONET/SDH interface	Interface	<p>T Series, TX Series, T1600, and MX Series routers:</p> <ul style="list-style-type: none"> <li>Queued: 478 bytes of Layer 3 packet.</li> <li>Transmitted: 478 bytes of Layer 3 packet.</li> </ul> <p>M Series routers:</p> <ul style="list-style-type: none"> <li>Queued: 478 bytes of Layer 3 packet.</li> <li>Transmitted: 483 bytes per packet, representing 478 bytes of Layer 3 packet + 5 bytes</li> <li>RED dropped: 478 bytes per packet, representing 478 bytes of Layer 3 packet</li> </ul>	For transmitted packets, the additional 5 bytes includes 4 bytes for the PPP header and 1 byte for the packet loss priority (PLP).
Interfaces configured with Frame Relay Encapsulation	Interface	The default Frame Relay overhead is 7 bytes. If you configure the Frame Check Sequence (FCS) to 4 bytes, then the overhead increases to 10 bytes.	
1-port 10-Gigabit Ethernet IQ2 and IQ2-E PICs	Interface	<p>Queued: 478 bytes of Layer 3 packet + the full Layer 2 overhead including CRC.</p> <p>Transmitted: 478 bytes of Layer 3 packet + the full Layer 2 overhead including CRC.</p>	The Layer 2 overhead is 18 bytes for non-VLAN traffic and 22 bytes for VLAN traffic.
4-port 1G IQ2 and IQ2-E PICs	Packet forwarding component	Queued: 478 bytes of Layer 3 packet.	—
8-port 1G IQ2 and IQ2-E PICs		Transmitted: 478 bytes of Layer 3 packet.	



## Sample Output

### show interfaces queue (Aggregated Ethernet on a T320 Router)

The following example shows that the aggregated Ethernet interface, **ae1**, has traffic on queues **af1** and **af12**:

```

user@host> show interfaces queue ae1
Physical interface: ae1, Enabled, Physical link is Up
Interface index: 158, SNMP ifIndex: 33 Forwarding classes: 8 supported, 8 in use
Output queues: 8 supported, 8 in use
Queue: 0, Forwarding classes: be
  Queued:
    Packets      :          5          0 pps
    Bytes        :        242          0 bps
  Transmitted:
    Packets      :          5          0 pps
    Bytes        :        242          0 bps
    Tail-dropped packets :          0          0 pps
    RED-dropped packets :          0          0 pps
    RED-dropped bytes  :          0          0 bps
Queue: 1, Forwarding classes: af1
  Queued:
    Packets      :    42603765    595484 pps
    Bytes        :   5453281920   609776496 bps
  Transmitted:
    Packets      :    42603765    595484 pps
    Bytes        :   5453281920   609776496 bps
    Tail-dropped packets :          0          0 pps
    RED-dropped packets :          0          0 pps
    RED-dropped bytes  :          0          0 bps
Queue: 2, Forwarding classes: ef1
  Queued:
    Packets      :          0          0 pps
    Bytes        :          0          0 bps
  Transmitted:
    Packets      :          0          0 pps
    Bytes        :          0          0 bps
    Tail-dropped packets :          0          0 pps
    RED-dropped packets :          0          0 pps
    RED-dropped bytes  :          0          0 bps
Queue: 3, Forwarding classes: nc
  Queued:
    Packets      :          45          0 pps
    Bytes        :        3930          0 bps
  Transmitted:
    Packets      :          45          0 pps
    Bytes        :        3930          0 bps
    Tail-dropped packets :          0          0 pps
    RED-dropped packets :          0          0 pps
    RED-dropped bytes  :          0          0 bps
Queue: 4, Forwarding classes: af11
  Queued:
    Packets      :          0          0 pps
    Bytes        :          0          0 bps
  Transmitted:
    Packets      :          0          0 pps
    Bytes        :          0          0 bps
    Tail-dropped packets :          0          0 pps
    RED-dropped packets :          0          0 pps
    RED-dropped bytes  :          0          0 bps
Queue: 5, Forwarding classes: ef11

```



```

Queued:
  Packets      :      0      0 pps
  Bytes       :      0      0 bps
Transmitted:
  Packets      :      0      0 pps
  Bytes       :      0      0 bps
  Tail-dropped packets :      0      0 pps
  RED-dropped packets :      0      0 pps
  RED-dropped bytes  :      0      0 bps
Queue: 6, Forwarding classes: af12
Queued:
  Packets      :      31296413      437436 pps
  Bytes       :      4005940864      447935200 bps
Transmitted:
  Packets      :      31296413      437436 pps
  Bytes       :      4005940864      447935200 bps
  Tail-dropped packets :      0      0 pps
  RED-dropped packets :      0      0 pps
  RED-dropped bytes  :      0      0 bps
Queue: 7, Forwarding classes: nc2
Queued:
  Packets      :      0      0 pps
  Bytes       :      0      0 bps
Transmitted:
  Packets      :      0      0 pps
  Bytes       :      0      0 bps
  Tail-dropped packets :      0      0 pps
  RED-dropped packets :      0      0 pps
  RED-dropped bytes  :      0      0 bps

```

#### show interfaces queue (Fast Ethernet on a J4300 Router)

```

user@host> show interfaces queue fe-4/0/0.0
Logical interface fe-4/0/0.0 (Index 71) (SNMP ifIndex 42)
Forwarding classes: 8 supported, 8 in use
Output queues: 8 supported, 8 in use
Queue: 0, Forwarding classes: be
Queued:
  Packets      :      5240762      3404 pps
  Bytes       :      3020710354      15934544 bps
Transmitted:
  Packets      :      5240762      3404 pps
  Bytes       :      3020710354      15934544 bps
  Tail-dropped packets :      0      0 pps
  RED-dropped packets :      0      0 pps
  Low         :      0      0 pps
  Medium-low  :      0      0 pps
  Medium-high :      0      0 pps
  High        :      0      0 pps
  RED-dropped bytes  :      0      0 bps
  Low         :      0      0 pps
  Medium-low  :      0      0 pps
  Medium-high :      0      0 pps
  High        :      0      0 pps
Queue: 1, Forwarding classes: af1
Queued:
  Packets      :      2480391      1650 pps
  Bytes       :      1304685666      6945704 bps
Transmitted:
  Packets      :      2478740      1650 pps
  Bytes       :      1303817240      6945704 bps
  Tail-dropped packets :      0      0 pps
  RED-dropped packets :      1651      0 pps

```



Low	:	0	0 pps
Medium-low	:	0	0 pps
Medium-high	:	0	0 pps
High	:	1651	0 pps
RED-dropped bytes	:	868426	0 bps
Low	:	0	0 pps
Medium-low	:	0	0 pps
Medium-high	:	0	0 pps
High	:	868426	0 pps

### show interfaces queue (Gigabit Ethernet on a T640 Router)

```

user@host> show interfaces queue
Physical interface: ge-7/0/1, Enabled, Physical link is Up
Interface index: 150, SNMP ifIndex: 42
Forwarding classes: 8 supported, 8 in use
Output queues: 8 supported, 8 in use
Queue: 0, Forwarding classes: be
  Queued:
    Packets      :      13      0 pps
    Bytes        :     622      0 bps
  Transmitted:
    Packets      :      13      0 pps
    Bytes        :     622      0 bps
    Tail-dropped packets :      0      0 pps
    RED-dropped packets :      0      0 pps
    RED-dropped bytes  :      0      0 bps
Queue: 1, Forwarding classes: af1
  Queued:
    Packets      : 1725947945 372178 pps
    Bytes        : 220921336960 381110432 bps
  Transmitted:
    Packets      : 1725947945 372178 pps
    Bytes        : 220921336960 381110432 bps
    Tail-dropped packets :      0      0 pps
    RED-dropped packets :      0      0 pps
    RED-dropped bytes  :      0      0 bps
Queue: 2, Forwarding classes: ef1
  Queued:
    Packets      :      0      0 pps
    Bytes        :      0      0 bps
  Transmitted:
    Packets      :      0      0 pps
    Bytes        :      0      0 bps
    Tail-dropped packets :      0      0 pps
    RED-dropped packets :      0      0 pps
    RED-dropped bytes  :      0      0 bps
Queue: 3, Forwarding classes: nc
  Queued:
    Packets      :      571      0 pps
    Bytes        :     49318     336 bps
  Transmitted:
    Packets      :      571      0 pps
    Bytes        :     49318     336 bps
    Tail-dropped packets :      0      0 pps
    RED-dropped packets :      0      0 pps
    RED-dropped bytes  :      0      0 bps

```

### show interfaces queue aggregate (Gigabit)

```

user@host> show interfaces queue ge-2/2/9 aggregate
Physical interface: ge-2/2/9, Enabled, Physical link is Up
Interface index: 238, SNMP ifIndex: 71

```



Ethernet Enhanced  
DPC)

```

Forwarding classes: 16 supported, 4 in use
Ingress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
    Packets      :          148450735          947295 pps
    Bytes        :          8016344944        409228848 bps
  Transmitted:
    Packets      :          76397439          487512 pps
    Bytes        :          4125461868        210602376 bps
  Tail-dropped packets : Not Available
  RED-dropped packets :          72053285          459783 pps
    Low          :          72053285          459783 pps
    Medium-low   :              0              0 pps
    Medium-high  :              0              0 pps
    High         :              0              0 pps
  RED-dropped bytes  :          3890877444        198626472 bps
    Low          :          3890877444        198626472 bps
    Medium-low   :              0              0 bps
    Medium-high  :              0              0 bps
    High         :              0              0 bps
Queue: 1, Forwarding classes: expedited-forwarding
  Queued:
    Packets      :              0              0 pps
    Bytes        :              0              0 bps
  Transmitted:
    Packets      :              0              0 pps
    Bytes        :              0              0 bps
  Tail-dropped packets : Not Available
  RED-dropped packets :              0              0 pps
    Low          :              0              0 pps
    Medium-low   :              0              0 pps
    Medium-high  :              0              0 pps
    High         :              0              0 pps
  RED-dropped bytes  :              0              0 bps
    Low          :              0              0 bps
    Medium-low   :              0              0 bps
    Medium-high  :              0              0 bps
    High         :              0              0 bps
Queue: 2, Forwarding classes: assured-forwarding
  Queued:
    Packets      :          410278257          473940 pps
    Bytes        :          22156199518        204742296 bps
  Transmitted:
    Packets      :          4850003           4033 pps
    Bytes        :          261900162        1742256 bps
  Tail-dropped packets : Not Available
  RED-dropped packets :          405425693          469907 pps
    Low          :          405425693          469907 pps
    Medium-low   :              0              0 pps
    Medium-high  :              0              0 pps
    High         :              0              0 pps
  RED-dropped bytes  :          21892988124        203000040 bps
    Low          :          21892988124        203000040 bps
    Medium-low   :              0              0 bps
    Medium-high  :              0              0 bps
    High         :              0              0 bps
Queue: 3, Forwarding classes: network-control
  Queued:
    Packets      :              0              0 pps
    Bytes        :              0              0 bps
  Transmitted:

```



```

Packets          :                0                0 pps
Bytes            :                0                0 bps
Tail-dropped packets : Not Available
RED-dropped packets :                0                0 pps
  Low            :                0                0 pps
  Medium-low     :                0                0 pps
  Medium-high    :                0                0 pps
  High           :                0                0 pps
RED-dropped bytes  :                0                0 bps
  Low            :                0                0 bps
  Medium-low     :                0                0 bps
  Medium-high    :                0                0 bps
  High           :                0                0 bps
Forwarding classes: 16 supported, 4 in use
Egress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
    Packets      :                76605230            485376 pps
    Bytes        :                5209211400          264044560 bps
  Transmitted:
    Packets      :                76444631            484336 pps
    Bytes        :                5198235612          263478800 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                160475            1040 pps
      Low        :                160475            1040 pps
      Medium-low :                0                0 pps
      Medium-high:                0                0 pps
      High       :                0                0 pps
    RED-dropped bytes  :                10912300          565760 bps
      Low          :                10912300          565760 bps
      Medium-low   :                0                0 bps
      Medium-high  :                0                0 bps
      High        :                0                0 bps
Queue: 1, Forwarding classes: expedited-forwarding
  Queued:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0                0 pps
      Low        :                0                0 pps
      Medium-low :                0                0 pps
      Medium-high:                0                0 pps
      High       :                0                0 pps
    RED-dropped bytes  :                0                0 bps
      Low          :                0                0 bps
      Medium-low   :                0                0 bps
      Medium-high  :                0                0 bps
      High        :                0                0 bps
Queue: 2, Forwarding classes: assured-forwarding
  Queued:
    Packets      :                4836136            3912 pps
    Bytes        :                333402032          2139056 bps
  Transmitted:
    Packets      :                3600866            1459 pps
    Bytes        :                244858888          793696 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                1225034            2450 pps
      Low        :                1225034            2450 pps

```



```

Medium-low      : 0 0 pps
Medium-high     : 0 0 pps
High            : 0 0 pps
RED-dropped bytes : 83302312 1333072 bps
Low             : 83302312 1333072 bps
Medium-low      : 0 0 bps
Medium-high     : 0 0 bps
High            : 0 0 bps
Queue: 3, Forwarding classes: network-control
Queued:
Packets         : 0 0 pps
Bytes           : 0 0 bps
Transmitted:
Packets         : 0 0 pps
Bytes           : 0 0 bps
Tail-dropped packets : Not Available
RED-dropped packets : 0 0 pps
Low             : 0 0 pps
Medium-low      : 0 0 pps
Medium-high     : 0 0 pps
High            : 0 0 pps
RED-dropped bytes : 0 0 bps
Low             : 0 0 bps
Medium-low      : 0 0 bps
Medium-high     : 0 0 bps
High            : 0 0 bps

```

#### Packet Forwarding Engine Chassis Queues:

Queues: 4 supported, 4 in use

Queue: 0, Forwarding classes: best-effort

```

Queued:
Packets         : 77059796 486384 pps
Bytes           : 3544750624 178989576 bps
Transmitted:
Packets         : 77059797 486381 pps
Bytes           : 3544750670 178988248 bps
Tail-dropped packets : 0 0 pps
RED-dropped packets : 0 0 pps
Low             : 0 0 pps
Medium-low      : 0 0 pps
Medium-high     : 0 0 pps
High            : 0 0 pps
RED-dropped bytes : 0 0 bps
Low             : 0 0 bps
Medium-low      : 0 0 bps
Medium-high     : 0 0 bps
High            : 0 0 bps

```

Queue: 1, Forwarding classes: expedited-forwarding

```

Queued:
Packets         : 0 0 pps
Bytes           : 0 0 bps
Transmitted:
Packets         : 0 0 pps
Bytes           : 0 0 bps
Tail-dropped packets : 0 0 pps
RED-dropped packets : 0 0 pps
Low             : 0 0 pps
Medium-low      : 0 0 pps
Medium-high     : 0 0 pps
High            : 0 0 pps
RED-dropped bytes : 0 0 bps

```



```

        Low                :                0                0 bps
        Medium-low         :                0                0 bps
        Medium-high        :                0                0 bps
        High               :                0                0 bps
Queue: 2, Forwarding classes: assured-forwarding
Queued:
  Packets                 :            4846580                3934 pps
  Bytes                   :            222942680            1447768 bps
Transmitted:
  Packets                 :            4846580                3934 pps
  Bytes                   :            222942680            1447768 bps
  Tail-dropped packets :                0                0 pps
  RED-dropped packets   :                0                0 pps
    Low                 :                0                0 pps
    Medium-low          :                0                0 pps
    Medium-high         :                0                0 pps
    High                :                0                0 pps
  RED-dropped bytes     :                0                0 bps
    Low                 :                0                0 bps
    Medium-low          :                0                0 bps
    Medium-high         :                0                0 bps
    High                :                0                0 bps
Queue: 3, Forwarding classes: network-control
Queued:
  Packets                 :                0                0 pps
  Bytes                   :                0                0 bps
Transmitted:
  Packets                 :                0                0 pps
  Bytes                   :                0                0 bps
  Tail-dropped packets :                0                0 pps
  RED-dropped packets   :                0                0 pps
    Low                 :                0                0 pps
    Medium-low          :                0                0 pps
    Medium-high         :                0                0 pps
    High                :                0                0 pps
  RED-dropped bytes     :                0                0 bps
    Low                 :                0                0 bps
    Medium-low          :                0                0 bps
    Medium-high         :                0                0 bps
    High                :                0                0 bps

```

### show interfaces queue (Gigabit Ethernet IQ2 PIC)

```

user@host> show interfaces queue ge-7/1/3
Physical interface: ge-7/1/3, Enabled, Physical link is Up
Interface index: 170, SNMP ifIndex: 70 Forwarding classes: 16 supported, 4 in
use Ingress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
Queued:
  Packets                 :            418390039                10 pps
  Bytes                   :            38910269752            7440 bps
Transmitted:
  Packets                 :            418390039                10 pps
  Bytes                   :            38910269752            7440 bps
  Tail-dropped packets : Not Available
  RED-dropped packets   :                0                0 pps
  RED-dropped bytes     :                0                0 bps
Queue: 1, Forwarding classes: expedited-forwarding
Queued:
  Packets                 :                0                0 pps
  Bytes                   :                0                0 bps
Transmitted:
  Packets                 :                0                0 pps

```



```

Bytes : 0 0 bps
Tail-dropped packets : Not Available
RED-dropped packets : 0 0 pps
RED-dropped bytes : 0 0 bps
Queue: 2, Forwarding classes: assured-forwarding
Queued:
Packets : 0 0 pps
Bytes : 0 0 bps
Transmitted:
Packets : 0 0 pps
Bytes : 0 0 bps
Tail-dropped packets : Not Available
RED-dropped packets : 0 0 pps
RED-dropped bytes : 0 0 bps
Queue: 3, Forwarding classes: network-control
Queued:
Packets : 7055 1 pps
Bytes : 451552 512 bps
Transmitted:
Packets : 7055 1 pps
Bytes : 451552 512 bps
Tail-dropped packets : Not Available
RED-dropped packets : 0 0 pps
RED-dropped bytes : 0 0 bps
Forwarding classes: 16 supported, 4 in use Egress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
Queued:
Packets : 1031 0 pps
Bytes : 143292 0 bps
Transmitted:
Packets : 1031 0 pps
Bytes : 143292 0 bps
Tail-dropped packets : Not Available
RL-dropped packets : 0 0 pps
RL-dropped bytes : 0 0 bps
RED-dropped packets : 0 0 pps
RED-dropped bytes : 0 0 bps
Queue: 1, Forwarding classes: expedited-forwarding
Queued:
Packets : 0 0 pps
Bytes : 0 0 bps
Transmitted:
Packets : 0 0 pps
Bytes : 0 0 bps
Tail-dropped packets : Not Available
RL-dropped packets : 0 0 pps
RL-dropped bytes : 0 0 bps
RED-dropped packets : 0 0 pps
RED-dropped bytes : 0 0 bps
Queue: 2, Forwarding classes: assured-forwarding
Queued:
Packets : 0 0 pps
Bytes : 0 0 bps
Transmitted:
Packets : 0 0 pps
Bytes : 0 0 bps
Tail-dropped packets : Not Available
RL-dropped packets : 0 0 pps
RL-dropped bytes : 0 0 bps
RED-dropped packets : 0 0 pps
RED-dropped bytes : 0 0 bps

```



## Queue: 3, Forwarding classes: network-control

## Queued:

Packets	:	77009	11 pps
Bytes	:	6894286	7888 bps

## Transmitted:

Packets	:	77009	11 pps
Bytes	:	6894286	7888 bps

Tail-dropped packets : Not Available

RL-dropped packets	:	0	0 pps
RL-dropped bytes	:	0	0 bps
RED-dropped packets	:	0	0 pps
RED-dropped bytes	:	0	0 bps

## Packet Forwarding Engine Chassis Queues:

Queues: 4 supported, 4 in use

## Queue: 0, Forwarding classes: best-effort

## Queued:

Packets	:	1031	0 pps
Bytes	:	147328	0 bps

## Transmitted:

Packets	:	1031	0 pps
Bytes	:	147328	0 bps

Tail-dropped packets : 0 0 pps

RED-dropped packets : 0 0 pps

Low, non-TCP : 0 0 pps

Low, TCP : 0 0 pps

High, non-TCP : 0 0 pps

High, TCP : 0 0 pps

RED-dropped bytes : 0 0 bps

Low, non-TCP : 0 0 bps

Low, TCP : 0 0 bps

High, non-TCP : 0 0 bps

High, TCP : 0 0 bps

## Queue: 1, Forwarding classes: expedited-forwarding

## Queued:

Packets	:	0	0 pps
Bytes	:	0	0 bps

## Transmitted:

Packets	:	0	0 pps
Bytes	:	0	0 bps

Tail-dropped packets : 0 0 pps

RED-dropped packets : 0 0 pps

Low, non-TCP : 0 0 pps

Low, TCP : 0 0 pps

High, non-TCP : 0 0 pps

High, TCP : 0 0 pps

RED-dropped bytes : 0 0 bps

Low, non-TCP : 0 0 bps

Low, TCP : 0 0 bps

High, non-TCP : 0 0 bps

High, TCP : 0 0 bps

## Queue: 2, Forwarding classes: assured-forwarding

## Queued:

Packets	:	0	0 pps
Bytes	:	0	0 bps

## Transmitted:

Packets	:	0	0 pps
Bytes	:	0	0 bps

Tail-dropped packets : 0 0 pps

RED-dropped packets : 0 0 pps

Low, non-TCP : 0 0 pps



```

Low, TCP : 0 0 pps
High, non-TCP : 0 0 pps
High, TCP : 0 0 pps
RED-dropped bytes : 0 0 bps
Low, non-TCP : 0 0 bps
Low, TCP : 0 0 bps
High, non-TCP : 0 0 bps
High, TCP : 0 0 bps
Queue: 3, Forwarding classes: network-control
Queued:
Packets : 94386 12 pps
Bytes : 13756799 9568 bps
Transmitted:
Packets : 94386 12 pps
Bytes : 13756799 9568 bps
Tail-dropped packets : 0 0 pps
RED-dropped packets : 0 0 pps
Low, non-TCP : 0 0 pps
Low, TCP : 0 0 pps
High, non-TCP : 0 0 pps
High, TCP : 0 0 pps
RED-dropped bytes : 0 0 bps
Low, non-TCP : 0 0 bps
Low, TCP : 0 0 bps
High, non-TCP : 0 0 bps
High, TCP : 0 0 bps

```

**show interfaces queue  
both-ingress-egress**

```

user@host> show interfaces queue ge-6/2/0 both-ingress-egress
Physical interface: ge-6/2/0, Enabled, Physical link is Up
Interface index: 175, SNMP ifIndex: 121

```



**(Gigabit Ethernet IQ2 PIC)**

```

Forwarding classes: 8 supported, 4 in use
Ingress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                254                0 pps
    Bytes        :            16274                0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0                0 pps
    RED-dropped bytes  :                0                0 bps
Queue: 1, Forwarding classes: expedited-forwarding
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0                0 pps
    RED-dropped bytes  :                0                0 bps
Queue: 2, Forwarding classes: assured-forwarding
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0                0 pps
    RED-dropped bytes  :                0                0 bps
Queue: 3, Forwarding classes: network-control
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0                0 pps
    RED-dropped bytes  :                0                0 bps
Forwarding classes: 8 supported, 4 in use
Egress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                3                0 pps
    Bytes        :            126                0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0                0 pps
    RED-dropped bytes  :                0                0 bps
Queue: 1, Forwarding classes: expedited-forwarding
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps

```



```

Tail-dropped packets : Not Available
RED-dropped packets  : 0 0 pps
RED-dropped bytes    : 0 0 bps
Queue: 2, Forwarding classes: assured-forwarding
Queued:
  Packets      : Not Available
  Bytes        : 0 0 bps
Transmitted:
  Packets      : 0 0 pps
  Bytes        : 0 0 bps
Tail-dropped packets : Not Available
RED-dropped packets  : 0 0 pps
RED-dropped bytes    : 0 0 bps
Queue: 3, Forwarding classes: network-control
Queued:
  Packets      : Not Available
  Bytes        : 0 0 bps
Transmitted:
  Packets      : 0 0 pps
  Bytes        : 0 0 bps
Tail-dropped packets : Not Available
RED-dropped packets  : 0 0 pps
RED-dropped bytes    : 0 0 bps
Packet Forwarding Engine Chassis Queues:
Queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
Queued:
  Packets      : 80564692 0 pps
  Bytes        : 3383717100 0 bps
Transmitted:
  Packets      : 80564692 0 pps
  Bytes        : 3383717100 0 bps
Tail-dropped packets : 0 0 pps
RED-dropped packets  : 0 0 pps
RED-dropped bytes    : 0 0 bps
Queue: 1, Forwarding classes: expedited-forwarding
Queued:
  Packets      : 80564685 0 pps
  Bytes        : 3383716770 0 bps
Transmitted:
  Packets      : 80564685 0 pps
  Bytes        : 3383716770 0 bps
Tail-dropped packets : 0 0 pps
RED-dropped packets  : 0 0 pps
RED-dropped bytes    : 0 0 bps
Queue: 2, Forwarding classes: assured-forwarding
Queued:
  Packets      : 0 0 pps
  Bytes        : 0 0 bps
Transmitted:
  Packets      : 0 0 pps
  Bytes        : 0 0 bps
Tail-dropped packets : 0 0 pps
RED-dropped packets  : 0 0 pps
RED-dropped bytes    : 0 0 bps
Queue: 3, Forwarding classes: network-control
Queued:
  Packets      : 9397 0 pps
  Bytes        : 3809052 232 bps
Transmitted:
  Packets      : 9397 0 pps

```



Bytes	:	3809052	232 bps
Tail-dropped packets	:	0	0 pps
RED-dropped packets	:	0	0 pps
RED-dropped bytes	:	0	0 bps

#### show interfaces queue ingress (Gigabit Ethernet IQ2 PIC)

```

user@host> show interfaces queue ge-6/2/0 ingress
Physical interface: ge-6/2/0, Enabled, Physical link is Up
  Interface index: 175, SNMP ifIndex: 121
  Forwarding classes: 8 supported, 4 in use
  Ingress queues: 4 supported, 4 in use
  Queue: 0, Forwarding classes: best-effort
    Queued:
      Packets      : Not Available
      Bytes        :                0                0 bps
    Transmitted:
      Packets      :                288                0 pps
      Bytes        :            18450                0 bps
      Tail-dropped packets : Not Available
      RED-dropped packets :                0                0 pps
      RED-dropped bytes  :                0                0 bps
  Queue: 1, Forwarding classes: expedited-forwarding
    Queued:
      Packets      : Not Available
      Bytes        :                0                0 bps
    Transmitted:
      Packets      :                0                0 pps
      Bytes        :                0                0 bps
      Tail-dropped packets : Not Available
      RED-dropped packets :                0                0 pps
      RED-dropped bytes  :                0                0 bps
  Queue: 2, Forwarding classes: assured-forwarding
    Queued:
      Packets      : Not Available
      Bytes        :                0                0 bps
    Transmitted:
      Packets      :                0                0 pps
      Bytes        :                0                0 bps
      Tail-dropped packets : Not Available
      RED-dropped packets :                0                0 pps
      RED-dropped bytes  :                0                0 bps
  Queue: 3, Forwarding classes: network-control
    Queued:
      Packets      : Not Available
      Bytes        :                0                0 bps
    Transmitted:
      Packets      :                0                0 pps
      Bytes        :                0                0 bps
      Tail-dropped packets : Not Available
      RED-dropped packets :                0                0 pps
      RED-dropped bytes  :                0                0 bps

```

#### show interfaces queue egress

```

user@host> show interfaces queue ge-6/2/0 egress
Physical interface: ge-6/2/0, Enabled, Physical link is Up
  Interface index: 175, SNMP ifIndex: 121

```



(Gigabit Ethernet IQ2  
PIC)

```

Forwarding classes: 8 supported, 4 in use
Egress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                3                0 pps
    Bytes        :               126                0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0                0 pps
    RED-dropped bytes  :                0                0 bps
Queue: 1, Forwarding classes: expedited-forwarding
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0                0 pps
    RED-dropped bytes  :                0                0 bps
Queue: 2, Forwarding classes: assured-forwarding
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0                0 pps
    RED-dropped bytes  :                0                0 bps
Queue: 3, Forwarding classes: network-control
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0                0 pps
    RED-dropped bytes  :                0                0 bps
Packet Forwarding Engine Chassis Queues:
Queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
    Packets      :                80564692            0 pps
    Bytes        :               3383717100            0 bps
  Transmitted:
    Packets      :                80564692            0 pps
    Bytes        :               3383717100            0 bps
    Tail-dropped packets :                0            0 pps
    RED-dropped packets :                0            0 pps
    RED-dropped bytes  :                0            0 bps
Queue: 1, Forwarding classes: expedited-forwarding
  Queued:
    Packets      :                80564685            0 pps
    Bytes        :               3383716770            0 bps
  Transmitted:
    Packets      :                80564685            0 pps
    Bytes        :               3383716770            0 bps

```



```
Tail-dropped packets :          0          0 pps
RED-dropped packets  :          0          0 pps
RED-dropped bytes   :          0          0 bps
Queue: 2, Forwarding classes: assured-forwarding
Queued:
  Packets           :          0          0 pps
  Bytes            :          0          0 bps
Transmitted:
  Packets           :          0          0 pps
  Bytes            :          0          0 bps
  Tail-dropped packets :          0          0 pps
  RED-dropped packets :          0          0 pps
  RED-dropped bytes  :          0          0 bps
Queue: 3, Forwarding classes: network-control
Queued:
  Packets           :          9538          0 pps
  Bytes            :        3819840          0 bps
Transmitted:
  Packets           :          9538          0 pps
  Bytes            :        3819840          0 bps
  Tail-dropped packets :          0          0 pps
  RED-dropped packets :          0          0 pps
  RED-dropped bytes  :          0          0 bps
```

**show interfaces queue  
remaining-traffic**

```
user@host> show interfaces queue ge-2/2/9 remaining-traffic
Physical interface: ge-2/2/9, Enabled, Physical link is Up
Interface index: 238, SNMP ifIndex: 71
```



(Gigabit Ethernet  
Enhanced DPC)

```

Forwarding classes: 16 supported, 4 in use
Ingress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
    Packets      :      110208969      472875 pps
    Bytes        :      5951284434    204282000 bps
  Transmitted:
    Packets      :      110208969      472875 pps
    Bytes        :      5951284434    204282000 bps
  Tail-dropped packets : Not Available
  RED-dropped packets :
    Low          :      0      0 pps
    Medium-low   :      0      0 pps
    Medium-high  :      0      0 pps
    High         :      0      0 pps
  RED-dropped bytes :
    Low          :      0      0 bps
    Medium-low   :      0      0 bps
    Medium-high  :      0      0 bps
    High         :      0      0 bps
Queue: 1, Forwarding classes: expedited-forwarding
  Queued:
    Packets      :      0      0 pps
    Bytes        :      0      0 bps
  Transmitted:
    Packets      :      0      0 pps
    Bytes        :      0      0 bps
  Tail-dropped packets : Not Available
  RED-dropped packets :
    Low          :      0      0 pps
    Medium-low   :      0      0 pps
    Medium-high  :      0      0 pps
    High         :      0      0 pps
  RED-dropped bytes :
    Low          :      0      0 bps
    Medium-low   :      0      0 bps
    Medium-high  :      0      0 bps
    High         :      0      0 bps
Queue: 2, Forwarding classes: assured-forwarding
  Queued:
    Packets      :      0      0 pps
    Bytes        :      0      0 bps
  Transmitted:
    Packets      :      0      0 pps
    Bytes        :      0      0 bps
  Tail-dropped packets : Not Available
  RED-dropped packets :
    Low          :      0      0 pps
    Medium-low   :      0      0 pps
    Medium-high  :      0      0 pps
    High         :      0      0 pps
  RED-dropped bytes :
    Low          :      0      0 bps
    Medium-low   :      0      0 bps
    Medium-high  :      0      0 bps
    High         :      0      0 bps
Queue: 3, Forwarding classes: network-control
  Queued:
    Packets      :      0      0 pps
    Bytes        :      0      0 bps
  Transmitted:

```



```

Packets          :          0          0 pps
Bytes            :          0          0 bps
Tail-dropped packets : Not Available
RED-dropped packets :          0          0 pps
  Low            :          0          0 pps
  Medium-low     :          0          0 pps
  Medium-high    :          0          0 pps
  High           :          0          0 pps
RED-dropped bytes  :          0          0 bps
  Low            :          0          0 bps
  Medium-low     :          0          0 bps
  Medium-high    :          0          0 bps
  High           :          0          0 bps
Forwarding classes: 16 supported, 4 in use
Egress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
    Packets      :      109355853      471736 pps
    Bytes        :      7436199152     256627968 bps
  Transmitted:
    Packets      :      109355852      471736 pps
    Bytes        :      7436198640     256627968 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :          0          0 pps
      Low        :          0          0 pps
      Medium-low :          0          0 pps
      Medium-high :          0          0 pps
      High       :          0          0 pps
    RED-dropped bytes  :          0          0 bps
      Low        :          0          0 bps
      Medium-low :          0          0 bps
      Medium-high :          0          0 bps
      High       :          0          0 bps
Queue: 1, Forwarding classes: expedited-forwarding
  Queued:
    Packets      :          0          0 pps
    Bytes        :          0          0 bps
  Transmitted:
    Packets      :          0          0 pps
    Bytes        :          0          0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :          0          0 pps
      Low        :          0          0 pps
      Medium-low :          0          0 pps
      Medium-high :          0          0 pps
      High       :          0          0 pps
    RED-dropped bytes  :          0          0 bps
      Low        :          0          0 bps
      Medium-low :          0          0 bps
      Medium-high :          0          0 bps
      High       :          0          0 bps
Queue: 2, Forwarding classes: assured-forwarding
  Queued:
    Packets      :          0          0 pps
    Bytes        :          0          0 bps
  Transmitted:
    Packets      :          0          0 pps
    Bytes        :          0          0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :          0          0 pps
      Low        :          0          0 pps

```



```

Medium-low      : 0 0 pps
Medium-high     : 0 0 pps
High            : 0 0 pps
RED-dropped bytes : 0 0 bps
Low             : 0 0 bps
Medium-low      : 0 0 bps
Medium-high     : 0 0 bps
High            : 0 0 bps
Queue: 3, Forwarding classes: network-control
Queued:
Packets         : 0 0 pps
Bytes           : 0 0 bps
Transmitted:
Packets         : 0 0 pps
Bytes           : 0 0 bps
Tail-dropped packets : Not Available
RED-dropped packets : 0 0 pps
Low             : 0 0 pps
Medium-low      : 0 0 pps
Medium-high     : 0 0 pps
High            : 0 0 pps
RED-dropped bytes : 0 0 bps
Low             : 0 0 bps
Medium-low      : 0 0 bps
Medium-high     : 0 0 bps
High            : 0 0 bps

```

`show interfaces queue`  
 (Channelized OC12 IQE

```

user@host> show interfaces queue t3-1/1/0:7
Physical interface: t3-1/1/0:7, Enabled, Physical link is Up

```



**Type 3 PIC in SONET Mode)**

Interface index: 192, SNMP ifIndex: 1948

Description: full T3 interface connect to 6ce13 t3-3/1/0:7 for FR testing - Lam

Forwarding classes: 16 supported, 9 in use

Egress queues: 8 supported, 8 in use

Queue: 0, Forwarding classes: DEFAULT

## Queued:

Packets	:	214886	13449 pps
---------	---	--------	-----------

Bytes	:	9884756	5164536 bps
-------	---	---------	-------------

## Transmitted:

Packets	:	214886	13449 pps
---------	---	--------	-----------

Bytes	:	9884756	5164536 bps
-------	---	---------	-------------

Tail-dropped packets	:	0	0 pps
----------------------	---	---	-------

RED-dropped packets	:	0	0 pps
---------------------	---	---	-------

Low	:	0	0 pps
-----	---	---	-------

Medium-low	:	0	0 pps
------------	---	---	-------

Medium-high	:	0	0 pps
-------------	---	---	-------

High	:	0	0 pps
------	---	---	-------

RED-dropped bytes	:	0	0 bps
-------------------	---	---	-------

Low	:	0	0 bps
-----	---	---	-------

Medium-low	:	0	0 bps
------------	---	---	-------

Medium-high	:	0	0 bps
-------------	---	---	-------

High	:	0	0 bps
------	---	---	-------

Queue: 1, Forwarding classes: REALTIME

## Queued:

Packets	:	0	0 pps
---------	---	---	-------

Bytes	:	0	0 bps
-------	---	---	-------

## Transmitted:

Packets	:	0	0 pps
---------	---	---	-------

Bytes	:	0	0 bps
-------	---	---	-------

Tail-dropped packets	:	0	0 pps
----------------------	---	---	-------



RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
Medium-low	:	0	0 pps
Medium-high	:	0	0 pps
High	:	0	0 pps
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
Medium-low	:	0	0 bps
Medium-high	:	0	0 bps
High	:	0	0 bps

Queue: 2, Forwarding classes: PRIVATE

Queued:

Packets	:	0	0 pps
Bytes	:	0	0 bps

Transmitted:

Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	0 pps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
Medium-low	:	0	0 pps
Medium-high	:	0	0 pps
High	:	0	0 pps
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
Medium-low	:	0	0 bps
Medium-high	:	0	0 bps
High	:	0	0 bps

Queue: 3, Forwarding classes: CONTROL

Queued:

Packets	:	60	0 pps
---------	---	----	-------



Bytes	:	4560	0 bps
Transmitted:			
Packets	:	60	0 pps
Bytes	:	4560	0 bps
Tail-dropped packets	:	0	0 pps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
Medium-low	:	0	0 pps
Medium-high	:	0	0 pps
High	:	0	0 pps
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
Medium-low	:	0	0 bps
Medium-high	:	0	0 bps
High	:	0	0 bps
Queue: 4, Forwarding classes: CLASS_B_OUTPUT			
Queued:			
Packets	:	0	0 pps
Bytes	:	0	0 bps
Transmitted:			
Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	0 pps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
Medium-low	:	0	0 pps
Medium-high	:	0	0 pps
High	:	0	0 pps
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps



Medium-low	:	0	0 bps
Medium-high	:	0	0 bps
High	:	0	0 bps

Queue: 5, Forwarding classes: CLASS\_C\_OUTPUT

Queued:

Packets	:	0	0 pps
Bytes	:	0	0 bps

Transmitted:

Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	0 pps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
Medium-low	:	0	0 pps
Medium-high	:	0	0 pps
High	:	0	0 pps
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
Medium-low	:	0	0 bps
Medium-high	:	0	0 bps
High	:	0	0 bps

Queue: 6, Forwarding classes: CLASS\_V\_OUTPUT

Queued:

Packets	:	0	0 pps
Bytes	:	0	0 bps

Transmitted:

Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	0 pps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps



Medium-low	:	0	0 pps
Medium-high	:	0	0 pps
High	:	0	0 pps
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
Medium-low	:	0	0 bps
Medium-high	:	0	0 bps
High	:	0	0 bps

Queue: 7, Forwarding classes: CLASS\_S\_OUTPUT, GETS

Queued:

Packets	:	0	0 pps
Bytes	:	0	0 bps

Transmitted:

Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	0 pps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
Medium-low	:	0	0 pps
Medium-high	:	0	0 pps
High	:	0	0 pps
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
Medium-low	:	0	0 bps
Medium-high	:	0	0 bps
High	:	0	0 bps

Packet Forwarding Engine Chassis Queues:

Queues: 8 supported, 8 in use

Queue: 0, Forwarding classes: DEFAULT



## Queued:

Packets	:	371365	23620 pps
Bytes	:	15597330	7936368 bps

## Transmitted:

Packets	:	371365	23620 pps
Bytes	:	15597330	7936368 bps
Tail-dropped packets	:	0	0 pps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
Medium-low	:	0	0 pps
Medium-high	:	0	0 pps
High	:	0	0 pps
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
Medium-low	:	0	0 bps
Medium-high	:	0	0 bps
High	:	0	0 bps

## Queue: 1, Forwarding classes: REALTIME

## Queued:

Packets	:	0	0 pps
Bytes	:	0	0 bps

## Transmitted:

Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	0 pps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
Medium-low	:	0	0 pps
Medium-high	:	0	0 pps
High	:	0	0 pps
RED-dropped bytes	:	0	0 bps



Low	:	0	0 bps
Medium-low	:	0	0 bps
Medium-high	:	0	0 bps
High	:	0	0 bps

Queue: 2, Forwarding classes: PRIVATE

Queued:

Packets	:	0	0 pps
Bytes	:	0	0 bps

Transmitted:

Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	0 pps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
Medium-low	:	0	0 pps
Medium-high	:	0	0 pps
High	:	0	0 pps
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
Medium-low	:	0	0 bps
Medium-high	:	0	0 bps
High	:	0	0 bps

Queue: 3, Forwarding classes: CONTROL

Queued:

Packets	:	32843	0 pps
Bytes	:	2641754	56 bps

Transmitted:

Packets	:	32843	0 pps
Bytes	:	2641754	56 bps
Tail-dropped packets	:	0	0 pps



RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
Medium-low	:	0	0 pps
Medium-high	:	0	0 pps
High	:	0	0 pps
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
Medium-low	:	0	0 bps
Medium-high	:	0	0 bps
High	:	0	0 bps

Queue: 4, Forwarding classes: CLASS\_B\_OUTPUT

Queued:

Packets	:	0	0 pps
Bytes	:	0	0 bps

Transmitted:

Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	0 pps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
Medium-low	:	0	0 pps
Medium-high	:	0	0 pps
High	:	0	0 pps
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
Medium-low	:	0	0 bps
Medium-high	:	0	0 bps
High	:	0	0 bps

Queue: 5, Forwarding classes: CLASS\_C\_OUTPUT

Queued:

Packets	:	0	0 pps
---------	---	---	-------



Bytes	:	0	0 bps
Transmitted:			
Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	0 pps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
Medium-low	:	0	0 pps
Medium-high	:	0	0 pps
High	:	0	0 pps
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
Medium-low	:	0	0 bps
Medium-high	:	0	0 bps
High	:	0	0 bps
Queue: 6, Forwarding classes: CLASS_V_OUTPUT			
Queued:			
Packets	:	0	0 pps
Bytes	:	0	0 bps
Transmitted:			
Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	0 pps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
Medium-low	:	0	0 pps
Medium-high	:	0	0 pps
High	:	0	0 pps
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps



Medium-low	:	0	0 bps
Medium-high	:	0	0 bps
High	:	0	0 bps

Queue: 7, Forwarding classes: CLASS\_S\_OUTPUT, GETS

Queued:

Packets	:	0	0 pps
Bytes	:	0	0 bps

Transmitted:

Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	0 pps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
Medium-low	:	0	0 pps
Medium-high	:	0	0 pps
High	:	0	0 pps
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
Medium-low	:	0	0 bps
Medium-high	:	0	0 bps
High	:	0	0 bps

### show interfaces queue (QFX Series)

```

user@switch> show interfaces queue xe-0/0/15
Physical interface: xe-0/0/15, Enabled, Physical link is Up
Interface index: 49165, SNMP ifIndex: 539
Forwarding classes: 12 supported, 8 in use
Egress queues: 12 supported, 8 in use
Queue: 0, Forwarding classes: best-effort
Queued:
  Packets      :      0      0 pps
  Bytes       :      0      0 bps
Transmitted:
  Packets      :      0      0 pps
  Bytes       :      0      0 bps
  Tail-dropped packets : Not Available
  Total-dropped packets:      0      0 pps
  Total-dropped bytes  :      0      0 bps
Queue: 3, Forwarding classes: fcoe
Queued:
  Packets      :      0      0 pps

```



```

        Bytes           :                0                0 bps
    Transmitted:
        Packets         :                0                0 pps
        Bytes           :                0                0 bps
        Tail-dropped packets : Not Available
        Total-dropped packets:                0                0 pps
        Total-dropped bytes :                0                0 bps
0 bps
Queue: 4, Forwarding classes: no-loss
Queued:
    Packets           :                0                0 pps
    Bytes             :                0                0 bps
Transmitted:
    Packets           :                0                0 pps
    Bytes             :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped packets:                0                0 pps
    Total-dropped bytes :                0                0 bps
Queue: 7, Forwarding classes: network-control
Queued:
    Packets           :                0                0 pps
    Bytes             :                0                0 bps
Transmitted:
    Packets           :                0                0 pps
    Bytes             :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped packets:                0                0 pps
    Total-dropped bytes :                0                0 bps
Queue: 8, Forwarding classes: mcast
Queued:
    Packets           :                0                0 pps
    Bytes             :                0                0 bps
Transmitted:
    Packets           :                0                0 pps
    Bytes             :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped packets:                0                0 pps
    Total-dropped bytes :                0                0 bps

```

#### show interfaces queue l2-statistics (lsq interface)

```

user@switch> show interfaces queue lsq-2/2/0.2 l2-statistics
Logical interface lsq-2/2/0.2 (Index 69) (SNMP ifIndex 1598)
Forwarding classes: 16 supported, 4 in use
Egress queues: 8 supported, 4 in use
Burst size: 0
Queue: 0, Forwarding classes: be
Queued:
    Packets           :                1                0 pps
    Bytes             :            1001                0 bps
Transmitted:
    Packets           :                5                0 pps
    Bytes             :            1062                0 bps
    Tail-dropped packets :                0                0 pps
    RED-dropped packets :                0                0 pps
    RED-dropped bytes  :                0                0 bps
Queue: 1, Forwarding classes: ef
Queued:
    Packets           :                1                0 pps
    Bytes             :            1500                0 bps
Transmitted:
    Packets           :                6                0 pps
    Bytes             :            1573                0 bps

```



```
Tail-dropped packets :          0          0 pps
RED-dropped packets  :          0          0 pps
RED-dropped bytes    :          0          0 bps
Queue: 2, Forwarding classes: af
  Queued:
    Packets          :          1          0 pps
    Bytes            :         512          0 bps
  Transmitted:
    Packets          :          3          0 pps
    Bytes            :         549          0 bps
    Tail-dropped packets :          0          0 pps
    RED-dropped packets :          0          0 pps
    RED-dropped bytes  :          0          0 bps
Queue: 3, Forwarding classes: nc
  Queued:
    Packets          :          0          0 pps
    Bytes            :          0          0 bps
  Transmitted:
    Packets          :          0          0 pps
    Bytes            :          0          0 bps
    Tail-dropped packets :          0          0 pps
    RED-dropped packets :          0          0 pps
    RED-dropped bytes  :          0          0 bps
=====
```



## show interfaces queue fabric

<b>Syntax</b>	<pre>show interfaces queue fabric &lt;egress&gt; &lt;forwarding-class <i>forwarding-class</i>&gt; &lt;interface-name <i>interface-name</i>&gt;</pre>
<b>Release Information</b>	Command introduced in Junos OS Release 12.3 for the QFX Series.
<b>Description</b>	Display class-of-service (CoS) queue information for the fabric interfaces that are configured between Node devices and Interconnect devices.
<b>Options</b>	<p><b>none</b>—Show detailed CoS queue statistics for all physical interfaces.</p> <p><b>egress</b>—(Optional) Display egress queue statistics.</p> <p><b>forwarding-class <i>forwarding-class</i></b>—(Optional) Forwarding class name for this queue. Show detailed CoS statistics for the queue associated with the specified forwarding class.</p> <p><b>interface-name <i>interface-name</i></b>—(Optional) Show detailed CoS queue statistics for the specified interface.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><a href="#">show interfaces fabric on page 2146</a></li> </ul>
<b>List of Sample Output</b>	<p><a href="#">show interfaces queue fabric on page 2246</a></p> <p><a href="#">show interfaces queue fabric egress on page 2255</a></p> <p><a href="#">show interfaces queue fabric interface-name egress on page 2264</a></p> <p><a href="#">show interfaces queue fabric interface-name egress forwarding-class forwarding-class-name on page 2265</a></p>
<b>Output Fields</b>	<p><a href="#">Table 171 on page 2209</a> lists the output fields for the <b>show interfaces queue fabric</b> command. Output fields are listed in the approximate order in which they appear.</p>

**Table 173: show interfaces queue fabric Output Fields**

Field Name	Field Description
Physical interface	Name of the physical interface.



Table 173: show interfaces queue fabric Output Fields (*continued*)

Field Name	Field Description
<b>Enabled</b>	<p>State of the interface. Possible values are:</p> <ul style="list-style-type: none"> <li>Administratively down, Physical link is Down—The interface is turned off, and the physical link is inoperable.</li> <li>Administratively down, Physical link is Up—The interface is turned off, but the physical link is operational and can pass packets when it is enabled.</li> <li>Enabled, Physical link is Down—The interface is turned on, but the physical link is inoperable and cannot pass packets.</li> <li>Enabled, Physical link is Up—The interface is turned on, and the physical link is operational and can pass packets.</li> </ul>
<b>Interface index</b>	Physical interface's index number, which reflects its initialization sequence.
<b>SNMP ifIndex</b>	SNMP index number for the physical interface.
<b>Forwarding classes</b>	Number of forwarding classes supported and in use for the interface.
<b>Egress queues</b>	Number of output queues supported and in use on the specified interface.
<b>Queue</b>	CoS queue number.
<b>Transmitted</b>	<p>Number of packets and bytes transmitted by this queue. Information on transmitted packets and bytes can include:</p> <ul style="list-style-type: none"> <li>Packets—Number of packets transmitted.</li> <li>Bytes—Number of bytes transmitted.</li> <li>Tail-dropped packets—Number of arriving packets dropped because output queue buffers were full.</li> <li>Total-dropped pkts—Number of transmitted packets dropped.</li> <li>Total dropped bytes—Number of transmitted bytes dropped.</li> </ul>
<b>Queued</b>	<p>Number of packets and bytes queued to this queue.</p> <ul style="list-style-type: none"> <li>Packets—Number of packets queued.</li> <li>Bytes—Number of bytes queued.</li> </ul>



## Sample Output

```

show interfaces queue fabric
user@switch> show interfaces queue fabric
Physical interface: IC-WS001:fte-0/0/15, Enabled, Physical link is Up
Interface index: 49178, SNMP ifIndex: 1208484475
Forwarding classes: 16 supported, 5 in use
Egress queues: 12 supported, 5 in use
Queue: 0, Forwarding classes: fabric_fcset_be
  Queued:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :          62665971                0 pps
    Bytes        :      7770580404                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :                0                0 pps
    Total-dropped bytes :                0                0 bps
Queue: 1, Forwarding classes: fabric_fcset_noloss1
  Queued:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :                0                0 pps
    Total-dropped bytes :                0                0 bps
Queue: 2, Forwarding classes: fabric_fcset_noloss2
  Queued:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :                0                0 pps
    Total-dropped bytes :                0                0 bps
Queue: 3, Forwarding classes: fabric_fcset_noloss3
  Queued:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :                0                0 pps
    Total-dropped bytes :                0                0 bps
Queue: 4, Forwarding classes: fabric_fcset_noloss4
  Queued:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :                0                0 pps
    Total-dropped bytes :                0                0 bps
Queue: 5, Forwarding classes: fabric_fcset_noloss5
  Queued:
    Packets      :                0                0 pps

```



```

    Bytes                :                0                0 bps
  Transmitted:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts   :                0                0 pps
    Total-dropped bytes  :                0                0 bps
Queue: 6, Forwarding classes: fabric_fcset_noloss6
  Queued:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
  Transmitted:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts   :                0                0 pps
    Total-dropped bytes  :                0                0 bps
Queue: 7, Forwarding classes: fabric_fcset_strict_high
  Queued:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
  Transmitted:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts   :                0                0 pps
    Total-dropped bytes  :                0                0 bps
Queue: 8, Forwarding classes: fabric_fcset_mcast1
  Queued:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
  Transmitted:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts   :                0                0 pps
    Total-dropped bytes  :                0                0 bps
Queue: 9, Forwarding classes: fabric_fcset_mcast2
  Queued:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
  Transmitted:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts   :                0                0 pps
    Total-dropped bytes  :                0                0 bps
Queue: 10, Forwarding classes: fabric_fcset_mcast3
  Queued:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
  Transmitted:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts   :                0                0 pps
    Total-dropped bytes  :                0                0 bps
Queue: 11, Forwarding classes: fabric_fcset_mcast4
  Queued:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps

```



```

Transmitted:
Packets          :                0                0 pps
Bytes            :                0                0 bps
Tail-dropped packets : Not Available
Total-dropped pkts :                0                0 pps
Total-dropped bytes :                0                0 bps

Physical interface: IC-WS001:fte-1/0/2, Enabled, Physical link is Up
Interface index: 49211, SNMP ifIndex: 1208484377
Forwarding classes: 16 supported, 5 in use
Egress queues: 12 supported, 5 in use
Queue: 0, Forwarding classes: fabric_fcset_be
  Queued:
    Packets          :                0                0 pps
    Bytes            :                0                0 bps
  Transmitted:
    Packets          :                0                0 pps
    Bytes            :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts :                0                0 pps
    Total-dropped bytes :                0                0 bps
Queue: 1, Forwarding classes: fabric_fcset_noloss1
  Queued:
    Packets          :                0                0 pps
    Bytes            :                0                0 bps
  Transmitted:
    Packets          :                0                0 pps
    Bytes            :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts :                0                0 pps
    Total-dropped bytes :                0                0 bps
Queue: 2, Forwarding classes: fabric_fcset_noloss2
  Queued:
    Packets          :                0                0 pps
    Bytes            :                0                0 bps
  Transmitted:
    Packets          :                0                0 pps
    Bytes            :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts :                0                0 pps
    Total-dropped bytes :                0                0 bps
Queue: 3, Forwarding classes: fabric_fcset_noloss3
  Queued:
    Packets          :                0                0 pps
    Bytes            :                0                0 bps
  Transmitted:
    Packets          :                0                0 pps
    Bytes            :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts :                0                0 pps
    Total-dropped bytes :                0                0 bps
Queue: 4, Forwarding classes: fabric_fcset_noloss4
  Queued:
    Packets          :                0                0 pps
    Bytes            :                0                0 bps
  Transmitted:
    Packets          :                0                0 pps
    Bytes            :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts :                0                0 pps
    Total-dropped bytes :                0                0 bps

```



```

Queue: 5, Forwarding classes: fabric_fcset_noloss5
  Queued:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :                0                0 pps
    Total-dropped bytes :                0                0 bps
Queue: 6, Forwarding classes: fabric_fcset_noloss6
  Queued:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :                0                0 pps
    Total-dropped bytes :                0                0 bps
Queue: 7, Forwarding classes: fabric_fcset_strict_high
  Queued:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :                0                0 pps
    Total-dropped bytes :                0                0 bps
Queue: 8, Forwarding classes: fabric_fcset_mcast1
  Queued:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :                0                0 pps
    Total-dropped bytes :                0                0 bps
Queue: 9, Forwarding classes: fabric_fcset_mcast2
  Queued:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :                0                0 pps
    Total-dropped bytes :                0                0 bps
Queue: 10, Forwarding classes: fabric_fcset_mcast3
  Queued:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :                0                0 pps
    Total-dropped bytes :                0                0 bps
Queue: 11, Forwarding classes: fabric_fcset_mcast4

```



```

Queued:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
Tail-dropped packets : Not Available
Total-dropped pkts  :          0          0 pps
Total-dropped bytes :          0          0 bps

Physical interface: IC-WS001:fte-1/0/7, Enabled, Physical link is Up
Interface index: 49212, SNMP ifIndex: 1208484365
Forwarding classes: 16 supported, 5 in use
Egress queues: 12 supported, 5 in use
Queue: 0, Forwarding classes: fabric_fcset_be
  Queued:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps
  Transmitted:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :          0          0 pps
    Total-dropped bytes :          0          0 bps
Queue: 1, Forwarding classes: fabric_fcset_noloss1
  Queued:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps
  Transmitted:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :          0          0 pps
    Total-dropped bytes :          0          0 bps
Queue: 2, Forwarding classes: fabric_fcset_noloss2
  Queued:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps
  Transmitted:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :          0          0 pps
    Total-dropped bytes :          0          0 bps
Queue: 3, Forwarding classes: fabric_fcset_noloss3
  Queued:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps
  Transmitted:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :          0          0 pps
    Total-dropped bytes :          0          0 bps
Queue: 4, Forwarding classes: fabric_fcset_noloss4
  Queued:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps
  Transmitted:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps

```



```

Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps
Queue: 5, Forwarding classes: fabric_fcset_noloss5
Queued:
  Packets      : 0 0 pps
  Bytes       : 0 0 bps
Transmitted:
  Packets      : 0 0 pps
  Bytes       : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps
Queue: 6, Forwarding classes: fabric_fcset_noloss6
Queued:
  Packets      : 0 0 pps
  Bytes       : 0 0 bps
Transmitted:
  Packets      : 0 0 pps
  Bytes       : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps
Queue: 7, Forwarding classes: fabric_fcset_strict_high
Queued:
  Packets      : 0 0 pps
  Bytes       : 0 0 bps
Transmitted:
  Packets      : 0 0 pps
  Bytes       : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps
Queue: 8, Forwarding classes: fabric_fcset_mcast1
Queued:
  Packets      : 0 0 pps
  Bytes       : 0 0 bps
Transmitted:
  Packets      : 0 0 pps
  Bytes       : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps
Queue: 9, Forwarding classes: fabric_fcset_mcast2
Queued:
  Packets      : 0 0 pps
  Bytes       : 0 0 bps
Transmitted:
  Packets      : 0 0 pps
  Bytes       : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps
Queue: 10, Forwarding classes: fabric_fcset_mcast3
Queued:
  Packets      : 0 0 pps
  Bytes       : 0 0 bps
Transmitted:
  Packets      : 0 0 pps
  Bytes       : 0 0 bps
Tail-dropped packets : Not Available

```



```

Total-dropped pkts : 0 0 pps
Total-dropped bytes : 0 0 bps
Queue: 11, Forwarding classes: fabric_fcset_mcast4
Queued:
Packets : 0 0 pps
Bytes : 0 0 bps
Transmitted:
Packets : 0 0 pps
Bytes : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts : 0 0 pps
Total-dropped bytes : 0 0 bps

```

Physical interface: IC-WS001:fte-1/0/10, Enabled, Physical link is Up

Interface index: 49213, SNMP ifIndex: 1208484625

Forwarding classes: 16 supported, 5 in use

Egress queues: 12 supported, 5 in use

Queue: 0, Forwarding classes: fabric\_fcset\_be

```

Queued:
Packets : 0 0 pps
Bytes : 0 0 bps
Transmitted:
Packets : 0 0 pps
Bytes : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts : 0 0 pps
Total-dropped bytes : 0 0 bps

```

Queue: 1, Forwarding classes: fabric\_fcset\_noloss1

```

Queued:
Packets : 0 0 pps
Bytes : 0 0 bps
Transmitted:
Packets : 0 0 pps
Bytes : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts : 0 0 pps
Total-dropped bytes : 0 0 bps

```

Queue: 2, Forwarding classes: fabric\_fcset\_noloss2

```

Queued:
Packets : 0 0 pps
Bytes : 0 0 bps
Transmitted:
Packets : 0 0 pps
Bytes : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts : 0 0 pps
Total-dropped bytes : 0 0 bps

```

Queue: 3, Forwarding classes: fabric\_fcset\_noloss3

```

Queued:
Packets : 0 0 pps
Bytes : 0 0 bps
Transmitted:
Packets : 0 0 pps
Bytes : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts : 0 0 pps
Total-dropped bytes : 0 0 bps

```

Queue: 4, Forwarding classes: fabric\_fcset\_noloss4

```

Queued:
Packets : 0 0 pps
Bytes : 0 0 bps

```



```

Transmitted:
  Packets      :      0      0 pps
  Bytes        :      0      0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :      0      0 pps
  Total-dropped bytes :      0      0 bps
Queue: 5, Forwarding classes: fabric_fcset_noloss5
Queued:
  Packets      :      0      0 pps
  Bytes        :      0      0 bps
Transmitted:
  Packets      :      0      0 pps
  Bytes        :      0      0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :      0      0 pps
  Total-dropped bytes :      0      0 bps
Queue: 6, Forwarding classes: fabric_fcset_noloss6
Queued:
  Packets      :      0      0 pps
  Bytes        :      0      0 bps
Transmitted:
  Packets      :      0      0 pps
  Bytes        :      0      0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :      0      0 pps
  Total-dropped bytes :      0      0 bps
Queue: 7, Forwarding classes: fabric_fcset_strict_high
Queued:
  Packets      :      0      0 pps
  Bytes        :      0      0 bps
Transmitted:
  Packets      :      0      0 pps
  Bytes        :      0      0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :      0      0 pps
  Total-dropped bytes :      0      0 bps
Queue: 8, Forwarding classes: fabric_fcset_mcast1
Queued:
  Packets      :      0      0 pps
  Bytes        :      0      0 bps
Transmitted:
  Packets      :      0      0 pps
  Bytes        :      0      0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :      0      0 pps
  Total-dropped bytes :      0      0 bps
Queue: 9, Forwarding classes: fabric_fcset_mcast2
Queued:
  Packets      :      0      0 pps
  Bytes        :      0      0 bps
Transmitted:
  Packets      :      0      0 pps
  Bytes        :      0      0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :      0      0 pps
  Total-dropped bytes :      0      0 bps
Queue: 10, Forwarding classes: fabric_fcset_mcast3
Queued:
  Packets      :      0      0 pps
  Bytes        :      0      0 bps
Transmitted:

```



```

Packets          : 0 0 pps
Bytes            : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts : 0 0 pps
Total-dropped bytes : 0 0 bps
Queue: 11, Forwarding classes: fabric_fcset_mcast4
  Queued:
    Packets      : 0 0 pps
    Bytes        : 0 0 bps
  Transmitted:
    Packets      : 0 0 pps
    Bytes        : 0 0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts : 0 0 pps
    Total-dropped bytes : 0 0 bps

Physical interface: P2659-C:fte-0/1/2, Enabled, Physical link is Up
  Interface index: 49161, SNMP ifIndex: 1209008630
  Forwarding classes: 16 supported, 5 in use
  Egress queues: 12 supported, 5 in use
  Queue: 0, Forwarding classes: best-effort
    Queued:
      Packets      : 0 0 pps
      Bytes        : 0 0 bps
    Transmitted:
      Packets      : 0 0 pps
      Bytes        : 0 0 bps
      Tail-dropped packets : Not Available
      Total-dropped pkts : 0 0 pps
      Total-dropped bytes : 0 0 bps
  Queue: 3, Forwarding classes: fcoe
    Queued:
      Packets      : 0 0 pps
      Bytes        : 0 0 bps
    Transmitted:
      Packets      : 0 0 pps
      Bytes        : 0 0 bps
      Tail-dropped packets : Not Available
      Total-dropped pkts : 0 0 pps
      Total-dropped bytes : 0 0 bps
  Queue: 4, Forwarding classes: no-loss
    Queued:
      Packets      : 0 0 pps
      Bytes        : 0 0 bps
    Transmitted:
      Packets      : 0 0 pps
      Bytes        : 0 0 bps
      Tail-dropped packets : Not Available
      Total-dropped pkts : 0 0 pps
      Total-dropped bytes : 0 0 bps
  Queue: 7, Forwarding classes: network-control
    Queued:
      Packets      : 0 0 pps
      Bytes        : 0 0 bps
    Transmitted:
      Packets      : 0 0 pps
      Bytes        : 0 0 bps
      Tail-dropped packets : Not Available
      Total-dropped pkts : 0 0 pps
      Total-dropped bytes : 0 0 bps
  Queue: 8, Forwarding classes: mcast

```



```

Queued:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
Tail-dropped packets : Not Available
Total-dropped pkts  :          0          0 pps
Total-dropped bytes :          0          0 bps

```

#### show interfaces queue fabric egress

```

user@switch> show interfaces queue fabric egress
Physical interface: IC-WS001:fte-0/0/15, Enabled, Physical link is Up
Interface index: 49178, SNMP ifIndex: 1208484475
Forwarding classes: 16 supported, 5 in use
Egress queues: 12 supported, 5 in use
Queue: 0, Forwarding classes: fabric_fcset_be
  Queued:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps
  Transmitted:
    Packets      :      62665971          0 pps
    Bytes       :    7770580404          0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :          0          0 pps
    Total-dropped bytes :          0          0 bps
Queue: 1, Forwarding classes: fabric_fcset_noloss1
  Queued:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps
  Transmitted:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :          0          0 pps
    Total-dropped bytes :          0          0 bps
Queue: 2, Forwarding classes: fabric_fcset_noloss2
  Queued:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps
  Transmitted:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :          0          0 pps
    Total-dropped bytes :          0          0 bps
Queue: 3, Forwarding classes: fabric_fcset_noloss3
  Queued:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps
  Transmitted:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :          0          0 pps
    Total-dropped bytes :          0          0 bps
Queue: 4, Forwarding classes: fabric_fcset_noloss4
  Queued:
    Packets      :          0          0 pps
    Bytes       :          0          0 bps
  Transmitted:
    Packets      :          0          0 pps

```



```

Bytes : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts : 0 0 pps
Total-dropped bytes : 0 0 bps
Queue: 5, Forwarding classes: fabric_fcset_noloss5
Queued:
Packets : 0 0 pps
Bytes : 0 0 bps
Transmitted:
Packets : 0 0 pps
Bytes : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts : 0 0 pps
Total-dropped bytes : 0 0 bps
Queue: 6, Forwarding classes: fabric_fcset_noloss6
Queued:
Packets : 0 0 pps
Bytes : 0 0 bps
Transmitted:
Packets : 0 0 pps
Bytes : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts : 0 0 pps
Total-dropped bytes : 0 0 bps
Queue: 7, Forwarding classes: fabric_fcset_strict_high
Queued:
Packets : 0 0 pps
Bytes : 0 0 bps
Transmitted:
Packets : 0 0 pps
Bytes : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts : 0 0 pps
Total-dropped bytes : 0 0 bps
Queue: 8, Forwarding classes: fabric_fcset_mcast1
Queued:
Packets : 0 0 pps
Bytes : 0 0 bps
Transmitted:
Packets : 0 0 pps
Bytes : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts : 0 0 pps
Total-dropped bytes : 0 0 bps
Queue: 9, Forwarding classes: fabric_fcset_mcast2
Queued:
Packets : 0 0 pps
Bytes : 0 0 bps
Transmitted:
Packets : 0 0 pps
Bytes : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts : 0 0 pps
Total-dropped bytes : 0 0 bps
Queue: 10, Forwarding classes: fabric_fcset_mcast3
Queued:
Packets : 0 0 pps
Bytes : 0 0 bps
Transmitted:
Packets : 0 0 pps
Bytes : 0 0 bps

```



```

Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps
Queue: 11, Forwarding classes: fabric_fcset_mcast4
Queued:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Transmitted:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps

```

Physical interface: IC-WS001:fte-1/0/2, Enabled, Physical link is Up

Interface index: 49211, SNMP ifIndex: 1208484377

Forwarding classes: 16 supported, 5 in use

Egress queues: 12 supported, 5 in use

Queue: 0, Forwarding classes: fabric\_fcset\_be

```

Queued:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Transmitted:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps

```

Queue: 1, Forwarding classes: fabric\_fcset\_noloss1

```

Queued:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Transmitted:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps

```

Queue: 2, Forwarding classes: fabric\_fcset\_noloss2

```

Queued:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Transmitted:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps

```

Queue: 3, Forwarding classes: fabric\_fcset\_noloss3

```

Queued:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Transmitted:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps

```

Queue: 4, Forwarding classes: fabric\_fcset\_noloss4

```

Queued:
  Packets : 0 0 pps

```



```

    Bytes                :                0                0 bps
    Transmitted:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts   :                0                0 pps
    Total-dropped bytes  :                0                0 bps
Queue: 5, Forwarding classes: fabric_fcset_noloss5
Queued:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
    Transmitted:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts   :                0                0 pps
    Total-dropped bytes  :                0                0 bps
Queue: 6, Forwarding classes: fabric_fcset_noloss6
Queued:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
    Transmitted:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts   :                0                0 pps
    Total-dropped bytes  :                0                0 bps
Queue: 7, Forwarding classes: fabric_fcset_strict_high
Queued:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
    Transmitted:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts   :                0                0 pps
    Total-dropped bytes  :                0                0 bps
Queue: 8, Forwarding classes: fabric_fcset_mcast1
Queued:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
    Transmitted:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts   :                0                0 pps
    Total-dropped bytes  :                0                0 bps
Queue: 9, Forwarding classes: fabric_fcset_mcast2
Queued:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
    Transmitted:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts   :                0                0 pps
    Total-dropped bytes  :                0                0 bps
Queue: 10, Forwarding classes: fabric_fcset_mcast3
Queued:
    Packets              :                0                0 pps
    Bytes                :                0                0 bps

```



```

Transmitted:
  Packets      :          0          0 pps
  Bytes        :          0          0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :          0          0 pps
  Total-dropped bytes :          0          0 bps
Queue: 11, Forwarding classes: fabric_fcset_mcast4
Queued:
  Packets      :          0          0 pps
  Bytes        :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes        :          0          0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :          0          0 pps
  Total-dropped bytes :          0          0 bps

Physical interface: IC-WS001:fte-1/0/7, Enabled, Physical link is Up
Interface index: 49212, SNMP ifIndex: 1208484365
Forwarding classes: 16 supported, 5 in use
Egress queues: 12 supported, 5 in use
Queue: 0, Forwarding classes: fabric_fcset_be
Queued:
  Packets      :          0          0 pps
  Bytes        :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes        :          0          0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :          0          0 pps
  Total-dropped bytes :          0          0 bps
Queue: 1, Forwarding classes: fabric_fcset_noloss1
Queued:
  Packets      :          0          0 pps
  Bytes        :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes        :          0          0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :          0          0 pps
  Total-dropped bytes :          0          0 bps
Queue: 2, Forwarding classes: fabric_fcset_noloss2
Queued:
  Packets      :          0          0 pps
  Bytes        :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes        :          0          0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :          0          0 pps
  Total-dropped bytes :          0          0 bps
Queue: 3, Forwarding classes: fabric_fcset_noloss3
Queued:
  Packets      :          0          0 pps
  Bytes        :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes        :          0          0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :          0          0 pps
  Total-dropped bytes :          0          0 bps

```



```

Queue: 4, Forwarding classes: fabric_fcset_noloss4
  Queued:
    Packets      :           0           0 pps
    Bytes        :           0           0 bps
  Transmitted:
    Packets      :           0           0 pps
    Bytes        :           0           0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :           0           0 pps
    Total-dropped bytes :           0           0 bps
Queue: 5, Forwarding classes: fabric_fcset_noloss5
  Queued:
    Packets      :           0           0 pps
    Bytes        :           0           0 bps
  Transmitted:
    Packets      :           0           0 pps
    Bytes        :           0           0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :           0           0 pps
    Total-dropped bytes :           0           0 bps
Queue: 6, Forwarding classes: fabric_fcset_noloss6
  Queued:
    Packets      :           0           0 pps
    Bytes        :           0           0 bps
  Transmitted:
    Packets      :           0           0 pps
    Bytes        :           0           0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :           0           0 pps
    Total-dropped bytes :           0           0 bps
Queue: 7, Forwarding classes: fabric_fcset_strict_high
  Queued:
    Packets      :           0           0 pps
    Bytes        :           0           0 bps
  Transmitted:
    Packets      :           0           0 pps
    Bytes        :           0           0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :           0           0 pps
    Total-dropped bytes :           0           0 bps
Queue: 8, Forwarding classes: fabric_fcset_mcast1
  Queued:
    Packets      :           0           0 pps
    Bytes        :           0           0 bps
  Transmitted:
    Packets      :           0           0 pps
    Bytes        :           0           0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :           0           0 pps
    Total-dropped bytes :           0           0 bps
Queue: 9, Forwarding classes: fabric_fcset_mcast2
  Queued:
    Packets      :           0           0 pps
    Bytes        :           0           0 bps
  Transmitted:
    Packets      :           0           0 pps
    Bytes        :           0           0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts  :           0           0 pps
    Total-dropped bytes :           0           0 bps
Queue: 10, Forwarding classes: fabric_fcset_mcast3

```



```

Queued:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :          0          0 pps
  Total-dropped bytes :          0          0 bps
Queue: 11, Forwarding classes: fabric_fcset_mcast4
Queued:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :          0          0 pps
  Total-dropped bytes :          0          0 bps

Physical interface: IC-WS001:fte-1/0/10, Enabled, Physical link is Up
Interface index: 49213, SNMP ifIndex: 1208484625
Forwarding classes: 16 supported, 5 in use
Egress queues: 12 supported, 5 in use
Queue: 0, Forwarding classes: fabric_fcset_be
Queued:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :          0          0 pps
  Total-dropped bytes :          0          0 bps
Queue: 1, Forwarding classes: fabric_fcset_noloss1
Queued:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :          0          0 pps
  Total-dropped bytes :          0          0 bps
Queue: 2, Forwarding classes: fabric_fcset_noloss2
Queued:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :          0          0 pps
  Total-dropped bytes :          0          0 bps
Queue: 3, Forwarding classes: fabric_fcset_noloss3
Queued:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps

```



```

Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps
Queue: 4, Forwarding classes: fabric_fcset_noloss4
Queued:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Transmitted:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps
Queue: 5, Forwarding classes: fabric_fcset_noloss5
Queued:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Transmitted:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps
Queue: 6, Forwarding classes: fabric_fcset_noloss6
Queued:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Transmitted:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps
Queue: 7, Forwarding classes: fabric_fcset_strict_high
Queued:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Transmitted:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps
Queue: 8, Forwarding classes: fabric_fcset_mcast1
Queued:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Transmitted:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Tail-dropped packets : Not Available
Total-dropped pkts   : 0 0 pps
Total-dropped bytes  : 0 0 bps
Queue: 9, Forwarding classes: fabric_fcset_mcast2
Queued:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Transmitted:
  Packets : 0 0 pps
  Bytes   : 0 0 bps
Tail-dropped packets : Not Available

```



```

    Total-dropped pkts : 0 0 pps
    Total-dropped bytes : 0 0 bps
Queue: 10, Forwarding classes: fabric_fcset_mcast3
  Queued:
    Packets : 0 0 pps
    Bytes : 0 0 bps
  Transmitted:
    Packets : 0 0 pps
    Bytes : 0 0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts : 0 0 pps
    Total-dropped bytes : 0 0 bps
Queue: 11, Forwarding classes: fabric_fcset_mcast4
  Queued:
    Packets : 0 0 pps
    Bytes : 0 0 bps
  Transmitted:
    Packets : 0 0 pps
    Bytes : 0 0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts : 0 0 pps
    Total-dropped bytes : 0 0 bps

Physical interface: P2659-C:fte-0/1/2, Enabled, Physical link is Up
  Interface index: 49161, SNMP ifIndex: 1209008630
Forwarding classes: 16 supported, 5 in use
Egress queues: 12 supported, 5 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
    Packets : 0 0 pps
    Bytes : 0 0 bps
  Transmitted:
    Packets : 0 0 pps
    Bytes : 0 0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts : 0 0 pps
    Total-dropped bytes : 0 0 bps
Queue: 3, Forwarding classes: fcoe
  Queued:
    Packets : 0 0 pps
    Bytes : 0 0 bps
  Transmitted:
    Packets : 0 0 pps
    Bytes : 0 0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts : 0 0 pps
    Total-dropped bytes : 0 0 bps
Queue: 4, Forwarding classes: no-loss
  Queued:
    Packets : 0 0 pps
    Bytes : 0 0 bps
  Transmitted:
    Packets : 0 0 pps
    Bytes : 0 0 bps
    Tail-dropped packets : Not Available
    Total-dropped pkts : 0 0 pps
    Total-dropped bytes : 0 0 bps
Queue: 7, Forwarding classes: network-control
  Queued:
    Packets : 0 0 pps
    Bytes : 0 0 bps

```



```

Transmitted:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :          0          0 pps
  Total-dropped bytes :          0          0 bps
Queue: 8, Forwarding classes: mcast
Queued:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :          0          0 pps
  Total-dropped bytes :          0          0 bps

```

**show interfaces queue  
fabric interface-name  
egress**

```

user@switch> show interfaces queue fabric BBAK0394:fte-0/1/0 egress
Physical interface: BBAK0394:fte-0/1/0, Enabled, Physical link is Up
Interface index: 129, SNMP ifIndex: 1091568120 Forwarding classes: 16 supported,
5 in use Egress queues: 12 supported, 5 in use
Queue: 0, Forwarding classes: best-effort
Queued:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
Transmitted:
  Packets      :          74777763341          844587 pps
  Bytes       :          9272442654284          837830728 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :          0          0 pps
  Total-dropped bytes :          0          0 bps
Queue: 3, Forwarding classes: fcoe
Queued:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :          0          0 pps
  Total-dropped bytes :          0          0 bps
Queue: 4, Forwarding classes: no-loss
Queued:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :          0          0 pps
  Total-dropped bytes :          0          0 bps
Queue: 7, Forwarding classes: network-control
Queued:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
  Tail-dropped packets : Not Available
  Total-dropped pkts  :          0          0 pps
  Total-dropped bytes :          0          0 bps

```



```

Queue: 8, Forwarding classes: mcast
Queued:
  Packets      :                0                0 pps
  Bytes        :                0                0 bps
Transmitted:
  Packets      :                0                0 pps
  Bytes        :                0                0 bps
Tail-dropped packets : Not Available
Total-dropped pkts  :                0                0 pps
Total-dropped bytes :                0                0 bps

```

```

show interfaces queue
fabric interface-name
egress
forwarding-class
forwarding-class-name

```

```

user@switch> show interfaces queue fabric BBAK0394:fte-0/1/0 egress forwarding-class
best-effort
Physical interface: BBAK0394:fte-0/1/0, Enabled, Physical link is Up
Interface index: 129, SNMP ifIndex: 1091568120 Forwarding classes: 16 supported,
5 in use Egress queues: 12 supported, 5 in use
Queue: 0, Forwarding classes: best-effort
Queued:
  Packets      :                0                0 pps
  Bytes        :                0                0 bps
Transmitted:
  Packets      :          74793424543          844612 pps
  Bytes        :    9274384643332      837855936 bps
Tail-dropped packets : Not Available
Total-dropped pkts  :                0                0 pps
Total-dropped bytes :                0                0 bps

```



## show interfaces xe

---

<b>Syntax</b>	<code>show interfaces <i>device-name:type-fpc/pic/port</i></code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;descriptions&gt;</code> <code>&lt;media&gt;</code> <code>&lt;routing-instance (all   <i>instance-name</i>)&gt;</code> <code>&lt;snmp-index <i>snmp-index</i>&gt;</code> <code>&lt;statistics&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display status information about the specified 10-Gigabit Ethernet interface. This command does not display statistics for routed VLAN interfaces.
<b>Options</b>	<p><b><i>device-name:type-fpc/pic/port</i></b>—(QFabric systems only) The device name is either the serial number or the alias of the QFabric system component, such as a Node device, Interconnect device, or QFabric infrastructure. The name must contain a maximum of 128 characters and not contain any colons.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>routing-instance (all   <i>instance-name</i>)</b>—(Optional) Display the name of an individual routing instance or display all routing instances.</p> <p><b>snmp-index <i>snmp-index</i></b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Monitoring Interface Status and Traffic on page 279</a></li><li>• <a href="#">Troubleshooting Network Interfaces on page 1106</a></li><li>• <a href="#">Troubleshooting an Aggregated Ethernet Interface on page 1107</a></li><li>• Junos® OS Network Interfaces</li></ul>
<b>List of Sample Output</b>	<a href="#">show interfaces on page 2275</a> <a href="#">show interfaces (Asymmetric Flow Control) on page 2275</a> <a href="#">show interfaces brief on page 2275</a> <a href="#">show interfaces detail on page 2276</a> <a href="#">show interfaces detail (Asymmetric Flow Control) on page 2277</a> <a href="#">show interfaces extensive on page 2278</a> <a href="#">show interfaces extensive (Asymmetric Flow Control) on page 2280</a>



[show interfaces terse on page 2282](#)

[show interfaces \(QFabric System\) on page 2283](#)

**Output Fields** Table 134 on page 1719 lists the output fields for the **show interfaces xe** command. Output fields are listed in the approximate order in which they appear.

**Table 174: show interfaces xe Output Fields**

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		
<b>Physical interface</b>	Name of the physical interface.	All levels
<b>Enabled</b>	State of the interface.	All levels
<b>Interface index</b>	Index number of the physical interface, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	SNMP index number for the physical interface.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Link-level type</b>	Encapsulation being used on the physical interface.	All levels
<b>MTU</b>	Maximum transmission unit size on the physical interface.	All levels
<b>Speed</b>	Speed at which the interface is running.	All levels
<b>Duplex</b>	Duplex mode of the interface, either <b>Full-Duplex</b> or <b>Half-Duplex</b> .	All levels
<b>Loopback</b>	Loopback status: <b>Enabled</b> or <b>Disabled</b> . If loopback is enabled, type of loopback: <b>Local</b> or <b>Remote</b> .	All levels
<b>Source filtering</b>	Source filtering status: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>LAN-PHY mode</b>	10-Gigabit Ethernet interface operating in Local Area Network Physical Layer Device (LAN PHY) mode. LAN PHY allows 10-Gigabit Ethernet wide area links to use existing Ethernet applications.	All levels
<b>Unidirectional</b>	Unidirectional link mode status for 10-Gigabit Ethernet interface: <b>Enabled</b> or <b>Disabled</b> for parent interface; <b>Rx-only</b> or <b>Tx-only</b> for child interfaces.	All levels
<b>Flow control</b>	Flow control status: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>NOTE:</b> This field is only displayed if asymmetric flow control is not configured.		



Table 174: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Configured-flow-control</b>	Configured flow control for the interface transmit buffers ( <b>tx-buffers</b> ) and receive buffers ( <b>rx-buffers</b> ): <ul style="list-style-type: none"> <li><b>tx-buffers</b>—<b>On</b> if the interface is configured to respond to Ethernet PAUSE messages received from the connected peer. <b>Off</b> if the interface is not configured to respond to received PAUSE messages.</li> <li><b>rx-buffers</b>—<b>On</b> if the interface is configured to generate and send Ethernet PAUSE messages to the connected peer. <b>Off</b> if the interface is not configured to generate and send PAUSE messages.</li> </ul> <p><b>NOTE:</b> This field is only displayed if asymmetric flow control is configured.</p>	All levels
<b>Auto-negotiation</b>	Autonegotiation status: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>Remote-fault</b>	Remote fault status: <ul style="list-style-type: none"> <li><b>Online</b>—Autonegotiation is manually configured as online.</li> <li><b>Offline</b>—Autonegotiation is manually configured as offline.</li> </ul>	All levels
<b>Device flags</b>	Information about the physical device.	All levels
<b>Interface flags</b>	Information about the interface.	All levels
<b>Link flags</b>	Information about the link.	All levels
<b>Wavelength</b>	Configured wavelength, in nanometers (nm).	All levels
<b>Frequency</b>	Frequency associated with the configured wavelength, in terahertz (THz).	All levels
<b>CoS queues</b>	Number of CoS queues configured.	<b>detail extensive none</b>
<b>Schedulers</b>	Number of CoS schedulers configured.	<b>extensive</b>
<b>Hold-times</b>	Current interface hold-time up and hold-time down, in milliseconds.	<b>detail extensive</b>
<b>Current address</b>	Configured MAC address.	<b>detail extensive none</b>
<b>Hardware address</b>	Hardware MAC address.	<b>detail extensive none</b>
<b>Last flapped</b>	Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: year-month-day hour:minute:second:timezone (hour:minute:second ago)</b> . For example, <b>Last flapped: 2008-01-16 10:52:40 UTC (3d 22:58 ago)</b> .	<b>detail extensive none</b>
<b>Input Rate</b>	Input rate in bits per second (bps) and packets per second (pps).	None specified
<b>Output Rate</b>	Output rate in bps and pps.	None specified
<b>Statistics last cleared</b>	Time when the statistics for the interface were last set to zero.	<b>detail extensive</b>



Table 174: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Traffic statistics</b>	<p>Number and rate of bytes and packets received and transmitted on the physical interface.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul> <p><b>NOTE:</b> The bandwidth bps counter is not enabled.</p>	<b>detail extensive</b>
<b>Input errors</b>	<p>Input errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Errors</b>—Sum of the incoming frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the input queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Framing errors</b>—Number of packets received with an invalid frame checksum (FCS).</li> <li>• <b>Runts</b>—Number of frames received that are smaller than the runt threshold.</li> <li>• <b>Policed discards</b>—Number of frames that the incoming packet match code discarded because they were not recognized or not of interest. Usually, this field reports protocols that Junos OS does not handle.</li> <li>• <b>L3 incompletes</b>—Number of incoming packets discarded because they failed Layer 3 sanity checks of the header. For example, a frame with less than 20 bytes of available IP header is discarded. L3 incomplete errors can be ignored if you configure the <b>ignore-l3-incompletes</b> statement.</li> <li>• <b>L2 channel errors</b>—Number of times the software did not find a valid logical interface for an incoming frame.</li> <li>• <b>L2 mismatch timeouts</b>—Number of malformed or short packets that caused the incoming packet handler to discard the frame as unreadable.</li> <li>• <b>FIFO errors</b>—Number of FIFO errors in the receive direction that are reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>



Table 174: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Output errors</b>	<p>Output errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Carrier transitions</b>—Number of times the interface has gone from <b>down</b> to <b>up</b>. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and then up, or another problem occurs. If the number of carrier transitions increments quickly (perhaps once every 10 seconds), the cable, the far-end system, or the PIC or PIM is malfunctioning.</li> <li>• <b>Errors</b>—Sum of the outgoing frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Collisions</b>—Number of Ethernet collisions. The Gigabit Ethernet PIC supports only full-duplex operation, so for Gigabit Ethernet PICs, this number should always remain 0. If it is nonzero, there is a software bug.</li> <li>• <b>Aged packets</b>—Number of packets that remained in shared packet SDRAM so long that the system automatically purged them. The value in this field should never increment. If it does, it is most likely a software bug or possibly malfunctioning hardware.</li> <li>• <b>FIFO errors</b>—Number of FIFO errors in the send direction as reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>• <b>HS link CRC errors</b>—Number of errors on the high-speed links between the ASICs responsible for handling the router interfaces.</li> <li>• <b>MTU errors</b>—Number of packets whose size exceeded the MTU of the interface.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>
<b>Egress queues</b>	Total number of egress queues supported on the specified interface.	<b>detail extensive</b>
<b>Queue counters (Egress)</b>	<p>CoS queue number and its associated user-configured forwarding class name.</p> <ul style="list-style-type: none"> <li>• <b>Queued packets</b>—Number of queued packets.</li> <li>• <b>Transmitted packets</b>—Number of transmitted packets.</li> <li>• <b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>	<b>detail extensive</b>
<b>Queue Number</b>	The CoS queue number and the forwarding classes mapped to the queue number. The <b>Mapped forwarding class</b> column lists the forwarding classes mapped to each CoS queue.	<b>detail extensive</b>
<b>Ingress queues</b>	Total number of ingress queues supported on the specified interface.	<b>extensive</b>
<b>Queue counters (Ingress)</b>	<p>CoS queue number and its associated user-configured forwarding class name.</p> <ul style="list-style-type: none"> <li>• <b>Queued packets</b>—Number of queued packets.</li> <li>• <b>Transmitted packets</b>—Number of transmitted packets.</li> <li>• <b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>	<b>extensive</b>



Table 174: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Active alarms and Active defects</b>	<p>Ethernet-specific defects that can prevent the interface from passing packets. When a defect persists for a certain amount of time, it is promoted to an alarm. Based on the switch configuration, an alarm can ring the red or yellow alarm bell on the switch, or turn on the red or yellow alarm LED on the craft interface. These fields can contain the value <b>None</b> or <b>Link</b>.</p> <ul style="list-style-type: none"> <li>• <b>None</b>—There are no active defects or alarms.</li> <li>• <b>Link</b>—Interface has lost its link state, which usually means that the cable is unplugged, the far-end system has been turned off, or the PIC is malfunctioning.</li> </ul>	<b>detail extensive none</b>
<b>PCS statistics</b>	Physical Coding Sublayer (PCS) fault conditions from the LAN PHY device.	<b>detail extensive</b>
<b>MAC statistics</b>	<p>Receive and Transmit statistics reported by the PIC's MAC subsystem.</p> <ul style="list-style-type: none"> <li>• <b>Total octets and total packets</b>—Total number of octets and packets. For Gigabit Ethernet IQ PICs, the received octets count varies by interface type.</li> <li>• <b>Unicast packets, Broadcast packets, and Multicast packets</b>—Number of unicast, broadcast, and multicast packets.</li> <li>• <b>CRC/Align errors</b>—Total number of packets received that had a length (excluding framing bits, but including FCS octets) of between 64 and 1518 octets, inclusive, and had either a bad FCS with an integral number of octets (FCS Error) or a bad FCS with a nonintegral number of octets (Alignment Error).</li> <li>• <b>FIFO error</b>—Number of FIFO errors that are reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>• <b>MAC control frames</b>—Number of MAC control frames.</li> <li>• <b>MAC pause frames</b>—Number of MAC control frames with <b>pause</b> operational code.</li> <li>• <b>Oversized frames</b>—Number of packets that exceeds the configured MTU.</li> <li>• <b>Jabber frames</b>—Number of frames that were longer than 1518 octets (excluding framing bits, but including FCS octets), and had either an FCS error or an alignment error. This definition of jabber is different from the definition in IEEE-802.3 section 8.2.1.5 (10BASE5) and section 10.3.1.4 (10BASE2). These documents define jabber as the condition in which any packet exceeds 20 ms. The allowed range to detect jabber is from 20 ms to 150 ms.</li> <li>• <b>Fragment frames</b>—Total number of packets that were less than 64 octets in length (excluding framing bits, but including FCS octets), and had either an FCS error or an alignment error. Fragment frames normally increment because both runs (which are normal occurrences caused by collisions) and noise hits are counted.</li> <li>• <b>VLAN tagged frames</b>—Number of frames that are VLAN tagged. The system uses the TPID of 0x8100 in the frame to determine whether a frame is tagged or not. This counter is not supported on EX Series switches and is always displayed as 0.</li> <li>• <b>Code violations</b>—Number of times an event caused the PHY to indicate "Data reception error" or "invalid data symbol error."</li> </ul>	<b>extensive</b>
<b>Filter statistics</b>	Receive and Transmit statistics reported by the PIC's MAC address filter subsystem.	<b>extensive</b>



Table 174: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
Autonegotiation information	<p>Information about link autonegotiation.</p> <ul style="list-style-type: none"> <li>• <b>Negotiation status:</b> <ul style="list-style-type: none"> <li>• <b>Incomplete</b>—Ethernet interface has the speed or link mode configured.</li> <li>• <b>No autonegotiation</b>—Remote Ethernet interface has the speed or link mode configured, or does not perform autonegotiation.</li> <li>• <b>Complete</b>—Ethernet interface is connected to a device that performs autonegotiation and the autonegotiation process is successful.</li> </ul> </li> <li>• <b>Link partner status</b>—OK when the Ethernet interface is connected to a device that performs autonegotiation and the autonegotiation process is successful.</li> <li>• <b>Link partner:</b> <ul style="list-style-type: none"> <li>• <b>Link mode</b>—Depending on the capability of the attached Ethernet device, either <b>Full-duplex</b> or <b>Half-duplex</b>.</li> <li>• <b>Flow control</b>—Types of flow control supported by the remote Ethernet device. For Fast Ethernet interfaces, the type is <b>None</b>. For Gigabit Ethernet interfaces, types are <b>Symmetric</b> (link partner supports <b>PAUSE</b> on receive and transmit), <b>Asymmetric</b> (link partner supports <b>PAUSE</b> on transmit), and <b>Symmetric/Asymmetric</b> (link partner supports both <b>PAUSE</b> on receive and transmit or only <b>PAUSE</b> receive).</li> <li>• <b>Remote fault</b>—Remote fault information from the link partner—<b>Failure</b> indicates a receive link error. <b>OK</b> indicates that the link partner is receiving. <b>Negotiation error</b> indicates a negotiation error. <b>Offline</b> indicates that the link partner is going offline.</li> </ul> </li> <li>• <b>Local resolution:</b> <ul style="list-style-type: none"> <li>• <b>Flow control</b>—Types of flow control supported by the remote Ethernet device. For Gigabit Ethernet interfaces, types are <b>Symmetric</b> (link partner supports <b>PAUSE</b> on receive and transmit), <b>Asymmetric</b> (link partner supports <b>PAUSE</b> on transmit), and <b>Symmetric/Asymmetric</b> (link partner supports both <b>PAUSE</b> on receive and transmit or only <b>PAUSE</b> receive). For asymmetric <b>PAUSE</b>, shows if the <b>PAUSE</b> transmit and <b>PAUSE</b> receive states on the interface are <b>enable</b> or <b>disable</b>.</li> <li>• <b>Remote fault</b>—Remote fault information. <b>Link OK</b> (no error detected on receive), <b>Offline</b> (local interface is offline), and <b>Link Failure</b> (link error detected on receive).</li> </ul> </li> </ul>	extensive



Table 174: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Packet Forwarding Engine configuration</b>	Information about the configuration of the Packet Forwarding Engine: <ul style="list-style-type: none"> <li><b>Destination slot</b>—FPC slot number.</li> <li><b>CoS transmit queue</b>—Queue number and its associated user-configured forwarding class name.</li> <li><b>Bandwidth %</b>—Percentage of bandwidth allocated to the queue.</li> <li><b>Bandwidth bps</b>—Bandwidth allocated to the queue (in bps).</li> <li><b>Buffer %</b>—Percentage of buffer space allocated to the queue.</li> <li><b>Buffer usec</b>—Amount of buffer space allocated to the queue, in microseconds. This value is nonzero only if the buffer size is configured in terms of time.</li> <li><b>Priority</b>—Queue priority: <b>low</b> or <b>high</b>.</li> <li><b>Limit</b>—Displayed if rate limiting is configured for the queue. Possible values are <b>none</b> and <b>exact</b>. If <b>exact</b> is configured, the queue transmits only up to the configured bandwidth, even if excess bandwidth is available. If <b>none</b> is configured, the queue transmits beyond the configured bandwidth if bandwidth is available.</li> </ul>	<b>extensive</b>
<b>Logical Interface</b>		
<b>Logical interface</b>	Name of the logical interface.	All levels
<b>Index</b>	Index number of the logical interface, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	SNMP interface index number for the logical interface.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Flags</b>	Information about the logical interface.	All levels
<b>Encapsulation</b>	Encapsulation on the logical interface.	All levels
<b>Protocol</b>	Protocol family.	<b>detail extensive none</b>
<b>Traffic statistics</b>	Number and rate of bytes and packets received (input) and transmitted (output) on the specified interface.	<b>detail extensive</b>
<b>IPv6 transit statistics</b>	If IPv6 statics tracking is enabled, number of IPv6 bytes and packets received and transmitted on the logical interface.	<b>extensive</b>
<b>Local statistics</b>	Number and rate of bytes and packets destined to and from the switch.	<b>extensive</b>
<b>Transit statistics</b>	Number and rate of bytes and packets transiting the switch.	<b>extensive</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Route Table</b>	Route table in which the logical interface address is located. For example, <b>0</b> refers to the routing table inet.0.	<b>detail extensive none</b>



Table 174: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Input Filters</b>	Names of any input filters applied to this interface.	<b>detail extensive</b>
<b>Output Filters</b>	Names of any output filters applied to this interface.	<b>detail extensive</b>
<b>Flags</b>	Information about protocol family flags.  If unicast Reverse Path Forwarding (uRPF) is explicitly configured on the specified interface, the uRPF flag appears. If uRPF was configured on a different interface (and therefore is enabled on all switch interfaces) but was not explicitly configured on the specified interface, the uRPF flag does not appear even though uRPF is enabled.	<b>detail extensive</b>
<b>Addresses, Flags</b>	Information about the address flags.	<b>detail extensive none</b>
<i>protocol-family</i>	Protocol family configured on the logical interface. If the protocol is <b>inet</b> , the IP address of the interface is also displayed.	<b>brief</b>
<b>Flags</b>	Information about the address flag.	<b>detail extensive none</b>
<b>Destination</b>	IP address of the remote side of the connection.	<b>detail extensive none</b>
<b>Local</b>	IP address of the logical interface.	<b>detail extensive none</b>
<b>Broadcast</b>	Broadcast address of the logical interlace.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>



## Sample Output

### show interfaces

```
user@switch> show interfaces xe-0/0/1
Physical interface: xe-0/0/1, Enabled, Physical link is Up
  Interface index: 49195, SNMP ifIndex: 591
  Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled,
  Flow control: Disabled
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x0
  Link flags     : None
  CoS queues     : 12 supported, 12 maximum usable queues
  Current address: 00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1
  Last flapped   : 2011-06-01 00:42:03 PDT (00:02:42 ago)
  Input rate     : 0 bps (0 pps)
  Output rate    : 0 bps (0 pps)
  Active alarms  : None
  Active defects : None

Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523)
  Flags: SNMP-Traps 0x0 Encapsulation: ENET2
  Input packets : 0
  Output packets: 0
  Protocol eth-switch, MTU: 0
  Flags: Trunk-Mode
```

### show interfaces (Asymmetric Flow Control)

```
user@switch> show interfaces xe-0/0/1
Physical interface: xe-0/0/1, Enabled, Physical link is Up
  Interface index: 49195, SNMP ifIndex: 591
  Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled,
  Configured-flow-control tx-buffers: off rx-buffers: on
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x0
  Link flags     : None
  CoS queues     : 12 supported, 12 maximum usable queues
  Current address: 00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1
  Last flapped   : 2011-06-01 00:42:03 PDT (00:02:42 ago)
  Input rate     : 0 bps (0 pps)
  Output rate    : 0 bps (0 pps)
  Active alarms  : None
  Active defects : None

Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523)
  Flags: SNMP-Traps 0x0 Encapsulation: ENET2
  Input packets : 0
  Output packets: 0
  Protocol eth-switch, MTU: 0
  Flags: Trunk-Mode
```

### show interfaces brief

```
user@switch> show interfaces xe-0/0/1 brief
Physical interface: xe-0/0/1, Enabled, Physical link is Up
  Link-level type: Ethernet, MTU: 1514, Speed: 1000mbps, Loopback: Disabled,
  Source filtering: Disabled, Flow control: Enabled
```



```

Device flags   : Present Running
Interface flags: SNMP-Traps Internal: 0x0
Link flags     : None

```

```

Logical interface xe-0/0/1.0
  Flags: SNMP-Traps Encapsulation: ENET2
  eth-switch

```

### show interfaces detail

```

user@switch> show interfaces xe-0/0/1 detail
Physical interface: xe-0/0/1, Enabled, Physical link is Up
  Interface index: 49195, SNMP ifIndex: 591, Generation: 169
  Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled,
  Flow control: Disabled
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x0
  Link flags     : None
  CoS queues     : 12 supported, 12 maximum usable queues
  Hold-times     : Up 0 ms, Down 0 ms
  Current address: 00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1
  Last flapped   : 2011-06-01 00:42:03 PDT (00:02:50 ago)
  Statistics last cleared: 2011-06-01 00:44:39 PDT (00:00:14 ago)
  Traffic statistics:
    Input bytes :          0          0 bps
    Output bytes:          0          0 bps
    Input packets:         0          0 pps
    Output packets:        0          0 pps
  IPv6 transit statistics:
    Input bytes :          0
    Output bytes:          0
    Input packets:         0
    Output packets:        0
  Egress queues: 12 supported, 9 in use
  Queue counters:

```

Queue counters:	Queued packets	Transmitted packets	Dropped packets
0 best-effort	0	0	0
1 fc7	0	0	0
2 no-loss	0	0	0
3 fcoe	0	0	0
4 fc4	0	0	0
5 fc5	0	0	0
6 fc6	0	0	0
7 network-cont	0	0	0
8 mcast	0	0	0

```

  Queue number:      Mapped forwarding classes
    0                best-effort
    1                fc7
    2                no-loss
    3                fcoe
    4                fc4
    5                fc5

```



```

6          fc6
7          network-control
8          mcast
Active alarms : None
Active defects : None

Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523) (Generation 143)
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
Traffic statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Local statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Transit statistics:
  Input bytes : 0 0 bps
  Output bytes : 0 0 bps
  Input packets: 0 0 pps
  Output packets: 0 0 pps
Protocol eth-switch, MTU: 0, Generation: 170, Route table: 0
Flags: Trunk-Mode

```

#### show interfaces detail (Asymmetric Flow Control)

```

user@switch> show interfaces xe-0/0/1 detail
Physical interface: xe-0/0/1, Enabled, Physical link is Up
  Interface index: 49195, SNMP ifIndex: 591, Generation: 169
  Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled,
  Configured-flow-control tx-buffers: off rx-buffers: on
  Device flags : Present Running
  Interface flags: SNMP-Traps Internal: 0x0
  Link flags : None
  CoS queues : 12 supported, 12 maximum usable queues
  Hold-times : Up 0 ms, Down 0 ms
  Current address: 00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1
  Last flapped : 2011-06-01 00:42:03 PDT (00:02:50 ago)
  Statistics last cleared: 2011-06-01 00:44:39 PDT (00:00:14 ago)
Traffic statistics:
  Input bytes : 0 0 bps
  Output bytes : 0 0 bps
  Input packets: 0 0 pps
  Output packets: 0 0 pps
IPv6 transit statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Egress queues: 12 supported, 9 in use
Queue counters:   Queued packets   Transmitted packets   Dropped packets

  0 best-effort           0           0           0

  1 fc7                   0           0           0

  2 no-loss                0           0           0

  3 fcoe                   0           0           0

```



4	fc4	0	0	0
5	fc5	0	0	0
6	fc6	0	0	0
7	network-cont	0	0	0
8	mcast	0	0	0

```

Queue number:      Mapped forwarding classes
0                  best-effort
1                  fc7
2                  no-loss
3                  fcoe
4                  fc4
5                  fc5
6                  fc6
7                  network-control
8                  mcast

```

```

Active alarms : None
Active defects : None

```

Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523) (Generation 143)

Flags: SNMP-Traps 0x0 Encapsulation: ENET2

Traffic statistics:

```

Input bytes :      0
Output bytes :     0
Input packets:     0
Output packets:    0

```

Local statistics:

```

Input bytes :      0
Output bytes :     0
Input packets:     0
Output packets:    0

```

Transit statistics:

```

Input bytes :      0          0 bps
Output bytes :     0          0 bps
Input packets:     0          0 pps
Output packets:    0          0 pps

```

Protocol eth-switch, MTU: 0, Generation: 170, Route table: 0

Flags: Trunk-Mode

## show interfaces extensive

```
user@switch> show interfaces xe-0/0/1 extensive
```

Physical interface: xe-0/0/1, Enabled, Physical link is Up

Interface index: 49195, SNMP ifIndex: 591, Generation: 169

Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU  
Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:  
Disabled,

Flow control: Disabled

Device flags : Present Running

Interface flags: SNMP-Traps Internal: 0x0

Link flags : None

CoS queues : 12 supported, 12 maximum usable queues

Hold-times : Up 0 ms, Down 0 ms

Current address: 00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1

Last flapped : 2011-06-01 00:42:03 PDT (00:03:08 ago)

Statistics last cleared: 2011-06-01 00:44:39 PDT (00:00:32 ago)

Traffic statistics:

```

Input bytes :      0          0 bps

```



```

Output bytes :                0                0 bps
Input packets:                0                0 pps
Output packets:               0                0 pps
IPv6 transit statistics:
  Input bytes :                0
  Output bytes :               0
  Input packets:               0
  Output packets:              0
Input errors:
  Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0, L3
incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0, FIFO errors: 0,
Resource errors: 0
Output errors:
  Carrier transitions: 0, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,
FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Egress queues: 12 supported, 9 in use
Queue counters:      Queued packets  Transmitted packets      Dropped packets

  0 best-effort                0                0                0
  1 fc7                        0                0                0
  2 no-loss                    0                0                0
  3 fcoe                        0                0                0
  4 fc4                         0                0                0
  5 fc5                         0                0                0
  6 fc6                         0                0                0
  7 network-cont               0                0                0
  8 mcast                      0                0                0

Queue number:      Mapped forwarding classes
  0                best-effort
  1                fc7
  2                no-loss
  3                fcoe
  4                fc4
  5                fc5
  6                fc6
  7                network-control
  8                mcast

Active alarms : None
Active defects : None
MAC statistics:
Total octets          Receive          Transmit
Total packets         0                0
Unicast packets       0                0
Broadcast packets     0                0
Multicast packets     0                0
CRC/Align errors      0                0
FIFO errors           0                0
MAC control frames    0                0
MAC pause frames      0                0
Oversized frames      0
Jabber frames         0
Fragment frames       0

```



```

VLAN tagged frames          0
Code violations              0
MAC Priority Flow Control Statistics:
  Priority : 0                0          0
  Priority : 1                0          0
  Priority : 2                0          0
  Priority : 3                0          0
  Priority : 4                0          0
  Priority : 5                0          0
  Priority : 6                0          0
  Priority : 7                0          0
Filter statistics:
  Input packet count          0
  Input packet rejects        0
  Input DA rejects            0
  Input SA rejects            0
  Output packet count         0
  Output packet pad count     0
  Output packet error count   0
CAM destination filters: 1, CAM source filters: 0
Packet Forwarding Engine configuration:
  Destination slot: 0
CoS information:
  Direction : Output
  CoS transmit queue          Bandwidth          Buffer Priority
Limit
    %          bps          %          usec          low
0 best-effort    75    7500000000    75          0
none
7 network-control 5     500000000     5          0    low
none
8 mcast          20    2000000000    20          0    low
none

Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523) (Generation 143)
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
Traffic statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Local statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Transit statistics:
  Input bytes : 0          0 bps
  Output bytes : 0          0 bps
  Input packets: 0          0 pps
  Output packets: 0          0 pps
Protocol eth-switch, MTU: 0, Generation: 170, Route table: 0
Flags: Trunk-Mode

```

### show interfaces extensive (Asymmetric Flow Control)

```

user@switch> show interfaces xe-0/0/1 extensive
Physical interface: xe-0/0/1, Enabled, Physical link is Up
  Interface index: 49195, SNMP ifIndex: 591, Generation: 169
  Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled,
  Configured-flow-control tx-buffers: off rx-buffers: on

```



```

Device flags      : Present Running
Interface flags:  SNMP-Traps Internal: 0x0
Link flags       : None
CoS queues       : 12 supported, 12 maximum usable queues
Hold-times       : Up 0 ms, Down 0 ms
Current address:  00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1
Last flapped     : 2011-06-01 00:42:03 PDT (00:03:08 ago)
Statistics last cleared: 2011-06-01 00:44:39 PDT (00:00:32 ago)
Traffic statistics:
  Input bytes      :                0                0 bps
  Output bytes     :                0                0 bps
  Input packets    :                0                0 pps
  Output packets   :                0                0 pps
IPv6 transit statistics:
  Input bytes      :                0
  Output bytes     :                0
  Input packets    :                0
  Output packets   :                0
Input errors:
  Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0, L3
incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0, FIFO errors: 0,
Resource errors: 0
Output errors:
  Carrier transitions: 0, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,
FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Egress queues: 12 supported, 9 in use
Queue counters:      Queued packets  Transmitted packets      Dropped packets

  0 best-effort              0                0                0
  1 fc7                      0                0                0
  2 no-loss                  0                0                0
  3 fcoe                     0                0                0
  4 fc4                      0                0                0
  5 fc5                      0                0                0
  6 fc6                      0                0                0
  7 network-cont             0                0                0
  8 mcast                    0                0                0

Queue number:      Mapped forwarding classes
  0                best-effort
  1                fc7
  2                no-loss
  3                fcoe
  4                fc4
  5                fc5
  6                fc6
  7                network-control
  8                mcast
Active alarms      : None
Active defects     : None
MAC statistics:
  Total octets      Receive      Transmit
  Total packets     0            0
                   0            0

```



```

Unicast packets          0          0
Broadcast packets        0          0
Multicast packets        0          0
CRC/Align errors         0          0
FIFO errors              0          0
MAC control frames       0          0
MAC pause frames         0          0
Oversized frames         0
Jabber frames            0
Fragment frames          0
VLAN tagged frames       0
Code violations           0
MAC Priority Flow Control Statistics:
  Priority : 0            0          0
  Priority : 1            0          0
  Priority : 2            0          0
  Priority : 3            0          0
  Priority : 4            0          0
  Priority : 5            0          0
  Priority : 6            0          0
  Priority : 7            0          0
Filter statistics:
  Input packet count      0
  Input packet rejects    0
  Input DA rejects        0
  Input SA rejects        0
  Output packet count     0
  Output packet pad count 0
  Output packet error count 0
  CAM destination filters: 1, CAM source filters: 0
Packet Forwarding Engine configuration:
  Destination slot: 0
CoS information:
  Direction : Output
  CoS transmit queue      %      Bandwidth      %      Buffer Priority Limit
                           %      bps              %      usec
0 best-effort             75      7500000000    75      0      low  none
7 network-control         5       500000000    5       0      low  none
8 mcast                   20      2000000000    20      0      low  none

Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523) (Generation 143)
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
Traffic statistics:
  Input bytes :          0
  Output bytes :          0
  Input packets:          0
  Output packets:          0
Local statistics:
  Input bytes :          0
  Output bytes :          0
  Input packets:          0
  Output packets:          0
Transit statistics:
  Input bytes :          0          0 bps
  Output bytes :          0          0 bps
  Input packets:          0          0 pps
  Output packets:          0          0 pps
Protocol eth-switch, MTU: 0, Generation: 170, Route table: 0
Flags: Trunk-Mode

```

```
user@switch> show interfaces xe-0/0/1 terse
```



**show interfaces terse**

Interface	Admin	Link	Proto	Local	Remote
xe-0/0/1	up	up			
xe-0/0/1.0	up	up	eth-switch		

**show interfaces  
(QFabric System)**

```
user@switch> show interfaces node1:xe-0/0/0
Physical interface: node1:xe-0/0/0, Enabled, Physical link is Down
  Interface index: 129, SNMP ifIndex: 2884086
  Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None,
  Loopback: Disabled, Source filtering: Disabled, Flow control: Enabled
  Interface flags: Internal: 0x4000
  CoS queues      : 8 supported, 8 maximum usable queues
  Current address: 02:00:09:03:00:00, Hardware address: 02:00:09:03:00:00
  Last flapped   : Never
  Input rate      : 0 bps (0 pps)
  Output rate     : 0 bps (0 pps)
```



## show interfaces xle

---

<b>Syntax</b>	<code>show interfaces <i>device-name:type-fpc/pic/port</i></code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;descriptions&gt;</code> <code>&lt;media&gt;</code> <code>&lt;routing-instance (all   <i>instance-name</i>)&gt;</code> <code>&lt;snmp-index <i>snmp-index</i>&gt;</code> <code>&lt;statistics&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display status information about the specified 10-Gigabit Ethernet interface. This command does not display statistics for routed VLAN interfaces.
<b>Options</b>	<p><b><i>device-name:type-fpc/pic/port</i></b>—(QFabric systems only) The device name is either the serial number or the alias of the QFabric system component, such as a Node device, Interconnect device, or QFabric infrastructure. The name must contain a maximum of 128 characters and not contain any colons.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>routing-instance (all   <i>instance-name</i>)</b>—(Optional) Display the name of an individual routing instance or display all routing instances.</p> <p><b>snmp-index <i>snmp-index</i></b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Monitoring Interface Status and Traffic on page 279</a></li><li>• <a href="#">Troubleshooting Network Interfaces on page 1106</a></li><li>• <a href="#">Troubleshooting an Aggregated Ethernet Interface on page 1107</a></li><li>• Junos® OS Network Interfaces</li></ul>
<b>List of Sample Output</b>	<a href="#">show interfaces on page 2293</a> <a href="#">show interfaces (Asymmetric Flow Control) on page 2293</a> <a href="#">show interfaces brief on page 2293</a> <a href="#">show interfaces detail on page 2294</a> <a href="#">show interfaces detail (Asymmetric Flow Control) on page 2295</a> <a href="#">show interfaces extensive on page 2296</a> <a href="#">show interfaces extensive (Asymmetric Flow Control) on page 2298</a>



[show interfaces terse on page 2300](#)

[show interfaces \(QFabric System\) on page 2301](#)

**Output Fields** Table 134 on page 1719 lists the output fields for the **show interfaces xe** command. Output fields are listed in the approximate order in which they appear.

**Table 175: show interfaces xe Output Fields**

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		
<b>Physical interface</b>	Name of the physical interface.	All levels
<b>Enabled</b>	State of the interface.	All levels
<b>Interface index</b>	Index number of the physical interface, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	SNMP index number for the physical interface.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Link-level type</b>	Encapsulation being used on the physical interface.	All levels
<b>MTU</b>	Maximum transmission unit size on the physical interface.	All levels
<b>Speed</b>	Speed at which the interface is running.	All levels
<b>Duplex</b>	Duplex mode of the interface, either <b>Full-Duplex</b> or <b>Half-Duplex</b> .	All levels
<b>Loopback</b>	Loopback status: <b>Enabled</b> or <b>Disabled</b> . If loopback is enabled, type of loopback: <b>Local</b> or <b>Remote</b> .	All levels
<b>Source filtering</b>	Source filtering status: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>LAN-PHY mode</b>	10-Gigabit Ethernet interface operating in Local Area Network Physical Layer Device (LAN PHY) mode. LAN PHY allows 10-Gigabit Ethernet wide area links to use existing Ethernet applications.	All levels
<b>Unidirectional</b>	Unidirectional link mode status for 10-Gigabit Ethernet interface: <b>Enabled</b> or <b>Disabled</b> for parent interface; <b>Rx-only</b> or <b>Tx-only</b> for child interfaces.	All levels
<b>Flow control</b>	Flow control status: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>NOTE:</b> This field is only displayed if asymmetric flow control is not configured.		



Table 175: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Configured-flow-control</b>	<p>Configured flow control for the interface transmit buffers (<b>tx-buffers</b>) and receive buffers (<b>rx-buffers</b>):</p> <ul style="list-style-type: none"> <li><b>tx-buffers</b>—<b>On</b> if the interface is configured to respond to Ethernet PAUSE messages received from the connected peer. <b>Off</b> if the interface is not configured to respond to received PAUSE messages.</li> <li><b>rx-buffers</b>—<b>On</b> if the interface is configured to generate and send Ethernet PAUSE messages to the connected peer. <b>Off</b> if the interface is not configured to generate and send PAUSE messages.</li> </ul> <p><b>NOTE:</b> This field is only displayed if asymmetric flow control is configured.</p>	All levels
<b>Auto-negotiation</b>	Autonegotiation status: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>Remote-fault</b>	<p>Remote fault status:</p> <ul style="list-style-type: none"> <li><b>Online</b>—Autonegotiation is manually configured as online.</li> <li><b>Offline</b>—Autonegotiation is manually configured as offline.</li> </ul>	All levels
<b>Device flags</b>	Information about the physical device.	All levels
<b>Interface flags</b>	Information about the interface.	All levels
<b>Link flags</b>	Information about the link.	All levels
<b>Wavelength</b>	Configured wavelength, in nanometers (nm).	All levels
<b>Frequency</b>	Frequency associated with the configured wavelength, in terahertz (THz).	All levels
<b>CoS queues</b>	Number of CoS queues configured.	<b>detail extensive none</b>
<b>Schedulers</b>	Number of CoS schedulers configured.	<b>extensive</b>
<b>Hold-times</b>	Current interface hold-time up and hold-time down, in milliseconds.	<b>detail extensive</b>
<b>Current address</b>	Configured MAC address.	<b>detail extensive none</b>
<b>Hardware address</b>	Hardware MAC address.	<b>detail extensive none</b>
<b>Last flapped</b>	Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: year-month-day hour:minute:second:timezone (hour:minute:second ago)</b> . For example, <b>Last flapped: 2008-01-16 10:52:40 UTC (3d 22:58 ago)</b> .	<b>detail extensive none</b>
<b>Input Rate</b>	Input rate in bits per second (bps) and packets per second (pps).	None specified
<b>Output Rate</b>	Output rate in bps and pps.	None specified
<b>Statistics last cleared</b>	Time when the statistics for the interface were last set to zero.	<b>detail extensive</b>



Table 175: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Traffic statistics</b>	<p>Number and rate of bytes and packets received and transmitted on the physical interface.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul> <p><b>NOTE:</b> The bandwidth bps counter is not enabled.</p>	<b>detail extensive</b>
<b>Input errors</b>	<p>Input errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Errors</b>—Sum of the incoming frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the input queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Framing errors</b>—Number of packets received with an invalid frame checksum (FCS).</li> <li>• <b>Runts</b>—Number of frames received that are smaller than the runt threshold.</li> <li>• <b>Policed discards</b>—Number of frames that the incoming packet match code discarded because they were not recognized or not of interest. Usually, this field reports protocols that Junos OS does not handle.</li> <li>• <b>L3 incompletes</b>—Number of incoming packets discarded because they failed Layer 3 sanity checks of the header. For example, a frame with less than 20 bytes of available IP header is discarded. L3 incomplete errors can be ignored if you configure the <b>ignore-l3-incompletes</b> statement.</li> <li>• <b>L2 channel errors</b>—Number of times the software did not find a valid logical interface for an incoming frame.</li> <li>• <b>L2 mismatch timeouts</b>—Number of malformed or short packets that caused the incoming packet handler to discard the frame as unreadable.</li> <li>• <b>FIFO errors</b>—Number of FIFO errors in the receive direction that are reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>



Table 175: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Output errors</b>	<p>Output errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Carrier transitions</b>—Number of times the interface has gone from <b>down</b> to <b>up</b>. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and then up, or another problem occurs. If the number of carrier transitions increments quickly (perhaps once every 10 seconds), the cable, the far-end system, or the PIC or PIM is malfunctioning.</li> <li>• <b>Errors</b>—Sum of the outgoing frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Collisions</b>—Number of Ethernet collisions. The Gigabit Ethernet PIC supports only full-duplex operation, so for Gigabit Ethernet PICs, this number should always remain 0. If it is nonzero, there is a software bug.</li> <li>• <b>Aged packets</b>—Number of packets that remained in shared packet SDRAM so long that the system automatically purged them. The value in this field should never increment. If it does, it is most likely a software bug or possibly malfunctioning hardware.</li> <li>• <b>FIFO errors</b>—Number of FIFO errors in the send direction as reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>• <b>HS link CRC errors</b>—Number of errors on the high-speed links between the ASICs responsible for handling the router interfaces.</li> <li>• <b>MTU errors</b>—Number of packets whose size exceeded the MTU of the interface.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>
<b>Egress queues</b>	Total number of egress queues supported on the specified interface.	<b>detail extensive</b>
<b>Queue counters (Egress)</b>	<p>CoS queue number and its associated user-configured forwarding class name.</p> <ul style="list-style-type: none"> <li>• <b>Queued packets</b>—Number of queued packets.</li> <li>• <b>Transmitted packets</b>—Number of transmitted packets.</li> <li>• <b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>	<b>detail extensive</b>
<b>Queue Number</b>	The CoS queue number and the forwarding classes mapped to the queue number. The <b>Mapped forwarding class</b> column lists the forwarding classes mapped to each CoS queue.	<b>detail extensive</b>
<b>Ingress queues</b>	Total number of ingress queues supported on the specified interface.	<b>extensive</b>
<b>Queue counters (Ingress)</b>	<p>CoS queue number and its associated user-configured forwarding class name.</p> <ul style="list-style-type: none"> <li>• <b>Queued packets</b>—Number of queued packets.</li> <li>• <b>Transmitted packets</b>—Number of transmitted packets.</li> <li>• <b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>	<b>extensive</b>



Table 175: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Active alarms and Active defects</b>	<p>Ethernet-specific defects that can prevent the interface from passing packets. When a defect persists for a certain amount of time, it is promoted to an alarm. Based on the switch configuration, an alarm can ring the red or yellow alarm bell on the switch, or turn on the red or yellow alarm LED on the craft interface. These fields can contain the value <b>None</b> or <b>Link</b>.</p> <ul style="list-style-type: none"> <li>• <b>None</b>—There are no active defects or alarms.</li> <li>• <b>Link</b>—Interface has lost its link state, which usually means that the cable is unplugged, the far-end system has been turned off, or the PIC is malfunctioning.</li> </ul>	<b>detail extensive none</b>
<b>PCS statistics</b>	Physical Coding Sublayer (PCS) fault conditions from the LAN PHY device.	<b>detail extensive</b>
<b>MAC statistics</b>	<p>Receive and Transmit statistics reported by the PIC's MAC subsystem.</p> <ul style="list-style-type: none"> <li>• <b>Total octets and total packets</b>—Total number of octets and packets. For Gigabit Ethernet IQ PICs, the received octets count varies by interface type.</li> <li>• <b>Unicast packets, Broadcast packets, and Multicast packets</b>—Number of unicast, broadcast, and multicast packets.</li> <li>• <b>CRC/Align errors</b>—Total number of packets received that had a length (excluding framing bits, but including FCS octets) of between 64 and 1518 octets, inclusive, and had either a bad FCS with an integral number of octets (FCS Error) or a bad FCS with a nonintegral number of octets (Alignment Error).</li> <li>• <b>FIFO error</b>—Number of FIFO errors that are reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>• <b>MAC control frames</b>—Number of MAC control frames.</li> <li>• <b>MAC pause frames</b>—Number of MAC control frames with <b>pause</b> operational code.</li> <li>• <b>Oversized frames</b>—Number of packets that exceeds the configured MTU.</li> <li>• <b>Jabber frames</b>—Number of frames that were longer than 1518 octets (excluding framing bits, but including FCS octets), and had either an FCS error or an alignment error. This definition of jabber is different from the definition in IEEE-802.3 section 8.2.1.5 (10BASE5) and section 10.3.1.4 (10BASE2). These documents define jabber as the condition in which any packet exceeds 20 ms. The allowed range to detect jabber is from 20 ms to 150 ms.</li> <li>• <b>Fragment frames</b>—Total number of packets that were less than 64 octets in length (excluding framing bits, but including FCS octets), and had either an FCS error or an alignment error. Fragment frames normally increment because both runs (which are normal occurrences caused by collisions) and noise hits are counted.</li> <li>• <b>VLAN tagged frames</b>—Number of frames that are VLAN tagged. The system uses the TPID of 0x8100 in the frame to determine whether a frame is tagged or not. This counter is not supported on EX Series switches and is always displayed as 0.</li> <li>• <b>Code violations</b>—Number of times an event caused the PHY to indicate "Data reception error" or "invalid data symbol error."</li> </ul>	<b>extensive</b>
<b>Filter statistics</b>	Receive and Transmit statistics reported by the PIC's MAC address filter subsystem.	<b>extensive</b>



Table 175: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
Autonegotiation information	<p>Information about link autonegotiation.</p> <ul style="list-style-type: none"> <li>• <b>Negotiation status:</b> <ul style="list-style-type: none"> <li>• <b>Incomplete</b>—Ethernet interface has the speed or link mode configured.</li> <li>• <b>No autonegotiation</b>—Remote Ethernet interface has the speed or link mode configured, or does not perform autonegotiation.</li> <li>• <b>Complete</b>—Ethernet interface is connected to a device that performs autonegotiation and the autonegotiation process is successful.</li> </ul> </li> <li>• <b>Link partner status</b>—OK when the Ethernet interface is connected to a device that performs autonegotiation and the autonegotiation process is successful.</li> <li>• <b>Link partner:</b> <ul style="list-style-type: none"> <li>• <b>Link mode</b>—Depending on the capability of the attached Ethernet device, either <b>Full-duplex</b> or <b>Half-duplex</b>.</li> <li>• <b>Flow control</b>—Types of flow control supported by the remote Ethernet device. For Fast Ethernet interfaces, the type is <b>None</b>. For Gigabit Ethernet interfaces, types are <b>Symmetric</b> (link partner supports <b>PAUSE</b> on receive and transmit), <b>Asymmetric</b> (link partner supports <b>PAUSE</b> on transmit), and <b>Symmetric/Asymmetric</b> (link partner supports both <b>PAUSE</b> on receive and transmit or only <b>PAUSE</b> receive).</li> <li>• <b>Remote fault</b>—Remote fault information from the link partner—<b>Failure</b> indicates a receive link error. <b>OK</b> indicates that the link partner is receiving. <b>Negotiation error</b> indicates a negotiation error. <b>Offline</b> indicates that the link partner is going offline.</li> </ul> </li> <li>• <b>Local resolution:</b> <ul style="list-style-type: none"> <li>• <b>Flow control</b>—Types of flow control supported by the remote Ethernet device. For Gigabit Ethernet interfaces, types are <b>Symmetric</b> (link partner supports <b>PAUSE</b> on receive and transmit), <b>Asymmetric</b> (link partner supports <b>PAUSE</b> on transmit), and <b>Symmetric/Asymmetric</b> (link partner supports both <b>PAUSE</b> on receive and transmit or only <b>PAUSE</b> receive). For asymmetric <b>PAUSE</b>, shows if the <b>PAUSE</b> transmit and <b>PAUSE</b> receive states on the interface are <b>enable</b> or <b>disable</b>.</li> <li>• <b>Remote fault</b>—Remote fault information. <b>Link OK</b> (no error detected on receive), <b>Offline</b> (local interface is offline), and <b>Link Failure</b> (link error detected on receive).</li> </ul> </li> </ul>	extensive



Table 175: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Packet Forwarding Engine configuration</b>	Information about the configuration of the Packet Forwarding Engine: <ul style="list-style-type: none"> <li>• <b>Destination slot</b>—FPC slot number.</li> <li>• <b>CoS transmit queue</b>—Queue number and its associated user-configured forwarding class name.</li> <li>• <b>Bandwidth %</b>—Percentage of bandwidth allocated to the queue.</li> <li>• <b>Bandwidth bps</b>—Bandwidth allocated to the queue (in bps).</li> <li>• <b>Buffer %</b>—Percentage of buffer space allocated to the queue.</li> <li>• <b>Buffer usec</b>—Amount of buffer space allocated to the queue, in microseconds. This value is nonzero only if the buffer size is configured in terms of time.</li> <li>• <b>Priority</b>—Queue priority: <b>low</b> or <b>high</b>.</li> <li>• <b>Limit</b>—Displayed if rate limiting is configured for the queue. Possible values are <b>none</b> and <b>exact</b>. If <b>exact</b> is configured, the queue transmits only up to the configured bandwidth, even if excess bandwidth is available. If <b>none</b> is configured, the queue transmits beyond the configured bandwidth if bandwidth is available.</li> </ul>	<b>extensive</b>
<b>Logical Interface</b>		
<b>Logical interface</b>	Name of the logical interface.	All levels
<b>Index</b>	Index number of the logical interface, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	SNMP interface index number for the logical interface.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Flags</b>	Information about the logical interface.	All levels
<b>Encapsulation</b>	Encapsulation on the logical interface.	All levels
<b>Protocol</b>	Protocol family.	<b>detail extensive none</b>
<b>Traffic statistics</b>	Number and rate of bytes and packets received (input) and transmitted (output) on the specified interface.	<b>detail extensive</b>
<b>IPv6 transit statistics</b>	If IPv6 statics tracking is enabled, number of IPv6 bytes and packets received and transmitted on the logical interface.	<b>extensive</b>
<b>Local statistics</b>	Number and rate of bytes and packets destined to and from the switch.	<b>extensive</b>
<b>Transit statistics</b>	Number and rate of bytes and packets transiting the switch.	<b>extensive</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Route Table</b>	Route table in which the logical interface address is located. For example, <b>0</b> refers to the routing table inet.0.	<b>detail extensive none</b>



Table 175: show interfaces xe Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Input Filters</b>	Names of any input filters applied to this interface.	<b>detail extensive</b>
<b>Output Filters</b>	Names of any output filters applied to this interface.	<b>detail extensive</b>
<b>Flags</b>	Information about protocol family flags.  If unicast Reverse Path Forwarding (uRPF) is explicitly configured on the specified interface, the uRPF flag appears. If uRPF was configured on a different interface (and therefore is enabled on all switch interfaces) but was not explicitly configured on the specified interface, the uRPF flag does not appear even though uRPF is enabled.	<b>detail extensive</b>
<b>Addresses, Flags</b>	Information about the address flags.	<b>detail extensive none</b>
<i>protocol-family</i>	Protocol family configured on the logical interface. If the protocol is <b>inet</b> , the IP address of the interface is also displayed.	<b>brief</b>
<b>Flags</b>	Information about the address flag.	<b>detail extensive none</b>
<b>Destination</b>	IP address of the remote side of the connection.	<b>detail extensive none</b>
<b>Local</b>	IP address of the logical interface.	<b>detail extensive none</b>
<b>Broadcast</b>	Broadcast address of the logical interlace.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>



## Sample Output

### show interfaces

```
user@switch> show interfaces xe-0/0/1
Physical interface: xe-0/0/1, Enabled, Physical link is Up
  Interface index: 49195, SNMP ifIndex: 591
  Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled,
  Flow control: Disabled
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x0
  Link flags     : None
  CoS queues     : 12 supported, 12 maximum usable queues
  Current address: 00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1
  Last flapped   : 2011-06-01 00:42:03 PDT (00:02:42 ago)
  Input rate     : 0 bps (0 pps)
  Output rate    : 0 bps (0 pps)
  Active alarms  : None
  Active defects : None

Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523)
  Flags: SNMP-Traps 0x0 Encapsulation: ENET2
  Input packets : 0
  Output packets: 0
  Protocol eth-switch, MTU: 0
  Flags: Trunk-Mode
```

### show interfaces (Asymmetric Flow Control)

```
user@switch> show interfaces xe-0/0/1
Physical interface: xe-0/0/1, Enabled, Physical link is Up
  Interface index: 49195, SNMP ifIndex: 591
  Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled,
  Configured-flow-control tx-buffers: off rx-buffers: on
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x0
  Link flags     : None
  CoS queues     : 12 supported, 12 maximum usable queues
  Current address: 00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1
  Last flapped   : 2011-06-01 00:42:03 PDT (00:02:42 ago)
  Input rate     : 0 bps (0 pps)
  Output rate    : 0 bps (0 pps)
  Active alarms  : None
  Active defects : None

Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523)
  Flags: SNMP-Traps 0x0 Encapsulation: ENET2
  Input packets : 0
  Output packets: 0
  Protocol eth-switch, MTU: 0
  Flags: Trunk-Mode
```

### show interfaces brief

```
user@switch> show interfaces xe-0/0/1 brief
Physical interface: xe-0/0/1, Enabled, Physical link is Up
  Link-level type: Ethernet, MTU: 1514, Speed: 1000mbps, Loopback: Disabled,
  Source filtering: Disabled, Flow control: Enabled
```



```

Device flags   : Present Running
Interface flags: SNMP-Traps Internal: 0x0
Link flags     : None

```

```

Logical interface xe-0/0/1.0
  Flags: SNMP-Traps Encapsulation: ENET2
  eth-switch

```

## show interfaces detail

```

user@switch> show interfaces xe-0/0/1 detail
Physical interface: xe-0/0/1, Enabled, Physical link is Up
  Interface index: 49195, SNMP ifIndex: 591, Generation: 169
  Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled,
  Flow control: Disabled
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x0
  Link flags     : None
  CoS queues     : 12 supported, 12 maximum usable queues
  Hold-times     : Up 0 ms, Down 0 ms
  Current address: 00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1
  Last flapped   : 2011-06-01 00:42:03 PDT (00:02:50 ago)
  Statistics last cleared: 2011-06-01 00:44:39 PDT (00:00:14 ago)
  Traffic statistics:
    Input bytes :                0                0 bps
    Output bytes :                0                0 bps
    Input packets:                0                0 pps
    Output packets:                0                0 pps
  IPv6 transit statistics:
    Input bytes :                0
    Output bytes :                0
    Input packets:                0
    Output packets:                0
  Egress queues: 12 supported, 9 in use
  Queue counters:

```

Queue counters:	Queued packets	Transmitted packets	Dropped packets
0 best-effort	0	0	0
1 fc7	0	0	0
2 no-loss	0	0	0
3 fcoe	0	0	0
4 fc4	0	0	0
5 fc5	0	0	0
6 fc6	0	0	0
7 network-cont	0	0	0
8 mcast	0	0	0

```

  Queue number:      Mapped forwarding classes
    0                best-effort
    1                fc7
    2                no-loss
    3                fcoe
    4                fc4
    5                fc5

```



```

6          fc6
7          network-control
8          mcast
Active alarms : None
Active defects : None

Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523) (Generation 143)
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
Traffic statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Local statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Transit statistics:
  Input bytes : 0 0 bps
  Output bytes : 0 0 bps
  Input packets: 0 0 pps
  Output packets: 0 0 pps
Protocol eth-switch, MTU: 0, Generation: 170, Route table: 0
Flags: Trunk-Mode

```

#### show interfaces detail (Asymmetric Flow Control)

```

user@switch> show interfaces xe-0/0/1 detail
Physical interface: xe-0/0/1, Enabled, Physical link is Up
Interface index: 49195, SNMP ifIndex: 591, Generation: 169
Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
Disabled,
Configured-flow-control tx-buffers: off rx-buffers: on
Device flags : Present Running
Interface flags: SNMP-Traps Internal: 0x0
Link flags : None
CoS queues : 12 supported, 12 maximum usable queues
Hold-times : Up 0 ms, Down 0 ms
Current address: 00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1
Last flapped : 2011-06-01 00:42:03 PDT (00:02:50 ago)
Statistics last cleared: 2011-06-01 00:44:39 PDT (00:00:14 ago)
Traffic statistics:
  Input bytes : 0 0 bps
  Output bytes : 0 0 bps
  Input packets: 0 0 pps
  Output packets: 0 0 pps
IPv6 transit statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Egress queues: 12 supported, 9 in use
Queue counters:   Queued packets   Transmitted packets   Dropped packets

0 best-effort      0              0              0

1 fc7              0              0              0

2 no-loss          0              0              0

3 fcoe             0              0              0

```



4	fc4	0	0	0
5	fc5	0	0	0
6	fc6	0	0	0
7	network-cont	0	0	0
8	mcast	0	0	0

```

Queue number:      Mapped forwarding classes
0                  best-effort
1                  fc7
2                  no-loss
3                  fcoe
4                  fc4
5                  fc5
6                  fc6
7                  network-control
8                  mcast

```

```

Active alarms : None
Active defects : None

```

Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523) (Generation 143)

Flags: SNMP-Traps 0x0 Encapsulation: ENET2

Traffic statistics:

```

Input bytes :      0
Output bytes :     0
Input packets:     0
Output packets:    0

```

Local statistics:

```

Input bytes :      0
Output bytes :     0
Input packets:     0
Output packets:    0

```

Transit statistics:

```

Input bytes :      0          0 bps
Output bytes :     0          0 bps
Input packets:     0          0 pps
Output packets:    0          0 pps

```

Protocol eth-switch, MTU: 0, Generation: 170, Route table: 0

Flags: Trunk-Mode

## show interfaces extensive

```
user@switch> show interfaces xe-0/0/1 extensive
```

Physical interface: xe-0/0/1, Enabled, Physical link is Up

Interface index: 49195, SNMP ifIndex: 591, Generation: 169

Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU

Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:  
Disabled,

Flow control: Disabled

Device flags : Present Running

Interface flags: SNMP-Traps Internal: 0x0

Link flags : None

CoS queues : 12 supported, 12 maximum usable queues

Hold-times : Up 0 ms, Down 0 ms

Current address: 00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1

Last flapped : 2011-06-01 00:42:03 PDT (00:03:08 ago)

Statistics last cleared: 2011-06-01 00:44:39 PDT (00:00:32 ago)

Traffic statistics:

```

Input bytes :      0          0 bps

```



```

Output bytes :                0                0 bps
Input packets:                0                0 pps
Output packets:              0                0 pps
IPv6 transit statistics:
  Input bytes :                0
  Output bytes :              0
  Input packets:              0
  Output packets:            0
Input errors:
  Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0, L3
incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0, FIFO errors: 0,
Resource errors: 0
Output errors:
  Carrier transitions: 0, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,
FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Egress queues: 12 supported, 9 in use
Queue counters:      Queued packets  Transmitted packets      Dropped packets

  0 best-effort                0                0                0
  1 fc7                        0                0                0
  2 no-loss                    0                0                0
  3 fcoe                       0                0                0
  4 fc4                        0                0                0
  5 fc5                        0                0                0
  6 fc6                        0                0                0
  7 network-cont               0                0                0
  8 mcast                      0                0                0

Queue number:      Mapped forwarding classes
  0                best-effort
  1                fc7
  2                no-loss
  3                fcoe
  4                fc4
  5                fc5
  6                fc6
  7                network-control
  8                mcast
Active alarms : None
Active defects : None
MAC statistics:
Total octets              Receive      Transmit
Total packets            0                0
Unicast packets          0                0
Broadcast packets        0                0
Multicast packets        0                0
CRC/Align errors         0                0
FIFO errors              0                0
MAC control frames       0                0
MAC pause frames         0                0
Oversized frames         0
Jabber frames            0
Fragment frames          0

```



```

VLAN tagged frames          0
Code violations              0
MAC Priority Flow Control Statistics:
  Priority : 0                0          0
  Priority : 1                0          0
  Priority : 2                0          0
  Priority : 3                0          0
  Priority : 4                0          0
  Priority : 5                0          0
  Priority : 6                0          0
  Priority : 7                0          0
Filter statistics:
  Input packet count          0
  Input packet rejects        0
  Input DA rejects            0
  Input SA rejects            0
  Output packet count         0
  Output packet pad count     0
  Output packet error count   0
CAM destination filters: 1, CAM source filters: 0
Packet Forwarding Engine configuration:
  Destination slot: 0
CoS information:
  Direction : Output
  CoS transmit queue          Bandwidth          Buffer Priority
Limit
    0 best-effort             75      75000000000    75          0      low
none
    7 network-control         5       500000000     5          0      low
none
    8 mcast                   20     20000000000    20          0      low
none

Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523) (Generation 143)
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
Traffic statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Local statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Transit statistics:
  Input bytes : 0          0 bps
  Output bytes : 0         0 bps
  Input packets: 0         0 pps
  Output packets: 0        0 pps
Protocol eth-switch, MTU: 0, Generation: 170, Route table: 0
Flags: Trunk-Mode

```

### show interfaces extensive (Asymmetric Flow Control)

```

user@switch> show interfaces xe-0/0/1 extensive
Physical interface: xe-0/0/1, Enabled, Physical link is Up
  Interface index: 49195, SNMP ifIndex: 591, Generation: 169
  Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering:
  Disabled,
  Configured-flow-control tx-buffers: off rx-buffers: on

```



```

Device flags      : Present Running
Interface flags:  SNMP-Traps Internal: 0x0
Link flags       : None
CoS queues       : 12 supported, 12 maximum usable queues
Hold-times       : Up 0 ms, Down 0 ms
Current address:  00:1d:b5:f7:4e:e1, Hardware address: 00:1d:b5:f7:4e:e1
Last flapped     : 2011-06-01 00:42:03 PDT (00:03:08 ago)
Statistics last cleared: 2011-06-01 00:44:39 PDT (00:00:32 ago)
Traffic statistics:
  Input bytes      :                0                0 bps
  Output bytes     :                0                0 bps
  Input packets    :                0                0 pps
  Output packets   :                0                0 pps
IPv6 transit statistics:
  Input bytes      :                0
  Output bytes     :                0
  Input packets    :                0
  Output packets   :                0
Input errors:
  Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0, L3
incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0, FIFO errors: 0,
Resource errors: 0
Output errors:
  Carrier transitions: 0, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,
FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Egress queues: 12 supported, 9 in use
Queue counters:
  Queued packets  Transmitted packets  Dropped packets

  0 best-effort           0                0                0
  1 fc7                  0                0                0
  2 no-loss               0                0                0
  3 fcoe                  0                0                0
  4 fc4                   0                0                0
  5 fc5                   0                0                0
  6 fc6                   0                0                0
  7 network-cont         0                0                0
  8 mcast                 0                0                0

Queue number:           Mapped forwarding classes
  0                     best-effort
  1                     fc7
  2                     no-loss
  3                     fcoe
  4                     fc4
  5                     fc5
  6                     fc6
  7                     network-control
  8                     mcast
Active alarms : None
Active defects : None
MAC statistics:
  Total octets           Receive          Transmit
  Total packets          0              0
                        0              0

```



```

Unicast packets          0          0
Broadcast packets        0          0
Multicast packets        0          0
CRC/Align errors         0          0
FIFO errors              0          0
MAC control frames       0          0
MAC pause frames         0          0
Oversized frames         0
Jabber frames            0
Fragment frames          0
VLAN tagged frames       0
Code violations           0
MAC Priority Flow Control Statistics:
  Priority : 0            0          0
  Priority : 1            0          0
  Priority : 2            0          0
  Priority : 3            0          0
  Priority : 4            0          0
  Priority : 5            0          0
  Priority : 6            0          0
  Priority : 7            0          0
Filter statistics:
  Input packet count      0
  Input packet rejects    0
  Input DA rejects        0
  Input SA rejects        0
  Output packet count     0
  Output packet pad count 0
  Output packet error count 0
  CAM destination filters: 1, CAM source filters: 0
Packet Forwarding Engine configuration:
  Destination slot: 0
CoS information:
  Direction : Output
  CoS transmit queue      %      Bandwidth      %      Buffer Priority Limit
                           %      bps              %      usec
0 best-effort             75      7500000000    75      0      low  none
7 network-control         5       500000000     5       0      low  none
8 mcast                   20      2000000000    20      0      low  none

Logical interface xe-0/0/1.0 (Index 73) (SNMP ifIndex 523) (Generation 143)
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
Traffic statistics:
  Input bytes :          0
  Output bytes :          0
  Input packets:          0
  Output packets:          0
Local statistics:
  Input bytes :          0
  Output bytes :          0
  Input packets:          0
  Output packets:          0
Transit statistics:
  Input bytes :          0          0 bps
  Output bytes :          0          0 bps
  Input packets:          0          0 pps
  Output packets:          0          0 pps
Protocol eth-switch, MTU: 0, Generation: 170, Route table: 0
Flags: Trunk-Mode

```

```
user@switch> show interfaces xe-0/0/1 terse
```



**show interfaces terse**

Interface	Admin	Link	Proto	Local	Remote
xe-0/0/1	up	up			
xe-0/0/1.0	up	up	eth-switch		

**show interfaces  
(QFabric System)**

```
user@switch> show interfaces node1:xe-0/0/0
Physical interface: node1:xe-0/0/0, Enabled, Physical link is Down
  Interface index: 129, SNMP ifIndex: 2884086
  Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Duplex: Full-Duplex, BPDU
  Error: None, MAC-REWRITE Error: None,
  Loopback: Disabled, Source filtering: Disabled, Flow control: Enabled
  Interface flags: Internal: 0x4000
  CoS queues      : 8 supported, 8 maximum usable queues
  Current address: 02:00:09:03:00:00, Hardware address: 02:00:09:03:00:00
  Last flapped   : Never
  Input rate      : 0 bps (0 pps)
  Output rate     : 0 bps (0 pps)
```



## show lacp interfaces

---

<b>Syntax</b>	<code>show lacp interfaces</code> <code>&lt;interface-name&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 10.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Link Aggregation Control Protocol (LACP) information about the specified aggregated Ethernet or Gigabit Ethernet interface.
<b>Options</b>	none—Display LACP information for all interfaces.  <i>interface-name</i> —(Optional) Display LACP information for the specified interface: <ul style="list-style-type: none"><li>• Aggregated Ethernet—<i>aex</i></li><li>• Gigabit Ethernet—<i>ge-fpc/pic/port</i></li><li>• 10-Gigabit Ethernet—<i>xe-fpc/pic/port</i></li></ul>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Configuring Aggregated Ethernet High-Speed Uplinks Between an EX4200 Virtual Chassis Access Switch and an EX4200 Virtual Chassis Distribution Switch</li><li>• Example: Configuring Aggregated Ethernet High-Speed Uplinks with LACP Between an EX4200 Virtual Chassis Access Switch and an EX4200 Virtual Chassis Distribution Switch</li><li>• <a href="#">Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch on page 1950</a></li><li>• Configuring Aggregated Ethernet Links (CLI Procedure)</li><li>• <a href="#">Configuring Link Aggregation on page 2033</a></li><li>• Configuring Aggregated Ethernet LACP (CLI Procedure)</li><li>• <a href="#">Configuring Aggregated Ethernet LACP on page 2030</a></li><li>• Configuring LACP Link Protection of Aggregated Ethernet Interfaces (CLI Procedure)</li><li>• Understanding Aggregated Ethernet Interfaces and LACP</li><li>• <a href="#">Understanding Aggregated Ethernet Interfaces and LACP on page 1913</a></li><li>• <a href="#">Junos OS Interfaces Fundamentals Configuration Guide</a></li></ul>
<b>List of Sample Output</b>	<a href="#">show lacp interfaces (EX Series Switches) on page 2305</a> <a href="#">show lacp interfaces (QFX Series) on page 2305</a>
<b>Output Fields</b>	<a href="#">Table 164 on page 2137</a> lists the output fields for the <code>show lacp interfaces</code> command. Output fields are listed in the approximate order in which they appear.



Table 176: show lacp interfaces Output Fields

Field Name	Field Description
Aggregated interface	Aggregated Ethernet interface name.
LACP State	<p>LACP state information for each aggregated Ethernet interface:</p> <ul style="list-style-type: none"> <li>For a child interface configured with the <b>force-up</b> statement, LACP state displays <b>FUP</b> along with the interface name.</li> <li><b>Role</b>—Role played by the interface. It can be one of the following: <ul style="list-style-type: none"> <li><b>Actor</b>—Local device participating in the LACP negotiation.</li> <li><b>Partner</b>—Remote device participating in the LACP negotiation.</li> </ul> </li> <li><b>Exp</b>—Expired state. <b>Yes</b> indicates that the actor or partner is in an expired state. <b>No</b> indicates that the actor or partner is not in an expired state.</li> <li><b>Def</b>—Default. <b>Yes</b> indicates that the actor's receive machine is using the default operational partner information, which is administratively configured for the partner. <b>No</b> indicates that the operational partner information in use has been received in an LACP PDU.</li> <li><b>Dist</b>—Distribution of outgoing frames. <b>No</b> indicates that the distribution of outgoing frames on the link is currently disabled and is not expected to be enabled. Otherwise, the value is <b>Yes</b>.</li> <li><b>Col</b>—Collection of incoming frames. <b>Yes</b> indicates that the collection of incoming frames on the link is currently enabled and is not expected to be disabled. Otherwise, the value is <b>No</b>.</li> <li><b>Syn</b>—Synchronization. If the value is <b>Yes</b>, the link is considered to be synchronized. The link has been allocated to the correct link aggregation group, the group has been associated with a compatible aggregator, and the identity of the link aggregation group is consistent with the system ID and operational key information transmitted. If the value is <b>No</b>, the link is not synchronized. The link is currently not in the right aggregation.</li> <li><b>Aggr</b>—Ability of the aggregation port to aggregate (<b>Yes</b>) or to operate only as an individual link (<b>No</b>).</li> <li><b>Timeout</b>—LACP timeout preference. Periodic transmissions of LACP PDUs occur at either a slow or a fast transmission rate, depending upon the expressed LACP timeout preference (<b>Long Timeout</b> or <b>Short Timeout</b>).</li> <li><b>Activity</b>—Actor's or partner's port activity. <b>Passive</b> indicates the port's preference for not transmitting LAC PDUs unless its partner's control value is <b>Active</b>. <b>Active</b> indicates the port's preference to participate in the protocol regardless of the partner's control value.</li> </ul>



Table 176: show lacp interfaces Output Fields (*continued*)

Field Name	Field Description
LACP Protocol	<p>LACP protocol information for each aggregated interface:</p> <ul style="list-style-type: none"> <li>Link state (active or standby) indicated in parentheses next to the interface when link protection is configured.</li> <li><b>Receive State</b>—One of the following values: <ul style="list-style-type: none"> <li><b>Current</b>—The state machine receives an LACP PDU and enters the <b>Current</b> state.</li> <li><b>Defaulted</b>—If no LACP PDU is received before the timer for the <b>Current</b> state expires a second time, the state machine enters the <b>Defaulted</b> state.</li> <li><b>Expired</b>—If no LACP PDU is received before the timer for the <b>Current</b> state expires once, the state machine enters the <b>Expired</b> state.</li> <li><b>Initialize</b>—When the physical connectivity of a link changes or a Begin event occurs, the state machine enters the <b>Initialize</b> state.</li> <li><b>LACP Disabled</b>—If the port is operating in half duplex, the operation of LACP is disabled on the port, forcing the state to <b>LACP Disabled</b>. This state is similar to the <b>Defaulted</b> state, except that the port is forced to operate as an individual port.</li> <li><b>Port Disabled</b>—If the port becomes inoperable and a Begin event has not occurred, the state machine enters the <b>Port Disabled</b> state.</li> </ul> </li> <li><b>Transmit State</b>—Transmit state of the state machine. The transmit state is one of the following values: <ul style="list-style-type: none"> <li><b>Fast periodic</b>—Periodic transmissions are enabled at a fast transmission rate.</li> <li><b>No periodic</b>—Periodic transmissions are disabled.</li> <li><b>Periodic timer</b>—Transitory state entered when the periodic timer expires.</li> <li><b>Slow periodic</b>—Periodic transmissions are enabled at a slow transmission rate.</li> </ul> </li> <li><b>Mux State</b>—State of the multiplexer state machine for the aggregation port. The state is one of the following values: <ul style="list-style-type: none"> <li><b>Attached</b>—The multiplexer state machine initiates the process of attaching the port to the selected aggregator.</li> <li><b>Collecting—Yes</b> indicates that the receive function of this link is enabled with respect to its participation in an aggregation. Received frames are passed to the aggregator for collection. <b>No</b> indicates the receive function of this link is not enabled.</li> <li><b>Collecting distributing</b>—Collecting and distributing states are merged together to form a combined state (coupled control). Because independent control is not possible, the coupled control state machine does not wait for the partner to signal that collection has started before enabling both collection and distribution.</li> <li><b>Detached</b>—Process of detaching the port from the aggregator is in progress.</li> <li><b>Distributing—Yes</b> indicates that the transmit function of this link is enabled with respect to its participation in an aggregation. Frames can be passed down from the aggregator's distribution function for transmission. <b>No</b> indicates the transmit function of this link is not enabled.</li> <li><b>Waiting</b>—The multiplexer state machine is in a holding process, awaiting an outcome.</li> </ul> </li> </ul>



## Sample Output

### show lacp interfaces (EX Series Switches)

```

user@switch> show lacp interfaces ae5
Aggregated interface: ae5
  LACP state:      Role  Exp  Def  Dist  Col  Syn  Aggr  Timeout  Activity
    xe-2/0/7      Actor  No   No   Yes   Yes  Yes   Yes   Fast    Active
    xe-2/0/7      Partner No   No   Yes   Yes  Yes   Yes   Fast    Passive

    xe-4/0/7      Actor  No   No   No    No   No    Yes   Fast    Active
    xe-4/0/7      Partner No   No   No    Yes  Yes   Yes   Fast    Passive

  LACP protocol:      Receive State  Transmit State      Mux State
    xe-2/0/7(Active)    Current    Fast periodic Collecting distributing
    xe-34/0/7(Standby) Current    Fast periodic      Waiting

```

### show lacp interfaces (QFX Series)

```

user@switch> show lacp interfaces nodegroup1:ae0 extensive
Aggregated interface: nodegroup1:ae0
  LACP state:      Role  Exp  Def  Dist  Col  Syn  Aggr  Timeout  Activity
    node1:xe-0/0/1FUP Actor  No   Yes   No    No   No    No    Yes    Fast
Active
    node1xe-0/0/1FUP Partner No   Yes   No    No   No    No    Yes    Fast
Passive
    node2:xe-0/0/2    Actor  No   Yes   No    No   No    No    Yes    Fast
Active
    node2:xe-0/0/2    Partner No   Yes   No    No   No    No    Yes    Fast
Passive

```



	LACP protocol:	Receive State	Transmit State	Mux State
	node1:xe-0/0/1FUP	Current	Fast periodic	Collecting
distributing				
	node2:xe-0/0/2	Current	Fast periodic	Collecting
distributing				
	node1:xe-0/0/1 (active)	Current	Fast periodic	Collecting
distributing				
	node2:xe-0/0/2 (standby)	Current	Fast periodic	WAITING



## show lacp statistics interfaces (View)

<b>Syntax</b>	<code>show lacp statistics interfaces <i>interface-name</i></code>
<b>Release Information</b>	Command modified in Release 10.2 of Junos OS. Command introduced in Release 11.1 of Junos OS for the QFX Series.
<b>Description</b>	Display Link Aggregation Control Protocol (LACP) statistics about the specified aggregated Ethernet interface or redundant Ethernet interface. If you do not specify an interface name, LACP statistics for all interfaces are displayed.
<b>Options</b>	<i>interface-name</i> —(Optional) Name of an interface.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Link Aggregation on page 2033</a></li> <li>• <a href="#">Verifying the Status of a LAG Interface on page 2124</a></li> <li>• <a href="#">Verifying That LACP Is Configured Correctly and Bundle Members Are Exchanging LACP Protocol Packets on page 2125</a></li> <li>• <a href="#">Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch on page 1950</a></li> <li>• <a href="#">Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch on page 1954</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show lacp statistics interfaces on page 2308</a> <a href="#">show lacp statistics interfaces (QFX Series) on page 2308</a> <a href="#">show lacp statistics interfaces (QFabric Systems) on page 2308</a>
<b>Output Fields</b>	<a href="#">Table 177 on page 2307</a> lists the output fields for the <code>show lacp statistics interfaces</code> command. Output fields are listed in the approximate order in which they appear.

**Table 177: show lacp statistics interfaces Output Fields**

Field Name	Field Description
<b>Aggregated interface</b>	Aggregated interface value.
<b>LACP Statistics</b>	<p>LACP statistics provide the following information:</p> <ul style="list-style-type: none"> <li>• <b>LACP Rx</b>—LACP received counter that increments for each normal hello.</li> <li>• <b>LACP Tx</b>—Number of LACP transmit packet errors logged.</li> <li>• <b>Unknown Rx</b>—Number of unrecognized packet errors logged.</li> <li>• <b>Illegal Rx</b>—Number of invalid packets received.</li> </ul>



## Sample Output

### show lacp statistics interfaces

```
user@host> show lacp statistics interfaces ae0
Aggregated interface: ae0
LACP Statistics:      LACP Rx      LACP Tx      Unknown Rx      Illegal Rx
ge-2/0/0              1352        2035          0                0
ge-2/0/1              1352        2056          0                0
ge-2/2/0              1352        2045          0                0
ge-2/2/1              1352        2043          0                0
```

### show lacp statistics interfaces (QFX Series)

```
user@host> show lacp statistics interfaces ae0
Aggregated interface: ae0
LACP Statistics:      LACP Rx      LACP Tx      Unknown Rx      Illegal Rx
xe-0/0/2              1352        2035          0                0
xe-0/0/3              1352        2056          0                0
```

### show lacp statistics interfaces (QFabric Systems)

```
user@host> show lacp statistics interfaces nodegroup1:ae0
Aggregated interface: nodegroup1:ae0
LACP Statistics:      LACP Rx      LACP Tx      Unknown Rx      Illegal Rx
node1:xe-0/0/2        1352        2035          0                0
node2:xe-0/0/3        1352        2056          0                0
```



## show uplink-failure-detection

<b>Syntax</b>	show uplink-failure-detection <group <i>group-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for EX Series switches.
<b>Description</b>	Display information about the uplink-failure-detection group, the member interfaces, and their status.
<b>Options</b>	<b>none</b> —Display information about all groups configured for uplink failure detection.  <b>group <i>group-name</i></b> —(Optional) Display information about the specified group only.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	
<b>List of Sample Output</b>	<a href="#">show uplink-failure-detection on page 2310</a>
<b>Output Fields</b>	<a href="#">Table 178 on page 2309</a> lists the output fields for the <b>show uplink-failure-detection</b> command. Output fields are listed in the approximate order in which they appear.

**Table 178: show uplink-failure-detection Output Fields**

Field Name	Field Description
Group	Name of the group.
Uplink	The uplink interface or interfaces configured as link-to-monitor.  <b>NOTE:</b> The asterisk (*) indicates that the link is up.
Downlink	The downlink interface or interfaces configured as link-to-disable.  <b>NOTE:</b> The asterisk (*) indicates that the link is up.
Failure Action	Status of uplink failure detection: <ul style="list-style-type: none"> <li>Active—The switch has detected an uplink failure and has brought the downlink down.</li> <li>Inactive—The uplink or uplinks are up.</li> </ul>



## Sample Output

```
show                               user@switch> show uplink-failure-detection
uplink-failure-detection          Group                : group1
                                  Uplink                  : ge-0/0/0*
                                  Downlink                  : ge-0/0/1*
                                  Failure Action             : Inactive

                                  Group                    : group2
                                  Uplink                    : ge-0/0/3.0
                                  Downlink                    : ge-0/0/4.0
                                  Failure Action             : Active
```



## CHAPTER 26

# Troubleshooting

- [Troubleshooting Procedures on page 2311](#)

## Troubleshooting Procedures

---

- [Troubleshooting an Aggregated Ethernet Interface on page 2311](#)
- [Troubleshooting Network Interfaces on page 2311](#)

## Troubleshooting an Aggregated Ethernet Interface

**Problem** The `show interfaces terse` command shows that the LAG is down.

**Solution** Check the following:

- Verify that there is no configuration mismatch.
- Verify that all member ports are up.
- Verify that a LAG is part of family ethernet-switching (Layer 2 LAG) or family inet (Layer 3 LAG).
- Verify that the LAG member is connected to the correct LAG at the other end.
- Verify that the LAG members belong to the same switch.

- Related Documentation**
- [Verifying the Status of a LAG Interface on page 2124](#)
  - [Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch on page 1950](#)

## Troubleshooting Network Interfaces

### The interface on the port in which an SFP or SFP+ transceiver is installed in an SFP or SFP+ module is down

---

**Problem** The QFX Series has an SFP or SFP+ module installed. The interface on the port in which an SFP or SFP+ transceiver is installed is down.

When you check the status with the CLI command `show interfaces interface-name`, the disabled port is not listed.



**Cause** By default, the SFP or SFP+ module operates in the 10-Gigabit Ethernet mode and supports only SFP or SFP+ transceivers. The operating mode for the module is incorrectly set.

**Solution** Only SFP or SFP+ transceivers can be installed in SFP or SFP+ modules. You must configure the operating mode of the SFP or SFP+ module to match the type of transceiver you want to use. For SFP+ transceivers, configure 10-Gigabit Ethernet operating mode.



## PART 9

# Routing Options

- [Overview on page 2315](#)
- [Configuration on page 2319](#)
- [Administration on page 2447](#)
- [Troubleshooting on page 2633](#)







## CHAPTER 27

# Overview

- [Routing Options Overview on page 2315](#)

## Routing Options Overview

---

- [Overview of Routing Options on page 2315](#)
- [Understanding Virtual Router Routing Instances on page 2316](#)
- [Understanding Distributed Periodic Packet Management on page 2316](#)

## Overview of Routing Options

In addition to dynamic routing protocols, you can configure static routing on QFX Series switches. You can also configure a variety of protocol-independent routing properties, such as

- Per-packet load balancing (equal cost multipath routing)
- Autonomous system numbers
- Autonomous system confederation members
- Router identifiers
- Routing table groups
- Multicast scoping



## Understanding Virtual Router Routing Instances

Virtual router routing instances allow administrators to divide a QFX Series switch into multiple independent virtual routers, each with its own routing table. Virtual router routing instances enable you to isolate traffic without using multiple devices to segment your network. You can create routing instances for unicast routing protocols and PIM sparse mode.

Each virtual router routing instance consists of sets of the following:

- Routing tables
- Interfaces that belong to these routing tables
- Routing protocol configurations
- Routing option configurations

You can use virtual router routing instances to isolate customer traffic on your network and to bind customer-specific routing instances to customer-owned interfaces. Each interface can belong to only one routing instance. QFX switches and QFabric systems support as many as 256 virtual router routing instances.

### Related Documentation

- [Configuring Virtual Router Routing Instances on page 2323](#)

## Understanding Distributed Periodic Packet Management

Periodic packet management (PPM) is responsible for processing a variety of time-sensitive periodic tasks for particular processes so that other processes on the QFX Series can more optimally direct their resources. PPM is responsible for the periodic transmission of packets on behalf of its various client processes, which include the processes that control the Link Aggregation Control Protocol (LACP) and Bidirectional Forwarding Detection (BFD) protocol, and also for receiving packets on behalf of these client processes. PPM also gathers some statistics and sends process-specific packets. PPM cannot be disabled and is always running on any operational switch.

The responsibility for PPM processing on the switch is distributed between the Routing Engine and the access interfaces for all protocols that use PPM by default. This distributed model provides a faster response time for protocols that use PPM than the response time provided by the nondistributed model.

If distributed PPM is disabled, the PPM process runs on the Routing Engine only.

You can disable distributed PPM for all protocols that use PPM. You can also disable distributed PPM for LACP packets only.



**BEST PRACTICE:** We generally recommend that you disable distributed PPM only if Juniper Networks Customer Service advises you to do so. You should disable distributed PPM only if you have a compelling reason to disable it.

---



**Related Documentation**

- [Configuring Distributed Periodic Packet Management on page 2322](#)







## CHAPTER 28

# Configuration

- [Configuration Tasks on page 2319](#)
- [Configuration Examples on page 2324](#)
- [Configuration Statements on page 2348](#)

### Configuration Tasks

---

- [Configuring Static Routing on page 2320](#)
- [Configuring Per-Packet Load Balancing on page 2320](#)
- [Configuring Distributed Periodic Packet Management on page 2322](#)
- [Configuring Virtual Router Routing Instances on page 2323](#)



## Configuring Static Routing

Static routes are routes that are manually configured and entered into the routing table.

The switch uses static routes:

- When the switch does not have a route to a destination that has a better (lower) *preference* value. The preference is an arbitrary value in the range from 0 through 255 that the software uses to rank routes received from different protocols, interfaces, or remote systems. The routing protocol process generally determines the active route by selecting the route with the lowest preference value. In the given range, **0** is the lowest and **255** is the highest.
- When the switch cannot determine the route to a destination.
- When the switch is forwarding unroutable packets.

To configure basic static route options using the CLI:

- To configure the switch's default gateway:  

```
[edit]
user@switch# set routing-options static route 0.0.0.0/0 next-hop 10.0.1.1
```
- To configure a static route and specify the next address to be used when routing traffic to the static route:  

```
[edit]
user@switch# set routing-options static route 20.0.0.0/24 next-hop 10.0.0.2.1
```
- To always keep the static route in the forwarding table:  

```
[edit]
user@switch# set routing-options static route 20.0.0.0/24 retain
```
- To prevent the static route from being readvertised:  

```
[edit]
user@switch# set routing-options static route 20.0.0.0/24 no-readvertise
```
- To remove inactive routes from the forwarding table:  

```
[edit]
user@switch# set routing-options static route 20.0.0.0/24 active
```

### Related Documentation

- [Monitoring Routing Information on page 2447](#)

## Configuring Per-Packet Load Balancing

When there are multiple equal-cost paths to the same destination for the active route, Junos OS chooses one of the next-hop addresses to install into the forwarding table in a random fashion by default. Whenever the set of next hops for a destination changes in any way, the next-hop address is chosen again, also in a random fashion.

You can configure Junos OS so that, for the active route, all next-hop addresses for a destination are installed in the forwarding table. This is called per-packet load balancing. You can use this feature to spread traffic across multiple paths.



When per-packet load balancing is configured, traffic is divided into individual flows (up to a maximum of 16). Packets for an individual flow are sent out a single interface. To determine flows, the switch examines each of the following packet fields:

- Source IP address
- Destination IP address
- Protocol
- Source port number
- Destination port number
- Source interface index
- Type of service (ToS)

The switch recognizes packets in which all of these parameters are identical and ensures that these packets are sent out through the same interface. This prevents problems that might otherwise occur with packets arriving at their destination out of their original sequence.



**NOTE:** Load balancing is not supported on management interfaces.

The following steps show how to configure per-packet load balancing:

1. Define a load-balancing routing policy by including one or more **policy-statement** statements at the **[edit policy-options]** hierarchy level, defining an action of **load-balance per-packet**:

```
policy-statement policy-name {
  from {
    match-conditions;
    route-filter destination-prefix match-type <actions>;
    prefix-list name;
  }
  then {
    load-balance per-packet;
  }
}
```

2. Apply the policy to routes exported from the routing table to the forwarding table. To do this, include the **forwarding-table** and **export** statements:

```
forwarding-table {
  export policy-name;
}
```

#### Related Documentation

- [Examples: Configuring Per-Packet Load Balancing on page 2324](#)



## Configuring Distributed Periodic Packet Management

Periodic packet management (PPM) is responsible for processing a variety of time-sensitive periodic tasks so that other processes on the QFX Series can more optimally direct their resources.

The responsibility for PPM processing on the switch is distributed between the Routing Engine and the access interfaces for all protocols that use PPM by default. This distributed model provides a faster response time for protocols that use PPM than the response time provided by the nondistributed model.

If distributed PPM is disabled, the PPM process runs on the Routing Engine only.

You can disable distributed PPM for all protocols that use PPM. You can also disable distributed PPM for Link Aggregation Control Protocol (LACP) packets only.



**BEST PRACTICE:** We generally recommend that you disable distributed PPM only if Juniper Networks Customer Service advises you to do so. You should disable distributed PPM only if you have a compelling reason to disable it.

This topic describes:

- [Disabling or Enabling Distributed Periodic Packet Management Globally on page 2322](#)
- [Disabling or Enabling Distributed Periodic Packet Management for LACP Packets on page 2322](#)

### Disabling or Enabling Distributed Periodic Packet Management Globally

Distributed PPM is enabled by default. Disable distributed PPM if you need to move all PPM processing to the Routing Engine. Enable distributed PPM if it was previously disabled and you need to run distributed PPM.

To disable distributed PPM:

```
[edit routing-options]  
user@switch# set ppm no-delegate-processing
```

To enable distributed PPM if it was previously disabled:

```
[edit routing-options]  
user@switch# delete ppm no-delegate-processing
```

### Disabling or Enabling Distributed Periodic Packet Management for LACP Packets

Distributed PPM is enabled by default. Disable distributed PPM for only LACP packets if you need to move all PPM processing for LACP packets to the Routing Engine.

To disable distributed PPM for LACP packets:

```
[edit protocols]  
user@switch# set lacp ppm centralized
```

To enable distributed PPM for LACP packets if it was previously disabled:

```
[edit protocols]
```



```
user@switch# delete lacp ppm centralized
```

#### Related Documentation

- [Understanding Distributed Periodic Packet Management on page 2316](#)
- [Understanding Aggregated Ethernet Interfaces and LACP on page 1913](#)

## Configuring Virtual Router Routing Instances

Use virtual router routing instances to divide a QFX Series switch into multiple independent virtual routers, each with its own routing table. Virtual router routing instances enable you to isolate traffic without using multiple devices to segment your network. You can create routing instances for unicast routing protocols and PIM sparse mode.

To configure virtual router routing instances:

1. Create a routing instance:

```
[edit routing-instances]user@switch# set routing-instance-name instance-type virtual-router
```



**NOTE:** The default routing instance, master, refers to the main inet.0 routing table. The master routing instance is reserved and cannot be specified as a routing instance.

2. Bind each routing instance to the corresponding interfaces:

```
[edit routing-instances]user@switch# set routing-instance-name interface
device-name:type-fpc/pic/port.logical-unit-number
```



**NOTE:**

- You must bind routing instances to interfaces from the Node devices assigned to the network Node group only. If you try to bind routing instances to interfaces from the Node devices assigned to server Node groups, the configuration does not commit.
- You can bind an interface to one routing instance only.

3. Create each of the logical interfaces bound to each routing instance:

```
[edit interfaces]user@switch# set device-name:type-fpc/pic/port unit logical-unit-number
family inet address ip-address
```



**NOTE:** Do not create a logical interface using the family ethernet-switching option in this step. Binding an interface using the family ethernet-switching option to a routing instance can cause the interface to shut down.

4. (Optional) Configure routing protocols for the routing instance at the `[edit routing-instances routing-instance-name protocols]` hierarchy level.
5. (Optional) Configure routing options for the routing instance at the `[edit routing-instances routing-instance-name routing-options]` hierarchy level.



- Related Documentation**
- [Understanding Virtual Router Routing Instances on page 2316](#)
  - [Understanding Interfaces on the QFabric System](#)
  - [Understanding Node Groups](#)
  - [Verifying That Virtual Router Routing Instances Are Working on page 2448](#)

## Configuration Examples

---

- [Examples: Configuring Per-Packet Load Balancing on page 2324](#)
- [Examples: Configuring BFD for Static Routes on page 2325](#)
- [Example: Configuring BFD Authentication for Static Routes on page 2339](#)

### Examples: Configuring Per-Packet Load Balancing

Perform per-packet load balancing for all routes:

```
[edit]
policy-options {
  policy-statement load-balancing-policy {
    then {
      load-balance per-packet;
    }
  }
}
routing-options {
  forwarding-table {
    export load-balancing-policy;
  }
}
```

Perform per-packet load balancing for a limited set of routes:

```
[edit]
policy-options {
  policy-statement load-balancing-policy {
    from {
      route-filter 192.168.10/24 orlonger;
      route-filter 9.114/16 orlonger;
    }
    then {
      load-balance per-packet;
    }
  }
}
routing-options {
  forwarding-table {
    export load-balancing-policy;
  }
}
```

- Related Documentation**
- [Configuring Per-Packet Load Balancing on page 2320](#)



## Examples: Configuring BFD for Static Routes

- [Understanding BFD for Static Routes on page 2325](#)
- [Example: Configuring BFD for Static Routes on page 2328](#)
- [Example: Enabling BFD on Qualified Next Hops in Static Routes on page 2334](#)

### Understanding BFD for Static Routes

The Bidirectional Forwarding Detection (BFD) protocol is a simple hello mechanism that detects failures in a network. BFD works with a wide variety of network environments and topologies. A pair of routing devices exchanges BFD packets. Hello packets are sent at a specified, regular interval. A neighbor failure is detected when the routing device stops receiving a reply after a specified interval. The BFD failure detection timers have shorter time limits than the static route failure detection mechanisms, so they provide faster detection.

The BFD failure detection timers are adaptive and can be adjusted to be faster or slower. The lower the BFD failure detection timer value, the faster the failure detection and vice versa. For example, the timers can adapt to a higher value if the adjacency fails (that is, the timer detects failures more slowly). Or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. A back-off algorithm increases the receive (Rx) interval by two if the local BFD instance is the reason for the session flap. The transmission (Tx) interval is increased by two if the remote BFD instance is the reason for the session flap. You can use the **clear bfd adaptation** command to return BFD interval timers to their configured values. The **clear bfd adaptation** command is hitless, meaning that the command does not affect traffic flow on the routing device.

By default, BFD is supported on single-hop static routes. In Junos OS Release 8.2 and later, BFD also supports multihop static routes.

To enable failure detection, include the **bfd-liveness-detection** statement in the static route configuration.

In Junos OS Release 9.1 and later, the BFD protocol is supported for IPv6 static routes. Global unicast and link-local IPv6 addresses are supported for static routes. The BFD protocol is not supported on multicast or anycast IPv6 addresses. For IPv6, the BFD protocol supports only static routes and only in Junos OS Release 9.3 and later. IPv6 for BFD is not supported for any other protocol.

To configure the BFD protocol for IPv6 static routes, include the **bfd-liveness-detection** statement at the **[edit routing-options rib inet6.0 static route destination-prefix]** hierarchy level.

In Junos OS Release 8.5 and later, you can configure a hold-down interval to specify how long the BFD session must remain up before a state change notification is sent.

To specify the hold-down interval, include the **holddown-interval** statement in the BFD configuration.



You can configure a number in the range from 0 through 255,000 milliseconds. The default is 0. If the BFD session goes down and then comes back up during the hold-down interval, the timer is restarted.



**NOTE:** If a single BFD session includes multiple static routes, the hold-down interval with the highest value is used.

To specify the minimum transmit and receive intervals for failure detection, include the **minimum-interval** statement in the BFD configuration.

This value represents both the minimum interval after which the local routing device transmits hello packets and the minimum interval after which the routing device expects to receive a reply from the neighbor with which it has established a BFD session. You can configure a number in the range from 1 through 255,000 milliseconds. Optionally, instead of using this statement, you can configure the minimum transmit and receive intervals separately using the **transmit-interval**, **minimum-interval**, and **minimum-receive-interval** statements.



**NOTE:** BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD of less than 100 ms for Routing Engine-based sessions and 10 ms for distributed BFD sessions can cause undesired BFD flapping.

Depending on your network environment, these additional recommendations might apply:

- For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of 300 ms for Routing Engine-based sessions and 100 ms for distributed BFD sessions.
- For very large-scale network deployments with a large number of BFD sessions, contact Juniper Networks customer support for more information.
- For BFD sessions to remain up during a Routing Engine switchover event when nonstop active routing (NSR) is configured, specify a minimum interval of 2500 ms for Routing Engine-based sessions. For distributed BFD sessions with NSR configured, the minimum interval recommendations are unchanged and depend only on your network deployment.



**NOTE:** SRX Series devices do not support distributed BFD.

To specify the minimum receive interval for failure detection, include the **minimum-receive-interval** statement in the BFD configuration. This value represents the minimum interval after which the routing device expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a number in the range from 1 through 255,000 milliseconds. Optionally, instead of using this statement, you



can configure the minimum receive interval using the **minimum-interval** statement at the **[edit routing-options static route destination-prefix bfd-liveness-detection]** hierarchy level.

To specify the number of hello packets not received by the neighbor that causes the originating interface to be declared down, include the **multiplier** statement in the BFD configuration.

The default value is 3. You can configure a number in the range from 1 through 255.

To specify a threshold for detecting the adaptation of the detection time, include the **threshold** statement in the BFD configuration.

When the BFD session detection time adapts to a value equal to or higher than the threshold, a single trap and a system log message are sent. The detection time is based on the multiplier of the **minimum-interval** or the **minimum-receive-interval** value. The threshold must be a higher value than the multiplier for either of these configured values. For example if the **minimum-receive-interval** is 300 ms and the **multiplier** is 3, the total detection time is 900 ms. Therefore, the detection time threshold must have a value higher than 900.

To specify the minimum transmit interval for failure detection, include the **transmit-interval** **minimum-interval** statement in the BFD configuration.

This value represents the minimum interval after which the local routing device transmits hello packets to the neighbor with which it has established a BFD session. You can configure a value in the range from 1 through 255,000 milliseconds. Optionally, instead of using this statement, you can configure the minimum transmit interval using the **minimum-interval** statement at the **[edit routing-options static route destination-prefix bfd-liveness-detection]** hierarchy level.

To specify the threshold for the adaptation of the transmit interval, include the **transmit-interval threshold** statement in the BFD configuration.

The threshold value must be greater than the transmit interval. When the BFD session transmit time adapts to a value greater than the threshold, a single trap and a system log message are sent. The detection time is based on the multiplier of the value for the **minimum-interval** or the **minimum-receive-interval** statement at the **[edit routing-options static route destination-prefix bfd-liveness-detection]** hierarchy level. The threshold must be a higher value than the multiplier for either of these configured values.

To specify the BFD version, include the **version** statement in the BFD configuration. The default is to have the version detected automatically.

To include an IP address for the next hop of the BFD session, include the **neighbor** statement in the BFD configuration.



**NOTE:** You must configure the **neighbor** statement if the next hop specified is an interface name. If you specify an IP address as the next hop, that address is used as the neighbor address for the BFD session.



In Junos OS Release 9.0 and later, you can configure BFD sessions not to adapt to changing network conditions.

To disable BFD adaptation, include the **no-adaptation** statement in the BFD configuration.



**NOTE:** We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation in your network.



**NOTE:** If BFD is configured only on one end of a static route, the route is removed from the routing table. BFD establishes a session when BFD is configured on both ends of the static route.

BFD is not supported on ISO address families in static routes. BFD does support IS-IS.

If you configure graceful Routing Engine switchover (GRES) at the same time as BFD, GRES does not preserve the BFD state information during a failover.

Junos OS also supports BFD over multihop static routes. For example, you can configure BFD over a Layer 3 path to provide path integrity over that path. You can limit the number of hops by specifying the time to live (TTL).

To configure BFD over multihop static routes, include the following statements:

```
static route destination-prefix {  
  bfd-liveness-detection {  
    local-address ip-address;  
    minimum-receive-ttl number;  
  }  
}
```

To specify the source address for the multihop static route and to enable multihop BFD support, include the **local-address** statement.

To specify the number of hops, include the **minimum-receive-ttl** statement. You must configure this statement for a multihop BFD session. You can configure a value in the range from 1 through 255. It is optional for a single-hop BFD session. If you configure the **minimum-receive-ttl** statement for a single-hop session, the value must be 255.

---

### Example: Configuring BFD for Static Routes

This example shows how to configure Bidirectional Forwarding Detection (BFD) for static routes.

- [Requirements on page 2329](#)
- [Overview on page 2329](#)
- [Configuration on page 2329](#)
- [Verification on page 2332](#)



### Requirements

In this example, no special configuration beyond device initialization is required.

### Overview


There are many practical applications for static routes. Static routing is often used at the network edge to support attachment to stub networks, which, given their single point of entry and egress, are well suited to the simplicity of a static route. In Junos OS, static routes have a global preference of 5. Static routes are activated if the specified next hop is reachable.

In this example, you configure the static route 192.168.47.0/24 from the provider network to the customer network, using the next-hop address of 172.16.1.2. You also configure a static default route of 0.0.0.0/0 from the customer network to the provider network, using a next-hop address of 172.16.1.1.

For demonstration purposes, some loopback interfaces are configured on Device B and Device D. These loopback interfaces provide addresses to ping and thus verify that the static routes are working.

Figure 46 on page 2329 shows the sample network.

**Figure 46: Customer Routes Connected to a Service Provider**

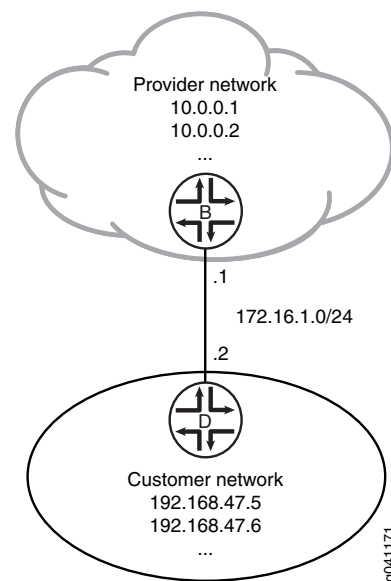

### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device B**

```

set interfaces ge-1/2/0 unit 0 description B->D
set interfaces ge-1/2/0 unit 0 family inet address 172.16.1.1/24
set interfaces lo0 unit 57 family inet address 10.0.0.1/32
  
```



```
set interfaces lo0 unit 57 family inet address 10.0.0.2/32
set routing-options static route 192.168.47.0/24 next-hop 172.16.1.2
set routing-options static route 192.168.47.0/24 bfd-liveness-detection minimum-interval
  1000
set protocols bfd traceoptions file bfd-trace
set protocols bfd traceoptions flag all
```

**Device D**

```
set interfaces ge-1/2/0 unit 1 description D->B
set interfaces ge-1/2/0 unit 1 family inet address 172.16.1.2/24
set interfaces lo0 unit 2 family inet address 192.168.47.5/32
set interfaces lo0 unit 2 family inet address 192.168.47.6/32
set routing-options static route 0.0.0.0/0 next-hop 172.16.1.1
set routing-options static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 1000
set protocols bfd traceoptions file bfd-trace
set protocols bfd traceoptions flag all
```

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure BFD for static routes:

1. On Device B, configure the interfaces.

```
[edit interfaces]
user@B# set ge-1/2/0 unit 0 description B->D
user@B# set ge-1/2/0 unit 0 family inet address 172.16.1.1/24
user@B# set lo0 unit 57 family inet address 10.0.0.1/32
user@B# set lo0 unit 57 family inet address 10.0.0.2/32
```

2. On Device B, create a static route and set the next-hop address.

```
[edit routing-options]
user@B# set static route 192.168.47.0/24 next-hop 172.16.1.2
```

3. On Device B, configure BFD for the static route.

```
[edit routing-options]
user@B# set static route 192.168.47.0/24 bfd-liveness-detection minimum-interval
  1000
```

4. On Device B, configure tracing operations for BFD.

```
[edit protocols]
user@B# set bfd traceoptions file bfd-trace
user@B# set bfd traceoptions flag all
```

5. If you are done configuring Device B, commit the configuration.

```
[edit]
user@B# commit
```

6. On Device D, configure the interfaces.

```
[edit interfaces]
user@D# set ge-1/2/0 unit 1 description D->B
user@D# set ge-1/2/0 unit 1 family inet address 172.16.1.2/24
user@D# set lo0 unit 2 family inet address 192.168.47.5/32
user@D# set lo0 unit 2 family inet address 192.168.47.6/32
```



7. On Device D, create a static route and set the next-hop address.  

```
[edit routing-options]
user@D# set static route 0.0.0.0/0 next-hop 172.16.1.1
```
8. On Device D, configure BFD for the static route.  

```
[edit routing-options]
user@D# set static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 1000
```
9. On Device D, configure tracing operations for BFD.  

```
[edit protocols]
user@D# set bfd traceoptions file bfd-trace
user@D# set bfd traceoptions flag all
```
10. If you are done configuring Device D, commit the configuration.  

```
[edit]
user@D# commit
```

### Results

Confirm your configuration by issuing the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
Device B user@B# show interfaces
ge-1/2/0 {
  unit 0 {
    description B->D;
    family inet {
      address 172.16.1.1/24;
    }
  }
}
lo0 {
  unit 57 {
    family inet {
      address 10.0.0.1/32;
      address 10.0.0.2/32;
    }
  }
}

user@D# show protocols
bfd {
  traceoptions {
    file bfd-trace;
    flag all;
  }
}

user@B# show routing-options
static {
  route 192.168.47.0/24 {
    next-hop 172.16.1.2;
    bfd-liveness-detection {
```



```

        minimum-interval 1000;
    }
}
}

Device D user@D# show interfaces
ge-1/2/0 {
  unit 1 {
    description D->B;
    family inet {
      address 172.16.1.2/24;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 192.168.47.5/32;
      address 192.168.47.6/32;
    }
  }
}

user@D# show routing-options
static {
  route 0.0.0.0/0 {
    next-hop 172.16.1.1;
    bfd-liveness-detection {
      minimum-interval 1000;
    }
  }
}
}

```

### Verification

Confirm that the configuration is working properly.

- [Verifying That BFD Sessions Are Up on page 2332](#)
- [Viewing Detailed BFD Events on page 2333](#)

### Verifying That BFD Sessions Are Up

**Purpose** Verify that the BFD sessions are up, and view details about the BFD sessions.

**Action** From operational mode, enter the **show bfd session extensive** command.

```

user@B> show bfd session extensive

```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.2	Up	lt-1/2/0.0	3.000	1.000	3

```

Client Static, TX interval 1.000, RX interval 1.000
Session up time 00:14:30
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Replicated, routing table index 172
Min async interval 1.000, min slow interval 1.000
Adaptive async TX interval 1.000, RX interval 1.000

```



```

Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3
Remote min TX interval 1.000, min RX interval 1.000, multiplier 3
Local discriminator 2, remote discriminator 1
Echo mode disabled/inactive

```

```

1 sessions, 1 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

```

```
user@D> show bfd session extensive
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.1	Up	lt-1/2/0.1	3.000	1.000	3

```

Client Static, TX interval 1.000, RX interval 1.000
Session up time 00:14:35
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Replicated, routing table index 170
Min async interval 1.000, min slow interval 1.000
Adaptive async TX interval 1.000, RX interval 1.000
Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3
Remote min TX interval 1.000, min RX interval 1.000, multiplier 3
Local discriminator 1, remote discriminator 2
Echo mode disabled/inactive

```

```

1 sessions, 1 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

```

**Meaning** The TX interval 1.000, RX interval 1.000 output represents the setting configured with the **minimum-interval** statement. All of the other output represents the default settings for BFD. To modify the default settings, include the optional statements under the **bfd-liveness-detection** statement.

### Viewing Detailed BFD Events

**Purpose** View the contents of the BFD trace file to assist in troubleshooting, if needed.

**Action** From operational mode, enter the file **show /var/log/bfd-trace** command.

```

user@B> file show /var/log/bfd-trace
Nov 23 14:26:55 Data (9) len 35: (hex) 42 46 44 20 70 65 72 69 6f 64 69 63 20
78 6d 69 74 20 72
Nov 23 14:26:55 PPM Trace: BFD periodic xmit rt tbl index 172
Nov 23 14:26:55 Received Downstream TraceMsg (22) len 108:
Nov 23 14:26:55 IfIndex (3) len 4: 0
Nov 23 14:26:55 Protocol (1) len 1: BFD
Nov 23 14:26:55 Data (9) len 83: (hex) 70 70 6d 64 5f 62 66 64 5f 73 65 6e 64
6d 73 67 20 3a 20
Nov 23 14:26:55 PPM Trace: pcmd_bfd_sendmsg : socket 12 len 24, ifl 78 src
172.16.1.1 dst 172.16.1.2 errno 65
Nov 23 14:26:55 Received Downstream TraceMsg (22) len 93:
Nov 23 14:26:55 IfIndex (3) len 4: 0
Nov 23 14:26:55 Protocol (1) len 1: BFD
Nov 23 14:26:55 Data (9) len 68: (hex) 42 46 44 20 70 65 72 69 6f 64 69 63 20
78 6d 69 74 20 74

```

**Meaning** BFD messages are being written to the trace file.



### Example: Enabling BFD on Qualified Next Hops in Static Routes

This example shows how to configure a static route with multiple possible next hops. Each next hop has Bidirectional Forwarding Detection (BFD) enabled.

- [Requirements on page 2334](#)
- [Overview on page 2334](#)
- [Configuration on page 2334](#)
- [Verification on page 2337](#)

#### Requirements

In this example, no special configuration beyond device initialization is required.

#### Overview


In this example, Device B has the static route **192.168.47.0/24** with two possible next hops. The two next hops are defined using two **qualified-next-hop** statements. Each next hop has BFD enabled.

BFD is also enabled on Device D because BFD must be enabled on both ends of the connection.

A next hop is included in the routing table if the BFD session is up. The next hop is removed from the routing table if the BFD session is down.

See [Figure 47 on page 2334](#).

**Figure 47: BFD Enabled on Qualified Next Hops**

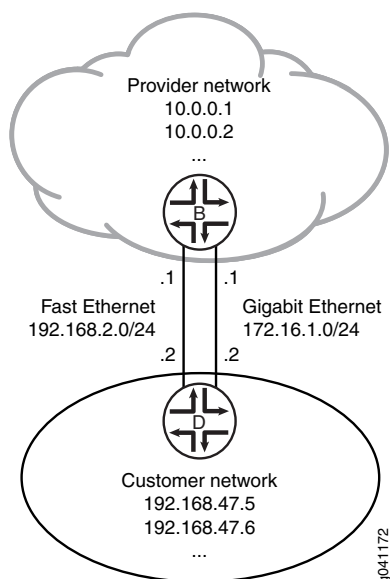

#### Configuration

##### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network



configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device B**

```

set interfaces fe-0/1/0 unit 2 description secondary-B->D
set interfaces fe-0/1/0 unit 2 family inet address 192.168.2.1/24
set interfaces ge-1/2/0 unit 0 description B->D
set interfaces ge-1/2/0 unit 0 family inet address 172.16.1.1/24
set routing-options static route 192.168.47.0/24 qualified-next-hop 192.168.2.2
  bfd-liveness-detection minimum-interval 60
set routing-options static route 192.168.47.0/24 qualified-next-hop 172.16.1.2
  bfd-liveness-detection minimum-interval 60

```

**Device D**

```

set interfaces fe-0/1/0 unit 3 description secondary-D->B
set interfaces fe-0/1/0 unit 3 family inet address 192.168.2.2/24
set interfaces ge-1/2/0 unit 1 description D->B
set interfaces ge-1/2/0 unit 1 family inet address 172.16.1.2/24
set routing-options static route 0.0.0.0/0 qualified-next-hop 192.168.2.1
set routing-options static route 0.0.0.0/0 qualified-next-hop 172.16.1.1
set routing-options static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 60

```

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure a static route with two possible next hops, both with BFD enabled:

- On Device B, configure the interfaces.
 

```

[edit interfaces fe-0/1/0]
user@B# set unit 2 description secondary-B->D
user@B# set unit 2 family inet address 192.168.2.1/24

[edit interfaces ge-1/2/0]
user@B# set unit 0 description B->D
user@B# set unit 0 family inet address 172.16.1.1/24

```
- On Device B, configure the static route with two next hops, both with BFD enabled.
 

```

[edit routing-options static route 192.168.47.0/24]
user@B# set qualified-next-hop 192.168.2.2 bfd-liveness-detection minimum-interval
60
user@B# set qualified-next-hop 172.16.1.2 bfd-liveness-detection minimum-interval
60

```
- On Device D, configure the interfaces.
 

```

[edit interfaces fe-0/1/0]
user@D# set unit 3 description secondary-D->B
user@D# set unit 3 family inet address 192.168.2.2/24

[edit interfaces ge-1/2/0]
user@D# set unit 1 description D->B
user@D# set unit 1 family inet address 172.16.1.2/24

```
- On Device D, configure a BFD-enabled default static route with two next hops to the provider network.



In this case, BFD is enabled on the route, not on the next hops.

```
[edit routing-options static route 0.0.0.0/0]
user@D# set qualified-next-hop 192.168.2.1
user@D# set qualified-next-hop 172.16.1.1
user@D# set bfd-liveness-detection minimum-interval 60
```

**Results** Confirm your configuration by issuing the **show interfaces** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@B# show interfaces
fe-0/1/0 {
  unit 2 {
    description secondary-B->D;
    family inet {
      address 192.168.2.1/24;
    }
  }
}
ge-1/2/0 {
  unit 0 {
    description B->D;
    family inet {
      address 172.16.1.1/24;
    }
  }
}

user@B# show routing-options
static {
  route 192.168.47.0/24 {
    qualified-next-hop 192.168.2.2 {
      bfd-liveness-detection {
        minimum-interval 60;
      }
    }
    qualified-next-hop 172.16.1.2 {
      bfd-liveness-detection {
        minimum-interval 60;
      }
    }
  }
}

user@D# show interfaces
fe-0/1/0 {
  unit 3 {
    description secondary-D->B;
    family inet {
      address 192.168.2.2/24;
    }
  }
}
ge-1/2/0 {
  unit 1 {
```



```

        description D->B;
        family inet {
            address 172.16.1.2/24;
        }
    }
}

user@D# show routing-options
static {
    route 0.0.0.0/0 {
        qualified-next-hop 192.168.2.1;
        qualified-next-hop 172.16.1.1;
        bfd-liveness-detection {
            minimum-interval 60;
        }
    }
}
}

```

If you are done configuring the devices, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.

- [Checking the Routing Tables on page 2337](#)
- [Verifying the BFD Sessions on page 2337](#)
- [Removing BFD from Device D on page 2338](#)
- [Removing BFD from One Next Hop on page 2338](#)

### Checking the Routing Tables

**Purpose** Make sure that the static route appears in the routing table on Device B with two possible next hops.

**Action**

```

user@B> show route 192.168.47.0 extensive
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
192.168.47.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 192.168.47.0/24 -> {192.168.2.2}
    *Static Preference: 5
        Next hop type: Router
        Address: 0x9334010
        Next-hop reference count: 1
        Next hop: 172.16.1.2 via ge-1/2/0.0
        Next hop: 192.168.2.2 via fe-0/1/0.2, selected
        State: <Active Int Ext>
        Age: 9
        Task: RT
        Announcement bits (1): 3-KRT
        AS path: I

```

**Meaning** Both next hops are listed. The next hop 192.168.2.2 is the selected route.

### Verifying the BFD Sessions

**Purpose** Make sure that the BFD sessions are up.



**Action** user@B> show bfd session

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.2	Up	ge-1/2/0.0	0.720	0.240	3
192.168.2.2	Up	fe-0/1/0.2	0.720	0.240	3

2 sessions, 2 clients

Cumulative transmit rate 8.3 pps, cumulative receive rate 8.3 pps

**Meaning** The output shows that the BFD sessions are up.

### *Removing BFD from Device D*

**Purpose** Demonstrate what happens when the BFD session is down for both next hops.

**Action** 1. Deactivate BFD on Device D.

```
[edit routing-options static route 0.0.0.0/0]
user@D# deactivate bfd-liveness-detection
user@D# commit
```

2. Rerun the **show bfd session** command on Device B.

user@B> show bfd session

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.2	Down	ge-1/2/0.0	3.000	1.000	3
192.168.2.2	Down	fe-0/1/0.2	3.000	1.000	3

2 sessions, 2 clients

Cumulative transmit rate 2.0 pps, cumulative receive rate 2.0 pps

3. Rerun the **show route 192.168.47.0** command on Device B.

user@B> show route 192.168.47.0

**Meaning** As expected, when the BFD sessions are down, the static route is removed from the routing table.

### *Removing BFD from One Next Hop*

**Purpose** Demonstrate what happens when only one next hop has BFD enabled.

**Action** 1. If it is not already deactivated, deactivate BFD on Device D.

```
[edit routing-options static route 0.0.0.0/0]
user@D# deactivate bfd-liveness-detection
user@D# commit
```

2. Deactivate BFD on one of the next hops on Device B.

```
[edit routing-options static route 192.168.47.0/24 qualified-next-hop 172.16.1.2]
user@B# deactivate bfd-liveness-detection
user@B# commit
```

3. Rerun the **show bfd session** command on Device B.



```
user@B> show bfd session
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
192.168.2.2	Down	fe-0/1/0.2	3.000	1.000	3

4. Rerun the **show route 192.168.47.0 extensive** command on Device B.

```
user@B> show route 192.168.47.0 extensive
```

```
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
192.168.47.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 192.168.47.0/24 -> {172.16.1.2}
  *Static Preference: 5
    Next hop type: Router, Next hop index: 624
    Address: 0x92f0178
    Next-hop reference count: 3
    Next hop: 172.16.1.2 via ge-1/2/0.0, selected
    State: <Active Int Ext>
    Age: 2:36
    Task: RT
    Announcement bits (1): 3-KRT
    AS path: I
```

**Meaning** As expected, the BFD session is down for the 192.168.2.2 next hop. The 172.16.1.2 next hop remains in the routing table, and the route remains active, because BFD is not a condition for this next hop to remain valid.

**Related Documentation**

- [Example: Configuring BFD Authentication for Static Routes on page 2339](#)
- [Example: Configuring BFD for OSPF on page 3365](#)
- [Example: Configuring BFD for BGP on page 2844](#)
- [Example: Configuring BFD for IS-IS](#)
- [Configuring PIM and the Bidirectional Forwarding Detection \(BFD\) Protocol](#)

## Example: Configuring BFD Authentication for Static Routes

- [Understanding BFD Authentication for Static Routes on page 2339](#)
- [Example: Configuring BFD Authentication for Static Routes on page 2341](#)

### Understanding BFD Authentication for Static Routes

Bidirectional Forwarding Detection (BFD) enables rapid detection of communication failures between adjacent systems. By default, authentication for BFD sessions is disabled. However, when you run BFD over Network Layer protocols, the risk of service attacks can be significant.



**NOTE:** We strongly recommend using authentication if you are running BFD over multiple hops or through insecure tunnels.



Beginning with Junos OS Release 9.6, Junos OS supports authentication for BFD sessions running over IPv4 and IPv6 static routes. BFD authentication is not supported on MPLS OAM sessions. BFD authentication is only supported in the Canada and United States version of the Junos OS image and is not available in the export version.

You authenticate BFD sessions by specifying an authentication algorithm and keychain, and then associating that configuration information with a security authentication keychain using the keychain name.

The following sections describe the supported authentication algorithms, security keychains, and level of authentication that can be configured:

- [BFD Authentication Algorithms on page 2340](#)
- [Security Authentication Keychains on page 2341](#)
- [Strict Versus Loose Authentication on page 2341](#)

### ***BFD Authentication Algorithms***

Junos OS supports the following algorithms for BFD authentication:

- **simple-password**—Plain-text password. One to 16 bytes of plain text are used to authenticate the BFD session. One or more passwords can be configured. This method is the least secure and should be used only when BFD sessions are not subject to packet interception.
- **keyed-md5**—Keyed Message Digest 5 hash algorithm for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed MD5 uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than or equal to the last sequence number received. Although more secure than a simple password, this method is vulnerable to replay attacks. Increasing the rate at which the sequence number is updated can reduce this risk.
- **meticulous-keyed-md5**—Meticulous keyed Message Digest 5 hash algorithm. This method works in the same manner as keyed MD5, but the sequence number is updated with every packet. Although more secure than keyed MD5 and simple passwords, this method might take additional time to authenticate the session.
- **keyed-sha-1**—Keyed Secure Hash Algorithm I for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed SHA uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. The key is not carried within the packets. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than the last sequence number received.
- **meticulous-keyed-sha-1**—Meticulous keyed Secure Hash Algorithm I. This method works in the same manner as keyed SHA, but the sequence number is updated with every packet. Although more secure than keyed SHA and simple passwords, this method might take additional time to authenticate the session.





**NOTE:** Nonstop active routing (NSR) is not supported with meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

### **Security Authentication Keychains**

The security authentication keychain defines the authentication attributes used for authentication key updates. When the security authentication keychain is configured and associated with a protocol through the keychain name, authentication key updates can occur without interrupting routing and signaling protocols.

The authentication keychain contains one or more keychains. Each keychain contains one or more keys. Each key holds the secret data and the time at which the key becomes valid. The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.

BFD allows multiple clients per session, and each client can have its own keychain and algorithm defined. To avoid confusion, we recommend specifying only one security authentication keychain.

### **Strict Versus Loose Authentication**

By default, strict authentication is enabled, and authentication is checked at both ends of each BFD session. Optionally, to smooth migration from nonauthenticated sessions to authenticated sessions, you can configure *loose checking*. When loose checking is configured, packets are accepted without authentication being checked at each end of the session. This feature is intended for transitional periods only.

### **Example: Configuring BFD Authentication for Static Routes**

This example shows how to configure Bidirectional Forwarding Detection (BFD) authentication for static routes.

- [Requirements on page 2341](#)
- [Overview on page 2341](#)
- [Configuration on page 2342](#)
- [Verification on page 2345](#)

#### **Requirements**

Junos OS Release 9.6 or later (Canda and United States version).

BFD authentication is only supported in the Canada and United States version of the Junos OS image and is not available in the export version.

#### **Overview**

You can configure authentication for BFD sessions running over IPv4 and IPv6 static routes. Routing instances and logical systems are also supported.



The following steps are needed to configure authentication on a BFD session:

1. Specify the BFD authentication algorithm for the static route.
2. Associate the authentication keychain with the static route.
3. Configure the related security authentication keychain. This must be configured on the main router.




**TIP:** We recommend that you specify loose authentication checking if you are transitioning from nonauthenticated sessions to authenticated sessions.

[edit]

```
user@host> set routing-options static route ipv4 bfd-liveness-detection
authentication loose-check
```

Figure 48 on page 2342 shows the sample network.

**Figure 48: Customer Routes Connected to a Service Provider**

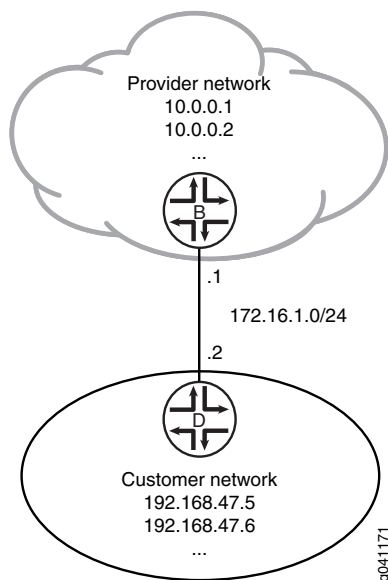

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

#### Device B

```
set interfaces ge-1/2/0 unit 0 description B->D
set interfaces ge-1/2/0 unit 0 family inet address 172.16.1.1/24
set interfaces lo0 unit 57 family inet address 10.0.0.1/32
set interfaces lo0 unit 57 family inet address 10.0.0.2/32
set routing-options static route 192.168.47.0/24 next-hop 172.16.1.2
set routing-options static route 192.168.47.0/24 bfd-liveness-detection minimum-interval
1000
```



```

set routing-options static route 192.168.47.0/24 bfd-liveness-detection authentication
  key-chain bfd-kc4
set routing-options static route 192.168.47.0/24 bfd-liveness-detection authentication
  algorithm keyed-sha-1
set security authentication-key-chains key-chain bfd-kc4 key 5 secret
  "$9$JhZHmn6Ap0In/9ApOcSs24oaZikPft3wY24ZG.mz36AtOIEyMWxSrlKvM-dbs2a
  DkP5Ft0IQFclev7N"
set security authentication-key-chains key-chain bfd-kc4 key 5 start-time
  "2011-1-1.12:00:00 -0800"

```

**Device D**

```

set interfaces ge-1/2/0 unit 1 description D->B
set interfaces ge-1/2/0 unit 1 family inet address 172.16.1.2/24
set interfaces lo0 unit 2 family inet address 192.168.47.5/32
set interfaces lo0 unit 2 family inet address 192.168.47.6/32
set routing-options static route 0.0.0.0/0 next-hop 172.16.1.1
set routing-options static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 1000
set routing-options static route 0.0.0.0/0 bfd-liveness-detection authentication key-chain
  bfd-kc4
set routing-options static route 0.0.0.0/0 bfd-liveness-detection authentication algorithm
  keyed-sha-1
set security authentication-key-chains key-chain bfd-kc4 key 5 secret
  "$9$JhZHmn6Ap0In/9ApOcSs24oaZikPft3wY24ZG.mz36AtOIEyMWxSrlKvM-dbs2a
  DkP5Ft0IQFclev7N"
set security authentication-key-chains key-chain bfd-kc4 key 5 start-time
  "2011-1-1.12:00:00 -0800"

```

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure BFD for static routes:

- On Device B, configure the interfaces.
 

```

[edit interfaces]
user@B# set ge-1/2/0 unit 0 description B->D
user@B# set ge-1/2/0 unit 0 family inet address 172.16.1.1/24

user@B# set lo0 unit 57 family inet address 10.0.0.1/32
user@B# set lo0 unit 57 family inet address 10.0.0.2/32

```
- On Device B, create a static route and set the next-hop address.
 

```

[edit routing-options]
user@B# set static route 192.168.47.0/24 next-hop 172.16.1.2

```
- On Device B, configure BFD for the static route.
 

```

[edit routing-options]
user@B# set static route 192.168.47.0/24 bfd-liveness-detection minimum-interval
  1000

```
- On Device B, specify the algorithm (**keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, **meticulous-keyed-sha-1**, or **simple-password**) to use for BFD authentication on the static route.
 

```

[edit routing-options]

```



```
user@B# set static route 192.168.47.0/24 bfd-liveness-detection authentication
algorithm keyed-sha-1
```



**NOTE:** Nonstop active routing (NSR) is not supported with the meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

5. On Device B, specify the keychain to be used to associate BFD sessions on the specified route with the unique security authentication keychain attributes.

This should match the keychain name configured at the **[edit security authentication key-chains]** hierarchy level.

```
[edit routing-options]
user@B# set static route 192.168.47.0/24 bfd-liveness-detection authentication
key-chain bfd-kc4
```

6. On Device B, specify the unique security authentication information for BFD sessions:

- The matching keychain name as specified in Step 5.
- At least one key, a unique integer between 0 and 63. Creating multiple keys allows multiple clients to use the BFD session.
- The secret data used to allow access to the session.
- The time at which the authentication key becomes active, in the format *yyyy-mm-dd.hh:mm:ss*.

```
[edit security authentication-key-chains key-chain bfd-kc4]
user@B# set key 5 secret
"$S$JhZHmn6Ap0In/9ApOcSs24oaZikPfT3wY24ZG.mz36AtOIEyMWxSrlKvM-dbs2a
DkP5Ft0IQFclev7N"
user@B# set key 5 start-time "2011-1-1.12:00:00 -0800"
```

7. If you are done configuring Device B, commit the configuration.

```
[edit]
user@B# commit
```

8. Repeat the configuration on Device D.

The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.

### Results

Confirm your configuration by issuing the **show interfaces**, **show routing-options**, and **show security** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
Device B user@B# show interfaces
ge-1/2/0 {
```



```

    unit 0 {
      description B->D;
      family inet {
        address 172.16.1.1/24;
      }
    }
  }
}
lo0 {
  unit 57 {
    family inet {
      address 10.0.0.1/32;
      address 10.0.0.2/32;
    }
  }
}

user@B# show routing-options
static {
  route 192.168.47.0/24 {
    next-hop 172.16.1.2;
    bfd-liveness-detection {
      minimum-interval 1000;
      authentication {
        key-chain bfd-kc4;
        algorithm keyed-sha-1;
      }
    }
  }
}

user@B# show security
authentication-key-chains {
  key-chain bfd-kc4 {
    key 5 {
      secret
        "$9$JhZHmn6Ap0In/9ApOcSs24oaZikPfT3wY24ZG.mz36AtOIEyMWxSrlKvM-dbs2a
        DkP5FtOIQFclev7N"; ## SECRET-DATA
      start-time "2011-1-1.12:00:00 -0800";
    }
  }
}

```

### Verification

Confirm that the configuration is working properly.

- [Verifying That BFD Sessions Are Up on page 2345](#)
- [Viewing Details About the BFD Session on page 2346](#)
- [Viewing Extensive BFD Session Information on page 2346](#)

### Verifying That BFD Sessions Are Up

**Purpose** Verify that the BFD sessions are up.



**Action** From operational mode, enter the **show bfd session** command.

```
user@B> show bfd session
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.2	Up	ge-1/2/0.0	3.000	1.000	3

1 sessions, 1 clients  
Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

**Meaning** The command output shows that the BFD session is up.

#### *Viewing Details About the BFD Session*

**Purpose** View details about the BFD sessions and make sure that authentication is configured.

**Action** From operational mode, enter the **show bfd session detail** command.

```
user@B> show bfd session detail
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.2	Up	ge-1/2/0.0	3.000	1.000	3

Client Static, TX interval 1.000, RX interval 1.000, **Authenticate**  
Session up time 00:53:58  
Local diagnostic NbrSignal, remote diagnostic None  
Remote state Up, version 1  
Logical system 9, routing table index 22

1 sessions, 1 clients  
Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

**Meaning** In the command output, **Authenticate** is displayed to indicate that BFD authentication is configured.

#### *Viewing Extensive BFD Session Information*

**Purpose** View more detailed information about the BFD sessions.

**Action** From operational mode, enter the **show bfd session extensive** command.

```
user@B> show bfd session extensive
```

Address	State	Interface	Time	Interval	Multiplier
172.16.1.2	Up	ge-1/2/0.0	3.000	1.000	3

Client Static, TX interval 1.000, RX interval 1.000, **Authenticate**  
keychain bfd-kc4, algo keyed-sha-1, mode strict  
Session up time 01:39:45  
Local diagnostic NbrSignal, remote diagnostic None  
Remote state Up, version 1  
Logical system 9, routing table index 22  
Min async interval 1.000, min slow interval 1.000  
Adaptive async TX interval 1.000, RX interval 1.000  
Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3  
Remote min TX interval 1.000, min RX interval 1.000, multiplier 3  
Local discriminator 3, remote discriminator 4  
Echo mode disabled/inactive  
Authentication enabled/active, keychain bfd-kc4, algo keyed-sha-1, mode strict



1 sessions, 1 clients

Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

**Meaning** In the command output, **Authenticate** is displayed to indicate that BFD authentication is configured. The output for the **extensive** command provides the keychain name, the authentication algorithm, and the mode for each client in the session.

**Related Documentation**

- [Examples: Configuring BFD for Static Routes on page 2325](#)



## Configuration Statements

---



## active

<b>Syntax</b>	(active   passive);
<b>Hierarchy Level</b>	<pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   static)   (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)], [edit routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   static)   (defaults   route)], [edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i>   (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)], [edit routing-options (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)], [edit routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)]</pre>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	<p>Determine whether static, aggregate, or generated routes are removed from the routing and forwarding tables when they become inactive. Static routes are only removed from the routing table if the next hop becomes unreachable. This can occur if the local or neighbor interface goes down. Routes that have been configured to remain continually installed in the routing and forwarding tables are marked with <b>reject</b> next hops when they are inactive.</p> <ul style="list-style-type: none"> <li>• <b>active</b>—Remove a route from the routing and forwarding tables when it becomes inactive.</li> <li>• <b>passive</b>—Have a route remain continually installed in the routing and forwarding tables even when it becomes inactive.</li> </ul> <p>Include the <b>active</b> statement when configuring an individual route in the <b>route</b> portion of the <b>static</b> statement to override a <b>passive</b> option specified in the <b>defaults</b> portion of the statement.</p>
<b>Default</b>	<b>active</b>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Examples: Configuring Static Routes</li> <li>• Example: Summarizing Routes Through Route Aggregation</li> <li>• Example: Conditionally Generating Static Routes</li> </ul>



## aggregate (Routing)

Syntax	<pre> aggregate {   defaults {     ... aggregate-options ...   }   route destination-prefix {     policy policy-name;     ... aggregate-options ...   } } </pre>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>rib</b> <i>routing-table-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <b>rib</b> <i>routing-table-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <b>rib</b> <i>routing-table-name</i>],</p> <p>[edit routing-options],</p> <p>[edit routing-options <b>rib</b> <i>routing-table-name</i>]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
Description	Configure aggregate routes.
Options	<p><b>aggregate-options</b>—Additional information about aggregate routes that is included with the route when it is installed in the routing table. Specify zero or more of the following options in <b>aggregate-options</b>. Each option is explained separately.</p> <ul style="list-style-type: none"> <li>• (<b>active</b>   <b>passive</b>);</li> <li>• <b>as-path</b> &lt;<i>as-path</i>&gt; &lt;origin (egp   igp   incomplete)&gt; &lt;atomic-aggregate&gt; &lt;aggregator <i>as-number ip-address</i>&gt;;</li> <li>• (<b>brief</b>   <b>full</b>);</li> <li>• <b>community</b> [ <i>community-ids</i> ];</li> <li>• <b>discard</b>;</li> <li>• (<b>metric</b>   <b>metric2</b>   <b>metric3</b>   <b>metric4</b>) <i>value</i> &lt;type <i>type</i>&gt;;</li> <li>• (<b>preference</b>   <b>preference2</b>   <b>color</b>   <b>color2</b>) <i>preference</i> &lt;type <i>type</i>&gt;;</li> <li>• <b>tag string</b>;</li> </ul> <p><b>defaults</b>—Specify global aggregate route options. These options only set default attributes inherited by all newly created aggregate routes. These are treated as global defaults</p>



and apply to all the aggregate routes you configure in the **aggregate** statement. This part of the **aggregate** statement is optional.

**route *destination-prefix***—Configure a nondefault aggregate route:

- **default**—For the default route to the destination. This is equivalent to specifying an IP address of **0.0.0.0/0**.
- ***destination-prefix/prefix-length***—***destination-prefix*** is the network portion of the IP address, and ***prefix-length*** is the destination prefix length.

The **policy** statement is explained separately.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration.
	routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Summarizing Routes Through Route Aggregation</li></ul>



## as-path (Routing Options)

<b>Syntax</b>	<code>as-path &lt;as-path&gt; &lt;aggregator as-number ip-address&gt; &lt;atomic-aggregate&gt; &lt;origin (egp   igp   incomplete)&gt;;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)],</p> <p>[edit routing-options (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	<p>Associate BGP autonomous system (AS) path information with a static, aggregate, or generated route.</p> <p>In Junos OS Release 9.1 and later, the numeric range for the AS number is extended to provide BGP support for 4-byte AS numbers as defined in RFC 4893, <i>BGP Support for Four-octet AS Number Space</i>. RFC 4893 introduces two new optional transitive BGP attributes, AS4_PATH and AS4_AGGREGATOR. These new attributes are used to propagate 4-byte AS path information across BGP speakers that do not support 4-byte AS numbers. RFC 4893 also introduces a reserved, well-known, 2-byte AS number, AS 23456. This reserved AS number is called AS_TRANS in RFC 4893. All releases of Junos OS support 2-byte AS numbers.</p> <p>In Junos OS Release 9.2 and later, you can also configure a 4-byte AS number using the AS-dot notation format of two integer values joined by a period: <i>&lt;16-bit high-order value in decimal&gt;.&lt;16-bit low-order value in decimal&gt;</i>. For example, the 4-byte AS number of 65,546 in plain-number format is represented as 1.10 in the AS-dot notation format. You can specify a value in the range from 0.0 through 65535.65535 in AS-dot notation format.</p>
<b>Default</b>	No AS path information is associated with static routes.
<b>Options</b>	<p><b>aggregator</b>—(Optional) Attach the BGP <b>aggregator</b> path attribute to the aggregate route. You must specify the last AS number that formed the aggregate route (encoded as two octets) for <b>as-number</b>, followed by the IP address of the BGP system that formed the aggregate route for <b>ip-address</b>.</p>



**as-path**—(Optional) AS path to include with the route. It can include a combination of individual AS path numbers and AS sets. Enclose sets in brackets ( [ ] ). The first AS number in the path represents the AS immediately adjacent to the local AS. Each subsequent number represents an AS that is progressively farther from the local AS, heading toward the origin of the path. You cannot specify a regular expression for **as-path**. You must use a complete, valid AS path.

**atomic-aggregate**—(Optional) Attach the BGP **atomic-aggregate** path attribute to the aggregate route. This path attribute indicates that the local system selected a less specific route instead of a more specific route.

**origin igp**—(Optional) BGP origin attribute that indicates that the path information originated in another AS.

**origin igp**—(Optional) BGP origin attribute that indicates that the path information originated within the local AS.

**origin incomplete**—(Optional) BGP origin attribute that indicates that the path information was learned by some other means.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- Examples: Configuring Static Routes
- Example: Summarizing Routes Through Route Aggregation
- Example: Conditionally Generating Static Routes
- Understanding a 4-Byte Capable Router AS Path Through a 2-Byte Capable Domain in the *Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview*



## autonomous-system

---

<b>Syntax</b>	<code>autonomous-system <i>autonomous-system</i> &lt;asdot-notation&gt; &lt;loops <i>number</i>&gt; {     independent-domain &lt;no-attrset&gt;; }</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options], [edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options], [edit routing-options]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. <b>asdot-notation</b> option introduced in Junos OS Release 9.3. <b>asdot-notation</b> option introduced in Junos OS Release 9.3 for EX Series switches. <b>no-attrset</b> option introduced in Junos OS Release 10.4. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	Specify the routing device's AS number.

An autonomous system (AS) is a set of routing devices that are under a single technical administration and that generally use a single interior gateway protocol (IGP) and metrics to propagate routing information within the set of routing devices. An AS appears to other ASs to have a single, coherent interior routing plan and presents a consistent picture of what destinations are reachable through it. ASs are identified by a number that is assigned by the Network Information Center (NIC) in the United States (<http://www.isi.edu>).

If you are using BGP on the routing device, you must configure an AS number.

The AS path attribute is modified when a route is advertised to an EBGP peer. Each time a route is advertised to an EBGP peer, the local routing device prepends its AS number to the existing path attribute, and a value of 1 is added to the AS number.

In Junos OS Release 9.1 and later, the numeric range is extended to provide BGP support for 4-byte AS numbers as defined in RFC 4893, *BGP Support for Four-octet AS Number Space*. RFC 4893 introduces two new optional transitive BGP attributes, AS4\_PATH and AS4\_AGGREGATOR. These new attributes are used to propagate 4-byte AS path information across BGP speakers that do not support 4-byte AS numbers. RFC 4893 also introduces a reserved, well-known, 2-byte AS number, AS 23456. This reserved AS number is called AS\_TRANS in RFC 4893. All releases of Junos OS support 2-byte AS numbers.

In Junos OS Release 9.3 and later, you can also configure a 4-byte AS number using the AS-dot notation format of two integer values joined by a period: *<16-bit high-order value in decimal>.<16-bit low-order value in decimal>*. For example, the 4-byte AS number of 65,546 in plain-number format is represented as 1.10 in the AS-dot notation format.

**Options**    ***autonomous-system***—AS number. Use a number assigned to you by the NIC.



**Range:** 1 through 4,294,967,295 ( $2^{32} - 1$ ) in plain-number format for 4-byte AS numbers

In this example, the 4-byte AS number 65,546 is represented in plain-number format:

```
[edit]
routing-options {
  autonomous-system 65546;
}
```

**Range:** 0.0 through 65535.65535 in AS-dot notation format for 4-byte numbers

In this example, 1.10 is the AS-dot notation format for 65,546:

```
[edit]
routing-options {
  autonomous-system 1.10;
}
```

**Range:** 1 through 65,535 in plain-number format for 2-byte AS numbers (this is a subset of the 4-byte range)

In this example, the 2-byte AS number 60,000 is represented in plain-number format:

```
[edit]
routing-options {
  autonomous-system 60000;
}
```

**asdot-notation**—(Optional) Display the configured 4-byte autonomous system number in the AS-dot notation format.

**Default:** Even if a 4-byte AS number is configured in the AS-dot notation format, the default is to display the AS number in the plain-number format.

**loops number**—(Optional) Specify the number of times detection of the AS number in the AS\_PATH attribute causes the route to be discarded or hidden. For example, if you configure **loops 1**, the route is hidden if the AS number is detected in the path one or more times. This is the default behavior. If you configure **loops 2**, the route is hidden if the AS number is detected in the path two or more times.

**Range:** 1 through 10

**Default:** 1



**NOTE:** When you specify the same AS number in more than one routing instance on the local routing device, you must configure the same number of loops for the AS number in each instance. For example, if you configure a value of 3 for the loops statement in a VRF routing instance that uses the same AS number as that of the master instance, you must also configure a value of 3 loops for the AS number in the master instance.

Use the **independent-domain** option if the loops statement must be enabled only on a subset of routing instances.

The remaining statement is explained separately.



<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Examples: Configuring External BGP Peering on page 2643</a></li><li>• <a href="#">Examples: Configuring Internal BGP Peering on page 2666</a></li><li>• 4-Byte Autonomous System Numbers Overview in the <i>Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview</i></li><li>• Juniper Networks Implementation of 4-Byte Autonomous System Numbers in the <i>Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview</i></li><li>• Configuring 4-Byte Autonomous System Numbers in the <i>Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview</i></li></ul>

---

## backup-pe-group

---

<b>Syntax</b>	<pre>backup-pe-group group-name {     backups [ addresses ];     local-address address; }</pre>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast], [edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-instances <i>routing-instance-name</i> routing-options multicast], [edit routing-options multicast]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.0. Statement introduced in Junos OS Release 9.5 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	Configure a backup provider edge (PE) group for ingress PE redundancy when point-to-multipoint label-switched paths (LSPs) are used for multicast distribution.
<b>Options</b>	<p><b>backups <i>addresses</i></b>—Specify the address of backup PE routers for ingress PE redundancy when point-to-multipoint LSPs are used for multicast distribution.</p> <p><b>local-address <i>address</i></b>—Specify the address of the local PE router for ingress PE redundancy when point-to-multipoint LSPs are used for multicast distribution.</p> <p><b>pe-group-name</b>—Specify the name for the group of PE routers that provide ingress PE router redundancy for point-to-multipoint LSPs.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Configuring Ingress PE Redundancy</li><li>• Configuring Ingress PE Router Redundancy for Point-to-Multipoint LSPs</li></ul>



## backups

---

<b>Syntax</b>	<code>backups [ <i>addresses</i> ];</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <b>backup-pe-group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <b>backup-pe-group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <b>backup-pe-group</b> <i>group-name</i>],</p> <p>[edit routing-options multicast <b>backup-pe-group</b> <i>group-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.0.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Configure the address of backup PEs for ingress PE redundancy when point-to-multipoint label-switched paths (LSPs) are used for multicast distribution.
<b>Options</b>	<b><i>addresses</i></b> —Addresses of other PEs in the backup group.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Example: Configuring Ingress PE Redundancy</li> </ul>



## bandwidth (Multicast Flow Map)

---

<b>Syntax</b>	<code>bandwidth ( <i>bps</i>   <i>adaptive</i> );</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">flow-map</a> ], [edit logical-systems <i>logical-system-name</i> routing-options multicast <a href="#">flow-map</a> ], [edit routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">flow-map</a> ], [edit routing-options multicast <a href="#">flow-map</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.3. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	Configure the bandwidth property for multicast flow maps.
<b>Options</b>	<b>adaptive</b> —Specify that the bandwidth is measured for the flows that are matched by the flow map.  <b>bps</b> —Bandwidth, in bits per second, for the flow map. <b>Range:</b> 0 through any amount of bandwidth <b>Default:</b> 2 Mbps
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Example: Configuring a Multicast Flow Map</li></ul>



## bfd-liveness-detection (Routing Options Static Route)

**Syntax**

```

bfd-liveness-detection {
    authentication {
        algorithm algorithm-name;
        key-chain key-chain-name;
        loose-check;
    }
    detection-time {
        threshold milliseconds;
    }
    holddown-interval milliseconds;
    local-address ip-address;
    minimum-interval milliseconds;
    minimum-receive-interval milliseconds;
    minimum-receive-ttl number;
    multiplier number;
    neighbor address;
    no-adaptation;
    transmit-interval {
        minimum-interval milliseconds;
        threshold milliseconds;
    }
    version (1 | automatic);
}

```

**Hierarchy Level**

```

[edit logical-systems logical-system-name routing-instances routing-instance-name
 routing-options rib routing-table-name static route destination-prefix],
[edit logical-systems logical-system-name routing-instances routing-instance-name
 routing-options rib routing-table-name static route destination-prefix qualified-next-hop
 (interface-name | address)],
[edit logical-systems logical-system-name routing-instances routing-instance-name
 routing-options static route destination-prefix],
[edit logical-systems logical-system-name routing-instances routing-instance-name
 routing-options static route destination-prefix qualified-next-hop (interface-name |
 address)],
[edit logical-systems logical-system-name routing-options rib routing-table-name static
 route destination-prefix],
[edit logical-systems logical-system-name routing-options rib routing-table-name static
 route destination-prefix qualified-next-hop (interface-name | address)],
[edit logical-systems logical-system-name routing-options static route destination-prefix],
[edit logical-systems logical-system-name routing-options static route destination-prefix
 qualified-next-hop (interface-name | address)],
[edit routing-instances routing-instance-name routing-options rib routing-table-name static
 route destination-prefix],
[edit routing-instances routing-instance-name routing-options rib routing-table-name static
 route destination-prefix qualified-next-hop (interface-name | address)],
[edit routing-instances routing-instance-name routing-options static route destination-prefix],
[edit routing-instances routing-instance-name routing-options static route destination-prefix
 qualified-next-hop (interface-name | address)],
[edit routing-options rib routing-table-name static route destination-prefix],
[edit routing-options rib routing-table-name static route destination-prefix qualified-next-hop
 (interface-name | address)],
[edit routing-options static route destination-prefix],

```



[edit routing-options static route *destination-prefix* qualified-next-hop (*interface-name* | *address*)]

- Release Information** Statement introduced before Junos OS Release 7.4.  
**detection-time threshold** and **transmit-interval threshold** options introduced in Junos OS Release 8.2.  
**local-address** statement introduced in Junos OS Release 8.2.  
**minimum-receive-ttl** statement introduced in Junos OS Release 8.2.  
Support for logical routers introduced in Junos OS Release 8.3.  
**holddown-interval** statement introduced in Junos OS Release 8.5.  
**no-adaptation** statement introduced in Junos OS Release 9.0.  
Support for IPv6 static routes introduced in Junos OS Release 9.1.  
**authentication algorithm**, **authentication key-chain**, and **authentication loose-check** statements introduced in Junos OS Release 9.6.  
Statement introduced in Junos OS Release 12.1 for the QFX Series.  
Statement introduced in Junos OS Release 12.3 for ACX Series routers.
- Description** Configure bidirectional failure detection timers and authentication criteria for static routes.



- Options**    **authentication algorithm *algorithm-name***—Configure the algorithm used to authenticate the specified BFD session: **simple-password**, **keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, or **meticulous-keyed-sha-1**.
- authentication key-chain *key-chain-name***—Associate a security key with the specified BFD session using the name of the security keychain. The name you specify must match one of the keychains configured in the **authentication-key-chains key-chain** statement at the **[edit security]** hierarchy level.
- authentication loose-check**—(Optional) Configure loose authentication checking on the BFD session. Use only for transitional periods when authentication may not be configured at both ends of the BFD session.
- detection-time threshold *milliseconds***—Configure a threshold for the adaptation of the BFD session detection time. When the detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.
- holddown-interval *milliseconds***—Configure an interval specifying how long a BFD session must remain up before a state change notification is sent. If the BFD session goes down and then comes back up during the hold-down interval, the timer is restarted.  
**Range:** 0 through 255,000  
**Default:** 0
- local-address *ip-address***—Enable a multihop BFD session and configure the source address for the BFD session.
- minimum-interval *milliseconds***—Configure the minimum interval after which the local routing device transmits a hello packet and then expects to receive a reply from the neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum transmit and receive intervals separately using the **transmit-interval**, **minimum-interval**, and **minimum-receive-interval** statements.  
**Range:** 1 through 255,000
- minimum-receive-interval *milliseconds***—Configure the minimum interval after which the routing device expects to receive a reply from a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum receive interval using the **minimum-interval** statement at the **[edit routing-options static route *destination-prefix* bfd-liveness-detection]** hierarchy level.  
**Range:** 1 through 255,000
- minimum-receive-ttl *number***—Configure the time to live (TTL) for the multihop BFD session.  
**Range:** 1 through 255  
**Default:** 255
- multiplier *number***—Configure number of hello packets not received by the neighbor that causes the originating interface to be declared down.  
**Range:** 1 through 255  
**Default:** 3



**neighbor *address***—Configure a next-hop address for the BFD session for a next hop specified as an interface name.

**no-adaptation**—Specify for BFD sessions not to adapt to changing network conditions. We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation enabled in your network.

**transmit-interval threshold *milliseconds***—Configure the threshold for the adaptation of the BFD session transmit interval. When the transmit interval adapts to a value greater than the threshold, a single trap and a single system message are sent. The interval threshold must be greater than the minimum transmit interval.

**Range:** 0 through 4,294,967,295

**transmit-interval minimum-interval *milliseconds***—Configure the minimum interval at which the routing device transmits hello packets to a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum transmit interval using the **minimum-interval** statement at the **[edit routing-options static route *destination-prefix* bfd-liveness-detection]** hierarchy level.

**Range:** 1 through 255,000

**version**—Configure the BFD version to detect: **1** (BFD version 1) or **automatic** (autodetect the BFD version).


**Default:** automatic

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring BFD for Static Routes on page 2328</a></li><li>• <a href="#">Example: Configuring BFD Authentication for Static Routes on page 2341</a></li></ul>
------------------------------	--



## bgp-orf-cisco-mode

<b>Syntax</b>	<code>bgp-orf-cisco-mode;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>outbound-route-filter</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> <b>outbound-route-filter</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> <b>outbound-route-filter</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>outbound-route-filter</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>outbound-route-filter</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> <b>outbound-route-filter</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>outbound-route-filter</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <b>outbound-route-filter</b>],</p> <p>[edit protocols bgp <b>outbound-route-filter</b>],</p> <p>[edit protocols bgp group <i>group-name</i> <b>outbound-route-filter</b>],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i> <b>outbound-route-filter</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>outbound-route-filter</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>outbound-route-filter</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> <b>outbound-route-filter</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <b>outbound-route-filter</b>],</p> <p>[edit routing-options <b>outbound-route-filter</b>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.2.</p> <p>Statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Support for the BGP group and neighbor hierarchy levels introduced in Junos OS Release 9.2.</p> <p>Support for the BGP group and neighbor hierarchy levels introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	Enable interoperability with routing devices that use the vendor-specific outbound route filter compatibility code of 130 and code type of 128.
	<div>  <p><b>NOTE:</b> To enable interoperability for all BGP peers configured on the routing device, include the statement at the [edit routing-options outbound-route-filter] hierarchy level.</p> </div>
<b>Default</b>	Disabled
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>



- Related Documentation**
- [Example: Configuring BGP Prefix-Based Outbound Route Filtering on page 2807](#)

---

## bmp

---

<b>Syntax</b>	<pre>bmp {     memory limit <i>bytes</i>;     station-address (<i>ip-address</i>   <i>name</i>);     station-port <i>port-number</i>;     statistics-timeout <i>seconds</i>; }</pre>
<b>Hierarchy Level</b>	[edit routing-options]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.5. Statement introduced in Junos OS Release 9.5 for EX Series switches. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	Configure the BGP Monitoring Protocol (BMP), which enables the routing device to collect data from the BGP <b>Adjacency-RIB-In</b> routing tables and periodically send that data to a monitoring station.
<b>Options</b>	<p><b>memory-limit <i>bytes</i></b>—(Optional) Specify a threshold at which to stop collecting BMP data if the limit is exceeded.</p> <p><b>Default:</b> 10 MB</p> <p><b>Range:</b> 1,048,576 through 52,428,800</p> <p><b>station-address (<i>ip-address</i>   <i>name</i>)</b>—Specify the IP address or a valid URL for the monitoring where BMP data should be sent.</p> <p><b>station-port <i>port-number</i></b>—Specify the port number of the monitoring station to use when sending BMP data.</p> <p><b>statistics-timeout <i>seconds</i></b>—(Optional) Specify how often to send BMP data to the monitoring station.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring the BGP Monitoring Protocol</a></li></ul>




## brief

<b>Syntax</b>	(brief   full);
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	<p>Configure all AS numbers from all contributing paths to be included in the aggregate or generated route's path.</p> <ul style="list-style-type: none"> <li>• <b>brief</b>—Include only the longest common leading sequences from the contributing AS paths. If this results in AS numbers being omitted from the aggregate route, the BGP <b>ATOMIC_ATTRIBUTE</b> path attribute is included with the aggregate route.</li> <li>• <b>full</b>—Include all AS numbers from all contributing paths in the aggregate or generated route's path. Include this option when configuring an individual route in the <b>route</b> portion of the <b>generate</b> statement to override a <b>retain</b> option specified in the <b>defaults</b> portion of the statement.</li> </ul>
<b>Default</b>	full
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Summarizing Routes Through Route Aggregation</li> <li>• Example: Conditionally Generating Static Routes</li> <li>• <a href="#">aggregate on page 2350</a></li> <li>• <a href="#">generate on page 2380</a></li> </ul>



## centralized

---

<b>Syntax</b>	centralized;
<b>Hierarchy Level</b>	[edit protocols lacp ppm]
<b>Release Information</b>	Statement introduced in Junos OS Release 10.2 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	<p>Disable distributed periodic packet management (PPM) processing for Link Aggregation Control Protocol (LACP) packets and run all PPM processing for LACP packets on the Routing Engine.</p> <p>This statement disables distributed PPM processing for only LACP packets. You can disable distributed PPM processing for all packets that use PPM and run all PPM processing on the Routing Engine by configuring the <b>no-delegate-processing</b> statement in the [edit routing-options ppm] hierarchy.</p>
	<div><p><b>BEST PRACTICE:</b> We generally recommend that you disable distributed PPM only if Juniper Networks Customer Service advises you to do so. You should disable distributed PPM only if you have a compelling reason to disable it.</p></div>
<b>Default</b>	Distributed PPM processing is enabled for all packets that use PPM.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Configuring Distributed Periodic Packet Management on an EX Series Switch (CLI Procedure)</li><li>• Configuring Aggregated Ethernet LACP (CLI Procedure)</li><li>• <a href="#">Configuring Distributed Periodic Packet Management on page 2322</a></li><li>• <a href="#">Configuring Link Aggregation on page 2033</a></li></ul>



## community (Routing Options)

<b>Syntax</b>	<code>community ([ <i>community-ids</i> ]   no-advertise   no-export   no-export-subconfed   none);</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)],</p> <p>[edit routing-options (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	Associate BGP community information with a static, aggregate, or generated route.
<b>Default</b>	No BGP community information is associated with static routes.
<b>Options</b>	<p><b><i>community-ids</i></b>—One or more community identifiers. The <b><i>community-ids</i></b> format varies according to the type of attribute that you use.</p> <p>The BGP community attribute format is <b><i>as-number:community-value</i></b>:</p> <ul style="list-style-type: none"> <li>• <b><i>as-number</i></b>—AS number of the community member. It can be a value from 1 through 65,535. The AS number can be a decimal or hexadecimal value.</li> <li>• <b><i>community-value</i></b>—Identifier of the community member. It can be a number from 0 through 65,535.</li> </ul> <p>For more information about BGP community attributes, see the “Configuring the Extended Communities Attribute” section in the Routing Policy Configuration Guide.</p> <p>For specifying the BGP community attribute only, you also can specify <b><i>community-ids</i></b> as one of the following well-known community names defined in RFC 1997:</p> <ul style="list-style-type: none"> <li>• <b>no-advertise</b>—Routes containing this community name are not advertised to other BGP peers.</li> <li>• <b>no-export</b>—Routes containing this community name are not advertised outside a BGP confederation boundary.</li> <li>• <b>no-export-subconfed</b>—Routes containing this community name are not advertised to external BGP peers, including peers in other members’ ASs inside a BGP confederation.</li> </ul>





**NOTE:** Extended community attributes are not supported at the [edit routing-options] hierarchy level. You must configure extended communities at the [edit policy-options] hierarchy level. For information about configuring extended communities, see the Routing Policy Configuration Guide.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

- Related Documentation**
- Examples: Configuring Static Routes
  - Example: Summarizing Routes Through Route Aggregation
  - Example: Conditionally Generating Static Routes
  - [aggregate on page 2350](#)
  - [generate on page 2380](#)
  - static



## confederation

<b>Syntax</b>	<code>confederation <i>confederation-autonomous-system</i> members [ <i>autonomous-systems</i> ];</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-options]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	<p>Specify the routing device's confederation AS number.</p> <p>If you administer multiple ASs that contain a very large number of BGP systems, you can group them into one or more <i>confederations</i>. Each confederation is identified by its own AS number, which is called a <i>confederation AS number</i>. To external ASs, a confederation appears to be a single AS. Thus, the internal topology of the ASs making up the confederation is hidden.</p> <p>The BGP path attributes <b>NEXT_HOP</b>, <b>LOCAL_PREF</b>, and <b>MULTI_EXIT_DISC</b>, which normally are restricted to a single AS, are allowed to be propagated throughout the ASs that are members of the same confederation.</p> <p>Because each confederation is treated as if it were a single AS, you can apply the same routing policy to all the ASs that make up the confederation.</p> <p>Grouping ASs into confederations reduces the number of BGP connections required to interconnect ASs.</p> <p>If you are using BGP, you can enable the local routing device to participate as a member of an AS confederation. To do this, include the <b>confederation</b> statement.</p> <p>Specify the AS confederation identifier, along with the peer AS numbers that are members of the confederation.</p> <p>Note that peer adjacencies do not form if two BGP neighbors disagree about whether an adjacency falls within a particular confederation.</p>
<b>Options</b>	<p><b><i>autonomous-systems</i></b>—AS numbers of the confederation members. <b>Range:</b> 1 through 65,535</p> <p><b><i>confederation-autonomous-system</i></b>—Confederation AS number. Use one of the numbers assigned to you by the NIC. <b>Range:</b> 1 through 65,535</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>



- Related Documentation**
- [Example: Configuring BGP Confederations on page 2917](#)

---


## description (Routing Instances)

---

<b>Syntax</b>	description text;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> ], [edit routing-instances <i>routing-instance-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 11.1 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	Provide a text description for the routing instance. If the text includes one or more spaces, enclose it in quotation marks (" "). Any descriptive text you include is displayed in the output of the <b>show route instance detail</b> command and has no effect on the operation of the routing instance.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Configuring Routing Instances on PE Routers in VPNs</li><li>• <a href="#">show route instance on page 2550</a></li></ul>



## discard

<b>Syntax</b>	<code>discard;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit routing-options (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>) (defaults   route)]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	<p>Do not forward packets addressed to this destination. Instead, drop the packets, do not send ICMP unreachable messages to the packets' originators, and install a reject route for this destination into the routing table.</p> <p>To propagate static routes into the routing protocols, include the <b>discard</b> statement when you define the route, along with a routing policy.</p>
	<div>  <p><b>NOTE:</b> In other vendors' software, a common way to propagate static routes into routing protocols is to configure the routes so that the next-hop routing device is the loopback address (commonly, 127.0.0.1). However, configuring static routes in this way (by including a statement such as <b>route <i>address/mask-length</i> next-hop 127.0.0.1</b>) does not propagate the static routes, because the forwarding table ignores static routes whose next-hop routing device is the loopback address.</p> </div>
<b>Default</b>	When an aggregate route becomes active, it is installed in the routing table with a reject next hop, which means that ICMP unreachable messages are sent.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Summarizing Routes Through Route Aggregation</li> <li>• Example: Conditionally Generating Static Routes</li> </ul>



- [aggregate on page 2350](#)
- [generate on page 2380](#)

## **export (Routing Options)**

---

<b>Syntax</b>	<code>export [ <i>policy-name</i> ];</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options forwarding-table], [edit logical-systems <i>logical-system-name</i> routing-options forwarding-table], [edit routing-instances <i>routing-instance-name</i> routing-options forwarding-table], [edit routing-options forwarding-table]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	Apply one or more policies to routes being exported from the routing table into the forwarding table.
<b>Options</b>	<i>policy-name</i> —Name of one or more policies.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Load Balancing BGP Traffic on page 2858</a></li><li>• Routing Policy Configuration Guide</li></ul>



## export-rib

---

<b>Syntax</b>	<code>export-rib <i>routing-table-name</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>rib-groups</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <b>rib-groups</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <b>rib-groups</b> <i>group-name</i>],</p> <p>[edit routing-options <b>rib-groups</b> <i>group-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	Specify the name of the routing table from which Junos OS should export routing information.
<b>Options</b>	<i>routing-table-name</i> —Routing table group name.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Exporting Specific Routes from One Routing Table Into Another Routing Table</li> <li>• <a href="#">import-rib on page 2383</a></li> <li>• passive</li> </ul>



## fate-sharing

---

<b>Syntax</b>	<pre>fate-sharing {     group <i>group-name</i> {         cost <i>value</i>;         from <i>address</i> &lt;to <i>address</i>&gt;;     } }</pre>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-options], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options], [edit routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	<p>Specify a backup path in case the primary path becomes unusable.</p> <p>You specify one or more objects with common characteristics within a group. All objects are treated as /32 host addresses. The objects can be a LAN interface, a router ID, or a point-to-point link. Sequence is insignificant.</p> <p>Changing the fate-sharing database does not affect existing established LSPs until the next CSPF reoptimization. The fate-sharing database does affect fast-reroute detour path computations.</p>
<b>Options</b>	<p><b>cost <i>value</i></b>—Cost assigned to the group. <b>Range:</b> 1 through 65,535 <b>Default:</b> 1</p> <p><b>from <i>address</i></b>—Address of the router or address of the LAN/NBMA interface. For example, an Ethernet network with four hosts in the same fate-sharing group would require you to list all four of the separate <b>from</b> addresses in the group.</p> <p><b>group <i>group-name</i></b>—Each fate-sharing group must have a name, which can have a maximum of 32 characters, including letters, numbers, periods (.), and hyphens (-). You can define up to 512 groups.</p> <p><b>to <i>address</i></b>—(Optional) Address of egress router. For point-to-point link objects, you must specify both a <b>from</b> and a <b>to</b> address.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Configuring the Ingress Router for MPLS-Signaled LSPs</li><li>Junos OS MPLS Applications Configuration Guide</li></ul>



## flow

<b>Syntax</b>	<pre> flow {     route <i>name</i> {         match {             <i>match-conditions</i>;         }         term-order (legacy   standard);         then {             <i>actions</i>;         }     }     validation {         <b>traceoptions</b> {             file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;             flag <i>flag</i> &lt;flag-modifier&gt; &lt;disable&gt;;         }     } } </pre>
<b>Hierarchy Level</b>	[edit routing-options]
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>term-order</b> statement introduced in Junos OS Release 10.0</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Configure a flow route.
<b>Default</b>	legacy
<b>Options</b>	<p><b>actions</b>—An action to take if conditions match.</p> <p><b>match-conditions</b>—Match packets to these conditions.</p> <p><b>route name</b>—Name of the flow route.</p> <p><b>standard</b>—Specify to use version 7 or later of the flow-specification algorithm.</p> <p><b>term-order (legacy   standard)</b>—Specify the version of the flow-specification algorithm.</p> <ul style="list-style-type: none"> <li><b>legacy</b>—Use version 6 of the flow-specification algorithm.</li> <li><b>standard</b>—Use version 7 of the flow-specification algorithm.</li> </ul> <p><b>then</b>—Actions to take on matching packets.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>



- Related Documentation**
- Example: Configuring Flow Routes

---

## flow-map

---

<b>Syntax</b>	<pre>flow-map <i>flow-map-name</i> {     bandwidth (<i>bps</i>   <i>adaptive</i>);     forwarding-cache {         timeout (<i>never non-discard-entry-only</i>   <i>minutes</i>);     }     policy [ <i>policy-names</i> ];     redundant-sources [ <i>addresses</i> ]; }</pre>
<b>Hierarchy Level</b>	<pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>     routing-options multicast], [edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-instances <i>routing-instance-name</i> routing-options multicast], [edit routing-options multicast]</pre>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.2.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Configure multicast flow maps.
<b>Options</b>	<p><i>flow-map-name</i>—Name of the flow-map.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Configuring a Multicast Flow Map</li></ul>



## forwarding-cache (Flow Maps)

---

<b>Syntax</b>	forwarding-cache { timeout (minutes   never non-discard-entry-only ); }
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i> ], [edit logical-systems <i>logical-system-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i> ], [edit routing-instances <i>routing-instance-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i> ], [edit routing-options multicast <b>flow-map</b> <i>flow-map-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.2. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Configure multicast forwarding cache properties for the flow map.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.



## forwarding-cache (Multicast)

---

<b>Syntax</b>	<pre>forwarding-cache {   family (inet   inet6) {     threshold {       log-warning value;       suppress value &lt;reuse value&gt;;     }   }   threshold {     log-warning value;     suppress value &lt;reuse value&gt;;   }   timeout minutes; }</pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast], [edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-instances <i>routing-instance-name</i> routing-options multicast], [edit routing-options multicast]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Configure multicast forwarding cache properties. These properties include threshold suppression and reuse limits, the threshold at which a warning message is logged, and timeout values.</p> <p>Specify a value for the threshold at which to suppress new multicast forwarding cache entries and an optional reuse value for the threshold at which the router begins to create new multicast forwarding cache entries. The range for both is from 1 through 200,000. If configured, the reuse value should be less than the suppression threshold value. The suppression value is mandatory. If you do not specify the optional reuse value, then the number of multicast forwarding cache entries is limited to the suppression value. A new entry is created as soon as the number of multicast forwarding cache entries falls below the suppression value.</p> <p>You can configure the thresholds globally for the multicast forwarding cache or individually for the IPv4 and IPv6 multicast forwarding caches. Configuring the <b>threshold</b> statement globally for the multicast forwarding cache or including the <b>family</b> statement to configure the thresholds for the IPv4 and IPv6 multicast forwarding caches are mutually exclusive.</p>
<b>Default</b>	By default, there are no limits on the number of multicast forwarding cache entries.
<b>Options</b>	<p><b>family (inet   inet6)</b>—(Optional) Apply the configured thresholds to either IPv4 or IPv6 multicast forwarding cache entries.</p> <p><b>Default:</b> By default, the configured thresholds are applied to both IPv4 and IPv6 multicast forwarding cache entries.</p>



The remaining statements are explained separately.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Configuring the Multicast Forwarding Cache</li> </ul>

## forwarding-table

---

<b>Syntax</b>	<pre>forwarding-table {   export [ <i>policy--names</i> ];   (<i>indirect-next-hop</i>   no-indirect-next-hop); }</pre>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-options]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	<p>Configure information about the routing device's forwarding table.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Per-Packet Load Balancing on page 2320</a></li> </ul>



## generate

<b>Syntax</b>	<pre> generate {   defaults {     generate-options;   }   route destination-prefix {     policy policy-name;     generate-options;   } } </pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>rib</b> <i>routing-table-name</i>],</p> <p>[edit routing-options],</p> <p>[edit routing-options <b>rib</b> <i>routing-table-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Configure generated routes, which are used as routes of last resort.
<b>Options</b>	<p><b>defaults</b>—(Optional) Specify global generated route options. These options only set default attributes inherited by all newly created generated routes. These are treated as global defaults and apply to all the generated routes you configure in the <b>generate</b> statement.</p> <p><b>generate-options</b>—Additional information about generated routes, which is included with the route when it is installed in the routing table. Specify zero or more of the following options in <b>generate-options</b>. Each option is explained separately.</p> <ul style="list-style-type: none"> <li>• (<b>active</b>   <b>passive</b>);</li> <li>• <b>as-path</b> <i>&lt;as-path&gt;</i> <i>&lt;origin (egp   igp   incomplete)&gt;</i> <i>&lt;atomic-aggregate&gt;</i> <i>&lt;aggregator as-number in-address&gt;</i>;</li> <li>• (<b>brief</b>   <b>full</b>);</li> <li>• <b>community</b> [ <i>community-ids</i> ];</li> <li>• <b>discard</b>;</li> <li>• (<b>metric</b>   <i>metric2</i>   <i>metric3</i>   <i>metric4</i>) <i>value</i> <i>&lt;type type&gt;</i>;</li> <li>• (<b>preference</b>   <i>preference2</i>   <b>color</b>   <i>color2</i>) <i>preference</i> <i>&lt;type type&gt;</i>;</li> <li>• <b>tag</b> <i>string</i>;</li> </ul> <p><b>route destination-prefix</b>—Configure a non-default generated route:</p> <ul style="list-style-type: none"> <li>• <b>default</b>—For the default route to the destination. This is equivalent to specifying an IP address of 0.0.0.0/0.</li> </ul>



- *destination-prefix/prefix-length—/destination-prefix* is the network portion of the IP address, and *prefix-length* is the destination prefix length.

The **policy** statement is explained separately.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Conditionally Generating Static Routes</li> </ul>


## import (Routing Options)

<b>Syntax</b>	import [ <i>policy-names</i> ];
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options resolution <b>rib</b> ], [edit logical-systems <i>logical-system-name</i> routing-options resolution <b>rib</b> ], [edit routing-instances <i>routing-instance-name</i> routing-options resolution <b>rib</b> ], [edit routing-options resolution <b>rib</b> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Specify one or more import policies to use for route resolution.
<b>Options</b>	<i>policy-names</i> —Name of one or more import policies.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Configuring Route Resolution on PE Routers</li> </ul>




## import-policy

---

<b>Syntax</b>	<code>import-policy [ <i>policy-names</i> ];</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>rib-groups</b> <i>group-name</i> ], [edit logical-systems <i>logical-system-name</i> routing-options <b>rib-groups</b> <i>group-name</i> ], [edit routing-instances <i>routing-instance-name</i> routing-options <b>rib-groups</b> <i>group-name</i> ], [edit routing-options <b>rib-groups</b> <i>group-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Apply one or more policies to routes imported into the routing table group. The <b>import-policy</b> statement complements the <b>import-rib</b> statement and cannot be used unless you first specify the routing tables to which routes are being imported.
<div> <b>NOTE:</b> On EX Series switches, only dynamically learned routes can be imported from one routing table group to another.</div>	
<b>Options</b>	<i>policy-names</i> —Name of one or more policies.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Exporting Specific Routes from One Routing Table Into Another Routing Table</li><li>• <a href="#">export-rib on page 2373</a></li><li>• passive</li></ul>




## import-rib

<b>Syntax</b>	<code>import-rib [ <i>routing-table-names</i> ];</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>rib-groups</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <b>rib-groups</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <b>rib-groups</b> <i>group-name</i>],</p> <p>[edit routing-options <b>rib-groups</b> <i>group-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Specify the name of the routing table into which Junos OS should import routing information. The first routing table name you enter is the primary routing table. Any additional names you enter identify secondary routing tables. When a protocol imports routes, it imports them into the primary and any secondary routing tables. If the primary route is deleted, the secondary route also is deleted. For IPv4 import routing tables, the primary routing table must be <b>inet.0</b> or <b>routing-instance-name.inet.0</b>. For IPv6 import routing tables, the primary routing table must be <b>inet6.0</b>.</p> <p>In Junos OS Release 9.5 and later, you can configure an IPv4 import routing table that includes both IPv4 and IPv6 routing tables. Including both types of routing tables permits you, for example, to populate an IPv6 routing table with IPv6 addresses that are compatible with IPv4. In releases prior to Junos OS Release 9.5, you could configure an import routing table with only either IPv4 or IPv6 routing tables.</p>
	<div>  <p><b>NOTE:</b> On EX Series switches, only dynamically learned routes can be imported from one routing table group to another.</p> </div>
<b>Options</b>	<b><i>routing-table-names</i></b> —Name of one or more routing tables.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Exporting Specific Routes from One Routing Table Into Another Routing Table</li> <li>• <a href="#">export-rib on page 2373</a></li> <li>• passive</li> </ul>



## indirect-next-hop

---

<b>Syntax</b>	(indirect-next-hop   no-indirect-next-hop);
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-options forwarding-table], [edit routing-options forwarding-table]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.2. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Enable indirectly connected next hops for route convergence. This statement is implemented on the Packet Forward Engine to speed up forwarding information base (FIB) updates. Configuring this statement significantly speeds convergence times. The only downside of configuring this statement is that some additional FIB memory overhead is required. Unless routes have an extremely high number of next hops, this increased memory usage should not be noticeable.
<div> <b>NOTE:</b></div> <ul style="list-style-type: none"><li>When virtual private LAN service (VPLS) is configured on the routing device, the <b>indirect-next-hop</b> statement is configurable at the [edit routing-options forwarding-table] hierarchy level. However, this configuration is not applicable to indirect nexthops specific to VPLS routing instances.</li><li>By default, the Junos Trio Modular Port Concentrator (MPC) chipset on MX Series routers is enabled with indirectly connected next hops, and this cannot be disabled using the <b>no-indirect-next-hop</b> statement.</li></ul>	
<b>Default</b>	Disabled.
<b>Options</b>	<b>indirect-next-hop</b> —Enable indirectly connected next hops.  <b>no-indirect-next-hop</b> —Explicitly disable indirect next hops.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Example: Optimizing Route Reconvergence by Enabling Indirect Next Hops on the Packet Forwarding Engine</li></ul>



## install (Routing Options)

<b>Syntax</b>	(install   no-install);
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options static (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> static (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options static (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options static (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> static (defaults   route)]</p> <p>[edit routing-options static (defaults   route)]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Configure whether Junos OS installs all static routes into the forwarding table. Even if you configure a route so it is not installed in the forwarding table, the route is still eligible to be exported from the routing table to other protocols.
<b>Options</b>	<p><b>install</b>—Explicitly install all static routes into the forwarding table. Include this statement when configuring an individual route in the <b>route</b> portion of the <b>static</b> statement to override a <b>no-install</b> option specified in the <b>defaults</b> portion of the statement.</p> <p><b>no-install</b>—Do not install the route into the forwarding table, even if it is the route with the lowest preference.</p> <p><b>Default:</b> install</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Examples: Configuring Static Routes</li> <li>static</li> </ul>



## instance-type

---

<b>Syntax</b>	instance-type virtual-router
<b>Hierarchy Level</b>	[edit <a href="#">routing-instances</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.2 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Specify the type of routing instance.
<b>Options</b>	<b>virtual-router</b> —Virtual router routing instance.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Using Virtual Routing Instances to Route Among VLANs on EX Series Switches</li><li>• Configuring Virtual Routing Instances (CLI Procedure)</li><li>• <a href="#">Configuring Virtual Router Routing Instances on page 2323</a></li></ul>



## interface (Multicast Static Routes)

<b>Syntax</b>	<pre> interface <i>interface-names</i> {     disable;     maximum-bandwidth <i>bps</i>;     no-qos-adjust;     reverse-oif-mapping {         no-qos-adjust;     }     subscriber-leave-timer <i>seconds</i>; } </pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <a href="#">multicast</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <a href="#">multicast</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <a href="#">multicast</a>],</p> <p>[edit routing-options <a href="#">multicast</a>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.1.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Enable multicast traffic on an interface.</p> <p>By default, multicast packets are forwarded by enabling Protocol Independent Multicast (PIM) on an interface. PIM adds multicast routes into the routing table.</p> <p>You can also configure multicast packets to be forwarded over a static route, such as a static route associated with an LSP next hop. Multicast packets are accepted on an interface and forwarded over a static route in the forwarding table. This is useful when you want to enable multicast traffic on a specific interface without configuring PIM on the interface.</p> <p>You cannot enable multicast traffic on an interface and configure PIM on the same interface simultaneously.</p> <p>Static routes must be configured before you can enable multicast on an interface. Configuring the <b>interface</b> statement alone does not install any routes into the routing table. This feature relies on the static route configuration.</p>
<b>Options</b>	<p><b><i>interface-names</i></b>—Name of one or more interfaces on which to enable multicast traffic.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Defining Interface Bandwidth Maximums</li> <li>• Example: Configuring Multicast with Subscriber VLANs</li> </ul>



## interface (Routing Instances)

---

<b>Syntax</b>	<code>interface <i>interface-name</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">routing-instances</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	For virtual router routing instances, configure an interface.



---

**NOTE:**

- You must configure only interfaces from the Node devices assigned to the network Node group. If you try to configure interfaces from the Node devices assigned to server Node groups, the configuration does not commit.
  - You can configure an interface for one routing instance only.
- 

<b>Options</b>	<i>interface-name</i> —Name of an interface.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Virtual Router Routing Instances on page 2323</a></li></ul>



## interface (Routing Options)

<b>Syntax</b>	<pre>interface <i>interface-names</i> {     maximum-bandwidth <i>bps</i>;     no-qos-adjust;     reverse-oif-mapping {         no-qos-adjust;     }     subscriber-leave-timer <i>seconds</i>; }</pre>
<b>Hierarchy Level</b>	<pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options multicast], [edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-instances <i>routing-instance-name</i> routing-options multicast], [edit routing-options multicast]</pre>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.3.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Enable multicast traffic on an interface.



**TIP:** You cannot enable multicast traffic on an interface by using the `routing-options multicast interface` statement and configure PIM on the interface.

<b>Options</b>	<p><b><i>interface-name</i></b>—Names of the physical or logical interface.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Defining Interface Bandwidth Maximums</li> <li>• Example: Configuring Multicast with Subscriber VLANs</li> </ul>



## interface-routes

**Syntax**

```
interface-routes {
    family (inet | inet6) {
        export {
            lan;
            point-to-point;
        }
    }
    rib-group group-name;
}
```

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options],  
[edit logical-systems *logical-system-name* routing-options],  
[edit routing-instances *routing-instance-name* routing-options],  
[edit routing-options]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.



**NOTE:** On EX Series switches, only dynamically learned routes can be imported from one routing table group to another.

**Description** Associate a routing table group with the routing device's interfaces, and specify routing table groups into which interface routes are imported.

By default, IPv4 interface routes (also called direct routes) are imported into routing table **inet.0**, and IPv6 interface routes are imported into routing table **inet6.0**. If you are configuring alternate routing tables for use by some routing protocols, it might be necessary to import the interface routes into the alternate routing tables. To define the routing tables into which interface routes are imported, you create a routing table group and associate it with the routing device's interfaces.

To create the routing table groups, include the **passive** statement at the **[edit routing-options]** hierarchy level.

If you have configured a routing table, configure the OSPF primary instance at the **[edit protocols ospf]** hierarchy level with the statements needed for your network so that routes are installed in **inet.0** and in the forwarding table. Make sure to include the routing table group.

To export local routes, include the **export** statement.

To export LAN routes, include the **lan** option. To export point-to-point routes, include the **point-to-point** option.



Only local routes on point-to-point interfaces configured with a destination address are exportable.

- Options**
- inet**—Specify the IPv4 address family.
  - inet6**—Specify the IPv6 address family.
  - lan**—Export LAN routes.
  - point-to-point**—Export point-to-point routes.

The remaining statements are explained separately.

**Required Privilege Level**

- routing—To view this statement in the configuration.
- routing-control—To add this statement to the configuration.

**Related Documentation**

- Example: Importing Direct and Static Routes Into a Routing Instance
- Example: Configuring Multiple Routing Instances of OSPF
- passive

## local-address (Routing Options)

**Syntax** `local-address address;`

**Hierarchy Level**

```
[edit logical-systems logical-system-name routing-instances routing-instance-name
  routing-options multicast backup-pe-group group-name],
[edit logical-systems logical-system-name routing-options multicast backup-pe-group
  group-name],
[edit routing-instances routing-instance-name routing-options multicast backup-pe-group
  group-name],
[edit routing-options multicast backup-pe-group group-name]
```

**Release Information**

- Statement introduced in Junos OS Release 9.0.
- Statement introduced in Junos OS Release 9.0 for EX Series switches.
- Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Configure the address of the local PE for ingress PE redundancy when point-to-multipoint LSPs are used for multicast distribution.

**Options** **address**—Address of local PEs in the backup group.

**Required Privilege Level**

- routing—To view this statement in the configuration.
- routing-control—To add this statement to the configuration.

**Related Documentation**

- Example: Configuring Ingress PE Redundancy



## martians

<b>Syntax</b>	<pre>martians {     destination-prefix match-type &lt;allow&gt;; }</pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>rib</b> <i>routing-table-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <b>rib</b> <i>routing-table-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <b>rib</b> <i>routing-table-name</i>],</p> <p>[edit routing-options],</p> <p>[edit routing-options <b>rib</b> <i>routing-table-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Configure martian addresses.
<b>Options</b>	<p><b>allow</b>—(Optional) Explicitly allow a subset of a range of addresses that has been disallowed. The <b>allow</b> option is the only supported action.</p> <p><b>destination-prefix</b>—Destination route you are configuring:</p> <ul style="list-style-type: none"> <li><b>destination-prefix/prefix-length—destination-prefix</b> is the network portion of the IP address, and <b>prefix-length</b> is the destination prefix length.</li> <li><b>default</b>—Default route to use when routing packets do not match a network or host in the routing table. This is equivalent to specifying the IP address <b>0.0.0.0/0</b>.</li> </ul> <p><b>match-type</b>—Criteria that the destination must match:</p> <ul style="list-style-type: none"> <li><b>exact</b>—Exactly match the route's mask length.</li> <li><b>longer</b>—The route's mask length is greater than the specified mask length.</li> <li><b>orlonger</b>—The route's mask length is equal to or greater than the specified mask length.</li> <li><b>through destination-prefix</b>—The route matches the first prefix, the route matches the second prefix for the number of bits in the route, and the number of bits in the route is less than or equal to the number of bits in the second prefix.</li> <li><b>upto prefix-length</b>—The route's mask length falls between the two destination prefix lengths, inclusive.</li> </ul>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>



**Related Documentation**

- Example: Configuring Martian Addresses

## maximum-bandwidth (Routing Options)

<b>Syntax</b>	<code>maximum-bandwidth <i>bps</i>;</code>
<b>Hierarchy Level</b>	<p>[edit dynamic-profiles <i>profile-name</i> routing-instances <i>instance-name</i> routing-options multicast interface <i>interface-name</i>],</p> <p>[edit dynamic-profiles <i>profile-name</i> routing-options multicast interface <i>interface-name</i>]</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">interface</a> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <a href="#">interface</a> <i>interface-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">interface</a> <i>interface-name</i>],</p> <p>[edit routing-options multicast <a href="#">interface</a> <i>interface-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.3.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p><b>dynamic-profiles</b> hierarchy level added in Junos OS Release 11.2.</p>
<b>Description</b>	Configure the multicast bandwidth for the interface.
<b>Options</b>	<p><b><i>bps</i></b>—Bandwidth rate, in bits per second, for the multicast interface.</p> <p><b>Range:</b> 0 through any amount of bandwidth</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Defining Interface Bandwidth Maximums</li> </ul>



## maximum-paths

<b>Syntax</b>	<code>maximum-paths <i>path-limit</i> &lt;log-interval <i>seconds</i>&gt; &lt;log-only   threshold <i>value</i>&gt;;</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options], [edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options], [edit routing-options]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.0. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Configure a limit for the number of routes installed in a routing table based upon the route path.



**NOTE:** The `maximum-paths` statement is similar to the `maximum-prefixes` statement. The `maximum-prefixes` statement limits the number of unique destinations in a routing instance. For example, suppose a routing instance has the following routes:

```
OSPF 10.10.10.0/24
ISIS 10.10.10.0/24
```

These are two routes, but only one destination (prefix). The `maximum-paths` limit applies the total number of routes (two). The `maximum-prefixes` limit applies to the total number of unique prefixes (one).

<b>Options</b>	<code>log-interval <i>seconds</i></code> —(Optional) Minimum time interval (in seconds) between log messages. <b>Range:</b> 5 through 86,400
	<code>log-only</code> —(Optional) Sets the route limit as an advisory limit. An advisory limit triggers only a warning, and additional routes are not rejected.
	<code><i>path-limit</i></code> —Maximum number of routes. If this limit is reached, a warning is triggered and additional routes are rejected. <b>Range:</b> 1 through 4,294,967,295 ( $2^{32} - 1$ ) <b>Default:</b> No default
	<code>threshold <i>value</i></code> —(Optional) Percentage of the maximum number of routes that starts triggering a warning. You can configure a percentage of the <code><i>path-limit</i></code> value that starts triggering the warnings. <b>Range:</b> 1 through 100





**NOTE:** When the number of routes reaches the **threshold** value, routes are still installed into the routing table while warning messages are sent. When the number of routes reaches the *path-limit* value, then additional routes are rejected.


**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- Limiting the Number of Paths and Prefixes Accepted from CE Routers in Layer 3 VPNs



## maximum-prefixes

<b>Syntax</b>	<code>maximum-prefixes <i>prefix-limit</i> &lt;log-interval <i>seconds</i>&gt; &lt;log-only   threshold <i>percentage</i>&gt;;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-options]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.0.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Configure a limit for the number of routes installed in a routing table based upon the route prefix.</p> <p>Using a prefix limit, you can curtail the number of prefixes received from a CE router in a VPN. Prefix limits apply only to dynamic routing protocols and are not applicable to static or interface routes.</p> <div style="margin-top: 20px;">  <p><b>NOTE:</b> The <code>maximum-prefixes</code> statement is similar to the <code>maximum-paths</code> statement. The <code>maximum-prefixes</code> statement limits the number of unique destinations in a routing instance. For example, suppose a routing instance has the following routes:</p> <pre> OSPF 10.10.10.0/24 ISIS 10.10.10.0/24 </pre> <p>These are two routes, but only one destination (prefix). The <code>maximum-paths</code> limit applies the total number of routes (two). The <code>maximum-prefixes</code> limit applies to the total number of unique prefixes (one).</p> </div>
<b>Options</b>	<p><b>log-interval <i>seconds</i></b>—(Optional) Minimum time interval (in seconds) between log messages.</p> <p><b>Range:</b> 5 through 86,400</p> <p><b>log-only</b>—(Optional) Sets the prefix limit as an advisory limit. An advisory limit triggers only a warning, and additional routes are not rejected.</p> <p><b><i>prefix-limit</i></b>—Maximum number of route prefixes. If this limit is reached, a warning is triggered and any additional routes are rejected.</p> <p><b>Range:</b> 1 through 4,294,967,295</p> <p><b>Default:</b> No default</p> <p><b>threshold <i>value</i></b>—(Optional) Percentage of the maximum number of prefixes that starts triggering a warning. You can configure a percentage of the <b><i>prefix-limit</i></b> value that starts triggering the warnings.</p>



**Range:** 1 through 100



**NOTE:** When the number of routes reaches the threshold value, routes are still installed into the routing table while warning messages are sent. When the number of routes reaches the *prefix-limit* value, then additional routes are rejected.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- Limiting the Number of Paths and Prefixes Accepted from CE Routers in Layer 3 VPNs

## med-igp-update-interval

**Syntax** med-igp-update-interval *minutes*;

**Hierarchy Level** [edit routing-options]

**Release Information** Statement introduced in Junos OS Release 9.0  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Configure a timer for how long to delay updates for the multiple exit discriminator (MED) path attribute for BGP groups and peers configured with the **metric-out igp offset delay-med-update** statement. The timer delays MED updates for the interval configured unless the MED is lower than the previously advertised attribute or another attribute associated with the route has changed or if the BGP peer is responding to a refresh route request.

**Options** *minutes*—Interval to delay MED updates.  
**Range:** 10 through 600  
**Default:** 10 minutes

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Associating the MED Path Attribute with the IGP Metric and Delaying MED Updates on page 2730](#)
- [metric-out on page 3030](#)



## metric (Aggregate, Generated, or Static Route)

---

<b>Syntax</b>	(metric   metric2   metric3   metric4) <i>metric</i> <type type>;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-options ( <a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)], [edit routing-options ( <a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	Specify the metric value for an aggregate, generated, or static route. You can specify up to four metric values, starting with <b>metric</b> (for the first metric value) and continuing with <b>metric2</b> , <b>metric3</b> , and <b>metric4</b> .
<b>Options</b>	<b>metric</b> —Metric value. <b>Range:</b> 0 through 4,294,967,295 ( $2^{32} - 1$ )  <b>type type</b> —(Optional) Type of route.  When routes are exported to OSPF, type 1 routes are advertised in type 1 externals, and routes of any other type are advertised in type 2 externals. Note that if a qualified-next-hop metric value is configured, this value overrides the route metric. <b>Range:</b> 1 through 16
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Summarizing Static Routes Through Route Aggregation</li><li>• Example: Conditionally Generating Static Routes</li><li>• <a href="#">aggregate on page 2350</a></li><li>• <a href="#">generate on page 2380</a></li><li>• static</li></ul>



## multicast (Routing Options)

**Syntax**

```
multicast {
  forwarding-cache {
    threshold suppress value <reuse value>;
  }
  interface interface-name {
    enable;
  }
  scope scope-name {
    interface [ interface-names ];
    prefix destination-prefix;
  }
  ssm-groups {
    address;
  }
}
```

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options],  
[edit logical-systems *logical-system-name* routing-options],  
[edit routing-instances *routing-instance-name* routing-options],  
[edit routing-options]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.  
Statement introduced in Junos OS Release 12.3 for ACX Series routers.

**Description** Configure generic multicast properties.



**NOTE:** You cannot apply a scoping policy to a specific routing instance. All scoping policies are applied to all routing instances. However, you can apply the `scope` statement to a specific routing instance.

The remaining statements are explained separately.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- Examples: Configuring Administrative Scoping
- [Example: Configuring Source-Specific Multicast Groups with Any-Source Override on page 3788](#)
- Examples: Configuring the Multicast Forwarding Cache
- Multicast Protocols Configuration Guide
- ([indirect-next-hop on page 2384](#) | no-indirect-next-hop)



## no-qos-adjust

---

<b>Syntax</b>	no-qos-adjust;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">interface interface-name</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">interface interface-name</a> <a href="#">reverse-oif-mapping</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <a href="#">interface interface-name</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <a href="#">interface interface-name</a> <a href="#">reverse-oif-mapping</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">interface interface-name</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">interface interface-name</a> <a href="#">reverse-oif-mapping</a>],</p> <p>[edit routing-options multicast <a href="#">interface interface-name</a>],</p> <p>[edit routing-options multicast <a href="#">interface interface-name</a> <a href="#">reverse-oif-mapping</a>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.5.</p> <p>Statement introduced in Junos OS Release 9.5 for EX Series switches.</p> <p>Statement added to [edit routing-instances <i>routing-instance-name</i> routing-options multicast interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast interface <i>interface-name</i>], and [edit routing-options multicast interface <i>interface-name</i>] hierarchy levels in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	Disable hierarchical bandwidth adjustment for all subscriber interfaces that are identified by their MLD or IGMP request from a specific multicast interface.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Example: Configuring Multicast with Subscriber VLANs</li></ul>



## options (Routing Options)

<b>Syntax</b>	options { syslog (level <i>level</i>   upto level <i>level</i> ); }
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options], [edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options], [edit routing-options]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	Configure the types of system logging messages sent about the routing protocols process to the system message logging file. These messages are also displayed on the system console. You can log messages at a particular level, or up to and including a particular level.
<b>Options</b>	<p><b>level <i>level</i></b>—Severity of the message. It can be one or more of the following levels, in order of decreasing urgency:</p> <ul style="list-style-type: none"> <li>• <b>alert</b>—Conditions that should be corrected immediately, such as a corrupted system database.</li> <li>• <b>critical</b>—Critical conditions, such as hard drive errors.</li> <li>• <b>debug</b>—Software debugging messages.</li> <li>• <b>emergency</b>—Panic or other conditions that cause the system to become unusable.</li> <li>• <b>error</b>—Standard error conditions.</li> <li>• <b>info</b>—Informational messages.</li> <li>• <b>notice</b>—Conditions that are not error conditions, but might warrant special handling.</li> <li>• <b>warning</b>—System warning messages.</li> </ul> <p><b>upto level <i>level</i></b>—Log all messages up to a particular level.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <b>syslog</b> in the Junos OS System Basics Configuration Guide</li> </ul>



## pim-to-igmp-proxy

---

<b>Syntax</b>	<pre>pim-to-igmp-proxy {   upstream-interface [ interface-names ]; }</pre>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast], [edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-instances <i>routing-instance-name</i> routing-options multicast], [edit routing-options multicast]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.6. Statement introduced in Junos OS Release 9.6 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	<p>Configure the rendezvous point (RP) routing device that resides between a customer edge-facing Protocol Independent Multicast (PIM) domain and a core-facing PIM domain to translate PIM join or prune messages into corresponding Internet Group Management Protocol (IGMP) report or leave messages. The routing device then transmits the report or leave messages by proxying them to one or two upstream interfaces that you configure on the RP routing device. Including the <b>pim-to-igmp-proxy</b> statement enables you to use IGMP to forward IPv4 multicast traffic across the PIM sparse mode domains.</p> <p>The remaining statement is explained separately.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Configuring PIM-to-IGMP Message Translation</li></ul>



## policy (Aggregate and Generated Routes)

<b>Syntax</b>	<code>policy <i>policy-name</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit routing-options (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>) (defaults   route)]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	<p>Associate a routing policy when configuring an aggregate or generated route's destination prefix in the <b>routes</b> part of the <b>aggregate</b> or <b>generate</b> statement. This provides the equivalent of an import routing policy filter for the destination prefix. That is, each potential contributor to an aggregate route, along with any aggregate options, is passed through the policy filter. The policy then can accept or reject the route as a contributor to the aggregate route.</p> <p>If the contributor is accepted, the policy can modify the default preferences. The contributor with the numerically smallest prefix becomes the most preferred, or <i>primary</i>, contributor. A rejected contributor still can contribute to a less specific aggregate route. If you do not specify a policy filter, all candidate routes contribute to an aggregate route.</p> <p>The following algorithm is used to compare two generated contributing routes in order to determine which one is the primary or preferred contributor:</p> <ol style="list-style-type: none"> <li>1. Compare the protocol's <b>preference</b> of the contributing routes. The lower the preference, the better the route. This is similar to the comparison that is done while determining the best route for the routing table.</li> <li>2. Compare the protocol's <b>preference2</b> of the contributing routes. The lower <b>preference2</b> value is better. If only one route has <b>preference2</b>, then this route is preferred.</li> <li>3. The preference values are the same. Proceed with a numerical comparison of the prefixes' values. <ol style="list-style-type: none"> <li>a. The primary contributor is the numerically smallest prefix value.</li> <li>b. If the two prefixes are numerically equal, the primary contributor is the route that has the smallest prefix length value.</li> </ol> </li> </ol>



At this point, the two routes are the same. The primary contributor does not change. An additional next hop is available for the existing primary contributor.

A rejected contributor still can contribute to less specific generated route. If you do not specify a policy filter, all candidate routes contribute to a generated route.

<b>Options</b>	<i>policy-name</i> —Name of a routing policy.
<b>Required Privilege</b>	routing—To view this statement in the configuration.
<b>Level</b>	routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Summarizing Routes Through Route Aggregation</li><li>• Example: Conditionally Generating Static Routes</li><li>• <a href="#">aggregate on page 2350</a></li><li>• <a href="#">generate on page 2380</a></li></ul>

---

## policy (Flow Maps)

---

<b>Syntax</b>	<code>policy [ <i>policy-names</i> ];</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">flow-map</a> <i>flow-map-name</i> ], [edit logical-systems <i>logical-system-name</i> routing-options multicast <a href="#">flow-map</a> <i>flow-map-name</i> ], [edit routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">flow-map</a> <i>flow-map-name</i> ], [edit routing-options multicast <a href="#">flow-map</a> <i>flow-map-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.2. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	Configure a flow map policy.
<b>Options</b>	<i>policy-names</i> —Name of one or more policies for flow mapping.
<b>Required Privilege</b>	routing—To view this statement in the configuration.
<b>Level</b>	



## policy-options

```
Syntax  policy-options
        application-maps application-map-name {
            application application-name {
                code-points [ aliases ] [ bit-patterns ];
            }
        }
        policy-statement policy-name {
            term term-name {
                from {
                    family family-name;
                    match-conditions;
                    policy subroutine-policy-name;
                    prefix-list prefix-list-name;
                    prefix-list-filter prefix-list-name match-type <actions>;
                    route-filter destination-prefix match-type <actions>;
                    source-address-filter source-prefix match-type <actions>;
                }
                to {
                    match-conditions;
                    policy subroutine-policy-name;
                }
                then actions;
            }
        }
    }
```

**Hierarchy Level** [edit]

**Release Information** Statement introduced in Junos OS Release 12.1 for the QFX Series.  
Statement introduced in Junos OS Release 12.1 for the EX Series.

**Description** Configure options such as application maps for DCBX application protocol exchange and policy statements.

**Required Privilege Level** storage—To view this statement in the configuration.  
storage-control—To add this statement to the configuration.

**Related Documentation**

- [Defining an Application for DCBX Application Protocol TLV Exchange on page 4604](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)
- [Example: Configuring DCBX to Support an iSCSI Application](#)
- [Understanding DCBX Application Protocol TLV Exchange on page 4472](#)
- [Understanding DCBX Application Protocol TLV Exchange on EX Series Switches](#)



## policy-statement

<b>Syntax</b>	<pre> policy-statement <i>policy-name</i> {   term <i>term-name</i> {     from {       family <i>family-name</i>;       match-conditions;       policy <i>subroutine-policy-name</i>;       prefix-list <i>prefix-list-name</i>;       prefix-list-filter <i>prefix-list-name</i> match-type &lt;actions&gt;;       route-filter <i>destination-prefix</i> match-type &lt;actions&gt;;       source-address-filter <i>source-prefix</i> match-type &lt;actions&gt;;     }     to {       match-conditions;       policy <i>subroutine-policy-name</i>;     }     then <i>actions</i>;   } } </pre>
<b>Hierarchy Level</b>	<p>[edit dynamic policy-options],  [edit logical-systems <i>logical-system-name</i> policy-options],  [edit policy-options]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.  Statement introduced in Junos OS Release 9.0 for EX Series switches.  Support for configuration in the dynamic database introduced in Junos OS Release 9.5.  Support for configuration in the dynamic database introduced in Junos OS Release 9.5 for EX Series switches.  <b>inet-mdt</b> option introduced in Junos OS Release 10.0R2.  Statement introduced in Junos OS Release 11.3 for the QFX Series.  <b>route-target</b> option introduced in Junos OS Release 12.2.</p>
<b>Description</b>	<p>Define a routing policy, including subroutine policies.</p> <p>To list the routing policies under the <b>[edit policy-options]</b> hierarchy level by <b>policy-statement <i>policy-name</i></b> in alphabetical order, enter the <b>show policy-options</b> configuration command.</p>
<b>Options</b>	<p><b>actions</b>—(Optional) One or more actions to take if the conditions match. The actions are described in Configuring Flow Control Actions.</p> <p><b>family <i>family-name</i></b>—(Optional) Specify an address family protocol. Specify <b>inet</b> for IPv4. Specify <b>inet6</b> for 128-bit IPv6, and to enable interpretation of IPv6 router filter addresses. For IS-IS traffic, specify <b>iso</b>. For IPv4 multicast VPN traffic, specify <b>inet-mvpn</b>. For IPv6 multicast VPN traffic, specify <b>inet6-mvpn</b>. For multicast-distribution-tree (MDT) IPv4 traffic, specify <b>inet-mdt</b>. For BGP route target VPN traffic, specify <b>route-target</b>.</p>





**NOTE:** When **family** is not specified, the routing device or routing instance uses the address family or families carried by BGP. If multiprotocol BGP (MP-BGP) is enabled, the policy defaults to the protocol family or families carried in the network layer reachability information (NLRI) as configured in the **family** statement for BGP. If MP-BGP is not enabled, the policy uses the default BGP address family unicast IPv4.

**from**—(Optional) Match a route based on its source address.

**match-conditions**—(Optional in **from** statement; required in **to** statement) One or more conditions to use to make a match. The qualifiers are described in Configuring Match Conditions in Routing Policy Terms.

**policy subroutine-policy-name**—Use another policy as a match condition within this policy. The name identifying the subroutine policy can contain letters, numbers, and hyphens (-) and can be up to 255 characters long. To include spaces in the name, enclose it in quotation marks (" "). Policy names cannot take the form **\_\_.\*-internal\_\_**, as this form is reserved. For information about how to configure subroutines, see Configuring Subroutines in Routing Policy Match Conditions.

**policy-name**—Name that identifies the policy. The name can contain letters, numbers, and hyphens (-) and can be up to 255 characters long. To include spaces in the name, enclose it in quotation marks (" ").

**prefix-list prefix-list-name** —Name of a list of IPv4 or IPv6 prefixes.

**prefix-list-filter prefix-list-name**—Name of a prefix list to evaluate using qualifiers; **match-type** is the type of match (see Configuring Prefix List Filters), and **actions** is the action to take if the prefixes match.

**route-filter destination-prefix match-type <actions>**—(Optional) List of routes on which to perform an immediate match; **destination-prefix** is the IPv4 or IPv6 route prefix to match, **match-type** is the type of match (see Configuring Route Lists), and **actions** is the action to take if the **destination-prefix** matches.

**source-address-filter source-prefix match-type <actions>**—(Optional) Unicast source addresses in multiprotocol BGP (MBGP) and Multicast Source Discovery Protocol (MSDP) environments on which to perform an immediate match. **source-prefix** is the IPv4 or IPv6 route prefix to match, **match-type** is the type of match (see Configuring Route Lists), and **actions** is the action to take if the **source-prefix** matches.

**term term-name**—Name that identifies the term.

**to**—(Optional) Match a route based on its destination address or the protocols into which the route is being advertised.

**then**—(Optional) Actions to take on matching routes. The actions are described in Configuring Flow Control Actions and Configuring Actions That Manipulate Route Characteristics.



<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Defining Routing Policies</li><li>Configuring Routing Policies and Policy Objects in the Dynamic Database</li><li>dynamic-db</li></ul>

---

## ppm

---

<b>Syntax</b>	<pre>ppm {     no-delegate-processing; }</pre>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-options]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.4. Statement introduced in Junos OS Release 10.2 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	<p>(M120, M320, MX Series, T Series, TX Matrix routers, M7i and M10i routers with Enhanced CFEB [CFEB-E], EX Series switches, and QFX Series only) Disable distributed periodic packet management (PPM) to the Packet Forwarding Engine (on routers), to access ports (on EX3200 and EX4200 switches, and QFX Series), or to line cards (on EX6200 and EX8200 switches).</p> <p>After you disable PPM, PPM processing continues to run on the Routing Engine.</p> <p>In Junos OS Release 8.2, PPM was moved from the Routing Engine to the Packet Forwarding Engine, access ports, or line cards. The <b>no-delegate-processing</b> statement disables the default behavior and restores the legacy behavior.</p>
<b>Default</b>	Distributed PPM processing is enabled for all protocols that use PPM.
<b>Options</b>	<b>no-delegate-processing</b> —Disable PPM to the Packet Forwarding Engine, access ports, or line cards. Distributed PPM is enabled by default.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Configuring Distributed Periodic Packet Management on an EX Series Switch (CLI Procedure)</li><li><a href="#">Configuring Distributed Periodic Packet Management on page 2322</a></li></ul>



## ppm (Ethernet Switching)

<b>Syntax</b>	ppm { centralized; }
<b>Hierarchy Level</b>	[edit protocols lacp]
<b>Release Information</b>	Statement introduced in Junos OS Release 10.2 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.1 for T Series devices.
<b>Description</b>	Configure PPM processing options for Link Aggregation Control Protocol (LACP) packets.  This command configures the PPM processing options for LACP packets only. You can disable distributed PPM processing for all packets that use PPM and run all PPM processing on the Routing Engine by configuring the <b>no-delegate-processing</b> configuration statement in the [edit routing-options ppm] statement hierarchy.
<b>Default</b>	Distributed PPM processing is enabled for all packets that use PPM.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Configuring Distributed Periodic Packet Management on an EX Series Switch (CLI Procedure)</li> <li><a href="#">Configuring Distributed Periodic Packet Management on page 2322</a></li> </ul>



## preference (Routing Options)

<b>Syntax</b>	<code>(preference   preference2   color   color2) preference &lt;type type&gt;;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	<p>Preference value for a static, aggregate, or generated route. You also can specify a secondary preference value (<b>preference2</b>), as well as colors, which are even finer-grained preference values (<b>color</b> and <b>color2</b>).</p> <p>If the Junos OS routing table contains a dynamic route to a destination that has a better (lower) preference value than the static, aggregate, or generated route, the dynamic route is chosen as the active route and is installed in the forwarding table.</p>
<b>Options</b>	<p><b>preference</b>—Preference value. A lower number indicates a more preferred route.</p> <p><b>Range:</b> 0 through 4,294,967,295 (<math>2^{32} - 1</math>)</p> <p><b>Default:</b> 5 (for static routes), 130 (for aggregate and generated routes)</p> <p><b>type type</b>—(Optional) Type of route.</p> <p><b>Range:</b> 1 through 16</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Examples: Configuring Static Routes</li> <li>Example: Summarizing Routes Through Route Aggregation</li> <li>Example: Conditionally Generating Static Routes</li> <li><a href="#">aggregate on page 2350</a></li> <li><a href="#">generate on page 2380</a></li> <li>static</li> </ul>



## prefix

---

<b>Syntax</b>	<code>prefix destination-prefix;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <b>scope</b> <i>scope-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <b>scope</b> <i>scope-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <b>scope</b> <i>scope-name</i>],</p> <p>[edit routing-options multicast <b>scope</b> <i>scope-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	Configure the prefix for multicast scopes.
<b>Options</b>	<b>destination-prefix</b> —Address range for the multicast scope.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Examples: Configuring Administrative Scoping</li> <li>Example: Creating a Named Scope for Multicast Scoping</li> <li>multicast</li> </ul>



## protocols

---

```
Syntax protocols {
    bgp {
        ... bgp-configuration ...
    }
    isis {
        ... isis-configuration ...
    }
    ldp {
        ... ldp-configuration ...
    }
    msdp {
        ... msdp-configuration ...
    }
    mstp {
        ... mstp-configuration ...
    }
    ospf {
        domain-id domain-id;
        domain-vpn-tag number;
        route-type-community (iana | vendor);
        ... ospf-configuration ...
    }
    ospf3 {
        domain-id domain-id;
        domain-vpn-tag number;
        route-type-community (iana | vendor);
        ... ospf3-configuration ...
    }
    pim {
        ... pim-configuration ...
    }
    rip {
        ... rip-configuration ...
    }
    ripng {
        ... ripng-configuration ...
    }
    rstp {
        rstp-configuration;
    }
    vstp {
        vstp configuration;
    }
    vpls {
        vpls configuration;
    }
}
```

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name*],  
[edit routing-instances *routing-instance-name*]

**Release Information** Statement introduced before Junos OS Release 7.4.



Support for RIPv6 introduced in Junos OS Release 9.0.  
 Statement introduced in Junos OS Release 11.1 for EX Series switches.  
 Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Specify the protocol for a routing instance. You can configure multiple instances of many protocol types. Not all protocols are supported on the switches. See the switch CLI.

**Options** **bgp**—Specify BGP as the protocol for a routing instance.

**isis**—Specify IS-IS as the protocol for a routing instance.

**ldp**—Specify LDP as the protocol for a routing instance.

**l2vpn**—Specify Layer 2 VPN as the protocol for a routing instance.

**msdp**—Specify the Multicast Source Discovery Protocol (MSDP) for a routing instance.

**mstp**—Specify the Multiple Spanning Tree Protocol (MSTP) for a virtual switch routing instance.

**ospf**—Specify OSPF as the protocol for a routing instance.

**ospf3**—Specify OSPF version 3 (OSPFv3) as the protocol for a routing instance.



**NOTE:** OSPFv3 supports the **no-forwarding**, **virtual-router**, and **vrf** routing instance types only.

**pim**—Specify the Protocol Independent Multicast (PIM) protocol for a routing instance.

**rip**—Specify RIP as the protocol for a routing instance.

**ripng**—Specify RIP next generation (RIPv6) as the protocol for a routing instance.

**rstp**—Specify the Rapid Spanning Tree Protocol (RSTP) for a virtual switch routing instance.

**vstp**—Specify the VLAN Spanning Tree Protocol (VSTP) for a virtual switch routing instance.

**vpls**—Specify VPLS as the protocol for a routing instance.

**Required Privilege Level** routing—To view this statement in the configuration.  
 routing-control—To add this statement to the configuration.

**Related Documentation**

- Example: Configuring Multiple Routing Instances of OSPF



## qualified-next-hop (Static Routes)

**Syntax** `qualified-next-hop (address | interface-name) {  
     bfd-liveness-detection {  
         authentication {  
             algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 | meticulous-keyed-sha-1 |  
                 simple-password);  
             key-chain key-chain-name;  
             loose-check;  
         }  
         detection-time {  
             threshold milliseconds;  
         }  
         holddown-interval milliseconds;  
         minimum-interval milliseconds;  
         minimum-receive-interval milliseconds;  
         multiplier number;  
         no-adaptation;  
         transmit-interval {  
             minimum-interval milliseconds;  
             threshold milliseconds;  
         }  
         version (1 | automatic);  
     }  
     interface interface-name;  
     metric metric;  
     preference preference;  
}`

**Hierarchy Level** `[edit logical-systems logical-system-name routing-instances routing-instance-name  
     routing-options static route destination-prefix],  
     [edit logical-systems logical-system-name routing-options rib inet6.0 static route  
         destination-prefix],  
     [edit logical-systems logical-system-name routing-options static route destination-prefix],  
     [edit routing-instances routing-instance-name routing-options static route destination-prefix],  
     [edit routing-options rib inet6.0 static route destination-prefix],  
     [edit routing-options static route destination-prefix]`

**Release Information** Statement introduced before Junos OS Release 7.4.  
 Statement introduced in Junos OS Release 9.0 for EX Series switches.  
 Statement introduced in Junos OS Release 11.3 for the QFX Series.  
 Statement introduced in Junos OS Release 12.3 for ACX Series routers.

**Description** Configure a static route with multiple possible next hops, each of which can have its own preference value, IGP metric that is used when the route is exported into an IGP, and Bidirectional Forwarding Detection (BFD) settings. If multiple links are operational, the one with the most preferred next hop is used. The most preferred next hop is the one with the lowest preference value.

**Options** *address*—IPv4, IPv6, or ISO network address of the next hop.

*interface-name*—Name of the interface on which to configure an independent metric or preference for a static route. To configure an unnumbered interface as the next-hop



interface for a static route, specify **qualified-next-hop *interface-name***, where *interface-name* is the name of the IPv4 or IPv6 unnumbered interface.



**NOTE:** For an Ethernet interface to be configured as the qualified next hop for a static route, it must be an unnumbered interface.

To configure an Ethernet interface as an unnumbered interface, configure the `unnumbered-address <interface-name>` statement at the [edit interfaces <interface-name> unit <logical-unit-number> family <family-name>] hierarchy level as described in [Configuring an Unnumbered Interface](#).

The remaining statements are explained separately.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Static Route Preferences and Qualified Next Hops</a></li> <li>• <a href="#">Example: Enabling BFD on Qualified Next Hops in Static Routes on page 2334</a></li> </ul>



## readvertise

---

<b>Syntax</b>	(readvertise   no-readvertise);
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options static (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> static (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-options static (defaults   route)], [edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static (defaults   route)], [edit routing-instances <i>routing-instance-name</i> routing-options static (defaults   route)], [edit routing-options rib <i>routing-table-name</i> static (defaults   route)], [edit routing-options static (defaults   route)]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	Configure whether static routes are eligible to be readvertised by routing protocols:
<b>Default</b>	Static routes are eligible to be readvertised (that is, exported from the routing table into dynamic routing protocols) if a policy to do so is configured. To mark an IPv4 static route as being ineligible for readvertisement, include the <b>no-readvertise</b> statement.
<b>Options</b>	<b>readvertise</b> —Readvertise static routes. Include the <b>readvertise</b> statement when configuring an individual route in the <b>route</b> portion of the <b>static</b> statement to override a <b>no-readvertise</b> option specified in the <b>defaults</b> portion of the statement.  <b>no-readvertise</b> —Mark a static route as being ineligible for readvertisement. Include the <b>no-readvertise</b> option when configuring the route.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Controlling Static Routes in Routing and Forwarding Tables</li><li>• static</li></ul>




## redundant-sources

---

<b>Syntax</b>	<code>redundant-sources [ <i>addresses</i> ];</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i>],</p> <p>[edit routing-options multicast <b>flow-map</b> <i>flow-map-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.3.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Configure a list of redundant sources for multicast flows defined by a flow map.
<b>Options</b>	<b><i>addresses</i></b> —List of IPv4 or IPv6 addresses for use as redundant (backup) sources for multicast flows defined by a flow map.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Example: Configuring a Multicast Flow Map</li> </ul>



## resolution

<b>Syntax</b>	<pre> resolution {     rib routing-table-name {         import [ policy-names ];         resolution-ribs [ routing-table-names ];     } } </pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-options]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Configure the router to perform custom route resolution on protocol next hops of routes in a certain routing table. The protocol next hop is used to determine the forwarding next-hop.</p> <p>For example, you might want to direct <b>inet.2</b> route resolution to use topology routing tables <b>:red.inet.0</b> and <b>:blue.inet.0</b> for protocol next-hop IP address lookups. Or you might want to direct <b>bgp.l3vpn.0</b> to use the information in <b>inet.0</b> to resolve routes, thus overriding the default behavior, which is to use <b>inet.3</b>.</p> <p>You can specify up to two routing tables in the <b>resolution-ribs</b> statement. The route resolution scheme first checks the first-listed routing table for the protocol next-hop address. If the address is found, it uses this entry. If it is not found, the resolution scheme checks second-listed routing table. Hence, only one routing table is used for each protocol nexthop address. For example, if you configure <b>resolution rib bgp.l3vpn.0 resolution-ribs [inet.0 inet.3]</b>, <b>inet.0</b> is checked first and then <b>inet.3</b> is checked.</p> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 10px;"> <p> <b>NOTE:</b> Customizing route resolution might cause the routing protocol process (rpd) to consume more memory resources than it ordinarily would. When you customize route resolution, we recommend that you check the memory resources by running the <b>show system processes</b> and the <b>show task memory</b> commands. For more information, see Routing Protocol Process Memory FAQs.</p> </div> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>



- Related Documentation**
- Example: Configuring Route Resolution on PE Routers
  - Example: Configuring Route Resolution on Route Reflectors
  - Example: Configuring Multitopology Routing Based on a Multicast Source

## resolution-ribs

<b>Syntax</b>	<code>resolution-ribs [ <i>routing-table-names</i> ];</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options resolution <a href="#">rib</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options resolution <a href="#">rib</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options resolution <a href="#">rib</a>],</p> <p>[edit routing-options resolution <a href="#">rib</a>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Specify one or more routing tables to use for route resolution.</p> <p>This statement enables you to override the default routing tables that Junos OS uses for route resolution. For example, suppose that the resolution routing table is <b>inet.3</b>, but you want to allow fallback resolution through <b>inet.0</b>. One example use case is overriding the <b>bgp.rtarget.0 (family route-target)</b> routing table resolution from using only <b>inet.3</b> to using both <b>inet.3</b> and <b>inet.0</b>.</p>
<b>Options</b>	<b><i>routing-table-names</i></b> —Name of one or more routing tables.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Configuring Route Resolution on PE Routers</li> <li>• Example: Configuring Multitopology Routing Based on a Multicast Source</li> </ul>



## resolve

---

<b>Syntax</b>	resolve;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options static (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> static (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-options static (defaults   route)], [edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static (defaults   route)], [edit routing-instances <i>routing-instance-name</i> routing-options static (defaults   route)], [edit routing-options rib <i>routing-table-name</i> static (defaults   route)], [edit routing-options static (defaults   route)]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Statically configure routes to be resolved to a next hop that is not directly connected. The route is resolved through the <b>inet.0</b> and <b>inet.3</b> routing tables.
<b>Default</b>	Static routes can point only to a directly connected next hop.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>static</li></ul>



## retain

<b>Syntax</b>	(no-retain   retain);
<b>Hierarchy Level</b>	<pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options rib <i>routing-table-name</i> static (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options static (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> static   (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-options static (defaults   route)], [edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static   (defaults   route)], [edit routing-instances <i>routing-instance-name</i> routing-options static (defaults   route)], [edit routing-options rib <i>routing-table-name</i> static (defaults   route)], [edit routing-options static (defaults   route)]</pre>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Configure statically configured routes to be deleted from or retained in the forwarding table when the routing protocol process shuts down normally:
<b>Default</b>	Statically configured routes are deleted from the forwarding table when the routing protocol process shuts down normally. Doing this greatly reduces the time required to restart a system that has a large number of routes in its routing table.
<b>Options</b>	<p><b>no-retain</b>—Delete statically configured routes from the forwarding table when the routing protocol process shuts down normally. To explicitly specify that routes be deleted from the forwarding table, include the <b>no-retain</b> statement. Include this statement when configuring an individual route in the <b>route</b> portion of the <b>static</b> statement to override a <b>retain</b> option specified in the <b>defaults</b> portion of the statement.</p> <p><b>retain</b>—Have a static route remain in the forwarding table when the routing protocol process shuts down normally. Doing this greatly reduces the time required to restart a system that has a large number of routes in its routing table.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Examples: Configuring Static Routes</li> <li>static</li> </ul>



## reverse-oif-mapping

---

<b>Syntax</b>	<code>reverse-oif-mapping {     no-qos-adjust; }</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">interface</a> <i>interface-name</i> ], [edit logical-systems <i>logical-system-name</i> routing-options multicast <a href="#">interface</a> <i>interface-name</i> ], [edit routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">interface</a> <i>interface-name</i> ], [edit routing-options multicast <a href="#">interface</a> <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.2. Statement introduced in Junos OS Release 9.2 for EX Series switches. The <b>no-qos-adjust</b> statement added in Junos OS Release 9.5. The <b>no-qos-adjust</b> statement introduced in Junos OS Release 9.5 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Enable the routing device to identify a subscriber VLAN or interface based on an IGMP or MLD request it receives over the multicast VLAN.  The remaining statement is explained separately.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Configuring Multicast with Subscriber VLANs</li></ul>



## rpf-check-policy (Routing Options RPF)

<b>Syntax</b>	<code>rpf-check-policy [ <i>policy-names</i> ];</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit routing-options multicast]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.1.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	Apply policies for disabling RPF checks on arriving multicast packets. The policies must be correctly configured.
<b>Options</b>	<i>policy-names</i> —Name of one or more multicast RPF check policies.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Example: Configuring RPF Policies</li> </ul>



## rib (General)

---

```
Syntax  rib routing-table-name {  
        aggregate {  
            defaults {  
                ... aggregate-options ...  
            }  
            route destination-prefix {  
                policy policy-name;  
                ... aggregate-options ...  
            }  
        }  
        generate {  
            defaults {  
                generate-options;  
            }  
            route destination-prefix {  
                policy policy-name;  
                generate-options;  
            }  
        }  
        martians {  
            destination-prefix match-type <allow>;  
        }  
    }  
    static {  
        defaults {  
            static-options;  
        }  
        rib-group group-name;  
        route destination-prefix {  
            next-hop;  
            static-options;  
        }  
    }  
}
```

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options],  
[edit logical-systems *logical-system-name* routing-options],  
[edit routing-instances *routing-instance-name* routing-options],  
[edit routing-options]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Create a routing table.

Explicitly creating a routing table with ***routing-table-name*** is optional if you are not adding any static, martian, aggregate, or generated routes to the routing table and if you also are creating a routing table group.





**NOTE:** The IPv4 multicast routing table (`inet.1`) and the IPv6 multicast routing table (`inet6.1`) are not supported for this statement.

**Default** If you do not specify a routing table name with the *routing-table-name* option, the software uses the default routing tables, which are `inet.0` for unicast routes and `inet.1` for the multicast cache.

**Options** *routing-table-name*—Name of the routing table, in the following format:  
*protocol [.identifier]*.

In a routing instance, the routing table name must include the routing instance name.

For example, if the routing instance name is `link0`, the routing table name might be `link0.inet6.0`.

- *protocol* is the protocol family. It can be `inet6` for the IPv6 family, `inet` for the IPv4 family, `iso` for the ISO protocol family, or *instance-name.iso.0* for an ISO routing instance.
- *identifier* is a positive integer that specifies the instance of the routing table.

**Default:** `inet.0`

The remaining statements are explained separately.

**Required Privilege Level** `routing`—To view this statement in the configuration.  
`routing-control`—To add this statement to the configuration.

**Related Documentation**

- Example: Creating Routing Tables
- passive



## rib (Route Resolution)

---

<b>Syntax</b>	<pre>rib <i>routing-table-name</i> {     <b>import</b> [ <i>policy-names</i> ];     <b>resolution-ribs</b> [ <i>routing-table-names</i> ]; }</pre>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>resolution</b> ], [edit logical-systems <i>logical-system-name</i> routing-options <b>resolution</b> ], [edit routing-instances <i>routing-instance-name</i> routing-options <b>resolution</b> ], [edit routing-options <b>resolution</b> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Specify a routing table name for route resolution.  The remaining statements are explained separately.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Configuring Route Resolution on PE Routers</li></ul>



## rib-group (Routing Options)

<b>Syntax</b>	<code>rib-group <i>group-name</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <a href="#">interface-routes</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <a href="#">interface-routes</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> static],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options static],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <a href="#">interface-routes</a>],</p> <p>[edit routing-options <a href="#">interface-routes</a>],</p> <p>[edit routing-options rib <i>routing-table-name</i> static],</p> <p>[edit routing-options static]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Configure which routing table groups interface routes are imported into.
<b>Options</b>	<p><b><i>group-name</i></b>—Name of the routing table group. The name must start with a letter and can include letters, numbers, and hyphens. It generally does not make sense to specify more than a single routing table group.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Importing Direct and Static Routes Into a Routing Instance</li> <li>• Example: Exporting Specific Routes from One Routing Table Into Another Routing Table</li> <li>• <a href="#">interface-routes on page 2390</a></li> <li>• <a href="#">rib-groups on page 2428</a></li> </ul>



## rib-groups

---

Syntax	<pre>rib-groups {   group-name {     export-rib group-name;     import-policy [ policy-names ];     import-rib [ group-names ];   } }</pre>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-options]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
Description	<p>Group one or more routing tables to form a routing table group. A routing protocol can import routes into all the routing tables in the group and can export routes from a single routing table.</p> <p>Each routing table group must contain one or more routing tables that Junos OS uses when importing routes (specified in the <b>import-rib</b> statement) and optionally can contain one routing table group that Junos OS uses when exporting routes to the routing protocols (specified in the <b>export-rib</b> statement).</p> <p>The first routing table you specify is the <i>primary routing table</i>, and any additional routing tables are the <i>secondary routing tables</i>.</p> <p>The primary routing table determines the address family of the routing table group. To configure an IP version 4 (IPv4) routing table group, specify <b>inet.0</b> as the primary routing table. To configure an IP version 6 (IPv6) routing table group, specify <b>inet6.0</b> as the primary routing table. If you configure an IPv6 routing table group, the primary and all secondary routing tables must be IPv6 routing tables (<b>inet6.x</b>).</p> <p>In Junos OS Release 9.5 and later, you can include both IPv4 and IPv6 routing tables in an IPv4 import routing table group using the <b>import-rib</b> statement. In releases prior to Junos OS Release 9.5, you can only include either IPv4 or IPv6 routing tables in the same <b>import-rib</b> statement. The ability to configure an import routing table group with both IPv4 and IPv6 routing tables enables you, for example, to populate the <b>inet6.3</b> routing table with IPv6 addresses that are compatible with IPv4. Specify <b>inet.0</b> as the primary routing table, and specify <b>inet6.3</b> as a secondary routing table.</p>



**NOTE:** On EX Series switches, only dynamically learned routes can be imported from one routing table group to another.





**NOTE:** If you configure an import routing table group that includes both IPv4 and IPv6 routing tables, any corresponding export routing table group must include only IPv4 routing tables.

If you have configured a routing table, configure the OSPF primary instance at the **[edit protocols ospf]** hierarchy level with the statements needed for your network so that routes are installed in **inet.0** and in the forwarding table. Make sure to include the routing table group. For more information, see Example: Configuring Multiple Routing Instances of OSPF.

After specifying the routing table from which to import routes, you can apply one or more policies to control which routes are installed in the routing table group. To apply a policy to routes being imported into the routing table group, include the **import-policy** statement.

**Options** *group-name*—Name of the routing table group. The name must start with a letter and can include letters, numbers, and hyphens.

The remaining statements are explained separately.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- Example: Exporting Specific Routes from One Routing Table Into Another Routing Table
- [rib-group on page 2427](#)




## route-record

---

<b>Syntax</b>	route-record;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-options]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Export the AS path and routing information to the traffic sampling process.  Before you can perform flow aggregation, the routing protocol process must export the AS path and routing information to the sampling process.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Enabling Flow Aggregation</li><li>• Junos Services Interfaces Configuration Release 11.2</li></ul>



## router-id

<b>Syntax</b>	<code>router-id address;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-options]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	<p>Specify the routing device's IP address.</p> <p>The router identifier is used by BGP and OSPF to identify the routing device from which a packet originated. The router identifier usually is the IP address of the local routing device. If you do not configure a router identifier, the IP address of the first interface to come online is used. This is usually the loopback interface. Otherwise, the first hardware interface with an IP address is used.</p>
	<div>  <p><b>NOTE:</b> We strongly recommend that you configure the router identifier under the [edit routing-options] hierarchy level to avoid unpredictable behavior if the interface address on a loopback interface changes.</p> </div>
	<p>For more information about the router identifier in OSPF, see <a href="#">“Example: Configuring an OSPF Router Identifier”</a> on page 3294.</p>
<b>Options</b>	<p><b>address</b>—IP address of the routing device.</p> <p><b>Default:</b> Address of the first interface encountered by Junos OS</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Examples: Configuring External BGP Peering on page 2643</a></li> <li>• <a href="#">Examples: Configuring Internal BGP Peering on page 2666</a></li> </ul>



## routing-instances

---

<b>Syntax</b>	<code>routing-instances <i>routing-instance-name</i> {     description;     instance-type virtual-router;     interface <i>interface-name</i>;     protocols;     routing-options }</code>
<b>Hierarchy Level</b>	[edit]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	(QFabric switches only) Configure a virtual router routing instance.
<b>Options</b>	<i>routing-instance-name</i> —Name of this routing instance.  The remaining statements are explained separately.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Virtual Router Routing Instances on page 2323</a></li></ul>

## routing-options

---

<b>Syntax</b>	<code>routing-options { ... }</code>
<b>Hierarchy Level</b>	[edit], [edit routing-instances <i>routing-instance-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Configure protocol-independent routing properties.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.



## scope

---

<b>Syntax</b>	<pre>scope scope-name {     interface [ interface-names ];     prefix destination-prefix; }</pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit routing-options multicast]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	Configure multicast scoping.
<b>Options</b>	<p><b><i>scope-name</i></b>—Name of the multicast scope.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Example: Creating a Named Scope for Multicast Scoping</li> </ul>



## scope-policy

---

**Syntax** `scope-policy [ policy-names ];`

**Hierarchy Level** `[edit logical-systems logical-system-name routing-options multicast],`  
`[edit routing-options multicast]`



**NOTE:** You can configure a scope policy at these two hierarchy levels only. You cannot apply a scope policy to a specific routing instance, because all scoping policies are applied to all routing instances. However, you can apply the `scope` statement to a specific routing instance at the `[edit routing-instances routing-instance-name routing-options multicast]` or `[edit logical-systems logical-system-name routing-instances routing-instance-name routing-options multicast]` hierarchy level.

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.  
Statement introduced in Junos OS Release 12.3 for ACX Series routers.

**Description** Apply policies for scoping. The policy must be correctly configured at the `edit policy-options policy-statement` hierarchy level.

**Options** *policy-names*—Name of one or more multicast scope policies.


**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [scope on page 2433](#)
- Example: Using a Scope Policy for Multicast Scoping



## source-routing

<b>Syntax</b>	source-routing { (ip   ipv6) }
<b>Hierarchy Level</b>	[edit routing-options]
<b>Release Information</b>	Statement for IPv6 introduced in Junos OS Release 8.2. Statement for IPv4 introduced in Junos OS Release 8.5. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	<p>Enable source routing.</p> <p>Source routing allows a sender of a packet to partially or completely specify the route the packet takes through the network. In contrast, in non-source routing protocols, routers in the network determine the path based on the packet's destination.</p> <div>  <p><b>NOTE:</b> We recommend that you not use source routing. Instead, we recommend that you use policy-based routing or filter-based forwarding to route packets based on source addresses.</p> </div>
<b>Default</b>	Disabled
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Example: Configuring Filter-Based Forwarding on the Source Address</li> </ul>



## static (Routes)

---

Syntax	<pre>static {   defaults {     static-options;   }   rib-group group-name;   route destination-prefix {     next-hop address;     next-hop options;     qualified-next-hop address {       metric metric;       preference preference;     }     static-options;   } }</pre>
Hierarchy Level	[edit routing-options], [edit routing-options rib <i>routing-table-name</i> ]
Release Information	Statement introduced in Junos OS Release 11.1 for the QFX Series.
Description	Configure static routes to be installed in the routing table. You can specify any number of routes within a single <b>static</b> statement, and you can specify any number of <b>static</b> options in the configuration.
Options	<p><b>defaults</b>—Specify global static route options. These options only set default attributes inherited by all newly created static routes. These are treated as global defaults and apply to all the static routes you configure in the <b>static</b> statement. This part of the <b>static</b> statement is optional.</p> <p><b>route destination-prefix</b>—Destination of the static route.</p> <ul style="list-style-type: none"><li>• <b>defaults</b>—For the default route to the destination. This is equivalent to specifying an IP address of <b>0.0.0.0/0</b>.</li><li>• <b>destination-prefix/prefix-length</b>—<b>destination-prefix</b> is the network portion of the IP address, and <b>prefix-length</b> is the destination prefix length.</li><li>• <b>next-hop address</b>—Reach the next-hop routing device by specifying an IP address, an interface name, or an ISO network entity title (NET).</li><li>• <b>nsap-prefix</b>—<b>nsap-prefix</b> is the network service access point (NSAP) address for ISO.</li></ul> <p><b>next-hop options</b>—Additional information for how to manage forwarding of packets to the next hop.</p> <ul style="list-style-type: none"><li>• <b>discard</b>—Do not forward packets addressed to this destination. Instead, drop the packets, do not send ICMP unreachable messages to the packets' originators, and install a reject route for this destination into the routing table.</li></ul>



- **iso-net**—Reach the next-hop routing device by specifying an ISO NSAP.
- **next-table *routing-table-name***—Name of the next routing table to the destination.
- **receive**—Install a receive route for this destination into the routing table.
- **reject**—Do not forward packets addressed to this destination. Instead, drop the packets, send ICMP unreachable messages to the packets' originators, and install a reject route for this destination into the routing table.

**static-options**—(Optional under **route**) Additional information about static routes, which is included with the route when it is installed in the routing table.

You can specify one or more of the following in **static-options**. Each of the options is explained separately.

- **(active | passive);**
- **(install | no-install);**
- **(metric | metric2 | metric3 | metric4) *value* <type type>;**
- **(preference | preference2 | color | color2) *preference* <type type>;**
- **(resolve | no-resolve);**
- **(no-retain | retain);**

The remaining statements are explained separately.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Static Routing on page 2320</a></li> </ul>



## subscriber-leave-timer

---

<b>Syntax</b>	<code>subscriber-leave-timer seconds;</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">interface interface-name</a> ], [edit logical-systems <i>logical-system-name</i> routing-options multicast <a href="#">interface interface-name</a> ], [edit routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">interface interface-name</a> ], [edit routing-options multicast <a href="#">interface interface-name</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.2. Statement introduced in Junos OS Release 9.2 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	Length of time before the multicast VLAN updates QoS data (for example, available bandwidth) for subscriber interfaces after it receives an IGMP leave message.
<b>Options</b>	<b>seconds</b> —Length of time before the multicast VLAN updates QoS data (for example, available bandwidth) for subscriber interfaces after it receives an IGMP leave message. Specifying a value of 0 results in an immediate update. This is the same as if the statement were not configured. <b>Range:</b> 0 through 30 <b>Default:</b> 0 seconds
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Example: Configuring Multicast with Subscriber VLANs</li></ul>



## tag (Routing Options)

<b>Syntax</b>	<code>tag <i>string</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	Associate an OSPF tag with a static, aggregate, or generated route.
<b>Default</b>	No OSPF tag strings are associated with static routes.
<b>Options</b>	<i>string</i> —OSPF tag string.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Examples: Configuring Static Routes</li> <li>• Example: Summarizing Routes Through Route Aggregation</li> <li>• Example: Conditionally Generating Static Routes</li> <li>• <a href="#">aggregate on page 2350</a></li> <li>• <a href="#">generate on page 2380</a></li> <li>• static</li> </ul>



## threshold (Multicast Forwarding Cache)

---

Syntax	<pre>threshold {     log-warning <i>value</i>;     suppress <i>value</i> &lt;reuse <i>value</i>&gt;; }</pre>
Hierarchy Level	<pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options multicast forwarding-cache], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options multicast forwarding-cache family (inet   inet6)], [edit logical-systems <i>logical-system-name</i> routing-options multicast forwarding-cache], [edit logical-systems <i>logical-system-name</i> routing-options multicast forwarding-cache   family (inet   inet6)], [edit routing-instances <i>routing-instance-name</i> routing-options multicast forwarding-cache], [edit routing-instances <i>routing-instance-name</i> routing-options multicast forwarding-cache   (inet   inet6)], [edit routing-options multicast forwarding-cache], [edit routing-options multicast forwarding-cache family (inet   inet6)]</pre>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
Description	<p>Configure the global suppression, reuse, and warning log message thresholds for multicast forwarding cache limits. You can configure the thresholds globally for the multicast forwarding cache or individually for the IPv4 and IPv6 multicast forwarding caches. Configuring the <b>threshold</b> statement globally for the multicast forwarding cache or including the <b>family</b> statement to configure the thresholds for the IPv4 and IPv6 multicast forwarding caches are mutually exclusive.</p> <p>To confirm the configured threshold values, use the <b>show multicast forwarding-cache statistics</b> command.</p>
Options	<p><b>reuse <i>value</i></b>—(Optional) Value at which to begin creating new multicast forwarding cache entries. If configured, this number should be less than the <b>suppress</b> value.</p> <p><b>Range:</b> 1 through 200,000</p> <p><b>suppress <i>value</i></b>—Value at which to begin suppressing new multicast forwarding cache entries. This value is mandatory. This number should be greater than the <b>reuse</b> value.</p> <p><b>Range:</b> 1 through 200,000</p> <p>The remaining statement is explained separately.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"><li>Examples: Configuring the Multicast Forwarding Cache</li></ul>



## timeout (Flow Maps)

<b>Syntax</b>	<code>timeout (never non-discard-entry-only   <i>minutes</i>);</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i>],</p> <p>[edit routing-options multicast <b>flow-map</b> <i>flow-map-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.2.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	Configure the timeout value for multicast forwarding cache entries associated with the flow map.
<b>Options</b>	<p><b><i>minutes</i></b>—Length of time that the forwarding cache entry remains active.</p> <p><b>Range:</b> 1 through 720</p> <p><b>never non-discard-entry-only</b>—Specify that the forwarding cache entry always remain active. If you omit the <b>non-discard-entry-only</b> option, all multicast forwarding entries, including those in forwarding and pruned states, are kept forever. If you include the <b>non-discard-entry-only</b> option, entries with forwarding states are kept forever, and entries with pruned states time out.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>



## timeout (Multicast)

---

<b>Syntax</b>	timeout <i>minutes</i> <family (inet   inet6)>;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast forwarding-cache], [edit logical-systems <i>logical-system-name</i> routing-options multicast forwarding-cache], [edit routing-instances <i>routing-instance-name</i> routing-options multicast forwarding-cache], [edit routing-options multicast forwarding-cache]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.2. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	Configure the timeout value for multicast forwarding cache entries.
<b>Options</b>	<b>minutes</b> —Length of time that the forwarding cache limit remains active. <b>Range:</b> 1 through 720  <b>family (inet   inet6)</b> —(Optional) Apply the configured timeout to either IPv4 or IPv6 multicast forwarding cache entries. Configuring the <b>timeout</b> statement globally for the multicast forwarding cache or including the <b>family</b> statement to configure the timeout value for the IPv4 and IPv6 multicast forwarding caches are mutually exclusive.  <b>Default:</b> By default, the configured timeout applies to both IPv4 and IPv6 multicast forwarding cache entries.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Configuring the Multicast Forwarding Cache</li></ul>



## traceoptions (Routing Options)

<b>Syntax</b>	<pre> traceoptions {     file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i> &lt;disable&gt;; } </pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit routing-options],</p> <p>[edit routing-options flow],</p> <p>[edit routing-options multicast]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p><b>nsr-synchronization</b> flag for BGP, IS-IS, LDP, and OSPF added in Junos OS Release 8.4.</p> <p><b>nsr-synchronization</b> and <b>nsr-packet</b> flags for BFD sessions added in Junos OS Release 8.5.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>nsr-synchronization</b> flag for RIP and RIPng added in Junos OS Release 9.0.</p> <p><b>nsr-synchronization</b> flag for Layer 2 VPNs and VPLS added in Junos OS Release 9.1.</p> <p><b>nsr-synchronization</b> flag for PIM added in Junos OS Release 9.3.</p> <p><b>nsr-synchronization</b> flag for MPLS added in Junos OS Release 10.1.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p><b>nsr-synchronization</b> flag for MSDP added in Junos OS Release 12.1.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	<p>Define tracing operations that track all routing protocol functionality in the routing device.</p> <p>To specify more than one tracing operation, include multiple <b>flag</b> statements.</p>
<b>Default</b>	If you do not include this statement, no global tracing operations are performed.
<b>Options</b>	<p><b>Values:</b></p> <p><b>disable</b>—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as <b>all</b>.</p> <p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory <b>/var/log</b>. We recommend that you place global routing protocol tracing output in the file <b>routing-log</b>.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file named <b>trace-file</b> reaches its maximum size, it is renamed <b>trace-file.0</b>, then <b>trace-file.1</b>, and</p>



so on, until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. Note that if you specify a maximum number of files, you also must specify a maximum file size with the **size** option.

**Range:** 2 through 1000 files

**Default:** 10 files

**flag flag**—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements. These are the global routing protocol tracing options:

- **all**—All tracing operations
- **condition-manager**—Condition-manager events
- **config-internal**—Configuration internals
- **general**—All normal operations and routing table changes (a combination of the **normal** and **route** trace operations)
- **graceful-restart**—Graceful restart operations
- **normal**—All normal operations
- **nsr-packet**—Detailed trace information for BFD nonstop active routing only
- **nsr-synchronization**—Tracing operations for nonstop active routing
- **nsr-synchronization-detail**—(MPLS only) Tracing operations for nonstop active routing in detail
- **parse**—Configuration parsing
- **policy**—Routing policy operations and actions
- **regex-parse**—Regular-expression parsing
- **route**—Routing table changes
- **state**—State transitions
- **task**—Interface transactions and processing
- **timer**—Timer usage

**no-world-readable**—(Optional) Prevent any user from reading the log file.

**size size**—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches this size, it is renamed **trace-file.0**. When the **trace-file** again reaches its maximum size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. Note that if you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

**Syntax:** **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

**Range:** 10 KB through the maximum file size supported on your system

**Default:** 128 KB



**world-readable**—(Optional) Allow any user to read the log file.

<b>Required Privilege</b>	routing and trace—To view this statement in the configuration.
<b>Level</b>	routing-control and trace-control—To add this statement to the configuration.

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Tracing Global Routing Protocol Operations</li><li>• Tracing Nonstop Active Routing Synchronization Events</li></ul>
------------------------------	---



## upstream-interface

<b>Syntax</b>	<code>upstream-interface [ <i>interface-names</i> ];</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">pim-to-igmp-proxy</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast pim-to-mld-proxy],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <a href="#">pim-to-igmp-proxy</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast pim-to-mld-proxy],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">pim-to-igmp-proxy</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast pim-to-mld-proxy],</p> <p>[edit routing-options multicast <a href="#">pim-to-igmp-proxy</a>],</p> <p>[edit routing-options multicast pim-to-mld-proxy]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	<p>Configure at least one, but not more than two, upstream interfaces on the rendezvous point (RP) routing device that resides between a customer edge-facing Protocol Independent Multicast (PIM) domain and a core-facing PIM domain. The RP routing device translates PIM join or prune messages into corresponding IGMP report or leave messages (if you include the <a href="#">pim-to-igmp-proxy</a> statement), or into corresponding MLD report or leave messages (if you include the <a href="#">pim-to-mld-proxy</a> statement). The routing device then proxies the IGMP or MLD report or leave messages to one or both upstream interfaces to forward IPv4 multicast traffic (for IGMP) or IPv6 multicast traffic (for MLD) across the PIM domains.</p>
<b>Options</b>	<p><b><i>interface-names</i></b>—Names of one or two upstream interfaces to which the RP routing device proxies IGMP or MLD report or leave messages for transmission of multicast traffic across PIM domains. You can specify a maximum of two upstream interfaces on the RP routing device. To configure a set of two upstream interfaces, specify the full interface names, including all physical and logical address components, within square brackets ( [ ] ).</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Configuring PIM-to-IGMP Message Translation</li> <li>Configuring PIM-to-MLD Message Translation</li> </ul>



# Administration

- [Routine Monitoring on page 2447](#)
- [Operational Commands on page 2449](#)

## Routine Monitoring

- [Monitoring Routing Information on page 2447](#)
- [Verifying That Virtual Router Routing Instances Are Working on page 2448](#)

### Monitoring Routing Information

- Purpose** Use the monitoring functionality to view the `inet.0` routing table on the routing device.
- Action** To view the routing table, enter the following commands in the CLI interface:
- `show route terse`
  - `show route detail`
- Meaning** [Table 179 on page 2447](#) describes the different filters, their functions, and the associated actions.
- [Table 180 on page 2448](#) summarizes key output fields in the routing information display.

Table 179: Filtering Route Messages

Field	Function	Your Action
Destination Address	Specifies the destination address of the route.	Enter the destination address.
Next hop address	Specifies the network layer address of the directly reachable neighboring system (if applicable) and the interface used to reach it.	Enter the next hop address.
Best route	Specifies only the best route available.	Select the view details of the best route.
Inactive routes	Specifies the inactive routes.	Select the view details of inactive routes.
Exact route	Specifies the exact route.	Select the view details of the exact route.



Table 179: Filtering Route Messages (*continued*)

Field	Function	Your Action
Hidden routes	Specifies the hidden routes.	Select the view details of hidden routes.
Search	Applies the specified filter and displays the matching messages.	To apply the filter and display messages, click <b>Search</b> .

Table 180: Summary of Key Routing Information Output Fields

Field	Values	Additional Information
Static Route Addresses	The list of static route addresses.	
Protocol	Protocol from which the route was learned: <b>Static</b> , <b>Direct</b> , <b>Local</b> .	
Preference	The preference is the individual preference value for the route.	The route preference is used as one of the route selection criteria.
Next-Hop	Network layer address of the directly reachable neighboring system (if applicable) and the interface used to reach it.	<p>If a next hop is listed as <b>Discard</b>, all traffic with that destination address is discarded rather than routed. This value generally means that the route is a static route for which the <b>discard</b> attribute has been set.</p> <p>If a next hop is listed as <b>Reject</b>, all traffic with that destination address is rejected. This value generally means that the address is unreachable. For example, if the address is a configured interface address and the interface is unavailable, traffic bound for that address is rejected.</p> <p>If a next hop is listed as <b>Local</b>, the destination is an address on the host (either the loopback address or Ethernet management port 0 address, for example).</p>
Age	How long the route has been active.	
State	Flags for this route.	There are many possible flags.

**Related Documentation** • [Configuring Static Routing on page 2320](#)

## Verifying That Virtual Router Routing Instances Are Working

**Purpose** After creating a virtual router routing instance, verify that it has been set up properly.

**Action** 1. Use the **show route instance** command to list all the routing instances and their properties:

```
user@switch> show route instance
```



Instance	Type	Active/holddown/hidden
Primary RIB		
master	forwarding	
inet.0		4/0/1
__juniper_private1__	forwarding	
__juniper_private1__.inet.0		1/0/3
__juniper_private2__	forwarding	
__juniper_private2__.inet.0		0/0/1
__juniper_private3__	forwarding	
__juniper_private3__.inet.0		1/0/2
__juniper_private4__	forwarding	
__juniper_private4__.inet.0		4/0/2
__master.anon__	forwarding	
r1	virtual-router	
r2	virtual-router	

2. Use the **show route forwarding-table** command to view the forwarding table information for each routing instance:

```

user@switch> show route forwarding-table
Routing table: r1---qfabric.inet
Internet:
Destination      Type RtRef Next hop      Type Index NhRef Netif
default          perm  0      0              rjct 1628  1
0.0.0.0/32       perm  0      0              dscd 1626  1
224.0.0.0/4      perm  0      0              mdsc 1627  1
224.0.0.1/32     perm  0 224.0.0.1     mcst 1623  1
255.255.255.255/32 perm  0      0              bcst 1624  1

```

**Meaning** The output displays the routing table information and confirms that the virtual router routing instances have been created and the links are up.

**Related Documentation**

- [Configuring Virtual Router Routing Instances on page 2323](#)

## Operational Commands



## clear ipv6 neighbors

---

<b>Syntax</b>	clear ipv6 neighbors <all   host <i>hostname</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.3 for EX Series switches. Command introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Clear IPv6 neighbor cache information.
<b>Options</b>	<b>none</b> —Clear all IPv6 neighbor cache information.  <b>all</b> —(Optional) Clear all IPv6 neighbor cache information.  <b>host <i>hostname</i></b> —(Optional) Clear the information for the specified IPv6 neighbors.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show ipv6 neighbors on page 2459</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear ipv6 neighbors on page 2450</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

**clear ipv6 neighbors**      user@host> clear ipv6 neighbors



## show as-path

<b>Syntax</b>	show as-path <brief   detail> <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	show as-path <brief   detail>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	<p>Display the distribution of autonomous system (AS) paths that the local routing device is using (usually through the routing table). Use this command to debug problems for AS paths and to understand how AS paths have been manipulated through a policy (through the <b>as-path-prepend</b> action) or through aggregation.</p> <p>AS paths are stored in a hash table. A hash table is one method for fast lookup. Each entry in the table is called a bucket. Junos OS computes a hash value that indicates in which bucket the AS path is stored. The AS paths are dispersed among the hash buckets so that a manageable number of AS paths is stored in each bucket. Only unique AS paths are stored. Duplicate AS paths increase a reference count, but do not increase the number of AS paths stored in the hash table.</p>
<b>Options</b>	<p><b>none</b>—Display basic information about AS paths that the local routing device is using (same as brief).</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><a href="#">show as-path summary on page 2457</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show as-path on page 2453</a> <a href="#">show as-path detail on page 2453</a>
<b>Output Fields</b>	<a href="#">Table 181 on page 2451</a> lists the output fields for the <b>show as-path</b> command. Output fields are listed in the approximate order in which they appear.

**Table 181: show as-path Output Fields**

Field Name	Field Description	Level of Output
Total AS paths	Total number of AS paths.	brief none
Bucket	Bucket number.	All levels



Table 181: show as-path Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Count</b>	Number of AS path entries in this bucket.	All levels
<b>AS path</b>	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• <b>I</b>—IGP.</li> <li>• <b>E</b>—EGP.</li> <li>• <b>?</b>—Incomplete; typically, the AS path was aggregated.</li> <li>• <b>Atomic</b>—Route is an aggregate of several route prefixes.</li> <li>• <b>Aggregator</b>—Routing device has summarized a range of prefixes.</li> </ul>	All levels
<b>domain</b>	Number of independent AS domains. The AS paths of an independent AS domain are not shared with the AS paths and AS path attributes of other domains, including the master routing instance domain.	<b>detail</b>
<b>neighbor as</b>	AS peer address.	<b>detail</b>
<b>length</b>	Length of the AS path.	<b>detail</b>
<b>segments</b>	Length of the AS segment descriptor.	<b>detail</b>
<b>references</b>	Path reference count.	<b>detail</b>



## Sample Output

### show as-path

```

user@host> show as-path
Total AS paths: 30382
Bucket 0    Count: 36
I
14203 2914 174 31752 I
14203 2914 701 21512 I
14203 2914 1239 26632 I
14203 2914 1239 29704 I
14203 2914 4323 10248 I
14203 2914 4766 23560 I
14203 2914 6395 32776 I
14203 2914 7911 11272 I
14203 2914 12180 18440 I
14203 2914 17408 17416 I
14203 2914 701 702 24586 I
14203 2914 1239 4657 9226 I
14203 2914 1239 7132 16394 I
14203 2914 1299 8308 34826 I
14203 2914 3320 5603 28682 I
14203 2914 3491 1680 33802 I
14203 2914 3549 7908 27658 I
14203 2914 3549 20804 30730 I
14203 2914 7018 2687 9226 I
14203 2914 174 9318 9318 23564 I
14203 2914 701 3786 3786 23564 I
14203 2914 701 4761 4795 9228 I
14203 2914 1239 7132 5673 18444 I
14203 2914 3491 20485 24588 24588 I
14203 2914 5511 2200 1945 2060 I
14203 2914 7911 14325 14325 14348 I
14203 2914 701 4637 9230 9230 9230 I
14203 2914 6395 14 14 14 14 I
14203 2914 9299 6163 6163 6163 6163 9232 I
14203 2914 3356 3356 3356 3356 3356 11955 21522 I
14203 2914 9837 9837 9219 I Aggregator: 9219 202.27.91.253
14203 2914 174 30209 30222 30222 30222 ?
14203 2914 1299 5377 I (Atomic) Aggregator: 5377 193.219.192.22
14203 2914 4323 36097 I (Atomic) Aggregator: 36097 216.69.252.254
14203 2914 209 2516 17676 23813 I (Atomic) Aggregator: 23813 219.127.233.66
Bucket 1    Count: 28
14203 2914 35847 I
14203 2914 174 19465 I
14203 2914 174 35849 I
14203 2914 2828 32777 I
14203 2914 4323 14345 I
14203 2914 4323 29705 I
14203 2914 6395 32777 I

```

...

### show as-path detail

```

user@host> show as-path detail
Total AS paths: 30410
Bucket 0    Count: 36
AS path: I
    domain 0, length 0, segments 0, references 54
AS path: 14203 2914 174 31752 I
    domain 1, neighbor as: 14203, length 4, segments 1, references 2

```



```
AS path: 14203 2914 701 21512 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 2
AS path: 14203 2914 1239 26632 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 2
AS path: 14203 2914 1239 29704 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 2
AS path: 14203 2914 4323 10248 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 2
AS path: 14203 2914 4766 23560 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 2
AS path: 14203 2914 6395 32776 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 3
AS path: 14203 2914 7911 11272 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 2
AS path: 14203 2914 12180 18440 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 3
AS path: 14203 2914 17408 17416 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 3
AS path: 14203 2914 701 702 24586 I
  domain 1, neighbor as: 14203, length 5, segments 1, references 3
AS path: 14203 2914 1239 4657 9226 I
  domain 1, neighbor as: 14203, length 5, segments 1, references 7
AS path: 14203 2914 1239 7132 16394 I
  domain 1, neighbor as: 14203, length 5, segments 1, references 2
AS path: 14203 2914 1299 8308 34826 I
  domain 1, neighbor as: 14203, length 5, segments 1, references 2
AS path: 14203 2914 3320 5603 28682 I
  domain 1, neighbor as: 14203, length 5, segments 1, references 2
AS path: 14203 2914 3491 1680 33802 I
  domain 1, neighbor as: 14203, length 5, segments 1, references 2
AS path: 14203 2914 3549 7908 27658 I
  domain 1, neighbor as: 14203, length 5, segments 1, references 2
AS path: 14203 2914 3549 20804 30730 I
  domain 1, neighbor as: 14203, length 5, segments 1, references 2
AS path: 14203 2914 7018 2687 9226 I
  domain 1, neighbor as: 14203, length 5, segments 1, references 3
AS path: 14203 2914 174 9318 9318 23564 I
  domain 1, neighbor as: 14203, length 6, segments 1, references 2
AS path: 14203 2914 701 3786 3786 23564 I
  domain 1, neighbor as: 14203, length 6, segments 1, references 2
AS path: 14203 2914 701 4761 4795 9228 I
  domain 1, neighbor as: 14203, length 6, segments 1, references 14
AS path: 14203 2914 1239 7132 5673 18444 I
  domain 1, neighbor as: 14203, length 6, segments 1, references 2
AS path: 14203 2914 3491 20485 24588 24588 I
  domain 1, neighbor as: 14203, length 6, segments 1, references 4
AS path: 14203 2914 5511 2200 1945 2060 I
  domain 1, neighbor as: 14203, length 6, segments 1, references 2
AS path: 14203 2914 7911 14325 14325 14348 I
  domain 1, neighbor as: 14203, length 6, segments 1, references 2
AS path: 14203 2914 701 4637 9230 9230 9230 I
  domain 1, neighbor as: 14203, length 7, segments 1, references 3
AS path: 14203 2914 6395 14 14 14 14 I
  domain 1, neighbor as: 14203, length 7, segments 1, references 10
...
```



## show as-path domain

<b>Syntax</b>	show as-path domain <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	show as-path domain
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display autonomous system (AS) path domain information.
<b>Options</b>	<b>none</b> —(Optional) Display AS path domain information for all routing instances.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show as-path domain on page 2456</a>
<b>Output Fields</b>	<a href="#">Table 182 on page 2455</a> lists the output fields for the <b>show as-path domain</b> command. Output fields are listed in the approximate order in which they appear

**Table 182: show as-path domain Output Fields**

Field Name	Field Description
<b>Domain</b>	Number of independent AS domains. The AS paths of an independent AS domain are not shared with the AS paths and AS path attributes of other domains, including the master routing instance domain.
<b>Primary</b>	Primary AS number.
<b>References</b>	Path reference count.
<b>Number Paths</b>	Number of known AS paths.
<b>Flags</b>	Information about the AS path: <ul style="list-style-type: none"> <li>• <b>ASLoop</b>—Path contains an AS loop.</li> <li>• <b>Atomic</b>—Path includes the ATOMIC_AGGREGATE path attribute.</li> <li>• <b>Local</b>—Path was created by local aggregation.</li> <li>• <b>Master</b>—Path was created by the master routing instance.</li> </ul>
<b>Local AS</b>	AS number of the local routing device.
<b>Loops</b>	How many times this AS number can appear in an AS path.



## Sample Output

```
show as-path domain    user@host> show as-path domain
Domain: 1               Primary: 10458
References:             3 Paths:      30383
Flags: Master
Local AS: 10458  Loops: 1
```



## show as-path summary

<b>Syntax</b>	show as-path summary <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	show as-path summary
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display autonomous system (AS) path summary information.  AS paths are stored in a hash table. A hash table is one method for fast lookup. Each entry in the table is called a bucket. Junos OS computes a hash value that indicates in which bucket the AS path is stored. The AS paths are dispersed among the hash buckets so that a manageable number of AS paths is stored in each bucket. Only unique AS paths are stored. Duplicate AS paths increase a reference count, but do not increase the number of AS paths stored in the hash table.
<b>Options</b>	<b>none</b> —(Optional) Display AS path summary information for all routing instances.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><a href="#">show as-path on page 2451</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show as-path summary on page 2458</a>
<b>Output Fields</b>	<a href="#">Table 183 on page 2457</a> lists the output fields for the <b>show as-path summary</b> command. Output fields are listed in the approximate order in which they appear.

**Table 183: show as-path summary Output Fields**

Field Name	Field Description
AS Paths	Number of AS paths.
Buckets	Number of hash buckets in use.
Max	Maximum number of AS path entries per bucket.
Min	Minimum number of AS path entries per bucket.
Avg	Average number of AS path entries per bucket.
Std deviation	Standard deviation of AS path entries per bucket.



## Sample Output

`show as-path  
summary`

```
user@host> show as-path summary
AS Paths Buckets Max Min Avg Std deviation
30425 1024 95 12 29 6.481419
```



## show ipv6 neighbors

<b>Syntax</b>	show ipv6 neighbors
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.3 for EX Series switches. Command introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	Display information about the IPv6 neighbor cache.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">clear ipv6 neighbors on page 2450</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show ipv6 neighbors on page 2460</a>
<b>Output Fields</b>	<a href="#">Table 184 on page 2459</a> describes the output fields for the <b>show ipv6 neighbors</b> command. Output fields are listed in the approximate order in which they appear.

**Table 184: show ipv6 neighbors Output Fields**

Field Name	Field Description
IPv6 Address	Name of the IPv6 interface.
Linklayer Address	Link-layer address.
State	State of the link: <b>up</b> , <b>down</b> , <b>incomplete</b> , <b>reachable</b> , <b>stale</b> , or <b>unreachable</b> .
Exp	Number of seconds until the entry expires.
Rtr	Whether the neighbor is a routing device: <b>yes</b> or <b>no</b> .
Secure	Whether this entry was created using the Secure Neighbor Discovery (SEND) protocol: <b>yes</b> or <b>no</b> .
Interface	Name of the interface.



## Sample Output

**show ipv6 neighbors**

user@host> **show ipv6 neighbors**

IPv6 Address	Linklayer Address	State	Exp	Rtr	Secure
Interface					
2001:db8:0:1:2a0:a514:0:24c	00:05:85:8f:c8:bd	stale	546	yes	no
fe-1/2/0.1					
fe80::2a0:a514:0:24c	00:05:85:8f:c8:bd	stale	258	yes	no
fe-1/2/0.1					
fe80::2a0:a514:0:64c	00:05:85:8f:c8:bd	stale	111	yes	no
fe-1/2/1.5					
fe80::2a0:a514:0:a4c	00:05:85:8f:c8:bd	stale	327	yes	no
fe-1/2/2.9					



## show ipv6 router-advertisement

<b>Syntax</b>	<pre>show ipv6 router-advertisement &lt;conflicts&gt; &lt;interface <i>interface</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;prefix <i>prefix/prefix length</i>&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 12.2 for the QFX Series.</p>
<b>Description</b>	Display information about IPv6 router advertisements, including statistics about messages sent and received on interfaces, and information received from advertisements from other routers.
<b>Options</b>	<p><b>none</b>—Display all IPv6 router advertisement information for all interfaces.</p> <p><b>conflicts</b>—(Optional) Display only the IPv6 router advertisement information that is conflicting.</p> <p><b>interface <i>interface</i></b>—(Optional) Display IPv6 router advertisement information for the specified interface.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>prefix <i>prefix/prefix length</i></b>—(Optional) Display IPv6 router advertisement information for the specified prefix.</p>
<b>Additional Information</b>	The display identifies conflicting information by enclosing the value the router is advertising in brackets.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>clear ipv6 router-advertisement</li> </ul>
<b>List of Sample Output</b>	<p><a href="#">show ipv6 router-advertisement on page 2463</a></p> <p><a href="#">show ipv6 router-advertisement conflicts on page 2463</a></p> <p><a href="#">show ipv6 router-advertisement prefix on page 2463</a></p>
<b>Output Fields</b>	Table 185 on page 2461 describes the output fields for the <b>show ipv6 router-advertisement</b> command. Output fields are listed in the approximate order in which they appear.

Table 185: show ipv6 router-advertisement Output Fields

Field Name	Field Description
Interface	Name of the interface.
Advertisements sent	Number of router advertisements sent and the elapsed time since they were sent.



Table 185: show ipv6 router-advertisement Output Fields (*continued*)

Field Name	Field Description
<b>Solicits received</b>	Number of solicitation messages received.
<b>Advertisements received</b>	Number of router advertisements received.
<b>Advertisements from</b>	Names of interfaces from which router advertisements have been received and the elapsed time since the last one was received.
<b>Managed</b>	Managed address configuration flag: 0 (stateless) or 1 (stateful).
<b>Other configuration</b>	Other stateful configuration flag: 0 (stateless) or 1 (stateful).
<b>Reachable time</b>	Time that a node identifies a neighbor as reachable after receiving a reachability confirmation, in milliseconds.
<b>Default lifetime</b>	Default lifetime, in seconds: from 0 seconds to 18.2 hours. A setting of 0 indicates that the router is not a default router.
<b>Retransmit timer</b>	Time between retransmitted Neighbor Solicitation messages, in milliseconds.
<b>Current hop limit</b>	Configured current hop limit.
<b>Prefix</b>	Name and length of the prefix.
<b>Valid lifetime</b>	How long the prefix remains valid for onlink determination.
<b>Preferred lifetime</b>	How long the prefix generated by stateless autoconfiguration remains preferred.
<b>On link</b>	Onlink flag: 0 (not onlink) or 1 (onlink).
<b>Autonomous</b>	Autonomous address configuration flag: 0 (not autonomous) or 1 (autonomous).



## Sample Output

**show ipv6  
router-advertisement**

```
user@host> show ipv6 router-advertisement
Interface: fe-0/1/1.0
  Advertisements sent: 0
  Solicits received: 0
  Advertisements received: 0
Interface: fxp0.0
  Advertisements sent: 0
  Solicits received: 0
  Advertisements received: 1
  Advertisement from fe80::2d0:b7ff:fe1e:7b0e, heard 00:00:13 ago
  Managed: 0
  Other configuration: 0 [1]
    Reachable time: 0 ms
    Default lifetime: 1800 sec
    Retransmit timer: 0 ms
    Current hop limit: 64
```

**show ipv6  
router-advertisement  
conflicts**

```
user@host> show ipv6 router-advertisement conflicts
Interface: fxp0.0
  Advertisement from fe80::2d0:b7ff:fe1e:7b0e, heard 00:01:08 ago
  Other configuration: 0 [1]
```

**show ipv6  
router-advertisement  
prefix**

```
user@host> show ipv6 router-advertisement prefix 8040::/16
Interface: fe-0/1/3.0
  Advertisements sent: 3, last sent 00:04:11 ago
  Solicits received: 0
  Advertisements received: 3
  Advertisement from fe80::290:69ff:fe9a:5403, heard 00:00:05 ago
  Managed: 0
  Other configuration: 0
  Reachable time: 0 ms
  Default lifetime: 180 sec [1800 sec]
  Retransmit timer: 0 ms
  Current hop limit: 64
  Prefix: 8040:1::/64
    Valid lifetime: 2592000 sec
    Preferred lifetime: 604800 sec
    On link: 1
    Autonomous: 1
```



## show route

---

<b>Syntax</b>	<code>show route</code> <code>&lt;all&gt;</code> <code>&lt;destination-prefix&gt;</code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code> <code>&lt;private&gt;</code>
<b>Syntax (EX Series Switches)</b>	<code>show route</code> <code>&lt;all&gt;</code> <code>&lt;destination-prefix&gt;</code> <code>&lt;private&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Option <b>private</b> introduced in Junos OS Release 9.5. Option <b>private</b> introduced in Junos OS Release 9.5 for EX Series switches.
<b>Description</b>	Display the active entries in the routing tables.
<b>Options</b>	<b>none</b> —Display brief information about all active entries in the routing tables.  <b>all</b> —(Optional) Display information about all routing tables, including private, or internal, routing tables.  <b>destination-prefix</b> —(Optional) Display active entries for the specified address or range of addresses.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.  <b>private</b> —(Optional) Display information only about all private, or internal, routing tables.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring RIP on page 3551</a></li><li>• <a href="#">Example: Configuring RIPng</a></li><li>• <a href="#">Example: Configuring IS-IS</a></li><li>• <a href="#">Examples: Configuring Internal BGP Peering on page 2666</a></li><li>• <a href="#">Examples: Configuring External BGP Peering on page 2643</a></li><li>• <a href="#">Examples: Configuring OSPF Routing Policy on page 3405</a></li></ul>
<b>List of Sample Output</b>	<a href="#">show route on page 2468</a> <a href="#">show route destination-prefix on page 2468</a> <a href="#">show route extensive on page 2468</a>



**Output Fields** Table 186 on page 2465 describes the output fields for the **show route** command. Output fields are listed in the approximate order in which they appear.

**Table 186: show route Output Fields**

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table (for example, inet.0).
<i>number destinations</i>	Number of destinations for which there are routes in the routing table.
<i>number routes</i>	<p>Number of routes in the routing table and total number of routes in the following states:</p> <ul style="list-style-type: none"> <li>• <b>active</b> (routes that are active).</li> <li>• <b>holddown</b> (routes that are in the pending state before being declared inactive). A holddown route was once the active route and is no longer the active route. The route is in the holddown state because a protocol still has interest in the route, meaning that the interest bit is set. A protocol might have its interest bit set on the previously active route because the protocol is still advertising the route. The route will be deleted after all protocols withdraw their advertisement of the route and remove their interest bit. A persistent holddown state often means that the interested protocol is not releasing its interest bit properly.</li> </ul> <p>However, if you have configured advertisement of multiple routes (with the <b>add-path</b> or <b>advertise-inactive</b> statement), the holddown bit is most likely set because BGP is advertising the route as an active route. In this case, you can ignore the holddown state because nothing is wrong.</p> <ul style="list-style-type: none"> <li>• <b>hidden</b> (routes that are not used because of a routing policy).</li> </ul>
<i>destination-prefix</i>	<p>Route destination (for example:10.0.0.1/24). Sometimes the route information is presented in another format, such as:</p> <ul style="list-style-type: none"> <li>• <b>MPLS-label</b> (for example, 80001).</li> <li>• <b>interface-name</b> (for example, ge-1/0/2).</li> <li>• <b>neighbor-address:control-word-status:encapsulation type:vc-id:source</b> (Layer 2 circuit only. For example, 10.1.1.195:NoCtrlWord:1:1:Local/96): <ul style="list-style-type: none"> <li>• <b>neighbor-address</b>—Address of the neighbor.</li> <li>• <b>control-word-status</b>—Whether the use of the control word has been negotiated for this virtual circuit: <b>NoCtrlWord</b> or <b>CtrlWord</b>.</li> <li>• <b>encapsulation type</b>—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport.</li> <li>• <b>vc-id</b>—Virtual circuit identifier.</li> <li>• <b>source</b>—Source of the advertisement: <b>Local</b> or <b>Remote</b>.</li> </ul> </li> </ul>
<b>[ protocol, preference ]</b>	<p>Protocol from which the route was learned and the preference value for the route.</p> <ul style="list-style-type: none"> <li>• <b>+</b>—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>-</b>—A hyphen indicates the last active route.</li> <li>• <b>*</b>—An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul> <p>In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value.</p>



Table 186: show route Output Fields (*continued*)

Field Name	Field Description
<i>weeks:days</i> <i>hours:minutes:seconds</i>	How long the route been known (for example, <b>2w4d 13:11:14</b> , or 2 weeks, 4 days, 13 hours, 11 minutes, and 14 seconds).
<b>metric</b>	Cost value of the indicated route. For routes within an AS, the cost is determined by the IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.
<b>localpref</b>	Local preference value included in the route.
<b>from</b>	Interface from which the route was received.
<b>AS path</b>	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• <b>I</b>—IGP.</li> <li>• <b>E</b>—EGP.</li> <li>• <b>?</b>—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li>• <b>[ ]</b>—Brackets enclose the local AS number associated with the AS path if more than one AS number is configured on the routing device, or if AS path prepending is configured.</li> <li>• <b>{ }</b>—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li>• <b>( )</b>—Parentheses enclose a confederation.</li> <li>• <b>( [ ] )</b>—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>
<b>validation-state</b>	<p>(BGP-learned routes) Validation status of the route:</p> <ul style="list-style-type: none"> <li>• <b>Invalid</b>—Indicates that the prefix is found, but either the corresponding AS received from the EBGP peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database.</li> <li>• <b>Unknown</b>—Indicates that the prefix is not among the prefixes or prefix ranges in the database.</li> <li>• <b>Valid</b>—Indicates that the prefix and autonomous system pair are found in the database.</li> </ul>
<b>to</b>	<p>Next hop to the destination. An angle bracket (&gt;) indicates that the route is the selected route.</p> <p>If the destination is <b>Discard</b>, traffic is dropped.</p>



Table 186: show route Output Fields (*continued*)

Field Name	Field Description
<b>via</b>	<p>Interface used to reach the next hop. If there is more than one interface available to the next hop, the interface that is actually used is followed by the word <b>Selected</b>. This field can also contain the following information:</p> <ul style="list-style-type: none"><li>• <b>Weight</b>—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.</li><li>• <b>Balance</b>—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.</li><li>• <b>lsp-path-name</b>—Name of the LSP used to reach the next hop.</li><li>• <b>label-action</b>—MPLS label and operation occurring at the next hop. The operation can be <b>pop</b> (where a label is removed from the top of the stack), <b>push</b> (where another label is added to the label stack), or <b>swap</b> (where a label is replaced by another label).</li></ul>



## Sample Output

### show route

```
user@host> show route
inet.0: 11 destinations, 12 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1:65500:1:10.0.0.20/240
    *[MVPN/70] 19:53:41, metric2 1
    Indirect
1:65500:1:10.0.0.40/240
    *[BGP/170] 19:53:29, localpref 100, from 10.0.0.30
    AS path: I
    > to 10.0.24.4 via lt-0/3/0.24, label-switched-path toD
    [BGP/170] 19:53:26, localpref 100, from 10.0.0.33
    AS path: I
    > to 10.0.24.4 via lt-0/3/0.24, label-switched-path toD
1:65500:1:10.0.0.60/240
    *[BGP/170] 19:53:29, localpref 100, from 10.0.0.30
    AS path: I
    > to 10.0.28.8 via lt-0/3/0.28, label-switched-path toF
    [BGP/170] 19:53:25, localpref 100, from 10.0.0.33
    AS path: I
    > to 10.0.28.8 via lt-0/3/0.28, label-switched-path toF
```

### show route destination-prefix

```
user@host> show route 172.16.0.0/12

inet.0: 10 destinations, 10 routes (9 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

172.16.0.0/12    *[Static/5] 2w4d 12:54:27
    > to 192.168.167.254 via fxp0.0
```

### show route extensive

```
user@host> show route extensive
v1.mvpn.0: 5 destinations, 8 routes (5 active, 1 holddown, 0 hidden)
1:65500:1:10.0.0.40/240 (1 entry, 1 announced)
    *BGP    Preference: 170/-101
    PMSI: Flags 0x0: Label[0:0:0]: PIM-SM: Sender 10.0.0.40 Group 225.1.1.1

    Next hop type: Indirect
    Address: 0x92455b8
    Next-hop reference count: 2
    Source: 10.0.0.30
    Protocol next hop: 10.0.0.40
    Indirect next hop: 2 no-forward
    State: <Active Int Ext>
        Local AS: 65500 Peer AS: 65500
    Age: 3 Metric2: 1
    Task: BGP_65500.10.0.0.30+179
    Announcement bits (2): 0-PIM.v1 1-mvpn global task
    AS path: I (Originator) Cluster list: 10.0.0.30
    AS path: Originator ID: 10.0.0.40
    Communities: target:65520:100
    Import Accepted
    Localpref: 100
    Router ID: 10.0.0.30
    Primary Routing Table bgp.mvpn.0
    Indirect next hops: 1
        Protocol next hop: 10.0.0.40 Metric: 1
```



```
Indirect next hop: 2 no-forward
Indirect path forwarding next hops: 1
  Next hop type: Router
  Next hop: 10.0.24.4 via lt-0/3/0.24 weight 0x1
10.0.0.40/32 Originating RIB: inet.3
  Metric: 1                               Node path count: 1
  Forwarding nexthops: 1
    Nexthop: 10.0.24.4 via lt-0/3/0.24
```



## show route active-path

---

<b>Syntax</b>	show route active-path <brief   detail   extensive   terse> <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	show route active-path <brief   detail   extensive   terse>
<b>Release Information</b>	Command introduced in Junos OS Release 8.0. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display all active routes for destinations. An active route is a route that is selected as the best path. Inactive routes are not displayed.
<b>Options</b>	<b>none</b> —Display all active routes.  <b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b> .  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route active-path on page 2471</a> <a href="#">show route active-path brief on page 2471</a> <a href="#">show route active-path detail on page 2471</a> <a href="#">show route active-path extensive on page 2472</a> <a href="#">show route active-path terse on page 2474</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.



## Sample Output

**show route active-path** user@host> **show route active-path**

```
inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.70.19/32    *[Direct/0] 21:33:52
                  > via lo0.0
10.255.71.50/32    *[IS-IS/15] 00:18:13, metric 10
                  > to 100.1.2.1 via so-2/1/3.0
100.1.2.0/24      *[Direct/0] 00:18:36
                  > via so-2/1/3.0
100.1.2.2/32      *[Local/0] 00:18:41
                  Local via so-2/1/3.0
192.168.64.0/21   *[Direct/0] 21:33:52
                  > via fxp0.0
192.168.70.19/32  *[Local/0] 21:33:52
                  Local via fxp0.0
```

**show route active-path brief** The output for the **show route active-path brief** command is identical to that for the **show route active-path** command. For sample output, see [show route active-path on page 2471](#).

**show route active-path detail** user@host> **show route active-path detail**

```
inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)

10.255.70.19/32 (1 entry, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via lo0.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:37:10
    Task: IF
    Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

10.255.71.50/32 (1 entry, 1 announced)
  *IS-IS Preference: 15
    Level: 1
    Next hop type: Router, Next hop index: 397
    Next-hop reference count: 4
    Next hop: 100.1.2.1 via so-2/1/3.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:31 Metric: 10
    Task: IS-IS
    Announcement bits (4): 0-KRT 2-IS-IS 5-Resolve tree 2 6-Resolve
tree 3
    AS path: I

100.1.2.0/24 (1 entry, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
```



```

Next hop: via so-2/1/3.0, selected
State: <Active Int>
Local AS: 200
Age: 21:54
Task: IF
Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3

AS path: I

100.1.2.2/32 (1 entry, 1 announced)
  *Local Preference: 0
    Next hop type: Local
    Next-hop reference count: 11
    Interface: so-2/1/3.0
    State: <Active NoReadvrt Int>
    Local AS: 200
    Age: 21:59
    Task: IF
    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

192.168.64.0/21 (1 entry, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via fxp0.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:37:10
    Task: IF
    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

192.168.70.19/32 (1 entry, 1 announced)
  *Local Preference: 0
    Next hop type: Local
    Next-hop reference count: 11
    Interface: fxp0.0
    State: <Active NoReadvrt Int>
    Local AS: 200
    Age: 21:37:10
    Task: IF
    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

```

#### show route active-path extensive

```

user@host> show route active-path extensive

inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
10.255.70.19/32 (1 entry, 1 announced)
TSI:
IS-IS level 1, LSP fragment 0
IS-IS level 2, LSP fragment 0
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via lo0.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:39:47
    Task: IF
    Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3

```



```

AS path: I

10.255.71.50/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.255.71.50/32 -> {100.1.2.1}
IS-IS level 2, LSP fragment 0
  *IS-IS Preference: 15
    Level: 1
    Next hop type: Router, Next hop index: 397
    Next-hop reference count: 4
    Next hop: 100.1.2.1 via so-2/1/3.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 24:08 Metric: 10
    Task: IS-IS
    Announcement bits (4): 0-KRT 2-IS-IS 5-Resolve tree 2 6-Resolve
tree 3
AS path: I

100.1.2.0/24 (1 entry, 1 announced)
TSI:
IS-IS level 1, LSP fragment 0
IS-IS level 2, LSP fragment 0
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via so-2/1/3.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 24:31
    Task: IF
    Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3
AS path: I

100.1.2.2/32 (1 entry, 1 announced)
  *Local Preference: 0
    Next hop type: Local
    Next-hop reference count: 11
    Interface: so-2/1/3.0
    State: <Active NoReadvrt Int>
    Local AS: 200
    Age: 24:36
    Task: IF
    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
AS path: I

192.168.64.0/21 (1 entry, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via fxp0.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:39:47
    Task: IF
    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
AS path: I

192.168.70.19/32 (1 entry, 1 announced)

```



```
*Local Preference: 0
Next hop type: Local
Next-hop reference count: 11
Interface: fxp0.0
State: <Active NoReadvrt Int>
Local AS: 200
Age: 21:39:47
Task: IF
Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
AS path: I
```

**show route active-path terse** user@host> **show route active-path terse**

```
inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both
```

A	Destination	P	Prf	Metric 1	Metric 2	Next hop	AS path
*	10.255.70.19/32	D	0			>100.0	
*	10.255.71.50/32	I	15	10		>100.1.2.1	
*	100.1.2.0/24	D	0			>so-2/1/3.0	
*	100.1.2.2/32	L	0			Local	
*	192.168.64.0/21	D	0			>fxp0.0	
*	192.168.70.19/32	L	0			Local	



---

## show route all

---

<b>Syntax</b>	show route all <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	show route all
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display information about all routes in all routing tables, including private, or internal, tables.
<b>Options</b>	<b>none</b> —Display information about all routes in all routing tables, including private, or internal, tables.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route all on page 2476</a>
<b>Output Fields</b>	In Junos OS Release 9.5 and later, only the output fields for the <b>show route all</b> command display all routing tables, including private, or hidden, routing tables. The output field table of the <a href="#">show route</a> command does not display entries for private, or hidden, routing tables in Junos OS Release 9.5 and later.



## Sample Output

### show route all

The following example displays a snippet of output from the **show route** command and then displays the same snippet of output from the **show route all** command:

```
user@host> show route
mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
0          *[MPLS/0] 2d 02:24:39, metric 1
            Receive
1          *[MPLS/0] 2d 02:24:39, metric 1
            Receive
2          *[MPLS/0] 2d 02:24:39, metric 1
            Receive
800017     *[VPLS/7] 1d 14:00:16
            > via vt-3/2/0.32769, Pop
800018     *[VPLS/7] 1d 14:00:26
            > via vt-3/2/0.32772, Pop

user@host> show route all
mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
0          *[MPLS/0] 2d 02:19:12, metric 1
            Receive
1          *[MPLS/0] 2d 02:19:12, metric 1
            Receive
2          *[MPLS/0] 2d 02:19:12, metric 1
            Receive
800017     *[VPLS/7] 1d 13:54:49
            > via vt-3/2/0.32769, Pop
800018     *[VPLS/7] 1d 13:54:59
            > via vt-3/2/0.32772, Pop
vt-3/2/0.32769 [VPLS/7] 1d 13:54:49
                Unusable
vt-3/2/0.32772 [VPLS/7] 1d 13:54:59
                Unusable
```



## show route aspath-regex

<b>Syntax</b>	<code>show route aspath-regex <i>regular-expression</i></code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>
<b>Syntax (EX Series Switches)</b>	<code>show route aspath-regex <i>regular-expression</i></code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display the entries in the routing table that match the specified autonomous system (AS) path regular expression.
<b>Options</b>	<p><b><i>regular-expression</i></b>—Regular expression that matches an entire AS path.</p> <p><b><i>logical-system (all   <i>logical-system-name</i>)</i></b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Additional Information</b>	<p>You can specify a regular expression as:</p> <ul style="list-style-type: none"> <li>• An individual AS number</li> <li>• A period wildcard used in place of an AS number</li> <li>• An AS path regular expression that is enclosed in parentheses</li> </ul> <p>You also can include the operators described in the table of AS path regular expression operators in the <i>Junos Policy Framework Configuration Guide</i>. The following list summarizes these operators:</p> <ul style="list-style-type: none"> <li>• <b><i>{m,n}</i></b>—At least <i>m</i> and at most <i>n</i> repetitions of the AS path term.</li> <li>• <b><i>{m}</i></b>—Exactly <i>m</i> repetitions of the AS path term.</li> <li>• <b><i>{m,}</i></b>—<i>m</i> or more repetitions of the AS path term.</li> <li>• <b><i>*</i></b>—Zero or more repetitions of an AS path term.</li> <li>• <b><i>+</i></b>—One or more repetitions of an AS path term.</li> <li>• <b><i>?</i></b>—Zero or one repetition of an AS path term.</li> <li>• <b><i>aspath_term   aspath_term</i></b>—Match one of the two AS path terms.</li> </ul> <p>When you specify more than one AS number or path term, or when you include an operator in the regular expression, enclose the entire regular expression in quotation marks. For example, to match any path that contains AS number 234, specify the following command:</p> <pre>show route aspath-regex ".* 234 .*"</pre>
<b>Required Privilege Level</b>	view



- List of Sample Output**    [show route aspath-regex \(Matching a Specific AS Number\) on page 2478](#)  
                                  [show route aspath-regex \(Matching Any Path with Two AS Numbers\) on page 2478](#)
- Output Fields**        For information about output fields, see the output field table for the [show route](#) command.

## Sample Output

### [show route aspath-regex \(Matching a Specific AS Number\)](#)

```
user@host> show route aspath-regex 65477
inet.0: 46411 destinations, 46411 routes (46409 active, 0 holddown, 2 hidden)
+ = Active Route, - = Last Active, * = Both

111.222.1.0/25      *[BGP/170] 00:08:48, localpref 100, from 111.222.2.24
                   AS Path: [65477] ({65488 65535}) IGP
                   to 111.222.18.225 via fpa0.0(111.222.18.233)
111.222.1.128/25   *[IS-IS/15] 09:15:37, metric 37, tag 1
                   to 111.222.18.225 via fpa0.0(111.222.18.233)
                   [BGP/170] 00:08:48, localpref 100, from 111.222.2.24
                   AS Path: [65477] ({65488 65535}) IGP
                   to 111.222.18.225 via fpa0.0(111.222.18.233)
...
```

### [show route aspath-regex \(Matching Any Path with Two AS Numbers\)](#)

```
user@host> show route aspath-regex ?.* 234 3561.*?
inet.0: 46351 destinations, 46351 routes (46349 active, 0 holddown, 2 hidden)
+ = Active Route, - = Last Active, * = Both

9.20.0.0/17        *[BGP/170] 01:35:00, localpref 100, from 131.103.20.49
                   AS Path: [666] 234 3561 2685 2686 Incomplete
                   to 192.156.169.1 via 192.156.169.14(so-0/0/0)
12.10.231.0/24     *[BGP/170] 01:35:00, localpref 100, from 131.103.20.49
                   AS Path: [666] 234 3561 5696 7369 IGP
                   to 192.156.169.1 via 192.156.169.14(so-0/0/0)
24.64.32.0/19      *[BGP/170] 01:34:59, localpref 100, from 131.103.20.49
                   AS Path: [666] 234 3561 6327 IGP
                   to 192.156.169.1 via 192.156.169.14(so-0/0/0)
...
```



## show route best

---

<b>Syntax</b>	show route best <i>destination-prefix</i> <brief   detail   extensive   terse> <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	show route best <i>destination-prefix</i> <brief   detail   extensive   terse>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display the route in the routing table that is the best route to the specified address or range of addresses. The best route is the longest matching route.
<b>Options</b>	<b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b> .  <b><i>destination-prefix</i></b> —Address or range of addresses.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route best on page 2480</a> <a href="#">show route best detail on page 2480</a> <a href="#">show route best extensive on page 2481</a> <a href="#">show route best terse on page 2481</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.



## Sample Output

### show route best

```

user@host> show route best 10.255.70.103
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
10.255.70.103/32    *[OSPF/10] 1d 13:19:20, metric 2
                  > to 10.31.1.6 via ge-3/1/0.0
                  via so-0/3/0.0

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
10.255.70.103/32    *[RSVP/7] 1d 13:20:13, metric 2
                  > via so-0/3/0.0, label-switched-path green-r1-r3

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.0.0.0/8          *[Direct/0] 2d 01:43:34
                  > via fxp2.0
                  [Direct/0] 2d 01:43:34
                  > via fxp1.0

```

### show route best detail

```

user@host> show route best 10.255.70.103 detail
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
10.255.70.103/32 (1 entry, 1 announced)
    *OSPF    Preference: 10
             Next-hop reference count: 9
             Next hop: 10.31.1.6 via ge-3/1/0.0, selected
             Next hop: via so-0/3/0.0
             State: <Active Int>
             Local AS:    69
             Age: 1d 13:20:06      Metric: 2
             Area: 0.0.0.0
             Task: OSPF
             Announcement bits (2): 0-KRT 3-Resolve tree 2
             AS path: I

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
10.255.70.103/32 (1 entry, 1 announced)
    State: <FlashAll>
    *RSVP    Preference: 7
             Next-hop reference count: 5
             Next hop: via so-0/3/0.0 weight 0x1, selected
             Label-switched-path green-r1-r3
             Label operation: Push 100016
             State: <Active Int>
             Local AS:    69
             Age: 1d 13:20:59      Metric: 2
             Task: RSVP
             Announcement bits (1): 1-Resolve tree 2
             AS path: I

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
10.0.0.0/8 (2 entries, 0 announced)
    *Direct Preference: 0
             Next hop type: Interface

```



```

Next-hop reference count: 1
Next hop: via fxp2.0, selected
State: <Active Int>
Age: 2d 1:44:20
Task: IF
AS path: I
Direct Preference: 0
Next hop type: Interface
Next-hop reference count: 1
Next hop: via fxp1.0, selected
State: <NotBest Int>
Inactive reason: No difference
Age: 2d 1:44:20
Task: IF
AS path: I

```

### show route best extensive

The output for the **show route best extensive** command is identical to that for the **show route best detail** command. For sample output, see [show route best detail on page 2480](#).

### show route best terse

```

user@host> show route best 10.255.70.103 terse
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
* 10.255.70.103/32  0  10           2           >10.31.1.6
                                     so-0/3/0.0

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
* 10.255.70.103/32  R   7           2           >so-0/3/0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
* 10.0.0.0/8        D   0           0           >fxp2.0
                   D   0           0           >fxp1.0

```



## show route brief

---

<b>Syntax</b>	show route brief <destination-prefix> <logical-system (all   logical-system-name)>
<b>Syntax (EX Series Switches)</b>	show route brief <destination-prefix>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display brief information about the active entries in the routing tables.
<b>Options</b>	<b>none</b> —Display all active entries in the routing table.  <b>destination-prefix</b> —(Optional) Display active entries for the specified address or range of addresses.  <b>logical-system (all   logical-system-name)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route brief on page 2483</a>
<b>Output Fields</b>	For information about output fields, see the Output Field table of the <a href="#">show route</a> command.



## Sample Output

### show route brief

```

user@host> show route brief
inet.0: 10 destinations, 10 routes (9 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0      *[Static/5] 1w5d 20:30:29
                Discard
10.255.245.51/32 *[Direct/0] 2w4d 13:11:14
                > via lo0.0
172.16.0.0/12  *[Static/5] 2w4d 13:11:14
                > to 192.168.167.254 via fxp0.0
192.168.0.0/18 *[Static/5] 1w5d 20:30:29
                > to 192.168.167.254 via fxp0.0
192.168.40.0/22 *[Static/5] 2w4d 13:11:14
                > to 192.168.167.254 via fxp0.0
192.168.64.0/18 *[Static/5] 2w4d 13:11:14
                > to 192.168.167.254 via fxp0.0
192.168.164.0/22 *[Direct/0] 2w4d 13:11:14
                > via fxp0.0
192.168.164.51/32 *[Local/0] 2w4d 13:11:14
                Local via fxp0.0
207.17.136.192/32 *[Static/5] 2w4d 13:11:14
                > to 192.168.167.254 via fxp0.0
green.inet.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
100.101.0.0/16  *[Direct/0] 1w5d 20:30:28
                > via fe-0/0/3.0
100.101.2.3/32  *[Local/0] 1w5d 20:30:28
                Local via fe-0/0/3.0
224.0.0.5/32    *[OSPF/10] 1w5d 20:30:29, metric 1
                MultiRecv

```



## show route community

---

Syntax	show route community <i>as-number:community-value</i> <brief   detail   extensive   terse> <logical-system (all   <i>logical-system-name</i> )>
Syntax (EX Series Switches)	show route community <i>as-number:community-value</i> <brief   detail   extensive   terse>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
Description	Display the route entries in each routing table that are members of a Border Gateway Protocol (BGP) community.
Options	<p><i>as-number:community-value</i>—One or more community identifiers. <i>as-number</i> is the AS number, and <i>community-value</i> is the community identifier. When you specify more than one community identifier, enclose the identifiers in double quotation marks. Community identifiers can include wildcards.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
Additional Information	Specifying the community option displays all routes matching the community found within the routing table. The community option does not limit the output to only the routes being advertised to the neighbor after any egress routing policy.
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">show route detail on page 2494</a></li></ul>
List of Sample Output	<a href="#">show route community on page 2485</a>
Output Fields	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.



## Sample Output

```
show route community user@host> show route community 234:80
inet.0: 46511 destinations, 46511 routes (46509 active, 0 holddown, 2 hidden)
+ = Active Route, - = Last Active, * = Both

4.0.0.0/8          *[BGP/170] 03:33:07, localpref 100, from 131.103.20.49
                   AS Path: {666} 234 2548 1 IGP
                   to 192.156.169.1 via 192.156.169.14(so-0/0/0)
6.0.0.0/8          *[BGP/170] 03:33:07, localpref 100, from 131.103.20.49
                   AS Path: {666} 234 2548 568 721 Incomplete
                   to 192.156.169.1 via 192.156.169.14(so-0/0/0)
9.2.0.0/16         *[BGP/170] 03:33:06, localpref 100, from 131.103.20.49
                   AS Path: {666} 234 2548 1673 1675 1747 IGP
                   to 192.156.169.1 via 192.156.169.14(so-0/0/0)
```



## show route community-name

---

<b>Syntax</b>	<code>show route community-name <i>community-name</i></code> <brief   detail   extensive   terse> <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	<code>show route community-name <i>community-name</i></code> <brief   detail   extensive   terse>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display the route entries in each routing table that are members of a Border Gateway Protocol (BGP) community, specified by a community name.
<b>Options</b>	<i>community-name</i> —Name of the community.  brief   detail   extensive   terse—(Optional) Display the specified level of output.  logical-system (all   <i>logical-system-name</i> )—(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route community-name on page 2487</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.



## Sample Output

**show route  
community-name**

```
user@host> show route community-name red-com
inet.0: 17 destinations, 17 routes (16 active, 0 holddown, 1 hidden)

inet.3: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

instance1.inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 11 destinations, 11 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.245.212/32 *[BGP/170] 00:04:40, localpref 100, from 10.255.245.204
                  AS path: 300 I
                  > to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix
20.20.20.20/32    *[BGP/170] 00:04:40, localpref 100, from 10.255.245.204
                  AS path: I
                  > to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix
100.1.4.0/24     *[BGP/170] 00:04:40, localpref 100, from 10.255.245.204
                  AS path: I
                  > to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

bgp.l3vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.245.204:10:10.255.245.212/32
                  *[BGP/170] 00:06:40, localpref 100, from 10.255.245.204
                  AS path: 300 I
                  > to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix
10.255.245.204:10:20.20.20.20/32
                  *[BGP/170] 00:36:02, localpref 100, from 10.255.245.204
                  AS path: I
                  > to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix
10.255.245.204:10:100.1.4.0/24
                  *[BGP/170] 00:36:02, localpref 100, from 10.255.245.204
                  AS path: I
                  > to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

instance1.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```



## show route damping

<b>Syntax</b>	show route damping (decayed   history   suppressed) <brief   detail   extensive   terse> <logical-system (all   <i>logical-system-name</i> )>	
<b>Syntax (EX Series Switch and QFX Series)</b>	show route damping (decayed   history   suppressed) <brief   detail   extensive   terse>	
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.3 for the QFX Series.	
<b>Description</b>	Display the BGP routes for which updates might have been reduced because of route flap damping.	
<b>Options</b>	<p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.</p> <p><b>decayed</b>—Display route damping entries that might no longer be valid, but are not suppressed.</p> <p><b>history</b>—Display entries that have already been withdrawn, but have been logged.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>suppressed</b>—Display entries that have been suppressed and are no longer being installed into the forwarding table or exported by routing protocols.</p>	
<b>Required Privilege Level</b>	view	
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">clear bgp damping on page 3072</a></li> <li>• <a href="#">show policy damping on page 3103</a></li> </ul>	
<b>List of Sample Output</b>	<a href="#">show route damping decayed detail on page 2492</a> <a href="#">show route damping history on page 2492</a> <a href="#">show route damping history detail on page 2492</a>	
<b>Output Fields</b>	Table 187 on page 2488 lists the output fields for the <b>show route damping</b> command. Output fields are listed in the approximate order in which they appear.	

Table 187: show route damping Output Fields

Field Name	Field Description	Level of Output
<i>routing-table-name</i>	Name of the routing table—for example, <i>inet.0</i> .	All levels
<i>destinations</i>	Number of destinations for which there are routes in the routing table.	All levels



Table 187: show route damping Output Fields (*continued*)

Field Name	Field Description	Level of Output
<i>number routes</i>	Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> <li>• <b>active</b></li> <li>• <b>holddown</b> (routes that are in a pending state before being declared inactive)</li> <li>• <b>hidden</b> (the routes are not used because of a routing policy)</li> </ul>	All levels
<i>destination-prefix (entry, announced)</i>	Destination prefix. The <b>entry</b> value is the number of routes for this destination, and the <b>announced</b> value is the number of routes being announced for this destination.	<b>detail extensive</b>
<i>[protocol, preference]</i>	Protocol from which the route was learned and the preference value for the route. <ul style="list-style-type: none"> <li>• <b>+</b>—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>-</b>—A hyphen indicates the last active route.</li> <li>• <b>*</b>—An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul> <p>In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value.</p>	All levels
<b>Next-hop reference count</b>	Number of references made to the next hop.	<b>detail extensive</b>
<b>Source</b>	IP address of the route source.	<b>detail extensive</b>
<b>Next hop</b>	Network layer address of the directly reachable neighboring system.	<b>detail extensive</b>
<b>via</b>	Interface used to reach the next hop. If there is more than one interface available to the next hop, the interface that is actually used is followed by the word <b>Selected</b> .	<b>detail extensive</b>
<b>Protocol next hop</b>	Network layer address of the remote routing device that advertised the prefix. This address is used to derive a forwarding next hop.	<b>detail extensive</b>
<b>Indirect next hop</b>	Index designation used to specify the mapping between protocol next hops, tags, kernel export policy, and the forwarding next hops.	<b>detail extensive</b>
<b>State</b>	Flags for this route. For a description of possible values for this field, see the output field table for the <a href="#">show route detail</a> command.	<b>detail extensive</b>
<b>Local AS</b>	AS number of the local routing device.	<b>detail extensive</b>
<b>Peer AS</b>	AS number of the peer routing device.	<b>detail extensive</b>



Table 187: show route damping Output Fields (*continued*)

Field Name	Field Description	Level of Output
Age	How long the route has been known.	detail extensive
Metric	Metric for the route.	detail extensive
Task	Name of the protocol that has added the route.	detail extensive
Announcement bits	List of protocols that announce this route. <b>n-Resolve inet</b> indicates that the route is used for route resolution for next hops found in the routing table. <b>n</b> is an index used by Juniper Networks customer support only.	detail extensive
AS path	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>I—IGP.</li> <li>E—EGP.</li> <li>?—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li>[ ]—Brackets enclose the local AS number associated with the AS path if more than one AS number is configured on the routing device or if AS path prepending is configured.</li> <li>{ }—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li>( )—Parentheses enclose a confederation.</li> <li>( [ ] )—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>	All levels
to	Next hop to the destination. An angle bracket (>) indicates that the route is the selected route.	brief none
via	Interface used to reach the next hop. If there is more than one interface available to the next hop, the interface that is actually used is followed by the word <b>Selected</b> .	brief none
Communities	Community path attribute for the route. See the output field table for the <a href="#">show route detail</a> command.	detail extensive
Localpref	Local preference value included in the route.	All levels
Router ID	BGP router ID as advertised by the neighbor in the open message.	detail extensive
Merit (last update/now)	Last updated and current figure-of-merit value.	detail extensive



Table 187: show route damping Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>damping-parameters</b>	Name that identifies the damping parameters used, which is defined in the damping statement at the <b>[edit policy-options]</b> hierarchy level.	<b>detail extensive</b>
<b>Last update</b>	Time of most recent change in path attributes.	<b>detail extensive</b>
<b>First update</b>	Time of first change in path attributes, which started the route damping process.	<b>detail extensive</b>
<b>Flaps</b>	Number of times the route has gone up or down or its path attributes have changed.	<b>detail extensive</b>
<b>Suppressed</b>	( <b>suppressed</b> keyword only) This route is currently suppressed. A suppressed route does not appear in the forwarding table and routing protocols do not export it.	All levels
<b>Reusable in</b>	( <b>suppressed</b> keyword only) Time when a suppressed route will again be available.	All levels
<b>Preference will be</b>	( <b>suppressed</b> keyword only) Preference value that will be applied to the route when it is again active.	All levels



## Sample Output

### show route damping decayed detail

```

user@host> show route damping decayed detail
inet.0: 173319 destinations, 1533668 routes (172625 active, 4 holddown, 108083
hidden)
10.0.111.0/24 (7 entries, 1 announced)
  *BGP      Preference: 170/-101
            Next-hop reference count: 151973
            Source: 172.23.2.129
            Next hop: via so-1/2/0.0
            Next hop: via so-5/1/0.0, selected
            Next hop: via so-6/0/0.0
            Protocol next hop: 172.23.2.129
            Indirect next hop: 89a1a00 264185
            State: <Active Ext>
            Local AS: 65000 Peer AS: 65490
            Age: 3:28      Metric2: 0
            Task: BGP_65490.172.23.2.129+179
            Announcement bits (6): 0-KRT 1-RT 4-KRT 5-BGP.0.0.0.0+179

        6-Resolve tree 2 7-Resolve tree 3
        AS path: 65490 65520 65525 65525 65525 65525 I ()
        Communities: 65501:390 65501:2000 65501:3000 65504:701
        Localpref: 100
        Router ID: 172.23.2.129
        Merit (last update/now): 1934/1790
        damping-parameters: damping-high
        Last update:          00:03:28 First update:          00:06:40
        Flaps: 2

```

### show route damping history

```

user@host> show route damping history
inet.0: 173320 destinations, 1533529 routes (172624 active, 6 holddown, 108122
hidden)
+ = Active Route, - = Last Active, * = Both

10.108.0.0/15      [BGP ] 2d 22:47:58, localpref 100
                   AS path: 65220 65501 65502 I
                   > to 192.168.60.85 via so-3/1/0.0

```

### show route damping history detail

```

user@host> show route damping history detail
inet.0: 173319 destinations, 1533435 routes (172627 active, 2 holddown, 108105
hidden)
10.108.0.0/15 (3 entries, 1 announced)
  BGP      /-101
            Next-hop reference count: 69058
            Source: 192.168.60.85
            Next hop: 192.168.60.85 via so-3/1/0.0, selected
            State: <Hidden Ext>
            Inactive reason: Unusable path
            Local AS: 65000 Peer AS: 65220
            Age: 2d 22:48:10
            Task: BGP_65220.192.168.60.85+179
            AS path: 65220 65501 65502 I ()
            Communities: 65501:390 65501:2000 65501:3000 65504:3561
            Localpref: 100
            Router ID: 192.168.80.25
            Merit (last update/now): 1000/932
            damping-parameters: set-normal

```



Last update: 00:01:05 First update: 00:01:05  
Flaps: 1



## show route detail

<b>Syntax</b>	show route detail <destination-prefix> <logical-system (all   logical-system-name)>
<b>Syntax (EX Series Switches)</b>	show route detail <destination-prefix>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display detailed information about the active entries in the routing tables.
<b>Options</b>	<p><b>none</b>—Display all active entries in the routing table on all systems.</p> <p><b>destination-prefix</b>—(Optional) Display active entries for the specified address or range of addresses.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route detail on page 2503</a> <a href="#">show route detail (with BGP Multipath) on page 2508</a>
<b>Output Fields</b>	<p><a href="#">Table 188 on page 2494</a> describes the output fields for the <b>show route detail</b> command. Output fields are listed in the approximate order in which they appear.</p>

**Table 188: show route detail Output Fields**

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table (for example, inet.0).
<i>number destinations</i>	Number of destinations for which there are routes in the routing table.
<i>number routes</i>	Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> <li><b>active</b> (routes that are active)</li> <li><b>holddown</b> (routes that are in the pending state before being declared inactive)</li> <li><b>hidden</b> (routes that are not used because of a routing policy)</li> </ul>



Table 188: show route detail Output Fields (*continued*)

Field Name	Field Description
<i>route-destination</i> (entry, announced)	<p>Route destination (for example:10.0.0.1/24). The <b>entry</b> value is the number of routes for this destination, and the <b>announced</b> value is the number of routes being announced for this destination. Sometimes the route destination is presented in another format, such as:</p> <ul style="list-style-type: none"> <li>• <b>MPLS-label</b> (for example, 80001).</li> <li>• <b>interface-name</b> (for example, ge-1/0/2).</li> <li>• <b>neighbor-address:control-word-status:encapsulation type:vc-id:source</b> (Layer 2 circuit only; for example, 10.1.1.195:NoCtrlWord:1:1:Local/96). <ul style="list-style-type: none"> <li>• <b>neighbor-address</b>—Address of the neighbor.</li> <li>• <b>control-word-status</b>—Whether the use of the control word has been negotiated for this virtual circuit: <b>NoCtrlWord</b> or <b>CtrlWord</b>.</li> <li>• <b>encapsulation type</b>—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport.</li> <li>• <b>vc-id</b>—Virtual circuit identifier.</li> <li>• <b>source</b>—Source of the advertisement: <b>Local</b> or <b>Remote</b>.</li> </ul> </li> </ul>
label stacking	<p>(Next-to-the-last-hop routing device for MPLS only) Depth of the MPLS label stack, where the label-popping operation is needed to remove one or more labels from the top of the stack. A pair of routes is displayed, because the pop operation is performed only when the stack depth is two or more labels.</p> <ul style="list-style-type: none"> <li>• <b>S=0 route</b> indicates that a packet with an incoming label stack depth of 2 or more exits this routing device with one fewer label (the label-popping operation is performed).</li> <li>• If there is no <b>S=</b> information, the route is a normal MPLS route, which has a stack depth of 1 (the label-popping operation is not performed).</li> </ul>
[ <i>protocol, preference</i> ]	<p>Protocol from which the route was learned and the preference value for the route.</p> <ul style="list-style-type: none"> <li>• <b>+—</b>A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>- —</b>A hyphen indicates the last active route.</li> <li>• <b>*—</b>An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul> <p>In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value.</p>
Level	<p>(IS-IS only). In IS-IS, a single AS can be divided into smaller groups called areas. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring Level 1 and Level 2 intermediate systems. Level 1 systems route within an area. When the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs.</p>
Route Distinguisher	IP subnet augmented with a 64-bit prefix.
Next-hop type	Type of next hop. For a description of possible values for this field, see <a href="#">Table 189 on page 2498</a> .



Table 188: show route detail Output Fields (*continued*)

Field Name	Field Description
<b>Next-hop reference count</b>	Number of references made to the next hop.
<b>Flood nexthop branches exceed maximum message</b>	Indicates that the number of flood next-hop branches exceeded the system limit of 32 branches, and only a subset of the flood next-hop branches were installed in the kernel.
<b>Source</b>	IP address of the route source.
<b>Next hop</b>	Network layer address of the directly reachable neighboring system.
<b>via</b>	<p>Interface used to reach the next hop. If there is more than one interface available to the next hop, the name of the interface that is actually used is followed by the word <b>Selected</b>. This field can also contain the following information:</p> <ul style="list-style-type: none"> <li>• <b>Weight</b>—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.</li> <li>• <b>Balance</b>—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.</li> </ul>
<b>Label-switched-path lsp-path-name</b>	Name of the LSP used to reach the next hop.
<b>Label operation</b>	MPLS label and operation occurring at this routing device. The operation can be <b>pop</b> (where a label is removed from the top of the stack), <b>push</b> (where another label is added to the label stack), or <b>swap</b> (where a label is replaced by another label).
<b>Interface</b>	(Local only) Local interface name.
<b>Protocol next hop</b>	Network layer address of the remote routing device that advertised the prefix. This address is used to derive a forwarding next hop.
<b>Indirect next hop</b>	Index designation used to specify the mapping between protocol next hops, tags, kernel export policy, and the forwarding next hops.
<b>State</b>	State of the route (a route can be in more than one state). See <a href="#">Table 190 on page 2500</a> .
<b>Local AS</b>	AS number of the local routing device.
<b>Age</b>	How long the route has been known.
<b>AIGP</b>	Accumulated interior gateway protocol (AIGP) BGP attribute.
<b>Metricn</b>	Cost value of the indicated route. For routes within an AS, the cost is determined by IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.



Table 188: show route detail Output Fields (*continued*)

Field Name	Field Description
<b>MED-plus-IGP</b>	Metric value for BGP path selection to which the IGP cost to the next-hop destination has been added.
<b>TTL-Action</b>	For MPLS LSPs, state of the TTL propagation attribute. Can be enabled or disabled for all RSVP-signaled and LDP-signaled LSPs or for specific VRF routing instances.  For sample output, see <a href="#">show route table</a> .
<b>Task</b>	Name of the protocol that has added the route.
<b>Announcement bits</b>	List of protocols that announce this route. <b>n-Resolve inet</b> indicates that the route is used for route resolution for next hops found in the routing table. <b>n</b> is an index used by Juniper Networks customer support only.
<b>AS path</b>	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• <b>I</b>—IGP.</li> <li>• <b>E</b>—EGP.</li> <li>• <b>Recorded</b>—The AS path is recorded by the sample process (sampled).</li> <li>• <b>?</b>—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li>• <b>[ ]</b>—Brackets enclose the number that precedes the AS path. This number represents the number of ASs present in the AS path, when calculated as defined in RFC 4271. This value is used in the AS-path merge process, as defined in RFC 4893.</li> <li>• <b>[ ]</b>—If more than one AS number is configured on the routing device, or if AS path prepending is configured, brackets enclose the local AS number associated with the AS path.</li> <li>• <b>{ }</b>—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li>• <b>( )</b>—Parentheses enclose a confederation.</li> <li>• <b>( [ ] )</b>—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>
<b>VC Label</b>	MPLS label assigned to the Layer 2 circuit virtual connection.
<b>MTU</b>	Maximum transmission unit (MTU) of the Layer 2 circuit.
<b>VLAN ID</b>	VLAN identifier of the Layer 2 circuit.
<b>Prefixes bound to route</b>	Forwarding equivalent class (FEC) bound to this route. Applicable only to routes installed by LDP.
<b>Communities</b>	Community path attribute for the route. See <a href="#">Table 191 on page 2502</a> for all possible values for this field.
<b>Layer2-info: encaps</b>	Layer 2 encapsulation (for example, VPLS).



Table 188: show route detail Output Fields (*continued*)

Field Name	Field Description
<b>control flags</b>	Control flags: <b>none</b> or <b>Site Down</b> .
<b>mtu</b>	Maximum transmission unit (MTU) information.
<b>Label-Base, range</b>	First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device.
<b>status vector</b>	Layer 2 VPN and VPLS network layer reachability information (NLRI).
<b>Accepted Multipath</b>	Current active path when BGP multipath is configured.
<b>Accepted MultipathContrib</b>	Path currently contributing to BGP multipath.
<b>Localpref</b>	Local preference value included in the route.
<b>Router ID</b>	BGP router ID as advertised by the neighbor in the open message.
<b>Primary Routing Table</b>	In a routing table group, the name of the primary routing table in which the route resides.
<b>Secondary Tables</b>	In a routing table group, the name of one or more secondary tables in which the route resides.

Table 189 on page 2498 describes all possible values for the **Next-hop Types** output field.

Table 189: Next-hop Types Output Field Values

Next-Hop Type	Description
<b>Broadcast (bcast)</b>	Broadcast next hop.
<b>Deny</b>	Deny next hop.
<b>Discard</b>	Discard next hop.
<b>Flood</b>	Flood next hop. Consists of components called branches, up to a maximum of 32 branches. Each flood next-hop branch sends a copy of the traffic to the forwarding interface. Used by point-to-multipoint RSVP, point-to-multipoint LDP, point-to-multipoint CCC, and multicast.
<b>Hold</b>	Next hop is waiting to be resolved into a unicast or multicast type.
<b>Indexed (idxd)</b>	Indexed next hop.



Table 189: Next-hop Types Output Field Values (*continued*)

Next-Hop Type	Description
<b>Indirect (indr)</b>	Used with applications that have a protocol next hop address that is remote. You are likely to see this next-hop type for internal BGP (IBGP) routes when the BGP next hop is a BGP neighbor that is not directly connected.
<b>Interface</b>	Used for a network address assigned to an interface. Unlike the <b>router</b> next hop, the <b>interface</b> next hop does not reference any specific node on the network.
<b>Local (locl)</b>	Local address on an interface. This next-hop type causes packets with this destination address to be received locally.
<b>Multicast (mcst)</b>	Wire multicast next hop (limited to the LAN).
<b>Multicast discard (mdsc)</b>	Multicast discard.
<b>Multicast group (mgrp)</b>	Multicast group member.
<b>Receive (recv)</b>	Receive.
<b>Reject (rjct)</b>	Discard. An ICMP unreachable message was sent.
<b>Resolve (rslv)</b>	Resolving next hop.
<b>Routed multicast (mcrt)</b>	Regular multicast next hop.
<b>Router</b>	<p>A specific node or set of nodes to which the routing device forwards packets that match the route prefix.</p> <p>To qualify as next-hop type router, the route must meet the following criteria:</p> <ul style="list-style-type: none"> <li>• Must not be a direct or local subnet for the routing device.</li> <li>• Must have a next hop that is directly connected to the routing device.</li> </ul>
<b>Table</b>	Routing table next hop.
<b>Unicast (ucst)</b>	Unicast.
<b>Unilist (ulst)</b>	List of unicast next hops. A packet sent to this next hop goes to any next hop in the list.

Table 190 on page 2500 describes all possible values for the **State** output field. A route can be in more than one state (for example, **<Active NoReadvrt Int Ext>**).



Table 190: State Output Field Values

Value	Description
<b>Accounting</b>	Route needs accounting.
<b>Active</b>	Route is active.
<b>Always Compare MED</b>	Path with a lower multiple exit discriminator (MED) is available.
<b>AS path</b>	Shorter AS path is available.
<b>Cisco Non-deterministic MED selection</b>	Cisco nondeterministic MED is enabled, and a path with a lower MED is available.
<b>Clone</b>	Route is a clone.
<b>Cluster list length</b>	Length of cluster list sent by the route reflector.
<b>Delete</b>	Route has been deleted.
<b>Ex</b>	Exterior route.
<b>Ext</b>	BGP route received from an external BGP neighbor.
<b>FlashAll</b>	Forces all protocols to be notified of a change to any route, active or inactive, for a prefix. When not set, protocols are informed of a prefix only when the active route changes.
<b>Hidden</b>	Route not used because of routing policy.
<b>IfCheck</b>	Route needs forwarding RPF check.
<b>IGP metric</b>	Path through next hop with lower IGP metric is available.
<b>Inactive reason</b>	Flags for this route, which was not selected as best for a particular destination.
<b>Initial</b>	Route being added.
<b>Int</b>	Interior route.
<b>Int Ext</b>	BGP route received from an internal BGP peer or a BGP confederation peer.
<b>Interior &gt; Exterior &gt; Exterior via Interior</b>	Direct, static, IGP, or EBGp path is available.
<b>Local Preference</b>	Path with a higher local preference value is available.
<b>Martian</b>	Route is a martian (ignored because it is obviously invalid).



Table 190: State Output Field Values (*continued*)

Value	Description
<b>MartianOK</b>	Route exempt from martian filtering.
<b>Next hop address</b>	Path with lower metric next hop is available.
<b>No difference</b>	Path from neighbor with lower IP address is available.
<b>NoReadvrt</b>	Route not to be advertised.
<b>NotBest</b>	Route not chosen because it does not have the lowest MED.
<b>Not Best in its group</b>	Incoming BGP AS is not the best of a group (only one AS can be the best).
<b>NotInstall</b>	Route not to be installed in the forwarding table.
<b>Number of gateways</b>	Path with a greater number of next hops is available.
<b>Origin</b>	Path with a lower origin code is available.
<b>Pending</b>	Route pending because of a hold-down configured on another route.
<b>Release</b>	Route scheduled for release.
<b>RIB preference</b>	Route from a higher-numbered routing table is available.
<b>Route Distinguisher</b>	64-bit prefix added to IP subnets to make them unique.
<b>Route Metric or MED comparison</b>	Route with a lower metric or MED is available.
<b>Route Preference</b>	Route with lower preference value is available
<b>Router ID</b>	Path through a neighbor with lower ID is available.
<b>Secondary</b>	Route not a primary route.
<b>Unusable path</b>	Path is not usable because of one of the following conditions: <ul style="list-style-type: none"> <li>• The route is damped.</li> <li>• The route is rejected by an import policy.</li> <li>• The route is unresolved.</li> </ul>
<b>Update source</b>	Last tiebreaker is the lowest IP address value.

Table 191 on page 2502 describes the possible values for the **Communities** output field.



Table 191: Communities Output Field Values

Value	Description
<i>area-number</i>	4 bytes, encoding a 32-bit area number. For AS-external routes, the value is <b>0</b> . A nonzero value identifies the route as internal to the OSPF domain, and as within the identified area. Area numbers are relative to a particular OSPF domain.
<b>bandwidth: local AS number:link-bandwidth-number</b>	Link-bandwidth community value used for unequal-cost load balancing. When BGP has several candidate paths available for multipath purposes, it does not perform unequal-cost load balancing according to the link-bandwidth community unless all candidate paths have this attribute.
<b>domain-id</b>	Unique configurable number that identifies the OSPF domain.
<b>domain-id-vendor</b>	Unique configurable number that further identifies the OSPF domain.
<i>link-bandwidth-number</i>	Link-bandwidth number: from <b>0</b> through <b>4,294,967,295</b> (bytes per second).
<i>local AS number</i>	Local AS number: from <b>1</b> through <b>65,535</b> .
<i>options</i>	1 byte. Currently this is only used if the route type is <b>5</b> or <b>7</b> . Setting the least significant bit in the field indicates that the route carries a type 2 metric.
<b>origin</b>	(Used with VPNs) Identifies where the route came from.
<i>ospf-route-type</i>	1 byte, encoded as <b>1</b> or <b>2</b> for intra-area routes (depending on whether the route came from a type 1 or a type 2 LSA); <b>3</b> for summary routes; <b>5</b> for external routes (area number must be <b>0</b> ); <b>7</b> for NSSA routes; or <b>129</b> for sham link endpoint addresses.
<b>route-type-vendor</b>	Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute <b>0x8000</b> . The format is <b>area-number:ospf-route-type:options</b> .
<b>rte-type</b>	Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute <b>0x0306</b> . The format is <b>area-number:ospf-route-type:options</b> .
<b>target</b>	Defines which VPN the route participates in; <b>target</b> has the format <b>32-bit IP address:16-bit number</b> . For example, 10.19.0.0:100.
<b>unknown IANA</b>	Incoming IANA codes with a value between <b>0x1</b> and <b>0x7fff</b> . This code of the BGP extended community attribute is accepted, but it is not recognized.
<b>unknown OSPF vendor community</b>	Incoming IANA codes with a value above <b>0x8000</b> . This code of the BGP extended community attribute is accepted, but it is not recognized.



## Sample Output

show route detail

user@host> show route detail

```
inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 29
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 1:31:43
    Task: RT
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I

10.31.1.0/30 (2 entries, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 2
    Next hop: via so-0/3/0.0, selected
    State: <Active Int>
    Local AS: 69
    Age: 1:30:17
    Task: IF
    Announcement bits (1): 3-Resolve tree 2
    AS path: I
  OSPF Preference: 10
    Next-hop reference count: 1
    Next hop: via so-0/3/0.0, selected
    State: <Int>
    Inactive reason: Route Preference
    Local AS: 69
    Age: 1:30:17 Metric: 1
    Area: 0.0.0.0
    Task: OSPF
    AS path: I

10.31.1.1/32 (1 entry, 1 announced)
  *Local Preference: 0
    Next hop type: Local
    Next-hop reference count: 7
    Interface: so-0/3/0.0
    State: <Active NoReadvrt Int>
    Local AS: 69
    Age: 1:30:20
    Task: IF
    Announcement bits (1): 3-Resolve tree 2
    AS path: I

...

10.31.2.0/30 (1 entry, 1 announced)
  *OSPF Preference: 10
    Next-hop reference count: 9
    Next hop: via so-0/3/0.0
    Next hop: 10.31.1.6 via ge-3/1/0.0, selected
    State: <Active Int>
    Local AS: 69
    Age: 1:29:56 Metric: 2
```



```
Area: 0.0.0.0
Task: OSPF
Announcement bits (2): 0-KRT 3-Resolve tree 2
AS path: I

...

224.0.0.2/32 (1 entry, 1 announced)
  *PIM Preference: 0
      Next-hop reference count: 18
      State: <Active NoReadvrt Int>
      Local AS: 69
      Age: 1:31:45
      Task: PIM Recv
      Announcement bits (2): 0-KRT 3-Resolve tree 2
      AS path: I

...

224.0.0.22/32 (1 entry, 1 announced)
  *IGMP Preference: 0
      Next-hop reference count: 18
      State: <Active NoReadvrt Int>
      Local AS: 69
      Age: 1:31:43
      Task: IGMP
      Announcement bits (2): 0-KRT 3-Resolve tree 2
      AS path: I

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

10.255.70.103/32 (1 entry, 1 announced)
  State: <FlashAll>
  *RSVP Preference: 7
      Next-hop reference count: 6
      Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
      Label-switched-path green-r1-r3
      Label operation: Push 100096
      State: <Active Int>
      Local AS: 69
      Age: 1:25:49 Metric: 2
      Task: RSVP
      Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
      AS path: I

10.255.71.238/32 (1 entry, 1 announced)
  State: <FlashAll>
  *RSVP Preference: 7
      Next-hop reference count: 6
      Next hop: via so-0/3/0.0 weight 0x1, selected
      Label-switched-path green-r1-r2
      State: <Active Int>
      Local AS: 69
      Age: 1:25:49 Metric: 1
      Task: RSVP
      Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
      AS path: I

private__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```



47.0005.80ff.f800.0000.0108.0001.0102.5507.1052/152 (1 entry, 0 announced)

```
*Direct Preference: 0
  Next hop type: Interface
  Next-hop reference count: 1
  Next hop: via lo0.0, selected
  State: <Active Int>
  Local AS: 69
  Age: 1:31:44
  Task: IF
  AS path: I
```

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

0 (1 entry, 1 announced)

```
*MPLS Preference: 0
  Next hop type: Receive
  Next-hop reference count: 6
  State: <Active Int>
  Local AS: 69
  Age: 1:31:45 Metric: 1
  Task: MPLS
  Announcement bits (1): 0-KRT
  AS path: I
```

...

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

299776 (1 entry, 1 announced)

TSI:

KRT in-kernel 299776 /52 -> {Flood}

```
*RSVP Preference: 7
  Next hop type: Flood
  Next-hop reference count: 130
  Flood nexthop branches exceed maximum
  Address: 0x8ea65d0
```

...

800010 (1 entry, 1 announced)

```
*VPLS Preference: 7
  Next-hop reference count: 2
  Next hop: via vt-3/2/0.32769, selected
  Label operation: Pop
  State: <Active Int>
  Age: 1:29:30
  Task: Common L2 VC
  Announcement bits (1): 0-KRT
  AS path: I
```

vt-3/2/0.32769 (1 entry, 1 announced)

```
*VPLS Preference: 7
  Next-hop reference count: 2
  Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
  Label-switched-path green-r1-r3
  Label operation: Push 800012, Push 100096(top)
  Protocol next hop: 10.255.70.103
  Push 800012
  Indirect next hop: 87272e4 1048574
  State: <Active Int>
  Age: 1:29:30 Metric2: 2
  Task: Common L2 VC
  Announcement bits (2): 0-KRT 1-Common L2 VC
```



```
AS path: I
Communities: target:11111:1 Layer2-info: encaps:VPLS,
control flags:, mtu: 0

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

abcd::10:255:71:52/128 (1 entry, 0 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via lo0.0, selected
    State: <Active Int>
    Local AS: 69
    Age: 1:31:44
    Task: IF
    AS path: I

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via lo0.0, selected
    State: <Active NoReadvrt Int>
    Local AS: 69
    Age: 1:31:44
    Task: IF
    AS path: I

ff02::2/128 (1 entry, 1 announced)
  *PIM Preference: 0
    Next-hop reference count: 18
    State: <Active NoReadvrt Int>
    Local AS: 69
    Age: 1:31:45
    Task: PIM Recv6
    Announcement bits (1): 0-KRT
    AS path: I

ff02::d/128 (1 entry, 1 announced)
  *PIM Preference: 0
    Next-hop reference count: 18
    State: <Active NoReadvrt Int>
    Local AS: 69
    Age: 1:31:45
    Task: PIM Recv6
    Announcement bits (1): 0-KRT
    AS path: I

ff02::16/128 (1 entry, 1 announced)
  *MLD Preference: 0
    Next-hop reference count: 18
    State: <Active NoReadvrt Int>
    Local AS: 69
    Age: 1:31:43
    Task: MLD
    Announcement bits (1): 0-KRT
    AS path: I

private.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
```



```

*Direct Preference: 0
  Next hop type: Interface
  Next-hop reference count: 1
  Next hop: via lo0.16385, selected
  State: <Active NoReadvrt Int>
  Age: 1:31:44
  Task: IF
  AS path: I

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)

10.255.70.103:1:3:1/96 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 10.255.70.103:1
    Next-hop reference count: 7
    Source: 10.255.70.103
    Protocol next hop: 10.255.70.103
    Indirect next hop: 2 no-forward
    State: <Secondary Active Int Ext>
    Local AS: 69 Peer AS: 69
    Age: 1:25:49 Metric2: 1
    AIGP 210
    Task: BGP_69.10.255.70.103+179
    Announcement bits (1): 0-green-l2vpn
    AS path: I
    Communities: target:11111:1 Layer2-info: encaps:VPLS,
    control flags:, mtu: 0
    Label-base: 800008, range: 8
    Localpref: 100
    Router ID: 10.255.70.103
    Primary Routing Table bgp.l2vpn.0

10.255.71.52:1:1:1/96 (1 entry, 1 announced)
  *L2VPN Preference: 170/-1
    Next-hop reference count: 5
    Protocol next hop: 10.255.71.52
    Indirect next hop: 0 -
    State: <Active Int Ext>
    Age: 1:31:40 Metric2: 1
    Task: green-l2vpn
    Announcement bits (1): 1-BGP.0.0.0.0+179
    AS path: I
    Communities: Layer2-info: encaps:VPLS, control flags:Site-Down,
    mtu: 0
    Label-base: 800016, range: 8, status-vector: 0x9F

10.255.71.52:1:5:1/96 (1 entry, 1 announced)
  *L2VPN Preference: 170/-101
    Next-hop reference count: 5
    Protocol next hop: 10.255.71.52
    Indirect next hop: 0 -
    State: <Active Int Ext>
    Age: 1:31:40 Metric2: 1
    Task: green-l2vpn
    Announcement bits (1): 1-BGP.0.0.0.0+179
    AS path: I
    Communities: Layer2-info: encaps:VPLS, control flags:, mtu: 0
    Label-base: 800008, range: 8, status-vector: 0x9F

...

```



```
12circuit.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
10.245.255.63:CtrlWord:4:3:Local/96 (1 entry, 1 announced)
  *L2CKT Preference: 7
    Next hop: via so-1/1/2.0 weight 1, selected
    Label-switched-path my-lsp
    Label operation: Push 100000[0]
    Protocol next hop: 10.245.255.63 Indirect next hop: 86af000 296
    State: <Active Int>
    Local AS: 99
    Age: 10:21
    Task: 12 circuit
    Announcement bits (1): 0-LDP
    AS path: I
    VC Label 100000, MTU 1500, VLAN ID 512
```

#### show route detail (with BGP Multipath)

user@host> show route detail

```
10.1.1.8/30 (2 entries, 1 announced)
  *BGP Preference: 170/-101
    Next hop type: Router, Next hop index: 262142
    Address: 0x901a010
    Next-hop reference count: 2
    Source: 10.1.1.2
    Next hop: 10.1.1.2 via ge-0/3/0.1, selected
    Next hop: 10.1.1.6 via ge-0/3/0.5
    State: <Active Ext>
    Local AS: 1 Peer AS: 2
    Age: 5:04:43
    Task: BGP_2.10.1.1.2+59955
    Announcement bits (1): 0-KRT
    AS path: 2 I
    Accepted Multipath
    Localpref: 100
    Router ID: 1.1.1.2
  BGP Preference: 170/-101
    Next hop type: Router, Next hop index: 678
    Address: 0x8f97520
    Next-hop reference count: 9
    Source: 10.1.1.6
    Next hop: 10.1.1.6 via ge-0/3/0.5, selected
    State: <NotBest Ext>
    Inactive reason: Not Best in its group - Active preferred
    Local AS: 1 Peer AS: 2
    Age: 5:04:43
    Task: BGP_2.10.1.1.6+58198
    AS path: 2 I
    Accepted MultipathContrib
    Localpref: 100
    Router ID: 1.1.1.3
```



## show route exact

---

<b>Syntax</b>	<code>show route exact <i>destination-prefix</i></code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>
<b>Syntax (EX Series Switches)</b>	<code>show route exact <i>destination-prefix</i></code> <code>&lt;brief   detail   extensive   terse&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display only the routes that exactly match the specified address or range of addresses.
<b>Options</b>	<b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b> .  <i>destination-prefix</i> —Address or range of addresses.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route exact on page 2510</a> <a href="#">show route exact detail on page 2510</a> <a href="#">show route exact extensive on page 2510</a> <a href="#">show route exact terse on page 2510</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.



## Sample Output

### show route exact

```
user@host> show route exact 207.17.136.0/24

inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
207.17.136.0/24    *[Static/5] 2d 03:30:22
                  > to 192.168.71.254 via fxp0.0
```

### show route exact detail

```
user@host> show route exact 207.17.136.0/24 detail

inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
207.17.136.0/24 (1 entry, 1 announced)
    *Static Preference: 5
        Next-hop reference count: 29
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Local AS:    69
        Age: 2d 3:30:26
        Task: RT
        Announcement bits (2): 0-KRT 3-Resolve tree 2
        AS path: I
```

### show route exact extensive

```
user@host> show route exact 207.17.136.0/24 extensive

inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
207.17.136.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.0/24 -> {192.168.71.254}
    *Static Preference: 5
        Next-hop reference count: 29
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Local AS:    69
        Age: 1:25:18
        Task: RT
        Announcement bits (2): 0-KRT 3-Resolve tree 2
        AS path: I
```

### show route exact terse

```
user@host> show route exact 207.17.136.0/24 terse

inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both
A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
* 207.17.136.0/24  S   5                      >192.168.71.254
```



## show route export

<b>Syntax</b>	show route export <brief   detail> <instance <instance-name>   routing-table-name> <logical-system (all   logical-system-name)>
<b>Syntax (EX Series Switches)</b>	show route export <brief   detail> <instance <instance-name>   routing-table-name>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display policy-based route export information. Policy-based export simplifies the process of exchanging route information between routing instances.
<b>Options</b>	<p><b>none</b>—(Same as <b>brief</b>.) Display standard information about policy-based export for all instances and routing tables on all systems.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>instance &lt;instance-name&gt;</b>—(Optional) Display a particular routing instance for which policy-based export is currently enabled.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>routing-table-name</b>—(Optional) Display information about policy-based export for all routing tables whose name begins with this string (for example, inet.0 and inet6.0 are both displayed when you run the <b>show route export inet</b> command).</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route export on page 2512</a> <a href="#">show route export detail on page 2512</a> <a href="#">show route export instance detail on page 2512</a>
<b>Output Fields</b>	Table 192 on page 2511 lists the output fields for the <b>show route export</b> command. Output fields are listed in the approximate order in which they appear.

Table 192: show route export Output Fields

Field Name	Field Description	Level of Output
<b>Table</b> or <b>table-name</b>	Name of the routing tables that either import or export routes.	All levels
<b>Routes</b>	Number of routes exported from this table into other tables. If a particular route is exported to different tables, the counter will only increment by one.	<b>brief</b> none
<b>Export</b>	Whether the table is currently exporting routes to other tables: <b>Y</b> or <b>N</b> (Yes or No).	<b>brief</b> none



Table 192: show route export Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Import</b>	Tables currently importing routes from the originator table. (Not displayed for tables that are not exporting any routes.)	<b>detail</b>
<b>Flags</b>	( <b>instance</b> keyword only) Flags for this feature on this instance: <ul style="list-style-type: none"> <li><b>config auto-policy</b>—The policy was deduced from the configured IGP export policies.</li> <li><b>cleanup</b>—Configuration information for this instance is no longer valid.</li> <li><b>config</b>—The instance was explicitly configured.</li> </ul>	<b>detail</b>
<b>Options</b>	( <b>instance</b> keyword only) Configured option displays the type of routing tables the feature handles: <ul style="list-style-type: none"> <li><b>unicast</b>—Indicates <i>instance.inet.0</i>.</li> <li><b>multicast</b>—Indicates <i>instance.inet.2</i>.</li> <li><b>unicast multicast</b>—Indicates <i>instance.inet.0</i> and <i>instance.inet.2</i>.</li> </ul>	<b>detail</b>
<b>Import policy</b>	( <b>instance</b> keyword only) Policy that <b>route export</b> uses to construct the import-export matrix. Not displayed if the instance type is <b>vrf</b> .	<b>detail</b>
<b>Instance</b>	( <b>instance</b> keyword only) Name of the routing instance.	<b>detail</b>
<b>Type</b>	( <b>instance</b> keyword only) Type of routing instance: <b>forwarding</b> , <b>non-forwarding</b> , or <b>vrf</b> .	<b>detail</b>

## Sample Output

### show route export

```

user@host> show route export
Table           Export      Routes
inet.0          N           0
black.inet.0    Y           3
red.inet.0      Y           4

```

### show route export detail

```

user@host> show route export detail
inet.0                      Routes:      0
black.inet.0                Routes:      3
  Import: [ inet.0 ]
red.inet.0                  Routes:      4
  Import: [ inet.0 ]

```

### show route export instance detail

```

user@host> show route export instance detail
Instance: master             Type: forwarding
  Flags: <config auto-policy> Options: <unicast multicast>
  Import policy: [ (ospf-master-from-red || isis-master-from-black) ]
Instance: black              Type: non-forwarding
Instance: red                Type: non-forwarding

```



## show route extensive

<b>Syntax</b>	show route extensive <destination-prefix> <logical-system (all   logical-system-name)>
<b>Syntax (EX Series Switches)</b>	show route extensive <destination-prefix>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display extensive information about the active entries in the routing tables.
<b>Options</b>	<p><b>none</b>—Display all active entries in the routing table.</p> <p><b>destination-prefix</b>—(Optional) Display active entries for the specified address or range of addresses.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route extensive on page 2519</a> <a href="#">show route extensive (Access Route) on page 2525</a> <a href="#">show route extensive (Route Reflector) on page 2525</a> <a href="#">show route extensive (FRR and LFA) on page 2525</a> <a href="#">show route extensive (FRR and LFA) on page 2526</a>
<b>Output Fields</b>	<p><a href="#">Table 193 on page 2513</a> describes the output fields for the <b>show route extensive</b> command. Output fields are listed in the approximate order in which they appear.</p>

**Table 193: show route extensive Output Fields**

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table (for example, inet.0).
<i>number destinations</i>	Number of destinations for which there are routes in the routing table.
<i>number routes</i>	Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> <li><b>active</b> (routes that are active).</li> <li><b>holddown</b> (routes that are in the pending state before being declared inactive).</li> <li><b>hidden</b> (routes that are not used because of a routing policy).</li> </ul>



Table 193: show route extensive Output Fields (*continued*)

Field Name	Field Description
<b>route-destination</b> (entry, announced)	<p>Route destination (for example: 10.0.0.1/24). The <b>entry</b> value is the number of route for this destination, and the <b>announced</b> value is the number of routes being announced for this destination. Sometimes the route destination is presented in another format, such as:</p> <ul style="list-style-type: none"> <li>• <b>MPLS-label</b> (for example, 80001).</li> <li>• <b>interface-name</b> (for example, ge-1/0/2).</li> <li>• <b>neighbor-address:control-word-status:encapsulation type:vc-id:source</b> (Layer 2 circuit only; for example, 10.1.1.195:NoCtrlWord:1:1:Local/96). <ul style="list-style-type: none"> <li>• <b>neighbor-address</b>—Address of the neighbor.</li> <li>• <b>control-word-status</b>—Whether the use of the control word has been negotiated for this virtual circuit: <b>NoCtrlWord</b> or <b>CtrlWord</b>.</li> <li>• <b>encapsulation type</b>—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport.</li> <li>• <b>vc-id</b>—Virtual circuit identifier.</li> <li>• <b>source</b>—Source of the advertisement: <b>Local</b> or <b>Remote</b>.</li> </ul> </li> </ul>
<b>TSI</b>	Protocol header information.
<b>label stacking</b>	<p>(Next-to-the-last-hop routing device for MPLS only) Depth of the MPLS label stack, where the label-popping operation is needed to remove one or more labels from the top of the stack. A pair of routes is displayed, because the pop operation is performed only when the stack depth is two or more labels.</p> <ul style="list-style-type: none"> <li>• <b>S=0 route</b> indicates that a packet with an incoming label stack depth of two or more exits this router with one fewer label (the label-popping operation is performed).</li> <li>• If there is no <b>S=</b> information, the route is a normal MPLS route, which has a stack depth of 1 (the label-popping operation is not performed).</li> </ul>
<b>[protocol, preference]</b>	<p>Protocol from which the route was learned and the preference value for the route.</p> <ul style="list-style-type: none"> <li>• <b>+</b>—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>-</b>—A hyphen indicates the last active route.</li> <li>• <b>*</b>—An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul> <p>In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value.</p>
<b>Level</b>	<p>(IS-IS only). In IS-IS, a single autonomous system (AS) can be divided into smaller groups called areas. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring Level 1 and Level 2 intermediate systems. Level 1 systems route within an area. When the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs.</p>
<b>Route Distinguisher</b>	IP subnet augmented with a 64-bit prefix.



Table 193: show route extensive Output Fields (*continued*)

Field Name	Field Description
<b>Next-hop type</b>	Type of next hop. For a description of possible values for this field, see the Output Field table in the <a href="#">show route detail</a> command.
<b>Next-hop reference count</b>	Number of references made to the next hop.
<b>Flood nexthop branches exceed maximum message</b>	Indicates that the number of flood next-hop branches exceeded the system limit of 32 branches, and only a subset of the flood next-hop branches were installed in the kernel.
<b>Source</b>	IP address of the route source.
<b>Next hop</b>	Network layer address of the directly reachable neighboring system.
<b>via</b>	<p>Interface used to reach the next hop. If there is more than one interface available to the next hop, the name of the interface that is actually used is followed by the word <b>Selected</b>. This field can also contain the following information:</p> <ul style="list-style-type: none"> <li>• <b>Weight</b>—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.</li> <li>• <b>Balance</b>—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.</li> </ul>
<b>Label-switched-path <i>lsp-path-name</i></b>	Name of the LSP used to reach the next hop.
<b>Label operation</b>	MPLS label and operation occurring at this routing device. The operation can be <b>pop</b> (where a label is removed from the top of the stack), <b>push</b> (where another label is added to the label stack), or <b>swap</b> (where a label is replaced by another label).
<b>Offset</b>	Whether the metric has been increased or decreased by an offset value.
<b>Interface</b>	(Local only) Local interface name.
<b>Protocol next hop</b>	Network layer address of the remote routing device that advertised the prefix. This address is used to recursively derive a forwarding next hop.
<b><i>label-operation</i></b>	MPLS label and operation occurring at this routing device. The operation can be <b>pop</b> (where a label is removed from the top of the stack), <b>push</b> (where another label is added to the label stack), or <b>swap</b> (where a label is replaced by another label).
<b>Indirect next hops</b>	When present, a list of nodes that are used to resolve the path to the next-hop destination, in the order that they are resolved.
<b>State</b>	State of the route (a route can be in more than one state). See the Output Field table in the <a href="#">show route detail</a> command.



Table 193: show route extensive Output Fields (*continued*)

Field Name	Field Description
<b>Session ID</b>	The BFD session ID number that represents the protection using MPLS fast reroute (FRR) and loop-free alternate (LFA).
<b>Inactive reason</b>	<p>If the route is inactive, the reason for its current state is indicated. Typical reasons include:</p> <ul style="list-style-type: none"> <li>• <b>Active preferred</b>—Currently active route was selected over this route.</li> <li>• <b>Always compare MED</b>—Path with a lower multiple exit discriminator (MED) is available.</li> <li>• <b>AS path</b>—Shorter AS path is available.</li> <li>• <b>Cisco Non-deterministic MED selection</b>—Cisco nondeterministic MED is enabled and a path with a lower MED is available.</li> <li>• <b>Cluster list length</b>—Path with a shorter cluster list length is available.</li> <li>• <b>Forwarding use only</b>—Path is only available for forwarding purposes.</li> <li>• <b>IGP metric</b>—Path through the next hop with a lower IGP metric is available.</li> <li>• <b>IGP metric type</b>—Path with a lower OSPF link-state advertisement type is available.</li> <li>• <b>Interior &gt; Exterior &gt; Exterior via Interior</b>—Direct, static, IGP, or EBGP path is available.</li> <li>• <b>Local preference</b>—Path with a higher local preference value is available.</li> <li>• <b>Next hop address</b>—Path with a lower metric next hop is available.</li> <li>• <b>No difference</b>—Path from a neighbor with a lower IP address is available.</li> <li>• <b>Not Best in its group</b>—Occurs when multiple peers of the same external AS advertise the same prefix and are grouped together in the selection process. When this reason is displayed, an additional reason is provided (typically one of the other reasons listed).</li> <li>• <b>Number of gateways</b>—Path with a higher number of next hops is available.</li> <li>• <b>Origin</b>—Path with a lower origin code is available.</li> <li>• <b>OSPF version</b>—Path does not support the indicated OSPF version.</li> <li>• <b>RIB preference</b>—Route from a higher-numbered routing table is available.</li> <li>• <b>Route distinguisher</b>—64-bit prefix added to IP subnets to make them unique.</li> <li>• <b>Route metric or MED comparison</b>—Route with a lower metric or MED is available.</li> <li>• <b>Route preference</b>—Route with a lower preference value is available.</li> <li>• <b>Router ID</b>—Path through a neighbor with a lower ID is available.</li> <li>• <b>Unusable path</b>—Path is not usable because of one of the following conditions: the route is damped, the route is rejected by an import policy, or the route is unresolved.</li> <li>• <b>Update source</b>—Last tiebreaker is the lowest IP address value.</li> </ul>
<b>Local AS</b>	Autonomous system (AS) number of the local routing device.
<b>Age</b>	How long the route has been known.
<b>AIGP</b>	Accumulated interior gateway protocol (AIGP) BGP attribute.
<b>Metric</b>	Cost value of the indicated route. For routes within an AS, the cost is determined by IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.
<b>MED-plus-IGP</b>	Metric value for BGP path selection to which the IGP cost to the next-hop destination has been added.



Table 193: show route extensive Output Fields (*continued*)

Field Name	Field Description
TTL-Action	<p>For MPLS LSPs, state of the TTL propagation attribute. Can be enabled or disabled for all RSVP-signaled and LDP-signaled LSPs or for specific VRF routing instances.</p> <p>For sample output, see <a href="#">show route table</a>.</p>
Task	Name of the protocol that has added the route.
Announcement bits	List of protocols that announce this route. <b>n-Resolve inet</b> indicates that the route is used for route resolution for next hops found in the routing table. <b>n</b> is an index used by Juniper Networks customer support only.
AS path	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• <b>I</b>—IGP.</li> <li>• <b>E</b>—EGP.</li> <li>• <b>Recorded</b>—The AS path is recorded by the sample process (sampled).</li> <li>• <b>?</b>—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li>• <b>[ ]</b>—Brackets enclose the local AS number associated with the AS path if more than one AS number is configured on the routing device, or if AS path prepending is configured.</li> <li>• <b>{ }</b>—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li>• <b>( )</b>—Parentheses enclose a confederation.</li> <li>• <b>( [ ] )</b>—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>
AS path: I <Originator>	(For route reflected output only) Originator ID attribute set by the route reflector.
VC Label	MPLS label assigned to the Layer 2 circuit virtual connection.
MTU	Maximum transmission unit (MTU) of the Layer 2 circuit.
VLAN ID	VLAN identifier of the Layer 2 circuit.
Cluster list	(For route reflected output only) Cluster ID sent by the route reflector.
Originator ID	(For route reflected output only) Address of router that originally sent the route to the route reflector.
Prefixes bound to route	Forwarding equivalent class (FEC) bound to this route. Applicable only to routes installed by LDP.
Communities	Community path attribute for the route. See the Output Field table in the <a href="#">show route detail</a> command for all possible values for this field.



Table 193: show route extensive Output Fields (*continued*)

Field Name	Field Description
<b>Layer2-info: encaps</b>	Layer 2 encapsulation (for example, VPLS).
<b>control flags</b>	Control flags: <b>none</b> or Site Down.
<b>mtu</b>	Maximum transmission unit (MTU) information.
<b>Label-Base, range</b>	First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device.
<b>status vector</b>	Layer 2 VPN and VPLS network layer reachability information (NLRI).
<b>Localpref</b>	Local preference value included in the route.
<b>Router ID</b>	BGP router ID as advertised by the neighbor in the open message.
<b>Primary Routing Table</b>	In a routing table group, the name of the primary routing table in which the route resides.
<b>Secondary Tables</b>	In a routing table group, the name of one or more secondary tables in which the route resides.
<b>Originating RIB</b>	Name of the routing table whose active route was used to determine the forwarding next-hop entry in the resolution database. For example, in the case of inet.0 resolving through inet.0 and inet.3, this field indicates which routing table, inet.0 or inet.3, provided the best path for a particular prefix.
<b>Node path count</b>	Number of nodes in the path.
<b>Forwarding nexthops</b>	Number of forwarding next hops. The forwarding next hop is the network layer address of the directly reachable neighboring system (if applicable) and the interface used to reach it.



## Sample Output

show route extensive

```

user@host> show route extensive
inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.10.0.0/16 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 29
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 1:34:06
    Task: RT
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I

10.31.1.0/30 (2 entries, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 2
    Next hop: via so-0/3/0.0, selected
    State: <Active Int>
    Local AS: 69
    Age: 1:32:40
    Task: IF
    Announcement bits (1): 3-Resolve tree 2
    AS path: I
  OSPF Preference: 10
    Next-hop reference count: 1
    Next hop: via so-0/3/0.0, selected
    State: <Int>
    Inactive reason: Route Preference
    Local AS: 69
    Age: 1:32:40 Metric: 1
    Area: 0.0.0.0
    Task: OSPF
    AS path: I

10.31.1.1/32 (1 entry, 1 announced)
  *Local Preference: 0
    Next hop type: Local
    Next-hop reference count: 7
    Interface: so-0/3/0.0
    State: <Active NoReadvrt Int>
    Local AS: 69
    Age: 1:32:43
    Task: IF
    Announcement bits (1): 3-Resolve tree 2
    AS path: I

...

10.31.2.0/30 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.31.2.0/30 -> {10.31.1.6}
  *OSPF Preference: 10
    Next-hop reference count: 9
    Next hop: via so-0/3/0.0
    Next hop: 10.31.1.6 via ge-3/1/0.0, selected

```



```
State: <Active Int>
Local AS: 69
Age: 1:32:19 Metric: 2
Area: 0.0.0.0
Task: OSPF
Announcement bits (2): 0-KRT 3-Resolve tree 2
AS path: I

...

224.0.0.2/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 224.0.0.2/32 -> {}
    *PIM Preference: 0
        Next-hop reference count: 18
        State: <Active NoReadvrt Int>
        Local AS: 69
        Age: 1:34:08
        Task: PIM Recv
        Announcement bits (2): 0-KRT 3-Resolve tree 2
        AS path: I

...

224.0.0.22/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 224.0.0.22/32 -> {}
    *IGMP Preference: 0
        Next-hop reference count: 18
        State: <Active NoReadvrt Int>
        Local AS: 69
        Age: 1:34:06
        Task: IGMP
        Announcement bits (2): 0-KRT 3-Resolve tree 2
        AS path: I

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

10.255.70.103/32 (1 entry, 1 announced)
State: <FlashAll>
    *RSVP Preference: 7
        Next-hop reference count: 6
        Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
        Label-switched-path green-r1-r3
        Label operation: Push 100096
        State: <Active Int>
        Local AS: 69
        Age: 1:28:12 Metric: 2
        Task: RSVP
        Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
        AS path: I

10.255.71.238/32 (1 entry, 1 announced)
State: <FlashAll>
    *RSVP Preference: 7
        Next-hop reference count: 6
        Next hop: via so-0/3/0.0 weight 0x1, selected
        Label-switched-path green-r1-r2
        State: <Active Int>
        Local AS: 69
        Age: 1:28:12 Metric: 1
```



```

Task: RSVP
Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
AS path: I

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

...

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

47.0005.80ff.f800.0000.0108.0001.0102.5507.1052/152 (1 entry, 0 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via lo0.0, selected
    State: <Active Int>
    Local AS: 69
    Age: 1:34:07
    Task: IF
    AS path: I

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

0 (1 entry, 1 announced)
TSI:
KRT in-kernel 0 /36 -> {}
  *MPLS Preference: 0
    Next hop type: Receive
    Next-hop reference count: 6
    State: <Active Int>
    Local AS: 69
    Age: 1:34:08 Metric: 1
    Task: MPLS
    Announcement bits (1): 0-KRT
    AS path: I

...

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
299776 (1 entry, 1 announced)
TSI:
KRT in-kernel 299776 /52 -> {Flood}
  *RSVP Preference: 7
    Next hop type: Flood
    Next-hop reference count: 130
    Flood nexthop branches exceed maximum
    Address: 0x8ea65d0

...

800010 (1 entry, 1 announced)

TSI:
KRT in-kernel 800010 /36 -> {vt-3/2/0.32769}
  *VPLS Preference: 7
    Next-hop reference count: 2
    Next hop: via vt-3/2/0.32769, selected
    Label operation: Pop
    State: <Active Int>
    Age: 1:31:53
    Task: Common L2 VC
    Announcement bits (1): 0-KRT

```



```

AS path: I

vt-3/2/0.32769 (1 entry, 1 announced)
TSI:
KRT in-kerne1 vt-3/2/0.32769.0      /16 -> {indirect(1048574)}
    *VPLS   Preference: 7
        Next-hop reference count: 2
        Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
        Label-switched-path green-r1-r3
        Label operation: Push 800012, Push 100096(top)
        Protocol next hop: 10.255.70.103
        Push 800012
        Indirect next hop: 87272e4 1048574
        State: <Active Int>
        Age: 1:31:53      Metric2: 2
        Task: Common L2 VC
        Announcement bits (2): 0-KRT 1-Common L2 VC
        AS path: I
        Communities: target:11111:1 Layer2-info: encaps:VPLS,
        control flags:, mtu: 0
        Indirect next hops: 1
            Protocol next hop: 10.255.70.103 Metric: 2
            Push 800012
            Indirect next hop: 87272e4 1048574
            Indirect path forwarding next hops: 1
                Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1
            10.255.70.103/32 Originating RIB: inet.3
                Metric: 2                      Node path count: 1
                Forwarding nexthops: 1
                Nexthop: 10.31.1.6 via ge-3/1/0.0

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

abcd::10:255:71:52/128 (1 entry, 0 announced)
    *Direct Preference: 0
        Next hop type: Interface
        Next-hop reference count: 1
        Next hop: via lo0.0, selected
        State: <Active Int>
        Local AS: 69
        Age: 1:34:07
        Task: IF
        AS path: I

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
    *Direct Preference: 0
        Next hop type: Interface
        Next-hop reference count: 1
        Next hop: via lo0.0, selected
        State: <Active NoReadvrt Int>
        Local AS: 69
        Age: 1:34:07
        Task: IF
        AS path: I

ff02::2/128 (1 entry, 1 announced)
TSI:
KRT in-kerne1 ff02::2/128 -> {}
    *PIM   Preference: 0
        Next-hop reference count: 18
        State: <Active NoReadvrt Int>

```



```

        Local AS:    69
        Age: 1:34:08
        Task: PIM Recv6
        Announcement bits (1): 0-KRT
        AS path: I

ff02::d/128 (1 entry, 1 announced)
TSI:
KRT in-kernel ff02::d/128 -> {}
    *PIM    Preference: 0
            Next-hop reference count: 18
            State: <Active NoReadvrt Int>
            Local AS:    69
            Age: 1:34:08
            Task: PIM Recv6
            Announcement bits (1): 0-KRT
            AS path: I

ff02::16/128 (1 entry, 1 announced)
TSI:
KRT in-kernel ff02::16/128 -> {}
    *MLD    Preference: 0
            Next-hop reference count: 18
            State: <Active NoReadvrt Int>
            Local AS:    69
            Age: 1:34:06
            Task: MLD
            Announcement bits (1): 0-KRT
            AS path: I

private.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
    *Direct Preference: 0
            Next hop type: Interface
            Next-hop reference count: 1
            Next hop: via lo0.16385, selected
            State: <Active NoReadvrt Int>
            Age: 1:34:07
            Task: IF
            AS path: I

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)

10.255.70.103:1:3:1/96 (1 entry, 1 announced)
    *BGP    Preference: 170/-101
            Route Distinguisher: 10.255.70.103:1
            Next-hop reference count: 7
            Source: 10.255.70.103
            Protocol next hop: 10.255.70.103
            Indirect next hop: 2 no-forward
            State: <Secondary Active Int Ext>
            Local AS:    69 Peer AS:    69
            Age: 1:28:12   Metric2: 1
            Task: BGP_69.10.255.70.103+179
            Announcement bits (1): 0-green-l2vpn
            AS path: I
            Communities: target:11111:1 Layer2-info: encaps:VPLS,
            control flags:, mtu: 0
            Label-base: 800008, range: 8
            Localpref: 100

```



```

Router ID: 10.255.70.103
Primary Routing Table bgp.l2vpn.0

10.255.71.52:1:1:1/96 (1 entry, 1 announced)
TSI:
Page 0 idx 0 Type 1 val 8699540
    *L2VPN Preference: 170/-1
        Next-hop reference count: 5
        Protocol next hop: 10.255.71.52
        Indirect next hop: 0 -
        State: <Active Int Ext>
        Age: 1:34:03 Metric2: 1
        Task: green-l2vpn
        Announcement bits (1): 1-BGP.0.0.0+179
        AS path: I
        Communities: Layer2-info: encaps:VPLS, control flags:Site-Down,
        mtu: 0
        Label-base: 800016, range: 8, status-vector: 0x9F

10.255.71.52:1:5:1/96 (1 entry, 1 announced)
TSI:
Page 0 idx 0 Type 1 val 8699528
    *L2VPN Preference: 170/-101
        Next-hop reference count: 5
        Protocol next hop: 10.255.71.52
        Indirect next hop: 0 -
        State: <Active Int Ext>
        Age: 1:34:03 Metric2: 1
        Task: green-l2vpn
        Announcement bits (1): 1-BGP.0.0.0+179
        AS path: I
        Communities: Layer2-info: encaps:VPLS, control flags:, mtu: 0
        Label-base: 800008, range: 8, status-vector: 0x9F

...

l2circuit.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
TSI:

10.245.255.63:CtrlWord:4:3:Local/96 (1 entry, 1 announced)
    *L2CKT Preference: 7
        Next hop: via so-1/1/2.0 weight 1, selected
        Label-switched-path my-lsp
        Label operation: Push 100000[0]
        Protocol next hop: 10.245.255.63 Indirect next hop: 86af000 296
        State: <Active Int>
        Local AS: 99
        Age: 10:21
        Task: l2 circuit
        Announcement bits (1): 0-LDP
        AS path: I
        VC Label 100000, MTU 1500, VLAN ID 512

55.0.0.0/24 (1 entry, 1 announced)
TSI:
KRT queued (pending) add
    55.0.0.0/24 -> {Push 300112}
        *BGP Preference: 170/-101
            Next hop type: Router

```



```

Address: 0x925c208
Next-hop reference count: 2
Source: 10.0.0.9
Next hop: 10.0.0.9 via ge-1/2/0.15, selected
Label operation: Push 300112
Label TTL action: prop-ttl
State: <Active Ext>
Local AS: 7019 Peer AS: 13979
Age: 1w0d 23:06:56
AIGP: 25
Task: BGP_13979.10.0.0.9+56732
Announcement bits (1): 0-KRT
AS path: 13979 7018 I
Accepted
Route Label: 300112
Localpref: 100
Router ID: 10.9.9.1

```

#### show route extensive (Access Route)

```

user@host> show route 13.160.0.102 extensive
inet.0: 39256 destinations, 39258 routes (39255 active, 0 holddown, 1 hidden)
13.160.0.102/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 13.160.0.102/32 -> {13.160.0.2}
OSPF area : 0.0.0.0, LSA ID : 13.160.0.102, LSA type : Extern
  *Access Preference: 13
    Next-hop reference count: 78472
    Next hop: 13.160.0.2 via fe-0/0/0.0, selected
    State: <Active Int>
  Age: 12
    Task: RPD Unix Domain Server./var/run/rpd_serv.local
    Announcement bits (2): 0-KRT 1-OSPFv2
    AS path: I

```

#### show route extensive (Route Reflector)

```

user@host> show route extensive
1.0.0.0/8 (1 entry, 1 announced)

TSI:
KRT in-kernel 1.0.0.0/8 -> {indirect(40)}
  *BGP Preference: 170/-101
    Source: 192.168.4.214
    Protocol next hop: 207.17.136.192 Indirect next hop: 84ac908 40
    State: <Active Int Ext>
    Local AS: 10458 Peer AS: 10458
    Age: 3:09 Metric: 0 Metric2: 0
    Task: BGP_10458.192.168.4.214+1033
    Announcement bits (2): 0-KRT 4-Resolve inet.0
    AS path: 3944 7777 I <Originator>
    Cluster list: 1.1.1.1
    Originator ID: 10.255.245.88
    Communities: 7777:7777
    Localpref: 100
    Router ID: 4.4.4.4
    Indirect next hops: 1
      Protocol next hop: 207.17.136.192 Metric: 0
      Indirect next hop: 84ac908 40
      Indirect path forwarding next hops: 0
      Next hop type: Discard

```

```

user@host> show route 20:31:2:0 extensive

```



**show route extensive  
(FRR and LFA)**

```
inet.0: 46 destinations, 49 routes (45 active, 0 holddown, 1 hidden)
20.31.2.0/24 (2 entries, 1 announced)
  State: FlashAll
TSI:
KRT in-kernel 20.31.2.0/24 -> {Push 299776, Push 299792}
  *RSVP Preference: 7/1
    Next hop type: Router, Next hop index: 1048574
    Address: 0xbbbc010
    Next-hop reference count: 5
    Next hop: 10.31.1.2 via ge-2/1/8.0 weight 0x1, selected
    Label-switched-path europa-d-to-europa-e
    Label operation: Push 299776
    Label TTL action: prop-ttl
    Session Id: 0x201
    Next hop: 10.31.2.2 via ge-2/1/4.0 weight 0x4001
    Label-switched-path europa-d-to-europa-e
    Label operation: Push 299792
    Label TTL action: prop-ttl
    Session Id: 0x202
    State: Active Int
    Local AS: 100
    Age: 5:31 Metric: 2
    Task: RSVP
    Announcement bits (1): 0-KRT
    AS path: I
  OSPF Preference: 10
    Next hop type: Router, Next hop index: 615
    Address: 0xb9d78c4
    Next-hop reference count: 7
    Next hop: 10.31.1.2 via ge-2/1/8.0, selected
    Session Id: 0x201
    State: Int
    Inactive reason: Route Preference
    Local AS: 100
    Age: 5:35 Metric: 3
    Area: 0.0.0.0
    Task: OSPF
    AS path: I
```

**show route extensive  
(FRR and LFA)**

```
user@host> show route 20.31.2.0 extensive
inet.0: 46 destinations, 49 routes (45 active, 0 holddown, 1 hidden)
20.31.2.0/24 (2 entries, 1 announced)
  State: FlashAll
TSI:
KRT in-kernel 20.31.2.0/24 -> {Push 299776, Push 299792}
  *RSVP Preference: 7/1
    Next hop type: Router, Next hop index: 1048574
    Address: 0xbbbc010
    Next-hop reference count: 5
    Next hop: 10.31.1.2 via ge-2/1/8.0 weight 0x1, selected
    Label-switched-path europa-d-to-europa-e
    Label operation: Push 299776
    Label TTL action: prop-ttl
    Session Id: 0x201
    Next hop: 10.31.2.2 via ge-2/1/4.0 weight 0x4001
    Label-switched-path europa-d-to-europa-e
    Label operation: Push 299792
    Label TTL action: prop-ttl
    Session Id: 0x202
    State: Active Int
    Local AS: 100
```



```
Age: 5:31 Metric: 2
Task: RSVP
Announcement bits (1): 0-KRT
AS path: I
OSPF Preference: 10
Next hop type: Router, Next hop index: 615
Address: 0xb9d78c4
Next-hop reference count: 7
Next hop: 10.31.1.2 via ge-2/1/8.0, selected
Session Id: 0x201
State: Int
Inactive reason: Route Preference
Local AS: 100
Age: 5:35 Metric: 3
Area: 0.0.0.0
Task: OSPF
AS path: I
```



## show route flow validation

<b>Syntax</b>	show route flow validation <brief   detail> <ip-prefix> <table table-name> <logical-system (all   logical-system-name)>
<b>Syntax (EX Series Switches)</b>	show route flow validation <brief   detail> <ip-prefix> <table table-name>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display flow route information.
<b>Options</b>	<p><b>none</b>—Display flow route information.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.</p> <p><b>ip-prefix</b>—(Optional) IP address for the flow route.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>table table-name</b>—(Optional) Display flow route information for all routing tables whose name begins with this string (for example, <b>inet.0</b> and <b>inet6.0</b> are both displayed when you run the <b>show route flow validation inet</b> command).</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route flow validation on page 2529</a>
<b>Output Fields</b>	<a href="#">Table 194 on page 2528</a> lists the output fields for the <b>show route flow validation</b> command. Output fields are listed in the approximate order in which they appear.

**Table 194: show route flow validation Output Fields**

Field Name	Field Description	Level of Output
<i>routing-table-name</i>	Name of the routing table (for example, <b>inet.0</b> ).	All levels
<i>prefix</i>	Route address.	All levels
<b>Active unicast route</b>	Active route in the routing table.	All levels
<b>Dependent flow destinations</b>	Number of flows for which there are routes in the routing table.	All levels



Table 194: show route flow validation Output Fields (*continued*)

Field Name	Field Description	Level of Output
Origin	Source of the route flow.	All levels
Neighbor AS	Autonomous system identifier of the neighbor.	All levels
Flow destination	Number of entries and number of destinations that match the route flow.	All levels
Unicast best match	Destination that is the best match for the route flow.	All levels
Flags	Information about the route flow.	All levels

## Sample Output

**show route flow  
validation**

```
user@host> show route flow validation
inet.0:
10.0.5.0/24Active unicast route
Dependent flow destinations: 1
Origin: 192.168.224.218, Neighbor AS: 65001
Flow destination (3 entries, 1 match origin)
Unicast best match: 10.0.5.0/24
Flags: SubtreeApex Consistent
```



## show route forwarding-table

---

<b>Syntax</b>	<pre>show route forwarding-table &lt;detail   extensive   summary&gt; &lt;all&gt; &lt;ccc interface-name&gt; &lt;destination destination-prefix&gt; &lt;family family   matching matching&gt; &lt;interface-name interface-name&gt; &lt;label name&gt; &lt;matching matching&gt; &lt;multicast&gt; &lt;table (default   logical-system-name/routing-instance-name   routing-instance-name)&gt; &lt;vlan (all   vlan-name)&gt; &lt;vpn vpn&gt;</pre>
<b>Syntax (MX Series Routers)</b>	<pre>show route forwarding-table &lt;detail   extensive   summary&gt; &lt;all&gt; &lt;bridge-domain (all   domain-name)&gt; &lt;ccc interface-name&gt; &lt;destination destination-prefix&gt; &lt;family family   matching matching&gt; &lt;interface-name interface-name&gt; &lt;label name&gt; &lt;learning-vlan-id learning-vlan-id&gt; &lt;matching matching&gt; &lt;multicast&gt; &lt;table (default   logical-system-name/routing-instance-name   routing-instance-name)&gt; &lt;vlan (all   vlan-name)&gt; &lt;vpn vpn&gt;</pre>
<b>Syntax (Routing Matrix)</b>	<pre>show route forwarding-table &lt;detail   extensive   summary&gt; &lt;all&gt; &lt;ccc interface-name&gt; &lt;destination destination-prefix&gt; &lt;family family   matching matching&gt; &lt;interface-name interface-name&gt; &lt;matching matching&gt; &lt;label name&gt; &lt;lcc number&gt; &lt;multicast&gt; &lt;table routing-instance-name&gt; &lt;vpn vpn&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Option <b>bridge-domain</b> introduced in Junos OS Release 7.5</p> <p>Option <b>learning-vlan-id</b> introduced in Junos OS Release 8.4</p> <p>Options <b>all</b> and <b>vlan</b> introduced in Junos OS Release 9.6.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p>



**Description** Display the Routing Engine's forwarding table, including the network-layer prefixes and their next hops. This command is used to help verify that the routing protocol process has relayed the correction information to the forwarding table. The Routing Engine constructs and maintains one or more routing tables. From the routing tables, the Routing Engine derives a table of active routes, called the forwarding table.



**NOTE:** The Routing Engine copies the forwarding table to the Packet Forwarding Engine, the part of the router that is responsible for forwarding packets. To display the entries in the Packet Forwarding Engine's forwarding table, use the **show pfe route** command.

**Options** **none**—Display the routes in the forwarding tables. By default, the **show route forwarding-table** command does not display information about private, or internal, forwarding tables.

**detail | extensive | summary**—(Optional) Display the specified level of output.

**all**—(Optional) Display routing table entries for all forwarding tables, including private, or internal, tables.

**bridge-domain (all | bridge-domain-name)**—(MX Series routers only) (Optional) Display route entries for all bridge domains or the specified bridge domain.

**ccc interface-name**—(Optional) Display route entries for the specified circuit cross-connect interface.

**destination destination-prefix**—(Optional) Destination prefix.

**family family**—(Optional) Display routing table entries for the specified family: **fibre-channel**, **fmembers**, **inet**, **inet6**, **iso**, **mpls**, **tnp**, **unix**, **vpls**, or **vlan-classification**.

**interface-name interface-name**—(Optional) Display routing table entries for the specified interface.

**label name**—(Optional) Display route entries for the specified label.

**lcc number**—(Routing Matrix only) (Optional) On a routing matrix composed of a TX Matrix Plus router and T640 routers configured in the routing matrix, display information for the specified T640 router (or line-card chassis) connected to the TX Matrix router. On a routing matrix composed of the TX Matrix Plus router and T1600 routers configured in the routing matrix, display information for the specified T1600 router (or line-card chassis) connected to the TX Matrix Plus router. Replace **number** with a value from 0 through 3.

**learning-vlan-id learning-vlan-id**—(MX Series routers only) (Optional) Display learned information for all VLANs or for the specified VLAN.

**matching matching**—(Optional) Display routing table entries matching the specified prefix or prefix length.



**multicast**—(Optional) Display routing table entries for multicast routes.

**table (default | *logical-system-name/routing-instance-name* |**

***routing-instance-name*)**—(Optional) Display route entries for all the routing tables in the main routing instance or for the specified routing instance. If your device supports logical systems, you can also display route entries for the specified logical system and routing instance. To view the routing instances on your device, use the [show route instance](#) command.

**vlan (all | *vlan-name*)**—(Optional) Display information for all VLANs or for the specified VLAN.

**vpn *vpn***—(Optional) Display routing table entries for a specified VPN.

**Required Privilege Level**

view

**List of Sample Output**

[show route forwarding-table on page 2535](#)  
[show route forwarding-table detail on page 2535](#)  
[show route forwarding-table destination extensive \(Weights and Balances\) on page 2536](#)  
[show route forwarding-table extensive on page 2537](#)  
[show route forwarding-table extensive \(RPF\) on page 2538](#)  
[show route forwarding-table family mpls on page 2540](#)  
[show route forwarding-table family vpls on page 2540](#)  
[show route forwarding-table family vpls extensive on page 2540](#)  
[show route forwarding-table table default on page 2541](#)  
[show route forwarding-table table](#)  
[logical-system-name/routing-instance-name on page 2542](#)  
[show route forwarding-table vpn on page 2543](#)

**Output Fields**

Table 195 on page 2532 lists the output fields for the **show route forwarding-table** command. Output fields are listed in the approximate order in which they appear. Field names might be abbreviated (as shown in parentheses) when no level of output is specified, or when the **detail** keyword is used instead of the **extensive** keyword.

**Table 195: show route forwarding-table Output Fields**

Field Name	Field Description	Level of Output
Logical system	Name of the logical system. This field is displayed if you specify the <b>table <i>logical-system-name/routing-instance-name</i></b> option on a device that is configured for and supports logical systems.	All levels
Routing table	Name of the routing table (for example, inet, inet6, mpls).	All levels
Address family	Address family (for example, IP, IPv6, ISO, MPLS, and VPLS).	All levels
Destination	Destination of the route.	<b>detail extensive</b>



Table 195: show route forwarding-table Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Route Type (Type)</b>	How the route was placed into the forwarding table. When the <b>detail</b> keyword is used, the route type might be abbreviated (as shown in parentheses): <ul style="list-style-type: none"> <li>• <b>cloned (clon)</b>—(TCP or multicast only) Cloned route.</li> <li>• <b>destination (dest)</b>—Remote addresses directly reachable through an interface.</li> <li>• <b>destination down (iddn)</b>—Destination route for which the interface is unreachable.</li> <li>• <b>interface cloned (ifcl)</b>—Cloned route for which the interface is unreachable.</li> <li>• <b>route down (ifdn)</b>—Interface route for which the interface is unreachable.</li> <li>• <b>ignore (ignr)</b>—Ignore this route.</li> <li>• <b>interface (intf)</b>—Installed as a result of configuring an interface.</li> <li>• <b>permanent (perm)</b>—Routes installed by the kernel when the routing table is initialized.</li> <li>• <b>user</b>—Routes installed by the routing protocol process or as a result of the configuration.</li> </ul>	All levels
<b>Route Reference (RtRef)</b>	Number of routes to reference.	<b>detail extensive</b>
<b>Flags</b>	Route type flags: <ul style="list-style-type: none"> <li>• <b>none</b>—No flags are enabled.</li> <li>• <b>accounting</b>—Route has accounting enabled.</li> <li>• <b>cached</b>—Cache route.</li> <li>• <b>incoming-iface interface-number</b>—Check against incoming interface.</li> <li>• <b>prefix load balance</b>—Load balancing is enabled for this prefix.</li> <li>• <b>rt nh decoupled</b>—Route has been decoupled from the next hop to the destination.</li> <li>• <b>sent to PFE</b>—Route has been sent to the Packet Forwarding Engine.</li> <li>• <b>static</b>—Static route.</li> </ul>	<b>extensive</b>
<b>Next hop</b>	IP address of the next hop to the destination.	<b>detail extensive</b>



Table 195: show route forwarding-table Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Next hop Type (Type)</b>	<p>Next-hop type. When the <b>detail</b> keyword is used, the next-hop type might be abbreviated (as indicated in parentheses):</p> <ul style="list-style-type: none"> <li>• <b>broadcast (bcst)</b>—Broadcast.</li> <li>• <b>deny</b>—Deny.</li> <li>• <b>discard (dscd)</b>—Discard.</li> <li>• <b>hold</b>—Next hop is waiting to be resolved into a unicast or multicast type.</li> <li>• <b>indexed (idxd)</b>—Indexed next hop.</li> <li>• <b>indirect (indr)</b>—Indirect next hop.</li> <li>• <b>local (locl)</b>—Local address on an interface.</li> <li>• <b>routed multicast (mcrst)</b>—Regular multicast next hop.</li> <li>• <b>multicast (mcst)</b>—Wire multicast next hop (limited to the LAN).</li> <li>• <b>multicast discard (mdsc)</b>—Multicast discard.</li> <li>• <b>multicast group (mgrp)</b>—Multicast group member.</li> <li>• <b>receive (rcv)</b>—Receive.</li> <li>• <b>reject (rjct)</b>—Discard. An ICMP unreachable message was sent.</li> <li>• <b>resolve (rslv)</b>—Resolving the next hop.</li> <li>• <b>unicast (ucst)</b>—Unicast.</li> <li>• <b>unilist (ulst)</b>—List of unicast next hops. A packet sent to this next hop goes to any next hop in the list.</li> </ul>	<b>detail extensive</b>
<b>Index</b>	Software index of the next hop that is used to route the traffic for a given prefix.	<b>detail extensive none</b>
<b>Route interface-index</b>	Logical interface index from which the route is learned. For example, for interface routes, this is the logical interface index of the route itself. For static routes, this field is zero. For routes learned through routing protocols, this is the logical interface index from which the route is learned.	<b>extensive</b>
<b>Reference (NhRef)</b>	Number of routes that refer to this next hop.	<b>detail extensive none</b>
<b>Next-hop interface (Netif)</b>	Interface used to reach the next hop.	<b>detail extensive none</b>
<b>Weight</b>	Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible (see the <b>Balance</b> field description).	<b>extensive</b>
<b>Balance</b>	Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a router is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.	<b>extensive</b>
<b>RPF interface</b>	List of interfaces from which the prefix can be accepted. Reverse path forwarding (RPF) information is displayed only when <b>rpf-check</b> is configured on the interface.	<b>extensive</b>



## Sample Output

```
show route
forwarding-table
```

```
user@host> show route forwarding-table
```

```
Routing table: default.inet
```

```
Internet:
```

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	46	4	
0.0.0.0/32	perm	0		dscd	44	1	
1.1.1.0/24	ifdn	0		rslv	608	1	ge-2/0/1.0
1.1.1.0/32	iddn	0	1.1.1.0	recv	606	1	ge-2/0/1.0
1.1.1.1/32	user	0		rjct	46	4	
1.1.1.1/32	intf	0	1.1.1.1	loc1	607	2	
1.1.1.1/32	iddn	0	1.1.1.1	loc1	607	2	
1.1.1.255/32	iddn	0	ff:ff:ff:ff:ff:ff	bcst	605	1	ge-2/0/1.0
10.0.0.0/24	intf	0		rslv	616	1	ge-2/0/0.0
10.0.0.0/32	dest	0	10.0.0.0	recv	614	1	ge-2/0/0.0
10.0.0.1/32	intf	0	10.0.0.1	loc1	615	2	
10.0.0.1/32	dest	0	10.0.0.1	loc1	615	2	
10.0.0.255/32	dest	0	10.0.0.255	bcst	613	1	ge-2/0/0.0
10.1.1.0/24	ifdn	0		rslv	612	1	ge-2/0/1.0
10.1.1.0/32	iddn	0	10.1.1.0	recv	610	1	ge-2/0/1.0
10.1.1.1/32	user	0		rjct	46	4	
10.1.1.1/32	intf	0	10.1.1.1	loc1	611	2	
10.1.1.1/32	iddn	0	10.1.1.1	loc1	611	2	
10.1.1.255/32	iddn	0	ff:ff:ff:ff:ff:ff	bcst	609	1	ge-2/0/1.0
10.209.0.0/16	user	0	10.209.63.254	ucst	419	20	fxp0.0
10.209.0.0/16	user	1	0:12:1e:ca:98:0	ucst	419	20	fxp0.0
10.209.0.0/18	intf	0		rslv	418	1	fxp0.0
10.209.0.0/32	dest	0	10.209.0.0	recv	416	1	fxp0.0
10.209.2.131/32	intf	0	10.209.2.131	loc1	417	2	
10.209.2.131/32	dest	0	10.209.2.131	loc1	417	2	
10.209.17.55/32	dest	0	0:30:48:5b:78:d2	ucst	435	1	fxp0.0
10.209.63.42/32	dest	0	0:23:7d:58:92:ca	ucst	434	1	fxp0.0
10.209.63.254/32	dest	0	0:12:1e:ca:98:0	ucst	419	20	fxp0.0
10.209.63.255/32	dest	0	10.209.63.255	bcst	415	1	fxp0.0
10.227.0.0/16	user	0	10.209.63.254	ucst	419	20	fxp0.0

```
...
```

```
Routing table: iso
```

```
ISO:
```

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	27	1	
47.0005.80ff.f800.0000.0108.0003.0102.5524.5220.00	intf	0	loc1 28			1	

```
Routing table: inet6
```

```
Internet6:
```

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	6	1	
ff00::/8	perm	0		mdsc	4	1	
ff02::1/128	perm	0	ff02::1	mcst	3	1	

```
Routing table: ccc
```

```
MPLS:
```

Interface.Label	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	16	1	
100004(top)fe-0/0/1.0							



**show route  
forwarding-table detail**

user@host> show route forwarding-table detail

Routing table: inet

Internet:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	user	2	0:90:69:8e:b1:1b	ucst	132	4	fxp0.0
default	perm	0		rjct	14	1	
10.1.1.0/24	intf	0	ff.3.0.21	ucst	322	1	so-5/3/0.0
10.1.1.0/32	dest	0	10.1.1.0	recv	324	1	so-5/3/0.0
10.1.1.1/32	intf	0	10.1.1.1	loc1	321	1	
10.1.1.255/32	dest	0	10.1.1.255	bcst	323	1	so-5/3/0.0
10.21.21.0/24	intf	0	ff.3.0.21	ucst	326	1	so-5/3/0.0
10.21.21.0/32	dest	0	10.21.21.0	recv	328	1	so-5/3/0.0
10.21.21.1/32	intf	0	10.21.21.1	loc1	325	1	
10.21.21.255/32	dest	0	10.21.21.255	bcst	327	1	so-5/3/0.0
127.0.0.1/32	intf	0	127.0.0.1	loc1	320	1	
172.17.28.19/32	clon	1	192.168.4.254	ucst	132	4	fxp0.0
172.17.28.44/32	clon	1	192.168.4.254	ucst	132	4	fxp0.0

...

Routing table: private1\_\_inet

Internet:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	46	1	
10.0.0.0/8	intf	0		rslv	136	1	fxp1.0
10.0.0.0/32	dest	0	10.0.0.0	recv	134	1	fxp1.0
10.0.0.4/32	intf	0	10.0.0.4	loc1	135	2	
10.0.0.4/32	dest	0	10.0.0.4	loc1	135	2	

...

Routing table: iso

ISO:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	38	1	

Routing table: inet6

Internet6:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	22	1	
ff00::/8	perm	0		mdsc	21	1	
ff02::1/128	perm	0	ff02::1	mcst	17	1	

...

Routing table: mpls

MPLS:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	28	1	

**show route  
forwarding-table  
destination extensive**

user@host> show route forwarding-table destination 3.4.2.1 extensive

Routing table: inet [Index 0]

Internet:



**(Weights and Balances)**

```

Destination: 3.4.2.1/32
Route type: user
Route reference: 0
Flags: sent to PFE
Next-hop type: unicast
Nexthop: 4.4.4.4
Next-hop type: unicast
Next-hop interface: so-1/1/0.0
Nexthop: 145.12.1.2
Next-hop type: unicast
Next-hop interface: so-0/1/2.0
Route interface-index: 0
Index: 262143 Reference: 1
Index: 335 Reference: 2
Weight: 22 Balance: 3
Index: 337 Reference: 2
Weight: 33 Balance: 33

```

**show route forwarding-table extensive**

```

user@host> show route forwarding-table extensive
Routing table: inet [Index 0]
Internet:

Destination: default
Route type: user
Route reference: 2
Flags: sent to PFE
Nexthop: 0:90:69:8e:b1:1b
Next-hop type: unicast
Next-hop interface: fxp0.0
Route interface-index: 0
Index: 132 Reference: 4

Destination: default
Route type: permanent
Route reference: 0
Flags: none
Next-hop type: reject
Route interface-index: 0
Index: 14 Reference: 1

Destination: 127.0.0.1/32
Route type: interface
Route reference: 0
Flags: sent to PFE
Nexthop: 127.0.0.1
Next-hop type: local
Route interface-index: 0
Index: 320 Reference: 1

...

Routing table: private1__inet [Index 1]
Internet:

Destination: default
Route type: permanent
Route reference: 0
Flags: sent to PFE
Next-hop type: reject
Route interface-index: 0
Index: 46 Reference: 1

Destination: 10.0.0.0/8
Route type: interface
Route reference: 0
Flags: sent to PFE
Next-hop type: resolve
Next-hop interface: fxp1.0
Route interface-index: 3
Index: 136 Reference: 1

...

Routing table: iso [Index 0]
ISO:

Destination: default

```



```

Route type: permanent
Route reference: 0
Flags: sent to PFE
Next-hop type: reject
Route interface-index: 0
Index: 38      Reference: 1

Routing table: inet6 [Index 0]
Internet6:

Destination: default
Route type: permanent
Route reference: 0
Flags: sent to PFE
Next-hop type: reject
Route interface-index: 0
Index: 22      Reference: 1

Destination: ff00::/8
Route type: permanent
Route reference: 0
Flags: sent to PFE
Next-hop type: multicast discard
Route interface-index: 0
Index: 21      Reference: 1

...

Routing table: private1__inet6 [Index 1]
Internet6:

Destination: default
Route type: permanent
Route reference: 0
Flags: sent to PFE
Next-hop type: reject
Route interface-index: 0
Index: 54      Reference: 1

Destination: fe80::2a0:a5ff:fe3d:375/128
Route type: interface
Route reference: 0
Flags: sent to PFE
Nexthop: fe80::2a0:a5ff:fe3d:375
Next-hop type: local
Route interface-index: 0
Index: 75      Reference: 1

...

```

### show route forwarding-table extensive (RPF)

The next example is based on the following configuration, which enables an RPF check on all routes that are learned from this interface, including the interface route:

```

so-1/1/0 {
  unit 0 {
    family inet {
      rpf-check;
      address 15.95.1.2/30;
    }
  }
}

```

```
user@host> show route forwarding-table extensive
```

```

Routing table: inet [Index 0]
Internet:
...
...
Destination: 15.95.1.3/32
Route type: destination
Route reference: 0
Route interface-index: 67

```



Flags: sent to PFE		
Nexthop: 15.95.1.3		
Next-hop type: broadcast	Index: 328	Reference: 1
Next-hop interface: so-1/1/0.0		
RPF interface: so-1/1/0.0		



### show route forwarding-table family mpls

```

user@host> show route forwarding-table family mpls
Routing table: mpls
MPLS:
Destination      Type RtRef Next hop      Type Index NhRef Netif
default          perm  0          Type Index NhRef Netif
0                user  0          recv  18    3
1                user  0          recv  18    3
2                user  0          recv  18    3
100000           user  0 10.31.1.6      swap 100001 fe-1/1/0.0
800002           user  0          Pop          vt-0/3/0.32770

vt-0/3/0.32770 (VPLS)
                  user  0          indr  351    4
                  Push 800000, Push 100002(top)

so-0/0/0.0

```

### show route forwarding-table family vpls

```

user@host> show route forwarding-table family vpls
Routing table: green.vpls
VPLS:
Destination      Type RtRef Next hop      Type Index NhRef Netif
default          dynm  0          flood 353    1
default          perm  0          rjct  298    1
fe-0/1/0.0       dynm  0          flood 355    1
00:90:69:0c:20:1f/48 <<<<<Remote CE
                  dynm  0          indr  351    4
                  Push 800000, Push 100002(top)

so-0/0/0.0
00:90:69:85:b0:1f/48 <<<<<Local CE
                  dynm  0          ucst  354    2 fe-0/1/0.0

```

### show route forwarding-table family vpls extensive

```

user@host> show route forwarding-table family vpls extensive
Routing table: green.vpls [Index 2]
VPLS:

Destination: default
Route type: dynamic
Route reference: 0
Flags: sent to PFE
Next-hop type: flood
Next-hop type: unicast
Next-hop interface: fe-0/1/3.0
Next-hop type: unicast
Next-hop interface: fe-0/1/2.0
Route interface-index: 72
Index: 289 Reference: 1
Index: 291 Reference: 3
Index: 290 Reference: 3

Destination: default
Route type: permanent
Route reference: 0
Flags: none
Next-hop type: discard
Route interface-index: 0
Index: 341 Reference: 1

Destination: fe-0/1/2.0
Route type: dynamic
Route reference: 0
Flags: sent to PFE
Next-hop type: flood
Next-hop type: indirect
Next-hop type: Push 800016
Route interface-index: 69
Index: 293 Reference: 1
Index: 363 Reference: 4

```



```

Next-hop interface: at-1/0/1.0
Next-hop type: indirect          Index: 301      Reference: 5
Next hop: 10.31.3.2
Next-hop type: Push 800000
Next-hop interface: fe-0/1/1.0
Next-hop type: unicast          Index: 291      Reference: 3
Next-hop interface: fe-0/1/3.0

Destination: fe-0/1/3.0
Route type: dynamic
Route reference: 0               Route interface-index: 70
Flags: sent to PFE
Next-hop type: flood            Index: 292      Reference: 1
Next-hop type: indirect         Index: 363      Reference: 4
Next-hop type: Push 800016
Next-hop interface: at-1/0/1.0
Next-hop type: indirect         Index: 301      Reference: 5
Next hop: 10.31.3.2
Next-hop type: Push 800000
Next-hop interface: fe-0/1/1.0
Next-hop type: unicast          Index: 290      Reference: 3
Next-hop interface: fe-0/1/2.0

Destination: 10:00:00:01:01:01/48
Route type: dynamic
Route reference: 0               Route interface-index: 70
Flags: sent to PFE, prefix load balance
Next-hop type: unicast          Index: 291      Reference: 3
Next-hop interface: fe-0/1/3.0
Route used as destination:
  Packet count:      6640   Byte count:      675786
Route used as source
  Packet count:      6894   Byte count:      696424

Destination: 10:00:00:01:01:01:04/48
Route type: dynamic
Route reference: 0               Route interface-index: 69
Flags: sent to PFE, prefix load balance
Next-hop type: unicast          Index: 290      Reference: 3
Next-hop interface: fe-0/1/2.0
Route used as destination:
  Packet count:      96     Byte count:      8079
Route used as source:
  Packet count:      296    Byte count:      24955

Destination: 10:00:00:01:03:05/48
Route type: dynamic
Route reference: 0               Route interface-index: 74
Flags: sent to PFE, prefix load balance
Next-hop type: indirect         Index: 301      Reference: 5
Next hop: 10.31.3.2
Next-hop type: Push 800000
Next-hop interface: fe-0/1/1.0

```

### show route forwarding-table table default

```

user@host> show route forwarding-table table default
Routing table: default.inet

```

```

Internet:
Destination      Type RtRef Next hop      Type Index NhRef Netif
default          perm  0
0.0.0.0/32       perm  0
10.0.60.0/30     user  0 10.0.60.13  ucst  713  5 fe-0/1/3.0

```



```

10.0.60.12/30    intf    0          rslv    688    1 fe-0/1/3.0
10.0.60.12/32    dest    0 10.0.60.12    recv    686    1 fe-0/1/3.0
10.0.60.13/32    dest    0 0:5:85:8b:bc:22    ucst    713    5 fe-0/1/3.0
10.0.60.14/32    intf    0 10.0.60.14    locl    687    2
10.0.60.14/32    dest    0 10.0.60.14    locl    687    2
10.0.60.15/32    dest    0 10.0.60.15    bcst    685    1 fe-0/1/3.0
10.0.67.12/30    user    0 10.0.60.13    ucst    713    5 fe-0/1/3.0
10.0.80.0/30     ifdn    0 ff.3.0.21     ucst    676    1 so-0/0/1.0
10.0.80.0/32     dest    0 10.0.80.0     recv    678    1 so-0/0/1.0
10.0.80.2/32     user    0          rjct     36    2
10.0.80.2/32     intf    0 10.0.80.2     locl    675    1
10.0.80.3/32     dest    0 10.0.80.3     bcst    677    1 so-0/0/1.0
10.0.90.12/30    intf    0          rslv    684    1 fe-0/1/0.0
10.0.90.12/32    dest    0 10.0.90.12    recv    682    1 fe-0/1/0.0
10.0.90.14/32    intf    0 10.0.90.14    locl    683    2
10.0.90.14/32    dest    0 10.0.90.14    locl    683    2
10.0.90.15/32    dest    0 10.0.90.15    bcst    681    1 fe-0/1/0.0
10.5.0.0/16      user    0 192.168.187.126    ucst    324    15 fxp0.0
10.10.0.0/16     user    0 192.168.187.126    ucst    324    15 fxp0.0
10.13.10.0/23    user    0 192.168.187.126    ucst    324    15 fxp0.0
10.84.0.0/16     user    0 192.168.187.126    ucst    324    15 fxp0.0
10.150.0.0/16    user    0 192.168.187.126    ucst    324    15 fxp0.0
10.157.64.0/19   user    0 192.168.187.126    ucst    324    15 fxp0.0
10.209.0.0/16    user    0 192.168.187.126    ucst    324    15 fxp0.0

```

...

Routing table: default.iso

ISO:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	60	1	

Routing table: default.inet6

Internet6:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	44	1	
::/128	perm	0		dscd	42	1	
ff00::/8	perm	0		mdsc	43	1	
ff02::1/128	perm	0	ff02::1	mcst	39	1	

Routing table: default.mpls

MPLS:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		dscd	50	1	

**show route**  
**forwarding-table table**  
**logical-system-name**

user@host> show route forwarding-table table R4/vpn-red

Logical system: R4

Routing table: vpn-red.inet

Internet:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	563	1	
0.0.0.0/32	perm	0		dscd	561	2	
1.0.0.1/32	user	0		dscd	561	2	
2.0.2.0/24	intf	0		rslv	771	1	ge-1/2/0.3
2.0.2.0/32	dest	0	2.0.2.0	recv	769	1	ge-1/2/0.3
2.0.2.1/32	intf	0	2.0.2.1	locl	770	2	
2.0.2.1/32	dest	0	2.0.2.1	locl	770	2	
2.0.2.2/32	dest	0	0.4.80.3.0.1b.c0.d5.e4.bd.0.1b.c0.d5.e4.bc.8.0	ucst	789	1	ge-1/2/0.3
2.0.2.255/32	dest	0	2.0.2.255	bcst	768	1	ge-1/2/0.3
224.0.0.0/4	perm	1		mdsc	562	1	



```

224.0.0.1/32      perm      0 224.0.0.1      mcst    558      1
255.255.255.255/32 perm      0                bcst    559      1

```

Logical system: R4

Routing table: vpn-red.iso

ISO:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	608	1	

Logical system: R4

Routing table: vpn-red.inet6

Internet6:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	708	1	
::/128	perm	0		dscd	706	1	
ff00::/8	perm	0		mdsc	707	1	
ff02::1/128	perm	0	ff02::1	mcst	704	1	

Logical system: R4

Routing table: vpn-red.mpls

MPLS:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		dscd	638		

**show route  
forwarding-table vpn**

user@host> **show route forwarding-table vpn VPN-A**

Routing table:: VPN-A.inet

Internet:

Destination	Type	RtRef	Nexthop	Type	Index	NhRef	Netif
default	perm	0		rjct	4	4	
10.39.10.20/30	intf	0	ff.3.0.21	ucst	40	1	
so-0/0/0.0							
10.39.10.21/32	intf	0	10.39.10.21	loc1	36	1	
10.255.14.172/32	user	0		ucst	69	2	
so-0/0/0.0							
10.255.14.175/32	user	0		indr	81	3	
				Push	100004	Push	
100004(top) so-1/0/0.0							
224.0.0.0/4	perm	2		mdsc	5	3	
224.0.0.1/32	perm	0	224.0.0.1	mcst	1	8	
224.0.0.5/32	user	1	224.0.0.5	mcst	1	8	
255.255.255.255/32	perm	0		bcst	2	3	



## show route inactive-path

---

<b>Syntax</b>	show route inactive-path <brief   detail   extensive   terse> <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	show route inactive-path <brief   detail   extensive   terse>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display routes for destinations that have no active route. An inactive route is a route that was not selected as the best path.
<b>Options</b>	<b>none</b> —Display all inactive routes.  <b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b> .  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route inactive-path on page 2545</a> <a href="#">show route inactive-path detail on page 2545</a> <a href="#">show route inactive-path extensive on page 2546</a> <a href="#">show route inactive-path terse on page 2546</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.



## Sample Output

show route  
inactive-path

```
user@host> show route inactive-path

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.12.100.12/30      [OSPF/10] 03:57:28, metric 1
> via so-0/3/0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.0/8          [Direct/0] 04:39:56
> via fxp1.0

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.12.80.0/30       [BGP/170] 04:38:17, localpref 100
                    AS path: 100 I
> to 10.12.80.1 via ge-6/3/2.0

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

bgp.l3vpn.0: 3 destinations, 3 routes (0 active, 0 holddown, 3 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

show route  
inactive-path detail

```
user@host> show route inactive-path detail

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete

10.12.100.12/30 (2 entries, 1 announced)
    OSPF    Preference: 10
            Next-hop reference count: 1
            Next hop: via so-0/3/0.0, selected
            State: <Int>
            Inactive reason: Route Preference
            Local AS:      1
            Age: 3:58:24   Metric: 1
            Area: 0.0.0.0
            Task: OSPF
            AS path: I

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

10.0.0.0/8 (2 entries, 0 announced)
```



```

Direct Preference: 0
  Next hop type: Interface
  Next-hop reference count: 1
  Next hop: via fxp1.0, selected
  State: <NotBest Int>
  Inactive reason: No difference
  Age: 4:40:52
  Task: IF
  AS path: I

```

```

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete

```

```

10.12.80.0/30 (2 entries, 1 announced)
  BGP Preference: 170/-101
  Next-hop reference count: 6
  Source: 10.12.80.1
  Next hop: 10.12.80.1 via ge-6/3/2.0, selected
  State: <Ext>
  Inactive reason: Route Preference
  Peer AS: 100
  Age: 4:39:13
  Task: BGP_100.10.12.80.1+179
  AS path: 100 I
  Localpref: 100
  Router ID: 10.0.0.0

```

#### show route inactive-path extensive

The output for the **show route inactive-path extensive** command is identical to that of the **show route inactive-path detail** command. For sample output, see [show route inactive-path detail on page 2545](#).

#### show route inactive-path terse

```
user@host> show route inactive-path terse
```

```

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
  10.12.100.12/30   0  10           1           >so-0/3/0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
  10.0.0.0/8        D   0           0           >fxp1.0

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
  10.12.80.0/30     B 170          100           >10.12.80.1    100 I

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

```



bgp.l3vpn.0: 3 destinations, 3 routes (0 active, 0 holddown, 3 hidden)  
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)  
Restart Complete

private1\_\_\_.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)



## show route inactive-prefix

---

<b>Syntax</b>	show route inactive-prefix <brief   detail   extensive   terse> <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	show route inactive-prefix <brief   detail   extensive   terse>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display inactive route destinations in each routing table.
<b>Options</b>	<b>none</b> —Display all inactive route destination.  <b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route inactive-prefix on page 2549</a> <a href="#">show route inactive-prefix detail on page 2549</a> <a href="#">show route inactive-prefix extensive on page 2549</a> <a href="#">show route inactive-prefix terse on page 2549</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.



## Sample Output

**show route  
inactive-prefix**

```
user@host> show route inactive-prefix

inet.0: 14 destinations, 14 routes (13 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

127.0.0.1/32          [Direct/0] 00:04:54
> via lo0.0
```

**show route  
inactive-prefix detail**

```
user@host> show route inactive-prefix detail

inet.0: 14 destinations, 14 routes (13 active, 0 holddown, 1 hidden)
127.0.0.1/32 (1 entry, 0 announced)
  Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via lo0.0, selected
    State: <Hidden Martian Int>
    Age: 4:51
    Task: IF
    AS path: I00:04:54
    > via lo0.0
```

**show route  
inactive-prefix  
extensive**

The output for the **show route inactive-prefix extensive** command is identical to that of the **show route inactive-path detail** command. For sample output, see [show route inactive-prefix detail on page 2549](#).

**show route  
inactive-prefix terse**

```
user@host> show route inactive-prefix terse

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination          P Prf  Metric 1  Metric 2  Next hop          AS path
127.0.0.1/32          D   0                >lo0.0
```



## show route instance

<b>Syntax</b>	show route instance <brief   detail   summary> <instance-name> <logical-system (all   <i>logical-system-name</i> )> <operational>
<b>Syntax (EX Series Switches and QFX Series)</b>	show route instance <brief   detail   summary> <instance-name> <operational>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Display routing instance information.
<b>Options</b>	<p><b>none</b>—(Same as <b>brief</b>) Display standard information about all routing instances.</p> <p><b>brief   detail   summary</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b>. (These options are not available with the <b>operational</b> keyword.)</p> <p><b>instance-name</b>—(Optional) Display information for all routing instances whose name begins with this string (for example, <b>cust1</b>, <b>cust11</b>, and <b>cust111</b> are all displayed when you run the <b>show route instance cust1</b> command).</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>operational</b>—(Optional) Display operational routing instances.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route instance on page 2552</a> <a href="#">show route instance detail (Graceful Restart Complete) on page 2552</a> <a href="#">show route instance detail (Graceful Restart Incomplete) on page 2554</a> <a href="#">show route instance detail (VPLS Routing Instance) on page 2555</a> <a href="#">show route instance operational on page 2556</a> <a href="#">show route instance summary on page 2556</a>
<b>Output Fields</b>	<a href="#">Table 101 on page 1366</a> lists the output fields for the <b>show route instance</b> command. Output fields are listed in the approximate order in which they appear.

Table 196: show route instance Output Fields

Field Name	Field Description	Level of Output
Instance or <i>instance-name</i>	Name of the routing instance.	All levels



Table 196: show route instance Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Operational Routing Instances</b>	( <b>operational</b> keyword only) Names of all operational routing instances.	—
<b>Type</b>	Type of routing instance: <b>forwarding</b> , <b>l2vpn</b> , <b>no-forwarding</b> , <b>vpls</b> , <b>virtual-router</b> , or <b>vrf</b> .	All levels
<b>State</b>	State of the routing instance: <b>active</b> or <b>inactive</b> .	<b>brief detail none</b>
<b>Interfaces</b>	Name of interfaces belonging to this routing instance.	<b>brief detail none</b>
<b>Restart State</b>	Status of graceful restart for this instance: <b>Pending</b> or <b>Complete</b> .	<b>detail</b>
<b>Path selection timeout</b>	Maximum amount of time, in seconds, remaining until graceful restart is declared complete. The default is <b>300</b> .	<b>detail</b>
<b>Tables</b>	Tables (and number of routes) associated with this routing instance.	<b>brief detail none</b>
<b>Route-distinguisher</b>	Unique route distinguisher associated with this routing instance.	<b>detail</b>
<b>Vrf-import</b>	VPN routing and forwarding instance import policy name.	<b>detail</b>
<b>Vrf-export</b>	VPN routing and forwarding instance export policy name.	<b>detail</b>
<b>Vrf-import-target</b>	VPN routing and forwarding instance import target community name.	<b>detail</b>
<b>Vrf-export-target</b>	VPN routing and forwarding instance export target community name.	<b>detail</b>
<b>Fast-reroute-priority</b>	Fast reroute priority setting for a VPLS routing instance: <b>high</b> , <b>medium</b> , or <b>low</b> . The default is <b>low</b> .	<b>detail</b>
<b>Restart State</b>	Restart state: <ul style="list-style-type: none"> <li>• <b>Pending:protocol-name</b>—List of protocols that have not yet completed graceful restart for this routing table.</li> <li>• <b>Complete</b>—All protocols have restarted for this routing table.</li> </ul>	<b>detail</b>
<b>Primary rib</b>	Primary table for this routing instance.	<b>brief none summary</b>
<b>Active/holddown/hidden</b>	Number of active, hold-down, and hidden routes.	All levels



## Sample Output

### show route instance

```

user@host> show route instance
Instance              Type
Primary RIB
master                forwarding
inet.0                16/0/1
iso.0                 1/0/0
mpls.0                0/0/0
inet6.0               2/0/0
l2circuit.0          0/0/0
__juniper_private1__ forwarding
__juniper_private1__.inet.0 12/0/0
__juniper_private1__.inet6.0 1/0/0

```

### show route instance detail (Graceful Restart Complete)

```

user@host> show route instance detail
master:
Router ID: 10.255.14.176
Type: forwarding      State: Active
Restart State: Complete Path selection timeout: 300
Tables:
inet.0                : 17 routes (15 active, 0 holddown, 1 hidden)
Restart Complete
inet.3                : 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
iso.0                 : 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete
mpls.0               : 19 routes (19 active, 0 holddown, 0 hidden)
Restart Complete
bgp.l3vpn.0          : 10 routes (10 active, 0 holddown, 0 hidden)
Restart Complete
inet6.0              : 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
bgp.l2vpn.0          : 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete
BGP-INET:
Router ID: 10.69.103.1
Type: vrf              State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
t3-0/0/0.103
Route-distinguisher: 10.255.14.176:103
Vrf-import: [ BGP-INET-import ]
Vrf-export: [ BGP-INET-export ]
Tables:
BGP-INET.inet.0       : 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
BGP-L:
Router ID: 10.69.104.1
Type: vrf              State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
t3-0/0/0.104
Route-distinguisher: 10.255.14.176:104
Vrf-import: [ BGP-L-import ]
Vrf-export: [ BGP-L-export ]
Tables:
BGP-L.inet.0          : 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

```



```

BGP-L.mpls.0          : 3 routes (3 active, 0 holddown, 0 hidden)
Restart Complete
L2VPN:
Router ID: 0.0.0.0
Type: l2vpn           State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
  t3-0/0/0.512
Route-distinguisher: 10.255.14.176:512
Vrf-import: [ L2VPN-import ]
Vrf-export: [ L2VPN-export ]
Tables:
  L2VPN.l2vpn.0       : 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
LDP:
Router ID: 10.69.105.1
Type: vrf             State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
  t3-0/0/0.105
Route-distinguisher: 10.255.14.176:105
Vrf-import: [ LDP-import ]
Vrf-export: [ LDP-export ]
Tables:
  LDP.inet.0          : 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
OSPF:
Router ID: 10.69.101.1
Type: vrf             State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
  t3-0/0/0.101
Route-distinguisher: 10.255.14.176:101
Vrf-import: [ OSPF-import ]
Vrf-export: [ OSPF-export ]
Vrf-import-target: [ target:11111
Tables:
  OSPF.inet.0         : 8 routes (7 active, 0 holddown, 0 hidden)
Restart Complete
RIP:
Router ID: 10.69.102.1
Type: vrf             State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
  t3-0/0/0.102
Route-distinguisher: 10.255.14.176:102
Vrf-import: [ RIP-import ]
Vrf-export: [ RIP-export ]
Tables:
  RIP.inet.0          : 6 routes (6 active, 0 holddown, 0 hidden)
Restart Complete
STATIC:
Router ID: 10.69.100.1
Type: vrf             State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
  t3-0/0/0.100
Route-distinguisher: 10.255.14.176:100
Vrf-import: [ STATIC-import ]
Vrf-export: [ STATIC-export ]
Tables:

```



```

STATIC.inet.0          : 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

```

### show route instance detail (Graceful Restart Incomplete)

```

user@host> show route instance detail
master:
Router ID: 10.255.14.176
Type: forwarding      State: Active
Restart State: Pending Path selection timeout: 300
Tables:
  inet.0              : 17 routes (15 active, 1 holddown, 1 hidden)
Restart Pending: OSPF LDP
  inet.3              : 2 routes (2 active, 0 holddown, 0 hidden)
Restart Pending: OSPF LDP
  iso.0               : 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete
  mpls.0              : 23 routes (23 active, 0 holddown, 0 hidden)
Restart Pending: LDP VPN
  bgp.l3vpn.0         : 10 routes (10 active, 0 holddown, 0 hidden)
Restart Pending: BGP VPN
  inet6.0             : 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
  bgp.l2vpn.0         : 1 routes (1 active, 0 holddown, 0 hidden)
Restart Pending: BGP VPN
BGP-INET:
Router ID: 10.69.103.1
Type: vrf              State: Active
Restart State: Pending Path selection timeout: 300
Interfaces:
  t3-0/0/0.103
Route-distinguisher: 10.255.14.176:103
Vrf-import: [ BGP-INET-import ]
Vrf-export: [ BGP-INET-export ]
Tables:
  BGP-INET.inet.0     : 6 routes (5 active, 0 holddown, 0 hidden)
Restart Pending: VPN
BGP-L:
Router ID: 10.69.104.1
Type: vrf              State: Active
Restart State: Pending Path selection timeout: 300
Interfaces:
  t3-0/0/0.104
Route-distinguisher: 10.255.14.176:104
Vrf-import: [ BGP-L-import ]
Vrf-export: [ BGP-L-export ]
Tables:
  BGP-L.inet.0        : 6 routes (5 active, 0 holddown, 0 hidden)
Restart Pending: VPN
  BGP-L.mpls.0        : 2 routes (2 active, 0 holddown, 0 hidden)
Restart Pending: VPN
L2VPN:
Router ID: 0.0.0.0
Type: l2vpn            State: Active
Restart State: Pending Path selection timeout: 300
Interfaces:
  t3-0/0/0.512
Route-distinguisher: 10.255.14.176:512
Vrf-import: [ L2VPN-import ]
Vrf-export: [ L2VPN-export ]
Tables:
  L2VPN.l2vpn.0       : 2 routes (2 active, 0 holddown, 0 hidden)
Restart Pending: VPN L2VPN

```



```

LDP:
  Router ID: 10.69.105.1
  Type: vrf                      State: Active
  Restart State: Pending Path selection timeout: 300
  Interfaces:
    t3-0/0/0.105
  Route-distinguisher: 10.255.14.176:105
  Vrf-import: [ LDP-import ]
  Vrf-export: [ LDP-export ]
  Tables:
    LDP.inet.0                  : 5 routes (4 active, 1 holddown, 0 hidden)
    Restart Pending: OSPF LDP VPN

OSPF:
  Router ID: 10.69.101.1
  Type: vrf                      State: Active
  Restart State: Pending Path selection timeout: 300
  Interfaces:
    t3-0/0/0.101
  Route-distinguisher: 10.255.14.176:101
  Vrf-import: [ OSPF-import ]
  Vrf-export: [ OSPF-export ]
  Tables:
    OSPF.inet.0                : 8 routes (7 active, 1 holddown, 0 hidden)
    Restart Pending: OSPF VPN

RIP:
  Router ID: 10.69.102.1
  Type: vrf                      State: Active
  Restart State: Pending Path selection timeout: 300
  Interfaces:
    t3-0/0/0.102
  Route-distinguisher: 10.255.14.176:102
  Vrf-import: [ RIP-import ]
  Vrf-export: [ RIP-export ]
  Tables:
    RIP.inet.0                 : 8 routes (6 active, 2 holddown, 0 hidden)
    Restart Pending: RIP VPN

STATIC:
  Router ID: 10.69.100.1
  Type: vrf                      State: Active
  Restart State: Pending Path selection timeout: 300
  Interfaces:
    t3-0/0/0.100
  Route-distinguisher: 10.255.14.176:100
  Vrf-import: [ STATIC-import ]
  Vrf-export: [ STATIC-export ]
  Tables:
    STATIC.inet.0              : 4 routes (4 active, 0 holddown, 0 hidden)
    Restart Pending: VPN

```

#### show route instance detail (VPLS Routing Instance)

```

user@host> show route instance detail test-vpls
test-vpls:
  Router ID: 0.0.0.0
  Type: vpls                      State: Active
  Interfaces:
    lsi.1048833
    lsi.1048832
    fe-0/1/0.513
  Route-distinguisher: 10.255.37.65:1
  Vrf-import: [ __vrf-import-test-vpls-internal__ ]
  Vrf-export: [ __vrf-export-test-vpls-internal__ ]
  Vrf-import-target: [ target:300:1 ]

```



```

Vrf-export-target: [ target:300:1 ]
Fast-reroute-priority: high
Tables:
    test-vpls.l2vpn.0          : 3 routes (3 active, 0 holddown, 0 hidden)

```

### show route instance operational

```

user@host> show route instance operational
Operational Routing Instances:

```

```

master
default

```

### show route instance summary

```

user@host> show route instance summary

```

Instance	Type	Primary rib	Active/holddown/hidden
master	forwarding	inet.0	15/0/1
		iso.0	1/0/0
		mpls.0	35/0/0
		l3vpn.0	0/0/0
		inet6.0	2/0/0
		l2vpn.0	0/0/0
		l2circuit.0	0/0/0
BGP-INET	vrf	BGP-INET.inet.0	5/0/0
		BGP-INET.iso.0	0/0/0
		BGP-INET.inet6.0	0/0/0
BGP-L	vrf	BGP-L.inet.0	5/0/0
		BGP-L.iso.0	0/0/0
		BGP-L.mpls.0	4/0/0
		BGP-L.inet6.0	0/0/0
L2VPN	l2vpn	L2VPN.inet.0	0/0/0
		L2VPN.iso.0	0/0/0
		L2VPN.inet6.0	0/0/0
		L2VPN.l2vpn.0	2/0/0
LDP	vrf	LDP.inet.0	4/0/0
		LDP.iso.0	0/0/0
		LDP.mpls.0	0/0/0
		LDP.inet6.0	0/0/0
		LDP.l2circuit.0	0/0/0
OSPF	vrf	OSPF.inet.0	7/0/0
		OSPF.iso.0	0/0/0
		OSPF.inet6.0	0/0/0
RIP	vrf	RIP.inet.0	6/0/0
		RIP.iso.0	0/0/0
		RIP.inet6.0	0/0/0
STATIC	vrf	STATIC.inet.0	4/0/0
		STATIC.iso.0	0/0/0
		STATIC.inet6.0	0/0/0



## show route label

---

<b>Syntax</b>	show route label <i>label</i> <brief   detail   extensive   terse> <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	show route label <i>label</i> <brief   detail   extensive   terse>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.5 for EX Series switches.
<b>Description</b>	Display the routes based on a specified Multiprotocol Label Switching (MPLS) label value.
<b>Options</b>	<p><i>label</i>—Value of the MPLS label.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route label on page 2558</a> <a href="#">show route label detail on page 2558</a> <a href="#">show route label extensive on page 2558</a> <a href="#">show route label terse on page 2558</a>
<b>Output Fields</b>	For information about output fields, see the output field table for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.



## Sample Output

### show route label

```
user@host> show route label 100016

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
100016          *[VPN/170] 03:25:41
                > to 10.12.80.1 via ge-6/3/2.0, Pop
```

### show route label detail

```
user@host> show route label 100016 detail

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
100016 (1 entry, 1 announced)
    *VPN      Preference: 170
              Next-hop reference count: 2
              Source: 10.12.80.1
              Next hop: 10.12.80.1 via ge-6/3/2.0, selected
              Label operation: Pop
              State: <Active Int Ext>
              Local AS:      1
              Age: 3:23:31
              Task: BGP.0.0.0.0+179
              Announcement bits (1): 0-KRT
              AS path: 100 I
              Ref Cnt: 2
```

### show route label extensive

The output for the show route label extensive command is identical to that of the **show route label detail** command. For sample output, see [show route label detail on page 2558](#).

### show route label terse

```
user@host> show route label 100016 terse

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
* 100016           V 170                >10.12.80.1
```



## show route label-switched-path

---

<b>Syntax</b>	show route label-switched-path <i>path-name</i> <brief   detail   extensive   terse> <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	show route label-switched-path <i>path-name</i> <brief   detail   extensive   terse>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.5 for EX Series switches.
<b>Description</b>	Display the routes used in an MPLS label-switched path (LSP).
<b>Options</b>	<b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output.  <b><i>path-name</i></b> —LSP tunnel name.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route label-switched-path on page 2560</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.



## Sample Output

**show route**  
**label-switched-path**

```
user@host> show route label-switched-path sf-to-ny
inet.0: 29 destinations, 29 routes (29 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1.1.1.1/32      [MPLS/7] 00:00:06, metric 0
> to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny
3.3.3.3/32      *[MPLS/7] 00:00:06, metric 0
> to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny

inet.3: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2.2.2.2/32      *[MPLS/7] 00:00:06, metric 0
> to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny
4.4.4.4/32      *[MPLS/7] 00:00:06, metric 0
to 111.222.1.9 via s0-0/0/0, label-switched-path abc
> to 111.222.1.9 via s0-0/0/0, label-switched-path xyz
to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny
111.222.1.9/32  [MPLS/7] 00:00:06, metric 0
> to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

mpls.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```



## show route martians

<b>Syntax</b>	show route martians <logical-system (all   <i>logical-system-name</i> )> <table <i>routing-table-name</i> >
<b>Syntax (EX Series Switches)</b>	show route martians <table <i>routing-table-name</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display the martian (invalid and ignored) entries associated with each routing table.
<b>Options</b>	<p><b>none</b>—Display standard information about route martians for all routing tables.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>table <i>routing-table-name</i></b>—(Optional) Display information about route martians for all routing tables whose name begins with this string (for example, <b>inet.0</b> and <b>inet6.0</b> are both displayed when you run the <b>show route martians table inet</b> command).</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Example: Configuring Martian Addresses</li> </ul>
<b>List of Sample Output</b>	<a href="#">show route martians on page 2562</a>
<b>Output Fields</b>	<a href="#">Table 197 on page 2561</a> lists the output fields for the <b>show route martians</b> command. Output fields are listed in the approximate order in which they appear

**Table 197: show route martians Output Fields**

Field Name	Field Description
<i>table-name</i>	Name of the route table in which the route martians reside.
<i>destination-prefix</i>	Route destination.
<i>match value</i>	Route match parameter.
<i>status</i>	Status of the route: <b>allowed</b> or <b>disallowed</b> .



## Sample Output

```
show route martians      user@host> show route martians

inet.0:
    0.0.0.0/0 exact -- allowed
    0.0.0.0/8 orlonger -- disallowed
    127.0.0.0/8 orlonger -- disallowed
    192.0.0.0/24 orlonger -- disallowed
    240.0.0.0/4 orlonger -- disallowed
    224.0.0.0/4 exact -- disallowed
    224.0.0.0/24 exact -- disallowed

inet.1:
    0.0.0.0/0 exact -- allowed
    0.0.0.0/8 orlonger -- disallowed
    127.0.0.0/8 orlonger -- disallowed
    192.0.0.0/24 orlonger -- disallowed
    240.0.0.0/4 orlonger -- disallowed

inet.2:
    0.0.0.0/0 exact -- allowed
    0.0.0.0/8 orlonger -- disallowed
    127.0.0.0/8 orlonger -- disallowed
    192.0.0.0/24 orlonger -- disallowed
    240.0.0.0/4 orlonger -- disallowed
    224.0.0.0/4 exact -- disallowed
    224.0.0.0/24 exact -- disallowed

inet.3:
    0.0.0.0/0 exact -- allowed
    0.0.0.0/8 orlonger -- disallowed
    127.0.0.0/8 orlonger -- disallowed
    192.0.0.0/24 orlonger -- disallowed
    240.0.0.0/4 orlonger -- disallowed
    224.0.0.0/4 exact -- disallowed
    224.0.0.0/24 exact -- disallowed
...

inet6.0:
    ::1/128 exact -- disallowed
    ff00::/8 exact -- disallowed
    ff02::/16 exact -- disallowed

inet6.1:
    ::1/128 exact -- disallowed

inet6.2:
    ::1/128 exact -- disallowed
    ff00::/8 exact -- disallowed
    ff02::/16 exact -- disallowed

inet6.3:
    ::1/128 exact -- disallowed
    ff00::/8 exact -- disallowed
    ff02::/16 exact -- disallowed
...
```



## show route next-hop

---

<b>Syntax</b>	<code>show route next-hop <i>next-hop</i></code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>
<b>Syntax (EX Series Switches)</b>	<code>show route next-hop <i>next-hop</i></code> <code>&lt;brief   detail   extensive   terse&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display the entries in the routing table that are being sent to the specified next-hop address.
<b>Options</b>	<b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. <b><i>next-hop</i></b> —Next-hop address.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route next-hop on page 2564</a> <a href="#">show route next-hop detail on page 2564</a> <a href="#">show route next-hop extensive on page 2566</a> <a href="#">show route next-hop terse on page 2568</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.



## Sample Output

### show route next-hop

```
user@host> show route next-hop 192.168.71.254

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.10.0.0/16      *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0
10.209.0.0/16    *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0
172.16.0.0/12    *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0
192.168.0.0/16   *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0
192.168.102.0/23 *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0
207.17.136.0/24  *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0
207.17.136.192/32 *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

### show route next-hop detail

```
user@host> show route next-hop 192.168.71.254 detail

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
Restart Complete
10.10.0.0/16 (1 entry, 1 announced)
    *Static Preference: 5
        Next-hop reference count: 36
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Local AS: 1
        Age: 6:27:41
        Task: RT
        Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
        AS path: I
10.209.0.0/16 (1 entry, 1 announced)
    *Static Preference: 5
        Next-hop reference count: 36
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
```



```
Local AS:      1
Age: 6:27:41
Task: RT
Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
AS path: I

172.16.0.0/12 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS:      1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

192.168.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS:      1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

192.168.102.0/23 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS:      1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

207.17.136.0/24 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS:      1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

207.17.136.192/32 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS:      1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I
```



```
private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

#### show route next-hop extensive

```
user@host> show route next-hop 192.168.71.254 extensive

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.10.0.0/16 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2:02:28
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

10.209.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.209.0.0/16 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2:02:28
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

172.16.0.0/12 (1 entry, 1 announced)
TSI:
KRT in-kernel 172.16.0.0/12 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2:02:28
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

192.168.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 192.168.0.0/16 -> {192.168.71.254}
```



```

*Static Preference: 5
  Next-hop reference count: 22
  Next hop: 192.168.71.254 via fxp0.0, selected
  State: <Active NoReadvrt Int Ext>
  Local AS: 69
  Age: 2:02:28
  Task: RT
  Announcement bits (1): 0-KRT
  AS path: I

192.168.102.0/23 (1 entry, 1 announced)
TSI:
KRT in-kernel 192.168.102.0/23 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2:02:28
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

207.17.136.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.0/24 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2:02:28
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

207.17.136.192/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.192/32 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2:02:28
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

green.l2vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

```



```
red.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

#### show route next-hop terse

```
user@host> show route next-hop 192.168.71.254 terse
```

```
inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
```

```
Restart Complete
```

```
+ = Active Route, - = Last Active, * = Both
```

A	Destination	P	Prf	Metric 1	Metric 2	Next hop	AS path
*	10.10.0.0/16	S	5			>192.168.71.254	
*	10.209.0.0/16	S	5			>192.168.71.254	
*	172.16.0.0/12	S	5			>192.168.71.254	
*	192.168.0.0/16	S	5			>192.168.71.254	
*	192.168.102.0/23	S	5			>192.168.71.254	
*	207.17.136.0/24	S	5			>192.168.71.254	
*	207.17.136.192/32	S	5			>192.168.71.254	

```
private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
```

```
red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)
```

```
Restart Complete
```

```
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

```
Restart Complete
```

```
mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
```

```
Restart Complete
```

```
inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
```

```
Restart Complete
```

```
private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```



## show route no-community

---

<b>Syntax</b>	show route no-community <brief   detail   extensive   terse> <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	show route no-community <brief   detail   extensive   terse>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display the route entries in each routing table that are not associated with any community.
<b>Options</b>	<p><b>none</b>—(Same as <b>brief</b>) Display the route entries in each routing table that are not associated with any community.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route no-community on page 2570</a> <a href="#">show route no-community detail on page 2570</a> <a href="#">show route no-community extensive on page 2570</a> <a href="#">show route no-community terse on page 2571</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.



## Sample Output

### show route no-community

```
user@host> show route no-community
inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.0.0/16      *[Static/5] 00:36:27
                  > to 192.168.71.254 via fxp0.0
10.209.0.0/16    *[Static/5] 00:36:27
                  > to 192.168.71.254 via fxp0.0
10.255.71.52/32  *[Direct/0] 00:36:27
                  > via lo0.0
10.255.71.63/32  *[OSPF/10] 00:04:39, metric 1
                  > to 35.1.1.2 via ge-3/1/0.0
10.255.71.64/32  *[OSPF/10] 00:00:08, metric 2
                  > to 35.1.1.2 via ge-3/1/0.0
10.255.71.240/32 *[OSPF/10] 00:05:04, metric 2
                  via so-0/1/2.0
                  > via so-0/3/2.0
10.255.71.241/32 *[OSPF/10] 00:05:14, metric 1
                  > via so-0/1/2.0
10.255.71.242/32 *[OSPF/10] 00:05:19, metric 1
                  > via so-0/3/2.0
12.1.1.0/24      *[OSPF/10] 00:05:14, metric 2
                  > via so-0/3/2.0
14.1.1.0/24      *[OSPF/10] 00:00:08, metric 3
                  > to 35.1.1.2 via ge-3/1/0.0
                  via so-0/1/2.0
                  via so-0/3/2.0
16.1.1.0/24      *[OSPF/10] 00:05:14, metric 2
                  > via so-0/1/2.0
.....
```

### show route no-community detail

```
user@host> show route no-community detail

inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
    *Static Preference: 5
        Next-hop reference count: 22
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Age: 38:08
        Task: RT
        Announcement bits (1): 0-KRT
        AS path: I

10.209.0.0/16 (1 entry, 1 announced)
    *Static Preference: 5
        Next-hop reference count: 22
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Age: 38:08
        Task: RT
        Announcement bits (1): 0-KRT
        AS path: I
....
```

```
user@host> show route no-community extensive
```



show route  
no-community  
extensive

```
inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.10.0.0/16 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2:03:33
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

10.209.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.209.0.0/16 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2:03:33
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I
```

show route  
no-community terse

```
user@host> show route no-community terse

inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
* 10.10.0.0/16      S  5                >192.168.71.254
* 10.209.0.0/16     S  5                >192.168.71.254
* 10.255.71.52/32   D  0                >lo0.0
* 10.255.71.63/32   O 10             1  >35.1.1.2
* 10.255.71.64/32   O 10             2  >35.1.1.2
* 10.255.71.240/32  O 10             2  so-0/1/2.0
                    >so-0/3/2.0
* 10.255.71.241/32  O 10             1  >so-0/1/2.0
* 10.255.71.242/32  O 10             1  >so-0/3/2.0
* 12.1.1.0/24       O 10             2  >so-0/3/2.0
* 14.1.1.0/24       O 10             3  >35.1.1.2
                    so-0/1/2.0
                    so-0/3/2.0
* 16.1.1.0/24       O 10             2  >so-0/1/2.0
...

```



## show route protocol

---

<b>Syntax</b>	<code>show route protocol <i>protocol</i></code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>
<b>Syntax (EX Series Switches)</b>	<code>show route protocol <i>protocol</i></code> <code>&lt;brief   detail   extensive   terse&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>ospf2</b> and <b>ospf3</b> options introduced in Junos OS Release 9.2. <b>ospf2</b> and <b>ospf3</b> options introduced in Junos OS Release 9.2 for EX Series switches. <b>flow</b> option introduced in Junos OS Release 10.0. <b>flow</b> option introduced in Junos OS Release 10.0 for EX Series switches.
<b>Description</b>	Display the route entries in the routing table that were learned from a particular protocol.
<b>Options</b>	<b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b> .  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.  <b><i>protocol</i></b> —Protocol from which the route was learned: <ul style="list-style-type: none"><li>• <b>access</b>—Access route for use by DHCP application</li><li>• <b>access-internal</b>—Access-internal route for use by DHCP application</li><li>• <b>aggregate</b>—Locally generated aggregate route</li><li>• <b>arp</b>—Route learned through the Address Resolution Protocol</li><li>• <b>atmvpn</b>—Asynchronous Transfer Mode virtual private network</li><li>• <b>bgp</b>—Border Gateway Protocol</li><li>• <b>ccc</b>—Circuit cross-connect</li><li>• <b>direct</b>—Directly connected route</li><li>• <b>dvmrp</b>—Distance Vector Multicast Routing Protocol</li><li>• <b>esis</b>—End System-to-Intermediate System</li><li>• <b>flow</b>—Locally defined flow-specification route</li><li>• <b>frr</b>—Precomputed protection route or backup route used when a link goes down</li><li>• <b>isis</b>—Intermediate System-to-Intermediate System</li><li>• <b>ldp</b>—Label Distribution Protocol</li><li>• <b>l2circuit</b>—Layer 2 circuit</li><li>• <b>l2vpn</b>—Layer 2 virtual private network</li></ul>



- **local**—Local address
- **mpls**—Multiprotocol Label Switching
- **msdp**—Multicast Source Discovery Protocol
- **ospf**—Open Shortest Path First versions 2 and 3
- **ospf2**—Open Shortest Path First versions 2 only
- **ospf3**—Open Shortest Path First version 3 only
- **pim**—Protocol Independent Multicast
- **rip**—Routing Information Protocol
- **ripng**—Routing Information Protocol next generation
- **rsvp**—Resource Reservation Protocol
- **rtarget**—Local route target virtual private network
- **static**—Statically defined route
- **tunnel**—Dynamic tunnel
- **vpn**—Virtual private network



**NOTE:** EX Series switches run a subset of these protocols. See the switch CLI for details.

<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route protocol access on page 2575</a> <a href="#">show route protocol access-internal extensive on page 2575</a> <a href="#">show route protocol arp on page 2575</a> <a href="#">show route protocol bgp on page 2576</a> <a href="#">show route protocol bgp detail on page 2576</a> <a href="#">show route protocol bgp extensive on page 2576</a> <a href="#">show route protocol bgp terse on page 2577</a> <a href="#">show route protocol direct on page 2577</a> <a href="#">show route protocol frr on page 2577</a> <a href="#">show route protocol l2circuit detail on page 2578</a> <a href="#">show route protocol l2vpn extensive on page 2579</a> <a href="#">show route protocol ldp on page 2579</a> <a href="#">show route protocol ldp extensive on page 2580</a> <a href="#">show route protocol ospf (Layer 3 VPN) on page 2581</a> <a href="#">show route protocol ospf detail on page 2581</a> <a href="#">show route protocol rip on page 2582</a> <a href="#">show route protocol rip detail on page 2582</a> <a href="#">show route protocol ripng table inet6 on page 2582</a> <a href="#">show route protocol static detail on page 2582</a>



**Output Fields** For information about output fields, see the output field tables for the [show route](#) command, the [show route detail](#) command, the [show route extensive](#) command, or the [show route terse](#) command.



## Sample Output

### show route protocol access

```
user@host> show route protocol access
inet.0: 30380 destinations, 30382 routes (30379 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

13.160.0.3/32      *[Access/13] 00:00:09
> to 13.160.0.2 via fe-0/0/0.0
13.160.0.4/32      *[Access/13] 00:00:09
> to 13.160.0.2 via fe-0/0/0.0
13.160.0.5/32      *[Access/13] 00:00:09
> to 13.160.0.2 via fe-0/0/0.0
```

### show route protocol access-internal extensive

```
user@host> show route protocol access-internal 13.160.0.19 extensive
inet.0: 100020 destinations, 100022 routes (100019 active, 0 holddown, 1 hidden)
13.160.0.19/32 (1 entry, 1 announced)
TSI:
KRT in-kerne1 13.160.0.19/32 -> {13.160.0.2}
  *Access-internal Preference: 12
    Next-hop reference count: 200000
    Next hop: 13.160.0.2 via fe-0/0/0.0, selected
    State: <Active Int>
  Age: 36
    Task: RPD Unix Domain Server./var/run/rpd_serv.local
    Announcement bits (1): 0-KRT
    AS path: I
```

### show route protocol arp

```
user@host> show route protocol arp
inet.0: 43 destinations, 43 routes (42 active, 0 holddown, 1 hidden)

inet.3: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

cust1.inet.0: 1033 destinations, 2043 routes (1033 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

20.20.1.3/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
Unusable
20.20.1.4/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
Unusable
20.20.1.5/32      [ARP/4294967293] 00:04:32, from 20.20.1.1
Unusable
20.20.1.6/32      [ARP/4294967293] 00:04:34, from 20.20.1.1
Unusable
20.20.1.7/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
Unusable
20.20.1.8/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
Unusable
20.20.1.9/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
Unusable
20.20.1.10/32     [ARP/4294967293] 00:04:35, from 20.20.1.1
Unusable
20.20.1.11/32     [ARP/4294967293] 00:04:33, from 20.20.1.1
Unusable
20.20.1.12/32     [ARP/4294967293] 00:04:33, from 20.20.1.1
Unusable
20.20.1.13/32     [ARP/4294967293] 00:04:33, from 20.20.1.1
Unusable
...
```



**show route protocol  
bgp**

```

user@host> show route protocol bgp 192.168.64.0/21
inet.0: 335832 destinations, 335833 routes (335383 active, 0 holddown, 450 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.64.0/21      *[BGP/170] 6d 10:41:16, localpref 100, from 192.168.69.71
                    AS path: 10458 14203 2914 4788 4788 I
                    > to 192.168.167.254 via fxp0.0

```

**show route protocol  
bgp detail**

```

user@host> show route protocol bgp 66.117.63.0/24 detail
inet.0: 335805 destinations, 335806 routes (335356 active, 0 holddown, 450 hidden)
66.117.63.0/24 (1 entry, 1 announced)
  *BGP      Preference: 170/-101
            Next hop type: Indirect
            Next-hop reference count: 1006436
            Source: 192.168.69.71
            Next hop type: Router, Next hop index: 324
            Next hop: 192.168.167.254 via fxp0.0, selected
            Protocol next hop: 192.168.69.71
            Indirect next hop: 8e166c0 342
            State: <Active Ext>
            Local AS: 69 Peer AS: 10458
            Age: 6d 10:42:42 Metric2: 0
            Task: BGP_10458.192.168.69.71+179
            Announcement bits (3): 0-KRT 2-BGP RT Background 3-Resolve tree

1
  AS path: 10458 14203 2914 4788 4788 I
  Communities: 2914:410 2914:2403 2914:3400
  Accepted
  Localpref: 100
  Router ID: 207.17.136.192

```

**show route protocol  
bgp extensive**

```

user@host> show route protocol bgp 192.168.64.0/21 extensive
inet.0: 335827 destinations, 335828 routes (335378 active, 0 holddown, 450 hidden)
192.168.64.0/21 (1 entry, 1 announced)
TSI:
KRT in-kernel 1.9.0.0/16 -> {indirect(342)}
Page 0 idx 1 Type 1 val db31a80
  Nexthop: Self
  AS path: [69] 10458 14203 2914 4788 4788 I
  Communities: 2914:410 2914:2403 2914:3400
Path 1.9.0.0 from 192.168.69.71 Vector len 4. Val: 1
  *BGP      Preference: 170/-101
            Next hop type: Indirect
            Next-hop reference count: 1006502
            Source: 192.168.69.71
            Next hop type: Router, Next hop index: 324
            Next hop: 192.168.167.254 via fxp0.0, selected
            Protocol next hop: 192.168.69.71
            Indirect next hop: 8e166c0 342
            State: <Active Ext>
            Local AS: 69 Peer AS: 10458
            Age: 6d 10:44:45 Metric2: 0
            Task: BGP_10458.192.168.69.71+179
            Announcement bits (3): 0-KRT 2-BGP RT Background 3-Resolve tree

1
  AS path: 10458 14203 2914 4788 4788 I
  Communities: 2914:410 2914:2403 2914:3400

```



```

Accepted
Localpref: 100
Router ID: 207.17.136.192
Indirect next hops: 1
  Protocol next hop: 192.168.69.71
  Indirect next hop: 8e166c0 342
  Indirect path forwarding next hops: 1
    Next hop type: Router
    Next hop: 192.168.167.254 via fxp0.0
  192.168.0.0/16 Originating RIB: inet.0
  Node path count: 1
  Forwarding nexthops: 1
    Nexthop: 192.168.167.254 via fxp0.0

```

### show route protocol bgp terse

```
user@host> show route protocol bgp 192.168.64.0/21 terse
```

```

inet.0: 24 destinations, 32 routes (23 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf   Metric 1   Metric 2   Next hop      AS path
192.168.64.0/21   B 170      100           >100.1.3.2    10023 21 I

```

### show route protocol direct

```
user@host> show route protocol direct
```

```

inet.0: 335843 destinations, 335844 routes (335394 active, 0 holddown, 450 hidden)
+ = Active Route, - = Last Active, * = Both

8.8.8.0/24          *[Direct/0] 17w0d 10:31:49
> via fe-1/3/1.0
10.255.165.1/32     *[Direct/0] 25w4d 04:13:18
> via lo0.0
30.30.30.0/24       *[Direct/0] 17w0d 23:06:26
> via fe-1/3/2.0
192.168.164.0/22    *[Direct/0] 25w4d 04:13:20
> via fxp0.0

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

47.0005.80ff.f800.0000.0108.0001.0102.5516.5001/152
*[Direct/0] 25w4d 04:13:21
> via lo0.0

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

abcd::10:255:165:1/128
*[Direct/0] 25w4d 04:13:21
> via lo0.0
fe80::2a0:a5ff:fe12:ad7/128
*[Direct/0] 25w4d 04:13:21
> via lo0.0

```

### show route protocol frr

```
user@host> show route protocol frr
```

```

inet.0: 43 destinations, 43 routes (42 active, 0 holddown, 1 hidden)

inet.3: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

cust1.inet.0: 1033 destinations, 2043 routes (1033 active, 0 holddown, 0 hidden)

```



+ = Active Route, - = Last Active, \* = Both

```

20.20.1.3/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.3 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.4/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.4 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.5/32      *[FRR/200] 00:05:35, from 20.20.1.1
                  > to 20.20.1.5 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.6/32      *[FRR/200] 00:05:37, from 20.20.1.1
                  > to 20.20.1.6 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.7/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.7 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.8/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.8 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.9/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.9 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.10/32     *[FRR/200] 00:05:38, from 20.20.1.1
...

```

## show route protocol l2circuit detail

user@host> show route protocol l2circuit detail

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)  
100000 (1 entry, 1 announced)

```

*L2CKT Preference: 7
  Next hop: via ge-2/0/0.0, selected
  Label operation: Pop      Offset: 4
  State: <Active Int>
  Local AS:    99
  Age: 9:52
  Task: Common L2 VC
  Announcement bits (1): 0-KRT
  AS path: I

```

ge-2/0/0.0 (1 entry, 1 announced)

```

*L2CKT Preference: 7
  Next hop: via so-1/1/2.0 weight 1, selected
  Label-switched-path my-lsp
  Label operation: Push 100000, Push 100000(top)[0] Offset: -4
  Protocol next hop: 10.245.255.63
  Push 100000 Offset: -4
  Indirect next hop: 86af0c0 298
  State: <Active Int>
  Local AS:    99
  Age: 9:52
  Task: Common L2 VC
  Announcement bits (2): 0-KRT 1-Common L2 VC
  AS path: I

```

l2circuit.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

10.245.255.63:CtrlWord:4:3:Local/96 (1 entry, 1 announced)

```

*L2CKT Preference: 7
  Next hop: via so-1/1/2.0 weight 1, selected
  Label-switched-path my-lsp

```



```

Label operation: Push 100000[0]
Protocol next hop: 10.245.255.63 Indirect next hop: 86af000 296
State: <Active Int>
Local AS: 99
Age: 10:21
Task: 12 circuit
Announcement bits (1): 0-LDP
AS path: I
VC Label 100000, MTU 1500, VLAN ID 512

```

### show route protocol l2vpn extensive

```

user@host> show route protocol l2vpn extensive

inet.0: 14 destinations, 15 routes (13 active, 0 holddown, 1 hidden)

inet.3: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 7 destinations, 7 routes (7 active, 0 holddown, 0 hidden)
800001 (1 entry, 1 announced)
TSI:
KRT in-kernel 800001 /36 -> {so-0/0/0.0}
    *L2VPN Preference: 7
      Next hop: via so-0/0/0.0 weight 49087 balance 97%, selected
      Label operation: Pop Offset: 4
      State: <Active Int>
      Local AS: 69
      Age: 7:48
      Task: Common L2 VC
      Announcement bits (1): 0-KRT
      AS path: I

so-0/0/0.0 (1 entry, 1 announced)
TSI:
KRT in-kernel so-0/0/0.0 /16 -> {indirect(288)}
    *L2VPN Preference: 7
      Next hop: via so-0/0/1.0, selected
      Label operation: Push 800000 Offset: -4
      Protocol next hop: 10.255.14.220
      Push 800000 Offset: -4
      Indirect next hop: 85142a0 288
      State: <Active Int>
      Local AS: 69
      Age: 7:48
      Task: Common L2 VC
      Announcement bits (2): 0-KRT 1-Common L2 VC
      AS path: I
      Communities: target:69:1 Layer2-info: encaps:PPP,
      control flags:2, mtu: 0

```

### show route protocol ldp

```

user@host> show route protocol ldp

inet.0: 12 destinations, 13 routes (12 active, 0 holddown, 0 hidden)

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.16.1/32    *[LDP/9] 1d 23:03:35, metric 1
                  > via t1-4/0/0.0, Push 100000
192.168.17.1/32    *[LDP/9] 1d 23:03:35, metric 1
                  > via t1-4/0/0.0

```



```
private1___.inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
```

```
mpls.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
```

```
+ = Active Route, - = Last Active, * = Both
```

```
100064          *[LDP/9] 1d 23:03:35, metric 1
                 > via t1-4/0/0.0, Pop
100064(S=0)     *[LDP/9] 1d 23:03:35, metric 1
                 > via t1-4/0/0.0, Pop
100080          *[LDP/9] 1d 23:03:35, metric 1
                 > via t1-4/0/0.0, Swap 100000
```

### show route protocol ldp extensive

```
user@host> show route protocol ldp extensive
192.168.16.1/32 (1 entry, 1 announced)
  State: <FlashAll>
  *LDP   Preference: 9
         Next-hop reference count: 3
         Next hop: via t1-4/0/0.0, selected
         Label operation: Push 100000
         State: <Active Int>
         Local AS: 65500
         Age: 1d 23:03:58      Metric: 1
         Task: LDP
         Announcement bits (2): 0-Resolve tree 1 2-Resolve tree 2
         AS path: I

192.168.17.1/32 (1 entry, 1 announced)
  State: <FlashAll>
  *LDP   Preference: 9
         Next-hop reference count: 3
         Next hop: via t1-4/0/0.0, selected
         State: <Active Int>
         Local AS: 65500
         Age: 1d 23:03:58      Metric: 1
         Task: LDP
         Announcement bits (2): 0-Resolve tree 1 2-Resolve tree 2
         AS path: I

private1___.inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

mpls.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)

100064 (1 entry, 1 announced)
TSI:
KRT in-kerne1 100064 /36 -> {t1-4/0/0.0}
  *LDP   Preference: 9
         Next-hop reference count: 2
         Next hop: via t1-4/0/0.0, selected
         State: <Active Int>
         Local AS: 65500
         Age: 1d 23:03:58      Metric: 1
         Task: LDP
         Announcement bits (1): 0-KRT
         AS path: I
         Prefixes bound to route: 192.168.17.1/32

100064(S=0) (1 entry, 1 announced)
TSI:
KRT in-kerne1 100064 /40 -> {t1-4/0/0.0}
  *LDP   Preference: 9
```



```

Next-hop reference count: 2
Next hop: via t1-4/0/0.0, selected
Label operation: Pop
State: <Active Int>
Local AS: 65500
Age: 1d 23:03:58      Metric: 1
Task: LDP
Announcement bits (1): 0-KRT
AS path: I

100080 (1 entry, 1 announced)
TSI:
KRT in-kernel 100080 /36 -> {t1-4/0/0.0}
    *LDP      Preference: 9
              Next-hop reference count: 2
              Next hop: via t1-4/0/0.0, selected
              Label operation: Swap 100000
              State: <Active Int>
              Local AS: 65500
              Age: 1d 23:03:58      Metric: 1
              Task: LDP
              Announcement bits (1): 0-KRT
              AS path: I
              Prefixes bound to route: 192.168.16.1/32

```

#### show route protocol ospf (Layer 3 VPN)

```

user@host> show route protocol ospf
inet.0: 40 destinations, 40 routes (39 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.4/30      *[OSPF/10] 00:05:18, metric 4
                  > via t3-3/2/0.0
10.39.1.8/30      [OSPF/10] 00:05:18, metric 2
                  > via t3-3/2/0.0
10.255.14.171/32 *[OSPF/10] 00:05:18, metric 4
                  > via t3-3/2/0.0
10.255.14.179/32 *[OSPF/10] 00:05:18, metric 2
                  > via t3-3/2/0.0
224.0.0.5/32     *[OSPF/10] 20:25:55, metric 1

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.16/30     [OSPF/10] 00:05:43, metric 1
                  > via so-0/2/2.0
10.255.14.173/32 *[OSPF/10] 00:05:43, metric 1
                  > via so-0/2/2.0
224.0.0.5/32     *[OSPF/10] 20:26:20, metric 1

```

#### show route protocol ospf detail

```

user@host> show route protocol ospf detail
VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.16/30 (2 entries, 0 announced)
    OSPF      Preference: 10
              Nexthop: via so-0/2/2.0, selected
              State: <Int>
              Inactive reason: Route Preference
              Age: 6:25      Metric: 1
              Area: 0.0.0.0
              Task: VPN-AB-OSPF

```



```
AS path: I
Communities: Route-Type:0.0.0.0:1:0
```

```
...
```

#### show route protocol rip

```
user@host> show route protocol rip
inet.0: 26 destinations, 27 routes (25 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.255.14.177/32    *[RIP/100] 20:24:34, metric 2
                  > to 10.39.1.22 via t3-0/2/2.0
224.0.0.9/32      *[RIP/100] 00:03:59, metric 1
```

#### show route protocol rip detail

```
user@host> show route protocol rip detail
inet.0: 26 destinations, 27 routes (25 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.255.14.177/32 (1 entry, 1 announced)
    *RIP      Preference: 100
              Nexthop: 10.39.1.22 via t3-0/2/2.0, selected
              State: <Active Int>
              Age: 20:25:02   Metric: 2
              Task: VPN-AB-RIPv2
              Announcement bits (2): 0-KRT 2-BGP.0.0.0.0+179
              AS path: I
              Route learned from 10.39.1.22 expires in 96 seconds
```

#### show route protocol ripng table inet6

```
user@host> show route protocol ripng table inet6
inet6.0: 4215 destinations, 4215 routes (4214 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

1111::1/128      *[RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::2/128      *[RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::3/128      *[RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::4/128      *[RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::5/128      *[RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::6/128      *[RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
```

#### show route protocol static detail

```
user@host> show route protocol static detail
inet.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
10.5.0.0/16 (1 entry, 1 announced)
    *Static Preference: 5
      Next hop type: Router, Next hop index: 324
      Address: 0x9274010
      Next-hop reference count: 27
      Next hop: 192.168.187.126 via fxp0.0, selected
      Session Id: 0x0
      State: <Active NoReadvrt Int Ext>
```



```
Age: 7w3d 21:24:25
Validation State: unverified
Task: RT
Announcement bits (1): 0-KRT
AS path: I

10.10.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next hop type: Router, Next hop index: 324
    Address: 0x9274010
    Next-hop reference count: 27
    Next hop: 192.168.187.126 via fxp0.0, selected
    Session Id: 0x0
    State: <Active NoReadvrt Int Ext>
    Age: 7w3d 21:24:25
    Validation State: unverified
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

10.13.10.0/23 (1 entry, 1 announced)
  *Static Preference: 5
    Next hop type: Router, Next hop index: 324
    Address: 0x9274010
    Next-hop reference count: 27
    Next hop: 192.168.187.126 via fxp0.0, selected
    Session Id: 0x0
    State: <Active NoReadvrt Int Ext>
    Age: 7w3d 21:24:25
    Validation State: unverified
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I
```



## show route range

---

<b>Syntax</b>	<code>show route range</code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;destination-prefix&gt;</code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>
<b>Syntax (EX Series Switches)</b>	<code>show route range</code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;destination-prefix&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display routing table entries using a prefix range.
<b>Options</b>	<b>none</b> —Display standard information about all routing table entries using a prefix range.  <b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b> .  <b>destination-prefix</b> —(Optional) Destination and prefix mask for the range.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route range on page 2585</a> <a href="#">show route range destination-prefix on page 2585</a> <a href="#">show route range detail on page 2585</a> <a href="#">show route range extensive on page 2586</a> <a href="#">show route range terse on page 2587</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.



## Sample Output

### show route range

```
user@host> show route range

inet.0: 11 destinations, 11 routes (10 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.0.0/16      *[Static/5] 00:30:01
                  > to 192.168.71.254 via fxp0.0
10.209.0.0/16    *[Static/5] 00:30:01
                  > to 192.168.71.254 via fxp0.0
10.255.71.14/32  *[Direct/0] 00:30:01
                  > via lo0.0
172.16.0.0/12    *[Static/5] 00:30:01
                  > to 192.168.71.254 via fxp0.0
192.168.0.0/16   *[Static/5] 00:30:01
                  > to 192.168.71.254 via fxp0.0
192.168.64.0/21  *[Direct/0] 00:30:01
                  > via fxp0.0
192.168.71.14/32 *[Local/0] 00:30:01
                  Local via fxp0.0
192.168.102.0/23 *[Static/5] 00:30:01
                  > to 192.168.71.254 via fxp0.0
...
```

### show route range destination-prefix

```
user@host> show route range 192.168.0.0

inet.0: 11 destinations, 11 routes (10 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.0.0/16   *[Static/5] 00:31:14
                  > to 192.168.71.254 via fxp0.0
192.168.64.0/21  *[Direct/0] 00:31:14
                  > via fxp0.0
192.168.71.14/32 *[Local/0] 00:31:14
                  Local via fxp0.0
192.168.102.0/23 *[Static/5] 00:31:14
                  > to 192.168.71.254 via fxp0.0
```

### show route range detail

```
user@host> show route range detail

inet.0: 11 destinations, 11 routes (10 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
    *Static Preference: 5
        Next-hop reference count: 22
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Age: 30:05
        Task: RT
        Announcement bits (1): 0-KRT
        AS path: I

10.209.0.0/16 (1 entry, 1 announced)
    *Static Preference: 5
        Next-hop reference count: 22
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Age: 30:05
```



```
Task: RT
Announcement bits (1): 0-KRT
AS path: I

10.255.71.14/32 (1 entry, 0 announced)
*Direct Preference: 0
  Next hop type: Interface
  Next-hop reference count: 1
  Next hop: via lo0.0, selected
  State: <Active Int>
  Age: 30:05
  Task: IF
  AS path: I

172.16.0.0/12 (1 entry, 1 announced)
*Static Preference: 5
  Next-hop reference count: 22
  Next hop: 192.168.71.254 via fxp0.0, selected
  State: <Active NoReadvrt Int Ext>
  Age: 30:05
  Task: RT
  Announcement bits (1): 0-KRT
  AS path: I

...
```

#### **show route range extensive**

```
user@host> show route range extensive

inet.0: 11 destinations, 11 routes (10 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.10.0.0/16 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Age: 30:17
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

10.209.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.209.0.0/16 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Age: 30:17
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

10.255.71.14/32 (1 entry, 0 announced)
*Direct Preference: 0
  Next hop type: Interface
  Next-hop reference count: 1
  Next hop: via lo0.0, selected
  State: <Active Int>
  Age: 30:17
  Task: IF
```



```

AS path: I

172.16.0.0/12 (1 entry, 1 announced)
TSI:
KRT in-kernel 172.16.0.0/12 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Age: 30:17
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

...

```

**show route range terse** user@host> show route range terse

```

inet.0: 11 destinations, 11 routes (10 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
* 10.10.0.0/16      S  5                >192.168.71.254
* 10.209.0.0/16     S  5                >192.168.71.254
* 10.255.71.14/32   D  0                >1o0.0
* 172.16.0.0/12     S  5                >192.168.71.254
* 192.168.0.0/16    S  5                >192.168.71.254
* 192.168.64.0/21   D  0                >fxp0.0
* 192.168.71.14/32  L  0                Local
* 192.168.102.0/23  S  5                >192.168.71.254
* 207.17.136.0/24   S  5                >192.168.71.254
* 207.17.136.192/32 S  5                >192.168.71.254

__juniper_private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0
hidden)
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
* 10.0.0.0/8        D  0                >fxp2.0
                   D  0                >fxp1.0
* 10.0.0.4/32       L  0                Local

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
47.0005.80ff.f800.0000.0108.0001.0102.5507.1014/152
*                   D  0                >1o0.0

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
abcd::10:255:71:14/128
*                   D  0                >1o0.0
fe80::280:42ff:fe11:226f/128
*                   D  0                >1o0.0

__juniper_private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0
hidden)
+ = Active Route, - = Last Active, * = Both

```



A	Destination	P	Prf	Metric 1	Metric 2	Next hop	AS path
	fe80::280:42ff:fe11:226f/128						
*		D	0			>100.16385	



## show route receive-protocol

<b>Syntax</b>	show route receive-protocol <i>protocol neighbor-address</i> <brief   detail   extensive   terse> <logical-system (all   <i>logical-system-name</i> )>	
<b>Syntax (EX Series Switches)</b>	show route receive-protocol <i>protocol neighbor-address</i> <brief   detail   extensive   terse>	
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.	
<b>Description</b>	Display the routing information as it was received through a particular neighbor using a particular dynamic routing protocol.	
<b>Options</b>	<b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.  <b><i>protocol neighbor-address</i></b> —Protocol transmitting the route ( <b>bgp</b> , <b>dvmrp</b> , <b>msdp</b> , <b>pim</b> , <b>rip</b> , or <b>ripng</b> ) and address of the neighboring router from which the route entry was received.	
<b>Additional Information</b>	The output displays the selected routes and the attributes with which they were received, but does not show the effects of import policy on the routing attributes.	
<b>Required Privilege Level</b>	view	
<b>List of Sample Output</b>	<a href="#">show route receive-protocol bgp on page 2592</a> <a href="#">show route receive-protocol bgp extensive on page 2592</a> <a href="#">show route receive-protocol bgp table extensive on page 2592</a> <a href="#">show route receive-protocol bgp logical-system extensive on page 2592</a> <a href="#">show route receive-protocol bgp detail (Layer 2 VPN) on page 2593</a> <a href="#">show route receive-protocol bgp extensive (Layer 2 VPN) on page 2594</a> <a href="#">show route receive-protocol bgp (Layer 3 VPN) on page 2595</a> <a href="#">show route receive-protocol bgp detail (Layer 3 VPN) on page 2595</a> <a href="#">show route receive-protocol bgp extensive (Layer 3 VPN) on page 2596</a>	
<b>Output Fields</b>	Table 198 on page 2589 describes the output fields for the <b>show route receive-protocol</b> command. Output fields are listed in the approximate order in which they appear.	

Table 198: show route receive-protocol Output Fields

Field Name	Field Description	Level of Output
<i>routing-table-name</i>	Name of the routing table—for example, inet.0.	All levels
<i>number destinations</i>	Number of destinations for which there are routes in the routing table.	All levels



Table 198: show route receive-protocol Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b><i>number routes</i></b>	Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> <li>• <b>active</b></li> <li>• <b>holddown</b> (routes that are in pending state before being declared inactive)</li> <li>• <b>hidden</b> (routes that are not used because of a routing policy)</li> </ul>	All levels
<b>Prefix</b>	Destination prefix.	none <b>brief</b>
<b>MED</b>	Multiple exit discriminator value included in the route.	none <b>brief</b>
<b><i>destination-prefix (entry, announced)</i></b>	Destination prefix. The <b>entry</b> value is the number of routes for this destination, and the <b>announced</b> value is the number of routes being announced for this destination.	<b>detail extensive</b>
<b>Route Distinguisher</b>	64-bit prefix added to IP subnets to make them unique.	<b>detail extensive</b>
<b>Label-Base, range</b>	First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device.	<b>detail extensive</b>
<b>VPN Label</b>	Virtual private network (VPN) label. Packets are sent between CE and PE routing devices by advertising VPN labels. VPN labels transit over either an RSVP or an LDP label-switched path (LSP) tunnel.	<b>detail extensive</b>
<b>Next hop</b>	Next hop to the destination. An angle bracket ( > ) indicates that the route is the selected route.	All levels
<b>Localpref or Lclpref</b>	Local preference value included in the route.	All levels



Table 198: show route receive-protocol Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>AS path</b>	<p>Autonomous system (AS) path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• <b>I</b>—IGP.</li> <li>• <b>E</b>—EGP.</li> <li>• <b>?</b>—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li>• <b>[ ]</b>—Brackets enclose the number that precedes the AS path. This number represents the number of ASs present in the AS path, when calculated as defined in RFC 4271. This value is used the AS-path merge process, as defined in RFC 4893.</li> <li>• <b>[ ]</b>—If more than one AS number is configured on the router, or if AS path prepending is configured, brackets enclose the local AS number associated with the AS path.</li> <li>• <b>{ }</b>—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li>• <b>( )</b>—Parentheses enclose a confederation.</li> <li>• <b>( [ ] )</b>—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>	All levels
<b>Cluster list</b>	(For route reflected output only) Cluster ID sent by the route reflector.	<b>detail extensive</b>
<b>Originator ID</b>	(For route reflected output only) Address of routing device that originally sent the route to the route reflector.	<b>detail extensive</b>
<b>Communities</b>	Community path attribute for the route. See the Output Field table in the <a href="#">show route detail</a> command for all possible values for this field.	<b>detail extensive</b>
<b>AIGP</b>	Accumulated interior gateway protocol (AIGP) BGP attribute.	<b>detail extensive</b>
<b>Attrset AS</b>	Number, local preference, and path of the AS that originated the route. These values are stored in the <b>Attrset</b> attribute at the originating routing device.	<b>detail extensive</b>
<b>Layer2-info: encaps</b>	Layer 2 encapsulation (for example, VPLS).	<b>detail extensive</b>
<b>control flags</b>	Control flags: <b>none</b> or <b>Site Down</b> .	<b>detail extensive</b>
<b>mtu</b>	Maximum transmission unit (MTU) of the Layer 2 circuit.	<b>detail extensive</b>



## Sample Output

**show route  
receive-protocol bgp**

```
user@host> show route receive-protocol bgp 10.255.245.215

inet.0: 28 destinations, 33 routes (27 active, 0 holddown, 1 hidden)
Prefix          Next hop          MED      Lclpref    AS path
10.22.1.0/24     10.255.245.215    0        100        I
10.22.2.0/24     10.255.245.215    0        100        I
```

**show route  
receive-protocol bgp  
extensive**

```
user@host> show route receive-protocol bgp 10.255.245.63 extensive

inet.0: 244 destinations, 244 routes (243 active, 0 holddown, 1 hidden)
Prefix          Next hop          MED      Lclpref    AS path
1.1.1.0/24 (1 entry, 1 announced)
  Next hop: 10.0.50.3
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.45
165.3.0.0/16 (1 entry, 1 announced)
  Next hop: 111.222.5.254
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.68
165.4.0.0/16 (1 entry, 1 announced)
  Next hop: 111.222.5.254
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.45
195.1.2.0/24 (1 entry, 1 announced)
  Next hop: 111.222.5.254
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.68
inet.2: 63 destinations, 63 routes (63 active, 0 holddown, 0 hidden)
Prefix          Next hop          MED      Lclpref    AS path
inet.3: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix          Next hop          MED      Lclpref    AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Next hop          MED      Lclpref    AS path
mpls.0: 48 destinations, 48 routes (48 active, 0 holddown, 0 hidden)
```

**show route  
receive-protocol bgp  
table extensive**

```
user@host> show route receive-protocol bgp 207.17.136.192 table inet.0 66.117.68.0/24 extensive

inet.0: 227315 destinations, 227316 routes (227302 active, 0 holddown, 13 hidden)
* 66.117.63.0/24 (1 entry, 1 announced)
  Nexthop: 207.17.136.29
  Localpref: 100
  AS path: AS2 PA[6]: 14203 2914 3356 29748 33437 AS_TRANS
  AS path: AS4 PA[2]: 33437 393219
  AS path: Merged[6]: 14203 2914 3356 29748 33437 393219 I
  Communities: 2914:420
```

**show route  
receive-protocol bgp**

```
user@host> show route receive-protocol bgp 10.0.0.9 logical-system PE4 extensive

inet.0: 12 destinations, 13 routes (12 active, 0 holddown, 0 hidden)
* 10.0.0.0/30 (1 entry, 1 announced)
```



logical-system  
extensive

```

Accepted
Route Label: 3
Nexthop: 10.0.0.9
AS path: 13979 I

* 10.0.0.4/30 (1 entry, 1 announced)
Accepted
Route Label: 3
Nexthop: 10.0.0.9
AS path: 13979 I

10.0.0.8/30 (2 entries, 1 announced)
Accepted
Route Label: 3
Nexthop: 10.0.0.9
AS path: 13979 I

* 10.9.9.1/32 (1 entry, 1 announced)
Accepted
Route Label: 3
Nexthop: 10.0.0.9
AS path: 13979 I

* 10.100.1.1/32 (1 entry, 1 announced)
Accepted
Route Label: 3
Nexthop: 10.0.0.9
AS path: 13979 I

* 44.0.0.0/24 (1 entry, 1 announced)
Accepted
Route Label: 300096
Nexthop: 10.0.0.9
AS path: 13979 I
AIGP: 203

* 55.0.0.0/24 (1 entry, 1 announced)
Accepted
Route Label: 300112
Nexthop: 10.0.0.9
AS path: 13979 7018 I
AIGP: 25

* 66.0.0.0/24 (1 entry, 1 announced)
Accepted
Route Label: 300144
Nexthop: 10.0.0.9
AS path: 13979 7018 I

* 99.0.0.0/24 (1 entry, 1 announced)
Accepted
Route Label: 300160
Nexthop: 10.0.0.9
AS path: 13979 7018 I

```

show route  
receive-protocol bgp  
detail (Layer 2 VPN)

```

user@host> show route receive-protocol bgp 10.255.14.171 detail
inet.0: 68 destinations, 68 routes (67 active, 0 holddown, 1 hidden)
Prefix                Nexthop                MED    Lclpref AS path
inet.3: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Prefix                Nexthop                MED    Lclpref AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```



```

Prefix          Nexthop          MED    Lclpref AS path
mpls.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
frame-vpn.l2vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0
hidden)
Prefix          Nexthop          MED    Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 1 announced)
  Route Distinguisher: 10.255.245.35:1
  Label-base : 800000, range : 4, status-vector : 0x0
  Nexthop: 10.255.245.35
  Localpref: 100
  AS path: I
  Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
control flags: 0, mtu: 0
bgp.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 0 announced)
  Route Distinguisher: 10.255.245.35:1
  Label-base : 800000, range : 4, status-vector : 0x0
  Nexthop: 10.255.245.35
  Localpref: 100
  AS path: I
  Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
control flags:0, mtu: 0

```

**show route**  
**receive-protocol bgp**

```

user@host> show route receive-protocol bgp 10.255.14.171 extensive
inet.0: 68 destinations, 68 routes (67 active, 0 holddown, 1 hidden)
Prefix          Nexthop          MED    Lclpref AS path

```



### extensive (Layer 2 VPN)

```

inet.3: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
mpls.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
frame-vpn.l2vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 1 announced)
  Route Distinguisher: 10.255.245.35:1
  Label-base : 800000, range : 4, status-vector : 0x0
  Nexthop: 10.255.245.35
  Localpref: 100
  AS path: I
  Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
  control flags:0, mtu: 0
bgp.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 0 announced)
  Route Distinguisher: 10.255.245.35:1
  Label-base : 800000, range : 4, status-vector : 0x0
  Nexthop: 10.255.245.35
  Localpref: 100
  AS path: I
  Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
  control flags:0, mtu: 0

```

### show route receive-protocol bgp (Layer 3 VPN)

```

user@host> show route receive-protocol bgp 10.255.14.171
inet.0: 33 destinations, 33 routes (32 active, 0 holddown, 1 hidden)
Prefix          Nexthop          MED      Lclpref AS path
inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
VPN-A.inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
10.255.14.175/32  10.255.14.171          100 2 I
10.255.14.179/32  10.255.14.171          2    100 I
VPN-B.inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
10.255.14.175/32  10.255.14.171          100 2 I
10.255.14.177/32  10.255.14.171          100 I
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
mpls.0: 9 destinations, 9 routes (9 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
bgp.l3vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
10.255.14.171:300:10.255.14.177/32
                  10.255.14.171          100 I
10.255.14.171:100:10.255.14.179/32
                  10.255.14.171          2    100 I
10.255.14.171:200:10.255.14.175/32
                  10.255.14.171          100 2 I

```

### show route receive-protocol bgp detail (Layer 3 VPN)

```

user@host> show route receive-protocol bgp 10.255.14.174 detail
inet.0: 16 destinations, 17 routes (15 active, 0 holddown, 1 hidden)
inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
vpna.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
* 10.49.0.0/30 (1 entry, 1 announced)
  Route Distinguisher: 10.255.14.176:2
  VPN Label: 101264

```



```
Nexthop: 10.255.14.174
Localpref: 100
AS path: I
Communities: target:200:100
AttrSet AS: 100
    Localpref: 100
    AS path: I
* 10.255.14.172/32 (1 entry, 1 announced)
    Route Distinguisher: 10.255.14.176:2
    VPN Label: 101280
    Nexthop: 10.255.14.174
    Localpref: 100
    AS path: I
    Communities: target:200:100
    AttrSet AS: 100
        Localpref: 100
        AS path: I
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
bgp.l3vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
* 10.255.14.174:2:10.49.0.0/30 (1 entry, 0 announced)
    Route Distinguisher: 10.255.14.174:2
    VPN Label: 101264
    Nexthop: 10.255.14.174
    Localpref: 100
    AS path: I
    Communities: target:200:100
    AttrSet AS: 100
        Localpref: 100
        AS path: I
* 10.255.14.174:2:10.255.14.172/32 (1 entry, 0 announced)
    Route Distinguisher: 10.255.14.174:2
    VPN Label: 101280
    Nexthop: 10.255.14.174
    Localpref: 100
    AS path: I
    Communities: target:200:100
    AttrSet AS: 100
        Localpref: 100
        AS path: I
inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
```

**show route**  
**receive-protocol bgp**

```
user@host> show route receive-protocol bgp 10.255.245.63 extensive
inet.0: 244 destinations, 244 routes (243 active, 0 holddown, 1 hidden)
  Prefix                Nexthop                MED    Lclpref AS path
```



### extensive (Layer 3 VPN)

```

1.1.1.0/24 (1 entry, 1 announced)
  Nexthop: 10.0.50.3
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.45
165.3.0.0/16 (1 entry, 1 announced)
  Nexthop: 111.222.5.254
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.68
165.4.0.0/16 (1 entry, 1 announced)
  Nexthop: 111.222.5.254
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.45
195.1.2.0/24 (1 entry, 1 announced)
  Nexthop: 111.222.5.254
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.68
inet.2: 63 destinations, 63 routes (63 active, 0 holddown, 0 hidden)
Prefix      Nexthop      MED    Lclpref AS path
inet.3: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix      Nexthop      MED    Lclpref AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix      Nexthop      MED    Lclpref AS path
mpls.0: 48 destinations, 48 routes (48 active, 0 holddown, 0 hidden)

```



## show route resolution

---

<b>Syntax</b>	<pre>show route resolution &lt;brief   detail   extensive   summary&gt; &lt;index <i>index</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;prefix&gt; &lt;table <i>routing-table-name</i>&gt; &lt;unresolved&gt;</pre>
<b>Syntax (EX Series Switches)</b>	<pre>show route resolution &lt;brief   detail   extensive   summary&gt; &lt;index <i>index</i>&gt; &lt;prefix&gt; &lt;table <i>routing-table-name</i>&gt; &lt;unresolved&gt;</pre>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display the entries in the next-hop resolution database. This database provides for recursive resolution of next hops through other prefixes in the routing table.
<b>Options</b>	<p><b>none</b>—Display standard information about all entries in the next-hop resolution database.</p> <p><b>brief   detail   extensive   summary</b>—(Optional) Display the specified level of output.</p> <p><b>index <i>index</i></b>—(Optional) Show the index of the resolution tree.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>prefix <i>network/destination-prefix</i></b>—(Optional) Display database entries for the specified address.</p> <p><b>table <i>routing-table-name</i></b>—(Optional) Display information about a particular routing table (for example, <b>inet.0</b>) where policy-based export is currently enabled.</p> <p><b>unresolved</b>—(Optional) Display routes that could not be resolved.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Configuring Route Resolution on PE Routers</li></ul>
<b>List of Sample Output</b>	<p><a href="#">show route resolution detail on page 2600</a></p> <p><a href="#">show route resolution summary on page 2600</a></p> <p><a href="#">show route resolution unresolved on page 2600</a></p>



**Output Fields** Table 199 on page 2599 describes the output fields for the **show route resolution** command. Output fields are listed in the approximate order in which they appear.

**Table 199: show route resolution Output Fields**

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table whose prefixes are resolved using the entries in the route resolution database. For routing table groups, this is the name of the primary routing table whose prefixes are resolved using the entries in the route resolution database.
<b>Tree index</b>	Tree index identifier.
<b>Nodes</b>	Number of nodes in the tree.
<b>Reference count</b>	Number of references made to the next hop.
<b>Contributing routing tables</b>	Routing tables used for next-hop resolution.
<b>Originating RIB</b>	Name of the routing table whose active route was used to determine the forwarding next-hop entry in the resolution database. For example, in the case of <b>inet.0</b> resolving through <b>inet.0</b> and <b>inet.3</b> , this field indicates which routing table, <b>inet.0</b> or <b>inet.3</b> , provided the best path for a particular prefix.
<b>Metric</b>	Metric associated with the forwarding next hop.
<b>Node path count</b>	Number of nodes in the path.
<b>Forwarding next hops</b>	Number of forwarding next hops. The forwarding next hop is the network layer address of the directly reachable neighboring system (if applicable) and the interface used to reach it.



## Sample Output

### show route resolution detail

```
user@host> show route resolution detail
Tree Index: 1, Nodes 0, Reference Count 1
Contributing routing tables: inet.3
Tree Index: 2, Nodes 23, Reference Count 1
Contributing routing tables: inet.0 inet.3
10.10.0.0/16 Originating RIB: inet.0
  Node path count: 1
  Forwarding nexthops: 1
10.31.1.0/30 Originating RIB: inet.0
  Node path count: 1
  Forwarding nexthops: 1
10.31.1.1/32 Originating RIB: inet.0
  Node path count: 1
  Forwarding nexthops: 0
10.31.1.4/30 Originating RIB: inet.0
  Node path count: 1
  Forwarding nexthops: 1
10.31.1.5/32 Originating RIB: inet.0
  Node path count: 1
  Forwarding nexthops: 0
10.31.2.0/30 Originating RIB: inet.0
  Metric: 2 Node path count: 1
  Forwarding nexthops: 2
10.31.11.0/24 Originating RIB: inet.0
  Node path count: 1
  Forwarding nexthops: 1
```

### show route resolution summary

```
user@host> show route resolution summary
Tree Index: 1, Nodes 24, Reference Count 1
Contributing routing tables: :voice.inet.0 :voice.inet.3
Tree Index: 2, Nodes 2, Reference Count 1
Contributing routing tables: inet.3
Tree Index: 3, Nodes 43, Reference Count 1
Contributing routing tables: inet.0 inet.3
```

### show route resolution unresolved

```
user@host> show route resolution unresolved
Tree Index 1
vt-3/2/0.32769.0      /16
  Protocol Nexthop: 10.255.71.238 Push 800000
  Indirect nexthop: 0 -
vt-3/2/0.32772.0      /16
  Protocol Nexthop: 10.255.70.103 Push 800008
  Indirect nexthop: 0 -
Tree Index 2
```



## show route snooping

---

<b>Syntax</b>	<pre>show route snooping &lt;brief   detail   extensive   terse&gt; &lt;all&gt; &lt;best address/prefix&gt; &lt;exact address&gt; &lt;range prefix-range&gt; &lt;summary&gt; &lt;table table-name&gt;</pre>
<b>Release Information</b>	<p>Command introduced in Junos OS Release 8.5.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
<b>Description</b>	Display the entries in the routing table that were learned from snooping.
<b>Options</b>	<p><b>none</b>—Display the entries in the routing table that were learned from snooping.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b>.</p> <p><b>all</b>—(Optional) Display all entries, including hidden entries.</p> <p><b>best address/prefix</b>—(Optional) Display the longest match for the provided address and optional prefix.</p> <p><b>exact address/prefix</b>—(Optional) Display exact matches for the provided address and optional prefix.</p> <p><b>range prefix-range</b>—(Optional) Display information for the provided address range.</p> <p><b>summary</b>—(Optional) Display route snooping summary statistics.</p> <p><b>table table-name</b>—(Optional) Display information for the named table.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route snooping detail on page 2602</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.



## Sample Output

**show route snooping  
detail**

```
user@host> show route snooping detail
__+domainAll__.inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
  224.0.0.2/32 (1 entry, 1 announced)
    *IGMP Preference: 0
      Next hop type: MultiRecv
      Next-hop reference count: 4
      State: <Active NoReadvrt Int>
      Age: 2:24
      Task: IGMP
      Announcement bits (1): 0-KRT
      AS path: I

  224.0.0.22/32 (1 entry, 1 announced)
    *IGMP Preference: 0
      Next hop type: MultiRecv
      Next-hop reference count: 4
      State: <Active NoReadvrt Int>
      Age: 2:24
      Task: IGMP
      Announcement bits (1): 0-KRT
      AS path: I

__+domainAll__.inet.1: 36 destinations, 36 routes (36 active, 0 holddown, 0 hidden)
  224.0.0.0.0.0.0.0/24 (1 entry, 1 announced)
    *Multicast Preference: 180
      Next hop type: Multicast (IPv4), Next hop index: 1048584
      Next-hop reference count: 4
      State: <Active Int>
      Age: 2:24
      Task: MC
      Announcement bits (1): 0-KRT
      AS path: I

  225.0.0.2.11.11.11.100.3.9.0.0/80 (1 entry, 1 announced)
    *Multicast Preference: 180
      Next hop type: Multicast (IPv4)
      Next-hop reference count: 113
      State: <Active Int>
      Age: 2:13
      Task: MC
      Announcement bits (1): 0-KRT
      AS path: I

  225.0.0.3.11.11.11.100.3.9.0.0/80 (1 entry, 1 announced)
    *Multicast Preference: 180
      Next hop type: Multicast (IPv4)
      Next-hop reference count: 113
      State: <Active Int>
      Age: 2:15
      Task: MC
      Announcement bits (1): 0-KRT
      AS path: I

  225.0.0.4.11.11.11.100.3.9.0.0/80 (1 entry, 1 announced)
    *Multicast Preference: 180
      Next hop type: Multicast (IPv4)
      Next-hop reference count: 113
```



```
State: <Active Int>
Age: 2:17
Task: MC
Announcement bits (1): 0-KRT
AS path: I

225.0.0.5.11.11.11.100.3.9.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 1:58
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

225.0.0.6.11.11.11.100.3.9.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:14
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

225.0.0.7.11.11.11.100.3.9.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:12
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

225.0.0.9.11.11.11.100.3.9.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:13
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

225.0.0.10.11.11.11.100.3.9.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:15
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

226.0.0.1.11.11.11.100.3.10.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
```



```
Age: 2:09
Task: MC
Announcement bits (1): 0-KRT
AS path: I

226.0.0.2.11.11.11.100.3.10.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 8
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

226.0.0.4.11.11.11.100.3.10.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:10
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

226.0.0.8.11.11.11.100.3.10.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:12
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

226.0.0.10.11.11.11.100.3.10.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 1:56
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

227.0.0.1.11.11.11.100.3.11.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:10
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

227.0.0.2.11.11.11.100.3.11.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:13
```



```
Task: MC
Announcement bits (1): 0-KRT
AS path: I

227.0.0.3.11.11.11.100.3.11.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:16
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

227.0.0.4.11.11.11.100.3.11.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:15
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

227.0.0.5.11.11.11.100.3.11.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 1:57
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

227.0.0.7.11.11.11.100.3.11.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 1:57
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

227.0.0.8.11.11.11.100.3.11.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:10
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

227.0.0.10.11.11.11.100.3.11.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:15
    Task: MC
```



```
Announcement bits (1): 0-KRT
AS path: I

228.0.0.1.11.11.11.100.3.12.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:09
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

228.0.0.2.11.11.11.100.3.12.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:18
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

228.0.0.7.11.11.11.100.3.12.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:11
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

228.0.0.8.11.11.11.100.3.12.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:17
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

228.0.0.9.11.11.11.100.3.12.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 8
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

228.0.0.10.11.11.11.100.3.12.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:12
    Task: MC
    Announcement bits (1): 0-KRT
```



```
AS path: I

229.0.0.3.11.11.11.100.3.13.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:09
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

229.0.0.4.11.11.11.100.3.13.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:12
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

229.0.0.5.11.11.11.100.3.13.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 9
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

229.0.0.6.11.11.11.100.3.13.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:15
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

229.0.0.7.11.11.11.100.3.13.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:15
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

229.0.0.8.11.11.11.100.3.13.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:15
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I
```



229.0.0.9.11.11.11.100.3.13.0.0/80 (1 entry, 1 announced)

\*Multicast Preference: 180  
Next hop type: Multicast (IPv4)  
Next-hop reference count: 113  
State: <Active Int>  
Age: 2:14  
Task: MC  
Announcement bits (1): 0-KRT  
AS path: I

229.0.0.10.11.11.11.100.3.13.0.0/80 (1 entry, 1 announced)

\*Multicast Preference: 180  
Next hop type: Multicast (IPv4)  
Next-hop reference count: 113  
State: <Active Int>  
Age: 2:13  
Task: MC  
Announcement bits (1): 0-KRT  
AS path: I



## show route source-gateway

---

<b>Syntax</b>	show route source-gateway <i>address</i> <brief   detail   extensive   terse> <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	show route source-gateway <i>address</i> <brief   detail   extensive   terse>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display the entries in the routing table that were learned from a particular address. The <b>Source</b> field in the <b>show route detail</b> command output lists the source for each route, if known.
<b>Options</b>	<b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b> .  <b>address</b> —IP address of the system.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route source-gateway on page 2610</a> <a href="#">show route source-gateway detail on page 2610</a> <a href="#">show route source-gateway extensive on page 2612</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.



## Sample Output

**show route  
source-gateway**

```
user@host> show route source-gateway 10.255.70.103
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.255.70.103:1:3:1/96
    *[BGP/170] 12:12:24, localpref 100, from 10.255.70.103
    AS path: I
    > via so-0/3/0.0, label-switched-path green-r1-r3

red.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.255.70.103:2:3:1/96
    *[BGP/170] 12:12:24, localpref 0, from 10.255.70.103
    AS path: I
    > via so-0/3/0.0, label-switched-path green-r1-r3

bgp.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.255.70.103:1:3:1/96
    *[BGP/170] 12:12:24, localpref 100, from 10.255.70.103
    AS path: I
    > via so-0/3/0.0, label-switched-path green-r1-r3

10.255.70.103:2:3:1/96
    *[BGP/170] 12:12:24, localpref 0, from 10.255.70.103
    AS path: I
    > via so-0/3/0.0, label-switched-path green-r1-r3
```

**show route  
source-gateway detail**

```
user@host> show route source-gateway 10.255.70.103 detail
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
```



Restart Complete

private1\_\_\_.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

Restart Complete

mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)

Restart Complete

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

Restart Complete

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)

Restart Complete

10.255.70.103:1:3:1/96 (1 entry, 1 announced)

```
*BGP      Preference: 170/-101
          Route Distinguisher: 10.255.70.103:1
          Next-hop reference count: 7
          Source: 10.255.70.103
          Protocol next hop: 10.255.70.103
          Indirect next hop: 2 no-forward
          State: <Secondary Active Int Ext>
          Local AS: 69 Peer AS: 69
          Age: 12:14:00 Metric2: 1
          Task: BGP_69.10.255.70.103+179
          Announcement bits (1): 0-green-l2vpn
          AS path: I
          Communities: target:11111:1 Layer2-info: encaps:VPLS,
          control flags:, mtu: 0
          Label-base: 800008, range: 8
          Localpref: 100
          Router ID: 10.255.70.103
          Primary Routing Table bgp.l2vpn.0
```

red.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

Restart Complete

10.255.70.103:2:3:1/96 (1 entry, 1 announced)

```
*BGP      Preference: 170/-1
          Route Distinguisher: 10.255.70.103:2
          Next-hop reference count: 7
          Source: 10.255.70.103
          Protocol next hop: 10.255.70.103
          Indirect next hop: 2 no-forward
          State: <Secondary Active Int Ext>
          Local AS: 69 Peer AS: 69
          Age: 12:14:00 Metric2: 1
          Task: BGP_69.10.255.70.103+179
          Announcement bits (1): 0-red-l2vpn
          AS path: I
          Communities: target:11111:2 Layer2-info: encaps:VPLS,
          control flags:Site-Down, mtu: 0
          Label-base: 800016, range: 8
          Localpref: 0
          Router ID: 10.255.70.103
          Primary Routing Table bgp.l2vpn.0
```

bgp.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)

Restart Complete



```

10.255.70.103:1:3:1/96 (1 entry, 0 announced)
  *BGP    Preference: 170/-101
          Route Distinguisher: 10.255.70.103:1
          Next-hop reference count: 7
          Source: 10.255.70.103
          Protocol next hop: 10.255.70.103
          Indirect next hop: 2 no-forward
          State: <Active Int Ext>
          Local AS: 69 Peer AS: 69
          Age: 12:14:00 Metric2: 1
          Task: BGP_69.10.255.70.103+179
          AS path: I
          Communities: target:11111:1 Layer2-info: encaps:VPLS, control
flags:, mtu: 0
Label-base: 800008, range: 8
Localpref: 100
Router ID: 10.255.70.103
Secondary Tables: green.l2vpn.0
10.255.70.103:2:3:1/96 (1 entry, 0 announced)
  *BGP    Preference: 170/-1
          Route Distinguisher: 10.255.70.103:2
          Next-hop reference count: 7
          Source: 10.255.70.103
          Protocol next hop: 10.255.70.103
          Indirect next hop: 2 no-forward
          State: <Active Int Ext>
          Local AS: 69 Peer AS: 69
          Age: 12:14:00 Metric2: 1
          Task: BGP_69.10.255.70.103+179
          AS path: I
          Communities: target:11111:2 Layer2-info: encaps:VPLS,
control flags:Site-Down,
mtu: 0
Label-base: 800016, range: 8
Localpref: 0
Router ID: 10.255.70.103
Secondary Tables: red.l2vpn.0

```

#### show route source-gateway extensive

```

user@host> show route source-gateway 10.255.70.103 extensive
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
Restart Complete

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
10.255.70.103:1:3:1/96 (1 entry, 1 announced)
  *BGP    Preference: 170/-101
          Route Distinguisher: 10.255.70.103:1

```



```

Next-hop reference count: 7
Source: 10.255.70.103
Protocol next hop: 10.255.70.103
Indirect next hop: 2 no-forward
State: <Secondary Active Int Ext>
Local AS: 69 Peer AS: 69
Age: 12:15:24 Metric2: 1
Task: BGP_69.10.255.70.103+179
Announcement bits (1): 0-green-12vpn
AS path: I
Communities: target:11111:1 Layer2-info: encaps:VPLS,
control flags:, mtu: 0
Label-base: 800008, range: 8
Localpref: 100
Router ID: 10.255.70.103
Primary Routing Table bgp.12vpn.0

```

```

red.12vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
Restart Complete

```

```

10.255.70.103:2:3:1/96 (1 entry, 1 announced)
*BGP Preference: 170/-1
Route Distinguisher: 10.255.70.103:2
Next-hop reference count: 7
Source: 10.255.70.103
Protocol next hop: 10.255.70.103
Indirect next hop: 2 no-forward
State: <Secondary Active Int Ext>
Local AS: 69 Peer AS: 69
Age: 12:15:24 Metric2: 1
Task: BGP_69.10.255.70.103+179
Announcement bits (1): 0-red-12vpn
AS path: I
Communities: target:11111:2 Layer2-info: encaps:VPLS,
control flags:Site-Down, mtu: 0
Label-base: 800016, range: 8
Localpref: 0
Router ID: 10.255.70.103
Primary Routing Table bgp.12vpn.0

```

```

bgp.12vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

```

```

10.255.70.103:1:3:1/96 (1 entry, 0 announced)
*BGP Preference: 170/-101
Route Distinguisher: 10.255.70.103:1
Next-hop reference count: 7
Source: 10.255.70.103
Protocol next hop: 10.255.70.103
Indirect next hop: 2 no-forward
State: <Active Int Ext>
Local AS: 69 Peer AS: 69
Age: 12:15:24 Metric2: 1
Task: BGP_69.10.255.70.103+179
AS path: I
Communities: target:11111:1 Layer2-info: encaps:VPLS,
control flags:, mtu: 0
Label-base: 800008, range: 8
Localpref: 100
Router ID: 10.255.70.103
Secondary Tables: green.12vpn.0

```



```
Indirect next hops: 1
  Protocol next hop: 10.255.70.103 Metric: 2
  Indirect next hop: 2 no-forward
  Indirect path forwarding next hops: 1
Next hop:      via so-0/3/0.0 weight 0x1
              10.255.70.103/32 Originating RIB: inet.3
              Metric: 2                      Node path count: 1
              Forwarding nexthops: 1
              Nexthop: via so-0/3/0.0

10.255.70.103:2:3:1/96 (1 entry, 0 announced)
  *BGP Preference: 170/-1
  Route Distinguisher: 10.255.70.103:2
  Next-hop reference count: 7
  Source: 10.255.70.103
  Protocol next hop: 10.255.70.103
  Indirect next hop: 2 no-forward
  State: <Active Int Ext>
  Local AS: 69 Peer AS: 69
  Age: 12:15:24 Metric2: 1
  Task: BGP_69.10.255.70.103+179
  AS path: I
  Communities: target:11111:2 Layer2-info: encaps:VPLS,
  control flags:Site-Down,
  mtu: 0
  Label-base: 800016, range: 8
  Localpref: 0
  Router ID: 10.255.70.103
  Secondary Tables: red.12vpn.0
  Indirect next hops: 1
    Protocol next hop: 10.255.70.103 Metric: 2
    Indirect next hop: 2 no-forward
    Indirect path forwarding next hops: 1
  Next hop:      via so-0/3/0.0 weight 0x1
                10.255.70.103/32 Originating RIB: inet.3
                Metric: 2                      Node path count: 1
                Forwarding nexthops: 1
                Nexthop: via so-0/3/0.0
```



## show route summary

<b>Syntax</b>	show route summary <logical-system (all   <i>logical-system-name</i> )> <table <i>routing-table-name</i> >
<b>Syntax (EX Series Switches)</b>	show route summary
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	<p>Display summary statistics about the entries in the routing table.</p> <p>CPU utilization might increase while the device learns routes. We recommend that you use the <b>show route summary</b> command after the device learns and enters the routes into the routing table. Depending on the size of your network, this might take several minutes. If you receive a “timeout communicating with routing daemon” error when using the <b>show route summary</b> command, wait several minutes before attempting to use the command again. This is not a critical system error, but you might experience a delay in using the command-line interface (CLI).</p>
<b>Options</b>	<p><b>none</b>—Display summary statistics about the entries in the routing table.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>table <i>routing-table-name</i></b>—(Optional) Display summary statistics for all routing tables whose name begins with this string (for example, <b>inet.0</b> and <b>inet6.0</b> are both displayed when you run the <b>show route summary table inet</b> command). If you only want to display statistics for a specific routing table, make sure to enter the exact name of that routing table.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route summary on page 2617</a> <a href="#">show route summary table on page 2617</a> <a href="#">show route summary table (with Route Limits Configured for the Routing Table) on page 2618</a>
<b>Output Fields</b>	Table 200 on page 2615 lists the output fields for the <b>show route summary</b> command. Output fields are listed in the approximate order in which they appear.

**Table 200: show route summary Output Fields**

Field Name	Field Description
<b>Router ID</b>	Address of the local routing device.
<b><i>routing-table-name</i></b>	Name of the routing table (for example, <b>inet.0</b> ).



Table 200: show route summary Output Fields (*continued*)

Field Name	Field Description
<b>destinations</b>	Number of destinations for which there are routes in the routing table.
<b>routes</b>	<p>Number of routes in the routing table:</p> <ul style="list-style-type: none"> <li>• <b>active</b>—Number of routes that are active.</li> <li>• <b>holddown</b>—Number of routes that are in the hold-down state before being declared inactive.</li> <li>• <b>hidden</b>—Number of routes that are not used because of routing policy.</li> </ul>
<b>Limit/Threshold</b>	<p>Displays the configured route limits for the routing table set with the <a href="#">maximum-prefixes</a> and the <a href="#">maximum-paths</a> statements. If you do not configure route limits for the routing table, the show output does not display this information.</p> <ul style="list-style-type: none"> <li>• <b>destinations</b>—The first number represents the maximum number of route prefixes installed in the routing table. The second number represents the number of route prefixes that trigger a warning message.</li> <li>• <b>routes</b>—The first number represents the maximum number of routes. The second number represents the number of routes that trigger a warning message.</li> </ul>
<b>Direct</b>	Routes on the directly connected network.
<b>Local</b>	Local routes.
<b><i>protocol-name</i></b>	Name of the protocol from which the route was learned. For example, <b>OSPF</b> , <b>RSVP</b> , and <b>Static</b> .



## Sample Output

```

show route summary  user@host> show route summary
Autonomous system number: 69
Router ID: 10.255.71.52
Maximum-ECMP: 32
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
    Direct:    6 routes,      5 active
    Local:    4 routes,      4 active
    OSPF:     5 routes,      4 active
    Static:   7 routes,      7 active
    IGMP:     1 routes,      1 active
    PIM:      2 routes,      2 active

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
    RSVP:      2 routes,      2 active

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete
    Direct:      1 routes,      1 active

mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete
    MPLS:       3 routes,      3 active
    VPLS:       4 routes,      2 active

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
Restart Complete
    Direct:      2 routes,      2 active
    PIM:         2 routes,      2 active
    MLD:         1 routes,      1 active

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
    BGP:         2 routes,      2 active
    L2VPN:       2 routes,      2 active

red.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
Restart Complete
    BGP:         2 routes,      2 active
    L2VPN:       1 routes,      1 active

bgp.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
    BGP:         4 routes,      4 active

```

```

show route summary  user@host> show route summary table inet
table
Router ID: 192.168.0.1

```

```

inet.0: 32 destinations, 34 routes (31 active, 0 holddown, 1 hidden)
    Direct:    6 routes,      5 active
    Local:    9 routes,      9 active
    OSPF:     3 routes,      1 active
    Static:   13 routes,     13 active
    IGMP:     1 routes,      1 active
    PIM:      2 routes,      2 active

```



```
inet.1: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
      Multicast:      1 routes,      1 active

inet6.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
      Local:      1 routes,      1 active
      PIM:      2 routes,      2 active

inet6.1: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
      Multicast:      1 routes,      1 active
```

**show route summary  
table (with Route  
Limits Configured for  
the Routing Table)**

```
user@host> show route summary table VPN-A.inet.0
Autonomous system number: 100
Router ID: 10.255.182.142

VPN-A.inet.0: 13 destinations, 14 routes (13 active, 0 holddown, 0 hidden)
Limit/Threshold: 2000/200 destinations 20/12 routes
      Direct:      2 routes,      2 active
      Local:      1 routes,      1 active
      OSPF:      4 routes,      3 active
      BGP:      4 routes,      4 active
      IGMP:      1 routes,      1 active
      PIM:      2 routes,      2 active
```



## show route table

<b>Syntax</b>	<pre>show route table <i>routing-table-name</i> &lt;brief   detail   extensive   terse&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>
<b>Syntax (EX Series Switches)</b>	<pre>show route table <i>routing-table-name</i> &lt;brief   detail   extensive   terse&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
<b>Description</b>	Display the route entries in a particular routing table.
<b>Options</b>	<p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b><i>routing-table-name</i></b>—Display route entries for all routing tables whose name begins with this string (for example, inet.0 and inet6.0 are both displayed when you run the <b>show route table inet</b> command).</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show route summary on page 2615</a></li> </ul>
<b>List of Sample Output</b>	<p><a href="#">show route table bgp.l2.vpn on page 2621</a></p> <p><a href="#">show route table bgp.l3vpn.0 on page 2621</a></p> <p><a href="#">show route table bgp.l3vpn.0 detail on page 2621</a></p> <p><a href="#">show route table bgp.rtarget.0 (When Proxy BGP Route Target Filtering Is Configured) on page 2622</a></p> <p><a href="#">show route table inet.0 on page 2623</a></p> <p><a href="#">show route table inet6.0 on page 2623</a></p> <p><a href="#">show route table inet6.3 on page 2623</a></p> <p><a href="#">show route table inetflow detail on page 2623</a></p> <p><a href="#">show route table l2circuit.0 on page 2624</a></p> <p><a href="#">show route table mpls on page 2624</a></p> <p><a href="#">show route table mpls extensive on page 2625</a></p> <p><a href="#">show route table mpls.0 on page 2625</a></p> <p><a href="#">show route table mpls.0 (RSVP Route—Transit LSP) on page 2625</a></p> <p><a href="#">show route table vpls_1 detail on page 2626</a></p> <p><a href="#">show route table vpn-a on page 2626</a></p> <p><a href="#">show route table vpn-a.mdt.0 on page 2626</a></p> <p><a href="#">show route table VPN-A detail on page 2627</a></p> <p><a href="#">show route table VPN-AB.inet.0 on page 2627</a></p> <p><a href="#">show route table VPN_blue.mvpn-inet6.0 on page 2627</a></p> <p><a href="#">show route table VPN-A detail on page 2628</a></p>



[show route table inetflow detail on page 2628](#)

**Output Fields** For information about output fields, see the output field tables for the [show route](#) command, the [show route detail](#) command, the [show route extensive](#) command, or the [show route terse](#) command.



## Sample Output

### show route table bgp.l2vpn

```
user@host> show route table bgp.l2vpn
bgp.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.24.1:1:4:1/96
    *[BGP/170] 01:08:58, localpref 100, from 192.168.24.1
    AS path: I
    > to 10.0.16.2 via fe-0/0/1.0, label-switched-path am
```

### show route table bgp.l3vpn.0

```
user@host> show route table bgp.l3vpn.0
bgp.l3vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.71.15:100:10.255.71.17/32
    *[BGP/170] 00:03:59, MED 1, localpref 100, from
10.255.71.15
    AS path: I
    > via so-2/1/0.0, Push 100020, Push 100011(top)
10.255.71.15:200:10.255.71.18/32
    *[BGP/170] 00:03:59, MED 1, localpref 100, from
10.255.71.15
    AS path: I
    > via so-2/1/0.0, Push 100021, Push 100011(top)
```

### show route table bgp.l3vpn.0 detail

```
user@host> show route table bgp.l3vpn.0 detail
bgp.l3vpn.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)

10.255.245.12:1:4.0.0.0/8 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 10.255.245.12:1
    Source: 10.255.245.12
    Next hop: 192.168.208.66 via fe-0/0/0.0, selected
    Label operation: Push 182449
    Protocol next hop: 10.255.245.12
    Push 182449
    Indirect next hop: 863a630 297
    State: <Active Int Ext>
    Local AS: 35 Peer AS: 35
    Age: 12:19 Metric2: 1
    Task: BGP_35.10.255.245.12+179
    Announcement bits (1): 0-BGP.0.0.0.0+179
    AS path: 30 10458 14203 2914 3356 I (Atomic) Aggregator: 3356 4.68.0.11

    Communities: 2914:420 target:11111:1 origin:56:78
    VPN Label: 182449
    Localpref: 100
    Router ID: 10.255.245.12

10.255.245.12:1:4.17.225.0/24 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 10.255.245.12:1
    Source: 10.255.245.12
    Next hop: 192.168.208.66 via fe-0/0/0.0, selected
    Label operation: Push 182465
    Protocol next hop: 10.255.245.12
    Push 182465
```



```

Indirect next hop: 863a8f0 305
State: <Active Int Ext>
Local AS: 35 Peer AS: 35
Age: 12:19 Metric2: 1
Task: BGP_35.10.255.245.12+179
Announcement bits (1): 0-BGP.0.0.0.0+179
AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496 I
Communities: 2914:410 target:12:34 target:11111:1 origin:12:34
VPN Label: 182465
Localpref: 100
Router ID: 10.255.245.12

10.255.245.12:1:4.17.226.0/23 (1 entry, 1 announced)
*BGP Preference: 170/-101
Route Distinguisher: 10.255.245.12:1
Source: 10.255.245.12
Next hop: 192.168.208.66 via fe-0/0/0.0, selected
Label operation: Push 182465
Protocol next hop: 10.255.245.12
Push 182465
Indirect next hop: 86bd210 330
State: <Active Int Ext>
Local AS: 35 Peer AS: 35
Age: 12:19 Metric2: 1
Task: BGP_35.10.255.245.12+179
Announcement bits (1): 0-BGP.0.0.0.0+179
AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496
6496 I
Communities: 2914:410 target:12:34 target:11111:1 origin:12:34
VPN Label: 182465
Localpref: 100
Router ID: 10.255.245.12

10.255.245.12:1:4.17.251.0/24 (1 entry, 1 announced)
*BGP Preference: 170/-101
Route Distinguisher: 10.255.245.12:1
Source: 10.255.245.12
Next hop: 192.168.208.66 via fe-0/0/0.0, selected
Label operation: Push 182465
Protocol next hop: 10.255.245.12
Push 182465
Indirect next hop: 86bd210 330
State: <Active Int Ext>
Local AS: 35 Peer AS: 35
Age: 12:19 Metric2: 1
Task: BGP_35.10.255.245.12+179
Announcement bits (1): 0-BGP.0.0.0.0+179
AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496
6496 I
Communities: 2914:410 target:12:34 target:11111:1 origin:12:34
VPN Label: 182465
Localpref: 100

```

**show route table  
bgp.rtarget.0 (When  
Proxy BGP Route**

```

user@host> show route table bgp.rtarget.0
bgp.rtarget.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

```



## Target Filtering Is Configured)

```
100:100:100/96
*[RTarget/5] 00:03:14
  Type Proxy
    for 10.255.165.103
    for 10.255.166.124
  Local
```

## show route table inet.0

```
user@host> show route table inet.0
inet.0: 12 destinations, 12 routes (11 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0          *[Static/5] 00:51:57
                   > to 111.222.5.254 via fxp0.0
1.0.0.1/32         *[Direct/0] 00:51:58
                   > via at-5/3/0.0
1.0.0.2/32         *[Local/0] 00:51:58
                   Local
12.12.12.21/32     *[Local/0] 00:51:57
                   Reject
13.13.13.13/32     *[Direct/0] 00:51:58
                   > via t3-5/2/1.0
13.13.13.14/32     *[Local/0] 00:51:58
                   Local
13.13.13.21/32     *[Local/0] 00:51:58
                   Local
13.13.13.22/32     *[Direct/0] 00:33:59
                   > via t3-5/2/0.0
127.0.0.1/32       [Direct/0] 00:51:58
                   > via lo0.0
111.222.5.0/24     *[Direct/0] 00:51:58
                   > via fxp0.0
111.222.5.81/32    *[Local/0] 00:51:58
                   Local
```

## show route table inet6.0

```
user@host> show route table inet6.0
inet6.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Route, * = Both

fec0:0:0:3::/64   *[Direct/0] 00:01:34
>via fe-0/1/0.0

fec0:0:0:3::/128  *[Local/0] 00:01:34
>Local

fec0:0:0:4::/64   *[Static/5] 00:01:34
>to fec0:0:0:3::ffff via fe-0/1/0.0
```

## show route table inet6.3

```
user@router> show route table inet6.3
inet6.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

::10.255.245.195/128
                   *[LDP/9] 00:00:22, metric 1
                   > via so-1/0/0.0
::10.255.245.196/128
                   *[LDP/9] 00:00:08, metric 1
                   > via so-1/0/0.0, Push 100008
```



**show route table  
inetflow detail**

```

user@host> show route table inetflow detail
inetflow.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
10.12.44.1,*/48 (1 entry, 1 announced)
    *BGP    Preference: 170/-101
            Next-hop reference count: 2
            State: **Active Ext>
            Local AS: 65002 Peer AS: 65000
            Age: 4
            Task: BGP_65000.10.12.99.5+3792
            Announcement bits (1): 0-Flow
            AS path: 65000 I
            Communities: traffic-rate:0:0
            Validation state: Accept, Originator: 10.12.99.5
            Via: 10.12.44.0/24, Active
            Localpref: 100
            Router ID: 10.255.71.161

10.12.56.1,*/48 (1 entry, 1 announced)
    *Flow    Preference: 5
            Next-hop reference count: 2
            State: **Active>
            Local AS: 65002
            Age: 6:30
            Task: RT Flow
            Announcement bits (2): 0-Flow 1-BGP.0.0.0.0+179
            AS path: I
            Communities: 1:1

```

**show route table  
l2circuit.0**

```

user@host> show route table l2circuit.0
l2circuit.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.1.1.195:NoCtrlWord:1:1:Local/96
    * [L2CKT/7] 00:50:47
    > via so-0/1/2.0, Push 100049
    via so-0/1/3.0, Push 100049
10.1.1.195:NoCtrlWord:1:1:Remote/96
    * [LDP/9] 00:50:14
    Discard
10.1.1.195:CtrlWord:1:2:Local/96
    * [L2CKT/7] 00:50:47
    > via so-0/1/2.0, Push 100049
    via so-0/1/3.0, Push 100049
10.1.1.195:CtrlWord:1:2:Remote/96
    * [LDP/9] 00:50:14
    Discard

```

**show route table mpls**

```

user@host> show route table mpls
mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0          * [MPLS/0] 00:13:55, metric 1
           Receive
1          * [MPLS/0] 00:13:55, metric 1
           Receive
2          * [MPLS/0] 00:13:55, metric 1
           Receive
1024       * [VPN/0] 00:04:18
           to table red.inet.0, Pop

```



### show route table mpls extensive

```
user@host> show route table mpls extensive
100000 (1 entry, 1 announced)
TSI:
KRT in-kerne1 100000 /36 -> {so-1/0/0.0}
    *LDP      Preference: 9
              Next hop: via so-1/0/0.0, selected
              Pop
              State: <Active Int>
              Age: 29:50      Metric: 1
              Task: LDP
              Announcement bits (1): 0-KRT
              AS path: I
              Prefixes bound to route: 10.0.0.194/32
```

### show route table mpls.0

```
user@host> show route table mpls.0
mpls.0: 11 destinations, 11 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0          *[MPLS/0] 00:45:09, metric 1
           Receive
1          *[MPLS/0] 00:45:09, metric 1
           Receive
2          *[MPLS/0] 00:45:09, metric 1
           Receive
100000     *[L2VPN/7] 00:43:04
           > via so-0/1/0.1, Pop
100001     *[L2VPN/7] 00:43:03
           > via so-0/1/0.2, Pop      Offset: 4
100002     *[LDP/9] 00:43:22, metric 1
           via so-0/1/2.0, Pop
           > via so-0/1/3.0, Pop
100002(S=0) *[LDP/9] 00:43:22, metric 1
           via so-0/1/2.0, Pop
           > via so-0/1/3.0, Pop
100003     *[LDP/9] 00:43:22, metric 1
           > via so-0/1/2.0, Swap 100002
           via so-0/1/3.0, Swap 100002
100004     *[LDP/9] 00:43:16, metric 1
           via so-0/1/2.0, Swap 100049
           > via so-0/1/3.0, Swap 100049
so-0/1/0.1 *[L2VPN/7] 00:43:04
           > via so-0/1/2.0, Push 100001, Push 100049(top)
           via so-0/1/3.0, Push 100001, Push 100049(top)
so-0/1/0.2 *[L2VPN/7] 00:43:03
           via so-0/1/2.0, Push 100000, Push 100049(top) Offset: -4
           > via so-0/1/3.0, Push 100000, Push 100049(top) Offset: -4
```

### show route table mpls.0 (RSVP Route—Transit LSP)

```
user@host> show route table mpls.0
mpls.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0          *[MPLS/0] 00:37:31, metric 1
           Receive
1          *[MPLS/0] 00:37:31, metric 1
           Receive
2          *[MPLS/0] 00:37:31, metric 1
           Receive
```



```

13          *[MPLS/0] 00:37:31, metric 1
            Receive
300352      *[RSVP/7/1] 00:08:00, metric 1
            > to 8.64.0.106 via ge-1/0/1.0, label-switched-path lsp1_p2p
300352(S=0) *[RSVP/7/1] 00:08:00, metric 1
            > to 8.64.0.106 via ge-1/0/1.0, label-switched-path lsp1_p2p
300384      *[RSVP/7/2] 00:05:20, metric 1
            > to 8.64.1.106 via ge-1/0/0.0, Pop
300384(S=0) *[RSVP/7/2] 00:05:20, metric 1
            > to 8.64.1.106 via ge-1/0/0.0, Pop

```

#### show route table vpls\_1 detail

```

user@host> show route table vpls_1 detail
vpls_1.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

1.1.1.11:1000:1:1/96 (1 entry, 1 announced)
*L2VPN Preference: 170/-1
Receive table: vpls_1.l2vpn.0
Next-hop reference count: 2
State: <Active Int Ext>
Age: 4:29:47 Metric2: 1
Task: vpls_1-l2vpn
Announcement bits (1): 1-BGP.0.0.0.0+179
AS path: I
Communities: Layer2-info: encaps:VPLS, control flags:Site-Down
Label-base: 800000, range: 8, status-vector: 0xFF

```

#### show route table vpn-a

```

user@host> show route table vpn-a
vpn-a.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

+ = Active Route, - = Last Active, * = Both
192.168.16.1:1:1:1/96
    *[VPN/7] 05:48:27
    Discard
192.168.24.1:1:2:1/96
    *[BGP/170] 00:02:53, localpref 100, from 192.168.24.1
    AS path: I
    > to 10.0.16.2 via fe-0/0/1.0, label-switched-path am
192.168.24.1:1:3:1/96
    *[BGP/170] 00:02:53, localpref 100, from 192.168.24.1
    AS path: I
    > to 10.0.16.2 via fe-0/0/1.0, label-switched-path am

```

#### show route table vpn-a.mdt.0

```

user@host> show route table vpn-a.mdt.0
vpn-a.mdt.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1:1:0:10.255.14.216:232.1.1.1/144
    *[MVPN/70] 01:23:05, metric2 1
    Indirect
1:1:1:10.255.14.218:232.1.1.1/144
    *[BGP/170] 00:57:49, localpref 100, from 10.255.14.218
    AS path: I
    > via so-0/0/0.0, label-switched-path r0e-to-r1
1:1:2:10.255.14.217:232.1.1.1/144
    *[BGP/170] 00:57:49, localpref 100, from 10.255.14.217
    AS path: I
    > via so-0/0/1.0, label-switched-path r0-to-r2

```



### show route table VPN-A detail

```

user@host> show route table VPN-A detail
VPN-AB.inet.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
10.255.179.9/32 (1 entry, 1 announced)
    *BGP      Preference: 170/-101
                Route Distinguisher: 10.255.179.13:200
                Next hop type: Indirect
                Next-hop reference count: 5
                Source: 10.255.179.13
                Next hop type: Router, Next hop index: 732
                Next hop: 10.39.1.14 via fe-0/3/0.0, selected
                Label operation: Push 299824, Push 299824(top)
                Protocol next hop: 10.255.179.13
                Push 299824
                Indirect next hop: 8f275a0 1048574
                State: (Secondary Active Int Ext)
                Local AS: 1 Peer AS: 1
                Age: 3:41:06 Metric: 1 Metric2: 1
                Task: BGP_1.10.255.179.13+64309
                Announcement bits (2): 0-KRT 1-BGP RT Background
                AS path: I
                Communities: target:1:200 rte-type:0.0.0.0:1:0
                Import Accepted
                VPN Label: 299824 TTL Action: vrf-ttl-propagate
                Localpref: 100
                Router ID: 10.255.179.13
                Primary Routing Table bgp.13vpn.0

```

### show route table VPN-AB.inet.0

```

user@host> show route table VPN-AB.inet.0
VPN-AB.inet.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.0/30      *[OSPF/10] 00:07:24, metric 1
                  > via so-7/3/1.0
10.39.1.4/30      *[Direct/0] 00:08:42
                  > via so-5/1/0.0
10.39.1.6/32      *[Local/0] 00:08:46
                  Local
10.255.71.16/32   *[Static/5] 00:07:24
                  > via so-2/0/0.0
10.255.71.17/32   *[BGP/170] 00:07:24, MED 1, localpref 100, from
10.255.71.15
                  AS path: I
                  > via so-2/1/0.0, Push 100020, Push 100011(top)
10.255.71.18/32   *[BGP/170] 00:07:24, MED 1, localpref 100, from
10.255.71.15
                  AS path: I
                  > via so-2/1/0.0, Push 100021, Push 100011(top)
10.255.245.245/32 *[BGP/170] 00:08:35, localpref 100
                  AS path: 2 I
                  > to 10.39.1.5 via so-5/1/0.0
10.255.245.246/32 *[OSPF/10] 00:07:24, metric 1
                  > via so-7/3/1.0

```

### show route table VPN\_blue.mvpn-inet6.0

```

user@host> show route table VPN_blue.mvpn-inet6.0
vpn_blue.mvpn-inet6.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1:10.255.2.202:65535:10.255.2.202/432

```



```

* [BGP/170] 00:02:37, localpref 100, from 10.255.2.202
  AS path: I
  > via so-0/1/3.0
1:10.255.2.203:65535:10.255.2.203/432
* [BGP/170] 00:02:37, localpref 100, from 10.255.2.203
  AS path: I
  > via so-0/1/0.0
1:10.255.2.204:65535:10.255.2.204/432
* [MVPN/70] 00:57:23, metric2 1
  Indirect
5:10.255.2.202:65535:128::192.168.90.2:128:ffff::1/432
* [BGP/170] 00:02:37, localpref 100, from 10.255.2.202
  AS path: I
  > via so-0/1/3.0
6:10.255.2.203:65535:65000:128::10.12.53.12:128:ffff::1/432
* [PIM/105] 00:02:37
  Multicast (IPv6)
7:10.255.2.202:65535:65000:128::192.168.90.2:128:ffff::1/432
* [MVPN/70] 00:02:37, metric2 1
  Indirect

```

#### show route table VPN-A detail

```

user@host> show route table VPN-A detail
VPN-AB.inet.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
10.255.179.9/32 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 10.255.179.13:200
    Next hop type: Indirect
    Next-hop reference count: 5
    Source: 10.255.179.13
    Next hop type: Router, Next hop index: 732
    Next hop: 10.39.1.14 via fe-0/3/0.0, selected
    Label operation: Push 299824, Push 299824(top)
    Protocol next hop: 10.255.179.13
    Push 299824
    Indirect next hop: 8f275a0 1048574
    State: (Secondary Active Int Ext)
    Local AS: 1 Peer AS: 1
    Age: 3:41:06 Metric: 1 Metric2: 1
    Task: BGP_1.10.255.179.13+64309
    Announcement bits (2): 0-KRT 1-BGP RT Background
    AS path: I
    Communities: target:1:200 rte-type:0.0.0.0:1:0
    Import Accepted
    VPN Label: 299824 TTL Action: vrf-ttl-propagate
    Localpref: 100
    Router ID: 10.255.179.13
    Primary Routing Table bgp.13vpn.0

```

#### show route table inetflow detail

```

user@host> show route table inetflow detail
inetflow.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
10.12.44.1,*/48 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    Next-hop reference count: 2
    State: **Active Ext>
    Local AS: 65002 Peer AS: 65000
    Age: 4
    Task: BGP_65000.10.12.99.5+3792
    Announcement bits (1): 0-Flow
    AS path: 65000 I
    Communities: traffic-rate:0:0

```



```

Validation state: Accept, Originator: 10.12.99.5
Via: 10.12.44.0/24, Active
Localpref: 100
Router ID: 10.255.71.161

10.12.56.1,*/48 (1 entry, 1 announced)
  *Flow Preference: 5
    Next-hop reference count: 2
    State: **Active>
    Local AS: 65002
    Age: 6:30
    Task: RT Flow
    Announcement bits (2): 0-Flow 1-BGP.0.0.0.0+179
    AS path: I
    Communities: 1:1

user@PE1> show route table green.l2vpn.0 (VPLS Multihoming with FEC 129)
green.l2vpn.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1.1.1.2:100:1.1.1.2/96 AD
    *[VPLS/170] 1d 03:11:03, metric2 1
    Indirect
1.1.1.4:100:1.1.1.4/96 AD
    *[BGP/170] 1d 03:11:02, localpref 100, from 1.1.1.4
    AS path: I, validation-state: unverified
    > via ge-1/2/1.5
1.1.1.2:100:1:0/96 MH
    *[VPLS/170] 1d 03:11:03, metric2 1
    Indirect
1.1.1.4:100:1:0/96 MH
    *[BGP/170] 1d 03:11:02, localpref 100, from 1.1.1.4
    AS path: I, validation-state: unverified
    > via ge-1/2/1.5
1.1.1.4:NoCtrlWord:5:100:100:1.1.1.2:1.1.1.4/176
    *[VPLS/7] 1d 03:11:02, metric2 1
    > via ge-1/2/1.5
1.1.1.4:NoCtrlWord:5:100:100:1.1.1.4:1.1.1.2/176
    *[LDP/9] 1d 03:11:02
    Discard

```



## show route terse


<b>Syntax</b>	show route terse <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	show route terse
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display a high-level summary of the routes in the routing table.
	<div>  <p><b>NOTE:</b> For BGP routes, the <b>show route terse</b> command displays the local preference attribute and MED instead of the metric1 and metric2 values. This is mostly due to historical reasons.</p> <p>To display the metric1 and metric2 value of a BGP route, use the <a href="#">show route extensive</a> command.</p> </div>
<b>Options</b>	<p><b>none</b>—Display a high-level summary of the routes in the routing table.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route terse on page 2632</a>
<b>Output Fields</b>	<a href="#">Table 201 on page 2630</a> describes the output fields for the <b>show route terse</b> command. Output fields are listed in the approximate order in which they appear.

Table 201: show route terse Output Fields

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table (for example, inet.0).
<i>number destinations</i>	Number of destinations for which there are routes in the routing table.
<i>number routes</i>	Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> <li><b>active</b> (routes that are active)</li> <li><b>holddown</b> (routes that are in the pending state before being declared inactive)</li> <li><b>hidden</b> (routes that are not used because of a routing policy)</li> </ul>



Table 201: show route terse Output Fields (*continued*)

Field Name	Field Description
<b>route key</b>	Key for the state of the route: <ul style="list-style-type: none"> <li>• <b>+</b>—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>-</b>—A hyphen indicates the last active route.</li> <li>• <b>*</b>—An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul>
<b>A</b>	Active route. An asterisk (*) indicates this is the active route.
<b>V</b>	Validation status of the route: <ul style="list-style-type: none"> <li>• <b>?</b>—Not evaluated. Indicates that the route was not learned through BGP.</li> <li>• <b>I</b>—Invalid. Indicates that the prefix is found, but either the corresponding AS received from the EBGP peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database.</li> <li>• <b>N</b>—Unknown. Indicates that the prefix is not among the prefixes or prefix ranges in the database.</li> <li>• <b>V</b>—Valid. Indicates that the prefix and autonomous system pair are found in the database.</li> </ul>
<b>Destination</b>	Destination of the route.
<b>P</b>	Protocol through which the route was learned: <ul style="list-style-type: none"> <li>• <b>A</b>—Aggregate</li> <li>• <b>B</b>—BGP</li> <li>• <b>C</b>—CCC</li> <li>• <b>D</b>—Direct</li> <li>• <b>G</b>—GMPLS</li> <li>• <b>I</b>—IS-IS</li> <li>• <b>L</b>—L2CKT, L2VPN, LDP, Local</li> <li>• <b>K</b>—Kernel</li> <li>• <b>M</b>—MPLS, MSDP</li> <li>• <b>O</b>—OSPF</li> <li>• <b>P</b>—PIM</li> <li>• <b>R</b>—RIP, RIPng</li> <li>• <b>S</b>—Static</li> <li>• <b>T</b>—Tunnel</li> </ul>
<b>Prf</b>	Preference value of the route. In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value.
<b>Metric 1</b>	First metric value in the route. For routes learned from BGP, this is the MED metric.
<b>Metric 2</b>	Second metric value in the route. For routes learned from BGP, this is the IGP metric.



Table 201: show route terse Output Fields (*continued*)

Field Name	Field Description
<b>Next hop</b>	Next hop to the destination. An angle bracket (>) indicates that the route is the selected route.
<b>AS path</b>	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>I—IGP.</li> <li>E—EGP.</li> <li>?—Incomplete; typically, the AS path was aggregated.</li> </ul>

## Sample Output

### show route terse

```

user@host> show route terse
inet.0: 10 destinations, 12 routes (10 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

A V Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
* ? 1.0.1.1/32        O  10      1          >10.0.0.2      I
?                               B 170      100          >10.0.0.2      I
  unverified                               >10.0.0.2
* ? 1.1.1.1/32        D   0          >10.0.0.2
* V 2.2.0.2/32        B 170     110      >10.0.0.2      200 I
  valid                               >10.0.0.2
* ? 10.0.0.0/30       D   0      >10.0.0.2
?                               B 170     100      >10.0.0.2      I
  unverified                               >10.0.0.2
* ? 10.0.0.1/32       L   0      Local
* ? 10.0.0.4/30       B 170     100      >10.0.0.2      I
  unverified                               >10.0.0.2
* ? 10.0.0.8/30       B 170     100      >10.0.0.2      I
  unverified                               >10.0.0.2
* I 172.16.1.1/32     B 170      90      >10.0.0.2      200 I
  invalid                               >10.0.0.2
* N 192.168.2.3/32    B 170     100      >10.0.0.2      200 I
  unknown                               >10.0.0.2
* ? 224.0.0.5/32      O  10      1      MultiRecv

```



## CHAPTER 30

# Troubleshooting

- [Troubleshooting Procedures on page 2633](#)

## Troubleshooting Procedures

---

- [Troubleshooting Virtual Routing Instances on page 2633](#)

## Troubleshooting Virtual Routing Instances

- [Direct Routes Not Leaked Between Routing Instances on page 2633](#)

### Direct Routes Not Leaked Between Routing Instances

---

**Problem** Direct routes are not exported (leaked) between virtual routing instances. For example, consider the following scenario:

- QFX switch with two virtual routing instances:
  - Routing instance 1 connects to downstream device through interface xe-0/0/1.
  - Routing instance 2 connects to upstream device through interface xe-0/0/2.

If you enable route leaking between the routing instances (by using the **rib-group** statement, for example), the downstream device cannot connect to the upstream device because the QFX switch connects to the upstream device over a direct route and these routes are not leaked between instances.



**NOTE:** You can see a route to the upstream device in the routing table of the downstream device, but this route is not functional.

Indirect routes *are* leaked between routing instances, so the downstream device can connect to any upstream devices that are connected to the QFX switch over indirect routes.

**Solution** This is expected behavior.



- Related Documentation**
- [Understanding Virtual Router Routing Instances on page 2316](#)
  - [Configuring Virtual Router Routing Instances on page 2323](#)
  - [rib-group on page 2427](#)



## PART 10

# Border Gateway Protocol

- [Overview on page 2637](#)
- [Configuration on page 2643](#)
- [Administration on page 3071](#)







## CHAPTER 31

# Overview

- [BGP Overview on page 2637](#)

### **BGP Overview**

---

- [Understanding BGP on page 2638](#)
- [BGP Routes Overview on page 2640](#)
- [BGP Messages Overview on page 2641](#)



## Understanding BGP

BGP is an exterior gateway protocol (EGP) that is used to exchange routing information among routers in different autonomous systems (ASs). BGP routing information includes the complete route to each destination. BGP uses the routing information to maintain a database of network reachability information, which it exchanges with other BGP systems. BGP uses the network reachability information to construct a graph of AS connectivity, which enables BGP to remove routing loops and enforce policy decisions at the AS level.

Multiprotocol BGP (MBGP) extensions enable BGP to support IP version 6 (IPv6). MBGP defines the attributes MP\_REACH\_NLRI and MP\_UNREACH\_NLRI, which are used to carry IPv6 reachability information. Network layer reachability information (NLRI) update messages carry IPv6 address prefixes of feasible routes.

BGP allows for policy-based routing. You can use routing policies to choose among multiple paths to a destination and to control the redistribution of routing information.

BGP uses TCP as its transport protocol, using port 179 for establishing connections. Running over a reliable transport protocol eliminates the need for BGP to implement update fragmentation, retransmission, acknowledgment, and sequencing.

The Junos OS routing protocol software supports BGP version 4. This version of BGP adds support for Classless Interdomain Routing (CIDR), which eliminates the concept of network classes. Instead of assuming which bits of an address represent the network by looking at the first octet, CIDR allows you to explicitly specify the number of bits in the network address, thus providing a means to decrease the size of the routing tables. BGP version 4 also supports aggregation of routes, including the aggregation of AS paths.

This section discusses the following topics:

- [Autonomous Systems on page 2638](#)
- [AS Paths and Attributes on page 2638](#)
- [External and Internal BGP on page 2639](#)
- [Multiple Instances of BGP on page 2639](#)

---

### Autonomous Systems

An *autonomous system* (AS) is a set of routers that are under a single technical administration and normally use a single interior gateway protocol and a common set of metrics to propagate routing information within the set of routers. To other ASs, an AS appears to have a single, coherent interior routing plan and presents a consistent picture of what destinations are reachable through it.

---

### AS Paths and Attributes

The routing information that BGP systems exchange includes the complete route to each destination, as well as additional information about the route. The route to each destination is called the *AS path*, and the additional route information is included in *path attributes*. BGP uses the AS path and the path attributes to completely determine the network topology. Once BGP understands the topology, it can detect and eliminate




routing loops and select among groups of routes to enforce administrative preferences and routing policy decisions.

### External and Internal BGP

BGP supports two types of exchanges of routing information: exchanges among different ASs and exchanges within a single AS. When used among ASs, BGP is called *external BGP* (EBGP) and BGP sessions perform *inter-AS routing*. When used within an AS, BGP is called *internal BGP* (IBGP) and BGP sessions perform *intra-AS routing*. [Figure 49 on page 2639](#) illustrates ASs, IBGP, and EBGP.

Figure 49: ASs, EBGP, and IBGP

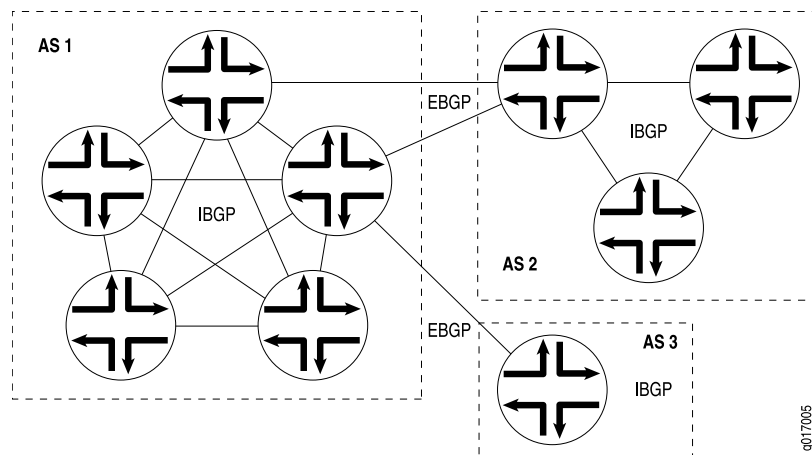

A BGP system shares network reachability information with adjacent BGP systems, which are referred to as *neighbors* or *peers*.

BGP systems are arranged into *groups*. In an IBGP group, all peers in the group—called *internal peers*—are in the same AS. Internal peers can be anywhere in the local AS and do not have to be directly connected to one another. Internal groups use routes from an IGP to resolve forwarding addresses. They also propagate external routes among all other internal routers running IBGP, computing the next hop by taking the BGP next hop received with the route and resolving it using information from one of the interior gateway protocols.

In an EBGP group, the peers in the group—called *external peers*—are in different ASs and normally share a subnet. In an external group, the next hop is computed with respect to the interface that is shared between the external peer and the local router.

### Multiple Instances of BGP

You can configure multiple instances of BGP at the following hierarchy levels:

- [edit routing-instances *routing-instance-name* protocols]
- [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols]

Multiple instances of BGP are primarily used for Layer 3 VPN support.



IGP peers and external BGP (EBGP) peers (both nonmultihop and multihop) are all supported for routing instances. BGP peering is established over one of the interfaces configured under the **routing-instances** hierarchy.



**NOTE:** When a BGP neighbor sends BGP messages to the local routing device, the incoming interface on which these messages are received must be configured in the same routing instance that the BGP neighbor configuration exists in. This is true for neighbors that are a single hop away or multiple hops away.

Routes learned from the BGP peer are added to the **instance-name.inet.0** table by default. You can configure import and export policies to control the flow of information into and out of the instance routing table.

For Layer 3 VPN support, configure BGP on the provider edge (PE) router to receive routes from the customer edge (CE) router and to send the instances' routes to the CE router if necessary. You can use multiple instances of BGP to maintain separate per-site forwarding tables for keeping VPN traffic separate on the PE router.

You can configure import and export policies that allow the service provider to control and rate-limit traffic to and from the customer.

You can configure an EBGP multihop session for a VRF routing instance. Also, you can set up the EBGP peer between the PE and CE routers by using the loopback address of the CE router instead of the interface addresses.

- Related Documentation**
- [BGP Routes Overview on page 2640](#)
  - [BGP Messages Overview on page 2641](#)

## BGP Routes Overview

A BGP route is a destination, described as an IP address prefix, and information that describes the path to the destination.

The following information describes the path:

- AS path, which is a list of numbers of the ASs that a route passes through to reach the local router. The first number in the path is that of the last AS in the path—the AS closest to the local router. The last number in the path is the AS farthest from the local router, which is generally the origin of the path.
- Path attributes, which contain additional information about the AS path that is used in routing policy.

BGP peers advertise routes to each other in update messages.

BGP stores its routes in the Junos OS routing table (**inet.0**). The routing table stores the following information about BGP routes:

- Routing information learned from update messages received from peers



- Local routing information that BGP applies to routes because of local policies
- Information that BGP advertises to BGP peers in update messages

For each prefix in the routing table, the routing protocol process selects a single best path, called the active path. Unless you configure BGP to advertise multiple paths to the same destination, BGP advertises only the active path.

The BGP router that first advertises a route assigns it one of the following values to identify its origin. During route selection, the lowest origin value is preferred.

- **0**—The router originally learned the route through an IGP (OSPF, IS-IS, or a static route).
- **1**—The router originally learned the route through an EGP (most likely BGP).
- **2**—The route's origin is unknown.

**Related  
Documentation**

- [Understanding BGP Path Selection on page 2827](#)
- [Example: Advertising Multiple Paths in BGP on page 2875](#)

## BGP Messages Overview

All BGP messages have the same fixed-size header, which contains a marker field that is used for both synchronization and authentication, a length field that indicates the length of the packet, and a type field that indicates the message type (for example, open, update, notification, keepalive, and so on).

This section discusses the following topics:

- [Open Messages on page 2641](#)
- [Update Messages on page 2642](#)
- [Keepalive Messages on page 2642](#)
- [Notification Messages on page 2642](#)

### Open Messages

After a TCP connection is established between two BGP systems, they exchange BGP open messages to create a BGP connection between them. Once the connection is established, the two systems can exchange BGP messages and data traffic.

Open messages consist of the BGP header plus the following fields:

- **Version**—The current BGP version number is 4.
- **Local AS number**—You configure this by including the **autonomous-system** statement at the **[edit routing-options]** or **[edit logical-systems *logical-system-name* routing-options]** hierarchy level.
- **Hold time**—Proposed hold-time value. You configure the local hold time with the BGP **hold-time** statement.
- **BGP identifier**—IP address of the BGP system. This address is determined when the system starts and is the same for every local interface and every BGP peer. You can



configure the BGP identifier by including the **router-id** statement at the **[edit routing-options]** or **[edit logical-systems *logical-system-name* routing-options]** hierarchy level. By default, BGP uses the IP address of the first interface it finds in the router.

- Parameter field length and the parameter itself—These are optional fields.

---

### Update Messages

BGP systems send update messages to exchange network reachability information. BGP systems use this information to construct a graph that describes the relationships among all known ASs.

Update messages consist of the BGP header plus the following optional fields:

- Unfeasible routes length—Length of the withdrawn routes field
- Withdrawn routes—IP address prefixes for the routes being withdrawn from service because they are no longer deemed reachable
- Total path attribute length—Length of the path attributes field; it lists the path attributes for a feasible route to a destination
- Path attributes—Properties of the routes, including the path origin, the multiple exit discriminator (MED), the originating system's preference for the route, and information about aggregation, communities, confederations, and route reflection
- Network layer reachability information (NLRI)—IP address prefixes of feasible routes being advertised in the update message

---

### Keepalive Messages

BGP systems exchange keepalive messages to determine whether a link or host has failed or is no longer available. Keepalive messages are exchanged often enough so that the hold timer does not expire. These messages consist only of the BGP header.

---

### Notification Messages

BGP systems send notification messages when an error condition is detected. After the message is sent, the BGP session and the TCP connection between the BGP systems are closed. Notification messages consist of the BGP header plus the error code and subcode, and data that describes the error.

#### Related Documentation

- [Understanding BGP on page 2638](#)
- [BGP Routes Overview on page 2640](#)



## CHAPTER 32

# Configuration

- [Basic BGP Configuration on page 2643](#)
- [BGP Path Attribute Configuration on page 2688](#)
- [BGP Policy Configuration on page 2799](#)
- [BGP BFD Configuration on page 2844](#)
- [BGP Load Balancing Configuration on page 2858](#)
- [IBGP Scaling Configuration on page 2900](#)
- [BGP Security Configuration on page 2924](#)
- [BGP Flap Configuration on page 2945](#)
- [BGP Monitoring Configuration on page 2966](#)
- [Configuration Statements on page 2973](#)

### Basic BGP Configuration

---

- [Examples: Configuring External BGP Peering on page 2643](#)
- [Examples: Configuring Internal BGP Peering on page 2666](#)

### Examples: Configuring External BGP Peering

- [Understanding External BGP Peering Sessions on page 2643](#)
- [Example: Configuring External BGP Point-to-Point Peer Sessions on page 2644](#)
- [Example: Configuring External BGP on Logical Systems with IPv6 Interfaces on page 2651](#)


### Understanding External BGP Peering Sessions

---

To establish point-to-point connections between peer autonomous systems (ASs), you configure a BGP session on each interface of a point-to-point link. Generally, such sessions are made at network exit points with neighboring hosts outside the AS. [Figure 50 on page 2644](#) shows an example of a BGP peering session.



Figure 50: BGP Peering Session

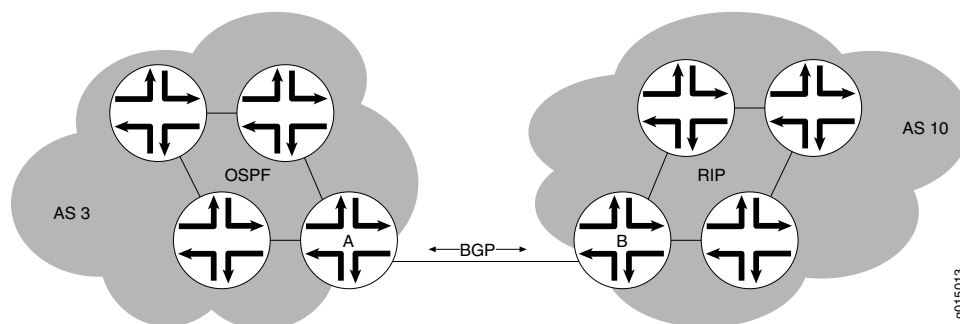

In [Figure 50 on page 2644](#), Router A is a gateway router for AS 3, and Router B is a gateway router for AS 10. For traffic internal to either AS, an interior gateway protocol (IGP) is used (OSPF, for instance). To route traffic between peer ASs, a BGP session is used.

You arrange BGP routing devices into groups of peers. Different peer groups can have different group types, AS numbers, and route reflector cluster identifiers.

To define a BGP group that recognizes only the specified BGP systems as peers, statically configure all the system's peers by including one or more **neighbor** statements. The peer neighbor's address can be either an IPv6 or IPv4 address.

As the number of external BGP (EBGP) groups increases, the ability to support a large number of BGP sessions might become a scaling issue. The preferred way to configure a large number of BGP neighbors is to configure a few groups consisting of multiple neighbors per group. Supporting fewer EBGP groups generally scales better than supporting a large number of EBGP groups. This becomes more evident in the case of hundreds of EBGP groups when compared with a few EBGP groups with multiple peers in each group.

After the BGP peers are established, BGP routes are not automatically advertised by the BGP peers. At each BGP-enabled device, policy configuration is required to export the local, static, or IGP-learned routes into the BGP RIB and then advertise them as BGP routes to the other peers. BGP's advertisement policy, by default, does not advertise any non-BGP routes (such as local routes) to peers.

### Example: Configuring External BGP Point-to-Point Peer Sessions

This example shows how to configure BGP point-to-point peer sessions.

- [Requirements on page 2644](#)
- [Overview on page 2645](#)
- [Configuration on page 2645](#)
- [Verification on page 2647](#)

#### Requirements


Before you begin, if the default BGP policy is not adequate for your network, configure routing policies to filter incoming BGP routes and to advertise BGP routes.



### Overview

Figure 51 on page 2645 shows a network with BGP peer sessions. In the sample network, Device E in AS 17 has BGP peer sessions to a group of peers called **external-peers**. Peers A, B, and C reside in AS 22 and have IP addresses 10.10.10.2, 10.10.10.6, and 10.10.10.10. Peer D resides in AS 79, at IP address 10.21.7.2. This example shows the configuration on Device E.

Figure 51: Typical Network with BGP Peer Sessions

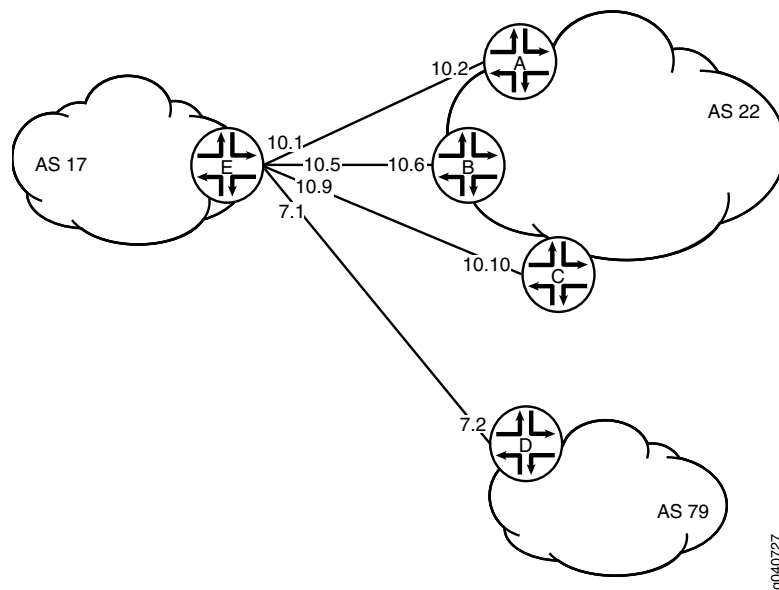

### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set interfaces ge-1/2/0 unit 0 description to-A
set interfaces ge-1/2/0 unit 0 family inet address 10.10.10.1/30
set interfaces ge-0/0/1 unit 5 description to-B
set interfaces ge-0/0/1 unit 5 family inet address 10.10.10.5/30
set interfaces ge-0/1/0 unit 9 description to-C
set interfaces ge-0/1/0 unit 9 family inet address 10.10.10.9/30
set interfaces ge-1/2/1 unit 21 description to-D
set interfaces ge-1/2/1 unit 21 family inet address 10.21.7.1/30
set protocols bgp group external-peers type external
set protocols bgp group external-peers peer-as 22
set protocols bgp group external-peers neighbor 10.10.10.2
set protocols bgp group external-peers neighbor 10.10.10.6
set protocols bgp group external-peers neighbor 10.10.10.10
set protocols bgp group external-peers neighbor 10.21.7.2 peer-as 79
set routing-options autonomous-system 17
```



**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure the BGP peer sessions:

1. Configure the interfaces to Peers A, B, C, and D.

```
[edit interfaces]
user@E# set ge-1/2/0 unit 0 description to-A
user@E# set ge-1/2/0 unit 0 family inet address 10.10.10.1/30
user@E# set ge-0/0/1 unit 5 description to-B
user@E# set ge-0/0/1 unit 5 family inet address 10.10.10.5/30
user@E# set ge-0/1/0 unit 9 description to-C
user@E# set ge-0/1/0 unit 9 family inet address 10.10.10.9/30
user@E# set ge-1/2/1 unit 21 description to-D
user@E# set ge-1/2/1 unit 21 family inet address 10.21.7.1/30
```

2. Set the autonomous system (AS) number.

```
[edit routing-options]
user@E# set autonomous-system 17
```

3. Create the BGP group, and add the external neighbor addresses.

```
[edit protocols bgp group external-peers]
user@E# set neighbor 10.10.10.2
user@E# set neighbor 10.10.10.6
user@E# set neighbor 10.10.10.10
```

4. Specify the autonomous system (AS) number of the external AS.

```
[edit protocols bgp group external-peers]
user@E# set peer-as 22
```

5. Add Peer D, and set the AS number at the individual neighbor level.

The neighbor configuration overrides the group configuration. So, while **peer-as 22** is set for all the other neighbors in the group, **peer-as 79** is set for neighbor 10.21.7.2.

```
[edit protocols bgp group external-peers]
user@E# set neighbor 10.21.7.2 peer-as 79
```

6. Set the peer type to external BGP (EBGP).

```
[edit protocols bgp group external-peers]
user@E# set type external
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@E# show interfaces
ge-1/2/0 {
  unit 0 {
    description to-A;
    family inet {
      address 10.10.10.1/30;
```



```

    }
  }
}
ge-0/0/1 {
  unit 5 {
    description to-B;
    family inet {
      address 10.10.10.5/30;
    }
  }
}
ge-0/1/0 {
  unit 9 {
    description to-C;
    family inet {
      address 10.10.10.9/30;
    }
  }
}
ge-1/2/1 {
  unit 21 {
    description to-D;
    family inet {
      address 10.21.7.1/30;
    }
  }
}

[edit]
user@E# show protocols
bgp {
  group external-peers {
    type external;
    peer-as 22;
    neighbor 10.10.10.2;
    neighbor 10.10.10.6;
    neighbor 10.10.10.10;
    neighbor 10.21.7.2 {
      peer-as 79;
    }
  }
}

[edit]
user@E# show routing-options
autonomous-system 17;

```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.

- [Verifying BGP Neighbors on page 2648](#)
- [Verifying BGP Groups on page 2650](#)
- [Verifying BGP Summary Information on page 2650](#)



**Verifying BGP Neighbors**

**Purpose** Verify that BGP is running on configured interfaces and that the BGP session is active for each neighbor address.

**Action** From operational mode, run the **show bgp neighbor** command.

```

user@E> show bgp neighbor
Peer: 10.10.10.2+179 AS 22      Local: 10.10.10.1+65406 AS 17
  Type: External  State: Established  Flags: <Sync>
  Last State: OpenConfirm  Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference PeerAS Refresh>
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.10.10.2      Local ID: 10.10.10.1      Active Holdtime: 90
  Keepalive Interval: 30      Peer index: 0
  BFD: disabled, down
  Local Interface: ge-1/2/0.0
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 120
  Stale routes from peer are kept for: 300
  Restart time requested by this peer: 120
  NLRI that peer supports restart for: inet-unicast
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 22)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:          0
    Received prefixes:        0
    Accepted prefixes:        0
    Suppressed due to damping: 0
    Advertised prefixes:      0
  Last traffic (seconds): Received 10   Sent 6   Checked 1
  Input messages: Total 8522   Updates 1   Refreshes 0   Octets 161922
  Output messages: Total 8433   Updates 0   Refreshes 0   Octets 160290
  Output Queue[0]: 0

Peer: 10.10.10.6+54781 AS 22   Local: 10.10.10.5+179 AS 17
  Type: External  State: Established  Flags: <Sync>
  Last State: OpenConfirm  Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference PeerAS Refresh>
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.10.10.6      Local ID: 10.10.10.1      Active Holdtime: 90
  Keepalive Interval: 30      Peer index: 1
  BFD: disabled, down
  Local Interface: ge-0/0/1.5
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)

```



```

Restart time configured on the peer: 120
Stale routes from peer are kept for: 300
Restart time requested by this peer: 120
NLRI that peer supports restart for: inet-unicast
NLRI that restart is negotiated for: inet-unicast
NLRI of received end-of-rib markers: inet-unicast
NLRI of all end-of-rib markers sent: inet-unicast
Peer supports 4 byte AS extension (peer-as 22)
Peer does not support Addpath
Table inet.0 Bit: 10000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:          0
  Received prefixes:        0
  Accepted prefixes:        0
  Suppressed due to damping: 0
  Advertised prefixes:      0
Last traffic (seconds): Received 12   Sent 6   Checked 33
Input messages: Total 8527   Updates 1   Refreshes 0   Octets 162057
Output messages: Total 8430   Updates 0   Refreshes 0   Octets 160233
Output Queue[0]: 0

Peer: 10.10.10.10+55012 AS 22 Local: 10.10.10.9+179 AS 17
Type: External State: Established Flags: <Sync>
Last State: OpenConfirm Last Event: RecvKeepAlive
Last Error: None
Options: <Preference PeerAS Refresh>
Holdtime: 90 Preference: 170
Number of flaps: 0
Peer ID: 10.10.10.10 Local ID: 10.10.10.1 Active Holdtime: 90
Keepalive Interval: 30 Peer index: 2
BFD: disabled, down
Local Interface: fe-0/1/0.9
NLRI for restart configured on peer: inet-unicast
NLRI advertised by peer: inet-unicast
NLRI for this session: inet-unicast
Peer supports Refresh capability (2)
Restart time configured on the peer: 120
Stale routes from peer are kept for: 300
Restart time requested by this peer: 120
NLRI that peer supports restart for: inet-unicast
NLRI that restart is negotiated for: inet-unicast
NLRI of received end-of-rib markers: inet-unicast
NLRI of all end-of-rib markers sent: inet-unicast
Peer supports 4 byte AS extension (peer-as 22)
Peer does not support Addpath
Table inet.0 Bit: 10000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:          0
  Received prefixes:        0
  Accepted prefixes:        0
  Suppressed due to damping: 0
  Advertised prefixes:      0
Last traffic (seconds): Received 15   Sent 6   Checked 37
Input messages: Total 8527   Updates 1   Refreshes 0   Octets 162057
Output messages: Total 8429   Updates 0   Refreshes 0   Octets 160214
Output Queue[0]: 0

Peer: 10.21.7.2+61867 AS 79 Local: 10.21.7.1+179 AS 17
Type: External State: Established Flags: <ImportEval Sync>

```



```

Last State: OpenConfirm   Last Event: RecvKeepAlive
Last Error: None
Options: <Preference PeerAS Refresh>
Holdtime: 90 Preference: 170
Number of flaps: 0
Peer ID: 10.21.7.2          Local ID: 10.10.10.1      Active Holdtime: 90
Keepalive Interval: 30      Peer index: 3
BFD: disabled, down
Local Interface: ge-1/2/1.21
NLRI for restart configured on peer: inet-unicast
NLRI advertised by peer: inet-unicast
NLRI for this session: inet-unicast
Peer supports Refresh capability (2)
Restart time configured on the peer: 120
Stale routes from peer are kept for: 300
Restart time requested by this peer: 120
NLRI that peer supports restart for: inet-unicast
NLRI that restart is negotiated for: inet-unicast
NLRI of received end-of-rib markers: inet-unicast
NLRI of all end-of-rib markers sent: inet-unicast
Peer supports 4 byte AS extension (peer-as 79)
Peer does not support Addpath
Table inet.0 Bit: 10000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:          0
  Received prefixes:        0
  Accepted prefixes:        0
  Suppressed due to damping: 0
  Advertised prefixes:      0
Last traffic (seconds): Received 28   Sent 24   Checked 47
Input messages: Total 8521   Updates 1   Refreshes 0   Octets 161943
Output messages: Total 8427   Updates 0   Refreshes 0   Octets 160176
Output Queue[0]: 0

```

### Verifying BGP Groups

**Purpose** Verify that the BGP groups are configured correctly.

**Action** From operational mode, run the **show bgp group** command.

```

user@E> show bgp group
Group Type: External                      Local AS: 17
  Name: external-peers   Index: 0         Flags: <>
  Holdtime: 0
  Total peers: 4         Established: 4
  10.10.10.2+179
  10.10.10.6+54781
  10.10.10.10+55012
  10.21.7.2+61867
  inet.0: 0/0/0/0

Groups: 1   Peers: 4   External: 4   Internal: 0   Down peers: 0   Flaps: 0
Table      Tot Paths  Act Paths  Suppressed  History  Damp State  Pending
inet.0     0          0          0           0        0        0        0

```

### Verifying BGP Summary Information

**Purpose** Verify that the BGP configuration is correct.



**Action** From operational mode, run the **show bgp summary** command.

```
user@E> show bgp summary
Groups: 1 Peers: 4 Down peers: 0
Table          Tot Paths  Act Paths Suppressed  History  Damp State   Pending
inet.0          0          0          0          0          0          0          0
Peer           AS           InPkt   OutPkt   OutQ   Flaps  Last Up/Dwn
State|#Active/Received/Accepted/Damped...
10.10.10.2      22          8559     8470      0        0 2d 16:12:56
0/0/0/0         0/0/0/0
10.10.10.6      22          8566     8468      0        0 2d 16:12:12
0/0/0/0         0/0/0/0
10.10.10.10     22          8565     8466      0        0 2d 16:11:31
0/0/0/0         0/0/0/0
10.21.7.2       79          8560     8465      0        0 2d 16:10:58
0/0/0/0         0/0/0/0
```

### Example: Configuring External BGP on Logical Systems with IPv6 Interfaces

This example shows how to configure external BGP (EBGP) point-to-point peer sessions on logical systems with IPv6 interfaces.

- [Requirements on page 2651](#)
- [Overview on page 2651](#)
- [Configuration on page 2652](#)
- [Verification on page 2661](#)

#### Requirements

In this example, no special configuration beyond device initialization is required.

#### Overview

Junos OS supports EBGP peer sessions by means of IPv6 addresses. An IPv6 peer session can be configured when an IPv6 address is specified in the **neighbor** statement. This example uses EUI-64 to generate IPv6 addresses that are automatically applied to the interfaces. An EUI-64 address is an IPv6 address that uses the IEEE EUI-64 format for the interface identifier portion of the address (the last 64 bits).



**NOTE:** Alternatively, you can configure EBGP sessions using manually assigned 128-bit IPv6 addresses.

If you use 128-bit link-local addresses for the interfaces, you must include the **local-interface** statement. This statement is valid only for 128-bit IPv6 link-local addresses and is mandatory for configuring an IPv6 EBGP link-local peer session.

Configuring EBGP peering using link-local addresses is only applicable for directly connected interfaces. There is no support for multihop peering.

After your interfaces are up, you can use the **show interfaces terse** command to view the EUI-64-generated IPv6 addresses on the interfaces. You must use these generated




addresses in the BGP **neighbor** statements. This example demonstrates the full end-to-end procedure.

In this example, Frame Relay interface encapsulation is applied to the logical tunnel (lt) interfaces. This is a requirement because only Frame Relay encapsulation is supported when IPv6 addresses are configured on the lt interfaces.

Figure 52 on page 2652 shows a network with BGP peer sessions. In the sample network, Router R1 has five logical systems configured. Device E in autonomous system (AS) 17 has BGP peer sessions to a group of peers called **external-peers**. Peers A, B, and C reside in AS 22. This example shows the step-by-step configuration on Logical System A and Logical System E.

Figure 52: Typical Network with BGP Peer Sessions

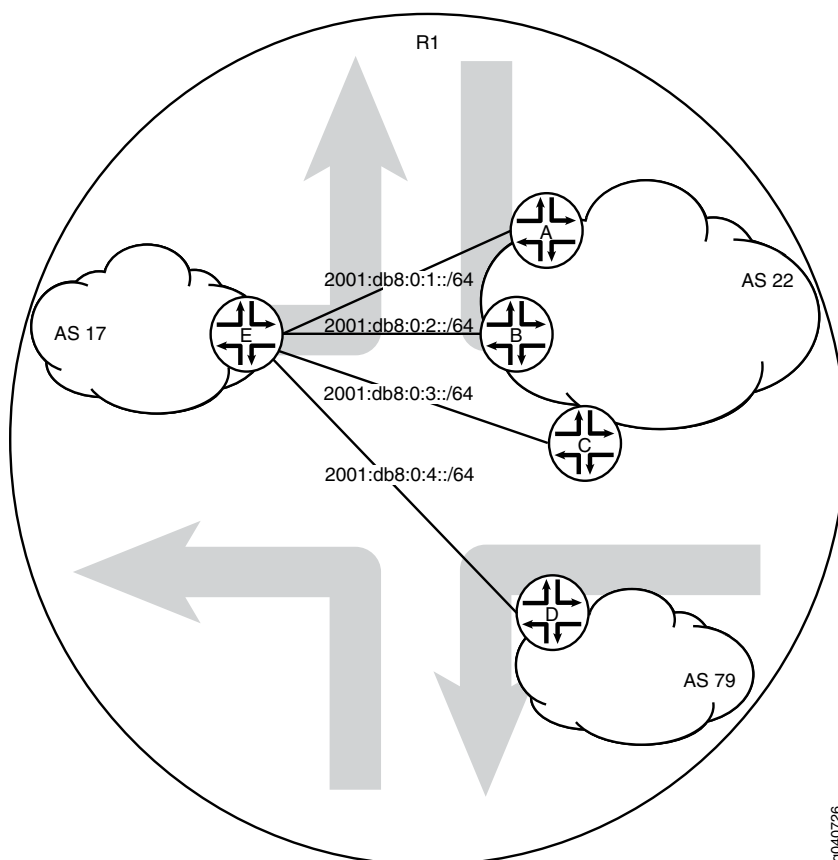

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

#### Device A

```
set logical-systems A interfaces lt-0/1/0 unit 1 description to-E
set logical-systems A interfaces lt-0/1/0 unit 1 encapsulation frame-relay
set logical-systems A interfaces lt-0/1/0 unit 1 dlci 1
```



```

set logical-systems A interfaces lt-0/1/0 unit 1 peer-unit 25
set logical-systems A interfaces lt-0/1/0 unit 1 family inet6 address 2001:db8:0:1::/64
  eui-64
set logical-systems A interfaces lo0 unit 1 family inet6 address 2001:db8::1/128
set logical-systems A protocols bgp group external-peers type external
set logical-systems A protocols bgp group external-peers peer-as 17
set logical-systems A protocols bgp group external-peers neighbor
  2001:db8:0:1:2a0:a502:0:19da
set logical-systems A routing-options router-id 1.1.1.1
set logical-systems A routing-options autonomous-system 22

```

**Device B**

```

set logical-systems B interfaces lt-0/1/0 unit 6 description to-E
set logical-systems B interfaces lt-0/1/0 unit 6 encapsulation frame-relay
set logical-systems B interfaces lt-0/1/0 unit 6 dlci 6
set logical-systems B interfaces lt-0/1/0 unit 6 peer-unit 5
set logical-systems B interfaces lt-0/1/0 unit 6 family inet6 address 2001:db8:0:2::/64
  eui-64
set logical-systems B interfaces lo0 unit 2 family inet6 address 2001:db8::2/128
set logical-systems B protocols bgp group external-peers type external
set logical-systems B protocols bgp group external-peers peer-as 17
set logical-systems B protocols bgp group external-peers neighbor
  2001:db8:0:2:2a0:a502:0:5da
set logical-systems B routing-options router-id 2.2.2.2
set logical-systems B routing-options autonomous-system 22

```

**Device C**

```

set logical-systems C interfaces lt-0/1/0 unit 10 description to-E
set logical-systems C interfaces lt-0/1/0 unit 10 encapsulation frame-relay
set logical-systems C interfaces lt-0/1/0 unit 10 dlci 10
set logical-systems C interfaces lt-0/1/0 unit 10 peer-unit 9
set logical-systems C interfaces lt-0/1/0 unit 10 family inet6 address 2001:db8:0:3::/64
  eui-64
set logical-systems C interfaces lo0 unit 3 family inet6 address 2001:db8::3/128
set logical-systems C protocols bgp group external-peers type external
set logical-systems C protocols bgp group external-peers peer-as 17
set logical-systems C protocols bgp group external-peers neighbor
  2001:db8:0:3:2a0:a502:0:9da
set logical-systems C routing-options router-id 3.3.3.3
set logical-systems C routing-options autonomous-system 22

```

**Device D**

```

set logical-systems D interfaces lt-0/1/0 unit 7 description to-E
set logical-systems D interfaces lt-0/1/0 unit 7 encapsulation frame-relay
set logical-systems D interfaces lt-0/1/0 unit 7 dlci 7
set logical-systems D interfaces lt-0/1/0 unit 7 peer-unit 21
set logical-systems D interfaces lt-0/1/0 unit 7 family inet6 address 2001:db8:0:4::/64
  eui-64
set logical-systems D interfaces lo0 unit 4 family inet6 address 2001:db8::4/128
set logical-systems D protocols bgp group external-peers type external
set logical-systems D protocols bgp group external-peers peer-as 17
set logical-systems D protocols bgp group external-peers neighbor
  2001:db8:0:4:2a0:a502:0:15da
set logical-systems D routing-options router-id 4.4.4.4
set logical-systems D routing-options autonomous-system 79

```

**Device E**

```

set logical-systems E interfaces lt-0/1/0 unit 5 description to-B
set logical-systems E interfaces lt-0/1/0 unit 5 encapsulation frame-relay

```



```

set logical-systems E interfaces lt-0/1/0 unit 5 dlci 6
set logical-systems E interfaces lt-0/1/0 unit 5 peer-unit 6
set logical-systems E interfaces lt-0/1/0 unit 5 family inet6 address 2001:db8:0:2::/64
    eui-64
set logical-systems E interfaces lt-0/1/0 unit 9 description to-C
set logical-systems E interfaces lt-0/1/0 unit 9 encapsulation frame-relay
set logical-systems E interfaces lt-0/1/0 unit 9 dlci 10
set logical-systems E interfaces lt-0/1/0 unit 9 peer-unit 10
set logical-systems E interfaces lt-0/1/0 unit 9 family inet6 address 2001:db8:0:3::/64
    eui-64
set logical-systems E interfaces lt-0/1/0 unit 21 description to-D
set logical-systems E interfaces lt-0/1/0 unit 21 encapsulation frame-relay
set logical-systems E interfaces lt-0/1/0 unit 21 dlci 7
set logical-systems E interfaces lt-0/1/0 unit 21 peer-unit 7
set logical-systems E interfaces lt-0/1/0 unit 21 family inet6 address 2001:db8:0:4::/64
    eui-64
set logical-systems E interfaces lt-0/1/0 unit 25 description to-A
set logical-systems E interfaces lt-0/1/0 unit 25 encapsulation frame-relay
set logical-systems E interfaces lt-0/1/0 unit 25 dlci 1
set logical-systems E interfaces lt-0/1/0 unit 25 peer-unit 1
set logical-systems E interfaces lt-0/1/0 unit 25 family inet6 address 2001:db8:0:1::/64
    eui-64
set logical-systems E interfaces lo0 unit 5 family inet6 address 2001:db8::5/128
set logical-systems E protocols bgp group external-peers type external
set logical-systems E protocols bgp group external-peers peer-as 22
set logical-systems E protocols bgp group external-peers neighbor
    2001:db8:0:1:2a0:a502:0:1da
set logical-systems E protocols bgp group external-peers neighbor
    2001:db8:0:2:2a0:a502:0:6da
set logical-systems E protocols bgp group external-peers neighbor
    2001:db8:0:3:2a0:a502:0:ada
set logical-systems E protocols bgp group external-peers neighbor
    2001:db8:0:4:2a0:a502:0:7da peer-as 79
set logical-systems E routing-options router-id 5.5.5.5
set logical-systems E routing-options autonomous-system 17

```

#### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure the BGP peer sessions:

1. Run the **show interfaces terse** command to verify that the physical router has a logical tunnel (lt) interface.

```

user@R1> show interfaces terse
Interface           Admin Link Proto  Local          Remote
...
lt-0/1/0             up    up
...

```

2. On Logical System A, configure the interface encapsulation, peer-unit number, and DLCI to reach Logical System E.

```

user@R1> set cli logical-system A
Logical system: A
[edit]

```



```

user@R1:A> edit
Entering configuration mode
[edit]
user@R1:A# edit interfaces
[edit interfaces]
user@R1:A# set lt-0/1/0 unit 1 encapsulation frame-relay
user@R1:A# set lt-0/1/0 unit 1 dlci 1
user@R1:A# set lt-0/1/0 unit 1 peer-unit 25

```

3. On Logical System A, configure the network address for the link to Peer E, and configure a loopback interface.

```

[edit interfaces]
user@R1:A# set lt-0/1/0 unit 1 description to-E
user@R1:A# set lt-0/1/0 unit 1 family inet6 address 2001:db8:0:1::/64 eui-64
user@R1:A# set lo0 unit 1 family inet6 address 2001:db8::1/128

```

4. On Logical System E, configure the interface encapsulation, peer-unit number, and DLCI to reach Logical System A.

```

user@R1> set cli logical-system E
Logical system: E
[edit]
user@R1:E> edit
Entering configuration mode
[edit]
user@R1:E# edit interfaces
[edit interfaces]
user@R1:E# set lt-0/1/0 unit 25 encapsulation frame-relay
user@R1:E# set lt-0/1/0 unit 25 dlci 1
user@R1:E# set lt-0/1/0 unit 25 peer-unit 1

```

5. On Logical System E, configure the network address for the link to Peer A, and configure a loopback interface.

```

[edit interfaces]
user@R1:E# set lt-0/1/0 unit 25 description to-A
user@R1:E# set lt-0/1/0 unit 25 family inet6 address 2001:db8:0:1::/64 eui-64
user@R1:E# set lo0 unit 5 family inet6 address 2001:db8::5/128

```

6. Run the **show interfaces terse** command to see the IPv6 addresses that are generated by EUI-64.

The 2001 addresses are used in this example in the BGP **neighbor** statements.



**NOTE:** The fe80 addresses are link-local addresses and are not used in this example.

```

user@R1:A> show interfaces terse
Interface          Admin Link Proto  Local              Remote
Logical system: A

betsy@tp8:A> show interfaces terse
Interface          Admin Link Proto  Local              Remote
lt-0/1/0
lt-0/1/0.1          up    up    inet6    2001:db8:0:1:2a0:a502:0:1da/64

```



```

fe80::2a0:a502:0:1da/64
1o0
1o0.1                up    up    inet6  2001:db8::1
                                fe80::2a0:a50f:fc56:1da

user@R1:E> show interfaces terse
Interface           Admin Link Proto  Local              Remote
1t-0/1/0
1t-0/1/0.25         up    up    inet6  2001:db8:0:1:2a0:a502:0:19da/64
                                fe80::2a0:a502:0:19da/64
1o0
1o0.5                up    up    inet6  2001:db8::5
                                fe80::2a0:a50f:fc56:1da

```

7. Repeat the interface configuration on the other logical systems.

### Configuring the External BGP Sessions

#### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure the BGP peer sessions:

1. On Logical System A, create the BGP group, and add the external neighbor address.
 

```
[edit protocols bgp group external-peers]
user@R1:A# set neighbor 2001:db8:0:1:2a0:a502:0:19da
```
2. On Logical System E, create the BGP group, and add the external neighbor address.
 

```
[edit protocols bgp group external-peers]
user@R1:E# set neighbor 2001:db8:0:1:2a0:a502:0:1da
```
3. On Logical System A, specify the autonomous system (AS) number of the external AS.
 

```
[edit protocols bgp group external-peers]
user@R1:A# set peer-as 17
```
4. On Logical System E, specify the autonomous system (AS) number of the external AS.
 

```
[edit protocols bgp group external-peers]
user@R1:E# set peer-as 22
```
5. On Logical System A, set the peer type to EBGP.
 

```
[edit protocols bgp group external-peers]
user@R1:A# set type external
```
6. On Logical System E, set the peer type to EBGP.
 

```
[edit protocols bgp group external-peers]
user@R1:E# set type external
```
7. On Logical System A, set the autonomous system (AS) number and router ID.
 

```
[edit routing-options]
user@R1:A# set router-id 1.1.1.1
user@R1:A# set autonomous-system 22
```



8. On Logical System E, set the AS number and router ID.

```
[edit routing-options]
user@R1:E# set router-id 5.5.5.5
user@R1:E# set autonomous-system 17
```

9. Repeat these steps for Peers A, B, C, and D.

**Results** From configuration mode, confirm your configuration by entering the **show logical-systems** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@R1# show logical-systems
A {
  interfaces {
    lt-0/1/0 {
      unit 1 {
        description to-E;
        encapsulation frame-relay;
        dlci 1;
        peer-unit 25;
        family inet6 {
          address 2001:db8:0:1::/64 {
            eui-64;
          }
        }
      }
    }
  }
  lo0 {
    unit 1 {
      family inet6 {
        address 2001:db8::1/128;
      }
    }
  }
  protocols {
    bgp {
      group external-peers {
        type external;
        peer-as 17;
        neighbor 2001:db8:0:1:2a0:a502:0:19da;
      }
    }
    routing-options {
      router-id 1.1.1.1;
      autonomous-system 22;
    }
  }
}
B {
  interfaces {
    lt-0/1/0 {
      unit 6 {
        description to-E;
        encapsulation frame-relay;
```



```
        dlci 6;
        peer-unit 5;
        family inet6 {
            address 2001:db8:0:2::/64 {
                eui-64;
            }
        }
    }
}
lo0 {
    unit 2 {
        family inet6 {
            address 2001:db8::2/128;
        }
    }
}
}
protocols {
    bgp {
        group external-peers {
            type external;
            peer-as 17;
            neighbor 2001:db8:0:2:2a0:a502:0:5da;
        }
    }
    routing-options {
        router-id 2.2.2.2;
        autonomous-system 22;
    }
}
C {
    interfaces {
        lt-0/1/0 {
            unit 10 {
                description to-E;
                encapsulation frame-relay;
                dlci 10;
                peer-unit 9;
                family inet6 {
                    address 2001:db8:0:3::/64 {
                        eui-64;
                    }
                }
            }
        }
    }
    lo0 {
        unit 3 {
            family inet6 {
                address 2001:db8::3/128;
            }
        }
    }
}
}
protocols {
    bgp {
        group external-peers {
```



```

        type external;
        peer-as 17;
        neighbor 2001:db8:0:3:2a0:a502:0:9da;
    }
}
routing-options {
    router-id 3.3.3.3;
    autonomous-system 22;
}
D {
    interfaces {
        lt-0/1/0 {
            unit 7 {
                description to-E;
                encapsulation frame-relay;
                dlci 7;
                peer-unit 21;
                family inet6 {
                    address 2001:db8:0:4::/64 {
                        eui-64;
                    }
                }
            }
        }
    }
    lo0 {
        unit 4 {
            family inet6 {
                address 2001:db8::4/128;
            }
        }
    }
}
protocols {
    bgp {
        group external-peers {
            type external;
            peer-as 17;
            neighbor 2001:db8:0:4:2a0:a502:0:15da;
        }
    }
    routing-options {
        router-id 4.4.4.4;
        autonomous-system 79;
    }
}
E {
    interfaces {
        lt-0/1/0 {
            unit 5 {
                description to-B;
                encapsulation frame-relay;
                dlci 6;
                peer-unit 6;
                family inet6 {

```



```
        address 2001:db8:0:2::/64 {
            eui-64;
        }
    }
}
unit 9 {
    description to-C;
    encapsulation frame-relay;
    dlci 10;
    peer-unit 10;
    family inet6 {
        address 2001:db8:0:3::/64 {
            eui-64;
        }
    }
}
unit 21 {
    description to-D;
    encapsulation frame-relay;
    dlci 7;
    peer-unit 7;
    family inet6 {
        address 2001:db8:0:4::/64 {
            eui-64;
        }
    }
}
unit 25 {
    description to-A;
    encapsulation frame-relay;
    dlci 1;
    peer-unit 1;
    family inet6 {
        address 2001:db8:0:1::/64 {
            eui-64;
        }
    }
}
lo0 {
    unit 5 {
        family inet6 {
            address 2001:db8::5/128;
        }
    }
}
}
protocols {
    bgp {
        group external-peers {
            type external;
            peer-as 22;
            neighbor 2001:db8:0:1:2a0:a502:0:1da;
            neighbor 2001:db8:0:2:2a0:a502:0:6da;
            neighbor 2001:db8:0:3:2a0:a502:0:ada;
            neighbor 2001:db8:0:4:2a0:a502:0:7da {
```



```

        peer-as 79;
    }
}
}
routing-options {
    router-id 5.5.5.5;
    autonomous-system 17;
}
}

```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.

- [Verifying BGP Neighbors on page 2661](#)
- [Verifying BGP Groups on page 2664](#)
- [Verifying BGP Summary Information on page 2664](#)
- [Checking the Routing Table on page 2664](#)

### Verifying BGP Neighbors

**Purpose** Verify that BGP is running on configured interfaces and that the BGP session is active for each neighbor address.

**Action** From operational mode, run the **show bgp neighbor** command.

```

user@R1:E> show bgp neighbor
Peer: 2001:db8:0:1:2a0:a502:0:1da+54987 AS 22 Local:
2001:db8:0:1:2a0:a502:0:19da+179 AS 17
  Type: External   State: Established   Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: Open Message Error
  Options: <Preference PeerAS Refresh>
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Error: 'Open Message Error' Sent: 20 Recv: 0
  Peer ID: 1.1.1.1          Local ID: 5.5.5.5          Active Holdtime: 90
  Keepalive Interval: 30      Peer index: 0
  BFD: disabled, down
  Local Interface: lt-0/1/0.25
  NLRI for restart configured on peer: inet6-unicast
  NLRI advertised by peer: inet6-unicast
  NLRI for this session: inet6-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet6-unicast
  NLRI of received end-of-rib markers: inet6-unicast
  NLRI of all end-of-rib markers sent: inet6-unicast
  Peer supports 4 byte AS extension (peer-as 22)
  Peer does not support Addpath
  Table inet6.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync

```



```

Active prefixes:          0
Received prefixes:       0
Accepted prefixes:       0
Suppressed due to damping: 0
Advertised prefixes:     0
Last traffic (seconds): Received 7   Sent 18   Checked 81
Input messages:  Total 1611  Updates 1       Refreshes 0       Octets 30660
Output messages: Total 1594  Updates 0       Refreshes 0       Octets 30356
Output Queue[0]: 0

```

```

Peer: 2001:db8:0:2:2a0:a502:0:6da+179 AS 22 Local:
2001:db8:0:2:2a0:a502:0:5da+55502 AS 17
Type: External   State: Established   Flags: <Sync>
Last State: OpenConfirm   Last Event: RecvKeepAlive
Last Error: Open Message Error
Options: <Preference PeerAS Refresh>
Holdtime: 90 Preference: 170
Number of flaps: 0
Error: 'Open Message Error' Sent: 26 Recv: 0
Peer ID: 2.2.2.2      Local ID: 5.5.5.5      Active Holdtime: 90
Keepalive Interval: 30      Peer index: 2
BFD: disabled, down
Local Interface: lt-0/1/0.5
NLRI for restart configured on peer: inet6-unicast
NLRI advertised by peer: inet6-unicast
NLRI for this session: inet6-unicast
Peer supports Refresh capability (2)
Stale routes from peer are kept for: 300
Peer does not support Restarter functionality
NLRI that restart is negotiated for: inet6-unicast
NLRI of received end-of-rib markers: inet6-unicast
NLRI of all end-of-rib markers sent: inet6-unicast
Peer supports 4 byte AS extension (peer-as 22)
Peer does not support Addpath
Table inet6.0 Bit: 10000
RIB State: BGP restart is complete
Send state: in sync
Active prefixes:          0
Received prefixes:       0
Accepted prefixes:       0
Suppressed due to damping: 0
Advertised prefixes:     0
Last traffic (seconds): Received 15   Sent 8   Checked 8
Input messages:  Total 1610  Updates 1       Refreshes 0       Octets 30601
Output messages: Total 1645  Updates 0       Refreshes 0       Octets 32417
Output Queue[0]: 0

```

```

Peer: 2001:db8:0:3:2a0:a502:0:ada+55983 AS 22 Local:
2001:db8:0:3:2a0:a502:0:9da+179 AS 17
Type: External   State: Established   Flags: <Sync>
Last State: OpenConfirm   Last Event: RecvKeepAlive
Last Error: None
Options: <Preference PeerAS Refresh>
Holdtime: 90 Preference: 170
Number of flaps: 0
Peer ID: 3.3.3.3      Local ID: 5.5.5.5      Active Holdtime: 90
Keepalive Interval: 30      Peer index: 3
BFD: disabled, down
Local Interface: lt-0/1/0.9
NLRI for restart configured on peer: inet6-unicast
NLRI advertised by peer: inet6-unicast

```



```

NLRI for this session: inet6-unicast
Peer supports Refresh capability (2)
Stale routes from peer are kept for: 300
Peer does not support Restarter functionality
NLRI that restart is negotiated for: inet6-unicast
NLRI of received end-of-rib markers: inet6-unicast
NLRI of all end-of-rib markers sent: inet6-unicast
Peer supports 4 byte AS extension (peer-as 22)
Peer does not support Addpath
Table inet6.0 Bit: 10000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:          0
  Received prefixes:        0
  Accepted prefixes:        0
  Suppressed due to damping: 0
  Advertised prefixes:      0
Last traffic (seconds): Received 21   Sent 21   Checked 67
Input messages: Total 1610 Updates 1     Refreshes 0     Octets 30641
Output messages: Total 1587 Updates 0     Refreshes 0     Octets 30223
Output Queue[0]: 0

Peer: 2001:db8:0:4:2a0:a502:0:7da+49255 AS 79 Local:
2001:db8:0:4:2a0:a502:0:15da+179 AS 17
Type: External   State: Established   Flags: <Sync>
Last State: OpenConfirm   Last Event: RecvKeepAlive
Last Error: None
Options: <Preference PeerAS Refresh>
Holdtime: 90 Preference: 170
Number of flaps: 0
Peer ID: 4.4.4.4           Local ID: 5.5.5.5           Active Holdtime: 90
Keepalive Interval: 30     Peer index: 1
BFD: disabled, down
Local Interface: lt-0/1/0.21
NLRI for restart configured on peer: inet6-unicast
NLRI advertised by peer: inet6-unicast
NLRI for this session: inet6-unicast
Peer supports Refresh capability (2)
Stale routes from peer are kept for: 300
Peer does not support Restarter functionality
NLRI that restart is negotiated for: inet6-unicast
NLRI of received end-of-rib markers: inet6-unicast
NLRI of all end-of-rib markers sent: inet6-unicast
Peer supports 4 byte AS extension (peer-as 79)
Peer does not support Addpath
Table inet6.0 Bit: 10000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:          0
  Received prefixes:        0
  Accepted prefixes:        0
  Suppressed due to damping: 0
  Advertised prefixes:      0
Last traffic (seconds): Received 6     Sent 17   Checked 25
Input messages: Total 1615 Updates 1     Refreshes 0     Octets 30736
Output messages: Total 1593 Updates 0     Refreshes 0     Octets 30337
Output Queue[0]: 0

```

**Meaning** IPv6 unicast network layer reachability information (NLRI) is being exchanged between the neighbors.



**Verifying BGP Groups**

**Purpose** Verify that the BGP groups are configured correctly.

**Action** From operational mode, run the **show bgp group** command.

```
user@R1:~> show bgp group
Group Type: External                               Local AS: 17
  Name: external-peers  Index: 0                   Flags: <>
  Holdtime: 0
  Total peers: 4      Established: 4
  2001:db8:0:1:2a0:a502:0:1da+54987
  2001:db8:0:2:2a0:a502:0:6da+179
  2001:db8:0:3:2a0:a502:0:ada+55983
  2001:db8:0:4:2a0:a502:0:7da+49255
  inet6.0: 0/0/0/0

Groups: 1  Peers: 4   External: 4   Internal: 0   Down peers: 0   Flaps: 0
Table      Tot Paths  Act Paths  Suppressed  History  Damp State  Pending
inet6.0           0         0           0          0        0         0
inet6.2           0         0           0          0        0         0
```

**Meaning** The group type is external, and the group has four peers.

**Verifying BGP Summary Information**

**Purpose** Verify that the BGP that the peer relationships are established.

**Action** From operational mode, run the **show bgp summary** command.

```
user@R1:~> show bgp summary
Groups: 1 Peers: 4 Down peers: 0
Table      Tot Paths  Act Paths  Suppressed  History  Damp State  Pending
inet6.0           0         0           0          0        0         0
inet6.2           0         0           0          0        0         0
Peer      AS      InPkt    OutPkt    OutQ    Flaps  Last Up/Dwn
State|#Active/Received/Accepted/Damped...
2001:db8:0:1:2a0:a502:0:1da      22    1617    1600      0      0
  12:07:00 Estab1
    inet6.0: 0/0/0/0
2001:db8:0:2:2a0:a502:0:6da      22    1616    1651      0      0
  12:06:56 Estab1
    inet6.0: 0/0/0/0
2001:db8:0:3:2a0:a502:0:ada      22    1617    1594      0      0
  12:04:32 Estab1
    inet6.0: 0/0/0/0
2001:db8:0:4:2a0:a502:0:7da      79    1621    1599      0      0
  12:07:00 Estab1
    inet6.0: 0/0/0/0
```

**Meaning** The Down peers: 0 output shows that the BGP peers are in the established state.

**Checking the Routing Table**

**Purpose** Verify that the inet6.0 routing table is populated with local and direct routes.



**Action** From operational mode, run the **show route** command.

```

user@R1:E> show route
inet6.0: 15 destinations, 18 routes (15 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2001:db8::5/128    *[Direct/0] 12:41:18
                  > via lo0.5
2001:db8:0:1::/64  *[Direct/0] 14:40:01
                  > via lt-0/1/0.25
2001:db8:0:1:2a0:a502:0:19da/128
                  *[Local/0] 14:40:01
                  Local via lt-0/1/0.25
2001:db8:0:2::/64  *[Direct/0] 14:40:02
                  > via lt-0/1/0.5
2001:db8:0:2:2a0:a502:0:5da/128
                  *[Local/0] 14:40:02
                  Local via lt-0/1/0.5
2001:db8:0:3::/64  *[Direct/0] 14:40:02
                  > via lt-0/1/0.9
2001:db8:0:3:2a0:a502:0:9da/128
                  *[Local/0] 14:40:02
                  Local via lt-0/1/0.9
2001:db8:0:4::/64  *[Direct/0] 14:40:01
                  > via lt-0/1/0.21
2001:db8:0:4:2a0:a502:0:15da/128
                  *[Local/0] 14:40:01
                  Local via lt-0/1/0.21
fe80::/64         *[Direct/0] 14:40:02
                  > via lt-0/1/0.5
                  [Direct/0] 14:40:02
                  > via lt-0/1/0.9
                  [Direct/0] 14:40:01
                  > via lt-0/1/0.21
                  [Direct/0] 14:40:01
                  > via lt-0/1/0.25
fe80::2a0:a502:0:5da/128
                  *[Local/0] 14:40:02
                  Local via lt-0/1/0.5
fe80::2a0:a502:0:9da/128
                  *[Local/0] 14:40:02
                  Local via lt-0/1/0.9
fe80::2a0:a502:0:15da/128
                  *[Local/0] 14:40:01
                  Local via lt-0/1/0.21
fe80::2a0:a502:0:19da/128
                  *[Local/0] 14:40:01
                  Local via lt-0/1/0.25
fe80::2a0:a50f:fc56:1da/128
                  *[Direct/0] 12:41:18
                  > via lo0.5

```

**Meaning** The inet6.0 routing table contains local and direct routes. To populate the routing table with other types of routes, you must configure routing policies.

**Related Documentation**

- [Examples: Configuring Internal BGP Peering on page 2666](#)
- [BGP Configuration Overview](#)




## Examples: Configuring Internal BGP Peering

- [Understanding Internal BGP Peering Sessions on page 2666](#)
- [Example: Configuring Internal BGP Peer Sessions on page 2667](#)
- [Example: Configuring Internal BGP Peering Sessions on Logical Systems on page 2678](#)

### Understanding Internal BGP Peering Sessions

When two BGP-enabled devices are in the same autonomous system (AS), the BGP session is called an *internal* BGP session, or IBGP session. BGP uses the same message types on IBGP and external BGP (EBGP) sessions, but the rules for when to send each message and how to interpret each message differ slightly. For this reason, some people refer to IBGP and EBGP as two separate protocols.

Figure 53: Internal and External BGP

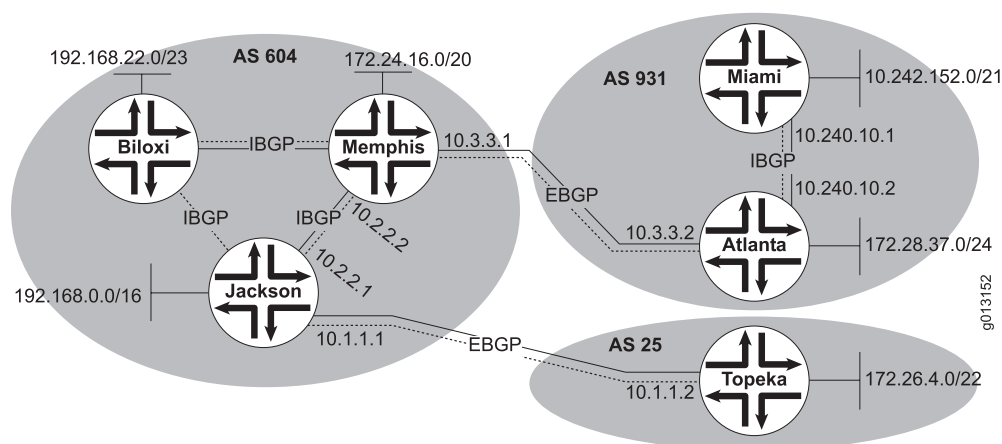

In [Figure 53 on page 2666](#), Device Jackson, Device Memphis, and Device Biloxi have IBGP peer sessions with each other. Likewise, Device Miami and Device Atlanta have IBGP peer sessions between each other.

The purpose of IBGP is to provide a means by which EBGP route advertisements can be forwarded throughout the network. In theory, to accomplish this task you could redistribute all of your EBGP routes into an interior gateway protocol (IGP), such as OSPF or IS-IS. This, however, is not recommended in a production environment because of the large number of EBGP routes in the Internet and because of the way that IGPs operate. In short, with that many routes the IGP churns or crashes.

Generally, the loopback interface (lo0) is used to establish connections between IBGP peers. The loopback interface is always up as long as the device is operating. If there is a route to the loopback address, the IBGP peering session stays up. If a physical interface address is used instead and that interface goes up and down, the IBGP peering session also goes up and down. Thus the loopback interface provides fault tolerance in case the physical interface or the link goes down, if the device has link redundancy.

While IBGP neighbors do not need to be directly connected, they do need to be fully meshed. In this case, fully meshed means that each device is logically connected to every



other device through neighbor peer relationships. The **neighbor** statement creates the mesh. Because of the full mesh requirement of IBGP, you must configure individual peering sessions between all IBGP devices in the AS. The full mesh need not be physical links. Rather, the configuration on each routing device must create a full mesh of peer sessions (using multiple **neighbor** statements).



**NOTE:** The requirement for a full mesh is waived if you configure a confederation or route reflection.

To understand the full-mesh requirement, consider that an IBGP-learned route cannot be readvertised to another IBGP peer. The reason for preventing the readvertisement of IBGP routes and requiring the full mesh is to avoid routing loops within an AS. The AS path attribute is the means by which BGP routing devices avoid loops. The path information is examined for the local AS number only when the route is received from an EBGP peer. Because the attribute is only modified across AS boundaries, this system works well. However, the fact that the attribute is only modified across AS boundaries presents an issue inside the AS. For example, suppose that routing devices A, B, and C are all in the same AS. Device A receives a route from an EBGP peer and sends the route to Device B, which installs it as the active route. The route is then sent to Device C, which installs it locally and sends it back to Device A. If Device A installs the route, a loop is formed within the AS. The routing devices are not able to detect the loop because the AS path attribute is not modified during these advertisements. Therefore, the BGP protocol designers decided that the only assurance of never forming a routing loop was to prevent an IBGP peer from advertising an IBGP-learned route within the AS. For route reachability, the IBGP peers are fully meshed.

IBGP supports multihop connections, so IBGP neighbors can be located anywhere within the AS and often do not share a link. A recursive route lookup resolves the loopback peering address to an IP forwarding next hop. The lookup service is provided by static routes or an IGP, such as OSPF.

### Example: Configuring Internal BGP Peer Sessions

This example shows how to configure internal BGP peer sessions.

- [Requirements on page 2667](#)
- [Overview on page 2667](#)
- [Configuration on page 2669](#)
- [Verification on page 2676](#)

#### **Requirements**

No special configuration beyond device initialization is required before you configure this example.

#### **Overview**

In this example, you configure internal BGP (IBGP) peer sessions. The loopback interface (lo0) is used to establish connections between IBGP peers. The loopback interface is always up as long as the device is operating. If there is a route to the loopback address,



the IBGP peer session stays up. If a physical interface address is used instead and that interface goes up and down, the IBGP peer session also goes up and down. Thus, if the device has link redundancy, the loopback interface provides fault tolerance in case the physical interface or one of the links goes down.

When a device peers with a remote device's loopback interface address, the local device expects BGP update messages to come from (be sourced by) the remote device's loopback interface address. The **local-address** statement enables you to specify the source information in BGP update messages. If you omit the **local-address** statement, the expected source of BGP update messages is based on the device's source address selection rules, which normally results in the egress interface address being the expected source of update messages. When this happens, the peer session is not established because a mismatch exists between the expected source address (the egress interface of the peer) and the actual source (the loopback interface of the peer). To make sure that the expected source address matches the actual source address, specify the loopback interface address in the **local-address** statement.

Because IBGP supports multihop connections, IBGP neighbors can be located anywhere within the autonomous system (AS) and often do not share a link. A recursive route lookup resolves the loopback peer address to an IP forwarding next hop. In this example, this service is provided by OSPF. Although interior gateway protocol (IGP) neighbors do not need to be directly connected, they do need to be fully meshed. In this case, fully meshed means that each device is logically connected to every other device through neighbor peer relationships. The **neighbor** statement creates the mesh.



**NOTE:** The requirement for a full mesh is waived if you configure a confederation or route reflection.

---


After the BGP peers are established, BGP routes are not automatically advertised by the BGP peers. At each BGP-enabled device, policy configuration is required to export the local, static, or IGP-learned routes into the BGP routing information base (RIB) and then advertise them as BGP routes to the other peers. BGP's advertisement policy, by default, does not advertise any non-BGP routes (such as local routes) to peers.

In the sample network, the devices in AS 17 are fully meshed in the group **internal-peers**. The devices have loopback addresses 192.168.6.5, 192.163.6.4, and 192.168.40.4.

Figure 54 on page 2669 shows a typical network with internal peer sessions.



Figure 54: Typical Network with IBGP Sessions

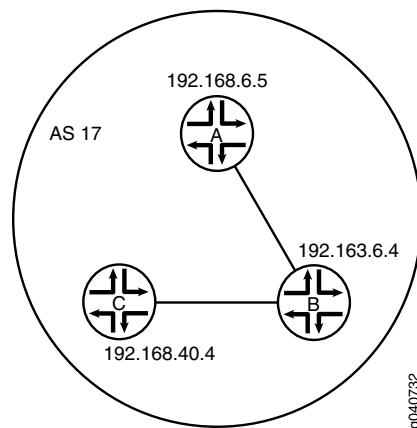**Configuration**

- [Configuring Device A on page 2670](#)
- [Configuring Device B on page 2672](#)
- [Configuring Device C on page 2674](#)

**CLI Quick Configuration**

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device A**

```

set interfaces ge-0/1/0 unit 1 description to-B
set interfaces ge-0/1/0 unit 1 family inet address 10.10.10.1/30
set interfaces lo0 unit 1 family inet address 192.168.6.5/32
set protocols bgp group internal-peers type internal
set protocols bgp group internal-peers description "connections to B and C"
set protocols bgp group internal-peers local-address 192.168.6.5
set protocols bgp group internal-peers export send-direct
set protocols bgp group internal-peers neighbor 192.163.6.4
set protocols bgp group internal-peers neighbor 192.168.40.4
set protocols ospf area 0.0.0.0 interface lo0.1 passive
set protocols ospf area 0.0.0.0 interface ge-0/1/0.1
set policy-options policy-statement send-direct term 2 from protocol direct
set policy-options policy-statement send-direct term 2 then accept
set routing-options router-id 192.168.6.5
set routing-options autonomous-system 17

```

**Device B**

```

set interfaces ge-0/1/0 unit 2 description to-A
set interfaces ge-0/1/0 unit 2 family inet address 10.10.10.2/30
set interfaces ge-0/1/1 unit 5 description to-C
set interfaces ge-0/1/1 unit 5 family inet address 10.10.10.5/30
set interfaces lo0 unit 2 family inet address 192.163.6.4/32
set protocols bgp group internal-peers type internal
set protocols bgp group internal-peers description "connections to A and C"
set protocols bgp group internal-peers local-address 192.163.6.4
set protocols bgp group internal-peers export send-direct
set protocols bgp group internal-peers neighbor 192.168.40.4
set protocols bgp group internal-peers neighbor 192.168.6.5

```



```
set protocols ospf area 0.0.0.0 interface lo0.2 passive
set protocols ospf area 0.0.0.0 interface ge-0/1/0.2
set protocols ospf area 0.0.0.0 interface ge-0/1/1.5
set policy-options policy-statement send-direct term 2 from protocol direct
set policy-options policy-statement send-direct term 2 then accept
set routing-options router-id 192.163.6.4
set routing-options autonomous-system 17
```

**Device C**

```
set interfaces ge-0/1/0 unit 6 description to-B
set interfaces ge-0/1/0 unit 6 family inet address 10.10.10.6/30
set interfaces lo0 unit 3 family inet address 192.168.40.4/32
set protocols bgp group internal-peers type internal
set protocols bgp group internal-peers description "connections to A and B"
set protocols bgp group internal-peers local-address 192.168.40.4
set protocols bgp group internal-peers export send-direct
set protocols bgp group internal-peers neighbor 192.163.6.4
set protocols bgp group internal-peers neighbor 192.168.6.5
set protocols ospf area 0.0.0.0 interface lo0.3 passive
set protocols ospf area 0.0.0.0 interface ge-0/1/0.6
set policy-options policy-statement send-direct term 2 from protocol direct
set policy-options policy-statement send-direct term 2 then accept
set routing-options router-id 192.168.40.4
set routing-options autonomous-system 17
```

### *Configuring Device A*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure internal BGP peer sessions on Device A:

1. Configure the interfaces.

```
[edit interfaces ge-0/1/0 unit 1]
user@A# set description to-B
user@A# set family inet address 10.10.10.1/30
```

```
[edit interfaces]
user@A# set lo0 unit 1 family inet address 192.168.6.5/32
```

2. Configure BGP.

The **neighbor** statements are included for both Device B and Device C, even though Device A is not directly connected to Device C.

```
[edit protocols bgp group internal-peers]
user@A# set type internal
user@A# set description "connections to B and C"
user@A# set local-address 192.168.6.5
user@A# set export send-direct
user@A# set neighbor 192.163.6.4
user@A# set neighbor 192.168.40.4
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
```



```

user@A# set interface lo0.1 passive
user@A# set interface ge-0/1/0.1

```

4. Configure a policy that accepts direct routes.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```

[edit policy-options policy-statement send-direct term 2]
user@A# set from protocol direct
user@A# set then accept

```

5. Configure the router ID and the AS number.

```

[edit routing-options]
user@A# set router-id 192.168.6.5
user@A# set autonomous-system 17

```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@A# show interfaces
ge-0/1/0 {
  unit 1 {
    description to-B;
    family inet {
      address 10.10.10.1/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 192.168.6.5/32;
    }
  }
}

user@A# show policy-options
policy-statement send-direct {
  term 2 {
    from protocol direct;
    then accept;
  }
}

user@A# show protocols
bgp {
  group internal-peers {
    type internal;
    description "connections to B and C";
    local-address 192.168.6.5;
    export send-direct;
    neighbor 192.163.6.4;
    neighbor 192.168.40.4;
  }
}

```



```
}  
}  
ospf {  
  area 0.0.0.0 {  
    interface lo0.1 {  
      passive;  
    }  
    interface ge-0/1/0.1;  
  }  
}  
  
user@A# show routing-options  
router-id 192.168.6.5;  
autonomous-system 17;
```

If you are done configuring the device, enter **commit** from configuration mode.

### *Configuring Device B*

#### **Step-by-Step Procedure**

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure internal BGP peer sessions on Device B:

1. Configure the interfaces.

```
[edit interfaces ge-0/1/0 unit 2]  
user@B# set description to-A  
user@B# set family inet address 10.10.10.2/30
```

```
[edit interfaces ge-0/1/1]  
user@B# set unit 5 description to-C  
user@B# set unit 5 family inet address 10.10.10.5/30
```

```
[edit interfaces]  
user@B# set lo0 unit 2 family inet address 192.163.6.4/32
```

2. Configure BGP.

The **neighbor** statements are included for both Device B and Device C, even though Device A is not directly connected to Device C.

```
[edit protocols bgp group internal-peers]  
user@B# set type internal  
user@B# set description "connections to A and C"  
user@B# set local-address 192.163.6.4  
user@B# set export send-direct  
user@B# set neighbor 192.168.40.4  
user@B# set neighbor 192.168.6.5
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]  
user@B# set interface lo0.2 passive  
user@B# set interface ge-0/1/0.2  
user@B# set interface ge-0/1/1.5
```



4. Configure a policy that accepts direct routes.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 2]
user@B# set from protocol direct
user@B# set then accept
```

5. Configure the router ID and the AS number.

```
[edit routing-options]
user@B# set router-id 192.163.6.4
user@B# set autonomous-system 17
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@B# show interfaces
ge-0/1/0 {
  unit 2 {
    description to-A;
    family inet {
      address 10.10.10.2/30;
    }
  }
}
ge-0/1/1 {
  unit 5 {
    description to-C;
    family inet {
      address 10.10.10.5/30;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 192.163.6.4/32;
    }
  }
}

user@B# show policy-options
policy-statement send-direct {
  term 2 {
    from protocol direct;
    then accept;
  }
}

user@B# show protocols
bgp {
  group internal-peers {
    type internal;
```



```
        description "connections to A and C";
        local-address 192.163.6.4;
        export send-direct;
        neighbor 192.168.40.4;
        neighbor 192.168.6.5;
    }
}
ospf {
    area 0.0.0.0 {
        interface lo0.2 {
            passive;
        }
        interface ge-0/1/0.2;
        interface ge-0/1/1.5;
    }
}
```

```
user@B# show routing-options
router-id 192.163.6.4;
autonomous-system 17;
```

If you are done configuring the device, enter **commit** from configuration mode.

### *Configuring Device C*

#### **Step-by-Step Procedure**

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure internal BGP peer sessions on Device C:

1. Configure the interfaces.

```
[edit interfaces ge-0/1/0 unit 6]
user@C# set description to-B
user@C# set family inet address 10.10.10.6/30

[edit interfaces]
user@C# set lo0 unit 3 family inet address 192.168.40.4/32
```

2. Configure BGP.

The **neighbor** statements are included for both Device B and Device C, even though Device A is not directly connected to Device C.

```
[edit protocols bgp group internal-peers]
user@C# set type internal
user@C# set description "connections to A and B"
user@C# set local-address 192.168.40.4
user@C# set export send-direct
user@C# set neighbor 192.163.6.4
user@C# set neighbor 192.168.6.5
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@C# set interface lo0.3 passive
user@C# set interface ge-0/1/0.6
```



4. Configure a policy that accepts direct routes.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 2]
user@C# set from protocol direct
user@C# set then accept
```

5. Configure the router ID and the AS number.

```
[edit routing-options]
user@C# set router-id 192.168.40.4
user@C# set autonomous-system 17
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@C# show interfaces
ge-0/1/0 {
  unit 6 {
    description to-B;
    family inet {
      address 10.10.10.6/30;
    }
  }
}
lo0 {
  unit 3 {
    family inet {
      address 192.168.40.4/32;
    }
  }
}

user@C# show policy-options
policy-statement send-direct {
  term 2 {
    from protocol direct;
    then accept;
  }
}

user@C# show protocols
bgp {
  group internal-peers {
    type internal;
    description "connections to A and B";
    local-address 192.168.40.4;
    export send-direct;
    neighbor 192.163.6.4;
    neighbor 192.168.6.5;
  }
}
ospf {
```



```
area 0.0.0.0 {  
    interface lo0.3 {  
        passive;  
    }  
    interface ge-0/1/0.6;  
}  
}
```

```
user@C# show routing-options  
router-id 192.168.40.4;  
autonomous-system 17;
```

If you are done configuring the device, enter **commit** from configuration mode.

### **Verification**

Confirm that the configuration is working properly.

- [Verifying BGP Neighbors on page 2676](#)
- [Verifying BGP Groups on page 2677](#)
- [Verifying BGP Summary Information on page 2678](#)
- [Verifying That BGP Routes Are Installed in the Routing Table on page 2678](#)

### **Verifying BGP Neighbors**

**Purpose** Verify that BGP is running on configured interfaces and that the BGP session is active for each neighbor address.

**Action** From operational mode, enter the **show bgp neighbor** command.

```
user@A> show bgp neighbor  
Peer: 192.163.6.4+179 AS 17    Local: 192.168.6.5+58852 AS 17  
  Type: Internal    State: Established    Flags: Sync  
  Last State: OpenConfirm    Last Event: RecvKeepAlive  
  Last Error: None  
  Export: [ send-direct ]  
  Options: Preference LocalAddress Refresh  
  Local Address: 192.168.6.5 Holdtime: 90 Preference: 170  
  Number of flaps: 0  
  Peer ID: 192.163.6.4    Local ID: 192.168.6.5    Active Holdtime: 90  
  Keepalive Interval: 30    Peer index: 0  
  BFD: disabled, down  
  NLRI for restart configured on peer: inet-unicast  
  NLRI advertised by peer: inet-unicast  
  NLRI for this session: inet-unicast  
  Peer supports Refresh capability (2)  
  Restart time configured on the peer: 120  
  Stale routes from peer are kept for: 300  
  Restart time requested by this peer: 120  
  NLRI that peer supports restart for: inet-unicast  
  NLRI that restart is negotiated for: inet-unicast  
  NLRI of received end-of-rib markers: inet-unicast  
  NLRI of all end-of-rib markers sent: inet-unicast  
  Peer supports 4 byte AS extension (peer-as 17)  
  Peer does not support Addpath  
  Table inet.0 Bit: 10000  
    RIB State: BGP restart is complete  
    Send state: in sync
```



```

Active prefixes:          0
Received prefixes:       3
Accepted prefixes:       3
Suppressed due to damping: 0
Advertised prefixes:     2
Last traffic (seconds): Received 25   Sent 19   Checked 67
Input messages:  Total 2420   Updates 4       Refreshes 0       Octets 46055
Output messages: Total 2411   Updates 2       Refreshes 0       Octets 45921
Output Queue[0]: 0

Peer: 192.168.40.4+179 AS 17   Local: 192.168.6.5+56466 AS 17
Type: Internal   State: Established   Flags: Sync
Last State: OpenConfirm   Last Event: RecvKeepAlive
Last Error: None
Export: [ send-direct ]
Options: Preference LocalAddress Refresh
Local Address: 192.168.6.5 Holdtime: 90 Preference: 170
Number of flaps: 0
Peer ID: 192.168.40.4   Local ID: 192.168.6.5       Active Holdtime: 90
Keepalive Interval: 30   Peer index: 1
BFD: disabled, down
NLRI for restart configured on peer: inet-unicast
NLRI advertised by peer: inet-unicast
NLRI for this session: inet-unicast
Peer supports Refresh capability (2)
Restart time configured on the peer: 120
Stale routes from peer are kept for: 300
Restart time requested by this peer: 120
NLRI that peer supports restart for: inet-unicast
NLRI that restart is negotiated for: inet-unicast
NLRI of received end-of-rib markers: inet-unicast
NLRI of all end-of-rib markers sent: inet-unicast
Peer supports 4 byte AS extension (peer-as 17)
Peer does not support Addpath
Table inet.0 Bit: 10000
RIB State: BGP restart is complete
Send state: in sync
Active prefixes:          0
Received prefixes:       2
Accepted prefixes:       2
Suppressed due to damping: 0
Advertised prefixes:     2
Last traffic (seconds): Received 7   Sent 21   Checked 24
Input messages:  Total 2412   Updates 2       Refreshes 0       Octets 45867
Output messages: Total 2409   Updates 2       Refreshes 0       Octets 45883
Output Queue[0]: 0

```

### Verifying BGP Groups

**Purpose** Verify that the BGP groups are configured correctly.

**Action** From operational mode, enter the **show bgp group** command.

```

user@A> show bgp group
Group Type: Internal   AS: 17                               Local AS: 17
Name: internal-peers   Index: 0                               Flags: <Export Eval>
Export: [ send-direct ]
Holdtime: 0
Total peers: 2         Established: 2
192.163.6.4+179
192.168.40.4+179

```



```
inet.0: 0/5/5/0
```

```
Groups: 1 Peers: 2 External: 0 Internal: 2 Down peers: 0 Flaps: 0
Table Tot Paths Act Paths Suppressed History Damp State Pending
inet.0 5 0 0 0 0 0 0
```

### Verifying BGP Summary Information

**Purpose** Verify that the BGP configuration is correct.

**Action** From operational mode, enter the **show bgp summary** command.

```
user@A> show bgp summary
Groups: 1 Peers: 2 Down peers: 0
Table Tot Paths Act Paths Suppressed History Damp State Pending
inet.0 5 0 0 0 0 0 0
Peer AS InPkt OutPkt OutQ Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
192.163.6.4 17 2441 2432 0 0 18:18:52
0/3/3/0 0/0/0/0
192.168.40.4 17 2432 2430 0 0 18:18:48
0/2/2/0 0/0/0/0
```

### Verifying That BGP Routes Are Installed in the Routing Table

**Purpose** Verify that the export policy configuration is causing the BGP routes to be installed in the routing tables of the peers.

**Action** From operational mode, enter the **show route protocol bgp** command.

```
user@A> show route protocol bgp
inet.0: 7 destinations, 12 routes (7 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.10.0/30 [BGP/170] 07:09:57, localpref 100, from 192.163.6.4
AS path: I
> to 10.10.10.2 via ge-0/1/0.1
10.10.10.4/30 [BGP/170] 07:09:57, localpref 100, from 192.163.6.4
AS path: I
> to 10.10.10.2 via ge-0/1/0.1
[BGP/170] 07:07:12, localpref 100, from 192.168.40.4
AS path: I
> to 10.10.10.2 via ge-0/1/0.1
192.163.6.4/32 [BGP/170] 07:09:57, localpref 100, from 192.163.6.4
AS path: I
> to 10.10.10.2 via ge-0/1/0.1
192.168.40.4/32 [BGP/170] 07:07:12, localpref 100, from 192.168.40.4
AS path: I
> to 10.10.10.2 via ge-0/1/0.1
```

### Example: Configuring Internal BGP Peering Sessions on Logical Systems

This example shows how to configure internal BGP peer sessions on logical systems.

- [Requirements on page 2679](#)
- [Overview on page 2679](#)



- [Configuration on page 2679](#)
- [Verification on page 2686](#)

### Requirements

In this example, no special configuration beyond device initialization is required.


### Overview

In this example, you configure internal BGP (IBGP) peering sessions.

In the sample network, the devices in AS 17 are fully meshed in the group **internal-peers**. The devices have loopback addresses 192.168.6.5, 192.163.6.4, and 192.168.40.4.

[Figure 55 on page 2679](#) shows a typical network with internal peer sessions.

**Figure 55: Typical Network with IBGP Sessions**

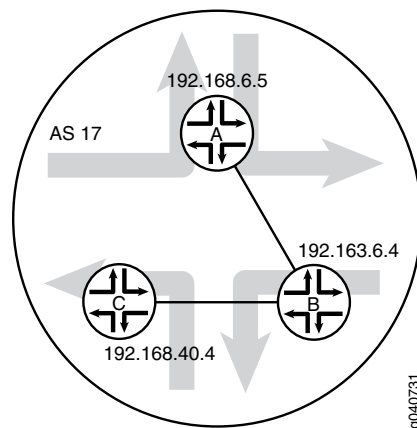

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set logical-systems A interfaces lt-0/1/0 unit 1 description to-B
set logical-systems A interfaces lt-0/1/0 unit 1 encapsulation ethernet
set logical-systems A interfaces lt-0/1/0 unit 1 peer-unit 2
set logical-systems A interfaces lt-0/1/0 unit 1 family inet address 10.10.10.1/30
set logical-systems A interfaces lo0 unit 1 family inet address 192.168.6.5/32
set logical-systems A protocols bgp group internal-peers type internal
set logical-systems A protocols bgp group internal-peers local-address 192.168.6.5
set logical-systems A protocols bgp group internal-peers export send-direct
set logical-systems A protocols bgp group internal-peers neighbor 192.163.6.4
set logical-systems A protocols bgp group internal-peers neighbor 192.168.40.4
set logical-systems A protocols ospf area 0.0.0.0 interface lo0.1 passive
set logical-systems A protocols ospf area 0.0.0.0 interface lt-0/1/0.1
set logical-systems A policy-options policy-statement send-direct term 2 from protocol
  direct
set logical-systems A policy-options policy-statement send-direct term 2 then accept
set logical-systems A routing-options router-id 192.168.6.5
```



```

set logical-systems A routing-options autonomous-system 17
set logical-systems B interfaces lt-0/1/0 unit 2 description to-A
set logical-systems B interfaces lt-0/1/0 unit 2 encapsulation ethernet
set logical-systems B interfaces lt-0/1/0 unit 2 peer-unit 1
set logical-systems B interfaces lt-0/1/0 unit 2 family inet address 10.10.10.2/30
set logical-systems B interfaces lt-0/1/0 unit 5 description to-C
set logical-systems B interfaces lt-0/1/0 unit 5 encapsulation ethernet
set logical-systems B interfaces lt-0/1/0 unit 5 peer-unit 6
set logical-systems B interfaces lt-0/1/0 unit 5 family inet address 10.10.10.5/30
set logical-systems B interfaces lo0 unit 2 family inet address 192.163.6.4/32
set logical-systems B protocols bgp group internal-peers type internal
set logical-systems B protocols bgp group internal-peers local-address 192.163.6.4
set logical-systems B protocols bgp group internal-peers export send-direct
set logical-systems B protocols bgp group internal-peers neighbor 192.168.40.4
set logical-systems B protocols bgp group internal-peers neighbor 192.168.6.5
set logical-systems B protocols ospf area 0.0.0.0 interface lo0.2 passive
set logical-systems B protocols ospf area 0.0.0.0 interface lt-0/1/0.2
set logical-systems B protocols ospf area 0.0.0.0 interface lt-0/1/0.5
set logical-systems B policy-options policy-statement send-direct term 2 from protocol
    direct
set logical-systems B policy-options policy-statement send-direct term 2 then accept
set logical-systems B routing-options router-id 192.163.6.4
set logical-systems B routing-options autonomous-system 17
set logical-systems C interfaces lt-0/1/0 unit 6 description to-B
set logical-systems C interfaces lt-0/1/0 unit 6 encapsulation ethernet
set logical-systems C interfaces lt-0/1/0 unit 6 peer-unit 5
set logical-systems C interfaces lt-0/1/0 unit 6 family inet address 10.10.10.6/30
set logical-systems C interfaces lo0 unit 3 family inet address 192.168.40.4/32
set logical-systems C protocols bgp group internal-peers type internal
set logical-systems C protocols bgp group internal-peers local-address 192.168.40.4
set logical-systems C protocols bgp group internal-peers export send-direct
set logical-systems C protocols bgp group internal-peers neighbor 192.163.6.4
set logical-systems C protocols bgp group internal-peers neighbor 192.168.6.5
set logical-systems C protocols ospf area 0.0.0.0 interface lo0.3 passive
set logical-systems C protocols ospf area 0.0.0.0 interface lt-0/1/0.6
set logical-systems C policy-options policy-statement send-direct term 2 from protocol
    direct
set logical-systems C policy-options policy-statement send-direct term 2 then accept
set logical-systems C routing-options router-id 192.168.40.4
set logical-systems C routing-options autonomous-system 17

```

### Device A

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure internal BGP peer sessions on Device A:

1. Configure the interfaces.
 

```

[edit logical-systems A interfaces lt-0/1/0 unit 1]
user@R1# set description to-B
user@R1# set encapsulation ethernet
user@R1# set peer-unit 2
user@R1# set family inet address 10.10.10.1/30

```



```

user@R1# set family inet address 192.168.6.5/32
user@R1# up
user@R1# up
[edit logical-systems A interfaces]
user@R1# set lo0 unit 1 family inet address 192.168.6.5/32
user@R1# exit
[edit]
user@R1# edit logical-systems B interfaces lt-0/1/0
[edit logical-systems B interfaces lt-0/1/0]
user@R1# set unit 2 description to-A
user@R1# set unit 2 encapsulation ethernet
user@R1# set unit 2 peer-unit 1
user@R1# set unit 2 family inet address 10.10.10.2/30
user@R1# set unit 5 description to-C
user@R1# set unit 5 encapsulation ethernet
user@R1# set unit 5 peer-unit 6
user@R1# set family inet address 10.10.10.5/30
user@R1# up
[edit logical-systems B interfaces]
user@R1# set lo0 unit 2 family inet address 192.163.6.4/32
user@R1# exit
[edit]
user@R1# edit logical-systems C interfaces lt-0/1/0 unit 6
[edit logical-systems C interfaces lt-0/1/0 unit 6]
set description to-B
set encapsulation ethernet
set peer-unit 5
set family inet address 10.10.10.6/30
user@R1# up
user@R1# up
[edit logical-systems C interfaces]
set lo0 unit 3 family inet address 192.168.40.4/32

```

## 2. Configure BGP.

On Logical System A, the **neighbor** statements are included for both Device B and Device C, even though Logical System A is not directly connected to Device C.

```

[edit logical-systems A protocols bgp group internal-peers]
user@R1# set type internal
user@R1# set local-address 192.168.6.5
user@R1# set export send-direct
user@R1# set neighbor 192.163.6.4
user@R1# set neighbor 192.168.40.4

```

```

[edit logical-systems B protocols bgp group internal-peers]
user@R1# set type internal
user@R1# set local-address 192.163.6.4
user@R1# set export send-direct
user@R1# set neighbor 192.168.40.4
user@R1# set neighbor 192.168.6.5

```

```

[edit logical-systems C protocols bgp group internal-peers]
user@R1# set type internal
user@R1# set local-address 192.168.40.4
user@R1# set export send-direct

```



```
user@R1# set neighbor 192.163.6.4
user@R1# set neighbor 192.168.6.5
```

3. Configure OSPF.

```
[edit logical-systems A protocols ospf area 0.0.0.0]
user@R1# set interface lo0.1 passive
user@R1# set interface lt-0/1/0.1
```

```
[edit logical-systems A protocols ospf area 0.0.0.0]
user@R1# set interface lo0.2 passive
user@R1# set interface lt-0/1/0.2
user@R1# set interface lt-0/1/0.5
```

```
[edit logical-systems A protocols ospf area 0.0.0.0]
user@R1# set interface lo0.3 passive
user@R1# set interface lt-0/1/0.6
```

4. Configure a policy that accepts direct routes.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit logical-systems A policy-options policy-statement send-direct term 2]
user@R1# set from protocol direct
user@R1# set then accept
```

```
[edit logical-systems B policy-options policy-statement send-direct term 2]
user@R1# set from protocol direct
user@R1# set then accept
```

```
[edit logical-systems C policy-options policy-statement send-direct term 2]
user@R1# set from protocol direct
user@R1# set then accept
```

5. Configure the router ID and the autonomous system (AS) number.

```
[edit logical-systems A routing-options]
user@R1# set router-id 192.168.6.5
user@R1# set autonomous-system 17
```

```
[edit logical-systems B routing-options]
user@R1# set router-id 192.163.6.4
user@R1# set autonomous-system 17
```

```
[edit logical-systems C routing-options]
user@R1# set router-id 192.168.40.4
user@R1# set autonomous-system 17
```

**Results** From configuration mode, confirm your configuration by entering the **show logical-systems** command. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
user@R1# show logical-systems
A {
```



```

interfaces {
  lt-0/1/0 {
    unit 1 {
      description to-B;
      encapsulation ethernet;
      peer-unit 2;
      family inet {
        address 10.10.10.1/30;
      }
    }
  }
  lo0 {
    unit 1 {
      family inet {
        address 192.168.6.5/32;
      }
    }
  }
}
protocols {
  bgp {
    group internal-peers {
      type internal;
      local-address 192.168.6.5;
      export send-direct;
      neighbor 192.163.6.4;
      neighbor 192.168.40.4;
    }
  }
  ospf {
    area 0.0.0.0 {
      interface lo0.1 {
        passive;
      }
      interface lt-0/1/0.1;
    }
  }
}
policy-options {
  policy-statement send-direct {
    term 2 {
      from protocol direct;
      then accept;
    }
  }
}
routing-options {
  router-id 192.168.6.5;
  autonomous-system 17;
}
}
B {
  interfaces {
    lt-0/1/0 {
      unit 2 {
        description to-A;

```



```
        encapsulation ethernet;
        peer-unit 1;
        family inet {
            address 10.10.10.2/30;
        }
    }
    unit 5 {
        description to-C;
        encapsulation ethernet;
        peer-unit 6;
        family inet {
            address 10.10.10.5/30;
        }
    }
}
lo0 {
    unit 2 {
        family inet {
            address 192.163.6.4/32;
        }
    }
}
}
protocols {
    bgp {
        group internal-peers {
            type internal;
            local-address 192.163.6.4;
            export send-direct;
            neighbor 192.168.40.4;
            neighbor 192.168.6.5;
        }
    }
    ospf {
        area 0.0.0.0 {
            interface lo0.2 {
                passive;
            }
            interface lt-0/1/0.2;
            interface lt-0/1/0.5;
        }
    }
}
policy-options {
    policy-statement send-direct {
        term 2 {
            from protocol direct;
            then accept;
        }
    }
}
routing-options {
    router-id 192.163.6.4;
    autonomous-system 17;
}
}
```



```

C {
  interfaces {
    lt-0/1/0 {
      unit 6 {
        description to-B;
        encapsulation ethernet;
        peer-unit 5;
        family inet {
          address 10.10.10.6/30;
        }
      }
    }
    lo0 {
      unit 3 {
        family inet {
          address 192.168.40.4/32;
        }
      }
    }
  }
  protocols {
    bgp {
      group internal-peers {
        type internal;
        local-address 192.168.40.4;
        export send-direct;
        neighbor 192.163.6.4;
        neighbor 192.168.6.5;
      }
    }
    ospf {
      area 0.0.0.0 {
        interface lo0.3 {
          passive;
        }
        interface lt-0/1/0.6;
      }
    }
  }
  policy-options {
    policy-statement send-direct {
      term 2 {
        from protocol direct;
        then accept;
      }
    }
  }
  routing-options {
    router-id 192.168.40.4;
    autonomous-system 17;
  }
}

```

If you are done configuring the device, enter **commit** from configuration mode.



### Verification

Confirm that the configuration is working properly.

- [Verifying BGP Neighbors on page 2686](#)
- [Verifying BGP Groups on page 2687](#)
- [Verifying BGP Summary Information on page 2687](#)
- [Verifying That BGP Routes Are Installed in the Routing Table on page 2688](#)

### Verifying BGP Neighbors

**Purpose** Verify that BGP is running on configured interfaces and that the BGP session is active for each neighbor address.

**Action** From the operational mode, enter the **show bgp neighbor** command.

```
user@R1> show bgp neighbor logical-system A
Peer: 192.163.6.4+179 AS 17   Local: 192.168.6.5+58852 AS 17
  Type: Internal   State: Established   Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ send-direct ]
  Options: <Preference LocalAddress Refresh>
  Local Address: 192.168.6.5 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 192.163.6.4   Local ID: 192.168.6.5   Active Holdtime: 90
  Keepalive Interval: 30   Peer index: 0
  BFD: disabled, down
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 120
  Stale routes from peer are kept for: 300
  Restart time requested by this peer: 120
  NLRI that peer supports restart for: inet-unicast
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 17)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:          0
    Received prefixes:        3
    Accepted prefixes:        3
    Suppressed due to damping: 0
    Advertised prefixes:      2
  Last traffic (seconds): Received 16   Sent 1   Checked 63
  Input messages: Total 15713 Updates 4   Refreshes 0   Octets 298622
  Output messages: Total 15690 Updates 2   Refreshes 0   Octets 298222
  Output Queue[0]: 0

Peer: 192.168.40.4+179 AS 17   Local: 192.168.6.5+56466 AS 17
  Type: Internal   State: Established   Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
```



```

Export: [ send-direct ]
Options: <Preference LocalAddress Refresh>
Local Address: 192.168.6.5 Holdtime: 90 Preference: 170
Number of flaps: 0
Peer ID: 192.168.40.4    Local ID: 192.168.6.5    Active Holdtime: 90
Keepalive Interval: 30    Peer index: 1
BFD: disabled, down
NLRI for restart configured on peer: inet-unicast
NLRI advertised by peer: inet-unicast
NLRI for this session: inet-unicast
Peer supports Refresh capability (2)
Restart time configured on the peer: 120
Stale routes from peer are kept for: 300
Restart time requested by this peer: 120
NLRI that peer supports restart for: inet-unicast
NLRI that restart is negotiated for: inet-unicast
NLRI of received end-of-rib markers: inet-unicast
NLRI of all end-of-rib markers sent: inet-unicast
Peer supports 4 byte AS extension (peer-as 17)
Peer does not support Addpath
Table inet.0 Bit: 10000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:      0
  Received prefixes:    2
  Accepted prefixes:    2
  Suppressed due to damping: 0
  Advertised prefixes:  2
Last traffic (seconds): Received 15    Sent 22    Checked 68
Input messages: Total 15688 Updates 2    Refreshes 0    Octets 298111
Output messages: Total 15688 Updates 2    Refreshes 0    Octets 298184
Output Queue[0]: 0

```

### Verifying BGP Groups

**Purpose** Verify that the BGP groups are configured correctly.

**Action** From the operational mode, enter the **show bgp group** command.

```

user@A> show bgp group logical-system A
Group Type: Internal    AS: 17                      Local AS: 17
Name: internal-peers   Index: 0                    Flags: <Export Eval>
Export: [ send-direct ]
Holdtime: 0
Total peers: 2          Established: 2
192.163.6.4+179
192.168.40.4+179
inet.0: 0/5/5/0

Groups: 1  Peers: 2   External: 0   Internal: 2   Down peers: 0   Flaps: 0
Table      Tot Paths  Act Paths  Suppressed   History  Damp State   Pending
inet.0           5           0           0           0        0        0

```

### Verifying BGP Summary Information

**Purpose** Verify that the BGP configuration is correct.

**Action** From the operational mode, enter the **show bgp summary** command.

```

user@A> show bgp summary logical-system A

```



```

Groups: 1 Peers: 2 Down peers: 0
Table      Tot Paths  Act Paths Suppressed  History  Damp State  Pending
inet.0      5          0          0          0        0      0      0
Peer        AS      InPkt    OutPkt    OutQ    Flaps  Last Up/Dwn
State|#Active/Received/Accepted/Damped...
192.163.6.4  17      15723    15700     0        0 4d 22:13:15
0/3/3/0      0/0/0/0
192.168.40.4 17      15698    15699     0        0 4d 22:13:11
0/2/2/0      0/0/0/0

```

### Verifying That BGP Routes Are Installed in the Routing Table

**Purpose** Verify that the export policy configuration is working.

**Action** From the operational mode, enter the **show route protocol bgp** command.

```

user@A> show route protocol bgp logical-system A
inet.0: 7 destinations, 12 routes (7 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.10.0/30      [BGP/170] 4d 11:05:55, localpref 100, from 192.163.6.4
                  AS path: I
                  > to 10.10.10.2 via 1t-0/1/0.1
10.10.10.4/30      [BGP/170] 4d 11:05:55, localpref 100, from 192.163.6.4
                  AS path: I
                  > to 10.10.10.2 via 1t-0/1/0.1
                  [BGP/170] 4d 11:03:10, localpref 100, from 192.168.40.4
                  AS path: I
                  > to 10.10.10.2 via 1t-0/1/0.1
192.163.6.4/32     [BGP/170] 4d 11:05:55, localpref 100, from 192.163.6.4
                  AS path: I
                  > to 10.10.10.2 via 1t-0/1/0.1
192.168.40.4/32    [BGP/170] 4d 11:03:10, localpref 100, from 192.168.40.4
                  AS path: I
                  > to 10.10.10.2 via 1t-0/1/0.1

```

**Related Documentation** • [Examples: Configuring External BGP Peering on page 2643](#)

## BGP Path Attribute Configuration

- [Example: Configuring BGP Local Preference on page 2688](#)
- [Examples: Configuring BGP MED on page 2702](#)
- [Examples: Configuring BGP Local AS on page 2740](#)
- [Example: Configuring the Accumulated IGP Attribute for BGP on page 2760](#)

### Example: Configuring BGP Local Preference

- [Understanding the BGP Local Preference on page 2688](#)
- [Example: Configuring the Local Preference Value for BGP Routes on page 2689](#)

#### Understanding the BGP Local Preference

Internal BGP (IBGP) sessions use a metric called the *local preference*, which is carried in IBGP update packets in the path attribute LOCAL\_PREF. When an autonomous system



(AS) has multiple routes to another AS, the local preference indicates the degree of preference for one route over the other routes. The route with the highest local preference value is preferred.

The LOCAL\_PREF path attribute is always advertised to IBGP peers and to neighboring confederations. It is never advertised to external BGP (EBGP) peers. The default behavior is to not modify the LOCAL\_PREF path attribute if it is present.

The LOCAL\_PREF path attribute applies at export time only, when the routes are exported from the routing table into BGP.

If a BGP route is received without a LOCAL\_PREF attribute, the route is stored in the routing table and advertised by BGP as if it were received with a LOCAL\_PREF value of 100. A non-BGP route that is advertised by BGP is advertised with a LOCAL\_PREF value of 100 by default.

### **Example: Configuring the Local Preference Value for BGP Routes**

This example shows how to configure local preference in internal BGP (IBGP) peer sessions.

- [Requirements on page 2689](#)
- [Overview on page 2689](#)
- [Configuration on page 2690](#)
- [Verification on page 2700](#)

#### **Requirements**

No special configuration beyond device initialization is required before you configure this example.

#### **Overview**


To change the local preference metric advertised in the path attribute, you must include the **local-preference** statement, specifying a value from 0 through 4,294,967,295 ( $2^{32} - 1$ ).

There are several reasons you might want to prefer one path over another. For example, compared to other paths, one path might be less expensive to use, might have higher bandwidth, or might be more stable.

[Figure 56 on page 2690](#) shows a typical network with internal peer sessions and multiple exit points to a neighboring AS.



Figure 56: Typical Network with IBGP Sessions and Multiple Exit Points

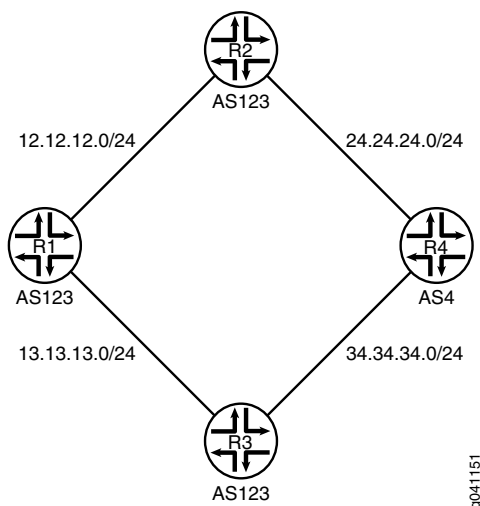

To reach Device R4, Device R1 can take a path through either Device R2 or Device R3. By default, the local preference is 100 for either route. When the local preferences are equal, Junos OS has rules for breaking the tie and choosing a path. (See [“Understanding BGP Path Selection” on page 2827](#).) In this example, the active route is through Device R2 because the router ID of Device R2 is lower than the router ID of Device R3. The following example shows how to override the default behavior with an explicit setting for the local preference. The example configures a local preference of 300 on Device R3, thereby making Device R3 the preferred path to reach Device R4.

#### Configuration

- [Configuring Device R1 on page 2692](#)
- [Configuring Device R2 on page 2694](#)
- [Configuring Device R3 on page 2696](#)
- [Configuring Device R4 on page 2698](#)

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```

Device R1
set interfaces fe-1/2/0 unit 1 family inet address 12.12.12.1/24
set interfaces fe-1/2/1 unit 2 family inet address 13.13.13.1/24
set interfaces lo0 unit 1 family inet address 192.168.1.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.1.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.2.1
set protocols bgp group internal neighbor 192.168.3.1
set protocols ospf area 0.0.0.0 interface lo0.1 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.1
set protocols ospf area 0.0.0.0 interface fe-1/2/1.2
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept

```



```
set routing-options autonomous-system 123
set routing-options router-id 192.168.1.1
```

**Device R2**

```
set interfaces fe-1/2/0 unit 3 family inet address 12.12.12.2/24
set interfaces fe-1/2/1 unit 4 family inet address 24.24.24.2/24
set interfaces lo0 unit 2 family inet address 192.168.2.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.2.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.1.1
set protocols bgp group internal neighbor 192.168.3.1
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 4
set protocols bgp group external neighbor 24.24.24.4
set protocols ospf area 0.0.0.0 interface lo0.2 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.3
set protocols ospf area 0.0.0.0 interface fe-1/2/1.4
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 123
set routing-options router-id 192.168.2.1
```

**Device R3**

```
set interfaces fe-1/2/0 unit 5 family inet address 13.13.13.3/24
set interfaces fe-1/2/1 unit 6 family inet address 34.34.34.3/24
set interfaces lo0 unit 3 family inet address 192.168.3.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.3.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.1.1
set protocols bgp group internal neighbor 192.168.2.1
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 4
set protocols bgp group external neighbor 34.34.34.4
set protocols ospf area 0.0.0.0 interface lo0.3 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.5
set protocols ospf area 0.0.0.0 interface fe-1/2/1.6
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 123
set routing-options router-id 192.168.3.1
```

**Device R4**

```
set interfaces fe-1/2/0 unit 7 family inet address 24.24.24.4/24
set interfaces fe-1/2/1 unit 8 family inet address 34.34.34.4/24
set interfaces lo0 unit 4 family inet address 192.168.4.1/32
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 123
set protocols bgp group external neighbor 34.34.34.3
set protocols bgp group external neighbor 24.24.24.2
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 4
set routing-options router-id 192.168.4.1
```



### Configuring Device R1

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R1:

1. Configure the interfaces.  

```
[edit interfaces fe-1/2/0 unit 1]
user@R1# set family inet address 12.12.12.1/24

[edit interfaces fe-1/2/1 unit 2]
user@R1# set family inet address 13.13.13.1/24

[edit interfaces lo0 unit 1]
user@R1# set family inet address 192.168.1.1/32
```
2. Configure BGP.  

```
[edit protocols bgp group internal]
user@R1# set type internal
user@R1# set local-address 192.168.1.1
user@R1# set export send-direct
user@R1# set neighbor 192.168.2.1
user@R1# set neighbor 192.168.3.1
```
3. Configure OSPF.  

```
[edit protocols ospf area 0.0.0.0]
user@R1# set interface lo0.1 passive
user@R1# set interface fe-1/2/0.1
user@R1# set interface fe-1/2/1.2
```
4. Configure a policy that accepts direct routes.



**NOTE:** Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R1# set from protocol direct
user@R1# set then accept
```

5. Configure the router ID and autonomous system (AS) number.  

```
[edit routing-options]
user@R1# set autonomous-system 123
user@R1# set router-id 192.168.1.1
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.



```

user@R1# show interfaces
fe-1/2/0 {
  unit 1 {
    family inet {
      address 12.12.12.1/24;
    }
  }
}
fe-1/2/1 {
  unit 2 {
    family inet {
      address 13.13.13.1/24;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 192.168.1.1/32;
    }
  }
}

user@R1# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}

user@R1# show protocols
bgp {
  group internal {
    type internal;
    local-address 192.168.1.1;
    export send-direct;
    neighbor 192.168.2.1;
    neighbor 192.168.3.1;
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.1 {
      passive;
    }
    interface fe-1/2/0.1;
    interface fe-1/2/1.2;
  }
}

user@R1# show routing-options
autonomous-system 123;
router-id 192.168.1.1;

```

If you are done configuring the device, enter **commit** from configuration mode.



### *Configuring Device R2*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R2:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 3]  
user@R2# set family inet address 12.12.12.21/24
```

```
[edit interfaces fe-1/2/1 unit 4]  
user@R2# set family inet address 24.24.24.2/24
```

```
[edit interfaces lo0 unit 2]  
user@R2# set family inet address 192.168.2.1/32
```

2. Configure BGP.

```
[edit protocols bgp group internal]  
user@R2# set type internal  
user@R2# set local-address 192.168.2.1  
user@R2# set export send-direct  
user@R2# set neighbor 192.168.1.1  
user@R2# set neighbor 192.168.3.1
```

```
[edit protocols bgp group external]  
user@R2# set type external  
user@R2# set export send-direct  
user@R2# set peer-as 4  
user@R2# set neighbor 24.24.24.4
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]  
user@R2# set interface lo0.2 passive  
user@R2# set interface fe-1/2/0.3  
user@R2# set interface fe-1/2/1.4
```

4. Configure a policy that accepts direct routes.



.....  
**NOTE:** Other useful options for this scenario might be to accept routes learned through OSPF or local routes.  
.....

```
[edit policy-options policy-statement send-direct term 1]  
user@R2# set from protocol direct  
user@R2# set then accept
```

5. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]  
user@R2# set autonomous-system 123
```



```
user@R2# set router-id 192.168.2.1
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R2# show interfaces
fe-1/2/0 {
  unit 3 {
    family inet {
      address 12.12.12.2/24;
    }
  }
}
fe-1/2/1 {
  unit 4 {
    family inet {
      address 24.24.24.2/24;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 192.168.2.1/32;
    }
  }
}

user@R2# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}

user@R2# show protocols
bgp {
  group internal {
    type internal;
    local-address 192.168.2.1;
    export send-direct;
    neighbor 192.168.1.1;
    neighbor 192.168.3.1;
  }
  group external {
    type external;
    export send-direct;
    peer-as 4;
    neighbor 24.24.24.4;
  }
}
ospf {
  area 0.0.0.0 {
```



```
interface lo0.2 {  
    passive;  
}  
interface fe-1/2/0.3;  
interface fe-1/2/1.4;  
}  
}  
  
user@R2# show routing-options  
autonomous-system 123;  
router-id 192.168.2.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

### *Configuring Device R3*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R3:

1. Configure the interfaces.  

```
[edit interfaces fe-1/2/0 unit 5]  
user@R3# set family inet address 13.13.13.3/24  
  
[edit interfaces fe-1/2/1 unit 6]  
user@R3# set family inet address 34.34.34.3/24  
  
[edit interfaces lo0 unit 3]  
user@R3# set family inet address 192.168.3.1/32
```
2. Configure BGP.  

```
[edit protocols bgp group internal]  
user@R3# set type internal  
user@R3# set local-address 192.168.3.1  
user@R3# set export send-direct  
user@R3# set neighbor 192.168.1.1  
user@R3# set neighbor 192.168.2.1  
  
[edit protocols bgp group external]  
user@R3# set type external  
user@R3# set export send-direct  
user@R3# set peer-as 4  
user@R3# set neighbor 34.34.34.4
```
3. Configure OSPF.  

```
[edit protocols ospf area 0.0.0.0]  
user@R3# set interface lo0.3 passive  
user@R3# set interface fe-1/2/0.5  
user@R3# set interface fe-1/2/1.6
```
4. Configure a policy that accepts direct routes.





**NOTE:** Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R3# set from protocol direct
user@R3# set then accept
```

5. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R3# set autonomous-system 123
user@R3# set router-id 192.168.3.1
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R3# show interfaces
fe-1/2/0 {
  unit 5 {
    family inet {
      address 13.13.13.3/24;
    }
  }
}
fe-1/2/1 {
  unit 6 {
    family inet {
      address 34.34.34.3/24;
    }
  }
}
lo0 {
  unit 3 {
    family inet {
      address 192.168.3.1/32;
    }
  }
}

user@R3# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}

user@R3# show protocols
bgp {
  group internal {
    type internal;
  }
}
```



```
    local-address 192.168.3.1;
    export send-direct;
    neighbor 192.168.1.1;
    neighbor 192.168.2.1;
  }
  group external {
    type external;
    export send-direct;
    peer-as 4;
    neighbor 34.34.34.4;
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.3 {
      passive;
    }
    interface fe-1/2/0.5;
    interface fe-1/2/1.6;
  }
}

user@R3# show routing-options
autonomous-system 123;
router-id 192.168.3.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

### *Configuring Device R4*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R4:

1. Configure the interfaces.  
  
[edit interfaces fe-1/2/0 unit 7]  
user@R4# set family inet address 24.24.24.4/24  
  
[edit interfaces fe-1/2/1 unit 8]  
user@R4# set family inet address 34.34.34.4/24  
  
[edit interfaces lo0 unit 4]  
user@R4# set family inet address 192.168.4.1/32
2. Configure BGP.  
  
[edit protocols bgp group external]  
user@R4# set type external  
user@R4# set export send-direct  
user@R4# set peer-as 123  
user@R4# set neighbor 34.34.34.3  
user@R4# set neighbor 24.24.24.2
3. Configure a policy that accepts direct routes.





**NOTE:** Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R4# set from protocol direct
user@R4# set then accept
```

4. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R4# set autonomous-system 4
user@R4# set router-id 192.168.4.1
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R4# show interfaces
fe-1/2/0 {
  unit 7 {
    family inet {
      address 24.24.24.4/24;
    }
  }
}
fe-1/2/1 {
  unit 8 {
    family inet {
      address 34.34.34.4/24;
    }
  }
}
lo0 {
  unit 4 {
    family inet {
      address 192.168.4.1/32;
    }
  }
}

user@R4# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}

user@R4# show protocols
bgp {
  group external {
    type external;
  }
}
```



```
export send-direct;
peer-as 123;
neighbor 34.34.34.3;
neighbor 24.24.24.2;
}
}

user@R4# show routing-options
autonomous-system 4;
router-id 192.168.4.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

### **Verification**

Confirm that the configuration is working properly.

- [Checking the Active Path From Device R1 to Device R4 on page 2700](#)
- [Altering the Local Preference to Change the Path Selection on page 2701](#)
- [Rechecking the Active Path From Device R1 to Device R4 on page 2701](#)

### **Checking the Active Path From Device R1 to Device R4**

**Purpose** Verify that the active path from Device R1 to Device R4 goes through Device R2.

**Action** From operational mode, enter the **show route protocol bgp** command.

```
user@R1> show route protocol bgp
inet.0: 11 destinations, 18 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

12.12.12.0/24      [BGP/170] 00:11:48, localpref 100, from 192.168.2.1
                  AS path: I
                  > to 12.12.12.2 via fe-1/2/0.1
13.13.13.0/24      [BGP/170] 00:11:48, localpref 100, from 192.168.3.1
                  AS path: I
                  > to 13.13.13.3 via fe-1/2/1.2
24.24.24.0/24      [BGP/170] 00:11:48, localpref 100, from 192.168.2.1
                  AS path: I
                  > to 12.12.12.2 via fe-1/2/0.1
34.34.34.0/24      [BGP/170] 00:11:48, localpref 100, from 192.168.3.1
                  AS path: I
                  > to 13.13.13.3 via fe-1/2/1.2
192.168.2.1/32     [BGP/170] 00:11:48, localpref 100, from 192.168.2.1
                  AS path: I
                  > to 12.12.12.2 via fe-1/2/0.1
192.168.3.1/32     [BGP/170] 00:11:48, localpref 100, from 192.168.3.1
                  AS path: I
                  > to 13.13.13.3 via fe-1/2/1.2
192.168.4.1/32     *[BGP/170] 00:05:14, localpref 100, from 192.168.2.1
                  AS path: 4 I
                  > to 12.12.12.2 via fe-1/2/0.1
                  [BGP/170] 00:05:14, localpref 100, from 192.168.3.1
                  AS path: 4 I
                  > to 13.13.13.3 via fe-1/2/1.2
```



**Meaning** The asterisk (\*) shows that the preferred path is through Device R2. In the default configuration, Device R2 has a lower router ID than Device R3. The router ID is controlling the path selection.

#### *Altering the Local Preference to Change the Path Selection*

**Purpose** Change the path so that it goes through Device R3.

**Action** From configuration mode, enter the **set local-preference 300** command.

```
[edit protocols bgp group internal]
user@R3# set local-preference 300
user@R3# commit
```

#### *Rechecking the Active Path From Device R1 to Device R4*

**Purpose** Verify that the active path from Device R1 to Device R4 goes through Device R3.

**Action** From operational mode, enter the **show route protocol bgp** command.

```
user@R1> show route protocol bgp
inet.0: 11 destinations, 17 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

12.12.12.0/24      [BGP/170] 00:16:48, localpref 100, from 192.168.2.1
                  AS path: I
                  > to 12.12.12.2 via fe-1/2/0.1
13.13.13.0/24      [BGP/170] 00:00:22, localpref 300, from 192.168.3.1
                  AS path: I
                  > to 13.13.13.3 via fe-1/2/1.2
24.24.24.0/24      [BGP/170] 00:16:48, localpref 100, from 192.168.2.1
                  AS path: I
                  > to 12.12.12.2 via fe-1/2/0.1
34.34.34.0/24      [BGP/170] 00:00:22, localpref 300, from 192.168.3.1
                  AS path: I
                  > to 13.13.13.3 via fe-1/2/1.2
192.168.2.1/32      [BGP/170] 00:16:48, localpref 100, from 192.168.2.1
                  AS path: I
                  > to 12.12.12.2 via fe-1/2/0.1
192.168.3.1/32      [BGP/170] 00:00:22, localpref 300, from 192.168.3.1
                  AS path: I
                  > to 13.13.13.3 via fe-1/2/1.2
192.168.4.1/32      *[BGP/170] 00:00:21, localpref 300, from 192.168.3.1
                  AS path: 4 I
                  > to 13.13.13.3 via fe-1/2/1.2
```

**Meaning** The asterisk (\*) shows that the preferred path is through Device R3. In the altered configuration, Device R3 has a higher local preference than Device R2. The local preference is controlling the path selection.

**Related Documentation**

- [Examples: Configuring Internal BGP Peering on page 2666](#)
- [BGP Configuration Overview](#)



## Examples: Configuring BGP MED

- [Understanding the MED Attribute on page 2702](#)
- [Example: Configuring the MED Attribute Directly on page 2704](#)
- [Example: Configuring the MED Using Route Filters on page 2717](#)
- [Example: Configuring the MED Using Communities on page 2730](#)
- [Example: Associating the MED Path Attribute with the IGP Metric and Delaying MED Updates on page 2730](#)

---

### Understanding the MED Attribute

The BGP multiple exit discriminator (MED, or MULTI\_EXIT\_DISC) is a non-transitive attribute, meaning that it is not propagated throughout the Internet, but only to adjacent autonomous systems (ASs). The MED attribute is optional, meaning that it is not always sent with the BGP updates. The purpose of MED is to influence how other ASs enter your AS to reach a certain prefix.

The MED attribute has a value that is referred to as a *metric*. If all other factors in determining an exit point are equal, the exit point with the lowest metric is preferred.

If a MED is received over an external BGP link, it is propagated over internal links to other BGP-enabled devices within the AS.

BGP update messages include a MED metric if the route was learned from BGP and already had a MED metric associated with it, or if you configure the MED metric in the configuration file.

A MED metric is advertised with a route according to the following general rules:

- A more specific metric overrides a less specific metric. That is, a group-specific metric overrides a global BGP metric, and a peer-specific metric overrides a global BGP or group-specific metric.
- A metric defined with a routing policy overrides a metric defined with the **metric-out** statement.
- If any metric is defined, it overrides a metric received in a route.
- If the received route does not have an associated MED metric, and if you do not explicitly configure a metric value, no metric is advertised. When you do not explicitly configure a metric value, the MED value is equivalent to zero (0) when advertising an active route.

Because the AS path rather than the number of hops between hosts is the primary criterion for BGP route selection, an AS with multiple connections to a peer AS can have multiple equivalent AS paths. When the routing table contains two routes to the same host in a neighboring AS, an MED metric assigned to each route can determine which to include in the forwarding table. The MED metric you assign can force traffic through a particular exit point in an AS.

[Figure 57 on page 2703](#) illustrates how MED metrics are used to determine route selection.



Figure 57: Default MED Example

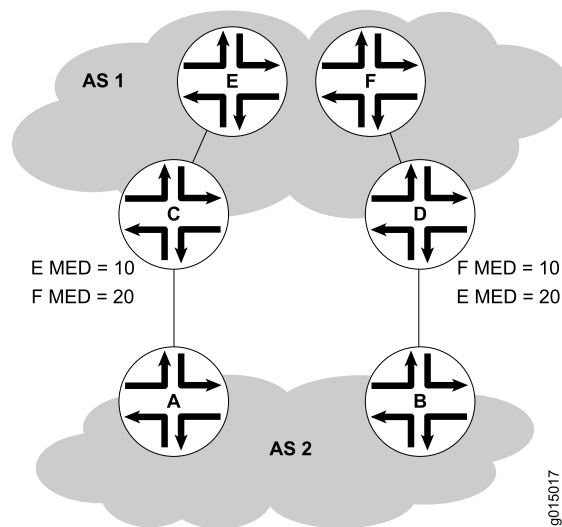


Figure 57 on page 2703 shows AS 1 and AS 2 connected by two separate BGP links to Routers C and D. Host E in AS 1 is located nearer to Router C. Host F, also in AS 1, is located nearer to Router D. Because the AS paths are equivalent, two routes exist for each host, one through Router C and one through Router D. To force all traffic destined for Host E through Router C, the network administrator for AS 2 assigns an MED metric for each router to Host E at its exit point. An MED metric of 10 is assigned to the route to Host E through Router C, and an MED metric of 20 is assigned to the route to Host E through Router D. BGP routers in AS 2 then select the route with the lower MED metric for the forwarding table.

By default, only the MEDs of routes that have the same peer ASs are compared. However, you can configure the routing table path selection options listed in Table 202 on page 2703 to compare MEDs in different ways. The MED options are not mutually exclusive and can be configured in combination or independently. For the MED options to take effect, you must configure them uniformly all through your network. The MED option or options you configure determine the route selected. Thus we recommend that you carefully evaluate your network for preferred routes before configuring the MED options.

Table 202: MED Options for Routing Table Path Selection

Option (Name)	Function	Use
Always comparing MEDs ( <b>always-compare-med</b> )	Ensures that the MEDs for paths from peers in different ASs are always compared in the route selection process.	Useful when all enterprises participating in a network agree on a uniform policy for setting MEDs. For example, in a network shared by two ISPs, both must agree that a certain path is the better path to configure the MED values correctly.



Table 202: MED Options for Routing Table Path Selection (*continued*)

Option (Name)	Function	Use
Adding IGP cost to MED ( <b>med-plus-igp</b> )	<p>Before comparing MED values for path selection, adds to the MED the cost of the IGP route to the BGP next-hop destination.</p> <p>This option replaces the MED value for the router, but does not affect the IGP metric comparison. As a result, when multiple routes have the same value after the MED-plus-IGP comparison, and route selection continues, the IGP route metric is also compared, even though it was added to the MED value and compared earlier in the selection process.</p>	Useful when the downstream AS requires the complete cost of a certain route that is received across multiple ASs.
Applying Cisco IOS nondeterministic behavior ( <b>cisco-non-deterministic</b> )	<p>Specifies the nondeterministic behavior of the Cisco IOS software:</p> <ul style="list-style-type: none"> <li>The active path is always first. All nonactive but eligible paths follow the active path and are maintained in the order in which they were received. Ineligible paths remain at the end of the list.</li> <li>When a new path is added to the routing table, path comparisons are made among all routes, including those paths that must never be selected because they lose the MED tie-breaking rule.</li> </ul>	We recommend that you do not configure this option, because the nondeterministic behavior sometimes prevents the system from properly comparing the MEDs between paths.

### Example: Configuring the MED Attribute Directly

This example shows how to configure a multiple exit discriminator (MED) metric to advertise in BGP update messages.

- [Requirements on page 2704](#)
- [Overview on page 2704](#)
- [Configuration on page 2706](#)
- [Verification on page 2716](#)

#### Requirements

No special configuration beyond device initialization is required before you configure this example.

#### Overview

To directly configure a MED metric to advertise in BGP update messages, include the **metric-out** statement:

```
metric-out (metric | minimum-igp offset | igp delay-med-update | offset);
```



**metric** is the primary metric on all routes sent to peers. It can be a value in the range from 0 through 4,294,967,295 ( $2^{32} - 1$ ).


The following optional settings are also supported:

- **minimum-igp**—Sets the metric to the minimum metric value calculated in the interior gateway protocol (IGP) to get to the BGP next hop. If a newly calculated metric is greater than the minimum metric value, the metric value remains unchanged. If a newly calculated metric is lower, the metric value is lowered to that value.
- **igp**—Sets the metric to the most recent metric value calculated in the IGP to get to the BGP next hop.
- **delay-med-update**—Delays sending MED updates when the MED value increases. Include the **delay-med-update** statement when you configure the **igp** statement. The default interval to delay sending updates, unless the MED is lower or another attribute associated with the route has changed is 10 minutes. Include the **med-igp-update-interval minutes** statement at the [edit routing-options] hierarchy level to modify the default interval.
- **offset**—Specifies a value for **offset** to increase or decrease the metric that is used from the metric value calculated in the IGP. The metric value is offset by the value specified. The metric calculated in the IGP (by specifying either **igp** or **igp-minimum**) is increased if the **offset** value is positive. The metric calculated in the IGP (by specifying either **igp** or **igp-minimum**) is decreased if the **offset** value is negative.

**offset** can be a value in the range from  $-2^{31}$  through  $2^{31} - 1$ . Note that the adjusted metric can never go below 0 or above  $2^{32} - 1$ .

Figure 58 on page 2705 shows a typical network with internal peer sessions and multiple exit points to a neighboring autonomous system (AS).

Figure 58: Typical Network with IBGP Sessions and Multiple Exit Points

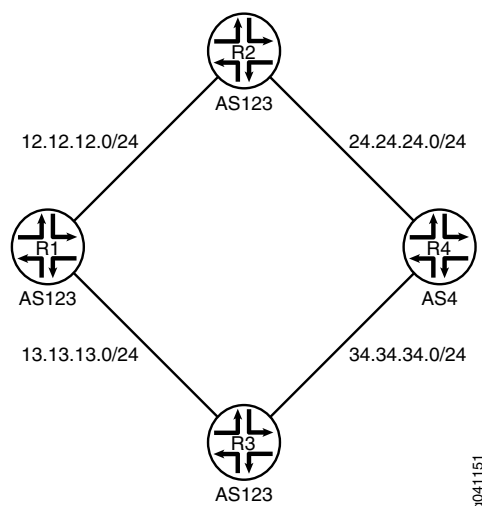

Device R4 has multiple loopback interfaces configured to simulate advertised prefixes. The extra loopback interface addresses are 44.44.44.44/32 and 144.144.144.144/32. This



example shows how to configure Device R4 to advertise a MED value of 30 to Device R3 and a MED value of 20 to Device R2. This causes all of the devices in AS 123 to prefer the path through Device R2 to reach AS 4.

### **Configuration**

- [Configuring Device R1 on page 2707](#)
- [Configuring Device R2 on page 2709](#)
- [Configuring Device R3 on page 2711](#)
- [Configuring Device R4 on page 2714](#)

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```
set interfaces fe-1/2/0 unit 1 family inet address 12.12.12.1/24
set interfaces fe-1/2/1 unit 2 family inet address 13.13.13.1/24
set interfaces lo0 unit 1 family inet address 192.168.1.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.1.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.2.1
set protocols bgp group internal neighbor 192.168.3.1
set protocols ospf area 0.0.0.0 interface lo0.1 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.1
set protocols ospf area 0.0.0.0 interface fe-1/2/1.2
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 123
set routing-options router-id 192.168.1.1
```

**Device R2**

```
set interfaces fe-1/2/0 unit 3 family inet address 12.12.12.2/24
set interfaces fe-1/2/1 unit 4 family inet address 24.24.24.2/24
set interfaces lo0 unit 2 family inet address 192.168.2.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.2.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.1.1
set protocols bgp group internal neighbor 192.168.3.1
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 4
set protocols bgp group external neighbor 24.24.24.4
set protocols ospf area 0.0.0.0 interface lo0.2 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.3
set protocols ospf area 0.0.0.0 interface fe-1/2/1.4
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 123
set routing-options router-id 192.168.2.1
```

**Device R3**

```
set interfaces fe-1/2/0 unit 5 family inet address 13.13.13.3/24
set interfaces fe-1/2/1 unit 6 family inet address 34.34.34.3/24
```



```

set interfaces lo0 unit 3 family inet address 192.168.3.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.3.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.1.1
set protocols bgp group internal neighbor 192.168.2.1
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 4
set protocols bgp group external neighbor 34.34.34.4
set protocols ospf area 0.0.0.0 interface lo0.3 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.5
set protocols ospf area 0.0.0.0 interface fe-1/2/1.6
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 123
set routing-options router-id 192.168.3.1

```

**Device R4**

```

set interfaces fe-1/2/0 unit 7 family inet address 24.24.24.4/24
set interfaces fe-1/2/1 unit 8 family inet address 34.34.34.4/24
set interfaces lo0 unit 4 family inet address 192.168.4.1/32
set interfaces lo0 unit 4 family inet address 44.44.44.44/32
set interfaces lo0 unit 4 family inet address 144.144.144.144/32
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 123
set protocols bgp group external neighbor 34.34.34.3 metric-out 30
set protocols bgp group external neighbor 24.24.24.2 metric-out 20
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 4
set routing-options router-id 192.168.4.1

```

**Configuring Device R1**

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure Device R1:

1. Configure the interfaces.
 

```

[edit interfaces fe-1/2/0 unit 1]
user@R1# set family inet address 12.12.12.1/24

[edit interfaces fe-1/2/1 unit 2]
user@R1# set family inet address 13.13.13.1/24

[edit interfaces lo0 unit 1]
user@R1# set family inet address 192.168.1.1/32

```
2. Configure BGP.
 

```

[edit protocols bgp group internal]
user@R1# set type internal

```



```
user@R1# set local-address 192.168.1.1
user@R1# set export send-direct
user@R1# set neighbor 192.168.2.1
user@R1# set neighbor 192.168.3.1
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R1# set interface lo0.1 passive
user@R1# set interface fe-1/2/0.1
user@R1# set interface fe-1/2/1.2
```

4. Configure a policy that accepts direct routes.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R1# set from protocol direct
user@R1# set then accept
```

5. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R1# set autonomous-system 123
user@R1# set router-id 192.168.1.1
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 1 {
    family inet {
      address 12.12.12.1/24;
    }
  }
}
fe-1/2/1 {
  unit 2 {
    family inet {
      address 13.13.13.1/24;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 192.168.1.1/32;
    }
  }
}

user@R1# show policy-options
policy-statement send-direct {
  term 1 {
```



```

        from protocol direct;
        then accept;
    }
}

user@R1# show protocols
bgp {
    group internal {
        type internal;
        local-address 192.168.1.1;
        export send-direct;
        neighbor 192.168.2.1;
        neighbor 192.168.3.1;
    }
}
ospf {
    area 0.0.0.0 {
        interface lo0.1 {
            passive;
        }
        interface fe-1/2/0.1;
        interface fe-1/2/1.2;
    }
}

user@R1# show routing-options
autonomous-system 123;
router-id 192.168.1.1;

```

If you are done configuring the device, enter **commit** from configuration mode.

### Configuring Device R2

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure Device R2:

1. Configure the interfaces.
 

```

[edit interfaces fe-1/2/0 unit 3]
user@R2# set family inet address 12.12.12.21/24

[edit interfaces fe-1/2/1 unit 4]
user@R2# set family inet address 24.24.24.2/24

[edit interfaces lo0 unit 2]
user@R2# set family inet address 192.168.2.1/32

```
2. Configure BGP.
 

```

[edit protocols bgp group internal]
user@R2# set type internal
user@R2# set local-address 192.168.2.1
user@R2# set export send-direct
user@R2# set neighbor 192.168.1.1

```



```
user@R2# set neighbor 192.168.3.1
```

```
[edit protocols bgp group external]
user@R2# set type external
user@R2# set export send-direct
user@R2# set peer-as 4
user@R2# set neighbor 24.24.24.4
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R2# set interface lo0.2 passive
user@R2# set interface fe-1/2/0.3
user@R2# set interface fe-1/2/1.4
```

4. Configure a policy that accepts direct routes.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R2# set from protocol direct
user@R2# set then accept
```

5. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R2# set autonomous-system 123
user@R2# set router-id 192.168.2.1
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R2# show interfaces
fe-1/2/0 {
  unit 3 {
    family inet {
      address 12.12.12.2/24;
    }
  }
}
fe-1/2/1 {
  unit 4 {
    family inet {
      address 24.24.24.2/24;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 192.168.2.1/32;
    }
  }
}
```



```

user@R2# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}

user@R2# show protocols
bgp {
  group internal {
    type internal;
    local-address 192.168.2.1;
    export send-direct;
    neighbor 192.168.1.1;
    neighbor 192.168.3.1;
  }
  group external {
    type external;
    export send-direct;
    peer-as 4;
    neighbor 24.24.24.4;
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.2 {
      passive;
    }
    interface fe-1/2/0.3;
    interface fe-1/2/1.4;
  }
}

user@R2# show routing-options
autonomous-system 123;
router-id 192.168.2.1;

```

If you are done configuring the device, enter **commit** from configuration mode.

### *Configuring Device R3*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure Device R3:

1. Configure the interfaces.
 

```

[edit interfaces fe-1/2/0 unit 5]
user@R3# set family inet address 13.13.13.3/24

[edit interfaces fe-1/2/1 unit 6]
user@R3# set family inet address 34.34.34.3/24

```



```
[edit interfaces lo0 unit 3]
user@R3# set family inet address 192.168.3.1/32
```

2. Configure BGP.

```
[edit protocols bgp group internal]
user@R3# set type internal
user@R3# set local-address 192.168.3.1
user@R3# set export send-direct
user@R3# set neighbor 192.168.1.1
user@R3# set neighbor 192.168.2.1
```

```
[edit protocols bgp group external]
user@R3# set type external
user@R3# set export send-direct
user@R3# set peer-as 4
user@R3# set neighbor 34.34.34.4
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R3# set interface lo0.3 passive
user@R3# set interface fe-1/2/0.5
user@R3# set interface fe-1/2/1.6
```

4. Configure a policy that accepts direct routes.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R3# set from protocol direct
user@R3# set then accept
```

5. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R3# set autonomous-system 123
user@R3# set router-id 192.168.3.1
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R3# show interfaces
fe-1/2/0 {
  unit 5 {
    family inet {
      address 13.13.13.3/24;
    }
  }
}
fe-1/2/1 {
  unit 6 {
    family inet {
      address 34.34.34.3/24;
    }
  }
}
```



```

    }
  }
  lo0 {
    unit 3 {
      family inet {
        address 192.168.3.1/32;
      }
    }
  }

user@R3# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}

user@R3# show protocols
bgp {
  group internal {
    type internal;
    local-address 192.168.3.1;
    export send-direct;
    neighbor 192.168.1.1;
    neighbor 192.168.2.1;
  }
  group external {
    type external;
    export send-direct;
    peer-as 4;
    neighbor 34.34.34.4;
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.3 {
      passive;
    }
    interface fe-1/2/0.5;
    interface fe-1/2/1.6;
  }
}

user@R3# show routing-options
autonomous-system 123;
router-id 192.168.3.1;

```

If you are done configuring the device, enter **commit** from configuration mode.



### *Configuring Device R4*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R4:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 7]
user@R4# set family inet address 24.24.24.4/24
```

```
[edit interfaces fe-1/2/1 unit 8]
user@R4# set family inet address 34.34.34.4/24
```

```
[edit interfaces lo0 unit 4]
user@R4# set family inet address 192.168.4.1/32
user@R4# set family inet address 44.44.44.44/32
user@R4# set family inet address 144.144.144.144/32
```

Device R4 has multiple loopback interface addresses to simulate advertised prefixes.

2. Configure a policy that accepts direct routes.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R4# set from protocol direct
user@R4# set then accept
```

3. Configure BGP.

```
[edit protocols bgp group external]
user@R4# set type external
user@R4# set export send-direct
user@R4# set peer-as 123
```

4. Configure a MED value of 30 for neighbor Device R3, and a MED value of 20 for neighbor Device R2.

```
[edit protocols bgp group external]
user@R4# set neighbor 34.34.34.3 metric-out 30
user@R4# set neighbor 24.24.24.2 metric-out 20
```

This configuration causes autonomous system (AS) 123 (of which Device R1, Device R2, and Device R3 are members) to prefer the path through Device R2 to reach AS 4.

5. Configure the router ID and AS number.

```
[edit routing-options]
user@R4# set autonomous-system 4
user@R4# set router-id 192.168.4.1
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output



does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R4# show interfaces
fe-1/2/0 {
  unit 7 {
    family inet {
      address 24.24.24.4/24;
    }
  }
}
fe-1/2/1 {
  unit 8 {
    family inet {
      address 34.34.34.4/24;
    }
  }
}
lo0 {
  unit 4 {
    family inet {
      address 192.168.4.1/32;
      address 44.44.44.44/32;
      address 144.144.144.144/32;
    }
  }
}

user@R4# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}

user@R4# show protocols
bgp {
  group external {
    type external;
    export send-direct;
    peer-as 123;
    neighbor 34.34.34.3 {
      metric-out 30;
    }
    neighbor 24.24.24.2 {
      metric-out 20;
    }
  }
}

user@R4# show routing-options
autonomous-system 4;
router-id 192.168.4.1;

```

If you are done configuring the device, enter **commit** from configuration mode.



**Verification**

Confirm that the configuration is working properly.

- [Checking the Active Path From Device R1 to Device R4 on page 2716](#)
- [Verifying That Device R4 Is Sending Its Routes Correctly on page 2716](#)

**Checking the Active Path From Device R1 to Device R4**

**Purpose** Verify that the active path goes through Device R2.

**Action** From operational mode, enter the **show route protocol bgp** command.

```
user@R1> show route protocol bgp
inet.0: 13 destinations, 19 routes (13 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

12.12.12.0/24      [BGP/170] 3d 22:52:38, localpref 100, from 192.168.2.1
                  AS path: I
                  > to 12.12.12.2 via fe-1/2/0.1
13.13.13.0/24      [BGP/170] 3d 03:15:16, localpref 100, from 192.168.3.1
                  AS path: I
                  > to 13.13.13.3 via fe-1/2/1.2
24.24.24.0/24      [BGP/170] 3d 22:52:38, localpref 100, from 192.168.2.1
                  AS path: I
                  > to 12.12.12.2 via fe-1/2/0.1
34.34.34.0/24      [BGP/170] 3d 03:15:16, localpref 100, from 192.168.3.1
                  AS path: I
                  > to 13.13.13.3 via fe-1/2/1.2
44.44.44.44/32     *[BGP/170] 01:41:11, MED 20, localpref 100, from 192.168.2.1
                  AS path: 4 I
                  > to 12.12.12.2 via fe-1/2/0.1
144.144.144.144/32 *[BGP/170] 00:08:13, MED 20, localpref 100, from 192.168.2.1
                  AS path: 4 I
                  > to 12.12.12.2 via fe-1/2/0.1
192.168.2.1/32      [BGP/170] 3d 22:52:38, localpref 100, from 192.168.2.1
                  AS path: I
                  > to 12.12.12.2 via fe-1/2/0.1
192.168.3.1/32      [BGP/170] 3d 03:15:16, localpref 100, from 192.168.3.1
                  AS path: I
                  > to 13.13.13.3 via fe-1/2/1.2
192.168.4.1/32     *[BGP/170] 01:41:11, MED 20, localpref 100, from 192.168.2.1
                  AS path: 4 I
                  > to 12.12.12.2 via fe-1/2/0.1
```

**Meaning** The asterisk (\*) shows that the preferred path is through Device R2. The reason for the path selection is listed as MED 20.

**Verifying That Device R4 Is Sending Its Routes Correctly**

**Purpose** Make sure that Device R4 is sending update messages with a value of 20 to Device R2 and a value of 30 to Device R3.

**Action** From operational mode, enter the **show route advertising-protocol bgp 24.24.24.2** command.

```
user@R4> show route advertising-protocol bgp 24.24.24.2
```



```
inet.0: 11 destinations, 13 routes (11 active, 0 holddown, 0 hidden)
  Prefix                Nexthop          MED      Lclpref    AS path
* 24.24.24.0/24         Self              20                I
* 34.34.34.0/24         Self              20                I
* 44.44.44.44/32        Self              20                I
* 144.144.144.144/32    Self              20                I
* 192.168.4.1/32        Self              20                I
```

```
user@R4> show route advertising-protocol bgp 34.34.34.3
inet.0: 11 destinations, 13 routes (11 active, 0 holddown, 0 hidden)
  Prefix                Nexthop          MED      Lclpref    AS path
* 24.24.24.0/24         Self              30                I
* 34.34.34.0/24         Self              30                I
* 44.44.44.44/32        Self              30                I
* 144.144.144.144/32    Self              30                I
* 192.168.4.1/32        Self              30                I
```

**Meaning** The MED column shows that Device R4 is sending the correct MED values to its two external BGP (EBGP) neighbors.

### Example: Configuring the MED Using Route Filters

This example shows how to configure a policy that uses route filters to modify the multiple exit discriminator (MED) metric to advertise in BGP update messages.

- [Requirements on page 2717](#)
- [Overview on page 2717](#)
- [Configuration on page 2718](#)
- [Verification on page 2728](#)

#### Requirements

No special configuration beyond device initialization is required before you configure this example.


#### Overview

To configure a route-filter policy that modifies the advertised MED metric in BGP update messages, include the **metric** statement in the policy action.

[Figure 59 on page 2718](#) shows a typical network with internal peer sessions and multiple exit points to a neighboring autonomous system (AS).



Figure 59: Typical Network with IBGP Sessions and Multiple Exit Points

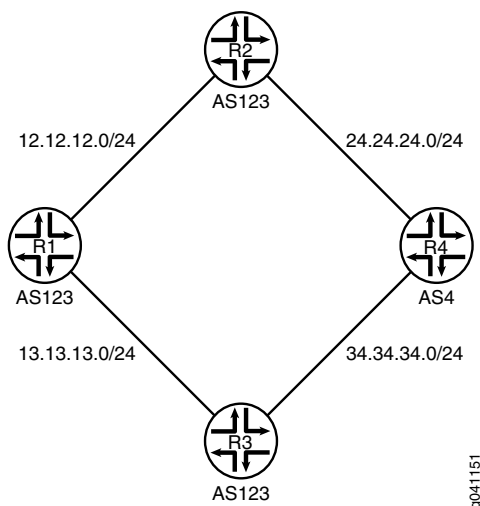

Device R4 has multiple loopback interfaces configured to simulate advertised prefixes. The extra loopback interface addresses are 44.44.44.44/32 and 144.144.144.144/32. This example shows how to configure Device R4 to advertise a MED value of 30 to Device R3 for all routes except 144.144.144.144. For 144.144.144.144, a MED value of 10 is advertised to Device 3. A MED value of 20 is advertised to Device R2, regardless of the route prefix.

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```

set interfaces fe-1/2/0 unit 1 family inet address 12.12.12.1/24
set interfaces fe-1/2/1 unit 2 family inet address 13.13.13.1/24
set interfaces lo0 unit 1 family inet address 192.168.1.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.1.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.2.1
set protocols bgp group internal neighbor 192.168.3.1
set protocols ospf area 0.0.0.0 interface lo0.1 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.1
set protocols ospf area 0.0.0.0 interface fe-1/2/1.2
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 123
set routing-options router-id 192.168.1.1
  
```

**Device R2**

```

set interfaces fe-1/2/0 unit 3 family inet address 12.12.12.2/24
set interfaces fe-1/2/1 unit 4 family inet address 24.24.24.2/24
set interfaces lo0 unit 2 family inet address 192.168.2.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.2.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.1.1
  
```



```

set protocols bgp group internal neighbor 192.168.3.1
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 4
set protocols bgp group external neighbor 24.24.24.4
set protocols ospf area 0.0.0.0 interface lo0.2 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.3
set protocols ospf area 0.0.0.0 interface fe-1/2/1.4
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 123
set routing-options router-id 192.168.2.1

```

**Device R3**

```

set interfaces fe-1/2/0 unit 5 family inet address 13.13.13.3/24
set interfaces fe-1/2/1 unit 6 family inet address 34.34.34.3/24
set interfaces lo0 unit 3 family inet address 192.168.3.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.3.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.1.1
set protocols bgp group internal neighbor 192.168.2.1
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 4
set protocols bgp group external neighbor 34.34.34.4
set protocols ospf area 0.0.0.0 interface lo0.3 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.5
set protocols ospf area 0.0.0.0 interface fe-1/2/1.6
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 123
set routing-options router-id 192.168.3.1

```

**Device R4**

```

set interfaces fe-1/2/0 unit 7 family inet address 24.24.24.4/24
set interfaces fe-1/2/1 unit 8 family inet address 34.34.34.4/24
set interfaces lo0 unit 4 family inet address 192.168.4.1/32
set interfaces lo0 unit 4 family inet address 44.44.44.44/32
set interfaces lo0 unit 4 family inet address 144.144.144.144/32
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 123
set protocols bgp group external neighbor 34.34.34.3 export med-10
set protocols bgp group external neighbor 34.34.34.3 export med-30
set protocols bgp group external neighbor 24.24.24.2 metric-out 20
set policy-options policy-statement med-10 from route-filter 144.144.144.144/32 exact
set policy-options policy-statement med-10 then metric 10
set policy-options policy-statement med-10 then accept
set policy-options policy-statement med-30 from route-filter 0.0.0.0/0 longer
set policy-options policy-statement med-30 then metric 30
set policy-options policy-statement med-30 then accept
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 4
set routing-options router-id 192.168.4.1

```



### *Configuring Device R1*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R1:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 1]
user@R1# set family inet address 12.12.12.1/24
```

```
[edit interfaces fe-1/2/1 unit 2]
user@R1# set family inet address 13.13.13.1/24
```

```
[edit interfaces lo0 unit 1]
user@R1# set family inet address 192.168.1.1/32
```

2. Configure BGP.

```
[edit protocols bgp group internal]
user@R1# set type internal
user@R1# set local-address 192.168.1.1
user@R1# set export send-direct
user@R1# set neighbor 192.168.2.1
user@R1# set neighbor 192.168.3.1
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R1# set interface lo0.1 passive
user@R1# set interface fe-1/2/0.1
user@R1# set interface fe-1/2/1.2
```

4. Configure a policy that accepts direct routes.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R1# set from protocol direct
user@R1# set then accept
```

5. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R1# set autonomous-system 123
user@R1# set router-id 192.168.1.1
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
```



```

    unit 1 {
        family inet {
            address 12.12.12.1/24;
        }
    }
}
fe-1/2/1 {
    unit 2 {
        family inet {
            address 13.13.13.1/24;
        }
    }
}
lo0 {
    unit 1 {
        family inet {
            address 192.168.1.1/32;
        }
    }
}

user@R1# show policy-options
policy-statement send-direct {
    term 1 {
        from protocol direct;
        then accept;
    }
}

user@R1# show protocols
bgp {
    group internal {
        type internal;
        local-address 192.168.1.1;
        export send-direct;
        neighbor 192.168.2.1;
        neighbor 192.168.3.1;
    }
}
ospf {
    area 0.0.0.0 {
        interface lo0.1 {
            passive;
        }
        interface fe-1/2/0.1;
        interface fe-1/2/1.2;
    }
}

user@R1# show routing-options
autonomous-system 123;
router-id 192.168.1.1;

```

If you are done configuring the device, enter **commit** from configuration mode.



### *Configuring Device R2*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R2:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 3]
user@R2# set family inet address 12.12.12.21/24
```

```
[edit interfaces fe-1/2/1 unit 4]
user@R2# set family inet address 24.24.24.2/24
```

```
[edit interfaces lo0 unit 2]
user@R2# set family inet address 192.168.2.1/32
```

2. Configure BGP.

```
[edit protocols bgp group internal]
user@R2# set type internal
user@R2# set local-address 192.168.2.1
user@R2# set export send-direct
user@R2# set neighbor 192.168.1.1
user@R2# set neighbor 192.168.3.1
```

```
[edit protocols bgp group external]
user@R2# set type external
user@R2# set export send-direct
user@R2# set peer-as 4
user@R2# set neighbor 24.24.24.4
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R2# set interface lo0.2 passive
user@R2# set interface fe-1/2/0.3
user@R2# set interface fe-1/2/1.4
```

4. Configure a policy that accepts direct routes.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R2# set from protocol direct
user@R2# set then accept
```

5. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R2# set autonomous-system 123
user@R2# set router-id 192.168.2.1
```



**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R2# show interfaces
fe-1/2/0 {
  unit 3 {
    family inet {
      address 12.12.12.2/24;
    }
  }
}
fe-1/2/1 {
  unit 4 {
    family inet {
      address 24.24.24.2/24;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 192.168.2.1/32;
    }
  }
}

user@R2# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}

user@R2# show protocols
bgp {
  group internal {
    type internal;
    local-address 192.168.2.1;
    export send-direct;
    neighbor 192.168.1.1;
    neighbor 192.168.3.1;
  }
  group external {
    type external;
    export send-direct;
    peer-as 4;
    neighbor 24.24.24.4;
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.2 {
      passive;
    }
  }
}

```



```
}
interface fe-1/2/0.3;
interface fe-1/2/1.4;
}
}

user@R2# show routing-options
autonomous-system 123;
router-id 192.168.2.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

### *Configuring Device R3*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R3:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 5]
user@R3# set family inet address 13.13.13.3/24
```

```
[edit interfaces fe-1/2/1 unit 6]
user@R3# set family inet address 34.34.34.3/24
```

```
[edit interfaces lo0 unit 3]
user@R3# set family inet address 192.168.3.1/32
```

2. Configure BGP.

```
[edit protocols bgp group internal]
user@R3# set type internal
user@R3# set local-address 192.168.3.1
user@R3# set export send-direct
user@R3# set neighbor 192.168.1.1
user@R3# set neighbor 192.168.2.1
```

```
[edit protocols bgp group external]
user@R3# set type external
user@R3# set export send-direct
user@R3# set peer-as 4
user@R3# set neighbor 34.34.34.4
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R3# set interface lo0.3 passive
user@R3# set interface fe-1/2/0.5
user@R3# set interface fe-1/2/1.6
```

4. Configure a policy that accepts direct routes.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.



```
[edit policy-options policy-statement send-direct term 1]
user@R3# set from protocol direct
user@R3# set then accept
```

5. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R3# set autonomous-system 123
user@R3# set router-id 192.168.3.1
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R3# show interfaces
fe-1/2/0 {
  unit 5 {
    family inet {
      address 13.13.13.3/24;
    }
  }
}
fe-1/2/1 {
  unit 6 {
    family inet {
      address 34.34.34.3/24;
    }
  }
}
lo0 {
  unit 3 {
    family inet {
      address 192.168.3.1/32;
    }
  }
}

user@R3# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}

user@R3# show protocols
bgp {
  group internal {
    type internal;
    local-address 192.168.3.1;
    export send-direct;
    neighbor 192.168.1.1;
    neighbor 192.168.2.1;
  }
  group external {
```



```
    type external;
    export send-direct;
    peer-as 4;
    neighbor 34.34.34.4;
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.3 {
      passive;
    }
    interface fe-1/2/0.5;
    interface fe-1/2/1.6;
  }
}
```

```
user@R3# show routing-options
autonomous-system 123;
router-id 192.168.3.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

### *Configuring Device R4*

#### **Step-by-Step Procedure**

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure Device R4:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 7]
user@R4# set family inet address 24.24.24.4/24
```

```
[edit interfaces fe-1/2/1 unit 8]
user@R4# set family inet address 34.34.34.4/24
```

```
[edit interfaces lo0 unit 4]
user@R4# set family inet address 192.168.4.1/32
user@R4# set family inet address 44.44.44.44/32
user@R4# set family inet address 144.144.144.144/32
```

Device R4 has multiple loopback interface addresses to simulate advertised prefixes.

2. Configure a policy that accepts direct routes.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R4# set from protocol direct
user@R4# set then accept
```

3. Configure BGP.

```
[edit protocols bgp group external]
user@R4# set type external
```



```

user@R4# set export send-direct
user@R4# set peer-as 123

```

4. Configure the two MED policies.

```

[edit policy-options]
set policy-statement med-10 from route-filter 144.144.144.144/32 exact
set policy-statement med-10 then metric 10
set policy-statement med-10 then accept
set policy-statement med-30 from route-filter 0.0.0.0/0 longer
set policy-statement med-30 then metric 30
set policy-statement med-30 then accept

```

5. Configure the two EBGP neighbors, applying the two MED policies to Device R3, and a MED value of 20 to Device R2.

```

[edit protocols bgp group external]
user@R4# set neighbor 34.34.34.3 export med-10
user@R4# set neighbor 34.34.34.3 export med-30
user@R4# set neighbor 24.24.24.2 metric-out 20

```

6. Configure the router ID and autonomous system (AS) number.

```

[edit routing-options]
user@R4# set autonomous-system 4
user@R4# set router-id 192.168.4.1

```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R4# show interfaces
fe-1/2/0 {
  unit 7 {
    family inet {
      address 24.24.24.4/24;
    }
  }
}
fe-1/2/1 {
  unit 8 {
    family inet {
      address 34.34.34.4/24;
    }
  }
}
lo0 {
  unit 4 {
    family inet {
      address 192.168.4.1/32;
      address 44.44.44.44/32;
      address 144.144.144.144/32;
    }
  }
}

```



```
user@R4# show policy-options
policy-statement med-10 {
  from {
    route-filter 144.144.144.144/32 exact;
  }
  then {
    metric 10;
    accept;
  }
}
policy-statement med-30 {
  from {
    route-filter 0.0.0.0/0 longer;
  }
  then {
    metric 30;
    accept;
  }
}
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}

user@R4# show protocols
bgp {
  group external {
    type external;
    export send-direct;
    peer-as 123;
    neighbor 24.24.24.2 {
      metric-out 20;
    }
    neighbor 34.34.34.3 {
      export [ med-10 med-30 ];
    }
  }
}

user@R4# show routing-options
autonomous-system 4;
router-id 192.168.4.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

### **Verification**

Confirm that the configuration is working properly.

- [Checking the Active Path From Device R1 to Device R4 on page 2728](#)
- [Verifying That Device R4 Is Sending Its Routes Correctly on page 2729](#)

### **Checking the Active Path From Device R1 to Device R4**

**Purpose** Verify that the active path goes through Device R2.



**Action** From operational mode, enter the **show route protocol bgp** command.

```

user@R1> show route protocol bgp
inet.0: 13 destinations, 19 routes (13 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

12.12.12.0/24      [BGP/170] 4d 01:13:32, localpref 100, from 192.168.2.1
                  AS path: I
                  > to 12.12.12.2 via fe-1/2/0.1
13.13.13.0/24      [BGP/170] 3d 05:36:10, localpref 100, from 192.168.3.1
                  AS path: I
                  > to 13.13.13.3 via fe-1/2/1.2
24.24.24.0/24      [BGP/170] 4d 01:13:32, localpref 100, from 192.168.2.1
                  AS path: I
                  > to 12.12.12.2 via fe-1/2/0.1
34.34.34.0/24      [BGP/170] 3d 05:36:10, localpref 100, from 192.168.3.1
                  AS path: I
                  > to 13.13.13.3 via fe-1/2/1.2
44.44.44.44/32     *[BGP/170] 00:06:03, MED 20, localpref 100, from 192.168.2.1
                  AS path: 4 I
                  > to 12.12.12.2 via fe-1/2/0.1
144.144.144.144/32 *[BGP/170] 00:06:03, MED 10, localpref 100, from 192.168.3.1
                  AS path: 4 I
                  > to 13.13.13.3 via fe-1/2/1.2
192.168.2.1/32     [BGP/170] 4d 01:13:32, localpref 100, from 192.168.2.1
                  AS path: I
                  > to 12.12.12.2 via fe-1/2/0.1
192.168.3.1/32     [BGP/170] 3d 05:36:10, localpref 100, from 192.168.3.1
                  AS path: I
                  > to 13.13.13.3 via fe-1/2/1.2
192.168.4.1/32     *[BGP/170] 00:06:03, MED 20, localpref 100, from 192.168.2.1
                  AS path: 4 I
                  > to 12.12.12.2 via fe-1/2/0.1

```

**Meaning** The output shows that the preferred path to the routes advertised by Device R4 is through Device R2 for all routes except 144.144.144.144/32. For 144.144.144.144/32, the preferred path is through Device R3.

### *Verifying That Device R4 Is Sending Its Routes Correctly*

**Purpose** Make sure that Device R4 is sending update messages with a value of 20 to Device R2 and a value of 30 to Device R3.

**Action** From operational mode, enter the **show route advertising-protocol bgp 24.24.24.2** command.

```

user@R4> show route advertising-protocol bgp 24.24.24.2
inet.0: 11 destinations, 13 routes (11 active, 0 holddown, 0 hidden)
  Prefix                Nexthop      MED      Lclpref  AS path
* 24.24.24.0/24         Self        20             I
* 34.34.34.0/24         Self        20             I
* 44.44.44.44/32        Self        20             I
* 144.144.144.144/32    Self        20             I
* 192.168.4.1/32        Self        20             I

```

```

user@R4> show route advertising-protocol bgp 34.34.34.3
inet.0: 11 destinations, 13 routes (11 active, 0 holddown, 0 hidden)
  Prefix                Nexthop      MED      Lclpref  AS path
* 24.24.24.0/24         Self        30             I

```



* 34.34.34.0/24	Self	30	I
* 44.44.44.44/32	Self	30	I
* 144.144.144.144/32	Self	10	I
* 192.168.4.1/32	Self	30	I

**Meaning** The MED column shows that Device R4 is sending the correct MED values to its two EBGp neighbors.

---

### Example: Configuring the MED Using Communities

Set the multiple exit discriminator (MED) metric to 20 for all routes from a particular community.

```
[edit]
routing-options {
  router-id 10.0.0.1;
  autonomous-system 23;
}
policy-options {
  policy-statement from-otago {
    from community otago;
    then metric 20;
  }
  community otago members [56:2379 23:46944];
}
protocols {
  bgp {
    import from-otago;
    group 23 {
      type external;
      peer-as 56;
      neighbor 192.168.0.1 {
        traceoptions {
          file bgp-log-peer;
          flag packets;
        }
        log-updown;
      }
    }
  }
}
```

---

### Example: Associating the MED Path Attribute with the IGP Metric and Delaying MED Updates

This example shows how to associate the multiple exit discriminator (MED) path attribute with the interior gateway protocol (IGP) metric, and configure a timer to delay update of the MED attribute.

- [Requirements on page 2731](#)
- [Overview on page 2731](#)
- [Configuration on page 2732](#)
- [Verification on page 2738](#)



### Requirements

No special configuration beyond device initialization is required before you configure this example.

### Overview

BGP can be configured to advertise the MED attribute for a route based on the IGP distance of its internal BGP (IBGP) route next-hop. The IGP metric enables internal routing to follow the shortest path according to the administrative setup. In some deployments, it might be ideal to communicate IGP shortest-path knowledge to external BGP (EBGP) peers in a neighboring autonomous system (AS). This allows those EBGP peers to forward traffic into your AS using the shortest paths possible.

Routes learned from an EBGP peer usually have a next hop on a directly connected interface, and thus the IGP value is equal to zero. Zero is the value advertised. The IGP metric is a nonzero value when a BGP peer sends third-party next hops that require the local system to perform next-hop resolution—IBGP configurations, configurations within confederation peers, or EBGP configurations that include the **multihop** command. In these scenarios, it might make sense to associate the MED value with the IGP metric by including the **metric-out minimum-igp** or **metric-out igp** option.

The drawback of associating the MED with the IGP metric is the risk of excessive route advertisements when there are IGP instabilities in the network. Configuring a delay for the MED update provides a mechanism to reduce route advertisements in such scenarios. The delay works by slowing down MED updates when the IGP metric for the next hop changes. The approach uses a timer to periodically advertise MED updates. When the timer expires, the MED attribute for routes with **metric-out igp delay-updates** configured is updated to the current IGP metric of the next hop. The BGP-enabled device sends out advertisements for routes for which the MED attribute has changed.

The **delay-updates** option identifies the BGP groups (or peers) for which the MED updates must be suppressed. The time for advertising MED updates is set to 10 minutes by default. You can increase the interval up to 600 minutes by including the **med-igp-update-interval** statement in the **routing-options** configuration.



**NOTE:** If you have nonstop active routing (NSR) enabled and a switchover occurs, the delayed MED updates might be advertised as soon as the switchover occurs.

When you configure the **metric-out igp** option, the IGP metric directly tracks the IGP cost to the IBGP peer. When the IGP cost goes down, so does the advertised MED value. Conversely, when the IGP cost goes up, the MED value goes up as well.


When you configure the **metric-out minimum-igp** option, the advertised MED value changes only when the IGP cost to the IBGP peer goes down. An increase in the IGP cost does not affect the MED value. The router monitors and remembers the lowest IGP cost until the routing process (rpd) is restarted. The BGP peer sends an update only if the MED is lower than the previously advertised value or another attribute associated with the route has changed, or if the BGP peer is responding to a refresh route request.



This example uses the **metric** statement in the OSPF configuration to demonstrate that when the IGP metric changes, the MED also changes after the configured delay interval. The OSPF metric can range from 1 through 65,535.

Figure 60 on page 2732 shows the sample topology.

**Figure 60: Topology for Delaying the MED Update**

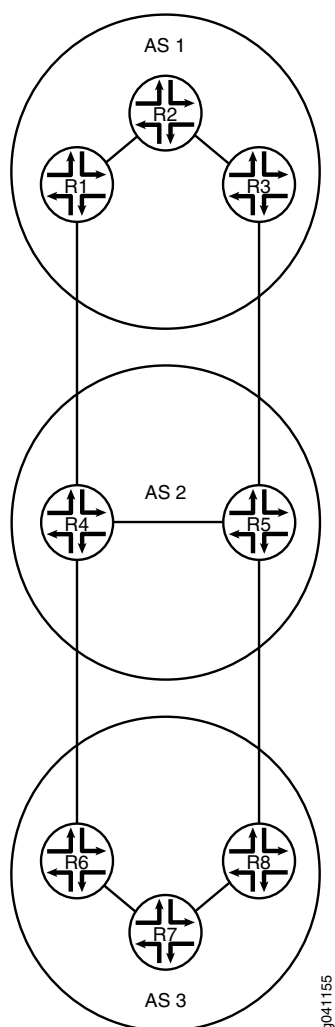

In this example, the MED value advertised by Device R1 is associated with the IGP running in AS 1. The MED value advertised by Device R1 impacts the decisions of the neighboring AS (AS 2) when AS 2 is forwarding traffic into AS 1.

#### Configuration

- [Configuring Device R1 on page 2736](#)

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.



```

Device R1    set interfaces fe-1/2/0 unit 2 description R1->R2
              set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.1/30
              set interfaces fe-1/2/1 unit 7 description R1->R4
              set interfaces fe-1/2/1 unit 7 family inet address 172.16.0.1/30
              set interfaces lo0 unit 1 family inet address 192.168.0.1/32
              set protocols bgp group internal type internal
              set protocols bgp group internal local-address 192.168.0.1
              set protocols bgp group internal export send-direct
              set protocols bgp group internal neighbor 192.168.0.2
              set protocols bgp group internal neighbor 192.168.0.3
              set protocols bgp group external type external
              set protocols bgp group external metric-out igp delay-med-update
              set protocols bgp group external export send-direct
              set protocols bgp group external peer-as 2
              set protocols bgp group external neighbor 172.16.0.2
              set protocols ospf area 0.0.0.0 interface fe-1/2/0.2 metric 600
              set protocols ospf area 0.0.0.0 interface lo0.1 passive
              set policy-options policy-statement send-direct term 1 from protocol direct
              set policy-options policy-statement send-direct term 1 then accept
              set routing-options med-igp-update-interval 12
              set routing-options router-id 192.168.0.1
              set routing-options autonomous-system 1

Device R2    set interfaces fe-1/2/0 unit 1 description R2->R1
              set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.2/30
              set interfaces fe-1/2/1 unit 4 description R2->R3
              set interfaces fe-1/2/1 unit 4 family inet address 10.0.2.2/30
              set interfaces lo0 unit 2 family inet address 192.168.0.2/32
              set protocols bgp group internal type internal
              set protocols bgp group internal local-address 192.168.0.2
              set protocols bgp group internal export send-direct
              set protocols bgp group internal neighbor 192.168.0.1
              set protocols bgp group internal neighbor 192.168.0.3
              set protocols ospf area 0.0.0.0 interface fe-1/2/0.1
              set protocols ospf area 0.0.0.0 interface fe-1/2/1.4
              set protocols ospf area 0.0.0.0 interface lo0.2 passive
              set policy-options policy-statement send-direct term 1 from protocol direct
              set policy-options policy-statement send-direct term 1 then accept
              set routing-options router-id 192.168.0.2
              set routing-options autonomous-system 1

Device R3    set interfaces fe-1/2/0 unit 3 description R3->R2
              set interfaces fe-1/2/0 unit 3 family inet address 10.0.2.1/30
              set interfaces fe-1/2/1 unit 5 description R3->R5
              set interfaces fe-1/2/1 unit 5 family inet address 172.16.0.5/30
              set interfaces lo0 unit 3 family inet address 192.168.0.3/32
              set protocols bgp group internal type internal
              set protocols bgp group internal local-address 192.168.0.3
              set protocols bgp group internal export send-direct
              set protocols bgp group internal neighbor 192.168.0.1
              set protocols bgp group internal neighbor 192.168.0.2
              set protocols bgp group external type external
              set protocols bgp group external export send-direct
              set protocols bgp group external peer-as 2
              set protocols bgp group external neighbor 172.16.0.6

```



```
set protocols ospf area 0.0.0.0 interface fe-1/2/0.3
set protocols ospf area 0.0.0.0 interface lo0.3 passive
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options router-id 192.168.0.3
set routing-options autonomous-system 1
```

Device R4

```
set interfaces fe-1/2/0 unit 8 description R4->R1
set interfaces fe-1/2/0 unit 8 family inet address 172.16.0.2/30
set interfaces fe-1/2/1 unit 9 description R4->R5
set interfaces fe-1/2/1 unit 9 family inet address 10.0.4.1/30
set interfaces fe-1/2/2 unit 13 description R4->R6
set interfaces fe-1/2/2 unit 13 family inet address 172.16.0.9/30
set interfaces lo0 unit 4 family inet address 192.168.0.4/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.0.4
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.0.5
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external neighbor 172.16.0.10 peer-as 3
set protocols bgp group external neighbor 172.16.0.1 peer-as 1
set protocols ospf area 0.0.0.0 interface fe-1/2/1.9
set protocols ospf area 0.0.0.0 interface lo0.4 passive
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options router-id 192.168.0.4
set routing-options autonomous-system 2
```

Device R5

```
set interfaces fe-1/2/0 unit 6 description R5->R3
set interfaces fe-1/2/0 unit 6 family inet address 172.16.0.6/30
set interfaces fe-1/2/1 unit 10 description R5->R4
set interfaces fe-1/2/1 unit 10 family inet address 10.0.4.2/30
set interfaces fe-1/2/2 unit 11 description R5->R8
set interfaces fe-1/2/2 unit 11 family inet address 172.16.0.13/30
set interfaces lo0 unit 5 family inet address 192.168.0.5/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.0.5
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.0.4
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external neighbor 172.16.0.5 peer-as 1
set protocols bgp group external neighbor 172.16.0.14 peer-as 3
set protocols ospf area 0.0.0.0 interface fe-1/2/1.10
set protocols ospf area 0.0.0.0 interface lo0.5 passive
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options router-id 192.168.0.5
set routing-options autonomous-system 2
```

Device R6

```
set interfaces fe-1/2/0 unit 14 description R6->R4
set interfaces fe-1/2/0 unit 14 family inet address 172.16.0.10/30
set interfaces fe-1/2/1 unit 15 description R6->R7
set interfaces fe-1/2/1 unit 15 family inet address 10.0.6.1/30
```



```

set interfaces lo0 unit 6 family inet address 192.168.0.6/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.0.6
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.0.7
set protocols bgp group internal neighbor 192.168.0.8
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 2
set protocols bgp group external neighbor 172.16.0.9 peer-as 2
set protocols ospf area 0.0.0.0 interface fe-1/2/1.15
set protocols ospf area 0.0.0.0 interface lo0.6 passive
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options router-id 192.168.0.6
set routing-options autonomous-system 3

```

**Device R7**

```

set interfaces fe-1/2/0 unit 16 description R7->R6
set interfaces fe-1/2/0 unit 16 family inet address 10.0.6.2/30
set interfaces fe-1/2/1 unit 17 description R7->R8
set interfaces fe-1/2/1 unit 17 family inet address 10.0.7.2/30
set interfaces lo0 unit 7 family inet address 192.168.0.7/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.0.7
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.0.6
set protocols bgp group internal neighbor 192.168.0.8
set protocols ospf area 0.0.0.0 interface fe-1/2/0.16
set protocols ospf area 0.0.0.0 interface fe-1/2/1.17
set protocols ospf area 0.0.0.0 interface lo0.7 passive
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options router-id 192.168.0.7
set routing-options autonomous-system 3

```

**Device R8**

```

set interfaces fe-1/2/0 unit 12 description R8->R5
set interfaces fe-1/2/0 unit 12 family inet address 172.16.0.14/30
set interfaces fe-1/2/1 unit 18 description R8->R7
set interfaces fe-1/2/1 unit 18 family inet address 10.0.7.1/30
set interfaces lo0 unit 8 family inet address 192.168.0.8/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.0.8
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.0.6
set protocols bgp group internal neighbor 192.168.0.7
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 2
set protocols bgp group external neighbor 172.16.0.13 peer-as 2
set protocols ospf area 0.0.0.0 interface fe-1/2/1.18
set protocols ospf area 0.0.0.0 interface lo0.8 passive
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options router-id 192.168.0.8
set routing-options autonomous-system 3

```



### *Configuring Device R1*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R1:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 2]
user@R1# set description R1->R2
user@R1# set family inet address 10.0.0.1/30
```

```
[edit interfaces fe-1/2/1 unit 7]
user@R1# set description R1->R4
user@R1# set family inet address 172.16.0.1/30
```

```
[edit interfaces lo0 unit 1]
user@R1# set family inet address 192.168.0.1/32
```

2. Configure IBGP.

```
[edit protocols bgp group internal]
user@R1# set type internal
user@R1# set local-address 192.168.0.1
user@R1# set export send-direct
user@R1# set neighbor 192.168.0.2
user@R1# set neighbor 192.168.0.3
```

3. Configure EBGp.

```
[edit protocols bgp group external]
user@R1# set type external
user@R1# set export send-direct
user@R1# set peer-as 2
user@R1# set neighbor 172.16.0.2
```

4. Associate the MED value with the IGP metric.

```
[edit protocols bgp group external]
user@R1# set metric-out igp delay-med-update
```

The default for the MED update is 10 minutes when you include the **delay-med-update** option. When you exclude the **delay-med-update** option, the MED update occurs immediately after the IGP metric changes.

5. (Optional) Configure the update interval for the MED update.

```
[edit routing-options]
user@R1# set med-igp-update-interval 12
```

You can configure the interval from 10 minutes through 600 minutes.

6. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R1# set interface fe-1/2/0.2 metric 600
user@R1# set interface lo0.1 passive
```



The **metric** statement is used here to demonstrate what happens when the IGP metric changes.

7. Configure a policy that accepts direct routes.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R1# set from protocol direct
user@R1# set then accept
```

8. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R1# set router-id 192.168.0.1
user@R1# set autonomous-system 1
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 2 {
    description R1->R2;
    family inet {
      address 10.0.0.1/30;
    }
  }
}
fe-1/2/1 {
  unit 7 {
    description R1->R4;
    family inet {
      address 172.16.0.1/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 192.168.0.1/32;
    }
  }
}

user@R1# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}

user@R1# show protocols
```



```

bgp {
  group internal {
    type internal;
    local-address 192.168.0.1;
    export send-direct;
    neighbor 192.168.0.2;
    neighbor 192.168.0.3;
  }
  group external {
    type external;
    metric-out igp delay-med-update;
    export send-direct;
    peer-as 2;
    neighbor 172.16.0.2;
  }
}
ospf {
  area 0.0.0.0 {
    interface fe-1/2/0.2 {
      metric 600;
    }
    interface lo0.1 {
      passive;
    }
  }
}

```

```

user@R1# show routing-options
med-igp-update-interval 12;
router-id 192.168.0.1;
autonomous-system 1;

```

If you are done configuring the device, enter **commit** from configuration mode. Repeat the configuration steps on the other devices in the topology, as needed for your network.

### Verification

Confirm that the configuration is working properly.

- [Checking the BGP Advertisements on page 2738](#)
- [Verifying That the MED Value Changes When the OSPF Metric Changes on page 2739](#)
- [Testing the minimum-igp Setting on page 2739](#)

### Checking the BGP Advertisements

**Purpose** Verify that Device R1 is advertising to Device R4 a BGP MED value that reflects the IGP metric.

**Action** From operational mode, enter the **show route advertising-protocol bgp** command.

```

user@R1> show route advertising-protocol bgp 172.16.0.2
inet.0: 19 destinations, 33 routes (19 active, 0 holddown, 0 hidden)
  Prefix                Nexthop        MED      Lc1pref  AS path
* 10.0.0.0/30           Self           0         I         I
* 172.16.0.0/30         Self           0         I         I

```



* 172.16.0.4/30	Self	601	I
* 192.168.0.1/32	Self	0	I

**Meaning** The 601 value in the MED column shows that the MED value has been updated to reflect the configured OSPF metric.

#### *Verifying That the MED Value Changes When the OSPF Metric Changes*

**Purpose** Make sure that when you raise the OSPF metric to 700, the MED value is updated to reflect this change.

**Action** From configuration mode, enter the **set protocols ospf area 0 interface fe-1/2/0.2 metric 700** command.

```
user@R1# set protocols ospf area 0 interface fe-1/2/0.2 metric 700
user@R1# commit
```

After waiting 12 minutes (the configured delay period), enter the **show route advertising-protocol bgp** command from operational mode.

```
user@R1> show route advertising-protocol bgp 172.16.0.2
inet.0: 19 destinations, 33 routes (19 active, 0 holddown, 0 hidden)
  Prefix            Nexthop      MED      Lclpref  AS path
* 10.0.0.0/30       Self         0         I
* 172.16.0.0/30     Self         0         I
* 172.16.0.4/30     Self        701         I
* 192.168.0.1/32    Self         0         I
```

**Meaning** The 701 value in the MED column shows that the MED value has been updated to reflect the configured OSPF metric.

#### *Testing the minimum-igp Setting*

**Purpose** Change the configuration to use the **minimum-igp** statement instead of the **igp** statement. When you increase the OSPF metric, the MED value remains unchanged, but when you decrease the OSPF metric, the MED value reflects the new OSPF metric.

**Action** From configuration mode, delete the **igp** statement, add the **minimum-igp** statement, and increase the OSPF metric.

```
user@R1# delete protocols bgp group external metric-out igp
user@R1# set protocols bgp group external metric-out minimum-igp
user@R1# set protocols ospf area 0 interface fe-1/2/0.2 metric 800
user@R1# commit
```

From operational mode, enter the **show route advertising-protocol bgp** command to make sure that the MED value does not change.

```
user@R1> show route advertising-protocol bgp 172.16.0.2
inet.0: 19 destinations, 33 routes (19 active, 0 holddown, 0 hidden)
  Prefix            Nexthop      MED      Lclpref  AS path
* 10.0.0.0/30       Self         0         I
* 172.16.0.0/30     Self         0         I
* 172.16.0.4/30     Self        701         I
* 192.168.0.1/32    Self         0         I
```



From configuration mode, decrease the OSPF metric.

```
user@R1# set protocols ospf area 0 interface fe-1/2/0.2 metric 20
user@R1# commit
```

From operational mode, enter the **show route advertising-protocol bgp** command to make sure that the MED value does change.

```
user@R1> show route advertising-protocol bgp 172.16.0.2
inet.0: 19 destinations, 33 routes (19 active, 0 holddown, 0 hidden)
  Prefix                Nexthop          MED      Lclpref    AS path
* 10.0.0.0/30           Self             0                I
* 172.16.0.0/30         Self             0                I
* 172.16.0.4/30         Self             21               I
* 192.168.0.1/32        Self             0                I
```

**Meaning** When the **minimum-igp** statement is configured, the MED value changes only when a shorter path is available.

**Related Documentation**

- [Examples: Configuring External BGP Peering on page 2643](#)
- [BGP Configuration Overview](#)

## Examples: Configuring BGP Local AS

- [Understanding the BGP Local AS Attribute on page 2740](#)
- [Example: Configuring a Local AS for EBGp Sessions on page 2745](#)
- [Example: Configuring a Private Local AS for EBGp Sessions on page 2755](#)

### Understanding the BGP Local AS Attribute

When an Internet service provider (ISP) acquires a network that belongs to a different autonomous system (AS), there is no seamless method for moving the BGP peers of the acquired network to the AS of the acquiring ISP. The process of configuring the BGP peers with the new AS number can be time-consuming and cumbersome. Sometimes customers do not want to or are not immediately able to modify their peer arrangements or configuration. During this kind of transition period, it can be useful to configure BGP-enabled devices in the new AS to use the former AS number in BGP updates. This former AS number is called a *local AS*.

Using a local AS number permits the routing devices in an acquired network to appear to belong to the former AS.

For example, ISP A, with an AS of 200, acquires ISP B, with an AS of 250. ISP B has a customer, ISP C, that does not want to change its configuration. After ISP B becomes part of ISP A, a local AS number of 250 is configured for use in EBGp peer sessions with ISP C. Consequently, the local AS number of 250 is either prepended before or used instead of the global AS number of 200 in the AS path used to export routes to direct external peers in ISP C.

If the route is received from an internal BGP (IBGP) peer, the AS path includes the local AS number prepended before the global AS number.



The local AS number is used instead of the global AS number if the route is an external route, such as a static route or an interior gateway protocol (IGP) route that is imported into BGP. If the route is external and you want the global AS number to be included in the AS path, you can apply a routing policy that uses **as-path-expand** or **as-path-prepend**. Use the **as-path-expand** policy action to place the global AS number behind the local AS number. Use the **as-path-prepend** policy action to place the global AS number in front of the local AS number.

For example:

```

user@R2# show policy-options
policy-statement prepend-global {
  term 1 {
    from protocol static;
    then {
      as-path-prepend 200; # or use as-path-expand
      accept;
    }
  }
}

user@R2# show protocols bgp
group ext {
  export prepend-global;
  type external;
  local-as 250;
  neighbor 10.0.0.1 {
    peer-as 100;
  }
  neighbor 10.1.0.2 {
    peer-as 300;
  }
}

user@R2# show routing-options
static {
  route 1.1.1.1/32 next-hop 10.0.0.1;
}
autonomous-system 200;

user@R3# run show route 1.1.1.1 protocol bgp
inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1.1.1.1/32          *[BGP/170] 00:05:11, localpref 100
                   AS path: 200 250 I, validation-state: unverified
                   > to 10.1.0.1 via lt-1/2/0.4

```

In a Layer 3 VPN scenario, in which a provider edge (PE) device uses external BGP (EBGP) to peer with a customer edge (CE) device, the **local-as** statement behaves differently than in the non-VPN scenario. In the VPN scenario, the global AS number defined in the master instance is prepended to the AS path by default. To override this behavior, you can configure the **no-prepend-global-as** in the routing-instance BGP configuration on the PE device, as shown here:

```

user@R2# show routing-instances

```



```
red {
  instance-type vrf;
  interface fe-1/2/0.2;
  route-distinguisher 2:1;
  vrf-target target:2:1;
  protocols {
    bgp {
      group toR1 {
        type external;
        peer-as 1;
        local-as 200 no-prepend-global-as;
        neighbor 10.1.1.1;
      }
    }
  }
}
```

The Junos operating system (Junos OS) implementation of the local AS attribute supports the following options:




- **Local AS with private option**—When you use the **private** option, the local AS is used during the establishment of the BGP session with an EBGP neighbor but is hidden in the AS path sent to other EBGP peers. Only the global AS is included in the AS path sent to external peers.

The **private** option is useful for establishing local peering with routing devices that remain configured with their former AS or with a specific customer that has not yet modified its peer arrangements. The local AS is used to establish the BGP session with the EBGP neighbor but is hidden in the AS path sent to external peers in another AS.

Include the **private** option so that the local AS is not prepended before the global AS in the AS path sent to external peers. When you specify the **private** option, the local AS is prepended only in the AS path sent to the EBGP neighbor.

For example, in [Figure 61 on page 2743](#), Router 1 and Router 2 are in AS 64496, Router 4 is in AS 64511, and Router 3 is in AS 64510. Router 2 formerly belonged to AS 64497, which has merged with another network and now belongs to AS 64496. Because Router 3 still peers with Router 2 using its former AS (64497), Router 2 needs to be configured with a local AS of 64497 in order to maintain peering with Router 3. Configuring a local AS of 64497 permits Router 2 to add AS 64497 when advertising routes to Router 3. Router 3 sees an AS path of 64497 64496 for the prefix 10/8.

**Figure 61: Local AS Configuration**

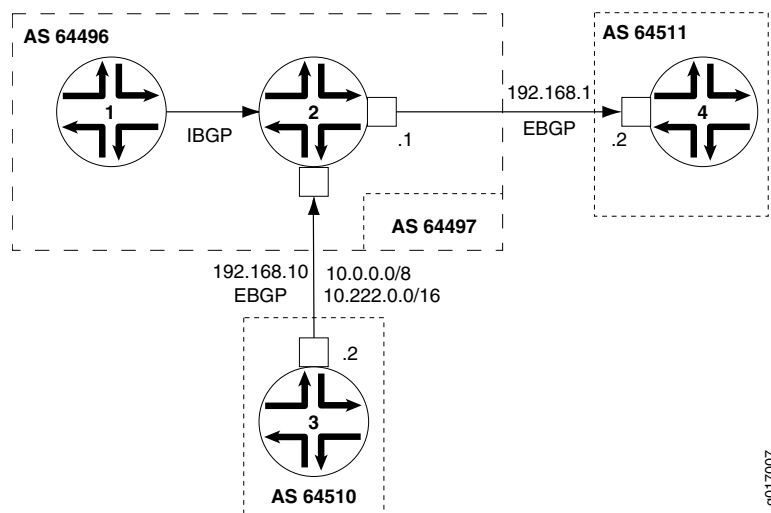

To prevent Router 2 from adding the local AS number in its announcements to other peers, use the **local-as 64497 private** statement. This statement configures Router 2 to not include local AS 64497 when announcing routes to Router 1 and to Router 4. In this case, Router 4 sees an AS path of 64496 64510 for the prefix 10.222/16.

- **Local AS with alias option**—In Junos OS Release 9.5 and later, you can configure a local AS as an alias. During the establishment of the BGP open session, the AS used in the open message alternates between the local AS and the global AS. If the local AS is used to connect with the EBGP neighbor, then only the local AS is prepended to the AS path when the BGP peer session is established. If the global AS is used to connect with the EBGP neighbor, then only the global AS is prepended to the AS path when the BGP peer session is established. The use of the **alias** option also means that



the local AS is not prepended to the AS path for any routes learned from that EBGp neighbor. Therefore, the local AS remains hidden from other external peers.

Configuring a local AS with the **alias** option is especially useful when you are migrating the routing devices in an acquired network to the new AS. During the migration process, some routing devices might be configured with the new AS while others remain configured with the former AS. For example, it is good practice to start by first migrating to the new AS any routing devices that function as route reflectors. However, as you migrate the route reflector clients incrementally, each route reflector has to peer with routing devices configured with the former AS, as well as peer with routing devices configured with the new AS. To establish local peer sessions, it can be useful for the BGP peers in the network to use both the local AS and the global AS. At the same time, you want to hide this local AS from external peers and use only the global AS in the AS path when exporting routes to another AS. In this kind of situation, configure the **alias** option.

Include the **alias** option to configure the local AS as an alias to the global AS configured at the **[edit routing-options]** hierarchy level. When you configure a local AS as an alias, during the establishment of the BGP open session, the AS used in the open message alternates between the local AS and the global AS. The local AS is prepended to the AS path only when the peer session with an EBGp neighbor is established using that local AS. The local AS is hidden in the AS path sent to any other external peers. Only the global AS is prepended to the AS path when the BGP session is established using the global AS.



**NOTE:** The **private** and **alias** options are mutually exclusive. You cannot configure both options with the same **local-as** statement.

---

- **Local AS with option not to prepend the global AS**—In Junos OS Release 9.6 and later, you can configure a local AS with the option not to prepend the global AS. Only the local AS is included in the AS path sent to external peers.

Use the **no-prepend-global-as** option when you want to strip the global AS number from outbound BGP updates in a virtual private network (VPN) scenario. This option is useful in a VPN scenario in which you want to hide the global AS from the VPN.

Include the **no-prepend-global-as** option to have the global AS configured at the **[edit routing-options]** hierarchy level removed from the AS path sent to external peers. When you use this option, only the local AS is included in the AS path for the routes sent to a customer edge (CE) device.

- **Number of loops option**—The local AS feature also supports specifying the number of times that detection of the AS number in the AS\_PATH attribute causes the route to be discarded or hidden. For example, if you configure **loops 1**, the route is hidden if the AS number is detected in the path one or more times. This is the default behavior. If you configure **loops 2**, the route is hidden if the AS number is detected in the path two or more times.

For the **loops number** statement, you can configure 1 through 10.





**NOTE:** If you configure the local AS values for any BGP group, the detection of routing loops is performed using both the AS and the local AS values for all BGP groups.

If the local AS for the EBGP or IBGP peer is the same as the current AS, do not use the `local-as` statement to specify the local AS number.

When you configure the local AS within a VRF, this impacts the AS path loop-detection mechanism. All of the `local-as` statements configured on the device are part of a single AS domain. The AS path loop-detection mechanism is based on looking for a matching AS present in the domain.

### Example: Configuring a Local AS for EBGP Sessions

This example shows how to configure a local autonomous system (AS) for a BGP peer so that both the global AS and the local AS are used in BGP inbound and outbound updates.

- [Requirements on page 2745](#)
- [Overview on page 2745](#)
- [Configuration on page 2746](#)
- [Verification on page 2752](#)

#### Requirements

No special configuration beyond device initialization is required before you configure this example.

#### Overview

Use the `local-as` statement when ISPs merge and want to preserve a customer's configuration, particularly the AS with which the customer is configured to establish a peer relationship. The `local-as` statement simulates the AS number already in place in customer routers, even if the ISP's router has moved to a different AS.

This example shows how to use the `local-as` statement to configure a local AS. The `local-as` statement is supported for BGP at the global, group, and neighbor hierarchy levels.


When you configure the `local-as` statement, you must specify an AS number. You can specify a number from 1 through 4,294,967,295 in plain-number format. In Junos OS Release 9.1 and later, the range for AS numbers is extended to provide BGP support for 4-byte AS numbers as defined in RFC 4893, *BGP Support for Four-octet AS Number Space*. In Junos OS Release 9.3 and later, you can also configure a 4-byte AS number using the AS-dot notation format of two integer values joined by a period: *<16-bit high-order value in decimal>.<16-bit low-order value in decimal>*. For example, the 4-byte AS number of 65,546 in plain-number format is represented as 1.10 in the AS-dot notation format. You can specify a value from 0.0 through 65535.65535 in AS-dot notation format. Junos



OS continues to support 2-byte AS numbers. The 2-byte AS number range is 1 through 65,535 (this is a subset of the 4-byte range).

Figure 62 on page 2746 shows the sample topology.

**Figure 62: Topology for Configuring the Local AS**

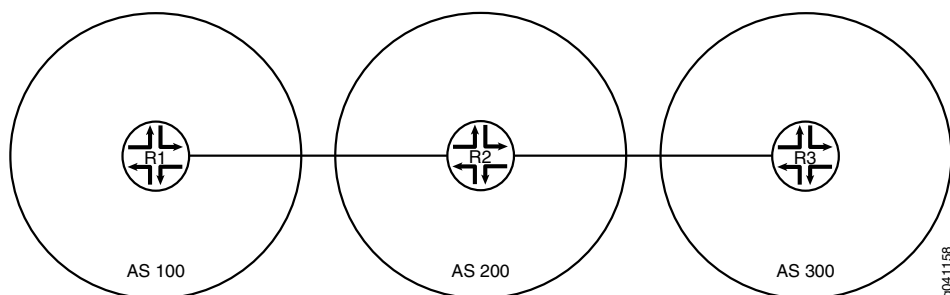

In this example, Device R2 formerly belonged to AS 250 and now is in AS 200. Device R1 and Device R3 are configured to peer with AS 250 instead of with the new AS number (AS 200). Device R2 has the new AS number configured with the **autonomous-system 200** statement. To enable the peering sessions to work, the **local-as 250** statement is added in the BGP configuration. Because **local-as 250** is configured, Device R2 includes both the global AS (200) and the local AS (250) in its BGP inbound and outbound updates.

#### Configuration

- [Configuring Device R1 on page 2747](#)
- [Configuring Device R2 on page 2749](#)
- [Configuring Device R3 on page 2751](#)

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```

Device R1  set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.1/30
            set interfaces lo0 unit 1 family inet address 192.168.0.1/32
            set protocols bgp group ext type external
            set protocols bgp group ext export send-direct
            set protocols bgp group ext export send-static
            set protocols bgp group ext peer-as 250
            set protocols bgp group ext neighbor 10.0.0.2
            set policy-options policy-statement send-direct term 1 from protocol direct
            set policy-options policy-statement send-direct term 1 then accept
            set policy-options policy-statement send-static term 1 from protocol static
            set policy-options policy-statement send-static term 1 then accept
            set routing-options static route 10.1.0.0/30 next-hop 10.0.0.2
            set routing-options autonomous-system 100

Device R2  set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.2/30
            set interfaces fe-1/2/1 unit 3 family inet address 10.1.0.1/30
            set interfaces lo0 unit 2 family inet address 192.168.0.2/32
            set protocols bgp group ext type external
  
```



```

set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext local-as 250
set protocols bgp group ext neighbor 10.0.0.1 peer-as 100
set protocols bgp group ext neighbor 10.1.0.2 peer-as 300
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options autonomous-system 200

```

**Device R3**

```

set interfaces fe-1/2/0 unit 4 family inet address 10.1.0.2/30
set interfaces lo0 unit 3 family inet address 192.168.0.3/32
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext peer-as 250
set protocols bgp group ext neighbor 10.1.0.1
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 10.0.0.0/30 next-hop 10.1.0.1
set routing-options autonomous-system 300

```

### *Configuring Device R1*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure Device R1:

1. Configure the interfaces.  

```

[edit interfaces]
user@R1# set fe-1/2/0 unit 1 family inet address 10.0.0.1/30

user@R1# set lo0 unit 1 family inet address 192.168.0.1/32

```
2. Configure external BGP (EBGP).  

```

[edit protocols bgp group ext]
user@R1# set type external
user@R1# set export send-direct
user@R1# set export send-static
user@R1# set peer-as 250
user@R1# set neighbor 10.0.0.2

```
3. Configure the routing policy.  

```

[edit policy-options]
user@R1# set policy-statement send-direct term 1 from protocol direct
user@R1# set policy-statement send-direct term 1 then accept
user@R1# set policy-statement send-static term 1 from protocol static
user@R1# set policy-statement send-static term 1 then accept

```



4. Configure a static route to the remote network between Device R2 and Device R3.

```
[edit routing-options]
user@R1# set static route 10.1.0.0/30 next-hop 10.0.0.2
```

5. Configure the global AS number.

```
[edit routing-options]
user@R1# set autonomous-system 100
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 1 {
    family inet {
      address 10.0.0.1/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 192.168.0.1/32;
    }
  }
}

user@R1# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}
policy-statement send-static {
  term 1 {
    from protocol static;
    then accept;
  }
}

user@R1# show protocols
bgp {
  group ext {
    type external;
    export [ send-direct send-static ];
    peer-as 250;
    neighbor 10.0.0.2;
  }
}

user@R1# show routing-options
static {
```



```

    route 10.1.0.0/30 next-hop 10.0.0.2;
}
autonomous-system 100;

```

When you are done configuring the device, enter **commit** from configuration mode.

### Configuring Device R2

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R2:

1. Configure the interfaces.
 

```

[edit interfaces]
user@R2# set fe-1/2/0 unit 2 family inet address 10.0.0.2/30

user@R2# set fe-1/2/1 unit 3 family inet address 10.1.0.1/30

user@R2# set lo0 unit 2 family inet address 192.168.0.2/32

```
2. Configure EBGP.
 

```

[edit protocols bgp group ext]
user@R2# set type external
user@R2# set export send-direct
user@R2# set export send-static
user@R2# set neighbor 10.0.0.1 peer-as 100
user@R2# set neighbor 10.1.0.2 peer-as 300

```
3. Configure the local autonomous system (AS) number.
 

```

[edit protocols bgp group ext]
user@R2# set local-as 250

```
4. Configure the global AS number.
 

```

[edit routing-options]
user@R2# set autonomous-system 200

```
5. Configure the routing policy.
 

```

[edit policy-options]
user@R2# set policy-statement send-direct term 1 from protocol direct
user@R2# set policy-statement send-direct term 1 then accept
user@R2# set policy-statement send-static term 1 from protocol static
user@R2# set policy-statement send-static term 1 then accept

```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R2# show interfaces
fe-1/2/0 {
  unit 2 {

```



```
        family inet {
            address 10.0.0.2/30;
        }
    }
}
fe-1/2/1 {
    unit 3 {
        family inet {
            address 10.1.0.1/30;
        }
    }
}
lo0 {
    unit 2 {
        family inet {
            address 192.168.0.2/32;
        }
    }
}

user@R2# show policy-options
policy-statement send-direct {
    term 1 {
        from protocol direct;
        then accept;
    }
}
policy-statement send-static {
    term 1 {
        from protocol static;
        then accept;
    }
}

user@R2# show protocols
bgp {
    group ext {
        type external;
        export [ send-direct send-static ];
        local-as 250;
        neighbor 10.0.0.1 {
            peer-as 100;
        }
        neighbor 10.1.0.2 {
            peer-as 300;
        }
    }
}

user@R2# show routing-options
autonomous-system 200;
```

When you are done configuring the device, enter **commit** from configuration mode.



**Configuring Device R3**

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R3:

1. Configure the interfaces.  

```
[edit interfaces]
user@R3# set fe-1/2/0 unit 4 family inet address 10.1.0.2/30

user@R3# set lo0 unit 3 family inet address 192.168.0.3/32
```
2. Configure EBGP.  

```
[edit protocols bgp group ext]
user@R3# set type external
user@R3# set export send-direct
user@R3# set export send-static
user@R3# set peer-as 250
user@R3# set neighbor 10.1.0.1
```
3. Configure the global autonomous system (AS) number.  

```
[edit routing-options]
user@R3# set autonomous-system 300
```
4. Configure a static route to the remote network between Device R1 and Device R2.  

```
[edit routing-options]
user@R3# set static route 10.0.0.0/30 next-hop 10.1.0.1
```
5. Configure the routing policy.  

```
[edit policy-options]
user@R3# set policy-statement send-direct term 1 from protocol direct
user@R3# set policy-statement send-direct term 1 then accept
user@R3# set policy-statement send-static term 1 from protocol static
user@R3# set policy-statement send-static term 1 then accept
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R3# show interfaces
fe-1/2/0 {
  unit 4 {
    family inet {
      address 10.1.0.2/30;
    }
  }
}
lo0 {
  unit 3 {
```



```
        family inet {
            address 192.168.0.3/32;
        }
    }
}

user@R3# show policy-options
policy-statement send-direct {
    term 1 {
        from protocol direct;
        then accept;
    }
}
policy-statement send-static {
    term 1 {
        from protocol static;
        then accept;
    }
}

user@R3# show protocols
bgp {
    group ext {
        type external;
        export [ send-direct send-static ];
        peer-as 250;
        neighbor 10.1.0.1;
    }
}

user@R3# show routing-options
static {
    route 10.0.0.0/30 next-hop 10.1.0.1;
}
autonomous-system 300;
```

When you are done configuring the device, enter **commit** from configuration mode.

### **Verification**

Confirm that the configuration is working properly.

- [Checking the Local and Global AS Settings on page 2752](#)
- [Checking the BGP Peering Sessions on page 2754](#)
- [Verifying the BGP AS Paths on page 2754](#)

### **Checking the Local and Global AS Settings**

**Purpose** Make sure that Device R2 has the local and global AS settings configured.

**Action** From operational mode, enter the **show bgp neighbors** command.

```
user@R2> show bgp neighbors
Peer: 10.0.0.1+179 AS 100      Local: 10.0.0.2+61036 AS 250
  Type: External   State: Established   Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
```



```

Export: [ send-direct send-static ]
Options: <Preference PeerAS LocalAS Refresh>
Holdtime: 90 Preference: 170 Local AS: 250 Local System AS: 200
Number of flaps: 0
Peer ID: 192.168.0.1      Local ID: 192.168.0.2      Active Holdtime: 90
Keepalive Interval: 30      Peer index: 0
BFD: disabled, down
Local Interface: fe-1/2/0.2
NLRI for restart configured on peer: inet-unicast
NLRI advertised by peer: inet-unicast
NLRI for this session: inet-unicast
Peer supports Refresh capability (2)
Stale routes from peer are kept for: 300
Peer does not support Restarter functionality
NLRI that restart is negotiated for: inet-unicast
NLRI of received end-of-rib markers: inet-unicast
NLRI of all end-of-rib markers sent: inet-unicast
Peer supports 4 byte AS extension (peer-as 100)
Peer does not support Addpath
Table inet.0 Bit: 10000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:          1
  Received prefixes:        3
  Accepted prefixes:        2
  Suppressed due to damping: 0
  Advertised prefixes:      4
Last traffic (seconds): Received 6    Sent 14    Checked 47
Input messages: Total 258    Updates 3    Refreshes 0    Octets 4969
Output messages: Total 258    Updates 2    Refreshes 0    Octets 5037
Output Queue[0]: 0

Peer: 10.1.0.2+179 AS 300      Local: 10.1.0.1+52296 AS 250
Type: External    State: Established    Flags: <Sync>
Last State: OpenConfirm    Last Event: RecvKeepAlive
Last Error: None
Export: [ send-direct send-static ]
Options: <Preference PeerAS LocalAS Refresh>
Holdtime: 90 Preference: 170 Local AS: 250 Local System AS: 200
Number of flaps: 0
Peer ID: 192.168.0.3      Local ID: 192.168.0.2      Active Holdtime: 90
Keepalive Interval: 30      Peer index: 1
BFD: disabled, down
Local Interface: fe-1/2/1.3
NLRI for restart configured on peer: inet-unicast
NLRI advertised by peer: inet-unicast
NLRI for this session: inet-unicast
Peer supports Refresh capability (2)
Stale routes from peer are kept for: 300
Peer does not support Restarter functionality
NLRI that restart is negotiated for: inet-unicast
NLRI of received end-of-rib markers: inet-unicast
NLRI of all end-of-rib markers sent: inet-unicast
Peer supports 4 byte AS extension (peer-as 300)
Peer does not support Addpath
Table inet.0 Bit: 10000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:          1
  Received prefixes:        3
  Accepted prefixes:        2

```



```

    Suppressed due to damping:    0
    Advertised prefixes:          4
    Last traffic (seconds): Received 19    Sent 26    Checked 9
    Input messages:  Total 256    Updates 3      Refreshes 0    Octets 4931
    Output messages: Total 256    Updates 2      Refreshes 0    Octets 4999
    Output Queue[0]: 0

```

**Meaning** The Local AS: 250 and Local System AS: 200 output shows that Device R2 has the expected settings. Additionally, the output shows that the options list includes LocalAS.

### *Checking the BGP Peering Sessions*

**Purpose** Ensure that the sessions are established and that the local AS number 250 is displayed.

**Action** From operational mode, enter the **show bgp summary** command.

```

user@R1> show bgp summary
Groups: 1 Peers: 1 Down peers: 0
Table      Tot Paths  Act Paths Suppressed    History  Damp State   Pending
inet.0      4          2          0          0          0      0        0
Peer        AS      InPkt    OutPkt    OutQ   Flaps  Last Up/Dwn
State|#Active/Received/Accepted/Damped...
10.0.0.2      250      232      233        0        4    1:42:37
2/4/4/0      0/0/0/0

```

```

user@R3> show bgp summary
Groups: 1 Peers: 1 Down peers: 0
Table      Tot Paths  Act Paths Suppressed    History  Damp State   Pending
inet.0      4          2          0          0          0      0        0
Peer        AS      InPkt    OutPkt    OutQ   Flaps  Last Up/Dwn
State|#Active/Received/Accepted/Damped...
10.1.0.1      250      235      236        0        4    1:44:25
2/4/4/0      0/0/0/0

```

**Meaning** Device R1 and Device R3 appear to be peering with a device in AS 250, even though Device R2 is actually in AS 200.

### *Verifying the BGP AS Paths*

**Purpose** Make sure that the routes are in the routing tables and that the AS paths show the local AS number 250.

**Action** From configuration mode, enter the **set route protocol bgp** command.

```

user@R1> show route protocol bgp
inet.0: 6 destinations, 8 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.0/30      [BGP/170] 01:46:44, localpref 100
                 AS path: 250 I
                 > to 10.0.0.2 via fe-1/2/0.1
10.1.0.0/30      [BGP/170] 01:46:44, localpref 100
                 AS path: 250 I
                 > to 10.0.0.2 via fe-1/2/0.1
192.168.0.2/32   *[BGP/170] 01:46:44, localpref 100
                 AS path: 250 I
                 > to 10.0.0.2 via fe-1/2/0.1

```



```

192.168.0.3/32      *[BGP/170] 01:46:40, localpref 100
                   AS path: 250 300 I
                   > to 10.0.0.2 via fe-1/2/0.1

user@R3> show route protocol bgp

inet.0: 6 destinations, 8 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.0/30        [BGP/170] 01:47:10, localpref 100
                   AS path: 250 I
                   > to 10.1.0.1 via fe-1/2/0.4
10.1.0.0/30        [BGP/170] 01:47:10, localpref 100
                   AS path: 250 I
                   > to 10.1.0.1 via fe-1/2/0.4
192.168.0.1/32     *[BGP/170] 01:47:10, localpref 100
                   AS path: 250 100 I
                   > to 10.1.0.1 via fe-1/2/0.4
192.168.0.2/32     *[BGP/170] 01:47:10, localpref 100
                   AS path: 250 I
                   > to 10.1.0.1 via fe-1/2/0.4

```

**Meaning** The output shows that Device R1 and Device R3 appear to have routes with AS paths that include AS 250, even though Device R2 is actually in AS 200.

### Example: Configuring a Private Local AS for EBGp Sessions

This example shows how to configure a private local autonomous system (AS) number. The local AS is considered to be private because it is advertised to peers that use the local AS number for peering, but is hidden in the announcements to peers that can use the global AS number for peering.

- [Requirements on page 2755](#)
- [Overview on page 2755](#)
- [Configuration on page 2756](#)
- [Verification on page 2759](#)

#### Requirements

No special configuration beyond device initialization is required before you configure this example.

#### Overview

Use the **local-as** statement when ISPs merge and want to preserve a customer's configuration, particularly the AS with which the customer is configured to establish a peer relationship. The **local-as** statement simulates the AS number already in place in customer routers, even if the ISP's router has moved to a different AS.

When you use the **private** option, the local AS is used during the establishment of the BGP session with an external BGP (EBGP) neighbor, but is hidden in the AS path sent to other EBGp peers. Only the global AS is included in the AS path sent to external peers.

The **private** option is useful for establishing local peering with routing devices that remain configured with their former AS or with a specific customer that has not yet modified its




peer arrangements. The local AS is used to establish the BGP session with the EBGp neighbor, but is hidden in the AS path sent to external peers in another AS.

Include the **private** option so that the local AS is not prepended before the global AS in the AS path sent to external peers. When you specify the **private** option, the local AS is prepended only in the AS path sent to the EBGp neighbor.

Figure 63 on page 2756 shows the sample topology.

**Figure 63: Topology for Configuring a Private Local AS**

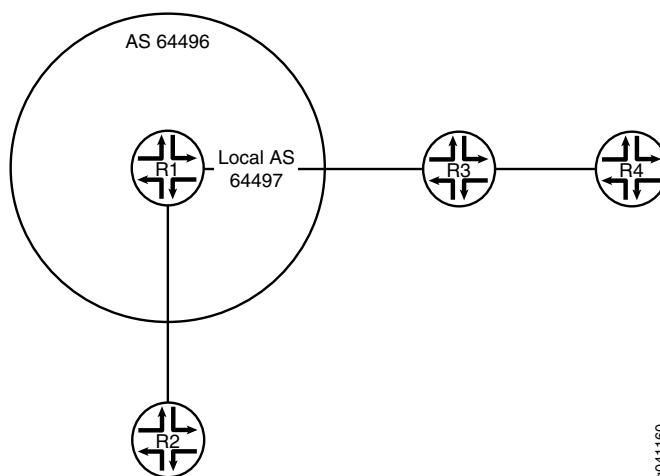

Device R1 is in AS 64496. Device R2 is in AS 64510. Device R3 is in AS 64511. Device R4 is in AS 64512. Device R1 formerly belonged to AS 64497, which has merged with another network and now belongs to AS 64496. Because Device R3 still peers with Device R1, using its former AS, 64497, Device R1 needs to be configured with a local AS of 64497 in order to maintain peering with Device R3. Configuring a local AS of 64497 permits Device R1 to add AS 64497 when advertising routes to Device R3. Device R3 sees an AS path of 64497 64496 for the prefix 10.1.1.2/32, which is Device R2's loopback interface. Device R4, which is behind Device R3, sees an AS path of 64511 64497 64496 64510 to Device R2's loopback interface. To prevent Device R1 from adding the local AS number in its announcements to other peers, this example includes the **local-as 64497 private** statement. The **private** option configures Device R1 to not include the local AS 64497 when announcing routes to Device R2. Device R2 sees an AS path of 64496 64511 to Device R3 and an AS path of 64496 64511 64512 to Device R4. The **private** option in Device R1's configuration causes the AS number 64497 to be missing from the AS paths that Device R1 readvertises to Device R2.

Device R2 is hiding the private local AS from all the routers, except Device R3. The **private** option applies to the routes that Device R1 receives (learns) from Device R3 and that Device R1, in turn, readvertises to other routers. When these routes learned from Device R3 are readvertised by Device R1 to Device R2, the private local AS is missing from the AS path advertised to Device R2.

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network



configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1	<pre> set interfaces fe-1/2/0 unit 3 family inet address 192.168.1.1/24 set interfaces fe-1/2/1 unit 5 family inet address 192.168.10.1/24 set interfaces lo0 unit 2 family inet address 10.1.1.1/32 set protocols bgp group external-AS64511 type external set protocols bgp group external-AS64511 peer-as 64511 set protocols bgp group external-AS64511 local-as 64497 set protocols bgp group external-AS64511 local-as private set protocols bgp group external-AS64511 neighbor 192.168.1.2 set protocols bgp group external-AS64510 type external set protocols bgp group external-AS64510 peer-as 64510 set protocols bgp group external-AS64510 neighbor 192.168.10.2 set policy-options policy-statement send-direct term 1 from protocol direct set policy-options policy-statement send-direct term 1 then accept set routing-options autonomous-system 64496 </pre>
Device R2	<pre> set interfaces fe-1/2/0 unit 6 family inet address 192.168.10.2/24 set interfaces lo0 unit 3 family inet address 10.1.1.2/32 set protocols bgp group external type external set protocols bgp group external export send-direct set protocols bgp group external peer-as 64496 set protocols bgp group external neighbor 192.168.10.1 set policy-options policy-statement send-direct term 1 from protocol direct set policy-options policy-statement send-direct term 1 then accept set routing-options autonomous-system 64510 </pre>
Device R3	<pre> set interfaces fe-1/2/0 unit 4 family inet address 192.168.1.2/24 set interfaces fe-1/2/1 unit 7 family inet address 192.168.5.1/24 set interfaces lo0 unit 4 family inet address 10.1.1.3/32 set protocols bgp group external type external set protocols bgp group external export send-direct set protocols bgp group external neighbor 192.168.1.1 peer-as 64497 set protocols bgp group external neighbor 192.168.5.2 peer-as 64512 set policy-options policy-statement send-direct term 1 from protocol direct set policy-options policy-statement send-direct term 1 then accept set routing-options autonomous-system 64511 </pre>
Device R4	<pre> set interfaces fe-1/2/0 unit 8 family inet address 192.168.5.2/24 set interfaces lo0 unit 5 family inet address 10.1.1.4/32 set protocols bgp group external type external set protocols bgp group external export send-direct set protocols bgp group external peer-as 64511 set protocols bgp group external neighbor 192.168.5.1 set policy-options policy-statement send-direct term 1 from protocol direct set policy-options policy-statement send-direct term 1 then accept set routing-options autonomous-system 64512 </pre>



### *Configuring Device R1*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R1:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 3]
user@R1# set family inet address 192.168.1.1/24
```

```
[edit interfaces fe-1/2/1 unit 5]
user@R1# set family inet address 192.168.10.1/24
```

```
[edit interfaces lo0 unit 2]
user@R1# set family inet address 10.1.1.1/32
```

2. Configure the EBGP peering session with Device R2.

```
[edit protocols bgp group external-AS64510]
user@R1# set type external
user@R1# set peer-as 64510
user@R1# set neighbor 192.168.10.2
```

3. Configure the EBGP peering session with Device R3.

```
[edit protocols bgp group external-AS64511]
user@R1# set type external
user@R1# set peer-as 64511
user@R1# set local-as 64497
user@R1# set local-as private
user@R1# set neighbor 192.168.1.2
```

4. Configure the routing policy.

```
[edit policy-options policy-statement send-direct term 1]
user@R1# set from protocol direct
user@R1# set then accept
```

5. Configure the global autonomous system (AS) number.

```
[edit routing-options]
user@R1# set autonomous-system 64496
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 3 {
    family inet {
      address 192.168.1.1/24;
    }
  }
}
```



```

    }
  }
  fe-1/2/1 {
    unit 5 {
      family inet {
        address 192.168.10.1/24;
      }
    }
  }
  lo0 {
    unit 2 {
      family inet {
        address 10.1.1.1/32;
      }
    }
  }
}

user@R1# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}

user@R1# show protocols
bgp {
  group external-AS64511 {
    type external;
    peer-as 64511;
    local-as 64497 private;
    neighbor 192.168.1.2;
  }
  group external-AS64510 {
    type external;
    peer-as 64510;
    neighbor 192.168.10.2;
  }
}

user@R1# show routing-options
autonomous-system 64496;

```

If you are done configuring the device, enter **commit** from configuration mode.

Repeat the configuration as needed for the other devices in the topology.

### Verification

Confirm that the configuration is working properly.

- [Checking Device R2's AS Paths on page 2760](#)
- [Checking Device R3's AS Paths on page 2760](#)



**Checking Device R2's AS Paths**

**Purpose** Make sure that Device R2 does not have AS 64497 in its AS paths to Device R3 and Device R4.

**Action** From operational mode, enter the **show route protocol bgp** command.

```
user@R2> show route protocol bgp
inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.1.1.3/32      *[BGP/170] 01:33:11, localpref 100
                  AS path: 64496 64511 I
                  > to 192.168.10.1 via fe-1/2/0.6
10.1.1.4/32      *[BGP/170] 01:33:11, localpref 100
                  AS path: 64496 64511 64512 I
                  > to 192.168.10.1 via fe-1/2/0.6
192.168.5.0/24   *[BGP/170] 01:49:15, localpref 100
                  AS path: 64496 64511 I
                  > to 192.168.10.1 via fe-1/2/0.6
```

**Meaning** Device R2's AS paths do not include AS 64497.

**Checking Device R3's AS Paths**

**Purpose** Make sure that Device R3 does not have AS 64497 in its AS path to Device R4.

**Action** From operational mode, enter the **show route protocol bgp** command.

```
user@R3> show route protocol bgp
inet.0: 7 destinations, 8 routes (7 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.1.1.2/32      *[BGP/170] 01:35:11, localpref 100
                  AS path: 64497 64496 64510 I
                  > to 192.168.1.1 via fe-1/2/0.4
10.1.1.4/32      *[BGP/170] 01:35:11, localpref 100
                  AS path: 64512 I
                  > to 192.168.5.2 via fe-1/2/1.7
192.168.5.0/24   [BGP/170] 01:51:15, localpref 100
                  AS path: 64512 I
                  > to 192.168.5.2 via fe-1/2/1.7
```

**Meaning** Device R3's route to Device R2 (prefix 10.1.1.2) includes both the local and the global AS configured on Device R1 (64497 and 64496, respectively).

**Related Documentation**

- [Examples: Configuring External BGP Peering on page 2643](#)
- [BGP Configuration Overview](#)

**Example: Configuring the Accumulated IGP Attribute for BGP**

- [Understanding the Accumulated IGP Attribute for BGP on page 2761](#)
- [Example: Configuring the Accumulated IGP Attribute for BGP on page 2761](#)



---

### Understanding the Accumulated IGP Attribute for BGP

---

The interior gateway protocols (IGPs) are designed to handle routing within a single domain or an autonomous system (AS). Each link is assigned a particular value called a metric. The distance between the two nodes is calculated as a sum of all the metric values of links along the path. The IGP selects the shortest path between two nodes based on distance.

BGP is designed to provide routing over a large number of independent ASs with limited or no coordination among respective administrations. BGP does not use metrics in the path selection decisions.

The accumulated IGP (AIGP) metric attribute for BGP enables deployment in which a single administration can run several contiguous BGP ASs. Such deployments allow BGP to make routing decisions based on the IGP metric. In such networks, it is possible for BGP to select paths based on metrics as is done by IGPs. In this case, BGP chooses the shortest path between two nodes, even though the nodes might be in two different ASs.

The AIGP attribute is particularly useful in networks that use tunneling to deliver a packet to its BGP next hop. The Juniper Networks® Junos® operating system (Junos OS) currently supports the AIGP attribute for two BGP address families, **family inet labeled-unicast** and **family inet6 labeled-unicast**.

AIGP impacts the BGP best-route decision process. The AIGP attribute preference rule is applied after the local-preference rule. The AIGP distance is compared to break a tie. The BGP best-route decision process also impacts the way the interior cost rule is applied if the resolving next hop has an AIGP attribute. Without AIGP enabled, the interior cost of a route is based on the calculation of the metric to the next hop for the route. With AIGP enabled, the resolving AIGP distance is added to the interior cost.

The AIGP attribute is an optional non-transitive BGP path attribute and is specified in Internet draft draft-ietf-idr-aigp-06, *The Accumulated IGP Metric Attribute for BGP*.

---

### Example: Configuring the Accumulated IGP Attribute for BGP

---

This example shows how to configure the accumulated IGP (AIGP) metric attribute for BGP.

- [Requirements on page 2761](#)
- [Overview on page 2762](#)
- [Configuration on page 2763](#)
- [Verification on page 2793](#)

#### **Requirements**

This example uses the following hardware and software components:

- Seven BGP-speaking devices.
- Junos OS Release 12.1 or later.



### Overview

The AIGP attribute enables deployments in which a single administration can run several contiguous BGP autonomous systems (ASs). Such deployments allow BGP to make routing decisions based on the IGP metric. With AIGP enabled, BGP can select paths based on IGP metrics. This enables BGP to choose the shortest path between two nodes, even though the nodes might be in different ASs. The AIGP attribute is particularly useful in networks that use tunneling to deliver a packet to its BGP next hop. This example shows AIGP configured with MPLS label-switched paths.

To enable AIGP, you include the **aigp** statement in the BGP configuration on a protocol family basis. Configuring AIGP on a particular family enables sending and receiving of the AIGP attribute on that family. By default, AIGP is disabled. An AIGP-disabled neighbor does not send an AIGP attribute and silently discards a received AIGP attribute.

Junos OS supports AIGP for **family inet labeled-unicast** and **family inet6 labeled-unicast**. The **aigp** statement can be configured for a given family at the global BGP, group, or neighbor level.

By default, the value of the AIGP attribute for a local prefix is zero. An AIGP-enabled neighbor can originate an AIGP attribute for a given prefix by export policy, using the **aigp-originate** policy action. The value of the AIGP attribute reflects the IGP distance to the prefix. Alternatively, you can specify a value, by using the **aigp-originate distance distance** policy action. The configurable range is 0 through 4,294,967,295. Only one node needs to originate an AIGP attribute. The AIGP attribute is retained and readvertised if the neighbors are AIGP enabled with the **aigp** statement in the BGP configuration.

The policy action to originate the AIGP attribute has the following requirements:

- Neighbor must be AIGP enabled.
- Policy must be applied as an export policy.
- Prefix must have no current AIGP attribute.
- Prefix must export with next-hop self.
- Prefix must reside within the AIGP domain. Typically, a loopback IP address is the prefix to originate.

The policy is ignored if these requirements are not met.


### Topology Diagram

Figure 64 on page 2763 shows the topology used in this example. OSPF is used as the interior gateway protocol (IGP). Internal BGP (IBGP) is configured between Device PE1 and Device PE4. External BGP (EBGP) is configured between Device PE7 and Device PE1, between Device PE4 and Device PE3, and between Device PE4 and Device PE2. Devices PE4, PE2, and PE3 are configured for multihop. Device PE4 selects a path based on the AIGP value and then readvertises the AIGP value based on the AIGP and policy configuration. Device PE1 readvertises the AIGP value to Device PE7, which is in another administrative domain. Every device has two loopback interface addresses: 10.9.9.x is used for BGP peering and the router ID, and 10.100.1.x is used for the BGP next hop.



The network between Device PE1 and PE3 has IBGP peering and multiple OSPF areas. The external link to Device PE7 is configured to show that the AIGP attribute is readvertised to a neighbor outside of the administrative domain, if that neighbor is AIGP enabled.

**Figure 64: Advertisement of Multiple Paths in BGP**

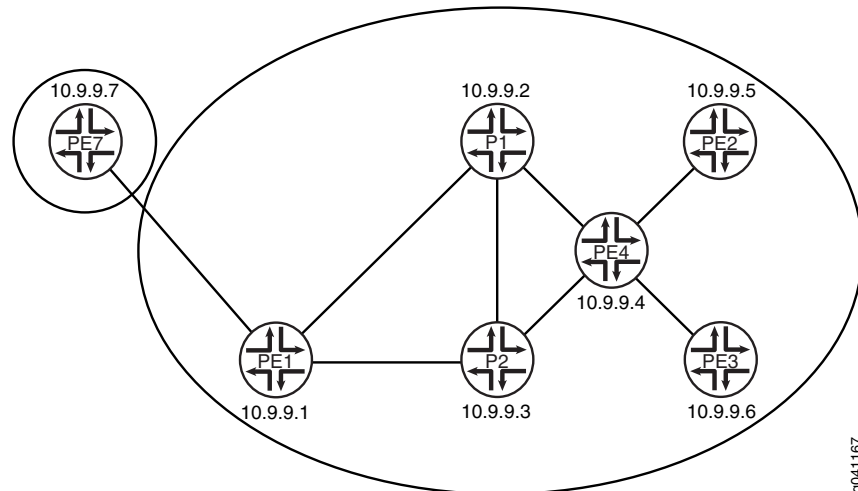

For origination of an AIGP attribute, the BGP next hop is required to be itself. If the BGP next hop remains unchanged, the received AIGP attribute is readvertised, as is, to another AIGP neighbor. If the next hop changes, the received AIGP attribute is readvertised with an increased value to another AIGP neighbor. The increase in value reflects the IGP distance to the previous BGP next hop. To demonstrate, this example uses loopback interface addresses for Device PE4's EBGP peering sessions with Device PE2 and Device PE3. Multihop is enabled on these sessions so that a recursive lookup is performed to determine the point-to-point interface. Because the next hop changes, the IGP distance is added to the AIGP distance.

#### Configuration

- [Configuring Device P1 on page 2769](#)
- [Configuring Device P2 on page 2772](#)
- [Configuring Device PE4 on page 2775](#)
- [Configuring Device PE1 on page 2780](#)
- [Configuring Device PE2 on page 2784](#)
- [Configuring Device PE3 on page 2788](#)
- [Configuring Device PE7 on page 2791](#)

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
Device P1 set interfaces fe-1/2/0 unit 1 description P1-to-PE1
set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.2/30
set interfaces fe-1/2/0 unit 1 family mpls
set interfaces fe-1/2/1 unit 4 description P1-to-P2
```



```
set interfaces fe-1/2/1 unit 4 family inet address 10.0.0.29/30
set interfaces fe-1/2/1 unit 4 family mpls
set interfaces fe-1/2/2 unit 8 description P1-to-PE4
set interfaces fe-1/2/2 unit 8 family inet address 10.0.0.17/30
set interfaces fe-1/2/2 unit 8 family mpls
set interfaces lo0 unit 3 family inet address 10.9.9.2/32
set interfaces lo0 unit 3 family inet address 10.100.1.2/32
set protocols rsvp interface fe-1/2/0.1
set protocols rsvp interface fe-1/2/2.8
set protocols rsvp interface fe-1/2/1.4
set protocols mpls label-switched-path P1-to-P2 to 10.9.9.3
set protocols mpls label-switched-path P1-to-PE1 to 10.9.9.1
set protocols mpls label-switched-path P1-to-PE4 to 10.9.9.4
set protocols mpls interface fe-1/2/0.1
set protocols mpls interface fe-1/2/2.8
set protocols mpls interface fe-1/2/1.4
set protocols bgp group internal type internal
set protocols bgp group internal local-address 10.9.9.2
set protocols bgp group internal family inet labeled-unicast aigp
set protocols bgp group internal neighbor 10.9.9.1
set protocols bgp group internal neighbor 10.9.9.3
set protocols bgp group internal neighbor 10.9.9.4
set protocols ospf area 0.0.0.1 interface fe-1/2/0.1 metric 1
set protocols ospf area 0.0.0.1 interface fe-1/2/1.4 metric 1
set protocols ospf area 0.0.0.0 interface fe-1/2/2.8 metric 1
set protocols ospf area 0.0.0.0 interface 10.9.9.2 passive
set protocols ospf area 0.0.0.0 interface 10.9.9.2 metric 1
set protocols ospf area 0.0.0.0 interface 10.100.1.2 passive
set protocols ospf area 0.0.0.0 interface 10.100.1.2 metric 1
set routing-options router-id 10.9.9.2
set routing-options autonomous-system 13979
```

**Device P2**

```
set interfaces fe-1/2/0 unit 3 description P2-to-PE1
set interfaces fe-1/2/0 unit 3 family inet address 10.0.0.6/30
set interfaces fe-1/2/0 unit 3 family mpls
set interfaces fe-1/2/1 unit 5 description P2-to-P1
set interfaces fe-1/2/1 unit 5 family inet address 10.0.0.30/30
set interfaces fe-1/2/1 unit 5 family mpls
set interfaces fe-1/2/2 unit 6 description P2-to-PE4
set interfaces fe-1/2/2 unit 6 family inet address 10.0.0.13/30
set interfaces fe-1/2/2 unit 6 family mpls
set interfaces lo0 unit 5 family inet address 10.9.9.3/32
set interfaces lo0 unit 5 family inet address 10.100.1.3/32
set protocols rsvp interface fe-1/2/1.5
set protocols rsvp interface fe-1/2/2.6
set protocols rsvp interface fe-1/2/0.3
set protocols mpls label-switched-path P2-to-PE1 to 10.9.9.1
set protocols mpls label-switched-path P2-to-P1 to 10.9.9.2
set protocols mpls label-switched-path P2-to-PE4 to 10.9.9.4
set protocols mpls interface fe-1/2/1.5
set protocols mpls interface fe-1/2/2.6
set protocols mpls interface fe-1/2/0.3
set protocols bgp group internal type internal
set protocols bgp group internal local-address 10.9.9.3
set protocols bgp group internal family inet labeled-unicast aigp
set protocols bgp group internal neighbor 10.9.9.1
```



```

set protocols bgp group internal neighbor 10.9.9.2
set protocols bgp group internal neighbor 10.9.9.4
set protocols ospf area 0.0.0.0 interface fe-1/2/2.6 metric 1
set protocols ospf area 0.0.0.0 interface 10.9.9.3 passive
set protocols ospf area 0.0.0.0 interface 10.9.9.3 metric 1
set protocols ospf area 0.0.0.0 interface 10.100.1.3 passive
set protocols ospf area 0.0.0.0 interface 10.100.1.3 metric 1
set routing-options router-id 10.9.9.3
set routing-options autonomous-system 13979

```

**Device PE4**

```

set interfaces fe-1/2/0 unit 7 description PE4-to-P2
set interfaces fe-1/2/0 unit 7 family inet address 10.0.0.14/30
set interfaces fe-1/2/0 unit 7 family mpls
set interfaces fe-1/2/1 unit 9 description PE4-to-P1
set interfaces fe-1/2/1 unit 9 family inet address 10.0.0.18/30
set interfaces fe-1/2/1 unit 9 family mpls
set interfaces fe-1/2/2 unit 10 description PE4-to-PE2
set interfaces fe-1/2/2 unit 10 family inet address 10.0.0.21/30
set interfaces fe-1/2/2 unit 10 family mpls
set interfaces fe-1/0/2 unit 12 description PE4-to-PE3
set interfaces fe-1/0/2 unit 12 family inet address 10.0.0.25/30
set interfaces fe-1/0/2 unit 12 family mpls
set interfaces lo0 unit 7 family inet address 10.9.9.4/32
set interfaces lo0 unit 7 family inet address 10.100.1.4/32
set protocols rsvp interface fe-1/2/0.7
set protocols rsvp interface fe-1/2/1.9
set protocols rsvp interface fe-1/2/2.10
set protocols rsvp interface fe-1/0/2.12
set protocols mpls label-switched-path PE4-to-PE2 to 10.9.9.5
set protocols mpls label-switched-path PE4-to-PE3 to 10.9.9.6
set protocols mpls label-switched-path PE4-to-P1 to 10.9.9.2
set protocols mpls label-switched-path PE4-to-P2 to 10.9.9.3
set protocols mpls interface fe-1/2/0.7
set protocols mpls interface fe-1/2/1.9
set protocols mpls interface fe-1/2/2.10
set protocols mpls interface fe-1/0/2.12
set protocols bgp export next-hop
set protocols bgp export aigp
set protocols bgp group internal type internal
set protocols bgp group internal local-address 10.9.9.4
set protocols bgp group internal family inet labeled-unicast aigp
set protocols bgp group internal neighbor 10.9.9.1
set protocols bgp group internal neighbor 10.9.9.3
set protocols bgp group internal neighbor 10.9.9.2
set protocols bgp group external type external
set protocols bgp group external multihop ttl 2
set protocols bgp group external local-address 10.9.9.4
set protocols bgp group external family inet labeled-unicast aigp
set protocols bgp group external peer-as 7018
set protocols bgp group external neighbor 10.9.9.5
set protocols bgp group external neighbor 10.9.9.6
set protocols ospf area 0.0.0.0 interface fe-1/2/1.9 metric 1
set protocols ospf area 0.0.0.0 interface fe-1/2/0.7 metric 1
set protocols ospf area 0.0.0.0 interface 10.9.9.4 passive
set protocols ospf area 0.0.0.0 interface 10.9.9.4 metric 1
set protocols ospf area 0.0.0.0 interface 10.100.1.4 passive

```



```

set protocols ospf area 0.0.0.0 interface 10.100.1.4 metric 1
set protocols ospf area 0.0.0.2 interface fe-1/2/2.10 metric 1
set protocols ospf area 0.0.0.3 interface fe-1/0/2.12 metric 1
set policy-options policy-statement aigp term 10 from protocol static
set policy-options policy-statement aigp term 10 from route-filter 44.0.0.0/24 exact
set policy-options policy-statement aigp term 10 then aigp-originate distance 200
set policy-options policy-statement aigp term 10 then next-hop 10.100.1.4
set policy-options policy-statement aigp term 10 then accept
set policy-options policy-statement next-hop term 10 from protocol bgp
set policy-options policy-statement next-hop term 10 then next-hop 10.100.1.4
set policy-options policy-statement next-hop term 10 then accept
set policy-options policy-statement next-hop term 20 from protocol direct
set policy-options policy-statement next-hop term 20 from route-filter 10.9.9.4/32 exact
set policy-options policy-statement next-hop term 20 from route-filter 10.100.1.4/32
    exact
set policy-options policy-statement next-hop term 20 then next-hop 10.100.1.4
set policy-options policy-statement next-hop term 20 then accept
set routing-options static route 44.0.0.0/24 discard
set routing-options router-id 10.9.9.4
set routing-options autonomous-system 13979

```

**Device PE1**

```

set interfaces fe-1/2/0 unit 0 description PE1-to-P1
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.1/30
set interfaces fe-1/2/0 unit 0 family mpls
set interfaces fe-1/2/1 unit 2 description PE1-to-P2
set interfaces fe-1/2/1 unit 2 family inet address 10.0.0.5/30
set interfaces fe-1/2/1 unit 2 family mpls
set interfaces fe-1/2/2 unit 14 description PE1-to-PE7
set interfaces fe-1/2/2 unit 14 family inet address 10.0.0.9/30
set interfaces lo0 unit 1 family inet address 10.9.9.1/32
set interfaces lo0 unit 1 family inet address 10.100.1.1/32
set protocols rsvp interface fe-1/2/0.0
set protocols rsvp interface fe-1/2/1.2
set protocols rsvp interface fe-1/2/2.14
set protocols mpls label-switched-path PE1-to-P1 to 10.9.9.2
set protocols mpls label-switched-path PE1-to-P2 to 10.9.9.3
set protocols mpls interface fe-1/2/0.0
set protocols mpls interface fe-1/2/1.2
set protocols mpls interface fe-1/2/2.14
set protocols bgp group internal type internal
set protocols bgp group internal local-address 10.9.9.1
set protocols bgp group internal family inet labeled-unicast aigp
set protocols bgp group internal export SET_EXPORT_ROUTES
set protocols bgp group internal vpn-apply-export
set protocols bgp group internal neighbor 10.9.9.4
set protocols bgp group internal neighbor 10.9.9.2
set protocols bgp group internal neighbor 10.9.9.3
set protocols bgp group external type external
set protocols bgp group external family inet labeled-unicast aigp
set protocols bgp group external export SET_EXPORT_ROUTES
set protocols bgp group external peer-as 7019
set protocols bgp group external neighbor 10.0.0.10
set protocols ospf area 0.0.0.1 interface fe-1/2/0.0 metric 1
set protocols ospf area 0.0.0.1 interface fe-1/2/1.2 metric 1
set protocols ospf area 0.0.0.1 interface 10.9.9.1 passive
set protocols ospf area 0.0.0.1 interface 10.9.9.1 metric 1

```



```

set protocols ospf area 0.0.0.1 interface 10.100.1.1 passive
set protocols ospf area 0.0.0.1 interface 10.100.1.1 metric 1
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol direct
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol bgp
set policy-options policy-statement SET_EXPORT_ROUTES term 10 then next-hop
  10.100.1.1
set policy-options policy-statement SET_EXPORT_ROUTES term 10 then accept
set routing-options router-id 10.9.9.1
set routing-options autonomous-system 13979

```

**Device PE2**

```

set interfaces fe-1/2/0 unit 11 description PE2-to-PE4
set interfaces fe-1/2/0 unit 11 family inet address 10.0.0.22/30
set interfaces fe-1/2/0 unit 11 family mpls
set interfaces lo0 unit 9 family inet address 10.9.9.5/32 primary
set interfaces lo0 unit 9 family inet address 10.100.1.5/32
set protocols rsvp interface fe-1/2/0.11
set protocols mpls label-switched-path PE2-to-PE4 to 10.9.9.4
set protocols mpls interface fe-1/2/0.11
set protocols bgp group external type external
set protocols bgp group external multihop ttl 2
set protocols bgp group external local-address 10.9.9.5
set protocols bgp group external family inet labeled-unicast aigp
set protocols bgp group external export next-hop
set protocols bgp group external export aigp
set protocols bgp group external export SET_EXPORT_ROUTES
set protocols bgp group external vpn-apply-export
set protocols bgp group external peer-as 13979
set protocols bgp group external neighbor 10.9.9.4
set protocols ospf area 0.0.0.2 interface 10.9.9.5 passive
set protocols ospf area 0.0.0.2 interface 10.9.9.5 metric 1
set protocols ospf area 0.0.0.2 interface 10.100.1.5 passive
set protocols ospf area 0.0.0.2 interface 10.100.1.5 metric 1
set protocols ospf area 0.0.0.2 interface fe-1/2/0.11 metric 1
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol direct
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol static
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol bgp
set policy-options policy-statement SET_EXPORT_ROUTES term 10 then next-hop
  10.100.1.5
set policy-options policy-statement SET_EXPORT_ROUTES term 10 then accept
set policy-options policy-statement aigp term 10 from route-filter 55.0.0.0/24 exact
set policy-options policy-statement aigp term 10 then aigp-originate distance 20
set policy-options policy-statement aigp term 10 then next-hop 10.100.1.5
set policy-options policy-statement aigp term 10 then accept
set policy-options policy-statement aigp term 20 from route-filter 99.0.0.0/24 exact
set policy-options policy-statement aigp term 20 then aigp-originate distance 30
set policy-options policy-statement aigp term 20 then next-hop 10.100.1.5
set policy-options policy-statement aigp term 20 then accept
set policy-options policy-statement next-hop term 10 from protocol bgp
set policy-options policy-statement next-hop term 10 then next-hop 10.100.1.5
set policy-options policy-statement next-hop term 10 then accept
set policy-options policy-statement next-hop term 20 from protocol direct
set policy-options policy-statement next-hop term 20 from route-filter 10.9.9.5/32 exact
set policy-options policy-statement next-hop term 20 from route-filter 10.100.1.5/32
  exact
set policy-options policy-statement next-hop term 20 then next-hop 10.100.1.5
set policy-options policy-statement next-hop term 20 then accept

```



```
set routing-options static route 99.0.0.0/24 discard
set routing-options static route 55.0.0.0/24 discard
set routing-options router-id 10.9.9.5
set routing-options autonomous-system 7018
```

**Device PE3**

```
set interfaces fe-1/2/0 unit 13 description PE3-to-PE4
set interfaces fe-1/2/0 unit 13 family inet address 10.0.0.26/30
set interfaces fe-1/2/0 unit 13 family mpls
set interfaces lo0 unit 11 family inet address 10.9.9.6/32
set interfaces lo0 unit 11 family inet address 10.100.1.6/32
set protocols rsvp interface fe-1/2/0.13
set protocols mpls label-switched-path PE3-to-PE4 to 10.9.9.4
set protocols mpls interface fe-1/2/0.13
set protocols bgp group external type external
set protocols bgp group external multihop ttl 2
set protocols bgp group external local-address 10.9.9.6
set protocols bgp group external family inet labeled-unicast aigp
set protocols bgp group external export next-hop
set protocols bgp group external export SET_EXPORT_ROUTES
set protocols bgp group external vpn-apply-export
set protocols bgp group external peer-as 13979
set protocols bgp group external neighbor 10.9.9.4
set protocols ospf area 0.0.0.3 interface 10.9.9.6 passive
set protocols ospf area 0.0.0.3 interface 10.9.9.6 metric 1
set protocols ospf area 0.0.0.3 interface 10.100.1.6 passive
set protocols ospf area 0.0.0.3 interface 10.100.1.6 metric 1
set protocols ospf area 0.0.0.3 interface fe-1/2/0.13 metric 1
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol direct
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol static
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol bgp
set policy-options policy-statement SET_EXPORT_ROUTES term 10 then next-hop
  10.100.1.6
set policy-options policy-statement SET_EXPORT_ROUTES term 10 then accept
set policy-options policy-statement next-hop term 10 from protocol bgp
set policy-options policy-statement next-hop term 10 then next-hop 10.100.1.6
set policy-options policy-statement next-hop term 10 then accept
set policy-options policy-statement next-hop term 20 from protocol direct
set policy-options policy-statement next-hop term 20 from route-filter 10.9.9.6/32 exact
set policy-options policy-statement next-hop term 20 from route-filter 10.100.1.6/32
  exact
set policy-options policy-statement next-hop term 20 then next-hop 10.100.1.6
set policy-options policy-statement next-hop term 20 then accept
set routing-options router-id 10.9.9.6
set routing-options autonomous-system 7018
```

**Device PE7**

```
set interfaces fe-1/2/0 unit 15 description PE7-to-PE1
set interfaces fe-1/2/0 unit 15 family inet address 10.0.0.10/30
set interfaces lo0 unit 13 family inet address 10.9.9.7/32
set interfaces lo0 unit 13 family inet address 10.100.1.7/32
set protocols bgp group external type external
set protocols bgp group external family inet labeled-unicast aigp
set protocols bgp group external export SET_EXPORT_ROUTES
set protocols bgp group external peer-as 13979
set protocols bgp group external neighbor 10.0.0.9
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol direct
```



```

set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol bgp
set policy-options policy-statement SET_EXPORT_ROUTES term 10 then next-hop
  10.100.1.7
set policy-options policy-statement SET_EXPORT_ROUTES term 10 then accept
set routing-options router-id 10.9.9.7
set routing-options autonomous-system 7019

```

### Configuring Device P1

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device P1:

1. Configure the interfaces.

```

[edit interfaces]
user@P1# set fe-1/2/0 unit 1 description P1-to-PE1
user@P1# set fe-1/2/0 unit 1 family inet address 10.0.0.2/30
user@P1# set fe-1/2/0 unit 1 family mpls
user@P1# set fe-1/2/1 unit 4 description P1-to-P2
user@P1# set fe-1/2/1 unit 4 family inet address 10.0.0.29/30
user@P1# set fe-1/2/1 unit 4 family mpls
user@P1# set fe-1/2/2 unit 8 description P1-to-PE4
user@P1# set fe-1/2/2 unit 8 family inet address 10.0.0.17/30
user@P1# set fe-1/2/2 unit 8 family mpls
user@P1# set lo0 unit 3 family inet address 10.9.9.2/32
user@P1# set lo0 unit 3 family inet address 10.100.1.2/32

```

2. Configure MPLS and a signaling protocol, such as RSVP or LDP.

```

[edit protocols]
user@P1# set rsdp interface fe-1/2/0.1
user@P1# set rsdp interface fe-1/2/2.8
user@P1# set rsdp interface fe-1/2/1.4
user@P1# set mpls label-switched-path P1-to-P2 to 10.9.9.3
user@P1# set mpls label-switched-path P1-to-PE1 to 10.9.9.1
user@P1# set mpls label-switched-path P1-to-PE4 to 10.9.9.4
user@P1# set mpls interface fe-1/2/0.1
user@P1# set mpls interface fe-1/2/2.8
user@P1# set mpls interface fe-1/2/1.4

```

3. Configure BGP.

```

[edit protocols bgp group internal]
user@P1# set type internal
user@P1# set local-address 10.9.9.2
user@P1# set neighbor 10.9.9.1
user@P1# set neighbor 10.9.9.3
user@P1# set neighbor 10.9.9.4

```

4. Enable AIGP.

```

[edit protocols bgp group internal]
user@P1# set family inet labeled-unicast aigp

```



5. Configure an IGP, such as OSPF, RIP, or IS-IS.

```
[edit protocols ospf]
user@P1# set area 0.0.0.1 interface fe-1/2/0.1 metric 1
user@P1# set area 0.0.0.1 interface fe-1/2/1.4 metric 1
user@P1# set area 0.0.0.0 interface fe-1/2/2.8 metric 1
user@P1# set area 0.0.0.0 interface 10.9.9.2 passive
user@P1# set area 0.0.0.0 interface 10.9.9.2 metric 1
user@P1# set area 0.0.0.0 interface 10.100.1.2 passive
user@P1# set area 0.0.0.0 interface 10.100.1.2 metric 1
```

6. Configure the router ID and the autonomous system number.

```
[edit routing-options]
user@P1# set router-id 10.9.9.2
user@P1# set autonomous-system 13979
```

7. If you are done configuring the device, commit the configuration.

```
user@P1# commit
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@P1# show interfaces
fe-1/2/0 {
  unit 1 {
    description P1-to-PE1;
    family inet {
      address 10.0.0.2/30;
    }
    family mpls;
  }
}
fe-1/2/1 {
  unit 4 {
    description P1-to-P2;
    family inet {
      address 10.0.0.29/30;
    }
    family mpls;
  }
}
fe-1/2/2 {
  unit 8 {
    description P1-to-PE4;
    family inet {
      address 10.0.0.17/30;
    }
    family mpls;
  }
}
lo0 {
  unit 3 {
    family inet {
```



```

        address 10.9.9.2/32;
        address 10.100.1.2/32;
    }
}
}

user@P1# show protocols
rsvp {
    interface fe-1/2/0.1;
    interface fe-1/2/2.8;
    interface fe-1/2/1.4;
}
mpls {
    label-switched-path P1-to-P2 {
        to 10.9.9.3;
    }
    label-switched-path P1-to-PE1 {
        to 10.9.9.1;
    }
    label-switched-path P1-to-PE4 {
        to 10.9.9.4;
    }
    interface fe-1/2/0.1;
    interface fe-1/2/2.8;
    interface fe-1/2/1.4;
}
bgp {
    group internal {
        type internal;
        local-address 10.9.9.2;
        family inet {
            labeled-unicast {
                aigp;
            }
        }
        neighbor 10.9.9.1;
        neighbor 10.9.9.3;
        neighbor 10.9.9.4;
    }
}
ospf {
    area 0.0.0.1 {
        interface fe-1/2/0.1 {
            metric 1;
        }
        interface fe-1/2/1.4 {
            metric 1;
        }
    }
    area 0.0.0.0 {
        interface fe-1/2/2.8 {
            metric 1;
        }
        interface 10.9.9.2 {
            passive;
            metric 1;
        }
    }
}

```



```
}
interface 10.100.1.2 {
    passive;
    metric 1;
}
}
}

user@P1# show routing-options
router-id 10.9.9.2;
autonomous-system 13979;
```

### *Configuring Device P2*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure Device P2:

1. Configure the interfaces.

```
[edit interfaces]
user@P2# set fe-1/2/0 unit 3 description P2-to-PE1
user@P2# set fe-1/2/0 unit 3 family inet address 10.0.0.6/30
user@P2# set fe-1/2/0 unit 3 family mpls
user@P2# set fe-1/2/1 unit 5 description P2-to-P1
user@P2# set fe-1/2/1 unit 5 family inet address 10.0.0.30/30
user@P2# set fe-1/2/1 unit 5 family mpls
user@P2# set fe-1/2/2 unit 6 description P2-to-PE4
user@P2# set fe-1/2/2 unit 6 family inet address 10.0.0.13/30
user@P2# set fe-1/2/2 unit 6 family mpls
user@P2# set lo0 unit 5 family inet address 10.9.9.3/32
user@P2# set lo0 unit 5 family inet address 10.100.1.3/32
```

2. Configure MPLS and a signaling protocol, such as RSVP or LDP.

```
[edit protocols]
user@P2# set rsvp interface fe-1/2/1.5
user@P2# set rsvp interface fe-1/2/2.6
user@P2# set rsvp interface fe-1/2/0.3
user@P2# set mpls label-switched-path P2-to-PE1 to 10.9.9.1
user@P2# set mpls label-switched-path P2-to-P1 to 10.9.9.2
user@P2# set mpls label-switched-path P2-to-PE4 to 10.9.9.4
user@P2# set mpls interface fe-1/2/1.5
user@P2# set mpls interface fe-1/2/2.6
user@P2# set mpls interface fe-1/2/0.3
```

3. Configure BGP.

```
[edit protocols bgp group internal]
user@P2# set type internal
user@P2# set local-address 10.9.9.3
user@P2# set neighbor 10.9.9.1
user@P2# set neighbor 10.9.9.2
user@P2# set neighbor 10.9.9.4
```



4. Enable AIGP.

```
[edit protocols bgp group internal]
user@P2# set family inet labeled-unicast aigp
```

5. Configure an IGP, such as OSPF, RIP, or IS-IS.

```
[edit protocols ospf]
user@P2# set area 0.0.0.0 interface fe-1/2/2.6 metric 1
user@P2# set area 0.0.0.0 interface 10.9.9.3 passive
user@P2# set area 0.0.0.0 interface 10.9.9.3 metric 1
user@P2# set area 0.0.0.0 interface 10.100.1.3 passive
user@P2# set area 0.0.0.0 interface 10.100.1.3 metric 1
```

6. Configure the router ID and the autonomous system number.

```
[edit routing-options]
user@P2# set router-id 10.9.9.3
user@P2# set autonomous-system 13979
```

7. If you are done configuring the device, commit the configuration.

```
user@P2# commit
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@P2# show interfaces
fe-1/2/0 {
  unit 3 {
    description P2-to-PE1;
    family inet {
      address 10.0.0.6/30;
    }
    family mpls;
  }
}
fe-1/2/1 {
  unit 5 {
    description P2-to-P1;
    family inet {
      address 10.0.0.30/30;
    }
    family mpls;
  }
}
fe-1/2/2 {
  unit 6 {
    description P2-to-PE4;
    family inet {
      address 10.0.0.13/30;
    }
    family mpls;
  }
}
lo0 {
```



```
    unit 5 {
      family inet {
        address 10.9.9.3/32;
        address 10.100.1.3/32;
      }
    }
  }

user@P2# show protocols
rsvp {
  interface fe-1/2/1.5;
  interface fe-1/2/2.6;
  interface fe-1/2/0.3;
}
mpls {
  label-switched-path P2-to-PE1 {
    to 10.9.9.1;
  }
  label-switched-path P2-to-P1 {
    to 10.9.9.2;
  }
  label-switched-path P2-to-PE4 {
    to 10.9.9.4;
  }
  interface fe-1/2/1.5;
  interface fe-1/2/2.6;
  interface fe-1/2/0.3;
}
bgp {
  group internal {
    type internal;
    local-address 10.9.9.3;
    family inet {
      labeled-unicast {
        aigp;
      }
    }
    neighbor 10.9.9.1;
    neighbor 10.9.9.2;
    neighbor 10.9.9.4;
  }
}
ospf {
  area 0.0.0.0 {
    interface fe-1/2/2.6 {
      metric 1;
    }
    interface 10.9.9.3 {
      passive;
      metric 1;
    }
    interface 10.100.1.3 {
      passive;
      metric 1;
    }
  }
}
```



```

}
user@P2# show routing-options
router-id 10.9.9.3;
autonomous-system 13979;

```

### Configuring Device PE4

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device PE4:

1. Configure the interfaces.

```

[edit interfaces]
user@PE4# set fe-1/2/0 unit 7 description PE4-to-P2
user@PE4# set fe-1/2/0 unit 7 family inet address 10.0.0.14/30
user@PE4# set fe-1/2/0 unit 7 family mpls
user@PE4# set fe-1/2/1 unit 9 description PE4-to-P1
user@PE4# set fe-1/2/1 unit 9 family inet address 10.0.0.18/30
user@PE4# set fe-1/2/1 unit 9 family mpls
user@PE4# set fe-1/2/2 unit 10 description PE4-to-PE2
user@PE4# set fe-1/2/2 unit 10 family inet address 10.0.0.21/30
user@PE4# set fe-1/2/2 unit 10 family mpls
user@PE4# set fe-1/0/2 unit 12 description PE4-to-PE3
user@PE4# set fe-1/0/2 unit 12 family inet address 10.0.0.25/30
user@PE4# set fe-1/0/2 unit 12 family mpls
user@PE4# set lo0 unit 7 family inet address 10.9.9.4/32
user@PE4# set lo0 unit 7 family inet address 10.100.1.4/32

```

2. Configure MPLS and a signaling protocol, such as RSVP or LDP.

```

[edit protocols]
user@PE4# set rsvp interface fe-1/2/0.7
user@PE4# set rsvp interface fe-1/2/1.9
user@PE4# set rsvp interface fe-1/2/2.10
user@PE4# set rsvp interface fe-1/0/2.12
user@PE4# set mpls label-switched-path PE4-to-PE2 to 10.9.9.5
user@PE4# set mpls label-switched-path PE4-to-PE3 to 10.9.9.6
user@PE4# set mpls label-switched-path PE4-to-P1 to 10.9.9.2
user@PE4# set mpls label-switched-path PE4-to-P2 to 10.9.9.3
user@PE4# set mpls interface fe-1/2/0.7
user@PE4# set mpls interface fe-1/2/1.9
user@PE4# set mpls interface fe-1/2/2.10
user@PE4# set mpls interface fe-1/0/2.12

```

3. Configure BGP.

```

[edit protocols bgp]
user@PE4# set export next-hop
user@PE4# set export aigp
user@PE4# set group internal type internal
user@PE4# set group internal local-address 10.9.9.4
user@PE4# set group internal neighbor 10.9.9.1
user@PE4# set group internal neighbor 10.9.9.3

```



```
user@PE4# set group internal neighbor 10.9.9.2
user@PE4# set group external type external
user@PE4# set group external multihop ttl 2
user@PE4# set group external local-address 10.9.9.4
user@PE4# set group external peer-as 7018
user@PE4# set group external neighbor 10.9.9.5
user@PE4# set group external neighbor 10.9.9.6
```

4. Enable AIGP.

```
[edit protocols bgp]
user@PE4# set group external family inet labeled-unicast aigp
user@PE4# set group internal family inet labeled-unicast aigp
```

5. Originate a prefix, and configure an AIGP distance.

By default, a prefix is originated using the current IGP distance. Optionally, you can configure a distance for the AIGP attribute, using the **distance** option, as shown here.

```
[edit policy-options policy-statement aigp term 10]
user@PE4# set from protocol static
user@PE4# set from route-filter 44.0.0.0/24 exact
user@PE4# set then aigp-originate distance 200
user@PE4# set then next-hop 10.100.1.4
user@PE4# set then accept
```

6. Enable the policies.

```
[edit policy-options policy-statement next-hop]
user@PE4# set term 10 from protocol bgp
user@PE4# set term 10 then next-hop 10.100.1.4
user@PE4# set term 10 then accept
user@PE4# set term 20 from protocol direct
user@PE4# set term 20 from route-filter 10.9.9.4/32 exact
user@PE4# set term 20 from route-filter 10.100.1.4/32 exact
user@PE4# set term 20 then next-hop 10.100.1.4
user@PE4# set term 20 then accept
```

7. Configure a static route.

```
[edit routing-options]
user@PE4# set static route 44.0.0.0/24 discard
```

8. Configure an IGP, such as OSPF, RIP, or IS-IS.

```
[edit protocols ospf]
user@PE4# set area 0.0.0.0 interface fe-1/2/1.9 metric 1
user@PE4# set area 0.0.0.0 interface fe-1/2/0.7 metric 1
user@PE4# set area 0.0.0.0 interface 10.9.9.4 passive
user@PE4# set area 0.0.0.0 interface 10.9.9.4 metric 1
user@PE4# set area 0.0.0.0 interface 10.100.1.4 passive
user@PE4# set area 0.0.0.0 interface 10.100.1.4 metric 1
user@PE4# set area 0.0.0.2 interface fe-1/2/2.10 metric 1
user@PE4# set area 0.0.0.3 interface fe-1/0/2.12 metric 1
```

9. Configure the router ID and the autonomous system number.

```
[edit routing-options]
```



```
user@PE4# set router-id 10.9.9.4
user@PE4# set autonomous-system 13979
```

10. If you are done configuring the device, commit the configuration.

```
user@PE4# commit
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@PE4# show interfaces
fe-1/0/2 {
  unit 12 {
    description PE4-to-PE3;
    family inet {
      address 10.0.0.25/30;
    }
    family mpls;
  }
}
fe-1/2/0 {
  unit 7 {
    description PE4-to-P2;
    family inet {
      address 10.0.0.14/30;
    }
    family mpls;
  }
}
fe-1/2/1 {
  unit 9 {
    description PE4-to-P1;
    family inet {
      address 10.0.0.18/30;
    }
    family mpls;
  }
}
fe-1/2/2 {
  unit 10 {
    description PE4-to-PE2;
    family inet {
      address 10.0.0.21/30;
    }
    family mpls;
  }
}
lo0 {
  unit 7 {
    family inet {
      address 10.9.9.4/32;
      address 10.100.1.4/32;
    }
  }
}
```



```
    }  
  }  
user@PE4# show policy-options  
policy-statement aigp {  
  term 10 {  
    from {  
      protocol static;  
      route-filter 44.0.0.0/24 exact;  
    }  
    then {  
      aigp-originate distance 200;  
      next-hop 10.100.1.4;  
      accept;  
    }  
  }  
}  
policy-statement next-hop {  
  term 10 {  
    from protocol bgp;  
    then {  
      next-hop 10.100.1.4;  
      accept;  
    }  
  }  
  term 20 {  
    from {  
      protocol direct;  
      route-filter 10.9.9.4/32 exact;  
      route-filter 10.100.1.4/32 exact;  
    }  
    then {  
      next-hop 10.100.1.4;  
      accept;  
    }  
  }  
}  
user@PE4# show protocols  
rsvp {  
  interface fe-1/2/0.7;  
  interface fe-1/2/1.9;  
  interface fe-1/2/2.10;  
  interface fe-1/0/2.12;  
}  
mpls {  
  label-switched-path PE4-to-PE2 {  
    to 10.9.9.5;  
  }  
  label-switched-path PE4-to-PE3 {  
    to 10.9.9.6;  
  }  
  label-switched-path PE4-to-P1 {  
    to 10.9.9.2;  
  }  
  label-switched-path PE4-to-P2 {  
    to 10.9.9.3;  
  }  
}
```



```

    }
    interface fe-1/2/0.7;
    interface fe-1/2/1.9;
    interface fe-1/2/2.10;
    interface fe-1/0/2.12;
  }
  bgp {
    export [ next-hop aigp ];
    group internal {
      type internal;
      local-address 10.9.9.4;
      family inet {
        labeled-unicast {
          aigp;
        }
      }
      neighbor 10.9.9.1;
      neighbor 10.9.9.3;
      neighbor 10.9.9.2;
    }
    group external {
      type external;
      multihop {
        ttl 2;
      }
      local-address 10.9.9.4;
      family inet {
        labeled-unicast {
          aigp;
        }
      }
      peer-as 7018;
      neighbor 10.9.9.5;
      neighbor 10.9.9.6;
    }
  }
  ospf {
    area 0.0.0.0 {
      interface fe-1/2/1.9 {
        metric 1;
      }
      interface fe-1/2/0.7 {
        metric 1;
      }
      interface 10.9.9.4 {
        passive;
        metric 1;
      }
      interface 10.100.1.4 {
        passive;
        metric 1;
      }
    }
    area 0.0.0.2 {
      interface fe-1/2/2.10 {
        metric 1;
      }
    }
  }

```



```
    }  
  }  
  area 0.0.0.3 {  
    interface fe-1/0/2.12 {  
      metric 1;  
    }  
  }  
}  
  
user@PE4# show routing-options  
static {  
  route 44.0.0.0/24 discard;  
}  
router-id 10.9.9.4;  
autonomous-system 13979;
```

### *Configuring Device PE1*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device PE1:

1. Configure the interfaces.

```
[edit interfaces]  
user@PE1# set fe-1/2/0 unit 0 description PE1-to-P1  
user@PE1# set fe-1/2/0 unit 0 family inet address 10.0.0.1/30  
user@PE1# set fe-1/2/0 unit 0 family mpls  
user@PE1# set fe-1/2/1 unit 2 description PE1-to-P2  
user@PE1# set fe-1/2/1 unit 2 family inet address 10.0.0.5/30  
user@PE1# set fe-1/2/1 unit 2 family mpls  
user@PE1# set fe-1/2/2 unit 14 description PE1-to-PE7  
user@PE1# set fe-1/2/2 unit 14 family inet address 10.0.0.9/30  
user@PE1# set lo0 unit 1 family inet address 10.9.9.1/32  
user@PE1# set lo0 unit 1 family inet address 10.100.1.1/32
```

2. Configure MPLS and a signaling protocol, such as RSVP or LDP.

```
[edit protocols]  
user@PE1# set rsvp interface fe-1/2/0.0  
user@PE1# set rsvp interface fe-1/2/1.2  
user@PE1# set rsvp interface fe-1/2/2.14  
user@PE1# set mpls label-switched-path PE1-to-P1 to 10.9.9.2  
user@PE1# set mpls label-switched-path PE1-to-P2 to 10.9.9.3  
user@PE1# set mpls interface fe-1/2/0.0  
user@PE1# set mpls interface fe-1/2/1.2  
user@PE1# set mpls interface fe-1/2/2.14
```

3. Configure BGP.

```
[edit protocols bgp]  
user@PE1# set group internal type internal  
user@PE1# set group internal local-address 10.9.9.1  
user@PE1# set group internal export SET_EXPORT_ROUTES  
user@PE1# set group internal vpn-apply-export
```



```

user@PE1# set group internal neighbor 10.9.9.4
user@PE1# set group internal neighbor 10.9.9.2
user@PE1# set group internal neighbor 10.9.9.3
user@PE1# set group external type external
user@PE1# set group external export SET_EXPORT_ROUTES
user@PE1# set group external peer-as 7019
user@PE1# set group external neighbor 10.0.0.10

```

4. Enable AIGP.

```

[edit protocols bgp]
user@PE1# set group internal family inet labeled-unicast aigp
user@PE1# set group external family inet labeled-unicast aigp

```

5. Enable the policies.

```

[edit policy-options policy-statement SET_EXPORT_ROUTES term 10]
user@PE1# set from protocol direct
user@PE1# set from protocol bgp
user@PE1# set then next-hop 10.100.1.1
user@PE1# set then accept

```

6. Configure an IGP, such as OSPF, RIP, or IS-IS.

```

[edit protocols ospf area 0.0.0.1]
user@PE1# set interface fe-1/2/0.0 metric 1
user@PE1# set interface fe-1/2/1.2 metric 1
user@PE1# set interface 10.9.9.1 passive
user@PE1# set interface 10.9.9.1 metric 1
user@PE1# set interface 10.100.1.1 passive
user@PE1# set interface 10.100.1.1 metric 1

```

7. Configure the router ID and the autonomous system number.

```

[edit routing-options]
user@PE1# set router-id 10.9.9.1
user@PE1# set autonomous-system 13979

```

8. If you are done configuring the device, commit the configuration.

```

user@PE1# commit

```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@PE1# show interfaces
fe-1/2/0 {
  unit 0 {
    description PE1-to-P1;
    family inet {
      address 10.0.0.1/30;
    }
    family mpls;
  }
}
fe-1/2/1 {

```



```
    unit 2 {
      description PE1-to-P2;
      family inet {
        address 10.0.0.5/30;
      }
      family mpls;
    }
  }
  fe-1/2/2 {
    unit 14 {
      description PE1-to-PE7;
      family inet {
        address 10.0.0.9/30;
      }
    }
  }
  lo0 {
    unit 1 {
      family inet {
        address 10.9.9.1/32;
        address 10.100.1.1/32;
      }
    }
  }
}

user@PE1# show policy-options
policy-statement SET_EXPORT_ROUTES {
  term 10 {
    from protocol [ direct bgp ];
    then {
      next-hop 10.100.1.1;
      accept;
    }
  }
}

user@PE1# show protocols
rsvp {
  interface fe-1/2/0.0;
  interface fe-1/2/1.2;
  interface fe-1/2/2.14;
}
mpls {
  label-switched-path PE1-to-P1 {
    to 10.9.9.2;
  }
  label-switched-path PE1-to-P2 {
    to 10.9.9.3;
  }
  interface fe-1/2/0.0;
  interface fe-1/2/1.2;
  interface fe-1/2/2.14;
}
bgp {
  group internal {
    type internal;
    local-address 10.9.9.1;
```



```

    family inet {
        labeled-unicast {
            aigp;
        }
    }
    export SET_EXPORT_ROUTES;
    vpn-apply-export;
    neighbor 10.9.9.4;
    neighbor 10.9.9.2;
    neighbor 10.9.9.3;
}
group external {
    type external;
    family inet {
        labeled-unicast {
            aigp;
        }
    }
    export SET_EXPORT_ROUTES;
    peer-as 7019;
    neighbor 10.0.0.10;
}
}
ospf {
    area 0.0.0.1 {
        interface fe-1/2/0.0 {
            metric 1;
        }
        interface fe-1/2/1.2 {
            metric 1;
        }
        interface 10.9.9.1 {
            passive;
            metric 1;
        }
        interface 10.100.1.1 {
            passive;
            metric 1;
        }
    }
}
}

```

```

user@PE1# show routing-options
router-id 10.9.9.1;
autonomous-system 13979;

```



### *Configuring Device PE2*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device PE2:

1. Configure the interfaces.

```
[edit interfaces]
user@PE2# set fe-1/2/0 unit 11 description PE2-to-PE4
user@PE2# set fe-1/2/0 unit 11 family inet address 10.0.0.22/30
user@PE2# set fe-1/2/0 unit 11 family mpls
user@PE2# set lo0 unit 9 family inet address 10.9.9.5/32 primary
user@PE2# set lo0 unit 9 family inet address 10.100.1.5/32
```

2. Configure MPLS and a signaling protocol, such as RSVP or LDP.

```
[edit protocols]
user@PE2# set rsvp interface fe-1/2/0.11
user@PE2# set mpls label-switched-path PE2-to-PE4 to 10.9.9.4
user@PE2# set mpls interface fe-1/2/0.11
```

3. Configure BGP.

```
[edit protocols bgp]
user@PE2# set group external type external
user@PE2# set group external multihop ttl 2
user@PE2# set group external local-address 10.9.9.5
user@PE2# set group external export next-hop
user@PE2# set group external export aigp
user@PE2# set group external export SET_EXPORT_ROUTES
user@PE2# set group external vpn-apply-export
user@PE2# set group external peer-as 13979
user@PE2# set group external neighbor 10.9.9.4
```

4. Enable AIGP.

```
[edit protocols bgp]
user@PE2# set group external family inet labeled-unicast aigp
```

5. Originate a prefix, and configure an AIGP distance.

By default, a prefix is originated using the current IGP distance. Optionally, you can configure a distance for the AIGP attribute, using the **distance** option, as shown here.

```
[edit policy-options policy-statement aigp]
user@PE2# set term 10 from route-filter 55.0.0.0/24 exact
user@PE2# set term 10 then aigp-originate distance 20
user@PE2# set term 10 then next-hop 10.100.1.5
user@PE2# set term 10 then accept
user@PE2# set term 20 from route-filter 99.0.0.0/24 exact
user@PE2# set term 20 then aigp-originate distance 30
user@PE2# set term 20 then next-hop 10.100.1.5
user@PE2# set term 20 then accept
```



6. Enable the policies.

```
[edit policy-options]
user@PE2# set policy-statement SET_EXPORT_ROUTES term 10 from protocol
direct
user@PE2# set policy-statement SET_EXPORT_ROUTES term 10 from protocol
static
user@PE2# set policy-statement SET_EXPORT_ROUTES term 10 from protocol
bgp
user@PE2# set policy-statement SET_EXPORT_ROUTES term 10 then next-hop
10.100.1.5
user@PE2# set policy-statement SET_EXPORT_ROUTES term 10 then accept
user@PE2# set policy-statement next-hop term 10 from protocol bgp
user@PE2# set policy-statement next-hop term 10 then next-hop 10.100.1.5
user@PE2# set policy-statement next-hop term 10 then accept
user@PE2# set policy-statement next-hop term 20 from protocol direct
user@PE2# set policy-statement next-hop term 20 from route-filter 10.9.9.5/32
exact
user@PE2# set policy-statement next-hop term 20 from route-filter 10.100.1.5/32
exact
user@PE2# set policy-statement next-hop term 20 then next-hop 10.100.1.5
user@PE2# set policy-statement next-hop term 20 then accept
```

7. Enable some static routes.

```
[edit routing-options]
user@PE2# set static route 99.0.0.0/24 discard
user@PE2# set static route 55.0.0.0/24 discard
```

8. Configure an IGP, such as OSPF, RIP, or IS-IS.

```
[edit protocols ospf area 0.0.0.2]
user@PE2# set interface 10.9.9.5 passive
user@PE2# set interface 10.9.9.5 metric 1
user@PE2# set interface 10.100.1.5 passive
user@PE2# set interface 10.100.1.5 metric 1
user@PE2# set interface fe-1/2/0.11 metric 1
```

9. Configure the router ID and the autonomous system number.

```
[edit routing-options]
user@PE2# set router-id 10.9.9.5
user@PE2# set autonomous-system 7018
```

10. If you are done configuring the device, commit the configuration.

```
user@PE2# commit
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@PE2# show interfaces
fe-1/2/0 {
  unit 11 {
    description PE2-to-PE4;
```



```
        family inet {
            address 10.0.0.22/30;
        }
        family mpls;
    }
}
lo0 {
    unit 9 {
        family inet {
            address 10.9.9.5/32 {
                primary;
            }
            address 10.100.1.5/32;
        }
    }
}

user@PE2# show policy-options
policy-statement SET_EXPORT_ROUTES {
    term 10 {
        from protocol [ direct static bgp ];
        then {
            next-hop 10.100.1.5;
            accept;
        }
    }
}

policy-statement aigp {
    term 10 {
        from {
            route-filter 55.0.0.0/24 exact;
        }
        then {
            aigp-originate distance 20;
            next-hop 10.100.1.5;
            accept;
        }
    }
    term 20 {
        from {
            route-filter 99.0.0.0/24 exact;
        }
        then {
            aigp-originate distance 30;
            next-hop 10.100.1.5;
            accept;
        }
    }
}

policy-statement next-hop {
    term 10 {
        from protocol bgp;
        then {
            next-hop 10.100.1.5;
            accept;
        }
    }
}
```



```

    }
    term 20 {
        from {
            protocol direct;
            route-filter 10.9.9.5/32 exact;
            route-filter 10.100.1.5/32 exact;
        }
        then {
            next-hop 10.100.1.5;
            accept;
        }
    }
}

user@PE2# show protocols
rsvp {
    interface fe-1/2/0.11;
}
mpls {
    label-switched-path PE2-to-PE4 {
        to 10.9.9.4;
    }
    interface fe-1/2/0.11;
}
bgp {
    group external {
        type external;
        multihop {
            ttl 2;
        }
        local-address 10.9.9.5;
        family inet {
            labeled-unicast {
                aigp;
            }
        }
        export [ next-hop aigp SET_EXPORT_ROUTES ];
        vpn-apply-export;
        peer-as 13979;
        neighbor 10.9.9.4;
    }
}
ospf {
    area 0.0.0.2 {
        interface 10.9.9.5 {
            passive;
            metric 1;
        }
        interface 10.100.1.5 {
            passive;
            metric 1;
        }
        interface fe-1/2/0.11 {
            metric 1;
        }
    }
}

```



```
}
user@PE2# show routing-options
static {
    route 99.0.0.0/24 discard;
    route 55.0.0.0/24 discard;
}
router-id 10.9.9.5;
autonomous-system 7018;
```

### *Configuring Device PE3*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure Device PE3:

1. Configure the interfaces.

```
[edit interfaces]
user@PE3# set fe-1/2/0 unit 13 description PE3-to-PE4
user@PE3# set fe-1/2/0 unit 13 family inet address 10.0.0.26/30
user@PE3# set fe-1/2/0 unit 13 family mpls
user@PE3# set lo0 unit 11 family inet address 10.9.9.6/32
user@PE3# set lo0 unit 11 family inet address 10.100.1.6/32
```

2. Configure MPLS and a signaling protocol, such as RSVP or LDP.

```
[edit protocols]
user@PE3# set rsvp interface fe-1/2/0.13
user@PE3# set mpls label-switched-path PE3-to-PE4 to 10.9.9.4
user@PE3# set mpls interface fe-1/2/0.13
```

3. Configure BGP.

```
[edit protocols bgp group external]
user@PE3# set type external
user@PE3# set multihop ttl 2
user@PE3# set local-address 10.9.9.6
user@PE3# set export next-hop
user@PE3# set export SET_EXPORT_ROUTES
user@PE3# set vpn-apply-export
user@PE3# set peer-as 13979
user@PE3# set neighbor 10.9.9.4
```

4. Enable AIGP.

```
[edit protocols bgp group external]
user@PE3# set family inet labeled-unicast aigp
```

5. Enable the policies.

```
[edit policy-options]
user@PE3# set policy-statement SET_EXPORT_ROUTES term 10 from protocol
    direct
user@PE3# set policy-statement SET_EXPORT_ROUTES term 10 from protocol
    static
```



```

user@PE3# set policy-statement SET_EXPORT_ROUTES term 10 from protocol
bgp
user@PE3# set policy-statement SET_EXPORT_ROUTES term 10 then next-hop
10.100.1.6
user@PE3# set policy-statement SET_EXPORT_ROUTES term 10 then accept
user@PE3# set policy-statement next-hop term 10 from protocol bgp
user@PE3# set policy-statement next-hop term 10 then next-hop 10.100.1.6
user@PE3# set policy-statement next-hop term 10 then accept
user@PE3# set policy-statement next-hop term 20 from protocol direct
user@PE3# set policy-statement next-hop term 20 from route-filter 10.9.9.6/32
exact
user@PE3# set policy-statement next-hop term 20 from route-filter 10.100.1.6/32
exact
user@PE3# set policy-statement next-hop term 20 then next-hop 10.100.1.6
user@PE3# set policy-statement next-hop term 20 then accept

```

6. Configure an IGP, such as OSPF, RIP, or IS-IS.

```

[edit protocols ospf area 0.0.0.3]
user@PE3# set interface 10.9.9.6 passive
user@PE3# set interface 10.9.9.6 metric 1
user@PE3# set interface 10.100.1.6 passive
user@PE3# set interface 10.100.1.6 metric 1
user@PE3# set interface fe-1/2/0.13 metric 1

```

7. Configure the router ID and the autonomous system number.

```

[edit routing-options]
user@PE3# set router-id 10.9.9.6
user@PE3# set autonomous-system 7018

```

8. If you are done configuring the device, commit the configuration.

```

user@PE3# commit

```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@PE3# show interfaces
fe-1/2/0 {
  unit 13 {
    description PE3-to-PE4;
    family inet {
      address 10.0.0.26/30;
    }
    family mpls;
  }
}
lo0 {
  unit 11 {
    family inet {
      address 10.9.9.6/32;
      address 10.100.1.6/32;
    }
  }
}

```



```
    }  
  }  
user@PE3# show policy-options  
policy-statement SET_EXPORT_ROUTES {  
  term 10 {  
    from protocol [ direct static bgp ];  
    then {  
      next-hop 10.100.1.6;  
      accept;  
    }  
  }  
}  
policy-statement next-hop {  
  term 10 {  
    from protocol bgp;  
    then {  
      next-hop 10.100.1.6;  
      accept;  
    }  
  }  
  term 20 {  
    from {  
      protocol direct;  
      route-filter 10.9.9.6/32 exact;  
      route-filter 10.100.1.6/32 exact;  
    }  
    then {  
      next-hop 10.100.1.6;  
      accept;  
    }  
  }  
}  
user@PE3# show protocols  
rsvp {  
  interface fe-1/2/0.13;  
}  
mpls {  
  label-switched-path PE3-to-PE4 {  
    to 10.9.9.4;  
  }  
  interface fe-1/2/0.13;  
}  
bgp {  
  group external {  
    type external;  
    multihop {  
      ttl 2;  
    }  
    local-address 10.9.9.6;  
    family inet {  
      labeled-unicast {  
        aigp;  
      }  
    }  
  }  
  export [ next-hop SET_EXPORT_ROUTES ];
```



```

        vpn-apply-export;
        peer-as 13979;
        neighbor 10.9.9.4;
    }
}
ospf {
    area 0.0.0.3 {
        interface 10.9.9.6 {
            passive;
            metric 1;
        }
        interface 10.100.1.6 {
            passive;
            metric 1;
        }
        interface fe-1/2/0.13 {
            metric 1;
        }
    }
}

user@PE3# show routing-options
router-id 10.9.9.6;
autonomous-system 7018;

```

### Configuring Device PE7

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure Device PE7:

1. Configure the interfaces.

```

[edit interfaces]
user@PE7# set fe-1/2/0 unit 15 description PE7-to-PE1
user@PE7# set fe-1/2/0 unit 15 family inet address 10.0.0.10/30
user@PE7# set lo0 unit 13 family inet address 10.9.9.7/32
user@PE7# set lo0 unit 13 family inet address 10.100.1.7/32

```

2. Configure BGP.

```

[edit protocols bgp group external]
user@PE7# set type external
user@PE7# set export SET_EXPORT_ROUTES
user@PE7# set peer-as 13979
user@PE7# set neighbor 10.0.0.9

```

3. Enable AIGP.

```

[edit protocols bgp group external]
user@PE7# set family inet labeled-unicast aigp

```

4. Configure the routing policy.

```

[edit policy-options policy-statement SET_EXPORT_ROUTES term 10]
user@PE7# set from protocol direct

```



```
user@PE7# set from protocol bgp
user@PE7# set then next-hop 10.100.1.7
user@PE7# set then accept
```

5. Configure the router ID and the autonomous system number.

```
[edit routing-options]
user@PE7# set router-id 10.9.9.7
user@PE7# set autonomous-system 7019
```

6. If you are done configuring the device, commit the configuration.

```
user@PE7# commit
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@PE7# show interfaces
interfaces {
  fe-1/2/0 {
    unit 15 {
      description PE7-to-PE1;
      family inet {
        address 10.0.0.10/30;
      }
    }
  }
  lo0 {
    unit 13 {
      family inet {
        address 10.9.9.7/32;
        address 10.100.1.7/32;
      }
    }
  }
}

user@PE7# show policy-options
policy-statement SET_EXPORT_ROUTES {
  term 10 {
    from protocol [ direct bgp ];
    then {
      next-hop 10.100.1.7;
      accept;
    }
  }
}

user@PE7# show protocols
bgp {
  group external {
    type external;
    family inet {
      labeled-unicast {
        aigp;
      }
    }
  }
}
```



```

    }
  }
  export SET_EXPORT_ROUTES;
  peer-as 13979;
  neighbor 10.0.0.9;
}
}

user@PE7# show routing-options
router-id 10.9.9.7;
autonomous-system 7019;

```

### Verification

Confirm that the configuration is working properly.

- [Verifying That Device PE4 Is Receiving the AIGP Attribute from Its EBGp Neighbor PE2 on page 2793](#)
- [Checking the IGP Metric on page 2793](#)
- [Verifying That Device PE4 Adds the IGP Metric to the AIGP Attribute on page 2794](#)
- [Verifying That Device PE7 Is Receiving the AIGP Attribute from Its EBGp Neighbor PE1 on page 2794](#)
- [Verifying the Resolving AIGP Metric on page 2795](#)
- [Verifying the Presence of AIGP Attributes in BGP Updates on page 2798](#)

### *Verifying That Device PE4 Is Receiving the AIGP Attribute from Its EBGp Neighbor PE2*

**Purpose** Make sure that the AIGP policy on Device PE2 is working.

**Action**

```

user@PE4> show route receive-protocol bgp 10.9.9.5 extensive
* 55.0.0.0/24 (1 entry, 1 announced)
  Accepted
  Route Label: 299888
  Nexthop: 10.100.1.5
  AS path: 7018 I
  AIGP: 20

* 99.0.0.0/24 (1 entry, 1 announced)
  Accepted
  Route Label: 299888
  Nexthop: 10.100.1.5
  AS path: 7018 I
  AIGP: 30

```

**Meaning** On Device PE2, the **aigp-originate** statement is configured with a distance of 20 (**aigp-originate distance 20**). This statement is applied to route 55.0.0.0/24. Likewise, the **aigp-originate distance 30** statement is applied to route 99.0.0.0/24. Thus, when Device PE4 receives these routes, the AIGP attribute is attached with the configured metrics.

### *Checking the IGP Metric*

**Purpose** From Device PE4, check the IGP metric to the BGP next hop 10.100.1.5.



**Action** user@PE4> show route 10.100.1.5  
inet.0: 30 destinations, 40 routes (30 active, 0 holddown, 0 hidden)  
+ = Active Route, - = Last Active, \* = Both

10.100.1.5/32      \* [OSPF/10] 05:35:50, metric 2  
                    > to 10.0.0.22 via fe-1/2/2.10  
                    [BGP/170] 03:45:07, localpref 100, from 10.9.9.5  
                    AS path: 7018 I  
                    > to 10.0.0.22 via fe-1/2/2.10

**Meaning** The IGP metric for this route is 2.

***Verifying That Device PE4 Adds the IGP Metric to the AIGP Attribute***

**Purpose** Make sure that Device PE4 adds the IGP metric to the AIGP attribute when it readvertises routes to its IBGP neighbor, Device PE1.

**Action** user@PE4> show route advertising-protocol bgp 10.9.9.1 extensive

\* 55.0.0.0/24 (1 entry, 1 announced)  
BGP group internal type Internal  
Route Label: 300544  
Nexthop: 10.100.1.4  
Flags: Nexthop Change  
Localpref: 100  
AS path: [13979] 7018 I  
AIGP: 22

\* 99.0.0.0/24 (1 entry, 1 announced)  
BGP group internal type Internal  
Route Label: 300544  
Nexthop: 10.100.1.4  
Flags: Nexthop Change  
Localpref: 100  
AS path: [13979] 7018 I  
AIGP: 32

**Meaning** The IGP metric is added to the AIGP metric ( $20 + 2 = 22$  and  $30 + 2 = 32$ ), because the next hop is changed for these routes.

***Verifying That Device PE7 Is Receiving the AIGP Attribute from Its EBGp Neighbor PE1***

**Purpose** Make sure that the AIGP policy on Device PE1 is working.



**Action** user@PE7> show route receive-protocol bgp 10.0.0.9 extensive

```
* 44.0.0.0/24 (1 entry, 1 announced)
  Accepted
  Route Label: 300096
  Nexthop: 10.0.0.9
  AS path: 13979 I
  AIGP: 203

* 55.0.0.0/24 (1 entry, 1 announced)
  Accepted
  Route Label: 300112
  Nexthop: 10.0.0.9
  AS path: 13979 7018 I
  AIGP: 25

* 99.0.0.0/24 (1 entry, 1 announced)
  Accepted
  Route Label: 300112
  Nexthop: 10.0.0.9
  AS path: 13979 7018 I
  AIGP: 35
```

**Meaning** The 44.0.0.0/24 route is originated at Device PE4. The 55.0.0.0/24 and 99.0.0.0/24 routes are originated at Device PE2. The IGP distances are added to the configured AIGP distances.

#### *Verifying the Resolving AIGP Metric*

**Purpose** Confirm that if the prefix is resolved through recursion and the recursive next hops have AIGP metrics, the prefix has the sum of the AIGP values that are on the recursive BGP next hops.

**Action**

1. Add a static route to 66.0.0.0/24.  
[edit routing-options]  
user@PE2# set static route 66.0.0.0/24 discard
2. Delete the existing terms in the **aigp** policy statement on Device PE2.  
[edit policy-options policy-statement aigp]  
user@PE2# delete term 10  
user@PE2# delete term 20

3. Configure a recursive route lookup for the route to 66.0.0.0.

The policy shows the AIGP metric for prefix 66.0.0.0/24 (none) and its recursive next hop. Prefix 66.0.0.0/24 is resolved by 55.0.0.1. Prefix 66.0.0.0/24 does not have its own AIGP metric being originated, but its recursive next hop, 55.0.0.1, has an AIGP value.

```
[edit policy-options policy-statement aigp]
user@PE2# set term 10 from route-filter 55.0.0.1/24 exact
user@PE2# set term 10 then aigp-originate distance 20
user@PE2# set term 10 then next-hop 10.100.1.5
user@PE2# set term 10 then accept
user@PE2# set term 20 from route-filter 66.0.0.0/24 exact
user@PE2# set term 20 then next-hop 55.0.0.1
user@PE2# set term 20 then accept
```



4. On Device PE4, run the **show route 55.0.0.0 extensive** command.

The value of Metric2 is the IGP metric to the BGP next hop. When Device PE4 readvertises these routes to its IBGP peer, Device PE1, the AIGP metric is the sum of AIGP + its Resolving AIGP metric + Metric2.

Prefix 55.0.0.0 shows its own IGP metric 20, as defined and advertised by Device PE2. It does not show a resolving AIGP value because it does not have a recursive BGP next hop. The value of Metric2 is 2.

```

user@PE4> show route 55.0.0.0 extensive
inet.0: 31 destinations, 41 routes (31 active, 0 holddown, 0 hidden)
55.0.0.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 55.0.0.0/24 -> {indirect(262151)}
Page 0 idx 0 Type 1 val 928d1b8
  Flags: Nexthop Change
  Nexthop: 10.100.1.4
  Localpref: 100
  AS path: [13979] 7018 I
  Communities:
  AIGP: 22
Path 55.0.0.0 from 10.9.9.5 Vector len 4. Val: 0
  *BGP Preference: 170/-101
    Next hop type: Indirect
    Address: 0x925da38
    Next-hop reference count: 4
    Source: 10.9.9.5
    Next hop type: Router, Next hop index: 1004
    Next hop: 10.0.0.22 via fe-1/2/2.10, selected
    Label operation: Push 299888
    Label TTL action: prop-ttl
    Protocol next hop: 10.100.1.5
    Push 299888
    Indirect next hop: 93514d8 262151
    State: <Active Ext>
    Local AS: 13979 Peer AS: 7018
    Age: 22:03:26 Metric2: 2
    AIGP: 20
    Task: BGP_7018.10.9.9.5+58560
    Announcement bits (3): 3-KRT 4-BGP_RT_Background 5-Resolve

tree 1
  AS path: 7018 I
  Accepted
  Route Label: 299888
  Localpref: 100
  Router ID: 10.9.9.5
  Indirect next hops: 1
    Protocol next hop: 10.100.1.5 Metric: 2
    Push 299888
    Indirect next hop: 93514d8 262151
    Indirect path forwarding next hops: 1
      Next hop type: Router
      Next hop: 10.0.0.22 via fe-1/2/2.10
    10.100.1.5/32 Originating RIB: inet.0
      Metric: 2 Node path count: 1
      Forwarding nexthops: 1
        Nexthop: 10.0.0.22 via fe-1/2/2.10

```

5. On Device PE4, run the **show route 66.0.0.0 extensive** command.



Prefix 66.0.0.0/24 shows the Resolving AIGP, which is the sum of its own AIGP metric and its recursive BGP next hop:

66.0.0.1 = 0, 55.0.0.1 = 20, 0+20 = 20

```

user@PE4> show route 66.0.0.0 extensive
inet.0: 31 destinations, 41 routes (31 active, 0 holddown, 0 hidden)
66.0.0.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 66.0.0.0/24 -> {indirect(262162)}
Page 0 idx 0 Type 1 val 928cefc
  Flags: Nexthop Change
  Nexthop: 10.100.1.4
  Localpref: 100
  AS path: [13979] 7018 I
  Communities:
Path 66.0.0.0 from 10.9.9.5 Vector len 4. Val: 0
  *BGP Preference: 170/-101
    Next hop type: Indirect
    Address: 0x925d4e0
    Next-hop reference count: 4
    Source: 10.9.9.5
    Next hop type: Router, Next hop index: 1006
    Next hop: 10.0.0.22 via fe-1/2/2.10, selected
    Label operation: Push 299888, Push 299888(top)
    Label TTL action: prop-ttl, prop-ttl(top)
    Protocol next hop: 55.0.0.1
    Push 299888
    Indirect next hop: 9353e88 262162
    State: <Active Ext>
    Local AS: 13979 Peer AS: 7018
    Age: 31:42 Metric2: 2
    Resolving-AIGP: 20
    Task: BGP_7018.10.9.9.5+58560
    Announcement bits (3): 3-KRT 4-BGP_RT_Background 5-Resolve

tree 1
  AS path: 7018 I
  Accepted
  Route Label: 299888
  Localpref: 100
  Router ID: 10.9.9.5
  Indirect next hops: 1
    Protocol next hop: 55.0.0.1 Metric: 2 AIGP: 20
    Push 299888
    Indirect next hop: 9353e88 262162
    Indirect path forwarding next hops: 1
      Next hop type: Router
      Next hop: 10.0.0.22 via fe-1/2/2.10
    55.0.0.0/24 Originating RIB: inet.0
      Metric: 2 Node path count: 1
      Indirect nexthops: 1
        Protocol Nexthop: 10.100.1.5 Metric: 2 Push

299888
      Indirect nexthop: 93514d8 262151
      Indirect path forwarding nexthops: 1
        Nexthop: 10.0.0.22 via fe-1/2/2.10
        10.100.1.5/32 Originating RIB: inet.0
          Metric: 2 Node

path count: 1
      Forwarding nexthops: 1
        Nexthop: 10.0.0.22 via fe-1/2/2.10

```



### *Verifying the Presence of AIGP Attributes in BGP Updates*

**Purpose** If the AIGP attribute is not enabled under BGP (or the **group** or **neighbor** hierarchies), the AIGP attribute is silently discarded. Enable **traceoptions** and include the **packets** flag in the **detail** option in the configuration to confirm the presence of the AIGP attribute in transmitted or received BGP updates. This is useful when debugging AIGP issues.

**Action** 1. Configure Device PE2 and Device PE4 for **traceoptions**.

```
user@host> show protocols bgp
traceoptions {
  file bgp size 1m files 5;
  flag packets detail;
}
```

2. Check the **traceoptions** file on Device PE2.

The following sample shows Device PE2 advertising prefix 99.0.0.0/24 to Device PE4 (10.9.9.4) with an AIGP metric of 20:

```
user@PE2> show log bgp
Mar 22 09:27:18.982150 BGP SEND 10.9.9.5+49652 -> 10.9.9.4+179
Mar 22 09:27:18.982178 BGP SEND message type 2 (Update) length 70
Mar 22 09:27:18.982198 BGP SEND Update PDU length 70
Mar 22 09:27:18.982248 BGP SEND flags 0x40 code Origin(1): IGP
Mar 22 09:27:18.982273 BGP SEND flags 0x40 code ASPath(2) length 6: 7018
Mar 22 09:27:18.982295 BGP SEND flags 0x80 code AIGP(26): AIGP: 20
Mar 22 09:27:18.982316 BGP SEND flags 0x90 code MP_reach(14): AFI/SAFI 1/4
Mar 22 09:27:18.982341 BGP SEND      nhop 10.100.1.5 len 4
Mar 22 09:27:18.982372 BGP SEND    99.0.0.0/24 (label 301664)
Mar 22 09:27:33.665412 bgp_send: sending 19 bytes to abcd::10:255:170:84
(External AS 13979)
```

3. Verify that the route was received on Device PE4 using the **show route receive-protocol** command.

AIGP is not enabled on Device PE4, so the AIGP attribute is silently discarded for prefix 99.0.0.0/24 and does not appear in the following output:

```
user@PE4> show route receive-protocol bgp 10.9.9.5 extensive | find 55.0.0.0
* 99.0.0.0/24 (2 entries, 1 announced)
  Accepted
  Route Label: 301728
  Nexthop: 10.100.1.5
  AS path: 7018 I
```

4. Check the **traceoptions** file on Device PE4.

The following output from the **traceoptions** log shows that the 99.0.0.0/24 prefix was received with the AIGP attribute attached:

```
user@PE4> show log bgp
Mar 22 09:41:39.650295 BGP RECV 10.9.9.5+64690 -> 10.9.9.4+179
Mar 22 09:41:39.650331 BGP RECV message type 2 (Update) length 70
Mar 22 09:41:39.650350 BGP RECV Update PDU length 70
Mar 22 09:41:39.650370 BGP RECV flags 0x40 code Origin(1): IGP
Mar 22 09:41:39.650394 BGP RECV flags 0x40 code ASPath(2) length 6: 7018
Mar 22 09:41:39.650415 BGP RECV flags 0x80 code AIGP(26): AIGP: 20
Mar 22 09:41:39.650436 BGP RECV flags 0x90 code MP_reach(14): AFI/SAFI 1/4
Mar 22 09:41:39.650459 BGP RECV      nhop 10.100.1.5 len 4
```



```

Mar 22 09:41:39.650495 BGP RECV    99.0.0.0/24 (label 301728)
Mar 22 09:41:39.650574 bgp_rcv_nlri: 99.0.0.0/24
Mar 22 09:41:39.650607 bgp_rcv_nlri: 99.0.0.0/24 belongs to meshgroup
Mar 22 09:41:39.650629 bgp_rcv_nlri: 99.0.0.0/24 qualified bnp->ribact 0x0
12afcb 0x0

```

**Meaning** Performing this verification helps with AIGP troubleshooting and debugging issues. It enables you to verify which devices in your network send and receive AIGP attributes.

- Related Documentation**
- [Understanding BGP Path Selection on page 2827](#)
  - [Examples: Configuring Internal BGP Peering on page 2666](#)

## BGP Policy Configuration

- [Example: Configuring BGP Interactions with IGP on page 2799](#)
- [Example: Configuring BGP Route Advertisement on page 2803](#)
- [Example: Configuring EBGp Multihop on page 2811](#)
- [Example: Configuring BGP Route Preference \(Administrative Distance\) on page 2820](#)
- [Example: Configuring BGP Path Selection on page 2826](#)
- [Example: Removing Private AS Numbers on page 2837](#)

### Example: Configuring BGP Interactions with IGP

- [Understanding Routing Policies on page 2799](#)
- [Example: Injecting OSPF Routes into the BGP Routing Table on page 2800](#)

#### Understanding Routing Policies

Each routing policy is identified by a policy name. The name can contain letters, numbers, and hyphens (-) and can be up to 255 characters long. To include spaces in the name, enclose the entire name in double quotation marks. Each routing policy name must be unique within a configuration.

Once a policy is created and named, it must be applied before it is active. You apply routing policies using the **import** and **export** statements at the **protocols>protocol-name** level in the configuration hierarchy.

In the **import** statement, you list the name of the routing policy to be evaluated when routes are imported into the routing table from the routing protocol.

In the **export** statement, you list the name of the routing policy to be evaluated when routes are being exported from the routing table into a dynamic routing protocol. Only active routes are exported from the routing table.

To specify more than one policy and create a policy chain, you list the policies using a space as a separator. If multiple policies are specified, the policies are evaluated in the order in which they are specified. As soon as an accept or reject action is executed, the policy chain evaluation ends.



### Example: Injecting OSPF Routes into the BGP Routing Table

---

This example shows how to create a policy that injects OSPF routes into the BGP routing table.

- [Requirements on page 2800](#)
- [Overview on page 2800](#)
- [Configuration on page 2800](#)
- [Verification on page 2802](#)
- [Troubleshooting on page 2802](#)

#### Requirements

Before you begin:

- Configure network interfaces.
- Configure external peer sessions. See [“Example: Configuring External BGP Point-to-Point Peer Sessions” on page 2644](#).
- Configure interior gateway protocol (IGP) sessions between peers.

#### Overview

In this example, you create a routing policy called **injectpolicy1** and a routing term called **injectterm1**. The policy injects OSPF routes into the BGP routing table.

#### Configuration

- [Configuring the Routing Policy on page 2800](#)
- [Configuring Tracing for the Routing Policy on page 2801](#)

#### Configuring the Routing Policy

##### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set policy-options policy-statement injectpolicy1 term injectterm1 from protocol ospf
set policy-options policy-statement injectpolicy1 term injectterm1 from area 0.0.0.1
set policy-options policy-statement injectpolicy1 term injectterm1 then accept
set protocols bgp export injectpolicy1
```

##### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To inject OSPF routes into a BGP routing table:

1. Create the policy term.

```
[edit policy-options policy-statement injectpolicy1]
user@host# set term injectterm1
```



- Specify OSPF as a match condition.

```
[edit policy-options policy-statement injectpolicy1 term injectterm1]
user@host# set from protocol ospf
```

- Specify the routes from an OSPF area as a match condition.

```
[edit policy-options policy-statement injectpolicy1 term injectterm1]
user@host# set from area 0.0.0.1
```

- Specify that the route is to be accepted if the previous conditions are matched.

```
[edit policy-options policy-statement injectpolicy1 term injectterm1]
user@host# set then accept
```

- Apply the routing policy to BGP.

```
[edit]
user@host# set protocols bgp export injectpolicy1
```

**Results** Confirm your configuration by entering the **show policy-options** and **show protocols bgp** commands from configuration mode. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show policy-options
policy-statement injectpolicy1 {
  term injectterm1 {
    from {
      protocol ospf;
      area 0.0.0.1;
    }
    then accept;
  }
}

user@host# show protocols bgp
export injectpolicy1;
```

If you are done configuring the device, enter **commit** from configuration mode.

### *Configuring Tracing for the Routing Policy*

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set policy-options policy-statement injectpolicy1 term injectterm1 then trace
set routing-options traceoptions file ospf-bgp-policy-log
set routing-options traceoptions file size 5m
set routing-options traceoptions file files 5
set routing-options traceoptions flag policy
```



**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

1. Include a trace action in the policy.

```
[edit policy-options policy-statement injectpolicy] term injectterm1]
user@host# then trace
```

2. Configure the tracing file for the output.

```
[edit routing-options traceoptions]
user@host# set file ospf-bgp-policy-log
user@host# set file size 5m
user@host# set file files 5
user@host# set flag policy
```

**Results** Confirm your configuration by entering the **show policy-options** and **show routing-options** commands from configuration mode. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show policy-options
policy-statement injectpolicy1 {
  term injectterm1 {
    then {
      trace;
    }
  }
}

user@host# show routing-options
traceoptions {
  file ospf-bgp-policy-log size 5m files 5;
  flag policy;
}
```

If you are done configuring the device, enter **commit** from configuration mode.

### **Verification**

Confirm that the configuration is working properly.

### **Verifying That the Expected BGP Routes Are Present**

**Purpose** Verify the effect of the export policy.

**Action** From operational mode, enter the **show route** command.

### **Troubleshooting**

- [Using the show log Command to Examine the Actions of the Routing Policy on page 2802](#)

### **Using the show log Command to Examine the Actions of the Routing Policy**

**Problem** The routing table contains unexpected routes, or routes are missing from the routing table.



**Solution** If you configure policy tracing as shown in this example, you can run the **show log ospf-bgp-policy-log** command to diagnose problems with the routing policy. The **show log ospf-bgp-policy-log** command displays information about the routes that the **injectpolicy1** policy term analyzes and acts upon.

**Related Documentation**

- [Understanding External BGP Peering Sessions on page 2643](#)
- [BGP Configuration Overview](#)

## Example: Configuring BGP Route Advertisement

- [Understanding Route Advertisement on page 2803](#)
- [Example: Configuring BGP Prefix-Based Outbound Route Filtering on page 2807](#)

### Understanding Route Advertisement

All routing protocols use the Junos OS routing table to store the routes that they learn and to determine which routes they should advertise in their protocol packets. Routing policy allows you to control which routes the routing protocols store in and retrieve from the routing table. For information about routing policy, see the Routing Policy Configuration Guide.

When configuring BGP routing policy, you can perform the following tasks:

- [Applying Routing Policy on page 2803](#)
- [Setting BGP to Advertise Inactive Routes on page 2804](#)
- [Configuring BGP to Advertise the Best External Route to Internal Peers on page 2804](#)
- [Configuring How Often BGP Exchanges Routes with the Routing Table on page 2806](#)
- [Disabling Suppression of Route Advertisements on page 2807](#)

### Applying Routing Policy

You define routing policy at the **[edit policy-options]** hierarchy level. To apply policies you have defined for BGP, include the **import** and **export** statements within the BGP configuration. For information about defining policy, see the Routing Policy Configuration Guide.

You can apply policies as follows:

- BGP global **import** and **export** statements—Include these statements at the **[edit protocols bgp]** hierarchy level (for routing instances, include these statements at the **[edit routing-instances routing-instance-name protocols bgp]** hierarchy level).
- Group **import** and **export** statements—Include these statements at the **[edit protocols bgp group group-name]** hierarchy level (for routing instances, include these statements at the **[edit routing-instances routing-instance-name protocols bgp group group-name]** hierarchy level).
- Peer **import** and **export** statements—Include these statements at the **[edit protocols bgp group group-name neighbor address]** hierarchy level (for routing instances, include



these statements at the `[edit routing-instances routing-instance-name protocols bgp group group-name neighbor address]` hierarchy level).

A peer-level **import** or **export** statement overrides a group **import** or **export** statement. A group-level **import** or **export** statement overrides a global BGP **import** or **export** statement.

To apply policies, see the following sections:

- [Applying Policies to Routes Being Imported into the Routing Table from BGP on page 2804](#)
- [Applying Policies to Routes Being Exported from the Routing Table into BGP on page 2804](#)

#### ***Applying Policies to Routes Being Imported into the Routing Table from BGP***

To apply policy to routes being imported into the routing table from BGP, include the **import** statement, listing the names of one or more policies to be evaluated:

```
import [ policy-names ];
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

If you specify more than one policy, they are evaluated in the order specified, from first to last, and the first matching filter is applied to the route. If no match is found, BGP places into the routing table only those routes that were learned from BGP routing devices.

#### ***Applying Policies to Routes Being Exported from the Routing Table into BGP***

To apply policy to routes being exported from the routing table into BGP, include the **export** statement, listing the names of one or more policies to be evaluated:

```
export [ policy-names ];
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

If you specify more than one policy, they are evaluated in the order specified, from first to last, and the first matching filter is applied to the route. If no routes match the filters, the routing table exports into BGP only the routes that it learned from BGP.

#### ***Setting BGP to Advertise Inactive Routes***

By default, BGP stores the route information it receives from update messages in the Junos OS routing table, and the routing table exports only active routes into BGP, which BGP then advertises to its peers. To have the routing table export to BGP the best route learned by BGP even if Junos OS did not select it to be an active route, include the **advertise-inactive** statement:

```
advertise-inactive;
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

#### ***Configuring BGP to Advertise the Best External Route to Internal Peers***

In general, deployed BGP implementations do not advertise the external route with the highest local preference value to internal peers unless it is the best route. Although this



behavior was required by an earlier version of the BGP version 4 specification, RFC 1771, it was typically not followed in order to minimize the amount of advertised information and to prevent routing loops. However, there are scenarios in which advertising the best external route is beneficial, in particular, situations that can result in IBGP route oscillation.

In Junos OS Release 9.3 and later, you can configure BGP to advertise the best external route into an internal BGP (IBGP) mesh group, a route reflector cluster, or an autonomous system (AS) confederation, even when the best route is an internal route.



**NOTE:** In order to configure the `advertise-external` statement on a route reflector, you must disable intracluster reflection with the `no-client-reflect` statement.

When a routing device is configured as a route reflector for a cluster, a route advertised by the route reflector is considered internal if it is received from an internal peer with the same cluster identifier or if both peers have no cluster identifier configured. A route received from an internal peer that belongs to another cluster, that is, with a different cluster identifier, is considered external.

In a confederation, when advertising a route to a confederation border router, any route from a different confederation sub-AS is considered external.

You can also configure BGP to advertise the external route only if the route selection process reaches the point where the multiple exit discriminator (MED) metric is evaluated. As a result, an external route with an AS path worse (that is, longer) than that of the active path is not advertised.

Junos OS also provides support for configuring a BGP export policy that matches on the state of an advertised route. You can match on either active or inactive routes. For more information, see the Routing Policy Configuration Guide.

To configure BGP to advertise the best external path to internal peers, include the `advertise-external` statement:

```
advertise-external;
```



**NOTE:** The `advertise-external` statement is supported at both the group and neighbor level. If you configure the statement at the neighbor level, you must configure it for all neighbors in a group. Otherwise, the group is automatically split into different groups.

For a complete list of hierarchy levels at which you can configure this statement, see the statement summary section for this statement.

To configure BGP to advertise the best external path only if the route selection process reaches the point where the MED value is evaluated, include the `conditional` statement:

```
advertise-external {
  conditional;
```



```
}
```

For a complete list of hierarchy levels at which you can configure this statement, see the statement summary section for this statement.

### ***Configuring How Often BGP Exchanges Routes with the Routing Table***

BGP stores the route information it receives from update messages in the routing table, and the routing table exports active routes from the routing table into BGP. BGP then advertises the exported routes to its peers. By default, the exchange of route information between BGP and the routing table occurs immediately after the routes are received. This immediate exchange of route information might cause instabilities in the network reachability information. To guard against this, you can delay the time between when BGP and the routing table exchange route information.

To configure how often BGP and the routing table exchange route information, include the **out-delay** statement:

```
out-delay seconds;
```

By default, the routing table retains some of the route information learned from BGP. To have the routing table retain all or none of this information, include the **keep** statement:

```
keep (all | none);
```

For a list of hierarchy levels at which you can include these statements, see the statement summary sections for these statements.

The routing table can retain the route information learned from BGP in one of the following ways:

- Default (omit the **keep** statement)—Keep all route information that was learned from BGP, except for routes whose AS path is looped and whose loop includes the local AS.
- **keep all**—Keep all route information that was learned from BGP.
- **keep none**—Discard routes that were received from a peer and that were rejected by import policy or other sanity checking, such as AS path or next hop. When you configure **keep none** for the BGP session and the inbound policy changes, Junos OS forces readvertisement of the full set of routes advertised by the peer.

In an AS path healing situation, routes with looped paths theoretically could become usable during a soft reconfiguration when the AS path loop limit is changed. However, there is a significant memory usage difference between the default and **keep all**.

Consider the following scenarios:

- A peer readvertises routes back to the peer from which it learned them.

This can happen in the following cases:

- Another vendor's routing device advertises the routes back to the sending peer.
- The Junos OS peer's default behavior of not readvertising routes back to the sending peer is overridden by configuring **advertise-peer-as**.



- A provider edge (PE) routing device discards any VPN route that does not have any of the expected route targets.

When **keep all** is configured, the behavior of discarding routes received in the above scenarios is overridden.

### ***Disabling Suppression of Route Advertisements***

Junos OS does not advertise the routes learned from one EBGp peer back to the same external BGP (EBGP) peer. In addition, the software does not advertise those routes back to any EBGp peers that are in the same AS as the originating peer, regardless of the routing instance. You can modify this behavior by including the **advertise-peer-as** statement in the configuration. To disable the default advertisement suppression, include the **advertise-peer-as** statement:

**advertise-peer-as;**



**NOTE:** The route suppression default behavior is disabled if the **as-override** statement is included in the configuration.

If you include the **advertise-peer-as** statement in the configuration, BGP advertises the route regardless of this check.

To restore the default behavior, include the **no-advertise-peer-as** statement in the configuration:

**no-advertise-peer-as;**

If you include both the **as-override** and **no-advertise-peer-as** statements in the configuration, the **no-advertise-peer-as** statement is ignored. You can include these statements at multiple hierarchy levels.

For a list of hierarchy levels at which you can include these statements, see the statement summary section for these statements.

### **Example: Configuring BGP Prefix-Based Outbound Route Filtering**

This example shows how to configure a Juniper Networks router to accept route filters from remote peers and perform outbound route filtering using the received filters.

- [Requirements on page 2807](#)
- [Overview on page 2808](#)
- [Configuration on page 2808](#)
- [Verification on page 2810](#)

### ***Requirements***

Before you begin:

- Configure the router interfaces.
- Configure an interior gateway protocol (IGP).



### Overview

You can configure a BGP peer to accept route filters from remote peers and perform outbound route filtering using the received filters. By filtering out unwanted updates, the sending peer saves resources needed to generate and transmit updates, and the receiving peer saves resources needed to process updates. This feature can be useful, for example, in a virtual private network (VPN) in which subsets of customer edge (CE) devices are not capable of processing all the routes in the VPN. The CE devices can use prefix-based outbound route filtering to communicate to the provider edge (PE) routing device to transmit only a subset of routes, such as routes to the main data centers only.

The maximum number of prefix-based outbound route filters that a BGP peer can accept is 5000. If a remote peer sends more than 5000 outbound route filters to a peer address, the additional filters are discarded, and a system log message is generated.


You can configure interoperability for the routing device as a whole or for specific BGP groups or peers only.

### Topology

In the sample network, Device CE1 is a router from another vendor. The configuration shown in this example is on Juniper Networks Router PE1.

Figure 65 on page 2808 shows the sample network.

Figure 65: BGP Prefix-Based Outbound Route Filtering

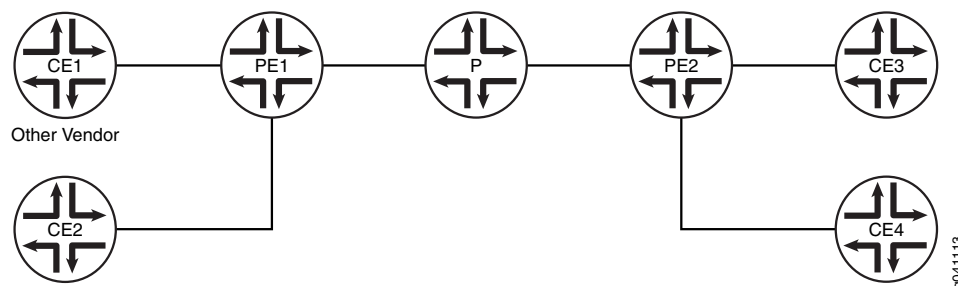

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
PE1 set protocols bgp group cisco-peers type external
    set protocols bgp group cisco-peers description "to CE1"
    set protocols bgp group cisco-peers local-address 192.168.165.58
    set protocols bgp group cisco-peers peer-as 35
    set protocols bgp group cisco-peers outbound-route-filter bgp-orf-cisco-mode
    set protocols bgp group cisco-peers outbound-route-filter prefix-based accept inet
    set protocols bgp group cisco-peers neighbor 192.168.165.56
    set routing-options autonomous-system 65500
```



**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Router PE1 to accept route filters from Device CE1 and perform outbound route filtering using the received filters:

1. Configure the local autonomous system.

```
[edit routing-options]
user@PE1# set autonomous-system 65500
```

2. Configure external peering with Device CE1.

```
[edit protocols bgp group cisco-peers]
user@PE1# set type external
user@PE1# set description "to CE1"
user@PE1# set local-address 192.168.165.58
user@PE1# set peer-as 35
user@PE1# set neighbor 192.168.165.56
```

3. Configure Router PE1 to accept IPv4 route filters from Device CE1 and perform outbound route filtering using the received filters.

```
[edit protocols bgp group cisco-peers]
user@PE1# set outbound-route-filter prefix-based accept inet
```

4. (Optional) Enable interoperability with routing devices that use the vendor-specific compatibility code of 130 for outbound route filters and the code type of 128.

The IANA standard code is 3, and the standard code type is 64.

```
[edit protocols bgp group cisco-peers]
user@PE1# set outbound-route-filter bgp-orf-cisco-mode
```

**Results** From configuration mode, confirm your configuration by entering the **show protocols** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@PE1# show protocols
group cisco-peers {
  type external;
  description "to CE1";
  local-address 192.168.165.58;
  peer-as 35;
  outbound-route-filter {
    bgp-orf-cisco-mode;
    prefix-based {
      accept {
        inet;
      }
    }
  }
  neighbor 192.168.165.56;
}

user@PE1# show routing-options
autonomous-system 65500;
```



If you are done configuring the device, enter **commit** from configuration mode.

### **Verification**

Confirm that the configuration is working properly.

- [Verifying the Outbound Route Filter on page 2810](#)
- [Verifying the BGP Neighbor Mode on page 2810](#)

### **Verifying the Outbound Route Filter**

**Purpose** Display information about the prefix-based outbound route filter received from Device CE1.

**Action** From operational mode, enter the [show bgp neighbor orf detail](#) command.

```
user@PE1> show bgp neighbor orf 192.168.165.56 detail
Peer: 192.168.165.56 Type: External
Group: cisco-peers

inet-unicast
Filter updates rcv:          4 Immediate:          0
Filter: prefix-based         receive
Updates rcv:                 4
Received filter entries:
seq 10 2.2.0.0/16 deny minlen 0 maxlen 0
seq 20 3.3.0.0/16 deny minlen 24 maxlen 0
seq 30 4.4.0.0/16 deny minlen 0 maxlen 28
seq 40 5.5.0.0/16 deny minlen 24 maxlen 28
```

### **Verifying the BGP Neighbor Mode**

**Purpose** Verify that the **bgp-orf-cisco-mode** setting is enabled for the peer by making sure that the **ORFCiscoMode** option is displayed in the **show bgp neighbor** command output.

**Action** From operational mode, enter the [show bgp neighbor](#) command.

```
user@PE1> show bgp neighbor
Peer: 192.168.165.56 AS 35          Local: 192.168.165.58 AS 65500
Type: External   State: Active    Flags: <>
Last State: Idle   Last Event: Start
Last Error: None
Export: [ adv_stat ]
Options: <Preference LocalAddress AddressFamily PeerAS Refresh>
Options: <ORF ORFCiscoMode>
Address families configured: inet-unicast
Local Address: 192.168.165.58 Holdtime: 90 Preference: 170
Number of flaps: 0
Trace options: detail open detail refresh
Trace file: /var/log/orf size 5242880 files 20
```

**Related Documentation**

- [Understanding External BGP Peering Sessions on page 2643](#)
- [BGP Configuration Overview](#)



## Example: Configuring EBGp Multihop

- [Understanding BGP Multihop on page 2811](#)
- [Example: Configuring EBGp Multihop Sessions on page 2811](#)

### Understanding BGP Multihop

When external BGP (EBGP) peers are not directly connected to each other, they must cross one or more non-BGP routers to reach each other. Configuring multihop EBGp enables the peers to pass through the other routers to form peer relationships and exchange update messages. This type of configuration is typically used when a Juniper Networks routing device needs to run EBGp with a third-party router that does not allow direct connection of the two EBGp peers. EBGp multihop enables a neighbor connection between two EBGp peers that do not have a direct connection.

### Example: Configuring EBGp Multihop Sessions

This example shows how to configure an external BGP (EBGP) peer that is more than one hop away from the local router. This type of session is called a *multihop* BGP session.

- [Requirements on page 2811](#)
- [Overview on page 2811](#)
- [Configuration on page 2812](#)
- [Verification on page 2818](#)

#### Requirements

No special configuration beyond device initialization is required before you configure this example.

#### Overview

The configuration to enable multihop EBGp sessions requires connectivity between the two EBGp peers. This example uses static routes to provide connectivity between the devices.

Unlike directly connected EBGp sessions in which physical address are typically used in the **neighbor** statements, you must use loopback interface addresses for multihop EBGp by specifying the loopback interface address of the indirectly connected peer. In this way, EBGp multihop is similar to internal BGP (IBGP).


Finally, you must add the **multihop** statement. Optionally, you can set a maximum time-to-live (TTL) value with the **tll** statement. The TTL is carried in the IP header of BGP packets. If you do not specify a TTL value, the system's default maximum TTL value is used. The default TTL value is 64 for multihop EBGp sessions. Another option is to retain the BGP next-hop value for route advertisements by including the **no-nexthop-change** statement.

[Figure 66 on page 2812](#) shows a typical EBGp multihop network.

Device C and Device E have an established EBGp session. Device D is not a BGP-enabled device. All of the devices have connectivity via static routes.



Figure 66: Typical Network with EBGP Multihop Sessions

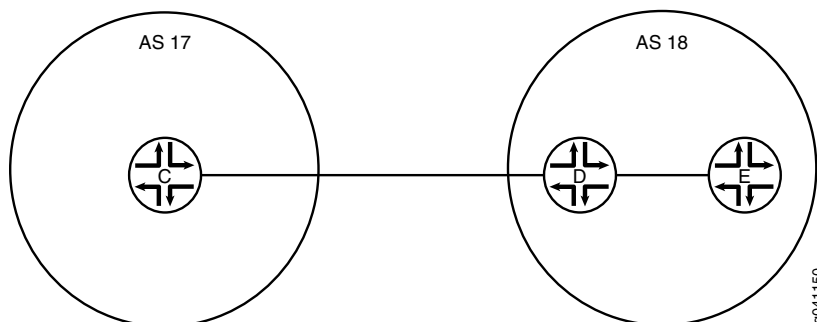**Configuration****CLI Quick Configuration**

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device C**

```
set interfaces fe-1/2/0 unit 9 description to-D
set interfaces fe-1/2/0 unit 9 family inet address 10.10.10.9/30
set interfaces lo0 unit 3 family inet address 192.168.40.4/32
set protocols bgp group external-peers type external
set protocols bgp group external-peers multihop ttl 2
set protocols bgp group external-peers local-address 192.168.40.4
set protocols bgp group external-peers export send-static
set protocols bgp group external-peers peer-as 18
set protocols bgp group external-peers neighbor 192.168.6.7
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 10.10.10.14/32 next-hop 10.10.10.10
set routing-options static route 192.168.6.7/32 next-hop 10.10.10.10
set routing-options router-id 192.168.40.4
set routing-options autonomous-system 17
```

**Device D**

```
set interfaces fe-1/2/0 unit 10 description to-C
set interfaces fe-1/2/0 unit 10 family inet address 10.10.10.10/30
set interfaces fe-1/2/1 unit 13 description to-E
set interfaces fe-1/2/1 unit 13 family inet address 10.10.10.13/30
set interfaces lo0 unit 4 family inet address 192.168.6.6/32
set routing-options static route 192.168.40.4/32 next-hop 10.10.10.9
set routing-options static route 192.168.6.7/32 next-hop 10.10.10.14
set routing-options router-id 192.168.6.6
```

**Device E**

```
set interfaces fe-1/2/0 unit 14 description to-D
set interfaces fe-1/2/0 unit 14 family inet address 10.10.10.14/30
set interfaces lo0 unit 5 family inet address 192.168.6.7/32
set protocols bgp group external-peers multihop ttl 2
set protocols bgp group external-peers local-address 192.168.6.7
set protocols bgp group external-peers export send-static
set protocols bgp group external-peers peer-as 17
set protocols bgp group external-peers neighbor 192.168.40.4
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
```



```

set routing-options static route 10.10.10.8/30 next-hop 10.10.10.13
set routing-options static route 192.168.40.4/32 next-hop 10.10.10.13
set routing-options router-id 192.168.6.7
set routing-options autonomous-system 18

```

### Device C

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure Device C:

1. Configure the interface to the directly connected device (to-D), and configure the loopback interface.

```

[edit interfaces fe-1/2/0 unit 9]
user@C# set description to-D
user@C# set family inet address 10.10.10.9/30

```

```

[edit interfaces lo0 unit 3]
user@C# set family inet address 192.168.40.4/32

```

2. Configure an EBGp session with Device E.

The **neighbor** statement points to the loopback interface on Device E.

```

[edit protocols bgp group external-peers]
user@C# set type external
user@C# set local-address 192.168.40.4
user@C# set export send-static
user@C# set peer-as 18
user@C# set neighbor 192.168.6.7

```

3. Configure the multihop statement to enable Device C and Device E to become EBGp peers.

Because the peers are two hops away from each other, the example uses the **ttl 2** statement.

```

[edit protocols bgp group external-peers]
user@C# set multihop ttl 2

```

4. Configure connectivity to Device E, using static routes.

You must configure a route to both the loopback interface address and to the address on the physical interface.

```

[edit routing-options]
user@C# set static route 10.10.10.14/32 next-hop 10.10.10.10
user@C# set static route 192.168.6.7/32 next-hop 10.10.10.10

```

5. Configure the local router ID and the autonomous system (AS) number.

```

[edit routing-options]
user@C# set router-id 192.168.40.4
user@C# set autonomous-system 17

```

6. Configure a policy that accepts direct routes.



Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-static term 1]
user@C# set from protocol static
user@C# set then accept
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@C# show interfaces
fe-1/2/0 {
  unit 9 {
    description to-D;
    family inet {
      address 10.10.10.9/30;
    }
  }
}
lo0 {
  unit 3 {
    family inet {
      address 192.168.40.4/32;
    }
  }
}

user@C# show protocols
bgp {
  group external-peers {
    type external;
    multihop {
      ttl 2;
    }
    local-address 192.168.40.4;
    export send-static;
    peer-as 18;
    neighbor 192.168.6.7;
  }
}

user@C# show policy-options
policy-statement send-static {
  term 1 {
    from protocol static;
    then accept;
  }
}

user@C# show routing-options
static {
  route 10.10.10.14/32 next-hop 10.10.10.10;
  route 192.168.6.7/32 next-hop 10.10.10.10;
}
```



```
router-id 192.168.40.4;
autonomous-system 17;
```

If you are done configuring the device, enter **commit** from configuration mode. Repeat these steps for all BFD sessions in the topology.

### *Configuring Device D*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device D:

1. Set the CLI to Device D.

```
user@host> set cli logical-system D
```

2. Configure the interfaces to the directly connected devices, and configure a loopback interface.

```
[edit interfaces fe-1/2/0 unit 10]
user@D# set description to-C
user@D# set family inet address 10.10.10.10/30
```

```
[edit interfaces fe-1/2/1 unit 13]
user@D# set description to-E
user@D# set family inet address 10.10.10.13/30
```

```
[edit interfaces lo0 unit 4]
user@D# set family inet address 192.168.6.6/32
```

3. Configure connectivity to the other devices using static routes to the loopback interface addresses.

On Device D, you do not need static routes to the physical addresses because Device D is directly connected to Device C and Device E.

```
[edit routing-options]
user@D# set static route 192.168.40.4/32 next-hop 10.10.10.9
user@D# set static route 192.168.6.7/32 next-hop 10.10.10.14
```

4. Configure the local router ID.

```
[edit routing-options]
user@D# set router-id 192.168.6.6
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@D# show interfaces
fe-1/2/0 {
  unit 10 {
    description to-C;
    family inet {
      address 10.10.10.10/30;
```



```
    }  
  }  
}  
fe-1/2/1 {  
  unit 13 {  
    description to-E;  
    family inet {  
      address 10.10.10.13/30;  
    }  
  }  
}  
lo0 {  
  unit 4 {  
    family inet {  
      address 192.168.6.6/32;  
    }  
  }  
}  
  
user@D# show protocols  
  
user@D# show routing-options  
static {  
  route 192.168.40.4/32 next-hop 10.10.10.9;  
  route 192.168.6.7/32 next-hop 10.10.10.14;  
}  
router-id 192.168.6.6;
```

If you are done configuring the device, enter **commit** from configuration mode.  
Repeat these steps for all BFD sessions in the topology.

### *Configuring Device E*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure Device E:

1. Set the CLI to Device E.
2. Configure the interface to the directly connected device (to-D), and configure the loopback interface.

```
[edit interfaces fe-1/2/0 unit 14]  
user@E# set description to-D  
user@E# set family inet address 10.10.10.14/30
```

```
[edit interfaces lo0 unit 5]  
user@E# set family inet address 192.168.6.7/32
```

3. Configure an EBGP session with Device E.

The **neighbor** statement points to the loopback interface on Device C.

```
[edit protocols bgp group external-peers]
```



```

user@E# set local-address 192.168.6.7
user@E# set export send-static
user@E# set peer-as 17
user@E# set neighbor 192.168.40.4

```

4. Configure the **multihop** statement to enable Device C and Device E to become EBGP peers.

Because the peers are two hops away from each other, the example uses the **ttl 2** statement.

```

[edit protocols bgp group external-peers]
user@E# set multihop ttl 2

```

5. Configure connectivity to Device E, using static routes.

You must configure a route to both the loopback interface address and to the address on the physical interface.

```

[edit routing-options]
user@E# set static route 10.10.10.8/30 next-hop 10.10.10.13
user@E# set static route 192.168.40.4/32 next-hop 10.10.10.13

```

6. Configure the local router ID and the autonomous system (AS) number.

```

[edit routing-options]
user@E# set router-id 192.168.6.7
user@E# set autonomous-system 18

```

7. Configure a policy that accepts direct routes.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```

[edit policy-options policy-statement send-static term 1]
user@E# set from protocol static
user@E# set then accept

```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@E# show interfaces
fe-1/2/0 {
  unit 14 {
    description to-D;
    family inet {
      address 10.10.10.14/30;
    }
  }
}
lo0 {
  unit 5 {
    family inet {
      address 192.168.6.7/32;
    }
  }
}

```



```
}
user@E# show protocols
bgp {
  group external-peers {
    multihop {
      ttl 2;
    }
    local-address 192.168.6.7;
    export send-static;
    peer-as 17;
    neighbor 192.168.40.4;
  }
}

user@E# show policy-options
policy-statement send-static {
  term 1 {
    from protocol static;
    then accept;
  }
}

user@E# show routing-options
static {
  route 10.10.10.8/30 next-hop 10.10.10.13;
  route 192.168.40.4/32 next-hop 10.10.10.13;
}
router-id 192.168.6.7;
autonomous-system 18;
```

If you are done configuring the device, enter **commit** from configuration mode.

### **Verification**

Confirm that the configuration is working properly.

- [Verifying Connectivity on page 2818](#)
- [Verifying That BGP Sessions Are Established on page 2819](#)
- [Viewing Advertised Routes on page 2819](#)

### **Verifying Connectivity**

**Purpose** Make sure that Device C can ping Device E, specifying the loopback interface address as the source of the ping request.

The loopback interface address is the source address that BGP will use.

**Action** From operational mode, enter the **ping 10.10.10.14 source 192.168.40.4** command from Device C, and enter the **ping 10.10.10.9 source 192.168.6.7** command from Device E.

```
user@C> ping 10.10.10.14 source 192.168.40.4
```

```
PING 10.10.10.14 (10.10.10.14): 56 data bytes
64 bytes from 10.10.10.14: icmp_seq=0 ttl=63 time=1.262 ms
64 bytes from 10.10.10.14: icmp_seq=1 ttl=63 time=1.202 ms
^C
```



```

--- 10.10.10.14 ping statistics ---
2 packets transmitted, 2 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.202/1.232/1.262/0.030 ms

```

```
user@E> ping 10.10.10.9 source 192.168.6.7
```

```

PING 10.10.10.9 (10.10.10.9): 56 data bytes
64 bytes from 10.10.10.9: icmp_seq=0 ttl=63 time=1.255 ms
64 bytes from 10.10.10.9: icmp_seq=1 ttl=63 time=1.158 ms
^C
--- 10.10.10.9 ping statistics ---
2 packets transmitted, 2 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.158/1.206/1.255/0.049 ms

```

**Meaning** The static routes are working if the pings work.

### *Verifying That BGP Sessions Are Established*

**Purpose** Verify that the BGP sessions are up.

**Action** From operational mode, enter the `show bgp summary` command.

```
user@C> show bgp summary
```

```

Groups: 1 Peers: 1 Down peers: 0
Table      Tot Paths  Act Paths Suppressed  History  Damp State  Pending
inet.0          2          0          0          0          0          0          0
Peer        AS      InPkt    OutPkt    OutQ   Flaps  Last Up/Dwn
State|#Active/Received/Accepted/Damped...
192.168.6.7      18      147      147        0        1    1:04:27
0/2/2/0          0/0/0/0

```

```
user@E> show bgp summary
```

```

Groups: 1 Peers: 1 Down peers: 0
Table      Tot Paths  Act Paths Suppressed  History  Damp State  Pending
inet.0          2          0          0          0          0          0          0
Peer        AS      InPkt    OutPkt    OutQ   Flaps  Last Up/Dwn
State|#Active/Received/Accepted/Damped...
192.168.40.4     17     202     202        0        1    1:02:18
0/2/2/0          0/0/0/0

```

**Meaning** The output shows that both devices have one peer each. No peers are down.

### *Viewing Advertised Routes*

**Purpose** Check to make sure that routes are being advertised by BGP.

**Action** From operational mode, enter the `show route advertising-protocol bgp neighbor` command.

```
user@C> show route advertising-protocol bgp 192.168.6.7
```

```

inet.0: 5 destinations, 7 routes (5 active, 0 holddown, 0 hidden)
  Prefix                Nexthop          MED    Lclpref  AS path
* 10.10.10.14/32        Self              0
* 192.168.6.7/32        Self              0

```



```
user@E> show route advertising-protocol bgp 192.168.40.4
```

```
inet.0: 5 destinations, 7 routes (5 active, 0 holddown, 0 hidden)
  Prefix                Nexthop          MED      Lclpref   AS path
* 10.10.10.8/30         Self              0         0         I
* 192.168.40.4/32       Self              0         0         I
```

**Meaning** The **send-static** routing policy is exporting the static routes from the routing table into BGP. BGP is advertising these routes between the peers because the BGP peer session is established.

**Related Documentation**

- [Examples: Configuring External BGP Peering on page 2643](#)
- [BGP Configuration Overview](#)

## Example: Configuring BGP Route Preference (Administrative Distance)

- [Understanding Route Preference Values on page 2820](#)
- [Example: Configuring the Preference Value for BGP Routes on page 2821](#)

### Understanding Route Preference Values

The Junos OS routing protocol process assigns a default preference value (also known as an *administrative distance*) to each route that the routing table receives. The default value depends on the source of the route. The preference value is a value from 0 through 4,294,967,295 ( $2^{32} - 1$ ), with a lower value indicating a more preferred route. [Table 203 on page 2820](#) lists the default preference values.

**Table 203: Default Route Preference Values**

How Route Is Learned	Default Preference	Statement to Modify Default Preference
Directly connected network	0	—
System routes	4	—
Static and Static LSPs	5	static
RSVP-signaled LSPs	7	RSVP <b>preference</b> as described in the Junos OS MPLS Applications Configuration Guide
LDP-signaled LSPs	9	LDP <b>preference</b> , as described in the Junos OS MPLS Applications Configuration Guide
OSPF internal route	10	OSPF <b>preference</b>
IS-IS Level 1 internal route	15	IS-IS <b>preference</b>
IS-IS Level 2 internal route	18	IS-IS <b>preference</b>
Redirects	30	—



Table 203: Default Route Preference Values (*continued*)

How Route Is Learned	Default Preference	Statement to Modify Default Preference
Kernel	40	–
SNMP	50	–
Router discovery	55	–
RIP	100	RIP <a href="#">preference</a>
RIPng	100	RIPng preference
PIM	105	Multicast Protocols Configuration Guide
DVMRP	110	Multicast Protocols Configuration Guide
Aggregate	130	<a href="#">aggregate</a>
OSPF AS external routes	150	OSPF <a href="#">external-preference</a>
IS-IS Level 1 external route	160	IS-IS <a href="#">external-preference</a>
IS-IS Level 2 external route	165	IS-IS <a href="#">external-preference</a>
BGP	170	BGP <a href="#">preference</a> , <a href="#">export</a> , <a href="#">import</a>
MSDP	175	Multicast Protocols Configuration Guide

In general, the narrower the scope of the statement, the higher precedence its preference value is given, but the smaller the set of routes it affects. To modify the default preference value for routes learned by routing protocols, you generally apply routing policy when configuring the individual routing protocols. You also can modify some preferences with other configuration statements, which are indicated in the table.

#### Example: Configuring the Preference Value for BGP Routes

This example shows how to specify the preference for routes learned from BGP. Routing information can be learned from multiple sources. To break ties among equally specific routes learned from multiple sources, each source has a preference value. Routes that are learned through explicit administrative action, such as static routes, are preferred over routes learned from a routing protocol, such as BGP or OSPF. This concept is called *administrative distance* by some vendors.

- [Requirements on page 2822](#)
- [Overview on page 2822](#)
- [Configuration on page 2823](#)
- [Verification on page 2825](#)



### Requirements

No special configuration beyond device initialization is required before you configure this example.

### Overview

Routing information can be learned from multiple sources, such as through static configuration, BGP, or an interior gateway protocol (IGP). When Junos OS determines a route's preference to become the active route, it selects the route with the lowest preference as the active route and installs this route into the forwarding table. By default, the routing software assigns a preference of 170 to routes that originated from BGP. Of all the routing protocols, BGP has the highest default preference value, which means that routes learned by BGP are the least likely to become the active route.

Some vendors have a preference (distance) of 20 for external BGP (EBGP) and a distance of 200 for internal BGP (IBGP). Junos OS uses the same value (170) for both EBGP and IBGP. However, this difference between vendors has no operational impact because Junos OS always prefers EBGP routes over IBGP routes.

Another area in which vendors differ is in regard to IGP distance compared to BGP distance. For example, some vendors assign a distance of 110 to OSPF routes. This is higher than the EBGP distance of 20, and results in the selection of an EBGP route over an equivalent OSPF route. In the same scenario, Junos OS chooses the OSPF route, because of the default preference 10 for an internal OSPF route and 150 for an external OSPF route, which are both lower than the 170 preference assigned to all BGP routes.

In a multivendor environment, you might want to change the preference value for BGP routes so that Junos OS chooses an EBGP route instead of an OSPF route. To accomplish this goal, one option is to include the **preference** statement in the EBGP configuration. To modify the default BGP preference value, include the **preference** statement, specifying a value from 0 through 4,294,967,295 ( $2^{32} - 1$ ).



**TIP:** Another way to achieve multivendor compatibility is to include the **advertise-inactive** statement in the EBGP configuration. This causes the routing table to export to BGP the best route learned by BGP even if Junos OS did not select it to be an active route. By default, BGP stores the route information it receives from update messages in the Junos OS routing table, and the routing table exports only active routes into BGP, which BGP then advertises to its peers. The **advertise-inactive** statement causes Junos OS to advertise the best BGP route that is inactive because of IGP preference. When you use the **advertise-inactive** statement, the Junos OS device uses the OSPF route for forwarding, and the other vendor's device uses the EBGP route for forwarding. However, from the perspective of an EBGP peer in a neighboring AS, both vendors' devices appear to behave the same way.

### Topology

In the sample network, Device R1 and Device R2 have EBGP routes to each other and also OSPF routes to each other.




This example shows the routing tables in the following cases:

- Accept the default preference values of 170 for BGP and 10 for OSPF.
- Change the BGP preference to 8.

Figure 67 on page 2823 shows the sample network.

**Figure 67: BGP Preference Value Topology**

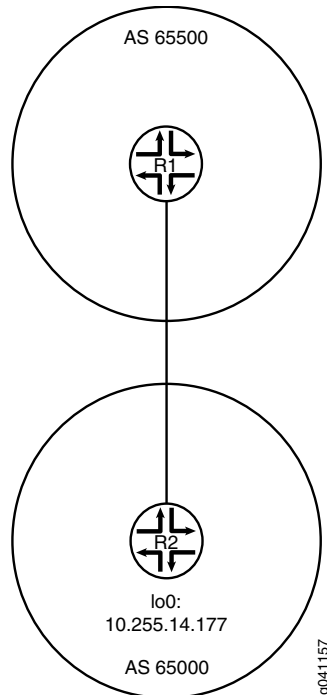

### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```

set interfaces fe-1/2/0 unit 4 family inet address 1.12.0.1/30
set interfaces lo0 unit 2 family inet address 10.255.71.24/32
set protocols bgp export send-direct
set protocols bgp group ext type external
set protocols bgp group ext preference 8
set protocols bgp group ext peer-as 65000
set protocols bgp group ext neighbor 1.12.0.2
set protocols ospf area 0.0.0.0 interface fe-1/2/0.4
set protocols ospf area 0.0.0.0 interface 10.255.71.24
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 65500

```

**Device R2**

```

set interfaces fe-1/2/0 unit 6 family inet address 1.12.0.2/30
set interfaces lo0 unit 3 family inet address 10.255.14.177/32

```



```
set protocols bgp export send-direct
set protocols bgp group ext type external
set protocols bgp group ext peer-as 65500
set protocols bgp group ext neighbor 1.12.0.1
set protocols ospf area 0.0.0.0 interface fe-1/2/0.6
set protocols ospf area 0.0.0.0 interface 10.255.14.177
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 65000
```

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure Device R1:

1. Configure the interfaces.

```
[edit interfaces]
user@R1# set fe-1/2/0 unit 4 family inet address 1.12.0.1/30
user@R1# set lo0 unit 2 family inet address 10.255.71.24/32
```

2. Configure the local autonomous system.

```
[edit routing-options]
user@R1# set autonomous-system 65500
```

3. Configure the external peering with Device R2.

```
[edit protocols bgp]
user@R1# set export send-direct
user@R1# set group ext type external
user@R1# set group ext preference 8
user@R1# set group ext peer-as 65000
user@R1# set group ext neighbor 1.12.0.2
```

4. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R1# set interface fe-1/2/0.4
user@R1# set interface 10.255.71.24
```

5. Configure the routing policy.

```
[edit policy-options policy-statement send-direct term 1]
user@R1# set from protocol direct
user@R1# set then accept
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 4 {
    family inet {
      address 1.12.0.1/30;
```



```

    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 10.255.71.24/32;
    }
  }
}

user@R1# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}

user@R1# show protocols
protocols {
  bgp {
    export send-direct;
    group ext {
      type external;
      preference 8;
      peer-as 65000;
      neighbor 1.12.0.2;
    }
  }
  ospf {
    area 0.0.0.0 {
      interface fe-1/2/0.4;
      interface 10.255.71.24;
    }
  }
}

user@R1# show routing-options
autonomous-system 65500;

```

If you are done configuring the device, enter **commit** from configuration mode. Repeat these steps on Device R2.

### **Verification**

Confirm that the configuration is working properly.

### **Verifying the Preference**

**Purpose** Make sure that the routing tables on Device R1 and Device R2 reflect the fact that Device R1 is using the configured EBGp preference of 8, and Device R2 is using the default EBGp preference of 170.

**Action** From operational mode, enter the **show route** command.

```
user@R1> show route
```



```
inet.0: 5 destinations, 7 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
1.12.0.0/30      *[Direct/0] 3d 07:03:01
                  > via fe-1/2/0.4
                  [BGP/8] 01:04:49, localpref 100
                  AS path: 65000 I
                  > to 1.12.0.2 via fe-1/2/0.4
1.12.0.1/32      *[Local/0] 3d 07:03:01
                  Local via fe-1/2/0.4
10.255.14.177/32 *[BGP/8] 01:04:49, localpref 100
                  AS path: 65000 I
                  > to 1.12.0.2 via fe-1/2/0.4
                  [OSPF/10] 3d 07:02:16, metric 1
                  > to 1.12.0.2 via fe-1/2/0.4
10.255.71.24/32  *[Direct/0] 3d 07:03:01
                  > via lo0.2
224.0.0.5/32     *[OSPF/10] 5d 03:42:16, metric 1
                  MultiRecv
```

```
user@R2> show route
```

```
inet.0: 5 destinations, 7 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
1.12.0.0/30      *[Direct/0] 3d 07:03:30
                  > via fe-1/2/0.6
                  [BGP/170] 00:45:36, localpref 100
                  AS path: 65500 I
                  > to 1.12.0.1 via fe-1/2/0.6
1.12.0.2/32      *[Local/0] 3d 07:03:30
                  Local via fe-1/2/0.6
10.255.14.177/32 *[Direct/0] 3d 07:03:30
                  > via lo0.3
10.255.71.24/32  *[OSPF/10] 3d 07:02:45, metric 1
                  > to 1.12.0.1 via fe-1/2/0.6
                  [BGP/170] 00:45:36, localpref 100
                  AS path: 65500 I
                  > to 1.12.0.1 via fe-1/2/0.6
224.0.0.5/32     *[OSPF/10] 5d 03:42:45, metric 1
                  MultiRecv
```

**Meaning** The output shows that on Device R1, the active path to Device R2's loopback interface (10.255.14.177/32) is a BGP route. The output also shows that on Device R2, the active path to Device R1's loopback interface (10.255.71.24/32) is an OSPF route.

- Related Documentation**
- [Route Preferences Overview](#)
  - [Understanding External BGP Peering Sessions on page 2643](#)
  - [BGP Configuration Overview](#)

## Example: Configuring BGP Path Selection

- [Understanding BGP Path Selection on page 2827](#)
- [Example: Ignoring the AS Path Attribute When Selecting the Best Path on page 2830](#)



## Understanding BGP Path Selection

For each prefix in the routing table, the routing protocol process selects a single best path. After the best path is selected, the route is installed in the routing table. The best path becomes the active route if the same prefix is not learned by a protocol with a lower (more preferred) global preference value, also known as the administrative distance. The algorithm for determining the active route is as follows:

1. Verify that the next hop can be resolved.
2. Choose the path with the lowest preference value (routing protocol process preference).

Routes that are not eligible to be used for forwarding (for example, because they were rejected by routing policy or because a next hop is inaccessible) have a preference of -1 and are never chosen.

3. Prefer the path with higher local preference.

For non-BGP paths, choose the path with the lowest **preference2** value.

4. If the accumulated interior gateway protocol (AIGP) attribute is enabled, prefer the path with the lower AIGP attribute.
5. Prefer the path with the shortest autonomous system (AS) path value (skipped if the **as-path-ignore** statement is configured).

A confederation segment (sequence or set) has a path length of 0. An AS set has a path length of 1.

6. Prefer the route with the lower origin code.

Routes learned from an IGP have a lower origin code than those learned from an exterior gateway protocol (EGP), and both have lower origin codes than incomplete routes (routes whose origin is unknown).

7. Prefer the path with the lowest multiple exit discriminator (MED) metric.

Depending on whether nondeterministic routing table path selection behavior is configured, there are two possible cases:

- If nondeterministic routing table path selection behavior is not configured (that is, if the **path-selection cisco-nondeterministic** statement is not included in the BGP configuration), for paths with the same neighboring AS numbers at the front of the AS path, prefer the path with the lowest MED metric. To always compare MEDs whether or not the peer ASs of the compared routes are the same, include the **path-selection always-compare-med** statement.
- If nondeterministic routing table path selection behavior is configured (that is, the **path-selection cisco-nondeterministic** statement is included in the BGP configuration), prefer the path with the lowest MED metric.

Confederations are not considered when determining neighboring ASs. A missing MED metric is treated as if a MED were present but zero.





**NOTE:** MED comparison works for single path selection within an AS (when the route does not include an AS path), though this usage is uncommon.

By default, only the MEDs of routes that have the same peer autonomous systems (ASs) are compared. You can configure routing table path selection options to obtain different behaviors.

8. Prefer strictly internal paths, which include IGP routes and locally generated routes (static, direct, local, and so forth).
9. Prefer strictly external BGP (EBGP) paths over external paths learned through internal BGP (IBGP) sessions.
10. Prefer the path whose next hop is resolved through the IGP route with the lowest metric.



**NOTE:** A path is considered a BGP equal-cost path (and will be used for forwarding) if a tie-break is performed after the previous step. All paths with the same neighboring AS, learned by a multipath-enabled BGP neighbor, are considered.

BGP multipath does not apply to paths that share the same MED-plus-IGP cost yet differ in IGP cost. Multipath path selection is based on the IGP cost metric, even if two paths have the same MED-plus-IGP cost.

11. If both paths are external, prefer the currently active path to minimize route-flapping. This rule is not used if any one of the following conditions is true:
  - **path-selection external-router-id** is configured.
  - Both peers have the same router ID.
  - Either peer is a confederation peer.
  - Neither path is the current active path.
12. Prefer a primary route over a secondary route. A primary route is one that belongs to the routing table. A secondary route is one that is added to the routing table through an export policy.
13. Prefer the path from the peer with the lowest router ID. For any path with an originator ID attribute, substitute the originator ID for the router ID during router ID comparison.
14. Prefer the path with the shortest cluster list length. The length is 0 for no list.
15. Prefer the path from the peer with the lowest peer IP address.

### ***Routing Table Path Selection***

The third step of the algorithm, by default, evaluates the length of the AS path and determines the active path. You can configure an option that enables Junos OS to skip this third step of the algorithm by including the **as-path-ignore** option.





**NOTE:** The `as-path-ignore` option is not supported for routing instances.

To configure routing table path selection behavior, include the **path-selection** statement:

```
path-selection {
  (always-compare-med | cisco-non-deterministic | external-router-id);
  as-path-ignore;
  med-plus-igp {
    igp-multiplier number;
    med-multiplier number;
  }
}
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

Routing table path selection can be configured in one of the following ways:

- Emulate the Cisco IOS default behavior (**cisco-non-deterministic**). This mode evaluates routes in the order that they are received and does not group them according to their neighboring AS. With **cisco-non-deterministic** mode, the active path is always first. All inactive, but eligible, paths follow the active path and are maintained in the order in which they were received, with the most recent path first. Ineligible paths remain at the end of the list.

As an example, suppose you have three path advertisements for the 192.168.1.0 /24 route:

- Path 1—learned through EBGp; AS Path of 65010; MED of 200
- Path 2—learned through IBGP; AS Path of 65020; MED of 150; IGP cost of 5
- Path 3—learned through IBGP; AS Path of 65010; MED of 100; IGP cost of 10

These advertisements are received in quick succession, within a second, in the order listed. Path 3 is received most recently, so the routing device compares it against path 2, the next most recent advertisement. The cost to the IBGP peer is better for path 2, so the routing device eliminates path 3 from contention. When comparing paths 1 and 2, the routing device prefers path 1 because it is received from an EBGp peer. This allows the routing device to install path 1 as the active path for the route.



**NOTE:** We do not recommend using this configuration option in your network. It is provided solely for interoperability to allow all routing devices in the network to make consistent route selections.

- Always comparing MEDs whether or not the peer ASs of the compared routes are the same (**always-compare-med**).
- Override the rule that If both paths are external, the currently active path is preferred (**external-router-id**). Continue with the next step (Step 12) in the path-selection process.



- Adding the IGP cost to the next-hop destination to the MED value before comparing MED values for path selection (**med-plus-igp**).

BGP multipath does not apply to paths that share the same MED-plus-IGP cost, yet differ in IGP cost. Multipath path selection is based on the IGP cost metric, even if two paths have the same MED-plus-IGP cost.

### ***Effects of Advertising Multiple Paths to a Destination***

BGP advertises only the active path, unless you configure BGP to advertise multiple paths to a destination.

Suppose a routing device has in its routing table four paths to a destination and is configured to advertise up to three paths (**add-path send path-count 3**). The three paths are chosen based on path selection criteria. That is, the three best paths are chosen in path-selection order. The best path is the active path. This path is removed from consideration and a new best path is chosen. This process is repeated until the specified number of paths is reached.

### **Example: Ignoring the AS Path Attribute When Selecting the Best Path**

---

If multiple BGP routes to the same destination exist, BGP selects the best path based on the route attributes of the paths. One of the route attributes that affects the best-path decision is the length of the AS paths of each route. Routes with shorter AS paths are preferred over those with longer AS paths. Although not typically practical, some scenarios might require that the AS path length be ignored in the route selection process. This example shows how to configure a routing device to ignore the AS path attribute.

- [Requirements on page 2830](#)
- [Overview on page 2830](#)
- [Configuration on page 2832](#)
- [Verification on page 2837](#)

#### **Requirements**

No special configuration beyond device initialization is required before you configure this example.

#### **Overview**

On externally connected routing devices, the purpose of skipping the AS path comparison might be to force an external BGP (EBGP) versus internal BGP (IBGP) decision to remove traffic from your network as soon as possible. On internally connected routing devices, you might want your IBGP-only routers to default to the local externally connected gateway. The local IBGP-only (internal) routers skip the AS path comparison and move down the decision tree to use the closest interior gateway protocol (IGP) gateway (lowest IGP metric). Doing this might be an effective way to force these routers to use a LAN connection instead of their WAN connection.



**CAUTION:** When you include the **as-path-ignore** statement on a routing device in your network, you might need to include it on all other BGP-enabled devices



in your network to prevent routing loops and convergence issues. This is especially true for IBGP path comparisons.

.....

In this example, Device R2 is learning about the loopback interface address on Device R4 (4.4.4.4/32) from Device R1 and Device R3. Device R1 is advertising 4.4.4.4/32 with an AS-path of 1 5 4, and Device R3 is advertising 4.4.4.4/32 with an AS-path of 3 4. Device R2 selects the path for 4.4.4.4/32 from Device R3 as the best path because the AS path is shorter than the AS path from Device R1.


This example modifies the BGP configuration on Device R2 so that the AS-path length is not used in the best-path selection.

Device R1 has a lower router ID (1.1.1.1) than Device R3 (1.1.1.1). If all other path selection criteria are equal (or, as in this case, ignored), the route learned from Device R1 is used. Because the AS-path attribute is being ignored, the best path is toward Device R1 because of its lower router ID value.

[Figure 68 on page 2832](#) shows the sample topology.



Figure 68: Topology for Ignoring the AS-Path Length

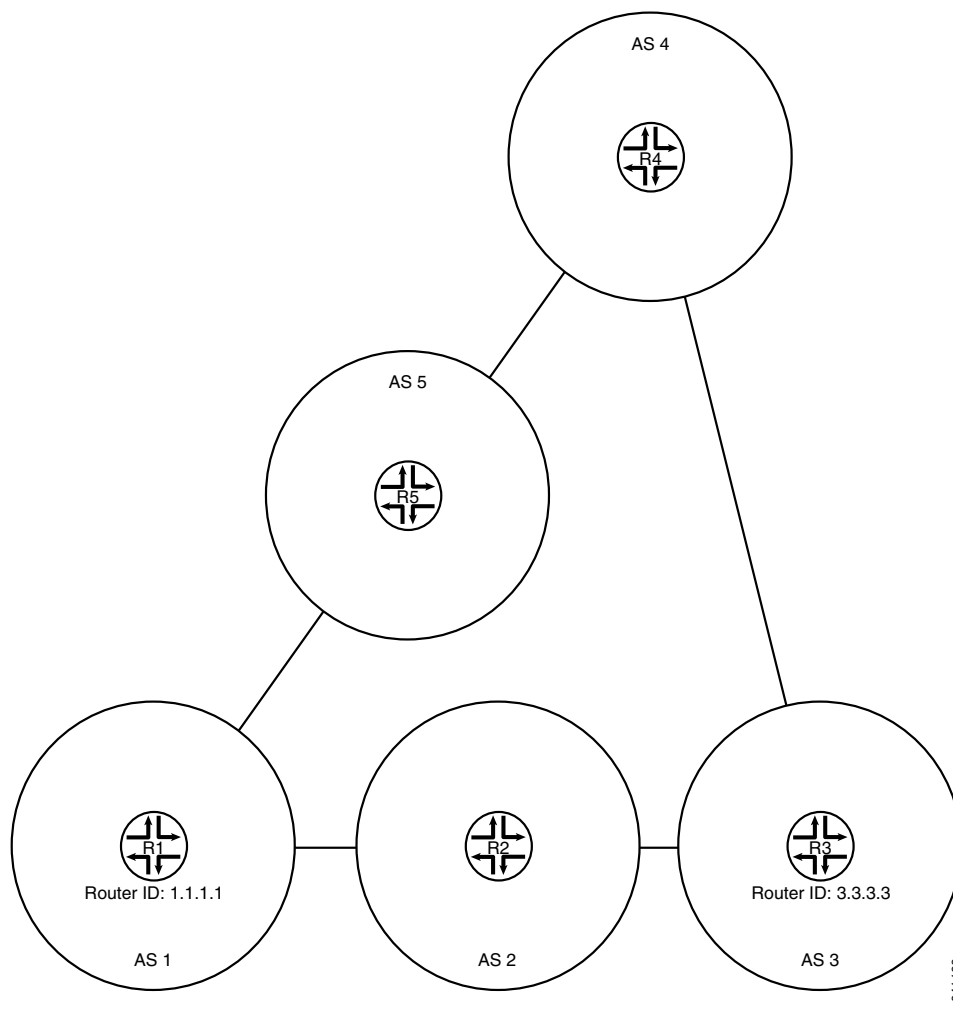**Configuration****CLI Quick Configuration**

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```

Device R1  set interfaces fe-1/2/0 unit 1 family inet address 192.168.10.1/24
            set interfaces fe-1/2/1 unit 10 family inet address 192.168.50.2/24
            set interfaces lo0 unit 1 family inet address 1.1.1.1/32
            set protocols bgp group ext type external
            set protocols bgp group ext export send-direct
            set protocols bgp group ext export send-static
            set protocols bgp group ext export send-local
            set protocols bgp group ext neighbor 192.168.10.2 peer-as 2
            set protocols bgp group ext neighbor 192.168.50.1 peer-as 5
            set policy-options policy-statement send-direct term 1 from protocol direct
            set policy-options policy-statement send-direct term 1 then accept
            set policy-options policy-statement send-local term 1 from protocol local
  
```



```

set policy-options policy-statement send-local term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 192.168.20.0/24 next-hop 192.168.10.2
set routing-options static route 192.168.30.0/24 next-hop 192.168.10.2
set routing-options static route 192.168.40.0/24 next-hop 192.168.50.1
set routing-options router-id 1.1.1.1
set routing-options autonomous-system 1

```

**Device R2**

```

set interfaces fe-1/2/0 unit 2 family inet address 192.168.10.2/24
set interfaces fe-1/2/1 unit 3 family inet address 192.168.20.2/24
set interfaces lo0 unit 2 family inet address 2.2.2.2/32
set protocols bgp path-selection as-path-ignore
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext export send-local
set protocols bgp group ext neighbor 192.168.10.1 peer-as 1
set protocols bgp group ext neighbor 192.168.20.1 peer-as 3
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-local term 1 from protocol local
set policy-options policy-statement send-local term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 192.168.50.0/24 next-hop 192.168.10.1
set routing-options static route 192.168.40.0/24 next-hop 192.168.10.1
set routing-options static route 192.168.30.0/24 next-hop 192.168.20.1
set routing-options router-id 2.2.2.2
set routing-options autonomous-system 2

```

**Device R3**

```

set interfaces fe-1/2/0 unit 4 family inet address 192.168.20.1/24
set interfaces fe-1/2/1 unit 5 family inet address 192.168.30.1/24
set interfaces lo0 unit 3 family inet address 1.1.1.1/32
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext export send-local
set protocols bgp group ext neighbor 192.168.20.2 peer-as 2
set protocols bgp group ext neighbor 192.168.30.2 peer-as 4
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-local term 1 from protocol local
set policy-options policy-statement send-local term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 192.168.10.0/24 next-hop 192.168.20.2
set routing-options static route 192.168.50.0/24 next-hop 192.168.20.2
set routing-options static route 192.168.40.0/24 next-hop 192.168.30.2
set routing-options router-id 3.3.3.3
set routing-options autonomous-system 3

```

**Device R4**

```

set interfaces fe-1/2/0 unit 6 family inet address 192.168.30.2/24
set interfaces fe-1/2/1 unit 7 family inet address 192.168.40.1/24
set interfaces lo0 unit 4 family inet address 4.4.4.4/32

```



```
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext export send-local
set protocols bgp group ext neighbor 192.168.30.1 peer-as 3
set protocols bgp group ext neighbor 192.168.40.2 peer-as 5
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-local term 1 from protocol local
set policy-options policy-statement send-local term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 192.168.10.0/24 next-hop 192.168.40.2
set routing-options static route 192.168.50.0/24 next-hop 192.168.40.2
set routing-options static route 192.168.40.0/24 next-hop 192.168.30.1
set routing-options router-id 4.4.4.4
set routing-options autonomous-system 4
```

**Device R5**

```
set interfaces fe-1/2/0 unit 8 family inet address 192.168.40.2/24
set interfaces fe-1/2/1 unit 9 family inet address 192.168.50.1/24
set interfaces lo0 unit 5 family inet address 5.5.5.5/32
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext export send-local
set protocols bgp group ext neighbor 192.168.40.1 peer-as 4
set protocols bgp group ext neighbor 192.168.50.2 peer-as 1
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-local term 1 from protocol local
set policy-options policy-statement send-local term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 192.168.10.0/24 next-hop 192.168.50.2
set routing-options static route 192.168.20.0/24 next-hop 192.168.50.2
set routing-options static route 192.168.30.0/24 next-hop 192.168.40.1
set routing-options router-id 5.5.5.5
set routing-options autonomous-system 5
```

### *Configuring Device R2*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure Device R2:

1. Configure the interfaces.  

```
[edit interfaces]
user@R2# set fe-1/2/0 unit 2 family inet address 192.168.10.2/24
user@R2# set fe-1/2/1 unit 3 family inet address 192.168.20.2/24
user@R2# set lo0 unit 2 family inet address 2.2.2.2/32
```
2. Configure EBGp.  

```
[edit protocols bgp group ext]
```



```

user@R2# set type external
user@R2# set export send-direct
user@R2# set export send-static
user@R2# set export send-local
user@R2# set neighbor 192.168.10.1 peer-as 1
user@R2# set neighbor 192.168.20.1 peer-as 3

```

3. Configure the autonomous system (AS) path attribute to be ignored in the Junos OS path selection algorithm.

```

[edit protocols bgp]
user@R2# set path-selection as-path-ignore

```

4. Configure the routing policy.

```

[edit policy-options]
user@R2# set policy-statement send-direct term 1 from protocol direct
user@R2# set policy-statement send-direct term 1 then accept
user@R2# set policy-statement send-local term 1 from protocol local
user@R2# set policy-statement send-local term 1 then accept
user@R2# set policy-statement send-static term 1 from protocol static
user@R2# set policy-statement send-static term 1 then accept

```

5. Configure some static routes.

```

[edit routing-options static]
user@R2# set route 192.168.50.0/24 next-hop 192.168.10.1
user@R2# set route 192.168.40.0/24 next-hop 192.168.10.1
user@R2# set route 192.168.30.0/24 next-hop 192.168.20.1

```

6. Configure the autonomous system (AS) number and the router ID.

```

[edit routing-options]
user@R2# set router-id 2.2.2.2
user@R2# set autonomous-system 2

```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R2# show interfaces
fe-1/2/0 {
  unit 2 {
    family inet {
      address 192.168.10.2/24;
    }
  }
}
fe-1/2/1 {
  unit 3 {
    family inet {
      address 192.168.20.2/24;
    }
  }
}
lo0 {
  unit 2 {

```



```
        family inet {
            address 2.2.2.2/32;
        }
    }
}

user@R2# show policy-options
policy-statement send-direct {
    term 1 {
        from protocol direct;
        then accept;
    }
}
policy-statement send-local {
    term 1 {
        from protocol local;
        then accept;
    }
}
policy-statement send-static {
    term 1 {
        from protocol static;
        then accept;
    }
}

user@R2# show protocols
bgp {
    path-selection as-path-ignore;
    group ext {
        type external;
        export [ send-direct send-static send-local ];
        neighbor 192.168.10.1 {
            peer-as 1;
        }
        neighbor 192.168.20.1 {
            peer-as 3;
        }
    }
}

user@R21# show routing-options
static {
    route 192.168.50.0/24 next-hop 192.168.10.1;
    route 192.168.40.0/24 next-hop 192.168.10.1;
    route 192.168.30.0/24 next-hop 192.168.20.1;
}
router-id 2.2.2.2;
autonomous-system 2;
```

If you are done configuring the device, enter **commit** from configuration mode. Repeat the configuration on the other devices in the network, changing the interface names and IP addresses, as needed.



**Verification**

Confirm that the configuration is working properly.

- [Checking the Neighbor Status on page 2837](#)

**Checking the Neighbor Status**

**Purpose** Make sure that from Device R2, the active path to get to AS 4 is through AS 1 and AS 5, not through AS 3.



**NOTE:** To verify the functionality of the `as-path-ignore` statement, you might need to run the `restart routing` command to force reevaluation of the active path. This is because for BGP, if both paths are external, the Junos OS behavior is to prefer the currently active path. This behavior helps to minimize route-flapping. Use caution when restarting the routing protocol process in a production network.

**Action** From operational mode, enter the `restart routing` command.

```
user@R2> restart routing
Routing protocols process started, pid 49396
```

From operational mode, enter the `show route 4.4.4.4 protocol bgp` command.

```
user@R2> show route 4.4.4.4 protocol bgp
inet.0: 12 destinations, 25 routes (12 active, 0 holddown, 4 hidden)
+ = Active Route, - = Last Active, * = Both

4.4.4.4/32          *[BGP/170] 00:00:12, localpref 100
                    AS path: 1 5 4 I
                    > to 192.168.10.1 via fe-1/2/0.2
                    [BGP/170] 00:00:08, localpref 100
                    AS path: 3 4 I
                    > to 192.168.20.1 via fe-1/2/1.3
```

**Meaning** The asterisk (\*) is next to the path learned from R1, meaning that this is the active path. The AS path for the active path is 1 5 4, which is longer than the AS path (3 4) for the nonactive path learned from Router R3.

**Related Documentation**

- [Understanding External BGP Peering Sessions on page 2643](#)
- BGP Configuration Overview

**Example: Removing Private AS Numbers**

- [Understanding Private AS Number Removal from AS Paths on page 2838](#)
- [Example: Removing Private AS Numbers from AS Paths on page 2839](#)



### Understanding Private AS Number Removal from AS Paths

---

By default, when BGP advertises AS paths to remote systems, it includes all AS numbers, including private AS numbers. You can configure the software so that it removes private AS numbers from AS paths. Doing this is useful when any of the following circumstances are true:

- A remote AS for which you provide connectivity is multihomed, but only to the local AS.
- The remote AS does not have an officially allocated AS number.
- It is not appropriate to make the remote AS a confederation member AS of the local AS.

Most companies acquire their own AS number. Some companies also use private AS numbers to connect to their public AS network. These companies might use a different private AS number for each region in which their company does business. In any implementation, announcing a private AS number to the Internet must be avoided. Service providers can use the **remove-private** statement to prevent advertising private AS numbers to the Internet.

In an enterprise scenario, suppose that you have multiple AS numbers in your company, some of which are private AS numbers, and one with a public AS number. The one with a public AS number has a direct connection to the service provider. In the AS that connects directly to the service provider, you can use the **remove-private** statement to filter out any private AS numbers in the advertisements that are sent to the service provider.



**CAUTION:** Changing configuration statements that affect BGP peers, such as enabling or disabling **remove-private** or renaming a BGP group, resets the BGP sessions. Changes that affect BGP peers should only be made when resetting a BGP session is acceptable.

---

The AS numbers are stripped from the AS path starting at the left end of the AS path (the end where AS paths have been most recently added). The routing device stops searching for private ASs when it finds the first nonprivate AS or a peer's private AS. If the AS path contains the AS number of the external BGP (EBGP) neighbor, BGP does not remove the private AS number.

---



**NOTE:** As of Junos OS 10.0R2 and later, if there is a need to send prefixes to an EBGP peer that has an AS number that matches an AS number in the AS path, consider using the **as-override** statement instead of the **remove-private** statement.

---

The operation takes place after any confederation member ASs have already been removed from the AS path, if applicable.



The software is preconfigured with knowledge of the set of AS numbers that is considered private, a range that is defined in the Internet Assigned Numbers Authority (IANA) assigned numbers document. The set of AS numbers reserved as private are in the range from 64,512 through 65,534, inclusive.

### Example: Removing Private AS Numbers from AS Paths

This example demonstrates the removal of a private AS number from the advertised AS path to avoid announcing the private AS number to the Internet.

- [Requirements on page 2839](#)
- [Overview on page 2839](#)
- [Configuration on page 2839](#)
- [Verification on page 2842](#)

#### Requirements


No special configuration beyond device initialization is required before you configure this example.

#### Overview

Service providers and enterprise networks use the **remove-private** statement to prevent advertising private AS numbers to the Internet. The **remove-private** statement works in the outbound direction. You configure the **remove-private** statement on a device that has a public AS number and that is connected to one or more devices that have private AS numbers. Generally, you would not configure this statement on a device that has a private AS number.

[Figure 69 on page 2839](#) shows the sample topology.

**Figure 69: Topology for Removing a Private AS from the Advertised AS Path**

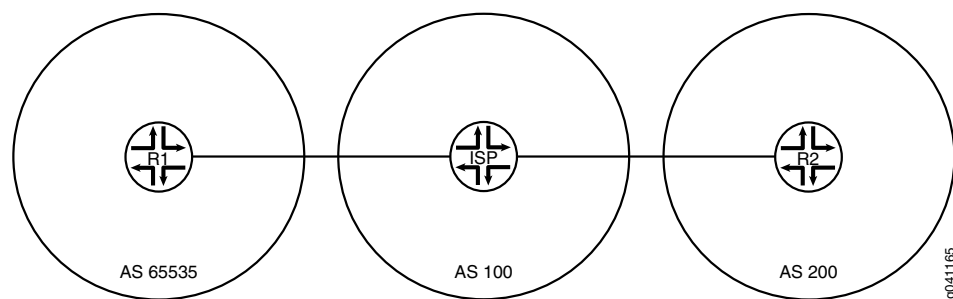

In this example, Device R1 is connected to its service provider using private AS number 65535. The example shows the **remove-private** statement configured on Device ISP to prevent Device R1's private AS number from being announced to Device R2. Device R2 sees only the AS number of the service provider.

#### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network



configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```
set interfaces fe-1/2/0 unit 1 family inet address 192.168.10.1/24
set interfaces lo0 unit 1 family inet address 10.10.10.1/32
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext peer-as 100
set protocols bgp group ext neighbor 192.168.10.10
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 192.168.20.0/24 next-hop 192.168.10.10
set routing-options autonomous-system 65535
```

**Device ISP**

```
set interfaces fe-1/2/0 unit 2 family inet address 192.168.10.10/24
set interfaces fe-1/2/1 unit 3 family inet address 192.168.20.20/24
set interfaces lo0 unit 2 family inet address 10.10.0.1/32
set protocols bgp group ext type external
set protocols bgp group ext neighbor 192.168.10.1 peer-as 65535
set protocols bgp group ext neighbor 192.168.20.1 remove-private
set protocols bgp group ext neighbor 192.168.20.1 peer-as 200
set routing-options autonomous-system 100
```

**Device R2**

```
set interfaces fe-1/2/0 unit 4 family inet address 192.168.20.1/24
set interfaces lo0 unit 3 family inet address 10.10.20.1/32
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext peer-as 100
set protocols bgp group ext neighbor 192.168.20.20
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 192.168.10.0/24 next-hop 192.168.20.20
set routing-options autonomous-system 200
```

#### *Device ISP*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device ISP:

1. Configure the interfaces.  

```
[edit interfaces]
user@ISP# set fe-1/2/0 unit 2 family inet address 192.168.10.10/24
user@ISP# set fe-1/2/1 unit 3 family inet address 192.168.20.20/24
user@ISP# set lo0 unit 2 family inet address 10.10.0.1/32
```
2. Configure EBGp.



```
[edit protocols bgp group ext]
user@ISP# set type external
user@ISP# set neighbor 192.168.10.1 peer-as 65535
user@ISP# set neighbor 192.168.20.1 peer-as 200
```

3. For the neighbor in autonomous system (AS) 200 (Device R2), remove private AS numbers from the advertised AS paths.

```
[edit protocols bgp group ext]
user@ISP# set neighbor 192.168.20.1 remove-private
```

4. Configure the AS number.

```
[edit routing-options]
user@ISP# set autonomous-system 100
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@ISP# show interfaces
fe-1/2/0 {
  unit 2 {
    family inet {
      address 192.168.10.10/24;
    }
  }
}
fe-1/2/1 {
  unit 3 {
    family inet {
      address 192.168.20.20/24;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 10.10.0.1/32;
    }
  }
}

user@ISP# show protocols
bgp {
  group ext {
    type external;
    neighbor 192.168.10.1 {
      peer-as 65535;
    }
    neighbor 192.168.20.1 {
      remove-private;
      peer-as 200;
    }
  }
}
```



```
user@ISP# show routing-options
autonomous-system 100;
```

If you are done configuring the device, enter **commit** from configuration mode. Repeat the configuration on Device R1 and Device R2, changing the interface names and IP address, as needed, and adding the routing policy configuration.

### **Verification**

Confirm that the configuration is working properly.

- [Checking the Neighbor Status on page 2842](#)
- [Checking the Routing Tables on page 2843](#)
- [Checking the AS Path When the remove-private Statement Is Deactivated on page 2843](#)

### **Checking the Neighbor Status**

**Purpose** Make sure that Device ISP has the **remove-private** setting enabled in its neighbor session with Device R2.

**Action** From operational mode, enter the **show bgp neighbor 192.168.20.1** command.

```
user@ISP> show bgp neighbor 192.168.20.1
Peer: 192.168.20.1+179 AS 200 Local: 192.168.20.20+60216 AS 100
  Type: External State: Established Flags: <ImportEval Sync>
  Last State: OpenConfirm Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference RemovePrivateAS PeerAS Refresh>
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.10.20.1 Local ID: 10.10.0.1 Active Holdtime: 90
  Keepalive Interval: 30 Peer index: 0
  BFD: disabled, down
  Local Interface: fe-1/2/1.3
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 200)
  Peer does not support Addpath
  Table inet.0 Bit: 10001
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes: 1
    Received prefixes: 3
    Accepted prefixes: 2
    Suppressed due to damping: 0
    Advertised prefixes: 1
  Last traffic (seconds): Received 10 Sent 16 Checked 55
  Input messages: Total 54 Updates 3 Refreshes 0 Octets 1091
  Output messages: Total 54 Updates 1 Refreshes 0 Octets 1118
  Output Queue[0]: 0
```



**Meaning** The **RemovePrivateAS** option shows that Device ISP has the expected setting.

### *Checking the Routing Tables*

**Purpose** Make sure that the devices have the expected routes and AS paths.

**Action** From operational mode, enter the **show route protocol bgp** command.

```

user@R1> show route protocol bgp
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.20.1/32      *[BGP/170] 00:28:57, localpref 100
                   AS path: 100 200 I
                   > to 192.168.10.10 via fe-1/2/0.1

user@ISP> show route protocol bgp

inet.0: 7 destinations, 11 routes (7 active, 0 holddown, 2 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.10.1/32      *[BGP/170] 00:29:40, localpref 100
                   AS path: 65535 I
                   > to 192.168.10.1 via fe-1/2/0.2
10.10.20.1/32      *[BGP/170] 00:29:36, localpref 100
                   AS path: 200 I
                   > to 192.168.20.1 via fe-1/2/1.3
192.168.10.0/24    [BGP/170] 00:29:40, localpref 100
                   AS path: 65535 I
                   > to 192.168.10.1 via fe-1/2/0.2
192.168.20.0/24    [BGP/170] 00:29:36, localpref 100
                   AS path: 200 I
                   > to 192.168.20.1 via fe-1/2/1.3

user@R2> show route protocol bgp
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.10.1/32      *[BGP/170] 00:29:53, localpref 100
                   AS path: 100 I
                   > to 192.168.20.20 via fe-1/2/0.4

```

**Meaning** Device ISP has the private AS number 65535 in its AS path to Device R1. However, Device ISP does not advertise this private AS number to Device R2. This is shown in the routing table of Device R2. Device R2's path to Device R1 contains only the AS number for Device ISP.

### *Checking the AS Path When the remove-private Statement Is Deactivated*

**Purpose** Verify that without the **remove-private** statement, the private AS number appears in Device R2's routing table.

**Action** From configuration mode on Device ISP, enter the **deactivate remove-private** command and then recheck the routing table on Device R2.

```
[protocols bgp group ext neighbor 192.168.20.1]
```



```
user@ISP# deactivate remove-private
user@ISP# commit

user@R2> show route protocol bgp
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.10.1/32      *[BGP/170] 00:00:54, localpref 100
                  AS path: 100 65535 I
                  > to 192.168.20.20 via fe-1/2/0.4
```

**Meaning** Private AS number 65535 appears in Device R2's AS path to Device R1.

- Related Documentation**
- [Understanding External BGP Peering Sessions on page 2643](#)
  - [BGP Configuration Overview](#)

---

## BGP BFD Configuration

- [Example: Configuring BFD for BGP on page 2844](#)
- [Example: Configuring BFD Authentication for BGP on page 2853](#)

### Example: Configuring BFD for BGP

- [Understanding BFD for BGP on page 2844](#)
- [Example: Configuring BFD on Internal BGP Peer Sessions on page 2845](#)

---

#### Understanding BFD for BGP

The Bidirectional Forwarding Detection (BFD) protocol is a simple hello mechanism that detects failures in a network. Hello packets are sent at a specified, regular interval. A neighbor failure is detected when the routing device stops receiving a reply after a specified interval. BFD works with a wide variety of network environments and topologies. The failure detection timers for BFD have shorter time limits than default failure detection mechanisms for BGP, so they provide faster detection.

The BFD failure detection timers are adaptive and can be adjusted to be faster or slower. The lower the BFD failure detection timer value, the faster the failure detection and vice versa. For example, the timers can adapt to a higher value if the adjacency fails (that is, the timer detects failures more slowly). Or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. A back-off algorithm increases the receive (Rx) interval by two if the local BFD instance is the reason for the session flap. The transmission (Tx) interval is increased by two if the remote BFD instance is the reason for the session flap. You can use the **clear bfd adaptation** command to return BFD interval timers to their configured values. The **clear bfd adaptation** command is hitless, meaning that the command does not affect traffic flow on the routing device.

In Junos OS Release 8.3 and later, BFD is supported on internal BGP (IBGP) and multihop external BGP (EBGP) sessions as well as on single-hop EBGP sessions. In Junos OS Release 9.1 through Junos OS Release 11.1, BFD supports IPv6 interfaces in static routes only. In Junos OS Release 11.2 and later, BFD supports IPv6 interfaces with BGP.



### Example: Configuring BFD on Internal BGP Peer Sessions

This example shows how to configure internal BGP (IBGP) peer sessions with the Bidirectional Forwarding Detection (BFD) protocol to detect failures in a network.

- [Requirements on page 2845](#)
- [Overview on page 2845](#)
- [Configuration on page 2846](#)
- [Verification on page 2850](#)

#### Requirements

No special configuration beyond device initialization is required before you configure this example.

#### Overview

The minimum configuration to enable BFD on IBGP sessions is to include the `bfd-liveness-detection minimum-interval` statement in the BGP configuration of all neighbors participating in the BFD session. The `minimum-interval` statement specifies the minimum transmit and receive intervals for failure detection. Specifically, this value represents the minimum interval after which the local routing device transmits hello packets as well as the minimum interval that the routing device expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a value from 1 through 255,000 milliseconds.

Optionally, you can specify the minimum transmit and receive intervals separately using the `transmit-interval minimum-interval` and `minimum-receive-interval` statements. For information about these and other optional BFD configuration statements, see [bfd-liveness-detection](#).



**NOTE:** BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD less than 100 ms for Routing Engine-based sessions and less than 10 ms for distributed BFD sessions can cause undesired BFD flapping.

Depending on your network environment, these additional recommendations might apply:


- For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of 300 ms for Routing Engine-based sessions and 100 ms for distributed BFD sessions.
- For very large-scale network deployments with a large number of BFD sessions, contact Juniper Networks customer support for more information.
- For BFD sessions to remain up during a Routing Engine switchover event when nonstop active routing (NSR) is configured, specify a minimum interval of 2500 ms for Routing Engine-based sessions. For distributed BFD sessions with NSR configured, the minimum interval recommendations are unchanged and depend only on your network deployment.



BFD is supported on the default routing instance (the main router), routing instances, and logical systems. This example shows BFD on logical systems.

Figure 70 on page 2846 shows a typical network with internal peer sessions.

**Figure 70: Typical Network with IBGP Sessions**

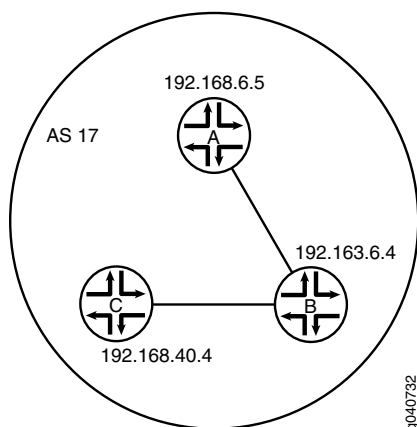

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

#### Device A

```
set logical-systems A interfaces lt-1/2/0 unit 1 description to-B
set logical-systems A interfaces lt-1/2/0 unit 1 encapsulation ethernet
set logical-systems A interfaces lt-1/2/0 unit 1 peer-unit 2
set logical-systems A interfaces lt-1/2/0 unit 1 family inet address 10.10.10.1/30
set logical-systems A interfaces lo0 unit 1 family inet address 192.168.6.5/32
set logical-systems A protocols bgp group internal-peers type internal
set logical-systems A protocols bgp group internal-peers traceoptions file bgp-bfd
set logical-systems A protocols bgp group internal-peers traceoptions flag bfd detail
set logical-systems A protocols bgp group internal-peers local-address 192.168.6.5
set logical-systems A protocols bgp group internal-peers export send-direct
set logical-systems A protocols bgp group internal-peers bfd-liveness-detection
    minimum-interval 1000
set logical-systems A protocols bgp group internal-peers neighbor 192.163.6.4
set logical-systems A protocols bgp group internal-peers neighbor 192.168.40.4
set logical-systems A protocols ospf area 0.0.0.0 interface lo0.1 passive
set logical-systems A protocols ospf area 0.0.0.0 interface lt-1/2/0.1
set logical-systems A policy-options policy-statement send-direct term 2 from protocol
    direct
set logical-systems A policy-options policy-statement send-direct term 2 then accept
set logical-systems A routing-options router-id 192.168.6.5
set logical-systems A routing-options autonomous-system 17
```

#### Device B

```
set logical-systems B interfaces lt-1/2/0 unit 2 description to-A
set logical-systems B interfaces lt-1/2/0 unit 2 encapsulation ethernet
set logical-systems B interfaces lt-1/2/0 unit 2 peer-unit 1
set logical-systems B interfaces lt-1/2/0 unit 2 family inet address 10.10.10.2/30
set logical-systems B interfaces lt-1/2/0 unit 5 description to-C
```



```

set logical-systems B interfaces lt-1/2/0 unit 5 encapsulation ethernet
set logical-systems B interfaces lt-1/2/0 unit 5 peer-unit 6
set logical-systems B interfaces lt-1/2/0 unit 5 family inet address 10.10.10.5/30
set logical-systems B interfaces lo0 unit 2 family inet address 192.163.6.4/32
set logical-systems B protocols bgp group internal-peers type internal
set logical-systems B protocols bgp group internal-peers local-address 192.163.6.4
set logical-systems B protocols bgp group internal-peers export send-direct
set logical-systems B protocols bgp group internal-peers bfd-liveness-detection
    minimum-interval 1000
set logical-systems B protocols bgp group internal-peers neighbor 192.168.40.4
set logical-systems B protocols bgp group internal-peers neighbor 192.168.6.5
set logical-systems B protocols ospf area 0.0.0.0 interface lo0.2 passive
set logical-systems B protocols ospf area 0.0.0.0 interface lt-1/2/0.2
set logical-systems B policy-options policy-statement send-direct term 2 from protocol
    direct
set logical-systems B policy-options policy-statement send-direct term 2 then accept
set logical-systems B routing-options router-id 192.163.6.4
set logical-systems B routing-options autonomous-system 17

```

**Device C**

```

set logical-systems C interfaces lt-1/2/0 unit 6 description to-B
set logical-systems C interfaces lt-1/2/0 unit 6 encapsulation ethernet
set logical-systems C interfaces lt-1/2/0 unit 6 peer-unit 5
set logical-systems C interfaces lt-1/2/0 unit 6 family inet address 10.10.10.6/30
set logical-systems C interfaces lo0 unit 3 family inet address 192.168.40.4/32
set logical-systems C protocols bgp group internal-peers type internal
set logical-systems C protocols bgp group internal-peers local-address 192.168.40.4
set logical-systems C protocols bgp group internal-peers export send-direct
set logical-systems C protocols bgp group internal-peers bfd-liveness-detection
    minimum-interval 1000
set logical-systems C protocols bgp group internal-peers neighbor 192.163.6.4
set logical-systems C protocols bgp group internal-peers neighbor 192.168.6.5
set logical-systems C protocols ospf area 0.0.0.0 interface lo0.3 passive
set logical-systems C protocols ospf area 0.0.0.0 interface lt-1/2/0.6
set logical-systems C policy-options policy-statement send-direct term 2 from protocol
    direct
set logical-systems C policy-options policy-statement send-direct term 2 then accept
set logical-systems C routing-options router-id 192.168.40.4
set logical-systems C routing-options autonomous-system 17

```

### *Configuring Device A*

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure Device A:

1. Set the CLI to Logical System A.  

```
user@host> set cli logical-system A
```
2. Configure the interfaces.  

```
[edit interfaces lt-1/2/0 unit 1]
user@host:A# set description to-B
user@host:A# set encapsulation ethernet
```



```
user@host:A# set peer-unit 2
user@host:A# set family inet address 10.10.10.1/30
```

```
[edit interfaces lo0 unit 1]
user@host:A# set family inet address 192.168.6.5/32
```

3. Configure BGP.

The **neighbor** statements are included for both Device B and Device C, even though Device A is not directly connected to Device C.

```
[edit protocols bgp group internal-peers]
user@host:A# set type internal
user@host:A# set local-address 192.168.6.5
user@host:A# set export send-direct
user@host:A# set neighbor 192.163.6.4
user@host:A# set neighbor 192.168.40.4
```

4. Configure BFD.

```
[edit protocols bgp group internal-peers]
user@host:A# set bfd-liveness-detection minimum-interval 1000
```

You must configure the same minimum interval on the connecting peer.

5. (Optional) Configure BFD tracing.

```
[edit protocols bgp group internal-peers]
user@host:A# set traceoptions file bgp-bfd
user@host:A# set traceoptions flag bfd detail
```

6. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@host:A# set interface lo0.1 passive
user@host:A# set interface lt-1/2/0.1
```

7. Configure a policy that accepts direct routes.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 2]
user@host:A# set from protocol direct
user@host:A# set then accept
```

8. Configure the router ID and the autonomous system (AS) number.

```
[edit routing-options]
user@host:A# set router-id 192.168.6.5
user@host:A# set autonomous-system 17
```

9. If you are done configuring the device, enter **commit** from configuration mode. Repeat these steps to configure Device B and Device C.

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.



```
user@host:A# show interfaces
lt-1/2/0 {
  unit 1 {
    description to-B;
    encapsulation ethernet;
    peer-unit 2;
    family inet {
      address 10.10.10.1/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 192.168.6.5/32;
    }
  }
}

user@host:A# show policy-options
policy-statement send-direct {
  term 2 {
    from protocol direct;
    then accept;
  }
}

user@host:A# show protocols
bgp {
  group internal-peers {
    type internal;
    traceoptions {
      file bgp-bfd;
      flag bfd detail;
    }
    local-address 192.168.6.5;
    export send-direct;
    bfd-liveness-detection {
      minimum-interval 1000;
    }
    neighbor 192.163.6.4;
    neighbor 192.168.40.4;
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.1 {
      passive;
    }
    interface lt-1/2/0.1;
  }
}

user@host:A# show routing-options
router-id 192.168.6.5;
autonomous-system 17;
```



**Verification**

Confirm that the configuration is working properly.

- [Verifying That BFD Is Enabled on page 2850](#)
- [Verifying That BFD Sessions Are Up on page 2850](#)
- [Viewing Detailed BFD Events on page 2851](#)
- [Viewing Detailed BFD Events After Deactivating and Reactivating a Loopback Interface on page 2852](#)

**Verifying That BFD Is Enabled**

**Purpose** Verify that BFD is enabled between the IBGP peers.

**Action** From operational mode, enter the **show bgp neighbor** command. You can use the **| match bfd** filter to narrow the output.

```
user@host:A> show bgp neighbor | match bfd
Options: <BfdEnabled>
  BFD: enabled, up
  Trace file: /var/log/A/bgp-bfd size 131072 files 10
Options: <BfdEnabled>
  BFD: enabled, up
  Trace file: /var/log/A/bgp-bfd size 131072 files 10
```

**Meaning** The output shows that Logical System A has two neighbors with BFD enabled. When BFD is not enabled, the output displays **BFD: disabled, down**, and the **<BfdEnabled>** option is absent. If BFD is enabled and the session is down, the output displays **BFD: enabled, down**. The output also shows that BFD-related events are being written to a log file because trace operations are configured.

**Verifying That BFD Sessions Are Up**

**Purpose** Verify that the BFD sessions are up, and view details about the BFD sessions.

**Action** From operational mode, enter the **show bfd session extensive** command.

```
user@host:A> show bfd session extensive
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
192.163.6.4	Up		3.000	1.000	3
Client BGP, TX interval 1.000, RX interval 1.000					
Session up time 00:54:40					
Local diagnostic None, remote diagnostic None					
Remote state Up, version 1					
Logical system 12, routing table index 25					
Min async interval 1.000, min slow interval 1.000					
Adaptive async TX interval 1.000, RX interval 1.000					
Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3					
Remote min TX interval 1.000, min RX interval 1.000, multiplier 3					
Local discriminator 10, remote discriminator 9					
Echo mode disabled/inactive					
Multi-hop route table 25, local-address 192.168.6.5					

Detect Transmit



```

Address          State    Interface    Time    Interval  Multiplier
192.168.40.4      Up      Up           3.000   1.000     3
Client BGP, TX interval 1.000, RX interval 1.000
Session up time 00:48:03
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Logical system 12, routing table index 25
Min async interval 1.000, min slow interval 1.000
Adaptive async TX interval 1.000, RX interval 1.000
Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3
Remote min TX interval 1.000, min RX interval 1.000, multiplier 3
Local discriminator 14, remote discriminator 13
Echo mode disabled/inactive
Multi-hop route table 25, local-address 192.168.6.5

2 sessions, 2 clients
Cumulative transmit rate 2.0 pps, cumulative receive rate 2.0 pps

```

**Meaning** The TX interval 1.000, RX interval 1.000 output represents the setting configured with the **minimum-interval** statement. All of the other output represents the default settings for BFD. To modify the default settings, include the optional statements under the **bfd-liveness-detection** statement.

#### *Viewing Detailed BFD Events*

**Purpose** View the contents of the BFD trace file to assist in troubleshooting, if needed.

**Action** From operational mode, enter the **file show /var/log/A/bgp-bfd** command.

```

user@host:A> file show /var/log/A/bgp-bfd
Aug 15 17:07:25 trace_on: Tracing to "/var/log/A/bgp-bfd" started
Aug 15 17:07:26.492190 bgp_peer_init: BGP peer 192.163.6.4 (Internal AS 17) local
address 192.168.6.5 not found. Leaving peer idled
Aug 15 17:07:26.493176 bgp_peer_init: BGP peer 192.168.40.4 (Internal AS 17) local
address 192.168.6.5 not found. Leaving peer idled
Aug 15 17:07:32.597979 task_connect: task BGP_17.192.163.6.4+179 addr
192.163.6.4+179: No route to host
Aug 15 17:07:32.599623 bgp_connect_start: connect 192.163.6.4 (Internal AS 17):
No route to host
Aug 15 17:07:36.869394 task_connect: task BGP_17.192.168.40.4+179 addr
192.168.40.4+179: No route to host
Aug 15 17:07:36.870624 bgp_connect_start: connect 192.168.40.4 (Internal AS 17):
No route to host
Aug 15 17:08:04.599220 task_connect: task BGP_17.192.163.6.4+179 addr
192.163.6.4+179: No route to host
Aug 15 17:08:04.601135 bgp_connect_start: connect 192.163.6.4 (Internal AS 17):
No route to host
Aug 15 17:08:08.869717 task_connect: task BGP_17.192.168.40.4+179 addr
192.168.40.4+179: No route to host
Aug 15 17:08:08.869934 bgp_connect_start: connect 192.168.40.4 (Internal AS 17):
No route to host
Aug 15 17:08:36.603544 advertising receiving-speaker only capability to neighbor
192.163.6.4 (Internal AS 17)
Aug 15 17:08:36.606726 bgp_read_message: 192.163.6.4 (Internal AS 17): 0 bytes
buffered
Aug 15 17:08:36.609119 Initiated BFD session to peer 192.163.6.4 (Internal AS
17): address=192.163.6.4 ifindex=0 ifname=(none) txivl=1000 rxivl=1000 mult=3
ver=255
Aug 15 17:08:36.734033 advertising receiving-speaker only capability to neighbor

```



```

192.168.40.4 (Internal AS 17)
Aug 15 17:08:36.738436 Initiated BFD session to peer 192.168.40.4 (Internal AS
17): address=192.168.40.4 ifindex=0 ifname=(none) txivl=1000 rxivl=1000 mult=3
ver=255
Aug 15 17:08:40.537552 BFD session to peer 192.163.6.4 (Internal AS 17) up
Aug 15 17:08:40.694410 BFD session to peer 192.168.40.4 (Internal AS 17) up

```

**Meaning** Before the routes are established, the **No route to host** message appears in the output. After the routes are established, the last two lines show that both BFD sessions come up.

### *Viewing Detailed BFD Events After Deactivating and Reactivating a Loopback Interface*

**Purpose** Check to see what happens after bringing down a router or switch and then bringing it back up. To simulate bringing down a router or switch, deactivate the loopback interface on Logical System B.

**Action** 1. From configuration mode, enter the **deactivate logical-systems B interfaces lo0 unit 2 family inet** command.

```

user@host:A# deactivate logical-systems B interfaces lo0 unit 2 family inet
user@host:A# commit

```

2. From operational mode, enter the **file show /var/log/A/bgp-bfd** command.

```

user@host:A> file show /var/log/A/bgp-bfd
...
Aug 15 17:20:55.995648 bgp_read_v4_message:9747: NOTIFICATION received from
192.163.6.4 (Internal AS 17): code 6 (Cease) subcode 6 (Other Configuration
Change)
Aug 15 17:20:56.004508 Terminated BFD session to peer 192.163.6.4 (Internal
AS 17)
Aug 15 17:21:28.007755 task_connect: task BGP_17.192.163.6.4+179 addr
192.163.6.4+179: No route to host
Aug 15 17:21:28.008597 bgp_connect_start: connect 192.163.6.4 (Internal AS
17): No route to host

```

3. From configuration mode, enter the **activate logical-systems B interfaces lo0 unit 2 family inet** command.

```

user@host:A# activate logical-systems B interfaces lo0 unit 2 family inet
user@host:A# commit

```

4. From operational mode, enter the **file show /var/log/A/bgp-bfd** command.

```

user@host:A> file show /var/log/A/bgp-bfd
...
Aug 15 17:25:53.623743 advertising receiving-speaker only capability to neighbor
192.163.6.4 (Internal AS 17)
Aug 15 17:25:53.631314 Initiated BFD session to peer 192.163.6.4 (Internal AS
17): address=192.163.6.4 ifindex=0 ifname=(none) txivl=1000 rxivl=1000 mult=3
ver=255
Aug 15 17:25:57.570932 BFD session to peer 192.163.6.4 (Internal AS 17) up

```

**Related Documentation**

- [Understanding External BGP Peering Sessions on page 2643](#)
- [BGP Configuration Overview](#)



## Example: Configuring BFD Authentication for BGP

- [Understanding BFD Authentication for BGP on page 2853](#)
- [Example: Configuring BFD Authentication for BGP on page 2854](#)

### Understanding BFD Authentication for BGP

Bidirectional Forwarding Detection protocol (BFD) enables rapid detection of communication failures between adjacent systems. By default, authentication for BFD sessions is disabled. However, when you run BFD over Network Layer protocols, the risk of service attacks can be significant. We strongly recommend using authentication if you are running BFD over multiple hops or through insecure tunnels. Beginning with Junos OS Release 9.6, Junos OS supports authentication for BFD sessions running over BGP. BFD authentication is not supported on MPLS OAM sessions. BFD authentication is only supported in the Canada and United States version of the Junos OS image and is not available in the export version.

You authenticate BFD sessions by specifying an authentication algorithm and keychain, and then associating that configuration information with a security authentication keychain using the keychain name.

The following sections describe the supported authentication algorithms, security keychains, and level of authentication that can be configured:

- [BFD Authentication Algorithms on page 2853](#)
- [Security Authentication Keychains on page 2854](#)
- [Strict Versus Loose Authentication on page 2854](#)

### **BFD Authentication Algorithms**

Junos OS supports the following algorithms for BFD authentication:

- **simple-password**—Plain-text password. One to 16 bytes of plain text are used to authenticate the BFD session. One or more passwords can be configured. This method is the least secure and should be used only when BFD sessions are not subject to packet interception.
- **keyed-md5**—Keyed Message Digest 5 hash algorithm for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed MD5 uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than or equal to the last sequence number received. Although more secure than a simple password, this method is vulnerable to replay attacks. Increasing the rate at which the sequence number is updated can reduce this risk.
- **meticulous-keyed-md5**—Meticulous keyed Message Digest 5 hash algorithm. This method works in the same manner as keyed MD5, but the sequence number is updated with every packet. Although more secure than keyed MD5 and simple passwords, this method might take additional time to authenticate the session.



- **keyed-sha-1**—Keyed Secure Hash Algorithm I for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed SHA uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. The key is not carried within the packets. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than the last sequence number received.
- **meticulous-keyed-sha-1**—Meticulous keyed Secure Hash Algorithm I. This method works in the same manner as keyed SHA, but the sequence number is updated with every packet. Although more secure than keyed SHA and simple passwords, this method might take additional time to authenticate the session.



**NOTE:** Nonstop active routing (NSR) is not supported with meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

---

### **Security Authentication Keychains**

The security authentication keychain defines the authentication attributes used for authentication key updates. When the security authentication keychain is configured and associated with a protocol through the keychain name, authentication key updates can occur without interrupting routing and signaling protocols.

The authentication keychain contains one or more keychains. Each keychain contains one or more keys. Each key holds the secret data and the time at which the key becomes valid. The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.

BFD allows multiple clients per session, and each client can have its own keychain and algorithm defined. To avoid confusion, we recommend specifying only one security authentication keychain.

### **Strict Versus Loose Authentication**

By default, strict authentication is enabled and authentication is checked at both ends of each BFD session. Optionally, to smooth migration from nonauthenticated sessions to authenticated sessions, you can configure *loose checking*. When loose checking is configured, packets are accepted without authentication being checked at each end of the session. This feature is intended for transitional periods only.

---

### **Example: Configuring BFD Authentication for BGP**

Beginning with Junos OS Release 9.6, you can configure authentication for BFD sessions running over BGP. Only three steps are needed to configure authentication on a BFD session:

1. Specify the BFD authentication algorithm for the BGP protocol.
2. Associate the authentication keychain with the BGP protocol.



3. Configure the related security authentication keychain.

The following sections provide instructions for configuring and viewing BFD authentication on BGP:

- [Configuring BFD Authentication Parameters on page 2855](#)
- [Viewing Authentication Information for BFD Sessions on page 2856](#)

### **Configuring BFD Authentication Parameters**

BFD authentication can be configured for the entire BGP protocol, or a specific BGP group, neighbor, or routing instance.

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure BFD authentication:

1. Specify the algorithm (**keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, **meticulous-keyed-sha-1**, or **simple-password**) to use.

```
[edit]
user@host# set protocols bgp bfd-liveness-detection authentication algorithm
keyed-sha-1
user@host# set protocols bgp group bgp-gr1 bfd-liveness-detection authentication
algorithm keyed-sha-1
user@host# set protocols bgp group bgp-gr1 neighbor 10.10.10.7 bfd-liveness-detection
authentication algorithm keyed-sha-1
```



**NOTE:** Nonstop active routing is not supported with meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

2. Specify the keychain to be used to associate BFD sessions on BGP with the unique security authentication keychain attributes.

The keychain name you specify must match a keychain name configured at the **[edit security authentication key-chains]** hierarchy level.

```
[edit]
user@host# set protocols bgp bfd-liveness-detection authentication keychain bfd-bgp
user@host# set protocols bgp group bgp-gr1 bfd-liveness-detection authentication
keychain bfd-bgp
user@host# set protocols bgp group bgp-gr1 neighbor 10.10.10.7 bfd-liveness-detection
authentication keychain bfd-bgp
```



**NOTE:** The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.



## 3. Specify the unique security authentication information for BFD sessions:

- The matching keychain name as specified in Step 2.
- At least one key, a unique integer between 0 and 63. Creating multiple keys allows multiple clients to use the BFD session.
- The secret data used to allow access to the session.
- The time at which the authentication key becomes active, in the format *yyyy-mm-dd.hh:mm:ss*.

```
[edit security]
```

```
user@host# set authentication-key-chains key-chain bfd-bgp key 53 secret
$9$ggaJDmPQ6/tJgF/AtREVsyPsnCtUHm start-time 2009-06-14.10:00:00
```

## 4. (Optional) Specify loose authentication checking if you are transitioning from nonauthenticated sessions to authenticated sessions.

```
[edit]
```

```
user@host# set protocols bgp bfd-liveness-detection authentication loose-check
user@host# set protocols bgp group bgp-gr1 bfd-liveness-detection authentication
loose-check
```

```
user@host# set protocols bgp group bgp-gr1 neighbor 10.10.10.7 bfd-liveness-detection
authentication loose-check
```

5. (Optional) View your configuration using the **show bfd session detail** or **show bfd session extensive** command.

## 6. Repeat these steps to configure the other end of the BFD session.



**NOTE:** BFD authentication is only supported in the Canada and United States version of the Junos OS image and is not available in the export version.

### Viewing Authentication Information for BFD Sessions

You can view the existing BFD authentication configuration using the **show bfd session detail** and **show bfd session extensive** commands.

The following example shows BFD authentication configured for the **bgp-gr1** BGP group. It specifies the keyed SHA-1 authentication algorithm and a keychain name of **bfd-bgp**. The authentication keychain is configured with two keys. Key 1 contains the secret data “\$9\$ggaJDmPQ6/tJgF/AtREVsyPsnCtUHm” and a start time of June 1, 2009, at 9:46:02 AM PST. Key 2 contains the secret data “\$9\$a5jiKW9L.reP38ny.TszF2/9” and a start time of June 1, 2009, at 3:29:20 PM PST.

```
[edit protocols bgp]
group bgp-gr1 {
  bfd-liveness-detection {
    authentication {
      algorithm keyed-sha-1;
      key-chain bfd-bgp;
    }
  }
}
```



```
[edit security]
authentication key-chains {
  key-chain bfd-bgp {
    key 1 {
      secret "$9$ggaJDmPQ6/tJgF/AtREVsyPsnCtUHM";
      start-time "2009-6-1.09:46:02 -0700";
    }
    key 2 {
      secret "$9$a5jiKW9l.reP38ny.TszF2/9";
      start-time "2009-6-1.15:29:20 -0700";
    }
  }
}
```

If you commit these updates to your configuration, you see output similar to the following. In the output for the **show bfd session detail** command, **Authenticate** is displayed to indicate that BFD authentication is configured. For more information about the configuration, use the **show bfd session extensive** command. The output for this command provides the keychain name, the authentication algorithm and mode for each client in the session, and the overall BFD authentication configuration status, keychain name, and authentication algorithm and mode.

#### show bfd session detail

```
user@host# show bfd session detail
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
50.0.0.2	Up	ge-0/1/5.0	0.900	0.300	3

Client BGP, TX interval 0.300, RX interval 0.300, **Authenticate**  
 Session up time 3d 00:34  
 Local diagnostic None, remote diagnostic NbrSignal  
 Remote state Up, version 1  
 Replicated

#### show bfd session extensive

```
user@host# show bfd session extensive
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
50.0.0.2	Up	ge-0/1/5.0	0.900	0.300	3

Client BGP, TX interval 0.300, RX interval 0.300, **Authenticate**  
**keychain bfd-bgp, algo keyed-sha-1, mode strict**  
 Session up time 00:04:42  
 Local diagnostic None, remote diagnostic NbrSignal  
 Remote state Up, version 1  
 Replicated  
 Min async interval 0.300, min slow interval 1.000  
 Adaptive async TX interval 0.300, RX interval 0.300  
 Local min TX interval 0.300, minimum RX interval 0.300, multiplier 3  
 Remote min TX interval 0.300, min RX interval 0.300, multiplier 3  
 Local discriminator 2, remote discriminator 2  
 Echo mode disabled/inactive  
**Authentication enabled/active, keychain bfd-bgp, algo keyed-sha-1, mode strict**

#### Related Documentation

- [Understanding External BGP Peering Sessions on page 2643](#)
- [BGP Configuration Overview](#)



## BGP Load Balancing Configuration

---

- [Examples: Configuring BGP Multipath on page 2858](#)
- [Example: Advertising Multiple BGP Paths to a Destination on page 2874](#)

### Examples: Configuring BGP Multipath

- [Understanding BGP Multipath on page 2858](#)
- [Example: Load Balancing BGP Traffic on page 2858](#)
- [Example: Configuring Single-Hop EBGP Peers to Accept Remote Next Hops on page 2863](#)

### Understanding BGP Multipath

---

The Junos OS BGP multipath feature supports the following applications:

- Load balancing across multiple links between two routing devices belonging to different autonomous systems (ASs)
- Load balancing across a common subnet or multiple subnets to different routing devices belonging to the same peer AS
- Load balancing across multiple links between two routing devices belonging to different external confederation peers
- Load balancing across a common subnet or multiple subnets to different routing devices belonging to external confederation peers

In a common scenario for load balancing, a customer is multihomed to multiple routers in a point of presence (POP). The default behavior is to send all traffic across only one of the available links. Load balancing causes traffic to use two or more of the links.

BGP multipath does not apply to paths that share the same MED-plus-IGP cost, yet differ in IGP cost. Multipath path selection is based on the IGP cost metric, even if two paths have the same MED-plus-IGP cost.

### Example: Load Balancing BGP Traffic

---

This example shows how to configure BGP to select multiple equal-cost external BGP (EBGP) or internal BGP (IBGP) paths as active paths.

- [Requirements on page 2858](#)
- [Overview on page 2859](#)
- [Configuration on page 2860](#)
- [Verification on page 2861](#)

#### **Requirements**

Before you begin:

- Configure the device interfaces.
- Configure an interior gateway protocol (IGP).



- Configure BGP.
- Configure a routing policy that exports routes (such as direct routes or IGP routes) from the routing table into BGP.

### Overview

The following steps shows how to configure per-packet load balancing:

1. Define a load-balancing routing policy by including one or more **policy-statement** statements at the **[edit policy-options]** hierarchy level, defining an action of **load-balance per-packet**:

```
policy-statement policy-name {
  from {
    match-conditions;
    route-filter destination-prefix match-type <actions>;
    prefix-list name;
  }
  then {
    load-balance per-packet;
  }
}
```

2. Apply the policy to routes exported from the routing table to the forwarding table. To do this, include the **forwarding-table** and **export** statements:

```
forwarding-table {
  export policy-name;
}
```

You cannot apply the export policy to VRF routing instances.


3. Specify all next-hops of that route, if more than one exists, when allocating a label corresponding to a route that is being advertised.
4. Configure the forwarding-options hash key for MPLS to include the IP payload.

In this example, Device R1 is in AS 65000 and is connected to both Device R2 and Device R3, which are in AS 65001. This example shows the configuration on Device R1.

### Topology

[Figure 71 on page 2859](#) shows the topology used in this example.

**Figure 71: BGP Load Balancing**

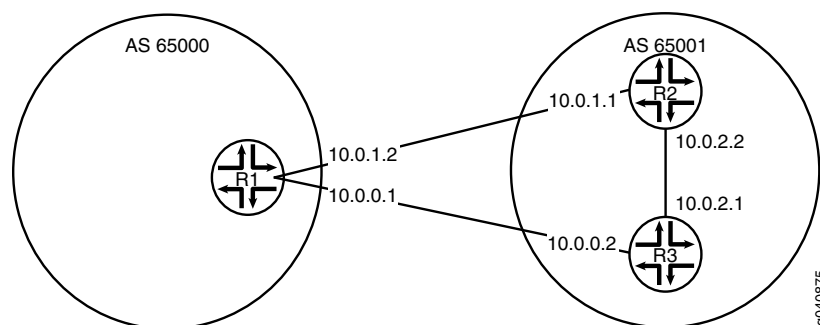



### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set protocols bgp group external type external
set protocols bgp group external peer-as 65001
set protocols bgp group external multipath
set protocols bgp group external neighbor 10.0.1.1
set protocols bgp group external neighbor 10.0.0.2
set policy-options policy-statement loadbal from route-filter 10.0.0.0/16 orlonger
set policy-options policy-statement loadbal then load-balance per-packet
set routing-options forwarding-table export loadbal
set routing-options autonomous-system 65000
```

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure the BGP peer sessions:

1. Configure the BGP group.

```
[edit protocols bgp group external]
user@R1# set type external
user@R1# set peer-as 65001
user@R1# set neighbor 10.0.1.1
user@R1# set neighbor 10.0.0.2
```

2. Enable the BGP group to use multiple paths.



**NOTE:** To disable the default check requiring that paths accepted by BGP multipath must have the same neighboring autonomous system (AS), include the `multiple-as` option.

```
[edit protocols bgp group external]
user@R1# set multipath
```

3. Configure the load-balancing policy.

```
[edit policy-options policy-statement loadbal]
user@R1# set from route-filter 10.0.0.0/16 orlonger
user@R1# set then load-balance per-packet
```

4. Apply the load-balancing policy.

```
[edit routing-options]
user@R1# set forwarding-table export loadbal
```

5. Configure the local autonomous system (AS) number.

```
[edit routing-options]
user@R1# set autonomous-system 65000
```



**Results** From configuration mode, confirm your configuration by entering the **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@R1# show protocols
bgp {
  group external {
    type external;
    peer-as 65001;
    multipath;
    neighbor 10.0.1.1;
    neighbor 10.0.0.2;
  }
}

[edit]
user@R1# show policy-options
policy-statement loadbal {
  from {
    route-filter 10.0.0.0/16 orlonger;
  }
  then {
    load-balance per-packet;
  }
}

[edit]
user@R1# show routing-options
autonomous-system 65000;
forwarding-table {
  export loadbal;
}
```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly:

- [Verifying Routes on page 2861](#)
- [Verifying Forwarding on page 2862](#)

### Verifying Routes

**Purpose** Verify that routes are learned from both routers in the neighboring AS.

**Action** From operational mode, run the **show route** command.

```
user@R1> show route 10.0.2.0
inet.0: 12 destinations, 15 routes (12 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.2.0/30          *[BGP/170] 03:12:32, localpref 100
                    AS path: 65001 I
                    to 10.0.1.1 via ge-1/2/0.0
```



```

> to 10.0.0.2 via ge-1/2/1.0
[BGP/170] 03:12:32, localpref 100
AS path: 65001 I
> to 10.0.1.1 via ge-1/2/0.0

```

```

user@R1> show route 10.0.2.0 detail
inet.0: 12 destinations, 15 routes (12 active, 0 holddown, 0 hidden)
10.0.2.0/30 (2 entries, 1 announced)
  *BGP      Preference: 170/-101
            Next hop type: Router, Next hop index: 262142
            Next-hop reference count: 3
            Source: 10.0.0.2
            Next hop: 10.0.1.1 via ge-1/2/0.0
            Next hop: 10.0.0.2 via ge-1/2/1.0, selected
            State: <Active Ext>
            Local AS: 65000 Peer AS: 65001
            Age: 3:18:30
            Task: BGP_65001.10.0.0.2+55402
            Announcement bits (1): 2-KRT
            AS path: 65001 I
            Accepted Multipath
            Localpref: 100
            Router ID: 192.168.2.1
  BGP      Preference: 170/-101
            Next hop type: Router, Next hop index: 602
            Next-hop reference count: 5
            Source: 10.0.1.1
            Next hop: 10.0.1.1 via ge-1/2/0.0, selected
            State: <NotBest Ext>
            Inactive reason: Not Best in its group - Active preferred
            Local AS: 65000 Peer AS: 65001
            Age: 3:18:30
            Task: BGP_65001.10.0.1.1+53135
            AS path: 65001 I
            Accepted
            Localpref: 100
            Router ID: 192.168.3.1

```

**Meaning** The active path, denoted with an asterisk (\*), has two next hops: 10.0.1.1 and 10.0.0.2 to the 10.0.2.0 destination. The 10.0.1.1 next hop is copied from the inactive path to the active path.

### *Verifying Forwarding*

**Purpose** Verify that both next hops are installed in the forwarding table.

**Action** From operational mode, run the **show route forwarding-table** command.

```

user@R1> show route forwarding-table destination 10.0.2.0
Routing table: default.inet
Internet:
Destination      Type RtRef Next hop          Type Index NhRef Netif
10.0.2.0/30      user   0   10.0.1.1          ucst  602   5   ge-1/2/0.0
                  10.0.0.2          ucst  522   6   ge-1/2/1.0

```



### Example: Configuring Single-Hop EBGP Peers to Accept Remote Next Hops

This example shows how to configure a single-hop external BGP (EBGP) peer to accept a remote next hop with which it does not share a common subnet.

- [Requirements on page 2863](#)
- [Overview on page 2863](#)
- [Configuration on page 2864](#)
- [Verification on page 2872](#)

#### Requirements

No special configuration beyond device initialization is required before you configure this example.

#### Overview

In some situations, it is necessary to configure a single-hop EBGP peer to accept a remote next hop with which it does not share a common subnet. The default behavior is for any next-hop address received from a single-hop EBGP peer that is not recognized as sharing a common subnet to be discarded. The ability to have a single-hop EBGP peer accept a remote next hop to which it is not directly connected also prevents you from having to configure the single-hop EBGP neighbor as a multihop session. When you configure a multihop session in this situation, all next-hop routes learned through this EBGP peer are labeled indirect even when they do share a common subnet. This situation breaks multipath functionality for routes that are recursively resolved over routes that include these next-hop addresses. Configuring the `accept-remote-nexthop` statement allows a single-hop EBGP peer to accept a remote next hop, which restores multipath functionality for routes that are resolved over these next-hop addresses. You can configure this statement at the global, group, and neighbor hierarchy levels for BGP. The statement is also supported on logical systems and the VPN routing and forwarding (VRF) routing instance type. Both the remote next-hop and the EBGP peer must support BGP route refresh as defined in RFC 2918, *Route Refresh Capability in BGP-4*. If the remote peer does not support BGP route refresh, the session is reset.



**NOTE:** You cannot configure both the `multihop` and `accept-remote-nexthop` statements for the same EBGP peer.


When you enable a single-hop EBGP peer to accept a remote next hop, you must also configure an import routing policy on the EBGP peer that specifies the remote next-hop address.

This example includes an import routing policy, `agg_route`, that enables a single-hop external BGP peer (Device R1) to accept the remote next-hop 1.1.10.10 for the route to the 1.1.230.0/23 network. At the `[edit protocols bgp]` hierarchy level, the example includes the `import agg_route` statement to apply the policy to the external BGP peer and includes the `accept-remote-nexthop` statement to enable the single-hop EBGP peer to accept the remote next hop.



Figure 72 on page 2864 shows the sample topology.

Figure 72: Topology for Accepting a Remote Next Hop

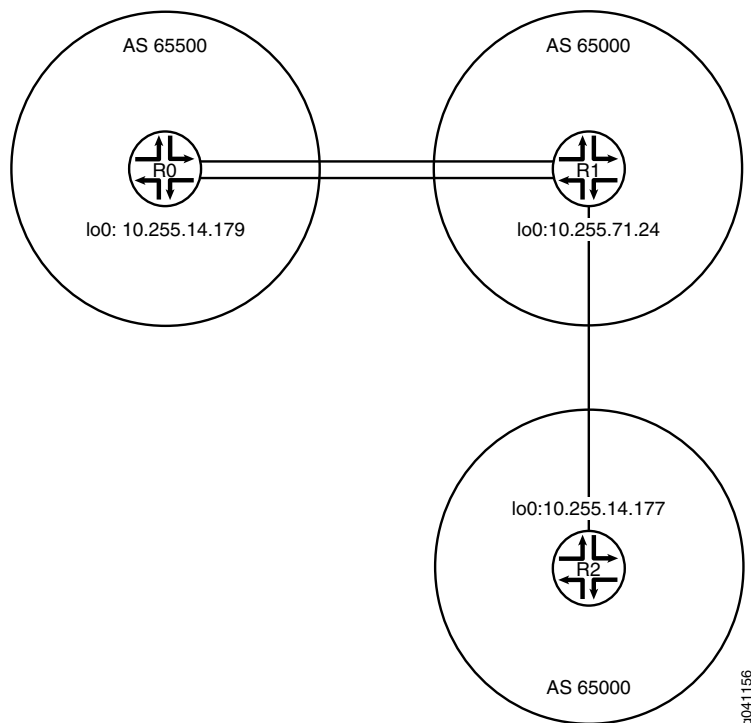

#### Configuration

- [Device R0 on page 2865](#)
- [Configuring Device R1 on page 2868](#)
- [Configuring Device R2 on page 2870](#)

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R0**

```

set interfaces fe-1/2/0 unit 1 family inet address 1.1.0.1/30
set interfaces fe-1/2/1 unit 2 family inet address 1.1.1.1/30
set interfaces lo0 unit 1 family inet address 10.255.14.179/32
set protocols bgp group ext type external
set protocols bgp group ext export test_route
set protocols bgp group ext export agg_route
set protocols bgp group ext peer-as 65000
set protocols bgp group ext multipath
set protocols bgp group ext neighbor 1.1.0.2
set protocols bgp group ext neighbor 1.1.1.2
set policy-options policy-statement agg_route term 1 from protocol static
set policy-options policy-statement agg_route term 1 from route-filter 1.1.230.0/23 exact
set policy-options policy-statement agg_route term 1 then accept
set policy-options policy-statement test_route term 1 from protocol static
set policy-options policy-statement test_route term 1 from route-filter 1.1.10.10/32 exact

```



```

set policy-options policy-statement test_route term 1 then accept
set routing-options static route 1.1.10.10/32 reject
set routing-options static route 1.1.230.0/23 reject
set routing-options autonomous-system 65500

```

**Device R1**

```

set interfaces fe-1/2/0 unit 3 family inet address 1.1.0.2/30
set interfaces fe-1/2/1 unit 4 family inet address 1.12.0.1/30
set interfaces fe-1/2/2 unit 5 family inet address 1.1.1.2/30
set interfaces lo0 unit 2 family inet address 10.255.71.24/32
set protocols bgp accept-remote-nexthop
set protocols bgp group ext type external
set protocols bgp group ext import agg_route
set protocols bgp group ext peer-as 65500
set protocols bgp group ext multipath
set protocols bgp group ext neighbor 1.1.0.1
set protocols bgp group ext neighbor 1.1.1.1
set protocols bgp group int type internal
set protocols bgp group int local-address 10.255.71.24
set protocols bgp group int neighbor 10.255.14.177
set protocols ospf area 0.0.0.0 interface fe-1/2/1.4
set protocols ospf area 0.0.0.0 interface 10.255.71.24
set policy-options policy-statement agg_route term 1 from protocol bgp
set policy-options policy-statement agg_route term 1 from route-filter 1.1.230.0/23 exact
set policy-options policy-statement agg_route term 1 then next-hop 1.1.10.10
set policy-options policy-statement agg_route term 1 then accept
set routing-options autonomous-system 65000

```

**Device R2**

```

set interfaces fe-1/2/0 unit 6 family inet address 1.12.0.2/30
set interfaces lo0 unit 3 family inet address 10.255.14.177/32
set protocols bgp group int type internal
set protocols bgp group int local-address 10.255.14.177
set protocols bgp group int neighbor 10.255.71.24
set protocols ospf area 0.0.0.0 interface fe-1/2/0.6
set protocols ospf area 0.0.0.0 interface 10.255.14.177
set routing-options autonomous-system 65000

```

### *Device R0*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure Device R0:

1. Configure the interfaces.

```

[edit interfaces fe-1/2/0 unit 1]
user@R0# set family inet address 1.1.0.1/30

```

```

[edit interfaces fe-1/2/1 unit 2]
user@R0# set family inet address 1.1.1.1/30

```

```

[edit interfaces lo0 unit 1]
user@R0# set family inet address 10.255.14.179/32

```



2. Configure EBGP.  

```
[edit protocols bgp group ext]
user@R0# set type external
user@R0# set peer-as 65000
user@R0# set neighbor 1.1.0.2
user@R0# set neighbor 1.1.1.2
```
3. Enable multipath BGP between Device R0 and Device R1.  

```
[edit protocols bgp group ext]
user@R0# set multipath
```
4. Configure static routes to remote networks.  
These routes are not part of the topology. The purpose of these routes is to demonstrate the functionality in this example.  

```
[edit routing-options]
user@R0# set static route 1.1.10.10/32 reject
user@R0# set static route 1.1.230.0/23 reject
```
5. Configure routing policies that accept the static routes.  

```
[edit policy-options policy-statement agg_route term 1]
user@R0# set from protocol static
user@R0# set from route-filter 1.1.230.0/23 exact
user@R0# set then accept

[edit policy-options policy-statement test_route term 1]
user@R0# set from protocol static
user@R0# set from route-filter 1.1.10.10/32 exact
user@R0# set then accept
```
6. Export the **agg\_route** and **test\_route** policies from the routing table into BGP.  

```
[edit protocols bgp group ext]
user@R0# set export test_route
user@R0# set export agg_route
```
7. Configure the autonomous system (AS) number.  

```
[edit routing-options]
user@R0# set autonomous-system 65500
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R0# show interfaces
fe-1/2/0 {
  unit 1 {
    family inet {
      address 1.1.0.1/30;
    }
  }
}
fe-1/2/1 {
```



```

    unit 2 {
      family inet {
        address 1.1.1.1/30;
      }
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 10.255.14.179/32;
    }
  }
}

user@R0# show policy-options
policy-statement agg_route {
  term 1 {
    from {
      protocol static;
      route-filter 1.1.230.0/23 exact;
    }
    then accept;
  }
}
policy-statement test_route {
  term 1 {
    from {
      protocol static;
      route-filter 1.1.10.10/32 exact;
    }
    then accept;
  }
}

user@R0# show protocols
bgp {
  group ext {
    type external;
    export [ test_route agg_route ];
    peer-as 65000;
    multipath;
    neighbor 1.1.0.2;
    neighbor 1.1.1.2;
  }
}

user@R0# show routing-options
static {
  route 1.1.10.10/32 reject;
  route 1.1.230.0/23 reject;
}
autonomous-system 65500;

```

If you are done configuring the device, enter **commit** from configuration mode.



### *Configuring Device R1*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R1:

1. Configure the interfaces.  

```
[edit interfaces fe-1/2/0 unit 3]
user@R1# set family inet address 1.1.0.2/30

[edit interfaces fe-1/2/1 unit 4]
user@R1# set family inet address 1.12.0.1/30

[edit interfaces fe-1/2/2 unit 5]
user@R1# set family inet address 1.1.1.2/30

[edit interfaces lo0 unit 2]
user@R1# set family inet address 10.255.71.24/32
```
2. Configure OSPF.  

```
[edit protocols ospf area 0.0.0.0]
user@R1# set interface fe-1/2/1.4
user@R1# set interface 10.255.71.24
```
3. Enable Device R1 to accept the remote next hop.  

```
[edit protocols bgp]
user@R1# set accept-remote-nexthop
```
4. Configure IBGP.  

```
[edit protocols bgp group int]
user@R1# set type internal
user@R1# set local-address 10.255.71.24
user@R1# set neighbor 10.255.14.177
```
5. Configure EBGP.  

```
[edit protocols bgp group ext]
user@R1# set type external
user@R1# set peer-as 65500
user@R1# set neighbor 1.1.0.1
user@R1# set neighbor 1.1.1.1
```
6. Enable multipath BGP between Device R0 and Device R1.  

```
[edit protocols bgp group ext]
user@R1# set multipath
```
7. Configure a routing policy that enables a single-hop external BGP peer (Device R1) to accept the remote next-hop 1.1.10.10 for the route to the 1.1.230.0/23 network.  

```
[edit policy-options policy-statement agg_route term 1]
user@R1# set from protocol bgp
user@R1# set from route-filter 1.1.230.0/23 exact
```



```
user@R1# set then next-hop 1.1.10.10
user@R1# set then accept
```

8. Import the **agg\_route** policy into the routing table on Device R1.

```
[edit protocols bgp group ext]
user@R1# set import agg_route
```

9. Configure the autonomous system (AS) number.

```
[edit routing-options]
user@R1# set autonomous-system 65000
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 3 {
    family inet {
      address 1.1.0.2/30;
    }
  }
}
fe-1/2/1 {
  unit 4 {
    family inet {
      address 1.12.0.1/30;
    }
  }
}
fe-1/2/2 {
  unit 5 {
    family inet {
      address 1.1.1.2/30;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 10.255.71.24/32;
    }
  }
}

user@R1# show policy-options
policy-statement agg_route {
  term 1 {
    from {
      protocol bgp;
      route-filter 1.1.230.0/23 exact;
    }
    then {
      next-hop 1.1.10.10;
    }
  }
}
```



```
        accept;
      }
    }
  }

user@R1# show protocols
bgp {
  accept-remote-nexthop;
  group ext {
    type external;
    import agg_route;
    peer-as 65500;
    multipath;
    neighbor 1.1.0.1;
    neighbor 1.1.1.1;
  }
  group int {
    type internal;
    local-address 10.255.71.24;
    neighbor 10.255.14.177;
  }
}
ospf {
  area 0.0.0.0 {
    interface fe-1/2/1.4;
    interface 10.255.71.24;
  }
}

user@R1# show routing-options
autonomous-system 65000;
```

If you are done configuring the device, enter **commit** from configuration mode.

### *Configuring Device R2*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R2:

1. Configure the interfaces.  
  
[edit interfaces fe-1/2/0 unit 6]  
user@R2# set family inet address 1.12.0.2/30  
  
[edit interfaces lo0 unit 3]  
user@R2# set family inet address 10.255.14.177/32
2. Configure OSPF.  
  
[edit protocols ospf area 0.0.0.0]  
user@R2# set interface fe-1/2/0.6  
user@R2# set interface 10.255.14.177
3. Configure IBGP.



```
[edit protocols bgp group int]
user@R2# set type internal
user@R2# set local-address 10.255.14.177
user@R2# set neighbor 10.255.71.24
```

4. Configure the autonomous system (AS) number.

```
[edit routing-options]
user@R1# set autonomous-system 65000
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R2# show interfaces
fe-1/2/0 {
  unit 6 {
    family inet {
      address 1.12.0.2/30;
    }
  }
}
lo0 {
  unit 3 {
    family inet {
      address 10.255.14.177/32;
    }
  }
}

user@R2# show protocols
bgp {
  group int {
    type internal;
    local-address 10.255.14.177;
    neighbor 10.255.71.24;
  }
}
ospf {
  area 0.0.0.0 {
    interface fe-1/2/0.6;
    interface 10.255.14.177;
  }
}

user@R2# show routing-options
autonomous-system 65000;
```

If you are done configuring the device, enter **commit** from configuration mode.



**Verification**

Confirm that the configuration is working properly.

- [Verifying That the Multipath Route with the Indirect Next Hop Is in the Routing Table on page 2872](#)
- [Deactivating and Reactivating the accept-remote-nexthop Statement on page 2873](#)

**Verifying That the Multipath Route with the Indirect Next Hop Is in the Routing Table**

**Purpose** Verify that Device R1 has a route to the 1.1.230.0/23 network.

**Action** From operational mode, enter the **show route 1.1.230.0 extensive** command.

```

user@R1> show route 1.1.230.0 extensive
inet.0: 11 destinations, 13 routes (11 active, 0 holddown, 0 hidden)
Restart Complete
1.1.230.0/23 (2 entries, 1 announced)
TSI:
KRT in-kernel 1.1.230.0/23 -> {indirect(262142)}
Page 0 idx 1 Type 1 val 9168f6c
  Nexthop: 1.1.10.10
  Localpref: 100
  AS path: [65000] 65500 I
  Communities:
Path 1.1.230.0 from 1.1.0.1 Vector len 4. Val: 1
  *BGP Preference: 170/-101
    Next hop type: Indirect
    Address: 0x90c44d8
    Next-hop reference count: 4
    Source: 1.1.0.1
    Next hop type: Router, Next hop index: 262143
    Next hop: 1.1.0.1 via fe-1/2/0.3, selected
    Next hop: 1.1.1.1 via fe-1/2/2.5
    Protocol next hop: 1.1.10.10
    Indirect next hop: 91c0000 262142
    State: <Active Ext>
    Local AS: 65000 Peer AS: 65500
    Age: 2:55:31 Metric2: 0
    Task: BGP_65500.1.1.0.1+64631
    Announcement bits (3): 2-KRT 3-BGP_RT_Background 4-Resolve tree
1
    AS path: 65500 I
    Accepted Multipath
    Localpref: 100
    Router ID: 10.255.14.179
    Indirect next hops: 1
      Protocol next hop: 1.1.10.10
      Indirect next hop: 91c0000 262142
      Indirect path forwarding next hops: 2
        Next hop type: Router
        Next hop: 1.1.0.1 via fe-1/2/0.3
        Next hop: 1.1.1.1 via fe-1/2/2.5
      1.1.10.10/32 Originating RIB: inet.0
      Node path count: 1
      Forwarding nexthops: 2
        Nexthop: 1.1.0.1 via fe-1/2/0.3
        Nexthop: 1.1.1.1 via fe-1/2/2.5
  BGP Preference: 170/-101

```



```

Next hop type: Indirect
Address: 0x90c44d8
Next-hop reference count: 4
Source: 1.1.1.1
Next hop type: Router, Next hop index: 262143
Next hop: 1.1.0.1 via fe-1/2/0.3, selected
Next hop: 1.1.1.1 via fe-1/2/2.5
Protocol next hop: 1.1.10.10
Indirect next hop: 91c0000 262142
State: <NotBest Ext>
Inactive reason: Not Best in its group - Update source
Local AS: 65500 Peer AS: 65500
Age: 2:55:27 Metric2: 0
Task: BGP_65500.1.1.1+53260
AS path: 65500 I
Accepted
Localpref: 100
Router ID: 10.255.14.179
Indirect next hops: 1
  Protocol next hop: 1.1.10.10
  Indirect next hop: 91c0000 262142
  Indirect path forwarding next hops: 2
    Next hop type: Router
    Next hop: 1.1.0.1 via fe-1/2/0.3
    Next hop: 1.1.1.1 via fe-1/2/2.5
  1.1.10.10/32 Originating RIB: inet.0
  Node path count: 1
  Forwarding nexthops: 2
    Nexthop: 1.1.0.1 via fe-1/2/0.3
    Nexthop: 1.1.1.1 via fe-1/2/2.5

```

**Meaning** The output shows that Device R1 has a route to the 1.1.230.0 network with the multipath feature enabled (**Accepted Multipath**). The output also shows that the route has an indirect next hop of 1.1.10.10.

### *Deactivating and Reactivating the accept-remote-nexthop Statement*

**Purpose** Make sure that the multipath route with the indirect next hop is removed from the routing table when you deactivate the **accept-remote-nexthop** statement.

**Action** 1. From configuration mode, enter the **deactivate protocols bgp accept-remote-nexthop** command.

```

user@R1# deactivate protocols bgp accept-remote-nexthop
user@R1# commit

```

2. From operational mode, enter the **show route 1.1.230.0** command.

```

user@R1> show route 1.1.230.0

```

3. From configuration mode, reactivate the statement by entering the **activate protocols bgp accept-remote-nexthop** command.

```

user@R1# activate protocols bgp accept-remote-nexthop
user@R1# commit

```

4. From operational mode, reenter the **show route 1.1.230.0** command.

```

user@R1> show route 1.1.230.0

```

```

inet.0: 11 destinations, 13 routes (11 active, 0 holddown, 0 hidden)

```



**Restart Complete**

+ = Active Route, - = Last Active, \* = Both

```
1.1.230.0/23      *[BGP/170] 03:13:19, localpref 100
                  AS path: 65500 I
                  > to 1.1.0.1 via fe-1/2/0.3
                  to 1.1.1.1 via fe-1/2/2.5
                  [BGP/170] 03:13:15, localpref 100, from 1.1.1.1
                  AS path: 65500 I
                  > to 1.1.0.1 via fe-1/2/0.3
                  to 1.1.1.1 via fe-1/2/2.5
```

**Meaning** When the **accept-remote-nexthop** statement is deactivated, the multipath route to the 1.1.230.0 network is removed from the routing table .

**Related Documentation**

- [Example: Overriding the Default BGP Routing Policy on Packet Transport Switches](#)

## Example: Advertising Multiple BGP Paths to a Destination

- [Understanding the Advertisement of Multiple Paths to a Single Destination in BGP on page 2874](#)
- [Example: Advertising Multiple Paths in BGP on page 2875](#)

### Understanding the Advertisement of Multiple Paths to a Single Destination in BGP

---

BGP peers advertise routes to each other in update messages. BGP stores its routes in the Junos OS routing table (**inet.0**). For each prefix in the routing table, the routing protocol process selects a single best path, called the active path. Unless you configure BGP to advertise multiple paths to the same destination, BGP advertises only the active path.

Instead of advertising only the active path to a destination, you can configure BGP to advertise multiple paths to the destination. Within an autonomous system (AS), the availability of multiple exit points to reach a destination provides the following benefits:

- **Fault tolerance**—Path diversity leads to reduction in restoration time after failure. For instance, a border router after receiving multiple paths to the same destination can precompute a backup path and have it ready so that when the primary path becomes invalid, the border router can use the backup to quickly restore connectivity. Without a backup path, the restoration time depends on BGP reconvergence, which includes withdraw and advertisement messages in the network before a new best path can be learned.
- **Load balancing**—The availability of multiple paths to reach the same destination enables load balancing of traffic, if the routing within the AS meets certain constraints.
- **Maintenance**—The availability of alternate exit points allows for graceful maintenance operation of routers.

The following limitations apply to advertising multiple routes in BGP:

- Address families supported:



- IPv4 unicast (**family inet unicast**)
- IPv6 unicast (**family inet6 unicast**)
- IPv4 labeled unicast (**family inet labeled-unicast**)
- IPv6 labeled unicast (**family inet6 labeled-unicast**)
- Internal BGP (IBGP) peers only. No support on external BGP (EBGP) peers.
- Master instance only. No support for routing instances.
- Graceful restart supported, but not nonstop active routing (NSR).
- No BGP Monitoring Protocol (BMP) support.
- No support for EBGP sessions between confederations.
- Prefix policies enable you to filter routes on a router that is configured to advertise multiple paths to a destination. However, prefix policies can only match routes. Prefix policies cannot change the attributes of routes.

### Example: Advertising Multiple Paths in BGP

In this example, BGP routers are configured to advertise multiple paths instead of advertising only the active path. Advertising multiple paths in BGP is specified in Internet draft draft-ietf-idr-add-paths-04.txt, *Advertisement of Multiple Paths in BGP*.

- [Requirements on page 2875](#)
- [Overview on page 2875](#)
- [Configuration on page 2876](#)
- [Verification on page 2894](#)

#### Requirements

This example uses the following hardware and software components:

- Eight BGP-speaking devices.
- Five of the BGP-enabled devices do not necessarily need to be routers. For example, they can be EX Series Ethernet Switches.
- Three of the BGP-enabled devices are configured to send multiple paths or receive multiple paths (or both send and receive multiple paths). These three BGP-enabled devices must be M Series Multiservice Edge Routers, MX Series 3D Universal Edge Routers, or T Series Core Routers.
- The three routers must be running Junos OS Release 11.4 or later.

#### Overview

The following statements are used for configuring multiple paths to a destination:

```
[edit protocols bgp group group-name family family],
add-path {
  receive;
  send {
```



```

    path-count number;
    prefix-policy [ policy-names ];
  }
}

```

In this example, Router R5, Router R6, and Router R7 redistribute static routes into BGP. Router R1 and Router R4 are route reflectors. Router R2 and Router R3 are clients to Route Reflector R1. Router R8 is a client to Route Reflector R4.

Route reflection is optional when multiple-path advertisement is enabled in BGP.

With the **add-path send path-count 6** configuration, Router R1 is configured to send up to six paths (per destination) to Router R4.

With the **add-path receive** configuration, Router R4 is configured to receive multiple paths from Router R1.

With the **add-path send path-count 6** configuration, Router R4 is also configured to send up to six paths to Router R8.


With the **add-path receive** configuration, Router R8 is configured to receive multiple paths from Router R4.

The **add-path send prefix-policy allow\_199** policy configuration (along with the corresponding route filter) limits Router R4 to sending multiple paths for only the 199.1.1.1/32 route.

### Topology Diagram

Figure 73 on page 2876 shows the topology used in this example.

Figure 73: Advertisement of Multiple Paths in BGP

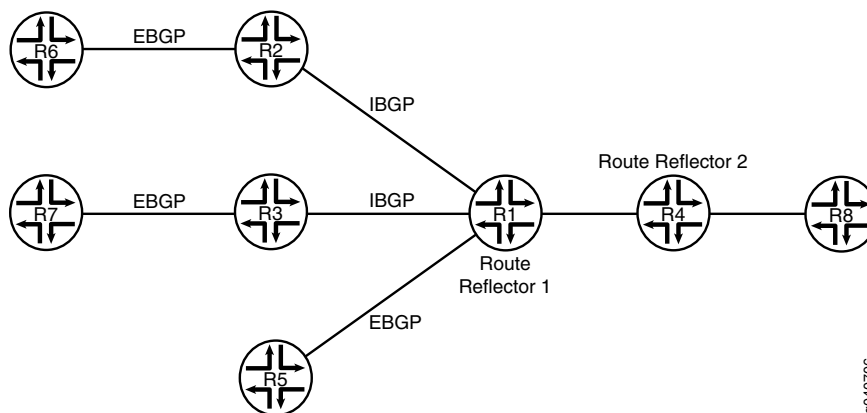

### Configuration

- [Configuring Router R1 on page 2879](#)
- [Configuring Router R2 on page 2882](#)
- [Configuring Router R3 on page 2884](#)
- [Configuring Router R4 on page 2886](#)
- [Configuring Router R5 on page 2888](#)



- [Configuring Router R6 on page 2890](#)
- [Configuring Router R7 on page 2891](#)
- [Configuring Router R8 on page 2893](#)
- [Results on page 2893](#)

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Router R1**

```

set interfaces fe-0/0/0 unit 12 family inet address 10.0.12.1/24
set interfaces fe-0/0/1 unit 13 family inet address 10.0.13.1/24
set interfaces fe-1/0/0 unit 14 family inet address 10.0.14.1/24
set interfaces fe-1/2/0 unit 15 family inet address 10.0.15.1/24
set interfaces lo0 unit 10 family inet address 10.0.0.10/32
set protocols bgp group rr type internal
set protocols bgp group rr local-address 10.0.0.10
set protocols bgp group rr cluster 10.0.0.10
set protocols bgp group rr neighbor 10.0.0.20
set protocols bgp group rr neighbor 10.0.0.30
set protocols bgp group e1 type external
set protocols bgp group e1 neighbor 10.0.15.2 local-address 10.0.15.1
set protocols bgp group e1 neighbor 10.0.15.2 peer-as 2
set protocols bgp group rr_rr type internal
set protocols bgp group rr_rr local-address 10.0.0.10
set protocols bgp group rr_rr neighbor 10.0.0.40 family inet unicast add-path send
  path-count 6
set protocols ospf area 0.0.0.0 interface lo0.10 passive
set protocols ospf area 0.0.0.0 interface fe-0/0/0.12
set protocols ospf area 0.0.0.0 interface fe-0/0/1.13
set protocols ospf area 0.0.0.0 interface fe-1/0/0.14
set protocols ospf area 0.0.0.0 interface fe-1/2/0.15
set routing-options router-id 10.0.0.10
set routing-options autonomous-system 1

```

**Router R2**

```

set interfaces fe-1/2/0 unit 21 family inet address 10.0.12.2/24
set interfaces fe-1/2/1 unit 26 family inet address 10.0.26.1/24
set interfaces lo0 unit 20 family inet address 10.0.0.20/32
set protocols bgp group rr type internal
set protocols bgp group rr local-address 10.0.0.20
set protocols bgp group rr neighbor 10.0.0.10 export set_nh_self
set protocols bgp group e1 type external
set protocols bgp group e1 neighbor 10.0.26.2 peer-as 2
set protocols ospf area 0.0.0.0 interface lo0.20 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.21
set protocols ospf area 0.0.0.0 interface fe-1/2/1.28
set policy-options policy-statement set_nh_self then next-hop self
set routing-options autonomous-system 1

```

**Router R3**

```

set interfaces fe-1/0/1 unit 31 family inet address 10.0.13.2/24
set interfaces fe-1/0/2 unit 37 family inet address 10.0.37.1/24
set interfaces lo0 unit 30 family inet address 10.0.0.30/32
set protocols bgp group rr type internal
set protocols bgp group rr local-address 10.0.0.30

```



```
set protocols bgp group rr neighbor 10.0.0.10 export set_nh_self
set protocols bgp group e1 type external
set protocols bgp group e1 neighbor 10.0.37.2 peer-as 2
set protocols ospf area 0.0.0.0 interface lo0.30 passive
set protocols ospf area 0.0.0.0 interface fe-1/0/1.31
set protocols ospf area 0.0.0.0 interface fe-1/0/2.37
set policy-options policy-statement set_nh_self then next-hop self
set routing-options autonomous-system 1
```

Router R4

```
set interfaces fe-1/2/0 unit 41 family inet address 10.0.14.2/24
set interfaces fe-1/2/1 unit 48 family inet address 10.0.48.1/24
set interfaces lo0 unit 40 family inet address 10.0.0.40/32
set protocols bgp group rr type internal
set protocols bgp group rr local-address 10.0.0.40
set protocols bgp group rr family inet unicast add-path receive
set protocols bgp group rr neighbor 10.0.0.10
set protocols bgp group rr_client type internal
set protocols bgp group rr_client local-address 10.0.0.40
set protocols bgp group rr_client cluster 10.0.0.40
set protocols bgp group rr_client neighbor 10.0.0.80 family inet unicast add-path send
  path-count 6
set protocols bgp group rr_client neighbor 10.0.0.80 family inet unicast add-path send
  prefix-policy allow_199
set protocols ospf area 0.0.0.0 interface fe-1/2/0.41
set protocols ospf area 0.0.0.0 interface lo0.40 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/1.48
set routing-options autonomous-system 1
set policy-options policy-statement allow_199 from route-filter 199.1.1.1/32 exact
set policy-options policy-statement allow_199 then accept
```

Router R5

```
set interfaces fe-1/2/0 unit 51 family inet address 10.0.15.2/24
set interfaces lo0 unit 50 family inet address 10.0.0.50/32
set protocols bgp group e1 type external
set protocols bgp group e1 neighbor 10.0.15.1 export s2b
set protocols bgp group e1 neighbor 10.0.15.1 peer-as 1
set policy-options policy-statement s2b from protocol static
set policy-options policy-statement s2b from protocol direct
set policy-options policy-statement s2b then as-path-expand 2
set policy-options policy-statement s2b then accept
set routing-options autonomous-system 2
set routing-options static route 199.1.1.1/32 reject
set routing-options static route 198.1.1.1/32 reject
```

Router R6

```
set interfaces fe-1/2/0 unit 62 family inet address 10.0.26.2/24
set interfaces lo0 unit 60 family inet address 10.0.0.60/32
set protocols bgp group e1 type external
set protocols bgp group e1 neighbor 10.0.26.1 export s2b
set protocols bgp group e1 neighbor 10.0.26.1 peer-as 1
set policy-options policy-statement s2b from protocol static
set policy-options policy-statement s2b from protocol direct
set policy-options policy-statement s2b then accept
set routing-options autonomous-system 2
set routing-options static route 199.1.1.1/32 reject
set routing-options static route 198.1.1.1/32 reject
```



**Router R7**

```

set interfaces fe-1/2/0 unit 73 family inet address 10.0.37.2/24
set interfaces lo0 unit 70 family inet address 10.0.0.70/32
set policy-options policy-statement s2b from protocol static
set policy-options policy-statement s2b from protocol direct
set policy-options policy-statement s2b then accept
set protocols bgp group e1 type external
set protocols bgp group e1 neighbor 10.0.37.1 export s2b
set protocols bgp group e1 neighbor 10.0.37.1 peer-as 1
set routing-options autonomous-system 2
set routing-options static route 199.1.1.1/32 reject

```

**Router R8**

```

set interfaces fe-1/2/0 unit 84 family inet address 10.0.48.2/24
set interfaces lo0 unit 80 family inet address 10.0.0.80/32
set protocols bgp group rr type internal
set protocols bgp group rr local-address 10.0.0.80
set protocols bgp group rr neighbor 10.0.0.40 family inet unicast add-path receive
set protocols ospf area 0.0.0.0 interface lo0.80 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.84
set routing-options autonomous-system 1

```

### *Configuring Router R1*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure Router R1:

1. Configure the interfaces to Router R2, Router R3, Router R4, and Router R5, and configure the loopback (lo0) interface.

```

[edit interfaces]
user@R1# set fe-0/0/0 unit 12 family inet address 10.0.12.1/24

user@R1# set fe-0/0/1 unit 13 family inet address 10.0.13.1/24

user@R1# set fe-1/0/0 unit 14 family inet address 10.0.14.1/24

user@R1# set fe-1/2/0 unit 15 family inet address 10.0.15.1/24

user@R1# set lo0 unit 10 family inet address 10.0.0.10/32

```

2. Configure BGP on the interfaces, and configure IBGP route reflection.

```

[edit protocols bgp]
user@R1# set group rr type internal
user@R1# set group rr local-address 10.0.0.10
user@R1# set group rr cluster 10.0.0.10
user@R1# set group rr neighbor 10.0.0.20
user@R1# set group rr neighbor 10.0.0.30

user@R1# set group rr_rr type internal
user@R1# set group rr_rr local-address 10.0.0.10

```



```
user@R1# set group e1 type external
user@R1# set group e1 neighbor 10.0.15.2 local-address 10.0.15.1
user@R1# set group e1 neighbor 10.0.15.2 peer-as 2
```

3. Configure Router R1 to send up to six paths to its neighbor, Router R4.

The destination of the paths can be any destination that Router R1 can reach through multiple paths.

```
[edit protocols bgp]
user@R1# set group rr_rr neighbor 10.0.0.40 family inet unicast add-path send
path-count 6
```

4. Configure OSPF on the interfaces.

```
[edit protocols ospf]
user@R1# set area 0.0.0.0 interface lo0.10 passive
user@R1# set area 0.0.0.0 interface fe-0/0/0.12
user@R1# set area 0.0.0.0 interface fe-0/0/1.13
user@R1# set area 0.0.0.0 interface fe-1/0/0.14
user@R1# set area 0.0.0.0 interface fe-1/2/0.15
```

5. Configure the router ID and the autonomous system number.

```
[edit routing-options]
user@R1# set router-id 10.0.0.10
user@R1# set autonomous-system 1
```

6. If you are done configuring the device, commit the configuration.

```
user@R1# commit
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-0/0/0 {
  unit 12 {
    family inet {
      address 10.0.12.1/24;
    }
  }
}
fe-0/0/1 {
  unit 13 {
    family inet {
      address 10.0.13.1/24;
    }
  }
}
fe-1/0/0 {
  unit 14 {
    family inet {
      address 10.0.14.1/24;
    }
  }
}
```



```

}
fe-1/2/0 {
  unit 15 {
    family inet {
      address 10.0.15.1/24;
    }
  }
}
lo0 {
  unit 10 {
    family inet {
      address 10.0.0.10/32;
    }
  }
}
}

user@R1# show protocols
bgp {
  group rr {
    type internal;
    local-address 10.0.0.10;
    cluster 10.0.0.10;
    neighbor 10.0.0.20;
    neighbor 10.0.0.30;
  }
  group e1 {
    type external;
    neighbor 10.0.15.2 {
      local-address 10.0.15.1;
      peer-as 2;
    }
  }
  group rr_rr {
    type internal;
    local-address 10.0.0.10;
    neighbor 10.0.0.40 {
      family inet {
        unicast {
          add-path {
            send {
              path-count 6;
            }
          }
        }
      }
    }
  }
}
}

ospf {
  area 0.0.0.0 {
    interface lo0.10 {
      passive;
    }
    interface fe-0/0/0.12;
    interface fe-0/0/1.13;
    interface fe-1/0/0.14;
  }
}

```



```
        interface fe-1/2/0.15;
    }
}
```

```
user@R1# show routing-options
router-id 10.0.0.10;
autonomous-system 1;
```

### *Configuring Router R2*

#### **Step-by-Step Procedure**

To configure Router R2:

1. Configure the loopback (lo0) interface and the interfaces to Router R6 and Router R1.

```
[edit interfaces]
```

```
user@R2# set fe-1/2/0 unit 21 family inet address 10.0.12.2/24
```

```
user@R2# set fe-1/2/1 unit 26 family inet address 10.0.26.1/24
```

```
user@R2# set lo0 unit 20 family inet address 10.0.0.20/32
```

2. Configure BGP and OSPF on Router R2's interfaces.

```
[edit protocols]
```

```
user@R2# set bgp group rr type internal
```

```
user@R2# set bgp group rr local-address 10.0.0.20
```

```
user@R2# set bgp group e1 type external
```

```
user@R2# set bgp group e1 neighbor 10.0.26.2 peer-as 2
```

```
user@R2# set ospf area 0.0.0.0 interface lo0.20 passive
```

```
user@R2# set ospf area 0.0.0.0 interface fe-1/2/0.21
```

```
user@R2# set ospf area 0.0.0.0 interface fe-1/2/1.28
```

3. For routes sent from Router R2 to Router R1, advertise Router R2 as the next hop, because Router R1 does not have a route to Router R6's address on the 10.0.26.0/24 network.

```
[edit]
```

```
user@R2# set policy-options policy-statement set_nh_self then next-hop self
```

```
user@R2# set protocols bgp group rr neighbor 10.0.0.10 export set_nh_self
```

4. Configure the autonomous system number.

```
[edit]
```

```
user@R2# set routing-options autonomous-system 1
```

5. If you are done configuring the device, commit the configuration.

```
user@R2# commit
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.



```
user@R2# show interfaces
fe-1/2/0 {
  unit 21 {
    family inet {
      address 10.0.12.2/24;
    }
  }
}
fe-1/2/1 {
  unit 26 {
    family inet {
      address 10.0.26.1/24;
    }
  }
}
lo0 {
  unit 20 {
    family inet {
      address 10.0.0.20/32;
    }
  }
}

user@R2# show policy-options
policy-statement set_nh_self {
  then {
    next-hop self;
  }
}

user@R2# show protocols
bgp {
  group rr {
    type internal;
    local-address 10.0.0.20;
    neighbor 10.0.0.10 {
      export set_nh_self;
    }
  }
  group e1 {
    type external;
    neighbor 10.0.26.2 {
      peer-as 2;
    }
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.20 {
      passive;
    }
    interface fe-1/2/0.21;
    interface fe-1/2/1.28;
  }
}

user@R2# show routing-options
```



```
autonomous-system 1;
```

### *Configuring Router R3*

#### **Step-by-Step Procedure**

To configure Router R3:

1. Configure the loopback (lo0) interface and the interfaces to Router R7 and Router R1.

```
[edit interfaces]
```

```
user@R3# set fe-1/0/1 unit 31 family inet address 10.0.13.2/24
```

```
user@R3# set fe-1/0/2 unit 37 family inet address 10.0.37.1/24
```

```
user@R3# set lo0 unit 30 family inet address 10.0.0.30/32
```

2. Configure BGP and OSPF on Router R3's interfaces.

```
[edit protocols]
```

```
user@R3# set bgp group rr type internal
```

```
user@R3# set bgp group rr local-address 10.0.0.30
```

```
user@R3# set bgp group e1 type external
```

```
user@R3# set bgp group e1 neighbor 10.0.37.2 peer-as 2
```

```
user@R3# set ospf area 0.0.0.0 interface lo0.30 passive
```

```
user@R3# set ospf area 0.0.0.0 interface fe-1/0/1.31
```

```
user@R3# set ospf area 0.0.0.0 interface fe-1/0/2.37
```

3. For routes sent from Router R3 to Router R1, advertise Router R3 as the next hop, because Router R1 does not have a route to Router R7's address on the 10.0.37.0/24 network.

```
[edit]
```

```
user@R3# set policy-options policy-statement set_nh_self then next-hop self
```

```
user@R3# set protocols bgp group rr neighbor 10.0.0.10 export set_nh_self
```

4. Configure the autonomous system number.

```
[edit]
```

```
user@R3# set routing-options autonomous-system 1
```

5. If you are done configuring the device, commit the configuration.

```
user@R3# commit
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R3# show interfaces
```

```
fe-1/0/1 {
```

```
  unit 31 {
```

```
    family inet {
```

```
      address 10.0.13.2/24;
```



```

    }
  }
}
fe-1/0/2 {
  unit 37 {
    family inet {
      address 10.0.37.1/24;
    }
  }
}
lo0 {
  unit 30 {
    family inet {
      address 10.0.0.30/32;
    }
  }
}

user@R3# show policy-options
policy-statement set_nh_self {
  then {
    next-hop self;
  }
}

user@R3# show protocols
bgp {
  group rr {
    type internal;
    local-address 10.0.0.30;
    neighbor 10.0.0.10 {
      export set_nh_self;
    }
  }
  group e1 {
    type external;
    neighbor 10.0.37.2 {
      peer-as 2;
    }
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.30 {
      passive;
    }
    interface fe-1/0/1.31;
    interface fe-1/0/2.37;
  }
}

user@R3# show routing-options
autonomous-system 1;

```



### **Configuring Router R4**

#### **Step-by-Step Procedure**

To configure Router R4:

1. Configure the interfaces to Router R1 and Router R8, and configure the loopback (lo0) interface.

```
[edit interfaces]
```

```
user@R4# set fe-1/2/0 unit 41 family inet address 10.0.14.2/24
```

```
user@R4# set fe-1/2/1 unit 48 family inet address 10.0.48.1/24
```

```
user@R4# set lo0 unit 40 family inet address 10.0.0.40/32
```

2. Configure BGP on the interfaces, and configure IBGP route reflection.

```
[edit protocols bgp]
```

```
user@R4# set group rr type internal
```

```
user@R4# set group rr local-address 10.0.0.40
```

```
user@R4# set group rr neighbor 10.0.0.10
```

```
user@R4# set group rr_client type internal
```

```
user@R4# set group rr_client local-address 10.0.0.40
```

```
user@R4# set group rr_client cluster 10.0.0.40
```

3. Configure Router R4 to send up to six paths to its neighbor, Router R8.

The destination of the paths can be any destination that Router R4 can reach through multiple paths.

```
[edit protocols bgp]
```

```
user@R4# set group rr_client neighbor 10.0.0.80 family inet unicast add-path send  
path-count 6
```

4. Configure Router R4 to receive multiple paths from its neighbor, Router R1.

The destination of the paths can be any destination that Router R1 can reach through multiple paths.

```
[edit protocols bgp]
```

```
user@R4# set group rr family inet unicast add-path receive
```

5. Configure OSPF on the interfaces.

```
[edit protocols ospf]
```

```
user@R4# set area 0.0.0.0 interface fe-1/2/0.41
```

```
user@R4# set area 0.0.0.0 interface lo0.40 passive
```

```
user@R4# set area 0.0.0.0 interface fe-1/2/1.48
```

6. Configure a policy that allows Router R4 to send Router R8 multiple paths to the 199.1.1.1/32 route.

Router R4 receives multiple paths for the 198.1.1.1/32 route and the 199.1.1.1/32 route. However, because of this policy, Router R4 only sends multiple paths for the 199.1.1.1/32 route.

```
[edit]
```



```

user@R4# set protocols bgp group rr_client neighbor 10.0.0.80 family inet unicast
add-path send prefix-policy allow_199
user@R4# set policy-options policy-statement allow_199 from route-filter 199.1.1.1/32
exact
user@R4# set policy-options policy-statement allow_199 then accept

```

7. Configure the autonomous system number.

```

[edit routing-options]
user@R4# set autonomous-system 1

```

8. If you are done configuring the device, commit the configuration.

```

user@R4# commit

```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R4# show interfaces
fe-1/2/0 {
  unit 41 {
    family inet {
      address 10.0.14.2/24;
    }
  }
}
fe-1/2/1 {
  unit 48 {
    family inet {
      address 10.0.48.1/24;
    }
  }
}
lo0 {
  unit 40 {
    family inet {
      address 10.0.0.40/32;
    }
  }
}

user@R4# show policy-options
policy-statement allow_199 {
  from {
    route-filter 199.1.1.1/32 exact;
  }
  then accept;
}

user@R4# show protocols
bgp {
  group rr {
    type internal;
    local-address 10.0.0.40;
    family inet {

```



```

        unicast {
            add-path {
                receive;
            }
        }
    }
    neighbor 10.0.0.10;
}

group rr_client {
    type internal;
    local-address 10.0.0.40;
    cluster 10.0.0.40;
    neighbor 10.0.0.80 {
        family inet {
            unicast {
                add-path {
                    send {
                        path-count 6;
                        prefix-policy allow_199;
                    }
                }
            }
        }
    }
}

ospf {
    area 0.0.0.0 {
        interface lo0.40 {
            passive;
        }
        interface fe-1/2/0.41;
        interface fe-1/2/1.48;
    }
}

user@R4# show routing-options
autonomous-system 1;
```

### Configuring Router R5

## Step-by-Step Procedure

To configure Router R5:

1. Configure the loopback (**lo0**) interface and the interface to Router R1.

[edit interfaces]

```
user@R5# set fe-1/2/0 unit 51 family inet address 10.0.15.2/24
```

```
user@R5# set lo0 unit 50 family inet address 10.0.0.50/32
```

2. Configure BGP on Router R5's interface.

[edit protocols]

```
user@R5# set bgp group e1 type external
```

```
user@R5# set bgp group e1 neighbor 10.0.15.1 peer-as 1
```



3. Create static routes for redistribution into BGP.

```
[edit]
user@R5# set routing-options static route 199.1.1.1/32 reject
user@R5# set routing-options static route 198.1.1.1/32 reject
```

4. Redistribute static and direct routes into BGP.

```
[edit]
user@R5# set protocols bgp group e1 neighbor 10.0.15.1 export s2b
user@R5# set policy-options policy-statement s2b from protocol static
user@R5# set policy-options policy-statement s2b from protocol direct
user@R5# set policy-options policy-statement s2b then as-path-expand 2
user@R5# set policy-options policy-statement s2b then accept
```

5. Configure the autonomous system number.

```
[edit]
user@R5# set routing-options autonomous-system 2
```

6. If you are done configuring the device, commit the configuration.

```
user@R5# commit
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R5# show interfaces
fe-1/2/0 {
  unit 51 {
    family inet {
      address 10.0.15.2/24;
    }
  }
}
lo0 {
  unit 50 {
    family inet {
      address 10.0.0.50/32;
    }
  }
}

user@R5# show policy-options
policy-statement s2b {
  from protocol [ static direct ];
  then {
    as-path-expand 2;
    accept;
  }
}

user@R5# show protocols
bgp {
  group e1 {
```



```
type external;
neighbor 10.0.15.1 {
  export s2b;
  peer-as 1;
}
}
}

user@R5# show routing-options
static {
  route 198.1.1.1/32 reject;
  route 199.1.1.1/32 reject;
}
autonomous-system 2;
```

### *Configuring Router R6*

#### **Step-by-Step Procedure**

To configure Router R6:

1. Configure the loopback (lo0) interface and the interface to Router R2.  
  
[edit interfaces]  
user@R6# set fe-1/2/0 unit 62 family inet address 10.0.26.2/24  
  
user@R6# set lo0 unit 60 family inet address 10.0.0.60/32
2. Configure BGP on Router R6's interface.  
  
[edit protocols]  
user@R6# set bgp group e1 type external  
user@R6# set bgp group e1 neighbor 10.0.26.1 peer-as 1
3. Create static routes for redistribution into BGP.  
  
[edit]  
user@R6# set routing-options static route 199.1.1.1/32 reject  
user@R6# set routing-options static route 198.1.1.1/32 reject
4. Redistribute static and direct routes from Router R6's routing table into BGP.  
  
[edit]  
user@R6# set protocols bgp group e1 neighbor 10.0.26.1 export s2b  
user@R6# set policy-options policy-statement s2b from protocol static  
user@R6# set policy-options policy-statement s2b from protocol direct  
user@R6# set policy-options policy-statement s2b then accept
5. Configure the autonomous system number.  
  
[edit]  
user@R6# set routing-options autonomous-system 2
6. If you are done configuring the device, commit the configuration.  
  
user@R6# commit

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output



does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R6# show interfaces
fe-1/2/0 {
  unit 62 {
    family inet {
      address 10.0.26.2/24;
    }
  }
}
lo0 {
  unit 60 {
    family inet {
      address 10.0.0.60/32;
    }
  }
}

user@R6# show policy-options
policy-statement s2b {
  from protocol [ static direct ];
  then accept;
}

user@R6# show protocols
bgp {
  group e1 {
    type external;
    neighbor 10.0.26.1 {
      export s2b;
      peer-as 1;
    }
  }
}

user@R6# show routing-options
static {
  route 198.1.1.1/32 reject;
  route 199.1.1.1/32 reject;
}
autonomous-system 2;

```

### *Configuring Router R7*

#### **Step-by-Step Procedure**

To configure Router R7:

1. Configure the loopback (**lo0**) interface and the interface to Router R3.

```
[edit interfaces]
```

```
user@R7# set fe-1/2/0 unit 73 family inet address 10.0.37.2/24
```

```
user@R7# set lo0 unit 70 family inet address 10.0.0.70/32
```

2. Configure BGP on Router R7's interface.

```
[edit protocols]
```

```
user@R7# set bgp group e1 type external
```



```
user@R7# set bgp group e1 neighbor 10.0.37.1 peer-as 1
```

3. Create a static route for redistribution into BGP.

```
[edit]
user@R7# set routing-options static route 199.1.1.1/32 reject
```

4. Redistribute static and direct routes from Router R7's routing table into BGP.

```
[edit]
user@R7# set protocols bgp group e1 neighbor 10.0.37.1 export s2b
user@R7# set policy-options policy-statement s2b from protocol static
user@R7# set policy-options policy-statement s2b from protocol direct
user@R7# set policy-options policy-statement s2b then accept
```

5. Configure the autonomous system number.

```
[edit]
user@R7# set routing-options autonomous-system 2
```

6. If you are done configuring the device, commit the configuration.

```
user@R7# commit
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R7# show interfaces
fe-1/2/0 {
  unit 73 {
    family inet {
      address 10.0.37.2/24;
    }
  }
}
lo0 {
  unit 70 {
    family inet {
      address 10.0.0.70/32;
    }
  }
}

user@R7# show policy-options
policy-statement s2b {
  from protocol [ static direct ];
  then accept;
}

user@R7# show protocols
bgp {
  group e1 {
    type external;
    neighbor 10.0.37.1 {
      export s2b;
      peer-as 1;
    }
  }
}
```



```

    }
  }
}

user@R7# show routing-options
static {
  route 199.1.1.1/32 reject;
}
autonomous-system 2;

```

### Configuring Router R8

#### Step-by-Step Procedure

To configure Router R8:

1. Configure the loopback (lo0) interface and the interface to Router R4.

```

[edit interfaces]
user@R8# set fe-1/2/0 unit 84 family inet address 10.0.48.2/24

```

```

user@R8# set lo0 unit 80 family inet address 10.0.0.80/32

```

2. Configure BGP and OSPF on Router R8's interface.

```

[edit protocols]
user@R8# set bgp group rr type internal
user@R8# set bgp group rr local-address 10.0.0.80

```

```

user@R8# set ospf area 0.0.0.0 interface lo0.80 passive
user@R8# set ospf area 0.0.0.0 interface fe-1/2/0.84

```

3. Configure Router R8 to receive multiple paths from its neighbor, Router R4.

The destination of the paths can be any destination that Router R4 can reach through multiple paths.

```

[edit protocols]
user@R8# set bgp group rr neighbor 10.0.0.40 family inet unicast add-path receive

```

4. Configure the autonomous system number.

```

[edit]
user@R8# set routing-options autonomous-system 1

```

5. If you are done configuring the device, commit the configuration.

```

user@R8# commit

```

### Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R8# show interfaces
fe-1/2/0 {
  unit 84 {
    family inet {
      address 10.0.48.2/24;

```



```
    }
  }
}
lo0 {
  unit 80 {
    family inet {
      address 10.0.0.80/32;
    }
  }
}

user@R8# show protocols
bgp {
  group rr {
    type internal;
    local-address 10.0.0.80;
    neighbor 10.0.0.40 {
      family inet {
        unicast {
          add-path {
            receive;
          }
        }
      }
    }
  }
}

ospf {
  area 0.0.0.0 {
    interface lo0.80 {
      passive;
    }
    interface fe-1/2/0.84;
  }
}

user@R8# show routing-options
autonomous-system 1;
```

### **Verification**

Confirm that the configuration is working properly.

- [Verifying That the BGP Peers Have the Ability to Send and Receive Multiple Paths on page 2895](#)
- [Verifying That Router R1 Is Advertising Multiple Paths on page 2895](#)
- [Verifying That Router R4 Is Receiving and Advertising Multiple Paths on page 2896](#)
- [Verifying That Router R8 Is Receiving Multiple Paths on page 2896](#)
- [Checking the Path ID on page 2897](#)



*Verifying That the BGP Peers Have the Ability to Send and Receive Multiple Paths*

**Purpose** Make sure that one or both of the following strings appear in the output of the **show bgp neighbor** command:

- NLRI's for which peer can receive multiple paths: inet-unicast
- NLRI's for which peer can send multiple paths: inet-unicast

**Action** user@R1> show bgp neighbor 10.0.0.40  
Peer: 10.0.0.40+179 AS 1 Local: 10.0.0.10+65237 AS 1  
Type: Internal State: Established Flags: <Sync>  
... NLRI's for which peer can receive multiple paths: inet-unicast  
...

user@R4> show bgp neighbor 10.0.0.10  
Peer: 10.0.0.10+65237 AS 1 Local: 10.0.0.40+179 AS 1  
Type: Internal State: Established Flags: <Sync>  
...  
NLRI's for which peer can send multiple paths: inet-unicast  
...

user@R4> show bgp neighbor 10.0.0.80  
Peer: 10.0.0.80+55416 AS 1 Local: 10.0.0.40+179 AS 1  
Type: Internal State: Established (route reflector client)Flags: <Sync>  
...  
NLRI's for which peer can receive multiple paths: inet-unicast  
...

user@R8> show bgp neighbor 10.0.0.40  
Peer: 10.0.0.40+179 AS 1 Local: 10.0.0.80+55416 AS 1  
Type: Internal State: Established Flags: <Sync>  
...  
NLRI's for which peer can send multiple paths: inet-unicast  
...

*Verifying That Router R1 Is Advertising Multiple Paths*

**Purpose** Make sure that multiple paths to the 198.1.1.1/32 destination and multiple paths to the 199.1.1.1/32 destination are advertised to Router R4.

**Action** user@R1> show route advertising-protocol bgp 10.0.0.40  
inet.0: 21 destinations, 25 routes (21 active, 0 holddown, 0 hidden)  

Prefix	Nexthop	MED	Lc1pref	AS path
* 10.0.0.50/32	10.0.15.2		100	2 2 I
* 10.0.0.60/32	10.0.0.20		100	2 I
* 10.0.0.70/32	10.0.0.30		100	2 I
* 198.1.1.1/32	10.0.0.20		100	2 I
	10.0.15.2		100	2 2 I
* 199.1.1.1/32	10.0.0.20		100	2 I
	10.0.0.30		100	2 I
	10.0.15.2		100	2 2 I
* 200.1.1.0/30	10.0.0.20		100	2 I

**Meaning** When you see one prefix and more than one next hop, it means that multiple paths are advertised to Router R4.



**Verifying That Router R4 Is Receiving and Advertising Multiple Paths**

**Purpose** Make sure that multiple paths to the 199.1.1.1/32 destination are received from Router R1 and advertised to Router R8. Make sure that multiple paths to the 198.1.1.1/32 destination are received from Router R1, but only one path to this destination is advertised to Router R8.

**Action** user@R4> **show route receive-protocol bgp 10.0.0.10**  
 inet.0: 19 destinations, 22 routes (19 active, 0 holddown, 0 hidden)

Prefix	Nexthop	MED	Lc1pref	AS path
* 10.0.0.50/32	10.0.15.2	100	100	2 2 I
* 10.0.0.60/32	10.0.0.20	100	100	2 I
* 10.0.0.70/32	10.0.0.30	100	100	2 I
* 198.1.1.1/32	10.0.0.20	100	100	2 I
	10.0.15.2	100	100	2 2 I
* 199.1.1.1/32	10.0.0.20	100	100	2 I
	10.0.0.30	100	100	2 I
	10.0.15.2	100	100	2 2 I
* 200.1.1.0/30	10.0.0.20	100	100	2 I

user@R4> **show route advertising-protocol bgp 10.0.0.80**  
 inet.0: 19 destinations, 22 routes (19 active, 0 holddown, 0 hidden)

Prefix	Nexthop	MED	Lc1pref	AS path
* 10.0.0.50/32	10.0.15.2	100	100	2 2 I
* 10.0.0.60/32	10.0.0.20	100	100	2 I
* 10.0.0.70/32	10.0.0.30	100	100	2 I
* 198.1.1.1/32	10.0.0.20	100	100	2 I
* 199.1.1.1/32	10.0.0.20	100	100	2 I
	10.0.0.30	100	100	2 I
	10.0.15.2	100	100	2 2 I
* 200.1.1.0/30	10.0.0.20	100	100	2 I

**Meaning** The **show route receive-protocol** command shows that Router R4 receives two paths to the 198.1.1.1/32 destination and three paths to the 199.1.1.1/32 destination. The **show route advertising-protocol** command shows that Router R4 advertises only one path to the 198.1.1.1/32 destination and advertises all three paths to the 199.1.1.1/32 destination.

Because of the prefix policy that is applied to Router R4, Router R4 does not advertise multiple paths to the 198.1.1.1/32 destination. Router R4 advertises only one path to the 198.1.1.1/32 destination even though it receives multiple paths to this destination.

**Verifying That Router R8 Is Receiving Multiple Paths**

**Purpose** Make sure that Router R8 receives multiple paths to the 199.1.1.1/32 destination through Router R4. Make sure that Router R8 receives only one path to the 198.1.1.1/32 destination through Router R4.



**Action** user@R8> show route receive-protocol bgp 10.0.0.40  
 inet.0: 18 destinations, 20 routes (18 active, 0 holddown, 0 hidden)

Prefix	Nexthop	MED	Lclpref	AS path
* 10.0.0.50/32	10.0.15.2		100	2 2 I
* 10.0.0.60/32	10.0.0.20		100	2 I
* 10.0.0.70/32	10.0.0.30		100	2 I
* 198.1.1.1/32	10.0.0.20		100	2 I
* 199.1.1.1/32	10.0.0.20		100	2 I
	10.0.0.30		100	2 I
	10.0.15.2		100	2 2 I
* 200.1.1.0/30	10.0.0.20		100	2 I

### *Checking the Path ID*

**Purpose** On the downstream devices, Router R4 and Router R8, verify that a path ID uniquely identifies the path. Look for the **Addpath Path ID:** string.



**Action** user@R4> show route 199.1.1.1/32 detail

```
inet.0: 18 destinations, 20 routes (18 active, 0 holddown, 0 hidden)
199.1.1.1/32 (3 entries, 3 announced)
  *BGP Preference: 170/-101
    Next hop type: Indirect
    Next-hop reference count: 9
    Source: 10.0.0.10
    Next hop type: Router, Next hop index: 676
    Next hop: 10.0.14.1 via lt-1/2/0.41, selected
    Protocol next hop: 10.0.0.20
    Indirect next hop: 92041c8 262146
    State: <Active Int Ext>
    Local AS: 1 Peer AS: 1
    Age: 1:44:37 Metric2: 2
    Task: BGP_1.10.0.0.10+65237
    Announcement bits (3): 2-KRT 3-BGP RT Background 4-Resolve tree

1
  AS path: 2 I (Originator) Cluster list: 10.0.0.10
  AS path: Originator ID: 10.0.0.20
  Accepted
  Localpref: 100
  Router ID: 10.0.0.10
  Addpath Path ID: 1
  *BGP Preference: 170/-101
    Next hop type: Indirect
    Next-hop reference count: 4
    Source: 10.0.0.10
    Next hop type: Router, Next hop index: 676
    Next hop: 10.0.14.1 via lt-1/2/0.41, selected
    Protocol next hop: 10.0.0.30
    Indirect next hop: 92042ac 262151
    State: <NotBest Int Ext>
    Inactive reason: Not Best in its group - Router ID
    Local AS: 1 Peer AS: 1
    Age: 1:44:37 Metric2: 2
    Task: BGP_1.10.0.0.10+65237
    Announcement bits (1): 3-BGP RT Background
    AS path: 2 I (Originator) Cluster list: 10.0.0.10
    AS path: Originator ID: 10.0.0.30
    Accepted
    Localpref: 100
    Router ID: 10.0.0.10
    Addpath Path ID: 2
  *BGP Preference: 170/-101
    Next hop type: Indirect
    Next-hop reference count: 4
    Source: 10.0.0.10
    Next hop type: Router, Next hop index: 676
    Next hop: 10.0.14.1 via lt-1/2/0.41, selected
    Protocol next hop: 10.0.15.2
    Indirect next hop: 92040e4 262150
    State: <Int Ext>
    Inactive reason: AS path
    Local AS: 1 Peer AS: 1
    Age: 1:44:37 Metric2: 2
    Task: BGP_1.10.0.0.10+65237
    Announcement bits (1): 3-BGP RT Background
    AS path: 2 2 I
    Accepted
    Localpref: 100
```



```
Router ID: 10.0.0.10
Addpath Path ID: 3
```

```
user@R8> show route 199.1.1.1/32 detail
```

```
inet.0: 17 destinations, 19 routes (17 active, 0 holddown, 0 hidden)
199.1.1.1/32 (3 entries, 1 announced)
*BGP Preference: 170/-101
  Next hop type: Indirect
  Next-hop reference count: 9
  Source: 10.0.0.40
  Next hop type: Router, Next hop index: 1045
  Next hop: 10.0.48.1 via lt-1/2/0.84, selected
  Protocol next hop: 10.0.0.20
  Indirect next hop: 91fc0e4 262148
  State: <Active Int Ext>
  Local AS: 1 Peer AS: 1
  Age: 1:56:51 Metric2: 3
  Task: BGP_1.10.0.0.40+179
  Announcement bits (2): 2-KRT 4-Resolve tree 1
  AS path: 2 I (Originator) Cluster list: 10.0.0.40 10.0.0.10
  AS path: Originator ID: 10.0.0.20
  Accepted
  Localpref: 100
  Router ID: 10.0.0.40
  Addpath Path ID: 1
BGP Preference: 170/-101
  Next hop type: Indirect
  Next-hop reference count: 4
  Source: 10.0.0.40
  Next hop type: Router, Next hop index: 1045
  Next hop: 10.0.48.1 via lt-1/2/0.84, selected
  Protocol next hop: 10.0.0.30
  Indirect next hop: 91fc1c8 262152
  State: <NotBest Int Ext>
  Inactive reason: Not Best in its group - Router ID
  Local AS: 1 Peer AS: 1
  Age: 1:56:51 Metric2: 3
  Task: BGP_1.10.0.0.40+179
  AS path: 2 I (Originator) Cluster list: 10.0.0.40 10.0.0.10
  AS path: Originator ID: 10.0.0.30
  Accepted
  Localpref: 100
  Router ID: 10.0.0.40
  Addpath Path ID: 2
BGP Preference: 170/-101
  Next hop type: Indirect
  Next-hop reference count: 4
  Source: 10.0.0.40
  Next hop type: Router, Next hop index: 1045
  Next hop: 10.0.48.1 via lt-1/2/0.84, selected
  Protocol next hop: 10.0.15.2
  Indirect next hop: 91fc2ac 262153
  State: <Int Ext>
  Inactive reason: AS path
  Local AS: 1 Peer AS: 1
  Age: 1:56:51 Metric2: 3
  Task: BGP_1.10.0.0.40+179
  AS path: 2 2 I (Originator) Cluster list: 10.0.0.40
  AS path: Originator ID: 10.0.0.10
  Accepted
```



Localpref: 100  
Router ID: 10.0.0.40  
Addpath Path ID: 3

- Related Documentation**
- [Understanding External BGP Peering Sessions on page 2643](#)
  - [BGP Configuration Overview](#)

---

## IBGP Scaling Configuration

---

- [Example: Configuring BGP Route Reflectors on page 2900](#)
- [Example: Configuring BGP Confederations on page 2917](#)

### Example: Configuring BGP Route Reflectors

- [Understanding BGP Route Reflectors on page 2900](#)
- [Example: Configuring a Route Reflector on page 2902](#)

---

#### Understanding BGP Route Reflectors

---

Because of the internal BGP (IBGP) full-mesh requirement, most networks use route reflectors to simplify configuration. The formula to compute the number of sessions required for a full mesh is  $v * (v - 1) / 2$ , where  $v$  is the number of BGP-enabled devices. The full-mesh model does not scale well. Using a route reflector, you group routers into clusters, which are identified by numeric identifiers unique to the autonomous system (AS). Within the cluster, you must configure a BGP session from a single router (the route reflector) to each internal peer. With this configuration, the IBGP full-mesh requirement is met.

To use route reflection in an AS, you designate one or more routers as a route reflector—typically, one per point of presence (POP). Route reflectors have the special BGP ability to readvertise routes learned from an internal peer to other internal peers. So rather than requiring all internal peers to be fully meshed with each other, route reflection requires only that the route reflector be fully meshed with all internal peers. The route reflector and all of its internal peers form a cluster, as shown in [Figure 74 on page 2901](#).



**NOTE:** For some Juniper Networks devices, you must have an Advanced BGP Feature license installed on each device that uses a route reflector. For license details, see the *Junos OS Initial Configuration Guide for Security Devices*.

---



Figure 74: Simple Route Reflector Topology (One Cluster)

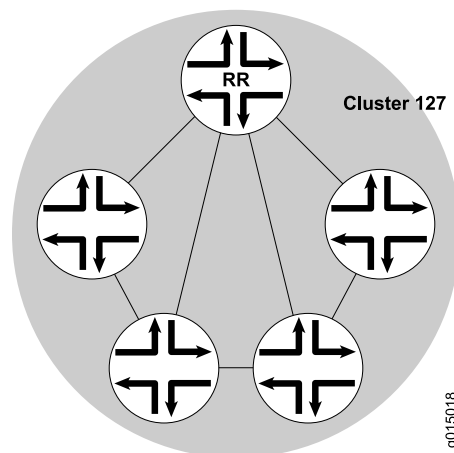


Figure 74 on page 2901 shows Router RR configured as the route reflector for Cluster 127. The other routers are designated internal peers within the cluster. BGP routes are advertised to Router RR by any of the internal peers. RR then readvertises those routes to all other peers within the cluster.

You can configure multiple clusters and link them by configuring a full mesh of route reflectors (see Figure 75 on page 2901).

Figure 75: Basic Route Reflection (Multiple Clusters)


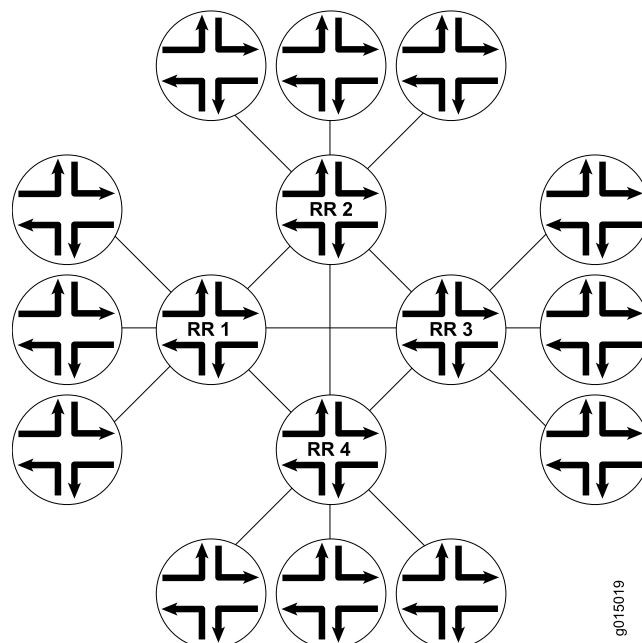


Figure 75 on page 2901 shows Route Reflectors RR 1, RR 2, RR 3, and RR 4 as fully meshed internal peers. When a router advertises a route to RR 1, RR 1 readvertises the route to the other route reflectors, which, in turn, readvertise the route to the remaining routers within the AS. Route reflection allows the route to be propagated throughout the AS without the scaling problems created by the full mesh requirement.



However, as clusters become large, a full mesh with a route reflector becomes difficult to scale, as does a full mesh between route reflectors. To help offset this problem, you can group clusters of routers together into clusters of clusters for hierarchical route reflection (see [Figure 76 on page 2902](#)).

**Figure 76: Hierarchical Route Reflection (Clusters of Clusters)**

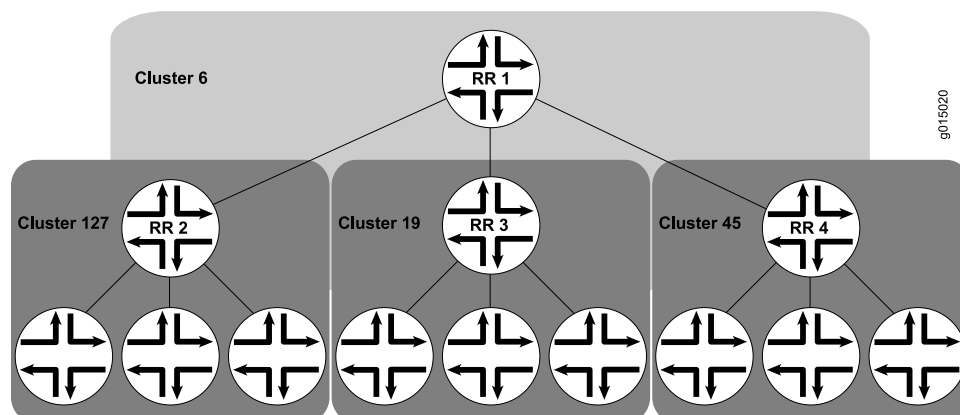

[Figure 76 on page 2902](#) shows RR 2, RR 3, and RR 4 as the route reflectors for Clusters 127, 19, and 45, respectively. Rather than fully mesh those route reflectors, the network administrator has configured them as part of another cluster (Cluster 6) for which RR 1 is the route reflector. When a router advertises a route to RR 2, RR 2 readvertises the route to all the routers within its own cluster, and then readvertises the route to RR 1. RR 1 readvertises the route to the routers in its cluster, and those routers propagate the route down through their clusters.

### Example: Configuring a Route Reflector

This example shows how to configure a route reflector.

- [Requirements on page 2902](#)
- [Overview on page 2902](#)
- [Configuration on page 2904](#)
- [Verification on page 2912](#)

#### Requirements

No special configuration beyond device initialization is required before you configure this example.

#### Overview

Generally, internal BGP (IBGP)-enabled devices need to be fully meshed, because IBGP does not readvertise updates to other IBGP-enabled devices. The full mesh is a logical mesh achieved through configuration of multiple **neighbor** statements on each IBGP-enabled device. The full mesh is not necessarily a physical full mesh. Maintaining a full mesh (logical or physical) does not scale well in large deployments.



Figure 77 on page 2904 shows an IBGP network with Device A acting as a route reflector. Device B and Device C are clients of the route reflector. Device D and Device E are outside the cluster, so they are nonclients of the route reflector.

On Device A (the route reflector), you must form peer relationships with all of the IBGP-enabled devices by including the **neighbor** statement for the clients (Device B and Device C) and the nonclients (Device D and Device E). You must also include the **cluster** statement and a cluster identifier. The cluster identifier can be any 32-bit value. This example uses the loopback interface IP address of the route reflector.

On Device B and Device C, the route reflector clients, you only need one **neighbor** statement that forms a peer relationship with the route reflector, Device A.


On Device D and Device E, the nonclients, you need a **neighbor** statement for each nonclient device (D-to-E and E-to-D). You also need a **neighbor** statement for the route reflector (D-to-A and E-to-A). Device D and Device E do not need **neighbor** statements for the client devices (Device B and Device C).



**TIP:** Device D and Device E are considered to be nonclients because they have explicitly configured peer relationships with each other. To make them RRroute reflector clients, remove the **neighbor 192.168.5.5** statement from the configuration on Device D, and remove the **neighbor 192.168.0.1** statement from the configuration on Device E.



Figure 77: IBGP Network Using a Route Reflector

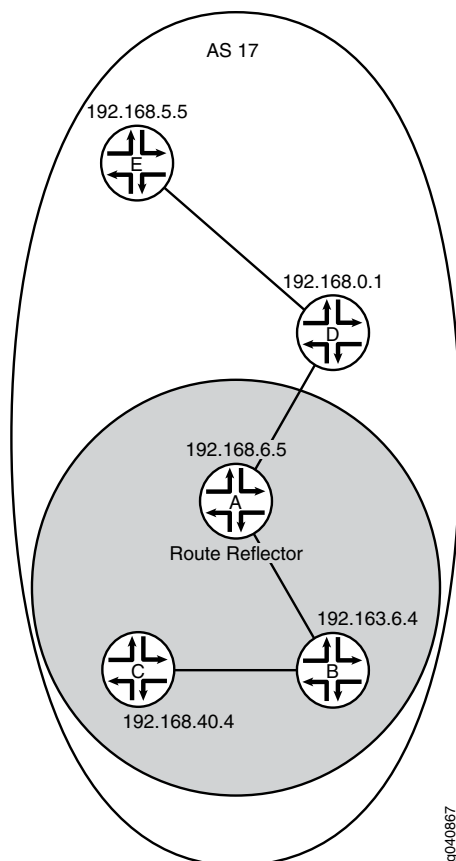**Configuration**

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device A**

```

set interfaces fe-0/0/0 unit 1 description to-B
set interfaces fe-0/0/0 unit 1 family inet address 10.10.10.1/30
set interfaces fe-0/0/1 unit 3 description to-D
set interfaces fe-0/0/1 unit 3 family inet address 10.10.10.9/30
set interfaces lo0 unit 1 family inet address 192.168.6.5/32
set protocols bgp group internal-peers type internal
set protocols bgp group internal-peers local-address 192.168.6.5
set protocols bgp group internal-peers export send-ospf
set protocols bgp group internal-peers cluster 192.168.6.5
set protocols bgp group internal-peers neighbor 192.163.6.4
set protocols bgp group internal-peers neighbor 192.168.40.4
set protocols bgp group internal-peers neighbor 192.168.0.1
set protocols bgp group internal-peers neighbor 192.168.5.5
set protocols ospf area 0.0.0.0 interface lo0.1 passive
set protocols ospf area 0.0.0.0 interface fe-0/0/0.1
set protocols ospf area 0.0.0.0 interface fe-0/0/1.3
set policy-options policy-statement send-ospf term 2 from protocol ospf

```



```

set policy-options policy-statement send-ospf term 2 then accept
set routing-options router-id 192.168.6.5
set routing-options autonomous-system 17

```

**Device B**

```

set interfaces fe-0/0/0 unit 2 description to-A
set interfaces fe-0/0/0 unit 2 family inet address 10.10.10.2/30
set interfaces fe-0/0/1 unit 5 description to-C
set interfaces fe-0/0/1 unit 5 family inet address 10.10.10.5/30
set interfaces lo0 unit 2 family inet address 192.163.6.4/32
set protocols bgp group internal-peers type internal
set protocols bgp group internal-peers local-address 192.163.6.4
set protocols bgp group internal-peers export send-ospf
set protocols bgp group internal-peers neighbor 192.168.6.5
set protocols ospf area 0.0.0.0 interface lo0.2 passive
set protocols ospf area 0.0.0.0 interface fe-0/0/0.2
set protocols ospf area 0.0.0.0 interface fe-0/0/1.5
set policy-options policy-statement send-ospf term 2 from protocol ospf
set policy-options policy-statement send-ospf term 2 then accept
set routing-options router-id 192.163.6.4
set routing-options autonomous-system 17

```

**Device C**

```

set interfaces fe-0/0/0 unit 6 description to-B
set interfaces fe-0/0/0 unit 6 family inet address 10.10.10.6/30
set interfaces lo0 unit 3 family inet address 192.168.40.4/32
set protocols bgp group internal-peers type internal
set protocols bgp group internal-peers local-address 192.168.40.4
set protocols bgp group internal-peers export send-ospf
set protocols bgp group internal-peers neighbor 192.168.6.5
set protocols ospf area 0.0.0.0 interface lo0.3 passive
set protocols ospf area 0.0.0.0 interface fe-0/0/0.6
set policy-options policy-statement send-ospf term 2 from protocol ospf
set policy-options policy-statement send-ospf term 2 then accept
set routing-options router-id 192.168.40.4
set routing-options autonomous-system 17

```

**Device D**

```

set interfaces fe-0/0/0 unit 4 description to-A
set interfaces fe-0/0/0 unit 4 family inet address 10.10.10.10/30
set interfaces fe-0/0/1 unit 7 description to-E
set interfaces fe-0/0/1 unit 7 family inet address 10.10.10.13/30
set interfaces lo0 unit 4 family inet address 192.168.0.1/32
set protocols bgp group internal-peers type internal
set protocols bgp group internal-peers local-address 192.168.0.1
set protocols bgp group internal-peers export send-ospf
set protocols bgp group internal-peers neighbor 192.168.6.5
set protocols bgp group internal-peers neighbor 192.168.5.5
set protocols ospf area 0.0.0.0 interface lo0.4 passive
set protocols ospf area 0.0.0.0 interface fe-0/0/0.4
set protocols ospf area 0.0.0.0 interface fe-0/0/1.7
set policy-options policy-statement send-ospf term 2 from protocol ospf
set policy-options policy-statement send-ospf term 2 then accept
set routing-options router-id 192.168.0.1
set routing-options autonomous-system 17

```

**Device E**

```

set interfaces fe-0/0/0 unit 8 description to-D
set interfaces fe-0/0/0 unit 8 family inet address 10.10.10.14/30

```



```
set interfaces lo0 unit 5 family inet address 192.168.5.5/32
set protocols bgp group internal-peers type internal
set protocols bgp group internal-peers local-address 192.168.5.5
set protocols bgp group internal-peers export send-ospf
set protocols bgp group internal-peers neighbor 192.168.0.1
set protocols bgp group internal-peers neighbor 192.168.6.5
set protocols ospf area 0.0.0.0 interface lo0.5 passive
set protocols ospf area 0.0.0.0 interface fe-0/0/0.8
set policy-options policy-statement send-ospf term 2 from protocol ospf
set policy-options policy-statement send-ospf term 2 then accept
set routing-options router-id 192.168.5.5
set routing-options autonomous-system 17
```

### *Configuring the Route Reflector*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure IBGP in the network using Juniper Networks Device A as a route reflector:

1. Configure the interfaces.

```
[edit interfaces]
user@A# set fe-0/0/0 unit 1 description to-B
user@A# set fe-0/0/0 unit 1 family inet address 10.10.1/30
user@A# set fe-0/0/1 unit 3 description to-D
user@A# set fe-0/0/1 unit 3 family inet address 10.10.9/30
user@A# set lo0 unit 1 family inet address 192.168.6.5/32
```

2. Configure BGP, including the cluster identifier and neighbor relationships with all IBGP-enabled devices in the autonomous system (AS).

Also apply the policy that redistributes OSPF routes into BGP.

```
[edit protocols bgp group internal-peers]
user@A# set type internal
user@A# set local-address 192.168.6.5
user@A# set export send-ospf
user@A# set cluster 192.168.6.5
user@A# set neighbor 192.163.6.4
user@A# set neighbor 192.168.40.4
user@A# set neighbor 192.168.0.1
user@A# set neighbor 192.168.5.5
```

3. Configure static routing or an interior gateway protocol (IGP).

This example uses OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@A# set interface lo0.1 passive
user@A# set interface fe-0/0/0.1
user@A# set interface fe-0/0/1.3
```

4. Configure the policy that redistributes OSPF routes into BGP.

```
[edit policy-options policy-statement send-ospf term 2]
user@A# set from protocol ospf
user@A# set then accept
```



5. Configure the router ID and the autonomous system (AS) number.

```
[edit routing-options]
user@A# set router-id 192.168.6.5
user@A# set autonomous-system 17
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@A# show interfaces
fe-0/0/0 {
  unit 1 {
    description to-B;
    family inet {
      address 10.10.10.1/30;
    }
  }
}
fe-0/0/1 {
  unit 3 {
    description to-D;
    family inet {
      address 10.10.10.9/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 192.168.6.5/32;
    }
  }
}

user@A# show protocols
bgp {
  group internal-peers {
    type internal;
    local-address 192.168.6.5;
    export send-ospf;
    cluster 192.168.6.5;
    neighbor 192.163.6.4;
    neighbor 192.168.40.4;
    neighbor 192.168.0.1;
    neighbor 192.168.5.5;
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.1 {
      passive;
    }
    interface fe-0/0/0.1;
    interface fe-0/0/1.3;
```



```

    }
  }

user@A# show policy-options
policy-statement send-ospf {
  term 2 {
    from protocol ospf;
    then accept;
  }
}

user@A# show routing-options
router-id 192.168.6.5;
autonomous-system 17;

```

If you are done configuring the device, enter **commit** from configuration mode.



**NOTE:** Repeat these steps for each nonclient BGP peer within the cluster that you are configuring, if the other nonclient devices are from Juniper Networks. Otherwise, consult the device's documentation for instructions.

### Configuring Client Peers

#### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure client peers:

1. Configure the interfaces.

```

[edit interfaces]
user@B# set fe-0/0/0 unit 2 description to-A
user@B# set fe-0/0/0 unit 2 family inet address 10.10.10.2/30
user@B# set fe-0/0/1 unit 5 description to-C
user@B# set fe-0/0/1 unit 5 family inet address 10.10.10.5/30
user@B# set lo0 unit 2 family inet address 192.163.6.4/32

```

2. Configure the BGP neighbor relationship with the route reflector.

Also apply the policy that redistributes OSPF routes into BGP.

```

[edit protocols bgp group internal-peers]
user@B# set type internal
user@B# set local-address 192.163.6.4
user@B# set export send-ospf
user@B# set neighbor 192.168.6.5

```

3. Configure OSPF.

```

[edit protocols ospf area 0.0.0.0]
user@B# set interface lo0.2 passive
user@B# set interface fe-0/0/0.2
user@B# set interface fe-0/0/1.5

```

4. Configure the policy that redistributes OSPF routes into BGP.



```
[edit policy-options policy-statement send-ospf term 2]
user@B# set from protocol ospf
user@B# set then accept
```

5. Configure the router ID and the AS number.

```
[edit routing-options]
user@B# set router-id 192.163.6.4
user@B# set autonomous-system 17
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@B# show interfaces
fe-0/0/0 {
  unit 2 {
    description to-A;
    family inet {
      address 10.10.10.2/30;
    }
  }
}
fe-0/0/1 {
  unit 5 {
    description to-C;
    family inet {
      address 10.10.10.5/30;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 192.163.6.4/32;
    }
  }
}

user@B# show protocols
bgp {
  group internal-peers {
    type internal;
    local-address 192.163.6.4;
    export send-ospf;
    neighbor 192.168.6.5;
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.2 {
      passive;
    }
    interface fe-0/0/0.2;
    interface fe-0/0/1.5;
```



```

    }
  }

user@B# show policy-options
policy-statement send-ospf {
  term 2 {
    from protocol ospf;
    then accept;
  }
}

user@B# show routing-options
router-id 192.163.6.4;
autonomous-system 17;

```

If you are done configuring the device, enter **commit** from configuration mode.



**NOTE:** Repeat these steps for each client BGP peer within the cluster that you are configuring if the other client devices are from Juniper Networks. Otherwise, consult the device's documentation for instructions.

### Configuring Nonclient Peers

#### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure nonclient peers:

1. Configure the interfaces.

```

[edit interfaces]
user@D# set fe-0/0/0 unit 4 description to-A
user@D# set fe-0/0/0 unit 4 family inet address 10.10.10.10/30
user@D# set fe-0/0/1 unit 7 description to-E
user@D# set fe-0/0/1 unit 7 family inet address 10.10.10.13/30
user@D# set lo0 unit 4 family inet address 192.168.0.1/32

```

2. Configure the BGP neighbor relationships with the RRroute reflector and with the other nonclient peers.

Also apply the policy that redistributes OSPF routes into BGP.

```

[edit protocols bgp group internal-peers]
user@D# set type internal
user@D# set local-address 192.168.0.1
user@D# set export send-ospf
user@D# set neighbor 192.168.6.5
user@D# set neighbor 192.168.5.5

```

3. Configure OSPF.

```

[edit protocols ospf area 0.0.0.0]
user@D# set interface lo0.4 passive
user@D# set interface fe-0/0/0.4

```



```
user@D# set interface fe-0/0/1.7
```

4. Configure the policy that redistributes OSPF routes into BGP.

```
[edit policy-options policy-statement send-ospf term 2]
user@D# set from protocol ospf
user@D# set then accept
```

5. Configure the router ID and the AS number.

```
[edit routing-options]
user@D# set router-id 192.168.0.1
user@D# set autonomous-system 17
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@D# show interfaces
fe-0/0/0 {
  unit 4 {
    description to-A;
    family inet {
      address 10.10.10.10/30;
    }
  }
}
fe-0/0/1 {
  unit 7 {
    description to-E;
    family inet {
      address 10.10.10.13/30;
    }
  }
}
lo0 {
  unit 4 {
    family inet {
      address 192.168.0.1/32;
    }
  }
}
```

```
user@D# show protocols
bgp {
  group internal-peers {
    type internal;
    local-address 192.168.0.1;
    export send-ospf;
    neighbor 192.168.6.5;
    neighbor 192.168.5.5;
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.4 {
```



```
        passive;
    }
    interface fe-0/0/0.4;
    interface fe-0/0/1.7;
}
}

user@D# show policy-options
policy-statement send-ospf {
    term 2 {
        from protocol ospf;
        then accept;
    }
}

user@D# show routing-options
router-id 192.168.0.1;
autonomous-system 17;
```

If you are done configuring the device, enter **commit** from configuration mode.



**NOTE:** Repeat these steps for each nonclient BGP peer within the cluster that you are configuring if the other nonclient devices are from Juniper Networks. Otherwise, consult the device's documentation for instructions.

### **Verification**

Confirm that the configuration is working properly.

- [Verifying BGP Neighbors on page 2912](#)
- [Verifying BGP Groups on page 2915](#)
- [Verifying BGP Summary Information on page 2915](#)
- [Verifying Routing Table Information on page 2915](#)

### **Verifying BGP Neighbors**

**Purpose** Verify that BGP is running on configured interfaces and that the BGP session is established for each neighbor address.

**Action** From operational mode, enter the **show bgp neighbor** command.

```
user@A> show bgp neighbor
Peer: 192.163.6.4+179 AS 17    Local: 192.168.6.5+62857 AS 17
  Type: Internal    State: Established (route reflector client)Flags: <Sync>
  Last State: OpenConfirm    Last Event: RecvKeepAlive
  Last Error: None
  Export: [ send-ospf ]
  Options: <Preference LocalAddress Cluster Refresh>
  Local Address: 192.168.6.5 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 192.163.6.4    Local ID: 192.168.6.5    Active Holdtime: 90
  Keepalive Interval: 30    Peer index: 0
  BFD: disabled, down
```



```

NLRI for restart configured on peer: inet-unicast
NLRI advertised by peer: inet-unicast
NLRI for this session: inet-unicast
Peer supports Refresh capability (2)
Restart time configured on the peer: 120
Stale routes from peer are kept for: 300
Restart time requested by this peer: 120
NLRI that peer supports restart for: inet-unicast
NLRI that restart is negotiated for: inet-unicast
NLRI of received end-of-rib markers: inet-unicast
NLRI of all end-of-rib markers sent: inet-unicast
Peer supports 4 byte AS extension (peer-as 17)
Peer does not support Addpath
Table inet.0 Bit: 10000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:          0
  Received prefixes:        6
  Accepted prefixes:        1
  Suppressed due to damping: 0
  Advertised prefixes:      6
Last traffic (seconds): Received 5    Sent 3    Checked 19
Input messages: Total 2961    Updates 7    Refreshes 0    Octets 56480
Output messages: Total 2945    Updates 6    Refreshes 0    Octets 56235
Output Queue[0]: 0

Peer: 192.168.0.1+179 AS 17    Local: 192.168.6.5+60068 AS 17
Type: Internal    State: Established (route reflector client)Flags: <Sync>
Last State: OpenConfirm    Last Event: RecvKeepAlive
Last Error: None
Export: [ send-ospf ]
Options: <Preference LocalAddress Cluster Refresh>
Local Address: 192.168.6.5 Holdtime: 90 Preference: 170
Number of flaps: 0
Peer ID: 192.168.0.1    Local ID: 192.168.6.5    Active Holdtime: 90
Keepalive Interval: 30    Peer index: 3
BFD: disabled, down
NLRI for restart configured on peer: inet-unicast
NLRI advertised by peer: inet-unicast
NLRI for this session: inet-unicast
Peer supports Refresh capability (2)
Restart time configured on the peer: 120
Stale routes from peer are kept for: 300
Restart time requested by this peer: 120
NLRI that peer supports restart for: inet-unicast
NLRI that restart is negotiated for: inet-unicast
NLRI of received end-of-rib markers: inet-unicast
NLRI of all end-of-rib markers sent: inet-unicast
Peer supports 4 byte AS extension (peer-as 17)
Peer does not support Addpath
Table inet.0 Bit: 10000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:          0
  Received prefixes:        6
  Accepted prefixes:        1
  Suppressed due to damping: 0
  Advertised prefixes:      6
Last traffic (seconds): Received 18    Sent 20    Checked 12
Input messages: Total 15    Updates 5    Refreshes 0    Octets 447
Output messages: Total 554    Updates 4    Refreshes 0    Octets 32307

```



Output Queue[0]: 0

```

Peer: 192.168.5.5+57458 AS 17 Local: 192.168.6.5+179 AS 17
Type: Internal State: Established (route reflector client)Flags: <Sync>
Last State: OpenConfirm Last Event: RecvKeepAlive
Last Error: None
Export: [ send-ospf ]
Options: <Preference LocalAddress Cluster Refresh>
Local Address: 192.168.6.5 Holdtime: 90 Preference: 170
Number of flaps: 0
Peer ID: 192.168.5.5 Local ID: 192.168.6.5 Active Holdtime: 90
Keepalive Interval: 30 Peer index: 2
BFD: disabled, down
NLRI for restart configured on peer: inet-unicast
NLRI advertised by peer: inet-unicast
NLRI for this session: inet-unicast
Peer supports Refresh capability (2)
Restart time configured on the peer: 120
Stale routes from peer are kept for: 300
Restart time requested by this peer: 120
NLRI that peer supports restart for: inet-unicast
NLRI that restart is negotiated for: inet-unicast
NLRI of received end-of-rib markers: inet-unicast
NLRI of all end-of-rib markers sent: inet-unicast
Peer supports 4 byte AS extension (peer-as 17)
Peer does not support Addpath
Table inet.0 Bit: 10000
RIB State: BGP restart is complete
Send state: in sync
Active prefixes: 0
Received prefixes: 7
Accepted prefixes: 7
Suppressed due to damping: 0
Advertised prefixes: 6
Last traffic (seconds): Received 17 Sent 3 Checked 9
Input messages: Total 2967 Updates 7 Refreshes 0 Octets 56629
Output messages: Total 2943 Updates 6 Refreshes 0 Octets 56197
Output Queue[0]: 0

```

```

Peer: 192.168.40.4+53990 AS 17 Local: 192.168.6.5+179 AS 17
Type: Internal State: Established (route reflector client)Flags: <Sync>
Last State: OpenConfirm Last Event: RecvKeepAlive
Last Error: None
Export: [ send-ospf ]
Options: <Preference LocalAddress Cluster Refresh>
Local Address: 192.168.6.5 Holdtime: 90 Preference: 170
Number of flaps: 0
Peer ID: 192.168.40.4 Local ID: 192.168.6.5 Active Holdtime: 90
Keepalive Interval: 30 Peer index: 1
BFD: disabled, down
NLRI for restart configured on peer: inet-unicast
NLRI advertised by peer: inet-unicast
NLRI for this session: inet-unicast
Peer supports Refresh capability (2)
Restart time configured on the peer: 120
Stale routes from peer are kept for: 300
Restart time requested by this peer: 120
NLRI that peer supports restart for: inet-unicast
NLRI that restart is negotiated for: inet-unicast
NLRI of received end-of-rib markers: inet-unicast
NLRI of all end-of-rib markers sent: inet-unicast

```



```

Peer supports 4 byte AS extension (peer-as 17)
Peer does not support Addpath
Table inet.0 Bit: 10000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:          0
  Received prefixes:        7
  Accepted prefixes:        7
  Suppressed due to damping: 0
  Advertised prefixes:      6
Last traffic (seconds): Received 5   Sent 23   Checked 52
Input messages: Total 2960   Updates 7   Refreshes 0   Octets 56496
Output messages: Total 2943   Updates 6   Refreshes 0   Octets 56197
Output Queue[0]: 0

```

### Verifying BGP Groups

**Purpose** Verify that the BGP groups are configured correctly.

**Action** From operational mode, enter the **show bgp group** command.

```

user@A> show bgp group
Group Type: Internal   AS: 17                      Local AS: 17
Name: internal-peers  Index: 0                     Flags: <>
Export: [ send-ospf ]
Options: <Cluster>
Holdtime: 0
Total peers: 4         Established: 4
192.163.6.4+179
192.168.40.4+53990
192.168.0.1+179
192.168.5.5+57458
inet.0: 0/26/16/0

Groups: 1  Peers: 4   External: 0   Internal: 4   Down peers: 0   Flaps: 0
Table      Tot Paths  Act Paths Suppressed  History Damp State   Pending
inet.0          26         0         0         0         0         0         0

```

### Verifying BGP Summary Information

**Purpose** Verify that the BGP configuration is correct.

**Action** From operational mode, enter the **show bgp summary** command.

```

user@A> show bgp summary

Groups: 1 Peers: 4 Down peers: 0
Table      Tot Paths  Act Paths Suppressed  History Damp State   Pending
inet.0          26         0         0         0         0         0         0
Peer      AS      InPkt    OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
192.163.6.4      17      2981      2965        0        0  22:19:15 0/6/1/0      0/0/0/0
192.168.0.1      17        36        575        0        0   13:43 0/6/1/0      0/0/0/0
192.168.5.5      17      2988      2964        0        0  22:19:10 0/7/7/0      0/0/0/0
192.168.40.4     17      2980      2964        0        0  22:19:14 0/7/7/0      0/0/0/0

```

### Verifying Routing Table Information

**Purpose** Verify that the routing table contains the IBGP routes.



**Action** From operational mode, enter the **show route** command.

```

user@A> show route
inet.0: 12 destinations, 38 routes (12 active, 0 holddown, 10 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.10.0/30      * [Direct/0] 22:22:03
                  > via fe-0/0/0.1
                  [BGP/170] 22:20:55, MED 2, localpref 100, from 192.168.40.4
                  AS path: I
                  > to 10.10.10.2 via fe-0/0/0.1
                  [BGP/170] 22:20:51, MED 3, localpref 100, from 192.168.5.5
                  AS path: I
                  > to 10.10.10.10 via fe-0/0/1.3
10.10.10.1/32     * [Local/0] 22:22:03
                  Local via fe-0/0/0.1
10.10.10.4/30     * [OSPF/10] 22:21:13, metric 2
                  > to 10.10.10.2 via fe-0/0/0.1
                  [BGP/170] 22:20:51, MED 4, localpref 100, from 192.168.5.5
                  AS path: I
                  > to 10.10.10.10 via fe-0/0/1.3
10.10.10.8/30     * [Direct/0] 22:22:03
                  > via fe-0/0/1.3
                  [BGP/170] 22:20:51, MED 2, localpref 100, from 192.168.5.5
                  AS path: I
                  > to 10.10.10.10 via fe-0/0/1.3
                  [BGP/170] 22:20:55, MED 3, localpref 100, from 192.168.40.4
                  AS path: I
                  > to 10.10.10.2 via fe-0/0/0.1
10.10.10.9/32     * [Local/0] 22:22:03
                  Local via fe-0/0/1.3
10.10.10.12/30    * [OSPF/10] 22:21:08, metric 2
                  > to 10.10.10.10 via fe-0/0/1.3
                  [BGP/170] 22:20:55, MED 4, localpref 100, from 192.168.40.4
                  AS path: I
                  > to 10.10.10.2 via fe-0/0/0.1
192.163.6.4/32    * [OSPF/10] 22:21:13, metric 1
                  > to 10.10.10.2 via fe-0/0/0.1
                  [BGP/170] 22:20:55, MED 1, localpref 100, from 192.168.40.4
                  AS path: I
                  > to 10.10.10.2 via fe-0/0/0.1
                  [BGP/170] 22:20:51, MED 3, localpref 100, from 192.168.5.5
                  AS path: I
                  > to 10.10.10.10 via fe-0/0/1.3
192.168.0.1/32    * [OSPF/10] 22:21:08, metric 1
                  > to 10.10.10.10 via fe-0/0/1.3
                  [BGP/170] 22:20:51, MED 1, localpref 100, from 192.168.5.5
                  AS path: I
                  > to 10.10.10.10 via fe-0/0/1.3
                  [BGP/170] 22:20:55, MED 3, localpref 100, from 192.168.40.4
                  AS path: I
                  > to 10.10.10.2 via fe-0/0/0.1
192.168.5.5/32    * [OSPF/10] 22:21:08, metric 2
                  > to 10.10.10.10 via fe-0/0/1.3
                  [BGP/170] 00:15:24, MED 1, localpref 100, from 192.168.0.1
                  AS path: I
                  > to 10.10.10.10 via fe-0/0/1.3
                  [BGP/170] 22:20:55, MED 4, localpref 100, from 192.168.40.4
                  AS path: I
                  > to 10.10.10.2 via fe-0/0/0.1
192.168.6.5/32    * [Direct/0] 22:22:04

```



```

> via lo0.1
[BGP/170] 22:20:51, MED 2, localpref 100, from 192.168.5.5
  AS path: I
> to 10.10.10.10 via fe-0/0/1.3
[BGP/170] 22:20:55, MED 2, localpref 100, from 192.168.40.4
  AS path: I
> to 10.10.10.2 via fe-0/0/0.1
192.168.40.4/32 * [OSPF/10] 22:21:13, metric 2
> to 10.10.10.2 via fe-0/0/0.1
[BGP/170] 22:20:55, MED 1, localpref 100, from 192.163.6.4
  AS path: I
> to 10.10.10.2 via fe-0/0/0.1
[BGP/170] 22:20:51, MED 4, localpref 100, from 192.168.5.5
  AS path: I
> to 10.10.10.10 via fe-0/0/1.3
224.0.0.5/32 * [OSPF/10] 22:22:07, metric 1
  MultiRecv

```

- Related Documentation**
- [Understanding External BGP Peering Sessions on page 2643](#)
  - [BGP Configuration Overview](#)

## Example: Configuring BGP Confederations

- [Understanding BGP Confederations on page 2917](#)
- [Example: Configuring BGP Confederations on page 2918](#)

### Understanding BGP Confederations

BGP confederations are another way to solve the scaling problems created by the BGP full mesh requirement. BGP confederations effectively break up a large autonomous system (AS) into subautonomous systems (sub-ASs). Each sub-AS must be uniquely identified within the confederation AS by a sub-AS number. Typically, sub-AS numbers are taken from the private AS numbers between 64,512 and 65,535.

Within a sub-AS, the same internal BGP (IBGP) full mesh requirement exists. Connections to other confederations are made with standard external BGP (EBGP), and peers outside the sub-AS are treated as external. To avoid routing loops, a sub-AS uses a confederation sequence, which operates like an AS path but uses only the privately assigned sub-AS numbers.

The confederation AS appears whole to other confederation ASs. The AS path received by other ASs shows only the globally assigned AS number. It does not include the confederation sequence or the privately assigned sub-AS numbers. The sub-AS numbers are removed when the route is advertised out of the confederation AS. [Figure 78 on page 2918](#) shows an AS divided into four confederations.



Figure 78: BGP Confederations

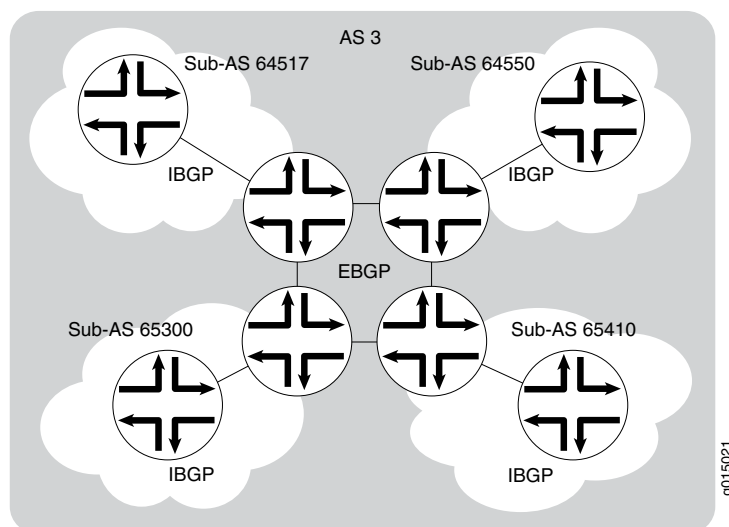


Figure 78 on page 2918 shows AS 3 divided into four sub-ASs, 64517, 64550, 65300, and 65410, which are linked through EBGP sessions. Because the confederations are connected by EBGP, they do not need to be fully meshed. EBGP routes are readvertised to other sub-ASs.

### Example: Configuring BGP Confederations

This example shows how to configure BGP confederations.

- [Requirements on page 2918](#)
- [Overview on page 2918](#)
- [Configuration on page 2919](#)
- [Verification on page 2921](#)

#### Requirements

- Configure network interfaces.
- Configure external peer sessions. See [“Example: Configuring External BGP Point-to-Point Peer Sessions” on page 2644](#).
- Configure interior gateway protocol (IGP) sessions between peers.
- Configure a routing policy to advertise the BGP routes.

#### Overview

Within a BGP confederation, the links between the confederation member autonomous systems (ASs) must be external BGP (EBGP) links, not internal BGP (IBGP) links.


Similar to route reflectors, BGP confederations reduce the number of peer sessions and TCP sessions to maintain connections between IBGP routing devices. BGP confederation is one method used to solve the scaling problems created by the IBGP full mesh requirement. BGP confederations effectively break up a large AS into subautonomous



systems. Each sub-AS must be uniquely identified within the confederation AS by a sub-AS number. Typically, sub-AS numbers are taken from the private AS numbers between 64512 and 65535. Within a sub-AS, the same IBGP full mesh requirement exists. Connections to other confederations are made with standard EBGP, and peers outside the sub-AS are treated as external. To avoid routing loops, a sub-AS uses a confederation sequence, which operates like an AS path but uses only the privately assigned sub-AS numbers.

Figure 79 on page 2919 shows a sample network in which AS 17 has two separate confederations: sub-AS 64512 and sub-AS 64513, each of which has multiple routers. Within a sub-AS, an IGP is used to establish network connectivity with internal peers. Between sub-ASs, an EBGP peer session is established.

Figure 79: Typical Network Using BGP Confederations

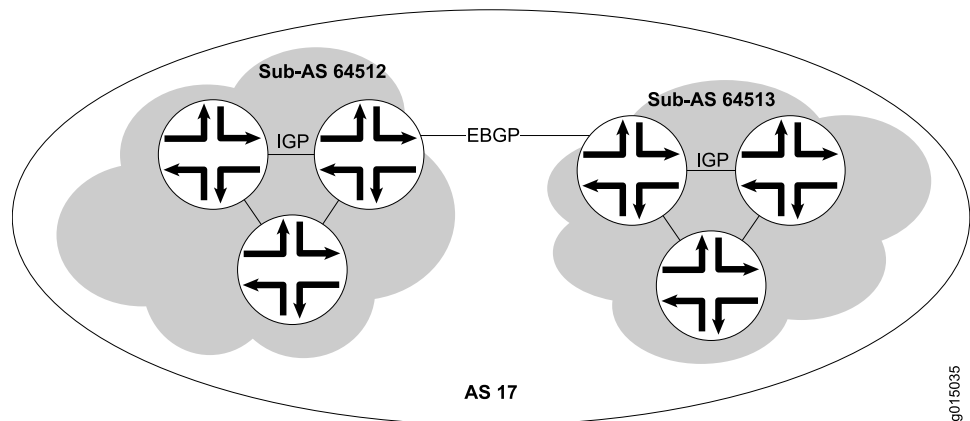

#### Configuration

##### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

All Devices in Sub-AS 64512	<pre> set routing-options autonomous-system 64512 set routing-options confederation 17 members 64512 set routing-options confederation 17 members 64513 set protocols bgp group sub-AS-64512 type internal set protocols bgp group sub-AS-64512 local-address 192.168.5.1 set protocols bgp group sub-AS-64512 neighbor 192.168.8.1 set protocols bgp group sub-AS-64512 neighbor 192.168.15.1 </pre>
Border Device in Sub-AS 64512	<pre> set protocols bgp group to-sub-AS-64513 type external set protocols bgp group to-sub-AS-64513 peer-as 64513 set protocols bgp group to-sub-AS-64513 neighbor 192.168.5.2 </pre>
All Devices in Sub-AS 64513	<pre> set routing-options autonomous-system 64513 set routing-options confederation 17 members 64512 set routing-options confederation 17 members 64513 set protocols bgp group sub-AS-64513 type internal set protocols bgp group sub-AS-64513 local-address 192.168.5.2 set protocols bgp group sub-AS-64513 neighbor 192.168.9.1 </pre>



```
set protocols bgp group sub-AS-64513 neighbor 192.168.16.1
```

**Border Device in  
Sub-AS 64513**

```
set protocols bgp group to-sub-AS-64512 type external
set protocols bgp group to-sub-AS-64512 peer-as 64512
set protocols bgp group to-sub-AS-64512 neighbor 192.168.5.1
```

**Step-by-Step  
Procedure**

This procedure shows the steps for the devices that are in sub-AS 64512.

The **autonomous-system** statement sets the sub-AS number of the device.

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure BGP confederations:

1. Set the sub-AS number for the device.

```
[edit routing-options]
user@host# set autonomous-system 64512
```

2. In the confederation, include all sub-ASs in the main AS.

The number 17 represents the main AS. The **members** statement lists all the sub-ASs in the main AS.

```
[edit routing-options confederation]
user@host# set 17 members 64512
user@host# set 17 members 64513
```

3. On the border device in sub-AS 64512, configure an EBGP connection to the border device in AS 64513.

```
[edit protocols bgp group to-sub-AS-64513]
user@host# set type external
user@host# set neighbor 192.168.5.2
user@host# set peer-as 64513
```

4. Configure an IBGP group for peering with the devices within sub-AS 64512.

```
[edit protocols bgp group sub-AS-64512]
user@host# set type internal
user@host# set local-address 192.168.5.1
user@host# neighbor 192.168.8.1
user@host# neighbor 192.168.15.1
```

**Results** From configuration mode, confirm your configuration by entering the **show routing-options** and **show protocols** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show routing-options
autonomous-system 64512;
confederation 17 members [ 64512 64513 ];

user@host# show protocols
bgp {
  group to-sub-AS-64513 { # On the border devices only
    type external;
```



```
    peer-as 64513;
    neighbor 192.168.5.2;
  }
  group sub-AS-64512 {
    type internal;
    local-address 192.168.5.1;
    neighbor 192.168.8.1;
    neighbor 192.168.15.1;
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode. Repeat these steps for sSub-AS 64513.

### ***Verification***

Confirm that the configuration is working properly.

- [Verifying BGP Neighbors on page 2921](#)
- [Verifying BGP Groups on page 2923](#)
- [Verifying BGP Summary Information on page 2923](#)

### ***Verifying BGP Neighbors***

**Purpose** Verify that BGP is running on configured interfaces and that the BGP session is active for each neighbor address.

**Action** From the CLI, enter the **show bgp neighbor** command.



## Sample Output

```

user@host> show bgp neighbor
Peer: 10.255.245.12+179 AS 35 Local: 10.255.245.13+2884 AS 35
  Type: Internal    State: Established (route reflector client)Flags: Sync
  Last State: OpenConfirm  Last Event: RecvKeepAlive
  Last Error: None
  Options: Preference LocalAddress HoldTime Cluster AddressFamily Rib-group Refresh

  Address families configured: inet-vpn-unicast inet-labeled-unicast
  Local Address: 10.255.245.13 Holdtime: 90 Preference: 170
  Flags for NLRI inet-vpn-unicast: AggregateLabel
  Flags for NLRI inet-labeled-unicast: AggregateLabel
  Number of flaps: 0
  Peer ID: 10.255.245.12 Local ID: 10.255.245.13 Active Holdtime: 90
  Keepalive Interval: 30
  NLRI advertised by peer: inet-vpn-unicast inet-labeled-unicast
  NLRI for this session: inet-vpn-unicast inet-labeled-unicast
  Peer supports Refresh capability (2)
Restart time configured on the peer: 300
  Stale routes from peer are kept for: 60
  Restart time requested by this peer: 300
  NLRI that peer supports restart for: inet-unicast inet6-unicast
  NLRI that restart is negotiated for: inet-unicast inet6-unicast
  NLRI of received end-of-rib markers: inet-unicast inet6-unicast
  NLRI of all end-of-rib markers sent: inet-unicast inet6-unicast
  Table inet.0 Bit: 10000
    RIB State: restart is complete
    Send state: in sync
    Active prefixes: 4
    Received prefixes: 6
    Suppressed due to damping: 0
  Table inet6.0 Bit: 20000
    RIB State: restart is complete
    Send state: in sync
    Active prefixes: 0
    Received prefixes: 2
    Suppressed due to damping: 0
  Last traffic (seconds): Received 3 Sent 3 Checked 3
  Input messages: Total 9 Updates 6 Refreshes 0 Octets 403
  Output messages: Total 7 Updates 3 Refreshes 0 Octets 365
  Output Queue[0]: 0
  Output Queue[1]: 0
  Trace options: detail packets
  Trace file: /var/log/bgpr size 131072 files 10

```

**Meaning** The output shows a list of the BGP neighbors with detailed session information. Verify the following information:

- Each configured peering neighbor is listed.
- For **State**, each BGP session is **Established**.
- For **Type**, each peer is configured as the correct type (either internal or external).
- For **AS**, the AS number of the BGP neighbor is correct.



**Verifying BGP Groups**

**Purpose** Verify that the BGP groups are configured correctly.

**Action** From the CLI, enter the **show bgp group** command.

**Sample Output**

```

user@host> show bgp group
Group Type: Internal    AS: 10045          Local AS: 10045
  Name: pe-to-asbr2                      Flags: Export Eval
  Export: [ match-all ]
  Total peers: 1          Established: 1
  10.0.0.4+179
  bgp.13vpn.0: 1/1/0
  vpn-green.inet.0: 1/1/0

Groups: 1   Peers: 1   External: 0   Internal: 1   Down peers: 0   Flaps: 0
Table      Tot Paths  Act Paths  Suppressed  History Damp State  Pending
bgp.13vpn.0      1          1          0          0          0          0

```

**Meaning** The output shows a list of the BGP groups with detailed group information. Verify the following information:

- Each configured group is listed.
- For **AS**, each group's remote AS is configured correctly.
- For **Local AS**, each group's local AS is configured correctly.
- For **Group Type**, each group has the correct type (either internal or external).
- For **Total peers**, the expected number of peers within the group is shown.
- For **Established**, the expected number of peers within the group have BGP sessions in the **Established** state.
- The IP addresses of all the peers within the group are present.

**Verifying BGP Summary Information**

**Purpose** Verify that the BGP configuration is correct.

**Action** From the CLI, enter the **show bgp summary** command.



## Sample Output

```

user@host> show bgp summary
Groups: 1 Peers: 3 Down peers: 0
Table Tot Paths Act Paths Suppressed History Damp State Pending
inet.0 6 4 0 0 0 0
Peer AS InPkt OutPkt OutQ Flaps Last Up/Dwn
State|#Active/Received/Damped...
10.0.0.2 65002 88675 88652 0 2 42:38 2/4/0
0/0/0
10.0.0.3 65002 54528 54532 0 1 2w4d22h 0/0/0
0/0/0
10.0.0.4 65002 51597 51584 0 0 2w3d22h 2/2/0
0/0/0

```

**Meaning** The output shows a summary of BGP session information. Verify the following information:

- For **Groups**, the total number of configured groups is shown.
- For **Peers**, the total number of BGP peers is shown.
- For **Down Peers**, the total number of unestablished peers is 0. If this value is not zero, one or more peering sessions are not yet established.
- Under **Peer**, the IP address for each configured peer is shown.
- Under **AS**, the peer AS for each configured peer is correct.
- Under **Up/Dwn State**, the BGP state reflects the number of paths received from the neighbor, the number of these paths that have been accepted, and the number of routes being damped (such as 0/0/0). If the field is **Active**, it indicates a problem in the establishment of the BGP session.

- Related Documentation**
- [Understanding External BGP Peering Sessions on page 2643](#)
  - [BGP Configuration Overview](#)

## BGP Security Configuration

- [Example: Configuring BGP Route Authentication on page 2924](#)
- [Examples: Configuring TCP and BGP Security on page 2931](#)

### Example: Configuring BGP Route Authentication

- [Understanding Route Authentication on page 2924](#)
- [Example: Configuring Route Authentication for BGP on page 2926](#)

#### Understanding Route Authentication

The use of router and route authentication and route integrity greatly mitigates the risk of being attacked by a machine or router that has been configured to share incorrect routing information with another router. In this kind of attack, the attacked router can be tricked into creating a routing loop, or the attacked router's routing table can be greatly increased thus impacting performance, or routing information can be redirected to a



place in the network for the attacker to analyze it. Bogus route advertisements can be sent out on a segment. These updates can be accepted into the routing tables of neighbor routers unless an authentication mechanism is in place to verify the source of the routes.

Router and route authentication enables routers to share information only if they can verify that they are talking to a trusted source, based on a password (key). In this method, a hashed key is sent along with the route being sent to another router. The receiving router compares the sent key to its own configured key. If they are the same, it accepts the route. By using a hashing algorithm, the key is not sent over the wire in plain text. Instead, a hash is calculated using the configured key. The routing update is used as the input text, along with the key, into the hashing function. This hash is sent along with the route update to the receiving router. The receiving router compares the received hash with a hash it generates on the route update using the preshared key configured on it. If the two hashes are the same, the route is assumed to be from a trusted source. The key is known only to the sending and receiving routers.

To further strengthen security, you can configure a series of authentication keys (a *keychain*). Each key has a unique start time within the keychain. Keychain authentication allows you to change the password information periodically without bringing down peering sessions. This keychain authentication method is referred to as *hitless* because the keys roll over from one to the next without resetting any peering sessions or interrupting the routing protocol.

The sending peer uses the following rules to identify the active authentication key:

- The start time is less than or equal to the current time (in other words, not in the future).
- The start time is greater than that of all other keys in the chain whose start time is less than the current time (in other words, closest to the current time).

The receiving peer determines the key with which it authenticates based on the incoming key identifier.

The sending peer identifies the current authentication key based on a configured start time and then generates a hash value using the current key. The sending peer then inserts a TCP-enhanced authentication option object into the BGP update message. The object contains an object ID (assigned by IANA), the object length, the current key, and a hash value.

The receiving peer examines the incoming TCP-enhanced authentication option, looks up the received authentication key, and determines whether the key is acceptable based on the start time, the system time, and the tolerance parameter. If the key is accepted, the receiving peer calculates a hash and authenticates the update message.

Initial application of a keychain to a TCP session causes the session to reset. However, once the keychain is applied, the addition or removal of a password from the keychain does not cause the TCP session to reset. Also, the TCP session does not reset when the keychain changes from one authentication algorithm to another.



### Example: Configuring Route Authentication for BGP

---

All BGP protocol exchanges can be authenticated to guarantee that only trusted routing devices participate in autonomous system (AS) routing updates. By default, authentication is disabled.

- [Requirements on page 2926](#)
- [Overview on page 2926](#)
- [Configuration on page 2927](#)
- [Verification on page 2929](#)

#### **Requirements**

Before you begin:

- Configure the router interfaces.
- Configure an interior gateway protocol (IGP).

#### **Overview**

When you configure authentication, the algorithm creates an encoded checksum that is included in the transmitted packet. The receiving routing device uses an authentication key (password) to verify the packet's checksum.

This example includes the following statements for configuring and applying the keychain:

- **key**—A keychain can have multiple keys. Each key within a keychain must be identified by a unique integer value. The range of valid identifier values is from 0 through 63.  
  
The key can be up to 126 characters long. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").
- **tolerance**—(Optional) For each keychain, you can configure a clock-skew tolerance value in seconds. The clock-skew tolerance is applicable to the receiver accepting keys for BGP updates. The configurable range is 0 through 999,999,999 seconds. During the tolerance period, either the current or previous password is acceptable.
- **key-chain**—For each keychain, you must specify a name. This example defines one keychain: **bgp-auth**. You can have multiple keychains on a routing device. For example, you can have a keychain for BGP, a keychain for OSPF, and a keychain for LDP.
- **secret**—For each key in the keychain, you must set a secret password. This password can be entered in either encrypted or plain text format in the **secret** statement. It is always displayed in encrypted format.
- **start-time**—Each key must specify a start time in UTC format. Control gets passed from one key to the next. When a configured start time arrives (based on the routing device's clock), the key with that start time becomes active. Start times are specified in the local time zone for a routing device and must be unique within the keychain.



- **authentication-key-chain**—Enables you to apply a keychain at the global BGP level for all peers, for a group, or for a neighbor. This example applies the keychain to the peers defined in the external BGP (EBGP) group called **ext**.
- **authentication-algorithm**—For each keychain, you can specify a hashing algorithm. The algorithm can be AES-128, MD5, or SHA-1.


You associate a keychain and an authentication algorithm with a BGP neighboring session.

This example configures a keychain named **bgp-auth**. Key 0 will be sent and accepted starting at 2011-6-23.20:19:33 -0700, and will stop being sent and accepted when the next key in the keychain (key 1) becomes active. Key 1 becomes active one year later at 2012-6-23.20:19:33 -0700, and will not stop being sent and accepted unless another key is configured with a start time that is later than the start time of key 1. A clock-skew tolerance of 30 seconds applies to the receiver accepting the keys. During the tolerance period, either the current or previous key is acceptable. The keys are shared-secret passwords. This means that the neighbors receiving the authenticated routing updates must have the same authentication keychain configuration, including the same keys (passwords). So Router R0 and Router R1 must have the same authentication-key-chain configuration if they are configured as peers. This example shows the configuration on only one of the routing devices.

#### Topology Diagram

Figure 80 on page 2927 shows the topology used in this example.

Figure 80: Authentication for BGP

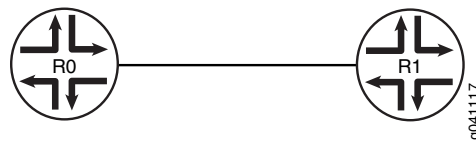

#### Configuration

##### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set protocols bgp group ext type external
set protocols bgp group ext peer-as 65530
set protocols bgp group ext neighbor 172.16.2.1
set routing-options autonomous-system 65533
set protocols bgp group ext authentication-key-chain bgp-auth
set protocols bgp group ext authentication-algorithm md5
set security authentication-key-chains key-chain bgp-auth tolerance 30
set security authentication-key-chains key-chain bgp-auth key 0 secret
  this-is-the-secret-password
set security authentication-key-chains key-chain bgp-auth key 0 start-time
  2011-6-23.20:19:33-0700
set security authentication-key-chains key-chain bgp-auth key 1 secret
  this-is-another-secret-password
```



```
set security authentication-key-chains key-chain bgp-auth key 1 start-time
2012-6-23.20:19:33-0700
```

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Router R1 to accept route filters from Device CE1 and perform outbound route filtering using the received filters:

1. Configure the local autonomous system.

```
[edit routing-options]
user@R1# set autonomous-system 65533
```

2. Configure one or more BGP groups.

```
[edit protocols bgp group ext]
user@R1# set type external
user@R1# set peer-as 65530
user@R1# set neighbor 172.16.2.1
```

3. Configure authentication with multiple keys.

```
[edit security authentication-key-chains key-chain bgp-auth]
user@R1# set key 0 secret this-is-the-secret-password
user@R1# set key 0 start-time 2011-6-23.20:19:33-0700
user@R1# set key 1 secret this-is-another-secret-password
user@R1# set key 1 start-time 2012-6-23.20:19:33-0700
```

The start time of each key must be unique within the keychain.

4. Apply the authentication keychain to BGP, and set the hashing algorithm.

```
[edit protocols bgp group ext]
user@R1# set authentication-key-chain bgp-auth
user@R1# set authentication-algorithm md5
```

5. (Optional) Apply a clock-skew tolerance value in seconds.

```
[edit security authentication-key-chains key-chain bgp-auth]
user@R1# set tolerance 30
```

**Results** From configuration mode, confirm your configuration by entering the **show protocols**, **show routing-options**, and **show security** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show protocols
bgp {
  group ext {
    type external;
    peer-as 65530;
    neighbor 172.16.2.1;
    authentication-key-chain bgp-auth;
    authentication-algorithm md5;
  }
}

user@R1# show routing-options
```



```

autonomous-system 65533;

user@R1# show security
authentication-key-chains {
  key-chain bgp-auth {
    tolerance 30;
    key 0 {
      secret
        "$9$5T6AREylK8RhXNdwaJh/CtO1cyKvWx9AyIMWdVgoJdqP5FCAQz3IEhcMWLxNbgJDiF6A";
      ## SECRET-DATA
      start-time "2011-6-23.20:19:33 -0700";
    }
    key 1 {
      secret "$9$UyD.59CuOIh9AylKW-dqmFT369CuRhSP5hrvMN-JGDiqfu0lleWpuh.";
      ## SECRET-DATA
      start-time "2012-6-23.20:19:33 -0700";
    }
  }
}

```

If you are done configuring the device, enter **commit** from configuration mode.

Repeat the procedure for every BGP-enabled device in the network, using the appropriate interface names and addresses for each BGP-enabled device.

### Verification

Confirm that the configuration is working properly.

- [Verifying Authentication for the Neighbor on page 2929](#)
- [Verifying That Authorization Messages Are Sent on page 2930](#)
- [Checking Authentication Errors on page 2930](#)
- [Verifying the Operation of the Keychain on page 2931](#)

### Verifying Authentication for the Neighbor

**Purpose** Make sure that the **AutheKeyChain** option appears in the output of the **show bgp neighbor** command.

**Action** From operational mode, enter the **show bgp neighbor** command.

```

user@R1> show bgp neighbor
Peer: 172.16.2.1+179 AS 65530 Local: 172.16.2.2+1222 AS 65533
  Type: External State: Established Flags: <Sync>
  Last State: OpenConfirm Last Event: RecvKeepAlive
  Last Error: None
  Export: [ direct-lo0 ]
  Options: <Preference PeerAS Refresh>
  Options: <AutheKeyChain>
  Authentication key is configured
  Authentication key chain: jni
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 172.16.2.1 Local ID: 10.255.124.35 Active Holdtime: 90
  Keepalive Interval: 30 Peer index: 0
  Local Interface: fe-0/0/1.0

```



```

NLRI advertised by peer: inet-unicast
NLRI for this session: inet-unicast
Peer supports Refresh capability (2)
Table inet.0 Bit: 10000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:          2
  Received prefixes:        2
  Suppressed due to damping: 0
  Advertised prefixes:      1
Last traffic (seconds): Received 2   Sent 2   Checked 2
Input messages: Total 21   Updates 2   Refreshes 0   Octets 477
Output messages: Total 22   Updates 1   Refreshes 0   Octets 471
Output Queue[0]: 0

```

### Verifying That Authorization Messages Are Sent

**Purpose** Confirm that BGP has the enhanced authorization option.

**Action** From operational mode, enter the `monitor traffic interface fe-0/0/1` command.

```

user@R1> monitor traffic interface fe-0/0/1
verbose output suppressed, use <detail> or <extensive> for full protocol decode
Listening on fe-0/0/1, capture size 96 bytes

13:08:00.618402 In arp who-has 172.16.2.66 tell 172.16.2.69
13:08:02.408249 Out IP 172.16.2.2.1122 > 172.16.2.1.646: P
1889289217:1889289235(18) ack 2215740969 win 58486 <nop,nop,timestamp 167557
1465469,nop,Enhanced Auth keyid 0 diglen 12 digest: fe3366001f45767165f17037>:
13:08:02.418396 In IP 172.16.2.1.646 > 172.16.2.2.1122: P 1:19(18) ack 18 win
57100 <nop,nop,timestamp 1466460 167557,nop,Enhanced Auth keyid 0 diglen 12
digest: a18c31eda1b14b2900921675>:
13:08:02.518146 Out IP 172.16.2.2.1122 > 172.16.2.1.646: . ack 19 win 58468
<nop,nop,timestamp 167568 1466460,nop,Enhanced Auth keyid 0 diglen 12 digest:
c3b6422eb6bd3fd9cf79742b>
13:08:28.199557 Out IP 172.16.2.2.nerv > 172.16.2.1.bgp: P
286842489:286842508(19) ack 931203976 win 57200 <nop,Enhanced Auth keyid 0
diglen 12 digest: fc0e42900a73736bcc07c1a4>: BGP, length: 19
13:08:28.209661 In IP 172.16.2.1.bgp > 172.16.2.2.nerv: P 1:20(19) ack 19 win
56835 <nop,Enhanced Auth keyid 0 diglen 12 digest: 0fc8578c489fabce63aeb2c3>:
BGP, length: 19
13:08:28.309525 Out IP 172.16.2.2.nerv > 172.16.2.1.bgp: . ack 20 win 57181
<nop,Enhanced Auth keyid 0 diglen 12 digest: ef03f282fb2ece0039491df8>
13:08:32.439708 Out IP 172.16.2.2.1122 > 172.16.2.1.646: P 54:72(18) ack 55 win
58432 <nop,nop,timestamp 170560 1468472,nop,Enhanced Auth keyid 0 diglen 12
digest: 76e0cf926f348b726c631944>:
13:08:32.449795 In IP 172.16.2.1.646 > 172.16.2.2.1122: P 55:73(18) ack 72 win
57046 <nop,nop,timestamp 1469463 170560,nop,Enhanced Auth keyid 0 diglen 12
digest: dae3eec390d18a114431f4d8>:
13:08:32.549726 Out IP 172.16.2.2.1122 > 172.16.2.1.646: . ack 73 win 58414
<nop,nop,timestamp 170571 1469463,nop,Enhanced Auth keyid 0 diglen 12 digest:
851df771aee2ea7a43a0c46c>
13:08:33.719880 In arp who-has 172.16.2.66 tell 172.16.2.69
^C
35 packets received by filter
0 packets dropped by kernel

```

### Checking Authentication Errors

**Purpose** Check the number of packets dropped by TCP because of authentication errors.



**Action** From operational mode, enter the **show system statistics tcp | match auth** command.

```
user@R1> show system statistics tcp | match auth
0 send packets dropped by TCP due to auth errors
58 rcv packets dropped by TCP due to auth errors
```

#### *Verifying the Operation of the Keychain*

**Purpose** Check the number of packets dropped by TCP because of authentication errors.

**Action** From operational mode, enter the **show security keychain detail** command.

```
user@R1> show security keychain detail
keychain          Active-ID      Next-ID      Transition  Tolerance
                  Send  Receive    Send  Receive
bgp-auth          3      3           1      1         1d 23:58    30
Id 3, Algorithm hmac-md5, State send-receive, Option basic
Start-time Wed Aug 11 16:28:00 2010, Mode send-receive
Id 1, Algorithm hmac-md5, State inactive, Option basic
Start-time Fri Aug 20 11:30:57 2010, Mode send-receive
```

- Related Documentation**
- [Understanding External BGP Peering Sessions on page 2643](#)
  - [BGP Configuration Overview](#)

## Examples: Configuring TCP and BGP Security

- [Understanding Security Options for BGP with TCP on page 2931](#)
- [Example: Configuring a Filter to Block TCP Access to a Port Except from Specified BGP Peers on page 2932](#)
- [Example: Configuring a Filter to Limit TCP Access to a Port Based On a Prefix List on page 2937](#)
- [Example: Limiting TCP Segment Size for BGP on page 2940](#)

### Understanding Security Options for BGP with TCP

Among routing protocols, BGP is unique in using TCP as its transport protocol. BGP peers are established by manual configuration between routing devices to create a TCP session on port 179. A BGP-enabled device periodically sends keepalive messages to maintain the connection.

Over time, BGP has become the dominant interdomain routing protocol on the Internet. However, it has limited guarantees of stability and security. Configuring security options for BGP must balance suitable security measures with acceptable costs. No one method has emerged as superior to other methods. Each network administrator must configure security measures that meet the needs of the network being used.

For detailed information about the security issues associated with BGP's use of TCP as a transport protocol, see RFC 4272, *BGP Security Vulnerabilities Analysis*.



### Example: Configuring a Filter to Block TCP Access to a Port Except from Specified BGP Peers

This example shows how to configure a standard stateless firewall filter that blocks all TCP connection attempts to port 179 from all requesters except from specified BGP peers.

- [Requirements on page 2932](#)
- [Overview on page 2932](#)
- [Configuration on page 2932](#)
- [Verification on page 2935](#)

#### Requirements

No special configuration beyond device initialization is required before you configure this example.


#### Overview

In this example, you create a stateless firewall filter that blocks all TCP connection attempts to port 179 from all requesters except the specified BGP peers.

The stateless firewall filter **filter\_bgp179** matches all packets from the directly connected interfaces on Device A and Device B to the destination port number 179.

Figure 81 on page 2932 shows the topology used in this example. Device C attempts to make a TCP connection to Device E. Device E blocks the connection attempt. This example shows the configuration on Device E.

Figure 81: Typical Network with BGP Peer Sessions

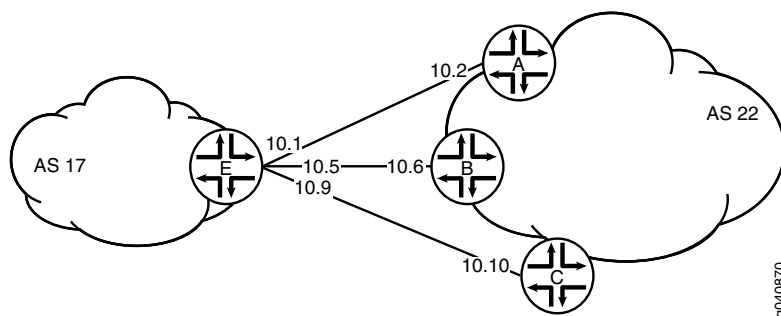

#### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device C**

```

set interfaces ge-1/2/0 unit 10 description to-E
set interfaces ge-1/2/0 unit 10 family inet address 10.10.10.10/30
set protocols bgp group external-peers type external
set protocols bgp group external-peers peer-as 17
set protocols bgp group external-peers neighbor 10.10.10.9

```



```
set routing-options autonomous-system 22
```

**Device E**

```

set interfaces ge-1/2/0 unit 0 description to-A
set interfaces ge-1/2/0 unit 0 family inet address 10.10.10.1/30
set interfaces ge-1/2/1 unit 5 description to-B
set interfaces ge-1/2/1 unit 5 family inet address 10.10.10.5/30
set interfaces ge-1/0/0 unit 9 description to-C
set interfaces ge-1/0/0 unit 9 family inet address 10.10.10.9/30
set interfaces lo0 unit 2 family inet filter input filter_bgp179
set interfaces lo0 unit 2 family inet address 192.168.0.1/32
set protocols bgp group external-peers type external
set protocols bgp group external-peers peer-as 22
set protocols bgp group external-peers neighbor 10.10.10.2
set protocols bgp group external-peers neighbor 10.10.10.6
set protocols bgp group external-peers neighbor 10.10.10.10
set routing-options autonomous-system 17
set firewall family inet filter filter_bgp179 term 1 from source-address 10.10.10.2/32
set firewall family inet filter filter_bgp179 term 1 from source-address 10.10.10.6/32
set firewall family inet filter filter_bgp179 term 1 from destination-port bgp
set firewall family inet filter filter_bgp179 term 1 then accept
set firewall family inet filter filter_bgp179 term 2 then reject

```

### *Configuring Device E*

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure Device E with a stateless firewall filter that blocks all TCP connection attempts to port 179 from all requestors except specified BGP peers:

1. Configure the interfaces.
 

```

user@E# set interfaces ge-1/2/0 unit 0 description to-A
user@E# set interfaces ge-1/2/0 unit 0 family inet address 10.10.10.1/30

user@E# set interfaces ge-1/2/1 unit 5 description to-B
user@E# set interfaces ge-1/2/1 unit 5 family inet address 10.10.10.5/30

user@E# set interfaces ge-1/0/0 unit 9 description to-C
user@E# set interfaces ge-1/0/0 unit 9 family inet address 10.10.10.9/30

```
2. Configure BGP.
 

```

[edit protocols bgp group external-peers]
user@E# set type external
user@E# set peer-as 22
user@E# set neighbor 10.10.10.2
user@E# set neighbor 10.10.10.6
user@E# set neighbor 10.10.10.10

```
3. Configure the autonomous system number.
 

```

[edit routing-options]
user@E# set autonomous-system 17

```



4. Define the filter term that accepts TCP connection attempts to port 179 from the specified BGP peers.

```
[edit firewall family inet filter filter_bgp179]
user@E# set term 1 from source-address 10.10.10.2/32
user@E# set term 1 from source-address 10.10.10.6/32
user@E# set term 1 from destination-port bgp
user@E# set term 1 then accept
```

5. Define the other filter term to reject packets from other sources.

```
[edit firewall family inet filter filter_bgp179]
user@E# set term 2 then reject
```

6. Apply the firewall filter to the loopback interface.

```
[edit interfaces lo0 unit 2 family inet]
user@E# set filter input filter_bgp179
user@E# set address 192.168.0.1/32
```

**Results** From configuration mode, confirm your configuration by entering the **show firewall**, **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@E# show firewall
family inet {
  filter filter_bgp179 {
    term 1 {
      from {
        source-address {
          10.10.10.2/32;
          10.10.10.6/32;
        }
        destination-port bgp;
      }
      then accept;
    }
    term 2 {
      then {
        reject;
      }
    }
  }
}
```

```
user@E# show interfaces
lo0 {
  unit 2 {
    family inet {
      filter {
        input filter_bgp179;
      }
      address 192.168.0.1/32;
    }
  }
}
```



```

}
ge-1/2/0 {
  unit 0 {
    description to-A;
    family inet {
      address 10.10.10.1/30;
    }
  }
}
ge-1/2/1 {
  unit 5 {
    description to-B;
    family inet {
      address 10.10.10.5/30;
    }
  }
}
ge-1/0/0 {
  unit 9 {
    description to-C;
    family inet {
      address 10.10.10.9/30;
    }
  }
}

user@E# show protocols
bgp {
  group external-peers {
    type external;
    peer-as 22;
    neighbor 10.10.10.2;
    neighbor 10.10.10.6;
    neighbor 10.10.10.10;
  }
}

user@E# show routing-options
autonomous-system 17;

```

If you are done configuring the device, enter **commit** from configuration mode.

### **Verification**

Confirm that the configuration is working properly.

- [Verifying That the Filter Is Configured on page 2935](#)
- [Verifying the TCP Connections on page 2936](#)
- [Monitoring Traffic on the Interfaces on page 2936](#)

### **Verifying That the Filter Is Configured**

**Purpose** Make sure that the filter is listed in output of the **show firewall filter** command.



**Action** user@E> show firewall filter filter\_bgp179  
Filter: filter\_bgp179

### *Verifying the TCP Connections*

**Purpose** Verify the TCP connections.

**Action** From operational mode, run the `show system connections extensive` command on Device C and Device E.

The output on Device C shows the attempt to establish a TCP connection. The output on Device E shows that connections are established with Device A and Device B only.

user@C> show system connections extensive | match 10.10.10

```
tcp4      0      0  10.10.10.9.51872      10.10.10.10.179      SYN_SENT
```

user@E> show system connections extensive | match 10.10.10

```
tcp4      0      0  10.10.10.5.179        10.10.10.6.62096     ESTABLISHED
tcp4      0      0  10.10.10.6.62096      10.10.10.5.179       ESTABLISHED
tcp4      0      0  10.10.10.1.179        10.10.10.2.61506     ESTABLISHED
tcp4      0      0  10.10.10.2.61506      10.10.10.1.179       ESTABLISHED
```

### *Monitoring Traffic on the Interfaces*

**Purpose** Use the `monitor traffic` command to compare the traffic on an interface that establishes a TCP connection with the traffic on an interface that does not establish a TCP connection.

**Action** From operational mode, run the `monitor traffic` command on the Device E interface to Device B and on the Device E interface to Device C. The following sample output verifies that in the first example, acknowledgment (`ack`) messages are received. In the second example, `ack` messages are not received.

user@E> monitor traffic size 1500 interface ge-1/2/1.5

```
19:02:49.700912 Out IP 10.10.10.5.bgp > 10.10.10.6.62096: P
3330573561:3330573580(19) ack 915601686 win 16384 <nop,nop,timestamp 1869518816
1869504850>: BGP, length: 19
19:02:49.801244 In IP 10.10.10.6.62096 > 10.10.10.5.bgp: . ack 19 win 16384
<nop,nop,timestamp 1869518916 1869518816>
19:03:03.323018 In IP 10.10.10.6.62096 > 10.10.10.5.bgp: P 1:20(19) ack 19 win
16384 <nop,nop,timestamp 1869532439 1869518816>: BGP, length: 19
19:03:03.422418 Out IP 10.10.10.5.bgp > 10.10.10.6.62096: . ack 20 win 16384
<nop,nop,timestamp 1869532539 1869532439>
19:03:17.220162 Out IP 10.10.10.5.bgp > 10.10.10.6.62096: P 19:38(19) ack 20 win
16384 <nop,nop,timestamp 1869546338 1869532439>: BGP, length: 19
19:03:17.320501 In IP 10.10.10.6.62096 > 10.10.10.5.bgp: . ack 38 win 16384
<nop,nop,timestamp 1869546438 1869546338>
```

user@E> monitor traffic size 1500 interface ge-1/0/0.9

```
18:54:20.175471 Out IP 10.10.10.9.61335 > 10.10.10.10.bgp: S 573929123:573929123(0)
win 16384 <mss 1460,nop,wscale 0,nop,nop,timestamp 1869009240 0,sackOK,eol>
18:54:23.174422 Out IP 10.10.10.9.61335 > 10.10.10.10.bgp: S 573929123:573929123(0)
win 16384 <mss 1460,nop,wscale 0,nop,nop,timestamp 1869012240 0,sackOK,eol>
18:54:26.374118 Out IP 10.10.10.9.61335 > 10.10.10.10.bgp: S 573929123:573929123(0)
win 16384 <mss 1460,nop,wscale 0,nop,nop,timestamp 1869015440 0,sackOK,eol>
18:54:29.573799 Out IP 10.10.10.9.61335 > 10.10.10.10.bgp: S 573929123:573929123(0)
```



```

win 16384 <mss 1460,sackOK,ea1>
18:54:32.773493 Out IP 10.10.10.9.61335 > 10.10.10.10.bgp: S 573929123:573929123(0)
win 16384 <mss 1460,sackOK,ea1>
18:54:35.973185 Out IP 10.10.10.9.61335 > 10.10.10.10.bgp: S 573929123:573929123(0)
win 16384 <mss 1460,sackOK,ea1>

```

### Example: Configuring a Filter to Limit TCP Access to a Port Based On a Prefix List

This example shows how to configure a standard stateless firewall filter that limits certain TCP and Internet Control Message Protocol (ICMP) traffic destined for the Routing Engine by specifying a list of prefix sources that contain allowed BGP peers.

- [Requirements on page 2937](#)
- [Overview on page 2937](#)
- [Configuration on page 2937](#)
- [Verification on page 2939](#)

#### Requirements

No special configuration beyond device initialization is required before configuring this example.

#### Overview

In this example, you create a stateless firewall filter that blocks all TCP connection attempts to port 179 from all requesters except BGP peers that have a specified prefix.

A source prefix list, **plist\_bgp179**, is created that specifies the list of source prefixes that contain allowed BGP peers.

The stateless firewall filter **filter\_bgp179** matches all packets from the source prefix list **plist\_bgp179** to the destination port number 179.

#### Configuration

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

- [Configure the Filter on page 2938](#)
- [Results on page 2938](#)

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```

set policy-options prefix-list plist_bgp179 apply-path "protocols bgp group <*> neighbor
<*>"
set firewall family inet filter filter_bgp179 term 1 from source-address 0.0.0.0/0
set firewall family inet filter filter_bgp179 term 1 from source-prefix-list plist_bgp179 except
set firewall family inet filter filter_bgp179 term 1 from destination-port bgp
set firewall family inet filter filter_bgp179 term 1 then reject
set firewall family inet filter filter_bgp179 term 2 then accept
set interfaces lo0 unit 0 family inet filter input filter_bgp179

```



```
set interfaces lo0 unit 0 family inet address 127.0.0.1/32
```

### *Configure the Filter*

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure the filter:

1. Expand the prefix list **bgp179** to include all prefixes pointed to by the BGP peer group defined by **protocols bgp group <\*> neighbor <\*>**.

```
[edit policy-options prefix-list plist_bgp179]
user@host# set apply-path "protocols bgp group <*> neighbor <*>"
```

2. Define the filter term that rejects TCP connection attempts to port 179 from all requesters except the specified BGP peers.

```
[edit firewall family inet filter filter_bgp179]
user@host# set term term1 from source-address 0.0.0.0/0
user@host# set term term1 from source-prefix-list bgp179 except
user@host# set term term1 from destination-port bgp
user@host# set term term1 then reject
```

3. Define the other filter term to accept all packets.

```
[edit firewall family inet filter filter_bgp179]
user@host# set term term2 then accept
```

4. Apply the firewall filter to the loopback interface.

```
[edit interfaces lo0 unit 0 family inet]
user@host# set filter input filter_bgp179
user@host# set address 127.0.0.1/32
```

### *Results*

From configuration mode, confirm your configuration by entering the **show firewall**, **show interfaces**, and **show policy-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show firewall
family inet {
  filter filter_bgp179 {
    term 1 {
      from {
        source-address {
          0.0.0.0/0;
        }
        source-prefix-list {
          plist_bgp179 except;
        }
        destination-port bgp;
      }
      then {
        reject;
      }
    }
  }
}
```



```

    }
  }
  term 2 {
    then {
      accept;
    }
  }
}
}

user@host# show interfaces
lo0 {
  unit 0 {
    family inet {
      filter {
        input filter_bgp179;
      }
      address 127.0.0.1/32;
    }
  }
}

user@host# show policy-options
prefix-list plist_bgp179 {
  apply-path "protocols bgp group <*> neighbor <*>";
}

```

If you are done configuring the device, enter **commit** from configuration mode.

Repeat the procedure, where appropriate, for every BGP-enabled device in the network, using the appropriate interface names and addresses for each BGP-enabled device.

### Verification

Confirm that the configuration is working properly.

### Displaying the Firewall Filter Applied to the Loopback Interface

**Purpose** Verify that the firewall filter **filter\_bgp179** is applied to the IPv4 input traffic at logical interface **lo0.0**.

**Action** Use the **show interfaces statistics** operational mode command for logical interface **lo0.0**, and include the **detail** option. Under the **Protocol inet** section of the command output section, the **Input Filters** field displays the name of the stateless firewall filter applied to the logical interface in the input direction:

```

[edit]
user@host> show interfaces statistics lo0.0 detail
Logical interface lo0.0 (Index 321) (SNMP ifIndex 16) (Generation 130)
Flags: SNMP-Traps Encapsulation: Unspecified
Traffic statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Local statistics:
  Input bytes : 0
  Output bytes : 0

```



```
Input packets:          0
Output packets:         0
Transit statistics:
Input bytes :           0          0 bps
Output bytes :          0          0 bps
Input packets:          0          0 pps
Output packets:         0          0 pps
Protocol inet, MTU: Unlimited, Generation: 145, Route table: 0
  Flags: Sendbroadcast-pkt-to-re
  Input Filters: filter_bgp179
  Addresses, Flags: Primary
    Destination: Unspecified, Local: 127.0.0.1, Broadcast: Unspecified,
    Generation: 138
```

---

### Example: Limiting TCP Segment Size for BGP

This example shows how to avoid Internet Control Message Protocol (ICMP) vulnerability issues by limiting TCP segment size when you are using maximum transmission unit (MTU) discovery. Using MTU discovery on TCP paths is one method of avoiding BGP packet fragmentation.

- [Requirements on page 2940](#)
- [Overview on page 2940](#)
- [Configuration on page 2941](#)
- [Verification on page 2943](#)
- [Troubleshooting on page 2943](#)

#### **Requirements**

No special configuration beyond device initialization is required before you configure this example.

#### **Overview**

TCP negotiates a maximum segment size (MSS) value during session connection establishment between two peers. The MSS value negotiated is primarily based on the maximum transmission unit (MTU) of the interfaces to which the communicating peers are directly connected. However, due to variations in link MTU on the path taken by the TCP packets, some packets in the network that are well within the MSS value might be fragmented when the packet size exceeds the link's MTU.

To configure the TCP MSS value, include the **tcp-mss** statement with a segment size from 1 through 4096.

If the router receives a TCP packet with the SYN bit and the MSS option set, and the MSS option specified in the packet is larger than the MSS value specified by the **tcp-mss** statement, the router replaces the MSS value in the packet with the lower value specified by the **tcp-mss** statement.

The configured MSS value is used as the maximum segment size for the sender. The assumption is that the TCP MSS value used by the sender to communicate with the BGP neighbor is the same as the TCP MSS value that the sender can accept from the BGP neighbor. If the MSS value from the BGP neighbor is less than the MSS value configured,




the MSS value from the BGP neighbor is used as the maximum segment size for the sender.

This feature is supported with TCP over IPv4 and TCP over IPv6.

### Topology Diagram

Figure 82 on page 2941 shows the topology used in this example.

**Figure 82: TCP Maximum Segment Size for BGP**

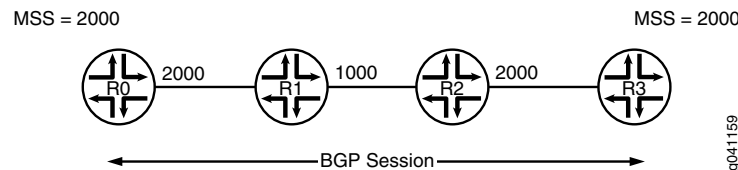

### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
R0
set interfaces fe-1/2/0 unit 1 family inet address 1.1.0.1/30
set interfaces lo0 unit 1 family inet address 10.255.14.179/32
set protocols bgp group-int tcp-mss 2020
set protocols bgp group int type internal
set protocols bgp group int local-address 10.255.14.179
set protocols bgp group int mtu-discovery
set protocols bgp group int neighbor 10.255.71.24 tcp-mss 2000
set protocols bgp group int neighbor 10.255.14.177
set protocols bgp group int neighbor 10.0.14.4 tcp-mss 4000
set protocols ospf area 0.0.0.0 interface fe-1/2/0.1
set protocols ospf area 0.0.0.0 interface 10.255.14.179
set routing-options autonomous-system 65000
```

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Router R0:

1. Configure the interfaces.  

```
[edit interfaces]
user@R0# set fe-1/2/0 unit 1 family inet address 1.1.0.1/30
user@R0# set lo0 unit 1 family inet address 10.255.14.179/32
```
2. Configure an interior gateway protocol (IGP), OSPF in this example.  

```
[edit protocols ospf area 0.0.0.0]
user@R0# set interface fe-1/2/0.1
user@R0# set interface 10.255.14.179
```
3. Configure one or more BGP groups.  

```
[edit protocols bgp group int]
```



```
user@R0# set type internal
user@R0# set local-address 10.255.14.179
```

4. Configure MTU discovery to prevent packet fragmentation.

```
[edit protocols bgp group int]
user@R0# set mtu-discovery
```

5. Configure the BGP neighbors, with the TCP MSS set globally for the group or specifically for the various neighbors.

```
[edit protocols bgo group int]
user@R0# set tcp-mss 2020
user@R0# set neighbor 10.255.14.177
user@R0# set neighbor 10.255.71.24 tcp-mss 2000
user@R0# set neighbor 10.0.14.4 tcp-mss 4000
```



**NOTE:** The TCP MSS neighbor setting overrides the group setting.

6. Configure the local autonomous system.

```
[edit routing-options]
user@R0# set autonomous-system 65000
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R0# show interfaces
fe-1/2/0 {
  unit 1 {
    family inet {
      address 1.1.0.1/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 10.255.14.179/32;
    }
  }
}

user@R0# show protocols
bgp {
  group int {
    type internal;
    local-address 10.255.14.179;
    mtu-discovery;
    tcp-mss 2020;
    neighbor 10.255.71.24 {
      tcp-mss 2000;
    }
  }
}
```



```

        neighbor 10.255.14.177;
        neighbor 10.0.14.4 {
            tcp-mss 4000;
        }
    }
}
ospf {
    area 0.0.0.0 {
        interface fe-1/2/0.1;
        interface 10.255.14.179;
    }
}

user@R0# show routing-options
autonomous-system 65000;

```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

To confirm that the configuration is working properly, run the following commands:

- **show system connections extensive | find <neighbor-address>**, to check the negotiated TCP MSS value.
- **monitor traffic interface**, to monitor BGP traffic and to make sure that the configured TCP MSS value is used as the MSS option in the TCP SYN packet.

### Troubleshooting

- [MSS Calculation with MTU Discovery on page 2943](#)

#### MSS Calculation with MTU Discovery

**Problem** Consider an example in which two routing devices (R1 and R2) have an internal BGP (IBGP) connection. On both of the routers, the connected interfaces have 4034 as the IPv4 MTU.

```

user@R1# show protocols bgp | display set
[edit]
set protocols bgp group ibgp type internal
set protocols bgp group ibgp local-address 45.45.45.2
set protocols bgp group ibgp mtu-discovery
set protocols bgp group ibgp neighbor 45.45.45.1

```

```

user@R1# run show interfaces xe-0/0/3 extensive | match mtu

```

```

Link-level type: Ethernet, MTU: 4048, LAN-PHY mode, Speed: 10Gbps,
FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Protocol inet, MTU: 4034, Generation: 180, Route table: 0
Protocol multiservice, MTU: Unlimited, Generation: 181, Route table: 0

```

In the following packet capture on Device R1, the negotiated MSS is 3994. In the **show system connections extensive** information for MSS, it is set to 2048.

```

05:50:01.575218 Out
Juniper PCAP Flags [Ext], PCAP Extension(s) total length 16
Device Media Type Extension TLV #3, length 1, value: Ethernet (1)

```



```

    Logical Interface Encapsulation Extension TLV #6, length 1, value:
Ethernet (14)
    Device Interface Index Extension TLV #1, length 2, value: 137
    Logical Interface Index Extension TLV #4, length 4, value: 69
    -----original packet-----
    00:21:59:e1:e8:03 > 00:19:e2:20:79:01, ethertype IPv4 (0x0800), length
78: (tos 0xc0, ttl 64, id 53193, offset 0, flags [DF], proto: TCP (6), length:
64) 45.45.45.2.62840 > 45.45.45.1.bgp: S 2939345813:2939345813(0) win 16384 **mss
3994,nop,wscale 0,nop,nop,timestamp 70559970 0,sackOK,eol>
05:50:01.575875 In
    Juniper PCAP Flags [Ext, no-L2, In], PCAP Extension(s) total length 16
    Device Media Type Extension TLV #3, length 1, value: Ethernet (1)
    Logical Interface Encapsulation Extension TLV #6, length 1, value:
Ethernet (14)
    Device Interface Index Extension TLV #1, length 2, value: 137
    Logical Interface Index Extension TLV #4, length 4, value: 69
    -----original packet-----
    PFE proto 2 (ipv4): (tos 0xc0, ttl 255, id 37709, offset 0, flags [DF], proto:
TCP (6), length: 64) 45.45.45.1.bgp > 45.45.45.2.62840: S 2634967984:2634967984(0)
ack 2939345814 win 16384 **mss 3994,nop,wscale 0,nop,nop,timestamp 174167273
70559970,sackOK,eol>

```

```
user@R1# run show system connections extensive | find 45.45
```

```

tcp4          0      0 45.45.45.2.62840          45.45.45.1.179
                ESTABLISHED
    sndsbcc:          0 sndsbmbcnt:          0 sndsbmbmax:        131072
    sndsblowat:       2048 sndsbhiwat:        16384
    rcvsbcc:          0 rcvsbmbcnt:          0 rcvsbmbmax:        131072
    rcvsblowat:       1 rcvsbhiwat:        16384
    proc id:         19725 proc name:         rpd
        iss: 2939345813      sndup: 2939345972
    snduna: 2939345991      sndnxt: 2939345991      sndwnd:        16384
    sndmax: 2939345991      sndcwnd:        10240 sndssthresh: 1073725440
    irs: 2634967984      rcvup: 2634968162
    rcvnxt: 2634968162      rcvadv: 2634984546      rcvwnd:        16384
    rtt:              0      srtt:          1538      rttv:          1040
    rxtcur:           1200      rxtshift:          0      rtseq: 2939345972
    rttmin:           1000 mss:              2048

```

**Solution** This is expected behavior with Junos OS. The MSS value is equal to the MTU value minus the IP or IPv6 and TCP headers. This means that the MSS value is generally 40 bytes less than the MTU (for IPv4) and 60 bytes less than the MTU (for IPv6). This value is negotiated between the peers. In this example, it is  $4034 - 40 = 3994$ . Junos OS then rounds this value to a multiple of 2 KB. The value is  $3994 / 2048 * 2048 = 2048$ . So it is not necessary to see same MSS value with in the **show system connections** output.

$3994 / 2048 = 1.95$

1.95 is rounded to 1.

$1 * 2048 = 2048$

#### Related Documentation

- [Understanding External BGP Peering Sessions on page 2643](#)
- [BGP Configuration Overview](#)



---

## BGP Flap Configuration

---

- [Example: Preventing BGP Session Resets on page 2945](#)
- [Examples: Configuring BGP Flap Damping on page 2952](#)

### Example: Preventing BGP Session Resets

- [Understanding BGP Session Resets on page 2945](#)
- [Example: Preventing BGP Session Flaps When VPN Families Are Configured on page 2945](#)

---

#### Understanding BGP Session Resets

---

Certain configuration actions and events cause BGP sessions to be reset (dropped and then reestablished).

If you configure both route reflection and VPNs on the same routing device, the following modifications to the route reflection configuration cause current BGP sessions to be reset:

- Adding a cluster ID—If a BGP session shares the same autonomous system (AS) number with the group where you add the cluster ID, all BGP sessions are reset regardless of whether the BGP sessions are contained in the same group.
- Creating a new route reflector—If you have an internal BGP (IBGP) group with an AS number and create a new route reflector group with the same AS number, all BGP sessions in the IBGP group and the new route reflector group are reset.
- Changing configuration statements that affect BGP peers, such as renaming a BGP group, resets the BGP sessions.
- If you change the address family specified in the **[edit protocols bgp family]** hierarchy level, all current BGP sessions on the routing device are dropped and then reestablished.

---

#### Example: Preventing BGP Session Flaps When VPN Families Are Configured

---

This example shows a workaround for a known issue in which BGP sessions sometimes go down and then come back up (in other words, flap) when virtual private network (VPN) families are configured. If any VPN family (for example, **inet-vpn**, **inet6-vpn**, **inet-mpvn**, **inet-mdt**, **inet6-mpvn**, **l2vpn**, **iso-vpn**, and so on) is configured on a BGP master instance, a flap of either a route reflector (RR) internal BGP (IBGP) session or an external BGP (EBGP) session causes flaps of other BGP sessions configured with the same VPN family.

- [Requirements on page 2946](#)
- [Overview on page 2947](#)
- [Configuration on page 2948](#)
- [Verification on page 2951](#)



### ***Requirements***

Before you begin:

- Configure router interfaces.
- Configure an interior gateway protocol (IGP).
- Configure BGP.
- Configure VPNs.



### Overview

When a router or switch is configured as either a route reflector (RR) or an AS boundary router (an external BGP peer) and a VPN family (for example, the **family inet-vpn unicast** statement) is configured, a flap of either the RR IBGP session or the EBGP session causes flaps of all other BGP sessions that are configured with the **family inet-vpn unicast** statement. This example shows how to prevent these unnecessary session flaps.

The reason for the flapping behavior is related to BGP operation in Junos OS when originating VPN routes.

BGP has the following two modes of operation with respect to originating VPN routes:

- If BGP does not need to propagate VPN routes because the session has no EBGP peer and no RR clients, BGP exports VPN routes directly from the **instance.inet.0** routing table to other PE routers. This behavior is efficient in that it avoids the creation of two copies of many routes (one in the **instance.inet.0** table and one in the **bgp.l3vpn.0** table).
- If BGP does need to propagate VPN routes because the session has an EBGP peer or RR clients, BGP first exports the VPN routes from the **instance.inet.0** table to the **bgp.l3vpn.0** table. Then BGP exports the routes to other PE routers. In this scenario, two copies of the route are needed to enable best-route selection. A PE router might receive the same VPN route from a CE device and also from an RR client or EBGP peer.

When, because of a configuration change, BGP transitions from needing two copies of a route to not needing two copies of a route (or the reverse), all sessions over which VPN routes are exchanged go down and then come back up. Although this example focuses on the **family inet-vpn unicast** statement, the concept applies to all VPN network layer reachability information (NLRI) families. This issue impacts logical systems as well. All BGP sessions in the master instance related to the VPN NLRI family are brought down to implement the table advertisement change for the VPN NLRI family. Changing an RR to a non-RR or the reverse (by adding or removing the **cluster** statement) causes the table advertisement change. Also, configuring the first EBGP session or removing the EBGP session from the configuration in the master instance for a VPN NLRI family causes the table advertisement change.

The way to prevent these unnecessary session flaps is to configure an extra RR client or EBGP session as a passive session with a neighbor address that does not exist. This example focuses on the EBGP case, but the same workaround works for the RR case.

When a session is passive, the routing device does not send Open requests to a peer. Once you configure the routing device to be passive, the routing device does not originate the TCP connection. However, when the routing device receives a connection from the peer and an Open message, it replies with another BGP Open message. Each routing device declares its own capabilities.

[Figure 83 on page 2948](#) shows the topology for the EBGP case. Router R1 has an IBGP session with Routers R2 and R3 and an EBGP session with Router R4. All sessions have the **family inet-vpn unicast** statement configured. If the R1-R4 EBGP session flaps, the R1-R2 and R1-R3 BGP sessions flap also.



Figure 83: Topology for the EBGP Case


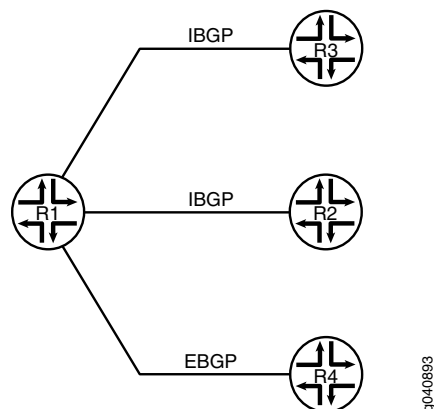


Figure 84 on page 2948 shows the topology for the RR case. Router R1 is the RR, and Router R3 is the client. Router R1 has IBGP sessions with Routers R2 and R3. All sessions have the **family inet-vpn unicast** statement configured. If the R1-R3 session flaps, the R1-R2 and R1-R4 sessions flap also.

Figure 84: Topology for the RR Case

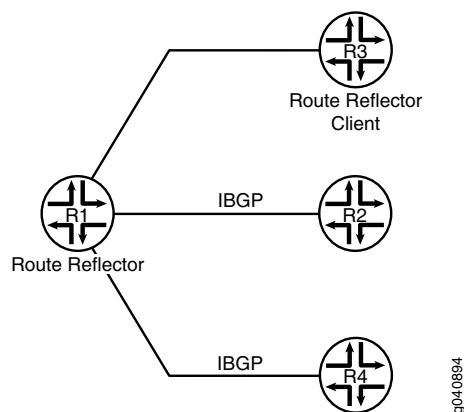

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set protocols bgp family inet-vpn unicast
set protocols bgp family l2vpn signaling
set protocols bgp group R1-R4 type external
set protocols bgp group R1-R4 local-address 4.4.4.2
set protocols bgp group R1-R4 neighbor 4.4.4.1 peer-as 200
set protocols bgp group R1-R2-R3 type internal
set protocols bgp group R1-R2-R3 log-updown
set protocols bgp group R1-R2-R3 local-address 15.15.15.15
set protocols bgp group R1-R2-R3 neighbor 12.12.12.12
set protocols bgp group R1-R2-R3 neighbor 13.13.13.13
set protocols bgp group Fake type external
```



```
set protocols bgp group Fake passive
set protocols bgp group Fake neighbor 100.100.100.100 peer-as 500
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure the EBGp scenario:

1. Configure one or more VPN families.

```
[edit protocols bgp]
user@R1# set family inet-vpn unicast
user@R1# set family l2vpn signaling
```

2. Configure the EBGp session.

```
[edit protocols bgp]
user@R1# set group R1-R4 type external
user@R1# set group R1-R4 local-address 4.4.4.2
user@R1# set group R1-R4 neighbor 4.4.4.1 peer-as 200
```

3. Configure the IBGP sessions.

```
[edit protocols bgp]
user@R1# set group R1-R2-R3 type internal
user@R1# set group R1-R2-R3 local-address 15.15.15.15
user@R1# set group R1-R2-R3 neighbor 12.12.12.12
user@R1# set group R1-R2-R3 neighbor 13.13.13.13
```

4. (Optional) Configure BGP so that it generates a **syslog** message whenever a BGP peer makes a state transition.

```
[edit protocols bgp]
user@R1# set group R1-R2-R3 log-updown
```

Enabling the **log-updown** statement causes BGP state transitions to be logged at **warning** level.

**Step-by-Step Procedure** To verify that unnecessary session flaps are occurring:

1. Run the **show bgp summary** command to verify that the sessions have been established.

```
user@R1> show bgp summary
Groups: 2 Peers: 3 Down peers: 0
Table Tot Paths Act Paths Suppressed History Damp State Pending
bgp.13vpn.0 0 0 0 0 0 0
bgp.12vpn.0 0 0 0 0 0 0
inet.0 0 0 0 0 0 0
Peer AS InPkt OutPkt OutQ Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
4.4.4.1 200 6 5 0 0 1:08 Establ
bgp.13vpn.0: 0/0/0/0
bgp.12vpn.0: 0/0/0/0
12.12.12.12 100 3 7 0 0 1:18 Establ
bgp.13vpn.0: 0/0/0/0
bgp.12vpn.0: 0/0/0/0
13.13.13.13 100 3 6 0 0 1:14 Establ
```



```

bgp.13vpn.0: 0/0/0/0
bgp.12vpn.0: 0/0/0/0

```

2. Deactivate the EBGp session.

```

user@R1# deactivate group R1-R4
user@R1# commit

```

```

Mar 10 18:27:40 R1: rpd[1464]: bgp_peer_delete:6589: NOTIFICATION sent to
4.4.4.1 (External AS 200): code 6 (Cease) subcode 3 (Peer Unconfigured),
Reason: Peer Deletion
Mar 10 18:27:40 R1: rpd[1464]: bgp_adv_main_update:7253: NOTIFICATION sent
to 12.12.12.12 (Internal AS 100): code 6 (Cease) subcode 6 (Other
Configuration Change), Reason: Configuration change - VPN table advertise
Mar 10 18:27:40 R1: rpd[1464]: bgp_adv_main_update:7253: NOTIFICATION sent
to 13.13.13.13 (Internal AS 100): code 6 (Cease) subcode 6 (Other
Configuration Change), Reason: Configuration change - VPN table advertise

```

3. Run the **show bgp summary** command to view the session flaps.

```

user@R1> show bgp summary
Groups: 1 Peers: 2 Down peers: 2
Table Tot Paths Act Paths Suppressed History Damp State Pending
bgp.13vpn.0 0 0 0 0 0 0 0
bgp.12vpn.0 0 0 0 0 0 0 0
inet.0 0 0 0 0 0 0 0
Peer AS InPkt OutPkt OutQ Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
12.12.12.12 100 4 9 0 1 19 Active
13.13.13.13 100 4 8 0 1 19 Active

user@R1> show bgp summary
Groups: 1 Peers: 2 Down peers: 0
Table Tot Paths Act Paths Suppressed History Damp State Pending
bgp.13vpn.0 0 0 0 0 0 0 0
bgp.12vpn.0 0 0 0 0 0 0 0
inet.0 0 0 0 0 0 0 0
Peer AS InPkt OutPkt OutQ Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
12.12.12.12 100 2 3 0 1 0 Estab1
bgp.13vpn.0: 0/0/0/0
bgp.12vpn.0: 0/0/0/0
13.13.13.13 100 2 3 0 1 0 Estab1
bgp.13vpn.0: 0/0/0/0
bgp.12vpn.0: 0/0/0/0

```

#### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To prevent unnecessary BGP session flaps:

1. Add a passive EBGp session with a neighbor address that does not exist in the peer autonomous system (AS).

```

[edit protocols bgp]
user@R1# set group Fake type external
user@R1# set group Fake passive
user@R1# set neighbor 100.100.100.100 peer-as 500

```



- Run the **show bgp summary** command to verify that the real sessions have been established and the passive session is idle.

```

user@R1> show bgp summary
Groups: 3 Peers: 4 Down peers: 1
Table Tot Paths Act Paths Suppressed History Damp State Pending
bgp.13vpn.0 0 0 0 0 0 0 0
bgp.12vpn.0 0 0 0 0 0 0 0
Peer AS InPkt OutPkt OutQ Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
4.4.4.1 200 9500 9439 0 0 2d 23:14:23 Estab1
bgp.13vpn.0: 0/0/0/0
bgp.12vpn.0: 0/0/0/0
12.12.12.12 100 10309 10239 0 0 3d 5:17:49 Estab1
bgp.13vpn.0: 0/0/0/0
13.13.13.13 100 10306 10241 0 0 3d 5:18:25 Estab1
bgp.13vpn.0: 0/0/0/0
100.100.100.100 500 0 0 0 0 2d 23:38:52 Idle

```

### Verification

Confirm that the configuration is working properly.

- [Bringing Down the EBGp Session on page 2951](#)
- [Verifying That the IBGP Sessions Remain Up on page 2951](#)

### Bringing Down the EBGp Session

**Purpose** Try to cause the flap issue after the workaround is configured.

**Action** user@R1# deactivate group R1-R4  
user@R1# commit

### Verifying That the IBGP Sessions Remain Up

**Purpose** Make sure that the IBGP sessions do not flap after the EBGp session is deactivated.



```

Action user@R1> show bgp summary
Groups: 2 Peers: 3 Down peers: 1
Table Tot Paths Act Paths Suppressed History Damp State Pending
bgp.13vpn.0 0 0 0 0 0 0
bgp.12vpn.0 0 0 0 0 0 0
Peer AS InPkt OutPkt OutQ Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
12.12.12.12 100 10312 10242 0 0 3d 5:19:01 Establ
bgp.13vpn.0: 0/0/0/0
13.13.13.13 100 10309 10244 0 0 3d 5:19:37 Establ
bgp.13vpn.0: 0/0/0/0
100.100.100.100 500 0 0 0 0 2d 23:40:04 Idle

user@R1> show bgp summary
Groups: 3 Peers: 4 Down peers: 1
Table Tot Paths Act Paths Suppressed History Damp State Pending
bgp.13vpn.0 0 0 0 0 0 0
bgp.12vpn.0 0 0 0 0 0 0
Peer AS InPkt OutPkt OutQ Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
4.4.4.1 200 5 4 0 0 28 Establ
bgp.13vpn.0: 0/0/0/0
bgp.12vpn.0: 0/0/0/0
12.12.12.12 100 10314 10244 0 0 3d 5:19:55 Establ
bgp.13vpn.0: 0/0/0/0
13.13.13.13 100 10311 10246 0 0 3d 5:20:31 Establ
bgp.13vpn.0: 0/0/0/0
100.100.100.100 500 0 0 0 0 2d 23:40:58 Idle

```

- Related Documentation**
- [Understanding External BGP Peering Sessions on page 2643](#)
  - [BGP Configuration Overview](#)

## Examples: Configuring BGP Flap Damping

- [Understanding Damping Parameters on page 2952](#)
- [Example: Configuring Damping Parameters on page 2953](#)
- [Example: Configuring BGP Route Flap Damping Based on the MBGP MVPN Address Family on page 2956](#)

### Understanding Damping Parameters

BGP *route flapping* describes the situation in which BGP systems send an excessive number of update messages to advertise network reachability information. BGP *flap damping* is a method of reducing the number of update messages sent between BGP peers, thereby reducing the load on these peers, without adversely affecting the route convergence time for stable routes.

Flap damping reduces the number of update messages by marking routes as ineligible for selection as the active or preferable route. Marking routes in this way leads to some delay, or *suppression*, in the propagation of route information, but the result is increased network stability. You typically apply flap damping to external BGP (EBGP) routes (routes in different ASs). You can also apply flap damping within a confederation, between confederation member ASs. Because routing consistency within an AS is important, do



not apply flap damping to internal BGP (IBGP) routes. (If you do, it is ignored.) The exception to this rule is when flap damping is applied at the address family level, which is supported in Junos OS Release 12.2 and later. When you apply flap damping at the address family level, it works for both IBGP and EBGP.

By default, route flap damping is not enabled. Damping is applied to external peers and to peers at confederation boundaries.

When you enable damping, default parameters are applied, as summarized in [Table 204 on page 2953](#).

**Table 204: Damping Parameters**

Damping Parameter	Description	Default Value	Possible Values
<b>half-life <i>minutes</i></b>	Decay half-life—Number of minutes after which an arbitrary value is halved if a route stays stable.	<b>15 (minutes)</b>	1 through 4
<b>max-suppress <i>minutes</i></b>	Maximum hold-down time for a route, in minutes.	<b>60 (minutes)</b>	1 through 720
<b>reuse</b>	Reuse threshold—Arbitrary value below which a suppressed route can be used again.	<b>750</b>	1 through 20,000
<b>suppress</b>	Cutoff (suppression) threshold—Arbitrary value above which a route can no longer be used or included in advertisements.	<b>3000</b>	1 through 20,000

To change the default BGP flap damping values, you define actions by creating a named set of damping parameters and including it in a routing policy with the damping action. For the damping routing policy to work, you also must enable BGP route flap damping.

### **Example: Configuring Damping Parameters**

This example shows how to configure damping parameters.

- [Requirements on page 2953](#)
- [Overview on page 2953](#)
- [Configuration on page 2954](#)
- [Verification on page 2956](#)

#### **Requirements**

Before you begin, configure router interfaces and configure routing protocols, as explained in [Routing Policies Configuration Overview](#).

#### **Overview**

In this example, you configure a routing policy called `policy1` and a corresponding routing term called `term1`. Within the term, you configure the route filter to include source routes greater than or equal to `10.210.0.0/16` and destination routes greater than or equal to `10.215.0.0/16`. Then you group the source and destination prefixes into a forwarding class called `forwarding-class1` and apply `policy1` to the forwarding table. The routing policy is



evaluated when routes are being exported from the routing table into the forwarding table. Only the active routes are exported from the routing table.

### *Configuration*

#### **CLI Quick Configuration**

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set policy-options policy-statement dampenpolicy1 term dampenterm1 from route-filter 172.16.0.0/12 orlonger damping group1
set policy-options policy-statement dampenpolicy1 term dampenterm1 from route-filter 192.168.0.0/16 orlonger
set policy-options policy-statement dampenpolicy1 term dampenterm1 from route-filter 10.0.0.0/8 orlonger
set policy-options policy-statement test term 1 from protocol direct
set policy-options damping group1 half-life 30
set policy-options damping group1 reuse 750
set policy-options damping group1 suppress 3000
set policy-options damping group1 max-suppress 60
set policy-options damping group2 half-life 40
set policy-options damping group2 reuse 1000
set policy-options damping group2 suppress 400
set policy-options damping group2 max-suppress 45
set policy-options damping group3 disable
set protocols bgp damping
set protocols bgp group groupA neighbor 172.16.15.14 import dampenpolicy1
```

#### **Step-by-Step Procedure**

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure damping parameters:

1. Specify the routes to dampen and associate each group of routes with a group name.

```
[edit policy-options policy-statement dampenpolicy1 term dampenterm1]
user@host# set from route-filter 172.16.0.0/12 orlonger damping group1
user@host# set from route-filter 192.168.0.0/16 orlonger
user@host# set from route-filter 10.0.0.0/8 orlonger
```

2. Create and configure the damping parameter groups.

```
[edit policy-options damping]
user@host# set group1 half-life 30 max-suppress 60 reuse 750 suppress 3000
user@host# set group2 half-life 40 max-suppress 45 reuse 1000 suppress 400
user@host# set group3 disable
```

3. Enable damping for BGP.

```
[edit]
user@host# set protocols bgp damping
```



4. Apply the policy as an import policy for the BGP neighbor.

```
[edit ]
user@host# set protocols bgp group groupA neighbor 172.16.15.14 import
dampenpolicy1
```



**NOTE:** You can refer to the same routing policy one or more times in the same or different import statement.

**Results** Confirm your configuration by entering the **show policy-options** and **show protocols bgp** commands from configuration mode. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
user@host# show policy-options
policy-statement dampenpolicy1 {
  term dampenterm1 {
    from {
      route-filter 172.16.0.0/12 orlonger damping group1;
      route-filter 192.168.0.0/16 orlonger;
      route-filter 10.0.0.0/8 orlonger;
    }
  }
}
damping group1 {
  half-life 30;
  reuse 750;
  suppress 3000;
  max-suppress 60;
}
damping group2 {
  half-life 40;
  reuse 1000;
  suppress 400;
  max-suppress 45;
}
damping group3 {
  disable;
}

user@host# show protocols bgp
damping;
group groupA {
  neighbor 172.16.15.14 {
    import dampenpolicy1;
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.



**Verification**

Confirm that the configuration is working properly.

- [Verifying the Damping Parameters on page 2956](#)
- [Verifying the Routing Policy on page 2956](#)

**Verifying the Damping Parameters**

**Purpose** Verify that the policy and term are configured on the device and that the appropriate damping parameters are specified within the term.

**Action** From operational mode, enter the **show policy-options** command.

**Verifying the Routing Policy**

**Purpose** Verify that damping is enabled for BGP and that the routing policy is applied to the routing protocol.

**Action** From operational mode, enter the **show protocols bgp** command.

**Example: Configuring BGP Route Flap Damping Based on the MBGP MVPN Address Family**

---

This example shows how to configure an multiprotocol BGP multicast VPN (also called Next-Generation MVPN) with BGP route flap damping.

- [Requirements on page 2956](#)
- [Overview on page 2956](#)
- [Configuration on page 2957](#)
- [Verification on page 2965](#)

**Requirements**

This example uses Junos OS Release 12.2. BGP route flap damping support for MBGP MVPN, specifically, and on an address family basis, in general, is introduced in Junos OS Release 12.2.

**Overview**


BGP route flap damping helps to diminish route instability caused by routes being repeatedly withdrawn and readvertised when a link is intermittently failing.

This example uses the default damping parameters and demonstrates an MBGP MVPN scenario with three provider edge (PE) routing devices, three customer edge (CE) routing devices, and one provider (P) routing device.

[Figure 85 on page 2957](#) shows the topology used in this example.



Figure 85: MBGP MVPN with BGP Route Flap Damping

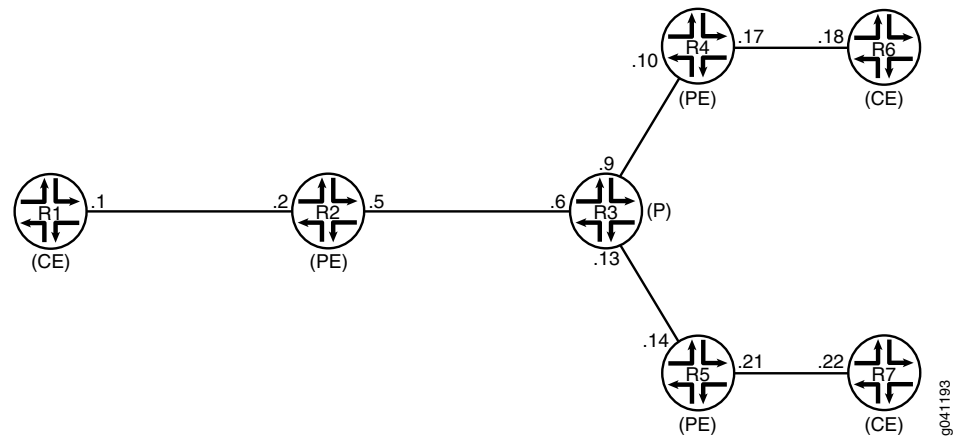

On PE Device R4, BGP route flap damping is configured for address family `inet-mvpn`. A routing policy called `dampPolicy` uses the `nlri-route-type` match condition to damp only MVPN route types 3, 4, and 5. All other MVPN route types are not damped.

This example shows the full configuration on all devices in the “[CLI Quick Configuration](#)” on page 2957 section. The “[Configuring Device R4](#)” on page 2960 section shows the step-by-step configuration for PE Device R4.

### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```
set interfaces ge-1/2/0 unit 1 family inet address 10.1.1.1/30
set interfaces ge-1/2/0 unit 1 family mpls
set interfaces lo0 unit 1 family inet address 1.1.1.1/32
set protocols ospf area 0.0.0.0 interface lo0.1 passive
set protocols ospf area 0.0.0.0 interface ge-1/2/0.1
set protocols pim rp static address 100.1.1.2
set protocols pim interface all
set routing-options router-id 1.1.1.1
```

**Device R2**

```
set interfaces ge-1/2/0 unit 2 family inet address 10.1.1.2/30
set interfaces ge-1/2/0 unit 2 family mpls
set interfaces ge-1/2/1 unit 5 family inet address 10.1.1.5/30
set interfaces ge-1/2/1 unit 5 family mpls
set interfaces vt-1/2/0 unit 2 family inet
set interfaces lo0 unit 2 family inet address 1.1.1.2/32
set interfaces lo0 unit 102 family inet address 100.1.1.2/32
set protocols mpls interface ge-1/2/1.5
set protocols bgp group ibgp type internal
set protocols bgp group ibgp local-address 1.1.1.2
set protocols bgp group ibgp family inet-vpn any
set protocols bgp group ibgp family inet-mvpn signaling
set protocols bgp group ibgp neighbor 1.1.1.4
set protocols bgp group ibgp neighbor 1.1.1.5
```



```
set protocols ospf area 0.0.0.0 interface lo0.2 passive
set protocols ospf area 0.0.0.0 interface ge-1/2/1.5
set protocols ldp interface ge-1/2/1.5
set protocols ldp p2mp
set policy-options policy-statement parent_vpn_routes from protocol bgp
set policy-options policy-statement parent_vpn_routes then accept
set routing-instances vpn-1 instance-type vrf
set routing-instances vpn-1 interface ge-1/2/0.2
set routing-instances vpn-1 interface vt-1/2/0.2
set routing-instances vpn-1 interface lo0.102
set routing-instances vpn-1 route-distinguisher 100:100
set routing-instances vpn-1 provider-tunnel ldp-p2mp
set routing-instances vpn-1 vrf-target target:1:1
set routing-instances vpn-1 protocols ospf export parent_vpn_routes
set routing-instances vpn-1 protocols ospf area 0.0.0.0 interface lo0.102 passive
set routing-instances vpn-1 protocols ospf area 0.0.0.0 interface ge-1/2/0.2
set routing-instances vpn-1 protocols pim rp static address 100.1.1.2
set routing-instances vpn-1 protocols pim interface ge-1/2/0.2 mode sparse
set routing-instances vpn-1 protocols mvpn
set routing-options router-id 1.1.1.2
set routing-options autonomous-system 1001
```

Device R3

```
set interfaces ge-1/2/0 unit 6 family inet address 10.1.1.6/30
set interfaces ge-1/2/0 unit 6 family mpls
set interfaces ge-1/2/1 unit 9 family inet address 10.1.1.9/30
set interfaces ge-1/2/1 unit 9 family mpls
set interfaces ge-1/2/2 unit 13 family inet address 10.1.1.13/30
set interfaces ge-1/2/2 unit 13 family mpls
set interfaces lo0 unit 3 family inet address 1.1.1.3/32
set protocols mpls interface ge-1/2/0.6
set protocols mpls interface ge-1/2/1.9
set protocols mpls interface ge-1/2/2.13
set protocols ospf area 0.0.0.0 interface lo0.3 passive
set protocols ospf area 0.0.0.0 interface ge-1/2/0.6
set protocols ospf area 0.0.0.0 interface ge-1/2/1.9
set protocols ospf area 0.0.0.0 interface ge-1/2/2.13
set protocols ldp interface ge-1/2/0.6
set protocols ldp interface ge-1/2/1.9
set protocols ldp interface ge-1/2/2.13
set protocols ldp p2mp
set routing-options router-id 1.1.1.3
```

Device R4

```
set interfaces ge-1/2/0 unit 10 family inet address 10.1.1.10/30
set interfaces ge-1/2/0 unit 10 family mpls
set interfaces ge-1/2/1 unit 17 family inet address 10.1.1.17/30
set interfaces ge-1/2/1 unit 17 family mpls
set interfaces vt-1/2/0 unit 4 family inet
set interfaces lo0 unit 4 family inet address 1.1.1.4/32
set interfaces lo0 unit 104 family inet address 100.1.1.4/32
set protocols rsvp interface all aggregate
set protocols mpls interface all
set protocols mpls interface ge-1/2/0.10
set protocols bgp group ibgp type internal
set protocols bgp group ibgp local-address 1.1.1.4
set protocols bgp group ibgp family inet-vpn unicast
```



```

set protocols bgp group ibgp family inet-vpn any
set protocols bgp group ibgp family inet-mvpn signaling damping
set protocols bgp group ibgp neighbor 1.1.1.2 import dampPolicy
set protocols bgp group ibgp neighbor 1.1.1.5
set protocols ospf traffic-engineering
set protocols ospf area 0.0.0.0 interface all
set protocols ospf area 0.0.0.0 interface lo0.4 passive
set protocols ospf area 0.0.0.0 interface ge-1/2/0.10
set protocols ldp interface ge-1/2/0.10
set protocols ldp p2mp
set policy-options policy-statement dampPolicy term term1 from family inet-mvpn
set policy-options policy-statement dampPolicy term term1 from nlri-route-type 3
set policy-options policy-statement dampPolicy term term1 from nlri-route-type 4
set policy-options policy-statement dampPolicy term term1 from nlri-route-type 5
set policy-options policy-statement dampPolicy term term1 then accept
set policy-options policy-statement dampPolicy then damping no-damp
set policy-options policy-statement dampPolicy then accept
set policy-options policy-statement parent_vpn_routes from protocol bgp
set policy-options policy-statement parent_vpn_routes then accept
set policy-options damping no-damp disable
set routing-instances vpn-1 instance-type vrf
set routing-instances vpn-1 interface vt-1/2/0.4
set routing-instances vpn-1 interface ge-1/2/1.17
set routing-instances vpn-1 interface lo0.104
set routing-instances vpn-1 route-distinguisher 100:100
set routing-instances vpn-1 vrf-target target:1:1
set routing-instances vpn-1 protocols ospf export parent_vpn_routes
set routing-instances vpn-1 protocols ospf area 0.0.0.0 interface lo0.104 passive
set routing-instances vpn-1 protocols ospf area 0.0.0.0 interface ge-1/2/1.17
set routing-instances vpn-1 protocols pim rp static address 100.1.1.2
set routing-instances vpn-1 protocols pim interface ge-1/2/1.17 mode sparse
set routing-instances vpn-1 protocols mvpn
set routing-options router-id 1.1.1.4
set routing-options autonomous-system 1001

```

**Device R5**

```

set interfaces ge-1/2/0 unit 14 family inet address 10.1.1.14/30
set interfaces ge-1/2/0 unit 14 family mpls
set interfaces ge-1/2/1 unit 21 family inet address 10.1.1.21/30
set interfaces ge-1/2/1 unit 21 family mpls
set interfaces vt-1/2/0 unit 5 family inet
set interfaces lo0 unit 5 family inet address 1.1.1.5/32
set interfaces lo0 unit 105 family inet address 100.1.1.5/32
set protocols mpls interface ge-1/2/0.14
set protocols bgp group ibgp type internal
set protocols bgp group ibgp local-address 1.1.1.5
set protocols bgp group ibgp family inet-vpn any
set protocols bgp group ibgp family inet-mvpn signaling
set protocols bgp group ibgp neighbor 1.1.1.2
set protocols bgp group ibgp neighbor 1.1.1.4
set protocols ospf area 0.0.0.0 interface lo0.5 passive
set protocols ospf area 0.0.0.0 interface ge-1/2/0.14
set protocols ldp interface ge-1/2/0.14
set protocols ldp p2mp
set policy-options policy-statement parent_vpn_routes from protocol bgp
set policy-options policy-statement parent_vpn_routes then accept
set routing-instances vpn-1 instance-type vrf

```



```
set routing-instances vpn-1 interface vt-1/2/0.5
set routing-instances vpn-1 interface ge-1/2/1.21
set routing-instances vpn-1 interface lo0.105
set routing-instances vpn-1 route-distinguisher 100:100
set routing-instances vpn-1 vrf-target target:1:1
set routing-instances vpn-1 protocols ospf export parent_vpn_routes
set routing-instances vpn-1 protocols ospf area 0.0.0.0 interface lo0.105 passive
set routing-instances vpn-1 protocols ospf area 0.0.0.0 interface ge-1/2/1.21
set routing-instances vpn-1 protocols pim rp static address 100.1.1.2
set routing-instances vpn-1 protocols pim interface ge-1/2/1.21 mode sparse
set routing-instances vpn-1 protocols mvpn
set routing-options router-id 1.1.1.5
set routing-options autonomous-system 1001
```

**Device R6**

```
set interfaces ge-1/2/0 unit 18 family inet address 10.1.1.18/30
set interfaces ge-1/2/0 unit 18 family mpls
set interfaces lo0 unit 6 family inet address 1.1.1.6/32
set protocols sap listen 224.1.1.1
set protocols ospf area 0.0.0.0 interface lo0.6 passive
set protocols ospf area 0.0.0.0 interface ge-1/2/0.18
set protocols pim rp static address 100.1.1.2
set protocols pim interface all
set routing-options router-id 1.1.1.6
```

**Device R7**

```
set interfaces ge-1/2/0 unit 22 family inet address 10.1.1.22/30
set interfaces ge-1/2/0 unit 22 family mpls
set interfaces lo0 unit 7 family inet address 1.1.1.7/32
set protocols ospf area 0.0.0.0 interface lo0.7 passive
set protocols ospf area 0.0.0.0 interface ge-1/2/0.22
set protocols pim rp static address 100.1.1.2
set protocols pim interface all
set routing-options router-id 1.1.1.7
```

#### *Configuring Device R4*

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure Device R4:

1. Configure the interfaces.

```
[edit interfaces]
user@R4# set ge-1/2/0 unit 10 family inet address 10.1.1.10/30
user@R4# set ge-1/2/0 unit 10 family mpls
user@R4# set ge-1/2/1 unit 17 family inet address 10.1.1.17/30
user@R4# set ge-1/2/1 unit 17 family mpls
user@R4# set vt-1/2/0 unit 4 family inet
user@R4# set lo0 unit 4 family inet address 1.1.1.4/32
user@R4# set lo0 unit 104 family inet address 100.1.1.4/32
```

2. Configure MPLS and the signaling protocols on the interfaces.

```
[edit protocols]
user@R4# set mpls interface all
```



```

user@R4# set mpls interface ge-1/2/0.10
user@R4# set rsvp interface all aggregate
user@R4# set ldp interface ge-1/2/0.10
user@R4# set ldp p2mp

```

3. Configure BGP.

The BGP configuration enables BGP route flap damping for the **inet-mvpn** address family. The BGP configuration also imports into the routing table the routing policy called **dampPolicy**. This policy is applied to neighbor PE Device R2.

```

[edit protocols bgp group ibgp]
user@R4# set type internal
user@R4# set local-address 1.1.1.4
user@R4# set family inet-vpn unicast
user@R4# set family inet-vpn any
user@R4# set family inet-mvpn signaling damping
user@R4# set neighbor 1.1.1.2 import dampPolicy
user@R4# set neighbor 1.1.1.5

```

4. Configure an interior gateway protocol.

```

[edit protocols ospf]
user@R4# set traffic-engineering
[edit protocols ospf area 0.0.0.0]
user@R4# set interface all
user@R4# set interface lo0.4 passive
user@R4# set interface ge-1/2/0.10

```

5. Configure a damping policy that uses the **nlri-route-type** match condition to damp only MVPN route types 3, 4, and 5.

```

[edit policy-options policy-statement dampPolicy term term1]
user@R4# set from family inet-mvpn
user@R4# set from nlri-route-type 3
user@R4# set from nlri-route-type 4
user@R4# set from nlri-route-type 5
user@R4# set then accept

```

6. Configure the **damping** policy to disable BGP route flap damping.

The **no-damp** policy (**damping no-damp disable**) causes any damping state that is present in the routing table to be deleted. The **then damping no-damp** statement applies the **no-damp** policy as an action and has no **from** match conditions. Therefore, all routes that are not matched by **term1** are matched by this term, with the result that all other MVPN route types are not damped.

```

[edit policy-options policy-statement dampPolicy]
user@R4# set then damping no-damp
user@R4# set then accept
[edit policy-options]
user@R4# set damping no-damp disable

```

7. Configure the **parent\_vpn\_routes** to accept all other BGP routes that are not from the **inet-mvpn** address family.

This policy is applied as an OSPF export policy in the routing instance.

```

[edit policy-options policy-statement parent_vpn_routes]

```



```
user@R4# set from protocol bgp
user@R4# set then accept
```

8. Configure the VPN routing and forwarding (VRF) instance.

```
[edit routing-instances vpn-1]
user@R4# set instance-type vrf
user@R4# set interface vt-1/2/0.4
user@R4# set interface ge-1/2/1.17
user@R4# set interface lo0.104
user@R4# set route-distinguisher 100:100
user@R4# set vrf-target target:1:1
user@R4# set protocols ospf export parent_vpn_routes
user@R4# set protocols ospf area 0.0.0.0 interface lo0.104 passive
user@R4# set protocols ospf area 0.0.0.0 interface ge-1/2/1.17
user@R4# set protocols pim rp static address 100.1.1.2
user@R4# set protocols pim interface ge-1/2/1.17 mode sparse
user@R4# set protocols mvpn
```

9. Configure the router ID and the autonomous system (AS) number.

```
[edit routing-instances vpn-A]
user@R4# set routing-options router-id 1.1.1.4
user@R4# set routing-options autonomous-system 1001
```

10. If you are done configuring the device, commit the configuration.

```
user@R4# commit
```

### Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show routing-instances**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R4# show interfaces
ge-1/2/0 {
  unit 10 {
    family inet {
      address 10.1.1.10/30;
    }
    family mpls;
  }
}
ge-1/2/1 {
  unit 17 {
    family inet {
      address 10.1.1.17/30;
    }
    family mpls;
  }
}
vt-1/2/0 {
  unit 4 {
    family inet;
  }
}
```



```

}
lo0 {
  unit 4 {
    family inet {
      address 1.1.1.4/32;
    }
  }
  unit 104 {
    family inet {
      address 100.1.1.4/32;
    }
  }
}

user@R4# show policy-options
policy-statement dampPolicy {
  term term1 {
    from {
      family inet-mvpn;
      nlri-route-type [ 3 4 5 ];
    }
    then accept;
  }
  then {
    damping no-damp;
    accept;
  }
}
policy-statement parent_vpn_routes {
  from protocol bgp;
  then accept;
}
damping no-damp {
  disable;
}

user@R4# show protocols
rsvp {
  interface all {
    aggregate;
  }
}
mpls {
  interface all;
  interface ge-1/2/0.10;
}
bgp {
  group ibgp {
    type internal;
    local-address 1.1.1.4;
    family inet-vpn {
      unicast;
      any;
    }
  }
  family inet-mvpn {
    signaling {
      damping;
    }
  }
}

```



```
    }
  }
  neighbor 1.1.1.2 {
    import dampPolicy;
  }
  neighbor 1.1.1.5;
}
ospf {
  traffic-engineering;
  area 0.0.0.0 {
    interface all;
    interface lo0.4 {
      passive;
    }
    interface ge-1/2/0.10;
  }
}
ldp {
  interface ge-1/2/0.10;
  p2mp;
}

user@R4# show routing-instances
vpn-1 {
  instance-type vrf;
  interface vt-1/2/0.4;
  interface ge-1/2/1.17;
  interface lo0.104;
  route-distinguisher 100:100;
  vrf-target target:1:1;
  protocols {
    ospf {
      export parent_vpn_routes;
      area 0.0.0.0 {
        interface lo0.104 {
          passive;
        }
        interface ge-1/2/1.17;
      }
    }
    pim {
      rp {
        static {
          address 100.1.1.2;
        }
      }
      interface ge-1/2/1.17 {
        mode sparse;
      }
    }
  }
  mvpn;
}

user@R4# show routing-opts
router-id 1.1.1.4;
```



autonomous-system 1001;

### Verification

Confirm that the configuration is working properly.

- [Verifying That Route Flap Damping Is Disabled on page 2965](#)
- [Verifying Route Flap Damping on page 2965](#)

### Verifying That Route Flap Damping Is Disabled

**Purpose** Verify the presence of the **no-damp** policy, which disables damping for MVPN route types other than 3, 4, and 5.

**Action** From operational mode, enter the **show policy damping** command.

```
user@R4> show policy damping
Default damping information:
  Halflife: 15 minutes
  Reuse merit: 750 Suppress/cutoff merit: 3000
  Maximum suppress time: 60 minutes
  Computed values:
    Merit ceiling: 12110
    Maximum decay: 6193
Damping information for "no-damp":
  Damping disabled
```

**Meaning** The output shows that the default damping parameters are in effect and that the **no-damp** policy is also in effect for the specified route types.

### Verifying Route Flap Damping

**Purpose** Check whether BGP routes have been damped.

**Action** From operational mode, enter the **show bgp summary** command.

```
user@R4> show bgp summary
Groups: 1 Peers: 2 Down peers: 0
Table Tot Paths Act Paths Suppressed History Damp State Pending
bgp.13vpn.0
      6      6      0      0      0      0
bgp.13vpn.2
      0      0      0      0      0      0
bgp.mvpn.0
      2      2      0      0      0      0
Peer AS InPkt OutPkt OutQ Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
1.1.1.2 1001 3159 3155 0 0 23:43:47
Establ
  bgp.13vpn.0: 3/3/3/0
  bgp.13vpn.2: 0/0/0/0
  bgp.mvpn.0: 1/1/1/0
  vpn-1.inet.0: 3/3/3/0
  vpn-1.mvpn.0: 1/1/1/0
1.1.1.5 1001 3157 3154 0 0 23:43:40
Establ
  bgp.13vpn.0: 3/3/3/0
  bgp.13vpn.2: 0/0/0/0
```



```
bgp.mvpn.0: 1/1/1/0
vpn-1.inet.0: 3/3/3/0
vpn-1.mvpn.0: 1/1/1/0
```

**Meaning** When **Damp State** field shows that zero routes in the bgp.mvpn.0 routing table have been damped. Further down, the last number in the State field shows that zero routes have been damped for BGP peer 1.1.1.2.

**Related Documentation**

- [Understanding External BGP Peering Sessions on page 2643](#)
- [BGP Configuration Overview](#)

---

## BGP Monitoring Configuration

- [Example: Configuring BGP Trace Operations on page 2966](#)

### Example: Configuring BGP Trace Operations

- [Understanding Trace Operations for BGP Protocol Traffic on page 2966](#)
- [Example: Viewing BGP Trace Files on Logical Systems on page 2968](#)

---

#### Understanding Trace Operations for BGP Protocol Traffic

You can trace various BGP protocol traffic to help you debug BGP protocol issues. To trace BGP protocol traffic, include the **traceoptions** statement at the **[edit protocols bgp]** hierarchy level. For routing instances, include the **traceoptions** statement at the **[edit routing-instances routing-instance-name protocols bgp]** hierarchy level.

```
traceoptions {
  file filename <files number> <size size> <world-readable | no-world-readable>;
  flag flag <flag-modifier> <disable>;
}
```

You can specify the following BGP protocol-specific trace options using the **flag** statement:

- **4byte-as**—4-byte AS events.
- **bfd**—BFD protocol events.
- **damping**—Damping operations.
- **graceful-restart**—Graceful restart events.
- **keepalive**—BGP keepalive messages.
- **nsr-synchronization**—Nonstop active routing synchronization events.
- **open**—BGP open packets. These packets are sent between peers when they are establishing a connection.
- **packets**—All BGP protocol packets.
- **refresh**—BGP refresh packets.
- **update**—BGP update packets. These packets provide routing updates to BGP systems.



Global tracing options are inherited from the configuration set by the **traceoptions** statement at the **[edit routing-options]** hierarchy level. You can override the following global trace options for the BGP protocol using the **traceoptions flag** statement included at the **[edit protocols bgp]** hierarchy level:

- **all**—All tracing operations
- **general**—All normal operations and routing table changes (a combination of the normal and route trace operations)
- **normal**—Normal events
- **policy**—Policy processing
- **route**—Routing information
- **state**—State transitions
- **task**—Routing protocol task processing
- **timer**—Routing protocol timer processing

You can optionally specify one or more of the following flag modifiers:

- **detail**—Detailed trace information.
- **filter**—Filter trace information. Applies only to **route** and **damping** tracing flags.
- **receive**—Packets being received.
- **send**—Packets being transmitted.



**NOTE:** Use the **all** trace flag and the **detail** flag modifier with caution because these might cause the CPU to become very busy.



**NOTE:** If you only enable the **update** flag, received keepalive messages do not generate a trace message.

You can filter trace statements and display only the statement information that passes through the filter by specifying the **filter** flag modifier. The **filter** modifier is only supported for the **route** and **damping** tracing flags.

The **match-on** statement specifies filter matches based on prefixes. It is used to match on route filters.



**NOTE:** Per-neighbor trace filtering is not supported on a BGP per-neighbor level for **route** and **damping** flags. Trace option filtering support is on a peer group level.



### Example: Viewing BGP Trace Files on Logical Systems

---

This example shows how to list and view files that are stored on a logical system.

- [Requirements on page 2968](#)
- [Overview on page 2968](#)
- [Configuration on page 2969](#)
- [Verification on page 2972](#)

#### Requirements

- You must have the **view** privilege for the logical system.
- Configure a network, such as the BGP network shown in “[Example: Configuring Internal BGP Peering Sessions on Logical Systems](#)” on page 2678.

#### Overview

Logical systems have their individual directory structure created in the **/var/logical-systems/logical-system-name** directory. It contains the following subdirectories:

- **/config**—Contains the active configuration specific to the logical system.
- **/log**—Contains system log and tracing files specific to the logical system.

To maintain backward compatibility for the log files with previous versions of Junos OS, a symbolic link (symlink) from the **/var/logs/logical-system-name** directory to the **/var/logical-systems/logical-system-name** directory is created when a logical system is configured.

- **/tmp**—Contains temporary files specific to the logical system.

The file system for each logical system enables logical system users to view trace logs and modify logical system files. Logical system administrators have full access to view and modify all files specific to the logical system.

Logical system users and administrators can save and load configuration files at the logical-system level using the **save** and **load** configuration mode commands. In addition, they can also issue the **show log**, **monitor**, and **file** operational mode commands at the logical-system level.

This example shows how to configure and view a BGP trace file on a logical system. The steps can be adapted to apply to trace operations for any Junos OS hierarchy level that supports trace operations.



**TIP:** To view a list of hierarchy levels that support tracing operations, enter the **help apropos traceoptions** command in configuration mode.

---



**Configuration**

- [Configuring Trace Operations on page 2969](#)
- [Viewing the Trace File on page 2969](#)
- [Deactivating and Reactivating Trace Logging on page 2971](#)
- [Results on page 2972](#)

**CLI Quick Configuration**

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set logical-systems A protocols bgp group internal-peers traceoptions file bgp-log
set logical-systems A protocols bgp group internal-peers traceoptions file size 10k
set logical-systems A protocols bgp group internal-peers traceoptions file files 2
set logical-systems A protocols bgp group internal-peers traceoptions flag update detail
```

**Configuring Trace Operations****Step-by-Step Procedure**

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure the trace operations:

1. Configure trace operations on the logical system.

```
[edit logical-systems A protocols bgp group internal-peers]
user@host# set traceoptions file bgp-log
user@host# set traceoptions file size 10k
user@host# set traceoptions file files 2
user@host# set traceoptions flag update detail
```

2. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

**Viewing the Trace File****Step-by-Step Procedure**

To view the trace file:

1. In operational mode on the main router, list the directories on the logical system.

```
user@host> file list /var/logical-systems/A
/var/logical-systems/A:
config/
log/
tmp/
```

2. In operational mode on the main router, list the log files on the logical system.

```
user@host> file list /var/logical-systems/A/log/
/var/logical-systems/A/log:
bgp-log
```

3. View the contents of the **bgp-log** file.



```

user@host> file show /var/logical-systems/A/log/bgp-log
Aug 10 17:12:01 trace_on: Tracing to "/var/log/A/bgp-log" started
Aug 10 17:14:22.826182 bgp_peer_mgmt_clear:5829: NOTIFICATION sent to
192.163.6.4 (Internal AS 17): code 6 (Cease) subcode 4 (Administratively
Reset), Reason: Management session cleared BGP neighbor
Aug 10 17:14:22.826445 bgp_send: sending 21 bytes to 192.163.6.4 (Internal
AS 17)
Aug 10 17:14:22.826499
Aug 10 17:14:22.826499 BGP SEND 192.168.6.5+64965 -> 192.163.6.4+179
Aug 10 17:14:22.826559 BGP SEND message type 3 (Notification) length 21
Aug 10 17:14:22.826598 BGP SEND Notification code 6 (Cease) subcode 4
(Administratively Reset)
Aug 10 17:14:22.831756 bgp_peer_mgmt_clear:5829: NOTIFICATION sent to
192.168.40.4 (Internal AS 17): code 6 (Cease) subcode 4 (Administratively
Reset), Reason: Management session cleared BGP neighbor
Aug 10 17:14:22.831851 bgp_send: sending 21 bytes to 192.168.40.4 (Internal
AS 17)
Aug 10 17:14:22.831901
Aug 10 17:14:22.831901 BGP SEND 192.168.6.5+53889 -> 192.168.40.4+179
Aug 10 17:14:22.831959 BGP SEND message type 3 (Notification) length 21
Aug 10 17:14:22.831999 BGP SEND Notification code 6 (Cease) subcode 4
(Administratively Reset)
...

```

4. Filter the output of the log file.

```

user@host> file show /var/logical-systems/A/log/bgp-log | match "flags 0x40"
Aug 10 17:14:54.867460 BGP SEND flags 0x40 code Origin(1): IGP
Aug 10 17:14:54.867595 BGP SEND flags 0x40 code ASPath(2) length 0: <null>
Aug 10 17:14:54.867650 BGP SEND flags 0x40 code NextHop(3): 192.168.6.5
Aug 10 17:14:54.867692 BGP SEND flags 0x40 code LocalPref(5): 100
Aug 10 17:14:54.884529 BGP RECV flags 0x40 code Origin(1): IGP
Aug 10 17:14:54.884581 BGP RECV flags 0x40 code ASPath(2) length 0: <null>
Aug 10 17:14:54.884628 BGP RECV flags 0x40 code NextHop(3): 192.163.6.4
Aug 10 17:14:54.884667 BGP RECV flags 0x40 code LocalPref(5): 100
Aug 10 17:14:54.911377 BGP RECV flags 0x40 code Origin(1): IGP
Aug 10 17:14:54.911422 BGP RECV flags 0x40 code ASPath(2) length 0: <null>
Aug 10 17:14:54.911466 BGP RECV flags 0x40 code NextHop(3): 192.168.40.4
Aug 10 17:14:54.911507 BGP RECV flags 0x40 code LocalPref(5): 100
Aug 10 17:14:54.916008 BGP SEND flags 0x40 code Origin(1): IGP
Aug 10 17:14:54.916054 BGP SEND flags 0x40 code ASPath(2) length 0: <null>
Aug 10 17:14:54.916100 BGP SEND flags 0x40 code NextHop(3): 192.168.6.5
Aug 10 17:14:54.916143 BGP SEND flags 0x40 code LocalPref(5): 100
Aug 10 17:14:54.920304 BGP RECV flags 0x40 code Origin(1): IGP
Aug 10 17:14:54.920348 BGP RECV flags 0x40 code ASPath(2) length 0: <null>
Aug 10 17:14:54.920393 BGP RECV flags 0x40 code NextHop(3): 10.0.0.10
Aug 10 17:14:54.920434 BGP RECV flags 0x40 code LocalPref(5): 100

```

5. View the tracing operations in real time.

```

user@host> clear bgp neighbor logical-system A
Cleared 2 connections

```



**CAUTION:** Clearing the BGP neighbor table is disruptive in a production environment.

6. Run the **monitor start** command with an optional **match** condition.

```

user@host> monitor start A/bgp-log | match 0.0.0.0/0

```



```

Aug 10 19:21:40.773467 BGP RECV      0.0.0.0/0
Aug 10 19:21:40.773685 bgp_rcv_nlri: 0.0.0.0/0
Aug 10 19:21:40.773778 bgp_rcv_nlri: 0.0.0.0/0 belongs to meshgroup
Aug 10 19:21:40.773832 bgp_rcv_nlri: 0.0.0.0/0 qualified bnp->ribact 0x0
12afcb 0x0

```

7. Pause the **monitor** command by pressing Esc-Q.  
To unpause the output, press Esc-Q again.
8. Halt the **monitor** command by pressing Enter and typing **monitor stop**.  
[Enter]  
user@host> **monitor stop**
9. When you are finished troubleshooting, consider deactivating trace logging to avoid any unnecessary impact to system resources.

```

[edit protocols bgp group internal-peers]
user@host:A# deactivate traceoptions
user@host:A# commit

```

When configuration is deactivated, it appears in the configuration with the **inactive** tag. To reactivate trace operations, use the **activate** configuration-mode statement.

```

[edit protocols bgp group internal-peers]
user@host:A# show

```

```

type internal;
inactive: traceoptions {
    file bgp-log size 10k files 2;
    flag update detail;
    flag all;
}
local-address 192.168.6.5;
export send-direct;
neighbor 192.163.6.4;
neighbor 192.168.40.4;

```

10. To reactivate trace operations, use the **activate** configuration-mode statement.  
[edit protocols bgp group internal-peers]  
user@host:A# **activate traceoptions**  
user@host:A# **commit**

### ***Deactivating and Reactivating Trace Logging***

#### **Step-by-Step Procedure**

To deactivate and reactivate the trace file:

1. When you are finished troubleshooting, consider deactivating trace logging to avoid an unnecessary impact to system resources.

```

[edit protocols bgp group internal-peers]
user@host:A# deactivate traceoptions
user@host:A# commit

```

When configuration is deactivated, the statement appears in the configuration with the **inactive** tag.

```

[edit protocols bgp group internal-peers]
user@host:A# show

```



```
type internal;
inactive: traceoptions {
    file bgp-log size 10k files 2;
    flag update detail;
    flag all;
}
local-address 192.168.6.5;
export send-direct;
neighbor 192.163.6.4;
neighbor 192.168.40.4;
```

2. To reactivate logging, use the **activate** configuration-mode statement.

```
[edit protocols bgp group internal-peers]
user@host:A# activate traceoptions
user@host:A# commit
```

### **Results**

From configuration mode, confirm your configuration by entering the **show logical-systems A protocols bgp group internal-peers** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show logical-systems A protocols bgp group internal-peers
traceoptions {
    file bgp-log size 10k files 2;
    flag update detail;
}
```

### **Verification**

Confirm that the configuration is working properly.

#### **Verifying That the Trace Log File Is Operating**

**Purpose** Make sure that events are being written to the log file.

**Action** user@host:A> **show log bgp-log**  
Aug 12 11:20:57 trace\_on: Tracing to "/var/log/A/bgp-log" started

**Related Documentation**

- [Understanding External BGP Peering Sessions on page 2643](#)
- [BGP Configuration Overview](#)




## Configuration Statements

### accept-remote-nexthop

<b>Syntax</b>	accept-remote-nexthop;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp group <i>group-name</i>],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.5.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Specify that a single-hop EBGp peer accepts a remote next hop with which it does not share a common subnet. Configure a separate import policy on the EBGp peer to specify the remote next hop. You cannot configure <b>multihop</b> and <b>accept-remote-nexthop</b> statements for the same EBGp peer.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Single-Hop EBGp Peers to Accept Remote Next Hops on page 2863</a></li> <li>• <a href="#">Understanding Route Advertisement on page 2803</a></li> <li>• <a href="#">multipath</a></li> </ul>



## advertise-external

<b>Syntax</b>	<code>advertise-external {conditional};</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>],</p> <p>[edit protocols bgp group <i>group-name</i>],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>neighbor-address</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.3.</p> <p>Statement introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Specify BGP to advertise the best external route into an IBGP mesh group, a route reflector cluster, or an AS confederation even if the best route is an internal route. In order to configure the <b>advertise-external</b> statement on a route reflector, you must disable intracluster reflection with the <b>no-client-reflect</b> statement. The <b>advertise-external</b> statement is supported at both the group and neighbor level. If you configure the statement at the neighbor level, you must configure it for all neighbors in a group. Otherwise, the group is automatically split into different groups.</p>
	<div>  <p><b>NOTE:</b> When configuring the <b>advertise-external</b> statement for an AS confederation, it is recommended that EBGp peers belonging to different autonomous systems are configured in a separate EBGp peer group. This ensures consistency while BGP sends the best external route to peers in the configured peer group.</p> </div>
<b>Options</b>	<p><b>conditional</b>—(Optional) Advertise the best external path only if the route selection process reaches the point at which the multiple exit discriminator (MED) metric is evaluated. The <b>conditional</b> option restricts advertisement to when the best external path and the active path are equal until the MED step of the route selection process. This implies that external routes with a longer AS path length than the active path, for instance, are not advertised. The criteria used for selecting the best external path is the same whether or not the <b>conditional</b> option is configured.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring BGP Route Advertisement on page 2803</a></li> <li>• <a href="#">Understanding Route Advertisement on page 2803</a></li> </ul>



- [advertise-inactive on page 2975](#)

## advertise-inactive

<b>Syntax</b>	advertise-inactive;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],          [edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],          [edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> neighbor <i>address</i>],          [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],          [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],          [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>],          [edit protocols bgp],          [edit protocols bgp <b>group</b> <i>group-name</i>],          [edit protocols bgp group <i>group-name</i> neighbor <i>address</i>],          [edit routing-instances <i>routing-instance-name</i> protocols bgp],          [edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],          [edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	BGP will be the best advertised route even if the routing table does not select it as an active route.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring the Preference Value for BGP Routes on page 2821</a></li> <li>• <a href="#">Example: Configuring BGP Route Preference (Administrative Distance) on page 2820</a></li> <li>• <a href="#">Understanding Route Advertisement on page 2803</a></li> <li>• <a href="#">advertise-external on page 2974</a></li> </ul>



## advertise-peer-as

---

<b>Syntax</b>	advertise-peer-as;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp], [edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>], [edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> neighbor <i>address</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>], [edit protocols bgp], [edit protocols bgp <b>group</b> <i>group-name</i>], [edit protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>], [edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Disable the default behavior of suppressing AS routes.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring BGP Route Advertisement on page 2803</a></li><li>• <a href="#">Understanding Route Advertisement on page 2803</a></li><li>• <a href="#">no-advertise-peer-as on page 3045</a></li></ul>



## algorithm (BGP BFD Authentication)

<b>Syntax</b>	<code>algorithm <i>algorithm-name</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp bfd-liveness-detection authentication],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection authentication],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection authentication],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection authentication],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection authentication],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection authentication],</p> <p>[edit protocols bgp bgp bfd-liveness-detection authentication],</p> <p>[edit protocols bgp group <i>group-name</i> bfd-liveness-detection authentication],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection authentication],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp bgp bfd-liveness-detection authentication],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection authentication],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection authentication]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.1.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for BFD authentication introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Configure the algorithm used to authenticate the specified BFD session.
<b>Options</b>	<p><b><i>algorithm-name</i></b>—Authentication algorithm name: <b>simple-password</b>, <b>keyed-md5</b>, <b>keyed-sha-1</b>, <b>meticulous-keyed-md5</b>, <b>meticulous-keyed-sha-1</b>.</p> <p><b>simple-password</b>—Plain-text password. One to 16 bytes of plain text are used to authenticate the BFD session. One or more passwords can be configured. This method is the least secure and should be used only when BFD sessions are not subject to packet interception.</p> <p><b>keyed-md5</b>—Keyed Message Digest 5 hash algorithm for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed MD5 uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than or equal to the last sequence number received. Although more secure than a simple password, this method is vulnerable to replay attacks. Increasing the rate at which the sequence number is updated can reduce this risk.</p>



**meticulous-keyed-md5**—Meticulous keyed Message Digest 5 hash algorithm. This method works in the same manner as keyed MD5, but the sequence number is updated with every packet. Although more secure than keyed MD5 and simple passwords, this method can take additional time to authenticate the session.

**keyed-sha-1**—Keyed Secure Hash Algorithm I for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed SHA uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. The key is not carried within the packets. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than the last sequence number received.

**meticulous-keyed-sha-1**—Meticulous keyed Secure Hash Algorithm I. This method works in the same manner as keyed SHA, but the sequence number is updated with every packet. Although more secure than keyed SHA and simple passwords, this method can take additional time to authenticate the session.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring BFD Authentication for Static Routes on page 2341</a></li><li>• <a href="#">Example: Configuring BGP Route Authentication on page 2924</a></li><li>• <a href="#">Example: Configuring EBGp Multihop Sessions on page 2811</a></li><li>• <a href="#">Understanding Route Authentication on page 2924</a></li><li>• <a href="#">authentication on page 2980</a></li><li>• <a href="#">bfd-liveness-detection on page 2985</a></li><li>• <a href="#">key-chain on page 3017</a></li><li>• <a href="#">loose-check on page 3028</a></li></ul>
------------------------------	--



## apply-groups

---

<b>Syntax</b>	<code>apply-groups [ <i>group-names</i> ];</code>
<b>Hierarchy Level</b>	All hierarchy levels
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	<p>Apply a configuration group to a specific hierarchy level in a configuration, to have a configuration inherit the statements in the configuration group.</p> <p>You can specify more than one group name. You must list them in order of inheritance priority. The configuration data in the first group takes priority over the data in subsequent groups.</p>
<b>Options</b>	<i>group-names</i> —One or more names specified in the <b>groups</b> statement.
<b>Required Privilege Level</b>	configure—To enter configuration mode, but other required privilege levels depend on where the statement is located in the configuration hierarchy.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Applying a Junos Configuration Group</li> <li>groups</li> </ul>

## apply-groups-except

---

<b>Syntax</b>	<code>apply-groups-except [ <i>group-names</i> ];</code>
<b>Hierarchy Level</b>	All hierarchy levels except the top level
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Disable inheritance of a configuration group.
<b>Options</b>	<i>group-names</i> —One or more names specified in the <b>groups</b> statement.
<b>Required Privilege Level</b>	configure—To enter configuration mode, but other required privilege levels depend on where the statement is located in the configuration hierarchy.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>groups</li> <li>Disabling Inheritance of a Junos OS Configuration Group</li> </ul>



## authentication (BGP BFD Liveness Detection)

---

<b>Syntax</b>	<pre>authentication {   algorithm <i>algorithm-name</i>;   key-chain <i>key-chain-name</i>;   loose-check ; }</pre>
<b>Hierarchy Level</b>	<pre>[edit logical-systems <i>logical-system-name</i> protocols bgp bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i>   bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>   bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   bgp bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   bgp group <i>group-name</i> bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection], [edit protocols bgp bgp bfd-liveness-detection], [edit protocols bgp group <i>group-name</i> bfd-liveness-detection], [edit protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection], [edit routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection], [edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i>   bfd-liveness-detection], [edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor   <i>address</i> bfd-liveness-detection]</pre>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.1.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for BFD authentication introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Specify the router and route authentication to mitigate the risk of being attacked by a machine or router that has been configured to share incorrect routing information with another router. Router and route authentication enables routers to share information only if they can verify that they are talking to a trusted source, based on a password (key). In this method, a hashed key is sent along with the route being sent to another router. The receiving router compares the sent key to its own configured key. If they are the same, the receiving router accepts the route.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring BFD for Static Routes on page 2328</a></li><li>• <a href="#">Example: Configuring BFD Authentication for Static Routes on page 2341</a></li><li>• <a href="#">Example: Configuring BGP Route Authentication on page 2924</a></li><li>• <a href="#">Understanding Route Authentication on page 2924</a></li></ul>



- [algorithm on page 2977](#)
- [bfd-liveness-detection on page 2985](#)
- [key-chain on page 3017](#)
- [loose-check on page 3028](#)



## authentication-algorithm

<b>Syntax</b>	<code>authentication-algorithm <i>algorithm</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> neighbor <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols ldp session <i>session-address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols ldp session <i>session-address</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit protocols ldp session <i>session-address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols ldp session <i>session-address</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 7.6.</p> <p>Statement introduced for BGP in Junos OS Release 8.0.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Configure an authentication algorithm type.
<b>Options</b>	<p><b><i>algorithm</i></b>—Specify one of the following types of authentication algorithms:</p> <ul style="list-style-type: none"> <li>• <b>aes-128-cmac-96</b>—Cipher-based message authentication code (AES128, 96 bits).</li> <li>• <b>hmac-sha-1-96</b>—Hash-based message authentication code (SHA1, 96 bits).</li> <li>• <b>md5</b>—Message digest 5.</li> </ul>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Understanding Route Authentication on page 2924</a></li> <li>• <a href="#">Example: Configuring Route Authentication for BGP on page 2926</a></li> </ul>



## authentication-key (Protocols BGP)

<b>Syntax</b>	authentication-key <i>key</i> ;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <i>group group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <i>group group-name neighbor address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name neighbor address</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp <i>group group-name</i>],</p> <p>[edit protocols bgp group <i>group-name neighbor address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name neighbor address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Configure an MD5 authentication key (password). Neighboring routing devices use the same password to verify the authenticity of BGP packets sent from this system.
<b>Options</b>	<i>key</i> —Authentication password. It can be up to 126 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Route Authentication for BGP on page 2926</a></li> </ul>



## authentication-key-chain (Protocols BGP)

<b>Syntax</b>	<code>authentication-key-chain <i>key-chain</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.0.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Apply and enable an authentication keychain to the routing device. Note that the referenced key chain must be defined. When configuring the authentication key update mechanism for BGP, you cannot commit the <b>0.0.0.0/allow</b> statement with authentication keys or key chains. The CLI issues a warning and fails to commit such configurations.
<b>Options</b>	<b>key-chain</b> —Authentication keychain name. It can be up to 126 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Route Authentication for BGP on page 2926</a></li> <li>• <a href="#">Example: Configuring BFD Authentication for Static Routes on page 2341</a></li> <li>• <a href="#">Configuring the Authentication Key Update Mechanism for BGP and LDP Routing Protocols</a></li> </ul>



## bfd-liveness-detection (Protocols BGP)

**Syntax**

```

bfd-liveness-detection {
    authentication {
        algorithm algorithm-name;
        key-chain key-chain-name;
        loose-check;
    }
    detection-time {
        threshold milliseconds;
    }
    hold-down-interval milliseconds;
    minimum-interval milliseconds;
    minimum-receive-interval milliseconds;
    multiplier number;
    no-adaptation;
    session-mode (automatic | multihop | single-hop);
    transmit-interval {
        minimum-interval milliseconds;
        threshold milliseconds;
    }
    version (1 | automatic);
}

```

**Hierarchy Level**

```

[edit logical-systems logical-system-name protocols bgp],
[edit logical-systems logical-system-name protocols bgp group group-name],
[edit logical-systems logical-system-name protocols bgp group group-name neighbor address],
[edit logical-systems logical-system-name routing-instances routing-instance-name protocols
bgp],
[edit logical-systems logical-system-name routing-instances routing-instance-name protocols
bgp group group-name],
[edit logical-systems logical-system-name routing-instances routing-instance-name protocols
bgp group group-name neighbor address],
[edit protocols bgp],
[edit protocols bgp group group-name],
[edit protocols bgp group group-name neighbor address],
[edit routing-instances routing-instance-name protocols bgp],
[edit routing-instances routing-instance-name protocols bgp group group-name],
[edit routing-instances routing-instance-name protocols bgp group group-name neighbor
address]

```

**Release Information**

Statement introduced in Junos OS Release 8.1.

Statement introduced in Junos OS Release 9.0 for EX Series switches.

**detection-time threshold** and **transmit-interval threshold** options introduced in Junos OS Release 8.2

Support for logical routers introduced in Junos OS Release 8.3.

Support for IBGP and multihop EBGP sessions introduced in Junos OS Release 8.3.

**holddown-interval** statement introduced in Junos OS Release 8.5. You can configure this statement only for EBGP peers at the **[edit protocols bgp group *group-name* neighbor *address*]** hierarchy level.

**no-adaptation** statement introduced in Junos OS Release 9.0.

Support for BFD authentication introduced in Junos OS Release 9.6.



Support for BFD on IPv6 interfaces with BGP introduced in Junos OS Release 11.2.  
Statement introduced in Junos OS Release 12.1 for the QFX Series.

**Description** Configure bidirectional failure detection (BFD) timers and authentication for BGP.

For IBGP and multihop EBGP support, configure the **bfd-liveness-detection** statement at the global **[edit bgp protocols]** hierarchy level. You can also configure IBGP and multihop support for a routing instance or a logical system.



**Options** **authentication algorithm** *algorithm-name* (Optional)—Configure the algorithm used to authenticate the specified BFD session: **simple-password**, **keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, **meticulous-keyed-sha-1**.

**authentication key-chain** *key-chain-name* (Optional)—Associate a security key with the specified BFD session using the name of the security keychain. The keychain name must match one of the keychains configured in the **authentication-key-chains key-chain** statement at the **[edit security]** hierarchy level.

**authentication loose-check**—(Optional) Configure loose authentication checking on the BFD session. Use only for transitional periods when authentication may not be configured at both ends of the BFD session.

**detection-time threshold** *milliseconds* (Optional)—Configure a threshold. When the BFD session detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.

**holddown-interval** *milliseconds* (Optional)—Configure an interval specifying how long a BFD session must remain up before a state change notification is sent. When you configure the hold-down interval for the BFD protocol for EBGp, the BFD session is unaware of the BGP session during this time. In this case, if the BGP session goes down during the configured hold-down interval, BFD already assumes it is down and does not send a state change notification. The **holddown-interval** statement is supported only for EBGp peers at the **[edit protocols bgp group group-name neighbor address]** hierarchy level. If the BFD session goes down and then comes back up during the configured hold-down interval, the timer is restarted. You must configure the hold-down interval on both EBGp peers. If you configure the hold-down interval for a multihop EBGp session, you must also configure a local IP address by including the **local-address** statement at the **[edit protocols bgp group group-name]** hierarchy level.

**Range:** 0 through 255,000

**Default:** 0

**minimum-interval** *milliseconds* (Required)—Configure the minimum intervals at which the local routing device transmits hello packets and then expects to receive a reply from a neighbor with which it has established a BFD session. This value represents the minimum interval at which the local routing device transmits hello packets as well as the minimum interval that the routing device expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a value in the range from 1 through 255,000 milliseconds. Optionally, instead of using this statement, you can specify the minimum transmit and receive intervals separately (using the **minimum-receive-interval** and **transmit-interval** statements).

**Range:** 1 through 255,000

**minimum-receive-interval** *milliseconds* (Optional)—Configure only the minimum interval at which the local routing device expects to receive a reply from a neighbor with which it has established a BFD session.

**Range:** 1 through 255,000



**multiplier *number*** (Optional)—Configure the number of hello packets not received by a neighbor that causes the originating interface to be declared down.

**Range:** 1 through 255

**Default:** 3

**no-adaptation** (Optional)—Configure BFD sessions not to adapt to changing network conditions. We recommend that you not disable BFD adaptation unless it is preferable to not to have BFD adaptation enabled in your network.

**transmit-interval threshold *milliseconds*** (Optional)—Configure a threshold. When the BFD session transmit interval adapts to a value greater than the threshold, a single trap and a single system message are sent. The interval threshold must be greater than the minimum transmit interval.

**Range:** 0 through 4,294,967,295 ( $2^{32} - 1$ )

**transmit-interval minimum-interval *milliseconds*** (Optional)—Configure only the minimum interval at which the local routing device transmits hello packets to a neighbor with which it has established a BFD session.

**Range:** 1 through 255,000

**version** (Optional)—Configure the BFD version to detect.

**Range:** 1 or **automatic** (autodetect the BFD version)

**Default:** **automatic**

The remaining statements are explained separately.

<b>Required Privilege</b>	routing—To view this statement in the configuration.
<b>Level</b>	routing-control—To add this statement to the configuration.

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring BFD for Static Routes on page 2328</a></li><li>• <a href="#">Example: Configuring BFD Authentication for Static Routes on page 2341</a></li><li>• <a href="#">Example: Configuring BFD on Internal BGP Peer Sessions on page 2845</a></li><li>• <a href="#">Example: Configuring BFD Authentication for BGP on page 2854</a></li><li>• <a href="#">Understanding BFD for BGP on page 2844</a></li></ul>
------------------------------	--




## bgp

---

<b>Syntax</b>	<code>bgp { ... }</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols bgp], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp], [edit protocols], [edit routing-instances <i>routing-instance-name</i> protocols]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Enable BGP on the routing device or for a routing instance.
<b>Default</b>	BGP is disabled.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>BGP Configuration Guide</li> </ul>



## bgp-orf-cisco-mode

<b>Syntax</b>	<code>bgp-orf-cisco-mode;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>outbound-route-filter</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> <b>outbound-route-filter</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> <b>outbound-route-filter</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>outbound-route-filter</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>outbound-route-filter</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> <b>outbound-route-filter</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>outbound-route-filter</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <b>outbound-route-filter</b>],</p> <p>[edit protocols bgp <b>outbound-route-filter</b>],</p> <p>[edit protocols bgp group <i>group-name</i> <b>outbound-route-filter</b>],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i> <b>outbound-route-filter</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>outbound-route-filter</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>outbound-route-filter</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> <b>outbound-route-filter</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <b>outbound-route-filter</b>],</p> <p>[edit routing-options <b>outbound-route-filter</b>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.2.</p> <p>Statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Support for the BGP group and neighbor hierarchy levels introduced in Junos OS Release 9.2.</p> <p>Support for the BGP group and neighbor hierarchy levels introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	Enable interoperability with routing devices that use the vendor-specific outbound route filter compatibility code of 130 and code type of 128.
	<div>  <p><b>NOTE:</b> To enable interoperability for all BGP peers configured on the routing device, include the statement at the [edit routing-options outbound-route-filter] hierarchy level.</p> </div>
<b>Default</b>	Disabled
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>



- Related Documentation**
- [Example: Configuring BGP Prefix-Based Outbound Route Filtering on page 2807](#)



## cluster

<b>Syntax</b>	<code>cluster <i>cluster-identifier</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> neighbor <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Specify the cluster identifier to be used by the route reflector cluster in an internal BGP group.



### CAUTION:

If you configure both route reflection and VPNs on the same routing device, the following modifications to the route reflection configuration cause current BGP sessions to be reset:

- Adding a cluster ID—If a BGP session shares the same AS number with the group where you add the cluster ID, all BGP sessions are reset regardless of whether the BGP sessions are contained in the same group.
- Creating a new route reflector—If you have an IBGP group with an AS number and create a new route reflector group with the same AS number, all BGP sessions in the IBGP group and the new route reflector group are reset.



**NOTE:** If you change the address family specified in the [edit protocols bgp family] hierarchy level, all current BGP sessions on the routing device are dropped and then reestablished.



<b>Options</b>	<i>cluster-identifier</i> —IPv6 or IPv4 address to use as the cluster identifier.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring BGP Route Reflectors on page 2900</a></li><li>• <a href="#">Understanding External BGP Peering Sessions on page 2643</a></li><li>• <a href="#">no-client-reflect on page 3047</a></li></ul>



## damping (Protocols BGP)

<b>Syntax</b>	damping;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp family <i>family</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp family <i>family</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> family <i>family</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i> family <i>family</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i> family <i>family</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp family <i>family</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp family <i>family</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i> family <i>family</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i> family <i>family</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i> family <i>family</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i> family <i>family</i>],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i> family <i>family</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp family <i>family</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i> family <i>family</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>]</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i> family <i>family</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Support for flap damping at the address family level introduced in Junos OS Release 12.2.</p>
<b>Description</b>	<p>Enable route flap damping. BGP route flapping describes the situation in which BGP systems send an excessive number of update messages to advertise network reachability information. Flap damping reduces the number of update messages sent between BGP</p>



peers, thereby reducing the load on these peers, without adversely affecting the route convergence time for stable routes.

You typically apply flap damping to external BGP (EBGP) routes (that is, to routes in different ASs). You can also apply it within a confederation, between confederation member ASs. Because routing consistency within an AS is important, do not apply flap damping to internal BGP (IBGP) routes. (If you do, it is ignored.) The exception to this rule is when flap damping is applied at the address family level. When you apply flap damping at the address family level, it works for both IBGP and EBGP.

**Default** Flap damping is disabled on the routing device.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Examples: Configuring BGP Flap Damping on page 2952](#)
- [Example: Configuring BGP Route Flap Damping Based on the MBGP MVPN Address Family on page 2956](#)



## description (Protocols BGP)

---

<b>Syntax</b>	<code>description text-description;</code>
<b>Hierarchy Level</b>	<code>[edit logical-systems logical-system-name protocols bgp],</code> <code>[edit logical-systems logical-system-name protocols bgp group group-name],</code> <code>[edit logical-systems logical-system-name protocols bgp group group-name neighbor address],</code> <code>[edit logical-systems logical-system-name routing-instances routing-instance-name protocols bgp],</code> <code>[edit logical-systems logical-system-name routing-instances routing-instance-name protocols bgp group group-name],</code> <code>[edit logical-systems logical-system-name routing-instances routing-instance-name protocols bgp group group-name neighbor address],</code> <code>[edit protocols bgp],</code> <code>[edit protocols bgp group group-name],</code> <code>[edit protocols bgp group group-name neighbor address],</code> <code>[edit routing-instances routing-instance-name protocols bgp],</code> <code>[edit routing-instances routing-instance-name protocols bgp group group-name],</code> <code>[edit routing-instances routing-instance-name protocols bgp group group-name neighbor address]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Provide a description of the global, group, or neighbor configuration. If the text includes one or more spaces, enclose it in quotation marks (" "). The text is displayed in the output of the <b>show</b> command and has no effect on the configuration.
<b>Options</b>	<i>text-description</i> —Text description of the configuration. It is limited to 255 characters.
<b>Required Privilege Level</b>	<code>routing</code> —To view this statement in the configuration. <code>routing-control</code> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>BGP Configuration Guide</li></ul>



## detection-time (BFD for BGP)

<b>Syntax</b>	<pre> detection-time {     <b>threshold</b> <i>milliseconds</i>; } </pre>
<b>Hierarchy Level</b>	<pre> [edit logical-systems <i>logical-system-name</i> protocols bgp bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i>   bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>   bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   bgp bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   bgp group <i>group-name</i> bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection], [edit protocols bgp bfd-liveness-detection], [edit protocols bgp group <i>group-name</i> bfd-liveness-detection], [edit protocols bgp group <i>group-name</i> neighbor <i>address</i> bgp bfd-liveness-detection], [edit routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection], [edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i>   bfd-liveness-detection], [edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor   <i>address</i> bfd-liveness-detection] </pre>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.2.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for BFD authentication introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Enable BFD failure detection. The BFD failure detection timers are adaptive and can be adjusted to be faster or slower. The lower the BFD failure detection timer value, the faster the failure detection and vice versa. For example, the timers can adapt to a higher value if the adjacency fails (that is, the timer detects failures more slowly). Or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. A back-off algorithm increases the receive (Rx) interval by two if the local BFD instance is the reason for the session flap. The transmission (Tx) interval is increased by two if the remote BFD instance is the reason for the session flap. You can use the <b>clear bfd adaptation</b> command to return BFD interval timers to their configured values. The <b>clear bfd adaptation</b> command is hitless, meaning that the command does not affect traffic flow on the routing device.</p> <p>The remaining statement is explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring BFD for BGP on page 2844</a></li> <li>• <a href="#">bfd-liveness-detection on page 2985</a></li> </ul>



- [threshold on page 3062](#)

---

## disable (Protocols BGP)

---

<b>Syntax</b>	disable;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols bgp], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp], [edit protocols bgp], [edit routing-instances <i>routing-instance-name</i> protocols bgp]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Disable BGP on the system.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• BGP Configuration Guide</li></ul>



## disable (BGP Graceful Restart)

<b>Syntax</b>	disable;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols bgp graceful-restart], [edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> graceful-restart], [edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i> graceful-restart], [edit protocols bgp graceful-restart], [edit protocols bgp <b>group</b> <i>group-name</i> graceful-restart], [edit protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i> graceful-restart]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Disable graceful restart for BGP. Graceful restart allows a routing device undergoing a restart to inform its adjacent neighbors and peers of its condition.



**NOTE:** If you disable graceful restart at a higher level in the configuration statement hierarchy, it is disabled at lower levels in the hierarchy also. For example, if you disable graceful restart at the [edit protocols bgp group *group-name*] hierarchy level, it is disabled for all the peers in the group. Therefore, if you want to enable graceful restart for some peers in a group and disable it for other peers in the group, enable graceful restart at the [edit protocols bgp group *group-name*] hierarchy level and disable graceful restart for each peer at the [edit protocols bgp group *group-name* neighbor *address*] hierarchy level.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Graceful Restart Options for BGP on page 1781</a></li> <li>• <a href="#">Configuring Graceful Restart for QFabric Systems on page 1777</a></li> <li>• <a href="#">graceful-restart on page 1806</a></li> </ul>



## export (Protocols BGP)

---

<b>Syntax</b>	<code>export [ <i>policy-names</i> ];</code>
<b>Hierarchy Level</b>	<code>[edit logical-systems <i>logical-system-name</i> protocols bgp],</code> <code>[edit logical-systems <i>logical-system-name</i> protocols bgp <i>group group-name</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> protocols bgp <i>group group-name</i></code> <code>  <i>neighbor address</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code> <code>  bgp],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code> <code>  bgp <i>group group-name</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code> <code>  bgp <i>group group-name</i> <i>neighbor address</i>],</code> <code>[edit protocols bgp],</code> <code>[edit protocols bgp <i>group group-name</i>],</code> <code>[edit protocols bgp <i>group group-name</i> <i>neighbor address</i>],</code> <code>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</code> <code>[edit routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name</i>],</code> <code>[edit routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name</i></code> <code>  <i>neighbor address</i>]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Apply one or more policies to routes being exported from the routing table into BGP.
<b>Options</b>	<i>policy-names</i> —Name of one or more policies.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding Route Advertisement on page 2803</a></li><li>• Routing Policy Configuration Guide</li><li>• <a href="#">import on page 3014</a></li></ul>



## family (Protocols BGP)

```
Syntax  family {
    (inet | inet6 | inet-vpn | inet6-vpn | iso-vpn) {
        (any | flow | labeled-unicast | multicast | unicast) {
            accepted-prefix-limit {
                maximum number;
                teardown <percentage-threshold> idle-timeout (forever | minutes);
            }
            add-path {
                send {
                    path-count number;
                    prefix-policy [ policy-names ];
                }
                receive;
            }
            algp [disable];
            loops number;
            prefix-limit {
                maximum number;
                teardown <percentage> <idle-timeout (forever | minutes)>;
            }
            protection;
            rib-group group-name;
            topology name {
                community {
                    target identifier;
                }
            }
        }
        flow {
            no-validate policy-name;
        }
        labeled-unicast {
            accepted-prefix-limit {
                maximum number;
                teardown <percentage> <idle-timeout (forever | minutes)>;
            }
            aggregate-label {
                community community-name;
            }
            explicit-null {
                connected-only;
            }
            prefix-limit {
                maximum number;
                teardown <percentage> <idle-timeout (forever | minutes)>;
            }
            resolve-vpn;
            rib (inet.3 | inet6.3);
            rib-group group-name;
            traffic-statistics {
                file filename <world-readable | no-world-readable>;
                interval seconds;
            }
        }
    }
}
```



```
    }
  }
  route-target {
    accepted-prefix-limit {
      maximum number;
      proxy-generate <route-target-policy route-target-policy-name>;
      teardown <percentage> <idle-timeout (forever | minutes)>;
    }
    advertise-default;
    external-paths number;
    prefix-limit {
      maximum number;
      teardown <percentage> <idle-timeout (forever | minutes)>;
    }
  }
  (inet-mdt | inet-mvpn | inet6-mvpn | l2vpn) {
    signaling {
      accepted-prefix-limit {
        maximum number;
        teardown <percentage-threshold> idle-timeout (forever | minutes);
      }
      add-path {
        send {
          path-count number;
          prefix-policy [ policy-names ];
        }
        receive;
      }
      aigp [disable];
      damping;
      loops number;
      prefix-limit {
        maximum number;
        teardown <percentage> <idle-timeout (forever | minutes)>;
      }
      rib-group group-name;
    }
  }
}
```



<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <i>group</i> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit protocols bgp <i>group</i> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <i>group</i> <i>group-name</i> <b>neighbor</b> <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p><b>inet-mvpn</b> and <b>inet6-mvpn</b> statements introduced in Junos OS Release 8.4.</p> <p><b>inet-mdt</b> statement introduced in Junos OS Release 9.4.</p> <p>Support for the <b>loops</b> statement introduced in Junos OS Release 9.6.</p>
<b>Description</b>	<p>Enable multiprotocol BGP (MP-BGP) by configuring BGP to carry network layer reachability information (NLRI) for address families other than unicast IPv4, to specify MP-BGP to carry NLRI for the IPv6 address family, or to carry NLRI for VPNs.</p>



- Options**
- any**—Configure the family type to be both unicast and multicast.
  - inet**—Configure NLRI parameters for IPv4.
  - inet6**—Configure NLRI parameters for IPv6.
  - inet-mdt**—Configure NLRI parameters for the multicast distribution tree (MDT) subaddress family identifier (SAFI) for IPv4 traffic in Layer 3 VPNs.
  - inet-mvpn**—Configure NLRI parameters for IPv4 for multicast VPNs.
  - inet6-mvpn**—Configure NLRI parameters for IPv6 for multicast VPNs.
  - inet-vpn**—Configure NLRI parameters for IPv4 for Layer 3 VPNs.
  - inet6-vpn**—Configure NLRI parameters for IPv6 for Layer 3 VPNs.
  - iso-vpn**—Configure NLRI parameters for IS-IS for Layer 3 VPNs.
  - l2vpn**—Configure NLRI parameters for IPv4 for MPLS-based Layer 2 VPNs and VPLS.
  - labeled-unicast**—Configure the family type to be labeled-unicast. This means that the BGP peers are being used only to carry the unicast routes that are being used by labeled-unicast for resolving the labeled-unicast routes. This statement is supported only with **inet** and **inet6**.
  - multicast**—Configure the family type to be multicast. This means that the BGP peers are being used only to carry the unicast routes that are being used by multicast for resolving the multicast routes.
  - unicast**—Configure the family type to be unicast. This means that the BGP peers only carry the unicast routes that are being used for unicast forwarding purposes. The default family type is **unicast**.

The remaining statements are explained separately.

- Required Privilege Level**
- routing—To view this statement in the configuration.
  - routing-control—To add this statement to the configuration.

- Related Documentation**
- [autonomous-system on page 2354](#)
  - [local-as on page 3021](#)
  - Understanding Multiprotocol BGP



## graceful-restart (Protocols BGP)

<b>Syntax</b>	<pre> graceful-restart {   disable;   restart-time seconds;   stale-routes-time seconds; } </pre>
<b>Hierarchy Level</b>	<pre> [edit logical-systems <i>logical-system-name</i> protocols bgp], [edit logical-systems <i>logical-system-name</i> protocols bgp <i>group group-name</i>], [edit logical-systems <i>logical-system-name</i> protocols bgp <i>group group-name</i> <i>neighbor address</i>], [edit protocols bgp], [edit protocols bgp <i>group group-name</i>], [edit protocols bgp <i>group group-name neighbor address</i>] </pre>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Enable graceful restart for BGP. Graceful restart allows a routing device undergoing a restart to inform its adjacent neighbors and peers of its condition. Graceful restart is disabled by default.</p> <p>To configure the duration of the BGP graceful restart period, include the <b>restart-time</b> statement at the <b>[edit protocols bgp graceful-restart]</b> hierarchy level. To set the length of time the router waits to receive messages from restarting neighbors before declaring them down, include the <b>stale-routes-time</b> statement at the <b>[edit protocols bgp graceful-restart]</b> hierarchy level.</p>



**NOTE:** If you configure graceful restart after a BGP session has been established, the BGP session restarts and the peers negotiate graceful restart capabilities.

For graceful restart to function properly, graceful restart must be enabled at the **[edit routing-instance *instance-name* routing-options]** or **[edit routing-options]** hierarchy level as well as in the protocol level.

For example:

```

protocols {
  bgp {
    group ext {
      graceful-restart;
    }
  }
}
routing-options {
  graceful-restart;
}

```



Graceful restart is enabled both at the **[edit routing-options]** hierarchy level, as well as at the routing protocol level. If graceful restart is not configured in both sections, the peer might have its route removed after a restart, which is not the intended behavior.

The remaining statements are explained separately.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration.
	routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	• <a href="#">Configuring Graceful Restart Options for BGP on page 1781</a>
	• <a href="#">Configuring Graceful Restart for QFabric Systems on page 1777</a>
	• Junos OS High Availability Configuration Guide



## group (Protocols BGP)

```
Syntax  group group-name {
    advertise-inactive;
    allow [ network/mask-length ];
    authentication-key key;
    cluster cluster-identifier;
    damping;
    description text-description;
    export [ policy-names ];
    family {
        (inet | inet6 | inet-vpn | inet6-vpn | l2-vpn) {
            (any | multicast | unicast | signaling) {
                accepted-prefix-limit {
                    maximum number;
                    teardown <percentage> <idle-timeout (forever | minutes)>;
                }
            }
            add-path {
                send {
                    path-count number;
                    prefix-policy [ policy-names ];
                }
                receive;
            }
            aigp [disable];
            damping;
            prefix-limit {
                maximum number;
                teardown <percentage> <idle-timeout (forever | minutes)>;
            }
            rib-group group-name;
            topology name {
                community {
                    target identifier;
                }
            }
        }
    }
    flow {
        no-validate policy-name;
    }
    labeled-unicast {
        accepted-prefix-limit {
            maximum number;
            teardown <percentage> <idle-timeout (forever | minutes)>;
        }
        explicit-null {
            connected-only;
        }
        prefix-limit {
            maximum number;
            teardown <percentage> <idle-timeout (forever | minutes)>;
        }
        resolve-vpn;
        rib inet.3;
    }
}
```



```

        rib-group group-name;
    }
}
route-target {
    accepted-prefix-limit {
        maximum number;
        teardown <percentage> <idle-timeout (forever | minutes)>;
    }
    advertise-default;
    external-paths number;
    prefix-limit {
        maximum number;
        teardown <percentage> <idle-timeout (forever | minutes)>;
    }
}
}
hold-time seconds;
import [ policy-names ];
ipsec-sa ipsec-sa;
keep (all | none);
local-address address;
local-as autonomous-system <private>;
local-preference local-preference;
log-updown;
metric-out metric;
multihop <ttl-value>;
multipath {
    multiple-as;
}
no-aggregator-id;
no-client-reflect;
out-delay seconds;
passive;
peer-as autonomous-system;
preference preference;
remove-private;
tcp-mss segment-size;
traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable>;
    flag flag <flag-modifier> <disable>;
}
type type;
neighbor address {
    ... peer-specific-options ...
}
}

```

**Hierarchy Level** [edit logical-systems *logical-system-name* protocols bgp],  
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols  
bgp],  
[edit protocols bgp],  
[edit routing-instances *routing-instance-name* protocols bgp]



<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	<p>Define a BGP peer group. BGP peer groups share a common type, peer autonomous system (AS) number, and cluster ID, if present. To configure multiple BGP groups, include multiple <b>group</b> statements.</p> <p>By default, the group's options are identical to the global BGP options. To override the global options, include group-specific options within the <b>group</b> statement.</p> <p>The <b>group</b> statement is one of the statements you must include in the configuration to run BGP on the routing device.</p> <p>Each group must contain at least one peer.</p>
<b>Options</b>	<p><b>group-name</b>—Name of the BGP group.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• BGP Configuration Guide</li></ul>



## hold-down-interval (BGP BFD Liveness Detection)

<b>Syntax</b>	<code>holddown-interval milliseconds;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection],</p> <p>[edit protocols bgp bfd-liveness-detection],</p> <p>[edit protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i> bgp bfd-liveness-detection],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.5.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for BFD authentication introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Configure an interval specifying how long a BFD session must remain up before a state change notification is sent.</p> <p>When you configure the hold-down interval for the BFD protocol for EBGp, the BFD session is unaware of the BGP session during this time. In this case, if the BGP session goes down during the configured hold-down interval, BFD already assumes the BGP session is down and does not send a state change notification. The <b>holddown-interval</b> statement is supported only for EBGp peers at the [edit protocols bgp group <i>group-name</i> neighbor <i>address</i>] hierarchy level. If the BFD session goes down and then comes back up during the configured hold-down interval, the timer is restarted. You must configure the hold-down interval on both EBGp peers. If you configure the hold-down interval for a multihop EBGp session, you must also configure a local IP address by including the <b>local-address</b> statement at the [edit protocols bgp group <i>group-name</i>] hierarchy level.</p>
<b>Options</b>	<p><b>milliseconds</b>—Specify the hold-down interval value.</p> <p><b>Range:</b> 0 through 255,000</p> <p><b>Default:</b> 0</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>



- Related Documentation**
- [Example: Configuring BFD for Static Routes on page 2328](#)
  - [bfd-liveness-detection on page 2985](#)



## hold-time (Protocols BGP)

---

<b>Syntax</b>	<code>hold-time seconds;</code>
<b>Hierarchy Level</b>	<code>[edit logical-systems <i>logical-system-name</i> protocols bgp],</code> <code>[edit logical-systems <i>logical-system-name</i> protocols bgp <i>group group-name</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> protocols bgp <i>group group-name</i></code> <code>  <i>neighbor address</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code> <code>  bgp],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code> <code>  bgp <i>group group-name</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code> <code>  bgp <i>group group-name neighbor address</i>],</code> <code>[edit protocols bgp],</code> <code>[edit protocols bgp <i>group group-name</i>],</code> <code>[edit protocols bgp <i>group group-name neighbor address</i>],</code> <code>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</code> <code>[edit routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name</i>],</code> <code>[edit routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name</i></code> <code>  <i>neighbor address</i>]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	<p>Specify the hold-time value to use when negotiating a connection with the peer. The hold-time value is advertised in open packets and indicates to the peer the length of time that it should consider the sender valid. If the peer does not receive a keepalive, update, or notification message within the specified hold time, the BGP connection to the peer is closed and routing devices through that peer become unavailable.</p> <p>The hold time is three times the interval at which keepalive messages are sent.</p> <p>BGP on the local routing device uses the smaller of either the local hold-time value or the peer's hold-time value received in the open message as the hold time for the BGP connection between the two peers.</p> <p>Starting in Junos OS Release 12.3, the BGP hold-time value can be zero (0). This implies that the speaker does not expect keepalive messages from its peer to maintain the BGP session. When negotiating between two peers, if one side requests a nonzero hold time and the other requests a zero hold time, the negotiation settles on the nonzero value and keepalive intervals are determined accordingly. Both sides must be set to zero for keepalive messages to stop being sent.</p>
<b>Options</b>	<b>seconds</b> —Hold time. <b>Range:</b> 10 through 65,535 seconds (or 0 for infinite hold time) <b>Default:</b> 90 seconds





**TIP:** When you set a hold-time value of 1 through 19 seconds, we recommend that you also configure the BGP `precision-timers` statement. The `precision-timers` statement ensures that if scheduler slip messages occur, the routing device continues to send keepalive messages. When the `precision-timers` statement is included, keepalive message generation is performed in a dedicated kernel thread, which helps to prevent BGP session flaps.

<b>Required Privilege</b>	routing—To view this statement in the configuration.
<b>Level</b>	routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">BGP Messages Overview on page 2641</a></li><li>• <code>precision-timers</code></li></ul>



## import (Protocols BGP)

---

<b>Syntax</b>	<code>import [ <i>policy-names</i> ];</code>
<b>Hierarchy Level</b>	<code>[edit logical-systems <i>logical-system-name</i> protocols bgp],</code> <code>[edit logical-systems <i>logical-system-name</i> protocols bgp <i>group group-name</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> protocols bgp <i>group group-name</i></code> <code>  <i>neighbor address</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code> <code>  bgp],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code> <code>  bgp <i>group group-name</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code> <code>  bgp <i>group group-name neighbor address</i>],</code> <code>[edit protocols bgp],</code> <code>[edit protocols bgp <i>group group-name</i>],</code> <code>[edit protocols bgp <i>group group-name neighbor address</i>],</code> <code>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</code> <code>[edit routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name</i>],</code> <code>[edit routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name</i></code> <code>  <i>neighbor address</i>]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Apply one or more routing policies to routes being imported into the Junos OS routing table from BGP.
<b>Options</b>	<i>policy-names</i> —Name of one or more policies.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring BGP Interactions with IGP's on page 2799</a></li><li>• <a href="#">Understanding Route Advertisement on page 2803</a></li><li>• Importing and Exporting Routes</li><li>• Routing Policy Configuration Guide</li><li>• <a href="#">export on page 3000</a></li></ul>



## include-mp-next-hop

<b>Syntax</b>	include-mp-next-hop;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Enable multiprotocol updates to contain next-hop reachability information.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Examples: Configuring Multiprotocol BGP</li> </ul>



## keep

---

<b>Syntax</b>	keep (all   none);
<b>Hierarchy Level</b>	<pre>[edit logical-systems <i>logical-system-name</i> protocols bgp], [edit logical-systems <i>logical-system-name</i> protocols bgp <i>group group-name</i>], [edit logical-systems <i>logical-system-name</i> protocols bgp <i>group group-name</i> <i>neighbor address</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name neighbor address</i>], [edit protocols bgp], [edit protocols bgp <i>group group-name</i>], [edit protocols bgp <i>group group-name neighbor address</i>], [edit routing-instances <i>routing-instance-name</i> protocols bgp], [edit routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name</i> <i>neighbor address</i>]</pre>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Specify whether routes learned from a BGP peer are retained in the routing table even if they contain an AS number that was exported from the local AS.
<b>Default</b>	If you do not include this statement, most routes are retained in the routing table.
<b>Options</b>	<b>all</b> —Retain all routes.  <b>none</b> —Retain none of the routes. When <b>keep none</b> is configured for the BGP session and the inbound policy changes, Junos OS forces readvertisement of the full set of routes advertised by the peer.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding Route Advertisement on page 2803</a></li><li>• <a href="#">out-delay on page 3048</a></li></ul>



## key-chain (BGP BFD Authentication)

<b>Syntax</b>	<code>key-chain <i>key-chain-name</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp bfd-liveness-detection authentication],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection authentication],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection authentication],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection authentication],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection authentication],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection authentication],</p> <p>[edit protocols bgp bgp bfd-liveness-detection authentication],</p> <p>[edit protocols bgp group <i>group-name</i> bgp bfd-liveness-detection authentication],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection authentication],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection authentication],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection authentication],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection authentication]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.1.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for BFD authentication introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Associate a security key with the specified BFD session using the name of the security keychain. Each key has a unique start time within the keychain. Keychain authentication allows you to change the password information periodically without bringing down peering sessions. This keychain authentication method is referred to as <i>hitless</i> because the keys roll over from one to the next without resetting any peering sessions or interrupting the routing protocol.
<b>Options</b>	<b><i>key-chain-name</i></b> —Name of the authentication keychain. The keychain name must match one of the keychains configured with the <b>key-chain <i>key-chain-name</i></b> statement at the [edit security authentication-key-chain] hierarchy level.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring BFD for Static Routes on page 2328</a></li> <li>• <a href="#">Example: Configuring BFD Authentication for Static Routes on page 2341</a></li> <li>• <a href="#">Example: Configuring BFD on Internal BGP Peer Sessions on page 2845</a></li> <li>• <a href="#">Example: Configuring BGP Route Authentication on page 2924</a></li> </ul>



- [Example: Configuring EBGp Multihop Sessions on page 2811](#)
- [Understanding Route Authentication on page 2924](#)



## local-address (Protocols BGP)

<b>Syntax</b>	<code>local-address address;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],  [edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],  [edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],  [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],  [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],  [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>],  [edit protocols bgp],  [edit protocols bgp <b>group</b> <i>group-name</i>],  [edit protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>],  [edit routing-instances <i>routing-instance-name</i> protocols bgp],  [edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],  [edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Specify the address of the local end of a BGP session. This address is used to accept incoming connections to the peer and to establish connections to the remote peer. When none of the operational interfaces are configured with the specified local address, a session with a BGP peer is placed in the idle state.</p> <p>You generally configure a local address to explicitly configure the system's IP address from BGP's point of view. This IP address can be either an IPv6 or IPv4 address. Typically, an IP address is assigned to a loopback interface, and that IP address is configured here.</p> <p>For internal BGP (IBGP) peering sessions, generally the loopback interface (lo0) is used to establish connections between the IBGP peers. The loopback interface is always up as long as the device is operating. If there is a route to the loopback address, the IBGP peering session stays up. If a physical interface address is used instead and that interface goes up and down, the IBGP peering session also goes up and down. Thus, the loopback interface provides fault tolerance in case the physical interface or the link goes down, if the device has link redundancy.</p> <p>When a device peers with a remote device's loopback interface address, the local device expects BGP update messages to come from (be sourced by) the remote device's loopback interface address. The <b>local-address</b> statement enables you to specify the source information in BGP update messages. If you omit the <b>local-address</b> statement, the expected source of BGP update messages is based on the device's source address selection rules, which normally result in the egress interface address being the expected source of update messages. When this happens, the peering session is not established because a mismatch exists between the expected source address (the egress interface</p>



of the peer) and the actual source (the loopback interface of the peer). To ensure that the expected source address matches the actual source address, specify the loopback interface address in the **local-address** statement.



**NOTE:** Although a BGP session can be established when only one of the paired routers has **local-address** configured, we strongly recommend that you configure **local-address** on both paired routers for IBGP and multihop EBGP sessions. The **local-address** statement ensures that deterministic fixed addresses are used for the BGP session end-points.

If you include the **default-address-selection** statement in the configuration, the software chooses the system default address as the source for most locally generated IP packets. For protocols in which the local address is unconstrained by the protocol specification, for example IBGP and multihop EBGP, if you do not configure a specific local address when configuring the protocol, the local address is chosen using the same methods as other locally generated IP packets.

**Default** If you do not configure a local address, BGP uses the routing device's source address selection rules to set the local address.

**Options** **address**—IPv6 or IPv4 address of the local end of the connection.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring Internal BGP Peering Sessions on Logical Systems on page 2678](#)
- [Example: Configuring Internal BGP Peer Sessions on page 2667](#)
- [Understanding Internal BGP Peering Sessions on page 2666](#)
- [router-id on page 2431](#)



## local-as

<b>Syntax</b>	local-as <i>autonomous-system</i> <loops number> <private   alias> <no-prepend-global-as>;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp group <i>group-name</i>],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p><b>alias</b> option introduced in Junos OS Release 9.5.</p> <p><b>no-prepend-global-as</b> option introduced in Junos OS Release 9.6.</p>
<b>Description</b>	<p>Specify the local autonomous system (AS) number. An AS is a set of routing devices that are under a single technical administration and generally use a single interior gateway protocol (IGP) and metrics to propagate routing information within the set of routing devices.</p> <p>Internet service providers (ISPs) sometimes acquire networks that belong to a different AS. When this occur, there is no seamless method for moving the BGP peers of the acquired network to the AS of the acquiring ISP. The process of configuring the BGP peers with the new AS number can be time-consuming and cumbersome. In this case, it might not be desirable to modify peer arrangements or configuration. During this kind of transition period, it can be useful to configure BGP-enabled devices in the new AS to use the former AS number in BGP updates. This former AS number is called a <i>local</i> AS.</p>



**NOTE:** If you are using BGP on the routing device, you must configure an AS number before you specify the local as number.

In Junos OS Release 9.1 and later, the AS numeric range in plain-number format is extended to provide BGP support for 4-byte AS numbers, as defined in RFC 4893, *BGP Support for Four-octet AS Number Space*.

In Junos OS Release 9.3 and later, you can also configure a 4-byte AS number using the AS-dot notation format of two integer values joined by a period: <16-bit high-order value in decimal>.<16-bit low-order value in decimal>. For



example, the 4-byte AS number of 65546 in plain-number format is represented as 1.10 in the AS-dot notation format.

**Options** **alias**—(Optional) Configure the local AS as an alias of the global AS number configured for the router at the **[edit routing-options]** hierarchy level. As a result, a BGP peer considers any local AS to which it is assigned as equivalent to the primary AS number configured for the routing device. When you use the **alias** option, only the AS (global or local) used to establish the BGP session is prepended in the AS path sent to the BGP neighbor.

**autonomous-system**—AS number.

**Range:** 1 through 4,294,967,295 ( $2^{32} - 1$ ) in plain-number format

**Range:** 0.0 through 65535.65535 in AS-dot notation format

**loops number**—(Optional) Specify the number of times detection of the AS number in the AS\_PATH attribute causes the route to be discarded or hidden. For example, if you configure **loops 1**, the route is hidden if the AS number is detected in the path one or more times. This is the default behavior. If you configure **loops 2**, the route is hidden if the AS number is detected in the path two or more times.



**NOTE:** If you configure the local AS values for any BGP group, the detection of routing loops is performed using both the AS and the local AS values for all BGP groups.

If the local AS for the EBGp or IBGP peer is the same as the current AS, do not use the **local-as** statement to specify the local AS number.

When you configure the local AS within a VRF, this impacts the AS path loop-detection mechanism. All of the **local-as** statements configured on the device are part of a single AS domain. The AS path loop-detection mechanism is based on looking for a matching AS present in the domain.

**Range:** 1 through 10

**Default:** 1

**no-prepend-global-as**—(Optional) Specify to strip the global AS and to prepend only the local AS in AS paths sent to external peers.

**private**—(Optional) Configure to use the local AS only during the establishment of the BGP session with a BGP neighbor but to hide it in the AS path sent to external BGP peers. Only the global AS is included in the AS path sent to external peers.



**NOTE:** The **private** and **alias** options are mutually exclusive. You cannot configure both options with the same **local-as** statement.



<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Examples: Configuring BGP Local AS on page 2740</a></li><li>• <a href="#">Example: Configuring a Local AS for EBGp Sessions on page 2745</a></li><li>• <a href="#">autonomous-system on page 2354</a></li><li>• <a href="#">family on page 3001</a></li></ul>



## local-preference

<b>Syntax</b>	<code>local-preference local-preference;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],          [edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],          [edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],          [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],          [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],          [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],          [edit protocols bgp],          [edit protocols bgp <b>group</b> <i>group-name</i>],          [edit protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],          [edit routing-instances <i>routing-instance-name</i> protocols bgp],          [edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],          [edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Modify the value of the <b>LOCAL_PREF</b> path attribute, which is a metric used by IBGP sessions to indicate the degree of preference for an external route. The route with the highest local preference value is preferred.</p> <p>The <b>LOCAL_PREF</b> path attribute always is advertised to internal BGP peers and to neighboring confederations. It is never advertised to external BGP peers.</p>
<b>Default</b>	If you omit this statement, the <b>LOCAL_PREF</b> path attribute, if present, is not modified.
<b>Options</b>	<p><b>local-preference</b>—Preference to assign to routes learned from BGP or from the group or peer.</p> <p><b>Range:</b> 0 through 4,294,967,295 (<math>2^{32} - 1</math>)</p> <p><b>Default:</b> If the <b>LOCAL_PREF</b> path attribute is present, do not modify its value. If a BGP route is received without a <b>LOCAL_PREF</b> attribute, the route is handled locally (it is stored in the routing table and advertised by BGP) as if it were received with a <b>LOCAL_PREF</b> value of 100. By default, non-BGP routes that are advertised by BGP are advertised with a <b>LOCAL_PREF</b> value of 100.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring the Local Preference Value for BGP Routes on page 2689</a></li> <li>• <a href="#">Understanding Internal BGP Peering Sessions on page 2666</a></li> </ul>



- [preference on page 3055](#)

## log-updown (Protocols BGP)

<b>Syntax</b>	log-updown;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <i>group</i> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit protocols bgp <i>group</i> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <i>group</i> <i>group-name</i> <b>neighbor</b> <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Specify to generate a log a message whenever a BGP peer makes a state transition. Messages are logged using the system logging mechanism located at the <b>[edit system syslog]</b> hierarchy level.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Preventing BGP Session Resets on page 2945</a></li> <li>• Junos OS System Basics Configuration Guide</li> <li>• <a href="#">traceoptions on page 3065</a></li> </ul>



## loops

<b>Syntax</b>	<code>loops <i>number</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp family <i>address-family</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> family <i>address-family</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> local-as],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> family <i>address-family</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> local-as]</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp local-as],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options autonomous-system <i>as-number</i>],</p> <p>[edit protocols bgp family <i>address-family</i>],</p> <p>[edit protocols bgp group <i>group-name</i> family <i>address-family</i>],</p> <p>[edit protocols bgp group <i>group-name</i> local-as],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i> family <i>address-family</i>],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i> local-as]</p> <p>[edit protocols bgp local-as],</p> <p>[edit routing-options autonomous-system <i>as-number</i>]</p>
<b>Release Information</b>	Statement introduced in Junos OS Release 9.6.
<b>Description</b>	<p>Globally, for the local-AS BGP attribute, or the specified address family, allow the local device's AS number to be in the received AS paths, and specify the number of times detection of the local device's AS number in the AS_PATH attribute causes the route to be discarded or hidden. For example, if you configure <b>loops 1</b>, the route is hidden if the local device's AS number is detected in the path one or more times. This prevents routing loops and is the default behavior. If you configure <b>loops 2</b>, the route is hidden if the local device's AS number is detected in the path two or more times.</p> <p>Some examples of BGP address families are as follows:</p> <ul style="list-style-type: none"> <li>• <b>inet unicast</b></li> <li>• <b>inet-vpn multicast</b></li> <li>• <b>inet6 any</b></li> <li>• <b>l2vpn auto-discovery-only</b></li> <li>• ...</li> </ul> <p>This list is truncated for brevity. For a complete list of protocol families for which you can specify the <b>loops</b> statement, enter the <b>help apropos loops</b> configuration command at the <b>[edit protocols bgp]</b> hierarchy level on your device.</p> <pre>[edit protocols bgp] user@host# help apropos loops set family inet unicast loops     Allow local AS in received AS paths set family inet unicast loops &lt;loops&gt;     AS-Path loop count set family inet multicast loops</pre>



```

    Allow local AS in received AS paths
set family inet multicast loops <loops>
    AS-Path loop count
set family inet flow loops
    Allow local AS in received AS paths
set family inet flow loops <loops>
    AS-Path loop count
set family inet any loops
    Allow local AS in received AS paths
set family inet any loops <loops>
    AS-Path loop count
set family inet labeled-unicast loops
    Allow local AS in received AS paths
...

```



**NOTE:** When you configure the `loops` statement for a specific BGP address family, that value is used to evaluate the AS path for routes received by a BGP peer for the specified address family, rather than the `loops` value configured for the global AS number with the `loops` statement at the `[edit routing-options autonomous-system as-number]` hierarchy level.

**Options** *number*—Number of times detection of the AS number in the AS\_PATH attribute causes the route to be discarded or hidden.  
**Range:** 1 through 10  
**Default:** 1

**Required Privilege Level** routing—To view this statement in the configuration.  
 routing-control—To add this statement to the configuration.

**Related Documentation**

- [autonomous-system on page 2354](#)
- [family on page 3001](#)
- [local-as on page 3021](#)



## loose-check (BGP BFD Authentication)

<b>Syntax</b>	<code>loose-check ;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp bfd-liveness-detection authentication],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection authentication],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection authentication],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection authentication],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection authentication],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection authentication],</p> <p>[edit protocols bgp bgp bfd-liveness-detection authentication],</p> <p>[edit protocols bgp group <i>group-name</i> bfd-liveness-detection authentication],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection authentication],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection authentication],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection authentication],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection authentication]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.1.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for BFD authentication introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Specify loose authentication checking on the BFD session. Use loose authentication for transitional periods only when authentication might not be configured at both ends of the BFD session.</p> <p>By default, strict authentication is enabled and authentication is checked at both ends of each BFD session. Optionally, to smooth migration from nonauthenticated sessions to authenticated sessions, you can configure <i>loose checking</i>. When loose checking is configured, packets are accepted without authentication being checked at each end of the session.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring BFD for Static Routes on page 2328</a></li> <li>• <a href="#">Example: Configuring BFD Authentication for Static Routes on page 2341</a></li> <li>• <a href="#">Example: Configuring BFD on Internal BGP Peer Sessions on page 2845</a></li> <li>• <a href="#">Example: Configuring BGP Route Authentication on page 2924</a></li> <li>• <a href="#">Example: Configuring EBGp Multihop Sessions on page 2811</a></li> </ul>



- [Understanding Route Authentication on page 2924](#)



## metric-out (Protocols BGP)

<b>Syntax</b>	<code>metric-out (<i>metric</i>   minimum-igp <i>offset</i>   igp (delay-med-update   <i>offset</i>);</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <i>group group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <i>group group-name neighbor address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name neighbor address</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp <i>group group-name</i>],</p> <p>[edit protocols bgp <i>group group-name neighbor address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name neighbor address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Option <b>delay-med-update</b> introduced in Junos OS Release 9.0.</p>
<b>Description</b>	<p>Specify the metric for all routes sent using the multiple exit discriminator (MED, or <b>MULTI_EXIT_DISC</b>) path attribute in update messages. This path attribute is used to discriminate among multiple exit points to a neighboring AS. If all other factors are equal, the exit point with the lowest metric is preferred.</p> <p>You can specify a constant metric value by including the <i>metric</i> option. For configurations in which a BGP peer sends third-party next hops that require the local system to perform next-hop resolution—IBGP configurations, configurations within confederation peers, or EBGP configurations that include the <b>multihop</b> command—you can specify a variable metric by including the <b>minimum-igp</b> or <b>igp</b> option.</p> <p>You can increase or decrease the variable metric calculated from the IGP metric (either from the <b>igp</b> or <b>minimum-igp</b> statement) by specifying a value for <i>offset</i>. The metric is increased by specifying a positive value for <i>offset</i>, and decreased by specifying a negative value for <i>offset</i>.</p> <p>In Junos OS Release 9.0 and later, you can specify that a BGP group or peer not advertise updates for the MED path attributes used to calculate IGP costs for BGP next hops unless the MED is lower. You can also configure an interval to delay when MED updates are sent by including the <b>med-igp-update-interval minutes</b> statement at the [edit routing-options] hierarchy level.</p>
<b>Options</b>	<p><b>delay-med-update</b>—Specify that a BGP group or peer configured with the <b>metric-out igp</b> statement not advertise MED updates unless the current MED value is lower than</p>



the previously advertised MED value, or another attribute associated with the route has changed, or the BGP peer is responding to a refresh route request.



**NOTE:** You cannot configure the `delay-med-update` statement at the global BGP level.

**igp**—Set the metric to the most recent metric value calculated in the IGP to get to the BGP next hop. Routes learned from an EBGP peer usually have a next hop on a directly connected interface and thus the IGP value is equal to zero. This is the value advertised.

**metric**—Primary metric on all routes sent to peers.

**Range:** 0 through 4,294,967,295 ( $2^{32} - 1$ )

**Default:** No metric is sent.

**minimum-igp**—Set the metric to the minimum metric value calculated in the IGP to get to the BGP next hop. If a newly calculated metric is greater than the minimum metric value, the metric value remains unchanged. If a newly calculated metric is lower, the metric value is lowered to that value. When you change a neighbor's export policy from any configuration to a configuration that sets the minimum IGP offset on an exported route, the advertised MED is not updated if the value would increase as a result, even if the previous configuration does not use a minimum IGP-based MED value. This behavior helps to prevent unnecessary route flapping when an IGP cost changes, by not forcing a route update if the metric value increases past the previous lowest known value.

**offset**—Increases or decreases the metric by this value.

**Range:**  $-2^{31}$  through  $2^{31} - 1$

**Default:** None

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Associating the MED Path Attribute with the IGP Metric and Delaying MED Updates on page 2730</a></li> <li>• <a href="#">Examples: Configuring BGP MED on page 2702</a></li> <li>• <a href="#">Example: Configuring the MED Attribute Directly on page 2704</a></li> <li>• <a href="#">Understanding the MED Attribute on page 2702</a></li> <li>• <a href="#">med-igp-update-interval on page 2397</a></li> </ul>
------------------------------	---




## minimum-interval (BGP BFD Liveness Detection)

<b>Syntax</b>	<code>minimum-interval <i>milliseconds</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection],</p> <p>[edit protocols bgp bfd-liveness-detection],</p> <p>[edit protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i> bgp bfd-liveness-detection],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.5.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Configure the minimum interval after which the local routing device transmits hello packets and then expects to receive a reply from a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can specify the minimum transmit and receive intervals separately using the <b>transmit-interval</b> <b>minimum-interval</b> and <b>minimum-receive-interval</b> statements.
<b>Options</b>	<p><b><i>milliseconds</i></b>—Specify the minimum interval value for BGP BFD liveliness detection.</p> <p><b>Range:</b> 1 through 255,000</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring BFD for Static Routes on page 2328</a></li> <li>• <a href="#">bfd-liveness-detection on page 2985</a></li> <li>• <a href="#">minimum-receive-interval on page 3035</a></li> <li>• <a href="#">transmit-interval on page 3068</a></li> </ul>



## minimum-interval (BGP BFD Transmit Interval)

<b>Syntax</b>	<code>minimum-interval <i>milliseconds</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp bfd-liveness-detection transmit-interval],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection transmit-interval],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection transmit-interval],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection transmit-interval],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection transmit-interval],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection transmit-interval],</p> <p>[edit protocols bgp bfd-liveness-detection transmit-interval],</p> <p>[edit protocols bgp group <i>group-name</i> bfd-liveness-detection transmit-interval],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i> bgp bfd-liveness-detection transmit-interval],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection transmit-interval],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection transmit-interval],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection transmit-interval]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.2.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for BFD authentication introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Configure the minimum interval at which the local routing device transmits hello packets to a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum transmit interval using the <b>minimum-interval</b> statement.
<b>Options</b>	<p><i>milliseconds</i>—Minimum transmit interval value.</p> <p><b>Range:</b> 1 through 255,000</p>
	<div>  <p><b>NOTE:</b> The threshold value specified in the <b>threshold</b> statement must be greater than the value specified in the <b>minimum-interval</b> statement for the <b>transmit-interval</b> statement.</p> </div>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>



**Related  
Documentation**

- [Example: Configuring BFD for Static Routes on page 2328](#)
- [bfd-liveness-detection on page 2985](#)
- [minimum-interval on page 3032](#)
- [threshold on page 3064](#)



## minimum-receive-interval (BGP BFD Liveness Detection)

<b>Syntax</b>	<code>minimum-receive-interval <i>milliseconds</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection],</p> <p>[edit protocols bgp bfd-liveness-detection],</p> <p>[edit protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i> bgp bfd-liveness-detection],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.5.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for BFD authentication introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Configure the minimum interval after which the local routing device must receive a reply from a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum receive interval using the <b>minimum-interval</b> statement.
<b>Options</b>	<p><i>milliseconds</i>—Specify the minimum receive interval value.</p> <p><b>Range:</b> 1 through 255,000</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring BFD for Static Routes on page 2328</a></li> <li>• <a href="#">bfd-liveness-detection on page 2985</a></li> <li>• <a href="#">minimum-interval on page 3032</a></li> <li>• <a href="#">transmit-interval on page 3068</a></li> </ul>



## mtu-discovery

<b>Syntax</b>	mtu-discovery;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Configure TCP path maximum transmission unit (MTU) discovery.</p> <p>TCP path MTU discovery enables BGP to automatically discover the best TCP path MTU for each BGP session. In Junos OS, TCP path MTU discovery is disabled by default for all BGP neighbor sessions.</p> <p>When MTU discovery is disabled, TCP sessions that are not directly connected transmit packets of 512-byte maximum segment size (MSS). These small packets minimize the chances of packet fragmentation at a device along the path to the destination. However, because most links use an MTU of at least 1500 bytes, 512-byte packets do not result in the most efficient use of link bandwidth. For directly connected EBGP sessions, MTU mismatches prevent the BGP session from being established. As a workaround, enable path MTU discovery within the EBGP group.</p> <p>Path MTU discovery dynamically determines the MTU size on the network path between the source and the destination, with the goal of avoiding IP fragmentation. Path MTU discovery works by setting the Don't Fragment (DF) bit in the IP headers of outgoing packets. When a device along the path has an MTU that is smaller than the packet, the device drops the packet. The device also sends back an ICMP Fragmentation Needed (Type 3, Code 4) message that contains the device's MTU, thus allowing the source to reduce its path MTU appropriately. The process repeats until the MTU is small enough to traverse the entire path without fragmentation.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>



- Related Documentation**
- [Example: Limiting TCP Segment Size for BGP on page 2940](#)
  - Configuring the Junos OS for IPv6 Path MTU Discovery
  - Configuring the Junos OS for Path MTU Discovery on Outgoing GRE Tunnel Connections



## multihop

**Syntax**    multihop {  
                no-nexthop-change;  
                ttl *ttl-value*;  
            }

**Hierarchy Level**    [edit logical-systems *logical-system-name* protocols bgp],  
                          [edit logical-systems *logical-system-name* protocols bgp *group* *group-name*],  
                          [edit logical-systems *logical-system-name* protocols bgp *group* *group-name*  
                          *neighbor* *address*],  
                          [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols  
                          bgp],  
                          [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols  
                          bgp *group* *group-name*],  
                          [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols  
                          bgp *group* *group-name* *neighbor* *address*],  
                          [edit protocols bgp],  
                          [edit protocols bgp *group* *group-name*],  
                          [edit protocols bgp *group* *group-name* *neighbor* *address*],  
                          [edit routing-instances *routing-instance-name* protocols bgp],  
                          [edit routing-instances *routing-instance-name* protocols bgp *group* *group-name*],  
                          [edit routing-instances *routing-instance-name* protocols bgp *group* *group-name*  
                          *neighbor* *address*]

**Release Information**    Statement introduced before Junos OS Release 7.4.  
                              Statement introduced in Junos OS Release 9.0 for EX Series switches.  
                              Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description**    Configure an EBGp multihop session.

For Layer 3 VPNs, you configure the EBGp multihop session between the PE and CE routers. This allows you to configure one or more routers between the PE and CE routers.

An external confederation peer is a special case that allows unconnected third-party next hops. You do not need to configure multihop sessions explicitly in this particular case because multihop behavior is implied.

If you have external BGP confederation peer-to-loopback addresses, you still need the multihop configuration.



**NOTE:** You cannot configure the `accept-remote-nexthop` statement at the same time.

**Default**    If you omit this statement, all EBGp peers are assumed to be directly connected (that is, you are establishing a nonmultihop, or “regular,” BGP session), and the default time-to-live (TTL) value is 1.

The remaining statements are explained separately.



<b>Required Privilege</b>	routing—To view this statement in the configuration.
<b>Level</b>	routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring EBGp Multihop Sessions on page 2811</a></li><li>• <a href="#">Configuring EBGp Multihop Sessions Between PE and CE Routers in Layer 3 VPNs</a></li><li>• <a href="#">accept-remote-nextthop on page 2973</a></li><li>• no-nextthop-change</li><li>• ttl</li></ul>



## multiplier (BGP BFD Liveness Detection)

---

<b>Syntax</b>	<code>multiplier <i>number</i>;</code>
<b>Hierarchy Level</b>	<code>[edit logical-systems <i>logical-system-name</i> protocols bgp bfd-liveness-detection],</code> <code>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i></code> <code>  bfd-liveness-detection],</code> <code>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i></code> <code>  bfd-liveness-detection],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code> <code>  bgp bfd-liveness-detection],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code> <code>  bgp group <i>group-name</i> bfd-liveness-detection],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code> <code>  bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection],</code> <code>[edit protocols bgp bfd-liveness-detection],</code> <code>[edit protocols bgp group <i>group-name</i> bfd-liveness-detection],</code> <code>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i> bgp bfd-liveness-detection],</code> <code>[edit routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection],</code> <code>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i></code> <code>  bfd-liveness-detection],</code> <code>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor</code> <code>  <i>address</i> bfd-liveness-detection]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 8.5. Statement introduced in Junos OS Release 9.0 for EX Series switches. Support for BFD authentication introduced in Junos OS Release 9.6. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure the number of hello packets not received by a neighbor that causes the originating interface to be declared down.
<b>Options</b>	<i>number</i> —Number of hello packets. <b>Range:</b> 1 through 255 <b>Default:</b> 3
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring BFD for Static Routes on page 2328</a></li><li>• <a href="#">bfd-liveness-detection on page 2985</a></li></ul>



## neighbor (Protocols BGP)

```
Syntax neighbor address {
    accept-remote-nexthop;
    advertise-external <conditional>;
    advertise-inactive;
    (advertise-peer-as | no-advertise-peer-as);
    as-override;
    authentication-algorithm algorithm;
    authentication-key key;
    authentication-key-chain key-chain;
    cluster cluster-identifier;
    damping;
    description text-description;
    export [ policy-names ];
    family {
        (inet | inet6 | inet-mvpn | inet6-mpvn | inet-vpn | inet6-vpn | iso-vpn | l2-vpn) {
            (any | flow | multicast | unicast | signaling) {
                accepted-prefix-limit {
                    maximum number;
                    teardown <percentage> <idle-timeout (forever | minutes)>;
                }
                damping;
                prefix-limit {
                    maximum number;
                    teardown <percentage> <idle-timeout (forever | minutes)>;
                }
                rib-group group-name;
                topology name {
                    community {
                        target identifier;
                    }
                }
            }
        }
        flow {
            no-validate policy-name;
        }
        labeled-unicast {
            accepted-prefix-limit {
                maximum number;
                teardown <percentage> <idle-timeout (forever | minutes)>;
            }
            aggregate-label {
                community community-name;
            }
            explicit-null {
                connected-only;
            }
            prefix-limit {
                maximum number;
                teardown <percentage> <idle-timeout (forever | minutes)>;
            }
            resolve-vpn;
            rib inet.3;
        }
    }
}
```



```

        rib-group group-name;
        topology name {
            community {
                target identifier;
            }
        }
    }
}
route-target {
    advertise-default;
    external-paths number;
    accepted-prefix-limit {
        maximum number;
        teardown <percentage> <idle-timeout (forever | minutes)>;
    }
    prefix-limit {
        maximum number;
        teardown <percentage> <idle-timeout (forever | minutes)>;
    }
}
signaling {
    prefix-limit {
        maximum number;
        teardown <percentage> <idle-timeout (forever | minutes)>;
    }
}
}
graceful-restart {
    disable;
    restart-time seconds;
    stale-routes-time seconds;
}
hold-time seconds;
import [ policy-names ];
ipsec-sa ipsec-sa;
keep (all | none);
local-address address;
local-as autonomous-system <private>;
local-interface interface-name;
local-preference preference;
log-updown;
metric-out (metric | minimum-igp <offset> | igp <offset>);
mtu-discovery;
multihop <ttl-value>;
multipath {
    multiple-as;
}
no-aggregator-id;
no-client-reflect;
out-delay seconds;
passive;
peer-as autonomous-system;
preference preference;
tcp-mss segment-size;
traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable>;

```



```

        flag flag <flag-modifier> <disable>;
    }
    vpn-apply-export;
}

```

Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
Description	<p>Explicitly configure a neighbor (peer). To configure multiple BGP peers, include multiple <b>neighbor</b> statements.</p> <p>By default, the peer's options are identical to those of the group. You can override these options by including peer-specific option statements within the <b>neighbor</b> statement.</p> <p>The <b>neighbor</b> statement is one of the statements you can include in the configuration to define a minimal BGP configuration on the routing device. (You can include an <b>allow all</b> statement in place of a <b>neighbor</b> statement.)</p>
Options	<p><b>address</b>—IPv6 or IPv4 address of a single peer.</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>BGP Configuration Guide</li> </ul>



## no-adaptation (BGP BFD Liveness Detection)

---

<b>Syntax</b>	no-adaptation;
<b>Hierarchy Level</b>	<pre>[edit logical-systems <i>logical-system-name</i> protocols bgp bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i>   bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>   bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   bgp bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   bgp group <i>group-name</i> bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection], [edit protocols bgp bfd-liveness-detection], [edit protocols bgp group <i>group-name</i> bfd-liveness-detection], [edit protocols bgp group <i>group-name</i> neighbor <i>address</i> bgp bfd-liveness-detection], [edit routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection], [edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i>   bfd-liveness-detection], [edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor   <i>address</i> bfd-liveness-detection]</pre>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.0</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for BFD authentication introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Configure BFD sessions not to adapt to changing network conditions. We recommend that you <i>do not</i> disable BFD adaptation unless it is preferable to have BFD adaptation disabled in your network.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring BFD for Static Routes on page 2328</a></li><li>• <a href="#">bfd-liveness-detection on page 2985</a></li></ul>



## no advertise-peer-as

<b>Syntax</b>	no-advertise-peer-as;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> neighbor <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Enable the default behavior of suppressing AS routes.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring BGP Route Advertisement on page 2803</a></li> <li>• <a href="#">Understanding Route Advertisement on page 2803</a></li> <li>• <a href="#">advertise-peer-as on page 2976</a></li> </ul>



## no-aggregator-id

<b>Syntax</b>	no-aggregator-id;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> neighbor <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Prevent different routers within an AS from creating aggregate routes that contain different AS paths.</p> <p>Junos OS performs route aggregation, which is the process of combining the characteristics of different routes so that only a single route is advertised. Aggregation reduces the amount of information that BGP must store and exchange with other BGP systems. When aggregation occurs, the local routing device adds the local AS number and the router ID to the aggregator path attribute. The <b>no-aggregator-id</b> statement causes Junos OS to place a 0 in the router ID field and thus eliminate the possibility of having multiple aggregate advertisements in the network, each with different path information.</p>
<b>Default</b>	If you omit this statement, the router ID is included in the BGP aggregator path attribute.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Update Messages on page 2642</a></li> </ul>



## no-client-reflect

<b>Syntax</b>	no-client-reflect;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Disable intracluster route redistribution by the system acting as the route reflector. Include this statement when the client cluster is fully meshed to prevent the sending of redundant route advertisements. Route reflection provides a way to decrease BGP control traffic and minimizing the number of update messages sent within the AS.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring BGP Route Reflectors on page 2900</a></li> <li>• <a href="#">cluster on page 2992</a></li> </ul>




## out-delay

<b>Syntax</b>	<code>out-delay seconds;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i> <b>neighbor</b> <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Specify how long a route must be present in the Junos OS routing table before it is exported to BGP. Use this time delay to help bundle routing updates.</p> <p>When configured, the <b>out-delay</b> value displays as <b>Outbound Timer</b> when using <b>show bgp group</b> or <b>show bgp group neighbor</b> commands.</p>
<b>Default</b>	If you omit this statement, routes are exported to BGP immediately after they have been added to the routing table.
<b>Options</b>	<p><b>seconds</b>—Output delay time.</p> <p><b>Range:</b> 0 through 65,535 seconds</p> <p><b>Default:</b> 0 seconds</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Understanding Route Advertisement on page 2803</a></li> </ul>



## outbound-route-filter

<b>Syntax</b>	<pre> outbound-route-filter {     <b>bgp-orf-cisco-mode</b>;     prefix-based {         accept {             (inet   inet6);         }     } } </pre>
<b>Hierarchy Level</b>	<pre> [edit logical-systems <i>logical-system-name</i> protocols bgp], [edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i>], [edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>], [edit protocols bgp], [edit protocols bgp group <i>group-name</i>], [edit protocols bgp group <i>group-name</i> neighbor <i>address</i>], [edit routing-instances <i>routing-instance-name</i> protocols bgp], [edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>] </pre>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.2.</p> <p>Statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Configure a BGP peer to accept outbound route filters from a remote peer.
<b>Options</b>	<p><b>accept</b>—Specify that outbound route filters from a BGP peer be accepted.</p> <p><b>inet</b>—Specify that IPv4 prefix-based outbound route filters be accepted.</p> <p><b>inet6</b>—Specify that IPv6 prefix-based outbound route filters be accepted.</p>
	<div>  <p><b>NOTE:</b> You can specify that both IPv4 and IPv6 outbound route filters be accepted.</p> </div>
	<p><b>prefix-based</b>—Specify that prefix-based filters be accepted.</p> <p>The <b>bgp-orf-cisco-mode</b> statement is explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>



- Related Documentation**
- [Example: Configuring BGP Prefix-Based Outbound Route Filtering on page 2807](#)

---

## passive (Protocols BGP)

---

<b>Syntax</b>	passive;
<b>Hierarchy Level</b>	<pre>[edit logical-systems <i>logical-system-name</i> protocols bgp], [edit logical-systems <i>logical-system-name</i> protocols bgp <i>group group-name</i>], [edit logical-systems <i>logical-system-name</i> protocols bgp <i>group group-name</i> <i>neighbor address</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name neighbor address</i>], [edit protocols bgp], [edit protocols bgp <i>group group-name</i>], [edit protocols bgp <i>group group-name neighbor address</i>], [edit routing-instances <i>routing-instance-name</i> protocols bgp], [edit routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols bgp <i>group group-name</i> <i>neighbor address</i>]</pre>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Configure the router so that active open messages are not sent to the peer. Once you configure the routing device to be passive, the routing device will wait for the peer to issue an open request before a message is sent.
<b>Default</b>	If you omit this statement, all explicitly configured peers are active, and each peer periodically sends open requests until its peer responds.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	• <a href="#">Example: Preventing BGP Session Flaps When VPN Families Are Configured on page 2945</a>



## path-selection

<b>Syntax</b>	<pre> path-selection {   (always-compare-med   cisco-non-deterministic   external-router-id);   as-path-ignore;   l2vpn-use-bgp-rules;   med-plus-igp {     igp-multiplier <i>number</i>;     med-multiplier <i>number</i>;   } } </pre>
<b>Hierarchy Level</b>	<pre> [edit logical-systems <i>logical-system-name</i> protocols bgp], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   bgp], [edit protocols bgp], [edit routing-instances <i>routing-instance-name</i> protocols bgp] </pre>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p><b>med-plus-igp</b> option introduced in Junos OS Release 8.1.</p> <p><b>as-path-ignore</b> and <b>l2vpn-use-bgp-rules</b> options introduced in Junos OS Release 10.2.</p>
<b>Description</b>	Configure BGP path selection.
<b>Default</b>	If the <b>path-selection</b> statement is not included in the configuration, only the multiple exit discriminators (MEDs) of routes that have the same peer ASs are compared.
<b>Options</b>	<b>always-compare-med</b> —Always compare MEDs whether or not the peer ASs of the compared routes are the same.



**NOTE:** We recommend that you configure the **always-compare-med** option.

**as-path-ignore**—In the best-path algorithm, skip the step that compares the autonomous system (AS) path lengths. By default, the best-path algorithm evaluates the length of the AS paths and prefers the route with the shortest AS path length.



**NOTE:** The **as-path-ignore** statement is not supported with routing instances.

**cisco-non-deterministic**—Emulate the Cisco IOS default behavior. This mode evaluates routes in the order that they are received and does not group them according to their neighboring AS. With **cisco-non-deterministic** mode, the active path is always first. All inactive, but eligible, paths follow the active path and are maintained in the order



in which they were received, with the most recent path first. Ineligible paths remain at the end of the list.

As an example, suppose you have three path advertisements for the 192.168.1.0 /24 route:

- Path 1—learned through EBGP; AS Path of 65010; MED of 200
- Path 2—learned through IBGP; AS Path of 65020; MED of 150; IGP cost of 5
- Path 3—learned through IBGP; AS Path of 65010; MED of 100; IGP cost of 10

These advertisements are received in quick succession, within a second, in the order listed. Path 3 is received most recently, so the routing device compares it against path 2, the next most recent advertisement. The cost to the IBGP peer is better for path 2, so the routing device eliminates path 3 from contention. When comparing paths 1 and 2, the routing device prefers path 1 because it is received from an EBGP peer. This allows the routing device to install path 1 as the active path for the route.



**NOTE:** We do not recommend using this configuration option in your network. It is provided solely for interoperability to allow all routing devices in the network to make consistent route selections.

**external-router-id**—Compare the router ID between external BGP paths to determine the active path.

**igp-multiplier *number***—The multiplier value for the IGP cost to a next-hop address. This option is useful for making the MED and IGP cost comparable.

**Range:** 1 through 1000

**Default:** 1

**med-multiplier *number***—The multiplier value for the MED calculation. This option is useful for making the MED and IGP cost comparable.

**Range:** 1 through 1000

**Default:** 1

**med-plus-igp**—Add the IGP cost to the indirect next-hop destination to the MED before comparing MED values for path selection. This statement only affects best-path selection. It does not affect the advertised MED.

The other option is explained separately.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding BGP Path Selection on page 2827</a></li><li>• <a href="#">Example: Ignoring the AS Path Attribute When Selecting the Best Path on page 2830</a></li></ul>
------------------------------	---



## peer-as (Protocols BGP)

<b>Syntax</b>	<code>peer-as <i>autonomous-system</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> neighbor <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Specify the neighbor (peer) autonomous system (AS) number.</p> <p>For EBGP, the peer is in another AS, so the AS number you specify in the <b>peer-as</b> statement must be different from the local router's AS number, which you specify in the <b>autonomous-system</b> statement. For IBGP, the peer is in the same AS, so the two AS numbers that you specify in the <b>autonomous-system</b> and <b>peer-as</b> statements must be the same.</p> <p>The AS numeric range in plain-number format has been extended in Junos OS Release 9.1 to provide BGP support for 4-byte AS numbers, as defined in RFC 4893, <i>BGP Support for Four-octet AS Number Space</i>. RFC 4893 introduces two new optional transitive BGP attributes, AS4_PATH and AS4_AGGREGATOR. These new attributes are used to propagate 4-byte AS path information across BGP speakers that do not support 4-byte AS numbers. RFC 4893 also introduces a reserved, well-known, 2-byte AS number, AS 23456. This reserved AS number is called AS_TRANS in RFC 4893. All releases of the Junos OS support 2-byte AS numbers.</p> <p>In Junos OS Release 9.2 and later, you can also configure a 4-byte AS number using the AS-dot notation format of two integer values joined by a period: <i>&lt;16-bit high-order value in decimal&gt;.&lt;16-bit low-order value in decimal&gt;</i>. For example, the 4-byte AS number of 65,546 in plain-number format is represented as 1.10 in the AS-dot notation format.</p> <p>With the introduction of 4-byte AS numbers, you might have a combination of routers that support 4-byte AS numbers and 2-byte AS numbers. For more information about what happens when establishing BGP peer relationships between 4-byte and 2-byte capable routers, see the following topics:</p>



- Establishing a Peer Relationship Between a 4-Byte Capable Router and a 2-Byte Capable Router Using a 2-Byte AS Number in the *Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview*.
- Establishing a Peer Relationship Between a 4-Byte Capable Router and a 2-Byte Capable Router Using a 4-Byte AS Number in the *Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview*.

**Options** *autonomous-system*—AS number.

**Range:** 1 through 4,294,967,295 ( $2^{32} - 1$ ) in plain-number format for 4-byte AS numbers

**Range:** 1 through 65,535 in plain-number format for 2-byte AS numbers (this is a subset of the 4-byte range)

**Range:** 0.0 through 65535.65535 in AS-dot notation format for 4-byte AS numbers

**Required Privilege** routing—To view this statement in the configuration.

**Level** routing-control—To add this statement to the configuration.

**Related Documentation**

- 4-Byte Autonomous System Numbers Overview in the [Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview](#)

- Juniper Networks Implementation of 4-Byte Autonomous System Numbers in the [Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview](#)



## preference (Protocols BGP)

<b>Syntax</b>	<code>preference preference;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp <b>group</b> <i>group-name</i> neighbor <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp <b>group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> <b>neighbor</b> <i>address</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Specify the preference for routes learned from BGP.</p> <p>At the BGP global level, the preference statement sets the preference for routes learned from BGP. You can override this preference in a BGP group or peer preference statement.</p> <p>At the group or peer level, the preference statement sets the preference for routes learned from the group or peer. Use this statement to override the preference set in the BGP global preference statement when you want to favor routes from one group or peer over those of another.</p>
<b>Options</b>	<p><b>preference</b>—Preference to assign to routes learned from BGP or from the group or peer.</p> <p><b>Range:</b> 0 through 4,294,967,295 (<math>2^{32} - 1</math>)</p> <p><b>Default:</b> 170 for the primary preference</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">local-preference on page 3024</a></li> <li>• <a href="#">Example: Configuring the Preference Value for BGP Routes on page 2821</a></li> </ul>



## remove-private

**Syntax**    `remove-private all replace nearest;`

**Hierarchy Level**    [edit logical-systems *logical-system-name* protocols bgp],  
                           [edit logical-systems *logical-system-name* protocols bgp **group** *group-name*],  
                           [edit logical-systems *logical-system-name* protocols bgp **group** *group-name* neighbor *address*],  
                           [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols  
                           bgp],  
                           [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols  
                           bgp **group** *group-name*],  
                           [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols  
                           bgp group *group-name* **neighbor** *address*],  
                           [edit protocols bgp],  
                           [edit protocols bgp **group** *group-name*],  
                           [edit protocols bgp group *group-name* **neighbor** *address*],  
                           [edit routing-instances *routing-instance-name* protocols bgp],  
                           [edit routing-instances *routing-instance-name* protocols bgp **group** *group-name*],  
                           [edit routing-instances *routing-instance-name* protocols bgp group *group-name* **neighbor**  
                           *address*]

**Release Information**    Statement introduced before Junos OS Release 7.4.  
                                   Statement introduced in Junos OS Release 9.0 for EX Series switches.  
                                   Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description**    When advertising AS paths to remote systems, have the local system strip private AS numbers from the AS path. The numbers are stripped from the AS path starting at the left end of the AS path (the end where AS paths have been most recently added). The routing device stops searching for private ASs when it finds the first nonprivate AS or a peer's private AS. If the AS path contains the AS number of the external BGP (EBGP) neighbor, BGP does not remove the private AS number.



**NOTE:** As of Junos OS 10.0R2 and higher, if there is a need to send prefixes to an EBGP peer that has an AS number that matches an AS number in the AS path, consider using the `as-override` statement instead of the `remove-private` statement.

The operation takes place after any confederation member ASs have already been removed from the AS path, if applicable.

The Junos OS recognizes the set of AS numbers that is considered private, a range that is defined in the Internet Assigned Numbers Authority (IANA) assigned numbers document.

The set of reserved AS numbers is in the range from 64,512 through 65,535.

**Options**    **all**—Remove all private AS numbers from the original path. Do not stop the process of removing private AS numbers, even if a public AS number is encountered.



**nearest**—When you use the **all** and **replace** options, choose the last (right-most) public AS number encountered in the original AS path for the replacement value, as the AS path is processed from left to right. If no public AS number is encountered, the default replacement value is used. (See the **replace** option for information about the default replacement value.)

**replace**—When you use the **all** option, instead of removing private AS numbers, perform a replace operation. The default replacement value for the private AS number is the local AS number at the BGP group level for the BGP peer. If you are unsure about the replacement value, check the local AS value displayed in the output of the **show bgp group group-name** command.

<b>Required Privilege</b>	routing—To view this statement in the configuration.
<b>Level</b>	routing-control—To add this statement to the configuration.

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Removing Private AS Numbers from AS Paths on page 2839</a></li></ul>
------------------------------	---



## restart-time (BGP Graceful Restart)

---

<b>Syntax</b>	<code>restart-time seconds;</code>
<b>Hierarchy Level</b>	<code>[edit protocols (bgp   rip   ripng) graceful-restart],</code> <code>[edit logical-systems <i>logical-system-name</i> protocols (bgp   rip   ripng) graceful-restart (Enabling Globally)],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp graceful-restart],</code> <code>[edit routing-instances <i>routing-instance-name</i> protocols bgp graceful-restart]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 8.3. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure the duration of the BGP, RIP, or next-generation RIP (RIPng) graceful restart period.
<b>Options</b>	<b>seconds</b> —Length of time for the graceful restart period. <b>Range:</b> 1 through 600 seconds <b>Default:</b> Varies by protocol: <ul style="list-style-type: none"><li>• BGP—120 seconds</li><li>• RIP and RIPng—60 seconds</li></ul>
<b>Required Privilege Level</b>	<code>routing</code> —To view this statement in the configuration. <code>routing-control</code> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Graceful Restart Options for BGP on page 1781</a></li><li>• <a href="#">Configuring Graceful Restart Options for RIP and RIPng on page 1785</a></li><li>• <a href="#">Configuring Graceful Restart for QFabric Systems on page 1777</a></li><li>• <a href="#">stale-routes-time on page 1815</a></li></ul>



## session-mode

<b>Syntax</b>	<code>session-mode (automatic   multihop   single-hop);</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection],</p> <p>[edit protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 11.1.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Configure BFD session mode to be single-hop or multihop. By default, BGP uses single-hop BFD sessions if the peer is directly connected to the router's interface. BGP uses multihop BFD sessions if the peer is not directly connected to the router's interface. If the peer session's <b>local-address</b> option is configured, the directly connected check is based partly on the source address that would be used for BGP and BFD.</p> <p>For backward compatibility, you can override the default behavior by configuring the <b>single-hop</b> or <b>multihop</b> option. Before Junos OS Release 11.1, the behavior was to assume that IBGP peer sessions were multihop.</p>
<b>Options</b>	<p><b>automatic</b>—Configure BGP to use single-hop BFD sessions if the peer is directly connected to the router's interface, and multihop BFD sessions if the peer is not directly connected to the router's interface</p> <p><b>multihop</b>—Configure BGP to use multihop BFD sessions.</p> <p><b>single-hop</b>—Configure BGP to use single-hop BFD sessions.</p> <p><b>Default:</b> automatic</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring BFD Authentication for BGP on page 2854</a></li> <li>• <a href="#">Example: Configuring BFD on Internal BGP Peer Sessions on page 2845</a></li> </ul>



- [Example: Configuring BFD Authentication for BGP on page 2854](#)
- [Understanding BFD Authentication for BGP on page 2853](#)

## stale-routes-time

---

Syntax	stale-routes-time <i>seconds</i> ;
Hierarchy Level	[edit logical-systems <i>logical-routing-name</i> protocols bgp <a href="#">graceful-restart</a> ], [edit logical-systems <i>logical-routing-name</i> routing-instances <i>routing-instance-name</i> protocols bgp <a href="#">graceful-restart</a> ], [edit protocols bgp <a href="#">graceful-restart</a> ], [edit routing-instances <i>routing-instance-name</i> protocols bgp <a href="#">graceful-restart</a> ]
Release Information	Statement introduced in Junos OS Release 8.3. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Specify the maximum time that stale routes are kept during a restart. The <b>stale-routes-time</b> statement allows you to set the length of time the routing device waits to receive messages from restarting neighbors before declaring them down.
Options	<b>seconds</b> —Time the router waits to receive messages from restarting neighbors before declaring them down. <b>Range:</b> 1 through 600 seconds <b>Default:</b> 300 seconds
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring Graceful Restart Options for BGP on page 1781</a></li><li>• <a href="#">Configuring Graceful Restart for QFabric Systems on page 1777</a></li><li>• <a href="#">restart-time (BGP Graceful Restart) on page 1814</a></li></ul>




## tcp-mss (Protocols BGP)

<b>Syntax</b>	<code>tcp-mss <i>segment-size</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>neighbor-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>neighbor-name</i>],</p> <p>[edit protocols bgp],</p> <p>[edit protocol bgp group <i>group-name</i>],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>neighbor-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>neighbor-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.1.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Configure the maximum segment size (MSS) for the TCP connection for BGP neighbors.</p> <p>The MSS is only valid in increments of 2 KB. The value used is based on the value set, but is rounded down to the nearest multiple of 2048.</p>
<b>Options</b>	<p><b><i>segment-size</i></b>—MSS for the TCP connection.</p> <p><b>Range:</b> 1 through 4096</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Limiting TCP Segment Size for BGP on page 2940</a></li> </ul>



## threshold (BGP BFD Detection Time)


<b>Syntax</b>	<code>threshold <i>milliseconds</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp bfd-liveness-detection detection-time],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection detection-time],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection detection-time],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection detection-time],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection detection-time],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection detection-time],</p> <p>[edit protocols bgp bgp bfd-liveness-detection],</p> <p>[edit protocols bgp group <i>group-name</i> bfd-liveness-detection detection-time],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i> bgp bfd-liveness-detection detection-time],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection detection-time],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection detection-time],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection detection-time]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.2.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for BFD authentication introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Specify the threshold for the adaptation of the BFD session detection time. When the detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.
<div>  <p><b>NOTE:</b> The threshold value must be equal to or greater than the transmit interval.</p> <p>The threshold time must be equal to or greater than the value specified in the <code>minimum-interval</code> or the <code>minimum-receive-interval</code> statement.</p> </div>	
<b>Options</b>	<p><i>milliseconds</i>—Value for the detection time adaptation threshold.</p> <p><b>Range:</b> 1 through 255,000</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>



- Related Documentation**
- [Example: Configuring BFD for Static Routes on page 2328](#)




## threshold (BGP BFD Transmit Interval)

<b>Syntax</b>	<code>threshold <i>milliseconds</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp bfd-liveness-detection transmit-interval],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection transmit-interval],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection transmit-interval],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection transmit-interval],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection transmit-interval],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection transmit-interval],</p> <p>[edit protocols bgp bfd-liveness-detection transmit-interval],</p> <p>[edit protocols bgp group <i>group-name</i> bfd-liveness-detection transmit-interval],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i> bgp bfd-liveness-detection transmit-interval],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection transmit-interval],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection transmit-interval],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection transmit-interval]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.2.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Specify the threshold for the adaptation of the BFD session transmit interval. When the transmit interval adapts to a value greater than the threshold, a single trap and a single system message are sent.
<b>Options</b>	<p><i>milliseconds</i>—Value for the transmit interval adaptation threshold.</p> <p><b>Range:</b> 0 through 4,294,967,295 (<math>2^{32} - 1</math>)</p>
<div>  <p><b>NOTE:</b> The threshold value specified in the <code>threshold</code> statement must be greater than the value specified in the <code>minimum-interval</code> statement for the <code>transmit-interval</code> statement.</p> </div>	
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring BFD for Static Routes on page 2328</a></li> <li>• <a href="#">bfd-liveness-detection on page 2985</a></li> </ul>



## traceoptions (Protocols BGP)

<b>Syntax</b>	<pre> traceoptions {     file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i> &lt;flag-modifier&gt; &lt;disable&gt;; } </pre>
<b>Hierarchy Level</b>	<pre> [edit logical-systems <i>logical-system-name</i> protocols bgp], [edit logical-systems <i>logical-system-name</i> protocols bgp <i>group</i> <i>group-name</i>], [edit logical-systems <i>logical-system-name</i> protocols bgp <i>group</i> <i>group-name</i> neighbor <i>address</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   bgp], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   bgp <i>group</i> <i>group-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   bgp <i>group</i> <i>group-name</i> neighbor <i>address</i>], [edit protocols bgp], [edit protocols bgp <i>group</i> <i>group-name</i>], [edit protocols bgp <i>group</i> <i>group-name</i> neighbor <i>address</i>], [edit routing-instances <i>routing-instance-name</i> protocols bgp], [edit routing-instances <i>routing-instance-name</i> protocols bgp <i>group</i> <i>group-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols bgp <i>group</i> <i>group-name</i> neighbor   <i>address</i>] </pre>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p><b>4byte-as</b> statement introduced in Junos OS Release 9.2.</p> <p><b>4byte-as</b> statement introduced in Junos OS Release 9.2 for EX Series switches.</p>
<b>Description</b>	Configure BGP protocol-level tracing options. To specify more than one tracing operation, include multiple flag statements.
<div>  <p><b>NOTE:</b> The <b>traceoptions</b> statement is not supported on QFabric systems.</p> </div>	
<b>Default</b>	The default BGP protocol-level tracing options are inherited from the routing protocols <b>traceoptions</b> statement included at the <b>[edit routing-options]</b> hierarchy level. The default group-level trace options are inherited from the BGP protocol-level <b>traceoptions</b> statement. The default peer-level trace options are inherited from the group-level <b>traceoptions</b> statement.
<b>Options</b>	<p><b>disable</b>—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as <b>all</b>.</p> <p><b>file <i>name</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory <b>/var/log</b>. We recommend that you place BGP tracing output in the file <b>bgp-log</b>.</p>



**files *number***—(Optional) Maximum number of trace files. When a trace file named ***trace-file*** reaches its maximum size, it is renamed ***trace-file.0***, then ***trace-file.1***, and so on, until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. If you specify a maximum number of files, you must also specify a maximum file size with the **size** option.

**Range:** 2 through 1000 files

**Default:** 10 files

**flag**—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements.

#### BGP Tracing Flags

- **4byte-as**—4-byte AS events.
- **bfd**—BFD protocol events.
- **damping**—Damping operations.
- **graceful-restart**—Graceful restart events.
- **keepalive**—BGP keepalive messages. If you enable the the BGP **update** flag only, received keepalive messages do not generate a trace message.
- **nsr-synchronization**—Nonstop routing synchronization events.
- **open**—Open packets. These packets are sent between peers when they are establishing a connection.
- **packets**—All BGP protocol packets.
- **refresh**—BGP refresh packets.
- **update**—Update packets. These packets provide routing updates to BGP systems. If you enable only this flag, received keepalive messages do not generate a trace message. Use the **keepalive** flag to generate a trace message for keepalive messages.

#### Global Tracing Flags

- **all**—All tracing operations
- **general**—A combination of the **normal** and **route** trace operations
- **normal**—All normal operations

**Default:** If you do not specify this option, only unusual or abnormal operations are traced.

- **policy**—Policy operations and actions
- **route**—Routing table changes
- **state**—State transitions
- **task**—Routing protocol task processing
- **timer**—Routing protocol timer processing



**flag-modifier**—(Optional) Modifier for the tracing flag. You can specify one or more of these modifiers:

- **detail**—Provide detailed trace information.
- **filter**—Provide filter trace information. Applies only to **route** and **damping** tracing flags.
- **receive**—Trace the packets being received.
- **send**—Trace the packets being transmitted.

**no-world-readable**—(Optional) Prevent any user from reading the log file.

**size size**—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches this size, it is renamed **trace-file.0**. When the **trace-file** again reaches its maximum size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. If you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

**Syntax:** **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

**Range:** 10 KB through the maximum file size supported on your system

**Default:** 128 KB

**world-readable**—(Optional) Allow any user to read the log file.

<b>Required Privilege Level</b>	<p>routing and trace—To view this statement in the configuration.</p> <p>routing-control and trace-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">log-updown on page 3025</a> statement</li> <li>• <a href="#">Understanding Trace Operations for BGP Protocol Traffic on page 2966</a></li> <li>• <a href="#">Configuring OSPF Refresh and Flooding Reduction in Stable Topologies on page 3344</a></li> </ul>



## transmit-interval (BGP BFD Liveness Detection)

<b>Syntax</b>	<pre>transmit-interval {     minimum-interval milliseconds;     threshold milliseconds; }</pre>
<b>Hierarchy Level</b>	<pre>[edit logical-systems <i>logical-system-name</i> protocols bgp bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i>   bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i>   bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   bgp bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   bgp group <i>group-name</i> bfd-liveness-detection], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection], [edit protocols bgp bfd-liveness-detection], [edit protocols bgp group <i>group-name</i> bfd-liveness-detection], [edit protocols bgp group <i>group-name</i> neighbor <i>address</i> bgp bfd-liveness-detection], [edit routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection], [edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i>   bfd-liveness-detection], [edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor   <i>address</i> bfd-liveness-detection]</pre>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.2.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for BFD authentication introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Specify the transmit interval for the <b>bfd-liveness-detection</b> statement. The negotiated transmit interval for a peer is the interval between the sending of BFD packets to peers. The receive interval for a peer is the minimum time that it requires between packets sent from its peer; the receive interval is not negotiated between peers. To determine the transmit interval, each peer compares its configured minimum transmit interval with its peer's minimum receive interval. The larger of the two numbers is accepted as the transmit interval for that peer.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring BFD for Static Routes on page 2328</a></li> <li>• <a href="#">bfd-liveness-detection on page 2985</a></li> <li>• <a href="#">threshold on page 3064</a></li> <li>• <a href="#">minimum-interval on page 3033</a></li> <li>• <a href="#">minimum-receive-interval on page 3035</a></li> </ul>



## version (BGP BFD Liveness Detection)

<b>Syntax</b>	version (1   automatic);
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection],</p> <p>[edit protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp bfd-liveness-detection],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> bfd-liveness-detection],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> bfd-liveness-detection]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.1</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Specify the BFD version for detection. You can explicitly configure BFD version 1, or the routing device can automatically detect the BFD version. By default, the routing device automatically detects the BFD version, which is either 0 or 1.
<b>Options</b>	<p>Configure the BFD version to detect: <b>1</b> (BFD version 1) or <b>automatic</b> (autodetect the BFD version)</p> <p><b>Default:</b> automatic</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring BFD Authentication for BGP on page 2854</a></li> <li>• <a href="#">Example: Configuring BFD on Internal BGP Peer Sessions on page 2845</a></li> <li>• <a href="#">Example: Configuring BFD Authentication for BGP on page 2854</a></li> <li>• <a href="#">Understanding BFD Authentication for BGP on page 2853</a></li> </ul>







## CHAPTER 33

# Administration

- [Routine Monitoring on page 3071](#)
- [Operational Commands on page 3071](#)

## Routine Monitoring

---

- [Monitoring BGP Routing Information on page 3071](#)

### Monitoring BGP Routing Information

**Purpose** Use the monitoring functionality to monitor BGP routing information on the routing device.

**Action** To view BGP routing information in the CLI, enter the following commands:

- **show bgp summary**
- **show bgp neighbor**

## Operational Commands

---



## clear bgp damping

---

<b>Syntax</b>	clear bgp damping <logical-system (all   <i>logical-system-name</i> )> < <i>prefix</i> >
<b>Syntax (EX Series Switch and QFX Series)</b>	clear bgp damping < <i>prefix</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Clear BGP route flap damping information.
<b>Options</b>	<b>none</b> —Clear all BGP route flap damping information.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.  <b><i>prefix</i></b> —(Optional) Clear route flap damping information for only the specified destination prefix.
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show policy damping on page 3103</a></li><li>• <a href="#">show route damping on page 2488</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear bgp damping on page 3072</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

**clear bgp damping**      user@host> clear bgp damping



## clear bgp neighbor

<b>Syntax</b>	<pre>clear bgp neighbor &lt;as <i>as-number</i>&gt; &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;neighbor&gt; &lt;soft   soft-inbound&gt; &lt;soft-minimum-igp&gt;</pre>
<b>Syntax (EX Series Switch and QFX Series)</b>	<pre>clear bgp neighbor &lt;as <i>as-number</i>&gt; &lt;instance <i>instance-name</i>&gt; &lt;neighbor&gt; &lt;soft   soft-inbound&gt; &lt;soft-minimum-igp&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Perform one of the following tasks:</p> <ul style="list-style-type: none"> <li>Change the state of one or more BGP neighbors to <b>IDLE</b>. For neighbors in the <b>ESTABLISHED</b> state, this command drops the TCP connection to the neighbors and then reestablishes the connection.</li> <li>(<b>soft</b> or <b>soft-inbound</b> keyword only) Reapply export policies or import policies, respectively, and send refresh updates to one or more BGP neighbors without changing their state.</li> </ul>
<b>Options</b>	<p><b>none</b>—Change the state of all BGP neighbors to <b>IDLE</b>.</p> <p><b>as <i>as-number</i></b>—(Optional) Apply this command only to neighbors in the specified autonomous system (AS).</p> <p><b>instance <i>instance-name</i></b>—(Optional) Apply this command only to neighbors for the specified routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>neighbor</b>—(Optional) IP address of a BGP peer. Apply this command only to the specified neighbor.</p> <p><b>soft</b>—(Optional) Reapply any export policies and send refresh updates to neighbors without clearing the state.</p> <p><b>soft-inbound</b>—(Optional) Reapply any import policies and send refresh updates to neighbors without clearing the state.</p>



**soft-minimum-igp**—(Optional) Provides soft refresh of the outbound state when the interior gateway protocol (IGP) metric is reset.

**Required Privilege Level** clear

**Related Documentation** • [show bgp neighbor on page 1842](#)

**List of Sample Output** [clear bgp neighbor on page 3074](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request.

## Sample Output

**clear bgp neighbor** user@host> clear bgp neighbor



## clear bgp table

---

<b>Syntax</b>	<code>clear bgp table <i>table-name</i></code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>
<b>Syntax (EX Series Switch and QFX Series)</b>	<code>clear bgp table <i>table-name</i></code>
<b>Release Information</b>	Command introduced in Junos OS Release 9.0. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Request that BGP refresh routes in a specified routing table.
<b>Options</b>	<b><code>logical-system (all   <i>logical-system-name</i>)</code></b> —(Optional) Perform this operation on all logical systems or on a particular logical system.  <b><code>table-name</code></b> —Request that BGP refresh routes in the specified table.
<b>Additional Information</b>	In some cases, a prefix limit is associated with a routing table for a VPN instance. When this limit is exceeded (for example, because of a network misconfiguration), some routes might not be inserted in the table. Such routes need to be added to the table after the network issue is resolved. Use the <b>clear bgp table</b> command to request that BGP refresh routes in a VPN instance table.
<b>Required Privilege Level</b>	clear
<b>List of Sample Output</b>	<a href="#">clear bgp table private.inet.0 on page 3076</a> <a href="#">clear bgp table inet.6 logical-system all on page 3076</a> <a href="#">clear bgp table private.inet.6 logical-system ls1 on page 3076</a> <a href="#">clear bgp table logical-system all inet.0 on page 3076</a> <a href="#">clear bgp table logical-system ls2 private.inet.0 on page 3076</a>
<b>Output Fields</b>	This command produces no output.



## Sample Output

clear bgp table  
private.inet.0

user@host> clear bgp table private.inet.0

clear bgp table inet.6  
logical-system all

user@host> clear bgp table inet.6 logical-system all

clear bgp table  
private.inet.6  
logical-system ls1

user@host> clear bgp table private.inet.6 logical-system ls1

clear bgp table  
logical-system all  
inet.0

user@host> clear bgp table logical-system all inet.0

clear bgp table  
logical-system ls2  
private.inet.0

user@host> clear bgp table logical-system ls2 private.inet.0



## show bgp group

<b>Syntax</b>	<pre>show bgp group &lt;brief   detail   summary&gt; &lt;group-name&gt; &lt;exact-instance instance-name&gt; &lt;instance instance-name&gt; &lt;logical-system (all   logical-system-name)&gt; &lt;rtf&gt;</pre>
<b>Syntax (EX Series Switch and QFX Series)</b>	<pre>show bgp group &lt;brief   detail   summary&gt; &lt;group-name&gt; &lt;exact-instance instance-name&gt; &lt;instance instance-name&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p> <p><b>exact-instance</b> option introduced in Junos OS Release 11.4.</p>
<b>Description</b>	Display information about the configured BGP groups.
<b>Options</b>	<p><b>none</b>—Display group information about all BGP groups.</p> <p><b>brief   detail   summary</b>—(Optional) Display the specified level of output.</p> <p><b>group-name</b>—(Optional) Display group information for the specified group.</p> <p><b>exact-instance instance-name</b>—(Optional) Display information for the specified instance only.</p> <p><b>instance instance-name</b>—(Optional) Display information about BGP groups for all routing instances whose name begins with this string (for example, <b>cust1</b>, <b>cust11</b>, and <b>cust111</b> are all displayed when you run the <b>show bgp group instance cust1</b> command). The instance name can be master for the main instance, or any valid configured instance name or its prefix.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>rtf</b>—(Optional) Display BGP group route targeting information.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<p><a href="#">show bgp group on page 3082</a></p> <p><a href="#">show bgp group brief on page 3082</a></p> <p><a href="#">show bgp group detail on page 3082</a></p> <p><a href="#">show bgp group rtf detail on page 3083</a></p> <p><a href="#">show bgp group summary on page 3083</a></p>



**Output Fields** Table 205 on page 3078 describes the output fields for the **show bgp group** command. Output fields are listed in the approximate order in which they appear.

Table 205: show bgp group Output Fields

Field Name	Field Description	Level of Output
Group Type or Group	Type of BGP group: <b>Internal</b> or <b>External</b> .	All levels
group-index	Index number for the BGP peer group. The index number differentiates between groups when a single BGP group is split because of different configuration options at the group and peer levels.	<b>rtf detail</b>
AS	AS number of the peer. For internal BGP (IBGP), this number is the same as <b>Local AS</b> .	<b>brief detail</b> none
Local AS	AS number of the local routing device.	<b>brief detail</b> none
Name	Name of a specific BGP group.	<b>brief detail</b> none
Index	Unique index number of a BGP group.	<b>brief detail</b> none
Flags	Flags associated with the BGP group. This field is used by Juniper Networks customer support.	<b>brief detail</b> none
Remove-private options	Options associated with the <b>remove-private</b> statement.	<b>brief detail</b> none
Holdtime	Maximum number of seconds allowed to elapse between successive keepalive or update messages that BGP receives from a peer in the BGP group, after which the connection to the peer is closed and routing devices through that peer become unavailable.	<b>brief detail</b> none
Export	Export policies configured for the BGP group with the <b>export</b> statement.	<b>brief detail</b> none
MED tracks IGP metric update delay	Time, in seconds, that updates to multiple exit discriminator (MED) are delayed. Also displays the time remaining before the interval is set to expire	All levels
Traffic Statistics Interval	Time between sample periods for labeled-unicast traffic statistics, in seconds.	<b>brief detail</b> none
Total peers	Total number of peers in the group.	<b>brief detail</b> none
Established	Number of peers in the group that are in the established state.	All levels



Table 205: show bgp group Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Active/Received/Accepted/Damped</b>	<p>Multipurpose field that displays information about BGP peer sessions. The field's contents depend upon whether a session is established and whether it was established in the main routing device or in a routing instance.</p> <ul style="list-style-type: none"> <li>If a peer is not established, the field shows the state of the peer session: <b>Active</b>, <b>Connect</b>, or <b>Idle</b>.</li> <li>If a BGP session is established in the main routing device, the field shows the number of active, received, accepted, and damped routes that are received from a neighbor and appear in the <b>inet.0</b> (main) and <b>inet.2</b> (multicast) routing tables. For example, <b>8/10/10/2</b> and <b>2/4/4/0</b> indicate the following: <ul style="list-style-type: none"> <li>8 active routes, 10 received routes, 10 accepted routes, and 2 damped routes from a BGP peer appear in the <b>inet.0</b> routing table.</li> <li>2 active routes, 4 received routes, 4 accepted routes, and no damped routes from a BGP peer appear in the <b>inet.2</b> routing table.</li> </ul> </li> </ul>	<b>summary</b>
<b>ip-addresses</b>	List of peers who are members of the group. The address is followed by the peer's port number.	All levels
<b>Route Queue Timer</b>	Number of seconds until queued routes are sent. If this time has already elapsed, this field displays the number of seconds by which the updates are delayed.	<b>detail</b>
<b>Route Queue</b>	Number of prefixes that are queued up for sending to the peers in the group.	<b>detail</b>
<b>inet.number</b>	<p>Number of active, received, accepted, and damped routes in the routing table. For example, <b>inet.0: 7/10/9/0</b> indicates the following:</p> <ul style="list-style-type: none"> <li>7 active routes, 10 received routes, 9 accepted routes, and no damped routes from a BGP peer appear in the <b>inet.0</b> routing table.</li> </ul>	none



Table 205: show bgp group Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Table inet.number</b>	Information about the routing table. <ul style="list-style-type: none"> <li>• <b>Received prefixes</b>—Total number of prefixes from the peer, both active and inactive, that are in the routing table.</li> <li>• <b>Active prefixes</b>—Number of prefixes received from the peer that are active in the routing table.</li> <li>• <b>Suppressed due to damping</b>—Number of routes currently inactive because of damping or other reasons. These routes do not appear in the forwarding table and are not exported by routing protocols.</li> <li>• <b>Advertised prefixes</b>—Number of prefixes advertised to a peer.</li> <li>• <b>Received external prefixes</b>—Total number of prefixes from the external BGP (EBGP) peers, both active and inactive, that are in the routing table.</li> <li>• <b>Active external prefixes</b>—Number of prefixes received from the EBGP peers that are active in the routing table.</li> <li>• <b>Externals suppressed</b>—Number of routes received from EBGP peers currently inactive because of damping or other reasons.</li> <li>• <b>Received internal prefixes</b>—Total number of prefixes from the IBGP peers, both active and inactive, that are in the routing table.</li> <li>• <b>Active internal prefixes</b>—Number of prefixes received from the IBGP peers that are active in the routing table.</li> <li>• <b>Internals suppressed</b>—Number of routes received from IBGP peers currently inactive because of damping or other reasons.</li> <li>• <b>RIB State</b>—Status of the graceful restart process for this routing table: <b>BGP restart is complete</b>, <b>BGP restart in progress</b>, <b>VPN restart in progress</b>, or <b>VPN restart is complete</b>.</li> </ul>	<b>detail</b>
<b>Groups</b>	Total number of groups.	All levels
<b>Peers</b>	Total number of peers.	All levels
<b>External</b>	Total number of external peers.	All levels
<b>Internal</b>	Total number of internal peers.	All levels
<b>Down peers</b>	Total number of unavailable peers.	All levels
<b>Flaps</b>	Total number of flaps that occurred.	All levels
<b>Table</b>	Name of a routing table.	<b>brief</b> , none
<b>Tot Paths</b>	Total number of routes.	<b>brief</b> , none
<b>Act Paths</b>	Number of active routes.	<b>brief</b> , none
<b>Suppressed</b>	Number of routes currently inactive because of damping or other reasons. These routes do not appear in the forwarding table and are not exported by routing protocols.	<b>brief</b> , none



Table 205: show bgp group Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>History</b>	Number of withdrawn routes stored locally to keep track of damping history.	<b>brief, none</b>
<b>Damp State</b>	Number of active routes with a figure of merit greater than zero, but lower than the threshold at which suppression occurs.	<b>brief, none</b>
<b>Pending</b>	Routes being processed by the BGP import policy.	<b>brief, none</b>
<b>Group</b>	Group the peer belongs to in the BGP configuration.	<b>detail</b>
<b>Receive mask</b>	Mask of the received target included in the advertised route.	<b>detail</b>
<b>Entries</b>	Number of route entries received.	<b>detail</b>
<b>Target</b>	Route target that is to be passed by route-target filtering. If a route advertised from the provider edge (PE) routing device matches an entry in the route-target filter, the route is passed to the peer.	<b>detail</b>
<b>Mask</b>	Mask which specifies that the peer receive routes with the given route target.	<b>detail</b>



## Sample Output

### show bgp group

```

user@host> show bgp group
Groups: 2 Peers: 2 External: 0 Internal: 2 Down peers: 1 Flaps: 0
Table Tot Paths Act Paths Suppressed History Damp State Pending

inet.0
0 0 0 0 0 0

bgp.l3vpn.0
0 0 0 0 0 0

bgp.rtarget.0
2 0 0 0 0 0

```

### show bgp group brief

```

user@host> show bgp group brief
Groups: 2 Peers: 2 External: 0 Internal: 2 Down peers: 1 Flaps: 0
Table Tot Paths Act Paths Suppressed History Damp State Pending

inet.0
0 0 0 0 0 0

bgp.l3vpn.0
0 0 0 0 0 0

bgp.rtarget.0
2 0 0 0 0 0

```

### show bgp group detail

```

user@host> show bgp group detail
Group Type: Internal AS: 1 Local AS: 1
Name: ibgp Index: 0 Flags: <Export Eval>
Holdtime: 0
Total peers: 3 Established: 0
22.0.0.2
22.0.0.8
22.0.0.5

Groups: 1 Peers: 3 External: 0 Internal: 3 Down peers: 3 Flaps: 3
Table bgp.l3vpn.0
Received prefixes: 0
Accepted prefixes: 0
Active prefixes: 0
Suppressed due to damping: 0
Received external prefixes: 0
Active external prefixes: 0
Externals suppressed: 0
Received internal prefixes: 0
Active internal prefixes: 0
Internals suppressed: 0
RIB State: BGP restart is complete
RIB State: VPN restart is complete
Table bgp.mdt.0
Received prefixes: 0
Accepted prefixes: 0
Active prefixes: 0
Suppressed due to damping: 0
Received external prefixes: 0
Active external prefixes: 0

```



```

Externals suppressed:      0
Received internal prefixes: 0
Active internal prefixes:  0
Internals suppressed:      0
RIB State: BGP restart is complete
RIB State: VPN restart is complete
Table VPN-A.inet.0
Received prefixes:         0
Accepted prefixes:         0
Active prefixes:           0
Suppressed due to damping: 0
Received external prefixes: 0
Active external prefixes:  0
Externals suppressed:      0
Received internal prefixes: 0
Active internal prefixes:  0
Internals suppressed:      0
RIB State: BGP restart is complete
RIB State: VPN restart is complete
Table VPN-A.mdt.0
Received prefixes:         0
Accepted prefixes:         0
Active prefixes:           0
Suppressed due to damping: 0
Received external prefixes: 0
Active external prefixes:  0
Externals suppressed:      0
Received internal prefixes: 0
Active internal prefixes:  0
Internals suppressed:      0
RIB State: BGP restart is complete
RIB State: VPN restart is complete

```

#### show bgp group rtf detail

```

user@host> show bgp group rtf detail
Group: internal (group-index: 0)
  Receive mask: 00000002
  Table: bgp.rtarget.0
    Target      Mask      Entries: 2
    100:100/64  00000002
    200:201/64  (Group)
Group: internal (group-index: 1)
  Table: bgp.rtarget.0
    Target      Mask      Entries: 1
    200:201/64  (Group)

```

#### show bgp group summary

```

user@host> show bgp group summary
Group      Type      Peers      Established      Active/Received/Accepted/Damped
ibgp       Internal  3          0
Groups: 1 Peers: 3 External: 0 Internal: 3 Down peers: 3 Flaps: 3
bgp.l3vpn.0 : 0/0/0/0 External: 0/0/0/0 Internal: 0/0/0/0
bgp.mdt.0   : 0/0/0/0 External: 0/0/0/0 Internal: 0/0/0/0
VPN-A.inet.0 : 0/0/0/0 External: 0/0/0/0 Internal: 0/0/0/0
VPN-A.mdt.0 : 0/0/0/0 External: 0/0/0/0 Internal: 0/0/0/0

```



## show bgp neighbor

---

Syntax	<pre>show bgp neighbor &lt;exact-instance <i>instance-name</i>&gt; &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;neighbor-address&gt; &lt;orf (detail   <i>neighbor-address</i>)</pre>
Syntax (EX Series Switch and QFX Series)	<pre>show bgp neighbor &lt;instance <i>instance-name</i>&gt; &lt;exact-instance <i>instance-name</i>&gt; &lt;neighbor-address&gt; &lt;orf (<i>neighbor-address</i>   detail)</pre>
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p> <p><b>orf</b> option introduced in Junos OS Release 9.2.</p> <p><b>exact-instance</b> option introduced in Junos OS Release 11.4.</p>
Description	Display information about BGP peers.
Options	<p><b>none</b>—Display information about all BGP peers.</p> <p><b>exact-instance <i>instance-name</i></b>—(Optional) Display information for the specified instance only.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display information about BGP peers for all routing instances whose name begins with this string (for example, <b>cust1</b>, <b>cust11</b>, and <b>cust111</b> are all displayed when you run the <b>show bgp neighbor instance cust1</b> command).</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>neighbor-address</b>—(Optional) Display information for only the BGP peer at the specified IP address.</p> <p><b>orf (detail   <i>neighbor-address</i>)</b>—(Optional) Display outbound route-filtering information for all BGP peers or only for the BGP peer at the specified IP address. The default is to display brief output. Use the <b>detail</b> option to display detailed output.</p>
Additional Information	For information about the <b>local-address</b> , <b>nlri</b> , <b>hold-time</b> , and <b>preference</b> statements, see the Junos OS Routing Protocols Configuration Guide.
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">clear bgp neighbor on page 3073</a></li></ul>



**List of Sample Output** [show bgp neighbor on page 3092](#)  
[show bgp neighbor \(CLNS\) on page 3092](#)  
[show bgp neighbor \(Layer 2 VPN\) on page 3093](#)  
[show bgp neighbor \(Layer 3 VPN\) on page 3095](#)  
[show bgp neighbor neighbor-address on page 3096](#)  
[show bgp neighbor neighbor-address on page 3096](#)  
[show bgp neighbor orf neighbor-address detail on page 3097](#)

**Output Fields** [Table 142 on page 1843](#) describes the output fields for the **show bgp neighbor** command. Output fields are listed in the approximate order in which they appear.

**Table 206: show bgp neighbor Output Fields**

Field Name	Field Description
<b>Peer</b>	Address of the BGP neighbor. The address is followed by the neighbor port number.
<b>AS</b>	AS number of the peer.
<b>Local</b>	Address of the local routing device. The address is followed by the peer port number.
<b>Type</b>	Type of peer: <b>Internal</b> or <b>External</b> .
<b>State</b>	<p>Current state of the BGP session:</p> <ul style="list-style-type: none"> <li>• <b>Active</b>—BGP is initiating a transport protocol connection in an attempt to connect to a peer. If the connection is successful, BGP sends an Open message.</li> <li>• <b>Connect</b>—BGP is waiting for the transport protocol connection to be completed.</li> <li>• <b>Established</b>—The BGP session has been established, and the peers are exchanging update messages.</li> <li>• <b>Idle</b>—This is the first stage of a connection. BGP is waiting for a Start event.</li> <li>• <b>OpenConfirm</b>—BGP has acknowledged receipt of an open message from the peer and is waiting to receive a keepalive or notification message.</li> <li>• <b>OpenSent</b>—BGP has sent an open message and is waiting to receive an open message from the peer.</li> </ul>
<b>Flags</b>	<p>Internal BGP flags:</p> <ul style="list-style-type: none"> <li>• <b>Aggregate Label</b>—BGP has aggregated a set of incoming labels (labels received from the peer) into a single forwarding label.</li> <li>• <b>CleanUp</b>—The peer session is being shut down.</li> <li>• <b>Delete</b>—This peer has been deleted.</li> <li>• <b>Idled</b>—This peer has been permanently idled.</li> <li>• <b>ImportEval</b>—At the last commit operation, this peer was identified as needing to reevaluate all received routes.</li> <li>• <b>Initializing</b>—The peer session is initializing.</li> <li>• <b>SendRtn</b>—Messages are being sent to the peer.</li> <li>• <b>Sync</b>—This peer is synchronized with the rest of the peer group.</li> <li>• <b>TryConnect</b>—Another attempt is being made to connect to the peer.</li> <li>• <b>Unconfigured</b>—This peer is not configured.</li> <li>• <b>WriteFailed</b>—An attempt to write to this peer failed.</li> </ul>



Table 206: show bgp neighbor Output Fields (*continued*)

Field Name	Field Description
<b>Last state</b>	<p>Previous state of the BGP session:</p> <ul style="list-style-type: none"> <li>• <b>Active</b>—BGP is initiating a transport protocol connection in an attempt to connect to a peer. If the connection is successful, BGP sends an Open message.</li> <li>• <b>Connect</b>—BGP is waiting for the transport protocol connection to be completed.</li> <li>• <b>Established</b>—The BGP session has been established, and the peers are exchanging update messages.</li> <li>• <b>Idle</b>—This is the first stage of a connection. BGP is waiting for a Start event.</li> <li>• <b>OpenConfirm</b>—BGP has acknowledged receipt of an open message from the peer and is waiting to receive a keepalive or notification message.</li> <li>• <b>OpenSent</b>—BGP has sent an open message and is waiting to receive an open message from the peer.</li> </ul>
<b>Last event</b>	<p>Last activity that occurred in the BGP session:</p> <ul style="list-style-type: none"> <li>• <b>Closed</b>—The BGP session closed.</li> <li>• <b>ConnectRetry</b>—The transport protocol connection failed, and BGP is trying again to connect.</li> <li>• <b>HoldTime</b>—The session ended because the hold timer expired.</li> <li>• <b>KeepAlive</b>—The local routing device sent a BGP keepalive message to the peer.</li> <li>• <b>Open</b>—The local routing device sent a BGP open message to the peer.</li> <li>• <b>OpenFail</b>—The local routing device did not receive an acknowledgment of a BGP open message from the peer.</li> <li>• <b>RecvKeepAlive</b>—The local routing device received a BGP keepalive message from the peer.</li> <li>• <b>RecvNotify</b>—The local routing device received a BGP notification message from the peer.</li> <li>• <b>RecvOpen</b>—The local routing device received a BGP open message from the peer.</li> <li>• <b>RecvUpdate</b>—The local routing device received a BGP update message from the peer.</li> <li>• <b>Start</b>—The peering session started.</li> <li>• <b>Stop</b>—The peering session stopped.</li> <li>• <b>TransportError</b>—A TCP error occurred.</li> </ul>
<b>Last error</b>	<p>Last error that occurred in the BGP session:</p> <ul style="list-style-type: none"> <li>• <b>Cease</b>—An error occurred, such as a version mismatch, that caused the session to close.</li> <li>• <b>Finite State Machine Error</b>—In setting up the session, BGP received a message that it did not understand.</li> <li>• <b>Hold Time Expired</b>—The session's hold time expired.</li> <li>• <b>Message Header Error</b>—The header of a BGP message was malformed.</li> <li>• <b>Open Message Error</b>—A BGP open message contained an error.</li> <li>• <b>None</b>—No errors occurred in the BGP session.</li> <li>• <b>Update Message Error</b>—A BGP update message contained an error.</li> </ul>
<b>Export</b>	Name of the export policy that is configured on the peer.
<b>Import</b>	Name of the import policy that is configured on the peer.



Table 206: show bgp neighbor Output Fields (*continued*)

Field Name	Field Description
<b>Options</b>	Configured BGP options: <ul style="list-style-type: none"> <li>• <b>AddressFamily</b>—Configured address family: <b>inet</b> or <b>inet-vpn</b>.</li> <li>• <b>AuthKeyChain</b>—Authentication key change is enabled.</li> <li>• <b>DropPathAttributes</b>—Certain path attributes are configured to be dropped from neighbor updates during inbound processing.</li> <li>• <b>GracefulRestart</b>—Graceful restart is configured.</li> <li>• <b>HoldTime</b>—Hold time configured with the <b>hold-time</b> statement. The hold time is three times the interval at which keepalive messages are sent.</li> <li>• <b>IgnorePathAttributes</b>—Certain path attributes are configured to be ignored in neighbor updates during inbound processing.</li> <li>• <b>Local Address</b>—Address configured with the <b>local-address</b> statement.</li> <li>• <b>Multihop</b>—Allow BGP connections to external peers that are not on a directly connected network.</li> <li>• <b>NLRI</b>—Configured MBGP state for the BGP group: <b>multicast</b>, <b>unicast</b>, or both if you have configured <b>nlri any</b>.</li> <li>• <b>Peer AS</b>—Configured peer autonomous system (AS).</li> <li>• <b>Preference</b>—Preference value configured with the <b>preference</b> statement.</li> <li>• <b>Refresh</b>—Configured to refresh automatically when the policy changes.</li> <li>• <b>Rib-group</b>—Configured routing table group.</li> </ul>
<b>Path-attributes dropped</b>	Path attribute codes that are dropped from neighbor updates.
<b>Path-attributes ignored</b>	Path attribute codes that are ignored during neighbor updates.
<b>Authentication key change</b>	(appears only if the <b>authentication-keychain</b> statement has been configured) Name of the authentication keychain enabled.
<b>Authentication algorithm</b>	(appears only if the <b>authentication-algorithm</b> statement has been configured) Type of authentication algorithm enabled: <b>hmac</b> or <b>md5</b> .
<b>Address families configured</b>	Names of configured address families for the VPN.
<b>Local Address</b>	Address of the local routing device.
<b>Remove-private options</b>	Options associated with the <b>remove-private</b> statement.
<b>Holdtime</b>	Hold time configured with the <b>hold-time</b> statement. The hold time is three times the interval at which keepalive messages are sent.
<b>Flags for NLRI inet-label-unicast</b>	Flags related to labeled-unicast: <ul style="list-style-type: none"> <li>• <b>TrafficStatistics</b>—Collection of statistics for labeled-unicast traffic is enabled.</li> </ul>



Table 206: show bgp neighbor Output Fields (*continued*)

Field Name	Field Description
<b>Traffic statistics</b>	Information about labeled-unicast traffic statistics: <ul style="list-style-type: none"> <li>• <b>Options</b>—Options configured for collecting statistics about labeled-unicast traffic.</li> <li>• <b>File</b>—Name and location of statistics log files.</li> <li>• <b>size</b>—Size of all the log files, in bytes.</li> <li>• <b>files</b>—Number of log files.</li> </ul>
<b>Traffic Statistics Interval</b>	Time between sample periods for labeled-unicast traffic statistics, in seconds.
<b>Preference</b>	Preference value configured with the <b>preference</b> statement.
<b>Outbound Timer</b>	Time for which the route is available in Junos OS routing table before it is exported to BGP. This field is displayed in the output only if the <b>out-delay</b> parameter is configured to a non-zero value.
<b>Number of flaps</b>	Number of times the BGP session has gone down and then come back up.
<b>Peer ID</b>	Router identifier of the peer.
<b>Group index</b>	Index number for the BGP peer group. The index number differentiates between groups when a single BGP group is split because of different configuration options at the group and peer levels.
<b>Peer index</b>	Index that is unique within the BGP group to which the peer belongs.
<b>Local ID</b>	Router identifier of the local routing device.
<b>Local Interface</b>	Name of the interface on the local routing device.
<b>Active holdtime</b>	Hold time that the local routing device negotiated with the peer.
<b>Keepalive Interval</b>	Keepalive interval, in seconds.
<b>BFD</b>	Status of BFD failure detection.
<b>Local Address</b>	Name of directly connected interface over which direct EBGP peering is established.
<b>NLRI for restart configured on peer</b>	Names of address families configured for restart.
<b>NLRI advertised by peer</b>	Address families supported by the peer: <b>unicast</b> or <b>multicast</b> .
<b>NLRI for this session</b>	Address families being used for this session.
<b>Peer supports Refresh capability</b>	Remote peer's ability to send and request full route table readvertisement (route refresh capability). For more information, see RFC 2918, <i>Route Refresh Capability for BGP-4</i> .
<b>Restart time configured on peer</b>	Configured time allowed for restart on the neighbor.



Table 206: show bgp neighbor Output Fields (*continued*)

Field Name	Field Description
Stale routes from peer are kept for	When graceful restart is negotiated, the maximum time allowed to hold routes from neighbors after the BGP session has gone down.
Peer does not support Restarter functionality	Graceful restart restarter-mode is disabled on the peer.
Peer does not support Receiver functionality	Graceful restart helper-mode is disabled on the peer.
Restart time requested by this peer	Restart time requested by this neighbor during capability negotiation.
Restart flag received from the peer	When this field appears, the BGP speaker has restarted (Restarting), and this peer should not wait for the <b>end-of-rib</b> marker from the speaker before advertising routing information to the speaker.
NLRI that peer supports restart for	Neighbor supports graceful restart for this address family.
NLRI peer can save forwarding state	Neighbor supporting this address family saves all forwarding states.
NLRI that peer saved forwarding for	Neighbor saves all forwarding states for this address family.
NLRI that restart is negotiated for	Router supports graceful restart for this address family.
NLRI of received end-of-rib markers	Address families for which end-of-routing-table markers are received from the neighbor.
NLRI of all end-of-rib markers sent	Address families for which end-of-routing-table markers are sent to the neighbor.
Peer supports 4 byte AS extension (peer-as 1)	Peer understands 4-byte AS numbers in BGP messages. The peer is running Junos OS Release 9.1 or later.
NLRIs for which peer can receive multiple paths	Appears in the command output of the local router if the downstream peer is configured to receive multiple BGP routes to a single destination, instead of only receiving the active route.  Possible value is <b>inet-unicast</b> .
NLRIs for which peer can send multiple paths: inet-unicast	Appears in the command output of the local router if the upstream peer is configured to send multiple BGP routes to a single destination, instead of only sending the active route.  Possible value is <b>inet-unicast</b> .



Table 206: show bgp neighbor Output Fields (*continued*)

Field Name	Field Description
Table inet.number	<p>Information about the routing table:</p> <ul style="list-style-type: none"> <li>• <b>RIB State</b>—BGP is in the graceful restart process for this routing table: <b>restart is complete</b> or <b>restart in progress</b>.</li> <li>• <b>Bit</b>—Number that represents the entry in the routing table for this peer.</li> <li>• <b>Send state</b>—State of the BGP group: <b>in sync</b>, <b>not in sync</b>, or <b>not advertising</b>.</li> <li>• <b>Active prefixes</b>—Number of prefixes received from the peer that are active in the routing table.</li> <li>• <b>Received prefixes</b>—Total number of prefixes from the peer, both active and inactive, that are in the routing table.</li> <li>• <b>Accepted prefixes</b>—Total number of prefixes from the peer that have been accepted by a routing policy.</li> <li>• <b>Suppressed due to damping</b>—Number of routes currently inactive because of damping or other reasons. These routes do not appear in the forwarding table and are not exported by routing protocols.</li> </ul>
Last traffic (seconds)	Last time any traffic was received from the peer or sent to the peer, and the last time the local routing device checked.
Input messages	Messages that BGP has received from the receive socket buffer, showing the total number of messages, number of update messages, number of times a policy is changed and refreshed, and the buffer size in octets. The buffer size is 16 KB.
Output messages	Messages that BGP has written to the transmit socket buffer, showing the total number of messages, number of update messages, number of times a policy is changed and refreshed, and the buffer size in octets. The buffer size is 16 KB.
Input dropped path attributes	<p>Information about dropped path attributes:</p> <ul style="list-style-type: none"> <li>• <b>Code</b>—Path attribute code.</li> <li>• <b>Count</b>—Path attribute count.</li> </ul>
Input ignored path attributes	<p>Information about ignored path attributes:</p> <ul style="list-style-type: none"> <li>• <b>Code</b>—Path attribute code.</li> <li>• <b>Count</b>—Path attribute count.</li> </ul>
Output queue	Number of BGP packets that are queued to be transmitted to a particular neighbor for a particular routing table. Output queue 0 is for unicast NLRIs, and queue 1 is for multicast NLRIs.
Trace options	Configured tracing of BGP protocol packets and operations.
Trace file	Name of the file to receive the output of the tracing operation.
Filter Updates recv	<p>(orf option only) Number of outbound-route filters received for each configured address family.</p> <p><b>NOTE:</b> The counter is cumulative. For example, the counter is increased after the remote peer either resends or clears the outbound route filtering prefix list.</p>



Table 206: show bgp neighbor Output Fields (*continued*)

Field Name	Field Description
<b>Immediate</b>	( <b>orf</b> option only) Number of route updates received with the immediate flag set. The immediate flag indicates that the BGP peer should readvertise the updated routes.  <b>NOTE:</b> The counter is cumulative. For example, the counter is increased after the remote peer either resends or clears the outbound route filtering prefix list.
<b>Filter</b>	( <b>orf</b> option only) Type of prefix filter received: <b>prefix-based</b> or <b>extended-community</b> .
<b>Received filter entries</b>	( <b>orf</b> option only) List of received filters displayed.
<b>seq</b>	( <b>orf</b> option only) Numerical order assigned to this prefix entry among all the received outbound route filter prefix entries.
<b>prefix</b>	( <b>orf</b> option only) Address for the prefix entry that matches the filter.
<b>minlength</b>	( <b>orf</b> option only) Minimum prefix length, in bits, required to match this prefix.
<b>maxlength</b>	( <b>orf</b> option only) Maximum prefix length, in bits, required to match this prefix.
<b>match</b>	( <b>orf</b> option only) For this prefix match, whether to <b>permit</b> or <b>deny</b> route updates.



## Sample Output

### show bgp neighbor

```

user@host > show bgp neighbor
Peer: 10.255.7.250+179 AS 10   Local: 10.255.7.248+63740 AS 10
  Type: Internal   State: Established   Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ redist_static ]
  Options: <Preference LocalAddress PeerAS Refresh>
  Local Address: 10.255.7.248 Holdtime: 90 Preference: 170 Outbound Timer: 50
  Number of flaps: 0
  Peer ID: 10.255.7.250   Local ID: 10.255.7.248   Active Holdtime: 90
  Keepalive Interval: 30   Group index: 0   Peer index: 0
  BFD: disabled, down
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 10)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:          1
    Received prefixes:        1
    Accepted prefixes:        1
    Suppressed due to damping: 0
    Advertised prefixes:      1
  Last traffic (seconds): Received 9   Sent 5   Checked 5
  Input messages: Total 36   Updates 2   Refreshes 0   Octets 718
  Output messages: Total 37   Updates 1   Refreshes 0   Octets 796
  Output Queue[0]: 0

Peer: 10.255.162.214+52193 AS 100 Local: 10.255.167.205+179 AS 100
  Type: Internal   State: Established (route reflector client)Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference LocalAddress Cluster AddressFamily Rib-group Refresh>
  Address families configured: inet-unicast inet-vpn-unicast route-target
  Local Address: 10.255.167.205 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.255.162.214   Local ID: 10.255.167.205   Active Holdtime: 90
  Keepalive Interval: 30   Group index: 0   Peer index: 1

```

### show bgp neighbor (CLNS)

```

user@host> show bgp neighbor
Peer: 10.245.245.1+179 AS 200 Local: 10.245.245.3+3770 AS 100
  Type: External   State: Established   Flags: <ImportEval Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Options: <Multihop Preference LocalAddress HoldTime AddressFamily PeerAS
  Rib-group Refresh>
  Address families configured: iso-vpn-unicast
  Local Address: 10.245.245.3 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.245.245.1   Local ID: 10.245.245.3   Active Holdtime: 90

```



```

Keepalive Interval: 30          Peer index: 0
NLRI advertised by peer: iso-vpn-unicast
NLRI for this session: iso-vpn-unicast
Peer supports Refresh capability (2)
Table bgp.isovpn.0 Bit: 10000
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete
  Send state: in sync
  Active prefixes:              3
  Received prefixes:            3
  Suppressed due to damping:    0
  Advertised prefixes:          3
Table aaaa.iso.0
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete
  Send state: not advertising
  Active prefixes:              3
  Received prefixes:            3
  Suppressed due to damping:    0
Last traffic (seconds): Received 6    Sent 5    Checked 5
Input messages: Total 1736    Updates 4    Refreshes 0    Octets 33385
Output messages: Total 1738    Updates 3    Refreshes 0    Octets 33305
Output Queue[0]: 0
Output Queue[1]: 0

```

#### show bgp neighbor (Layer 2 VPN)

```

user@host> show bgp neighbor
Peer: 10.69.103.2      AS 65100 Local: 10.69.103.1      AS 65103
Type: External        State: Active          Flags: <ImportEval>
Last State: Idle      Last Event: Start
Last Error: None
Export: [ BGP-INET-import ]
Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily PeerAS
Refresh>
Address families configured: inet-unicast
Local Address: 10.69.103.1 Holdtime: 90 Preference: 170
Number of flaps: 0
Peer: 10.69.104.2      AS 65100 Local: 10.69.104.1      AS 65104
Type: External        State: Active          Flags: <ImportEval>
Last State: Idle      Last Event: Start
Last Error: None
Export: [ BGP-L-import ]
Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily PeerAS
Refresh>
Address families configured: inet-labeled-unicast
Local Address: 10.69.104.1 Holdtime: 90 Preference: 170
Number of flaps: 0
Peer: 10.255.14.182+179 AS 69    Local: 10.255.14.176+2131 AS 69
Type: Internal        State: Established    Flags: <ImportEval>
Last State: OpenConfirm Last Event: RecvKeepAlive
Last Error: None
Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily
Rib-group Refresh>
Address families configured: inet-vpn-unicast l2vpn
Local Address: 10.255.14.176 Holdtime: 90 Preference: 170
Number of flaps: 0
Peer ID: 10.255.14.182    Local ID: 10.255.14.176    Active Holdtime: 90
Keepalive Interval: 30
NLRI for restart configured on peer: inet-vpn-unicast l2vpn
NLRI advertised by peer: inet-vpn-unicast l2vpn
NLRI for this session: inet-vpn-unicast l2vpn
Peer supports Refresh capability (2)

```



```
Restart time configured on the peer: 120
Stale routes from peer are kept for: 300
Restart time requested by this peer: 120
NLRI that peer supports restart for: inet-vpn-unicast 12vpn
NLRI peer can save forwarding state: inet-vpn-unicast 12vpn
NLRI that peer saved forwarding for: inet-vpn-unicast 12vpn
NLRI that restart is negotiated for: inet-vpn-unicast 12vpn
NLRI of received end-of-rib markers: inet-vpn-unicast 12vpn
Table bgp.13vpn.0 Bit: 10000
  RIB State: BGP restart in progress
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          10
  Received prefixes:        10
  Suppressed due to damping: 0
Table bgp.12vpn.0 Bit: 20000
  RIB State: BGP restart in progress
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          1
  Received prefixes:        1
  Suppressed due to damping: 0
Table BGP-INET.inet.0 Bit: 30000
  RIB State: BGP restart in progress
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          2
  Received prefixes:        2
  Suppressed due to damping: 0
Table BGP-L.inet.0 Bit: 40000
  RIB State: BGP restart in progress
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          2
  Received prefixes:        2
  Suppressed due to damping: 0
Table LDP.inet.0 Bit: 50000
  RIB State: BGP restart is complete
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          1
  Received prefixes:        1
  Suppressed due to damping: 0
Table OSPF.inet.0 Bit: 60000
  RIB State: BGP restart is complete
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          2
  Received prefixes:        2
  Suppressed due to damping: 0
Table RIP.inet.0 Bit: 70000
  RIB State: BGP restart is complete
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          2
  Received prefixes:        2
  Suppressed due to damping: 0
Table STATIC.inet.0 Bit: 80000
  RIB State: BGP restart is complete
  RIB State: VPN restart in progress
  Send state: in sync
```



```

Active prefixes:          1
Received prefixes:        1
Suppressed due to damping: 0
Table L2VPN.12vpn.0 Bit: 90000
RIB State: BGP restart is complete
RIB State: VPN restart in progress
Send state: in sync
Active prefixes:          1
Received prefixes:        1
Suppressed due to damping: 0
Last traffic (seconds): Received 0    Sent 0    Checked 0
Input messages: Total 14    Updates 13    Refreshes 0    Octets 1053
Output messages: Total 3    Updates 0    Refreshes 0    Octets 105
Output Queue[0]: 0
Output Queue[1]: 0
Output Queue[2]: 0
Output Queue[3]: 0
Output Queue[4]: 0
Output Queue[5]: 0
Output Queue[6]: 0
Output Queue[7]: 0
Output Queue[8]: 0

```

#### show bgp neighbor (Layer 3 VPN)

```

user@host> show bgp neighbor
Peer: 4.4.4.4+179    AS 10045 Local: 5.5.5.5+1214    AS 10045
Type: Internal    State: Established    Flags: <ImportEval>
Last State: OpenConfirm    Last Event: RecvKeepAlive
Last Error: None
Export: [ match-all ] Import: [ match-all ]
Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily
Rib-group Refresh>
Address families configured: inet-vpn-unicast
Local Address: 5.5.5.5 Holdtime: 90 Preference: 170
Flags for NLRI inet-labeled-unicast: TrafficStatistics
Traffic Statistics: Options: all File: /var/log/bstat.log
                                size 131072 files 10

Traffic Statistics Interval: 60
Number of flaps: 0
Peer ID: 192.168.1.110    Local ID: 192.168.1.111    Active Holdtime: 90
Keepalive Interval: 30
NLRI for restart configured on peer: inet-vpn-unicast
NLRI advertised by peer: inet-vpn-unicast
NLRI for this session: inet-vpn-unicast
Peer supports Refresh capability (2)
Restart time configured on the peer: 120
Stale routes from peer are kept for: 300
Restart time requested by this peer: 120
NLRI that peer supports restart for: inet-vpn-unicast
NLRI peer can save forwarding state: inet-vpn-unicast
NLRI that peer saved forwarding for: inet-vpn-unicast
NLRI that restart is negotiated for: inet-vpn-unicast
NLRI of received end-of-rib markers: inet-vpn-unicast
NLRI of all end-of-rib markers sent: inet-vpn-unicast
Table bgp.13vpn.0 Bit: 10000
RIB State: BGP restart is complete
RIB State: VPN restart is complete
Send state: in sync
Active prefixes:          2
Received prefixes:        2
Suppressed due to damping: 0
Table vpn-green.inet.0 Bit: 20001

```



```

RIB State: BGP restart is complete
RIB State: VPN restart is complete
Send state: in sync
Active prefixes:          2
Received prefixes:        2
Suppressed due to damping: 0
Last traffic (seconds): Received 15   Sent 20   Checked 20
Input messages:  Total 40   Updates 2   Refreshes 0   Octets 856
Output messages: Total 44   Updates 2   Refreshes 0   Octets 1066
Output Queue[0]: 0
Output Queue[1]: 0
Trace options: detail packets
Trace file: /var/log/bgpr.log size 131072 files 10

```

### show bgp neighbor neighbor-address

```

user@host> show bgp neighbor 192.168.1.111
Peer: 10.255.245.12+179 AS 35 Local: 10.255.245.13+2884 AS 35
Type: Internal State: Established (route reflector client)Flags: <Sync>
Last State: OpenConfirm Last Event: RecvKeepAlive
Last Error: None
Options: <Preference LocalAddress HoldTime Cluster AddressFamily Rib-group
Refresh>
Address families configured: inet-vpn-unicast inet-labeled-unicast
Local Address: 10.255.245.13 Holdtime: 90 Preference: 170
Flags for NLRI inet-vpn-unicast: AggregateLabel
Flags for NLRI inet-labeled-unicast: AggregateLabel
Number of flaps: 0
Peer ID: 10.255.245.12 Local ID: 10.255.245.13 Active Holdtime: 90
Keepalive Interval: 30
BFD: disabled
NLRI advertised by peer: inet-vpn-unicast inet-labeled-unicast
NLRI for this session: inet-vpn-unicast inet-labeled-unicast
Peer supports Refresh capability (2)
Restart time configured on the peer: 300
Stale routes from peer are kept for: 60
Restart time requested by this peer: 300
NLRI that peer supports restart for: inet-unicast inet6-unicast
NLRI that restart is negotiated for: inet-unicast inet6-unicast
NLRI of received end-of-rib markers: inet-unicast inet6-unicast
NLRI of all end-of-rib markers sent: inet-unicast inet6-unicast
Table inet.0 Bit: 10000
RIB State: restart is complete
Send state: in sync
Active prefixes: 4
Received prefixes: 6
Suppressed due to damping: 0
Table inet6.0 Bit: 20000
RIB State: restart is complete
Send state: in sync
Active prefixes: 0
Received prefixes: 2
Suppressed due to damping: 0
Last traffic (seconds): Received 3 Sent 3 Checked 3
Input messages:  Total 9 Updates 6 Refreshes 0 Octets 403
Output messages: Total 7 Updates 3 Refreshes 0 Octets 365
Output Queue[0]: 0
Output Queue[1]: 0
Trace options: detail packets
Trace file: /var/log/bgpr size 131072 files 10

user@host> show bgp neighbor 192.168.4.222

```



# show bgp neighbor neighbor-address

```

Peer: 192.168.4.222+4902 AS 65501 Local: 192.168.4.221+179 AS 65500
Type: External      State: Established      Flags: <Sync>
Last State: OpenConfirm  Last Event: RecvKeepAlive
Last Error: Cease
Export: [ export-policy ] Import: [ import-policy ]
Options: <Preference HoldTime AddressFamily PeerAS PrefixLimit Refresh>
Address families configured: inet-unicast inet-multicast
Holdtime: 60000 Preference: 170
Number of flaps: 4
Last flap event: RecvUpdate
Error: 'Cease' Sent: 5 Recv: 0
Peer ID: 10.255.245.6      Local ID: 10.255.245.5      Active Holdtime: 60000
Keepalive Interval: 20000      Peer index: 0
BFD: disabled, down
Local Interface: fxp0.0
NLRI advertised by peer: inet-unicast inet-multicast
NLRI for this session: inet-unicast inet-multicast
Peer supports Refresh capability (2)
Table inet.0 Bit: 10000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:          8
  Received prefixes:        10
  Accepted prefixes:        10
  Suppressed due to damping: 0
  Advertised prefixes:      3
Table inet.2 Bit: 20000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:          0
  Received prefixes:        0
  Accepted prefixes:        0
  Suppressed due to damping: 0
  Advertised prefixes:      0
Last traffic (seconds): Received 357 Sent 357 Checked 357
Input messages: Total 4 Updates 2 Refreshes 0 Octets 211
Output messages: Total 4 Updates 1 Refreshes 0 Octets 147
Output Queue[0]: 0
Output Queue[1]: 0
Trace options: all
Trace file: /var/log/bgp size 10485760 files 10

```

# show bgp neighbor orf neighbor-address detail

```

user@host > show bgp neighbor orf 192.168.165.56 detail
Peer: 192.168.165.56+179 Type: External
Group: ext1

inet-unicast
  Filter updates rcv:          1 Immediate:          1
  Filter: prefix-based receive
  Received filter entries:
    seq 1: prefix 2.2.2.2/32: minlen 32: maxlen 32: match deny:

inet6-unicast
  Filter updates rcv:          0 Immediate:          1
  Filter: prefix-based receive
  Received filter entries:
    *.*

```



## show bgp summary

<b>Syntax</b>	<pre>show bgp summary &lt;exact-instance <i>instance-name</i>&gt; &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>
<b>Syntax (EX Series Switch and QFX Series)</b>	<pre>show bgp summary &lt;exact-instance <i>instance-name</i>&gt; &lt;instance <i>instance-name</i>&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p> <p><b>exact-instance</b> option introduced in Junos OS Release 11.4.</p>
<b>Description</b>	Display BGP summary information.
<b>Options</b>	<p><b>none</b>—Display BGP summary information for all routing instances.</p> <p><b>exact-instance <i>instance-name</i></b>—(Optional) Display information for the specified instance only.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display information for all routing instances whose name begins with this string (for example, <b>cust1</b>, <b>cust11</b>, and <b>cust111</b> are all displayed when you run the <b>show bgp summary instance cust1</b> command). The instance name can be master for the main instance, or any valid configured instance name or its prefix.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<p><a href="#">show bgp summary (When a Peer Is Not Established) on page 3101</a></p> <p><a href="#">show bgp summary (When a Peer Is Established) on page 3101</a></p> <p><a href="#">show bgp summary (CLNS) on page 3101</a></p> <p><a href="#">show bgp summary (Layer 2 VPN) on page 3101</a></p> <p><a href="#">show bgp summary (Layer 3 VPN) on page 3102</a></p>
<b>Output Fields</b>	<p><a href="#">Table 207 on page 3098</a> describes the output fields for the <b>show bgp summary</b> command. Output fields are listed in the approximate order in which they appear.</p>

Table 207: show bgp summary Output Fields

Field Name	Field Description
Groups	Number of BGP groups.
Peers	Number of BGP peers.



Table 207: show bgp summary Output Fields (*continued*)

Field Name	Field Description
<b>Down peers</b>	Number of down BGP peers.
<b>Table</b>	Name of routing table.
<b>Tot Paths</b>	Total number of paths.
<b>Act Paths</b>	Number of active routes.
<b>Suppressed</b>	Number of routes currently inactive because of damping or other reasons. These routes do not appear in the forwarding table and are not exported by routing protocols.
<b>History</b>	Number of withdrawn routes stored locally to keep track of damping history.
<b>Damp State</b>	Number of routes with a figure of merit greater than zero, but still active because the value has not reached the threshold at which suppression occurs.
<b>Pending</b>	Routes in process by BGP import policy.
<b>Peer</b>	Address of each BGP peer. Each peer has one line of output.
<b>AS</b>	Peer's AS number.
<b>InPkt</b>	Number of packets received from the peer.
<b>OutPkt</b>	Number of packets sent to the peer.
<b>OutQ</b>	Number of BGP packets that are queued to be transmitted to a particular neighbor. It normally is 0 because the queue usually is emptied quickly.
<b>Flaps</b>	Number of times the BGP session has gone down and then come back up.
<b>Last Up/Down</b>	Last time since the neighbor transitioned to or from the established state.



Table 207: show bgp summary Output Fields (*continued*)

Field Name	Field Description
<b>State #Active /Received/Accepted /Damped</b>	<p>Multipurpose field that displays information about BGP peer sessions. The field's contents depend upon whether a session is established and whether it was established on the main routing device or in a routing instance.</p> <ul style="list-style-type: none"> <li>If a peer is not established, the field shows the state of the peer session: <b>Active</b>, <b>Connect</b>, or <b>Idle</b>. In general, the Idle state is the first stage of a connection. BGP is waiting for a Start event. A session can be idle for other reasons as well. The reason that a session is idle is sometimes displayed. For example: <b>Idle (Removal in progress)</b> or <b>Idle (LicenseFailure)</b>.</li> <li>If a BGP session is established on the main routing device, the field shows the number of active, received, accepted, and damped routes that are received from a neighbor and appear in the <b>inet.0</b> (main) and <b>inet.2</b> (multicast) routing tables. For example, <b>8/10/10/2</b> and <b>2/4/4/0</b> indicate the following: <ul style="list-style-type: none"> <li>8 active routes, 10 received routes, 10 accepted routes, and 2 damped routes from a BGP peer appear in the <b>inet.0</b> routing table.</li> <li>2 active routes, 4 received routes, 4 accepted routes, and no damped routes from a BGP peer appear in the <b>inet.2</b> routing table.</li> </ul> </li> <li>If a BGP session is established in a routing instance, the field indicates the established (<b>Establ</b>) state, identifies the specific routing table that receives BGP updates, and shows the number of active, received, and damped routes that are received from a neighbor. For example, <b>Establ VPN-AB.inet.0: 2/4/0</b> indicates the following: <ul style="list-style-type: none"> <li>The BGP session is established.</li> <li>Routes are received in the <b>VPN-AB.inet.0</b> routing table.</li> <li>The local routing device has two active routes, four received routes, and no damped routes from a BGP peer.</li> </ul> </li> </ul> <p>When a BGP session is established, the peers are exchanging update messages.</p>



## Sample Output

### show bgp summary (When a Peer Is Not Established)

```
user@host> show bgp summary
Groups: 2 Peers: 4 Down peers: 1
Table          Tot Paths  Act Paths Suppressed  History  Damp State   Pending
inet.0          6          4          0          0          0          0
Peer           AS      InPkt    OutPkt    OutQ    Flaps Last Up/Dwn
State|#Active/Received/Damped...
10.0.0.3        65002      86       90       0        2    42:54 0/0/0

0/0/0
10.0.0.4        65002      90       91       0        1    42:54 0/2/0

0/0/0
10.0.0.6        65002      87       90       0        3          3 Active
10.1.12.1       65001      89       89       0        1    42:54 4/4/0

0/0/0
```

### show bgp summary (When a Peer Is Established)

```
user@host> show bgp summary
Groups: 1 Peers: 3 Down peers: 0
Table          Tot Paths  Act Paths Suppressed  History  Damp State   Pending
inet.0          6          4          0          0          0          0
Peer           AS      InPkt    OutPkt    OutQ    Flaps Last Up/Dwn
State|#Active/Received/Damped...
10.0.0.2        65002    88675    88652     0        2    42:38 2/4/0

0/0/0
10.0.0.3        65002    54528    54532     0        1   2w4d22h 0/0/0

0/0/0
10.0.0.4        65002    51597    51584     0        0   2w3d22h 2/2/0

0/0/0
```

### show bgp summary (CLNS)

```
user@host> show bgp summary
Groups: 1 Peers: 1 Down peers: 0
Peer           AS      InPkt    OutPkt    OutQ    Flaps Last Up/Dwn
State|#Active/Received/Damped...
10.245.245.1    200     1735     1737     0        0   14:26:12 Establ
  bgp.isovpn.0: 3/3/0
  aaaa.iso.0: 3/3/0
```

### show bgp summary (Layer 2 VPN)

```
user@host> show bgp summary
Groups: 1 Peers: 5 Down peers: 0
Table          Tot Paths  Act Paths Suppressed  History  Damp State   Pending
bgp.l2vpn.0      1          1          0          0          0          0
inet.0           0          0          0          0          0          0
Peer           AS      InPkt    OutPkt    OutQ    Flaps Last Up/Dwn
State|#Active/Received/Damped...
10.255.245.35   65299      72       74       0        1    19:00 Establ
  bgp.l2vpn.0: 1/1/0
  frame-vpn.l2vpn.0: 1/1/0
10.255.245.36   65299    2164    2423     0        4    19:50 Establ
  bgp.l2vpn.0: 0/0/0
  frame-vpn.l2vpn.0: 0/0/0
10.255.245.37   65299      36       37       0        4    17:07 Establ
```



```

inet.0: 0/0/0
10.255.245.39 65299 138 168 0 6 53:48 Estab1
bgp.12vpn.0: 0/0/0
frame-vpn.12vpn.0: 0/0/0
10.255.245.69 65299 134 140 0 6 53:42 Estab1
inet.0: 0/0/0

```

### show bgp summary (Layer 3 VPN)

```

user@host> show bgp summary
Groups: 2 Peers: 2 Down peers: 0
Table Tot Paths Act Paths Suppressed History Damp State Pending
bgp.13vpn.0 2 2 0 0 0 0
Peer AS InPkt OutPkt OutQ Flaps Last Up/Dwn
State|#Active/Received/Damped...
10.39.1.5 2 21 22 0 0 6:26 Estab1
VPN-AB.inet.0: 1/1/0
10.255.71.15 1 19 21 0 0 6:17 Estab1
bgp.13vpn.0: 2/2/0
VPN-A.inet.0: 1/1/0
VPN-AB.inet.0: 2/2/0
VPN-B.inet.0: 1/1/0

```



## show policy damping

<b>Syntax</b>	show policy damping <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switch and QFX Series)</b>	show policy damping
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Display information about BGP route flap damping parameters.
<b>Options</b>	<p><b>none</b>—Display information about BGP route flap damping parameters.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Additional Information</b>	In the output from this command, figure-of-merit values correlate with the probability of future instability of a routing device. Routes with higher figure-of-merit values are suppressed for longer periods of time. The figure-of-merit value decays exponentially over time. A figure-of-merit value of zero is assigned to each new route. The value is increased each time the route is withdrawn or readvertised, or when one of its path attributes changes.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• “Configuring BGP Flap Damping Parameters” in the Routing Policy Configuration Guide</li> <li>• <a href="#">clear bgp damping on page 3072</a></li> <li>• <a href="#">show route damping on page 2488</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show policy damping on page 3104</a>
<b>Output Fields</b>	<a href="#">Table 208 on page 3103</a> describes the output fields for the <b>show policy damping</b> command. Output fields are listed in the approximate order in which they appear.

**Table 208: show policy damping Output Fields**

Field Name	Field Description
<b>Half-life</b>	Decay half-life, in minutes. The value represents the period during which the accumulated figure-of-merit value is reduced by half if the route remains stable. If a route has flapped, but then becomes stable, the figure-of-merit value for the route decays exponentially. For example, for a route with a figure-of-merit value of 1500, if no incidents occur, its figure-of-merit value is reduced to 750 after 15 minutes and to 375 after another 15 minutes.



Table 208: show policy damping Output Fields (*continued*)

Field Name	Field Description
<b>Reuse merit</b>	Figure-of-merit value below which a suppressed route can be used again. A suppressed route becomes reusable when its figure-of-merit value decays to a value below a reuse threshold, and the route once again is considered usable and can be installed in the forwarding table and exported from the routing table.
<b>Suppress/cutoff merit</b>	Figure-of-merit value above which a route is suppressed for use or inclusion in advertisements. When a route's figure-of-merit value reaches a particular level, called the cutoff or suppression threshold, the route is suppressed. When a route is suppressed, the routing table no longer installs the route into the forwarding table and no longer exports this route to any of the routing protocols.
<b>Maximum suppress time</b>	Maximum hold-down time, in minutes. The value represents the maximum time that a route can be suppressed no matter how unstable it has been before this period of stability.
<b>Computed values</b>	<ul style="list-style-type: none"> <li>• <b>Merit ceiling</b>—Maximum merit that a flapping route can collect.</li> <li>• <b>Maximum decay</b>—Maximum decay half-life, in minutes.</li> </ul>

## Sample Output

```

show policy damping      user@host> show policy damping
                          Default damping information:
                          Halflife: 15 minutes
                          Reuse merit: 750 Suppress/cutoff merit: 3000
                          Maximum suppress time: 60 minutes
                          Computed values:
                          Merit ceiling: 12110
                          Maximum decay: 6193
                          Damping information for "standard-damping":
                          Halflife: 10 minutes
                          Reuse merit: 4000 Suppress/cutoff merit: 8000
                          Maximum suppress time: 30 minutes
                          Computed values:
                          Merit ceiling: 32120
                          Maximum decay: 12453

```



## show route damping

<b>Syntax</b>	show route damping (decayed   history   suppressed) <brief   detail   extensive   terse> <logical-system (all   <i>logical-system-name</i> )>	
<b>Syntax (EX Series Switch and QFX Series)</b>	show route damping (decayed   history   suppressed) <brief   detail   extensive   terse>	
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.3 for the QFX Series.	
<b>Description</b>	Display the BGP routes for which updates might have been reduced because of route flap damping.	
<b>Options</b>	<b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.  <b>decayed</b> —Display route damping entries that might no longer be valid, but are not suppressed.  <b>history</b> —Display entries that have already been withdrawn, but have been logged.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.  <b>suppressed</b> —Display entries that have been suppressed and are no longer being installed into the forwarding table or exported by routing protocols.	
<b>Required Privilege Level</b>	view	
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">clear bgp damping on page 3072</a></li> <li>• <a href="#">show policy damping on page 3103</a></li> </ul>	
<b>List of Sample Output</b>	<a href="#">show route damping decayed detail on page 3109</a> <a href="#">show route damping history on page 3109</a> <a href="#">show route damping history detail on page 3109</a>	
<b>Output Fields</b>	Table 187 on page 2488 lists the output fields for the <b>show route damping</b> command. Output fields are listed in the approximate order in which they appear.	

Table 209: show route damping Output Fields

Field Name	Field Description	Level of Output
<i>routing-table-name</i>	Name of the routing table—for example, <i>inet.0</i> .	All levels
<i>destinations</i>	Number of destinations for which there are routes in the routing table.	All levels



Table 209: show route damping Output Fields (*continued*)

Field Name	Field Description	Level of Output
<i>number routes</i>	Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> <li>• <b>active</b></li> <li>• <b>holddown</b> (routes that are in a pending state before being declared inactive)</li> <li>• <b>hidden</b> (the routes are not used because of a routing policy)</li> </ul>	All levels
<i>destination-prefix (entry, announced)</i>	Destination prefix. The <b>entry</b> value is the number of routes for this destination, and the <b>announced</b> value is the number of routes being announced for this destination.	<b>detail extensive</b>
<i>[protocol, preference]</i>	Protocol from which the route was learned and the preference value for the route. <ul style="list-style-type: none"> <li>• <b>+</b>—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>-</b>—A hyphen indicates the last active route.</li> <li>• <b>*</b>—An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul> <p>In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value.</p>	All levels
<b>Next-hop reference count</b>	Number of references made to the next hop.	<b>detail extensive</b>
<b>Source</b>	IP address of the route source.	<b>detail extensive</b>
<b>Next hop</b>	Network layer address of the directly reachable neighboring system.	<b>detail extensive</b>
<b>via</b>	Interface used to reach the next hop. If there is more than one interface available to the next hop, the interface that is actually used is followed by the word <b>Selected</b> .	<b>detail extensive</b>
<b>Protocol next hop</b>	Network layer address of the remote routing device that advertised the prefix. This address is used to derive a forwarding next hop.	<b>detail extensive</b>
<b>Indirect next hop</b>	Index designation used to specify the mapping between protocol next hops, tags, kernel export policy, and the forwarding next hops.	<b>detail extensive</b>
<b>State</b>	Flags for this route. For a description of possible values for this field, see the output field table for the <a href="#">show route detail</a> command.	<b>detail extensive</b>
<b>Local AS</b>	AS number of the local routing device.	<b>detail extensive</b>
<b>Peer AS</b>	AS number of the peer routing device.	<b>detail extensive</b>



Table 209: show route damping Output Fields (*continued*)

Field Name	Field Description	Level of Output
Age	How long the route has been known.	detail extensive
Metric	Metric for the route.	detail extensive
Task	Name of the protocol that has added the route.	detail extensive
Announcement bits	List of protocols that announce this route. <b>n-Resolve inet</b> indicates that the route is used for route resolution for next hops found in the routing table. <b>n</b> is an index used by Juniper Networks customer support only.	detail extensive
AS path	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• I—IGP.</li> <li>• E—EGP.</li> <li>• ?—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li>• [ ]—Brackets enclose the local AS number associated with the AS path if more than one AS number is configured on the routing device or if AS path prepending is configured.</li> <li>• { }—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li>• ( )—Parentheses enclose a confederation.</li> <li>• ( [ ] )—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>	All levels
to	Next hop to the destination. An angle bracket (>) indicates that the route is the selected route.	brief none
via	Interface used to reach the next hop. If there is more than one interface available to the next hop, the interface that is actually used is followed by the word <b>Selected</b> .	brief none
Communities	Community path attribute for the route. See the output field table for the <a href="#">show route detail</a> command.	detail extensive
Localpref	Local preference value included in the route.	All levels
Router ID	BGP router ID as advertised by the neighbor in the open message.	detail extensive
Merit (last update/now)	Last updated and current figure-of-merit value.	detail extensive



Table 209: show route damping Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>damping-parameters</b>	Name that identifies the damping parameters used, which is defined in the damping statement at the <b>[edit policy-options]</b> hierarchy level.	<b>detail extensive</b>
<b>Last update</b>	Time of most recent change in path attributes.	<b>detail extensive</b>
<b>First update</b>	Time of first change in path attributes, which started the route damping process.	<b>detail extensive</b>
<b>Flaps</b>	Number of times the route has gone up or down or its path attributes have changed.	<b>detail extensive</b>
<b>Suppressed</b>	( <b>suppressed</b> keyword only) This route is currently suppressed. A suppressed route does not appear in the forwarding table and routing protocols do not export it.	All levels
<b>Reusable in</b>	( <b>suppressed</b> keyword only) Time when a suppressed route will again be available.	All levels
<b>Preference will be</b>	( <b>suppressed</b> keyword only) Preference value that will be applied to the route when it is again active.	All levels



## Sample Output

### show route damping decayed detail

```

user@host> show route damping decayed detail
inet.0: 173319 destinations, 1533668 routes (172625 active, 4 holddown, 108083
hidden)
10.0.111.0/24 (7 entries, 1 announced)
  *BGP      Preference: 170/-101
            Next-hop reference count: 151973
            Source: 172.23.2.129
            Next hop: via so-1/2/0.0
            Next hop: via so-5/1/0.0, selected
            Next hop: via so-6/0/0.0
            Protocol next hop: 172.23.2.129
            Indirect next hop: 89a1a00 264185
            State: <Active Ext>
            Local AS: 65000 Peer AS: 65490
            Age: 3:28      Metric2: 0
            Task: BGP_65490.172.23.2.129+179
            Announcement bits (6): 0-KRT 1-RT 4-KRT 5-BGP.0.0.0.0+179

        6-Resolve tree 2 7-Resolve tree 3
        AS path: 65490 65520 65525 65525 65525 65525 I ()
        Communities: 65501:390 65501:2000 65501:3000 65504:701
        Localpref: 100
        Router ID: 172.23.2.129
        Merit (last update/now): 1934/1790
        damping-parameters: damping-high
        Last update:      00:03:28 First update:      00:06:40
        Flaps: 2

```

### show route damping history

```

user@host> show route damping history
inet.0: 173320 destinations, 1533529 routes (172624 active, 6 holddown, 108122
hidden)
+ = Active Route, - = Last Active, * = Both

10.108.0.0/15      [BGP ] 2d 22:47:58, localpref 100
                   AS path: 65220 65501 65502 I
                   > to 192.168.60.85 via so-3/1/0.0

```

### show route damping history detail

```

user@host> show route damping history detail
inet.0: 173319 destinations, 1533435 routes (172627 active, 2 holddown, 108105
hidden)
10.108.0.0/15 (3 entries, 1 announced)
  BGP      /-101
            Next-hop reference count: 69058
            Source: 192.168.60.85
            Next hop: 192.168.60.85 via so-3/1/0.0, selected
            State: <Hidden Ext>
            Inactive reason: Unusable path
            Local AS: 65000 Peer AS: 65220
            Age: 2d 22:48:10
            Task: BGP_65220.192.168.60.85+179
            AS path: 65220 65501 65502 I ()
            Communities: 65501:390 65501:2000 65501:3000 65504:3561
            Localpref: 100
            Router ID: 192.168.80.25
            Merit (last update/now): 1000/932
            damping-parameters: set-normal

```



Last update: 00:01:05 First update: 00:01:05  
Flaps: 1



## PART 11

# Intermediate System to Intermediate System

- [Overview on page 3113](#)
- [Configuration on page 3121](#)
- [Administration on page 3241](#)







## CHAPTER 34

# Overview

- [IS-IS Overview on page 3113](#)

## IS-IS Overview

---

- [IS-IS Overview on page 3113](#)
- [Understanding BFD Authentication for IS-IS on page 3118](#)
- [Understanding Hitless Authentication Key Rollover for IS-IS on page 3119](#)

## IS-IS Overview

The IS-IS protocol is an interior gateway protocol (IGP) that uses link-state information to make routing decisions.

IS-IS is a link-state IGP that uses the shortest-path-first (SPF) algorithm to determine routes. IS-IS evaluates the topology changes and determines whether to perform a full SPF recalculation or a partial route calculation (PRC). This protocol originally was developed for routing International Organization for Standardization (ISO) Connectionless Network Protocol (CLNP) packets.

Like OSPF routing, IS-IS uses hello packets that allow network convergence to occur quickly when network changes are detected. IS-IS uses the SPF algorithm to determine routes. Using SPF, IS-IS evaluates network topology changes and determines if a full or partial route calculation is required.



**NOTE:** Because IS-IS uses ISO addresses, the configuration of IP version 6 (IPv6) and IP version 4 (IPv4) implementations of IS-IS is identical.

This section discusses the following topics:

- [IS-IS Terminology on page 3114](#)
- [ISO Network Addresses on page 3114](#)
- [IS-IS Packets on page 3116](#)
- [Persistent Route Reachability on page 3117](#)



- [IS-IS Support for Multipoint Network Clouds on page 3117](#)
- [Installing a Default Route to the Nearest Routing Device That Operates at Both IS-IS Levels on page 3117](#)

---

## IS-IS Terminology

An IS-IS network is a single autonomous system (AS), also called a *routing domain*, that consists of *end systems* and *intermediate systems*. End systems are network entities that send and receive packets. Intermediate systems send and receive packets and relay (forward) packets. (Intermediate system is the Open System Interconnection [OSI] term for a router.) ISO packets are called network PDUs.

In IS-IS, a single AS can be divided into smaller groups called *areas*. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring *Level 1* and *Level 2* intermediate systems. Level 1 systems route within an area; when the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs. No IS-IS area functions strictly as a backbone.

Level 1 routers share intra-area routing information, and Level 2 routers share interarea information about IP addresses available within each area. Uniquely, IS-IS routers can act as both Level 1 and Level 2 routers, sharing intra-area routes with other Level 1 routers and interarea routes with other Level 2 routers.

The propagation of link-state updates is determined by the level boundaries. All routers within a level maintain a complete link-state database of all other routers in the same level. Each router then uses the Dijkstra algorithm to determine the shortest path from the local router to other routers in the link-state database.

---

## ISO Network Addresses

IS-IS uses ISO network addresses. Each address identifies a point of connection to the network, such as a router interface, and is called a *network service access point (NSAP)*.

IS-IS supports multiple NSAP addresses on the loopback lo0 interface.

An end system can have multiple NSAP addresses, in which case the addresses differ only by the last byte (called the *n-selector*). Each NSAP represents a service that is available at that node. In addition to having multiple services, a single node can belong to multiple areas.

Each network entity also has a special network address called a *network entity title (NET)*. Structurally, an NET is identical to an NSAP address but has an n-selector of 00. Most end systems and intermediate systems have one NET. Intermediate systems that participate in multiple areas can have multiple NETs.

The following ISO addresses illustrate the IS-IS address format:

```
49.0001.00a0.c96b.c490.00
49.0001.2081.9716.9018.00
```

NETs take several forms, depending on your network requirements. NET addresses are hexadecimal and range from 8 octets to 20 octets in length. Generally, the format consists



of an authority and format Identifier (AFI), a domain ID, an area ID, a system identifier, and a selector. The simplest format omits the domain ID and is 10 octets long. For example, the NET address 49.0001.1921.6800.1001.00 consists of the following parts:

- 49—AFI
- 0001—Area ID
- 1921.6800.1001—System identifier
- 00—Selector

The system identifier must be unique within the network. For an IP-only network, we recommend using the IP address of an interface on the router. Configuring a loopback NET address with the IP address is helpful when troubleshooting is required on the network.

The first portion of the address is the area number, which is a variable number from 1 through 13 bytes. The first byte of the area number (49) is the authority and format indicator (AFI). The next bytes are the assigned domain (area) identifier, which can be from 0 through 12 bytes. In the examples above, the area identifier is 0001.

The next six bytes form the system identifier. The system identifier can be any six bytes that are unique throughout the entire domain. The system identifier commonly is the media access control (MAC) address (as in the first example, 00a0.c96b.c490) or the IP address expressed in binary-coded decimal (BCD) (as in the second example, 2081.9716.9018, which corresponds to IP address 208.197.169.18). The last byte (00) is the n-selector.



**NOTE:** The system identifier cannot be 0000.0000.0000. All 0s is an illegal setting, and the adjacency is not formed with this setting.

To provide help with IS-IS debugging, the Junos<sup>®</sup> operating system (Junos OS) supports dynamic mapping of ISO system identifiers to the hostname. Each system can be configured with a hostname, which allows the system identifier-to-hostname mapping to be carried in a dynamic hostname type, length, and value (TLV) tuple in IS-IS link-state PDUs. This enables intermediate systems in the routing domain to learn about the ISO system identifier of a particular intermediate system.



## IS-IS Packets

---

Each IS-IS PDU shares a common header. IS-IS uses the following PDUs to exchange protocol information:

- IS-IS hello (IIH) PDUs—Broadcast to discover the identity of neighboring IS-IS systems and to determine whether the neighbors are Level 1 or Level 2 intermediate systems.

IS-IS hello PDUs establish adjacencies with other routers and have three different formats: one for point-to-point hello packets, one for Level 1 broadcast links, and one for Level 2 broadcast links. Level 1 routers must share the same area address to form an adjacency, while Level 2 routers do not have this limitation. The request for adjacency is encoded in the Circuit type field of the PDU.

Hello PDUs have a preset length assigned to them. The IS-IS router does not resize any PDU to match the maximum transmission unit (MTU) on a router interface. Each interface supports the maximum IS-IS PDU of 1492 bytes, and hello PDUs are padded to meet the maximum value. When the hello is sent to a neighboring router, the connecting interface supports the maximum PDU size.

- Link-state PDUs—Contain information about the state of adjacencies to neighboring IS-IS systems. Link-state PDUs are flooded periodically throughout an area.

Also included is metric and IS-IS neighbor information. Each link-state PDU must be refreshed periodically on the network and is acknowledged by information within a sequence number PDU.

On point-to-point links, each link-state PDU is acknowledged by a partial sequence number PDU (PSNP), but on broadcast links, a complete sequence number PDU (CSNP) is sent out over the network. Any router that finds newer link-state PDU information in the CSNP then purges the out-of-date entry and updates the link-state database.

Link-state PDUs support variable-length subnet mask addressing.

- Complete sequence number PDUs (CSNPs)—Contain a complete list of all link-state PDUs in the IS-IS database. CSNPs are sent periodically on all links, and the receiving systems use the information in the CSNP to update and synchronize their link-state PDU databases. The designated router multicasts CSNPs on broadcast links in place of sending explicit acknowledgments for each link-state PDU.

Contained within the CSNP is a link-state PDU identifier, a lifetime, a sequence number, and a checksum for each entry in the database. Periodically, a CSNP is sent on both broadcast and point-to-point links to maintain a correct database. Also, the advertisement of CSNPs occurs when an adjacency is formed with another router. Like IS-IS hello PDUs, CSNPs come in two types: Level 1 and Level 2.

When a device receives a CSNP, it checks the database entries against its own local link-state database. If it detects missing information, the device requests specific link-state PDU details using a partial sequence number PDU (PSNP).

- Partial sequence number PDUs (PSNPs)—Sent multicast by a receiver when it detects that it is missing a link-state PDU (when its link-state PDU database is out of date). The receiver sends a PSNP to the system that transmitted the CSNP, effectively



requesting that the missing link-state PDU be transmitted. That routing device, in turn, forwards the missing link-state PDU to the requesting routing device.

A PSNP is used by an IS-IS router to request link-state PDU information from a neighboring router. A PSNP can also explicitly acknowledge the receipt of a link-state PDU on a point-to-point link. On a broadcast link, a CSNP is used as implicit knowledge. Like hello PDUs and CSNPs, the PSNP also has two types: Level 1 and Level 2.

When a device compares a CSNP to its local database and determines that a link-state PDU is missing, the router issues a PSNP for the missing link-state PDU, which is returned in a link-state PDU from the router sending the CSNP. The received link-state PDU is then stored in the local database, and an acknowledgment is sent back to the originating router.

### Persistent Route Reachability

IPv4 and IPv6 route reachability information in IS-IS link-state PDUs is preserved when you commit a configuration. IP prefixes are preserved with their original packet fragment upon link-state PDU regeneration.


### IS-IS Support for Multipoint Network Clouds

IS-IS does not support multipoint configurations. Therefore, when configuring Frame Relay or Asynchronous Transfer Mode (ATM) networks, you must configure them as collections of point-to-point links, not as multipoint clouds.

### Installing a Default Route to the Nearest Routing Device That Operates at Both IS-IS Levels

When a routing device that operates as both a Level 1 and Level 2 router (Router B) determines that it can reach at least one area other than its own (for example, in Area Y), it sets the ATTACHED bit in its Level 1 link-state PDU. Thereafter, the Level 1 router (Router A) introduces a default route pointing to the nearest attached routing device that operates as both a Level 1 and Level 2 router (Router B). See [Figure 86 on page 3117](#).

**Figure 86: Install Default Route to Nearest Routing Device That Operates at Both Level 1 and Level 2**

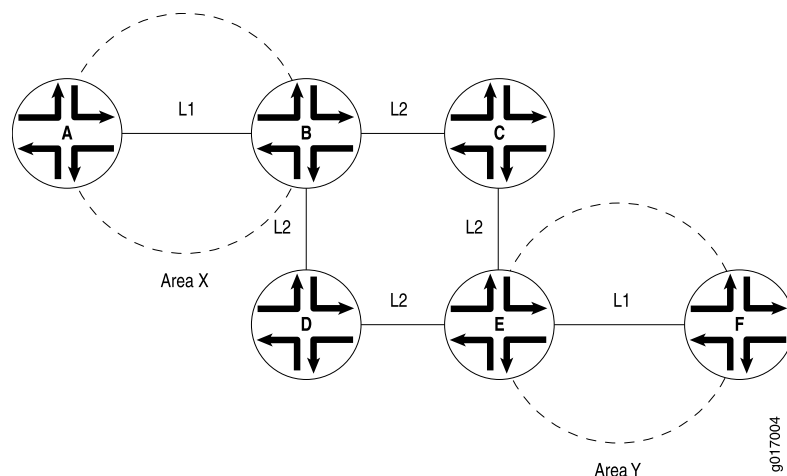



**Related Documentation** • [IS-IS Configuration Guide](#)

## Understanding BFD Authentication for IS-IS

Bidirectional Forwarding Detection (BFD) enables rapid detection of communication failures between adjacent systems. By default, authentication for BFD sessions is disabled. However, when running BFD over Network Layer protocols, the risk of service attacks can be significant. We strongly recommend using authentication if you are running BFD over multiple hops or through insecure tunnels. Beginning with Junos OS Release 9.6, Junos OS supports authentication for BFD sessions running over IS-IS. BFD authentication is only supported in the domestic image and is not available in the export image.

You authenticate BFD sessions by specifying an authentication algorithm and keychain, and then associating that configuration information with a security authentication keychain using the keychain name.

The following sections describe the supported authentication algorithms, security keychains, and level of authentication that can be configured:

- [BFD Authentication Algorithms on page 3118](#)
- [Security Authentication Keychains on page 3119](#)
- [Strict Versus Loose Authentication on page 3119](#)

### BFD Authentication Algorithms

---

Junos OS supports the following algorithms for BFD authentication:

- **simple-password**—Plain-text password. One to 16 bytes of plain text are used to authenticate the BFD session. One or more passwords might be configured. This method is the least secure and should be used only when BFD sessions are not subject to packet interception.
- **keyed-md5**—Keyed Message Digest 5 hash algorithm for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed MD5 uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than or equal to the last sequence number received. Although more secure than a simple password, this method is vulnerable to replay attacks. Increasing the rate at which the sequence number is updated can reduce this risk.
- **meticulous-keyed-md5**—Meticulous keyed Message Digest 5 hash algorithm. This method works in the same manner as keyed MD5, but the sequence number is updated with every packet. Although more secure than keyed MD5 and simple passwords, this method might take additional time to authenticate the session.
- **keyed-sha-1**—Keyed Secure Hash Algorithm 1 for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed SHA uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. The key is not carried within the packets. With this method,



packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than the last sequence number received.

- **meticulous-keyed-sha-1**—Meticulous keyed Secure Hash Algorithm I. This method works in the same manner as keyed SHA, but the sequence number is updated with every packet. Although more secure than keyed SHA and simple passwords, this method might take additional time to authenticate the session.



**NOTE:** Nonstop active routing (NSR) is not supported with meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

### Security Authentication Keychains

The security authentication keychain defines the authentication attributes used for authentication key updates. When the security authentication keychain is configured and associated with a protocol through the keychain name, authentication key updates can occur without interrupting routing and signaling protocols.

The authentication keychain contains one or more keychains. Each keychain contains one or more keys. Each key holds the secret data and the time at which the key becomes valid. The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.

BFD allows multiple clients per session, and each client can have its own keychain and algorithm defined. To avoid confusion, we recommend specifying only one security authentication keychain.

### Strict Versus Loose Authentication

By default, strict authentication is enabled and authentication is checked at both ends of each BFD session. Optionally, to smooth migration from nonauthenticated sessions to authenticated sessions, you can configure *loose checking*. When loose checking is configured, packets are accepted without authentication being checked at each end of the session. This feature is intended for transitional periods only.

#### Related Documentation

- [Example: Configuring BFD Authentication for IS-IS on page 3153](#)

### Understanding Hitless Authentication Key Rollover for IS-IS

IS-IS protocol exchanges can be authenticated to guarantee that only trusted routing devices participate in routing. By default, authentication is disabled. The authentication algorithm creates an encoded checksum that is included in the transmitted packet. The receiving routing device uses an authentication key (password) to verify the packet's checksum.



If you configure authentication for all peers, each peer in that group inherits the group's authentication.

You can update authentication keys without resetting any IS-IS neighbor sessions. This is referred to as *hitless authentication key rollover*.

Hitless authentication key rollover uses authentication keychains, which consist of the authentication keys that are being updated. The keychain includes multiple keys. Each key in the keychain has a unique start time. At the next key's start time, a rollover occurs from the current key to the next key, and the next key becomes the current key.

You can choose the algorithm through which authentication is established. You can configure MD5 or SHA-1 authentication. You associate a keychain and the authentication algorithm with an IS-IS neighboring session. Each key contains an identifier and a secret password.

The sending peer chooses the active key based on the system time and the start times of the keys in the keychain. The receiving peer determines the key with which it authenticates based on the incoming key identifier.

You can configure either RFC 5304-based encoding or RFC 5310-based encoding for the IS-IS protocol transmission encoding format.

**Related  
Documentation**

- [Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 3135](#)



## CHAPTER 35

# Configuration

- [Configuration Guidelines on page 3121](#)
- [Configuration Examples on page 3126](#)
- [Configuration Tasks on page 3178](#)
- [Configuration Statements on page 3180](#)

### Configuration Guidelines

---

- [Example: Configuring IS-IS on page 3121](#)

### Example: Configuring IS-IS

This example shows how to configure IS-IS.

- [Requirements on page 3121](#)
- [Overview on page 3121](#)
- [Configuration on page 3122](#)
- [Verification on page 3124](#)

#### Requirements

---

No special configuration beyond device initialization is required before configuring this example.

#### Overview

---


In this example, you configure the two IS-IS routing devices in a single area. The devices have NET addresses 49.0002.0192.0168.0001.00 and 49.0002.0192.0168.0002.00 on the lo0 interfaces. Additionally, you configure the ISO family on the IS-IS interfaces.

For Junos OS security devices only, you configure the **mode packet-based** statement at the **[edit security forwarding-options family iso]** hierarchy level.

[Figure 87 on page 3122](#) shows the topology used in this example.



Figure 87: Simple IS-IS Topology

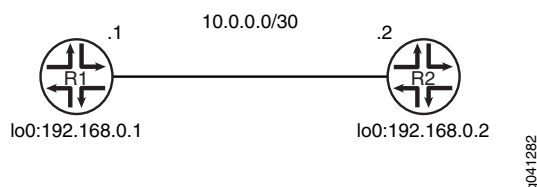

“CLI Quick Configuration” on page 3122 shows the configuration for both of the devices in Figure 87 on page 3122. The section “Step-by-Step Procedure” on page 3122 describes the steps on Device R1.

### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```

set security forwarding-options family iso mode packet-based
set interfaces ge-1/2/0 unit 0 description to-R2
set interfaces ge-1/2/0 unit 0 family inet address 10.0.0.1/30
set interfaces ge-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.1/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
set protocols isis interface ge-1/2/0.0
set protocols isis interface lo0.0
  
```

**Device R2**

```

set security forwarding-options family iso mode packet-based
set interfaces ge-1/2/0 unit 0 description to-R1
set interfaces ge-1/2/0 unit 0 family inet address 10.0.0.2/30
set interfaces ge-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.2/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0002.00
set protocols isis interface ge-1/2/0.0
set protocols isis interface lo0.0
  
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure IS-IS:

1. Enable IS-IS if your router is in secure context.
 

```

[edit security forwarding-options family iso]
user@R1# set mode packet-based
      
```
2. Create the interface that connects to Device R2, and configure the ISO family on the interface.
 

```

[edit interfaces ge-1/2/0 unit 0]
user@R1# set description to-R2
user@R1# set family inet address 10.0.0.1/30
user@R1# set family iso
      
```



3. Create the loopback interface, set the IP address, and set the NET address.

```
[edit interfaces lo0 unit 0]
user@R1# set family inet address 192.168.0.1/32
user@R1# set family iso address 49.0002.0192.0168.0001.00
```

4. Enable IS-IS on the interfaces.

```
[edit protocols isis]
user@R1# set interface ge-1/2/0.0
user@R1# set interface lo0.0
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show security** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show security
forwarding-options {
  family iso {
    mode packet-based;
  }
}

user@R1# show interfaces
ge-1/2/0 {
  unit 0 {
    description to-R2;
    family inet {
      address 10.0.0.1/30;
    }
    family iso;
  }
}
lo0 {
  unit 0 {
    family inet {
      address 192.168.0.1/32;
    }
    family iso {
      address 49.0002.0192.0168.0001.00;
    }
  }
}

user@R1# show protocols
isis {
  interface ge-1/2/0.0;
  interface lo0.0;
}
```

If you are done configuring the device, enter **commit** from configuration mode.



## Verification

Confirm that the configuration is working properly.

- [Verifying IS-IS Interface Configuration on page 3124](#)
- [Verifying IS-IS Interface Configuration in Detail on page 3124](#)
- [Verifying IS-IS Adjacencies on page 3125](#)
- [Verifying IS-IS Adjacencies in Detail on page 3125](#)

### Verifying IS-IS Interface Configuration

**Purpose** Verify the status of the IS-IS-enabled interfaces.

**Action** From operational mode, enter the **show isis interface brief** command.

```
user@R1> show isis interface brief
IS-IS interface database:
Interface          L CirID Level 1 DR          Level 2 DR          L1/L2 Metric
lo0.0              0  0x1 Passive                Passive              0/0
ge-1/2/0.0         3  0x1 R2.02                  R2.02              10/10
```

**Meaning** Verify that the output shows the intended configuration of the interfaces on which IS-IS is enabled.

### Verifying IS-IS Interface Configuration in Detail

**Purpose** Verify the details of IS-IS-enabled interfaces.

**Action** From operational mode, enter the **show isis interface detail** command.

```
user@R1> show isis interface detail
IS-IS interface database:
lo0.0
  Index: 75, State: 0x6, Circuit id: 0x1, Circuit type: 0
  LSP interval: 100 ms, CSNP interval: disabled
  Adjacency advertisement: Advertise
  Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
    1                0        64      0 Passive
    2                0        64      0 Passive
ge-1/2/0.0
  Index: 77, State: 0x6, Circuit id: 0x1, Circuit type: 3
  LSP interval: 100 ms, CSNP interval: 10 s
  Adjacency advertisement: Advertise
  Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
    1                1        64     10   9.000    27 R2.02 (not us)
    2                1        64     10   9.000    27 R2.02 (not us)
```

**Meaning** Check the following output fields and verify that the output shows the intended configuration of IS-IS-enabled interfaces:

- Interface—Interface configured for IS-IS.
- State—Internal implementation information.
- Circuit id—Circuit identifier.



- Circuit type—Configured level of IS-IS:
  - 1—Level 1 only
  - 2—Level 2 only
  - 3—Level 1 and Level 2
- link-state PDU interval—Time between IS-IS information messages.
- L or Level—Type of adjacency:
  - 1—Level 1 only
  - 2—Level 2 only
  - 3—Level 1 and Level 2
- Adjacencies—Adjacencies established on the interface.
- Priority—Priority value established on the interface.
- Metric—Metric value for the interface.
- Hello(s)—Intervals between hello PDUs.
- Hold(s)—Hold time on the interface.

### *Verifying IS-IS Adjacencies*

**Purpose** Display brief information about IS-IS neighbors.

**Action** From operational mode, enter the **show isis adjacency brief** command.

```
user@R1> show isis adjacency brief
```

Interface	System	L	State	Hold (secs)	SNPA
ge-1/2/0.0	R2	1	Up	6	0:5:85:8f:c8:bd
ge-1/2/0.0	R2	2	Up	6	0:5:85:8f:c8:bd

**Meaning** Verify the adjacent routers in the IS-IS database.

### *Verifying IS-IS Adjacencies in Detail*

**Purpose** Display extensive information about IS-IS neighbors.

**Action** From operational mode, enter the **show isis adjacency extensive** command.

```
user@R1> show isis adjacency extensive
```

```
R2
```

```
Interface: ge-1/2/0.0, Level: 1, State: Up, Expires in 6 secs
Priority: 64, Up/Down transitions: 1, Last transition: 00:40:28 ago
Circuit type: 3, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bd
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.0.2
Transition log:
```

When	State	Event	Down reason
Thu May 31 11:18:48	Up	SeenseIf	

R2



```
Interface: ge-1/2/0.0, Level: 2, State: Up, Expires in 8 secs
Priority: 64, Up/Down transitions: 1, Last transition: 00:40:28 ago
Circuit type: 3, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bd
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.0.2
Transition log:
When                State      Event      Down reason
Thu May 31 11:18:48  Up        SeenseIf
```

**Meaning** Check the following fields and verify the adjacency information about IS-IS neighbors:

- Interface—Interface through which the neighbor is reachable.
- L or Level—Configured level of IS-IS:
  - 1—Level 1 only
  - 2—Level 2 only
  - 3—Level 1 and Level 2

An exclamation point before the level number indicates that the adjacency is missing an IP address.

- State—Status of the adjacency: **Up**, **Down**, **New**, **One-way**, **Initializing**, or **Rejected**.
- Event—Message that identifies the cause of a state.
- Down reason—Reason the adjacency is down.
- Restart capable—A neighbor is configured for graceful restart.
- Transition log—List of transitions including **When**, **State**, and **Reason**.

**Related  
Documentation**

- Understanding IS-IS Configuration
- [Example: Configuring Designated Router Election Priority for IS-IS on page 3175](#)
- *Junos OS Feature Support Reference for SRX Series and J Series Devices*

---

## Configuration Examples

- [Example: Configuring Multi-Level IS-IS on page 3127](#)
- [Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 3135](#)
- [Example: Redistributing OSPF Routes into IS-IS on page 3139](#)
- [Example: Configuring BFD for IS-IS on page 3147](#)
- [Example: Configuring BFD Authentication for IS-IS on page 3153](#)
- [Example: Configuring IS-IS Multicast Topology on page 3156](#)
- [Example: Configuring IS-IS for CLNS on page 3172](#)
- [Example: Configuring IS-IS Designated Routers on page 3174](#)
- [Example: Enabling Packet Checksums on IS-IS Interfaces on page 3175](#)



## Example: Configuring Multi-Level IS-IS

This example shows how to configure a multi-level IS-IS topology.

- [Requirements on page 3127](#)
- [Overview on page 3127](#)
- [Configuration on page 3128](#)
- [Verification on page 3132](#)

### Requirements

No special configuration beyond device initialization is required before configuring this example.

### Overview


Like OSPF, the IS-IS protocol supports the partitioning of a routing domain into multiple areas with levels that control interarea flooding. The use of multiple levels improves protocol scalability, as Level 2 (backbone) link-state PDUs are normally not flooded into a Level 1 area.

An IS-IS Level 2 area is analogous to the OSPF backbone area (0), while a Level 1 area operates much like an OSPF totally stubby area, in that a default route is normally used to reach both inter-level and AS external routes.

Unlike OSPF, IS-IS area boundaries occur between routers, such that a given routing device is always wholly contained within a particular area. Level 1 adjacencies can be formed between routers that share a common area number, while a Level 2 adjacency can be formed between routers that might or might not share an area number.

[Figure 88 on page 3127](#) shows the topology used in this example.

**Figure 88: IS-IS Multi-Level Topology**

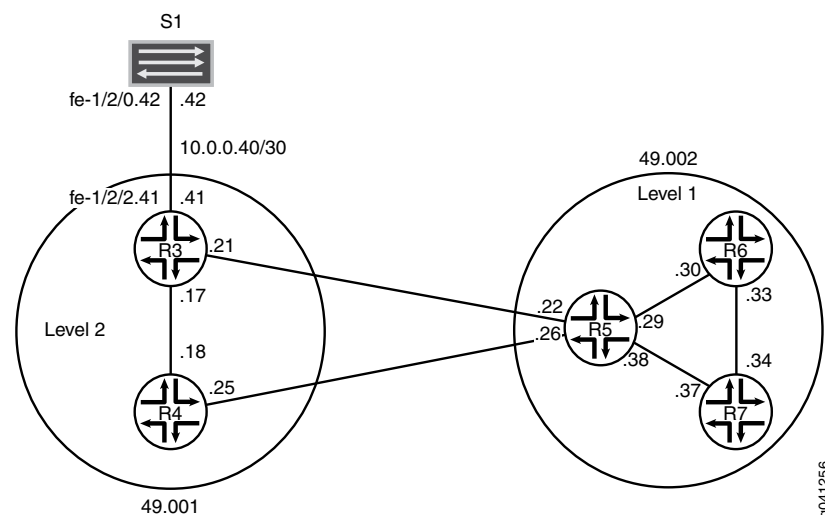



“CLI Quick Configuration” on page 3128 shows the configuration for all of the devices in Figure 88 on page 3127. The section “Step-by-Step Procedure” on page 3129 describes the steps on Device R5.

This example has the following characteristics:

- Device R5 functions as a Level 1/Level 2 router to interconnect the Level 2 backbone area 49.001 and the Level 1 area 49.002 containing Device R6 and Device R7.
- The system ID is based on the devices' IPv4 lo0 addresses.
- Loss of any individual interface does not totally disrupt the IS-IS operation.
- The IPv4 lo0 addresses of all routers are reachable through IS-IS.
- The link between Device R3 and Device S1 appears in area 49.001 as an intra-area route. No IS-IS adjacencies can be established on this interface. This is accomplished by configuring the **passive** statement on Device R3's interface to Device S1.
- The loopback addresses of Level 2 devices do not appear in a Level 1 area.
- There is only one adjacency for each device pairing.

---

### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R3**

```
set interfaces fe-1/2/0 unit 0 description to-R4
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.17/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R5
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.21/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.41/30
set interfaces fe-1/2/2 unit 0 description to-S1
set interfaces lo0 unit 0 family inet address 192.168.0.3/32
set interfaces lo0 unit 0 family iso address 49.001.0192.0168.0003.00
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface lo0.0 level 1 disable
set protocols isis interface fe-1/2/2.0 passive
```

**Device R4**

```
set interfaces fe-1/2/0 unit 0 description to-R3
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.18/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R5
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.25/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.4/32
set interfaces lo0 unit 0 family iso address 49.001.0192.0168.0004.00
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface lo0.0 level 1 disable
```



<b>Device R5</b>	<pre> set interfaces fe-1/2/0 unit 0 description to-R3 set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.22/30 set interfaces fe-1/2/0 unit 0 family iso set interfaces fe-1/2/1 unit 0 description to-R4 set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.26/30 set interfaces fe-1/2/1 unit 0 family iso set interfaces fe-1/2/2 unit 0 description to-R6 set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.29/30 set interfaces fe-1/2/2 unit 0 family iso set interfaces fe-1/2/3 unit 0 description to-R7 set interfaces fe-1/2/3 unit 0 family inet address 10.0.0.38/30 set interfaces fe-1/2/3 unit 0 family iso set interfaces lo0 unit 0 family inet address 192.168.0.5/32 set interfaces lo0 unit 0 family iso address 49.002.0192.0168.0005.00 set protocols isis interface fe-1/2/0.0 level 1 disable set protocols isis interface fe-1/2/1.0 level 1 disable set protocols isis interface fe-1/2/2.0 level 2 disable set protocols isis interface fe-1/2/3.0 level 2 disable set protocols isis interface lo0.0 level 1 disable </pre>
<b>Device R6</b>	<pre> set interfaces fe-1/2/0 unit 0 description to-R5 set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.30/30 set interfaces fe-1/2/0 unit 0 family iso set interfaces fe-1/2/1 unit 0 description to-R7 set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.33/30 set interfaces fe-1/2/1 unit 0 family iso set interfaces lo0 unit 0 family inet address 192.168.0.6/32 set interfaces lo0 unit 0 family iso address 49.002.0192.0168.0006.00 set protocols isis interface fe-1/2/0.0 level 2 disable set protocols isis interface fe-1/2/1.0 level 2 disable set protocols isis interface lo0.0 level 2 disable </pre>
<b>Device R7</b>	<pre> set interfaces fe-1/2/0 unit 0 description to-R6 set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.34/30 set interfaces fe-1/2/0 unit 0 family iso set interfaces fe-1/2/1 unit 0 description to-R5 set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.37/30 set interfaces fe-1/2/1 unit 0 family iso set interfaces lo0 unit 0 family inet address 192.168.0.7/32 set interfaces lo0 unit 0 family iso address 49.002.0192.0168.0007.00 set protocols isis interface fe-1/2/0.0 level 2 disable set protocols isis interface fe-1/2/1.0 level 2 disable set protocols isis interface lo0.0 level 2 disable </pre>
<b>Device S1</b>	<pre> set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.42/30 set interfaces fe-1/2/0 unit 0 description to-R3 </pre>
<b>Step-by-Step Procedure</b>	<p>The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see <i>Using the CLI Editor in Configuration Mode</i> in the CLI User Guide.</p> <p>To configure multi-level IS-IS:</p> <ol style="list-style-type: none"> <li>1. Configure the network interfaces.</li> </ol>



Enable IS-IS on the interfaces by including the ISO address family on each interface.

```
[edit interfaces]
user@R5# set fe-1/2/0 unit 0 description to-R3
user@R5# set fe-1/2/0 unit 0 family inet address 10.0.0.22/30
user@R5# set fe-1/2/0 unit 0 family iso
user@R5# set fe-1/2/1 unit 0 description to-R4
user@R5# set fe-1/2/1 unit 0 family inet address 10.0.0.26/30
user@R5# set fe-1/2/1 unit 0 family iso
user@R5# set fe-1/2/2 unit 0 description to-R6
user@R5# set fe-1/2/2 unit 0 family inet address 10.0.0.29/30
user@R5# set fe-1/2/2 unit 0 family iso
user@R5# set fe-1/2/3 unit 0 description to-R7
user@R5# set fe-1/2/3 unit 0 family inet address 10.0.0.38/30
user@R5# set fe-1/2/3 unit 0 family iso
```

2. Configure two loopback interface addresses.

One address is for IPv4.

The other is for the IS-IS area 49.002 so that Device R5 can form adjacencies with the other Level 1 devices in area 49.002. Even though Device R5's NET identifies itself as belonging to the Level 1 area 49.002, its loopback interface is not configured as a Level 1 interface. Doing so would cause the route to Device R5's loopback to be injected into the Level 1 area.

```
[edit interfaces lo0 unit 0]
user@R5# set family inet address 192.168.0.5/32
user@R5# set family iso address 49.002.0192.0168.0005.00
```

3. Specify the IS-IS level on a per-interface basis.

Device R5 becomes adjacent to the other routing devices on the same level on each link.

By default, IS-IS is enabled for IS-IS areas on all interfaces on which the ISO protocol family is enabled (at the **[edit interfaces *interface-name* unit *logical-unit-number*]** hierarchy level). To disable IS-IS at any particular level on an interface, include the **disable** statement.

Device R5's loopback interface is configured to run Level 2 only. If Level 1 operation were enabled on lo0.0, Device R5 would include its loopback address in its Level 1 link-state PDU, which is incorrect for this example in which the loopback addresses of Level 2 devices must not appear in a Level 1 area.

Unlike OSPF, you must explicitly list the router's lo0 interface at the **[edit protocols isis]** hierarchy level, because this interface is the source of the router's NET, and therefore must be configured as an IS-IS interface. In IS-IS, the lo0 interface operates in the passive mode by default, which is ideal because adjacency formation can never occur on a virtual interface.

```
[edit protocols isis]
user@R5# set interface fe-1/2/0.0 level 1 disable
user@R5# set interface fe-1/2/1.0 level 1 disable
user@R5# set interface fe-1/2/0.0 level 2 disable
user@R5# set interface fe-1/2/3.0 level 2 disable
user@R5# set interface lo0.0 level 1 disable
```



**Results** From configuration mode, confirm your configuration by entering the **show interfaces** and **show protocols** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R5# show interfaces
fe-1/2/0 {
  unit 0 {
    description to-R3;
    family inet {
      address 10.0.0.22/30;
    }
    family iso;
  }
}
fe-1/2/1 {
  unit 0 {
    description to-R4;
    family inet {
      address 10.0.0.26/30;
    }
    family iso;
  }
}
fe-1/2/2 {
  unit 0 {
    description to-R6;
    family inet {
      address 10.0.0.29/30;
    }
    family iso;
  }
}
fe-1/2/3 {
  unit 0 {
    description to-R7;
    family inet {
      address 10.0.0.38/30;
    }
    family iso;
  }
}
lo0 {
  unit 0 {
    family inet {
      address 192.168.0.5/32;
    }
    family iso {
      address 49.002.0192.0168.0005.00;
    }
  }
}
user@R5# show protocols
isis {
  interface fe-1/2/0.0 {
    level 1 disable;
  }
}

```



```

}
interface fe-1/2/1.0 {
  level 1 disable;
}
interface fe-1/2/0.0 {
  level 2 disable;
}
interface fe-1/2/3.0 {
  level 2 disable;
}
interface lo0.0 {
  level 1 disable;
}
}

```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.

- [Checking Interface-to-Area Associations on page 3132](#)
- [Verifying IS-IS Adjacencies on page 3132](#)
- [Examining the IS-IS Database on page 3133](#)

#### *Checking Interface-to-Area Associations*

**Purpose** Make sure that the interface-to-area associations are configured as expected.

**Action** From operational mode, enter the **show isis interface** command.

```

user@R5> show isis interface
IS-IS interface database:

```

Interface	L	CirID	Level 1 DR	Level 2 DR	L1/L2 Metric
lo0.0	0	0x1	Disabled	Passive	0/0
fe-1/2/0.0	2	0x3	Disabled	R5.03	10/10
fe-1/2/1.0	2	0x2	Disabled	R5.02	10/10
fe-1/2/0.0	1	0x1	R6.02	Disabled	10/10
fe-1/2/3.0	1	0x4	R5.04	Disabled	10/10

**Meaning** The output shows that Device R5's interfaces have been correctly configured with the ISO family, and that the interfaces have been placed into the correct levels.

You can also see that Device R5 has elected itself as the designated intermediate system (DIS) on its broadcast-capable IS-IS interfaces.

#### *Verifying IS-IS Adjacencies*

**Purpose** Verify that the expected adjacencies have formed between Device R5 and its IS-IS neighbors.

**Action** From operational mode, enter the **show isis adjacency detail** command.

```

user@R5> show isis adjacency detail

```



```

R3
Interface: fe-1/2/0.0, Level: 2, State: Up, Expires in 25 secs
Priority: 64, Up/Down transitions: 1, Last transition: 03:19:31 ago
Circuit type: 2, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bc
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R5.03, IP addresses: 10.0.0.21

R4
Interface: fe-1/2/1.0, Level: 2, State: Up, Expires in 24 secs
Priority: 64, Up/Down transitions: 1, Last transition: 03:19:36 ago
Circuit type: 2, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bc
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R5.02, IP addresses: 10.0.0.25

R6
Interface: fe-1/2/0.0, Level: 1, State: Up, Expires in 6 secs
Priority: 64, Up/Down transitions: 1, Last transition: 03:20:24 ago
Circuit type: 1, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bd
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R6.02, IP addresses: 10.0.0.30

R7
Interface: fe-1/2/3.0, Level: 1, State: Up, Expires in 21 secs
Priority: 64, Up/Down transitions: 1, Last transition: 03:19:29 ago
Circuit type: 1, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bc
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R5.04, IP addresses: 10.0.0.37

```

**Meaning** These results confirm that Device R5 has two Level 2 adjacencies and two Level 1 adjacencies.

### *Examining the IS-IS Database*

**Purpose** Because Device R5 is a L1/L2 attached router, examine the Level 1 link-state database associated with area 49.002 to confirm that loopback addresses from backbone routers are not being advertised into the Level 1 area.

**Action** From operational mode, enter the **show isis database detail** command.

```

user@R5> show isis database detail
IS-IS level 1 link-state database:

R5.00-00 Sequence: 0x19, Checksum: 0x7488, Lifetime: 727 secs
  IS neighbor: R5.04                      Metric:      10
  IS neighbor: R6.02                      Metric:      10
  IP prefix: 10.0.0.28/30                  Metric:      10 Internal Up
  IP prefix: 10.0.0.36/30                  Metric:      10 Internal Up

R5.04-00 Sequence: 0x14, Checksum: 0x2668, Lifetime: 821 secs
  IS neighbor: R5.00                      Metric:       0
  IS neighbor: R7.00                      Metric:       0

R6.00-00 Sequence: 0x17, Checksum: 0xa65, Lifetime: 774 secs
  IS neighbor: R6.02                      Metric:      10
  IS neighbor: R7.02                      Metric:      10

```



```

IP prefix: 10.0.0.28/30          Metric:      10 Internal Up
IP prefix: 10.0.0.32/30          Metric:      10 Internal Up
IP prefix: 192.168.0.6/32        Metric:      0 Internal Up

R6.02-00 Sequence: 0x13, Checksum: 0xd1c0, Lifetime: 908 secs
IS neighbor: R5.00               Metric:      0
IS neighbor: R6.00               Metric:      0

R7.00-00 Sequence: 0x17, Checksum: 0xe39, Lifetime: 775 secs
IS neighbor: R5.04               Metric:      10
IS neighbor: R7.02               Metric:      10
IP prefix: 10.0.0.32/30          Metric:      10 Internal Up
IP prefix: 10.0.0.36/30          Metric:      10 Internal Up
IP prefix: 192.168.0.7/32        Metric:      0 Internal Up

R7.02-00 Sequence: 0x13, Checksum: 0x404d, Lifetime: 966 secs
IS neighbor: R6.00               Metric:      0
IS neighbor: R7.00               Metric:      0

IS-IS level 2 link-state database:

R3.00-00 Sequence: 0x17, Checksum: 0x5f84, Lifetime: 1085 secs
IS neighbor: R4.02               Metric:      10
IS neighbor: R5.03               Metric:      10
IP prefix: 10.0.0.16/30          Metric:      10 Internal Up
IP prefix: 10.0.0.20/30          Metric:      10 Internal Up
IP prefix: 10.0.0.40/30          Metric:      10 Internal Up
IP prefix: 192.168.0.3/32        Metric:      0 Internal Up

R4.00-00 Sequence: 0x17, Checksum: 0xab3a, Lifetime: 949 secs
IS neighbor: R4.02               Metric:      10
IS neighbor: R5.02               Metric:      10
IP prefix: 10.0.0.16/30          Metric:      10 Internal Up
IP prefix: 10.0.0.24/30          Metric:      10 Internal Up
IP prefix: 192.168.0.4/32        Metric:      0 Internal Up

R4.02-00 Sequence: 0x14, Checksum: 0xf2a8, Lifetime: 1022 secs
IS neighbor: R3.00               Metric:      0
IS neighbor: R4.00               Metric:      0

R5.00-00 Sequence: 0x1f, Checksum: 0x20d7, Lifetime: 821 secs
IS neighbor: R5.02               Metric:      10
IS neighbor: R5.03               Metric:      10
IP prefix: 10.0.0.20/30          Metric:      10 Internal Up
IP prefix: 10.0.0.24/30          Metric:      10 Internal Up
IP prefix: 10.0.0.28/30          Metric:      10 Internal Up
IP prefix: 10.0.0.32/30          Metric:      20 Internal Up
IP prefix: 10.0.0.36/30          Metric:      10 Internal Up
IP prefix: 192.168.0.5/32        Metric:      0 Internal Up
IP prefix: 192.168.0.6/32        Metric:      10 Internal Up
IP prefix: 192.168.0.7/32        Metric:      10 Internal Up

R5.02-00 Sequence: 0x14, Checksum: 0x6135, Lifetime: 977 secs
IS neighbor: R4.00               Metric:      0
IS neighbor: R5.00               Metric:      0

R5.03-00 Sequence: 0x14, Checksum: 0x1483, Lifetime: 1091 secs
IS neighbor: R3.00               Metric:      0
IS neighbor: R5.00               Metric:      0

```



**Meaning** This display indicates that Device R5's loopback interface is correctly configured to run Level 2 only. Had Level 1 operation been enabled on lo0.0, Device R5 would have then included its loopback address in its Level 1 link-state PDU.

You can also see that Device R5 has Level 2 link-state PDUs, received from its adjacent neighbors.

Like an OSPF totally stubby area, no backbone (Level 2) or external prefixes are leaked into a Level 1 area, by default. Level 1 prefixes are leaked up into the IS-IS backbone, however, as can be seen in Device R5's Level 2 link-state PDU.

**Related Documentation**

- [Understanding IS-IS Areas](#)

## Example: Configuring Hitless Authentication Key Rollover for IS-IS

This example shows how to configure hitless authentication key rollover for IS-IS.

- [Requirements on page 3135](#)
- [Overview on page 3135](#)
- [Configuration on page 3136](#)
- [Verification on page 3139](#)

### Requirements

No special configuration beyond device initialization is required before configuring hitless authentication key rollover for IS-IS.

### Overview

Authentication guarantees that only trusted routers participate in routing updates. This keychain authentication method is referred to as hitless because the keys roll over from one to the next without resetting any peering sessions or interrupting the routing protocol. Junos OS supports both RFC 5304, *IS-IS Cryptographic Authentication* and RFC 5310, *IS-IS Generic Cryptographic Authentication*.

This example includes the following statements for configuring the keychain:

- **algorithm**—For each key in the keychain, you can specify an encryption algorithm. The algorithm can be SHA-1 or MD-5.
- **key**—A keychain can have multiple keys. Each key within a keychain must be identified by a unique integer value. The range of valid identifier values is from 0 through 63.
- **key-chain**—For each keychain, you must specify a name. This example defines two keychains: **base-key-global** and **base-key-inter**.
- **options**—For each key in the keychain, you can specify the encoding for the message authentication code: **isis-enhanced** or **basic**. The basic (RFC 5304) operation is enabled by default.



When you configure the **isis-enhanced** option, Junos OS sends RFC 5310-encoded routing protocol packets and accepts both RFC 5304-encoded and RFC 5310-encoded routing protocol packets that are received from other devices.

When you configure **basic** (or do not include the **options** statement in the key configuration), Junos OS sends and receives RFC 5304-encoded routing protocols packets, and drops 5310-encoded routing protocol packets that are received from other devices.

Because this setting is for IS-IS only, the TCP and the BFD protocols ignore the encoding option configured in the key.

- **secret**—For each key in the keychain, you must set a secret password. This password can be entered in either encrypted or plain text format in the **secret** statement. It is always displayed in encrypted format.
- **start-time**—Each key must specify a start time in UTC format. Control gets passed from one key to the next. When a configured start time arrives (based on the routing device's clock), the key with that start time becomes active. Start times are specified in the local time zone for a routing device and must be unique within the key chain.


You can apply a keychain globally to all interfaces or more granularly to specific interfaces.

This example includes the following statements for applying the keychain to all interfaces or to particular interfaces:

- **authentication-key-chain**—Enables you to apply a keychain at the global IS-IS level for all Level 1 or all Level 2 interfaces.
- **hello-authentication-key-chain**—Enables you to apply a keychain at the individual IS-IS interface level. The interface configuration overrides the global configuration.

Figure 89 on page 3136 shows the topology used in the example.

**Figure 89: Hitless Authentication Key Rollover for IS-IS**

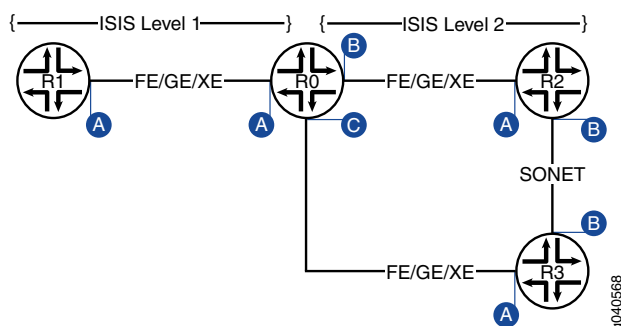

This example shows the configuration for Router R0.

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.



```

set interfaces ge-0/0/0 unit 0 description "interface A"
set interfaces ge-0/0/0 unit 0 family inet address 10.0.0.1/30
set interfaces ge-0/0/0 unit 0 family iso
set interfaces ge-0/0/0 unit 0 family inet6 address fe80::200:f8ff:fe21:67cf/128
set interfaces ge-0/0/1 unit 0 description "interface B"
set interfaces ge-0/0/1 unit 0 family inet address 10.0.0.5/30
set interfaces ge-0/0/1 unit 0 family iso
set interfaces ge-0/0/1 unit 0 family inet6 address 10FB::C:ABC:1FOC:44DA/128
set interfaces ge-0/0/2 unit 0 description "interface C"
set interfaces ge-0/0/2 unit 0 family inet address 10.0.0.9/30
set interfaces ge-0/0/2 unit 0 family iso
set interfaces ge-0/0/2 unit 0 family inet6 address ff06::c3/128
set security authentication-key-chains key-chain base-key-global key 63 secret
"$9$jkqfTQnCpBDiCt"
set security authentication-key-chains key-chain base-key-global key 63 start-time
"2011-8-6.06:54:00-0700"
set security authentication-key-chains key-chain base-key-global key 63 algorithm
hmac-sha-1
set security authentication-key-chains key-chain base-key-global key 63 options
isis-enhanced
set security authentication-key-chains key-chain base-key-inter key 0 secret
"$9$8sgx7Vws4ZDkWLGD"
set security authentication-key-chains key-chain base-key-inter key 0 start-time
"2011-8-6.06:54:00-0700"
set security authentication-key-chains key-chain base-key-inter key 0 algorithm md5
set security authentication-key-chains key-chain base-key-inter key 0 options basic
set protocols isis level 1 authentication-key-chain base-key-global
set protocols isis interface ge-0/0/0.0 level 1 hello-authentication-key-chain
base-key-inter

```

#### Step-by-Step Procedure

To configure hitless authentication key rollover for IS-IS:

1. Configure the Router R0 interfaces.

```

[edit interfaces ge-0/0/0 unit 0]
user@R0# set description "interface A"
user@R0# set family inet address 10.0.0.1/30
user@R0# set family iso
user@R0# set family inet6 address fe80::200:f8ff:fe21:67cf/128
[edit interfaces ge-0/0/1 unit 0]
user@R0# set interfaces ge-0/0/1 unit 0 description "interface B"
user@R0# set interfaces ge-0/0/1 unit 0 family inet address 10.0.0.5/30
user@R0# set interfaces ge-0/0/1 unit 0 family iso
user@R0# set interfaces ge-0/0/1 unit 0 family inet6 address
10FB::C:ABC:1FOC:44DA/128
[edit interfaces ge-0/0/2 unit 0]
user@R0# set description "interface C"
user@R0# set family inet address 10.0.0.9/30
user@R0# set interfaces ge-0/0/2 unit 0 family iso
user@R0# set interfaces ge-0/0/2 unit 0 family inet6 address ff06::c3/128

```

2. Configure one or more authentication keys.

```

[edit security authentication-key-chains key-chain base-key-global]
user@R0# set key 63 secret "$9$jkqfTQnCpBDiCt"
user@R0# set key 63 start-time "2011-8-6.06:54:00-0700"

```



```
user@R0# set key 63 algorithm hmac-sha-1
user@R0# set key 63 options isis-enhanced
[edit security authentication-key-chains key-chain base-key-inter]
user@R0# set key 0 secret "$9$8sgx7Vws4ZDkWLGD"
user@R0# set key 0 start-time "2011-8-6.06:54:00-0700"
user@R0# set key 0 algorithm md5
user@R0# set key 0 options basic
```

3. Apply the base-key-global keychain to all Level 1 IS-IS interfaces on Router R0.

```
[edit protocols isis level 1]
user@R0# set authentication-key-chain base-key-global
```

4. Apply the base-key-inter keychain to the ge-0/0/0.0 interface on Router R0.

```
[edit protocols isis interface ge-0/0/0.0 level 1]
user@R0# set hello-authentication-key-chain base-key-inter
```

5. If you are done configuring the device, commit the configuration.

```
user@R0# commit
```

### Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show security** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R0# show interfaces
ge-0/0/0 {
  unit 0 {
    description "interface A";
    family inet {
      address 10.0.0.1/30;
    }
    family iso;
    family inet6 {
      address fe80::200:f8ff:fe21:67cf/128;
    }
  }
}
ge-0/0/1 {
  unit 0 {
    description "interface B";
    family inet {
      address 10.0.0.5/30;
    }
    family iso;
    family inet6 {
      address 10fb::c:abc:1f0c:44da/128;
    }
  }
}
ge-0/0/2 {
  unit 0 {
    description "interface C";
    family inet {
```



```

        address 10.0.0.9/30;
    }
    family iso;
    family inet6 {
        address ff06::c3/128;
    }
}

user@R0# show protocols
isis {
    level 1 authentication-key-chain base-key-global;
    interface ge-0/0/0.0 {
        level 1 hello-authentication-key-chain base-key-inter;
    }
}

user@R0# show security
authentication-key-chains {
    key-chain base-key-global {
        key 63 {
            secret "$9$jfkqfTQnCpBDiCt"; ## SECRET-DATA
            start-time "2011-8-6.06:54:00-0700";
            algorithm hmac-sha-1;
            options isis-enhanced;
        }
    }
    key-chain base-key-inter {
        key 0 {
            secret "$9$8sgx7Vws4ZDkWLGD"; ## SECRET-DATA
            start-time "2011-8-6.06:54:00-0700";
            algorithm md5;
            options basic;
        }
    }
}

```

### Verification

To verify the configuration, run the following commands:

- [show isis authentication](#)
- [show security keychain](#)

### Related Documentation

- [Understanding Hitless Authentication Key Rollover for IS-IS on page 3119](#)

### Example: Redistributing OSPF Routes into IS-IS

This example shows how to redistribute OSPF routes into an IS-IS network.

- [Requirements on page 3140](#)
- [Overview on page 3140](#)



- [Configuration on page 3141](#)
- [Verification on page 3146](#)

## Requirements

No special configuration beyond device initialization is required before configuring this example.

## Overview

Export policy can be applied to IS-IS to facilitate route redistribution.


Junos OS does not support the application of import policy for link-state routing protocols like IS-IS because such policies can lead to inconsistent link-state database (LSDB) entries, which in turn can result in routing inconsistencies.

In this example, OSPF routes 192.168.0/24 through 192.168.3/24 are redistributed into IS-IS area 49.0002 from Device R2.

In addition, policies are configured to ensure that Device R1 can reach destinations on the 10.0.0.44/30 network, and that Device R3 can reach destinations on the 10.0.0.36/30 network. This enables end-to-end reachability.

[Figure 90 on page 3140](#) shows the topology used in this example.

**Figure 90: IS-IS Route Redistribution Topology**

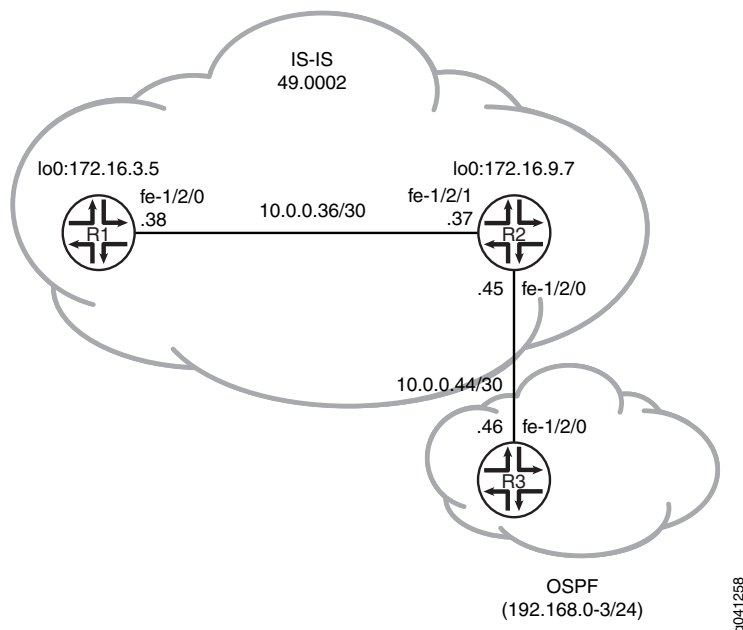

“CLI Quick Configuration” on [page 3141](#) shows the configuration for all of the devices in [Figure 90 on page 3140](#). The section “Step-by-Step Procedure” on [page 3142](#) describes the steps on Device R2. “Step-by-Step Procedure” on [page 3143](#) describes the steps on Device R3.



## Configuration

<b>CLI Quick Configuration</b>	To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the <b>[edit]</b> hierarchy level.
<b>Device R1</b>	<pre> set interfaces fe-1/2/0 unit 0 description to-R7 set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.38/30 set interfaces fe-1/2/0 unit 0 family iso set interfaces lo0 unit 0 family inet address 172.16.3.5/32 set interfaces lo0 unit 0 family iso address 49.0002.0172.0016.0305.00 set protocols isis interface fe-1/2/0.38 set protocols isis interface lo0.0 </pre>
<b>Device R2</b>	<pre> set interfaces fe-1/2/1 unit 0 description to-R5 set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.37/30 set interfaces fe-1/2/1 unit 0 family iso set interfaces fe-1/2/0 unit 0 description to-OSPF-network set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.45/30 set interfaces lo0 unit 0 family inet address 172.16.9.7/32 set interfaces lo0 unit 0 family iso address 49.0002.0172.0016.0907.00 set protocols isis export ospf-isis set protocols isis export send-direct-to-isis-neighbors set protocols isis interface fe-1/2/1.0 set protocols isis interface lo0.0 set protocols ospf export send-direct-to-ospf-neighbors set protocols ospf area 0.0.0.1 interface fe-1/2/0.0 set protocols ospf area 0.0.0.1 interface lo0.0 passive set policy-options policy-statement ospf-isis term 1 from protocol ospf set policy-options policy-statement ospf-isis term 1 from route-filter 192.168.0.0/22   longer set policy-options policy-statement ospf-isis term 1 then accept set policy-options policy-statement send-direct-to-isis-neighbors from protocol direct set policy-options policy-statement send-direct-to-isis-neighbors from route-filter   10.0.0.44/30 exact set policy-options policy-statement send-direct-to-isis-neighbors then accept set policy-options policy-statement send-direct-to-ospf-neighbors from protocol direct set policy-options policy-statement send-direct-to-ospf-neighbors from route-filter   10.0.0.36/30 exact set policy-options policy-statement send-direct-to-ospf-neighbors then accept </pre>
<b>Device R3</b>	<pre> set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.46/30 set interfaces lo0 unit 0 family inet address 192.168.1.1/32 set interfaces lo0 unit 0 family inet address 192.168.2.1/32 set interfaces lo0 unit 0 family inet address 192.168.3.1/32 set interfaces lo0 unit 0 family inet address 192.168.0.1/32 set protocols ospf export ospf set protocols ospf area 0.0.0.1 interface fe-1/2/0.0 set protocols ospf area 0.0.0.1 interface lo0.0 passive set policy-options policy-statement ospf term 1 from protocol static set policy-options policy-statement ospf term 1 then accept set routing-options static route 192.168.0.0/24 discard set routing-options static route 192.168.1.0/24 discard set routing-options static route 192.168.3.0/24 discard </pre>



```
set routing-options static route 192.168.2.0/24 discard
```

**Step-by-Step  
Procedure**

To configure Device R2:

1. Configure the network interfaces.  

```
[edit interfaces]
user@R2# set fe-1/2/1 unit 0 description to-R5
user@R2# set fe-1/2/1 unit 0 family inet address 10.0.0.37/30
user@R2# set fe-1/2/1 unit 0 family iso
user@R2# set fe-1/2/0 unit 0 description to-OSPF-network
user@R2# set fe-1/2/0 unit 0 family inet address 10.0.0.45/30
user@R2# set lo0 unit 0 family inet address 172.16.9.7/32
user@R2# set lo0 unit 0 family iso address 49.0002.0172.0016.0907.00
```
2. Configure IS-IS on the interface facing Device R1 and the loopback interface.  

```
[edit protocols isis]
user@R2# set interface fe-1/2/1.0
user@R2# set interface lo0.0
```
3. Configure the policy that enables Device R1 to reach the 10.0.0.44/30 network.  

```
[edit policy-options policy-statement send-direct-to-isis-neighbors]
user@R2# set from protocol direct
user@R2# set from route-filter 10.0.0.44/30 exact
user@R2# set then accept
```
4. Apply the policy that enables Device R1 to reach the 10.0.0.44/30 network.  

```
[edit protocols isis]
user@R2# set export send-direct-to-isis-neighbors
```
5. Configure OSPF on the interfaces.  

```
[edit protocols ospf]
user@R2# set area 0.0.0.1 interface fe-1/2/0.0
user@R2# set area 0.0.0.1 interface lo0.0 passive
```
6. Configure the OSPF route redistribution policy.  

```
[edit policy-options policy-statement ospf-isis term 1]
user@R2# set from protocol ospf
user@R2# set from route-filter 192.168.0.0/22 longer
user@R2# set then accept
```
7. Apply the OSPF route redistribution policy to the IS-IS instance.  

```
[edit protocols isis]
user@R2# set export ospf-isis
```
8. Configure the policy that enables Device R3 to reach the 10.0.0.36/30 network.  

```
[edit policy-options policy-statement send-direct-to-ospf-neighbors]
user@R2# set from protocol direct
user@R2# set from route-filter 10.0.0.36/30 exact
user@R2# set then accept
```
9. Apply the policy that enables Device R3 to reach the 10.0.0.36/30 network.  

```
[edit protocols ospf]
user@R2# set export send-direct-to-ospf-neighbors
```



**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure multi-level IS-IS:

1. Configure the network interfaces.

Multiple addresses are configured on the loopback interface to simulate multiple route destinations.

```
[edit interfaces]
user@R3# set fe-1/2/0 unit 0 family inet address 10.0.0.46/30
user@R3# set lo0 unit 0 family inet address 192.168.1.1/32
user@R3# set lo0 unit 0 family inet address 192.168.2.1/32
user@R3# set lo0 unit 0 family inet address 192.168.3.1/32
user@R3# set lo0 unit 0 family inet address 192.168.0.1/32
```

2. Configure static routes to the loopback interface addresses.

These are the routes that are redistributed into IS-IS.

```
[edit routing-options static]
user@R3# set route 192.168.0.0/24 discard
user@R3# set route 192.168.1.0/24 discard
user@R3# set route 192.168.3.0/24 discard
user@R3# set route 192.168.2.0/24 discard
```

3. Configure OSPF on the interfaces.

```
[edit protocols ospf area 0.0.0.1]
user@R3# set interface fe-1/2/0.0
user@R3# set interface lo0.0 passive
```

4. Configure the OSPF policy to export the static routes.

```
[edit policy-options policy-statement ospf term 1]
user@R3# set from protocol static
user@R3# set then accept
```

5. Apply the OSPF export policy.

```
[edit protocols ospf]
user@R3# set export ospf
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
Device R2 user@R2# show interfaces
fe-1/2/1 {
  unit 0 {
    description to-R5;
    family inet {
      address 10.0.0.37/30;
    }
    family iso;
  }
}
```



```
}
fe-1/2/0 {
  unit 0 {
    description to-OSPF-network;
    family inet {
      address 10.0.0.45/30;
    }
  }
}
lo0 {
  unit 0 {
    family inet {
      address 172.16.9.7/32;
    }
    family iso {
      address 49.0002.0172.0016.0907.00;
    }
  }
}

user@R2# show protocols
isis {
  export [ ospf-isis send-direct-to-isis-neighbors ];
  interface fe-1/2/1.0;
  interface lo0.0;
}
ospf {
  export send-direct-to-ospf-neighbors;
  area 0.0.0.1 {
    interface fe-1/2/0.0;
    interface lo0.0 {
      passive;
    }
  }
}

user@R2# show policy-options
policy-statement ospf-isis {
  term 1 {
    from {
      protocol ospf;
      route-filter 192.168.0.0/22 longer;
    }
    then accept;
  }
}
policy-statement send-direct-to-isis-neighbors {
  from {
    protocol direct;
    route-filter 10.0.0.44/30 exact;
  }
  then accept;
}
policy-statement send-direct-to-ospf-neighbors {
  from {
    protocol direct;
```



```

        route-filter 10.0.0.36/30 exact;
    }
    then accept;
}

Device R3 user@R3# show interfaces
fe-1/2/0 {
    unit 0 {
        family inet {
            address 10.0.0.46/30;
        }
    }
}
lo0 {
    unit 0 {
        family inet {
            address 192.168.1.1/32;
            address 192.168.2.1/32;
            address 192.168.3.1/32;
            address 192.168.0.1/32;
        }
    }
}

user@R3# show protocols
ospf {
    export ospf;
    area 0.0.0.1 {
        interface fe-1/2/0.0;
        interface lo0.0 {
            passive;
        }
    }
}

user@R3# show policy-options
policy-statement ospf {
    term 1 {
        from protocol static;
        then accept;
    }
}

user@R3# show routing-options
static {
    route 192.168.0.0/24 discard;
    route 192.168.1.0/24 discard;
    route 192.168.3.0/24 discard;
    route 192.168.2.0/24 discard;
}

```

If you are done configuring the device, enter **commit** from configuration mode.



## Verification

Confirm that the configuration is working properly.

- [Verifying OSPF Route Advertisement on page 3146](#)
- [Verifying Route Redistribution on page 3146](#)
- [Verifying Connectivity on page 3147](#)

### Verifying OSPF Route Advertisement

**Purpose** Make sure that the expected routes are advertised by OSPF.

**Action** From operational mode on Device R2, enter the **show route protocol ospf** command.

```
user@R2> show route protocol ospf
```

```
inet.0: 15 destinations, 15 routes (15 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
192.168.0.0/24      *[OSPF/150] 03:54:21, metric 0, tag 0
                   > to 10.0.0.46 via fe-1/2/0.0
192.168.0.1/32     *[OSPF/10] 03:54:21, metric 1
                   > to 10.0.0.46 via fe-1/2/0.0
192.168.1.0/24     *[OSPF/150] 03:54:21, metric 0, tag 0
                   > to 10.0.0.46 via fe-1/2/0.0
192.168.1.1/32     *[OSPF/10] 03:54:21, metric 1
                   > to 10.0.0.46 via fe-1/2/0.0
192.168.2.0/24     *[OSPF/150] 03:54:21, metric 0, tag 0
                   > to 10.0.0.46 via fe-1/2/0.0
192.168.2.1/32     *[OSPF/10] 03:54:21, metric 1
                   > to 10.0.0.46 via fe-1/2/0.0
192.168.3.0/24     *[OSPF/150] 03:54:21, metric 0, tag 0
                   > to 10.0.0.46 via fe-1/2/0.0
192.168.3.1/32     *[OSPF/10] 03:54:21, metric 1
                   > to 10.0.0.46 via fe-1/2/0.0
224.0.0.5/32       *[OSPF/10] 03:56:03, metric 1
                   MultiRecv
```

```
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

**Meaning** The 192.168/16 routes are advertised by OSPF.

### Verifying Route Redistribution

**Purpose** Make sure that the expected routes are redistributed from OSPF into IS-IS.

**Action** From operational mode on Device R1, enter the **show route protocol isis** command.

```
user@R1> show route protocol isis
```

```
inet.0: 13 destinations, 13 routes (13 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
10.0.0.44/30       *[IS-IS/160] 03:45:24, metric 20
                   > to 10.0.0.37 via fe-1/2/0.0
```



```

172.16.9.7/32      *[IS-IS/15] 03:49:46, metric 10
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.0.0/24    *[IS-IS/160] 03:49:46, metric 10
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.0.1/32    *[IS-IS/160] 03:49:46, metric 11, tag2 1
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.1.0/24    *[IS-IS/160] 03:49:46, metric 10
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.1.1/32    *[IS-IS/160] 03:49:46, metric 11, tag2 1
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.2.0/24    *[IS-IS/160] 03:49:46, metric 10
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.2.1/32    *[IS-IS/160] 03:49:46, metric 11, tag2 1
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.3.0/24    *[IS-IS/160] 03:49:46, metric 10
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.3.1/32    *[IS-IS/160] 03:49:46, metric 11, tag2 1
                  > to 10.0.0.37 via fe-1/2/0.0

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

**Meaning** The 192.168/16 routes are redistributed into IS-IS.

#### *Verifying Connectivity*

**Purpose** Check that Device R1 can reach the destinations on Device R3.

**Action** From operational mode, enter the **ping** command.

```

user@R1> ping 192.168.1.1
PING 192.168.1.1 (192.168.1.1): 56 data bytes
64 bytes from 192.168.1.1: icmp_seq=0 ttl=63 time=2.089 ms
64 bytes from 192.168.1.1: icmp_seq=1 ttl=63 time=1.270 ms
64 bytes from 192.168.1.1: icmp_seq=2 ttl=63 time=2.135 ms

```

**Meaning** These results confirm that Device R1 can reach the destinations in the OSPF network.

**Related Documentation**

- [Understanding Routing Policies](#)

## Example: Configuring BFD for IS-IS

This example describes how to configure the Bidirectional Forwarding Detection (BFD) protocol to detect failures in an IS-IS network.

- [Requirements on page 3147](#)
- [Overview on page 3148](#)
- [Configuration on page 3148](#)
- [Verification on page 3151](#)

### Requirements

Before you begin, configure IS-IS on both routers. See [“Example: Configuring IS-IS” on page 3121](#) for information about the required IS-IS configuration.



This example uses the following hardware and software components:


- Junos OS Release 7.3 or later
- M Series, MX Series, and T Series routers

## Overview

This example shows two routers connected to each other. A loopback interface is configured on each router. IS-IS and BFD protocols are configured on both routers.

Figure 91 on page 3148 shows the sample network.

Figure 91: Configuring BFD for IS-IS

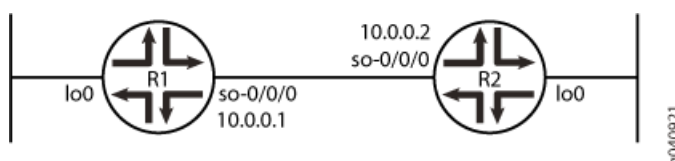

## Configuration

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

#### Router R1

```
set protocols isis interface so-0/0/0 bfd-liveness-detection detection-time threshold 5
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-interval 2
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-receive-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection no-adaptation
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval threshold 3
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval
  minimum-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection multiplier 2
set protocols isis interface so-0/0/0 bfd-liveness-detection version automatic
```

#### Router R2

```
set protocols isis interface so-0/0/0 bfd-liveness-detection detection-time threshold 6
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-interval 3
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-receive-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection no-adaptation
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval threshold 4
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval
  minimum-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection multiplier 2
set protocols isis interface so-0/0/0 bfd-liveness-detection version automatic
```



**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode.



**NOTE:** To simply configure BFD for IS-IS, only the `minimum-interval` statement is required. The BFD protocol selects default parameters for all the other configuration statements when you use the `bfd-liveness-detection` statement without specifying any parameters.



**NOTE:** You can change parameters at any time without stopping or restarting the existing session. BFD automatically adjusts to the new parameter value. However, no changes to BFD parameters take place until the values resynchronize with each BFD peer.

To configure BFD for IS-IS on Routers R1 and R2:

1. Enable BFD failure detection for IS-IS.
 

```
[edit protocols isis]
user@R1# set interface so-0/0/0 bfd-liveness-detection

[edit protocols isis]
user@R2# set interface so-0/0/0 bfd-liveness-detection
```
2. Configure the threshold for the adaptation of the detection time, which must be greater than the multiplier number multiplied by the minimum interval.
 

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set detection-time threshold 5

[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set detection-time threshold 6
```
3. Configure the minimum transmit and receive intervals for failure detection.
 

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set minimum-interval 2

[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set minimum-interval 3
```
4. Configure only the minimum receive interval for failure detection.
 

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set minimum-receive-interval 1

[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set minimum-receive-interval 1
```
5. Disable BFD adaptation.
 

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set no-adaptation
```



```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set no-adaptation
```

6. Configure the threshold for the transmit interval, which must be greater than the minimum transmit interval.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set transmit-interval threshold 3
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set transmit-interval threshold 4
```

7. Configure the minimum transmit interval for failure detection.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set transmit-interval minimum-interval 1
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set transmit-interval minimum-interval 1
```

8. Configure the multiplier number, which is the number of hello packets not received by the neighbor that causes the originating interface to be declared down.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set multiplier 2
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set multiplier 2
```

9. Configure the BFD version used for detection.

The default is to have the version detected automatically.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set version automatic
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set version automatic
```

### Results

From configuration mode, confirm your configuration by issuing the **show protocols isis interface** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show protocols isis interface so-0/0/0
```

```
bfd-liveness-detection {
  version automatic;
  minimum-interval 2;
  minimum-receive-interval 1;
  multiplier 2;
  no-adaptation;
  transmit-interval {
    minimum-interval 1;
    threshold 3;
  }
  detection-time {
    threshold 5;
  }
}
```

...



```
user@R2# show protocols isis interface so-0/0/0
```

```
    bfd-liveness-detection {
      version automatic;
      minimum-interval 3;
      minimum-receive-interval 1;
      multiplier 2;
      no-adaptation;
      transmit-interval {
        minimum-interval 1;
        threshold 4;
      }
      detection-time {
        threshold 6;
      }
    }
  ...
```

### Verification

Confirm that the configuration is working properly.

- [Verifying the Connection Between Routers R1 and R2 on page 3151](#)
- [Verifying That IS-IS Is Configured on page 3152](#)
- [Verifying That BFD Is configured on page 3152](#)

#### *Verifying the Connection Between Routers R1 and R2*

**Purpose** Make sure that Routers R1 and R2 are connected to each other.

**Action** Ping the other router to check the connectivity between the two routers as per the network topology.

```
user@R1> ping 10.0.0.2
```

```
PING 10.0.0.2 (10.0.0.2): 56 data bytes
64 bytes from 10.0.0.2: icmp_seq=0 ttl=64 time=1.367 ms
64 bytes from 10.0.0.2: icmp_seq=1 ttl=64 time=1.662 ms
64 bytes from 10.0.0.2: icmp_seq=2 ttl=64 time=1.291 ms
^C
--- 10.0.0.2 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.291/1.440/1.662/0.160 ms
```

```
user@R2> ping 10.0.0.1
```

```
PING 10.0.0.1 (10.0.0.1): 56 data bytes
64 bytes from 10.0.0.1: icmp_seq=0 ttl=64 time=1.287 ms
64 bytes from 10.0.0.1: icmp_seq=1 ttl=64 time=1.310 ms
64 bytes from 10.0.0.1: icmp_seq=2 ttl=64 time=1.289 ms
^C
--- 10.0.0.1 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.287/1.295/1.310/0.010 ms
```

**Meaning** Routers R1 and R2 are connected to each other.



**Verifying That IS-IS Is Configured**

**Purpose** Make sure that the IS-IS instance is running on both routers.

**Action** Use the **show isis database** statement to check if the IS-IS instance is running on both routers, R1 and R2.

user@R1> show isis database

```
IS-IS level 1 link-state database:
LSP ID          Sequence Checksum Lifetime Attributes
R1.00-00        0x4a571  0x30c5    1195 L1 L2
R2.00-00        0x4a586  0x4b7e    1195 L1 L2
R2.02-00        0x330ca1 0x3492    1196 L1 L2
  3 LSPs
```

```
IS-IS level 2 link-state database:
LSP ID          Sequence Checksum Lifetime Attributes
R1.00-00        0x4a856  0x5db0    1194 L1 L2
R2.00-00        0x4a89d  0x149b    1194 L1 L2
R2.02-00        0x1fb2ff 0xd302    1194 L1 L2
  3 LSPs
```

user@R2> show isis database

```
IS-IS level 1 link-state database:
LSP ID          Sequence Checksum Lifetime Attributes
R1.00-00        0x4b707  0xcc80    1195 L1 L2
R2.00-00        0x4b71b  0xeb37    1198 L1 L2
R2.02-00        0x33c2ce 0xb52d    1198 L1 L2
  3 LSPs
```

```
IS-IS level 2 link-state database:
LSP ID          Sequence Checksum Lifetime Attributes
R1.00-00        0x4b9f2  0xee70    1192 L1 L2
R2.00-00        0x4ba41  0x9862    1197 L1 L2
R2.02-00        0x3      0x6242    1198 L1 L2
  3 LSPs
```

**Meaning** IS-IS is configured on both routers, R1 and R2.

**Verifying That BFD Is configured**

**Purpose** Make sure that the BFD instance is running on both routers, R1 and R2.

**Action** Use the **show bfd session detail** statement to check if BFD instance is running on the routers.

user@R1> show bfd session detail

```
Address          State      Interface      Detect   Transmit
10.0.0.2         Up         so-0/0/0       Time    Interval  Multiplier
                2.000     1.000         2
Client ISIS R2, TX interval 0.001, RX interval 0.001
Client ISIS R1, TX interval 0.001, RX interval 0.001
Session down time 00:00:00, previous up time 00:00:15
Local diagnostic NbrSignal, remote diagnostic NbrSignal
Remote state AdminDown, version 1
Router 3, routing table index 17
```



```
1 sessions, 2 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps
```

```
user@R2> show bfd session detail
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
10.0.0.1	Up	so-0/0/0	2.000	1.000	2

```
Client ISIS R2, TX interval 0.001, RX interval 0.001
Session down time 00:00:00, previous up time 00:00:05
Local diagnostic NbrSignal, remote diagnostic NbrSignal
Remote state AdminDown, version 1
Router 2, routing table index 15
```

```
1 sessions, 1 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps
```

**Meaning** BFD is configured on Routers R1 and R2 for detecting failures in the IS-IS network.

**Related Documentation**

- [Understanding BFD for IS-IS](#)

## Example: Configuring BFD Authentication for IS-IS

This example shows how to configure BFD authentication for IS-IS.

- [Requirements on page 3153](#)
- [Overview on page 3153](#)
- [Configuration on page 3154](#)
- [Verification on page 3155](#)

### Requirements


Before you begin, configure IS-IS on both routers. See [“Example: Configuring IS-IS” on page 3121](#) for information about the required IS-IS configuration.

### Overview

In this example, a BFD authentication keychain is configured with meticulous keyed MD5 authentication.

[Figure 92 on page 3153](#) shows the topology used in this example.

**Figure 92: IS-IS BFD Authentication Topology**

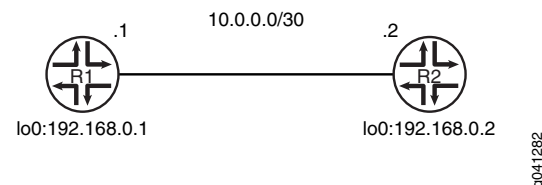

[“CLI Quick Configuration” on page 3154](#) shows the configuration for both of the devices in [Figure 92 on page 3153](#). The section [“Step-by-Step Procedure” on page 3154](#) describes the steps on Device R1.



## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```
set security authentication-key-chains key-chain secret123 description for-isis-bfd
set security authentication-key-chains key-chain secret123 key 1 secret "$9$cW-yrv"
set security authentication-key-chains key-chain secret123 key 1 start-time
  "2012-5-31.13:00:00 -0700"
set security authentication-key-chains key-chain secret123 key 2 secret "$9$m5T3"
set security authentication-key-chains key-chain secret123 key 2 start-time
  "2013-5-31.13:00:00 -0700"
set security authentication-key-chains key-chain secret123 key 3 secret "$9$mTQn"
set security authentication-key-chains key-chain secret123 key 3 start-time
  "2014-5-31.13:00:00 -0700"
set protocols isis interface ge-1/2/0.0 bfd-liveness-detection minimum-interval 100
set protocols isis interface ge-1/2/0.0 bfd-liveness-detection authentication key-chain
secret123
set protocols isis interface ge-1/2/0.0 bfd-liveness-detection authentication algorithm
meticulous-keyed-md5
```

**Device R2**

```
set security authentication-key-chains key-chain secret123 description for-isis-bfd
set security authentication-key-chains key-chain secret123 key 1 secret "$9$cW-yrv"
set security authentication-key-chains key-chain secret123 key 1 start-time
  "2012-5-31.13:00:00 -0700"
set security authentication-key-chains key-chain secret123 key 2 secret "$9$m5T3"
set security authentication-key-chains key-chain secret123 key 2 start-time
  "2013-5-31.13:00:00 -0700"
set security authentication-key-chains key-chain secret123 key 3 secret "$9$mTQn"
set security authentication-key-chains key-chain secret123 key 3 start-time
  "2014-5-31.13:00:00 -0700"
set protocols isis interface ge-1/2/0.0 bfd-liveness-detection minimum-interval 100
set protocols isis interface ge-1/2/0.0 bfd-liveness-detection authentication key-chain
secret123
set protocols isis interface ge-1/2/0.0 bfd-liveness-detection authentication algorithm
meticulous-keyed-md5
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure IS-IS BFD authentication:

1. Configure the authentication keychain.

```
[edit security authentication-key-chains key-chain secret123]
user@R1# set description for-isis-bfd
user@R1# set key 1 secret "$9$cW-yrv"
user@R1# set key 1 start-time "2012-5-31.13:00:00 -0700"
user@R1# set key 2 secret "$9$m5T3"
user@R1# set key 2 start-time "2013-5-31.13:00:00 -0700"
user@R1# set key 3 secret "$9$mTQn"
user@R1# set key 3 start-time "2014-5-31.13:00:00 -0700"
```



2. Enable BFD.
 

```
[edit protocols isis interface ge-1/2/0.0 bfd-liveness-detection]
user@R1# set minimum-interval 100
```
3. Apply the authentication keychain.
 

```
[edit protocols isis interface ge-1/2/0.0 bfd-liveness-detection]
user@R1# set authentication key-chain secret123
```
4. Set the authentication type.
 

```
[edit protocols isis interface ge-1/2/0.0 bfd-liveness-detection]
user@R1# set authentication algorithm meticulous-keyed-md5
```

**Results** From configuration mode, confirm your configuration by entering the **show protocols** and **show security** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show protocols
isis {
  interface ge-1/2/0.0 {
    bfd-liveness-detection {
      minimum-interval 100;
      authentication {
        key-chain secret123;
        algorithm meticulous-keyed-md5;
      }
    }
  }
}

user@R1# show security
authentication-key-chains {
  key-chain secret123 {
    description for-isis-bfd;
    key 1 {
      secret "$9$cW-yrv"; ## SECRET-DATA
      start-time "2012-5-31.13:00:00 -0700";
    }
    key 2 {
      secret "$9$m5T3"; ## SECRET-DATA
      start-time "2013-5-31.13:00:00 -0700";
    }
    key 3 {
      secret "$9$mTQn"; ## SECRET-DATA
      start-time "2014-5-31.13:00:00 -0700";
    }
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.



**Verifying IS-IS BFD Authentication**

**Purpose** Verify the status of IS-IS BFD authentication.

**Action** From operational mode, enter the **show bfd session extensive** command.

```
user@R1> show bfd session extensive
```

```

Address                State      Interface    Detect    Transmit
10.0.0.2                Down      ge-1/2/0.0   0.300    1.000    3
Client ISIS L1, TX interval 0.100, RX interval 0.100, Authenticate
    keychain secret123, algo meticulous-keyed-md5, mode strict
Client ISIS L2, TX interval 0.100, RX interval 0.100, Authenticate
    keychain secret123, algo meticulous-keyed-md5, mode strict
Session down time 00:35:13, previous up time 00:12:17
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Logical system 2, routing table index 85
Min async interval 0.100, min slow interval 1.000
Adaptive async TX interval 0.100, RX interval 0.100
Local min TX interval 1.000, minimum RX interval 0.100, multiplier 3
Remote min TX interval 0.100, min RX interval 0.100, multiplier 3
Local discriminator 2, remote discriminator 1
Echo mode disabled/inactive, no-absorb, no-refresh
Authentication enabled/active, keychain secret123, algo meticulous-keyed-md5,
mode strict
    Session ID: 0x100101

1 sessions, 2 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 10.0 pps
```

**Meaning** The output shows that BFD authentication is enabled on IS-IS Level 1 and Level 2.

**Related Documentation**

- [Configuring BFD Authentication for IS-IS](#)
- [Example: Configuring BFD for IS-IS](#)

**Example: Configuring IS-IS Multicast Topology**

- [IS-IS Multicast Topologies Overview on page 3157](#)
- [Example: Configuring IS-IS Multicast Topology on page 3158](#)



### IS-IS Multicast Topologies Overview

Most multicast routing protocols perform a reverse-path forwarding (RPF) check on the source of multicast data packets. If a packet comes in on the interface that is used to send data to the source, the packet is accepted and forwarded to one or more downstream interfaces. Otherwise, the packet is discarded and a notification is sent to the multicast routing protocol running on the interface.

In certain instances, the unicast routing table used for the RPF check is also the table used for forwarding unicast data packets. Thus, unicast and multicast routing are congruent. In other cases, where it is preferred that multicast routing be independent of unicast routing, the multicast routing protocols are configured to perform the RPF check using an alternate unicast routing table `inet.2`.

You can configure IS-IS to calculate an alternate IPv4 multicast topology, in addition to the normal IPv4 unicast topology, and add the corresponding routes to `inet.2`. The IS-IS interface metrics for the multicast topology can be configured independently of the unicast metrics. You can also selectively disable interfaces from participating in the multicast topology while continuing to participate in the regular unicast topology. This enables you to exercise control over the paths that multicast data takes through a network so that it is independent of unicast data paths. You can also configure IS-IS to calculate an alternate IPv6 multicast topology, in addition to the normal IPv6 unicast topology.



**NOTE:** IS-IS only starts advertising the routes when the interface routes are in `inet.2`.

Table 210 on page 3157 lists the various IPv4 statements you can use to configure IS-IS topologies.

**Table 210: IPv4 Statements**

Statement	Description
<code>ipv4-multicast</code>	Enables an alternate IPv4 multicast topology.
<code>ipv4-multicast-metric</code> <i>number</i>	Configures the multicast metric for an alternate IPv4 multicast topology.
<code>no-ipv4-multicast</code>	Excludes an interface from the IPv4 multicast topology.
<code>no-unicast-topology</code>	Excludes an interface from the IPv4 unicast topologies.

Table 211 on page 3157 lists the various IPv6 statements you can use to configure IS-IS topologies.

**Table 211: IPv6 Statements**

Statement	Description
<code>ipv6-multicast</code>	Enables an alternate IPv6 multicast topology.



Table 211: IPv6 Statements (*continued*)

Statement	Description
<code>ipv6-multicast-metric <i>number</i></code>	Configures the multicast metric for an alternate IPv6 multicast topology.
<code>ipv6-unicast-metric <i>number</i></code>	Configures the unicast metric for an alternate IPv6 multicast topology.
<code>no-ipv6-multicast</code>	Excludes an interface from the IPv6 multicast topology.
<code>no-ipv6-unicast</code>	Excludes an interface from the IPv6 unicast topologies.

For a list of hierarchy levels at which you can include these statements, see the statement summary sections for these statements.

#### Example: Configuring IS-IS Multicast Topology

This example shows how to configure a multicast topology for an IS-IS network.

- [Requirements on page 3158](#)
- [Overview on page 3158](#)
- [Configuration on page 3159](#)
- [Verification on page 3163](#)

#### **Requirements**

Before you begin, configure IS-IS on all routers. See [“Example: Configuring IS-IS” on page 3121](#) for information about the required IS-IS configuration.

This example uses the following hardware and software components:

- Junos OS Release 7.3 or later
- M Series, MX Series, and T Series routers


#### **Overview**

This example shows an IS-IS multicast topology configuration. Three routers are connected to each other. A loopback interface is configured on each router.

[Figure 93 on page 3159](#) shows the sample network.



Figure 93: Configuring IS-IS Multicast Topology

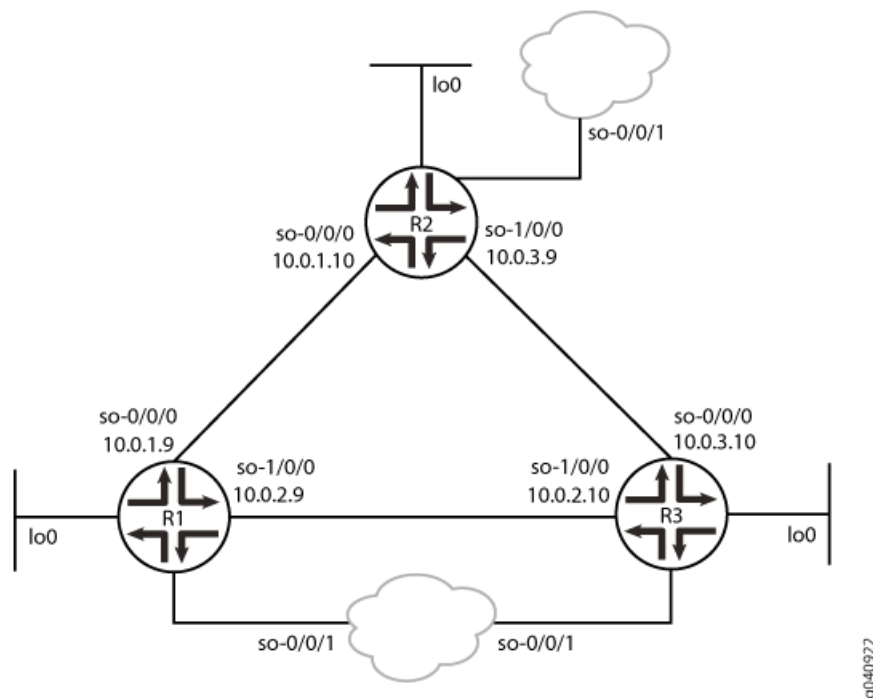

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

#### Router R1

```
set protocols isis traceoptions file isis size 5m world-readable
set protocols isis traceoptions flag error
set protocols isis topologies ipv4-multicast
set protocols isis interface so-0/0/0 level 1 metric 15
set protocols isis interface so-0/0/0 level 1 ipv4-multicast-metric 18
set protocols isis interface so-0/0/0 level 2 metric 20
set protocols isis interface so-0/0/0 level 2 ipv4-multicast-metric 14
set protocols isis interface so-1/0/0 level 1 metric 13
set protocols isis interface so-1/0/0 level 1 ipv4-multicast-metric 12
set protocols isis interface so-1/0/0 level 2 metric 29
set protocols isis interface so-1/0/0 level 2 ipv4-multicast-metric 23
set protocols isis interface fxp0.0 disable
```

#### Router R2

```
set protocols isis traceoptions file isis size 5m world-readable
set protocols isis traceoptions flag error
set protocols isis topologies ipv4-multicast
set protocols isis interface so-0/0/0 level 1 metric 13
set protocols isis interface so-0/0/0 level 1 ipv4-multicast-metric 12
set protocols isis interface so-0/0/0 level 2 metric 29
```



```
set protocols isis interface so-0/0/0 level 2 ipv4-multicast-metric 23
set protocols isis interface so-1/0/0 level 1 metric 14
set protocols isis interface so-1/0/0 level 1 ipv4-multicast-metric 18
set protocols isis interface so-1/0/0 level 2 metric 32
set protocols isis interface so-1/0/0 level 2 ipv4-multicast-metric 26
set protocols isis interface fxp0.0 disable
```

#### Router R3

```
set protocols isis traceoptions file isis size 5m world-readable
set protocols isis traceoptions flag error
set protocols isis topologies ipv4-multicast
set protocols isis interface so-0/0/0 level 1 metric 19
set protocols isis interface so-0/0/0 level 1 ipv4-multicast-metric 11
set protocols isis interface so-0/0/0 level 2 metric 27
set protocols isis interface so-0/0/0 level 2 ipv4-multicast-metric 21
set protocols isis interface so-1/0/0 level 1 metric 16
set protocols isis interface so-1/0/0 level 1 ipv4-multicast-metric 26
set protocols isis interface so-1/0/0 level 2 metric 30
set protocols isis interface so-1/0/0 level 2 ipv4-multicast-metric 20
set protocols isis interface fxp0.0 disable
```

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure IS-IS multicast topologies:

1. Enable the multicast topology for IS-IS by using the **ipv4-multicast** statement.

#### Routers R1, R2, and R3

```
[edit protocols isis]
user@host# set traceoptions file isis size 5m world-readable
user@host# set traceoptions flag error
user@host# set topologies ipv4-multicast
```

2. Enable multicast metrics on the first SONET/SDH Interface by using the **ipv4-multicast-metric** statement.

#### Router R1

```
[edit protocols isis interface so-0/0/0 ]
user@R1# set level 1 metric 15
user@R1# set level 1 ipv4-multicast-metric 18
user@R1# set level 2 metric 20
user@R1# set level 2 ipv4-multicast-metric 14
```

#### Router R2

```
[edit protocols isis interface so-0/0/0]
user@R2# set level 1 metric 13
user@R2# set level 1 ipv4-multicast-metric 12
user@R2# set level 2 metric 29
user@R2# set level 2 ipv4-multicast-metric 23
```

#### Router R3

```
[edit protocols isis interface so-0/0/0]
```



```

user@R3# set level 1 metric 19
user@R3# set level 1 ipv4-multicast-metric 11
user@R3# set level 2 metric 27
user@R3# set level 2 ipv4-multicast-metric 21

```

3. Enable multicast metrics on a second sonet Interface by using the **ipv4-multicast-metric** statement.

#### Router R1

```

[edit protocols isis interface so-1/0/0]
user@R1# set level 1 metric 13
user@R1# set level 1 ipv4-multicast-metric 12
user@R1# set level 2 metric 29
user@R1# set level 2 ipv4-multicast-metric 23

```

#### Router R2

```

[edit protocols isis interface so-1/0/0]
user@R2# set level 1 metric 14
user@R2# set level 1 ipv4-multicast-metric 18
user@R2# set level 2 metric 32
user@R2# set level 2 ipv4-multicast-metric 26

```

#### Router R3

```

[edit protocols isis interface so-1/0/0]
user@R3# set level 1 metric 16
user@R3# set level 1 ipv4-multicast-metric 26
user@R3# set level 2 metric 30
user@R3# set level 2 ipv4-multicast-metric 20

```

4. Disable the out-of-band management port, fxp0.

#### Routers R1, R2, and R3

```

[edit protocols isis]
user@host# set interface fxp0.0 disable

```

5. If you are done configuring the routers, commit the configuration.

#### Routers R1, R2, and R3

```

[edit]
user@host# commit

```

**Results** From configuration mode, confirm your configuration by using the **show protocols isis** statement. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

#### Router R1

```

user@R1# show protocols isis

traceoptions {
  file isis size 5m world-readable;
  flag error;
}
topologies ipv4-multicast;
interface so-0/0/0 {
  level 1 {

```



```
        metric 15;
        ipv4-multicast-metric 18;
    }
    level 2 {
        metric 20;
        ipv4-multicast-metric 14;
    }
}
interface so-1/0/0 {
    level 1 {
        metric 13;
        ipv4-multicast-metric 12;
    }
    level 2 {
        metric 29;
        ipv4-multicast-metric 23;
    }
}
interface fxp0.0 {
    disable;
}
```

#### Router R2

user@R2# show protocols isis

```
traceoptions {
    file isis size 5m world-readable;
    flag error;
}
topologies ipv4-multicast;
interface so-0/0/0 {
    level 1 {
        metric 13;
        ipv4-multicast-metric 12;
    }
    level 2 {
        metric 29;
        ipv4-multicast-metric 23;
    }
}
interface so-1/0/0 {
    level 1 {
        metric 14;
        ipv4-multicast-metric 18;
    }
    level 2 {
        metric 32;
        ipv4-multicast-metric 26;
    }
}
interface fxp0.0 {
    disable;
}
```

#### Router R3

user@R3# show protocols isis

```
traceoptions {
    file isis size 5m world-readable;
    flag error;
```



```

}
topologies ipv4-multicast;
interface so-0/0/0 {
    level 1 {
        metric 19;
        ipv4-multicast-metric 11;
    }
    level 2 {
        metric 27;
        ipv4-multicast-metric 21;
    }
}
interface so-1/0/0 {
    level 1 {
        metric 16;
        ipv4-multicast-metric 26;
    }
    level 2 {
        metric 30;
        ipv4-multicast-metric 20;
    }
}
interface fxp0.0 {
    disable;
}

```

### Verification

Confirm that the configuration is working properly.

- [Verifying the Connection Between Routers R1, R2, and R3 on page 3163](#)
- [Verifying That IS-IS Is Configured on page 3165](#)
- [Verifying the Configured Multicast Metric Values on page 3167](#)
- [Verifying the Configuration of the Multicast Topology on page 3168](#)

### Verifying the Connection Between Routers R1, R2, and R3

**Purpose** Make sure that Routers R1, R2, and R3 are connected to each other.

**Action** Ping the other two routers from any router, to check the connectivity between the three routers as per the network topology.

```
user@R1> ping 10.0.3.9
```

```

PING 10.0.3.9 (10.0.3.9): 56 data bytes
64 bytes from 10.0.3.9: icmp_seq=0 ttl=64 time=1.299 ms
64 bytes from 10.0.3.9: icmp_seq=1 ttl=64 time=52.304 ms
64 bytes from 10.0.3.9: icmp_seq=2 ttl=64 time=1.271 ms
64 bytes from 10.0.3.9: icmp_seq=3 ttl=64 time=1.343 ms
64 bytes from 10.0.3.9: icmp_seq=4 ttl=64 time=1.434 ms
64 bytes from 10.0.3.9: icmp_seq=5 ttl=64 time=1.306 ms
^C
--- 10.0.3.9 ping statistics ---
6 packets transmitted, 6 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.271/9.826/52.304/18.997 ms

```

```
user@R1> ping 10.0.3.10
```



```
PING 10.0.3.10 (10.0.3.10): 56 data bytes
64 bytes from 10.0.3.10: icmp_seq=0 ttl=64 time=1.431 ms
64 bytes from 10.0.3.10: icmp_seq=1 ttl=64 time=1.296 ms
64 bytes from 10.0.3.10: icmp_seq=2 ttl=64 time=1.887 ms
^C
--- 10.0.3.10 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.296/1.538/1.887/0.253 ms
```

```
user@R2> ping 10.0.2.9
```

```
PING 10.0.2.9 (10.0.2.9): 56 data bytes
64 bytes from 10.0.2.9: icmp_seq=0 ttl=64 time=1.365 ms
64 bytes from 10.0.2.9: icmp_seq=1 ttl=64 time=1.813 ms
64 bytes from 10.0.2.9: icmp_seq=2 ttl=64 time=1.290 ms
^C
--- 10.0.2.9 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.290/1.489/1.813/0.231 ms
```

```
user@R2> ping 10.0.2.10
```

```
PING 10.0.2.10 (10.0.2.10): 56 data bytes
64 bytes from 10.0.2.10: icmp_seq=0 ttl=63 time=1.318 ms
64 bytes from 10.0.2.10: icmp_seq=1 ttl=63 time=1.394 ms
64 bytes from 10.0.2.10: icmp_seq=2 ttl=63 time=1.366 ms
64 bytes from 10.0.2.10: icmp_seq=3 ttl=63 time=1.305 ms
^C
--- 10.0.2.10 ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.305/1.346/1.394/0.036 ms
```

```
user@R3> ping 10.0.1.10
```

```
PING 10.0.1.10 (10.0.1.10): 56 data bytes
64 bytes from 10.0.1.10: icmp_seq=0 ttl=63 time=1.316 ms
64 bytes from 10.0.1.10: icmp_seq=1 ttl=63 time=1.418 ms
64 bytes from 10.0.1.10: icmp_seq=2 ttl=63 time=1.277 ms
^C
--- 10.0.1.10 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.277/1.337/1.418/0.059 ms
```

```
user@R3> ping 10.0.1.9
```

```
PING 10.0.1.9 (10.0.1.9): 56 data bytes
64 bytes from 10.0.1.9: icmp_seq=0 ttl=64 time=1.381 ms
64 bytes from 10.0.1.9: icmp_seq=1 ttl=64 time=1.499 ms
64 bytes from 10.0.1.9: icmp_seq=2 ttl=64 time=1.300 ms
64 bytes from 10.0.1.9: icmp_seq=3 ttl=64 time=1.397 ms
^C
--- 10.0.1.9 ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.300/1.394/1.499/0.071 ms
```

**Meaning** Routers R1, R2, and R3 have a peer relationship with each other.



**Verifying That IS-IS Is Configured**

**Purpose** Make sure that the IS-IS instance is running on Routers R1, R2, and R3, and that they are adjacent to each other.

**Action** Use the **show isis adjacency detail** command to check the adjacency between the routers.

**Router R1**

```
user@R1> show isis adjacency detail
```

R2

```
Interface: so-0/0/0, Level: 1, State: Up, Expires in 8 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:23:59 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.1.10
```

R2

```
Interface: so-0/0/0, Level: 2, State: Up, Expires in 8 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:23:58 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.1.10
```

R3

```
Interface: so-1/0/0, Level: 1, State: Up, Expires in 7 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:24:20 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.02, IP addresses: 10.0.2.10
```

R3

```
Interface: so-1/0/0, Level: 2, State: Up, Expires in 6 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:24:20 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.02, IP addresses: 10.0.2.10
```

**Router R2**

```
user@R2> show isis adjacency detail
```

R1

```
Interface: so-0/0/0, Level: 1, State: Up, Expires in 20 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:27:50 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.1.9
```

R1

```
Interface: so-0/0/0, Level: 2, State: Up, Expires in 26 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:27:50 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc
Topologies: IPV4-Multicast
```



Restart capable: Yes, Adjacency advertisement: Advertise  
LAN id: R2.02, IP addresses: 10.0.1.9

R3

Interface: so-1/0/0, Level: 1, State: Up, Expires in 8 secs  
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:27:22 ago  
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd  
Topologies: IPV4-Multicast  
Restart capable: Yes, Adjacency advertisement: Advertise  
LAN id: R3.03, IP addresses: 10.0.3.10

R3

Interface: so-1/0/0, Level: 2, State: Up, Expires in 8 secs  
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:27:22 ago  
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd  
Topologies: IPV4-Multicast  
Restart capable: Yes, Adjacency advertisement: Advertise  
LAN id: R3.03, IP addresses: 10.0.3.10

### Router R3

user@R3> show isis adjacency detail

R2

Interface: so-0/0/0, Level: 1, State: Up, Expires in 18 secs  
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:33:09 ago  
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc  
Topologies: IPV4-Multicast  
Restart capable: Yes, Adjacency advertisement: Advertise  
LAN id: R3.03, IP addresses: 10.0.3.9

R2

Interface: so-0/0/0, Level: 2, State: Up, Expires in 22 secs  
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:33:09 ago  
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc  
Topologies: IPV4-Multicast  
Restart capable: Yes, Adjacency advertisement: Advertise  
LAN id: R3.03, IP addresses: 10.0.3.9

R1

Interface: so-1/0/0, Level: 1, State: Up, Expires in 21 secs  
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:33:59 ago  
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc  
Topologies: IPV4-Multicast  
Restart capable: Yes, Adjacency advertisement: Advertise  
LAN id: R3.02, IP addresses: 10.0.2.9

R1

Interface: so-1/0/0, Level: 2, State: Up, Expires in 19 secs  
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:33:59 ago  
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc  
Topologies: IPV4-Multicast  
Restart capable: Yes, Adjacency advertisement: Advertise  
LAN id: R3.02, IP addresses: 10.0.2.9

**Meaning** IS-IS is configured on Routers R1, R2, and R3, and they are adjacent to each other.



**Verifying the Configured Multicast Metric Values**

**Purpose** Make sure that the SPF calculations are accurate as per the configured multicast metric values on Routers R1, R2, and R3.

**Action** Use the **show isis spf results** command to check the SPF calculations for the network.

**Router R1**

```
user@R1> show isis spf results
```

```
...
IPv4 Multicast IS-IS level 1 SPF results:
Node  Metric  Interface  NH  Via  SNPA
R3.03  28         so-1/0/0   IPV4 R3  0:1b:c0:86:54:bd
R2.00  18         so-0/0/0   IPV4 R2  0:1b:c0:86:54:bd
R3.00  17         so-1/0/0   IPV4 R3  0:1b:c0:86:54:bd
R1.00  0
      4 nodes
```

```
IPv4 Multicast IS-IS level 2 SPF results:
Node  Metric  Interface  NH  Via  SNPA
R3.03  40         so-0/0/0   IPV4 R2  0:1b:c0:86:54:bd
R3.00  22         so-1/0/0   IPV4 R3  0:1b:c0:86:54:bd
R2.00  14         so-0/0/0   IPV4 R2  0:1b:c0:86:54:bd
R1.00  0
      4 nodes
```

**Router R2**

```
user@R2> show isis spf results
```

```
...
IPv4 Multicast IS-IS level 1 SPF results:
Node  Metric  Interface  NH  Via  SNPA
R3.02  29         so-0/0/0   IPV4 R1  0:1b:c0:86:54:bc
R3.00  18         so-1/0/0   IPV4 R3  0:1b:c0:86:54:bd
R1.00  12         so-0/0/0   IPV4 R1  0:1b:c0:86:54:bc
R2.02  12
R2.00  0
      5 nodes
```

```
IPv4 Multicast IS-IS level 2 SPF results:
Node  Metric  Interface  NH  Via  SNPA
R3.02  45         so-0/0/0   IPV4 R1  0:1b:c0:86:54:bc
R3.00  26         so-1/0/0   IPV4 R3  0:1b:c0:86:54:bd
R1.00  23         so-0/0/0   IPV4 R1  0:1b:c0:86:54:bc
R2.02  23
R2.00  0
      5 nodes
```

**Router R3**

```
user@R3> show isis spf results
```

```
...
IPv4 Multicast IS-IS level 1 SPF results:
Node  Metric  Interface  NH  Via  SNPA
R3.02  26
R1.00  23         so-0/0/0   IPV4 R2  0:1b:c0:86:54:bc
R2.02  23         so-0/0/0   IPV4 R2  0:1b:c0:86:54:bc
R2.00  11         so-0/0/0   IPV4 R2  0:1b:c0:86:54:bc
R3.03  11
```



```

R3.00 0
      6 nodes

IPv4 Multicast IS-IS level 2 SPF results:
Node Metric Interface NH Via SNPA
R2.02 34 so-1/0/0 IPv4 R1 0:1b:c0:86:54:bc
R2.00 21 so-0/0/0 IPv4 R2 0:1b:c0:86:54:bc
R3.03 21
R1.00 20 so-1/0/0 IPv4 R1 0:1b:c0:86:54:bc
R3.02 20
R3.00 0
      6 nodes

```

**Meaning** The configured multicast metric values are used in SPF calculations for the IS-IS network.

### *Verifying the Configuration of the Multicast Topology*

**Purpose** Make sure that the multicast topology is configured on Routers R1, R2, and R3.

**Action** Use the **show isis database detail** command to verify the multicast topology configuration on the routers.

#### **Router R1**

```
user@R1> show isis database detail
```

```
IS-IS level 1 link-state database:
```

```

R1.00-00 Sequence: 0x142, Checksum: 0xd07, Lifetime: 663 secs
  IPv4 Unicast IS neighbor: R2.02 Metric: 15
  IPv4 Unicast IS neighbor: R3.02 Metric: 15
  IPv4 Multicast IS neighbor: R2.02 Metric: 18
  IPv4 Multicast IS neighbor: R3.02 Metric: 17
  IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 15 Internal Up
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 15 Internal Up

```

```

R2.00-00 Sequence: 0x13f, Checksum: 0xf02b, Lifetime: 883 secs
  IPv4 Unicast IS neighbor: R2.02 Metric: 13
  IPv4 Unicast IS neighbor: R3.03 Metric: 14
  IPv4 Multicast IS neighbor: R2.02 Metric: 12
  IPv4 Multicast IS neighbor: R3.03 Metric: 18
  IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 13 Internal Up
  IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 14 Internal Up

```

```

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 913 secs
  IPv4 Unicast IS neighbor: R1.00 Metric: 0
  IPv4 Unicast IS neighbor: R2.00 Metric: 0

```

```

R3.00-00 Sequence: 0x13c, Checksum: 0xc8de, Lifetime: 488 secs
  IPv4 Unicast IS neighbor: R3.02 Metric: 16
  IPv4 Unicast IS neighbor: R3.03 Metric: 19
  IPv4 Multicast IS neighbor: R3.02 Metric: 26
  IPv4 Multicast IS neighbor: R3.03 Metric: 11
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 16 Internal Up
  IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 19 Internal Up

```

```

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 625 secs
  IPv4 Unicast IS neighbor: R1.00 Metric: 0
  IPv4 Unicast IS neighbor: R3.00 Metric: 0

```



```
R3.03-00 Sequence: 0x138, Checksum: 0xad56, Lifetime: 714 secs
  IPv4 Unicast IS neighbor: R2.00 Metric: 0
  IPv4 Unicast IS neighbor: R3.00 Metric: 0
```

IS-IS level 2 link-state database:

```
R1.00-00 Sequence: 0x142, Checksum: 0x2c7c, Lifetime: 816 secs
  IPv4 Unicast IS neighbor: R2.02 Metric: 20
  IPv4 Unicast IS neighbor: R3.02 Metric: 31
  IPv4 Multicast IS neighbor: R2.02 Metric: 14
  IPv4 Multicast IS neighbor: R3.02 Metric: 22
  IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 20 Internal Up
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 31 Internal Up
  IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 29 Internal Up
```

```
R2.00-00 Sequence: 0x13f, Checksum: 0x4826, Lifetime: 966 secs
  IPv4 Unicast IS neighbor: R2.02 Metric: 29
  IPv4 Unicast IS neighbor: R3.03 Metric: 32
  IPv4 Multicast IS neighbor: R2.02 Metric: 23
  IPv4 Multicast IS neighbor: R3.03 Metric: 26
  IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 29 Internal Up
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 28 Internal Up
  IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 32 Internal Up
```

```
R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 966 secs
  IPv4 Unicast IS neighbor: R1.00 Metric: 0
  IPv4 Unicast IS neighbor: R2.00 Metric: 0
```

```
R3.00-00 Sequence: 0x13d, Checksum: 0x1b19, Lifetime: 805 secs
  IPv4 Unicast IS neighbor: R3.02 Metric: 30
  IPv4 Unicast IS neighbor: R3.03 Metric: 27
  IPv4 Multicast IS neighbor: R3.02 Metric: 20
  IPv4 Multicast IS neighbor: R3.03 Metric: 21
  IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 31 Internal Up
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 30 Internal Up
  IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 27 Internal Up
```

```
R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 844 secs
  IPv4 Unicast IS neighbor: R1.00 Metric: 0
  IPv4 Unicast IS neighbor: R3.00 Metric: 0
```

```
R3.03-00 Sequence: 0x139, Checksum: 0xab57, Lifetime: 844 secs
  IPv4 Unicast IS neighbor: R2.00 Metric: 0
  IPv4 Unicast IS neighbor: R3.00 Metric: 0
```

## Router R2

```
user@R2> show isis database detail
```

IS-IS level 1 link-state database:

```
R1.00-00 Sequence: 0x142, Checksum: 0xd07, Lifetime: 524 secs
  IPv4 Unicast IS neighbor: R2.02 Metric: 15
  IPv4 Unicast IS neighbor: R3.02 Metric: 15
  IPv4 Multicast IS neighbor: R2.02 Metric: 18
  IPv4 Multicast IS neighbor: R3.02 Metric: 17
  IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 15 Internal Up
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 15 Internal Up
```

```
R2.00-00 Sequence: 0x13f, Checksum: 0xf02b, Lifetime: 748 secs
  IPv4 Unicast IS neighbor: R2.02 Metric: 13
```



```
IPV4 Unicast IS neighbor: R3.03      Metric:      14
IPV4 Multicast IS neighbor: R2.02     Metric:      12
IPV4 Multicast IS neighbor: R3.03     Metric:      18
IP IPV4 Unicast prefix: 10.0.1.8/30   Metric:      13 Internal Up
IP IPV4 Unicast prefix: 10.0.3.8/30   Metric:      14 Internal Up

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 777 secs
IPV4 Unicast IS neighbor: R1.00      Metric:      0
IPV4 Unicast IS neighbor: R2.00      Metric:      0

R3.00-00 Sequence: 0x13d, Checksum: 0xc6df, Lifetime: 1102 secs
IPV4 Unicast IS neighbor: R3.02      Metric:      16
IPV4 Unicast IS neighbor: R3.03      Metric:      19
IPV4 Multicast IS neighbor: R3.02     Metric:      26
IPV4 Multicast IS neighbor: R3.03     Metric:      11
IP IPV4 Unicast prefix: 10.0.2.8/30   Metric:      16 Internal Up
IP IPV4 Unicast prefix: 10.0.3.8/30   Metric:      19 Internal Up

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 488 secs
IPV4 Unicast IS neighbor: R1.00      Metric:      0
IPV4 Unicast IS neighbor: R3.00      Metric:      0

R3.03-00 Sequence: 0x138, Checksum: 0xad56, Lifetime: 577 secs
IPV4 Unicast IS neighbor: R2.00      Metric:      0
IPV4 Unicast IS neighbor: R3.00      Metric:      0

IS-IS level 2 link-state database:

R1.00-00 Sequence: 0x142, Checksum: 0x2c7c, Lifetime: 676 secs
IPV4 Unicast IS neighbor: R2.02      Metric:      20
IPV4 Unicast IS neighbor: R3.02      Metric:      31
IPV4 Multicast IS neighbor: R2.02     Metric:      14
IPV4 Multicast IS neighbor: R3.02     Metric:      22
IP IPV4 Unicast prefix: 10.0.1.8/30   Metric:      20 Internal Up
IP IPV4 Unicast prefix: 10.0.2.8/30   Metric:      31 Internal Up
IP IPV4 Unicast prefix: 10.0.3.8/30   Metric:      29 Internal Up

R2.00-00 Sequence: 0x13f, Checksum: 0x4826, Lifetime: 831 secs
IPV4 Unicast IS neighbor: R2.02      Metric:      29
IPV4 Unicast IS neighbor: R3.03      Metric:      32
IPV4 Multicast IS neighbor: R2.02     Metric:      23
IPV4 Multicast IS neighbor: R3.03     Metric:      26
IP IPV4 Unicast prefix: 10.0.1.8/30   Metric:      29 Internal Up
IP IPV4 Unicast prefix: 10.0.2.8/30   Metric:      28 Internal Up
IP IPV4 Unicast prefix: 10.0.3.8/30   Metric:      32 Internal Up

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 831 secs
IPV4 Unicast IS neighbor: R1.00      Metric:      0
IPV4 Unicast IS neighbor: R2.00      Metric:      0

R3.00-00 Sequence: 0x13d, Checksum: 0x1b19, Lifetime: 667 secs
IPV4 Unicast IS neighbor: R3.02      Metric:      30
IPV4 Unicast IS neighbor: R3.03      Metric:      27
IPV4 Multicast IS neighbor: R3.02     Metric:      20
IPV4 Multicast IS neighbor: R3.03     Metric:      21
IP IPV4 Unicast prefix: 10.0.1.8/30   Metric:      31 Internal Up
IP IPV4 Unicast prefix: 10.0.2.8/30   Metric:      30 Internal Up
IP IPV4 Unicast prefix: 10.0.3.8/30   Metric:      27 Internal Up

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 707 secs
IPV4 Unicast IS neighbor: R1.00      Metric:      0
```



```
IPV4 Unicast IS neighbor: R3.00    Metric:      0
```

```
R3.03-00 Sequence: 0x139, Checksum: 0xab57, Lifetime: 707 secs
```

```
IPV4 Unicast IS neighbor: R2.00    Metric:      0
```

```
IPV4 Unicast IS neighbor: R3.00    Metric:      0
```

### Router R3

```
user@R3> show isis database detail
```

```
IS-IS level 1 link-state database:
```

```
R1.00-00 Sequence: 0x143, Checksum: 0xb08, Lifetime: 1155 secs
```

```
IPV4 Unicast IS neighbor: R2.02    Metric:      15
```

```
IPV4 Unicast IS neighbor: R3.02    Metric:      15
```

```
IPV4 Multicast IS neighbor: R2.02   Metric:      18
```

```
IPV4 Multicast IS neighbor: R3.02   Metric:      17
```

```
IP IPV4 Unicast prefix: 10.0.1.8/30 Metric:      15 Internal Up
```

```
IP IPV4 Unicast prefix: 10.0.2.8/30 Metric:      15 Internal Up
```

```
R2.00-00 Sequence: 0x13f, Checksum: 0xf02b, Lifetime: 687 secs
```

```
IPV4 Unicast IS neighbor: R2.02    Metric:      13
```

```
IPV4 Unicast IS neighbor: R3.03    Metric:      14
```

```
IPV4 Multicast IS neighbor: R2.02   Metric:      12
```

```
IPV4 Multicast IS neighbor: R3.03   Metric:      18
```

```
IP IPV4 Unicast prefix: 10.0.1.8/30 Metric:      13 Internal Up
```

```
IP IPV4 Unicast prefix: 10.0.3.8/30 Metric:      14 Internal Up
```

```
R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 716 secs
```

```
IPV4 Unicast IS neighbor: R1.00    Metric:      0
```

```
IPV4 Unicast IS neighbor: R2.00    Metric:      0
```

```
R3.00-00 Sequence: 0x13d, Checksum: 0xc6df, Lifetime: 1044 secs
```

```
IPV4 Unicast IS neighbor: R3.02    Metric:      16
```

```
IPV4 Unicast IS neighbor: R3.03    Metric:      19
```

```
IPV4 Multicast IS neighbor: R3.02   Metric:      26
```

```
IPV4 Multicast IS neighbor: R3.03   Metric:      11
```

```
IP IPV4 Unicast prefix: 10.0.2.8/30 Metric:      16 Internal Up
```

```
IP IPV4 Unicast prefix: 10.0.3.8/30 Metric:      19 Internal Up
```

```
R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 430 secs
```

```
IPV4 Unicast IS neighbor: R1.00    Metric:      0
```

```
IPV4 Unicast IS neighbor: R3.00    Metric:      0
```

```
R3.03-00 Sequence: 0x138, Checksum: 0xad56, Lifetime: 519 secs
```

```
IPV4 Unicast IS neighbor: R2.00    Metric:      0
```

```
IPV4 Unicast IS neighbor: R3.00    Metric:      0
```

```
IS-IS level 2 link-state database:
```

```
R1.00-00 Sequence: 0x142, Checksum: 0x2c7c, Lifetime: 617 secs
```

```
IPV4 Unicast IS neighbor: R2.02    Metric:      20
```

```
IPV4 Unicast IS neighbor: R3.02    Metric:      31
```

```
IPV4 Multicast IS neighbor: R2.02   Metric:      14
```

```
IPV4 Multicast IS neighbor: R3.02   Metric:      22
```

```
IP IPV4 Unicast prefix: 10.0.1.8/30 Metric:      20 Internal Up
```

```
IP IPV4 Unicast prefix: 10.0.2.8/30 Metric:      31 Internal Up
```

```
IP IPV4 Unicast prefix: 10.0.3.8/30 Metric:      29 Internal Up
```

```
R2.00-00 Sequence: 0x13f, Checksum: 0x4826, Lifetime: 769 secs
```

```
IPV4 Unicast IS neighbor: R2.02    Metric:      29
```

```
IPV4 Unicast IS neighbor: R3.03    Metric:      32
```



```
IPV4 Multicast IS neighbor: R2.02 Metric: 23
IPV4 Multicast IS neighbor: R3.03 Metric: 26
IP IPV4 Unicast prefix: 10.0.1.8/30 Metric: 29 Internal Up
IP IPV4 Unicast prefix: 10.0.2.8/30 Metric: 28 Internal Up
IP IPV4 Unicast prefix: 10.0.3.8/30 Metric: 32 Internal Up

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 769 secs
IPV4 Unicast IS neighbor: R1.00 Metric: 0
IPV4 Unicast IS neighbor: R2.00 Metric: 0

R3.00-00 Sequence: 0x13d, Checksum: 0x1b19, Lifetime: 610 secs
IPV4 Unicast IS neighbor: R3.02 Metric: 30
IPV4 Unicast IS neighbor: R3.03 Metric: 27
IPV4 Multicast IS neighbor: R3.02 Metric: 20
IPV4 Multicast IS neighbor: R3.03 Metric: 21
IP IPV4 Unicast prefix: 10.0.1.8/30 Metric: 31 Internal Up
IP IPV4 Unicast prefix: 10.0.2.8/30 Metric: 30 Internal Up
IP IPV4 Unicast prefix: 10.0.3.8/30 Metric: 27 Internal Up

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 649 secs
IPV4 Unicast IS neighbor: R1.00 Metric: 0
IPV4 Unicast IS neighbor: R3.00 Metric: 0

R3.03-00 Sequence: 0x139, Checksum: 0xab57, Lifetime: 649 secs
IPV4 Unicast IS neighbor: R2.00 Metric: 0
IPV4 Unicast IS neighbor: R3.00 Metric: 0
```

**Meaning** Multicast topology is configured on Routers R1, R2, and R3.

**Related Documentation**

- [Example: Configuring Multitopology Routing Based on a Multicast Source](#)
- [Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies](#)

## Example: Configuring IS-IS for CLNS

- [Understanding IS-IS for CLNS on page 3172](#)
- [Example: Configuring IS-IS for CLNS on page 3172](#)

### Understanding IS-IS for CLNS

---

IS-IS extensions provide the basic interior gateway protocol (IGP) support for collecting intradomain routing information for Connectionless Network Service (CLNS) destinations within a CLNS network. Routers that learn host addresses through End System-to-Intermediate System (ES-IS) can advertise the addresses to other routers (intermediate systems) by using IS-IS.

For more information about IS-IS, see the ISO 10589 standard.

### Example: Configuring IS-IS for CLNS

---

This example shows how to create a routing instance and enable the IS-IS protocol on all interfaces.

- [Requirements on page 3173](#)
- [Overview on page 3173](#)



- [Configuration on page 3173](#)
- [Verification on page 3174](#)

### Requirements

Before you begin, configure the network interfaces. See the *Junos OS Interfaces Configuration Guide for Security Devices*.

### Overview

The configuration instructions in this topic describe how to create a routing instance called `aaaa`, enable IS-IS on all interfaces, define the BGP export policy name (`dist-bgp`), family (`ISO`), and protocol (`BGP`), and apply the export policy to IS-IS.

### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set routing-instances aaaa protocols isis clns-routing
set routing-instances aaaa protocols isis interface all
set routing-instances aaaa protocols isis no-ipv4-routing no-ipv6-routing
set policy-options policy-statement dist-bgp from family iso protocol bgp
set policy-options policy-statement dist-bgp then accept
set routing-instances aaaa protocols isis export dist-bgp
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure IS-IS for CLNS:

1. Enable CLNS routing.  

```
[edit routing-instances aaaa]
user@host# set protocols isis clns-routing
```
2. Enable IS-IS on all interfaces.  

```
[edit routing-instances aaaa]
user@host# set protocols isis interface all
```
3. (Optional) Disable IPv4 and IPv6 routing to configure a pure CLNS network.  

```
[edit routing-instances aaaa]
user@host# set protocols isis no-ipv4-routing no-ipv6-routing
```
4. Define the BGP export policy name, family, and protocol.  

```
[edit policy-options]
user@host# set policy-statement dist-bgp from family iso protocol bgp
```
5. Define the action for the export policy.  

```
[edit policy-options]
user@host# set policy-statement dist-bgp then accept
```



6. Apply the export policy to IS-IS.

```
[edit routing-instances aaaa]  
user@host# set protocols isis export dist-bgp
```

**Results** From configuration mode, confirm your configuration by entering the **show routing-instances** and **show policy-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show routing-instances  
aaaa {  
  protocols {  
    isis {  
      export dist-bgp;  
      no-ipv4-routing;  
      no-ipv6-routing;  
      clns-routing;  
      interface all;  
    }  
  }  
}  
  
user@host# show policy-options  
policy-statement dist-bgp {  
  from {  
    family iso;  
    protocol bgp;  
  }  
  then accept;  
}
```

If you are done configuring the device, enter **commit** from configuration mode.

### **Verification**

Confirm that the configuration is working properly.

- [Verifying the ISO Routes on page 3174](#)
- [Checking the SPF Calculations on page 3174](#)

### **Verifying the ISO Routes**

**Purpose** Verify that the expected ISO routes are displayed in the IS-IS routing table.

**Action** From operational mode, enter the [show isis route](#) command.

### **Checking the SPF Calculations**

**Purpose** Display information about IS-IS shortest-path-first (SPF) calculations.

**Action** From operational mode, enter the **show isis spf** command.

## **Example: Configuring IS-IS Designated Routers**

- [Understanding IS-IS Designated Routers on page 3175](#)
- [Example: Configuring Designated Router Election Priority for IS-IS on page 3175](#)



## Understanding IS-IS Designated Routers

A router advertises its priority to become a designated router in its hello packets. On all multiaccess networks (physical networks that support the attachment of more than two routers, such as Ethernet networks), IS-IS uses the advertised priorities to elect a designated router for the network. This router is responsible for sending network link-state advertisements, which describe all the routers attached to the network. These advertisements are flooded throughout a single area. The priority value is meaningful only on a multiaccess network. It has no meaning on a point-to-point interface.

A router's priority for becoming the designated router is indicated by an arbitrary number from 0 through 127, which you configure on the IS-IS interface. The router with the highest priority becomes the designated router for the area (Level 1, Level 2, or both), also configured on the IS-IS interface. If routers in the network have the same priority, then the router with the highest MAC address is elected as the designated router. By default, routers have a priority value of 64.

## Example: Configuring Designated Router Election Priority for IS-IS

This example shows how to configure the designated router election priority for IS-IS.

Before you begin:

- Configure network interfaces. See the *Junos OS Interfaces Configuration Guide for Security Devices*.
- Enable IS-IS on the interfaces. See [“Example: Configuring IS-IS” on page 3121](#).

In this example, you configure the priority for logical interface ge-0/0/1.0 to be 100 and the level number to be 1. If this interface has the highest priority value, the router becomes the designated router for the Level 1 area.

To configure a designated router election priority for IS-IS:

```
[edit]
user@host# set protocols isis interface ge-0/0/1.0 level 1 priority 100
```

### Related Documentation

- [Example: Configuring IS-IS](#)

## Example: Enabling Packet Checksums on IS-IS Interfaces

This example shows how to enable packet checksums for IS-IS interfaces.

- [Requirements on page 3175](#)
- [Overview on page 3176](#)
- [Configuration on page 3176](#)
- [Verification on page 3177](#)

## Requirements

Before you begin, configure IS-IS on both routers. See [“Example: Configuring IS-IS” on page 3121](#) for information about the sample IS-IS configuration.



## Overview


Junos OS supports IS-IS checksums as documented in RFC 3358, *Optional Checksums in Intermediate System to Intermediate System (ISIS)*.

IS-IS protocol data units (PDUs) include link-state PDUs, complete sequence number PDUs (CSNPs), partial sequence number PDUs (PSNPs), and IS-IS hello (IIH) packets. These PDUs can be corrupt due to faulty implementations of Layer 2 hardware or lack of checksums on a specific network technology. Corruption of length or type, length, and value (TLV) fields can lead to the generation of extensive numbers of empty link-state PDUs in the receiving node. Because authentication is not a replacement for a checksum mechanism, you might want to enable the optional checksum TLV on your IS-IS interfaces.

The checksum cannot be enabled with MD5 hello authentication on the same interface.

Figure 94 on page 3176 shows the topology used in this example.

Figure 94: IS-IS Checksum Topology

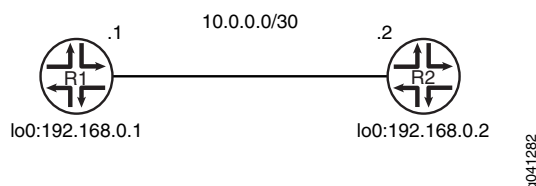

This example describes the steps on Device R1.

## Configuration

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```

Device R1  set protocols isis traceoptions file isis
            set protocols isis traceoptions flag all
            set protocols isis interface fe-1/2/0.1 checksum
  
```

### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure IS-IS checksums:

1. Enable checksums.
 

```

[edit protocols isis interface fe-1/2/0.1]
user@R1# set checksum
      
```
2. (Optional) Enable tracing for tracking checksum operations.
 

```

[edit protocols isis traceoptions]
user@R1# set file isis
user@R1# set flag all
      
```



**Results** From configuration mode, confirm your configuration by entering the **show protocols** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show protocols
isis {
  traceoptions {
    file isis;
    flag all;
  }
  interface fe-1/2/0.1 {
    checksum;
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.

#### Verifying Checksums

**Purpose** Verify that checksums are performed.

**Action** From operational mode, enter the **show log isis | match checksum** command.

```
user@R1> show log isis | match checksum
```

```
May 31 16:47:39.513267      sequence 0x49 checksum 0x8e64
May 31 16:47:39.513394      sequence 0x4e checksum 0x34b3
May 31 16:47:39.513517      sequence 0x50 checksum 0x9dcb
May 31 16:47:46.563781      sequence 0x45 checksum 0x7e1a
May 31 16:47:46.563970      sequence 0x46 checksum 0x226d
May 31 16:47:46.564104      sequence 0x52 checksum 0x99cd
May 31 16:47:46.581087      sequence 0x49 checksum 0x8e64
May 31 16:47:46.581222      sequence 0x4e checksum 0x34b3
May 31 16:47:46.581353      sequence 0x50 checksum 0x9dcb
May 31 16:47:55.799090      sequence 0x45 checksum 0x7e1a
May 31 16:47:55.799223      sequence 0x46 checksum 0x226d
May 31 16:47:55.799347      sequence 0x52 checksum 0x99cd
May 31 16:47:55.818255      sequence 0x49 checksum 0x8e64
May 31 16:47:55.818473      sequence 0x4e checksum 0x34b3
May 31 16:47:55.818606      sequence 0x50 checksum 0x9dcb
May 31 16:48:03.455816      sequence 0x49 checksum 0x8e64
May 31 16:48:03.455973      sequence 0x4e checksum 0x34b3
```

**Meaning** The output shows that checksum information is captured in the IS-IS trace log file.

**Related Documentation**

- Understanding Checksums on IS-IS Interfaces



## Configuration Tasks

---

- [Configuring IS-IS Authentication on page 3178](#)
- [Configuring Authentication Without Network-Wide Deployment on page 3179](#)

### Configuring IS-IS Authentication

All IS-IS protocol exchanges can be authenticated to guarantee that only trusted routing devices participate in the autonomous system (AS) routing. By default, IS-IS authentication is disabled on the routing device.

To configure IS-IS authentication, you must define an authentication password and specify the authentication type.

You can configure one of the following authentication methods:

- Simple authentication—Uses a text password that is included in the transmitted packet. The receiving routing device uses an authentication key (password) to verify the packet. Simple authentication is included for compatibility with existing IS-IS implementations. However, we recommend that you do *not* use this authentication method because it is insecure (the text can be “sniffed”).



**CAUTION:** A simple password that exceeds 254 characters is truncated.

- HMAC-MD5 authentication—Uses an iterated cryptographic hash function. The receiving routing device uses an authentication key (password) to verify the packet.

You can also configure more fine-grained interface-level authentication for hello packets.

To enable authentication and specify an authentication method, include the **authentication-type** statement, specifying the **simple** or **md5** authentication type:

**authentication-type** *authentication*;

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

To configure a password, include the **authentication-key** statement. The authentication password for all routing devices in a domain must be the same.

**authentication-key** *key*;

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

To configure hitless authentication key rollover, include the **authentication-key-chain (Protocols IS-IS)** statement.

The password can contain up to 255 characters. If you include spaces, enclose all characters in quotation marks (" ").



If you are using the Junos OS IS-IS software with another implementation of IS-IS, the other implementation must be configured to use the same password for the domain, the area, and all interfaces that are shared with a Junos OS implementation.

Authentication of hello packets, partial sequence number PDU (PSNP), and complete sequence number PDU (CSNP) can be suppressed to enable interoperability with the routing software of different vendors. Different vendors handle authentication in various ways, and suppressing authentication for different PDU types might be the simplest way to allow compatibility within the same network.

To configure IS-IS to generate authenticated packets, but not to check the authentication on received packets, include the **no-authentication-check** statement:

```
no-authentication-check;
```

To suppress authentication of IS-IS hello packets, include the **no-hello-authentication** statement:

```
no-hello-authentication;
```

To suppress authentication of PSNPs, include the **no-psnp-authentication** statement:

```
no-psnp-authentication;
```

To suppress authentication of CSNPs, include the **no-csnp-authentication** statement:

```
no-csnp-authentication;
```

For a list of hierarchy levels at which you can include these statements, see the statement summary sections for these statements.



**NOTE:** The **authentication** and the **no-authentication** statements must be configured at the same hierarchy level. Configuring authentication at the [edit protocols isis interface *interface-name*] hierarchy level and configuring **no-authentication** at the [edit protocols isis] hierarchy level has no effect.

#### Related Documentation

- [Configuring Authentication Without Network-Wide Deployment on page 3179](#)

## Configuring Authentication Without Network-Wide Deployment

To allow the use of authentication without requiring network-wide deployment, include the **loose-authentication-check** statement:

```
loose-authentication-check;
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.


#### Related Documentation

- [Example: Configuring Hitless Authentication Key Rollover for IS-IS](#)



## Configuration Statements

### authentication-key (Protocols IS-IS)

<b>Syntax</b>	authentication-key <i>key</i> ;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <b>level</b> <i>level-number</i> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>level</b> <i>level-number</i> ], [edit protocols isis <b>level</b> <i>level-number</i> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <b>level</b> <i>level-number</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Authentication key (password). Neighboring routing devices use the password to verify the authenticity of packets sent from this interface. For the key to work, you also must include the <b>authentication-type</b> statement.</p> <p>All routing devices must use the same password. If you are using the Junos OS IS-IS software with another implementation of IS-IS, the other implementation must be configured to use the same password for the domain, the area, and all interfaces adjacent to the Juniper Networks routing device.</p>
<b>Default</b>	If you do not include this statement and the <b>authentication-type</b> statement, IS-IS authentication is disabled.
<b>Options</b>	<p><b>key</b>—Authentication password. The password can be up to 1024 characters long. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").</p>
<div>  <p><b>CAUTION:</b> A simple password for authentication is truncated if it exceeds 254 characters.</p> </div>	
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Example: Configuring Hitless Authentication Key Rollover for IS-IS</li> </ul>



## authentication-key-chain (Protocols IS-IS)

<b>Syntax</b>	authentication-key-chain <i>key-chain-name</i> ;
<b>Hierarchy Level</b>	[edit logical-systems <i>name</i> protocols isis level <i>level-number</i> ], [edit logical-systems <i>name</i> routing-instances <i>instance-name</i> protocols isis level <i>level-number</i> ], [edit protocols isis level <i>level-number</i> ], [edit routing-instances <i>instance-name</i> protocols isis level <i>level-number</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.2. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Apply and enable an authentication keychain to the routing device.
<b>Options</b>	<b>key-chain</b> —Authentication keychain name. It can be up to 126 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 3135</a></li> <li>• <a href="#">Example: Configuring Route Authentication for BGP on page 2926</a></li> <li>• <a href="#">Example: Configuring BFD Authentication for Static Routes on page 2341</a></li> <li>• <a href="#">Configuring the Authentication Key Update Mechanism for BGP and LDP Routing Protocols</a></li> <li>• <a href="#">Understanding Hitless Authentication Key Rollover for IS-IS on page 3119</a></li> </ul>



## authentication-type (Protocols IS-IS)

---

<b>Syntax</b>	<code>authentication-type <i>authentication</i>;</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ], [edit protocols isis <a href="#">level level-number</a> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Enable authentication and specify the authentication scheme for IS-IS. If you enable authentication, you must specify a password by including the <b>authentication-key</b> statement.
<b>Default</b>	If you do not include this statement and the <b>authentication-key</b> statement, IS-IS authentication is disabled.
<b>Options</b>	<b><i>authentication</i></b> —Authentication scheme: <ul style="list-style-type: none"><li>• <b>md5</b>—Use HMAC authentication in combination with MD5. HMAC-MD5 authentication is defined in RFC 2104, <i>HMAC: Keyed-Hashing for Message Authentication</i>.</li><li>• <b>simple</b>—Use a simple password for authentication. The password is included in the transmitted packet, making this method of authentication relatively insecure. We recommend that you <i>not</i> use this authentication method.</li></ul>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Configuring Hitless Authentication Key Rollover for IS-IS</li><li>• <a href="#">authentication-key on page 3180</a></li><li>• <a href="#">no-authentication-check on page 3215</a></li></ul>



## bfd-liveness-detection (Protocols IS-IS)

<b>Syntax</b>	<pre> bfd-liveness-detection {     authentication {         algorithm <i>algorithm-name</i>;         key-chain <i>key-chain-name</i>;         loose-check;     }     detection-time {         threshold <i>milliseconds</i>;     }     minimum-interval <i>milliseconds</i>;     minimum-receive-interval <i>milliseconds</i>;     multiplier <i>number</i>;     no-adaptation;     transmit-interval {         minimum-interval <i>milliseconds</i>;         threshold <i>milliseconds</i>;     }     version (1   automatic); } </pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>detection-time threshold</b> and <b>transmit-interval threshold</b> options added in Junos OS Release 8.2.</p> <p>Support for logical systems introduced in Junos OS Release 8.3.</p> <p><b>no-adaptation</b> statement introduced in Junos OS Release 9.0.</p> <p><b>authentication algorithm</b>, <b>authentication key-chain</b>, and <b>authentication loose-check</b> options introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Configure bidirectional failure detection timers and authentication.
<b>Options</b>	<p><b>authentication algorithm <i>algorithm-name</i></b>—Configure the algorithm used to authenticate the specified BFD session: <b>simple-password</b>, <b>keyed-md5</b>, <b>keyed-sha-1</b>, <b>meticulous-keyed-md5</b>, <b>meticulous-keyed-sha-1</b>.</p> <p><b>authentication key-chain <i>key-chain-name</i></b>—Associate a security key with the specified BFD session using the name of the security keychain. The name you specify must match one of the keychains configured in the <b>authentication-key-chains key-chain</b> statement at the <b>[edit security]</b> hierarchy level.</p> <p><b>authentication loose-check</b>—(Optional) Configure loose authentication checking on the BFD session. Use only for transitional periods when authentication might not be configured at both ends of the BFD session.</p>



**detection-time threshold *milliseconds***—Configure a threshold for the adaptation of the BFD session detection time. When the detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.

**minimum-interval *milliseconds***—Configure the minimum interval after which the local routing device transmits a hello packet and then expects to receive a reply from the neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can specify the minimum transmit and receive intervals separately using the **transmit-interval** **minimum-interval** and **minimum-receive-interval** statements.

**Range:** 1 through 255,000

**minimum-receive-interval *milliseconds***—Configure the minimum interval after which the local routing device expects to receive a reply from a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum receive interval using the **minimum-interval** statement.

**Range:** 1 through 255,000

**multiplier *number***—Configure the number of hello packets not received by a neighbor that causes the originating interface to be declared down.

**Range:** 1 through 255

**Default:** 3

**no-adaptation**—Specify that BFD sessions not adapt to changing network conditions. We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation enabled in your network.

**transmit-interval threshold *milliseconds***—Configure the threshold for the adaptation of the BFD session transmit interval. When the transmit interval adapts to a value greater than the threshold, a single trap and a single system message are sent. The interval threshold must be greater than the minimum transmit interval.

**Range:** 0 through 4,294,967,295 ( $2^{32} - 1$ )

**transmit-interval minimum-interval *milliseconds***—Configure a minimum interval after which the local routing device transmits hello packets to a neighbor. Optionally, instead of using this statement, you can configure the minimum transmit interval using the **minimum-interval** statement.

**Range:** 1 through 255,000

**version**—Configure the BFD version to detect: **1** (BFD version 1) or **automatic** (autodetect the BFD version)

**Default:** automatic

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Configuring BFD for IS-IS</li><li>• Example: Configuring BFD Authentication for IS-IS</li></ul>
------------------------------	--



## checksum (Protocols IS-IS)

<b>Syntax</b>	checksum;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Enable checksums for packets on this interface.</p> <p>Junos OS supports IS-IS checksums as documented in RFC 3358, <i>Optional Checksums in Intermediate System to Intermediate System (ISIS)</i>.</p> <p>The checksum cannot be enabled with MD5 hello authentication on the same interface.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Example: Enabling Packet Checksums on IS-IS Interfaces</li> </ul>



## csnp-interval

---

<b>Syntax</b>	<code>csnp-interval (seconds   disable);</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ], [edit protocols isis <a href="#">interface interface-name</a> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Configure the interval between complete sequence number PDUs (CSNPs) on a LAN interface.</p> <p>If the routing device is the designated router on a LAN, IS-IS sends CSN packets every 10 seconds. If the routing device is on a point-to-point interface, it sends CSN packets every 5 seconds. To protect against link-state PDU flooding, we recommend modifying the default interval.</p> <p>To modify the CSNP interval, include the <b>csnp-interval</b> statement.</p> <p>To configure the interface not to send any CSNPs, specify the <b>disable</b> option.</p>
<b>Default</b>	By default, IS-IS sends CSNPs periodically. If the routing device is the designated router on a LAN, IS-IS sends CSNPs every 10 seconds. If the routing device is on a point-to-point interface, it sends CSNPs every 5 seconds.
<b>Options</b>	<p><b>disable</b>—Do not send CSNPs on this interface.</p> <p><b>seconds</b>—Number of seconds between the sending of CSNPs.</p> <p><b>Range:</b> 1 through 65,535 seconds</p> <p><b>Default:</b> 10 seconds on LAN broadcast links. 5 seconds on point-to-point links.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Example: Configuring the Transmission Frequency for CSNP Packets on IS-IS Interfaces</li></ul>




## disable (Protocols IS-IS)

<b>Syntax</b>	disable;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols <b>isis</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols isis <b>interface</b> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols isis <b>traffic-engineering</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>isis</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>traffic-engineering</b>],</p> <p>[edit protocols <b>isis</b>],</p> <p>[edit protocols isis <b>interface</b> <i>interface-name</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit protocols isis <b>traffic-engineering</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <b>isis</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <b>traffic-engineering</b>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Disable IS-IS on the routing device, on an interface, or on a level.</p> <p>At the <b>[edit protocols isis traffic-engineering]</b> hierarchy level, disable IS-IS support for traffic engineering.</p> <p>Enabling IS-IS on an interface (by including the <b>interface</b> statement at the <b>[edit protocols isis]</b> or the <b>[edit routing-instances routing-instance-name protocols isis]</b> hierarchy level), disabling it (by including the <b>disable</b> statement), and not actually having IS-IS run on an interface (by including the <b>passive</b> statement) are mutually exclusive states.</p>
<b>Default</b>	<p>IS-IS is enabled for Level 1 and Level 2 routers on all interfaces on which <b>family iso</b> is enabled.</p> <p>IS-IS support for traffic engineering is enabled.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Multi-Level IS-IS on page 3127</a></li> <li>• <a href="#">IS-IS Overview on page 3113</a></li> </ul>



## export (Protocols IS-IS)

---

<b>Syntax</b>	<code>export [ <i>policy-names</i> ];</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ], [edit protocols <a href="#">isis</a> ], [edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Apply one or more policies to routes being exported from the routing table into IS-IS.</p> <p>All routing protocols store the routes that they learn in the routing table. The routing table uses this collected route information to determine the active routes to destinations. The routing table then installs the active routes into its forwarding table and exports them into the routing protocols. It is these exported routes that the protocols advertise.</p> <p>For each protocol, you control which routes the protocol stores in the routing table and which routes the routing table exports into the protocol from the routing table by defining a <i>routing policy</i> for that protocol.</p>
	<div><p><b>NOTE:</b> For IS-IS, you cannot apply routing policies that affect how routes are imported into the routing table; doing so with a link-state protocol can easily lead to an inconsistent topology database.</p></div>
<b>Options</b>	<i>policy-names</i> —Name of one or more policies.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Redistributing OSPF Routes into IS-IS</li><li>• Example: Configuring an IS-IS Default Route Policy on Logical Systems</li></ul>



## external-preference (Protocols IS-IS)

<b>Syntax</b>	<code>external-preference <i>preference</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a>],</p> <p>[edit protocols isis <a href="#">level level-number</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Configure the preference of external routes.
<b>Options</b>	<p><b><i>preference</i></b>—Preference value.</p> <p><b>Range:</b> 0 through 4,294,967,295 (<math>2^{32} - 1</math>)</p> <p><b>Default:</b> 15 (for Level 1 internal routes), 18 (for Level 2 internal routes), 160 (for Level 1 external routes), 165 (for Level 2 external routes)</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Route Preferences Overview</li> <li>Example: Redistributing OSPF Routes into IS-IS</li> <li>Example: Redistributing BGP Routes with a Specific Community Tag into IS-IS</li> <li><a href="#">preference on page 3227</a></li> </ul>



## family (Protocols IS-IS)

---

<b>Syntax</b>	<pre>family inet {     shortcuts {         multicast-rpf-routes;     } } family inet6 {     shortcuts; }</pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols isis traffic-engineering], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis traffic-engineering], [edit protocols isis traffic-engineering], [edit routing-instances <i>routing-instance-name</i> protocols isis traffic-engineering]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.3. Support for IPv6 for IGP shortcuts introduced in Junos OS Release 9.3. Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Configure the address family for traffic engineering IS-IS interior gateway protocol (IGP) shortcuts.
<b>Options</b>	<p>inet—IPv4 address family</p> <p>inet6—IPv6 address family</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>•</li></ul>



## hello-authentication-key

<b>Syntax</b>	<code>hello-authentication-key password;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>number</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> level <i>number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>number</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Configure an authentication key (password) for hello packets. Neighboring routing devices use the password to verify the authenticity of packets sent from an interface. For the key to work, you also must include the <b>hello-authentication-type</b> statement.
<b>Default</b>	By default, hello authentication is not configured on an interface. However, if IS-IS authentication is configured, the hello packets are authenticated using the IS-IS authentication type and password.
<b>Options</b>	<p><b>password</b>—Authentication password. The password can be up to 255 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">authentication-key on page 3180</a></li> <li>• <a href="#">authentication-type on page 3182</a></li> <li>• <a href="#">hello-authentication-type on page 3193</a></li> </ul>




## hello-authentication-key-chain

---

<b>Syntax</b>	hello-authentication-key-chain <i>key-chain-name</i> ;
<b>Hierarchy Level</b>	[edit logical-systems <i>name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ], [edit logical-systems <i>name</i> routing-instances <i>instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ], [edit protocols isis interface <i>interface-name</i> level <i>level-number</i> ], [edit routing-instances <i>instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.2. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Apply an authentication keychain to the IS-IS interface.
<b>Options</b>	<i>key-chain-name</i> —Authentication keychain name. It can be up to 126 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Configuring Hitless Authentication Key Rollover for IS-IS</li></ul>



## hello-authentication-type

<b>Syntax</b>	hello-authentication-type (md5   simple);
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>number</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> level <i>number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>number</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Enable authentication on an interface for hello packets. If you enable authentication on hello packets, you must specify a password by including the <b>hello-authentication-key</b> statement.</p> <p>You can configure authentication for a given IS-IS level on an interface. On a point-to-point link, if you enable hello authentication for both IS-IS levels, the password configured for Level 1 is used for both levels.</p>
	<div>  <p><b>CAUTION:</b> If no authentication is configured for Level 1 on a point-to-point link with both levels enabled, the hello packets are sent without any password, regardless of the Level 2 authentication configurations.</p> </div>
<b>Default</b>	By default, hello authentication is not configured on an interface. However, if IS-IS authentication is configured, the hello packets are authenticated using the IS-IS authentication type and password.
<b>Options</b>	<p><b>md5</b>—Specifies Message Digest 5 as the packet verification type.</p> <p><b>simple</b>—Specifies simple authentication as the packet verification type.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">authentication-key on page 3180</a></li> <li>• <a href="#">authentication-type on page 3182</a></li> <li>• <a href="#">hello-authentication-key on page 3191</a></li> </ul>



## hello-interval (Protocols IS-IS)

---

<b>Syntax</b>	<code>hello-interval <i>seconds</i>;</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ], [edit protocols isis interface <i>interface-name</i> level <i>level-number</i> ], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Modify the frequency with which the routing device sends hello packets out of an interface, in seconds.</p> <p>Routing devices send hello packets at a fixed interval on all interfaces to establish and maintain neighbor relationships. This interval is advertised in the hello interval field in the hello packet.</p> <p>You can send out hello packets in subsecond intervals. To send out hello packets every 333 milliseconds, set the <b>hello-interval</b> value to 1.</p>
<b>Options</b>	<b><i>seconds</i></b> —Frequency of transmission for hello packets. <b>Range:</b> 1 through 20,000 seconds <b>Default:</b> 3 seconds (for designated intermediate system [DIS] routers), 9 seconds (for non-DIS routers)
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>hold-time</li></ul>



## hello-padding

<b>Syntax</b>	hello-padding (adaptive   disable   loose   strict);
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <b>interface</b> <i>interface-name</i> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i> ], [edit protocols isis <b>interface</b> <i>interface-name</i> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.0. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Configure padding on hello packets to accommodate asymmetrical maximum transfer units (MTUs) from different hosts.</p> <p>This helps to prevent a premature adjacency Up state when one routing device's MTU does not meet the requirements to establish the adjacency.</p> <p>As an OSI Layer 2 protocol, IS-IS does not support data fragmentation. Therefore, maximum packet sizes must be established and supported between two routers. During adjacency establishment, the IS-IS protocol makes sure that the link supports a packet size of 1492 bytes by padding outgoing hello packets up to the maximum packet size of 1492 bytes.</p> <p>This is the default behavior of the Junos OS IS-IS implementation. However, Junos OS provides an option to disable hello padding that can override this behavior.</p> <p>There are four types of hello padding:</p> <ul style="list-style-type: none"> <li>Adaptive padding—On point-to-point connections, the hello packets are padded from the initial detection of a new neighbor until the neighbor verifies the adjacency as Up in the adjacency state type, length, and value (TLV) tuple. If the neighbor does not support the adjacency state TLV, then padding continues. On LAN connections, padding starts from the initial detection of a new neighbor until there is at least one active adjacency on the interface. Adaptive padding has more overhead than loose padding and is able to detect MTU asymmetry from one side of the connection. This one-sided detection can result in generation of extra link-state PDUs that are flooded throughout the network. Specify the <b>adaptive</b> option to configure enough padding to establish an adjacency to neighbors.</li> <li>Disabled padding—Padding is disabled on all types of interfaces for all adjacency states. Specify the <b>disable</b> option to accommodate interfaces that support less than the default packet size of 1492 bytes.</li> <li>Loose padding (the default)—The hello packet is padded from the initial detection of a new neighbor until the adjacency transitions to the Up state. Loose padding might not be able to detect certain situations such as asymmetrical MTUs between the routing devices. Specify the <b>loose</b> option to configure enough padding to initialize an adjacency to neighbors.</li> </ul>



- **Strict padding**—Padding is done on all interface types and for all adjacency states, and is continuous. Strict padding has the most overhead. The advantage is that strict padding detects MTU issues on both sides of a link. Specify the **strict** option to configure padding to allow all adjacency states with neighbors.

**Options**    **adaptive**—Configure padding until the neighbor adjacency is established and active.

**disable**—Disable padding on all types of interfaces for all adjacency states.

**loose**—Configure padding until the state of the adjacency is initialized.

**strict**—Configure padding for all adjacency states.

**Required Privilege Level**    routing—To view this statement in the configuration.  
   routing-control—To add this statement to the configuration.

**Related Documentation**    • Example: Configuring IS-IS



## hold-time (Protocols IS-IS)

<b>Syntax</b>	<code>hold-time seconds;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Set the length of time a neighbor considers this router to be operative (up) after receiving a hello packet. If the neighbor does not receive another hello packet within the specified time, it marks this routing device as inoperative (down). The hold time itself is advertised in the hello packets.</p> <p>The hold time specifies how long a neighbor should consider this routing device to be operative without receiving another hello packet. If the neighbor does not receive a hello packet from this routing device within the hold time, it marks the routing device as being unavailable.</p>
<b>Options</b>	<p><b>seconds</b>—Hold-time value, in seconds.</p> <p><b>Range:</b> 3 through 65,535 seconds, or 1 to send out hello packets every 333 milliseconds</p> <p><b>Default:</b> 9 seconds (for designated intermediate system [DIS] routers), 27 seconds (for non-DIS routers; three times the default hello interval)</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Example: Configuring IS-IS</li> <li><a href="#">hello-interval on page 3194</a></li> </ul>



## ignore-attached-bit

---

<b>Syntax</b>	ignore-attached-bit;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ], [edit protocols <a href="#">isis</a> ], [edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Ignore the attached bit on IS-IS Level 1 routers. Configuring this statement enables the routing device to ignore the attached bit on incoming Level 1 link-state PDUs. If the attached bit is ignored, no default route, which points to the routing device which has set the attached bit, is installed.</p> <p>There might be times, such as during a denial-of-service (DoS) attack, that you do not want a Level 1 router to be able to forward traffic based on a default route.</p> <p>To prevent a routing device from being able to reach interarea destinations, you can prevent the routing device from installing the default route without affecting the status of its IS-IS adjacencies. The <b>ignore-attached-bit</b> statement is used to tell the routing device to ignore the presence of the attached bit in Level 1 link-state PDUs, which blocks the installation of the IS-IS default route.</p>
<b>Default</b>	The <b>ignore-attached-bit</b> statement is disabled by default.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>•</li></ul>



## interface (Protocols IS-IS)


```
Syntax interface (all | interface-name) {
    disable;
    bfd-liveness-detection {
        authentication {
            algorithm algorithm-name;
            key-chain key-chain-name;
            loose-check;
        }
        detection-time {
            threshold milliseconds;
        }
        minimum-interval milliseconds;
        minimum-receive-interval milliseconds;
        transmit-interval {
            threshold milliseconds;
            minimum-interval milliseconds;
        }
        multiplier number;
    }
    checksum;
    csnp-interval (seconds | disable);
    hello-padding (adaptive | loose | strict);
    ldp-synchronization {
        disable;
        hold-time seconds;
    }
    lsp-interval milliseconds;
    mesh-group (value | blocked);
    no-adjacency-holddown;
    no-ipv4-multicast;
    no-ipv6-multicast;
    no-ipv6-unicast;
    no-unicast-topology;
    passive;
    point-to-point;
    level level-number {
        disable;
        hello-authentication-key key;
        hello-authentication-key-chain key-chain-name;
        hello-authentication-type authentication;
        hello-interval seconds;
        hold-time seconds;
        ipv4-multicast-metric metric;
        ipv6-multicast-metric metric;
        ipv6-unicast-metric metric;
        metric metric;
        passive;
        priority number;
        te-metric metric;
    }
}
```



<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols <b>isis</b> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>isis</b> ], [edit protocols <b>isis</b> ], [edit routing-instances <i>routing-instance-name</i> protocols <b>isis</b> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Configure interface-specific IS-IS properties. To configure more than one interface, include the <b>interface</b> statement multiple times.</p> <p>Enabling IS-IS on an interface (by including the <b>interface</b> statement at the [edit protocols <b>isis</b>] or the [edit routing-instances <i>routing-instance-name</i> protocols <b>isis</b>] hierarchy level), disabling it (by including the <b>disable</b> statement), and not actually having IS-IS run on an interface (by including the <b>passive</b> statement) are mutually exclusive states.</p>
<b>Options</b>	<p><b>all</b>—Have Junos OS create IS-IS interfaces automatically. If you include this option, disable IS-IS on the management interface (fxp0).</p> <p><b>interface-name</b>—Name of an interface. Specify the full interface name, including the physical and logical address components.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Configuring IS-IS</li><li>• Example: Configuring Multi-Level IS-IS</li></ul>



## ipv4-multicast

<b>Syntax</b>	ipv4-multicast;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">topologies</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">topologies</a> ], [edit protocols isis <a href="#">topologies</a> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">topologies</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure alternate IPv4 multicast topologies.
	<div>  <p><b>NOTE:</b> The IS-IS interface metrics for the IPv4 topology can be configured independently of the IPv6 metrics. You can also selectively disable interfaces from participating in the IPv6 topology while continuing to participate in the IPv4 topology. This lets you exercise control over the paths that unicast data takes through a network.</p> </div>
<b>Default</b>	Multicast topologies are disabled.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 3156</a></li> </ul>



## ipv4-multicast-metric

---

<b>Syntax</b>	ipv4-multicast-metric <i>metric</i> ;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ], [edit protocols isis interface <i>interface-name</i> level <i>level-number</i> ], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Specify the multicast topology metric value for the level.
<b>Options</b>	<i>metric</i> —Metric value. <b>Range:</b> 0 through 16,777,215
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 3156</a></li></ul>

## ipv6-multicast

---

<b>Syntax</b>	ipv6-multicast;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <b>topologies</b> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>topologies</b> ], [edit protocols isis <b>topologies</b> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <b>topologies</b> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Configure alternate IPv6 multicast topologies.
<b>Default</b>	Multicast topologies are disabled.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 3156</a></li></ul>



## ipv6-multicast-metric


---

<b>Syntax</b>	<code>ipv6-multicast-metric <i>metric</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p>
<b>Description</b>	Specify the IPv6 alternate multicast topology metric value for the level.
<b>Options</b>	<p><i>metric</i>—Metric value.</p> <p><b>Range:</b> 0 through 16,777,215</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 3156</a></li> </ul>



## ipv6-unicast

---

<b>Syntax</b>	ipv6-unicast;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">topologies</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">topologies</a> ], [edit protocols isis <a href="#">topologies</a> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">topologies</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	<p>Configure alternate IPv6 unicast topologies.</p> <p>This statement causes IS-IS to calculate an alternate IPv6 unicast topology, in addition to the normal IPv4 unicast topology, and add the corresponding routes to inet6.0.</p> <div><p><b>NOTE:</b> The IS-IS interface metrics for the IPv4 topology can be configured independently of the IPv6 metrics. You can also selectively disable interfaces from participating in the IPv6 topology while continuing to participate in the IPv4 topology. This lets you exercise control over the paths that unicast data takes through a network.</p></div>
<b>Default</b>	IPv6 unicast topologies are disabled.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies</li></ul>



## ipv6-unicast-metric

<b>Syntax</b>	<code>ipv6-unicast-metric <i>metric</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p>
<b>Description</b>	Specify the IPv6 unicast topology metric value for the level. The IS-IS interface metrics for the IPv4 topology can be configured independently of the IPv6 metrics.
<b>Options</b>	<p><i>metric</i>—Metric value.</p> <p><b>Range:</b> 0 through 16,777,215</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies</li> </ul>



## isis

---

<b>Syntax</b>	isis { ... }
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols], [edit protocols], [edit routing-instances <i>routing-instance-name</i> protocols]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Enable IS-IS routing on the routing device or for a routing instance.  The <b>isis</b> statement is the one statement you must include in the configuration to run IS-IS on the routing device or in a routing instance.
<b>Default</b>	IS-IS is disabled on the routing device.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS on page 3121</a></li><li>• <a href="#">Example: Configuring Multi-Level IS-IS on page 3127</a></li></ul>



## level (Global IS-IS)

<b>Syntax</b>	<pre> level <i>level-number</i> {     authentication-key <i>key</i>;     authentication-key-chain (Protocols IS-IS) <i>key-chain-name</i>;     authentication-type <i>type</i>;     external-preference <i>preference</i>;     no-csnp-authentication;     no-hello-authentication;     no-psnp-authentication;     preference <i>preference</i>;     wide-metrics-only; } </pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>],</p> <p>[edit protocols <a href="#">isis</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Configure the global-level properties.</p> <p>You can administratively divide a single AS into smaller groups called areas. You configure each routing device interface to be in an area. Any interface can be in any area. The area address applies to the entire routing device. You cannot specify one interface to be in one area and another interface in a different area. To route between areas, you must have two adjacent Level 2 routers that communicate with each other.</p> <p>Level 1 routers can only route within their IS-IS area. To send traffic outside their area, Level 1 routers must send packets to the nearest intra-area Level 2 router. A routing device can be a Level 1 router, a Level 2 router, or both. You specify the router level on a per-interface basis, and a routing device becomes adjacent to other routing devices on the same level on that link only.</p> <p>You can configure one Level 1 routing process and one Level 2 routing process on each interface, and you can configure the two levels differently.</p>
<b>Options</b>	<p><i>level-number</i>—IS-IS level number.</p> <p><b>Values:</b> 1 or 2</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Example: Configuring IS-IS</li> <li>Example: Configuring Multi-Level IS-IS</li> </ul>



## loose-authentication-check

---

<b>Syntax</b>	loose-authentication-check;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ], [edit protocols <a href="#">isis</a> ], [edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Allow the use of MD5 authentication without requiring network-wide deployment.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Configuring Hitless Authentication Key Rollover for IS-IS</li></ul>



## lsp-interval

<b>Syntax</b>	<code>lsp-interval <i>milliseconds</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface</a> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface</a> <i>interface-name</i>],</p> <p>[edit protocols isis <a href="#">interface</a> <i>interface-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface</a> <i>interface-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Configure the link-state PDU interval time.</p> <p>By default, the routing device sends one link-state PDU packet out an interface every 100 milliseconds. To disable the transmission of all link-state PDUs, set the interval to 0.</p> <p>Link-state PDU throttling by use of the <b>lsp-interval</b> statement controls the flooding pace to neighboring routing devices in order to not overload them.</p> <p>Also, consider that control traffic (such as link-state PDUs and related packets) might delay user traffic (information packets) because control traffic always has precedence in terms of scheduling on the routing device interface cards. Unfortunately, the control traffic transmission rate is not decreased on low-bandwidth interfaces, such as DS-0 or fractional T1 and E1 interface. Line control traffic stays the same. On a low-bandwidth circuit that is transmitting 30 full-MTU-sized packets, there is not much bandwidth left over for other types of packets.</p>
<b>Default</b>	By default, the routing device sends one link-state PDU out an interface every 100 milliseconds.
<b>Options</b>	<p><b><i>milliseconds</i></b>—Number of milliseconds between the sending of link-state PDUs. Specifying a value of 0 blocks all link-state PDU transmission.</p> <p><b>Range:</b> 0 through 1000 milliseconds</p> <p><b>Default:</b> 100 milliseconds</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Example: Configuring the Transmission Frequency for Link-State PDUs on IS-IS Interfaces</li> </ul>



## lsp-lifetime

<b>Syntax</b>	<code>lsp-lifetime <i>seconds</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i>],</p> <p>[edit protocols <i>isis</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Specify how long a link-state PDU originating from the routing device should persist in the network. The routing device sends link-state PDUs often enough so that the link-state PDU lifetime never expires.</p> <p>Because link-state PDUs have a maximum lifetime, they need to be refreshed. Refreshing means that a router needs to re-originate its link-state PDUs periodically. The re-origination interval must be less than the link-state PDU's lifetime. For example, if the link-state PDU is valid for 1200 seconds, the routing device needs to refresh the link-state PDU in less than 1200 seconds to avoid removal of the link-state PDU from the link-state database by other routing devices. The recommended maximum link-state PDU origination interval is the lifetime minus 300 seconds. So, in a default environment this would be 900 seconds. In Junos OS, the refresh interval is derived from the lifetime and is equal to the lifetime minus 317 seconds. You can change the lifetime to a higher value to reduce the number of refreshes in the network. (You would rarely want to increase the number of refreshes.) Often these periodic link-state PDU refreshes are referred to as refresh noise, and network administrators want to reduce this noise as much as possible.</p> <p>The <code>show isis overview</code> command displays the link-state PDU lifetime.</p>
<b>Default</b>	By default, link-state PDUs are maintained in network databases for 1200 seconds (20 minutes) before being considered invalid. This length of time, called the <i>LSP lifetime</i> , normally is sufficient to guarantee that link-state PDUs never expire.
<b>Options</b>	<p><b><i>seconds</i></b>—link-state PDU lifetime, in seconds.</p> <p><b>Range:</b> 350 through 65,535 seconds</p> <p><b>Default:</b> 1200 seconds</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Example: Configuring the Transmission Frequency for Link-State PDUs on IS-IS Interfaces</li> <li><a href="http://www.juniper.net/us/en/training/certification/JNCIP_studyguide.pdf">http://www.juniper.net/us/en/training/certification/JNCIP_studyguide.pdf</a></li> </ul>



## max-areas

<b>Syntax</b>	<code>max-areas <i>number</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</p> <p>[edit protocols <a href="#">isis</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.1.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Modify the maximum number of IS-IS areas advertised.</p> <p>This value is included in the Maximum Address Area field of the IS-IS common PDU header included in all outgoing PDUs.</p> <p>The maximum number of areas you can advertise is restricted to 36 to ensure that the IIH PDUs have enough space to include other type, length, and value (TLV) fields, such as the Authentication and IPv4 and IPv6 Interface Address TLVs.</p>
<b>Options</b>	<p><b><i>number</i></b>—Maximum number of areas to include in the IS-IS hello (IIH) PDUs and link-state PDUs.</p> <p><b>Range:</b> 3 through 36</p> <p><b>Default:</b> 3</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Example: Configuring Multi-Level IS-IS</li> </ul>



## mesh-group (Protocols IS-IS)

---

<b>Syntax</b>	mesh-group (blocked   <i>value</i> );
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface</a> <i>interface-name</i> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface</a> <i>interface-name</i> ], [edit protocols isis <a href="#">interface</a> <i>interface-name</i> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface</a> <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Configure an interface to be part of a mesh group, which is a set of fully connected nodes.</p> <p>A <i>mesh group</i> is a set of routing devices that are fully connected. That is, they have a fully meshed topology. When link-state PDUs are being flooded throughout an area, each router within a mesh group receives only a single copy of a link-state PDU instead of receiving one copy from each neighbor, thus minimizing the overhead associated with the flooding of link-state PDUs.</p> <p>To create a mesh group and designate that an interface be part of the group, assign a mesh-group number to all the routing device interfaces in the group. To prevent an interface in the mesh group from flooding link-state PDUs, configure blocking on that interface.</p>
<b>Options</b>	<p><b>blocked</b>—Configure the interface so that it does not flood link-state PDUs.</p> <p><b>value</b>—Number that identifies the mesh group.</p> <p><b>Range:</b> 1 through 4,294,967,295 (<math>2^{32} - 1</math>; 32 bits are allocated to identify a mesh group)</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Example: Configuring Mesh Groups of IS-IS Interfaces</li></ul>



## metric (Protocols IS-IS)

<b>Syntax</b>	<code>metric <i>metric</i>;</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ], [edit protocols isis interface <i>interface-name</i> level <i>level-number</i> ], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Specify the metric value for the level.

All IS-IS routes have a cost, which is a routing metric that is used in the IS-IS link-state calculation. The cost is an arbitrary, dimensionless integer that can be from 1 through 63, or from 1 through 16,777,215 ( $2^{24} - 1$ ) if you are using wide metrics.

Similar to other routing protocols, IS-IS provides a way of exporting routes from the routing table into the IS-IS network. When a route is exported into the IS-IS network without a specified metric, IS-IS uses default metric values for the route, depending on the protocol that was used to learn the route.

Table 212 on page 3213 depicts IS-IS route export metric default values.

**Table 212: Default Metric Values for Routes Exported into IS-IS**

Protocol Used for Learning the Route	Default Metric Value
Direct	10
Static	Same as reported by the protocol used for exporting the route
Aggregate	10
Generate	10
RIP	Same as reported by the protocol used for exporting the route
OSPF	Same as reported by the protocol used for exporting the route
BGP	10

The default metric values behavior can be customized by using routing policies.

<b>Options</b>	<b><i>metric</i></b> —Metric value. <b>Range:</b> 1 through 63, or 1 through 16,777,215 (if you have configured wide metrics)
----------------	--



**Default:** 10 (for all interfaces except lo0), 0 (for the lo0 interface)

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Enabling Wide IS-IS Metrics for Traffic Engineering</li><li>• te-metric</li><li>• <a href="#">wide-metrics-only on page 3239</a></li></ul>

---

## no-adjacency-holddown

---

<b>Syntax</b>	no-adjacency-holddown;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ], [edit protocols <a href="#">isis</a> ], [edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.0. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Disable the hold-down timer for IS-IS adjacencies.</p> <p>A hold-down timer delays the advertising of adjacencies by waiting until a time period has elapsed before labeling adjacencies in the up state. You can disable this hold-down timer, which labels adjacencies up faster. However, disabling the hold-down timer creates more frequent link-state PDU updates and SPF computation.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">hold-time on page 3197</a></li></ul>



## no-authentication-check

<b>Syntax</b>	no-authentication-check;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ], [edit protocols <a href="#">isis</a> ], [edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Generate authenticated packets and check the authentication on received packets, but do not reject packets that cannot be authenticated.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">hello-authentication-type on page 3193</a></li> </ul>

## no-csnp-authentication

<b>Syntax</b>	no-csnp-authentication;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ], [edit protocols isis <a href="#">level level-number</a> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Suppress authentication check on complete sequence number PDU (CSNP) packets.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">csnp-interval on page 3186</a></li> </ul>



## no-hello-authentication

---

<b>Syntax</b>	no-hello-authentication;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ], [edit protocols isis <a href="#">level level-number</a> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Suppress authentication check on complete sequence number hello packets.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">hello-authentication-type on page 3193</a></li></ul>


## no-ipv4-multicast

---

<b>Syntax</b>	no-ipv4-multicast;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ], [edit protocols isis <a href="#">interface interface-name</a> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Exclude an interface from IPv4 multicast topologies.
<b>Default</b>	Multicast topologies are disabled.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 3156</a></li></ul>



## no-ipv4-routing

<b>Syntax</b>	no-ipv4-routing;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>],</p> <p>[edit protocols <a href="#">isis</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Disable IP version 4 (IPv4) routing.</p> <p>Disabling IPv4 routing has the following results:</p> <ul style="list-style-type: none"> <li>• The routing device does not advertise the network layer protocol identifier (NLPID) for IPv4 in the Junos OS link-state PDU fragment zero.</li> <li>• The routing device does not advertise any IPv4 prefixes in Junos OS link-state PDUs.</li> <li>• The routing device does not advertise the NLPID for IPv4 in Junos OS hello packets.</li> <li>• The routing device does not advertise any IPv4 addresses in Junos OS hello packets.</li> <li>• The routing device does not calculate any IPv4 routes.</li> </ul>
	<div>  <p><b>NOTE:</b> Note: Even when <code>no-ipv4-routing</code> is configured, an IS-IS traceoptions log can list rejected IPv4 addresses. When a configuration is committed, IS-IS schedules a scan of the routing table to determine whether any routes need to be exported into the IS-IS link state database. The implicit default export policy action is to reject everything. IPv4 addresses from the routing table are examined for export, rejected by the default policy, and the rejections are logged.</p> </div>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies</li> </ul>



## no-ipv6-multicast

---

<b>Syntax</b>	no-ipv6-multicast;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ], [edit protocols isis <a href="#">interface interface-name</a> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Exclude an interface from the IPv6 multicast topologies.
<b>Default</b>	Multicast topologies are disabled.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 3156</a></li></ul>



## no-ipv6-routing

<b>Syntax</b>	no-ipv6-routing;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ], [edit protocols <a href="#">isis</a> ], [edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Disable IP version 6 (IPv6) routing.  Disabling IPv6 routing has the following results: <ul style="list-style-type: none"> <li>• The routing device does not advertise the network layer protocol identifier (NLPID) for IPv6 in the Junos OS link-state PDU fragment zero.</li> <li>• The routing device does not advertise any IPv6 prefixes in Junos OS link-state PDUs.</li> <li>• The routing device does not advertise the NLPID for IPv6 in Junos OS hello packets.</li> <li>• The routing device does not advertise any IPv6 addresses in Junos OS hello packets.</li> <li>• The routing device does not calculate any IPv6 routes.</li> </ul>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies</li> </ul>



## no-ipv6-unicast

---

<b>Syntax</b>	no-ipv6-unicast;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ], [edit protocols isis <a href="#">interface interface-name</a> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Exclude an interface from the IPv6 unicast topologies. This enables you to exercise control over the paths that unicast data takes through a network.
<b>Default</b>	IPv6 unicast topologies are disabled.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies</a></li></ul>

## no-psnp-authentication

---

<b>Syntax</b>	no-psnp-authentication;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ], [edit protocols isis <a href="#">level level-number</a> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Suppress authentication check on partial sequence number PDU (PSNP) packets.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring IS-IS Authentication on page 3178</a></li></ul>



## no-unicast-topology

---

<b>Syntax</b>	no-unicast-topology;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ], [edit protocols isis <a href="#">interface interface-name</a> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Exclude an interface from the IPv4 unicast topologies.
<b>Default</b>	IPv4 unicast topologies are disabled.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 3156</a></li> </ul>



## overload (Protocols IS-IS)

---

<b>Syntax</b>	<pre>overload {     advertise-high-metrics;     allow-route-leaking;     timeout <i>seconds</i>; }</pre>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i> ], [edit protocols <i>isis</i> ], [edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Configure the local routing device so that it appears to be overloaded. This statement causes the routing device to continue participating in IS-IS routing, but prevents it from being used for transit traffic. Traffic destined to immediately attached subnets continues to transit the routing device.</p> <p>You can also advertise maximum link metrics in network layer reachability information (NLRI) instead of setting the overload bit.</p> <p>You configure or disable overload mode in IS-IS with or without a timeout. Without a timeout, overload mode is set until it is explicitly deleted from the configuration. With a timeout, overload mode is set if the time elapsed since the IS-IS instance started is less than the specified timeout.</p> <p>A timer is started for the difference between the timeout and the time elapsed since the instance started. If the time elapsed after the IS-IS instance is enabled is less than the specified timeout, overload mode is set. When the timer expires, overload mode is cleared. In overload mode, the routing device IS-IS advertisements are originated with the overload bit set. This causes the transit traffic to take paths around the routing device. However, the overloaded routing device's own links are still accessible.</p> <p>The value of the overload bit depends on these three scenarios:</p> <ol style="list-style-type: none"><li>1. When the overload bit has already been set to a given value and the routing process is restarted: Link-state PDUs are regenerated with the overload bit cleared.</li><li>2. When the overload bit is reset to a lesser value while the routing process is running: Link-state PDUs are regenerated with the overload bit cleared.</li><li>3. When the overload bit is reset to a greater value while the routing process is running: Link-state PDUs are regenerated with the overload bit set to the difference between the old and new value.</li></ol> <p>In overload mode, the routing device advertisement is originated with all the transit routing device links (except stub) set to a metric of 0xFFFF. The stub routing device links are</p>



advertised with the actual cost of the interfaces corresponding to the stub. This causes the transit traffic to avoid the overloaded routing device and take paths around the routing device.

To understand the reason for setting the overload bit, consider that BGP converges slowly. It is not very good at detecting that a neighbor is down because it has slow-paced keepalive timers. Once the BGP neighbor is determined to be down, it can take up to 2 minutes for a BGP router to declare the neighbor down. IS-IS is much quicker. IS-IS only takes 10-30 seconds to detect absent peers. It is the slowness of BGP, more precisely the slowness of internal BGP (IBGP), that necessitates the use of the overload bit. IS-IS and BGP routing are mutually dependent on each other. If both do not converge at the same time, traffic is dropped without notification (black holed).

You might want to configure the routing device so that it appears to be overloaded when you are restarting routing on the device. Setting the overload bit for a fixed amount of time right after a restart of the routing protocol process (rpd) ensures that the router does not receive transit traffic while the routing protocols (especially IBGP) are still converging.

Setting the overload bit is useful when performing hardware or software maintenance work on a routing device. After the maintenance work, clear the overload bit to carry on forwarding transit traffic. Manual clearing of the overload bit is not always possible. What is needed is an automated way of clearing the overload bit after some amount of time. Most networks use a time value of 300 seconds. This 5-minute value provides a good balance, allowing time to bring up even large internal IBGP meshes, while still relatively quick.

Another appropriate application for setting for the overload bit is on dedicated devices such as BGP route reflectors, which are intentionally not meant to carry any transit traffic. In this case, you would not use the timer.

You can verify that the overload bit is set by running the **show isis database** command.



**Options**    **advertise-high-metrics**—Advertise maximum link metrics in NLRI instead of setting the overload bit.

When you configure the **advertise-high-metrics** option, the routing device in overload mode stops passing (leaking) route information into the network. So an L1-L2 routing device in overload mode stops passing route information between Level 1 and Level 2 and clears its attached bit when the **advertise-high-metrics** option is configured.

**Default:** With **advertise-high-metrics** configured, the routing device in overload mode stops leaking route information into the network.

**allow-route-leaking**—Enable leaking of route information into the network even if the overload bit is set.



**NOTE:** The **allow-route-leaking** option does not work if the routing device is in dynamic overload mode. Dynamic overload can occur if the device has exceeded its resource limits, such as the prefix limit.

**timeout seconds**—Number of seconds at which the overloading is reset.

**Range:** 60 through 1800 seconds


**Default:** 0 seconds

**Required Privilege Level**    routing—To view this statement in the configuration.  
   routing-control—To add this statement to the configuration.

**Related Documentation**    • Example: Configuring IS-IS



## passive (Protocols IS-IS)

<b>Syntax</b>	<code>passive;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols isis <b>interface</b> <i>interface-name</i>],          [edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],          [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>],          [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],          [edit protocols isis <b>interface</b> <i>interface-name</i>],          [edit protocols isis interface <i>interface-name</i> level <i>level-number</i>],          [edit routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>],          [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Advertise the direct interface addresses on an interface or into a level on the interface without actually running IS-IS on that interface or level.</p> <p>This statement effectively prevents IS-IS from running on the interface. To enable IS-IS on an interface, include the <b>interface</b> statement at the [edit protocols isis] or the [edit routing-instances <i>routing-instance-name</i> protocols isis] hierarchy level. To disable it, include the <b>disable</b> statement at those hierarchy levels. The three states—enabling, disabling, or not running IS-IS on an interface—are mutually exclusive.</p>
	<div>  <p><b>NOTE:</b> Configuring IS-IS on a loopback interface automatically renders it as a passive interface, irrespective of whether the <b>passive</b> statement was used in the configuration of the interface.</p> </div>
	<p>If neither passive mode nor the <b>family iso</b> option is configured on the IS-IS interface, then the routing device treats the interface as not being operational, and no direct IPv4/IPv6 routes are exported into IS-IS. (You configure the <b>family iso</b> option at the [edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i>] hierarchy level.)</p>
<b>Default</b>	By default, IS-IS must be configured on an interface or a level for direct interface addresses to be advertised into that level.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Multi-Level IS-IS on page 3127</a></li> <li>• <code>disable</code></li> </ul>



## point-to-point

---

<b>Syntax</b>	point-to-point;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ], [edit protocols isis <a href="#">interface interface-name</a> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Configure an IS-IS interface to behave like a point-to-point connection.</p> <p>You can use the <b>point-to-point</b> statement to configure a LAN interface to act like a point-to-point interface for IS-IS. You do not need an unnumbered LAN interface, and it has no effect if configured on an interface that is already point-to-point.</p> <p>The <b>point-to-point</b> statement affects only IS-IS protocol procedures on that interface. All other protocols continue to treat the interface as a LAN interface. Only two IS-IS routing devices can be connected to the LAN interface, and both must be configured as point-to-point.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">IS-IS Overview on page 3113</a></li><li>• <a href="#">Understanding IS-IS Designated Routers on page 3175</a></li><li>• <a href="#">Example: Configuring Synchronization Between IS-IS and LDP</a></li></ul>



## preference (Protocols IS-IS)

<b>Syntax</b>	<code>preference <i>preference</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a>],</p> <p>[edit protocols isis <a href="#">level level-number</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Configure the preference of internal routes.</p> <p>Route preferences (also known as administrative distances) are used to select which route is installed in the forwarding table when several protocols calculate routes to the same destination. The route with the lowest preference value is selected.</p> <p>To change the preference values, include the <b>preference</b> statement (for internal routes) or the <b>external-preference</b> statement.</p>
<b>Options</b>	<p><b><i>preference</i></b>—Preference value.</p> <p><b>Range:</b> 0 through 4,294,967,295 (<math>2^{32} - 1</math>)</p> <p><b>Default:</b> 15 (for Level 1 internal routes), 18 (for Level 2 internal routes), 160 (for Level 1 external routes), 165 (for Level 2 external routes)</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Route Preferences Overview</li> <li>Example: Redistributing OSPF Routes into IS-IS</li> <li>Example: Redistributing BGP Routes with a Specific Community Tag into IS-IS</li> <li><a href="#">external-preference on page 3189</a></li> </ul>



## prefix-export-limit (Protocols IS-IS)

---

<b>Syntax</b>	<code>prefix-export-limit <i>number</i>;</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ], [edit protocols isis <a href="#">level level-number</a> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Configure a limit to the number of prefixes exported into IS-IS.</p> <p>By default, there is no limit to the number of prefixes that can be exported into IS-IS. To configure a limit to the number of prefixes that can be exported into IS-IS, include the <b>prefix-export-limit</b> statement. The <b>prefix-export-limit</b> statement protects the rest of the network from a malicious policy by applying a threshold filter for exported routes.</p> <p>The number of prefixes depends on the size of your network. Good design advice is to set it to double the total number of IS-IS Level 1 and Level 2 routing devices in your network.</p> <p>If the number of prefixes exported into IS-IS exceeds the configured limit, the overload bit is set and the overload state is reached. When other routers detect that this bit is set, they do not use this routing device for transit traffic, but they do use it for packets destined to the overloaded routing device's directly connected networks and IP prefixes. The overload state can be cleared by using the <a href="#">clear isis overload</a> command.</p> <p>The <a href="#">show isis overview</a> command displays the prefix export limit when it is configured.</p>
<b>Options</b>	<p><b><i>number</i></b>—Prefix limit.</p> <p><b>Range:</b> 0 through 4,294,967,295 (<math>2^{32} - 1</math>)</p> <p><b>Default:</b> None</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Redistributing BGP Routes with a Specific Community Tag into IS-IS</li><li>• Example: Redistributing OSPF Routes into IS-IS</li></ul>



## priority (Protocols IS-IS)

<b>Syntax</b>	<code>priority <i>number</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Configure the interface's priority for becoming the designated router. The interface with the highest priority value becomes that level's designated router.</p> <p>The priority value is meaningful only on a multiaccess network. It has no meaning on a point-to-point interface.</p> <p>A routing device advertises its priority to become a designated router in its hello packets. On all multiaccess networks, IS-IS uses the advertised priorities to elect a designated router for the network. This routing device is responsible for sending network link-state advertisements, which describe all the routing devices attached to the network. These advertisements are flooded throughout a single area.</p> <p>A routing device's priority for becoming the designated router is indicated by an arbitrary number from 0 through 127. Routing devices with a higher value are more likely to become the designated router.</p>
<b>Options</b>	<p><i>number</i>—Priority value.</p> <p><b>Range:</b> 0 through 127</p> <p><b>Default:</b> 64</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS Designated Routers on page 3174</a></li> </ul>



## reference-bandwidth (Protocols IS-IS)

---

<b>Syntax</b>	<code>reference-bandwidth <i>reference-bandwidth</i>;</code>
<b>Hierarchy Level</b>	<code>[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i>],</code> <code>[edit protocols <i>isis</i>],</code> <code>[edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i>]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Optimize routing based on bandwidth by setting the reference bandwidth used in calculating the default interface cost.</p> <p>All IS-IS interfaces have a cost, which is a routing metric that is used in the IS-IS link-state calculation. Routes with lower total path metrics are preferred over those with higher path metrics. When there are several equal-cost routes to a destination, traffic is distributed equally among them.</p> <p>The cost of a route is described by a single dimensionless metric that is determined using the following formula:</p> $\text{cost} = \text{reference-bandwidth} / \text{bandwidth}$ <p>For example, if you set the reference bandwidth to 1 Gbps (that is, <i>reference-bandwidth</i> is set to 1,000,000,000), a 100-Mbps interface has a routing metric of 10.</p> <p>All IS-IS interfaces have a cost, which is a routing metric that is used in the IS-IS link-state calculation. Routes with lower total path metrics are preferred over those with higher path metrics.</p>
<b>Options</b>	<p><i>reference-bandwidth</i>—Reference bandwidth value in bits per second.</p> <p><b>Range:</b> 9600 through 1,000,000,000,000 bps</p> <p><b>Default:</b> None</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>Example: Configuring IS-IS</li><li><a href="http://www.juniper.net/us/en/training/certification/JNCIP_studyguide.pdf">http://www.juniper.net/us/en/training/certification/JNCIP_studyguide.pdf</a></li></ul>



## rib-group (Protocols IS-IS)

<b>Syntax</b>	<pre> rib-group {     inet <i>group-name</i>;     inet6 <i>group-name</i>; } </pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>],</p> <p>[edit protocols <a href="#">isis</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Install routes learned from IS-IS routing instances into routing tables in the IS-IS routing table group. You can install IPv4 routes or IPv6 routes.</p> <p>Support for IPv6 routing table groups in IS-IS enables IPv6 routes that are learned from IS-IS routing instances to be installed into other routing tables defined in an IS-IS routing table group.</p>
<b>Options</b>	<p><b><i>group-name</i></b>—Name of the routing table group.</p> <p><b>inet</b>—Install IPv4 IS-IS routes.</p> <p><b>inet6</b>—Install IPv6 IS-IS routes.</p>
<b>Required Privilege Level</b>	<p><b>routing</b>—To view this statement in the configuration.</p> <p><b>routing-control</b>—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Exporting Specific Routes from One Routing Table Into Another Routing Table</li> <li>• Example: Importing Direct and Static Routes Into a Routing Instance</li> <li>• Understanding Multiprotocol BGP</li> </ul>



## topologies (Protocols IS-IS)

---

<b>Syntax</b>	<pre>topologies {     ipv4-multicast;     ipv6-multicast;     ipv6-unicast; }</pre>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ], [edit protocols <a href="#">isis</a> ], [edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure alternate IS-IS topologies.  The remaining statements are explained separately.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies</li><li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 3156</a></li></ul>



## traceoptions (Protocols IS-IS)

<b>Syntax</b>	<pre>traceoptions {     file <i>name</i> &lt;size <i>size</i>&gt; &lt;files <i>number</i>&gt; &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i> &lt;flag-modifier&gt; &lt;disable&gt;; }</pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>],</p> <p>[edit protocols <a href="#">isis</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Configure IS-IS protocol-level tracing options. To specify more than one tracing operation, include multiple <b>flag</b> statements.



**NOTE:** The **traceoptions** statement is not supported on QFabric systems.

<b>Default</b>	The default IS-IS protocol-level tracing options are those inherited from the routing protocols <b>traceoptions</b> statement included at the <b>[edit routing-options]</b> hierarchy level.
<b>Options</b>	<p><b>disable</b>—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as <b>all</b>.</p> <p><b>file <i>name</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks (" "). All files are placed in the directory <b>/var/log</b>. We recommend that you place IS-IS tracing output in the file <b>isis-log</b>.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file named <b>trace-file</b> reaches its maximum size, it is renamed <b>trace-file.0</b>, then <b>trace-file.1</b>, and so on, until the maximum number of trace files is reached. Then, the oldest trace file is overwritten.</p> <p>If you specify a maximum number of files, you also must specify a maximum file size with the <b>size</b> option.</p> <p><b>Range:</b> 2 through 1000 files</p> <p><b>Default:</b> 10 files</p> <p><b>flag <i>flag</i></b>—Tracing operation to perform. To specify more than one flag, include multiple <b>flag</b> statements.</p>

### IS-IS Protocol-Specific Tracing Flags



- **csn**—Complete sequence number PDU (CSNP) packets
- **error**—Errored IS-IS packets
- **graceful-restart**—Graceful restart operation
- **hello**—Hello packets
- **ldp-synchronization**—Synchronization between IS-IS and LDP
- **lsp**—Link-state PDUs
- **lsp-generation**—Link-state PDU generation packets
- **packets**—All IS-IS protocol packets
- **psn**—Partial sequence number PDU (PSNP) packets
- **spf**—Shortest-path-first calculations

#### Global Tracing Flags

- **all**—All tracing operations
- **general**—A combination of the **normal** and **route** trace operations
- **normal**—All normal operations, including adjacency changes

**Default:** If you do not specify this option, only unusual or abnormal operations are traced.

- **policy**—Policy operations and actions
- **route**—Routing table changes
- **state**—State transitions
- **task**—Routing protocol task processing
- **timer**—Routing protocol timer processing

***flag-modifier***—(Optional) Modifier for the tracing flag. You can specify one or more of these modifiers:

- **detail**—Provide detailed trace information.
- **receive**—Trace the packets being received.
- **send**—Trace the packets being transmitted.

**no-world-readable**—(Optional) Prevent any user from reading the log file.



**size** *size*—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches this size, it is renamed **trace-file.0**. When the **trace-file** again reaches its maximum size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. Note that if you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

**Syntax:** *xk* to specify KB, *xm* to specify MB, or *xg* to specify GB

**Range:** 10 KB through the maximum file size supported on your system

**Default:** 128 KB

**world-readable**—(Optional) Allow any user to read the log file.

<b>Required Privilege</b>	routing and trace—To view this statement in the configuration.
<b>Level</b>	routing-control and trace-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Configuring the Transmission Frequency for CSNPs on IS-IS Interfaces</li> <li>• Example: Configuring the Transmission Frequency for Link-State PDUs on IS-IS Interfaces</li> <li>• Example: Enabling Packet Checksums on IS-IS Interfaces</li> </ul>



## traffic-engineering (Protocols IS-IS)

<b>Syntax</b>	<pre> traffic-engineering {   disable;   credibility-protocol-preference;   family inet {     shortcuts {       multicast-rpf-routes;     }   }   family inet6 {     shortcuts;   }   multipath {     lsp-equal-cost;   } } </pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i>],</p> <p>[edit protocols <i>isis</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Support for the <b>family</b> statement introduced in Junos OS Release 9.3.</p> <p>Support for the <b>credibility-protocol-preference</b> statement introduced in Junos OS Release 9.4.</p> <p>Support for the <b>multipath</b> statement introduced in Junos OS Release 9.6.</p> <p>Support for the <b>lsp-equal-cost</b> statement introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Configure traffic engineering properties for IS-IS.</p> <p>IS-IS always performs shortest-path-first (SPF) calculations to determine next hops. For prefixes reachable through a particular next hop, IS-IS places that next hop for that prefix in the inet.0 routing table. In addition, for routers running MPLS, IS-IS installs the prefix for IPv4 routes in the inet.3 routing table as well. The inet.3 table, which is present on the ingress router, contains the host address of each MPLS label-switched path (LSP) egress router. BGP uses this routing table to resolve next-hop addresses.</p> <p>If you enable IS-IS traffic engineering shortcuts and if there is a label-switched path to a point along the path to that prefix, IS-IS installs the prefix in the inet.3 routing table and uses the LSP as a next hop. The net result is that for BGP egress routers for which there is no LSP, BGP automatically uses an LSP along the path to reach the egress router.</p> <p>In Junos OS Release 9.3 and later, IS-IS traffic engineering shortcuts support IPv6 routes. LSPs to be used for shortcuts continue to be signaled using IPv4. However, by default, shortcut routes calculated through IPv6 routes are added to the inet6.3 routing table. The default behavior is for only BGP to use LSPs in its calculations. If you configure MPLS so that both BGP and interior gateway protocols use LSPs for forwarding traffic, shortcut routes calculated through IPv6 are added to the inet6.0 routing table. IS-IS ensures that</p>



the IPv6 routes running over the IPv4 MPLS LSP are correctly de-encapsulated at the tunnel egress by pushing an extra IPv6 explicit null label between the IPv6 payload and the IPv4 transport label.

RSVP LSPs with a higher preference than IS-IS routes are not considered during the computation of traffic engineering shortcuts.

To configure IS-IS so that it uses LSPs as shortcuts when installing information in the inet.3 or inet6.3 routing table, include the following statements:

```
family inet {
  shortcuts {
    multicast-rpf-routes;
  }
}
family inet6 {
  shortcuts;
}
```

For IPv4 traffic, include the **inet** statement. For IPv6 traffic, include the **inet6** statement.

To configure load balancing across multiple LSPs, include the **multipath** statement.

When traffic engineering shortcuts are used, RSVP first looks at the **metric2** value, which is derived from the IGP cost. After this, RSVP considers the LSP metric value. So, if a certain path changes for an LSP and the cost changes, not all LSPs are used to load-balance the network.

When a route with an improved metric is added to the IS-IS internal routing table, IS-IS flushes all next-hop information (including LSP next-hop information) for a route. This is undesirable, because certain equal-cost multipath (ECMP) combinations can be lost during route calculation. To override this default behavior for load balancing, include the **lsp-equal-cost** statement to retain the equal cost path information in the routing table.

```
multipath {
  lsp-equal-cost;
}
```

Because the inet.3 routing table is present only on ingress routers, you can configure LSP shortcuts only on these routers.

**Default** IS-IS traffic engineering support is enabled.

By default, IS-IS supports traffic engineering by exchanging basic information with the traffic engineering database. To disable this support, and to disable IS-IS shortcuts if they are configured, include the **disable** statement.



**Options**    **credibility-protocol-preference**—Specify that IS-IS should use the configured protocol preference for IGP routes to determine the traffic engineering database credibility value. By default, the traffic engineering database prefers IS-IS routes even when the routes of another IGP are configured with a lower, that is, more preferred value. Use this statement to override this default behavior.

The traffic engineering database assigns a credibility value to each IGP and prefers the routes of the IGP with the highest credibility value. In Junos OS Release 9.4 and later, you can configure IS-IS to take protocol preference into account to determine the traffic engineering database credibility value. When protocol preference is used to determine the credibility value, IS-IS routes are not automatically preferred by the traffic engineering database, depending on your configuration. For example, OSPF routes have a default preference value of 10, whereas IS-IS Level 1 routes have a default preference value of 15. When protocol preference is enabled, the credibility value is determined by deducting the protocol preference value from a base value of 512. Using default protocol preference values, OSPF has a credibility value of 502, whereas IS-IS has a credibility value of 497. Because the traffic engineering database prefers IGP routes with the highest credibility value, OSPF routes are now preferred.



**NOTE:** This feature is also supported for OSPFv2.

---

**lsp-equal-cost**—Configure LSPs to be retained as equal cost paths for load balancing when a better path metric is found during the IS-IS internal routing table calculation. When a route with an improved metric is added to the IS-IS internal routing table, IS-IS flushes all next-hop information (including LSP next-hop information) for a route. This is undesirable, because certain equal-cost multipath (ECMP) combinations can be lost during route calculation. To override this default IS-IS behavior, include the **lsp-equal-cost** statement for load balancing, so that the equal cost path information is retained in the routing table.

**multipath**—Enable load balancing for multiple LSPs.

The remaining statements are explained separately.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Enabling OSPF Traffic Engineering Support on page 3394</a></li><li>• <a href="#">Example: Enabling IS-IS Traffic Engineering Support</a></li><li>• <a href="#">traffic-engineering (OSPF) on page 3479</a></li></ul>
------------------------------	---



## wide-metrics-only

<b>Syntax</b>	wide-metrics-only;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> protocols isis <b>level</b> <i>level-number</i> ], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>level</b> <i>level-number</i> ], [edit protocols isis <b>level</b> <i>level-number</i> ], [edit routing-instances <i>routing-instance-name</i> protocols isis <b>level</b> <i>level-number</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure IS-IS to generate metric values greater than 63 on a per IS-IS level basis.  Normally, IS-IS metrics can have values up to 63, and IS-IS generates two type, length, and value (TLV) tuples, one for an IS-IS adjacency and the second for an IP prefix. To allow IS-IS to support traffic engineering, a second pair of TLVs has been added to IS-IS, one for IP prefixes and the second for IS-IS adjacency and traffic engineering information. With these TLVs, IS-IS metrics can have values up to 16,777,215 ( $2^{24} - 1$ ).  To configure IS-IS to generate only the new pair of TLVs and thus to allow the wider range of metric values, include the <b>wide-metrics-only</b> statement.
<b>Default</b>	By default, Junos OS supports the sending and receiving of wide metrics. Junos OS allows a maximum metric value of 63 and generates both pairs of TLVs.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Example: Enabling Wide IS-IS Metrics for Traffic Engineering</li> <li>te-metric</li> </ul>







## CHAPTER 36

# Administration

- [Operational Commands on page 3241](#)

## Operational Commands

---



## clear isis adjacency

---

<b>Syntax</b>	clear isis adjacency <instance <i>instance-name</i> > <interface <i>interface-name</i> > <logical-system (all   <i>logical-system-name</i> )> <neighbor>
<b>Syntax (EX Series Switches and QFX Series)</b>	clear isis adjacency <instance <i>instance-name</i> > <interface <i>interface-name</i> > <neighbor>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Remove entries from the IS-IS adjacency database.
<b>Options</b>	<b>none</b> —Remove all entries from the adjacency database.  <b>instance <i>instance-name</i></b> —(Optional) Clear all adjacencies for the specified routing instance only.  <b>interface <i>interface-name</i></b> —(Optional) Clear all adjacencies for the specified interface only.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.  <b>neighbor</b> —(Optional) Clear adjacencies for the specified neighbor only.
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show isis adjacency on page 3250</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear isis adjacency on page 3243</a>
<b>Output Fields</b>	See <a href="#">show isis adjacency</a> for an explanation of output fields.



## Sample Output

### clear isis adjacency

The following sample output displays IS-IS adjacency database information before and after the **clear isis adjacency** command is entered:

```
user@host> show isis adjacency
IS-IS adjacency database:
Interface      System          L State          Hold (secs) SNPA
so-1/0/0.0     karakul         3 Up             26
so-1/1/3.0     1921.6800.5080 3 Up             23
so-5/0/0.0     1921.6800.5080 3 Up             19
```


```
user@host> clear isis adjacency karakul
```

```
user@host> show isis adjacency
IS-IS adjacency database:
Interface      System          L State          Hold (secs) SNPA
so-1/0/0.0     karakul         3 Initializing   26
so-1/1/3.0     1921.6800.5080 3 Up             24
so-5/0/0.0     1921.6800.5080 3 Up             21
```



## clear isis database

---

<b>Syntax</b>	clear isis database <entries> <instance <i>instance-name</i> > <logical-system (all   <i>logical-system-name</i> )> <purge>
<b>Syntax (EX Series Switches and QFX Series)</b>	clear isis database <entries> <instance <i>instance-name</i> > <purge>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. <b>purge</b> option introduced in Junos OS Release 9.0. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Remove the entries from the IS-IS link-state database, which contains prefixes and topology information. You can also use <b>purge</b> with any of the options to initiate a network-wide purge of link-state PDUs rather than the local deletion of entries from the IS-IS link-state database.
<div><div><b>CAUTION:</b> In a production network, the <b>purge</b> command option might cause short-term network-wide traffic disruptions.</div></div>	
<b>Options</b>	<b>none</b> —Remove all entries from the IS-IS link-state database for all routing instances.  <b>entries</b> —(Optional) Name of the database entry.  <b>instance <i>instance-name</i></b> —(Optional) Clear all entries for the specified routing instance.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.  <b>purge</b> —(Optional) Discard all entries in the IS-IS link-state database.
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show isis database on page 3256</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear isis database on page 3245</a>
<b>Output Fields</b>	See <a href="#">show isis database</a> for an explanation of output fields.



## Sample Output

### clear isis database

The following sample output displays IS-IS link-state database information before and after the **clear isis database** command is entered:

```
user@host> show isis database
IS-IS level 1 link-state database:
LSP ID                Sequence Checksum Lifetime (secs)
crater.00-00          0x12    0x84dd             1139
    1 LSPs
IS-IS level 2 link-state database:
LSP ID                Sequence Checksum Lifetime (secs)
crater.00-00          0x19    0xe92c             1134
badlands.00-00        0x16    0x1454             985
carlsbad.00-00        0x33    0x220b             1015
ranier.00-00          0x2e    0xfc31             1007
1921.6800.5066.00-00  0x11    0x7313              566
1921.6800.5067.00-00  0x14    0xd9d4              939
    6 LSPs
```

```
user@host> clear isis database
```

```
user@host> show isis database
IS-IS level 1 link-state database:
LSP ID                Sequence Checksum Lifetime (secs)

IS-IS level 2 link-state database:
LSP ID                Sequence Checksum Lifetime (secs)
```



## clear isis overload

---

<b>Syntax</b>	clear isis overload <instance <i>instance-name</i> > <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches and QFX Series)</b>	clear isis overload <instance <i>instance-name</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	<p>Reset the IS-IS dynamic overload bit. This command can appear to not work, continuing to display <b>overload</b> after execution. The bit is reset only if the root cause is corrected by configuration remotely or locally.</p> <p>When other routers detect that the overload bit is set, they do not use this routing device for transit traffic, but they do use it for packets destined to the overloaded routing device's directly connected networks and IP prefixes.</p>
<b>Options</b>	<p><b>none</b>—Reset the IS-IS dynamic overload bit.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Reset the IS-IS dynamic overload bit for the specified routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show isis database on page 3256</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear isis overload on page 3247</a>
<b>Output Fields</b>	See <a href="#">show isis database</a> for an explanation of output fields.



## Sample Output

### clear isis overload

The following sample output displays IS-IS database information before and after the **clear isis overload** command is entered:

```
user@host> show isis database
IS-IS level 1 link-state database:
LSP ID                Sequence Checksum Lifetime Attributes
pro3-c.00-00          0x4    0x10db    1185 L1 L2 Overload

  1 LSPs
IS-IS level 2 link-state database:
LSP ID                Sequence Checksum Lifetime Attributes
pro3-c.00-00          0x5    0x429f    1185 L1 L2 Overload

pro2-a.00-00          0x91e   0x2589     874 L1 L2
pro2-a.02-00          0x1     0xcbc     874 L1 L2
  3 LSPs

user@host> clear isis overload

user@host> show isis database
IS-IS level 1 link-state database:
LSP ID                Sequence Checksum Lifetime Attributes
pro3-c.00-00          0xa    0x429e    1183 L1 L2
  1 LSPs

IS-IS level 2 link-state database:
LSP ID                Sequence Checksum Lifetime Attributes
pro3-c.00-00          0xc    0x9c39    1183 L1 L2
pro2-a.00-00          0x91e   0x2589     783 L1 L2
pro2-a.02-00          0x1     0xcbc     783 L1 L2
  3 LSPs
```



## clear isis statistics

---

<b>Syntax</b>	clear isis statistics <instance <i>instance-name</i> > <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches and QFX Series)</b>	clear isis statistics <instance <i>instance-name</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Set statistics about IS-IS traffic to zero.
<b>Options</b>	<b>none</b> —Set IS-IS traffic statistics to zero for all routing instances.  <b>instance <i>instance-name</i></b> —(Optional) Set IS-IS traffic statistics to zero for the specified routing instance only.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show isis statistics on page 3276</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear isis statistics on page 3249</a>
<b>Output Fields</b>	See <a href="#">show isis statistics</a> for an explanation of output fields.



## Sample Output

### clear isis statistics

The following sample output displays IS-IS statistics before and after the **clear isis statistics** command is entered:

```
user@host> show isis statistics
IS-IS statistics for merino:
```

PDU type	Received	Processed	Drops	Sent	Rexmit
LSP	12793	12793	0	8666	719
IIH	116751	116751	0	118834	0
CSNP	203956	203956	0	204080	0
PSNP	7356	7350	6	8635	0
Unknown	0	0	0	0	0
Totals	340856	340850	6	340215	719

Total packets received: 340856 Sent: 340934

SNP queue length: 0 Drops: 0  
LSP queue length: 0 Drops: 0

SPF runs: 1064  
Fragments rebuilt: 1087  
LSP regenerations: 436  
Purges initiated: 0

```
user@host> clear isis statistics

user@host> show isis statistics
IS-IS statistics for merino:
```

PDU type	Received	Processed	Drops	Sent	Rexmit
LSP	0	0	0	0	0
IIH	3	3	0	3	0
CSNP	2	2	0	4	0
PSNP	0	0	0	0	0
Unknown	0	0	0	0	0
Totals	5	5	0	7	0

Total packets received: 5 Sent: 7

SNP queue length: 0 Drops: 0  
LSP queue length: 0 Drops: 0

SPF runs: 0  
Fragments rebuilt: 0  
LSP regenerations: 0  
Purges initiated: 0



## show isis adjacency

<b>Syntax</b>	show isis adjacency <system-id> <brief   detail   extensive> <instance <i>instance-name</i> > <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches and QFX Series)</b>	show isis adjacency <system-id> <brief   detail   extensive> <instance <i>instance-name</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Display information about IS-IS neighbors.
<b>Options</b>	<p><b>none</b>—Display standard information about IS-IS neighbors for all routing instances.</p> <p><b>system id</b>—(Optional) Display information about IS-IS neighbors for the specified intermediate system.</p> <p><b>brief   detail   extensive</b>—(Optional) Display standard information about IS-IS neighbors with the specified level of output.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display information about IS-IS neighbors for the specified routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Display information about IS-IS neighbors for all logical systems or for a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><a href="#">clear isis adjacency on page 3242</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show isis adjacency on page 3253</a> <a href="#">show isis adjacency brief on page 3253</a> <a href="#">show isis adjacency detail on page 3253</a> <a href="#">show isis adjacency extensive on page 3253</a>
<b>Output Fields</b>	Table 213 on page 3250 describes the output fields for the <b>show isis adjacency</b> command. Output fields are listed in the approximate order in which they appear.

Table 213: show isis adjacency Output Fields

Field Name	Field Description	Level of Output
Interface	Interface through which the neighbor is reachable.	All levels



Table 213: show isis adjacency Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>System</b>	System identifier ( <b>sysid</b> ), displayed as a name, if possible.	<b>brief</b>
<b>L or Level</b>	Level: <ul style="list-style-type: none"> <li>• 1—Level 1 only</li> <li>• 2—Level 2 only</li> <li>• 3—Level 1 and Level 2</li> </ul> An exclamation point (!) preceding the level number indicates that the adjacency is missing an IP address.	All levels
<b>State</b>	State of the adjacency: <b>Up</b> , <b>Down</b> , <b>New</b> , <b>One-way</b> , <b>Initializing</b> , or <b>Rejected</b> .	All levels
<b>Hold (secs)</b>	Remaining hold time of the adjacency.	<b>brief</b>
<b>SNPA</b>	Subnetwork point of attachment (MAC address of the next hop).	<b>brief</b>
<b>Expires in</b>	How long until the adjacency expires, in seconds.	<b>detail</b>
<b>Priority</b>	Priority to become the designated intermediate system.	<b>detail extensive</b>
<b>Up/Down transitions</b>	Count of adjacency status changes from <b>Up</b> to <b>Down</b> or from <b>Down</b> to <b>Up</b> .	<b>detail</b>
<b>Last transition</b>	Time of the last <b>Up/Down</b> transition.	<b>detail</b>
<b>Circuit type</b>	Bit mask of levels on this interface: 1=Level 1 router; 2=Level 2 router; 3=both Level 1 and Level 2 router.	<b>detail</b>
<b>Speaks</b>	Protocols supported by this neighbor.	<b>detail extensive</b>
<b>MAC address</b>	MAC address of the interface.	<b>detail extensive</b>
<b>Topologies</b>	Supported topologies.	<b>detail extensive</b>
<b>Restart capable</b>	Whether a neighbor is capable of graceful restart: <b>Yes</b> or <b>No</b> .	<b>detail extensive</b>
<b>Adjacency advertisement: Advertise</b>	This router has signaled to advertise this interface to its neighbors in their link-state PDUs.	<b>detail extensive</b>
<b>Adjacency advertisement: Suppress</b>	This neighbor has signaled not to advertise the interface in the router's outbound link-state PDUs.	<b>detail extensive</b>
<b>IP addresses</b>	IP address of this neighbor.	<b>detail extensive</b>



Table 213: show isis adjacency Output Fields (*continued*)

Field Name	Field Description	Level of Output
Transition log	<p>List of recent transitions, including:</p> <ul style="list-style-type: none"> <li>• <b>When</b>—Time at which an IS-IS adjacency transition occurred.</li> <li>• <b>State</b>—Current state of the IS-IS adjacency (<b>up</b>, <b>down</b>, or <b>rejected</b>). <ul style="list-style-type: none"> <li>• <b>Up</b>—Adjacency is up and operational.</li> <li>• <b>Down</b>—Adjacency is down and not available.</li> <li>• <b>Rejected</b>—Adjacency has been rejected.</li> </ul> </li> <li>• <b>Event</b>—Type of transition that occurred. <ul style="list-style-type: none"> <li>• <b>Seenself</b>—Possible routing loop has been detected.</li> <li>• <b>Interface down</b>—IS-IS interface has gone down and is no longer available.</li> <li>• <b>Error</b>—Adjacency error.</li> </ul> </li> <li>• <b>Down reason</b>—Reason that an IS-IS adjacency is down: <ul style="list-style-type: none"> <li>• <b>3-Way Handshake Failed</b>—Connection establishment failed.</li> <li>• <b>Address Mismatch</b>—Address mismatch caused link failure.</li> <li>• <b>Aged Out</b>—Link expired.</li> <li>• <b>ISO Area Mismatch</b>—IS-IS area mismatch caused link failure.</li> <li>• <b>Bad Hello</b>—Unacceptable hello message caused link failure.</li> <li>• <b>BFD Session Down</b>—Bidirectional failure detection caused link failure.</li> <li>• <b>Interface Disabled</b>—IS-IS interface is disabled.</li> <li>• <b>Interface Down</b>—IS-IS interface is unavailable.</li> <li>• <b>Interface Level Disabled</b>—IS-IS level is disabled.</li> <li>• <b>Level Changed</b>—IS-IS level has changed on the adjacency.</li> <li>• <b>Level Mismatch</b>—Levels on adjacency are not compatible.</li> <li>• <b>MPLS LSP Down</b>—Label-switched path (LSP) is unavailable.</li> <li>• <b>MT Topology Changed</b>—IS-IS topology has changed.</li> <li>• <b>MT Topology Mismatch</b>—IS-IS topology is mismatched.</li> <li>• <b>Remote System ID Changed</b>—Adjacency peer system ID changed.</li> <li>• <b>Protocol Shutdown</b>—IS-IS protocol is disabled.</li> <li>• <b>CLI Command</b>—Adjacency brought down by user.</li> <li>• <b>Unknown</b>—Unknown.</li> </ul> </li> </ul>	extensive



## Sample Output

### show isis adjacency

```
user@host> show isis adjacency
Interface          System      L State      Hold (secs) SNPA
at-2/3/0.0         ranier      3 Up          23
```

### show isis adjacency brief

The output for the **show isis adjacency brief** command is identical to that for the **show isis adjacency** command. For sample output, see [show isis adjacency on page 3253](#).

### show isis adjacency detail

```
user@host> show isis adjacency detail
ranier
  Interface: at-2/3/0.0, Level: 3, State: Up, Expires in 21 secs
  Priority: 0, Up/Down transitions: 1, Last transition: 00:01:09 ago
  Circuit type: 3, Speaks: IP, IPv6
  Topologies: Unicast
  Restart capable: Yes
  IP addresses: 11.1.1.2
```

### show isis adjacency extensive

```
user@host> show isis adjacency extensive
ranier
  Interface: at-2/3/0.0, Level: 3, State: Up, Expires in 22 secs
  Priority: 0, Up/Down transitions: 1, Last transition: 00:01:16 ago
  Circuit type: 3, Speaks: IP, IPv6
  Topologies: Unicast
  Restart capable: Yes
  IP addresses: 11.1.1.2
  Transition log:
    When          State      Event          Down reason
    Wed Nov  8 21:24:25  Up        Seenself
```



## show isis authentication

<b>Syntax</b>	show isis authentication <instance <i>instance-name</i> > <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches and QFX Series)</b>	show isis authentication <instance <i>instance-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 7.5. Command introduced in Junos OS Release 9.0 for EX Series switches. Support for hitless authentication key rollover introduced in Junos OS Release 11.2. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Display information about IS-IS authentication.
<b>Options</b>	<p><b>none</b>—Display information about IS-IS authentication.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display IS-IS authentication for the specified routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show isis authentication on page 3255</a> <a href="#">show isis authentication (With Hitless Authentication Key Rollover Configured) on page 3255</a>
<b>Output Fields</b>	Table 214 on page 3254 describes the output fields for the <b>show isis authentication</b> command. Output fields are listed in the approximate order in which they appear.

**Table 214: show isis authentication Output Fields**

Field Name	Field Description
<b>Interface</b>	Interface name.
<b>Level</b>	IS-IS level.
<b>IIH Auth</b>	IS-IS Hello (IIH) packet authentication type.  Displays the name of the active keychain if hitless authentication key rollover is configured.
<b>CSN Auth</b>	Complete sequence number authentication type.
<b>PSN Auth</b>	Partial sequence number authentication type.



Table 214: show isis authentication Output Fields (*continued*)

Field Name	Field Description
<b>L1 LSP Authentication</b>	Layer 1 link-state PDU authentication type.
<b>L2 LSP Authentication</b>	Layer 2 link-state PDU authentication type.

## Sample Output

### show isis authentication

```
user@host> show isis authentication
Interface          Level IIH Auth  CSN Auth  PSN Auth
at-2/3/0.0         1      Simple    Simple    Simple
                   2      MD5       MD5       MD5

L1 LSP Authentication: Simple
L2 LSP Authentication: MD5
```

### show isis authentication (With Hitless Authentication Key Rollover Configured)

```
user@host> show isis authentication
Interface          Level IIH Auth  CSN Auth  PSN Auth
so-0/1/3.0         2      hakrhello MD5       MD5

L2 LSP Authentication: MD5
```



## show isis database

---

<b>Syntax</b>	<code>show isis database</code> <code>&lt;system-id&gt;</code> <code>&lt;brief   detail   extensive&gt;</code> <code>&lt;instance <i>instance-name</i>&gt;</code> <code>&lt;level (1   2)&gt;</code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>
<b>Syntax (EX Series Switches and QFX Series)</b>	<code>show isis database</code> <code>&lt;system-id&gt;</code> <code>&lt;brief   detail   extensive&gt;</code> <code>&lt;level (1   2)&gt;</code> <code>&lt;instance <i>instance-name</i>&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Display the entries in the IS-IS link-state database, which contains data about PDU packets.
<b>Options</b>	<p><b>none</b>—Display standard information about IS-IS link-state database entries for all routing instances.</p> <p><b><i>system id</i></b>—(Optional) Display IS-IS link-state database entries for the specified intermediate system.</p> <p><b>brief   detail   extensive</b>—(Optional) Display the specified level of output.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display IS-IS link-state database entries for the specified routing instance.</p> <p><b>level (1   2)</b>—(Optional) Display IS-IS link-state database entries for the specified IS-IS level.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Display standard information about IS-IS link-state database entries for all logical systems or for a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">clear isis database on page 3244</a></li></ul>
<b>List of Sample Output</b>	<a href="#">show isis database on page 3259</a> <a href="#">show isis database brief on page 3259</a> <a href="#">show isis database detail on page 3259</a> <a href="#">show isis database extensive on page 3260</a>



**Output Fields** Table 215 on page 3257 describes the output fields for the **show isis database** command. Output fields are listed in the approximate order in which they appear. Fields that contain internal IS-IS information useful only in troubleshooting obscure problems are not described in the table. For more details about these fields, contact your customer support representative.

**Table 215: show isis database Output Fields**

Field Name	Field Description	Level of Output
<b>Interface name</b>	Name of the interface on which the link-state PDU has been received; always <b>IS-IS</b> for this command.	All levels
<b>level</b>	Level of intermediate system: <ul style="list-style-type: none"> <li>• <b>1</b>—Intermediate system routes within an area; when the destination is outside an area, it routes toward a Level 2 system.</li> <li>• <b>2</b>—Intermediate system routes between areas and toward other ASs.</li> </ul>	All levels
<b>LSP ID</b>	Link-state PDU identifier.	All levels
<b>Sequence</b>	Sequence number of the link-state PDU.	All levels
<b>Checksum</b>	Checksum value of the link-state PDU.	All levels
<b>Lifetime (secs)</b>	Remaining lifetime of the link-state PDU, in seconds.	All levels
<b>Attributes</b>	Attributes of the specified database: <b>L1</b> , <b>L2</b> , <b>Overload</b> , or <b>Attached</b> (L1 only).	none <b>brief</b>
<b># LSPs</b>	Total number of link-state PDUs in the specified link-state database.	none <b>brief</b>
<b>IP prefix</b>	Prefix advertised by this link-state PDU.	<b>detail extensive</b>
<b>IS neighbor</b>	IS-IS neighbor of the advertising system.	<b>detail extensive</b>
<b>ES neighbor</b>	(J Series routers only) An ES-IS neighbor of the advertising system.	<b>detail extensive</b>
<b>IP prefix</b>	IPv4 prefix advertised by this link-state PDU.	<b>detail extensive</b>
<b>V6 prefix</b>	IPv6 prefix advertised by this link-state PDU.	<b>detail extensive</b>
<b>Metric</b>	Metric of the prefix or neighbor.	<b>detail extensive</b>
<b>Header</b>	<ul style="list-style-type: none"> <li>• <b>LSP ID</b>—Link state PDU identifier of the header.</li> <li>• <b>Length</b>—Header length.</li> <li>• <b>Allocated Length</b>—Amount of length available for the header.</li> <li>• <b>Router ID</b>—Address of the local routing device.</li> <li>• <b>Remaining Lifetime</b>—Remaining lifetime of the link-state PDU, in seconds.</li> </ul>	<b>extensive</b>



Table 215: show isis database Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Packet</b>	<ul style="list-style-type: none"> <li>• <b>LSP ID</b>—The identifier for the link-state PDU.</li> <li>• <b>Length</b>—Packet length.</li> <li>• <b>Lifetime</b>—Remaining lifetime, in seconds.</li> <li>• <b>Checksum</b>—The checksum of the link-state PDU.</li> <li>• <b>Sequence</b>—The sequence number of the link-state PDU. Every time the link-state PDU is updated, this number increments.</li> <li>• <b>Attributes</b>—Packet attributes.</li> <li>• <b>NLPID</b>—Network layer protocol identifier.</li> <li>• <b>Fixed length</b>—Specifies the set length for the packet.</li> </ul>	<b>extensive</b>
<b>TLVs</b>	<ul style="list-style-type: none"> <li>• <b>Area Address</b>—Area addresses that the routing device can reach.</li> <li>• <b>Speaks</b>—Supported routing protocols.</li> <li>• <b>IP router id</b>—ID of the routing device (usually the IP address).</li> <li>• <b>IP address</b>—IPv4 address.</li> <li>• <b>Hostname</b>—Assigned name of the routing device.</li> <li>• <b>IP prefix</b>—IP prefix of the routing device.</li> <li>• <b>Metric</b>—IS-IS metric that measures the cost of the adjacency between the originating routing device and the advertised routing device.</li> <li>• <b>IP extended prefix</b>—Extended IP prefix of the routing device.</li> <li>• <b>IS neighbor</b>—Directly attached neighbor's name and metric.</li> <li>• <b>IS extended neighbor</b>—Directly attached neighbor's name, metric, and IP address.</li> </ul>	<b>extensive</b>



## Sample Output

### show isis database

```
user@host> show isis database
IS-IS level 1 link-state database:
LSP ID                Sequence Checksum Lifetime Attributes
kobuk.00-00           0x3    0x3167    1057 L1 L2
camaro.00-00          0x5    0x770e    1091 L1 L2
ranier.00-00          0x4    0xaa95    1091 L1 L2
glacier.00-00         0x4    0x206f    1089 L1 L2
glacier.02-00         0x1    0xd141    1089 L1 L2
badlands.00-00        0x3    0x87a2    1093 L1 L2
6 LSPs

IS-IS level 2 link-state database:
LSP ID                Sequence Checksum Lifetime Attributes
kobuk.00-00           0x6    0x8d6b    1096 L1 L2
camaro.00-00          0x9    0x877b    1101 L1 L2
ranier.00-00          0x8    0x855d    1103 L1 L2
glacier.00-00         0x7    0xf892    1098 L1 L2
glacier.02-00         0x1    0xd141    1089 L1 L2
badlands.00-00        0x6    0x562    1105 L1 L2
6 LSPs
```

### show isis database brief

The output for the **show isis database brief** command is identical to that for the **show isis database** command. For sample output, see [show isis database on page 3259](#).

### show isis database detail

```
user@host> show isis database logical-system CE3 sisira.00-00 detail

IS-IS level 1 link-state database:

sisira.00-00 Sequence: 0x11, Checksum: 0x10fc, Lifetime: 975 secs
  IS neighbor: hemantha-CE3.02           Metric:      10
  ES neighbor: 0015.0015.0015             Metric:      10 Down
  ES neighbor: 0025.0025.0025             Metric:      10 Down
  ES neighbor: 0030.0030.0030             Metric:      10 Down
  ES neighbor: 0040.0040.0040             Metric:      10 Down
  ES neighbor: sisira                     Metric:      0
  IP prefix: 1.0.0.0/24                   Metric:      10 External Down
  IP prefix: 3.0.0.0/24                   Metric:      10 External Down
  IP prefix: 4.0.0.0/24                   Metric:      10 External Down
  IP prefix: 5.0.0.0/24                   Metric:      10 Internal Up
  IP prefix: 15.15.15.15/32               Metric:      10 External Down
  IP prefix: 25.25.25.25/32               Metric:      10 External Down
  IP prefix: 30.30.30.30/32               Metric:      10 External Down
  IP prefix: 40.40.40.40/32               Metric:      10 External Down
  IP prefix: 60.60.60.60/32               Metric:      0 Internal Up

IS-IS level 2 link-state database:

sisira.00-00 Sequence: 0x13, Checksum: 0x69ac, Lifetime: 993 secs
  IS neighbor: hemantha-CE3.02           Metric:      10
  IP prefix: 1.0.0.0/24                   Metric:      10 External Down
  IP prefix: 3.0.0.0/24                   Metric:      10 External Down
  IP prefix: 4.0.0.0/24                   Metric:      10 External Down
  IP prefix: 5.0.0.0/24                   Metric:      10 Internal Up
  IP prefix: 15.15.15.15/32               Metric:      10 External Down
  IP prefix: 25.25.25.25/32               Metric:      10 External Down
  IP prefix: 30.30.30.30/32               Metric:      10 External Down
```



```

IP prefix: 40.40.40.40/32          Metric:      10 External Down
IP prefix: 50.50.50.50/32          Metric:      10 Internal Up
IP prefix: 60.60.60.60/32          Metric:       0 Internal Up
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0015.0015.0015/152
                                          Metric:      10 External Down
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0025.0025.0025/152
                                          Metric:      10 External Down
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0030.0030.0030/152
                                          Metric:      10 External Down
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0040.0040.0040/152
                                          Metric:      10 External Down
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0060.0060.0060/152
                                          Metric:       0 Internal Up

```

### show isis database extensive

```
user@host> show isis database logical-system CE3 sisira.00-00 extensive
```

IS-IS level 1 link-state database:

```

sisira.00-00 Sequence: 0x11, Checksum: 0x10fc, Lifetime: 970 secs
  IS neighbor: hemantha-CE3.02          Metric:      10
    Two-way fragment: hemantha-CE3.02-00, Two-way first fragment:
hemantha-CE3.02-00
  ES neighbor: 0015.0015.0015          Metric:      10 Down
  ES neighbor: 0025.0025.0025          Metric:      10 Down
  ES neighbor: 0030.0030.0030          Metric:      10 Down
  ES neighbor: 0040.0040.0040          Metric:      10 Down
  ES neighbor: sisira                  Metric:       0
  IP prefix: 1.0.0.0/24                Metric:      10 External Down
  IP prefix: 3.0.0.0/24                Metric:      10 External Down
  IP prefix: 4.0.0.0/24                Metric:      10 External Down
  IP prefix: 5.0.0.0/24                Metric:      10 Internal Up
  IP prefix: 15.15.15.15/32            Metric:      10 External Down
  IP prefix: 25.25.25.25/32            Metric:      10 External Down
  IP prefix: 30.30.30.30/32            Metric:      10 External Down
  IP prefix: 40.40.40.40/32            Metric:      10 External Down
  IP prefix: 60.60.60.60/32            Metric:       0 Internal Up

```

```

Header: LSP ID: sisira.00-00, Length: 336 bytes
  Allocated length: 336 bytes, Router ID: 0.0.0.0
  Remaining lifetime: 970 secs, Level: 1, Interface: 333
  Estimated free bytes: 144, Actual free bytes: 0
  Aging timer expires in: 970 secs
  Protocols: IP, IPv6, CLNS

```

```

Packet: LSP ID: sisira.00-00, Length: 336 bytes, Lifetime : 1198 secs
  Checksum: 0x10fc, Sequence: 0x11, Attributes: 0xb L1 L2 Attached
  NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
  Packet type: 18, Packet version: 1, Max area: 0

```

TLVs:

```

Area address: 60.0006.80ff.f800.0000.0108.0001 (13)
Speaks: IP
Speaks: IPV6
Speaks: CLNP
Hostname: sisira
ES neighbor TLV: Internal, Metric: default 0, Up
  ES: sisira
IS neighbor: hemantha-CE3.02, Internal, Metric: default 10
IS extended neighbor: hemantha-CE3.02, Metric: default 10
ES neighbor TLV: External, Metric: default 10, Down
  ES: 0040.0040.0040

```



```

ES neighbor TLV: External, Metric: default 10, Down
ES: 0025.0025.0025
ES neighbor TLV: External, Metric: default 10, Down
ES: 0015.0015.0015
ES neighbor TLV: External, Metric: default 10, Down
ES: 0030.0030.0030
IP external prefix: 3.0.0.0/24, Internal, Metric: default 10, Down
IP external prefix: 40.40.40.40/32, Internal, Metric: default 10, Down
IP external prefix: 4.0.0.0/24, Internal, Metric: default 10, Down
IP external prefix: 25.25.25.25/32, Internal, Metric: default 10, Down
IP external prefix: 15.15.15.15/32, Internal, Metric: default 10, Down
IP external prefix: 1.0.0.0/24, Internal, Metric: default 10, Down
IP external prefix: 30.30.30.30/32, Internal, Metric: default 10, Down
IP extended prefix: 3.0.0.0/24 metric 10 down
IP extended prefix: 40.40.40.40/32 metric 10 down
IP extended prefix: 4.0.0.0/24 metric 10 down
IP extended prefix: 25.25.25.25/32 metric 10 down
IP extended prefix: 15.15.15.15/32 metric 10 down
IP extended prefix: 1.0.0.0/24 metric 10 down
IP extended prefix: 30.30.30.30/32 metric 10 down
IP prefix: 60.60.60.60/32, Internal, Metric: default 0, Up
IP prefix: 5.0.0.0/24, Internal, Metric: default 10, Up
IP extended prefix: 60.60.60.60/32 metric 0 up
IP extended prefix: 5.0.0.0/24 metric 10 up
No queued transmissions

```

#### IS-IS level 2 link-state database:

```

sisira.00-00 Sequence: 0x13, Checksum: 0x69ac, Lifetime: 988 secs
IS neighbor: hemantha-CE3.02 Metric: 10
Two-way fragment: hemantha-CE3.02-00, Two-way first fragment:
hemantha-CE3.02-00
IP prefix: 1.0.0.0/24 Metric: 10 External Down
IP prefix: 3.0.0.0/24 Metric: 10 External Down
IP prefix: 4.0.0.0/24 Metric: 10 External Down
IP prefix: 5.0.0.0/24 Metric: 10 Internal Up
IP prefix: 15.15.15.15/32 Metric: 10 External Down
IP prefix: 25.25.25.25/32 Metric: 10 External Down
IP prefix: 30.30.30.30/32 Metric: 10 External Down
IP prefix: 40.40.40.40/32 Metric: 10 External Down
IP prefix: 50.50.50.50/32 Metric: 10 Internal Up
IP prefix: 60.60.60.60/32 Metric: 0 Internal Up
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0015.0015.0015/152
Metric: 10 External Down
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0025.0025.0025/152
Metric: 10 External Down
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0030.0030.0030/152
Metric: 10 External Down
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0040.0040.0040/152
Metric: 10 External Down
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0060.0060.0060/152
Metric: 0 Internal Up

```

```

Header: LSP ID: sisira.00-00, Length: 427 bytes
Allocated length: 427 bytes, Router ID: 0.0.0.0
Remaining lifetime: 988 secs, Level: 2, Interface: 333
Estimated free bytes: 130, Actual free bytes: 0
Aging timer expires in: 988 secs
Protocols: IP, IPv6, CLNS

```

```

Packet: LSP ID: sisira.00-00, Length: 427 bytes, Lifetime : 1198 secs

```



Checksum: 0x69ac, Sequence: 0x13, Attributes: 0x3 L1 L2  
NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes  
Packet type: 20, Packet version: 1, Max area: 0

TLVs:

Area address: 60.0006.80ff.f800.0000.0108.0001 (13)  
Speaks: IP  
Speaks: IPV6  
Speaks: CLNP  
Hostname: sisira  
IS neighbor: hemantha-CE3.02, Internal, Metric: default 10  
IS extended neighbor: hemantha-CE3.02, Metric: default 10  
IP external prefix: 3.0.0.0/24, Internal, Metric: default 10, Down  
IP external prefix: 40.40.40.40/32, Internal, Metric: default 10, Down  
IP external prefix: 4.0.0.0/24, Internal, Metric: default 10, Down  
IP external prefix: 25.25.25.25/32, Internal, Metric: default 10, Down  
IP external prefix: 15.15.15.15/32, Internal, Metric: default 10, Down  
IP external prefix: 1.0.0.0/24, Internal, Metric: default 10, Down  
IP external prefix: 30.30.30.30/32, Internal, Metric: default 10, Down  
IP extended prefix: 3.0.0.0/24 metric 10 down  
IP extended prefix: 40.40.40.40/32 metric 10 down  
IP extended prefix: 4.0.0.0/24 metric 10 down  
IP extended prefix: 25.25.25.25/32 metric 10 down  
IP extended prefix: 15.15.15.15/32 metric 10 down  
IP extended prefix: 1.0.0.0/24 metric 10 down  
IP extended prefix: 30.30.30.30/32 metric 10 down  
ISO prefix-neighbor TLV: Internal, Metric: default 0, Up  
Prefix : 60.0006.80ff.f800.0000.0108.0001.0060.0060.0060/152  
ISO prefix-neighbor TLV: External, Metric: default 10, Down  
Prefix : 60.0006.80ff.f800.0000.0108.0001.0040.0040.0040/152  
ISO prefix-neighbor TLV: External, Metric: default 10, Down  
Prefix : 60.0006.80ff.f800.0000.0108.0001.0025.0025.0025/152  
ISO prefix-neighbor TLV: External, Metric: default 10, Down  
Prefix : 60.0006.80ff.f800.0000.0108.0001.0015.0015.0015/152  
ISO prefix-neighbor TLV: External, Metric: default 10, Down  
Prefix : 60.0006.80ff.f800.0000.0108.0001.0030.0030.0030/152  
IP prefix: 60.60.60.60/32, Internal, Metric: default 0, Up  
IP prefix: 5.0.0.0/24, Internal, Metric: default 10, Up  
IP prefix: 50.50.50.50/32, Internal, Metric: default 10, Up  
IP extended prefix: 60.60.60.60/32 metric 0 up  
IP extended prefix: 5.0.0.0/24 metric 10 up  
IP extended prefix: 50.50.50.50/32 metric 10 up

No queued transmissions



## show isis hostname

<b>Syntax</b>	show isis hostname <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches and QFX Series)</b>	show isis hostname
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Display IS-IS hostname database information.
<b>Options</b>	<p><b>none</b>—Display IS-IS hostname database information.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show isis hostname on page 3263</a>
<b>Output Fields</b>	<a href="#">Table 216 on page 3263</a> describes the output fields for the <b>show isis hostname</b> command. Output fields are listed in the approximate order in which they appear.

**Table 216: show isis hostname Output Fields**

Field Name	Field Description
<b>System Id</b>	System identifier mapped to the hostname.
<b>Hostname</b>	Hostname mapped to the system identifier.
<b>Type</b>	<p>Type of mapping between system identifier and hostname.</p> <ul style="list-style-type: none"> <li><b>Dynamic</b>—Hostname mapping determined as described in RFC 2763, <i>Dynamic Hostname Exchange Mechanism for IS-IS</i>.</li> <li><b>Static</b>—Hostname mapping configured by user.</li> </ul>

## Sample Output

```

show isis hostname      user@host> show isis hostname
                        IS-IS hostname database:
                        System Id      Hostname
                        1921.6800.4201 isis1
                        1921.6800.4202 isis2
                        1921.6800.4203 isis3
                        Type
                        Dynamic
                        Static
                        Dynamic

```



## show isis interface

<b>Syntax</b>	<pre>show isis interface &lt;brief   detail   extensive&gt; &lt;interface-name&gt; &lt;logical-system (all   logical-system-name)&gt;</pre>
<b>Syntax (EX Series Switches and QFX Series)</b>	<pre>show isis interface &lt;brief   detail   extensive&gt; &lt;interface-name&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	<p>Display status information about IS-IS-enabled interfaces.</p> <div data-bbox="474 823 542 890" data-label="Image"> </div> <div data-bbox="584 867 1421 1029" data-label="Text"> <p><b>NOTE:</b> If the configured metric for an IS-IS level is above 63, and the <b>wide-metrics-only</b> statement is not configured, the <b>show isis interface detail</b> command and the <b>show isis interface extensive</b> command display 63 as the metric value for that level. Configure the <b>wide-metrics-only</b> statement to generate metric values greater than 63 on a per IS-IS level basis.</p> </div> <div data-bbox="584 1058 1432 1119" data-label="Text"> <p>The <b>show isis interface</b> command displays the configured metric value for an IS-IS level irrespective of whether is configured or not.</p> </div>
<b>Options</b>	<p><b>none</b>—Display standard information about all IS-IS-enabled interfaces.</p> <p><b>brief   detail   extensive</b>—(Optional) Display the specified level of output.</p> <p><b>interface-name</b>—(Optional) Display information about the specified interface only.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Example: Enabling Wide IS-IS Metrics for Traffic Engineering</li> </ul>
<b>List of Sample Output</b>	<p><a href="#">show isis interface on page 3267</a></p> <p><a href="#">show isis interface brief on page 3267</a></p> <p><a href="#">show isis interface detail on page 3267</a></p> <p><a href="#">show isis interface extensive on page 3267</a></p> <p><a href="#">show isis interface extensive (With LDP) on page 3267</a></p>
<b>Output Fields</b>	<p>Table 217 on page 3265 describes the output fields for the <b>show isis interface</b> command. Output fields are listed in the approximate order in which they appear.</p>



Table 217: show isis interface Output Fields

Field Name	Field Description	Level of Output
<i>interface-name</i>	Name of the interface.	<b>detail</b>
<b>Designated router</b>	Routing device selected by other routers that is responsible for sending link-state advertisements that describe the network. Used only on broadcast networks.	<b>detail</b>
<b>Index</b>	Interface index assigned by the Junos OS kernel.	<b>detail</b>
<b>State</b>	Internal implementation information.	<b>detail</b>
<b>Circuit id</b>	Circuit identifier.	<b>detail</b>
<b>Circuit type</b>	Circuit type: <ul style="list-style-type: none"> <li>• 1—Level 1 only</li> <li>• 2—Level 2 only</li> <li>• 3—Level 1 and Level 2</li> </ul>	<b>detail</b>
<b>LSP interval</b>	Interval between link-state PDUs sent from the interface.	<b>detail</b>
<b>CSNP interval</b>	Interval between complete sequence number PDUs sent from the interface.	<b>detail extensive</b>
<b>Sysid</b>	System identifier.	<b>detail</b>
<b>Interface</b>	Interface through which the adjacency is made.	<b>none brief</b>
<b>L or Level</b>	Level: <ul style="list-style-type: none"> <li>• 1—Level 1 only</li> <li>• 2—Level 2 only</li> <li>• 3—Level 1 and Level 2</li> </ul>	All levels
<b>CirID</b>	Circuit identifier.	<b>none brief</b>
<b>Level 1 DR</b>	Level 1 designated intermediate system.	<b>none brief</b>
<b>Level 2 DR</b>	Level 2 designated intermediate system.	<b>none brief</b>
<b>L1/L2 Metric</b>	Interface's metric for Level 1 and Level 2. If there is no information, the metric is 0.	<b>none brief</b>
<b>Adjacency advertisement: Advertise</b>	This routing device has signaled to advertise this interface to its neighbors in their label-switched paths (LSPs).	<b>detail extensive</b>
<b>Adjacency advertisement: Suppress</b>	This neighbor has signaled not to advertise this interface in the routing device's outbound LSPs.	<b>detail extensive</b>
<b>Adjacencies</b>	Number of adjacencies established on this interface.	<b>detail</b>



Table 217: show isis interface Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Priority</b>	Priority value for this interface.	<b>detail</b>
<b>Metric</b>	Metric value for this interface.	<b>detail</b>
<b>Hello(s) / Hello Interval</b>	Interface's hello interval.	<b>detail extensive</b>
<b>Hold(s) / Hold Time</b>	Interface's hold time.	<b>detail extensive</b>
<b>Designated Router</b>	Router responsible for sending network link-state advertisements, which describe all the routers attached to the network.	<b>detail</b>
<b>Hello padding</b>	Type of hello padding: <ul style="list-style-type: none"> <li>• <b>Adaptive</b>—On point-to-point connections, the hello packets are padded from the initial detection of a new neighbor until the neighbor verifies the adjacency as Up in the adjacency state TLV. If the neighbor does not support the adjacency state TLV, then padding continues. On LAN connections, padding starts from the initial detection of a new neighbor until there is at least one active adjacency on the interface.</li> <li>• <b>Loose</b>—(Default) The hello packet is padded from the initial detection of a new neighbor until the adjacency transitions to the Up state.</li> <li>• <b>Strict</b>—Padding is performed on all interface types and for all adjacency states, and is continuous.</li> </ul>	<b>extensive</b>
<b>LDP sync state</b>	Current LDP synchronization state: <b>in sync</b> , <b>in holddown</b> , or <b>not supported</b> .	<b>extensive</b>
<b>reason</b>	Reason for being in the LDP sync state.	<b>extensive</b>
<b>config holdtime</b>	Configured value of the hold timer.	<b>extensive</b>
<b>remaining</b>	If the state is not in sync and the hold time is not infinity, then this field displays the remaining hold time in seconds.	<b>extensive</b>



## Sample Output

### show isis interface

```
user@host> show isis interface
IS-IS interface database:
Interface          L CirID Level 1 DR      Level 2 DR      L1/L2 Metric
at-2/3/0.0         3   0x1 Point to Point    Point to Point    10/10
lo0.0              0   0x1 Passive           Passive           0/0
```

### show isis interface brief

The output for the **show isis interface brief** command is identical to that for the **show isis interface** command. For sample output, see [show isis interface on page 3267](#).

### show isis interface detail

```
user@host> show isis interface detail
IS-IS interface database:
at-2/3/0.0
  Index: 66, State: 0x6, Circuit id: 0x1, Circuit type: 3
  LSP interval: 100 ms, CSNP interval: 5 s
  Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
    1                1      64     10     9.000     27
    2                1      64     10     9.000     27
lo0.0
  Index: 64, State: 0x6, Circuit id: 0x1, Circuit type: 0
  LSP interval: 100 ms, CSNP interval: disabled
  Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
    1                0      64      0 Passive
    2                0      64      0 Passive
```

### show isis interface extensive

```
user@host> show isis interface extensive
IS-IS interface database:
at-2/3/0.0
  Index: 66, State: 0x6, Circuit id: 0x1, Circuit type: 3
  LSP interval: 100 ms, CSNP interval: 5 s, Loose Hello padding
  Level 1
    Adjacencies: 1, Priority: 64, Metric: 10
    Hello Interval: 9.000 s, Hold Time: 27 s
  Level 2
    Adjacencies: 1, Priority: 64, Metric: 10
    Hello Interval: 9.000 s, Hold Time: 27 s
lo0.0
  Index: 64, State: 0x6, Circuit id: 0x1, Circuit type: 0
  LSP interval: 100 ms, CSNP interval: disabled, Loose Hello padding
  Level 1
    Adjacencies: 0, Priority: 64, Metric: 0
    Passive
  Level 2
    Adjacencies: 0, Priority: 64, Metric: 0
    Passive
```

### show isis interface extensive (With LDP)

```
user@host> show isis interface extensive
IS-IS interface database:
so-1/1/2.0
  Index: 114, State: 0x6, Circuit id: 0x1, Circuit type: 2
  LSP interval: 100 ms, CSNP interval: 20 s, Loose Hello padding
  Adjacency advertisement: Advertise
  LDP sync state: in sync, for: 00:01:28, reason: LDP up during config
  config holdtime: 20 seconds
```



Level 2

Adjacencies: 1, Priority: 64, Metric: 11  
Hello Interval: 9.000 s, Hold Time: 27 s  
IPV4 MulticastMetric: 10  
IPV6 UnicastMetric: 10



## show isis overview

<b>Syntax</b>	<b>show isis overview</b> <instance <i>instance-name</i> > <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches and QFX Series)</b>	<b>show isis overview</b> <instance <i>instance-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 8.5. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Display IS-IS overview information.
<b>Options</b>	<b>none</b> —Display standard overview information about IS-IS for all routing instances.  <b>instance <i>instance-name</i></b> —(Optional) Display overview information for the specified routing instance.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show isis overview on page 3271</a>
<b>Output Fields</b>	<a href="#">Table 218 on page 3269</a> lists the output fields for the <b>show isis overview</b> command. Output fields are listed in the approximate order in which they appear.

**Table 218: show isis overview Output Fields**

Field Name	Field Description
Instance	IS-IS routing instance.
Router ID	Router ID of the routing device.
Adjacency holddown	Adjacency holddown capability: <b>enabled</b> or <b>disabled</b> .
Maximum Areas	Maximum number of IS-IS areas advertised by the routing device.
LSP life time	Lifetime of the link-state PDU, in seconds.
Attached bit evaluation	Attached bit capability: <b>enabled</b> or <b>disabled</b> .
SPF delay	Delay before performing consecutive shortest-path-first (SPF) calculations.
SPF holddown	Delay before performing additional SPF calculations after the maximum number of consecutive SPF calculations is reached.



Table 218: show isis overview Output Fields (*continued*)

Field Name	Field Description
SPF rapid runs	Maximum number of SPF calculations that can be performed in succession before the holddown timer begins.
Overload bit at startup is set	Overload bit capability is enabled.
Overload high metrics	Overload high metrics capability: <b>enabled</b> or <b>disabled</b> .
Overload timeout	Time period after which overload is reset and the time that remains before the timer is set to expire.
Traffic engineering	Traffic engineering capability: <b>enabled</b> or <b>disabled</b> .
Restart	Graceful restart capability: <b>enabled</b> or <b>disabled</b> .
Restart duration	Time period for complete reacquisition of IS-IS neighbors.
Helper mode	Graceful restart helper capability: <b>enabled</b> or <b>disabled</b> .
Level	IS-IS level: <ul style="list-style-type: none"> <li>• 1—Level 1 information</li> <li>• 2—Level 2 information</li> </ul>
IPv4 is enabled	IP Protocol version 4 capability is enabled.
IPv6 is enabled	IP Protocol version 6 capability is enabled.
CLNS is enabled	(J Series routers only) OSI CLNP capability is enabled.
Internal route preference	Preference value of internal routes.
External route preference	Preference value of external routes.
Wide area metrics are enabled	Wide area metrics capability is enabled.
Narrow metrics are enabled	Narrow metrics capability is enabled.



## Sample Output

show isis overview

```
user@host> show isis overview
Instance: master
Router ID: 192.168.1.220
Adjacency holddown: enabled
Maximum Areas: 3
LSP life time: 65535
Attached bit evaluation: enabled
SPF delay: 200 msec, SPF holddown: 5000 msec, SPF rapid runs: 3
Overload bit at startup is set
  Overload high metrics: disabled
  Overload timeout: 300 sec, expires in 295 seconds
IPv4 is enabled, IPv6 is enabled
Traffic engineering: enabled
Restart: Enabled
  Restart duration: 210 sec
  Helper mode: Enabled
Level 1
  Internal route preference: 15
  External route preference: 160
  Wide metrics are enabled, Narrow metrics are enabled
Level 2
  Internal route preference: 18
  External route preference: 165
  Wide metrics are enabled
```



## show isis route

<b>Syntax</b>	<pre>show isis route &lt;destination&gt; &lt;inet   inet6&gt; &lt;instance instance-name&gt; &lt;logical-system (all   logical-system-name)&gt; &lt;topology (ipv4-multicast   ipv6-multicast   ipv6-unicast   unicast)&gt;</pre>
<b>Syntax (EX Series Switches and QFX Series)</b>	<pre>show isis route &lt;destination&gt; &lt;inet   inet6&gt; &lt;instance instance-name&gt; &lt;topology (ipv4-multicast   ipv6-multicast   ipv6-unicast   unicast)&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 12.1 for the QFX Series.</p>
<b>Description</b>	Display the routes in the IS-IS routing table.
<b>Options</b>	<p><b>none</b>—Display all routes in the IS-IS routing table for all supported address families for all routing instances.</p> <p><b>destination</b>—(Optional) Destination address for the route.</p> <p><b>inet   inet6</b>—(Optional) Display inet (IPv4) or inet6 (IPv6) routes, respectively.</p> <p><b>instance instance-name</b>—(Optional) Display routes for the specified routing instance only.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>topology (ipv4-multicast   ipv6-multicast   ipv6-unicast   unicast)</b>—(Optional) Display routes for the specified topology only, or use unicast to display information, if available, for both IPv4 and IPv6 unicast topologies.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<p><a href="#">show isis route logical-system on page 3274</a></p> <p><a href="#">show isis route (CLNS) on page 3274</a></p> <p><a href="#">show isis route on page 3274</a></p>
<b>Output Fields</b>	<p><a href="#">Table 219 on page 3272</a> describes the output fields for the <b>show isis route</b> command. Output fields are listed in the approximate order in which they appear.</p>

**Table 219: show isis route Output Fields**

Field Name	Field Description
Current version	Number of the current version of the IS-IS routing table.



Table 219: show isis route Output Fields (*continued*)

Field Name	Field Description
<b>L1</b>	Version of Level 1 SPF that was run.
<b>L2</b>	Version of Level 2 SPF that was run.
<b>Prefix</b>	Destination of the route.
<b>L</b>	IS-IS level: <ul style="list-style-type: none"> <li>• 1—Level 1 only</li> <li>• 2—Level 2 only</li> <li>• 3—Level 1 and Level 2</li> </ul>
<b>Version</b>	Version of SPF that generated the route.
<b>Metric</b>	Metric value associated with the route.
<b>Type</b>	Metric type: <b>int</b> (internal) or <b>ext</b> (external).
<b>Interface</b>	Interface to the next hop.
<b>Via</b>	System identifier of the next hop, displayed as a name if possible.
<b>ISO Routes</b>	ISO routing table entries.
<b>snpa</b>	MAC address.



## Sample Output

### show isis route logical-system

```
user@host> show isis route logical-system ls1
IS-IS routing table                      Current version: L1: 8 L2: 11
Prefix          L Version Metric Type Interface  Via
10.9.7.0/30     2      11     20 int  gr-0/2/0.0  h
10.9.201.1/32   2      11     60 int  gr-0/2/0.0  h
IPv6 Unicast IS-IS routing table        Current version: L1: 9 L2: 11
Prefix          L Version Metric Type Interface  Via
8009:3::a09:3200/126 2      11     20 int  gr-0/2/0.0  h
```

### show isis route (CLNS)

```
user@host> show isis route
IS-IS routing table                      Current version: L1: 10 L2: 8
IPv4/IPv6 Routes
Prefix          L Version Metric Type Interface  Via
0.0.0.0/0       1      10     10 int  fe-0/0/1.0  ISIS.0
ISO Routes
Prefix L Version Metric Type Interface  Via snpa
0/0
1      10     10 int  fe-0/0/1.0  isis.0 0:12:0:34:0:56
47.0005.80ff.f800.0000.0108.0001/104
1      10     0 int
47.0005.80ff.f800.0000.0108.0001.1921.6800.4001/152
1      10     10 int  fe-0/0/1.0  isis.0 0:12:0:34:0:56
47.0005.80ff.f800.0000.0108.0001.1921.6800.4002/152
1      10     20 int  fe-0/0/1.0  isis.0 0:12:0:34:0:56
47.0005.80ff.f800.0000.0108.0002/104
1      10     0 int
47.0005.80ff.f800.0000.0108.0002.1921.6800.4001/152
1      10     10 int  fe-0/0/1.0  isis.0 0:12:0:34:0:56
```

### show isis route

```
user@host> show isis route

IS-IS routing table                      Current version: L1: 4 L2: 13
IPv4/IPv6 Routes
-----
Prefix          L Version Metric Type Interface  NH Via
10.255.71.52/32 2      13     10 int  ae0.0          IPV4 camaro
10.255.71.238/32 2      13     20 int  so-6/0/0.0    IPV4 olympic
                  as0.0          IPV4 glacier
10.255.71.239/32 2      13     20 int  so-6/0/0.0    IPV4 olympic
                  ae0.0          IPV4 camaro
10.255.71.242/32 2      13     10 int  as0.0          IPV4 glacier
10.255.71.243/32 2      13     10 int  so-6/0/0.0    IPV4 olympic
12.13.0.0/30     2      13     20 int  so-6/0/0.0    IPV4 olympic
12.15.0.0/30     2      13     20 int  so-6/0/0.0    IPV4 olympic
13.15.0.0/30     2      13     30 int  ae0.0          IPV4 camaro
                  so-6/0/0.0    IPV4 olympic
```



					as0.0	IPV4 glacier
13.16.0.0/30	2	13	25	int	as0.0	IPV4 glacier
14.15.0.0/30	2	13	20	int	ae0.0	IPV4 camaro
192.2.1.0/30	2	13	30	int	so-6/0/0.0	IPV4 olympic
					as0.0	IPV4 glacier
1eee::/64	2	13	30	int	so-6/0/0.0	IPV6 olympic
					as0.0	IPV6 glacier
abcd::10:255:71:52/128	2	13	10	int	ae0.0	IPV6 camaro
abcd::10:255:71:238/128	2	13	20	int	so-6/0/0.0	IPV6 olympic
					as0.0	IPV6 glacier
abcd::10:255:71:239/128	2	13	20	int	so-6/0/0.0	IPV6 olympic
					ae0.0	IPV6 camaro
abcd::10:255:71:242/128	2	13	10	int	as0.0	IPV6 glacier
abcd::10:255:71:243/128	2	13	10	int	so-6/0/0.0	IPV6 olympic



## show isis statistics

---

<b>Syntax</b>	show isis statistics <instance <i>instance-name</i> > <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches and QFX Series)</b>	show isis statistics <instance <i>instance-name</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Display statistics about IS-IS traffic.
<b>Options</b>	<b>none</b> —Display IS-IS traffic statistics for all routing instances.  <b>instance <i>instance-name</i></b> —(Optional) Display statistics for the specified routing instance.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">clear isis statistics on page 3248</a></li></ul>
<b>List of Sample Output</b>	<a href="#">show isis statistics on page 3278</a>
<b>Output Fields</b>	<a href="#">Table 220 on page 3277</a> describes the output fields for the <b>show isis statistics</b> command. Output fields are listed in the approximate order in which they appear.



Table 220: show isis statistics Output Fields

Field Name	Field Description
PDU type	<p>PDU type:</p> <ul style="list-style-type: none"> <li>• <b>CSNP</b>—Complete sequence number PDUs contain a complete list of all link-state PDUs in the IS-IS database. CSNPs are sent periodically on all links, and the receiving systems use the information in the CSNP to update and synchronize their link-state PDU databases. The designated router multicasts CSNPs on broadcast links in place of sending explicit acknowledgments for each link-state PDU.</li> <li>• <b>IIH</b>—IS-IS hello packets are broadcast to discover the identity of neighboring IS-IS systems and to determine whether the neighbors are Level 1 or Level 2 intermediate systems.</li> <li>• <b>LSP</b>—Link-state PDUs contain information about the state of adjacencies to neighboring IS-IS systems. Link-state PDUs are flooded periodically throughout an area.</li> <li>• <b>PSNP</b>—Partial sequence number PDUs are sent multicast by a receiver when it detects that it is missing a link-state PDU (when its link-state PDU database is out of date). The receiver sends a PSNP to the system that transmitted the CSNP, effectively requesting that the missing link-state PDU be transmitted. That routing device, in turn, forwards the missing link-state PDU to the requesting routing device.</li> <li>• <b>Unknown</b>—The PDU type is unknown.</li> </ul>
Received	Number of PDUs received since IS-IS started or since the statistics were set to zero.
Processed	Number of PDUs received less the number dropped.
Drops	Number of PDUs dropped.
Sent	Number of PDUs transmitted since IS-IS started or since the statistics were set to zero.
Rexmit	Number of PDUs retransmitted since IS-IS started or since the statistics were set to zero.
Total packets received/sent	Total number of PDUs received and transmitted since IS-IS started or since the statistics were set to zero.
SNP queue length	Number of CSPN and PSNP packets currently waiting in the queue for processing. This value is almost always 0.
LSP queue length	Number of link-state PDUs waiting in the queue for processing. This value is almost always 0.
SPF runs	Number of shortest-path-first (SPF) calculations that have been performed. If this number is incrementing rapidly, it indicates that the network is unstable.
Fragments rebuilt	Number of link-state PDU fragments that the local system has computed.
LSP regenerations	Number of link-state PDUs that have been regenerated. A link-state PDU is regenerated when it is nearing the end of its lifetime and it has not changed.
Purges initiated	Number of purges that the system initiated. A purge is initiated if the software decides that a link-state PDU must be removed from the network.



## Sample Output

**show isis statistics**

user@host> **show isis statistics**

IS-IS statistics for merino:

PDU type	Received	Processed	Drops	Sent	Rexmit
LSP	12227	12227	0	8184	683
IIH	113808	113808	0	115817	0
CSNP	198868	198868	0	198934	0
PSNP	6985	6979	6	8274	0
Unknown	0	0	0	0	0
Totals	331888	331882	6	331209	683

Total packets received: 331888 Sent: 331892

SNP queue length:	0 Drops:	0
LSP queue length:	0 Drops:	0

SPF runs:	1014
Fragments rebuilt:	1038
LSP regenerations:	425
Purges initiated:	0



## PART 12

# Open Shortest Path First

- [Overview on page 3281](#)
- [Configuration on page 3293](#)
- [Administration on page 3481](#)







## CHAPTER 37

# Overview

- [OSPF Overview on page 3281](#)

### OSPF Overview

---

- [OSPF Overview on page 3282](#)
- [OSPF Areas and Router Functionality Overview on page 3287](#)
- [Packets Overview on page 3289](#)
- [OSPF External Metrics Overview on page 3292](#)



## OSPF Overview



OSPF is an interior gateway protocol (IGP) that routes packets within a single autonomous system (AS). OSPF uses link-state information to make routing decisions, making route calculations using the shortest-path-first (SPF) algorithm (also referred to as the Dijkstra algorithm). Each router running OSPF floods link-state advertisements throughout the AS or area that contain information about that router's attached interfaces and routing metrics. Each router uses the information in these link-state advertisements to calculate the least cost path to each network and create a routing table for the protocol.

Junos OS supports OSPF version 2 (OSPFv2) and OSPF version 3 (OSPFv3), including virtual links, stub areas, and for OSPFv2, authentication. Junos OS does not support type-of-service (ToS) routing.

OSPF was designed for the Transmission Control Protocol/Internet Protocol (TCP/IP) environment and as a result explicitly supports IP subnetting and the tagging of externally derived routing information. OSPF also provides for the authentication of routing updates.

OSPF routes IP packets based solely on the destination IP address contained in the IP packet header. OSPF quickly detects topological changes, such as when router interfaces become unavailable, and calculates new loop-free routes quickly and with a minimum of routing overhead traffic.



**NOTE:** On SRX Series devices, when only one link-protection is configured under the OSPF interface, the device does not install an alternative route in the forwarding table. When the per-packet load-balancing is enabled as a workaround, the device does not observe both the OSPF metric and sending the traffic through both the interfaces.

An OSPF AS can consist of a single area, or it can be subdivided into multiple areas. In a single-area OSPF network topology, each router maintains a database that describes the topology of the AS. Link-state information for each router is flooded throughout the AS. In a multiarea OSPF topology, each router maintains a database that describes the topology of its area, and link-state information for each router is flooded throughout that area. All routers maintain summarized topologies of other areas within an AS. Within each area, OSPF routers have identical topological databases. When the AS or area topology changes, OSPF ensures that the contents of all routers' topological databases converge quickly.

All OSPFv2 protocol exchanges can be authenticated. OSPFv3 relies on IPsec to provide this functionality. This means that only trusted routers can participate in the AS's routing. A variety of authentication schemes can be used. A single authentication scheme is configured for each area, which enables some areas to use stricter authentication than others.

Externally derived routing data (for example, routes learned from BGP) is passed transparently throughout the AS. This externally derived data is kept separate from the OSPF link-state data. Each external route can be tagged by the advertising router, enabling the passing of additional information between routers on the boundaries of the AS.





**NOTE:** By default, Junos OS is compatible with RFC 1583, *OSPF Version 2*. In Junos OS Release 8.5 and later, you can disable compatibility with RFC 1583 by including the `no-rfc-1583` statement. For more information, see [“Example: Disabling OSPFv2 Compatibility with RFC 1583” on page 3320](#).

This topic describes the following information:

- [OSPF Default Route Preference Values on page 3284](#)
- [OSPF Routing Algorithm on page 3284](#)
- [OSPF Three-Way Handshake on page 3285](#)
- [OSPF Version 3 on page 3286](#)

### OSPF Default Route Preference Values

The Junos OS routing protocol process assigns a default preference value to each route that the routing table receives. The default value depends on the source of the route. The preference value is from 0 through 4,294,967,295 ( $2^{32} - 1$ ), with a lower value indicating a more preferred route. [Table 221 on page 3284](#) lists the default preference values for OSPF.

**Table 221: Default Route Preference Values for OSPF**

How Route Is Learned	Default Preference	Statement to Modify Default Preference
OSPF internal route	10	OSPF <code>preference</code>
OSPF AS external routes	150	OSPF <code>external-preference</code>

### OSPF Routing Algorithm

OSPF uses the shortest-path-first (SPF) algorithm, also referred to as the Dijkstra algorithm, to determine the route to each destination. All routing devices in an area run this algorithm in parallel, storing the results in their individual topological databases. Routing devices with interfaces to multiple areas run multiple copies of the algorithm. This section provides a brief summary of how the SPF algorithm works.

When a routing device starts, it initializes OSPF and waits for indications from lower-level protocols that the router interfaces are functional. The routing device then uses the OSPF hello protocol to acquire neighbors, by sending hello packets to its neighbors and receiving their hello packets.

On broadcast or nonbroadcast multiaccess networks (physical networks that support the attachment of more than two routing devices), the OSPF hello protocol elects a designated router for the network. This routing device is responsible for sending *link-state advertisements* (LSAs) that describe the network, which reduces the amount of network traffic and the size of the routing devices' topological databases.

The routing device then attempts to form *adjacencies* with some of its newly acquired neighbors. (On multiaccess networks, only the designated router and backup designated



router form adjacencies with other routing devices.) Adjacencies determine the distribution of routing protocol packets. Routing protocol packets are sent and received only on adjacencies, and topological database updates are sent only along adjacencies. When adjacencies have been established, pairs of adjacent routers synchronize their topological databases.

A routing device sends LSA packets to advertise its state periodically and when its state changes. These packets include information about the routing device's adjacencies, which allows detection of nonoperational routing devices.

Using a reliable algorithm, the routing device floods LSAs throughout the area, which ensures that all routing devices in an area have exactly the same topological database. Each routing device uses the information in its topological database to calculate a shortest-path tree, with itself as the root. The routing device then uses this tree to route network traffic.


The description of the SPF algorithm up to this point has explained how the algorithm works within a single area (*intra-area routing*). For internal routers to be able to route to destinations outside the area (*interarea routing*), the area border routers must inject additional routing information into the area. Because the area border routers are connected to the backbone, they have access to complete topological data about the backbone. The area border routers use this information to calculate paths to all destinations outside its area and then advertise these paths to the area's internal routers.

Autonomous system (AS) boundary routers flood information about external autonomous systems throughout the AS, except to stub areas. Area border routers are responsible for advertising the paths to all AS boundary routers.

### OSPF Three-Way Handshake

OSPF creates a topology map by flooding LSAs across OSPF-enabled links. LSAs announce the presence of OSPF-enabled interfaces to adjacent OSPF interfaces. The exchange of LSAs establishes bidirectional connectivity between all adjacent OSPF interfaces (neighbors) using a three-way handshake, as shown in [Figure 95 on page 3285](#).

**Figure 95: OSPF Three-Way Handshake**

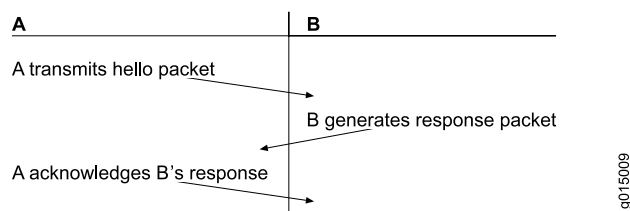

In [Figure 95 on page 3285](#), Router A sends hello packets out all its OSPF-enabled interfaces when it comes online. Router B receives the packet, which establishes that Router B can receive traffic from Router A. Router B generates a response to Router A to acknowledge receipt of the hello packet. When Router A receives the response, it establishes that Router B can receive traffic from Router A. Router A then generates a final response packet to inform Router B that Router A can receive traffic from Router B. This three-way handshake ensures bidirectional connectivity.



As new neighbors are added to the network or existing neighbors lose connectivity, the adjacencies in the topology map are modified accordingly through the exchange (or absence) of LSAs. These LSAs advertise only the incremental changes in the network, which helps minimize the amount of OSPF traffic on the network. The adjacencies are shared and used to create the network topology in the topological database.

### OSPF Version 3

---

OSPFv3 is a modified version of OSPF that supports IP version 6 (IPv6) addressing. OSPFv3 differs from OSPFv2 in the following ways:

- All neighbor ID information is based on a 32-bit router ID.
- The protocol runs per link rather than per subnet.
- Router and network link-state advertisements (LSAs) do not carry prefix information.
- Two new LSA types are included: link-LSA and intra-area-prefix-LSA.
- Flooding scopes are as follows:
  - Link-local
  - Area
  - AS
- Link-local addresses are used for all neighbor exchanges except virtual links.
- Authentication is removed. The IPv6 authentication header relies on the IP layer.
- The packet format has changed as follows:
  - Version number 2 is now version number 3.
  - The **db** option field has been expanded to 24 bits.
  - Authentication information has been removed.
  - Hello messages do not have address information.
  - Two new option bits are included: **R** and **V6**.
- Type 3 summary LSAs have been renamed *inter-area-prefix-LSAs*.
- Type 4 summary LSAs have been renamed *inter-area-router-LSAs*.

#### Related Documentation

- [Understanding OSPF Areas and Backbone Areas on page 3298](#)
- [OSPF Configuration Overview](#)
- [OSPF Version 3 for IPv6](#)
- [Example: Disabling OSPFv2 Compatibility with RFC 1583 on page 3320](#)



## OSPF Areas and Router Functionality Overview

In OSPF, a single autonomous system (AS) can be divided into smaller groups called *areas*. This reduces the number of link-state advertisements (LSAs) and other OSPF overhead traffic sent on the network, and it reduces the size of the topology database that each router must maintain. The routing devices that participate in OSPF routing perform one or more functions based on their location in the network.

This topic describes the following OSPF area types and routing device functions:

- [Areas on page 3287](#)
- [Area Border Routers on page 3287](#)
- [Backbone Areas on page 3287](#)
- [AS Boundary Routers on page 3288](#)
- [Backbone Router on page 3288](#)
- [Internal Router on page 3288](#)
- [Stub Areas on page 3288](#)
- [Not-So-Stubby Areas on page 3288](#)
- [Transit Areas on page 3289](#)

---

### Areas

An *area* is a set of networks and hosts within an AS that have been administratively grouped together. We recommend that you configure an area as a collection of contiguous IP subnetted networks. Routing devices that are wholly within an area are called *internal routers*. All interfaces on internal routers are directly connected to networks within the area.

The topology of an area is hidden from the rest of the AS, thus significantly reducing routing traffic in the AS. Also, routing within the area is determined only by the area's topology, providing the area with some protection from bad routing data.

All routing devices within an area have identical topology databases.

---

### Area Border Routers

Routing devices that belong to more than one area and connect one or more OSPF areas to the backbone area are called *area border routers* (ABRs). At least one interface is within the backbone while another interface is in another area. ABRs also maintain a separate topological database for each area to which they are connected.

---

### Backbone Areas

An OSPF *backbone area* consists of all networks in area ID 0.0.0.0, their attached routing devices, and all ABRs. The backbone itself does not have any ABRs. The backbone distributes routing information between areas. The backbone is simply another area, so the terminology and rules of areas apply: a routing device that is directly connected to the backbone is an internal router on the backbone, and the backbone's topology is hidden from the other areas in the AS.



The routing devices that make up the backbone must be physically contiguous. If they are not, you must configure *virtual links* to create the appearance of backbone connectivity. You can create virtual links between any two ABRs that have an interface to a common nonbackbone area. OSPF treats two routing devices joined by a virtual link as if they were connected to an unnumbered point-to-point network.

---

### AS Boundary Routers

Routing devices that exchange routing information with routing devices in non-OSPF networks are called *AS boundary routers*. They advertise externally learned routes throughout the OSPF AS. Depending on the location of the AS boundary router in the network, it can be an ABR, a backbone router, or an internal router (with the exception of stub areas). Internal routers within a stub area cannot be an AS boundary router because stub areas cannot contain any Type 5 LSAs.

Routing devices within the area where the AS boundary router resides know the path to that AS boundary router. Any routing device outside the area only knows the path to the nearest ABR that is in the same area where the AS boundary router resides.

---

### Backbone Router

*Backbone routers* are routing devices that have one or more interfaces connected to the OSPF backbone area (area ID 0.0.0.0).

---

### Internal Router

Routing devices that connect to only one OSPF area are called *internal routers*. All interfaces on internal routers are directly connected to networks within a single area.

---

### Stub Areas

*Stub areas* are areas through which or into which AS external advertisements are not flooded. You might want to create stub areas when much of the topological database consists of AS external advertisements. Doing so reduces the size of the topological databases and therefore the amount of memory required on the internal routers in the stub area.

Routing devices within a stub area rely on the default routes originated by the area's ABR to reach external AS destinations. You must configure the **default-metric** option on the ABR before it advertises a default route. Once configured, the ABR advertises a default route in place of the external routes that are not being advertised within the stub area, so that routing devices in the stub area can reach destinations outside the area.

The following restrictions apply to stub areas: you cannot create a virtual link through a stub area, a stub area cannot contain an AS boundary router, the backbone cannot be a stub area, and you cannot configure an area as both a stub area and a not-so-stubby area.

---

### Not-So-Stubby Areas

An OSPF stub area has no external routes in it, so you cannot redistribute from another protocol into a stub area. A *not-so-stubby area* (NSSA) allows external routes to be



flooded within the area. These routes are then leaked into other areas. However, external routes from other areas still do not enter the NSSA.

The following restriction applies to NSSAs: you cannot configure an area as both a stub area and an NSSA.

### Transit Areas

*Transit areas* are used to pass traffic from one adjacent area to the backbone (or to another area if the backbone is more than two hops away from an area). The traffic does not originate in, nor is it destined for, the transit area.

#### Related Documentation

- [OSPF Overview on page 3282](#)
- [Packets Overview on page 3289](#)
- [OSPF Configuration Overview](#)
- [Understanding OSPF Areas and Backbone Areas on page 3298](#)
- [Understanding OSPF Stub Areas, Totally Stubby Areas, and Not-So-Stubby Areas on page 3305](#)

## Packets Overview

There are several types of link-state advertisement (LSA) packets.

This topic describes the following information:

- [OSPF Packet Header on page 3289](#)
- [Hello Packets on page 3290](#)
- [Database Description Packets on page 3290](#)
- [Link-State Request Packets on page 3290](#)
- [Link-State Update Packets on page 3290](#)
- [Link-State Acknowledgment Packets on page 3291](#)
- [Link-State Advertisement Packet Types on page 3291](#)

### OSPF Packet Header

All OSPFv2 packets have a common 24-byte header, and OSPFv3 packets have a common 16-byte header, that contains all information necessary to determine whether OSPF should accept the packet. The header consists of the following fields:

- Version number—The current OSPF version number. This can be either **2** or **3**.
- Type—Type of OSPF packet.
- Packet length—Length of the packet, in bytes, including the header.
- Router ID—IP address of the router from which the packet originated.
- Area ID—Identifier of the area in which the packet is traveling. Each OSPF packet is associated with a single area. Packets traveling over a virtual link are labeled with the backbone area ID, 0.0.0.0.



- Checksum—Fletcher checksum.
- Authentication—(OSPFv2 only) Authentication scheme and authentication information.
- Instance ID—(OSPFv3 only) Identifier used when there are multiple OSPFv3 realms configured on a link.

### Hello Packets

---

Routers periodically send hello packets on all interfaces, including virtual links, to establish and maintain neighbor relationships. Hello packets are multicast on physical networks that have a multicast or broadcast capability, which enables dynamic discovery of neighboring routers. (On nonbroadcast networks, dynamic neighbor discovery is not possible, so you must configure all neighbors statically as described in [“Example: Configuring an OSPFv2 Interface on a Nonbroadcast Multiaccess Network”](#) on page 3325.)

Hello packets consist of the OSPF header plus the following fields:

- Network mask—(OSPFv2 only) Network mask associated with the interface.
- Hello interval—How often the router sends hello packets. All routers on a shared network must use the same hello interval.
- Options—Optional capabilities of the router.
- Router priority—The router’s priority to become the designated router.
- Router dead interval—How long the router waits without receiving any OSPF packets from a router before declaring that router to be down. All routers on a shared network must use the same router dead interval.
- Designated router—IP address of the designated router.
- Backup designated router—IP address of the backup designated router.
- Neighbor—IP addresses of the routers from which valid hello packets have been received within the time specified by the router dead interval.

### Database Description Packets

---

When initializing an adjacency, OSPF exchanges database description packets, which describe the contents of the topological database. These packets consist of the OSPF header, packet sequence number, and the link-state advertisement’s header.

### Link-State Request Packets

---

When a router detects that portions of its topological database are out of date, it sends a link-state request packet to a neighbor requesting a precise instance of the database. These packets consist of the OSPF header plus fields that uniquely identify the database information that the router is seeking.

### Link-State Update Packets

---

Link-state update packets carry one or more link-state advertisements one hop farther from their origin. The router multicasts (floods) these packets on physical networks that support multicast or broadcast mode. The router acknowledges all link-state update



packets and, if retransmission is necessary, sends the retransmitted advertisements unicast.

Link-state update packets consist of the OSPF header plus the following fields:

- Number of advertisements—Number of link-state advertisements included in this packet.
- Link-state advertisements—The link-state advertisements themselves.

### Link-State Acknowledgment Packets

The router sends link-state acknowledgment packets in response to link-state update packets to verify that the update packets have been received successfully. A single acknowledgment packet can include responses to multiple update packets.

Link-state acknowledgment packets consist of the OSPF header plus the link-state advertisement header.

### Link-State Advertisement Packet Types

Link-state request, link-state update, and link-state acknowledgment packets are used to reliably flood link-state advertisement packets. OSPF sends the following types of link-state advertisements:

- Router link advertisements—Are sent by all routers to describe the state and cost of the router's links to the area. These link-state advertisements are flooded throughout a single area only.
- Network link advertisements—Are sent by designated routers to describe all the routers attached to the network. These link-state advertisements are flooded throughout a single area only.
- Summary link advertisements—Are sent by area border routers to describe the routes that they know about in other areas. There are two types of summary link advertisements: those used when the destination is an IP network, and those used when the destination is an AS boundary router. Summary link advertisements describe interarea routes, that is, routes to destinations outside the area but within the AS. These link-state advertisements are flooded throughout the advertisement's associated areas.
- AS external link advertisement—Are sent by AS boundary routers to describe external routes that they know about. These link-state advertisements are flooded throughout the AS (except for stub areas).

Each link-state advertisement type describes a portion of the OSPF routing domain. All link-state advertisements are flooded throughout the AS.

Each link-state advertisement packet begins with a common 20-byte header.

#### Related Documentation

- [OSPF Overview on page 3282](#)
- [OSPF Areas and Router Functionality Overview on page 3287](#)
- [OSPF Configuration Overview](#)



- [OSPF Designated Router Overview on page 3293](#)
- [Understanding OSPFv2 Authentication](#)
- [OSPF Timers Overview on page 3359](#)

## OSPF External Metrics Overview

When OSPF exports route information from external autonomous systems (ASs), it includes a cost, or *external metric*, in the route. OSPF supports two types of external metrics: Type 1 and Type 2. The difference between the two metrics is how OSPF calculates the cost of the route. Type 1 external metrics are equivalent to the link-state metric, where the cost is equal to the sum of the internal costs plus the external cost. This means that Type 1 external metrics include the external cost to the destination as well as the cost (metric) to reach the AS boundary router. Type 2 external metrics are greater than the cost of any path internal to the AS. Type 2 external metrics use only the external cost to the destination and ignore the cost (metric) to reach the AS boundary router. By default, OSPF uses the Type 2 external metric.



## CHAPTER 38

# Configuration

- [Basic OSPF Area Configuration on page 3293](#)
- [Advanced OSPF Area Configuration on page 3304](#)
- [OSPF Interface Configuration on page 3321](#)
- [OSPF Route Control Configuration on page 3336](#)
- [OSPF Fault Detection Configuration on page 3359](#)
- [OSPF Redundancy Features Configuration on page 3376](#)
- [OSPF Traffic Engineering Configuration on page 3392](#)
- [OSPF Database Protection Configuration on page 3402](#)
- [OSPF Policy Configuration on page 3405](#)
- [OSPF Monitoring Configuration on page 3438](#)
- [Configuration Statements on page 3445](#)

### Basic OSPF Area Configuration

---

- [Examples: Configuring OSPF Designated Routers on page 3293](#)
- [Examples: Configuring OSPF Areas on page 3298](#)

### Examples: Configuring OSPF Designated Routers

- [OSPF Designated Router Overview on page 3293](#)
- [Example: Configuring an OSPF Router Identifier on page 3294](#)
- [Example: Controlling OSPF Designated Router Election on page 3296](#)

#### OSPF Designated Router Overview

---

Large LANs that have many routing devices and therefore many OSPF adjacencies can produce heavy control-packet traffic as link-state advertisements (LSAs) are flooded across the network. To alleviate the potential traffic problem, OSPF uses designated routers on all multiaccess networks (broadcast and nonbroadcast multiaccess [NBMA] networks types). Rather than broadcasting LSAs to all their OSPF neighbors, the routing devices send their LSAs to the designated router. Each multiaccess network has a designated router, which performs two main functions:

- Originate network link advertisements on behalf of the network.



- Establish adjacencies with all routing devices on the network, thus participating in the synchronizing of the link-state databases.

In LANs, the election of the designated router takes place when the OSPF network is initially established. When the first OSPF links are active, the routing device with the highest router identifier (defined by the **router-id** configuration value, which is typically the IP address of the routing device, or the loopback address) is elected the designated router. The routing device with the second highest router identifier is elected the backup designated router. If the designated router fails or loses connectivity, the backup designated router assumes its role and a new backup designated router election takes place between all the routers in the OSPF network.

OSPF uses the router identifier for two main purposes: to elect a designated router, unless you manually specify a priority value, and to identify the routing device from which a packet is originated. At designated router election, the router priorities are evaluated first, and the routing device with the highest priority is elected designated router. If router priorities tie, the routing device with the highest router identifier, which is typically the routing device's IP address, is chosen as the designated router. If you do not configure a router identifier, the IP address of the first interface to come online is used. This is usually the loopback interface. Otherwise, the first hardware interface with an IP address is used.

At least one routing device on each logical IP network or subnet must be eligible to be the designated router for OSPFv2. At least one routing device on each logical link must be eligible to be the designated router for OSPFv3.

By default, routing devices have a priority of 128. A priority of 0 marks the routing device as ineligible to become the designated router. A priority of 1 means the routing device has the least chance of becoming a designated router. A priority of 255 means the routing device is always the designated router.

---

### Example: Configuring an OSPF Router Identifier

---

This example shows how to configure an OSPF router identifier.

- [Requirements on page 3294](#)
- [Overview on page 3295](#)
- [Configuration on page 3295](#)
- [Verification on page 3296](#)

#### **Requirements**

Before you begin:

- Identify the interfaces on the routing device that will participate in OSPF. You must enable OSPF on all interfaces within the network on which OSPF traffic is to travel.
- Configure the device interfaces. See the Router Interfaces or the *Junos OS Interfaces Configuration Guide for Security Devices*.



### Overview

The router identifier is used by OSPF to identify the routing device from which a packet originated. Junos OS selects a router identifier according to the following set of rules:

1. By default, Junos OS selects the lowest configured physical IP address of an interface as the router identifier.
2. If a loopback interface is configured, the IP address of the loopback interface becomes the router identifier.
3. If multiple loopback interfaces are configured, the lowest loopback address becomes the router identifier.
4. If a router identifier is explicitly configured using the **router-id address** statement under the **[edit routing-options]** hierarchy level, the above three rules are ignored.



**NOTE:** If the router identifier is modified in a network, the link-state advertisements (LSAs) advertised by the previous router identifier are retained in the OSPF database until the LSA retransmit interval has timed out.

If the router identifier is not configured explicitly and an interface IP address is used as the router identifier, the established OSPF adjacency flaps when the interface goes down, or when it is brought back into the network. When the interface is brought back into the network, or a new interface is introduced into the network, the router identifier is selected again based on the rules stated above. Hence, it is strongly recommended that you explicitly configure the router identifier under the **[edit routing-options]** hierarchy level to avoid unpredictable behavior if the interface address on a loopback interface changes.



**NOTE:** The router identifier behavior described here holds good even when configured under **[edit routing-instances routing-instance-name routing-options]** and **[edit logical-systems logical-system-name routing-instances routing-instance-name routing-options]** hierarchy levels.

In this example, you configure the OSPF router identifier by setting its router ID value to the IP address of the device, which is 177.162.4.24.

### Configuration

#### CLI Quick Configuration

To quickly configure an OSPF router identifier, copy the following command and paste it into the CLI.

```
[edit]
set routing-options router-id 177.162.4.24
```

#### Step-by-Step Procedure

To configure an OSPF router identifier:

1. Configure the OSPF router identifier by entering the **[router-id]** configuration value.
- ```
[edit]
```



```
user@host# set routing-options router-id 177.162.4.24
```

2. If you are done configuring the device, commit the configuration.

```
[edit]  
user@host# commit
```

### Results

Confirm your configuration by entering the **show routing-options router-id** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show routing-options router-id  
router-id 177.162.4.24;
```

### Verification

After you configure the router ID and activate OSPF on the routing device, the router ID is referenced by multiple OSPF operational mode commands that you can use to monitor and troubleshoot the OSPF protocol. The router ID fields are clearly marked in the output.

### Example: Controlling OSPF Designated Router Election

---

This example shows how to control OSPF designated router election.

- [Requirements on page 3296](#)
- [Overview on page 3296](#)
- [Configuration on page 3296](#)
- [Verification on page 3297](#)

### Requirements

Before you begin:

- Configure the device interfaces. See the Router Interfaces or the *Junos OS Interfaces Configuration Guide for Security Devices*.
- Configure the router identifiers for the devices in your OSPF network. See “[Example: Configuring an OSPF Router Identifier](#)” on page 3294.

### Overview

This example shows how to control OSPF designated router election. Within the example, you set the OSPF interface to **ge-/0/0/1** and the device priority to 200. The higher the priority value, the greater likelihood the routing device will become the designated router.

By default, routing devices have a priority of 128. A priority of 0 marks the routing device as ineligible to become the designated router. A priority of 1 means the routing device has the least chance of becoming a designated router.

### Configuration

#### CLI Quick Configuration

To quickly configure an OSPF designated router election, copy the following command and paste it into the CLI.



```
[edit]
set protocols ospf area 0.0.0.3 interface ge-0/0/1 priority 200
```

### Step-by-Step Procedure

To control OSPF designated router election:

1. Configure an OSPF interface and specify the device priority.



**NOTE:** To specify an OSPFv3 interface, include the **ospf3** statement at the **[edit protocols]** hierarchy level.

```
[edit]
user@host# set protocols ospf area 0.0.0.3 interface ge-0/0/1 priority 200
```

2. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

### Results

Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
area 0.0.0.3 {
  interface ge-0/0/1.0 {
    priority 200;
  }
}
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.

### Verification

Confirm that the configuration is working properly.

- [Verifying the Designated Router Election on page 3297](#)

### Verifying the Designated Router Election

**Purpose** Based on the priority you configured for a specific OSPF interface, you can confirm the address of the area's designated router. The DR ID, DR, or DR-ID field displays the address of the area's designated router. The BDR ID, BDR, or BDR-ID field displays the address of the backup designated router.

**Action** From operational mode, enter the **show ospf interface** and the **show ospf neighbor** commands for OSPFv2, and enter the **show ospf3 interface** and the **show ospf3 neighbor** commands for OSPFv3.

### Related Documentation

- [OSPF Areas and Router Functionality Overview on page 3287](#)



- [OSPF Configuration Overview](#)

## Examples: Configuring OSPF Areas


- [Understanding OSPF Areas and Backbone Areas on page 3298](#)
- [Example: Configuring a Single-Area OSPF Network on page 3299](#)
- [Example: Configuring a Multiarea OSPF Network on page 3301](#)

### Understanding OSPF Areas and Backbone Areas

OSPF networks in an autonomous system (AS) are administratively grouped into *areas*. Each area within an AS operates like an independent network and has a unique 32-bit area ID, which functions similar to a network address. Within an area, the topology database contains only information about the area, link-state advertisements (LSAs) are flooded only to nodes within the area, and routes are computed only within the area. The topology of an area is hidden from the rest of the AS, thus significantly reducing routing traffic in the AS. Subnetworks are divided into other areas, which are connected to form the whole of the main network. Routing devices that are wholly within an area are called *internal routers*. All interfaces on internal routers are directly connected to networks within the area.

The central area of an AS, called the *backbone area*, has a special function and is always assigned the area ID 0.0.0.0. (Within a simple, single-area network, this is also the ID of the area.) Area IDs are unique numeric identifiers, in dotted decimal notation, but they are not IP addresses. Area IDs need only be unique within an AS. All other networks or areas in the AS must be directly connected to the backbone area by a routing device that has interfaces in more than one area. These connecting routing devices are called *area border routers* (ABRs). [Figure 96 on page 3298](#) shows an OSPF topology of three areas connected by two ABRs.

Figure 96: Multiarea OSPF Topology

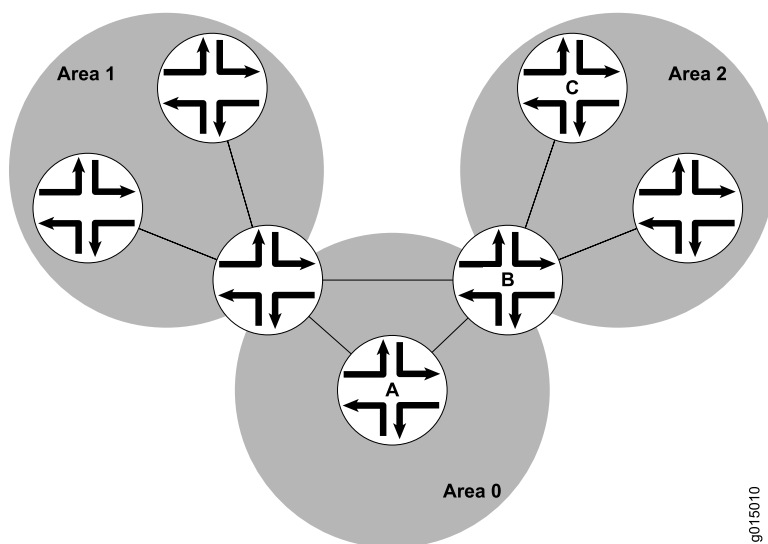



Because all areas are adjacent to the backbone area, OSPF routers send all traffic not destined for their own area through the backbone area. The ABRs in the backbone area are then responsible for transmitting the traffic through the appropriate ABR to the destination area. The ABRs summarize the link-state records of each area and advertise destination address summaries to neighboring areas. The advertisements contain the ID of the area in which each destination lies, so that packets are routed to the appropriate ABR. For example, in the OSPF areas shown in [Figure 96 on page 3298](#), packets sent from Router A to Router C are automatically routed through ABR B.

Junos OS supports active backbone detection. Active backbone detection is implemented to verify that ABRs are connected to the backbone. If the connection to the backbone area is lost, then the routing device's default metric is not advertised, effectively rerouting traffic through another ABR with a valid connection to the backbone. Active backbone detection enables transit through an ABR with no active backbone connection. An ABR advertises to other routing devices that it is an ABR even if the connection to the backbone is down, so that the neighbors can consider it for interarea routes.

An OSPF restriction requires all areas to be directly connected to the backbone area so that packets can be properly routed. All packets are routed first to the backbone area by default. Packets that are destined for an area other than the backbone area are then routed to the appropriate ABR and on to the remote host within the destination area.

### Example: Configuring a Single-Area OSPF Network

This example shows how to configure a single-area OSPF network.

- [Requirements on page 3299](#)
- [Overview on page 3299](#)
- [Configuration on page 3300](#)
- [Verification on page 3301](#)

#### Requirements

Before you begin:

- Configure the device interfaces. See the Router Interfaces or the *Junos OS Interfaces Configuration Guide for Security Devices*.
- Configure the router identifiers for the devices in your OSPF network. See "[Example: Configuring an OSPF Router Identifier](#)" on page 3294.

#### Overview

To activate OSPF on a network, you must enable the OSPF protocol on all interfaces within the network on which OSPF traffic is to travel. To enable OSPF, you must configure one or more interfaces on the device within an OSPF area. Once the interfaces are configured, OSPF LSAs are transmitted on all OSPF-enabled interfaces, and the network topology is shared throughout the network.


In an autonomous system (AS), the backbone area is always assigned area ID 0.0.0.0 (within a simple, single-area network, this is also the ID of the area). Area IDs are unique numeric identifiers, in dotted decimal notation. Area IDs need only be unique within an



AS. All other networks or areas in the AS must be directly connected to the backbone area by area border routers that have interfaces in more than one area. You must also create a backbone area if your network consists of multiple areas. In this example, you create the backbone area and add interfaces, such as **ge-0/0/0**, as needed to the OSPF area.

To use OSPF on the device, you must configure at least one OSPF area, such as the one shown in [Figure 97 on page 3300](#).

**Figure 97: Typical Single-Area OSPF Network Topology**

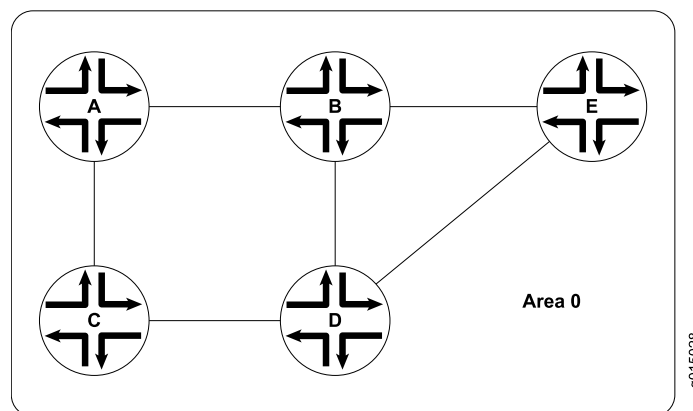

#### Configuration

##### CLI Quick Configuration

To quickly configure a single-area OSPF network, copy the following command and paste it into the CLI. You repeat this configuration for all interfaces that are part of the OSPF area.

```
[edit]
set protocols ospf area 0.0.0.0 interface ge-0/0/0
```

##### Step-by-Step Procedure

To configure a single-area OSPF network:

1. Configure the single-area OSPF network by specifying the area ID and associated interface.



**NOTE:** For a single-area OSPFv3 network, include the `ospf3` statement at the `[edit protocols]` hierarchy level.

```
[edit]
user@host# set protocols ospf area 0.0.0.0 interface ge-0/0/0
```

2. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```



### Results

Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
area 0.0.0.0 {
  interface ge-0/0/0.0;
}
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.

### Verification

Confirm that the configuration is working properly.

#### Verifying the Interfaces in the Area

- |                |                                                                                                                                                                |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Purpose</b> | Verify that the interface for OSPF or OSPFv3 has been configured for the appropriate area. Confirm that the Area field displays the value that you configured. |
| <b>Action</b>  | From operational mode, enter the <b>show ospf interface</b> command for OSPFv2, and enter the <b>show ospf3 interface</b> command for OSPFv3.                  |

### Example: Configuring a Multiarea OSPF Network

This example shows how to configure a multiarea OSPF network. To reduce traffic and topology maintenance for the devices in an OSPF autonomous system (AS), you can group the OSPF-enabled routing devices into multiple areas.

- [Requirements on page 3301](#)
- [Overview on page 3302](#)
- [Configuration on page 3302](#)
- [Verification on page 3304](#)

### Requirements

Before you begin:

- Configure the device interfaces. See the Router Interfaces or the *Junos OS Interfaces Configuration Guide for Security Devices*.
- Configure the router identifiers for the devices in your OSPF network. See “[Example: Configuring an OSPF Router Identifier](#)” on page 3294.
- Control OSPF designated router election. See “[Example: Controlling OSPF Designated Router Election](#)” on page 3296.
- Configure a single-area OSPF network. See “[Example: Configuring a Single-Area OSPF Network](#)” on page 3299.




### Overview

To activate OSPF on a network, you must enable the OSPF protocol on all interfaces within the network on which OSPF traffic is to travel. To enable OSPF, you must configure one or more interfaces on the device within an OSPF area. Once the interfaces are configured, OSPF LSAs are transmitted on all OSPF-enabled interfaces, and the network topology is shared throughout the network.

Each OSPF area consists of routing devices configured with the same area number. The backbone area is always assigned area ID 0.0.0.0. (All area identifiers (IDs) must be unique within an AS.) All other networks or areas in the AS must be directly connected to the backbone area by a router that has interfaces in more than one area. In [Figure 98 on page 3302](#), Devices A and C are in the backbone area (area 0), and Devices D and E are in area 2. Device B has a special role. This is the area border router that connects area 0 and area 2. The area border router maintains a separate topological database for each area to which it is connected.

To reduce traffic and topology maintenance for the devices in an OSPF AS, you can group them into multiple areas as shown in [Figure 98 on page 3302](#). In this example, you create the backbone area, create an additional area (area 2) and assign it unique area ID 0.0.0.2, and you configure Device B as the area border router, where interface **ge-0/0/0** participates in OSPF area 0 and interface **ge-0/0/2** participates in OSPF area 2.

**Figure 98: Typical Multiarea OSPF Network Topology**

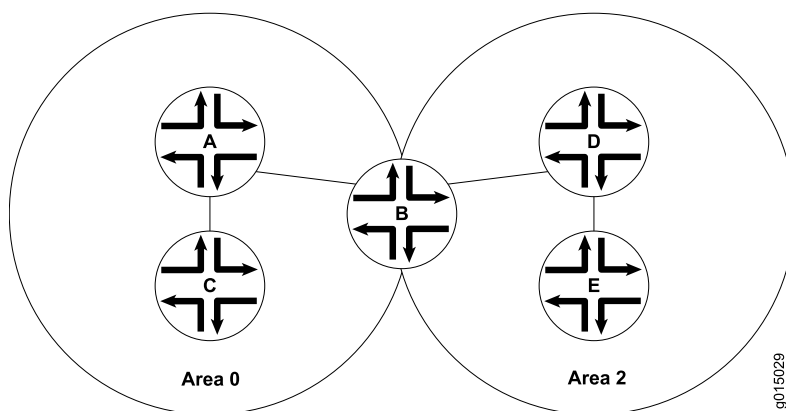

### Configuration

**CLI Quick Configuration** To quickly configure a multiarea OSPF network, copy the following commands and paste them into the CLI. You repeat this configuration for all interfaces that are part of the OSPF area.

**Device A** [edit]  
 set protocols ospf area 0.0.0.0 interface ge-0/0/0  
 set protocols ospf area 0.0.0.0 interface ge-0/0/1

**Device C** [edit]  
 set protocols ospf area 0.0.0.0 interface ge-0/0/0

**Device B** [edit]



```
set protocols ospf area 0.0.0.0 interface ge-0/0/0
set protocols ospf area 0.0.0.2 interface ge-0/0/2
```

**Device D**      [edit]  
 set protocols ospf area 0.0.0.2 interface ge-0/0/0  
 set protocols ospf area 0.0.0.2 interface ge-0/0/2

**Device E**      [edit]  
 set protocols ospf area 0.0.0.2 interface ge-0/0/2

**Step-by-Step Procedure**      To configure a multiarea OSPF network:

1. Configure the backbone area.



**NOTE:** For an OSPFv3 network, include the `ospf3` statement at the [edit protocols] hierarchy level.

```
[edit]
user@A# set protocols ospf area 0.0.0.0 interface ge-0/0/0
user@A# set protocols ospf area 0.0.0.0 interface ge-0/0/1
```

```
[edit]
user@C# set protocols ospf area 0.0.0.0 interface ge-0/0/0
```

```
[edit]
user@B# set protocols ospf area 0.0.0.0 interface ge-0/0/0
```

2. Configure an additional area for your OSPF network.

```
[edit]
user@B# set protocols ospf area 0.0.0.2 interface ge-0/0/2
```

```
[edit]
user@D# set protocols ospf area 0.0.0.2 interface ge-0/0/0
user@D# set protocols ospf area 0.0.0.2 interface ge-0/0/2
```

```
[edit]
user@E# set protocols ospf area 0.0.0.2 interface ge-0/0/2
```

3. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

### Results

Confirm your configuration by entering the `show protocols ospf` command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@A# show protocols ospf
area 0.0.0.0 {
  interface ge-0/0/0.0;
  interface ge-0/0/1.0;
}
```



```
user@C# show protocols ospf
area 0.0.0.0 {
  interface ge-0/0/0.0;
}

user@B# show protocols ospf
area 0.0.0.0 {
  interface ge-0/0/0.0;
}
area 0.0.0.2 {
  interface ge-0/0/2.0;
}

user@D# show protocols ospf
area 0.0.0.2 {
  interface ge-0/0/0.0;
  interface ge-0/0/2.0;
}

user@E# show protocols ospf
area 0.0.0.2 {
  interface ge-0/0/2.0;
}
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.

### **Verification**

Confirm that the configuration is working properly.

- [Verifying the Interfaces in the Area on page 3304](#)

### **Verifying the Interfaces in the Area**

**Purpose** Verify that the interface for OSPF or OSPFv3 has been configured for the appropriate area. Confirm that the Area field displays the value that you configured.

**Action** From operational mode, enter the **show ospf interface** command for OSPFv2, and enter the **show ospf3 interface** command for OSPFv3.

**Related Documentation**

- [OSPF Areas and Router Functionality Overview on page 3287](#)
- [OSPF Configuration Overview](#)

---

## **Advanced OSPF Area Configuration**

- [Examples: Configuring OSPF Stub and Not-So-Stubby Areas on page 3305](#)
- [Example: Configuring OSPF Multiarea Adjacency on page 3315](#)
- [Example: Disabling OSPFv2 Compatibility with RFC 1583 on page 3319](#)




## Examples: Configuring OSPF Stub and Not-So-Stubby Areas

- [Understanding OSPF Stub Areas, Totally Stubby Areas, and Not-So-Stubby Areas on page 3305](#)
- [Example: Configuring OSPF Stub and Totally Stubby Areas on page 3306](#)
- [Example: Configuring OSPF Not-So-Stubby Areas on page 3310](#)

### Understanding OSPF Stub Areas, Totally Stubby Areas, and Not-So-Stubby Areas

Figure 99 on page 3305 shows an autonomous system (AS) across which many external routes are advertised. If external routes make up a significant portion of a topology database, you can suppress the advertisements in areas that do not have links outside the network. By doing so, you can reduce the amount of memory the nodes use to maintain the topology database and free it for other uses.

Figure 99: OSPF AS Network with Stub Areas and NSSAs

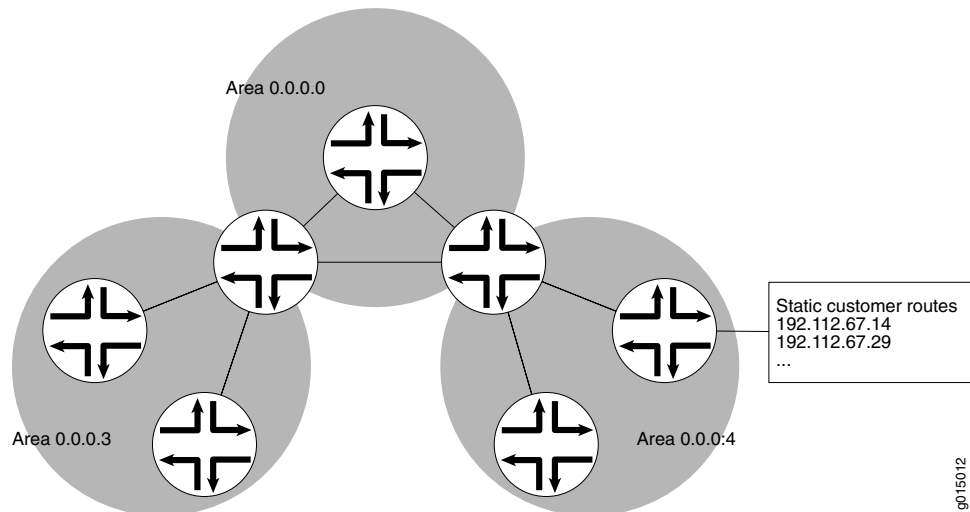

To control the advertisement of external routes into an area, OSPF uses stub areas. By designating an area border router (ABR) interface to the area as a stub interface, you suppress external route advertisements through the ABR. Instead, the ABR advertises a default route (through itself) in place of the external routes and generates network summary (Type 3) link-state advertisements (LSAs). Packets destined for external routes are automatically sent to the ABR, which acts as a gateway for outbound traffic and routes the traffic appropriately.



**NOTE:** You must explicitly configure the ABR to generate a default route when attached to a stub or not-so-stubby-area (NSSA). To inject a default route with a specified metric value into the area, you must configure the `default-metric` option and specify a metric value.

For example, area 0.0.0.3 in Figure 99 on page 3305 is not directly connected to the outside network. All outbound traffic is routed through the ABR to the backbone and then to the



destination addresses. By designating area 0.0.0.3 as a stub area, you reduce the size of the topology database for that area by limiting the route entries to only those routes internal to the area.

A stub area that only allows routes internal to the area and restricts Type 3 LSAs from entering the stub area is often called a *totally stubby area*. You can convert area 0.0.0.3 to a totally stubby area by configuring the ABR to only advertise and allow the default route to enter into the area. External routes and destinations to other areas are no longer summarized or allowed into a totally stubby area.



**NOTE:** If you incorrectly configure a totally stubby area, you might encounter network connectivity issues. You should have advanced knowledge of OSPF and understand your network environment before configuring totally stubby areas.

Similar to area 0.0.0.3 in [Figure 99 on page 3305](#), area 0.0.0.4 has no external connections. However, area 0.0.0.4 has static customer routes that are not internal OSPF routes. You can limit the external route advertisements to the area and advertise the static customer routes by designating the area an NSSA. In an NSSA, the AS boundary router generates NSSA external (Type 7) LSAs and floods them into the NSSA, where they are contained. Type 7 LSAs allow an NSSA to support the presence of AS boundary routers and their corresponding external routing information. The ABR converts Type 7 LSAs into AS external (Type 5) LSAs and leaks them to the other areas, but external routes from other areas are not advertised within the NSSA.

---

### Example: Configuring OSPF Stub and Totally Stubby Areas

---

This example shows how to configure an OSPF stub area and a totally stubby area to control the advertisement of external routes into an area.

- [Requirements on page 3306](#)
- [Overview on page 3307](#)
- [Configuration on page 3308](#)
- [Verification on page 3309](#)

#### Requirements

Before you begin:

- Configure the device interfaces. See the Router Interfaces or the *Junos OS Interfaces Configuration Guide for Security Devices*.
- Configure the router identifiers for the devices in your OSPF network. See “[Example: Configuring an OSPF Router Identifier](#)” on page 3294.
- Control OSPF designated router election. See “[Example: Controlling OSPF Designated Router Election](#)” on page 3296
- Configure a multiarea OSPF network. See “[Example: Configuring a Multiarea OSPF Network](#)” on page 3301.



### Overview

The backbone area, which is 0 in [Figure 100 on page 3308](#), has a special function and is always assigned the area ID 0.0.0.0. Area IDs are unique numeric identifiers, in dotted decimal notation. Area IDs need only be unique within an autonomous system (AS). All other networks or areas (such as 3, 7, and 9) in the AS must be directly connected to the backbone area by area border routers (ABRs) that have interfaces in more than one area.

Stub areas are areas through which or into which OSPF does not flood AS external link-state advertisements (Type 5 LSAs). You might create stub areas when much of the topology database consists of AS external advertisements and you want to minimize the size of the topology databases on the internal routers in the stub area.

The following restrictions apply to stub areas:

- You cannot create a virtual link through a stub area.
- A stub area cannot contain an AS boundary router.
- You cannot configure the backbone as a stub area.
- You cannot configure an area as both a stub area and a not-so-stubby area (NSSA).

In this example, you configure each routing device in area 7 (area ID 0.0.0.7) as a stub router and some additional settings on the ABR:

- **stub**—Specifies that this area become a stub area and not be flooded with Type 5 LSAs. You must include the **stub** statement on all routing devices that are in area 7 because this area has no external connections.
- **default-metric**—Configures the ABR to generate a default route with a specified metric into the stub area. This default route enables packet forwarding from the stub area to external destinations. You configure this option only on the ABR. The ABR does not automatically generate a default route when attached to a stub. You must explicitly configure this option to generate a default route.
- **no-summaries**—(Optional) Prevents the ABR from advertising summary routes into the stub area by converting the stub area into a totally stubby area. If configured in combination with the **default-metric** statement, a totally stubby area only allows routes internal to the area and advertises the default route into the area. External routes and destinations to other areas are no longer summarized or allowed into a totally stubby area. Only the ABR requires this additional configuration because it is the only routing device within the totally stubby area that creates Type 3 LSAs used to receive and send traffic from outside of the area.




**NOTE:**

In Junos OS Release 8.5 and later, the following applies:

- A router-identifier interface that is not configured to run OSPF is no longer advertised as a stub network in OSPF LSAs.
- OSPF advertises a local route with a prefix length of 32 as a stub link if the loopback interface is configured with a prefix length other than 32. OSPF also advertises the direct route with the configured mask length, as in earlier releases.

**Figure 100: OSPF Network Topology with Stub Areas and NSSAs**

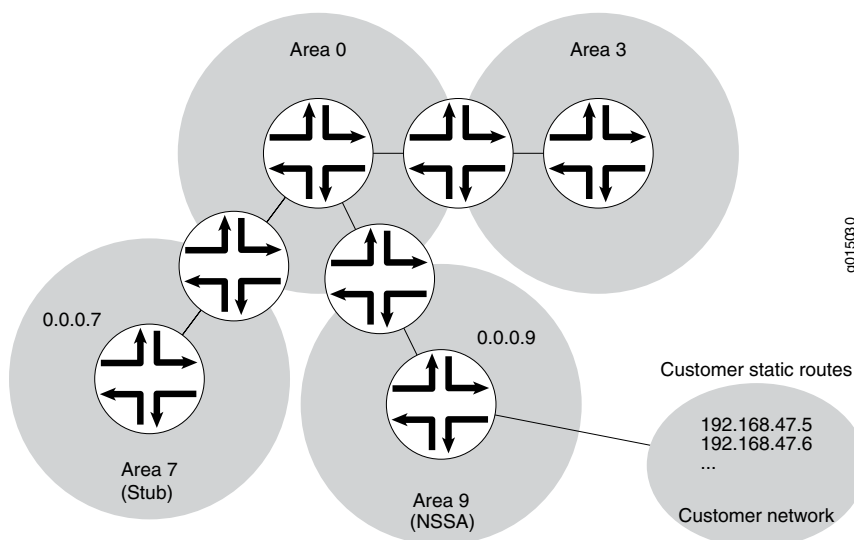

### Configuration

#### CLI Quick Configuration

- To quickly configure an OSPF stub area, copy the following command and paste it into the CLI. You must configure all routing devices that are part of the stub area.

[edit]

```
set protocols ospf area 0.0.0.7 stub
```

- To quickly configure the ABR to inject a default route into the area, copy the following command and paste it into the CLI. You apply this configuration only on the ABR.

[edit]

```
set protocols ospf area 0.0.0.7 stub default-metric 10
```

- (Optional) To quickly configure the ABR to restrict all summary advertisements and allow only internal routes and default route advertisements into the area, copy the following command and paste it into the CLI. You apply this configuration only on the ABR.

[edit]

```
set protocols ospf area 0.0.0.7 stub no-summaries
```



**Step-by-Step  
Procedure**

To configure OSPF stub areas:

1. On all routing devices in the area, configure an OSPF stub area.



**NOTE:** To specify an OSPFv3 stub area, include the `ospf3` statement at the `[edit protocols]` hierarchy level.

```
[edit]
user@host# set protocols ospf area 0.0.0.7 stub
```

2. On the ABR, inject a default route into the area.

```
[edit]
user@host# set protocols ospf area 0.0.0.7 stub default-metric 10
```

3. (Optional) On the ABR, restrict summary LSAs from entering the area. This step converts the stub area into a totally stubby area.

```
[edit]
user@host# set protocols ospf area 0.0.0.7 stub no-summaries
```

4. If you are done configuring the devices, commit the configuration.

```
[edit]
user@host# commit
```

**Results**

Confirm your configuration by entering the `show protocols ospf` command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Configuration on all routing devices:

```
user@host# show protocols ospf
area 0.0.0.7 {
  stub;
}
```

Configuration on the ABR (the output also includes the optional setting):

```
user@host# show protocols ospf
area 0.0.0.7 {
  stub default-metric 10 no-summaries;
}
```

To confirm your OSPFv3 configuration, enter the `show protocols ospf3` command.

**Verification**

Confirm that the configuration is working properly.

- [Verifying the Interfaces in the Area on page 3310](#)
- [Verifying the Type of OSPF Area on page 3310](#)



**Verifying the Interfaces in the Area**

**Purpose** Verify that the interface for OSPF has been configured for the appropriate area. Confirm that the output includes Stub as the type of OSPF area.

**Action** From operational mode, enter the **show ospf interface detail** command for OSPFv2, and enter the **show ospf3 interface detail** command for OSPFv3.

**Verifying the Type of OSPF Area**

**Purpose** Verify that the OSPF area is a stub area. Confirm that the output displays Normal Stub as the Stub type.

**Action** From operational mode, enter the **show ospf overview** command for OSPFv2, and enter the **show ospf3 overview** command for OSPFv3.

---

**Example: Configuring OSPF Not-So-Stubby Areas**

---

This example shows how to configure an OSPF not-so-stubby area (NSSA) to control the advertisement of external routes into an area.

- [Requirements on page 3310](#)
- [Overview on page 3310](#)
- [Configuration on page 3312](#)
- [Verification on page 3314](#)

**Requirements**

Before you begin:

- Configure the device interfaces. See the Router Interfaces or the *Junos OS Interfaces Configuration Guide for Security Devices*.
- Configure the router identifiers for the devices in your OSPF network. See “[Example: Configuring an OSPF Router Identifier](#)” on page 3294.
- Control OSPF designated router election. See “[Example: Controlling OSPF Designated Router Election](#)” on page 3296
- Configure a multiarea OSPF network. See “[Example: Configuring a Multiarea OSPF Network](#)” on page 3301.

**Overview**

The backbone area, which is 0 in [Figure 101 on page 3312](#), has a special function and is always assigned the area ID 0.0.0.0. Area IDs are unique numeric identifiers, in dotted decimal notation. Area IDs need only be unique within an AS. All other networks or areas (such as 3, 7, and 9) in the AS must be directly connected to the backbone area by ABRs that have interfaces in more than one area.



An OSPF stub area has no external routes, so you cannot redistribute routes from another protocol into a stub area. OSPF NSSAs allow external routes to be flooded within the area.

In addition, you might have a situation when exporting Type 7 LSAs into the NSSA is unnecessary. When an AS boundary router is also an ABR with an NSSA attached, Type 7 LSAs are exported into the NSSA by default. If the ABR is attached to multiple NSSAs, a separate Type 7 LSA is exported into each NSSA by default. During route redistribution, this routing device generates both Type 5 LSAs and Type 7 LSAs. You can disable exporting Type 7 LSAs into the NSSA.



**NOTE:** The following restriction applies to NSSAs: You cannot configure an area as both a stub area and an NSSA.

You configure each routing device in area 9 (area ID 0.0.0.9) with the following setting:

- **nssa**—Specifies an OSPF NSSA. You must include the **nssa** statement on all routing devices in area 9 because this area only has external connections to static routes.


You also configure the ABR in area 9 with the following additional settings:

- **no-summaries**—Prevents the ABR from advertising summary routes into the NSSA. If configured in combination with the **default-metric** statement, the NSSA only allows routes internal to the area and advertises the default route into the area. External routes and destinations to other areas are no longer summarized or allowed into the NSSA. Only the ABR requires this additional configuration because it is the only routing device within the NSSA that creates Type 3 LSAs used to receive and send traffic from outside the area.
- **default-lsa**—Configures the ABR to generate a default route into the NSSA. In this example, you configure the following:
  - **default-metric**—Specifies that the ABR generate a default route with a specified metric into the NSSA. This default route enables packet forwarding from the NSSA to external destinations. You configure this option only on the ABR. The ABR does not automatically generate a default route when attached to an NSSA. You must explicitly configure this option for the ABR to generate a default route.
  - **metric-type**—(Optional) Specifies the external metric type for the default LSA, which can be either Type 1 or Type 2. When OSPF exports route information from external ASs, it includes a cost, or external metric, in the route. The difference between the two metrics is how OSPF calculates the cost of the route. Type 1 external metrics are equivalent to the link-state metric, where the cost is equal to the sum of the internal costs plus the external cost. Type 2 external metrics use only the external cost assigned by the AS boundary router. By default, OSPF uses the Type 2 external metric.
  - **type-7**—(Optional) Floods Type 7 default LSAs into the NSSA if the **no-summaries** statement is configured. By default, when the **no-summaries** statement is configured, a Type 3 LSA is injected into NSSAs for Junos OS release 5.0 and later. To support backward compatibility with earlier Junos OS releases, include the **type-7** statement.



The second example also shows the optional configuration required to disable exporting Type 7 LSAs into the NSSA by including the **no-nssa-abr** statement on the routing device that performs the functions of both an ABR and an AS boundary router.

Figure 101: OSPF Network Topology with Stub Areas and NSSAs

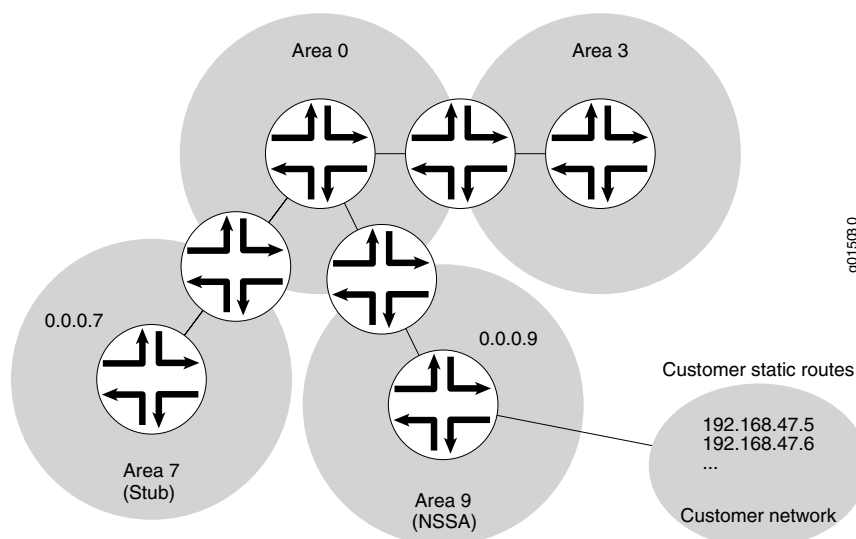

### Configuration

- [Configuring Routing Devices to Participate in a Not-So-Stubby-Area on page 3312](#)
- [Disabling the Export of Type 7 Link State Advertisements into Not-So-Stubby Areas on page 3314](#)

### Configuring Routing Devices to Participate in a Not-So-Stubby-Area

**CLI Quick Configuration** To quickly configure an OSPF NSSA, copy the following command and paste it into the CLI. You must configure all routing devices that are part of the NSSA.

```
[edit]
set protocols ospf area 0.0.0.9 nssa
```

To quickly configure an ABR that participates in an OSPF NSSA, copy the following commands and paste them into the CLI.

```
[edit]
set protocols ospf area 0.0.0.9 nssa default-lsa default-metric 10
set protocols ospf area 0.0.0.9 nssa default-lsa metric-type 1
set protocols ospf area 0.0.0.9 nssa default-lsa type-7
set protocols ospf area 0.0.0.9 nssa no-summaries
```

**Step-by-Step Procedure** To configure OSPF NSSAs:

1. On all routing devices in the area, configure an OSPF NSSA.



**NOTE:** To specify an OSPFv3 NSSA area, include the **ospf3** statement at the **[edit protocols]** hierarchy level.



```
[edit]
user@host# set protocols ospf area 0.0.0.9 nssa
```

2. On the ABR, enter OSPF configuration mode and specify the NSSA area 0.0.0.9 that you already created.

```
[edit ]
user@host# edit protocols ospf area 0.0.0.9 nssa
```

3. On the ABR, inject a default route into the area.

```
[edit protocols ospf area 0.0.0.9 nssa]
user@host# set default-lsa default-metric 10
```

4. (Optional) On the ABR, specify the external metric type for the default route.

```
[edit protocols ospf area 0.0.0.9 nssa]
user@host# set default-lsa metric-type 1
```

5. (Optional) On the ABR, specify the flooding of Type 7 LSAs.

```
[edit protocols ospf area 0.0.0.9 nssa]
user@host# set default-lsa type-7
```

6. On the ABR, restrict summary LSAs from entering the area.

```
[edit protocols ospf area 0.0.0.9 nssa]
user@host# set no-summaries
```

7. If you are done configuring the devices, commit the configuration.

```
[edit protocols ospf area 0.0.0.9 nssa]
user@host# commit
```

**Results** Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Configuration on all routing devices in the area:

```
user@host# show protocols ospf
area 0.0.0.9 {
  nssa;
}
```

Configuration on the ABR. The output also includes the optional **metric-type** and **type-7** statements.

```
user@host# show protocols ospf
area 0.0.0.9 {
  nssa {
    default-lsa {
      default-metric 10;
      metric-type 1;
      type-7;
    }
    no-summaries;
  }
}
```



To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.

#### *Disabling the Export of Type 7 Link State Advertisements into Not-So-Stubby Areas*

**CLI Quick Configuration** To quickly disable exporting Type 7 LSAs into the NSSA, copy the following command and paste it into the CLI. You configure this setting on an AS boundary router that is also an ABR with an NSSA area attached.

```
[edit]
set protocols ospf no-nssa-abr
```

**Step-by-Step Procedure** You can configure this setting if you have an AS boundary router that is also an ABR with an NSSA area attached.

1. Disable exporting Type 7 LSAs into the NSSA.



.....  
**NOTE:** To specify OSPFv3, include the **ospf3** statement at the **[edit protocols]** hierarchy level.  
.....

```
[edit]
user@host# set protocols ospf no-nssa-abr
```

2. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

**Results** Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
no-nssa-abr;
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.

#### *Verification*

Confirm that the configuration is working properly.

- [Verifying the Interfaces in the Area on page 3314](#)
- [Verifying the Type of OSPF Area on page 3315](#)
- [Verifying the Type of LSAs on page 3315](#)

#### *Verifying the Interfaces in the Area*

**Purpose** Verify that the interface for OSPF has been configured for the appropriate area. Confirm that the output includes Stub NSSA as the type of OSPF area.

**Action** From operational mode, enter the **show ospf interface detail** command for OSPFv2, and enter the **show ospf3 interface detail** command for OSPFv3.



**Verifying the Type of OSPF Area**

**Purpose** Verify that the OSPF area is a stub area. Confirm that the output displays Not so Stubby Stub as the Stub type.

**Action** From operational mode, enter the **show ospf overview** command for OSPFv2, and enter the **show ospf3 overview** command for OSPFv3.

**Verifying the Type of LSAs**

**Purpose** Verify the type of LSAs that are in the area. If you disabled exporting Type 7 LSAs into an NSSA, confirm that the Type field does not include NSSA as a type of LSA.

**Action** From operational mode, enter the **show ospf database** command for OSPFv2, and enter the **show ospf3 database** command for OSPFv3.

- Related Documentation**
- [Example: Configuring OSPFv3 Stub and Totally Stubby Areas](#)
  - [OSPF Areas and Router Functionality Overview on page 3287](#)
  - [OSPF Configuration Overview](#)

**Example: Configuring OSPF Multiarea Adjacency**

- [Multiarea Adjacency for OSPF on page 3315](#)
- [Example: Configuring Multiarea Adjacency for OSPF on page 3316](#)

**Multiarea Adjacency for OSPF**

An area is a set of networks and hosts within an autonomous system (AS) that have been administratively grouped together. By default, a single interface can belong to only one OSPF area. However, in some situations, you might want to configure an interface to belong to more than one area. Doing so allows the corresponding link to be considered an intra-area link in multiple areas and to be preferred over other higher-cost intra-area paths. For example, you can configure an interface to belong to multiple areas with a high-speed backbone link between two area border routers (ABRs) so you can create multiarea adjacencies that belong to different areas.

In Junos OS Release 9.2 and later, you can configure a logical interface to belong to more than one OSPFv2 area. Support for OSPFv3 was introduced in Junos OS Release 9.4. As defined in RFC 5185, *OSPF Multi-Area Adjacency*, the ABRs establish multiple adjacencies belonging to different areas over the same logical interface. Each multiarea adjacency is announced as a point-to-point unnumbered link in the configured area by the routers connected to the link. For each area, one of the logical interfaces is treated as primary, and the remaining interfaces that are configured for the area are designated as secondary.

Any logical interface not configured as a secondary interface for an area is treated as the primary interface for that area. A logical interface can be configured as primary interface only for one area. For any other area for which you configure the interface, you must configure it as a secondary interface.



### Example: Configuring Multiarea Adjacency for OSPF

---

This example shows how to configure multiarea adjacency for OSPF.

- [Requirements on page 3316](#)
- [Overview on page 3316](#)
- [Configuration on page 3317](#)
- [Verification on page 3319](#)

#### Requirements

Before you begin, plan your multiarea OSPF network. See [“Example: Configuring a Multiarea OSPF Network” on page 3301](#).

#### Overview

By default, a single interface can belong to only one OSPF area. You can configure a single interface to belong in multiple OSPF areas. Doing so allows the corresponding link to be considered an intra-area link in multiple areas and to be preferred over other higher-cost intra-area paths. When configuring a secondary interface, consider the following:

- For OSPFv2, you cannot configure point-to-multipoint and nonbroadcast multiaccess (NBMA) network interfaces as a secondary interface because secondary interfaces are treated as a point-to-point unnumbered link.
- Secondary interfaces are supported for LAN interfaces (the primary interface can be a LAN interface, but any secondary interfaces are treated as point-to-point unnumbered links over the LAN). In this scenario, you must ensure that there are only two routing devices on the LAN or that there are only two routing devices on the LAN that have secondary interfaces configured for a specific OSPF area.
- Since the purpose of a secondary interface is to advertise a topological path through an OSPF area, you cannot configure a secondary interface or a primary interface with one or more secondary interfaces to be passive. Passive interfaces advertise their address, but do not run the OSPF protocol (adjacencies are not formed and hello packets are not generated).
- Any logical interface not configured as a secondary interface for an area is treated as a primary interface for that area. A logical interface can be configured as the primary interface only for one area. For any other area for which you configure the interface, you must configure it as a secondary interface.
- You cannot configure the **secondary** statement with the **interface all** statement.
- You cannot configure a secondary interface by its IP address.

In this example, you configure an interface to be in two areas, creating a multiarea adjacency with a link between two ABRs: ABR R1 and ABR R2. On each ABR, area 0.0.0.1 contains the primary interface and is the primary link between the ABRs, and area 0.0.0.2 contains the secondary logical interface, which you configure by including the **secondary** statement. You configure interface **so-0/0/0** on ABR R1 and interface **so-1/0/0** on ABR R2.



**Configuration**

**CLI Quick Configuration** To quickly configure a secondary logical interface for an OSPF area, copy the following commands and paste them into the CLI.

Configuration on ABR R1:

```
[edit]
set interfaces so-0/0/0 unit 0 family inet address 192.168.8.45/30
set routing-options router-id 10.255.0.1
set protocols ospf area 0.0.0.1 interface so-0/0/0
set protocols ospf area 0.0.0.2 interface so-0/0/0 secondary
```

Configuration on ABR R2:

```
[edit]
set interfaces so-1/0/0 unit 0 family inet address 192.168.8.37/30
set routing-options router-id 10.255.0.2
set protocols ospf area 0.0.0.1 interface so-1/0/0
set protocols ospf area 0.0.0.2 interface so-1/0/0 secondary
```

**Step-by-Step Procedure** To configure a secondary logical interface:

1. Configure the device interfaces.



**NOTE:** For OSPFv3, on each interface specify the inet6 address family and include the IPv6 address.

```
[edit]
user@R1# set interfaces so-0/0/0 unit 0 family inet address 192.168.8.45/30
```

```
[edit]
user@R2# set interfaces so-1/0/0 unit 0 family inet address 192.168.8.37/30
```

2. Configure the router identifier.

```
[edit]
user@R1# set routing-options router-id 10.255.0.1
```

```
[edit]
user@R2# set routing-options router-id 10.255.0.2
```

3. On each ABR, configure the primary interface for the OSPF area.



**NOTE:** For OSPFv3, include the ospf3 statement at the [edit protocols] hierarchy level.

```
[edit]
user@R1# set protocols ospf 0.0.0.1 interface so-0/0/0
```

```
[edit ]
user@R2# set protocols ospf 0.0.0.2 interface so-1/0/0
```



4. On each ABR, configure the secondary interface for the OSPF area.

```
[edit ]
user@R1# set protocols ospf area 0.0.0.1 so-0/0/0 secondary
```

```
[edit ]
user@R2# set protocols ospf area 0.0.0.2 so-1/0/0 secondary
```

5. If you are done configuring the devices, commit the configuration.

```
[edit protocols ospf area 0.0.0.1 ]
user@host# commit
```

### **Results**

Confirm your configuration by entering the **show interfaces**, **show routing-options**, and the **show protocols ospf** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Configuration on ABR R1:

```
user@R1# show interfaces
so-0/0/0 {
  unit 0 {
    family inet {
      address 192.168.8.45/30;
    }
  }
}

user@R1# show routing-options
router-id 10.255.0.1;

user@R1# show protocols ospf
area 0.0.0.1 {
  interface so-0/0/0.0;
}
area 0.0.0.2 {
  interface so-0/0/0.0 {
    secondary;
  }
}
```

Configuration on ABR R2:

```
user@R2# show interfaces
so-0/0/0 {
  unit 0 {
    family inet {
      address 192.168.8.37/30;
    }
  }
}

user@R2# show routing-options
router-id 10.255.0.2;

user@R2# show protocols ospf
area 0.0.0.1 {
```



```

interface so-1/0/0.0;
}
area 0.0.0.2 {
  interface so-1/0/0.0 {
    secondary;
  }
}

```

### **Verification**

Confirm that the configuration is working properly.

- [Verifying the Secondary Interface on page 3319](#)
- [Verifying the Interfaces in the Area on page 3319](#)
- [Verifying Neighbor Adjacencies on page 3319](#)

### **Verifying the Secondary Interface**

**Purpose** Verify that the secondary interface appears for the configured area. The Secondary field displays if the interface is configured as a secondary interface. The output might also show the same interface listed in multiple areas.

**Action** From operational mode, enter the **show ospf interface detail** command for OSPFv2, and enter the **show ospf3 interface detail** command for OSPFv3.

### **Verifying the Interfaces in the Area**

**Purpose** Verify the interfaces configured for the specified area.

**Action** From operational mode, enter the **show ospf interface area area-id** command for OSPFv2, and enter the **show ospf3 interface area area-id** command for OSPFv3..

### **Verifying Neighbor Adjacencies**

**Purpose** Verify the primary and secondary neighbor adjacencies. The Secondary field displays if the neighbor is on a secondary interface.

**Action** From operational mode, enter the **show ospf neighbor detail** command for OSPFv2, and enter the **show ospf3 neighbor detail** command for OSPFv3.

**Related Documentation**

- [OSPF Areas and Router Functionality Overview on page 3287](#)
- [Understanding OSPF Areas and Backbone Areas on page 3298](#)
- [OSPF Configuration Overview](#)

## **Example: Disabling OSPFv2 Compatibility with RFC 1583**

- [OSPFv2 Compatibility with RFC 1583 Overview on page 3320](#)
- [Example: Disabling OSPFv2 Compatibility with RFC 1583 on page 3320](#)



## OSPFv2 Compatibility with RFC 1583 Overview

---

In the first implementation of OSPF (RFC1583, *OSPF Version 2*), the summary route assumes the cost of the granular route with the lowest cost. OSPF RFC 2328, *OSPF Version 2* changes the behavior so that the summary route assumes the cost of the granular route with the highest cost. OSPF readvertises the summary route whenever the cost of the summary changes. When using the default RFC 1583 behavior, this happens when the granular route with the lowest metric is changed or lost. When RFC 2328 is used, this happens when the granular route with the highest cost is changed or lost.

By default, the Junos OS implementation of OSPF is compatible with RFC 1583. This means that Junos OS maintains a single best route to an autonomous system (AS) boundary router in the OSPF routing table, rather than multiple intra-AS paths, if they are available. You can disable compatibility with RFC 1583. It is preferable to do so when the same external destination is advertised by AS boundary routers that belong to different OSPF areas. When you disable compatibility with RFC 1583, the OSPF routing table maintains the multiple intra-AS paths that are available, which the router uses to calculate AS external routes as defined in RFC 2328. Being able to use multiple available paths to calculate an AS external route can prevent routing loops.

## Example: Disabling OSPFv2 Compatibility with RFC 1583

---

This example shows how to disable OSPFv2 compatibility with RFC 1583 on the routing device.

- [Requirements on page 3320](#)
- [Overview on page 3320](#)
- [Configuration on page 3320](#)
- [Verification on page 3321](#)

### Requirements

No special configuration beyond device initialization is required before disabling OSPFv2 compatibility with RFC 1583.

### Overview

The introduction of RFC 2328 changed the method used to calculate the routes in an OSPF network. By default, the Junos OS implementation of OSPFv2 is compatible with RFC 1583, so OSPF uses the minimum cost to determine the route to any of the networks within the specified range. When you disable RFC 1583 compatibility, OSPF uses the maximum cost to determine the route to any of the networks within the specified range. To minimize the potential for routing loops, configure the same RFC compatibility on all OSPF devices in an OSPF domain.

### Configuration

#### CLI Quick Configuration

To quickly disable OSPFv2 compatibility with RFC 1583, copy the following command and paste it into the CLI. You configure this setting on all devices that are part of the OSPF domain.

[edit]



```
set protocols ospf no-rfc-1583
```

**Step-by-Step Procedure** To disable OSPFv2 compatibility with RFC 1583:

1. Disable RFC 1583.  

```
[edit]  
user@host# set protocols ospf no-rfc-1583
```
2. If you are done configuring the device, commit the configuration.  

```
[edit]  
user@host# commit
```



**NOTE:** Repeat this configuration on each routing device that participates in an OSPF routing domain.

### Results

Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf  
no-rfc-1583;
```

### Verification

Confirm that the configuration is working properly.

#### Verifying the OSPF Routes

**Purpose** Verify that the OSPF routing table maintains the intra-AS paths with the largest metric, which the router uses to calculate AS external routes.

**Action** From operational mode, enter the **show ospf route detail** command.

**Related Documentation**

- [OSPF Overview on page 3282](#)
- [OSPF Configuration Overview](#)

## OSPF Interface Configuration

- [Examples: Configuring OSPF Interfaces on page 3321](#)

### Examples: Configuring OSPF Interfaces

- [About OSPF Interfaces on page 3322](#)
- [Example: Configuring an Interface on a Broadcast or Point-to-Point Network on page 3323](#)



- [Example: Configuring an OSPFv2 Interface on a Nonbroadcast Multiaccess Network on page 3325](#)
- [Example: Configuring an OSPFv2 Interface on a Point-to-Multipoint Network on page 3328](#)
- [Example: Configuring OSPF Demand Circuits on page 3330](#)
- [Example: Configuring a Passive OSPF Interface on page 3332](#)
- [Example: Configuring OSPFv2 Peer interfaces on page 3334](#)

---

### About OSPF Interfaces

To activate OSPF on a network, you must enable the OSPF protocol on one or more interfaces on each device within the network on which traffic is to travel. How you configure the interface depends on whether the interface is connected to a broadcast or point-to-point network, a point-to-multipoint network, a nonbroadcast multiaccess (NBMA) network, or across a demand circuit.

- A broadcast interface behaves as if the routing device is connected to a LAN.
- A point-to-point interface provides a connection between a single source and a single destination (there is only one OSPF adjacency).
- A point-to-multipoint interface provides a connection between a single source and multiple destinations.
- An NBMA interface behaves in a similar fashion to a point-to-multipoint interface, but you might configure an NBMA interface to interoperate with other equipment.
- A demand circuit is a connection on which you can limit traffic based on user agreements. The demand circuit can limit bandwidth or access time based on agreements between the provider and user.

You can also configure an OSPF interface to be passive, to operate in passive traffic engineering mode, or to be a peer interface.

- A passive interface advertises its address, but does not run the OSPF protocol (adjacencies are not formed and hello packets are not generated).
- An interface operating in OSPF passive traffic engineering mode floods link address information within the autonomous system (AS) and makes it available for traffic engineering calculations.
- A peer interface can be configured for OSPFv2 routing devices. A peer interface is required for Generalized MPLS (GMPLS) to transport traffic engineering information through a link separate from the control channel. You establish this separate link by configuring a peer interface. The peer interface name must match the Link Management Protocol (LMP) peer name. A peer interface is optional for a hierarchy of RSVP label-switched paths (LSPs). After you configure the forwarding adjacency, you can configure OSPFv2 to advertise the traffic engineering properties of a forwarding adjacency to a specific peer.

Point-to-point interfaces differ from multipoint in that only one OSPF adjacency is possible. (A LAN, for instance, can have multiple addresses and can run OSPF on each subnet simultaneously.) As such, when you configure a numbered point-to-point interface



to OSPF by name, multiple OSPF interfaces are created. One, which is unnumbered, is the interface on which the protocol is run. An additional OSPF interface is created for each address configured on the interface, if any, which is automatically marked as passive.

For OSPFv3, one OSPF-specific interface must be created per interface name configured under OSPFv3. OSPFv3 does not allow interfaces to be configured by IP address.

Enabling OSPF on an interface (by including the **interface** statement), disabling it (by including the **disable** statement), and not actually having OSPF run on an interface (by including the **passive** statement) are mutually exclusive states.



**NOTE:** When you configure OSPFv2 on an interface, you must also include the **family inet** statement at the [edit interfaces *interface-name* unit *logical-unit-number*] hierarchy level. When you configure OSPFv3 on an interface, you must also include the **family inet6** statement at the [edit interfaces *interface-name* unit *logical-unit-number*] hierarchy level. In Junos OS Release 9.2 and later, you can configure OSPFv3 to support address families other than unicast IPv6.

### Example: Configuring an Interface on a Broadcast or Point-to-Point Network

This example shows how to configure an OSPF interface on a broadcast or point-to-point network.

- [Requirements on page 3323](#)
- [Overview on page 3323](#)
- [Configuration on page 3324](#)
- [Verification on page 3325](#)

#### Requirements

Before you begin:

- Configure the router identifiers for the devices in your OSPF network. See “[Example: Configuring an OSPF Router Identifier](#)” on page 3294.
- Control OSPF designated router election. See “[Example: Controlling OSPF Designated Router Election](#)” on page 3296
- Configure a multiarea OSPF network. See “[Example: Configuring a Multiarea OSPF Network](#)” on page 3301.

#### Overview

If the interface on which you are configuring OSPF supports broadcast mode (such as a LAN), or if the interface supports point-to-point mode (such as a PPP interface or a point-to-point logical interface on Frame Relay), you specify the interface by including the IP address or the interface name for OSPFv2, or only the interface name for OSPFv3. In Junos OS Release 9.3 and later, an OSPF point-to-point interface can be an Ethernet



interface without a subnet. If you configure an interface on a broadcast network, designated router and backup designated router election is performed.



**NOTE:** Using both the interface name and the IP address of the same interface produces an invalid configuration.

In this example, you configure interface **ge-0/2/0** as an OSPFv2 interface in OSPF area 0.0.0.1.

### Configuration

#### CLI Quick Configuration

To quickly configure an OSPF interface on a broadcast or point-to-point network, copy the following commands and paste them into the CLI.

```
[edit]
set interfaces ge-0/2/0 unit 0 family inet address 10.0.0.1
set protocols ospf area 0.0.0.1 interface ge-0/2/0
```

#### Step-by-Step Procedure

To configure an OSPF interface on a broadcast or point-to-point network:

1. Configure the interface.



**NOTE:** For an OSPFv3 interface, specify an IPv6 address.

```
[edit]
user@host# set interfaces ge-0/2/0 unit 0 family inet address 10.0.0.1
```

2. Create an OSPF area.



**NOTE:** For an OSPFv3 interface, include the **ospf3** statement at the **[edit protocols]** hierarchy level.

```
[edit]
user@host# edit protocols ospf area 0.0.0.1
```

3. Assign the interface to the area.

```
[edit protocols ospf area 0.0.0.1 ]
user@host# set interface ge-0/2/0
```

4. If you are done configuring the device, commit the configuration.

```
[edit protocols ospf area 0.0.0.1 ]
user@host# commit
```



### Results

Confirm your configuration by entering the **show interfaces** and the **show protocols ospf** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show interfaces
ge-0/2/0 {
  unit 0 {
    family inet {
      address 10.0.0.1/32;
    }
  }
}

user@host# show protocols ospf
area 0.0.0.1 {
  interface ge-0/2/0.0;
}
```

To confirm your OSPFv3 configuration, enter the **show interfaces** and the **show protocols ospf3** commands.

### Verification

Confirm that the configuration is working properly.

#### Verifying the OSPF Interface

- |                |                                                                                                                                                             |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Purpose</b> | Verify the interface configuration. Depending on your deployment, the Type field might display LAN or P2P.                                                  |
| <b>Action</b>  | From operational mode, enter the <b>show ospf interface detail</b> command for OSPFv2, and enter the <b>show ospf3 interface detail</b> command for OSPFv3. |

### Example: Configuring an OSPFv2 Interface on a Nonbroadcast Multiaccess Network

This example shows how to configure an OSPFv2 interface on a nonbroadcast multiaccess (NBMA) network.

- [Requirements on page 3325](#)
- [Overview on page 3326](#)
- [Configuration on page 3327](#)
- [Verification on page 3328](#)

#### Requirements

Before you begin:

- Configure the router identifiers for the devices in your OSPF network. See [“Example: Configuring an OSPF Router Identifier” on page 3294](#).



- Control OSPF designated router election. See [“Example: Controlling OSPF Designated Router Election” on page 3296](#).
- Configure a multiarea OSPF network. See [“Example: Configuring a Multiarea OSPF Network” on page 3301](#).

### Overview

When you configure OSPFv2 on an NBMA network, you can use nonbroadcast mode rather than point-to-multipoint mode. Using this mode offers no advantages over point-to-multipoint mode, but it has more disadvantages than point-to-multipoint mode. Nevertheless, you might occasionally find it necessary to configure nonbroadcast mode to interoperate with other equipment. Because there is no autodiscovery mechanism, you must configure each neighbor.

Nonbroadcast mode treats the NBMA network as a partially connected LAN, electing designated and backup designated routers. All routing devices must have a direct connection to both the designated and backup designated routers, or unpredictable results occur.

When you configure the interface, specify either the IP address or the interface name. Using both the IP address and the interface name produces an invalid configuration. For nonbroadcast interfaces, specify the IP address of the nonbroadcast interface as the interface name.

In this example, you configure the Asynchronous Transfer Mode (ATM) interface **at-0/1/0** as an OSPFv2 interface in OSPF area 0.0.0.1, and you specify the following settings:

- **interface-type nbma**—Sets the interface to run in NBMA mode. You must explicitly configure the interface to run in NBMA mode.
- **neighbor address <eligible>**—Specifies the IP address of the neighboring device. OSPF routing devices normally discover their neighbors dynamically by listening to the broadcast or multicast hello packets on the network. Because an NBMA network does not support broadcast (or multicast), the device cannot discover its neighbors dynamically, so you must configure all the neighbors statically. To configure multiple neighbors, include multiple **neighbor** statements. If you want the neighbor to be a designated router, include the **eligible** keyword.
- **poll-interval**—Specifies the length of time, in seconds, before the routing device sends hello packets out of the interface before it establishes adjacency with a neighbor. Routing devices send hello packets for a longer interval on nonbroadcast networks to minimize the bandwidth required on slow WAN links. The range is from 1 through 255 seconds. By default, the device sends hello packets out the interface every 120 seconds before it establishes adjacency with a neighbor.

Once the routing device detects an active neighbor, the hello packet interval changes from the time specified in the **poll-interval** statement to the time specified in the **hello-interval** statement.



### Configuration

**CLI Quick Configuration** To quickly configure an OSPFv2 interface on an NBMA network, copy the following commands and paste them into the CLI.

```
[edit]
set interfaces at-0/1/0 unit 0 family inet address 192.0.2.1
set protocols ospf area 0.0.0.1 interface at-0/1/0.0 interface-type nbma
set protocols ospf area 0.0.0.1 interface at-0/1/0.0 neighbor 192.0.2.2 eligible
set protocols ospf area 0.0.0.1 interface at-0/1/0.0 poll-interval 130
```

**Step-by-Step Procedure** To configure an OSPFv2 interface on an NBMA network:

1. Configure the interface.  

```
[edit]
user@host# set interfaces at-0/1/0 unit 0 family inet address 192.0.2.1
```
2. Create an OSPF area.  

```
[edit]
user@host# edit protocols ospf area 0.0.0.1
```
3. Assign the interface to the area.  
 In this example, include the **eligible** keyword to allow the neighbor to be a designated router.  

```
[edit protocols ospf area 0.0.0.1 ]
user@host# set interface at-0/1/0 interface-type nbma neighbor 192.0.2.2 eligible
```
4. Configure the poll interval.  

```
[edit protocols ospf area 0.0.0.1 ]
user@host# set interface at-0/1/0 poll-interval 130
```
5. If you are done configuring the device, commit the configuration.  

```
[edit protocols ospf area 0.0.0.1 ]
user@host# commit
```

### Results

Confirm your configuration by entering the **show interfaces** and the **show protocols ospf** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show interfaces
at-0/1/0 {
  unit 0 {
    family inet {
      address 192.0.2.1/32;
    }
  }
}

user@host# show protocols ospf
area 0.0.0.1 {
  interface at-0/1/0.0 {
```



```
    interface-type nbma;  
    neighbor 192.0.2.2 eligible;  
    poll-interval 130;  
  }  
}
```

### **Verification**

Confirm that the configuration is working properly.

### **Verifying the OSPF Interface**

**Purpose** Verify the interface configuration. Confirm that the Type field displays NBMA.

**Action** From operational mode, enter the **show ospf interface detail** command.

---

### **Example: Configuring an OSPFv2 Interface on a Point-to-Multipoint Network**

This example shows how to configure an OSPFv2 interface on a point-to-multipoint network.

- [Requirements on page 3328](#)
- [Overview on page 3328](#)
- [Configuration on page 3329](#)
- [Verification on page 3329](#)

### **Requirements**

Before you begin:

- Configure the router identifiers for the devices in your OSPF network. See “[Example: Configuring an OSPF Router Identifier](#)” on page 3294.
- Control OSPF designated router election. See “[Example: Controlling OSPF Designated Router Election](#)” on page 3296
- Configure a multiarea OSPF network. See “[Example: Configuring a Multiarea OSPF Network](#)” on page 3301.

### **Overview**

When you configure OSPFv2 on a nonbroadcast multiaccess (NBMA) network, such as a multipoint Asynchronous Transfer Mode (ATM) or Frame Relay, OSPFv2 operates by default in point-to-multipoint mode. In this mode, OSPFv2 treats the network as a set of point-to-point links. Because there is no autodiscovery mechanism, you must configure each neighbor.

When you configure the interface, specify either the IP address or the interface name. Using both the IP address and the interface name produces an invalid configuration.

In this example, you configure ATM interface **at-0/1/0** as an OSPFv2 interface in OSPF area 0.0.0.1, and you specify 192.0.2.1 as the neighbor's IP address.



**Configuration**

**CLI Quick Configuration** To quickly configure an OSPFv2 interface on a point-to-multipoint network, copy the following commands and paste them into the CLI.

```
[edit]
set interfaces at-0/1/0 unit 0 family inet address 192.0.2.2
set protocols ospf area 0.0.0.1 interface at-0/1/0 neighbor 192.0.2.1
```

**Step-by-Step Procedure** To configure an OSPFv2 interface on a point-to-multipoint network:

1. Configure the interface.

```
[edit]
user@host# set interfaces at-0/1/0 unit 0 family inet address 192.0.2.2
```

2. Create an OSPF area.

```
[edit]
user@host# edit protocols ospf area 0.0.0.1
```

3. Assign the interface to the area and specify the neighbor.

```
[edit protocols ospf area 0.0.0.1]
user@host# set interface at-0/1/0 neighbor 192.0.2.1
```

To configure multiple neighbors, include a **neighbor** statement for each neighbor.

4. If you are done configuring the device, commit the configuration.

```
[edit protocols ospf area 0.0.0.1]
user@host# commit
```

**Results**

Confirm your configuration by entering the **show interfaces** and the **show protocols ospf** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show interfaces
at-0/1/0 {
  unit 0 {
    family inet {
      address 192.0.2.2/32;
    }
  }
}

user@host# show protocols ospf
area 0.0.0.1 {
  interface at-0/1/0.0 {
    neighbor 192.0.2.1;
  }
}
```

**Verification**

Confirm that the configuration is working properly.



### *Verifying the OSPF Interface*

**Purpose** Verify the interface configuration. Confirm that the Type field displays P2MP.

**Action** From operational mode, enter the **show ospf interface detail** command.

---

### **Example: Configuring OSPF Demand Circuits**

This example shows how to configure an OSPF demand circuit interface.

- [Requirements on page 3330](#)
- [Overview on page 3330](#)
- [Configuration on page 3331](#)
- [Verification on page 3332](#)

#### **Requirements**

Before you begin:

- Configure the device interfaces. See the Junos® OS Network Interfaces.



**NOTE:** If you are using OSPF demand circuits over an ISDN link, you must configure an ISDN interface and enable dial-on-demand routing. See the Junos® OS Network Interfaces.

- Configure the router identifiers for the devices in your OSPF network. See “[Example: Configuring an OSPF Router Identifier](#)” on page 3294.
- Configure a single-area OSPF network. See “[Example: Configuring a Single-Area OSPF Network](#)” on page 3299.
- Configure a multiarea OSPF network. See “[Example: Configuring a Multiarea OSPF Network](#)” on page 3301.

#### **Overview**

OSPF sends periodic hello packets to establish and maintain neighbor adjacencies and uses link-state advertisements (LSAs) to make routing calculations and decisions. OSPF support for demand circuits is defined in RFC 1793, *Extending OSPF to Support Demand Circuits*, and suppresses the periodic hello packets and LSAs. A demand circuit is a connection on which you can limit traffic based on user agreements. The demand circuit can limit bandwidth or access time based on agreements between the provider and user.

You configure demand circuits on an OSPF interface. When the interface becomes a demand circuit, all hello packets and LSAs are suppressed as soon as OSPF synchronization is achieved. LSAs have a DoNotAge bit that stops the LSA from aging and prevents periodic updates from being sent. Hello packets and LSAs are sent and received on a demand-circuit interface only when there is a change in the network topology. This reduces the amount of traffic through the OSPF interface.



Consider the following when configuring OSPF demand circuits:

- Periodic hellos are only suppressed on point-to-point and point-to-multipoint interfaces. If you configure demand circuits on an OSPF broadcast network or on an OSPF nonbroadcast multiaccess (NBMA) network, periodic hello packets are still sent.
- Demand circuit support on an OSPF point-to-multipoint interface resembles that for point-to-point interfaces. If you configure a point-to-multipoint interface as a demand circuit, the device negotiates hello suppression separately on each interface that is part of the point-to-multipoint network.

This example assumes that you have a point-to-point connection between two devices using SONET/SDH interfaces. A demand-circuit interface automatically negotiates the demand-circuit connection with its OSPF neighbor. If the neighbor does not support demand circuits, then no demand circuit connection is established.

In this example, you configure OSPF interface **so-0/1/0** in OSPF area 0.0.0.1 as a demand circuit.

### Configuration

#### CLI Quick Configuration

To quickly configure an OSPF demand circuit interface, copy the following command and paste it into the CLI. You must configure both neighboring interfaces for OSPF demand circuits for the connection to be established.

```
[edit]
set protocols ospf area 0.0.0.1 interface so-0/1/0 demand-circuit
```

#### Step-by-Step Procedure

To configure an OSPF demand circuit interface on one neighboring interface:

1. Create an OSPF area.



**NOTE:** For OSPFv3, include the `ospf3` statement at the `[edit protocols]` hierarchy level.

```
[edit ]
user@host# edit protocols ospf area 0.0.0.1
```

2. Configure the neighboring interface as a demand circuit.

```
[edit protocols ospf area 0.0.0.1]
user@host# set interface so-0/1/0 demand-circuit
```

3. If you are done configuring the device, commit the configuration.

```
[edit protocols ospf area 0.0.0.1]
user@host# commit
```



**NOTE:** Repeat this entire configuration on the other neighboring interface.



### Results

Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols
ospf {
  area 0.0.0.1 {
    interface so-0/1/0.0 {
      demand-circuit;
    }
  }
}
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.

### Verification

Confirm that the configuration is working properly.

#### Verifying the Status of Neighboring Interfaces

- |                |                                                                                                                                                           |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Purpose</b> | Verify information about the neighboring interface. When the neighbor is configured for demand circuits, a DC flag displays.                              |
| <b>Action</b>  | From operational mode, enter the <b>show ospf neighbor detail</b> command for OSPFv2, and enter the <b>show ospf3 neighbor detail</b> command for OSPFv3. |

---

### Example: Configuring a Passive OSPF Interface

This example shows how to configure a passive OSPF interface. A passive OSPF interface advertises its address but does not run the OSPF protocol.

- [Requirements on page 3332](#)
- [Overview on page 3333](#)
- [Configuration on page 3333](#)
- [Verification on page 3334](#)

#### Requirements

Before you begin:

- Configure the device interfaces. See the Junos® OS Network Interfaces.
- Configure the router identifiers for the devices in your OSPF network. See “[Example: Configuring an OSPF Router Identifier](#)” on page 3294.
- Configure a single-area OSPF network. See “[Example: Configuring a Single-Area OSPF Network](#)” on page 3299.
- Configure a multiarea OSPF network. See “[Example: Configuring a Multiarea OSPF Network](#)” on page 3301.



### Overview

By default, OSPF must be configured on an interface for direct interface addresses to be advertised as interior routes. To advertise the direct interface addresses without actually running OSPF on that interface (adjacencies are not formed and hello packets are not generated), you configure that interface as a passive interface.

Enabling OSPF on an interface (by including the **interface** statement), disabling it (by including the **disable** statement), and not actually having OSPF run on an interface (by including the **passive** statement) are mutually exclusive states.



**NOTE:** If you do not want to see notifications for state changes in a passive OSPF interface, you can disable the OSPF traps for the interface by including the **no-interface-state-traps** statement. The **no-interface-state-traps** statement is supported only for OSPFv2.

In this example, you configure interface **ge-0/2/0** as a passive OSPF interface in area 0.0.0.1 by including the **passive** statement.

### Configuration

#### CLI Quick Configuration

To quickly configure a passive OSPF interface, copy the following command and paste it into the CLI.

```
[edit]
set protocols ospf area 0.0.0.1 interface ge-0/2/0 passive
```

#### Step-by-Step Procedure

To configure a passive OSPF interface:

1. Create an OSPF area.



**NOTE:** For an OSPFv3 interface, include the **ospf3** statement at the **[edit protocols]** hierarchy level.

```
[edit]
user@host# edit protocols ospf area 0.0.0.1
```

2. Configure the passive interface.

```
[edit protocols ospf area 0.0.0.1 ]
user@host# set interface ge-0/2/0 passive
```

3. If you are done configuring the device, commit the configuration.

```
[edit protocols ospf area 0.0.0.1]
user@host# commit
```



### Results

Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
  area 0.0.0.1 {
    interface ge-0/2/0.0 {
      passive;
    }
  }
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.

### Verification

Confirm that the configuration is working properly.

#### Verifying the Status of OSPF Interfaces

**Purpose** Verify the status of the OSPF interface. If the interface is passive, the Adj count field is 0 because no adjacencies have been formed. Next to this field, you might also see the word Passive.

**Action** From operational mode, enter the **show ospf interface detail** command for OSPFv2, and enter the **show ospf3 interface detail** command for OSPFv3.

---

### Example: Configuring OSPFv2 Peer interfaces

This example shows how to configure an OSPFv2 peer interface.

- [Requirements on page 3334](#)
- [Overview on page 3335](#)
- [Configuration on page 3335](#)
- [Verification on page 3335](#)

#### Requirements

Before you begin:

- Configure the device interfaces. See the Junos® OS Network Interfaces.
- Configure the router identifiers for the devices in your OSPF network. See [“Example: Configuring an OSPF Router Identifier” on page 3294](#).
- Configure a single-area OSPF network. See [“Example: Configuring a Single-Area OSPF Network” on page 3299](#).
- Configure a multiarea OSPF network. See [“Example: Configuring a Multiarea OSPF Network” on page 3301](#).
- Configure Generalized MPLS per your network requirements. See LMP Configuration Overview in the Junos OS MPLS Applications Configuration Guide.



### Overview

You can configure an OSPFv2 peer interface for many reasons, including when you configure Generalized MPLS (GMPLS). This example configures a peer interface for GMPLS. GMPLS requires traffic engineering information to be transported through a link separate from the control channel. You establish this separate link by configuring a peer interface. The OSPFv2 peer interface name must match the Link Management Protocol (LMP) peer name. You configure GMPLS and the LMP settings separately from OSPF.

This example assumes that GMPLS and the LMP peer named **oxc1** are already configured, and you need to configure the OSPFv2 peer interface in area 0.0.0.0.

### Configuration

**CLI Quick Configuration** To quickly configure an OSPFv2 peer interface, copy the following command and paste it into the CLI.

```
[edit]
set protocols ospf area 0.0.0.0 peer-interface oxc1
```

**Step-by-Step Procedure** To configure a peer OSPFv2 interface used by the LMP:

1. Create an OSPF area.  

```
[edit]
user@host# edit protocols ospf area 0.0.0.0
```
2. Configure the peer interface.  

```
[edit protocols ospf area 0.0.0.0]
user@host# set peer-interface oxc1
```
3. If you are done configuring the device, commit the configuration.  

```
[edit protocols ospf area 0.0.0.0]
user@host# commit
```

### Results

Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
  area 0.0.0.0 {
    peer-interface oxc1;
  }
```

### Verification

Confirm that the configuration is working properly.

#### Verifying the Configured OSPFv2 Peer

**Purpose** Verify the status of the OSPFv2 peer. When an OSPFv2 peer is configured for GMPLS, the Peer Name field displays the name of the LMP peer that you created for GMPLS, which is also the configured OSPFv2 peer.



**Action** From operational mode, enter the **show link-management** command.

**Related Documentation**

- [OSPF Overview on page 3282](#)
- [OSPF Configuration Overview](#)

---

## OSPF Route Control Configuration

- [Examples: Configuring OSPF Route Summarization on page 3336](#)
- [Examples: Configuring OSPF Traffic Control on page 3345](#)
- [Example: Configuring OSPF Overload Mode on page 3355](#)

### Examples: Configuring OSPF Route Summarization

- [Understanding OSPF Route Summarization on page 3336](#)
- [Example: Summarizing Ranges of Routes in OSPF Link-State Advertisements on page 3336](#)
- [Example: Limiting the Number of Prefixes Exported to OSPF on page 3342](#)
- [Configuring OSPF Refresh and Flooding Reduction in Stable Topologies on page 3344](#)

---

#### Understanding OSPF Route Summarization

Area border routers (ABRs) send summary link advertisements to describe the routes to other areas. Depending on the number of destinations, an area can get flooded with a large number of link-state records, which can utilize routing device resources. To minimize the number of advertisements that are flooded into an area, you can configure the ABR to coalesce, or summarize, a range of IP addresses and send reachability information about these addresses in a single link-state advertisement (LSA). You can summarize one or more ranges of IP addresses, where all routes that match the specified area range are filtered at the area boundary, and the summary is advertised in their place.

For an OSPF area, you can summarize and filter intra-area prefixes. All routes that match the specified area range are filtered at the area boundary, and the summary is advertised in their place. For an OSPF not-so-stubby area (NSSA), you can only coalesce or filter NSSA external (Type 7) LSAs before they are translated into AS external (Type 5) LSAs and enter the backbone area. All external routes learned within the area that do not fall into the range of one of the prefixes are advertised individually to other areas.

In addition, you can also limit the number of prefixes (routes) that are exported into OSPF. By setting a user-defined maximum number of prefixes, you prevent the routing device from flooding an excessive number of routes into an area.

---

#### Example: Summarizing Ranges of Routes in OSPF Link-State Advertisements

This example shows how to summarize routes sent into the backbone area.

- [Requirements on page 3337](#)
- [Overview on page 3337](#)



- [Configuration on page 3338](#)
- [Verification on page 3341](#)

### Requirements

Before you begin:


- Configure the router identifiers for the devices in your OSPF network. See [“Example: Configuring an OSPF Router Identifier” on page 3294](#).
- Control OSPF designated router election. See [“Example: Controlling OSPF Designated Router Election” on page 3296](#)
- Configure a static route. See Examples: Configuring Static Routes in the Junos OS Routing Protocols Configuration Guide.

### Overview

You can summarize a range of IP addresses to minimize the size of the backbone router's link-state database. All routes that match the specified area range are filtered at the area boundary, and the summary is advertised in their place.

[Figure 102 on page 3337](#) shows the topology used in this example. R5 is the ABR between area 0.0.0.4 and the backbone. The networks in area 0.0.0.4 are 10.0.8.4/30, 10.0.8.0/30, and 10.0.8.8/30, which can be summarized as 10.0.8.0/28. R3 is the ABR between NSSA area 0.0.0.3 and the backbone. The networks in area 0.0.0.3 are 10.0.4.4/30, 10.0.4.0/30, and 10.0.4.12/30, which can be summarized as 10.0.4.0/28. Area 0.0.0.3 also contains external static route 3.0.0.8 that you will prevent from flooding throughout the network.

**Figure 102: Summarizing Ranges of Routes in OSPF**

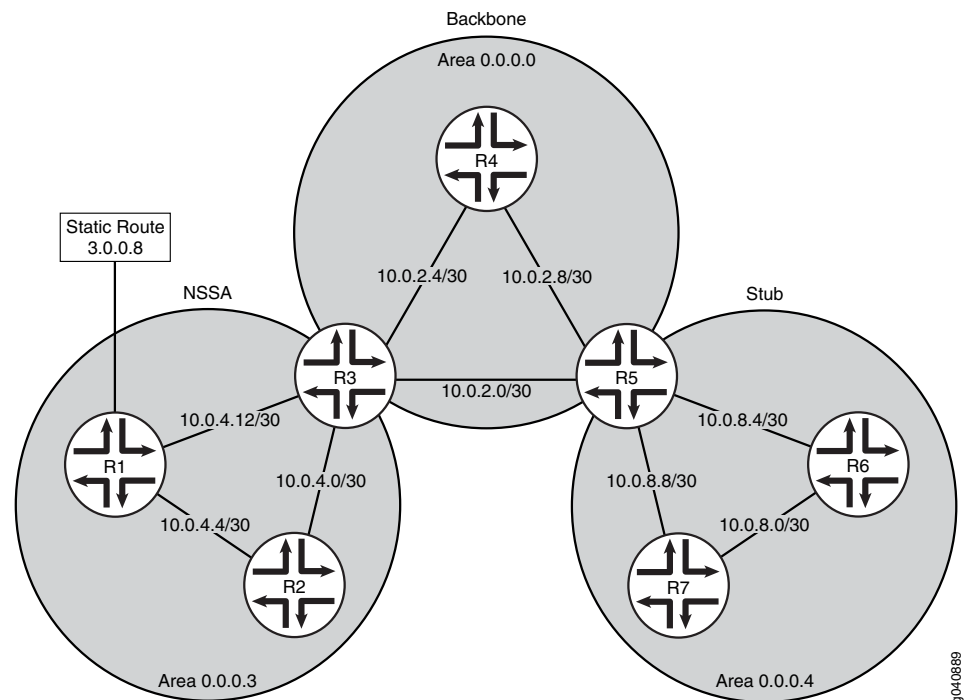



In this example, you configure the ABRs for route summarization by including the following settings:

- **area-range**—For an area, summarizes a range of IP addresses when sending summary intra-area link advertisements. For an NSSA, summarizes a range of IP addresses when sending NSSA link-state advertisements (Type 7 LSAs). The specified prefixes are used to aggregate external routes learned within the area when the routes are advertised to other areas.
- **network/mask-length**—Indicates the summarized IP address range and the number of significant bits in the network mask.
- **restrict**—On the NSSA ABR, prevents the configured summary from being advertised. In this example, we do not want to flood the external route outside of area 0.0.0.3.

### Configuration

#### CLI Quick Configuration

- To quickly configure route summarization for an OSPF area, copy the following commands and paste them into the CLI. The following is the configuration on ABR R5:

```
[edit]
set interfaces fe-0/0/1 unit 0 family inet address 10.0.8.3
set interfaces fe-0/0/2 unit 0 family inet address 10.0.8.4
set interfaces fe-0/0/0 unit 0 family inet address 10.0.2.3
set interfaces fe-0/0/4 unit 0 family inet address 10.0.2.5
set protocols ospf area 0.0.0.4 stub
set protocols ospf area 0.0.0.4 interface fe-0/0/1
set protocols ospf area 0.0.0.4 interface fe-0/0/2
set protocols ospf area 0.0.0.0 interface fe-0/0/0
set protocols ospf area 0.0.0.0 interface fe-0/0/4
set protocols ospf area 0.0.0.4 area-range 10.0.8.0/28
```

- To quickly configure route summarization for an OSPF NSSA, copy the following commands and paste them into the CLI. The following is the configuration on ABR R3:

```
[edit]
set interfaces fe-0/0/1 unit 0 family inet address 10.0.4.10
set interfaces fe-0/0/2 unit 0 family inet address 10.0.4.1
set interfaces fe-0/0/0 unit 0 family inet address 10.0.2.1
set interfaces fe-0/0/4 unit 0 family inet address 10.0.2.7
set protocols ospf area 0.0.0.3 interface fe-0/0/1
set protocols ospf area 0.0.0.3 interface fe-0/0/2
set protocols ospf area 0.0.0.0 interface fe-0/0/0
set protocols ospf area 0.0.0.0 interface fe-0/0/4
set protocols ospf area 0.0.0.3 area-range 10.0.4.0/28
set protocols ospf area 0.0.0.3 nssa
set protocols ospf area 0.0.0.3 nssa area-range 3.0.0.0/8 restrict
```

#### Step-by-Step Procedure

To summarize routes sent to the backbone area:

1. Configure the interfaces.



**NOTE:** For OSPFv3, include IPv6 addresses.



```
[edit]
user@R5# set interfaces fe-0/0/1 unit 0 family inet address 10.0.8.3
user@R5# set interfaces fe-0/0/2 unit 0 family inet address 10.0.8.4
user@R5# set interfaces fe-0/0/0 unit 0 family inet address 10.0.2.3
user@R5# set interfaces fe-0/0/4 unit 0 family inet address 10.0.2.5

[edit]
user@R3# set interfaces fe-0/0/1 unit 0 family inet address 10.0.4.10
user@R3# set interfaces fe-0/0/2 unit 0 family inet address 10.0.4.1
user@R3# set interfaces fe-0/0/0 unit 0 family inet address 10.0.2.1
user@R3# set interfaces fe-0/0/4 unit 0 family inet address 10.0.2.7
```

2. Configure the type of OSPF area.



**NOTE:** For OSPFv3, include the `ospf3` statement at the `[edit protocols]` hierarchy level.

```
[edit]
user@R5# set protocols ospf area 0.0.0.4 stub

[edit]
user@R3# set protocols ospf area 0.0.0.3 nssa
```

3. Assign the interfaces to the OSPF areas.

```
user@R5# set protocols ospf area 0.0.0.4 interface fe-0/0/1
user@R5# set protocols ospf area 0.0.0.4 interface fe-0/0/2
user@R5# set protocols ospf area 0.0.0.0 interface fe-0/0/0
user@R5# set protocols ospf area 0.0.0.0 interface fe-0/0/4

user@R3# set protocols ospf area 0.0.0.3 interface fe-0/0/1
user@R3# set protocols ospf area 0.0.0.3 interface fe-0/0/2
user@R3# set protocols ospf area 0.0.0.0 interface fe-0/0/0
user@R3# set protocols ospf area 0.0.0.0 interface fe-0/0/4
```

4. Summarize the routes that are flooded into the backbone.

```
[edit]
user@R5# set protocols ospf area 0.0.0.4 area-range 10.0.8.0/28

[edit]
user@R3# set protocols ospf area 0.0.0.3 area-range 10.0.4.0/28
```

5. On ABR R3, restrict the external static route from leaving area 0.0.0.3.

```
[edit]
user@R3# set protocols ospf area 0.0.0.3 nssa area-range 3.0.0.0/8 restrict
```

6. If you are done configuring the devices, commit the configuration.

```
[edit]
user@host# commit
```

### Results

Confirm your configuration by entering the `show interfaces` and the `show protocols ospf` commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.



Configuration on ABR R5:

```
user@R5# show interfaces
fe-0/0/0 {
  unit 0 {
    family inet {
      address 10.0.2.3/32;
    }
  }
}
fe-0/0/1 {
  unit 0 {
    family inet {
      address 10.0.8.3/32;
    }
  }
}
fe-0/0/2 {
  unit 0 {
    family inet {
      address 10.0.8.4/32;
    }
  }
}
fe-0/0/4 {
  unit 0 {
    family inet {
      address 10.0.2.5/32;
    }
  }
}

user@R5# show protocols ospf
area 0.0.0.0 {
  interface fe-0/0/0.0;
  interface fe-0/0/4.0;
}
area 0.0.0.4 {
  stub;
  area-range 10.0.8.0/28;
  interface fe-0/0/1.0;
  interface fe-0/0/2.0;
}
```

Configuration on ABR R3:

```
user@R3# show interfaces
fe-0/0/0 {
  unit 0 {
    family inet {
      address 10.0.2.1/32;
    }
  }
}
fe-0/0/1 {
  unit 0 {
    family inet {
```



```

        address 10.0.4.10/32;
    }
}
fe-0/0/2 {
    unit 0 {
        family inet {
            address 10.0.4.1/32;
        }
    }
}
fe-0/0/4 {
    unit 0 {
        family inet {
            address 10.0.2.7/32;
        }
    }
}

user@R3t# show protocols ospf
area 0.0.0.0 {
    interface fe-0/0/0.0;
    interface fe-0/0/4.0;
}
area 0.0.0.3 {
    nssa {
        area-range 3.0.0.0/8 restrict;
    }
    area-range 10.0.4.0/28;
    interface fe-0/0/1.0;
    interface fe-0/0/2.0;
}

```

To confirm your OSPFv3 configuration, enter the **show interfaces** and **show protocols ospf3** commands.

### **Verification**

Confirm that the configuration is working properly.

### **Verifying the Summarized Route**

**Purpose** Verify that the routes you configured for route summarization are being aggregated by the ABRs before the routes enter the backbone area. Confirm route summarization by checking the entries of the OSPF link-state database for the routing devices in the backbone.

**Action** From operational mode, enter the **show ospf database** command for OSPFv2, and enter the **show ospf3 database** command for OSPFv3.



### Example: Limiting the Number of Prefixes Exported to OSPF

---

This example shows how to limit the number of prefixes exported to OSPF.

- [Requirements on page 3342](#)
- [Overview on page 3342](#)
- [Configuration on page 3342](#)
- [Verification on page 3343](#)

#### Requirements

Before you begin:

- Configure the device interfaces. See the Junos® OS Network Interfaces.
- Configure the router identifiers for the devices in your OSPF network. See “[Example: Configuring an OSPF Router Identifier](#)” on page 3294.
- Control OSPF designated router election. See “[Example: Controlling OSPF Designated Router Election](#)” on page 3296
- Configure a single-area OSPF network. See “[Example: Configuring a Single-Area OSPF Network](#)” on page 3299.
- Configure a multiarea OSPF network. See “[Example: Configuring a Multiarea OSPF Network](#)” on page 3301.

#### Overview

By default, there is no limit to the number of prefixes (routes) that can be exported into OSPF. By allowing any number of routes to be exported into OSPF, the routing device can become overwhelmed and potentially flood an excessive number of routes into an area.

You can limit the number of routes exported into OSPF to minimize the load on the routing device and prevent this potential problem. If the routing device exceeds the configured prefix export value, the routing device purges the external prefixes and enters into an overload state. This state ensures that the routing device is not overwhelmed as it attempts to process routing information. The prefix export limit number can be a value from 0 through 4,294,967,295.

In this example, you configure a prefix export limit of 100,000 by including the **prefix-export-limit** statement.

#### Configuration

##### CLI Quick Configuration

To quickly limit the number of prefixes exported to OSPF, copy the following command and paste it into the CLI.

```
[edit]  
set protocols ospf prefix-export-limit 100000
```



**Step-by-Step Procedure** To limit the number of prefixes exported to OSPF:

1. Configure the prefix export limit value.



**NOTE:** For OSPFv3, include the `ospf3` statement at the [edit protocols] hierarchy level.

```
[edit]
user@host# set protocols ospf prefix-export-limit 100000
```

2. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

### Results

Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
prefix-export-limit 100000;
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.

### Verification

Confirm that the configuration is working properly.

#### Verifying the Prefix Export Limit

**Purpose** Verify the prefix export counter that displays the number of routes exported into OSPF.

**Action** From operational mode, enter the **show ospf overview** command for OSPFv2, and enter the **show ospf3 overview** command for OSPFv3.



### Configuring OSPF Refresh and Flooding Reduction in Stable Topologies

---

The OSPF standard requires that every link-state advertisement (LSA) be refreshed every 30 minutes. The Juniper Networks implementation refreshes LSAs every 50 minutes. By default, any LSA that is not refreshed expires after 60 minutes. This requirement can result in traffic overhead that makes it difficult to scale OSPF networks. You can override the default behavior by specifying that the DoNotAge bit be set in self-originated LSAs when they are initially sent by the router or switch. Any LSA with the DoNotAge bit set is reflooded only when a change occurs in the LSA. This feature thus reduces protocol traffic overhead while permitting any changed LSAs to be flooded immediately. Routers or switches enabled for flood reduction continue to send hello packets to their neighbors and to age self-originated LSAs in their databases.

The Juniper implementation of OSPF refresh and flooding reduction is based on RFC 4136, *OSPF Refresh and Flooding Reduction in Stable Topologies*. However, the Juniper implementation does not include the forced-flooding interval defined in the RFC. Not implementing the forced-flooding interval ensures that LSAs with the DoNotAge bit set are reflooded only when a change occurs.

This feature is supported for the following:

- OSPFv2 and OSPFv3 interfaces
- OSPFv3 realms
- OSPFv2 and OSPFv3 virtual links
- OSPFv2 sham links
- OSPFv2 peer interfaces
- All routing instances supported by OSPF
- Logical systems

To configure flooding reduction for an OSPF interface, include the **flood-reduction** statement at the `[edit protocols (ospf | ospf3) area area-id interface interface-id]` hierarchy level.



**NOTE:** If you configure flooding reduction for an interface configured as a demand circuit, the LSAs are not initially flooded, but sent only when their content has changed. Hello packets and LSAs are sent and received on a demand-circuit interface only when a change occurs in the network topology.

---

In the following example, the OSPF interface **so-0/0/1.0** is configured for flooding reduction. As a result, all the LSAs generated by the routes that traverse the specified interface have the DoNotAge bit set when they are initially flooded, and LSAs are refreshed only when a change occurs.

```
[edit]
protocols ospf {
  area 0.0.0.0 {
```



```

interface so-0/0/1.0 {
    flood-reduction;
}
interface lo0.0;
interface so-0/0/0.0;
}

```



**NOTE:** Beginning with Junos OS Release 12.2, you can configure a global default link-state advertisement (LSA) flooding interval in OSPF for self-generated LSAs by including the `lsa-refresh-interval minutes` statement at the `[edit protocols (ospf | ospf3)]` hierarchy level. The Juniper Networks implementation refreshes LSAs every 50 minutes. The range is 25 through 50 minutes. By default, any LSA that is not refreshed expires after 60 minutes.

If you have both the global LSA refresh interval configured for OSPF and OSPF flooding reduction configured for a specific interface in an OSPF area, the OSPF flood reduction configuration takes precedence for that specific interface.

- Related Documentation**
- [OSPF Overview on page 3282](#)
  - [OSPF Configuration Overview](#)

## Examples: Configuring OSPF Traffic Control

- [Understanding OSPF Traffic Control on page 3345](#)
- [Example: Controlling the Cost of Individual OSPF Network Segments on page 3347](#)
- [Example: Dynamically Adjusting OSPF Interface Metrics Based on Bandwidth on page 3351](#)
- [Example: Controlling OSPF Route Preferences on page 3353](#)

### Understanding OSPF Traffic Control

Once a topology is shared across the network, OSPF uses the topology to route packets between network nodes. Each path between neighbors is assigned a cost based on the throughput, round-trip time, and reliability of the link. The sum of the costs across a particular path between hosts determines the overall cost of the path. Packets are then routed along the shortest path using the shortest-path-first (SPF) algorithm. Routes with lower total path metrics are preferred over those with higher path metrics.

You can use the following methods to control OSPF traffic:

- Control the cost of individual OSPF network segments
- Dynamically adjust OSPF interface metrics based on bandwidth
- Control OSPF route selection

#### ***Controlling the Cost of Individual OSPF Network Segments***

OSPF uses the following formula to determine the cost of a route:



$\text{cost} = \text{reference-bandwidth} / \text{interface bandwidth}$

You can modify the reference-bandwidth value, which is used to calculate the default interface cost. The interface bandwidth value is not user-configurable and refers to the actual bandwidth of the physical interface.

By default, OSPF assigns a default cost metric of 1 to any link faster than 100 Mbps, and a default cost metric of 0 to the loopback interface (**lo0**). No bandwidth is associated with the loopback interface.

To control the flow of packets across the network, OSPF allows you to manually assign a cost (or metric) to a particular path segment. When you specify a metric for a specific OSPF interface, that value is used to determine the cost of routes advertised from that interface. For example, if all routers in the OSPF network use default metric values, and you increase the metric on one interface to 5, all paths through that interface have a calculated metric higher than the default and are not preferred.



**NOTE:** Any value you configure for the metric overrides the default behavior of using the reference-bandwidth value to calculate the route cost for that interface.

When there are multiple equal-cost routes to the same destination in a routing table, an equal-cost multipath (ECMP) set is formed. If there is an ECMP set for the active route, the Junos OS software uses a hash algorithm to choose one of the next-hop addresses in the ECMP set to install in the forwarding table.

You can configure Junos OS so that multiple next-hop entries in an ECMP set are installed in the forwarding table. Define a load-balancing routing policy by including one or more **policy-statement** configuration statements at the **[edit policy-options]** hierarchy level, with the action **load-balance per-packet**. Then apply the routing policy to routes exported from the routing table to the forwarding table.

#### ***Dynamically Adjusting OSPF Interface Metrics Based on Bandwidth***

You can specify a set of bandwidth threshold values and associated metric values for an OSPF interface or for a topology on an OSPF interface. When the bandwidth of an interface changes, the Junos OS automatically sets the interface metric to the value associated with the appropriate bandwidth threshold value. Junos OS uses the smallest configured bandwidth threshold value that is equal to or greater than the actual interface bandwidth to determine the metric value. If the interface bandwidth is greater than any of the configured bandwidth threshold values, the metric value configured for the interface is used instead of any of the bandwidth-based metric values configured. The ability to recalculate the metric for an interface when its bandwidth changes is especially useful for aggregate interfaces.



**NOTE:** You must also configure a metric for the interface when you enable bandwidth-based metrics.



### **Controlling OSPF Route Preferences**

You can control the flow of packets through the network using route preferences. Route preferences are used to select which route is installed in the forwarding table when several protocols calculate routes to the same destination. The route with the lowest preference value is selected.

By default, internal OSPF routes have a preference value of 10, and external OSPF routes have a preference value of 150. Although the default settings are appropriate for most environments, you might want to modify the default settings if all of the routing devices in your OSPF network use the default preference values, or if you are planning to migrate from OSPF to a different interior gateway protocol (IGP). If all of the devices use the default route preference values, you can change the route preferences to ensure that the path through a particular device is selected for the forwarding table any time multiple equal-cost paths to a destination exist. When migrating from OSPF to a different IGP, modifying the route preferences allows you to perform the migration in a controlled manner.

### **Example: Controlling the Cost of Individual OSPF Network Segments**

This example shows how to control the cost of individual OSPF network segments.

- [Requirements on page 3347](#)
- [Overview on page 3347](#)
- [Configuration on page 3348](#)
- [Verification on page 3350](#)

#### **Requirements**

Before you begin:

- Configure the device interfaces. See the Router Interfaces or the *Junos OS Interfaces Configuration Guide for Security Devices*.
- Configure the router identifiers for the devices in your OSPF network. See “[Example: Configuring an OSPF Router Identifier](#)” on page 3294.
- Control OSPF designated router election. See “[Example: Controlling OSPF Designated Router Election](#)” on page 3296
- Configure a single-area OSPF network. See “[Example: Configuring a Single-Area OSPF Network](#)” on page 3299.

#### **Overview**

All OSPF interfaces have a cost, which is a routing metric that is used in the link-state calculation. Routes with lower total path metrics are preferred to those with higher path metrics. In this example, we explore how to control the cost of OSPF network segments.

By default, OSPF assigns a default cost metric of 1 to any link faster than 100 Mbps, and a default cost metric of 0 to the loopback interface (**lo0**). No bandwidth is associated with the loopback interface. This means that all interfaces faster than 100 Mbps have the same default cost metric of 1. If multiple equal-cost paths exist between a source



and destination address, OSPF routes packets along each path alternately, in round-robin fashion.


Having the same default metric might not be a problem if all of the interfaces are running at the same speed. If the interfaces operate at different speeds, you might notice that traffic is not routed over the fastest interface because OSPF equally routes packets across the different interfaces. For example, if your routing device has Fast Ethernet and Gigabit Ethernet interfaces running OSPF, each of these interfaces have a default cost metric of 1.

In the first example, you set the reference bandwidth to 10g (10 Gbps, as denoted by 10,000,000,000 bits) by including the **reference-bandwidth** statement. With this configuration, OSPF assigns the Fast Ethernet interface a default metric of 100, and the Gigabit Ethernet interface a metric of 10. Since the Gigabit Ethernet interface has the lowest metric, OSPF selects it when routing packets. The range is 9600 through 1,000,000,000,000 bits.

Figure 103 on page 3348 shows three routing devices in area 0.0.0.0 and assumes that the link between Device R2 and Device R3 is congested with other traffic. You can also control the flow of packets across the network by manually assigning a metric to a particular path segment. Any value you configure for the metric overrides the default behavior of using the reference-bandwidth value to calculate the route cost for that interface. To prevent the traffic from Device R3 going directly to Device R2, you adjust the metric on the interface on Device R3 that connects with Device R1 so that all traffic goes through Device R1.

In the second example, you set the metric to 5 on interface **fe-1/0/1** on Device R3 that connects with Device R1 by including the **metric** statement. The range is 1 through 65,535.

**Figure 103: OSPF Metric Configuration**

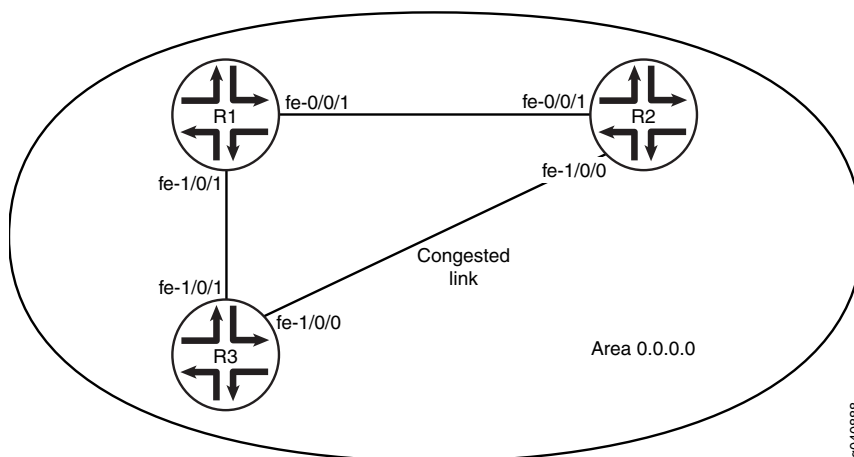

#### Configuration

- [Configuring the Reference Bandwidth on page 3349](#)
- [Configuring a Metric for a Specific OSPF Interface on page 3349](#)



**Configuring the Reference Bandwidth**

**CLI Quick Configuration** To quickly configure the reference bandwidth, copy the following command and paste it into the CLI.

```
[edit]
set protocols ospf reference-bandwidth 10g
```

**Step-by-Step Procedure** To configure the reference bandwidth:

1. Configure the reference bandwidth to calculate the default interface cost.



**NOTE:** To specify OSPFv3, include the `ospf3` statement at the `[edit protocols]` hierarchy level.

```
[edit]
user@host# set protocols ospf reference-bandwidth 10g
```



**TIP:** As a shortcut in this example, you enter `10g` to specify 10 Gbps reference bandwidth. Whether you enter `10g` or `10000000000`, the output of `show protocols ospf` command displays 10 Gbps as `10g`, not `10000000000`.

2. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```



**NOTE:** Repeat this entire configuration on all routing devices in a shared network.

**Results** Confirm your configuration by entering the `show protocols ospf` command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
reference-bandwidth 10g;
```

To confirm your OSPFv3 configuration, enter the `show protocols ospf3` command.

**Configuring a Metric for a Specific OSPF Interface**

**CLI Quick Configuration** To quickly configure a metric for a specific OSPF interface, copy the following command and paste it into the CLI.

```
[edit]
```



```
set protocols ospf area 0.0.0.0 interface fe-1/0/1 metric 5
```

**Step-by-Step  
Procedure**

To configure the metric for a specific OSPF interface:

1. Create an OSPF area.



**NOTE:** To specify OSPFv3, include the `ospf3` statement at the `[edit protocols]` hierarchy level.

```
[edit]
```

```
user@host# edit protocols ospf area 0.0.0.0
```

2. Configure the metric of the OSPF network segment.

```
[edit protocols ospf area 0.0.0.0 ]
```

```
user@host# set interface fe-1/0/1 metric 5
```

3. If you are done configuring the device, commit the configuration.

```
[edit protocols ospf area 0.0.0.0 ]
```

```
user@host# commit
```

**Results**

Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
area 0.0.0.0 {
  interface fe-1/0/1.0 {
    metric 5;
  }
}
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.

**Verification**

Confirm that the configuration is working properly.

- [Verifying the Configured Metric on page 3350](#)
- [Verifying the Route on page 3351](#)

**Verifying the Configured Metric****Purpose**

Verify the metric setting on the interface. Confirm that the Cost field displays the interface's configured metric (cost). When choosing paths to a destination, OSPF uses the path with the lowest cost.

**Action**

From operational mode, enter the **show ospf interface detail** command for OSPFv2, and enter the **show ospf3 interface detail** command for OSPFv3.



**Verifying the Route**

**Purpose** When choosing paths to a destination, OSPF uses the path with the lowest total cost. Confirm that OSPF is using the appropriate path.

**Action** From operational mode, enter the **show route** command.

**Example: Dynamically Adjusting OSPF Interface Metrics Based on Bandwidth**

This example shows how to dynamically adjust OSPF interface metrics based on bandwidth.

- [Requirements on page 3351](#)
- [Overview on page 3351](#)
- [Configuration on page 3352](#)
- [Verification on page 3353](#)

**Requirements**

Before you begin:

- Configure the device interfaces. See the Junos® OS Network Interfaces.
- Configure the router identifiers for the devices in your OSPF network. See “[Example: Configuring an OSPF Router Identifier](#)” on page 3294.
- Control OSPF designated router election. See “[Example: Controlling OSPF Designated Router Election](#)” on page 3296
- Configure a single-area OSPF network. See “[Example: Configuring a Single-Area OSPF Network](#)” on page 3299.

**Overview**

You can specify a set of bandwidth threshold values and associated metric values for an OSPF interface. When the bandwidth of an interface changes, the Junos OS automatically sets the interface metric to the value associated with the appropriate bandwidth threshold value. When you configure bandwidth-based metric values, you typically configure multiple bandwidth and metric values.

In this example, you configure OSPF interface **ae0** for bandwidth-based metrics by including the **bandwidth-based-metrics** statement and the following settings:

- **bandwidth**—Specifies the bandwidth threshold in bits per second. The range is 9600 through 1,000,000,000,000,000.
- **metric**—Specifies the metric value to associate with a specific bandwidth value. The range is 1 through 65,535.



### Configuration

**CLI Quick Configuration** To quickly configure bandwidth threshold values and associated metric values for an OSPF interface, copy the following commands, remove any line breaks, and then paste the commands into the CLI.

```
[edit]
set protocols ospf area 0.0.0.0 interface ae0.0 metric 5
set protocols ospf area 0.0.0.0 interface ae0.0 bandwidth-based-metrics bandwidth 1g
metric 60
set protocols ospf area 0.0.0.0 interface ae0.0 bandwidth-based-metrics bandwidth 10g
metric 50
```

To configure the metric for a specific OSPF interface:

1. Create an OSPF area.



**NOTE:** To specify OSPFv3, include the **ospf3** statement at the **[edit protocols]** hierarchy level.

```
[edit]
user@host# edit protocols ospf area 0.0.0.0
```

2. Configure the metric of the OSPF network segment.

```
[edit protocols ospf area 0.0.0.0 ]
user@host# set interface ae0 metric 5
```

3. Configure the bandwidth threshold values and associated metric values.

```
[edit protocols ospf area 0.0.0.0 ]
user@host# set interface ae0.0 bandwidth-based-metrics bandwidth 1g metric 60
user@host# set interface ae0.0 bandwidth-based-metrics bandwidth 10g metric 50
```

4. If you are done configuring the device, commit the configuration.

```
[edit protocols ospf area 0.0.0.0 ]
user@host# commit
```

**Results** Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
area 0.0.0.0 {
  interface ae0.0 {
    bandwidth-based-metrics {
      bandwidth 1g metric 60;
      bandwidth 10g metric 50;
    }
    metric 5;
  }
}
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.



**Verification**

Confirm that the configuration is working properly.

**Verifying the Configured Metric**

- Purpose** Verify the metric setting on the interface. Confirm that the Cost field displays the interface's configured metric (cost). When choosing paths to a destination, OSPF uses the path with the lowest cost.
- Action** From operational mode, enter the **show ospf interface detail** command for OSPFv2, and enter the **show ospf3 interface detail** command for OSPFv3.

**Example: Controlling OSPF Route Preferences**

This example shows how to control OSPF route selection in the forwarding table. This example also shows how you might control route selection if you are migrating from OSPF to another IGP.

- [Requirements on page 3353](#)
- [Overview on page 3353](#)
- [Configuration on page 3354](#)
- [Verification on page 3355](#)

**Requirements**

This example assumes that OSPF is properly configured and running in your network, and you want to control route selection because you are planning to migrate from OSPF to a different IGP.

- Configure the device interfaces. See the Router Interfaces or the *Junos OS Interfaces Configuration Guide for Security Devices*.
- Configure the IGP that you want to migrate to. See the Junos OS Routing Protocols Configuration Guide.

**Overview**

Route preferences are used to select which route is installed in the forwarding table when several protocols calculate routes to the same destination. The route with the lowest preference value is selected.

By default, internal OSPF routes have a preference value of 10, and external OSPF routes have a preference value of 150. You might want to modify this setting if you are planning to migrate from OSPF to a different IGP. Modifying the route preferences enables you to perform the migration in a controlled manner.

This example makes the following assumptions:

- OSPF is already running in your network.
- You want to migrate from OSPF to IS-IS.



- You configured IS-IS per your network requirements and confirmed it is working properly.

In this example, you increase the OSPF route preference values to make them less preferred than IS-IS routes by specifying 168 for internal OSPF routes and 169 for external OSPF routes. IS-IS internal routes have a preference of either 15 (for Level 1) or 18 (for Level 2), and external routes have a preference of 160 (for Level 1) or 165 (for Level 2). In general, it is preferred to leave the new protocol at its default settings to minimize complexities and simplify any future addition of routing devices to the network. To modify the OSPF route preference values, configure the following settings:

- **preference**—Specifies the route preference for internal OSPF routes. By default, internal OSPF routes have a value of 10. The range is from 0 through 4,294,967,295 ( $2^{32} - 1$ ).
- **external-preference**—Specifies the route preference for external OSPF routes. By default, external OSPF routes have a value of 150. The range is from 0 through 4,294,967,295 ( $2^{32} - 1$ ).

### Configuration

#### CLI Quick Configuration

To quickly configure the OSPF route preference values, copy the following command and paste it into the CLI.

```
[edit]
set protocols ospf preference 168 external-preference 169
```

To configure route selection:

1. Enter OSPF configuration mode and set the external and internal routing preferences.



**NOTE:** To specify OSPFv3, include the **ospf3** statement at the [edit protocols] hierarchy level.

```
[edit]
user@host# set protocols ospf preference 168 external-preference 169
```

2. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

#### Results

Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
preference 168;
external-preference 169;
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.



**Verification**

Confirm that the configuration is working properly.

- [Verifying the Route on page 3355](#)

**Verifying the Route**

**Purpose** Verify that the IGP is using the appropriate route. After the new IGP becomes the preferred protocol (in this example, IS-IS), you should monitor the network for any issues. After you confirm that the new IGP is working properly, you can remove the OSPF configuration from the routing device by entering the **delete ospf** command at the **[edit protocols]** hierarchy level.

**Action** From operational mode, enter the **show route** command.

**Related Documentation**

- [OSPF Overview on page 3282](#)
- OSPF Configuration Overview

**Example: Configuring OSPF Overload Mode**

- [OSPF Overload Function Overview on page 3355](#)
- [Example: Configuring OSPF to Make Routing Devices Appear Overloaded on page 3356](#)

**OSPF Overload Function Overview**

If the time elapsed after the OSPF instance is enabled is less than the specified timeout, overload mode is set.

You can configure the local routing device so that it appears to be overloaded. An overloaded routing device determines it is unable to handle any more OSPF transit traffic, which results in sending OSPF transit traffic to other routing devices. OSPF traffic to directly attached interfaces continues to reach the routing device. You might configure overload mode for many reasons, including:

- If you want the routing device to participate in OSPF routing, but do not want it to be used for transit traffic. This could include a routing device that is connected to the network for analysis purposes, but is not considered part of the production network, such as network management routing devices.
- If you are performing maintenance on a routing device in a production network. You can move traffic off that routing device so network services are not interrupted during your maintenance window.

You configure or disable overload mode in OSPF with or without a timeout. Without a timeout, overload mode is set until it is explicitly deleted from the configuration. With a timeout, overload mode is set if the time elapsed since the OSPF instance started is less than the specified timeout.

A timer is started for the difference between the timeout and the time elapsed since the instance started. When the timer expires, overload mode is cleared. In overload mode,



the router link-state advertisement (LSA) is originated with all the transit router links (except stub) set to a metric of 0xFFFF. The stub router links are advertised with the actual cost of the interfaces corresponding to the stub. This causes the transit traffic to avoid the overloaded routing device and to take paths around the routing device. However, the overloaded routing device's own links are still accessible.



**NOTE:** The routing device can also dynamically enter the overload state, regardless of configuring the device to appear overloaded. For example, if the routing device exceeds the configured OSPF prefix limit, the routing device purges the external prefixes and enters into an overload state. You can limit the number of routes exported into OSPF to minimize the load on the routing device and prevent this potential problem.

---

### Example: Configuring OSPF to Make Routing Devices Appear Overloaded

---

This example shows how to configure a routing device running OSPF to appear to be overloaded.

- [Requirements on page 3356](#)
- [Overview on page 3356](#)
- [Configuration on page 3357](#)
- [Verification on page 3358](#)

#### Requirements

Before you begin:

- Configure the device interfaces. See the Junos® OS Network Interfaces.
- Configure the router identifiers for the devices in your OSPF network. See “[Example: Configuring an OSPF Router Identifier](#)” on page 3294.
- Control OSPF designated router election. See “[Example: Controlling OSPF Designated Router Election](#)” on page 3296
- Configure a single-area OSPF network. See “[Example: Configuring a Single-Area OSPF Network](#)” on page 3299.
- Configure a multiarea OSPF network. See “[Example: Configuring a Multiarea OSPF Network](#)” on page 3301.

#### Overview

You can configure a local routing device running OSPF to appear to be overloaded, which allows the local routing device to participate in OSPF routing, but not for transit traffic. When configured, the transit interface metrics are set to the maximum value of 65535.

This example includes the following settings:

- **overload**—Configures the local routing device so it appears to be overloaded. You might configure this if you want the routing device to participate in OSPF routing, but do not



want it to be used for transit traffic, or you are performing maintenance on a routing device in a production network.

- **timeout seconds**—(Optional) Specifies the number of seconds at which the overload is reset. If no timeout interval is specified, the routing device remains in the overload state until the overload statement is deleted or a timeout is set. In this example, you configure 60 seconds as the amount of time the routing device remains in the overload state. By default, the timeout interval is 0 seconds (this value is not configured). The range is from 60 through 1800 seconds.

### Configuration

**CLI Quick Configuration** To quickly configure a local routing device to appear as overloaded, copy the following command and paste it into the CLI.

```
[edit]
set protocols ospf overload timeout 60
```

**Step-by-Step Procedure** To configure a local routing device to appear overloaded:

1. Enter OSPF configuration mode.



**NOTE:** To specify OSPFv3, include the **ospf3** statement at the **[edit protocols]** hierarchy level.

```
[edit]
user@host edit protocols ospf
```

2. Configure the local routing device to be overloaded.

```
[edit protocols ospf]
user@host set overload
```

3. (Optional) Configure the number of seconds at which overload is reset.

```
[edit protocols ospf]
user@host set overload timeout 60
```

4. If you are done configuring the device, commit the configuration.

```
[edit protocols ospf]
user@host# commit
```

**Results** Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration. The output includes the optional **timeout** statement.

```
user@host# show protocols ospf
overload timeout 60;
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.



**Verification**

Confirm that the configuration is working properly.

- [Verifying Traffic Has Moved Off Devices on page 3358](#)
- [Verifying Transit Interface Metrics on page 3358](#)
- [Verifying the Overload Configuration on page 3358](#)
- [Verifying the Viable Next Hop on page 3358](#)

**Verifying Traffic Has Moved Off Devices**

**Purpose** Verify that the traffic has moved off the upstream devices.

**Action** From operational mode, enter the **show interfaces detail** command.

**Verifying Transit Interface Metrics**

**Purpose** Verify that the transit interface metrics are set to the maximum value of 65535 on the downstream neighboring device.

**Action** From operational mode, enter the **show ospf database router detail advertising-router address** command for OSPFv2, and enter the **show ospf3 database router detail advertising-router address** command for OSPFv3.

**Verifying the Overload Configuration**

**Purpose** Verify that overload is configured by reviewing the Configured overload field. If the overload timer is also configured, this field also displays the time that remains before it is set to expire.

**Action** From operational mode, enter the **show ospf overview** command for OSPFv2, and the **show ospf3 overview** command for OSPFv3.

**Verifying the Viable Next Hop**

**Purpose** Verify the viable next hop configuration on the upstream neighboring device. If the neighboring device is overloaded, it is not used for transit traffic and is not displayed in the output.

**Action** From operational mode, enter the **show route address** command.

**Related Documentation**

- [OSPF Overview on page 3282](#)
- [OSPF Configuration Overview](#)



---

## OSPF Fault Detection Configuration

---

- [Example: Configuring OSPF Timers on page 3359](#)
- [Example: Configuring BFD for OSPF on page 3365](#)
- [Example: Configuring BFD Authentication for OSPF on page 3371](#)

### Example: Configuring OSPF Timers

- [OSPF Timers Overview on page 3359](#)
- [Example: Configuring OSPF Timers on page 3360](#)

---

#### OSPF Timers Overview

OSPF routing devices constantly track the status of their neighbors, sending and receiving hello packets that indicate whether each neighbor still is functioning, and sending and receiving link-state advertisement (LSA) and acknowledgment packets. OSPF sends packets and expects to receive packets at specified intervals.

You configure OSPF timers on the interface of the routing device participating in OSPF. Depending on the timer, the configured interval must be the same on all routing devices on a shared network (area).

You can configure the following OSPF timers:

- **Hello interval**—Routing devices send hello packets at a fixed interval on all interfaces, including virtual links, to establish and maintain neighbor relationships. The hello interval specifies the length of time, in seconds, before the routing device sends a hello packet out of an interface. This interval must be the same on all routing devices on a shared network. By default, the routing device sends hello packets every 10 seconds (broadcast and point-to-point networks) and 30 seconds (nonbroadcast multiple access (NBMA) networks).
- **Poll interval**—(OSPFv2, Nonbroadcast networks only) Routing devices send hello packets for a longer interval on nonbroadcast networks to minimize the bandwidth required on slow WAN links. The poll interval specifies the length of time, in seconds, before the routing device sends hello packets out of the interface before establishing adjacency with a neighbor. By default, the routing device sends hello packets every 120 seconds until active neighbors are detected.

Once the routing device detects an active neighbor, the hello packet interval changes from the time specified in the poll interval to the time specified in the hello interval.

- **LSA retransmission interval**—When a routing device sends LSAs to its neighbors, the routing device expects to receive an acknowledgment packet from each neighbor within a certain amount of time. The LSA retransmission interval specifies the length of time, in seconds, that the routing device waits to receive an LSA packet before retransmitting the LSA to an interface's neighbors. By default, the routing device waits 5 seconds for an acknowledgment before retransmitting the LSA.
- **Dead interval**—If a routing device does not receive a hello packet from a neighbor within a fixed amount of time, the routing device modifies its topology database to indicate



that the neighbor is nonoperational. The dead interval specifies the length of time, in seconds, that the routing device waits before declaring that a neighboring routing device is unavailable. This is an interval during which the routing device receives no hello packets from the neighbor. This interval must be the same on all routing devices on a shared network. By default, this interval is four times the default hello interval, which is 40 seconds (broadcast and point-to-point networks) and 120 seconds (NBMA networks).

- Transit delay—Before a link-state update packet is propagated out of an interface, the routing device must increase the age of the packet. The transit delay sets the estimated time required to transmit a link-state update on the interface. By default, the transit delay is 1 second. You should never have to modify the transit delay time.

---

### Example: Configuring OSPF Timers

This example shows how to configure the OSPF timers.

- [Requirements on page 3360](#)
- [Overview on page 3360](#)
- [Configuration on page 3362](#)
- [Verification on page 3365](#)

#### **Requirements**

Before you begin:

- Configure the device interfaces. See the Junos® OS Network Interfaces.
- Configure the router identifiers for the devices in your OSPF network. See “[Example: Configuring an OSPF Router Identifier](#)” on page 3294.
- Control OSPF designated router election. See “[Example: Controlling OSPF Designated Router Election](#)” on page 3296
- Configure a single-area OSPF network. See “[Example: Configuring a Single-Area OSPF Network](#)” on page 3299.
- Configure a multiarea OSPF network. See “[Example: Configuring a Multiarea OSPF Network](#)” on page 3301.

#### **Overview**

The default OSPF timer settings are optimal for most networks. However, depending on your network requirements, you might need to modify the timer settings. This example explains why you might need to modify the following timers:

- Hello interval
- Dead interval
- LSA retransmission interval
- Transit delay

#### **Hello Interval and Dead Interval**



The hello interval and the dead interval optimize convergence times by efficiently tracking neighbor status. By lowering the values of the hello interval and the dead interval, you can increase the convergence of OSPF routes if a path fails. These intervals must be the same on all routing devices on a shared network. Otherwise, OSPF cannot establish the appropriate adjacencies.

In the first example, you lower the hello interval to 2 seconds and the dead interval to 8 seconds on point-to-point OSPF interfaces **fe-0/0/1** and **fe-1/0/1** in area 0.0.0.0 by configuring the following settings:

- **hello-interval**—Specifies the length of time, in seconds, before the routing device sends a hello packet out of an interface. By default, the routing device sends hello packets every 10 seconds. The range is from 1 through 255 seconds.
- **dead-interval**—Specifies the length of time, in seconds, that the routing device waits before declaring that a neighboring routing device is unavailable. This is an interval during which the routing device receives no hello packets from the neighbor. By default, the routing device waits 40 seconds (four times the hello interval). The range is 1 through 65,535 seconds.

### LSA Retransmission Interval

The link-state advertisement (LSA) retransmission interval optimizes the sending and receiving of LSA and acknowledgement packets. You must configure the LSA retransmission interval to be equal to or greater than 3 seconds to avoid triggering a retransmit trap because the Junos OS delays LSA acknowledgments by up to 2 seconds. If you have a virtual link, you might find increased performance by increasing the value of the LSA retransmission interval.

In the second example, you increase the LSA retransmission timer to 8 seconds on OSPF interface **fe-0/0/1** in area 0.0.0.1 by configuring the following setting:

- **retransmit-interval**—Specifies the length of time, in seconds, that the routing device waits to receive an LSA packet before retransmitting LSA to an interface's neighbors. By default, the routing device retransmits LSAs to its neighbors every 5 seconds. The range is from 1 through 65,535 seconds.

### Transit Delay

The transit delay sets the time the routing device uses to age a link-state update packet. If you have a slow link (for example, one with an average propagation delay of multiple seconds), you should increase the age of the packet by a similar amount. Doing this ensures that you do not receive a packet back that is younger than the original copy.



In the final example, you increase the transit delay to 2 seconds on OSPF interface **fe-1/0/1** in area 0.0.0.1. By configuring the following setting, this causes the routing device to age the link-state update packet by 2 seconds:

- **transit-delay**—Sets the estimated time required to transmit a link-state update on the interface. You should never have to modify the transit delay time. By default, the routing device ages the packet by 1 second. The range is from 1 through 65,535 seconds.

### Configuration

- [Configuring the Hello Interval and the Dead Interval on page 3362](#)
- [Controlling the LSA Retransmission Interval on page 3363](#)
- [Specifying the Transit Delay on page 3364](#)

### Configuring the Hello Interval and the Dead Interval

#### CLI Quick Configuration

To quickly configure the hello and dead intervals, copy the following commands and paste them into the CLI.

```
[edit]
set protocols ospf area 0.0.0.0 interface fe-0/0/1 hello-interval 2
set protocols ospf area 0.0.0.0 interface fe-0/0/1 dead-interval 8
set protocols ospf area 0.0.0.0 interface fe-1/0/1 hello-interval 2
set protocols ospf area 0.0.0.0 interface fe-1/0/1 dead-interval 8
```

#### Step-by-Step Procedure

To configure the hello and dead intervals:

1. Create an OSPF area.



**NOTE:** To specify OSPFv3, include the **ospf3** statement at the **[edit protocols]** hierarchy level.

```
[edit]
user@host# edit protocols ospf area 0.0.0.0
```

2. Specify the interfaces.

```
[edit protocols ospf area 0.0.0.0]
user@host# set interface fe-0/0/1
user@host# set interface fe-1/0/1
```

3. Configure the hello interval.

```
[edit protocols ospf area 0.0.0.0 ]
user@host# set interface fe-0/0/1 hello-interval 2
user@host# set interface fe-1/0/1 hello-interval 2
```

4. Configure the dead interval.

```
[edit protocols ospf area 0.0.0.0 ]
user@host# set interface fe-0/0/1 dead-interval 8
user@host# set interface fe-1/0/1 dead-interval 8
```

5. If you are done configuring the device, commit the configuration.



```
[edit protocols ospf area 0.0.0.0 ]
user@host# commit
```



**NOTE:** Repeat this entire configuration on all routing devices in a shared network.

**Results** Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
area 0.0.0.0 {
  interface fe-0/0/1.0 {
    hello-interval 2;
    dead-interval 8;
  }
  interface fe-1/0/1.0 {
    hello-interval 2;
    dead-interval 8;
  }
}
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.

#### *Controlling the LSA Retransmission Interval*

**CLI Quick Configuration** To quickly configure the LSA retransmission interval, copy the following command and paste it into the CLI.

```
[edit]
set protocols ospf area 0.0.0.1 interface fe-0/0/1 retransmit-interval 8
```

**Step-by-Step Procedure** To configure the LSA retransmission interval:

1. Create an OSPF area.



**NOTE:** To specify OSPFv3, include the **ospf3** statement at the **[edit protocols]** hierarchy level.

```
[edit]
user@host# edit protocols ospf area 0.0.0.1
```

2. Specify the interface.

```
[edit protocols ospf area 0.0.0.1]
user@host# set interface fe-0/0/1
```

3. Configure the LSA retransmission interval.

```
[edit protocols ospf area 0.0.0.1 ]
user@host# set interface fe-0/0/1 retransmit-interval 8
```



4. If you are done configuring the device, commit the configuration.

```
[edit protocols ospf area 0.0.0.1]
user@host# commit
```

**Results** Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
area 0.0.0.1 {
  interface fe-0/0/1.0 {
    retransmit-interval 8;
  }
}
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.

### *Specifying the Transit Delay*

**CLI Quick Configuration** To quickly configure the transit delay, copy the following command and paste it into the CLI.

```
[edit]
set protocols ospf area 0.0.0.1 interface fe-1/0/1 transit-delay 2
```

**Step-by-Step Procedure** To configure the transit delay:

1. Create an OSPF area.



**NOTE:** To specify OSPFv3, include the **ospf3** statement at the **[edit protocols]** hierarchy level.

```
[edit]
user@host# edit protocols ospf area 0.0.0.1
```

2. Specify the interface.

```
[edit protocols ospf area 0.0.0.1]
user@host# set interface fe-1/0/1
```

3. Configure the transit delay.

```
[edit protocols ospf area 0.0.0.1 ]
user@host# set interface fe-1/0/1 transit-delay 2
```

4. If you are done configuring the device, commit the configuration.

```
[edit protocols ospf area 0.0.0.1 ]
user@host# commit
```

**Results** Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.



```

user@host# show protocols ospf
area 0.0.0.1 {
  interface fe-1/0/1.0 {
    transit-delay 2;
  }
}

```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.

### Verification

Confirm that the configuration is working properly.

### Verifying the Timer Configuration

**Purpose** Verify that the interface for OSPF or OSPFv3 has been configured with the applicable timer values. Confirm that the Hello field, the Dead field, and the ReXmit field display the values that you configured.

**Action** From operational mode, enter the **show ospf interface detail** for OSPFv2, and enter the **show ospf3 interface detail** command for OSPFv3.

**Related Documentation**

- [OSPF Overview on page 3282](#)
- [OSPF Configuration Overview](#)

## Example: Configuring BFD for OSPF

- [BFD for OSPF Overview on page 3365](#)
- [Example: Configuring BFD for OSPF on page 3367](#)

### BFD for OSPF Overview

The Bidirectional Forwarding Detection (BFD) protocol is a simple hello mechanism that detects failures in a network. BFD works with a wide variety of network environments and topologies. A pair of routing devices exchange BFD packets. Hello packets are sent at a specified, regular interval. A neighbor failure is detected when the routing device stops receiving a reply after a specified interval. The BFD failure detection timers have shorter time limits than the OSPF failure detection mechanisms, so they provide faster detection.

The BFD failure detection timers are adaptive and can be adjusted to be faster or slower. The lower the BFD failure detection timer value, the faster the failure detection and vice versa. For example, the timers can adapt to a higher value if the adjacency fails (that is, the timer detects failures more slowly). Or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. A back-off algorithm increases the receive (Rx) interval by two if the local BFD instance is the reason for the session flap. The transmission (Tx) interval is increased by two if the remote BFD instance is the reason for the session flap. You can use the **clear bfd adaptation** command to return BFD interval timers to their configured values. The **clear bfd adaptation** command is hitless, meaning that the command does not affect traffic flow on the routing device.





**NOTE:** BFD is supported for OSPFv3 in Junos OS Release 9.3 and later.

You can configure the following BFD protocol settings:

- **detection-time threshold**—Threshold for the adaptation of the detection time. When the BFD session detection time adapts to a value equal to or greater than the configured threshold, a single trap and a single system log message are sent.
- **full-neighbors-only**—Ability to establish BFD sessions only for OSPF neighbors with full neighbor adjacency. The default behavior is to establish BFD sessions for all OSPF neighbors. This setting is available in Junos OS Release 9.5 and later.
- **minimum-interval**—Minimum transmit and receive interval for failure detection. This setting configures both the minimum interval after which the local routing device transmits hello packets and the minimum interval after which the routing device expects to receive a reply from the neighbor with which it has established a BFD session. Both intervals are in milliseconds. You can also specify the minimum transmit and receive intervals separately using the **transmit-interval** **minimum-interval** and **minimum-receive-interval** statements.



**NOTE:** BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD of less than 100 ms for Routing Engine-based sessions and 10 ms for distributed BFD sessions can cause undesired BFD flapping.

Depending on your network environment, these additional recommendations might apply:

- For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of 300 ms for Routing Engine-based sessions and 100 ms for distributed BFD sessions.
  - For very large-scale network deployments with a large number of BFD sessions, contact Juniper Networks customer support for more information.
  - For BFD sessions to remain up during a Routing Engine switchover event when nonstop active routing (NSR) is configured, specify a minimum interval of 2500 ms for Routing Engine-based sessions. Without NSR, Routing Engine-based sessions can have a minimum interval of 100 ms. In OSPFv3, BFD is always based in the Routing Engine, meaning that BFD is not distributed. For distributed BFD sessions with NSR configured, the minimum interval recommendations are unchanged and depend only on your network deployment.
- **minimum-receive-interval**—Minimum receive interval for failure detection. This setting configures the minimum receive interval, in milliseconds, after which the routing device expects to receive a hello packet from a neighbor with which it has established a BFD



session. You can also specify the minimum receive interval using the **minimum-interval** statement.

- **multiplier**—Multiplier for hello packets. This setting configures the number of hello packets that are not received by a neighbor, which causes the originating interface to be declared down. By default, three missed hello packets cause the originating interface to be declared down.
- **no-adaptation**—Disables BFD adaptation. This setting disables BFD sessions from adapting to changing network conditions. This setting is available in Junos OS Release 9.0 and later.



**NOTE:** We recommend that you do not disable BFD adaptation unless it is preferable not to have BFD adaptation in your network.

- **transmit-interval minimum-interval**—Minimum transmit interval for failure detection. This setting configures the minimum transmit interval, in milliseconds, at which the local routing device transmits hello packets to the neighbor with which it has established a BFD session. You can also specify the minimum transmit interval using the **minimum-interval** statement.
- **transmit-interval threshold**—Threshold for the adaptation of the BFD session transmit interval. When the transmit interval adapts to a value greater than the threshold, a single trap and a single system log message are sent. The threshold value must be greater than the minimum transmit interval. If you attempt to commit a configuration with a threshold value less than the minimum transmit interval, the routing device displays an error and does not accept the configuration.
- **version**—BFD version. This setting configures the BFD version used for detection. You can explicitly configure BFD version 1, or the routing device can automatically detect the BFD version. By default, the routing device automatically detects the BFD version automatically, which is either 0 or 1.

You can also trace BFD operations for troubleshooting purposes.

### Example: Configuring BFD for OSPF

This example shows how to configure the Bidirectional Forwarding Detection (BFD) protocol for OSPF.

- [Requirements on page 3367](#)
- [Overview on page 3368](#)
- [Configuration on page 3369](#)
- [Verification on page 3370](#)

#### Requirements

Before you begin:



- Configure the device interfaces. See the Junos® OS Network Interfaces.
- Configure the router identifiers for the devices in your OSPF network. See [“Example: Configuring an OSPF Router Identifier” on page 3294](#).
- Control OSPF designated router election. See [“Example: Controlling OSPF Designated Router Election” on page 3296](#).
- Configure a single-area OSPF network. See [“Example: Configuring a Single-Area OSPF Network” on page 3299](#).
- Configure a multiarea OSPF network. See [“Example: Configuring a Multiarea OSPF Network” on page 3301](#).
- Configure a multiarea OSPF network. See [“Example: Configuring a Multiarea OSPF Network” on page 3301](#).

### Overview

An alternative to adjusting the OSPF hello interval and dead interval settings to increase route convergence is to configure BFD. The BFD protocol is a simple hello mechanism that detects failures in a network. The BFD failure detection timers have shorter timer limits than the OSPF failure detection mechanisms, thereby providing faster detection.

BFD is useful on interfaces that are unable to detect failure quickly, such as Ethernet interfaces. Other interfaces, such as SONET interfaces, already have built-in failure detection. Configuring BFD on those interfaces is unnecessary.

You configure BFD on a pair of neighboring OSPF interfaces. Unlike the OSPF hello interval and dead interval settings, you do not have to enable BFD on all interfaces in an OSPF area.

In this example, you enable failure detection by including the **bfd-liveness-detection** statement on the neighbor OSPF interface **fe-0/1/0** in area 0.0.0.0 and configure the BFD packet exchange interval to 300 milliseconds, configure 4 as the number of missed hello packets that causes the originating interface to be declared down, and configure BFD sessions only for OSPF neighbors with full neighbor adjacency by including the following settings:

- **full-neighbors-only**—In Junos OS Release 9.5 and later, configures the BFD protocol to establish BFD sessions only for OSPF neighbors with full neighbor adjacency. The default behavior is to establish BFD sessions for all OSPF neighbors.
- **minimum-interval**—Configures the minimum interval, in milliseconds, after which the local routing device transmits hello packets as well as the minimum interval after which the routing device expects to receive a reply from the neighbor with which it has established a BFD session. You can configure a number in the range from 1 through 255,000 milliseconds. You can also specify the minimum transmit and receive intervals separately using the **transmit-interval** **minimum-interval** and **minimum-receive-interval** statements.





**NOTE:** BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD of less than 100 ms for Routing Engine-based sessions and 10 ms for distributed BFD sessions can cause undesired BFD flapping.

Depending on your network environment, these additional recommendations might apply:

- For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of 300 ms for Routing Engine-based sessions and 100 ms for distributed BFD sessions.
  - For very large-scale network deployments with a large number of BFD sessions, contact Juniper Networks customer support for more information.
  - For BFD sessions to remain up during a Routing Engine switchover event when nonstop active routing (NSR) is configured, specify a minimum interval of 2500 ms for Routing Engine-based sessions. For distributed BFD sessions with NSR configured, the minimum interval recommendations are unchanged and depend only on your network deployment.
- **multiplier**—Configures the number of hello packets not received by a neighbor that causes the originating interface to be declared down. By default, three missed hello packets cause the originating interface to be declared down. You can configure a value in the range from 1 through 255.

### Configuration

#### CLI Quick Configuration

To quickly configure the BFD protocol for OSPF, copy the following commands, remove any line breaks, and then paste the commands into the CLI.

```
[edit]
set protocols ospf area 0.0.0.0 interface fe-0/0/1 bfd-liveness-detection minimum-interval
300
set protocols ospf area 0.0.0.0 interface fe-0/0/1 bfd-liveness-detection multiplier 4
set protocols ospf area 0.0.0.0 interface fe-0/0/1 bfd-liveness-detection full-neighbors-only
```

#### Step-by-Step Procedure

To configure the BFD protocol for OSPF on one neighboring interface:

1. Create an OSPF area.



**NOTE:** To specify OSPFv3, include the `ospf3` statement at the `[edit protocols]` hierarchy level.

```
[edit]
user@host# edit protocols ospf area 0.0.0.0
```

2. Specify the interface.



```
[edit protocols ospf area 0.0.0.0]
user@host# set interface fe-0/0/1
```

3. Specify the minimum transmit and receive intervals.

```
[edit protocols ospf area 0.0.0.0 ]
user@host# set interface fe-0/0/1 bfd-liveness-detection minimum-interval 300
```

4. Configure the number of missed hello packets that cause the originating interface to be declared down.

```
[edit protocols ospf area 0.0.0.0 ]
user@host# set interface fe-0/0/1 bfd-liveness-detection multiplier 4
```

5. Configure BFD sessions only for OSPF neighbors with full neighbor adjacency.

```
[edit protocols ospf area 0.0.0.0 ]
user@host# set interface fe-0/0/1 bfd-liveness-detection full-neighbors-only
```

6. If you are done configuring the device, commit the configuration.

```
[edit protocols ospf area 0.0.0.0 ]
user@host# commit
```



**NOTE:** Repeat this entire configuration on the other neighboring interface.

**Results** Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
area 0.0.0.0 {
  interface fe-0/0/1.0 {
    bfd-liveness-detection {
      minimum-interval 300;
      multiplier 4;
      full-neighbors-only;
    }
  }
}
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.

### **Verification**

Confirm that the configuration is working properly.

### **Verifying the BFD Sessions**

**Purpose** Verify that the OSPF interfaces have active BFD sessions, and that session components have been configured correctly.

**Action** From operational mode, enter the **show bfd session detail** command.



**Meaning** The output displays information about the BFD sessions.

- The Address field displays the IP address of the neighbor.
- The Interface field displays the interface you configured for BFD.
- The State field displays the state of the neighbor and should show Full to reflect the full neighbor adjacency that you configured.
- The Transmit Interval field displays the time interval you configured to send BFD packets.
- The Multiplier field displays the multiplier you configured.

**Related Documentation**

- [OSPF Configuration Overview](#)
- [BFD Authentication for OSPF Overview on page 3371](#)

## Example: Configuring BFD Authentication for OSPF

- [BFD Authentication for OSPF Overview on page 3371](#)
- [Configuring BFD Authentication for OSPF on page 3373](#)

### BFD Authentication for OSPF Overview

Bidirectional Forwarding Detection (BFD) enables rapid detection of communication failures between adjacent systems. By default, authentication for BFD sessions is disabled. However, when you run BFD over Network Layer protocols, the risk of service attacks can be significant. We strongly recommend using authentication if you are running BFD over multiple hops or through insecure tunnels. Beginning with Junos OS Release 9.6, Junos OS supports authentication for BFD sessions running over OSPFv2. BFD authentication is not supported on MPLS OAM sessions. BFD authentication is only supported in the Canada and United States version of the Junos OS image and is not available in the export version.

You authenticate BFD sessions by specifying an authentication algorithm and keychain, and then associating that configuration information with a security authentication keychain using the keychain name.

The following sections describe the supported authentication algorithms, security keychains, and level of authentication that can be configured:

- [BFD Authentication Algorithms on page 3372](#)
- [Security Authentication Keychains on page 3372](#)
- [Strict Versus Loose Authentication on page 3373](#)



### **BFD Authentication Algorithms**

Junos OS supports the following algorithms for BFD authentication:

- **simple-password**—Plain-text password. One to 16 bytes of plain text are used to authenticate the BFD session. One or more passwords can be configured. This method is the least secure and should be used only when BFD sessions are not subject to packet interception.
- **keyed-md5**—Keyed Message Digest 5 hash algorithm for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed MD5 uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than or equal to the last sequence number received. Although more secure than a simple password, this method is vulnerable to replay attacks. Increasing the rate at which the sequence number is updated can reduce this risk.
- **meticulous-keyed-md5**—Meticulous keyed Message Digest 5 hash algorithm. This method works in the same manner as keyed MD5, but the sequence number is updated with every packet. Although more secure than keyed MD5 and simple passwords, this method might take additional time to authenticate the session.
- **keyed-sha-1**—Keyed Secure Hash Algorithm I for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed SHA uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. The key is not carried within the packets. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than the last sequence number received.
- **meticulous-keyed-sha-1**—Meticulous keyed Secure Hash Algorithm I. This method works in the same manner as keyed SHA, but the sequence number is updated with every packet. Although more secure than keyed SHA and simple passwords, this method might take additional time to authenticate the session.



**NOTE:** Nonstop active routing (NSR) is not supported with the meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

---

### **Security Authentication Keychains**

The security authentication keychain defines the authentication attributes used for authentication key updates. When the security authentication keychain is configured and associated with a protocol through the keychain name, authentication key updates can occur without interrupting routing and signaling protocols.

The authentication keychain contains one or more keychains. Each keychain contains one or more keys. Each key holds the secret data and the time at which the key becomes valid. The algorithm and keychain must be configured on both ends of the BFD session,



and they must match. Any mismatch in configuration prevents the BFD session from being created.

BFD allows multiple clients per session, and each client can have its own keychain and algorithm defined. To avoid confusion, we recommend specifying only one security authentication keychain.

### ***Strict Versus Loose Authentication***

By default, strict authentication is enabled and authentication is checked at both ends of each BFD session. Optionally, to smooth migration from nonauthenticated sessions to authenticated sessions, you can configure *loose checking*. When loose checking is configured, packets are accepted without authentication being checked at each end of the session. This feature is intended for transitional periods only.

### **Configuring BFD Authentication for OSPF**

Beginning with Junos OS Release 9.6, you can configure authentication for BFD sessions running over OSPFv2. Routing instances are also supported.

The following sections provide instructions for configuring and viewing BFD authentication on OSPF:

- [Configuring BFD Authentication Parameters on page 3373](#)
- [Viewing Authentication Information for BFD Sessions on page 3374](#)

### ***Configuring BFD Authentication Parameters***

Only three steps are needed to configure authentication on a BFD session:

1. Specify the BFD authentication algorithm for the OSPFv2 protocol.
2. Associate the authentication keychain with the OSPFv2 protocol.
3. Configure the related security authentication keychain.

To configure BFD authentication:

1. Specify the algorithm (**keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, **meticulous-keyed-sha-1**, or **simple-password**) to use for BFD authentication on an OSPF route or routing instance.

[edit]

```
user@host# set protocols ospf area 0.0.0.1 interface if2-ospf bfd-liveness-detection
authentication algorithm keyed-sha-1
```



**NOTE:** Nonstop active routing (NSR) is not supported with meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

2. Specify the keychain to be used to associate BFD sessions on the specified OSPF route or routing instance with the unique security authentication keychain attributes.



This keychain should match the keychain name configured at the **[edit security authentication key-chains]** hierarchy level.

```
[edit]
user@host# set protocols ospf area 0.0.0.1 interface if2-ospf bfd-liveness-detection
authentication keychain bfd-ospf
```



**NOTE:** The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.

3. Specify the unique security authentication information for BFD sessions:
  - The matching keychain name as specified in Step 2.
  - At least one key, a unique integer between 0 and 63. Creating multiple keys enables multiple clients to use the BFD session.
  - The secret data used to allow access to the session.
  - The time at which the authentication key becomes active, in the format *yyyy-mm-dd.hh:mm:ss*.

```
[edit security]
user@host# authentication-key-chains key-chain bfd-ospf key 53 secret
$9$ggaJDmPQ6/tJgF/AtREVsyPsnCtUHm start-time 2009-06-14.10:00:00
```

4. (Optional) Specify loose authentication checking if you are transitioning from nonauthenticated sessions to authenticated sessions.

```
[edit]
user@host> set protocols ospf interface if2-ospf bfd-liveness-detection authentication
loose-check
```

5. (Optional) View your configuration using the **show bfd session detail** or **show bfd session extensive** command.
6. Repeat the steps in this procedure to configure the other end of the BFD session.



**NOTE:** BFD authentication is only supported in the Canada and United States version of the Junos OS image and is not available in the export version.

### *Viewing Authentication Information for BFD Sessions*

You can view the existing BFD authentication configuration using the **show bfd session detail** and **show bfd session extensive** commands.

The following example shows BFD authentication configured for the **if2-ospf** BGP group. It specifies the keyed SHA-1 authentication algorithm and a keychain name of **bfd-ospf**. The authentication keychain is configured with two keys. Key 1 contains the secret data "**\$9\$ggaJDmPQ6/tJgF/AtREVsyPsnCtUHm**" and a start time of June 1, 2009, at 9:46:02 AM PST. Key 2 contains the secret data "**\$9\$a5jiKW9L.reP38ny.TszF2/9**" and a start time of June 1, 2009, at 3:29:20 PM PST.



```

[edit protocols ospf]
area 0.0.0.1 {
  interface if2-ospf {
    bfd-liveness-detection {
      authentication {
        algorithm keyed-sha-1;
        key-chain bfd-ospf;
      }
    }
  }
}
[edit security]
authentication key-chains {
  key-chain bfd-ospf {
    key 1 {
      secret "$9$ggaJDmPQ6/tJgF/AtREVsyPsnCtUHm";
      start-time "2009-6-1.09:46:02 -0700";
    }
    key 2 {
      secret "$9$a5jiKW9l.reP38ny.TszF2/9";
      start-time "2009-6-1.15:29:20 -0700";
    }
  }
}

```

If you commit these updates to your configuration, you see output similar to the following. In the output for the **show bfd session detail** command, **Authenticate** is displayed to indicate that BFD authentication is configured.

#### show bfd session detail

```
user@host# show bfd session detail
```

| Address   | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|-----------|-------|------------|-------------|-------------------|------------|
| 10.9.1.33 | Up    | so-7/1/0.0 | 0.600       | 0.200             | 3          |

Client OSPF, TX interval 0.200, RX interval 0.200, multiplier 3, **Authenticate**  
 Session up time 3d 00:34  
 Local diagnostic None, remote diagnostic None  
 Remote state Up, version 1  
 Replicated

1 sessions, 1 clients

Cumulative transmit rate 10.0 pps, cumulative receive rate 10.0 pps

For more information about the configuration, use the **show bfd session extensive** command. The output for this command provides the keychain name, the authentication algorithm and mode for each client in the session, and the overall BFD authentication configuration status, keychain name, and authentication algorithm and mode.



**show bfd session extensive**user@host# **show bfd session extensive**

| Address   | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|-----------|-------|------------|-------------|-------------------|------------|
| 10.9.1.33 | Up    | so-7/1/0.0 | 0.600       | 0.200             | 3          |

Client OSPF, TX interval 0.200, RX interval 0.200, multiplier 3, **Authenticate**  
**keychain bfd-ospf, algo keyed-md5, mode loose**

Session up time 3d 00:34  
 Local diagnostic None, remote diagnostic None  
 Remote state Up, version 1  
 Replicated  
 Min async interval 0.200, min slow interval 1.000  
 Adaptive async tx interval 0.200, rx interval 0.200  
 Local min tx interval 0.200, min rx interval 0.200, multiplier 3  
 Remote min tx interval 0.100, min rx interval 0.100, multiplier 3  
 Threshold transmission interval 0.000, Threshold for detection time 0.000  
 Local discriminator 11, remote discriminator 80  
 Echo mode disabled/inactive  
**Authentication enabled/active, keychain bfd-ospf, algo keyed-sha-1, mode strict**  
 1 sessions, 1 clients  
 Cumulative transmit rate 10.0 pps, cumulative receive rate 10.0 pps

- Related Documentation**
- [OSPF Configuration Overview](#)
  - [BFD for OSPF Overview on page 3365](#)

## OSPF Redundancy Features Configuration

- [Examples: Configuring Graceful Restart for OSPF on page 3376](#)

### Examples: Configuring Graceful Restart for OSPF

- [Graceful Restart for OSPF Overview on page 3376](#)
- [Example: Configuring Graceful Restart for OSPF on page 3378](#)
- [Example: Configuring the Helper Capability Mode for OSPFv2 Graceful Restart on page 3382](#)
- [Example: Configuring the Helper Capability Mode for OSPFv3 Graceful Restart on page 3386](#)
- [Example: Disabling Strict LSA Checking for OSPF Graceful Restart on page 3389](#)

#### Graceful Restart for OSPF Overview

Graceful restart allows a routing device undergoing a restart to inform its adjacent neighbors and peers of its condition. During a graceful restart, the restarting device and its neighbors continue forwarding packets without disrupting network performance. Because neighboring devices assist in the restart (these neighbors are called *helper routers*), the restarting device can quickly resume full operation without recalculating algorithms.





**NOTE:** On a broadcast link with a single neighbor, when the neighbor initiates an OSPFv3 graceful restart operation, the restart might be terminated at the point when the local routing device assumes the role of a helper. A change in the LSA is considered a topology change, which terminates the neighbor's restart operation.

Graceful restart is disabled by default. You can globally enable graceful restart for all routing protocols by including the **graceful-restart** statement at the [edit routing-options] hierarchy level. To enable graceful restart specifically for OSPF, first you need to globally enable graceful restart for all routing protocols.

This topic describes the following information:

- [Helper Mode for Graceful Restart on page 3377](#)
- [Planned and Unplanned Graceful Restart on page 3378](#)

#### ***Helper Mode for Graceful Restart***

When a device enabled for OSPF graceful restart restarts, it retains routes learned before the restart in its forwarding table. The device does not allow new OSPF link-state advertisements (LSAs) to update the routing table. This device continues to forward traffic to other OSPF neighbors (or helper routers), and sends only a limited number of LSAs during the restart period. To reestablish OSPF adjacencies with neighbors, the restarting device must send a grace LSA to all neighbors. In response, the helper routers enter helper mode (the ability to assist a neighboring device attempting a graceful restart) and send an acknowledgment back to the restarting device. If there are no topology changes, the helper routers continue to advertise LSAs as if the restarting device had remained in continuous OSPF operation.



**NOTE:** Helper mode is enabled by default when you start the routing platform, even if graceful restart is not enabled. You can disable helper mode specifically for OSPF.

When the restarting device receives replies from all the helper routers, the restarting device selects routes, updates the forwarding table, and discards the old routes. At this point, full OSPF adjacencies are reestablished and the restarting device receives and processes OSPF LSAs as usual. When the helper routers no longer receive grace LSAs from the restarting device or when the topology of the network changes, the helper routers also resume normal operation.

Beginning with Junos OS Release 11.4, you can configure restart signaling-based helper mode for OSPFv2 graceful restart configurations. The Junos OS implementation is based on RFC 4811, *OSPF Out-of-Band Link State Database (LSDB) Resynchronization*, RFC 4812, *OSPF Restart Signaling*, and RFC 4813, *OSPF Link-Local Signaling*. In restart signaling-based helper mode implementations, the restarting device informs its restart status to its neighbors only after the restart is complete. When the restart is complete, the restarting device sends hello messages to its helper routers with the restart signal (RS) bit set in



the hello packet header. When a helper router receives a hello packet with the RS bit set in the header, the helper router returns a hello message to the restarting device. The reply hello message from the helper router contains the ResyncState flag and the ResyncTimeout timer that enable the restarting device to keep track of the helper routers that are syncing up with it. When all helpers complete the synchronization, the restarting device exits the restart mode.



**NOTE:** Restart signaling-based graceful restart helper mode is not supported for OSPFv3 configurations.

---

### ***Planned and Unplanned Graceful Restart***

OSPF supports two types of graceful restart: planned and unplanned. During a planned restart, the restarting routing device informs the neighbors before restarting. The neighbors act as if the routing device is still within the network topology, and continue forwarding traffic to the restarting routing device. A grace period is set to specify when the neighbors should consider the restarting routing device as part of the topology. During an unplanned restart, the routing device restarts without warning.

### **Example: Configuring Graceful Restart for OSPF**

---

This example shows how to configure graceful restart specifically for OSPF.

- [Requirements on page 3378](#)
- [Overview on page 3378](#)
- [Configuration on page 3379](#)
- [Verification on page 3381](#)

#### ***Requirements***

Before you begin:

- Configure the router identifiers for the devices in your OSPF network. See “[Example: Configuring an OSPF Router Identifier](#)” on page 3294.
- Control OSPF designated router election. See “[Example: Controlling OSPF Designated Router Election](#)” on page 3296.
- Configure a single-area OSPF network. See “[Example: Configuring a Single-Area OSPF Network](#)” on page 3299.
- Configure a multiarea OSPF network. See “[Example: Configuring a Multiarea OSPF Network](#)” on page 3301.

#### ***Overview***

Graceful restart enables a routing device undergoing a restart to inform its adjacent neighbors and peers of its condition. During a graceful restart, the restarting routing device and its neighbors continue forwarding packets without disrupting network performance. By default, graceful restart is disabled. You can globally enable graceful restart for all routing protocols by including the **graceful-restart** statement at the **[edit routing-options]**



hierarchy level. To enable graceful restart specifically for OSPF, first you need to globally enable graceful restart for all routing protocols.

The first example shows how to enable graceful restart and configure the optional settings for the grace period interval. In this example, interfaces **fe-1/1/1** and **fe-1/1/2** are in OSPF area 0.0.0.0, and you configure those interfaces for graceful restart. The grace period interval for OSPF graceful restart is determined as equal to or less than the sum of the **notify-duration** time interval and the **restart-duration** time interval. The grace period is the number of seconds that the routing device's neighbors continue to advertise the routing device as fully adjacent, regardless of the connection state between the routing device and its neighbors.

The **notify-duration** statement configures how long (in seconds) the routing device notifies helper routers that it has completed graceful restart by sending purged grace link-state advertisements (LSAs) over all interfaces. By default, the routing device sends grace LSAs for 30 seconds. The range is from 1 through 3600 seconds.

The **restart-duration** statement configures the amount of time the routing device waits (in seconds) to complete reacquisition of OSPF neighbors from each area. By default, the routing device allows 180 seconds. The range is from 1 through 3600 seconds.

The second example shows how to disable graceful restart for OSPF by including the **disable** statement.

### Configuration

- [Enabling Graceful Restart for OSPF on page 3379](#)
- [Disabling Graceful Restart for OSPF on page 3381](#)

### Enabling Graceful Restart for OSPF

#### CLI Quick Configuration

To quickly enable graceful restart for OSPF, copy the following commands and paste them into the CLI.

```
[edit]
set interfaces fe-1/1/1 unit 0 family inet address 10.0.0.4
set interfaces fe-1/1/2 unit 0 family inet address 10.0.0.5
set protocols ospf area 0.0.0.0 interface fe-1/1/1
set protocols ospf area 0.0.0.0 interface fe-1/1/2
set routing-options graceful-restart
set protocols ospf graceful-restart restart-duration 190
set protocols ospf graceful-restart notify-duration 40
```

#### Step-by-Step Procedure

To enable graceful restart for OSPF:

1. Configure the interfaces.



**NOTE:** For OSPFv3, use IPv6 addresses.

```
[edit]
user@host# set interfaces fe-1/1/1 unit 0 family inet address 10.0.0.4
user@host# set interfaces fe-1/1/1 unit 0 family inet address 10.0.0.5
```



2. Configure OSPF on the interfaces.



**NOTE:** To specify OSPFv3, include the `ospf3` statement at the `[edit protocols]` hierarchy level.

```
[edit]
user@host# set protocols ospf area 0.0.0.0 interface fe-1/1/1
user@host# set protocols ospf area 0.0.0.0 interface fe-1/1/2
```

3. Configure graceful restart globally

```
[edit]
user@host#edit routing-options graceful-restart
```

4. Configure OSPF graceful restart.

```
[edit]
user@host# edit protocols ospf graceful-restart
```

5. (Optional) Configure the restart duration time.

```
[edit protocols ospf graceful-restart]
user@host# set restart-duration 190
```

6. (Optional) Configure the notify duration time.

```
[edit protocols ospf graceful-restart]
user@host# set notify-duration 40
```

7. If you are done configuring the device, commit the configuration.

```
[edit protocols ospf graceful-restart]
user@host# commit
```

**Results** Confirm your configuration by entering the `show interfaces` and `show protocols ospf` commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show interfaces
fe-1/1/1 {
  unit 0 {
    family inet {
      address 10.0.0.4/32;
    }
  }
}
fe-1/1/2 {
  unit 0 {
    family inet {
      address 10.0.0.5/32;
    }
  }
}
user@host# show protocols ospf
graceful-restart {
  restart-duration 190;
```



```

        notify-duration 40;
    }
    area 0.0.0.0 {
        interface fe-1/1/1.0;
        interface fe-1/1/2.0;
    }

```

To confirm an OSPFv3 configuration, enter the **show interfaces** and the **show protocols ospf3** commands.

### *Disabling Graceful Restart for OSPF*

**CLI Quick Configuration** To quickly disable graceful restart for OSPF, copy the following command and paste it into the CLI.

```

[edit]
user@host# set protocols ospf graceful-restart disable

```

**Step-by-Step Procedure** To disable graceful restart for OSPF:

1. Disable graceful restart for the OSPF protocol only.

This command does not affect the global graceful restart configuration setting.



**NOTE:** To specify OSPFv3, include the **ospf3** statement at the **[edit protocols]** hierarchy level.

```

[edit]
user@host# set protocols ospf graceful-restart disable

```

2. If you are done configuring the device, commit the configuration.

```

[edit]
user@host# commit

```

**Results** Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@host# show protocols ospf
graceful-restart disable;

```

To confirm an OSPFv3 configuration, enter the **show protocols ospf3** command.

### *Verification*

Confirm that the configuration is working properly.

- [Verifying the OSPF Graceful Restart Configuration on page 3382](#)
- [Verifying Graceful Restart Status on page 3382](#)



### ***Verifying the OSPF Graceful Restart Configuration***

- Purpose** Verify information about your OSPF graceful restart configuration.
- Action** From operational mode, enter the **show ospf overview** command for OSPFv2. Enter the **show ospf3 overview** command for OSPFv3.
- Meaning** The Restart field displays the status of graceful restart as either enabled or disabled. The Restart duration field displays how much time the restarted routing device requires to complete reacquisition of OSPF neighbors. The Restart grace period field displays how much time the neighbors should consider the restarted routing device as part of the topology.

### ***Verifying Graceful Restart Status***

- Purpose** Verify the status of graceful restart.
- Action** From operational mode, enter the **show route instance detail** command.
- Meaning** The Restart State field displays Pending if the restart has not been completed or Complete if the restart has finished. The Path selection timeout field indicates the amount of time remaining until graceful restart is declared complete. There is a more detailed Restart State field that displays a list of protocols that have or have not yet completed graceful restart for the specified routing table.

### **Example: Configuring the Helper Capability Mode for OSPFv2 Graceful Restart**

This example shows how to disable and reenable the helper mode capability for OSPFv2 graceful restart.

- [Requirements on page 3382](#)
- [Overview on page 3383](#)
- [Configuration on page 3383](#)
- [Verification on page 3385](#)

#### ***Requirements***

Before you begin:

- Configure the router identifiers for the devices in your OSPF network. See [“Example: Configuring an OSPF Router Identifier” on page 3294](#).
- Control OSPF designated router election. See [“Example: Controlling OSPF Designated Router Election” on page 3296](#)
- Configure a single-area OSPF network. See [“Example: Configuring a Single-Area OSPF Network” on page 3299](#).
- Configure a multiarea OSPF network. See [“Example: Configuring a Multiarea OSPF Network” on page 3301](#).



### Overview

The OSPF graceful restart helper capability assists a neighboring routing device attempting a graceful restart. By default, the helper capability is globally enabled when you start the routing platform. This means that the helper capability is enabled when you start OSPF, even if graceful restart is not globally enabled or specifically enabled for OSPF. You can further modify your graceful restart configuration to disable the helper capability.

Beginning with Junos OS Release 11.4, you can configure restart signaling-based helper mode for OSPFv2 graceful restart configurations. Both the standard and restart signaling-based helper modes are enabled by default.

In the first example, interfaces **fe-1/1/1** and **fe-1/1/2** are in OSPFv2 area 0.0.0.0, and you configure those interfaces for graceful restart. You then disable the standard OSPFv2 graceful restart helper capability by including the **helper-disable standard** statement. This configuration is useful if you have an environment that contains other vendor equipment that is configured for restart signaling-based graceful restart.



**NOTE:** The **helper-disable** statement and the **no-strict-lsa-checking** statement cannot be configured at the same time. If you attempt to configure both statements at the same time, the routing device displays a warning message when you enter the **show protocols ospf** command.

The second example shows how to reenable the standard OSPFv2 restart helper capability that you disabled in the first example.

### Configuration

- [Disabling Helper Mode for OSPFv2 on page 3383](#)
- [Reenabling Helper Mode for OSPFv2 on page 3384](#)

#### Disabling Helper Mode for OSPFv2

#### CLI Quick Configuration

To quickly enable graceful restart for OSPFv2 with helper mode disabled, copy the following commands and paste them into the CLI.

```
[edit]
set interfaces fe-1/1/1 unit 0 family inet address 10.0.0.4
set interfaces fe-1/1/2 unit 0 family inet address 10.0.0.5
set protocols ospf area 0.0.0.0 interface fe-1/1/1
set protocols ospf area 0.0.0.0 interface fe-1/1/2
set protocols ospf graceful-restart helper-disable standard
```

#### Step-by-Step Procedure

To enable graceful restart for OSPFv2 with helper mode disabled:

1. Configure the interfaces.

```
[edit]
user@host# set interfaces fe-1/1/1 unit 0 family inet address 10.0.0.4
user@host# set interfaces fe-1/1/2 unit 0 family inet address 10.0.0.5
```

2. Configure OSPFv2 on the interfaces



```
[edit]
user@host# set protocols ospf area 0.0.0.0 interface fe-1/1/1
user@host# set protocols ospf area 0.0.0.0 interface fe-1/1/2
```

3. Disable the OSPFv2 graceful restart helper capability.  
If you disable the OSPFv2 graceful restart helper capability, you cannot disable strict LSA checking.

```
[edit]
user@host# set protocols ospf graceful-restart helper-disable standard
```

4. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

**Results** Confirm your configuration by entering the **show interfaces** and the **show protocols ospf** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show interfaces
fe-1/1/1 {
  unit 0 {
    family inet {
      address 10.0.0.4/32;
    }
  }
}
fe-1/1/2 {
  unit 0 {
    family inet {
      address 10.0.0.5/32;
    }
  }
}
user@host# show protocols ospf
graceful-restart {
  helper-disable {
    standard;
  }
}
area 0.0.0.0 {
  interface fe-1/1/1.0;
  interface fe-1/1/2.0;
}
```

#### *Reenabling Helper Mode for OSPFv2*

**CLI Quick Configuration** To quickly reenable standard helper-mode for OSPFv2, copy the following command and paste it into the CLI.

```
[edit]
delete protocols ospf graceful-restart helper-disable standard
```





**NOTE:** To reenable restart signaling-based helper mode, include the **restart-signaling** statement. To reenable both standard and restart signaling-based helper mode, include the **both** statement.

### Step-by-Step Procedure

To reenable standard helper mode for OSPFv2:

1. Delete the standard helper-mode statement from the OSPFv2 configuration.

[edit]

user@host# **delete protocols ospf graceful-restart helper-disable standard**

2. If you are done configuring the device, commit the configuration.

[edit]

user@host# **commit**

**Results** After you reenable standard helper mode, the **show protocols ospf** command no longer displays the graceful restart configuration.

### Verification

Confirm that the configuration is working properly.

- [Verifying the OSPFv2 Graceful Restart Configuration on page 3385](#)
- [Verifying Graceful Restart Status on page 3385](#)

### Verifying the OSPFv2 Graceful Restart Configuration

**Purpose** Verify information about your OSPFv2 graceful restart configuration. The Restart field displays the status of graceful restart as either enabled or disabled, the Graceful restart helper mode field displays the status of the standard helper mode capability as enabled or disabled, and the Restart-signaling helper mode field displays the status of the restart signaling-based helper mode as enabled or disabled. By default, both standard and restart signaling-based helper modes are enabled.

**Action** From operational mode, enter the **show ospf overview** command.

### Verifying Graceful Restart Status

**Purpose** Verify the status of graceful restart. The Restart State field displays Pending if the restart has not completed, or Complete if the restart has finished. The Path selection timeout field indicates the amount of time remaining until graceful restart is declared complete. There is a more detailed Restart State field that displays a list of protocols that have completed graceful restart or have not yet completed graceful restart for the specified routing table.

**Action** From operational mode, enter the **show route instance detail** command.



### Example: Configuring the Helper Capability Mode for OSPFv3 Graceful Restart

This example shows how to disable and reenable the helper mode capability for OSPFv3 graceful restart.

- [Requirements on page 3386](#)
- [Overview on page 3386](#)
- [Configuration on page 3386](#)
- [Verification on page 3388](#)

#### **Requirements**

Before you begin:

- Configure the router identifiers for the devices in your OSPF network. See [“Example: Configuring an OSPF Router Identifier” on page 3294](#).
- Control OSPF designated router election. See [“Example: Controlling OSPF Designated Router Election” on page 3296](#)
- Configure a single-area OSPF network. See [“Example: Configuring a Single-Area OSPF Network” on page 3299](#).
- Configure a multiarea OSPF network. See [“Example: Configuring a Multiarea OSPF Network” on page 3301](#).

#### **Overview**

The OSPF graceful restart helper capability assists a neighboring routing device attempting a graceful restart. By default, the helper capability is globally enabled when you start the routing platform. This means that the helper capability is enabled when you start OSPF, even if graceful restart is not globally enabled or specifically enabled for OSPF. You can further modify your graceful restart configuration to disable the helper capability.

In the first example, interfaces **fe-1/1/1** and **fe-1/1/2** are in OSPFv3 area 0.0.0.0, and you configure those interfaces for graceful restart. You then disable the OSPFv3 graceful restart helper capability by including the **helper-disable** statement.



**NOTE:** The **helper-disable** statement and the **no-strict-lsa-checking** statement cannot be configured at the same time. If you attempt to configure both statements at the same time, the routing device displays a warning message when you enter the **show protocols ospf** command.

---

The second example shows how to reenable the OSPFv3 restart helper capability that you disabled in the first example.

#### **Configuration**

- [Disabling Helper Mode for OSPFv3 on page 3387](#)
- [Reenabling Helper Mode for OSPFv3 on page 3388](#)



*Disabling Helper Mode for OSPFv3*

**CLI Quick Configuration** To quickly enable graceful restart for OSPFv3 with helper mode disabled, copy the following commands and paste them into the CLI.

```
[edit]
set interfaces fe-1/1/1 unit 0 family inet6 address 2002:0a00:0004::
set interfaces fe-1/1/2 unit 0 family inet6 address 2002:0a00:0005::
set protocols ospf3 area 0.0.0.0 interface fe-1/1/1
set protocols ospf3 area 0.0.0.0 interface fe-1/1/2
set protocols ospf3 graceful-restart helper-disable
```

**Step-by-Step Procedure** To enable graceful restart for OSPFv3 with helper mode disabled:

1. Configure the interfaces.

```
[edit]
user@host# set interfaces fe-1/1/1 unit 0 family inet6 address 2002:0a00:0004::
user@host# set interfaces fe-1/1/1 unit 0 family inet address 2002:0a00:0005::
```

2. Configure OSPFv3 on the interfaces

```
[edit]
user@host# set protocols ospf3 area 0.0.0.0 interface fe-1/1/1
user@host# set protocols ospf3 area 0.0.0.0 interface fe-1/1/2
```

3. Disable the OSPFv3 graceful restart helper capability.  
If you disable the OSPFv3 graceful restart helper capability, you cannot disable strict LSA checking.

```
[edit]
user@host# set protocols ospf3 graceful-restart helper-disable
```

4. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

**Results** Confirm your configuration by entering the **show interfaces** and the **show protocols ospf3** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show interfaces
fe-1/1/1 {
  unit 0 {
    family inet6 {
      address 2002:0a00:0004::/128;
    }
  }
}
fe-1/1/2 {
  unit 0 {
    family inet6 {
      address 2002:0a00:0005::/128;
    }
  }
}
```



```
user@host# show protocols ospf3
graceful-restart {
  helper-disable;
}
area 0.0.0.0 {
  interface fe-1/1/1.0;
  interface fe-1/1/2.0;
}
```

#### *Reenabling Helper Mode for OSPFv3*

**CLI Quick Configuration** To quickly reenable helper-mode for OSPFv3, copy the following command and paste it into the CLI.

```
[edit]
delete protocols ospf3 graceful-restart helper-disable
```

**Step-by-Step Procedure** To reenable helper mode for OSPFv3:

1. Delete the standard helper-mode statement from the OSPFv3 configuration.

```
[edit]
user@host# delete protocols ospf3 graceful-restart helper-disable
```

2. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

**Results** After you reenable standard helper mode, the **show protocols ospfs** command no longer displays the graceful restart configuration.

#### *Verification*

Confirm that the configuration is working properly.

- [Verifying the OSPFv3 Graceful Restart Configuration on page 3388](#)
- [Verifying Graceful Restart Status on page 3388](#)

#### *Verifying the OSPFv3 Graceful Restart Configuration*

**Purpose** Verify information about your OSPFv3 graceful restart configuration. The Restart field displays the status of graceful restart as either enabled or disabled, and the Helper mode field displays the status of the helper mode capability as either enabled or disabled.

**Action** From operational mode, enter the **show ospf3 overview** command.

#### *Verifying Graceful Restart Status*

**Purpose** Verify the status of graceful restart. The Restart State field displays Pending if the restart has not completed, or Complete if the restart has finished. The Path selection timeout field indicates the amount of time remaining until graceful restart is declared complete. There is a more detailed Restart State field that displays a list of protocols that have



completed graceful restart or have not yet completed graceful restart for the specified routing table.

**Action** From operational mode, enter the **show route instance detail** command.

### Example: Disabling Strict LSA Checking for OSPF Graceful Restart

This example shows how to disable strict link-state advertisement (LSA) checking for OSPF graceful restart.

- [Requirements on page 3389](#)
- [Overview on page 3389](#)
- [Configuration on page 3389](#)
- [Verification on page 3391](#)

#### Requirements

Before you begin:

- Configure the router identifiers for the devices in your OSPF network. See [“Example: Configuring an OSPF Router Identifier” on page 3294](#).
- Control OSPF designated router election. See [“Example: Controlling OSPF Designated Router Election” on page 3296](#)
- Configure a single-area OSPF network. See [“Example: Configuring a Single-Area OSPF Network” on page 3299](#).
- Configure a multiarea OSPF network. See [“Example: Configuring a Multiarea OSPF Network” on page 3301](#).

#### Overview

You can disable strict LSA checking to prevent the termination of graceful restart by a helping router. You might configure this option for interoperability with other vendor devices. The OSPF graceful restart helper capability must be enabled if you disable strict LSA checking. By default, LSA checking is enabled.

In this example, interfaces **fe-1/1/1** and **fe-1/1/2** are in OSPF area 0.0.0.0, and you configure those interfaces for graceful restart. You then disable strict LSA checking by including the **no-strict-lsa-checking** statement.



**NOTE:** The **helper-disable** statement and the **no-strict-lsa-checking** statement cannot be configured at the same time. If you attempt to configure both statements at the same time, the routing device displays a warning message when you enter the **show protocols ospf** command.

#### Configuration

**CLI Quick Configuration** To quickly enable graceful restart for OSPF with strict LSA checking disabled, copy the following commands and paste them into the CLI.



```
[edit]
set interfaces fe-1/1/1 unit 0 family inet address 10.0.0.4
set interfaces fe-1/1/2 unit 0 family inet address 10.0.0.5
set protocols ospf area 0.0.0.0 interface fe-1/1/1
set protocols ospf area 0.0.0.0 interface fe-1/1/2
set protocols ospf graceful-restart no-strict-lsa-checking
```

**Step-by-Step Procedure** To enable graceful restart for OSPF with strict LSA checking disabled:

1. Configure the interfaces.



**NOTE:** For OSPFv3, use IPv6 addresses.

```
[edit]
user@host# set interfaces fe-1/1/1 unit 0 family inet address 10.0.0.4
user@host# set interfaces fe-1/1/2 unit 0 family inet address 10.0.0.5
```

2. Configure OSPF on the interfaces



**NOTE:** To specify OSPFv3, include the `ospf3` statement at the `[edit protocols]` hierarchy level.

```
[edit]
user@host# set protocols ospf area 0.0.0.0 interface fe-1/1/1
user@host# set protocols ospf area 0.0.0.0 interface fe-1/1/2
```

3. Disable strict LSA checking.  
If you disable the strict LSA checking, OSPF graceful restart helper capability must be enabled (which is the default behavior).

```
[edit]
user@host# set protocols ospf graceful-restart no-strict-lsa-checking
```

4. If you are done configuring the device, commit the configuration.

```
[edit ]
user@host# commit
```

**Results** Confirm your configuration by entering the **show interfaces** and the **show protocols ospf** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show interfaces
fe-1/1/1 {
  unit 0 {
    family inet {
      address 10.0.0.4/32;
    }
  }
}
fe-1/1/2 {
```



```

    unit 0 {
      family inet {
        address 10.0.0.5/32;
      }
    }
  }
}
user@host# show protocols ospf
graceful-restart {
  no-strict-lsa-checking;
}
area 0.0.0.0 {
  interface fe-1/1/1.0;
  interface fe-1/1/2.0;
}

```

To confirm your OSPFv3 configuration, enter the **show interfaces** and the **show protocols ospf3** commands.

### Verification

Confirm that the configuration is working properly.

- [Verifying the OSPF Graceful Restart Configuration on page 3391](#)
- [Verifying Graceful Restart Status on page 3391](#)

### Verifying the OSPF Graceful Restart Configuration

**Purpose** Verify information about your OSPF graceful restart configuration. The Restart field displays the status of graceful restart as either enabled or disabled.

**Action** From operational mode, enter the **show ospf overview** command for OSPFv2, and enter the **show ospf3 overview** command for OSPFv3.

### Verifying Graceful Restart Status

**Purpose** Verify the status of graceful restart. The Restart State field displays Pending if the restart has not completed, or Complete if the restart has finished. The Path selection timeout field indicates the amount of time remaining until graceful restart is declared complete. There is a more detailed Restart State field that displays a list of protocols that have completed graceful restart or have not yet completed graceful restart for the specified routing table.

**Action** From operational mode, enter the **show route instance detail** command.

**Related Documentation**

- [OSPF Overview on page 3282](#)
- [OSPF Configuration Overview](#)
- [Graceful Restart Concepts on page 1769](#) in the Junos OS High Availability Configuration Guide



## OSPF Traffic Engineering Configuration

---

- [Examples: Configuring OSPF Traffic Engineering on page 3392](#)
- [Example: Configuring OSPF Passive Traffic Engineering Mode on page 3400](#)

### Examples: Configuring OSPF Traffic Engineering

- [OSPF Support for Traffic Engineering on page 3392](#)
- [Example: Enabling OSPF Traffic Engineering Support on page 3394](#)
- [Example: Configuring the Traffic Engineering Metric for a Specific OSPF Interface on page 3398](#)

### OSPF Support for Traffic Engineering

---

Traffic engineering allows you to control the path that data packets follow, bypassing the standard routing model, which uses routing tables. Traffic engineering moves flows from congested links to alternate links that would not be selected by the automatically computed destination-based shortest path.

To help provide traffic engineering and MPLS with information about network topology and loading, extensions have been added to the Junos OS implementation of OSPF. When traffic engineering is enabled on the routing device, you can enable OSPF traffic engineering support. When you enable traffic engineering for OSPF, the shortest-path-first (SPF) algorithm takes into account the various label-switched paths (LSPs) configured under MPLS and configures OSPF to generate opaque link-state advertisements (LSAs) that carry traffic engineering parameters. The parameters are used to populate the traffic engineering database. The traffic engineering database is used exclusively for calculating explicit paths for the placement of LSPs across the physical topology. The Constrained Shortest Path First (CSPF) algorithm uses the traffic engineering database to compute the paths that MPLS LSPs take. RSVP uses this path information to set up LSPs and to reserve bandwidth for them.

By default, traffic engineering support is disabled. To enable traffic engineering, include the **traffic-engineering** statement. You can also configure the following OSPF traffic engineering extensions:

- **advertise-unnumbered-interfaces**—(OSPFv2 only) Advertises the link-local identifier in the link-local traffic engineering LSA packet. This statement must be included on both ends of an unnumbered link to allow an ingress LER to update the link in its traffic engineering database and use it for CSPF calculations. The link-local identifier is then used by RSVP to signal unnumbered interfaces as defined in RFC 3477, *Signalling Unnumbered Links in Resource Reservation Protocol - Traffic Engineering (RSVP-TE)*.
- **credibility-protocol-preference**—(OSPFv2 only) Assigns a credibility value to OSPF routes in the traffic engineering database. By default, Junos OS prefers IS-IS routes in the traffic engineering database over other interior gateway protocol (IGP) routes even if the routes of another IGP are configured with a lower, that is, more preferred, preference value. The traffic engineering database assigns a credibility value to each IGP and prefers the routes of the IGP with the highest credibility value. In Junos OS Release 9.4 and later, you can configure OSPF to take protocol preference into account



to determine the traffic engineering database credibility value. When protocol preference is used to determine the credibility value, IS-IS routes are not automatically preferred by the traffic engineering database, depending on your configuration.

- **ignore-lsp-metrics**—Ignores RSVP LSP metrics in OSPF traffic engineering shortcut calculations or when you configure LDP over RSVP LSPs. This option avoids mutual dependency between OSPF and RSVP, eliminating the time period when the RSVP metric used for tunneling traffic is not up to date. In addition, If you are using RSVP for traffic engineering, you can run LDP simultaneously to eliminate the distribution of external routes in the core. The LSPs established by LDP are tunneled through the LSPs established by RSVP. LDP effectively treats the traffic-engineered LSPs as single hops.
- **multicast-rpf-routes**—(OSPFv2 only) Installs unicast IPv4 routes (not LSPs) in the multicast routing table (**inet.2**) for multicast reverse-path forwarding (RPF) checks. The **inet.2** routing table consists of unicast routes used for multicast RPF lookup. RPF is an antispoofing mechanism used to check if the packet is coming in on an interface that is also sending data back to the packet source.
- **no-topology**—(OSPFv2 only) To disable the dissemination of link-state topology information. If disabled, traffic engineering topology information is no longer distributed within the OSPF area.
- **shortcuts**—Configures OSPF to use MPLS LSPs as shortcut next hops. By default, shortcut routes calculated through OSPFv2 are installed in the **inet.3** routing table, and shortcut routes calculated through OSPFv3 are installed in the **inet6.3** routing table.



**NOTE:** Whenever possible, use OSPF IGP shortcuts configured at the [edit protocols mpls traffic-engineering bgp-igp] hierarchy level instead of traffic engineering shortcuts configured at the [edit protocols (ospf | ospf3) traffic-engineering shortcuts] hierarchy level.

If you configure OSPF IGP shortcuts, **inet.3** routes are moved into the **inet.0** routing table. In addition, you can verify the data path using **ping** or **traceroute** commands since the ping and traceroute packets get tunneled into the LSP. In case of a VPN enabled device, we recommend using [edit protocols mpls traffic-engineering bgp-igp-both-ribs] because BGP next-hop resolution for VPN prefixes relies on entries in the **inet.3** table.

If you configure traffic engineering shortcuts, OSPF treats the MPLS LSP as a candidate next hop and installs the routes in the **inet.3** (for OSPFv2) and **inet6.3** (for OSPFv3) routing tables. The only use for these tables is to allow BGP to perform next-hop resolution. In addition, you cannot verify the data path of these routes using **ping** or **traceroute** commands because the ping and traceroute packets get tunneled into the LSP.

- **lsp-metric-info-summary**—Advertises the LSP metric in summary LSAs to treat the LSP as a link. This configuration allows other routing devices in the network to use this LSP. To accomplish this, you need to configure MPLS and OSPF traffic engineering to advertise the LSP metric in summary LSAs.



When you enable traffic engineering on the routing device, you can also configure an OSPF metric that is used exclusively for traffic engineering. The traffic engineering metric is used for information injected into the traffic engineering database. Its value does not affect normal OSPF forwarding.

### **Example: Enabling OSPF Traffic Engineering Support**

---

This example shows how to enable OSPF traffic engineering support to advertise the label-switched path (LSP) metric in summary link-state advertisements (LSAs).

- [Requirements on page 3394](#)
- [Overview on page 3394](#)
- [Configuration on page 3395](#)
- [Verification on page 3398](#)

#### **Requirements**

Before you begin:

- Configure the device interfaces. See the Junos® OS Network Interfaces.
- Configure BGP per your network requirements. See the Junos OS Routing Protocols Configuration Guide
- Configure MPLS per your network requirements. See the Junos OS MPLS Applications Configuration Guide.

#### **Overview**

You can configure OSPF to treat an LSP as a link and have other routing devices in the network use this LSP. To accomplish this, you configure MPLS and OSPF traffic engineering to advertise the LSP metric in summary LSAs.

In this example, there are four routing devices in area 0.0.0.0, and you want OSPF to treat the LSP named R1-to-R4 that goes from the ingress Device R1 to the egress Device R4 as a link.

For OSPF, you enable traffic engineering on all four routing devices in the area by including the **traffic-engineering** statement. This configuration ensures that the shortest-path-first (SPF) algorithm takes into account the LSPs configured under MPLS and configures OSPF to generate LSAs that carry traffic engineering parameters. You further ensure that OSPF uses the MPLS LSP as the next hop and advertises the LSP metric in summary LSAs, by including the optional **shortcuts lsp-metric-into-summary** statement on the ingress Device R1.

For MPLS, you enable traffic engineering so that MPLS performs traffic engineering on both BGP and IGP destinations by including the **traffic-engineering bgp-igp** statement, and you include the LSP named R1-to-R4 by including the **label-switched-path lsp-path-name to address** statement on the ingress Device R1. The address specified in the **to** statement on the ingress Device R1 must match the router ID of the egress Device R4 for the LSP to function as a direct link to the egress routing device and to be used as input to the OSPF SPF calculations. In this example, the router ID of the egress Device R4 is 10.0.0.4.



**Configuration**

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Modifying the Junos OS Configuration in CLI User Guide*.

**CLI Quick Configuration** To quickly enable OSPF traffic engineering support to advertise the LSP metric in summary LSAs, copy the following commands and paste them into the CLI.

Configuration on R1:

```
[edit]
set routing-options router-id 10.0.0.1
set protocols ospf area 0.0.0.0 interface all
set protocols ospf area 0.0.0.0 interface fxp0.0 disable
set protocols ospf traffic-engineering shortcuts lsp-metric-into-summary
set protocols mpls traffic-engineering bgp-igp
set protocols mpls label-switched-path R1-to-R4 to 10.0.0.4
```

Configuration on R2:

```
[edit]
set routing-options router-id 10.0.0.2
set protocols ospf area 0.0.0.0 interface all
set protocols ospf area 0.0.0.0 interface fxp0.0 disable
set protocols ospf traffic-engineering
```

Configuration on R3:

```
[edit]
set routing-options router-id 10.0.0.3
set protocols ospf area 0.0.0.0 interface all
set protocols ospf area 0.0.0.0 interface fxp0.0 disable
set protocols ospf traffic-engineering
```

Configuration on R4:

```
[edit]
set routing-options router-id 10.0.0.4
set protocols ospf area 0.0.0.0 interface all
set protocols ospf area 0.0.0.0 interface fxp0.0 disable
set protocols ospf traffic-engineering
```

**Step-by-Step Procedure** To enable OSPF traffic engineering support to advertise LSP metrics in summary LSAs:

1. Configure the router ID.

```
[edit]
user@R1# set routing-options router-id 10.0.0.1
```

```
[edit]
user@R2# set routing-options router-id 10.0.0.2
```

```
[edit]
user@R3# set routing-options router-id 10.0.0.3
```

```
[edit]
user@R4# set routing-options router-id 10.0.0.4
```



2. Configure the OSPF area and add the interfaces.



**NOTE:** To specify OSPFv3, include the `ospf3` statement at the `[edit protocols]` hierarchy level.

```
[edit]
user@R1# set protocols ospf area 0.0.0.0 interface all
user@R1# set protocols ospf area 0.0.0.0 interface fxp0.0 disable
```

```
[edit]
user@R2# set protocols ospf area 0.0.0.0 interface all
user@R2# set protocols ospf area 0.0.0.0 interface fxp0.0 disable
```

```
[edit]
user@R3# set protocols ospf area 0.0.0.0 interface all
user@R3# set protocols ospf area 0.0.0.0 interface fxp0.0 disable
```

```
[edit]
user@R4# set protocols ospf area 0.0.0.0 interface all
user@R4# set protocols ospf area 0.0.0.0 interface fxp0.0 disable
```

3. Enable OSPF traffic engineering.

```
[edit]
user@R1 set protocols ospf traffic-engineering shortcuts lsp-metric-into-summary
```

```
[edit]
user@R2 set protocols ospf traffic-engineering
```

```
[edit]
user@R3 set protocols ospf traffic-engineering
```

```
[edit]
user@R4 set protocols ospf traffic-engineering
```

4. On Device R1, configure MPLS traffic engineering.

```
[edit ]
user@R1 set protocol mpls traffic-engineering bgp-igp
user@R1 set protocols mpls label-switched-path R1-to-R4 to 10.0.0.4
```

5. If you are done configuring the devices, commit the configuration.

```
[edit]
user@host# commit
```

**Results** Confirm your configuration by entering the **show routing-options**, **show protocols ospf**, and **show protocols mpls** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Output for R1:

```
user@host# show routing-options
router-id 10.0.0.1;

user@host# show protocols ospf
traffic-engineering {
  shortcuts lsp-metric-into-summary;
```



```
}
area 0.0.0.0 {
  interface all;
  interface fxp0.0 {
    disable;
  }
}

user@host# show protocols mpls
traffic-engineering bgp-igp;
label-switched-path R1-to-R4 {
  to 10.0.0.4;
}
```

Output for R2:

```
user@host# show routing-options
router-id 10.0.0.2;

user@host# show protocols ospf
traffic-engineering;
area 0.0.0.0 {
  interface all;
  interface fxp0.0 {
    disable;
  }
}
```

Output for R3:

```
user@host# show routing-options
router-id 10.0.0.3;

user@host# show protocols ospf
traffic-engineering;
area 0.0.0.0 {
  interface all;
  interface fxp0.0 {
    disable;
  }
}
```

Output for R4:

```
user@host# show routing-options
router-id 10.0.0.4;

user@host# show protocols ospf
traffic-engineering;
area 0.0.0.0 {
  interface all;
  interface fxp0.0 {
    disable;
  }
}
```

To confirm your OSPFv3 configuration, enter the **show routing-options**, **show protocols ospf3**, and **show protocols mpls** commands.



**Verification**

Confirm that the configuration is working properly.

- [Verifying the Traffic Engineering Capability for OSPF on page 3398](#)
- [Verifying OSPF Entries in the Traffic Engineering Database on page 3398](#)
- [Verifying That the Traffic Engineering Database Is Learning Node Information from OSPF on page 3398](#)

**Verifying the Traffic Engineering Capability for OSPF**

**Purpose** Verify that traffic engineering has been enabled for OSPF. By default, traffic engineering is disabled.

**Action** From operational mode, enter the **show ospf overview** command for OSPFv2, and enter the **show ospf3 overview** for OSPFv3.

**Verifying OSPF Entries in the Traffic Engineering Database**

**Purpose** Verify the OSPF information in the traffic engineering database. The Protocol field displays OSPF and the area from which the information was learned.

**Action** From operational mode, enter the **show ted database** command.

**Verifying That the Traffic Engineering Database Is Learning Node Information from OSPF**

**Purpose** Verify that OSPF is reporting node information. The Protocol name field displays OSPF and the area from which the information was learned.

**Action** From operational mode, enter the **show ted protocol** command.

**Example: Configuring the Traffic Engineering Metric for a Specific OSPF Interface**

This example shows how to configure the OSPF metric value used for traffic engineering.

- [Requirements on page 3398](#)
- [Overview on page 3399](#)
- [Configuration on page 3399](#)
- [Verification on page 3400](#)

**Requirements**

Before you begin:

- Configure the device interfaces. See the Junos® OS Network Interfaces.
- Configure OSPF for traffic engineering. See [“Example: Enabling OSPF Traffic Engineering Support” on page 3394](#)



### Overview

You can configure an OSPF metric that is used exclusively for traffic engineering. To modify the default value of the traffic engineering metric, include the **te-metric** statement. The OSPF traffic engineering metric does not affect normal OSPF forwarding. By default, the traffic engineering metric is the same value as the OSPF metric. The range is 1 through 65,535.

In this example, you configure the OSPF traffic engineering metric on OSPF interface **fe-0/1/1** in area 0.0.0.0.

### Configuration

**CLI Quick Configuration** To quickly configure the OSPF traffic engineering metric for a specific interface, copy the following command and paste it into the CLI.

```
[edit]
set protocols ospf area 0.0.0.0 interface fe-0/1/1 te-metric 10
```

**Step-by-Step Procedure** To configure an OSPF traffic engineering metric for a specific interface used only for traffic engineering:

1. Create an OSPF area.



**NOTE:** To specify OSPFv3, include the **ospf3** statement at the **[edit protocols]** hierarchy level.

```
[edit]
user@host# edit protocols ospf area 0.0.0.0
```

2. Configure the traffic engineering metric of the OSPF network segments.

```
[edit protocols ospf area 0.0.0.0]
user@host# set interface fe-0/1/1 te-metric 10
```

3. If you are done configuring the device, commit the configuration.

```
[edit protocols ospf area 0.0.0.0]
user@host# commit
```

**Results** Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
area 0.0.0.0 {
  interface fe-0/1/1.0 {
    te-metric 10;
  }
}
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.



**Verification**

Confirm that the configuration is working properly.

**Verifying the Configured Traffic Engineering Metric**

**Purpose** Verify the traffic engineering metric value. Confirm that Metric field displays the configured traffic engineering metric.

**Action** From operational mode, enter the **show ted database extensive** command.

**Related Documentation**

- [OSPF Configuration Overview](#)
- [Junos OS MPLS Applications Configuration Guide](#)

## Example: Configuring OSPF Passive Traffic Engineering Mode

- [OSPF Passive Traffic Engineering Mode on page 3400](#)
- [Example: Configuring OSPF Passive Traffic Engineering Mode on page 3400](#)

### OSPF Passive Traffic Engineering Mode

---

Ordinarily, interior routing protocols such as OSPF are not run on links between autonomous systems. However, for inter-AS traffic engineering to function properly, information about the inter-AS link—in particular, the address on the remote interface—must be made available inside the autonomous system (AS). This information is not normally included either in the external BGP (EBGP) reachability messages or in the OSPF routing advertisements.

To flood this link address information within the AS and make it available for traffic engineering calculations, you must configure OSPF passive mode for traffic engineering on each inter-AS interface. You must also supply the remote address for OSPF to distribute and include it in the traffic engineering database. OSPF traffic engineering mode allows MPLS label-switched paths (LSPs) to dynamically discover OSPF AS boundary routers and to allow routers to establish a traffic engineering LSP across multiple autonomous systems.

### Example: Configuring OSPF Passive Traffic Engineering Mode

---

This example shows how to configure OSPF passive mode for traffic engineering on an inter-AS interface. The AS boundary router link between the EBGP peers must be a directly connected link and must be configured as a passive traffic engineering link.

- [Requirements on page 3400](#)
- [Overview on page 3401](#)
- [Configuration on page 3401](#)
- [Verification on page 3402](#)

**Requirements**

Before you begin:



- Configure the device interfaces. See the Junos® OS Network Interfaces.
- Configure BGP per your network requirements. See the Junos OS Routing Protocols Configuration Guide.
- Configure the LSP per your network requirements. See the Junos OS MPLS Applications Configuration Guide.
- Configure the router identifiers for the devices in your OSPF network. See [“Example: Configuring an OSPF Router Identifier” on page 3294](#).
- Control OSPF designated router election. See [“Example: Controlling OSPF Designated Router Election” on page 3296](#)
- Configure a single-area OSPF network. See [“Example: Configuring a Single-Area OSPF Network” on page 3299](#).
- Configure a multiarea OSPF network. See [“Example: Configuring a Multiarea OSPF Network” on page 3301](#).

### Overview

You can configure OSPF passive mode for traffic engineering on an inter-AS interface. The address used for the remote node of the OSPF passive traffic engineering link must be the same as the address used for the EBGP link. In this example, you configure interface **so-1/1/0** in area 0.0.0.1 as the inter-AS link to distribute traffic engineering information with OSPF within the AS and include the following settings:

- **passive**—Advertises the direct interface addresses on an interface without actually running OSPF on that interface. A passive interface is one for which the address information is advertised as an internal route in OSPF, but on which the protocol does not run.
- **traffic-engineering**—Configures an interface in OSPF passive traffic-engineering mode to enable dynamic discovery of OSPF AS boundary routers. By default, OSPF passive traffic-engineering mode is disabled.
- **remote-node-id**—Specifies the IP address at the far end of the inter-AS link. In this example, the remote IP address is 192.168.207.2.

### Configuration

To quickly configure OSPF passive mode for traffic engineering, copy the following command, remove any line breaks, and paste it into the CLI.

```
[edit]
set protocols ospf area 0.0.0.1 interface so-1/1/0 passive traffic-engineering remote-node-id
192.168.207.2
```

### Step-by-Step Procedure

To configure OSPF passive traffic engineering mode:

1. Create an OSPF area.



**NOTE:** To specify OSPFv3, include the **ospf3** statement at the **[edit protocols]** hierarchy level.



```
[edit]
user@host# set protocols ospf area 0.0.0.1
```

2. Configure interface **so-1/1/0** as a passive interface configured for traffic engineering, and specify the IP address at the far end of the inter-AS link.

```
[edit protocols ospf area 0.0.0.1]
user@host# set interface so-1/1/0 passive traffic-engineering remote-node-id
192.168.207.2
```

3. If you are done configuring the device, commit the configuration.

```
[edit protocols ospf]
user@host# commit
```

**Results** Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
area 0.0.0.1 {
  interface so-1/1/0.0 {
    passive {
      traffic-engineering {
        remote-node-id 192.168.207.2;
      }
    }
  }
}
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.

### **Verification**

Confirm that the configuration is working properly.

### **Verifying the Status of OSPF Interfaces**

**Purpose** Verify the status of OSPF interfaces. If the interface is passive, the Adj count field is 0 because no adjacencies have been formed. Next to this field, you might also see the word Passive.

**Action** From operational mode, enter the **show ospf interface detail** command for OSPFv2, and enter the **show ospf3 interface detail** command for OSPFv3.

**Related Documentation**

- [OSPF Configuration Overview](#)
- [About OSPF Interfaces on page 3322](#)
- [Junos OS MPLS Applications Configuration Guide](#)

---

## **OSPF Database Protection Configuration**

- [Example: Configuring OSPF Database Protection on page 3403](#)



## Example: Configuring OSPF Database Protection

- [OSPF Database Protection Overview on page 3403](#)
- [Configuring OSPF Database Protection on page 3404](#)

### OSPF Database Protection Overview

---

OSPF database protection allows you to limit the number of link-state advertisements (LSAs) not generated by the local router in a given OSPF routing instance, helping to protect the link-state database from being flooded with excessive LSAs. This feature is particularly useful if VPN routing and forwarding is configured on your provider edge and customer edge routers using OSPF as the routing protocol. An overrun link-state database on the customer edge router can exhaust resources on the provider edge router and impact the rest of the service provider network.

When you enable OSPF database protection, the maximum number of LSAs you specify includes all LSAs whose advertising router ID is not equal to the local router ID (nonself-generated LSAs). These might include external LSAs as well as LSAs with any scope such as the link, area, and autonomous system (AS).

Once the specified maximum LSA count is exceeded, the database typically enters into the ignore state. In this state, all neighbors are brought down, and nonself-generated LSAs are destroyed. In addition, the database sends out hellos but ignores all received packets. As a result, the database does not form any full neighbors, and therefore does not learn about new LSAs. However, if you have configured the **warning-only** option, only a warning is issued and the database does not enter the ignore state but continues to operate as before.

You can also configure one or more of the following options:

- A warning threshold for issuing a warning message before the LSA limit is reached.
- An ignore state time during which the database must remain in the ignore state and after which normal operations can be resumed.
- An ignore state count that limits the number of times the database can enter the ignore state, after which it must enter the isolate state. The isolate state is very similar to the ignore state, but has one important difference: once the database enters the isolate state, it must remain there until you issue a command to clear database protection before it can return to normal operations.
- A reset time during which the database must stay out of the ignore or isolate state before it is returned to a normal operating state.



## Configuring OSPF Database Protection

---

By configuring OSPF database protection, you can help prevent your OSPF link-state database from being overrun with excessive LSAs that are not generated by the local router. You specify the maximum number of LSAs whose advertising router ID is not the same as the local router ID in an OSPF instance. This feature is particularly useful if your provider edge and customer edge routers are configured with VPN routing and forwarding using OSPF.

OSPF database protection is supported on:

- Logical systems
- All routing instances supported by OSPFv2 and OSPFv3
- OSPFv2 and OSPFv3 topologies
- OSPFv3 realms

To configure OSPF database protection:

1. Include the **database-protection** statement at one of the following hierarchy levels:
  - [edit protocols ospf | ospf3]
  - [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols (ospf | ospf3)]
  - [edit routing-instances *routing-instance-name* protocols (ospf | ospf3)]
  - [edit routing-instances *routing-instance-name* protocols ospf3 realm (ipv4-unicast | ipv4-multicast | ipv6-unicast | ipv6-multicast)]
2. Include the **maximum-lsa *number*** statement.



**NOTE:** The **maximum-lsa** statement is mandatory, and there is no default value for it. If you omit this statement, you cannot configure OSPF database protection.

3. (Optional) Include the following statements:
  - **ignore-count *number***—Specify the number of times the database can enter the ignore state before it goes into the isolate state.
  - **ignore-time *seconds***—Specify the time limit the database must remain in the ignore state before it resumes regular operations.
  - **reset-time *seconds***—Specify the time during which the database must operate without being in either the ignore or isolate state before it is reset to a normal operating state.
  - **warning-threshold *percent***—Specify the percent of the maximum LSA number that must be exceeded before a warning message is issued.



4. (Optional) Include the **warning-only** statement to prevent the database from entering the ignore state or isolate state when the maximum LSA count is exceeded.



**NOTE:** If you include the **warning-only** statement, values for the other optional statements at the same hierarchy level are not used when the maximum LSA number is exceeded.

5. Verify your configuration by checking the database protection fields in the output of the **show ospf overview** command.

**Related  
Documentation**

- [OSPF Overview on page 3282](#)
- [OSPF Configuration Overview](#)

## OSPF Policy Configuration

- [Examples: Configuring OSPF Routing Policy on page 3405](#)
- [Examples: Configuring Routing Policy for Network Summaries on page 3421](#)

### Examples: Configuring OSPF Routing Policy

- [Understanding OSPF Routing Policy on page 3405](#)
- [Example: Injecting OSPF Routes into the BGP Routing Table on page 3407](#)
- [Example: Redistributing Static Routes into OSPF on page 3410](#)
- [Example: Configuring an OSPF Import Policy on page 3413](#)
- [Example: Configuring a Route Filter Policy to Specify Priority for Prefixes Learned Through OSPF on page 3417](#)

#### Understanding OSPF Routing Policy

Each routing policy is identified by a policy name. The name can contain letters, numbers, and hyphens (-) and can be up to 255 characters long. To include spaces in the name, enclose the entire name in double quotation marks. Each routing policy name must be unique within a configuration. Once a policy is created and named, it must be applied before it is active.

In the **import** statement, you list the name of the routing policy used to filter OSPF external routes from being installed into the routing tables of OSPF neighbors. You can filter the routes, but not link-state address (LSA) flooding. An external route is a route that is outside the OSPF Autonomous System (AS). The import policy does not impact the OSPF database. This means that the import policy has no impact on the link-state advertisements.

In the **export** statement, you list the name of the routing policy to be evaluated when routes are being exported from the routing table into OSPF.

By default, if a routing device has multiple OSPF areas, learned routes from other areas are automatically installed into area 0 of the routing table.



To specify more than one policy and create a policy chain, you list the policies using a space as a separator. If multiple policies are specified, the policies are evaluated in the order in which they are specified. As soon as an accept or reject action is executed, the policy chain evaluation ends.

This topic describes the following information:

- [Routing Policy Terms on page 3406](#)
- [Routing Policy Match Conditions on page 3406](#)
- [Routing Policy Actions on page 3407](#)

### ***Routing Policy Terms***

Routing policies are made up of one or more terms. A term is a named structure in which match conditions and actions are defined. You can define one or more terms. The name can contain letters, numbers, and hyphens ( - ) and can be up to 255 characters long. To include spaces in the name, enclose the entire name in double quotation marks.

Each term contains a set of match conditions and a set of actions:

- Match conditions are criteria that a route must match before the actions can be applied. If a route matches all criteria, one or more actions are applied to the route.
- Actions specify whether to accept or reject the route, control how a series of policies are evaluated, and manipulate the characteristics associated with a route.

### ***Routing Policy Match Conditions***

A match condition defines the criteria that a route must match for an action to take place. You can define one or more match conditions for each term. If a route matches all of the match conditions for a particular term, the actions defined for that term are processed.

Each term can include two statements, **from** and **to**, that define the match conditions:

- In the **from** statement, you define the criteria that an incoming route must match. You can specify one or more match conditions. If you specify more than one, they all must match the route for a match to occur.

The **from** statement is optional. If you omit the **from** and the **to** statements, all routes are considered to match.



**NOTE:** In export policies, omitting the **from** statement from a routing policy term might lead to unexpected results. For more information, see *Applying Routing Policies and Policy Chains to Routing Protocols* in the *Routing Policy Configuration Guide*.

---

- In the **to** statement, you define the criteria that an outgoing route must match. You can specify one or more match conditions. If you specify more than one, they all must match the route for a match to occur.



The order of the match conditions in a term is not important because a route must match all match conditions in a term for an action to be taken.

For a complete list of match conditions, see *Configuring Match Conditions in Routing Policy Terms* in the *Routing Policy Configuration Guide*.

### ***Routing Policy Actions***

An action defines what the routing device does with the route when the route matches all the match conditions in the **from** and **to** statements for a particular term. If a term does not have **from** and **to** statements, all routes are considered to match and the actions apply to all routes.

Each term can have one or more of the following types of actions. The actions are configured under the **then** statement.

- Flow control actions, which affect whether to accept or reject the route and whether to evaluate the next term or routing policy.
- Actions that manipulate route characteristics.
- Trace action, which logs route matches.

The **then** statement is optional. If you omit it, one of the following occurs:

- The next term in the routing policy, if one exists, is evaluated.
- If the routing policy has no more terms, the next routing policy, if one exists, is evaluated.
- If there are no more terms or routing policies, the **accept** or **reject** action specified by the default policy is executed.

For a complete list of routing policy actions, see *Configuring Actions in Routing Policy Terms* in the *Routing Policy Configuration Guide*.

### ***Example: Injecting OSPF Routes into the BGP Routing Table***

This example shows how to create a policy that injects OSPF routes into the BGP routing table.

- [Requirements on page 3407](#)
- [Overview on page 3408](#)
- [Configuration on page 3408](#)
- [Verification on page 3410](#)
- [Troubleshooting on page 3410](#)

#### ***Requirements***

Before you begin:

- Configure network interfaces.
- Configure external peer sessions. See [“Example: Configuring External BGP Point-to-Point Peer Sessions” on page 2644](#).



- Configure interior gateway protocol (IGP) sessions between peers.

### **Overview**

In this example, you create a routing policy called **injectpolicy1** and a routing term called **injectterm1**. The policy injects OSPF routes into the BGP routing table.

### **Configuration**

- [Configuring the Routing Policy on page 3408](#)
- [Configuring Tracing for the Routing Policy on page 3409](#)

### **Configuring the Routing Policy**

#### **CLI Quick Configuration**

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set policy-options policy-statement injectpolicy1 term injectterm1 from protocol ospf
set policy-options policy-statement injectpolicy1 term injectterm1 from area 0.0.0.1
set policy-options policy-statement injectpolicy1 term injectterm1 then accept
set protocols bgp export injectpolicy1
```

#### **Step-by-Step Procedure**

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To inject OSPF routes into a BGP routing table:

1. Create the policy term.

```
[edit policy-options policy-statement injectpolicy1]
user@host# set term injectterm1
```

2. Specify OSPF as a match condition.

```
[edit policy-options policy-statement injectpolicy1 term injectterm1]
user@host# set from protocol ospf
```

3. Specify the routes from an OSPF area as a match condition.

```
[edit policy-options policy-statement injectpolicy1 term injectterm1]
user@host# set from area 0.0.0.1
```

4. Specify that the route is to be accepted if the previous conditions are matched.

```
[edit policy-options policy-statement injectpolicy1 term injectterm1]
user@host# set then accept
```

5. Apply the routing policy to BGP.

```
[edit]
user@host# set protocols bgp export injectpolicy1
```



**Results** Confirm your configuration by entering the **show policy-options** and **show protocols bgp** commands from configuration mode. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show policy-options
policy-statement injectpolicy1 {
  term injectterm1 {
    from {
      protocol ospf;
      area 0.0.0.1;
    }
    then accept;
  }
}

user@host# show protocols bgp
export injectpolicy1;
```

If you are done configuring the device, enter **commit** from configuration mode.

### *Configuring Tracing for the Routing Policy*

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set policy-options policy-statement injectpolicy1 term injectterm1 then trace
set routing-options traceoptions file ospf-bgp-policy-log
set routing-options traceoptions file size 5m
set routing-options traceoptions file files 5
set routing-options traceoptions flag policy
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

1. Include a trace action in the policy.

```
[edit policy-options policy-statement injectpolicy1 term injectterm1]
user@host# then trace
```

2. Configure the tracing file for the output.

```
[edit routing-options traceoptions]
user@host# set file ospf-bgp-policy-log
user@host# set file size 5m
user@host# set file files 5
user@host# set flag policy
```

**Results** Confirm your configuration by entering the **show policy-options** and **show routing-options** commands from configuration mode. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show policy-options
```



```
policy-statement injectpolicy1 {
  term injectterm1 {
    then {
      trace;
    }
  }
}

user@host# show routing-options
traceoptions {
  file ospf-bgp-policy-log size 5m files 5;
  flag policy;
}
```

If you are done configuring the device, enter **commit** from configuration mode.

### **Verification**

Confirm that the configuration is working properly.

### **Verifying That the Expected BGP Routes Are Present**

**Purpose** Verify the effect of the export policy.

**Action** From operational mode, enter the **show route** command.

### **Troubleshooting**

- [Using the show log Command to Examine the Actions of the Routing Policy on page 3410](#)

### **Using the show log Command to Examine the Actions of the Routing Policy**

**Problem** The routing table contains unexpected routes, or routes are missing from the routing table.

**Solution** If you configure policy tracing as shown in this example, you can run the **show log ospf-bgp-policy-log** command to diagnose problems with the routing policy. The **show log ospf-bgp-policy-log** command displays information about the routes that the **injectpolicy1** policy term analyzes and acts upon.

---

### **Example: Redistributing Static Routes into OSPF**

This example shows how to create a policy that redistributes static routes into OSPF.

- [Requirements on page 3410](#)
- [Overview on page 3411](#)
- [Configuration on page 3411](#)
- [Verification on page 3412](#)

### **Requirements**

Before you begin:

- Configure the device interfaces. See the Junos® OS Network Interfaces.



- Configure static routes. See Examples: Configuring Static Routes in the Junos OS Routing Protocols Configuration Guide.

### Overview

In this example, you create a routing policy called `exportstatic1` and a routing term called `exportstatic1`. The policy injects static routes into OSPF. This example includes the following settings:

- **policy-statement**—Defines the routing policy. You specify the name of the policy and further define the elements of the policy. The policy name must be unique and can contain letters, numbers, and hyphens ( - ) and be up to 255 characters long.
- **term**—Defines the match condition and applicable actions for the routing policy. The term name can contain letters, numbers, and hyphens ( - ) and be up to 255 characters long. You specify the name of the term and define the criteria that an incoming route must match by including the **from** statement and the action to take if the route matches the conditions by including the **then** statement. In this example you specify the static protocol match condition and the accept action.
- **export**—Applies the export policy you created to be evaluated when routes are being exported from the routing table into OSPF.

### Configuration

#### CLI Quick Configuration

To quickly create a policy that injects static routes into OSPF, copy the following commands and paste them into the CLI.

```
[edit]
set policy-options policy-statement exportstatic1 term exportstatic1 from protocol static
set policy-options policy-statement exportstatic1 term exportstatic1 then accept
set protocols ospf export exportstatic1
```

#### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Modifying the Junos OS Configuration in CLI User Guide*.

To inject static routes into OSPF:

1. Create the routing policy.
 

```
[edit]
user@host# edit policy-options policy-statement exportstatic1
```
2. Create the policy term.
 

```
[edit policy-options policy-statement exportstatic1]
user@host# set term exportstatic1
```
3. Specify static as a match condition.
 

```
[edit policy-options policy-statement exportstatic1 term exportstatic1]
user@host# set from protocol static
```
4. Specify that the route is to be accepted if the previous condition is matched.
 

```
[edit policy-options policy-statement exportstatic1 term exportstatic1]
```



```
user@host# set then accept
```

5. Apply the routing policy to OSPF.



NOTE: For OSPFv3, include the `ospf3` statement at the [edit protocols] hierarchy level.

```
[edit]
user@host# set protocols ospf export exportstatic1
```

6. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

**Results** Confirm your configuration by entering the `show policy-options` and `show protocols ospf` commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show policy-options
policy-statement exportstatic1 {
  term exportstatic1 {
    from protocol static;
    then accept;
  }
}

user@host# show protocols ospf
export exportstatic1;
```

To confirm your OSPFv3 configuration, enter the `show policy-options` and the `show protocols ospf3` commands.

#### *Verification*

Confirm that the configuration is working properly.

- [Verifying That the Expected Static Routes Are Present on page 3412](#)
- [Verifying That AS External LSAs Are Added to the Routing Table on page 3412](#)

#### *Verifying That the Expected Static Routes Are Present*

**Purpose** Verify the effect of the export policy.

**Action** From operational mode, enter the `show route` command.

#### *Verifying That AS External LSAs Are Added to the Routing Table*

**Purpose** On the routing device where you configured the export policy, verify that the routing device originates an AS external LSA for the static routes that are added to the routing table.



**Action** From operational mode, enter the **show ospf database** command for OSPFv2, and enter the **show ospf3 database** command for OSPFv3.

### Example: Configuring an OSPF Import Policy

This example shows how to create an OSPF import policy. OSPF import policies apply to external routes only. An external route is a route that is outside the OSPF autonomous system (AS).

- [Requirements on page 3413](#)
- [Overview on page 3413](#)
- [Configuration on page 3414](#)
- [Verification on page 3416](#)

#### Requirements

Before you begin:

- Configure static routes. See Examples: Configuring Static Routes in the Junos OS Routing Protocols Configuration Guide.
- Configure the router identifiers for the devices in your OSPF network. See [“Example: Configuring an OSPF Router Identifier” on page 3294](#).
- Control OSPF designated router election. See [“Example: Controlling OSPF Designated Router Election” on page 3296](#).
- Configure a single-area OSPF network. See [“Example: Configuring a Single-Area OSPF Network” on page 3299](#).

#### Overview

External routes are learned by AS boundary routers. External routes can be advertised throughout the OSPF domain if you configure the AS boundary router to redistribute the route into OSPF. An external route might be learned by the AS boundary router from a routing protocol other than OSPF, or the external route might be a static route that you configure on the AS boundary router.

For OSPFv3, the link-state advertisement (LSA) is referred to as the interarea prefix LSA and performs the same function as a network-summary LSA performs for OSPFv2. An area border router (ABR) originates an interarea prefix LSA for each IPv6 prefix that must be advertised into an area.

OSPF import policy allows you to prevent external routes from being added to the routing tables of OSPF neighbors. The import policy does not impact the OSPF database. This means that the import policy has no impact on the link-state advertisements. The filtering is done only on external routes in OSPF. The intra-area and interarea routes are not considered for filtering. The default action is to accept the route when the route does not match the policy.



This example includes the following OSPF policy settings:

- **policy-statement**—Defines the routing policy. You specify the name of the policy and further define the elements of the policy. The policy name must be unique and can contain letters, numbers, and hyphens ( - ) and be up to 255 characters long.
- **export**—Applies the export policy you created to be evaluated when network summary LSAs are flooded into an area. In this example, the export policy is named `export_static`.
- **import**—Applies the import policy you created to prevent external routes from being added to the routing table. In this example, the import policy is named `filter_routes`.

The devices you configure in this example represent the following functions:

- **R1**—Device R1 is in area 0.0.0.0 and has a direct connection to device R2. R1 has an OSPF export policy configured. The export policy redistributes static routes from R1's routing table into R1's OSPF database. Because the static route is in R1's OSPF database, the route is advertised in an LSA to R1's OSPF neighbor. R1's OSPF neighbor is device R2.
- **R2**—Device R2 is in area 0.0.0.0 and has a direct connection to device R1. R2 has an OSPF import policy configured that matches the static route to the 10.0.16.0/30 network and prevents the static route from being installed in R2's routing table. R2's OSPF neighbor is device R1.

### *Configuration*

#### **CLI Quick Configuration**

To quickly configure an OSPF import policy, copy the following commands, removing any line breaks, and then paste the commands into the CLI.

Configuration on Device R1:

```
[edit]
set interfaces so-0/2/0 unit 0 family inet address 10.0.2.1/30
set protocols ospf export export_static
set protocols ospf area 0.0.0.0 interface so-0/2/0
set policy-options policy-statement export_static from protocol static
set policy-options policy-statement export_static then accept
```

Configuration on Device R2:

```
[edit]
set interfaces so-0/2/0 unit 0 family inet address 10.0.2.2/30
set protocols ospf import filter_routes
set protocols ospf area 0.0.0.0 interface so-0/2/0
set policy-options policy-statement filter_routes from route-filter 10.0.16.0/30 exact
set policy-options policy-statement filter_routes then reject
```

#### **Step-by-Step Procedure**

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Modifying the Junos OS Configuration* in *CLI User Guide*.

To configure an OSPF import policy:

1. Configure the interfaces.



```
[edit]
user@R1# set interfaces so-0/2/0 unit 0 family inet address 10.0.2.1/30
```

```
[edit]
user@R2# set interfaces so-0/2/0 unit 0 family inet address 10.0.2.2/30
```

2. Enable OSPF on the interfaces.



**NOTE:** For OSPFv3, include the `ospf3` statement at the `[edit protocols]` hierarchy level.

```
[edit]
user@R1# set protocols ospf area 0.0.0.0 interface so-0/2/0
```

```
[edit]
user@R2# set protocols ospf area 0.0.0.0 interface so-0/2/0
```

3. On R1, redistribute the static route into OSPF.

```
[edit]
user@R1# set protocols ospf export export_static
user@R1# set policy-options policy-statement export_static from protocol static
user@R1# set policy-options policy-statement export_static then accept
```

4. On R2, configure the OSPF import policy.

```
[edit]
user@R2# set protocols ospf import filter_routes
user@R2# set policy-options policy-statement filter_routes from route-filter
10.0.16.0/30 exact
user@R2# set policy-options policy-statement filter_routes then reject
```

5. If you are done configuring the devices, commit the configuration.

```
[edit]
user@host# commit
```

**Results** Confirm your configuration by entering the `show interfaces`, `show policy-options`, and `show protocols ospf` commands on the appropriate device. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Output for R1:

```
user@R1# show interfaces
so-0/2/0 {
  unit 0 {
    family inet {
      address 10.0.2.1/30;
    }
  }
}

user@R1# show policy-options
policy-statement export_static {
  from protocol static;
```



```
    then accept;
  }

user@R1# show protocols ospf
export export_static;
area 0.0.0.0 {
  interface so-0/2/0.0;
}
```

Output for R2:

```
user@R2# show interfaces
so-0/2/0 {
  unit 0 {
    family inet {
      address 10.0.2.2/30;
    }
  }
}

user@R2# show policy-options
policy-statement filter_routes {
  from {
    route-filter 10.0.16.0/30 exact;
  }
  then reject;
}

user@R2# show protocols ospf
import filter_routes;
area 0.0.0.0 {
  interface so-0/2/0.0;
}
```

To confirm your OSPFv3 configuration, enter the **show interfaces**, **show policy-options**, **show routing-options**, and **show protocols ospf3** commands on the appropriate device.

### **Verification**

Confirm that the configuration is working properly.

- [Verifying the OSPF Database on page 3416](#)
- [Verifying the Routing Table on page 3416](#)

#### **Verifying the OSPF Database**

**Purpose** Verify that OSPF is advertising the static route in the OSPF database.

**Action** From operational mode, enter the **show ospf database** for OSPFv2, and enter the **show ospf3 database** command for OSPFv3.

#### **Verifying the Routing Table**

**Purpose** Verify the entries in the routing table.

**Action** From operational mode, enter the **show route** command.



### Example: Configuring a Route Filter Policy to Specify Priority for Prefixes Learned Through OSPF

This example shows how to create an OSPF import policy that prioritizes specific prefixes learned through OSPF.

- [Requirements on page 3417](#)
- [Overview on page 3417](#)
- [Configuration on page 3418](#)
- [Verification on page 3420](#)

#### Requirements

Before you begin:

- Configure the device interfaces. See the Junos® OS Network Interfaces.
- Configure the router identifiers for the devices in your OSPF network. See [“Example: Configuring an OSPF Router Identifier” on page 3294](#).
- Control OSPF designated router election See [“Example: Controlling OSPF Designated Router Election” on page 3296](#)
- Configure a single-area OSPF network. See [“Example: Configuring a Single-Area OSPF Network” on page 3299](#).
- Configure a multiarea OSPF network. See [“Example: Configuring a Multiarea OSPF Network” on page 3301](#).

#### Overview

In a network with a large number of OSPF routes, it can be useful to control the order in which routes are updated in response to a network topology change. In Junos OS Release 9.3 and later, you can specify a priority of high, medium, or low for prefixes included in an OSPF import policy. In the event of an OSPF topology change, high priority prefixes are updated in the routing table first, followed by medium and then low priority prefixes.

OSPF import policy can only be used to set priority or to filter OSPF external routes. If an OSPF import policy is applied that results in a **reject** terminating action for a nonexternal route, then the **reject** action is ignored and the route is accepted anyway. By default, such a route is now installed in the routing table with a priority of low. This behavior prevents traffic black holes, that is, silently discarded traffic, by ensuring consistent routing within the OSPF domain.

In general, OSPF routes that are not explicitly assigned a priority are treated as priority medium, except for the following:

- Summary discard routes have a default priority of low.
- Local routes that are not added to the routing table are assigned a priority of low.
- External routes that are rejected by import policy and thus not added to the routing table are assigned a priority of low.



Any available match criteria applicable to OSPF routes can be used to determine the priority. Two of the most commonly used match criteria for OSPF are the **route-filter** and **tag** statements.

In this example, the routing device is in area 0.0.0.0, with interfaces **fe-0/1/0** and **fe-1/1/0** connecting to neighboring devices. You configure an import routing policy named **ospf-import** to specify a priority for prefixes learned through OSPF. Routes associated with these prefixes are installed in the routing table in the order of the prefixes' specified priority. Routes matching **200.3.0.0/16 orlonger** are installed first because they have a priority of **high**. Routes matching **200.2.0.0/16 orlonger** are installed next because they have a priority of **medium**. Routes matching **200.1.0.0/16 orlonger** are installed last because they have a priority of **low**. You then apply the import policy to OSPF.



**NOTE:** The priority value takes effect when a new route is installed, or when there is a change to an existing route.

### Configuration

#### CLI Quick Configuration

To quickly configure an OSPF import policy that prioritizes specific prefixes learned through OSPF, copy the following commands, removing any line breaks, and then paste the commands into the CLI.

```
[edit]
set interfaces fe-0/1/0 unit 0 family inet address 192.168.8.4/30
set interfaces fe-0/1/0 unit 0 family inet address 192.168.8.5/30
set policy-options policy-statement ospf-import term t1 from route-filter 200.1.0.0/16
  orlonger
set policy-options policy-statement ospf-import term t1 then priority low
set policy-options policy-statement ospf-import term t1 then accept
set policy-options policy-statement ospf-import term t2 from route-filter 200.2.0.0/16
  orlonger
set policy-options policy-statement ospf-import term t2 then priority medium
set policy-options policy-statement ospf-import term t2 then accept
set policy-options policy-statement ospf-import term t3 from route-filter 200.3.0.0/16
  orlonger
set policy-options policy-statement ospf-import term t3 then priority high
set policy-options policy-statement ospf-import term t3 then accept
set protocols ospf import ospf-import
set protocols ospf area 0.0.0.0 interface fe-0/1/0
set protocols ospf area 0.0.0.0 interface fe-1/1/0
```

#### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Modifying the Junos OS Configuration* in *CLI User Guide*.

To configure an OSPF import policy that prioritizes specific prefixes:

1. Configure the interfaces.

```
[edit]
user@host# set interfaces fe-0/1/0 unit 0 family inet address 192.168.8.4/30
user@host# set interfaces fe-0/2/0 unit 0 family inet address 192.168.8.5/30
```



2. Enable OSPF on the interfaces.



**NOTE:** For OSPFv3, include the `ospf3` statement at the [edit protocols] hierarchy level.

```
[edit]
user@host# set protocols ospf area 0.0.0.0 interface fe-0/1/0
user@host# set protocols ospf area 0.0.0.0 interface fe-0/2/0
```

3. Configure the policy to specify the priority for prefixes learned through OSPF.

```
[edit ]
user@host# set policy-options policy-statement ospf-import term t1 from route-filter
200.1.0.0/16 orlonger
user@host# set policy-options policy-statement ospf-import term t1 then priority
low
user@host# set policy-options policy-statement ospf-import term t1 then accept
user@host# set policy-options policy-statement ospf-import term t2 from route-filter
200.2.0.0/16 orlonger
user@host# set policy-options policy-statement ospf-import term t2 then priority
medium
user@host# set policy-options policy-statement ospf-import term t2 then accept
user@host# set policy-options policy-statement ospf-import term t3 from route-filter
200.3.0.0/16 orlonger
user@host# set policy-options policy-statement ospf-import term t3 then priority
high
user@host# set policy-options policy-statement ospf-import term t3 then accept
```

4. Apply the policy to OSPF.

```
[edit]
user@host# set protocols ospf import ospf-import
```

5. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

**Results** Confirm your configuration by entering the `show interfaces`, `show policy-options`, and the `show protocols ospf` commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show interfaces
fe-0/1/0 {
  unit 0 {
    family inet {
      address 192.168.8.4/30;
    }
  }
}
fe-0/2/0 {
  unit 0 {
    family inet {
      address 192.168.8.5/30;
```



```
    }  
  }  
}  
  
user@host# show policy-options  
policy-statement ospf-import {  
  term t1 {  
    from {  
      route-filter 200.1.0.0/16 orlonger;  
    }  
    then {  
      priority low;  
      accept;  
    }  
  }  
  term t2 {  
    from {  
      route-filter 200.2.0.0/16 orlonger;  
    }  
    then {  
      priority medium;  
      accept;  
    }  
  }  
  term t3 {  
    from {  
      route-filter 200.3.0.0/16 orlonger;  
    }  
    then {  
      priority high;  
      accept;  
    }  
  }  
}  
  
user@host# show protocols ospf  
import ospf-import;  
area 0.0.0.0 {  
  interface fe-0/1/0.0;  
  interface fe-0/2/0.0;  
}
```

To confirm your OSPFv3 configuration, enter the **show interfaces**, **show policy-options**, and **show protocols ospf3** commands.

### ***Verification***

Confirm that the configuration is working properly.

### ***Verifying the Prefix Priority in the OSPF Routing Table***

**Purpose** Verify the priority assigned to the prefix in the OSPF routing table.

**Action** From operational mode, enter the **show ospf route detail** for OSPFv2, and enter the **show ospf3 route detail** command for OSPFv3.



- Related Documentation**
- [OSPF Overview on page 3282](#)
  - [OSPF Configuration Overview](#)
  - [Configuring Match Conditions in Routing Policy Terms in the Routing Policy Configuration Guide](#)
  - [Configuring Actions in Routing Policy Terms in the Routing Policy Configuration Guide](#)

## Examples: Configuring Routing Policy for Network Summaries

- [Import and Export Policies for Network Summaries Overview on page 3421](#)
- [Example: Configuring an OSPF Export Policy for Network Summaries on page 3421](#)
- [Example: Configuring an OSPF Import Policy for Network Summaries on page 3430](#)

### Import and Export Policies for Network Summaries Overview

By default, OSPF uses network-summary link-state advertisements (LSAs) to transmit route information across area boundaries. Each area border router (ABR) floods network-summary LSAs to other routing devices in the same area. The ABR also controls which routes from the area are used to generate network-summary LSAs into other areas. Each ABR maintains a separate topological database for each area to which they are connected. In Junos OS Release 9.1 and later, you can configure export and import policies for OSPFv2 and OSPFv3 that enable you to control how network-summary LSAs, which contain information about interarea OSPF prefixes, are distributed and generated. For OSPFv3, the LSA is referred to as the interarea prefix LSA and performs the same function as a network-summary LSA performs for OSPFv2. An ABR originates an interarea prefix LSA for each IPv6 prefix that must be advertised into an area.

The export policy enables you to specify which summary LSAs are flooded into an area. The import policy enables you to control which routes learned from an area are used to generate summary LSAs into other areas. You define a routing policy at the **[edit policy-options policy-statement *policy-name*]** hierarchy level. As with all OSPF export policies, the default for network-summary LSA export policies is to reject everything. Similarly, as with all OSPF import policies, the default for network-summary LSA import policies is to accept all OSPF routes.

### Example: Configuring an OSPF Export Policy for Network Summaries

This example shows how to create an OSPF export policy to control the network-summary (Type 3) LSAs that the ABR floods into an OSPF area.

- [Requirements on page 3422](#)
- [Overview on page 3422](#)
- [Configuration on page 3424](#)
- [Verification on page 3429](#)



### Requirements

Before you begin:

- Configure the router identifiers for the devices in your OSPF network. See [“Example: Configuring an OSPF Router Identifier” on page 3294](#).
- Control OSPF designated router election. See [“Example: Controlling OSPF Designated Router Election” on page 3296](#)

### Overview

OSPF uses network-summary LSAs to transmit route information across area boundaries. Depending on your network environment, you might want to further filter the network-summary LSAs between OSPF areas. For example, if you create OSPF areas to define administrative boundaries, you might not want to advertise internal route information between those areas. To further improve the control of route distribution between multiple OSPF areas, you can configure network summary policies on the ABR for the area that you want to filter the advertisement of network-summary LSAs.



**NOTE:** For OSPFv3, the LSA is referred to as the interarea prefix LSA and performs the same function as a network-summary LSA performs for OSPFv2. An ABR originates an interarea prefix LSA for each IPv6 prefix that must be advertised into an area. In this topic, the terms network summary policy and network-summary policy are used to describe both OSPFv2 and OSPFv3 functionality.


The following guidelines apply to export network summary policies:

- You should have a thorough understanding of your network before configuring these policies. Incorrect network summary policy configuration might result in an unintended result such as suboptimal routing or dropped traffic.
- We recommend that you use the **route-filter** policy match condition for these types of policies.
- We recommend that you use the **accept** and **reject** routing policy terms for these types of policies.

[Figure 104 on page 3423](#) shows a sample topology with three OSPF areas. R4 generates network summaries for the routes in area 4 and sends them out of area 4 to area 0. R3 generates network summaries for the routes in area 3 and sends them out of area 3 to area 0.



**Figure 104: Sample Topology Used for an OSPF Export Network Summary Policy**

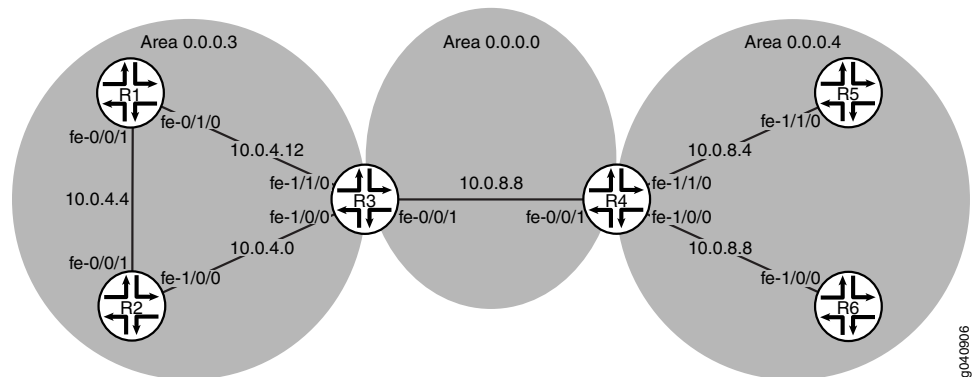

In this example, you configure R4 with an export network summary policy named `export-policy` that only allows routes that match the `10.0.4.4` prefix from area 3 into area 4. The export policy controls the network-summary LSAs that R4 floods into area 4. This results in only the allowed interarea route to enter area 4, and all other interarea routes to be purged from the OSPF database and the routing table of the devices in area 4. You first define the policy and then apply it to the ABR by including the **network-summary-export** statement for OSPFv2 or the **inter-area-prefix-export** statement for OSPFv3.

The devices operate as follows:

- **R1**—Device R1 is an internal router in area 3. Interface **fe-0/1/0** has an IP address of `10.0.4.13/30` and connects to R3. Interface **fe-0/0/1** has an IP address of `10.0.4.5/30` and connects to R2.
- **R2**—Device R2 is an internal router in area 3. Interface **fe-0/0/1** has an IP address of `10.0.4.6/30` and connects to R1. Interface **fe-1/0/0** has an IP address of `10.0.4.3` and connects to R3.
- **R3**—Device R3 participates in area 3 and area 0. R3 is the ABR between area 3 and area 0, and passes network-summary LSAs between the areas. Interface **fe-1/0/0** has an IP address of `10.0.4.2/30` and connects to R2. Interface **fe-1/1/0** has an IP address of `10.0.4.14/30` and connects to R1. Interface **fe-0/0/1** has an IP address of `10.0.2.3/30` and connects to R4.
- **R4**—Device R4 participates in area 0 and area 4. R4 is the ABR between area 0 and area 4, and passes network-summary LSAs between the areas. Interface **fe-0/0/1** has an IP address of `10.0.2.4/30` and connects to R3. Interface **fe-1/1/0** has an IP address of `10.0.8.3/30` and connects to R5. Interface **fe-1/0/0** has an IP address of `10.0.8.6/30` and connects to R6.
- **R5**—Device R5 is an internal router in area 4. Interface **fe-1/1/0** has an IP address of `10.0.8.5/30` and connects to R4.
- **R6**—Device R6 is an internal router in area 4. Interface **fe-1/0/0** has an IP address of `10.0.8.7/30` and connects to R4.



### Configuration

**CLI Quick Configuration** To quickly configure an OSPF export policy for network summaries, copy the following commands, removing any line breaks, and then paste the commands into the CLI.

Configuration on Device R1:

```
[edit]
set interfaces fe-0/1/0 unit 0 family inet address 10.0.4.13/30
set interfaces fe-0/0/1 unit 0 family inet address 10.0.4.5/30
set protocols ospf area 0.0.0.3 interface fe-0/1/0
set protocols ospf area 0.0.0.3 interface fe-0/0/1
```

Configuration on Device R2:

```
[edit]
set interfaces fe-0/1/0 unit 0 family inet address 10.0.4.6/30
set interfaces fe-1/0/0 unit 0 family inet address 10.0.4.3/30
set protocols ospf area 0.0.0.3 interface fe-0/1/0
set protocols ospf area 0.0.0.3 interface fe-1/0/0
```

Configuration on Device R3:

```
[edit]
set interfaces fe-1/0/0 unit 0 family inet address 10.0.4.2/30
set interfaces fe-1/1/0 unit 0 family inet address 10.0.4.14/30
set interfaces fe-0/0/1 unit 0 family inet address 10.0.2.3/30
set protocols ospf area 0.0.0.3 interface fe-1/0/0
set protocols ospf area 0.0.0.3 interface fe-1/1/0
set protocols ospf area 0.0.0.0 interface fe-0/0/1
```

Configuration on Device R4:

```
[edit]
set interfaces fe-0/0/1 unit 0 family inet address 10.0.2.4/30
set interfaces fe-1/1/0 unit 0 family inet address 10.0.8.3/30
set interfaces fe-1/0/0 unit 0 family inet address 10.0.8.6/30
set policy-options policy-statement export-policy term term1 from route-filter 10.0.4.4/30
  prefix-length-range /30-/30
set policy-options policy-statement export-policy term term1 then accept
set protocols ospf area 0.0.0.0 interface fe-0/0/1
set protocols ospf area 0.0.0.4 interface fe-0/1/0
set protocols ospf area 0.0.0.4 interface fe-1/0/0
set protocols ospf area 0.0.0.4 network-summary-export export-policy
```

Configuration on Device R5:

```
[edit]
set interfaces fe-1/1/0 unit 0 family inet address 10.0.8.5/30
set protocols ospf area 0.0.0.4 interface fe-0/1/0
```

Configuration on Device R6:

```
[edit]
set interfaces fe-1/0/0 unit 0 family inet address 10.0.8.7/30
set protocols ospf area 0.0.0.4 interface fe-1/0/0
```



**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Modifying the Junos OS Configuration in CLI User Guide*.

To configure an OSPF export policy for network summaries:

1. Configure the interfaces.



**NOTE:** For OSPFv3, use IPv6 addresses.

```
[edit]
user@R1# set interfaces fe-0/1/0 unit 0 family inet address 10.0.4.13/30
user@R1# set interfaces fe-0/0/1 unit 0 family inet address 10.0.4.5/30

[edit]
user@R2# set interfaces fe-0/1/0 unit 0 family inet address 10.0.4.6/30
user@R2# set interfaces fe-1/0/0 unit 0 family inet address 10.0.4.3/30

[edit]
user@R3# set interfaces fe-1/0/0 unit 0 family inet address 10.0.4.2/30
user@R3# set interfaces fe-1/1/0 unit 0 family inet address 10.0.4.14/30
user@R3# set interfaces fe-0/0/1 unit 0 family inet address 10.0.2.3/30

[edit]
user@R4# set interfaces fe-0/0/1 unit 0 family inet address 10.0.2.4/30
user@R4# set interfaces fe-1/1/0 unit 0 family inet address 10.0.8.3/30
user@R4# set interfaces fe-1/0/0 unit 0 family inet address 10.0.8.6/30

[edit]
user@R5# set interfaces fe-1/1/0 unit 0 family inet address 10.0.8.5/30

[edit]
user@R6# set interfaces fe-1/0/0 unit 0 family inet address 10.0.8.7/30
```

2. Enable OSPF on the interfaces.



**NOTE:** For OSPFv3, include the `ospf3` statement at the `[edit protocols]` hierarchy level.

```
[edit]
user@R1# set protocols ospf area 0.0.0.3 interface fe-0/1/0
user@R1# set protocols ospf area 0.0.0.3 interface fe-0/0/1

[edit]
user@R2# set protocols ospf area 0.0.0.3 interface fe-0/1/0
user@R2# set protocols ospf area 0.0.0.3 interface fe-1/0/0

[edit]
user@R3# set protocols ospf area 0.0.0.3 interface fe-1/0/0
user@R3# set protocols ospf area 0.0.0.3 interface fe-1/1/0
user@R3# set protocols ospf area 0.0.0.0 interface fe-0/0/1

[edit]
user@R4# set protocols ospf area 0.0.0.0 interface fe-0/0/1
```



```
user@R4# set protocols ospf area 0.0.0.4 interface fe-1/1/0
user@R4# set protocols ospf area 0.0.0.4 interface fe-1/0/0
```

```
[edit]
user@R5# set protocols ospf area 0.0.0.4 interface fe-1/1/0
[edit]
user@R6# set protocols ospf area 0.0.0.4 interface fe-1/0/0
```

3. On R4, configure the export network summary policy.

```
[edit ]
user@R4# set policy-options policy-statement export-policy term term1 from
route-filter 10.0.4.4/30 prefix-length-range /30-/30
user@R4# set policy-options policy-statement export-policy term term1 then accept
```

4. On R4, apply the export network summary policy to OSPF.



**NOTE:** For OSPFv3, include the inter-area-prefix-export statement at the [edit protocols ospf3 area *area-id*] hierarchy level.

```
[edit]
user@R4# set protocols ospf area 0.0.0.4 network-summary-export export-policy
```

5. If you are done configuring the devices, commit the configuration.

```
[edit]
user@host# commit
```

**Results** Confirm your configuration by entering the **show interfaces**, **show policy-options**, and **show protocols ospf** commands on the appropriate device. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Output for R1:

```
user@R1# show interfaces
fe-0/0/1 {
  unit 0 {
    family inet {
      address 10.0.4.5/30;
    }
  }
}
fe-1/1/0 {
  unit 0 {
    family inet {
      address 10.0.4.13/30;
    }
  }
}

user@R1# show protocols ospf
area 0.0.0.3 {
  interface fe-0/1/0.0;
```



```

interface fe-0/0/1.0;
}

```

Output for R2:

```

user@R2# show interfaces
fe-0/1/0 {
  unit 0 {
    family inet {
      address 10.0.4.6/30;
    }
  }
}
fe-1/0/0 {
  unit 0 {
    family inet {
      address 10.0.4.3/30;
    }
  }
}

user@R2# show protocols ospf
area 0.0.0.3 {
  interface fe-0/1/0.0;
  interface fe-1/0/0.0;
}

```

Output for R3:

```

user@R3# show interfaces
fe-0/0/1 {
  unit 0 {
    family inet {
      address 10.0.2.3/30;
    }
  }
}
fe-1/0/0 {
  unit 0 {
    family inet {
      address 10.0.4.2/30;
    }
  }
}
fe-1/1/0 {
  unit 0 {
    family inet {
      address 10.0.4.14/30;
    }
  }
}

user@R3# show protocols ospf
area 0.0.0.0 {
  interface fe-0/0/1.0;
}
area 0.0.0.3 {
  interface fe-1/0/0.0;
}

```



```
interface fe-1/1/0.0;  
}
```

Output for R4:

```
user@R4# show interfaces  
fe-0/0/1 {  
  unit 0 {  
    family inet {  
      address 10.0.2.4/30;  
    }  
  }  
}  
fe-1/0/0 {  
  unit 0 {  
    family inet {  
      address 10.0.8.6/30;  
    }  
  }  
}  
fe-1/1/0 {  
  unit 0 {  
    family inet {  
      address 10.0.8.3/30;  
    }  
  }  
}  
  
user@R4# show protocols ospf  
area 0.0.0.0 {  
  interface fe-0/0/1.0;  
}  
area 0.0.0.4 {  
  network-summary-export export-policy;  
  interface fe-1/0/0.0;  
  interface fe-1/1/0.0;  
}  
  
user@R4# show policy-options  
policy-statement export-policy {  
  term term1 {  
    from {  
      route-filter 10.0.4.4/30 prefix-length-range /30-/30;  
    }  
    then accept;  
  }  
}
```

Output for R5:

```
user@R5# show interfaces  
fe-1/1/0 {  
  unit 0 {  
    family inet {  
      address 10.0.8.5/30;  
    }  
  }  
}
```



```

user@R5# show protocols ospf
area 0.0.0.4 {
  interface fe-1/1/0.0;
}

```

Output for R6:

```

user@R6# show interfaces
fe-1/0/0 {
  unit 0 {
    family inet {
      address 10.0.8.7/30;
    }
  }
}

user@R6# show protocols ospf
area 0.0.0.4 {
  interface fe-1/0/0.0;
}

```

To confirm your OSPFv3 configuration, enter the **show interfaces**, **show policy-options**, and **show protocols ospf3** commands on the appropriate device.

### Verification

Confirm that the configuration is working properly.

- [Verifying the OSPF Database on page 3429](#)
- [Verifying the Routing Table on page 3429](#)

### Verifying the OSPF Database

**Purpose** Verify that the OSPF database for the devices in area 4 includes the interarea route that we permitted on the ABR R4. The other interarea routes that are not specified should age out or no longer be present in the OSPF database.

**Action** From operational mode, enter the **show ospf database netsummary area 0.0.0.4** command for OSPFv2, and enter the **show ospf3 database netsummary area 0.0.0.4** command for OSPFv3.

### Verifying the Routing Table

**Purpose** Verify that the routes corresponding to the rejected network summaries are no longer present in R4's, R5's, or R6's routing table.

**Action** From operational mode, enter the **show route protocol ospf** command for both OSPFv2 and OSPFv3.



### Example: Configuring an OSPF Import Policy for Network Summaries

---

This example shows how to create an OSPF import policy to control the network-summary (Type 3) LSAs that the ABR advertises out of an OSPF area.

- [Requirements on page 3430](#)
- [Overview on page 3430](#)
- [Configuration on page 3432](#)
- [Verification on page 3437](#)

#### Requirements

Before you begin:

- Configure the router identifiers for the devices in your OSPF network. See [“Example: Configuring an OSPF Router Identifier” on page 3294](#).
- Control OSPF designated router election. See [“Example: Controlling OSPF Designated Router Election” on page 3296](#).

#### Overview

OSPF uses network-summary LSAs to transmit route information across area boundaries. Depending on your network environment, you might want to further filter the network-summary LSAs between OSPF areas. For example, if you create OSPF areas to define administrative boundaries, you might not want to advertise internal route information between those areas. To further improve the control of route distribution between multiple OSPF areas, you can configure network summary policies on the ABR for the area that you want to filter the advertisement of network-summary LSAs.



**NOTE:** For OSPFv3, the LSA is referred to as the interarea prefix LSA and performs the same function as a network-summary LSA performs for OSPFv2. An ABR originates an interarea prefix LSA for each IPv6 prefix that must be advertised into an area. In this topic, the terms network summary policy and network-summary policy are used to describe both OSPFv2 and OSPFv3 functionality.


The following guidelines apply to import network summary policies:

- You should have a thorough understanding of your network before configuring these policies. Incorrect network summary policy configuration might result in an unintended result such as suboptimal routing or dropped traffic.
- We recommend that you use the **route-filter** policy match condition for these types of policies.
- We recommend that you use the **accept** and **reject** routing policy terms for these types of policies.



Figure 105 on page 3431 shows a sample topology with three OSPF areas. R4 generates network summaries for the routes in area 4 and sends them out of area 4 to area 0. R3 generates network summaries for the routes in area 3 and sends them out of area 3 to area 0.

**Figure 105: Sample Topology Used for an OSPF Import Network Summary Policy**

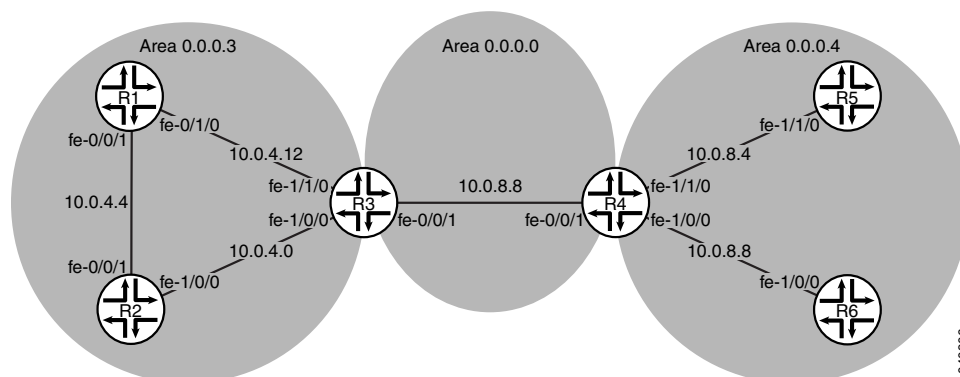

In this example, you configure R3 with an import network summary policy named `import-policy` so R3 only generates network summaries for the route 10.0.4.12/30. The import policy controls the routes and therefore the network summaries that R3 advertises out of area 3, so applying this policy means that R3 only advertises route 10.0.4.12/30 out of area 3. This results in existing network summaries from other interarea routes getting purged from the OSPF database in area 0 and area 4, as well as the routing tables of the devices in areas 0 and area 4. You first define the policy and then apply it to the ABR by including the **network-summary-import** statement for OSPFv2 or the **inter-area-prefix-import** statement for OSPFv3.

The devices operate as follows:

- **R1**—Device R1 is an internal router in area 3. Interface **fe-0/1/0** has an IP address of 10.0.4.13/30 and connects to R3. Interface **fe-0/0/1** has an IP address of 10.0.4.5/30 and connects to R2.
- **R2**—Device R2 is an internal router in area 3. Interface **fe-0/0/1** has an IP address of 10.0.4.6/30 and connects to R1. Interface **fe-1/0/0** has an IP address of 10.0.4.3 and connects to R3.
- **R3**—Device R3 participates in area 3 and area 0. R3 is the ABR between area 3 and area 0, and passes network-summary LSAs between the areas. Interface **fe-1/0/0** has an IP address of 10.0.4.2/30 and connects to R2. Interface **fe-1/1/0** has an IP address of 10.0.4.14/30 and connects to R1. Interface **fe-0/0/1** has an IP address of 10.0.2.3/30 and connects to R4.
- **R4**—Device R4 participates in area 0 and area 4. R4 is the ABR between area 0 and area 4, and passes network-summary LSAs between the areas. Interface **fe-0/0/1** has an IP address of 10.0.2.4/30 and connects to R3. Interface **fe-1/1/0** has an IP address of 10.0.8.3/30 and connects to R5. Interface **fe-1/0/0** has an IP address of 10.0.8.6/30 and connects to R6.



- R5—Device R5 is an internal router in area 4. Interface **fe-1/1/0** has an IP address of 10.0.8.5/30 and connects to R4.
- R6—Device R6 is an internal router in area 4. Interface **fe-1/0/0** has an IP address of 10.0.8.7/30 and connects to R4.

### *Configuration*

**CLI Quick Configuration** To quickly configure an OSPF import policy for network summaries, copy the following commands, removing any line breaks, and then paste the commands into CLI.

Configuration on Device R1:

```
[edit]
set interfaces fe-0/1/0 unit 0 family inet address 10.0.4.13/30
set interfaces fe-0/0/1 unit 0 family inet address 10.0.4.5/30
set protocols ospf area 0.0.0.3 interface fe-0/1/0
set protocols ospf area 0.0.0.3 interface fe-0/0/1
```

Configuration on Device R2:

```
[edit]
set interfaces fe-0/1/0 unit 0 family inet address 10.0.4.6/30
set interfaces fe-1/0/0 unit 0 family inet address 10.0.4.3/30
set protocols ospf area 0.0.0.3 interface fe-0/1/0
set protocols ospf area 0.0.0.3 interface fe-1/0/0
```

Configuration on Device R3:

```
[edit]
set interfaces fe-1/0/0 unit 0 family inet address 10.0.4.2/30
set interfaces fe-1/1/0 unit 0 family inet address 10.0.4.14/30
set interfaces fe-0/0/1 unit 0 family inet address 10.0.2.3/30
set policy-options policy-statement import-policy term term1 from route-filter 10.0.4.12/30
  prefix-length-range /30-/30
set policy-options policy-statement import-policy term term1 then accept
set protocols ospf area 0.0.0.3 interface fe-1/0/0
set protocols ospf area 0.0.0.3 interface fe-1/1/0
set protocols ospf area 0.0.0.0 interface fe-0/0/1
set protocols ospf area 0.0.0.3 network-summary-import import-policy
```

Configuration on Device R4:

```
[edit]
set interfaces fe-0/0/1 unit 0 family inet address 10.0.2.4/30
set interfaces fe-1/1/0 unit 0 family inet address 10.0.8.3/30
set interfaces fe-1/0/0 unit 0 family inet address 10.0.8.6/30
set protocols ospf area 0.0.0.0 interface fe-0/0/1
set protocols ospf area 0.0.0.4 interface fe-1/1/0
set protocols ospf area 0.0.0.4 interface fe-1/0/0
```

Configuration on Device R5:

```
[edit]
set interfaces fe-1/1/0 unit 0 family inet address 10.0.8.5/30
set protocols ospf area 0.0.0.4 interface fe-1/1/0
```

Configuration on Device R6:



```
[edit]
set interfaces fe-1/0/0 unit 0 family inet address 10.0.8.7/30
set protocols ospf area 0.0.0.4 interface fe-1/0/0
```

### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Modifying the Junos OS Configuration in CLI User Guide*.

To configure an OSPF export policy for network summaries:

1. Configure the interfaces.



**NOTE:** For OSPFv3, use IPv6 addresses.

```
[edit]
user@R1# set interfaces fe-0/1/0 unit 0 family inet address 10.0.4.13/30
user@R1# set interfaces fe-0/0/1 unit 0 family inet address 10.0.4.5/30
```

```
[edit]
user@R2# set interfaces fe-0/1/0 unit 0 family inet address 10.0.4.6/30
user@R2# set interfaces fe-1/0/0 unit 0 family inet address 10.0.4.3/30
```

```
[edit]
user@R3# set interfaces fe-1/0/0 unit 0 family inet address 10.0.4.2/30
user@R3# set interfaces fe-1/1/0 unit 0 family inet address 10.0.4.14/30
user@R3# set interfaces fe-0/0/1 unit 0 family inet address 10.0.2.3/30
```

```
[edit]
user@R4# set interfaces fe-0/0/1 unit 0 family inet address 10.0.2.4/30
user@R4# set interfaces fe-1/1/0 unit 0 family inet address 10.0.8.3/30
user@R4# set interfaces fe-1/0/0 unit 0 family inet address 10.0.8.6/30
```

```
[edit]
user@R5# set interfaces fe-1/1/0 unit 0 family inet address 10.0.8.5/30
```

```
[edit]
user@R6# set interfaces fe-1/0/0 unit 0 family inet address 10.0.8.7/30
```

2. Enable OSPF on the interfaces.



**NOTE:** For OSPFv3, include the `ospf3` statement at the `[edit protocols]` hierarchy level.

```
[edit]
user@R1# set protocols ospf area 0.0.0.3 interface fe-0/1/0
user@R1# set protocols ospf area 0.0.0.3 interface fe-0/0/1
```

```
[edit]
user@R2# set protocols ospf area 0.0.0.3 interface fe-0/1/0
user@R2# set protocols ospf area 0.0.0.3 interface fe-1/0/0
```

```
[edit]
user@R3# set protocols ospf area 0.0.0.3 interface fe-1/0/0
```



```
user@R3# set protocols ospf area 0.0.0.3 interface fe-1/1/0
user@R3# set protocols ospf area 0.0.0.0 interface fe-0/0/1
```

```
[edit]
user@R4# set protocols ospf area 0.0.0.0 interface fe-0/0/1
user@R4# set protocols ospf area 0.0.0.4 interface fe-1/1/0
user@R4# set protocols ospf area 0.0.0.4 interface fe-1/0/0
```

```
[edit]
user@R5# set protocols ospf area 0.0.0.4 interface fe-1/1/0
```

```
[edit]
user@R6# set protocols ospf area 0.0.0.4 interface fe-1/0/0
```

3. On R3, configure the import network summary policy.

```
[edit ]
user@R3# set policy-options policy-statement import-policy term term1 from
route-filter 10.0.4.12/30 prefix-length-range /30-/30
user@R3# set policy-options policy-statement export-policy term term1 then accept
```

4. On R3, apply the import network summary policy to OSPF.



**NOTE:** For OSPFv3, include the inter-area-prefix-export statement at the `[edit protocols ospf3 area area-id]` hierarchy level.

```
[edit]
user@R3# set protocols ospf area 0.0.0.4 network-summary-import import-policy
```

5. If you are done configuring the devices, commit the configuration.

```
[edit]
user@host# commit
```

**Results** Confirm your configuration by entering the **show interfaces**, **show policy-options**, and **show protocols ospf** commands on the appropriate device. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Output for R1:

```
user@R1# show interfaces
fe-0/0/1 {
  unit 0 {
    family inet {
      address 10.0.4.5/30;
    }
  }
}
fe-0/1/0 {
  unit 0 {
    family inet {
      address 10.0.4.13/30;
    }
  }
}
```



```
}  
user@R1# show protocols ospf  
area 0.0.0.3 {  
  interface fe-0/1/0.0;  
  interface fe-0/0/1.0;  
}
```

Output for R2:

```
user@R2# show interfaces  
fe-0/1/0 {  
  unit 0 {  
    family inet {  
      address 10.0.4.6/30;  
    }  
  }  
}  
fe-1/0/0 {  
  unit 0 {  
    family inet {  
      address 10.0.4.3/30;  
    }  
  }  
}  
user@R2# show protocols ospf  
area 0.0.0.3 {  
  interface fe-0/1/0.0;  
  interface fe-1/0/0.0;  
}
```

Output for R3:

```
user@R3# show interfaces  
fe-0/0/1 {  
  unit 0 {  
    family inet {  
      address 10.0.2.3/30;  
    }  
  }  
}  
fe-1/0/0 {  
  unit 0 {  
    family inet {  
      address 10.0.4.2/30;  
    }  
  }  
}  
fe-1/1/0 {  
  unit 0 {  
    family inet {  
      address 10.0.4.14/30;  
    }  
  }  
}  
user@R3# show protocols ospf
```



```
area 0.0.0.0 {
  interface fe-0/0/1.0;
}
area 0.0.0.3 {
  network-summary-export export-policy;
  interface fe-1/0/0.0;
  interface fe-1/1/0.0;
}

user@R3# show policy-options
policy-statement export-policy {
  term term1 {
    from {
      route-filter 10.0.4.12/30 prefix-length-range /30-/30;
    }
    then accept;
  }
}
```

Output for R4:

```
user@R4# show interfaces
fe-0/0/1 {
  unit 0 {
    family inet {
      address 10.0.2.4/30;
    }
  }
}
fe-1/0/0 {
  unit 0 {
    family inet {
      address 10.0.8.6/30;
    }
  }
}
fe-1/1/0 {
  unit 0 {
    family inet {
      address 10.0.8.3/30;
    }
  }
}

user@R4# show protocols ospf
area 0.0.0.0 {
  interface fe-0/0/1.0;
}
area 0.0.0.4 {
  interface fe-0/1/0.0;
  interface fe-1/0/0.0;
}
```

Output for R5:

```
user@R5# show interfaces
fe-1/1/0 {
  unit 0 {
```



```

        family inet {
            address 10.0.8.5/30;
        }
    }
}

user@R5# show protocols ospf
area 0.0.0.4 {
    interface fe-1/1/0.0;
}

```

Output for R6:

```

user@R6# show interfaces
fe-1/0/0 {
    unit 0 {
        family inet {
            address 10.0.8.7/30;
        }
    }
}

user@R6# show protocols ospf
area 0.0.0.4 {
    interface fe-1/0/0.0;
}

```

To confirm your OSPFv3 configuration, enter the **show interfaces**, **show policy-options**, and **show protocols ospf3** commands on the appropriate device.

### Verification

Confirm that the configuration is working properly.

- [Verifying the OSPF Database on page 3437](#)
- [Verifying the Routing Table on page 3437](#)

#### Verifying the OSPF Database

**Purpose** Verify that the OSPF database for the devices in area 4 includes the interarea route that we are advertising from R3. Any other routes from area 3 should not be advertised into area 4, so those entries should age out or no longer be present in the OSPF database.

**Action** From operational mode, enter the **show ospf database netsummary area 0.0.0.4** command for OSPFv2, and enter the **show ospf3 database netsummary area 0.0.0.4** command for OSPFv3.

#### Verifying the Routing Table

**Purpose** Verify that the specified route is included in R4's, R5's, or R6's routing table. Any other routes from area 3 should not be advertised into area 4.

**Action** From operational mode, enter the **show route protocol ospf** command for both OSPFv2 and OSPFv3.



- Related Documentation**
- [OSPF Overview on page 3282](#)
  - [OSPF Configuration Overview](#)
  - [Configuring Match Conditions in Routing Policy Terms in the Routing Policy Configuration Guide](#)
  - [Configuring Actions in Routing Policy Terms in the Routing Policy Configuration Guide](#)

---

## OSPF Monitoring Configuration

- [Example: Configuring OSPF Trace Options on page 3438](#)

### Example: Configuring OSPF Trace Options

- [Tracing OSPF Protocol Traffic on page 3438](#)
- [Example: Tracing OSPF Protocol Traffic on page 3439](#)

---

#### Tracing OSPF Protocol Traffic

Tracing operations record detailed messages about the operation of OSPF. You can trace OSPF protocol traffic to help debug OSPF protocol issues. When you trace OSPF protocol traffic, you specify the name of the file and the type of information you want to trace.

You can specify the following OSPF protocol-specific trace options:

- **database-description**—All database description packets, which are used in synchronizing the OSPF topological database
- **error**—OSPF error packets
- **event**—OSPF state transitions
- **flooding**—Link-state flooding packets
- **graceful-restart**—Graceful-restart events
- **hello**—Hello packets, which are used to establish neighbor adjacencies and to determine whether neighbors are reachable
- **ldp-synchronization**—Synchronization events between OSPF and LDP
- **lsa-ack**—Link-state acknowledgment packets, which are used in synchronizing the OSPF topological database
- **lsa-analysis**—Link-state analysis. Specific to the Juniper Networks implementation of OSPF, Junos OS performs LSA analysis before running the shortest-path-first (SPF) algorithm. LSA analysis helps to speed the calculations performed by the SPF algorithm.
- **lsa-request**—Link-state request packets, which are used in synchronizing the OSPF topological database
- **lsa-update**—Link-state updates packets, which are used in synchronizing the OSPF topological database
- **nsr-synchronization**—Nonstop routing synchronization events



- **on-demand**—Trace demand circuit extensions
- **packet-dump**—Dump the contents of selected packet types
- **packets**—All OSPF packets
- **restart-signaling**—(OSPFv2 only) Restart-signaling graceful restart events
- **spf**—Shortest path first (SPF) calculations

You can optionally specify one or more of the following flag modifiers:

- **detail**—Detailed trace information
- **receive**—Packets being received
- **send**—Packets being transmitted



**NOTE:** Use the **detail** flag modifier with caution as it might cause the CPU to become very busy.

Global tracing options are inherited from the configuration set by the **traceoptions** statement at the **[edit routing-options]** hierarchy level. You can override the following global trace options for the OSPF protocol using the **traceoptions flag** statement included at the **[edit protocols ospf]** hierarchy level:

- **all**—All tracing operations
- **general**—All normal operations and routing table changes (a combination of the normal and route trace operations)
- **normal**—Normal events
- **policy**—Policy processing
- **route**—Routing information
- **state**—State transitions
- **task**—Routing protocol task processing
- **timer**—Routing protocol timer processing



**NOTE:** Use the trace flag **all** with caution as it might cause the CPU to become very busy.

### Example: Tracing OSPF Protocol Traffic

This example shows how to trace OSPF protocol traffic.

- [Requirements on page 3440](#)
- [Overview on page 3440](#)



- [Configuration on page 3441](#)
- [Verification on page 3444](#)

### Requirements

This example assumes that OSPF is properly configured and running in your network, and you want to trace OSPF protocol traffic for debugging purposes.

### Overview

You can trace OSPF protocol traffic to help debug OSPF protocol issues. When you trace OSPF protocol traffic, you specify the name of the file and the type of information you want to trace. All files are placed in a directory on the routing device's hard disk. On M Series and T Series routers, trace files are stored in the /var/log directory.

This example shows a few configurations that might be useful when debugging OSPF protocol issues. The verification output displayed is specific to each configuration.



**TIP:** To keep track of your log files, create a meaningful and descriptive name so it is easy to remember the content of the trace file. We recommend that you place global routing protocol tracing output in the file `routing-log`, and OSPF tracing output in the file `ospf-log`.

In the first example, you globally enable tracing operations for all routing protocols that are actively running on your routing device to the file `routing-log`. With this configuration, you keep the default settings for the trace file size and the number of trace files. After enabling global tracing operations, you enable tracing operations to provide detailed information about OSPF packets, including link-state advertisements, requests, and updates, database description packets, and hello packets to the file `ospf-log`, and you configure the following options:

- **size**—Specifies the maximum size of each trace file, in KB, MB, or GB. In this example, you configure 10 KB as the maximum size. When the file reaches its maximum size, it is renamed with a .0 extension. When the file again reaches its maximum size, it is renamed with a .1 extension, and the newly created file is renamed with a .0 extension. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. If you specify a maximum file size, you must also specify a maximum number of trace files with the **files** option. You specify **k** for KB, **m** for MB, and **g** for GB. By default, the trace file size is 128 KB. The file size range is 10 KB through the maximum file size supported on your system.
- **files**—Specifies the maximum number of trace files. In this example, you configure a maximum of 5 trace files. When a trace file reaches its maximum size, it is renamed with a .0 extension, then a .1 extension, and so on until the maximum number of trace files is reached. When the maximum number of files is reached, the oldest trace file is overwritten. If you specify a maximum number of files, you must also specify a maximum file size with the **size** option. By default, there are 10 files. The range is 2 through 1000 files.



In the second example, you trace all SPF calculations to the file `ospf-log` by including the `spf` flag. You keep the default settings for the trace file size and the number of trace files.

In the third example, you trace the creation, receipt, and retransmission of all LSAs to the file `ospf-log` by including the `lsa-request`, `lsa-update`, and `lsa-ack` flags. You keep the default settings for the trace file size and the number of trace files.

### Configuration

- [Configuring Global Tracing Operations and Tracing OSPF Packet Information on page 3441](#)
- [Tracing SPF Calculations on page 3442](#)
- [Tracing Link-State Advertisements on page 3443](#)

### Configuring Global Tracing Operations and Tracing OSPF Packet Information

**CLI Quick Configuration** To quickly enable global tracing operations for all routing protocols actively running on your routing device and to trace detailed information about OSPF packets, copy the following commands and paste them into the CLI.

```
[edit]
set routing-options traceoptions file routing-log
set protocols ospf traceoptions file ospf-log
set protocols ospf traceoptions file files 5 size 10k
set protocols ospf traceoptions flag lsa-ack
set protocols ospf traceoptions flag database-description
set protocols ospf traceoptions flag hello
set protocols ospf traceoptions flag lsa-update
set protocols ospf traceoptions flag lsa-request
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Modifying the Junos OS Configuration in CLI User Guide*.

To configure global routing tracing operations and tracing operations for OSPF packets:

1. Configure tracing at the routing options level to collect information about the active routing protocols on your routing device.

```
[edit]
user@host# edit routing-options traceoptions
```

2. Configure the filename for the global trace file.

```
[edit routing-options traceoptions]
user@host# set file routing-log
```

3. Configure the filename for the OSPF trace file.



**NOTE:** To specify OSPFv3, include the `ospf3` statement at the `[edit protocols]` hierarchy level.

```
[edit]
```



```
user@host# edit protocols ospf traceoptions
user@host# set file ospf-log
```

4. Configure the maximum number of trace files.

```
[edit protocols ospf traceoptions]
user@host# set file files 5
```

5. Configure the maximum size of each trace file.

```
[edit protocols ospf traceoptions]
user@host# set file size 10k
```

6. Configure tracing flags.

```
[edit protocols ospf traceoptions]
user@host# set flag lsa-ack
user@host# set flag database-description
user@host# set flag hello
user@host# set flag lsa-update
user@host# set flag lsa-request
```

7. If you are done configuring the device, commit the configuration.

```
[edit protocols ospf traceoptions]
user@host# commit
```

**Results** Confirm your configuration by entering the **show routing-options** and the **show protocols ospf** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show routing-options
traceoptions {
  file routing-log;
}
```

```
user@host# show protocols ospf
traceoptions {
  file ospf-log size 10k files 5;
  flag lsa-ack;
  flag database-description;
  flag hello;
  flag lsa-update;
  flag lsa-request;
}
```

To confirm your OSPFv3 configuration, enter the **show routing-options** and the **show protocols ospf3** commands.

#### *Tracing SPF Calculations*

**CLI Quick Configuration** To quickly trace SPF calculations, copy the following commands and paste them into the CLI.

```
[edit]
set protocols ospf traceoptions file ospf-log
set protocols ospf traceoptions flag spf
```



**Step-by-Step Procedure** To configure SPF tracing operations for OSPF:

1. Configure the filename for the OSPF trace file.



**NOTE:** To specify OSPFv3, include the `ospf3` statement at the `[edit protocols]` hierarchy level.

```
[edit]
user@host# edit protocols ospf traceoptions
user@host# set file ospf-log
```

2. Configure the SPF tracing flag.

```
[edit protocols ospf traceoptions]
user@host# set flag spf
```

3. If you are done configuring the device, commit the configuration.

```
[edit protocols ospf traceoptions]
user@host# commit
```

**Results** Confirm your configuration by entering the `show protocols ospf` command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
traceoptions {
  file ospf-log ;
  flag spf;
}
```

To confirm your OSPFv3 configuration, enter the `show protocols ospf3` command.

### *Tracing Link-State Advertisements*

**CLI Quick Configuration** To quickly trace the creation, receipt, and retransmission of all LSAs, copy the following commands and paste them into the CLI.

```
[edit]
set protocols ospf traceoptions file ospf-log
set protocols ospf traceoptions flag lsa-request
set protocols ospf traceoptions flag lsa-update
set protocols ospf traceoptions flag lsa-ack
```

**Step-by-Step Procedure** To configure link-state advertisement tracing operations for OSPF:

1. Configure the filename for the OSPF trace file.



**NOTE:** To specify OSPFv3, include the `ospf3` statement at the `[edit protocols]` hierarchy level.



```
[edit]
user@host# edit protocols ospf traceoptions
user@host# set file ospf-log
```

2. Configure the link-state advertisement tracing flags.

```
[edit protocols ospf traceoptions]
user@host# set flag lsa-request
user@host# set flag lsa-update
user@host# set flag lsa-ack
```

3. If you are done configuring the device, commit the configuration.

```
[edit protocols ospf traceoptions]
user@host# commit
```

**Results** Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
traceoptions {
  file ospf-log;
  flag lsa-request;
  flag lsa-update;
  flag lsa-ack;
}
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.

### **Verification**

Confirm that the configuration is working properly.

### **Verifying Trace Operations**

**Purpose** Verify that the Trace options field displays the configured trace operations, and verify that the Trace file field displays the location on the routing device where the file is saved, the name of the file to receive the output of the tracing operation, and the size of the file.

**Action** From operational mode, enter the **show ospf overview extensive** command for OSPFv2, and enter the **show ospf3 overview extensive** command for OSPFv3.

**Related Documentation**

- [OSPF Overview on page 3282](#)
- OSPF Configuration Overview
- Junos OS Tracing and Logging Operations in the Junos OS System Basics Configuration Guide
- Example: Tracing Global Routing Protocol Operations in the Junos OS Routing Protocols Configuration Guide



## Configuration Statements

---



## area

**Syntax**

```

area area-id {
    interface interface-name {
        passive;
        topology (ipv4-multicast | name) {
            disable;
        }
    }
    virtual-link neighbor-id router-id transit-area area-id {
        topology (ipv4-multicast | name) {
            disable;
        }
    }
}

```

**Hierarchy Level**

```

[edit logical-systems logical-system-name protocols (ospf | ospf3)],
[edit logical-systems logical-system-name protocols ospf3 realm (ipv4-unicast |
  ipv4-multicast | ipv6-multicast)],
[edit logical-systems logical-system-name routing-instances routing-instance-name protocols
  (ospf | ospf3)],
[edit logical-systems logical-system-name routing-instances routing-instance-name protocols
  ospf3 realm (ipv4-unicast | ipv4-multicast | ipv6-multicast)],
[edit protocols (ospf | ospf3)],
[edit protocols ospf3 realm (ipv4-unicast | ipv4-multicast | ipv6-multicast)],
[edit routing-instances routing-instance-name protocols (ospf | ospf3)],
[edit routing-instances routing-instance-name protocols ospf3 realm (ipv4-unicast |
  ipv4-multicast | ipv6-multicast)]

```

**Release Information**

Statement introduced before Junos OS Release 7.4.

Statement introduced in Junos OS Release 9.0 for EX Series switches.

Support for the **realm** statement introduced in Junos OS Release 9.2.

Support for the **realm** statement introduced in Junos OS Release 9.2 for EX Series switches.

Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description**

Specify the area identifier for this routing device to use when participating in OSPF routing. All routing devices in an area must use the same area identifier to establish adjacencies.

Specify multiple **area** statements to configure the routing device as an area border router. An area border router does not automatically summarize routes between areas. Use the **area-range** statement to configure route summarization. By definition, an area border router must be connected to the backbone area either through a physical link or through a virtual link. To create a virtual link, include the **virtual-link** statement.

To specify that the routing device is directly connected to the OSPF backbone, include the **area 0.0.0.0** statement.

All routing devices on the backbone must be contiguous. If they are not, use the **virtual-link** statement to create the appearance of connectivity to the backbone.



You can also configure any interface that belongs to one or more topologies to advertise the direct interface addresses without actually running OSPF on that interface. By default, OSPF must be configured on an interface in order for direct interface addresses to be advertised as interior routes.



**NOTE:** If you configure an interface with the `passive` statement, it applies to all the topologies to which the interface belongs. You cannot configure an interface as passive for only one specific topology and have it remain active for any other topologies to which it belongs.

|                                 |                                                                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Options</b>                  | <b><i>area-id</i></b> —Area identifier. The identifier can be up to 32 bits. It is common to specify the area number as a simple integer or an IP address. Area number <b>0.0.0.0</b> is reserved for the OSPF backbone area. |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">OSPF Areas and Router Functionality Overview on page 3287</a></li> <li>• Understanding Multiple Address Families for OSPFv3</li> <li>• virtual-link</li> </ul>           |



## area-range

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <b>area-range</b> <i>network/mask-length</i> <exact> <override-metric <i>metric</i> > <restrict>;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols (ospf   ospf3) <b>area</b> <i>area-id</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols (ospf   ospf3) area <i>area-id</i> nssa],</p> <p>[edit logical-systems <i>logical-system-name</i> realm (ipv4-unicast   ipv4-multicast   ipv6-multicast) area <i>area-id</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols (ospf   ospf3) <b>area</b> <i>area-id</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols (ospf   ospf3) area <i>area-id</i> nssa],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> realm (ipv4-unicast   ipv4-multicast   ipv6-multicast) <b>area</b> <i>area-id</i>],</p> <p>[edit protocols (ospf   ospf3) <b>area</b> <i>area-id</i>],</p> <p>[edit protocols (ospf   ospf3) area <i>area-id</i> nssa],</p> <p>[edit protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast) <b>area</b> <i>area-id</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols (ospf   ospf3) <b>area</b> <i>area-id</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols (ospf   ospf3) area <i>area-id</i> nssa],</p> <p>[edit routing-instances <i>routing-instance-name</i> realm (ipv4-unicast   ipv4-multicast   ipv6-multicast) <b>area</b> <i>area-id</i>]</p> |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>         | <p>(Area border routers only) For an area, summarize a range of IP addresses when sending summary link advertisements (within an area). To summarize multiple ranges, include multiple <b>area-range</b> statements.</p> <p>For a not-so-stubby area (NSSA), summarize a range of IP addresses when sending NSSA link-state advertisements. The specified prefixes are used to aggregate external routes learned within the area when the routes are advertised to other areas. To specify multiple prefixes, include multiple <b>area-range</b> statements. All external routes learned within the area that do not fall into one of the prefixes are advertised individually to other areas.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Default</b>             | By default, area border routers do not summarize routes being sent from one area to other areas, but rather send all routes explicitly.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>             | <p><b>exact</b>—(Optional) Summarization of a route is advertised only when an exact match is made with the configured summary range.</p> <p><b>mask-length</b>—Number of significant bits in the network mask.</p> <p><b>network</b>—IP address. You can specify one or more IP addresses.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |



**override-metric *metric***—(Optional) Override the metric for the IP address range and configure a specific metric value.

**restrict**—(Optional) Do not advertise the configured summary. This hides all routes that are contained within the summary, effectively creating a route filter.

**Range:** 1 through 16,777,215

|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| <b>Required Privilege</b> | routing—To view this statement in the configuration.        |
| <b>Level</b>              | routing-control—To add this statement to the configuration. |

|                              |                                                                                                                                                        |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Example: Summarizing Ranges of Routes in OSPF Link-State Advertisements on page 3336</a></li></ul> |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|



## authentication (Protocols OSPF)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>authentication {<br/>  md5 key-identifier {<br/>    key key-value;<br/>    start-time YYYY-MM-DD.hh:mm;<br/>  }<br/>  simple-password key;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | <pre>[edit logical-systems <i>logical-system-name</i> protocols ospf area <i>area-id</i> <a href="#">interface</a><br/>  <i>interface-name</i>],<br/>[edit logical-systems <i>logical-system-name</i> protocols ospf area <i>area-id</i> virtual-link],<br/>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br/>  ospf area <i>area-id</i> <a href="#">interface</a> <i>interface-name</i>],<br/>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br/>  ospf area <i>area-id</i> virtual-link],<br/>[edit protocols ospf area <i>area-id</i> <a href="#">interface</a> <i>interface-name</i>],<br/>[edit protocols ospf area <i>area-id</i> virtual-link],<br/>[edit routing-instances <i>routing-instance-name</i> protocols ospf area <i>area-id</i> <a href="#">interface</a><br/>  <i>interface-name</i>],<br/>[edit routing-instances <i>routing-instance-name</i> protocols ospf area <i>area-id</i> virtual-link]</pre> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | <p>Configure an authentication key (password). Neighboring routers use the password to verify the authenticity of packets sent from this interface.</p> <p>All routers that are connected to the same IP subnet must use the same authentication scheme and password.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Understanding OSPFv2 Authentication</li><li>• Example: Configuring MD5 Authentication for OSPFv2 Exchanges</li><li>• Example: Configuring a Transition of MD5 Keys on an OSPFv2 Interface</li><li>• Example: Configuring Simple Authentication for OSPFv2 Exchanges</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |



## context-identifier (Protocols OSPF)

---

|                                 |                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | context-identifier <i>identifier</i>                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols (ospf   ospf3) <b>area</b> <i>area-id</i> ],<br>[edit protocols (ospf   ospf3) <b>area</b> <i>area-id</i> ]     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.4.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                        |
| <b>Description</b>              | Configure OSPF context-identifier information.                                                                                                                             |
| <b>Options</b>                  | <i>identifer</i> —IPv4 address that defines a protection pair. The context identifier is manually configured on both the primary and protector provider edge (PE) devices. |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show ospf context-identifier on page 3497</a></li> </ul>                                                              |



## bfd-liveness-detection (Protocols OSPF)

**Syntax**    `bfd-liveness-detection {`  
                   `authentication {`  
                     `algorithm algorithm-name;`  
                     `key-chain key-chain-name;`  
                     `loose-check;`  
                   `}`  
                   `detection-time {`  
                     `threshold milliseconds;`  
                   `}`  
                   `full-neighbors-only`  
                   `minimum-interval milliseconds;`  
                   `minimum-receive-interval milliseconds;`  
                   `multiplier number;`  
                   `no-adaptation;`  
                   `transmit-interval {`  
                     `minimum-interval milliseconds;`  
                     `threshold milliseconds;`  
                   `}`  
                   `version (1 | automatic);`  
                   `}`

**Hierarchy Level**    `[edit logical-systems logical-system-name protocols (ospf | ospf3) area area-id interface interface-name],`  
                           `[edit logical-systems logical-system-name protocols ospf3 realm (ipv4-unicast |`  
                             `ipv4-multicast | ipv6-multicast) area area-id interface interface-name],`  
                           `[edit logical-systems logical-system-name routing-instances routing-instance-name protocols`  
                             `(ospf | ospf3) area area-id interface interface-name],`  
                           `[edit logical-systems logical-system-name routing-instances routing-instance-name protocols`  
                             `ospf3 realm (ipv4-unicast | ipv4-multicast | ipv6-multicast) area area-id interface`  
                             `interface-name],`  
                           `[edit protocols (ospf | ospf3) area area-id interface interface-name],`  
                           `[edit protocols ospf3 realm (ipv4-unicast | ipv4-multicast | ipv6-multicast) area area-id`  
                             `interface interface-name],`  
                           `[edit routing-instances routing-instance-name protocols (ospf | ospf3) area area-id interface`  
                             `interface-name],`  
                           `[edit routing-instances routing-instance-name protocols ospf3 realm (ipv4-unicast |`  
                             `ipv4-multicast | ipv6-multicast) area area-id interface interface-name]`

**Release Information**    Statement introduced before Junos OS Release 7.4.  
                               Statement introduced in Junos OS Release 9.0 for EX Series switches.  
                               **detection-time threshold** and **transmit-interval threshold** options added in Junos OS Release 8.2.  
                               Support for logical systems introduced in Junos OS Release 8.3.  
                               **no-adaptation** option introduced in Junos OS Release 9.0.  
                               **no-adaptation** option introduced in Junos OS Release 9.0 for EX Series switches.  
                               Support for OSPFv3 introduced in Junos OS Release 9.3.  
                               Support for OSPFv3 introduced in Junos OS Release 9.3 for EX Series switches.  
                               **full-neighbors-only** option introduced in Junos OS Release 9.5.  
                               **full-neighbors-only** option introduced in Junos OS Release 9.5 for EX Series switches.



**authentication algorithm**, **authentication key-chain**, and **authentication loose-check** options introduced in Junos OS Release 9.6.

Statement introduced in Junos OS Release 12.1 for the QFX Series.

**Description** Configure bidirectional failure detection timers and authentication for OSPF.

The remaining statements are explained separately.



**Options**    **authentication algorithm** *algorithm-name* —Configure the algorithm used to authenticate the specified BFD session: **simple-password**, **keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, or **meticulous-keyed-sha-1**.

**authentication key-chain** *key-chain-name* —Associate a security key with the specified BFD session using the name of the security keychain. The name you specify must match one of the keychains configured in the **authentication-key-chains key-chain** statement at the **[edit security]** hierarchy level.

**authentication loose-check**—(Optional) Configure loose authentication checking on the BFD session. Use only for transitional periods when authentication may not be configured at both ends of the BFD session.

**detection-time threshold** *milliseconds*—Configure a threshold for the adaptation of the BFD session detection time. When the detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.

**full-neighbors-only**—Establish BFD sessions only for OSPF neighbors in the full state. The default behavior is to establish BFD sessions for all OSPF neighbors.

**minimum-interval** *milliseconds*—Configure the minimum interval after which the local routing device transmits a hello packet and then expects to receive a reply from the neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum transmit and receive intervals separately using the **transmit-interval minimum-interval** and **minimum-receive-interval** statements.

**Range:** 1 through 255,000 milliseconds

**minimum-receive-interval** *milliseconds*—Configure the minimum interval after which the routing device expects to receive a reply from a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum receive interval using the **minimum-interval** statement.

**Range:** 1 through 255,000 milliseconds

**multiplier** *number*—Configure the number of hello packets not received by a neighbor that causes the originating interface to be declared down.

**Range:** 1 through 255

**Default:** 3

**no-adaptation**—Specify that BFD sessions should not adapt to changing network conditions. We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation enabled in your network.

**transmit-interval threshold** *milliseconds*—Configure the threshold for the adaptation of the BFD session transmit interval. When the transmit interval adapts to a value greater than the threshold, a single trap and a single system message are sent. The interval threshold must be greater than the minimum transmit interval.

**Range:** 0 through 4,294,967,295 ( $2^{32} - 1$ )

**transmit-interval minimum-interval** *milliseconds*—Configure the minimum interval at which the routing device transmits hello packets to a neighbor with which it has established



a BFD session. Optionally, instead of using this statement, you can configure the minimum transmit interval using the **minimum-interval** statement.

**Range:** 1 through 255,000

**version**—Configure the BFD version to detect: **1** (BFD version 1) or **automatic** (autodetect the BFD version).

**Default:** **automatic**

|                                 |                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration. |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|

|                              |                                                                                                                                                                                                          |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring BFD for OSPF on page 3367</a></li><li>• <a href="#">Example: Configuring BFD Authentication for OSPF on page 3371</a></li></ul> |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



## database-protection

---

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>database-protection {<br/>    ignore-count <i>number</i>;<br/>    ignore-time <i>seconds</i>;<br/>    maximum-lsa <i>number</i>;<br/>    reset-time <i>seconds</i>;<br/>    warning-only;<br/>    warning-threshold <i>percent</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>     | <pre>[edit protocols (<b>ospf</b>   ospf3)],<br/>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br/>  (<b>ospf</b>   ospf3)],<br/>[edit routing-instances <i>routing-instance-name</i> protocols (<b>ospf</b>   ospf3)],<br/>[edit routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast  <br/>  ipv4-multicast   ipv6-unicast   ipv6-multicast)]</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b> | Statement introduced in Junos OS Release 10.2.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>         | Configure the maximum number of link-state advertisements (LSAs) that are not generated by the router or switch in a given OSPF instance.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Default</b>             | By default, OSPF database protection is not enabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>             | <p><b>ignore-count <i>number</i></b>—Configure the number of times the database can enter the ignore state. When the ignore count is exceeded, the database enters the isolate state.<br/><b>Range:</b> 1 through 32<br/><b>Default:</b> 5</p> <p><b>ignore-time <i>seconds</i></b>—Configure the time the database must remain in the ignore state before it resumes regular operations (enters retry state).<br/><b>Range:</b> 30 through 3,600 seconds<br/><b>Default:</b> 300 seconds</p> <p><b>maximum-lsa <i>number</i></b>—Configure the maximum number of LSAs whose advertising router ID is different from the local router ID in a given OSPF instance. This includes external LSAs as well as LSAs with any scope, such as the link, area, and autonomous system (AS). This value is mandatory.<br/><b>Range:</b> 1 through 1,000,000<br/><b>Default:</b> None</p> <p><b>reset-time <i>seconds</i></b>—Configure the time period during which the database must operate without being in the ignore or isolate state before it is reset to a normal operating state.<br/><b>Range:</b> 60 through 86,400 seconds<br/><b>Default:</b> 600 seconds</p> |



**warning-only**—Specify that only a warning should be issued when the maximum LSA number is exceeded. If configured, no other action is taken against the database.

**warning-threshold *percent***—Configure the percentage of the maximum number of LSAs to be exceeded before a warning message is logged.

**Range:** 30 through 100 percent

**Default:** 75 percent

|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| <b>Required Privilege</b> | routing—To view this statement in the configuration.        |
| <b>Level</b>              | routing-control—To add this statement to the configuration. |

|                              |                                                                                                                                                                                              |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">OSPF Database Protection Overview on page 3403</a></li><li>• <a href="#">Configuring OSPF Database Protection on page 3404</a></li></ul> |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



## disable (OSPF)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | disable;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols (<b>ospf</b>   ospf3)],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols (ospf   ospf3) <b>area</b> <i>area-id</i> <b>interface</b> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols ospf <b>area</b> <i>area-id</i> <b>peer-interface</b> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols (ospf   ospf3) virtual-link],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast) <b>area</b> <i>area-id</i> <b>interface</b> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols (<b>ospf</b>   ospf3)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols (ospf   ospf3) <b>area</b> <i>area-id</i> <b>interface</b> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols (ospf   ospf3) virtual-link],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instances</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast) <b>area</b> <i>area-id</i> <b>interface</b> <i>interface-name</i>],</p> <p>[edit protocols (<b>ospf</b>   ospf3)],</p> <p>[edit protocols (ospf   ospf3) <b>area</b> <i>area-id</i> <b>interface</b> <i>interface-name</i>],</p> <p>[edit protocols (ospf   ospf3) virtual-link],</p> <p>[edit protocols ospf <b>area</b> <i>area-id</i> <b>peer-interface</b> <i>interface-name</i>],</p> <p>[edit protocols ospf <b>area</b> <i>area-id</i> virtual-link neighbor-id <i>router-id</i> transit-area <i>area-id</i>],</p> <p>[edit protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast) <b>area</b> <i>area-id</i> <b>interface</b> <i>interface-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols (<b>ospf</b>   ospf3)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols (ospf   ospf3) <b>area</b> <i>area-id</i> <b>interface</b> <i>interface-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols (ospf   ospf3) virtual-link],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast) <b>area</b> <i>area-id</i> <b>interface</b> <i>interface-name</i>]</p> |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>         | <p>Disable OSPF, an OSPF interface, or an OSPF virtual link.</p> <p>By default, control packets sent to the remote end of a virtual link must be forwarded using the default topology. In addition, the transit area path consists only of links that</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |



are in the default topology. You can disable a virtual link for a configured topology, but not for a default topology. Include the **disable** statement at the **[edit protocols ospf area *area-id* virtual-link neighbor-id *router-id* transit-area *area-id* topology *name*]** hierarchy level.



**NOTE:** If you disable the virtual link by including the **disable** statement at the **[edit protocols ospf area *area-id* virtual-link neighbor-id *router-id* transit-area *area-id*]** hierarchy level, you disable the virtual link for all topologies, including the default topology. You cannot disable the virtual link only in the default topology.

|                                 |                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Default</b>                  | The configured object is enabled (operational) unless explicitly disabled.                                                                   |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• OSPF Configuration Overview</li> <li>• Configuring RSVP and OSPF for LMP Peer Interfaces</li> </ul> |



## export (Protocols OSPF)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>export [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols (<a href="#">ospf</a>   ospf3)],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols (<a href="#">ospf</a>   ospf3)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit protocols (<a href="#">ospf</a>   ospf3)],</p> <p>[edit protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols (<a href="#">ospf</a>   ospf3)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Apply one or more policies to routes being exported from the routing table into OSPF.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more policies.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Understanding OSPF Routing Policy on page 3405</a></li><li>• <a href="#">Import and Export Policies for Network Summaries Overview on page 3421</a></li><li>• <a href="#">import on page 3464</a></li><li>• Routing Policy Configuration Guide</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |



## external-preference (Protocols OSPF)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>external-preference <i>preference</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols (<a href="#">ospf</a>   ospf3)],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols (<a href="#">ospf</a>   ospf3)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit protocols (<a href="#">ospf</a>   ospf3)],</p> <p>[edit protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols (<a href="#">ospf</a>   ospf3)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Set the route preference for OSPF external routes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <p><b><i>preference</i></b>—Preference value.</p> <p><b>Range:</b> 0 through 4,294,967,295 (<math>2^{32} - 1</math>)</p> <p><b>Default:</b> 150</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Controlling OSPF Route Preferences on page 3353</a></li> <li>• <a href="#">preference on page 3471</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |



## graceful-restart (Protocols OSPF)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> graceful-restart {   disable;   helper-disable (standard   restart-signaling   both);   no-strict-lsa-checking;   notify-duration <i>seconds</i>;   restart-duration <i>seconds</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>     | <pre> [edit logical-systems <i>logical-system-name</i> protocols (<b>ospf</b>   ospf3)], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols (<b>ospf</b>   ospf3)], [edit protocols (<b>ospf</b>   ospf3)], [edit routing-instances <i>routing-instance-name</i> protocols ospf]</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Support for the <b>no-strict-lsa-checking</b> statement introduced in Junos OS Release 8.5.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the helper mode <b>standard</b>, <b>restart-signaling</b>, and <b>both</b> options introduced in Junos OS Release 11.4.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>         | <p>Configure graceful restart for OSPF.</p> <p>Graceful restart allows a routing device to restart with minimal effects to the network, and is enabled for all routing protocols at the <b>[edit routing-options]</b> hierarchy level.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>             | <p><b>disable</b>—Disable graceful restart for OSPF.</p> <p><b>helper-disable (standard   restart-signaling   both)</b>—Disable helper mode for graceful restart. When helper mode is disabled, a device cannot help a neighboring device that is attempting to restart. Beginning with Junos OS Release 11.4, you can configure restart signaling-based helper mode for OSPFv2 graceful restart configurations. The <b>standard</b>, <b>restart-signaling</b>, and <b>both</b> options are only supported for OSPFv2. Specify <b>standard</b> to disable helper mode for standard graceful restart (based on RFC 3623). Specify <b>restart-signaling</b> to disable helper mode for restart signaling-based graceful restart (based on RFC 4811, RFC 4812, and RFC 4813). Specify <b>both</b> to disable helper mode for both standard and restart signaling-based graceful restart. The last committed statement takes precedence over the previously configured statement.</p> <p><b>Default:</b> Helper mode is enabled by default. For OSPFv2, both standard and restart-signaling based helper modes are enabled by default.</p> <p><b>no-strict-lsa-checking</b>—Disable strict OSPF link-state advertisement (LSA) checking to prevent the termination of graceful restart by a helping router. LSA checking is enabled by default.</p> |



**NOTE:** The **helper-disable** statement and the **no-strict-lsa-checking** statement cannot be configured at the same time. If you attempt to configure both



statements at the same time, the routing device displays a warning message when you enter the `show protocols (ospf | ospf3)` command.

**notify-duration seconds**—Estimated time needed to send out purged grace LSAs over all the interfaces.

**Range:** 1 through 3600 seconds

**Default:** 30 seconds

**restart-duration seconds**—Estimated time needed to reacquire a full OSPF neighbor from each area.

**Range:** 1 through 3600 seconds

**Default:** 180 seconds

|                                 |                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration. |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Graceful Restart for OSPF on page 3378</a></li> <li>• <a href="#">Example: Configuring the Helper Capability Mode for OSPFv2 Graceful Restart on page 3382</a></li> <li>• <a href="#">Example: Configuring the Helper Capability Mode for OSPFv3 Graceful Restart on page 3386</a></li> <li>• <a href="#">Example: Disabling Strict LSA Checking for OSPF Graceful Restart on page 3389</a></li> <li>• <a href="#">Configuring Graceful Restart for QFabric Systems on page 1777</a></li> <li>• <a href="#">Junos OS High Availability Configuration Guide</a></li> </ul> |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



## import (Protocols OSPF)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>import [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> protocols (<a href="#">ospf</a>   ospf3)],</code><br><code>[edit logical-systems <i>logical-system-name</i> protocols ospf3 realm (ipv4-unicast  </code><br><code>  ipv4-multicast   ipv6-multicast)],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code><br><code>  (<a href="#">ospf</a>   ospf3)],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code><br><code>  ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</code><br><code>[edit protocols (<a href="#">ospf</a>   ospf3)],</code><br><code>[edit protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols (<a href="#">ospf</a>   ospf3)],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast  </code><br><code>  ipv4-multicast   ipv6-multicast)]</code> |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2.<br>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Filter OSPF routes from being added to the routing table.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more policies.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Understanding OSPF Routing Policy on page 3405</a></li><li>• <a href="#">Import and Export Policies for Network Summaries Overview on page 3421</a></li><li>• <a href="#">export on page 3460</a></li><li>• Routing Policy Configuration Guide</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |



## interface (Protocols OSPF)

**Syntax** `interface interface-name {`  
     `disable;`  
     `authentication key <key-id identifier>;`  
     `bfd-liveness-detection {`  
         `authentication {`  
             `algorithm algorithm-name;`  
             `key-chain key-chain-name;`  
             `loose-check;`  
         `}`  
         `detection-time {`  
             `threshold milliseconds;`  
         `}`  
         `minimum-interval milliseconds;`  
         `minimum-receive-interval milliseconds;`  
         `transmit-interval {`  
             `threshold milliseconds;`  
             `minimum-interval milliseconds;`  
         `}`  
         `multiplier number;`  
     `}`  
     `dead-interval seconds;`  
     `demand-circuit;`  
     `hello-interval seconds;`  
     `ipsec-sa name;`  
     `interface-type type;`  
     `ldp-synchronization {`  
         `disable;`  
         `hold-time seconds;`  
     `}`  
     `metric metric;`  
     `neighbor address <eligible>;`  
     `no-interface-state-traps;`  
     `passive;`  
     `poll-interval seconds;`  
     `priority number;`  
     `retransmit-interval seconds;`  
     `te-metric metric;`  
     `topology (ipv4-multicast | name) {`  
         `metric metric;`  
     `}`  
     `transit-delay seconds;`  
     `transmit-interval seconds;`  
`}`

**Hierarchy Level** [edit logical-systems *logical-system-name* protocols (ospf | ospf3) *area area-id*],  
 [edit logical-systems *logical-system-name* protocols ospf3 realm (ipv4-unicast |  
 ipv4-multicast | ipv6-multicast) *area area-id*],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols  
 (ospf | ospf3) *area area-id*],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols  
 ospf3 realm (ipv4-unicast | ipv4-multicast | ipv6-multicast) *area area-id*],  
 [edit protocols (ospf | ospf3) *area area-id*],



```
[edit protocols ospf3 realm (ipv4-unicast | ipv4-multicast | ipv6-multicast) area area-id],  
[edit routing-instances routing-instance-name protocols (ospf | ospf3) area area-id],  
[edit routing-instances routing-instance-name protocols ospf3 realm (ipv4-unicast |  
  ipv4-multicast | ipv6-multicast) area area-id]
```

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Support for the **topology** statement introduced in Junos OS Release 9.0.  
Support for the **topology** statement introduced in Junos OS Release 9.0 for EX Series switches.  
Support for the **realm** statement introduced in Junos OS Release 9.2.  
Support for the **realm** statement introduced in Junos OS Release 9.2 for EX Series switches.  
Support for the **no-interface-state-traps** statement introduced in Junos OS Release 10.3.  
This statement is supported only for OSPFv2.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Enable OSPF routing on a routing device interface.

You must include at least one **interface** statement in the configuration to enable OSPF on the routing device.

**Options** **interface-name**—Name of the interface. Specify the interface by IP address or interface name for OSPFv2, or only the interface name for OSPFv3. Using both the interface name and IP address of the same interface produces an invalid configuration. To configure all interfaces, you can specify **all**. Specifying a particular interface and **all** produces an invalid configuration.



.....  
**NOTE:** For nonbroadcast interfaces, specify the IP address of the nonbroadcast interface as **interface-name**.  
.....

The remaining statements are explained separately.



.....  
**NOTE:** You cannot run both OSPF and **ethernet-tcc** encapsulation between two Juniper Networks routing devices.  
.....

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.



- Related Documentation**
- OSPF Configuration Overview
  - Example: Configuring Multitopology Routing Based on Applications
  - Example: Configuring Multitopology Routing Based on a Multicast Source
  - Example: Configuring Multiple Address Families for OSPFv3
  - neighbor

## no-nssa-abr

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-nssa-abr;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols ( <a href="#">ospf</a>   ospf3)],<br>[edit logical-systems <i>logical-system-name</i> protocols ospf3 realm (ipv4-unicast  <br>ipv4-multicast   ipv6-multicast)],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>( <a href="#">ospf</a>   ospf3)],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],<br>[edit protocols ( <a href="#">ospf</a>   ospf3)],<br>[edit protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],<br>[edit routing-instances <i>routing-instance-name</i> protocols ( <a href="#">ospf</a>   ospf3)],<br>[edit routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast  <br>ipv4-multicast   ipv6-multicast)] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.6.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2.<br>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Disable exporting Type 7 link-state advertisements into not-so-stubby-areas (NSSAs) for an autonomous system boundary router (ASBR) or an area border router (ABR).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | • <a href="#">Example: Configuring OSPF Not-So-Stubby Areas on page 3310</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |



## no-rfc-1583

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-rfc-1583;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols ( <b>ospf</b>   ospf3)],<br>[edit logical-systems <i>logical-system-name</i> protocols ospf3 realm (ipv4-unicast  <br>ipv4-multicast   ipv6-multicast)],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>( <b>ospf</b>   ospf3)],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],<br>[edit protocols ( <b>ospf</b>   ospf3)],<br>[edit protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],<br>[edit routing-instances <i>routing-instance-name</i> protocols ( <b>ospf</b>   ospf3)],<br>[edit routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast  <br>ipv4-multicast   ipv6-multicast)] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.5.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2.<br>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Disable compatibility with RFC 1583, <i>OSPF Version 2</i> . If the same external destination is advertised by AS boundary routers that belong to different OSPF areas, disabling compatibility with RFC 1583 can prevent routing loops.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Default</b>                  | Compatibility with RFC 1583 is enabled by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control-level—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Disabling OSPFv2 Compatibility with RFC 1583 on page 3320</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |




## ospf

---

|                                 |                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ospf { ... }</code>                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols],<br>[edit protocols],<br>[edit routing-instances <i>routing-instance-name</i> protocols] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                      |
| <b>Description</b>              | Enable OSPF routing on the routing device.<br><br>You must include the <b>ospf</b> statement to enable OSPF on the routing device.                                                                                                                                  |
| <b>Default</b>                  | OSPF is disabled on the routing device.                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• OSPF Configuration Overview</li> <li>• [edit protocols ospf] Hierarchy Level</li> </ul>                                                                                                                                    |



## overload (Protocols OSPF)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>overload {     timeout <i>seconds</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols (<b>ospf</b>   ospf3)],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols ospf <b>topology</b> (default   ipv4-multicast   <i>name</i>)],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols (<b>ospf</b>   ospf3)],</p> <p>[edit logical systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols ospf <b>topology</b> (default   ipv4-multicast   <i>name</i>)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit protocols (<b>ospf</b>   ospf3)],</p> <p>[edit protocols ospf <b>topology</b> (default   ipv4-multicast   <i>name</i>)],</p> <p>[edit protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols (<b>ospf</b>   ospf3)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols ospf <b>topology</b> (default   ipv4-multicast   <i>name</i>)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for Multitopology Routing introduced in Junos OS Release 9.0.</p> <p>Support for Multitopology Routing introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>         | <p>Configure the local routing device so that it appears to be overloaded. You might do this when you want the routing device to participate in OSPF routing, but do not want it to be used for transit traffic.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                            | <div>  <p><b>NOTE:</b> Traffic destined to directly attached interfaces continues to reach the routing device.</p> </div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Options</b>             | <p><b>timeout <i>seconds</i></b>—(Optional) Number of seconds at which the overloading is reset. If no timeout interval is specified, the routing device remains in overload state until the <b>overload</b> statement is deleted or a timeout is set.</p> <p><b>Range:</b> 60 through 1800 seconds</p> <p><b>Default:</b> 0 seconds</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |





**NOTE:** Multitopology Routing does not support the timeout option.

|                                 |                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring OSPF to Make Routing Devices Appear Overloaded on page 3356</a></li> <li>• Example: Configuring Multitopology Routing Based on Applications</li> <li>• Example: Configuring Multitopology Routing Based on a Multicast Source</li> </ul> |

## preference (Protocols OSPF)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>preference <i>preference</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols (<a href="#">ospf</a>   ospf3)],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols (<a href="#">ospf</a>   ospf3)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit protocols (<a href="#">ospf</a>   ospf3)],</p> <p>[edit protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols (<a href="#">ospf</a>   ospf3)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Set the route preference for OSPF internal routes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <p><b><i>preference</i></b>—Preference value.</p> <p><b>Range:</b> 0 through 4,294,967,295 (<math>2^{32} - 1</math>)</p> <p><b>Default:</b> 10</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Controlling OSPF Route Preferences on page 3353</a></li> <li>• <a href="#">external-preference on page 3461</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |




## prefix-export-limit (Protocols OSPF)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>prefix-export-limit <i>number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols (<b>ospf</b>   ospf3)],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols ospf <b>topology</b> (default   ipv4-multicast   <i>name</i>)],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols (<b>ospf</b>   ospf3)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols ospf <b>topology</b> (default   ipv4-multicast   <i>name</i>)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit protocols (<b>ospf</b>   ospf3)],</p> <p>[edit protocols ospf <b>topology</b> (default   ipv4-multicast   <i>name</i>)],</p> <p>[edit protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols (<b>ospf</b>   ospf3)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols ospf <b>topology</b> (default   ipv4-multicast   <i>name</i>)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for Multitopology Routing introduced in Junos OS Release 9.0.</p> <p>Support for Multitopology Routing introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | Configure a limit to the number of prefixes exported into OSPF.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b><i>number</i></b>—Prefix limit.</p> <p><b>Range:</b> 0 through 4,294,967,295 (<math>2^{32} - 1</math>)</p> <p><b>Default:</b> None</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Limiting the Number of Prefixes Exported to OSPF on page 3342</a></li> <li>• <a href="#">Example: Configuring Multitopology Routing Based on Applications</a></li> <li>• <a href="#">Example: Configuring Multitopology Routing Based on a Multicast Source</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |



## reference-bandwidth (Protocols OSPF)

|                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                               | <code>reference-bandwidth <i>reference-bandwidth</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                                      | <p>[edit logical-systems <i>logical-system-name</i> protocols (<b>ospf</b>   ospf3)],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols (<b>ospf</b>   ospf3)],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit protocols (<b>ospf</b>   ospf3)],</p> <p>[edit protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols (<b>ospf</b>   ospf3)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)]</p> |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                                  | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                          | <p>Set the reference bandwidth used in calculating the default interface cost. The cost is calculated using the following formula:</p> $\text{cost} = \text{ref-bandwidth} / \text{bandwidth}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                                                                                                                                                                                                                                                                                                                              | <p><b><i>reference-bandwidth</i></b>—Reference bandwidth, in bits per second.</p> <p><b>Range:</b> 9600 through 1,000,000,000,000 bits</p> <p><b>Default:</b> 100 Mbps (100,000,000 bits)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <div>  <p><b>NOTE:</b> The default behavior is to use the reference-bandwidth value to calculate the cost of OSPF interfaces. You can override this behavior for any OSPF interface by configuring a specific cost with the metric statement.</p> </div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                             | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                                                | <ul style="list-style-type: none"> <li>• <a href="#">Example: Controlling the Cost of Individual OSPF Network Segments on page 3347</a></li> <li>• <a href="#">metric</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |



## rib-group (Protocols OSPF)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>rib-group group-name;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems logical-system-name protocols (<a href="#">ospf</a>   ospf3)],</code><br><code>[edit logical-systems logical-system-name protocols ospf3 realm (ipv4-unicast  </code><br><code>  ipv4-multicast   ipv6-multicast)],</code><br><code>[edit logical-systems logical-system-name routing-instances routing-instance-name protocols</code><br><code>  (<a href="#">ospf</a>   ospf3)],</code><br><code>[edit logical-systems logical-system-name routing-instances routing-instance-name protocols</code><br><code>  ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</code><br><code>[edit protocols (<a href="#">ospf</a>   ospf3)],</code><br><code>[edit protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)],</code><br><code>[edit routing-instances routing-instance-name protocols (<a href="#">ospf</a>   ospf3)],</code><br><code>[edit routing-instances routing-instance-name protocols ospf3 realm (ipv4-unicast  </code><br><code>  ipv4-multicast   ipv6-multicast)]</code> |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2.<br>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | Install routes learned from OSPF routing instances into routing tables in the OSPF routing table group.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <b>group-name</b> —Name of the routing table group.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | <b>routing</b> —To view this statement in the configuration.<br><b>routing-control</b> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Example: Exporting Specific Routes from One Routing Table Into Another Routing Table</li><li>• Example: Importing Direct and Static Routes Into a Routing Instance</li><li>• Understanding Multiprotocol BGP</li><li>• <a href="#">interface-routes on page 2390</a></li><li>• <a href="#">rib-group on page 2427</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |



## topology (OSPF)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> topology (default   ipv4-multicast   <i>name</i>) {     spf-options {         delay <i>milliseconds</i>;         holddown <i>milliseconds</i>;         rapid-runs <i>number</i>;     }     topology-id <i>number</i>; } </pre>                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <b>ospf</b>],<br/> [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>ospf</b>],<br/> [edit protocols <b>ospf</b>],<br/> [edit routing-instances <i>routing-instance-name</i> protocols <b>ospf</b>]</p>                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 9.0.<br/> Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | <p>Enable a topology for OSPF multitenancy routing. You must first configure one or more topologies under the <b>[edit routing-options]</b> hierarchy level.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <p><b>default</b>—Name of the default topology. This topology is automatically created, and all routes that correspond to it are automatically added to the <b>inet.0</b> routing table. You can modify certain default parameters, such as for the SPF algorithm.</p> <p><b>ipv4-multicast</b>—Name of the topology for IPv4 multicast traffic.</p> <p><b><i>name</i></b>—Name of a topology you configured at the <b>[edit routing-options]</b> hierarchy level to create a topology for a specific type of traffic, such as voice or video.</p> <p>The remaining statements are explained separately.</p> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.<br/> routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• Example: Configuring Multitenancy Routing Based on Applications</li> <li>• Example: Configuring Multitenancy Routing Based on a Multicast Source</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                         |



## traceoptions (Protocols OSPF)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>traceoptions {     file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i> &lt;flag-modifier&gt; &lt;disable&gt;; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>     | <pre>[edit logical-systems <i>logical-system-name</i> protocols (<b>ospf</b>   ospf3)], [edit logical-systems <i>logical-system-name</i> protocols ospf3 realm (ipv4-unicast     ipv4-multicast   ipv6-multicast)], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   (<b>ospf</b>   ospf3)], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)], [edit protocols (<b>ospf</b>   ospf3)], [edit protocols ospf3 realm (ipv4-unicast   ipv4-multicast   ipv6-multicast)], [edit routing-instances <i>routing-instance-name</i> protocols (<b>ospf</b>   ospf3)], [edit routing-instances <i>routing-instance-name</i> protocols ospf3 realm (ipv4-unicast     ipv4-multicast   ipv6-multicast)]</pre> |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2.</p> <p>Support for the <b>realm</b> statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>         | <p>Configure OSPF protocol-level tracing options.</p> <p>To specify more than one tracing operation, include multiple <b>flag</b> statements.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |



**NOTE:** The **traceoptions** statement is not supported on QFabric systems.

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Default</b> | The default OSPF protocol-level tracing options are those inherited from the routing protocols <b>traceoptions</b> statement included at the <b>[edit routing-options]</b> hierarchy level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b> | <p><b>disable</b>—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as <b>all</b>.</p> <p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory <b>/var/log</b>. We recommend that you place OSPF tracing output in the file <b>ospf-log</b>.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file named <b>trace-file</b> reaches its maximum size, it is renamed <b>trace-file.0</b>, then <b>trace-file.1</b>, and so on, until the maximum number of trace files is reached. Then, the oldest trace file is overwritten.</p> |



If you specify a maximum number of files, you also must specify a maximum file size with the **size** option.

**Range:** 2 through 1000 files

**Default:** 10 files

**flag *flag***—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements.

#### OSPF Tracing Flags

- **database-description**—Database description packets, which are used in synchronizing the OSPF and OSPFv3 topological database.
- **error**—OSPF and OSPFv3 error packets.
- **event**—OSPF and OSPFv3 state transitions.
- **flooding**—Link-state flooding packets.
- **graceful-restart**—Graceful-restart events.
- **hello**—Hello packets, which are used to establish neighbor adjacencies and to determine whether neighbors are reachable.
- **ldp-synchronization**—Synchronization events between OSPF and LDP.
- **lsa-ack**—Link-state acknowledgment packets, which are used in synchronizing the OSPF topological database.
- **lsa-analysis**—Link-state analysis. Specific to the Juniper Networks implementation of OSPF, Junos OS performs LSA analysis before running the shortest-path-first (SPF) algorithm. LSA analysis helps to speed the calculations performed by the SPF algorithm.
- **lsa-request**—Link-state request packets, which are used in synchronizing the OSPF topological database.
- **lsa-update**—Link-state updates packets, which are used in synchronizing the OSPF topological database.
- **nsr-synchronization**—Nonstop routing synchronization events.
- **on-demand**—Trace demand circuit extensions.
- **packet-dump**—Content of selected packet types.
- **packets**—All OSPF packets.
- **restart-signaling**—(OSPFv2 only) Restart-signaling graceful restart events.
- **spf**—Shortest-path-first (SPF) calculations.

#### Global Tracing Flags



- **all**—All tracing operations.
- **general**—A combination of the **normal** and **route** trace operations.
- **normal**—All normal operations. If you do not specify this option, only unusual or abnormal operations are traced.
- **policy**—Policy operations and actions.
- **route**—Routing table changes.
- **state**—State transitions.
- **task**—Routing protocol task processing.
- **timer**—Routing protocol timer processing.

**flag-modifier**—(Optional) Modifier for the tracing flag. You can specify one or more of these modifiers:

- **detail**—Detailed trace information.
- **receive**—Packets being received.
- **send**—Packets being transmitted.

**no-world-readable**—(Optional) Prevent any user from reading the log file.

**size size**—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches this size, it is renamed **trace-file.0**. When the **trace-file** again reaches its maximum size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten.

If you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

**Syntax:** **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

**Range:** 10 KB through the maximum file size supported on your system

**Default:** 128 KB

**world-readable**—(Optional) Allow any user to read the log file.

|                                 |                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing and trace—To view this statement in the configuration.<br>routing-control and trace-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Tracing OSPF Protocol Traffic on page 3439</a></li></ul>                           |



## traffic-engineering (OSPF)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> traffic-engineering {   &lt;advertise-unnumbered-interfaces&gt;;   &lt;credibility-protocol-preference&gt;;   ignore-lsp-metrics;   multicast-rpf-routes;   no-topology;   shortcuts {     lsp-metric-into-summary;   } } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols (<a href="#">ospf</a>   ospf3)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols (<a href="#">ospf</a>   ospf3)],</p> <p>[edit protocols (<a href="#">ospf</a>   ospf3)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols (<a href="#">ospf</a>   ospf3)]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p><b>multicast-rpf-routes</b> option introduced in Junos OS Release 7.5.</p> <p><b>advertise-unnumbered-interfaces</b> option introduced in Junos OS Release 8.5.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for OSPFv3 (<a href="#">ospf3</a>) introduced in Junos OS Release 9.4.</p> <p>Support for OSPFv3 (<a href="#">ospf3</a>) introduced in Junos OS Release 9.4 for EX Series switches.</p> <p><b>credibility-protocol-preference</b> statement introduced in Junos OS Release 9.4.</p> <p><b>credibility-protocol-preference</b> statement introduced in Junos OS Release 9.4 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>         | Enable the OSPF traffic engineering features.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Default</b>             | Traffic engineering support is disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>             | <p><b>advertise-unnumbered-interfaces</b>—(Optional) (OSPFv2 only) Include the link-local identifier in the link-local traffic-engineering link-state advertisement. This statement must be included on both ends of an unnumbered link to allow an ingress LER to update the link in its traffic engineering database and use it for CSPF calculations. The link-local identifier is then used by RSVP to signal unnumbered interfaces as defined in RFC 3477.</p> <p><b>credibility-protocol-preference</b>—(Optional) (OSPFv2 only) Use the configured preference value for OSPF routes to calculate the traffic engineering database credibility value used to select IGP routes. Use this statement to override the default behavior, in which the traffic engineering database prefers IS-IS routes even if OSPF routes are configured with a lower, that is, preferred, preference value. For example, OSPF routes have a default preference value of 10, whereas IS-IS Level 1 routes have a default preference value of 15. When protocol preference is enabled, the credibility value is determined by deducting the protocol preference value from a base value of 512. Using default protocol preference values, OSPF has a credibility value of 502,</p> |



whereas IS-IS has a credibility value of 497. Because the traffic engineering database prefers IGP routes with the highest credibility value, OSPF routes are now preferred.

**multicast-rpf-routes**—(Optional) (OSPFv2 only) Install routes for multicast RPF checks into the **inet.2** routing table. The **inet.2** routing table consists of unicast routes used for multicast RPF lookup. RPF is an antispoofing mechanism used to check whether the packet is coming in on an interface that is also sending data back to the packet source.



**NOTE:** You must enable OSPF traffic engineering shortcuts to use the **multicast-rpf-routes** statement. You must not allow LSP advertisements into OSPF when configuring the **multicast-rpf-routes** statement.

**no-topology**—(Optional) (OSPFv2 only) Disable the dissemination of the link-state topology information.

The remaining statements are explained separately.

|                                 |                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration. |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|

|                              |                                                                                                                                   |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Example: Enabling OSPF Traffic Engineering Support on page 3394</a></li></ul> |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|



## CHAPTER 39

# Administration

- [Routine Monitoring on page 3481](#)
- [Operational Commands on page 3481](#)

## Routine Monitoring

---

- [Monitoring OSPF Routing Information on page 3481](#)

### Monitoring OSPF Routing Information

**Purpose** Use the monitoring functionality to monitor OSPF routing information on routing devices.

**Action** To view OSPF routing information in the CLI, enter the following CLI commands:

- `show ospf neighbor`
- `show ospf interface`
- `show ospf statistics`

## Operational Commands

---



## clear (ospf | ospf3) database

---

**Syntax** clear (ospf | ospf3) database  
<advertising-router (*router-id* | self)>  
<area *area-id*>  
<asbrsummary>  
<external>  
<instance *instance-name*>  
<inter-area-prefix>  
<inter-area-router>  
<intra-area-prefix>  
<link-local>  
<logical-system (all | *logical-system-name*)>  
<lsa-id *lsa-id*>  
<netsummary>  
<network>  
<nssa>  
<opaque-area>  
<purge>  
<realm (ipv4-multicast | ipv4-unicast | ipv6-multicast)>  
<router>

**Syntax (EX Series Switch and QFX Series)** clear (ospf | ospf3) database  
<advertising-router (*router-id* | self)>  
<area *area-id*>  
<asbrsummary>  
<external>  
<instance *instance-name*>  
<inter-area-prefix>  
<inter-area-router>  
<intra-area-prefix>  
<link-local>  
<lsa-id *lsa-id*>  
<netsummary>  
<network>  
<nssa>  
<opaque-area>  
<purge>  
<router>

**Release Information** Command introduced before Junos OS Release 7.4.  
**advertising-router** *router-id*, **area** *area-id*, **asbrsummary**, **external**, **inter-area-prefix**, **inter-area-router**, **intra-area-prefix**, **link-local**, **lsa-id** *lsa-id*, **netsummary**, **network**, **nssa**, **opaque-area**, and **router** options added in Junos OS Release 8.3. You must use the **purge** command with these options.  
Command introduced in Junos OS Release 9.0 for EX Series switches.  
**realm** option added in Junos OS Release 9.2.  
**advertising-router** (*router-id* | **self**) option added in Junos OS Release 9.5.  
**advertising-router** (*router-id* | **self**) option introduced in Junos OS Release 9.5 for EX Series switches.  
Command introduced in Junos OS Release 11.3 for the QFX Series.



**Description** With the master Routing Engine, delete entries in the Open Shortest Path First (OSPF) link-state advertisement (LSA) database. With the backup Routing Engine, delete the OSPF LSA database and sync the new database with the master Routing Engine. You can also use the **purge** command with any of the options to discard rather than delete the specified LSA entries.



**CAUTION:** This command is useful only for testing. Use it with care, because it causes significant network disruption.

**Options**

- none**—Delete all LSAs other than the system's own LSAs, which are regenerated. To resynchronize the database, the system destroys all adjacent neighbors that are in the state **EXSTART** or higher. The neighbors are then reacquired and the databases are synchronized.
- advertising-router** (*router-id* | **self**)—(Optional) Discard entries for the LSA entries advertised by the specified routing device or by this routing device.
- area** *area-id*—(Optional) Discard entries for the LSAs in the specified area.
- asbrsummary**—(Optional) Discard summary AS boundary router LSA entries.
- external**—(Optional) Discard external LSAs.
- instance** *instance-name*—(Optional) Delete or discard entries for the specified routing instance only.
- inter-area-prefix**—(OSPFv3 only) (Optional) Discard interarea prefix LSAs.
- inter-area-router**—(OSPFv3 only) (Optional) Discard interarea router LSAs.
- intra-area-prefix**—(OSPFv3 only) (Optional) Discard intra-area prefix LSAs.
- logical-system** (**all** | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.
- link-local**—(Optional) Delete link-local LSAs.
- lsa-id** *lsa-id*—(Optional) Discard the LSA entries with the specified LSA identifier.
- netsummary**—(Optional) Discard summary network LSAs.
- network**—(Optional) Discard network LSAs.
- nssa**—(Optional) Discard not-so-stubby area (NSSA) LSAs.
- opaque-area**—(Optional) Discard opaque area-scope LSAs.
- realm** (**ipv4-multicast** | **ipv4-unicast** | **ipv6-multicast**)—(OSPFv3 only) (Optional) Delete the entries for the specified OSPFv3 realm, or address family. Use the **realm** option to specify an address family for OSPFv3 other than IPv6 unicast, which is the default.



**router**—(Optional) Discard router LSAs.

**purge**—(Optional) Discard all entries in the link-state advertisement database. All link-state advertisements are set to **MAXAGE** and are flooded. The database is repopulated when the originators of the link-state advertisements receive the **MAXAGE** link-state advertisements and reissue them.

**Required Privilege Level**

clear

**Related Documentation**

- [show ospf database on page 3499](#)
- show ospf3 database

**List of Sample Output**

[clear ospf database on page 3484](#)

**Output Fields**

When you enter this command, you are provided feedback on the status of your request.

## Sample Output

**clear ospf database**

user@host> clear ospf database



---

## clear (ospf | ospf3) database-protection

---

|                                 |                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear (ospf   ospf3) database-protection<br><instance <i>instance-name</i> >                                                                                                |
| <b>Release Information</b>      | Command introduced in Junos OS Release 10.2.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                             |
| <b>Description</b>              | Clear the Open Shortest Path First (OSPF) link-state database from its isolated state. Reset the ignore count, ignore timer, and reset timer, and resume normal operations. |
| <b>Options</b>                  | <b>instance <i>instance-name</i></b> —(Optional) Clear the OSPF link-state database for the specified routing instance only.                                                |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                       |
| <b>Output Fields</b>            | This command produces no output.                                                                                                                                            |

### Sample Output

|                                   |                                           |
|-----------------------------------|-------------------------------------------|
| clear ospf<br>database-protection | user@host> clear ospf database-protection |
|-----------------------------------|-------------------------------------------|



## clear (ospf | ospf3) io-statistics

---

|                                                 |                                                                                                                                                                                                                   |
|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                   | clear (ospf   ospf3) io-statistics<br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                        |
| <b>Syntax (EX Series Switch and QFX Series)</b> | clear (ospf   ospf3) io-statistics                                                                                                                                                                                |
| <b>Release Information</b>                      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                          |
| <b>Description</b>                              | Clear Open Shortest Path First (OSPF) input and output statistics.                                                                                                                                                |
| <b>Options</b>                                  | <b>none</b> —Clear OSPF input and output statistics.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| <b>Required Privilege Level</b>                 | clear                                                                                                                                                                                                             |
| <b>List of Sample Output</b>                    | <a href="#">clear ospf io-statistics on page 3486</a>                                                                                                                                                             |
| <b>Output Fields</b>                            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                             |

## Sample Output

**clear ospf io-statistics**     user@host> clear ospf io-statistics



## clear (ospf | ospf3) neighbor

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                   | clear (ospf   ospf3) neighbor<br><area <i>area-id</i> ><br><instance <i>instance-name</i> ><br><interface <i>interface-name</i> ><br><logical-system (all   <i>logical-system-name</i> )><br><neighbor><br><realm (ipv4-multicast   ipv4-unicast   ipv6-multicast)>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Syntax (EX Series Switch and QFX Series)</b> | clear (ospf   ospf3) neighbor<br><area <i>area-id</i> ><br><instance <i>instance-name</i> ><br><interface <i>interface-name</i> ><br><neighbor>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>                      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>realm</b> option introduced in Junos OS Release 9.2.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>                              | Tear down Open Shortest Path First (OSPF) neighbor connections.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Options</b>                                  | <p><b>none</b>—Tear down OSPF connections with all neighbors for all routing instances.</p> <p><b>area <i>area-id</i></b>—(Optional) Tear down neighbor connections for the specified area only.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Tear down neighbor connections for the specified routing instance only.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Tear down neighbor connections for the specified interface only.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>neighbor</b>—(Optional) Clear the state of the specified neighbor only.</p> <p><b>realm (ipv4-multicast   ipv4-unicast   ipv6-multicast)</b>—(Optional) (OSPFv3 only) Clear the state of the specified OSPFv3 realm, or address family. Use the <b>realm</b> option to specify an address family for OSPFv3 other than IPv6 unicast, which is the default.</p> |
| <b>Required Privilege Level</b>                 | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>                    | <ul style="list-style-type: none"> <li>• <a href="#">show (ospf   ospf3) neighbor on page 3520</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>List of Sample Output</b>                    | <a href="#">clear ospf neighbor on page 3488</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Output Fields</b>                            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |



## Sample Output

```
clear ospf neighbor      user@host> clear ospf neighbor
```



## clear (ospf | ospf3) statistics

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                   | clear (ospf   ospf3) statistics<br><instance <i>instance-name</i> ><br><logical-system (all   <i>logical-system-name</i> )><br><realm (ipv4-multicast   ipv4-unicast   ipv6-multicast)>                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Syntax (EX Series Switch and QFX Series)</b> | clear (ospf   ospf3) statistics<br><instance <i>instance-name</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>                      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>realm</b> option introduced in Junos OS Release 9.2.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>                              | Clear Open Shortest Path First (OSPF) statistics.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                                  | <p><b>none</b>—Clear OSPF statistics.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Clear statistics for the specified routing instance only.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>realm (ipv4-multicast   ipv4-unicast   ipv6-multicast)</b>—(Optional) (OSPFv3 only) Clear statistics for the specified OSPFv3 realm, or address family. Use the <b>realm</b> option to specify an address family for OSPFv3 other than IPv6 unicast, which is the default.</p> |
| <b>Required Privilege Level</b>                 | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>                    | <ul style="list-style-type: none"> <li>• <a href="#">show (ospf   ospf3) statistics on page 3538</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>List of Sample Output</b>                    | <a href="#">clear ospf statistics on page 3490</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Output Fields</b>                            | See <a href="#">show (ospf   ospf3) statistics</a> for an explanation of output fields.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |



## Sample Output

### clear ospf statistics

The following sample output displays OSPF statistics before and after the **clear ospf statistics** command is entered:

user@host> show ospf statistics

| Packet type | Total |          | Last 5 seconds |          |
|-------------|-------|----------|----------------|----------|
|             | Sent  | Received | Sent           | Received |
| Hello       | 3254  | 2268     | 3              | 1        |
| DbD         | 41    | 46       | 0              | 0        |
| LSReq       | 8     | 7        | 0              | 0        |
| LSUpdate    | 212   | 154      | 0              | 0        |
| LSAck       | 65    | 98       | 0              | 0        |

|                          |   |                    |   |   |
|--------------------------|---|--------------------|---|---|
| DBDs retransmitted       | : | 3, last 5 seconds  | : | 0 |
| LSAs flooded             | : | 12, last 5 seconds | : | 0 |
| LSAs flooded high-prio   | : | 0, last 5 seconds  | : | 0 |
| LSAs retransmitted       | : | 0, last 5 seconds  | : | 0 |
| LSAs transmitted to nbr: | : | 3, last 5 seconds  | : | 0 |
| LSAs requested           | : | 5, last 5 seconds  | : | 0 |
| LSAs acknowledged        | : | 19, last 5 seconds | : | 0 |

|                      |   |   |
|----------------------|---|---|
| Flood queue depth    | : | 0 |
| Total rexmit entries | : | 0 |
| db summaries         | : | 0 |
| lsreq entries        | : | 0 |

Receive errors:

626 subnet mismatches

user@host> clear ospf statistics

user@host> show ospf statistics

| Packet type | Total |          | Last 5 seconds |          |
|-------------|-------|----------|----------------|----------|
|             | Sent  | Received | Sent           | Received |
| Hello       | 3     | 1        | 3              | 1        |
| DbD         | 0     | 0        | 0              | 0        |
| LSReq       | 0     | 0        | 0              | 0        |
| LSUpdate    | 0     | 0        | 0              | 0        |
| LSAck       | 0     | 0        | 0              | 0        |

|                          |   |                   |   |   |
|--------------------------|---|-------------------|---|---|
| DBDs retransmitted       | : | 0, last 5 seconds | : | 0 |
| LSAs flooded             | : | 0, last 5 seconds | : | 0 |
| LSAs flooded high-prio   | : | 0, last 5 seconds | : | 0 |
| LSAs retransmitted       | : | 0, last 5 seconds | : | 0 |
| LSAs transmitted to nbr: | : | 0, last 5 seconds | : | 0 |
| LSAs requested           | : | 0, last 5 seconds | : | 0 |
| LSAs acknowledged        | : | 0, last 5 seconds | : | 0 |

|                      |   |   |
|----------------------|---|---|
| Flood queue depth    | : | 0 |
| Total rexmit entries | : | 0 |
| db summaries         | : | 0 |
| lsreq entries        | : | 0 |

Receive errors:

None



## clear (ospf | ospf3) overload

---

|                                    |                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | clear (ospf   ospf3) overload<br><instance <i>instance-name</i> ><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                 |
| <b>Syntax (EX Series Switches)</b> | clear (ospf   ospf3) overload<br><instance <i>instance-name</i> >                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                  |
| <b>Description</b>                 | Clear the Open Shortest Path First (OSPF) overload bit and rebuild link-state advertisements (LSAs).                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                     | <p><b>none</b>—Clear the overload bit and rebuild LSAs for all routing instances.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Clear the overload bit and rebuild LSAs for the specified routing instance only.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>    | clear                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>List of Sample Output</b>       | <a href="#">clear ospf overload on page 3491</a>                                                                                                                                                                                                                                                                                                                                          |
| <b>Output Fields</b>               | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                     |

## Sample Output

**clear ospf overload**      user@host> clear ospf overload



## show (ospf | ospf3) backup coverage

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>show (ospf   ospf3) backup coverage &lt;instance <i>instance-name</i>&gt; &lt; logical-system (all   <i>logical-system-name</i>)&gt; &lt;realm (ipv4-unicast   ipv6-unicast)&gt; &lt;topology <i>topology-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Syntax (QFX Series)</b>      | <pre>show (ospf   ospf3) backup coverage &lt;instance <i>instance-name</i>&gt; &lt;topology <i>topology-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | <p>Command introduced in Junos OS Release 10.0.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Display information about the level of backup coverage available for all the nodes and prefixes in the network.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <p><b>none</b>—Display information about the level backup coverage for all OSPF routing instances in all logical systems.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Display information about the level of backup coverage for all logical systems or for a specific logical system.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display information about the level of backup coverage for a specific OSPF routing instance.</p> <p><b>realm (ipv4-unicast   ipv6-unicast)</b>—(Optional) (OSPFv3 only) Display information about the level of backup coverage for the specific OSPFv3 realm, or address family.</p> <p><b>topology (default   <i>topology-name</i>)</b>—(Optional) (OSPFv2 only) Display information about the level of backup coverage for the specific OSPF topology.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>show (ospf   ospf3) backup lsp</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>List of Sample Output</b>    | <p><a href="#">show ospf backup coverage on page 3494</a></p> <p><a href="#">show ospf3 backup coverage on page 3494</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Output Fields</b>            | <p><a href="#">Table 222 on page 3492</a> lists the output fields for the <b>show (ospf   ospf3) backup coverage</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

**Table 222: show (ospf | ospf3) backup coverage Output Fields**

| Field Name    | Field Description                                     |
|---------------|-------------------------------------------------------|
| Node Coverage | Information about backup coverage for each OSPF node. |
| Area          | Area number. Area 0.0.0.0 is the backbone.            |



Table 222: show (ospf | ospf3) backup coverage Output Fields (*continued*)

| Field Name             | Field Description                                                                             |
|------------------------|-----------------------------------------------------------------------------------------------|
| <b>Covered Nodes</b>   | Number of nodes for which backup coverage is available.                                       |
| <b>Total Nodes</b>     | Total number of OSPF nodes.                                                                   |
| <b>Route Coverage</b>  | Information about backup coverage for each type of OSPF route.                                |
| <b>Path Type</b>       | Type of OSPF path: <b>Intra</b> , <b>Inter</b> , <b>Ext1</b> , <b>Ext2</b> , and <b>All</b> . |
| <b>Covered Routes</b>  | For each path type, the number of routes for which backup coverage is available.              |
| <b>Total Routes</b>    | For each path type, the total number of configured routes.                                    |
| <b>Percent Covered</b> | For all nodes and for each path type, the percentage for which backup coverage is available.  |



## Sample Output

### show ospf backup coverage

```
user@host> show ospf backup coverage
```

```
Topology default coverage:
```

```
Node Coverage:
```

| Area    | Covered<br>Nodes | Total<br>Nodes | Percent<br>Covered |
|---------|------------------|----------------|--------------------|
| 0.0.0.0 | 4                | 5              | 80.00%             |

```
Route Coverage:
```

| Path Type | Covered<br>Routes | Total<br>Routes | Percent<br>Covered |
|-----------|-------------------|-----------------|--------------------|
| Intra     | 8                 | 14              | 57.14%             |
| Inter     | 0                 | 0               | 100.00%            |
| Ext1      | 0                 | 0               | 100.00%            |
| Ext2      | 1                 | 1               | 100.00%            |
| All       | 9                 | 15              | 60.00%             |

### show ospf3 backup coverage

```
user @host > show ospf3 backup coverage
```

```
show ospf3 backup coverage
```

```
Node Coverage:
```

| Area    | Covered<br>Nodes | Total<br>Nodes | Percent<br>Covered |
|---------|------------------|----------------|--------------------|
| 0.0.0.0 | 4                | 5              | 80.00%             |

```
Route Coverage:
```

| Path Type | Covered<br>Routes | Total<br>Routes | Percent<br>Covered |
|-----------|-------------------|-----------------|--------------------|
| Intra     | 4                 | 6               | 66.67%             |
| Inter     | 0                 | 0               | 100.00%            |
| Ext1      | 0                 | 0               | 100.00%            |
| Ext2      | 1                 | 1               | 100.00%            |
| All       | 5                 | 7               | 71.43%             |



## show (ospf | ospf3) backup neighbor

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show (ospf   ospf3) backup neighbor<br><area <i>area-id</i> ><br><instance (default   <i>instance-name</i> )><br><logical-system (default   ipv4-multicast   <i>logical-system-name</i> )><br><topology (default   ipv4-multicast   <i>topology-name</i> )>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Syntax (QFX Series)</b>      | show (ospf   ospf3) backup neighbor<br><area <i>area-id</i> ><br><instance <i>instance-name</i> ><br><topology (default   ipv4-multicast   <i>topology-name</i> )>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | Command introduced in Junos OS Release 10.0.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | Display the neighbors through which direct next hops for the backup paths are available.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <p><b>none</b>—Display all neighbors that have direct next hops for backup paths.</p> <p><b>area <i>area-id</i></b>—(Optional) Display the area information.</p> <p><b>instance (default   <i>instance-name</i>)</b>—(Optional) Display information about the default routing instance or a particular routing instance.</p> <p><b>logical-system (default   ipv4-multicast   <i>logical-system-name</i>)</b>—(Optional) Display information about the default logical system, IPv4 multicast logical system, or a particular logical system.</p> <p><b>topology (default   ipv4-multicast   <i>topology-name</i>)</b>—(OSPFv2 only) (Optional) Display information about the default topology, IPv4 multicast topology, or a particular topology.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>show (ospf   ospf3) backup spf</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>List of Sample Output</b>    | <a href="#">show ospf backup neighbor on page 3496</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Output Fields</b>            | <a href="#">Table 223 on page 3495</a> lists the output fields for the <b>show (ospf   ospf3) backup neighbor</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

**Table 223: show (ospf | ospf3) backup neighbor Output Fields**

| Field Name              | Field Description                                 | Level of Output |
|-------------------------|---------------------------------------------------|-----------------|
| Neighbor to Self Metric | Metric from the backup neighbor to the OSPF node. | All levels      |
| Self to Neighbor Metric | Metric from the OSPF node to the backup neighbor. | All levels      |



Table 223: show (ospf |ospf3) backup neighbor Output Fields (*continued*)

| Field Name      | Field Description                             | Level of Output |
|-----------------|-----------------------------------------------|-----------------|
| Direct next-hop | Interface and address of the direct next hop. | All levels      |

## Sample Output

**show ospf backup  
neighbor**

```
user@host> show ospf backup neighbor
Topology default backup neighbors:
```

```
Area 0.0.0.5 backup neighbors:
```

```
10.0.0.5
```

```
Neighbor to Self Metric: 5
```

```
Self to Neighbor Metric: 5
```

```
Direct next-hop: ge-4/0/0.111 via 10.0.175.5
```

```
10.0.0.6
```

```
Neighbor to Self Metric: 5
```

```
Self to Neighbor Metric: 5
```

```
Direct next-hop: ge-4/1/0.110 via 10.0.176.6
```



## show ospf context-identifier

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                     | <pre>show ospf context-identifier &lt;brief   detail&gt; &lt;area <i>area-id</i>&gt; &lt;context-id&gt; &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Syntax (EX Series Switches and QFX Series)</b> | <pre>show ospf context-identifier &lt;brief   detail&gt; &lt;area <i>area-id</i>&gt; &lt;context-id&gt; &lt;instance <i>instance-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>                        | <p>Command introduced in Junos OS Release 10.4.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>                                | Display the context identifier information processed and advertised by Open Shortest Path First (OSPF) for egress protection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                                    | <p><b>none</b>—Display information about all context identifiers.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>area <i>area-id</i></b>—(Optional) Display information about the context identifier for the specified area.</p> <p><b>context-id</b>—(Optional) Display information about the specified context identifier.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display information about the context identifier for the specified routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                   | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>                      | <ul style="list-style-type: none"> <li>egress-protection (Layer 2 circuit) in the Junos OS VPNs Configuration Guide</li> <li>egress-protection (MPLS) in the Junos OS VPNs Configuration Guide</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>List of Sample Output</b>                      | <p><a href="#">show ospf context-identifier on page 3498</a></p> <p><a href="#">show ospf context-identifier detail on page 3498</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Output Fields</b>                              | <p><a href="#">Table 224 on page 3498</a> lists the output fields for the <b>show ospf context-identifier</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



Table 224: show ospf context-identifier Output Fields

| Field Name                  | Field Description                                                                                                                                                                                                                                                                                                                                                                                  | Level of Output |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Context</b>              | IPv4 address that defines a protection pair. The context is manually configured on both primary and protector provider edge (PE) devices.                                                                                                                                                                                                                                                          | All levels      |
| <b>Status</b>               | State of the path: <b>active</b> or <b>inactive</b> .                                                                                                                                                                                                                                                                                                                                              | All levels      |
| <b>Metric</b>               | Advertised OSPF metric.                                                                                                                                                                                                                                                                                                                                                                            | All levels      |
| <b>Area</b>                 | OSPF area number.                                                                                                                                                                                                                                                                                                                                                                                  | All levels      |
| <b>Other Advertisements</b> | Other advertisements received by the OSPF node: <ul style="list-style-type: none"> <li>• <b>Advertising router</b>—Address of the device that sent the advertisement.</li> <li>• <b>Type</b>—Type of OSPF path: <b>inter-area</b> and <b>stub</b>.</li> <li>• <b>Metric</b>—Advertised OSPF metric.</li> <li>• <b>None</b>—No additional advertisements were received by the OSPF node.</li> </ul> | <b>detail</b>   |

## Sample Output

### show ospf context-identifier

```
user@host> show ospf context-identifier
Context-id: 2.2.4.3
Status: active, Metric: 65534, PE role: protector, Area: 0.0.0.0
```

### show ospf context-identifier detail

```
user@host> show ospf context-identifier detail
Context-id: 88.24.13.1
Status: inactive, Metric: 0, PE role: protector, Area: 0.0.0.13
Other Advertisements:
Advertising router: 8.8.8.103
Type: stub link
Metric: 65534
```



## show ospf database

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                     | <pre>show ospf database &lt;brief   detail   extensive   summary&gt; &lt;advertising-router (address   self)&gt; &lt;area area-id&gt; &lt;asbrsummary&gt; &lt;external&gt; &lt;instance instance-name&gt; &lt;link-local&gt; &lt;logical-system (all   logical-system-name)&gt; &lt;lsa-id lsa-id&gt; &lt;netsummary&gt; &lt;network&gt; &lt;nssa&gt; &lt;opaque-area&gt; &lt;router&gt;</pre>                                                                         |
| <b>Syntax (EX Series Switches and QFX Series)</b> | <pre>show ospf database &lt;brief   detail   extensive   summary&gt; &lt;advertising-router (address   self)&gt; &lt;area area-id&gt; &lt;asbrsummary&gt; &lt;external&gt; &lt;instance instance-name&gt; &lt;link-local&gt; &lt;lsa-id lsa-id&gt; &lt;netsummary&gt; &lt;network&gt; &lt;nssa&gt; &lt;opaque-area&gt; &lt;router&gt;</pre>                                                                                                                            |
| <b>Release Information</b>                        | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>advertising-router self (address   self)</b> option introduced in Junos OS Release 9.5.</p> <p><b>advertising-router self (address   self)</b> option introduced in Junos OS Release 9.5 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p>                                     |
| <b>Description</b>                                | Display the entries in the OSPF version 2 (OSPFv2) link-state database, which contains data about link-state advertisement (LSA) packets.                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                                    | <p><b>none</b>—Display standard information about entries in the OSPFv2 link-state database for all routing instances.</p> <p><b>brief   detail   extensive   summary</b>—(Optional) Display the specified level of output.</p> <p><b>advertising-router (address   self)</b>—(Optional) Display the LSAs advertised either by a particular routing device or by this routing device.</p> <p><b>area area-id</b>—(Optional) Display the LSAs in a particular area.</p> |



**asbrsummary**—(Optional) Display summary AS boundary router LSA entries.

**external**—(Optional) Display external LSAs.

**instance *instance-name***—(Optional) Display all OSPF database information under the named routing instance.

**link-local**—(Optional) Display information about link-local LSAs.

**logical-system (all | *logical-system-name*)**—(Optional) Perform this operation on all logical systems or on a particular logical system.

**lsa-id *lsa-id***—(Optional) Display the LSA with the specified LSA identifier.

**netsummary**—(Optional) Display summary network LSAs.

**network**—(Optional) Display information about network LSAs.

**nssa**—(Optional) Display information about not-so-stubby area (NSSA) LSAs.

**opaque-area**—(Optional) Display opaque area-scope LSAs.

**router**—(Optional) Display information about router LSAs.

**Required Privilege Level**

view

**Related Documentation**

- [clear \(ospf | ospf3\) database on page 3482](#)

**List of Sample Output**

[show ospf database on page 3503](#)  
[show ospf database brief on page 3503](#)  
[show ospf database detail on page 3503](#)  
[show ospf database extensive on page 3504](#)  
[show ospf database summary on page 3507](#)

**Output Fields**

[Table 225 on page 3500](#) describes the output fields for the **show ospf database** command. Output fields are listed in the approximate order in which they appear.

**Table 225: show ospf database Output Fields**

| Field Name     | Field Description                                                                                                                                        | Level of Output |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>area</b>    | Area number. Area 0.0.0.0 is the backbone area.                                                                                                          | All levels      |
| <b>Type</b>    | Type of link advertisement: <b>ASBRSum</b> , <b>Extern</b> , <b>Network</b> , <b>NSSA</b> , <b>OpaqArea</b> , <b>Router</b> , or <b>Summary</b> .        | All levels      |
| <b>ID</b>      | LSA identifier included in the advertisement. An asterisk preceding the identifier marks database entries that originated from the local routing device. | All levels      |
| <b>Adv Rtr</b> | Address of the routing device that sent the advertisement.                                                                                               | All levels      |
| <b>Seq</b>     | Link sequence number of the advertisement.                                                                                                               | All levels      |



Table 225: show ospf database Output Fields (*continued*)

| Field Name                              | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Level of Output         |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>Age</b>                              | Time elapsed since the LSA was originated, in seconds.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | All levels              |
| <b>Opt</b>                              | Optional OSPF capabilities associated with the LSA.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | All levels              |
| <b>Cksum</b>                            | Checksum value of the LSA.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | All levels              |
| <b>Len</b>                              | Length of the advertisement, in bytes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | All levels              |
| <b>Router</b>                           | Router link-state advertisement information: <ul style="list-style-type: none"> <li>• <b>bits</b>—Flags describing the routing device that generated the LSP.</li> <li>• <b>link count</b>—Number of links in the advertisement.</li> <li>• <b>id</b>—ID of a routing device or subnet on the link.</li> <li>• <b>data</b>—For stub networks, the subnet mask. Otherwise, the IP address of the routing device that generated the LSP.</li> <li>• <b>type</b>—Type of link. It can be <b>PointToPoint</b>, <b>Transit</b>, <b>Stub</b>, or <b>Virtual</b>.</li> <li>• <b>TOS count</b>—Number of type-of-service (ToS) entries in the advertisement.</li> <li>• <b>TOS 0 metric</b>—Metric for ToS 0.</li> <li>• <b>TOS</b>—Type-of-service (ToS) value.</li> <li>• <b>metric</b>—Metric for the ToS.</li> </ul> | <b>detail extensive</b> |
| <b>Network</b>                          | Network link-state advertisement information: <ul style="list-style-type: none"> <li>• <b>mask</b>—Network mask.</li> <li>• <b>attached router</b>—ID of the attached neighbor.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>detail extensive</b> |
| <b>Summary</b>                          | Summary link-state advertisement information: <ul style="list-style-type: none"> <li>• <b>mask</b>—Network mask.</li> <li>• <b>TOS</b>—Type-of-service (ToS) value.</li> <li>• <b>metric</b>—Metric for the ToS.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>detail extensive</b> |
| <b>Gen timer</b>                        | How long until the LSA is regenerated.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>extensive</b>        |
| <b>Aging timer</b>                      | How long until the LSA expires.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>extensive</b>        |
| <b>Installed <i>hh:mm:ss</i> ago</b>    | How long ago the route was installed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <b>extensive</b>        |
| <b>expires in <i>hh:mm:ss</i></b>       | How long until the route expires.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>extensive</b>        |
| <b>sent <i>hh:mm:ss</i> ago</b>         | How long ago the LSA was sent.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>extensive</b>        |
| <b>Last changed <i>hh:mm:ss</i> ago</b> | How long ago the route was changed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <b>extensive</b>        |
| <b>Change count</b>                     | Number of times the route has changed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>extensive</b>        |



Table 225: show ospf database Output Fields (*continued*)

| Field Name          | Field Description                                                                  | Level of Output  |
|---------------------|------------------------------------------------------------------------------------|------------------|
| <b>Ours</b>         | Indicates that this is a local advertisement.                                      | <b>extensive</b> |
| <b>Router LSAs</b>  | Number of router link-state advertisements in the link-state database.             | <b>summary</b>   |
| <b>Network LSAs</b> | Number of network link-state advertisements in the link-state database.            | <b>summary</b>   |
| <b>Summary LSAs</b> | Number of summary link-state advertisements in the link-state database.            | <b>summary</b>   |
| <b>NSSA LSAs</b>    | Number of not-so-stubby area link-state advertisements in the link-state database. | <b>summary</b>   |



## Sample Output

### show ospf database

```

user@host> show ospf database
OSPF link state database, Area 0.0.0.1
  Type      ID            Adv Rtr          Seq      Age  Opt  Cksum  Len
Router     10.255.70.103    10.255.70.103    0x80000002 215  0x20 0x4112 48
Router     *10.255.71.242   10.255.71.242    0x80000002 214  0x20 0x11b1 48
Summary    *23.1.1.0        10.255.71.242    0x80000002 172  0x20 0x6d72 28
Summary    *24.1.1.0        10.255.71.242    0x80000002 177  0x20 0x607e 28
NSSA       *33.1.1.1        10.255.71.242    0x80000002 217  0x28 0x73bd 36

      OSPF link state database, Area 0.0.0.2
  Type      ID            Adv Rtr          Seq      Age  Opt  Cksum  Len
Router     10.255.71.52    10.255.71.52     0x80000004 174  0x20 0xd021 36
Router     *10.255.71.242   10.255.71.242    0x80000003 173  0x20 0xe191 36
Network    *23.1.1.1        10.255.71.242    0x80000002 173  0x20 0x9c76 32
Summary    *12.1.1.0        10.255.71.242    0x80000001 217  0x20 0xfeec 28
Summary    *24.1.1.0        10.255.71.242    0x80000002 177  0x20 0x607e 28
NSSA       *33.1.1.1        10.255.71.242    0x80000001 222  0x28 0xe047 36

      OSPF link state database, Area 0.0.0.3
  Type      ID            Adv Rtr          Seq      Age  Opt  Cksum  Len
Router     10.255.71.238    10.255.71.238    0x80000003 179  0x20 0x3942 36
Router     *10.255.71.242   10.255.71.242    0x80000003 177  0x20 0xf37d 36
Network    *24.1.1.1        10.255.71.242    0x80000002 177  0x20 0xc591 32
Summary    *12.1.1.0        10.255.71.242    0x80000001 217  0x20 0xfeec 28
Summary    *23.1.1.0        10.255.71.242    0x80000002 172  0x20 0x6d72 28
NSSA       *33.1.1.1        10.255.71.242    0x80000001 222  0x28 0xeb3b 36

```

### show ospf database brief

The output for the **show ospf database brief** command is identical to that for the **show ospf database** command. For sample output, see [show ospf database on page 3503](#).

### show ospf database detail

```

user@host> show ospf database detail
      OSPF link state database, Area 0.0.0.1
  Type      ID            Adv Rtr          Seq      Age  Opt  Cksum  Len
Router     10.255.70.103    10.255.70.103    0x80000002 261  0x20 0x4112 48
  bits 0x0, link count 2
  id 10.255.71.242, data 12.1.1.1, Type PointToPoint (1)
  TOS count 0, TOS 0 metric 1
  id 12.1.1.0, data 255.255.255.0, Type Stub (3)
  TOS count 0, TOS 0 metric 1
Router     *10.255.71.242   10.255.71.242    0x80000002 260  0x20 0x11b1 48
  bits 0x3, link count 2
  id 10.255.70.103, data 12.1.1.2, Type PointToPoint (1)
  TOS count 0, TOS 0 metric 1
  id 12.1.1.0, data 255.255.255.0, Type Stub (3)
  TOS count 0, TOS 0 metric 1
Summary    *23.1.1.0        10.255.71.242    0x80000002 218  0x20 0x6d72 28
  mask 255.255.255.0
  TOS 0x0, metric 1
Summary    *24.1.1.0        10.255.71.242    0x80000002 223  0x20 0x607e 28
  mask 255.255.255.0
  TOS 0x0, metric 1
NSSA       *33.1.1.1        10.255.71.242    0x80000002 263  0x28 0x73bd 36
  mask 255.255.255.255
  Type 2, TOS 0x0, metric 0, fwd addr 12.1.1.2, tag 0.0.0.0

      OSPF link state database, Area 0.0.0.2

```



```

Type      ID          Adv Rtr      Seq      Age  Opt  Cksum  Len
Router  10.255.71.52    10.255.71.52  0x80000004 220  0x20 0xd021 36
  bits 0x0, link count 1
  id 23.1.1.1, data 23.1.1.2, Type Transit (2)
  TOS count 0, TOS 0 metric 1
Router *10.255.71.242 10.255.71.242 0x80000003 219  0x20 0xe191 36
  bits 0x3, link count 1
  id 23.1.1.1, data 23.1.1.1, Type Transit (2)
  TOS count 0, TOS 0 metric 1
Network *23.1.1.1    10.255.71.242 0x80000002 219  0x20 0x9c76 32
  mask 255.255.255.0
  attached router 10.255.71.242
  attached router 10.255.71.52
Summary *12.1.1.0    10.255.71.242 0x80000001 263  0x20 0xfeec 28
  mask 255.255.255.0
  TOS 0x0, metric 1
Summary *24.1.1.0    10.255.71.242 0x80000002 223  0x20 0x607e 28
  mask 255.255.255.0
  TOS 0x0, metric 1
NSSA   *33.1.1.1      10.255.71.242 0x80000001 268  0x28 0xe047 36
  mask 255.255.255.255
  Type 2, TOS 0x0, metric 0, fwd addr 23.1.1.1, tag 0.0.0.0

```

#### OSPF link state database, Area 0.0.0.3

```

Type      ID          Adv Rtr      Seq      Age  Opt  Cksum  Len
Router  10.255.71.238  10.255.71.238 0x80000003 225  0x20 0x3942 36
  bits 0x0, link count 1
  id 24.1.1.1, data 24.1.1.2, Type Transit (2)
  TOS count 0, TOS 0 metric 1
Router *10.255.71.242 10.255.71.242 0x80000003 223  0x20 0xf37d 36
  bits 0x3, link count 1
  id 24.1.1.1, data 24.1.1.1, Type Transit (2)
  TOS count 0, TOS 0 metric 1
Network *24.1.1.1    10.255.71.242 0x80000002 223  0x20 0xc591 32
  mask 255.255.255.0
  attached router 10.255.71.242
  attached router 10.255.71.238
Summary *12.1.1.0    10.255.71.242 0x80000001 263  0x20 0xfeec 28
  mask 255.255.255.0
  TOS 0x0, metric 1
Summary *23.1.1.0    10.255.71.242 0x80000002 218  0x20 0x6d72 28
  mask 255.255.255.0
  TOS 0x0, metric 1
NSSA   *33.1.1.1      10.255.71.242 0x80000001 268  0x28 0xeb3b 36
  mask 255.255.255.255
  Type 2, TOS 0x0, metric 0, fwd addr 24.1.1.1, tag 0.0.0.0

```

#### show ospf database extensive

```
user@host> show ospf database extensive
```

#### OSPF link state database, Area 0.0.0.1

```

Type      ID          Adv Rtr      Seq      Age  Opt  Cksum  Len
Router  10.255.70.103  10.255.70.103 0x80000002 286  0x20 0x4112 48
  bits 0x0, link count 2
  id 10.255.71.242, data 12.1.1.1, Type PointToPoint (1)
  TOS count 0, TOS 0 metric 1
  id 12.1.1.0, data 255.255.255.0, Type Stub (3)
  TOS count 0, TOS 0 metric 1
  Aging timer 00:55:14
  Installed 00:04:43 ago, expires in 00:55:14
  Last changed 00:04:43 ago, Change count: 2
Router *10.255.71.242 10.255.71.242 0x80000002 285  0x20 0x11b1 48
  bits 0x3, link count 2

```



```

id 10.255.70.103, data 12.1.1.2, Type PointToPoint (1)
TOS count 0, TOS 0 metric 1
id 12.1.1.0, data 255.255.255.0, Type Stub (3)
TOS count 0, TOS 0 metric 1
Gen timer 00:45:15
Aging timer 00:55:15
Installed 00:04:45 ago, expires in 00:55:15, sent 00:04:43 ago
Last changed 00:04:45 ago, Change count: 2, Ours
Summary *23.1.1.0      10.255.71.242    0x80000002    243    0x20 0x6d72    28
mask 255.255.255.0
TOS 0x0, metric 1
Gen timer 00:45:57
Aging timer 00:55:57
Installed 00:04:03 ago, expires in 00:55:57, sent 00:04:01 ago
Last changed 00:04:48 ago, Change count: 1, Ours
Summary *24.1.1.0      10.255.71.242    0x80000002    248    0x20 0x607e    28
mask 255.255.255.0
TOS 0x0, metric 1
Gen timer 00:45:52
Aging timer 00:55:52
Installed 00:04:08 ago, expires in 00:55:52, sent 00:04:06 ago
Last changed 00:04:48 ago, Change count: 1, Ours
NSSA  *33.1.1.1        10.255.71.242    0x80000002    288    0x28 0x73bd    36
mask 255.255.255.255
Type 2, TOS 0x0, metric 0, fwd addr 12.1.1.2, tag 0.0.0.0
Gen timer 00:45:12
Aging timer 00:55:12
Installed 00:04:48 ago, expires in 00:55:12, sent 00:04:48 ago
Last changed 00:04:48 ago, Change count: 2, Ours

```

#### OSPF link state database, Area 0.0.0.2

| Type                                                           | ID             | Adv Rtr       | Seq        | Age | Opt  | Cksum  | Len |
|----------------------------------------------------------------|----------------|---------------|------------|-----|------|--------|-----|
| Router                                                         | 10.255.71.52   | 10.255.71.52  | 0x80000004 | 245 | 0x20 | 0xd021 | 36  |
| bits 0x0, link count 1                                         |                |               |            |     |      |        |     |
| id 23.1.1.1, data 23.1.1.2, Type Transit (2)                   |                |               |            |     |      |        |     |
| TOS count 0, TOS 0 metric 1                                    |                |               |            |     |      |        |     |
| Aging timer 00:55:55                                           |                |               |            |     |      |        |     |
| Installed 00:04:02 ago, expires in 00:55:55                    |                |               |            |     |      |        |     |
| Last changed 00:04:02 ago, Change count: 2                     |                |               |            |     |      |        |     |
| Router                                                         | *10.255.71.242 | 10.255.71.242 | 0x80000003 | 244 | 0x20 | 0xe191 | 36  |
| bits 0x3, link count 1                                         |                |               |            |     |      |        |     |
| id 23.1.1.1, data 23.1.1.1, Type Transit (2)                   |                |               |            |     |      |        |     |
| TOS count 0, TOS 0 metric 1                                    |                |               |            |     |      |        |     |
| Gen timer 00:45:56                                             |                |               |            |     |      |        |     |
| Aging timer 00:55:56                                           |                |               |            |     |      |        |     |
| Installed 00:04:04 ago, expires in 00:55:56, sent 00:04:02 ago |                |               |            |     |      |        |     |
| Last changed 00:04:04 ago, Change count: 2, Ours               |                |               |            |     |      |        |     |
| Network                                                        | *23.1.1.1      | 10.255.71.242 | 0x80000002 | 244 | 0x20 | 0x9c76 | 32  |
| mask 255.255.255.0                                             |                |               |            |     |      |        |     |
| attached router 10.255.71.242                                  |                |               |            |     |      |        |     |
| attached router 10.255.71.52                                   |                |               |            |     |      |        |     |
| Gen timer 00:45:56                                             |                |               |            |     |      |        |     |
| Aging timer 00:55:56                                           |                |               |            |     |      |        |     |
| Installed 00:04:04 ago, expires in 00:55:56, sent 00:04:02 ago |                |               |            |     |      |        |     |
| Last changed 00:04:04 ago, Change count: 1, Ours               |                |               |            |     |      |        |     |
| Summary                                                        | *12.1.1.0      | 10.255.71.242 | 0x80000001 | 288 | 0x20 | 0xfeec | 28  |
| mask 255.255.255.0                                             |                |               |            |     |      |        |     |
| TOS 0x0, metric 1                                              |                |               |            |     |      |        |     |
| Gen timer 00:45:12                                             |                |               |            |     |      |        |     |
| Aging timer 00:55:12                                           |                |               |            |     |      |        |     |
| Installed 00:04:48 ago, expires in 00:55:12, sent 00:04:04 ago |                |               |            |     |      |        |     |



```

Last changed 00:04:48 ago, Change count: 1, Ours
Summary *24.1.1.0      10.255.71.242    0x80000002    248    0x20 0x607e    28
mask 255.255.255.0
TOS 0x0, metric 1
Gen timer 00:45:52
Aging timer 00:55:52
Installed 00:04:08 ago, expires in 00:55:52, sent 00:04:04 ago
Last changed 00:04:48 ago, Change count: 1, Ours
NSSA *33.1.1.1      10.255.71.242    0x80000001    293    0x28 0xe047    36
mask 255.255.255.255
Type 2, TOS 0x0, metric 0, fwd addr 23.1.1.1, tag 0.0.0.0
Gen timer 00:45:07
Aging timer 00:55:07
Installed 00:04:53 ago, expires in 00:55:07, sent 00:04:04 ago
Last changed 00:04:53 ago, Change count: 1, Ours

    OSPF link state database, Area 0.0.0.3
Type      ID      Adv Rtr      Seq      Age  Opt  Cksum  Len
Router  10.255.71.238  10.255.71.238  0x80000003  250  0x20 0x3942  36
bits 0x0, link count 1
id 24.1.1.1, data 24.1.1.2, Type Transit (2)
TOS count 0, TOS 0 metric 1
Aging timer 00:55:50
Installed 00:04:07 ago, expires in 00:55:50
Last changed 00:04:07 ago, Change count: 2
Router *10.255.71.242  10.255.71.242  0x80000003  248  0x20 0xf37d  36
bits 0x3, link count 1
id 24.1.1.1, data 24.1.1.1, Type Transit (2)
TOS count 0, TOS 0 metric 1
Gen timer 00:45:52
Aging timer 00:55:52
Installed 00:04:08 ago, expires in 00:55:52, sent 00:04:06 ago
Last changed 00:04:08 ago, Change count: 2, Ours
Network *24.1.1.1      10.255.71.242    0x80000002    248    0x20 0xc591    32
mask 255.255.255.0
attached router 10.255.71.242
attached router 10.255.71.238
Gen timer 00:45:52
Aging timer 00:55:52
Installed 00:04:08 ago, expires in 00:55:52, sent 00:04:06 ago
Last changed 00:04:08 ago, Change count: 1, Ours
Summary *12.1.1.0      10.255.71.242    0x80000001    288    0x20 0xfeec    28
mask 255.255.255.0
TOS 0x0, metric 1
Gen timer 00:45:12
Aging timer 00:55:12
Installed 00:04:48 ago, expires in 00:55:12, sent 00:04:13 ago
Last changed 00:04:48 ago, Change count: 1, Ours
Summary *23.1.1.0      10.255.71.242    0x80000002    243    0x20 0x6d72    28
mask 255.255.255.0
TOS 0x0, metric 1
Gen timer 00:45:57
Aging timer 00:55:57
Installed 00:04:03 ago, expires in 00:55:57, sent 00:04:01 ago
Last changed 00:04:48 ago, Change count: 1, Ours
NSSA *33.1.1.1      10.255.71.242    0x80000001    293    0x28 0xeb3b    36
mask 255.255.255.255
Type 2, TOS 0x0, metric 0, fwd addr 24.1.1.1, tag 0.0.0.0
Gen timer 00:45:07
Aging timer 00:55:07
Installed 00:04:53 ago, expires in 00:55:07, sent 00:04:13 ago

```



Last changed 00:04:53 ago, Change count: 1, Ours

**show ospf database  
summary**

user@host> show ospf database summary

Area 0.0.0.1:  
2 Router LSAs  
2 Summary LSAs  
1 NSSA LSAs

Area 0.0.0.2:  
2 Router LSAs  
1 Network LSAs  
2 Summary LSAs  
1 NSSA LSAs

Area 0.0.0.3:  
2 Router LSAs  
1 Network LSAs  
2 Summary LSAs  
1 NSSA LSAs

Externals:

Interface fe-2/2/1.0:

Interface ge-0/3/2.0:

Interface so-0/1/2.0:

Interface so-0/1/2.0:



## show (ospf | ospf3) interface

---

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                     | <code>show (ospf   ospf3) interface</code><br><code>&lt;brief   detail   extensive&gt;</code><br><code>&lt;area <i>area-id</i>&gt;</code><br><code>&lt;interface-name&gt;</code><br><code>&lt;instance <i>instance-name</i>&gt;</code><br><code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code><br><code>&lt;realm (ipv4-multicast   ipv4-unicast   ipv6-multicast)&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Syntax (EX Series Switches and QFX Series)</b> | <code>show (ospf   ospf3) interface</code><br><code>&lt;brief   detail   extensive&gt;</code><br><code>&lt;area <i>area-id</i>&gt;</code><br><code>&lt;interface-name&gt;</code><br><code>&lt;instance <i>instance-name</i>&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>                        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>area</b> option introduced in Junos OS Release 9.2.<br><b>area</b> option introduced in Junos OS Release 9.2 for EX Series switches.<br><b>realm</b> option introduced in Junos OS Release 9.2.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>                                | Display the status of OSPF interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                                    | <b>none</b> —Display standard information about the status of all OSPF interfaces for all routing instances<br><br><b>brief   detail   extensive</b> —(Optional) Display the specified level of output.<br><br><b>area <i>area-id</i></b> —(Optional) Display information about the interfaces that belong to the specified area.<br><br><b><i>interface-name</i></b> —(Optional) Display information for the specified interface.<br><br><b>instance <i>instance-name</i></b> —(Optional) Display all OSPF interfaces under the named routing instance.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.<br><br><b>realm (ipv4-multicast   ipv4-unicast   ipv6-multicast)</b> —(OSPFv3 only) (Optional) Display information about the interfaces for the specified OSPFv3 realm, or address family. Use the <b>realm</b> option to specify an address family for OSPFv3 other than IPv6 unicast, which is the default. |
| <b>Required Privilege Level</b>                   | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>List of Sample Output</b>                      | <a href="#">show ospf interface brief on page 3511</a><br><a href="#">show ospf interface detail on page 3511</a><br><a href="#">show ospf3 interface detail on page 3511</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |



[show ospf interface detail \(When Multiarea Adjacency Is Configured\) on page 3511](#)  
[show ospf interface area area-id on page 3512](#)  
[show ospf interface extensive \(When Flooding Reduction Is Enabled\) on page 3512](#)  
[show ospf interface extensive \(When LDP Synchronization Is Configured\) on page 3513](#)

**Output Fields** Table 226 on page 3509 lists the output fields for the **show (ospf | ospf3) interface** command. Output fields are listed in the approximate order in which they appear.

**Table 226: show (ospf | ospf3) interface Output Fields**

| Field Name              | Field Description                                                                                                                                                                                                                 | Level of Output         |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>Interface</b>        | Name of the interface running OSPF version 2 or OSPF version 3.                                                                                                                                                                   | All levels              |
| <b>State</b>            | State of the interface: <b>BDR</b> , <b>Down</b> , <b>DR</b> , <b>DRother</b> , <b>Loop</b> , <b>PtToPt</b> , or <b>Waiting</b> .                                                                                                 | All levels              |
| <b>Area</b>             | Number of the area that the interface is in.                                                                                                                                                                                      | All levels              |
| <b>DR ID</b>            | Address of the area's designated router.                                                                                                                                                                                          | All levels              |
| <b>BDR ID</b>           | Backup designated router for a particular subnet.                                                                                                                                                                                 | All levels              |
| <b>Nbrs</b>             | Number of neighbors on this interface.                                                                                                                                                                                            | All levels              |
| <b>Type</b>             | Type of interface: <b>LAN</b> , <b>NBMA</b> , <b>P2MP</b> , <b>P2P</b> , or <b>Virtual</b> .                                                                                                                                      | <b>detail extensive</b> |
| <b>Address</b>          | IP address of the neighbor.                                                                                                                                                                                                       | <b>detail extensive</b> |
| <b>Mask</b>             | Netmask of the neighbor.                                                                                                                                                                                                          | <b>detail extensive</b> |
| <b>Prefix-length</b>    | (OSPFv3) IPv6 prefix length, in bits.                                                                                                                                                                                             | <b>detail extensive</b> |
| <b>OSPF3-Intf-Index</b> | (OSPFv3) OSPF version 3 interface index.                                                                                                                                                                                          | <b>detail extensive</b> |
| <b>MTU</b>              | Interface maximum transmission unit (MTU).                                                                                                                                                                                        | <b>detail extensive</b> |
| <b>Cost</b>             | Interface cost (metric).                                                                                                                                                                                                          | <b>detail extensive</b> |
| <b>DR addr</b>          | Address of the designated router.                                                                                                                                                                                                 | <b>detail extensive</b> |
| <b>BDR addr</b>         | Address of the backup designated router.                                                                                                                                                                                          | <b>detail extensive</b> |
| <b>Adj count</b>        | Number of adjacent neighbors.                                                                                                                                                                                                     | <b>detail extensive</b> |
| <b>Secondary</b>        | Indicates that this interface is configured as a secondary interface for this area. This interface can belong to more than one area, but can be designated as a primary interface for only one area.                              | <b>detail extensive</b> |
| <b>Flood Reduction</b>  | Indicates that this interface is configured with flooding reduction. All self-originated LSAs from this interface are initially sent with the <b>DoNotAge</b> bit set. As a result, LSAs are refreshed only when a change occurs. | <b>extensive</b>        |



Table 226: show (ospf | ospf3) interface Output Fields (*continued*)

| Field Name                   | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Level of Output  |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Priority                     | Router priority used in designated router (DR) election on this interface.                                                                                                                                                                                                                                                                                                                                                                                          | detail extensive |
| Flood list                   | List of link-state advertisements (LSAs) that might be about to flood this interface.                                                                                                                                                                                                                                                                                                                                                                               | extensive        |
| Ack list                     | Acknowledgment list. List of pending acknowledgments on this interface.                                                                                                                                                                                                                                                                                                                                                                                             | extensive        |
| Descriptor list              | List of packet descriptors.                                                                                                                                                                                                                                                                                                                                                                                                                                         | extensive        |
| Hello                        | Configured value for the hello timer.                                                                                                                                                                                                                                                                                                                                                                                                                               | detail extensive |
| Dead                         | Configured value for the dead timer.                                                                                                                                                                                                                                                                                                                                                                                                                                | detail extensive |
| Auth type                    | (OSPFv2) Authentication mechanism for sending and receiving OSPF protocol packets: <ul style="list-style-type: none"> <li>• <b>MD5</b>—The MD5 mechanism is configured in accordance with RFC 2328.</li> <li>• <b>None</b>—No authentication method is configured.</li> <li>• <b>Password</b>—A simple password (RFC 2328) is configured.</li> </ul>                                                                                                                | detail extensive |
| Topology                     | (Multiarea adjacency) Name of topology: <b>default</b> or <b>name</b> .                                                                                                                                                                                                                                                                                                                                                                                             |                  |
| LDP sync state               | (OSPFv2 and LDP synchronization) Current state of LDP synchronization: <b>in sync</b> , <b>in holddown</b> , and <b>not supported</b> .                                                                                                                                                                                                                                                                                                                             | extensive        |
| reason                       | (OSPFv2 and LDP synchronization) Reason for the current state of LDP synchronization. The LDP session might be up or down, or adjacency might be up or down.                                                                                                                                                                                                                                                                                                        | extensive        |
| config holdtime              | (OSPFv2 and LDP synchronization) Configured value of the hold timer.<br><br>If the state is not synchronized, and the hold time is not infinity, the <b>remaining</b> field displays the number of seconds that remain until the configured hold timer expires.                                                                                                                                                                                                     | extensive        |
| IPSec SA name                | (OSPFv2) Name of the IPSec security association name.                                                                                                                                                                                                                                                                                                                                                                                                               | detail extensive |
| Active key ID                | (OSPFv2 and MD5) Number from <b>0</b> to <b>255</b> that uniquely identifies an MD5 key.                                                                                                                                                                                                                                                                                                                                                                            | detail extensive |
| Start time                   | (OSPFv2 and MD5) Time at which the routing device starts using an MD5 key to authenticate OSPF packets transmitted on the interface on which this key is configured. To authenticate received OSPF protocol packets, the key becomes effective immediately after the configuration is committed. If the start time option is not configured, the key is effective immediately for send and receive and is displayed as <b>Start time 1970 Jan 01 00:00:00 PST</b> . | detail extensive |
| ReXmit                       | Configured value for the Retransmit timer.                                                                                                                                                                                                                                                                                                                                                                                                                          | detail extensive |
| Stub, Not Stub, or Stub NSSA | Type of area.                                                                                                                                                                                                                                                                                                                                                                                                                                                       | detail extensive |



## Sample Output

### show ospf interface brief

```
user@host> show ospf interface brief
```

| Intf       | State  | Area    | DR ID        | BDR ID       | Nbrs |
|------------|--------|---------|--------------|--------------|------|
| at-5/1/0.0 | PtToPt | 0.0.0.0 | 0.0.0.0      | 0.0.0.0      | 1    |
| ge-2/3/0.0 | DR     | 0.0.0.0 | 192.168.4.16 | 192.168.4.15 | 1    |
| lo0.0      | DR     | 0.0.0.0 | 192.168.4.16 | 0.0.0.0      | 0    |
| so-0/0/0.0 | Down   | 0.0.0.0 | 0.0.0.0      | 0.0.0.0      | 0    |
| so-6/0/1.0 | PtToPt | 0.0.0.0 | 0.0.0.0      | 0.0.0.0      | 1    |
| so-6/0/2.0 | Down   | 0.0.0.0 | 0.0.0.0      | 0.0.0.0      | 0    |
| so-6/0/3.0 | PtToPt | 0.0.0.0 | 0.0.0.0      | 0.0.0.0      | 1    |

### show ospf interface detail

```
user@host> show ospf interface detail
```

| Interface  | State | Area    | DR ID         | BDR ID         | Nbrs |
|------------|-------|---------|---------------|----------------|------|
| fe-0/0/1.0 | BDR   | 0.0.0.0 | 192.168.37.12 | 10.255.245.215 | 1    |

Type LAN, address 192.168.37.11, Mask 255.255.255.248, MTU 4460, Cost 40  
DR addr 192.168.37.12, BDR addr 192.168.37.11, Adj count 1, Priority 128  
Hello 10, Dead 40, ReXmit 5, Not Stub

| Interface  | State  | Area    | DR ID   | BDR ID  | Nbrs |
|------------|--------|---------|---------|---------|------|
| tl-0/2/1.0 | PtToPt | 0.0.0.0 | 0.0.0.0 | 0.0.0.0 | 0    |

Type P2P, Address 0.0.0.0, Mask 0.0.0.0, MTU 1500, Cost 2604  
Adj count 0  
Hello 10, Dead 40, ReXmit 5, Not Stub  
Auth type: MD5, Active key ID 3, Start time 2002 Nov 19 10:00:00 PST  
IPsec SA Name: sa

### show ospf3 interface detail

```
user@host> show ospf3 interface so-0/0/3.0 detail
```

| Interface  | State  | Area    | DR-ID   | BDR-ID  | Nbrs |
|------------|--------|---------|---------|---------|------|
| so-0/0/3.0 | PtToPt | 0.0.0.0 | 0.0.0.0 | 0.0.0.0 | 1    |

Address fe80::2a0:a5ff:fe28:1dfc, Prefix-length 64  
OSPF3-Intf-index 1, Type P2P, MTU 4470, Cost 12, Adj-count 1  
Hello 10, Dead 40, ReXmit 5, Not Stub

### show ospf interface detail (When Multiarea Adjacency Is Configured)

```
user@host> show ospf interface detail
```

```
regress@router> show ospf interface detail
```

| Interface | State | Area    | DR ID        | BDR ID  | Nbrs |
|-----------|-------|---------|--------------|---------|------|
| lo0.0     | DR    | 0.0.0.0 | 10.255.245.2 | 0.0.0.0 | 0    |

Type: LAN, Address: 127.0.0.1, Mask: 255.255.255.255, MTU: 65535, Cost: 0  
DR addr: 127.0.0.1, Adj count: 0, Priority: 128  
Hello: 10, Dead: 40, ReXmit: 5, Not Stub  
Auth type: None  
Topology default (ID 0) -> Cost: 0

| Interface | State | Area    | DR ID        | BDR ID  | Nbrs |
|-----------|-------|---------|--------------|---------|------|
| lo0.0     | DR    | 0.0.0.0 | 10.255.245.2 | 0.0.0.0 | 0    |

Type: LAN, Address: 10.255.245.2, Mask: 255.255.255.255, MTU: 65535, Cost: 0  
DR addr: 10.255.245.2, Adj count: 0, Priority: 128  
Hello: 10, Dead: 40, ReXmit: 5, Not Stub  
Auth type: None  
Topology default (ID 0) -> Cost: 0

| Interface  | State  | Area    | DR ID   | BDR ID  | Nbrs |
|------------|--------|---------|---------|---------|------|
| so-0/0/0.0 | PtToPt | 0.0.0.0 | 0.0.0.0 | 0.0.0.0 | 1    |

Type: P2P, Address: 0.0.0.0, Mask: 0.0.0.0, MTU: 4470, Cost: 1  
Adj count: 1  
Hello: 10, Dead: 40, ReXmit: 5, Not Stub  
Auth type: None  
Topology default (ID 0) -> Cost: 1

| Interface  | State  | Area    | DR ID   | BDR ID  | Nbrs |
|------------|--------|---------|---------|---------|------|
| so-0/0/0.0 | PtToPt | 0.0.0.0 | 0.0.0.0 | 0.0.0.0 | 0    |



```

Type: P2P, Address: 192.168.37.46, Mask: 255.255.255.254, MTU: 4470, Cost: 1
Adj count: 0, , Passive
Hello: 10, Dead: 40, ReXmit: 5, Not Stub
Auth type: None
Topology default (ID 0) -> Passive, Cost: 1
so-1/0/0.0      PtToPt  0.0.0.0      0.0.0.0      0.0.0.0      1

Type: P2P, Address: 0.0.0.0, Mask: 0.0.0.0, MTU: 4470, Cost: 1
Adj count: 1
Hello: 10, Dead: 40, ReXmit: 5, Not Stub
Auth type: None
Topology default (ID 0) -> Cost: 1
so-1/0/0.0      PtToPt  0.0.0.0      0.0.0.0      0.0.0.0      0

Type: P2P, Address: 192.168.37.54, Mask: 255.255.255.254, MTU: 4470, Cost: 1
Adj count: 0, , Passive
Hello: 10, Dead: 40, ReXmit: 5, Not Stub
Auth type: None
Topology default (ID 0) -> Passive, Cost: 1
so-0/0/0.0      PtToPt  1.1.1.1      0.0.0.0      0.0.0.0      1

Type: P2P, Address: 0.0.0.0, Mask: 0.0.0.0, MTU: 4470, Cost: 1
Adj count: 1, Secondary
Hello: 10, Dead: 40, ReXmit: 5, Not Stub
Auth type: None
Topology default (ID 0) -> Cost: 1
so-1/0/0.0      PtToPt  1.1.1.1      0.0.0.0      0.0.0.0      1

Type: P2P, Address: 0.0.0.0, Mask: 0.0.0.0, MTU: 4470, Cost: 1
Adj count: 1, Secondary
Hello: 10, Dead: 40, ReXmit: 5, Not Stub
Auth type: None
Topology default (ID 0) -> Cost: 1
so-0/0/0.0      PtToPt  2.2.2.2      0.0.0.0      0.0.0.0      1

Type: P2P, Address: 0.0.0.0, Mask: 0.0.0.0, MTU: 4470, Cost: 1
Adj count: 1, Secondary
Hello: 10, Dead: 40, ReXmit: 5, Not Stub
Auth type: None
Topology default (ID 0) -> Cost: 1
so-1/0/0.0      PtToPt  2.2.2.2      0.0.0.0      0.0.0.0      1

Type: P2P, Address: 0.0.0.0, Mask: 0.0.0.0, MTU: 4470, Cost: 1
Adj count: 1, Secondary
Hello: 10, Dead: 40, ReXmit: 5, Not Stub
Auth type: None
Topology default (ID 0) -> Cost: 1

```

#### show ospf interface area area-id

```

user@host> show ospf interface area 1.1.1.1
Interface      State  Area      DR ID      BDR ID      Nbrs
so-0/0/0.0     PtToPt 1.1.1.1   0.0.0.0    0.0.0.0     1
so-1/0/0.0     PtToPt 1.1.1.1   0.0.0.0    0.0.0.0     1

```

#### show ospf interface extensive (When Flooding Reduction Is Enabled)

```

user@host> show ospf interface extensive
Interface      State  Area      DR ID      BDR ID      Nbrs
fe-0/0/0.0     PtToPt 0.0.0.0    0.0.0.0    0.0.0.0     0

Type: P2P, Address: 10.10.10.1, Mask: 255.255.255.0, MTU: 1500, Cost: 1
Adj count: 0

```



Secondary, Flood Reduction  
Hello: 10, Dead: 40, ReXmit: 5, Not Stub  
Auth type: None  
Topology default (ID 0) -> Cost: 1

**show ospf interface  
extensive  
(When LDP  
Synchronization Is  
Configured)**

```
user@host> show ospf interface extensive
Interface          State      Area          DR ID          BDR ID
Nbrs
so-1/0/3.0         Down       0.0.0.0       0.0.0.0       0.0.0.0
0
  Type: P2P, Address: 0.0.0.0, Mask: 0.0.0.0, MTU: 4470, Cost: 65535
  Adj count: 0
  Hello: 10, Dead: 40, ReXmit: 5, Not Stub
  Auth type: None
  LDP sync state: in holddown, for: 00:00:08, reason: LDP down during config
                    config holdtime: 10 seconds, remaining: 1
```



## show (ospf | ospf3) io-statistics

|                                                 |                                                                                                                                                                                                                          |
|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                   | show (ospf   ospf3) io-statistics<br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                |
| <b>Syntax (EX Series Switch and QFX Series)</b> | show (ospf   ospf3) io-statistics                                                                                                                                                                                        |
| <b>Release Information</b>                      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                 |
| <b>Description</b>                              | Display Open Shortest Path First (OSPF) input and output statistics.                                                                                                                                                     |
| <b>Options</b>                                  | <p><b>none</b>—Display OSPF input and output statistics.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                 | view                                                                                                                                                                                                                     |
| <b>Related Documentation</b>                    | <ul style="list-style-type: none"> <li><a href="#">clear (ospf   ospf3) statistics on page 3489</a></li> </ul>                                                                                                           |
| <b>List of Sample Output</b>                    | <a href="#">show ospf io-statistics on page 3515</a>                                                                                                                                                                     |
| <b>Output Fields</b>                            | Table 227 on page 3514 lists the output fields for the <b>show ospf io-statistics</b> command. Output fields are listed in the approximate order in which they appear.                                                   |

**Table 227: show (ospf | ospf3) io-statistics Output Fields**

| Field Name             | Field Description                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>Packets read</b>    | Number of OSPF packets read since the last time the routing protocol was started.                         |
| <b>average per run</b> | Total number of packets divided by the total number of times the OSPF read operation is scheduled to run. |
| <b>max run</b>         | Maximum number of packets for a given run among all scheduled runs.                                       |
| <b>Receive errors</b>  | Number of faulty packets received with errors.                                                            |



## Sample Output

```
show ospf io-statistics  user@host> show ospf io-statistics

Packets read: 7361, average per run: 1.00, max run: 1
Receive errors:
  None
```



## show (ospf | ospf3) log

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                   | show (ospf   ospf3) log<br><instance <i>instance-name</i> ><br><logical-system (all   <i>logical-system-name</i> )><br><realm (ipv4-multicast   ipv4-unicast   ipv6-multicast)><br><topology <i>topology-name</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Syntax (EX Series Switch and QFX Series)</b> | show (ospf   ospf3) log<br><instance <i>instance-name</i> ><br><topology <i>topology-name</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>                      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>topology</b> option introduced in Junos OS Release 9.0.<br><b>topology</b> option introduced in Junos OS Release 9.0 for EX Series switches.<br><b>realm</b> option introduced in Junos OS Release 9.2.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>                              | Display the entries in the Open Shortest Path First (OSPF) log of SPF calculations.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                                  | <p><b>none</b>—Display entries in the OSPF log of SPF calculations for all routing instances.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display entries for the specified routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>topology <i>topology-name</i></b>—(Optional) (OSPFv2 only) Display entries for the specified topology.</p> <p><b>realm (ipv4-multicast   ipv4-unicast   ipv6-multicast)</b>—(OSPFv3 only) (Optional) Display entries for the specified OSPFv3 realm, or address family. Use the <b>realm</b> option to specify an address family for OSPFv3 other than IPv6 unicast, which is the default.</p> |
| <b>Required Privilege Level</b>                 | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>List of Sample Output</b>                    | <a href="#">show ospf log on page 3518</a><br><a href="#">show ospf log topology voice on page 3518</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Output Fields</b>                            | Table 228 on page 3516 lists the output fields for the <b>show (ospf   ospf3) log</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

**Table 228: show (ospf | ospf3) log Output Fields**

| Field Name  | Field Description                                                                      |
|-------------|----------------------------------------------------------------------------------------|
| <b>When</b> | Time, in weeks ( <b>w</b> ) and days ( <b>d</b> ), since the SPF calculation was made. |



Table 228: show (ospf | ospf3) log Output Fields (*continued*)

| Field Name | Field Description                                                                                                                                                                   |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type       | Type of calculation: <b>Cleanup</b> , <b>External</b> , <b>Interarea</b> , <b>NSSA</b> , <b>Redist</b> , <b>SPF</b> , <b>Stub</b> , <b>Total</b> , or <b>Virtuallink</b> .          |
| Elapsed    | Amount of time, in seconds, that elapsed during the operation, or the time required to complete the SPF calculation. The start time is the time displayed in the <b>When</b> field. |



## Sample Output

### show ospf log

```
user@host> show ospf log
When              Type              Elapsed

1w4d 17:25:58     Stub              0.000017
1w4d 17:25:58     SPF               0.000070
1w4d 17:25:58     Stub              0.000019
1w4d 17:25:58     Interarea         0.000054
1w4d 17:25:58     External          0.000005
1w4d 17:25:58     Cleanup           0.000203
1w4d 17:25:58     Total             0.000537
1w4d 17:24:48     SPF               0.000125
1w4d 17:24:48     Stub              0.000017
1w4d 17:24:48     SPF               0.000100
1w4d 17:24:48     Stub              0.000016
1w4d 17:24:48     Interarea         0.000056
1w4d 17:24:48     External          0.000005
1w4d 17:24:48     Cleanup           0.000238
1w4d 17:24:48     Total             0.000600
...
```

### show ospf log topology voice

```
user@host> show ospf log topology voice
Topology voice SPF log:
```

#### Last instance of each event type

| When     | Type      | Elapsed  |
|----------|-----------|----------|
| 00:06:11 | SPF       | 0.000116 |
| 00:06:11 | Stub      | 0.000114 |
| 00:06:11 | Interarea | 0.000126 |
| 00:06:11 | External  | 0.000067 |
| 00:06:11 | NSSA      | 0.000037 |
| 00:06:11 | Cleanup   | 0.000186 |

#### Maximum length of each event type

| When     | Type      | Elapsed  |
|----------|-----------|----------|
| 00:13:43 | SPF       | 0.000140 |
| 00:13:33 | Stub      | 0.000116 |
| 00:13:43 | Interarea | 0.000128 |
| 00:13:33 | External  | 0.000075 |
| 00:13:38 | NSSA      | 0.000039 |
| 00:13:53 | Cleanup   | 0.000657 |

#### Last 100 events

| When     | Type      | Elapsed  |
|----------|-----------|----------|
| 00:13:53 | SPF       | 0.000090 |
| 00:13:53 | Stub      | 0.000041 |
| 00:13:53 | Interarea | 0.000123 |
| 00:13:53 | External  | 0.000040 |
| 00:13:53 | NSSA      | 0.000038 |
| 00:13:53 | Cleanup   | 0.000657 |
| 00:13:53 | Total     | 0.001252 |
| .        |           |          |
| .        |           |          |
| 00:06:11 | SPF       | 0.000116 |
| 00:06:11 | Stub      | 0.000114 |
| 00:06:11 | Interarea | 0.000126 |
| 00:06:11 | External  | 0.000067 |



|          |         |          |
|----------|---------|----------|
| 00:06:11 | NSSA    | 0.000037 |
| 00:06:11 | Cleanup | 0.000186 |
| 00:06:11 | Total   | 0.000818 |



## show (ospf | ospf3) neighbor

---

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                     | <pre>show (ospf   ospf3) neighbor &lt;brief   detail   extensive&gt; &lt;area <i>area-id</i>&gt; &lt;instance (all   <i>instance-name</i>)&gt; &lt;interface <i>interface-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;neighbor&gt; &lt;realm (ipv4-multicast   ipv4-unicast   ipv6-multicast)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Syntax (EX Series Switches and QFX Series)</b> | <pre>show (ospf   ospf3) neighbor &lt;brief   detail   extensive&gt; &lt;area <i>area-id</i>&gt; &lt;instance (all   <i>instance-name</i>)&gt; &lt;interface <i>interface-name</i>&gt; &lt;neighbor&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>                        | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>instance all</b> option introduced in Junos OS Release 9.1.</p> <p><b>instance all</b> option introduced in Junos OS Release 9.1 for EX Series switches.</p> <p><b>area</b>, <b>interface</b>, and <b>realm</b> options introduced in Junos OS Release 9.2.</p> <p><b>area</b> and <b>interface</b> options introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                      |
| <b>Description</b>                                | <p>Display information about OSPF neighbors.</p> <p>CPU utilization might increase while the device learns its OSPF neighbors. We recommend that you use the <b>show (ospf   ospf3) neighbor</b> command after the device learns and establishes OSPF neighbor adjacencies. Depending on the size of your network, this might take several minutes. If you receive a “timeout communicating with routing daemon” error when using the <b>show (ospf   ospf3) neighbor</b> command, wait several minutes before attempting to use the command again. This is not a critical system error, but you might experience a delay in using the CLI.</p>                                                                                                                               |
| <b>Options</b>                                    | <p><b>none</b>—Display standard information about all OSPF neighbors for all routing instances.</p> <p><b>brief   detail   extensive</b>—(Optional) Display the specified level of output.</p> <p><b>area <i>area-id</i></b>—(Optional) Display information about the OSPF neighbors for the specified area.</p> <p><b>instance (all   <i>instance-name</i>)</b>—(Optional) Display all OSPF interfaces for all routing instances or under the named routing instance.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Display information about OSPF neighbors for the specified logical interface.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |



**neighbor**—(Optional) Display information about the specified OSPF neighbor.

**realm (ipv4-multicast | ipv4-unicast | ipv6-multicast)**—(OSPFv3 only) (Optional) Display information about the OSPF neighbors for the specified OSPFv3 realm, or address family. Use the **realm** option to specify an address family for OSPFv3 other than IPv6 unicast, which is the default.

**Required Privilege Level** view

**Related Documentation**

- [clear \(ospf | ospf3\) neighbor on page 3487](#)

**List of Sample Output**

- [show ospf neighbor brief on page 3524](#)
- [show ospf neighbor detail on page 3524](#)
- [show ospf neighbor extensive on page 3524](#)
- [show ospf3 neighbor detail on page 3525](#)
- [show ospf neighbor area area-id on page 3525](#)
- [show ospf neighbor interface interface-name on page 3525](#)
- [show ospf3 neighbor instance all \(OSPFv3 Multiple Family Address Support Enabled\) on page 3526](#)

**Output Fields** [Table 229 on page 3521](#) lists the output fields for the **show (ospf | ospf3) neighbor** command. Output fields are listed in the approximate order in which they appear.

**Table 229: show (ospf | ospf3) neighbor Output Fields**

| Field Name       | Field Description                                  | Level of Output |
|------------------|----------------------------------------------------|-----------------|
| <b>Address</b>   | Address of the neighbor.                           | All levels      |
| <b>Interface</b> | Interface through which the neighbor is reachable. | All levels      |



Table 229: show (ospf | ospf3) neighbor Output Fields (continued)

| Field Name                            | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Level of Output         |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>State</b>                          | <p>State of the neighbor:</p> <ul style="list-style-type: none"> <li>• <b>Attempt</b>—Valid only for neighbors attached to nonbroadcast networks. It indicates that no recent information has been received from the neighbor, but that a more concerted effort must be made to contact the neighbor.</li> <li>• <b>Down</b>—Initial state of a neighbor conversation. It indicates that no recent information has been received from the neighbor. Hello packets might continue to be sent to neighbors in the <b>Down</b> state, although at a reduced frequency.</li> <li>• <b>Exchange</b>—Routing device is describing its entire link-state database by sending database description packets to the neighbor. Each packet has a sequence number and is explicitly acknowledged.</li> <li>• <b>ExStart</b>—First step in creating an adjacency between the two neighboring routing devices. The goal of this step is to determine which routing device is the master, and to determine the initial sequence number.</li> <li>• <b>Full</b>—Neighboring routing devices are fully adjacent. These adjacencies appear in router link and network link advertisements.</li> <li>• <b>Init</b>—A hello packet has recently been sent by the neighbor. However, bidirectional communication has not yet been established with the neighbor. This state might occur, for example, because the routing device itself did not appear in the neighbor's hello packet.</li> <li>• <b>Loading</b>—Link-state request packets are sent to the neighbor to acquire more recent advertisements that have been discovered (but not yet received) in the <b>Exchange</b> state.</li> <li>• <b>2Way</b>—Communication between the two routing devices is bidirectional. This state has been ensured by the operation of the Hello Protocol. This is the most advanced state short of beginning adjacency establishment. The (backup) designated router is selected from the set of neighbors in state <b>2Way</b> or greater.</li> </ul> | All levels              |
| <b>ID</b>                             | Router ID of the neighbor.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | All levels              |
| <b>Pri</b>                            | Priority of the neighbor to become the designated router.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | All levels              |
| <b>Dead</b>                           | Number of seconds until the neighbor becomes unreachable.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | All levels              |
| <b>Link state acknowledgment list</b> | Number of link-state acknowledgments received.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>extensive</b>        |
| <b>Link state retransmission list</b> | <p>Total number of link-state advertisements retransmitted. For <b>extensive</b> output only, the following information is also displayed:</p> <ul style="list-style-type: none"> <li>• <b>Type</b>—Type of link advertisement: <b>ASBR</b>, <b>Sum</b>, <b>Extern</b>, <b>Network</b>, <b>NSSA</b>, <b>OpaqArea</b>, <b>Router</b>, or <b>Summary</b>.</li> <li>• <b>LSA ID</b>—LSA identifier included in the advertisement. An asterisk preceding the identifier marks database entries that originated from the local routing device.</li> <li>• <b>Adv rtr</b>—Address of the routing device that sent the advertisement.</li> <li>• <b>Seq</b>—Link sequence number of the advertisement.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>detail extensive</b> |



Table 229: show (ospf | ospf3) neighbor Output Fields (*continued*)

| Field Name              | Field Description                                                                                                                                                                                                                | Level of Output         |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>Neighbor-address</b> | (OSPFv3 only) If the neighbor uses virtual links, the <b>Neighbor-address</b> is the site-local, local, or global address. If the neighbor uses a physical interface, the <b>Neighbor-address</b> is an IPv6 link-local address. | <b>detail extensive</b> |
| <b>area</b>             | Area that the neighbor is in.                                                                                                                                                                                                    | <b>detail extensive</b> |
| <b>OSPF3-Intf-Index</b> | (OSPFv3 only) Displays the OSPFv3 interface index.                                                                                                                                                                               | <b>detail extensive</b> |
| <b>opt</b>              | Option bits received in the hello packets from the neighbor.                                                                                                                                                                     | <b>detail extensive</b> |
| <b>DR or DR-ID</b>      | Address of the designated router.                                                                                                                                                                                                | <b>detail extensive</b> |
| <b>BDR or BDR-ID</b>    | Address of the backup designated router.                                                                                                                                                                                         | <b>detail extensive</b> |
| <b>Up</b>               | Length of time since the neighbor came up.                                                                                                                                                                                       | <b>detail extensive</b> |
| <b>adjacent</b>         | Length of time since the adjacency with the neighbor was established.                                                                                                                                                            | <b>detail extensive</b> |



## Sample Output

### show ospf neighbor brief

```
user@host> show ospf neighbor brief
```

| Address         | Intf   | State | ID            | Pri | Dead |
|-----------------|--------|-------|---------------|-----|------|
| 192.168.254.225 | fxp3.0 | 2Way  | 10.250.240.32 | 128 | 36   |
| 192.168.254.230 | fxp3.0 | Full  | 10.250.240.8  | 128 | 38   |
| 192.168.254.229 | fxp3.0 | Full  | 10.250.240.35 | 128 | 33   |
| 10.1.1.129      | fxp2.0 | Full  | 10.250.240.12 | 128 | 37   |
| 10.1.1.131      | fxp2.0 | Full  | 10.250.240.11 | 128 | 38   |
| 10.1.2.1        | fxp1.0 | Full  | 10.250.240.9  | 128 | 32   |
| 10.1.2.81       | fxp0.0 | Full  | 10.250.240.10 | 128 | 33   |

### show ospf neighbor detail

```
user@host> show ospf neighbor detail
```

| Address                                             | Interface   | State   | ID        | Pri | Dead |
|-----------------------------------------------------|-------------|---------|-----------|-----|------|
| 10.5.1.2                                            | ge-1/2/0.1  | Full    | 10.5.1.2  | 128 | 37   |
| area 0.0.0.1, opt 0x42, DR 10.5.1.2, BDR 10.5.1.1   |             |         |           |     |      |
| Up 06:09:28, adjacent 05:17:36                      |             |         |           |     |      |
| Link state acknowledgment list: 3 entries           |             |         |           |     |      |
| Link state retransmission list: 9 entries           |             |         |           |     |      |
| 10.5.10.2                                           | ge-1/2/0.10 | ExStart | 10.5.1.38 | 128 | 34   |
| area 0.0.0.1, opt 0x42, DR 10.5.10.2, BDR 10.5.10.1 |             |         |           |     |      |
| Up 06:09:28                                         |             |         |           |     |      |
| master, seq 0xac1530f8, rexmit DBD in 3 sec         |             |         |           |     |      |
| rexmit LSREQ in 0 sec                               |             |         |           |     |      |
| 10.5.11.2                                           | ge-1/2/0.11 | Full    | 10.5.1.42 | 128 | 38   |
| area 0.0.0.1, opt 0x42, DR 10.5.11.2, BDR 10.5.11.1 |             |         |           |     |      |
| Up 06:09:28, adjacent 05:26:46                      |             |         |           |     |      |
| Link state retransmission list: 1 entries           |             |         |           |     |      |
| 10.5.12.2                                           | ge-1/2/0.12 | ExStart | 10.5.1.46 | 128 | 33   |
| area 0.0.0.1, opt 0x42, DR 10.5.12.2, BDR 10.5.12.1 |             |         |           |     |      |
| Up 06:09:28                                         |             |         |           |     |      |
| master, seq 0xac188a68, rexmit DBD in 2 sec         |             |         |           |     |      |
| rexmit LSREQ in 0 sec                               |             |         |           |     |      |

### show ospf neighbor extensive

```
user@host> show ospf neighbor extensive
```

| Address                                           | Interface  | State        | ID         | Pri | Dead |
|---------------------------------------------------|------------|--------------|------------|-----|------|
| 10.5.1.2                                          | ge-1/2/0.1 | Full         | 10.5.1.2   | 128 | 33   |
| area 0.0.0.1, opt 0x42, DR 10.5.1.2, BDR 10.5.1.1 |            |              |            |     |      |
| Up 06:09:42, adjacent 05:17:50                    |            |              |            |     |      |
| Link state retransmission list:                   |            |              |            |     |      |
| Type                                              | LSA ID     | Adv rtr      | Seq        |     |      |
| Summary                                           | 10.8.56.0  | 172.25.27.82 | 0x8000004d |     |      |
| Router                                            | 10.5.1.94  | 10.5.1.94    | 0x8000005c |     |      |
| Network                                           | 10.5.24.2  | 10.5.1.94    | 0x80000036 |     |      |
| Summary                                           | 10.8.57.0  | 172.25.27.82 | 0x80000024 |     |      |
| Extern                                            | 1.10.90.0  | 10.8.1.2     | 0x80000041 |     |      |
| Extern                                            | 1.4.109.0  | 10.6.1.2     | 0x80000041 |     |      |



|                                                     |             |              |            |     |    |
|-----------------------------------------------------|-------------|--------------|------------|-----|----|
| Router                                              | 10.5.1.190  | 10.5.1.190   | 0x8000005f |     |    |
| Network                                             | 10.5.48.2   | 10.5.1.190   | 0x8000003d |     |    |
| Summary                                             | 10.8.58.0   | 172.25.27.82 | 0x8000004d |     |    |
| Extern                                              | 1.10.91.0   | 10.8.1.2     | 0x80000041 |     |    |
| Extern                                              | 1.4.110.0   | 10.6.1.2     | 0x80000041 |     |    |
| Router                                              | 10.5.1.18   | 10.5.1.18    | 0x8000005f |     |    |
| Network                                             | 10.5.5.2    | 10.5.1.18    | 0x80000033 |     |    |
| Summary                                             | 10.8.59.0   | 172.25.27.82 | 0x8000003a |     |    |
| Summary                                             | 10.8.62.0   | 172.25.27.82 | 0x80000025 |     |    |
| 10.5.10.2                                           | ge-1/2/0.10 | ExStart      | 10.5.1.38  | 128 | 38 |
| area 0.0.0.1, opt 0x42, DR 10.5.10.2, BDR 10.5.10.1 |             |              |            |     |    |
| Up 06:09:42                                         |             |              |            |     |    |
| master, seq 0xac1530f8, retransmit DBD in 2 sec     |             |              |            |     |    |
| retransmit LSREQ in 0 sec                           |             |              |            |     |    |
| 10.5.11.2                                           | ge-1/2/0.11 | Full         | 10.5.1.42  | 128 | 33 |
| area 0.0.0.1, opt 0x42, DR 10.5.11.2, BDR 10.5.11.1 |             |              |            |     |    |
| Up 06:09:42, adjacent 05:27:00                      |             |              |            |     |    |
| Link state retransmission list:                     |             |              |            |     |    |
| Type                                                | LSA ID      | Adv rtr      | Seq        |     |    |
| Summary                                             | 10.8.58.0   | 172.25.27.82 | 0x8000004d |     |    |
| Extern                                              | 1.10.91.0   | 10.8.1.2     | 0x80000041 |     |    |
| Extern                                              | 1.1.247.0   | 10.5.1.2     | 0x8000003f |     |    |
| Extern                                              | 1.4.110.0   | 10.6.1.2     | 0x80000041 |     |    |
| Router                                              | 10.5.1.18   | 10.5.1.18    | 0x8000005f |     |    |
| Network                                             | 10.5.5.2    | 10.5.1.18    | 0x80000033 |     |    |
| Summary                                             | 10.8.59.0   | 172.25.27.82 | 0x8000003a |     |    |

### show ospf3 neighbor detail

```

user@host> show ospf3 neighbor detail
ID          Interface          State    Pri    Dead
10.255.71.13 fe-0/0/2.0          Full     128    30
Neighbor-address fe80::290:69ff:fe9b:e002
area 0.0.0.0, opt 0x13, OSPF3-Intf-Index 2
DR-ID 10.255.71.13, BDR-ID 10.255.71.12
Up 02:51:43, adjacent 02:51:43

```

### show ospf neighbor area area-id

```

user@host >show ospf neighbor area 1.1.1.1
Address      Interface          State    ID          Pri    Dead
192.168.37.47 so-0/0/0.0          Full     10.255.245.4 128    33
Area 1.1.1.1
192.168.37.55 so-1/0/0.0          Full     10.255.245.5 128    37
Area 1.1.1.1

```



**show ospf neighbor  
interface  
interface-name**

```
user@host > show ospf neighbor interface so-0/0/0.0
Address      Interface      State      ID            Pri    Dead
192.168.37.47 so-0/0/0.0      Full       10.255.245.4  128    37
Area 0.0.0.0
192.168.37.47 so-0/0/0.0      Full       10.255.245.4  128    33
Area 1.1.1.1
192.168.37.47 so-0/0/0.0      Full       10.255.245.4  128    32
Area 2.2.2.2
```

**show ospf3 neighbor  
instance all (OSPFv3  
Multiple Family  
Address Support  
Enabled)**

```
user @host > show ospf3 neighbor instance all
Instance: ina
  Realm: ipv6-unicast
    ID      Interface      State      Pri    Dead
    100.1.1.1 fe-0/0/2.0      Full       128    37
    Neighbor-address fe80::217:cb00:c87c:8c03
  Instance: inb
  Realm: ipv4-unicast
    ID      Interface      State      Pri    Dead
    100.1.2.1 fe-0/0/2.1      Full       128    33
    Neighbor-address fe80::217:cb00:c97c:8c03
```



## show (ospf | ospf3) overview

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <b>Syntax</b>                                   | <pre>show (ospf   ospf3) overview &lt;brief   extensive&gt; &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;realm (ipv4-multicast   ipv4-unicast   ipv6-multicast)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |
| <b>Syntax (EX Series Switch and QFX Series)</b> | <pre>show (ospf   ospf3) overview &lt;brief   extensive&gt; &lt;instance <i>instance-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
| <b>Release Information</b>                      | <p>Command introduced in Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>realm</b> option introduced in Junos OS Release 9.2.</p> <p>Database protection introduced in Junos 10.2.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
| <b>Description</b>                              | Display Open Shortest Path First (OSPF) overview information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |
| <b>Options</b>                                  | <p><b>none</b>—Display standard information about all OSPF neighbors for all routing instances.</p> <p><b>brief   extensive</b>—(Optional) Display the specified level of output.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display all OSPF interfaces under the named routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>realm (ipv4-multicast   ipv4-unicast   ipv6-multicast)</b>—(Optional) (OSPFv3 only) Display information about the specified OSPFv3 realm, or address family. Use the <b>realm</b> option to specify an address family for OSPFv3 other than IPv6 unicast, which is the default.</p> |  |
| <b>Required Privilege Level</b>                 | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |
| <b>List of Sample Output</b>                    | <p><a href="#">show ospf overview on page 3530</a></p> <p><a href="#">show ospf overview (With Database Protection) on page 3530</a></p> <p><a href="#">show ospf3 overview (With Database Protection) on page 3530</a></p> <p><a href="#">show ospf overview extensive on page 3531</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |
| <b>Output Fields</b>                            | <p><a href="#">Table 143 on page 1859</a> lists the output fields for the <b>show ospf overview</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |

Table 230: show ospf overview Output Fields

| Field name | Field Description      | Level of Output |
|------------|------------------------|-----------------|
| Instance   | OSPF routing instance. | All levels      |



Table 230: show ospf overview Output Fields (*continued*)

| Field name                       | Field Description                                                                                                                                                                        | Level of Output |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Router ID</b>                 | Router ID of the routing device.                                                                                                                                                         | All levels      |
| <b>Route table index</b>         | Route table index.                                                                                                                                                                       | All levels      |
| <b>Configured overload</b>       | Overload capability is enabled. If the overload timer is also configured, display the time that remains before it is set to expire. This field is not displayed after the timer expires. | All levels      |
| <b>Topology</b>                  | Topology identifier.                                                                                                                                                                     | All levels      |
| <b>Prefix export count</b>       | Number of prefixes exported into OSPF.                                                                                                                                                   | All levels      |
| <b>Full SPF runs</b>             | Number of complete Shortest Path First calculations.                                                                                                                                     | All levels      |
| <b>SPF delay</b>                 | Delay before performing consecutive Shortest Path First calculations.                                                                                                                    | All levels      |
| <b>SPF holddown</b>              | Delay before performing additional Shortest Path First (SPF) calculations after the maximum number of consecutive SPF calculations is reached.                                           | All levels      |
| <b>SPF rapid runs</b>            | Maximum number of Shortest Path First calculations that can be performed in succession before the hold-down timer begins.                                                                | All levels      |
| <b>LSA refresh time</b>          | Refresh period for link-state advertisement (in minutes).                                                                                                                                | All levels      |
| <b>Database protection state</b> | Current state of database protection.                                                                                                                                                    | All levels      |
| <b>Warning threshold</b>         | Threshold at which a warning message is logged (percentage of maximum LSA count).                                                                                                        | All levels      |
| <b>Non self-generated LSAs</b>   | Number of LSAs whose router ID is not equal to the local router ID: <b>Current</b> , <b>Warning</b> (threshold), and <b>Allowed</b> .                                                    | All levels      |
| <b>Ignore time</b>               | How long the database has been in the ignore state.                                                                                                                                      | All levels      |
| <b>Reset time</b>                | How long the database must stay out of the ignore or isolated state before it returns to normal operations.                                                                              | All levels      |
| <b>Ignore count</b>              | Number of times the database has been in the ignore state: <b>Current</b> and <b>Allowed</b> .                                                                                           | All levels      |
| <b>Restart</b>                   | Graceful restart capability: <b>enabled</b> or <b>disabled</b> .                                                                                                                         | All levels      |
| <b>Restart duration</b>          | Time period for complete reacquisition of OSPF neighbors.                                                                                                                                | All levels      |
| <b>Restart grace period</b>      | Time period for which the neighbors should consider the restarting routing device as part of the topology.                                                                               | All levels      |



Table 230: show ospf overview Output Fields (*continued*)

| Field name                    | Field Description                                                                                                                                                                                                                                                                                                                     | Level of Output  |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Graceful restart helper mode  | (OSPFv2) Standard graceful restart helper capability (based on RFC 3623): <b>enabled</b> or <b>disabled</b> .                                                                                                                                                                                                                         | All levels       |
| Restart-signaling helper mode | (OSPFv2) Restart signaling-based graceful restart helper capability (based on RFC 4811, RFC 4812, and RFC 4813): <b>enabled</b> or <b>disabled</b> .                                                                                                                                                                                  | All levels       |
| Helper mode                   | (OSPFv3) Graceful restart helper capability: <b>enabled</b> or <b>disabled</b> .                                                                                                                                                                                                                                                      | All levels       |
| Trace options                 | OSPF-specific trace options.                                                                                                                                                                                                                                                                                                          | <b>extensive</b> |
| Trace file                    | Name of the file to receive the output of the tracing operation.                                                                                                                                                                                                                                                                      | <b>extensive</b> |
| Area                          | Area number. Area 0.0.0.0 is the backbone area.                                                                                                                                                                                                                                                                                       | All levels       |
| Stub type                     | Stub type of area: <b>Normal Stub</b> , <b>Not Stub</b> , or <b>Not so Stubby Stub</b> .                                                                                                                                                                                                                                              | All levels       |
| Authentication Type           | Type of authentication: <b>None</b> , <b>Password</b> , or <b>MD5</b> .<br><br><b>NOTE:</b> The <b>Authentication Type</b> field refers to the authentication configured at the <b>[edit protocols ospf area area-id]</b> level. Any authentication configured for an interface in this area will not affect the value of this field. | All levels       |
| Area border routers           | Number of area border routers.                                                                                                                                                                                                                                                                                                        | All levels       |
| Neighbors                     | Number of autonomous system boundary routers.                                                                                                                                                                                                                                                                                         | All levels       |



## Sample Output

### show ospf overview

```
user@host> show ospf overview
Instance: master
  Router ID: 10.255.245.6
  Route table index: 0
  Configured overload, expires in 118 seconds
  LSA refresh time: 50 minutes
  Restart: Enabled
    Restart duration: 20 sec
    Restart grace period: 40 sec
    Helper mode: enabled
  Area: 0.0.0.0
    Stub type: Not Stub
    Authentication Type: None
    Area border routers: 0, AS boundary routers: 0
  Neighbors
    Up (in full state): 0
  Topology: default (ID 0)
  Prefix export count: 0
  Full SPF runs: 1
  SPF delay: 0.200000 sec, SPF holddown: 5 sec, SPF rapid runs: 3
```

### show ospf overview (With Database Protection)

```
user@host> show ospf overview
Instance: master
  Router ID: 10.255.112.218
  Route table index: 0
  LSA refresh time: 50 minutes
  Traffic engineering
  Restart: Enabled
    Restart duration: 180 sec
    Restart grace period: 210 sec
    Graceful restart helper mode: Enabled
    Restart-signaling helper mode: Enabled
  Database protection state: Normal
    Warning threshold: 70 percent
    Non self-generated LSAs: Current 582, Warning 700, Allowed 1000
    Ignore time: 30, Reset time: 60
    Ignore count: Current 0, Allowed 1
  Area: 0.0.0.0
    Stub type: Not Stub
    Authentication Type: None
    Area border routers: 0, AS boundary routers: 0
  Neighbors
    Up (in full state): 160
  Topology: default (ID 0)
  Prefix export count: 0
  Full SPF runs: 70
  SPF delay: 0.200000 sec, SPF holddown: 5 sec, SPF rapid runs: 3
  Backup SPF: Not Needed
```

### show ospf3 overview (With Database Protection)

```
user@host> show ospf3 overview
Instance: master
  Router ID: 10.255.112.128
  Route table index: 0
  LSA refresh time: 50 minutes
  Database protection state: Normal
```



```

Warning threshold: 80 percent
Non self-generated LSAs: Current 3, Warning 8, Allowed 10
Ignore time: 30, Reset time: 60
Ignore count: Current 0, Allowed 2
Area: 0.0.0.0
Stub type: Not Stub
Area border routers: 0, AS boundary routers: 0
Neighbors
  Up (in full state): 1
Topology: default (ID 0)
Prefix export count: 0
Full SPF runs: 7
SPF delay: 0.200000 sec, SPF holddown: 5 sec, SPF rapid runs: 3
Backup SPF: Not Needed

```

#### show ospf overview extensive

```

user@host> show ospf overview extensive
Instance: master
Router ID: 1.1.1.103
Route table index: 0
Full SPF runs: 13, SPF delay: 0.200000 sec
LSA refresh time: 50 minutes
Restart: Disabled
Trace options: lsa
Trace file: /var/log/ospf size 131072 files 10
Area: 0.0.0.0
Stub type: Not Stub
Authentication Type: None
Area border routers: 0, AS boundary routers: 0
Neighbors
  Up (in full state): 1

```



## show (ospf | ospf3) route

---

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                   | <pre>show (ospf   ospf3) route &lt;brief   detail   extensive&gt; &lt;abr   asbr   extern   inter   intra&gt; &lt;destination&gt; &lt;instance (default   ipv4-multicast   <i>instance-name</i>)&gt; &lt;logical-system (default   ipv4-multicast   <i>logical-system-name</i>)&gt; &lt;network&gt; &lt;no-backup-coverage&gt; &lt;realm (ipv4-multicast   ipv4-unicast   ipv6-multicast)&gt; &lt;router&gt; &lt;topology (default   ipv4-multicast   <i>topology-name</i>)&gt; &lt;transit&gt;</pre>                                                                                                                                                                                  |
| <b>Syntax (EX Series Switch and QFX Series)</b> | <pre>show (ospf   ospf3) route &lt;brief   detail   extensive&gt; &lt;abr   asbr   extern   inter   intra&gt; &lt;destination&gt; &lt;instance <i>instance-name</i> &lt;network&gt; &lt;no-backup-coverage&gt; &lt;router&gt; &lt;topology (default   ipv4-multicast   <i>topology-name</i>)&gt; &lt;transit&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>                      | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>topology</b> option introduced in Junos OS Release 9.0.</p> <p><b>realm</b> option introduced in Junos OS Release 9.2.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>                              | Display the entries in the Open Shortest Path First (OSPF) routing table.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                                  | <p><b>none</b>—Display standard information about all entries in the OSPF routing table for all routing instances and all topologies.</p> <p><b>destination</b>—Display routes to the specified IP address (with optional destination prefix length).</p> <p><b>brief   detail   extensive</b>—(Optional) Display the specified level of output.</p> <p><b>abr</b>—(Optional) Display routes to area border routers.</p> <p><b>asbr</b>—(Optional) Display routes to autonomous system border routers.</p> <p><b>extern</b>—(Optional) Display external routes.</p> <p><b>inter</b>—(Optional) Display interarea routes.</p> <p><b>intra</b>—(Optional) Display intra-area routes.</p> |



**instance** (**default** | **ipv4-multicast** | *instance-name*)—(Optional) Display entries for the default routing instance, the IPv4 multicast routing instance, or for the specified routing instance.

**logical-system** (**default** | **ipv4-multicast** | *logical-system-name*)—(Optional) Perform this operation on the default logical system, the IPv4 multicast logical system, or on a particular logical system.

**network**—(Optional) Display routes to networks.

**no-backup-coverage**—(Optional) Display routes with no backup coverage.

**realm** (**ipv4-multicast** | **ipv4-unicast** | **ipv6-multicast**)—(OSPFv3 only) (Optional) Display entries in the routing table for the specified OSPFv3 realm, or address family. Use the **realm** option to specify an address family for OSPFv3 other than IPv6 unicast, which is the default.

**router**—(Optional) Display routes to all routers.

**topology** (**default** | **ipv4-multicast** | *topology-name*)—(OSPFv2 only) (Optional) Display routes for the default OSPF topology, IPv4 multicast topology, or for a particular topology.

**transit**—(Optional) (OSPFv3 only) Display OSPFv3 routes to pseudonodes.

**Required Privilege Level** view

**List of Sample Output** [show ospf route on page 3536](#)  
[show ospf route detail on page 3536](#)  
[show ospf3 route on page 3536](#)  
[show ospf3 route detail on page 3536](#)  
[show ospf route topology voice on page 3537](#)

**Output Fields** [Table 231 on page 3533](#) list the output fields for the **show (ospf | ospf3) route** command. Output fields are listed in the approximate order in which they appear.

**Table 231: show (ospf | ospf3) route Output Fields**

| Field Name       | Field Description                                                                                                                                                                                                                      | Output Level |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| <b>Topology</b>  | Name of the topology.                                                                                                                                                                                                                  | All levels   |
| <b>Prefix</b>    | Destination of the route.                                                                                                                                                                                                              | All levels   |
| <b>Path type</b> | How the route was learned: <ul style="list-style-type: none"> <li><b>Inter</b>—Interarea route</li> <li><b>Ext1</b>—External type 1 route</li> <li><b>Ext2</b>—External type 2 route</li> <li><b>Intra</b>—Intra-area route</li> </ul> | All levels   |



Table 231: show (ospf | ospf3) route Output Fields (*continued*)

| Field Name                 | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Output Level  |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| <b>Route type</b>          | The type of routing device from which the route was learned: <ul style="list-style-type: none"> <li>• <b>AS BR</b>—Route to AS border router.</li> <li>• <b>Area BR</b>—Route to area border router.</li> <li>• <b>Area/AS BR</b>—Route to router that is both an <b>Area BR</b> and <b>AS BR</b>.</li> <li>• <b>Network</b>—Network router.</li> <li>• <b>Router</b>—Route to a router that is neither an <b>Area BR</b> nor an <b>AS BR</b>.</li> <li>• <b>Transit</b>—(OSPFv3 only) Route to a pseudonode representing a transit network, LAN, or nonbroadcast multiaccess (NBMA) link.</li> <li>• <b>Discard</b>—Route to a summary discard.</li> </ul> | All levels    |
| <b>NH Type</b>             | Next-hop type: <b>LSP</b> or <b>IP</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | All levels    |
| <b>Metric</b>              | Route's metric value.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | All levels    |
| <b>NH-interface</b>        | (OSPFv3 only) Interface through which the route's next hop is reachable.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | All levels    |
| <b>NH-addr</b>             | (OSPFv3 only) IPv6 address of the next hop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | All levels    |
| <b>NextHop Interface</b>   | (OSPFv2 only) Interface through which the route's next hop is reachable.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | All levels    |
| <b>Nexthop addr/label</b>  | (OSPFv2 only) If the <b>NH Type</b> is <b>IP</b> , then it is the address of the next hop. If the <b>NH Type</b> is <b>LSP</b> , then it is the name of the label-switched path.                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | All levels    |
| <b>Area</b>                | Area ID of the route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>detail</b> |
| <b>Origin</b>              | Router from which the route was learned.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>detail</b> |
| <b>Type 7</b>              | Route was learned through a not-so-stubby area (NSSA) link-state advertisement (LSA).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>detail</b> |
| <b>P-bit</b>               | Route was learned through NSSA LSA and the propagate bit was set.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>detail</b> |
| <b>Fwd NZ</b>              | Forwarding address is nonzero. <b>Fwd NZ</b> is only displayed if the route is learned through an NSSA LSA.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>detail</b> |
| <b>optional-capability</b> | Optional capabilities propagated in the router LSA. This field is in the output for intra-area router routes only (when <b>Route Type</b> is <b>Area BR</b> , <b>AS BR</b> , <b>Area/AS BR</b> , or <b>Router</b> ), not for interarea router routes or network routes. Three bits in this field are defined as follows: <ul style="list-style-type: none"> <li>• <b>0x4 (V)</b>—Routing device is at the end of a virtual active link.</li> <li>• <b>0x2 (E)</b>—Routing device is an autonomous system boundary router.</li> <li>• <b>0x1 (B)</b>—Routing device is an area border router.</li> </ul>                                                     | <b>detail</b> |



Table 231: show (ospf | ospf3) route Output Fields (*continued*)

| Field Name      | Field Description                                                                                                                                                                                                                            | Output Level  |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| <b>priority</b> | The priority assigned to the prefix: <ul style="list-style-type: none"><li>• <b>high</b></li><li>• <b>medium</b></li><li>• <b>low</b></li></ul> <p><b>NOTE:</b> The <b>priority</b> field applies only to routes of type <b>Network</b>.</p> | <b>detail</b> |



## Sample Output

### show ospf route

```
user@host> show ospf route
Prefix                Path   Route   NH   Metric  NextHop      Nexthop
                   Type   Type    Type
10.255.71.12          Intra Router   IP    1     fe-0/0/2.0   192.16.22.86
10.255.71.13/32       Intra Network IP    0     lo0.0
192.168.222.84/30     Intra Network LSP   1     fe-0/0/2.0   lsp-ab
```

### show ospf route detail

```
user@host> show ospf route detail
Topology default Route Table:

Prefix                Path   Route   NH   Metric  NextHop      Nexthop
                   Type   Type    Type
10.255.14.174          Inter AS BR   IP    210   t1-3/0/1.0
    area 0.0.0.2, origin 10.255.14.185
10.255.14.178          Intra Router   IP    200   t3-3/1/3.0
    area 0.0.0.2, origin 10.255.14.178, optional-capability 0x0
10.210.1.0/30          Intra Network IP    10    t3-3/1/2.0
    area 0.0.0.2, origin 10.255.14.172, priority medium
100.1.1.1/32           Inter Network IP    210   t1-3/0/1.0
    area 0.0.0.2, origin 10.255.14.185, priority low
112.3.1.0/24           Ext2  Network   IP    0     t1-3/0/1.0
    area 0.0.0.0, origin 10.255.14.174, priority high
200.3.3.0/30           Inter Network IP    220   t1-3/0/1.0
    area 0.0.0.2, origin 10.255.14.185, priority high
```

### show ospf3 route

```
user@host> show ospf3 route
Prefix                Path   Route   NH   Metric  NextHop      Nexthop
                   Type   Type    Type
10.255.71.13          Intra Router   IP    1
    NH-interface fe-0/0/2.0, NH-addr fe80::290:69ff:fe9b:e002
10.255.71.13;0.0.0.2
10.255.245.1           Intra Router   IP    40   fxp1.1      192.168.36.17
    area 0.0.0.0, origin 10.255.245.1 optional-capability 0x0,
10.255.245.3           Intra AS BR   IP    1    fxp2.3      192.168.36.34
    area 0.0.0.0, origin 10.255.245.3 optional-capability 0x0,
10.255.245.1/32        Intra Network IP    40   fxp1.1      192.168.36.17
    area 0.0.0.0, origin 10.255.245.1, priority high
10.255.245.2/32        Intra Network IP    0    lo0.0
    area 0.0.0.0, origin 10.255.245.2, priority medium
10.255.245.3/32        Intra Network IP    1    fxp2.3      192.168.36.34
    area 0.0.0.0, origin 10.255.245.3, priority low
    Intra Transit     IP    1
    NH-interface fe-0/0/2.0
192::168:222:84/126    Intra Network IP    1
    NH-interface fe-0/0/2.0
abcd::71:12/128        Intra Network IP    0
    NH-interface lo0.0
abcd::71:13/128        Intra Network LSP    1
    NH-interface fe-0/0/2.0, NH-addr lsp-cd
```



### show ospf3 route detail

```

user@host> show ospf3 route detail
Prefix                                Path    Route    NH    Metric
                                     type    type    type
10.255.14.174                         Intra   Area/AS BR IP    110
    NH-interface so-1/2/2.0
    Area 0.0.0.0, Origin 10.255.14.174, Optional-capability 0x3
10.255.14.178                         Intra   Router   IP    200
    NH-interface t3-3/1/3.0
    Area 0.0.0.0, Origin 10.255.14.178, Optional-capability 0x0
10.255.14.185;0.0.0.2                 Intra   Transit  IP    200
    NH-interface t1-3/0/1.0
    NH-interface so-1/2/2.0
    Area 0.0.0.0, Origin 10.255.14.185
1000:1:1::1/128                      Inter   Network  IP    110
    NH-interface so-1/2/2.0
    Area 0.0.0.0, Origin 10.255.14.174, Priority low
1001:2:1::/48                        Ext1    Network  IP    110
    NH-interface so-1/2/2.0
    Area 0.0.0.0, Origin 10.255.14.174, Fwd NZ, Priority medium
1002:1:7::/48                        Ext2    Network  IP    0
    NH-interface so-1/2/2.0
    Area 0.0.0.0, Origin 10.255.14.174, Fwd NZ, Priority low
1002:3:4::/48                        Ext2    Network  IP    0
    NH-interface so-1/2/2.0
    Area 0.0.0.0, Origin 10.255.14.174, Fwd NZ, Priority high
abcd::10:255:14:172/128              Intra   Network  IP    0
    NH-interface lo0.0
    Area 0.0.0.0, Origin 10.255.14.172, Priority low

```

### show ospf route topology voice

```

user@host show ospf route topology voice
Topology voice Route Table:
Prefix          Path    Route    NH    Metric  NextHop    Nexthop
                Type    Type     Type
10.255.8.2      Intra   Router   IP    1        so-0/2/0.0
10.255.8.3      Intra   Router   IP    2        so-0/2/0.0
10.255.8.1/32   Intra   Network  IP    0        lo0.0
10.255.8.2/32   Intra   Network  IP    1        so-0/2/0.0
10.255.8.3/32   Intra   Network  IP    2        so-0/2/0.0
192.168.8.0/29  Intra   Network  IP    2        so-0/2/0.0
192.168.8.44/30 Intra   Network  IP    2        so-0/2/0.0
192.168.8.46/32 Intra   Network  IP    1        so-0/2/0.0
192.168.8.48/30 Intra   Network  IP    1        so-0/2/1.0
192.168.8.52/30 Intra   Network  IP    2        so-0/2/0.0
192.168.9.44/30 Intra   Network  IP    1        so-0/2/0.0
192.168.9.45/32 Intra   Network  IP    2        so-0/2/0.0

```



## show (ospf | ospf3) statistics

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                   | show (ospf   ospf3) statistics<br><instance <i>instance-name</i> ><br><logical-system (all   <i>logical-system-name</i> )><br><realm (ipv4-multicast   ipv4-unicast   ipv6-multicast)>                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Syntax (EX Series Switch and QFX Series)</b> | show (ospf   ospf3) statistics<br><instance <i>instance-name</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>                      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>realm</b> option introduced in Junos OS Release 9.2.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>                              | Display OSPF statistics.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                                  | <p><b>none</b>—Display OSPF statistics for all routing instances.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display all statistics for the specified routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>realm (ipv4-multicast   ipv4-unicast   ipv6-multicast)</b>—(Optional) (OSPFv3 only) Display all statistics for the specified OSPFv3 realm, or address family. Use the <b>realm</b> option to specify an address family for OSPFv3 other than IPv6 unicast, which is the default.</p> |
| <b>Required Privilege Level</b>                 | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>                    | <ul style="list-style-type: none"> <li><a href="#">clear (ospf   ospf3) statistics on page 3489</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>List of Sample Output</b>                    | <a href="#">show ospf statistics on page 3540</a><br><a href="#">show ospf statistics logical-system all on page 3540</a><br><a href="#">show ospf3 statistics on page 3541</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Output Fields</b>                            | Table 232 on page 3538 lists the output fields for the <b>show (ospf   ospf3) statistics</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

**Table 232: show (ospf | ospf3) statistics Output Fields**

| Field Name                                  | Field Description                                                |
|---------------------------------------------|------------------------------------------------------------------|
| Packet type                                 | Type of OSPF packet.                                             |
| Total Sent/Total Received                   | Total number of packets sent and received.                       |
| Last 5 seconds Sent/Last 5 seconds Received | Total number of packets sent and received in the last 5 seconds. |



Table 232: show (ospf | ospf3) statistics Output Fields (*continued*)

| Field Name                     | Field Description                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DBDs retransmitted</b>      | Total number of database description packets retransmitted, and number retransmitted in the last 5 seconds.                                                                                                                                                                                                                                                                                                               |
| <b>LSAs flooded</b>            | Total number of link-state advertisements flooded, and number flooded in the last 5 seconds.                                                                                                                                                                                                                                                                                                                              |
| <b>LSAs flooded high-prio</b>  | <p>Total number of high priority link-state advertisements flooded, and number flooded in the last 5 seconds.</p> <p>A link-state advertisement is deemed a high priority if it has changed since it was last sent.</p>                                                                                                                                                                                                   |
| <b>LSAs retransmitted</b>      | Total number of link-state advertisements retransmitted, and number retransmitted in the last 5 seconds.                                                                                                                                                                                                                                                                                                                  |
| <b>LSAs transmitted to nbr</b> | Total number of link-state advertisements transmitted to a neighbor, and number transmitted in the last 5 seconds.                                                                                                                                                                                                                                                                                                        |
| <b>LSAs requested</b>          | Total number of link-state advertisements requested by neighboring devices, and number requested in the last 5 seconds.                                                                                                                                                                                                                                                                                                   |
| <b>LSAs acknowledged</b>       | Total number of link-state advertisements acknowledged, and number acknowledged in the last 5 seconds.                                                                                                                                                                                                                                                                                                                    |
| <b>Flood queue depth</b>       | Total number of entries in the extended queue.                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Total rexmit entries</b>    | Total number of retransmission entries waiting to be sent from the OSPF routing instance.                                                                                                                                                                                                                                                                                                                                 |
| <b>db summaries</b>            | Total number of database description summaries waiting to be sent from the OSPF routing instance.                                                                                                                                                                                                                                                                                                                         |
| <b>lsreq entries</b>           | Total number of link-state request entries waiting to be sent from the OSPF routing instance.                                                                                                                                                                                                                                                                                                                             |
| <b>Receive errors</b>          | <p>Number and type of receive errors. Some sample receive errors include:</p> <ul style="list-style-type: none"> <li>• <b>mtu mismatches</b></li> <li>• <b>no interface found</b></li> <li>• <b>no virtual link found</b></li> <li>• <b>nssa mismatches</b></li> <li>• <b>stub area mismatches</b></li> <li>• <b>subnet mismatches</b></li> </ul> <p>If there are no receive errors, the output displays <b>none</b>.</p> |



## Sample Output

### show ospf statistics

```

user@host> show ospf statistics
Packet type          Total
                   Sent      Received
Hello                31        14
DbD                   9         10
LSReq                 2          2
LSUpdate             8         16
LSAck                 9          9

                   Last 5 seconds
                   Sent      Received
Hello                2          2
DbD                   0          0
LSReq                 0          0
LSUpdate             0          0
LSAck                 0          0

DBDs retransmitted   :          3, last 5 seconds :          0
LSAs flooded         :          12, last 5 seconds :          0
LSAs flooded high-prio :          0, last 5 seconds :          0
LSAs retransmitted   :          0, last 5 seconds :          0
LSAs transmitted to nbr:          3, last 5 seconds :          0
LSAs requested       :          5, last 5 seconds :          0
LSAs acknowledged    :          19, last 5 seconds :          0

Flood queue depth    :          0
Total rexmit entries :          0
db summaries         :          0
lsreq entries        :          0

Receive errors:
  862 no interface found
 115923 no virtual link found

```

### show ospf statistics logical-system all

```

user@host> show ospf statistics logical-system all
Logical-system: C
OSPF instance is not running
-----

Logical-system: B

Packet type          Total
                   Sent      Received
Hello                313740    313653
DbD                   3          2
LSReq                 1          1
LSUpdate             2752     1825
LSAck                 1821     2747

                   Last 5 seconds
                   Sent      Received
Hello                1          0
DbD                   0          0
LSReq                 0          0
LSUpdate             0          0
LSAck                 0          0

DBDs retransmitted   :          0, last 5 seconds :          0
LSAs flooded         :          2741, last 5 seconds :          0
LSAs flooded high-prio :          10, last 5 seconds :          0
LSAs retransmitted   :          0, last 5 seconds :          0
LSAs transmitted to nbr:          2, last 5 seconds :          0
LSAs requested       :          1, last 5 seconds :          0
LSAs acknowledged    :          1831, last 5 seconds :          0

Flood queue depth    :          0
Total rexmit entries :          0
db summaries         :          0
lsreq entries        :          0

Receive errors:
  None
-----

```



logical-system: A

| Packet type | Total  |          | Last 5 seconds |          |
|-------------|--------|----------|----------------|----------|
|             | Sent   | Received | Sent           | Received |
| Hello       | 313698 | 313695   | 0              | 0        |
| DbD         | 2      | 3        | 0              | 0        |
| LSReq       | 1      | 1        | 0              | 0        |
| LSUpdate    | 1825   | 2752     | 0              | 0        |
| LSAck       | 2747   | 1821     | 0              | 0        |

|                          |   |                      |   |   |
|--------------------------|---|----------------------|---|---|
| DBDs retransmitted       | : | 0, last 5 seconds    | : | 0 |
| LSAs flooded             | : | 1825, last 5 seconds | : | 0 |
| LSAs flooded high-prio   | : | 10, last 5 seconds   | : | 0 |
| LSAs retransmitted       | : | 0, last 5 seconds    | : | 0 |
| LSAs transmitted to nbr: | : | 1, last 5 seconds    | : | 0 |
| LSAs requested           | : | 2, last 5 seconds    | : | 0 |
| LSAs acknowledged        | : | 2748, last 5 seconds | : | 0 |

|                      |   |   |
|----------------------|---|---|
| Flood queue depth    | : | 0 |
| Total rexmit entries | : | 0 |
| db summaries         | : | 0 |
| lsreq entries        | : | 0 |

Receive errors:

None

-----

### show ospf3 statistics

```
user@host> show ospf3 statistics
```

| Packet type | Total |          | Last 5 seconds |          |
|-------------|-------|----------|----------------|----------|
|             | Sent  | Received | Sent           | Received |
| Hello       | 0     | 0        | 0              | 0        |
| DbD         | 0     | 0        | 0              | 0        |
| LSReq       | 0     | 0        | 0              | 0        |
| LSUpdate    | 0     | 0        | 0              | 0        |
| LSAck       | 0     | 0        | 0              | 0        |

|                          |   |                   |   |   |
|--------------------------|---|-------------------|---|---|
| DBDs retransmitted       | : | 0, last 5 seconds | : | 0 |
| LSAs flooded             | : | 0, last 5 seconds | : | 0 |
| LSAs flooded high-prio   | : | 0, last 5 seconds | : | 0 |
| LSAs retransmitted       | : | 0, last 5 seconds | : | 0 |
| LSAs transmitted to nbr: | : | 0, last 5 seconds | : | 0 |
| LSAs requested           | : | 0, last 5 seconds | : | 0 |
| LSAs acknowledged        | : | 0, last 5 seconds | : | 0 |

|                      |   |   |
|----------------------|---|---|
| Flood queue depth    | : | 0 |
| Total rexmit entries | : | 0 |
| db summaries         | : | 0 |
| lsreq entries        | : | 0 |

Receive errors:

None







## PART 13

# Routing Information Protocol

- [Overview on page 3545](#)
- [Configuration on page 3551](#)
- [Administration on page 3639](#)







## CHAPTER 40

# Overview

- [RIP Overview on page 3545](#)

## RIP Overview

---

- [RIP Overview on page 3545](#)

## RIP Overview

RIP is an interior gateway protocol (IGP) that uses a distance-vector algorithm to determine the best route to a destination, using the hop count as the metric.

In a RIP network, each router's forwarding table is distributed among the nodes through the flooding of routing table information. Because topology changes are flooded throughout the network, every node maintains the same list of destinations. Packets are then routed to these destinations based on path-cost calculations done at each node in the network.



NOTE: In general, the term *RIP* refers to RIP version 1 and RIP version 2.

This topic contains the following sections:


- [Distance-Vector Routing Protocols on page 3545](#)
- [RIP Protocol Overview on page 3546](#)
- [RIP Packets on page 3547](#)
- [Maximizing Hop Count on page 3548](#)
- [Split Horizon and Poison Reverse Efficiency Techniques on page 3548](#)
- [Limitations of Unidirectional Connectivity on page 3549](#)

## Distance-Vector Routing Protocols

---

Distance-vector routing protocols transmit routing information that includes a distance vector, typically expressed as the number of hops to the destination. This information is flooded out all protocol-enabled interfaces at regular intervals (every 30 seconds in the case of RIP) to create a network map that is stored in each node's local topology database. [Figure 106 on page 3546](#) shows how distance-vector routing works.

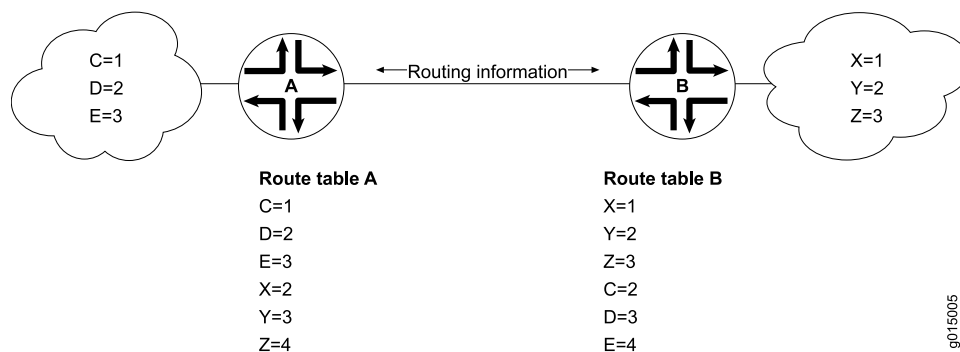

**Figure 106: Distance-Vector Protocol**

In [Figure 106 on page 3546](#), Routers A and B have RIP enabled on adjacent interfaces. Router A has known RIP neighbors Routers C, D, and E, which are 1, 2, and 3 hops away, respectively. Router B has known RIP neighbors Routers X, Y, and Z, which are 1, 2, and 3 hops away, respectively. Every 30 seconds, each router floods its entire routing table information out all RIP-enabled interfaces. In this case, flooding exchanges routing table information across the RIP link.

When Router A receives routing information from Router B, it adds 1 to the hop count to determine the new hop count. For example, Router X has a hop count of 1, but when Router A imports the route to X, the new hop count is 2. The imported route also includes information about where the route was learned, so that the original route is imported as a route to Router X through Router B with a hop count of 2.

When multiple routes to the same host are received, RIP uses the distance-vector algorithm to determine which path to import into the forwarding table. The route with the smallest hop count is imported. If there are multiple routes with the same hop count, all are imported into the forwarding table, and traffic is sent along the paths in round-robin fashion.

### RIP Protocol Overview

The RIP IGP uses the Bellman-Ford, or *distance-vector*, algorithm to determine the best route to a destination. RIP uses the hop count as the metric. RIP enables hosts and routers to exchange information for computing routes through an IP-based network. RIP is intended to be used as an IGP in reasonably homogeneous networks of moderate size.

The Junos® operating system (Junos OS) supports RIP versions 1 and 2.



**NOTE:** RIP is not supported for multipoint interfaces.

RIP version 1 packets contain the minimal information necessary to route packets through a network. However, this version of RIP does not support authentication or subnetting.

RIP uses User Datagram Protocol (UDP) port 520.

RIP has the following architectural limitations:



- The longest network path cannot exceed 15 hops (assuming that each network, or hop, has a cost of 1).
- RIP depends on counting to infinity to resolve certain unusual situations—When the network consists of several hundred routers, and when a routing loop has formed, the amount of time and network bandwidth required to resolve a next hop might be great.
- RIP uses only a fixed metric to select a route. Other IGPs use additional parameters, such as measured delay, reliability, and load.

### RIP Packets

RIP packets contain the following fields:

- Command—Indicates whether the packet is a request or response message. Request messages seek information for the router's routing table. Response messages are sent periodically and also when a request message is received. Periodic response messages are called *update messages*. Update messages contain the command and version fields and 25 destinations (by default), each of which includes the destination IP address and the metric to reach that destination.



**NOTE:** Beginning with Junos OS Release 11.1, three additional command field types are available to support RIP demand circuits. When you configure an interface for RIP demand circuits, the command field indicates whether the packet is an update request, update response, or update acknowledge message. Neighbor interfaces send updates on demand, not periodically. These command field types are only valid on interfaces configured for RIP demand circuits. For more detailed information, see [RIP Demand Circuits Overview](#).

- Version number—Version of RIP that the originating router is running.
- Address family identifier—Address family used by the originating router. The family is always IP.
- Address—IP address included in the packet.
- Metric—Value of the metric advertised for the address.
- Mask—Mask associated with the IP address (RIP version 2 only).
- Next hop—IP address of the next-hop router (RIP version 2 only).

Routing information is exchanged in a RIP network by RIP request and RIP response packets. A router that has just booted can broadcast a RIP request on all RIP-enabled interfaces. Any routers running RIP on those links receive the request and respond by sending a RIP response packet immediately to the router. The response packet contains the routing table information required to build the local copy of the network topology map.



In the absence of RIP request packets, all RIP routers broadcast a RIP response packet every 30 seconds on all RIP-enabled interfaces. The RIP broadcast is the primary way in which topology information is flooded throughout the network.

Once a router learns about a particular destination through RIP, it starts a timer. Every time it receives a new response packet with information about the destination, the router resets the timer to zero. However, if the router receives no updates about a particular destination for 180 seconds, it removes the destination from its RIP routing table.

In addition to the regular transmission of RIP packets every 30 seconds, if a router detects a new neighbor or detects that an interface is unavailable, it generates a triggered update. The new routing information is immediately broadcast out all RIP-enabled interfaces, and the change is reflected in all subsequent RIP response packets.

### Maximizing Hop Count

The successful routing of traffic across a RIP network requires that every node in the network maintain the same view of the topology. Topology information is broadcast between RIP neighbors every 30 seconds. If Router A is many hops away from a new host, Router B, the route to B might take significant time to propagate through the network and be imported into Router A's routing table. If the two routers are 5 hops away from each other, Router A cannot import the route to Router B until 2.5 minutes after Router B is online (30 seconds per hop). For large numbers of hops, the delay becomes prohibitive. To help prevent this delay from growing arbitrarily large, RIP enforces a maximum hop count of 15 hops. Any prefix that is more than 15 hops away is treated as unreachable and assigned a hop count equal to infinity. This maximum hop count is called the *network diameter*.


### Split Horizon and Poison Reverse Efficiency Techniques

Because RIP functions by periodically flooding the entire routing table out to the network, it generates a lot of traffic. The split horizon and poison reverse techniques can help reduce the amount of network traffic originated by RIP hosts and make the transmission of routing information more efficient.

If a router receives a set of route advertisements on a particular interface, RIP determines that those advertisements do not need to be retransmitted out the same interface. This technique, known as *split horizon*, helps limit the amount of RIP routing traffic by eliminating information that other neighbors on that interface have already learned.

[Figure 107 on page 3548](#) shows an example of the split horizon technique.

**Figure 107: Split Horizon Example**

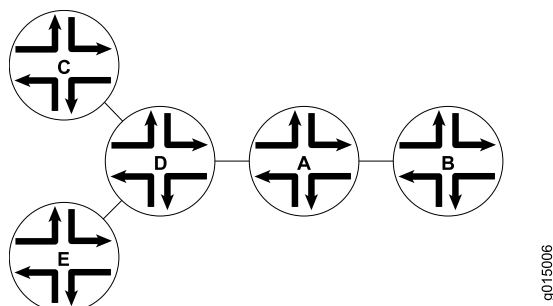




In [Figure 107 on page 3548](#), Router A advertises routes to Routers C, D, and E to Router B. In this example, Router A can reach Router C in 2 hops. When Router A advertises the route to Router B, Router B imports it as a route to Router C through Router A in 3 hops. If Router B then readvertised this route to Router A, Router A would import it as a route to Router C through Router B in 4 hops. However, the advertisement from Router B to Router A is unnecessary, because Router A can already reach the route in 2 hops. The split horizon technique helps reduce extra traffic by eliminating this type of route advertisement.

Similarly, the poison reverse technique helps to optimize the transmission of routing information and improve the time to reach network convergence. If Router A learns about unreachable routes through one of its interfaces, it advertises those routes as unreachable (hop count of 16) out the same interface. [Figure 108 on page 3549](#) shows an example of the poison reverse technique.

**Figure 108: Poison Reverse Example**

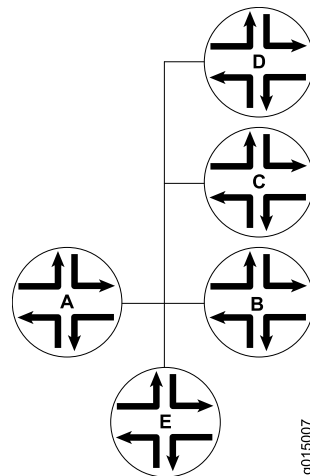


In [Figure 108 on page 3549](#), Router A learns through one of its interfaces that routes to Routers C, D, and E are unreachable. Router A readvertises those routes out the same interface as unreachable. The advertisement informs Router B that Routers C, D, and E are definitely not reachable through Router A.

### Limitations of Unidirectional Connectivity

Because RIP processes routing information based solely on the receipt of routing table updates, it cannot ensure bidirectional connectivity. As [Figure 109 on page 3550](#) shows, RIP networks are limited by their unidirectional connectivity.

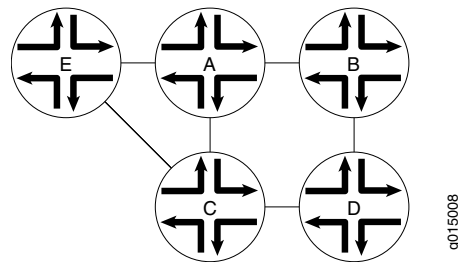

**Figure 109: Limitations of Unidirectional Connectivity**

In [Figure 109 on page 3550](#), Routers A and D flood their routing table information to Router B. Because the path to Router E has the fewest hops when routed through Router A, that route is imported into Router B's forwarding table. However, suppose that Router A can transmit traffic but is not receiving traffic from Router B because of an unavailable link or invalid routing policy. If the only route to Router E is through Router A, any traffic destined for Router A is lost, because bidirectional connectivity was never established.

OSPF establishes bidirectional connectivity with a three-way handshake.

#### Related Documentation

- [Junos OS Feature Support Reference for SRX Series and J Series Devices](#)
- [RIP Configuration Overview](#)
- [Example: Configuring RIP on page 3551](#)



## CHAPTER 41

# Configuration

- [RIP Configuration Tasks on page 3551](#)
- [RIP Configuration Statements on page 3614](#)

### RIP Configuration Tasks

---

- [Example: Configuring RIP on page 3551](#)
- [Example: Configuring Authentication for RIP Routes on page 3558](#)
- [Example: Configuring BFD for RIP on page 3564](#)
- [Example: Configuring BFD Authentication for RIP on page 3570](#)
- [Example: Applying Policies to RIP Routes Imported from Neighbors on page 3578](#)
- [Examples: Controlling Traffic with Metrics in a RIP Network on page 3584](#)
- [Example: Configuring the Sending and Receiving of RIPv1 and RIPv2 Packets on page 3592](#)
- [Example: Redistributing Routes Among RIP Instances on page 3596](#)
- [Example: Configuring RIP Timers on page 3601](#)
- [Example: Tracing RIP Protocol Traffic on page 3608](#)

### Example: Configuring RIP

- [Understanding Basic RIP Routing on page 3551](#)
- [Example: Configuring a Basic RIP Network on page 3552](#)

#### Understanding Basic RIP Routing

---

RIP is an interior gateway protocol (IGP) that routes packets within a single autonomous system (AS). By default, RIP does not advertise the subnets that are directly connected through the device's interfaces. For traffic to pass through a RIP network, you must create a routing policy to export these routes. Advertising only the direct routes propagates the routes to the immediately adjacent RIP-enabled router only. To propagate all routes through the entire RIP network, you must configure the routing policy to export the routes learned through RIP.



### Example: Configuring a Basic RIP Network

This example shows how to configure a basic RIP network.

- [Requirements on page 3552](#)
- [Overview on page 3552](#)
- [Configuration on page 3552](#)
- [Verification on page 3555](#)

#### Requirements

No special configuration beyond device initialization is required before configuring this example.

#### Overview


In this example, you configure a basic RIP network, create a RIP group called **rip-group**, and add the directly connected interfaces to the RIP group. Then you configure a routing policy to advertise direct routes using policy statement **advertise-routes-through-rip**.

By default, Junos OS does not advertise RIP routes, not even routes that are learned through RIP. To advertise RIP routes, you must configure and apply an export routing policy that advertises RIP-learned and direct routes.

In Junos OS, you do not need to configure the RIP version. RIP version 2 is used by default.

To use RIP on the device, you must configure RIP on all of the RIP interfaces within the network. [Figure 110 on page 3552](#) shows the topology used in this example.

**Figure 110: Sample RIP Network Topology**

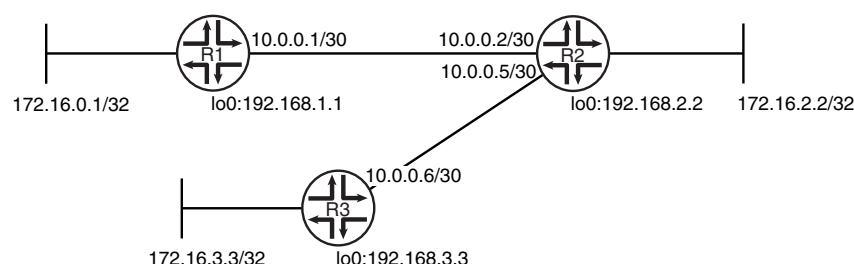

"CLI Quick Configuration" on [page 3552](#) shows the configuration for all of the devices in [Figure 110 on page 3552](#). The section "Step-by-Step Procedure" on [page 3553](#) describes the steps on Device R1.

#### Configuration

##### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

##### Device R1

```
set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.1/30
set interfaces lo0 unit 1 family inet address 172.16.0.1/32
set interfaces lo0 unit 1 family inet address 192.168.1.1/32
```



```

set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.1
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept

```

**Device R2**

```

set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.2/30
set interfaces fe-1/2/1 unit 5 family inet address 10.0.0.5/30
set interfaces lo0 unit 2 family inet address 192.168.2.2/32
set interfaces lo0 unit 2 family inet address 172.16.2.2/32
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.2
set protocols rip group rip-group neighbor fe-1/2/1.5
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept

```

**Device R3**

```

set interfaces fe-1/2/0 unit 6 family inet address 10.0.0.6/30
set interfaces lo0 unit 3 family inet address 192.168.3.3/32
set interfaces lo0 unit 3 family inet address 172.16.3.3/32
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.6
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept

```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure a basic RIP network:

1. Configure the network interfaces.

This example shows multiple loopback interface addresses to simulate attached networks.

```

[edit interfaces]
user@R1# set fe-1/2/0 unit 1 family inet address 10.0.0.1/30

```

```

user@R1# set lo0 unit 1 family inet address 172.16.0.1/32
user@R1# set lo0 unit 1 family inet address 192.168.1.1/32

```

2. Create the RIP group and add the interface.

To configure RIP in Junos OS, you must configure a group that contains the interfaces on which RIP is enabled. You do not need to enable RIP on the loopback interface.

```

[edit protocols rip group rip-group]
user@R1# set neighbor fe-1/2/0.1

```



3. Create the routing policy to advertise both direct and RIP-learned routes.

```
[edit policy-options policy-statement advertise-routes-through-rip term 1]
user@R1# set from protocol direct
user@R1# set from protocol rip
user@R1# set then accept
```

4. Apply the routing policy.

In Junos OS, you can only apply RIP export policies at the group level.

```
[edit protocols rip group rip-group]
user@R1# set export advertise-routes-through-rip
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show policy-options** commands. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 1 {
    family inet {
      address 10.0.0.1/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 172.16.0.1/32;
      address 192.168.1.1/32;
    }
  }
}

user@R1# show protocols
rip {
  group rip-group {
    export advertise-routes-through-rip;
    neighbor fe-1/2/0.1;
  }
}

user@R1# show policy-options
policy-statement advertise-routes-through-rip {
  term 1 {
    from protocol [ direct rip ];
    then accept;
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.



**Verification**

Confirm that the configuration is working properly.

- [Checking the Routing Table on page 3555](#)
- [Looking at the Routes That Device R1 Is Advertising to Device R2 on page 3555](#)
- [Looking at the Routes That Device R1 Is Receiving from Device R2 on page 3556](#)
- [Verifying the RIP-Enabled Interfaces on page 3556](#)
- [Verifying the Exchange of RIP Messages on page 3556](#)
- [Verifying Reachability of All Hosts in the RIP Network on page 3557](#)

**Checking the Routing Table**

**Purpose** Verify that the routing table is populated with the expected routes..

**Action** From operational mode, enter the **show route protocol rip** command.

```
user@R1> show route protocol rip
inet.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.4/30      *[RIP/100] 00:59:15, metric 2, tag 0
                 > to 10.0.0.2 via fe-1/2/0.1
172.16.2.2/32    *[RIP/100] 02:52:48, metric 2, tag 0
                 > to 10.0.0.2 via fe-1/2/0.1
172.16.3.3/32    *[RIP/100] 00:45:05, metric 3, tag 0
                 > to 10.0.0.2 via fe-1/2/0.1
192.168.2.2/32   *[RIP/100] 02:52:48, metric 2, tag 0
                 > to 10.0.0.2 via fe-1/2/0.1
192.168.3.3/32   *[RIP/100] 00:45:05, metric 3, tag 0
                 > to 10.0.0.2 via fe-1/2/0.1
224.0.0.9/32     *[RIP/100] 00:45:09, metric 1
                 MultiRecv
```

**Meaning** The output shows that the routes have been learned from Device R2 and Device R3.

If you were to delete the **from protocol rip** condition in the routing policy on Device R2, the remote routes from Device R3 would not be learned on Device R1.

**Looking at the Routes That Device R1 Is Advertising to Device R2**

**Purpose** Verify that Device R1 is sending the expected routes.

**Action** From operational mode, enter the **show route advertising-protocol rip** command.

```
user@R1> show route advertising-protocol rip 10.0.0.1
inet.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

172.16.0.1/32    *[Direct/0] 05:18:26
                 > via lo0.1
192.168.1.1/32   *[Direct/0] 05:18:25
                 > via lo0.1
```

**Meaning** Device R1 is sending routes to its directly connected networks.



**Looking at the Routes That Device R1 Is Receiving from Device R2**

**Purpose** Verify that Device R1 is receiving the expected routes.

**Action** From operational mode, enter the **show route receive-protocol rip** command.

```
user@R1> show route receive-protocol rip 10.0.0.2
inet.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.4/30          * [RIP/100] 02:31:22, metric 2, tag 0
                    > to 10.0.0.2 via fe-1/2/0.1
172.16.2.2/32       * [RIP/100] 04:24:55, metric 2, tag 0
                    > to 10.0.0.2 via fe-1/2/0.1
172.16.3.3/32       * [RIP/100] 02:17:12, metric 3, tag 0
                    > to 10.0.0.2 via fe-1/2/0.1
192.168.2.2/32      * [RIP/100] 04:24:55, metric 2, tag 0
                    > to 10.0.0.2 via fe-1/2/0.1
192.168.3.3/32      * [RIP/100] 02:17:12, metric 3, tag 0
                    > to 10.0.0.2 via fe-1/2/0.1
```

**Meaning** Device R1 is receiving from Device R2 all of Device R2's directly connected networks. Device R1 is also receiving from Device R2 all of Device R3's directly connected networks, which Device R2 learned from Device R3 through RIP.

**Verifying the RIP-Enabled Interfaces**

**Purpose** Verify that all RIP-enabled Interfaces are available and active.

**Action** From operational mode, enter the **show rip neighbor** command.

```
user@R1> show rip neighbor
```

| Neighbor   | Local<br>State | Source<br>Address | Destination<br>Address | Send<br>Mode | Receive<br>Mode | In<br>Met |
|------------|----------------|-------------------|------------------------|--------------|-----------------|-----------|
| fe-1/2/0.1 | Up             | 10.0.0.1          | 224.0.0.9              | mcast        | both            | 1         |

**Meaning** The output shows that the RIP-enabled interface on Device R1 is operational.

In general for this command, the output shows a list of the RIP neighbors that are configured on the device. Verify the following information:

- Each configured interface is present. Interfaces are listed in alphabetical order.
- Each configured interface is up. The state of the interface is listed in the **Local State** column. A state of **Up** indicates that the link is passing RIP traffic. A state of **Dn** indicates that the link is not passing RIP traffic. In a point-to-point link, this state generally means that either the end point is not configured for RIP or the link is unavailable.

**Verifying the Exchange of RIP Messages**

**Purpose** Verify that RIP messages are being sent and received on all RIP-enabled interfaces.



**Action** From operational mode, enter the **show rip statistics** command.

```
user@R1> show rip statistics
RIPv2 info: port 520; holddown 120s.
      rts learned  rts held down  rqsts dropped  resps dropped
              5              0              0              0

fe-1/2/0.1: 5 routes learned; 2 routes advertised; timeout 180s; update interval
30s
Counter              Total    Last 5 min    Last minute
-----
Updates Sent              2669          10           2
Triggered Updates Sent     2           0           0
Responses Sent             0           0           0
Bad Messages              0           0           0
RIPv1 Updates Received     0           0           0
RIPv1 Bad Route Entries    0           0           0
RIPv1 Updates Ignored      0           0           0
RIPv2 Updates Received    2675         11           2
RIPv2 Bad Route Entries    0           0           0
RIPv2 Updates Ignored      0           0           0
Authentication Failures    0           0           0
RIP Requests Received      0           0           0
RIP Requests Ignored       0           0           0
none                      0           0           0
```

**Meaning** The output shows the number of RIP routes learned. It also shows the number of RIP updates sent and received on the RIP-enabled interfaces. Verify the following information:

- The number of RIP routes learned matches the number of expected routes learned. Subnets learned by direct connectivity through an outgoing interface are not listed as RIP routes.
- RIP updates are being sent on each RIP-enabled interface. If no updates are being sent, the routing policy might not be configured to export routes.
- RIP updates are being received on each RIP-enabled interface. If no updates are being received, the routing policy might not be configured to export routes on the host connected to that subnet. The lack of updates might also indicate an authentication error.

#### *Verifying Reachability of All Hosts in the RIP Network*

**Purpose** Use the **traceroute** command on each loopback address in the network to verify that all hosts in the RIP network are reachable from each Juniper Networks device.

**Action** From operational mode, enter the **traceroute** command.

```
user@R1> traceroute 192.168.3.3
traceroute to 192.168.3.3 (192.168.3.3), 30 hops max, 40 byte packets
 1  10.0.0.2 (10.0.0.2)  1.094 ms  1.028 ms  0.957 ms
 2  192.168.3.3 (192.168.3.3)  1.344 ms  2.245 ms  2.125 ms
```

**Meaning** Each numbered row in the output indicates a routing hop in the path to the host. The three-time increments indicate the round-trip time (RTT) between the device and the hop for each traceroute packet.



To ensure that the RIP network is healthy, verify the following information:

- The final hop in the list is the host you want to reach.
- The number of expected hops to the host matches the number of hops in the traceroute output. The appearance of more hops than expected in the output indicates that a network segment is probably unreachable. It might also indicate that the incoming or outgoing metric on one or more hosts has been set unexpectedly.

**Related  
Documentation**

- [Example: Configuring Point-to-Multipoint RIP Networks](#)

## Example: Configuring Authentication for RIP Routes

- [Understanding RIP Authentication on page 3558](#)
- [Example: Configuring Route Authentication for RIP on page 3558](#)
- [Enabling Authentication with Plain-Text Passwords \(CLI Procedure\) on page 3563](#)
- [Enabling Authentication with MD5 Authentication \(CLI Procedure\) on page 3563](#)

### Understanding RIP Authentication

---

RIPv2 provides authentication support so that RIP links can require authentication keys (passwords) before they become active. Authentication provides an additional layer of security on the network beyond the other security features. By default, this authentication is disabled.

Authentication keys can be specified in either plain-text or MD5 form. Authentication requires all routers within the RIP network or subnetwork to have the same authentication type and key (password) configured.

This type of authentication is not supported on RIPv1 networks.

### Example: Configuring Route Authentication for RIP

---

This example shows how to configure authentication for a RIP network.

- [Requirements on page 3558](#)
- [Overview on page 3558](#)
- [Configuration on page 3559](#)
- [Verification on page 3562](#)

#### **Requirements**

No special configuration beyond device initialization is required before configuring this example.

#### **Overview**

You can configure the router to authenticate RIP route queries. By default, authentication is disabled. You can use one of the following authentication methods:




- Simple authentication—Uses a text password that is included in the transmitted packet. The receiving router uses an authentication key (password) to verify the packet.
- MD5 authentication—Creates an encoded checksum that is included in the transmitted packet. The receiving router uses an authentication key (password) to verify the packet's MD5 checksum.

This example shows MD5 authentication.

Figure 111 on page 3559 shows the topology used in this example.

**Figure 111: RIP Authentication Network Topology**

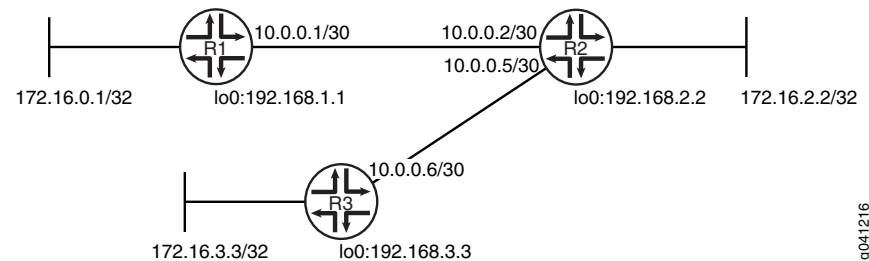

"CLI Quick Configuration" on page 3559 shows the configuration for all of the devices in Figure 111 on page 3559. The section "Step-by-Step Procedure" on page 3560 describes the steps on Device R1.

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```

Device R1
set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.1/30
set interfaces lo0 unit 1 family inet address 172.16.0.1/32
set interfaces lo0 unit 1 family inet address 192.168.1.1/32
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.1
set protocols rip authentication-type md5
set protocols rip authentication-key "$9$ONLRBhreK87dsM8i.5FAtM8XxNb"
set protocols rip traceoptions file rip-authentication-messages
set protocols rip traceoptions flag auth
set protocols rip traceoptions flag packets
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept

Device R2
set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.2/30
set interfaces fe-1/2/1 unit 5 family inet address 10.0.0.5/30
set interfaces lo0 unit 2 family inet address 192.168.2.2/32
set interfaces lo0 unit 2 family inet address 172.16.2.2/32
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.2

```



```
set protocols rip group rip-group neighbor fe-1/2/1.5
set protocols rip authentication-type md5
set protocols rip authentication-key "$9$Lf1Xds2gJDHmoJCu1hKvoJGUjq"
set protocols rip traceoptions file rip-authentication-messages
set protocols rip traceoptions flag auth
set protocols rip traceoptions flag packets
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
```

**Device R3**

```
set interfaces fe-1/2/0 unit 6 family inet address 10.0.0.6/30
set interfaces lo0 unit 3 family inet address 192.168.3.3/32
set interfaces lo0 unit 3 family inet address 172.16.3.3/32
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.6
set protocols rip authentication-type md5
set protocols rip authentication-key "$9$G.UkP5T39tOz3K87V4oz36/Cu"
set protocols rip traceoptions file rip-authentication-messages
set protocols rip traceoptions flag auth
set protocols rip traceoptions flag packets
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure RIP authentication:

1. Configure the network interfaces.

This example shows multiple loopback interface addresses to simulate attached networks.

```
[edit interfaces]
user@R1# set fe-1/2/0 unit 1 family inet address 10.0.0.1/30
```

```
user@R1# set lo0 unit 1 family inet address 172.16.0.1/32
user@R1# set lo0 unit 1 family inet address 192.168.1.1/32
```

2. Create the RIP group and add the interface.

To configure RIP in Junos OS, you must configure a group that contains the interfaces on which RIP is enabled. You do not need to enable RIP on the loopback interface.

```
[edit protocols rip group rip-group]
user@R1# set neighbor fe-1/2/0.1
```

3. Create the routing policy to advertise both direct and RIP-learned routes.

```
[edit policy-options policy-statement advertise-routes-through-rip term 1]
user@R1# set from protocol direct
```



```
user@R1# set from protocol rip
user@R1# set then accept
```

4. Apply the routing policy.

In Junos OS, you can only apply RIP export policies at the group level.

```
[edit protocols rip group rip-group]
user@R1# set export advertise-routes-through-rip
```

5. Require MD5 authentication for RIP route queries received on an interface.

The passwords must match on neighboring RIP routers. If the password does not match, the packet is rejected. The password can be from 1 through 16 contiguous characters long and can include any ASCII strings.

Do not enter the password as shown here. The password shown here is the encrypted password that is displayed in the configuration after the actual password is already configured.

```
[edit protocols rip]
user@R1# set authentication-type md5
user@R1# set authentication-key "$9$ONLRBhreK87dsM8i.5FAtM8XxNb"
```

6. Configure tracing operations to track authentication.

```
[edit protocols rip traceoptions]
user@R1# set file rip-authentication-messages
user@R1# set flag auth
user@R1# set flag packets
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show policy-options** commands. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 1 {
    family inet {
      address 10.0.0.1/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 172.16.0.1/32;
      address 192.168.1.1/32;
    }
  }
}

user@R1# show protocols
rip {
  traceoptions {
    file rip-authentication-messages;
    flag auth;
```



```

        flag packets;
    }
    authentication-type md5;
    authentication-key "$9$ONLRBhreK87dsM8i.5FAtM8XxNb"; ## SECRET-DATA
    group rip-group {
        export advertise-routes-through-rip;
        neighbor fe-1/2/0.1;
    }
}

user@R1# show policy-options
policy-statement advertise-routes-through-rip {
    term 1 {
        from protocol [ direct rip ];
        then accept;
    }
}

```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.

- [Checking for Authentication Failures on page 3562](#)
- [Verifying That MD5 Authentication Is Enabled in RIP Update Packets on page 3563](#)

### Checking for Authentication Failures

**Purpose** Verify that there are no authentication failures.

**Action** From operational mode, enter the **show rip statistics** command.

```

user@R1> show rip statistics
RIPv2 info: port 520; holddown 120s.
      rts learned  rts held down  rqsts dropped  resps dropped
              5              0              0              0

fe-1/2/0.1: 5 routes learned; 2 routes advertised; timeout 180s; update interval
30s
Counter              Total    Last 5 min  Last minute
-----
Updates Sent          2669         10          2
Triggered Updates Sent      2          0          0
Responses Sent          0          0          0
Bad Messages           0          0          0
RIPv1 Updates Received     0          0          0
RIPv1 Bad Route Entries    0          0          0
RIPv1 Updates Ignored      0          0          0
RIPv2 Updates Received    2675         11          2
RIPv2 Bad Route Entries    0          0          0
RIPv2 Updates Ignored      0          0          0
Authentication Failures     0          0          0
RIP Requests Received      0          0          0
RIP Requests Ignored       0          0          0
none                     0          0          0

```

**Meaning** The output shows that there are no authentication failures.



### Verifying That MD5 Authentication Is Enabled in RIP Update Packets

**Purpose** Use tracing operations to verify that MD5 authentication is enabled in RIP updates.

**Action** From operational mode, enter the **show log** command.

```
user@R1> show log rip-authentication-messages | match md5
Feb 15 15:45:13.969462      sending msg 0xb9a8c04, 3 rtes (needs MD5)
Feb 15 15:45:43.229867      sending msg 0xb9a8c04, 3 rtes (needs MD5)
Feb 15 15:46:13.174410      sending msg 0xb9a8c04, 3 rtes (needs MD5)
Feb 15 15:46:42.716566      sending msg 0xb9a8c04, 3 rtes (needs MD5)
Feb 15 15:47:11.425076      sending msg 0xb9a8c04, 3 rtes (needs MD5)
...
```

**Meaning** The **(needs MD5)** output shows that all route updates require MD5 authentication.

### Enabling Authentication with Plain-Text Passwords (CLI Procedure)

To configure authentication that requires a plain-text password to be included in the transmitted packet, enable simple authentication by performing these steps on all RIP devices in the network:

1. Navigate to the top of the configuration hierarchy.
2. Perform the configuration tasks described in [Table 233 on page 3563](#).
3. If you are finished configuring the router, commit the configuration.

**Table 233: Configuring Simple RIP Authentication**

| Task                                                                                                                                                             | CLI Configuration Editor                                                                                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| Navigate to <b>Rip</b> level in the configuration hierarchy.                                                                                                     | From the <b>[edit]</b> hierarchy level, enter<br><br><b>edit protocols rip</b>                             |
| Set the authentication type to <b>simple</b> .                                                                                                                   | Set the authentication type to <b>simple</b> :<br><br><b>set authentication-type simple</b>                |
| Set the authentication key to a simple-text password.<br><br>The password can be from 1 through 16 contiguous characters long and can include any ASCII strings. | Set the authentication key to a simple-text password:<br><br><b>set authentication-key <i>password</i></b> |

### Enabling Authentication with MD5 Authentication (CLI Procedure)

To configure authentication that requires an MD5 password to be included in the transmitted packet, enable MD5 authentication by performing these steps on all RIP devices in the network:

1. Navigate to the top of the configuration hierarchy.
2. Perform the configuration tasks described in [Table 234 on page 3564](#).
3. If you are finished configuring the router, commit the configuration.



Table 234: Configuring MD5 RIP Authentication

| Task                                                                                                                                             | CLI Configuration Editor                                                              |
|--------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Navigate to <b>Rip</b> level in the configuration hierarchy.                                                                                     | From the <b>[edit]</b> hierarchy level, enter<br><br><b>edit protocols rip</b>        |
| Set the authentication type to <b>MD5</b> .                                                                                                      | Set the authentication type to <b>md5</b> :<br><br><b>set authentication-type md5</b> |
| Set the MD5 authentication key (password).<br><br>The key can be from 1 through 16 contiguous characters long and can include any ASCII strings. | Set the MD5 authentication key:<br><br><b>set authentication-key password</b>         |

**Related Documentation**

- [Example: Configuring RIP on page 3551](#)

### Example: Configuring BFD for RIP

- [Understanding BFD for RIP on page 3564](#)
- [Example: Configuring BFD for RIP on page 3565](#)

#### Understanding BFD for RIP

The Bidirectional Forwarding Detection (BFD) Protocol is a simple hello mechanism that detects failures in a network. Hello packets are sent at a specified, regular interval. A neighbor failure is detected when the routing device stops receiving a reply after a specified interval. BFD works with a wide variety of network environments and topologies. BFD failure detection times are shorter than RIP detection times, providing faster reaction times to various kinds of failures in the network. Instead of waiting for the routing protocol neighbor timeout, BFD provides rapid detection of link failures. BFD timers are adaptive and can be adjusted to be more or less aggressive. For example, a timer can adapt to a higher value if the adjacency fails, or a neighbor can negotiate a higher value for a timer than the one configured.

BFD enables quick failover between a primary and a secondary routed path. The protocol tests the operational status of the interface multiple times per second. BFD provides for configuration timers and thresholds for failure detection. For example, if the minimum interval is set for 50 milliseconds and the threshold uses the default value of three missed messages, a failure is detected on an interface within 200 milliseconds of the failure.

Intervening devices (for example, an Ethernet LAN switch) hide link-layer failures from routing protocol peers, such as when two routers are connected by way of a LAN switch, where the local interface status remains up even when a physical fault happens on the remote link. Link-layer failure detection times vary, depending on the physical media and the Layer 2 encapsulation. BFD can provide fast failure detection times for all media types, encapsulations, topologies, and routing protocols.



To enable BFD for RIP, both sides of the connection must receive an update message from the peer. By default, RIP does not export any routes. Therefore, you must enable update messages to be sent by configuring an export policy for routes before a BFD session is triggered.

### Example: Configuring BFD for RIP

This example shows how to configure Bidirectional Forwarding Detection (BFD) for a RIP network.

- [Requirements on page 3565](#)
- [Overview on page 3565](#)
- [Configuration on page 3567](#)
- [Verification on page 3569](#)

#### Requirements

No special configuration beyond device initialization is required before configuring this example.

#### Overview

To enable failure detection, include the **bfd-liveness-detection** statement:

```
bfd-liveness-detection {
  detection-time {
    threshold milliseconds;
  }
  minimum-interval milliseconds;
  minimum-receive-interval milliseconds;
  multiplier number;
  no-adaptation;
  transmit-interval {
    threshold milliseconds;
    minimum-interval milliseconds;
  }
  version (1 | automatic);
}
```

Optionally, you can specify the threshold for the adaptation of the detection time by including the **threshold** statement. When the BFD session detection time adapts to a value equal to or greater than the threshold, a single trap and a system log message are sent.

To specify the minimum transmit and receive interval for failure detection, include the **minimum-interval** statement. This value represents the minimum interval at which the local routing device transmits hello packets as well as the minimum interval at which the routing device expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a value in the range from 1 through 255,000 milliseconds. This examples sets a minimum interval of 600 milliseconds.





**NOTE:** BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD of less than 100 ms for Routing Engine-based sessions and 10 ms for distributed BFD sessions can cause undesired BFD flapping.

Depending on your network environment, these additional recommendations might apply:

- For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of 300 ms for Routing Engine-based sessions and 100 ms for distributed BFD sessions.
- For very large-scale network deployments with a large number of BFD sessions, contact Juniper Networks customer support for more information.
- For BFD sessions to remain up during a Routing Engine switchover event when nonstop active routing (NSR) is configured, specify a minimum interval of 2500 ms for Routing Engine-based sessions. For distributed BFD sessions with nonstop active routing configured, the minimum interval recommendations are unchanged and depend only on your network deployment.

---

You can optionally specify the minimum transmit and receive intervals separately.

To specify only the minimum receive interval for failure detection, include the **minimum-receive-interval** statement. This value represents the minimum interval at which the local routing device expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a value in the range from 1 through 255,00 milliseconds.

To specify only the minimum transmit interval for failure detection, include the **transmit-interval minimum-interval** statement. This value represents the minimum interval at which the local routing device transmits hello packets to the neighbor with which it has established a BFD session. You can configure a value in the range from 1 through 255,000 milliseconds.

To specify the number of hello packets not received by a neighbor that causes the originating interface to be declared down, include the **multiplier** statement. The default is 3, and you can configure a value in the range from 1 through 255.

To specify the threshold for detecting the adaptation of the transmit interval, include the **transmit-interval threshold** statement. The threshold value must be greater than the transmit interval.

To specify the BFD version used for detection, include the **version** statement. The default is to have the version detected automatically.


You can trace BFD operations by including the **traceoptions** statement at the **[edit protocols bfd]** hierarchy level.



In Junos OS Release 9.0 and later, you can configure BFD sessions not to adapt to changing network conditions. To disable BFD adaptation, include the **no-adaptation** statement. We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation enabled in your network.

[Figure 112 on page 3567](#) shows the topology used in this example.

**Figure 112: RIP BFD Network Topology**

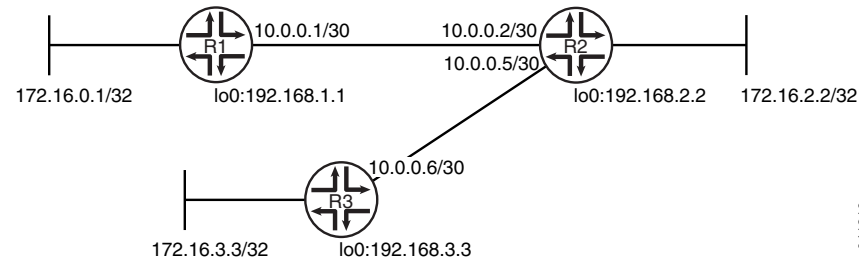

[“CLI Quick Configuration” on page 3567](#) shows the configuration for all of the devices in [Figure 112 on page 3567](#). The section [“Step-by-Step Procedure” on page 3568](#) describes the steps on Device R1.

### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```
set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.1/30
set protocols bfd traceoptions file bfd-trace
set protocols bfd traceoptions flag all
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.1
set protocols rip group rip-group bfd-liveness-detection minimum-interval 600
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
```

**Device R2**

```
set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.2/30
set interfaces fe-1/2/1 unit 5 family inet address 10.0.0.5/30
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.2
set protocols rip group rip-group neighbor fe-1/2/1.5
set protocols rip group rip-group bfd-liveness-detection minimum-interval 600
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
```

**Device R3**

```
set interfaces fe-1/2/0 unit 6 family inet address 10.0.0.6/30
set protocols rip group rip-group export advertise-routes-through-rip
```



```
set protocols rip group rip-group neighbor fe-1/2/0.6
set protocols rip group rip-group bfd-liveness-detection minimum-interval 600
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
```

**Step-by-Step  
Procedure**

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure a BFD for a RIP network:

1. Configure the network interfaces.

```
[edit interfaces]
user@R1# set fe-1/2/0 unit 1 family inet address 10.0.0.1/30
```

2. Create the RIP group and add the interface.

To configure RIP in Junos OS, you must configure a group that contains the interfaces on which RIP is enabled. You do not need to enable RIP on the loopback interface.

```
[edit protocols rip group rip-group]
user@R1# set neighbor fe-1/2/0.1
```

3. Create the routing policy to advertise both direct and RIP-learned routes.

```
[edit policy-options policy-statement advertise-routes-through-rip term 1]
user@R1# set from protocol direct
user@R1# set from protocol rip
user@R1# set then accept
```

4. Apply the routing policy.

In Junos OS, you can only apply RIP export policies at the group level.

```
[edit protocols rip group rip-group]
user@R1# set export advertise-routes-through-rip
```

5. Enable BFD.

```
[edit protocols rip group rip-group]
user@R1# set bfd-liveness-detection minimum-interval 600
```

6. Configure tracing operations to track BFD messages.

```
[edit protocols bfd traceoptions]
user@R1# set file bfd-trace
user@R1# set flag all
```

**Results**

From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show policy-options** commands. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
user@R1# show interfaces
fe-1/2/0 {
```



```

unit 1 {
    family inet {
        address 10.0.0.1/30;
    }
}

user@R1# show protocols
bfd {
    traceoptions {
        file bfd-trace;
        flag all;
    }
}
rip {
    group rip-group {
        export advertise-routes-through-rip;
        bfd-liveness-detection {
            minimum-interval 600;
        }
        neighbor fe-1/2/0.1;
    }
}

user@R1# show policy-options
policy-statement advertise-routes-through-rip {
    term 1 {
        from protocol [ direct rip ];
        then accept;
    }
}

```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.

- [Verifying That the BFD Sessions Are Up on page 3569](#)
- [Checking the BFD Trace File on page 3570](#)

### Verifying That the BFD Sessions Are Up

**Purpose** Make sure that the BFD sessions are operating.

**Action** From operational mode, enter the **show bfd session** command.

```

user@R1> show bfd session

```

| Address  | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|----------|-------|------------|-------------|-------------------|------------|
| 10.0.0.2 | Up    | fe-1/2/0.1 | 1.800       | 0.600             | 3          |

```

1 sessions, 1 clients
Cumulative transmit rate 1.7 pps, cumulative receive rate 1.7 pps

```

**Meaning** The output shows that there are no authentication failures.



### Checking the BFD Trace File

**Purpose** Use tracing operations to verify that BFD packets are being exchanged.

**Action** From operational mode, enter the **show log** command.

```
user@R1> show log bfd-trace
Feb 16 10:26:32 PPM Trace: BFD periodic xmit to 10.0.0.2 (IFL 124, rtbl 53,
single-hop port)
Feb 16 10:26:32 Received Downstream TraceMsg (24) len 86:
Feb 16 10:26:32   IfIndex (3) len 4: 0
Feb 16 10:26:32   Protocol (1) len 1: BFD
Feb 16 10:26:32   Data (9) len 61: (hex) 42 46 44 20 70 61 63 6b 65 74 20 66 72
6f 6d 20 31 30 2e
Feb 16 10:26:32 PPM Trace: BFD packet from 10.0.0.1 (IFL 73, rtbl 56, ttl 255)
absorbed
Feb 16 10:26:32 Received Downstream TraceMsg (24) len 60:
Feb 16 10:26:32   IfIndex (3) len 4: 0
Feb 16 10:26:32   Protocol (1) len 1: BFD
Feb 16 10:26:32   Data (9) len 35: (hex) 42 46 44 20 70 65 72 69 6f 64 69 63 20
78 6d 69 74 20 6f
...
```

**Meaning** The output shows the normal functioning of BFD.

**Related Documentation**

- [Example: Configuring RIP on page 3551](#)
- [Example: Configuring Authentication for RIP Routes on page 3558](#)
- [Example: Configuring Point-to-Multipoint RIP Networks](#)

### Example: Configuring BFD Authentication for RIP

- [Understanding BFD Authentication for RIP on page 3570](#)
- [Example: Configuring BFD Authentication for RIP on page 3572](#)

---

#### Understanding BFD Authentication for RIP

BFD enables rapid detection of communication failures between adjacent systems. By default, authentication for BFD sessions is disabled. However, when running BFD over Network Layer protocols, the risk of service attacks can be significant. We strongly recommend using authentication if you are running BFD over multiple hops or through insecure tunnels. Beginning with Junos OS Release 9.6, Junos OS supports authentication for BFD sessions running over RIP. BFD authentication is only supported in the domestic image and is not available in the export image.

You authenticate BFD sessions by specifying an authentication algorithm and keychain, and then associating that configuration information with a security authentication keychain using the keychain name.



The following sections describe the supported authentication algorithms, security keychains, and the level of authentication that can be configured:

- [BFD Authentication Algorithms on page 3571](#)
- [Security Authentication Keychains on page 3571](#)
- [Strict Versus Loose Authentication on page 3572](#)

### ***BFD Authentication Algorithms***

Junos OS supports the following algorithms for BFD authentication:

- **simple-password**—Plain-text password. One to 16 bytes of plain text are used to authenticate the BFD session. One or more passwords can be configured. This method is the least secure and should be used only when BFD sessions are not subject to packet interception.
- **keyed-md5**—Keyed Message Digest 5 hash algorithm for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed MD5 uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than or equal to the last sequence number received. Although more secure than a simple password, this method is vulnerable to replay attacks. Increasing the rate at which the sequence number is updated can reduce this risk.
- **meticulous-keyed-md5**—Meticulous keyed Message Digest 5 hash algorithm. This method works in the same manner as keyed MD5, but the sequence number is updated with every packet. Although more secure than keyed MD5 and simple passwords, this method might take additional time to authenticate the session.
- **keyed-sha-1**—Keyed Secure Hash Algorithm I for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed SHA uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. The key is not carried within the packets. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than the last sequence number received.
- **meticulous-keyed-sha-1**—Meticulous keyed Secure Hash Algorithm I. This method works in the same manner as keyed SHA, but the sequence number is updated with every packet. Although more secure than keyed SHA and simple passwords, this method might take additional time to authenticate the session.



**NOTE:** Nonstop active routing is not supported with meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

### ***Security Authentication Keychains***

The security authentication keychain defines the authentication attributes used for authentication key updates. When the security authentication keychain is configured and



associated with a protocol through the keychain name, authentication key updates can occur without interrupting routing and signaling protocols.

The authentication keychain contains one or more keychains. Each keychain contains one or more keys. Each key holds the secret data and the time at which the key becomes valid. The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.

BFD allows multiple clients per session, and each client can have its own keychain and algorithm defined. To avoid confusion, we recommend specifying only one security authentication keychain.

### ***Strict Versus Loose Authentication***

By default, strict authentication is enabled and authentication is checked at both ends of each BFD session. Optionally, to smooth migration from nonauthenticated sessions to authenticated sessions, you can configure *loose checking*. When loose checking is configured, packets are accepted without authentication being checked at each end of the session. This feature is intended for transitional periods only.

---

### **Example: Configuring BFD Authentication for RIP**

This example shows how to configure Bidirectional Forwarding Detection (BFD) authentication for a RIP network.

- [Requirements on page 3572](#)
- [Overview on page 3572](#)
- [Configuration on page 3573](#)
- [Verification on page 3577](#)

#### ***Requirements***

No special configuration beyond device initialization is required before configuring this example.

The devices must be running Junos OS Release 9.6 or later.

#### ***Overview***


Only three steps are needed to configure authentication on a BFD session:

1. Specify the BFD authentication algorithm for the RIP protocol.
2. Associate the authentication keychain with the RIP protocol.
3. Configure the related security authentication keychain.

[Figure 113 on page 3573](#) shows the topology used in this example.



Figure 113: RIP BFD Authentication Network Topology

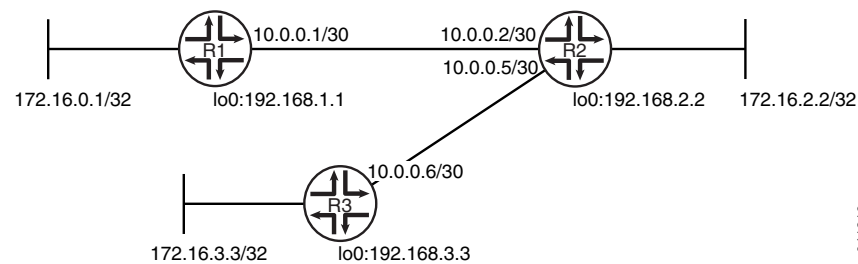

"CLI Quick Configuration" on page 3573 shows the configuration for all of the devices in Figure 113 on page 3573. The section "Step-by-Step Procedure" on page 3574 describes the steps on Device R1.

### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```

set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.1/30
set protocols bfd traceoptions file bfd-trace
set protocols bfd traceoptions flag all
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.1
set protocols rip group rip-group bfd-liveness-detection minimum-interval 600
set protocols rip group rip-group bfd-liveness-detection authentication key-chain bfd-rip
set protocols rip group rip-group bfd-liveness-detection authentication algorithm
    keyed-md5
set protocols rip group rip-group bfd-liveness-detection authentication loose-check
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
    direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
    rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
set security authentication-key-chains key-chain bfd-rip key 53 secret
    "$9$dlV2aZGi.fzDiORSeXxDikqmT"
set security authentication-key-chains key-chain bfd-rip key 53 start-time
    "2012-2-16.12:00:00 -0800"

```

**Device R2**

```

set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.2/30
set interfaces fe-1/2/1 unit 5 family inet address 10.0.0.5/30
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.2
set protocols rip group rip-group neighbor fe-1/2/1.5
set protocols rip group rip-group bfd-liveness-detection minimum-interval 600
set protocols rip group rip-group bfd-liveness-detection authentication key-chain bfd-rip
set protocols rip group rip-group bfd-liveness-detection authentication algorithm
    keyed-md5
set protocols rip group rip-group bfd-liveness-detection authentication loose-check
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
    direct

```



```
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
set security authentication-key-chains key-chain bfd-rip key 53 secret
  "$9$d1V2aZGi.fzDiORSeXxDikqmT"
set security authentication-key-chains key-chain bfd-rip key 53 start-time
  "2012-2-16.12:00:00 -0800"
```

**Device R3**

```
set interfaces fe-1/2/0 unit 6 family inet address 10.0.0.6/30
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.6
set protocols rip group rip-group bfd-liveness-detection minimum-interval 600
set protocols rip group rip-group bfd-liveness-detection authentication key-chain bfd-rip
set protocols rip group rip-group bfd-liveness-detection authentication algorithm
  keyed-md5
set protocols rip group rip-group bfd-liveness-detection authentication loose-check
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
set security authentication-key-chains key-chain bfd-rip key 53 secret
  "$9$d1V2aZGi.fzDiORSeXxDikqmT"
set security authentication-key-chains key-chain bfd-rip key 53 start-time
  "2012-2-16.12:00:00 -0800"
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure a BFD authentication:

1. Configure the network interfaces.

```
[edit interfaces]
user@R1# set fe-1/2/0 unit 1 family inet address 10.0.0.1/30
```

2. Create the RIP group and add the interface.

To configure RIP in Junos OS, you must configure a group that contains the interfaces on which RIP is enabled. You do not need to enable RIP on the loopback interface.

```
[edit protocols rip group rip-group]
user@R1# set neighbor fe-1/2/0.1
```

3. Create the routing policy to advertise both direct and RIP-learned routes.

```
[edit policy-options policy-statement advertise-routes-through-rip term 1]
user@R1# set from protocol direct
user@R1# set from protocol rip
user@R1# set then accept
```

4. Apply the routing policy.

In Junos OS, you can only apply RIP export policies at the group level.

```
[edit protocols rip group rip-group]
user@R1# set export advertise-routes-through-rip
```



5. Enable BFD.

```
[edit protocols rip group rip-group]
user@R1# set bfd-liveness-detection minimum-interval 600
```

6. Specify the algorithm (**keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, **meticulous-keyed-sha-1**, or **simple-password**) to use.



**NOTE:** Nonstop active routing is not supported with meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

```
[edit protocols rip group rip-group]
user@R1# set bfd-liveness-detection authentication algorithm keyed-md5
```

7. Specify the keychain to be used to associate BFD sessions on RIP with the unique security authentication keychain attributes.

The keychain you specify must match a keychain name configured at the **[edit security authentication key-chains]** hierarchy level.

The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.

```
[edit protocols rip group rip-group]
user@R1# set bfd-liveness-detection authentication key-chain bfd-rip
```

8. (Optional) Specify loose authentication checking if you are transitioning from nonauthenticated sessions to authenticated sessions.

```
[edit protocols rip group rip-group]
user@R1# set bfd-liveness-detection authentication loose-check
```

9. Specify the unique security authentication information for BFD sessions:

- The matching keychain name as specified in Step 7.
- At least one key, a unique integer between 0 and 63. Creating multiple keys allows multiple clients to use the BFD session.
- The secret data used to allow access to the session.
- The time at which the authentication key becomes active, in the format *yyyy-mm-dd.hh:mm:ss*.

```
[edit security authentication-key-chains key-chain bfd-rip]
user@R1# set key 53 secret "$9$d1V2aZGi.fzDiORSeXxDikqmT"
user@R1# set key 53 start-time "2012-2-16.12:00:00 -0800"
```

10. Configure tracing operations to track BFD authentication.

```
[edit protocols bfd traceoptions]
user@R1# set file bfd-trace
user@R1# set flag all
```



**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show security** commands. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 1 {
    family inet {
      address 10.0.0.1/30;
    }
  }
}

user@R1# show protocols
bfd {
  traceoptions {
    file bfd-trace;
    flag all;
  }
}
rip {
  group rip-group {
    export advertise-routes-through-rip;
    bfd-liveness-detection {
      minimum-interval 600;
    }
    neighbor fe-1/2/0.1;
  }
}

user@R1# show policy-options
policy-statement advertise-routes-through-rip {
  term 1 {
    from protocol [ direct rip ];
    then accept;
  }
}

user@R1# show security
authentication-key-chains {
  key-chain bfd-rip {
    key 53 {
      secret "$9$d1V2aZGi.fzDiORSeXxDikqmT"; ## SECRET-DATA
      start-time "2012-2-16.12:00:00 -0800";
    }
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.



**Verification**

Confirm that the configuration is working properly.

- [Verifying That the BFD Sessions Are Authenticated on page 3577](#)
- [Viewing Extensive Information About the BFD Authentication on page 3577](#)
- [Checking the BFD Trace File on page 3578](#)

**Verifying That the BFD Sessions Are Authenticated**

**Purpose** Make sure that the BFD sessions are authenticated.

**Action** From operational mode, enter the **show bfd session detail** command.

```
user@R1> show bfd session detail
```

| Address  | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|----------|-------|------------|-------------|-------------------|------------|
| 10.0.0.2 | Up    | fe-1/2/0.1 | 1.800       | 0.600             | 3          |

Client RIP, TX interval 0.600, RX interval 0.600, **Authenticate**  
 Session up time 01:39:34  
 Local diagnostic None, remote diagnostic None  
 Remote state Up, version 1  
 Logical system 6, routing table index 53

1 sessions, 1 clients  
 Cumulative transmit rate 1.7 pps, cumulative receive rate 1.7 pps

**Meaning** **Authenticate** is displayed to indicate that BFD authentication is configured.

**Viewing Extensive Information About the BFD Authentication**

**Purpose** View the keychain name, the authentication algorithm and mode for each client in the session, and the BFD authentication configuration status.

**Action** From operational mode, enter the **show bfd session extensive** command.

```
user@R1> show bfd session extensive
```

| Address  | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|----------|-------|------------|-------------|-------------------|------------|
| 10.0.0.2 | Up    | fe-1/2/0.1 | 1.800       | 0.600             | 3          |

Client RIP, TX interval 0.600, RX interval 0.600, **Authenticate**  
**keychain bfd-rip, algo keyed-md5, mode loose**  
 Session up time 01:46:29  
 Local diagnostic None, remote diagnostic None  
 Remote state Up, version 1  
 Logical system 6, routing table index 53  
 Min async interval 0.600, min slow interval 1.000  
 Adaptive async TX interval 0.600, RX interval 0.600  
 Local min TX interval 0.600, minimum RX interval 0.600, multiplier 3  
 Remote min TX interval 0.600, min RX interval 0.600, multiplier 3  
 Local discriminator 225, remote discriminator 226  
 Echo mode disabled/inactive  
**Authentication enabled/active, keychain bfd-rip, algo keyed-md5, mode loose**  
 Session ID: 0x300501

1 sessions, 1 clients  
 Cumulative transmit rate 1.7 pps, cumulative receive rate 1.7 pps



**Meaning** The output shows the keychain name, the authentication algorithm and mode for the client in the session, and the BFD authentication configuration status.

#### *Checking the BFD Trace File*

**Purpose** Use tracing operations to verify that BFD packets are being exchanged.

**Action** From operational mode, enter the **show log** command.

```
user@R1> show log bfd-trace
Feb 16 10:26:32 PPM Trace: BFD periodic xmit to 10.0.0.2 (IFL 124, rtbl 53,
single-hop port)
Feb 16 10:26:32 Received Downstream TraceMsg (24) len 86:
Feb 16 10:26:32   IfIndex (3) len 4: 0
Feb 16 10:26:32   Protocol (1) len 1: BFD
Feb 16 10:26:32   Data (9) len 61: (hex) 42 46 44 20 70 61 63 6b 65 74 20 66 72
6f 6d 20 31 30 2e
Feb 16 10:26:32 PPM Trace: BFD packet from 10.0.0.1 (IFL 73, rtbl 56, ttl 255)
absorbed
Feb 16 10:26:32 Received Downstream TraceMsg (24) len 60:
Feb 16 10:26:32   IfIndex (3) len 4: 0
Feb 16 10:26:32   Protocol (1) len 1: BFD
Feb 16 10:26:32   Data (9) len 35: (hex) 42 46 44 20 70 65 72 69 6f 64 69 63 20
78 6d 69 74 20 6f
...
```

**Meaning** The output shows the normal functioning of BFD.

- Related Documentation**
- [Example: Configuring BFD for RIP on page 3564](#)
  - [Example: Configuring Authentication for RIP Routes on page 3558](#)
  - [Example: Configuring RIP on page 3551](#)

## Example: Applying Policies to RIP Routes Imported from Neighbors

- [Understanding RIP Import Policy on page 3578](#)
- [Example: Applying Policies to RIP Routes Imported from Neighbors on page 3578](#)

---

### Understanding RIP Import Policy

The default RIP import policy is to accept all received RIP routes that pass a sanity check. To filter routes being imported by the local routing device from its neighbors, include the **import** statement, and list the names of one or more policies to be evaluated. If you specify more than one policy, they are evaluated in order (first to last) and the first matching policy is applied to the route. If no match is found, the local routing device does not import any routes.

---

### Example: Applying Policies to RIP Routes Imported from Neighbors

This example shows how to configure an import policy in a RIP network.

- [Requirements on page 3579](#)
- [Overview on page 3579](#)



- [Configuration on page 3579](#)
- [Verification on page 3582](#)

### Requirements

No special configuration beyond device initialization is required before configuring this example.


### Overview

In this example, Device R1 has an import policy that accepts the 10/8 and 192.168/16 RIP routes and rejects all other RIP routes. This means that the 172.16/16 RIP routes are excluded from Device R1's routing table.

An export policy is also shown because an export policy is required as part of the minimum configuration for RIP.

[Figure 114 on page 3579](#) shows the topology used in this example.

**Figure 114: RIP Import Policy Network Topology**

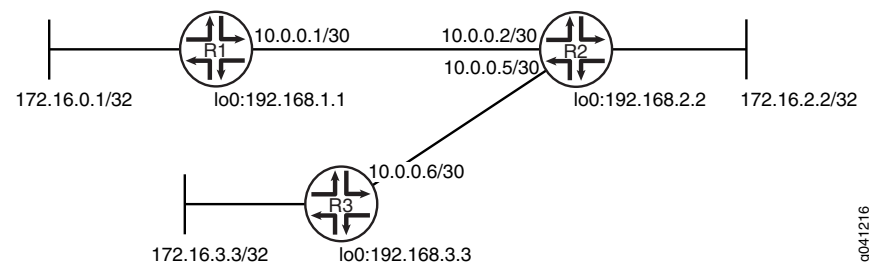

"[CLI Quick Configuration](#)" on [page 3579](#) shows the configuration for all of the devices in [Figure 114 on page 3579](#). The section "[Step-by-Step Procedure](#)" on [page 3580](#) describes the steps on Device R1.

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
Device R1
set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.1/30
set interfaces lo0 unit 1 family inet address 172.16.0.1/32
set interfaces lo0 unit 1 family inet address 192.168.1.1/32
set protocols rip import rip-import
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.1
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
set policy-options policy-statement rip-import term 1 from protocol rip
set policy-options policy-statement rip-import term 1 from route-filter 10.0.0.0/8 orlonger
set policy-options policy-statement rip-import term 1 from route-filter 192.168.0.0/16
  orlonger
```



```
set policy-options policy-statement rip-import term 1 then accept
set policy-options policy-statement rip-import term 2 then reject
```

**Device R2**

```
set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.2/30
set interfaces fe-1/2/1 unit 5 family inet address 10.0.0.5/30
set interfaces lo0 unit 2 family inet address 192.168.2.2/32
set interfaces lo0 unit 2 family inet address 172.16.2.2/32
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.2
set protocols rip group rip-group neighbor fe-1/2/1.5
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
```

**Device R3**

```
set interfaces fe-1/2/0 unit 6 family inet address 10.0.0.6/30
set interfaces lo0 unit 3 family inet address 192.168.3.3/32
set interfaces lo0 unit 3 family inet address 172.16.3.3/32
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.6
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure a RIP import policy:

1. Configure the network interfaces.

This example shows multiple loopback interface addresses to simulate attached networks.

```
[edit interfaces]
```

```
user@R1# set fe-1/2/0 unit 1 family inet address 10.0.0.1/30
```

```
user@R1# set lo0 unit 1 family inet address 172.16.0.1/32
```

```
user@R1# set lo0 unit 1 family inet address 192.168.1.1/32
```

2. Create the RIP group and add the interface.

To configure RIP in Junos OS, you must configure a group that contains the interfaces on which RIP is enabled.

You do not need to enable RIP on the loopback interface.

```
[edit protocols rip group rip-group]
```

```
user@R1# set neighbor fe-1/2/0.1
```

3. Create the routing policy to advertise both direct and RIP-learned routes.

```
[edit policy-options policy-statement advertise-routes-through-rip term 1]
```



```

user@R1# set from protocol direct
user@R1# set from protocol rip
user@R1# set then accept

```

4. Apply the routing policy.

In Junos OS, you can only apply RIP export policies at the group level.

```

[edit protocols rip group rip-group]
user@R1# set export advertise-routes-through-rip

```

5. Configure the import policy.

```

[edit policy-options policy-statement rip-import]
user@R1# set term 1 from protocol rip
user@R1# set term 1 from route-filter 10.0.0.0/8 orlonger
user@R1# set term 1 from route-filter 192.168.0.0/16 orlonger
user@R1# set term 1 then accept
user@R1# set term 2 then reject

```

6. Apply the import policy.

```

[edit protocols rip]
user@R1# set import rip-import

```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show policy-options** commands. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```

user@R1# show interfaces
fe-1/2/0 {
  unit 1 {
    family inet {
      address 10.0.0.1/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 172.16.0.1/32;
      address 192.168.1.1/32;
    }
  }
}

user@R1# show protocols
rip {
  import rip-import;
  group rip-group {
    export advertise-routes-through-rip;
    neighbor fe-1/2/0.1;
  }
}

user@R1# show policy-options
policy-statement advertise-routes-through-rip {

```



```
term 1 {  
    from protocol [ direct rip ];  
    then accept;  
}  
}  
policy-statement rip-import {  
    term 1 {  
        from {  
            protocol rip;  
            route-filter 10.0.0.0/8 orlonger;  
            route-filter 192.168.0.0/16 orlonger;  
        }  
        then accept;  
    }  
    term 2 {  
        then reject;  
    }  
}
```

If you are done configuring the device, enter **commit** from configuration mode.

### **Verification**

Confirm that the configuration is working properly.

- [Looking at the Routes That Device R2 Is Advertising to Device R1 on page 3582](#)
- [Looking at the Routes That Device R1 Is Receiving from Device R2 on page 3583](#)
- [Checking the Routing Table on page 3583](#)
- [Testing the Import Policy on page 3583](#)

### **Looking at the Routes That Device R2 Is Advertising to Device R1**

**Purpose** Verify that Device R2 is sending the expected routes.

**Action** From operational mode, enter the **show route advertising-protocol rip** command.

```
user@R2> show route advertising-protocol rip 10.0.0.2
```

```
inet.0: 11 destinations, 11 routes (11 active, 0 holddown, 0 hidden)  
+ = Active Route, - = Last Active, * = Both
```

```
10.0.0.4/30      *[Direct/0] 2d 01:17:44  
                 >   via fe-1/2/0.5  
172.16.2.2/32   *[Direct/0] 2d 04:09:52  
                 >   via lo0.2  
172.16.3.3/32   *[RIP/100] 23:40:02, metric 2, tag 0  
                 > to 10.0.0.6 via fe-1/2/0.5  
192.168.2.2/32  *[Direct/0] 2d 04:09:52  
                 >   via lo0.2  
192.168.3.3/32  *[RIP/100] 23:40:02, metric 2, tag 0  
                 > to 10.0.0.6 via fe-1/2/0.5
```

**Meaning** Device R2 is sending 172.16/16 routes to Device R1.



*Looking at the Routes That Device R1 Is Receiving from Device R2*

**Purpose** Verify that Device R1 is receiving the expected routes.

**Action** From operational mode, enter the **show route receive-protocol rip** command.

```
user@R1> show route receive-protocol rip 10.0.0.2
inet.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.4/30          *[RIP/100] 01:06:03, metric 2, tag 0
                    > to 10.0.0.2 via fe-1/2/0.1
192.168.2.2/32      *[RIP/100] 01:06:03, metric 2, tag 0
                    > to 10.0.0.2 via fe-1/2/0.1
192.168.3.3/32      *[RIP/100] 01:06:03, metric 3, tag 0
                    > to 10.0.0.2 via fe-1/2/0.1
```

**Meaning** The output shows that the 172.16/16 routes are excluded.

*Checking the Routing Table*

**Purpose** Verify that the routing table is populated with the expected routes.

**Action** From operational mode, enter the **show route protocol rip** command.

```
user@R1> show route protocol rip

inet.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.4/30          *[RIP/100] 00:54:34, metric 2, tag 0
                    > to 10.0.0.2 via fe-1/2/0.1
192.168.2.2/32      *[RIP/100] 00:54:34, metric 2, tag 0
                    > to 10.0.0.2 via fe-1/2/0.1
192.168.3.3/32      *[RIP/100] 00:54:34, metric 3, tag 0
                    > to 10.0.0.2 via fe-1/2/0.1
224.0.0.9/32        *[RIP/100] 00:49:00, metric 1
                    MultiRecv
```

**Meaning** The output shows that the routes have been learned from Device R2 and Device R3.

If you delete or deactivate the import policy, the routing table contains the 172.16/16 routes.

*Testing the Import Policy*

**Purpose** By using the **test policy** command, monitor the number of rejected prefixes.

**Action** From operational mode, enter the **test policy rip-import 172.16/16** command.

```
user@R1> test policy rip-import 172.16/16
Policy rip-import: 0 prefix accepted, 1 prefix rejected
```

**Meaning** The output shows that the policy rejected one prefix.



**Related Documentation**

- [Example: Configuring RIP on page 3551](#)

## Examples: Controlling Traffic with Metrics in a RIP Network

- [Understanding Traffic Control with Metrics in a RIP Network on page 3584](#)
- [Example: Controlling Traffic in a RIP Network with an Incoming Metric on page 3585](#)
- [Example: Controlling Traffic in a RIP Network with an Outgoing Metric on page 3586](#)
- [Example: Configuring the Metric Value Added to Imported RIP Routes on page 3588](#)

---

### Understanding Traffic Control with Metrics in a RIP Network

To tune a RIP network and to control traffic flowing through the network, you increase or decrease the cost of the paths through the network. RIP provides two ways to modify the path cost: an incoming metric and an outgoing metric, which are each set to 1 by default. In other words, by default, the metric of routes that RIP imports from a neighbor or exports to a neighbor is incremented by 1. These routes include those learned from RIP as well as those learned from other protocols. The metrics are attributes that specify the cost of any route advertised through a host. By increasing or decreasing the metrics—and thus the cost—of links throughout the network, you can control packet transmission across the network.

The incoming metric modifies the cost of an individual segment when a route across the segment is imported into the routing table. For example, if you set the incoming metric on the segment to **3**, the individual segment cost along the link is changed from 1 to **3**. The increased cost affects all route calculations through that link. Other routes that were previously excluded because of a high hop count might now be included in the router's forwarding table.

The outgoing metric modifies the path cost for all the routes advertised out of a particular interface. Unlike the incoming metric, the outgoing metric modifies the routes that other routers are learning and thereby controls the way they send traffic.

If an exported route was learned from a member of the same RIP group, the metric associated with that route is the normal RIP metric. For example, a RIP route with a metric of 5 learned from a neighbor configured with an incoming metric of 2 is advertised with a combined metric of 7 when advertised to neighbors in the same group. However, if this route was learned from a RIP neighbor in a different group or from a different protocol, the route is advertised with the metric value configured in the outgoing metric for that group.

You might want to increase the metric of routes to decrease the likelihood that a particular route is selected and installed in the routing table. This process is sometimes referred to as *route poisoning*. Some reasons that you might want to poison a route are that the route is relatively expensive to use, or it has relatively low bandwidth.

A route with a higher metric than another route becomes the active route only when the lower-metric route becomes unavailable. In this way, the higher-metric route serves as a backup path.



One way to increase the metric of imported routes is to configure an import policy. Another way is to include the **metric-in** statement in the RIP neighbor configuration. One way to increase the metric of export routes is to configure an export policy. Another way is to include the **metric-out** statement in the RIP neighbor configuration.

### Example: Controlling Traffic in a RIP Network with an Incoming Metric

This example shows how to control traffic with an incoming metric.

- [Requirements on page 3585](#)
- [Overview on page 3585](#)
- [Configuration on page 3586](#)
- [Verification on page 3586](#)


#### Requirements

Before you begin, define RIP groups, and add interfaces to the groups. Then configure a routing policy to export directly connected routes and routes learned through the RIP routing exchanges. See “[Example: Configuring a Basic RIP Network](#)” on page 3552.

#### Overview

In this example, routes to Router D are received by Router A across both of its RIP-enabled interfaces as shown in [Figure 115 on page 3585](#). Because the route through Router B and the route through Router C have the same number of hops, both routes are imported into the forwarding table. However, because the T3 link from Router B to Router D has a higher bandwidth than the T1 link from Router C to Router D, you want traffic to flow from Router A through Router B to Router D.

Figure 115: Controlling Traffic in a RIP Network with the Incoming Metric

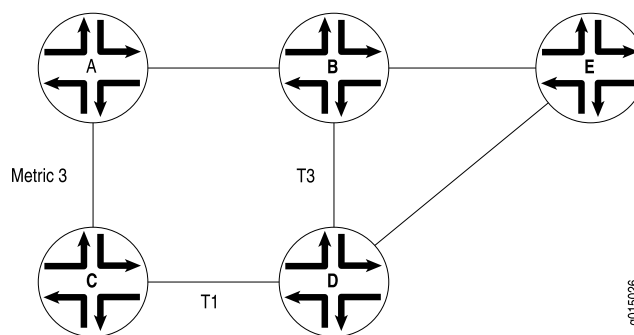

To force this flow, you can modify the route metrics as they are imported into Router A's routing table. By setting the incoming metric on the interface from Router A to Router C, you modify the metric on all routes received through that interface. Setting the incoming route metric on Router A changes only the routes in Router A's routing table, and affects only how Router A sends traffic to Router D. Router D's route selection is based on its own routing table, which, by default, includes no adjusted metric values.

In the example, Router C receives a route advertisement from Router D and readvertises the route to Router A. When Router A receives the route, it applies the incoming metric on the interface. Instead of incrementing the metric by 1 (the default), Router A increments it by 3 (the configured incoming metric), giving the route from Router A to Router D



through Router C a total path metric of 4. Because the route through Router B has a metric of 2, it becomes the preferred route for all traffic from Router A to Router D.

This example uses a RIP group called **alpha 1** on interface **ge3-0/0/0**.

### Configuration

#### Step-by-Step Procedure

To control traffic with an incoming metric:

1. Enable RIP on the interface.  

```
[edit protocols rip]  
user@host# set group alpha1 neighbor ge-0/0/0
```
2. Set the incoming metric.  

```
[edit protocols rip]  
user@host# set metric-in 3
```
3. If you are done configuring the device, commit the configuration.  

```
[edit]  
user@host# commit
```

### Verification

To verify that the configuration is working properly, enter the **show route protocols rip** command.

---

### Example: Controlling Traffic in a RIP Network with an Outgoing Metric

This example shows how to control traffic with an outgoing metric.

- [Requirements on page 3586](#)
- [Overview on page 3586](#)
- [Configuration on page 3587](#)
- [Verification on page 3587](#)

### Requirements

Before you begin:

- Define RIP groups, and add interfaces to the groups. Then configure a routing policy to export directly connected routes and routes learned through RIP routing exchanges. See [“Example: Configuring a Basic RIP Network” on page 3552](#).
- Control traffic with an incoming metric. See [“Example: Controlling Traffic in a RIP Network with an Incoming Metric” on page 3585](#).


### Overview

In this example, each route from Router A to Router D has two hops as shown in [Figure 116 on page 3587](#). However, because the link from Router A to Router B in the RIP group has a higher bandwidth than the link from Router A to Router C in RIP group Alpha 1, you want traffic from Router D to Router A to flow through Router B. To control the way Router D



sends traffic to Router A, you can alter the routes that Router D receives by configuring the outgoing metric on Router A's interfaces in the Alpha 1 RIP group.

**Figure 116: Controlling Traffic in a RIP Network with the Outgoing Metric**

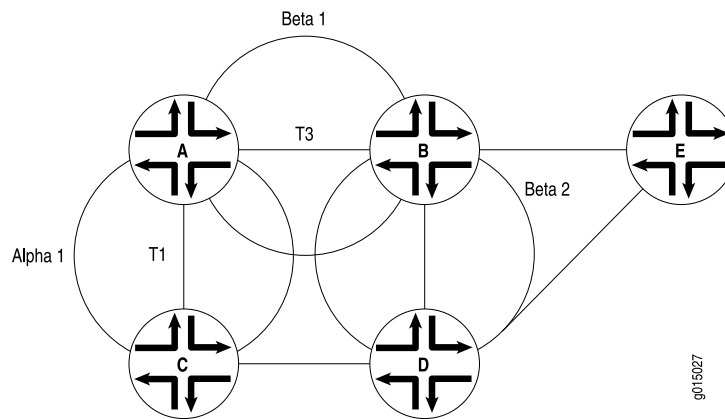

If the outgoing metric for the Alpha 1 RIP group—the A-to-C link—is changed to 3, Router D calculates the total path metric from Router A through Router C as 4. In contrast, the unchanged default total path metric to Router A through Router B in the RIP group is 2. The fact that Router A's interfaces belong to two different RIP groups allows you to configure two different outgoing metrics on its interfaces, because you configure path metrics at the group level.

By configuring the outgoing metric, you control the way Router A sends traffic to Router D. By configuring the outgoing metric on the same router, you control the way Router D sends traffic to Router A.

This example uses an outgoing metric of 3.

### Configuration

**Step-by-Step Procedure** To control traffic with an outgoing metric:

1. Set the outgoing metric.
 

```
[edit protocols rip group alpha1]
user@host# set metric-out 3
```
2. If you are done configuring the device, commit the configuration.
 

```
[edit]
user@host# commit
```

### Verification

To verify that the configuration is working properly, enter the **show protocols rip** command.



### Example: Configuring the Metric Value Added to Imported RIP Routes

This example shows how to change the default metric to be added to incoming routes to control the route selection process.

- [Requirements on page 3588](#)
- [Overview on page 3588](#)
- [Configuration on page 3588](#)
- [Verification on page 3591](#)

#### Requirements


No special configuration beyond device initialization is required before configuring this example.

#### Overview

Normally, when multiple routes are available, RIP selects the route with the lowest hop count. Changing the default metric enables you to control the route selection process such that a route with a higher hop count can be preferred over of a route with a lower hop count.

[Figure 117 on page 3588](#) shows the topology used in this example.

**Figure 117: RIP Incoming Metrics Network Topology**

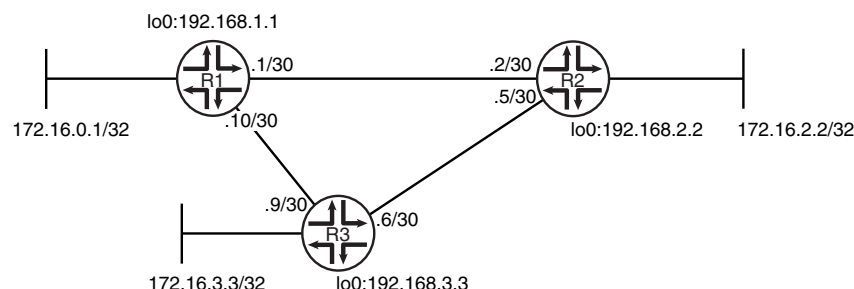

Device R1 has two potential paths to reach 172.16.2.2/32. The default behavior is to send traffic out the 0.1/30 interface facing Device R2. Suppose, though, that the path through Device R3 is less expensive to use or has higher bandwidth links. This example shows how to use the **metric-in** statement to ensure that Device R1 uses the path through Device R3 to reach 172.16.2.2/32. “[CLI Quick Configuration on page 3588](#)” shows the configuration for all of the devices in [Figure 117 on page 3588](#). The section “[Step-by-Step Procedure on page 3589](#)” describes the steps on Device R1.

#### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```
set interfaces fe-1/2/0 unit 1 description to-R2
set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.1/30
set interfaces ge-1/2/1 unit 10 description to-R3
```



```

set interfaces ge-1/2/1 unit 10 family inet address 10.0.0.10/30
set interfaces lo0 unit 1 family inet address 172.16.0.1/32
set interfaces lo0 unit 1 family inet address 192.168.1.1/32
set protocols rip group primary export advertise-routes-through-rip
set protocols rip group primary neighbor ge-1/2/1.10
set protocols rip group secondary export advertise-routes-through-rip
set protocols rip group secondary neighbor fe-1/2/0.1 metric-in 4
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept

```

**Device R2**

```

set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.2/30
set interfaces ge-1/2/1 unit 5 family inet address 10.0.0.5/30
set interfaces lo0 unit 2 family inet address 192.168.2.2/32
set interfaces lo0 unit 2 family inet address 172.16.2.2/32
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.2
set protocols rip group rip-group neighbor ge-1/2/1.5
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept

```

**Device R3**

```

set interfaces fe-1/2/0 unit 6 family inet address 10.0.0.6/30
set interfaces ge-1/2/1 unit 9 family inet address 10.0.0.9/30
set interfaces lo0 unit 3 family inet address 192.168.3.3/32
set interfaces lo0 unit 3 family inet address 172.16.3.3/32
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.6
set protocols rip group rip-group neighbor ge-1/2/1.9
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept

```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure a RIP metrics:

1. Configure the network interfaces.

```

[edit interfaces]
user@R1# set fe-1/2/0 unit 1 description to-R2
user@R1# set fe-1/2/0 unit 1 family inet address 10.0.0.1/30

user@R1# set ge-1/2/1 unit 10 description to-R3
user@R1# set ge-1/2/1 unit 10 family inet address 10.0.0.10/30

user@R1# set lo0 unit 1 family inet address 172.16.0.1/32

```



```
user@R1# set lo0 unit 1 family inet address 192.168.1.1/32
```

2. Create the RIP groups and add the interfaces.

To configure RIP in Junos OS, you must configure one or more groups that contain the interfaces on which RIP is enabled. You do not need to enable RIP on the loopback interface.

For the interface that is facing Device R2, the **metric-in 4** setting causes this route to be less likely to be chosen as the active route.

```
[edit protocols rip]
user@R1# set group primary neighbor ge-1/2/1.10
user@R1# set group secondary neighbor fe-1/2/0.1 metric-in 4
```

3. Create the routing policy to advertise both direct and RIP-learned routes.

```
[edit policy-options policy-statement advertise-routes-through-rip term 1]
user@R1# set from protocol direct
user@R1# set from protocol rip
user@R1# set then accept
```

4. Apply the routing policy.

In Junos OS, you can only apply RIP export policies at the group level.

```
[edit protocols rip]
user@R1# set group primary export advertise-routes-through-rip
user@R1# set group secondary export advertise-routes-through-rip
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show policy-options** commands. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 1 {
    description to-R2;
    family inet {
      address 10.0.0.1/30;
    }
  }
}
ge-1/2/1 {
  unit 10 {
    description to-R3;
    family inet {
      address 10.0.0.10/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 172.16.0.1/32;
      address 192.168.1.1/32;
    }
  }
}
```



```

    }
  }
user@R1# show protocols
rip {
  group primary {
    export advertise-routes-through-rip;
    neighbor ge-1/2/1.10;
  }
  group secondary {
    export advertise-routes-through-rip;
    neighbor fe-1/2/0.1 {
      metric-in 4;
    }
  }
}

user@R1# show policy-options
policy-statement advertise-routes-through-rip {
  term 1 {
    from protocol [ direct rip ];
    then accept;
  }
}

```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.

- [Verifying That the Expected Route Is Active on page 3591](#)
- [Removing the metric-in Statement on page 3591](#)

### Verifying That the Expected Route Is Active

**Purpose** Make sure that to reach 172.16.2.2/32, Device R1 uses the path through Device R3.

**Action** From operational mode, enter the **show route 172.16.2.2** command.

```

user@R1> show route 172.16.2.2
inet.0: 12 destinations, 12 routes (12 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

172.16.2.2/32      *[RIP/100] 00:15:46, metric 3, tag 0
                   > to 10.0.0.9 via ge-1/2/1.10

```

**Meaning** The **to 10.0.0.9 via ge-1/2/1.10** output shows that Device R1 uses the path through Device R3 to reach 172.16.2.2/32. The metric for this route is 3.

### Removing the metric-in Statement

**Purpose** Delete or deactivate the **metric-in** statement to see what happens to the 172.16.2.2/32 route.

**Action** 1. From configuration mode, deactivate the **metric-in** statement.



```
[edit protocols rip group secondary neighbor fe-1/2/0.1]
user@R1# deactivate metric-in
user@R1# commit
```

2. From operational mode, enter the **show route 172.16.2.2** command.

```
user@R1> show route 172.16.2.2
inet.0: 12 destinations, 12 routes (12 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

172.16.2.2/32      * [RIP/100] 00:00:06, metric 2, tag 0
> to 10.0.0.2 via fe-1/2/0.1
```

**Meaning** The **to 10.0.0.2 via fe-1/2/0.1** output shows that Device R1 uses the path through Device R2 to reach 172.16.2.2/32. The metric for this route is 2.

**Related Documentation**

- [Example: Applying Policies to RIP Routes Imported from Neighbors on page 3578](#)

## Example: Configuring the Sending and Receiving of RIPv1 and RIPv2 Packets

- [Understanding the Sending and Receiving of RIPv1 and RIPv2 Packets on page 3592](#)
- [Example: Configuring the Sending and Receiving of RIPv1 and RIPv2 Packets on page 3592](#)

### Understanding the Sending and Receiving of RIPv1 and RIPv2 Packets

RIP version 1 (RIPv1) and RIP version 2 (RIPv2) can run simultaneously. This might make sense when you are migrating a RIPv1 network to a RIPv2 network. This also allows interoperation with a device that supports RIPv1 but not RIPv2.

By default, when RIP is enabled on an interface, Junos OS receives both RIPv1 and RIPv2 packets and sends only RIPv2 packets. You can configure this behavior by including the [send](#) and [receive](#) statements in the RIP configuration.

### Example: Configuring the Sending and Receiving of RIPv1 and RIPv2 Packets

This example shows how to configure whether the RIP update messages conform to RIP version 1 (RIPv1) only, to RIP version 2 (RIPv2) only, or to both versions. You can also disable the sending or receiving of update messages.

- [Requirements on page 3592](#)
- [Overview on page 3592](#)
- [Configuration on page 3593](#)
- [Verification on page 3595](#)

#### **Requirements**

No special configuration beyond device initialization is required before configuring this example.


#### **Overview**

By default, when RIP is enabled on an interface, Junos OS receives both RIPv1 and RIPv2 packets and sends only RIPv2 packets.



Figure 118 on page 3593 shows the topology used in this example.

**Figure 118: Sending and Receiving RIPv1 and RIPv2 Packets Network Topology**

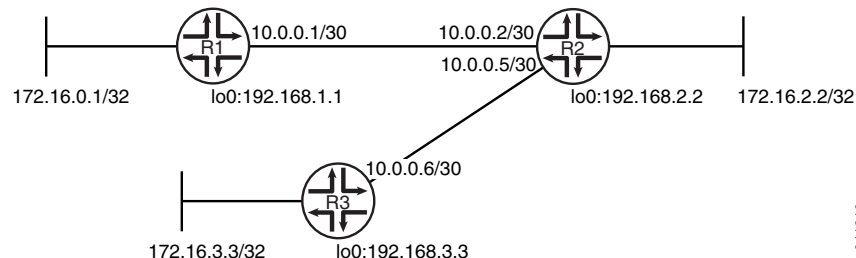

In this example, Device R1 is configured to receive only RIPv2 packets.

"CLI Quick Configuration" on page 3593 shows the configuration for all of the devices in Figure 118 on page 3593. The section "Step-by-Step Procedure" on page 3594 describes the steps on Device R1.

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```

Device R1
set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.1/30
set interfaces lo0 unit 1 family inet address 172.16.0.1/32
set interfaces lo0 unit 1 family inet address 192.168.1.1/32
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.1 receive version-2
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept

Device R2
set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.2/30
set interfaces fe-1/2/1 unit 5 family inet address 10.0.0.5/30
set interfaces lo0 unit 2 family inet address 192.168.2.2/32
set interfaces lo0 unit 2 family inet address 172.16.2.2/32
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.2
set protocols rip group rip-group neighbor fe-1/2/1.5
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept

Device R3
set interfaces fe-1/2/0 unit 6 family inet address 10.0.0.6/30
set interfaces lo0 unit 3 family inet address 192.168.3.3/32
set interfaces lo0 unit 3 family inet address 172.16.3.3/32
set protocols rip group rip-group export advertise-routes-through-rip

```



```
set protocols rip group rip-group neighbor fe-1/2/0.6
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
```

**Step-by-Step  
Procedure**

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure a RIP packet versions that can be received:

1. Configure the network interfaces.

```
[edit interfaces]
user@R1# set fe-1/2/0 unit 1 family inet address 10.0.0.1/30
```

```
user@R1# set lo0 unit 1 family inet address 172.16.0.1/32
user@R1# set lo0 unit 1 family inet address 192.168.1.1/32
```

2. Create the RIP groups and add the interfaces.

To configure RIP in Junos OS, you must configure one or more groups that contain the interfaces on which RIP is enabled. You do not need to enable RIP on the loopback interface.

For the interface that is facing Device R2, the **receive version-2** setting causes this interface to accept only RIPv2 packets.

```
[edit protocols rip group rip-group]
user@R1# set neighbor fe-1/2/0.1 receive version-2
```

3. Create the routing policy to advertise both direct and RIP-learned routes.

```
[edit policy-options policy-statement advertise-routes-through-rip term 1]
user@R1# set from protocol direct
user@R1# set from protocol rip
user@R1# set then accept
```

4. Apply the routing policy.

In Junos OS, you can only apply RIP export policies at the group level.

```
[edit protocols rip group rip-group]
user@R1# set export advertise-routes-through-rip
```

**Results**

From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show policy-options** commands. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 1 {
    family inet {
      address 10.0.0.1/30;
    }
  }
}
```



```

    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 172.16.0.1/32;
      address 192.168.1.1/32;
    }
  }
}

user@R1# show protocols
rip {
  group rip-group {
    export advertise-routes-through-rip;
    neighbor fe-1/2/0.1 {
      receive version-2;
    }
  }
}

user@R1# show policy-options
policy-statement advertise-routes-through-rip {
  term 1 {
    from protocol [ direct rip ];
    then accept;
  }
}

```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.

#### Verifying That the Receive Mode Is Set to RIPv2 Only

**Purpose** Make sure that the interfacing Device R2 is configured to receive only RIPv2 packets, instead of both RIPv1 and RIPv2 packets.

**Action** From operational mode, enter the **show rip neighbor** command.

```
user@R1> show rip neighbor
```

| Neighbor   | Local<br>State | Source<br>Address | Destination<br>Address | Send<br>Mode | Receive<br>Mode | In<br>Met |
|------------|----------------|-------------------|------------------------|--------------|-----------------|-----------|
| -----      | -----          | -----             | -----                  | ----         | -----           | ---       |
| fe-1/2/0.1 | Up             | 10.0.0.1          | 224.0.0.9              | mcast        | v2 only         | 1         |

**Meaning** In the output, the **Receive Mode** field displays **v2 only**. The default **Receive Mode** is **both**.

**Related Documentation**

- [Example: Configuring RIP on page 3551](#)



## Example: Redistributing Routes Among RIP Instances

- [Understanding Route Redistribution Among RIP instances on page 3596](#)
- [Example: Redistributing Routes Between Two RIP Instances on page 3597](#)

---

### Understanding Route Redistribution Among RIP instances

---

You can redistribute routes among RIP processes. Another way to say this is to export RIP routes from one RIP instance to other RIP instances.

In Junos OS, route redistribution among routing instances is accomplished by using routing table groups, also called RIB groups. Routing table groups allow you to import and export routes from a protocol within one routing table into another routing table.



**NOTE:** In contrast, the policy-based import and export functions allow you import and export routes between different protocols within the same routing table.

---

Consider the following partial example:

```
protocols {
  rip {
    rib-group inet-to-voice;
  }
}
routing-instances {
  voice {
    protocols {
      rip {
        rib-group voice-to-inet;
      }
    }
  }
}
routing-options {
  rib-groups {
    inet-to-voice {
      import-rib [ inet.0 voice.inet.0 ];
    }
    voice-to-inet {
      import-rib [ voice.inet.0 inet.0 ];
    }
  }
}
```

The way to read the **import-rib** statement is as follows. Take the routes from the protocol (RIP, in this case), and import them into the primary (or local) routing table and also into any other routing tables listed after this. The primary routing table is the routing table where the routing table group is being used. That would be either **inet.0** if used in the main routing instance or **voice.inet.0** if used within the routing instance. In the **inet-to-voice** routing table group, **inet.0** is listed first because this routing table group is used in the



main routing instance. In the **voice-to-inet** routing table group, **voice.inet.0** is listed first because this routing table group is used in the voice routing instance.

### Example: Redistributing Routes Between Two RIP Instances

This example shows how to configure a RIP routing instance and control the redistribution of RIP routes between the routing instance and the master instance.

- [Requirements on page 3597](#)
- [Overview on page 3597](#)
- [Configuration on page 3597](#)
- [Verification on page 3601](#)

#### Requirements


No special configuration beyond device initialization is required before configuring this example.

#### Overview

When you create a routing instance called voice, Junos OS creates a routing table called **voice.inet.0**. The example shows how to install routes learned through the master RIP instance into the **voice.inet.0** routing table. The example also shows how to install routes learned through the voice routing instance into **inet.0**. This is done by configuring routing table groups. RIP routes are installed into each routing table that belongs to a routing table group.

[Figure 119 on page 3597](#) shows the topology used in this example.

**Figure 119: Redistributing Routes Between RIP Instances Network Topology**

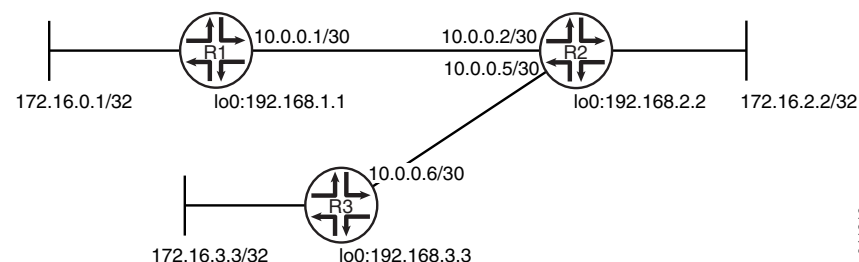

[“CLI Quick Configuration” on page 3597](#) shows the configuration for all of the devices in [Figure 119 on page 3597](#). The section [“Step-by-Step Procedure” on page 3598](#) describes the steps on Device R2.

#### Configuration

##### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```

set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.1/30
set interfaces lo0 unit 1 family inet address 172.16.0.1/32

```



```
set interfaces lo0 unit 1 family inet address 192.168.1.1/32
set protocols rip group to-R2 export advertise-routes-through-rip
set protocols rip group to-R2 neighbor fe-1/2/0.1
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
```

**Device R2**

```
set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.2/30
set interfaces fe-1/2/1 unit 5 family inet address 10.0.0.5/30
set interfaces lo0 unit 2 family inet address 192.168.2.2/32
set interfaces lo0 unit 2 family inet address 172.16.2.2/32
set protocols rip rib-group inet-to-voice
set protocols rip group to-R3 export advertise-routes-through-rip
set protocols rip group to-R3 neighbor fe-1/2/1.5
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
set routing-instances voice protocols rip group to-R1 export advertise-routes-through-rip
set routing-instances voice interface fe-1/2/0.2
set routing-instances voice protocols rip rib-group voice-to-inet
set routing-instances voice protocols rip group to-R1 neighbor fe-1/2/0.2
set routing-options rib-groups inet-to-voice import-rib inet.0
set routing-options rib-groups inet-to-voice import-rib voice.inet.0
set routing-options rib-groups voice-to-inet import-rib voice.inet.0
set routing-options rib-groups voice-to-inet import-rib inet.0
```

**Device R3**

```
set interfaces fe-1/2/0 unit 6 family inet address 10.0.0.6/30
set interfaces lo0 unit 3 family inet address 192.168.3.3/32
set interfaces lo0 unit 3 family inet address 172.16.3.3/32
set protocols rip group to-R2 export advertise-routes-through-rip
set protocols rip group to-R2 neighbor fe-1/2/0.6
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To redistribute RIP routes between routing instances:

1. Configure the network interfaces.

```
[edit interfaces]
user@R2# set fe-1/2/0 unit 2 family inet address 10.0.0.2/30

user@R2# set fe-1/2/1 unit 5 family inet address 10.0.0.5/30

user@R2# set lo0 unit 2 family inet address 192.168.2.2/32
```



```
user@R2# set lo0 unit 2 family inet address 172.16.2.2/32
```

2. Create the routing instance, and add one or more interfaces to the routing instance.

```
[edit routing-instances voice]
user@R2# set interface fe-1/2/0.2
```

3. Create the RIP groups and add the interfaces.

```
[edit protocols rip group to-R3]
user@R2# set neighbor fe-1/2/1.5

[edit routing-instances voice protocols rip group to-R1]
user@R2# set neighbor fe-1/2/0.2
```

4. Create the routing table groups.

```
[edit routing-options rib-groups]
user@R2# set inet-to-voice import-rib inet.0
user@R2# set inet-to-voice import-rib voice.inet.0

user@R2# set voice-to-inet import-rib voice.inet.0
user@R2# set voice-to-inet import-rib inet.0
```

5. Apply the routing table groups.

```
[edit protocols rip]
user@R2# set rib-group inet-to-voice

[edit routing-instances voice protocols rip]
user@R2# set rib-group voice-to-inet
```

6. Create the routing policy to advertise both direct and RIP-learned routes.

```
[edit policy-options policy-statement advertise-routes-through-rip term 1]
user@R2# set from protocol direct
user@R2# set from protocol rip
user@R2# set then accept
```

7. Apply the routing policy.

In Junos OS, you can only apply RIP export policies at the group level.

```
[edit protocols rip group to-R3]
user@R2# set export advertise-routes-through-rip

[edit routing-instances voice protocols rip group to-R1]
user@R2# set export advertise-routes-through-rip
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, **show routing-instances**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
user@R2# show interfaces
fe-1/2/0 {
  unit 2 {
    family inet {
```



```
        address 10.0.0.2/30;
    }
}
fe-1/2/1 {
    unit 5 {
        family inet {
            address 10.0.0.5/30;
        }
    }
}
lo0 {
    unit 2 {
        family inet {
            address 192.168.2.2/32;
            address 172.16.2.2/32;
        }
    }
}

user@R2# show protocols
rip {
    rib-group inet-to-voice;
    group to-R3 {
        export advertise-routes-through-rip;
        neighbor fe-1/2/1.5;
    }
}

user@R2# show policy-options
policy-statement advertise-routes-through-rip {
    term 1 {
        from protocol [ direct rip ];
        then accept;
    }
}

user@R2# show routing-instances
voice {
    interface fe-1/2/0.2;
    protocols {
        rip {
            rib-group voice-to-inet;
            group to-R1 {
                export advertise-routes-through-rip;
                neighbor fe-1/2/0.2;
            }
        }
    }
}

user@R2# show routing-options
rib-groups {
    inet-to-voice {
        import-rib [ inet.0 voice.inet.0 ];
    }
    voice-to-inet {
```



```

import-rib [ voice.inet.0 inet.0 ];
}
}

```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.

### Checking the Routing Tables

**Purpose** Make sure that the routing tables contain the expected routes.

**Action** From operational mode, enter the **show route protocol rip** command.

```

user@R2> show route protocol rip
inet.0: 9 destinations, 9 routes (9 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

172.16.0.1/32    * [RIP/100] 01:58:14, metric 2, tag 0
                 > to 10.0.0.1 via fe-1/2/0.2
172.16.3.3/32    * [RIP/100] 02:06:03, metric 2, tag 0
                 > to 10.0.0.6 via fe-1/2/0.5
192.168.1.1/32   * [RIP/100] 01:58:14, metric 2, tag 0
                 > to 10.0.0.1 via fe-1/2/0.2
192.168.3.3/32   * [RIP/100] 02:06:03, metric 2, tag 0
                 > to 10.0.0.6 via fe-1/2/0.5
224.0.0.9/32     * [RIP/100] 01:44:13, metric 1
                 MultiRecv

voice.inet.0: 7 destinations, 7 routes (7 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

172.16.0.1/32    * [RIP/100] 02:06:03, metric 2, tag 0
                 > to 10.0.0.1 via fe-1/2/0.2
172.16.3.3/32    * [RIP/100] 01:58:14, metric 2, tag 0
                 > to 10.0.0.6 via fe-1/2/0.5
192.168.1.1/32   * [RIP/100] 02:06:03, metric 2, tag 0
                 > to 10.0.0.1 via fe-1/2/0.2
192.168.3.3/32   * [RIP/100] 01:58:14, metric 2, tag 0
                 > to 10.0.0.6 via fe-1/2/0.5
224.0.0.9/32     * [RIP/100] 01:44:13, metric 1
                 MultiRecv

```

**Meaning** The output shows that both routing tables contain all of the RIP routes.

**Related Documentation**

- [Example: Configuring RIP on page 3551](#)
- [Example: Applying Policies to RIP Routes Imported from Neighbors on page 3578](#)

## Example: Configuring RIP Timers

- [Understanding RIP Timers on page 3602](#)
- [Example: Configuring RIP Timers on page 3603](#)



## Understanding RIP Timers

---

RIP uses several timers to regulate its operation.

The update interval is the interval at which routes that are learned by RIP are advertised to neighbors. This timer controls the interval between routing updates. The update interval is set to 30 seconds, by default, with a small random amount of time added when the timer is reset. This added time prevents congestion that can occur if all routing devices update their neighbors simultaneously.

To configure the update time interval, include the **update-interval** statement:

**update-interval** *seconds*;

*seconds* can be a value from 10 through 60.

You can set a route timeout interval. If a route is not refreshed after being installed in the routing table by the specified time interval, the route is marked as invalid and is removed from the routing table after the hold-down period expires.

To configure the route timeout for RIP, include the **route-timeout** statement:

**route-timeout** *seconds*;

*seconds* can be a value from 30 through 360. The default value is 180 seconds.

RIP routes expire when either a route timeout limit is met or a route metric reaches infinity, and the route is no longer valid. However, the expired route is retained in the routing table for a specified period so that neighbors can be notified that the route has been dropped. This time period is set by configuring the hold-down timer. Upon expiration of the hold-down timer, the route is removed from the routing table.

To configure the hold-down timer for RIP, include the **holddown** statement:

**holddown** *seconds*;

*seconds* can be a value from 10 through 180. The default value is 120 seconds.



**NOTE:** In Junos OS Release 11.1 and later, a retransmission timer is available for RIP demand circuits.

---

Generally, we recommend against changing the RIP timers, unless the effects of a change are well understood. The route timeout should be at least three times the update interval. The hold-down timer must be greater than the route timeout. Normally, the default values are best left in effect for standard operations.



### Example: Configuring RIP Timers

This example shows how to configure the RIP update interval and how to monitor the impact of the change.

- [Requirements on page 3603](#)
- [Overview on page 3603](#)
- [Configuration on page 3603](#)
- [Verification on page 3606](#)

#### Requirements

No special configuration beyond device initialization is required before configuring this example.

#### Overview


In this example, Device R2 has an update interval of 60 seconds for its neighbor, Device R1, and an update interval of 10 seconds for its neighbor, Device R3.

This example is not necessarily practical, but it is shown for demonstration purposes. Generally, we recommend against changing the RIP timers, unless the effects of a change are well understood. Normally, the default values are best left in effect for standard operations.

An export policy is also shown because an export policy is required as part of the minimum configuration for RIP.

[Figure 120 on page 3603](#) shows the topology used in this example.

**Figure 120: RIP Timers Network Topology**

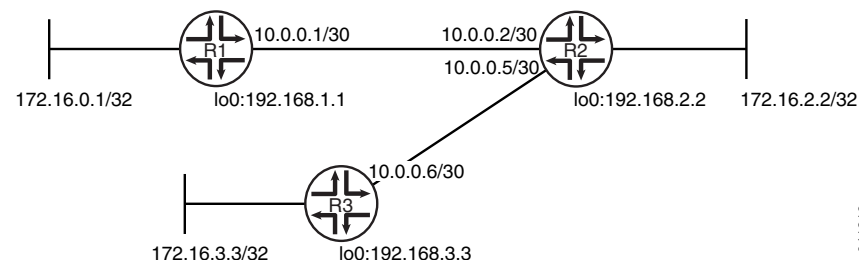

"CLI Quick Configuration" on [page 3603](#) shows the configuration for all of the devices in [Figure 120 on page 3603](#). The section "Step-by-Step Procedure" on [page 3604](#) describes the steps on Device R2.

#### Configuration

##### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```

set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.1/30
set interfaces lo0 unit 1 family inet address 172.16.0.1/32

```



```
set interfaces lo0 unit 1 family inet address 192.168.1.1/32
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.1
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
```

**Device R2**

```
set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.2/30
set interfaces fe-1/2/1 unit 5 family inet address 10.0.0.5/30
set interfaces lo0 unit 2 family inet address 192.168.2.2/32
set interfaces lo0 unit 2 family inet address 172.16.2.2/32
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.2 update-interval 60
set protocols rip group rip-group neighbor fe-1/2/1.5 update-interval 10
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
```

**Device R3**

```
set interfaces fe-1/2/0 unit 6 family inet address 10.0.0.6/30
set interfaces lo0 unit 3 family inet address 192.168.3.3/32
set interfaces lo0 unit 3 family inet address 172.16.3.3/32
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.6
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure the RIP update interval:

1. Configure the network interfaces.

This example shows multiple loopback interface addresses to simulate attached networks.

```
[edit interfaces]
user@R2# set fe-1/2/0 unit 2 family inet address 10.0.0.2/30
```

```
user@R2# set fe-1/2/1 unit 5 family inet address 10.0.0.5/30
```

```
user@R2# set lo0 unit 2 family inet address 192.168.2.2/32
user@R2# set lo0 unit 2 family inet address 172.16.2.2/32
```

2. Configure different update intervals for the two RIP neighbors.



To configure RIP in Junos OS, you must configure a group that contains the interfaces on which RIP is enabled. You do not need to enable RIP on the loopback interface.

```
[edit protocols rip group rip-group]
user@R2# set neighbor fe-1/2/0.2 update-interval 60
user@R2# set neighbor fe-1/2/1.5 update-interval 10
```

3. Create the routing policy to advertise both direct and RIP-learned routes.

```
[edit policy-options policy-statement advertise-routes-through-rip term 1]
user@R2# set from protocol direct
user@R2# set from protocol rip
user@R2# set then accept
```

4. Apply the routing policy.

In Junos OS, you can only apply RIP export policies at the group level.

```
[edit protocols rip group rip-group]
user@R2# set export advertise-routes-through-rip
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show policy-options** commands. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
user@R2# show interfaces
fe-1/2/0 {
  unit 2 {
    family inet {
      address 10.0.0.2/30;
    }
  }
}
fe-1/2/1 {
  unit 5 {
    family inet {
      address 10.0.0.5/30;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 192.168.2.2/32;
      address 172.16.2.2/32;
    }
  }
}

user@R2# show protocols
rip {
  group rip-group {
    export advertise-routes-through-rip;
    neighbor fe-1/2/0.2 {
      update-interval 60;
    }
  }
}
```



```

        neighbor fe-1/2/1.5 {
            update-interval 10;
        }
    }
}

user@R2# show policy-options
policy-statement advertise-routes-through-rip {
    term 1 {
        from protocol [ direct rip ];
        then accept;
    }
}

```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.

- [Checking the RIP Updates Sent by Device R2 on page 3606](#)
- [Checking the RIP Updates Received by Device R2 on page 3607](#)
- [Checking the RIP Updates Received by Device R3 on page 3607](#)

### Checking the RIP Updates Sent by Device R2

**Purpose** Make sure that the RIP update packets are sent at the expected interval.

**Action** From operational mode, enter the **show rip statistics** command.

```
user@R2> show rip statistics
```

```
RIPv2 info: port 520; holddown 120s.
```

```

    rts learned   rts held down   rqsts dropped   resps dropped
          4             2             0             0

```

```
fe-1/2/0.2: 2 routes learned; 5 routes advertised; timeout 180s; update interval 60s
```

| Counter                 | Total | Last 5 min | Last minute |
|-------------------------|-------|------------|-------------|
| Updates Sent            | 123   | 5          | 1           |
| Triggered Updates Sent  | 0     | 0          | 0           |
| Responses Sent          | 0     | 0          | 0           |
| Bad Messages            | 0     | 0          | 0           |
| RIPv1 Updates Received  | 0     | 0          | 0           |
| RIPv1 Bad Route Entries | 0     | 0          | 0           |
| RIPv1 Updates Ignored   | 0     | 0          | 0           |
| RIPv2 Updates Received  | 244   | 10         | 2           |
| RIPv2 Bad Route Entries | 0     | 0          | 0           |
| RIPv2 Updates Ignored   | 0     | 0          | 0           |
| Authentication Failures | 0     | 0          | 0           |
| RIP Requests Received   | 0     | 0          | 0           |
| RIP Requests Ignored    | 0     | 0          | 0           |
| none                    | 0     | 0          | 0           |

```
fe-1/2/1.5: 2 routes learned; 5 routes advertised; timeout 180s; update interval 10s
```

| Counter | Total | Last 5 min | Last minute |
|---------|-------|------------|-------------|
|---------|-------|------------|-------------|



|                         |     |    |   |
|-------------------------|-----|----|---|
| Updates Sent            | 734 | 32 | 6 |
| Triggered Updates Sent  | 0   | 0  | 0 |
| Responses Sent          | 0   | 0  | 0 |
| Bad Messages            | 0   | 0  | 0 |
| RIPv1 Updates Received  | 0   | 0  | 0 |
| RIPv1 Bad Route Entries | 0   | 0  | 0 |
| RIPv1 Updates Ignored   | 0   | 0  | 0 |
| RIPv2 Updates Received  | 245 | 11 | 2 |
| RIPv2 Bad Route Entries | 0   | 0  | 0 |
| RIPv2 Updates Ignored   | 0   | 0  | 0 |
| Authentication Failures | 0   | 0  | 0 |
| RIP Requests Received   | 0   | 0  | 0 |
| RIP Requests Ignored    | 0   | 0  | 0 |
| none                    | 0   | 0  | 0 |

**Meaning** The **update interval** field shows that the interval is 60 seconds for Neighbor R1 and 10 seconds for Neighbor R3. The **Updates Sent** field shows that Device R2 is sending updates to Device R1 at roughly 1/6 of the rate that it is sending updates to Device R3.

#### *Checking the RIP Updates Received by Device R2*

**Purpose** Make sure that the RIP update packets are sent at the expected interval.

**Action** From operational mode, enter the **show rip statistics** command.

```
user@R1> show rip statistics
```

```
RIPv2 info: port 520; holddown 120s.
```

```
    rts learned  rts held down  rqsts dropped  resps dropped
         5             0             0             0
```

```
fe-1/2/0.1: 5 routes learned; 2 routes advertised; timeout 180s; update interval
30s
```

| Counter                 | Total | Last 5 min | Last minute |
|-------------------------|-------|------------|-------------|
| -----                   | ----- | -----      | -----       |
| Updates Sent            | 312   | 10         | 2           |
| Triggered Updates Sent  | 2     | 0          | 0           |
| Responses Sent          | 0     | 0          | 0           |
| Bad Messages            | 0     | 0          | 0           |
| RIPv1 Updates Received  | 0     | 0          | 0           |
| RIPv1 Bad Route Entries | 0     | 0          | 0           |
| RIPv1 Updates Ignored   | 0     | 0          | 0           |
| RIPv2 Updates Received  | 181   | 5          | 1           |
| RIPv2 Bad Route Entries | 0     | 0          | 0           |
| RIPv2 Updates Ignored   | 0     | 0          | 0           |
| Authentication Failures | 0     | 0          | 0           |
| RIP Requests Received   | 1     | 0          | 0           |
| RIP Requests Ignored    | 0     | 0          | 0           |
| none                    | 0     | 0          | 0           |

**Meaning** The **RIPv2 Updates Received** field shows the number of updates received from Device R2.

#### *Checking the RIP Updates Received by Device R3*

**Purpose** Make sure that the RIP update packets are sent at the expected interval.



**Action** From operational mode, enter the **show rip statistics** command.

```

user@R3> show rip statistics
RIPv2 info: port 520; holddown 120s.
      rts learned   rts held down   rqsts dropped   resps dropped
           5             0             0             0

fe-1/2/0.6: 5 routes learned; 2 routes advertised; timeout 180s; update interval
30s
Counter              Total    Last 5 min    Last minute
-----
Updates Sent          314         11           2
Triggered Updates Sent 1           0           0
Responses Sent        0           0           0
Bad Messages          0           0           0
RIPv1 Updates Received 0           0           0
RIPv1 Bad Route Entries 0           0           0
RIPv1 Updates Ignored  0           0           0
RIPv2 Updates Received 827        31           6
RIPv2 Bad Route Entries 0           0           0
RIPv2 Updates Ignored  0           0           0
Authentication Failures 0           0           0
RIP Requests Received  0           0           0
RIP Requests Ignored   0           0           0
none                   0           0           0

```

**Meaning** The **RIPv2 Updates Received** field shows the number of updates received from Device R2.

**Related Documentation**

- [Example: Configuring RIP on page 3551](#)
- [Example: Configuring RIP Demand Circuits](#)

## Example: Tracing RIP Protocol Traffic

- [Understanding RIP Trace Operations on page 3608](#)
- [Example: Tracing RIP Protocol Traffic on page 3609](#)

### Understanding RIP Trace Operations

You can trace various types of RIP protocol traffic to help debug RIP protocol issues.

To trace RIP protocol traffic, include the **traceoptions** statement at the **[edit protocols rip]** hierarchy level:

```

traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable>;
    flag flag <flag-modifier> <disable>;
}

```

You can specify the following RIP protocol-specific trace options using the **flag** statement:

- **auth**—RIP authentication
- **error**—RIP error packets
- **expiration**—RIP route expiration processing



- **holddown**—RIP hold-down processing
- **nsr-synchronization**—Nonstop active routing synchronization events
- **packets**—All RIP packets
- **request**—RIP information packets
- **trigger**—RIP triggered updates
- **update**—RIP update packets

You can optionally specify one or more of the following flag modifiers:

- **detail**—Detailed trace information
- **receive**—Packets being received
- **send**—Packets being transmitted



**NOTE:** Use the **detail** flag modifier with caution as this may cause the CPU to become very busy.

Global tracing options are inherited from the configuration set by the **traceoptions** statement at the **[edit routing-options]** hierarchy level. You can override the following global trace options for the RIP protocol using the **traceoptions flag** statement included at the **[edit protocols rip]** hierarchy level:

- **all**—All tracing operations
- **general**—All normal operations and routing table changes (a combination of the normal and route trace operations)
- **normal**—Normal events
- **policy**—Policy processing
- **route**—Routing information
- **state**—State transitions
- **task**—Routing protocol task processing
- **timer**—Routing protocol timer processing



**NOTE:** Use the trace flag **all** with caution because this may cause the CPU to become very busy.

### Example: Tracing RIP Protocol Traffic

This example shows how to trace RIP protocol operations.

- [Requirements on page 3610](#)
- [Overview on page 3610](#)



- [Configuration on page 3610](#)
- [Verification on page 3612](#)

### Requirements

No special configuration beyond device initialization is required before configuring this example.


### Overview

In this example, Device R1 is set to trace routing information updates.

An export policy is also shown because an export policy is required as part of the minimum configuration for RIP.

[Figure 121 on page 3610](#) shows the topology used in this example.

**Figure 121: RIP Trace Operations Network Topology**

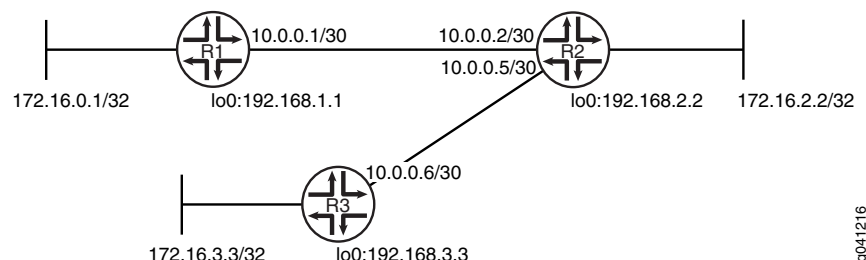

“CLI Quick Configuration” on [page 3610](#) shows the configuration for all of the devices in [Figure 121 on page 3610](#). The section “Step-by-Step Procedure” on [page 3611](#) describes the steps on Device R1.

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

#### Device R1

```
set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.1/30
set interfaces lo0 unit 1 family inet address 172.16.0.1/32
set interfaces lo0 unit 1 family inet address 192.168.1.1/32
set protocols rip traceoptions file rip-trace-file
set protocols rip traceoptions flag route
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.1
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
```

#### Device R2

```
set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.2/30
set interfaces fe-1/2/1 unit 5 family inet address 10.0.0.5/30
set interfaces lo0 unit 2 family inet address 192.168.2.2/32
set interfaces lo0 unit 2 family inet address 172.16.2.2/32
```



```

set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.2
set protocols rip group rip-group neighbor fe-1/2/1.5
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept

```

**Device R3**

```

set interfaces fe-1/2/0 unit 6 family inet address 10.0.0.6/30
set interfaces lo0 unit 3 family inet address 192.168.3.3/32
set interfaces lo0 unit 3 family inet address 172.16.3.3/32
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.6
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol
  rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept

```

**Step-by-Step  
Procedure**

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure the RIP update interval:

1. Configure the network interfaces.

This example shows multiple loopback interface addresses to simulate attached networks.

```

[edit interfaces]
user@R1# set fe-1/2/0 unit 1 family inet address 10.0.0.1/30

```

```

user@R1# set lo0 unit 1 family inet address 172.16.0.1/32
user@R1# set lo0 unit 1 family inet address 192.168.1.1/32

```

2. Configure the RIP group, and add the interface to the group.

To configure RIP in Junos OS, you must configure a group that contains the interfaces on which RIP is enabled. You do not need to enable RIP on the loopback interface.

```

[edit protocols rip group rip-group]
user@R1# set neighbor fe-1/2/0.1

```

3. Configure RIP tracing operations.

```

[edit protocols rip traceoptions]
user@R1# set file rip-trace-file
user@R1# set flag route

```

4. Create the routing policy to advertise both direct and RIP-learned routes.

```

[edit policy-options policy-statement advertise-routes-through-rip term 1]
user@R1# set from protocol direct
user@R1# set from protocol rip
user@R1# set then accept

```



5. Apply the routing policy.

In Junos OS, you can only apply RIP export policies at the group level.

```
[edit protocols rip group rip-group]
user@R1# set export advertise-routes-through-rip
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show policy-options** commands. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 1 {
    family inet {
      address 10.0.0.1/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 172.16.0.1/32;
      address 192.168.1.1/32;
    }
  }
}

user@R1# show protocols
rip {
  traceoptions {
    file rip-trace-file;
    flag route;
  }
  group rip-group {
    export advertise-routes-through-rip;
    neighbor fe-1/2/0.1;
  }
}

user@R1# show policy-options
policy-statement advertise-routes-through-rip {
  term 1 {
    from protocol [ direct rip ];
    then accept;
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

### **Verification**

Confirm that the configuration is working properly.



**Checking the Log File**

**Purpose** Make sure that the RIP route updates are logged in the configured log file.

**Action** 1. Deactivate the extra loopback interface address on Device R3.

```
[edit interfaces lo0 unit 3 family inet]
user@R3# deactivate address 172.16.3.3/32
user@R3# commit
```

2. From operational mode on Device R1, enter the **show log rip-trace-file** command with the **| match 172.16.3.3** option.

```
user@R1> show log rip-trace-file | match 172.16.3.3
Mar  1 11:39:53.975192 Setting RIPv2 rtbit on route 172.16.3.3/32, tsi =
0xbb69228
Mar  1 11:39:59.847118 172.16.3.3/32: metric-in: 16, change: 3 -> 16; # gw:
1, pkt_upd_src 10.0.0.2, inx: 0, rte_upd_src 10.0.0.2
Mar  1 11:39:59.847568 CHANGE 172.16.3.3/32 nhid 591 gw 10.0.0.2
RIP pref 100/0 metric 3/0 fe-1/2/0.1 <Delete Int>
Mar  1 11:39:59.847629 Best route to 172.16.3.3/32 got deleted. Doing route calculation
on the stored rte-info
```

**Meaning** The output shows that the route to 172.16.3.3/32 was deleted.


**Related Documentation**

- [Example: Configuring RIP on page 3551](#)



## RIP Configuration Statements

### any-sender

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>any-sender;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols rip group <i>group-name</i> <b>neighbor</b> <i>neighbor-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <b>neighbor</b> <i>neighbor-name</i>],</p> <p>[edit protocols rip group <i>group-name</i> <b>neighbor</b> <i>neighbor-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <b>neighbor</b> <i>neighbor-name</i>]</p> |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 8.0.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | <p>Disable strict sender address checks.</p> <p>If the sender of a RIP message does not belong to the subnet of the interface, the message is discarded. This situation might cause problems with dropped packets when RIP is running on point-to-point interfaces, or when the addresses on the interfaces do not fall in the same subnet. You can resolve this by disabling strict address checks on the RIP traffic.</p>                                                                                                                                |
|                                 | <div>  <p><b>NOTE:</b> The <code>any-sender</code> statement is supported only for peer-to-peer interfaces.</p> </div>                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring RIP on page 3551</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



## authentication-key (Protocols RIP)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>authentication-key password;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">rip</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>],</p> <p>[edit protocols <a href="#">rip</a>],</p> <p>[edit protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Require authentication for RIP route queries received on an interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <p><b>password</b>—Authentication password. If the password does not match, the packet is rejected. The password can be from 1 through 16 contiguous characters long and can include any ASCII strings.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Route Authentication for RIP on page 3558</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |



## authentication-type (Protocols RIP)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>authentication-type type;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">rip</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>],</p> <p>[edit protocols <a href="#">rip</a>],</p> <p>[edit protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Configure the type of authentication for RIP route queries received on an interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Default</b>                  | If you do not include this statement and the <b>authentication-key</b> statement, RIP authentication is disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <p><b>type</b>—Authentication type:</p> <ul style="list-style-type: none"> <li><b>md5</b>—Use the MD5 algorithm to create an encoded checksum of the packet. The encoded checksum is included in the transmitted packet. The receiving routing device uses the authentication key to verify the packet, discarding it if the digest does not match. This algorithm provides a more secure authentication scheme.</li> <li><b>none</b>—Disable authentication. If <b>none</b> is configured, the configured authentication key is ignored.</li> <li><b>simple</b>—Use a simple password. The password is included in the transmitted packet, which makes this method of authentication relatively insecure. The password can be from 1 through 16 contiguous letters or digits long.</li> </ul>                                                                                                                                                                         |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">Example: Configuring Route Authentication for RIP on page 3558</a></li> <li><a href="#">authentication-key on page 3615</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |



## bfd-liveness-detection (Protocols RIP)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> bfd-liveness-detection {     authentication {         algorithm <i>algorithm-name</i>;         key-chain <i>key-chain-name</i>;         loose-check;     }     detection-time {         threshold <i>milliseconds</i>;     }     minimum-interval <i>milliseconds</i>;     minimum-receive-interval <i>milliseconds</i>;     multiplier <i>number</i>;     no-adaptation;     transmit-interval {         minimum-interval <i>milliseconds</i>;         threshold <i>milliseconds</i>;     }     version (1   automatic); } </pre>                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols rip <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <b>neighbor</b> <i>neighbor-name</i>],</p> <p>[edit protocols rip <b>group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <b>neighbor</b> <i>neighbor-name</i>]</p>                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b> | <p>Statement introduced in Junos OS Release 8.0.</p> <p>Options <b>detection-time threshold</b> and <b>transmit-interval threshold</b> introduced in Junos OS Release 8.2.</p> <p>Support for logical systems introduced in Junos OS Release 8.3.</p> <p>Option <b>no-adaptation</b> introduced in Junos OS Release 9.0.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Options <b>authentication algorithm</b>, <b>authentication key-chain</b>, and <b>authentication loose-check</b> introduced in Junos OS Release 9.6.</p> <p>Options <b>authentication algorithm</b>, <b>authentication key-chain</b>, and <b>authentication loose-check</b> introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> |
| <b>Description</b>         | Configure bidirectional failure detection timers and authentication.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>             | <p><b>authentication algorithm <i>algorithm-name</i></b>—Configure the algorithm used to authenticate the specified BFD session: <b>simple-password</b>, <b>keyed-md5</b>, <b>keyed-sha-1</b>, <b>meticulous-keyed-md5</b>, or <b>meticulous-keyed-sha-1</b>.</p> <p><b>authentication key-chain <i>key-chain-name</i></b>—Associate a security key with the specified BFD session using the name of the security keychain. The name you specify must match one of the keychains configured in the <b>authentication-key-chains key-chain</b> statement at the <b>[edit security]</b> hierarchy level.</p>                                                                                                                                                                                                                     |



**authentication loose-check**—(Optional) Configure loose authentication checking on the BFD session. Use only for transitional periods when authentication is not configured at both ends of the BFD session.

**detection-time threshold *milliseconds***—Configure a threshold for the adaptation of the BFD session detection time. When the detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.

**minimum-interval *milliseconds***—Configure the minimum interval after which the local routing device transmits a hello packet and then expects to receive a reply from the neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can specify the minimum transmit and receive intervals separately using the **transmit-interval** **minimum-interval** and **minimum-receive-interval** statements.

**Range:** 1 through 255,000 milliseconds

**minimum-receive-interval *milliseconds***—Configure the minimum interval after which the local routing device expects to receive a reply from a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum receive interval using the **minimum-interval** statement.

**Range:** 1 through 255,000 milliseconds

**multiplier *number***—Configure the number of hello packets not received by a neighbor that causes the originating interface to be declared down.

**Range:** 1 through 255

**Default:** 3

**no-adaptation**—Configure BFD sessions not to adapt to changing network conditions. We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation enabled in your network.

**transmit-interval threshold *milliseconds***—Configure the threshold for the adaptation of the BFD session transmit interval. When the transmit interval adapts to a value greater than the threshold, a single trap and a single system message are sent. The interval threshold must be greater than the minimum transmit interval.

**Range:** 0 through 4,294,967,295 ( $2^{32} - 1$ )

**transmit-interval minimum-interval *milliseconds***—Configure a minimum interval after which the local routing device transmits hello packets to a neighbor. Optionally, instead of using this statement, you can configure the minimum transmit interval using the **minimum-interval** statement.

**Range:** 1 through 255,000

**version**—Configure the BFD version to detect: **1** (BFD version 1) or **automatic** (autodetect the BFD version).

**Default:** automatic

|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| <b>Required Privilege</b> | routing—To view this statement in the configuration.        |
| <b>Level</b>              | routing-control—To add this statement to the configuration. |



- Related Documentation**
- [Example: Configuring BFD for RIP on page 3565](#)
  - [Example: Configuring BFD Authentication for RIP on page 3572](#)




## check-zero

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (check-zero   no-check-zero);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | <pre>[edit logical-systems <i>logical-system-name</i> protocols <i>rip</i>], [edit logical-systems <i>logical-system-name</i> protocols rip group <i>group-name</i> <i>neighbor</i> <i>neighbor-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>rip</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <i>neighbor</i> <i>neighbor-name</i>], [edit protocols <i>rip</i>], [edit protocols rip group <i>group-name</i> <i>neighbor</i> <i>neighbor-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols <i>rip</i>], [edit routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <i>neighbor</i> <i>neighbor-name</i>]</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | <p>Some of the reserved fields in RIP version 1 packets must be zero, whereas in RIP version 2 packets, most of these reserved fields can contain nonzero values. By default, RIP discards version 1 packets that have nonzero values in the reserved fields and version 2 packets that have nonzero values in the fields that must be zero. This default behavior implements the RIP version 1 and version 2 specifications.</p> <p>If you find that you are receiving RIP version 1 packets with nonzero values in the reserved fields or RIP version 2 packets with nonzero values in the fields that must be zero, you can configure RIP to receive these packets even though they are being sent in violation of the specifications in RFC 1058 and RFC 2453.</p> <p>Check whether the reserved fields in a RIP packet are zero:</p> <ul style="list-style-type: none"><li>• <b>check-zero</b>—Discard version 1 packets that have nonzero values in the reserved fields and version 2 packets that have nonzero values in the fields that must be zero. This default behavior implements the RIP version 1 and version 2 specifications.</li><li>• <b>no-check-zero</b>—Receive RIP version 1 packets with nonzero values in the reserved fields or RIP version 2 packets with nonzero values in the fields that must be zero. This is in spite of the fact that they are being sent in violation of the specifications in RFC 1058 and RFC 2453.</li></ul> |
| <b>Default</b>                  | check-zero                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring RIP on page 3551</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |



## export (Protocols RIP)

|                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                   | <code>export [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>                                                                                                                                                                                          | <p>[edit logical-systems <i>logical-system-name</i> protocols rip <b>group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols rip <b>group</b> <i>group-name</i>],</p> <p>[edit protocols rip <b>group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols rip <b>group</b> <i>group-name</i>]</p>                                                                      |
| <b>Release Information</b>                                                                                                                                                                                      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>                                                                                                                                                                                              | <p>Apply a policy to routes being exported to the neighbors.</p> <p>By default, RIP does not export routes it has learned to its neighbors. To enable RIP to export routes, apply one or more export policies.</p> <p>If no routes match the policies, the local routing device does not export any routes to its neighbors. Export policies override any metric values determined through calculations involving the values configured with the <b>metric-in</b> and <b>metric-out</b> statements.</p> |
| <div>  <p><b>NOTE:</b> The export policy on RIP does not support manipulating routing information of the next hop.</p> </div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                                                                                                                                                                                                  | <i>policy-names</i> —Name of one or more policies.                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b>                                                                                                                                                                                 | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>                                                                                                                                                                                    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring RIP on page 3551</a></li> <li>• <a href="#">import on page 3625</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                |



## group (Protocols RIP)

---

```
Syntax  group group-name {
        bfd-liveness-detection {
            authentication {
                algorithm algorithm-name;
                key-chain key-chain-name;
                loose-check;
            }
            detection-time {
                threshold milliseconds;
            }
            minimum-interval milliseconds;
            minimum-receive-interval milliseconds;
            transmit-interval {
                threshold milliseconds;
                minimum-interval milliseconds;
            }
            multiplier number;
            version (0 | 1 | automatic);
        }
        demand-circuit;
        export policy;
        max-retrans-time seconds;
        metric-out metric;
        preference number;
        route-timeout seconds;
        update-interval seconds;
        neighbor neighbor-name {
            authentication-key password;
            authentication-type type;
            bfd-liveness-detection {
                authentication {
                    algorithm algorithm-name;
                    key-chain key-chain-name;
                    loose-check;
                }
                detection-time {
                    threshold milliseconds;
                }
                minimum-interval milliseconds;
                minimum-receive-interval milliseconds;
                transmit-interval {
                    threshold milliseconds;
                    minimum-interval milliseconds;
                }
                multiplier number;
                version (0 | 1 | automatic);
            }
            (check-zero | no-check-zero);
            demand-circuit;
            import policy-name;
            max-retrans-time seconds;
            message-size number;
```



```

    metric-in metric;
    metric-out metric;
    receive receive-options;
    route-timeout seconds;
    send send-options;
    update-interval seconds;
  }
}

```

|                                 |                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">rip</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a> ],<br>[edit protocols <a href="#">rip</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                          |
| <b>Description</b>              | Configure a set of RIP neighbors that share an export policy and metric. The export policy and metric govern what routes to advertise to neighbors in a given group. Each group must contain at least one neighbor. You should create a group for every export policy.                                                                                  |
| <b>Options</b>                  | <p><b><i>group-name</i></b>—Name of a group, up to 16 characters long.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                    |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring RIP on page 3551</a></li> </ul>                                                                                                                                                                                                                                               |



## holddown (Protocols RIP)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>holddown seconds;</code>                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">rip</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a> ],<br>[edit protocols <a href="#">rip</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a> ]                                                  |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                           |
| <b>Description</b>              | <p>Configure how long the expired route is retained in the routing table before being removed.</p> <p>When the hold-down timer runs on RIP demand circuits, routes are advertised as unreachable on other interfaces. When the hold-down timer expires, the route is removed from the routing table if all destinations detect that the route is unreachable or the remaining destinations are down.</p> |
| <b>Options</b>                  | <b>seconds</b> —Estimated time to wait before making updates to the routing table.<br><b>Range:</b> 10 through 180 seconds<br><b>Default:</b> 180 seconds                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring RIP Timers on page 3603</a></li><li>• <a href="#">RIP Demand Circuits Overview</a></li></ul>                                                                                                                                                                                                                                    |




## import (Protocols RIP)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>import [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">rip</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>],</p> <p>[edit protocols <a href="#">rip</a>],</p> <p>[edit protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Apply one or more policies to routes being imported by the local routing device from neighbors.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more policies.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Applying Policies to RIP Routes Imported from Neighbors on page 3578</a></li> <li>• Routing Policy Configuration Guide</li> <li>• <a href="#">export on page 3621</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |



## message-size

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>message-size <i>number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">rip</a>],</code><br><code>[edit logical-systems <i>logical-system-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor</a></code><br><code>  <i>neighbor-name</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code><br><code>  <a href="#">rip</a>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code><br><code>  rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>],</code><br><code>[edit protocols <a href="#">rip</a>],</code><br><code>[edit protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor</a></code><br><code>  <i>neighbor-name</i>]</code> |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement for SRX Series devices introduced in Junos OS Release 9.5.<br>Statement for J Series platform introduced in Junos OS Release 8.5.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Specify the number of route entries to be included in every RIP update message.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                                 | <div><div><b>TIP:</b> To ensure interoperability with other vendors' equipment, use the standard of 25 route entries per message. Do not change the default number of route entries in a RIP update message.</div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <b><i>number</i></b> —Number of route entries per update message.<br><b>Range:</b> 25 through 255 entries<br><b>Default:</b> 25 entries                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <b>routing</b> —To view this statement in the configuration.<br><b>routing-control</b> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring RIP on page 3551</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |



## metric-in (Protocols RIP)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>metric-in <i>metric</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">rip</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>],</p> <p>[edit protocols <a href="#">rip</a>],</p> <p>[edit protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Specify the metric to add to incoming routes when the routing device advertises into RIP routes that were learned from other protocols. Use this statement to configure the routing device to prefer RIP routes learned through a specific neighbor.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <p><i>metric</i>—Metric value.</p> <p><b>Range:</b> 1 through 16</p> <p><b>Default:</b> 1</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring the Metric Value Added to Imported RIP Routes on page 3588</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |



## metric-out (Protocols RIP)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>metric-out <i>metric</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> protocols rip group <i>group-name</i> <b>neighbor</b> <i>neighbor-name</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <b>neighbor</b> <i>neighbor-name</i>],</code><br><code>[edit protocols rip group <i>group-name</i> <b>neighbor</b> <i>neighbor-name</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <b>neighbor</b> <i>neighbor-name</i>]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | <p>Specify the metric value to add to routes transmitted to the neighbor. Use this statement to control how other routing devices prefer RIP routes sent from this neighbor.</p> <p>If you have included the <b>export</b> statement, RIP exports routes it has learned to the neighbors configured by including the <b>neighbor</b> statement.</p> <p>The metric associated with a RIP route (unless modified by an export policy) is the normal RIP metric. For example, a RIP route with a metric of 5 learned from a neighbor configured with a <b>metric-in</b> value of 2 is advertised with a combined metric of 7 when advertised to RIP neighbors in the same group. However, if this route was learned from a RIP neighbor in a different group or from a different protocol, the route is advertised with the metric value configured for that group with the <b>metric-out</b> statement.</p> <p>The metric for a route can be modified with an export policy. That metric is seen when the route is exported to the next hop.</p> <p>To increase the metric for routes advertised outside a group, include the <b>metric-out</b> statement.</p> |
| <b>Options</b>                  | <b><i>metric</i></b> —Metric value.<br><b>Range:</b> 1 through 16<br><b>Default:</b> 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | <b>routing</b> —To view this statement in the configuration.<br><b>routing-control</b> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Examples: Controlling Traffic with Metrics in a RIP Network on page 358450</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



## neighbor (Protocols RIP)

**Syntax** `neighbor neighbor-name {`  
     `authentication-key password;`  
     `authentication-type type;`  
     `bfd-liveness-detection {`  
         `authentication {`  
             `algorithm algorithm-name;`  
             `key-chain key-chain-name;`  
             `loose-check;`  
         `}`  
         `detection-time {`  
             `threshold milliseconds;`  
         `}`  
     `minimum-interval milliseconds;`  
     `minimum-receive-interval milliseconds;`  
     `transmit-interval {`  
         `threshold milliseconds;`  
         `minimum-interval milliseconds;`  
     `}`  
     `multiplier number;`  
     `version (0 | 1 | automatic);`  
     `}`  
     `(check-zero | no-check-zero);`  
     `demand-circuit;`  
     `import policy-name;`  
     `max-retrans-time seconds;`  
     `message-size number;`  
     `metric-in metric;`  
     `metric-out metric;`  
     `receive receive-options;`  
     `route-timeout seconds;`  
     `send send-options;`  
     `update-interval seconds;`  
     `}`

**Hierarchy Level** [edit logical-systems *logical-system-name* protocols rip **group** *group-name*],  
     [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols  
         rip **group** *group-name*],  
     [edit protocols rip **group** *group-name*],  
     [edit routing-instances *routing-instance-name* protocols rip **group** *group-name*]

**Release Information** Statement introduced before Junos OS Release 7.4.  
     Statement introduced in Junos OS Release 9.0 for EX Series switches.

**Description** Configure neighbor-specific RIP parameters, thereby overriding the defaults set for the routing device.

**Options** *neighbor-name*—Name of an interface over which a routing device communicates to its neighbors.

The remaining statements are explained separately.



**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring RIP on page 3551](#)

---

## preference (Protocols RIP)

---

**Syntax** `preference preference;`

**Hierarchy Level** [edit logical-systems *logical-system-name* protocols rip **group** *group-name*],  
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols  
rip **group** *group-name*],  
[edit protocols rip **group** *group-name*],  
[edit routing-instances *routing-instance-name* protocols rip **group** *group-name*]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.

**Description** Specify the preference of external routes learned by RIP as compared to those learned from other routing protocols.

By default, Junos OS assigns a preference of 100 to routes that originate from RIP. When Junos OS determines a route's preference to become the active route, the software selects the route with the lowest preference and installs this route into the forwarding table.

**Options** *preference*—Preference value. A lower value indicates a more preferred route.  
**Range:** 0 through 4,294,967,295 ( $2^{32} - 1$ )  
**Default:** 100

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Route Preferences Overview](#)



## receive (Protocols RIP)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>receive receive-options;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">rip</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor neighbor-name</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor neighbor-name</a>],</p> <p>[edit protocols <a href="#">rip</a>],</p> <p>[edit protocols rip group <i>group-name</i> <a href="#">neighbor neighbor-name</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor neighbor-name</a>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Configure RIP receive options.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <p><i>receive-options</i>—One of the following:</p> <ul style="list-style-type: none"> <li>• <b>both</b>—Accept both RIP version 1 and version 2 packets.</li> <li>• <b>none</b>—Do not receive RIP packets.</li> <li>• <b>version-1</b>—Accept only RIP version 1 packets.</li> <li>• <b>version-2</b>—Accept only RIP version 2 packets.</li> </ul> <p><b>Default:</b> <b>both</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring the Sending and Receiving of RIPv1 and RIPv2 Packets on page 3592</a></li> <li>• <a href="#">send on page 3634</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |



## rib-group (Protocols RIP)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>rib-group group-name;</code>                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">rip</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a> ],<br>[edit protocols <a href="#">rip</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                          |
| <b>Description</b>              | Install RIP routes into multiple routing tables by configuring a routing table group.                                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <i>group-name</i> —Name of the routing table group.                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Redistributing Routes Between Two RIP Instances on page 3597</a></li></ul>                                                                                                                                                                                                                 |

## rip

---

|                                 |                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>rip {...}</code>                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols],<br>[edit protocols],<br>[edit routing-instances <i>routing-instance-name</i> protocols] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                      |
| <b>Description</b>              | Enable RIP routing on the routing device.                                                                                                                                                                                                                           |
| <b>Default</b>                  | RIP is disabled on the routing device.                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring RIP on page 3551</a></li></ul>                                                                                                                                                             |



## route-timeout (Protocols RIP)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>route-timeout seconds;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">rip</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols rip <a href="#">group group-name</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols rip <a href="#">group group-name</a> neighbor <i>neighbor-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols rip <a href="#">group group-name</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols rip <a href="#">group group-name</a> neighbor <i>neighbor-name</i>],</p> <p>[edit protocols <a href="#">rip</a>],</p> <p>[edit protocols rip <a href="#">group group-name</a>],</p> <p>[edit protocols rip <a href="#">group group-name</a> neighbor <i>neighbor-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols rip <a href="#">group group-name</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols rip <a href="#">group group-name</a> neighbor <i>neighbor-name</i>]</p> |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.6.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Configure the route timeout interval for RIP. If a route is not refreshed after being installed in the routing table by the specified timeout interval, the route is marked as invalid and is removed from the routing table after the hold-down period expires.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <p><b>seconds</b>—Estimated time to wait before making updates to the routing table.</p> <p><b>Range:</b> 30 through 360 seconds</p> <p><b>Default:</b> 180 seconds</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring RIP Timers on page 3603</a></li> <li>• <a href="#">RIP Demand Circuits Overview</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |



## send (Protocols RIP)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>send <i>send-options</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">rip</a>],</code><br><code>[edit logical-systems <i>logical-system-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor</a></code><br><code>  <i>neighbor-name</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code><br><code>  <a href="#">rip</a>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code><br><code>  rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>],</code><br><code>[edit protocols <a href="#">rip</a>],</code><br><code>[edit protocols rip group <i>group-name</i> <a href="#">neighbor</a> <i>neighbor-name</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols rip group <i>group-name</i> <a href="#">neighbor</a></code><br><code>  <i>neighbor-name</i>]</code> |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Configure RIP send options.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <i>send-options</i> —One of the following: <ul style="list-style-type: none"><li>• <b>broadcast</b>—Broadcast RIP version 2 packets (RIP version 1 compatible).</li><li>• <b>multicast</b>—Multicast RIP version 2 packets. This is the default.</li><li>• <b>none</b>—Do not send RIP updates.</li><li>• <b>version-1</b>—Broadcast RIP version 1 packets.</li></ul> <b>Default:</b> multicast                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring the Sending and Receiving of RIPv1 and RIPv2 Packets on page 3592</a></li><li>• <a href="#">receive on page 3631</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |



## traceoptions (Protocols RIP)

|                            |                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>traceoptions {     file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i> &lt;<i>flag-modifier</i>&gt; &lt;disable&gt;; }</pre>                                                                                                                                |
| <b>Hierarchy Level</b>     | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">rip</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a> ],<br>[edit protocols <a href="#">rip</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a> ] |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                          |
| <b>Description</b>         | Set RIP protocol-level tracing options.                                                                                                                                                                                                                                                                                                                 |



**NOTE:** The `traceoptions` statement is not supported on QFabric systems.

**Default** The default RIP protocol-level trace options are inherited from the global `traceoptions` statement.

**Options** **disable**—(Optional) Disable the tracing operation. One use of this option is to disable a single operation when you have defined a broad group of tracing operations, such as **all**.

**file *filename***—Name of the file to receive the output of the tracing operation. Enclose the name in quotation marks. We recommend that you place RIP tracing output in the file `/var/log/rip-log`.

**files *number***—(Optional) Maximum number of trace files. When a trace file named ***trace-file*** reaches its maximum size, it is renamed ***trace-file.0***, then ***trace-file.1***, and so on, until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. If you specify a maximum number of files, you must also specify a maximum file size with the **size** option.

**Range:** 2 through 1000 files

**Default:** 10 files

**flag *flag***—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements.

### RIP Tracing Options

- **auth**—RIP authentication
- **error**—RIP error packets



- **expiration**—RIP route expiration processing
- **holddown**—RIP hold-down processing
- **nsr-synchronization**—Nonstop routing synchronization events
- **packets**—All RIP packets
- **request**—RIP information packets such as request, poll, and poll entry packets
- **trigger**—RIP triggered updates
- **update**—RIP update packets

#### Global Tracing Options

- **all**—All tracing operations
- **general**—A combination of the **normal** and **route** trace operations
- **normal**—All normal operations

**Default:** If you do not specify this option, only unusual or abnormal operations are traced.

- **policy**—Policy operations and actions
- **route**—Routing table changes
- **state**—State transitions
- **task**—Routing protocol task processing
- **timer**—Routing protocol timer processing

**flag-modifier**—(Optional) Modifier for the tracing flag. You can specify one or more of these modifiers:

- **detail**—Provide detailed trace information.
- **receive**—Trace the packets being received.
- **receive-detail**—Provide detailed trace information for packets being received.
- **send**—Trace the packets being transmitted.
- **send-detail**—Provide detailed trace information for packets being transmitted.

**no-world-readable**—(Optional) Prevent any user from reading the log file.



**size *size***—(Optional) Maximum size of each trace file, in kilobytes (KB) or megabytes (MB). When a trace file named ***trace-file*** reaches this size, it is renamed ***trace-file.0***. When the ***trace-file*** again reaches its maximum size, ***trace-file.0*** is renamed ***trace-file.1*** and ***trace-file*** is renamed ***trace-file.0***. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. If you specify a maximum file size, you must also specify a maximum number of trace files with the **files** option.

**Syntax:** ***xk*** to specify KB, ***xm*** to specify MB, or ***xg*** to specify GB

**Range:** 10 KB through the maximum file size supported on your system

**Default:** 128 KB

**world-readable**—(Optional) Allow any user to read the log file.

|                              |                                                                                                                        |
|------------------------------|------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege</b>    | routing—To view this statement in the configuration.                                                                   |
| <b>Level</b>                 | routing-control—To add this statement to the configuration.                                                            |
| <b>Related Documentation</b> | <ul style="list-style-type: none"> <li>• <a href="#">Example: Tracing RIP Protocol Traffic on page 3609</a></li> </ul> |



## update-interval (Protocols RIP)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>update-interval seconds;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">rip</a>],</code><br><code>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">rip</a> group <i>group-name</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">rip</a> group <i>group-name</i> neighbor</code><br><code>    <i>neighbor-name</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code><br><code>    <a href="#">rip</a>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code><br><code>    <a href="#">rip</a> group <i>group-name</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code><br><code>    <a href="#">rip</a> group <i>group-name</i> neighbor <i>neighbor-name</i>],</code><br><code>[edit protocols <a href="#">rip</a>],</code><br><code>[edit protocols <a href="#">rip</a> group <i>group-name</i>],</code><br><code>[edit protocols <a href="#">rip</a> group <i>group-name</i> neighbor <i>neighbor-name</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a> group <i>group-name</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">rip</a> group <i>group-name</i> neighbor</code><br><code>    <i>neighbor-name</i>]</code> |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.6.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | Configure the interval at which routes learned by RIP are sent to neighbors. This timer controls the interval between routing updates. This timer is set to 30 seconds, by default, with a small random amount of time added when the timer is reset. This added time prevents congestion that can happen if all routing devices update their neighbors simultaneously.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>                  | <b>seconds</b> —Estimated time to wait before making updates to the routing table.<br><b>Range:</b> 10 through 60 seconds<br><b>Default:</b> 30 seconds                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring RIP Timers on page 3603</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |



## CHAPTER 42

# Administration

- [Routine Monitoring on page 3639](#)
- [RIP Operational Commands on page 3639](#)

## Routine Monitoring

---

- [Monitoring RIP Routing Information on page 3639](#)

### Monitoring RIP Routing Information

**Purpose** Use the monitoring functionality to monitor RIP routing on routing devices.

**Action** To view RIP routing information in the CLI, enter the following CLI commands:

- **show rip statistics**
- **show rip neighbor**

## RIP Operational Commands

---



## clear rip general-statistics

---

|                                                   |                                                                                                                                                                                                         |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                     | clear rip general-statistics<br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                    |
| <b>Syntax (EX Series Switches and QFX Series)</b> | clear rip general-statistics                                                                                                                                                                            |
| <b>Release Information</b>                        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.                |
| <b>Description</b>                                | Clear RIP general statistics.                                                                                                                                                                           |
| <b>Options</b>                                    | <b>none</b> —Clear RIP general statistics.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| <b>Required Privilege Level</b>                   | clear                                                                                                                                                                                                   |
| <b>Related Documentation</b>                      | <ul style="list-style-type: none"><li>• <a href="#">show rip general-statistics on page 3642</a></li></ul>                                                                                              |
| <b>List of Sample Output</b>                      | <a href="#">clear rip general-statistics on page 3640</a>                                                                                                                                               |
| <b>Output Fields</b>                              | When you enter this command, you are provided feedback on the status of your request.                                                                                                                   |

## Sample Output

```
clear rip  
general-statistics      user@host> clear rip general-statistics
```



## clear rip statistics

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                     | clear rip statistics<br><instance (all   <i>instance-name</i> )><br><logical-system (all   <i>logical-system-name</i> )><br><neighbor><br><peer (all   <i>address</i> )>                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Syntax (EX Series Switches and QFX Series)</b> | clear rip statistics<br><instance (all   <i>instance-name</i> )><br><neighbor>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>                        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>                                | Clear RIP statistics.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                                    | <p><b>none</b>—Reset RIP counters for all neighbors for all routing instances.</p> <p><b>instance (all   <i>instance-name</i>)</b>—(Optional) Clear RIP statistics for all instances or for the specified routing instance only.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>neighbor</b>—(Optional) Clear RIP statistics for the specified neighbor only.</p> <p><b>peer (all   <i>address</i>)</b>—(Optional) Clear RIP statistics for a single peer or all peers.</p> |
| <b>Required Privilege Level</b>                   | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>                      | <ul style="list-style-type: none"> <li>• <a href="#">show rip statistics on page 3646</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>List of Sample Output</b>                      | <a href="#">clear rip statistics on page 3641</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Output Fields</b>                              | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

## Sample Output

clear rip statistics      user@host> clear rip statistics



## show rip general-statistics

|                                                   |                                                                                                                                                                                                              |
|---------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                     | show rip general-statistics<br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                          |
| <b>Syntax (EX Series Switches and QFX Series)</b> | show rip general-statistics                                                                                                                                                                                  |
| <b>Release Information</b>                        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.                     |
| <b>Description</b>                                | Display brief RIP statistics.                                                                                                                                                                                |
| <b>Options</b>                                    | <p><b>none</b>—Display brief RIP statistics.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                   | view                                                                                                                                                                                                         |
| <b>Related Documentation</b>                      | <ul style="list-style-type: none"> <li><a href="#">clear rip general-statistics on page 3640</a></li> </ul>                                                                                                  |
| <b>List of Sample Output</b>                      | <a href="#">show rip general-statistics on page 3643</a>                                                                                                                                                     |
| <b>Output Fields</b>                              | <p><a href="#">Table 235 on page 3642</a> lists the output fields for the <b>show rip general-statistics</b> command. Output fields are listed in the approximate order in which they appear.</p>            |

**Table 235: show rip general-statistics Output Fields**

| Field Name         | Field Description                                      |
|--------------------|--------------------------------------------------------|
| <b>bad msgs</b>    | Number of invalid messages received.                   |
| <b>no rcv intf</b> | Number of packets received with no matching interface. |
| <b>curr memory</b> | Amount of memory currently used by RIP.                |
| <b>max memory</b>  | Most memory used by RIP.                               |



## Sample Output

```
show rip
general-statistics

user@host> show rip general-statistics
RIPv2 I/O info:
  bad msgs      :      0
  no recv intf  :      0
  curr memory   :      0
  max memory    :      0
```



## show rip neighbor

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                     | show rip neighbor<br><instance (all   <i>instance-name</i> )><br><logical-system (all   <i>logical-system-name</i> )><br>< <i>name</i> >                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Syntax (EX Series Switches and QFX Series)</b> | show rip neighbor<br><instance (all   <i>instance-name</i> )><br>< <i>name</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>                        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>                                | Display information about RIP neighbors.                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                                    | <p><b>none</b>—Display information about all RIP neighbors for all instances.</p> <p><b>instance (all   <i>instance-name</i>)</b>—(Optional) Display RIP neighbor information for all instances or for only the specified routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b><i>name</i></b>—(Optional) Display detailed information about only the specified RIP neighbor.</p> |
| <b>Required Privilege Level</b>                   | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>List of Sample Output</b>                      | <a href="#">show rip neighbor on page 3645</a><br><a href="#">show rip neighbor (With Demand Circuits Configured) on page 3645</a>                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Output Fields</b>                              | <a href="#">Table 236 on page 3644</a> lists the output fields for the <b>show rip neighbor</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                     |

**Table 236: show rip neighbor Output Fields**

| Field Name      | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Neighbor</b> | <p>Name of the RIP neighbor.</p> <p><b>NOTE:</b> Beginning with Junos OS Release 11.1, when you configure demand circuits, the output displays a demand circuit (DC) flag next to neighbor interfaces configured for demand circuits.</p> <p>If you configure demand circuits at the <b>[edit protocols rip group <i>group-name</i> neighbor <i>neighbor-name</i>]</b> hierarchy level, the output shows only the neighboring interface that you specifically configured as a demand circuit. If you configure demand circuits at the <b>[edit protocols rip group <i>group-name</i>]</b> hierarchy level, all of the interfaces in the group are configured as demand circuits. Therefore, the output shows all of the interfaces in that group as demand circuits.</p> |



Table 236: show rip neighbor Output Fields (*continued*)

| Field Name                 | Field Description                                                                                        |
|----------------------------|----------------------------------------------------------------------------------------------------------|
| <b>State</b>               | State of the connection: <b>Up</b> or <b>Dn</b> (Down).                                                  |
| <b>Source Address</b>      | Address of the port on the local router.                                                                 |
| <b>Destination Address</b> | Address of the port on the remote router.                                                                |
| <b>Send Mode</b>           | Send options: <b>broadcast</b> , <b>multicast</b> , <b>none</b> , or <b>version 1</b> .                  |
| <b>Receive Mode</b>        | Type of packets to accept: <b>both</b> , <b>none</b> , <b>version 1</b> , or <b>version 2</b> .          |
| <b>In Met</b>              | Metric added to incoming routes when advertising into RIP routes that were learned from other protocols. |

## Sample Output

### show rip neighbor

```

user@host> show rip neighbor
Neighbor      Local State Source Address Destination Address Send Mode Receive Mode In Met
-----
ge-2/3/0.0    Up  192.168.9.105 192.168.9.107 bcast both 1
at-5/1/1.42   Dn  (null)         (null)         mcast v2 only 3
at-5/1/0.42   Dn  (null)         (null)         mcast both 3
at-5/1/0.0    Up  20.0.0.1       224.0.0.9      mcast both 3
so-0/0/0.0    Up  192.168.9.97  224.0.0.9      mcast both 3

```

### show rip neighbor (With Demand Circuits Configured)

```

user@host> show rip neighbor
Neighbor      Local State Source Address Destination Address Send Mode Receive Mode In Met
-----
so-0/1/0.0(DC) Up  10.10.10.2    224.0.0.9      mcast both 1
so-0/2/0.0(DC) Up  13.13.13.2    224.0.0.9      mcast both 1

```



## show rip statistics

---

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                     | show rip statistics<br><instance (all   <i>instance-name</i> )><br><logical-system (all   <i>logical-system-name</i> )><br><name><br><peer (all   <i>address</i> )>                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Syntax (EX Series Switches and QFX Series)</b> | show rip statistics<br><instance (all   <i>instance-name</i> )><br><name>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>                        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>                                | Display RIP statistics about messages sent and received on an interface, as well as information received from advertisements from other routing devices.                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                                    | <b>none</b> —Display RIP statistics for all routing instances.<br><br><b>instance (all   <i>instance-name</i>)</b> —(Optional) Display RIP statistics for all instances or for only the specified routing instance.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.<br><br><b>name</b> —(Optional) Display detailed information about only the specified RIP neighbor.<br><br><b>peer (all   <i>address</i>)</b> —(Optional) Display RIP statistics for a single peer or all peers. |
| <b>Required Privilege Level</b>                   | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>                      | <ul style="list-style-type: none"><li>• <a href="#">clear rip statistics on page 3641</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>List of Sample Output</b>                      | <a href="#">show rip statistics on page 3648</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Output Fields</b>                              | <a href="#">Table 237 on page 3647</a> lists the output fields for the <b>show rip statistics</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                               |



Table 237: show rip statistics Output Fields

| Field Name                      | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>RIP info</b>                 | <p>Information about RIP on the specified interface:</p> <ul style="list-style-type: none"> <li>• <b>port</b>—UDP port number used for RIP.</li> <li>• <b>update interval</b>—Interval between routing table updates, in seconds.</li> <li>• <b>holddown</b>—Hold-down interval, in seconds.</li> <li>• <b>timeout</b>—Timeout interval, in seconds.</li> <li>• <b>restart in progress</b>—Graceful restart status. Displayed when RIP is or has been in the process of graceful restart.</li> <li>• <b>restart time</b>—Estimated time for the graceful restart to finish, in seconds.</li> <li>• <b>restart will complete in</b>—Remaining time for the graceful restart to finish, in seconds.</li> <li>• <b>rts learned</b>—Number of routes learned through RIP.</li> <li>• <b>rts held down</b>—Number of routes held down by RIP.</li> <li>• <b>rqsts dropped</b>—Number of received request packets that were dropped.</li> <li>• <b>resps dropped</b>—Number of received response packets that were dropped.</li> </ul>                                                                                                                                                   |
| <b><i>logical-interface</i></b> | <p>Name of the logical interface and its statistics:</p> <ul style="list-style-type: none"> <li>• <b>routes learned</b>—Number of routes learned on the logical interface.</li> <li>• <b>routes advertised</b>—Number of routes advertised by the logical interface.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Counter</b>                  | <p>List of counter types:</p> <ul style="list-style-type: none"> <li>• <b>Updates Sent</b>—Number of update messages sent.</li> <li>• <b>Triggered Updates Sent</b>—Number of triggered update messages sent.</li> <li>• <b>Responses Sent</b>—Number of response messages sent.</li> <li>• <b>Bad Messages</b>—Number of invalid messages received.</li> <li>• <b>RIPv1 Updates Received</b>—Number of RIPv1 update messages received.</li> <li>• <b>RIPv1 Bad Route Entries</b>—Number of RIPv1 invalid route entry messages received.</li> <li>• <b>RIPv1 Updates Ignored</b>—Number of RIPv1 update messages ignored.</li> <li>• <b>RIPv2 Updates Received</b>—Number of RIPv2 update messages received.</li> <li>• <b>RIPv2 Bad Route Entries</b>—Number of RIPv2 invalid route entry messages received.</li> <li>• <b>RIPv2 Updates Ignored</b>—Number of RIPv2 update messages ignored.</li> <li>• <b>Authentication Failures</b>—Number of received update messages that failed authentication.</li> <li>• <b>RIP Requests Received</b>—Number of RIP request messages received.</li> <li>• <b>RIP Requests Ignored</b>—Number of RIP request messages ignored.</li> </ul> |
| <b>Total</b>                    | Total number of packets for the selected counter.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Last 5 min</b>               | Number of packets for the selected counter in the most recent 5-minute period.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Last minute</b>              | Number of packets for the selected counter in the most recent 1-minute period.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |



## Sample Output

### show rip statistics

```
user@host> show rip statistics so-0/0/0.0
RIP info: port 520; update interval: 30s; holddown 180s; timeout 120s
restart in progress: restart time 60s; restart will complete in 55s
  rts learned  rts held down  rqsts dropped  resps dropped
            0             0             0             0
so-0/0/0.0: 0 routes learned; 501 routes advertised
Counter      Total      Last 5 min  Last minute
-----
Updates Sent          0           0           0
Triggered Updates Sent 0           0           0
Responses Sent        0           0           0
Bad Messages          0           0           0
RIPv1 Updates Received 0           0           0
RIPv1 Bad Route Entries 0           0           0
RIPv1 Updates Ignored  0           0           0
RIPv2 Updates Received 0           0           0
RIPv2 Bad Route Entries 0           0           0
RIPv2 Updates Ignored  0           0           0
Authentication Failures 0           0           0
RIP Requests Received  0           0           0
RIP Requests Ignored   0           0           0
```



## PART 14

# Multicast

- [Overview on page 3651](#)
- [Configuration on page 3687](#)
- [Administration on page 3925](#)







## CHAPTER 43

# Overview

- [Introduction to PIM Basics on page 3651](#)
- [Introduction to PIM Sparse Mode on page 3654](#)
- [Introduction to Static RP on page 3658](#)
- [Introduction to Anycast RP on page 3658](#)
- [Introduction to PIM Bootstrap Router on page 3659](#)
- [Introduction to PIM Filtering on page 3660](#)
- [Introduction to PIM RPT and SPT Cutover on page 3662](#)
- [Introduction to IGMP on page 3671](#)
- [Introduction to IGMP Snooping on page 3674](#)
- [Introduction to MSDP on page 3678](#)
- [Introduction to Source-Specific Multicast on page 3679](#)
- [Introduction to Multicast VLAN Registration on page 3683](#)

## Introduction to PIM Basics

---

- [PIM Overview on page 3651](#)
- [PIM on Aggregated Interfaces on page 3654](#)

## PIM Overview

The predominant multicast routing protocol in use on the Internet today is Protocol Independent Multicast, or PIM. The type of PIM used on the Internet is PIM sparse mode. PIM sparse mode is so accepted that when the simple term “PIM” is used in an Internet context, some form of sparse mode operation is assumed.

PIM emerged as an algorithm to overcome the limitations of dense-mode protocols such as the Distance Vector Multicast Routing Protocol (DVMRP), which was efficient for dense clusters of multicast receivers, but did not scale well for the larger, sparser, groups encountered on the Internet. The Core Based Trees (CBT) Protocol was intended to support sparse mode as well, but CBT, with its all-powerful core approach, made placement of the core critical, and large conference-type applications (many-to-many) resulted in bottlenecks in the core. PIM was designed to avoid the dense-mode scaling issues of DVMRP and the potential performance issues of CBT at the same time.



PIM is one of the most rapidly evolving specifications on the Internet today. Since its introduction in 1995, PIM has already seen two major revisions to its packet structure (PIM version 1 [PIMv1] and PIM version 2 [PIMv2]), two major RFCs (RFC 2362 obsoleted RFC 2117), and numerous drafts describing major components of PIM, such as many-to-many trees and source-specific multicast (SSM). Long-lasting RFCs are not a feature of PIM, and virtually all of PIM must be researched, understood, and implemented directly from Internet drafts. In fact, no current RFC describes PIMv1 at all. The drafts have all expired, and PIMv1 was never issued as an official RFC.

PIM itself is not nonstandard or unstable, however. PIM has been a promising multicast routing protocol since its inception, especially PIM sparse mode, the first real sparse-mode multicast routing protocol. Work continues on PIM in a number of areas, from bidirectional trees to network management, and the rapid pace of development makes drafts essential for PIM.

PIMv1 and PIMv2 can coexist on the same router and even on the same interface. The main difference between PIMv1 and PIMv2 is the packet format. PIMv1 messages use Internet Group Management Protocol (IGMP) packets, whereas PIMv2 has its own IP protocol number (103) and packet structure. All routers connecting to an IP subnet such as a LAN must use the same PIM version. Some PIM implementations can recognize PIMv1 packets and automatically switch the router interface to PIMv1. Because the difference between PIMv1 and PIMv2 involves the message format, but not the meaning of the message or how the router processes the PIM message, a router can easily mix PIMv1 and PIMv2 interfaces.

PIM is used for efficient routing to multicast groups that might span wide-area and interdomain internetworks. It is called “protocol independent” because it does not depend on a particular unicast routing protocol. Junos OS supports bidirectional mode, sparse mode, dense mode, and sparse-dense mode.

PIM operates in several modes: bidirectional mode, sparse mode, dense mode, and sparse-dense mode. In sparse-dense mode, some multicast groups are configured as dense mode (flood-and-prune, [S,G] state) and others are configured as sparse mode (explicit join to rendezvous point [RP], [\*G] state).

PIM drafts also establish a mode known as PIM source-specific mode, or PIM SSM. In PIM SSM there is only one specific source for the content of a multicast group within a given domain.



Because the PIM mode you choose determines the PIM configuration properties, you first must decide whether PIM operates in bidirectional, sparse, dense, or sparse-dense mode in your network. Each mode has distinct operating advantages in different network environments.

- In sparse mode, routers must join and leave multicast groups explicitly. Upstream routers do not forward multicast traffic to a downstream router unless the downstream router has sent an explicit request (by means of a join message) to the rendezvous point (RP) router to receive this traffic. The RP serves as the root of the shared multicast delivery tree and is responsible for forwarding multicast data from different sources to the receivers.

Sparse mode is well suited to the Internet, where frequent interdomain join messages and prune messages are common.

- Bidirectional PIM is similar to sparse mode, and is especially suited to applications that must scale to support a large number of dispersed sources and receivers. In bidirectional PIM, routers build shared bidirectional trees and do not switch to a source-based tree. Bidirectional PIM scales well because it needs no source-specific (S,G) state. Instead, it builds only group-specific (\*G) state.
- Unlike sparse mode and bidirectional mode, in which data is forwarded only to routers sending an explicit PIM join request, dense mode implements a *flood-and-prune* mechanism, similar to the Distance Vector Multicast Routing Protocol (DVMRP). In dense mode, a router receives the multicast data on the incoming interface, then forwards the traffic to the outgoing interface list. Flooding occurs periodically and is used to refresh state information, such as the source IP address and multicast group pair. If the router has no interested receivers for the data, and the outgoing interface list becomes empty, the router sends a PIM prune message upstream.

Dense mode works best in networks where few or no prunes occur. In such instances, dense mode is actually more efficient than sparse mode.

- Sparse-dense mode, as the name implies, allows the interface to operate on a per-group basis in either sparse or dense mode. A group specified as “dense” is not mapped to an RP. Instead, data packets destined for that group are forwarded by means of PIM dense mode rules. A group specified as “sparse” is mapped to an RP, and data packets are forwarded by means of PIM sparse-mode rules. Sparse-dense mode is useful in networks implementing auto-RP for PIM sparse mode.

### Basic PIM Network Components

PIM dense mode requires only a multicast source and series of multicast-enabled routers running PIM dense mode to allow receivers to obtain multicast content. Dense mode makes sure that all multicast traffic gets everywhere by periodically flooding the network with multicast traffic, and relies on prune messages to make sure that subnets where all receivers are uninterested in that particular multicast group stop receiving packets.

PIM sparse mode is more complicated and requires the establishment of special routers called *rendezvous points (RPs)* in the network core. These routers are where upstream join messages from interested receivers meet downstream traffic from the source of the



multicast group content. A network can have many RPs, but PIM sparse mode allows only one RP to be active for any multicast group.

If there is only one RP in a routing domain, the RP and adjacent links might become congested and form a single point of failure for all multicast traffic. Thus, multiple RPs are the rule, but the issue then becomes how other multicast routers find the RP that is the source of the multicast group the receiver is trying to join. This RP-to-group mapping is controlled by a special *bootstrap router (BSR)* running the PIM BSR mechanism. There can be more than one bootstrap router as well, also for single-point-of-failure reasons.

The bootstrap router does not have to be an RP itself, although this is a common implementation. The bootstrap router's main function is to manage the collection of RPs and allow interested receivers to find the source of their group's multicast traffic. PIM bootstrap messages are sourced from the loopback address, which is always up. The loopback address must be routable. If it is not routable, then the bootstrap router is unable to send bootstrap messages to update the RP domain members. The **show pim bootstrap** command displays only those bootstrap routers that have routable loopback addresses.

PIM SSM can be seen as a subset of a special case of PIM sparse mode and requires no specialized equipment other than that used for PIM sparse mode (and IGMP version 3).

Bidirectional PIM RPs, unlike RPs for PIM sparse mode, do not need to perform PIM Register tunneling or other specific protocol action. Bidirectional PIM RPs implement no specific functionality. RP addresses are simply a location in the network to rendezvous toward. In fact, for bidirectional PIM, RP addresses need not be loopback interface addresses or even be addresses configured on any router, as long as they are covered by a subnet that is connected to a bidirectional PIM-capable router and advertised to the network.

**Related Documentation**

- Supported IP Multicast Protocol Standards in the Multicast Protocols Configuration Guide

## PIM on Aggregated Interfaces

If you configure PIM on an aggregated (**ae-** or **as-**) interface, each of the interfaces in the aggregate is included in the multicast output interface list and carries the single stream of replicated packets in a load-sharing fashion. The multicast aggregate interface is “expanded” into its constituent interfaces in the next-hop database.

**Related Documentation**

---

## Introduction to PIM Sparse Mode

- [Understanding PIM Sparse Mode on page 3655](#)
- [Designated Router on page 3657](#)



## Understanding PIM Sparse Mode

A Protocol Independent Multicast (PIM) sparse-mode domain uses reverse-path forwarding (RPF) to create a path from a data source to the receiver requesting the data. When a receiver issues an explicit join request, an RPF check is triggered. A (\*,G) PIM join message is sent toward the RP from the receiver's designated router (DR). (By definition, this message is actually called a join/prune message, but for clarity in this description, it is called either join or prune, depending on its context.) The join message is multicast hop by hop upstream to the ALL-PIM-ROUTERS group (224.0.0.13) by means of each router's RPF interface until it reaches the RP. The RP router receives the (\*,G) PIM join message and adds the interface on which it was received to the outgoing interface list (OIL) of the rendezvous-point tree (RPT) forwarding state entry. This builds the RPT connecting the receiver with the RP. The RPT remains in effect, even if no active sources generate traffic.



**NOTE:** State—the (\*,G) or (S,G) entries—is the information used for forwarding unicast or multicast packets. S is the source IP address, G is the multicast group address, and \* represents any source sending to group G. Routers keep track of the multicast forwarding state for the incoming and outgoing interfaces for each group.

When a source becomes active, the source DR encapsulates multicast data packets into a PIM register message and sends them by means of unicast to the RP router.

If the RP router has interested receivers in the PIM sparse-mode domain, it sends a PIM join message toward the source to build a shortest-path tree (SPT) back to the source. The source sends multicast packets out on the LAN, and the source DR encapsulates the packets in a PIM register message and forwards the message toward the RP router by means of unicast. The RP router receives PIM register messages back from the source, and thus adds a new source to the distribution tree, keeping track of sources in a PIM table. Once an RP router receives packets natively (with S,G), it sends a register stop message to stop receiving the register messages by means of unicast.

In actual application, many receivers with multiple SPTs are involved in a multicast traffic flow. To illustrate the process, we track the multicast traffic from the RP router to one receiver. In such a case, the RP router begins sending multicast packets down the RPT toward the receiver's DR for delivery to the interested receivers. When the receiver's DR receives the first packet from the RPT, the DR sends a PIM join message toward the source DR to start building an SPT back to the source. When the source DR receives the PIM join message from the receiver's DR, it starts sending traffic down all SPTs. When the first multicast packet is received by the receiver's DR, the receiver's DR sends a PIM prune message to the RP router to stop duplicate packets from being sent through the RPT. In turn, the RP router stops sending multicast packets to the receiver's DR, and sends a PIM prune message for this source over the RPT toward the source DR to halt multicast packet delivery to the RP router from that particular source.

If the RP router receives a PIM register message from an active source but has no interested receivers in the PIM sparse-mode domain, it still adds the active source into



the PIM table. However, after adding the active source into the PIM table, the RP router sends a register stop message. The RP router discovers the active source's existence and no longer needs to receive advertisement of the source (which utilizes resources).



**NOTE:** If the number of PIM join messages exceeds the configured MTU, the messages are fragmented in IPv6 PIM sparse mode. To avoid the fragmentation of PIM join messages, the multicast traffic receives the interface MTU instead of the path MTU.

The major characteristics of PIM sparse mode are as follows:

- Routers with downstream receivers join a PIM sparse-mode tree through an explicit join message.
- PIM sparse-mode RPs are the routers where receivers meet sources.
- Senders announce their existence to one or more RPs, and receivers query RPs to find multicast sessions.
- Once receivers get content from sources through the RP, the last-hop router (the router closest to the receiver) can optionally remove the RP from the shared distribution tree (\*G) if the new source-based tree (S,G) is shorter. Receivers can then get content directly from the source.

The transitional aspect of PIM sparse mode from shared to source-based tree is one of the major features of PIM, because it prevents overloading the RP or surrounding core links.

There are related issues regarding source, RPs, and receivers when sparse mode multicast is used:

- Sources must be able to send to all RPs.
- RPs must all know one another.
- Receivers must send explicit join messages to a known RP.
- Receivers initially need to know only one RP (they later learn about others).
- Receivers can explicitly prune themselves from a tree.
- Receivers that never transition to a source-based tree are effectively running Core Based Trees (CBT).

PIM sparse mode has standard features for all of these issues.

---


### Rendezvous Point

The RP router serves as the information exchange point for the other routers. All routers in a PIM domain must provide mapping to an RP router. It is the only router that needs to know the active sources for a domain—the other routers just need to know how to reach the RP. In this way, the RP matches receivers with sources.



The RP router is downstream from the source and forms one end of the shortest-path tree. As shown in [Figure 122 on page 3657](#), the RP router is upstream from the receiver and thus forms one end of the rendezvous-point tree.

**Figure 122: Rendezvous Point as Part of the RPT and SPT**

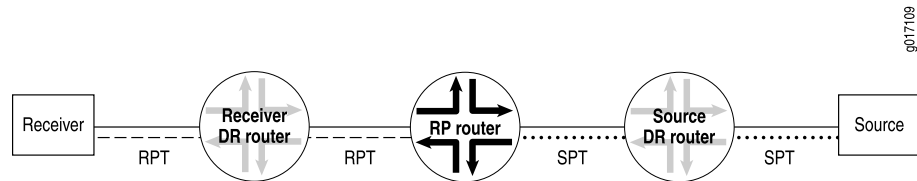

The benefit of using the RP as the information exchange point is that it reduces the amount of state in non-RP routers. No network flooding is required to provide non-RP routers information about active sources.

### RP Mapping Options

RPs can be learned by one of the following mechanisms:

- Static configuration
- Anycast RP
- Auto-RP
- Bootstrap router

We recommend a static RP mapping with anycast RP and a bootstrap router (BSR) with auto-RP configuration, because static mapping provides all the benefits of a bootstrap router and auto-RP without the complexity of the full BSR and auto-RP mechanisms.

#### Related Documentation

- [Understanding Static RP on page 3658](#)
- [Understanding RP Mapping with Anycast RP on page 3659](#)
- [Understanding the PIM Bootstrap Router on page 3659](#)
- [Understanding PIM Auto-RP](#)

### Designated Router

In a PIM sparse mode (PIM-SM) domain, there are two types of designated routers to consider:

- The receiver DR sends PIM join and PIM prune messages from the receiver network toward the RP.
- The source DR sends PIM register messages from the source network to the RP.

Neighboring PIM routers multicast periodic PIM hello messages to each other every 30 seconds (the default). The PIM hello message usually includes a holdtime value for the neighbor to use, but this is not a requirement. If the PIM hello message does not include a holdtime value, a default timeout value (in Junos OS, 105 seconds) is used. On



receipt of a PIM hello message, a router stores the IP address and priority for that neighbor. If the DR priorities match, the router with the highest IP address is selected as the DR.

If a DR fails, a new one is selected using the same process of comparing IP addresses.



**NOTE:** In PIM dense mode (PIM-DM), a DR is elected by the same process that PIM-SM uses. However, the only time that a DR has any effect in PIM-DM is when IGMPv1 is used on the interface. (IGMPv2 is the default.) In this case, the DR also functions as the IGMP Query Router because IGMPv1 does not have a Query Router election mechanism.

---

## Introduction to Static RP

- [Understanding Static RP on page 3658](#)

### Understanding Static RP

Protocol Independent Multicast (PIM) sparse mode is the most common multicast protocol used on the Internet. PIM sparse mode is the default mode whenever PIM is configured on any interface of the device. However, because PIM must not be configured on the network management interface, you must disable it on that interface.

Each any-source multicast (ASM) group has a shared tree through which receivers learn about new multicast sources and new receivers learn about all multicast sources. The rendezvous point (RP) router is the root of this shared tree and receives the multicast traffic from the source. To receive multicast traffic from the groups served by the RP, the device must determine the IP address of the RP for the source.

You can configure a static rendezvous point (RP) configuration that is similar to static routes. A static configuration has the benefit of operating in PIM version 1 or version 2. When you configure the static RP, the RP address that you select for a particular group must be consistent across all routers in a multicast domain.

One common way for the device to locate RPs is by static configuration of the IP address of the RP. A static configuration is simple and convenient. However, if the statically defined RP router becomes unreachable, there is no automatic failover to another RP router. To remedy this problem, you can use anycast RP.

#### Related Documentation

- [Configuring Local PIM RPs on page 3705](#)
- [Configuring the Static PIM RP Address on the Non-RP Routing Device on page 3707](#)

---

## Introduction to Anycast RP

- [Understanding RP Mapping with Anycast RP on page 3659](#)



## Understanding RP Mapping with Anycast RP

Having a single active rendezvous point (RP) per multicast group is much the same as having a single server providing any service. All traffic converges on this single point, although other servers are sitting idle, and convergence is slow when the resource fails. In multicast specifically, there might be closer RPs on the shared tree, so the use of a single RP is suboptimal.

For the purposes of load balancing and redundancy, you can configure anycast RP. You can use anycast RP within a domain to provide redundancy and RP load sharing. When an RP fails, sources and receivers are taken to a new RP by means of unicast routing. When you configure anycast RP, you bypass the restriction of having one active RP per multicast group, and instead deploy multiple RPs for the same group range. The RP routers share one unicast IP address. Sources from one RP are known to other RPs that use the Multicast Source Discovery Protocol (MSDP). Sources and receivers use the closest RP, as determined by the interior gateway protocol (IGP).

Anycast means that multiple RP routers share the same unicast IP address. Anycast addresses are advertised by the routing protocols. Packets sent to the anycast address are sent to the nearest RP with this address. Anycast addressing is a generic concept and is used in PIM sparse mode to add load balancing and service reliability to RPs.

Anycast RP is defined in Internet draft draft-ietf-mboned-anycast-rp-08.txt, *Anycast RP Mechanism Using PIM and MSDP*. To access Internet RFCs and drafts, go to the IETF website at <http://www.ietf.org>.

### Related Documentation

- [Configuring the Static PIM RP Address on the Non-RP Routing Device on page 3707](#)
- [Example: Configuring Multiple RPs in a Domain with Anycast RP on page 3714](#)
- [Example: Configuring PIM Anycast With or Without MSDP on page 3708](#)

## Introduction to PIM Bootstrap Router

- [Understanding the PIM Bootstrap Router on page 3659](#)

## Understanding the PIM Bootstrap Router

To determine which router is the rendezvous point (RP), all routers within a PIM sparse-mode domain collect bootstrap messages. A PIM sparse-mode domain is a group of routers that all share the same RP router. The domain bootstrap router initiates bootstrap messages, which are sent hop by hop within the domain. The routers use bootstrap messages to distribute RP information dynamically and to elect a bootstrap router when necessary.

### Related Documentation

- [Configuring PIM Bootstrap Properties for IPv4 or IPv6](#)



## Introduction to PIM Filtering

---

- [Understanding Multicast Message Filters on page 3660](#)
- [Filtering MAC Addresses on page 3661](#)
- [Filtering RP and DR Register Messages on page 3661](#)

### Understanding Multicast Message Filters

Multicast sources and routers generate a considerable number of control messages, especially when using PIM sparse mode. These messages form distribution trees, locate rendezvous points (RPs) and designated routers (DRs), and transition from one type of tree to another. In most cases, this multicast messaging system operates transparently and efficiently. However, in some configurations, more control over the sending and receiving of multicast control messages is necessary.

You can configure multicast filtering to control the sending and receiving of multicast control messages.

To prevent unauthorized groups and sources from registering with an RP router, you can define a routing policy to reject PIM register messages from specific groups and sources and configure the policy on the designated router or the RP router.

- If you configure the reject policy on an RP router, it rejects incoming PIM register messages from the specified groups and sources. The RP router also sends a register stop message by means of unicast to the designated router. On receiving the register stop message, the designated router sends periodic null register messages for the specified groups and sources to the RP router.
- If you configure the reject policy on a designated router, it stops sending PIM register messages for the specified groups and sources to the RP router.



.....  
**NOTE:** If you have configured the reject policy on an RP router, we recommend that you configure the same policy on all the RP routers in your multicast network.  
.....



.....  
**NOTE:** If you delete a group and source address from the reject policy configured on an RP router and commit the configuration, the RP router will register the group and source only when the designated router sends a null register message.  
.....

#### Related Documentation

- [Filtering MAC Addresses on page 3661](#)
- [Filtering RP and DR Register Messages on page 3661](#)
- [Filtering MSDP SA Messages on page 3679](#)



## Filtering MAC Addresses

When a router is exclusively configured with multicast protocols on an interface, multicast sets the interface media access control (MAC) filter to multicast promiscuous mode, and the number of multicast groups is unlimited. However, when the router is not exclusively used for multicasting and other protocols such as OSPF, Routing Information Protocol version 2 (RIPv2), or Network Time Protocol (NTP) are configured on an interface, each of these protocols individually requests that the interface program the MAC filter to pick up its respective multicast group only. In this case, without multicast configured on the interface, the maximum number of multicast MAC filters is limited to 20. For example, the maximum number of interface MAC filters for protocols such as OSPF (multicast group 224.0.0.5) is 20, unless a multicast protocol is also configured on the interface.

No configuration is necessary for MAC filters.

## Filtering RP and DR Register Messages

You can filter Protocol Independent Multicast (PIM) register messages sent from the designated router (DR) or to the rendezvous point (RP). The PIM RP keeps track of all active sources in a single PIM sparse mode domain. In some cases, more control over which sources an RP discovers, or which sources a DR notifies other RPs about, is desired. A high degree of control over PIM register messages is provided by RP and DR register message filtering. Message filtering also prevents unauthorized groups and sources from registering with an RP router.

Register messages that are filtered at a DR are not sent to the RP, but the sources are available to local users. Register messages that are filtered at an RP arrive from source DRs, but are ignored by the router. Sources on multicast group traffic can be limited or directed by using RP or DR register message filtering alone or together.

If the action of the register filter policy is to discard the register message, the router needs to send a register-stop message to the DR. Register-stop messages are throttled to prevent malicious users from triggering them on purpose to disrupt the routing process.

Multicast group and source information is encapsulated inside unicast IP packets. This feature allows the router to inspect the multicast group and source information before sending or accepting the PIM register message.

Incoming register messages to an RP are passed through the configured register message filtering policy before any further processing. If the register message is rejected, the RP router sends a register-stop message to the DR. When the DR receives the register-stop message, the DR stops sending register messages for the filtered groups and sources to the RP. Two fields are used for register message filtering:

- Group multicast address
- Source address

The syntax of the existing policy statements is used to configure the filtering on these two fields. The **route-filter** statement is useful for multicast group address filtering, and



the **source-address-filter** statement is useful for source address filtering. In most cases, the action is to **reject** the register messages, but more complex filtering policies are possible.

Filtering cannot be performed on other header fields, such as DR address, protocol, or port. In some configurations, an RP might not send register-stop messages when the policy action is to discard the register messages. This has no effect on the operation of the feature, but the router will continue to receive register messages.

When anycast RP is configured, register messages can be sent or received by the RP. All the RPs in the anycast RP set need to be configured with the same RP register message filtering policies. Otherwise, it might be possible to circumvent the filtering policy.

**Related  
Documentation**

- [Understanding RP Mapping with Anycast RP on page 3659](#)
- [Configuring Register Message Filters on a PIM RP and DR on page 3723](#)

---

## Introduction to PIM RPT and SPT Cutover

- [Understanding Multicast Rendezvous Points, Shared Trees, and Rendezvous-Point Trees on page 3662](#)
- [Building an RPT Between the RP and Receivers on page 3663](#)
- [PIM Sparse Mode Source Registration on page 3664](#)
- [Multicast Shortest-Path Tree on page 3667](#)
- [SPT Cutover on page 3668](#)
- [SPT Cutover Control on page 3671](#)

## Understanding Multicast Rendezvous Points, Shared Trees, and Rendezvous-Point Trees

In a shared tree, the root of the distribution tree is a router, not a host, and is located somewhere in the core of the network. In the primary sparse mode multicast routing protocol, Protocol Independent Multicast sparse mode (PIM SM), the core router at the root of the shared tree is the rendezvous point (RP). Packets from the upstream source and join messages from the downstream routers “rendezvous” at this core router.

In the RP model, other routers do not need to know the addresses of the sources for every multicast group. All they need to know is the IP address of the RP router. The RP router discovers the sources for all multicast groups.

The RP model shifts the burden of finding sources of multicast content from each router (the (S,G) notation) to the network (the (\*,G) notation knows only the RP). Exactly how the RP finds the unicast IP address of the source varies, but there must be some method to determine the proper source for multicast content for a particular group.

Consider a set of multicast routers without any active multicast traffic for a certain group. When a router learns that an interested receiver for that group is on one of its directly connected subnets, the router attempts to join the distribution tree for that group back to the RP, not to the actual source of the content.



To join the shared tree, or *rendezvous-point tree (RPT)* as it is called in PIM sparse mode, the router must do the following:

- Determine the IP address of the RP for that group. Determining the address can be as simple as static configuration in the router, or as complex as a set of nested protocols.
- Build the shared tree for that group. The router executes an RPF check on the RP address in its routing table, which produces the interface closest to the RP. The router now detects that multicast packets from this RP for this group need to flow into the router on this RPF interface.
- Send a join message out on this interface using the proper multicast protocol (probably PIM sparse mode) to inform the upstream router that it wants to join the shared tree for that group. This message is a (\*G) join message because S is not known. Only the RP is known, and the RP is not actually the source of the multicast packets. The router receiving the (\*G) join message adds the interface on which the message was received to its outgoing interface list (OIL) for the group and also performs an RPF check on the RP address. The upstream router then sends a (\*G) join message out from the RPF interface toward the source, informing the upstream router that it also wants to join the group.

Each upstream router repeats this process, propagating join messages from the RPF interface, building the shared tree as it goes. The process stops when the join message reaches one of the following:

- The RP for the group that is being joined
- A router along the RPT that already has a multicast forwarding state for the group that is being joined

In either case, the branch is created, and packets can flow from the source to the RP and from the RP to the receiver. Note that there is no guarantee that the shared tree (RPT) is the shortest path tree to the source. Most likely it is not. However, there are ways to “migrate” a shared tree to an SPT once the flow of packets begins. In other words, the forwarding state can transition from (\*G) to (S,G). The formation of both types of tree depends heavily on the operation of the RPF check and the RPF table.

#### Related Documentation

- Understanding Multicast Reverse Path Forwarding

### Building an RPT Between the RP and Receivers


The RPT is the path between the RP and receivers (hosts) in a multicast group (see [Figure 123 on page 3664](#)). The RPT is built by means of a PIM join message from a receiver's DR:

1. A receiver sends a request to join group (G) in an Internet Group Management Protocol (IGMP) host membership report. A PIM sparse-mode router, the receiver's DR, receives the report on a directly attached subnet and creates an RPT branch for the multicast group of interest.
2. The receiver's DR sends a PIM join message to its RPF neighbor, the next-hop address in the RPF table, or the unicast routing table.



3. The PIM join message travels up the tree and is multicast to the ALL-PIM-ROUTERS group (224.0.0.13). Each router in the tree finds its RPF neighbor by using either the RPF table or the unicast routing table. This is done until the message reaches the RP and forms the RPT. Routers along the path set up the multicast forwarding state to forward requested multicast traffic back down the RPT to the receiver.

**Figure 123: Building an RPT Between the RP and the Receiver**

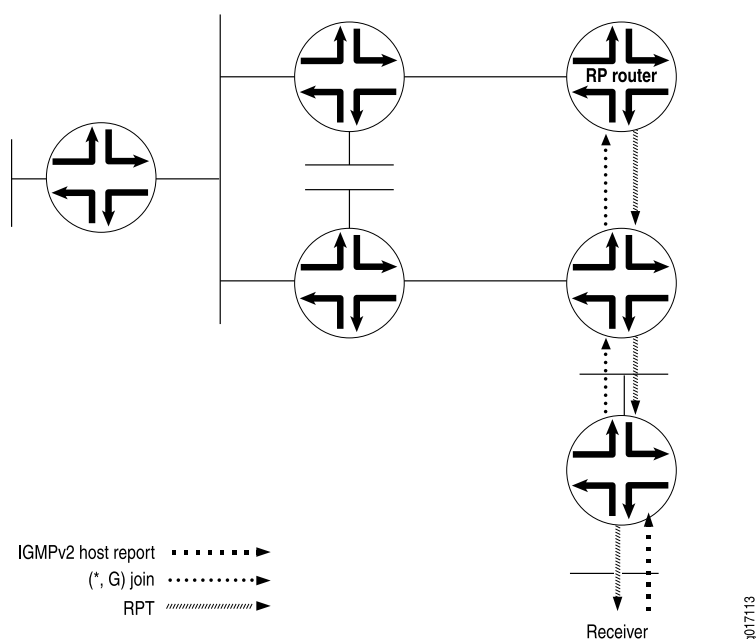

## PIM Sparse Mode Source Registration


The RPT is a unidirectional tree, permitting traffic to flow down from the RP to the receiver in one direction. For multicast traffic to reach the receiver from the source, another branch of the distribution tree, called the shortest-path tree, needs to be built from the source's DR to the RP.

The shortest-path tree is created in the following way:

1. The source becomes active, sending out multicast packets on the LAN to which it is attached. The source's DR receives the packets and encapsulates them in a PIM register message, which it sends to the RP router (see [Figure 124 on page 3665](#)).
2. When the RP router receives the PIM register message from the source, it sends a PIM join message back to the source.




Figure 124: PIM Register Message and PIM Join Message Exchanged

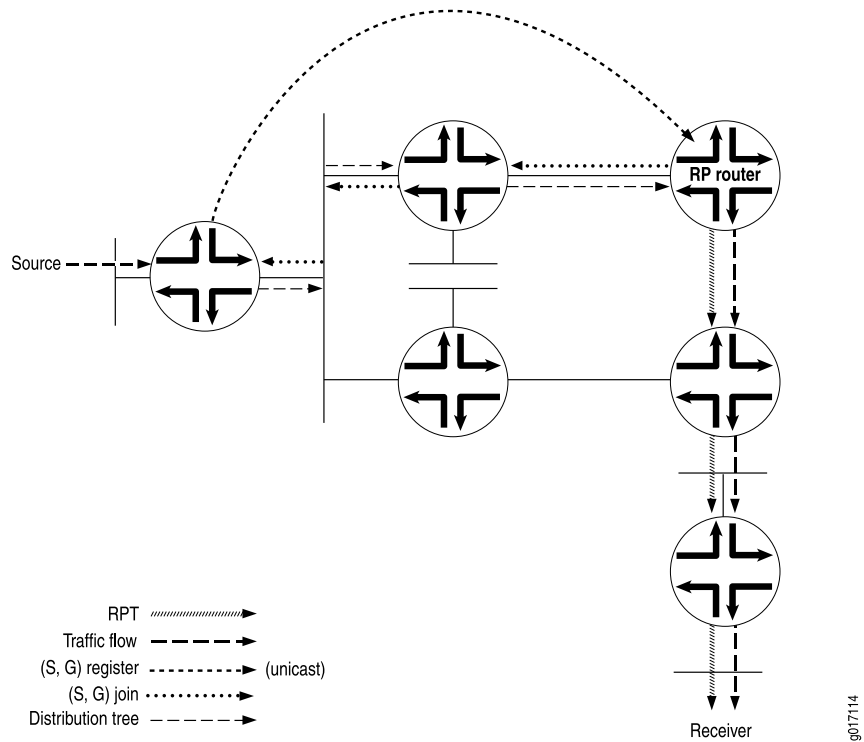

3. The source's DR receives the PIM join message and begins sending traffic down the SPT toward the RP router (see [Figure 125 on page 3666](#)).
4. Once traffic is received by the RP router, it sends a register stop message to the source's DR to stop the register process.




Figure 125: Traffic Sent from the Source to the RP Router

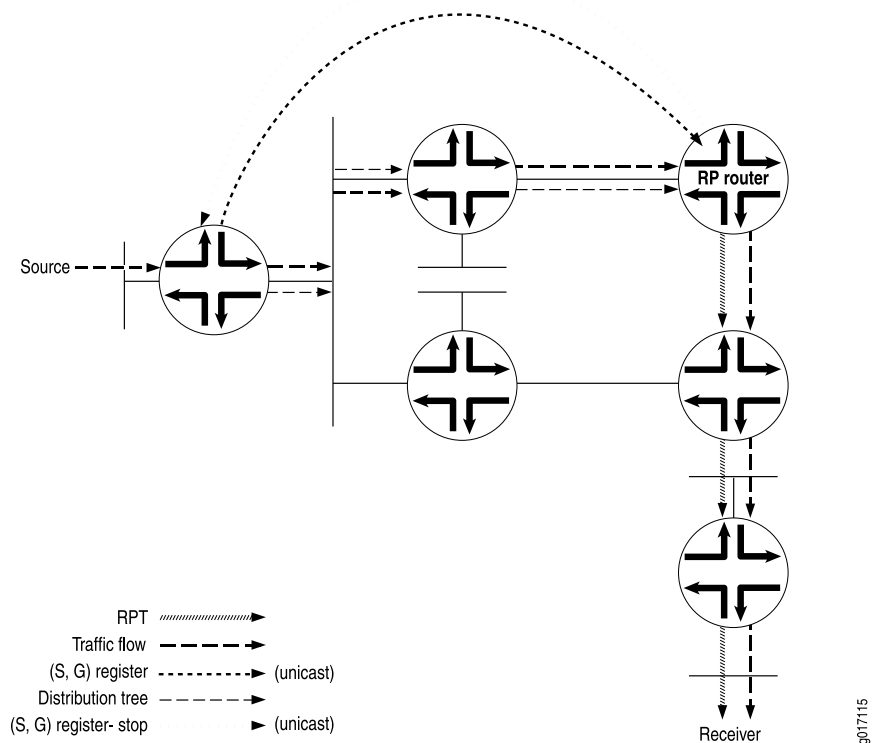

5. The RP router sends the multicast traffic down the RPT toward the receiver (see [Figure 126 on page 3666](#)).

Figure 126: Traffic Sent from the RP Router Toward the Receiver

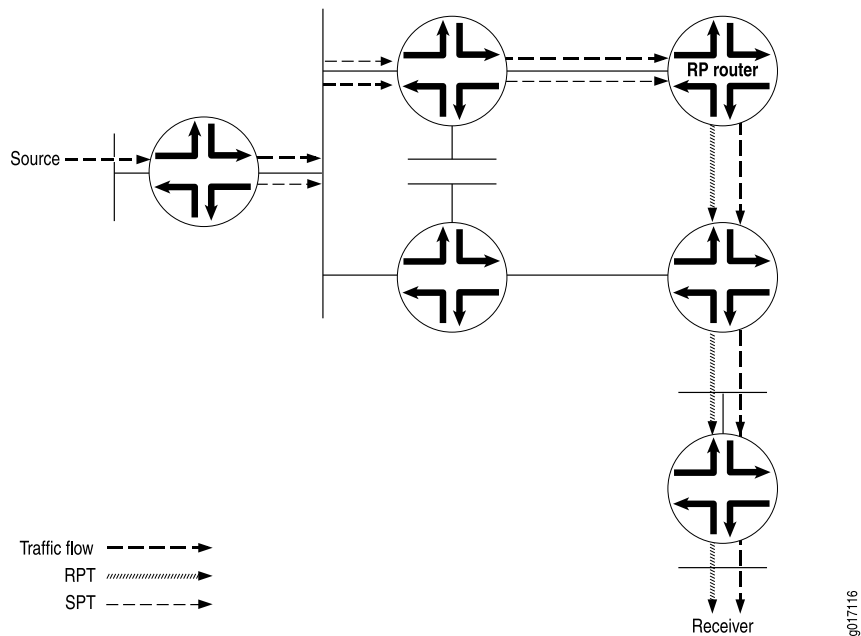



## Multicast Shortest-Path Tree

The distribution tree used for multicast is rooted at the source and is the shortest-path tree (SPT) as well. Consider a set of multicast routers without any active multicast traffic for a certain group (that is, they have no multicast forwarding state for that group). When a router learns that an interested receiver for that group is on one of its directly connected subnets, the router attempts to join the tree for that group.

To join the distribution tree, the router determines the unicast IP address of the source for that group. This address can be a simple static configuration on the router, or as complex as a set of protocols.

To build the SPT for that group, the router executes an a reverse path forwarding (RPF) check on the source address in its routing table. The RPF check produces the interface closest to the source, which is where multicast packets from this source for this group need to flow into the router.

The router next sends a join message out on this interface using the proper multicast protocol to inform the upstream router that it wants to join the distribution tree for that group. This message is an (S,G) join message because both S and G are known. The router receiving the (S,G) join message adds the interface on which the message was received to its output interface list (OIL) for the group and also performs an RPF check on the source address. The upstream router then sends an (S,G) join message out on the RPF interface toward the source, informing the upstream router that it also wants to join the group.

Each upstream router repeats this process, propagating joins out on the RPF interface, building the SPT as it goes. The process stops when the join message does one of two things:

- Reaches the router directly connected to the host that is the source.
- Reaches a router that already has multicast forwarding state for this source-group pair.

In either case, the branch is created, each of the routers has multicast forwarding state for the source-group pair, and packets can flow down the distribution tree from source to receiver. The RPF check at each router makes sure that the tree is an SPT.

SPTs are always the shortest path, but they are not necessarily short. That is, sources and receivers tend to be on the periphery of a router network, not on the backbone, and multicast distribution trees have a tendency to sprawl across almost every router in the network. Because multicast traffic can overwhelm a slow interface, and one packet can easily become a hundred or a thousand on the opposite side of the backbone, it makes sense to provide a shared tree as a distribution tree so that the multicast source can be located more centrally in the network, on the backbone. This sharing of distribution trees with roots in the core network is accomplished by a multicast rendezvous point.

### Related Documentation

- [Understanding Multicast Rendezvous Points, Shared Trees, and Rendezvous-Point Trees on page 3662](#)




## SPT Cutover

Instead of continuing to use the SPT to the RP and the RPT toward the receiver, a direct SPT is created between the source and the receiver in the following way:

1. Once the receiver's DR receives the first multicast packet from the source, the DR sends a PIM join message to its RPF neighbor (see [Figure 127 on page 3668](#)).
2. The source's DR receives the PIM join message, and an additional (S,G) state is created to form the SPT.
3. Multicast packets from that particular source begin coming from the source's DR and flowing down the new SPT to the receiver's DR. The receiver's DR is now receiving two copies of each multicast packet sent by the source—one from the RPT and one from the new SPT.


### Figure 127: Receiver DR Sends a PIM Join Message to the Source

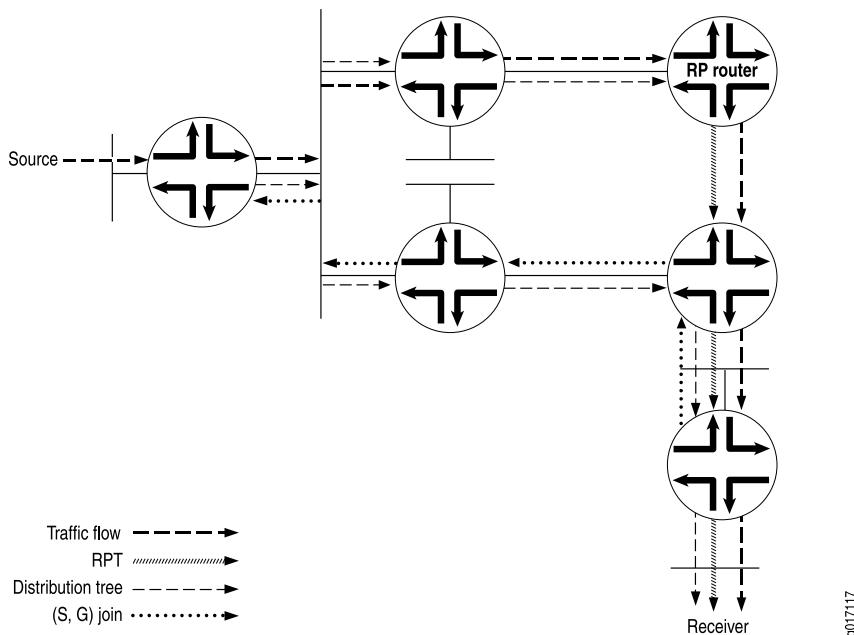

4. To stop duplicate multicast packets, the receiver's DR sends a PIM prune message toward the RP router, letting it know that the multicast packets from this particular source coming in from the RPT are no longer needed (see [Figure 128 on page 3669](#)).




Figure 128: PIM Prune Message Is Sent from the Receiver's DR Toward the RP Router

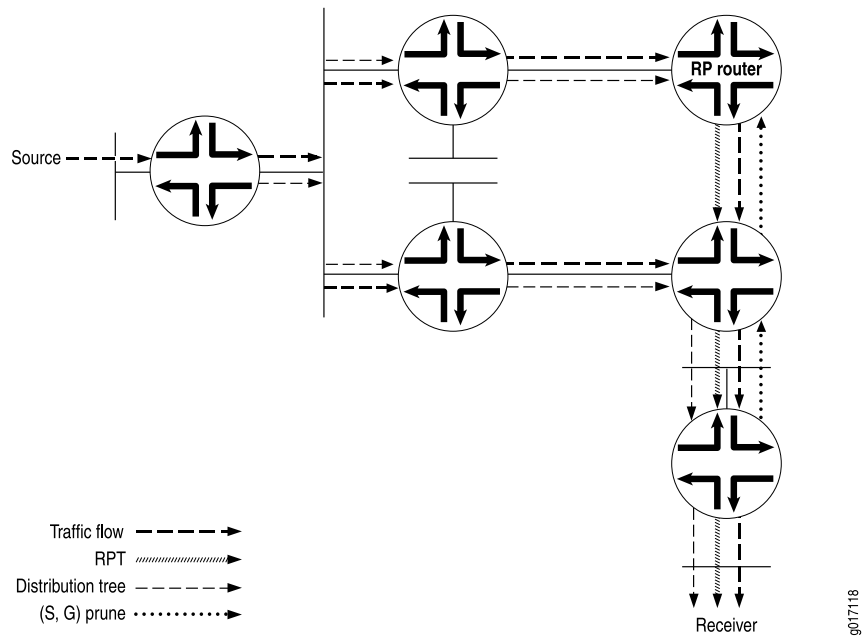

5. The PIM prune message is received by the RP router, and it stops sending multicast packets down to the receiver's DR. The receiver's DR is getting multicast packets only for this particular source over the new SPT. However, multicast packets from the source are still arriving from the source's DR toward the RP router (see [Figure 129 on page 3669](#)).


Figure 129: RP Router Receives PIM Prune Message

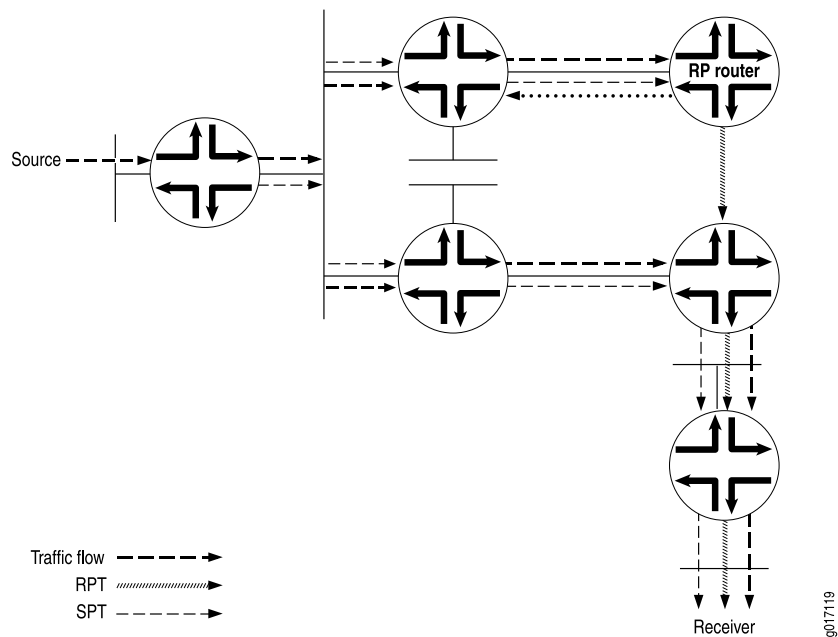




6. To stop the unneeded multicast packets from this particular source, the RP router sends a PIM prune message to the source's DR (see [Figure 130 on page 3670](#)).

**Figure 130: RP Router Sends a PIM Prune Message to the Source DR**

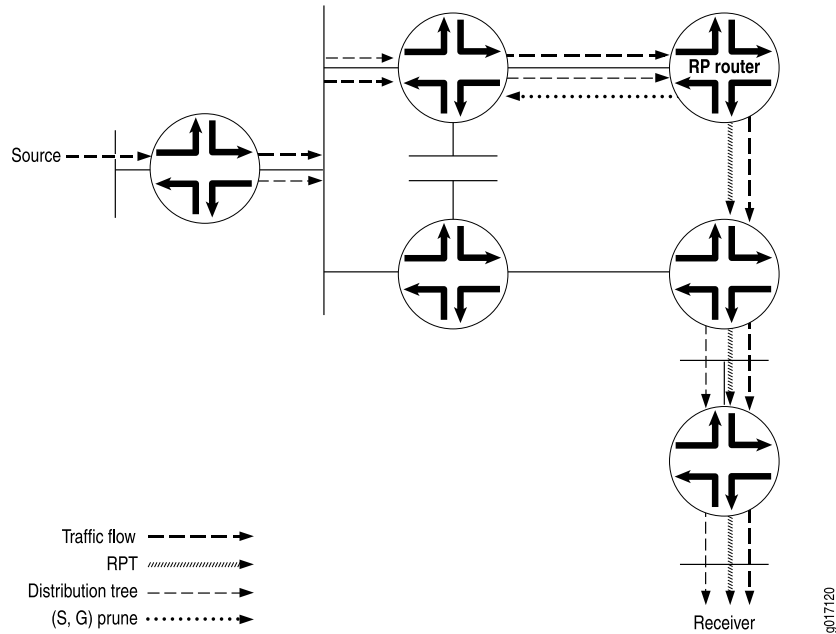

7. The receiver's DR now receives multicast packets only for the particular source from the SPT (see [Figure 131 on page 3670](#)).

**Figure 131: Source's DR Stops Sending Duplicate Multicast Packets Toward the RP Router**

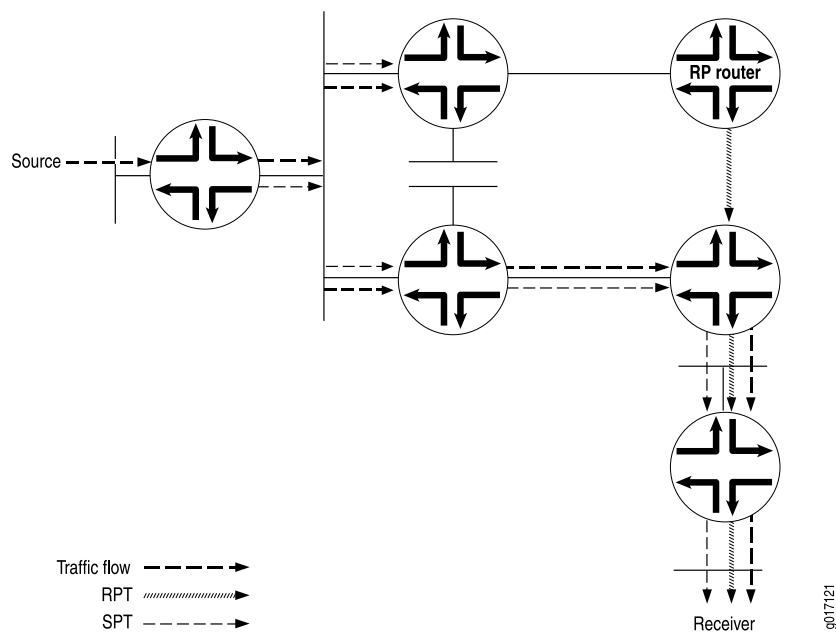



## SPT Cutover Control

In some cases, the last-hop router needs to stay on the shared tree to the RP and not transition to a direct SPT to the source. You might not want the last-hop router to transition when, for example, a low-bandwidth multicast stream is forwarded from the RP to a last-hop router. All routers between last hop and source must maintain and refresh the SPT state. This can become a resource-intensive activity that does not add much to the network efficiency for a particular pair of source and multicast group addresses.

In these cases, you configure an SPT threshold policy on the last-hop router to control the transition to a direct SPT. An SPT cutover threshold of infinity applied to a source-group address pair means the last-hop router will never transition to a direct SPT. For all other source-group address pairs, the last-hop router transitions immediately to a direct SPT rooted at the source DR.

---

## Introduction to IGMP

- [Understanding Group Membership Protocols on page 3671](#)
- [Understanding IGMP on page 3672](#)

## Understanding Group Membership Protocols

There is a big difference between the multicast protocols used between host and router and between the multicast routers themselves. Hosts on a given subnetwork need to inform their router only whether or not they are interested in receiving packets from a certain multicast group. The source host needs to inform its routers only that it is the source of traffic for a particular multicast group. In other words, no detailed knowledge of the distribution tree is needed by any hosts; only a group membership protocol is needed to inform routers of their participation in a multicast group. Between adjacent routers, on the other hand, the multicast routing protocols must avoid loops as they build a detailed sense of the network topology and distribution tree from source to leaf. So, different multicast protocols are used for the host-router portion and the router-router portion of the multicast network.

Multicast group membership protocols enable a router to detect when a host on a directly attached subnet, typically a LAN, wants to receive traffic from a certain multicast group. Even if more than one host on the LAN wants to receive traffic for that multicast group, the router sends only one copy of each packet for that multicast group out on that interface, because of the inherent broadcast nature of LANs. When the multicast group membership protocol informs the router that there are no interested hosts on the subnet, the packets are withheld and that leaf is pruned from the distribution tree.



The Internet Group Management Protocol (IGMP) and the Multicast Listener Discovery (MLD) Protocol are the standard IP multicast group membership protocols: IGMP and MLD have several versions that are supported by hosts and routers:

- IGMPv1—The original protocol defined in RFC 1112. An explicit join message is sent to the router, but a timeout is used to determine when hosts leave a group. This process wastes processing cycles on the router, especially on older or smaller routers.
- IGMPv2—Defined in RFC 2236. Among other features, IGMPv2 adds an explicit leave message to the join message so that routers can more easily determine when a group has no interested listeners on a LAN.
- IGMPv3—Defined in RFC 3376. Among other features, IGMPv3 optimizes support for a single source of content for a multicast group, or *source-specific multicast (SSM)*.
- MLDv1—Defined in RFC 2710. MLDv1 is similar to IGMPv2.
- MLDv2—Defined in RFC 3810. MLDv2 similar to IGMPv3.

The various versions of IGMP and MLD are backward compatible. It is common for a router to run multiple versions of IGMP and MLD on LAN interfaces. Backward compatibility is achieved by dropping back to the most basic of all versions run on a LAN. For example, if one host is running IGMPv1, any router attached to the LAN running IGMPv2 can drop back to IGMPv1 operation, effectively eliminating the IGMPv2 advantages. Running multiple IGMP versions ensures that both IGMPv1 and IGMPv2 hosts find peers for their versions on the router.

#### Related Documentation

- Examples: Configuring MLD

## Understanding IGMP

The Internet Group Management Protocol (IGMP) manages the membership of hosts and routers in multicast groups. IP hosts use IGMP to report their multicast group memberships to any immediately neighboring multicast routers. Multicast routers use IGMP to learn, for each of their attached physical networks, which groups have members.

IGMP is also used as the transport for several related multicast protocols (for example, Distance Vector Multicast Routing Protocol [DVMRP] and Protocol Independent Multicast version 1 [PIMv1]).

A router receives explicit join and prune messages from those neighboring routers that have downstream group members. When PIM is the multicast protocol in use, IGMP begins the process as follows:

1. To join a multicast group, G, a host conveys its membership information through IGMP.
2. The router then forwards data packets addressed to a multicast group G to only those interfaces on which explicit join messages have been received.
3. A designated router (DR) sends periodic join and prune messages toward a group-specific rendezvous point (RP) for each group for which it has active members. One or more routers are automatically or statically designated as the RP, and all routers must explicitly join through the RP.



4. Each router along the path toward the RP builds a wild card (any-source) state for the group and sends join and prune messages toward the RP.

The term *route entry* is used to refer to the state maintained in a router to represent the distribution tree.

A route entry can include such fields as:

- source address
- group address
- incoming interface from which packets are accepted
- list of outgoing interfaces to which packets are sent
- timers
- flag bits

The wild card route entry's incoming interface points toward the RP.

The outgoing interfaces point to the neighboring downstream routers that have sent join and prune messages toward the RP as well as the directly connected hosts that have requested membership to group G.

5. This state creates a shared, RP-centered, distribution tree that reaches all group members.

IGMP is an integral part of IP and must be enabled on all routers and hosts that need to receive IP multicast traffic.

For each attached network, a multicast router can be either a querier or a nonquerier. The querier router periodically sends general query messages to solicit group membership information. Hosts on the network that are members of a multicast group send report messages. When a host leaves a group, it sends a leave group message.

IGMP version 3 (IGMPv3) supports inclusion and exclusion lists. Inclusion lists enable you to specify which sources can send to a multicast group. This type of multicast group is called a source-specific multicast (SSM) group, and its multicast address is 232/8.

IGMPv3 provides support for source filtering. For example, a router can specify particular routers from which it accepts or rejects traffic. With IGMPv3, a multicast router can learn which sources are of interest to neighboring routers.

Exclusion mode works the opposite of an inclusion list. It allows any source but the ones listed to send to the SSM group.

IGMPv3 interoperates with versions 1 and 2 of the protocol. However, to remain compatible with older IGMP hosts and routers, IGMPv3 routers must also implement versions 1 and 2 of the protocol. IGMPv3 supports the following membership-report record types: mode is allowed, allow new sources, and block old sources.

#### Related Documentation

- Supported IP Multicast Protocol Standards
- Configuring IGMP



## Introduction to IGMP Snooping

---

- [IGMP Snooping Overview on page 3674](#)

### IGMP Snooping Overview

With IGMP snooping enabled, a switch monitors the IGMP (Internet Group Management Protocol) traffic between hosts and multicast routers and uses what it learns to forward multicast traffic to only the downstream interfaces that are connected to interested receivers. This conserves bandwidth by allowing the switch to send multicast traffic to only those interfaces that are connected to devices that want to receive the traffic (instead of flooding the traffic to all the downstream VLAN interfaces).

This IGMP snooping topic includes:

- [How IGMP Snooping Works on page 3674](#)
- [How IGMP Snooping Works with Routed VLAN Interfaces on page 3675](#)
- [How Hosts Join and Leave Multicast Groups on page 3675](#)
- [IGMP Snooping Support for IGMPv3 on page 3675](#)
- [IGMP Snooping and Forwarding Interfaces on page 3676](#)
- [General Forwarding Rules on page 3676](#)
- [Using a Switch as an IGMP Querier on page 3677](#)

### How IGMP Snooping Works

---

A switch usually learns unicast MAC addresses by checking the source address field of the frames it receives and then sends any traffic for that unicast address only to the appropriate interface. However, a multicast MAC address can never be the source address for a packet. As a result, when a switch receives traffic for a multicast destination address, it floods the traffic on the relevant VLAN, which can cause a significant amount of traffic to be sent unnecessarily.

IGMP snooping prevents this flooding. When you enable IGMP snooping, the switch monitors IGMP packets between receivers and multicast routers and uses the content of the packets to build a multicast cache table—a database of multicast groups and the interfaces that are connected to members of the groups. When the switch receives multicast packets, it uses the cache table to selectively forward the traffic to only the interfaces that are connected to members of the appropriate multicast groups.



**NOTE:** IGMP snooping is enabled by default on all VLANs.

---



**NOTE:** You cannot configure IGMP snooping on a secondary (private) VLAN.

---



### How IGMP Snooping Works with Routed VLAN Interfaces

A switch can use a routed VLAN interface (RVI) to forward traffic between VLANs that connect to it. IGMP snooping works with Layer 2 interfaces and RVIs to forward multicast traffic in a switched network.

When a switch receives a multicast packet, its Packet Forwarding Engines perform a multicast lookup on the packet to determine how to forward the packet to its local interfaces. From the results of the lookup, each Packet Forwarding Engine extracts a list of Layer 3 interfaces that have ports local to the Packet Forwarding Engine. If the list includes an RVI, the switch provides a bridge multicast group ID for the RVI to the Packet Forwarding Engine.

For VLANs that include multicast receivers, the bridge multicast ID includes a sub-next-hop ID, which identifies the Layer 2 interfaces in the VLAN that are interested in receiving the multicast stream. The Packet Forwarding Engine then forwards multicast traffic to bridge multicast IDs that have multicast receivers for a given multicast group.

### How Hosts Join and Leave Multicast Groups

Hosts can join multicast groups in two ways:

- By sending an unsolicited IGMP join message to a multicast router that specifies the IP multicast group that the host is attempting to join.
- By sending an IGMP join message in response to a general query from a multicast router.

A multicast router continues to forward multicast traffic to a VLAN provided that at least one host on that VLAN responds to the periodic general IGMP queries. For a host to remain a member of a multicast group, therefore, it must continue to respond to the periodic general IGMP queries.

To leave a multicast group, either a host cannot respond to the periodic general IGMP queries, which results in a "silent leave" (the only leave option for IGMPv1), or a host can send a group-specific IGMPv2 leave message.

### IGMP Snooping Support for IGMPv3

IGMPv3 enables IGMP snooping to filter multicast streams based on the source address of the multicast stream. A switch supports only IGMPv3 INCLUDE reports. EXCLUDE reports are dropped.

When a host sends an IGMPv3 INCLUDE report through a switch interface to indicate that it wants to receive a multicast stream from a source address, the switch adds the source address to its source list. The switch requests traffic for the specified multicast group from only those IP source addresses listed in the source-list parameter. However, because a switch does not support forwarding on a per-source basis, it merges all IGMPv3 reports for a VLAN to create a (\*G,V) route. This means that hosts on the same VLAN interested in traffic from group G can receive traffic for that group even if they do not specify the source in their INCLUDE report. For example, if Host 1 wants traffic for G from Source A and Host 2 wants traffic for G from Source B, they both receive traffic for G



regardless of whether A or B sends the traffic. When IGMP snooping for IGMPv3 is used with an RVI, the same (\*,G,V) route is added to the snooping information in the RVI's output interface list (olist).

### IGMP Snooping and Forwarding Interfaces

---

To determine how to forward multicast traffic, a switch with IGMP snooping enabled maintains information about the following interfaces in its multicast forwarding table:

- Multicast-router interfaces—These interfaces lead toward multicast routers or IGMP queriers.
- Group-member interfaces—These interfaces lead toward hosts that are members of multicast groups.

The switch learns about these interfaces by monitoring IGMP traffic. If an interface receives IGMP queries or Protocol Independent Multicast (PIM) updates, the switch adds the interface to its multicast forwarding table as a multicast-router interface. If an interface receives membership reports for a multicast group, the switch adds the interface to its multicast forwarding table as a group-member interface.

Table entries for interfaces that the switch learns about are subject to aging. For example, if a learned multicast-router interface does not receive IGMP queries or PIM hellos within a certain interval, the switch removes the entry for that interface from its multicast forwarding table.



**NOTE:** For a switch to learn multicast-router interfaces and group-member interfaces, an IGMP querier must exist in the network. This is often a multicast router, but if there is no multicast router on the local network, you can configure the switch itself to be an IGMP querier.

You can statically configure an interface to be a multicast-router interface or a group-member interface. The switch adds a static interface to its multicast forwarding table without having to learn about the interface, and the entry in the table is not subject to aging. You can have a mix of statically configured and dynamically learned interfaces on a switch.

### General Forwarding Rules

---

Multicast traffic received on a switch interface in a VLAN on which IGMP snooping is enabled is forwarded according to the following rules.

IGMP traffic is forwarded as follows:

- IGMP general queries received on a multicast-router interface are forwarded to all other interfaces in the VLAN.
- IGMP group-specific queries received on a multicast-router interface are forwarded to only those interfaces in the VLAN that are members of the group.
- IGMP reports received on a host interface are forwarded to multicast-router interfaces in the same VLAN, but not to the other host interfaces in the VLAN.



Multicast traffic that is not IGMP traffic is forwarded as follows:

- A multicast packet with a destination address of 224.0.0.0/24 is flooded to all other interfaces on the VLAN.
- An unregistered multicast packet—that is, a packet for a group that has no current members—is forwarded to all multicast-router interfaces in the VLAN.
- A registered multicast packet is forwarded only to those host interfaces in the VLAN that are members of the multicast group and to all multicast-router interfaces in the VLAN.

### Using a Switch as an IGMP Querier

If IGMP snooping is enabled on a pure Layer 2 local network (that is, Layer 3 is not enabled on the network), and there is not multicast router in the network, multicast traffic might not be properly forwarded through the network. This problem occurs if the local network is configured such that multicast traffic must be forwarded between switches in order to reach a multicast receiver. In this case, an upstream switch does not forward multicast traffic to a downstream switch (and therefore to the multicast receivers attached to the downstream switch) because the downstream switch does not forward IGMP reports to the upstream switch. You can solve this problem by configuring one of the switches to be an IGMP querier. This switch sends periodic general query packets to all the switches in the network, which ensures that the snooping membership tables are updated and prevents any multicast traffic loss.

If you configure multiple switches to be IGMP queriers, the switch with the highest (greatest) IGMP querier source address takes precedence and acts as the querier. Switches with lower IGMP querier source addresses stop sending IGMP queries unless they do not receive IGMP queries for 255 seconds. If a switch with a lower IGMP querier source address does not receive any IGMP queries during that period, it starts sending queries again.

#### Related Documentation

- [Example: Configuring IGMP Snooping on page 3759](#)
- [Configuring IGMP Snooping on page 3758](#)
- [Changing the IGMP Snooping Group Timeout Value on page 3759](#)
- [Monitoring IGMP Snooping on page 3925](#)
- [Configuring IGMP on page 3736](#)
- RFC 3171, *IANA Guidelines for IPv4 Multicast Address Assignments*
- IGMPv1—See RFC 1112, *Host extensions for IP multicasting*.
- IGMPv2—See RFC 2236, *Internet Group Management Protocol, Version 2*.
- IGMPv3—See RFC 3376, *Internet Group Management Protocol, Version 3*.



## Introduction to MSDP

---

- [Understanding MSDP on page 3678](#)
- [Filtering MSDP SA Messages on page 3679](#)

### Understanding MSDP

The Multicast Source Discovery Protocol (MSDP) is used to connect multicast routing domains. It typically runs on the same router as the Protocol Independent Multicast (PIM) sparse-mode rendezvous point (RP). Each MSDP router establishes adjacencies with internal and external MSDP peers similar to the way BGP establishes peers. These peer routers inform each other about active sources within the domain. When they detect active sources, the routers can send PIM sparse-mode explicit join messages to the active source.

The peer with the higher IP address passively listens to a well-known port number and waits for the side with the lower IP address to establish a Transmission Control Protocol (TCP) connection. When a PIM sparse-mode RP that is running MSDP becomes aware of a new local source, it sends source-active type, length, and values (TLVs) to its MSDP peers. When a source-active TLV is received, a peer-reverse-path-forwarding (peer-RPF) check (not the same as a multicast RPF check) is done to make sure that this peer is in the path that leads back to the originating RP. If not, the source-active TLV is dropped. This TLV is counted as a “rejected” source-active message.

The MSDP peer-RPF check is different from the normal RPF checks done by non-MSDP multicast routers. The goal of the peer-RPF check is to stop source-active messages from looping. Router R accepts source-active messages originated by Router S only from neighbor Router N or an MSDP mesh group member. For more information about configuring MSDP mesh groups, see [“Example: Configuring MSDP with Active Source Limits and Mesh Groups” on page 3773](#).

Router R locates its MSDP peer-RPF neighbor (Router N) deterministically. A series of rules is applied in a particular order to received source-active messages, and the first rule that applies determines the peer-RPF neighbor. All source-active messages from other routers are rejected.

The six rules applied to source-active messages originating at Router S received at Router R from Router X are as follows:

1. If Router X originated the source-active message (Router X is Router S), then Router X is also the peer-RPF neighbor, and its source-active messages are accepted.
2. If Router X is a member of the Router R mesh group, or is the configured peer, then Router X is the peer-RPF neighbor, and its source-active messages are accepted.
3. If Router X is the BGP next hop of the active multicast RPF route toward Router S (Router X installed the route on Router R), then Router X is the peer-RPF neighbor, and its source-active messages are accepted.
4. If Router X is an external BGP (EBGP) or internal BGP (IBGP) peer of Router R, and the last autonomous system (AS) number in the BGP AS-path to Router S is the same



as Router X's AS number, then Router X is the peer-RPF neighbor, and its source-active messages are accepted.

5. If Router X uses the same next hop as the next hop to Router S, then Router X is the peer-RPF neighbor, and its source-active messages are accepted.
6. If Router X fits none of these criteria, then Router X is not an MSDP peer-RPF neighbor, and its source-active messages are rejected.

The MSDP peers that receive source-active TLVs can be constrained by BGP reachability information. If the AS path of the network layer reachability information (NLRI) contains the receiving peer's AS number prepended second to last, the sending peer is using the receiving peer as a next hop for this source. If the split horizon information is not being received, the peer can be pruned from the source-active TLV distribution list.

**Related Documentation**

- [Configuring MSDP on page 3768](#)

## Filtering MSDP SA Messages

Along with applying MSDP source active (SA) filters on all external MSDP sessions (in and out) to prevent SAs for groups and sources from leaking in and out of the network, you need to apply bootstrap router (BSR) filters. Applying a BSR filter to the boundary of a network prevents foreign BSR messages (which announce RP addresses) from leaking into your network. Since the routers in a PIM sparse-mode domain need to know the address of only one RP router, having more than one in the network can create issues.

If you did not use multicast scoping to create boundary filters for all customer-facing interfaces, you might want to use PIM join filters. Multicast scopes prevent the actual multicast data packets from flowing in or out of an interface. PIM join filters prevent PIM sparse-mode state from being created in the first place. Since PIM join filters apply only to the PIM sparse-mode state, it might be more beneficial to use multicast scoping to filter the actual data.



**NOTE:** When you apply firewall filters, firewall action modifiers, such as **log**, **sample**, and **count**, work only when you apply the filter on an inbound interface. The modifiers do not work on an outbound interface.

**Related Documentation**

- [Understanding Multicast Administrative Scoping](#)
- [Filtering Incoming PIM Join Messages on page 3722](#)
- [Example: Configuring PIM BSR Filters on page 3719](#)

## Introduction to Source-Specific Multicast

- [Source-Specific Multicast Groups Overview on page 3680](#)
- [Understanding PIM Source-Specific Mode on page 3680](#)
- [PIM SSM on page 3682](#)



## Source-Specific Multicast Groups Overview

Source-specific multicast (SSM) is a service model that identifies session traffic by both source and group address. SSM implemented in Junos OS has the efficient explicit join procedures of Protocol Independent Multicast (PIM) sparse mode but eliminates the immediate shared tree and rendezvous point (RP) procedures using (\*,G) pairs. The (\*) is a wildcard referring to any source sending to group G, and "G" refers to the IP multicast group. SSM builds shortest-path trees (SPTs) directly represented by (S,G) pairs. The "S" refers to the source's unicast IP address, and the "G" refers to the specific multicast group address. The SSM (S,G) pairs are called channels to differentiate them from any-source multicast (ASM) groups. Although ASM supports both one-to-many and many-to-many communications, ASM's complexity is in its method of source discovery. For example, if you click a link in a browser, the receiver is notified about the group information, but not the source information. With SSM, the client receives both source and group information.

SSM is ideal for one-to-many multicast services such as network entertainment channels. However, many-to-many multicast services might require ASM.

To deploy SSM successfully, you need an end-to-end multicast-enabled network and applications that use an Internet Group Management Protocol version 3 (IGMPv3) or Multicast Listener Discovery version 2 (MLDv2) stack, or you need to configure SSM mapping from IGMPv1 or IGMPv2 to IGMPv3. An IGMPv3 stack provides the capability of a host operating system to use the IGMPv3 protocol. IGMPv3 is available for Windows XP, Windows Vista, and most UNIX operating systems.

SSM mapping allows operators to support an SSM network without requiring all hosts to support IGMPv3. This support exists in static (S,G) configurations, but SSM mapping also supports dynamic per-source group state information, which changes as hosts join and leave the group using IGMP.

SSM is typically supported with a subset of IGMPv3 and PIM sparse mode known as *PIM SSM*. Using SSM, a client can receive multicast traffic directly from the source. PIM SSM uses the PIM sparse-mode functionality to create an SPT between the client and the source, but builds the SPT without the help of an RP.

An SSM-configured network has distinct advantages over a traditionally configured PIM sparse-mode network. There is no need for shared trees or RP mapping (no RP is required), or for RP-to-RP source discovery through the Multicast Source Discovery Protocol (MSDP).

## Understanding PIM Source-Specific Mode

RFC 1112, the original multicast RFC, supported both many-to-many and one-to-many models. These came to be known collectively as any-source multicast (ASM) because ASM allowed one or many sources for a multicast group's traffic. However, an ASM network must be able to determine the locations of all sources for a particular multicast group whenever there are interested listeners, no matter where the sources might be located in the network. In ASM, the key function of *source discovery* is a required function of the network itself.



Multicast source discovery appears to be an easy process, but in sparse mode it is not. In dense mode, it is simple enough to flood traffic to every router in the whole network so that every router learns the source address of the content for that multicast group. However, the flooding presents scalability and network resource use issues and is not a viable option in sparse mode.

PIM sparse mode (like any sparse mode protocol) achieves the required source discovery functionality without flooding at the cost of a considerable amount of complexity. The RP routers must be added and must know all multicast sources, and complicated shared distribution trees must be built to the RPs.

In an environment where many sources come and go, such as for a videoconferencing service, ASM is appropriate. However, by ignoring the many-to-many model and focusing attention on the one-to-many source-specific multicast (SSM) model, several commercially promising multicast applications, such as television channel distribution over the Internet, might be brought to the Internet much more quickly and efficiently than if full ASM functionality were required of the network.

PIM SSM is simpler than PIM sparse mode because only the one-to-many model is supported. Initial commercial multicast Internet applications are likely to be available to *subscribers* (that is, receivers that issue join messages) from only a single source (a special case of SSM covers the need for a backup source). PIM SSM therefore forms a subset of PIM sparse mode. PIM SSM builds shortest-path trees (SPTs) rooted at the source immediately because in SSM, the router closest to the interested receiver host is informed of the unicast IP address of the source for the multicast traffic. That is, PIM SSM bypasses the RP connection stage through shared distribution trees, as in PIM sparse mode, and goes directly to the source-based distribution tree.

PIM SSM introduces new terms for many of the concepts in PIM sparse mode. PIM SSM can technically be used in the entire 224/4 multicast address range, although PIM SSM operation is guaranteed only in the 232/8 range (232.0.0/24 is reserved). The new SSM terms are appropriate for Internet video applications and are summarized in [Table 238 on page 3681](#).

**Table 238: ASM and SSM Terminology**

| Term                | Any-Source Multicast  | Source-Specific Multicast         |
|---------------------|-----------------------|-----------------------------------|
| Address identifier  | G                     | S,G                               |
| Address designation | group                 | channel                           |
| Receiver operations | join, leave           | subscribe, unsubscribe            |
| Group address range | 224/4 excluding 232/8 | 224/4 (guaranteed only for 232/8) |

Although PIM SSM describes receiver operations as *subscribe* and *unsubscribe*, the same PIM sparse mode join and leave messages are used by both forms of the protocol. The terminology change distinguishes ASM from SSM even though the receiver messages are identical.



## PIM SSM

PIM source-specific multicast (SSM) uses a subset of PIM sparse mode and IGMP version 3 (IGMPv3) to allow a client to receive multicast traffic directly from the source. PIM SSM uses the PIM sparse-mode functionality to create an SPT between the receiver and the source, but builds the SPT without the help of an RP.

By default, the SSM group multicast address is limited to the IP address range from 232.0.0.0 through 232.255.255.255. However, you can extend SSM operations into another Class D range by including the **ssm-groups** statement at the **[edit routing-options multicast]** hierarchy level. The default SSM address range from 232.0.0.0 through 232.255.255.255 cannot be used in the **ssm-groups** statement. This statement is for adding other multicast addresses to the default SSM group addresses. This statement does not override the default SSM group address range.


You can also configure the Junos OS to accept any-source multicast (ASM) join messages (\*G) for group addresses that are within the default or configured range of source-specific multicast (SSM) groups. This allows you to support a mix of any-source and source-specific multicast groups simultaneously.

An SSM-configured network has distinct advantages over a traditionally configured PIM sparse-mode network. There is no need for shared trees or RP mapping (no RP is required), or for RP-to-RP source discovery through MSDP.

Deploying SSM is easy. You need to configure PIM sparse mode on all router interfaces and issue the necessary SSM commands, including specifying IGMPv3 on the receiver's LAN. If PIM sparse mode is not explicitly configured on both the source and group member interfaces, multicast packets are not forwarded. Source lists, supported in IGMPv3, are used in PIM SSM. As sources become active and start sending multicast packets, interested receivers in the SSM group receive the multicast packets.

In a PIM SSM-configured network, a host subscribes to an SSM channel (by means of IGMPv3), announcing a desire to join group G and source S (see [Figure 132 on page 3682](#)). The directly connected PIM sparse-mode router, the receiver's DR, sends an (S,G) join message to its RPF neighbor for the source. Notice in [Figure 132 on page 3682](#) that the RP is not contacted in this process by the receiver, as would be the case in normal PIM sparse-mode operations.


**Figure 132: Receiver Announces Desire to Join Group G and Source S**

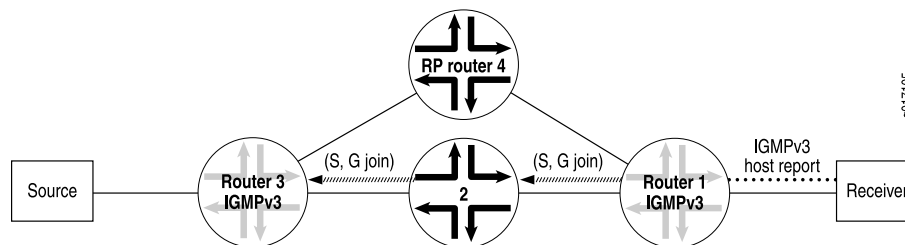

The (S,G) join message initiates the source tree and then builds it out hop by hop until it reaches the source. In [Figure 133 on page 3683](#), the source tree is built across the network to Router 3, the last-hop router connected to the source.




Figure 133: Router 3 (Last-Hop Router) Joins the Source Tree

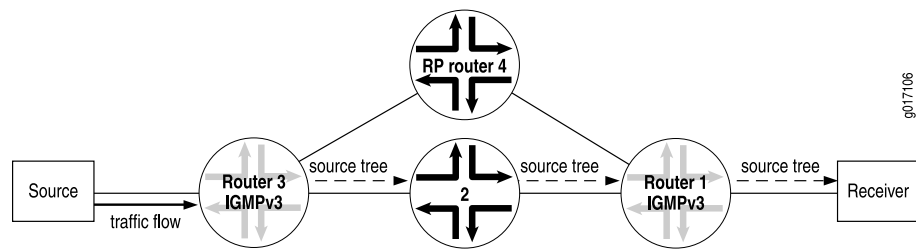

Using the source tree, multicast traffic is delivered to the subscribing host (see [Figure 134 on page 3683](#)).

Figure 134: (S,G) State Is Built Between the Source and the Receiver

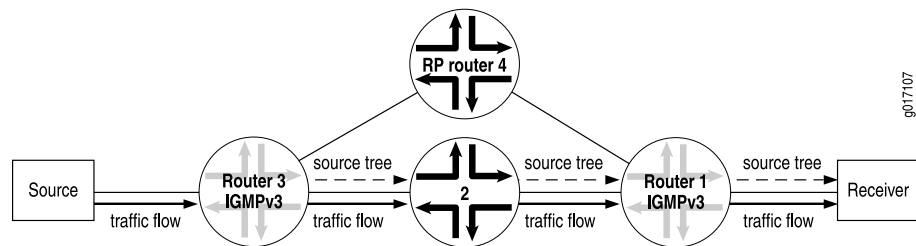

To configure additional SSM groups, include the **ssm-groups** statement at the **[edit routing-options multicast]** hierarchy level.

#### Related Documentation

- [Source-Specific Multicast Groups Overview on page 3680](#)
- [Example: Configuring Source-Specific Multicast Groups with Any-Source Override on page 3788](#)

## Introduction to Multicast VLAN Registration

- [Understanding Multicast VLAN Registration on page 3683](#)

### Understanding Multicast VLAN Registration

Multicast VLAN registration (MVR) enables you to efficiently distribute IPTV multicast streams across an Ethernet ring-based Layer 2 network and reduce the amount of bandwidth consumed by this multicast traffic.

In a standard Layer 2 network, a multicast stream received on one VLAN is never distributed to interfaces outside that VLAN. If hosts in multiple VLANs request the same multicast stream, a separate copy of that multicast stream is distributed to the requesting VLANs.

MVR introduces the concept of a *multicast source VLAN* (MVLAN), which is created by MVR and becomes the only VLAN over which IPTV multicast traffic flows throughout the Layer 2 network. The Juniper Networks EX Series Ethernet Switch or the QFX Series that is enabled for MVR selectively forwards IPTV multicast traffic from interfaces on the MVLAN (source interfaces) to hosts that are connected to interfaces that are not part of the MVLAN. These interfaces are known as *MVR receiver ports*. The MVR receiver



ports can receive traffic from a port on the MVLAN but cannot send traffic onto the MVLAN, and they remain in their own VLANs for bandwidth and security reasons.

This topic includes:

- [How MVR Works on page 3684](#)

### How MVR Works

---

In many ways, MVR is similar to IGMP snooping. Both MVR and IGMP snooping monitor IGMP join and leave messages and build forwarding tables based on the media access control (MAC) addresses of the hosts sending those IGMP messages. Whereas IGMP snooping operates within a given VLAN to regulate multicast traffic, MVR can operate with hosts on different VLANs in a Layer 2 network to selectively deliver IPTV multicast traffic to requesting hosts, thereby reducing the amount of bandwidth needed to forward multicast traffic.

When you configure an MVLAN, you assign a range of multicast group addresses to it. You then configure other VLANs to be MVR receiver VLANs, which receive multicast streams from the MVLAN. The MVR receiver ports comprise all the interfaces that exist on any of the MVR receiver VLANs. Interfaces that are on the MVLAN itself cannot be MVR receiver ports for that MVLAN.



**NOTE:** MVR is supported on VLANs running IGMP version 2 (IGMPv2) only.

---

### MVR Modes

MVR operates in two modes: MVR transparent mode and MVR proxy mode. Both modes enable MVR to forward only one copy of a multicast stream to the Layer 2 network.

- [MVR Transparent Mode on page 3684](#)
- [MVR Proxy Mode on page 3685](#)

### MVR Transparent Mode

In MVR transparent mode, the switch receives one copy of each IPTV multicast stream and then replicates the stream only to those hosts that want to receive it, while forwarding all other types of multicast traffic without modification. Transparent mode is the default mode.

The switch handles IGMP packets destined for both the multicast source VLAN and multicast receiver VLANs in the same way that it handles them when MVR is not being used. That is, when a host on a VLAN sends IGMP join and leave messages, the switch floods the messages to all router interfaces in the VLAN. Similarly, when a VLAN receives IGMP queries from its router interfaces, it floods the queries to all interfaces in the VLAN.

If a host on a multicast receiver port joins an MVR group on the multicast receiver VLAN, the appropriate bridging entry is added and the MVLAN forwards that group's IPTV multicast traffic on that port (even though that port is not in the MVLAN). Likewise, if a host on a multicast receiver port leaves an MVR group on the multicast receiver VLAN, the appropriate bridging entry is deleted, and the MVLAN stops forwarding that group's



IPTV multicast traffic on that port. In addition, you can configure the switch to statically install the bridging entries on the multicast receiver VLAN.

### ***MVR Proxy Mode***

When you use MVR in proxy mode, the switch acts as a proxy for any MVR group in both the upstream and downstream directions. In the downstream direction, the switch acts as the querier for the groups in the MVR receiver VLANs. In the upstream direction, the switch originates the IGMP reports and leaves and answers IGMP queries from multicast routers. When the MVR receiver VLANs receive IGMP joins and leaves, the switch creates bridging entries on the MVLAN as needed, as it does in MVR transparent mode. In addition, the switch sends out IGMP joins and leaves on the MVLAN based on these bridging entries.

Configuring MVR proxy mode on the MVLAN automatically enables IGMP snooping proxy mode on all MVR receiver VLANs as well as on the MVLAN.

#### **Related Documentation**

- [Example: Configuring Multicast VLAN Registration on page 3763](#)
- [Configuring Multicast VLAN Registration \(CLI Procedure\) on page 3762](#)







## CHAPTER 44

# Configuration

- [PIM Basics on page 3687](#)
- [PIM Designated Router on page 3694](#)
- [PIM Sparse Mode on page 3696](#)
- [Static RP on page 3705](#)
- [Anycast RP on page 3708](#)
- [PIM Bootstrap Router on page 3717](#)
- [PIM Filtering on page 3719](#)
- [PIM RPT and SPT Cutover on page 3725](#)
- [PIM and the BFD Protocol on page 3731](#)
- [IGMP on page 3736](#)
- [IGMP Snooping on page 3757](#)
- [MSDP on page 3768](#)
- [Source-Specific Multicast on page 3783](#)
- [PIM Configuration Statements on page 3795](#)
- [IGMP Configuration Statements on page 3863](#)
- [IGMP Snooping Configuration Statements on page 3886](#)
- [MSDP Configuration Statements on page 3900](#)
- [Source-Specific Multicast Configuration Statements on page 3920](#)

## PIM Basics

---

- [Changing the PIM Version on page 3687](#)
- [Modifying the PIM Hello Interval on page 3688](#)
- [Preserving Multicast Performance by Disabling Response to the ping Utility on page 3689](#)
- [Configuring PIM Trace Options on page 3690](#)
- [Disabling PIM on page 3692](#)

## Changing the PIM Version

All systems on a subnet must run the same version of PIM.



The default PIM version can be version 1 or version 2, depending on the mode you are configuring. PIMv1 is the default for rendezvous point (RP) mode (at the **[edit protocols pim rp static address address]** hierarchy level). However, PIMv2 is the default for interface mode (at the **[edit protocols pim interface interface-name]** hierarchy level). Explicitly configured versions override the defaults.

To configure the PIM version, include the **version** statement:

```
version (1 | 2);
```

## Modifying the PIM Hello Interval

Routing devices send hello messages at a fixed interval on all PIM-enabled interfaces. By using hello messages, routing devices advertise their existence as PIM routing devices on the subnet. With all PIM-enabled routing devices advertised, a single designated router for the subnet is established.

When a routing device is configured for PIM, it sends a hello message at a 30-second default interval. The interval range is from 0 through 255. When the interval counts down to 0, the routing device sends another hello message, and the timer is reset. A routing device that receives no response from a neighbor in 3.5 times the interval value drops the neighbor. In the case of a 30-second interval, the amount of time a routing device waits for a response is 105 seconds.

If a PIM hello message contains the hold-time option, the neighbor timeout is set to the hold-time sent in the message. If a PIM hello message does not contain the hold-time option, the neighbor timeout is set to the default hello hold time.

To modify how often the routing device sends hello messages out of an interface:

1. This example shows the configuration for the routing instance. Configure the interface globally or in the routing instance.

```
[edit routing-instances PIM.master protocols pim interface fe-3/0/2.0]
user@host# set hello-interval 255
```

2. Verify the configuration by checking the **Hello Option Holdtime** field in the output of the **show pim neighbors detail** command.

```
user@host> show pim neighbors detail
Instance: PIM.master
Interface: fe-3/0/2.0
Address: 192.168.195.37, IPv4, PIM v2, Mode: Sparse
Hello Option Holdtime: 255 seconds
Hello Option DR Priority: 1
Hello Option LAN Prune Delay: delay 500 ms override 2000 ms
Join Suppression supported
Rx Join: Group Source Timeout
225.1.1.1 192.168.195.78 0
225.1.1.1 0

Interface: lo0.0
Address: 10.255.245.91, IPv4, PIM v2, Mode: Sparse
Hello Option Holdtime: 255 seconds
Hello Option DR Priority: 1
Hello Option LAN Prune Delay: delay 500 ms override 2000 ms
Join Suppression supported
```



```

Interface: pd-6/0/0.32768
Address: 0.0.0.0, IPv4, PIM v2, Mode: Sparse
Hello Option Holdtime: 255 seconds
Hello Option DR Priority: 0
Hello Option LAN Prune Delay: delay 500 ms override 2000 ms
Join Suppression supported

```

**Related Documentation**

- [show pim neighbors on page 4036](#) in the Junos OS Operational Mode Commands

## Preserving Multicast Performance by Disabling Response to the ping Utility

The ping utility uses ICMP Echo messages to verify connectivity to any device with an IP address. However, in the case of multicast applications, a single ping sent to a multicast address can degrade the performance of routers because the stream of packets is replicated multiple times.

You can disable the router's response to ping (ICMP Echo) packets sent to multicast addresses. The system responds normally to unicast ping packets.

To disable the router's response to ping packets sent to multicast addresses:

1. Include the **no-multicast-echo** statement:

```

[edit system]
user@host# set no-multicast-echo

```

2. Verify the configuration by checking the **echo drops with broadcast or multicast destination address** field in the output of the **show system statistics icmp** command.

```

user@host> show system statistics icmp

icmp:
0 drops due to rate limit
0 calls to icmp_error
0 errors not generated because old message was icmp
Output histogram:
echo reply: 21
0 messages with bad code fields
0 messages less than the minimum length
0 messages with bad checksum
0 messages with bad source address
0 messages with bad length
100 echo drops with broadcast or multicast destination address
0 timestamp drops with broadcast or multicast destination address
Input histogram:
echo: 21
21 message responses generated

```

**Related Documentation**

- [Configuring the Junos OS to Disable the Routing Engine Response to Multicast Ping Packets in the Junos OS System Basics Configuration Guide](#)
- [show system statistics icmp in the Junos OS Operational Mode Commands](#)



## Configuring PIM Trace Options

Tracing operations record detailed messages about the operation of routing protocols, such as the various types of routing protocol packets sent and received, and routing policy actions. You can specify which trace operations are logged by including specific tracing flags. The following table describes the flags that you can include.

| Flag                             | Description                                                                                                                                                     |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>all</b>                       | Trace all operations.                                                                                                                                           |
| <b>assert</b>                    | Trace assert messages, which are used to resolve which of the parallel routers connected to a multiaccess LAN is responsible for forwarding packets to the LAN. |
| <b>autorp</b>                    | Trace bootstrap, RP, and auto-RP messages.                                                                                                                      |
| <b>bidirectional-df-election</b> | Trace bidirectional PIM designated-forwarder (DF) election events.                                                                                              |
| <b>bootstrap</b>                 | Trace bootstrap messages, which are sent periodically by the PIM domain's bootstrap router and are forwarded, hop by hop, to all routers in that domain.        |
| <b>general</b>                   | Trace general events.                                                                                                                                           |
| <b>graft</b>                     | Trace graft and graft acknowledgment messages.                                                                                                                  |
| <b>hello</b>                     | Trace hello packets, which are sent so that neighboring routers can discover one another.                                                                       |
| <b>join</b>                      | Trace join messages, which are sent to join a branch onto the multicast distribution tree.                                                                      |
| <b>mdt</b>                       | Trace messages related to multicast data tunnels.                                                                                                               |
| <b>normal</b>                    | Trace normal events.                                                                                                                                            |
| <b>nsr-synchronization</b>       | Trace nonstop routing synchronization events                                                                                                                    |
| <b>packets</b>                   | Trace all PIM packets.                                                                                                                                          |
| <b>policy</b>                    | Trace poison-route-reverse packets.                                                                                                                             |
| <b>prune</b>                     | Trace prune messages, which are sent to prune a branch off the multicast distribution tree.                                                                     |
| <b>register</b>                  | Trace register and register-stop messages. Register messages are sent to the RP when a multicast source first starts sending to a group.                        |
| <b>route</b>                     | Trace routing information.                                                                                                                                      |



| Flag         | Description                        |
|--------------|------------------------------------|
| <b>rp</b>    | Trace candidate RP advertisements. |
| <b>state</b> | Trace state transitions.           |
| <b>task</b>  | Trace task processing.             |
| <b>timer</b> | Trace timer processing.            |

In the following example, tracing is enabled for all routing protocol packets. Then tracing is narrowed to focus only on PIM packets of a particular type.

To configure tracing operations for PIM:

1. (Optional) Configure tracing at the [**routing-options** hierarchy level to trace all protocol packets.

```
[edit routing-options traceoptions]
user@host# set file all-packets-trace
user@host# set flag all
```

2. Configure the filename for the PIM trace file.

```
[edit protocols pim traceoptions]
user@host# set file pim-trace
```

3. (Optional) Configure the maximum number of trace files.

```
[edit protocols pim traceoptions]
user@host# set file files 5
```

4. (Optional) Configure the maximum size of each trace file.

```
[edit protocols pim traceoptions]
user@host# set file size 1m
```

5. (Optional) Enable unrestricted file access.

```
[edit protocols pim traceoptions]
user@host# set file world-readable
```

6. Configure tracing flags.

Suppose you are troubleshooting issues with PIM version 1 control packets that are received on an interface configured for PIM version 2. The following example shows how to trace messages associated with this problem.

```
[edit protocols pim traceoptions]
user@host# set flag packets | match "Rx V1 Require V2"
```

7. View the trace file.

```
user@host> file list /var/log
user@host> file show /var/log/pim-trace
```

**Related Documentation**

- [PIM Overview on page 3651](#)



- Junos OS Tracing and Logging Operations in the Junos OS System Basics Configuration Guide

## Disabling PIM

By default, when configured, the PIM protocol is enabled on all interfaces for all families. If desired, you can disable PIM at the protocol, interface, or family hierarchy levels.

The hierarchy in which you configure PIM is critical. In general, the most specific configuration takes precedence. However, if PIM is disabled at the protocol level, then any disable statements with respect to an interface or family are ignored.

For example, the order of precedence for disabling PIM on a particular interface family is:

1. If PIM is disabled at the **[edit protocols pim interface *interface-name* family]** hierarchy level, then PIM is disabled for that interface family.
2. If PIM is not configured at the **[edit protocols pim interface *interface-name* family]** hierarchy level, but is disabled at the **[edit protocols pim interface *interface-name*]** hierarchy level, then PIM is disabled for all families on the specified interface.
3. If PIM is not configured at either the **[edit protocols pim interface *interface-name* family]** hierarchy level or the **[edit protocols pim interface *interface-name*]** hierarchy level, but is disabled at the **[edit protocols pim]** hierarchy level, then the PIM protocol is disabled globally for all interfaces and all families.

The following sections describe how to disable PIM at the various hierarchy levels.

- [Disabling the PIM Protocol on page 3692](#)
- [Disabling PIM On an Interface on page 3693](#)
- [Disabling PIM for a Family on page 3693](#)
- [Disabling PIM for a Rendezvous Point on page 3694](#)

---

### Disabling the PIM Protocol

You can explicitly disable the PIM protocol. Disabling the PIM protocol disables the protocol for all interfaces and all families. This is accomplished at the **[edit protocols pim]** hierarchy level:

```
[edit protocols]
pim {
  disable;
}
```

To disable the PIM protocol:

1. Include the **disable** statement.  
  
user@host# **set protocols pim disable**
2. (Optional) Verify your configuration settings before committing them by using the **show protocols pim** command.



```
user@host# run show protocols pim
```

---

### Disabling PIM On an Interface

---

You can disable the PIM protocol on a per-interface basis. This is accomplished at the **[edit protocols pim interface *interface-name*]** hierarchy level:

```
[edit protocols]
pim {
  interface interface-name {
    disable;
  }
}
```

To disable PIM on an interface:

1. Include the **disable** statement.

```
user@host# set protocols pim interface fe-0/1/0 disable
```

2. (Optional) Verify your configuration settings before committing them by using the **show protocols pim** command.

```
user@host# run show protocols pim
```

---

### Disabling PIM for a Family

---

You can disable the PIM protocol on a per-family basis. This is accomplished at the **[edit protocols pim family]** hierarchy level:

```
[edit protocols]
pim {
  family inet {
    disable;
  }
  family inet6 {
    disable;
  }
}
```

To disable PIM for a family:

1. Include the **disable** statement.

```
user@host# set protocols pim family inet disable
```

```
user@host# set protocols pim family inet6 disable
```

2. (Optional) Verify your configuration settings before committing them by using the **show protocols pim** command.

```
user@host# run show protocols pim
```



### Disabling PIM for a Rendezvous Point

---

You can disable the PIM protocol for a rendezvous point (RP) on a per-family basis. This is accomplished at the **[edit protocols pim rp local family]** hierarchy level:

```
[edit protocols]
pim {
  rp {
    local {
      family inet {
        disable;
      }
      family inet6 {
        disable;
      }
    }
  }
}
```

To disable PIM for an RP family:

1. Use the **disable** statement.

```
user@host# set protocols pim rp local family inet disable
user@host# set protocols pim rp local family inet6 disable
```

2. (Optional) Verify your configuration settings before committing them by using the **show protocols pim** command.

```
user@host# run show protocols pim
```

## PIM Designated Router

---

- [Configuring Interface Priority for PIM Designated Router Selection on page 3694](#)
- [Configuring PIM Designated Router Election on Point-to-Point Links on page 3695](#)

### Configuring Interface Priority for PIM Designated Router Selection

A designated router (DR) sends periodic join messages and prune messages toward a group-specific rendezvous point (RP) for each group for which it has active members. When a Protocol Independent Multicast (PIM) router learns about a source, it originates a Multicast Source Discovery Protocol (MSDP) source-address message if it is the DR on the upstream interface.

By default, every PIM interface has the lowest probability (priority 0) of being selected as the DR. Configuring the interface DR priority helps ensure that changing an IP address does not alter your forwarding model.

To configure the interface designated router priority:

1. This example shows the configuration for the routing instance. Configure the interface globally or in the routing instance.

```
[edit routing-instances PIM.master protocols pim interface ge-0/0/0.0 family inet]
user@host# set priority 5
```



2. Verify the configuration by checking the **Hello Option DR Priority** field in the output of the **show pim neighbors detail** command.

```
user@host> show pim neighbors detail
```

```
Instance: PIM.master
Interface: ge-0/0/0.0
Address: 192.168.195.37, IPv4, PIM v2, Mode: Sparse
Hello Option Holdtime: 65535 seconds
Hello Option DR Priority: 5
Hello Option LAN Prune Delay: delay 500 ms override 2000 ms
Join Suppression supported
Rx Join: Group Source Timeout
225.1.1.1 192.168.195.78 0
225.1.1.1 0
```

```
Interface: lo0.0
Address: 10.255.245.91, IPv4, PIM v2, Mode: Sparse
Hello Option Holdtime: 65535 seconds
Hello Option DR Priority: 1
Hello Option LAN Prune Delay: delay 500 ms override 2000 ms
Join Suppression supported
```

```
Interface: pd-6/0/0.32768
Address: 0.0.0.0, IPv4, PIM v2, Mode: Sparse
Hello Option Holdtime: 65535 seconds
Hello Option DR Priority: 0
Hello Option LAN Prune Delay: delay 500 ms override 2000 ms
Join Suppression supported
```

#### Related Documentation

- [Configuring PIM Designated Router Election on Point-to-Point Links on page 3695](#)
- [Understanding PIM Sparse Mode on page 3655](#)
- [show pim neighbors on page 4036](#) in the Junos OS Operational Mode Commands

## Configuring PIM Designated Router Election on Point-to-Point Links

To comply with the latest PIM drafts, enable designated router (DR) election on all PIM interfaces, including point-to-point (P2P) interfaces. (DR election is enabled by default on all other interfaces.) One of the two routers might join a multicast group on its P2P link interface. The DR on that link is responsible for initiating the relevant join messages.

To enable DR election on point-to-point interfaces:

1. On both point-to-point link routers, configure the router globally or in the routing instance. This example shows the configuration for the routing instance.  

```
[edit routing-instances PIM.master protocols pim]
user@host# set dr-election-on-p2p
```
2. Verify the configuration by checking the **State** field in the output of the **show pim interfaces** command. The possible values for the **State** field are DR, NotDR, and P2P. When a point-to-point link interface is elected to be the DR, the interface state becomes DR instead of P2P.



3. If the **show pim interfaces** command continues to report the P2P state, consider running the **restart routing** command on both routers on the point-to-point link. Then recheck the state.



**CAUTION:** Do not restart a software process unless specifically asked to do so by your Juniper Networks customer support representative. Restarting a software process during normal operation of a routing platform could cause interruption of packet forwarding and loss of data.

[edit]  
user@host# run restart routing

#### Related Documentation

- [Understanding PIM Sparse Mode on page 3655](#)
- [Configuring Interface Priority for PIM Designated Router Selection on page 3694](#)
- [show pim interfaces on page 4024](#) in the Junos OS Operational Mode Commands

## PIM Sparse Mode

---

- [Enabling PIM Sparse Mode on page 3696](#)
- [Configuring PIM Join Load Balancing on page 3697](#)
- [Modifying the Join State Timeout on page 3700](#)
- [Example: Enabling Join Suppression on page 3701](#)

### Enabling PIM Sparse Mode

In PIM sparse mode (PIM-SM), the assumption is that very few of the possible receivers want packets from a source, so the network establishes and sends packets only on branches that have at least one leaf indicating (by message) a desire for the traffic. WANs are appropriate networks for sparse-mode operation.

By default, PIM is disabled. When you enable PIM, it operates in sparse mode by default. You do not need to configure Internet Group Management Protocol (IGMP) version 2 for a sparse mode configuration. After you enable PIM, by default, IGMP version 2 is also enabled.



All systems on a subnet must run the same version of PIM.

The default PIM version can be version 1 or version 2, depending on the mode you are configuring. PIMv1 is the default for rendezvous point (RP) mode (at the **[edit protocols pim rp static address address]** hierarchy level). However, PIMv2 is the default for interface mode (at the **[edit protocols pim interface interface-name]** hierarchy level). Explicitly configured versions override the defaults. The following example explicitly configures PIMv2 on the interfaces.

You can configure PIM sparse mode globally or for a routing instance. This example shows how to configure PIM sparse mode globally on all interfaces. It also shows how to configure a static RP router and how to configure the non-RP routers.

To configure the router properties for PIM sparse mode:

1. Configure the static RP router.

```
[edit protocols pim]
user@host# set rp local family inet address 192.168.3.253
```

2. Configure the RP router interfaces. When configuring all interfaces, exclude the **fxp0.0** management interface by including the **disable** statement for that interface.

```
[edit protocols pim]
user@host# set interface all mode sparse
user@host# set interface all version 2
user@host# set interface fxp0.0 disable
```

3. Configure the non-RP routers. Include the following configuration on all of the non-RP routers.

```
[edit protocols pim]
user@host# set rp static address 198.58.3.253 version 2
user@host# set interface all mode sparse
user@host# set interface all version 2
user@host# set interface fxp0.0 disable
```

4. Monitor the operation of PIM sparse mode.

- [show pim interfaces](#)
- [show pim join](#)
- [show pim neighbors](#)
- [show pim rps](#)

#### Related Documentation

- [Understanding PIM Sparse Mode on page 3655](#)

## Configuring PIM Join Load Balancing

By default, PIM join messages are sent toward a source based on the RPF routing table check. If there is more than one equal-cost path toward the source, then one upstream interface is chosen to send the join message. This interface is also used for all downstream traffic, so even though there are alternative interfaces available, the multicast load is concentrated on one upstream interface and routing device.



For PIM sparse mode, you can configure PIM join load balancing to spread join messages and traffic across equal-cost upstream paths (interfaces and routing devices) provided by unicast routing toward a source. PIM join load balancing is only supported for PIM sparse mode configurations.

PIM join load balancing is supported on draft-rosen multicast VPNs (also referred to as dual PIM multicast VPNs). PIM join load balancing is not supported on multiprotocol BGP-based multicast VPNs (also referred to as next-generation Layer 3 VPN multicast). When PIM join load balancing is enabled in a draft-rosen Layer 3 VPN scenario, the load balancing is achieved based on the join counts for the far-end PE routing devices, not for any intermediate P routing devices.

If an internal BGP (IBGP) multipath forwarding VPN route is available, the Junos OS uses the multipath forwarding VPN route to send join messages to the remote PE routers to achieve load balancing over the VPN.

By default, when multiple PIM joins are received for different groups, all joins are sent to the same upstream gateway chosen by the unicast routing protocol. Even if there are multiple equal-cost paths available, these alternative paths are not utilized to distribute multicast traffic from the source to the various groups.

When PIM join load balancing is configured, the PIM joins are distributed equally among all equal-cost upstream interfaces and neighbors. Every new join triggers the selection of the least-loaded upstream interface and neighbor. If there are multiple neighbors on the same interface (for example, on a LAN), join load balancing maintains a value for each of the neighbors and distributes multicast joins (and downstream traffic) among these as well.

Join counts for interfaces and neighbors are maintained globally, not on a per-source basis. Therefore, there is no guarantee that joins for a particular source are load-balanced. However, the joins for all sources and all groups known to the routing device are load-balanced. There is also no way to administratively give preference to one neighbor over another: all equal-cost paths are treated the same way.

You can configure message filtering globally or for a routing instance. This example shows the global configuration.

You configure PIM join load balancing on the non-RP routers in the PIM domain.

1. Determine if there are multiple paths available for a source (for example, an RP) with the output of the **show pim join extensive** or **show pim source** commands.

```
user@host> show pim join extensive
Instance: PIM.master Family: INET

Group: 224.1.1.1
Source: *
RP: 10.255.245.6
Flags: sparse,rptree,wildcard
Upstream interface: t1-0/2/3.0
Upstream neighbor: 192.168.38.57
Upstream state: Join to RP
Downstream neighbors:
  Interface: t1-0/2/1.0
```



```

192.168.38.16 State: JOIN Flags; SRW Timeout: 164
Group: 224.2.127.254
Source: *
RP: 10.255.245.6
Flags: sparse,rptree,wildcard
Upstream interface: so-0/3/0.0
Upstream neighbor: 192.168.38.47
Upstream state: Join to RP
Downstream neighbors:
Interface: t1-0/2/3.0
192.168.38.16 State: JOIN Flags; SRW Timeout: 164

```

Note that for this router, the RP at IP address 10.255.245.6 is the source for two multicast groups: 224.1.1.1 and 224.2.127.254. This router has two equal-cost paths through two different upstream interfaces (**t1-0/2/3.0** and **so-0/3/0.0**) with two different neighbors (192.168.38.57 and 192.168.38.47). This router is a good candidate for PIM join load balancing.

2. On the non-RP router, configure PIM join load balancing.

```

[edit protocols pim rp]
user@host# set static address 10.10.10.1
user@host# set interface all mode sparse version 2
user@host# set join-load-balance

```

The static address is the address of the RP.

3. Monitor the operation.

If load balancing is enabled for this router, the number of PIM joins sent on each interface is shown in the output for the **show pim interfaces** command.

```

user@host> show pim interfaces
Instance: PIM.master

```

| Name           | Stat | Mode   | IP V | State | NbrCnt | JoinCnt | DR address         |
|----------------|------|--------|------|-------|--------|---------|--------------------|
| lo0.0          | Up   | Sparse | 4 2  | DR    | 0      | 0       | 10.255.168.58      |
| pe-1/2/0.32769 | Up   | Sparse | 4 2  | P2P   | 0      | 0       |                    |
| so-0/3/0.0     | Up   | Sparse | 4 2  | P2P   | 1      | 1       |                    |
| t1-0/2/1.0     | Up   | Sparse | 4 2  | P2P   | 1      | 0       |                    |
| t1-0/2/3.0     | Up   | Sparse | 4 2  | P2P   | 1      | 1       |                    |
| lo0.0          | Up   | Sparse | 6 2  | DR    | 0      | 0       | fe80::2a0:a5ff:4b7 |

Note that the two equal-cost paths shown by the **show pim interfaces** command now have nonzero join counts. If the counts differ by more than one and were zero (0) when load balancing commenced, an error occurs (joins before load balancing are not redistributed). The join count also appears in the **show pim neighbors detail** output:

```

user@host> show pim neighbors detail
Interface: so-0/3/0.0

Address: 192.168.38.46, IPv4, PIM v2, Mode: Sparse, Join Count: 0
Hello Option Holdtime: 65535 seconds
Hello Option DR Priority: 1
Hello Option Generation ID: 1689116164
Hello Option LAN Prune Delay: delay 500 ms override 2000 ms

Address: 192.168.38.47, IPv4, PIM v2, Join Count: 1
BFD: Disabled
Hello Option Holdtime: 105 seconds 102 remaining
Hello Option DR Priority: 1

```



```
Hello Option Generation ID: 792890329
Hello Option LAN Prune Delay: delay 500 ms override 2000 ms
```

```
Interface: t1-0/2/3.0
```

```
Address: 192.168.38.56, IPv4, PIM v2, Mode: Sparse, Join Count: 0
Hello Option Holdtime: 65535 seconds
Hello Option DR Priority: 1
Hello Option Generation ID: 678582286
Hello Option LAN Prune Delay: delay 500 ms override 2000 ms
```

```
Address: 192.168.38.57, IPv4, PIM v2, Join Count: 1
BFD: Disabled
Hello Option Holdtime: 105 seconds 97 remaining
Hello Option DR Priority: 1
Hello Option Generation ID: 1854475503
Hello Option LAN Prune Delay: delay 500 ms override 2000 ms
```

Note that the join count is nonzero on the two load-balanced interfaces toward the upstream neighbors.

PIM join load balancing only takes effect when the feature is configured. Prior joins are not redistributed to achieve perfect load balancing. In addition, if an interface or neighbor fails, the new joins are redistributed among remaining active interfaces and neighbors. However, when the interface or neighbor is restored, prior joins are not redistributed. The **clear pim join-distribution** command redistributes the existing flows to new or restored upstream neighbors. Redistributing the existing flows causes traffic to be disrupted, so we recommend that you perform PIM join redistribution during a maintenance window.

#### Related Documentation

- [clear pim join-distribution](#) in the Junos OS Operational Mode Commands
- [show pim interfaces on page 4024](#) in the Junos OS Operational Mode Commands
- [show pim neighbors on page 4036](#) in the Junos OS Operational Mode Commands
- [show pim source on page 4048](#) in the Junos OS Operational Mode Commands

## Modifying the Join State Timeout

This section describes how to configure the join state timeout.

A downstream router periodically sends join messages to refresh the join state on the upstream router. If the join state is not refreshed before the timeout expires, the join state is removed.

By default, the join state timeout is 210 seconds. You can change this timeout to allow additional time to receive the join messages. Because the messages are called join-prune messages, the name used is the **join-prune-timeout** statement.

To modify the timeout, include the **join-prune-timeout** statement:

```
user@host# set protocols pim join-prune-timeout 230
```

The join timeout value can be from 210 through 240 seconds.



Related Documentation • [join-prune-timeout on page 3824](#)

## Example: Enabling Join Suppression

This example describes how to enable PIM join suppression.

- [Requirements on page 3701](#)
- [Overview on page 3701](#)
- [Configuration on page 3703](#)
- [Verification on page 3704](#)

### Requirements

---

Before you begin:

- Configure the router interfaces. See the Junos® OS Network Interfaces.
- Configure an interior gateway protocol or static routing. See the Junos OS Routing Protocols Configuration Guide.
- Configure PIM Sparse Mode on the interfaces. See “[Enabling PIM Sparse Mode](#)” on [page 3696](#).

### Overview

---

PIM join suppression enables a router on a multiaccess network to defer sending join messages to an upstream router when it sees identical join messages on the same network. Eventually, only one router sends these join messages, and the other routers suppress identical messages. Limiting the number of join messages improves scalability and efficiency by reducing the number of messages sent to the same router.

This example includes the following statements:


- **override-interval**—Sets the maximum time in milliseconds to delay sending override join messages. When a router sees a prune message for a join it is currently suppressing, it waits before it sends an override join message. Waiting helps avoid multiple downstream routers sending override join messages at the same time. The override interval is a random timer with a value of 0 through the maximum override value.
- **propagation-delay**—Sets a value in milliseconds for a prune pending timer, which specifies how long to wait before executing a prune on an upstream router. During this period, the router waits for any prune override join messages that might be currently suppressed. The period for the prune pending timer is the sum of the **override-interval** value and the value specified for **propagation-delay**.
- **reset-tracking-bit**—Enables PIM join suppression on each multiaccess downstream interface. This statement resets a tracking bit field (T-bit) on the LAN prune delay hello option from the default of 1 (join suppression disabled) to 0 (join suppression enabled).

When multiple identical join messages are received, a random join suppression timer is activated, with a range of 66 through 84 milliseconds. The timer is reset each time join suppression is triggered.



Figure 135 on page 3702 shows the topology used in this example.

**Figure 135: Join Suppression**

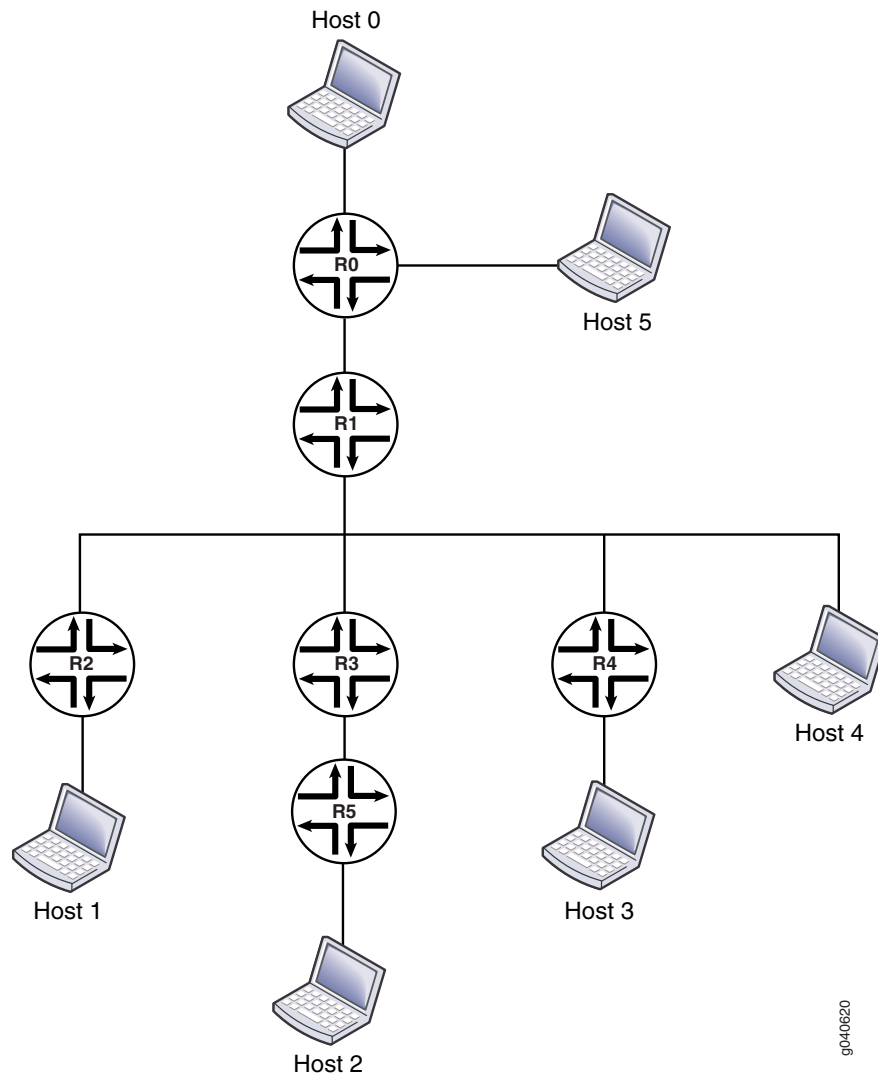

The items in the figure represent the following functions:

- Host 0 is the multicast source.
- Host 1, Host 2, Host 3, and Host 4 are receivers.
- Router R0 is the first-hop router and the RP.
- Router R1 is an upstream router.
- Routers R2, R3, R4, and R5 are downstream routers in the multicast LAN.

This example shows the configuration of the downstream devices: Routers R2, R3, R4, and R5.



## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
[edit]
set protocols pim traceoptions file pim.log
set protocols pim traceoptions file size 5m
set protocols pim traceoptions file world-readable
set protocols pim traceoptions flag join detail
set protocols pim traceoptions flag prune detail
set protocols pim traceoptions flag normal detail
set protocols pim traceoptions flag register detail
set protocols pim rp static address 10.255.112.160
set protocols pim interface all mode sparse
set protocols pim interface all version 2
set protocols pim interface fxp0.0 disable
set protocols pim reset-tracking-bit
set protocols pim propagation-delay 500
set protocols pim override-interval 4000
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure PIM join suppression on a non-RP downstream router in the multicast LAN:

1. Configure PIM sparse mode on the interfaces.

```
[edit]
user@host# edit protocols pim
[edit protocols pim]
user@host# set rp static address 10.255.112.160
[edit protocols pim]
user@host# set interface all mode sparse version 2
[edit protocols pim]
user@host# set interface all version 2
[edit protocols pim]
user@host# set interface fxp0.0 disable
```

2. Enable the join suppression timer.

```
[edit protocols pim]
user@host# set reset-tracking-bit
```

3. Configure the prune override interval value.

```
[edit protocols pim]
user@host# set override-interval 4000
```

4. Configure the propagation delay of the link.

```
[edit protocols pim]
user@host# set propagation-delay 500
```



5. (Optional) Configure PIM tracing operations.

```
[edit protocols pim]
user@host# set traceoptions file pim.log size 5m world-readable
[edit protocols pim]
user@host# set traceoptions flag join detail
[edit protocols pim]
user@host# set traceoptions flag normal detail
[edit protocols pim]
user@host# set traceoptions flag register detail
```

6. If you are done configuring the device, commit the configuration.

```
[edit protocols pim]
user@host# commit
```

### Results

From configuration mode, confirm your configuration by entering the **show protocols** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols
pim {
  traceoptions {
    file pim.log size 5m world-readable;
    flag join detail;
    flag prune detail;
    flag normal detail;
    flag register detail;
  }
  rp {
    static {
      address 10.255.112.160;
    }
  }
  interface all {
    mode sparse;
    version 2;
  }
  interface fxp0.0 {
    disable;
  }
  reset-tracking-bit;
  propagation-delay 500;
  override-interval 4000;
}
```

### Verification

---

To verify the configuration, run the following commands on the upstream and downstream routers:

- **show pim join extensive**
- **show multicast route extensive**



## Related Documentation

- [Example: Configuring the PIM Assert Timeout on page 3725](#)
- [Example: Configuring PIM RPF Selection](#)
- [Example: Configuring the PIM SPT Threshold Policy on page 3728](#)
- [Enabling PIM Sparse Mode on page 3696](#)
- [PIM Overview on page 3651](#)

## Static RP

- [Configuring Local PIM RPs on page 3705](#)
- [Configuring the Static PIM RP Address on the Non-RP Routing Device on page 3707](#)

### Configuring Local PIM RPs

Local RP configuration makes the routing device a statically defined RP. Consider statically defining an RP if the network does not have many different RPs defined or if the RP assignment does not change very often. The Junos IPv6 PIM implementation supports only static RP configuration. Automatic RP announcement and bootstrap routers are not available with IPv6.

You can configure a local RP globally or for a routing instance. This example shows how to configure a local RP in a routing instance for IPv4 or IPv6.

To configure the routing device's RP properties:

1. Configure the routing instance as the local RP.

```
[routing-instances VPN-A protocols pim]
user@host# set rp local
```

2. Configure the IP protocol family and IP address.

IPv6 PIM hello messages are sent to every interface on which you configure **family inet6**, whether at the PIM level of the hierarchy or not. As a result, if you configure an interface with both **family inet** at the **[edit interface *interface-name*]** hierarchy level and **family inet6** at the **[edit protocols pim interface *interface-name*]** hierarchy level, PIM sends both IPv4 and IPv6 hellos to that interface.

By default, PIM operates in sparse mode on an interface. If you explicitly configure sparse mode, PIM uses this setting for all IPv6 multicast groups. However, if you configure sparse-dense mode, PIM does not accept IPv6 multicast groups as dense groups and operates in sparse mode over them.

```
[edit routing-instances VPN-A protocols pim rp local]
user@host# set family inet6 address 2001:db8:85a3::8a2e:370:7334
user@host# set family inet address 10.1.2.254
```

3. (IPv4 only) Configure the routing device's RP priority.





**NOTE:** The priority statement is not supported for IPv6, but is included here for informational purposes. The routing device's priority value for becoming the RP is included in the bootstrap messages that the routing device sends. Use a smaller number to increase the likelihood that the routing device becomes the RP for local multicast groups. Each PIM routing device uses the priority value and other factors to determine the candidate RPs for a particular group range. After the set of candidate RPs is distributed, each routing device determines algorithmically the RP from the candidate RP set using a hash function. By default, the priority value is set to 1. If this value is set to 0, the bootstrap router can override the group range being advertised by the candidate RP.

```
[edit routing-instances VPN-A protocols pim rp local]
user@host# set priority 5
```

4. Configure the groups for which the routing device is the RP.

By default, a routing device running PIM is eligible to be the RP for all IPv4 or IPv6 groups (224.0.0.0/4 or FF70::/12 to FFF0::/12). The following example limits the groups for which this routing device can be the RP.

```
[edit routing-instances VPN-A protocols pim rp local]
user@host# set group-ranges fec0::/10
user@host# set group-ranges 10.1.2.0/24
```

5. (IPv4 only) Modify the local RP hold time.

If the local routing device is configured as an RP, it is considered a candidate RP for its local multicast groups. For candidate RPs, the hold time is used by the bootstrap router to time out RPs, and applies to the bootstrap RP-set mechanism. The RP hold time is part of the candidate RP advertisement message sent by the local routing device to the bootstrap router. If the bootstrap router does not receive a candidate RP advertisement from an RP within the hold time, it removes that routing device from its list of candidate RPs. The default hold time is 150 seconds.

```
[edit routing-instances VPN-A protocols pim rp local]
user@host# set hold-time 200
```

6. (Optional) Override dynamic RP for the specified group address range.

If you configure both static RP mapping and dynamic RP mapping (such as auto-RP) in a single routing instance, allow the static mapping to take precedence for the given static RP group range, and allow dynamic RP mapping for all other groups.

If you exclude this statement from the configuration and you use both static and dynamic RP mechanisms for different group ranges within the same routing instance, the dynamic RP mapping takes precedence over the static RP mapping, even if static RP is defined for a specific group range.

```
[edit routing-instances VPN-A protocols pim rp local]
user@host# set override
```

7. Monitor the operation of PIM by running the **show pim** commands. Run **show pim ?** to display the supported commands.



- Related Documentation**
- [PIM Overview on page 3651](#)
  - [Understanding MLD](#)

## Configuring the Static PIM RP Address on the Non-RP Routing Device

Consider statically defining an RP if the network does not have many different RPs defined or if the RP assignment does not change very often. The Junos IPv6 PIM implementation supports only static RP configuration. Automatic RP announcement and bootstrap routers are not available with IPv6.

You configure a static RP address on the non-RP routing device. This enables the non-RP routing device to recognize the local statically defined RP. For example, if R0 is a non-RP router and R1 is the local RP router, you configure R0 with the static RP address of R1. The static IP address is the routable address assigned to the loopback interface on R1. In the following example, the loopback address of the RP is 2001:db8:85a3::8a2e:370:7334.

You can configure a static RP address globally or for a routing instance. This example shows how to configure a static RP address in a routing instance for IPv6.

To configure the static RP address:

1. On a non-RP routing device, configure the routing instance to point to the routable address assigned to the loopback interface of the RP.

```
[routing-instances VPN-A protocols pim rp]
user@host# set static address 2001:db8:85a3::8a2e:370:7334
```



**NOTE:** Logical systems are also supported. You can configure a static RP address in a logical system only if the logical system is not directly connected to a source.

2. (Optional) Set the PIM sparse mode version.

For each static RP address, you can optionally specify the PIM version. The default PIM version is version 1.

```
[edit routing-instances VPN-A protocols pim rp]
user@host# set static address 2001:db8:85a3::8a2e:370:7334 version 2
```



**NOTE:** The default PIM version can be version 1 or version 2, depending on the mode you are configuring. PIM version 1 is the default for RP mode ([edit pim rp static address *address*]). PIM version 2 is the default for interface mode ([edit pim interface *interface-name*]). Explicitly configured versions override the defaults.

3. (Optional) Set the group address range.



By default, a routing device running PIM is eligible to be the RP for all IPv4 or IPv6 groups (224.0.0.0/4 or FF70::/12 to FFF0::/12). The following example limits the groups for which the 2001:db8:85a3::8a2e:370:7334 address can be the RP.

```
[edit routing-instances VPN-A protocols pim rp]
user@host# set static address 2001:db8:85a3::8a2e:370:7334 group-ranges fec0::/10
```

The RP that you select for a particular group must be consistent across all routers in a multicast domain.

4. (Optional) Override dynamic RP for the specified group address range.

If you configure both static RP mapping and dynamic RP mapping (such as auto-RP) in a single routing instance, allow the static mapping to take precedence for the given static RP group range, and allow dynamic RP mapping for all other groups.

If you exclude this statement from the configuration and you use both static and dynamic RP mechanisms for different group ranges within the same routing instance, the dynamic RP mapping takes precedence over the static RP mapping, even if static RP is defined for a specific group range.

```
[edit routing-instances VPN-A protocols pim rp static address
 2001:db8:85a3::8a2e:370:7334]
user@host# set override
```

5. Monitor the operation of PIM by running the **show pim** commands. Run **show pim ?** to display the supported commands.

- Related Documentation**
- [PIM Overview on page 3651](#)
  - [Understanding MLD](#)

---

## Anycast RP

---

- [Example: Configuring PIM Anycast With or Without MSDP on page 3708](#)
- [Configuring a PIM Anycast RP Router with MSDP on page 3712](#)
- [Configuring a PIM Anycast RP Router Using Only PIM on page 3713](#)
- [Configuring All PIM Anycast Non-RP Routers on page 3714](#)
- [Example: Configuring Multiple RPs in a Domain with Anycast RP on page 3714](#)

### Example: Configuring PIM Anycast With or Without MSDP

When you configure anycast RP, you bypass the restriction of having one active rendezvous point (RP) per multicast group, and instead deploy multiple RPs for the same group range. The RP routers share one unicast IP address. Sources from one RP are known to other RPs that use the Multicast Source Discovery Protocol (MSDP). Sources and receivers use the closest RP, as determined by the interior gateway protocol (IGP).

You can use anycast RP within a domain to provide redundancy and RP load sharing. When an RP stops operating, sources and receivers are taken to a new RP by means of unicast routing.



You can configure anycast RP to use PIM and MSDP for IPv4, or PIM alone for both IPv4 and IPv6 scenarios. Both are discussed in this section.

We recommend a static RP mapping with anycast RP over a bootstrap router and auto-RP configuration because it provides all the benefits of a bootstrap router and auto-RP without the complexity of the BSR and auto-RP mechanisms.

All systems on a subnet must run the same version of PIM.

The default PIM version can be version 1 or version 2, depending on the mode you are configuring. PIMv1 is the default RP mode (at the **[edit protocols pim rp static address address]** hierarchy level). However, PIMv2 is the default for interface mode (at the **[edit protocols pim interface interface-name]** hierarchy level). Explicitly configured versions override the defaults. This example explicitly configures PIMv2 on the interfaces.

The following example shows an anycast RP configuration for the RP routers, first with MSDP and then using PIM alone, and for non-RP routers.

1. For a network using an RP with MSDP, configure the RP using the **lo0** loopback interface, which is always up. Include the **address** statement and specify the unique and routable router ID and the RP address at the **[edit interfaces lo0 unit 0 family inet]** hierarchy level. In this example, the router ID is **198.58.3.254** and the shared RP address is **198.58.3.253**. Include the **primary** statement for the first address. Including the **primary** statement selects the router's primary address from all the preferred addresses on all interfaces.

```
interfaces {
  lo0 {
    description "PIM RP";
    unit 0 {
      family inet {
        address 198.58.3.254/32;
        primary;
        address 198.58.3.253/32;
      }
    }
  }
}
```

2. Specify the RP address. Include the **address** statement at the **[edit protocols pim rp local]** hierarchy level (the same address as the secondary **lo0** interface).

For all interfaces, include the **mode** statement to set the mode to **sparse** and the **version** statement to specify PIM version 2 at the **[edit protocols pim rp local interface all]** hierarchy level. When configuring all interfaces, exclude the **fxp0.0** management interface by including the **disable** statement for that interface.

```
protocols {
  pim {
    rp {
      local {
        family inet;
        address 198.58.3.253;
      }
      interface all {
```



```

        mode sparse;
        version 2;
    }
    interface fxp0.0 {
        disable;
    }
}
}

```

3. Configure MSDP peering. Include the **peer** statement to configure the address of the MSDP peer at the **[edit protocols msdp]** hierarchy level. For MSDP peering, use the unique, primary addresses instead of the anycast address. To specify the local address for MSDP peering, include the **local-address** statement at the **[edit protocols msdp peer]** hierarchy level.

```

protocols {
    msdp {
        peer 198.58.3.250 {
            local-address address 198.58.3.254;
        }
    }
}

```



**NOTE:** If you need to configure a PIM RP for both IPv4 and IPv6 scenarios, perform Step 4 and Step 5. Otherwise, go to Step 6.

4. Configure an RP using the **lo0** loopback interface, which is always up. Include the **address** statement to specify the unique and routable router address and the RP address at the **[edit interfaces lo0 unit 0 family inet]** hierarchy level. In this example, the router ID is **198.58.3.254** and the shared RP address is **198.58.3.253**. Include the **primary** statement on the first address. Including the **primary** statement selects the router's primary address from all the preferred addresses on all interfaces.

```

interfaces {
    lo0 {
        description "PIM RP";
        unit 0 {
            family inet {
                address 198.58.3.254/32 {
                    primary;
                }
                address 198.58.3.253/32;
            }
        }
    }
}

```

5. Include the **address** statement at the **[edit protocols pim rp local]** hierarchy level to specify the RP address (the same address as the secondary **lo0** interface).

For all interfaces, include the **mode** statement to set the mode to **sparse**, and the **version** statement to specify PIM version 2 at the **[edit protocols pim rp local interface**



**all]** hierarchy level. When configuring all interfaces, exclude the **fxp0.0** management interface by including the **disable** statement for that interface.

Include the **anycast-pim** statement to configure anycast RP without MSDP (for example, if IPv6 is used for multicasting). The other RP routers that share the same IP address are configured using the **rp-set** statement. There is one entry for each RP, and the maximum that can be configured is 15. For each RP, specify the routable IP address of the router and whether MSDP source active (SA) messages are forwarded to the RP.

MSDP configuration is not necessary for this type of IPv4 anycast RP configuration.

```
protocols {
  pim {
    rp {
      local {
        family inet {
          address 198.58.3.253;
          anycast-pim {
            rp-set {
              address 198.58.3.240;
              address 198.58.3.241 forward-msdp-sa;
            }
            local-address 198.58.3.254; #If not configured, use lo0 primary
          }
        }
      }
    }
  }
  interface all {
    mode sparse;
    version 2;
  }
  interface fxp0.0 {
    disable;
  }
}
```

6. Configure the non-RP routers. The anycast RP configuration for a non-RP router is the same whether MSDP is used or not. Specify a static RP by adding the address at the **[edit protocols pim rp static]** hierarchy level. Include the **version** statement at the **[edit protocols pim rp static address]** hierarchy level to specify PIM version 2.

```
protocols {
  pim {
    rp {
      static {
        address 198.58.3.253 {
          version 2;
        }
      }
    }
  }
}
```



7. Include the **mode** statement at the **[edit protocols pim interface all]** hierarchy level to specify sparse mode on all interfaces. Then include the **version** statement at the **[edit protocols pim rp interface all mode]** to configure all interfaces for PIM version 2. When configuring all interfaces, exclude the **fxp0.0** management interface by including the **disable** statement for that interface.

```
protocols {
  pim {
    interface all {
      mode sparse;
      version 2;
    }
    interface fxp0.0 {
      disable;
    }
  }
}
```

## Configuring a PIM Anycast RP Router with MSDP

Add the **address** statement at the **[edit protocols pim rp local]** hierarchy level to specify the RP address (the same address as the secondary **lo0** interface).

For all interfaces, use the **mode** statement to set the mode to **sparse** and the **version** statement to specify PIM version 2 at the **[edit protocols pim rp local interface all]** hierarchy level. When configuring all interfaces, exclude the **fxp0.0** management interface by adding the **disable** statement for that interface.

```
protocols {
  pim {
    rp {
      local {
        family inet;
        address 198.58.3.253;
      }
      interface all {
        mode sparse;
        version 2;
      }
      interface fxp0.0 {
        disable;
      }
    }
  }
}
```

To configure MSDP peering, add the **peer** statement to configure the address of the MSDP peer at the **[edit protocols msdp]** hierarchy level. For MSDP peering, use the unique, primary addresses instead of the anycast address. To specify the local address for MSDP peering, add the **local-address** statement at the **[edit protocols msdp peer]** hierarchy level.

```
protocols {
  msdp {
```



```

    peer 198.58.3.250 {
        local-address 198.58.3.254;
    }
}

```

## Configuring a PIM Anycast RP Router Using Only PIM

In this example, configure an RP using the **lo0** loopback interface, which is always up. Use the **address** statement to specify the unique and routable router address and the RP address at the **[edit interfaces lo0 unit 0 family inet]** hierarchy level. In this case, the router ID is 198.58.3.254/32 and the shared RP address is 198.58.3.253/32. Add the flag statement **primary** to the first address. Using this flag selects the router's primary address from all the preferred addresses on all interfaces.

```

interfaces {
    lo0 {
        description "PIM RP";
        unit 0 {
            family inet {
                address 198.58.3.254/32 {
                    primary;
                }
                address 198.58.3.253/32;
            }
        }
    }
}

```

Add the **address** statement at the **[edit protocols pim rp local]** hierarchy level to specify the RP address (the same address as the secondary **lo0** interface).

For all interfaces, use the **mode** statement to set the mode to **sparse**, and include the **version** statement to specify PIM version 2 at the **[edit protocols pim rp local interface all]** hierarchy level. When configuring all interfaces, exclude the **fxp0.0** management interface by adding the **disable** statement for that interface.

Use the **anycast-pim** statement to configure anycast RP without MSDP (for example, if IPv6 is used for multicasting). The other RP routers that share the same IP address are configured using the **rp-set** statement. There is one entry for each RP, and the maximum that can be configured is 15. For each RP, specify the routable IP address of the router and whether MSDP source active (SA) messages are forwarded to the RP.

```

protocols {
    pim {
        rp {
            local {
                family inet {
                    address 198.58.3.253;
                    anycast-pim {
                        rp-set {
                            address 198.58.3.240;
                            address 198.58.3.241 forward-msdp-sa;
                        }
                    }
                }
                local-address 198.58.3.254; #If not configured, use lo0 primary
            }
        }
    }
}

```



```
    }  
  }  
}  
interface all {  
  mode sparse;  
  version 2;  
}  
interface fxp0.0 {  
  disable;  
}  
}  
}
```

MSDP configuration is not necessary for this type of IPv4 anycast RP configuration.

## Configuring All PIM Anycast Non-RP Routers

Use the **mode** statement at the **[edit protocols pim rp interface all]** hierarchy level to specify sparse mode on all interfaces. Then add the **version** statement at the **[edit protocols pim rp interface all mode]** to configure all interfaces for PIM version 2. When configuring all interfaces, exclude the **fxp0.0** management interface by adding the **disable** statement for that interface.

```
protocols {  
  pim {  
    interface all {  
      mode sparse;  
      version 2;  
    }  
    interface fxp0.0 {  
      disable;  
    }  
  }  
}
```

## Example: Configuring Multiple RPs in a Domain with Anycast RP

This example shows how to configure anycast RP on each RP router in the PIM-SM domain. With this configuration you can deploy more than one RP for a single group range. This enables load balancing and redundancy.

- [Requirements on page 3714](#)
- [Overview on page 3715](#)
- [Configuration on page 3715](#)
- [Verification on page 3717](#)

---

### Requirements

Before you begin:

- Configure the router interfaces. See the Junos® OS Network Interfaces.
- Configure an interior gateway protocol or static routing. See the Junos OS Routing Protocols Configuration Guide.



- Configure PIM Sparse Mode on the interfaces. See [“Enabling PIM Sparse Mode” on page 3696](#).

## Overview

When you configure anycast RP, the RP routers in the PIM-SM domain use a shared address. In this example, the shared address is 10.1.1.2/32. Anycast RP uses Multicast Source Discovery Protocol (MSDP) to discover and maintain a consistent view of the active sources. Anycast RP also requires an RP selection method, such as static, auto-RP, or bootstrap RP. This example uses static RP and shows only one RP router configuration.

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**RP Routers**

```
set interfaces lo0 unit 0 family inet address 192.168.132.1/32 primary
set interfaces lo0 unit 0 family inet address 10.1.1.2/32
set protocols msdp local-address 192.168.132.1
set protocols msdp peer 192.168.12.1
set protocols pim rp local address 10.1.1.2
set routing-options router-id 192.168.132.1
```

**Non-RP Routers**      `set protocols pim rp static address 10.1.1.2`

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure anycast RP:

1. On each RP router in the domain, configure the shared anycast address on the router's loopback address.  
  

```
[edit interfaces]
user@host# set lo0 unit 0 family inet address 10.1.1.2/32
```
2. On each RP router in the domain, make sure that the router's regular loopback address is the primary address for the interface, and set the router ID.  
  

```
[edit interfaces]
user@host# set lo0 unit 0 family inet address 192.168.132.1/32 primary

[edit routing-options]
user@host# set router-id 192.168.132.1
```
3. On each RP router in the domain, configure the local RP address, using the shared address.  
  

```
[edit protocols pim]
user@host# set rp local address 10.1.1.2
```



4. On each RP router in the domain, create MSDP sessions to the other RPs in the domain.

```
[edit protocols msdp]
user@host# set local-address 192.168.132.1
user@host# set peer 192.168.12.1
```

5. On each non-RP router in the domain, configure a static RP address using the shared address.

```
[edit protocols pim]
user@host# set rp static address 10.1.1.2
```

6. If you are done configuring the devices, commit the configuration.

```
user@host# commit
```

### Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show interfaces
lo0 {
  unit 0 {
    family inet {
      address 192.168.132.1/32 {
        primary;
      }
      address 10.1.1.2/32;
    }
  }
}
```

*On the RP routers:*

```
user@host# show protocols
msdp {
  local-address 192.168.132.1;
  peer 192.168.12.1;
}
pim {
  rp {
    local {
      address 10.1.1.2;
    }
  }
}
```

*On the non-RP routers:*

```
user@host# show protocols
pim {
  rp {
    static {
      address 10.1.1.2;
    }
  }
}
```



```

    }
  }
}

user@host# show routing-options
router-id 192.168.132.1;

```

### Verification

To verify the configuration, run the `show pim rps extensive inet` command.

#### Related Documentation

- [Example: Configuring PIM Anycast With or Without MSDP on page 3708](#)
- [Understanding PIM Sparse Mode on page 3655](#)
- [Understanding RP Mapping with Anycast RP on page 3659](#)

## PIM Bootstrap Router

- [Configuring PIM Bootstrap Properties for IPv4 or IPv6 on page 3717](#)
- [Example: Rejecting PIM Bootstrap Messages at the Boundary of a PIM Domain on page 3718](#)
- [Example: Configuring PIM BSR Filters on page 3719](#)

### Configuring PIM Bootstrap Properties for IPv4 or IPv6

For correct operation, every multicast router within a PIM domain must be able to map a particular multicast group address to the same rendezvous point (RP). The bootstrap router mechanism is one way that a multicast router can learn the set of group-to-RP mappings. Bootstrap routers are supported in IPv4 and IPv6.

To determine which routing device is the RP, all routing devices within a PIM domain collect bootstrap messages. A PIM domain is a contiguous set of routing devices that implement PIM. All devices are configured to operate within a common boundary. The domain's bootstrap router initiates bootstrap messages, which are sent hop by hop within the domain. The routing devices use bootstrap messages to distribute RP information dynamically and to elect a bootstrap router when necessary.

You can configure bootstrap properties globally or for a routing instance. This example shows the global configuration.

To configure the bootstrap router properties:

1. Configure the bootstrap priority.

By default, each routing device has a bootstrap priority of 0, which means the routing device can never be the bootstrap router. The routing device with the highest priority value is elected to be the bootstrap router. In the case of a tie, the routing device with the highest IP address is elected to be the bootstrap router. A simple bootstrap configuration assigns a bootstrap priority value to a routing device.





**NOTE:** In the IPv4-only configuration, specifying a bootstrap priority of 0 disables the bootstrap function and does not cause the routing device to send BSR packets with a 0 in the priority field. In the combined IPv4 and IPv6 configuration, specifying a bootstrap priority of 0 does not disable the function, but causes the routing device to send BSR packets with a 0 in the priority field. To disable the bootstrap function in the IPv4 and IPv6 configuration, delete the **bootstrap** statement.

```
user@host# edit protocols pim rp
user@host# set bootstrap family inet priority 3
```

2. (Optional) Create import and export policies to control the flow of bootstrap messages to and from the RP, and apply the policies to PIM. Import and export policies are useful when some of the routers in your PIM domain have interfaces that connect to other PIM domains. Configuring a policy prevents bootstrap messages from crossing domain boundaries. The **import** statement prevents messages from being imported into the RP. The **export** statement prevents messages from being exported from the RP.

```
[edit protocols pim rp]
user@host# set bootstrap family inet import pim-bootstrap-import
user@host# set bootstrap family inet export pim-bootstrap-export
user@host# exit
```

3. Configure the policies.

```
user@host# edit policy-options policy-statement pim-bootstrap-import
[edit policy-options policy-statement pim-bootstrap-import]
user@host# set from interface se-0/0/0
user@host# set then reject
user@host# exit
user@host# edit policy-options policy-statement pim-bootstrap-export
user@host# set from interface se-0/0/0
user@host# set then reject
user@host# exit
```

4. Monitor the operation of PIM bootstrap routers by running the **show pim bootstrap** command.

#### Related Documentation

- [Understanding PIM Sparse Mode on page 3655](#)
- [Example: Rejecting PIM Bootstrap Messages at the Boundary of a PIM Domain on page 3718](#)
- [show pim bootstrap on page 4022](#) in the Junos OS Operational Mode Commands

### Example: Rejecting PIM Bootstrap Messages at the Boundary of a PIM Domain

In this example, the **from interface so-0-1/0 then reject** policy statement rejects bootstrap messages from the specified interface (the example is configured for both IPv4 and IPv6 operation):

```
protocols {
  pim {
```



```

rp {
  bootstrap {
    family inet {
      priority 1;
      import pim-import;
      export pim-export;
    }
    family inet6 {
      priority 1;
      import pim-import;
      export pim-export;
    }
  }
}
}
}
policy-options {
  policy-statement pim-import {
    from interface so-0/1/0;
    then reject;
  }
  policy-statement pim-export {
    to interface so-0/1/0;
    then reject;
  }
}
}

```

### Example: Configuring PIM BSR Filters

Configure a filter to prevent BSR messages from entering or leaving your network. Add this configuration to all routers:

```

protocols {
  pim {
    rp {
      bootstrap-import no-bsr;
      bootstrap-export no-bsr;
    }
  }
}
policy-options {
  policy-statement no-bsr {
    then reject;
  }
}
}

```

## PIM Filtering

- [Configuring Interface-Level PIM Neighbor Policies on page 3720](#)
- [Filtering Outgoing PIM Join Messages on page 3721](#)
- [Filtering Incoming PIM Join Messages on page 3722](#)
- [Configuring Register Message Filters on a PIM RP and DR on page 3723](#)



## Configuring Interface-Level PIM Neighbor Policies

You can configure a policy to filter unwanted PIM neighbors. In the following example, the PIM interface compares neighbor IP addresses with the IP address in the policy statement before any hello processing takes place. If any of the neighbor IP addresses (primary or secondary) match the IP address specified in the prefix list, PIM drops the hello packet and rejects the neighbor.

If you configure a PIM neighbor policy after PIM has already established a neighbor adjacency to an unwanted PIM neighbor, the adjacency remains intact until the neighbor hold time expires. When the unwanted neighbor sends another hello message to update its adjacency, the router recognizes the unwanted address and rejects the neighbor.

To configure a policy to filter unwanted PIM neighbors:

1. Configure the policy. The neighbor policy must be a properly structured policy statement that uses a prefix list (or a route filter) containing the neighbor primary address (or any secondary IP addresses) in a prefix list, and the **reject** option to reject the unwanted address.

```
[edit policy-options]
user@host# set prefix-list nbrGroup 1 20.20.20.1/32
user@host# set policy-statement nbr-policy from prefix-list nbrGroup1
user@host# set policy-statement nbr-policy then reject
```

2. Configure the interface globally or in the routing instance. This example shows the configuration for the routing instance.

```
[edit routing-instances PIM.master protocols pim]
user@host# set neighbor-policy nbr-policy
```

3. Verify the configuration by checking the **Hello dropped on neighbor policy** field in the output of the **show pim statistics** command.

### Related Documentation

- [Understanding PIM Sparse Mode on page 3655](#)
- [Defining Routing Policies in the Routing Policy Configuration Guide](#)
- [show pim statistics on page 4050](#) in the Junos OS Operational Mode Commands



## Filtering Outgoing PIM Join Messages

When the core of your network is using MPLS, PIM join and prune messages stop at the customer edge (CE) routers and are not forwarded toward the core, because these routers do not have PIM neighbors on the core-facing interfaces. When the core of your network is using IP, PIM join and prune messages are forwarded to the upstream PIM neighbors in the core of the network.

When the core of your network is using a mix of IP and MPLS, you might want to filter certain PIM join and prune messages at the upstream egress interface of the CE routers.

You can filter PIM sparse mode (PIM-SM) join and prune messages at the egress interfaces for IPv4 and IPv6 in the upstream direction. The messages can be filtered based on the group address, source address, outgoing interface, PIM neighbor, or a combination of these values. If the filter is removed, the join is sent after the PIM periodic join timer expires.

To filter PIM sparse mode join and prune messages at the egress interfaces, create a policy rejecting the group address, source address, outgoing interface, or PIM neighbor, and then apply the policy.

The following example filters PIM join and prune messages for group addresses 224.0.1.2 and 225.1.1.1.

1. In configuration mode, create the policy.

```
user@host# set policy-options policy-statement block-groups term t1 from route-filter
224.0.1.2/32 exact
user@host# set policy-options policy-statement block-groups term t1 from route-filter
225.1.1.1/32 exact
user@host# set policy-options policy-statement block-groups term t1 then reject
user@host# set policy-options policy-statement block-groups term last then accept
```

2. Verify the policy configuration by running the **show policy-options** command.

```
user@host# show policy-options
policy-statement block-groups {
  term t1 {
    from {
      route-filter 224.0.1.2/32 exact;
      route-filter 225.1.1.1/32 exact;
      then reject;
    }
    term last {
      then accept;
    }
  }
}
```

3. Apply the PIM join and prune message filter.

```
user@host> set protocols pim export block-groups
```

4. After the configuration is committed, use the **show pim statistics** command to verify that outgoing PIM join and prune messages are being filtered.

```
user@host> show pim statistics | grep filtered
```



|                          |     |
|--------------------------|-----|
| RP Filtered Source       | 0   |
| Rx Joins/Prunes filtered | 0   |
| Tx Joins/Prunes filtered | 254 |

The egress filter count is shown on the **Tx Joins/Prunes filtered** line.

**Related Documentation**

- [Filtering Incoming PIM Join Messages on page 3722](#)

## Filtering Incoming PIM Join Messages

Multicast scoping controls the propagation of multicast messages. Whereas multicast scoping prevents the actual multicast data packets from flowing in or out of an interface, PIM join filters prevent a state from being created in a router. A state—the (\*G) or (S,G) entries—is the information used for forwarding unicast or multicast packets. Using PIM join filters prevents the transport of multicast traffic across a network and the dropping of packets at a scope at the edge of the network. Also, PIM join filters reduce the potential for denial-of-service (DoS) attacks and PIM state explosion—large numbers of PIM join messages forwarded to each router on the rendezvous-point tree (RPT), resulting in memory consumption.

To use PIM join filters to efficiently restrict multicast traffic from certain source addresses, create and apply the routing policy across all routers in the network.

See [Table 239 on page 3722](#) for a list of match conditions.

**Table 239: PIM Join Filter Match Conditions**

| Match Condition              | Matches On                                                                           |
|------------------------------|--------------------------------------------------------------------------------------|
| <b>interface</b>             | Router interface or interfaces specified by name or IP address                       |
| <b>neighbor</b>              | Neighbor address (the source address in the IP header of the join and prune message) |
| <b>route-filter</b>          | Multicast group address embedded in the join and prune message                       |
| <b>source-address-filter</b> | Multicast source address embedded in the join and prune message                      |

The following example shows how to create a PIM join filter. The filter is composed of a route filter and a source address filter—**bad-groups** and **bad-sources**, respectively. the **bad-groups** filter prevents (\*G) or (S,G) join messages from being received for all groups listed. The **bad-sources** filter prevents (S,G) join messages from being received for all sources listed. The **bad-groups** filter and **bad-sources** filter are in two different terms. If route filters and source address filters are in the same term, they are logically ANDed.

To filter incoming PIM join messages:

1. Configure the policy.

[edit [policy-statement](#) pim-join-filter term bad-groups]



```

user@host# set from route-filter 224.0.1.2/32 exact
user@host# set from route-filter 239.0.0.0/8 orlonger
user@host# set then reject

[edit policy-statement pim-join-filter term bad-sources]
user@host# set from source-address-filter 10.0.0.0/8 orlonger
user@host# set from source-address-filter 127.0.0.0/8 orlonger
user@host# set then reject

[edit policy-statement pim-join-filter term last]
user@host# set then accept

```

2. Apply one or more policies to routes being imported into the routing table from PIM.

```

[edit protocols pim]
user@host# set import pim-join-filter

```

3. Verify the configuration by checking the output of the **show pim join** and **show policy** commands.

#### Related Documentation

- Understanding Multicast Administrative Scoping
- [Filtering Outgoing PIM Join Messages on page 3721](#)
- [show pim join on page 4027](#) in the Junos OS Operational Mode Commands
- show policy in the Junos OS Operational Mode Commands

## Configuring Register Message Filters on a PIM RP and DR

PIM register messages are sent to the rendezvous point (RP) by a designated router (DR). When a source for a group starts transmitting, the DR sends unicast PIM register packets to the RP.

Register messages have the following purposes:

- Notify the RP that a source is sending to a group.
- Deliver the initial multicast packets sent by the source to the RP for delivery down the shortest-path tree (SPT).

The PIM RP keeps track of all active sources in a single PIM sparse mode domain. In some cases, you want more control over which sources an RP discovers, or which sources a DR notifies other RPs about. A high degree of control over PIM register messages is provided by RP or DR register message filtering. Message filtering prevents unauthorized groups and sources from registering with an RP router.

You configure RP or DR register message filtering to control the number and location of multicast sources that an RP discovers. You can apply register message filters on a DR to control outgoing register messages, or apply them on an RP to control incoming register messages.

When anycast RP is configured, all RPs in the anycast RP set need to be configured with the same register message filtering policy.



You can configure message filtering globally or for a routing instance. These examples show the global configuration.

To configure an RP filter to drop the register packets for multicast group range 224.1.1.0/24 from source address 10.10.94.2:

1. On the RP, configure the policy.

```
[edit policy-options policy-statement incoming-policy-for-rp from]
user@host# set route-filter 224.1.1.0/24 orlonger
user@host# set source-address-filter 10.10.94.2/32 exact
user@host# set then reject
user@host# exit
```

2. Apply the policy to the RP.

```
[edit protocols pim rp]
user@host# set rp-register-policy incoming-policy-for-rp
user@host# set local address 10.10.10.5
user@host# exit
```

To configure a DR filter to prevent sending register packets for group range 224.1.1.0/24 and source address 10.10.10.1/32:

1. On the DR, configure the policy.

```
[edit policy-options policy-statement outgoing-policy-for-rp]
user@host# set from route-filter 224.1.1.0/24 orlonger
user@host# set from source-address-filter 10.10.10.1/32 exact
user@host# set then reject
user@host# exit
```

2. Apply the policy to the DR.

The static address is the address of the RP to which you do not want the DR to send the filtered register messages.

```
[edit protocols pim rp]
user@host# set dr-register-policy outgoing-policy-for-dr
user@host# set static 10.10.10.3
user@host# exit
```

To configure a policy expression to accept register messages for multicast group 224.1.1.5 but reject those for 224.1.1.1:

1. On the RP, configure the policies.

```
[edit policy-options policy-statement reject_224_1_1_1]
user@host# set from route-filter 224.1.1.0/24 orlonger
user@host# set from source-address-filter 10.10.94.2/32 exact
user@host# set then reject
user@host# exit
```

```
[edit policy-options policy-statement accept_224_1_1_5]
user@host# set term one from route-filter 224.1.1.5/32 exact
user@host# set term one from source-address-filter 10.10.94.2/32 exact
user@host# set term one then accept
user@host# set term two then reject
user@host# exit
```



2. Apply the policies to the RP.

```
[edit protocols pim rp]
user@host# set rp-register-policy [ reject_224_1_1_1 | accept_224_1_1_5 ]
user@host# set local address 10.10.10.5
```

To monitor the operation of the filters, run the **show pim statistics** command. The command output contains the following fields related to filtering:

- RP Filtered Source
- Rx Joins/Prunes filtered
- Tx Joins/Prunes filtered
- Rx Register msgs filtering drop
- Tx Register msgs filtering drop

#### Related Documentation

- [PIM Sparse Mode Source Registration on page 3664](#)
- [Filtering RP and DR Register Messages on page 3661](#)
- [show pim statistics on page 4050](#) in the Junos OS Operational Mode Commands

## PIM RPT and SPT Cutover

- [Example: Configuring the PIM Assert Timeout on page 3725](#)
- [Example: Configuring the PIM SPT Threshold Policy on page 3728](#)

### Example: Configuring the PIM Assert Timeout

This example shows how to configure the timeout period for a PIM assert forwarder.

- [Requirements on page 3725](#)
- [Overview on page 3726](#)
- [Configuration on page 3727](#)

#### Requirements

Before you begin:

- Configure the router interfaces. See the Junos® OS Network Interfaces.
- Configure an interior gateway protocol or static routing. See the Junos OS Routing Protocols Configuration Guide.
- Configure PIM Sparse Mode on the interfaces. See [“Enabling PIM Sparse Mode” on page 3696](#).



## Overview

---

The role of PIM assert messages is to determine the forwarder on a network with multiple routers. The forwarder is the router that forwards multicast packets to a network with multicast group members. The forwarder is generally the same as the PIM DR.

A router sends an assert message when it receives a multicast packet on an interface that is listed in the outgoing interface list of the matching routing entry. Receiving a message on an outgoing interface is an indication that more than one router forwards the same multicast packets to a network.

In [Figure 136 on page 3727](#), both routing devices R1 and R2 forward multicast packets for the same (S,G) entry on a network. Both devices detect this situation and both devices send assert messages on the Ethernet network. An assert message contains, in addition to a source address and group address, a unicast cost metric for sending packets to the source, and a preference metric for the unicast cost. The preference metric expresses a preference between unicast routing protocols. The routing device with the smallest preference metric becomes the forwarder (also called the assert winner). If the preference metrics are equal, the device that sent the lowest unicast cost metric becomes the forwarder. If the unicast metrics are also equal, the routing device with the highest IP address becomes the forwarder. After the transmission of assert messages, only the forwarder continues to forward messages on the network.

When an assert message is received and the RPF neighbor is changed to the assert winner, the assert timer is set to an assert timeout period. The assert timeout period is restarted every time a subsequent assert message for the route entry is received on the incoming interface. When the assert timer expires, the routing device resets its RPF neighbor according to its unicast routing table. Then, if multiple forwarders still exist, the forwarders reenter the assert message cycle. In effect, the assert timeout period determines how often multicast routing devices enter a PIM assert message cycle.


The range is from 5 through 210 seconds. The default is 180 seconds.

Assert messages are useful for LANs that connect multiple routing devices and no hosts.

[Figure 136 on page 3727](#) shows the topology for this example.



Figure 136: PIM Assert Topology

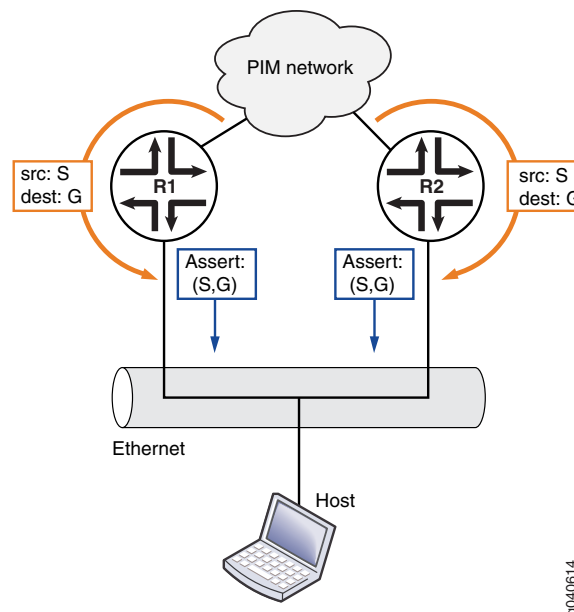

### Configuration

#### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the CLI User Guide*.

To configure an assert timeout:

1. Configure the timeout period, in seconds.
 

```
[edit protocols pim]
user@host# set assert-timeout 60
```
2. (Optional) Trace assert messages.
 

```
[edit protocols pim]
user@host# set traceoptions file PIM.log
user@host# set traceoptions flag assert detail
```
3. If you are done configuring the device, commit the configuration.
 

```
user@host# commit
```
4. To verify the configuration, run the following commands:
  - `show pim join`
  - `show pim statistics`

#### Related Documentation

- [Configuring PIM Trace Options on page 3690](#)
- [SPT Cutover on page 3668](#)
- [SPT Cutover Control on page 3671](#)



## Example: Configuring the PIM SPT Threshold Policy

This example shows how to apply a policy that suppresses the transition from the rendezvous-point tree (RPT) rooted at the RP to the shortest-path tree (SPT) rooted at the source.

- [Requirements on page 3728](#)
- [Overview on page 3728](#)
- [Configuration on page 3729](#)
- [Verification on page 3731](#)

---

### Requirements

Before you begin:

- Configure the router interfaces. See the Junos® OS Network Interfaces.
- Configure an interior gateway protocol or static routing. See the Junos OS Routing Protocols Configuration Guide.
- Configure PIM Sparse Mode on the interfaces. See [“Enabling PIM Sparse Mode” on page 3696](#).

---

### Overview

Multicast routing devices running PIM sparse mode can forward the same stream of multicast packets onto the same LAN through an RPT rooted at the RP or through an SPT rooted at the source. In some cases, the last-hop routing device needs to stay on the shared RPT to the RP and not transition to a direct SPT to the source. Receiving the multicast data traffic on SPT is optimal but introduces more state in the network, which might not be desirable in some multicast deployments. Ideally, low-bandwidth multicast streams can be forwarded on the SPT, and high-bandwidth streams can use the SPT. This example shows how to configure such a policy.

This example includes the following settings:

- **spt-threshold**—Enables you to configure an SPT threshold policy on the last-hop routing device to control the transition to a direct SPT. When you include this statement in the main PIM instance, the PE router stays on the RPT for control traffic.
- **infinity**—Applies an SPT cutover threshold of infinity to a source-group address pair, so that the last-hop routing device never transitions to a direct SPT. For all other source-group address pairs, the last-hop routing device transitions immediately to a direct SPT rooted at the source DR. This statement must reference a properly configured policy to set the SPT cutover threshold for a particular source-group pair to infinity. The use of values other than infinity for the SPT threshold is not supported. You can configure more than one policy.
- **policy-statement**—Configures the policy. The simplest type of SPT threshold policy uses a route filter and source address filter to specify the multicast group and source addresses and to set the SPT threshold for that pair of addresses to infinity. The policy is applied to the main PIM instance.



This example sets the SPT transition value for the source-group pair 10.10.10.1 and 224.1.1.1 to infinity. When the policy is applied to the last-hop router, multicast traffic from this source-group pair never transitions to a direct SPT to the source. Traffic will continue to arrive through the RP. However, traffic for any other source-group address combination at this router transitions to a direct SPT to the source.

Note these points when configuring the SPT threshold policy:

- Configuration changes to the SPT threshold policy affect how the routing device handles the SPT transition.

Note these points when configuring the SPT threshold policy:

- Configuration changes to the SPT threshold policy affect how the routing device handles the SPT transition.

Note these points when configuring the SPT threshold policy:

- Configuration changes to the SPT threshold policy affect how the routing device handles the SPT transition.
- When the policy is configured for the first time, the routing device continues to transition to the direct SPT for the source-group address pair until the PIM-join state is cleared with the **clear pim join** command.
- If you do not clear the PIM-join state when you apply the infinity policy configuration for the first time, you must apply it before the PE router is brought up.
- When the policy is deleted for a source-group address pair for the first time, the routing device does not transition to the direct SPT for that source-group address pair until the PIM-join state is cleared with the **clear pim join** command.
- When the policy is changed for a source-group address pair for the first time, the routing device does not use the new policy until the PIM-join state is cleared with the **clear pim join** command.

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
[edit]
set policy-options policy-statement spt-infinity-policy term one from route-filter
  224.1.1.1/32 exact
set policy-options policy-statement spt-infinity-policy term one from source-address-filter
  10.10.10.1/32 exact
set policy-options policy-statement spt-infinity-policy term one then accept
set policy-options policy-statement spt-infinity-policy term two then reject
set protocols pim spt-threshold infinity spt-infinity-policy
```



**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see the CLI User Guide.

To configure an SPT threshold policy:

1. Apply the policy.

```
[edit]
user@host# edit protocols pim
[edit protocols pim]
user@host# set spt-threshold infinity spt-infinity-policy
[edit protocols pim]
user@host# exit
```

2. Configure the policy.

```
[edit]
user@host# edit policy-options policy-statement spt-infinity-policy
[edit policy-options policy-statement spt-infinity-policy]
user@host# set term one from route-filter 224.1.1.1/32 exact
[edit policy-options policy-statement spt-infinity-policy]
user@host# set term one from source-address-filter 10.10.10.1/32 exact
[edit policy-options policy-statement spt-infinity-policy]
user@host# set term one then accept
[edit policy-options policy-statement spt-infinity-policy]
user@host# set term two then reject
[edit policy-options policy-statement spt-infinity-policy]
user@host# exit
policy-statement {
```

3. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

4. Clear the PIM join cache to force the configuration to take effect.

```
[edit]
user@host# run clear pim join
```

### Results

Confirm your configuration by entering the **show policy-options** command and the **show protocols** command from configuration mode. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show policy-options
policy-statement spt-infinity-policy {
  term one {
    from {
      route-filter 224.1.1.1/32 exact;
      source-address-filter 10.10.10.1/32 exact;
    }
    then accept;
  }
  term two {
    then reject;
  }
}
```



```

    }
  }

user@host# show protocols
pim {
  spt-threshold {
    infinity spt-infinity-policy;
  }
}

```

### Verification

To verify the configuration, run the `show pim join` command.

**Related Documentation**

- [SPT Cutover Control on page 3671](#)

## PIM and the BFD Protocol

- [Configuring BFD for PIM on page 3731](#)
- [Configuring BFD Authentication for PIM on page 3733](#)

### Configuring BFD for PIM

The Bidirectional Forwarding Detection (BFD) Protocol is a simple hello mechanism that detects failures in a network. BFD works with a wide variety of network environments and topologies. A pair of routing devices exchanges BFD packets. Hello packets are sent at a specified, regular interval. A neighbor failure is detected when the routing device stops receiving a reply after a specified interval. The BFD failure detection timers have shorter time limits than the Protocol Independent Multicast (PIM) hello hold time, so they provide faster detection.

The BFD failure detection timers are adaptive and can be adjusted to be faster or slower. The lower the BFD failure detection timer value, the faster the failure detection and vice versa. For example, the timers can adapt to a higher value if the adjacency fails (that is, the timer detects failures more slowly). Or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. A back-off algorithm increases the receive (Rx) interval by two if the local BFD instance is the reason for the session flap. The transmission (Tx) interval is increased by two if the remote BFD instance is the reason for the session flap. You can use the `clear bfd adaptation` command to return BFD interval timers to their configured values. The `clear bfd adaptation` command is hitless, meaning that the command does not affect traffic flow on the routing device.

You must specify the minimum transmit and minimum receive intervals to enable BFD on PIM.

To enable failure detection:

1. Configure the interface globally or in a routing instance.

This example shows the global configuration.



```
[edit protocols pim]
user@host# edit interface fe-1/0/0.0 bfd-liveness-detection
```

2. Configure the minimum transmit interval.

This is the minimum interval after which the routing device transmits hello packets to a neighbor with which it has established a BFD session. Specifying an interval smaller than 300 ms can cause undesired BFD flapping.

```
[edit protocols pim interface fe-1/0/0.0 bfd-liveness-detection]
user@host# set transmit-interval 350
```

3. Configure the minimum interval after which the routing device expects to receive a reply from a neighbor with which it has established a BFD session.

Specifying an interval smaller than 300 ms can cause undesired BFD flapping.

```
[edit protocols pim interface fe-1/0/0.0 family inet bfd-liveness-detection]
user@host# set minimum-receive-interval 350
```

4. (Optional) Configure other BFD settings.

As an alternative to setting the receive and transmit intervals separately, configure one interval for both.

```
[edit protocols pim interface fe-1/0/0.0 bfd-liveness-detection]
user@host# set minimum-interval 350
```

5. Configure the threshold for the adaptation of the BFD session detection time.

When the detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.

```
[edit protocols pim interface fe-1/0/0.0 bfd-liveness-detection]
user@host# set detection-time threshold 800
```

6. Configure the number of hello packets not received by a neighbor that causes the originating interface to be declared down.

```
[edit protocols pim interface fe-1/0/0.0 bfd-liveness-detection]
user@host# set multiplier 50
```

7. Configure the BFD version.

```
[edit protocols pim interface fe-1/0/0.0 bfd-liveness-detection]
user@host# set version 1
```

8. Specify that BFD sessions should not adapt to changing network conditions.

We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation enabled in your network.

```
[edit protocols pim interface fe-1/0/0.0 bfd-liveness-detection]
user@host# set no-adaptation
```

9. Verify the configuration by checking the output of the **show bfd session** command.

#### Related Documentation

- show bfd session in the Junos OS Operational Mode Commands



## Configuring BFD Authentication for PIM

Beginning with Junos OS Release 9.6, you can configure authentication for Bidirectional Forwarding Detection (BFD) sessions running over Protocol Independent Multicast (PIM). Routing instances are also supported. The following steps are needed to configure authentication on a BFD session:

1. Specify the BFD authentication algorithm for the PIM protocol.
2. Associate the authentication keychain with the PIM protocol.
3. Configure the related security authentication keychain.

The following sections provide instructions for configuring and viewing BFD authentication on PIM:

- [Configuring BFD Authentication Parameters on page 3733](#)
- [Viewing Authentication Information for BFD Sessions on page 3734](#)

### Configuring BFD Authentication Parameters

BFD authentication is only supported in the Canada and United States version of the Junos OS image and is not available in the export version.

To configure BFD authentication:

1. Specify the algorithm (**keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, **meticulous-keyed-sha-1**, or **simple-password**) to use for BFD authentication on a PIM route or routing instance.

```
[edit protocols pim]
user@host# set interface if3-pim bfd-liveness-detection authentication algorithm
keyed-sha-1
```



**NOTE:** Nonstop active routing (NSR) is not supported with the **meticulous-keyed-md5** and **meticulous-keyed-sha-1** authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

2. Specify the keychain to be used to associate BFD sessions on the specified PIM route or routing instance with the unique security authentication keychain attributes.

The keychain you specify must match the keychain name configured at the **[edit security authentication key-chains]** hierarchy level.

```
[edit protocols pim]
user@host# set interface if3-pim bfd-liveness-detection authentication keychain
bfd-pim
```





**NOTE:** The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.

3. Specify the unique security authentication information for BFD sessions:

- The matching keychain name as specified in Step 2.
- At least one key, a unique integer between 0 and 63. Creating multiple keys allows multiple clients to use the BFD session.
- The secret data used to allow access to the session.
- The time at which the authentication key becomes active, in the format *yyyy-mm-dd.hh:mm:ss*.

[edit security]

```
user@host# set authentication-key-chains key-chain bfd-pim key 53 secret
$9$ggaJDmPQ6/tJgF/AtREVsyPsnCtUHM start-time 2009-06-14.10:00:00
```

4. (Optional) Specify loose authentication checking if you are transitioning from nonauthenticated sessions to authenticated sessions.

[edit protocols pim]

```
user@host# set interface if3-pim bfd-liveness-detection authentication loose-check
```

5. (Optional) View your configuration by using the **show bfd session detail** or **show bfd session extensive** command.

6. Repeat these steps to configure the other end of the BFD session.

### Viewing Authentication Information for BFD Sessions

You can view the existing BFD authentication configuration by using the **show bfd session detail** and **show bfd session extensive** commands.

The following example shows BFD authentication configured for the **if3-pim** BGP group. It specifies the keyed SHA-1 authentication algorithm and a keychain name of **bfd-pim**. The authentication keychain is configured with two keys. Key 1 contains the secret data “\$9\$ggaJDmPQ6/tJgF/AtREVsyPsnCtUHM” and a start time of June 1, 2009, at 9:46:02 AM PST. Key 2 contains the secret data “\$9\$a5jiKW9L.reP38ny.TszF2/9” and a start time of June 1, 2009, at 3:29:20 PM PST.

[edit protocols pim]

```
interface if3-pim {
  bfd-liveness-detection {
    authentication {
      algorithm keyed-sha-1;
      key-chain bfd-pim;
    }
  }
}
```

[edit security]

```
authentication key-chains {
```



```

key-chain bfd-pim {
  key 1 {
    secret "$9$ggaJDmPQ6/tJgF/AtREVsyPsnCtUHm";
    start-time "2009-6-1.09:46:02 -0700";
  }
  key 2 {
    secret "$9$a5jiKW9l.reP38ny.TszF2/9";
    start-time "2009-6-1.15:29:20 -0700";
  }
}

```

If you commit these updates to your configuration, you see output similar to the following example. In the output for the **show bfd session detail** command, **Authenticate** is displayed to indicate that BFD authentication is configured. For more information about the configuration, use the **show bfd session extensive** command. The output for this command provides the keychain name, the authentication algorithm and mode for each client in the session, and the overall BFD authentication configuration status, keychain name, and authentication algorithm and mode.

#### show bfd session detail

```
user@host# show bfd session detail
```

| Address  | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|----------|-------|------------|-------------|-------------------|------------|
| 50.0.0.2 | Up    | ge-0/1/5.0 | 0.900       | 0.300             | 3          |

Client PIM, TX interval 0.300, RX interval 0.300, **Authenticate**  
 Session up time 3d 00:34  
 Local diagnostic None, remote diagnostic NbrSignal  
 Remote state Up, version 1  
 Replicated

#### show bfd session extensive

```
user@host# show bfd session extensive
```

| Address  | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|----------|-------|------------|-------------|-------------------|------------|
| 50.0.0.2 | Up    | ge-0/1/5.0 | 0.900       | 0.300             | 3          |

Client PIM, TX interval 0.300, RX interval 0.300, **Authenticate**  
**keychain bfd-pim, algo keyed-sha-1, mode strict**  
 Session up time 00:04:42  
 Local diagnostic None, remote diagnostic NbrSignal  
 Remote state Up, version 1  
 Replicated  
 Min async interval 0.300, min slow interval 1.000  
 Adaptive async TX interval 0.300, RX interval 0.300  
 Local min TX interval 0.300, minimum RX interval 0.300, multiplier 3  
 Remote min TX interval 0.300, min RX interval 0.300, multiplier 3  
 Local discriminator 2, remote discriminator 2  
 Echo mode disabled/inactive  
**Authentication enabled/active, keychain bfd-pim, algo keyed-sha-1, mode strict**

#### Related Documentation

- Understanding Bidirectional Forwarding Detection Authentication for PIM
- [Configuring BFD for PIM on page 3731](#)
- [authentication-key-chains on page 4344](#)
- [bfd-liveness-detection on page 3802](#)



- [show bfd session in the Junos OS Operational Mode Commands](#)

---

## IGMP

- [Configuring IGMP on page 3736](#)
- [Enabling IGMP on page 3738](#)
- [Changing the IGMP Version on page 3739](#)
- [Modifying the IGMP Host-Query Message Interval on page 3739](#)
- [Modifying the IGMP Last-Member Query Interval on page 3740](#)
- [Specifying Immediate-Leave Host Removal for IGMP on page 3741](#)
- [Filtering Unwanted IGMP Reports at the IGMP Interface Level on page 3742](#)
- [Accepting IGMP Messages from Remote Subnetworks on page 3743](#)
- [Modifying the IGMP Query Response Interval on page 3744](#)
- [Modifying the IGMP Robustness Variable on page 3745](#)
- [Limiting the Maximum IGMP Message Rate on page 3746](#)
- [Enabling IGMP Static Group Membership on page 3746](#)
- [Recording IGMP Join and Leave Events on page 3753](#)
- [Limiting the Number of IGMP Multicast Group Joins on Logical Interfaces on page 3754](#)
- [Tracing IGMP Protocol Traffic on page 3755](#)
- [Disabling IGMP on page 3757](#)

## Configuring IGMP

Before you begin:

1. Determine whether the router is directly attached to any multicast sources. Receivers must be able to locate these sources.
2. Determine whether the router is directly attached to any multicast group receivers. If receivers are present, IGMP is needed.
3. Determine whether to configure multicast to use sparse, dense, or sparse-dense mode. Each mode has different configuration considerations.
4. Determine the address of the RP if sparse or sparse-dense mode is used.
5. Determine whether to locate the RP with the static configuration, BSR, or auto-RP method.
6. Determine whether to configure multicast to use its own RPF routing table when configuring PIM in sparse, dense, or sparse-dense mode.
7. Configure the SAP and SDP protocols to listen for multicast session announcements. See [Configuring the Session Announcement Protocol](#).

To configure the Internet Group Management Protocol (IGMP), include the **igmp** statement:



```

igmp {
  accounting;
  interface interface-name {
    disable;
    (accounting | no-accounting);
    group-policy [ policy-names ];
    immediate-leave;
    oif-map map-name;
    promiscuous-mode;
    ssm-map ssm-map-name;
    static {
      group multicast-group-address {
        exclude;
        group-count number;
        group-increment increment;
        source ip-address {
          source-count number;
          source-increment increment;
        }
      }
    }
  }
  version version;
}
query-interval seconds;
query-last-member-interval seconds;
query-response-interval seconds;
robust-count number;
traceoptions {
  file filename <files number> <size size> <world-readable | no-world-readable>;
  flag flag <flag-modifier> <disable>;
}
}

```

You can include this statement at the following hierarchy levels:

- [edit protocols]
- [edit logical-systems *logical-system-name* protocols]

By default, IGMP is enabled on all interfaces on which you configure Protocol Independent Multicast (PIM), and on all broadcast interfaces on which you configure the Distance Vector Multicast Routing Protocol (DVMRP).



**NOTE:** You can configure IGMP on an interface without configuring PIM. PIM is generally not needed on IGMP downstream interfaces. Therefore, only one “pseudo PIM interface” is created to represent all IGMP downstream (IGMP-only) interfaces on the router. This reduces the amount of router resources, such as memory, that are consumed. You must configure PIM on upstream IGMP interfaces to enable multicast routing, perform reverse-path forwarding for multicast data packets, populate the multicast forwarding table for upstream interfaces, and in the case of bidirectional PIM and PIM sparse mode, to distribute IGMP group memberships into the multicast routing domain.



## Enabling IGMP

The Internet Group Management Protocol (IGMP) manages multicast groups by establishing, maintaining, and removing groups on a subnet. Multicast routing devices use IGMP to learn which groups have members on each of their attached physical networks. IGMP must be enabled for the router to receive IPv4 multicast packets. IGMP is only needed for IPv4 networks, because multicast is handled differently in IPv6 networks. IGMP is automatically enabled on all IPv4 interfaces on which you configure PIM and on all IPv4 broadcast interfaces when you configure DVMRP.

If IGMP is not running on an interface—either because PIM and DVMRP are not configured on the interface or because IGMP is explicitly disabled on the interface—you can explicitly enable IGMP.

To explicitly enable IGMP:

1. If PIM and DVMRP are not running on the interface, explicitly enable IGMP by including the interface name.

```
[edit protocols igmp]
user@host# set interface fe-0/0/0.0
```

2. See if IGMP is disabled on any interfaces. In the following example, IGMP is disabled on a Gigabit Ethernet interface.

```
[edit protocols igmp]
user@host# show
interface fe-0/0/0.0;
interface ge-1/0/0.0 {
  disable;
}
```

3. Enable IGMP on the interface by deleting the **disable** statement.

```
[edit protocols igmp]
delete interface ge-1/0/0.0 disable
```

4. Verify the configuration.

```
[edit protocols igmp]
user@host# show
interface fe-0/0/0.0;
interface ge-1/0/0.0;
```

5. Verify the operation of IGMP on the interfaces by checking the output of the **show igmp interface** command.

### Related Documentation

- [Understanding IGMP on page 3672](#)
- [Disabling IGMP on page 3757](#)
- [show igmp interface on page 3964](#)



## Changing the IGMP Version

By default, the routing device runs IGMPv2. Routing devices running different versions of IGMP determine the lowest common version of IGMP that is supported by hosts on their subnet and operate in that version.

To enable source-specific multicast (SSM) functionality, you must configure version 3 on the host and the host's directly connected routing device. If a source address is specified in a multicast group that is statically configured, the version must be set to IGMPv3.

If a static multicast group is configured with the source address defined, and the IGMP version is configured to be version 2, the source is ignored and only the group is added. In this case, the join is treated as an IGMPv2 group join.

If you configure the IGMP version setting at the individual interface hierarchy level, it overrides the **interface all** statement.

If you have already configured the routing device to use IGMP version 1 (IGMPv1) and then configure it to use IGMPv2, the routing device continues to use IGMPv1 for up to 6 minutes and then uses IGMPv2.

To change to IGMPv3 for SSM functionality:

1. Configure the IGMP interface.

```
[edit protocols igmp]
user@host# set interface ge-0/0/0 version 3
```

2. Verify the configuration by checking the version field in the output of the **show igmp interfaces** command. The **show igmp statistics** command has version-specific output fields, such as V1 Membership Report, V2 Membership Report, and V3 Membership Report.

### Related Documentation

- [Understanding IGMP on page 3672](#)
- [show pim interfaces on page 4024](#)
- [show igmp statistics on page 3968](#)
- RFC 2236, *Internet Group Management Protocol, Version 2*
- RFC 3376, *Internet Group Management Protocol, Version 3*

## Modifying the IGMP Host-Query Message Interval

The objective of IGMP is to keep routers up to date with group membership of the entire subnet. Routers need not know who all the members are, only that members exist. Each host keeps track of which multicast groups are subscribed to. On each link, one router is elected the querier. The IGMP querier router periodically sends general host-query messages on each attached network to solicit membership information. The messages are sent to the all-systems multicast group address, 224.0.0.1.



The query interval, the response interval, and the robustness variable are related in that they are all variables that are used to calculate the group membership timeout. The group membership timeout is the number of seconds that must pass before a multicast router determines that no more members of a host group exist on a subnet. The group membership timeout is calculated as the (robustness variable x query-interval) + (query-response-interval). If no reports are received for a particular group before the group membership timeout has expired, the routing device stops forwarding remotely-originated multicast packets for that group onto the attached network.

By default, host-query messages are sent every 125 seconds. You can change this interval to change the number of IGMP messages sent on the subnet.

To modify the query interval:

1. Configure the interval.

```
[edit protocols igmp]
user@host# set query-interval 200
```

The value can be from 1 through 1024 seconds.

2. Verify the configuration by checking the IGMP Query Interval field in the output of the **show igmp interface** command.
3. Verify the operation of the query interval by checking the Membership Query field in the output of the **show igmp statistics** command.

#### Related Documentation

- [Understanding IGMP on page 3672](#)
- [Modifying the IGMP Query Response Interval on page 3744](#)
- [Modifying the IGMP Robustness Variable on page 3745](#)
- [show igmp interface on page 3964](#)
- [show igmp statistics on page 3968](#)

## Modifying the IGMP Last-Member Query Interval

The last-member query interval is the maximum amount of time between group-specific query messages, including those sent in response to leave-group messages. You can configure this interval to change the amount of time it takes a routing device to detect the loss of the last member of a group.

When the routing device that is serving as the querier receives a leave-group message from a host, the routing device sends multiple group-specific queries to the group being left. The querier sends a specific number of these queries at a specific interval. The number of queries sent is called the last-member query count. The interval at which the queries are sent is called the last-member query interval. Because both settings are configurable, you can adjust the leave latency. The IGMP leave latency is the time between a request to leave a multicast group and the receipt of the last byte of data for the multicast group.



The last-member query count x (times) the last-member query interval = (equals) the amount of time it takes a routing device to determine that the last member of a group has left the group and to stop forwarding group traffic.

The default last-member query interval is 1 second. You can configure a subsecond interval up to one digit to the right of the decimal point. The configurable range is 0.1 through 0.9, then in 1-second intervals 1 through 999,999.

To modify this interval:

1. Configure the time (in seconds) that the routing device waits for a report in response to a group-specific query.

```
[edit protocols igmp]
user@host# set query-last-member-interval 0.1
```

2. Verify the configuration by checking the IGMP Last Member Query Interval field in the output of the **show igmp interfaces** command.



**NOTE:** You can configure the last-member query count by configuring the robustness variable. The two are always equal.

#### Related Documentation

- [Modifying the IGMP Robustness Variable on page 3745](#)
- [show pim interfaces on page 4024](#)

## Specifying Immediate-Leave Host Removal for IGMP

The immediate leave setting is useful for minimizing the leave latency of IGMP memberships. When this setting is enabled, the routing device leaves the multicast group immediately after the last host leaves the multicast group.

The immediate-leave setting enables host tracking, meaning that the device keeps track of the hosts that send join messages. This allows IGMP to determine when the last host sends a leave message for the multicast group.

When the immediate leave setting is enabled, the device removes an interface from the forwarding-table entry without first sending IGMP group-specific queries to the interface. The interface is pruned from the multicast tree for the multicast group specified in the IGMP leave message. The immediate leave setting ensures optimal bandwidth management for hosts on a switched network, even when multiple multicast groups are being used simultaneously.

When immediate leave is disabled and one host sends a leave group message, the routing device first sends a group query to determine if another receiver responds. If no receiver responds, the routing device removes all hosts on the interface from the multicast group. Immediate leave is disabled by default for both IGMP version 2 and IGMP version 3.





**NOTE:** Although host tracking is enabled for IGMPv2 and MLDv1 when you enable immediate leave, use immediate leave with these versions only when there is one host on the interface. The reason is that IGMPv2 and MLDv1 use a report suppression mechanism whereby only one host on an interface sends a group join report in response to a membership query. The other interested hosts suppress their reports. The purpose of this mechanism is to avoid a flood of reports for the same group. But it also interferes with host tracking, because the router only knows about the one interested host and does not know about the others.

To enable immediate leave on an interface:

1. Configure immediate leave on the IGMP interface.

```
[edit protocols IGMP]
user@host# set interface ge-0/0/0.1 immediate-leave
```

2. Verify the configuration by checking the Immediate Leave field in the output of the `show igmp interface` command.

#### Related Documentation

- [Understanding IGMP on page 3672](#)
- [show igmp interface on page 3964](#)

## Filtering Unwanted IGMP Reports at the IGMP Interface Level

Suppose you need to limit the subnets that can join a certain multicast group. The **group-policy** statement enables you to filter unwanted IGMP reports at the interface level. When this statement is enabled on a router running IGMP version 2 (IGMPv2) or version 3 (IGMPv3), after the router receives an IGMP report, the router compares the group against the specified group policy and performs the action configured in that policy (for example, rejects the report if the policy matches the defined address or network).

You define the policy to match only IGMP group addresses (for IGMPv2) by using the policy's **route-filter** statement to match the group address. You define the policy to match IGMP (source, group) addresses (for IGMPv3) by using the policy's **route-filter** statement to match the group address and the policy's **source-address-filter** statement to match the source address.

To filter unwanted IGMP reports:

1. Configure an IGMPv2 policy.

```
[edit policy-statement reject_policy_v2]
user@host# set from route-filter 224.1.1.1/32 exact
user@host# set from route-filter 239.0.0.0/8 orlonger
user@host# set then reject
```

2. Configure an IGMPv3 policy.

```
[edit policy-statement reject_policy_v3]
user@host# set from route-filter 224.1.1.1/32 exact
```



```

user@host# set from route-filter 239.0.0.0/8 orlonger
user@host# set from source-address-filter 10.0.0.0/8 orlonger
user@host# set from source-address-filter 127.0.0.0/8 orlonger
user@host# set then reject

```

3. Apply the policies to the IGMP interfaces on which you prefer not to receive specific group or (source, group) reports. In this example, **ge-0/0/0.1** is running IGMPv2, and **ge-0/1/1.0** is running IGMPv3.

```

[edit protocols igmp]
user@host# set interface ge-0/0/0.1 group-policy reject_policy_v2
user@host# set interface ge-0/1/1.0 group-policy reject_policy_v3

```

4. Verify the operation of the filter by checking the Rejected Report field in the output of the **show igmp statistics** command.

- Related Documentation**
- [Understanding IGMP on page 3672](#)
  - [Defining Routing Policies](#)
  - [show igmp statistics on page 3968](#)

## Accepting IGMP Messages from Remote Subnetworks

By default, IGMP interfaces accept IGMP messages only from the same subnet. Including the **promiscuous-mode** statement enables the routing device to accept IGMP messages from indirectly connected subnets.



**NOTE:** When you enable IGMP on an unnumbered Ethernet interface that uses a /32 loopback address as a donor address, you must configure IGMP promiscuous mode to accept the IGMP packets received on this interface.



**NOTE:** When enabling promiscuous-mode, all routers on the ethernet segment must be configured with the promiscuous mode statement. Otherwise, only the interface configured with lowest IPv4 address acts as the querier for IGMP for this Ethernet segment.

To enable IGMP promiscuous mode on an interface:

1. Configure the IGMP interface.

```

[edit protocols igmp]
user@host# set interface ge-0/1/1.0 promiscuous-mode

```

2. Verify the configuration by checking the Promiscuous Mode field in the output of the **show igmp interface** command.
3. Verify the operation of the filter by checking the Rx non-local field in the output of the **show igmp statistics** command.



- Related Documentation**
- [Understanding IGMP on page 3672](#)
  - [Configuring the Loopback Interface in the Junos® OS Network Interfaces](#)
  - [show igmp interface on page 3964](#)
  - [show igmp statistics on page 3968](#)

## Modifying the IGMP Query Response Interval

The query response interval is the maximum amount of time that can elapse between when the querier router sends a host-query message and when it receives a response from a host. Configuring this interval allows you to adjust the burst peaks of IGMP messages on the subnet. Set a larger interval to make the traffic less bursty. Bursty traffic refers to an uneven pattern of data transmission: sometimes a very high data transmission rate, whereas at other times a very low data transmission rate.

The query response interval, the host-query interval, and the robustness variable are related in that they are all variables that are used to calculate the group membership timeout. The group membership timeout is the number of seconds that must pass before a multicast router determines that no more members of a host group exist on a subnet. The group membership timeout is calculated as the (robustness variable x query-interval) + (query-response-interval). If no reports are received for a particular group before the group membership timeout has expired, the routing device stops forwarding remotely originated multicast packets for that group onto the attached network.

The default query response interval is 10 seconds. You can configure a subsecond interval up to one digit to the right of the decimal point. The configurable range is 0.1 through 0.9, then in 1-second intervals 1 through 999,999.

To modify the query response interval:

1. Configure the interval.  

```
[edit protocols igmp]  
user@host# set query-response-interval 0.4
```
2. Verify the configuration by checking the IGMP Query Response Interval field in the output of the **show igmp interface** command.
3. Verify the operation of the query interval by checking the Membership Query field in the output of the **show igmp statistics** command.

- Related Documentation**
- [Understanding IGMP on page 3672](#)
  - [Modifying the IGMP Host-Query Message Interval on page 3739](#)
  - [Modifying the IGMP Robustness Variable on page 3745](#)
  - [show igmp interface on page 3964](#)
  - [show igmp statistics on page 3968](#)



## Modifying the IGMP Robustness Variable

Fine-tune the IGMP robustness variable to allow for expected packet loss on a subnet. The robust count automatically changes certain IGMP message intervals for IGMPv2 and IGMPv3. Increasing the robust count allows for more packet loss but increases the leave latency of the subnetwork.

When the query router receives an IGMP leave message on a shared network running IGMPv2, the query router must send an IGMP group query message a specified number of times. The number of IGMP group query messages sent is determined by the robust count.

The value of the robustness variable is also used in calculating the following IGMP message intervals:

- **Group member interval**—Amount of time that must pass before a multicast router determines that there are no more members of a group on a network. This interval is calculated as follows:  $(\text{robustness variable} \times \text{query-interval}) + (1 \times \text{query-response-interval})$ .
- **Other querier present interval**—The robust count is used to calculate the amount of time that must pass before a multicast router determines that there is no longer another multicast router that is the querier. This interval is calculated as follows:  $(\text{robustness variable} \times \text{query-interval}) + (0.5 \times \text{query-response-interval})$ .
- **Last-member query count**—Number of group-specific queries sent before the router assumes there are no local members of a group. The number of queries is equal to the value of the robustness variable.

In IGMPv3, a change of interface state causes the system to immediately transmit a state-change report from that interface. In case the state-change report is missed by one or more multicast routers, it is retransmitted. The number of times it is retransmitted is the robust count minus one. In IGMPv3, the robust count is also a factor in determining the group membership interval, the older version querier interval, and the other querier present interval.

By default, the robustness variable is set to 2. You might want to increase this value if you expect a subnet to lose packets.

The number can be from 2 through 10.

To change the value of the robustness variable:

1. Configure the robust count.

When you set the robust count, you are in effect configuring the number of times the querier retries queries on the connected subnets.

```
[edit protocols igmp]
user@host# set robust-count 5
```

2. Verify the configuration by checking the IGMP Robustness Count field in the output of the **show igmp interfaces** command.



**Related Documentation**

- [Modifying the IGMP Host-Query Message Interval on page 3739](#)
- [Modifying the IGMP Query Response Interval on page 3744](#)
- [Modifying the IGMP Last-Member Query Interval on page 3740](#)
- [show pim interfaces on page 4024](#)
- RFC 2236, *Internet Group Management Protocol, Version 2*
- RFC 3376, *Internet Group Management Protocol, Version 3*

## Limiting the Maximum IGMP Message Rate

This section describes how to change the limit for the maximum number of IGMP packets transmitted in 1 second by the router.

Increasing the maximum number of IGMP packets transmitted per second might be useful on a router with a large number of interfaces participating in IGMP.

To change the limit for the maximum number of IGMP packets the router can transmit in 1 second, include the **maximum-transmit-rate** statement and specify the maximum number of packets per second to be transmitted.

**Related Documentation**

- [maximum-transmit-rate \(Protocols IGMP\) on page 3874](#)

## Enabling IGMP Static Group Membership

You can create IGMP static group membership to test multicast forwarding without a receiver host. When you enable IGMP static group membership, data is forwarded to an interface without that interface receiving membership reports from downstream hosts. The router on which you enable static IGMP group membership must be the designated router (DR) for the subnet. Otherwise, traffic does not flow downstream.

When enabling IGMP static group membership, you cannot configure multiple groups using the **group-count**, **group-increment**, **source-count**, and **source-increment** statements if the **all** option is specified as the IGMP interface.

Class-of-service (CoS) adjustment is not supported with IGMP static group membership.

In this example, you create static group 225.1.1.1.

1. On the DR, configure the static groups to be created by including the **static** statement and **group** statement and specifying which IP multicast address of the group to be created. When creating groups individually, you must specify a unique address for each group.

```
[edit protocols igmp]
user@host# set interface fe-0/1/2 static group 225.1.1.1
```

2. After you commit the configuration, use the **show configuration protocol igmp** command to verify the IGMP protocol configuration.

```
user@host> show configuration protocol igmp
```



```

interface fe-0/1/2.0 {
  static {
    group 225.1.1.1;
  }
}

```

3. After you have committed the configuration and the source is sending traffic, use the **show igmp group** command to verify that static group 225.1.1.1 has been created.

```

user@host> show igmp group
Interface: fe-0/1/2
  Group: 225.1.1.1
    Source: 10.0.0.2
    Last reported by: Local
    Timeout: 0 Type: Static

```



**NOTE:** When you configure static IGMP group entries on point-to-point links that connect routing devices to a rendezvous point (RP), the static IGMP group entries do not generate join messages toward the RP.

When you create IGMP static group membership to test multicast forwarding on an interface on which you want to receive multicast traffic, you can specify that a number of static groups be automatically created. This is useful when you want to test forwarding to multiple receivers without having to configure each receiver separately.

In this example, you create three groups.

1. On the DR, configure the number of static groups to be created by including the **group-count** statement and specifying the number of groups to be created.

```

[edit protocols igmp]
user@host# set interface fe-0/1/2 static group 225.1.1.1 group-count 3

```

2. After you commit the configuration, use the **show configuration protocol igmp** command to verify the IGMP protocol configuration.

```

user@host> show configuration protocol igmp

interface fe-0/1/2.0 {
  static {
    group 225.1.1.1 {
      group-count 3;
    }
  }
}

```

3. After you have committed the configuration and after the source is sending traffic, use the **show igmp group** command to verify that static groups 225.1.1.1, 225.1.1.2, and 225.1.1.3 have been created.

```

user@host> show igmp group
Interface: fe-0/1/2
  Group: 225.1.1.1
    Source: 10.0.0.2
    Last reported by: Local
    Timeout: 0 Type: Static

```



```
Group: 225.1.1.2
Source: 10.0.0.2
Last reported by: Local
Timeout: 0 Type: Static
Group: 225.1.1.3
Source: 10.0.0.2
Last reported by: Local
Timeout: 0 Type: Static
```

When you create IGMP static group membership to test multicast forwarding on an interface on which you want to receive multicast traffic, you can also configure the group address to be automatically incremented for each group created. This is useful when you want to test forwarding to multiple receivers without having to configure each receiver separately and when you do not want the group addresses to be sequential.

In this example, you create three groups and increase the group address by an increment of two for each group.

1. On the DR, configure the group address increment by including the **group-increment** statement and specifying the number by which the address should be incremented for each group. The increment is specified in dotted decimal notation similar to an IPv4 address.

```
[edit protocols igmp]
```

```
user@host# set interface fe-0/1/2 static group 225.1.1.1 group-count 3 group-increment 0.0.0.2
```

2. After you commit the configuration, use the **show configuration protocol igmp** command to verify the IGMP protocol configuration.

```
user@host> show configuration protocol igmp
```

```
interface fe-0/1/2.0 {
  version 3;
  static {
    group 225.1.1.1 {
      group-increment 0.0.0.2;
      group-count 3;
    }
  }
}
```

3. After you have committed the configuration and after the source is sending traffic, use the **show igmp group** command to verify that static groups 225.1.1.1, 225.1.1.3, and 225.1.1.5 have been created.

```
user@host> show igmp group
```

```
Interface: fe-0/1/2
Group: 225.1.1.1
Source: 10.0.0.2
Last reported by: Local
Timeout: 0 Type: Static
Group: 225.1.1.3
Source: 10.0.0.2
Last reported by: Local
Timeout: 0 Type: Static
Group: 225.1.1.5
Source: 10.0.0.2
```



```
Last reported by: Local
Timeout: 0 Type: Static
```

When you create IGMP static group membership to test multicast forwarding on an interface on which you want to receive multicast traffic, and your network is operating in source-specific multicast (SSM) mode, you can also specify that the multicast source address be accepted. This is useful when you want to test forwarding to multicast receivers from a specific multicast source.

If you specify a group address in the SSM range, you must also specify a source.

If a source address is specified in a multicast group that is statically configured, the IGMP version on the interface must be set to IGMPv3. IGMPv2 is the default value.

In this example, you create group 225.1.1.1 and accept IP address 10.0.0.2 as the only source.

1. On the DR, configure the source address by including the **source** statement and specifying the IPv4 address of the source host.

```
[edit protocols igmp]
user@host# set interface fe-0/1/2 static group 225.1.1.1 source 10.0.0.2
```

2. After you commit the configuration, use the **show configuration protocol igmp** command to verify the IGMP protocol configuration.

```
user@host> show configuration protocol igmp

interface fe-0/1/2.0 {
  version 3;
  static {
    group 225.1.1.1 {
      source 10.0.0.2;
    }
  }
}
```

3. After you have committed the configuration and the source is sending traffic, use the **show igmp group** command to verify that static group 225.1.1.1 has been created and that source 10.0.0.2 has been accepted.

```
user@host> show igmp group
Interface: fe-0/1/2
Group: 225.1.1.1
Source: 10.0.0.2
Last reported by: Local
Timeout: 0 Type: Static
```



When you create IGMP static group membership to test multicast forwarding on an interface on which you want to receive multicast traffic, you can specify that a number of multicast sources be automatically accepted. This is useful when you want to test forwarding to multicast receivers from more than one specified multicast source.

In this example, you create group 225.1.1.1 and accept addresses 10.0.0.2, 10.0.0.3, and 10.0.0.4 as the sources.

1. On the DR, configure the number of multicast source addresses to be accepted by including the **source-count** statement and specifying the number of sources to be accepted.

```
[edit protocols igmp]
```

```
user@host# set interface fe-0/1/2 static group 225.1.1.1 source 10.0.0.2 source-count 3
```

2. After you commit the configuration, use the **show configuration protocol igmp** command to verify the IGMP protocol configuration.

```
user@host> show configuration protocol igmp
```

```
interface fe-0/1/2.0 {  
  version 3;  
  static {  
    group 225.1.1.1 {  
      source 10.0.0.2 {  
        source-count 3;  
      }  
    }  
  }  
}
```

3. After you have committed the configuration and the source is sending traffic, use the **show igmp group** command to verify that static group 225.1.1.1 has been created and that sources 10.0.0.2, 10.0.0.3, and 10.0.0.4 have been accepted.

```
user@host> show igmp group
```

```
Interface: fe-0/1/2  
  Group: 225.1.1.1  
    Source: 10.0.0.2  
    Last reported by: Local  
    Timeout: 0 Type: Static  
  Group: 225.1.1.1  
    Source: 10.0.0.3  
    Last reported by: Local  
    Timeout: 0 Type: Static  
  Group: 225.1.1.1  
    Source: 10.0.0.4  
    Last reported by: Local  
    Timeout: 0 Type: Static
```



When you configure static groups on an interface on which you want to receive multicast traffic, and specify that a number of multicast sources be automatically accepted, you can also specify the number by which the address should be incremented for each source accepted. This is useful when you want to test forwarding to multiple receivers without having to configure each receiver separately and you do not want the source addresses to be sequential.

In this example, you create group 225.1.1.1 and accept addresses 10.0.0.2, 10.0.0.4, and 10.0.0.6 as the sources.

1. Configure the multicast source address increment by including the **source-increment** statement and specifying the number by which the address should be incremented for each source. The increment is specified in dotted decimal notation similar to an IPv4 address.

```
[edit protocols igmp]
```

```
user@host# set interface fe-0/1/2 static group 225.1.1.1 source 10.0.0.2 source-count 3 source-increment 0.0.0.2
```

2. After you commit the configuration, use the **show configuration protocol igmp** command to verify the IGMP protocol configuration.

```
user@host> show configuration protocol igmp
```

```
interface fe-0/1/2.0 {
  version 3;
  static {
    group 225.1.1.1 {
      source 10.0.0.2 {
        source-count 3;
        source-increment 0.0.0.2;
      }
    }
  }
}
```

3. After you have committed the configuration and after the source is sending traffic, use the **show igmp group** command to verify that static group 225.1.1.1 has been created and that sources 10.0.0.2, 10.0.0.4, and 10.0.0.6 have been accepted.

```
user@host> show igmp group
```

```
Interface: fe-0/1/2
  Group: 225.1.1.1
    Source: 10.0.0.2
    Last reported by: Local
    Timeout: 0 Type: Static
  Group: 225.1.1.1
    Source: 10.0.0.4
    Last reported by: Local
    Timeout: 0 Type: Static
  Group: 225.1.1.1
    Source: 10.0.0.6
    Last reported by: Local
    Timeout: 0 Type: Static
```



When you configure static groups on an interface on which you want to receive multicast traffic and your network is operating in source-specific multicast (SSM) mode, you can specify that certain multicast source addresses be excluded.

By default the multicast source address configured in a static group operates in include mode. In include mode the multicast traffic for the group is accepted from the source address configured. You can also configure the static group to operate in exclude mode. In exclude mode the multicast traffic for the group is accepted from any address other than the source address configured.

If a source address is specified in a multicast group that is statically configured, the IGMP version on the interface must be set to IGMPv3. IGMPv2 is the default value.

In this example, you exclude address 10.0.0.2 as a source for group 225.1.1.1.

1. On the DR, configure a multicast static group to operate in exclude mode by including the **exclude** statement and specifying which IPv4 source address to exclude.

```
[edit protocols igmp]
```

```
user@host# set interface fe-0/1/2 static group 225.1.1.1 exclude source 10.0.0.2
```

2. After you commit the configuration, use the **show configuration protocol igmp** command to verify the IGMP protocol configuration.

```
user@host> show configuration protocol igmp
```

```
interface fe-0/1/2.0 {
  version 3;
  static {
    group 225.1.1.1 {
      exclude;
      source 10.0.0.2;
    }
  }
}
```

3. After you have committed the configuration and the source is sending traffic, use the **show igmp group detail** command to verify that static group 225.1.1.1 has been created and that the static group is operating in exclude mode.

```
user@host> show igmp group detail
```

```
Interface: fe-0/1/2
Group: 225.1.1.1
Group mode: Exclude
Source: 10.0.0.2
Last reported by: Local
Timeout: 0 Type: Static
```

#### Related Documentation

- [Enabling MLD Static Group Membership](#)
- [group \(Protocols IGMP\) on page 3866](#)
- [group-count \(Protocols IGMP\) on page 3867](#)
- [group-increment \(Protocols IGMP\) on page 3867](#)
- [source-count \(Protocols IGMP\) on page 3881](#)



- [source-increment \(Protocols IGMP\) on page 3881](#)
- [static \(Protocols IGMP\) on page 3882](#)

## Recording IGMP Join and Leave Events

To determine whether IGMP tuning is needed in a network, you can configure the routing device to record IGMP join and leave events. You can record events globally for the routing device or for individual interfaces.

[Table 240 on page 3753](#) describes the recordable IGMP events.

**Table 240: IGMP Event Messages**

| ERRMSG Tag                  | Definition                                                     |
|-----------------------------|----------------------------------------------------------------|
| RPD_IGMP_JOIN               | Records IGMP join events.                                      |
| RPD_IGMP_LEAVE              | Records IGMP leave events.                                     |
| RPD_IGMP_ACCOUNTING_ON      | Records when IGMP accounting is enabled on an IGMP interface.  |
| RPD_IGMP_ACCOUNTING_OFF     | Records when IGMP accounting is disabled on an IGMP interface. |
| RPD_IGMP_MEMBERSHIP_TIMEOUT | Records IGMP membership timeout events.                        |

To enable IGMP accounting:

1. Enable accounting globally or on an IGMP interface. This example shows both options.

```
[edit protocols igmp]
user@host# set accounting
user@host# set interface fe-0/1/0.2 accounting
```

2. Configure the events to be recorded and filter the events to a system log file with a descriptive filename, such as **igmp-events**.

```
[edit system syslog file igmp-events]
user@host# set any info
user@host# set match ".*RPD_IGMP_JOIN.* | .*RPD_IGMP_LEAVE.* |
.*RPD_IGMP_ACCOUNTING.* | .*RPD_IGMP_MEMBERSHIP_TIMEOUT.*"
```

3. Periodically archive the log file.

This example rotates the file size when it reaches 100 KB and keeps three files.

```
[edit system syslog file igmp-events]
user@host# set archive size 100000
user@host# set archive files 3
user@host# set archive archive-sites "ftp://user@host1//var/tmp" password
"anonymous"
user@host# set archive archive-sites "ftp://user@host2//var/tmp" password "test"
user@host# set archive transfer-interval 24
user@host# set archive start-time 2011-01-07:12:30
```



4. You can monitor the system log file as entries are added to the file by running the **monitor start** and **monitor stop** commands.

```
user@host> monitor start igmp-events
```

```
*** igmp-events ***
```

```
Apr 16 13:08:23 host mgd[16416]: UI_CMDLINE_READ_LINE: User 'user', command  
'run monitor start igmp-events '  
monitor
```

**Related  
Documentation**

- [Understanding IGMP on page 3672](#)
- [Specifying Log File Size, Number, and Archiving Properties on page 5563](#)

## Limiting the Number of IGMP Multicast Group Joins on Logical Interfaces

The **group-limit** statement enables you to limit the number of IGMP multicast group joins for logical interfaces. When this statement is enabled on a router running IGMP version 2 (IGMPv2) or version 3 (IGMPv3), the limit is applied upon receipt of the group report. Once the group limit is reached, subsequent join requests are rejected.

When configuring limits for IGMP multicast groups, keep the following in mind:

- Each any-source group (\*G) counts as one group toward the limit.
- Each source-specific group (S,G) counts as one group toward the limit.
- Groups in IGMPv3 exclude mode are counted toward the limit.
- Multiple source-specific groups count individually toward the group limit, even if they are for the same group. For example, (S1, G1) and (S2, G1) would count as two groups toward the configured limit.
- Combinations of any-source groups and source-specific groups count individually toward the group limit, even if they are for the same group. For example, (\*, G1) and (S, G1) would count as two groups toward the configured limit.
- Configuring and committing a group limit on a network that is lower than what already exists on the network results in the removal of all groups from the configuration. The groups must then request to rejoin the network (up to the newly configured group limit).
- You can dynamically limit multicast groups on IGMP logical interfaces using dynamic profiles.

Beginning with Junos OS 12.2, you can optionally configure a system log warning threshold for IGMP multicast group joins received on the logical interface. It is helpful to review the system log messages for troubleshooting purposes and to detect if an excessive amount of IGMP multicast group joins have been received on the interface. These log messages convey when the configured group limit has been exceeded, when the configured threshold has been exceeded, and when the number of groups drop below the configured threshold.

The **group-threshold** statement enables you to configure the threshold at which a warning message is logged. The range is 1 through 100 percent. The warning threshold is a percentage of the group limit, so you must configure the **group-limit** statement to configure



a warning threshold. For instance, when the number of groups exceed the configured warning threshold, but remain below the configured group limit, multicast groups continue to be accepted, and the device logs the warning message. In addition, the device logs a warning message after the number of groups drop below the configured warning threshold. You can further specify the amount of time (in seconds) between the log messages by configuring the **log-interval** statement. The range is 6 through 32,767 seconds.

You might consider throttling log messages because every entry added after the configured threshold and every entry rejected after the configured limit causes a warning message to be logged. By configuring a log interval, you can throttle the amount of system log warning messages generated for IGMP multicast group joins.

To limit multicast group joins on an IGMP logical interface:

1. Access the logical interface at the IGMP protocol hierarchy level.

```
[edit]
user@host# edit protocols igmp interface interface-name
```

2. Specify the group limit for the interface.

```
[edit protocols igmp interface interface-name]
user@host# set group-limit limit
```

3. (Optional) Configure the threshold at which a warning message is logged.

```
[edit protocols igmp interface interface-name]
user@host# set group-threshold value
```

4. (Optional) Configure the amount of time between log messages.

```
[edit protocols igmp interface interface-name]
user@host# set log-interval seconds
```

To confirm your configuration, use the **show protocols igmp** command. To verify the operation of IGMP on the interface, including the configured group limit and the optional warning threshold and interval between log messages, use the **show igmp interface** command.

**Related Documentation**

- [Enabling IGMP Static Group Membership on page 3746](#)

## Tracing IGMP Protocol Traffic

Tracing operations record detailed messages about the operation of routing protocols, such as the various types of routing protocol packets sent and received, and routing policy actions. You can specify which trace operations are logged by including specific tracing flags. The following table describes the flags that you can include.

| Flag                       | Description           |
|----------------------------|-----------------------|
| <b>all</b>                 | Trace all operations. |
| <b>client-notification</b> | Trace notifications.  |



| Flag                     | Description                                                                         |
|--------------------------|-------------------------------------------------------------------------------------|
| <b>general</b>           | Trace general flow.                                                                 |
| <b>group</b>             | Trace group operations.                                                             |
| <b>host-notification</b> | Trace host notifications.                                                           |
| <b>leave</b>             | Trace leave group messages (IGMPv2 only).                                           |
| <b>mtrace</b>            | Trace mtrace packets. Use the <b>mtrace</b> command to troubleshoot the software.   |
| <b>normal</b>            | Trace normal events.                                                                |
| <b>packets</b>           | Trace all IGMP packets.                                                             |
| <b>policy</b>            | Trace policy processing.                                                            |
| <b>query</b>             | Trace IGMP membership query messages, including general and group-specific queries. |
| <b>report</b>            | Trace membership report messages.                                                   |
| <b>route</b>             | Trace routing information.                                                          |
| <b>state</b>             | Trace state transitions.                                                            |
| <b>task</b>              | Trace task processing.                                                              |
| <b>timer</b>             | Trace timer processing.                                                             |

In the following example, tracing is enabled for all routing protocol packets. Then tracing is narrowed to focus only on IGMP packets of a particular type. To configure tracing operations for IGMP:

1. (Optional) Configure tracing at the routing options level to trace all protocol packets.

```
[edit routing-options traceoptions]
user@host# set file all-packets-trace
user@host# set flag all
```

2. Configure the filename for the IGMP trace file.

```
[edit protocols igmp traceoptions]
user@host# set file igmp-trace
```

3. (Optional) Configure the maximum number of trace files.

```
[edit protocols igmp traceoptions]
user@host# set file files 5
```

4. (Optional) Configure the maximum size of each trace file.



```
[edit protocols igmp traceoptions]
user@host# set file size 1m
```

5. (Optional) Enable unrestricted file access.

```
[edit protocols igmp traceoptions]
user@host# set file world-readable
```

6. Configure tracing flags. Suppose you are troubleshooting issues with a particular multicast group. The following example shows how to flag all events for packets associated with the group IP address.

```
[edit protocols igmp traceoptions]
user@host# set flag group | match 232.1.1.2
```

7. View the trace file.

```
user@host> file list /var/log
user@host> file show /var/log/igmp-trace
```

#### Related Documentation

- [Understanding IGMP on page 3672](#)
- Junos OS Tracing and Logging Operations in the Junos OS System Basics Configuration Guide
- [mtrace on page 3947](#) in the Junos OS Operational Mode Commands

## Disabling IGMP

To disable IGMP on an interface, include the **disable** statement:

```
disable;
```

You can include this statement at the following hierarchy levels:

- `[edit protocols igmp interface interface-name]`
- `[edit logical-systems logical-system-name protocols igmp interface interface-name]`

#### Related Documentation

- [Enabling IGMP on page 3738](#)

## IGMP Snooping

- [Configuring IGMP Snooping on page 3758](#)
- [Changing the IGMP Snooping Group Timeout Value on page 3759](#)
- [Example: Configuring IGMP Snooping on page 3759](#)
- [Configuring Multicast VLAN Registration \(CLI Procedure\) on page 3762](#)
- [Example: Configuring Multicast VLAN Registration on page 3763](#)



## Configuring IGMP Snooping

With IGMP snooping enabled, a switch monitors the IGMP (Internet Group Management Protocol) traffic between hosts and multicast routers and uses what it learns to forward multicast traffic to only the downstream interfaces that are connected to interested receivers. This conserves bandwidth by allowing the switch to send multicast traffic to only those interfaces that are connected to devices that want to receive the traffic (instead of flooding the traffic to all the downstream VLAN interfaces).



**NOTE:** You cannot configure IGMP snooping on a secondary VLAN.

To enable IGMP snooping and configure individual options as needed for your network by using the CLI:

1. Enable IGMP snooping on a VLAN:

```
[edit protocols]
user@switch# set igmp-snooping vlan employee-vlan
```

2. Configure the switch to immediately remove group membership from interfaces on a VLAN when it receives a leave message through that VLAN, and have it not forward any membership queries for the multicast group to the VLAN (IGMPv2 only):

```
[edit protocols]
user@switch# set igmp-snooping vlan vlan-name immediate-leave
```

3. Configure an interface to belong to a multicast group:

```
[edit protocols]
user@switch# set igmp-snooping vlan vlan-name interface interface-name static group
group-address
```

4. Configure an interface to forward IGMP queries received from multicast routers.

```
[edit protocols]
user@switch# set igmp-snooping vlan vlan-name interface interface-name
multicast-router-interface
```

5. Configure the switch to wait for four timeout intervals before timing out a multicast group on a VLAN:

```
[edit protocols]
user@switch# set igmp-snooping vlan vlan-name robust-count 4
```

6. If you want the switch to act as an IGMP querier, enter the following:

```
[edit protocols]
user@switch# set igmp-snooping vlan vlan-name igmp-querier source-address source address
```

The switch uses the address that you configure as the source address in the IGMP queries that it sends. If there are any multicast routers on the same local network, make sure the source address for the IGMP querier is greater (a higher number) than the IP addresses for those routers on the network. This ensures that switch is always the IGMP querier on the network.

### Related Documentation

- [IGMP Snooping Overview on page 3674](#)
- [Example: Configuring IGMP Snooping on page 3759](#)
- [Changing the IGMP Snooping Group Timeout Value on page 3759](#)



- [Monitoring IGMP Snooping on page 3925](#)

## Changing the IGMP Snooping Group Timeout Value

The IGMP snooping group timeout value determines how long a switch waits to receive an IGMP query from a multicast router before removing a multicast group from its multicast cache table. A switch calculates the timeout value by using the **query-interval** and **query-response-interval** values.

When you enable IGMP snooping, the **query-interval** and **query-response-interval** values are applied to all VLANs on the switch. The values are:

- **query-interval**—125 seconds
- **query-response-interval**—10 seconds

The switch automatically calculates the group timeout value for an IGMP snooping-enabled switch by multiplying the **query-interval** value by 2 (the default **robust-count** value) and then adding the **query-response-interval** value. By default, the switch waits 260 seconds to receive an IGMP query before removing a multicast group from its multicast cache table:  $(125 \times 2) + 10 = 260$ .

You can modify the group timeout value by changing the **robust-count** value. For example, if you want the system to wait 510 seconds before timing groups out— $(125 \times 4) + 10 = 510$ —enter this command:

```
[edit protocols]
user@switch# set igmp-snooping vlan employee-vlan robust-count (IGMP Snooping) 4
```

### Related Documentation

- [Verifying the IGMP Snooping Group Timeout Value on page 3926](#)
- [Example: Configuring IGMP Snooping on page 3759](#)
- [Configuring IGMP Snooping on page 3758](#)

## Example: Configuring IGMP Snooping

With IGMP snooping enabled, a switch monitors the IGMP (Internet Group Management Protocol) traffic between hosts and multicast routers and uses what it learns to forward multicast traffic to only the downstream interfaces that are connected to interested receivers. This conserves bandwidth by allowing the switch to send multicast traffic to only those interfaces that are connected to devices that want to receive the traffic (instead of flooding the traffic to all the downstream VLAN interfaces).

This example describes how to configure IGMP snooping:

- [Requirements on page 3760](#)
- [Overview and Topology on page 3760](#)
- [Configuration on page 3760](#)



## Requirements

This example requires Junos OS Release 11.1 or later on a QFX Series product.

Before you configure IGMP snooping, be sure you have:

- Configured the **employee-vlan** VLAN
- Assigned interfaces **ge-0/0/1**, **ge-0/0/2**, and **ge-0/0/3** to **employee-vlan**

## Overview and Topology

In this example you configure an interface to receive multicast traffic from a source and configure some multicast-related behavior for downstream interfaces. The example assumes that IGMP snooping was previously disabled for the VLAN.

Table 241 on page 3760 shows the components of the topology for this example.

**Table 241: Components of the IGMP Snooping Topology**

| Components                                    | Settings                                            |
|-----------------------------------------------|-----------------------------------------------------|
| VLAN name                                     | <b>employee-vlan</b> , tag 20                       |
| Interfaces in <b>employee-vlan</b>            | <b>ge-0/0/1</b> , <b>ge-0/0/2</b> , <b>ge-0/0/3</b> |
| Multicast IP address for <b>employee-vlan</b> | 225.100.100.100                                     |

## Configuration

To configure basic IGMP snooping on a switch:

### CLI Quick Configuration

To quickly configure IGMP snooping, copy the following commands and paste them into a terminal window:

```
[edit protocols]
set igmp-snooping vlan employee-vlan
set igmp-snooping vlan employee-vlan interface ge-0/0/3 static group 225.100.100.100
set igmp-snooping vlan employee-vlan interface ge-0/0/2 multicast-router-interface
set igmp-snooping vlan employee-vlan robust-count 4
```

### Step-by-Step Procedure

Configure IGMP snooping:

- Enable and configure IGMP snooping on the VLAN **employee-vlan**:  

```
[edit protocols]
user@switch# set igmp-snooping vlan employee-vlan
```
- Configure a interface to belong to a multicast group:  

```
[edit protocols]
user@switch# set igmp-snooping vlan employee-vlan interface ge-0/0/3 static group 225.100.100.100
```
- Configure an interface to forward IGMP queries received from multicast routers.  

```
[edit protocols]
```



- ```
user@switch# set igmp-snooping vlan employee-vlan interface ge-0/0/2
multicast-router-interface
```
4. Configure the switch to wait for four timeout intervals before timing out a multicast group on a VLAN:
- ```
[edit protocols]
user@switch# set igmp-snooping vlan employee-vlan robust-count 4
```

**Results** Check the results of the configuration:

```
user@switch# show protocols igmp-snooping
vlan employee-vlan {
  robust-count 4;
}
interface ge-0/0/2 {
  multicast-router-interface;
}
interface ge-0/0/3 {
  static {
    group 255.100.100.100;
  }
}
```

**Related  
Documentation**

- [IGMP Snooping Overview on page 3674](#)
- [Configuring IGMP Snooping on page 3758](#)
- [Changing the IGMP Snooping Group Timeout Value on page 3759](#)
- [Monitoring IGMP Snooping on page 3925](#)
- [Example: Setting Up Bridging with Multiple VLANs on page 1476.](#)



## Configuring Multicast VLAN Registration (CLI Procedure)

Multicast VLAN registration (MVR) enables hosts that are not part of a multicast source VLAN (MVLAN) to still receive multicast streams from the MVLAN, allowing an MVLAN to be shared across a Layer 2 network. Hosts remain in their own VLANs for bandwidth and security reasons but are able to receive multicast streams from the MVLAN.

You can configure one or more VLANs on a switch to be MVLANs or MVR receiver VLANs. By default, MVR is not configured on EX Series switches and the QFX Series.



**NOTE:** MVR is supported on VLANs running IGMP version 2 (IGMPv2) only.



**NOTE:** When you configure MVR, the following restrictions apply:

- You cannot enable multicast protocols on VLAN interfaces that are members of MVLANs.
- If you configure an MVLAN in proxy mode, IGMP snooping proxy mode is automatically enabled on all MVR receiver VLANs of this MVLAN. If a VLAN is an MVR receiver VLAN for multiple MVLANs, all of the MVLANs must have proxy mode enabled or all must have proxy mode disabled. You can enable proxy mode only on VLANs that are configured as MVR source VLANs and that are not configured for Q-in-Q tunneling.
- After you configure a VLAN as an MVLAN, that VLAN is no longer available for other uses.

To configure MVR:

1. Configure the VLAN named mv0 to be an MVLAN:

```
[edit protocols]
user@switch# set igmp-snooping vlan mv0 data-forwarding source groups
225.10.0.0/16
```

2. Configure the MVLAN mv0 to be a proxy VLAN:

```
[edit protocols]
user@switch# set igmp-snooping vlan mv0 proxy source-address 10.0.0.1
```

3. Configure the VLAN named v2 to be an MVR receiver VLAN with mv0 as its source:

```
[edit protocols]
user@switch# set igmp-snooping vlan v2 data-forwarding receiver source-vlans mv0
```

4. Install forwarding entries in the MVR receiver VLAN:

```
[edit protocols]
user@switch# set igmp-snooping vlan mv0 data-forwarding receiver install
```

**Related  
Documentation**

- [Example: Configuring Multicast VLAN Registration on page 3763](#)



- [Understanding Multicast VLAN Registration on page 3683](#)

## Example: Configuring Multicast VLAN Registration

Multicast VLAN registration (MVR) enables hosts that are not part of a multicast VLAN (MVLAN) to receive multicast streams from the MVLAN, which enable the MVLAN to be shared across the Layer 2 network and eliminate the need to send duplicate multicast streams to each requesting VLAN in the network. Hosts remain in their own VLANs for bandwidth and security reasons.

This example describes how to configure MVR on EX Series switches and the QFX Series.

- [Requirements on page 3763](#)
- [Overview and Topology on page 3763](#)
- [Configuration on page 3766](#)

### Requirements

---

This example uses the following hardware and software components:

- One EX Series switch or the QFX Series
- Junos OS Release 9.6 or later for EX Series switches or Junos OS Release 12.3 or later for the QFX Series

Before you configure MVR, be sure you have:

- Configured two or more VLANs on the switch. See the task for your platform:
  - [Example: Setting Up Bridging with Multiple VLANs for EX Series Switches](#)
  - [“Example: Setting Up Bridging with Multiple VLANs” on page 1476](#) for the QFX Series
- Connected the switch to a network that can transmit IPTV multicast streams from a video server.
- Connected a host that is capable of receiving IPTV multicast streams to an interface in one of the VLANs.

### Overview and Topology

---

In a standard Layer 2 network, a multicast stream received on one VLAN is never distributed to interfaces outside that VLAN. If hosts in multiple VLANs request the same multicast stream, a separate copy of that multicast stream is distributed to the requesting VLANs.

MVR introduces the concept of a *multicast source VLAN* (MVLAN), which is created by MVR and becomes the only VLAN over which multicast traffic flows throughout the Layer 2 network. Multicast traffic can then be selectively forwarded from interfaces on the MVLAN (source ports) to hosts that are connected to interfaces (multicast receiver ports) that are not part of the multicast source VLAN. When you configure an MVLAN, you assign a range of multicast group addresses to it. You then configure other VLANs



to be MVR receiver VLANs, which receive multicast streams from the MVLAN. The MVR receiver ports comprise all the interfaces that exist on any of the MVR receiver VLANs.

You can configure MVR to operate in one of two modes: transparent mode (the default mode) or proxy mode. Both modes enable MVR to forward only one copy of a multicast stream to the Layer 2 network.

In transparent mode, the switch receives one copy of each IPTV multicast stream and then replicates the stream only to those hosts that want to receive it, while forwarding all other types of multicast traffic without modification. [Figure 137 on page 3765](#) shows how MVR operates in transparent mode.

In proxy mode, the switch acts as a proxy for the IGMP multicast router in the MVLAN for MVR group memberships established in the MVR receiver VLANs and generates and sends IGMP packets into the MVLAN as needed. [Figure 138 on page 3766](#) shows how MVR operates in proxy mode.

This example shows how to configure MVR in both transparent mode and proxy mode on an EX Series switch or the QFX Series. The topology includes a video server that is connected to a multicast router, which in turn forwards the IPTV multicast traffic in the MVLAN to the Layer 2 network.

[Figure 137 on page 3765](#) shows the MVR topology in transparent mode. Interfaces P1 and P2 on Switch C belong to service VLAN s0 and MVLAN mv0. Interface P4 of Switch C also belongs to service VLAN s0. In the upstream direction of the network, only non-IPTV traffic is being carried in individual customer VLANs of service VLAN s0. VLAN c0 is an example of this type of customer VLAN. IPTV traffic is being carried on MVLAN mv0. If any host on any customer VLAN connected to port P4 requests an MVR stream, Switch C takes the stream from VLAN mv0 and replicates that stream onto port P4 with tag mv0. IPTV traffic, along with other network traffic, flows from port P4 out to the Digital Subscriber Line Access Multiplexer (DSLAM) D1.



Figure 137: MVR Topology in Transparent Mode


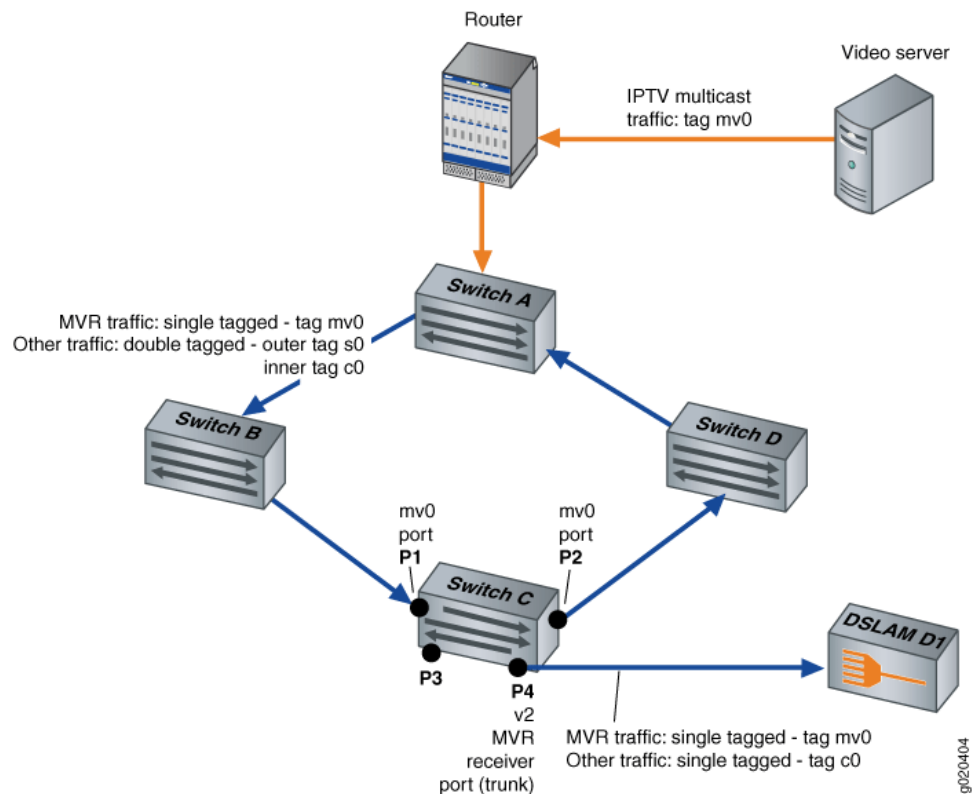


Figure 138 on page 3766 shows the MVR topology in proxy mode. Interfaces P1 and P2 on Switch C belong to MVLAN mv0 and customer VLAN c0. Interface P4 on Switch C is an access port of customer VLAN c0. In the upstream direction of the network, only non-IPTV traffic is being carried on customer VLAN c0. Any IPTV traffic requested by hosts on VLAN c0 is replicated untagged to port P4 based on streams received in MVLAN mv0. IPTV traffic flows from port P4 out to an IPTV-enabled device in Host H1. Other traffic, such as data and voice traffic, also flows from port P4 to other network devices in Host H1.



Figure 138: MVR Topology in Proxy Mode

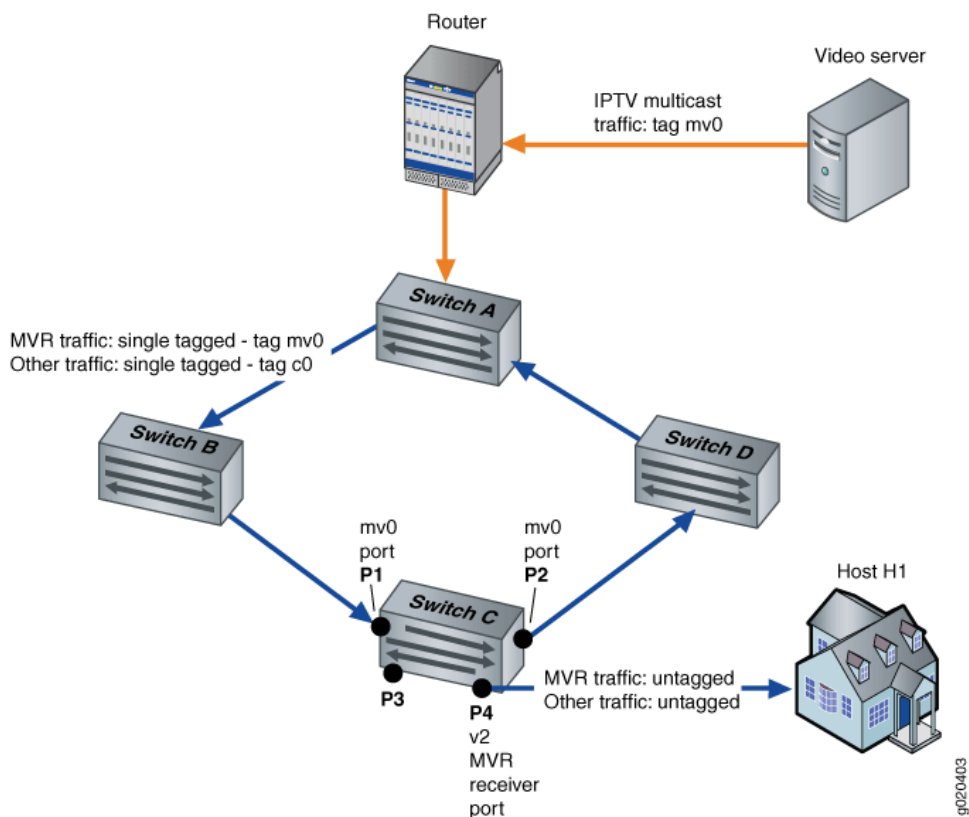

For information on VLAN tagging, see the topic for your platform:

- Understanding Bridging and VLANs on EX Series Switches
- “Understanding VLANs” on page 1385 on the QFX Series

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit protocols igmp-snooping]** hierarchy level.

```
set vlan mv0 data-forwarding source groups 225.10.0.0/16
set vlan v2 data-forwarding receiver source-vlans mv0
set vlan v2 data-forwarding receiver install
set vlan mv0 proxy source-address 10.1.1.1
```



**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure MVR:

1. Configure VLAN mv0 to be an MVLAN:  

```
[edit protocols igmp-snooping]
user@switch# set vlan mv0 data-forwarding source groups 225.10.0.0/16
```
2. Configure VLAN v2 to be a multicast receiver VLAN with mv0 as its source:  

```
[edit protocols igmp-snooping]
user@switch# set vlan v2 data-forwarding receiver source-vlans mv0
```
3. (Optional) Install forwarding entries in the multicast receiver VLAN v2:  

```
[edit protocols igmp-snooping]
user@switch# set vlan v2 data-forwarding receiver install
```
4. (Optional) Configure MVR in proxy mode:  

```
[edit protocols igmp-snooping]
user@switch# set vlan mv0 proxy source-address 10.1.1.1
```

**Results** From configuration mode, confirm your configuration by entering the **show** command at the **[edit protocols igmp-snooping]** hierarchy level. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit protocols igmp-snooping]
user@switch# show
vlan mv0 {
  proxy {
    source-address 10.1.1.1;
  }
  data-forwarding {
    source {
      groups 225.10.0.0/16;
    }
  }
}
vlan v2 {
  data-forwarding {
    receiver {
      source-vlans mv0;
      install;
    }
  }
}
```

**Related Documentation**

- [Configuring Multicast VLAN Registration \(CLI Procedure\) on page 3762](#)
- [Understanding Multicast VLAN Registration on page 3683](#)



## MSDP

---

- [Configuring MSDP on page 3768](#)
- [Tracing MSDP Protocol Traffic on page 3769](#)
- [Configuring the Interface to Accept Traffic from a Remote Source on page 3771](#)
- [Example: Configuring MSDP on page 3772](#)
- [Example: Configuring MSDP with Active Source Limits and Mesh Groups on page 3773](#)
- [Example: Configuring PIM Anycast With or Without MSDP on page 3779](#)
- [Configuring a PIM Anycast RP Router with MSDP on page 3782](#)

### Configuring MSDP

To configure the Multicast Source Discovery Protocol (MSDP), include the **msdp** statement:

```
msdp {
  disable;
  active-source-limit {
    maximum number;
    threshold number;
  }
  data-encapsulation (disable | enable);
  export [ policy-names ];
  group group-name {
    ... group-configuration ...
  }
  hold-time seconds;
  import [ policy-names ];
  local-address address;
  keep-alive seconds;
  peer address {
    ... peer-configuration ...
  }
  rib-group group-name;
  source ip-prefix </prefix-length> {
    active-source-limit {
      maximum number;
      threshold number;
    }
  }
  sa-hold-time seconds;
  traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable>;
    flag flag <flag-modifier> <disable>;
  }
  group group-name {
    disable;
    export [ policy-names ];
    import [ policy-names ];
    local-address address;
    mode (mesh-group | standard);
  }
}
```



```

peer address {
  ... same statements as at the [edit protocols msdp peer address] hierarchy level shown
  just following ...
}
traceoptions {
  file filename <files number> <size size> <world-readable | no-world-readable>;
  flag flag <flag-modifier> <disable>;
}
}
peer address {
  disable;
  active-source-limit {
    maximum number;
    threshold number;
  }
  authentication-key peer-key;
  default-peer;
  export [ policy-names ];
  import [ policy-names ];
  local-address address;
  traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable>;
    flag flag <flag-modifier> <disable>;
  }
}
}

```

You can include this statement at the following hierarchy levels:

- [edit protocols]
- [edit routing-instances *routing-instance-name* protocols]
- [edit logical-systems *logical-system-name* protocols]
- [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols]

By default, MSDP is disabled.

#### Related Documentation

- [Example: Configuring MSDP in a Routing Instance](#)
- [Example: Configuring MSDP with Active Source Limits and Mesh Groups on page 3773](#)

## Tracing MSDP Protocol Traffic

Tracing operations record detailed messages about the operation of routing protocols, such as the various types of routing protocol packets sent and received, and routing policy actions. You can specify which trace operations are logged by including specific tracing flags. The following table describes the flags that you can include.

| Flag | Description           |
|------|-----------------------|
| all  | Trace all operations. |



| Flag                          | Description                              |
|-------------------------------|------------------------------------------|
| <b>general</b>                | Trace general events.                    |
| <b>keepalive</b>              | Trace keepalive messages.                |
| <b>normal</b>                 | Trace normal events.                     |
| <b>packets</b>                | Trace all MSDP packets.                  |
| <b>policy</b>                 | Trace policy processing.                 |
| <b>route</b>                  | Trace MSDP changes to the routing table. |
| <b>source-active</b>          | Trace source-active packets.             |
| <b>source-active-request</b>  | Trace source-active request packets.     |
| <b>source-active-response</b> | Trace source-active response packets.    |
| <b>state</b>                  | Trace state transitions.                 |
| <b>task</b>                   | Trace task processing.                   |
| <b>timer</b>                  | Trace timer processing.                  |

You can configure MSDP tracing for all peers, for all peers in a particular group, or for a particular peer.

In the following example, tracing is enabled for all routing protocol packets. Then tracing is narrowed to focus only on MSDP peers in a particular group. To configure tracing operations for MSDP:

1. (Optional) Configure tracing by including the **traceoptions** statement at the **[edit routing-options]** hierarchy level and set the **all-packets-trace** and **all** flags to trace all protocol packets.

```
[edit routing-options traceoptions]
user@host# set file all-packets-trace
user@host# set flag all
```

2. Configure the filename for the MSDP trace file.

```
[edit protocols msdp group groupa traceoptions]
user@host# set file msdp-trace
```

3. (Optional) Configure the maximum number of trace files.

```
[edit protocols msdp group groupa traceoptions]
user@host# set file files 5
```

4. (Optional) Configure the maximum size of each trace file.

```
[edit protocols msdp group groupa traceoptions]
```



```
user@host# set file size 1m
```

5. (Optional) Enable unrestricted file access.

```
[edit protocols msdp group groupa traceoptions]
```

```
user@host# set file world-readable
```

6. Configure tracing flags. Suppose you are troubleshooting issues with the source-active cache for **groupa**. The following example shows how to trace messages associated with the group address.

```
[edit protocols msdp group groupa traceoptions]
```

```
user@host# set flag source-active | match 230.0.0.3
```

7. View the trace file.

```
user@host> file list /var/log
```

```
user@host> file show /var/log/msdp-trace
```

#### Related Documentation

- [Understanding MSDP on page 3678](#)
- Junos OS Tracing and Logging Operations in the Junos OS System Basics Configuration Guide

## Configuring the Interface to Accept Traffic from a Remote Source

You can configure an incoming interface to accept traffic from a remote source. A remote source is a source that is not on the same subnet as the incoming interface. This enables the remote source to be learned and advertised by MSDP so that receivers in other MSDP areas can join the source. You do not need to disable RPF checking, but you do need to ensure that the best path to reach the remote source is through the incoming interface.

In this sample configuration, the incoming interface (**ge-1/3/0**) is on a provider edge (PE) router on the receiver side of a multicast VPN.

To accept traffic from a remote source:

1. Edit the incoming interface.

```
[edit protocols pim interface ge-1/3/0.0]
```

```
user@host# set accept-remote-source
```

2. If the incoming interface is not the only way to reach the remote source, ensure that the best path to reach the remote source is through the incoming interface. One way to do this is to use AS path prepending on the other possible routes.

```
[edit policy-options policy-statement as-path-prepend term prepend]
```

```
user@host# set from route-filter 192.168.0.0/16 orlonger
```

```
user@host# set from route-filter 172.16.0.0/16 orlonger
```

```
user@host# set then as-path-prepend "1111"
```

Another way to do this might be to configure a static route on the receiver side PE router to the source.

4. After the configuration is committed, use the **show pim statistics** and **show msdp source** commands to verify that the interface is accepting traffic from the remote source.



- Related Documentation**
- [Example: Allowing MBGP MVPN Remote Sources](#)
  - [Prepending AS Numbers to BGP AS Paths in the Routing Policy Configuration Guide](#)
  - [show msdp source on page 3982](#) in the Junos OS Operational Mode Commands
  - [show pim statistics on page 4050](#) in the Junos OS Operational Mode Commands

## Example: Configuring MSDP

Configure a router to act as a PIM sparse-mode rendezvous point and an MSDP peer:

```
[edit]
routing-options {
  interface-routes {
    rib-group ifrg;
  }
  rib-groups {
    ifrg {
      import-rib [inet.0 inet.2];
    }
    mcrg {
      export-rib inet.2;
      import-rib inet.2;
    }
  }
}
protocols {
  bgp {
    group lab {
      type internal;
      family any;
      neighbor 192.168.6.18 {
        local-address 192.168.6.17;
      }
    }
  }
}
pim {
  dense-groups {
    224.0.1.39/32;
    224.0.1.40/32;
  }
  rib-group mcrg;
  rp {
    local {
      address 192.168.1.1;
    }
  }
  interface all {
    mode sparse-dense;
    version 1;
  }
}
msdp {
  rib-group mcrg;
```



```

group lab {
  peer 192.168.6.18 {
    local-address 192.168.6.17;
  }
}

```

## Example: Configuring MSDP with Active Source Limits and Mesh Groups

This example shows how to configure MSDP to filter source-active messages and limit the flooding of source-active messages.

- [Requirements on page 3773](#)
- [Overview on page 3773](#)
- [Configuration on page 3777](#)
- [Verification on page 3779](#)

### Requirements

Before you begin:

- Configure the router interfaces. See the Junos® OS Network Interfaces.
- Configure an interior gateway protocol or static routing. See the Junos OS Routing Protocols Configuration Guide.
- Enable PIM sparse mode. See “[PIM Overview](#)” on page 3651.
- Configure the router as a PIM sparse-mode RP. See “[Configuring Local PIM RPs](#)” on page 3705.

### Overview

A router interested in MSDP messages, such as an RP, might have to process a large number of MSDP messages, especially source-active messages, arriving from other routers. Because of the potential need for a router to examine, process, and create state tables for many MSDP packets, there is a possibility of an MSDP-based denial-of-service (DoS) attack on a router running MSDP. To minimize this possibility, you can configure the router to limit the number of source active messages the router accepts. Also, you can configure a threshold for applying random early discard (RED) to drop some but not all MSDP active source messages. Beginning with Junos OS 12.2, you can optionally configure a warning threshold so the device can log warning messages in the system log when a certain number of source-active messages have been received. It is helpful to review the system log messages for troubleshooting purposes and to detect if an excessive amount of source-active messages have been received. These log messages convey when the configured message limit has been exceeded, when the configured warning threshold has been exceeded, and when the number of messages drop below the configured warning threshold.

By default, the router accepts 25,000 source active messages before ignoring the rest. The limit can be from 1 through 1,000,000. The limit is applied to both the number of messages and the number of MSDP peers.



By default, the router accepts 24,000 source-active messages before applying the RED profile to prevent a possible DoS attack. This number can also range from 1 through 1,000,000. The next 1000 messages are screened by the RED profile and the accepted messages processed. If you configure no drop profiles (as this example does not), RED is still in effect and functions as the primary mechanism for managing congestion. In the default RED drop profile, when the packet queue fill-level is 0 percent, the drop probability is 0 percent. When the fill-level is 100 percent, the drop probability is 100 percent.



**NOTE:** The router ignores source-active messages with encapsulated TCP packets. Multicast does not use TCP; segments inside source-active messages are most likely the result of worm activity.

The number configured for the threshold must be less than the number configured for the maximum number of active MSDP sources.

The warning threshold is a percentage of maximum number of MSDP source-active messages received, so you must configure the source-active message limit to configure a warning threshold. The range for the warning threshold is 1 through 100 percent. You can further specify the amount of time (in seconds) between the log messages. The range is 6 through 32,767 seconds.

You can configure an active source limit globally, for a group, or for a peer. If active source limits are configured at multiple levels of the hierarchy (as shown in this example), all are applied.

You can configure an active source limit for an address range as well as for a specific peer. A per-source active source limit uses an IP prefix and prefix length instead of a specific address. You can configure more than one per-source active source limit. The longest match determines the limit.

Per-source active source limits can be combined with active source limits at the peer, group, and global (instance) hierarchy level. Per-source limits are applied before any other type of active source limit. Limits are tested in the following order:

- Per-source
- Per-peer or group
- Per-instance

An active source message must “pass” all limits established before being accepted. For example, if a source is configured with an active source limit of 10,000 active multicast groups and the instance is configured with a limit of 5000 (and there are no other sources or limits configured), only 5000 active source messages are accepted from this source.

MSDP mesh groups are groups of peers configured in a full-mesh topology that limits the flooding of source-active messages to neighboring peers. Every mesh group member must have a peer connection with every other mesh group member. When a source-active message is received from a mesh group member, the source-active message is always accepted but is not flooded to other members of the same mesh group. However, the



source-active message is flooded to non-mesh group peers or members of other mesh groups. By default, standard flooding rules apply if **mesh-group** is not specified.



**CAUTION:** When configuring MSDP mesh groups, you must configure all members the same way. If you do not configure a full mesh, excessive flooding of source-active messages can occur.

A common application for MSDP mesh groups is peer-reverse-path-forwarding (peer-RPF) check bypass. For example, if there are two MSDP peers inside an autonomous system (AS), and only one of them has an external MSDP session to another AS, the internal MSDP peer often rejects incoming source-active messages relayed by the peer with the external link. Rejection occurs because the external MSDP peer must be reachable by the internal MSDP peer through the next hop toward the source in another AS, and this next-hop condition is not certain. To prevent rejections, configure an MSDP mesh group on the internal MSDP peer so it always accepts source-active messages.



**NOTE:** An alternative way to bypass the peer-RPF check is to configure a default peer. In networks with only one MSDP peer, especially stub networks, the source-active message always needs to be accepted. An MSDP default peer is an MSDP peer from which all source-active messages are accepted without performing the peer-RPF check. You can establish a default peer at the peer or group level by including the **default-peer** statement.


Table 242 on page 3775 explains how flooding is handled by peers in this example. Figure 139 on page 3776 illustrates source-active message flooding between different mesh groups and peers within the same mesh group.

**Table 242: Source-Active Message Flooding Explanation**

| Source-Active Message Received From | Source-Active Message Flooded To                     | Source-Active Message Not Flooded To |
|-------------------------------------|------------------------------------------------------|--------------------------------------|
| Peer 21                             | Peer 11, Peer 12, Peer 13, Peer 31, Peer 32          | Peer 22                              |
| Peer 11                             | Peer 21, Peer 22, Peer 31, Peer 32                   | Peer 12, Peer 13                     |
| Peer 31                             | Peer 21, Peer 22, Peer 11, Peer 12, Peer 13, Peer 32 | —                                    |



Figure 139: Source-Active Message Flooding

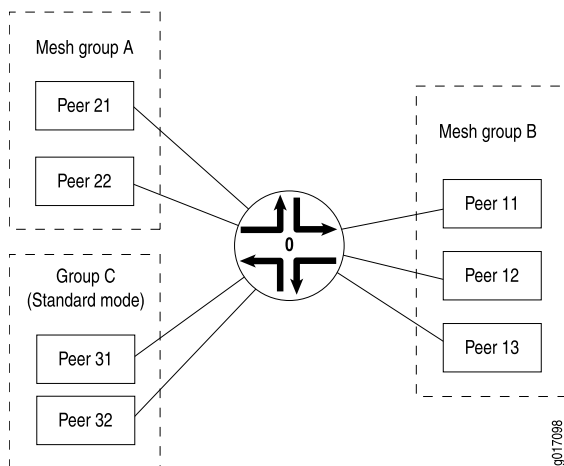

This example includes the following settings:

- **active-source-limit maximum 10000**—Applies a limit of 10,000 active sources to all other peers.
- **active-source-limit log-warning 80**—(Optional) Applies a warning threshold of 80 percent. In this example, the active source maximum is 10,000, so the device will start logging warning messages once it receives 8,000 active source messages.
- **active-source-limit log-interval 20**—(Optional) Applies a 20 second waiting period between system log messages.
- **data-encapsulation disable**—On an RP router using MSDP, disables the default encapsulation of multicast data received in MSDP register messages inside MSDP source-active messages.

MSDP data encapsulation mainly concerns bursty sources of multicast traffic. Sources that send only one packet every few minutes have trouble with the timeout of state relationships between sources and their multicast groups (S,G). Routers lose data while they attempt to reestablish (S,G) state tables. As a result, multicast register messages contain data, and this data encapsulation in MSDP source-active messages can be turned on or off through configuration.

By default, MSDP data encapsulation is enabled. An RP running MSDP takes the data packets arriving in the source's register message and encapsulates the data inside an MSDP source-active message.

However, data encapsulation creates both a multicast forwarding cache entry in the **inet.1** table (this is also the forwarding table) and a routing table entry in the **inet.4** table. Without data encapsulation, MSDP creates only a routing table entry in the **inet.4** table. In some circumstances, such as the presence of Internet worms or other forms of DoS attack, the router's forwarding table might fill up with these entries. To prevent the forwarding table from filling up with MSDP entries, you can configure the router not to use MSDP data encapsulation. However, if you disable data encapsulation, the router ignores and discards the encapsulated data. Without data encapsulation,



multicast applications with bursty sources having transmit intervals greater than about 3 minutes might not work well.

- **group MSDP-group local-address 10.1.2.3**—Specifies the address of the local router (this router).
- **group MSDP-group mode mesh-group**—Specifies that all peers belonging to the MSDP-group group are mesh group members.
- **group MSDP-group peer 10.10.10.10**—Prevents the sending of source-active messages to neighboring peer 10.10.10.10.
- **group MSDP-group peer 10.10.10.10 active-source-limit maximum 7500**—Applies a limit of 7500 active sources to MSDP peer 10.10.10.10 in group **MSDP-group**.
- **peer 10.0.0.1 active-source-limit maximum 5000 threshold 4000**—Applies a threshold of 4000 active sources and a limit of 5000 active sources to MSDP peer 10.0.0.1.
- **source 10.1.0.0/16 active-source-limit maximum 500**—Applies a limit of 500 active sources to any source on the 10.1.0.0/16 network.

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set protocols msdp data-encapsulation disable
set protocols msdp active-source-limit maximum 10000
set protocols msdp active-source-limit log-warning 80
set protocols msdp active-source-limit log-interval 20
set protocols msdp peer 10.0.0.1 active-source-limit maximum 5000
set protocols msdp peer 10.0.0.1 active-source-limit threshold 4000
set protocols msdp source 10.1.0.0/16 active-source-limit maximum 500
set protocols msdp group MSDP-group mode mesh-group
set protocols msdp group MSDP-group local-address 10.1.2.3
set protocols msdp group MSDP-group peer 10.10.10.10 active-source-limit maximum
7500
```

#### Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure MSDP source active routes and mesh groups:

1. (Optional) Disable data encapsulation.

```
[edit protocols msdp]
user@host# set data-encapsulation disable
```

2. Configure the active source limits.

```
[edit protocols msdp]
user@host# set peer 10.0.0.1 active-source-limit maximum 5000 threshold 4000
```



```
user@host# set group MSDP-group peer 10.10.10.10 active-source-limit maximum 7500
```

```
user@host# set active-source-limit maximum 10000
```

```
user@host# set source 10.1.0.0/16 active-source-limit maximum 500
```

3. (Optional) Configure the threshold at which warning messages are logged and the amount of time between log messages.

```
[edit protocols msdp]
```

```
user@host# set active-source-limit log-warning 80
```

```
user@host# set active-source-limit log-interval 20
```

4. Configure the mesh group.

```
[edit protocols msdp]
```

```
user@host# set group MSDP-group mode mesh-group
```

```
user@host# set group MSDP-group peer 10.10.10.10
```

```
user@host# set group MSDP-group local-address 10.1.2.3
```

5. If you are done configuring the device, commit the configuration.

```
[edit routing-instances]
```

```
user@host# commit
```

## Results

Confirm your configuration by entering the **show protocols** command.

```
user@host# show protocols
msdp {
  data-encapsulation disable;
  active-source-limit {
    maximum 10000;
    log-warning 80;
    log-interval 20;
  }
  peer 10.0.0.1 {
    active-source-limit {
      maximum 5000;
      threshold 4000;
    }
  }
  source 10.1.0.0/16 {
    active-source-limit {
      maximum 500;
    }
  }
  group MSDP-group {
    mode mesh-group;
    local-address 10.1.2.3;
    peer 10.10.10.10 {
      active-source-limit {
        maximum 7500;
      }
    }
  }
}
```



## Verification

To verify the configuration, run the following commands:

- `show msdp source-active`
- `show msdp statistics`

## Related Documentation

- [Example: Configuring MSDP in a Routing Instance](#)
- [Filtering MSDP SA Messages on page 3679](#)
- [Configuring RED Drop Profiles in the Junos OS Class of Service Configuration Guide](#)
- [Configuring Local PIM RPs on page 3705](#)

## Example: Configuring PIM Anycast With or Without MSDP

When you configure anycast RP, you bypass the restriction of having one active rendezvous point (RP) per multicast group, and instead deploy multiple RPs for the same group range. The RP routers share one unicast IP address. Sources from one RP are known to other RPs that use the Multicast Source Discovery Protocol (MSDP). Sources and receivers use the closest RP, as determined by the interior gateway protocol (IGP).

You can use anycast RP within a domain to provide redundancy and RP load sharing. When an RP stops operating, sources and receivers are taken to a new RP by means of unicast routing.

You can configure anycast RP to use PIM and MSDP for IPv4, or PIM alone for both IPv4 and IPv6 scenarios. Both are discussed in this section.

We recommend a static RP mapping with anycast RP over a bootstrap router and auto-RP configuration because it provides all the benefits of a bootstrap router and auto-RP without the complexity of the BSR and auto-RP mechanisms.

All systems on a subnet must run the same version of PIM.

The default PIM version can be version 1 or version 2, depending on the mode you are configuring. PIMv1 is the default RP mode (at the `[edit protocols pim rp static address address]` hierarchy level). However, PIMv2 is the default for interface mode (at the `[edit protocols pim interface interface-name]` hierarchy level). Explicitly configured versions override the defaults. This example explicitly configures PIMv2 on the interfaces.

The following example shows an anycast RP configuration for the RP routers, first with MSDP and then using PIM alone, and for non-RP routers.

1. For a network using an RP with MSDP, configure the RP using the `lo0` loopback interface, which is always up. Include the `address` statement and specify the unique and routable router ID and the RP address at the `[edit interfaces lo0 unit 0 family inet]` hierarchy level. In this example, the router ID is `198.58.3.254` and the shared RP address is `198.58.3.253`. Include the `primary` statement for the first address. Including the



**primary** statement selects the router's primary address from all the preferred addresses on all interfaces.

```
interfaces {
  lo0 {
    description "PIM RP";
    unit 0 {
      family inet {
        address 198.58.3.254/32;
        primary;
        address 198.58.3.253/32;
      }
    }
  }
}
```

2. Specify the RP address. Include the **address** statement at the **[edit protocols pim rp local]** hierarchy level (the same address as the secondary **lo0** interface).

For all interfaces, include the **mode** statement to set the mode to **sparse** and the **version** statement to specify PIM version 2 at the **[edit protocols pim rp local interface all]** hierarchy level. When configuring all interfaces, exclude the **fxp0.0** management interface by including the **disable** statement for that interface.

```
protocols {
  pim {
    rp {
      local {
        family inet;
        address 198.58.3.253;
      }
      interface all {
        mode sparse;
        version 2;
      }
      interface fxp0.0 {
        disable;
      }
    }
  }
}
```

3. Configure MSDP peering. Include the **peer** statement to configure the address of the MSDP peer at the **[edit protocols msdp]** hierarchy level. For MSDP peering, use the unique, primary addresses instead of the anycast address. To specify the local address for MSDP peering, include the **local-address** statement at the **[edit protocols msdp peer]** hierarchy level.

```
protocols {
  msdp {
    peer 198.58.3.250 {
      local-address address 198.58.3.254;
    }
  }
}
```





**NOTE:** If you need to configure a PIM RP for both IPv4 and IPv6 scenarios, perform Step 4 and Step 5. Otherwise, go to Step 6.

4. Configure an RP using the **lo0** loopback interface, which is always up. Include the **address** statement to specify the unique and routable router address and the RP address at the **[edit interfaces lo0 unit 0 family inet]** hierarchy level. In this example, the router ID is **198.58.3.254** and the shared RP address is **198.58.3.253**. Include the **primary** statement on the first address. Including the **primary** statement selects the router's primary address from all the preferred addresses on all interfaces.

```
interfaces {
  lo0 {
    description "PIM RP";
    unit 0 {
      family inet {
        address 198.58.3.254/32 {
          primary;
        }
        address 198.58.3.253/32;
      }
    }
  }
}
```

5. Include the **address** statement at the **[edit protocols pim rp local]** hierarchy level to specify the RP address (the same address as the secondary **lo0** interface).

For all interfaces, include the **mode** statement to set the mode to **sparse**, and the **version** statement to specify PIM version 2 at the **[edit protocols pim rp local interface all]** hierarchy level. When configuring all interfaces, exclude the **fxp0.0** management interface by including the **disable** statement for that interface.

Include the **anycast-pim** statement to configure anycast RP without MSDP (for example, if IPv6 is used for multicasting). The other RP routers that share the same IP address are configured using the **rp-set** statement. There is one entry for each RP, and the maximum that can be configured is 15. For each RP, specify the routable IP address of the router and whether MSDP source active (SA) messages are forwarded to the RP.

MSDP configuration is not necessary for this type of IPv4 anycast RP configuration.

```
protocols {
  pim {
    rp {
      local {
        family inet {
          address 198.58.3.253;
          anycast-pim {
            rp-set {
              address 198.58.3.240;
              address 198.58.3.241 forward-msdp-sa;
            }
            local-address 198.58.3.254; #If not configured, use lo0 primary
          }
        }
      }
    }
  }
}
```



```
    }  
  }  
}  
interface all {  
  mode sparse;  
  version 2;  
}  
interface fxp0.0 {  
  disable;  
}  
}  
}
```

6. Configure the non-RP routers. The anycast RP configuration for a non-RP router is the same whether MSDP is used or not. Specify a static RP by adding the address at the **[edit protocols pim rp static]** hierarchy level. Include the **version** statement at the **[edit protocols pim rp static address]** hierarchy level to specify PIM version 2.

```
protocols {  
  pim {  
    rp {  
      static {  
        address 198.58.3.253 {  
          version 2;  
        }  
      }  
    }  
  }  
}
```

7. Include the **mode** statement at the **[edit protocols pim interface all]** hierarchy level to specify sparse mode on all interfaces. Then include the **version** statement at the **[edit protocols pim rp interface all mode]** to configure all interfaces for PIM version 2. When configuring all interfaces, exclude the **fxp0.0** management interface by including the **disable** statement for that interface.

```
protocols {  
  pim {  
    interface all {  
      mode sparse;  
      version 2;  
    }  
    interface fxp0.0 {  
      disable;  
    }  
  }  
}
```

## Configuring a PIM Anycast RP Router with MSDP

Add the **address** statement at the **[edit protocols pim rp local]** hierarchy level to specify the RP address (the same address as the secondary **lo0** interface).



For all interfaces, use the **mode** statement to set the mode to **sparse** and the **version** statement to specify PIM version 2 at the **[edit protocols pim rp local interface all]** hierarchy level. When configuring all interfaces, exclude the **fxp0.0** management interface by adding the **disable** statement for that interface.

```
protocols {
  pim {
    rp {
      local {
        family inet;
        address 198.58.3.253;
      }
      interface all {
        mode sparse;
        version 2;
      }
      interface fxp0.0 {
        disable;
      }
    }
  }
}
```

To configure MSDP peering, add the **peer** statement to configure the address of the MSDP peer at the **[edit protocols msdp]** hierarchy level. For MSDP peering, use the unique, primary addresses instead of the anycast address. To specify the local address for MSDP peering, add the **local-address** statement at the **[edit protocols msdp peer]** hierarchy level.

```
protocols {
  msdp {
    peer 198.58.3.250 {
      local-address 198.58.3.254;
    }
  }
}
```

## Source-Specific Multicast


- [Example: Configuring PIM SSM on a Network on page 3783](#)
- [Example: Configuring an SSM-Only Domain on page 3785](#)
- [Example: Configuring SSM Mapping on page 3785](#)
- [Example: Configuring Source-Specific Multicast Groups with Any-Source Override on page 3788](#)
- [Example: Configuring SSM Maps for Different Groups to Different Sources on page 3791](#)

### Example: Configuring PIM SSM on a Network

The following example shows how PIM SSM is configured between a receiver and a source in the network illustrated in [Figure 140 on page 3784](#).



Figure 140: Network on Which to Configure PIM SSM

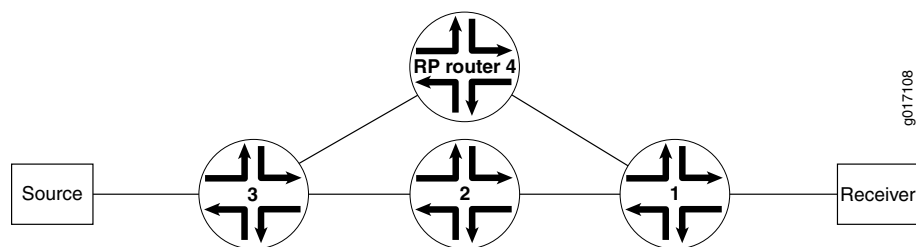

This example shows how to configure the IGMP version to IGMPv3 on all receiving host interfaces.

1. Enable IGMPv3 on all host-facing interfaces, and disable IGMP on the **fxp0.0** interface on Router 1.

```

user@router1# set protocols igmp interface all version 3
user@router1# set protocols igmp interface fxp0.0 disable

```



**NOTE:** When you configure IGMPv3 on a router, hosts on interfaces configured with IGMPv2 cannot join the source tree.

2. After the configuration is committed, use the **show configuration protocol igmp** command to verify the IGMP protocol configuration.

```

user@router1> show configuration protocol igmp

[edit protocols igmp]
interface all {
    version 3;
}
interface fxp0.0 {
    disable;
}

```

3. Use the **show igmp interface** command to verify that IGMP interfaces are configured.

```

user@router1> show igmp interface
Interface      State    Querier      Timeout  Version  Groups
fe-0/0/0.0     Up       198.58.3.245  213      3         0
fe-0/0/1.0     Up       198.58.3.241  220      3         0
fe-0/0/2.0     Up       198.58.3.237  218      3         0
Configured Parameters:
IGMP Query Interval (1/10 secs): 1250
IGMP Query Response Interval (1/10 secs): 100
IGMP Last Member Query Interval (1/10 secs): 10
IGMP Robustness Count: 2
Derived Parameters:
IGMP Membership Timeout (1/10 secs): 2600
IGMP Other Querier Present Timeout (1/10 secs): 2550

```

4. Use the **show pim join extensive** command to verify the PIM join state on Router 2 and Router 3 (the upstream routers).

```

user@router2> show pim join extensive
232.1.1.1      10.4.1.2      sparse
Upstream interface: fe-1/1/3.0

```



```

Upstream State: Local Source
Keepalive timeout: 209
Downstream Neighbors:
  Interface: so-1/0/2.0
    10.10.71.1      State: Join   Flags: S   Timeout: 209

```

5. Use the **show pim join extensive** command to verify the PIM join state on Router 1 (the router connected to the receiver).

```

user@router1> show pim join extensive
232.1.1.1      10.4.1.2      sparse
Upstream interface: so-1/0/2.0
Upstream State: Join to Source
Keepalive timeout: 209
Downstream Neighbors:
  Interface: fe-0/2/3.0
    10.3.1.1      State: Join   Flags: S   Timeout: Infinity

```

### Example: Configuring an SSM-Only Domain

Deploying an SSM-only domain is much simpler than deploying an ASM domain because it only requires a few configuration steps. Enable PIM sparse mode on all interfaces by adding the **mode** statement at the **[edit protocols pim interface all]** hierarchy level. When configuring all interfaces, exclude the **fxp0.0** management interface by adding the **disable** statement for that interface. Then configure IGMPv3 on all host-facing interfaces by adding the **version** statement at the **[edit protocols igmp interface *interface-name*]** hierarchy level.

In the following example, the host-facing interface is **fe-0/1/2**:

```

[edit]
protocols {
  pim {
    interface all {
      mode sparse;
      version 2;
    }
    interface fxp0.0 {
      disable;
    }
  }
  igmp {
    interface fe-0/1/2 {
      version 3;
    }
  }
}

```

### Example: Configuring SSM Mapping

SSM mapping does not require that all hosts support IGMPv3. SSM mapping translates IGMPv1 or IGMPv2 membership reports to an IGMPv3 report. This enables hosts running IGMPv1 or IGMPv2 to participate in SSM until the hosts transition to IGMPv3.



SSM mapping applies to all group addresses that match the policy, not just those that conform to SSM addressing conventions (232/8 for IPv4, ff30::/32 through ff3F::/32 for IPv6).

We recommend separate SSM maps for IPv4 and IPv6 if both address families require SSM support. If you apply an SSM map containing both IPv4 and IPv6 addresses to an interface in an IPv4 context (using IGMP), only the IPv4 addresses in the list are used. If there are no such addresses, no action is taken. Similarly, if you apply an SSM map containing both IPv4 and IPv6 addresses to an interface in an IPv6 context (using MLD), only the IPv6 addresses in the list are used. If there are no such addresses, no action is taken.

In this example, you create a policy to match the group addresses that you want to translate to IGMPv3. Then you define the SSM map that associates the policy with the source addresses where these group addresses are found. Finally, you apply the SSM map to one or more IGMP (for IPv4) or MLD (for IPv6) interfaces.

1. Create an SSM policy named **ssm-policy-example**. The policy terms match the IPv4 SSM group address 232.1.1.1/32 and the IPv6 SSM group address ff35::1/128. All other addresses are rejected.

```
user@router1# set policy-options policy-statement ssm-policy-example term A from
route-filter 232.1.1.1/32 exact
user@router1# set policy-options policy-statement ssm-policy-example term A then
accept
user@router1# set policy-options policy-statement ssm-policy-example term B from
route-filter ff35::1/128 exact
user@router1# set policy-options policy-statement ssm-policy-example term B then
accept
```

2. After the configuration is committed, use the **show configuration policy-options** command to verify the policy configuration.

```
user@host> show configuration policy-options

[edit policy-options]
policy-statement ssm-policy-example {
  term A {
    from {
      route-filter 232.1.1.1/32 exact;
    }
    then accept;
  }
  term B {
    from {
      route-filter ff35::1/128 exact;
    }
    then accept;
  }
  then reject;
}
```

The group addresses must match the configured policy for SSM mapping to occur.



3. Define two SSM maps, one called **ssm-map-ipv6-example** and one called **ssm-map-ipv4-example**, by applying the policy and configuring the source addresses as a multicast routing option.

```

user@host# set routing-options multicast ssm-map ssm-map-ipv6-example policy
ssm-policy-example
user@host# set routing-options multicast ssm-map ssm-map-ipv6-example source
fec0::1 fec0::12
user@host# set routing-options multicast ssm-map ssm-map-ipv4-example policy
ssm-policy-example
user@host# set routing-options multicast ssm-map ssm-map-ipv4-example source
10.10.10.4
user@host# set routing-options multicast ssm-map ssm-map-ipv4-example source
192.168.43.66

```

4. After the configuration is committed, use the **show configuration routing-options** command to verify the policy configuration.

```

user@host> show configuration routing-options

[edit routing-options]
multicast {
  ssm-map ssm-map-ipv6-example {
    policy ssm-policy-example;
    source [ fec0::1 fec0::12 ];
  }
  ssm-map ssm-map-ipv4-example {
    policy ssm-policy-example;
    source [ 10.10.10.4 192.168.43.66 ];
  }
}

```

We recommend separate SSM maps for IPv4 and IPv6.

5. Apply SSM maps for IPv4-to-IGMP interfaces and SSM maps for IPv6-to-MLD interfaces:

```

user@host# set protocols igmp interface fe-0/1/0.0 ssm-map ssm-map-ipv4-example
user@host# set protocols mld interface fe-0/1/1.0 ssm-map ssm-map-ipv6-example

```

6. After the configuration is committed, use the **show configuration protocol** command to verify the IGMP and MLD protocol configuration.

```

user@router1> show configuration protocol

[edit protocols]
igmp {
  interface fe-0/1/0.0 {
    ssm-map ssm-map-ipv4-example;
  }
}
mld {
  interface fe-0/1/1.0 {
    ssm-map ssm-map-ipv6-example;
  }
}

```

7. Use the **show igmp interface** and the **show mld interface** commands to verify that the SSM maps are applied to the interfaces.



```
user@host> show igmp interface fe-0/1/0.0
Interface: fe-0/1/0.0
  Querier: 192.168.224.28
  State:      Up Timeout:      None Version:  2 Groups:  2
  SSM Map: ssm-map-ipv4-example

user@host> show mld interface fe-0/1/1.0
Interface: fe-0/1/1.0
  Querier: fec0:0:0:0:1::12
  State:      Up Timeout:      None Version:  2 Groups:  2
  SSM Map: ssm-map-ipv6-example
```

## Example: Configuring Source-Specific Multicast Groups with Any-Source Override

This example shows how to extend source-specific multicast (SSM) group operations beyond the default IP address range of 232.0.0.0 through 232.255.255.255. This example also shows how to accept any-source multicast (ASM) join messages (\*G) for group addresses that are within the default or configured range of SSM groups. This allows you to support a mix of any-source and source-specific multicast groups simultaneously.

- [Requirements on page 3788](#)
- [Overview on page 3788](#)
- [Configuration on page 3790](#)
- [Verification on page 3791](#)

---

### Requirements

Before you begin, configure the router interfaces. See the Junos® OS Network Interfaces.

---


### Overview

To deploy SSM, configure PIM sparse mode on all routing device interfaces and issue the necessary SSM commands, including specifying IGMPv3 or MLDv2 on the receiver's LAN. If PIM sparse mode is not explicitly configured on both the source and group members interfaces, multicast packets are not forwarded. Source lists, supported in IGMPv3 and MLDv2, are used in PIM SSM. Only sources that are specified send traffic to the SSM group.

In a PIM SSM-configured network, a host subscribes to an SSM channel (by means of IGMPv3 or MLDv2) to join group G and source S (see [Figure 141 on page 3789](#)). The directly connected PIM sparse-mode router, the receiver's designated router (DR), sends an (S,G) join message to its reverse-path forwarding (RPF) neighbor for the source. Notice in [Figure 141 on page 3789](#) that the RP is not contacted in this process by the receiver, as would be the case in normal PIM sparse-mode operations.




Figure 141: Receiver Sends Messages to Join Group G and Source S

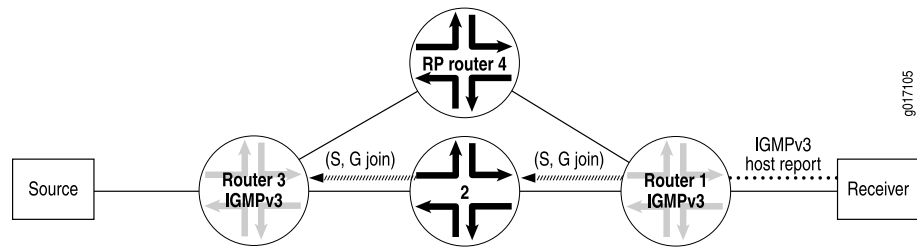


The (S,G) join message initiates the source tree and then builds it out hop by hop until it reaches the source. In [Figure 142 on page 3789](#), the source tree is built across the network to Router 3, the last-hop router connected to the source.

Figure 142: Router 3 (Last-Hop Router) Joins the Source Tree

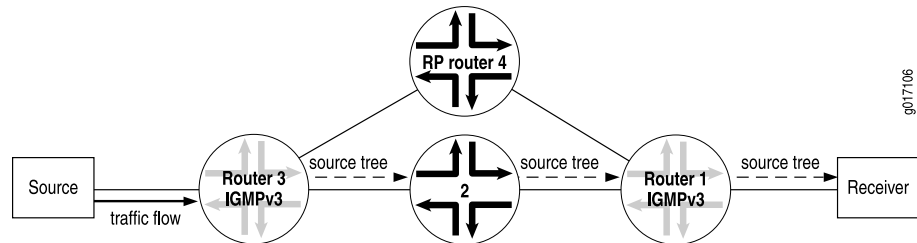

Using the source tree, multicast traffic is delivered to the subscribing host (see [Figure 143 on page 3789](#)).


Figure 143: (S,G) State Is Built Between the Source and the Receiver

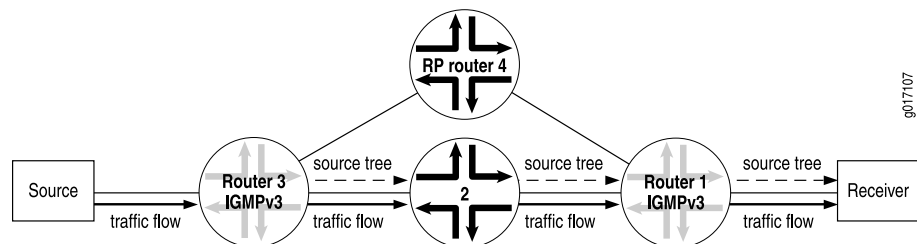

SSM can operate in include mode or in exclude mode. In exclude mode the receiver specifies a list of sources that it does not want to receive the multicast group traffic from. The routing device forwards traffic to the receiver from any source except the sources specified in the exclusion list. The receiver accepts traffic from any sources except the sources specified in the exclusion list.

This example works with the simple RPF topology shown in [Figure 144 on page 3789](#).

Figure 144: Simple RPF Topology

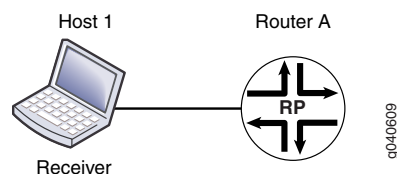



## Configuration

---

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set protocols ospf area 0.0.0.0 interface fxp0.0 disable
set protocols ospf area 0.0.0.0 interface all
set protocols pim rp local address 10.255.72.46
set protocols pim rp local group-ranges 239.0.0.0/24
set protocols pim interface fe-1/0/0.0 mode sparse
set protocols pim interface lo0.0 mode sparse
set routing-options multicast ssm-groups 232.0.0.0/8
set routing-options multicast ssm-groups 239.0.0.0/8
set routing-options multicast asm-override-ssm
```

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure an RPF policy:

1. Configure OSPF.

```
[edit protocols ospf]
user@host# set area 0.0.0.0 interface fxp0.0 disable
user@host# set area 0.0.0.0 interface all
```

2. Configure PIM sparse mode.

```
[edit protocols pim]
user@host# set rp local address 10.255.72.46
user@host# set rp local group-ranges 239.0.0.0/24
user@host# set interface fe-1/0/0.0 mode sparse
user@host# set interface lo0.0 mode sparse
```

3. Configure additional SSM groups.

```
[edit routing-options]
user@host# set ssm-groups [ 232.0.0.0/8 239.0.0.0/8 ]
```

4. Configure the RP to accept ASM join messages for groups within the SSM address range.

```
[edit routing-options]
user@host# set multicast asm-override-ssm
```

5. If you are done configuring the device, commit the configuration.

```
user@host# commit
```

## Results

Confirm your configuration by entering the **show protocols** and **show routing-options** commands.



```

user@host# show protocols
ospf {
  area 0.0.0.0 {
    interface fxp0.0 {
      disable;
    }
    interface all;
  }
}
pim {
  rp {
    local {
      address 10.255.72.46;
      group-ranges {
        239.0.0.0/24;
      }
    }
  }
  interface fe-1/0/0.0 {
    mode sparse;
  }
  interface lo0.0 {
    mode sparse;
  }
}

user@host# show routing-options
multicast {
  ssm-groups [ 232.0.0.0/8 239.0.0.0/8 ];
  asm-override-ssm;
}

```

### Verification

To verify the configuration, run the following commands:

- [show igmp group](#)
- [show igmp statistics](#)
- [show pim join](#)

### Related Documentation

- [Source-Specific Multicast Groups Overview on page 3680](#)

## Example: Configuring SSM Maps for Different Groups to Different Sources

- [Multiple SSM Maps and Groups for Interfaces on page 3791](#)
- [Example: Configuring Multiple SSM Maps Per Interface on page 3792](#)

### Multiple SSM Maps and Groups for Interfaces

You can configure multiple source-specific multicast (SSM) maps so that different groups map to different sources, which enables a single multicast group to map to different sources for different interfaces.



### Example: Configuring Multiple SSM Maps Per Interface

This example shows how to assign more than one SSM map to an IGMP interface.

- [Requirements on page 3792](#)
- [Overview on page 3792](#)
- [Configuration on page 3792](#)
- [Verification on page 3794](#)

#### Requirements

This example requires Junos OS Release 11.4 or later.

#### Overview

In this example, you configure a routing policy, POLICY-ipv4-example1, that maps multicast group join messages over an IGMP logical interface to IPv4 multicast source addresses based on destination IP address as follows:

| Routing Policy Name         | Multicast Group Join Messages for a Route Filter at This Destination Address | Multicast Source Addresses   |
|-----------------------------|------------------------------------------------------------------------------|------------------------------|
| POLICY-ipv4-example1 term 1 | 232.1.1.1                                                                    | 10.10.10.4,<br>192.168.43.66 |
| POLICY-ipv4-example1 term 2 | 232.1.1.2                                                                    | 10.10.10.5,<br>192.168.43.67 |

You apply routing policy POLICY-ipv4-example1 to IGMP logical interface fe-0/1/0.0.

#### Configuration

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see the CLI User Guide.

To configure this example, perform the following task:

#### CLI Quick Configuration

To quickly configure this example, copy the following configuration commands into a text file, remove any line breaks, and then paste the commands into the CLI at the [edit] hierarchy level.

```
set policy-options policy-statement POLICY-ipv4-example1 term 1 from route-filter
  232.1.1.1/32 exact
set policy-options policy-statement POLICY-ipv4-example1 term 1 then ssm-source
  10.10.10.4
set policy-options policy-statement POLICY-ipv4-example1 term 1 then ssm-source
  192.168.43.66
set policy-options policy-statement POLICY-ipv4-example1 term 1 then accept
set policy-options policy-statement POLICY-ipv4-example1 term 2 from route-filter
  232.1.1.2/32 exact
set policy-options policy-statement POLICY-ipv4-example1 term 2 then ssm-source
  10.10.10.5
```



```

set policy-options policy-statement POLICY-ipv4-example1 term 2 then ssm-source
192.168.43.67
set policy-options policy-statement POLICY-ipv4-example1 term 2 then accept
set protocols igmp interface fe-0/1/0.0 ssm-map-policy POLICY-ipv4-example1

```

### Step-by-Step Procedure

To configure multiple SSM maps per interface:

1. Configure protocol-independent routing options for route filter 232.1.1.1, and specify the multicast source addresses to which matching multicast groups are to be mapped.

```

[edit policy-options policy-statement POLICY-ipv4-example1 term 1]
user@host# set from route-filter 232.1.1.1/32 exact
user@host# set then ssm-source 10.10.10.4
user@host# set then ssm-source 192.168.43.66
user@host# set then accept

```

2. Configure protocol-independent routing options for route filter 232.1.1.2, and specify the multicast source addresses to which matching multicast groups are to be mapped.

```

[edit policy-options policy-statement POLICY-ipv4-example1 term 2]
user@host# set from route-filter 232.1.1.2/32 exact
user@host# set then ssm-source 10.10.10.5
user@host# set then ssm-source 192.168.43.67
user@host# set then accept

```

3. Apply the policy map POLICY-ipv4-example1 to IGMP logical interface fe-0/1/1/0.

```

[edit protocols igmp interface fe-0/1/0.0]
user@host# set ssm-map-policy POLICY-ipv4-example1

```

**Results** After the configuration is committed, confirm the configuration by entering the **show policy-options** and **show protocols** configuration mode commands. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```

user@host#> show policy-options
policy-statement POLICY-ipv4-example1 {
  term 1 {
    from {
      route-filter 232.1.1.1/32 exact;
    }
    then {
      ssm-source [ 10.10.10.4 192.168.43.66 ];
      accept;
    }
  }
  term 2 {
    from {
      route-filter 232.1.1.2/32 exact;
    }
    then {
      ssm-source [ 10.10.10.5 192.168.43.67 ];
      accept;
    }
  }
}

```



```
}  
  
user@host# show protocols  
igmp {  
  interface fe-0/1/0.0 {  
    ssm-map-policy POLICY-ipv4-example1;  
  }  
}
```

### **Verification**

Confirm that the configuration is working properly.

- [Displaying Information About IGMP-Enabled Interfaces on page 3794](#)
- [Displaying the PIM Groups on page 3794](#)
- [Displaying the Entries in the IP Multicast Forwarding Table on page 3794](#)

### **Displaying Information About IGMP-Enabled Interfaces**

**Purpose** Verify that the SSM map policy POLICY-ipv4-example1 is applied to logical interface fe-0/1/0.0.

**Action** Use the [show igmp interface](#) operational mode command for the IGMP logical interface to which you applied the SSM map policy.

```
user@host> show igmp interface  
Interface: fe-0/1/0.0  
  Querier: 10.111.30.1  
  State:      Up Timeout:   None Version:  2 Groups:      2  
  SSM Map Policy: POLICY-ipv4-example1;
```

```
Configured Parameters:  
IGMP Query Interval: 125.0  
IGMP Query Response Interval: 10.0  
IGMP Last Member Query Interval: 1.0  
IGMP Robustness Count: 2
```

```
Derived Parameters:  
IGMP Membership Timeout: 260.0  
IGMP Other Querier Present Timeout: 255.0
```

The command output displays the name of IGMP logical interface (fe-0/1/0.0), the address of the routing device that has been elected to send membership queries and group information.

### **Displaying the PIM Groups**

**Purpose** Verify the Protocol Independent Multicast (PIM) source and group pair (S,G) entries.

**Action** Use the [show pim join extensive 232.1.1.1](#) operational mode command to display the PIM source and group pair (S,G) entries for the 232.1.1.1 group.

### **Displaying the Entries in the IP Multicast Forwarding Table**

**Purpose** Verify that the IP multicast forwarding table displays the mroute state.



**Action** Use the `show multicast route extensive` operational mode command to display the entries in the IP multicast forwarding table to verify that the **Route state** is active and that the **Forwarding state** is forwarding.

**Related Documentation**

- Example: Configuring Source-Specific Multicast
- Example: Configuring Source-Specific Draft-Rosen 7 Multicast VPNs

## PIM Configuration Statements

### address (Anycast RPs)

**Syntax** `address address <forward-msdp-sa>;`

**Hierarchy Level** [edit logical-systems *logical-system-name* protocols pim **rp local** (inet | inet6) **anycast-pim rp-set**],  
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols pim **rp local** (inet | inet6) **anycast-pim rp-set**],  
[edit protocols pim **rp local** (inet | inet6) **anycast-pim rp-set**],  
[edit routing-instances *routing-instance-name* protocols pim **rp local** (inet | inet6) **anycast-pim rp-set**]

**Release Information** Statement introduced in Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Configure the anycast rendezvous point (RP) addresses in the RP set. Multiple addresses can be configured in an RP set. If the RP has peer Multicast Source Discovery Protocol (MSDP) connections, then the RP must forward MSDP source active (SA) messages.

**Options** *address*—RP address in an RP set.  
*forward-msdp-sa*—(Optional) Forward MSDP SAs to this address.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.



## address (Local RPs)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>address <i>address</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim <b>rp local family</b> (inet   inet6)],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>pim <b>rp local family</b> (inet   inet6)],<br>[edit protocols pim <b>rp local family</b> (inet   inet6)],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim <b>rp local family</b> (inet   inet6)] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                 |
| <b>Description</b>              | Configure the local rendezvous point (RP) address.                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <b><i>address</i></b> —Local RP address.                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Local PIM RPs on page 3705</a></li></ul>                                                                                                                                                                                                                                                                                                                                       |



## address (Static RPs)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>address address {   group-ranges {     destination-ip-prefix&lt;/prefix-length&gt;;   }   override;   version version; }</pre>                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols pim <a href="#">rp static</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <a href="#">rp static</a>],</p> <p>[edit protocols pim <a href="#">static</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols pim <a href="#">rp static</a>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                               |
| <b>Description</b>              | <p>Configure static rendezvous point (RP) addresses. You can configure a static RP in a logical system only if the logical system is not directly connected to a source.</p> <p>For each static RP address, you can optionally specify the PIM version and the groups for which this address can be the RP. The default PIM version is version 1.</p>                                                       |
| <b>Options</b>                  | <p><b>address</b>—Static RP address.</p> <p><b>Default:</b> 224.0.0.0/4</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the Static PIM RP Address on the Non-RP Routing Device on page 3707</a></li> </ul>                                                                                                                                                                                                                                                         |



## algorithm

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>algorithm <i>algorithm-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit protocols pim interface <i>interface-name</i> bfd-liveness-detection authentication],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> bfd-liveness-detection authentication]                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | Specify the algorithm to use for BFD authentication.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <p><b><i>algorithm-name</i></b>—Name of algorithm to use for BFD authentication:</p> <ul style="list-style-type: none"><li>• <b>simple-password</b>—Plain-text password. One to 16 bytes of plain text. One or more passwords can be configured.</li><li>• <b>keyed-md5</b>—Keyed Message Digest 5 hash algorithm for sessions with transmit and receive rates greater than 100 ms.</li><li>• <b>meticulous-keyed-md5</b>—Meticulous keyed Message Digest 5 hash algorithm.</li><li>• <b>keyed-sha-1</b>—Keyed Secure Hash Algorithm I for sessions with transmit and receive rates greater than 100 ms.</li><li>• <b>meticulous-keyed-sha-1</b>—Meticulous keyed Secure Hash Algorithm I.</li></ul> |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Understanding Bidirectional Forwarding Detection Authentication for PIM</li><li>• <a href="#">Configuring BFD Authentication for PIM on page 3733</a></li><li>• <a href="#">authentication on page 3801</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                        |



## anycast-pim

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>anycast-pim {   rp-set {     address address &lt;forward-msdp-sa&gt;;   } }</pre>                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols pim <b>rp local family</b> (inet   inet6)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <b>rp local family</b> (inet   inet6)],</p> <p>[edit protocols pim <b>rp local family</b> (inet   inet6)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols pim <b>rp local family</b> (inet   inet6)]</p> |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                      |
| <b>Description</b>              | <p>Configure properties for anycast RP using PIM.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring PIM Anycast With or Without MSDP on page 3708</a></li> </ul>                                                                                                                                                                                                                                                                                                                         |



## assert-timeout

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>assert-timeout <i>seconds</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim],<br>[edit protocols pim],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim]                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Multicast routing devices running PIM sparse mode often forward the same stream of multicast packets onto the same LAN through the rendezvous-point tree (RPT) and shortest-path tree (SPT). PIM assert messages help routing devices determine which routing device forwards the traffic and prunes the RPT for this group. By default, routing devices enter an assert cycle every 180 seconds. You can configure this assert timeout to be between 5 and 210 seconds. |
| <b>Options</b>                  | <b><i>seconds</i></b> —Time for routing device to wait before another assert message cycle.<br><b>Range:</b> 5 through 210 seconds<br><b>Default:</b> 180 seconds                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring the PIM Assert Timeout on page 3725</a></li></ul>                                                                                                                                                                                                                                                                                                                                               |



## authentication (Protocols PIM)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>authentication {   algorithm <i>algorithm-name</i>;   key-chain <i>key-chain-name</i>;   loose-check; }</pre>                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | <pre>[edit protocols pim interface <i>interface-name</i> bfd-liveness-detection], [edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i>   bfd-liveness-detection]</pre>                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | <p>Configure the algorithm, security keychain, and level of authentication for BFD sessions running on PIM interfaces.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p>The statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring BFD Authentication for PIM on page 3733</a></li> <li>• <a href="#">Configuring BFD for PIM on page 3731</a></li> <li>• Understanding Bidirectional Forwarding Detection Authentication for PIM</li> <li>• <a href="#">bfd-liveness-detection on page 3802</a></li> <li>• <a href="#">key-chain (Protocols PIM) on page 3825</a></li> <li>• <a href="#">loose-check on page 3828</a></li> </ul> |



## bfd-liveness-detection (Protocols PIM)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>bfd-liveness-detection {<br/>  authentication {<br/>    algorithm <i>algorithm-name</i>;<br/>    key-chain <i>key-chain-name</i>;<br/>    loose-check;<br/>  }<br/>  detection-time {<br/>    threshold <i>milliseconds</i>;<br/>  }<br/>  minimum-interval <i>milliseconds</i>;<br/>  minimum-receive-interval <i>milliseconds</i>;<br/>  multiplier <i>number</i>;<br/>  no-adaptation;<br/>  transmit-interval {<br/>    minimum-interval <i>milliseconds</i>;<br/>    threshold <i>milliseconds</i>;<br/>  }<br/>  version (0   1   automatic);<br/>}</pre> |
| <b>Hierarchy Level</b>          | <pre>[edit protocols pim interface <i>interface-name</i>],<br/>[edit protocols pim interface <i>interface-name</i> <i>family</i> (inet   inet6)],<br/>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i>],<br/>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> <i>family</i><br/> (inet   inet6)]</pre>                                                                                                                                                           |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 8.1.</p> <p><b>authentication</b> option introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | <p>Configure bidirectional forwarding detection (BFD) timers and authentication for PIM.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring BFD for PIM on page 3731</a></li><li>• <a href="#">Configuring BFD Authentication for PIM on page 3733</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                 |



## bootstrap

|                                 |                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>bootstrap {     family (inet   inet6) {         export [ <i>policy-names</i> ];         import [ <i>policy-names</i> ];         priority <i>number</i>;     } }</pre>                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols pim <i>rp</i>],<br/>         [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <i>rp</i>],<br/>         [edit protocols pim <i>rp</i>],<br/>         [edit routing-instances <i>routing-instance-name</i> protocols pim <i>rp</i>]</p> |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.6.<br/>         Statement introduced in Junos OS Release 9.0 for EX Series switches.<br/>         Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                            |
| <b>Description</b>              | <p>Configure parameters to control bootstrap routers and messages.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.<br/>         routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring PIM Bootstrap Properties for IPv4</li> <li>Configuring PIM Bootstrap Properties for IPv4 or IPv6</li> </ul>                                                                                                                                                                                                   |



## bootstrap-export

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>bootstrap-export [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> protocols pim <i>rp</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code><br><code>pim <i>rp</i>],</code><br><code>[edit protocols pim <i>rp</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols pim <i>rp</i>]</code> |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                  |
| <b>Description</b>              | Apply one or more export policies to control outgoing PIM bootstrap messages.                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more import policies.                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | <code>routing</code> —To view this statement in the configuration.<br><code>routing-control</code> —To add this statement to the configuration.                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring PIM Bootstrap Properties for IPv4</li><li>Configuring PIM Bootstrap Properties for IPv4 or IPv6</li><li><a href="#">bootstrap-import on page 3805</a></li></ul>                                                                                                                                                                               |



## bootstrap-import

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>bootstrap-import [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols pim <a href="#">rp</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <a href="#">rp</a>],</p> <p>[edit protocols pim <a href="#">rp</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols pim <a href="#">rp</a>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                      |
| <b>Description</b>              | Apply one or more import policies to control incoming PIM bootstrap messages.                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more import policies.                                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring PIM Bootstrap Properties for IPv4</li> <li>Configuring PIM Bootstrap Properties for IPv4 or IPv6</li> <li><a href="#">bootstrap-export on page 3804</a></li> </ul>                                                                                                                                                              |



## bootstrap-priority

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>bootstrap-priority <i>number</i>;</code>                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim <a href="#">rp</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <a href="#">rp</a> ],<br>[edit protocols pim <a href="#">rp</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim <a href="#">rp</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                      |
| <b>Description</b>              | Configure whether this routing device is eligible to be a bootstrap router. In the case of a tie, the routing device with the highest IP address is elected to be the bootstrap router.                                                                                                                                                                             |
| <b>Options</b>                  | <b><i>number</i></b> —Priority for becoming the bootstrap router. A value of 0 means that the routing device is not eligible to be the bootstrap router.<br><b>Range:</b> 0 through 255<br><b>Default:</b> 0                                                                                                                                                        |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring PIM Bootstrap Properties for IPv4</li></ul>                                                                                                                                                                                                                                                                       |



## detection-time (BFD for PIM)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> detection-time {     <b>threshold</b> <i>milliseconds</i>; } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit protocols pim interface <i>interface-name</i> bfd-liveness-detection],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> bfd-liveness-detection]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 8.2.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for BFD authentication introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | <p>Enable BFD failure detection. The BFD failure detection timers are adaptive and can be adjusted to be faster or slower. The lower the BFD failure detection timer value, the faster the failure detection and vice versa. For example, the timers can adapt to a higher value if the adjacency fails (that is, the timer detects failures more slowly). Or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. A back-off algorithm increases the receive (Rx) interval by two if the local BFD instance is the reason for the session flap. The transmission (Tx) interval is increased by two if the remote BFD instance is the reason for the session flap. You can use the <b>clear bfd adaptation</b> command to return BFD interval timers to their configured values. The <b>clear bfd adaptation</b> command is hitless, meaning that the command does not affect traffic flow on the routing device.</p> <p>The remaining statement is explained separately.</p> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring BFD for PIM on page 3731</a></li> <li>• <a href="#">bfd-liveness-detection on page 3802</a></li> <li>• <a href="#">threshold on page 3855</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |



## disable (PIM)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | disable;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | <pre>[edit logical-systems <i>logical-system-name</i> protocols pim], [edit logical-systems <i>logical-system-name</i> protocols pim <b>family</b> (inet   inet6)], [edit logical-systems <i>logical-system-name</i> protocols pim interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> protocols pim <b>rp local family</b> (inet   inet6)], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   pim], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   pim interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   pim <b>rp local family</b> (inet   inet6)], [edit protocols pim], [edit protocols pim <b>family</b> (inet   inet6)], [edit protocols pim interface <i>interface-name</i>], [edit protocols pim <b>rp local family</b> (inet   inet6)], [edit routing-instances <i>routing-instance-name</i> protocols pim], [edit routing-instances <i>routing-instance-name</i> protocols pim <b>family</b> (inet   inet6)], [edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols pim <b>rp local family</b> (inet   inet6)]</pre> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p><b>disable</b> statement extended to the <b>[family]</b> hierarchy level in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>              | Explicitly disable PIM at the protocol, interface or family hierarchy levels.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Disabling PIM on page 3692</a></li><li>• <a href="#">disable (PIM Graceful Restart)</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |



## dr-election-on-p2p

|                                 |                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | dr-election-on-p2p;                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim],<br>[edit protocols pim],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.1.<br>Statement introduced in Junos OS Release 9.1 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                          |
| <b>Description</b>              | Enable PIM designated router (DR) election on point-to-point (P2P) links.                                                                                                                                                                                                           |
| <b>Default</b>                  | No PIM DR election is performed on point-to-point links.                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring PIM Designated Router Election on Point-to-Point Links on page 3695</a></li> </ul>                                                                                                                                 |

## dr-register-policy

|                                 |                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | dr-register-policy [ <i>policy-names</i> ];                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim <i>rp</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <i>rp</i> ],<br>[edit protocols pim <i>rp</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim <i>rp</i> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.6.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                      |
| <b>Description</b>              | Apply one or more policies to control outgoing PIM register messages.                                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more import policies.                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Register Message Filters on a PIM RP and DR on page 3723</a></li> <li>• <a href="#">rp-register-policy on page 3849</a></li> </ul>                                                                                                                             |



## embedded-rp

---

|                          |                                                                                                                                                                                                                                                                                                                                       |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>embedded-rp {<br/>  group-ranges {<br/>    destination-ip-prefix &lt;/prefix-length&gt;;<br/>  }<br/>  maximum-rps limit;<br/>}</pre>                                                                                                                                                                                            |
| Hierarchy Level          | <p>[edit logical-systems <i>logical-system-name</i> protocols pim <b>rp</b>],<br/>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <b>rp</b>],<br/>[edit protocols pim <b>rp</b>],<br/>[edit routing-instances <i>routing-instance-name</i> protocols pim <b>rp</b>]</p> |
| Release Information      | <p>Statement introduced before Junos OS Release 7.4.<br/>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br/>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                               |
| Description              | <p>Configure properties for embedded IP version 6 (IPv6) RPs.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                           |
| Required Privilege Level | <p>routing—To view this statement in the configuration.<br/>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                           |
| Related Documentation    | <ul style="list-style-type: none"><li>Configuring PIM Embedded RP for IPv6</li></ul>                                                                                                                                                                                                                                                  |



## export (Protocols PIM Bootstrap)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>export [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim <a href="#">rp bootstrap family</a> (inet   inet6)],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <a href="#">rp bootstrap family</a> (inet   inet6)],<br>[edit protocols pim <a href="#">rp bootstrap family</a> (inet   inet6)],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim <a href="#">rp bootstrap family</a> (inet   inet6)] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.6.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Apply one or more export policies to control outgoing PIM bootstrap messages.                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more import policies.                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring PIM Bootstrap Properties for IPv4</li> <li>Configuring PIM Bootstrap Properties for IPv4 or IPv6</li> <li><a href="#">import (Protocols PIM Bootstrap) on page 3819</a></li> </ul>                                                                                                                                                                                                                                                           |

## export (Protocols PIM)

|                                 |                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>export [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim],<br>[edit protocols pim],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                  |
| <b>Description</b>              | Apply one or more export policies to control outgoing PIM join and prune messages. PIM join and prune filters can be applied to PIM-SM and PIM-SSM messages. PIM join and prune filters cannot be applied to PIM-DM messages.                                                       |
| <b>Required Privilege Level</b> | view-level—To view this statement in the configuration.<br>control-level—To add this statement to the configuration.                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">Filtering Outgoing PIM Join Messages on page 3721</a></li> </ul>                                                                                                                                                                 |



## family (Bootstrap)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>family (inet   inet6) {<br/>    export [ <i>policy-names</i> ];<br/>    import [ <i>policy-names</i> ];<br/>    priority <i>number</i>;<br/>}</pre>                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim <b>rp bootstrap</b> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>pim <b>rp bootstrap</b> ],<br>[edit protocols pim <b>rp bootstrap</b> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim <b>rp bootstrap</b> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.6.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                 |
| <b>Description</b>              | Configure which IP protocol type bootstrap properties to apply.                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <b>inet</b> —Apply IP version 4 (IPv4) local RP properties.<br><br><b>inet6</b> —Apply IPv6 local RP properties.<br><br>The remaining statements are explained separately.                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring PIM Bootstrap Properties for IPv4</li><li>Configuring PIM Bootstrap Properties for IPv4 or IPv6</li></ul>                                                                                                                                                                                                                |



## family (Protocols PIM)

---

|                              |                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                | family (inet   inet6) {<br>disable;<br>}                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>       | [edit logical-systems <i>logical-system-name</i> protocols pim],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim],<br>[edit protocols pim],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> ] |
| <b>Release Information</b>   | Statement introduced in Junos OS Release 9.6.<br>Statement introduced in Junos OS 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                   |
| <b>Description</b>           | Enable the PIM protocol for the specified family.                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>               | <b>inet</b> —Enable the PIM protocol for the IP version 4 (IPv4) address family.<br><br><b>inet6</b> —Enable the PIM protocol for the IP version 6 (IPv6) address family.<br><br>The remaining statement is explained separately.                                                                                                                                                            |
| <b>Related Documentation</b> | <ul style="list-style-type: none"> <li>• <a href="#">Disabling PIM on page 3692</a></li> <li>• disable (PIM Graceful Restart)</li> <li>• <a href="#">disable (PIM) on page 3808</a></li> </ul>                                                                                                                                                                                               |



## family (Local RP)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>family (inet   inet6) {     disable;     address address;     anycast-pim {         local-address address;         rp-set {             address address &lt;forward-msdp-sa&gt;;         }     }     group-ranges {         destination-ip-prefix &lt;/prefix-length&gt;;     }     hold-time seconds;     override;     priority number; }</pre>  |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim <b>rp local</b> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <b>rp local</b> ],<br>[edit protocols pim <b>rp local</b> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim <b>rp local</b> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                          |
| <b>Description</b>              | Configure which IP protocol type local RP properties to apply.                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <b>inet</b> —Apply IP version 4 (IPv4) local RP properties.<br><br><b>inet6</b> —Apply IPv6 local RP properties.<br><br>The remaining statements are explained separately.                                                                                                                                                                              |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Local PIM RPs on page 3705</a></li></ul>                                                                                                                                                                                                                                                |



## group (RPF Selection)

---

|                                 |                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> group group-address{   source source-address{     next-hop next-hop-address;   }   wildcard-source {     next-hop next-hop-address;   } } </pre> |
| <b>Hierarchy Level</b>          | [edit routing-instances <i>routing-instance-name</i> edit protocols pim rpf-selection]                                                                 |
| <b>Release Information</b>      | <p>Statement introduced in JUNOS Release 10.4.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                            |
| <b>Description</b>              | Configure the PIM group address for which you configure RPF selection <a href="#">group (RPF Selection)</a> .                                          |
| <b>Default</b>                  | By default, PIM RPF selection is not configured.                                                                                                       |
| <b>Options</b>                  | <b>group-address</b> —PIM group address for which you configure RPF selection.                                                                         |
| <b>Required Privilege Level</b> | <p>view-level—To view this statement in the configuration.</p> <p>control-level—To add this statement to the configuration.</p>                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Example: Configuring PIM RPF Selection</li> </ul>                                                               |



## group-ranges

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>group-ranges {     destination-ip-prefix&lt;/prefix-length&gt;; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols pim rp bidirectional address <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols pim <a href="#">rp embedded-rp</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>instance-name</i> protocols pim rp bidirectional address <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <a href="#">rp embedded-rp</a>],</p> <p>[edit protocols pim rp bidirectional address <i>address</i>],</p> <p>[edit protocols pim <a href="#">rp embedded-rp</a>],</p> <p>[edit protocols pim <a href="#">rp local family</a> (inet   inet6)],</p> <p>[edit protocols pim <a href="#">rp static address</a> <i>address</i>],</p> <p>[edit routing-instances <i>instance-name</i> protocols pim rp bidirectional address <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols pim <a href="#">rp embedded-rp</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols pim <a href="#">rp local family</a> (inet   inet6)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols pim <a href="#">rp static address</a> <i>address</i>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Support for bidirectional RP addresses introduced in Junos OS Release 12.1.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Configure the address ranges of the multicast groups for which this routing device can be a rendezvous point (RP).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Default</b>                  | The routing device is eligible to be the RP for all IPv4 or IPv6 groups (224.0.0.0/4 or FF70::/12 to FFF0::/12).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <i>destination-ip-prefix&lt;/prefix-length&gt;</i> —Addresses or address ranges for which this routing device can be an RP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Local PIM RPs on page 3705</a> in the Multicast Protocols Configuration Guide</li> <li>• <a href="#">Configuring PIM Embedded RP for IPv6</a> in the Multicast Protocols Configuration Guide</li> <li>• <a href="#">Example: Configuring Bidirectional PIM</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |



## hello-interval (Protocols PIM)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>hello-interval <i>seconds</i>;</code>                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim interface <i>interface-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> ],<br>[edit protocols pim interface <i>interface-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                          |
| <b>Description</b>              | Specify how often the routing device sends PIM hello packets out of an interface.                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <b><i>seconds</i></b> —Length of time between PIM hello packets.<br><b>Range:</b> 0 through 255<br><b>Default:</b> 30 seconds                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">hold-time on page 3818</a></li> <li>• <a href="#">Modifying the PIM Hello Interval on page 3688</a></li> </ul>                                                                                                                                                                                                                                                     |



## hold-time (Protocols PIM)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | hold-time <i>seconds</i> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim rp bidirectional address <i>address</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>instance-name</i> protocols pim<br>rp bidirectional address <i>address</i> ],<br>[edit protocols pim rp bidirectional address <i>address</i> ],<br>[edit protocols pim <b>rp local family</b> (inet   inet6)],<br>[edit routing-instances <i>instance-name</i> protocols pim rp bidirectional address <i>address</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim <b>rp local family</b> (inet   inet6)] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.<br>Support for bidirectional RP addresses introduced in Junos OS Release 12.1.                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Specify the time period for which a neighbor is to consider the sending routing device (this routing device) to be operative (up).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <b><i>seconds</i></b> —Hold time.<br><b>Range:</b> 0 through 255<br><b>Default:</b> 150 seconds                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Local PIM RPs on page 3705</a> in the Multicast Protocols Configuration Guide</li><li>• Example: Configuring Bidirectional PIM</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                |



## import (Protocols PIM Bootstrap)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>import [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols pim <b>rp bootstrap</b> (inet   inet6)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <b>rp bootstrap</b> (inet   inet6)],</p> <p>[edit protocols pim <b>rp bootstrap</b> (inet   inet6)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols pim <b>rp bootstrap</b> (inet   inet6)]</p> |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.6.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                          |
| <b>Description</b>              | Apply one or more import policies to control incoming PIM bootstrap messages.                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more import policies.                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring PIM Bootstrap Properties for IPv4</li> <li>Configuring PIM Bootstrap Properties for IPv4 or IPv6</li> <li><a href="#">export (Protocols PIM Bootstrap) on page 3811</a></li> </ul>                                                                                                                                                                                                              |



## import (Protocols PIM)

---

|                                 |                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>import [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim],<br>[edit protocols pim],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                      |
| <b>Description</b>              | Apply one or more policies to routes being imported into the routing table from PIM. Use the <b>import</b> statement to filter PIM join messages and prevent them from entering the network.                                                                                        |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more policies.                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Filtering Incoming PIM Join Messages on page 3722</a></li></ul>                                                                                                                                                                 |



## infinity

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>infinity [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols pim <a href="#">spt-threshold</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <a href="#">spt-threshold</a>],</p> <p>[edit protocols pim <a href="#">spt-threshold</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols pim <a href="#">spt-threshold</a>]</p> |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 8.0.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                      |
| <b>Description</b>              | Apply one or more policies to set the SPT threshold to infinity for a source-group address pair. Use the <b>infinity</b> statement to prevent the last-hop routing device from transitioning from the RPT rooted at the RP to an SPT rooted at the source for that source-group address pair.                                                                                                                                  |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more policies.                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring the PIM SPT Threshold Policy on page 3728</a></li> </ul>                                                                                                                                                                                                                                                                                             |



## interface

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>interface (all   <i>interface-name</i>) {<br/>  disable;<br/>  family (inet   inet6) {<br/>    disable;<br/>  }<br/>  hello-interval <i>seconds</i>;<br/>  mode (dense   sparse   sparse-dense);<br/>  neighbor-policy [ <i>policy-names</i> ];<br/>  override-interval <i>milliseconds</i>;<br/>  priority <i>number</i>;<br/>  propagation-delay <i>milliseconds</i>;<br/>  reset-tracking-bit;<br/>  version <i>version</i>;<br/>}</pre> |
| Hierarchy Level          | [edit protocols pim],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim]                                                                                                                                                                                                                                                                                                                                                     |
| Release Information      | Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                |
| Description              | Enable PIM on an interface and configure interface-specific properties.                                                                                                                                                                                                                                                                                                                                                                          |
| Options                  | <p><b>interface-name</b>—Name of the interface. Specify the full interface name, including the physical and logical address components. To configure all interfaces, you can specify <b>all</b>.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                   |
| Required Privilege Level | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                              |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">PIM on Aggregated Interfaces on page 3654</a></li></ul>                                                                                                                                                                                                                                                                                                                                      |



## join-load-balance

---

|                                 |                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | join-load-balance {<br>automatic;<br>}                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim],<br>[edit protocols pim],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.0.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                          |
| <b>Description</b>              | Enable load balancing of PIM join messages across interfaces and routing devices.                                                                                                                                                                                                   |
| <b>Options</b>                  | <b>automatic</b> —Enables automatic load balancing of PIM join messages. When a new interface or neighbor is introduced into the network, ECMP joins are redistributed with minimal disruption to traffic.                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• Example: Configuring PIM Make-Before-Break Join Load Balancing</li> <li>• <a href="#">Configuring PIM Join Load Balancing on page 3697</a></li> <li>• clear pim join-distribution in the Junos OS Operational Mode Commands</li> </ul>     |



## join-prune-timeout

---

|                                 |                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | join-prune-timeout <i>seconds</i> ;                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim],<br>[edit protocols pim],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.4.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                  |
| <b>Description</b>              | Configure the timeout for the join state. If the periodic join refresh message is not received before the timeout expires, the join state is removed.                                                                                                                               |
| <b>Options</b>                  | <b>seconds</b> —Number of seconds to wait for the periodic join message to arrive.<br><b>Range:</b> 210 through 240 seconds<br><b>Default:</b> 210 seconds                                                                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Modifying the Join State Timeout on page 3700</a></li></ul>                                                                                                                                                                     |



## key-chain (Protocols PIM)

---

|                                 |                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>key-chain <i>key-chain-name</i>;</code>                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | <p>[edit protocols pim interface <i>interface-name</i> family {inet   inet6} bfd-liveness-detection authentication],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> family {inet   inet6} bfd-liveness-detection authentication]</p>     |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement modified in Junos OS Release 12.2 to include <b>family</b> in the hierarchy level.</p>                                                                   |
| <b>Description</b>              | Specify the security keychain to use for BFD authentication.                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <p><b><i>key-chain-name</i></b>—Name of the security keychain to use for BFD authentication. The name is a unique integer between <b>0</b> and <b>63</b>. This must match one of the keychains in the <b>authentication-key-chains</b> statement at the <b>[edit security]</b> hierarchy level.</p> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring BFD Authentication for PIM on page 3733</a></li> <li>• Understanding Bidirectional Forwarding Detection Authentication for PIM</li> <li>• <a href="#">authentication on page 3801</a></li> </ul>                                   |



## local

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>local {<br/>  disable;<br/>  address address;<br/>  family (inet   inet6) {<br/>    disable;<br/>    address address;<br/>    anycast-pim {<br/>      local-address address;<br/>      rp-set {<br/>        address address &lt;forward-msdp-sa&gt;;<br/>      }<br/>    }<br/>    group-ranges {<br/>      destination-ip-prefix&lt;/prefix-length&gt;;<br/>    }<br/>    hold-time seconds;<br/>    override;<br/>    priority number;<br/>  }<br/>  group-ranges {<br/>    destination-ip-prefix&lt;/prefix-length&gt;;<br/>  }<br/>  hold-time seconds;<br/>  override;<br/>  priority number;<br/>}</pre> |
| Hierarchy Level          | <p>[edit logical-systems <i>logical-system-name</i> protocols pim <b>rp</b>],<br/>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <b>rp</b>],<br/>[edit protocols pim <b>rp</b>],<br/>[edit routing-instances <i>routing-instance-name</i> protocols pim <b>rp</b>]</p>                                                                                                                                                                                                                                                                               |
| Release Information      | <p>Statement introduced before Junos OS Release 7.4.<br/>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br/>Statement introduced in Junos OS Release 11.3 for the QFX Series.<br/>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                      |
| Description              | Configure the routing device's RP properties.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Required Privilege Level | <p>routing—To view this statement in the configuration.<br/>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Local PIM RPs on page 3705</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |



## local-address (Protocols PIM)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>local-address <i>address</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols pim <b>rp local family</b> (inet   inet6) <b>anycast-pim</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <b>rp local family</b> (inet   inet6) <b>anycast-pim</b>],</p> <p>[edit protocols pim <b>rp local family</b> (inet   inet6) <b>anycast-pim</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols pim <b>rp local family</b> (inet   inet6) <b>anycast-pim</b>]</p> |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | Configure the routing device local address for the anycast rendezvous point (RP). If this statement is omitted, the router ID is used as this address.                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>                  | <b>address</b> —Anycast RP IPv4 or IPv6 address, depending on <b>family</b> configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring PIM Anycast With or Without MSDP on page 3708</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                     |



## loose-check

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | loose-check;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit protocols pim interface <i>interface-name</i> bfd-liveness-detection authentication],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> bfd-liveness-detection authentication]                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | <p>Specify loose authentication checking on the BFD session. Use loose authentication for transitional periods only when authentication might not be configured at both ends of the BFD session.</p> <p>By default, strict authentication is enabled and authentication is checked at both ends of each BFD session. Optionally, to smooth migration from nonauthenticated sessions to authenticated sessions, you can configure <i>loose checking</i>. When loose checking is configured, packets are accepted without authentication being checked at each end of the session.</p> |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring BFD Authentication for PIM on page 3733</a></li><li>• Understanding Bidirectional Forwarding Detection Authentication for PIM</li><li>• <a href="#">authentication on page 3801</a></li></ul>                                                                                                                                                                                                                                                                                                                        |



## maximum-rps

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>maximum-rps <i>limit</i>;</code>                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim <a href="#">rp embedded-rp</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <a href="#">rp embedded-rp</a> ],<br>[edit protocols pim <a href="#">rp embedded-rp</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim <a href="#">rp embedded-rp</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                      |
| <b>Description</b>              | Limit the number of RPs that the routing device acknowledges.                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <i>limit</i> —Number of RPs.<br><b>Range:</b> 1 through 500<br><b>Default:</b> 100                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring PIM Embedded RP for IPv6</li> </ul>                                                                                                                                                                                                                                                                                                                              |




## minimum-interval (PIM BFD Liveness Detection)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>minimum-interval <i>milliseconds</i>;</code>                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit protocols pim interface <i>interface-name</i> <b>bfd-liveness-detection</b> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> <b>bfd-liveness-detection</b> ]                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.1.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                 |
| <b>Description</b>              | Configure the minimum interval after which the local routing device transmits hello packets and then expects to receive a reply from a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can specify the minimum transmit and receive intervals separately using the <b>transmit-interval</b> <b>minimum-interval</b> and <b>minimum-receive-interval</b> statements. |
| <b>Options</b>                  | <b><i>milliseconds</i></b> —Minimum transmit and receive interval.<br><b>Range:</b> 1 through 255,000 milliseconds                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring BFD for PIM on page 3731</a></li></ul>                                                                                                                                                                                                                                                                                                                     |



## minimum-interval (PIM BFD Transmit Interval)

|                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                      | <code>minimum-interval <i>milliseconds</i>;</code>                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                             | [edit protocols pim interface <i>interface-name</i> bfd-liveness-detection transmit-interval],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> bfd-liveness-detection transmit-interval]                                                                                                                                                      |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                         | Statement introduced in Junos OS Release 8.2.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Support for BFD authentication introduced in Junos OS Release 9.6.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                    |
| <b>Description</b>                                                                                                                                                                                                                                                                                                 | Configure the minimum interval after which the local routing device transmits hello packets to a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum transmit interval using the <b>minimum-interval</b> statement at the [edit protocols pim interface <i>interface-name</i> bfd-liveness-detection] hierarchy level. |
| <b>Options</b>                                                                                                                                                                                                                                                                                                     | <i>milliseconds</i> —Minimum transmit interval value.<br><b>Range:</b> 1 through 255,000                                                                                                                                                                                                                                                                                                            |
| <div>  <p><b>NOTE:</b> The threshold value specified in the <b>threshold</b> statement must be greater than the value specified in the <b>minimum-interval</b> statement for the <b>transmit-interval</b> statement.</p> </div> |                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                    | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                       | <ul style="list-style-type: none"> <li>• <a href="#">Configuring BFD for PIM on page 3731</a></li> <li>• <a href="#">bfd-liveness-detection on page 3802</a></li> <li>• <a href="#">minimum-interval on page 3830</a></li> <li>• <a href="#">threshold on page 3856</a></li> </ul>                                                                                                                  |



## minimum-receive-interval

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | minimum-receive-interval <i>milliseconds</i> ;                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit protocols pim interface <i>interface-name</i> <b>bfd-liveness-detection</b> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> <b>bfd-liveness-detection</b> ]                                                                                                                                                                                |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.1.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                |
| <b>Description</b>              | Configure the minimum interval after which the local routing device must receive a reply from a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum receive interval using the <b>minimum-interval</b> statement at the [edit protocols pim interface <i>interface-name</i> <b>bfd-liveness-detection</b> ] hierarchy level. |
| <b>Options</b>                  | <i>milliseconds</i> —Minimum receive interval.<br><b>Range:</b> 1 through 255,000 milliseconds                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring BFD for PIM on page 3731</a></li></ul>                                                                                                                                                                                                                                                                                                    |



## mode (Protocols PIM)

|                            |                                                                                                                                                                |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>mode (dense   sparse   sparse-dense);</code>                                                                                                             |
| <b>Hierarchy Level</b>     | [edit protocols pim interface <i>interface-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> ] |
| <b>Release Information</b> | Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                              |
| <b>Description</b>         | Configure PIM to operate in sparse, dense, or sparse-dense mode.                                                                                               |



**NOTE:** The QFX Series does not support dense or sparse-dense mode.

|                                 |                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Options</b>                  | <b>dense</b> —Operate in dense mode.<br><b>sparse</b> —Operate in sparse mode.<br><b>sparse-dense</b> —Operate in sparse-dense mode.<br><b>Default:</b> sparse |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                            |

## multiplier

|                                 |                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>multiplier <i>number</i>;</code>                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit protocols pim interface <i>interface-name</i> <b>bfd-liveness-detection</b> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> <b>bfd-liveness-detection</b> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.1.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                 |
| <b>Description</b>              | Configure the number of hello packets not received by a neighbor that causes the originating interface to be declared down.                                                                                                |
| <b>Options</b>                  | <b><i>number</i></b> —Number of hello packets.<br><b>Range:</b> 1 through 255<br><b>Default:</b> 3                                                                                                                         |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring BFD for PIM on page 3731</a></li> </ul>                                                                                                                   |



## neighbor-policy

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>neighbor-policy [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim interface <i>interface-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>pim interface <i>interface-name</i> ],<br>[edit protocols pim interface <i>interface-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.2.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                 |
| <b>Description</b>              | Apply a PIM interface-level policy to filter neighbor IP addresses.                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <i>policy-name</i> —Name of the policy that filters neighbor IP addresses.                                                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Interface-Level PIM Neighbor Policies on page 3720</a></li></ul>                                                                                                                                                                                                                                                                                           |

## next-hop (PIM RPF Selection)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>next-hop <i>next-hop-address</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit routing-instances <i>routing-instance-name</i> protocols pim rpf-selection group <i>group-address</i><br>source <i>source-address</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim rpf-selection group <i>group-address</i><br>wildcard-source],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim rpf-selection prefix-list<br><i>prefix-list-addresses</i> source <i>source-address</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim rpf-selection prefix-list<br><i>prefix-list-addresses</i> wildcard-source] |
| <b>Release Information</b>      | Statement introduced in JUNOS Release 10.4.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | Configure the specific next-hop address for the PIM group source.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <i>next-hop-address</i> —Specific next-hop address for the PIM group source.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | view-level—To view this statement in the configuration.<br>control-level—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Example: Configuring PIM RPF Selection</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |



---

## no-adaptation (PIM BFD Liveness Detection)

---

|                                 |                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-adaptation;                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit protocols pim interface <i>interface-name</i> bfd-liveness-detection],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> bfd-liveness-detection]                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.0<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Support for BFD authentication introduced in Junos OS Release 9.6.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series. |
| <b>Description</b>              | Configure BFD sessions not to adapt to changing network conditions. We recommend that you <i>do not</i> disable BFD adaptation unless it is preferable to have BFD adaptation disabled in your network.                                                         |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring BFD for PIM on page 3731</a></li><li>• <a href="#">bfd-liveness-detection on page 3802</a></li></ul>                                                                                            |



## override-interval

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | override-interval <i>milliseconds</i> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim],<br>[edit logical-systems <i>logical-system-name</i> protocols pim interface <i>interface-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>pim interface <i>interface-name</i> ],<br>[edit protocols pim],<br>[edit protocols pim interface <i>interface-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim]<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.1.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | Set the maximum time in milliseconds to delay sending override join messages for a multicast network that has join suppression enabled. When a router or switch sees a prune message for a join it is currently suppressing, it waits for the interval specified by the override timer before it sends an override join message.                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | This is a random timer with a value in milliseconds.<br><b>Range:</b> 0 through maximum override value<br><b>Default:</b> 2000 milliseconds                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Enabling Join Suppression on page 3701</a></li><li>• <a href="#">propagation-delay on page 3844</a></li><li>• <a href="#">reset-tracking-bit on page 3845</a></li></ul>                                                                                                                                                                                                                                                                                                                                                           |



## pim

```

Syntax  pim {
    disable;
    assert-timeout seconds;
    dense-groups {
        addresses;
    }
    dr-election-on-p2p;
    export;
    family (inet | inet6) {
        disable;
    }
    graceful-restart {
        disable;
        restart-duration seconds;
    }
    import [ policy-names ];
    interface interface-name {
        accept-remote-source;
        disable;
        family (inet | inet6) {
            disable;
        }
        hello-interval seconds;
        mode (dense | sparse | sparse-dense);
        neighbor-policy [ policy-names ];
        override-interval milliseconds;
        priority number;
        propagation-delay milliseconds;
        reset-tracking-bit;
        version version;
    }
    join-load-balance;
    join-prune-timeout;
    nonstop-routing;
    override-interval milliseconds;
    propagation-delay milliseconds;
    reset-tracking-bit;
    rib-group group-name;
    rp {
        auto-rp {
            (announce | discovery | mapping);
            (mapping-agent-election | no-mapping-agent-election);
        }
        bootstrap {
            family (inet | inet6) {
                export [ policy-names ];
                import [ policy-names ];
                priority number;
            }
        }
        bootstrap-import [ policy-names ];
        bootstrap-export [ policy-names ];
    }
}

```



```
bootstrap-priority number;
dr-register-policy [ policy-names ];
embedded-rp {
  group-ranges {
    destination-ip-prefix </prefix-length>;
  }
  maximum-rps limit;
}
local {
  family (inet | inet6) {
    address address;
    anycast-pim {
      disable;
      rp-set {
        address address <forward-msdp-sa>;
      }
      local-address address;
    }
    group-ranges {
      destination-ip-prefix </prefix-length>;
    }
    hold-time seconds;
    priority number;
  }
}
rp-register-policy [ policy-names ];
spt-threshold {
  infinity [ policy-names ];
}
static {
  address address {
    group-ranges {
      version version;
      destination-ip-prefix </prefix-length>;
    }
  }
}
rpf-selection {
  group group-address {
    source source-address {
      next-hop next-hop-address;
    }
    wildcard-source {
      next-hop next-hop-address;
    }
  }
  prefix-list prefix-list-addresses {
    source source-address {
      next-hop next-hop-address;
    }
    wildcard-source {
      next-hop next-hop-address;
    }
  }
}
traceoptions {
```



```

    file filename <files number> <size size> <world-readable | no-world-readable>;
    flag flag <flag-modifier> <disable>;
  }
  tunnel-devices [ mt-fpc/pic/port ];
}

```

|                                 |                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols],<br>[edit protocols],<br>[edit routing-instances <i>routing-instance-name</i> protocols] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br><b>family</b> statement introduced in Junos OS Release 9.6.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.       |
| <b>Description</b>              | Enable PIM on the routing device.<br><br>The statements are explained separately.                                                                                                                                                                                   |
| <b>Default</b>                  | PIM is disabled on the routing device.                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                 |



## prefix-list (PIM RPF Selection)

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>prefix-list <i>prefix-list-addresses</i> {<br/>    source <i>source-address</i> {<br/>        next-hop <i>next-hop-address</i>;<br/>    }<br/>    wildcard-source {<br/>        next-hop <i>next-hop-address</i>;<br/>    }<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                        |
| Hierarchy Level          | <pre>[edit routing-instances <i>routing-instance-name</i> protocols pim rpf-selection group <i>group-address</i><br/>    source <i>source-address</i>],<br/>[edit routing-instances <i>routing-instance-name</i> protocols pim rpf-selection group <i>group-address</i><br/>    wildcard-source],<br/>[edit routing-instances <i>routing-instance-name</i> protocols pim rpf-selection prefix-list<br/>    <i>prefix-list-addresses</i> source <i>source-address</i>],<br/>[edit routing-instances <i>routing-instance-name</i> protocols pim rpf-selection prefix-list<br/>    <i>prefix-list-addresses</i> wildcard-source]</pre> |
| Release Information      | Statement introduced in Junos OS Release 10.4.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Description              | (Optional) Configure a list of prefixes (addresses) for multiple PIM groups.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Options                  | <b><i>prefix-list-addresses</i></b> —List of prefixes (addresses) for multiple PIM groups.<br><br>The remaining statements are explained separately.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Required Privilege Level | view-level—To view this statement in the configuration.<br>control-level—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Related Documentation    | <ul style="list-style-type: none"><li>Example: Configuring PIM RPF Selection</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |



## priority (Bootstrap)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>priority <i>number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols pim <b>rp bootstrap</b> (inet   inet6)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <b>rp bootstrap</b> (inet   inet6)],</p> <p>[edit protocols pim <b>rp bootstrap</b> (inet   inet6)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols pim <b>rp bootstrap</b> (inet   inet6)]</p> |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.6.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                          |
| <b>Description</b>              | Configure the routing device's likelihood to be elected as the bootstrap router.                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <p><b>number</b>—Routing device's priority for becoming the bootstrap router. A higher value corresponds to a higher priority.</p> <p><b>Range:</b> 0 through a 32-bit number</p> <p><b>Default:</b> 0 (The routing device has the least likelihood of becoming the bootstrap router and sends packets with a priority of 0.)</p>                                                                                                                  |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring PIM Bootstrap Properties for IPv4</li> <li>Configuring PIM Bootstrap Properties for IPv4 or IPv6</li> <li><a href="#">bootstrap-priority on page 3806</a></li> </ul>                                                                                                                                                                                                                            |



## priority (PIM Interfaces)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>priority <i>number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim interface <i>interface-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>pim interface <i>interface-name</i> ],<br>[edit protocols pim interface <i>interface-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                             |
| <b>Description</b>              | Configure the routing device's likelihood to be elected as the designated router.                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <b><i>number</i></b> —Routing device's priority for becoming the designated router. A higher value corresponds to a higher priority.<br><b>Range:</b> 0 through a 32-bit number<br><b>Default:</b> 0 (The routing device has the least likelihood of becoming the designated router.)                                                                                                                                      |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Interface Priority for PIM Designated Router Selection on page 3694</a></li></ul>                                                                                                                                                                                                                                                                          |



## priority (PIM RPs)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>priority <i>number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols pim rp bidirectional address <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>instance-name</i> protocols pim rp bidirectional address <i>address</i>],</p> <p>[edit protocols pim rp bidirectional address <i>address</i>],</p> <p>[edit protocols pim <b>rp local family</b> (inet   inet6)],</p> <p>[edit routing-instances <i>instance-name</i> protocols pim rp bidirectional address <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols pim <b>rp local family</b> (inet   inet6)]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Support for bidirectional RP addresses introduced in Junos OS Release 12.1.</p>                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | <p>For PIM-SM, configure this routing device's priority for becoming an RP.</p> <p>For bidirectional PIM, configure this RP address' priority for becoming an RP.</p> <p>The bootstrap router uses this field when selecting the list of candidate rendezvous points to send in the bootstrap message. A smaller number increases the likelihood that the routing device or RP address becomes the RP. A priority value of 0 means that bootstrap router can override the group range being advertised by the candidate RP.</p>                                                                                                             |
| <b>Options</b>                  | <p><b><i>number</i></b>—Priority for becoming an RP. A lower value corresponds to a higher priority.</p> <p><b>Range:</b> 0 through 255</p> <p><b>Default:</b> 1</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Local PIM RPs on page 3705</a> in the Multicast Protocols Configuration Guide</li> <li>• Example: Configuring Bidirectional PIM</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                 |



## propagation-delay

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>propagation-delay <i>milliseconds</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit protocols pim],<br>[edit protocols pim interface <i>interface-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> protocols pim],<br>[edit logical-systems <i>logical-system-name</i> protocols pim interface <i>interface-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.1.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Set a delay for implementing a PIM prune message on the upstream router on a multicast network for which join suppression has been enabled. The router waits for the prune pending period to detect whether a join message is currently being suppressed by another router.                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                  | <b><i>milliseconds</i></b> —Interval for the prune pending timer, which is the sum of the <b>propagation-delay</b> value and the <b>override-interval</b> value.<br><b>Range:</b> 250 through 2000 milliseconds<br><b>Default:</b> 500 milliseconds                                                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Enabling Join Suppression on page 3701</a></li><li>• <a href="#">override-interval on page 3836</a></li><li>• <a href="#">reset-tracking-bit on page 3845</a></li></ul>                                                                                                                                                                                                                                                                                                                                                         |



## reset-tracking-bit

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | reset-tracking-bit;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit protocols pim],<br>[edit protocols pim interface <i>interface-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> protocols pim],<br>[edit logical-systems <i>logical-system-name</i> protocols pim interface <i>interface-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> ]                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.1.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Change the value of a tracking bit (T-bit) field in the LAN prune delay hello option from the default of 1 to 0, which enables join suppression for a multicast interface. When the network starts receiving multiple identical join messages, join suppression triggers a random timer with a value of 66 through 84 milliseconds ( $1.1 \times \text{periodic}$ through $1.4 \times \text{periodic}$ , where periodic is 60 seconds). This creates an interval during which no identical join messages are sent. Eventually, only one of the identical messages is sent. Join suppression is triggered each time identical messages are sent for the same join. |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Enabling Join Suppression on page 3701</a></li> <li>• <a href="#">override-interval on page 3836</a></li> <li>• <a href="#">propagation-delay on page 3844</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                           |



## rib-group (Protocols PIM)

---

|                                 |                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>rib-group {<br/>    inet <i>group-name</i>;<br/>    inet6 <i>group-name</i>;<br/>}</pre>                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim],<br>[edit protocols pim],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                      |
| <b>Description</b>              | Associate a routing table group with PIM.                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <b><i>table-name</i></b> —Name of the routing table. The name must be one that you defined with the <b>rib-groups</b> statement at the [edit routing-options] hierarchy level.                                                                                                      |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Example: Configuring a Dedicated PIM RPF Routing Table</li></ul>                                                                                                                                                                              |



## rp

```

Syntax  rp {
    auto-rp {
        (announce | discovery | mapping);
        (mapping-agent-election | no-mapping-agent-election);
    }
    bidirectional {
        address address {
            group-ranges {
                destination-ip-prefix </prefix-length>;
            }
            hold-time seconds;
            priority number;
        }
    }
    bootstrap {
        family (inet | inet6) {
            export [ policy-names ];
            import [ policy-names ];
            priority number;
        }
    }
    bootstrap-export [ policy-names ];
    bootstrap-import [ policy-names ];
    bootstrap-priority number;
    dr-register-policy [ policy-names ];
    embedded-rp {
        group-ranges {
            destination-ip-prefix </prefix-length>;
        }
        maximum-rps limit;
    }
    group-rp-mapping {
        family (inet | inet6) {
            log-interval seconds;
            maximum limit;
            threshold value;
        }
    }
    log-interval seconds;
    maximum limit;
    threshold value;
}
local {
    family (inet | inet6) {
        disable;
        address address;
        anycast-pim {
            local-address address;
            address address <forward-msdp-sa>;
            rp-set {
            }
        }
    }
}

```



```

    }
    group-ranges {
        destination-ip-prefix</prefix-length>;
    }
    hold-time seconds;
    override;
    priority number;
}
}
register-limit {
    family (inet | inet6) {
        log-interval seconds;
        maximum limit;
        threshold value;
    }
}
log-interval seconds;
maximum limit;
threshold value;
}
}
register-probe-time register-probe-time;
}
rp-register-policy [ policy-names ];
static {
    address address {
        override;
        version version;
        group-ranges {
            destination-ip-prefix</prefix-length>;
        }
    }
}
}
}

```

|                                 |                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim],<br>[edit protocols pim],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                      |
| <b>Description</b>              | <p>Configure the routing device as an actual or potential RP. A routing device can be an RP for more than one group.</p> <p>The remaining statements are explained separately.</p>                                                                                                  |
| <b>Default</b>                  | If you do not include the <b>rp</b> statement, the routing device can never become the RP.                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                 |



- Related Documentation**
- [Understanding PIM Sparse Mode on page 3655](#)

## rp-register-policy

---

|                                 |                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>rp-register-policy [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim <b>rp</b> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <b>rp</b> ],<br>[edit protocols pim <b>rp</b> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim <b>rp</b> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.6.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                      |
| <b>Description</b>              | Apply one or more policies to control incoming PIM register messages.                                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more import policies.                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Register Message Filters on a PIM RP and DR on page 3723</a></li> <li>• <a href="#">dr-register-policy on page 3809</a></li> </ul>                                                                                                                             |



## rp-set

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>rp-set {<br/>    address address &lt;forward-msdp-sa&gt;;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols pim <b>local family</b> (inet   inet6) <b>anycast-pim</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <b>local family</b> (inet   inet6) <b>anycast-pim</b>],</p> <p>[edit protocols pim <b>local family</b> (inet   inet6) <b>anycast-pim</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols pim <b>local family</b> (inet   inet6) <b>anycast-pim</b>]</p> |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | <p>Configure a set of rendezvous point (RP) addresses for anycast RP. You can configure up to 15 RPs.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring PIM Anycast With or Without MSDP on page 3708</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                           |



## rpf-selection

|                                 |                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> rpf-selection {   group group-address {     source source-address {       next-hop next-hop-address;     }     wildcard-source {       next-hop next-hop-address;     }   }   prefix-list prefix-list-addresses {     source source-address {       next-hop next-hop-address;     }     wildcard-source {       next-hop next-hop-address;     }   } } </pre> |
| <b>Hierarchy Level</b>          | [edit routing-instances <i>routing-instance-name</i> protocols pim]                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | <p>Statement introduced in JUNOS Release 10.4.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Configure the PIM RPF next-hop neighbor for a specific group and source for a VRF routing instance.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                 |
| <b>Default</b>                  | If you omit the <b>rpf-selection</b> statement, PIM RPF checks typically choose the best path determined by the unicast protocol for all multicast flows.                                                                                                                                                                                                            |
| <b>Options</b>                  | <b>source-address</b> —Specific source address for the PIM group.                                                                                                                                                                                                                                                                                                    |
| <b>Required Privilege Level</b> | <p>view-level—To view this statement in the configuration.</p> <p>control-level—To add this statement to the configuration.</p>                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Example: Configuring PIM RPF Selection</li> </ul>                                                                                                                                                                                                                                                                             |



## source (PIM RPF Selection)

---

|                                 |                                                                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>source source-address {<br/>    next-hop next-hop-address;<br/>}</code>                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit routing-instances <i>routing-instance-name</i> protocols pim rpf-selection group <i>group-address</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim rpf-selection prefix-list <i>prefix-list-addresses</i> ] |
| <b>Release Information</b>      | Statement introduced in JUNOS Release 10.4.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                              |
| <b>Description</b>              | Configure the source address for the PIM group.                                                                                                                                                                                               |
| <b>Options</b>                  | <i>source-address</i> —Specific source address for the PIM group.<br><br>The remaining statements are explained separately.                                                                                                                   |
| <b>Required Privilege Level</b> | view-level—To view this statement in the configuration.<br>control-level—To add this statement to the configuration.                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Example: Configuring PIM RPF Selection</li></ul>                                                                                                                                                        |



## spt-threshold

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | spt-threshold {<br>infinity [ <i>policy-names</i> ];<br>}                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols pim],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim],<br>[edit protocols pim],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim]                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.0.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Set the SPT threshold to infinity for a source-group address pair. Last-hop multicast routing devices running PIM sparse mode can forward the same stream of multicast packets onto the same LAN through an RPT rooted at the RP or an SPT rooted at the source. By default, last-hop routing devices transition to a direct SPT to the source. You can configure this routing device to set the SPT transition value to infinity to prevent this transition for any source-group address pair.<br><br>The remaining statements are explained separately. |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring the PIM SPT Threshold Policy on page 3728</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                        |




## static (Protocols PIM)

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>static {<br/>  address address {<br/>    group-ranges {<br/>      destination-ip-prefix&lt;/prefix-length&gt;;<br/>    }<br/>    override;<br/>    version version;<br/>  }<br/>}</pre>                                                                                                                                                                                                                                                                                                                            |
| Hierarchy Level          | <p>[edit logical-systems <i>logical-system-name</i> protocols pim <b>rp</b>],<br/>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim <b>rp</b>],<br/>[edit protocols pim <b>rp</b>],<br/>[edit routing-instances <i>routing-instance-name</i> protocols pim <b>rp</b>]</p>                                                                                                                                                                                   |
| Release Information      | <p>Statement introduced before Junos OS Release 7.4.<br/>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br/>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                 |
| Description              | <p>Configure static RP addresses. The default static RP address is 224.0.0.0/4. To configure other addresses, include one or more <b>address</b> statements. You can configure a static RP in a logical system only if the logical system is not directly connected to a source.</p> <p>For each static RP address, you can optionally specify the PIM version and the groups for which this address can be the RP. The default PIM version is version 1.</p> <p>The remaining statements are explained separately.</p> |
| Required Privilege Level | <p>routing—To view this statement in the configuration.<br/>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                             |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Static PIM RP Address on the Non-RP Routing Device on page 3707</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                       |




## threshold (PIM BFD Detection Time)

|                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                                                                    | <code>threshold <i>milliseconds</i>;</code>                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                                                                           | [edit protocols pim interface <i>interface-name</i> bfd-liveness-detection detection-time],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> bfd-liveness-detection detection-time]                                                                                                                 |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                                                                       | Statement introduced in Junos OS Release 8.2.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Support for BFD authentication introduced in Junos OS Release 9.6.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                         |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                                                               | Specify the threshold for the adaptation of the BFD session detection time. When the detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.                                                                                                                                    |
| <div>  <p><b>NOTE:</b> The threshold value must be equal to or greater than the transmit interval.</p> <p>The threshold time must be equal to or greater than the value specified in the <a href="#">minimum-interval</a> or the <a href="#">minimum-receive-interval</a> statement.</p> </div> |                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                                                                                                                                                                                                                                                                                                                                                                   | <i>milliseconds</i> —Value for the detection time adaptation threshold.<br><b>Range:</b> 1 through 255,000                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                                                                  | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                                                                                     | <ul style="list-style-type: none"> <li>• <a href="#">Configuring BFD for PIM on page 3731</a></li> <li>• <a href="#">bfd-liveness-detection on page 3802</a></li> <li>• <a href="#">detection-time on page 3807</a></li> <li>• <a href="#">minimum-interval on page 3830</a></li> <li>• <a href="#">minimum-receive-interval on page 3832</a></li> </ul> |



## threshold (PIM BFD Transmit Interval)

---

|                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                             | <code>threshold <i>milliseconds</i>;</code>                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                    | [edit protocols pim interface <i>interface-name</i> bfd-liveness-detection transmit-interval],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> bfd-liveness-detection transmit-interval] |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                | Statement introduced in Junos OS Release 8.2.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                     |
| <b>Description</b>                                                                                                                                                                                                                                                                                                        | Specify the threshold for the adaptation of the BFD session transmit interval. When the transmit interval adapts to a value greater than the threshold, a single trap and a single system message are sent.                                    |
| <b>Options</b>                                                                                                                                                                                                                                                                                                            | <i>milliseconds</i> —Value for the transmit interval adaptation threshold.<br><b>Range:</b> 0 through 4,294,967,295 ( $2^{32} - 1$ )                                                                                                           |
| <div> <b>NOTE:</b> The threshold value specified in the <code>threshold</code> statement must be greater than the value specified in the <code>minimum-interval</code> statement for the <code>transmit-interval</code> statement.</div> |                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                           | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                            |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                              | <ul style="list-style-type: none"><li>• <a href="#">Configuring BFD for PIM on page 3731</a></li><li>• <a href="#">bfd-liveness-detection on page 3802</a></li></ul>                                                                           |



## transmit-interval (PIM BFD Liveness Detection)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>transmit-interval {     minimum-interval <i>milliseconds</i>;     threshold <i>milliseconds</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | <pre>[edit protocols pim interface <i>interface-name</i> bfd-liveness-detection], [edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i>   bfd-liveness-detection]</pre>                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 8.2.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for BFD authentication introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | <p>Specify the transmit interval for the <b>bfd-liveness-detection</b> statement. The negotiated transmit interval for a peer is the interval between the sending of BFD packets to peers. The receive interval for a peer is the minimum interval between receiving packets sent from its peer; the receive interval is not negotiated between peers. To determine the transmit interval, each peer compares its configured minimum transmit interval with its peer's minimum receive interval. The larger of the two numbers is accepted as the transmit interval for that peer.</p> <p>The remaining statements are explained separately.</p> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring BFD for PIM on page 3731</a></li> <li>• <a href="#">bfd-liveness-detection on page 3802</a></li> <li>• <a href="#">threshold on page 3856</a></li> <li>• <a href="#">minimum-interval on page 3831</a></li> <li>• <a href="#">minimum-receive-interval on page 3832</a></li> </ul>                                                                                                                                                                                                                                                                                              |



## traceoptions (Protocols PIM)

---

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>traceoptions {<br/>    file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;<br/>    flag <i>flag</i> &lt;flag-modifier&gt; &lt;disable&gt;;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>     | [edit logical-systems <i>logical-system-name</i> protocols pim],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols pim],<br>[edit protocols pim],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>         | <p>Configure PIM tracing options.</p> <p>To specify more than one tracing operation, include multiple <b>flag</b> statements.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Default</b>             | The default PIM trace options are those inherited from the routing protocol's <b>traceoptions</b> statement included at the [edit routing-options] hierarchy level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>             | <p><b>disable</b>—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as <b>all</b>.</p> <p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory <b>/var/log</b>. We recommend that you place tracing output in the <b>pim-log</b> file.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file named <b>trace-file</b> reaches its maximum size, it is renamed <b>trace-file.0</b>, then <b>trace-file.1</b>, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten.</p> <p>If you specify a maximum number of files, you must also include the <b>size</b> statement to specify the maximum file size.</p> <p><b>Range:</b> 2 through 1000 files</p> <p><b>Default:</b> 2 files</p> <p><b>flag <i>flag</i></b>—Tracing operation to perform. To specify more than one tracing operation, include multiple <b>flag</b> statements.</p> <p><b>PIM Tracing Flags</b></p> <ul style="list-style-type: none"><li>• <b>assert</b>—Assert messages</li><li>• <b>bidirectional-df-election</b>—Bidirectional PIM designated-forwarder (DF) election events</li></ul> |



- **bootstrap**—Bootstrap messages
- **cache**—Packets in the PIM sparse mode routing cache
- **graft**—Graft and graft acknowledgment messages
- **hello**—Hello packets
- **join**—Join messages
- **mt**—Multicast tunnel messages
- **nsr-synchronization**—Nonstop active routing (NSR) synchronization messages
- **packets**—All PIM packets
- **prune**—Prune messages
- **register**—Register and register stop messages
- **rp**—Candidate RP advertisements
- **all**—All tracing operations
- **general**—A combination of the **normal** and **route** trace operations
- **normal**—All normal operations

**Default:** If you do not specify this option, only unusual or abnormal operations are traced.

- **policy**—Policy operations and actions
- **route**—Routing table changes
- **state**—State transitions
- **task**—Interface transactions and processing
- **timer**—Timer usage

**flag-modifier**—(Optional) Modifier for the tracing flag. You can specify one or more of these modifiers:

- **detail**—Detailed trace information
- **receive**—Packets being received
- **send**—Packets being transmitted

**no-stamp**—(Optional) Do not place timestamp information at the beginning of each line in the trace file.

**Default:** If you omit this option, timestamp information is placed at the beginning of each line of the tracing output.



**no-world-readable**—(Optional) Do not allow users to read the log file.

**replace**—(Optional) Replace an existing trace file if there is one.

**Default:** If you do not include this option, tracing output is appended to an existing trace file.

**size size**—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches this size, it is renamed **trace-file.0**. When **trace-file** again reaches this size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

If you specify a maximum file size, you must also include the **files** statement to specify the maximum number of trace files.

**Syntax:** **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

**Range:** 0 KB through the maximum file size supported on your system

**Default:** 1 MB

**world-readable**—(Optional) Allow any user to read the log file.

|                                 |                                                                                                              |
|---------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing and trace—To view this statement in the configuration.                                               |
|                                 | routing-control and trace-control—To add this statement to the configuration.                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring PIM Trace Options on page 3690</a></li></ul> |
|                                 | <ul style="list-style-type: none"><li>• Tracing DVMRP Protocol Traffic</li></ul>                             |
|                                 | <ul style="list-style-type: none"><li>• <a href="#">Tracing MSDP Protocol Traffic on page 3769</a></li></ul> |
|                                 | <ul style="list-style-type: none"><li>• <a href="#">Configuring PIM Trace Options on page 3690</a></li></ul> |



## version (BFD)

---

|                                 |                                                                                                                                                                                                                           |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | version (0   1   automatic);                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit protocols piminterface <i>interface-name</i> <b>bfd-liveness-detection</b> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i> <b>bfd-liveness-detection</b> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.1.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                |
| <b>Description</b>              | Specify the bidirectional forwarding detection (BFD) protocol version that you want to detect.                                                                                                                            |
| <b>Options</b>                  | Configure the BFD version to detect: <b>1</b> (BFD version 1) or <b>automatic</b> (autodetect the BFD version)<br><b>Default:</b> automatic                                                                               |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring BFD for PIM on page 3731</a></li> </ul>                                                                                                                  |



## version (PIM)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>version version;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> protocols pim interface <i>interface-name</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> protocols pim <b>rp static address</b> <i>address</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code><br><code>pim interface <i>interface-name</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code><br><code>pim <b>rp static address</b> <i>address</i>],</code><br><code>[edit protocols pim interface <i>interface-name</i>],</code><br><code>[edit protocols pim <b>rp static address</b> <i>address</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols pim interface <i>interface-name</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols pim <b>rp static address</b> <i>address</i>]</code> |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Specify the version of PIM.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <b>version</b> —PIM version number.<br><b>Range:</b> 1 or 2<br><b>Default:</b> PIMv1 for rendezvous point (RP) mode (at the <code>[edit protocols pim rp static address <i>address</i>]</code> hierarchy level). PIMv2 for interface mode (at the <code>[edit protocols pim interface <i>interface-name</i>]</code> hierarchy level).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Enabling PIM Sparse Mode on page 3696</a></li><li>• <a href="#">Configuring PIM Dense Mode Properties</a></li><li>• <a href="#">Configuring PIM Sparse-Dense Mode Properties</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |



## wildcard-source (PIM RPF Selection)

|                                 |                                                                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | wildcard-source {<br>next-hop next-hop-address;<br>}                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit routing-instances <i>routing-instance-name</i> protocols pim rpf-selection group <i>group-address</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols pim rpf-selection prefix-list <i>prefix-list-addresses</i> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.4.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                           |
| <b>Description</b>              | Use a wildcard for the multicast source instead of (or in addition to) a specific multicast source.<br><br>The remaining statements are explained separately.                                                                                 |
| <b>Required Privilege Level</b> | view-level—To view this statement in the configuration.<br>control-level—To add this statement to the configuration.                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Example: Configuring PIM RPF Selection</li> </ul>                                                                                                                                                      |

## IGMP Configuration Statements

### accounting (Protocols IGMP)

|                                 |                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | accounting;                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp</b> ],<br>[edit protocols <b>igmp</b> ]                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.5.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series. |
| <b>Description</b>              | Enable the collection of IGMP join and leave event statistics on the system.                                                                                                               |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">Recording IGMP Join and Leave Events on page 3753</a></li> </ul>                                                                        |



## accounting (Protocols IGMP Interface)

---

|                                 |                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (accounting   no-accounting);                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp interface</b> <i>interface-name</i> ],<br>[edit protocols <b>igmp interface</b> <i>interface-name</i> ]                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.5.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series. |
| <b>Description</b>              | Enable or disable the collection of IGMP join and leave event statistics for an interface.                                                                                                 |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Recording IGMP Join and Leave Events on page 3753</a></li></ul>                                                                        |

## asm-override-ssm

---

|                                 |                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | asm-override-ssm;                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast],<br>[edit logical-systems <i>logical-system-name</i> routing-options multicast],<br>[edit routing-instances <i>routing-instance-name</i> routing-options multicast],<br>[edit routing-options multicast] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.4.<br>Statement introduced in Junos OS Release 9.5 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 12.3 for ACX Series routers.                                                                 |
| <b>Description</b>              | Enable the routing device to accept any-source multicast join messages (*;G) for group addresses that are within the default or configured range of source-specific multicast groups.                                                                                                                                               |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Source-Specific Multicast Groups with Any-Source Override on page 3788</a></li></ul>                                                                                                                                                                       |



## disable (Protocols IGMP)

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | disable;                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp interface</b> <i>interface-name</i> ],<br>[edit protocols <b>igmp interface</b> <i>interface-name</i> ]                     |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series. |
| <b>Description</b>              | Disable IGMP on the system.                                                                                                                                                                    |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Disabling IGMP on page 3757</a></li> </ul>                                                                                                |

## exclude (Protocols IGMP)


---

|                                 |                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | exclude;                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp interface</b> <i>interface-name</i> <b>static group</b> <i>mcast-group-address</i> ],<br>[edit protocols <b>igmp interface</b> <i>interface-name</i> <b>static group</b> <i>mcast-group-address</i> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.3.                                                                                                                                                                                                                            |
| <b>Description</b>              | Configure the static group to operate in exclude mode. In exclude mode all sources except the address configured are accepted for the group. If this statement is not included, the group operates in include mode.                                                      |
| <b>Required Privilege Level</b> | view-level—To view this statement in the configuration.<br>control-level—To add this statement to the configuration.                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Enabling IGMP Static Group Membership on page 3746</a></li> </ul>                                                                                                                                                   |



## group (Protocols IGMP)

---

|                                                                                                                                                              |                                                                                                                                                                                                                               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                                                                                                                                                       | <pre>group multicast-group-address {<br/>  exclude;<br/>  group-count number;<br/>  group-increment increment;<br/>  source ip-address {<br/>    source-count number;<br/>    source-increment increment;<br/>  }<br/>}</pre> |
| Hierarchy Level                                                                                                                                              | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp interface interface-name static</b> ],<br>[edit protocols <b>igmp interface interface-name static</b> ]                                                    |
| Release Information                                                                                                                                          | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                |
| Description                                                                                                                                                  | Specify the IGMP multicast group address and (optionally) the source address for the multicast group being statically configured on an interface.                                                                             |
| <div> <b>NOTE:</b> You must specify a unique address for each group.</div> |                                                                                                                                                                                                                               |
| The remaining statements are explained separately.                                                                                                           |                                                                                                                                                                                                                               |
| Required Privilege Level                                                                                                                                     | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                           |
| Related Documentation                                                                                                                                        | <ul style="list-style-type: none"><li>• <a href="#">Enabling IGMP Static Group Membership on page 3746</a></li></ul>                                                                                                          |



## group-count (Protocols IGMP)

|                                 |                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>group-count <i>number</i>;</code>                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp</b> interface <i>interface-name</i> <b>static group</b> <i>mcast-group-address</i> ],<br>[edit protocols <b>igmp</b> interface <i>interface-name</i> <b>static group</b> <i>mcast-group-address</i> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                       |
| <b>Description</b>              | Specify the number of static groups to be created.                                                                                                                                                                                                                       |
| <b>Options</b>                  | <i>number</i> —Number of static groups.<br><b>Default:</b><br><b>Range:</b> 1 through 512                                                                                                                                                                                |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Enabling IGMP Static Group Membership on page 3746</a></li> </ul>                                                                                                                                                   |

## group-increment (Protocols IGMP)

|                                 |                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>group-increment <i>increment</i>;</code>                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp</b> interface <i>interface-name</i> <b>static group</b> <i>mcast-group-address</i> ],<br>[edit protocols <b>igmp</b> interface <i>interface-name</i> <b>static group</b> <i>mcast-group-address</i> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                       |
| <b>Description</b>              | Configure the number of times the address should be incremented for each static group created. The increment is specified in dotted decimal notation similar to an IPv4 address.                                                                                         |
| <b>Options</b>                  | <i>increment</i> —Number of times the address should be incremented.<br><b>Default:</b> 0.0.0.1<br><b>Range:</b> 0.0.0.1 through 255.255.255.255                                                                                                                         |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Enabling IGMP Static Group Membership on page 3746</a></li> </ul>                                                                                                                                                   |



## group-limit

---

|                                 |                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>group-limit <i>limit</i>;</code>                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp interface</b> <i>interface-name</i> ],<br>[edit protocols <b>igmp interface</b> <i>interface-name</i> ]                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.4.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                        |
| <b>Description</b>              | <p>Configure a limit for the number of multicast groups (or [S,G] channels in IGMPv3) allowed on an interface. After this limit is reached, new reports are ignored and all related flows are not flooded on the interface.</p> <p>To confirm the configured group limit on the interface, use the <b>show igmp interface</b> command.</p> |
| <b>Default</b>                  | By default, there is no limit to the number of multicast groups that can join the interface.                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <b>limit</b> —group limit value for the interface.<br><b>Range:</b> 1 through 32767                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Limiting the Number of IGMP Multicast Group Joins on Logical Interfaces on page 3754</a></li><li>• <a href="#">group-threshold</a></li><li>• <a href="#">log-interval</a></li></ul>                                                                                                    |



---

## group-policy (Protocols IGMP)

---

|                                 |                                                                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>group-policy [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp</b> interface <i>interface-name</i> ],<br>[edit protocols <b>igmp</b> interface <i>interface-name</i> ]                                                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.1.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                |
| <b>Description</b>              | When this statement is enabled on a router running IGMP version 2 (IGMPv2) or version 3 (IGMPv3), after the router receives an IGMP report, the router compares the group against the specified group policy and performs the action configured in that policy (for example, rejects the report). |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Filtering Unwanted IGMP Reports at the IGMP Interface Level on page 3742</a></li></ul>                                                                                                                                                        |



## igmp

---

**Syntax**    `igmp {  
    accounting;  
    interface interface-name {  
        disable;  
        (accounting | no-accounting);  
        group-limit limit;  
        group-policy [ policy-names ];  
        group-threshold  
        immediate-leave;  
        log-interval  
        oif-map map-name;  
        passive;  
        promiscuous-mode;  
        ssm-map ssm-map-name;  
        ssm-map-policy ssm-map-policy-name;  
        static {  
            group multicast-group-address {  
                exclude;  
                group-count number;  
                group-increment increment;  
                source ip-address {  
                    source-count number;  
                    source-increment increment;  
                }  
            }  
        }  
        version version;  
    }  
    query-interval seconds;  
    query-last-member-interval seconds;  
    query-response-interval seconds;  
    robust-count number;  
    traceoptions {  
        file filename <files number> <size size> <world-readable | no-world-readable>;  
        flag flag <flag-modifier> <disable>;  
    }  
}`

**Hierarchy Level**    [edit logical-systems *logical-system-name* protocols],  
                          [edit protocols]

**Release Information**    Statement introduced before Junos OS Release 7.4.  
                              Statement introduced in Junos OS Release 12.1 for the QFX Series.

**Description**    Enable IGMP on the router. IGMP must be enabled for the router to receive multicast packets.


The remaining statements are explained separately.



|                                 |                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Default</b>                  | IGMP is disabled on the router. IGMP is automatically enabled on all broadcast interfaces when you configure Protocol Independent Multicast (PIM) or Distance Vector Multicast Routing Protocol (DVMRP). |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Enabling IGMP on page 3738</a></li></ul>                                                                                                             |



## immediate-leave (Protocols IGMP)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>immediate-leave;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp</b> interface <i>interface-name</i> ],<br>[edit protocols <b>igmp</b> interface <i>interface-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.3.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | <p>The immediate leave setting is useful for minimizing the leave latency of IGMP memberships. When this setting is enabled, the routing device leaves the multicast group immediately after the last host leaves the multicast group.</p> <p>Starting in Junos OS Release 9.3, both IGMP version 2 and IGMP version 3 do host tracking when the <b>immediate-leave</b> statement is configured. This means that the multicast group leaves only when the last host leaves. The routing device keeps track of the hosts that send join messages. This allows IGMP to determine when the last host sends a leave message for the multicast group.</p> <p>When the immediate leave setting is enabled, the device removes an interface from the forwarding-table entry without first sending IGMP group-specific queries to the interface. The interface is pruned from the multicast tree for the multicast group specified in the IGMP leave message. The immediate leave setting ensures optimal bandwidth management for hosts on a switched network, even when multiple multicast groups are being used simultaneously.</p> <p>When immediate leave is disabled and one host sends a leave group message, the routing device first sends a group query to determine if another receiver responds. If no receiver responds, the routing device removes all hosts on the interface from the multicast group. Immediate leave is disabled by default for both IGMP version 2 and IGMP version 3.</p> |
|                                 | <div>  <p><b>NOTE:</b> Although host tracking is enabled for IGMPv2 and MLDv1 when you enable immediate leave, use immediate leave with these versions only when there is one host on the interface. The reason is that IGMPv2 and MLDv1 use a report suppression mechanism whereby only one host on an interface sends a group join report in response to a membership query. The other interested hosts suppress their reports. The purpose of this mechanism is to avoid a flood of reports for the same group. But it also interferes with host tracking, because the router only knows about the one interested host and does not know about the others.</p> </div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



- Related Documentation**
- [Specifying Immediate-Leave Host Removal for IGMP on page 3741](#)

## interface (Protocols IGMP)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> interface <i>interface-name</i> {     disable;     (accounting   no-accounting);     group-limit <i>limit</i>;     group-policy [ <i>policy-names</i> ];     immediate-leave;     oif-map <i>map-name</i>;     passive;     promiscuous-mode;     ssm-map <i>ssm-map-name</i>;     ssm-map-policy <i>ssm-map-policy-name</i>;     static {         group <i>mcast-group-address</i> {             exclude;             group-count <i>number</i>;             group-increment <i>increment</i>;             source <i>ip-address</i> {                 source-count <i>number</i>;                 source-increment <i>increment</i>;             }         }     }     version <i>version</i>; } </pre> |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp</b> ],<br>[edit protocols <b>igmp</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | Enable IGMP on an interface and configure interface-specific properties.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <p><b><i>interface-name</i></b>—Name of the interface. Specify the full interface name, including the physical and logical address components. To configure all interfaces, you can specify <b>all</b>.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Enabling IGMP on page 3738</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



## maximum-transmit-rate (Protocols IGMP)

---

|                                 |                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | maximum-transmit-rate <i>packets-per-second</i> ;                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols igmp],<br>[edit protocols igmp]                                                                         |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.3.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                 |
| <b>Description</b>              | Limit the transmission rate of IGMP packets                                                                                                                        |
| <b>Options</b>                  | <b>packets-per-second</b> —Maximum number of IGMP packets transmitted in one second by the router.<br><b>Range:</b> 1 through 10000<br><b>Default:</b> 500 packets |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Limiting the Maximum IGMP Message Rate on page 3746</a></li></ul>                                              |


## oif-map

---

|                                 |                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | oif-map <i>map-name</i> ;                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp interface</b> <i>interface-name</i> ],<br>[edit protocols <b>igmp interface</b> <i>interface-name</i> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                         |
| <b>Description</b>              | Associates an outgoing interface (OIF) map to the IGMP interface. The OIF map is a routing policy statement that can contain multiple terms.                               |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Example: Configuring Multicast with Subscriber VLANs</li></ul>                                                                     |



## passive (IGMP)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>passive &lt;allow-receive&gt; &lt;send-general-query&gt; &lt;send-group-query&gt;;</code>                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp interface</b> <i>interface-name</i> ],<br>[edit protocols <b>igmp interface</b> <i>interface-name</i> ]                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6.<br><b>allow-receive</b> , <b>send-general-query</b> , and <b>send-group-query</b> options were added in Junos OS Release 10.0.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                               |
| <b>Description</b>              | Specify that IGMP run on the interface and either not send and receive control traffic or selectively send and receive control traffic such as IGMP reports, queries, and leaves.                                                                                                                                                                                               |
|                                 | <div>  <p><b>NOTE:</b> You can selectively activate up to two out of the three available options for the <b>passive</b> statement while keeping the other functions passive (inactive). Activating all three options would be equivalent to not using the <b>passive</b> statement.</p> </div> |
| <b>Options</b>                  | <p><b>allow-receive</b>—Enables IGMP to receive control traffic on the interface.</p> <p><b>send-general-query</b>—Enables IGMP to send general queries on the interface.</p> <p><b>send-group-query</b>—Enables IGMP to send group-specific and group-source-specific queries on the interface.</p>                                                                            |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Example: Configuring Multicast with Subscriber VLANs</li> <li><a href="#">Enabling IGMP on page 3738</a></li> </ul>                                                                                                                                                                                                                      |



## promiscuous-mode (Protocols IGMP)

---

|                                 |                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>promiscuous-mode;</code>                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit dynamic-profiles <i>profile-name</i> protocols igmp interface <i>interface-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> protocols <b>igmp</b> interface <i>interface-name</i> ],<br>[edit protocols <b>igmp</b> interface <i>interface-name</i> ]                                                                    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.3.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 9.2 for dynamic profiles.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                              |
| <b>Description</b>              | Specify that the interface accepts IGMP reports from hosts on any subnetwork. Note that when enabling promiscuous-mode, all routers on the ethernet segment must be configured with the promiscuous mode statement. Otherwise, only the interface configured with lowest IPv4 address acts as the querier for IGMP for this Ethernet segment. |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring a Dynamic Profile for Client Access</li><li><a href="#">Accepting IGMP Messages from Remote Subnetworks on page 3743</a></li></ul>                                                                                                                                                          |

## query-interval (Protocols IGMP)

---

|                                 |                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>query-interval <i>seconds</i>;</code>                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp</b> ],<br>[edit protocols <b>igmp</b> ]                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                             |
| <b>Description</b>              | Specify how often the querier router sends general host-query messages.                                                                                                                                                                                                                    |
| <b>Options</b>                  | <b>seconds</b> —Time interval.<br><b>Range:</b> 1 through 1024<br><b>Default:</b> 125 seconds                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li><a href="#">Modifying the IGMP Host-Query Message Interval on page 3739</a></li><li><a href="#">query-last-member-interval (Protocols IGMP) on page 3877</a></li><li><a href="#">query-response-interval (Protocols IGMP) on page 3878</a></li></ul> |



## query-last-member-interval (Protocols IGMP)

---

|                                 |                                                                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | query-last-member-interval <i>seconds</i> ;                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">igmp</a> ],<br>[edit protocols <a href="#">igmp</a> ]                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                          |
| <b>Description</b>              | Specify how often the querier router sends group-specific query messages.                                                                                                                                                                                                               |
| <b>Options</b>                  | <b>seconds</b> —Time interval, in fractions of a second or seconds.<br><b>Range:</b> 0.1 through 0.9, then in 1-second intervals 1 through 999999<br><b>Default:</b> 1 second                                                                                                           |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Modifying the IGMP Last-Member Query Interval on page 3740</a></li> <li>• <a href="#">query-interval (Protocols IGMP) on page 3876</a></li> <li>• <a href="#">query-response-interval (Protocols IGMP) on page 3878</a></li> </ul> |



## query-response-interval (Protocols IGMP)

---

|                                 |                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>query-response-interval <i>seconds</i>;</code>                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">igmp</a> ],<br>[edit protocols <a href="#">igmp</a> ]                                                                                                                                                        |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                      |
| <b>Description</b>              | Specify how long the querier router waits to receive a response to a host-query message from a host.                                                                                                                                                                                |
| <b>Options</b>                  | <b><i>seconds</i></b> —The query response interval must be less than the query interval.<br><b>Range:</b> 1 through 1024<br><b>Default:</b> 10 seconds                                                                                                                              |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Modifying the IGMP Query Response Interval on page 3744</a></li><li>• <a href="#">query-interval (Protocols IGMP) on page 3876</a></li><li>• <a href="#">query-last-member-interval (Protocols IGMP) on page 3877</a></li></ul> |



---

## robust-count (Protocols IGMP)

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>robust-count <i>number</i>;</code>                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">igmp</a> ],<br>[edit protocols <a href="#">igmp</a> ]                                                                   |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series. |
| <b>Description</b>              | Tune the expected packet loss on a subnet. This factor is used to calculate the group member interval, other querier present interval, and last-member query count.                            |
| <b>Options</b>                  | <i>number</i> —Robustness variable.<br><b>Range:</b> 2 through 10<br><b>Default:</b> 2                                                                                                         |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Modifying the IGMP Robustness Variable on page 3745</a></li></ul>                                                                          |



## source (Protocols IGMP)

---

|                                 |                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>source <i>ip-address</i> {<br/>    <i>source-count</i> <i>number</i>;<br/>    <i>source-increment</i> <i>increment</i>;<br/>}</code>                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp</b> <b>interface</b> <i>interface-name</i> <b>static group</b> <i>multicast-group-address</i> ],<br>[edit protocols <b>igmp</b> <b>interface</b> <i>interface-name</i> <b>static group</b> <i>multicast-group-address</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                 |
| <b>Description</b>              | Specify the IP version 4 (IPv4) unicast source address for the multicast group being statically configured on an interface.                                                                                                                                                                    |
| <b>Options</b>                  | <i>ip-address</i> —IPv4 unicast address.<br><br>The remaining statements are explained separately.                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Enabling IGMP Static Group Membership on page 3746</a></li></ul>                                                                                                                                                                           |



## source-count (Protocols IGMP)

|                                 |                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>source-count <i>number</i>;</code>                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp</b> interface <i>interface-name</i> <b>static group multicast-group-address</b> <b>source</b> ],<br>[edit protocols <b>igmp</b> interface <i>interface-name</i> <b>static group multicast-group-address</b> <b>source</b> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                             |
| <b>Description</b>              | Configure the number of multicast source addresses that should be accepted for each static group created.                                                                                                                                                                                      |
| <b>Options</b>                  | <i>number</i> —Number of source addresses.<br><b>Default:</b> 1<br><b>Range:</b> 1 through 1024                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Enabling IGMP Static Group Membership on page 3746</a></li> </ul>                                                                                                                                                                         |

## source-increment (Protocols IGMP)

|                                 |                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>source-increment <i>number</i>;</code>                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp</b> interface <i>interface-name</i> <b>static group multicast-group-address</b> <b>source</b> ],<br>[edit protocols <b>igmp</b> interface <i>interface-name</i> <b>static group multicast-group-address</b> <b>source</b> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                             |
| <b>Description</b>              | Configure the number of times the multicast source address should be incremented for each static group created. The increment is specified in dotted decimal notation similar to an IPv4 address.                                                                                              |
| <b>Options</b>                  | <i>increment</i> —Number of times the source address should be incremented.<br><b>Default:</b> 0.0.0.1<br><b>Range:</b> 0.0.0.1 through 255.255.255.255                                                                                                                                        |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Enabling IGMP Static Group Membership on page 3746</a></li> </ul>                                                                                                                                                                         |



## static (Protocols IGMP)

---

**Syntax**    static {  
              group *multicast-group-address* {  
                  exclude;  
                  group-count *number*;  
                  group-increment *increment*;  
                  source *ip-address* {  
                      source-count *number*;  
                      source-increment *increment*;  
                  }  
              }  
          }  
      }

**Hierarchy Level**    [edit logical-systems *logical-system-name* protocols **igmp** interface *interface-name*],  
                          [edit protocols **igmp** interface *interface-name*]

**Release Information**    Statement introduced before Junos OS Release 7.4.  
                              Statement introduced in Junos OS Release 9.0 for EX Series switches.  
                              Statement introduced in Junos OS Release 12.1 for the QFX Series.

**Description**    Test multicast forwarding on an interface without a receiver host.

The **static** statement simulates IGMP joins on a routing device statically on an interface without any IGMP hosts. It is supported for both IGMPv2 and IGMPv3 joins. This statement is especially useful for testing multicast forwarding on an interface without a receiver host.



.....  
**NOTE:** To prevent joining too many groups accidentally, the **static** statement is not supported with the **interface all** statement.  
.....

The remaining statements are explained separately.

**Required Privilege Level**    routing and trace—To view this statement in the configuration.  
                                  routing-control and trace-control—To add this statement to the configuration.

**Related Documentation**    • [Enabling IGMP Static Group Membership on page 3746](#)



## traceoptions (Protocols IGMP)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>traceoptions {     file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i> &lt;flag-modifier&gt; &lt;disable&gt;; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>     | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp</b> ],<br>[edit protocols <b>igmp</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>         | <p>Configure IGMP tracing options.</p> <p>To specify more than one tracing operation, include multiple <b>flag</b> statements.</p> <p>To trace the paths of multicast packets, use the <b>mtrace</b> command.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Default</b>             | The default IGMP trace options are those inherited from the routing protocols <b>traceoptions</b> statement included at the [edit routing-options] hierarchy level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>             | <p><b>disable</b>—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as <b>all</b>.</p> <p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory <b>/var/log</b>. We recommend that you place tracing output in the file <b>igmp-log</b>.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file named <b>trace-file</b> reaches its maximum size, it is renamed <b>trace-file.0</b>, then <b>trace-file.1</b>, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten.</p> <p>If you specify a maximum number of files, you must also include the <b>size</b> statement to specify the maximum file size.</p> <p><b>Range:</b> 2 through 1000 files</p> <p><b>Default:</b> 2 files</p> <p><b>flag</b>—Tracing operation to perform. To specify more than one tracing operation, include multiple <b>flag</b> statements.</p> <p><b>IGMP Tracing Flags</b></p> <ul style="list-style-type: none"> <li><b>leave</b>—Leave group messages (for IGMP version 2 only).</li> <li><b>mtrace</b>—Mtrace packets. Use the <b>mtrace</b> command to troubleshoot the software.</li> <li><b>packets</b>—All IGMP packets.</li> </ul> |



- **query**—IGMP membership query messages, including general and group-specific queries.
- **report**—Membership report messages.

#### Global Tracing Flags

- **all**—All tracing operations
- **general**—A combination of the **normal** and **route** trace operations
- **normal**—All normal operations

**Default:** If you do not specify this option, only unusual or abnormal operations are traced.

- **policy**—Policy operations and actions
- **route**—Routing table changes
- **state**—State transitions
- **task**—Interface transactions and processing
- **timer**—Timer usage

**flag-modifier**—(Optional) Modifier for the tracing flag. You can specify one or more of these modifiers:

- **detail**—Detailed trace information
- **receive**—Packets being received
- **send**—Packets being transmitted

**no-stamp**—(Optional) Do not place timestamp information at the beginning of each line in the trace file.

**Default:** If you omit this option, timestamp information is placed at the beginning of each line of the tracing output.

**no-world-readable**—(Optional) Do not allow users to read the log file.

**replace**—(Optional) Replace an existing trace file if there is one.

**Default:** If you do not include this option, tracing output is appended to an existing trace file.

**size size**—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches this size, it is renamed **trace-file.0**. When **trace-file** again reaches this size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.



If you specify a maximum file size, you must also include the **files** statement to specify the maximum number of trace files.

**Syntax:** *xk* to specify KB, *xm* to specify MB, or *xg* to specify GB

**Range:** 10 KB through the maximum file size supported on your system

**Default:** 1 MB

**world-readable**—(Optional) Allow any user to read the log file.

**Required Privilege Level** routing and trace—To view this statement in the configuration.  
routing-control and trace-control—To add this statement to the configuration.

**Related Documentation** • [Tracing IGMP Protocol Traffic on page 3755](#)

## version (Protocols IGMP)

**Syntax** `version version;`

**Hierarchy Level** [edit logical-systems *logical-system-name* protocols **igmp interface** *interface-name*],  
[edit protocols **igmp interface** *interface-name*]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 12.1 for the QFX Series.

**Description** Specify the version of IGMP.

**Options** **version**—IGMP version number.

**Range:** 1, 2, or 3

**Default:** IGMP version 2

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation** • [Changing the IGMP Version on page 3739](#)



## IGMP Snooping Configuration Statements

---

### data-forwarding

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>data-forwarding {<br/>  receiver {<br/>    source-vlans <i>vlan-list</i>;<br/>    install;<br/>  }<br/>  source {<br/>    groups <i>group-prefix</i>;<br/>  }<br/>}</pre>                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit protocols igmp-snooping vlan (all   <i>vlan-name</i> )]                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6 for EX Series switches.<br>Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | <p>Configure the VLAN to be a multicast source VLAN (MVLAN) or a multicast VLAN registration (MVR) receiver VLAN. Each data-forwarding VLAN, which can be a multicast source VLAN (MVLAN) or a multicast receiver VLAN, must have exactly one source statement or exactly one receiver statement. A data-forwarding VLAN can operate only in IGMP version 2 (IGMPv2) mode.</p> <p>The remaining statements are explained separately.</p> |
| <b>Default</b>                  | Disabled                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Multicast VLAN Registration on page 3763</a></li><li>• <a href="#">Configuring Multicast VLAN Registration (CLI Procedure) on page 3762</a></li></ul>                                                                                                                                                                                                           |



## disable (IGMP Snooping)

---

|                                 |                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>disable {<br/>    interface <i>interface-name</i>;<br/>}</code>                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit protocols <a href="#">igmp-snooping</a> <a href="#">vlan</a> <i>vlan-name</i> ]                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                     |
| <b>Description</b>              | Disable IGMP snooping on all interfaces in a VLAN or on a specific VLAN interface.                                                                                                    |
| <b>Default</b>                  | If you do not specify an interface, all interfaces in the given VLAN are disabled (because IGMP snooping is disabled by default).                                                     |
| <b>Options</b>                  | <i>interface-name</i> —Name of the interface.                                                                                                                                         |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IGMP Snooping on page 3759</a></li> <li>• <a href="#">Configuring IGMP Snooping on page 3758</a></li> </ul> |

## disable interface (IGMP Snooping)

---

|                                 |                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>disable interface <i>interface-name</i></code>                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit protocols <a href="#">igmp-snooping</a> <a href="#">vlan</a> <i>vlan-name</i> ]                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                     |
| <b>Description</b>              | Disable IGMP snooping on an interface in a VLAN. (IGMP snooping is disabled by default.)                                                                                              |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IGMP Snooping on page 3759</a></li> <li>• <a href="#">Configuring IGMP Snooping on page 3758</a></li> </ul> |



## group (IGMP Snooping)

---

|                                 |                                                                                                                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>group ip-address;</code>                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit protocols <b>igmp-snooping</b> <b>vlan</b> <i>vlan-name</i> <b>interface</b> <i>interface-name</i> <b>static</b> ]                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                  |
| <b>Description</b>              | Configure a static multicast group using a valid IP multicast address.                                                                                                                                                                             |
| <b>Default</b>                  | None.                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <i>ip-address</i> —IP address of the multicast group receiving data on an interface.                                                                                                                                                               |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show igmp-snooping vlans on page 3978</a></li><li>• <a href="#">Example: Configuring IGMP Snooping on page 3759</a></li><li>• <a href="#">Configuring IGMP Snooping on page 3758</a></li></ul> |

## groups (Multicast VLAN Registration)

---

|                                 |                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>groups group-prefix;</code>                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit protocols <b>igmp-snooping</b> <b>vlan</b> (all   <i>vlan-name</i> ) <b>data-forwarding</b> <b>source</b> ]                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6 for EX Series switches.<br>Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                      |
| <b>Description</b>              | Specify the IP address range of the multicast VLAN (MVLAN) source interfaces.                                                                                                                                                  |
| <b>Default</b>                  | Disabled                                                                                                                                                                                                                       |
| <b>Options</b>                  | <i>group-prefix</i> —IP address range of the source group. Each MVLAN must have exactly one <b>groups</b> statement. If there are multiple MVLANs on the switch, their group ranges must be unique.                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Multicast VLAN Registration on page 3763</a></li><li>• <a href="#">Configuring Multicast VLAN Registration (CLI Procedure) on page 3762</a></li></ul> |



---

## igmp-querier

---

|                                 |                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | igmp-querier <a href="#">source-address</a> <i>source address</i> ;                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit protocols <a href="#">igmp-snooping</a> <a href="#">vlan</a> <i>vlan-name</i> ]                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Configure the switch to be an IGMP querier. If there are any multicast routers on the same local network, make sure the source address for the IGMP querier is greater (a higher number) than the IP addresses for those routers on the network. This ensures that switch is always the IGMP querier on the network.        |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IGMP Snooping on page 3759</a></li><li>• <a href="#">Configuring IGMP Snooping on page 3758</a></li><li>• <a href="#">show igmp-snooping vlans on page 3978</a></li><li>• <a href="#">show configuration protocols igmp on page 3958</a></li></ul> |



## igmp-snooping

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>igmp-snooping {   traceoptions {     file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt; &lt;match       <i>regex</i>&gt;;     flag <i>flag</i> (detail   disable   receive   send);   }   vlan <i>vlan-name</i> {     data-forwarding {       source {         groups <i>group-prefix</i>;       }       receiver {         source-vlans <i>vlan-list</i>;         install;       }     }   }   disable {     interface <i>interface-name</i>;   }   immediate-leave;   interface <i>interface-name</i> {     multicast-router-interface;     static {       group <i>ip-address</i>;     }   }   robust-count <i>number</i>;   version <i>number</i>; }</pre> |
| <b>Hierarchy Level</b>          | [edit protocols]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.<br><b>version</b> statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | Enable and configure IGMP snooping.<br><br>The remaining statements are explained separately.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Default</b>                  | IGMP snooping is disabled by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IGMP Snooping on page 3759</a></li><li>• <a href="#">Configuring IGMP Snooping on page 3758</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |



## install (Multicast VLAN Registration)

|                                 |                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | install;                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit protocols igmp-snooping vlan (all   <i>vlan-name</i> ) data-forwarding receiver]                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6 for EX Series switches.<br>Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                         |
| <b>Description</b>              | Install forwarding entries in the multicast receiver VLAN. By default, the multicast VLAN (MVLAN) installs forwarding entries for MVLAN groups only.                                                                              |
| <b>Default</b>                  | Disabled                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Multicast VLAN Registration on page 3763</a></li> <li>• <a href="#">Configuring Multicast VLAN Registration (CLI Procedure) on page 3762</a></li> </ul> |

## interface (IGMP Snooping)

|                                 |                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>interface <i>interface-name</i> {     multicast-router-interface;     static {         group <i>ip-address</i>;     } }</pre>                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit protocols <b>igmp-snooping</b> vlan <i>vlan-name</i> ]                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                      |
| <b>Description</b>              | Enable IGMP snooping on an interface and configure interface-specific properties.<br><br>The remaining statements are explained separately.                                                                                                            |
| <b>Options</b>                  | <i>interface-name</i> —Name of the interface.                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IGMP Snooping on page 3759</a></li> <li>• <a href="#">Configuring IGMP Snooping on page 3758</a></li> <li>• <a href="#">show igmp-snooping vlans on page 3978</a></li> </ul> |



## multicast-router-interface (IGMP Snooping)

---

|                                 |                                                                                                                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>multicast-router-interface;</code>                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit protocols <a href="#">igmp-snooping</a> <a href="#">vlan</a> <i>vlan-name</i> <a href="#">interface</a> <i>interface-name</i> ]                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                  |
| <b>Description</b>              | Configure an interface to forward IGMP messages to multicast routers.                                                                                                                                                                              |
| <b>Default</b>                  | Disabled. If this statement is disabled, the interface drops IGMP messages it receives.                                                                                                                                                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show igmp-snooping vlans on page 3978</a></li><li>• <a href="#">Example: Configuring IGMP Snooping on page 3759</a></li><li>• <a href="#">Configuring IGMP Snooping on page 3758</a></li></ul> |

## proxy (Multicast VLAN Registration)

---

|                                 |                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>proxy source-address <i>ip-address</i>;</code>                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit protocols <a href="#">igmp-snooping</a> <a href="#">vlan</a> (all   <i>vlan-name</i> )]                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6 for EX Series switches.<br>Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                      |
| <b>Description</b>              | Specify that the VLAN operate in proxy mode. The proxy option is supported only for a VLAN acting as a data-forwarding source.                                                                                                 |
| <b>Default</b>                  | Disabled                                                                                                                                                                                                                       |
| <b>Options</b>                  | <code>source-address <i>ip-address</i></code> —IP address of the source VLAN to act as proxy.                                                                                                                                  |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Multicast VLAN Registration on page 3763</a></li><li>• <a href="#">Configuring Multicast VLAN Registration (CLI Procedure) on page 3762</a></li></ul> |



## receiver

|                                 |                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>receiver {   source-vlans <i>vlan-list</i>;   install; }</pre>                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit protocols igmp-snooping vlan (all   <i>vlan-name</i> ) data-forwarding]                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6 for EX Series switches.<br>Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                         |
| <b>Description</b>              | Configure a VLAN as a multicast receiver VLAN of the multicast VLAN (MVLAN).<br><br>The remaining statements are explained separately.                                                                                            |
| <b>Default</b>                  | Disabled                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Multicast VLAN Registration on page 3763</a></li> <li>• <a href="#">Configuring Multicast VLAN Registration (CLI Procedure) on page 3762</a></li> </ul> |

## robust-count (IGMP Snooping)

|                                 |                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | robust-count <i>number</i> ;                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit protocols <b>igmp-snooping</b> vlan <i>vlan-name</i> ]                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                      |
| <b>Description</b>              | Configure the number of intervals the switch waits before removing a multicast group from the multicast forwarding table. Configure the length of each interval using the <b>query-interval</b> statement.                                             |
| <b>Default</b>                  | 2 intervals                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <i>number</i> —Number of intervals the switch waits before timing out a multicast group.<br><b>Range:</b> 2 through 10                                                                                                                                 |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IGMP Snooping on page 3759</a></li> <li>• <a href="#">Configuring IGMP Snooping on page 3758</a></li> <li>• <a href="#">show igmp-snooping vlans on page 3978</a></li> </ul> |



## source (Multicast VLAN Registration)

---

|                                 |                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>source {<br/>    groups <i>group-prefix</i>;<br/>}</code>                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit protocols igmp-snooping vlan (all   <i>vlan-name</i> ) data-forwarding]                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6 for EX Series switches.<br>Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                      |
| <b>Description</b>              | Configure a VLAN to be a multicast source VLAN (MVLAN).<br><br>The remaining statement is explained separately.                                                                                                                |
| <b>Default</b>                  | Disabled                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Multicast VLAN Registration on page 3763</a></li><li>• <a href="#">Configuring Multicast VLAN Registration (CLI Procedure) on page 3762</a></li></ul> |

## source-address (IGMP Querier)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>src-address <i>source address</i>;</code>                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit protocols <b>igmp-snooping</b> vlan <i>vlan-name</i> <b>igmp-querier</b> ]                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | Configure the address that the switch uses as the source address in the IGMP queries that it sends. If there are any multicast routers on the same local network, make sure the source address for the IGMP querier is greater (a higher number) than the IP addresses for those routers on the network. This ensures that switch is always the IGMP querier on the network. |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IGMP Snooping on page 3759</a></li><li>• <a href="#">Configuring IGMP Snooping on page 3758</a></li><li>• <a href="#">show igmp-snooping vlans on page 3978</a></li><li>• <a href="#">show configuration protocols igmp on page 3958</a></li></ul>                                                  |



## source-vlans

|                                 |                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>source-vlans <i>vlan-list</i>;</code>                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit protocols igmp-snooping vlan (all   <i>vlan-name</i> ) data-forwarding receiver]                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6 for EX Series switches.<br>Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                         |
| <b>Description</b>              | Specify a list of multicast VLANs (MVLANS) from which this multicast receiver VLAN receives multicast traffic. Either all of these MVLANS must be in proxy mode or none of them can be in proxy mode.                             |
| <b>Default</b>                  | Disabled                                                                                                                                                                                                                          |
| <b>Options</b>                  | <i>vlan-list</i> —Names of the MVLANS.                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Multicast VLAN Registration on page 3763</a></li> <li>• <a href="#">Configuring Multicast VLAN Registration (CLI Procedure) on page 3762</a></li> </ul> |

## static (IGMP Snooping)

|                                 |                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>static {   group <i>ip-address</i>; }</pre>                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit protocols <b>igmp-snooping</b> vlan <i>vlan-name</i> <b>interface</b> <i>interface-name</i> ]                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                      |
| <b>Description</b>              | <p>Statically define multicast groups on an interface.</p> <p>The remaining statement is explained separately.</p>                                                                                                                                     |
| <b>Default</b>                  | No multicast groups are statically defined.                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IGMP Snooping on page 3759</a></li> <li>• <a href="#">Configuring IGMP Snooping on page 3758</a></li> <li>• <a href="#">show igmp-snooping vlans on page 3978</a></li> </ul> |



## traceoptions (IGMP Snooping)

---

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax              | <pre>traceoptions {<br/>    file <i>filename</i> &lt;files <i>number</i>&gt; &lt;no-stamp&gt; &lt;size <i>size</i>&gt; &lt;replace&gt; &lt;world-readable  <br/>    no-world-readable&gt;;<br/>    flag <i>flag</i> (detail   disable   receive   send);<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Hierarchy Level     | [edit protocols <a href="#">igmp-snooping</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Release Information | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Description         | Define tracing operations for IGMP snooping.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Default             | The <b>traceoptions</b> feature is disabled by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Options             | <p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory <b>/var/log</b>.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file named <b>trace-file</b> reaches its maximum size, it is renamed <b>trace-file.0</b>, then <b>trace-file.1</b>, and so on, until the maximum number of trace files is reached (<b>xk</b> to specify KB, <b>xm</b> to specify MB, or <b>xg</b> to specify gigabytes), at which point the oldest trace file is overwritten. If you specify a maximum number of files, you also must specify a maximum file size with the <b>size</b> option.</p> <p><b>Range:</b> 2 through 1000</p> <p><b>Default:</b> 3 files</p> <p><b>flag <i>flag</i></b> —Tracing operation to perform. To specify more than one tracing operation, include multiple flag statements. You can include the following flags:</p> <ul style="list-style-type: none"><li>• <b>all</b>—All tracing operations.</li><li>• <b>general</b>—Trace general IGMP snooping protocol events.</li><li>• <b>krt</b>—Trace communication over routing sockets.</li><li>• <b>nexthop</b>— Trace next-hop related events.</li><li>• <b>normal</b>—Trace normal IGMP snooping protocol events.</li><li>• <b>packets</b>—Trace all IGMP packets.</li><li>• <b>policy</b>—Trace policy processing.</li><li>• <b>query</b>—Trace IGMP membership query messages.</li><li>• <b>report</b>—Trace membership report messages.</li><li>• <b>route</b>—Trace routing information.</li><li>• <b>state</b>—Trace IGMP state transitions.</li><li>• <b>task</b>—Trace routing protocol task processing.</li></ul> |



- **timer**—Trace routing protocol timer processing.
- **vlan**—Trace VLAN related events.

**no-stamp**—(Optional) Do not time stamp trace file.

**no-world-readable**—(Optional) Restrict file access to the user who created the file.

**size size** —(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches its maximum size, it is renamed **trace-file.0**, then **trace-file.1**, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten. If you specify a maximum number of files, you also must specify a maximum file size with the **files** option. Use **xk** to specify KB, **xm** to specify MB, or **xg** to specify gigabytes.

**Range:** 10 KB through 1 gigabytes

**Default:** 128 KB

**world-readable**—(Optional) Enable unrestricted file access.

|                                 |                                                             |
|---------------------------------|-------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.        |
|                                 | routing-control—To add this statement to the configuration. |

|                              |                                                                                                                                                                                       |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IGMP Snooping on page 3759</a></li> <li>• <a href="#">Configuring IGMP Snooping on page 3758</a></li> </ul> |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



## vlan (IGMP Snooping)

---

**Syntax**    `vlan vlan-name {  
              disable {  
                  interface interface-name;  
              }  
              immediate-leave;  
              interface interface-name {  
                  multicast-router-interface;  
                  static {  
                      group ip-address;  
                  }  
              }  
              version number;  
          }`

**Hierarchy Level**    [edit protocols [igmp-snooping](#)]

**Release Information**    Statement introduced in Junos OS Release 11.1 for the QFX Series.  
                              **version** statement introduced in Junos OS Release 12.1 for the QFX Series.

**Description**    Configure IGMP snooping parameters for a VLAN.

The remaining statements are explained separately.



**TIP:** To display a list of all configured VLANs on the system, including VLANs that are configured but not committed, type ? after `vlan` or `vlangs` in your configuration mode command line. Note that only one VLAN is displayed for a VLAN range. For IGMP snooping, secondary private VLANs are not listed.

**Default**    IGMP snooping options apply to the specified VLAN.

**Options**    *vlan-name*—Name of a VLAN.

**Required Privilege Level**    routing—To view this statement in the configuration.  
                                  routing-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring IGMP Snooping on page 3759](#)
- [Configuring IGMP Snooping on page 3758](#)
- [show igmp-snooping vlans on page 3978](#)



## version (IGMP Snooping)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>version <i>number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit protocols igmp-snooping vlan (all   <i>vlan-name</i> )]                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Specify the IGMP version for the IGMP general query that the switch sends to hosts when an interface comes up. The configured IGMP version affects only the version of the general queries sent by a switch. It does not affect the version of IGMP messages that the switch can snoop. For example, If the switch is configured for IGMP version 1 (IGMPv1), it can snoop IGMPv2 and IGMPv3 messages. |
| <b>Default</b>                  | If you do not configure the <b>version</b> statement, the default is IGMPv2.                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <b>version</b> —IGMP version number.<br><b>Range:</b> 1 through 3                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring IGMP Snooping (CLI Procedure)</li> <li><a href="#">Configuring IGMP Snooping on page 3758</a></li> </ul>                                                                                                                                                                                                                                            |



## MSDP Configuration Statements

### active-source-limit

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>active-source-limit {   log-interval <i>seconds</i>;   log-warning <i>value</i>;   maximum <i>number</i>;   threshold <i>number</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | <pre>[edit logical-systems <i>logical-system-name</i> protocols <b>msdp</b>], [edit logical-systems <i>logical-system-name</i> protocols <b>msdp</b> group <i>group-name</i> peer <i>address</i>], [edit logical-systems <i>logical-system-name</i> protocols <b>msdp</b> peer <i>address</i>], [edit logical-systems <i>logical-system-name</i> protocols <b>msdp</b> source <i>ip-address/prefix-length</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>instance-name</i> protocols <b>msdp</b>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   <b>msdp</b> group <i>group-name</i> peer <i>address</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   <b>msdp</b> peer <i>address</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   <b>msdp</b> source <i>ip-address/prefix-length</i>], [edit protocols <b>msdp</b>], [edit protocols <b>msdp</b> group <i>group-name</i> peer <i>address</i>], [edit protocols <b>msdp</b> peer <i>address</i>], [edit protocols <b>msdp</b> source <i>ip-address/prefix-length</i>], [edit routing-instances <i>routing-instance-name</i> protocols <b>msdp</b>], [edit routing-instances <i>routing-instance-name</i> protocols <b>msdp</b> group <i>group-name</i>   peer <i>address</i>], [edit routing-instances <i>routing-instance-name</i> protocols <b>msdp</b> peer <i>address</i>], [edit routing-instances <i>routing-instance-name</i> protocols <b>msdp</b> source   <i>ip-address/prefix-length</i>]</pre> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Limit the number of active source messages the routing device accepts.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Default</b>                  | If you do not include this statement, the router accepts any number of MSDP active source messages.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>                  | The options are explained separately.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring MSDP with Active Source Limits and Mesh Groups on page 3773</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |



## authentication-key

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>authentication-key <i>peer-key</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <code>msdp group <i>group-name</i> peer <i>address</i></code>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols <code>msdp peer <i>address</i></code>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <code>msdp group <i>group-name</i> peer <i>address</i></code>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <code>msdp peer <i>address</i></code>],</p> <p>[edit protocols <code>msdp group <i>group-name</i> peer <i>address</i></code>],</p> <p>[edit protocols <code>msdp peer <i>address</i></code>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <code>msdp group <i>group-name</i> peer <i>address</i></code>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <code>msdp peer <i>address</i></code>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Associate a Message Digest 5 (MD5) signature option authentication key with an MSDP peering session.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Default</b>                  | If you do not include this statement, the router accepts any valid MSDP messages from the peer address.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <b><i>peer-key</i></b> —MD5 authentication key. The peer key can be a text string up to 16 letters and digits long. Strings can include any ASCII characters with the exception of (, ), &, and [. If you include spaces in an MSDP authentication key, enclose all characters in quotation marks (" ").                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Example: Configuring MSDP in a Routing Instance</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |



## data-encapsulation

---

|                                 |                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>data-encapsulation (disable   enable);</code>                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">msdp</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp</a> ],<br>[edit protocols <a href="#">msdp</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                      |
| <b>Description</b>              | Configure a rendezvous point (RP) using MSDP to encapsulate multicast data received in MSDP register messages inside forwarded MSDP source-active messages.                                                                                                                                                                                                 |
| <b>Default</b>                  | If you do not include this statement, the RP encapsulates multicast data.                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <b>disable</b> —(Optional) Do not use MSDP data encapsulation.<br><b>enable</b> —Use MSDP data encapsulation.<br><b>Default:</b> <b>enable</b>                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <b>routing</b> —To view this statement in the configuration.<br><b>routing-control</b> —To add this statement to the configuration.                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring MSDP with Active Source Limits and Mesh Groups on page 3773</a></li></ul>                                                                                                                                                                                                          |



## default-peer

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | default-peer;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <b>msdp</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols <b>msdp group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols <b>msdp group</b> <i>group-name</i> <b>peer</b> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols <b>msdp peer</b> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>msdp</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>msdp group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>msdp group</b> <i>group-name</i> <b>peer</b> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>msdp peer</b> <i>address</i>],</p> <p>[edit protocols <b>msdp</b>],</p> <p>[edit protocols <b>msdp group</b> <i>group-name</i>],</p> <p>[edit protocols <b>msdp group</b> <i>group-name</i> <b>peer</b> <i>address</i>],</p> <p>[edit protocols <b>msdp peer</b> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <b>msdp</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <b>msdp group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <b>msdp group</b> <i>group-name</i> <b>peer</b> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <b>msdp peer</b> <i>address</i>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Establish this peer as the default MSDP peer and accept source-active messages from the peer without the usual peer-reverse-path-forwarding (peer-RPF) check.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring MSDP with Active Source Limits and Mesh Groups on page 3773</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |



## disable (Protocols MSDP)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | disable;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <b>msdp</b>],<br/>[edit logical-systems <i>logical-system-name</i> protocols <b>msdp group</b> <i>group-name</i>],<br/>[edit logical-systems <i>logical-system-name</i> protocols <b>msdp group</b> <i>group-name</i> <b>peer</b> <i>address</i>],<br/>[edit logical-systems <i>logical-system-name</i> protocols <b>msdp peer</b> <i>address</i>],<br/>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>msdp</b>],<br/>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>msdp group</b> <i>group-name</i>],<br/>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>msdp group</b> <i>group-name</i> <b>peer</b> <i>address</i>],<br/>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>msdp peer</b> <i>address</i>],<br/>[edit protocols <b>msdp</b>],<br/>[edit protocols <b>msdp group</b> <i>group-name</i>],<br/>[edit protocols <b>msdp group</b> <i>group-name</i> <b>peer</b> <i>address</i>],<br/>[edit protocols <b>msdp peer</b> <i>address</i>],<br/>[edit routing-instances <i>routing-instance-name</i> protocols <b>msdp</b>],<br/>[edit routing-instances <i>routing-instance-name</i> protocols <b>msdp group</b> <i>group-name</i>],<br/>[edit routing-instances <i>routing-instance-name</i> protocols <b>msdp group</b> <i>group-name</i> <b>peer</b> <i>address</i>],<br/>[edit routing-instances <i>routing-instance-name</i> protocols <b>msdp peer</b> <i>address</i>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Explicitly disable MSDP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Disabling MSDP</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |



## export (Protocols MSDP)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>export [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">msdp</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">msdp group</a> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">msdp group</a> <i>group-name</i> <a href="#">peer</a> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">msdp peer</a> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp group</a> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp group</a> <i>group-name</i> <a href="#">peer</a> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp peer</a> <i>address</i>],</p> <p>[edit protocols <a href="#">msdp</a>],</p> <p>[edit protocols <a href="#">msdp group</a> <i>group-name</i>],</p> <p>[edit protocols <a href="#">msdp group</a> <i>group-name</i> <a href="#">peer</a> <i>address</i>],</p> <p>[edit protocols <a href="#">msdp peer</a> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp group</a> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp group</a> <i>group-name</i> <a href="#">peer</a> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp peer</a> <i>address</i>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Apply one or more policies to routes being exported from the routing table into MSDP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more policies.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Example: Configuring MSDP in a Routing Instance</li> <li><a href="#">import on page 3907</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



## group

```
Syntax  group group-name {
        disable;
        export [ policy-names ];
        import [ policy-names ];
        local-address address;
        mode (mesh-group | standard);
        traceoptions {
            file filename <files number> <size size> <world-readable | no-world-readable>;
            flag flag <flag-modifier> <disable>;
        }
        peer address; {
            disable;
            active-source-limit {
                maximum number;
                threshold number;
            }
            authentication-key peer-key;
            default-peer;
            export [ policy-names ];
            import [ policy-names ];
            local-address address;
            traceoptions {
                file filename <files number> <size size> <world-readable | no-world-readable>;
                flag flag <flag-modifier> <disable>;
            }
        }
    }
```

**Hierarchy Level** [edit logical-systems *logical-system-name* protocols [msdp](#)],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols  
[msdp](#)],  
 [edit protocols [msdp](#)],  
 [edit routing-instances *routing-instance-name* protocols [msdp](#)]

**Release Information** Statement introduced before Junos OS Release 7.4.  
 Statement introduced in Junos OS Release 12.1 for the QFX Series.

**Description** Define an MSDP peer group. MSDP peers within groups share common tracing options, if present and not overridden for an individual peer with the [peer](#) statement. To configure multiple MSDP groups, include multiple **group** statements.

By default, the group's options are identical to the global MSDP options. To override the global options, include group-specific options within the **group** statement.

The group must contain at least one peer.

**Options** *group-name*—Name of the MSDP group.

The remaining statements are explained separately.



**Required Privilege** routing—To view this statement in the configuration.  
**Level** routing-control—To add this statement to the configuration.

**Related Documentation**

- Example: Configuring MSDP in a Routing Instance

## import (Protocols MSDP)

**Syntax** `import [ policy-names ];`

**Hierarchy Level**

```
[edit logical-systems logical-system-name protocols msdp],
[edit logical-systems logical-system-name protocols msdp group group-name],
[edit logical-systems logical-system-name protocols msdp group group-name peer address],
[edit logical-systems logical-system-name protocols msdp peer address],
[edit logical-systems logical-system-name routing-instances routing-instance-name protocols msdp],
[edit logical-systems logical-system-name routing-instances routing-instance-name protocols msdp group group-name],
[edit logical-systems logical-system-name routing-instances routing-instance-name protocols msdp group group-name peer address],
[edit logical-systems logical-system-name routing-instances routing-instance-name protocols msdp peer address],
[edit protocols msdp],
[edit protocols msdp group group-name],
[edit protocols msdp group group-name peer address],
[edit protocols msdp peer address],
[edit routing-instances routing-instance-name protocols msdp],
[edit routing-instances routing-instance-name protocols msdp group group-name],
[edit routing-instances routing-instance-name protocols msdp group group-name peer address],
[edit routing-instances routing-instance-name protocols msdp peer address]
```

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 12.1 for the QFX Series.

**Description** Apply one or more policies to routes being imported into the routing table from MSDP.

**Options** *policy-names*—Name of one or more policies.

**Required Privilege** routing—To view this statement in the configuration.  
**Level** routing-control—To add this statement to the configuration.

**Related Documentation**

- Example: Configuring MSDP in a Routing Instance
- [export on page 3905](#)



## local-address

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>local-address address;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> protocols <b>msdp</b>],</code><br><code>[edit logical-systems <i>logical-system-name</i> protocols <b>msdp group</b> <i>group-name</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> protocols <b>msdp group</b> <i>group-name</i> <b>peer</b> <i>address</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> protocols <b>msdp peer</b> <i>address</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>msdp</b>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>msdp group</b> <i>group-name</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>msdp group</b> <i>group-name</i> <b>peer</b> <i>address</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>msdp peer</b> <i>address</i>],</code><br><code>[edit protocols <b>msdp</b>],</code><br><code>[edit protocols <b>msdp group</b> <i>group-name</i>],</code><br><code>[edit protocols <b>msdp group</b> <i>group-name</i> <b>peer</b> <i>address</i>],</code><br><code>[edit protocols <b>msdp peer</b> <i>address</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols <b>msdp</b>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols <b>msdp group</b> <i>group-name</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols <b>msdp group</b> <i>group-name</i> <b>peer</b> <i>address</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols <b>msdp peer</b> <i>address</i>]</code> |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | Configure the local end of an MSDP session. You must configure at least one peer for MSDP to function. When configuring a peer, you must include this statement. This address is used to accept incoming connections to the peer and to establish connections to the remote peer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <b>address</b> —IP address of the local end of the connection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Example: Configuring MSDP in a Routing Instance</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |



## maximum

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>maximum <i>number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">msdp active-source-limit</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp active-source-limit</a> ],<br>[edit protocols <a href="#">msdp active-source-limit</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp active-source-limit</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Configure the maximum number of MSDP active source messages the router accepts.                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <i>number</i> —Maximum number of active source messages.<br><b>Range:</b> 1 through 1,000,000<br><b>Default:</b> 25,000                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring MSDP with Active Source Limits and Mesh Groups on page 3773</a></li> <li>• <a href="#">threshold on page 3916</a></li> </ul>                                                                                                                                                                                                                                      |



## mode (Protocols MSDP)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | mode (mesh-group   standard);                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>msdp group</b> <i>group-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>msdp group</b> <i>group-name</i> ],<br>[edit protocols <b>msdp group</b> <i>group-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <b>msdp group</b> <i>group-name</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | Configure groups of peers in a full mesh topology to limit excessive flooding of source-active messages to neighboring peers. The default flooding mode is <b>standard</b> .                                                                                                                                                                                                                                            |
| <b>Default</b>                  | If you do not include this statement, default flooding is applied.                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <b>mesh-group</b> —Group of peers that are mesh group members.<br><br><b>standard</b> —Use standard MSDP source-active flooding rules.<br><b>Default:</b> standard                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring MSDP with Active Source Limits and Mesh Groups on page 3773</a></li></ul>                                                                                                                                                                                                                                                                      |



## msdp

```

Syntax  msdp {
        disable;
        active-source-limit {
            log-interval seconds;
            log-warning value;
            maximum number;
            threshold number;
        }
        data-encapsulation (disable | enable);
        export [ policy-names ];
        group group-name {
            ...group-configuration ...
        }
        hold-time seconds;
        import [ policy-names ];
        local-address address;
        keep-alive seconds;
        peer address {
            ...peer-configuration ...
        }
        rib-group group-name;
        source ip-prefix</prefix-length> {
            active-source-limit {
                maximum number;
                threshold number;
            }
        }
        sa-hold-time seconds;
        traceoptions {
            file filename <files number> <size size> <world-readable | no-world-readable>;
            flag flag <flag-modifier> <disable>;
        }
        group group-name {
            disable;
            export [ policy-names ];
            import [ policy-names ];
            local-address address;
            mode (mesh-group | standard);
            peer address {
                ... same statements as at the [edit protocols msdp peer address] hierarchy level shown
                just following ...
            }
            traceoptions {
                file filename <files number> <size size> <world-readable | no-world-readable>;
                flag flag <flag-modifier> <disable>;
            }
        }
        peer address {
            disable;
            active-source-limit {
                maximum number;
                threshold number;
            }
        }
    }

```



```
    }  
    authentication-key peer-key;  
    default-peer;  
    export [ policy-names ];  
    import [ policy-names ];  
    local-address address;  
    traceoptions {  
        file filename <files number> <size size> <world-readable | no-world-readable>;  
        flag flag <flag-modifier> <disable>;  
    }  
}  
}
```

|                                 |                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols],<br>[edit protocols],<br>[edit routing-instances <i>routing-instance-name</i> protocols] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.4 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                      |
| <b>Description</b>              | Enable MSDP on the router or switch. You must also configure at least one peer for MSDP to function.                                                                                                                                                                |
| <b>Default</b>                  | MSDP is disabled on the router or switch.                                                                                                                                                                                                                           |
| <b>Options</b>                  | The statements are explained separately.                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Example: Configuring MSDP in a Routing Instance</li></ul>                                                                                                                                                                     |



## peer (Protocols MSDP)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> peer address {     disable;     active-source-limit {         maximum number;         threshold number;     }     authentication-key peer-key;     default-peer;     export [ policy-names ];     import [ policy-names ];     local-address address;     traceoptions {         file filename &lt;files number&gt; &lt;size size&gt; &lt;world-readable   no-world-readable&gt;;         flag flag &lt;flag-modifier&gt; &lt;disable&gt;;     } } </pre>                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols <b>msdp</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols <b>msdp group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>msdp</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>msdp group</b> <i>group-name</i>],</p> <p>[edit protocols <b>msdp</b>],</p> <p>[edit protocols <b>msdp group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <b>msdp</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <b>msdp group</b> <i>group-name</i>]</p>               |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>         | <p>Define an MSDP peering relationship. An MSDP router must know which routers are its peers. You define the peer relationships explicitly by configuring the neighboring routers that are the MSDP peers of the local router. After peer relationships are established, the MSDP peers exchange messages to advertise active multicast sources. To configure multiple MSDP peers, include multiple <b>peer</b> statements.</p> <p>By default, the peer's options are identical to the global or group-level MSDP options. To override the global or group-level options, include peer-specific options within the <b>peer (Protocols MSDP)</b> statement.</p> <p>At least one peer must be configured for MSDP to function. You must configure <b>address</b> and <b>local-address</b>.</p> |
| <b>Options</b>             | <p><b>address</b>—Name of the MSDP peer.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege</b>  | routing—To view this statement in the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Level</b>               | routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



**Related Documentation** • Example: Configuring MSDP in a Routing Instance

---

## rib-group (Protocols MSDP)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>rib-group <i>group-name</i>;</code>                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">msdp</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp</a> ],<br>[edit protocols <a href="#">msdp</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                      |
| <b>Description</b>              | Associate a routing table group with MSDP.                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                  | <i>group-name</i> —Name of the routing table group. The name must be one that you defined with the <b>rib-groups</b> statement at the [edit routing-options] hierarchy level.                                                                                                                                                                               |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | • Example: Configuring MSDP in a Routing Instance                                                                                                                                                                                                                                                                                                           |



## source

|                                 |                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>source ip-address &lt;/prefix-length&gt; {     active-source-limit {         maximum number;         threshold number;     } }</pre>                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">msdp</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp</a>],</p> <p>[edit protocols <a href="#">msdp</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp</a>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                          |
| <b>Description</b>              | Limit the number of active source messages the routing device accepts from sources in this address range.                                                                                                                                                                                                                                                                  |
| <b>Default</b>                  | If you do not include this statement, the routing device accepts any number of MSDP active source messages.                                                                                                                                                                                                                                                                |
| <b>Options</b>                  | The other statements are explained separately.                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring MSDP with Active Source Limits and Mesh Groups on page 3773</a></li> </ul>                                                                                                                                                                                                                       |



## threshold

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>threshold <i>number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">msdp active-source-limit</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp active-source-limit</a> ],<br>[edit protocols <a href="#">msdp active-source-limit</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp active-source-limit</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Configure the random early detection (RED) threshold for MSDP active source messages. This number must be less than the configured or default maximum.                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <i>number</i> —RED threshold for active source messages.<br><b>Range:</b> 1 through 1,000,000<br><b>Default:</b> 24,000                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring MSDP with Active Source Limits and Mesh Groups on page 3773</a></li><li>• <a href="#">maximum on page 3909</a></li></ul>                                                                                                                                                                                                                                           |



## traceoptions (Protocols MSDP)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> traceoptions {     file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i> &lt;flag-modifier&gt; &lt;disable&gt;; } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">msdp</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">msdp group</a> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">msdp group</a> <i>group-name</i> <a href="#">peer</a> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">msdp peer</a> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp group</a> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp group</a> <i>group-name</i> <a href="#">peer</a> <i>address</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp peer</a> <i>address</i>],</p> <p>[edit protocols <a href="#">msdp</a>],</p> <p>[edit protocols <a href="#">msdp group</a> <i>group-name</i>],</p> <p>[edit protocols <a href="#">msdp group</a> <i>group-name</i> <a href="#">peer</a> <i>address</i>],</p> <p>[edit protocols <a href="#">msdp peer</a> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp group</a> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp group</a> <i>group-name</i> <a href="#">peer</a> <i>address</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">msdp peer</a> <i>address</i>]</p> |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>         | <p>Configure MSDP tracing options.</p> <p>To specify more than one tracing operation, include multiple <b>flag</b> statements.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Default</b>             | <p>The default MSDP trace options are those inherited from the routing protocol's <b>traceoptions</b> statement included at the [edit routing-options] hierarchy level.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>             | <p><b>disable</b>—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as <b>all</b>.</p> <p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory <b>/var/log</b>. We recommend that you place tracing output in the <b>msdp-log</b> file.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file named <b><i>trace-file</i></b> reaches its maximum size, it is renamed <b><i>trace-file.0</i></b>, then <b><i>trace-file.1</i></b>, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |



If you specify a maximum number of files, you must also include the **size** statement to specify the maximum file size.

**Range:** 2 through 1000 files

**Default:** 2 files

**flag *flag***—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements.

#### MSDP Tracing Flags

- **keepalive**—Keepalive messages
- **packets**—All MSDP packets
- **route**—MSDP changes to the routing table
- **source-active**—Source-active packets
- **source-active-request**—Source-active request packets
- **source-active-response**—Source-active response packets

#### Global Tracing Flags

- **all**—All tracing operations
- **general**—A combination of the **normal** and **route** trace operations
- **normal**—All normal operations

**Default:** If you do not specify this option, only unusual or abnormal operations are traced.

- **policy**—Policy operations and actions
- **route**—Routing table changes
- **state**—State transitions
- **task**—Interface transactions and processing
- **timer**—Timer usage

***flag-modifier***—(Optional) Modifier for the tracing flag. You can specify one or more of these modifiers:



- **detail**—Detailed trace information

- **receive**—Packets being received

- **send**—Packets being transmitted

**no-stamp**—(Optional) Do not place timestamp information at the beginning of each line in the trace file.

**Default:** If you omit this option, timestamp information is placed at the beginning of each line of the tracing output.

**no-world-readable**—(Optional) Do not allow any user to read the log file.

**replace**—(Optional) Replace an existing trace file if there is one.

**Default:** If you do not include this option, tracing output is appended to an existing trace file.

**size size**—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches this size, it is renamed **trace-file.0**. When **trace-file** again reaches this size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

If you specify a maximum file size, you must also include the **files** statement to specify the maximum number of trace files.

**Syntax:** **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

**Range:** 10 KB through the maximum file size supported on your system

**Default:** 1 MB

**world-readable**—(Optional) Allow any user to read the log file.

|                                 |                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing and trace—To view this statement in the configuration.<br>routing-control and trace-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Tracing MSDP Protocol Traffic on page 3769</a></li> </ul>                                  |



## Source-Specific Multicast Configuration Statements

---

### asm-override-ssm

---

|                                 |                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | asm-override-ssm;                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast],<br>[edit logical-systems <i>logical-system-name</i> routing-options multicast],<br>[edit routing-instances <i>routing-instance-name</i> routing-options multicast],<br>[edit routing-options multicast] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.4.<br>Statement introduced in Junos OS Release 9.5 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 12.3 for ACX Series routers.                                                                 |
| <b>Description</b>              | Enable the routing device to accept any-source multicast join messages (*;G) for group addresses that are within the default or configured range of source-specific multicast groups.                                                                                                                                               |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Source-Specific Multicast Groups with Any-Source Override on page 3788</a></li></ul>                                                                                                                                                                       |



## policy (SSM Maps)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>policy [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">ssm-map</a> <i>ssm-map-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <a href="#">ssm-map</a> <i>ssm-map-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">ssm-map</a> <i>ssm-map-name</i>],</p> <p>[edit routing-options multicast <a href="#">ssm-map</a> <i>ssm-map-name</i>]</p> |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>                                                                                                                                                                                                                                                 |
| <b>Description</b>              | Apply one or more policies to an SSM map.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more policies for SSM mapping.                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To view this statement in the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring SSM Mapping on page 3785</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                      |



## ssm-groups

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ssm-groups [ <i>ip-addresses</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-options multicast],</code><br><code>[edit routing-instances <i>routing-instance-name</i> routing-options multicast],</code><br><code>[edit routing-options multicast]</code>                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 12.3 for ACX Series routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | <p>Configure source-specific multicast (SSM) groups.</p> <p>By default, the SSM group multicast address is limited to the IP address range from 232.0.0.0 through 232.255.255.255. However, you can extend SSM operations into another Class D range by including the <b>ssm-groups</b> statement in the configuration. The default SSM address range from 232.0.0.0 through 232.255.255.255 cannot be used in the <b>ssm-groups</b> statement. This statement is for adding other multicast addresses to the default SSM group addresses. This statement does not override the default SSM group address range.</p> <p>IGMPv3 supports SSM groups. By utilizing inclusion lists, only sources that are specified send to the SSM group.</p> |
| <b>Options</b>                  | <i>ip-addresses</i> —List of one or more additional SSM group addresses separated by a space.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | <code>routing</code> —To view this statement in the configuration.<br><code>routing-control</code> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Source-Specific Multicast Groups with Any-Source Override on page 3788</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |



## ssm-map (Protocols IGMP)

|                                 |                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ssm-map <i>ssm-map-name</i>;</code>                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <b>igmp</b> interface <i>interface-name</i> ],<br>[edit protocols <b>igmp</b> interface <i>interface-name</i> ]                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series. |
| <b>Description</b>              | Apply an SSM map to an IGMP interface.                                                                                                                                                     |
| <b>Options</b>                  | <i>ssm-map-name</i> —Name of SSM map.                                                                                                                                                      |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring SSM Mapping on page 3785</a></li> </ul>                                                                          |

## ssm-map (Routing Options Multicast)

|                                 |                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ssm-map <i>ssm-map-name</i> {<br/>    <b>policy</b> [ <i>policy-names</i> ];<br/>    source [ <i>addresses</i> ];<br/>}</code>                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast],<br>[edit logical-systems <i>logical-system-name</i> routing-options multicast],<br>[edit routing-instances <i>routing-instance-name</i> routing-options multicast],<br>[edit routing-options multicast] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 12.3 for ACX Series routers.                                                                 |
| <b>Description</b>              | Configure SSM mapping.                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <i>ssm-map-name</i> —Name of the SSM map.<br><br>The remaining statements are explained separately.                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring SSM Mapping on page 3785</a></li> </ul>                                                                                                                                                                                                                   |



## ssm-map-policy (IGMP)

---

|                                 |                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ssm-map-policy <i>ssm-map-policy-name</i>;</code>                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">igmp interface interface-name</a> ],<br>[edit protocols <a href="#">igmp interface interface-name</a> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.4.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                            |
| <b>Description</b>              | Apply an SSM map policy to an IGMP interface.                                                                                                                                  |
| <b>Options</b>                  | <i>ssm-map-policy-name</i> —Name of SSM map policy.                                                                                                                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring SSM Maps for Different Groups to Different Sources on page 3791</a></li></ul>                         |



# Administration

- [Routine Monitoring on page 3925](#)
- [Monitoring Commands for Multicast Protocols on page 3926](#)

## Routine Monitoring

- [Monitoring IGMP Snooping on page 3925](#)
- [Verifying the IGMP Snooping Group Timeout Value on page 3926](#)

## Monitoring IGMP Snooping

- Purpose** Use the monitoring feature to view status and information about the IGMP snooping configuration.
- Action** To display IGMP snooping details in the CLI, enter the following commands:
  - `show igmp-snooping vlans`
  - `show igmp-snooping statistics`
  - `show igmp-snooping route`
  - `show igmp-snooping membership`
- Meaning** [Table 243 on page 3925](#) summarizes the IGMP snooping details displayed.

Table 243: Summary of IGMP Snooping Output Fields

| Field                 | Values                                              |
|-----------------------|-----------------------------------------------------|
| IGMP Snooping Monitor |                                                     |
| VLAN                  | VLAN for which IGMP snooping is enabled.            |
| Interfaces            | Interface connected to a multicast router.          |
| Groups                | Number of the multicast groups learned by the VLAN. |
| MRouters              | Multicast router.                                   |
| Receivers             | Multicast receiver.                                 |



Table 243: Summary of IGMP Snooping Output Fields (*continued*)

| Field                  | Values                                                             |
|------------------------|--------------------------------------------------------------------|
| IGMP Route Information |                                                                    |
| VLAN                   | VLAN for which IGMP snooping is enabled.                           |
| Next-Hop               | Next hop assigned by the switch after performing the route lookup. |
| Group                  | Multicast groups learned by the VLAN.                              |

- Related Documentation**
- [IGMP Snooping Overview on page 3674](#)
  - [Example: Configuring IGMP Snooping on page 3759](#)
  - [Configuring IGMP Snooping on page 3758](#)
  - [Changing the IGMP Snooping Group Timeout Value on page 3759](#)

## Verifying the IGMP Snooping Group Timeout Value

**Purpose** Verify that the IGMP snooping group timeout value has been changed correctly from its default value.

**Action** Display the IGMP snooping membership information, which contains the group timeout value that was derived from the IGMP configuration:

```
user@switch> show igmp-snooping membership detail
VLAN: v43 Tag: 43 (Index: 4)
Group: 225.0.0.1
Receiver count: 1, Flags: <v2-hosts>
ge-0/0/15.0 Uptime: 00:00:05 timeout: 510
```

**Meaning** The IGMP snooping group timeout value determines how long a switch waits to receive an IGMP query from a multicast router before removing a multicast group from its multicast cache table. When you enable IGMP snooping, the default IGMP snooping group timeout value of 260 seconds is applied to all VLANs, which means that the switch waits 260 seconds to receive an IGMP query before removing a multicast group from its multicast cache table. You can change the timeout value by using the **robust-count** option.

- Related Documentation**
- [Changing the IGMP Snooping Group Timeout Value on page 3759](#)

## Monitoring Commands for Multicast Protocols



## clear igmp membership

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | clear igmp membership<br><group <i>address-range</i> ><br><interface <i>interface-name</i> ><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | clear igmp membership<br><group <i>address-range</i> ><br><interface <i>interface-name</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>                                  | Clear Internet Group Management Protocol (IGMP) group members.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Options</b>                                      | <p><b>none</b>—Clear all IGMP members on all interfaces and for all address ranges.</p> <p><b>group <i>address-range</i></b>—(Optional) Clear all IGMP members that are in a particular address range. An example of a range is <b>224.2/16</b>. If you omit the destination prefix length, the default is <b>/32</b>.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Clear all IGMP group members on an interface.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                     | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>                        | <ul style="list-style-type: none"> <li>• <a href="#">show igmp group on page 3960</a></li> <li>• <a href="#">show igmp interface on page 3964</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>List of Sample Output</b>                        | <a href="#">clear igmp membership on page 3928</a><br><a href="#">clear igmp membership interface on page 3928</a><br><a href="#">clear igmp membership group on page 3929</a>                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Output Fields</b>                                | See <a href="#">show igmp group</a> for an explanation of output fields.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |



## Sample Output

### clear igmp membership

The following sample output displays IGMP group information before and after the **clear igmp membership** command is entered:

```
user@host> show igmp group
Interface      Group          Last Reported  Timeout
so-0/0/0       224.2.127.253  10.1.128.1     186
so-0/0/0       224.2.127.254  10.1.128.1     186
so-0/0/0       239.255.255.255 10.1.128.1     187
so-0/0/0       224.1.127.255   10.1.128.1     188
local         224.0.0.6       (null)         0
local         224.0.0.5       (null)         0
local         224.2.127.254   (null)         0
local         239.255.255.255 (null)         0
local         224.0.0.2       (null)         0
local         224.0.0.13      (null)         0
```

```
user@host> clear igmp membership
Clearing Group Membership Info for so-0/0/0
Clearing Group Membership Info for so-1/0/0
Clearing Group Membership Info for so-2/0/0
```

```
user@host> show igmp group
Interface      Group          Last Reported  Timeout
local         224.0.0.6       (null)         0
local         224.0.0.5       (null)         0
local         224.2.127.254   (null)         0
local         239.255.255.255 (null)         0
local         224.0.0.2       (null)         0
local         224.0.0.13      (null)         0
```

### clear igmp membership interface

The following sample output displays IGMP group information before and after the **clear igmp membership interface** command is issued:

```
user@host> show igmp group
Interface      Group          Last Reported  Timeout
so-0/0/0       224.2.127.253  10.1.128.1     210
so-0/0/0       239.255.255.255 10.1.128.1     210
so-0/0/0       224.1.127.255   10.1.128.1     215
so-0/0/0       224.2.127.254   10.1.128.1     216
local         224.0.0.6       (null)         0
local         224.0.0.5       (null)         0
local         224.2.127.254   (null)         0
local         239.255.255.255 (null)         0
local         224.0.0.2       (null)         0
local         224.0.0.13      (null)         0
```

```
user@host> clear igmp membership interface so-0/0/0
Clearing Group Membership Info for so-0/0/0
```

```
user@host> show igmp group
Interface      Group          Last Reported  Timeout
local         224.0.0.6       (null)         0
local         224.0.0.5       (null)         0
local         224.2.127.254   (null)         0
```



|       |                 |        |   |
|-------|-----------------|--------|---|
| local | 239.255.255.255 | (null) | 0 |
| local | 224.0.0.2       | (null) | 0 |
| local | 224.0.0.13      | (null) | 0 |

### clear igmp membership group

The following sample output displays IGMP group information before and after the **clear igmp membership group** command is entered:

```
user@host> show igmp group
Interface      Group          Last Reported  Timeout
so-0/0/0       224.2.127.253  10.1.128.1     210
so-0/0/0       239.255.255.255 10.1.128.1     210
so-0/0/0       224.1.127.255   10.1.128.1     215
so-0/0/0       224.2.127.254   10.1.128.1     216
local          224.0.0.6       (null)         0
local          224.0.0.5       (null)         0
local          224.2.127.254   (null)         0
local          239.255.255.255 (null)         0
local          224.0.0.2       (null)         0
local          224.0.0.13      (null)         0
```

```
user@host> clear igmp membership group 239.225/16
Clearing Group Membership Range 239.225.0.0/16 on so-0/0/0
Clearing Group Membership Range 239.225.0.0/16 on so-1/0/0
Clearing Group Membership Range 239.225.0.0/16 on so-2/0/0
```

```
user@host> show igmp group
Interface      Group          Last Reported  Timeout
so-0/0/0       224.1.127.255   10.1.128.1     231
so-0/0/0       224.2.127.254   10.1.128.1     233
so-0/0/0       224.2.127.253   10.1.128.1     236
local          224.0.0.6       (null)         0
local          224.0.0.5       (null)         0
local          224.2.127.254   (null)         0
local          239.255.255.255 (null)         0
local          224.0.0.2       (null)         0
local          224.0.0.13      (null)         0
```



## clear igmp-snooping membership

---

|                                 |                                                                                                              |
|---------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>clear igmp-snooping membership</code><br><code>&lt;vlan <i>vlan-name</i>&gt;</code>                    |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                              |
| <b>Description</b>              | Clear IGMP snooping membership information.                                                                  |
| <b>Options</b>                  | <code>vlan <i>vlan-name</i></code> —(Optional) Name of the VLAN.                                             |
| <b>Required Privilege Level</b> | view                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show igmp-snooping membership on page 3971</a></li></ul> |
| <b>List of Sample Output</b>    | <a href="#">clear igmp-snooping membership on page 3930</a>                                                  |

### Sample Output

|                                             |                                                                                |
|---------------------------------------------|--------------------------------------------------------------------------------|
| <code>clear igmp-snooping membership</code> | <code>user@switch&gt; clear igmp-snooping membership vlan employee-vlan</code> |
|---------------------------------------------|--------------------------------------------------------------------------------|



## clear igmp statistics

---

|                                    |                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | clear igmp statistics<br><interface <i>interface-name</i> ><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                      |
| <b>Syntax (EX Series Switches)</b> | clear igmp statistics<br><interface <i>interface-name</i> >                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                 |
| <b>Description</b>                 | Clear Internet Group Management Protocol (IGMP) statistics.                                                                                                                                                                                                                                                                              |
| <b>Options</b>                     | <p><b>none</b>—Clear IGMP statistics on all interfaces.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Clear IGMP statistics for the specified interface only.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>    | clear                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>       | <ul style="list-style-type: none"> <li>• <a href="#">show igmp statistics on page 3968</a></li> </ul>                                                                                                                                                                                                                                    |
| <b>List of Sample Output</b>       | <a href="#">clear igmp statistics on page 3932</a>                                                                                                                                                                                                                                                                                       |
| <b>Output Fields</b>               | See <a href="#">show igmp statistics</a> for an explanation of output fields.                                                                                                                                                                                                                                                            |



## Sample Output

### clear igmp statistics

The following sample output displays IGMP statistics information before and after the **clear igmp statistics** command is entered:

```

user@host> show igmp statistics
IGMP packet statistics for all interfaces
IGMP Message type      Received      Sent  Rx errors
Membership Query        8883         459      0
V1 Membership Report    0            0        0
DVMRP                   19784        35476    0
PIM V1                  18310        0        0
Cisco Trace             0            0        0
V2 Membership Report    0            0        0
Group Leave             0            0        0
Mtrace Response         0            0        0
Mtrace Request          0            0        0
Domain Wide Report      0            0        0
V3 Membership Report    0            0        0
Other Unknown types     0            0        0
IGMP v3 unsupported type 0            0        0
IGMP v3 source required for SSM 0            0
IGMP v3 mode not applicable for SSM 0

IGMP Global Statistics
Bad Length              0
Bad Checksum            0
Bad Receive If          0
Rx non-local            1227

user@host> clear igmp statistics
user@host> show igmp statistics
IGMP packet statistics for all interfaces
IGMP Message type      Received      Sent  Rx errors
Membership Query        0            0      0
V1 Membership Report    0            0      0
DVMRP                   0            0      0
PIM V1                  0            0      0
Cisco Trace             0            0      0
V2 Membership Report    0            0      0
Group Leave             0            0      0
Mtrace Response         0            0      0
Mtrace Request          0            0      0
Domain Wide Report      0            0      0
V3 Membership Report    0            0      0
Other Unknown types     0            0      0
IGMP v3 unsupported type 0            0      0
IGMP v3 source required for SSM 0            0
IGMP v3 mode not applicable for SSM 0

IGMP Global Statistics
Bad Length              0
Bad Checksum            0
Bad Receive If          0
Rx non-local            0

```



---

## clear igmp-snooping statistics

---

|                                 |                                                                                                              |
|---------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear igmp-snooping statistics                                                                               |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                              |
| <b>Description</b>              | Clear IGMP snooping statistics.                                                                              |
| <b>Required Privilege Level</b> | view                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show igmp-snooping statistics on page 3976</a></li></ul> |
| <b>List of Sample Output</b>    | <a href="#">clear igmp-snooping statistics on page 3933</a>                                                  |

### Sample Output

|                                |                                             |
|--------------------------------|---------------------------------------------|
| clear igmp-snooping statistics | user@switch> clear igmp-snooping statistics |
|--------------------------------|---------------------------------------------|



## clear msdp cache

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>clear msdp cache</code><br><code>&lt;instance <i>instance-name</i>&gt;</code><br><code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code><br><code>&lt;peer <i>peer-address</i>&gt;</code>                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | Clear the entries in the Multicast Source Discovery Protocol (MSDP) source-active cache.                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <b>none</b> —Clear entries in the MSDP source-active cache for all instances, logical systems, and peers.<br><br><b>instance <i>instance-name</i></b> —(Optional) Clear entries for a specific MSDP instance.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.<br><br><b>peer <i>peer-address</i></b> —(Optional) Clear the MSDP source-active cache entries learned from a specific peer. |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show msdp source-active on page 3984</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>List of Sample Output</b>    | <a href="#">clear msdp cache on page 3934</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                                                                                                                                  |

## Sample Output

`clear msdp cache`      `user@host> clear msdp cache`



## clear msdp statistics

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear msdp statistics<br><instance <i>instance-name</i> ><br><logical-system (all   <i>logical-system-name</i> )><br><peer <i>peer-address</i> >                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | Clear Multicast Source Discovery Protocol (MSDP) peer statistics.                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <p><b>none</b>—Clear MSDP statistics for all peers.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Clear statistics for the specified instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>peer <i>peer-address</i></b>—(Optional) Clear the statistics for the specified peer.</p> |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show msdp statistics on page 3987</a></li> </ul>                                                                                                                                                                                                                                                                                                                  |
| <b>List of Sample Output</b>    | <a href="#">clear msdp statistics on page 3935</a>                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                                                  |

## Sample Output

**clear msdp statistics**      user@host> clear msdp statistics



## clear multicast bandwidth-admission

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>clear multicast bandwidth-admission &lt;group <i>group-address</i>&gt; &lt;inet   inet6&gt; &lt;instance <i>instance-name</i>&gt; &lt;interface <i>interface-name</i>&gt; &lt;source <i>source-address</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | <p>Command introduced in Junos OS Release 8.3.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>inet6</b> and <b>instance</b> options introduced in Junos OS Release 10.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Reapply IP multicast bandwidth admissions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b>none</b>—Reapply multicast bandwidth admissions for all IPv4 forwarding entries in the master routing instance.</p> <p><b>group <i>group-address</i></b>—(Optional) Reapply multicast bandwidth admissions for the specified group.</p> <p><b>inet</b>—(Optional) Reapply multicast bandwidth admission settings for IPv4 flows.</p> <p><b>inet6</b>—(Optional) Reapply multicast bandwidth admission settings for IPv6 flows.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Reapply multicast bandwidth admission settings for the specified instance. If you do not specify an instance, the command applies to the master routing instance.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Examines the corresponding outbound interface in the relevant entries and acts as follows:</p> <ul style="list-style-type: none"><li>• If the interface is congested, and it was admitted previously, it is removed.</li><li>• If the interface was rejected previously, the <b>clear multicast bandwidth-admission</b> command enables the interface to be admitted as long as enough bandwidth exists on the interface.</li><li>• If you do not specify an interface, issuing the <b>clear multicast bandwidth-admission</b> command readmits any previously rejected interface for the relevant entries as long as enough bandwidth exists on the interface.</li></ul> <p>To manually reject previously admitted outbound interfaces, you must specify the interface.</p> <p><b>source <i>source-address</i></b>—(Optional) Use with the <b>group</b> option to reapply multicast bandwidth admission settings for the specified (source, group) entry.</p> |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



**Related Documentation** • [show multicast interface on page 3993](#)

**List of Sample Output** [clear multicast bandwidth-admission on page 3937](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request.

## Sample Output

`clear multicast  
bandwidth-admission`      `user@host> clear multicast bandwidth-admission`



## clear multicast scope

---

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | <code>clear multicast scope</code><br><code>&lt;inet   inet6&gt;</code><br><code>&lt;interface <i>interface-name</i>&gt;</code><br><code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>                                                                                                                                                                                                                                                                                                                                                   |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | <code>clear multicast scope</code><br><code>&lt;inet   inet6&gt;</code><br><code>&lt;interface <i>interface-name</i>&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>                          | Command introduced in Junos OS Release 7.6.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>inet6</b> option introduced in Junos OS Release 10.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                     |
| <b>Description</b>                                  | Clear IP multicast scope statistics.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                                      | <b>none</b> —(Same as <b>logical-system all</b> ) Clear multicast scope statistics.<br><br><b>inet</b> —(Optional) Clear multicast scope statistics for IPv4 family addresses.<br><br><b>inet6</b> —(Optional) Clear multicast scope statistics for IPv6 family addresses.<br><br><b>interface <i>interface-name</i></b> —(Optional) Clear multicast scope statistics on a specific interface.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| <b>Required Privilege Level</b>                     | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>                        | <ul style="list-style-type: none"><li>• <a href="#">show multicast scope on page 4014</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>List of Sample Output</b>                        | <a href="#">clear multicast scope on page 3938</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Output Fields</b>                                | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## Sample Output

**clear multicast scope**      user@host> clear multicast scope



## clear multicast sessions

|                                                     |                                                                                                                                                                                                                                                                                                                                                                              |
|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | clear multicast sessions<br><logical-system (all   <i>logical-system-name</i> )><br>< <i>regular-expression</i> >                                                                                                                                                                                                                                                            |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | clear multicast sessions<br>< <i>regular-expression</i> >                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                     |
| <b>Description</b>                                  | Clear IP multicast sessions.                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                                      | <p><b>none</b>—(Same as <b>logical-system all</b>) Clear multicast sessions.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b><i>regular-expression</i></b>—(Optional) Clear only multicast sessions that contain the specified regular expression.</p> |
| <b>Required Privilege Level</b>                     | clear                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>                        | <ul style="list-style-type: none"> <li>• <a href="#">show multicast sessions on page 4016</a></li> </ul>                                                                                                                                                                                                                                                                     |
| <b>List of Sample Output</b>                        | <a href="#">clear multicast sessions on page 3939</a>                                                                                                                                                                                                                                                                                                                        |
| <b>Output Fields</b>                                | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                        |

## Sample Output

```
clear multicast sessions      user@host> clear multicast sessions
```



## clear multicast statistics

---

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | clear multicast statistics<br><inet   inet6><br><instance <i>instance-name</i> ><br><interface <i>interface-name</i> ><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | clear multicast statistics<br><inet   inet6><br><instance <i>instance-name</i> ><br><interface <i>interface-name</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>inet6</b> and <b>instance</b> options introduced in Junos OS Release 10.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>                                  | Clear IP multicast statistics.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>                                      | <b>none</b> —Clear multicast statistics for all supported address families on all interfaces.<br><br><b>inet</b> —(Optional) Clear multicast statistics for IPv4 family addresses.<br><br><b>inet6</b> —(Optional) Clear multicast statistics for IPv6 family addresses.<br><br><b>instance <i>instance-name</i></b> —(Optional) Clear multicast statistics for the specified instance.<br><br><b>interface <i>interface-name</i></b> —(Optional) Clear multicast statistics on a specific interface.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| <b>Required Privilege Level</b>                     | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>                        | <ul style="list-style-type: none"><li>• show multicast statistics</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>List of Sample Output</b>                        | <a href="#">clear multicast statistics on page 3940</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Output Fields</b>                                | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

## Sample Output

|                            |                                       |
|----------------------------|---------------------------------------|
| clear multicast statistics | user@host> clear multicast statistics |
|----------------------------|---------------------------------------|



## clear pim join

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | clear pim join<br><group-address><br><inet   inet6><br><instance instance-name><br><logical-system (all   logical-system-name)>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | clear pim join<br><group-address><br><inet   inet6><br><instance instance-name>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>inet6</b> and <b>instance</b> options introduced in Junos OS Release 10.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>                                  | Clear the Protocol Independent Multicast (PIM) join and prune states.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Options</b>                                      | <p><b>none</b>—Clear the PIM join and prune states for all groups, family addresses, and instances.</p> <p><b>group-address</b>—(Optional) Clear the PIM join and prune states for a group address.</p> <p><b>inet   inet6</b>—(Optional) Clear the PIM join and prune states for IPv4 or IPv6 family addresses, respectively.</p> <p><b>instance instance-name</b>—(Optional) Clear the join and prune states for a specific PIM-enabled routing instance.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Additional Information</b>                       | The <b>clear pim join</b> command cannot be used to clear the PIM join and prune state on a backup Routing Engine when nonstop active routing is enabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b>                     | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>                        | <ul style="list-style-type: none"> <li>• <a href="#">show pim join on page 4027</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>List of Sample Output</b>                        | <a href="#">clear pim join on page 3941</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Output Fields</b>                                | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

## Sample Output

**clear pim join**                      user@host> clear pim join



## clear pim register

---

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | clear pim register<br><inet   inet6><br><instance <i>instance-name</i> ><br><interface <i>interface-name</i> ><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | clear pim register<br><inet   inet6><br><instance <i>instance-name</i> ><br><interface <i>interface-name</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Syntax (PTX Series)</b>                          | clear pim register<br><inet   inet6><br><instance <i>instance-name</i> ><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>                          | Command introduced in Junos OS Release 7.6.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>inet6</b> and <b>instance</b> options introduced in Junos OS Release 10.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>                                  | Clear Protocol Independent Multicast (PIM) register message counters.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                                      | <p>none—Clear PIM register message counters for all family addresses, instances, and interfaces.</p> <p><b>inet   inet6</b>—(Optional) Clear PIM register message counters for IPv4 or IPv6 family addresses, respectively.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Clear register message counters for a specific PIM-enabled routing instance.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Clear PIM register message counters for a specific interface.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Additional Information</b>                       | The <b>clear pim register</b> command cannot be used to clear the PIM register state on a backup Routing Engine when nonstop active routing is enabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b>                     | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>                        | <ul style="list-style-type: none"><li>• <a href="#">show pim statistics on page 4050</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>List of Sample Output</b>                        | <a href="#">clear pim register on page 3943</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Output Fields</b>                                | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



## Sample Output

```
clear pim register      user@host> clear pim register
```



## clear pim statistics

---

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | clear pim statistics<br><inet   inet6><br><instance <i>instance-name</i> ><br><interface <i>interface-name</i> ><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | clear pim statistics<br><inet   inet6><br><instance <i>instance-name</i> ><br><interface <i>interface-name</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>inet6</b> and <b>instance</b> options introduced in Junos OS Release 10.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                |
| <b>Description</b>                                  | Clear Protocol Independent Multicast (PIM) statistics.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                                      | <b>none</b> —Clear PIM statistics for all family addresses, instances, and interfaces.<br><br><b>inet   inet6</b> —(Optional) Clear PIM statistics for IPv4 or IPv6 family addresses, respectively.<br><br><b>instance <i>instance-name</i></b> —(Optional) Clear statistics for a specific PIM-enabled routing instance.<br><br><b>interface <i>interface-name</i></b> —(Optional) Clear PIM statistics for a specific interface.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| <b>Additional Information</b>                       | The <b>clear pim statistics</b> command cannot be used to clear the PIM statistics on a backup Routing Engine when nonstop active routing is enabled.                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b>                     | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>                        | <ul style="list-style-type: none"><li>• <a href="#">show pim statistics on page 4050</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>List of Sample Output</b>                        | <a href="#">clear pim statistics on page 3945</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Output Fields</b>                                | See <a href="#">show pim statistics</a> for an explanation of output fields.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |



## Sample Output

### clear pim statistics

The following sample output displays PIM statistics before and after the **clear pim statistics** command is entered:

```

user@host> show pim statistics
PIM statistics on all interfaces:
PIM Message type      Received      Sent  Rx errors
Hello                  0             0      0
Register               0             0      0
Register Stop          0             0      0
Join Prune             0             0      0
Bootstrap              0             0      0
Assert                 0             0      0
Graft                  0             0      0
Graft Ack              0             0      0
Candidate RP           0             0      0
V1 Query               2111          4222      0
V1 Register            0             0      0
V1 Register Stop       0             0      0
V1 Join Prune          14200         13115      0
V1 RP Reachability     0             0      0
V1 Assert              0             0      0
V1 Graft               0             0      0
V1 Graft Ack           0             0      0
PIM statistics summary for all interfaces:
Unknown type           0
V1 Unknown type        0
Unknown Version        0
Neighbor unknown      0
Bad Length             0
Bad Checksum           0
Bad Receive If         0
Rx Intf disabled       2007
Rx V1 Require V2       0
Rx Register not RP     0
RP Filtered Source     0
Unknown Reg Stop       0
Rx Join/Prune no state 1040
Rx Graft/Graft Ack no state 0
...

user@host> clear pim statistics
user@host> show pim statistics
PIM statistics on all interfaces:
PIM Message type      Received      Sent  Rx errors
Hello                  0             0      0
Register               0             0      0
Register Stop          0             0      0
Join Prune             0             0      0
Bootstrap              0             0      0
Assert                 0             0      0
Graft                  0             0      0
Graft Ack              0             0      0
Candidate RP           0             0      0
V1 Query               1             0      0
V1 Register            0             0      0
...
```







## mtrace

|                                 |                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>mtrace source</code><br><logical-system <i>logical-system-name</i> ><br><routing-instance <i>routing-instance-name</i> >                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 9.5 for SRX1400, SRX3400, SRX3600, SRX5600, and SRX5800 devices.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.<br>Command introduced in Junos OS Release 12.3 for the PTX Series. |
| <b>Description</b>              | Display trace information about an IP multicast path.                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                  | <i>source</i> —Source hostname or address.<br><br><i>logical-system (logical-system-name)</i> —(Optional) Perform this operation on a logical system.<br><br><i>routing-instance routing-instance-name</i> —(Optional) Trace a particular routing instance.                                                                                                            |
| <b>Additional Information</b>   | The <b>mtrace</b> command for multicast traffic is similar to the <b>traceroute</b> command used for unicast traffic. Unlike <b>traceroute</b> , <b>mtrace</b> traces traffic backwards, from the receiver to the source.                                                                                                                                              |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                   |
| <b>List of Sample Output</b>    | <a href="#">mtrace source on page 3949</a>                                                                                                                                                                                                                                                                                                                             |
| <b>Output Fields</b>            | <a href="#">Table 244 on page 3947</a> describes the output fields for the <b>mtrace</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                              |

**Table 244: mtrace Output Fields**

| Field Name                        | Field Description                                             |
|-----------------------------------|---------------------------------------------------------------|
| <b>Mtrace from</b>                | IP address of the receiver.                                   |
| <b>to</b>                         | IP address of the source.                                     |
| <b>via group</b>                  | IP address of the multicast group (if any).                   |
| <b>Querying full reverse path</b> | Indicates the full reverse path query has begun.              |
| <i>number-of-hops</i>             | Number of hops from the source to the named router or switch. |
| <i>router-name</i>                | Name of the router or switch for this hop.                    |
| <i>address</i>                    | Address of the router or switch for this hop.                 |



Table 244: mtrace Output Fields (*continued*)

| Field Name      | Field Description                              |
|-----------------|------------------------------------------------|
| <i>protocol</i> | Protocol used (for example, PIM).              |
| Round trip time | Average round-trip time, in milliseconds (ms). |
| total ttl of    | Time-to-live (TTL) threshold.                  |



## Sample Output

### mtrace source

```
user@host> mtrace 192.1.4.2
Mtrace from 192.1.4.2 to 192.1.1.2 via group 0.0.0.0
Querying full reverse path... * *
  0  routerA.lab.mycompany.net (192.1.1.2)
 -1  routerB.lab.mycompany.net (192.1.2.2) PIM thresh^ 1
 -2  routerC.lab.mycompany.net (192.1.3.2) PIM thresh^ 1
 -3  hostA.lab.mycompany.net (192.1.4.2)
Round trip time 2 ms; total ttl of 2 required.
```



## mtrace from-source

---

**Syntax**    `mtrace from-source source source`  
              `<brief | detail>`  
              `<extra-hops extra-hops>`  
              `<group group>`  
              `<interval interval>`  
              `<loop>`  
              `<max-hops max-hops>`  
              `<max-queries max-queries>`  
              `<multicast-response | unicast-response>`  
              `<no-resolve>`  
              `<no-router-alert>`  
              `<response response>`  
              `<routing-instance routing-instance-name>`  
              `<ttl tll>`  
              `<wait-time wait-time>`

**Release Information**    Command introduced before Junos OS Release 7.4.  
                              Command introduced in Junos OS Release 9.0 for EX Series switches.  
                              Command introduced in Junos OS Release 11.3 for the QFX Series.

**Description**    Display trace information about an IP multicast path from a source to this router or switch. If you specify a group address with this command, Junos OS returns additional information, such as packet rates and losses.

**Options**    **brief | detail**—(Optional) Display the specified level of output.

**extra-hops *extra-hops***—(Optional) Number of hops to take after reaching a nonresponsive router. You can specify a number between **0** and **255**.

**group *group***—(Optional) Group address for which to trace the path. The default group address is **0.0.0.0**.

**interval *interval***—(Optional) Number of seconds to wait before gathering statistics again. The default value is **10** seconds.

**loop**—(Optional) Loop indefinitely, displaying rate and loss statistics.

**max-hops *max-hops***—(Optional) Maximum hops to trace toward the source. The range of values is **0** through **255**. The default value is **32** hops.

**max-queries *max-queries***—(Optional) Maximum number of query attempts for any hop. The range of values is 1 through **32**. The default is **3**.

**multicast-response**—(Optional) Always request the response using multicast.

**no-resolve**—(Optional) Do not attempt to display addresses symbolically.

**no-router-alert**—(Optional) Do not use the router-alert IP option.

**response *response***—(Optional) Send trace response to a host or multicast address.



**routing-instance** *routing-instance-name*—(Optional) Trace a particular routing instance.

**source** *source*—Source hostname or address.

**ttl** *tll*—(Optional) IP time-to-live (TTL) value. You can specify a number between 0 and 255. Local queries to the multicast group use a value of 1. Otherwise, the default value is 127.

**unicast-response**—(Optional) Always request the response using unicast.

**wait-time** *wait-time*—(Optional) Number of seconds to wait for a response. The default value is 3.

**Required Privilege Level** view

**List of Sample Output** [mtrace from-source on page 3952](#)

**Output Fields** [Table 245 on page 3951](#) describes the output fields for the **mtrace from-source** command. Output fields are listed in the approximate order in which they appear.

**Table 245: mtrace from-source Output Fields**

| Field Name                        | Field Description                                             |
|-----------------------------------|---------------------------------------------------------------|
| <b>Mtrace from</b>                | IP address of the receiver.                                   |
| <b>to</b>                         | IP address of the source.                                     |
| <b>via group</b>                  | IP address of the multicast group (if any).                   |
| <b>Querying full reverse path</b> | Indicates the full reverse path query has begun.              |
| <b>number-of-hops</b>             | Number of hops from the source to the named router or switch. |
| <b>router-name</b>                | Name of the router or switch for this hop.                    |
| <b>address</b>                    | Address of the router or switch for this hop.                 |
| <b>protocol</b>                   | Protocol used (for example, PIM).                             |
| <b>Round trip time</b>            | Average round-trip time, in milliseconds (ms).                |
| <b>total ttl of</b>               | Time-to-live (TTL) threshold.                                 |
| <b>source</b>                     | Source address.                                               |
| <b>Response Dest</b>              | Response destination address.                                 |
| <b>Overall</b>                    | Average packet rate for all traffic at each hop.              |



Table 245: mtrace from-source Output Fields (*continued*)

| Field Name                                | Field Description                                                                                                |
|-------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <b>Packet Statistics for Traffic From</b> | Number of packets lost, number of packets sent, percentage of packets lost, and average packet rate at each hop. |
| <b>Receiver</b>                           | IP address receiving the multicast.                                                                              |
| <b>Query source</b>                       | IP address sending the mtrace query.                                                                             |

## Sample Output

### mtrace from-source

```

user@host> mtrace from-source source 192.1.4.2 group 225.1.1.1
Mtrace from 192.1.4.2 to 192.1.1.2 via group 225.1.1.1
Querying full reverse path... * *
  0 routerA.lab.mycompany.net (192.1.1.2)
 -1 routerB.lab.mycompany.net (192.1.2.2) PIM thresh^ 1
 -2 routerC.lab.mycompany.net (192.1.3.2) PIM thresh^ 1
 -3 hostA.lab.mycompany.net (192.1.4.2)
Round trip time 2 ms; total ttl of 2 required.

Waiting to accumulate statistics...Results after 10 seconds:

Source      Response Dest    Overall    Packet Statistics For Traffic From
192.1.4.2 192.1.1.2  Packet    192.1.4.2 To 225.1.1.1
      v      ___/ rtt    2 ms      Rate      Lost/Sent = Pct  Rate
192.1.2.1
192.1.3.2 routerC.lab.mycompany.net
      v      ^      ttl    2              0/0    = --    0 pps
192.1.4.1
192.1.2.2 routerB.lab.mycompany.net
      v      \___  ttl    3              ?/0              0 pps
192.1.1.2 192.1.1.2
Receiver      Query Source

```



## mtrace monitor

|                                 |                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | mtrace monitor                                                                                                                                                                           |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series. |
| <b>Description</b>              | Listen passively for IP multicast responses. To exit the <b>mtrace monitor</b> command, type Ctrl+c.                                                                                     |
| <b>Options</b>                  | <b>none</b> —Trace the master instance.                                                                                                                                                  |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                     |
| <b>List of Sample Output</b>    | <a href="#">mtrace monitor on page 3954</a>                                                                                                                                              |
| <b>Output Fields</b>            | <a href="#">Table 246 on page 3953</a> describes the output fields for the <b>mtrace monitor</b> command. Output fields are listed in the approximate order in which they appear.        |

**Table 246: mtrace monitor Output Fields**

| Field Name              | Field Description                                             |
|-------------------------|---------------------------------------------------------------|
| <b>Mtrace query at</b>  | Date and time of the query.                                   |
| <b>by</b>               | Address of the host issuing the query.                        |
| <b>resp to</b>          | Response destination.                                         |
| <b>qid</b>              | Query ID number.                                              |
| <b>packet from...to</b> | IP address of the query source and default group destination. |
| <b>from...to</b>        | IP address of the multicast source and the response address.  |
| <b>via group</b>        | IP address of the group to trace.                             |
| <b>mxhop</b>            | Maximum hop setting.                                          |



## Sample Output

### mtrace monitor

```
user@host> mtrace monitor
Mtrace query at Oct 22 13:36:14 by 192.1.3.2, resp to 224.0.1.32, qid 74a5b8
packet from 192.1.3.2 to 224.0.0.2
from 192.1.3.2 to 192.1.3.38 via group 224.1.1.1 (mxhop=60)

Mtrace query at Oct 22 13:36:17 by 192.1.3.2, resp to 224.0.1.32, qid 1d07ba
packet from 192.1.3.2 to 224.0.0.2
from 192.1.3.2 to 192.1.3.38 via group 224.1.1.1 (mxhop=60)

Mtrace query at Oct 22 13:36:20 by 192.1.3.2, resp to same, qid 2fea1d
packet from 192.1.3.2 to 224.0.0.2
from 192.1.3.2 to 192.1.3.38 via group 224.1.1.1 (mxhop=60)

Mtrace query at Oct 22 13:36:30 by 192.1.3.2, resp to same, qid 7c88ad
packet from 192.1.3.2 to 224.0.0.2
from 192.1.3.2 to 192.1.3.38 via group 224.1.1.1 (mxhop=60)
```



## mtrace to-gateway

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> mtrace to-gateway gateway gateway &lt;brief   detail&gt; &lt;extra-hops extra-hops&gt; &lt;group group&gt; &lt;interface interface-name&gt; &lt;interval interval&gt; &lt;loop&gt; &lt;max-hops max-hops&gt; &lt;max-queries max-queries&gt; &lt;multicast-response   unicast-response&gt; &lt;no-resolve&gt; &lt;no-router-alert&gt; &lt;response response&gt; &lt;routing-instance routing-instance-name&gt; &lt;tll ttl&gt; &lt;unicast-response&gt; &lt;wait-time wait-time&gt; </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b> | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>         | Display trace information about a multicast path from this router or switch to a gateway router or switch.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>             | <p><b>gateway gateway</b>—Send the trace query to a gateway multicast address.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>extra-hops extra-hops</b>—(Optional) Number of hops to take after reaching a nonresponsive router or switch. You can specify a number between <b>0</b> and <b>255</b>.</p> <p><b>group group</b>—(Optional) Group address for which to trace the path. The default group address is <b>0.0.0.0</b>.</p> <p><b>interface interface-name</b>—(Optional) Source address for sending the trace query.</p> <p><b>interval interval</b>—(Optional) Number of seconds to wait before gathering statistics again. The default value is <b>10</b>.</p> <p><b>loop</b>—(Optional) Loop indefinitely, displaying rate and loss statistics.</p> <p><b>max-hops max-hops</b>—(Optional) Maximum hops to trace toward the source. You can specify a number between <b>0</b> and <b>255</b>. The default value is <b>32</b>.</p> <p><b>max-queries max-queries</b>—(Optional) Maximum number of query attempts for any hop. You can specify a number between <b>0</b> and <b>255</b>. The default value is <b>3</b>.</p> <p><b>multicast-response</b>—(Optional) Always request the response using multicast.</p> <p><b>no-resolve</b>—(Optional) Do not attempt to display addresses symbolically.</p> |



**no-router-alert**—(Optional) Do not use the router-alert IP option.

**response *response***—(Optional) Send trace response to a host or multicast address.

**routing-instance *routing-instance-name***—(Optional) Trace a particular routing instance.

**ttl *tll***—(Optional) IP time-to-live value. You can specify a number between 0 and 225. Local queries to the multicast group use TTL 1. Otherwise, the default value is 127.

**unicast-response**—(Optional) Always request the response using unicast.

**wait-time *wait-time***—(Optional) Number of seconds to wait for a response. The default value is 3.

Required Privilege Level

view

List of Sample Output [mtrace to-gateway on page 3957](#)

Output Fields [Table 247 on page 3956](#) describes the output fields for the **mtrace to-gateway** command. Output fields are listed in the approximate order in which they appear.

**Table 247: mtrace to-gateway Output Fields**

| Field Name                        | Field Description                                             |
|-----------------------------------|---------------------------------------------------------------|
| <b>Mtrace from</b>                | IP address of the receiver.                                   |
| <b>to</b>                         | IP address of the source.                                     |
| <b>via group</b>                  | IP address of the multicast group (if any).                   |
| <b>Querying full reverse path</b> | Indicates the full reverse path query has begun.              |
| <b><i>number-of-hops</i></b>      | Number of hops from the source to the named router or switch. |
| <b><i>router-name</i></b>         | Name of the router or switch for this hop.                    |
| <b><i>address</i></b>             | Address of the router or switch for this hop.                 |
| <b><i>protocol</i></b>            | Protocol used (for example, PIM).                             |
| <b>Round trip time</b>            | Average round-trip time, in milliseconds (ms).                |
| <b>total ttl of</b>               | Time-to-live (TTL) threshold.                                 |



## Sample Output

```
mtrace to-gateway      user@host> mtrace to-gateway gateway 192.1.3.2 group 225.1.1.1 interface 192.1.1.73 brief

Mtrace from 192.1.1.73 to 192.1.1.2 via group 225.1.1.1
Querying full reverse path... * *
  0  routerA.lab.mycompany.net (192.1.1.2)
-1  routerA.lab.mycompany.net (192.1.1.2)  PIM  thresh^ 1
-2  routerB.lab.mycompany.net (192.1.2.2)  PIM  thresh^ 1
-3  routerC.lab.mycompany.net (192.1.3.2)  PIM  thresh^ 1
Round trip time 2 ms; total ttl of 3 required.
```



## show configuration protocols igmp

|                                 |                                                                                                                                                                           |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show configuration protocols igmp                                                                                                                                         |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                           |
| <b>Description</b>              | Display Internet Group Management Protocol (IGMP) information.                                                                                                            |
| <b>Required Privilege Level</b> | view                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">IGMP Snooping Overview on page 3674</a></li> <li>• <a href="#">Configuring IGMP Snooping on page 3758</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show configuration protocols igmp on page 3959</a>                                                                                                            |
| <b>Output Fields</b>            | <a href="#">Table 248 on page 3958</a> describes the output fields for the <b>show configuration protocols igmp</b> command that relate to IGMP querying.                 |

**Table 248: show igmp group Output Fields**

| Field Name              | Field Description                                                                                        | Level of Output |
|-------------------------|----------------------------------------------------------------------------------------------------------|-----------------|
| accounting              | Enables notification for join and leave events.                                                          | All levels      |
| igmp-querier            | Configured source address for the IGMP querier.                                                          | All levels      |
| interface               | Name of the interface that receives IGMP membership reports.                                             | All levels      |
| query-interval          | Interval at which the IGMP querier sends general host-query messages to solicit membership information.  | All levels      |
| query-response-interval | How long the IGMP querier waits to receive a response from a query message before sending another query. | All levels      |
| src-address             | Source address of IGMP queries.                                                                          |                 |
| version                 | IGMP version.                                                                                            | All levels      |



## Sample Output

show configuration  
protocols igmp

```
user@switch> show configuration protocols igmp
query-interval 150;
query-response-interval 50;
accounting;
interface vlan.43 {
  version 2;
}
igmp-querier {
  src-address 10.0.0.2;
}
```



## show igmp group

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | show igmp group<br><brief   detail><br><group-name><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                                                      |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | show igmp group<br><brief   detail><br><group-name>                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                         |
| <b>Description</b>                                  | Display Internet Group Management Protocol (IGMP) group membership information.                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                                      | <p><b>none</b>—Display standard information about membership for all IGMP groups.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>group-name</b>—(Optional) Display group membership for the specified IP address only.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>                        | <ul style="list-style-type: none"> <li><a href="#">clear igmp membership on page 3927</a></li> </ul>                                                                                                                                                                                                                                                                                                                             |
| <b>List of Sample Output</b>                        | <a href="#">show igmp group (Include Mode) on page 3962</a><br><a href="#">show igmp group (Exclude Mode) on page 3962</a><br><a href="#">show igmp group brief on page 3962</a><br><a href="#">show igmp group detail on page 3962</a>                                                                                                                                                                                          |
| <b>Output Fields</b>                                | Table 248 on page 3958 describes the output fields for the <b>show igmp group</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                               |

**Table 249: show igmp group Output Fields**

| Field Name        | Field Description                                                                                                                                       | Level of Output |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Interface</b>  | Name of the interface that received the IGMP membership report. A name of <b>local</b> indicates that the local routing device joined the group itself. | All levels      |
| <b>Group</b>      | Group address.                                                                                                                                          | All levels      |
| <b>Group Mode</b> | Mode the SSM group is operating in: <b>Include</b> or <b>Exclude</b> .                                                                                  | All levels      |
| <b>Source</b>     | Source address.                                                                                                                                         | All levels      |



Table 249: show igmp group Output Fields (*continued*)

| Field Name       | Field Description                                                                                                                                                                                                         | Level of Output |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Source timeout   | Time remaining until the group traffic is no longer forwarded. The timer is refreshed when a listener in include mode sends a report. A group in exclude mode or configured as a static group displays a zero timer.      | detail          |
| Last reported by | Address of the host that last reported membership in this group.                                                                                                                                                          | All levels      |
| Timeout          | Time remaining until the group membership is removed.                                                                                                                                                                     | brief none      |
| Group timeout    | Time remaining until a group in exclude mode moves to include mode. The timer is refreshed when a listener in exclude mode sends a report. A group in include mode or configured as a static group displays a zero timer. | detail          |
| Type             | Type of group membership: <ul style="list-style-type: none"> <li>• <b>Dynamic</b>—Host reported the membership.</li> <li>• <b>Static</b>—Membership is configured.</li> </ul>                                             | All levels      |



## Sample Output

### show igmp group (Include Mode)

```
user@host> show igmp group
Interface: t1-0/1/0.0
  Group: 232.1.1.1
    Group mode: Include
    Source: 10.0.0.2
    Last reported by: 10.9.5.2
    Timeout: 24 Type: Dynamic
  Group: 232.1.1.1
    Group mode: Include
    Source: 10.0.0.3
    Last reported by: 10.9.5.2
    Timeout: 24 Type: Dynamic
  Group: 232.1.1.1
    Group mode: Include
    Source: 10.0.0.4
    Last reported by: 10.9.5.2
    Timeout: 24 Type: Dynamic
  Group: 232.1.1.2
    Group mode: Include
    Source: 10.0.0.4
    Last reported by: 10.9.5.2
    Timeout: 24 Type: Dynamic
Interface: t1-0/1/1.0
Interface: ge-0/2/2.0
Interface: ge-0/2/0.0
Interface: local
  Group: 224.0.0.2
    Source: 0.0.0.0
    Last reported by: Local
    Timeout: 0 Type: Dynamic
  Group: 224.0.0.22
    Source: 0.0.0.0
    Last reported by: Local
    Timeout: 0 Type: Dynamic
```

### show igmp group (Exclude Mode)

```
user@host> show igmp group
Interface: t1-0/1/0.0
Interface: t1-0/1/1.0
Interface: ge-0/2/2.0
Interface: ge-0/2/0.0
Interface: local
  Group: 224.0.0.2
    Source: 0.0.0.0
    Last reported by: Local
    Timeout: 0 Type: Dynamic
  Group: 224.0.0.22
    Source: 0.0.0.0
    Last reported by: Local
    Timeout: 0 Type: Dynamic
```

### show igmp group brief

The output for the **show igmp group brief** command is identical to that for the **show igmp group** command.

### show igmp group detail

```
user@host> show igmp group detail
```



```
Interface: t1-0/1/0.0
  Group: 232.1.1.1
    Group mode: Include
    Source: 10.0.0.2
    Source timeout: 12
    Last reported by: 10.9.5.2
    Group timeout: 0 Type: Dynamic
  Group: 232.1.1.1
    Group mode: Include
    Source: 10.0.0.3
    Source timeout: 12
    Last reported by: 10.9.5.2
    Group timeout: 0 Type: Dynamic
  Group: 232.1.1.1
    Group mode: Include
    Source: 10.0.0.4
    Source timeout: 12
    Last reported by: 10.9.5.2
    Group timeout: 0 Type: Dynamic
  Group: 232.1.1.2
    Group mode: Include
    Source: 10.0.0.4
    Source timeout: 12
    Last reported by: 10.9.5.2
    Group timeout: 0 Type: Dynamic
Interface: t1-0/1/1.0
Interface: ge-0/2/2.0
Interface: ge-0/2/0.0
Interface: local
  Group: 224.0.0.2
    Group mode: Exclude
    Source: 0.0.0.0
    Source timeout: 0
    Last reported by: Local
    Group timeout: 0 Type: Dynamic
  Group: 224.0.0.22
    Group mode: Exclude
    Source: 0.0.0.0
    Source timeout: 0
    Last reported by: Local
    Group timeout: 0 Type: Dynamic
```



## show igmp interface

|                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                         | show igmp interface<br><brief   detail><br><interface-name><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                                                        |
| <b>Syntax (EX Series Switches and the QFX Series)</b> | show igmp interface<br><brief   detail><br><interface-name>                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>                            | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                   |
| <b>Description</b>                                    | Display information about Internet Group Management Protocol (IGMP)-enabled interfaces.                                                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>                                        | <p><b>none</b>—Display standard information about all IGMP-enabled interfaces.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>interface-name</b>—(Optional) Display information about the specified IGMP-enabled interface only.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                       | view                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>                          | <ul style="list-style-type: none"> <li><a href="#">clear igmp membership on page 3927</a></li> </ul>                                                                                                                                                                                                                                                                                                                                       |
| <b>List of Sample Output</b>                          | <a href="#">show igmp interface on page 3967</a><br><a href="#">show igmp interface brief on page 3967</a><br><a href="#">show igmp interface detail on page 3967</a><br><a href="#">show igmp interface &lt;interface-name&gt; on page 3967</a>                                                                                                                                                                                           |
| <b>Output Fields</b>                                  | <p><a href="#">Table 250 on page 3964</a> describes the output fields for the <b>show igmp interface</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                                                                              |

**Table 250: show igmp interface Output Fields**

| Field Name | Field Description                                                               | Level of Output |
|------------|---------------------------------------------------------------------------------|-----------------|
| Interface  | Name of the interface.                                                          | All levels      |
| Querier    | Address of the routing device that has been elected to send membership queries. | All levels      |
| State      | State of the interface: <b>Up</b> or <b>Down</b> .                              | All levels      |



Table 250: show igmp interface Output Fields (*continued*)

| Field Name                | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Level of Output |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>SSM Map Policy</b>     | Name of the source-specific multicast (SSM) map policy that has been applied to the IGMP interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | All levels      |
| <b>Timeout</b>            | How long until the IGMP querier is declared to be unreachable, in seconds.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | All levels      |
| <b>Version</b>            | IGMP version being used on the interface: 1 , 2 , or 3.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | All levels      |
| <b>Groups</b>             | Number of groups on the interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | All levels      |
| <b>Group limit</b>        | Maximum number of groups allowed on the interface. Any joins requested after the limit is reached are rejected.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | All levels      |
| <b>Group threshold</b>    | Configured threshold at which a warning message is generated.<br><br>This threshold is based on a percentage of groups received on the interface. If the number of groups received reaches the configured threshold, the device generates a warning message.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | All levels      |
| <b>Group log-interval</b> | Time (in seconds) between consecutive log messages.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | All levels      |
| <b>Immediate Leave</b>    | State of the immediate leave option: <ul style="list-style-type: none"> <li>• <b>On</b>—Indicates that the router removes a host from the multicast group as soon as the router receives a leave group message from a host associated with the interface.</li> <li>• <b>Off</b>—Indicates that after receiving a leave group message, instead of removing a host from the multicast group immediately, the router sends a group query to determine if another receiver responds.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                         | All levels      |
| <b>Promiscuous Mode</b>   | State of the promiscuous mode option: <ul style="list-style-type: none"> <li>• <b>On</b>—Indicates that the router can accept IGMP reports from subnetworks that are not associated with its interfaces.</li> <li>• <b>Off</b>—Indicates that the router can accept IGMP reports only from subnetworks that are associated with its interfaces.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | All levels      |
| <b>Passive</b>            | State of the passive mode option: <ul style="list-style-type: none"> <li>• <b>On</b>—Indicates that the router can run IGMP on the interface but not send or receive control traffic such as IGMP reports, queries, and leaves.</li> <li>• <b>Off</b>—Indicates that the router can run IGMP on the interface and send or receive control traffic such as IGMP reports, queries, and leaves.</li> </ul> <p>The <b>passive</b> statement enables you to selectively activate up to two out of a possible three available query or control traffic options. When enabled, the following options appear after the <b>on</b> state declaration:</p> <ul style="list-style-type: none"> <li>• <b>send-general-query</b>—The interface sends general queries.</li> <li>• <b>send-group-query</b>—The interface sends group-specific and group-source-specific queries.</li> <li>• <b>allow-receive</b>—The interface receives control traffic.</li> </ul> | All levels      |
| <b>OIF map</b>            | Name of the OIF map (if configured) associated with the interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | All levels      |



Table 250: show igmp interface Output Fields (*continued*)

| Field Name                   | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Level of Output |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>SSM map</b>               | Name of the source-specific multicast (SSM) map (if configured) used on the interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | All levels      |
| <b>Configured Parameters</b> | Information configured by the user: <ul style="list-style-type: none"> <li>• <b>IGMP Query Interval</b>—Interval (in seconds) at which this router sends membership queries when it is the querier.</li> <li>• <b>IGMP Query Response Interval</b>—Time (in seconds) that the router waits for a report in response to a general query.</li> <li>• <b>IGMP Last Member Query Interval</b>—Time (in seconds) that the router waits for a report in response to a group-specific query.</li> <li>• <b>IGMP Robustness Count</b>—Number of times the router retries a query.</li> </ul> | All levels      |
| <b>Derived Parameters</b>    | Derived information: <ul style="list-style-type: none"> <li>• <b>IGMP Membership Timeout</b>—Timeout period (in seconds) for group membership. If no report is received for these groups before the timeout expires, the group membership is removed.</li> <li>• <b>IGMP Other Querier Present Timeout</b>—Time (in seconds) that the router waits for the IGMP querier to send a query.</li> </ul>                                                                                                                                                                                  | All levels      |



## Sample Output

### show igmp interface

```
user@host> show igmp interface
Interface: at-0/3/1.0
  Querier: 10.111.30.1
  State:      Up Timeout:   None Version:  2 Groups:      4
  SSM Map Policy: ssm-policy-A
Interface: so-1/0/0.0
  Querier: 10.111.10.1
  State:      Up Timeout:   None Version:  2 Groups:      2
  SSM Map Policy: ssm-policy-B
Interface: so-1/0/1.0
  Querier: 10.111.20.1
  State:      Up Timeout:   None Version:  2 Groups:      4
  SSM Map Policy: ssm-policy-C
Immediate Leave: On
Promiscuous Mode: Off

Configured Parameters:
IGMP Query Interval: 125.0
IGMP Query Response Interval: 10.0
IGMP Last Member Query Interval: 1.0
IGMP Robustness Count: 2

Derived Parameters:
IGMP Membership Timeout: 260.0
IGMP Other Querier Present Timeout: 255.0
```

### show igmp interface brief

The output for the **show igmp interface brief** command is identical to that for the **show igmp interface** command. For sample output, see [show igmp interface on page 3967](#).

### show igmp interface detail

The output for the **show igmp interface detail** command is identical to that for the **show igmp interface** command. For sample output, see [show igmp interface on page 3967](#).

### show igmp interface <interface-name>

```
user@host# show igmp interface ge-3/2/0.0
Interface: ge-3/2/0.0
  Querier: 20.1.1.1
  State: Up Timeout:   None Version:  3 Groups:      1
  Group limit: 8
  Group threshold: 60
  Group log-interval: 10
  Immediate leave: Off
  Promiscuous mode: Off
```



## show igmp statistics

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | show igmp statistics<br><brief   detail><br><interface <i>interface-name</i> ><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                         |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | show igmp statistics<br><brief   detail><br><interface <i>interface-name</i> >                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                       |
| <b>Description</b>                                  | Display Internet Group Management Protocol (IGMP) statistics.                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                                      | <p><b>none</b>—Display IGMP statistics for all interfaces.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Display IGMP statistics about the specified interface only.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>                        | <ul style="list-style-type: none"> <li><a href="#">clear igmp statistics on page 3931</a></li> </ul>                                                                                                                                                                                                                                                                                                                           |
| <b>List of Sample Output</b>                        | <a href="#">show igmp statistics on page 3970</a><br><a href="#">show igmp statistics interface on page 3970</a>                                                                                                                                                                                                                                                                                                               |
| <b>Output Fields</b>                                | Table 251 on page 3968 describes the output fields for the <b>show igmp statistics</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                        |

**Table 251: show igmp statistics Output Fields**

| Field Name             | Field Description                                                                          |
|------------------------|--------------------------------------------------------------------------------------------|
| IGMP packet statistics | Heading for IGMP packet statistics for all interfaces or for the specified interface name. |



Table 251: show igmp statistics Output Fields (*continued*)

| Field Name                    | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>IGMP Message type</b>      | <p>Summary of IGMP statistics:</p> <ul style="list-style-type: none"> <li>• <b>Membership Query</b>—Number of membership queries sent and received.</li> <li>• <b>V1 Membership Report</b>—Number of version 1 membership reports sent and received.</li> <li>• <b>DVMRP</b>—Number of DVMRP messages sent or received.</li> <li>• <b>PIM V1</b>—Number of PIM version 1 messages sent or received.</li> <li>• <b>Cisco Trace</b>—Number of Cisco trace messages sent or received.</li> <li>• <b>V2 Membership Report</b>—Number of version 2 membership reports sent or received.</li> <li>• <b>Group Leave</b>—Number of group leave messages sent or received.</li> <li>• <b>Mtrace Response</b>—Number of Mtrace response messages sent or received.</li> <li>• <b>Mtrace Request</b>—Number of Mtrace request messages sent or received.</li> <li>• <b>Domain Wide Report</b>—Number of domain-wide reports sent or received.</li> <li>• <b>V3 Membership Report</b>—Number of version 3 membership reports sent or received.</li> <li>• <b>Other Unknown types</b>—Number of unknown message types received.</li> <li>• <b>IGMP v3 unsupported type</b>—Number of messages received with unknown and unsupported IGMP version 3 message types.</li> <li>• <b>IGMP v3 source required for SSM</b>—Number of IGMP version 3 messages received that contained no source.</li> <li>• <b>IGMP v3 mode not applicable for SSM</b>—Number of IGMP version 3 messages received that did not contain a mode applicable for source-specific multicast (SSM).</li> </ul> |
| <b>Received</b>               | Number of messages received.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Sent</b>                   | Number of messages sent.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Rx errors</b>              | Number of received packets that contained errors.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>IGMP Global Statistics</b> | <p>Summary of IGMP statistics for all interfaces.</p> <ul style="list-style-type: none"> <li>• <b>Bad Length</b>—Number of messages received with length errors so severe that further classification could not occur.</li> <li>• <b>Bad Checksum</b>—Number of messages received with a bad IP checksum. No further classification was performed.</li> <li>• <b>Bad Receive If</b>—Number of messages received on an interface not enabled for IGMP.</li> <li>• <b>Rx non-local</b>—Number of messages received from senders that are not local.</li> <li>• <b>Timed out</b>—Number of groups that timed out as a result of not receiving an explicit leave message.</li> <li>• <b>Rejected Report</b>—Number of reports dropped because of the IGMP group policy.</li> <li>• <b>Total Interfaces</b>—Number of interfaces configured to support IGMP.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



## Sample Output

### show igmp statistics

```
user@host> show igmp statistics
IGMP packet statistics for all interfaces
IGMP Message type      Received      Sent  Rx errors
Membership Query        8883         459      0
V1 Membership Report    0            0        0
DVMRP                   0            0        0
PIM V1                  0            0        0
Cisco Trace             0            0        0
V2 Membership Report    0            0        0
Group Leave             0            0        0
Mtrace Response         0            0        0
Mtrace Request          0            0        0
Domain Wide Report      0            0        0
V3 Membership Report    0            0        0
Other Unknown types     0            0        0
IGMP v3 unsupported type 0            0        0
IGMP v3 source required for SSM 0            0        0
IGMP v3 mode not applicable for SSM 0            0        0

IGMP Global Statistics
Bad Length              0
Bad Checksum            0
Bad Receive If          0
Rx non-local            1227
Timed out               0
Rejected Report         0
Total Interfaces        2
```

### show igmp statistics interface

```
user@host> show igmp statistics interface fe-1/0/1.0
IGMP interface packet statistics for fe-1/0/1.0
IGMP Message type      Received      Sent  Rx errors
Membership Query        0            230      0
V1 Membership Report    0            0        0
```



## show igmp-snooping membership

|                                 |                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>show igmp-snooping membership &lt;brief   detail&gt; &lt;interface <i>interface-name</i>&gt; &lt;vlan <i>vlan-id</i>   <i>vlan-name</i>&gt;</pre>                                                                                                                                                                                                                              |
| <b>Release Information</b>      | <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>IGMPv3 output introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                 |
| <b>Description</b>              | Display IGMP snooping membership information.                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <p><b>none</b>—Display general parameters.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Display IGMP snooping information for the specified interface.</p> <p><b>vlan <i>vlan-id</i>   <i>vlan-name</i></b>—(Optional) Display IGMP snooping information for the specified VLAN.</p>     |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Monitoring IGMP Snooping on page 3925</a></li> <li>• <a href="#">Configuring IGMP Snooping on page 3758</a></li> <li>• <a href="#">show igmp-snooping route on page 3974</a></li> <li>• <a href="#">show igmp-snooping statistics on page 3976</a></li> <li>• <a href="#">show igmp-snooping vlans on page 3978</a></li> </ul> |
| <b>List of Sample Output</b>    | <p><a href="#">show igmp-snooping membership on page 3973</a></p> <p><a href="#">show igmp-snooping membership detail on page 3973</a></p>                                                                                                                                                                                                                                          |
| <b>Output Fields</b>            | <p><a href="#">Table 252 on page 3971</a> lists the output fields for the <b>show igmp-snooping membership</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                 |

**Table 252: show igmp-snooping membership Output Fields**

| Field Name | Field Description                 | Level of Output |
|------------|-----------------------------------|-----------------|
| VLAN       | Name of the VLAN.                 | All             |
| Interfaces | Interfaces assigned to the VLAN.  | All             |
| Tag        | Numerical identifier of the VLAN. | <b>detail</b>   |



Table 252: show igmp-snooping membership Output Fields (*continued*)

| Field Name          | Field Description                                                                                                                                                                                     | Level of Output |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Router interfaces   | Names of multicast router interfaces.                                                                                                                                                                 | detail          |
| • static or dynamic | Whether the multicast router interface is <b>static</b> or <b>dynamic</b> .                                                                                                                           | detail          |
| • Uptime            | For static interfaces, length of time since the interface was configured as a multicast router interface; for dynamic interfaces, length of time since the first query was received on the interface. | detail          |
| • timeout           | Query timeout in seconds.                                                                                                                                                                             | detail          |
| Group               | IP multicast address of the multicast group.                                                                                                                                                          | detail          |
| Receiver count      | Number of interfaces that have membership in a multicast group.                                                                                                                                       | detail          |
| Flags               | IGMP version of the host sending a join message.                                                                                                                                                      | detail          |
| Uptime              | Length of time a multicast group has been active on the interface.                                                                                                                                    | detail          |
| timeout             | Time (in seconds) left until the entry for the multicast group is removed.                                                                                                                            | All             |
| Last reporter       | Last host to report membership for the multicast group.                                                                                                                                               | detail          |
| Include source      | Source addresses from which multicast streams are allowed based on IGMPv3 reports.                                                                                                                    | detail          |



## Sample Output

### show igmp-snooping membership

```
user@switch> show igmp-snooping membership
VLAN: v1
  224.1.1.1      *           258 secs
    Interfaces: ge-0/0/0.0
  224.1.1.3      *           258 secs
    Interfaces: ge-0/0/0.0
  224.1.1.5      *           258 secs
    Interfaces: ge-0/0/0.0
  224.1.1.7      *           258 secs
    Interfaces: ge-0/0/0.0
  224.1.1.9      *           258 secs
    Interfaces: ge-0/0/0.0
  224.1.1.11     *           258 secs
    Interfaces: ge-0/0/0.0
```

### show igmp-snooping membership detail

```
user@switch> show igmp-snooping membership detail
VLAN: v43 Tag: 43 (Index: 4)
  Group: 225.0.0.2
    Receiver count: 1, Flags: <V3-hosts>
      ge-0/0/15.0 Uptime: 00:00:11 timeout: 248 Last reporter: 10.2.10.16
      Include source: 1.2.1.1, 1.3.1.1
VLAN: v44 Tag: 44 (Index: 5)
  Group: 225.0.0.1
    Receiver count: 1, Flags: <V2-hosts>
      ge-0/0/21.0 Uptime: 00:00:02 timeout: 257
VLAN: v110 Tag: 110 (Index: 4)
  Router interfaces:
    ge-0/0/3.0 static Uptime: 00:08:45
    ge-0/0/2.0 static Uptime: 00:08:45
    ge-0/0/4.0 dynamic Uptime: 00:16:41 timeout: 254
  Group: 225.0.0.3
    Receiver count: 1, Flags: <V3-hosts>
      ge-0/0/5.0 Uptime: 00:00:19 timeout: 259
  Group: 225.1.1.1
    Receiver count: 1, Flags: <V2-hosts>
      ge-0/0/5.0 Uptime: 00:22:43 timeout: 96
  Group: 225.2.2.2
    Receiver count: 1, Flags: <V2-hosts Static>
      ge-0/0/5.0 Uptime: 00:23:13
```



## show igmp-snooping route

|                                 |                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>show igmp-snooping route &lt;brief   detail&gt; &lt;ethernet-switching &lt;brief   detail   vlan (vlan-id   vlan-name )&gt;&gt; &lt;inet &lt;brief   detail   vlan vlan-name&gt;&gt; &lt;vlan vlan-name&gt;</pre>                                                                                                                                                     |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | Display IGMP snooping route information.                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <p><b>none</b>—Display general parameters.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>ethernet-switching</b>—(Optional) Display Ethernet switching information.</p> <p><b>inet</b>—(Optional) Display <b>inet</b> information.</p> <p><b>vlan vlan-name</b>—(Optional) Display route information for the specified VLAN.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Monitoring IGMP Snooping on page 3925</a></li> <li>• <a href="#">Configuring IGMP Snooping on page 3758</a></li> <li>• <a href="#">show igmp-snooping statistics on page 3976</a></li> <li>• <a href="#">show igmp-snooping vlans on page 3978</a></li> </ul>                                                         |
| <b>List of Sample Output</b>    | <p><a href="#">show igmp-snooping route on page 3975</a></p> <p><a href="#">show igmp-snooping route vlan v1 on page 3975</a></p>                                                                                                                                                                                                                                          |
| <b>Output Fields</b>            | <p><a href="#">Table 253 on page 3974</a> lists the output fields for the <b>show igmp-snooping route</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                             |

**Table 253: show igmp-snooping route Output Fields**

| Field Name | Field Description                              |
|------------|------------------------------------------------|
| Table      | (For internal use only. Value is always 0.)    |
| VLAN       | Name of the VLAN.                              |
| Group      | Multicast group address.                       |
| Interfaces | Interfaces on which IGMP packets were snooped. |
| Next-hop   | ID associated with the next-hop device.        |



## Sample Output

**show igmp-snooping  
route**

```
user@switch> show igmp-snooping route
VLAN          Group          Next-hop
V11           224.1.1.1, *    533
               Interfaces: ge-0/0/13.0, ge-0/0/1.0
VLAN          Group          Next-hop
v12           224.1.1.3, *    534
               Interfaces: ge-0/0/13.0, ge-0/0/0.0
```

**show igmp-snooping  
route vlan v1**

```
user@switch> show igmp-snooping route vlan v1
Table: 0
VLAN          Group          Next-hop
v1           224.1.1.1, *    1266
               Interfaces: ge-0/0/0.0
v1           224.1.1.3, *    1266
               Interfaces: ge-0/0/0.0
v1           224.1.1.5, *    1266
               Interfaces: ge-0/0/0.0
v1           224.1.1.7, *    1266
               Interfaces: ge-0/0/0.0
v1           224.1.1.9, *    1266
               Interfaces: ge-0/0/0.0
v1           224.1.1.11, *    1266
               Interfaces: ge-0/0/0.0
```



## show igmp-snooping statistics

|                                 |                                                                                                                                                                                                                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <b>show igmp-snooping statistics</b>                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                               |
| <b>Description</b>              | Display IGMP snooping statistics.                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Monitoring IGMP Snooping on page 3925</a></li> <li>• <a href="#">Configuring IGMP Snooping on page 3758</a></li> <li>• <a href="#">show igmp-snooping route on page 3974</a></li> <li>• <a href="#">show igmp-snooping vlans on page 3978</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show igmp-snooping statistics on page 3977</a>                                                                                                                                                                                                                                                    |
| <b>Output Fields</b>            | <a href="#">Table 254 on page 3976</a> lists the output fields for the <b>show igmp-snooping statistics</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                  |

**Table 254: show igmp-snooping statistics Output Fields**

| Field Name        | Field Description                                                                           |
|-------------------|---------------------------------------------------------------------------------------------|
| Bad length        | IGMP packet has illegal or bad length.                                                      |
| Bad checksum      | IGMP or IP checksum is incorrect.                                                           |
| Invalid interface | Packet was received through an invalid interface.                                           |
| Not local         | Number of packets received from senders that are not local.                                 |
| Receive unknown   | Unknown IGMP type.                                                                          |
| Timed out         | Number of timeouts for all multicast groups.                                                |
| IGMP Type         | Type of IGMP message ( <b>Queries</b> , <b>Reports</b> , <b>Leaves</b> , or <b>Other</b> ). |
| Received          | Number of IGMP packets received.                                                            |
| Transmitted       | Number of IGMP packets transmitted.                                                         |
| Recv Errors       | Number of general receive errors.                                                           |



## Sample Output

`show igmp-snooping  
statistics`

`user@switch> show igmp-snooping statistics`

Bad length: 0 Bad checksum: 0 Invalid interface: 0  
Not local: 0 Receive unknown: 0 Timed out: 58

| IGMP Type | Received | Transmitted | Recv Errors |
|-----------|----------|-------------|-------------|
| Queries:  | 74295    | 0           | 0           |
| Reports:  | 18148423 | 0           | 16333523    |
| Leaves:   | 0        | 0           | 0           |
| Other:    | 0        | 0           | 0           |



## show igmp-snooping vlans

|                                 |                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <b>show igmp-snooping vlans</b><br><brief   detail><br><vlan <i>vlan-id</i>   <i>vlan-name</i> >                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                    |
| <b>Description</b>              | Display IGMP snooping VLAN information.                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b>none</b>—Display general parameters.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>vlan <i>vlan-id</i>   vlan <i>vlan-number</i></b>—(Optional) Display VLAN information for the specified VLAN.</p>                                                              |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Monitoring IGMP Snooping on page 3925</a></li> <li>• <a href="#">Configuring IGMP Snooping on page 3758</a></li> <li>• <a href="#">show igmp-snooping route on page 3974</a></li> <li>• <a href="#">show igmp-snooping statistics on page 3976</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show igmp-snooping vlans on page 3979</a><br><a href="#">show igmp-snooping vlans vlan on page 3979</a><br><a href="#">show igmp-snooping vlans vlan detail on page 3979</a>                                                                                                                           |
| <b>Output Fields</b>            | <a href="#">Table 255 on page 3978</a> lists the output fields for the <b>show igmp-snooping vlans</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                            |

**Table 255: show igmp-snooping vlans Output Fields**

| Field Name             | Field Description                                                       | Level of Output |
|------------------------|-------------------------------------------------------------------------|-----------------|
| <b>VLAN</b>            | Name of the VLAN.                                                       | All levels      |
| <b>IGMP-L2-Querier</b> | Source address for IGMP snooping queries (if switch is an IGMP querier) | All levels      |
| <b>Interfaces</b>      | Number of interfaces in the VLAN.                                       | All levels      |
| <b>Groups</b>          | Number of groups in the VLAN.                                           | All levels      |
| <b>MRouters</b>        | Number of multicast routers associated with the VLAN.                   | All levels      |
| <b>Receivers</b>       | Number of host receivers in the VLAN.                                   | All levels      |



Table 255: show igmp-snooping vlans Output Fields (*continued*)

| Field Name         | Field Description                                                                                                                                                                                          | Level of Output |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Tag                | Numerical identifier of the VLAN.                                                                                                                                                                          | detail          |
| tagged   untagged  | Interface participates in a tagged (802.1Q) or untagged (native) VLAN.                                                                                                                                     | detail          |
| vlan-interface     | Internal VLAN interface identifier.                                                                                                                                                                        | detail          |
| Membership timeout | Membership timeout value.                                                                                                                                                                                  | detail          |
| Querier timeout    | Timeout value for interfaces dynamically marked as router or switch interfaces (interfaces that receive queries). When the querier timeout is reached, the switch marks the interface as a host interface. | detail          |
| Interface          | Name of the interface.                                                                                                                                                                                     | detail          |
| Reporters          | Number of dynamic groups on an interface.                                                                                                                                                                  | detail          |

## Sample Output

```

show igmp-snooping vlans      user@switch> show igmp-snooping vlans
                                VLAN      Interfaces Groups MRouters Receivers
                                default    0          0      0        0
                                v1         11         50      0        0
                                v10        1          0      0        0
                                v11        1          0      0        0
                                v180       3          0      1        0
                                v181       3          0      0        0
                                v182       3          0      0        0

show igmp-snooping vlans vlan user@switch> show igmp-snooping vlans vlan v10
                                user@switch> show igmp-snooping vlans vlan v10
                                VLAN      Interfaces Groups MRouters Receivers
                                v10        1          0      0        0

show igmp-snooping vlans vlan user@switch> show igmp-snooping vlans vlan v10 detail
                                user@switch> show igmp-snooping vlans vlan v10 detail
                                VLAN: v10, Tag: 10, vlan-interface: vlan.10
                                Interface: ge-0/0/10.0, tagged, Groups: 0
                                IGMP-L2-Querier: Stopped, SourceAddress: 10.10.1.2

```



## show msdp

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>show msdp &lt;brief   detail&gt; &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;peer <i>peer-address</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Display Multicast Source Discovery Protocol (MSDP) information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <p><b>none</b>—Display standard MSDP information for all routing instances.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display information for the specified instance only.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>peer <i>peer-address</i></b>—(Optional) Display information about the specified peer only.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show msdp source on page 3982</a></li> <li>• <a href="#">show msdp source-active on page 3984</a></li> <li>• <a href="#">show msdp statistics on page 3987</a></li> </ul>                                                                                                                                                                                                                                                                                                              |
| <b>List of Sample Output</b>    | <p><a href="#">show msdp on page 3981</a></p> <p><a href="#">show msdp brief on page 3981</a></p> <p><a href="#">show msdp detail on page 3981</a></p>                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Output Fields</b>            | <a href="#">Table 256 on page 3980</a> describes the output fields for the <b>show msdp</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                |

**Table 256: show msdp Output Fields**

| Field Name    | Field Description                                                                        | Level of Output |
|---------------|------------------------------------------------------------------------------------------|-----------------|
| Peer address  | IP address of the peer.                                                                  | All levels      |
| Local address | Local address of the peer.                                                               | All levels      |
| State         | Status of the MSDP connection: <b>Listen</b> , <b>Established</b> , or <b>Inactive</b> . | All levels      |
| Last up/down  | Time at which the most recent peer-state change occurred.                                | All levels      |



Table 256: show msdp Output Fields (*continued*)

| Field Name           | Field Description                                                                                                                                                                   | Level of Output |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Peer-Group           | Peer group name.                                                                                                                                                                    | All levels      |
| SA Count             | Number of source-active cache entries advertised by each peer that were accepted, compared to the number that were received, in the format <i>number-accepted/number-received</i> . | All levels      |
| Peer Connect Retries | Number of peer connection retries.                                                                                                                                                  | detail          |
| State timer expires  | Number of seconds before another message is sent to a peer.                                                                                                                         | detail          |
| Peer Times out       | Number of seconds to wait for a response from the peer before the peer is declared unavailable.                                                                                     | detail          |
| SA accepted          | Number of entries in the source-active cache accepted from the peer.                                                                                                                | detail          |
| SA received          | Number of entries in the source-active cache received by the peer.                                                                                                                  | detail          |

## Sample Output

### show msdp

```

user@host> show msdp
Peer address    Local address  State          Last up/down  Peer-Group  SA Count
198.32.8.193    198.32.8.195  Established    5d 19:25:44   North23     120/150
198.32.8.194    198.32.8.195  Established    3d 19:27:27   North23     300/345
198.32.8.196    198.32.8.195  Established    5d 19:39:36   North23     10/13
198.32.8.197    198.32.8.195  Established    5d 19:32:27   North23     5/6
198.32.8.198    198.32.8.195  Established    3d 19:33:04   North23     2305/3000

```

### show msdp brief

The output for the **show msdp brief** command is identical to that for the **show msdp** command. For sample output, see [show msdp on page 3981](#).

### show msdp detail

```

user@host> show msdp detail
Peer: 10.255.70.15
Local address: 10.255.70.19
State: Established
Peer Connect Retries: 0
State timer expires: 22
Peer Times out: 49
SA accepted: 0
SA received: 0

```



## show msdp source

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show msdp source</code><br><code>&lt;instance <i>instance-name</i>&gt;</code><br><code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code><br><code>&lt;source-address&gt;</code>                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | Display multicast sources learned from Multicast Source Discovery Protocol (MSDP).                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>                  | <b>none</b> —Display standard MSDP source information for all routing instances.<br><br><b>instance <i>instance-name</i></b> —(Optional) Display information for the specified instance only.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.<br><br><b>source-address</b> —(Optional) IP address and optional prefix length. Display information for the specified source address only. |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show msdp on page 3980</a></li><li>• <a href="#">show msdp source-active on page 3984</a></li><li>• <a href="#">show msdp statistics on page 3987</a></li></ul>                                                                                                                                                                                                                                                                                   |
| <b>List of Sample Output</b>    | <a href="#">show msdp source on page 3983</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                         |



**Output Fields** Table 257 on page 3983 describes the output fields for the **show msdp source** command. Output fields are listed in the approximate order in which they appear.

**Table 257: show msdp source Output Fields**

| Field Name     | Field Description                                                                                                                                                                                                                                                       |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source address | IP address of the source.                                                                                                                                                                                                                                               |
| /Len           | Length of the prefix for this IP address.                                                                                                                                                                                                                               |
| Type           | Discovery method for this multicast source: <ul style="list-style-type: none"> <li>• <b>Configured</b>—Source-active limit explicitly configured for this source.</li> <li>• <b>Dynamic</b>—Source-active limit established when this source was discovered.</li> </ul> |
| Maximum        | Source-active limit applied to this source.                                                                                                                                                                                                                             |
| Threshold      | Source-active threshold applied to this source.                                                                                                                                                                                                                         |
| Exceeded       | Number of source-active messages received from this source exceeding the established maximum.                                                                                                                                                                           |

## Sample Output

**show msdp source**

```

user@host> show msdp source
Source address /Len  Type      Maximum  Threshold  Exceeded
0.0.0.0        /0    Configured    5        none       0
10.1.0.0       /16   Configured   500      none       0
10.1.1.1       /32   Configured  10000    none       0
10.1.1.2       /32   Dynamic     6936     none       0
10.1.5.5       /32   Dynamic     500      none      123
10.2.1.1       /32   Dynamic      2        none       0

```



## show msdp source-active

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show msdp source-active</code><br><code>&lt;brief   detail&gt;</code><br><code>&lt;group <i>group</i>&gt;</code><br><code>&lt;instance <i>instance-name</i>&gt;</code><br><code>&lt;local&gt;</code><br><code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code><br><code>&lt;originator <i>originator</i>&gt;</code><br><code>&lt;peer <i>peer-address</i>&gt;</code><br><code>&lt;source <i>source-address</i>&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Display the Multicast Source Discovery Protocol (MSDP) source-active cache.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <b>none</b> —Display standard MSDP source-active cache information for all routing instances.<br><br><b>brief   detail</b> —(Optional) Display the specified level of output.<br><br><b>group <i>group</i></b> —(Optional) Display source-active cache information for the specified group.<br><br><b>instance <i>instance-name</i></b> —(Optional) Display information for the specified instance.<br><br><b>local</b> —(Optional) Display all source-active caches originated by this router.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.<br><br><b>originator <i>originator</i></b> —(Optional) Display information about the peer that originated the source-active cache entries.<br><br><b>peer <i>peer-address</i></b> —(Optional) Display the source-active cache of the specified peer.<br><br><b>source <i>source-address</i></b> —(Optional) Display the source-active cache of the specified source. |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show msdp on page 3980</a></li><li>• <a href="#">show msdp source on page 3982</a></li><li>• <a href="#">show msdp statistics on page 3987</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>List of Sample Output</b>    | <a href="#">show msdp source-active on page 3986</a><br><a href="#">show msdp source-active brief on page 3986</a><br><a href="#">show msdp source-active detail on page 3986</a><br><a href="#">show msdp source-active source on page 3986</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Output Fields</b>            | <a href="#">Table 258 on page 3985</a> describes the output fields for the <b>show msdp source-active</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |



Table 258: show msdp source-active Output Fields

| Field Name                              | Field Description                                                                                                                                          |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Global active source limit exceeded     | Number of times all peers have exceeded configured active source limits.                                                                                   |
| Global active source limit maximum      | Configured number of active source messages accepted by the device.                                                                                        |
| Global active source limit threshold    | Configured threshold for applying random early discard (RED) to drop some but not all MSDP active source messages.                                         |
| Global active source limit log-warning  | Threshold at which a warning message is logged (percentage of the number of active source messages accepted by the device).                                |
| Global active source limit log interval | Time (in seconds) between consecutive log messages.                                                                                                        |
| Group address                           | Multicast address of the group.                                                                                                                            |
| Source address                          | IP address of the source.                                                                                                                                  |
| Peer address                            | IP address of the peer.                                                                                                                                    |
| Originator                              | Router ID configured on the source of the rendezvous point (RP) that originated the message, or the loopback address when the router ID is not configured. |
| Flags                                   | Flags: <b>Accept</b> , <b>Reject</b> , or <b>Filtered</b> .                                                                                                |



## Sample Output

### `show msdp source-active`

```
user@host> show msdp source-active
Group address  Source address  Peer address  Originator  Flags
230.0.0.0      192.168.195.46  local        10.255.14.30 Accept
230.0.0.1      192.168.195.46  local        10.255.14.30 Accept
230.0.0.2      192.168.195.46  local        10.255.14.30 Accept
230.0.0.3      192.168.195.46  local        10.255.14.30 Accept
230.0.0.4      192.168.195.46  local        10.255.14.30 Accept
```

### `show msdp source-active brief`

The output for the **show msdp source-active brief** command is identical to that for the **show msdp source-active** command. For sample output, see [show msdp source-active on page 3986](#).

### `show msdp source-active detail`

The output for the **show msdp source-active detail** command is identical to that for the **show msdp source-active** command. For sample output, see [show msdp source-active on page 3986](#).

### `show msdp source-active source`

```
user@host> show msdp source-active source 192.168.215.246
Global active source limit exceeded: 0
Global active source limit maximum: 25000
Global active source limit threshold: 24000
Global active source limit log-warning: 100
Global active source limit log interval: 0

Group address  Source address  Peer address  Originator  Flags
226.2.2.1      192.168.215.246 10.255.182.140 10.255.182.140 Accept
226.2.2.3      192.168.215.246 10.255.182.140 10.255.182.140 Accept
226.2.2.4      192.168.215.246 10.255.182.140 10.255.182.140 Accept
226.2.2.5      192.168.215.246 10.255.182.140 10.255.182.140 Accept
226.2.2.7      192.168.215.246 10.255.182.140 10.255.182.140 Accept
226.2.2.10     192.168.215.246 10.255.182.140 10.255.182.140 Accept
226.2.2.11     192.168.215.246 10.255.182.140 10.255.182.140 Accept
226.2.2.13     192.168.215.246 10.255.182.140 10.255.182.140 Accept
226.2.2.14     192.168.215.246 10.255.182.140 10.255.182.140 Accept
226.2.2.15     192.168.215.246 10.255.182.140 10.255.182.140 Accept
```



## show msdp statistics

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show msdp statistics<br><instance <i>instance-name</i> ><br><logical-system (all   <i>logical-system-name</i> )><br><peer <i>peer-address</i> >                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Display statistics about Multicast Source Discovery Protocol (MSDP) peers.                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>                  | <p><b>none</b>—Display statistics about all MSDP peers for all routing instances.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display statistics about a specific MSDP instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>peer <i>peer-address</i></b>—(Optional) Display statistics about a particular MSDP peer.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">clear msdp statistics on page 3935</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                           |
| <b>List of Sample Output</b>    | <a href="#">show msdp statistics on page 3990</a><br><a href="#">show msdp statistics peer on page 3990</a>                                                                                                                                                                                                                                                                                                                                                    |
| <b>Output Fields</b>            | <p><a href="#">Table 259 on page 3987</a> describes the output fields for the <b>show msdp statistics</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                                                                                                 |

**Table 259: show msdp statistics Output Fields**

| Field Name                              | Field Description                                                                                                           |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Global active source limit exceeded     | Number of times all peers have exceeded configured active source limits.                                                    |
| Global active source limit maximum      | Configured number of active source messages accepted by the device.                                                         |
| Global active source limit threshold    | Configured threshold for applying random early discard (RED) to drop some but not all MSDP active source messages.          |
| Global active source limit log-warning  | Threshold at which a warning message is logged (percentage of the number of active source messages accepted by the device). |
| Global active source limit log interval | Time (in seconds) between consecutive log messages.                                                                         |
| Peer                                    | Address of peer.                                                                                                            |



Table 259: show msdp statistics Output Fields (*continued*)

| Field Name                          | Field Description                                                                                                                                   |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Last State Change                   | How long ago the peer state changed.                                                                                                                |
| Last message received from the peer | How long ago the last message was received from the peer.                                                                                           |
| RPF Failures                        | Number of reverse path forwarding (RPF) failures.                                                                                                   |
| Remote Closes                       | Number of times the remote peer closed.                                                                                                             |
| Peer Timeouts                       | Number of peer timeouts.                                                                                                                            |
| SA messages sent                    | Number of source-active messages sent.                                                                                                              |
| SA messages received                | Number of source-active messages received.                                                                                                          |
| SA request messages sent            | Number of source-active request messages sent.                                                                                                      |
| SA request messages received        | Number of source-active request messages received.                                                                                                  |
| SA response messages sent           | Number of source-active response messages sent.                                                                                                     |
| SA response messages received       | Number of source-active response messages received.                                                                                                 |
| Active source exceeded              | Number of times this peer has exceeded configured source-active limits.                                                                             |
| Active source Maximum               | Configured number of active source messages accepted by this peer.                                                                                  |
| Active source threshold             | Configured threshold on this peer for applying random early discard (RED) to drop some but not all MSDP active source messages.                     |
| Active source log-warning           | Configured threshold on this peer at which a warning message is logged (percentage of the number of active source messages accepted by the device). |
| Active source log-interval          | Time (in seconds) between consecutive log messages on this peer.                                                                                    |
| Keepalive messages sent             | Number of keepalive messages sent.                                                                                                                  |
| Keepalive messages received         | Number of keepalive messages received.                                                                                                              |
| Unknown messages received           | Number of unknown messages received.                                                                                                                |



Table 259: show msdp statistics Output Fields (*continued*)

| Field Name              | Field Description                  |
|-------------------------|------------------------------------|
| Error messages received | Number of error messages received. |



## Sample Output

**show msdp statistics**

```
user@host> show msdp statistics
Global active source limit exceeded: 0
Global active source limit maximum: 10
Global active source limit threshold: 8
Global active source limit log-warning: 60
Global active source limit log interval: 60

Peer: 10.255.245.39
Last State Change: 11:54:49 (00:24:59)
Last message received from peer: 11:53:32 (00:26:16)
RPF Failures: 0
Remote Closes: 0
Peer Timeouts: 0
SA messages sent: 376
SA messages received: 459
SA request messages sent: 0
SA request messages received: 0
SA response messages sent: 0
SA response messages received: 0
Active source exceeded: 0
Active source Maximum: 10
Active source threshold: 8
Active source log-warning: 60
Active source log-interval: 120
Keepalive messages sent: 17
Keepalive messages received: 19
Unknown messages received: 0
Error messages received: 0
```

**show msdp statistics  
peer**

```
user@host> show msdp statistics peer 10.255.182.140
Peer: 10.255.182.140
Last State Change: 8:19:23 (00:01:08)
Last message received from peer: 8:20:05 (00:00:26)
RPF Failures: 0
Remote Closes: 0
Peer Timeouts: 0
SA messages sent: 17
SA messages received: 16
SA request messages sent: 0
SA request messages received: 0
SA response messages sent: 0
SA response messages received: 0
Active source exceeded: 20
Active source Maximum: 10
Active source threshold: 8
Active source log-warning: 60
Active source log-interval: 120
Keepalive messages sent: 0
Keepalive messages received: 0
Unknown messages received: 0
Error messages received: 0
```



## show multicast flow-map

|                                                     |                                                                                                                                                                                                                                                                                                                                          |
|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | show multicast flow-map<br><brief   detail><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                      |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | show multicast flow-map<br><brief   detail>                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>                          | Command introduced in Junos OS Release 8.2.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                     |
| <b>Description</b>                                  | Display configuration information about IP multicast flow maps.                                                                                                                                                                                                                                                                          |
| <b>Options</b>                                      | <b>none</b> —Display configuration information about IP multicast flow maps on all systems.<br><br><b>brief   detail</b> —(Optional) Display the specified level of output.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                                                                                                                                     |
| <b>List of Sample Output</b>                        | <a href="#">show multicast flow-map on page 3992</a><br><a href="#">show multicast flow-map detail on page 3992</a>                                                                                                                                                                                                                      |
| <b>Output Fields</b>                                | <a href="#">Table 260 on page 3991</a> describes the output fields for the <b>show multicast flow-map</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                               |

**Table 260: show multicast flow-map Output Fields**

| Field Name                | Field Description                                         | Levels of Output |
|---------------------------|-----------------------------------------------------------|------------------|
| <b>Name</b>               | Name of the flow map.                                     | All levels       |
| <b>Policy</b>             | Name of the policy associated with the flow map.          | All levels       |
| <b>Cache-timeout</b>      | Cache timeout value assigned to the flow map.             | All levels       |
| <b>Bandwidth</b>          | Bandwidth setting associated with the flow map.           | All levels       |
| <b>Adaptive</b>           | Whether or not adaptive mode is enabled for the flow map. | none             |
| <b>Flow-map</b>           | Name of the flow map.                                     | <b>detail</b>    |
| <b>Adaptive Bandwidth</b> | Whether or not adaptive mode is enabled for the flow map. | <b>detail</b>    |
| <b>Redundant Sources</b>  | Redundant sources defined for the same destination group. | <b>detail</b>    |



## Sample Output

**show multicast  
flow-map**

```
user@host> show multicast flow-map
Instance: master
Name      Policy      Cache timeout      Bandwidth Adaptive
map2      policy2      never              2000000 no
map1      policy1      60 seconds        2000000 no
```

## Sample Output

**show multicast  
flow-map detail**

```
user@host> show multicast flow-map detail
Instance: master
Flow-map: map1
  Policy:      policy1
  Cache Timeout: 600 seconds
  Bandwidth:   2000000
  Adaptive Bandwidth: yes
  Redundant Sources: 11.11.11.11
  Redundant Sources: 11.11.11.12
  Redundant Sources: 11.11.11.13
```



## show multicast interface

|                                                     |                                                                                                                                                                                                                                  |
|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | show multicast interface<br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                 |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | show multicast interface                                                                                                                                                                                                         |
| <b>Release Information</b>                          | Command introduced in Junos OS Release 8.3.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                             |
| <b>Description</b>                                  | Display bandwidth information about IP multicast interfaces.                                                                                                                                                                     |
| <b>Options</b>                                      | <b>none</b> —Display all interfaces that have multicast configured.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                             |
| <b>List of Sample Output</b>                        | <a href="#">show multicast interface on page 3994</a>                                                                                                                                                                            |
| <b>Output Fields</b>                                | <a href="#">Table 261 on page 3993</a> describes the output fields for the <b>show multicast interface</b> command. Output fields are listed in the approximate order in which they appear.                                      |

**Table 261: show multicast interface Output Fields**

| Field Name                              | Field Description                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Interface</b>                        | Name of the multicast interface.                                                                                                                                                                                                                                                                                                                                   |
| <b>Maximum bandwidth (bps)</b>          | Maximum bandwidth setting, in bits per second, for this interface.                                                                                                                                                                                                                                                                                                 |
| <b>Remaining bandwidth (bps)</b>        | Amount of bandwidth, in bits per second, remaining on the interface.                                                                                                                                                                                                                                                                                               |
| <b>Mapped bandwidth deduction (bps)</b> | <p>Amount of bandwidth, in bits per second, used by any flows that are mapped to the interface.</p> <p><b>NOTE:</b> Adding the mapped bandwidth deduction value to the local bandwidth deduction value results in the total deduction value for the interface.</p> <p>This field does not appear in the output when the no QoS adjustment feature is disabled.</p> |



Table 261: show multicast interface Output Fields (*continued*)

| Field Name                                   | Field Description                                                                                                                                                                                                                                                                                                                                                          |
|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Local bandwidth deduction (bps)</b>       | <p>Amount of bandwidth, in bits per second, used by any mapped flows that are traversing the interface.</p> <p><b>NOTE:</b> Adding the mapped bandwidth deduction value to the local bandwidth deduction value results in the total deduction value for the interface.</p> <p>This field does not appear in the output when the no QoS adjustment feature is disabled.</p> |
| <b>Reverse OIF mapping</b>                   | <p>State of the reverse OIF mapping feature (<b>on</b> or <b>off</b>).</p> <p><b>NOTE:</b> This field does not appear in the output when the no QoS adjustment feature is disabled.</p>                                                                                                                                                                                    |
| <b>Reverse OIF mapping no QoS adjustment</b> | <p>State of the no QoS adjustment feature (<b>on</b> or <b>off</b>) for interfaces that are using reverse OIF mapping.</p> <p><b>NOTE:</b> This field does not appear in the output when the no QoS adjustment feature is disabled.</p>                                                                                                                                    |
| <b>Leave timer</b>                           | <p>Amount of time a mapped interface remains active after the last mapping ends.</p> <p><b>NOTE:</b> This field does not appear in the output when the no QoS adjustment feature is disabled.</p>                                                                                                                                                                          |
| <b>No QoS adjustment</b>                     | <p>State (<b>on</b>) of the no QoS adjustment feature when this feature is enabled.</p> <p><b>NOTE:</b> This field does not appear in the output when the no QoS adjustment feature is disabled.</p>                                                                                                                                                                       |

## Sample Output

### show multicast interface

```

user@host> show multicast interface
Interface           Maximum bandwidth (bps) Remaining bandwidth (bps)
fe-0/0/3             100000000                0
fe-0/0/3.210         100000000               -20000000
fe-0/0/3.220         100000000              100000000
fe-0/0/3.230         200000000              180000000
fe-0/0/2.200         100000000              100000000

```



## show multicast minfo

|                                 |                                                                                                                                                                                                                           |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show multicast minfo</code><br><code>&lt;host&gt;</code>                                                                                                                                                            |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                  |
| <b>Description</b>              | Display configuration information about IP multicast networks, including neighboring multicast router addresses.                                                                                                          |
| <b>Options</b>                  | <b>none</b> —Display configuration information about all multicast networks.<br><br><b>host</b> —(Optional) Display configuration information about a particular host. Replace <i>host</i> with a hostname or IP address. |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                      |
| <b>List of Sample Output</b>    | <a href="#">show multicast minfo on page 3996</a>                                                                                                                                                                         |
| <b>Output Fields</b>            | <a href="#">Table 262 on page 3995</a> describes the output fields for the <b>show multicast minfo</b> command. Output fields are listed in the approximate order in which they appear.                                   |

Table 262: show multicast minfo Output Fields

| Field Name                           | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>source-address</i>                | Query address, hostname (DNS name or IP address of the source address), and multicast protocol version or the software version of another vendor.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <i>ip-address-1—&gt;ip-address-2</i> | Queried router interface address and directly attached neighbor interface address, respectively.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <i>(name or ip-address)</i>          | Name or IP address of neighbor.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <i>[metric/threshold/type/flags]</i> | Neighbor's multicast profile: <ul style="list-style-type: none"> <li><b>metric</b>—Always has a value of 1, because <b>minfo</b> queries the directly connected interfaces of a device.</li> <li><b>threshold</b>—Multicast threshold time-to-live (TTL). The range of values is 0 through 255.</li> <li><b>type</b>—Multicast connection type: <b>pim</b> or <b>tunnel</b>.</li> <li><b>flags</b>—Flags for this route: <ul style="list-style-type: none"> <li><b>querier</b>—Queried router is the designated router for the neighboring session.</li> <li><b>leaf</b>—Link is a leaf in the multicast network.</li> <li><b>down</b>—Link status indicator.</li> </ul> </li> </ul> |



## Sample Output

```
show multicast mrinfo  user@host> show multicast mrinfo 10.35.4.1
10.35.4.1 (10.35.4.1) [version 12.0]:
  192.168.195.166 -> 0.0.0.0 (local) [1/0/pim/querier/leaf]
  10.38.20.1 -> 0.0.0.0 (local) [1/0/pim/querier/leaf]
  10.47.1.1 -> 10.47.1.2 (10.47.1.2) [1/5/pim]
  0.0.0.0 -> 0.0.0.0 (local) [1/0/pim/down]
```



## show multicast next-hops

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | <pre>show multicast next-hops &lt;brief   detail&gt; &lt;identifier-number&gt; &lt;inet   inet6&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | <pre>show multicast next-hops &lt;brief   detail&gt; &lt;identifier-number&gt; &lt;inet   inet6&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>                          | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>inet6</b> option introduced in Junos OS Release 10.0 for EX Series switches.</p> <p><b>detail</b> option display of next-hop ID number introduced in Junos OS Release 11.1 for M Series and T Series routers and EX Series switches.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Support for bidirectional PIM added in Junos OS Release 12.1.</p>                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>                                  | Display the entries in the IP multicast next-hop table.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>                                      | <p><b>none</b>—Display standard information about all entries in the multicast next-hop table for all supported address families.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p>When you include the <b>detail</b> option on M Series and T Series routers and EX Series switches, the downstream interface name includes the next-hop ID number in parentheses, in the form <b>fe-0/1/2.0-(1048574)</b> where <b>1048574</b> is the next-hop ID number.</p> <p><b>identifier-number</b>—(Optional) Show a particular next hop by ID number. The range of values is 1 through <b>65,535</b>.</p> <p><b>inet   inet6</b>—(Optional) Display entries for IPv4 or IPv6 family addresses, respectively.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>List of Sample Output</b>                        | <p><a href="#">show multicast next-hops on page 3999</a></p> <p><a href="#">show multicast next-hops (Bidirectional PIM on page 3999</a></p> <p><a href="#">show multicast next-hops brief on page 3999</a></p> <p><a href="#">show multicast next-hops detail on page 3999</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Output Fields</b>                                | <p><a href="#">Table 263 on page 3998</a> describes the output fields for the <b>show multicast next-hops</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |



**Table 263: show multicast next-hops Output Fields**

| Field Name                     | Field Description                                                                                                                                      |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Family</b>                  | Protocol family (such as <b>INET</b> ).                                                                                                                |
| <b>ID</b>                      | Next-hop identifier of the prefix. The identifier is returned by the routing device's Packet Forwarding Engine.                                        |
| <b>RefCount</b>                | Number of cache entries that are using this next hop.                                                                                                  |
| <b>KRefCount</b>               | Kernel reference count for the next hop.                                                                                                               |
| <b>Downstream interface</b>    | Interface names associated with each multicast next-hop ID.                                                                                            |
| <b>Incoming interface list</b> | List of interfaces that accept incoming traffic. Only shown for routes that do not use strict RPF-based forwarding, for example for bidirectional PIM. |



## Sample Output

### show multicast next-hops

```
user@host> show multicast next-hops
Family: INET
ID      Refcount  KRefCount Downstream interface
262142      4          2 so-1/0/0.0
262143      2          1 mt-1/1/0.49152
262148      2          1 mt-1/1/0.32769
```

### show multicast next-hops (Bidirectional PIM)

```
user@host> show multicast next-hops
Family: INET
ID      Refcount  KRefCount Downstream interface
2097151      8          4 ge-0/0/1.0

Family: INET6
ID      Refcount  KRefCount Downstream interface
2097157      2          1 ge-0/0/1.0

Family: Incoming interface list
ID      Refcount  KRefCount Downstream interface
513      5          2 lo0.0
           ge-0/0/1.0
514      5          2 lo0.0
           ge-0/0/1.0
           xe-4/1/0.0
515      3          1 lo0.0
           ge-0/0/1.0
           xe-4/1/0.0
544      1          0 lo0.0
           xe-4/1/0.0
```

### show multicast next-hops brief

The output for the **show multicast next-hops brief** command is identical to that for the **show multicast next-hops** command. For sample output, see [show multicast next-hops on page 3999](#).

### show multicast next-hops detail

```
user@host> show multicast next-hops detail
Family: INET
ID      Refcount  KRefCount Downstream interface
1048577      2          1 fe-0/1/2.0-(1048574)
           ge-0/2/3.0-(1048576)
```



## show multicast pim-to-igmp-proxy

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | show multicast pim-to-igmp-proxy<br><instance <i>instance-name</i> ><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                                                        |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | show multicast pim-to-igmp-proxy<br><instance <i>instance-name</i> >                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>                          | Command introduced in Junos OS Release 9.6.<br>Command introduced in Junos OS Release 9.6 for EX Series switches.<br><b>instance</b> option introduced in Junos OS Release 10.3.<br><b>instance</b> option introduced in Junos OS Release 10.3 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                           |
| <b>Description</b>                                  | Display configuration information about PIM-to-IGMP message translation, also known as PIM-to-IGMP proxy.                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                                      | <p><b>none</b>—Display configuration information about PIM-to-IGMP message translation for all routing instances.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display configuration information about PIM-to-IGMP message translation for a specific multicast instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>                        | <ul style="list-style-type: none"> <li>Configuring PIM-to-IGMP and PIM-to-MLD Message Translation</li> </ul>                                                                                                                                                                                                                                                                                                                                        |
| <b>List of Sample Output</b>                        | <a href="#">show multicast pim-to-igmp-proxy on page 4001</a><br><a href="#">show multicast pim-to-igmp-proxy instance on page 4001</a>                                                                                                                                                                                                                                                                                                             |
| <b>Output Fields</b>                                | <a href="#">Table 264 on page 4000</a> describes the output fields for the <b>show multicast pim-to-igmp-proxy</b> command. Output fields are listed in the order in which they appear.                                                                                                                                                                                                                                                             |

**Table 264: show multicast pim-to-igmp-proxy Output Fields**

| Field Name                   | Field Description                                                                                                                                     |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Instance</b>              | Routing instance. Default instance is <b>master</b> (inet.0 routing table).                                                                           |
| <b>Proxy state</b>           | State of PIM-to-IGMP message translation, also known as PIM-to-IGMP proxy, on the configured upstream interfaces: <b>enabled</b> or <b>disabled</b> . |
| <b><i>interface-name</i></b> | Name of upstream interface (no more than two allowed) on which PIM-to-IGMP message translation is configured.                                         |



## Sample Output

**show multicast  
pim-to-igmp-proxy**

```
user@host> show multicast pim-to-igmp-proxy
Instance: master Proxy state: enabled
ge-0/1/0.1
ge-0/1/0.2
```

**show multicast  
pim-to-igmp-proxy  
instance**

```
user@host> show multicast pim-to-igmp-proxy instance VPN-A
Instance: VPN-A Proxy state: enabled
ge-0/1/0.1
```



## show multicast pim-to-mld-proxy

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | show multicast pim-to-mld-proxy<br><instance <i>instance-name</i> ><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                                                   |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | show multicast pim-to-mld-proxy<br><instance <i>instance-name</i> >                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>                          | Command introduced in Junos OS Release 9.6.<br>Command introduced in Junos OS Release 9.6 for EX Series switches.<br><b>instance</b> option introduced in Junos OS Release 10.3.<br><b>instance</b> option introduced in Junos OS Release 10.3 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                     |
| <b>Description</b>                                  | Display configuration information about PIM-to-MLD message translation, also known as PIM-to-MLD proxy.                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                                      | <b>none</b> —Display configuration information about PIM-to-MLD message translation for all routing instances.<br><br><b>instance <i>instance-name</i></b> —(Optional) Display configuration information about PIM-to-MLD message translation for a specific multicast instance.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>List of Sample Output</b>                        | <a href="#">show multicast pim-to-mld-proxy on page 4003</a><br><a href="#">show multicast pim-to-mld-proxy instance on page 4003</a>                                                                                                                                                                                                                                                                                                         |
| <b>Output Fields</b>                                | <a href="#">Table 265 on page 4002</a> describes the output fields for the <b>show multicast pim-to-mld-proxy</b> command. Output fields are listed in the order in which they appear.                                                                                                                                                                                                                                                        |

**Table 265: show multicast pim-to-mld-proxy Output Fields**

| Field Name            | Field Description                                                                                                                                   |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Proxy state           | State of PIM-to-MLD message translation, also known as PIM-to-MLD proxy, on the configured upstream interfaces: <b>enabled</b> or <b>disabled</b> . |
| <i>interface-name</i> | Name of upstream interface (no more than two allowed) on which PIM-to-MLD message translation is configured.                                        |



## Sample Output

`show multicast  
pim-to-mld-proxy`

```
user@host> show multicast pim-to-mld-proxy
Instance: master Proxy state: enabled
ge-0/5/0.1
ge-0/5/0.2
```

`show multicast  
pim-to-mld-proxy  
instance`

```
user@host> show multicast pim-to-mld-proxy instance VPN-A
Instance: VPN-A Proxy state: enabled
ge-0/5/0.1
```



## show multicast route

---

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | <pre>show multicast route &lt;brief   detail   extensive   summary&gt; &lt;active   all   inactive&gt; &lt;group group&gt; &lt;inet   inet6&gt; &lt;instance instance name&gt; &lt;logical-system (all   logical-system-name)&gt; &lt;regular-expression&gt; &lt;source-prefix source-prefix&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | <pre>show multicast route &lt;brief   detail   extensive   summary&gt; &lt;active   all   inactive&gt; &lt;group group&gt; &lt;inet   inet6&gt; &lt;instance instance name&gt; &lt;regular-expression&gt; &lt;source-prefix source-prefix&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>                          | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>inet6</b> and <b>instance</b> options introduced in Junos OS Release 10.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Support for bidirectional PIM added in Junos OS Release 12.1.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>                                  | Display the entries in the IP multicast forwarding table. You can display similar information with the <b>show route table inet.1</b> command.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                                      | <p><b>none</b>—Display standard information about all entries in the multicast forwarding table for all routing instances.</p> <p><b>brief   detail   extensive   summary</b>—(Optional) Display the specified level of output.</p> <p><b>active   all   inactive</b>—(Optional) Display all active entries, all entries, or all inactive entries, respectively, in the multicast forwarding table.</p> <p><b>group group</b>—(Optional) Display the cache entries for a particular group.</p> <p><b>inet   inet6</b>—(Optional) Display multicast forwarding table entries for IPv4 or IPv6 family addresses, respectively.</p> <p><b>instance instance-name</b>—(Optional) Display entries in the multicast forwarding table for a specific multicast instance.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>regular-expression</b>—(Optional) Display information about the multicast forwarding table entries that match a UNIX OS-style regular expression.</p> |



**source-prefix** *source-prefix*—(Optional) Display the cache entries for a particular source prefix.

**Required Privilege Level** view

**List of Sample Output** [show multicast route on page 4007](#)  
[show multicast route \(Bidirectional PIM\) on page 4007](#)  
[show multicast route brief on page 4007](#)  
[show multicast route detail on page 4008](#)  
[show multicast route extensive \(Bidirectional PIM\) on page 4008](#)  
[show multicast route instance <instance-name> on page 4009](#)  
[show multicast route summary on page 4009](#)

**Output Fields** [Table 266 on page 4005](#) describes the output fields for the **show multicast route** command. Output fields are listed in the approximate order in which they appear.

**Table 266: show multicast route Output Fields**

| Field Name                           | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                     | Level of Output         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>family</b>                        | IPv4 address family ( <b>INET</b> ) or IPv6 address family ( <b>INET6</b> ).                                                                                                                                                                                                                                                                                                                                                          | All levels              |
| <b>Group</b>                         | Group address.<br><br>For any-source multicast routes, for example for bidirectional PIM, the group address includes the prefix length.                                                                                                                                                                                                                                                                                               | All levels              |
| <b>Source</b>                        | Prefix and length of the source as it is in the multicast forwarding table.                                                                                                                                                                                                                                                                                                                                                           | All levels              |
| <b>Incoming interface list</b>       | List of interfaces that accept incoming traffic. Only shown for routes that do not use strict RPF-based forwarding, for example for bidirectional PIM.                                                                                                                                                                                                                                                                                | All levels              |
| <b>Upstream interface</b>            | Name of the interface on which the packet with this source prefix is expected to arrive.                                                                                                                                                                                                                                                                                                                                              | All levels              |
| <b>Downstream interface list</b>     | List of interface names to which the packet with this source prefix is forwarded.                                                                                                                                                                                                                                                                                                                                                     | All levels              |
| <b>Number of outgoing interfaces</b> | Total number of outgoing interfaces for each (S,G) entry.                                                                                                                                                                                                                                                                                                                                                                             | <b>extensive</b>        |
| <b>Session description</b>           | Name of the multicast session.                                                                                                                                                                                                                                                                                                                                                                                                        | <b>detail extensive</b> |
| <b>Statistics</b>                    | Rate at which packets are being forwarded for this source and group entry (in Kbps and pps), and number of packets that have been forwarded to this prefix. If one or more of the kilobits per second packet forwarding statistic queries fails or times out, the statistics field displays <b>Forwarding statistics are not available</b> .<br><br><b>NOTE:</b> On QFX Series switches, this field does not report valid statistics. | <b>detail extensive</b> |
| <b>Next-hop ID</b>                   | Next-hop identifier of the prefix. The identifier is returned by the routing device's Packet Forwarding Engine and is also displayed in the output of the <b>show multicast nexthops</b> command.                                                                                                                                                                                                                                     | <b>detail extensive</b> |



Table 266: show multicast route Output Fields (*continued*)

| Field Name                                    | Field Description                                                                                                                                                                                                                | Level of Output          |
|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| <b>Incoming interface list ID</b>             | For bidirectional PIM, incoming interface list identifier.<br><br>Identifiers for interfaces that accept incoming traffic. Only shown for routes that do not use strict RPF-based forwarding, for example for bidirectional PIM. | <b>detail extensive</b>  |
| <b>Upstream protocol</b>                      | Protocol running on the interface on which the packet with this source prefix is expected to arrive.                                                                                                                             | <b>detail extensive</b>  |
| <b>Route type</b>                             | Type of multicast route. Values can be (S,G) or (*,G).                                                                                                                                                                           | <b>summary</b>           |
| <b>Route state</b>                            | Whether the group is <b>Active</b> or <b>Inactive</b> .                                                                                                                                                                          | <b>summary extensive</b> |
| <b>Route count</b>                            | Number of multicast routes.                                                                                                                                                                                                      | <b>summary</b>           |
| <b>Forwarding state</b>                       | Whether the prefix is pruned or forwarding.                                                                                                                                                                                      | <b>extensive</b>         |
| <b>Cache lifetime/timeout</b>                 | Number of seconds until the prefix is removed from the multicast forwarding table. A value of <b>never</b> indicates a permanent forwarding entry. A value of <b>forever</b> indicates routes that do not have keepalive times.  | <b>extensive</b>         |
| <b>Wrong incoming interface notifications</b> | Number of times that the upstream interface was not available.                                                                                                                                                                   | <b>extensive</b>         |
| <b>Uptime</b>                                 | Time since the creation of a multicast route.                                                                                                                                                                                    | <b>extensive</b>         |



## Sample Output

```

show multicast route  user@host> show multicast route
Family: INET

Group: 228.0.0.0
  Source: 10.255.14.144/32
  Upstream interface: local
  Downstream interface list:
    so-1/0/0.0

Group: 239.1.1.1
  Source: 10.255.14.144/32
  Upstream interface: local
  Downstream interface list:
    so-1/0/0.0

Group: 239.1.1.1
  Source: 10.255.70.15/32
  Upstream interface: so-1/0/0.0
  Downstream interface list:
    mt-1/1/0.49152

Family: INET6

```

```

show multicast route  user@host> show multicast route
(Bidirectional PIM)  Family: INET

Group: 224.1.1.0/24
  Source: *
  Incoming interface list:
    lo0.0 ge-0/0/1.0
  Downstream interface list:
    ge-0/0/1.0

Group: 224.1.3.0/24
  Source: *
  Incoming interface list:
    lo0.0 ge-0/0/1.0 xe-4/1/0.0
  Downstream interface list:
    ge-0/0/1.0

Group: 225.1.1.0/24
  Source: *
  Incoming interface list:
    lo0.0 ge-0/0/1.0
  Downstream interface list:
    ge-0/0/1.0

Group: 225.1.3.0/24
  Source: *
  Incoming interface list:
    lo0.0 ge-0/0/1.0 xe-4/1/0.0
  Downstream interface list:
    ge-0/0/1.0

Family: INET6

```

The output for the **show multicast route brief** command is identical to that for the **show**



**show multicast route  
brief**

**multicast route** command. For sample output, see [show multicast route on page 4007](#) or [show multicast route \(Bidirectional PIM\) on page 4007](#).

**show multicast route  
detail**

```
user@host> show multicast route detail
Family: INET

Group: 228.0.0.0
  Source: 10.255.14.144/32
  Upstream interface: local
  Downstream interface list:
    so-1/0/0.0
  Session description: Unknown
  Statistics: 8 kbps, 100 pps, 45272 packets
  Next-hop ID: 262142
  Upstream protocol: PIM

Group: 239.1.1.1
  Source: 10.255.14.144/32
  Upstream interface: local
  Downstream interface list:
    so-1/0/0.0
  Session description: Administratively Scoped
  Statistics: 0 kbps, 0 pps, 13404 packets
  Next-hop ID: 262142
  Upstream protocol: PIM

Group: 239.1.1.1
  Source: 10.255.70.15/32
  Upstream interface: so-1/0/0.0
  Downstream interface list:
    mt-1/1/0.49152
  Session description: Administratively Scoped
  Statistics: 46 kbps, 1000 pps, 921077 packets

  Next-hop ID: 262143
  Upstream protocol: PIM

Family: INET6
```

**show multicast route  
extensive  
(Bidirectional PIM)**

```
user@host> show multicast route extensive
Family: INET

Group: 224.1.1.0/24
  Source: *
  Incoming interface list:
    lo0.0 ge-0/0/1.0
  Downstream interface list:
    ge-0/0/1.0
  Number of outgoing interfaces: 1
  Session description: NOB Cross media facilities
  Statistics: 0 kbps, 0 pps, 0 packets
  Next-hop ID: 2097153
  Incoming interface list ID: 585
  Upstream protocol: PIM
  Route state: Active
  Forwarding state: Forwarding
  Cache lifetime/timeout: forever
  Wrong incoming interface notifications: 0
```



```

Group: 224.1.3.0/24
Source: *
Incoming interface list:
  lo0.0 ge-0/0/1.0 xe-4/1/0.0
Downstream interface list:
  ge-0/0/1.0
Number of outgoing interfaces: 1
Session description: NOB Cross media facilities
Statistics: 0 kbps, 0 pps, 0 packets
Next-hop ID: 2097153
Incoming interface list ID: 589
Upstream protocol: PIM
Route state: Active
Forwarding state: Forwarding
Cache lifetime/timeout: forever
Wrong incoming interface notifications: 0

Family: INET6

```

**show multicast route  
instance  
<instance-name>**

```

user@host> show multicast route instance v1 extensive
Instance: v1 Family: INET

Group: 224.1.1.1
Source: (null)/0
Upstream interface: fe-1/3/0.111
Downstream interface list:
  lt-0/3/0.42 lt-0/3/0.46 lt-0/3/0.43
Number of outgoing interfaces: 3

Group: 224.1.1.2
Source: (null)/0
Upstream interface: fe-1/3/0.111
Downstream interface list:
  lt-0/3/0.42 lt-0/3/0.46 lt-0/3/0.43
Number of outgoing interfaces: 3

Group: 224.1.1.3
Source: (null)/0
Upstream interface: fe-1/3/0.111
Downstream interface list:
  lt-0/3/0.42 lt-0/3/0.46 lt-0/3/0.43
Number of outgoing interfaces: 3

Instance: v1 Family: INET6

```

**show multicast route  
summary**

```

user@host> show multicast route summary
Instance: master Family: INET

Route type   Route state   Route count
(S,G)        Active        2
(S,G)        Inactive      3

Instance: master Family: INET6

```



## show multicast rpf

---

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | <code>show multicast rpf</code><br><code>&lt;inet   inet6&gt;</code><br><code>&lt;instance <i>instance-name</i>&gt;</code><br><code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code><br><code>&lt;prefix&gt;</code><br><code>&lt;summary&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | <code>show multicast rpf</code><br><code>&lt;inet   inet6&gt;</code><br><code>&lt;instance <i>instance-name</i>&gt;</code><br><code>&lt;prefix&gt;</code><br><code>&lt;summary&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>inet6</b> and <b>instance</b> options introduced in Junos OS Release 10.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>                                  | Display information about multicast reverse-path-forwarding (RPF) calculations.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                                      | <b>none</b> —Display RPF calculation information for all supported address families.<br><br><b>inet   inet6</b> —(Optional) Display the RPF calculation information for IPv4 or IPv6 family addresses, respectively.<br><br><b>instance <i>instance-name</i></b> —(Optional) Display information about multicast RPF calculations for a specific multicast instance.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.<br><br><b>prefix</b> —(Optional) Display the RPF calculation information for the specified prefix.<br><br><b>summary</b> —(Optional) Display a summary of all multicast RPF information. |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>List of Sample Output</b>                        | <a href="#">show multicast rpf on page 4012</a><br><a href="#">show multicast rpf inet6 on page 4012</a><br><a href="#">show multicast rpf prefix on page 4013</a><br><a href="#">show multicast rpf summary on page 4013</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |



**Output Fields** Table 267 on page 4011 describes the output fields for the **show multicast rpf** command. Output fields are listed in the approximate order in which they appear.

**Table 267: show multicast rpf Output Fields**

| Field Name    | Field Description                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Instance      | Name of the routing instance. (Displayed when multicast is configured within a routing instance.)                                                                                                                                                                                                                                                                                                             |
| Source prefix | Prefix and length of the source as it exists in the multicast forwarding table.                                                                                                                                                                                                                                                                                                                               |
| Protocol      | How the route was learned.                                                                                                                                                                                                                                                                                                                                                                                    |
| Interface     | Upstream RPF interface.<br><br><b>NOTE:</b> The displayed interface information does not apply to bidirectional PIM RP addresses. This is because the <b>show multicast rpf</b> command does not take into account equal-cost paths or the designated forwarder. For accurate upstream RPF interface information, always use the <b>show pim join extensive</b> command when bidirectional PIM is configured. |
| Neighbor      | Upstream RPF neighbor.<br><br><b>NOTE:</b> The displayed neighbor information does not apply to bidirectional PIM. This is because the <b>show multicast rpf</b> command does not take into account equal-cost paths or the designated forwarder. For accurate upstream RPF neighbor information, always use the <b>show pim join extensive</b> command when bidirectional PIM is configured.                 |



## Sample Output

```
show multicast rpf      user@host> show multicast rpf

Multicast RPF table: inet.0, 12 entries

0.0.0.0/0
  Protocol: Static

10.255.14.132/32
  Protocol: Direct
  Interface: lo0.0

10.255.245.91/32
  Protocol: IS-IS
  Interface: so-1/1/1.0
  Neighbor: 192.168.195.21

127.0.0.1/32
Inactive172.16.0.0/12
  Protocol: Static
  Interface: fxp0.0
  Neighbor: 192.168.14.254

192.168.0.0/16
  Protocol: Static
  Interface: fxp0.0
  Neighbor: 192.168.14.254

192.168.14.0/24
  Protocol: Direct
  Interface: fxp0.0

192.168.14.132/32
  Protocol: Local

192.168.195.20/30
  Protocol: Direct
  Interface: so-1/1/1.0

192.168.195.22/32
  Protocol: Local

192.168.195.36/30
  Protocol: IS-IS
  Interface: so-1/1/1.0
  Neighbor: 192.168.195.21

show multicast rpf     user@host> show multicast rpf inet6
inet6

Multicast RPF table: inet6.0, 12 entries

::10.255.14.132/128
  Protocol: Direct
  Interface: lo0.0

::10.255.245.91/128
  Protocol: IS-IS
```



```
Interface: so-1/1/1.0
Neighbor: fe80::2a0:a5ff:fe28:2e8c
```

```
::192.168.195.20/126
Protocol: Direct
Interface: so-1/1/1.0
```

```
::192.168.195.22/128
Protocol: Local
```

```
::192.168.195.36/126
Protocol: IS-IS
Interface: so-1/1/1.0
Neighbor: fe80::2a0:a5ff:fe28:2e8c
```

```
::192.168.195.76/126
Protocol: Direct
Interface: fe-2/2/0.0
```

```
::192.168.195.77/128
Protocol: Local
```

```
fe80::/64
Protocol: Direct
Interface: so-1/1/1.0
```

```
fe80::290:69ff:fe0c:993a/128
Protocol: Local
```

```
fe80::2a0:a5ff:fe12:84f/128
Protocol: Direct
Interface: lo0.0
```

```
ff02::2/128
Protocol: PIM
```

```
ff02::d/128
Protocol: PIM
```

#### show multicast rpf prefix

```
user@host> show multicast rpf ff02::/16

Multicast RPF table: inet6.0, 13 entries

ff02::2/128
    Protocol: PIM

ff02::d/128
    Protocol: PIM

...
```

#### show multicast rpf summary

```
user@host> show multicast rpf summary

Multicast RPF table: inet.0, 16 entries
Multicast RPF table: inet6.0, 12 entries
```



## show multicast scope

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | show multicast scope<br><inet   inet6><br><instance <i>instance-name</i> ><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | show multicast scope<br><inet   inet6><br><instance <i>instance-name</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>inet6</b> and <b>instance</b> options introduced in Junos OS Release 10.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                               |
| <b>Description</b>                                  | Display administratively scoped IP multicast information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                                      | <p><b>none</b>—Display standard information about administratively scoped multicast information for all supported address families in all routing instances.</p> <p><b>inet   inet6</b>—(Optional) Display scoped multicast information for IPv4 or IPv6 family addresses, respectively.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display administratively scoped information for a specific multicast instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>List of Sample Output</b>                        | <a href="#">show multicast scope on page 4015</a><br><a href="#">show multicast scope inet on page 4015</a><br><a href="#">show multicast scope inet6 on page 4015</a>                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Output Fields</b>                                | Table 268 on page 4014 describes the output fields for the <b>show multicast scope</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                        |

**Table 268: show multicast scope Output Fields**

| Field Name      | Field Description                                           |
|-----------------|-------------------------------------------------------------|
| Scope name      | Name of the multicast scope.                                |
| Group Prefix    | Range of multicast groups that are scoped.                  |
| Interface       | Interface that is the boundary of the administrative scope. |
| Resolve Rejects | Number of kernel resolve rejects.                           |



## Sample Output

```
show multicast scope user@host> show multicast scope
```

| Scope name | Group Prefix   | Interface  | Resolve<br>Rejects |
|------------|----------------|------------|--------------------|
| 232-net    | 232.232.0.0/16 | fe-0/0/0.1 | 0                  |
| local      | 239.255.0.0/16 | fe-0/0/0.1 | 0                  |
| local      | ff05::/16      | fe-0/0/0.1 | 0                  |
| larry      | ff05::1234/128 | fe-0/0/0.1 | 0                  |

```
show multicast scope user@host> show multicast scope inet
inet
```

| Scope name | Group Prefix   | Interface  | Resolve<br>Rejects |
|------------|----------------|------------|--------------------|
| 232-net    | 232.232.0.0/16 | fe-0/0/0.1 | 0                  |
| local      | 239.255.0.0/16 | fe-0/0/0.1 | 0                  |

```
show multicast scope user@host> show multicast scope inet6
inet6
```

| Scope name | Group Prefix   | Interface  | Resolve<br>Rejects |
|------------|----------------|------------|--------------------|
| local      | ff05::/16      | fe-0/0/0.1 | 0                  |
| larry      | ff05::1234/128 | fe-0/0/0.1 | 0                  |



## show multicast sessions

---

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | show multicast sessions<br><brief   detail   extensive><br><logical-system (all   <i>logical-system-name</i> )><br>< <i>regular-expression</i> >                                                                                                                                                                                                                                                                                                                                                        |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | show multicast sessions<br><brief   detail   extensive><br>< <i>regular-expression</i> >                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>                                  | Display information about announced IP multicast sessions.                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                                      | <b>none</b> —Display standard information about all multicast sessions for all routing instances.<br><br><b>brief   detail   extensive</b> —(Optional) Display the specified level of output.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.<br><br><b><i>regular-expression</i></b> —(Optional) Display information about announced sessions that match a UNIX-style regular expression. |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>List of Sample Output</b>                        | <a href="#">show multicast sessions on page 4017</a><br><a href="#">show multicast sessions <i>regular-expression</i> detail on page 4017</a>                                                                                                                                                                                                                                                                                                                                                           |
| <b>Output Fields</b>                                | <a href="#">Table 269 on page 4016</a> describes the output fields for the <b>show multicast sessions</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                              |

**Table 269: show multicast sessions Output Fields**

| Field Name          | Field Description                               |
|---------------------|-------------------------------------------------|
| <i>session-name</i> | Name of the known announced multicast sessions. |

---



## Sample Output

**show multicast  
sessions**

```
user@host> show multicast sessions
1-Department of Biological Sciences, LSU
...
Monterey Bay - DockCam
Monterey Bay - JettyCam
Monterey Bay - StandCam
Monterey DockCam
Monterey DockCam / ROV cam
...
NASA TV (MPEG-1)
...
UO Broadcast - NASA Videos - 25 Years of Progress
UO Broadcast - NASA Videos - Journey through the Solar System
UO Broadcast - NASA Videos - Life in the Universe
UO Broadcast - NASA Videos - Nasa and the Airplane
UO Broadcasts OPB's Oregon Story
UO DOD News Clips
UO Medical Management of Biological Casualties (1)
UO Medical Management of Biological Casualties (2)
UO Medical Management of Biological Casualties (3)
...
376 active sessions.
```

**show multicast  
sessions**

```
user@host> show multicast sessions "NASA TV" detail
SDP Version: 0  Originated by: -@128.223.83.33
Session: NASA TV (MPEG-1)
```



regular-expression  
detail

Description: NASA television in MPEG-1 format, provided by Private University.  
Please contact the UO if you have problems with this feed.  
Email: Your Name Here <multicast@lists.private.edu>  
Phone: Your Name Here <888/555-1212>  
Bandwidth: AS:1000  
Start time: permanent  
Stop time: none  
Attribute: type:broadcast  
Attribute: tool:IP/TV Content Manager 3.4.14  
Attribute: live:capture:1  
Attribute: x-iptv-capture:mp1s  
Media: video 54302 RTP/AVP 32 31 96 97  
Connection Data: 224.2.231.45 ttl 127  
Attribute: quality:8  
Attribute: framerate:30  
Attribute: rtpmap:96 WBIH/90000  
Attribute: rtpmap:97 MP4V-ES/90000  
Attribute: x-iptv-svr:video 128.223.91.191 live  
Attribute: fmp:32 type=mpeg1  
Media: audio 28848 RTP/AVP 14 0 96 3 5 97 98 99 100 101 102 10 11 103 104 105 106  
Connection Data: 224.2.145.37 ttl 127  
Attribute: rtpmap:96 X-WAVE/8000  
Attribute: rtpmap:97 L8/8000/2  
Attribute: rtpmap:98 L8/8000  
Attribute: rtpmap:99 L8/22050/2  
Attribute: rtpmap:100 L8/22050  
Attribute: rtpmap:101 L8/11025/2  
Attribute: rtpmap:102 L8/11025  
Attribute: rtpmap:103 L16/22050/2  
Attribute: rtpmap:104 L16/22050

1 matching sessions.



## show multicast usage

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | <pre>show multicast usage &lt;brief   detail&gt; &lt;inet   inet6&gt; &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | <pre>show multicast usage &lt;brief   detail&gt; &lt;inet   inet6&gt; &lt;instance <i>instance-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>                          | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>inet6</b> and <b>instance</b> options introduced in Junos OS Release 10.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>                                  | Display usage information about the 10 most active Distance Vector Multicast Routing Protocol (DVMRP) or Protocol Independent Multicast (PIM) groups.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>                                      | <p><b>none</b>—Display multicast usage information for all supported address families for all routing instances.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>inet   inet6</b>—(Optional) Display usage information for IPv4 or IPv6 family addresses, respectively.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display information about the most active DVMRP or PIM groups for a specific multicast instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>List of Sample Output</b>                        | <p><a href="#">show multicast usage on page 4021</a></p> <p><a href="#">show multicast usage brief on page 4021</a></p> <p><a href="#">show multicast usage instance on page 4021</a></p> <p><a href="#">show multicast usage detail on page 4021</a></p>                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Output Fields</b>                                | <p><a href="#">Table 270 on page 4019</a> describes the output fields for the <b>show multicast usage</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                           |

**Table 270: show multicast usage Output Fields**

| Field Name      | Field Description                                                                                 |
|-----------------|---------------------------------------------------------------------------------------------------|
| <b>Instance</b> | Name of the routing instance. (Displayed when multicast is configured within a routing instance.) |



Table 270: show multicast usage Output Fields (*continued*)

| Field Name     | Field Description                                                                                                                                                                        |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Group</b>   | Group address.                                                                                                                                                                           |
| <b>Sources</b> | Number of sources.                                                                                                                                                                       |
| <b>Packets</b> | Number of packets that have been forwarded to this prefix. If one or more of the packets forwarded statistic queries fails or times out, the packets field displays <b>unavailable</b> . |
| <b>Bytes</b>   | Number of bytes that have been forwarded to this prefix. If one or more of the packets forwarded statistic queries fails or times out, the bytes field displays <b>unavailable</b> .     |
| <b>Prefix</b>  | IP address.                                                                                                                                                                              |
| <b>/len</b>    | Prefix length.                                                                                                                                                                           |
| <b>Groups</b>  | Number of multicast groups.                                                                                                                                                              |



## Sample Output

```

show multicast usage user@host> show multicast usage
Group                Sources Packets          Bytes
228.0.0.0            1         52847          4439148
239.1.1.1            2         13450          1125530

Prefix              /len Groups Packets          Bytes
10.255.14.144       /32  2         66254          5561304
10.255.70.15        /32  1          43            3374...
```

**show multicast usage brief** The output for the **show multicast usage brief** command is identical to that for the **show multicast usage** command. For sample output, see [show multicast usage on page 4021](#).

```

show multicast usage user@host> show multicast usage instance VPN-A
instance
Group                Sources Packets          Bytes
224.2.127.254        1         5538           509496
224.0.1.39           1          13             624
224.0.1.40           1          13             624

Prefix              /len Groups Packets          Bytes
192.168.195.34       /32  1         5538           509496
10.255.14.30         /32  1          13             624
10.255.245.91        /32  1          13             624
...
```

```

show multicast usage user@host> show multicast usage detail
detail
Group                Sources Packets          Bytes
228.0.0.0            1         53159          4465356
  Source: 10.255.14.144 /32 Packets: 53159 Bytes: 4465356
239.1.1.1            2         13450          1125530
  Source: 10.255.14.144 /32 Packets: 13407 Bytes: 1122156
  Source: 10.255.70.15  /32 Packets: 43 Bytes: 3374

Prefix              /len Groups Packets          Bytes
10.255.14.144       /32  2         66566          5587512
  Group: 228.0.0.0      Packets: 53159 Bytes: 4465356
  Group: 239.1.1.1      Packets: 13407 Bytes: 1122156
10.255.70.15        /32  1          43            3374
  Group: 239.1.1.1      Packets: 43 Bytes: 3374
```



## show pim bootstrap

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | show pim bootstrap<br><instance <i>instance-name</i> ><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                     |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | show pim bootstrap<br><instance <i>instance-name</i> >                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>instance</b> option introduced in Junos OS Release 10.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                     |
| <b>Description</b>                                  | For sparse mode only, display information about Protocol Independent Multicast (PIM) bootstrap routers.                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                                      | <p><b>none</b>—Display PIM bootstrap router information for all routing instances.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display information about bootstrap routers for a specific PIM-enabled routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>List of Sample Output</b>                        | <a href="#">show pim bootstrap on page 4023</a><br><a href="#">show pim bootstrap instance on page 4023</a>                                                                                                                                                                                                                                                                                        |
| <b>Output Fields</b>                                | Table 271 on page 4022 describes the output fields for the <b>show pim bootstrap</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                              |

**Table 271: show pim bootstrap Output Fields**

| Field Name           | Field Description                                                                               |
|----------------------|-------------------------------------------------------------------------------------------------|
| <b>Instance</b>      | Name of the routing instance.                                                                   |
| <b>BSR</b>           | Bootstrap router.                                                                               |
| <b>Pri</b>           | Priority of the routing device as elected to be the bootstrap router.                           |
| <b>Local address</b> | Local routing device address.                                                                   |
| <b>Pri</b>           | Local routing device address priority to be elected as the bootstrap router.                    |
| <b>State</b>         | Local routing device election state: <b>Candidate</b> , <b>Elected</b> , or <b>Ineligible</b> . |



Table 271: show pim bootstrap Output Fields (*continued*)

| Field Name | Field Description                                                                                    |
|------------|------------------------------------------------------------------------------------------------------|
| Timeout    | How long until the local routing device declares the bootstrap router to be unreachable, in seconds. |

## Sample Output

### show pim bootstrap

```
user@host> show pim bootstrap
Instance: PIM.master
```

| BSR                        | Pri                     | Local address | Pri        | State      | Timeout |
|----------------------------|-------------------------|---------------|------------|------------|---------|
| None                       | 0                       | 10.255.71.46  | 0          | InEligible | 0       |
| feco:1:1:1:1:0:aff:785c 34 | feco:1:1:1:1:0:aff:7c12 | 0             | InEligible | 0          |         |

### show pim bootstrap instance

```
user@host> show pim bootstrap instance VPN-A
Instance: PIM.VPN-A
```

| BSR  | Pri | Local address   | Pri | State      | Timeout |
|------|-----|-----------------|-----|------------|---------|
| None | 0   | 192.168.196.105 | 0   | InEligible | 0       |



## show pim interfaces

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | show pim interfaces<br><inet   inet6><br><instance ( <i>instance-name</i>   all)><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | show pim interfaces<br><inet   inet6><br><instance ( <i>instance-name</i>   all)>                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>inet6</b> and <b>instance</b> options introduced in Junos OS Release 10.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.<br>Support for bidirectional PIM added in Junos OS Release 12.1.<br>Support for the <b>instance all</b> option added in Junos OS Release 12.1.                                                                                                                 |
| <b>Description</b>                                  | Display information about the interfaces on which Protocol Independent Multicast (PIM) is configured.                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                                      | <p><b>none</b>—Display interface information for all family addresses for the main instance.</p> <p><b>inet   inet6</b>—(Optional) Display interface information for IPv4 or IPv6 family addresses, respectively.</p> <p><b>instance (<i>instance-name</i>   all)</b>—(Optional) Display information about interfaces for a specific PIM-enabled routing instance or for all routing instances.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>List of Sample Output</b>                        | <a href="#">show pim interfaces on page 4026</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Output Fields</b>                                | <a href="#">Table 272 on page 4024</a> describes the output fields for the <b>show pim interfaces</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                          |

Table 272: show pim interfaces Output Fields

| Field Name      | Field Description                                                                          |
|-----------------|--------------------------------------------------------------------------------------------|
| <b>Instance</b> | Name of the routing instance.                                                              |
| <b>Name</b>     | Interface name.                                                                            |
| <b>State</b>    | State of the interface. The state also is displayed in the <b>show interfaces</b> command. |



Table 272: show pim interfaces Output Fields (*continued*)

| Field Name          | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Mode</b>         | <p>PIM mode running on the interface:</p> <ul style="list-style-type: none"> <li>• <b>B</b>—In bidirectional mode, multicast groups are carried across the network over bidirectional shared trees. This type of tree minimizes PIM routing state, which is especially important in networks with numerous and dispersed senders and receivers.</li> <li>• <b>S</b>—In sparse mode, routing devices must join and leave multicast groups explicitly. Upstream routing devices do not forward multicast traffic to this routing device unless this device has sent an explicit request (using a join message) to receive multicast traffic.</li> <li>• <b>Dense</b>—Unlike sparse mode, where data is forwarded only to routing devices sending an explicit request, dense mode implements a flood-and-prune mechanism, similar to DVMRP (the first multicast protocol used to support the multicast backbone). (Not supported on QFX Series.)</li> <li>• <b>Sparse-Dense</b>—Sparse-dense mode allows the interface to operate on a per-group basis in either sparse or dense mode. A group specified as <b>dense</b> is not mapped to a rendezvous point (RP). Instead, data packets destined for that group are forwarded using PIM-Dense Mode (PIM-DM) rules. A group specified as <b>sparse</b> is mapped to an RP, and data packets are forwarded using PIM-Sparse Mode (PIM-SM) rules. (Not supported on QFX Series.)</li> </ul> <p>When sparse-dense mode is configured, the output includes both <b>S</b> and <b>D</b>. When bidirectional-sparse mode is configured, the output includes <b>S</b> and <b>B</b>. When bidirectional-sparse-dense mode is configured, the output includes <b>B</b>, <b>S</b>, and <b>D</b>.</p> |
| <b>IP</b>           | Version number of the address family on the interface: <b>4</b> (IPv4) or <b>6</b> (IPv6).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>V</b>            | PIM version running on the interface: 1 or 2.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>State</b>        | <p>State of PIM on the interface:</p> <ul style="list-style-type: none"> <li>• <b>Active</b>—Bidirectional mode is enabled on the interface and on all PIM neighbors.</li> <li>• <b>DR</b>—Designated router.</li> <li>• <b>NotCap</b>—Bidirectional mode is not enabled on the interface. This can happen when bidirectional PIM is not configured locally, when one of the neighbors is not configured for bidirectional PIM, or when one of the neighbors has not implemented the bidirectional PIM protocol.</li> <li>• <b>NotDR</b>—Not the designated router.</li> <li>• <b>P2P</b>—Point to point.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>NbrCnt</b>       | Number of neighbors that have been seen on the interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>JoinCnt(sg)</b>  | Number of (s,g) join messages that have been seen on the interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>JointCnt(*g)</b> | Number of (*g) join messages that have been seen on the interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>DR address</b>   | Address of the designated router.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |



## Sample Output

### show pim interfaces

```
user@host> show pim interfaces
```

Stat = Status, V = Version, NbrCnt = Neighbor Count,

S = Sparse, D = Dense, B = Bidirectional,

DR = Designated Router, P2P = Point-to-point link,

Active = Bidirectional is active, NotCap = Not Bidirectional Capable

| Name           | Stat | Mode | IP | V | State        | NbrCnt | JoinCnt(sg/*g) | DR address |
|----------------|------|------|----|---|--------------|--------|----------------|------------|
| ge-0/3/0.0     | Up   | S    | 4  | 2 | NotDR,NotCap | 1      | 0/0            | 40.0.0.3   |
| ge-0/3/3.50    | Up   | S    | 4  | 2 | DR,NotCap    | 1      | 9901/100       | 50.0.0.2   |
| ge-0/3/3.51    | Up   | S    | 4  | 2 | DR,NotCap    | 1      | 0/0            | 51.0.0.2   |
| pe-1/2/0.32769 | Up   | S    | 4  | 2 | P2P,NotCap   | 0      | 0/0            |            |



## show pim join

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | <pre>show pim join &lt;brief   detail   extensive   summary&gt; &lt;inet   inet6&gt; &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;range&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | <pre>show pim join &lt;brief   detail   extensive   summary&gt; &lt;inet   inet6&gt; &lt;instance <i>instance-name</i>&gt; &lt;range&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>                          | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>summary</b> option introduced in Junos OS Release 9.6.</p> <p><b>inet6</b> and <b>instance</b> options introduced in Junos OS Release 10.0 for EX Series switches.</p> <p>Support for bidirectional PIM added in Junos OS Release 12.1.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>                                  | <p>Display information about Protocol Independent Multicast (PIM) groups for all PIM modes.</p> <p>For bidirectional PIM, display information about PIM group ranges (*G-range) for each active bidirectional RP group range, in addition to each of the joined (*G) routes.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                                      | <p><b>none</b>—Display the standard information about PIM groups for all supported family addresses for all routing instances.</p> <p><b>brief   detail   extensive   summary</b>—(Optional) Display the specified level of output.</p> <p><b>inet   inet6</b>—(Optional) Display PIM group information for IPv4 or IPv6 family addresses, respectively.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display information about groups for the specified PIM-enabled routing instance only.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>range</b>—(Optional) Address range of the group, specified as <i>prefix/prefix-length</i>.</p> |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>                        | <ul style="list-style-type: none"> <li>• <a href="#">clear pim join on page 3941</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>List of Sample Output</b>                        | <p><a href="#">show pim join summary on page 4031</a></p> <p><a href="#">show pim join (PIM Sparse Mode) on page 4031</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |



[show pim join \(Bidirectional PIM\) on page 4031](#)  
[show pim join instance <instance-name> on page 4032](#)  
[show pim join detail on page 4032](#)  
[show pim join extensive \(PIM Sparse Mode\) on page 4032](#)  
[show pim join extensive \(Bidirectional PIM\) on page 4033](#)  
[show pim join extensive \(Bidirectional PIM with a Directly Connected Phantom RP\) on page 4034](#)  
[show pim join instance <instance-name> extensive on page 4035](#)

**Output Fields** Table 273 on page 4028 describes the output fields for the **show pim join** command. Output fields are listed in the approximate order in which they appear.

**Table 273: show pim join Output Fields**

| Field Name                               | Field Description                                                                                                                                      | Level of Output                            |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
| <b>Instance</b>                          | Name of the routing instance.                                                                                                                          | <b>brief detail extensive summary none</b> |
| <b>Family</b>                            | Name of the address family: <b>inet</b> (IPv4) or <b>inet6</b> (IPv6).                                                                                 | <b>brief detail extensive summary none</b> |
| <b>Route type</b>                        | Type of multicast route: (S,G) or (*,G).                                                                                                               | <b>summary</b>                             |
| <b>Route count</b>                       | Number of (S,G) routes and number of (*,G) routes.                                                                                                     | <b>summary</b>                             |
| <b>R</b>                                 | Rendezvous Point Tree.                                                                                                                                 | <b>brief detail extensive none</b>         |
| <b>S</b>                                 | Sparse.                                                                                                                                                | <b>brief detail extensive none</b>         |
| <b>W</b>                                 | Wildcard.                                                                                                                                              | <b>brief detail extensive none</b>         |
| <b>Group</b>                             | Group address.                                                                                                                                         | <b>brief detail extensive none</b>         |
| <b>Bidirectional group prefix length</b> | For bidirectional PIM, length of the IP prefix for RP group ranges.                                                                                    | All levels                                 |
| <b>Source</b>                            | Multicast source: <ul style="list-style-type: none"> <li>• * (wildcard value)</li> <li>• <i>ipv4-address</i></li> <li>• <i>ipv6-address</i></li> </ul> | <b>brief detail extensive none</b>         |
| <b>RP</b>                                | Rendezvous point for the PIM group.                                                                                                                    | <b>brief detail extensive none</b>         |



Table 273: show pim join Output Fields (*continued*)

| Field Name                | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Level of Output                    |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| <b>Flags</b>              | PIM flags: <ul style="list-style-type: none"> <li>• <b>bidirectional</b>—Bidirectional mode entry.</li> <li>• <b>dense</b>—Dense mode entry.</li> <li>• <b>rptree</b>—Entry is on the rendezvous point tree.</li> <li>• <b>sparse</b>—Sparse mode entry.</li> <li>• <b>spt</b>—Entry is on the shortest-path tree for the source.</li> <li>• <b>wildcard</b>—Entry is on the shared tree.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <b>brief detail extensive none</b> |
| <b>Upstream interface</b> | RPF interface toward the source address for the source-specific state (S,G) or toward the rendezvous point (RP) address for the non-source-specific state (*,G).<br><br>For bidirectional PIM, <b>RP Link</b> means that the interface is directly connected to a subnet that contains a phantom RP address.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>brief detail extensive none</b> |
| <b>Upstream neighbor</b>  | Information about the upstream neighbor: <b>Direct</b> , <b>Local</b> , <b>Unknown</b> , or a specific IP address.<br><br>For bidirectional PIM, <b>Direct</b> means that the interface is directly connected to a subnet that contains a phantom RP address.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <b>extensive</b>                   |
| <b>Upstream state</b>     | Information about the upstream interface: <ul style="list-style-type: none"> <li>• <b>Join to RP</b>—Sending a join to the rendezvous point.</li> <li>• <b>Join to Source</b>—Sending a join to the source.</li> <li>• <b>Local RP</b>—Sending neither join messages nor prune messages toward the RP, because this router is the rendezvous point.</li> <li>• <b>Local Source</b>—Sending neither join messages nor prune messages toward the source, because the source is locally attached to this routing device.</li> <li>• <b>Prune to RP</b>—Sending a prune to the rendezvous point.</li> <li>• <b>Prune to Source</b>—Sending a prune to the source.</li> </ul> <p><b>NOTE:</b> RP group range entries have <b>None</b> in the <b>Upstream state</b> field because RP group ranges do not trigger actual PIM join messages between routers.</p> | <b>extensive</b>                   |



Table 273: show pim join Output Fields (*continued*)

| Field Name                                | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Level of Output  |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| <b>Downstream neighbors</b>               | <p>Information about downstream interfaces:</p> <ul style="list-style-type: none"> <li>• <b>Interface</b>—Interface name for the downstream neighbor.</li> </ul> <p><b>NOTE:</b> A pseudo PIM-SM interface appears for all IGMP-only interfaces.</p> <ul style="list-style-type: none"> <li>• <b>Interface address</b>—Address of the downstream neighbor.</li> <li>• <b>State</b>—Information about the downstream neighbor: <b>join</b> or <b>prune</b>.</li> <li>• <b>Flags</b>—PIM join flags: <b>R (RPtree)</b>, <b>S (Sparse)</b>, <b>W (Wildcard)</b>, or <b>zero</b>.</li> <li>• <b>Uptime</b>—Time since the downstream interface joined the group.</li> <li>• <b>Time since last Join</b>—Time since the last join message was received from the downstream interface.</li> <li>• <b>Time since last Prune</b>—Time since the last prune message was received from the downstream interface.</li> </ul> | <b>extensive</b> |
| <b>Number of downstream interfaces</b>    | Total number of outgoing interfaces for each (S,G) entry.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <b>extensive</b> |
| <b>Assert Timeout</b>                     | Length of time between assert cycles on the downstream interface. Not displayed if the assert timer is null.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>extensive</b> |
| <b>Keepalive timeout</b>                  | Time remaining until the downstream join state is updated (in seconds). If the downstream join state is not updated before this keepalive timer reaches zero, the entry is deleted. If there is a directly connected host, <b>Keepalive timeout</b> is <b>Infinity</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>extensive</b> |
| <b>Uptime</b>                             | Time since the creation of (S,G) or (*,G) state. The uptime is not refreshed every time a PIM join message is received for an existing (S,G) or (*,G) state.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>extensive</b> |
| <b>Bidirectional accepting interfaces</b> | <p>Interfaces on the router that forward bidirectional PIM traffic.</p> <p>The reasons for forwarding bidirectional PIM traffic are that the interface is the winner of the designated forwarder election (<b>DF Winner</b>), or the interface is the reverse path forwarding (RPF) interface toward the RP (<b>RPF</b>).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <b>extensive</b> |



## Sample Output

**show pim join  
summary**

```
user@host> show pim join summary
Instance: PIM.master Family: INET

Route type          Route count
(s,g)               2
(*,g)              1

Instance: PIM.master Family: INET6
```

**show pim join (PIM  
Sparse Mode)**

```
user@host> show pim join
Instance: PIM.master Family: INET
R = Rendezvous Point Tree, S = Sparse, W = Wildcard

Group: 239.1.1.1
  Source: *
  RP: 10.255.14.144
  Flags: sparse,rptree,wildcard
  Upstream interface: Local

Group: 239.1.1.1
  Source: 10.255.14.144
  Flags: sparse,spt
  Upstream interface: Local

Group: 239.1.1.1
  Source: 10.255.70.15
  Flags: sparse,spt
  Upstream interface: so-1/0/0.0

Instance: PIM.master Family: INET6
R = Rendezvous Point Tree, S = Sparse, W = Wildcard
```

**show pim join  
(Bidirectional PIM)**

```
user@host> show pim join
Instance: PIM.master Family: INET
R = Rendezvous Point Tree, S = Sparse, W = Wildcard

Group: 224.1.1.0
  Bidirectional group prefix length: 24
  Source: *
  RP: 10.10.13.2
  Flags: bidirectional,rptree,wildcard
  Upstream interface: ge-0/0/1.0

Group: 224.1.3.0
  Bidirectional group prefix length: 24
  Source: *
  RP: 10.10.1.3
  Flags: bidirectional,rptree,wildcard
  Upstream interface: ge-0/0/1.0 (RP Link)

Group: 225.1.1.0
  Bidirectional group prefix length: 24
  Source: *
  RP: 10.10.13.2
  Flags: bidirectional,rptree,wildcard
  Upstream interface: ge-0/0/1.0
```



```
Group: 225.1.3.0
  Bidirectional group prefix length: 24
  Source: *
  RP: 10.10.1.3
  Flags: bidirectional,rptree,wildcard
  Upstream interface: ge-0/0/1.0 (RP Link)

Instance: PIM.master Family: INET6
R = Rendezvous Point Tree, S = Sparse, W = Wildcard
```

#### **show pim join instance** **<instance-name>**

```
user@host> show pim join instance VPN-A
Instance: PIM.VPN-A Family: INET
R = Rendezvous Point Tree, S = Sparse, W = Wildcard

Group: 235.1.1.2
  Source: *
  RP: 10.10.47.100
  Flags: sparse,rptree,wildcard
  Upstream interface: Local

Group: 235.1.1.2
  Source: 192.168.195.74
  Flags: sparse,spt
  Upstream interface: at-0/3/1.0

Group: 235.1.1.2
  Source: 192.168.195.169
  Flags: sparse
  Upstream interface: so-1/0/1.0

Instance: PIM.VPN-A Family: INET6
R = Rendezvous Point Tree, S = Sparse, W = Wildcard
```

#### **show pim join detail**

```
user@host> show pim join detail
Instance: PIM.master Family: INET
R = Rendezvous Point Tree, S = Sparse, W = Wildcard

Group: 239.1.1.1
  Source: *
  RP: 10.255.14.144
  Flags: sparse,rptree,wildcard
  Upstream interface: Local

Group: 239.1.1.1
  Source: 10.255.14.144
  Flags: sparse,spt
  Upstream interface: Local

Group: 239.1.1.1
  Source: 10.255.70.15
  Flags: sparse,spt
  Upstream interface: so-1/0/0.0

Instance: PIM.master Family: INET6
R = Rendezvous Point Tree, S = Sparse, W = Wildcard
```

#### **show pim join**

```
user@host> show pim join extensive
Instance: PIM.master Family: INET
```



**extensive (PIM Sparse Mode)**

R = Rendezvous Point Tree, S = Sparse, W = Wildcard

```

Group: 239.1.1.1
Source: *
RP: 10.255.14.144
Flags: sparse,rptree,wildcard
Upstream interface: Local
Upstream neighbor: Local
Upstream state: Local RP
Uptime: 00:03:49
Downstream neighbors:
  Interface: so-1/0/0.0
    10.111.10.2 State: Join Flags: SRW Timeout: 174
    Uptime: 00:03:49 Time since last Join: 00:01:49
  Interface: mt-1/1/0.32768
    10.10.47.100 State: Join Flags: SRW Timeout: Infinity
    Uptime: 00:03:49 Time since last Join: 00:01:49
Number of downstream interfaces: 2

```

```

Group: 239.1.1.1
Source: 10.255.14.144
Flags: sparse,spt
Upstream interface: Local
Upstream neighbor: Local
Upstream state: Local Source, Local RP
Keepalive timeout: 344
Uptime: 00:03:49
Downstream neighbors:
  Interface: so-1/0/0.0
    10.111.10.2 State: Join Flags: S Timeout: 174
    Uptime: 00:03:49 Time since last Prune: 00:01:49
  Interface: mt-1/1/0.32768
    10.10.47.100 State: Join Flags: S Timeout: Infinity
    Uptime: 00:03:49 Time since last Prune: 00:01:49
Number of downstream interfaces: 2

```

```

Group: 239.1.1.1
Source: 10.255.70.15
Flags: sparse,spt
Upstream interface: so-1/0/0.0
Upstream neighbor: 10.111.10.2
Upstream state: Local RP, Join to Source
Keepalive timeout: 344
Uptime: 00:03:49
Downstream neighbors:
  Interface: Pseudo-GMP
    fe-0/0/0.0 fe-0/0/1.0 fe-0/0/3.0
  Interface: so-1/0/0.0 (pruned)
    10.111.10.2 State: Prune Flags: SR Timeout: 174
    Uptime: 00:03:49 Time since last Prune: 00:01:49
  Interface: mt-1/1/0.32768
    10.10.47.100 State: Join Flags: S Timeout: Infinity
    Uptime: 00:03:49 Time since last Prune: 00:01:49
Number of downstream interfaces: 3

```

```

Instance: PIM.master Family: INET6
R = Rendezvous Point Tree, S = Sparse, W = Wildcard

```

**show pim join extensive**

```

user@host> show pim join extensive
Instance: PIM.master Family: INET
R = Rendezvous Point Tree, S = Sparse, W = Wildcard

```



**(Bidirectional PIM)**

```
Group: 224.1.1.0
  Bidirectional group prefix length: 24
  Source: *
  RP: 10.10.13.2
  Flags: bidirectional,rptree,wildcard
  Upstream interface: ge-0/0/1.0
  Upstream neighbor: 10.10.1.2
  Upstream state: None
  Uptime: 00:03:49
  Bidirectional accepting interfaces:
    Interface: ge-0/0/1.0      (RPF)
    Interface: lo0.0          (DF Winner)
  Number of downstream interfaces: 0

Group: 225.1.1.0
  Bidirectional group prefix length: 24
  Source: *
  RP: 10.10.13.2
  Flags: bidirectional,rptree,wildcard
  Upstream interface: ge-0/0/1.0
  Upstream neighbor: 10.10.1.2
  Upstream state: None
  Uptime: 00:03:49
  Bidirectional accepting interfaces:
    Interface: ge-0/0/1.0      (RPF)
    Interface: lo0.0          (DF Winner)
  Downstream neighbors:
    Interface: lt-1/0/10.24
      10.0.24.4 State: Join   RW   Timeout: 185
    Interface: lt-1/0/10.23
      10.0.23.3 State: Join   RW   Timeout: 184
  Number of downstream interfaces: 2

Group: 225.1.3.0
  Bidirectional group prefix length: 24
  Source: *
  RP: 10.10.1.3
  Flags: bidirectional,rptree,wildcard
  Upstream interface: ge-0/0/1.0 (RP Link)
  Upstream neighbor: Direct
  Upstream state: Local RP
  Uptime: 00:03:49
  Bidirectional accepting interfaces:
    Interface: ge-0/0/1.0      (RPF)
    Interface: lo0.0          (DF Winner)
    Interface: xe-4/1/0.0      (DF Winner)
  Number of downstream interfaces: 0

Instance: PIM.master Family: INET6
R = Rendezvous Point Tree, S = Sparse, W = Wildcard
```

**show pim join  
extensive  
(Bidirectional PIM with**

```
user@host> show pim join extensive
Instance: PIM.master Family: INET
R = Rendezvous Point Tree, S = Sparse, W = Wildcard
```



### a Directly Connected Phantom RP)

```

Group: 224.1.3.0
Bidirectional group prefix length: 24
Source: *
RP: 10.10.1.3
Flags: bidirectional,rptree,wildcard
Upstream interface: ge-0/0/1.0 (RP Link)
Upstream neighbor: Direct
Upstream state: Local RP
Uptime: 00:03:49
Bidirectional accepting interfaces:
  Interface: ge-0/0/1.0      (RPF)
  Interface: lo0.0          (DF Winner)
  Interface: xe-4/1/0.0      (DF Winner)
Number of downstream interfaces: 0

```

### show pim join instance <instance-name> extensive

```

user@host> show pim join instance VPN-A extensive
Instance: PIM.VPN-A Family: INET
R = Rendezvous Point Tree, S = Sparse, W = Wildcard

```

```

Group: 235.1.1.2
Source: *
RP: 10.10.47.100
Flags: sparse,rptree,wildcard
Upstream interface: Local
Upstream neighbor: Local
Upstream state: Local RP
Uptime: 00:03:49
Downstream neighbors:
  Interface: mt-1/1/0.32768
    10.10.47.101 State: Join Flags: SRW Timeout: 156
    Uptime: 00:03:49 Time since last Join: 00:01:49
Number of downstream interfaces: 1

```

```

Group: 235.1.1.2
Source: 192.168.195.74
Flags: sparse,spt
Upstream interface: at-0/3/1.0
Upstream neighbor: 10.111.30.2
Upstream state: Local RP, Join to Source
Keepalive timeout: 156
Uptime: 00:14:52

```

```

Group: 235.1.1.2
Source: 192.168.195.169
Flags: sparse
Upstream interface: so-1/0/1.0
Upstream neighbor: 10.111.20.2
Upstream state: Local RP, Join to Source
Keepalive timeout: 156
Uptime: 00:14:52

```



## show pim neighbors

---

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | <code>show pim neighbors</code><br><code>&lt;brief   detail&gt;</code><br><code>&lt;inet   inet6&gt;</code><br><code>&lt;instance (<i>instance-name</i>   all)&gt;</code><br><code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | <code>show pim neighbors</code><br><code>&lt;brief   detail&gt;</code><br><code>&lt;inet   inet6&gt;</code><br><code>&lt;instance (<i>instance-name</i>   all)&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>inet6</b> and <b>instance</b> options introduced in Junos OS Release 10.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.<br>Support for bidirectional PIM added in Junos OS Release 12.1.<br>Support for the <b>instance all</b> option added in Junos OS Release 12.1.                                                                                                                                                                                                                                                               |
| <b>Description</b>                                  | Display information about Protocol Independent Multicast (PIM) neighbors.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>                                      | <b>none</b> —(Same as <b>brief</b> ) Display standard information about PIM neighbors for all supported family addresses for the main instance.<br><br><b>brief   detail</b> —(Optional) Display the specified level of output.<br><br><b>inet   inet6</b> —(Optional) Display information about PIM neighbors for IPv4 or IPv6 family addresses, respectively.<br><br><b>instance (<i>instance-name</i>   all)</b> —(Optional) Display information about neighbors for the specified PIM-enabled routing instance or for all routing instances.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>List of Sample Output</b>                        | <a href="#">show pim neighbors on page 4039</a><br><a href="#">show pim neighbors brief on page 4039</a><br><a href="#">show pim neighbors instance on page 4039</a><br><a href="#">show pim neighbors detail on page 4039</a><br><a href="#">show pim neighbors detail (With BFD) on page 4040</a>                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Output Fields</b>                                | <a href="#">Table 274 on page 4037</a> describes the output fields for the <b>show pim neighbors</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |



Table 274: show pim neighbors Output Fields

| Field Name                                       | Field Description                                                                                                                                                                                                                                                                                              | Level of Output   |
|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| <b>Instance</b>                                  | Name of the routing instance.                                                                                                                                                                                                                                                                                  | All levels        |
| <b>Interface</b>                                 | Interface through which the neighbor is reachable.                                                                                                                                                                                                                                                             | All levels        |
| <b>Neighbor addr</b>                             | Address of the neighboring PIM routing device.                                                                                                                                                                                                                                                                 | All levels        |
| <b>IP</b>                                        | IP version: 4 or 6.                                                                                                                                                                                                                                                                                            | All levels        |
| <b>V</b>                                         | PIM version running on the neighbor: 1 or 2.                                                                                                                                                                                                                                                                   | All levels        |
| <b>Mode</b>                                      | PIM mode of the neighbor: <b>Sparse</b> , <b>Dense</b> , <b>SparseDense</b> , or <b>Unknown</b> . When the neighbor is running PIM version 2, this mode is always <b>Unknown</b> .                                                                                                                             | All levels        |
| <b>Option</b>                                    | Can be one or more of the following: <ul style="list-style-type: none"> <li>• <b>B</b>—Bidirectional Capable.</li> <li>• <b>H</b>—Hello Option Holdtime.</li> <li>• <b>G</b>—Generation Identifier.</li> <li>• <b>P</b>—Hello Option DR Priority.</li> <li>• <b>L</b>—Hello Option LAN Prune Delay.</li> </ul> | <b>brief</b> none |
| <b>Uptime</b>                                    | Time the neighbor has been operational since the PIM process was last initialized, in the format <b>dd:hh:mm:ss ago</b> for less than a week and <b>nwnd:hh:mm:ss ago</b> for more than a week.                                                                                                                | All levels        |
| <b>Address</b>                                   | Address of the neighboring PIM router.                                                                                                                                                                                                                                                                         | <b>detail</b>     |
| <b>BFD</b>                                       | Status and operational state of the Bidirectional Forwarding Detection (BFD) protocol on the interface: <b>Enabled</b> , <b>Operational state is up</b> , or <b>Disabled</b> .                                                                                                                                 | <b>detail</b>     |
| <b>Hello Option Holdtime</b>                     | Time for which the neighbor is available, in seconds. The range of values is 0 through 65,535.                                                                                                                                                                                                                 | <b>detail</b>     |
| <b>Hello Default Holdtime</b>                    | Default holdtime and the time remaining if the <b>holdtime</b> option is not in the received hello message.                                                                                                                                                                                                    | <b>detail</b>     |
| <b>Hello Option DR Priority</b>                  | Designated router election priority. The range of values is 0 through 255.                                                                                                                                                                                                                                     | <b>detail</b>     |
| <b>Hello Option Generation ID</b>                | 9-digit or 10-digit number used to tag hello messages.                                                                                                                                                                                                                                                         | <b>detail</b>     |
| <b>Hello Option Bi-Directional PIM supported</b> | Neighbor can process bidirectional PIM messages.                                                                                                                                                                                                                                                               | <b>detail</b>     |
| <b>Hello Option LAN Prune Delay</b>              | Time to wait before the neighbor receives prune messages, in the format <b>delay nnn ms override nnnn ms</b> .                                                                                                                                                                                                 | <b>detail</b>     |



Table 274: show pim neighbors Output Fields (*continued*)

| Field Name                 | Field Description                                                                                                                                                                                                                                                                     | Level of Output |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Join Suppression supported | Neighbor is capable of join suppression.                                                                                                                                                                                                                                              | detail          |
| Rx Join                    | Information about joins received from the neighbor. <ul style="list-style-type: none"><li>• <b>Group</b>—Group addresses in the join message.</li><li>• <b>Source</b>—Address of the source in the join message.</li><li>• <b>Timeout</b>—Time for which the join is valid.</li></ul> | detail          |



## Sample Output

### show pim neighbors

```
user@host> show pim neighbors
Instance: PIM.master
B = Bidirectional Capable, G = Generation Identifier,
H = Hello Option Holdtime, L = Hello Option LAN Prune Delay,
P = Hello Option DR Priority

Interface          IP V Mode      Option      Uptime Neighbor addr
so-1/0/0.0         4 2           HPLG        00:07:10 10.111.10.2
```

### show pim neighbors brief

The output for the **show pim neighbors brief** command is identical to that for the **show pim neighbors** command. For sample output, see [show pim neighbors on page 4039](#).

### show pim neighbors instance

```
user@host> show pim neighbors instance VPN-A
Instance: PIM.VPN-A
B = Bidirectional Capable, G = Generation Identifier,
H = Hello Option Holdtime, L = Hello Option LAN Prune Delay,
P = Hello Option DR Priority

Interface          IP V Mode      Option      Uptime Neighbor addr
at-0/3/1.0         4 2           HPLG        00:07:54 10.111.30.2
mt-1/1/0.32768     4 2           HPLG        00:07:22 10.10.47.101
so-1/0/1.0         4 2           HPLG        00:07:50 10.111.20.2
```

### show pim neighbors detail

```
user@host> show pim neighbors detail
Instance: PIM.master
Interface: ge-0/0/1.0

    Address: 10.10.1.1, IPv4, PIM v2, Mode: SparseDense, sg Join Count: 0, ts
Join Count: 2
    Hello Option Holdtime: 65535 seconds
    Hello Option DR Priority: 1
    Hello Option Generation ID: 2053759302
    Hello Option Bi-Directional PIM supported
    Hello Option LAN Prune Delay: delay 500 ms override 2000 ms
                                Join Suppression supported

    Address: 10.10.1.2, IPv4, PIM v2, sg Join Count: 0, ts
Join Count: 2
    BFD: Disabled
    Hello Option Holdtime: 105 seconds 93 remaining
    Hello Option DR Priority: 1
    Hello Option Generation ID: 1734018161
    Hello Option Bi-Directional PIM supported
    Hello Option LAN Prune Delay: delay 500 ms override 2000 ms
                                Join Suppression supported

Interface: lo0.0

    Address: 10.255.179.246, IPv4, PIM v2, Mode: SparseDense, sg Join Count:
0, ts
Join Count: 0
    Hello Option Holdtime: 65535 seconds
    Hello Option DR Priority: 1
    Hello Option Generation ID: 1997462267
    Hello Option Bi-Directional PIM supported
    Hello Option LAN Prune Delay: delay 500 ms override 2000 ms
                                Join Suppression supported
```



**show pim neighbors  
detail (With BFD)**

```
user@host> show pim neighbors detail
Instance: PIM.master
Interface: fe-1/0/0.0
  Address: 192.168.11.1,      IPv4, PIM v2, Mode: Sparse
    Hello Option Holdtime: 65535 seconds
    Hello Option DR Priority: 1
    Hello Option Generation ID: 836607909
    Hello Option LAN Prune Delay: delay 500 ms override 2000 ms

  Address: 192.168.11.2,      IPv4, PIM v2
    BFD: Enabled, Operational state is up
    Hello Default Holdtime: 105 seconds 104 remaining
    Hello Option DR Priority: 1
    Hello Option Generation ID: 1907549685
    Hello Option LAN Prune Delay: delay 500 ms override 2000 ms

Interface: fe-1/0/1.0
  Address: 192.168.12.1,      IPv4, PIM v2
    BFD: Disabled
    Hello Default Holdtime: 105 seconds 80 remaining
    Hello Option DR Priority: 1
    Hello Option Generation ID: 1971554705
    Hello Option LAN Prune Delay: delay 500 ms override 2000 ms
```



## show pim rps

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | <pre>show pim rps &lt;brief   detail   extensive&gt; &lt;group-address&gt; &lt;inet   inet6&gt; &lt;instance instance-name&gt; &lt;logical-system (all   logical-system-name)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | <pre>show pim rps &lt;brief   detail   extensive&gt; &lt;group-address&gt; &lt;inet   inet6&gt; &lt;instance instance-name&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>                          | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>inet6</b> and <b>instance</b> options introduced in Junos OS Release 10.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Support for bidirectional PIM added in Junos OS Release 12.1.</p>                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>                                  | Display information about Protocol Independent Multicast (PIM) rendezvous points (RPs).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                                      | <p><b>none</b>—Display standard information about PIM RPs for all groups and family addresses for all routing instances.</p> <p><b>brief   detail   extensive</b>—(Optional) Display the specified level of output.</p> <p><b>group-address</b>—(Optional) Display the RPs for a particular group. If you specify a group address, the output lists the routing device that is the RP for that group.</p> <p><b>inet   inet6</b>—(Optional) Display information for IPv4 or IPv6 family addresses, respectively.</p> <p><b>instance instance-name</b>—(Optional) Display information about RPs for a specific PIM-enabled routing instance.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>                        | <ul style="list-style-type: none"> <li>Example: Configuring Bidirectional PIM</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>List of Sample Output</b>                        | <p><a href="#">show pim rps on page 4044</a></p> <p><a href="#">show pim rps brief on page 4044</a></p> <p><a href="#">show pim rps &lt;group-address&gt; (Bidirectional PIM) on page 4044</a></p> <p><a href="#">show pim rps &lt;group-address&gt; (PIM Dense Mode) on page 4044</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |



[show pim rps <group-address> \(SSM Range Without asm-override-ssm Configured\) on page 4044](#)  
[show pim rps <group-address> \(SSM Range With asm-override-ssm Configured and a Sparse-Mode RP\) on page 4045](#)  
[show pim rps <group-address> \(SSM Range With asm-override-ssm Configured and a Bidirectional RP\) on page 4045](#)  
[show pim rps instance on page 4046](#)  
[show pim rps extensive \(PIM Sparse Mode\) on page 4046](#)  
[show pim rps extensive \(Bidirectional PIM\) on page 4046](#)  
[show pim rps extensive \(PIM Anycast RP in Use\) on page 4046](#)

**Output Fields** [Table 275 on page 4042](#) describes the output fields for the **show pim rps** command. Output fields are listed in the approximate order in which they appear.

**Table 275: show pim rps Output Fields**

| Field Name                      | Field Description                                                                                                                                                                                                                                                                                                                                                                          | Level of Output         |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>Instance</b>                 | Name of the routing instance.                                                                                                                                                                                                                                                                                                                                                              | All levels              |
| <b>Family or Address family</b> | Name of the address family: <b>inet</b> (IPv4) or <b>inet6</b> (IPv6).                                                                                                                                                                                                                                                                                                                     | All levels              |
| <b>RP address</b>               | Address of the rendezvous point.                                                                                                                                                                                                                                                                                                                                                           | All levels              |
| <b>Type</b>                     | Type of RP: <ul style="list-style-type: none"> <li><b>auto-rp</b>—Address of the RP known through the Auto-RP protocol.</li> <li><b>bootstrap</b>—Address of the RP known through the bootstrap router protocol (BSR).</li> <li><b>embedded</b>—Address of the RP known through an embedded RP (IPv6).</li> <li><b>static</b>—Address of RP known through static configuration.</li> </ul> | <b>brief none</b>       |
| <b>Holdtime</b>                 | How long to keep the RP active, with time remaining, in seconds.                                                                                                                                                                                                                                                                                                                           | All levels              |
| <b>Timeout</b>                  | How long until the local routing device determines the RP to be unreachable, in seconds.                                                                                                                                                                                                                                                                                                   | All levels              |
| <b>Groups</b>                   | Number of groups currently using this RP.                                                                                                                                                                                                                                                                                                                                                  | All levels              |
| <b>Group prefixes</b>           | Addresses of groups that this RP can span.                                                                                                                                                                                                                                                                                                                                                 | <b>brief none</b>       |
| <b>Learned via</b>              | Address and method by which the RP was learned.                                                                                                                                                                                                                                                                                                                                            | <b>detail extensive</b> |
| <b>Mode</b>                     | The PIM mode of the RP: bidirectional or sparse.<br><br>If a sparse and bidirectional RPs are configured with the same RP address, they appear as separate entries in both formats.                                                                                                                                                                                                        | All levels              |
| <b>Time Active</b>              | How long the RP has been active, in the format <b>hh:mm:ss</b> .                                                                                                                                                                                                                                                                                                                           | <b>detail extensive</b> |



Table 275: show pim rps Output Fields (*continued*)

| Field Name                            | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Level of Output                                     |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| <b>Device Index</b>                   | Index value of the order in which Junos OS finds and initializes the interface.<br><br>For bidirectional RPs, the <b>Device Index</b> output field is omitted because bidirectional RPs do not require encapsulation and de-encapsulation interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>detail extensive</b>                             |
| <b>Subunit</b>                        | Logical unit number of the interface.<br><br>For bidirectional RPs, the <b>Subunit</b> output field is omitted because bidirectional RPs do not require encapsulation and de-encapsulation interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <b>detail extensive</b>                             |
| <b>Interface</b>                      | Either the encapsulation or the de-encapsulation logical interface, depending on whether this routing device is a designated router (DR) facing an RP router, or is the local RP, respectively.<br><br>For bidirectional RPs, the <b>Interface</b> output field is omitted because bidirectional RPs do not require encapsulation and de-encapsulation interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>detail extensive</b>                             |
| <b>Group Ranges</b>                   | Addresses of groups that this RP spans.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <b>detail extensive</b><br><br><i>group-address</i> |
| <b>Active groups using RP</b>         | Number of groups currently using this RP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>detail extensive</b>                             |
| <b>total</b>                          | Total number of active groups for this RP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <b>detail extensive</b>                             |
| <b>Register State for RP</b>          | Current register state for each group:<br><ul style="list-style-type: none"> <li>• <b>Group</b>—Multicast group address.</li> <li>• <b>Source</b>—Multicast source address for which the PIM register is sent or received, depending on whether this router is a designated router facing an RP router, or is the local RP, respectively:</li> <li>• <b>First Hop</b>—PIM-designated routing device that sent the Register message (the source address in the IP header).</li> <li>• <b>RP Address</b>—RP to which the Register message was sent (the destination address in the IP header).</li> <li>• <b>State</b>:<br/>On the designated router: <ul style="list-style-type: none"> <li>• <b>Send</b>—Sending Register messages.</li> <li>• <b>Probe</b>—Sent a null register. If a Register-Stop message does not arrive in 5 seconds, the designated router resumes sending Register messages.</li> <li>• <b>Suppress</b>—Received a Register-Stop message. The designated router is waiting for the timer to resume before changing to <b>Probe</b> state.</li> </ul> </li> <li>• On the RP: <ul style="list-style-type: none"> <li>• <b>Receive</b>—Receiving Register messages.</li> </ul> </li> </ul> | <b>extensive</b>                                    |
| <b>Anycast-PIM rpset</b>              | If anycast RP is configured, the addresses of the RPs in the set.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <b>extensive</b>                                    |
| <b>Anycast-PIM local address used</b> | If anycast RP is configured, the local address used by the RP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>extensive</b>                                    |



Table 275: show pim rps Output Fields (*continued*)

| Field Name                        | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Level of Output      |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| <b>Anycast-PIM Register State</b> | <p>If anycast RP is configured, the current register state for each group:</p> <ul style="list-style-type: none"> <li>• <b>Group</b>—Multicast group address.</li> <li>• <b>Source</b>—Multicast source address for which the PIM register is sent or received, depending on whether this routing device is a designated router facing an RP router, or is the local RP, respectively.</li> <li>• <b>Origin</b>—How the information was obtained: <ul style="list-style-type: none"> <li>• <b>DIRECT</b>—From a local attachment</li> <li>• <b>MSDP</b>—From the Multicast Source Discovery Protocol (MSDP)</li> <li>• <b>DR</b>—From the designated router</li> </ul> </li> </ul> | <b>extensive</b>     |
| <b>RP selected</b>                | For sparse mode and bidirectional mode, the identity of the RP for the specified group address.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <i>group-address</i> |

## Sample Output

### show pim rps

```

user@host> show pim rps
Instance: PIM.master
Address family INET
RP address      Type      Mode   Holdtime Timeout Groups  Group prefixes
10.10.1.3        static    bidir   150      None      2  224.1.3.0/24
                  225.1.3.0/24
10.10.13.2       static    bidir   150      None      2  224.1.1.0/24
                  225.1.1.0/24

```

### show pim rps brief

The output for the **show pim rps brief** command is identical to that for the **show pim rps** command. For sample output, see [show pim rps on page 4044](#).

### show pim rps <group-address> (Bidirectional PIM)

```

user@host> show pim rps 224.1.1.1
Instance: PIM.master

224.1.0.0/16
  11.4.12.75 (Bidirectional)

RP selected: 11.4.12.75

```

### show pim rps <group-address> (PIM Dense Mode)

```

user@host> show pim rps 224.1.1.1
Instance: PIM.master

Dense Mode active for group 224.1.1.1

```

### show pim rps <group-address> (SSM Range Without

```

user@host> show pim rps 224.1.1.1
Instance: PIM.master

Source-specific Mode (SSM) active for group 224.1.1.1

```



### asm-override-ssm Configured)

show pim rps  
<group-address>  
(SSM Range With  
asm-override-ssm  
Configured and a  
Sparse-Mode RP)

```
user@host> show pim rps 224.1.1.1
```

```
Instance: PIM.master
```

```
Source-specific Mode (SSM) active with Sparse Mode ASM override for group 224.1.1.1
```

```
224.1.0.0/16
```

```
11.4.12.75
```

```
RP selected: 11.4.12.75
```

show pim rps  
<group-address>  
(SSM Range With  
asm-override-ssm

```
user@host> show pim rps 224.1.1.1
```

```
Instance: PIM.master
```

```
Source-specific Mode (SSM) active with Sparse Mode ASM override for group 224.1.1.1
```



Configured and a  
Bidirectional RP)

224.1.0.0/16  
11.4.12.75 (Bidirectional)

RP selected: (null)

show pim rps instance

user@host> show pim rps instance VPN-A

Instance: PIM.VPN-A

Address family INET

| RP address   | Type   | Holdtime | Timeout | Groups | Group prefixes |
|--------------|--------|----------|---------|--------|----------------|
| 10.10.47.100 | static | 0        | None    | 1      | 224.0.0.0/4    |

Address family INET6

show pim rps extensive  
(PIM Sparse Mode)

user@host> show pim rps extensive

Instance: PIM.master

Family: INET

RP: 10.255.245.91

Learned via: static configuration

Time Active: 00:05:48

Holdtime: 45 with 36 remaining

Device Index: 122

Subunit: 32768

Interface: pd-6/0/0.32768

Group Ranges:

224.0.0.0/4, 36s remaining

Active groups using RP:

225.1.1.1

total 1 groups active

Register State for RP:

| Group     | Source         | FirstHop      | RP Address    | State   | Timeout |
|-----------|----------------|---------------|---------------|---------|---------|
| 225.1.1.1 | 192.168.195.78 | 10.255.14.132 | 10.255.245.91 | Receive | 0       |

show pim rps extensive  
(Bidirectional PIM)

user@host> show pim rps extensive

Instance: PIM.master

Address family INET

RP: 10.10.1.3

Learned via: static configuration

Mode: Bidirectional

Time Active: 01:58:07

Holdtime: 150

Group Ranges:

224.1.3.0/24

225.1.3.0/24

RP: 10.10.13.2

Learned via: static configuration

Mode: Bidirectional

Time Active: 01:58:07

Holdtime: 150

Group Ranges:

224.1.1.0/24

225.1.1.0/24

user@host> show pim rps extensive



show pim rps extensive  
(PIM Anycast RP in  
Use)

Instance: PIM.master

Family: INET

RP: 10.10.10.2

Learned via: static configuration

Time Active: 00:54:52

Holdtime: 0

Device Index: 130

Subunit: 32769

Interface: pimd.32769

Group Ranges:

224.0.0.0/4

Active groups using RP:

224.10.10.10

total 1 groups active

Anycast-PIM rpset:

10.100.111.34

10.100.111.17

10.100.111.55

Anycast-PIM local address used: 10.100.111.1

Anycast-PIM Register State:

| Group        | Source     | Origin |
|--------------|------------|--------|
| 224.1.1.1    | 10.10.95.2 | DIRECT |
| 224.1.1.2    | 10.10.95.2 | DIRECT |
| 224.10.10.10 | 10.10.70.1 | MSDP   |
| 224.10.10.11 | 10.10.70.1 | MSDP   |
| 224.20.20.1  | 10.10.71.1 | DR     |

Address family INET6

Anycast-PIM rpset:

ab::1

ab::2

Anycast-PIM local address used: cd::1

Anycast-PIM Register State:

| Group         | Source       | Origin |
|---------------|--------------|--------|
| ::224.1.1.1   | ::10.10.95.2 | DIRECT |
| ::224.1.1.2   | ::10.10.95.2 | DIRECT |
| ::224.20.20.1 | ::10.10.71.1 | DR     |



## show pim source

---

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | <code>show pim source</code><br><code>&lt;brief   detail&gt;</code><br><code>&lt;inet   inet6&gt;</code><br><code>&lt;instance <i>instance-name</i>&gt;</code><br><code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code><br><code>&lt;source-prefix&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | <code>show pim source</code><br><code>&lt;brief   detail&gt;</code><br><code>&lt;inet   inet6&gt;</code><br><code>&lt;instance <i>instance-name</i>&gt;</code><br><code>&lt;source-prefix&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>inet6</b> and <b>instance</b> options introduced in Junos OS Release 10.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>                                  | Display information about the Protocol Independent Multicast (PIM) source reverse path forwarding (RPF) state.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                                      | <b>none</b> —Display standard information about the PIM RPF state for all supported family addresses for all routing instances.<br><br><b>brief   detail</b> —(Optional) Display the specified level of output.<br><br><b>inet   inet6</b> —(Optional) Display information for IPv4 or IPv6 family addresses, respectively.<br><br><b>instance <i>instance-name</i></b> —(Optional) Display information about the RPF state for a specific PIM-enabled routing instance.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.<br><br><b>source-prefix</b> —(Optional) Display the state for source RPF states in the given range. |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>List of Sample Output</b>                        | <a href="#">show pim source on page 4049</a><br><a href="#">show pim source brief on page 4049</a><br><a href="#">show pim source detail on page 4049</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Output Fields</b>                                | <a href="#">Table 276 on page 4049</a> describes the output fields for the <b>show pim source</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |



Table 276: show pim source Output Fields

| Field Name         | Field Description                                                     |
|--------------------|-----------------------------------------------------------------------|
| Instance           | Name of the routing instance.                                         |
| Source             | Address of the source or reverse path.                                |
| Prefix/length      | Prefix and prefix length for the route used to reach the RPF address. |
| Upstream interface | RPF interface toward the source address.                              |
| Upstream Neighbor  | Address of the RPF neighbor used to reach the source address.         |

## Sample Output

### show pim source

```

user@host> show pim source
Instance: PIM.master Family: INET

Source 10.255.14.144
  Prefix 10.255.14.144/32
  Upstream interface Local
  Upstream neighbor Local

Source 10.255.70.15
  Prefix 10.255.70.15/32
  Upstream interface so-1/0/0.0
  Upstream neighbor 10.111.10.2

Instance: PIM.master Family: INET6

```

### show pim source brief

The output for the **show pim source brief** command is identical to that for the **show pim source** command. For sample output, see [show pim source on page 4049](#).

### show pim source detail

```

user@host> show pim source detail
Instance: PIM.master Family: INET

Source 10.255.14.144
  Prefix 10.255.14.144/32
  Upstream interface Local
  Upstream neighbor Local
  Active groups:228.0.0.0
    239.1.1.1
    239.1.1.1

Source 10.255.70.15
  Prefix 10.255.70.15/32
  Upstream interface so-1/0/0.0
  Upstream neighbor 10.111.10.2
  Active groups:239.1.1.1

Instance: PIM.master Family: INET6

```



## show pim statistics

---

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | show pim statistics<br><inet   inet6><br><instance <i>instance-name</i> ><br><interface <i>interface-name</i> ><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Syntax (EX Series Switch and the QFX Series)</b> | show pim statistics<br><inet   inet6><br><instance <i>instance-name</i> ><br><interface <i>interface-name</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>inet6</b> and <b>instance</b> options introduced in Junos OS Release 10.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.<br>Support for bidirectional PIM added in Junos OS Release 12.1.                                                                                                                                                                                                   |
| <b>Description</b>                                  | Display Protocol Independent Multicast (PIM) statistics.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                                      | <b>none</b> —Display PIM statistics.<br><br><b>inet   inet6</b> —(Optional) Display IPv4 or IPv6 PIM statistics, respectively.<br><br><b>instance <i>instance-name</i></b> —(Optional) Display statistics for a specific routing instance enabled by Protocol Independent Multicast (PIM).<br><br><b>interface <i>interface-name</i></b> —(Optional) Display statistics about the specified interface.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| <b>Required Privilege Level</b>                     | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>                        | <ul style="list-style-type: none"><li>• <a href="#">clear pim statistics on page 3944</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>List of Sample Output</b>                        | <a href="#">show pim statistics on page 4058</a><br><a href="#">show pim statistics inet interface &lt;interface-name&gt; on page 4059</a><br><a href="#">show pim statistics inet6 interface &lt;interface-name&gt; on page 4059</a><br><a href="#">show pim statistics instance &lt;instance-name&gt; on page 4060</a><br><a href="#">show pim statistics interface &lt;interface-name&gt; on page 4062</a>                                                                                                                                                       |
| <b>Output Fields</b>                                | <a href="#">Table 277 on page 4051</a> describes the output fields for the <b>show pim statistics</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                              |



Table 277: show pim statistics Output Fields

| Field Name              | Field Description                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Instance</b>         | <p>Name of the routing instance.</p> <p>This field only appears if you specify an interface, for example:</p> <ul style="list-style-type: none"> <li>• <b>inet interface <i>interface-name</i></b></li> <li>• <b>inet6 interface <i>interface-name</i></b></li> <li>• <b>interface <i>interface-name</i></b></li> </ul>                                                                                                 |
| <b>Family</b>           | <p>Output is for IPv4 or IPv6 PIM statistics. <b>INET</b> indicates IPv4 statistics, and <b>INET6</b> indicates IPv6 statistics.</p> <p>This field only appears if you specify an interface, for example:</p> <ul style="list-style-type: none"> <li>• <b>inet interface <i>interface-name</i></b></li> <li>• <b>inet6 interface <i>interface-name</i></b></li> <li>• <b>interface <i>interface-name</i></b></li> </ul> |
| <b>PIM statistics</b>   | PIM statistics for all interfaces or for the specified interface.                                                                                                                                                                                                                                                                                                                                                       |
| <b>PIM message type</b> | Message type for which statistics are displayed.                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Received</b>         | Number of received statistics.                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Sent</b>             | Number of messages sent of a certain type.                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Rx errors</b>        | Number of received packets that contained errors.                                                                                                                                                                                                                                                                                                                                                                       |
| <b>V2 Hello</b>         | PIM version 2 hello packets.                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>V2 Register</b>      | PIM version 2 register packets.                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>V2 Register Stop</b> | PIM version 2 register stop packets.                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>V2 Join Prune</b>    | PIM version 2 join and prune packets.                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>V2 Bootstrap</b>     | PIM version 2 bootstrap packets.                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>V2 Assert</b>        | PIM version 2 assert packets.                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>V2 Graft</b>         | PIM version 2 graft packets.                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>V2 Graft Ack</b>     | PIM version 2 graft acknowledgment packets.                                                                                                                                                                                                                                                                                                                                                                             |
| <b>V2 Candidate RP</b>  | PIM version 2 candidate RP packets.                                                                                                                                                                                                                                                                                                                                                                                     |



Table 277: show pim statistics Output Fields (*continued*)

| Field Name                              | Field Description                                                                                                                                              |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>V2 State Refresh</b>                 | PIM version 2 control messages related to PIM dense mode (PIM-DM) state refresh.<br><br>State refresh is an extension to PIM-DM. It not supported in Junos OS. |
| <b>V2 DF Election</b>                   | PIM version 2 send and receive messages associated with bidirectional PIM designated forwarder election.                                                       |
| <b>V1 Query</b>                         | PIM version 1 query packets.                                                                                                                                   |
| <b>V1 Register</b>                      | PIM version 1 register packets.                                                                                                                                |
| <b>V1 Register Stop</b>                 | PIM version 1 register stop packets.                                                                                                                           |
| <b>V1 Join Prune</b>                    | PIM version 1 join and prune packets.                                                                                                                          |
| <b>V1 RP Reachability</b>               | PIM version 1 RP reachability packets.                                                                                                                         |
| <b>V1 Assert</b>                        | PIM version 1 assert packets.                                                                                                                                  |
| <b>V1 Graft</b>                         | PIM version 1 graft packets.                                                                                                                                   |
| <b>V1 Graft Ack</b>                     | PIM version 1 graft acknowledgment packets.                                                                                                                    |
| <b>AutoRP Announce</b>                  | Auto-RP announce packets.                                                                                                                                      |
| <b>AutoRP Mapping</b>                   | Auto-RP mapping packets.                                                                                                                                       |
| <b>AutoRP Unknown type</b>              | Auto-RP packets with an unknown type.                                                                                                                          |
| <b>Anycast Register</b>                 | Auto-RP announce packets.                                                                                                                                      |
| <b>Anycast Register Stop</b>            | Auto-RP announce packets.                                                                                                                                      |
| <b>Global Statistics</b>                | Summary of PIM statistics for all interfaces.                                                                                                                  |
| <b>Hello dropped on neighbor policy</b> | Number of hello packets dropped because of a configured neighbor policy.                                                                                       |
| <b>Unknown type</b>                     | Number of PIM control packets received with an unknown type.                                                                                                   |
| <b>V1 Unknown type</b>                  | Number of PIM version 1 control packets received with an unknown type.                                                                                         |
| <b>Unknown Version</b>                  | Number of PIM control packets received with an unknown version. The version is not version 1 or version 2.                                                     |



Table 277: show pim statistics Output Fields (*continued*)

| Field Name                             | Field Description                                                                                                         |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <b>Neighbor unknown</b>                | Number of PIM control packets received (excluding PIM hello) without first receiving the hello packet.                    |
| <b>Bad Length</b>                      | Number of PIM control packets received for which the packet size does not match the PIM length field in the packet.       |
| <b>Bad Checksum</b>                    | Number of PIM control packets received for which the calculated checksum does not match the checksum field in the packet. |
| <b>Bad Receive If</b>                  | Number of PIM control packets received on an interface that does not have PIM configured.                                 |
| <b>Rx Bad Data</b>                     | Number of PIM control packets received that contain data for TCP Bad register packets.                                    |
| <b>Rx Intf disabled</b>                | Number of PIM control packets received on an interface that has PIM disabled.                                             |
| <b>Rx V1 Require V2</b>                | Number of PIM version 1 control packets received on an interface configured for PIM version 2.                            |
| <b>Rx V2 Require V1</b>                | Number of PIM version 2 control packets received on an interface configured for PIM version 1.                            |
| <b>Rx Register not RP</b>              | Number of PIM register packets received when the router is not the RP for the group.                                      |
| <b>Rx Register no route</b>            | Number of PIM register packets received when the RP does not have a unicast route back to the source.                     |
| <b>Rx Register no decap if</b>         | Number of PIM register packets received when the RP does not have a de-encapsulation interface.                           |
| <b>Null Register Timeout</b>           | Number of NULL register timeout packets.                                                                                  |
| <b>RP Filtered Source</b>              | Number of PIM packets received when the router has a source address filter configured for the RP.                         |
| <b>Rx Unknown Reg Stop</b>             | Number of register stop messages received with an unknown type.                                                           |
| <b>Rx Join/Prune no state</b>          | Number of join and prune messages received for which the router has no state.                                             |
| <b>Rx Join/Prune on upstream if</b>    | Number of join and prune messages received on the interface used to reach the upstream router, toward the RP.             |
| <b>Rx Join/Prune for invalid group</b> | Number of join or prune messages received for invalid multicast group addresses.                                          |



Table 277: show pim statistics Output Fields (*continued*)

| Field Name                            | Field Description                                                                                                                                           |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Rx Join/Prune messages dropped</b> | Number of join and prune messages received and dropped.                                                                                                     |
| <b>Rx sparse join for dense group</b> | Number of PIM sparse mode join messages received for a group that is configured for dense mode.                                                             |
| <b>Rx Graft/Graft Ack no state</b>    | Number of graft and graft acknowledgment messages received for which the router or switch has no state.                                                     |
| <b>Rx Graft on upstream if</b>        | Number of graft messages received on the interface used to reach the upstream router, toward the RP.                                                        |
| <b>Rx CRP not BSR</b>                 | Number of BSR messages received in which the PIM message type is Candidate-RP-Advertisement, not Bootstrap.                                                 |
| <b>Rx BSR when BSR</b>                | Number of BSR messages received in which the PIM message type is Bootstrap.                                                                                 |
| <b>Rx BSR not RPF if</b>              | Number of BSR messages received on an interface that is not the RPF interface.                                                                              |
| <b>Rx unknown hello opt</b>           | Number of PIM hello packets received with options that Junos OS does not support.                                                                           |
| <b>Rx data no state</b>               | Number of PIM control packets received for which the router has no state for the data type.                                                                 |
| <b>Rx RP no state</b>                 | Number of PIM control packets received for which the router has no state for the RP.                                                                        |
| <b>Rx aggregate</b>                   | Number of PIM aggregate MDT packets received.                                                                                                               |
| <b>Rx malformed packet</b>            | Number of PIM control packets received with a malformed IP unicast or multicast address family.                                                             |
| <b>No RP</b>                          | Number of PIM control packets received with no RP address.                                                                                                  |
| <b>No register encaps if</b>          | Number of PIM register packets received when the first-hop router does not have an encapsulation interface.                                                 |
| <b>No route upstream</b>              | Number of PIM control packets received when the router does not have a unicast route to the the interface used to reach the upstream router, toward the RP. |
| <b>Nexthop Unusable</b>               | Number of PIM control packets with an unusable nexthop. A path can be unusable if the route is hidden or the link is down.                                  |
| <b>RP mismatch</b>                    | Number of PIM control packets received for which the router has an RP mismatch.                                                                             |



Table 277: show pim statistics Output Fields (*continued*)

| Field Name                                 | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>RP mode mismatch</b>                    | RP mode (sparse or bidirectional) mismatches encountered when processing join and prune messages.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>RPF neighbor unknown</b>                | Number of PIM control packets received for which the router has an unknown RPF neighbor for the source.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Rx Joins/Prunes filtered</b>            | The number of join and prune messages filtered because of configured route filters and source address filters.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Tx Joins/Prunes filtered</b>            | The number of join and prune messages filtered because of configured route filters and source address filters.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Embedded-RP invalid addr</b>            | Number of packets received with an invalid embedded RP address in PIM join messages and other types of messages sent between routing domains.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Embedded-RP limit exceed</b>            | Number of times the limit configured with the <b>maximum-rps</b> statement is exceeded. The <b>maximum-rps</b> statement limits the number of embedded RPs created in a specific routing instance. The range is from 1 through 500. The default is 100.                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Embedded-RP added</b>                   | <p>Number of packets in which the embedded RP for IPv6 is added.</p> <p>The following receive events trigger extraction of an IPv6 embedded RP address on the router:</p> <ul style="list-style-type: none"> <li>• Multicast Listener Discovery (MLD) report for an embedded RP multicast group address</li> <li>• PIM join message with an embedded RP multicast group address</li> <li>• Static embedded RP multicast group address associated with an interface</li> <li>• Packets sent to an embedded RP multicast group address received on the DR</li> </ul> <p>An embedded RP node discovered through these receive events is added if it does not already exist on the routing platform.</p> |
| <b>Embedded-RP removed</b>                 | Number of packets in which the embedded RP for IPv6 is removed. The embedded RP is removed whenever all PIM join states using this RP are removed or the configuration changes to remove the embedded RP feature.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Rx Register msgs filtering drop</b>     | Number of received register messages dropped because of a filter configured for PIM register messages.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Tx Register msgs filtering drop</b>     | Number of register messages dropped because of a filter configured for PIM register messages.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Rx Bidir Join/Prune on non-Bidir if</b> | Error counter for join and prune messages received on non-bidirectional PIM interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |



Table 277: show pim statistics Output Fields (*continued*)

| Field Name                              | Field Description                                                                                                                                                                   |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Rx Bidir Join/Prune on non-DF if</b> | Error counter for join and prune messages received on non-designated forwarder interfaces.                                                                                          |
| <b>V4 (S,G) Maximum</b>                 | Maximum number of (S,G) IPv4 multicast routes accepted for the VPN routing and forwarding (VRF) routing instance. If this number is met, additional (S,G) entries are not accepted. |
| <b>V4 (S,G) Accepted</b>                | Number of accepted (S,G) IPv4 multicast routes.                                                                                                                                     |
| <b>V4 (S,G) Threshold</b>               | Threshold at which a warning message is logged (percentage of the maximum number of (S,G) IPv4 multicast routes accepted by the device).                                            |
| <b>V4 (S,G) Log Interval</b>            | Time (in seconds) between consecutive log messages.                                                                                                                                 |
| <b>V6 (S,G) Maximum</b>                 | Maximum number of (S,G) IPv6 multicast routes accepted for the VPN routing and forwarding (VRF) routing instance. If this number is met, additional (S,G) entries are not accepted. |
| <b>V6 (S,G) Accepted</b>                | Number of accepted (S,G) IPv6 multicast routes.                                                                                                                                     |
| <b>V6 (S,G) Threshold</b>               | Threshold at which a warning message is logged (percentage of the maximum number of (S,G) IPv6 multicast routes accepted by the device).                                            |
| <b>V6 (S,G) Log Interval</b>            | Time (in seconds) between consecutive log messages.                                                                                                                                 |
| <b>V4 (grp-prefix, RP) Maximum</b>      | Maximum number of group-to-rendezvous point (RP) IPv4 multicast mappings accepted for the VRF routing instance. If this number is met, additional mappings are not accepted.        |
| <b>V4 (grp-prefix, RP) Accepted</b>     | Number of accepted group-to-RP IPv4 multicast mappings.                                                                                                                             |
| <b>V4 (grp-prefix, RP) Threshold</b>    | Threshold at which a warning message is logged (percentage of the maximum number of group-to-RP IPv4 multicast mappings accepted by the device).                                    |
| <b>V4 (grp-prefix, RP) Log Interval</b> | Time (in seconds) between consecutive log messages.                                                                                                                                 |
| <b>V6 (grp-prefix, RP) Maximum</b>      | Maximum number of group-to RP IPv6 multicast mappings accepted for the VRF routing instance. If this number is met, additional mappings are not accepted.                           |
| <b>V6 (grp-prefix, RP) Accepted</b>     | Number of accepted group-to-RP IPv6 multicast mappings.                                                                                                                             |



Table 277: show pim statistics Output Fields (*continued*)

| Field Name                              | Field Description                                                                                                                                                                                 |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>V6 (grp-prefix, RP) Threshold</b>    | Threshold at which a warning message is logged (percentage of the maximum number of group-to-RP IPv6 multicast mappings accepted by the device).                                                  |
| <b>V6 (grp-prefix, RP) Log Interval</b> | Time (in seconds) between consecutive log messages.                                                                                                                                               |
| <b>V4 Register Maximum</b>              | Maximum number of IPv4 PIM registers accepted for the VRF routing instance. If this number is met, additional PIM registers are not accepted.<br><br>You configure the register limits on the RP. |
| <b>V4 Register Accepted</b>             | Number of accepted IPv4 PIM registers.                                                                                                                                                            |
| <b>V4 Register Threshold</b>            | Threshold at which a warning message is logged (percentage of the maximum number of IPv4 PIM registers accepted by the device).                                                                   |
| <b>V4 Register Log Interval</b>         | Time (in seconds) between consecutive log messages.                                                                                                                                               |
| <b>V6 Register Maximum</b>              | Maximum number of IPv6 PIM registers accepted for the VRF routing instance. If this number is met, additional PIM registers are not accepted.<br><br>You configure the register limits on the RP. |
| <b>V6 Register Accepted</b>             | Number of accepted IPv6 PIM registers.                                                                                                                                                            |
| <b>V6 Register Threshold</b>            | Threshold at which a warning message is logged (percentage of the maximum number of IPv6 PIM registers accepted by the device).                                                                   |
| <b>V6 Register Log Interval</b>         | Time (in seconds) between consecutive log messages.                                                                                                                                               |



## Sample Output

show pim statistics

```

user@host> show pim statistics
PIM Message type      Received      Sent  Rx errors
V2 Hello               15           32      0
V2 Register            0          362      0
V2 Register Stop      483           0      0
V2 Join Prune         18          518      0
V2 Bootstrap           0            0      0
V2 Assert              0            0      0
V2 Graft               0            0      0
V2 Graft Ack           0            0      0
V2 Candidate RP        0            0      0
V2 State Refresh       0            0      0
V2 DF Election         0            0      0
V1 Query               0            0      0
V1 Register            0            0      0
V1 Register Stop       0            0      0
V1 Join Prune          0            0      0
V1 RP Reachability     0            0      0
V1 Assert              0            0      0
V1 Graft               0            0      0
V1 Graft Ack           0            0      0
AutoRP Announce        0            0      0
AutoRP Mapping          0            0      0
AutoRP Unknown type    0            0      0
Anycast Register       0            0      0
Anycast Register Stop  0            0      0

Global Statistics

Hello dropped on neighbor policy  0
Unknown type                       0
V1 Unknown type                   0
Unknown Version                   0
Neighbor unknown                  0
Bad Length                        0
Bad Checksum                      0
Bad Receive If                   0
Rx Bad Data                       0
Rx Intf disabled                  0
Rx V1 Require V2                  0
Rx V2 Require V1                  0
Rx Register not RP                0
Rx Register no route              0
Rx Register no decap if           0
Null Register Timeout             0
RP Filtered Source                0
Rx Unknown Reg Stop               0
Rx Join/Prune no state            0
Rx Join/Prune on upstream if      0
Rx Join/Prune for invalid group   5
Rx Join/Prune messages dropped    0
Rx sparse join for dense group    0
Rx Graft/Graft Ack no state       0
Rx Graft on upstream if           0
Rx CRP not BSR                   0
Rx BSR when BSR                  0
Rx BSR not RPF if                0
Rx unknown hello opt              0

```



|                                     |   |
|-------------------------------------|---|
| Rx data no state                    | 0 |
| Rx RP no state                      | 0 |
| Rx aggregate                        | 0 |
| Rx malformed packet                 | 0 |
| Rx illegal TTL                      | 0 |
| Rx illegal destination address      | 0 |
| No RP                               | 0 |
| No register encap if                | 0 |
| No route upstream                   | 0 |
| Nexthop Unusable                    | 0 |
| RP mismatch                         | 0 |
| RP mode mismatch                    | 0 |
| RPF neighbor unknown                | 0 |
| Rx Joins/Prunes filtered            | 0 |
| Tx Joins/Prunes filtered            | 0 |
| Embedded-RP invalid addr            | 0 |
| Embedded-RP limit exceed            | 0 |
| Embedded-RP added                   | 0 |
| Embedded-RP removed                 | 0 |
| Rx Register msgs filtering drop     | 0 |
| Tx Register msgs filtering drop     | 0 |
| Rx Bidir Join/Prune on non-Bidir if | 0 |
| Rx Bidir Join/Prune on non-DF if    | 0 |

## Sample Output

```
show pim statistics
inet interface
<interface-name>
```

```
user@host> show pim statistics inet interface ge-0/3/0.0
Instance: PIM.master Family: INET
```

PIM Interface statistics for ge-0/3/0.0

| PIM Message type      | Received | Sent | Rx errors |
|-----------------------|----------|------|-----------|
| V2 Hello              | 0        | 4    | 0         |
| V2 Register           | 0        | 0    | 0         |
| V2 Register Stop      | 0        | 0    | 0         |
| V2 Join Prune         | 0        | 0    | 0         |
| V2 Bootstrap          | 0        | 0    | 0         |
| V2 Assert             | 0        | 0    | 0         |
| V2 Graft              | 0        | 0    | 0         |
| V2 Graft Ack          | 0        | 0    | 0         |
| V2 Candidate RP       | 0        | 0    | 0         |
| V1 Query              | 0        | 0    | 0         |
| V1 Register           | 0        | 0    | 0         |
| V1 Register Stop      | 0        | 0    | 0         |
| V1 Join Prune         | 0        | 0    | 0         |
| V1 RP Reachability    | 0        | 0    | 0         |
| V1 Assert             | 0        | 0    | 0         |
| V1 Graft              | 0        | 0    | 0         |
| V1 Graft Ack          | 0        | 0    | 0         |
| AutoRP Announce       | 0        | 0    | 0         |
| AutoRP Mapping        | 0        | 0    | 0         |
| AutoRP Unknown type   | 0        |      |           |
| Anycast Register      | 0        | 0    | 0         |
| Anycast Register Stop | 0        | 0    | 0         |

## Sample Output

```
show pim statistics
inet6 interface
```

```
user@host> show pim statistics inet6 interface ge-0/3/0.0
Instance: PIM.master Family: INET6
```



<interface-name> PIM Interface statistics for ge-0/3/0.0

| PIM Message type      | Received | Sent | Rx errors |
|-----------------------|----------|------|-----------|
| V2 Hello              | 0        | 4    | 0         |
| V2 Register           | 0        | 0    | 0         |
| V2 Register Stop      | 0        | 0    | 0         |
| V2 Join Prune         | 0        | 0    | 0         |
| V2 Bootstrap          | 0        | 0    | 0         |
| V2 Assert             | 0        | 0    | 0         |
| V2 Graft              | 0        | 0    | 0         |
| V2 Graft Ack          | 0        | 0    | 0         |
| V2 Candidate RP       | 0        | 0    | 0         |
| Anycast Register      | 0        | 0    | 0         |
| Anycast Register Stop | 0        | 0    | 0         |

show pim statistics  
instance  
<instance-name>

```
user@host> show pim statistics instance VPN-A
```

| PIM Message type      | Received | Sent | Rx errors |
|-----------------------|----------|------|-----------|
| V2 Hello              | 31       | 37   | 0         |
| V2 Register           | 0        | 0    | 0         |
| V2 Register Stop      | 0        | 0    | 0         |
| V2 Join Prune         | 0        | 16   | 0         |
| V2 Bootstrap          | 0        | 0    | 0         |
| V2 Assert             | 0        | 0    | 0         |
| V2 Graft              | 0        | 0    | 0         |
| V2 Graft Ack          | 0        | 0    | 0         |
| V2 Candidate RP       | 0        | 0    | 0         |
| V2 State Refresh      | 0        | 0    | 0         |
| V2 DF Election        | 0        | 0    | 0         |
| V1 Query              | 0        | 0    | 0         |
| V1 Register           | 0        | 0    | 0         |
| V1 Register Stop      | 0        | 0    | 0         |
| V1 Join Prune         | 0        | 0    | 0         |
| V1 RP Reachability    | 0        | 0    | 0         |
| V1 Assert             | 0        | 0    | 0         |
| V1 Graft              | 0        | 0    | 0         |
| V1 Graft Ack          | 0        | 0    | 0         |
| AutoRP Announce       | 0        | 0    | 0         |
| AutoRP Mapping        | 0        | 0    | 0         |
| AutoRP Unknown type   | 0        |      |           |
| Anycast Register      | 0        | 0    | 0         |
| Anycast Register Stop | 0        | 0    | 0         |

#### Global Statistics

|                                  |   |
|----------------------------------|---|
| Hello dropped on neighbor policy | 0 |
| Unknown type                     | 0 |
| V1 Unknown type                  | 0 |
| Unknown Version                  | 0 |
| Neighbor unknown                 | 0 |
| Bad Length                       | 0 |
| Bad Checksum                     | 0 |
| Bad Receive If                   | 0 |
| Rx Bad Data                      | 0 |
| Rx Intf disabled                 | 0 |
| Rx V1 Require V2                 | 0 |
| Rx V2 Require V1                 | 0 |
| Rx Register not RP               | 0 |
| Rx Register no route             | 0 |
| Rx Register no decap if          | 0 |
| Null Register Timeout            | 0 |
| RP Filtered Source               | 0 |



|                                     |     |
|-------------------------------------|-----|
| Rx Unknown Reg Stop                 | 0   |
| Rx Join/Prune no state              | 0   |
| Rx Join/Prune on upstream if        | 0   |
| Rx Join/Prune for invalid group     | 0   |
| Rx Join/Prune messages dropped      | 0   |
| Rx sparse join for dense group      | 0   |
| Rx Graft/Graft Ack no state         | 0   |
| Rx Graft on upstream if             | 0   |
| Rx CRP not BSR                      | 0   |
| Rx BSR when BSR                     | 0   |
| Rx BSR not RPF if                   | 0   |
| Rx unknown hello opt                | 0   |
| Rx data no state                    | 0   |
| Rx RP no state                      | 0   |
| Rx aggregate                        | 0   |
| Rx malformed packet                 | 0   |
| Rx illegal TTL                      | 0   |
| Rx illegal destination address      | 0   |
| No RP                               | 0   |
| No register encap if                | 0   |
| No route upstream                   | 28  |
| Nexthop Unusable                    | 0   |
| RP mismatch                         | 0   |
| RP mode mismatch                    | 0   |
| RPF neighbor unknown                | 0   |
| Rx Joins/Prunes filtered            | 0   |
| Tx Joins/Prunes filtered            | 0   |
| Embedded-RP invalid addr            | 0   |
| Embedded-RP limit exceed            | 0   |
| Embedded-RP added                   | 0   |
| Embedded-RP removed                 | 0   |
| Rx Register msgs filtering drop     | 0   |
| Tx Register msgs filtering drop     | 0   |
| Rx Bidir Join/Prune on non-Bidir if | 0   |
| Rx Bidir Join/Prune on non-DF if    | 0   |
| V4 (S,G) Maximum                    | 10  |
| V4 (S,G) Accepted                   | 9   |
| V4 (S,G) Threshold                  | 80  |
| V4 (S,G) Log Interval               | 80  |
| V6 (S,G) Maximum                    | 8   |
| V6 (S,G) Accepted                   | 8   |
| V6 (S,G) Threshold                  | 50  |
| V6 (S,G) Log Interval               | 100 |
| V4 (grp-prefix, RP) Maximum         | 100 |
| V4 (grp-prefix, RP) Accepted        | 5   |
| V4 (grp-prefix, RP) Threshold       | 80  |
| V4 (grp-prefix, RP) Log Interval    | 10  |
| V6 (grp-prefix, RP) Maximum         | 20  |
| V6 (grp-prefix, RP) Accepted        | 0   |
| V6 (grp-prefix, RP) Threshold       | 90  |
| V6 (grp-prefix, RP) Log Interval    | 20  |
| V4 Register Maximum                 | 100 |
| V4 Register Accepted                | 10  |
| V4 Register Threshold               | 80  |
| V4 Register Log Interval            | 10  |
| V6 Register Maximum                 | 20  |
| V6 Register Accepted                | 0   |
| V6 Register Threshold               | 90  |
| V6 Register Log Interval            | 20  |



## Sample Output

```
show pim statistics
interface
<interface-name>
```

```
user@host> show pim statistics interface ge-0/3/0.0
```

```
Instance: PIM.master Family: INET
```

```
PIM Interface statistics for ge-0/3/0.0
```

| PIM Message type      | Received | Sent | Rx errors |
|-----------------------|----------|------|-----------|
| V2 Hello              | 0        | 3    | 0         |
| V2 Register           | 0        | 0    | 0         |
| V2 Register Stop      | 0        | 0    | 0         |
| V2 Join Prune         | 0        | 0    | 0         |
| V2 Bootstrap          | 0        | 0    | 0         |
| V2 Assert             | 0        | 0    | 0         |
| V2 Graft              | 0        | 0    | 0         |
| V2 Graft Ack          | 0        | 0    | 0         |
| V2 Candidate RP       | 0        | 0    | 0         |
| V1 Query              | 0        | 0    | 0         |
| V1 Register           | 0        | 0    | 0         |
| V1 Register Stop      | 0        | 0    | 0         |
| V1 Join Prune         | 0        | 0    | 0         |
| V1 RP Reachability    | 0        | 0    | 0         |
| V1 Assert             | 0        | 0    | 0         |
| V1 Graft              | 0        | 0    | 0         |
| V1 Graft Ack          | 0        | 0    | 0         |
| AutoRP Announce       | 0        | 0    | 0         |
| AutoRP Mapping        | 0        | 0    | 0         |
| AutoRP Unknown type   | 0        |      |           |
| Anycast Register      | 0        | 0    | 0         |
| Anycast Register Stop | 0        | 0    | 0         |

```
Instance: PIM.master Family: INET6
```

```
PIM Interface statistics for ge-0/3/0.0
```

| PIM Message type      | Received | Sent | Rx errors |
|-----------------------|----------|------|-----------|
| V2 Hello              | 0        | 3    | 0         |
| V2 Register           | 0        | 0    | 0         |
| V2 Register Stop      | 0        | 0    | 0         |
| V2 Join Prune         | 0        | 0    | 0         |
| V2 Bootstrap          | 0        | 0    | 0         |
| V2 Assert             | 0        | 0    | 0         |
| V2 Graft              | 0        | 0    | 0         |
| V2 Graft Ack          | 0        | 0    | 0         |
| V2 Candidate RP       | 0        | 0    | 0         |
| Anycast Register      | 0        | 0    | 0         |
| Anycast Register Stop | 0        | 0    | 0         |



## show system statistics igmp

|                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                         | show system statistics igmp                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Syntax (EX Series Switches)</b>    | show system statistics igmp<br><all-members><br><local><br><member <i>member-id</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Syntax (TX Matrix Router)</b>      | show system statistics igmp<br><all-chassis   all-lcc   lcc <i>number</i>   scc>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Syntax (TX Matrix Plus Router)</b> | show system statistics igmp<br><all-chassis   all-lcc   lcc <i>number</i>   sfc <i>number</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>            | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br><b>sfc</b> option introduced for the TX Matrix Plus router in Junos OS Release 9.6.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>                    | Display system-wide Internet Group Management Protocol (IGMP) statistics.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                        | <p><b>none</b>—Display system statistics for IGMP.</p> <p><b>all-chassis</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) Display system statistics for IGMP for all the routers in the chassis.</p> <p><b>all-lcc</b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display system statistics for IGMP for all T640 routers (or line-card chassis) connected to the TX Matrix router. On a TX Matrix Plus router, display system statistics for IGMP for all T1600 routers (or line-card chassis) connected to the TX Matrix Plus router.</p> <p><b>all-members</b>—(EX4200 switches only) (Optional) Display IGMP statistics for all members of the Virtual Chassis configuration.</p> <p><b>lcc <i>number</i></b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display system statistics for IGMP for a specific T640 router that is connected to the TX Matrix router. On a TX Matrix Plus router, display system statistics for IGMP for a specific T1600 router that is connected to the TX Matrix Plus router. Replace <i>number</i> with a value from 0 through 3.</p> <p><b>local</b>—(EX4200 switches only) (Optional) Display IGMP statistics for the local Virtual Chassis member.</p> <p><b>member <i>member-id</i></b>—(EX4200 switches only) (Optional) Display IGMP statistics for the specified member of the Virtual Chassis configuration. Replace <i>member-id</i> with a value from 0 through 9.</p> <p><b>scc</b>—(TX Matrix routers only) (Optional) Display system statistics for IGMP for the TX Matrix router (or switch-card chassis).</p> |



**sfc number**—(TX Matrix Plus routers only) (Optional) Display system statistics for IGMP for the TX Matrix Plus router (or switch-fabric chassis). Replace *number* with 0.

**Additional Information** By default, when you issue the **show system statistics igmp** command on a TX Matrix or TX Matrix Plus master Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) or T1600 (in a routing matrix based on a TX Matrix Plus router) master Routing Engines connected to it. Likewise, if you issue the same command on the TX Matrix or TX Matrix Plus backup Routing Engine, the command is broadcast to all the T640 (in a routing matrix based on a TX Matrix router) or T1600 (in a routing matrix based on a TX Matrix Plus router) backup Routing Engines that are connected to it.

**Required Privilege Level** view

**List of Sample Output** [show system statistics igmp on page 4065](#)  
[show system statistics igmp \(EX Series Switches\) on page 4065](#)  
[show system statistics igmp \(TX Matrix Plus Router\) on page 4065](#)



## Sample Output

show system statistics  
igmp

```
user@host> show system statistics igmp
igmp:
  17178 messages received
  0 messages received with too few bytes
  0 messages received with bad checksum
  0 membership queries received
  0 membership queries received with invalid field(s)
  0 membership reports received
  0 membership reports received with invalid field(s)
  0 membership reports received for groups to which we belong
  0 membership reports sent
```

show system statistics  
igmp (EX Series  
Switches)

```
user@host> show system statistics igmp
igmp:
  0 messages received
  0 messages received with too few bytes
  0 messages received with bad checksum
  0 membership queries received
  0 membership queries received with invalid fields
  0 membership reports received
  0 membership reports received with invalid fields
  0 membership reports received for groups to which we belong
  0 Membership reports sent
```

show system statistics  
igmp (TX Matrix Plus  
Router)

```
user@host> show system statistics igmp
sfc0-re0:
-----
igmp:
  0 messages received
  0 messages received with too few bytes
  0 messages received with bad checksum
  0 membership queries received
  0 membership queries received with invalid field(s)
  0 membership reports received
  0 membership reports received with invalid field(s)
  0 membership reports received for groups to which we belong
  0 membership reports sent
```

lcc0-re0:

```
-----
igmp:
  0 messages received
  0 messages received with too few bytes
  0 messages received with bad checksum
  0 membership queries received
  0 membership queries received with invalid field(s)
  0 membership reports received
  0 membership reports received with invalid field(s)
  0 membership reports received for groups to which we belong
  0 membership reports sent
```

lcc1-re0:

```
-----
igmp:
  0 messages received
  0 messages received with too few bytes
```



```
0 messages received with bad checksum
0 membership queries received
0 membership queries received with invalid field(s)
0 membership reports received
0 membership reports received with invalid field(s)
0 membership reports received for groups to which we belong
0 membership reports sent
```

lcc2-re0:

-----  
igmp:

```
0 messages received
0 messages received with too few bytes
0 messages received with bad checksum
0 membership queries received
0 membership queries received with invalid field(s)
0 membership reports received
0 membership reports received with invalid field(s)
0 membership reports received for groups to which we belong
0 membership reports sent
```

lcc3-re0:

-----  
igmp:

```
0 messages received
0 messages received with too few bytes
0 messages received with bad checksum
0 membership queries received
0 membership queries received with invalid field(s)
0 membership reports received
0 membership reports received with invalid field(s)
0 membership reports received for groups to which we belong
0 membership reports sent
```



## test msdp

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | test msdp (dependent-peers <i>prefix</i>   rpf-peer <i>originator</i> )<br><instance <i>instance-name</i> ><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | Find Multicast Source Discovery Protocol (MSDP) peers.                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <p><b>dependent-peers <i>prefix</i></b>—Find downstream dependent MSDP peers.</p> <p><b>rpf-peer <i>originator</i></b>—Find the MSDP reverse-path-forwarding (RPF) peer for the originator.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Find MDSP peers for the specified routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>List of Sample Output</b>    | <a href="#">test msdp dependent-peers on page 4067</a>                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                                                                                                  |

## Sample Output

```
test msdp
dependent-peers      user@host> test msdp dependent-peers 10.0.0.1/24
```







## PART 15

# Security

- [Overview on page 4071](#)
- [Configuration on page 4127](#)
- [Administration on page 4275](#)
- [Troubleshooting on page 4303](#)







## CHAPTER 46

# Overview

- [Firewall Filters on page 4071](#)
- [Policers on page 4096](#)
- [Port Security on page 4105](#)
- [Device Security on page 4125](#)

## Firewall Filters

---

- [Overview of Firewall Filters on page 4071](#)
- [Understanding Filter-Based Forwarding on page 4073](#)
- [Understanding How Firewall Filters Are Evaluated on page 4074](#)
- [Understanding How Firewall Filters Control Packet Flows on page 4076](#)
- [Understanding Firewall Filter Match Conditions on page 4077](#)
- [Firewall Filter Match Conditions and Actions on page 4080](#)
- [Understanding How a Firewall Filter Tests a Protocol on page 4090](#)
- [Understanding Firewall Filter Planning on page 4091](#)
- [Planning the Number of Firewall Filters to Create on page 4092](#)
- [Understanding Firewall Filter Processing Points for Bridged and Routed Packets on page 4094](#)
- [Applying Firewall Filters to Interfaces on page 4095](#)

## Overview of Firewall Filters

Firewall filters provide rules that define whether to accept or discard packets that are transiting an interface on a QFX Series product. If a packet is accepted, you can configure additional actions to perform on the packet, such as class-of-service (CoS) marking (grouping similar types of traffic together and treating each type of traffic as a class with its own level of service priority) and traffic policing (controlling the maximum rate of traffic sent or received). You configure firewall filters to determine whether to accept or discard a packet before it enters or exits any of these:

- Port
- VLAN



- Layer 3 (routed) interface
- Routed VLAN interface (RVI)

An *ingress* firewall filter is applied to packets that are entering an interface or VLAN, and an *egress* firewall filter is applied to packets that are exiting an interface or VLAN.



**NOTE:** Firewall filters are sometimes called *access control lists (ACLs)*.

- [Firewall Filter Types on page 4072](#)
- [Firewall Filter Components on page 4072](#)
- [Firewall Filter Processing on page 4073](#)

---

### Firewall Filter Types

The following firewall filter types are supported on the QFX Series:

- Port (Layer 2) firewall filter—Port firewall filters apply to Layer 2 traffic transiting system ports.
- VLAN firewall filter—VLAN firewall filters provide access control for packets that enter a VLAN, are bridged within a VLAN, or leave a VLAN.
- Router (Layer 3) firewall filter—You can apply a router firewall filter on IPv4 or IPv6 Layer 3 (routed) interfaces and routed VLAN interfaces (RVI). You can also apply a router firewall filter in the ingress direction (only) on a loopback interface, which filters traffic sent to the switch itself.



**NOTE:** You can apply a firewall filter to a management interface (for example, `me0`) on a QFX3500 device. You cannot apply a firewall filter to a management interface on a QFX3000-G or QFX3000-M system.

To apply a firewall filter:

1. Configure the firewall filter.
2. Apply the firewall filter to a port, VLAN, or router interface.



**NOTE:** You can apply only one firewall filter to a port, VLAN, or interface for a given direction. For example, for interface `ge-0/0/6.0`, you can apply one filter for the ingress direction and one for the egress direction.

---

### Firewall Filter Components

In a firewall filter, you first define the family address type (ethernet-switching or inet) and then define one or more terms that specify the filtering criteria and the action to take if a match occurs.



Each term consists of the following components:

- **Match conditions**—Specify values that a packet must contain to be considered a match. You can specify values for most fields in the IP, TCP, UDP, or ICMP headers. You can also match on interface names.
- **Action**—Specifies what to do if a packet matches the match conditions. A filter can accept, discard, or reject a matching packet and then perform additional actions, such as counting, classifying, and policing. If no action is specified for a term, the default is to accept the matching packet.

### Firewall Filter Processing

If there are multiple terms in a filter, the order of the terms is important. If a packet matches the first term, the switch executes the action defined by that term, and no other terms are evaluated. If the switch does not find a match between the packet and the first term, it compares the packet to the next term. If no match occurs between the packet and the second term, the system continues to compare the packet to each successive term in the filter until a match is found. If the packet does not match any terms in the filter, the switch discards the packet by default.

#### Related Documentation

- [Understanding Firewall Filter Planning on page 4091](#)
- [Understanding Firewall Filter Processing Points for Bridged and Routed Packets on page 4094](#)
- [Understanding How Firewall Filters Are Evaluated on page 4074](#)
- [Understanding Firewall Filter Match Conditions on page 4077](#)
- [Overview of Policers on page 4096](#)
- [Configuring Firewall Filters on page 4177](#)

### Understanding Filter-Based Forwarding

You can use firewall filters in conjunction with virtual routing instances to specify different routes for packets to travel in their networks. To set up this feature—called filter-based forwarding—you specify a filter and match criteria and then specify the virtual routing instance to send packets to.

You might want to use filter-based forwarding to route specific types of traffic through a firewall or other security device before the traffic continues on its path. You can also use filter-based forwarding to give certain types of traffic preferential treatment. For example, you might want to ensure that the highest-priority traffic is forwarded over a 40-Gigabit Ethernet link. You might also use filter-based forwarding to obtain more control over load balancing than dynamic routing protocols provide.



**NOTE:** You can create as many as 128 filters or terms that direct packets to a given virtual routing instance.



- Related Documentation**
- [Understanding Virtual Router Routing Instances on page 2316](#)
  - [Overview of Firewall Filters on page 4071](#)
  - [Example: Using Filter-Based Forwarding to Route Application Traffic to a Security Device on page 4127](#)

## Understanding How Firewall Filters Are Evaluated

A firewall filter consists of one or more terms, and the order of the terms within a filter is important. Before you configure firewall filters, you should understand how the QFX Series products evaluate the terms within a filter and how packets are evaluated against the terms.

When a firewall filter consists of a single term, the filter is evaluated as follows:

- If the packet matches all the conditions, the action in the **then** statement is taken.
- If the packet matches all the conditions, and no action is specified in the **then** statement, the default action **accept** is taken.
- If the packet does not match all the conditions, the switch discards it.

When a firewall filter consists of more than one term, the filter is evaluated sequentially:

1. The packet is evaluated against the conditions in the **from** statement in the first term.
2. If the packet matches all the conditions in the term, the action in the **then** statement is taken and the evaluation ends. Subsequent terms in the filter are not evaluated.
3. If the packet does not match all the conditions in the term, the packet is evaluated against the conditions in the **from** statement in the second term.

This process continues until the packet matches all the conditions in the **from** statement in one of the subsequent terms or there are no more terms in the filter.

4. If a packet passes through all the terms in the filter without a match, the switch discards it.




**NOTE:** The order of conditions in a **from** statement is not important because a packet must match all the conditions to be considered a match.

---

Figure 145 on page 4075 shows how QFX Series products evaluate the terms within a firewall filter.



Figure 145: Evaluation of Terms Within a Firewall Filter

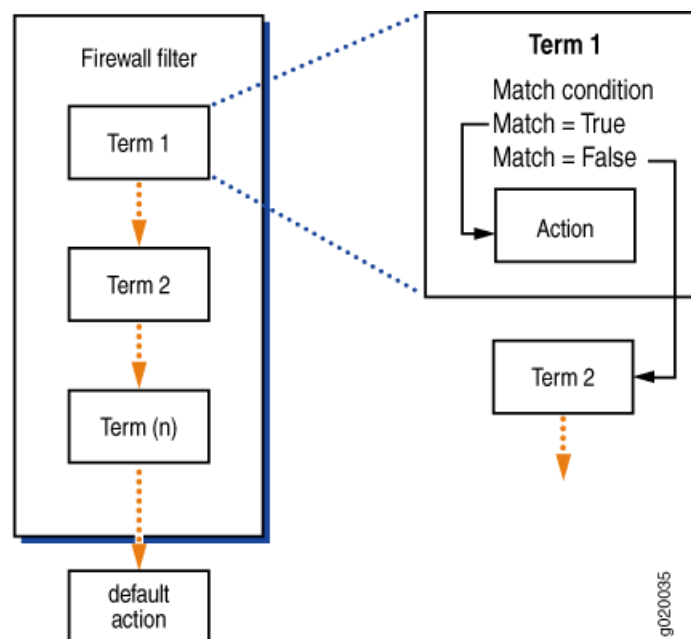

If you do not include a **from** statement in a term, all packets will match the term and be processed by the **then** statement. If a term does not contain a **then** statement or if an action has not been configured in the **then** statement, the term accepts any matching packets.

Every firewall filter contains an implicit **deny** statement at the end of the filter, which is equivalent to the following explicit filter term:

```
term implicit-rule {
  then discard;
}
```

Consequently, a packet that does not match any of the terms in a firewall filter is discarded. If you configure a filter that has no terms, all packets that pass through the filter are discarded.



**NOTE:** Firewall filtering is supported on packets that are at least 64 bytes long.

#### Related Documentation

- [Overview of Firewall Filters on page 4071](#)
- [Understanding Firewall Filter Match Conditions on page 4077](#)
- [Overview of Policers on page 4096](#)
- [Configuring Firewall Filters on page 4177](#)



## Understanding How Firewall Filters Control Packet Flows

A switch supports firewall filters that allow you to control flows of data packets and local packets. *Data packets* transit a switch as they are forwarded from a source to a destination. *Local packets* are destined for or sent by a Routing Engine (they do not transit a switch). Local packets usually contain routing protocol data, data for IP services such as Telnet or SSH, or data for administrative protocols such as the Internet Control Message Protocol (ICMP).


Firewall filters affect packet flows entering into or exiting from a switch as follows:

- Ingress firewall filters affect the flow of data packets that are received on switch interfaces. When a switch receives a data packet, the Packet Forwarding Engine in the system that contains the ingress interface determines where to forward the packet by looking in its Layer 2 or Layer 3 forwarding table for the best route to the destination. Data packets are forwarded to an egress interface. Locally destined packets are forwarded to the Routing Engine.
- Egress firewall filters affect data packets that are transiting a switch but do not affect packets sent by the Routing Engine. These filters are applied by the Packet Forwarding Engine in the system that contains the egress interface.

Figure 146 on page 4076 illustrates the application of ingress and egress firewall filters to control the flow of packets through a switch:

1. Ingress firewall filter applied to locally destined packets that are received on switch interfaces and are destined for the Routing Engine.
2. Ingress firewall filter applied to data packets that are received on switch interfaces and will transit the switch.
3. Egress firewall filter applied to data packets that are transiting the switch.

Figure 146: Application of Firewall Filters to Control Packet Flow

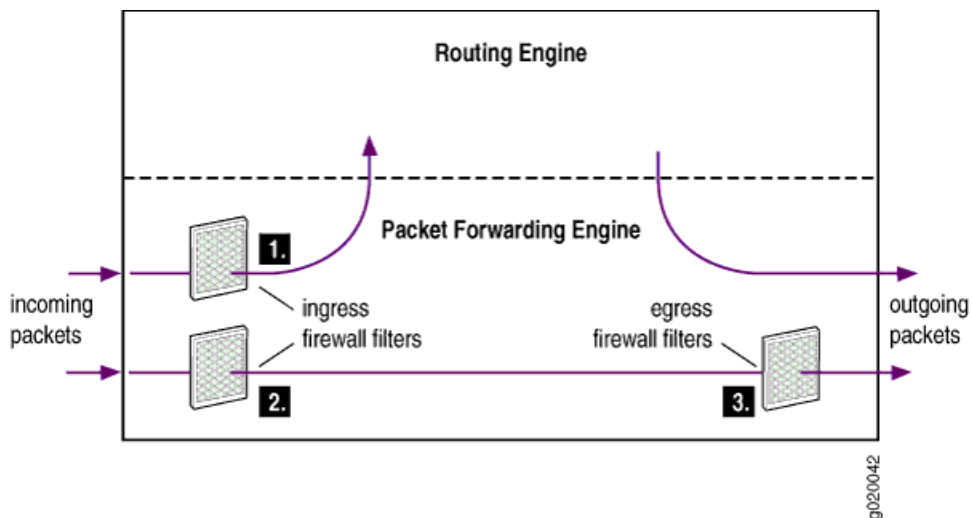



## Related Documentation

- [Understanding Firewall Filter Processing Points for Bridged and Routed Packets on page 4094](#)
- [Understanding How Firewall Filters Are Evaluated on page 4074](#)
- [Configuring Firewall Filters on page 4177](#)

## Understanding Firewall Filter Match Conditions

Before you define terms for firewall filters, you must understand how the conditions in a term are handled and how to specify interface, numeric, address, and bit-field filter match conditions to achieve the desired filter results.

- [Filter Match Conditions on page 4077](#)
- [Numeric Filter Match Conditions on page 4077](#)
- [Interface Filter Match Conditions on page 4078](#)
- [IP Address Filter Match Conditions on page 4078](#)
- [MAC Address Filter Match Conditions on page 4079](#)
- [Bit-Field Filter Match Conditions on page 4079](#)

### Filter Match Conditions

In the **from** statement of a firewall filter term, you specify the conditions that the packet must match for the action in the **then** statement to be taken. All conditions must match for the action to be implemented. The order in which you specify match conditions is not important, because a packet must match all the conditions in a term for a match to occur.

If you specify multiple values for the same condition, a match on any one of those values matches that condition. For example, if you specify multiple IP source addresses using the **source-address** statement, a packet that contains any one of those IP source addresses matches the condition. In some cases you can specify multiple values for the same condition by enclosing the possible values in square brackets, as in:

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set protocol (icmp | udp)
```

In other cases you must enter multiple statements, as in:

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set source-address 10.1.1.1
user@switch# set source-address 10.1.1.2
```

If you specify no match conditions in a term, that term matches all packets.



**NOTE:** Unlike traditional Junos OS firewall filters, you cannot use **except** in a condition statement to negate the condition.

### Numeric Filter Match Conditions

You can specify numeric filter match conditions that are identified by a numeric value, such as port and protocol numbers. For numeric filter match conditions, you specify the



condition and a single value that a field in a packet must contain to be considered a match.

You can specify the numeric value in one of the following ways:

- Single number—A match occurs if the value of the field matches the number. For example, to match Telnet traffic:

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set source-port 23
```

- Text synonym for a single number—A match occurs if the value of the field matches the number that corresponds to the synonym. For example, to match Telnet traffic:

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set source-port telnet
```

- To specify multiple values for the same match condition in a filter term, enter each value in its own match statement. For example, a match occurs in the following term if the value of the source port in the packet is 22 or 23.

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set source-port 22
user@switch# set source-port 23
```

---

### Interface Filter Match Conditions

You can specify an interface filter match condition to match an interface on which a packet is received or transmitted. For example, if you apply a filter to a VLAN you might want the filter to match on some interfaces that participate in the VLAN and not match on other interfaces in the VLAN. When you specify the name of the interface, you must include a logical unit.

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set interface ge-0/0/6.0
```

In this example, the final character (0) specifies the logical unit. You can include the wildcard (\*) as part of the interface name. For example:

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set interface ge-0/*/6.0
user@switch# set interface ge-0/1/*0
user@switch# set interface ge-0/0/6.*
```

Note that you must specify a value or a wildcard for the logical unit.

---

### IP Address Filter Match Conditions

You can specify an address filter match condition to match an IP source or destination address or prefix in a packet. Specify the address or prefix type and the address or prefix itself. For example:

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set destination-address 10.2.1.0/24;
```

If you omit the prefix length, it defaults to /32. For example:

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set destination-address 10
[edit firewall family family-name filter filter-name term term-name from]
user@switch# show
destination-address {
```



```
10.0.0.0/32;
}
```

To specify more than one IP address or prefix in a filter term, enter each address or prefix in its own match statement. For example, a match occurs in the following term if the source address of a packet matches either of the following prefixes:

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set source-address 10.1.0.0/16
user@switch# set source-address 10.2.0.0/16
```

### MAC Address Filter Match Conditions

You can specify a MAC address filter match condition to match a source or destination MAC address. You specify the address type and value that a packet must contain to be considered a match.

You can specify the MAC address as six hexadecimal bytes in any of the following formats:

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set destination-mac-address 00:11:22:33:44:55
```

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set destination-mac-address 0011.2233.4455
```

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set destination-mac-address 001122334455
```

Regardless of the formats you use, the system resolves the address to the standard format, in this case 00:11:22:33:44:55.

To specify more than one MAC address in a filter term, enter each MAC address in its own match statement. For example, a match occurs in the following term if the value of the MAC source address matches either of the following addresses:

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set source-mac-address 00:11:22:33:44:55
user@switch# set source-mac-address 00:11:22:33:20:15
```

### Bit-Field Filter Match Conditions

You can specify bit-field filter match conditions to match particular bits within certain fields in Ethernet frames and IP, TCP, UDP, and ICMP headers. You usually specify the field and the bit within the field that must be set in a packet to be considered a match.

In most cases you can use a keyword to specify the bit you want to match on. For example, to match on a TCP SYN packet you can enter **syn**, as in:

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set tcp-flags syn
```

You can also enter **0x02** because the SYN bit is the third least-significant bit of the 8-bit tcp-flags field:

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set tcp-flags 0x02
```

To match multiple bit-field values, use the logical operators, which are described in [Table 278 on page 4080](#). The operators are listed in order from highest precedence to lowest precedence. Operations are evaluated from left to right.



Table 278: Actions for Firewall Filters

| Logical Operators | Description |
|-------------------|-------------|
| !                 | Negation    |
| &                 | Logical AND |
|                   | Logical OR  |

If you use a logical operator, enclose the values in quotation marks and do not include any spaces. For example, the following statement matches the second packet of a TCP handshake:

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set tcp-flags "syn&ack"
```

To negate a match, precede the value with an exclamation point. For example, the following statement matches only the initial packet of a TCP handshake:

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set tcp-flags "syn!ack"
```

You can use text synonyms to specify some common bit-field matches. For example, the following statement also matches the initial packet of a TCP handshake:

```
[edit firewall family family-name filter filter-name term term-name from]
user@switch# set tcp-initial
```

#### Related Documentation

- [Overview of Firewall Filters on page 4071](#)
- [Understanding How a Firewall Filter Tests a Protocol on page 4090](#)
- [Firewall Filter Match Conditions and Actions on page 4080](#)
- [Configuring Firewall Filters on page 4177](#)

## Firewall Filter Match Conditions and Actions

Each term in a firewall filter consists of *match conditions* and an *action*. Match conditions are the fields and values that a packet must contain to be considered a match. You can define single or multiple match conditions in *match statements*. You can also include no match statement, in which case the term matches all packets.

When a packet matches a filter, a switch takes the action specified in the term. In addition, you can specify action modifiers to count, mirror, rate-limit, and classify packets. If no match conditions are specified for the term, the switch accepts the packet by default.

This topic describes the various match conditions, actions, and action modifiers that you can define in a firewall filter.

- [Table 279 on page 4081](#) describes the match conditions you can specify when configuring a firewall filter. Some of the numeric range and bit-field match conditions allow you to specify a text synonym. To see a list of all the synonyms for a match condition, type ? at the appropriate place in a statement.



- [Table 280 on page 4088](#) shows the actions that you can specify in a term.
- [Table 281 on page 4088](#) shows the action modifiers you can use to count, mirror, rate-limit, and classify packets.

Table 279: Supported Match Conditions for Firewall Filters

| Match Condition                                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Direction and Interface                                                                                                                       |
|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>destination-address</b><br><i>ip-address</i>   | IP destination address field, which is the address of the final destination node.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Ingress ports, VLANs, IPv4 (inet) interfaces, and IPv6 (inet6) interfaces.<br><br>Egress IPv4 (inet) interfaces, and IPv6 (inet6) interfaces. |
| <b>destination-mac-address</b> <i>mac-address</i> | Destination media access control (MAC) address of the packet.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Ingress ports, VLANs and IPv4 (inet) interfaces.<br><br>Egress ports and VLANs.                                                               |
| <b>destination-port</b> <i>value</i>              | TCP or UDP destination port field. Typically, you specify this match in conjunction with the <b>protocol</b> match statement. For the following well-known ports you can specify text synonyms (the port numbers are also listed):<br><br><b>afs</b> (1483), <b>bgp</b> (179), <b>biff</b> (512), <b>bootpc</b> (68), <b>bootps</b> (67),<br><br><b>cmd</b> (514), <b>cvspserver</b> (2401),<br><br><b>dhcp</b> (67), <b>domain</b> (53),<br><br><b>eklogin</b> (2105), <b>ekshell</b> (2106), <b>exec</b> (512),<br><br><b>finger</b> (79), <b>ftp</b> (21), <b>ftp-data</b> (20), | Ingress ports, VLANs, IPv4 (inet) interfaces, and IPv6 (inet6) interfaces.<br><br>Egress IPv4 (inet) interfaces.                              |



Table 279: Supported Match Conditions for Firewall Filters (*continued*)

| Match Condition                                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Direction and Interface                                                                                                                             |
|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                   | <p>http (80), https (443),</p> <p>ident (113), imap (143),</p> <p>kerberos-sec (88), klogin (543), kpasswd (761), krb-prop (754), krbupdate (760), kshell (544),</p> <p>ldap (389), login (513),</p> <p>mobileip-agent (434), mobilip-mn (435), msdp (639),</p> <p>netbios-dgm (138), netbios-ns (137), netbios-ssn (139), nfsd (2049), nntp (119), ntalk (518), ntp (123),</p> <p>pop3 (110), pptp (1723), printer (515),</p> <p>radacct (1813), radius (1812), rip (520), rkinit (2108),</p> <p>smtp (25), snmp (161), snmptrap (162), snpp (444), socks (1080), ssh (22), sunrpc (111), syslog (514),</p> <p>tacacs-ds (65), talk (517), telnet (23), tftp (69), timed (525),</p> <p>who (513),</p> <p>xdmcp (177),</p> <p>zephyr-clt (2103), zephyr-hm (2104)</p> |                                                                                                                                                     |
| <b>destination-prefix-list</b> <i>prefix-list</i> | IP destination prefix list field. You can define a list of IP address prefixes under a prefix-list alias for frequent use. Define this list at the [edit policy-options] hierarchy level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <p>Ingress ports, VLANs, IPv4 (inet) interfaces, and IPv6 (inet6) interfaces.</p> <p>Egress IPv4 (inet) interfaces and IPv6 (inet6) interfaces.</p> |
| <b>dot1q-tag</b> <i>number</i>                    | 802.1Q VLAN ID field in the Ethernet frame. The tag values can be 1–4094.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <p>Ingress ports and VLANs.</p> <p>Egress ports and VLANs (<i>Number</i> must be the VLAN ID of the VLAN you want to match).</p>                    |



Table 279: Supported Match Conditions for Firewall Filters (*continued*)

| Match Condition                          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Direction and Interface                                                                        |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| <b>dot1q-user-priority <i>number</i></b> | <p>802.1Q priority field in the Ethernet frame (used for class-of-service priorities). Values can be 0–7.</p> <p>In place of the numeric value, you can specify one of the following text synonyms (the field values are also listed):</p> <ul style="list-style-type: none"> <li>• <b>best-effort (0)</b>—Best effort</li> <li>• <b>background (1)</b>—Background</li> <li>• <b>standard (2)</b>—Standard or spare</li> <li>• <b>excellent-load (3)</b>—Excellent load</li> <li>• <b>controlled-load (4)</b>—Controlled load</li> <li>• <b>video (5)</b>—Video</li> <li>• <b>voice (6)</b>—Voice</li> <li>• <b>network-control (7)</b>—Network control reserved traffic</li> </ul>                                                                                                                                                                                      | <p>Ingress ports and VLANs.</p> <p>Egress ports and VLANs.</p>                                 |
| <b>dscp <i>value</i></b>                 | <p>Differentiated Services code point (DSCP). The DiffServ protocol uses the type-of-service (ToS) byte in the IP header. The most-significant 6 bits of this byte form the DSCP.</p> <p>You can specify DSCP in hexadecimal, binary, or decimal form.</p> <p>In place of the numeric value, you can specify one of the following text synonyms (the field values are also listed):</p> <ul style="list-style-type: none"> <li>• <b>ef (46)</b>—as defined in <a href="#">RFC 3246</a>, <i>An Expedited Forwarding PHB</i>.</li> <li>• <b>af11 (10), af12 (12), af13 (14); af21 (18), af22 (20), af23 (22); af31 (26), af32 (28), af33 (30); af41 (34), af42 (36), af43 (38)</b></li> </ul> <p>These four classes, with three drop precedences in each class, for a total of 12 code points, are defined in <a href="#">RFC 2597</a>, <i>Assured Forwarding PHB</i>.</p> | <p>Ingress ports, VLANs, and IPv4 (inet) interfaces.</p> <p>Egress IPv4 (inet) interfaces.</p> |



Table 279: Supported Match Conditions for Firewall Filters (*continued*)

| Match Condition                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Direction and Interface  |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| <b>ether-type value</b>          | Ethernet type field of a packet. The EtherType value specifies what protocol is being transported in the Ethernet frame. In place of the numeric value, you can specify one of the following text synonyms (the field values are also listed): <ul style="list-style-type: none"> <li>• <b>aarp (0x80F3)</b>—EtherType value AARP</li> <li>• <b>appletalk (0x809B)</b>—EtherType value AppleTalk</li> <li>• <b>arp (0x0806)</b>—EtherType value ARP</li> <li>• <b>fcoe (0x8906)</b>—EtherType value FCoE</li> <li>• <b>fip (0x8914)</b>—EtherType value FIP</li> <li>• <b>ipv4 (0x0800)</b>—EtherType value IPv4</li> <li>• <b>mpls-multicast (0x8848)</b>—EtherType value MPLS multicast</li> <li>• <b>mpls-unicast (0x8847)</b>—EtherType value MPLS unicast</li> <li>• <b>oam (0x88A8)</b>—EtherType value OAM</li> <li>• <b>ppp (0x880B)</b>—EtherType value PPP</li> <li>• <b>pppoe-discovery (0x8863)</b>—EtherType value PPPoE Discovery Stage</li> <li>• <b>pppoe-session (0x8864)</b>—EtherType value PPPoE Session Stage</li> <li>• <b>sna (0x80D5)</b>—EtherType value SNA</li> </ul> | Ingress ports and VLANs. |
| <b>ether-type list-of-values</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Egress ports and VLANs.  |
| <b>fragment-flags value</b>      | IP fragmentation flags. In place of the numeric value, you can specify one of the following text synonyms (the hexadecimal values are also listed): <ul style="list-style-type: none"> <li>• <b>is-fragment</b></li> <li>• <b>dont-fragment (0x4000)</b></li> <li>• <b>more-fragments (0x2000)</b></li> <li>• <b>reserved (0x8000)</b></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Ingress ports and VLANs. |



Table 279: Supported Match Conditions for Firewall Filters (*continued*)

| Match Condition        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Direction and Interface                                                                                                 |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>icmp-code value</b> | <p>ICMP code field. Because the meaning of the value depends upon the associated <b>icmp-type</b>, you must specify a value for <b>icmp-type</b> along with a value for <b>icmp-code</b>. In place of the numeric value, you can specify one of the following text synonyms (the field values are also listed). The keywords are grouped by the ICMP type with which they are associated:</p> <ul style="list-style-type: none"> <li>parameter-problem—ip-header-bad (0), required-option-missing (1)</li> <li>redirect—redirect-for-network (0), redirect-for-host (1), redirect-for-tos-and-net (2), redirect-for-tos-and-host (3)</li> <li>time-exceeded—ttl-eq-zero-during-reassembly (1), ttl-eq-zero-during-transit (0)</li> <li>unreachable—network-unreachable (0), host-unreachable (1), protocol-unreachable (2), port-unreachable (3), fragmentation-needed (4), source-route-failed (5), destination-network-unknown (6), destination-host-unknown (7), source-host-isolated (8), destination-network-prohibited (9), destination-host-prohibited (10), network-unreachable-for-TOS (11), host-unreachable-for-TOS (12), communication-prohibited-by-filtering (13), host-precedence-violation (14), precedence-cutoff-in-effect (15)</li> </ul> | <p>Ingress ports, VLANs, IPv4 (inet) interfaces, and IPv6 (inet6) interfaces.</p> <p>Egress IPv4 (inet) interfaces.</p> |
| <b>icmp-type value</b> | <p>ICMP message type field. Typically, you specify this match in conjunction with the <b>protocol</b> match statement to determine which protocol is being used on the port. In place of the numeric value, you can specify one of the following text synonyms (the field values are also listed):</p> <p>echo-reply (0), destination unreachable (3), source-quench (4), redirect (5), echo-request (8), IPv4 (inet)-advertisement (9), IPv4 (inet)-solicit (10), time-exceeded (11), parameter-problem (12), timestamp (13), timestamp-reply (14), info-request (15), info-reply (16), mask-request (17), mask-reply (18)</p> <p>See also <b>icmp-code variable</b>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <p>Ingress ports, VLANs, IPv4 (inet) interfaces, and IPv6 (inet6) interfaces.</p> <p>Egress IPv4 (inet) interfaces.</p> |



Table 279: Supported Match Conditions for Firewall Filters (*continued*)

| Match Condition                            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Direction and Interface                                                                                                                      |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>interface</b> <i>interface-name</i>     | Interface on which the packet is received, including the logical unit. You can include the wildcard character (*) as part of an interface name or logical unit.<br><br><b>NOTE:</b> An interface from which a packet is sent cannot be used as a match condition.                                                                                                                                                                                                                                                                                                            | Ingress ports, VLANs, IPv4 (inet) interfaces, and IPv6 (inet6) interfaces.<br><br>Egress IPv4 (inet) interfaces and IPv6 (inet6) interfaces. |
| <b>ip-options</b>                          | Specify <b>any</b> to create a match if anything is specified in the options field in the IP header.                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Ingress ports, VLANs, and IPv4 (inet) interfaces.<br><br>Egress IPv4 (inet) interfaces.                                                      |
| <b>is-fragment</b>                         | Using this condition causes a match if the More Fragments flag is enabled in the IP header or if the fragment offset is not zero.                                                                                                                                                                                                                                                                                                                                                                                                                                            | Ingress ports, VLANs, and IPv4 (inet) interfaces.<br><br>Egress IPv4 (inet) interfaces.                                                      |
| <b>l2-encap-type llc-non-snap</b>          | Match on logical link control (LLC) layer packets for non-Subnet Access Protocol (SNAP) Ethernet Encapsulation type.                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Ingress ports and VLANs.<br><br>Egress ports and VLANs.                                                                                      |
| <b>precedence value</b>                    | IP precedence bits in the type-of-service (ToS) byte in the IP header. (This byte can also be used for the DiffServ DSCP.) In place of the numeric value, you can specify one of the following text synonyms (the numeric values are also listed):<br><br><ul style="list-style-type: none"> <li>• <b>routine</b> (0)</li> <li>• <b>priority</b> (1)</li> <li>• <b>immediate</b> (2)</li> <li>• <b>flash</b> (3)</li> <li>• <b>flash-override</b> (4)</li> <li>• <b>critical-ecp</b> (5)</li> <li>• <b>internet-control</b> (6)</li> <li>• <b>net-control</b> (7)</li> </ul> | Ingress ports, VLANs, and IPv4 (inet) interfaces.<br><br>Egress IPv4 (inet) interfaces.                                                      |
| <b>protocol type</b>                       | IPv4 protocol value. In place of the numeric value, you can specify one of the following text synonyms (the numeric values are also listed):<br><br><b>icmp (1), igmp (2), ipip (4), tcp (6), egp (8), udp (17), rsvp (46), gre (47), esp (50), ah (51), ospf (89), pim (103), vrrp (112), sctp (132)</b>                                                                                                                                                                                                                                                                    | Ingress ports, VLANs, and IPv4 (inet) interfaces.<br><br>Egress IPv4 (inet) interfaces.                                                      |
| <b>source-address</b><br><b>ip-address</b> | IP source address field, which is the address of the node that sent the packet.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Ingress ports, VLANs, IPv4 (inet) interfaces, and IPv6 (inet6) interfaces..<br><br>Egress IPv4 (inet) interfaces.                            |



Table 279: Supported Match Conditions for Firewall Filters (*continued*)

| Match Condition                                   | Description                                                                                                                                                                                                                                                                                                                                                         | Direction and Interface                                                                                      |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>source-mac-address</b> <i>mac-address</i>      | Source media access control (MAC) address of the packet.                                                                                                                                                                                                                                                                                                            | Ingress ports and VLANs.<br>Egress ports and VLANs.                                                          |
| <b>source-port</b> <i>value</i>                   | TCP or UDP source port. Typically, you specify this match in conjunction with the <b>protocol</b> match statement. In place of the numeric field, you can specify one of the text synonyms listed under <b>destination-port</b> .                                                                                                                                   | Ingress ports, VLANs, IPv4 (inet) interfaces, and IPv6 (inet6) interfaces.<br>Egress IPv4 (inet) interfaces. |
| <b>source-prefix-list</b> <i>prefix-list</i>      | IP source prefix list. You can define a list of IP address prefixes under a prefix-list alias for frequent use. Define this list at the <b>[edit policy-options]</b> hierarchy level.                                                                                                                                                                               | Ingress ports, VLANs, IPv4 (inet) interfaces, and IPv6 (inet6) interfaces.<br>Egress IPv4 (inet) interfaces. |
| <b>tcp-established</b>                            | Match packets of an established TCP connection. This condition matches packets other than those used to set up a TCP connection—that is, three-way handshake packets are not matched.<br><br>When you specify <b>tcp-established</b> , a switch does not implicitly verify that the protocol is TCP. You must also specify the <b>protocol tcp</b> match condition. | Ingress ports, VLANs, IPv4 (inet) interfaces, and IPv6 (inet6) interfaces.<br>Egress IPv4 (inet) interfaces. |
| <b>tcp-flags</b> <i>value</i>                     | One or more TCP flags:<br><ul style="list-style-type: none"> <li>• <b>ack</b> (0x10)</li> <li>• <b>fin</b> (0x01)</li> <li>• <b>push</b> (0x08)</li> <li>• <b>rst</b> (0x04)</li> <li>• <b>syn</b> (0x02)</li> <li>• <b>urgent</b> (0x20)</li> </ul>                                                                                                                | Ingress ports, VLANs, IPv4 (inet) interfaces, and IPv6 (inet6) interfaces.<br>Egress IPv4 (inet) interfaces. |
| <b>tcp-initial</b>                                | Match the first TCP packet of a connection. A match occurs when the TCP flag <b>SYN</b> is set and the TCP flag <b>ACK</b> is not set.<br><br>When you specify <b>tcp-initial</b> , a switch does not implicitly verify that the protocol is TCP. You must also specify the <b>protocol tcp</b> match condition.                                                    | Ingress ports, VLANs, IPv4 (inet) interfaces, and IPv6 (inet6) interfaces.<br>Egress IPv4 (inet) interfaces. |
| <b>ttl</b> <i>value</i>                           | IP Time-to-live (TTL) field in decimal. The value can be 1-255.                                                                                                                                                                                                                                                                                                     | Ingress IPv4 (inet) interfaces.<br>Egress IPv4 (inet) interfaces.                                            |
| <b>vlan</b> ( <i>vlan-name</i>   <i>vlan-id</i> ) | VLAN names or ID.                                                                                                                                                                                                                                                                                                                                                   | Ingress ports and VLANs.<br>Egress ports and VLANs.                                                          |



Use **then** statements to define actions that should occur if a packet matches all conditions in a **from** statement. [Table 280 on page 4088](#) shows the actions that you can specify in a term. (If you do not include a **then** statement, the system accepts packets that match the filter.)

Table 280: Actions for Firewall Filters

| Action                                | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>accept</b>                         | Accept a packet. This is the default action for packets that match a term.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>discard</b>                        | Discard a packet silently without sending an Internet Control Message Protocol (ICMP) message.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>reject message-type</b>            | <p>Discard a packet and send a “destination unreachable” ICMPv4 message (type 3). To log rejected packets, configure the <b>syslog</b> action modifier.</p> <p>You can specify one of the following message types: <b>administratively-prohibited</b> (default), <b>bad-host-tos</b>, <b>bad-network-tos</b>, <b>host-prohibited</b>, <b>host-unknown</b>, <b>host-unreachable</b>, <b>network-prohibited</b>, <b>network-unknown</b>, <b>network-unreachable</b>, <b>port-unreachable</b>, <b>precedence-cutoff</b>, <b>precedence-violation</b>, <b>protocol-unreachable</b>, <b>source-host-isolated</b>, <b>source-route-failed</b>, or <b>tcp-reset</b>.</p> <p>If you specify <b>tcp-reset</b>, the system sends a TCP reset if the packet is a TCP packet; otherwise nothing is sent.</p> <p>If you do not specify a message type, the ICMP notification “destination unreachable” is sent with the default message “communication administratively filtered.”</p> <p><b>NOTE:</b> The <b>reject</b> action is supported on ingress interfaces only.</p> |
| <b>routing-instance instance-name</b> | Forward matched packets to a virtual routing instance.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>routing-instance instance-name</b> | Forward matched packets to a virtual routing instance.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>vlan VLAN-name</b>                 | <p>Forward matched packets to a specific VLAN.</p> <p><b>NOTE:</b> The <b>vlan</b> action is supported on ingress interfaces only.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

You can also specify the action modifiers listed in [Table 281 on page 4088](#) to count, mirror, rate-limit, and classify packets.

Table 281: Action Modifiers for Firewall Filters

| Action Modifier               | Description                                                                                                                                                                                                                                   |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>analyzer analyzer-name</b> | <p>Mirror traffic (copy packets) to an analyzer configured at the <b>[edit ethernet-switching-options analyzer]</b> hierarchy level.</p> <p>You can specify port mirroring for ingress port, VLAN, and IPv4 (inet) firewall filters only.</p> |
| <b>count counter-name</b>     | Count the number of packets that match the term.                                                                                                                                                                                              |



Table 281: Action Modifiers for Firewall Filters (*continued*)

| Action Modifier                                              | Description                                                                                                                                                                                                                                                                                                                                                          |
|--------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>forwarding-class</b> <i>class</i>                         | <p>Classify the packet in one of the following forwarding classes:</p> <ul style="list-style-type: none"> <li>• <b>assured-forwarding</b></li> <li>• <b>best-effort</b></li> <li>• <b>expedited-forwarding</b></li> <li>• <b>network-control</b></li> </ul> <p><b>NOTE:</b> The <b>forwarding-class</b> action modifier is supported on ingress interfaces only.</p> |
| <b>log</b>                                                   | <p>Log the packet's header information in the Routing Engine. To view this information, enter the <b>show firewall log</b> operational mode command.</p> <p><b>NOTE:</b> The <b>log</b> action modifier is supported on ingress interfaces only.</p>                                                                                                                 |
| <b>loss-priority</b> (low   medium-low   medium-high   high) | <p>Set the packet loss priority (PLP).</p> <p><b>NOTE:</b> The <b>loss-priority</b> action modifier is supported on ingress interfaces only.</p> <p><b>NOTE:</b> The <b>loss-priority</b> action modifier is not supported in combination with the <b>policer</b> action.</p>                                                                                        |
| <b>policer</b> <i>policer-name</i>                           | <p>Send packets to a policer (for the purpose of applying rate limiting).</p> <p>You can specify a policer for ingress port, VLAN, and IPv4 (inet) firewall filters only.</p> <p><b>NOTE:</b> The <b>policer</b> action modifier is not supported in combination with the <b>loss-priority</b> action.</p>                                                           |
| <b>syslog</b>                                                | <p>Log an alert for this packet.</p> <p><b>NOTE:</b> The <b>syslog</b> action modifier is supported on ingress interfaces only.</p>                                                                                                                                                                                                                                  |
| <b>three-color-policer</b> <i>three-color-policer-name</i>   | <p>Send packets to a three-color policer (for the purpose of applying rate limiting).</p> <p>You can specify a three-color policer for ingress and egress port, VLAN, and IPv4 (inet) firewall filters.</p> <p><b>NOTE:</b> The <b>policer</b> action modifier is not supported in combination with the <b>loss-priority</b> action.</p>                             |

#### Related Documentation

- [Understanding Firewall Filter Match Conditions on page 4077](#)
- [Understanding How Firewall Filters Are Evaluated on page 4074](#)
- [Understanding How a Firewall Filter Tests a Protocol on page 4090](#)
- [Overview of Policers on page 4096](#)
- [Understanding Port Mirroring on page 4313](#)



- [Configuring Firewall Filters on page 4177](#)

## Understanding How a Firewall Filter Tests a Protocol

When examining match conditions in a firewall filter, a switch tests only the fields that you specify. It does not implicitly test any fields that you do not explicitly configure. For example, if you specify a match condition of **source-port ssh**, there is no implied test to determine if the protocol is TCP. In this case, the switch considers any packet that has a value of **22** (decimal) in the 2-byte field that follows a *presumed* IP header to be a match. To ensure that the term matches on TCP packets, you also specify a **protocol tcp** match condition.

For the following match conditions, you should explicitly specify the protocol match condition in the same term:

- **destination-port**—Specify **protocol tcp** or **protocol udp**.
- **icmp-code**—Specify **protocol icmp** and **icmp-type**.
- **icmp-type**—Specify **protocol tcp** or **protocol udp**.
- **source-port**—Specify **protocol tcp** or **protocol udp**.
- **tcp-flags**—Specify **protocol tcp**.

### Related Documentation

- [Overview of Firewall Filters on page 4071](#)
- [Understanding Firewall Filter Match Conditions on page 4077](#)
- [Configuring Firewall Filters on page 4177](#)



## Understanding Firewall Filter Planning

Before you create a firewall filter and apply it, determine what you want the filter to accomplish and how to use its match conditions and actions to achieve your goals. It is important that you understand how packets are matched, the default and configured actions of the firewall filter, and where to apply the firewall filter.

You can apply no more than one firewall filter per port, VLAN, or router interface per direction (input and output). For example, for a given port you can apply at most one filter in the input direction and one filter in the output direction. You should try to be conservative in the number of terms (rules) that you include in each firewall filter, because a large number of terms requires longer processing time during a commit operation and can make testing and troubleshooting more difficult.

Before you configure and apply firewall filters, answer the following questions for each of them:

1. What is the purpose of the filter?

For example, the system can drop packets based on header information, rate-limit traffic, classify packets into forwarding classes, log and count packets, or prevent denial-of-service attacks.

2. What are the appropriate match conditions? Determine the packet header fields that the packet must contain for a match. Possible fields include:

- Layer 2 header fields—Source and destination MAC addresses, 802.1Q tag, Ethernet type, or VLAN.
- Layer 3 header fields—Source and destination IP addresses, protocols, and IP options (IP precedence, IP fragmentation flags, or TTL type).
- TCP header fields—Source and destination ports and flags.
- ICMP header fields—Packet type and code.

3. What are the appropriate actions to take if a match occurs?

The system can accept, discard, or reject packets.

4. What additional action modifiers might be required?

For example, you can configure the system to mirror (copy) packets to a specified port, count matching packets, apply traffic management, or police packets.

5. On what port, router interface, or VLAN should the firewall filter be applied?

Start with the following basic guidelines:

- If packets entering or leaving a Layer 2 interface (port) need to be filtered, apply the filter at the **[edit family ethernet switching filter]** hierarchy level. This is a port filter.
- If packets entering or leaving any port in a specific VLAN need to be filtered, use a VLAN filter.



- If packets entering or leaving a Layer 3 (routed) interface or routed VLAN interface (RVI) need to be filtered, use a router firewall filter. Apply the filter to the interface at the **[edit family inet]** hierarchy level. You can also apply a router firewall filter on a loopback interface in the ingress direction.

Before you choose the interface or VLAN on which to apply a firewall filter, understand how that placement can affect traffic flow to other interfaces. In general, apply a filter close to the source device if the filter matches on source or destination IP addresses, IP protocols, or protocol information—such as ICMP message types, and TCP or UDP port numbers. However, you should apply a filter close to the destination device if the filter matches *only* on a source IP address. When you apply a filter too close to the source device, the filter could prevent that source device from accessing other services that are available on the network.



**NOTE:** Egress firewall filters do not affect the flow of locally generated control packets from the Routing Engine.

6. In which direction should the firewall filter be applied?

You typically configure different actions for traffic entering an interface than you configure for traffic exiting an interface.

7. How many filters should I create?

See “[Planning the Number of Firewall Filters to Create](#)” on page 4092 for information about how many firewall filters you can apply.

**Related  
Documentation**

- [Overview of Firewall Filters on page 4071](#)
- [Overview of Policers on page 4096](#)
- [Understanding How Firewall Filters Are Evaluated on page 4074](#)
- [Planning the Number of Firewall Filters to Create on page 4092](#)
- [Configuring Firewall Filters on page 4177](#)

## Planning the Number of Firewall Filters to Create

- [Understanding How Many Firewall Filters Are Supported on page 4092](#)
- [Egress Filters on page 4094](#)
- [Avoid Configuring too Many Filters on page 4094](#)

### Understanding How Many Firewall Filters Are Supported

---

QFX3500 and QFX3600 switches and Node devices support the following maximum number of firewall filter terms per type of attachment point:

- 768 terms for ingress filters
- 1024 terms for egress filters



These totals are applied in aggregate. That is, you can apply a total of 768 port filters, Layer 3 filters, and VLAN filters in the input direction and 1024 port filters, Layer 3 filters, and VLAN filters in the output direction. These maximum values also assume that each filter has only one term. If you create filters with multiple terms (including implicit terms), the maximum numbers of filters is reduced.



**NOTE:** If you want to create more than 512 egress VLAN filters, your first VLAN ID should be 6 and the subsequent VLAN IDs should increase by 1. For example, to create 1024 egress VLAN filters, the first VLAN ID would be 6, the second ID would be 7, and the sequence would continue through VLAN ID 1029. Similarly, if you want to create fewer than 512 egress VLAN filters but want the total number of terms in those filters to exceed 512, you should number your VLAN IDs in the same manner. If you do not use this approach to create your VLAN IDs, the total number of allowed terms or filters will be less than 1024 and might be 512.

The memory for filters is divided into slices that accommodate 256 filters (again assuming that there is one term per filter), and all the filters in a memory slice must be of the same type and applied in the same direction. A memory slice is reserved as soon as you apply a filter. For example, if you create a port filter and apply it in the input direction, a memory slice is reserved that will only store ingress port filters. If you create and apply only one ingress port filter, the rest of this slice is unused and is unavailable for other filter types.

Continuing with the above example, assume that you create and apply 256 ingress port filters with one term each so that one memory slice is filled. This leaves two more memory slices available for ingress filters. (Remember that the maximum number of ingress filters is 768.) If you then create and apply an ingress Layer 3 filter, another memory slice is reserved for ingress Layer 3 filters. As before, the rest of the slice is unused and is unavailable for different filter types. At this point there is one memory slice available for any ingress filter type.

Now assume that you create and apply a VLAN ingress filter. The final memory slice is reserved for VLAN ingress filters. Memory allocation for ingress filters (once again assuming one term per filter) is as follows:

- Slice 1: Filled with 256 ingress port filters. You cannot apply any more ingress port filters.
- Slice 2: Contains one ingress Layer 3 filter. You can apply 255 more ingress Layer 3 filters.
- Slice 3: Contains one ingress VLAN filter. You can apply 255 more ingress VLAN filters.

Here is another example. Assume that you create 257 ingress port filters with one term per filter—that is, you create one more term than a single memory slice can accommodate. When you apply the filters and commit the configuration, the filter memory allocation is:

- Slice 1: Filled with 256 ingress port filters. You cannot apply any more ingress port filters.
- Slice 2: Contains one ingress port filter. You can apply 255 more ingress port filters.



- Slice 3: This slice is unassigned. You can create and apply 256 ingress filters of any type (port, Layer 3, or VLAN), but all the filters must be of the same type.

### Egress Filters

---

All of the preceding principles also apply to egress filters, but four memory slices are used because IPv4 Layer 3 filters and IPv6 Layer 3 filters are stored in separate slices. The memory slices for egress filters are the same size as those for ingress filters, so the maximum number of egress filter terms is therefore 1024.

### Avoid Configuring too Many Filters

---

If you violate any of these restrictions and commit a configuration that is not in compliance, Junos OS rejects the excessive filters. For example, if you configure 300 ingress port filters and 300 ingress Layer 3 filters and try to commit the configuration, Junos OS does the following (again assuming one term per filter):

- Accepts the 300 ingress port filters (storing them in two memory slices).
- Accepts the first 256 ingress Layer 3 filters it processes (storing them in the third memory slice).
- Rejects the remaining 44 ingress Layer 3 filters.



**NOTE:** In this situation, be sure to delete excessive filters (for example, the remaining 44 ingress Layer 3 filters) from the configuration before you reboot the device. If you reboot a device that has a noncompliant configuration, you cannot predict which filters are installed after the reboot. Using the example above, the 44 ingress Layer 3 filters that were originally rejected might be installed, and 44 of the port filters that were originally accepted might be rejected.

---

#### Related Documentation

- [Overview of Firewall Filters on page 4071](#)
- [Understanding How Firewall Filters Are Evaluated on page 4074](#)
- [Understanding Firewall Filter Planning on page 4091](#)
- [Configuring Firewall Filters on page 4177](#)

## Understanding Firewall Filter Processing Points for Bridged and Routed Packets

You apply firewall filters at multiple processing points in the forwarding path. At each processing point, the action to be taken on a packet is determined by the configuration of the filter and the results of the lookup in the forwarding or routing table.

For both bridged (Layer 2) unicast packets and routed (Layer 3) unicast packets, firewall filters are applied in the prescribed order shown below (assuming that each filter is present and a packet is accepted by each one).



Bridged packets:

1. Ingress port filter
2. Ingress VLAN filter
3. Egress VLAN filter
4. Egress port filter

Routed packets:

1. Ingress port firewall filter
2. Ingress VLAN firewall filter (Layer 2 CoS)
3. Ingress router firewall filter (Layer 3 CoS)
4. Egress router firewall filter
5. Egress VLAN firewall filter
6. Egress port filter



**NOTE:** MAC learning occurs before filters are applied, so QFX Series products learn the MAC addresses of packets that are dropped by ingress filters.

#### Related Documentation

- [Overview of Firewall Filters on page 4071](#)
- [Understanding How Firewall Filters Control Packet Flows on page 4076](#)
- [Configuring Firewall Filters on page 4177](#)

## Applying Firewall Filters to Interfaces

For a firewall filter to work, you must apply it to at least one interface. To do this, include the **filter** statement when configuring a logical interface at the **[edit interfaces]** hierarchy level:

```
[edit interfaces]
user@switch# set interface-name unit logical-unit-number family family-name filter (input |
output) filter-name
```

In the **input** statement, specify a firewall filter to be evaluated when packets are received on the interface. Input filters applied to a loopback interface affect only traffic destined for the Routing Engine.

In the **output** statement, specify a filter to be evaluated when packets exit the interface. (You cannot apply an output filter to a loopback interface.)





**NOTE:** When you create a loopback interface, it is important to apply a filter to it so the Routing Engine is protected. We recommend that when you apply a filter to the loopback interface lo0, you include the `apply-groups` statement. Doing so ensures that the filter is automatically inherited on every loopback interface, including lo0 and other loopback interfaces.

---

**Related  
Documentation**

- [Configuring Firewall Filters on page 4177](#)

---

## Policers

---

- [Overview of Policers on page 4096](#)
- [Understanding Policers with Link Aggregation Groups on page 4100](#)
- [Understanding Color-Blind Mode for Single-Rate Tricolor Marking on page 4100](#)
- [Understanding Color-Aware Mode for Single-Rate Tricolor Marking on page 4101](#)
- [Understanding Color-Blind Mode for Two-Rate Tricolor Marking on page 4103](#)
- [Understanding Color-Aware Mode for Two-Rate Tricolor Marking on page 4103](#)

### Overview of Policers

A switch polices traffic by limiting the input or output transmission rate of a class of traffic according to user-defined criteria. Policing (or rate-limiting) traffic allows you to control the maximum rate of traffic sent or received on an interface and to provide multiple priority levels or classes of service.

- [Policer Overview on page 4096](#)
- [Policer Types on page 4097](#)
- [Policer Actions on page 4098](#)
- [Policer Colors on page 4098](#)
- [Suggested Naming Convention for Policers on page 4099](#)
- [Policer Counters on page 4099](#)
- [Policer Algorithms on page 4099](#)
- [How Many Policers are Supported? on page 4100](#)

---

### Policer Overview


---

You use policers to apply limits to traffic flow and set consequences for packets that exceed these limits—usually applying a higher loss priority—so that if packets encounter downstream congestion, they can be discarded first. Policers apply only to unicast packets.

Policers provide two functions: metering and marking. A policer meters (measures) each packet against traffic rates and burst sizes that you configure. It then passes the packet and the metering result to the marker, which assigns a packet loss priority that corresponds to the metering result. [Figure 147 on page 4097](#) illustrates this process.



Figure 147: Flow of Tricolor Marking Policer Operation

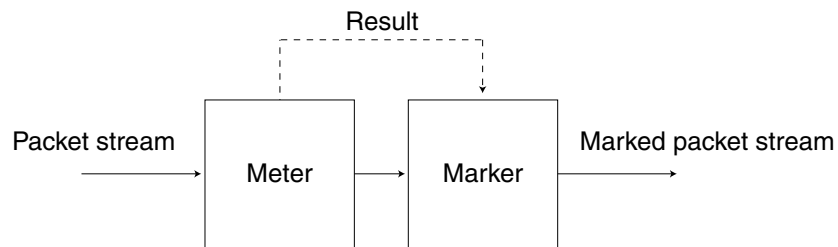

9017049

After you name and configure a policer, you use it by specifying it as an action in one or more firewall filters.

### Policer Types

A switch supports three types of policers:

- **Single-rate two-color marker**—A two-color policer (or “policer” when used without qualification) meters the traffic stream and classifies packets into two categories of packet loss priority (PLP) according to a configured bandwidth and burst-size limit. You can mark packets that exceed the bandwidth and burst-size limit with a specified PLP or simply discard them.

You can specify this type of policer in an ingress or egress firewall.



**NOTE:** A two-color policer is most useful for metering traffic at the port (physical interface) level.

- **Single-rate three-color marker**—This type of policer is defined in RFC 2697, *A Single Rate Three Color Marker*, as part of an assured forwarding (AF) per-hop-behavior (PHB) classification system for a Differentiated Services (DiffServ) environment. This type of policer meters traffic based on one rate—the configured committed information rate (CIR) as well as the committed burst size (CBS) and the excess burst size (EBS). The CIR specifies the average rate at which bits are admitted to the switch. The CBS specifies the usual burst size in bytes and the EBS specifies the maximum burst size in bytes. The EBS must be greater than or equal to the CBS, and neither can be 0.

You can specify this type of policer in an ingress or egress firewall.



**NOTE:** A single-rate three-color marker (TCM) is most useful when a service is structured according to packet length and not peak arrival rate.

- **Two-rate three-color marker**—This type of policer is defined in RFC 2698, *A Two Rate Three Color Marker*, as part of an assured forwarding per-hop-behavior classification system for a Differentiated Services environment. This type of policer meters traffic based on two rates—the CIR and peak information rate (PIR) along with their associated burst sizes, the CBS and peak burst size (PBS). The PIR specifies the maximum rate at which bits are admitted to the network and must be greater than or equal to the CIR.



You can specify this type of policer in an ingress or egress firewall.



**NOTE:** A two-rate three-color policer is most useful when a service is structured according to arrival rates and not necessarily packet length.

See [Table 282 on page 4098](#) for information about how metering results are applied for each of these policer types.

### Policer Actions

Policer actions are implicit or explicit and vary by policer type. *Implicit* means that Junos OS assigns the loss priority automatically. [Table 282 on page 4098](#) describes the policer actions.

**Table 282: Policer Actions**

| Policer                 | Marking                        | Implicit Action                  | Configurable Action |
|-------------------------|--------------------------------|----------------------------------|---------------------|
| Single-rate two-color   | Green (conforming)             | Assign low loss priority         | None                |
|                         | Red (nonconforming)            | None                             | Discard             |
| Single-rate three-color | Green (conforming)             | Assign low loss priority         | None                |
|                         | Yellow (above the CIR and CBS) | Assign medium-high loss priority | None                |
|                         | Red (above the EBS)            | Assign high loss priority        | Discard             |
| Two-rate three-color    | Green (conforming)             | Assign low loss priority         | None                |
|                         | Yellow (above the CIR and CBS) | Assign medium-high loss priority | None                |
|                         | Red (above the PIR and PBS)    | Assign high loss priority        | Discard             |



**NOTE:** If you specify a policer in an egress firewall filter, the only supported action is discard.

### Policer Colors

Single-rate and two-rate three-color policers can operate in two modes:



- **Color-blind**—In color-blind mode, the three-color policer assumes that all packets examined have not been previously marked or metered. In other words, the three-color policer is “blind” to any previous coloring a packet might have had.
- **Color-aware**—In color-aware mode, the three-color policer assumes that all packets examined have been previously marked or metered. In other words, the three-color policer is “aware” of the previous coloring a packet might have had. In color-aware mode, the three-color policer can increase the PLP of a packet but cannot decrease it. For example, if a color-aware three-color policer meters a packet with a medium PLP marking, it can raise the PLP level to high but cannot reduce the PLP level to low.

### Suggested Naming Convention for Policers

We recommend that you use the naming convention ***policertypeTCM#-color type*** when configuring three-color policers and ***policer#*** when configuring two-color policers. TCM stands for three-color marker. Because policers can be numerous and must be applied correctly to work, a simple naming convention makes it easier to apply the policers properly. For example, the first single-rate, color-aware three-color policer configured would be named **srTCM1-ca**. The second two-rate, color-blind three-color configured would be named **trTCM2-cb**. The elements of this naming convention are explained below:

- sr (single-rate)
- tr (two-rate)
- TCM (tricolor marking)
- 1 or 2 (number of marker)
- ca (color-aware)
- cb (color-blind)

### Policer Counters

Each policer that you configure includes an implicit counter that counts the number of packets that exceed the rate limits that are specified for the policer. If you use the same policer in multiple terms—either within the same filter or in different filters—the implicit counter counts all the packets that are policed in all of these terms. If you want to obtain separate packet counts for each term, use these options:

- Configure a unique policer for each term.
- Configure only one policer, but use a unique, explicit counter in each term.

### Policer Algorithms

Policing uses the *token-bucket algorithm*, which enforces a limit on average bandwidth while allowing bursts up to a specified maximum value. It offers more flexibility than the *leaky bucket algorithm* in allowing a certain amount of bursty traffic before it starts discarding packets.



### How Many Policers are Supported?

---

You can configure and commit the following numbers of policers on QFX3500 and QFX3600 devices when they are operating as standalone switches:

- Two-color policers used in ingress firewall filters: 768
- Three-color policers used in ingress firewall filters: 768
- Two-color policers used in egress firewall filters: 510
- Three-color policers used in egress firewall filters: 255

#### Related Documentation

- [Understanding Color-Blind Mode for Single-Rate Tricolor Marking on page 4100](#)
- [Understanding Color-Blind Mode for Two-Rate Tricolor Marking on page 4103](#)
- [Understanding Color-Aware Mode for Single-Rate Tricolor Marking on page 4101](#)
- [Understanding Color-Aware Mode for Two-Rate Tricolor Marking on page 4103](#)
- [Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183](#)

### Understanding Policers with Link Aggregation Groups

If you apply a policer to a link aggregation group (LAG) on a QFX3500 switch or node, the policer applies to all the interfaces in the LAG in aggregate. For example, if you configure a policer to rate-limit at 1 Gbps and apply the policer (by using a firewall filter) to a LAG that has two member interfaces on a single switch or node, the total allowed throughput for both members is 1 Gbps.

If you apply a policer to a LAG that has members on different nodes in a QFabric network Node group or redundant server Node group, the configured rate applies to the interface on each node. For example, if you configure a policer to rate-limit at 1 Gbps and apply the policer to a LAG that has one member on server node A and one member on server node B, the allowed throughput for each member is 1 Gbps, for a total allowed throughput of 2 Gbps.

#### Related Documentation

- [Overview of Policers on page 4096](#)
- [Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183](#)

### Understanding Color-Blind Mode for Single-Rate Tricolor Marking

With the color-blind mode of single-rate tricolor marking, all packets are evaluated against the CBS. If a packet exceeds the CBS, it is evaluated against the EBS. In color-blind mode, the policer supports three loss priorities only: low, medium-high, and high.

Packets that exceed the CBS but are below the EBS are marked yellow (medium-high). Packets that exceed the EBS are marked red (high), as shown in [Table 283 on page 4101](#).



Table 283: Color-Blind Mode TCM Color-to-PLP Mapping

| Color  | PLP         | Meaning                                                     |
|--------|-------------|-------------------------------------------------------------|
| Green  | low         | Conforming.                                                 |
| Yellow | medium-high | Packet exceeds the CIR and CBS but does not exceed the EBS. |
| Red    | high        | Packet exceeds the EBS.                                     |

- Related Documentation**
- [Overview of Policers on page 4096](#)
  - [Configuring Color-Blind Egress Policers for Medium-Low PLP on page 4182](#)

## Understanding Color-Aware Mode for Single-Rate Tricolor Marking

In color-aware mode, the treatment the packet receives depends on its classification. Marking can increase a preassigned PLP but cannot decrease it.

### Summary of PLP Changes

Table 284 on page 4101 shows how a packet's incoming priority can be modified with single-rate marking.

Table 284: Color-Aware Mode Single-Rate PLP Mapping

| Incoming PLP | Packet Metered Against      | Possible Cases                                              | Outgoing PLP |
|--------------|-----------------------------|-------------------------------------------------------------|--------------|
| low          | CIR, CBS, and EBS           | Conforming                                                  | low          |
|              |                             | Packet exceeds the CIR and CBS but does not exceed the EBS. | medium-high  |
|              |                             | Packet exceeds the EBS.                                     | high         |
| medium-low   | EBS only                    | Packet does not exceed the EBS.                             | medium-low   |
|              |                             | Packet exceeds the EBS.                                     | high         |
| medium-high  | EBS only                    | Packet does not exceed the EBS.                             | medium-high  |
|              |                             | Packet exceeds the EBS.                                     | high         |
| high         | Not metered by the policer. | All cases.                                                  | high         |

The following sections describe single-rate color-aware PLP mapping in more detail.

### Effect on Green Packets (Low PLP)

Packets belonging to the green class have already been marked by a classifier with low PLP. The marking policer can leave the PLP unchanged or increase it to medium-high or



high, so these packets are therefore metered against both the CBS and the EBS. For example, if a behavior aggregate or multifield classifier marks a packet with low PLP and the two-rate TCM policer is in color-aware mode, the output loss priority is as follows:

- If the rate of traffic flow is less than the CIR, packets remain marked as low PLP.
- If bursts exceed the CBS but not the EBS, some of the packets are marked as medium-high PLP, and some of the packets remain marked as low PLP.
- If bursts exceed the EBS, some of the packets are marked as high PLP, and some of the packets remain marked as low PLP.

#### ***Effect on Yellow Packets (Medium PLP)***

Packets belonging to the yellow class have already been marked by a classifier with medium-low or medium-high PLP. The marking policer can leave the PLP unchanged or increase it to high, so these packets are therefore metered against the EBS only. For example, if a behavior aggregate or multifield classifier marks a packet with medium-low PLP and the two-rate TCM policer is in color-aware mode, the output loss priority is as follows:

- If the rate of traffic flow is less than the CBS, the packets remain marked as medium-low PLP.
- If the rate of traffic flow is greater than the CBS but less than the EBS, the packets remain marked as medium-low PLP.
- If the rate of traffic flow is greater than the EBS, some of the packets are marked as high PLP and some remain marked as medium-low PLP.

If a BA or multifield classifier marks a packet with medium-high PLP and the two-rate TCM policer is in color-aware mode, the policer assigns output loss priority as follows:

- If the rate of traffic flow is less than the CBS, the packets remain marked as medium-high PLP.
- If the rate of traffic flow is greater than the CBS but less than the EBS, the packets remain marked as medium-high PLP.
- If the rate of traffic flow is greater than the EBS, some of the packets are marked as high PLP and some remain marked as medium-high PLP.

#### ***Effect on Red Packets (High PLP)***

Packets belonging to the red class have already been marked by a classifier with high PLP. Because the policer cannot decrease the PLP, it does not change it, and these packets are not metered against the CBS or the EBS.

#### **Related Documentation**

- [Overview of Policers on page 4096](#)
- [Configuring Color-Blind Egress Policers for Medium-Low PLP on page 4182](#)



## Understanding Color-Blind Mode for Two-Rate Tricolor Marking

With the color-blind mode of two-rate tricolor marking, all packets are evaluated against the committed information rate (CIR). If a packet exceeds the CIR, it is evaluated against the peak information rate (PIR). Packets that exceed the CIR but are below the PIR are marked yellow (medium-high). Packets that exceed the PIR are marked red (high).

**Table 285: Color-Blind Mode TCM Color-to-PLP Mapping**

| Color  | PLP                | Meaning                                             |
|--------|--------------------|-----------------------------------------------------|
| Green  | <b>low</b>         | Packet does not exceed the CIR.                     |
| Yellow | <b>medium-high</b> | Packet exceeds the CIR but does not exceed the PIR. |
| Red    | <b>high</b>        | Packet exceeds the PIR.                             |

### Related Documentation

- [Overview of Policers on page 4096](#)
- [Configuring Color-Blind Egress Policers for Medium-Low PLP on page 4182](#)

## Understanding Color-Aware Mode for Two-Rate Tricolor Marking

In color-aware mode, the treatment the packet receives depends on its classification. Marking can increase the preassigned PLP but cannot decrease it

### Summary of PLP Changes

Table 286 on page 4103 shows how a packet's incoming priority can be modified with two-rate marking.

**Table 286: Color-Aware Mode Two-Rate PLP Mapping**

| Incoming PLP       | Packet Metered Against | Possible Cases                          | Outgoing PLP       |
|--------------------|------------------------|-----------------------------------------|--------------------|
| <b>low</b>         | CIR and PIR            | Packet does not exceed the CIR.         | <b>low</b>         |
|                    |                        | Packet exceeds the CIR but not the PIR. | <b>medium-high</b> |
|                    |                        | Packet exceeds the PIR.                 | <b>high</b>        |
| <b>medium-low</b>  | PIR only               | Packet does not exceed the PIR.         | <b>medium-low</b>  |
|                    |                        | Packet exceeds the PIR.                 | <b>high</b>        |
| <b>medium-high</b> | PIR only               | Packet does not exceed the PIR.         | <b>medium-high</b> |
|                    |                        | Packet exceeds the PIR.                 | <b>high</b>        |



Table 286: Color-Aware Mode Two-Rate PLP Mapping (*continued*)

| Incoming PLP | Packet Metered Against      | Possible Cases | Outgoing PLP |
|--------------|-----------------------------|----------------|--------------|
| high         | Not metered by the policer. | All cases.     | high         |

The following sections describe color-aware two-rate PLP mapping in more detail.

#### Effect on Green Packets (Low PLP)

Packets belonging to the green class have already been marked by a classifier with low PLP. The marking policer can leave the packet's PLP unchanged or increase the PLP to medium-high or high. These packets are therefore metered against both the CIR and the PIR. For example, if a behavior aggregate or multifield classifier marks a packet with low PLP and the two-rate TCM policer is in color-aware mode, the output loss priority is as follows:

- If the rate of traffic flow is less than the CIR, the packets remain marked as low PLP.
- If the rate of traffic flow is greater than the CIR but less than the PIR, some of the packets are marked as medium-high PLP and some of the packets remain marked as low PLP.
- If the rate of traffic flow is greater than the PIR, some of the packets are marked as high PLP and some of the packets remain marked as low PLP.

#### Effect on Yellow Packets (Medium PLP)

Packets belonging to the yellow class have already been marked by a classifier with medium-low or medium-high PLP. The marking policer can leave the PLP unchanged or increase it to high. These packets are therefore metered against the PIR only. For example, if a behavior aggregate (BA) or multifield classifier marks a packet with medium-low PLP and the two-rate TCM policer is in color-aware mode, the policer assigns output loss priority as follows:

- If the rate of traffic flow is less than the CIR, the packets remain marked as medium-low PLP.
- If the rate of traffic flow is greater than the CIR but less than the PIR, the packets remain marked as medium-low PLP.
- If the rate of traffic flow is greater than the PIR, some of the packets are marked as high PLP and some of the packets remain marked as medium-low PLP.

If a BA or multifield classifier marks a packet with medium-high PLP and the two-rate TCM policer is in color-aware mode, the policer assigns output loss priority as follows:

- If the rate of traffic flow is less than the CIR, the packets remain marked as medium-high PLP.
- If the rate of traffic flow is greater than the CIR but less than the PIR, the packets remain marked as medium-high PLP.



- If the rate of traffic flow is greater than the PIR, some of the packets are marked as high PLP and some of the packets remain marked as medium-high PLP.

---

### Effect on Red Packets (High PLP)

Packets belonging to the red class have already been marked by a classifier with high PLP. Because the policer cannot decrease the PLP, it does not change it, and these packets are not metered against the CIR or the PIR.

#### Related Documentation

- [Overview of Policers on page 4096](#)
- [Configuring Color-Blind Egress Policers for Medium-Low PLP on page 4182](#)

---

## Port Security

- [Overview of Access Port Protection on page 4105](#)
- [Port Security Overview on page 4108](#)
- [Understanding DHCP Snooping for Port Security on page 4110](#)
- [Understanding DAI for Port Security on page 4117](#)
- [Understanding MAC Limiting and MAC Move Limiting for Port Security on page 4119](#)
- [Understanding Trusted and Untrusted Ports on page 4121](#)
- [Understanding Trusted DHCP Servers for Port Security on page 4121](#)
- [Understanding DHCP Option 82 for Port Security on page 4122](#)
- [Understanding Static ARP Entries on page 4124](#)

### Overview of Access Port Protection

Port security features can protect a switch against various types of attacks. Protection methods against some common attacks are:

- [Mitigation of Ethernet Switching Table Overflow Attacks on page 4105](#)
- [Mitigation of Rogue DHCP Server Attacks on page 4106](#)
- [Protection Against ARP Spoofing Attacks on page 4106](#)
- [Protection Against DHCP Snooping Database Alteration Attacks on page 4107](#)
- [Protection Against DHCP Starvation Attacks on page 4107](#)

---

### Mitigation of Ethernet Switching Table Overflow Attacks

In an overflow attack on an Ethernet switching table, an intruder sends so many requests from new MAC addresses that the table cannot learn all the addresses. The attack forces the switch to send broadcast messages when it needs to send traffic to addresses for which it lacks MAC addresses. In addition to generating unnecessary traffic, the attacker might be able to sniff the broadcast packets.

To mitigate such attacks, you can configure a limit for learned MAC addresses or allow only specific MAC addresses. Use the MAC limit feature to control the total number of MAC addresses that can be added to the Ethernet switching table for the specified



interface or interfaces. By setting the MAC addresses that are explicitly allowed, you ensure that the addresses of network devices whose network access is critical are guaranteed to be included in the Ethernet switching table.

### Mitigation of Rogue DHCP Server Attacks

---

By default, all access ports are untrusted, and all trunk ports are trusted with regard to DHCP. Trusted ports allow DHCP servers to provide IP addresses and other information to requesting devices. If someone connects an unauthorized DHCP server to a trusted port, the unauthorized server can start issuing IP addresses and configuration information to the network's DHCP clients. The information provided to the clients by this server can disrupt their network access. The unauthorized server might also assign itself as the default gateway device for the network. An attacker can then sniff the network traffic and perpetrate a man-in-the-middle attack—that is, it misdirects traffic intended for a legitimate network device to a device of its choice.

To mitigate this problem, set the interface to which the unauthorized server is connected as untrusted. That action blocks all ingress DHCP server messages from that interface.



**NOTE:** The switch logs all DHCP server packets that are received on untrusted ports. For example:

```
5 untrusted DHCPOFFER received, interface xe-0/0/2.0[65], vlan v1[10] server
ip/mac 12.12.12.1/00:00:00:00:01:12 offer ip/client mac
12.12.12.253/00:AA:BB:CC:DD:01
```

You can use these messages to detect unauthorized DHCP servers on the network.



**NOTE:** If you attach a DHCP server to an access port, you must configure the port as trusted.

---

### Protection Against ARP Spoofing Attacks

---

In ARP spoofing, an attacker sends faked ARP messages on the network. The attacker associates its own MAC address with the IP address of a network device connected to the switch. Any traffic sent to that IP address is instead sent to the attacker. Now the attacker can create various types of problems, including sniffing the packets that were meant for another host and perpetrating man-in-the-middle attacks. (In a man-in-the-middle attack, the attacker intercepts messages between two hosts, reads them, and perhaps alters them, all without the original hosts knowing that their communications have been compromised.)

To protect against ARP spoofing on your switch, enable both DHCP snooping and dynamic ARP inspection (DAI). DHCP snooping builds and maintains the DHCP snooping table. That table contains the MAC addresses, IP addresses, lease times, binding types, VLAN information, and interface information for the untrusted interfaces on the switch. DAI



uses the information in the DHCP snooping table to validate ARP packets. Invalid ARP packets are blocked, and when they are blocked, a system log message is recorded that includes the type of ARP packet and the sender's IP address and MAC address.

See [“Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks”](#) on page 4162.

### Protection Against DHCP Snooping Database Alteration Attacks

In an attack designed to alter the DHCP snooping database, an intruder introduces a DHCP client on one of the switch's untrusted access interfaces that has a MAC address identical to that of a client on another untrusted port. The intruder acquires the DHCP lease, which results in changes to the entries in the DHCP snooping table. Subsequently, what would have been valid ARP requests from the legitimate client are blocked.

To protect against this type of alteration of the DHCP snooping database, configure MAC addresses that are explicitly allowed on the interface. See [“Example: Configuring Allowed MAC Addresses to Protect the Switch from DHCP Snooping Database Alteration Attacks”](#) on page 4167.

### Protection Against DHCP Starvation Attacks

In a DHCP starvation attack, an attacker floods an Ethernet LAN with DHCP requests from spoofed (counterfeit) MAC addresses so that trusted DHCP servers cannot keep up with requests from legitimate DHCP clients. The address space of those servers is completely used up, so they can no longer assign IP addresses and lease times to clients. DHCP requests from those clients are either dropped—that is, the result is a denial of service (DoS)—or directed to a rogue DHCP server set up by the attacker to imitate a legitimate DHCP server.

To protect the switch from DHCP starvation attacks, use the MAC limiting feature. Specify the maximum number of MAC addresses that the switch can learn on the access interfaces to which DHCP clients connect. The DHCP server or servers can then supply only the specified number of IP addresses over each of those interfaces. If a DHCP starvation attack occurs after the maximum number of IP addresses has been assigned, the attack fails.

#### Related Documentation

- [Understanding MAC Limiting and MAC Move Limiting for Port Security](#) on page 4119
- [Configuring MAC Limiting](#) on page 4188
- [Verifying That MAC Limiting Is Working Correctly](#) on page 4280
- [Understanding DHCP Option 82 for Port Security](#) on page 4122
- [Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks](#) on page 4145
- [Understanding DAI for Port Security](#) on page 4117



## Port Security Overview

Ethernet LANs are vulnerable to attacks such as address spoofing (forging) and Layer 2 denial of service (DoS) on network devices. Port security features help protect the access ports on your switch against the loss of information and productivity that can result from such attacks.

Juniper Networks Junos operating system (Junos OS) provides features to help secure ports on the switch. Ports can be categorized as either trusted or untrusted. You apply policies appropriate to each category to protect ports against various types of attacks.

Basic port security features are enabled in the switch's default configuration. You can configure additional features with minimal configuration steps.

Depending on the particular feature, you can configure the feature either on:

- VLANs—A specific VLAN or all VLANs
- Interfaces—A specific interface or all interfaces



**NOTE:** If you configure one of the port security features on all VLANs or all interfaces, those port security features are thereby enabled on all VLANs or all interfaces that are not explicitly configured with other port security features.

However, if you explicitly configure one of the port security features on a specific VLAN or on a specific interface, you must explicitly configure any additional port security features that you want to apply to that VLAN or interface. Otherwise, the switch software automatically applies the default values for the other port security features.

For example, if you enable DHCP snooping on all VLANs and enable IP source guard (not supported on the QFX Series switch) only on a specific VLAN, you must also explicitly enable DHCP snooping on that specific VLAN. If you do not explicitly enable DHCP snooping on that VLAN, the default value of no DHCP snooping applies to it.

---

Port security features on switches are:

- DHCP option 82—Also known as the DHCP relay agent information option. This feature helps protect the switch against attacks such as spoofing of IP addresses and media access control (MAC) addresses and DHCP IP address starvation. Option 82 provides information about the network location of a DHCP client, and the DHCP server uses this information to implement IP addresses or other parameters for the client.
- DHCP snooping—Filters and blocks ingress DHCP server messages on untrusted ports; builds and maintains an IP address/MAC address binding database (called the DHCP snooping database). You enable this feature on VLANs.



- Dynamic ARP inspection (DAI)—Prevents ARP spoofing attacks. ARP requests and replies are compared against entries in the DHCP snooping database, and filtering decisions are made based on the results of those comparisons. You enable this feature on VLANs.
- IP source guard—Mitigates the effects of IP address spoofing attacks on the Ethernet LAN. With IP source guard enabled, the source IP address in the packet sent from an untrusted access interface is validated against the source MAC address in the DHCP snooping database. The packet is forwarded if the source IP address to source MAC address binding is valid; if the binding is not valid, the packet is discarded. You enable this feature on VLANs.



**NOTE:** IP source guard is not supported on the QFX Series.

- MAC limiting—Protects against flooding of the Ethernet switching table (also known as the MAC forwarding table or Layer 2 forwarding table). You can enable this feature on:
  - Access interfaces (ports)
  - Access interface based on its membership within a specific VLAN



**NOTE:** You can configure a MAC limit on a VLAN in the [edit vlans] hierarchy. However, configuring the MAC limit on a VLAN does not provide protection against flooding of the Ethernet switching table. When incoming packets exceed the MAC limit on a VLAN, the event is logged, but the packets are not dropped. No other action can be configured. Therefore, setting the MAC limit on a VLAN is not considered a port security feature.

- MAC move limiting—Tracks MAC movement and detects MAC spoofing on access ports. You enable this feature on VLANs.
- Persistent MAC learning—Also known as sticky MAC. Persistent MAC learning allows dynamically learned MAC addresses to persist through switch reboots. You enable this feature on interfaces.
- Trusted DHCP server—Configuring the DHCP server on a trusted port protects against rogue DHCP servers sending leases. You enable this feature on interfaces (ports). By default, access ports are untrusted, and trunk ports are trusted. (Access ports are the switch ports that connect to Ethernet endpoints such as user PCs and laptops, servers, and printers. Trunk ports are the switch ports that connect to other Ethernet switches or to routers.)

#### Related Documentation

- Security Features for EX Series Switches Overview
- [Understanding DHCP Snooping for Port Security on page 4110](#)
- [Understanding DAI for Port Security on page 4117](#)
- Understanding IP Source Guard for Port Security on EX Series Switches



- Understanding MAC Limiting and MAC Move Limiting for Port Security on EX Series Switches
- Understanding DHCP Option 82 for Port Security on EX Series Switches
- Understanding Persistent MAC Learning (Sticky MAC)
- Understanding How to Protect Access Ports on EX Series Switches from Common Attacks
- [Example: Configuring Basic Port Security Features on page 4136](#)

## Understanding DHCP Snooping for Port Security

DHCP snooping allows a switch to monitor and control DHCP messages received from untrusted devices connected to the switch. When DHCP snooping is enabled, the system snoops the DHCP messages to view DHCP lease information and build and maintain a database of valid IP address to MAC address (IP-MAC) bindings. This database is called the DHCP snooping database. Only clients with valid bindings are allowed access to the network.

- [DHCP Snooping Basics on page 4110](#)
- [DHCP Snooping Process on page 4111](#)
- [DHCP Server Access on page 4112](#)
- [DHCP Snooping Table on page 4115](#)
- [Static IP Address Additions to the DHCP Snooping Database on page 4115](#)
- [Snooping DHCP Packets That Have Invalid IP Addresses on page 4115](#)
- [Prioritizing Snooped Packets on page 4116](#)

---

### DHCP Snooping Basics

Dynamic Host Configuration Protocol (DHCP) allocates IP addresses dynamically, “leasing” addresses to devices so that the addresses can be reused when no longer needed. Hosts and end devices that require IP addresses obtained through DHCP must communicate with a DHCP server across the LAN.

DHCP snooping acts as a guardian of network security by keeping track of valid IP addresses assigned to downstream network devices by a trusted DHCP server (the server is connected to a trusted network port). By default, all trunk ports on the switch are trusted (**dhcp-trusted**) and all access ports are untrusted (**no-dhcp-trusted**) for DHCP snooping. You can modify these DHCP defaults on each of the switch's interfaces. See **dhcp-trusted**.

When DHCP snooping is enabled, the lease information from the switch (which is a DHCP client) is used to create the DHCP snooping database, which is a mapping of IP address to VLAN–MAC–address pairs. For each VLAN–MAC–address pair, the database stores the corresponding IP address.



Entries in the DHCP database are updated in the following events:

- When a DHCP client releases an IP address (sends a DHCPRELEASE message), the associated mapping entry is deleted from the database.
- When you move a network device from one VLAN to another, typically the device has to acquire a new IP address. So its entry in the database, including the VLAN ID, is updated.
- When the lease time (timeout value) assigned by the DHCP server expires, the associated entry is deleted from the database.



**TIP:** By default, the IP-MAC bindings are lost when the switch is rebooted and DHCP clients (the network devices, or hosts) must reacquire bindings. However, you can configure the bindings to persist by setting the `dhcp-snooping-file` statement to store the database file either locally or remotely.

You can configure the switch to snoop DHCP server responses only from particular VLANs. Doing this prevents spoofing of DHCP server messages.

You configure DHCP snooping per VLAN, not per interface (port). By default, DHCP snooping is disabled for all VLANs. You can enable DHCP snooping on all VLANs or on specific VLANs.



**NOTE:** If you configure DHCP for all VLANs and you enable a different port security feature on a specific VLAN, you must also explicitly enable DHCP on that VLAN. Otherwise, the default behavior of no DHCP snooping applies to that VLAN.



**TIP:** For private VLANs, enable DHCP snooping on the primary VLAN. If you enable DHCP snooping only on a community VLAN, DHCP messages coming from private VLAN trunk ports are not snooped.

## DHCP Snooping Process

The process of DHCP snooping entails the following steps:

1. The network device sends a DHCPDISCOVER packet to request an IP address.
2. The switch forwards the packet to the DHCP server.
3. The server sends a DHCPOFFER packet to offer an address. If the DHCPOFFER packet is from a trusted interface, switch forwards the packet to the DHCP client.
4. The network device sends a DHCPREQUEST packet to accept the IP address. The switch snoops this packet and adds an IP-MAC placeholder binding to the database.



The entry is considered a placeholder until a DHCPACK packet is received from the server. Until then, the IP address could still be assigned to some other host.

5. The server sends a DHCPACK packet to assign the IP address or a DHCPNAK packet to deny the address request.
6. The switch updates the DHCP database in accordance with the type of packet received:
  - Upon receipt of a DHCPACK packet, the switch updates lease information for the IP-MAC binding in its database.
  - Upon receipt of a DHCPNACK packet, the switch deletes the placeholder.



**NOTE:** DHCPDISCOVER and DHCPOFFER packets are not snooped. The DHCP database is updated only after the DHCPREQUEST packet has been sent.

---

For general information about the messages that the DHCP client and DHCP server exchange during the assignment of an IP address for the client, see the [Junos OS System Basics Configuration Guide](#).

### DHCP Server Access

---

Switch access to the DHCP server can be configured in three ways:

- [Switch, DHCP Clients, and DHCP Server Are All on the Same VLAN on page 4112](#)
- [Switch Acts as DHCP Server on page 4113](#)
- [Switch Acts as Relay Agent on page 4114](#)

#### **Switch, DHCP Clients, and DHCP Server Are All on the Same VLAN**

When the switch, DHCP clients, and DHCP server are all members of the same VLAN, the DHCP server can be connected to the switch in one of two ways:

- The server is directly connected to the same switch as the one connected to the DHCP clients (the hosts, or network devices, that are requesting IP addresses from the server). You must configure the port that connects the server to the switch as a trusted port. See [Figure 148 on page 4113](#).
- The server is directly connected to a switch that is itself directly connected through a trunk port to the switch that the DHCP clients are connected to. The trunk port is configured by default as a trusted port. The switch that the DHCP server is connected to is not configured for DHCP snooping. See [Figure 149 on page 4113](#)—in the figure, ge-0/0/11 is a trusted trunk port.



Figure 148: DHCP Server Connected Directly to Switch


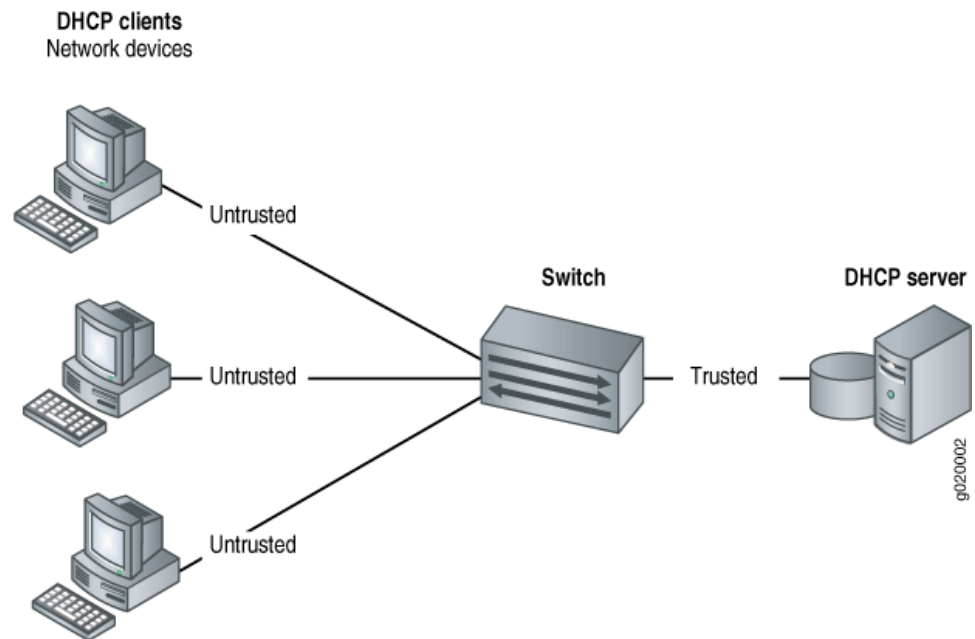


Figure 149: DHCP Server Connected Directly to Switch 2, with Switch 2 Connected to Switch 1 Through a Trusted Trunk Port


**Switch Acts as DHCP Server**

**NOTE:** This is not supported on the QFX Series.

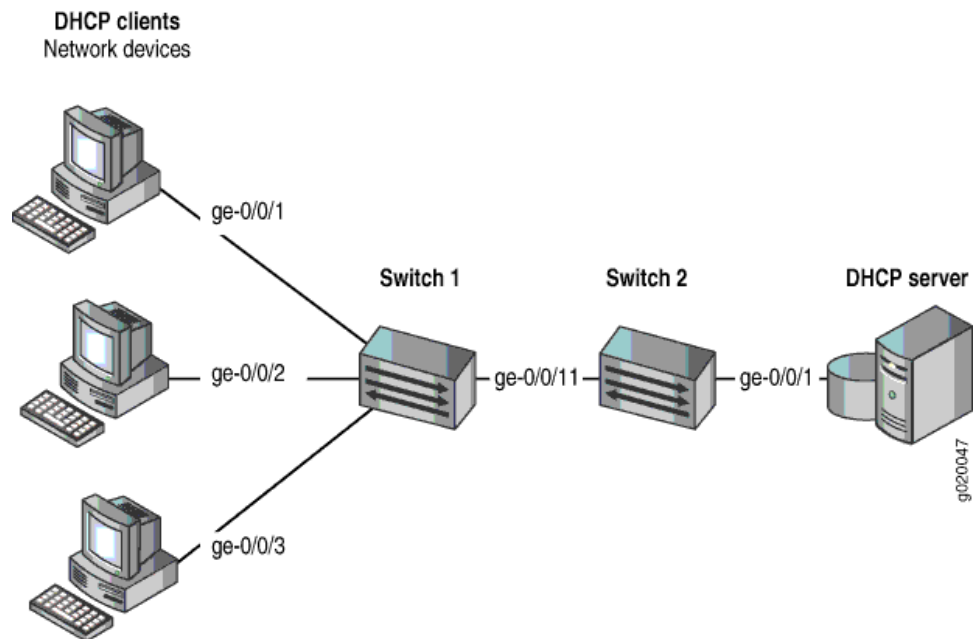

The switch itself is configured as a DHCP server; this is known as a *local configuration*. See [Figure 150 on page 4114](#).

**Figure 150: Switch Is the DHCP Server**

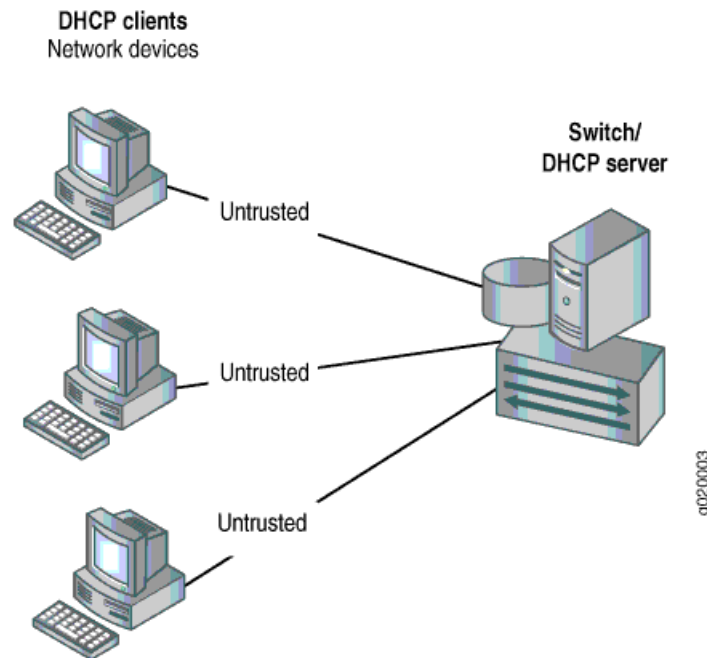

#### ***Switch Acts as Relay Agent***


The switch functions as a relay agent when the DHCP clients or the DHCP server is connected to the switch through a Layer 3 interface (on the switch, these interfaces are configured as routed VLAN interfaces, or RVIs). These trunk interfaces are trusted by default.

These two scenarios illustrate the switch acting as a relay agent:

- The DHCP server and clients are in different VLANs.
- The switch is connected to a router that is in turn connected to the DHCP server. See [Figure 151 on page 4115](#).



Figure 151: Switch Acting as Relay Agent Through Router to DHCP Server

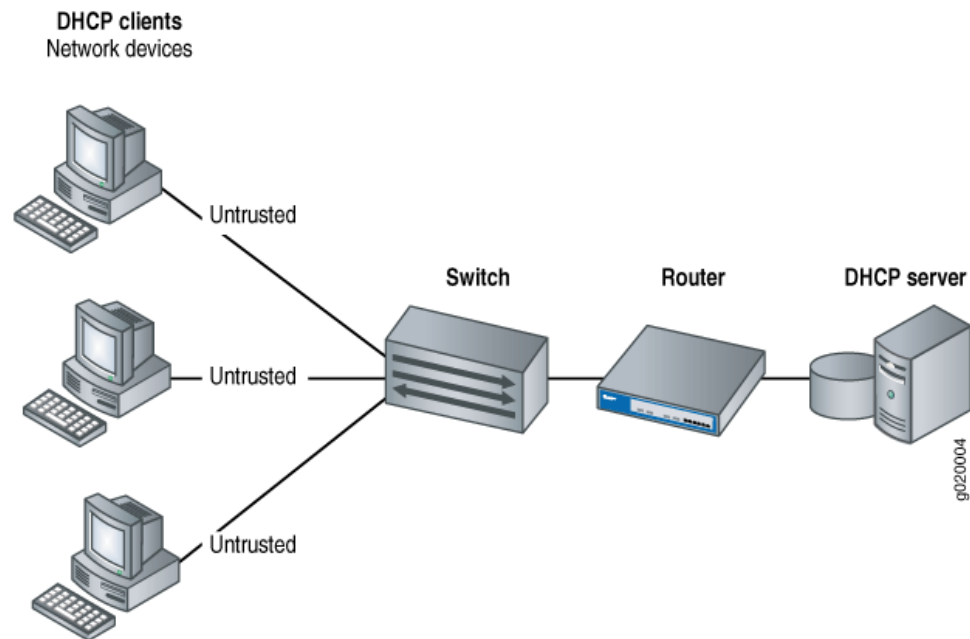

### DHCP Snooping Table

Juniper Networks Junos operating system (Junos OS) creates a DHCP snooping information table that displays the content of the DHCP snooping database. The table shows the current IP-MAC bindings, the lease time, type of binding, names of associated VLANs, and associated interfaces. To view the table, type the **show dhcp snooping binding** operational mode command:

```
user@switch> show dhcp snooping binding
```

DHCP Snooping Information:

| MAC address       | IP address | Lease (seconds) | Type    | VLAN     | Interface  |
|-------------------|------------|-----------------|---------|----------|------------|
| 00:05:85:3A:82:77 | 192.0.2.17 | 600             | dynamic | employee | ge-0/0/1.0 |
| 00:05:85:3A:82:79 | 192.0.2.18 | 653             | dynamic | employee | ge-0/0/1.0 |
| 00:05:85:3A:82:80 | 192.0.2.19 | 720             | dynamic | employee | ge-0/0/2.0 |

### Static IP Address Additions to the DHCP Snooping Database

You can add specific static IP addresses to the database and have the addresses dynamically assigned through DHCP snooping. To add static IP addresses, you supply the IP address, the MAC address of the device, the interface on which the device is connected, and the VLAN with which the interface is associated. No lease time is assigned to the entry. The statically configured entry never expires.

### Snooping DHCP Packets That Have Invalid IP Addresses

If you enable DHCP snooping on a VLAN and then devices on that VLAN send DHCP packets that request invalid IP addresses, these invalid IP addresses are stored in the DHCP snooping database until they are deleted when their default timeout is reached. To eliminate this unnecessary consumption of space in the DHCP snooping database,



the switch drops the DHCP packets that request invalid IP addresses, preventing the snooping of these packets. The invalid IP addresses are:

- 0.0.0.0
- 128.0.x.x
- 191.255.x.x
- 192.0.0.x
- 223.255.255.x
- 224.x.x.x
- 240.x.x.x to 255.255.255.255

---

### Prioritizing Snooped Packets

---



**NOTE:** Prioritizing DHCP snooped packets is not supported on the QFX Series.

---

You can use CoS forwarding classes and queues to prioritize DHCP snooped packets for a specified VLAN. This type of configuration places the DHCP snooped packets for that VLAN in the desired egress queue, so that the security procedure does not interfere with the transmittal of high-priority traffic.

#### Related Documentation

- [Port Security Overview on page 4108](#)
- [Understanding Trusted DHCP Servers for Port Security on page 4121](#)
- [Understanding DHCP Option 82 for Port Security on EX Series Switches](#)
- [Understanding DHCP Option 82 for Port Security on page 4122](#)
- [Understanding DHCP Services for Switches on page 39](#)
- [DHCP/BOOTP Relay for Switches Overview](#)
- [Example: Configuring Basic Port Security Features on page 4136](#)
- [Example: Using CoS Forwarding Classes to Prioritize Snooped Packets in Heavy Network Traffic](#)
- [Enabling DHCP Snooping \(CLI Procedure\) on page 4194](#) and [Enabling DHCP Snooping \(J-Web Procedure\)](#)
- [Troubleshooting Port Security](#)



## Understanding DAI for Port Security

Dynamic ARP inspection (DAI) protects switches against ARP spoofing.

DAI inspects ARP packets on the LAN and uses the information in the DHCP snooping database on the switch to validate ARP packets and to protect against ARP cache poisoning. ARP requests and replies are compared against entries in the DHCP snooping database, and filtering decisions are made based on the results of those comparisons. When an attacker tries to use a forged ARP packet to spoof an address, the switch compares the address to entries in the database. If the MAC address or IP address in an ARP packet does not match a valid entry in the DHCP snooping database, the packet is dropped.

ARP packets are sent to the Routing Engine and are rate-limited to protect the switch from CPU overload.

- [Address Resolution Protocol on page 4117](#)
- [ARP Spoofing on page 4117](#)
- [Dynamic ARP Inspection \(DAI\) on page 4118](#)
- [Prioritizing Inspected Packets on page 4118](#)

### Address Resolution Protocol

Sending IP packets on a multiaccess network requires mapping an IP address to an Ethernet media access control (MAC) address.

Ethernet LANs use Address Resolution Protocol (ARP) to map MAC addresses to IP addresses.

The switch maintains this mapping in a cache that it consults when forwarding packets to network devices. If the ARP cache does not contain an entry for the destination device, the host (the DHCP client) broadcasts an ARP request for that device's address and stores the response in the cache.

### ARP Spoofing

ARP spoofing (also known as ARP poisoning or ARP cache poisoning) is one way to initiate man-in-the-middle attacks. The attacker sends an ARP packet that spoofs the MAC address of another device on the LAN. Instead of the switch sending traffic to the proper network device, it sends it to the device with the spoofed address that is impersonating the proper device. If the impersonating device is the attacker's machine, the attacker receives all the traffic from the switch that should have gone to another device. The result is that traffic from the switch is misdirected and cannot reach its proper destination.

One type of ARP spoofing is gratuitous ARP, which is when a network device sends an ARP request to resolve its own IP address. In normal LAN operation, gratuitous ARP messages indicate that two devices have the same MAC address. They are also broadcast when a network interface card (NIC) in a device is changed and the device is rebooted, so that other devices on the LAN update their ARP caches. In malicious situations, an attacker can poison the ARP cache of a network device by sending an ARP response to



the device that directs all packets destined for a certain IP address to go to a different MAC address instead.

To prevent MAC spoofing through gratuitous ARP and through other types of spoofing, the switches examine ARP responses through DAI.

### Dynamic ARP Inspection (DAI)

---

DAI examines ARP requests and responses on the LAN and validates ARP packets. The switch intercepts ARP packets from an access port and validates them against the DHCP snooping database. If no IP-MAC entry in the database corresponds to the information in the ARP packet, DAI drops the ARP packet and the local ARP cache is not updated with the information in that packet. DAI also drops ARP packets when the IP address in the packet is invalid.

Junos OS for EX Series switches and the QFX Series uses DAI for ARP packets received on access ports because these ports are untrusted by default. Trunk ports are trusted by default, so ARP packets bypass DAI on them.

You configure DAI for each VLAN, not for each interface (port). By default, DAI is disabled for all VLANs. You can set an interface to be trusted for ARP packets by setting **dhcp-trusted** on that port.

For packets directed to the switch to which a network device is connected, ARP queries are broadcast on the VLAN. The ARP responses to those queries are subjected to the DAI check.

For DAI, all ARP packets are trapped to the Routing Engine. To prevent CPU overloading, ARP packets destined for the Routing Engine are rate-limited.

If the DHCP server goes down and the lease time for an IP-MAC entry for a previously valid ARP packet runs out, that packet is blocked.

### Prioritizing Inspected Packets

---



**NOTE:** This is not supported on the QFX Series.

---

You can use CoS forwarding classes and queues to prioritize DAI packets for a specified VLAN. This type of configuration places inspected packets for that VLAN in the desired egress queue, ensuring that the security procedure does not interfere with the transmittal of high-priority traffic.

#### Related Documentation

- [Port Security Overview on page 4108](#)
- [Understanding DHCP Snooping for Port Security on page 4110](#)
- [Example: Configuring Basic Port Security Features on page 4136](#)
- [Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 4155](#)
- [Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 4162](#)



- Example: Using CoS Forwarding Classes to Prioritize Snooped Packets in Heavy Network Traffic
- [Enabling Dynamic ARP Inspection \(CLI Procedure\) on page 4197](#)
- [Enabling Dynamic ARP Inspection \(J-Web Procedure\)](#)

## Understanding MAC Limiting and MAC Move Limiting for Port Security

MAC limiting protects against flooding of the Ethernet switching table (also known as the MAC forwarding table or Layer 2 forwarding table). You enable this feature on Layer 2 interfaces (ports). MAC move limiting detects MAC movement and MAC spoofing on access interfaces. You enable this feature on VLANs.

- [MAC Limiting on page 4119](#)
- [MAC Move Limiting on page 4120](#)
- [Actions for MAC Limiting on page 4120](#)
- [MAC Addresses That Exceed the MAC Limit or MAC Move Limit on page 4120](#)

### MAC Limiting

MAC limiting sets a limit on the number of MAC addresses that can be learned on a single Layer 2 access interface or on all the Layer 2 access interfaces on the switch. Junos OS provides two MAC limiting methods:

- Maximum number of MAC addresses—You configure the maximum number of dynamic MAC addresses allowed per interface. When the limit is exceeded, incoming packets with new MAC addresses can be ignored, dropped, or logged. You can also specify that the interface be shut down or temporarily disabled.
- Allowed MAC addresses—You configure specific “allowed” MAC addresses for the access interface. Any MAC address that is not in the list of configured addresses is not learned, and the switch logs an appropriate message. Allowed MAC binds MAC addresses to a VLAN so that the address does not get registered outside the VLAN. If an allowed MAC setting conflicts with a dynamic MAC setting, the allowed MAC setting takes precedence.



**NOTE:** If you do not want the system to log messages about invalid MAC addresses received by an interface that has been configured for allowed MAC addresses, disable the logging by configuring the [no-allowed-mac-log](#) statement.

You configure MAC limiting per interface, not per VLAN. You can specify the maximum number of dynamic MAC addresses that can be learned on a single Layer 2 access interface (including tagged-access interfaces) or on all Layer 2 access interfaces.



## MAC Move Limiting

---

MAC move limiting causes the switch to track the number of times a MAC address can move to a new interface (port). It can help to prevent MAC spoofing, and it can also detect and prevent loops.

If a MAC address moves more than the configured number of times within 1 second, the switch performs the configured action. You can configure MAC move limiting to apply to all VLANs or to a specific VLAN.

## Actions for MAC Limiting

---

You can choose to have one of the following actions performed when the limit of MAC addresses or the limit of MAC moves is exceeded:

- **drop**—Drop the packet and generate a system log entry. This is the default.
- **log**—Do not drop the packet but generate a system log entry.
- **none**—Take no action.
- **shutdown**—Disable the interface and generate an alarm. If you configure the switch with the **port-error-disable** statement, the disabled interface recovers automatically upon expiration of the specified timeout. If this is not configured, you can bring up the disabled interfaces by running the **clear ethernet-switching port-error** command.

See descriptions of results of these various action settings in “[Verifying That MAC Limiting Is Working Correctly](#)” on page 4280.

If you set a MAC limit to apply to all interfaces on the switch, you can override that setting for a particular interface by specifying action **none**. See “[Configuring the none Action to Override a MAC Limit Applied to All Interfaces \(CLI Procedure\)](#)” on page 4192

## MAC Addresses That Exceed the MAC Limit or MAC Move Limit

---

If you have configured the **port-error-disable** statement, you can view which interfaces are temporarily disabled because the MAC limit or MAC move limit was exceeded. Use the **show ethernet-switching interfaces** command.

The log messages that indicate the MAC limit or MAC move limit has been exceeded include the offending MAC addresses.

### Related Documentation

- [Port Security Overview](#) on page 4108
- [Configuring MAC Limiting](#) on page 4188
- [Configuring MAC Move Limiting \(CLI Procedure\)](#) on page 4190
- [Verifying That MAC Limiting Is Working Correctly](#) on page 4280
- [Verifying That MAC Move Limiting Is Working Correctly](#) on page 4283
- [Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks](#) on page 4145
- [Example: Configuring Basic Port Security Features](#) on page 4136



- [no-allowed-mac-log on page 4251](#)

## Understanding Trusted and Untrusted Ports

By default, all access ports are untrusted and all trunk ports are trusted in regard to DHCP. Trusted ports allow DHCP servers to provide IP addresses and other information to requesting devices. Untrusted ports drop traffic from DHCP servers to prevent unauthorized servers from providing any configuration information to clients.

If you attach a DHCP server to an access port, you must configure the port as trusted. Before you do so, ensure that the server is physically secure—that is, that access to the server is monitored and controlled.

### Related Documentation

- [Understanding DHCP Snooping for Port Security on page 4110](#)
- [Example: Configuring Basic Port Security Features on page 4136](#)
- [Enabling a Trusted Port for DHCP on page 4200](#)

## Understanding Trusted DHCP Servers for Port Security

Any interface on the switch that connects to a DHCP server can be configured as a trusted port. Configuring a DHCP server on a trusted port protects against rogue DHCP servers sending leases.

Ensure that the DHCP server interface is physically secure—that is, that access to the server is monitored and controlled at the site—before you configure the port as trusted.

### Related Documentation

- [Understanding DHCP Snooping for Port Security on page 4110](#)
- [Example: Configuring Basic Port Security Features on page 4136](#)
- [Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks on page 4152](#)
- [Enabling a Trusted DHCP Server \(CLI Procedure\) on page 4199](#)
- [Enabling a Trusted DHCP Server \(J-Web Procedure\)](#)



## Understanding DHCP Option 82 for Port Security

You can use DHCP option 82, also known as the DHCP relay agent information option, to help protect the switch against attacks such as spoofing (forging) of IP addresses and MAC addresses, and DHCP IP address starvation. Hosts on untrusted access interfaces on Ethernet LAN switches send requests for IP addresses in order to access the Internet. The switch forwards or relays these requests to DHCP servers, and the servers send offers for IP address leases in response. Attackers can use these messages to perpetrate address spoofing and starvation.

Option 82 provides information about the network location of a DHCP client, and the DHCP server uses this information to implement IP addresses or other parameters for the client. The Juniper Networks Junos operating system (Junos OS) implementation of DHCP option 82 supports RFC 3046, *DHCP Relay Agent Information Option*, at <http://tools.ietf.org/html/rfc3046>.

This topic covers:

- [DHCP Option 82 Processing on page 4122](#)
- [Suboption Components of Option 82 on page 4123](#)
- [Configurations That Support Option 82 on page 4123](#)

---

### DHCP Option 82 Processing

If DHCP option 82 is enabled on the switch, then when a DHCP client that is connected to the switch on an untrusted interface sends a DHCP request, the switch inserts information about the client's network location into the packet header of that request. The switch then sends the request to the DHCP server. The DHCP server reads the option 82 information in the packet header and uses it to implement the IP address or another parameter for the client. See “[Suboption Components of Option 82](#)” on page 4123 for details about option 82 information.

You can enable DHCP option 82 on a single VLAN or on all VLANs on the switch. You can also configure it on Layer 3 interfaces (in routed VLAN interfaces, or RVIs) when the switch is functioning as a relay agent.

When option 82 is enabled on the switch, then this sequence of events occurs when a DHCP client sends a DHCP request:

1. The switch receives the request and inserts the option 82 information in the packet header.
2. The switch forwards or relays the request to the DHCP server.
3. The server uses the DHCP option 82 information to formulate its reply and sends a response back to the switch. It does not alter the option 82 information.
4. The switch strips the option 82 information from the response packet.
5. The switch forwards the response packet to the client.





**NOTE:** To use the DHCP option 82 feature, you must ensure that the DHCP server is configured to accept option 82. If it is not configured to accept option 82, then when it receives requests containing option 82 information, it does not use the information in setting parameters and it does not echo the information in its response message.

### Suboption Components of Option 82

When configuring DHCP option 82, you can use the following suboptions:

- **circuit ID**—Identifies the circuit (interface and/or VLAN) on the switch on which the request was received. The circuit ID contains the interface name and/or VLAN name, with the two elements separated by a colon—for example, **xe-0/0/10:vlan1**. If the request packet is received on a Layer 3 interface, the circuit ID is just the interface name—for example, **xe-0/0/10**.

Use the **prefix** option to add an optional prefix to the circuit ID. If you enable the **prefix** option, the hostname for the switch is used as the prefix; for example, **switch1:xe-0/0/10:vlan1**.

You can also specify that the interface description be used rather than the interface name and that the VLAN ID be used rather than the VLAN name.

- **remote ID**—Identifies the host. By default, the remote ID is the MAC address of the switch. You can specify that the remote ID be the hostname of the switch, the interface description, or a character string of your choice. You can also add an optional prefix to the remote ID.
- **vendor ID**—Identifies the vendor of the host. If you specify the **vendor-id** option but do not enter a value, the default value **Juniper** is used. To specify a value, you type a character string.


### Configurations That Support Option 82

You can use option 82 with the following configurations:

- The DHCP client and the DHCP server are on the same VLAN. In this case the switch forwards the requests from the clients on untrusted access interfaces to the server on a trusted interface. For this configuration, you set DHCP option 82 at the **[edit ethernet-switching-options secure-access-port vlan]** hierarchy level.
- The DHCP client or the DHCP server is connected to the switch through a Layer 3 interface and the switch is configured to relay DHCP requests. [Figure 152 on page 4124](#) illustrates a scenario for the switch-as-relay-agent; in this instance, the switch relays requests through a router to the server.



Figure 152: Switch Relays DHCP Requests to Server

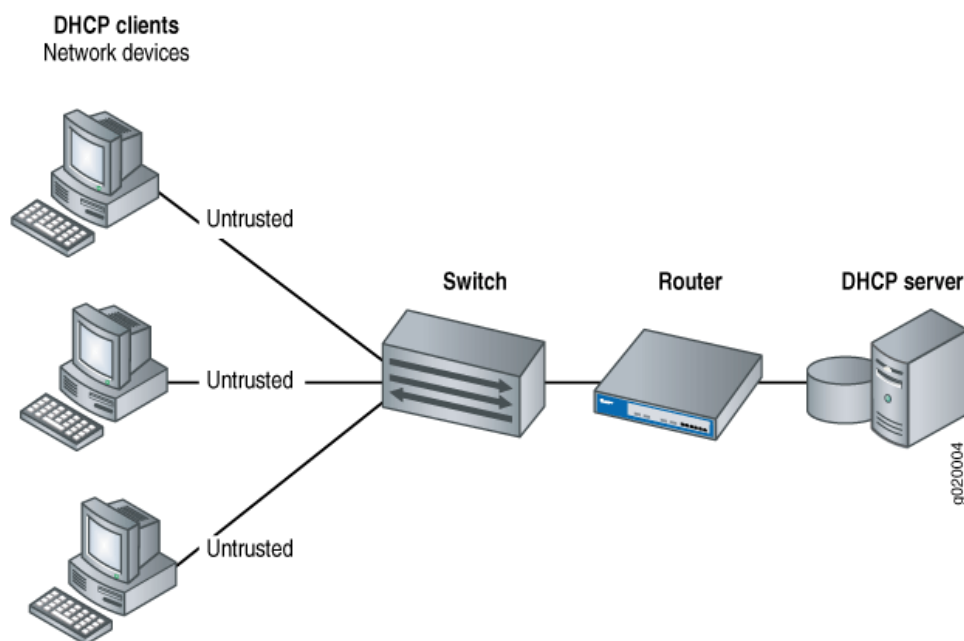

For the configuration shown in [Figure 152 on page 4124](#), you set DHCP option 82 at the `[edit forwarding-options helpers bootp]` hierarchy level.

#### Related Documentation

- [Overview of Access Port Protection on page 4105](#)
- [DHCP and BOOTP Relay Overview on page 4317](#)
- [dhcp-option82 on page 4236](#)
- [Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 4170](#)
- [Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 4174](#)
- [Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 4201](#)
- [Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 4204](#)

## Understanding Static ARP Entries

You can create explicit mappings between IP addresses and MAC addresses, which are called static ARP table entries. Unlike dynamically learned ARP entries, static entries do not age out. You might want to create static ARP entries in a troubleshooting situation or if your device is unable to learn a MAC address dynamically for any reason.

#### Related Documentation

- [Configuring Static ARP Entries on page 1550](#)
- [arp on page 1580](#)



---

## Device Security

---

- [Understanding Storm Control on page 4125](#)
- [Understanding Unknown Unicast Forwarding on page 4126](#)

### Understanding Storm Control

A traffic storm occurs when broadcast packets prompt receiving devices to broadcast packets in response. This prompts further responses, creating a snowball effect. The switch is flooded with packets, which creates unnecessary traffic that leads to poor performance or even a complete loss of service by some clients. Storm control causes a device to monitor traffic levels and take a specified action when a specified traffic level—called the *storm control level*—is exceeded, thus preventing packets from proliferating and degrading service. You can configure devices to drop broadcast and unknown unicast packets, shut down interfaces, or temporarily disable interfaces when the storm control level is exceeded.

By default, storm control is enabled on all interfaces at a level of 80 percent of the available bandwidth. You can change the storm control level by configuring it as a specific bandwidth value. (The **level** configuration statement, which allows you to configure the storm control level as a percentage of the combined broadcast and unknown unicast streams, is deprecated and might be removed from future releases. We recommend that you phase out its use and replace it with the **bandwidth** statement.)



**NOTE:** When you configure storm control bandwidth, the value you configure is rounded off internally to the closest multiple of 64 Kbps, and the rounded-off value represents the bandwidth that is actually enforced. For example, if you configure a bandwidth limit of 150 Kbps, storm control enforces a bandwidth limit of 128 Kbps.



**NOTE:** Storm control must be disabled on all Ethernet interfaces that belong to the FCoE VLAN to prevent FCoE traffic from being dropped. Configuring storm control on an Ethernet interface and including that interface in an FCoE-FC gateway may have undesirable effects, including FCoE packet loss. After disabling storm control on all interfaces, enable storm control on any interfaces that are not part of an FCoE-FC gateway on which you want to use storm control.



**CAUTION:** The Junos OS allows you to configure a storm control value that exceeds the bandwidth of the interface. If you configure an interface this way, storm control does not drop broadcast or unknown unicast packets even if they consume all the available bandwidth.



Broadcast, multicast, and unicast packets are sent as part of normal operations, so to recognize a storm, you must be able to identify when traffic has reached an abnormal level. Suspect a storm when operations begin timing out and network response times slow down. Users might be unable to access expected services. Monitor the percentage of broadcast and unknown unicast traffic in the network when it is operating normally. This data can then be used as a benchmark to determine when traffic levels are too high. You can then configure storm control to set the level at which you want to drop broadcast and unknown unicast traffic.

**Related Documentation**

- [Example: Configuring Storm Control on page 4143](#)
- [Configuring Autorecovery for MAC Limited or Storm Control Interfaces \(CLI Procedure\) on page 4192](#)
- [Disabling Storm Control on FCoE Interfaces on an FCoE-FC Gateway on page 4586](#)
- [action-shutdown on page 4266](#)
- [interface \(Storm Control\) on page 1604](#)
- [port-error-disable on page 4253](#)
- [storm-control on page 1641](#)

## Understanding Unknown Unicast Forwarding

Unknown unicast packets have unknown destination MAC addresses. By default, these packets are flooded out all the ports in the VLAN, which can trigger a traffic storm and cause security issues and performance degradation. To prevent storms, you can configure a VLAN to forward unknown unicast traffic to a trunk port, which prevents the packets from being flooded.

**Related Documentation**

- [Understanding Storm Control on page 4125](#)
- [Example: Configuring Storm Control on page 4143](#)
- [Configuring Unknown Unicast Forwarding on page 4194](#)



## CHAPTER 47

# Configuration

- [Firewall and Policer Configuration Examples on page 4127](#)
- [Port Security Configuration Examples on page 4136](#)
- [Firewall and Policer Configuration Tasks on page 4176](#)
- [Port Security Configuration Tasks on page 4185](#)
- [Configuration Statements for Firewall Filters on page 4207](#)
- [Configuration Statements for Policers on page 4214](#)
- [Configuration Statements for Port Security on page 4232](#)
- [Configuration Statements for Device Security on page 4266](#)

### Firewall and Policer Configuration Examples

---

- [Example: Using Filter-Based Forwarding to Route Application Traffic to a Security Device on page 4127](#)
- [Example: Using Two-Color Policers and Prefix Lists on page 4131](#)
- [Example: Using Policers to Manage Oversubscription on page 4134](#)

### Example: Using Filter-Based Forwarding to Route Application Traffic to a Security Device

You can configure filter-based forwarding by using a firewall filter to forward matched traffic to a specific virtual routing instance.

This example describes how to set up filter-based forwarding:

- [Requirements on page 4127](#)
- [Overview and Topology on page 4128](#)
- [Configuration on page 4128](#)
- [Verification on page 4130](#)

#### Requirements

---

This example requires Junos OS Release 12.2X50-D20 or later.



## Overview and Topology

In this example, traffic from one application server that is destined for a different application server is matched by a firewall filter based on the IP address of the source application server. Any matching packets are routed to a virtual routing instance that sends the traffic to a security device. In this case, the security device must be able to forward the traffic to the destination application server. For this example, assume that the address of the destination application server is 192.168.0.1.

## Configuration

To configure filter-based forwarding:

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste them into the CLI at the **[edit]** hierarchy level.

```
[edit]
set interfaces xe-0/0/0 unit 0 family inet address 10.1.0.1/24
set interfaces xe-0/0/3 unit 0 family inet address 10.1.3.1/24
set firewall family inet filter f1 term t1 from source-address 10.1.0.50/32
set firewall family inet filter f1 term t1 from protocol tcp
set interfaces xe-0/0/0 unit 0 family inet filter input f1
set routing-instances vrf01 instance-type virtual-router
set routing-instances vrf01 interface xe-0/0/3.0
set routing-instances vrf01 routing-options static route 192.168.0.1/24 next-hop 10.1.3.254
set firewall family inet filter f1 term t1 then routing-instance vrf01
```

### Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide. To configure filter-based forwarding:

1. Configure an interface to connect to the application server:  

```
[edit interfaces]
user@switch# set xe-0/0/0 unit 0 family inet address 10.1.0.1/24
```
2. Configure an interface to connect to the security device:  

```
[edit interfaces]
user@switch# set xe-0/0/3 unit 0 family inet address 10.1.3.1/24
```
3. Create a firewall filter that matches packets based on the address of the application server that the traffic will be sent from. Also configure the filter so that it matches only TCP packets:  

```
[edit firewall]
user@switch# set family inet filter f1 term t1 from source-address 10.1.0.50/32
user@switch# set firewall family inet filter f1 term t1 from protocol tcp
```
4. Apply the filter to the interface that connects to the source application server and configure it to match incoming packets:  

```
[edit interfaces]
user@switch# set xe-0/0/0 unit 0 family inet filter input f1
```
5. Create a virtual router:  

```
[edit]
user@switch# set routing-instances vrf01 instance-type virtual-router
```
6. Associate the virtual router with the interface that connects to the security device:



- ```
[edit routing-instances]
user@switch# set vrf01 interface xe-0/0/3.0
```
7. Configure the routing information for the virtual routing instance:
- ```
[edit routing-instances]
user@switch# set vrf01 routing-options static route 192.168.0.1/24 next-hop 10.1.3.254
```
8. Set the filter to forward packets to the virtual router:
- ```
[edit firewall]
user@switch# set family inet filter f1 term t1 then routing-instance vrf01
```

### Results

Check the results of the configuration:

```
user@switch> show configuration
interfaces {
  xe-0/0/0 {
    unit 0 {
      family inet {
        filter {
          input f1;
        }
        address 10.1.0.1/24;
      }
    }
  }
  xe-0/0/3 {
    unit 0 {
      family inet {
        address 10.1.3.1/24;
      }
    }
  }
}
firewall {
  family inet {
    filter f1 {
      term t1 {
        from {
          source-address {
            10.1.0.50/32;
          }
          protocol tcp;
        }
        then {
          routing-instance vrf01;
        }
      }
    }
  }
}
routing-instances {
  vrf01 {
    instance-type virtual-router;
    interface xe-0/0/1.0;
    routing-options {
```



```

static {
    route 12.34.56.0/24 next-hop 10.1.3.254;
}
}
}
}

```

## Verification

To confirm that the configuration is working properly, perform these tasks:

- [Verifying That Filter-Based Forwarding Was Configured on page 4130](#)

### Verifying That Filter-Based Forwarding Was Configured

**Purpose** Verify that filter-based forwarding was properly enabled on the switch.

**Action** 1. Use the `show interfaces filters` command:

```

user@switch> show interfaces filters xe-0/0/0.0
Interface      Admin Link Proto Input Filter      Output Filter
xe-0/0/0.0      up    down inet f1

```

2. Use the `show route forwarding-table` command:

```

user@switch> show route forwarding-table

Routing table: default.inet
Internet:
Destination      Type RtRef Next hop      Type Index NhRef Netif
default          user  1 0:12:f2:21:cf:0 ucst  331  4 me0.0
default          perm  0                rjct  36   3
0.0.0.0/32       perm  0                dscd  34   1
10.1.0.0/24      ifdn  0                rslv  613  1 xe-0/0/0.0
10.1.0.0/32      iddn  0 10.1.0.0        recv  611  1 xe-0/0/0.0
10.1.0.1/32      user  0                rjct  36   3
10.1.0.1/32      intf  0 10.1.0.1        locl  612  2
10.1.0.1/32      iddn  0 10.1.0.1        locl  612  2
10.1.0.255/32    iddn  0 10.1.0.255      bcst  610  1 xe-0/0/0.0
10.1.1.0/26      ifdn  0                rslv  583  1 vlan.0
10.1.1.0/32      iddn  0 10.1.1.0        recv  581  1 vlan.0
10.1.1.1/32      user  0                rjct  36   3
10.1.1.1/32      intf  0 10.1.1.1        locl  582  2
10.1.1.1/32      iddn  0 10.1.1.1        locl  582  2
10.1.1.63/32     iddn  0 10.1.1.63       bcst  580  1 vlan.0
255.255.255.255/32 perm  0                bcst  32   1

```

```

Routing table: vrf01.inet
Internet:
Destination      Type RtRef Next hop      Type Index NhRef Netif
default          perm  0                rjct  559  2
0.0.0.0/32       perm  0                dscd  545  1
10.1.3.0/24      ifdn  0                rslv  617  1 xe-0/0/3.0
10.1.3.0/32      iddn  0 10.1.3.0        recv  615  1 xe-0/0/3.0
10.1.3.1/32      user  0                rjct  559  2
192.168.0.1/24   user  0 10.1.3.254      ucst  616  2 xe-0/0/3.0
192.168.0.1/24   user  0 10.1.3.254      ucst  616  2 xe-0/0/3.0
10.1.3.255/32    iddn  0 10.1.3.255      bcst  614  1 xe-0/0/3.0
224.0.0.0/4      perm  0                mdsc  546  1
224.0.0.1/32     perm  0 224.0.0.1       mcst  529  1

```



```

255.255.255.255/32 perm      0                bcst    543      1

Routing table: default.iso
ISO:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm  0                rjct    60       1

Routing table: vrf01.iso
ISO:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm  0                rjct    600      1

```

**Meaning** The output indicates that the filter was created on the interface and that the virtual routing instance is forwarding matching traffic to the correct IP address.

- Related Documentation**
- [Configuring Firewall Filters on page 4177](#)
  - [Understanding Filter-Based Forwarding on page 4073](#)
  - [Understanding Virtual Router Routing Instances on page 2316](#)

## Example: Using Two-Color Policers and Prefix Lists

If you provide specific amounts of bandwidth to internal or external customers, you can use policing to make sure that customers do not consume more bandwidth than they should receive. For example, you might connect many customers to one 10-Gbps interface and want to ensure that none of them congest the interface by using more bandwidth than they have been allotted.

You could accomplish this by creating a two-color policer similar to the following for each customer:

```

firewall {
  policer Limit-Customer-1 {
    if-exceeding {
      bandwidth-limit 100m;
      burst-size-limit 150m;
    }
    then discard;
  }
}

```

Creating a policer for each customer is clearly not a scalable solution, however. As an alternative, you can create prefix lists that group classes of customers and then create policers for each prefix list. For example, you could create prefix lists such as **Class-A-Customer-Prefixes**, **Class-B-Customer-Prefixes**, and **Class-C-Customer-Prefixes** (at the **[edit policy-options]** hierarchy level) and create the following corresponding policers:

```

firewall {
  policer Class-A {
    if-exceeding {
      bandwidth-limit 100m;
      burst-size-limit 150m;
    }
  }
}

```



```
    }
    then discard;
  }
  policer Class-B {
    if-exceeding {
      bandwidth-limit 75m;
      burst-size-limit 100m;
    }
    then discard;
  }
  policer Class-C {
    if-exceeding {
      bandwidth-limit 50m;
      burst-size-limit 75m;
    }
    then discard;
  }
}
```

You must create filter terms that specify the prefix lists in their **from** statements and the corresponding policers in their **then** statements similar to the following:

```
firewall
family inet {
  filter Class-A-Customers {
    term term-1 {
      from {
        destination-prefix-list {
          Class-A-Customer-Prefixes;
        }
      }
      then policer Class-A;
    }
  }
  filter Class-B-Customers {
    term term-1 {
      from {
        destination-prefix-list {
          Class-B-Customer-Prefixes;
        }
      }
      then policer Class-B;
    }
  }
  filter Class-C-Customers {
    term term-1 {
      from {
        destination-prefix-list {
          Class-C-Customer-Prefixes;
        }
      }
      then policer Class-C;
    }
  }
}
```



Here are the steps to create this firewall configuration:

1. Create the first policer:

```
[edit firewall]
user@switch# set policer Class-A if-exceeding bandwidth-limit 100m burst-size-limit 150m
user@switch# set policer Class-A then discard
```

2. Create the second policer:

```
[edit firewall]
user@switch# set policer Class-B if-exceeding bandwidth-limit 75m burst-size-limit 100m
user@switch# set policer Class-B then discard
```

3. Create the third policer:

```
[edit firewall]
user@switch# set policer Class-C if-exceeding bandwidth-limit 50m burst-size-limit 75m
user@switch# set policer Class-C then discard
```

4. Create a filter for class A customers:

```
[edit firewall]
user@switch# edit family inet filter Class-A-Customers
```

5. Configure the filter to send packets matching the Class-A-Customer-Prefixes prefix list to the Class-A policer:

```
[edit firewall family inet filter Class-A-Customers]
user@switch# set term term-1 from source-prefix-list Class-A-Customers
user@switch# set term term-1 then policer Class-A
```

6. Create a filter for class B customers:

```
[edit firewall]
user@switch# edit family inet filter Class-B-Customers
```

7. Configure the filter to send packets matching the Class-B-Customer-Prefixes prefix list to the Class-B policer:

```
[edit firewall family inet filter Class-B-Customers]
user@switch# set term term-1 from source-prefix-list Class-B-Customers
user@switch# set term term-1 then policer Class-B
```

8. Create a filter for class C customers:

```
[edit firewall]
user@switch# edit family inet filter Class-C-Customers
```

9. Configure the filter to send packets matching the Class-C-Customer-Prefixes prefix list to the Class-C policer:

```
[edit firewall family inet filter Class-C-Customers]
user@switch# set term term-1 from source-prefix-list Class-C-Customers
user@switch# set term term-1 then policer Class-C
```

10. Apply the filters you created to the appropriate interfaces in the output direction.



**NOTE:** Note that the implicit deny statement in this filter will block traffic from any source that does not match one of the prefix lists. If you want the filter to allow this traffic, you must include an explicit term for this purpose.

#### Related Documentation

- [Overview of Policers on page 4096](#)
- [Applying Firewall Filters to Interfaces on page 4095](#)



- prefix-list

### Example: Using Policers to Manage Oversubscription

You might want to use a policer when an interface is oversubscribed and you want to control what will happen if congestion occurs. For example, you might have servers connected to a switch as listed in [Table 287 on page 4134](#).

**Table 287: Servers Connected to Switch**

Server Type	Connection	IP Address
Network application server	1-gigabit interface	10.0.0.1
Authentication server	1-gigabit interface	10.0.0.2
Database server	10-gigabit interface	10.0.0.3

In this example, users access services provided by the network application server, which requests information from the database server as appropriate. When it receives a request from a user, the network application server first contacts the authentication server to verify the user's credentials. When a user is authenticated and the network application server provides the requested service, all the packets sent from the database server to the application server must transit the 1-Gigabit Ethernet interface connected to the application server twice—once on ingress to the application server and again on egress to the user.

The sequence of events for a user session is as follows:

1. A user connects to the application server and requests a service.
2. The application server requests the user's credentials and relays them to the authentication server.
3. If the authentication server verifies the credentials, the application server initiates the requested service.
4. The application server requests the files necessary to meet the user's request from the database server.
5. The database server sends the requested files to the application server.
6. The application server includes the requested files in its response to the user.

Traffic from the database server to the application server might congest the 1-gigabit interface to which that the application server is connected. This congestion might prevent the server from responding to requests from users and creating new sessions for them. You can use policing to make sure that this does not occur.



To create this firewall configuration, perform the following steps on the database server:

1. Create a policer to drop traffic from the database server to the application server if it exceeds certain limits:

```
[edit firewall]
user@switch# set policer Database-Egress-Policer if-exceeding bandwidth-limit 400
burst-size-limit 500m
user@switch# set policer Database-Egress-Policer then discard
```

2. Create a filter to examine traffic from the database server to the application server:

```
[edit firewall]
user@switch# edit family inet filter Database-Egress-Filter
```

3. Configure the filter to apply the policer to traffic egressing the database server and destined for the application server:

```
[edit firewall family inet filter Database-Egress-Filter]
user@switch# set term term-1 from destination-address 10.0.0.1
user@switch# set term term-1 then policer Database-Egress-Policer
```

4. If required, configure a term to allow traffic from the database server to other destinations (otherwise the traffic will be dropped by the implicit deny statement):

```
[edit firewall family inet filter Database-Egress-Filter]
user@switch# set term term-2 then accept
```

Note that omitting a **from** statement causes the term to match all packets, which is the desired behavior.

5. Install the egress filter as an output filter on the database server interface that is connected the application server:

```
[edit interfaces]
user@switch# set xe-0/0/3 unit 0 family inet filter output Database-Egress-Filter
```

Here is how the final configuration would appear:

```
firewall {
  policer Database-Egress-Policer {
    if-exceeding {
      bandwidth-limit 400;
      burst-size-limit 500m;
    }
    then discard;
  }
  family inet {
    filter Database-Egress-Filter {
      term term-1 {
        from {
          destination-address {
            10.0.0.1/24;
          }
        }
        then policer Database-Egress-Policer;
      }
      term term-2 { # If required, include this term so that traffic from the database server
                    # to other destinations is allowed.
        then accept;
      }
    }
  }
}
```



```
}  
]
```

**Related  
Documentation**

- [Overview of Policers on page 4096](#)

---

## Port Security Configuration Examples

---

- [Example: Configuring Basic Port Security Features on page 4136](#)
- [Example: Configuring Storm Control on page 4143](#)
- [Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks on page 4145](#)
- [Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks on page 4148](#)
- [Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks on page 4152](#)
- [Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 4155](#)
- [Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 4162](#)
- [Example: Configuring Allowed MAC Addresses to Protect the Switch from DHCP Snooping Database Alteration Attacks on page 4167](#)
- [Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 4170](#)
- [Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 4174](#)

### Example: Configuring Basic Port Security Features

You can configure DHCP snooping, dynamic ARP inspection (DAI), MAC limiting, persistent MAC learning, and MAC move limiting on the access ports of switches to protect the switches and the Ethernet LAN against address spoofing and Layer 2 denial-of-service (DoS) attacks. You can also configure a trusted DHCP server and specific (allowed) MAC addresses for the switch interfaces.

This example describes how to configure basic port security features on a switch:

- [Requirements on page 4136](#)
- [Overview and Topology on page 4137](#)
- [Configuration on page 4139](#)
- [Verification on page 4140](#)

---

#### Requirements

---

This example uses the following hardware and software components:

- One EX Series switch or one QFX3500 switch



- Junos OS Release 11.4 or later for EX Series switches or Junos OS Release 12.1 or later for the QFX Series
- A DHCP server to provide IP addresses to network devices on the switch

Before you configure basic port security features, be sure you have:

- Connected the DHCP server to the switch.
- Configured a VLAN on the switch. See the task for your platform:
  - [Configuring VLANs for EX Series Switches \(CLI Procedure\)](#)
  - [“Configuring VLANs” on page 1553](#) for the QFX Series



**NOTE:** In this example, the DHCP server and its clients are all members of a single VLAN on the switch.

### Overview and Topology

Ethernet LANs are vulnerable to address spoofing and DoS attacks on network devices. To protect the devices from such attacks, you can configure:


- DHCP snooping to validate DHCP server messages
- DAI to protect against MAC spoofing
- MAC limiting to constrain the number of MAC addresses the switch adds to its MAC address cache
- MAC move limiting to help prevent MAC spoofing
- Persistent MAC learning (sticky MAC) to constrain the MAC addresses that can be learned on an interface to the first ones learned, even after a reboot of the switch
- Trusted DHCP server configured on a trusted port to protect against rogue DHCP servers sending leases

This example shows how to configure these security features on a switch connected to a DHCP server.

The setup for this example includes the VLAN **employee-vlan** on the switch. [Figure 153 on page 4138](#) illustrates the topology for this example.



Figure 153: Network Topology for Basic Port Security

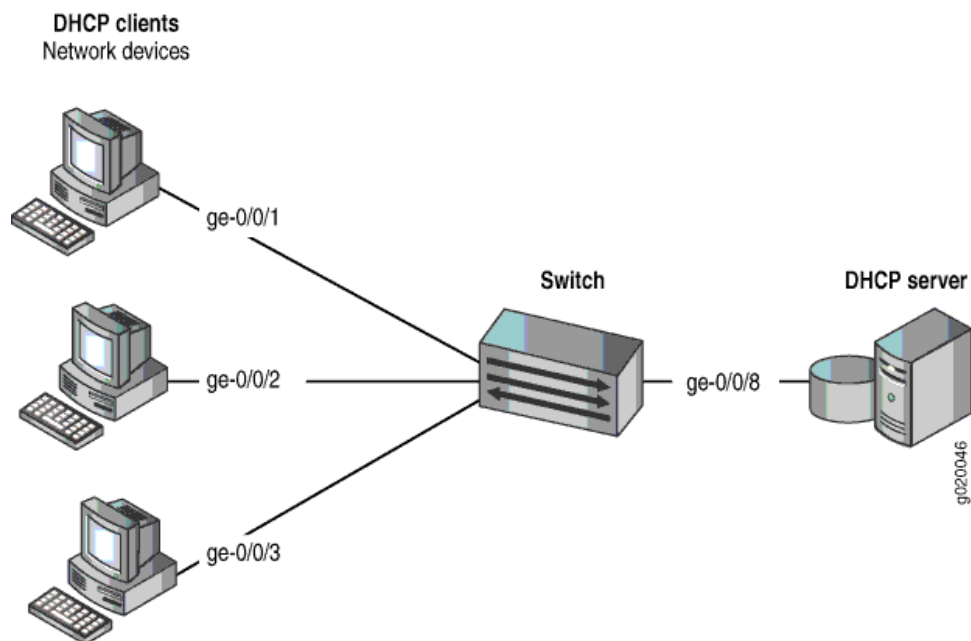

The components of the topology for this example are shown in [Table 288 on page 4138](#).

Table 288: Components of the Port Security Topology

Properties	Settings
Switch hardware	One EX Series switch or one QFX3500 switch
VLAN name and ID	<b>employee-vlan</b> , tag 20
VLAN subnets	192.0.2.16/28 192.0.2.17 through 192.0.2.30 192.0.2.31 is subnet's broadcast address
Interfaces in <b>employee-vlan</b>	ge-0/0/1, ge-0/0/2, ge-0/0/3, ge-0/0/8
Interface for DHCP server	ge-0/0/8

In this example, the switch is initially configured with the default port security setup. In the default switch configuration:

- Secure port access is activated on the switch.
- DHCP snooping and DAI are disabled on all VLANs.
- All access ports are untrusted, and all trunk ports are trusted for DHCP snooping.

In the configuration tasks for this example, you set the DHCP server as trusted; you enable DHCP snooping, DAI, and MAC move limiting on a VLAN; you set a value for a MAC limit on some interfaces; you configure some specific (allowed) MAC addresses on an interface; and you configure persistent MAC learning on an interface.



## Configuration

To configure basic port security on a switch whose DHCP server and client ports are in a single VLAN:

### CLI Quick Configuration

To quickly configure basic port security on the switch, copy the following commands and paste them into the switch terminal window:

```
[edit ethernet-switching-options secure-access-port]
set interface ge-0/0/1 mac-limit 4
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:80
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:81
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:83
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:85
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:88
set interface ge-0/0/2 mac-limit 4
set interface ge-0/0/1 persistent-learning
set interface ge-0/0/8 dhcp-trusted
set vlan employee-vlan arp-inspection
set vlan employee-vlan examine-dhcp
set vlan employee-vlan mac-move-limit 5
```

### Step-by-Step Procedure

Configure basic port security on the switch:

1. Enable DHCP snooping on the VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee-vlan examine-dhcp
```

2. Specify the interface (port) from which DHCP responses are allowed:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/8 dhcp-trusted
```

3. Enable dynamic ARP inspection (DAI) on the VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee-vlan arp-inspection
```

4. Configure a MAC limit of 4 and use the default action, **drop**. (Packets are dropped, and the MAC address is not added to the Ethernet switching table if the MAC limit is exceeded on the interfaces):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/1 mac-limit 4
user@switch# set interface ge-0/0/2 mac-limit 4
```

5. Allow learned MAC addresses for a particular interface to persist across restarts of the switch and interface-down events by enabling persistent MAC learning:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/1 persistent-learning
```

6. Configure a MAC move limit of 5 and use the default action, **drop**. (Packets are dropped, and the MAC address is not added to the Ethernet switching table if a MAC address has exceeded the MAC move limit):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee-vlan mac-move-limit 5
```

7. Configure allowed MAC addresses:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:80
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:81
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:83
```



```
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:85
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:88
```

### Results

Check the results of the configuration:

```
[edit ethernet-switching-options secure-access-port]
user@switch# show
interface ge-0/0/1.0 {
    mac-limit 4;
    persistent-learning;
}
interface ge-0/0/2.0 {
    allowed-mac [ 00:05:85:3a:82:80 00:05:85:3a:82:81 00:05:85:3a:82:83
    00:05:85:3a:82:85 00:05:85:3a:82:88 ];
    mac-limit 4;
}
interface ge-0/0/8.0 {
    dhcp-trusted;
}
vlan employee-vlan {
    arp-inspection
    examine-dhcp;
    mac-move-limit 5;
}
```

### Verification

---

To confirm that the configuration is working properly:

- [Verifying That DHCP Snooping Is Working Correctly on the Switch on page 4140](#)
- [Verifying That DAI Is Working Correctly on the Switch on page 4141](#)
- [Verifying That MAC Limiting, MAC Move Limiting, and Persistent MAC Learning Are Working Correctly on the Switch on page 4141](#)
- [Verifying That Allowed MAC Addresses Are Working Correctly on the Switch on page 4142](#)

#### ***Verifying That DHCP Snooping Is Working Correctly on the Switch***

**Purpose** Verify that DHCP snooping is working on the switch.



**Action** Send some DHCP requests from network devices (here they are DHCP clients) connected to the switch.

Display the DHCP snooping information when the interface on which the DHCP server connects to the switch is trusted. The following output results when requests are sent from the MAC addresses and the server has provided the IP addresses and leases:

```
user@switch> show dhcp snooping binding
```

DHCP Snooping Information:

MAC Address	IP Address	Lease	Type	VLAN	Interface
00:05:85:3A:82:77	192.0.2.17	600	dynamic	employee-vlan	ge-0/0/1.0
00:05:85:3A:82:79	192.0.2.18	653	dynamic	employee-vlan	ge-0/0/1.0
00:05:85:3A:82:80	192.0.2.19	720	dynamic	employee-vlan	ge-0/0/2.0
00:05:85:3A:82:81	192.0.2.20	932	dynamic	employee-vlan	ge-0/0/2.0
00:05:85:3A:82:83	192.0.2.21	1230	dynamic	employee-vlan	ge-0/0/2.0
00:05:85:27:32:88	192.0.2.22	3200	dynamic	employee-vlan	ge-0/0/2.0

**Meaning** When the interface on which the DHCP server connects to the switch has been set to trusted, the output (see preceding sample) shows, for each MAC address, the assigned IP address and lease time—that is, the time, in seconds, remaining before the lease expires.

If the DHCP server had been configured as untrusted, no entries would be added to the DHCP snooping database, and nothing would be shown in the output of the **show dhcp snooping binding** command.

#### *Verifying That DAI Is Working Correctly on the Switch*

**Purpose** Verify that DAI is working on the switch.

**Action** Send some ARP requests from network devices connected to the switch.

Display the DAI information:

```
user@switch> show arp inspection statistics
```

ARP inspection statistics:

Interface	Packets received	ARP inspection pass	ARP inspection failed
ge-0/0/1.0	7	5	2
ge-0/0/2.0	10	10	0
ge-0/0/3.0	12	12	0

**Meaning** The sample output shows the number of ARP packets received and inspected per interface, with a listing of how many packets passed and how many failed the inspection on each interface. The switch compares the ARP requests and replies against the entries in the DHCP snooping database. If a MAC address or IP address in the ARP packet does not match a valid entry in the database, the packet is dropped.

#### *Verifying That MAC Limiting, MAC Move Limiting, and Persistent MAC Learning Are Working Correctly on the Switch*

**Purpose** Verify that MAC limiting, MAC move limiting, and persistent MAC learning are working on the switch.



**Action** Suppose that two packets have been sent from hosts on **ge-0/0/1** and five packets from hosts on **ge-0/0/2**, with both interfaces set to a MAC limit of 4 with the default action **drop** and **ge-0/0/1** enabled for persistent MAC learning.

Display the MAC addresses learned:

```
user@switch> show ethernet-switching table
Ethernet-switching table: 7 entries, 4 learned, 2 persistent entries
  VLAN          MAC address      Type      Age      Interfaces
  ---          -
employee-vlan   *                Flood     -        All-members
employee-vlan   00:05:85:3A:82:77 Persistent    0        ge-0/0/1.0
employee-vlan   00:05:85:3A:82:79 Persistent    0        ge-0/0/1.0
employee-vlan   00:05:85:3A:82:80 Learn        0        ge-0/0/2.0
employee-vlan   00:05:85:3A:82:81 Learn        0        ge-0/0/2.0
employee-vlan   00:05:85:3A:82:83 Learn        0        ge-0/0/2.0
employee-vlan   00:05:85:3A:82:85 Learn        0        ge-0/0/2.0
```

Now suppose packets have been sent from two of the hosts on **ge-0/0/2** after they have been moved to other interfaces more than five times in 1 second, with **employee-vlan** set to a MAC move limit of 5 with the default action **drop**.

Display the MAC addresses in the table:

```
user@switch> show ethernet-switching table
Ethernet-switching table: 7 entries, 2 learned, 2 persistent entries
  VLAN          MAC address      Type      Age      Interfaces
  ---          -
employee-vlan   *                Flood     -        All-members
employee-vlan   00:05:85:3A:82:77 Persistent    0        ge-0/0/1.0
employee-vlan   00:05:85:3A:82:79 Persistent    0        ge-0/0/1.0
employee-vlan   00:05:85:3A:82:80 Learn        0        ge-0/0/2.0
employee-vlan   00:05:85:3A:82:81 Learn        0        ge-0/0/2.0
employee-vlan   *                Flood     -        ge-0/0/2.0
employee-vlan   *                Flood     -        ge-0/0/2.0
```

**Meaning** The first sample output shows that with a MAC limit of 4 for each interface, the fifth MAC address on **ge-0/0/2** was not learned because it exceeded the MAC limit. The second sample output shows that MAC addresses for three of the hosts on **ge-0/0/2** were not learned, because the hosts had been moved back more than five times in 1 second.

Interface **ge-0/0/1.0** was enabled for persistent MAC learning, so the MAC addresses associated with this interface are of the type **persistent**.

#### **Verifying That Allowed MAC Addresses Are Working Correctly on the Switch**

**Purpose** Verify that allowed MAC addresses are working on the switch.



**Action** Display the MAC cache information after five allowed MAC addresses have been configured on interface **ge-0/0/2**:

```
user@switch> show ethernet-switching table
Ethernet-switching table: 5 entries, 4 learned
```

VLAN	MAC address	Type	Age	Interfaces
employee-vlan	00:05:85:3A:82:80	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:81	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:83	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:85	Learn	0	ge-0/0/2.0
employee-vlan	*	Flood	-	ge-0/0/2.0

**Meaning** Because the MAC limit value for this interface has been set to 4, only four of the five configured allowed addresses are learned.

- Related Documentation**
- [Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 4155](#)
  - [Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks on page 4152](#)
  - [Example: Configuring Allowed MAC Addresses to Protect the Switch from DHCP Snooping Database Alteration Attacks on page 4167](#)
  - [Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 4162](#)
  - [Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks on page 4148](#)
  - [Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks](#)
  - [Configuring Port Security \(CLI Procedure\) on page 4186](#)
  - [Configuring Port Security \(J-Web Procedure\)](#)
  - [secure-access-port](#)
  - [secure-access-port on page 4256](#)
  - [show arp inspection statistics on page 4292](#)
  - [show dhcp snooping binding on page 4293](#)
  - [show ethernet-switching table](#)
  - [show ethernet-switching table on page 1711](#)

## Example: Configuring Storm Control

Using storm control can prevent problems caused by broadcast storms. You can configure storm control to rate-limit broadcast traffic and unknown unicast traffic at a specified level and to drop packets when the specified traffic level is exceeded, which prevents packets from proliferating and degrading service or causing a security issue. You can also



configure the switch to shut down or temporarily disable an interface when the storm control limit is exceeded.

This example shows how to configure storm control:

- [Requirements on page 4144](#)
- [Overview and Topology on page 4144](#)
- [Configuration on page 4144](#)

---

## Requirements

This example uses the following hardware and software components:

- A switch
- Junos OS Release 11.1 or later

---

## Overview and Topology

A traffic storm occurs when broadcast packets prompt receiving devices to broadcast packets in response. This prompts further responses, creating a snowball effect. The switch is flooded with packets, and the resulting unnecessary traffic leads to poor performance or even a complete loss of service by some clients. Storm control causes a device to monitor traffic levels and take a specified action when a specified traffic level—called the *storm control level*—is exceeded, thus preventing packets from proliferating and degrading service.

Storm control monitors the incoming broadcast traffic and unknown unicast traffic and compares it with the level that you specify. If broadcast traffic and unknown unicast traffic exceed the specified level, the switch drops packets for the controlled traffic types. Storm control is enabled by default on all interfaces, and the default level is 80 percent of the available bandwidth.

This example shows how to configure the storm control level on interface **xe-0/0/0** by setting the level to a traffic rate of 5000000 Kbps, based on the total of the combined broadcast and unknown unicast streams. If broadcast traffic and unknown unicast traffic exceed these levels, the switch drops packets for the controlled traffic types.

---

## Configuration

### Step-by-Step Procedure

To configure storm control for a 10-Gigabit Ethernet interface to the equivalent of 50 percent of the available bandwidth:

- Specify the level of allowed broadcast traffic and unknown unicast traffic on a specific interface:

```
[edit ethernet-switching-options]  
user@switch# set storm-control interface xe-0/0/0 bandwidth 5000000
```

**Results** Display the results of the configuration:

```
[edit ethernet-switching-options]  
user@switch# show storm-control  
interface xe-0/0/0 {
```



```
    bandwidth 5000000;
}
```

#### Related Documentation

- [Understanding Storm Control on page 4125](#)

## Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks

In a DHCP starvation attack, an attacker floods an Ethernet LAN with DHCP requests from spoofed (counterfeit) MAC addresses. The switch's trusted DHCP server or servers cannot keep up with the requests and can no longer assign IP addresses and lease times to legitimate DHCP clients on the switch. Requests from those clients are either dropped or directed to a rogue DHCP server set up by the attacker.

This example describes how to configure MAC limiting, a port security feature, to protect the switch against DHCP starvation attacks:

- [Requirements on page 4145](#)
- [Overview and Topology on page 4145](#)
- [Configuration on page 4146](#)
- [Verification on page 4147](#)

### Requirements

This example uses the following hardware and software components:

- One QFX3500 switch
- Junos OS Release 12.1 or later for the QFX Series
- A DHCP server to provide IP addresses to network devices on the switch

Before you configure MAC limiting, a port security feature, to mitigate DHCP starvation attacks, be sure you have:

- Connected the DHCP server to the switch.
- Configured the VLAN **employee-vlan** on the switch. See [“Example: Setting Up Bridging with Multiple VLANs” on page 1476](#).

### Overview and Topology


Ethernet LANs are vulnerable to address spoofing and DoS attacks on network devices. This example describes how to protect the switch against one common type of attack, a DHCP starvation attack.

This example shows how to configure port security features on a switch that is connected to a DHCP server.

The setup for this example includes the VLAN **employee-vlan** on the switch. [Figure 154 on page 4146](#) illustrates the topology for this example.



Figure 154: Network Topology for Basic Port Security

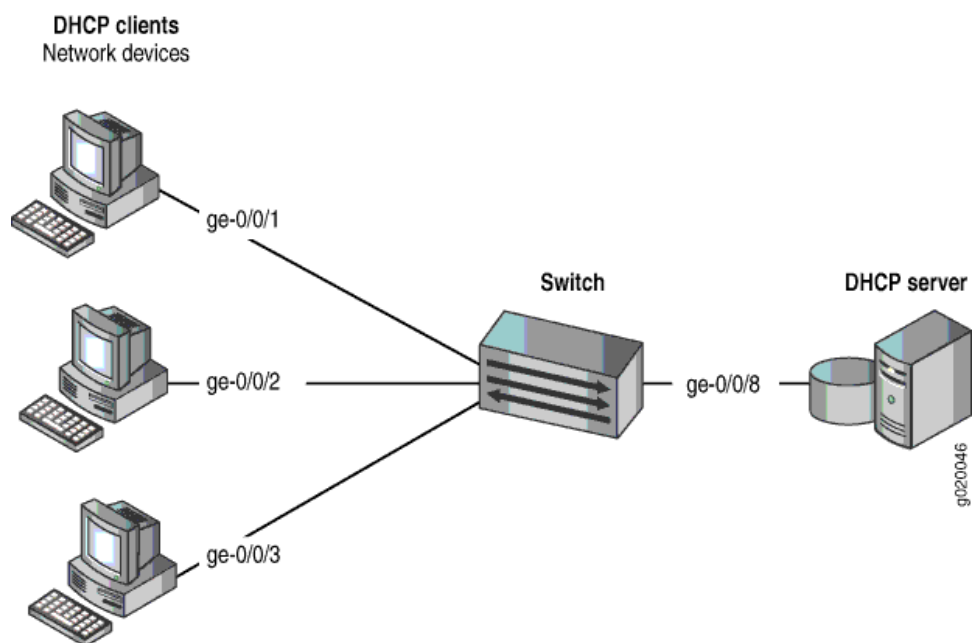

The components of the topology for this example are shown in [Table 289 on page 4146](#).

Table 289: Components of the Port Security Topology

Properties	Settings
Switch hardware	One QFX3500 switch
VLAN name and ID	<b>employee-vlan</b>
Interfaces in <b>employee-vlan</b>	<b>ge-0/0/1, ge-0/0/2, ge-0/0/3, ge-0/0/8</b>
Interface for DHCP server	<b>ge-0/0/8</b>

In this example, the switch has already been configured as follows:

- Secure port access is activated on the switch.
- No MAC limit is set on any of the interfaces.
- DHCP snooping is disabled on the VLAN **employee-vlan**.
- All access interfaces are untrusted, which is the default setting.

### Configuration

To configure the MAC limiting port security feature to protect the switch against DHCP starvation attacks:



**CLI Quick Configuration** To quickly configure MAC limiting, copy the following commands and paste them into the switch terminal window:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/1 mac-limit 3 action drop
user@switch# set interface ge-0/0/2 mac-limit 3 action drop
```

**Step-by-Step Procedure** Configure MAC limiting:

1. Configure a MAC limit of **3** on **ge-0/0/1** and specify that packets with new addresses be dropped if the limit has been exceeded on the interface:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/1 mac-limit (Access Port Security) 3 action drop
```

2. Configure a MAC limit of **3** on **ge-0/0/2** and specify that packets with new addresses be dropped if the limit has been exceeded on the interface:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/2 mac-limit 3 action drop
```

**Results** Check the results of the configuration:

```
[edit ethernet-switching-options secure-access-port]
user@switch# show
interface ge-0/0/1.0 {
    mac-limit 3 action drop;
}
interface ge-0/0/2.0 {
    mac-limit 3 action drop;
}
```

### Verification

Confirm that the configuration is working properly.

#### *Verifying That MAC Limiting Is Working Correctly on the Switch*

**Purpose** Verify that MAC limiting is working on the switch.



**Action** Send some DHCP requests from network devices (here they are DHCP clients) connected to the switch.

Display the MAC addresses learned when DHCP requests are sent from hosts on **ge-0/0/1** and from hosts on **ge-0/0/2**, with both interfaces set to a MAC limit of **3** with the action **drop**:

```
user@switch> show ethernet-switching table
Ethernet-switching table: 7 entries, 6 learned
```

VLAN	MAC address	Type	Age	Interfaces
default	*	Flood	-	ge-0/0/2.0
default	00:05:85:3A:82:77	Learn	0	ge-0/0/1.0
default	00:05:85:3A:82:79	Learn	0	ge-0/0/1.0
default	00:05:85:3A:82:80	Learn	0	ge-0/0/1.0
default	00:05:85:3A:82:81	Learn	0	ge-0/0/2.0
default	00:05:85:3A:82:83	Learn	0	ge-0/0/2.0
default	00:05:85:3A:82:85	Learn	0	ge-0/0/2.0

**Meaning** The sample output shows that with a MAC limit of **3** for each interface, the DHCP request for a fourth MAC address on **ge-0/0/2** was dropped because it exceeded the MAC limit.

Because only 3 MAC addresses can be learned on each of the two interfaces, attempted DHCP starvation attacks fail.

- Related Documentation**
- [Understanding MAC Limiting and MAC Move Limiting for Port Security on page 4119](#)
  - [Configuring MAC Limiting on page 4188](#)

## Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks

In an Ethernet switching table overflow attack, an intruder sends so many requests from new MAC addresses that the Ethernet switching table fills up and then overflows, forcing the switch to broadcast all messages.

This example describes how to configure MAC limiting and allowed MAC addresses, two port security features, to protect the switch from Ethernet switching table attacks:

- [Requirements on page 4148](#)
- [Overview and Topology on page 4149](#)
- [Configuration on page 4150](#)
- [Verification on page 4151](#)

### Requirements

This example uses the following hardware and software components:

- One EX Series switch or QFX3500 switch
- Junos OS Release 9.0 or later for EX Series switches or Junos OS 12.1 or later for the QFX Series.



- A DHCP server to provide IP addresses to network devices on the switch

Before you configure specific port security features to mitigate common access-interface attacks, be sure you have:

- Connected the DHCP server to the switch.
- Configured a VLAN on the switch. See the task for your platform:


### Overview and Topology

Ethernet LANs are vulnerable to address spoofing and DoS attacks on network devices. This example describes how to protect the switch from an attack on the Ethernet switching table that causes the table to overflow and thus forces the switch to broadcast all messages.

This example shows how to configure port security features on a switch connected to a DHCP server.

The setup for this example includes the VLAN **employee-vlan** on the switch. The procedure for creating that VLAN is described in the topic [Example: Setting Up Bridging with Multiple VLANs for EX Series Switches](#) and [“Example: Setting Up Bridging with Multiple VLANs” on page 1476](#) for the QFX Series. That procedure is not repeated here. [Figure 155 on page 4149](#) illustrates the topology for this example.

**Figure 155: Network Topology for Basic Port Security**

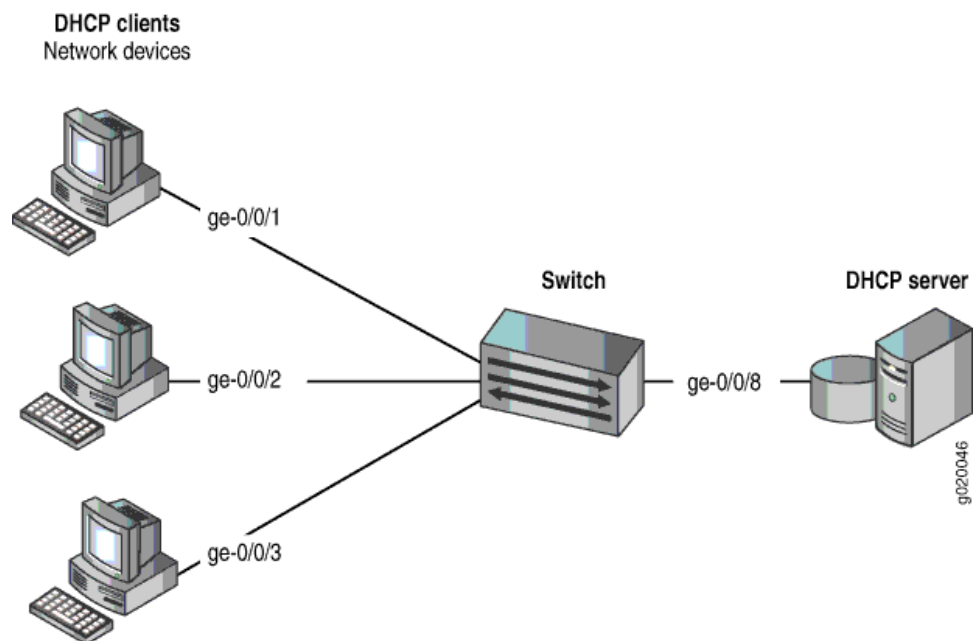

The components of the topology for this example are shown in [Table 290 on page 4150](#).



Table 290: Components of the Port Security Topology

Properties	Settings
Switch hardware	One EX Series switch or one QFX3500 switch
VLAN name and ID	<b>employee-vlan</b> , tag 20
VLAN subnets	192.0.2.16/28 192.0.2.17 through 192.0.2.30 192.0.2.31 is subnet's broadcast address
Interfaces in <b>employee-vlan</b>	ge-0/0/1, ge-0/0/2, ge-0/0/3, ge-0/0/8
Interface for DHCP server	ge-0/0/8

In this example, use the MAC limit feature to control the total number of MAC addresses that can be added to the Ethernet switching table for the specified interface. Use the allowed MAC addresses feature to ensure that the addresses of network devices whose network access is critical are guaranteed to be included in the Ethernet switching table.

In this example, the switch has already been configured as follows:

- Secure port access is activated on the switch.
- No MAC limit is set on any of the interfaces.
- All access interfaces are untrusted, which is the default setting.

### Configuration

To configure MAC limiting and some allowed MAC addresses to protect the switch against Ethernet switching table overflow attacks:

#### CLI Quick Configuration

To quickly configure MAC limiting, clear the MAC forwarding table, and configure some allowed MAC addresses, copy the following commands and paste them into the switch terminal window:

```
[edit ethernet-switching-options secure-access-port]
set interface ge-0/0/1 mac-limit 4 action drop
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:80
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:81
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:83
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:85
exit
exit
clear ethernet-switching-table interface ge-0/0/1
```

#### Step-by-Step Procedure

Configure MAC limiting and some allowed MAC addresses:

1. Configure a MAC limit of 4 on **ge-0/0/1** and specify that incoming packets with different addresses be dropped once the limit is exceeded on the interface:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/1 mac-limit (Access Port Security) 4 action drop
```



2. Clear the current entries for interface ge-0/0/1 from the MAC address forwarding table :

```
user@switch# clear ethernet-switching-table interface ge-0/0/1
```

3. Configure the allowed MAC addresses on ge-0/0/2:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:80
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:81
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:83
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:85
```

**Results** Check the results of the configuration:

```
[edit ethernet-switching-options secure-access-port]
user@switch# show
interface ge-0/0/1.0 {
  mac-limit 4 action drop;
}
interface ge-0/0/2.0 {
  allowed-mac [ 00:05:85:3a:82:80 00:05:85:3a:82:81 00:05:85:3a:82:83 00:05:85:3a:82:85 ];
}
```

### Verification

To confirm that the configuration is working properly:

- [Verifying That MAC Limiting Is Working Correctly on the Switch on page 4151](#)

#### *Verifying That MAC Limiting Is Working Correctly on the Switch*

**Purpose** Verify that MAC limiting is working on the switch.

**Action** Display the MAC cache information after DHCP requests have been sent from hosts on **ge-0/0/1**, with the interface set to a MAC limit of 4 with the action **drop**, and after four allowed MAC addresses have been configured on interface **ge-0/0/2**:

```
user@switch> show ethernet-switching table
Ethernet-switching table: 5 entries, 4 learned
```

VLAN	MAC address	Type	Age	Interfaces
employee-vlan	00:05:85:3A:82:71	Learn	0	ge-0/0/1.0
employee-vlan	00:05:85:3A:82:74	Learn	0	ge-0/0/1.0
employee-vlan	00:05:85:3A:82:77	Learn	0	ge-0/0/1.0
employee-vlan	00:05:85:3A:82:79	Learn	0	ge-0/0/1.0
employee-vlan	*	Flood	0	ge-0/0/1.0
employee-vlan	00:05:85:3A:82:80	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:81	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:83	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:85	Learn	0	ge-0/0/2.0
employee-vlan	*	Flood	-	ge-0/0/2.0

**Meaning** The sample output shows that with a MAC limit of 4 for the interface, the DHCP request for a fifth MAC address on **ge-0/0/1** was dropped because it exceeded the MAC limit and that only the specified allowed MAC addresses have been learned on the **ge-0/0/2** interface.



- Related Documentation**
- [Example: Configuring Basic Port Security Features on page 4136](#)
  - [Configuring MAC Limiting \(CLI Procedure\)](#)
  - [Configuring MAC Limiting on page 4188](#)
  - [Configuring MAC Move Limiting \(CLI Procedure\) on page 4190](#)
  - [Configuring MAC Limiting \(J-Web Procedure\)](#)

## Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks

In a rogue DHCP server attack, an attacker has introduced a rogue server into the network, allowing it to give IP address leases to the network's DHCP clients and to assign itself as the gateway device.

This example describes how to configure a DHCP server interface as untrusted to protect the switch from a rogue DHCP server:

- [Requirements on page 4152](#)
- [Overview and Topology on page 4152](#)
- [Configuration on page 4154](#)
- [Verification on page 4154](#)

### Requirements

---

This example uses the following hardware and software components:

- One EX Series switch or one QFX3500 switch
- Junos OS Release 9.0 or later for EX Series switches or Junos OS Release 12.1 or later for the QFX Series
- A DHCP server to provide IP addresses to network devices on the switch

Before you configure an untrusted DHCP server interface to mitigate rogue DHCP server attacks, be sure you have:

- Connected the DHCP server to the switch.
- Enabled DHCP snooping on the VLAN.
- Configured a VLAN on the switch. See the task for your platform:
  - [Example: Setting Up Bridging with Multiple VLANs for EX Series Switches](#)
  - ["Example: Setting Up Bridging with Multiple VLANs" on page 1476](#) for the QFX Series

### Overview and Topology


---

Ethernet LANs are vulnerable to address spoofing and DoS attacks on network devices. This example describes how to protect the switch from rogue DHCP server attacks.



This example shows how to explicitly configure an untrusted interface on an EX3200-24P switch and a QFX3500 switch. [Figure 156 on page 4153](#) illustrates the topology for this example.

**Figure 156: Network Topology for Basic Port Security**

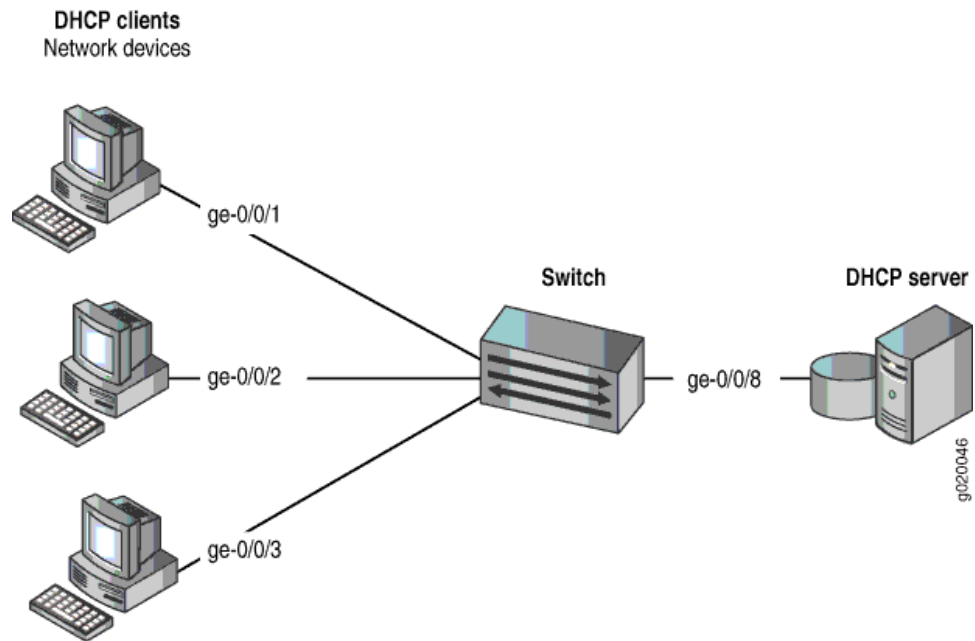

The components of the topology for this example are shown in [Table 291 on page 4153](#).

**Table 291: Components of the Port Security Topology**

Properties	Settings
Switch hardware	One EX3200-24P, 24 ports (8 PoE ports) or one QFX3500 switch
VLAN name and ID	<b>employee-vlan</b> , tag 20
VLAN subnets	192.0.2.16/28 192.0.2.17 through 192.0.2.30 192.0.2.31 is the subnet's broadcast address
Interfaces in <b>employee-vlan</b>	<b>ge-0/0/1</b> , <b>ge-0/0/2</b> , <b>ge-0/0/3</b> , <b>ge-0/0/8</b>
Interface for DHCP server	<b>ge-0/0/8</b>

In this example, the switch has already been configured as follows:

- Secure port access is activated on the switch.
- DHCP snooping is enabled on the VLAN **employee-vlan**.
- The interface (port) where the rogue DHCP server has connected to the switch is currently trusted.



## Configuration

---

To configure the DHCP server interface as untrusted because the interface is being used by a rogue DHCP server:

**CLI Quick Configuration** To quickly set the rogue DHCP server interface as untrusted, copy the following command and paste it into the switch terminal window:

```
[edit ethernet-switching-options secure-access-port]
set interface ge-0/0/8 no-dhcp-trusted
```

**Step-by-Step Procedure** To set the DHCP server interface as untrusted:

- Specify the interface (port) from which DHCP responses are not allowed:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/8 no-dhcp-trusted
```

**Results** Check the results of the configuration:

```
[edit ethernet-switching-options secure-access-port]
user@switch# show
interface ge-0/0/8.0 {
  no-dhcp-trusted;
}
```

## Verification

---

Confirm that the configuration is working properly.

### *Verifying That the DHCP Server Interface Is Untrusted*

**Purpose** Verify that the DHCP server is untrusted.

- Action**
1. Send some DHCP requests from network devices (here they are DHCP clients) connected to the switch.
  2. Display the DHCP snooping information when the port on which the DHCP server connects to the switch is not trusted.

**Meaning** There is no output from the command because no entries are added to the DHCP snooping database.

**Related Documentation**

- [Example: Configuring Basic Port Security Features on page 4136](#)
- [Enabling a Trusted DHCP Server \(CLI Procedure\) on page 4199](#)
- [Enabling a Trusted DHCP Server \(J-Web Procedure\)](#)
- [secure-access-port](#)
- [secure-access-port on page 4256](#)
- [show dhcp snooping binding on page 4293](#)



## Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch

You can configure DHCP snooping, dynamic ARP inspection (DAI), and MAC limiting on the access interfaces of switches to protect the switch and the Ethernet LAN against address spoofing and Layer 2 denial-of-service (DoS) attacks. To obtain those basic settings, you can use the switch's default configuration for port security, configure the MAC limit, and enable DHCP snooping and DAI on a VLAN. You can configure those features when the DHCP server is connected to a different switch from the one to which the DHCP clients (network devices) are connected.

This example describes how to configure port security features on a switch whose hosts obtain IP addresses and lease times from a DHCP server connected to a second switch:

- [Requirements on page 4155](#)
- [Overview and Topology on page 4155](#)
- [Configuring a VLAN, Interfaces, and Port Security Features on Switch 1 on page 4157](#)
- [Configuring a VLAN and Interfaces on Switch 2 on page 4159](#)
- [Verification on page 4160](#)

### Requirements

This example uses the following hardware and software components:

- One EX Series switch or QFX3500 switch—"Switch 1" in this example.
- An additional EX Series switch or QFX3500 switch—"Switch 2" in this example. You do not configure port security on this second switch.
- Junos OS Release 9.0 or later for EX Series switches or Junos OS Release 12.1 or later for the QFX Series.
- A DHCP server connected to Switch 2. You use the server to provide IP addresses to network devices connected to Switch 1.
- At least two network devices (hosts) that you connect to access interfaces on Switch 1. These devices are DHCP clients.

Before you configure DHCP snooping, DAI, and MAC limiting port security features, be sure you have:

- Connected the DHCP server to Switch 2.
- Configured a VLAN on the switch. See the task for your platform:
  - [Example: Setting Up Bridging with Multiple VLANs for EX Series Switches](#)
  - ["Example: Setting Up Bridging with Multiple VLANs" on page 1476](#) for the QFX Series

### Overview and Topology

Ethernet LANs are vulnerable to address spoofing and DoS attacks on network devices. To protect the devices from such attacks, you can configure:




- DHCP snooping to validate DHCP server messages
- DAI to protect against ARP spoofing
- MAC limiting to constrain the number of MAC addresses the switch adds to its MAC address cache

This example shows how to configure these port security features on Switch 1. Switch 1 is connected to another switch (Switch 2) that is not configured with port security features. That second switch is connected to a DHCP server. (See [Figure 157 on page 4156](#).) Network devices (hosts) that are connected to Switch 1 send requests for IP addresses (that is, the devices are DHCP clients). Those requests are transmitted from Switch 1 to Switch 2 and then to the DHCP server connected to Switch 2. Responses to the requests are transmitted along the reverse path of the one followed by the requests.

The setup for this example includes the VLAN **employee-vlan** on both switches.

[Figure 157 on page 4156](#) shows the network topology for the example.

**Figure 157: Network Topology for Port Security Setup with Two Switches on the Same VLAN**

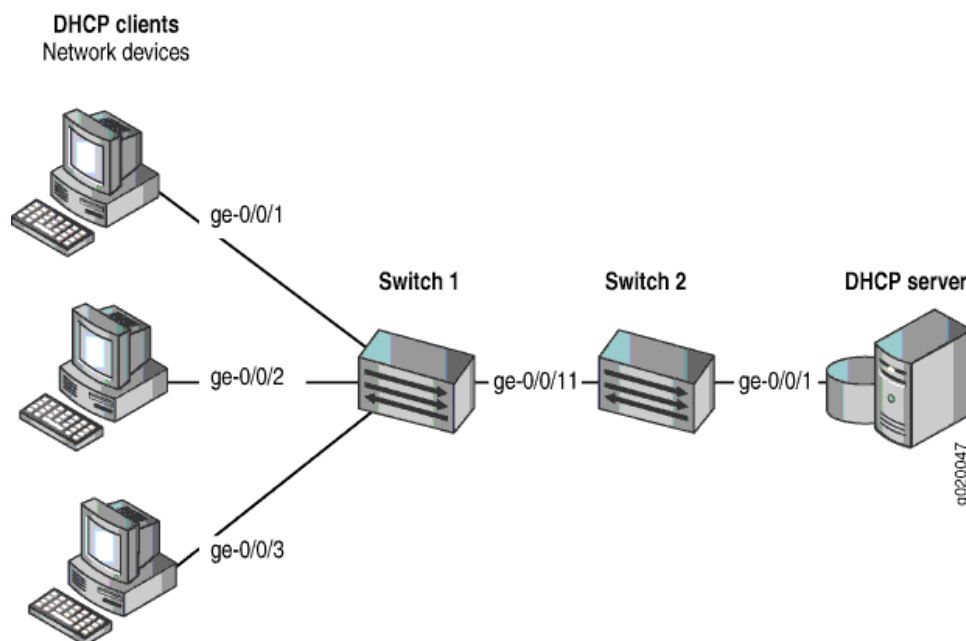

The components of the topology for this example are shown in [Table 292 on page 4156](#).

**Table 292: Components of Port Security Setup on Switch 1 with a DHCP Server Connected to Switch 2**

Properties	Settings
Switch hardware	One EX Series switch or one QFX3500 switch (Switch 1), and an additional EX Series switch or QFX3500 switch (Switch 2)
VLAN name and ID	<b>employee-vlan, tag 20</b>



**Table 292: Components of Port Security Setup on Switch 1 with a DHCP Server Connected to Switch 2** (*continued*)

Properties	Settings
VLAN subnets	192.0.2.16/28 192.0.2.17 through 192.0.2.30 192.0.2.31 is subnet's broadcast address
Trunk interface on both switches	ge-0/0/11
Access interfaces on Switch 1	ge-0/0/1, ge-0/0/2, and ge-0/0/3
Access interface on Switch 2	ge-0/0/1
Interface for DHCP server	ge-0/0/1 on Switch 2

Switch 1 is initially configured with the default port security setup. In the default configuration on the switch:

- Secure port access is activated on the switch.
- The switch does not drop any packets, which is the default setting.
- DHCP snooping and dynamic ARP inspection (DAI) are disabled on all VLANs.
- All access interfaces are untrusted and trunk interfaces are trusted; these are the default settings.

In the configuration tasks for this example, you configure a VLAN on both switches.

In addition to configuring the VLAN, you enable DHCP snooping on Switch 1. In this example, you also enable DAI and a MAC limit of 5 on Switch 1.

Because the interface that connects Switch 2 to Switch 1 is a trunk interface, you do not have to configure this interface to be trusted. As noted above, trunk interfaces are automatically trusted, so DHCP messages coming from the DHCP server to Switch 2 and then on to Switch 1 are trusted.

### Configuring a VLAN, Interfaces, and Port Security Features on Switch 1

#### CLI Quick Configuration

To quickly configure a VLAN, interfaces, and port security features, copy the following commands and paste them into the switch terminal window:

```
[edit]
set ethernet-switching-options secure-access-port interface ge-0/0/1 mac-limit 5 action drop
clear ethernet-switching table interface ge-0/0/1
set ethernet-switching-options secure-access-port vlan employee-vlan arp-inspection
set ethernet-switching-options secure-access-port vlan employee-vlan examine-dhcp
set interfaces ge-0/0/1 unit 0 family ethernet-switching vlan members 20
set interfaces ge-0/0/2 unit 0 family ethernet-switching vlan members 20
set interfaces ge-0/0/3 unit 0 family ethernet-switching vlan members 20
set interfaces ge-0/0/11 unit 0 family ethernet-switching port-mode trunk
set interfaces ge-0/0/11 unit 0 family ethernet-switching vlan members 20
set vlans employee-vlan vlan-id 20
```



**Step-by-Step Procedure** To configure MAC limiting, a VLAN, and interfaces on Switch 1 and enable DAI and DHCP on the VLAN:

1. Configure the VLAN **employee-vlan** with VLAN ID 20:  

```
[edit vlans]
user@switch1# set employee-vlan vlan-id 20
```
2. Configure an interface on Switch 1 as a trunk interface:  

```
[edit interfaces]
user@switch1# set ge-0/0/11 unit 0 family ethernet-switching port-mode trunk
```
3. Associate the VLAN with interfaces **ge-0/0/1**, **ge-0/0/2**, **ge-0/0/3**, and **ge-0/0/11**:  

```
[edit interfaces]
user@switch1# set ge-0/0/1 unit 0 family ethernet-switching vlan members 20
user@switch1# set ge-0/0/2 unit 0 family ethernet-switching vlan members 20
user@switch1# set ge-0/0/3 unit 0 family ethernet-switching vlan members 20
user@switch1# set ge-0/0/11 unit 0 family ethernet-switching vlan members 20
```
4. Enable DHCP snooping on the VLAN:  

```
[edit ethernet-switching-options secure-access-port]
user@switch1# set vlan employee-vlan examine-dhcp
```
5. Enable DAI on the VLAN:  

```
[edit ethernet-switching-options secure-access-port]
user@switch1# set vlan employee-vlan arp-inspection
```
6. Configure a MAC limit of 5 on **ge-0/0/1** and use the default action, drop (packets with new addresses are dropped if the limit has been exceeded):  

```
[edit ethernet-switching-options secure-access-port]
user@switch1# set interface ge-0/0/1 mac-limit 5 drop
```
7. Clear the existing MAC address table entries from interface **ge-0/0/1**:  

```
user@switch1# clear ethernet-switching table interface ge-0/0/1
```

**Results** Display the results of the configuration:

```
[edit]
user@switch1# show
ethernet-switching-options {
  secure-access-port {
    interface ge-0/0/1.0 {
      mac-limit 5 action drop;
    }
    vlan employee-vlan {
      arp-inspection;
      examine-dhcp;
    }
  }
}
interfaces {
  ge-0/0/1 {
    unit 0 {
      family ethernet-switching {
        vlan {
          members 20;
        }
      }
    }
  }
}
```



```

}
ge-0/0/2 {
  unit 0 {
    family ethernet-switching {
      vlan {
        members 20;
      }
    }
  }
}
ge-0/0/3 {
  unit 0 {
    family ethernet-switching {
      vlan {
        members 20;
      }
    }
  }
}
ge-0/0/11 {
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
        members 20;
      }
    }
  }
}
vpls {
  employee-vlan {
    vlan-id 20;
  }
}

```

### Configuring a VLAN and Interfaces on Switch 2

To configure the VLAN and interfaces on Switch 2:

**CLI Quick Configuration** To quickly configure the VLAN and interfaces on Switch 2, copy the following commands and paste them into the switch terminal window:

```

[edit]
set interfaces ge-0/0/1 unit 0 family ethernet-switching port-mode trunk
set interfaces ge-0/0/11 unit 0 family ethernet-switching port-mode trunk
set vpls employee-vlan vlan-id 20

```

**Step-by-Step Procedure** To configure the VLAN and interfaces on Switch 2:

1. Configure an interface on Switch 2 as a trunk interface:
 

```

[edit interfaces]
user@switch2# set ge-0/0/11 unit 0 ethernet-switching port-mode trunk

```
2. Associate the VLAN with interfaces **ge-0/0/1** and **ge-0/0/11**:
 

```

[edit interfaces]
user@switch2# set ge-0/0/1 unit 0 family ethernet-switching vlan members 20

```



```
user@switch2# set ge-0/0/11 unit 0 family ethernet-switching vlan members 20
```

**Results** Display the results of the configuration:

```
[edit]
user@switch2# show
interfaces {
  ge-0/0/1 {
    unit 0 {
      family ethernet-switching {
        vlan {
          members 20;
        }
      }
    }
  }
  ge-0/0/11 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members 20;
        }
      }
    }
  }
}
vlangs {
  employee-vlan {
    vlan-id 20;
  }
}
```

---

### Verification

To confirm that the configuration is working properly.

- [Verifying That DHCP Snooping Is Working Correctly on Switch 1 on page 4160](#)
- [Verifying That DAI Is Working Correctly on Switch 1 on page 4161](#)
- [Verifying That MAC Limiting Is Working Correctly on Switch 1 on page 4161](#)

#### ***Verifying That DHCP Snooping Is Working Correctly on Switch 1***

**Purpose** Verify that DHCP snooping is working on Switch 1.



**Action** Send some DHCP requests from network devices (here they are DHCP clients) connected to the switch.

Display the DHCP snooping information when the interface through which Switch 2 sends the DHCP server replies to clients connected to Switch 1 is trusted. The server has provided the IP addresses and leases:

```
user@switch1> show dhcp snooping binding
```

DHCP Snooping Information:

MAC Address	IP Address	Lease	Type	VLAN	Interface
00:05:85:3A:82:77	192.0.2.17	600	dynamic	employee-vlan	ge-0/0/1.0
00:05:85:3A:82:79	192.0.2.18	653	dynamic	employee-vlan	ge-0/0/1.0
00:05:85:3A:82:80	192.0.2.19	720	dynamic	employee-vlan	ge-0/0/1.0
00:05:85:3A:82:81	192.0.2.20	932	dynamic	employee-vlan	ge-0/0/1.0
00:05:85:3A:82:83	192.0.2.21	1230	dynamic	employee-vlan	ge-0/0/1.0
00:05:85:3A:82:90	192.0.2.20	932	dynamic	employee-vlan	ge-0/0/2.0
00:05:85:3A:82:91	192.0.2.21	1230	dynamic	employee-vlan	ge-0/0/3.0

**Meaning** The output shows, for each MAC address, the assigned IP address and lease time—that is, the time, in seconds, remaining before the lease expires.

#### *Verifying That DAI Is Working Correctly on Switch 1*

**Purpose** Verify that DAI is working on Switch 1.

**Action** Send some ARP requests from network devices connected to the switch.

Display the DAI information:

```
user@switch1> show arp inspection statistics
```

ARP inspection statistics:

Interface	Packets received	ARP inspection pass	ARP inspection failed
ge-0/0/1.0	7	5	2
ge-0/0/2.0	10	10	0
ge-0/0/3.0	18	15	3

**Meaning** The sample output shows the number of ARP packets received and inspected per interface, with a listing of how many packets passed and how many failed the inspection on each interface. The switch compares the ARP requests and replies against the entries in the DHCP snooping database. If a MAC address or IP address in the ARP packet does not match a valid entry in the database, the packet is dropped.

#### *Verifying That MAC Limiting Is Working Correctly on Switch 1*

**Purpose** Verify that MAC limiting is working on Switch 1.



**Action** Display the MAC addresses that are learned when DHCP requests are sent from hosts on **ge-0/0/1**:

```
user@switch1> show ethernet-switching table
```

Ethernet-switching table: 6 entries, 5 learned

VLAN	MAC address	Type	Age	Interfaces
employee-vlan	00:05:85:3A:82:77	Learn	0	ge-0/0/1.0
employee-vlan	00:05:85:3A:82:79	Learn	0	ge-0/0/1.0
employee-vlan	00:05:85:3A:82:80	Learn	0	ge-0/0/1.0
employee-vlan	00:05:85:3A:82:81	Learn	0	ge-0/0/1.0
employee-vlan	00:05:85:3A:82:83	Learn	0	ge-0/0/1.0
employee-vlan	*	Flood	-	ge-0/0/1.0

**Meaning** The sample output shows that five MAC addresses have been learned for interface **ge-0/0/1**, which corresponds to the MAC limit of **5** set in the configuration. The last line of the output shows that a sixth MAC address request was dropped, as indicated by the asterisk (\*) in the **MAC address** column.

- Related Documentation**
- [Example: Configuring Basic Port Security Features on page 4136](#)
  - [Configuring Port Security \(CLI Procedure\) on page 4186](#)
  - [Configuring Port Security \(J-Web Procedure\)](#)
  - [secure-access-port](#)
  - [secure-access-port on page 4256](#)
  - [show arp inspection statistics on page 4292](#)
  - [show dhcp snooping binding on page 4293](#)
  - [show ethernet-switching table](#)
  - [show ethernet-switching table on page 1711](#)

## Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks

In an ARP spoofing attack, the attacker associates its own MAC address with the IP address of a network device connected to the switch. Traffic intended for that IP address is now sent to the attacker instead of being sent to the intended destination. The attacker can send faked, or “spoofed,” ARP messages on the LAN.



**NOTE:** When dynamic ARP inspection (DAI) is enabled, the switch logs the number of invalid ARP packets that it receives on each interface, along with the sender's IP and MAC addresses. You can use these log messages to discover ARP spoofing on the network.



This example describes how to configure DHCP snooping and dynamic ARP inspection (DAI), two port security features, to protect the switch against ARP spoofing attacks:

- [Requirements on page 4163](#)
- [Overview and Topology on page 4163](#)
- [Configuration on page 4164](#)
- [Verification on page 4165](#)

---

## Requirements

This example uses the following hardware and software components:

- One EX Series switch or one QFX3500 switch
- Junos OS Release 11.4 or later for EX Series switches or Junos OS Release 12.1 or later for the QFX Series
- A DHCP server to provide IP addresses to network devices on the switch

Before you configure DHCP snooping and DAI (two port security features) to mitigate ARP spoofing attacks, be sure you have:

- Connected the DHCP server to the switch.
- Configured a VLAN on the switch. See the task for your platform:
  - [Example: Setting Up Bridging with Multiple VLANs for EX Series Switches](#)
  - [“Example: Setting Up Bridging with Multiple VLANs” on page 1476](#) for the QFX Series

---

## Overview and Topology


Ethernet LANs are vulnerable to address spoofing and DoS attacks on network devices. This example describes how to protect the switch against one common type of attack, an ARP spoofing attack.

In an ARP spoofing attack, the attacker sends faked ARP messages, thus creating various types of problems on the LAN—for example, the attacker might launch a man-in-the-middle attack.

This example shows how to configure port security features on a switch that is connected to a DHCP server. The setup for this example includes the VLAN **employee-vlan** on the switch. The procedure for creating that VLAN is described in the topic [Example: Setting Up Bridging with Multiple VLANs for EX Series Switches](#) and [“Example: Setting Up Bridging with Multiple VLANs” on page 1476](#) for the QFX Series. That procedure is not repeated here. [Figure 158 on page 4164](#) illustrates the topology for this example.



Figure 158: Network Topology for Basic Port Security

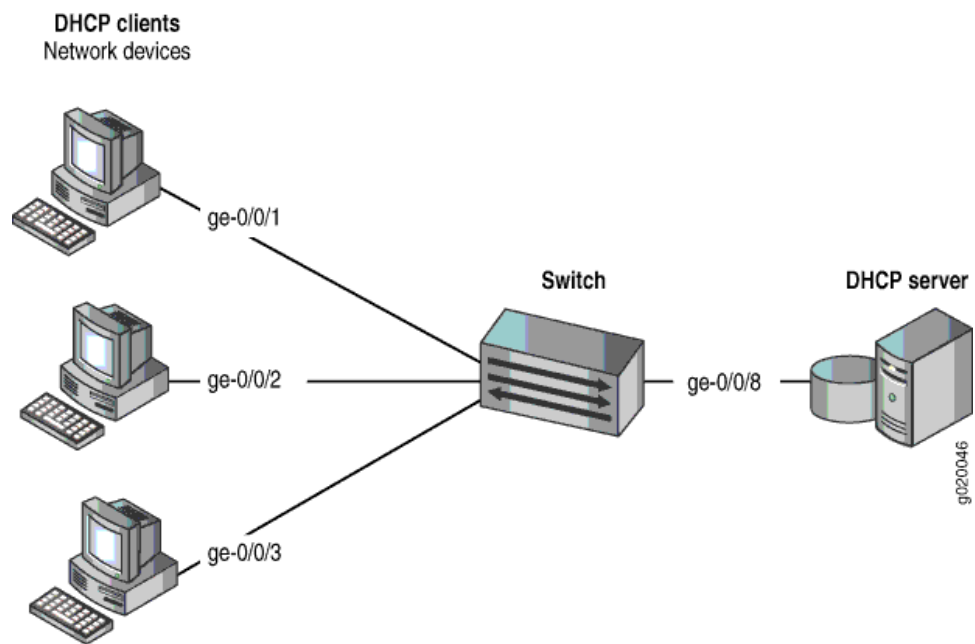

The components of the topology for this example are shown in [Table 293 on page 4164](#).

Table 293: Components of the Port Security Topology

Properties	Settings
Switch hardware	One EX3200-24P, 24 ports (8 PoE ports) or one QFX3500 switch
VLAN name and ID	<b>employee-vlan</b> , tag 20
VLAN subnets	192.0.2.16/28 192.0.2.17 through 192.0.2.30 192.0.2.31 is the subnet's broadcast address
Interfaces in <b>employee-vlan</b>	<code>ge-0/0/1</code> , <code>ge-0/0/2</code> , <code>ge-0/0/3</code> , <code>ge-0/0/8</code>
Interface for DHCP server	<code>ge-0/0/8</code>

In this example, the switch has already been configured as follows:

- Secure port access is activated on the switch.
- DHCP snooping is disabled on the VLAN **employee-vlan**.
- All access ports are untrusted, which is the default setting.

### Configuration

To configure DHCP snooping and dynamic ARP inspection (DAI) to protect the switch against ARP attacks:



**CLI Quick Configuration** To quickly configure DHCP snooping and dynamic ARP inspection (DAI), copy the following commands and paste them into the switch terminal window:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/8 dhcp-trusted
user@switch# set vlan employee-vlan examine-dhcp
user@switch# set vlan employee-vlan arp-inspection
```

**Step-by-Step Procedure** Configure DHCP snooping and dynamic ARP inspection (DAI) on the VLAN:

1. Set the **ge-0/0/8** interface as trusted:  

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/8 dhcp-trusted
```
2. Enable DHCP snooping on the VLAN:  

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee-vlan examine-dhcp
```
3. Enable DAI on the VLAN:  

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee-vlan arp-inspection
```

**Results** Check the results of the configuration:

```
[edit ethernet-switching-options secure-access-port]
user@switch# show
interface ge-0/0/8.0 {
  dhcp-trusted;
}
vlan employee-vlan {
  arp-inspection;
  examine-dhcp;
}
```

### Verification

Confirm that the configuration is working properly.

- [Verifying That DHCP Snooping Is Working Correctly on the Switch on page 4165](#)
- [Verifying That DAI Is Working Correctly on the Switch on page 4166](#)

### *Verifying That DHCP Snooping Is Working Correctly on the Switch*

**Purpose** Verify that DHCP snooping is working on the switch.



**Action** Send some DHCP requests from network devices (here they are DHCP clients) connected to the switch.

Display the DHCP snooping information when the port on which the DHCP server connects to the switch is trusted. The following output results when requests are sent from the MAC addresses and the server has provided the IP addresses and leases:

```
user@switch> show dhcp-snooping binding
DHCP Snooping Information:
MAC Address      IP Address      Lease      Type      VLAN      Interface
-----
00:05:85:3A:82:77 192.0.2.17      600      dynamic  employee-vlan ge-0/0/1.0
00:05:85:3A:82:79 192.0.2.18      653      dynamic  employee-vlan ge-0/0/1.0
00:05:85:3A:82:80 192.0.2.19      720      dynamic  employee-vlan ge-0/0/2.0
00:05:85:3A:82:81 192.0.2.20      932      dynamic  employee-vlan ge-0/0/2.0
00:05:85:3A:82:83 192.0.2.21      1230     dynamic  employee-vlan ge-0/0/2.0
00:05:85:27:32:88 192.0.2.22      3200     dynamic  employee-vlan ge-0/0/3.0
```

**Meaning** When the interface on which the DHCP server connects to the switch has been set to trusted, the output (see preceding sample) shows, for each MAC address, the assigned IP address and lease time—that is, the time, in seconds, remaining before the lease expires.

#### *Verifying That DAI Is Working Correctly on the Switch*

**Purpose** Verify that DAI is working on the switch.

**Action** Send some ARP requests from network devices connected to the switch.

Display the DAI information:

```
user@switch> show arp inspection statistics
ARP inspection statistics:
Interface      Packets received  ARP inspection pass  ARP inspection failed
-----
ge-0/0/1.0      7                 5                     2
ge-0/0/2.0     10                10                    0
ge-0/0/3.0     12                12                    0
```

**Meaning** The sample output shows the number of ARP packets received and inspected per interface, with a listing of how many packets passed and how many failed the inspection on each interface. The switch compares the ARP requests and replies against the entries in the DHCP snooping database. If a MAC address or IP address in the ARP packet does not match a valid entry in the database, the packet is dropped.

- Related Documentation**
- [Example: Configuring Basic Port Security Features on page 4136](#)
  - [Enabling DHCP Snooping \(CLI Procedure\) on page 4194](#)
  - [Enabling DHCP Snooping \(J-Web Procedure\)](#)
  - [Enabling Dynamic ARP Inspection \(CLI Procedure\) on page 4197](#)
  - [Enabling Dynamic ARP Inspection \(J-Web Procedure\)](#)



- [secure-access-port](#)
- [secure-access-port on page 4256](#)
- [show arp inspection statistics on page 4292](#)
- [show dhcp snooping binding on page 4293](#)

## Example: Configuring Allowed MAC Addresses to Protect the Switch from DHCP Snooping Database Alteration Attacks

In one type of attack on the DHCP snooping database, an intruder introduces a DHCP client on an untrusted access interface with a MAC address identical to that of a client on another untrusted interface. The intruder then acquires the DHCP lease of that other client, thus changing the entries in the DHCP snooping table. Subsequently, what would have been valid ARP requests from the legitimate client are blocked.

This example describes how to configure allowed MAC addresses, a port security feature, to protect the switch from DHCP snooping database alteration attacks:

- [Requirements on page 4167](#)
- [Overview and Topology on page 4167](#)
- [Configuration on page 4169](#)
- [Verification on page 4169](#)

### Requirements

This example uses the following hardware and software components:

- One EX Series switch or one QFX3500 switch
- Junos OS Release 11.4 or later for EX Series switches or Junos OS Release 12.1 or later for the QFX Series
- A DHCP server to provide IP addresses to network devices on the switch

Before you configure specific port security features to mitigate common access-interface attacks, be sure you have:

- Connected the DHCP server to the switch.
- Configured a VLAN on the switch. See the task for your platform:
  - [Example: Setting Up Bridging with Multiple VLANs for EX Series Switches](#)
  - [“Example: Setting Up Bridging with Multiple VLANs” on page 1476](#) for the QFX Series

### Overview and Topology


Ethernet LANs are vulnerable to address spoofing and DoS attacks on network devices. This example describes how to protect the switch from an attack on the DHCP snooping database that alters the MAC addresses assigned to some clients.



This example shows how to configure port security features on a switch that is connected to a DHCP server.

The setup for this example includes the VLAN **employee-vlan** on the switch. [Figure 159 on page 4168](#) illustrates the topology for this example.

**Figure 159: Network Topology for Basic Port Security**

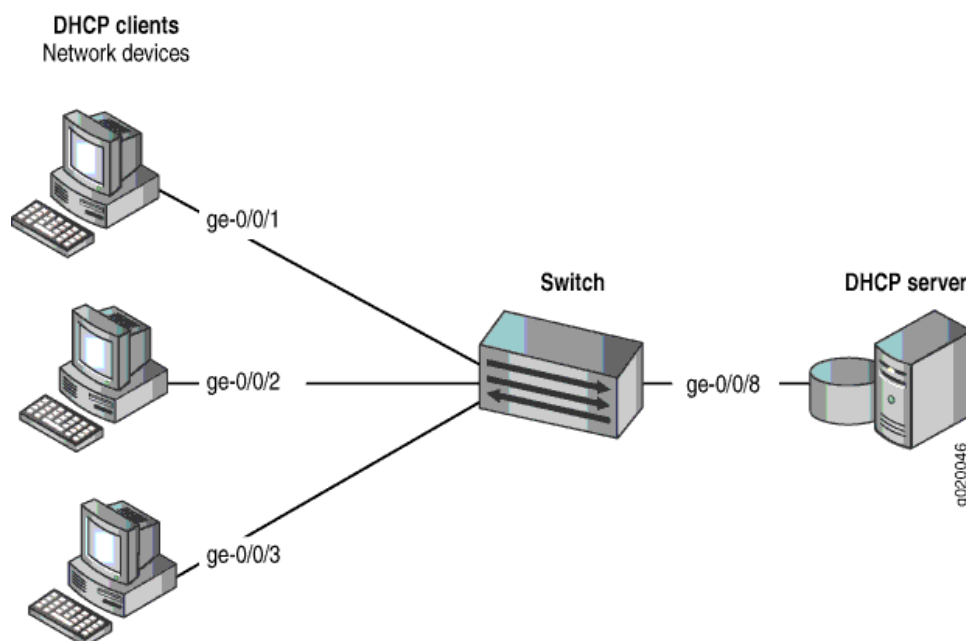

The components of the topology for this example are shown in [Table 294 on page 4168](#).

**Table 294: Components of the Port Security Topology**

Properties	Settings
Switch hardware	One EX3200-24P, 24 ports (8 PoE ports) or one QFX3500 switch
VLAN name and ID	<b>employee-vlan</b> , tag 20
VLAN subnets	192.0.2.16/28 192.0.2.17 through 192.0.2.30 192.0.2.31 is the subnet's broadcast address
Interfaces in <b>employee-vlan</b>	ge-0/0/1, ge-0/0/2, ge-0/0/3, ge-0/0/8
Interface for DHCP server	ge-0/0/8

In this example, the switch has already been configured as follows:

- Secure port access is activated on the switch.
- DHCP snooping is enabled on the VLAN **employee-vlan**.
- All access ports are untrusted, which is the default setting.



## Configuration

To configure allowed MAC addresses to protect the switch against DHCP snooping database alteration attacks:

**CLI Quick Configuration** To quickly configure some allowed MAC addresses on an interface, copy the following commands and paste them into the switch terminal window:

```
[edit ethernet-switching-options secure-access-port]
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:80
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:81
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:83
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:85
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:88
```

**Step-by-Step Procedure** To configure some allowed MAC addresses on an interface:  
Configure the five allowed MAC addresses on an interface:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:80
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:81
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:83
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:85
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:88
```

**Results** Check the results of the configuration:

```
[edit ethernet-switching-options secure-access-port]
user@switch# show
interface ge-0/0/2.0 {
    allowed-mac [ 00:05:85:3a:82:80 00:05:85:3a:82:81 00:05:85:3a:82:83 00:05:85:
:3a:82:85 00:05:85:3a:82:88 ];
}
```

## Verification

Confirm that the configuration is working properly.

- [Verifying That Allowed MAC Addresses Are Working Correctly on the Switch on page 4169](#)

*Verifying That Allowed MAC Addresses Are Working Correctly on the Switch*

**Purpose** Verify that allowed MAC addresses are working on the switch.



**Action** Display the MAC cache information:

```
user@switch> show ethernet-switching table
Ethernet-switching table: 6 entries, 5 learned
```

VLAN	MAC address	Type	Age	Interfaces
employee-vlan	00:05:85:3A:82:80	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:81	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:83	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:85	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:88	Learn	0	ge-0/0/2.0
employee-vlan	*	Flood	-	ge-0/0/2.0

**Meaning** The output shows that the five MAC addresses configured as allowed MAC addresses have been learned and are displayed in the MAC cache. The last MAC address in the list, one that had not been configured as allowed, has not been added to the list of learned addresses.

- Related Documentation**
- [Example: Configuring Basic Port Security Features on page 4136](#)
  - [Configuring MAC Limiting \(CLI Procedure\)](#)
  - [Configuring MAC Limiting \(J-Web Procedure\)](#)
  - [secure-access-port](#)
  - [secure-access-port on page 4256](#)
  - [show ethernet-switching table](#)
  - [show ethernet-switching table on page 1711](#)

## Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server

You can use DHCP option 82, also known as the DHCP relay agent information option, to help protect the switch against attacks such as spoofing (forging) of IP addresses and MAC addresses, and DHCP IP address starvation. Option 82 provides information about the network location of a DHCP client, and the DHCP server uses this information to implement IP addresses or other parameters for the client.

This example describes how to configure DHCP option 82 on a switch with DHCP clients, DHCP server, and switch all on the same VLAN:

- [Requirements on page 4170](#)
- [Overview and Topology on page 4171](#)
- [Configuration on page 4172](#)

### Requirements

This example uses the following hardware and software components:

- One EX Series switch or one QFX3500 switch



- Junos OS Release 9.3 or later for EX Series switches or Junos OS Release 12.1 or later for the QFX Series
- A DHCP server to provide IP addresses to network devices on the switch

Before you configure DHCP option 82 on the switch, be sure you have:

- Connected and configured the DHCP server.



**NOTE:** Your DHCP server must be configured to accept DHCP option 82. If it is not configured for DHCP option 82, it does not use the DHCP option 82 information in the requests sent to it when it formulates its reply messages.

- Configured the **employee** VLAN on the switch and associated the interfaces on which the clients and the server connect to the switch with that VLAN. See the task for your platform:
  - [Configuring VLANs for EX Series Switches \(CLI Procedure\)](#)
  - [“Configuring VLANs” on page 1553](#) for the QFX Series

### Overview and Topology

If DHCP option 82 is enabled on the switch, then when a network device—a DHCP client—that is connected to the switch on an untrusted interface sends a DHCP request, the switch inserts information about the client's network location into the packet header of that request. The switch then sends the request to the DHCP server. The DHCP server reads the option 82 information in the packet header and uses it to implement the IP address or other parameter for the client.

DHCP option 82 is enabled on an individual VLAN or on all VLANs on the switch.


When option 82 is enabled on the switch, then this sequence of events occurs when a DHCP client sends a DHCP request:

1. The switch receives the request and inserts the option 82 information in the packet header.
2. The switch forwards the request to the DHCP server.
3. The server uses the DHCP option 82 information to formulate its reply and sends a response back to the switch. It does not alter the option 82 information.
4. The switch strips the option 82 information from the response packet.
5. The switch forwards the response packet to the client.

[Figure 160 on page 4172](#) illustrates the topology for this example.



**Figure 160: Network Topology for Configuring DHCP Option 82 on a Switch That Is on the Same VLAN as the DHCP Clients and the DHCP Server**

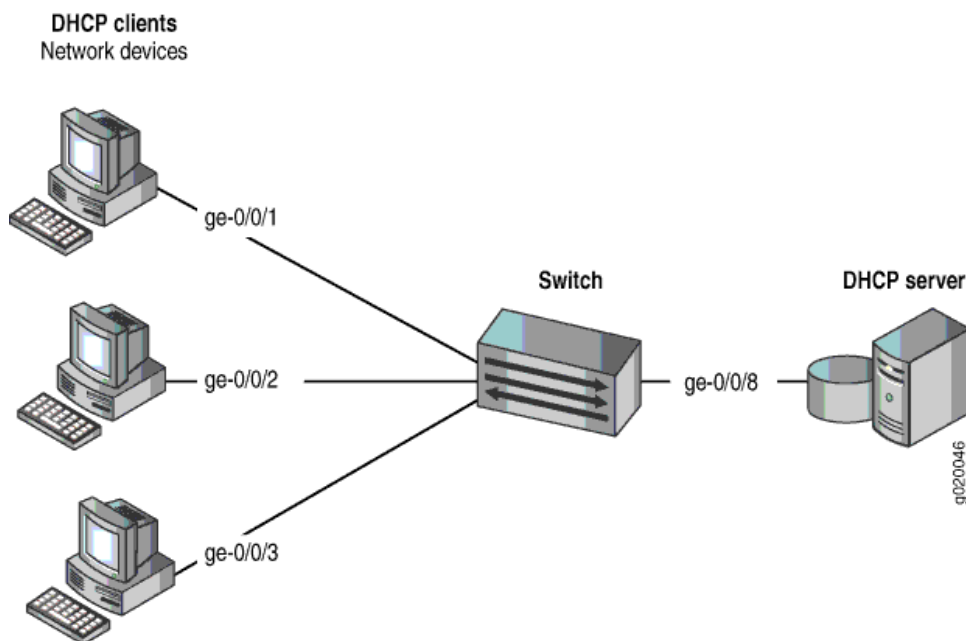

In this example, you configure DHCP option 82 on the switch. The switch connects to the DHCP server on interface `ge-0/0/8`. The DHCP clients connect to the switch on interfaces `ge-0/0/1`, `ge-0/0/2`, and `ge-0/0/3`. The switch, server, and clients are all members of the **employee** VLAN.

### Configuration

#### CLI Quick Configuration

To quickly configure DHCP option 82, copy the following commands and paste them into the switch terminal window:

```
set ethernet-switching-options secure-access-port vlan employee dhcp-option82
set ethernet-switching-options secure-access-port vlan employee dhcp-option82 circuit-id prefix
hostname
set ethernet-switching-options secure-access-port vlan employee dhcp-option82 circuit-id
use-vlan-id
set ethernet-switching-options secure-access-port vlan employee dhcp-option82 remote-id
set ethernet-switching-options secure-access-port vlan employee dhcp-option82 remote-id
prefix mac
set ethernet-switching-options secure-access-port vlan employee dhcp-option82 remote-id
use-string employee-switch1
set ethernet-switching-options secure-access-port vlan employee dhcp-option82 vendor-id
```

#### Step-by-Step Procedure

To configure DHCP option 82:

1. Specify DHCP option 82 for the **employee** VLAN:  

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82
```
2. Configure a prefix for the circuit ID suboption (the prefix is always the hostname of the switch):  

```
[edit ethernet-switching-options secure-access-port]
```



- ```
user@switch# set vlan employee dhcp-option82 circuit-id prefix hostname
```
3. Specify that the circuit ID suboption value contains the VLAN ID rather than the VLAN name (the default):
 

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 circuit-id use-vlan-id
```
  4. Specify that the remote ID suboption be included in the DHCP option 82 information:
 

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id
```
  5. Configure a prefix for the remote ID suboption (here, the prefix is the MAC address of the switch):
 

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id prefix mac
```
  6. Specify that the remote ID suboption value contain a character string (here, the string is **employee-switch1**):
 

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id use-string employee-switch1
```
  7. Configure a vendor ID suboption value, and use the default value. To use the default value, do not type a character string after the **vendor-id** option keyword:
 

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 vendor-id
```

**Results** Check the results of the configuration:

```
[edit ethernet-switching-options secure-access-port]
user@switch# show
vlan employee {
  dhcp-option82 {
    circuit-id {
      prefix hostname;
      use-vlan-id;
    }
    remote-id {
      prefix mac;
      use-string employee-switch1;
    }
    vendor-id;
  }
}
```

**Related Documentation**

- [Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 4174](#)
- [Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 4201](#)
- RFC 3046, *DHCP Relay Agent Information Option*, at <http://tools.ietf.org/html/rfc3046>.
- [secure-access-port](#)
- [secure-access-port on page 4256](#)



## Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server

You can use DHCP option 82, also known as the DHCP relay agent information option, to help protect the switch against attacks such as spoofing (forging) of IP addresses and MAC addresses, and DHCP IP address starvation. Option 82 provides information about the network location of a DHCP client, and the DHCP server uses this information to implement IP addresses or other parameters for the client.

This example describes how to configure DHCP option 82 on a switch that is on the same VLAN with the DHCP clients but on a different VLAN from the DHCP server. In this example, the switch acts as a relay agent:

- [Requirements on page 4174](#)
- [Overview and Topology on page 4175](#)
- [Configuration on page 4175](#)

### Requirements

---

This example uses the following hardware and software components:

- One EX4200-24P switch or one QFX3500 switch
- Junos OS Release 9.3 or later for EX Series switches or Junos OS Release 12.1 or later for the QFX Series
- A DHCP server to provide IP addresses to network devices on the switch

Before you configure DHCP option 82 on the switch, be sure you have:

- Connected and configured the DHCP server.



**NOTE:** Your DHCP server must be configured to accept DHCP option 82. If it is not configured for DHCP option 82, it does not use the DHCP option 82 information in the requests sent to it when it formulates its reply messages.

- Configured the **employee** VLAN on the switch and associated the interfaces on which the clients connect to the switch with that VLAN. See the task for your platform:
  - [Configuring VLANs for EX Series Switches \(CLI Procedure\)](#)
  - [“Configuring VLANs” on page 1553](#) for the QFX Series
- Configured the **corporate** VLAN for the DHCP server.
- Configured the switch as a BOOTP relay agent. See [DHCP/BOOTP Relay for Switches Overview](#).
- Configured the routed VLAN interface (RVI) to allow the switch to relay packets to the server and receive packets from the server. See [Configuring Routed VLAN Interfaces \(CLI Procedure\)](#) or [“Configuring Routed VLAN Interfaces” on page 1551](#) for the QFX Series.



## Overview and Topology

If DHCP option 82 is enabled on the switch, then when a network device—a DHCP client—that is connected to the switch on an untrusted interface sends a DHCP request, the switch inserts information about the client's network location into the packet header of that request. The switch then sends the request (in this setting, it relays the request) to the DHCP server. The DHCP server reads the option 82 information in the packet header and uses it to implement the IP address or other parameter for the client.

When option 82 is enabled on the switch, then this sequence of events occurs when a DHCP client sends a DHCP request:

1. The switch receives the request and inserts the option 82 information in the packet header.
2. The switch relays the request to the DHCP server.
3. The server uses the DHCP option 82 information to formulate its reply and sends a response back to the switch. It does not alter the option 82 information.
4. The switch strips the option 82 information from the response packet.
5. The switch forwards the response packet to the client.

In this example, you configure option 82 on the switch. The switch is configured as a BOOTP relay agent. The switch connects to the DHCP server through the routed VLAN interface (RVI) that you configured. The switch and clients are members of the **employee** VLAN. The DHCP server is a member of the **corporate** VLAN.

## Configuration

To configure DHCP option 82:

### CLI Quick Configuration

To quickly configure DHCP option 82, copy the following commands and paste them into the switch terminal window:

```
set forwarding-options helpers bootp dhcp-option82
set forwarding-options helpers bootp dhcp-option82 circuit-id prefix hostname
set forwarding-options helpers bootp dhcp-option82 circuit-id use-vlan-id
set forwarding-options helpers bootp dhcp-option82 remote-id
set forwarding-options helpers bootp dhcp-option82 remote-id prefix mac
set forwarding-options helpers bootp dhcp-option82 remote-id use-string employee-switch1
set forwarding-options helpers bootp dhcp-option82 vendor-id
```

### Step-by-Step Procedure

To configure DHCP option 82:

1. Specify DHCP option 82 for the **employee** VLAN:  

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82
```
2. Configure a prefix for the circuit ID suboption (the prefix is always the hostname of the switch):  

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 circuit-id prefix hostname
```
3. Specify that the circuit ID suboption value contains the VLAN ID rather than the VLAN name (the default):



- ```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 circuit-id use-vlan-id
```
4. Specify that the remote ID suboption be included in the DHCP option 82 information:
- ```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 remote-id
```
5. Configure a prefix for the remote ID suboption (here, the prefix is the MAC address of the switch):
- ```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 remote-id prefix mac
```
6. Specify that the remote ID suboption value contains a character string (here, the string is **employee-switch1**):
- ```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 remote-id use-string employee-switch1
```
7. Configure a vendor ID suboption value, and use the default value. To use the default value, do not type a character string after the **vendor-id** option keyword:
- ```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 vendor-id
```

**Results** Check the results of the configuration:

```
[edit forwarding-options helpers bootp]
user@switch# show
dhcp-option82 {
  circuit-id {
    prefix hostname;
    use-vlan-id;
  }
  remote-id {
    prefix mac;
    use-string employee-switch1;
  }
  vendor-id;
}
```

**Related  
Documentation**

- [Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 4170](#)
- [Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 4204](#)
- RFC 3046, *DHCP Relay Agent Information Option*, at <http://tools.ietf.org/html/rfc3046>.
- forwarding-options

---

## Firewall and Policer Configuration Tasks

- [Configuring Firewall Filters on page 4177](#)
- [Applying Firewall Filters to Interfaces on page 4180](#)
- [Assigning Forwarding Classes and Loss Priority on page 4181](#)



- [Configuring Color-Blind Egress Policers for Medium-Low PLP on page 4182](#)
- [Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183](#)

## Configuring Firewall Filters

You can configure firewall filters in a switch to control traffic that enters switch ports or enters and exits VLANs and Layer 3 (routed) interfaces. To use a firewall filter, you must configure the filter and then apply it to a port, VLAN, or Layer 3 interface.

- [Configuring a Firewall Filter on page 4177](#)
- [Applying a Firewall Filter to a Port on page 4179](#)
- [Applying a Firewall Filter to a VLAN on page 4179](#)
- [Applying a Firewall Filter to a Layer 3 \(Routed\) Interface on page 4179](#)

### Configuring a Firewall Filter

To configure a firewall filter:

1. Configure the family address type, filter name, term name, and at least one match condition—for example, match on packets that contain a specific source address:

```
[edit]
user@switch# set firewall family ethernet-switching filter ingress-port-filter term term-one
from source-address 192.0.2.14
```

For a firewall filter that is applied to a port or VLAN, specify the family address type **ethernet-switching**. For a firewall filter that is applied to a Layer 3 (routed) interface, specify the family address type **inet**.

The filter and term names can contain letters, numbers, and hyphens (-) and can be up to 64 characters long. Each filter name must be unique. A filter can contain one or more terms, and each term name must be unique within a filter.

2. Configure additional match conditions. For example, match on packets that contain a specific source port:

```
[edit firewall family ethernet-switching filter ingress-port-filter term
term-one from]
user@switch# set source-port 80
```

You can specify one or more match conditions in a single **from** statement. For a match to occur, the packet must match all the conditions in the term. The **from** statement is optional, but if included in a term, it cannot be empty. If you omit the **from** statement, all packets are considered to match.

3. If you want to apply a firewall filter to multiple interfaces and be able to see counters specific to each interface, configure the **interface-specific** option:

```
[edit firewall family ethernet-switching filter ingress-port-filter]
user@switch# set interface-specific
```

4. In each firewall filter term, specify the actions to take if the packet matches all the conditions in that term. You can specify an action and action modifiers:

- To specify a filter action, for example, to discard packets that match the conditions of the filter term:



```
[edit firewall] family ethernet-switching filter ingress-port-filter term
term-one then]
```

```
user@switch# set discard
```

You can specify no more than one action (**accept**, **discard**, **reject**, **routing-instance**, or **vlan**) per term.

- To specify action modifiers, for example, to count and classify packets to a forwarding class:

```
[edit firewall] family ethernet-switching filter ingress-port-filter term
term-one then]
```

```
user@switch# set count counter-one
```

```
user@switch# set forwarding-class expedited-forwarding
```

```
user@switch# set loss-priority high
```

You can specify any of the following action modifiers in a **then** statement:

- **analyzer *analyzer-name***—Mirror port traffic to a specified analyzer, which you must configure at the **[ethernet-switching-options]** level.
- **count *counter-name***—Count the number of packets that pass this filter term.



**NOTE:** We recommend that you configure a counter for each term in a firewall filter, so that you can monitor the number of packets that match the conditions specified in each filter term.



**NOTE:** On the QFX Series, filters automatically count packets that have been dropped on ingress because of cyclic redundancy check (CRC) errors.

- **forwarding-class *class***—Assign packets to a forwarding class.
- **log**—Log the packet header information in the Routing Engine.
- **loss-priority *priority***—Set the priority of dropping a packet.
- **policer *policer-name***—Apply rate-limiting to the traffic.
- **syslog**—Log an alert for this packet.

If you omit the **then** statement or do not specify an action, packets that match all the conditions in the **from** statement are accepted. However, you should always explicitly configure an action in the **then** statement. You can include no more than one action statement, but you can use any combination of action modifiers. For an action or action modifier to take effect, all conditions in the **from** statement must match.



**NOTE:** Implicit discard is also applicable to a firewall filter applied to the loopback interface, lo0.



### Applying a Firewall Filter to a Port

To apply a firewall filter to an ingress port:

1. Provide a meaningful description of the firewall filter in the configuration of the port to which the filter will be applied:

```
[edit]
user@switch# set interfaces ge-0/0/6 description "filter to limit tcp traffic at trunk port for employee-vlan"
```

2. Apply the filter to the interface, specifying the unit number, family address type, the direction of the filter (for packets entering the port), and the filter name:

```
[edit]
user@switch# set ge-0/0/6 unit 0 family ethernet-switching filter input ingress-port-filter
```

For firewall filters that are applied to ports, the family address type must be **ethernet-switching**.



**NOTE:** You can apply only one filter to a port for a given direction (ingress or egress).

### Applying a Firewall Filter to a VLAN

To apply a firewall filter to a VLAN:

1. Provide a meaningful description of the firewall filter in the configuration of the VLAN to which the filter will be applied:

```
[edit]
user@switch# set vlans employee-vlan vlan-id 20 description "filter to block rogue devices on employee-vlan"
```

2. Apply firewall filters to filter packets that are entering or exiting the VLAN:

- To apply a filter to match packets that are entering the VLAN:

```
[edit]
user@switch# set vlans employee-vlan vlan-id 20 filter input ingress-vlan-rogue-block
```

- To apply a firewall filter to match packets that are exiting the VLAN:

```
[edit]
user@switch# set vlans employee-vlan vlan-id 20 filter output egress-vlan-filter
```



**NOTE:** You can apply only one filter to a VLAN for a given direction (ingress or egress).

### Applying a Firewall Filter to a Layer 3 (Routed) Interface

To apply a firewall filter to a Layer 3 routed interface:

1. Provide a meaningful description of the firewall filter in the configuration of the interface to which the filter will be applied:



```
[edit]
```

```
user@switch# set interfaces ge-0/1/6 description "filter to count and monitor traffic on layer 3 interface"
```

2. You can apply firewall filters to filter packets that enter or exit a Layer 3 routed interface:

- To apply a firewall filter to filter packets that enter a Layer 3 interface:

```
[edit]
```

```
user@switch# set interfaces ge-0/1/6 unit 0 family inet filter input ingress-router-filter
```

- To apply a firewall filter to filter packets that exit a Layer 3 interface:

```
[edit]
```

```
user@switch# set interfaces ge-0/1/6 unit 0 family inet filter output egress-router-filter
```

For firewall filters applied to Layer 3 routed interfaces, the family address type must be **inet**.



**NOTE:** You can apply only one filter to an interface for a given direction (ingress or egress).

#### Related Documentation

- [Overview of Firewall Filters on page 4071](#)
- [Firewall Filter Match Conditions and Actions on page 4080](#)
- [Verifying That Firewall Filters Are Operational on page 4278](#)
- [Monitoring Firewall Filter Traffic on page 4275](#)
- [Configuring Port Mirroring on page 4328](#)

## Applying Firewall Filters to Interfaces

For a firewall filter to work, you must apply it to at least one interface. To do this, include the **filter** statement when configuring a logical interface at the **[edit interfaces]** hierarchy level:

```
[edit interfaces]
```

```
user@switch# set interface-name unit logical-unit-number family family-name filter (input | output) filter-name
```

In the **input** statement, specify a firewall filter to be evaluated when packets are received on the interface. Input filters applied to a loopback interface affect only traffic destined for the Routing Engine.

In the **output** statement, specify a filter to be evaluated when packets exit the interface. (You cannot apply an output filter to a loopback interface.)



**NOTE:** When you create a loopback interface, it is important to apply a filter to it so the Routing Engine is protected. We recommend that when you apply a filter to the loopback interface lo0, you include the **apply-groups** statement. Doing so ensures that the filter is automatically inherited on every loopback interface, including lo0 and other loopback interfaces.



**Related Documentation** • [Configuring Firewall Filters on page 4177](#)

## Assigning Forwarding Classes and Loss Priority

You can configure firewall filters to assign packet loss priority (PLP) and forwarding classes so that if congestion occurs, the marked packets can be dropped according to the priority you set. The valid match conditions are one or more of the six packet header fields: destination address, source address, IP protocol, source port, destination port, and DSCP. In other words, you can set the forwarding class and the PLP for each packet entering or an interface with a specific destination address, source address, IP protocol, source port, destination port, or DSCP.



**NOTE:** Junos OS assigns forwarding classes and PLP on ingress only. Do not use a filter that assigns forwarding classes or PLP as an egress filter.

When tricolor marking is enabled, a switch supports four PLP designations: **low**, **medium-low**, **medium-high**, and **high**. You can also specify any of the forwarding classes listed in [Table 295 on page 4181](#)

**Table 295: Unicast Forwarding Classes**

Unicast Forwarding Class	For CoS Traffic Type
be	Best-effort traffic
no-loss	Guaranteed delivery for TCP traffic
fcoe	Guaranteed delivery for Fibre Channel over Ethernet (FCoE) traffic
nc	Network-control traffic

To assign forwarding classes in firewall filters:

1. Configure the family address type and filter name:

```
[edit]
user@switch# edit firewall family ethernet-switching filter ingress-filter
```

2. Configure the terms of the filter as appropriate, including the **forwarding-class** and **loss-priority** action modifiers. For example, each of the following terms in the filter examines various packet header fields and assigns the appropriate forwarding class and packet loss priority:

- The term **corp-traffic** matches all IPv4 packets with a **10.1.1.0/24** source address and assigns the packets to forwarding class **no-loss** with a loss priority of **low**:

```
[edit firewall family ethernet-switching filter ingress-filter]
user@switch# set term corp-traffic from source-address 10.1.1.0/24;
user@switch# set term corp-traffic then forwarding-class no-loss
user@switch# set term corp-traffic then loss-priority low
```



- The term **data-traffic** matches all IPv4 packets with a **10.1.2.0/24** source address and assigns the packets to forwarding class **be** (best effort) with a loss priority of **medium-high**:

```
[edit firewall family ethernet-switching filter ingress-filter]
user@switch# set term data-traffic from source-address 10.1.2.0/24;
user@switch# set term data-traffic then forwarding-class be
user@switch# set term data-traffic then loss-priority medium-high
```

- Because the loss of network-generated packets can jeopardize proper network operation, the delay of these packets is preferable to discarding these packets. The term **network-traffic** assigns the packets with an IP precedence of **net-control** to forwarding class **nc** (network control) with a loss priority of **low**:

```
[edit firewall family ethernet-switching filter ingress-filter]
user@switch# set term network-traffic from precedence net-control
user@switch# set term network-traffic then forwarding-class nc
user@switch# set term network-traffic then loss-priority low
```

- The last term **accept-traffic** matches any packets that did not match on any of the preceding terms and assigns the packets to forwarding class **be** with a loss priority of **high**:

```
[edit firewall family ethernet-switching filter ingress-filter]
user@switch# set term accept-traffic then forwarding-class be
user@switch# set term accept-traffic then loss-priority high
```

3. Apply the filter **ingress-filter** to a port, VLAN, or Layer 3 interface. For information about applying the filter, see [“Configuring Firewall Filters” on page 4177](#). (Assigning forwarding classes and PLP is supported only on ingress filters.)

#### Related Documentation

- [Configuring Firewall Filters on page 4177](#)
- [Verifying That Firewall Filters Are Operational on page 4278](#)
- [Monitoring Firewall Filter Traffic on page 4275](#)
- [Overview of Policers on page 4096](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Understanding CoS Forwarding Classes on page 4860](#)

## Configuring Color-Blind Egress Policers for Medium-Low PLP

If you use color-blind mode and want to configure an egress policer that marks packets to have medium-low PLP, you must configure a single-rate two-color policer at the **[edit firewall policer *policer-name*]** hierarchy level, because color-blind mode does not support medium-low priority. For example:

1. Specify the name of the policer, the bandwidth limit in bits per second (bps) to control the traffic rate on an interface, and the maximum allowed burst size to control the amount of traffic bursting:

```
[edit]
user@switch# set firewall policer policer-name if-exceeding bandwidth-limit bytes
burst-size-limit bytes
```

2. Specify medium-low loss priority for matching packets:



```
[edit]
```

```
user@switch# set firewall policer policer-name then loss-priority medium-low;
```

3. Apply the filter to a port, VLAN, or Layer 3 interface.

#### Related Documentation

- [Overview of Policers on page 4096](#)
- [Understanding Color-Blind Mode for Single-Rate Tricolor Marking on page 4100](#)
- [Understanding Color-Blind Mode for Two-Rate Tricolor Marking on page 4103](#)
- [Configuring Firewall Filters on page 4177](#)
- [Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183](#)

## Configuring Two-Color and Three-Color Policers to Control Traffic Rates

You can rate-limit traffic by configuring a policer and specifying it as an action modifier for a term in a firewall filter. By default, if you specify the same policer in multiple terms, Junos OS creates a separate policer instance for each term and applies rate limiting separately for each instance. For example, if you configure a policer to discard traffic that exceeds 1 Gbps and reference that policer in three different terms, each policer instance enforces a 1-Gbps limit. In this case, the total bandwidth allowed by the filter is 3 Gbps.

You can also configure a policer to be filter-specific, which means that Junos OS creates only one policer instance regardless of how many times the policer is referenced. When you do this, rate limiting is applied in aggregate, so if you configure a policer to discard traffic that exceeds 1 Gbps and reference that policer in three different terms, the total bandwidth allowed by the filter is 1 Gbps.



**NOTE:** You can include two-color policer actions on ingress firewall filters only. You can include three-color policer actions on ingress and egress filters.

1. [Configuring Two-Color Policers on page 4183](#)
2. [Configuring Three-Color Policers on page 4184](#)
3. [Specifying Policers in a Firewall Filter Configuration on page 4184](#)
4. [Applying a Firewall Filter That Includes a Policer on page 4185](#)

### Configuring Two-Color Policers

To configure a two-color policer:

1. Specify the name of the policer, the bandwidth limit to control the traffic rate on an interface, and the maximum allowed burst size to control the amount of traffic bursting:

```
[edit firewall]
```

```
user@switch# set policer policer-name <filter-specific> if-exceeding bandwidth-limit bps  
burst-size-limit bytes
```

The policer name can contain letters, numbers, and hyphens (-) and can have as many as 64 characters.



The range for the bandwidth limit is 32000 (32k) through 102,300,000,000 (102300m) bps.

To determine the value for the burst-size limit, multiply the bandwidth of the interface on which the filter is applied by the amount of time to allow a burst of traffic at that bandwidth to occur and divide the result by 8:

**maximum burst size = (interface bandwidth) X (allowable time for burst) / (8 bits/byte)**

The range for the burst-size limit is 1 through 2,147,450,880 bytes.

2. Specify the policer action to discard or assign a loss priority to packets that exceed the rate limits:

```
[edit firewall policer policer-name]  
user@switch# set then (discard | loss-priority low | loss-priority high)
```

---

### Configuring Three-Color Policers

To configure a three-color policer:

1. Specify the name of the policer and (optionally) whether to automatically discard packets with high loss priority (PLP):

```
[edit firewall]  
user@switch# set three-color-policer policer-name  
user@switch# set three-color-policer policer-name action loss-priority high then discard
```

2. Specify whether the three-color policer should be single-rate or two-rate and whether it should be color-aware or color-blind:

```
[edit firewall three-color-policer policer-name]  
user@switch# set (single-rate | two-rate) (color-aware | color-blind)
```

3. For single-rate three-color policers, configure the CIR, CBS, and EBS:

```
[edit firewall three-color-policer policer-name single-rate]  
user@switch# set committed-information-rate bps  
user@switch# set committed-burst-size bytes  
user@switch# set excess-burst-size bytes
```

4. For two-rate three-color policers, configure the CIR, CBS, PIR, and PBS:

```
[edit firewall three-color-policer policer-name single-rate]  
user@switch# set committed-information-rate bps  
user@switch# set committed-burst-size bytes  
user@switch# set peak-information-rate bps  
user@switch# set peak-burst-size bytes
```

---

### Specifying Policers in a Firewall Filter Configuration

To use a two-color policer, configure a filter term that includes the action **policer**:

```
[edit firewall family family-name]  
user@switch# set filter filter-name term name then name
```

For example, the following commands apply a two-color policer to all packets sent from 192.0.2.0/24.

```
[edit firewall family family-name]  
user@switch# set filter limit—hosts term term1 from source-address 192.0.2.0/24  
user@switch# set filter limit—hosts term term1 then policer policer1
```



To use a three-color policer, configure a filter term that includes the action **three-color-policer**:

```
[edit firewall family name]
user@switch# set filter name term name from match-condition
user@switch# set filter name term name then three-color-policer (single-rate | two-rate) name
```

For example, the following commands apply a single-rate three-color policer to all packets received or sent by interface **ge-0/0/6** (depending on whether the filter is an ingress or egress filter).

```
[edit firewall family name]
user@switch# set filter srTCM term term-one from interface ge-0/0/6
user@switch# set filter srTCM term term-one then three-color-policer single-rate srTCM1-ca
```

You must specify whether the three-color policer is single-rate or two-rate, and this must match the policer itself. Otherwise, the configuration listing includes an error message indicating that the three-color policer you referenced in the filter does not exist.

### Applying a Firewall Filter That Includes a Policer

A firewall filter that includes one or more policer action modifiers must be applied to a port, VLAN, or Layer 3 interface like any other filter. For information about applying firewall filters, see “Configuring Firewall Filters” on page 4177.



**NOTE:** You can include two-color policer actions on ingress firewall filters only. You can include three-color policer actions on ingress and egress filters.

#### Related Documentation

- [Configuring Firewall Filters on page 4177](#)
- [Overview of Policers on page 4096](#)
- [Verifying That Two-Color Policers Are Operational on page 4286](#)
- [Verifying That Three-Color Policers Are Operational on page 4285](#)
- [Configuring Color-Blind Egress Policers for Medium-Low PLP on page 4182](#)

## Port Security Configuration Tasks

- [Configuring Port Security \(CLI Procedure\) on page 4186](#)
- [Configuring MAC Limiting on page 4188](#)
- [Configuring MAC Move Limiting \(CLI Procedure\) on page 4190](#)
- [Configuring Autorecovery for MAC Limited or Storm Control Interfaces \(CLI Procedure\) on page 4192](#)
- [Configuring the none Action to Override a MAC Limit Applied to All Interfaces \(CLI Procedure\) on page 4192](#)
- [Configuring Static ARP Entries on page 4193](#)
- [Configuring Static IP Addresses for DHCP Bindings on Access Ports \(CLI Procedure\) on page 4193](#)
- [Configuring Unknown Unicast Forwarding on page 4194](#)



- [Enabling DHCP Snooping \(CLI Procedure\) on page 4194](#)
- [Enabling Dynamic ARP Inspection \(CLI Procedure\) on page 4197](#)
- [Enabling a Trusted DHCP Server \(CLI Procedure\) on page 4199](#)
- [Enabling a Trusted Port for DHCP on page 4200](#)
- [Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 4201](#)
- [Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 4204](#)

## Configuring Port Security (CLI Procedure)

Ethernet LANs are vulnerable to attacks such as address spoofing and Layer 2 denial of service (DoS) on network devices. Port security features such as DHCP snooping, DAI (dynamic ARP inspection), MAC limiting, MAC move limiting, and persistent MAC learning, as well as trusted DHCP server, help protect the access ports on the switch against the losses of information and productivity that can result from such attacks.

Depending on the particular feature, you can configure the port security feature either on:

- VLANs—A specific VLAN or all VLANs
- Interfaces—A specific interface or all interfaces



**NOTE:** If you configure one of the port security features on all VLANs or all interfaces, the switch software enables that port security feature on all VLANs and all interfaces that are not explicitly configured with other port security features.

However, if you do explicitly configure one of the port security features on a specific VLAN or on a specific interface, you must explicitly configure any additional port security features that you want to apply to that VLAN or interface. Otherwise, the switch software automatically applies the default values for the feature.

For example, if you enable DHCP snooping on all VLANs and decide to explicitly enable IP source guard only on a specific VLAN, you must also explicitly enable DHCP snooping on that specific VLAN. Otherwise, the default value of no DHCP snooping applies to that VLAN.

---

To configure port security features using the CLI:

- [Enabling DHCP Snooping on page 4187](#)
- [Enabling Dynamic ARP Inspection \(DAI\) on page 4187](#)
- [Limiting Dynamic MAC Addresses on an Interface on page 4187](#)
- [Enabling Persistent MAC Learning on an Interface on page 4187](#)



- [Limiting MAC Address Movement on page 4188](#)
- [Configuring Trusted DHCP Servers on an Interface on page 4188](#)

### Enabling DHCP Snooping

You can configure DHCP snooping to allow the device to monitor DHCP messages received, ensure that hosts only use the IP addresses assigned to them, and allow access only to authorized DHCP servers.

To enable DHCP snooping:

- On a specific VLAN:
 

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan default examine-dhcp
```
- On all VLANs:
 

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan all examine-dhcp
```

### Enabling Dynamic ARP Inspection (DAI)

You can enable DAI to protect against ARP spoofing. To enable DAI:

- On a single VLAN (here, the VLAN is **employee-vlan**):
 

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee-vlan arp-inspection
```
- On all VLANs:
 

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan all arp-inspection
```

### Limiting Dynamic MAC Addresses on an Interface

Limit the number of dynamic MAC addresses allowed on an interface and specify the action to take if the limit is exceeded—for example, set a MAC limit of **5** with an action of **drop**:

- On a single interface:
 

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/1 mac-limit 5 action drop
```
- On all interfaces:
 

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface all mac-limit 5 action drop
```

You can also specify the actions **log** (do not drop the packet but generate an alarm, an SNMP trap, or a system log entry), **none** (no action), or **shutdown** (disable the interface and generate an alarm) to occur if the number of dynamic MAC addresses is exceeded.

### Enabling Persistent MAC Learning on an Interface

You can configure learned MAC addresses to persist on an interface across restarts of the switch:

```
[edit ethernet-switching-options secure-access-port]
```



```
user@switch# set interface ge-0/0/1 persistent-learning
```

### Limiting MAC Address Movement

---

You can limit the number of times a MAC address can move from its original interface in 1 second—for example, set a MAC move limit of 5 with an action of **drop** if the limit is exceeded:

- On a single VLAN (here, the VLAN is **employee-vlan**):  

```
[edit ethernet-switching-options secure-access-port]  
user@switch# set vlan employee-vlan mac-move-limit 5 action drop
```
- On all VLANs:  

```
[edit ethernet-switching-options secure-access-port]  
user@switch# set vlan all mac-move-limit 5 action drop
```

You can also specify the actions **log** (do not drop the packet but generate an alarm, an SNMP trap, or a system log entry), **none** (no action), or **shutdown** (disable the interface or VLAN and generate an alarm) to occur if the MAC address moves more than the specified number of times in 1 second.

### Configuring Trusted DHCP Servers on an Interface

---

Configure a trusted DHCP server on an interface:

```
[edit ethernet-switching-options secure-access-port]  
user@switch# set interface ge-0/0/1 dhcp-trusted
```

#### Related Documentation

- [Configuring Port Security \(J-Web Procedure\)](#)
- [Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\)](#)
- [Example: Configuring Basic Port Security Features on page 4136](#)
- [Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 4155](#)
- [Monitoring Port Security on page 4277](#)
- [Port Security Overview on page 4108](#)
- [secure-access-port](#)
- [secure-access-port on page 4256](#)

## Configuring MAC Limiting

To configure MAC limiting on a specific interface or on all interfaces:

1. To limit the number of dynamic MAC addresses, set a MAC limit of 5.

The action is not specified, so the switch performs the default action **drop** if the limit is exceeded:

- On a single interface (here, the interface is **xe-0/0/1**):  

```
[edit ethernet-switching-options secure-access-port]
```



```
user@switch# set interface xe-0/0/1 mac-limit (Access Port Security) 5
```

- On all interfaces:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface all mac-limit 5
```



**CAUTION:** Do not set the MAC limit to 1. The first learned MAC address is often inserted into the forwarding database automatically. (For instance, the first MAC address inserted into the forwarding database for routed VLAN interfaces is the MAC address of the RVI. For Aggregated Ethernet bundles using LACP, the first MAC address inserted into the forwarding database in the forwarding table is the source address of the protocol packet.) The switch therefore fails to learn MAC addresses other than the automatic addresses when the MAC limit is set to 1, and this causes problems with MAC learning and forwarding.

2. To specify allowed MAC addresses:

- On a single interface (here, the interface is `xe-0/0/2`):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface xe-0/0/2 allowed-mac 00:05:85:3A:82:80
user@switch# set interface xe-0/0/2 allowed-mac 00:05:85:3A:82:81
user@switch# set interface xe-0/0/2 allowed-mac 00:05:85:3A:82:83
```

- On all interfaces:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface all allowed-mac 00:05:85:3A:82:80
user@switch# set interface all allowed-mac 00:05:85:3A:82:81
user@switch# set interface all allowed-mac 00:05:85:3A:82:83
```

#### Related Documentation

- [Port Security Overview on page 4108](#)
- [Understanding MAC Limiting and MAC Move Limiting for Port Security on page 4119](#)
- [Overview of Access Port Protection on page 4105](#)
- [Verifying That MAC Limiting Is Working Correctly on page 4280](#)
- [Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks on page 4148](#)
- [Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks on page 4145](#)
- [no-allowed-mac-log on page 4251](#)



## Configuring MAC Move Limiting (CLI Procedure)

When MAC move limiting is configured, MAC address movements are tracked by the switch and, if a MAC address changes more than the configured number of times within 1 second, the changes to MAC addresses are dropped, logged, ignored, or the interface is shut down.



**NOTE:** Although you enable this feature on VLANs, the MAC move limitation pertains to the number of movements for each individual MAC address rather than the total number of MAC address moves in the VLAN. For example, if the MAC move limit is set to 1, the switch allows an unlimited number of MAC address movements within the VLAN as long as the same MAC address does not change more than once.

You configure MAC move limiting per VLAN, not per interface (port). In the default configuration, the number of MAC moves permitted is unlimited.

You can choose to have one of the following actions performed when the MAC move limit is exceeded:

- **drop**—Drop the packet and generate a system log entry. This is the default.
- **log**—Do not drop the packet but generate a system log entry.
- **none**—Take no action.
- **shutdown**—Disable the interfaces in the VLAN and generate a system log entry. If you have configured the switch with the **port-error-disable** statement, the disabled interfaces recover automatically upon expiration of the specified disable timeout. If you have not configured the switch for autorecovery from port error disabled conditions, you can bring up the disabled interfaces by running the **clear ethernet-switching port-error** command.



To configure a MAC move limit for MAC addresses within a specific VLAN or for MAC addresses within all VLANs, using the CLI:

- On a single VLAN: To limit the number of MAC address movements that can be made by an individual MAC address within the VLAN **employee-vlan**, set a MAC move limit of 5:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee-vlan mac-move-limit 5
```

The action is not specified, so the switch performs the default action **drop** if it tracks that an individual MAC address within the **employee-vlan** has moved more than 5 times within one second.

- On all VLANs: To limit the number of MAC movements that can be made by individual MAC addresses within all VLANs, set a MAC move limit of 5:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan all mac-move-limit 5
```

The action is not specified, so the switch performs the default action **drop** if it tracks that an individual MAC address within any of the VLANs has moved more than 5 times within 1 second.

#### Related Documentation

- [Configuring MAC Move Limiting \(J-Web Procedure\)](#)
- [Example: Configuring Basic Port Security Features on page 4136](#)
- [Verifying That MAC Move Limiting Is Working Correctly on page 4283](#)
- [Monitoring Port Security on page 4277](#)
- [Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\)](#)
- [Understanding MAC Limiting and MAC Move Limiting for Port Security on EX Series Switches](#)
- [Understanding MAC Limiting and MAC Move Limiting for Port Security on page 4119](#)
- [clear ethernet-switching port-error](#)
- [clear ethernet-switching port-error on page 4290](#)
- [port-error-disable on page 4253](#)
- [port-error-disable on page 4253](#)
- [secure-access-port](#)
- [secure-access-port on page 4256](#)



## Configuring Autorecovery for MAC Limited or Storm Control Interfaces (CLI Procedure)

An Ethernet access interface might shut down or be disabled as a result of one of the following configurations:

- MAC limiting—**mac-limit** statement is configured with action **shutdown**.
- MAC move limiting—**mac-move-limit** statement is configured with action **shutdown**.
- Storm control—**storm-control** statement is configured with the action **shutdown**.

You can configure a device to automatically restore the disabled interfaces to service after a specified period of time. Autorecovery applies to all the interfaces that have been disabled due to MAC limiting, MAC move limiting, or storm control errors.

To configure autorecovery from the disabled state due to MAC limiting, MAC move limiting, or storm control shutdown actions:

```
[edit ethernet-switching-options]
user@switch# set port-error-disable disable-timeout seconds
```



**NOTE:** You must specify the disable timeout value—there is no default disable timeout period. If you do not specify a timeout value, you must use the [clear ethernet-switching port-error](#) command to clear the errors and restore the interfaces to service.

### Related Documentation

- [Understanding MAC Limiting and MAC Move Limiting for Port Security on page 4119](#)
- [Configuring MAC Limiting on page 4188](#)
- [Configuring MAC Move Limiting \(CLI Procedure\) on page 4190](#)
- [Understanding Storm Control on page 4125](#)

## Configuring the none Action to Override a MAC Limit Applied to All Interfaces (CLI Procedure)

If you set a MAC limit in your port security settings to apply to all interfaces, you can override that setting for a particular interface by specifying the action **none**.

To use the **none** action to override a MAC limit setting:

1. Set the MAC limit for all interfaces—for example, a limit of **5** with action **drop**:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface all mac-limit (Access Port Security) 5 action drop
```

2. Change the action for one interface with this command.

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface xe-0/0/2 mac-limit action none
```

### Related Documentation

- [Configuring MAC Limiting on page 4188](#)
- [Example: Configuring Basic Port Security Features on page 4136](#)



- [Verifying That MAC Limiting Is Working Correctly on page 4280](#)
- [Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks on page 4148](#)
- [Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks](#)

## Configuring Static ARP Entries

You can create static ARP table entries, which are explicit mappings between IP addresses and MAC addresses.

- To configure a static ARP entry:

```
[edit interfaces interface-name unit logical-unit-number family inet address
address]
user@switch# set arp ip-address (mac | multicast-mac) mac-address
```

The IP address that you specify must be part of the subnet defined in the enclosing **address** statement.

To associate a multicast MAC address with a unicast IP address, use the **multicast-mac** statement.

Specify the MAC address as 6 hexadecimal bytes in one of the following formats: *nnnn.nnnn.nnnn* or *nn:nn:nn:nn:nn:nn*; for example, 0011.2233.4455 or 00:11:22:33:44:55.

### Related Documentation

- [Understanding Static ARP Entries on page 4124](#)
- [arp on page 1580](#)

## Configuring Static IP Addresses for DHCP Bindings on Access Ports (CLI Procedure)

You can add static (fixed) IP addresses and bind them to fixed MAC addresses in the DHCP snooping database. These bindings are labeled as “static” in the database, while those bindings that have been added through the process of DHCP snooping are labeled “dynamic.”

To configure a static IP address/MAC address binding in the DHCP snooping database (replace **ge-0/0/2**, **10.0.10.12**, **data-vlan**, and **00:05:85:3A:82:80** with values for your configuration):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/2 static-ip 10.0.10.12 vlan data-vlan mac 00:05:85:3A:82:80
```

To view results of the configuration steps before committing the configuration, type the **show** command at the user prompt.

To commit these changes to the active configuration, type the **commit** command at the user prompt.

### Related Documentation

- [Verifying That DHCP Snooping Is Working Correctly on page 4279](#)
- [Understanding DHCP Snooping for Port Security on page 4110](#)
- [secure-access-port](#)



- [secure-access-port on page 4256](#)

## Configuring Unknown Unicast Forwarding

Unknown unicast packets have unknown destination MAC addresses. By default, these packets are flooded out all the ports in the VLAN, which can trigger a traffic storm and cause security issues and performance degradation.

To prevent storms, configure a VLAN to forward unknown unicast traffic to a trunk port. The destination MAC address can be learned from the trunk port and added to the Ethernet switching table. You can configure different VLANs to forward unknown unicast traffic to different trunk interfaces or use one trunk interface for multiple VLANs.

To configure unknown unicast forwarding options using the CLI:



**NOTE:** Before you can configure unknown unicast forwarding within a VLAN, you must first configure that VLAN.

1. Configure unknown unicast forwarding for a specific VLAN:

```
[edit ethernet-switching-options]
user@switch# set unknown-unicast-forwarding vlan VLAN-name
```

2. Specify the trunk interface to which unknown unicast traffic will be forwarded:

```
[edit ethernet-switching-options ]
user@switch# set unknown-unicast-forwarding vlan VLAN-name interface (Unknown Unicast Forwarding) interface-name
```

### Related Documentation

- [Understanding Unknown Unicast Forwarding on page 4126](#)
- [Verifying That Unknown Unicast Packets Are Forwarded to a Trunk Interface on page 4286](#)
- [Understanding Storm Control on page 4125](#)
- [Example: Configuring Storm Control on page 4143](#)
- [Configuring VLANs on page 1553](#)

## Enabling DHCP Snooping (CLI Procedure)

DHCP snooping allows the switch to monitor and control DHCP messages received from untrusted devices connected to the switch. It builds and maintains a database of valid IP-address/MAC-address (IP-MAC) bindings called the DHCP snooping database.





.....

**NOTE:** If you configure DHCP snooping for all VLANs and you enable a different port security feature on a specific VLAN, you must also explicitly enable DHCP snooping on that VLAN. Otherwise, the default value of no DHCP snooping applies to that VLAN.

.....

This topic describes:

- [Enabling DHCP Snooping on page 4196](#)
- [Applying CoS Forwarding Classes to Prioritize Snooped Packets on page 4196](#)



## Enabling DHCP Snooping

You configure DHCP snooping per VLAN, not per interface (port). By default, DHCP snooping is disabled for all VLANs. You can enable DHCP snooping on all VLANs or on specific VLANs.

To enable DHCP snooping on a VLAN or all VLANs:

- On a specific VLAN:

```
[edit ethernet-switching-options secure-access port]
user@switch# set vlan vlan-name examine-dhcp
```

- On all VLANs:

```
[edit ethernet-switching-options secure-access port]
user@switch# set vlan all examine-dhcp
```



**TIP:** By default, the IP-MAC bindings are lost when the switch is rebooted and DHCP clients (the network devices, or hosts) must reacquire bindings. However, you can configure the bindings to persist by setting the `dhcp-snooping-file` statement to store the database file either locally or remotely.



**TIP:** For private VLANs (PVLANS), enable DHCP snooping on the primary VLAN. If you enable DHCP snooping only on a community VLAN, DHCP messages coming from PVLAN trunk ports are not snooped.

## Applying CoS Forwarding Classes to Prioritize Snooped Packets

On EX Series switches you might need to use class of service (CoS) to protect packets from critical applications from being dropped during periods of network congestion and delay and you might also need the port security features of DHCP snooping on the same ports through which those critical packets are entering and leaving.



**NOTE:** This is not supported on the QFX Series switch.

To apply CoS forwarding classes and queues to snooped packets:

1. Create a user-defined forwarding class to be used for prioritizing snooped packets:

```
[edit class-of-service]
user@switch# set forwarding-classes class class-name queue queue-number
```

2. Enable DHCP snooping on a specific VLAN or on all VLANs and apply the desired forwarding class on the snooped packets:

- On a specific VLAN:

```
[edit ethernet-switching-options secure-access port]
user@switch# set vlan vlan-name examine-dhcp forwarding-class class-name
```



- On all VLANs:

```
[edit ethernet-switching-options secure-access port]
user@switch# set vlan all examine-dhcp forwarding-class class-name
```

#### Related Documentation

- [Enabling DHCP Snooping \(J-Web Procedure\)](#)
- [Example: Configuring Basic Port Security Features on page 4136](#)
- [Example: Configuring DHCP Snooping, DAI , and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 4155](#)
- [Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 4162](#)
- [Example: Using CoS Forwarding Classes to Prioritize Snooped Packets in Heavy Network Traffic](#)
- [Verifying That DHCP Snooping Is Working Correctly on page 4279](#)
- [Monitoring Port Security on page 4277](#)
- [Understanding DHCP Snooping for Port Security on page 4110](#)
- [class-of-service on page 5179](#)
- [secure-access-port](#)
- [secure-access-port on page 4256](#)

### Enabling Dynamic ARP Inspection (CLI Procedure)

Dynamic ARP inspection (DAI) protects switches against ARP spoofing. DAI inspects ARP packets on the LAN and uses the information in the DHCP snooping database on the switch to validate ARP packets and to protect against ARP cache poisoning.

This topic describes:

- [Enabling DAI on page 4198](#)
- [Applying CoS Forwarding Classes to Prioritize Inspected Packets on page 4198](#)



## Enabling DAI

---

You configure DAI for each VLAN, not for each interface (port). By default, DAI is disabled for all VLANs.

To enable DAI on a VLAN or all VLANs:

- On a single VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan vlan-name arp-inspection
```

- On all VLANs:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan all arp-inspection
```

## Applying CoS Forwarding Classes to Prioritize Inspected Packets

---

You might need to use class of service (CoS) to protect packets from critical applications from being dropped during periods of network congestion and delay and you might also need the port security features of DHCP snooping on the same ports through which those critical packets are entering and leaving.

To apply CoS forwarding classes and queues to DAI packets:

1. Create a user-defined forwarding class to be used for prioritizing DAI packets:

```
[edit class-of-service]
user@switch# set forwarding-classes class class-name queue queue-number
```

2. Enable DAI on a specific VLAN or on all VLANs and apply the desired forwarding class on the DAI packets:

- On a specific VLAN:

```
[edit ethernet-switching-options secure-access port]
user@switch# set vlan vlan-name arp-inspection forwarding-class class-name
```

- On all VLANs:

```
[edit ethernet-switching-options secure-access port]
user@switch# set vlan all arp-inspection forwarding-class class-name
```

### Related Documentation

- Enabling Dynamic ARP Inspection (J-Web Procedure)
- [Example: Configuring Basic Port Security Features on page 4136](#)
- [Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 4155](#)
- [Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 4162](#)
- [Example: Using CoS Forwarding Classes to Prioritize Snooped Packets in Heavy Network Traffic](#)
- [Verifying That DAI Is Working Correctly on page 4278](#)
- [Monitoring Port Security on page 4277](#)



- [Understanding DAI for Port Security on page 4117](#)
- [Understanding DAI for Port Security on page 4117](#)
- [class-of-service on page 5179](#)
- [secure-access-port](#)
- [secure-access-port on page 4256](#)

## Enabling a Trusted DHCP Server (CLI Procedure)

You can configure any interface on a switch that connects to a DHCP server as a trusted interface (port). Configuring a DHCP server on a trusted interface protects against rogue DHCP servers sending leases.

You configure a trusted DHCP server on an interface, not on a VLAN. By default, all access interfaces are untrusted, and all trunk interfaces are trusted.

To configure a trusted interface for a DHCP server by using the CLI (here, the interface is **ge-0/0/8**):

```
[edit ethernet-switching-options secure-access port]
user@switch# set interface ge-0/0/8 dhcp-trusted
```

### Related Documentation

- [Enabling a Trusted DHCP Server \(J-Web Procedure\)](#)
- [Example: Configuring Basic Port Security Features on page 4136](#)
- [Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks on page 4152](#)
- [Verifying That a Trusted DHCP Server Is Working Correctly on page 4284](#)
- [Monitoring Port Security on page 4277](#)
- [Understanding Trusted DHCP Servers for Port Security on page 4121](#)
- [secure-access-port](#)
- [secure-access-port on page 4256](#)



## Enabling a Trusted Port for DHCP

By default, all access ports are untrusted and all trunk ports are trusted with regard to DHCP. Trusted ports allow DHCP servers to provide IP addresses and other information to requesting devices. Untrusted ports drop traffic from DHCP servers to prevent unauthorized servers from providing any configuration information to clients.

If you attach a DHCP server to an access port, you must configure it as trusted. You configure a trusted DHCP server on an interface, not on a VLAN.



**NOTE:** Before you attach a DHCP server to a trusted access port, ensure that the server is physically secure—that is, that access to the server is monitored and controlled.

- To configure a trusted interface for a DHCP server by using the CLI (here, the interface is **xe-0/0/8**):

```
[edit ethernet-switching-options secure-access port]
user@switch# set interface xe-0/0/8 dhcp-trusted
```

### Related Documentation

- Enabling a Trusted DHCP Server (J-Web Procedure)
- [Example: Configuring Basic Port Security Features on page 4136](#)
- [Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks on page 4152](#)
- [Verifying That a Trusted DHCP Server Is Working Correctly on page 4284](#)
- [Monitoring Port Security on page 4277](#)
- [Understanding Trusted and Untrusted Ports on page 4121](#)



## Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure)

You can use DHCP option 82, also known as the DHCP relay agent information option, to help protect the switch against attacks such as spoofing (forging) of IP addresses and MAC addresses, and DHCP IP address starvation. Option 82 provides information about the network location of a DHCP client, and the DHCP server uses this information to implement IP addresses or other parameters for the client.

You can configure the DHCP option 82 feature in two topologies:

- The switch, DHCP clients, and DHCP server are all on the same VLAN. The switch forwards the clients' requests to the server and forwards the server's replies to the clients. This topic describes this configuration.
- The switch functions as a relay agent when the DHCP clients or the DHCP server is connected to the switch through a Layer 3 interface. On the switch, these interfaces are configured as routed VLAN interfaces, or RVIs. The switch relays the clients' requests to the server and then forwards the server's replies to the clients. This configuration is described in [“Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server \(CLI Procedure\)”](#) on page 4204.

Before you configure DHCP option 82 on the switch, perform these tasks:

- Connect and configure the DHCP server.



**NOTE:** Your DHCP server must be configured to accept DHCP option 82. If the server is not configured for DHCP option 82, the server does not use the DHCP option 82 information in the requests sent to it when it formulates its reply messages.

- Configure a VLAN on the switch and associate the interfaces on which the clients and the server connect to the switch with that VLAN.



To configure DHCP option 82:



**NOTE:** Replace values displayed in *italics* with values for your configuration.

1. Specify DHCP option 82 for all VLANs associated with the switch or for a specified VLAN. (You can also configure the feature for a VLAN range.)

- On a specific VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82
```

- On all VLANs:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan all dhcp-option82
```

The remaining steps are optional.

2. To configure a prefix for the circuit ID suboption (the prefix is always the hostname of the switch):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 circuit-id prefix hostname
```

3. To specify that the circuit ID suboption value should contain the interface description rather than the interface name (the default):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 circuit-id use-interface-description
```

4. To specify that the circuit ID suboption value should contain the VLAN ID rather than the VLAN name (the default):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 circuit-id use-vlan-id
```

5. To specify that the remote ID suboption be included in the DHCP option 82 information:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id
```

6. To configure a prefix for the remote ID suboption (here, the prefix is the MAC address of the switch):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id prefix mac
```

7. To specify that the prefix for the remote ID suboption be the hostname of the switch rather than the MAC address of the switch (the default):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id prefix hostname
```

8. To specify that the remote ID suboption value should contain the interface description:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id use-interface-description
```

9. To specify that the remote ID suboption value should contain a character string:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id use-string mystring
```

10. To configure a vendor ID suboption and use the default value (the default value is **Juniper**), do not type a character string after the **vendor-id** option keyword:

```
[edit ethernet-switching-options secure-access-port]
```



```
user@switch# set vlan employee dhcp-option82 vendor-id
```

11. To specify that the vendor ID suboption value should contain a character string value that you specify rather than **Juniper** (the default):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 vendor-id mystring
```

To view results of the configuration steps before committing the configuration, type the **show** command at the user prompt.

To commit these changes to the active configuration, type the **commit** command at the user prompt.

#### Related Documentation

- [Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 4170](#)
- [secure-access-port](#)
- [secure-access-port on page 4256](#)
- [Understanding DHCP Option 82 for Port Security on EX Series Switches](#)
- [Understanding DHCP Option 82 for Port Security on page 4122](#)
- [RFC 3046, DHCP Relay Agent Information Option](#), at <http://tools.ietf.org/html/rfc3046>.



## Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure)

You can use DHCP option 82, also known as the DHCP relay agent information option, to help switches against attacks such as spoofing (forging) of IP addresses and MAC addresses, and DHCP IP address starvation. Option 82 provides information about the network location of a DHCP client, and the DHCP server uses this information to implement IP addresses or other parameters for the client.

You can configure the DHCP option 82 feature in two topologies:

- The switch functions as a relay agent when the DHCP clients or the DHCP server is connected to the switch through a Layer 3 interface. On the switch, these interfaces are configured as routed VLAN interfaces, or RVIs. The switch relays the clients' requests to the server and then forwards the server's replies to the clients. This topic describes this configuration.
- The switch, DHCP clients, and DHCP server are all on the same VLAN. The switch forwards the clients' requests to the server and forwards the server's replies to the clients. This configuration is described in [“Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\)” on page 4201](#).

Before you configure DHCP option 82 on the switch, perform these tasks:

- Connect and configure the DHCP server.



.....  
**NOTE:** Your DHCP server must be configured to accept DHCP option 82. If the server is not configured for DHCP option 82, the server does not use the DHCP option 82 information in the requests sent to it when it formulates its reply messages.  
.....

- Configure the VLAN on the switch and associate the interfaces on which the clients connect to the switch with that VLAN.
- Configure the routed VLAN interface (RVI) to allow the switch to relay packets to the server and receive packets from the server. See [Configuring Routed VLAN Interfaces \(CLI Procedure\)](#) or [“Configuring Routed VLAN Interfaces” on page 1551](#) for the QFX Series.
- Configure the switch as a BOOTP relay agent. See [DHCP/BOOTP Relay for Switches Overview](#).



To configure DHCP option 82:



**NOTE:** Replace values displayed in *italics* with values for your configuration.

1. Specify DHCP option 82 for the BOOTP server:

- On all interfaces that connect to the server:

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82
```

- On a specific interface that connects to the server:

```
[edit forwarding-options helpers bootp]
user@switch# set interface ge-0/0/10 dhcp-option82
```

The remaining steps are optional. They show configurations for all interfaces; include the specific interface designation to configure any of the following options on a specific interface:

2. To configure a prefix for the circuit ID suboption (the prefix is always the hostname of the switch):

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 circuit-id prefix hostname
```

3. To specify that the circuit ID suboption value should contain the interface description rather than the interface name (the default):

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 circuit-id use-interface-description
```

4. To specify that the circuit ID suboption value should contain the VLAN ID rather than the VLAN name (the default):

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 circuit-id use-vlan-id
```

5. To specify that the remote ID suboption be included in the DHCP option 82 information:

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 remote-id
```

6. To configure a prefix for the remote ID suboption (here, the prefix is the MAC address of the switch):

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 remote-id prefix mac
```

7. To specify that the prefix for the remote ID suboption be the hostname of the switch rather than the MAC address of the switch (the default):

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 remote-id prefix hostname
```

8. To specify that the remote ID suboption value should contain the interface description:

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 remote-id use-interface-description
```

9. To specify that the remote ID suboption value should contain a character string:

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 remote-id use-string mystring
```

10. To configure a vendor ID suboption and use the default value (the default value is **Juniper**), do not type a character string after the **vendor-id** option keyword:



```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 vendor-id
```

11. To specify that the vendor ID suboption value contains a character string value that you specify rather than **Juniper** (the default):

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 vendor-id mystring
```

To view results of the configuration steps before committing the configuration, type the **show** command at the user prompt.

To commit these changes to the active configuration, type the **commit** command at the user prompt.

#### Related Documentation

- [Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 4174](#)
- [edit forwarding-options] Configuration Statement Hierarchy on EX Series Switches
- Understanding DHCP Option 82 for Port Security on EX Series Switches
- [Understanding DHCP Option 82 for Port Security on page 4122](#)
- RFC 3046, *DHCP Relay Agent Information Option*, at <http://tools.ietf.org/html/rfc3046>.



## Configuration Statements for Firewall Filters

### family

**Syntax**

```
family family-name {
  filter filter-name {
    interface-specific;
    term term-name {
      from {
        match-conditions;
      }
      then {
        action;
        action-modifiers;
      }
    }
  }
}
```

**Hierarchy Level** [edit [firewall](#)]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure a firewall filter for IP version 4 or IP version 6.

**Options** *family-name*—Type of addressing protocol:

- **ethernet-switching**—Filter Layer 2 Ethernet packets and Layer 3 (IP) packets (allows some Layer 3 filtering).
- **inet**—Filter Layer 3 IPv4 packets (provides additional Layer 3 filter options).
- **inet6**—Filter Layer 3 IPv6 packets (provides additional Layer 3 filter options).

The remaining statements are explained separately.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Firewall Filter Match Conditions and Actions on page 4080](#)
- [Configuring Firewall Filters on page 4177](#)
- [Overview of Firewall Filters on page 4071](#)



## filter

---

**Syntax**    `filter filter-name {  
                  interface-specific;  
                  term term-name {  
                    from {  
                      match-conditions;  
                    }  
                    then {  
                      action;  
                      action-modifiers;  
                    }  
                  }  
                }`

**Hierarchy Level**    [edit `firewall family family-name`]

**Release Information**    Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Configure firewall filters.

**Options**    *filter-name*—Name that identifies the filter. The name can contain letters, numbers, and hyphens (-), and can be up to 64 characters long. To include spaces in the name, enclose it in quotation marks.

The remaining statements are explained separately.

**Required Privilege Level**    firewall—To view this statement in the configuration.  
                                  firewall-control—To add this statement to the configuration.

**Related Documentation**

- [Firewall Filter Match Conditions and Actions on page 4080](#)
- [Configuring Firewall Filters on page 4177](#)
- [Overview of Firewall Filters on page 4071](#)



## filter (Layer 2 and Layer 3 Interfaces)

<b>Syntax</b>	<code>filter (input   output) <i>filter-name</i>;</code>
<b>Hierarchy Level</b>	[ <a href="#">edit interfaces</a> <i>interface-name</i> <a href="#">unit</a> <i>logical-unit-number</i> <a href="#">family</a> <i>family-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Apply a firewall filter to traffic transiting a port or Layer 3 interface.
<b>Default</b>	All incoming traffic is accepted unmodified on the port or Layer 3 interface, and all outgoing traffic is sent unmodified from the port or Layer 3 interface.
<b>Options</b>	<p><b><i>filter-name</i></b>—Name of a firewall filter defined at the [<a href="#">edit firewall family <i>family-name</i> filter</a>] hierarchy level.</p> <p><b>input</b>—Apply a firewall filter to traffic entering the port or Layer 3 interface.</p> <p><b>output</b>—Apply a firewall filter to traffic exiting the port or Layer 3 interface.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Configuring Gigabit Ethernet Interfaces (CLI Procedure)</li> <li><a href="#">Configuring Firewall Filters on page 4177</a></li> <li><a href="#">Overview of Firewall Filters on page 4071</a></li> </ul>



## filter (VLANs)

---

<b>Syntax</b>	<code>filter (input   output) <i>filter-name</i>;</code>
<b>Hierarchy Level</b>	[edit <b>vlan</b> <i>vlan-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Apply a firewall filter to traffic ingressing or egressing a VLAN.
<b>Default</b>	All incoming traffic is accepted unmodified to a VLAN, and all outgoing traffic is sent unmodified from a VLAN.
<b>Options</b>	<p><b><i>filter-name</i></b>—Name of a firewall filter defined at the [edit firewall family <i>family-name</i> filter] hierarchy level.</p> <p><b>input</b>—Apply a firewall filter to VLAN ingress traffic.</p> <p><b>output</b>—Apply a firewall filter to VLAN egress traffic.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Firewall Filters on page 4177</a></li><li>• <a href="#">Overview of Firewall Filters on page 4071</a></li></ul>



## firewall

```
Syntax  firewall {
        family family-name {
            filter filter-name {
                interface-specific;
                term term-name {
                    from {
                        match-conditions;
                    }
                    then {
                        action;
                        action-modifiers;
                    }
                }
            }
        }
        policer policer-name {
            filter-specific;
            if-exceeding {
                bandwidth-limit bps;
                burst-size-limit bytes;
            }
            then {
                policer-action;
            }
        }
        three-color-policer policer-name {
            action {
                loss-priority high then discard;
            }
            single-rate {
                (color-aware | color-blind);
                committed-information-rate bps;
                committed-burst-size bytes;
                excess-burst-size bytes;
            }
            two-rate {
                (color-aware | color-blind);
                committed-information-rate bps;
                committed-burst-size bytes;
                peak-information-rate bps;
                peak-burst-size bytes;
            }
        }
    }
```

Hierarchy Level [\[edit\]](#)

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure firewall filters and policers.

The remaining statements are explained separately.



<b>Required Privilege Level</b>	firewall—To view this statement in the configuration. firewall-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Firewall Filter Match Conditions and Actions on page 4080</a></li><li>• <a href="#">Configuring Firewall Filters on page 4177</a></li><li>• <a href="#">Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183</a></li><li>• <a href="#">Overview of Firewall Filters on page 4071</a></li></ul>

---

## from

---

<b>Syntax</b>	<pre>from {     match-conditions; }</pre>
<b>Hierarchy Level</b>	[edit <b>firewall family</b> <i>family-name</i> <b>filter</b> <i>filter-name</i> <b>term</b> <i>term-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Match packet fields to values specified in a match condition. If the <b>from</b> statement is not included in a firewall filter configuration, all packets are considered to match and the actions and action modifiers in the <b>then</b> statement are implemented.
<b>Options</b>	<b>match-conditions</b> —Conditions that define the values or fields that the incoming or outgoing packets must contain for a match. You can specify one or more match conditions. If you specify more than one, they all must match for a match to occur and for the action in the <b>then</b> statement to be implemented.
<b>Required Privilege Level</b>	firewall—To view this statement in the configuration. firewall-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Firewall Filter Match Conditions and Actions on page 4080</a></li><li>• <a href="#">Configuring Firewall Filters on page 4177</a></li><li>• <a href="#">Understanding Firewall Filter Match Conditions on page 4077</a></li></ul>



## interface-specific

---

<b>Syntax</b>	interface-specific;
<b>Hierarchy Level</b>	[edit <b>firewall</b> family <i>family-name</i> <b>filter</b> <i>filter-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure separate counters for each interface to which a filter is applied.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Firewall Filter Match Conditions and Actions on page 4080</a></li> <li>• <a href="#">Configuring Firewall Filters on page 4177</a></li> <li>• <a href="#">Overview of Firewall Filters on page 4071</a></li> </ul>

## term

---

<b>Syntax</b>	<pre>term <i>term-name</i> {     from {         <i>match-conditions</i>;     }     then {         <i>action</i>;         <i>action-modifiers</i>;     } }</pre>
<b>Hierarchy Level</b>	[edit <b>firewall</b> family <i>family-name</i> <b>filter</b> <i>filter-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Define a firewall filter term.
<b>Options</b>	<p><b><i>term-name</i></b>—Name that identifies the term. The name can contain letters, numbers, and hyphens (-), and can be up to 64 characters long. To include spaces in the name, enclose it in quotation marks.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	firewall—To view this statement in the configuration. firewall-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Firewall Filter Match Conditions and Actions on page 4080</a></li> <li>• <a href="#">Configuring Firewall Filters on page 4177</a></li> <li>• <a href="#">Overview of Firewall Filters on page 4071</a></li> </ul>



## then (Filters)

---

<b>Syntax</b>	<pre>then {     action;     action-modifiers; }</pre>
<b>Hierarchy Level</b>	[edit <b>firewall family</b> <i>family-name</i> <b>filter</b> <i>filter-name</i> <b>term</b> <i>term-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure a firewall filter action.
<b>Options</b>	<p><b>action</b>—Actions to accept, discard, or forward packets that match all conditions specified in a filter term.</p> <p><b>action-modifiers</b>—Additional actions to analyze, classify, count, or police packets that match all conditions specified in a filter term.</p>
<b>Required Privilege Level</b>	<p>firewall—To view this statement in the configuration.</p> <p>firewall-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Firewall Filter Match Conditions and Actions on page 4080</a></li><li>• <a href="#">Configuring Firewall Filters on page 4177</a></li><li>• <a href="#">Understanding Firewall Filter Match Conditions on page 4077</a></li></ul>

## Configuration Statements for Policers

---

### action

---

<b>Syntax</b>	<pre>action {     loss-priority high then discard; }</pre>
<b>Hierarchy Level</b>	[edit <b>firewall three-color-policer</b> <i>name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Discard traffic on a logical interface using tricolor marking policing.
<b>Options</b>	The statements are explained separately.
<b>Required Privilege Level</b>	<p>firewall—To view this statement in the configuration.</p> <p>firewall-control—To add this statement to the configuration.</p>



## bandwidth-limit

---

<b>Syntax</b>	<code>bandwidth-limit <i>bps</i>;</code>
<b>Hierarchy Level</b>	[edit <code>firewall policer <i>policer-name</i> if-exceeding</code> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify the traffic rate in bits per second.
<b>Options</b>	<p><b><i>bps</i></b>—Traffic rate in bits per second. Specify <i>bps</i> as a decimal value or as a decimal number followed by one of the abbreviation <b>k</b> (1000), <b>m</b> (1,000,000), or <b>g</b> (1,000,000,000).</p> <p><b>Range:</b> 32000 bps (32 Kbps) through 10,000,000,000 bps (10 Gbps)</p>
<b>Required Privilege Level</b>	<p>firewall—To view this statement in the configuration.</p> <p>firewall-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183</a></li> <li>• <a href="#">Overview of Policers on page 4096</a></li> </ul>

## burst-size-limit

---

<b>Syntax</b>	<code>burst-size-limit <i>bytes</i>;</code>
<b>Hierarchy Level</b>	[edit <code>firewall policer <i>policer-name</i> if-exceeding</code> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify the maximum allowed burst size to control the amount of traffic bursting.
<b>Options</b>	<p><b><i>bytes</i></b>—Decimal value or a decimal number followed by <b>k</b> (thousand), <b>m</b> (million), or <b>g</b> (giga).</p> <p><b>Range:</b> 1 through 2,147,450,880 bytes (2147 MB)</p>
<b>Required Privilege Level</b>	<p>firewall—To view this statement in the configuration.</p> <p>firewall-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183</a></li> <li>• <a href="#">Overview of Policers on page 4096</a></li> </ul>



## color-aware

---

<b>Syntax</b>	color-aware;
<b>Hierarchy Level</b>	[edit <b>firewall three-color-policer</b> <i>policer-name</i> single-rate], [edit <b>firewall three-color-policer</b> <i>policer-name</i> two-rate]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the way preclassified packets are metered. In color-aware mode, the switch can assign a higher packet-loss priority, but cannot assign a lower packet loss priority (PLP). For example, suppose an upstream device assigns medium-high PLP to a packet because the packet exceeded its committed information rate (CIR). The switch cannot change the PLP to low even if the packet conforms to the configured CIR of the appropriate interface. On the other hand, if an upstream device assigns low PLP to a packet but the packet exceeds the CIR and committed burst size (CBS) of the switch interface, the switch can increase the PLP to medium-high.
<b>Default</b>	If you omit the <b>color-aware</b> statement, the default behavior is color-aware mode.
<b>Required Privilege Level</b>	firewall—To view this statement in the configuration. firewall-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Overview of Policers on page 4096</a></li><li>• <a href="#">Understanding Color-Aware Mode for Single-Rate Tricolor Marking on page 4101</a></li><li>• <a href="#">Understanding Color-Aware Mode for Two-Rate Tricolor Marking on page 4103</a></li><li>• <a href="#">color-blind on page 4217</a></li></ul>



## color-blind


---

<b>Syntax</b>	color-blind;
<b>Hierarchy Level</b>	[edit <a href="#">firewall three-color-policer</a> <i>policer-name</i> single-rate], [edit <a href="#">firewall three-color-policer</a> <i>policer-name</i> two-rate]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the way preclassified packets are metered. In color-blind mode, the switch ignores any preclassification of packets and can assign a higher or lower packet loss priority (PLP). For example, suppose an upstream device assigns medium-high PLP to a packet because the packet exceeded the CIR on the upstream device. The switch can change the PLP to low if the packet conforms to the CIR of the appropriate interface.
<b>Default</b>	If you omit the <b>color-blind</b> statement, the default behavior is color-aware mode.
<b>Required Privilege Level</b>	firewall—To view this statement in the configuration. firewall-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Overview of Policers on page 4096</a></li> <li>• <a href="#">Understanding Color-Blind Mode for Single-Rate Tricolor Marking on page 4100</a></li> <li>• <a href="#">Understanding Color-Blind Mode for Two-Rate Tricolor Marking on page 4103</a></li> <li>• <a href="#">Configuring Color-Blind Egress Policers for Medium-Low PLP on page 4182</a></li> <li>• <a href="#">color-aware on page 4216</a></li> </ul>




## committed-burst-size

---

<b>Syntax</b>	<code>committed-burst-size bytes;</code>
<b>Hierarchy Level</b>	[edit <a href="#">firewall three-color-policer</a> <i>policer-name</i> single-rate], [edit <a href="#">firewall three-color-policer</a> <i>policer-name</i> two-rate]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the maximum number of bytes allowed for incoming traffic to burst above the committed information rate and still be marked with low packet loss priority (green).
	<div> <b>NOTE:</b> When you include the <code>committed-burst-size</code> statement in the configuration, you must also include the <code>committed-information-rate</code> statement at the same hierarchy level.</div>
<b>Options</b>	<b>bytes</b> —Number of bytes. You can specify a value in bytes either as a complete decimal number or as a decimal number followed by the abbreviation <b>k</b> (1000), <b>m</b> (1,000,000), or <b>g</b> (1,000,000,000). <b>Range:</b> 512 bytes through 268435456 bytes (268 MB)
<b>Required Privilege Level</b>	<b>firewall</b> —To view this statement in the configuration. <b>firewall-control</b> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183</a></li><li>• <a href="#">Overview of Policers on page 4096</a></li></ul>




## committed-information-rate

<b>Syntax</b>	<code>committed-information-rate <i>bits-per-second</i>;</code>
<b>Hierarchy Level</b>	[edit <code>firewall three-color-policer <i>policer-name</i> single-rate</code> ], [edit <code>firewall three-color-policer <i>policer-name</i> two-rate</code> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the guaranteed bandwidth under normal line conditions and the average rate up to which packets are marked with low packet loss priority (green).
	<div>  <p><b>NOTE:</b> When you include the <code>committed-information-rate</code> statement in the configuration, you must also include the <code>committed-burst-size</code> statement at the same hierarchy level.</p> </div>
<b>Options</b>	<p><b><i>bits-per-second</i></b>—Number of bits per second. You can specify a value in bits per second either as a complete decimal number or as a decimal number followed by the abbreviation <b>k</b> (1000), <b>m</b> (1,000,000), or <b>g</b> (1,000,000,000).</p> <p><b>Range:</b> 32,000 bps through 10,000,000,000 bps (10 gbps)</p>
<b>Required Privilege Level</b>	<p><code>firewall</code>—To view this statement in the configuration.</p> <p><code>firewall-control</code>—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183</a></li> <li>• <a href="#">Overview of Policers on page 4096</a></li> </ul>



## excess-burst-size

---

<b>Syntax</b>	<code>excess-burst-size bytes;</code>
<b>Hierarchy Level</b>	[edit <a href="#">firewall three-color-policer</a> <i>policer-name</i> single-rate]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the maximum number of bytes allowed for incoming traffic to burst above the committed information rate and still be marked with medium-high packet loss priority (yellow). Packets that exceed the excess burst size (EBS) are marked with high packet loss priority (red).
	<div> <b>NOTE:</b> When you include the <code>excess-burst-size</code> statement in the configuration, you must also include the <code>committed-burst-size</code> and <code>committed-information-rate</code> statements at the same hierarchy level.</div>
<b>Options</b>	<p><b>bytes</b>—Number of bytes. You can specify a value in bytes either as a complete decimal number or as a decimal number followed by the abbreviation <b>k</b> (1000), <b>m</b> (1,000,000), or <b>g</b> (1,000,000,000).</p> <p><b>Range:</b> 512 bytes through 268435456 bytes (268 MB)</p>
<b>Required Privilege Level</b>	<p><b>firewall</b>—To view this statement in the configuration.</p> <p><b>firewall-control</b>—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183</a></li><li>• <a href="#">Overview of Policers on page 4096</a></li></ul>



## filter-specific

---

<b>Syntax</b>	filter-specific;
<b>Hierarchy Level</b>	[edit <a href="#">firewall policer</a> <i>policer-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Configure a policer to be filter-specific, which means that Junos OS creates only one policer instance regardless of how many times the policer is referenced. If you use a filter-specific policer in multiple terms, both of the following are true:</p> <ul style="list-style-type: none"> <li>• Traffic is policed at the aggregate rate. For example, if you create a policer that has a bandwidth limit of 100 Mbps and use the policer in two terms, the total allowed bandwidth for both terms is 100 Mbps—not 100 Mbps for each term.</li> <li>• The implicit counter counts all the packets are that matched by any of the terms. For example, if you reference the same filter-specific policer in term1 and term2, and term1 matches 1000 packets and term2 matches 500 packets, the implicit counter shows 1500 matches for the policer.</li> </ul>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183</a></li> <li>• <a href="#">Overview of Policers on page 4096</a></li> </ul>



## firewall

---

```
Syntax  firewall {  
        family family-name {  
            filter filter-name {  
                interface-specific;  
                term term-name {  
                    from {  
                        match-conditions;  
                    }  
                    then {  
                        action;  
                        action-modifiers;  
                    }  
                }  
            }  
        }  
        policer policer-name {  
            filter-specific;  
            if-exceeding {  
                bandwidth-limit bps;  
                burst-size-limit bytes;  
            }  
            then {  
                policer-action;  
            }  
        }  
        three-color-policer policer-name {  
            action {  
                loss-priority high then discard;  
            }  
            single-rate {  
                (color-aware | color-blind);  
                committed-information-rate bps;  
                committed-burst-size bytes;  
                excess-burst-size bytes;  
            }  
            two-rate {  
                (color-aware | color-blind);  
                committed-information-rate bps;  
                committed-burst-size bytes;  
                peak-information-rate bps;  
                peak-burst-size bytes;  
            }  
        }  
    }
```

Hierarchy Level [\[edit\]](#)

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure firewall filters and policers.

The remaining statements are explained separately.



<b>Required Privilege Level</b>	firewall—To view this statement in the configuration. firewall-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Firewall Filter Match Conditions and Actions on page 4080</a></li> <li>• <a href="#">Configuring Firewall Filters on page 4177</a></li> <li>• <a href="#">Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183</a></li> <li>• <a href="#">Overview of Firewall Filters on page 4071</a></li> </ul>

## if-exceeding

---

<b>Syntax</b>	<pre>if-exceeding {     bandwidth-limit <i>bps</i>;     burst-size-limit <i>bytes</i>; }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">firewall policer</a> <i>policer-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Configure policer rate limits.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	firewall—To view this statement in the configuration. firewall-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183</a></li> <li>• <a href="#">Overview of Policers on page 4096</a></li> </ul>




## loss-priority high then discard (Three-Color Policer)

---

<b>Syntax</b>	loss-priority high then discard;
<b>Hierarchy Level</b>	[edit firewall <b>three-color-policer</b> <i>policer-name</i> <b>action</b> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>For packets with high loss priority, discard the packets. The loss priority setting is not configurable. Include this statement if you do not want the switch to forward packets that have high packet-loss priority.</p> <p>For single-rate three-color policers, Junos OS assigns high loss priority to packets that exceed the committed information rate and the excess burst size.</p> <p>For two-rate three-color policers, Junos OS assigns high loss priority to packets that exceed the peak information rate and the peak burst size.</p>
<b>Required Privilege Level</b>	firewall—To view this statement in the configuration. firewall-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183</a></li><li>• <a href="#">Overview of Policers on page 4096</a></li></ul>




## peak-burst-size

<b>Syntax</b>	<code>peak-burst-size bytes;</code>
<b>Hierarchy Level</b>	[edit <a href="#">firewall three-color-policer</a> <i>policer-name</i> two-rate]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the maximum number of bytes allowed for incoming packets to burst above the peak information rate (PIR) and still be marked with medium-high packet loss priority (yellow). Packets that exceed the peak burst size (PBS) are marked with high packet loss priority (red).
	<div>  <p><b>NOTE:</b> When you include the <code>peak-burst-size</code> statement in the configuration, you must also include the <code>committed-burst-size</code> and <code>peak-information-rate</code> statements at the same hierarchy level.</p> </div>
<b>Options</b>	<p><b>bytes</b>—Number of bytes. You can specify a value in bytes either as a complete decimal number or as a decimal number followed by the abbreviation <b>k</b> (1000), <b>m</b> (1,000,000), or <b>g</b> (1,000,000,000).</p> <p><b>Range:</b> 1500 bytes through 100,000,000,000 bytes (100 GB)</p>
<b>Required Privilege Level</b>	<p><b>firewall</b>—To view this statement in the configuration.</p> <p><b>firewall-control</b>—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183</a></li> <li>• <a href="#">Overview of Policers on page 4096</a></li> </ul>



## peak-information-rate

---

<b>Syntax</b>	<code>peak-information-rate <i>bits-per-second</i>;</code>
<b>Hierarchy Level</b>	[edit <code>firewall three-color-policer <i>policer-name</i> two-rate</code> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the maximum achievable rate. Packets that exceed the committed information rate (CIR) but are below the peak information rate (PIR) are marked with medium-high packet loss priority (yellow). Packets that exceed the PIR are marked with high packet loss priority (red). You can configure a discard action for packets that exceed the PIR.
	<div><p><b>NOTE:</b> When you include the <code>peak-information-rate</code> statement in the configuration, you must also include the <code>committed-information-rate</code> and <code>peak-burst-size</code> statements at the same hierarchy level.</p></div>
<b>Options</b>	<p><b><i>bits-per-second</i></b>—Number of bits per second. You can specify a value in bits per second either as a complete decimal number or as a decimal number followed by the abbreviation <b>k</b> (1000), <b>m</b> (1,000,000), or <b>g</b> (1,000,000,000).</p> <p><b>Range:</b> 32,000 bps through 10,000,000,000 bps (10 gbps)</p>
<b>Required Privilege Level</b>	<p><code>firewall</code>—To view this statement in the configuration.</p> <p><code>firewall-control</code>—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183</a></li><li>• <a href="#">Overview of Policers on page 4096</a></li></ul>



## policer

<b>Syntax</b>	<pre> policer <i>policer-name</i> {   filter-specific;   if-exceeding {     bandwidth-limit <i>bps</i>;     burst-size-limit <i>bytes</i>;   }   then {     <i>policer-action</i>;   } } </pre>
<b>Hierarchy Level</b>	[edit <a href="#">firewall</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Configure policer rate limits and actions. To activate a policer, you must include the <b>policer</b> action modifier in the <b>then</b> statement in a firewall filter term.</p> <p>Each policer that you configure includes an implicit counter that counts the number of packets that exceed the rate limits that are specified for the policer. If you use the same policer in multiple terms—either within the same filter or across filters—the policer's implicit counter is used to count packets that are policed in all of these terms. If you want to obtain separate packet counts for each term, use these approaches:</p> <ul style="list-style-type: none"> <li>• Configure a unique policer for each term.</li> <li>• Configure only one policer, but use a unique, explicit counter in each term.</li> </ul>
<b>Options</b>	<p><b><i>policer-name</i></b>—Name that identifies the policer. The name can contain letters, numbers, hyphens (-), and can be up to 64 characters long.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>firewall—To view this statement in the configuration.</p> <p>firewall-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183</a></li> <li>• <a href="#">Configuring Firewall Filters on page 4177</a></li> <li>• <a href="#">Overview of Policers on page 4096</a></li> </ul>



## single-rate


---

<b>Syntax</b>	<pre>single-rate {   (color-aware   color-blind);   committed-information-rate <i>bps</i>;   committed-burst-size <i>bytes</i>;   excess-burst-size <i>bytes</i>; }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">firewall three-color-policer</a> <i>policer-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Configure a single-rate three-color policer in which marking is based on the committed information rate (CIR), committed burst size (CBS), and excess burst size (EBS).</p> <p>Packets that conform to the CIR or the CBS are assigned low loss priority (green). Packets that exceed the CIR and the CBS but are within the EBS are assigned medium-high loss priority (yellow). Packets that exceed the EBS are assigned high loss priority (red).</p> <p>Green and yellow packets are always forwarded; this action is not configurable. You can configure red packets to be discarded. By default, red packets are forwarded.</p> <p>The remaining statements are explained separately.</p>
<b>Options</b>	<b><i>policer-name</i></b> —Name of the three-color policer. Use this name when you apply the policer to an interface.
<b>Required Privilege Level</b>	<b>firewall</b> —To view this statement in the configuration. <b>firewall-control</b> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183</a></li><li>• <a href="#">Overview of Policers on page 4096</a></li></ul>



## then (Policers)

---

Syntax	then { <i>policer-action</i> ; }
Hierarchy Level	[edit <b>firewall</b> <b>policer</b> <i>policer-name</i> ]
Release Information	Statement introduced in Junos OS Release 11.1 for the QFX Series.
Description	Configure a policer action.
Options	<i>policer-action</i> —Allowed policer actions are <b>discard</b> , <b>loss-priority high</b> , and <b>loss-priority low</b> . <b>discard</b> causes the system to drop traffic that exceeds the rate limits defined by the policer. Use <b>loss-priority high</b> to allow the system to forward matching traffic in some cases.
<div>  <p><b>NOTE:</b> If you specify a policer in an egress firewall filter, the only supported action is <b>discard</b>.</p> </div>	
Required Privilege Level	firewall—To view this statement in the configuration. firewall-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183</a></li> <li>• <a href="#">Configuring Firewall Filters on page 4177</a></li> <li>• <a href="#">Overview of Policers on page 4096</a></li> </ul>



## three-color-policer

---

Syntax	<pre>three-color-policer <i>policer-name</i> {   action {     loss-priority high then discard;   }   single-rate {     (color-aware   color-blind);     committed-information-rate <i>bps</i>;     committed-burst-size <i>bytes</i>;     excess-burst-size <i>bytes</i>;   }   two-rate {     (color-aware   color-blind);     committed-information-rate <i>bps</i>;     committed-burst-size <i>bytes</i>;     peak-information-rate <i>bps</i>;     peak-burst-size <i>bytes</i>;   } }</pre>
Hierarchy Level	[edit <a href="#">firewall</a> ], [edit logical-systems <i>logical-system-name</i> firewall]
Release Information	Statement introduced in Junos OS Release 11.1 for the QFX Series.
Description	Configure a three-color policer.
Options	<p><b><i>policer-name</i></b>—Name of the three-color policer. Use this name when you apply the policer to an interface.</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	firewall—To view this statement in the configuration. firewall-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183</a></li><li>• <a href="#">Overview of Policers on page 4096</a></li></ul>



## two-rate

<b>Syntax</b>	<pre>two-rate {   (color-aware   color-blind);   committed-information-rate <i>bps</i>;   committed-burst-size <i>bytes</i>;   peak-information-rate <i>bps</i>;   peak-burst-size <i>bytes</i>; }</pre>
<b>Hierarchy Level</b>	[edit <b>firewall three-color-policer</b> <i>policer-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Configure a two-rate three-color policer in which marking is based on the committed information rate (CIR), committed burst size (CBS), peak information rate (PIR), and peak burst size (PBS).</p> <p>Packets that conform to the CIR or the CBS are assigned low loss priority (green). Packets that exceed the CIR and the CBS but are within the PIR or the PBS are assigned medium-high loss priority (yellow). Packets that exceed the PIR and the PBS are assigned high loss priority (red).</p> <p>Green and yellow packets are always forwarded; this action is not configurable. You can configure red packets to be discarded. By default, red packets are forwarded.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>firewall—To view this statement in the configuration.</p> <p>firewall-control—To add this statement to the configuration.</p>




## Configuration Statements for Port Security

---


### allowed-mac

---

Syntax	allowed-mac <i>mac-address-list</i>
Hierarchy Level	[edit <a href="#">ethernet-switching-options secure-access-port interface</a> (all   <i>interface-name</i> )]
Release Information	Statement introduced in Junos OS Release 11.1 for the QFX Series.
Description	Specify particular MAC addresses to be added to the MAC address cache.
	<div> <b>NOTE:</b> Although this configuration restricts the addresses that can be added to the MAC address cache, it does not block the switch from receiving Layer 2 control packets—such as Link Layer Discovery Protocol (LLDP) packets—transmitted from MAC addresses that are not specified in the list of allowed MAC addresses. Control packets do not undergo the MAC address check, and they are therefore included in the statistics of packets received, though, they are not forwarded to another destination.</div>
Default	Allowed MAC addresses take precedence over dynamic MAC values. For example, if the <b>mac-limit</b> statement is set to four and three allowed MACs are configured, only one dynamic MAC can be learned on that interface.
Options	<b>mac-address-list</b> —One or more MAC addresses configured as allowed MAC addresses for a specified interface or all interfaces.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Understanding MAC Limiting and MAC Move Limiting for Port Security on page 4119</a></li><li>• <a href="#">Configuring MAC Limiting on page 4188</a></li><li>• <a href="#">Configuring MAC Move Limiting (CLI Procedure) on page 4190</a></li><li>• <a href="#">mac-limit on page 4249</a></li><li>• <a href="#">no-allowed-mac-log on page 4251</a></li></ul>



## arp-inspection

<b>Syntax</b>	(arp-inspection   no-arp-inspection) { forwarding-class (for DHCP Snooping or DAI Packets) <i>class-name</i> ; }
<b>Hierarchy Level</b>	[edit] <a href="#">ethernet-switching-options secure-access-port vlan</a> (all   <i>vlan-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Perform dynamic ARP inspection on all VLANs or on the specified VLAN. <ul style="list-style-type: none"> <li>• <b>arp-inspection</b>—Enable ARP inspection.</li> </ul> <div style="border: 1px solid #ccc; padding: 10px; margin: 10px 0;">  <p><b>NOTE:</b> When ARP inspection is enabled, the switch logs ARP request packets that it rejects.</p> </div> <ul style="list-style-type: none"> <li>• <b>no-arp-inspection</b>—Disable ARP inspection.</li> </ul>
<b>Default</b>	Disabled.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Enabling Dynamic ARP Inspection (CLI Procedure) on page 4197</a></li> <li>• <a href="#">Example: Configuring Basic Port Security Features on page 4136</a><a href="#">Example: Configuring DHCP Snooping, DAI , and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 4155</a></li> <li>• <a href="#">Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 4162</a></li> </ul>



## circuit-id

---

<b>Syntax</b>	<pre>circuit-id {     prefix hostname;     use-interface-description;     use-vlan-id; }</pre>
<b>Hierarchy Level</b>	<pre>[edit ethernet-switching-options secure-access-port vlan (all   <i>vlan-name</i>) dhcp-option82] [edit forwarding-options helpers bootp <i>dhcp-option82</i>] [edit forwarding-options helpers bootp interface <i>interface-name</i> dhcp-option82]</pre>
<b>Release Information</b>	Statement introduced in Junos OS Release 9.3 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	<p>Configure the <b>circuit-id</b> suboption (suboption 1) of DHCP option 82 (the DHCP relay agent information option) in DHCP packets destined for a DHCP server. This suboption identifies the circuit (interface and/or VLAN) on which the DHCP request arrived.</p> <p>The format of the <b>circuit-id</b> information for Gigabit Ethernet interfaces that use VLANs is <b><i>interface-name:vlan-name</i></b> . On a Layer 3 interface, the format is just <b><i>interface-name</i></b> .</p> <p>The remaining statements are explained separately.</p>
<b>Default</b>	If DHCP option 82 is enabled on the switch, the circuit ID is supplied by default in the format <b><i>interface-name:vlan-name</i></b> or, on a Layer 3 interface, just <b><i>interface-name</i></b> .
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 4170</a></li><li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 4174</a></li><li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 4201</a></li><li>• <a href="#">Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 4204</a></li><li>• <a href="#">[edit forwarding-options] Configuration Statement Hierarchy on EX Series Switches</a></li><li>• <a href="#">RFC 3046, DHCP Relay Agent Information Option</a>, at <a href="http://tools.ietf.org/html/rfc3046">http://tools.ietf.org/html/rfc3046</a>.</li></ul>



---

## dhcp-trusted

---

<b>Syntax</b>	(dhcp-trusted   no-dhcp-trusted);
<b>Hierarchy Level</b>	[edit ethernet-switching-options secure-access-port interface (Access Port Security) (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Allow or deny DHCP responses from the specified interfaces (ports) or all interfaces. <ul style="list-style-type: none"><li>• <b>dhcp-trusted</b>—Allow DHCP responses.</li><li>• <b>no-dhcp-trusted</b>—Deny DHCP responses.</li></ul>
<b>Default</b>	Trusted for trunk ports, untrusted for access ports.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Overview of Access Port Protection on page 4105</a></li><li>• <a href="#">Enabling a Trusted Port for DHCP on page 4200</a></li></ul>



## dhcp-option82

<b>Syntax</b>	<pre> dhcp-option82 {   circuit-id {     prefix hostname;     use-interface-description;     use-vlan-id;   }   remote-id {     prefix hostname   mac   none;     use-interface-description;     use-string <i>string</i>;   }   vendor-id &lt;<i>string</i>&gt;; } </pre>
<b>Hierarchy Level</b>	<p>[edit ethernet-switching-options secure-access-port vlan (all   <i>vlan-name</i>)]</p> <p>[edit forwarding-options helpers bootp]</p> <p>[edit forwarding-options helpers bootp interface <i>interface-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>When the switch receives a DHCP request from a DHCP client connected on one of the switch's interfaces, have the switch insert DHCP option 82 (also known as the DHCP relay agent information option) information in the DHCP request packet header before it forwards or relays the request to a DHCP server. The server uses the option 82 information, which provides details about the circuit and host the request came from, in formulating the reply; the server does not, however, make any changes to the option 82 information in the packet header. The switch receives the reply and then removes the DHCP option 82 information before forwarding the reply to the client.</p> <p>The remaining statements are explained separately.</p>
<b>Default</b>	Insertion of DHCP option 82 information is not enabled.
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 4170</a></li> <li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 4174</a></li> <li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 4201</a></li> <li>• <a href="#">Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 4204</a></li> <li>• <a href="#">[edit forwarding-options] Configuration Statement Hierarchy on EX Series Switches</a></li> </ul>



- RFC 3046, *DHCP Relay Agent Information Option*, at <http://tools.ietf.org/html/rfc3046>.

## dhcp-snooping-file

<b>Syntax</b>	<code>dhcp-snooping-file {     location <i>local_pathname</i>   <i>remote_URL</i>;     timeout <i>seconds</i>;     write-interval <i>seconds</i>; }</code>
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options secure-access-port</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Specify a local pathname or remote URL for the DHCP snooping database file to maintain persistence of IP-MAC bindings.  The remaining statements are explained separately.
<b>Default</b>	The IP-MAC bindings in the DHCP snooping database file are not persistent. If the switch is rebooted, the bindings are lost.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Understanding DHCP Snooping for Port Security on page 4110</a></li> </ul>


## dhcp-trusted

<b>Syntax</b>	<code>(dhcp-trusted   no-dhcp-trusted);</code>
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options secure-access-port interface</a> (Access Port Security) (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Allow or deny DHCP responses from the specified interfaces (ports) or all interfaces. <ul style="list-style-type: none"> <li>• <b>dhcp-trusted</b>—Allow DHCP responses.</li> <li>• <b>no-dhcp-trusted</b>—Deny DHCP responses.</li> </ul>
<b>Default</b>	Trusted for trunk ports, untrusted for access ports.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Overview of Access Port Protection on page 4105</a></li> <li>• <a href="#">Enabling a Trusted Port for DHCP on page 4200</a></li> </ul>



## disable-timeout (Port Error Disable)

---

<b>Syntax</b>	disable-timeout <i>timeout</i> ;
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options port-error-disable</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify how long Ethernet switching interfaces remain in a disabled state due to MAC limiting, MAC move limiting, or storm control errors.
	<div><p><b>NOTE:</b> If you modify an existing timeout value, the new timeout value does not affect currently disabled interfaces are configured for automatic recovery. The new timeout value applies only to subsequent port errors. Run the <a href="#">clear ethernet-switching port-error</a> command to restore currently disabled interfaces.</p></div>
<b>Default</b>	The disable timeout statement is not enabled.
<b>Options</b>	<p><b>timeout</b>—Time, in seconds, that an interface remains disabled. The disabled interface automatically returns to service when the specified time expires.</p> <p><b>Range:</b> 10 through 3600 seconds</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding MAC Limiting and MAC Move Limiting for Port Security on page 4119</a></li><li>• <a href="#">Understanding Storm Control on page 4125</a></li><li>• <a href="#">Example: Configuring Storm Control on page 4143</a></li><li>• <a href="#">Configuring Autorecovery for MAC Limited or Storm Control Interfaces (CLI Procedure) on page 4192</a></li><li>• <a href="#">action-shutdown on page 4266</a></li></ul>



## ethernet-switching-options

```
Syntax ethernet-switching-options {
  analyzer {
    name {
      input {
        egress {
          interface (all | interface-name);
        }
        ingress {
          interface (all | interface-name);
          vlan (vlan-id | vlan-name);
        }
      }
      output {
        interface interface-name;
        ip-address ip-address;
        vlan (vlan-id | vlan-name);
      }
    }
  }
  bpdv-block {
    interface (all | [interface-name]);
    disable-timeout timeout;
  }
  dot1q-tunneling {
    ether-type (0x8100 | 0x88a8 | 0x9100)
  }
  interfaces interface-name {
    no-mac-learning;
  }
  mac-table-aging-time seconds {
  }
  port-error-disable {
    disable-timeout timeout;
  }
  secure-access-port {
    dhcp-snooping-file {
      location local_pathname | remote_URL;
      timeout seconds;
      write-interval seconds;
    }
    interface (all | interface-name) {
      allowed-mac {
        mac-address-list;
      }
      (dhcp-trusted | no-dhcp-trusted);
      fcoe-trusted;
      mac-limit limit action action;
      no-allowed-mac-log;
    }
    vlan (all | vlan-name) {
      (arp-inspection | no-arp-inspection) [
        forwarding-class (for DHCP Snooping or DAI Packets) class-name;
      ]
    }
  }
}
```



```

dhcp-option82 {
  circuit-id {
    prefix (Circuit ID for Option 82) hostname;
    use-interface-description;
    use-vlan-id;
  }
  remote-id {
    prefix (Remote ID for Option 82) hostname | mac | none;
    use-interface-description;
    use-string string;
  }
  vendor-id <string>;
}
(examine-dhcp | no-examine-dhcp) {
  forwarding-class (for DHCP Snooping or DAI Packets) class-name;
}
examine-fip {
  examine-vn2vn {
    beacon-period milliseconds;
  }
  fc-map fc-map-value;
}
mac-move-limit limit <fabric-limit limit action action>;
}
}
storm-control {
  interface (all | interface-name) {
    bandwidth bandwidth;
    no-broadcast;
    no-multicast;
    no-unknown-unicast;
  }
}
traceoptions {
  file filename <files number> <no-stamp> <replace> <size size> <world-readable |
no-world-readable>;
  flag flag <disable>;
}
unknown-unicast-forwarding {
  vlan (all | vlan-name) {
    interface interface-name;
  }
}
}
}

```

Hierarchy Level [\[edit\]](#)

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure Ethernet switching options.


The remaining statements are explained separately.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.



- Related Documentation**
- [Understanding Port Mirroring on page 4313](#)
  - [Overview of Access Port Protection on page 4105](#)
  - [Understanding Storm Control on page 4125](#)
  - [Understanding Unknown Unicast Forwarding on page 4126](#)

## examine-dhcp

<b>Syntax</b>	(examine-dhcp   no-examine-dhcp);
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options secure-access-port vlan</a> (all   <i>vlan-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series
<b>Description</b>	<p>Enable DHCP snooping on all VLANs or on the specified VLAN.</p> <ul style="list-style-type: none"> <li>• examine-dhcp—Enable DHCP snooping.</li> </ul> <div style="border: 1px solid #ccc; padding: 10px; margin: 10px 0;">  <p><b>NOTE:</b> When DHCP snooping is enabled, the switch logs DHCPDISCOVER packets that it rejects.</p> </div> <ul style="list-style-type: none"> <li>• no-examine-dhcp—Disable DHCP snooping.</li> </ul>
<b>Default</b>	Disabled.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Basic Port Security Features on page 4136</a></li> <li>• <a href="#">Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 4155</a></li> <li>• <a href="#">Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 4162</a></li> <li>• <a href="#">Enabling DHCP Snooping (CLI Procedure) on page 4194</a></li> </ul>




## examine-fip

---

<b>Syntax</b>	<pre>examine-fip {     examine-vn2vn {         beacon-period <i>milliseconds</i>;     }     fc-map <i>fc-map-value</i>; }</pre>
<b>Hierarchy Level</b>	[edit ethernet-switching-options secure-access-port vlan (all   <i>vlan-name</i> )]
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 10.4 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Statement <b>examine-vn2vn</b> introduced in Junos OS Release 12.2 for the QFX Series.</p>
<b>Description</b>	<p>Enable FIP snooping on a specified VLAN. Ensure that the VLAN is a dedicated FCoE VLAN that transports only FCoE traffic.</p> <p>(QFX Series only) Enable VN_Port to VN_Port (VN2VN_Port) FIP snooping on a specified VLAN. The VLAN must be a dedicated FCoE VLAN that transports only VN2VN_Port traffic. One FCoE VLAN cannot support both VN_Port to VF_Port (VN2VF_Port) FIP snooping and VN2VN_Port FIP snooping. Configure separate, dedicated FCoE VLANs for VN2VN_Port FIP snooping and VN2VN_Port FIP snooping.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">vlan</a></li><li>• <a href="#">Example: Configuring an FCoE Transit Switch</a></li><li>• <a href="#">Configuring VN2VF_Port FIP Snooping on an FCoE Transit Switch on page 4596</a></li></ul>



## fc-map

<b>Syntax</b>	<code>fc-map <i>fc-map-value</i>;</code>
<b>Hierarchy Level</b>	<p>[edit ethernet-switching options secure-access-port vlan (all   <i>vlan-name</i>) <a href="#">examine-fip</a>]</p> <p>For the QFX Series only:</p> <p>[edit <a href="#">fc-fabrics</a> <i>fc-fabric-name</i> <a href="#">protocols fip</a>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 10.4 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>
<b>Description</b>	<p>Set the FCoE mapped address prefix (FC-MAP) value for the FCoE VLAN to match the FC switch (or FCoE forwarder) FC-MAP value for the FC fabric. The FC-MAP value is a unique MAC address prefix an FC switch uses to identify FCoE traffic for a given FC fabric (traffic on a particular FCoE VLAN).</p> <p>You can configure the FC-MAP value or use the default value. The FC switch provides the FC-MAP value to FCoE nodes (ENodes) in the FIP discovery advertisement message. If the EX Series switch or the QFX Series FCoE VLAN FC-MAP value does not match the FC switch FC-MAP value, neither device discovers the FC switch on that VLAN, and the ENodes on that VLAN cannot access the FC switch. The FC switch accepts only FCoE traffic that uses the correct FC-MAP value as part of the VN_Port MAC address.</p> <p>When the QFX Series acts as an FCoE-FC gateway, the FC-MAP value for the gateway and the FCoE devices must match the FC switch FC-MAP value in order to communicate with the FC switch.</p>
	<div>  <p><b>NOTE:</b> Changing the FC-MAP value causes all logins to drop and forces the ENodes to log in again.</p> </div>
<b>Options</b>	<p><b><i>fc-map-value</i></b>—FC-MAP value, hexadecimal value preceded by “0x”.</p> <p><b>Range:</b> 0x0EFC00 through 0x0EFCFF</p> <p><b>Default:</b> 0xEFC00</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">examine-fip on page 4242</a></li> <li>• <a href="#">show fip snooping on page 4770</a></li> <li>• Example: Configuring an FCoE Transit Switch</li> <li>• <a href="#">Configuring VN2VF_Port FIP Snooping on an FCoE Transit Switch on page 4596</a></li> </ul>




## fcoe-trusted

---

<b>Syntax</b>	fcoe-trusted;
<b>Hierarchy Level</b>	[edit ethernet-switching-options secure-access-port interface <i>interface-name</i> ]  For the QFX Series only:  [edit fc-fabrics <i>fc-fabric-name</i> protocols fip]
<b>Release Information</b>	Statement introduced in Junos OS Release 10.4 for EX Series switches. Statement introduced in Junos OS Release 11.1 for the QFX Series. Statement introduced for the FC fabric in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	<p>Configure the specified 10-Gigabit Ethernet interface to trust Fibre Channel over Ethernet (FCoE) traffic. If an interface is connected to another switch such as an FCoE forwarder (FCF) or a transit switch, you can configure the interface as trusted so that the interface forwards FCoE traffic from the switch to the FCoE devices without installing FIP snooping filters.</p> <p>(QFX Series only) Configure the specified local Fibre Channel fabric to trust FCoE traffic on all ports in the fabric. Changing the fabric ports from untrusted to trusted removes any existing FIP snooping filters from the ports. Changing the fabric ports from trusted to untrusted by removing the <b>fcoe-trusted</b> configuration from the fabric forces all of the FCoE sessions on those ports to log out so that when the ENodes and VN_Ports log in again, the switch can build the appropriate FIP snooping filters.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show fip snooping on page 4770</a></li><li>• Example: Configuring an FCoE Transit Switch</li><li>• <a href="#">Configuring VN2VF_Port FIP Snooping on an FCoE Transit Switch on page 4596</a></li></ul>



## forwarding-class (for DHCP Snooping or DAI Packets)

<b>Syntax</b>	forwarding-class class <i>class-name</i> ;
<b>Hierarchy Level</b>	[edit ethernet-switching-options secure-access-port vlan (all   <i>vlan-name</i> ) (examine-dhcp   arp-inspection)]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.2 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Assign a user-defined or a predefined forwarding class to the packets that have been checked for DHCP snooping or dynamic ARP inspection (DAI).
<div>  <p><b>NOTE:</b> To assign a user-defined class, you must first configure the user-defined class by using the forwarding-classes configuration statement at the [edit class-of-service] hierarchy level.</p> </div>	
<b>Default</b>	Disabled.
<b>Options</b>	<i>class-name</i> —Name of the forwarding class. The forwarding class can be one of the predefined forwarding classes (best-effort, assured-forwarding, expedited-forwarding, network-control) or it can be a user-defined forwarding class.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Example: Using CoS Forwarding Classes to Prioritize Snooped Packets in Heavy Network Traffic</li> <li>• Understanding Junos OS CoS Components for EX Series Switches</li> <li>• <a href="#">Understanding DHCP Snooping for Port Security on page 4110</a></li> <li>• <a href="#">Understanding DAI for Port Security on page 4117</a></li> </ul>



## interface (Secure Access Port)

---

<b>Syntax</b>	<pre>interface (all   <i>interface-name</i>) {     <b>allowed-mac</b> <i>mac-address-list</i>;     (<b>dhcp-trusted</b>   <b>no-dhcp-trusted</b>);     <b>mac-limit</b> <i>limit</i> action <i>action</i>;     <b>no-allowed-mac-log</b>;     <b>static-ip</b> <i>ip-address</i> {         <b>vlan</b> <i>vlan-name</i>;         <b>mac</b> <i>mac-address</i>;     } }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options secure-access-port</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Apply port security features to all interfaces or to the specified interface.</p> <p>The remaining statements are explained separately.</p>
<b>Options</b>	<p><b>all</b>—Apply port security features to all interfaces. Does not apply to QFabric systems.</p> <p><b><i>interface-name</i></b>—Apply port security features to the specified interface.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Overview of Access Port Protection on page 4105</a></li><li>• <a href="#">Understanding MAC Limiting and MAC Move Limiting for Port Security on page 4119</a></li><li>• <a href="#">Understanding Trusted and Untrusted Ports on page 4121</a></li><li>• <a href="#">Configuring MAC Limiting on page 4188</a></li><li>• <a href="#">Enabling a Trusted Port for DHCP on page 4200</a></li></ul>



## interface (Unknown Unicast Forwarding)

---

<b>Syntax</b>	<code>interface <i>interface-name</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options unknown-unicast-forwarding</a> <code>vlan</code> (all [ <i>vlan-name</i> ])]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify the interface to which unknown unicast packets are forwarded.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Understanding Unknown Unicast Forwarding on page 4126</a></li> <li>• <a href="#">Configuring Unknown Unicast Forwarding on page 4194</a></li> <li>• <a href="#">show vlans on page 1752</a></li> </ul>

## location

---

<b>Syntax</b>	<code>location <i>local_pathname</i>   <i>remote_URL</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options secure-access-port dhcp-snooping-file</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Specify either a local pathname or a remote URL as the location in which to store the DHCP snooping database.
<b>Options</b>	<p><code><i>local_pathname</i>   <i>remote_URL</i></code> —Location for storing the DHCP snooping database.</p> <ul style="list-style-type: none"> <li>• <code><i>local_pathname</i></code> —Use <code>/path</code> to store the database on a local switch.</li> <li>• <code><i>remote_URL</i></code> —Use <code>ftp://ip-address</code> or <code>ftp://hostname/path</code> to store the database at a remote location.</li> </ul>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.



## mac

---

<b>Syntax</b>	<code>mac mac-address;</code>
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options secure-access-port</a> interface (Access Port Security) (all   <i>interface-name</i> ) static-ip <i>ip-address</i> vlan (DHCP Bindings on Access Ports) <i>vlan-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 on the QFX Series switches.
<b>Description</b>	Specify a media access control (MAC) address (hardware address) for the specified static IP address.
<b>Options</b>	<i>mac-address</i> —Value in hexadecimal format.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.



## mac-limit

<b>Syntax</b>	<code>mac-limit <i>limit</i> {     &lt;action <i>action</i>&gt;; }</code>
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options secure-access-port interface</a> (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify the number of MAC addresses that can be dynamically added to the MAC address cache for this access interface (port) and the action to be taken if the limit is exceeded.
<b>Default</b>	The default action is <b>drop</b> .
<b>Options</b>	<p><i>limit</i>—Maximum number of MAC addresses.</p> <p><i>action action</i>—(Optional) Action to take when the MAC address limit is exceeded:</p> <ul style="list-style-type: none"> <li>• <b>drop</b>—Drop the packet and generate a system log entry. This is the default.</li> <li>• <b>log</b>—Do not drop the packet but generate a system log entry.</li> <li>• <b>none</b>—No action.</li> <li>• <b>shutdown</b>—Disable the interface and generate an alarm. If you configure the switch with the <a href="#">port-error-disable</a> statement, the disabled interface recovers automatically upon expiration of the specified timeout. If this statement is not configured, you can bring up the disabled interfaces by running the <a href="#">clear ethernet-switching port-error</a> command.</li> </ul>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Understanding MAC Limiting and MAC Move Limiting for Port Security on page 4119</a></li> <li>• <a href="#">Configuring MAC Limiting on page 4188</a></li> <li>• <a href="#">allowed-mac on page 4232</a></li> </ul>



## mac-move-limit

---

<b>Syntax</b>	<code>mac-move-limit <i>limit</i> &lt;fabric-limit <i>limit</i>&gt; action <i>action</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options secure-access-port</a> (all   <i>vlan-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Specify the number of times a MAC address can move to a new interface (port) in 1 second and the action to be taken by the switch if the MAC address move limit is exceeded.
<b>Default</b>	The default move limit is unlimited. The default action is <b>drop</b> .
<b>Options</b>	<p><b>fabric-limit</b>—Specify the maximum number of moves in a QFabric system. If you do not specify a fabric limit, the value for <b>mac-move-limit</b> applies to the QFabric system.</p> <p><b>limit</b>—Maximum number of moves to a new interface per second.</p> <p><b>action <i>action</i></b>—(Optional) Action to take when the MAC address move limit is reached:</p> <ul style="list-style-type: none"><li>• <b>drop</b>—Drop the packet and generate an alarm, an SNMP trap, or a system log entry. This is the default.</li><li>• <b>log</b>—Do not drop the packet but generate an alarm, an SNMP trap, or a system log entry.</li><li>• <b>none</b>—No action.</li><li>• <b>shutdown</b>—Disable the interface and generate an alarm. If you have configured the switch with the <b>port-error-disable</b> statement, the disabled interfaces recover automatically upon expiration of the specified disable timeout. If you have not configured the switch for autorecovery from port error disabled conditions, you can bring up the disabled interfaces by running the <b>clear-ethernet-switch-port</b> command.</li></ul>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">mac-limit on page 4249</a></li><li>• <a href="#">Example: Configuring Basic Port Security Features on page 4136</a></li><li>• <a href="#">Configuring MAC Move Limiting (CLI Procedure) on page 4190</a></li><li>• <a href="#">Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces (CLI Procedure)</a></li></ul>



## no-allowed-mac-log

<b>Syntax</b>	no-allowed-mac-log;
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options secure-access-port interface</a> (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify that the switch should not log messages when it receives packets from invalid MAC addresses on an interface that has been configured for allowed MAC addresses.
<b>Default</b>	The switch logs messages when it receives packets from invalid MAC addresses on an interface that has been configured for particular allowed (specific) MAC addresses.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Understanding MAC Limiting and MAC Move Limiting for Port Security on page 4119</a></li> <li>• <a href="#">Configuring MAC Limiting on page 4188</a></li> <li>• <a href="#">allowed-mac on page 4232</a></li> <li>• <a href="#">mac-limit on page 4249</a></li> </ul>

## no-dhcp-trusted

<b>Syntax</b>	(dhcp-trusted   no-dhcp-trusted);
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options secure-access-port interface</a> (Access Port Security) (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Port security features, such as DHCP snooping and dynamic ARP inspection inspect packets only on untrusted interfaces.</p> <p>Allow or deny DHCP responses from the specified interfaces (ports) or all interfaces.</p> <ul style="list-style-type: none"> <li>• <b>dhcp-trusted</b>—Allow DHCP responses.</li> <li>• <b>no-dhcp-trusted</b>—Deny DHCP responses.</li> </ul>
<b>Default</b>	Trusted for trunk ports, untrusted for access ports.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Overview of Access Port Protection on page 4105</a></li> <li>• <a href="#">Enabling a Trusted Port for DHCP on page 4200</a></li> </ul>



## no-gratuitous-arp-request

---

<b>Syntax</b>	no-gratuitous-arp-request;
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> ], [edit <a href="#">interfaces</a> <i>interface-range</i> <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the switch not to respond to gratuitous ARP requests. You can disable responses to gratuitous ARP requests on both Layer 2 Ethernet switching interfaces and routed VLAN interfaces (RVIs).
<b>Default</b>	Gratuitous ARP responses are enabled on all Ethernet switching interfaces and RVIs.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Routed VLAN Interfaces on page 1551</a></li></ul>


## persistent-learning

---

<b>Syntax</b>	persistent-learning;
<b>Hierarchy Level</b>	[edit ethernet-switching-options secure-access-port interface (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.4 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Specify that learned MAC addresses persist on the specified interfaces across restarts of the switch and link-down conditions. This feature is also known as sticky MAC.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Basic Port Security Features on page 4136</a></li><li>• <a href="#">Configuring Persistent MAC Learning (CLI Procedure)</a></li></ul>



## port-error-disable

<b>Syntax</b>	<code>port-error-disable {     disable-timeout <i>timeout</i>; }</code>
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 on the QFX Series.
<b>Description</b>	Disable rather than block an interface when enforcing MAC limiting, MAC move limiting, and storm control, and allow the interface to recover automatically from the error condition after a specified period of time:
	<div>  <p><b>NOTE:</b> The <code>port-error-disable</code> configuration does not apply to preexisting error conditions. It affects only error conditions that are detected after you enable and commit the <code>port-error-disable</code> statement. To clear a preexisting error condition and restore the interface to service, use the <code>clear ethernet-switching port-error</code> command.</p> </div>
	<ul style="list-style-type: none"> <li>If you enable the <code>mac-limit</code> statement with the <code>shutdown</code> option and also enable the <code>port-error-disable</code> statement, the switch disables (rather than shuts down) the interface when the MAC address limit is reached.</li> <li>If you have enabled the <code>mac-move-limit</code> statement with the <code>shutdown</code> option and you enable the <code>port-error-disable</code> statement, the switch disables (rather than shuts down) the interface when the maximum number of moves to a new interface is reached.</li> <li>If you enable the <code>storm-control</code> statement with the <code>action-shutdown</code> option and you also enable <code>port-error-disable</code>, the switch disables (rather than shuts down) the interface when broadcast traffic and unknown unicast traffic exceed the specified levels.</li> </ul>
<b>Default</b>	Not enabled.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><a href="#">Understanding MAC Limiting and MAC Move Limiting for Port Security on page 4119</a></li> <li><a href="#">Understanding Storm Control on page 4125</a></li> <li><a href="#">Example: Configuring Storm Control on page 4143</a></li> <li><a href="#">Configuring Autorecovery for MAC Limited or Storm Control Interfaces (CLI Procedure) on page 4192</a></li> <li><a href="#">action-shutdown on page 4266</a></li> <li><a href="#">disable-timeout on page 4238</a></li> </ul>



- [clear ethernet-switching port-error on page 4290](#)

## prefix (Remote ID for Option 82)

---

<b>Syntax</b>	prefix hostname   mac   none;
<b>Hierarchy Level</b>	[edit ethernet-switching-options secure-access-port vlan (all   <i>vlan-name</i> ) dhcp-option82 remote-id] [edit forwarding-options helpers bootp dhcp-option82 remote-id] [edit forwarding-options helpers bootp interface <i>interface-name</i> dhcp-option82 remote-id]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.3 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure an optional prefix for the remote ID suboption in the DHCP option 82 information that is inserted by the switch into the packet header of a DHCP request before it forwards or relays the request to a DHCP server.
<b>Default</b>	If <b>prefix</b> is not explicitly specified, no prefix is appended to the remote ID.
<b>Options</b>	<b>hostname</b> —Name of the host system (the switch) that is forwarding or relaying the DHCP request from the DHCP client to the DHCP server.  <b>mac</b> —MAC address of the host system (the switch) that is forwarding or relaying the DHCP request from the DHCP client to the DHCP server.  <b>none</b> —No prefix is applied to the remote ID.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 4170</a></li><li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 4174</a></li><li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 4201</a></li><li>• <a href="#">Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 4204</a></li><li>• [edit forwarding-options] Configuration Statement Hierarchy on EX Series Switches</li><li>• RFC 3046, <i>DHCP Relay Agent Information Option</i>, at <a href="http://tools.ietf.org/html/rfc3046">http://tools.ietf.org/html/rfc3046</a>.</li></ul>



## remote-id

<b>Syntax</b>	<pre>remote-id {     prefix hostname   mac   none;     use-interface-description;     use-string string; }</pre>
<b>Hierarchy Level</b>	<p>[edit ethernet-switching-options secure-access-port vlan (all   <i>vlan-name</i>) <b>dhcp-option82</b>]</p> <p>[edit forwarding-options helpers bootp <b>dhcp-option82</b>]</p> <p>[edit forwarding-options helpers bootp interface <i>interface-name</i> <b>dhcp-option82</b>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Insert the <b>remote-id</b> suboption of DHCP option 82 (also known as the DHCP relay agent information option) in DHCP request packet headers before forwarding or relaying requests to a DHCP server. This suboption provides a trusted identifier for the host system that has forwarded or relayed requests to the server.</p> <p>The remaining statements are explained separately.</p>
<b>Default</b>	<p>If <b>remote-id</b> is not explicitly set, no remote ID value is inserted in the DHCP request packet header. If the <b>remote-id</b> option is specified but is not qualified by a keyword, the MAC address of the host device (the switch) is used as the remote ID.</p>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 4170</a></li> <li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 4174</a></li> <li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 4201</a></li> <li>• <a href="#">Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 4204</a></li> <li>• [edit forwarding-options] Configuration Statement Hierarchy on EX Series Switches</li> <li>• RFC 3046, <i>DHCP Relay Agent Information Option</i>, at <a href="http://tools.ietf.org/html/rfc3046">http://tools.ietf.org/html/rfc3046</a>.</li> </ul>



## secure-access-port

```
Syntax  secure-access-port {
    deactivate;
    dhcp-snooping-file {
        location (local_pathname | remote_URL);
        timeout seconds;
        write-interval seconds;
    }
    interface (all | interface-name) {
        allowed-mac mac-address-list;
        (dhcp-trusted | no-dhcp-trusted);
        fcoe-trusted;
        mac-limit limit {
            <action action>;
        }
        no-allowed-mac-log;
        persistent-learning;
        static-ip ip-address {
            vlan vlan-name;
            mac mac-address;
        }
    }
    vlan (all | vlan-name) {
        (arp-inspection | no-arp-inspection) [
            forwarding-class (for DHCP Snooping or DAI Packets) class-name;
        ]
        dhcp-option82 {
            circuit-id {
                prefix (Circuit ID for Option 82) hostname;
                use-interface-description;
                use-vlan-id;
            }
            remote-id {
                prefix (Remote ID for Option 82) hostname | mac | none;
                use-interface-description;
                use-string string;
            }
            vendor-id <string>;
        }
        (examine-dhcp | no-examine-dhcp) {
            forwarding-class (for DHCP Snooping or DAI Packets) class-name;
        }
        examine-fip {
            examine-vn2vn {
                beacon-period milliseconds;
            }
            fc-map fc-map-value;
        }
        mac-move-limit limit action action;
    }
}
```

Hierarchy Level [edit [ethernet-switching-options](#)]



<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure port security features, including MAC limiting and whether interfaces can receive DHCP responses, and apply dynamic ARP inspection, DHCP snooping, DHCP option 82, and MAC move limiting on no VLANs, specific VLANs, or all VLANs.  The remaining statements are explained separately.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Overview of Access Port Protection on page 4105</a></li> <li>• <a href="#">Understanding MAC Limiting and MAC Move Limiting for Port Security on page 4119</a></li> <li>• <a href="#">Understanding Trusted and Untrusted Ports on page 4121</a></li> <li>• <a href="#">Configuring MAC Limiting on page 4188</a></li> <li>• <a href="#">Enabling a Trusted Port for DHCP on page 4200</a></li> </ul>

## static-ip

<b>Syntax</b>	<pre>static-ip <i>ip-address</i>;       mac <i>mac-address</i>;       vlan <i>vlan-name</i>; }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-optionssecure-access-port interface</a> (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 on the QFX Series.
<b>Description</b>	Bind a static IP address to a MAC address in the DHCP snooping database.
<b>Options</b>	<p><i>ip-address</i>—IP address assigned to the device connected on the specified interface.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Static IP Addresses for DHCP Bindings on Access Ports (CLI Procedure) on page 4193</a></li> </ul>



## timeout (DHCP Snooping)

---

<b>Syntax</b>	timeout <i>seconds</i> ;
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options secure-access-port dhcp-snooping-file</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify a timeout value for remote read and write operations. This value determines the amount of time that the switch waits for a remote system to respond when the DHCP snooping database is stored on a remote FTP site.
<b>Default</b>	None
<b>Options</b>	<i>seconds</i> —Value in seconds. <b>Range:</b> 10 through 3600
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding DHCP Snooping for Port Security on page 4110</a></li></ul>



## use-interface-description

<b>Syntax</b>	<code>use-interface-description;</code>
<b>Hierarchy Level</b>	<p>[edit ethernet-switching-options secure-access-port vlan (all   <i>vlan-name</i>) <b>dhcp-option82</b> <b>circuit-id</b>],</p> <p>[edit forwarding-options helpers bootp <b>dhcp-option82</b> <b>circuit-id</b>],</p> <p>[edit forwarding-options helpers bootp interface <i>interface-name</i> <b>dhcp-option82</b> <b>circuit-id</b>]</p> <p>[edit ethernet-switching-options secure-access-port vlan (all   <i>vlan-name</i>) <b>dhcp-option82</b> <b>remote-id</b>]</p> <p>[edit forwarding-options helpers bootp <b>dhcp-option82</b> <b>remote-id</b>]</p> <p>[edit forwarding-options helpers bootp interface <i>interface-name</i> <b>dhcp-option82</b> <b>remote-id</b>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Use the interface description rather than the interface name (the default) in the circuit ID or remote ID value in the DHCP option 82 information.
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 4170</a></li> <li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 4174</a></li> <li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 4201</a></li> <li>• <a href="#">Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 4204</a></li> <li>• <a href="#">[edit forwarding-options] Configuration Statement Hierarchy on EX Series Switches</a></li> <li>• <a href="#">RFC 3046, DHCP Relay Agent Information Option</a>, at <a href="http://tools.ietf.org/html/rfc3046">http://tools.ietf.org/html/rfc3046</a>.</li> </ul>



## use-string

---

<b>Syntax</b>	<code>use-string <i>string</i>;</code>
<b>Hierarchy Level</b>	<code>[edit ethernet-switching-options secure-access-port vlan (all   <i>vlan-name</i>) dhcp-option82 <i>remote-id</i>]</code> <code>[edit forwarding-options helpers bootp dhcp-option82 <i>remote-id</i>]</code> <code>[edit forwarding-options helpers bootp interface <i>interface-name</i> dhcp-option82 <i>remote-id</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 9.3 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Use a string rather than the MAC address of the host system (the default) in the remote ID value in the DHCP option 82 information.
<b>Options</b>	<b><i>string</i></b> —Character string used as the remote ID value.  <b>Range:</b> 1–255 characters
<b>Required Privilege Level</b>	<b>system</b> —To view this statement in the configuration. <b>system-control</b> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 4170</a></li><li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 4174</a></li><li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 4201</a></li><li>• <a href="#">Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 4204</a></li><li>• <a href="#">[edit forwarding-options] Configuration Statement Hierarchy on EX Series Switches</a></li><li>• <a href="#">RFC 3046, DHCP Relay Agent Information Option</a>, at <a href="http://tools.ietf.org/html/rfc3046">http://tools.ietf.org/html/rfc3046</a>.</li></ul>



## use-vlan-id

---

<b>Syntax</b>	use-vlan-id;
<b>Hierarchy Level</b>	[edit forwarding-options helpers bootp dhcp-option82-circuit-id] [edit forwarding-options helpers bootp interface <i>interface-name</i> dhcp-option82-circuit-id]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.3 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Use the VLAN ID rather than the VLAN name (the default) in the circuit ID value in the DHCP option 82 information.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 4170</a></li> <li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 4174</a></li> <li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 4201</a></li> <li>• <a href="#">Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 4204</a></li> <li>• [edit forwarding-options] Configuration Statement Hierarchy on EX Series Switches</li> <li>• RFC 3046, <i>DHCP Relay Agent Information Option</i>, at <a href="http://tools.ietf.org/html/rfc3046">http://tools.ietf.org/html/rfc3046</a>.</li> </ul>



## vendor-id

---

<b>Syntax</b>	<code>vendor-id &lt;string&gt;;</code>
<b>Hierarchy Level</b>	[edit ethernet-switching-options secure-access-port vlan (all   <i>vlan-name</i> ) <a href="#">dhcp-option82</a> ] [edit forwarding-options helpers bootp <a href="#">dhcp-option82</a> ] [edit forwarding-options helpers bootp interface <i>interface-name</i> <a href="#">dhcp-option82</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.3 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Insert a vendor ID in the DHCP option 82 information in a DHCP request packet header before forwarding or relaying the request to a DHCP server.
<b>Default</b>	If <b>vendor-id</b> is not explicitly configured for DHCP option 82, no vendor ID is set.
<b>Options</b>	<b>string</b> —(Optional) A single string that designates the vendor ID.  <b>Range:</b> 1–255 characters  <b>Default:</b> If you specify <b>vendor-id</b> with no <b>string</b> value, the default vendor ID <b>Juniper</b> is configured.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 4170</a></li><li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 4174</a></li><li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 4201</a></li><li>• <a href="#">Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 4204</a></li><li>• <a href="#">[edit forwarding-options] Configuration Statement Hierarchy on EX Series Switches</a></li></ul>



## vlan (Secure Access Port)

```
Syntax  vlan (all | vlan-name) {
    examine-fip {
        examine-vn2vn {
            beacon-period milliseconds;
        }
        fc-map fc-map-value;
    }
    dhcp-option82
    circuit-id {
        prefix (Circuit ID for Option 82) hostname;
        use-interface-description;
        use-vlan-id;
    }
    remote-id {
        prefix (Remote ID for Option 82) hostname | mac | none;
        use-interface-description;
        use-string string;
    }
    vendor-id <string>;
}
(arp-inspection | no-arp-inspection);
circuit-id {
    prefix (Circuit ID for Option 82) hostname;
    use-interface-description;
    use-vlan-id;
}
remote-id {
    prefix (Remote ID for Option 82) hostname | mac | none;
    use-interface-description;
    use-string string;
}
vendor-id <string>;
}
(examine-dhcp | no-examine-dhcp);
mac-move-limit limit action action;
}
```

**Hierarchy Level** [edit [ethernet-switching-options secure-access-port](#)]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Apply DHCP snooping, dynamic ARP inspection (DAI), DHCP option 82, and MAC move limiting.



**TIP:** To display a list of all configured VLANs on the system, including VLANs that are configured but not committed, type ? after vlan or vlans in your configuration mode command line. Note that only one VLAN is displayed for a VLAN range.



The remaining statements are explained separately.

<b>Options</b>	<b>all</b> —Apply DHCP snooping, DAI, DHCP option 82, and MAC move limiting to all VLANs.  <b>vlan-name</b> —Apply DHCP snooping, DAI, DHCP option 82, and MAC move limiting to the specified VLAN.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Overview of Access Port Protection on page 4105</a></li><li>• <a href="#">Understanding MAC Limiting and MAC Move Limiting for Port Security on page 4119</a></li><li>• <a href="#">Understanding Trusted and Untrusted Ports on page 4121</a></li><li>• <a href="#">Configuring MAC Limiting on page 4188</a></li><li>• <a href="#">Enabling a Trusted Port for DHCP on page 4200</a></li></ul>

---

## vlan (Static IP)

---

<b>Syntax</b>	<code>vlan <i>vlan-name</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options secure-access-port interface</a> (all   <i>interface-name</i> ) <a href="#">static-ip ip-address</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series switches.
<b>Description</b>	Associate a static IP address with the specified VLAN.
<b>Options</b>	<b>vlan-name</b> —Name of a VLAN associated with the specified interface.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Static IP Addresses for DHCP Bindings on Access Ports (CLI Procedure) on page 4193</a></li></ul>



---

## write-interval

---

<b>Syntax</b>	<code>write-interval <i>seconds</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options secure-access-port dhcp-snooping-file</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Specify how frequently the switch writes the database entries from memory into the specified DHCP snooping database file.
<b>Default</b>	None
<b>Options</b>	<i>seconds</i> —Value in seconds. <b>Range:</b> 60 through 86400
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding DHCP Snooping for Port Security on page 4110</a></li></ul>



## Configuration Statements for Device Security

---

### action-shutdown

---

<b>Syntax</b>	action-shutdown;
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options storm-control</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Shut down or disable interfaces when the storm control level is exceeded, as follows:</p> <ul style="list-style-type: none"><li>• If you set both the <b>action-shutdown</b> and the <b>port-error-disable</b> statements, the affected interfaces are disabled temporarily and recover automatically when the disable timeout expires.</li><li>• If you set the <b>action-shutdown</b> statement and do not set the <b>port-error-disable</b> statement, the affected interfaces are shut down when the storm control level is exceeded, and they do not recover automatically. You must issue the <b>clear ethernet-switching port-error</b> command to clear the port error and restore the interfaces to service.</li></ul>
<b>Default</b>	The <b>action-shutdown</b> feature is disabled. If the storm control level is exceeded, the switch drops broadcast and unknown unicast messages on the specified interfaces.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding Storm Control on page 4125</a></li><li>• <a href="#">Example: Configuring Storm Control on page 4143</a></li><li>• <a href="#">port-error-disable on page 4253</a></li><li>• <a href="#">disable-timeout on page 4238</a></li><li>• <a href="#">clear ethernet-switching port-error on page 4290</a></li></ul>



## bandwidth

<b>Syntax</b>	<code>bandwidth <i>bandwidth</i>;</code>
<b>Hierarchy Level</b>	[edit <code>ethernet-switching-options storm-control interface</code> (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For interfaces configured for storm control, configure the storm control level as the bandwidth in kilobits per second (Kbps). If the combination of broadcast and unknown unicast traffic exceeds this level, the switch performs the appropriate action.
<b>Default</b>	None.
<b>Options</b>	<b>bandwidth</b> —Broadcast and unknown unicast traffic rate in Kbps. <b>Range:</b> 100 through 10000000 Kbps <b>Default:</b> None



**NOTE:** When you configure storm control bandwidth, the value you configure is rounded off internally to the closest multiple of 64 Kbps, and the rounded-off value represents the bandwidth that is actually enforced. For example, if you configure a bandwidth limit of 150 Kbps, storm control enforces a bandwidth limit of 128 Kbps.



**CAUTION:** Junos OS allows you to configure a storm control value that exceeds the bandwidth of the interface. If you configure an interface with such a value, storm control does not drop broadcast or unknown unicast packets even if they consume all the available bandwidth.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Understanding Storm Control on page 4125</a></li> <li>• <a href="#">Example: Configuring Storm Control on page 4143</a></li> <li>• <a href="#">action-shutdown on page 4266</a></li> <li>• <a href="#">port-error-disable on page 4253</a></li> <li>• <a href="#">disable-timeout on page 4238</a></li> <li>• <a href="#">clear ethernet-switching port-error on page 4290</a></li> </ul>
------------------------------	--



## ethernet-switching-options

---

```
Syntax ethernet-switching-options {
  analyzer {
    name {
      input {
        egress {
          interface (all | interface-name);
        }
        ingress {
          interface (all | interface-name);
          vlan (vlan-id | vlan-name);
        }
      }
      output {
        interface interface-name;
        ip-address ip-address;
        vlan (vlan-id | vlan-name);
      }
    }
  }
  bpdv-block {
    interface (all | [interface-name]);
    disable-timeout timeout;
  }
  dot1q-tunneling {
    ether-type (0x8100 | 0x88a8 | 0x9100)
  }
  interfaces interface-name {
    no-mac-learning;
  }
  mac-table-aging-time seconds {
  }
  port-error-disable {
    disable-timeout timeout;
  }
  secure-access-port {
    dhcp-snooping-file {
      location local_pathname | remote_URL;
      timeout seconds;
      write-interval seconds;
    }
    interface (all | interface-name) {
      allowed-mac {
        mac-address-list;
      }
      (dhcp-trusted | no-dhcp-trusted);
      fcoe-trusted;
      mac-limit limit action action;
      no-allowed-mac-log;
    }
    vlan (all | vlan-name) {
      (arp-inspection | no-arp-inspection) [
        forwarding-class (for DHCP Snooping or DAI Packets) class-name;
      ]
    }
  }
}
```



```

dhcp-option82 {
  circuit-id {
    prefix (Circuit ID for Option 82) hostname;
    use-interface-description;
    use-vlan-id;
  }
  remote-id {
    prefix (Remote ID for Option 82) hostname | mac | none;
    use-interface-description;
    use-string string;
  }
  vendor-id <string>;
}
(examine-dhcp | no-examine-dhcp) {
  forwarding-class (for DHCP Snooping or DAI Packets) class-name;
}
examine-fip {
  examine-vn2vn {
    beacon-period milliseconds;
  }
  fc-map fc-map-value;
}
mac-move-limit limit <fabric-limit limit action action>;
}
}
storm-control {
  interface (all | interface-name) {
    bandwidth bandwidth;
    no-broadcast;
    no-multicast;
    no-unknown-unicast;
  }
}
traceoptions {
  file filename <files number> <no-stamp> <replace> <size size> <world-readable |
no-world-readable>;
  flag flag <disable>;
}
unknown-unicast-forwarding {
  vlan (all | vlan-name) {
    interface interface-name;
  }
}
}
}

```

Hierarchy Level [\[edit\]](#)

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure Ethernet switching options.

The remaining statements are explained separately.

**Required Privilege Level** routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.



- Related Documentation**
- [Understanding Port Mirroring on page 4313](#)
  - [Overview of Access Port Protection on page 4105](#)
  - [Understanding Storm Control on page 4125](#)
  - [Understanding Unknown Unicast Forwarding on page 4126](#)

---

## interface (Storm Control)

---

<b>Syntax</b>	<pre>interface (all   <i>interface-name</i>) {     bandwidth <i>bandwidth</i>;     no-broadcast;     no-multicast;     no-unknown-unicast; }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options storm-control</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Apply storm control to all interfaces or to the specified interface.  The remaining statement is explained separately.
<b>Default</b>	Storm control is disabled.
<b>Options</b>	<b>all</b> —Apply storm control to all interfaces.  <b><i>interface-name</i></b> —Apply storm control to the specified interface.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding Storm Control on page 4125</a></li><li>• <a href="#">Example: Configuring Storm Control on page 4143</a></li></ul>



## no-broadcast

---

<b>Syntax</b>	no-broadcast;
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options storm-control interface</a> (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For interfaces configured for storm control, disable broadcast traffic storm control on the interface.
<b>Default</b>	When storm control is enabled on an interface, it is enabled for both unknown unicast traffic and broadcast traffic.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Understanding Storm Control on page 4125</a></li> <li>• <a href="#">Example: Configuring Storm Control on page 4143</a></li> </ul>

## no-multicast

---

<b>Syntax</b>	no-multicast;
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options storm-control interface</a> (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Disable storm control for all multicast traffic (both registered multicast and unregistered multicast) for the specified interface or for all interfaces.
<b>Default</b>	Storm control is enabled for unknown unicast traffic, multicast traffic, and broadcast traffic.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Understanding Storm Control on page 4125</a></li> <li>• <a href="#">Example: Configuring Storm Control on page 4143</a></li> </ul>



## no-unknown-unicast

---

<b>Syntax</b>	no-unknown-unicast;
<b>Hierarchy Level</b>	[edit <a href="#">ethernet-switching-options storm-control interface</a> (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	For interfaces configured for storm control, disable unknown unicast traffic storm control on the interface.
<b>Default</b>	When storm control is enabled on an interface, it is enabled for both unknown unicast traffic and broadcast traffic.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding Storm Control on page 4125</a></li><li>• <a href="#">Example: Configuring Storm Control on page 4143</a></li></ul>



## storm-control

**Syntax**

```
storm-control {
  action-shutdown;
  interface (all | interface-name) {
    bandwidth bandwidth;
    no-broadcast;
    no-multicast;
    no-unknown-unicast;
  }
}
```

**Hierarchy Level** [edit [ethernet-switching-options](#)]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Apply storm control to all interfaces or to the specified interfaces.

The statements are explained separately.



**NOTE:** The **no-multicast** option is not supported on QFabric systems.

**Default** By default, storm control is enabled on all switch interfaces at a level of 80 percent of the combined broadcast and unknown unicast streams. You can change the storm control level by configuring it as a specific bandwidth value.

When you configure storm control bandwidth on an aggregated Ethernet interface, each member of the aggregated interface is assigned that bandwidth. For example, if you configure 7000000 Kbps on aggregated interface **ae1**, and **ae1** has two members, **xe-2:0/0/0** and **xe-2:0/0/1**, each member is allowed a bandwidth level of 7000000 Kbps. Thus, the storm control bandwidth on **ae1** could be as much as 14000000 Kbps of combined broadcast and unknown unicast traffic.

**Required Privilege Level**

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Understanding Storm Control on page 4125](#)
- [Example: Configuring Storm Control on page 4143](#)
- [port-error-disable on page 4253](#)
- [disable-timeout on page 4238](#)
- [clear ethernet-switching port-error on page 4290](#)







## CHAPTER 48

# Administration

- [Routine Monitoring on page 4275](#)
- [Monitoring Commands on page 4287](#)

### Routine Monitoring

---

- [Monitoring Firewall Filter Traffic on page 4275](#)
- [Monitoring Port Security on page 4277](#)
- [Verifying That Firewall Filters Are Operational on page 4278](#)
- [Verifying That DAI Is Working Correctly on page 4278](#)
- [Verifying That DHCP Snooping Is Working Correctly on page 4279](#)
- [Verifying That MAC Limiting Is Working Correctly on page 4280](#)
- [Verifying That MAC Move Limiting Is Working Correctly on page 4283](#)
- [Verifying That the Port Error Disable Setting Is Working Correctly on page 4284](#)
- [Verifying That a Trusted DHCP Server Is Working Correctly on page 4284](#)
- [Verifying That Three-Color Policers Are Operational on page 4285](#)
- [Verifying That Two-Color Policers Are Operational on page 4286](#)
- [Verifying That Unknown Unicast Packets Are Forwarded to a Trunk Interface on page 4286](#)

### Monitoring Firewall Filter Traffic

You can use operational mode commands to monitor firewall filter traffic.

- [Monitoring Traffic for All Firewall Filters and Policers That Are Configured on page 4275](#)
- [Monitoring Traffic for a Specific Firewall Filter on page 4276](#)
- [Monitoring Traffic for a Specific Policer on page 4276](#)

#### Monitoring Traffic for All Firewall Filters and Policers That Are Configured

**Purpose** Monitor the number of packets and bytes that matched the firewall filters and monitor the number of packets that exceeded policer rate limits:

**Action** Use the **show firewall** operational mode command:

```
user@switch> show firewall
```



```
Filter: egress-vlan-watch-employee
Counters:
Name                               Bytes          Packets
counter-employee-web              3348           27
Filter: ingress-port-limit-tcp-icmp
Counters:
Name                               Bytes          Packets
icmp-counter                      560            10
Policers:
Name                               Packets
icmp-connection-policer          10
tcp-connection-policer           0
Filter: ingress-vlan-rogue-block
Filter: ingress-vlan-limit-guest
```

**Meaning** The **show firewall** command displays the names of all firewall filters, counters, and policers that are configured. For each counter that is specified in a filter configuration, the output field shows the byte count and packet count for the term in which the counter is specified. For each policer that is specified in a filter configuration, the output field shows the packet count for packets that exceed the specified rate limits.

---

#### Monitoring Traffic for a Specific Firewall Filter

**Purpose** Monitor the number of packets and bytes that matched a firewall filter and monitor the number of packets that exceeded policer rate limits.

**Action** Use the **show firewall filter *filter-name*** operational mode command:

```
user@switch> show firewall filter ingress-port-limit-tcp-icmp
Filter: ingress-port-limit-tcp-icmp
Counters:
Name                               Bytes          Packets
icmp-counter                      560            10
```

**Meaning** The **show firewall filter *filter-name*** command limits the display information to the counters and policers that are defined for the specified filter.

---

#### Monitoring Traffic for a Specific Policer

**Purpose** Monitor the number of packets that exceeded the rate limits of a policer:

**Action** Use the **show firewall policer *policer-name*** operational mode command:

```
user@switch> show firewall policer icmp-connection-policer
Filter: ingress-port-limit-tcp-icmp
Policers:
Name                               Packets
icmp-connection-policer           10
```

**Meaning** The **show firewall policer *policer-name*** command displays the number of packets that exceeded the rate limits for the specified policer.



- Related Documentation**
- [Configuring Firewall Filters on page 4177](#)
  - [Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183](#)
  - [Verifying That Firewall Filters Are Operational on page 4278](#)

## Monitoring Port Security

**Purpose** Use the monitoring functionality to view these port security details:

- DHCP snooping database for a VLAN or all VLANs
- ARP inspection details for all interfaces

**Action** To monitor port security in the J-Web interface, select **Monitor > Security > Port Security**.

To monitor and manipulate the DHCP snooping database and ARP inspection statistics in the CLI, enter the following commands:

- **show dhcp snooping binding**
- **clear dhcp snooping binding**—In addition to clearing the whole database, you can clear database entries for specified VLANs or MAC addresses.
- **show arp inspection statistics**
- **clear arp inspection statistics**

**Meaning** The J-Web Port Security Monitoring page comprises two sections:

- **DHCP Snooping**—Displays the DHCP snooping database for all the VLANs for which DHCP snooping is enabled. To view the DHCP snooping database for a specific VLAN, select the specific VLAN from the list.
- **ARP Inspection**—Displays the ARP inspection details for all interfaces. The information includes details of the number of packets that passed ARP inspection and the number of packets that failed the inspection. The pie chart graphically represents these statistics when you select an interface. To view ARP inspection statistics for a specific interface, select the interface from the list.

You have the following options on the page:

- **Clear ALL**—Clears the DHCP snooping database, either for all VLANs if the option **ALL** has been selected in the Select VLANs list or for the specific VLAN that has been selected in that list.
- **Clear**—Deletes a specific IP address from the DHCP snooping database.

To clear ARP statistics on the page, click **Clear All** in the ARP Statistics section.

Use the CLI commands to show and clear DHCP snooping database and ARP inspection statistics details.



- Related Documentation**
- [Configuring Port Security \(CLI Procedure\) on page 4186](#)
  - [Configuring Port Security \(J-Web Procedure\)](#)
  - [Example: Configuring Basic Port Security Features on page 4136](#)

## Verifying That Firewall Filters Are Operational

**Purpose** Verify that firewall filters are working properly after you apply them to ports, VLANs, or Layer 3 interfaces.

**Action** Use the **show firewall** operational mode command to verify that the firewall filters are working properly:

```
user@switch> show firewall
Filter: egress-vlan-watch-employee
Counters:
Name                               Bytes      Packets
counter-employee-web              0           0
Filter: ingress-port-limit-tcp-icmp
Counters:
Name                               Bytes      Packets
icmp-counter                      560        10
Policers:
Name                               Packets
icmp-connection-policer          10
tcp-connection-policer           0
Filter: ingress-vlan-rogue-block
Filter: ingress-vlan-limit-guest
```

**Meaning** The **show firewall** command displays the names of all firewall filters, counters, and policers that are configured. For each counter that is specified in a filter configuration, the output field shows the byte count and packet count for the term in which the counter is specified. In the above example, the **icmp-counter** in the filter **ingress-port-limit-tcp-icmp** shows that the filter matched 10 packets. For each policer that is specified in a filter configuration, the output field shows the packet count for packets that exceed the specified rate limits. The policer **icmp-connection-policer** shows that 10 ICMP packets were policed.

- Related Documentation**
- [Configuring Firewall Filters on page 4177](#)
  - [Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183](#)
  - [Monitoring Firewall Filter Traffic on page 4275](#)

## Verifying That DAI Is Working Correctly

**Purpose** Verify that dynamic ARP inspection (DAI) is working on the switch.

**Action** Send some ARP requests from network devices connected to the switch.

Display the DAI information:

```
user@switch> show arp inspection statistics
```



## ARP inspection statistics:

Interface	Packets received	ARP inspection pass	ARP inspection failed
ge-0/0/1.0	7	5	2
ge-0/0/2.0	10	10	0
ge-0/0/3.0	12	12	0

**Meaning** The sample output shows the number of ARP packets received and inspected per interface, with a listing of how many packets passed and how many failed the inspection on each interface. The switch compares the ARP requests and replies against the entries in the DHCP snooping database. If a MAC address or IP address in the ARP packet does not match a valid entry in the database, the packet is dropped.

- Related Documentation**
- [Enabling Dynamic ARP Inspection \(CLI Procedure\) on page 4197](#)
  - [Enabling Dynamic ARP Inspection \(J-Web Procedure\)](#)
  - [Example: Configuring Basic Port Security Features on page 4136](#)
  - [Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 4155](#)
  - [Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 4162](#)
  - [Monitoring Port Security on page 4277](#)

## Verifying That DHCP Snooping Is Working Correctly

**Purpose** Verify that DHCP snooping is working on the switch and that the DHCP snooping database is correctly populated with both dynamic and static bindings.

**Action** Send some DHCP requests from network devices (here they are DHCP clients) connected to the switch.

Display the DHCP snooping information when the interface on which the DHCP server connects to the switch is trusted. The following output results when requests are sent from the MAC addresses and the server has provided the IP addresses and leases:

```
user@switch> show dhcp snooping binding
```

## DHCP Snooping Information:

MAC address	IP address	Lease (seconds)	Type	VLAN	Interface
00:05:85:3A:82:77	192.0.2.17	600	dynamic	employee	ge-0/0/1.0
00:05:85:3A:82:79	192.0.2.18	653	dynamic	employee	ge-0/0/1.0
00:05:85:3A:82:80	192.0.2.19	720	dynamic	employee	ge-0/0/2.0
00:05:85:3A:82:81	192.0.2.20	932	dynamic	employee	ge-0/0/2.0
00:05:85:3A:82:83	192.0.2.21	1230	dynamic	employee	ge-0/0/2.0
00:05:85:27:32:88	192.0.2.22	–	static	data	ge-0/0/4.0

**Meaning** When the interface on which the DHCP server connects to the switch has been set to trusted, the output (see preceding sample) shows, for each MAC address, the assigned IP address and lease time—that is, the time, in seconds, remaining before the lease



expires. Static IP addresses have no assigned lease time. The statically configured entry never expires.

If the DHCP server had been configured as untrusted, no entries would be added to the DHCP snooping database and nothing would be shown in the output of the **show dhcp snooping binding** command.

#### Related Documentation

- [Enabling DHCP Snooping \(CLI Procedure\) on page 4194](#)
- [Enabling DHCP Snooping \(J-Web Procedure\)](#)
- [Configuring Static IP Addresses for DHCP Bindings on Access Ports \(CLI Procedure\) on page 4193](#)
- [Example: Configuring Basic Port Security Features on page 4136](#)
- [Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 4155](#)
- [Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 4162](#)
- [Monitoring Port Security on page 4277](#)
- [Troubleshooting Port Security](#)

## Verifying That MAC Limiting Is Working Correctly

MAC limiting protects against flooding of the Ethernet switching table by setting a limit on the number of MAC addresses that can be learned on a single Layer 2 access interface (port).

Junos OS provides two MAC limiting methods:

- **Maximum number of MAC addresses**—You configure the maximum number of dynamic MAC addresses allowed per interface. When the limit is exceeded, incoming packets with new MAC addresses can be ignored, dropped, or logged. You can also specify that the interface be shut down or temporarily disabled.
- **Allowed MAC addresses**—You configure specific “allowed” MAC addresses for the access interface. Any MAC address that is not in the list of configured addresses is not learned, and the switch logs an appropriate message. The allowed MAC method binds MAC addresses to a VLAN so that the address is not registered outside the VLAN. If an allowed MAC setting conflicts with a dynamic MAC setting, the allowed MAC setting takes precedence.

This topic includes the following tasks:

1. [Verifying That MAC Limiting for Dynamic MAC Addresses Is Working Correctly on page 4281](#)
2. [Verifying That Allowed MAC Addresses Are Working Correctly on page 4281](#)



3. [Verifying That Interfaces Are Shut Down on page 4282](#)
4. [Customizing the Ethernet Switching Table Display to View Information for a Specific Interface on page 4282](#)

### Verifying That MAC Limiting for Dynamic MAC Addresses Is Working Correctly

**Purpose** Verify that MAC limiting for dynamic MAC addresses is working.

**Action** Display the MAC addresses that have been learned. The following sample output shows the results of sending two packets from hosts connected to **xe-1:0/0/1** and five packets from hosts connected to **xe-1:0/0/2**, with both interfaces configured with a MAC limit of **4** and the action **drop**:

```
user@switch> show ethernet-switching table
Ethernet-switching table: 7 entries, 6 learned
```

VLAN	MAC address	Type	Age	Interfaces
employee-vlan	*	Flood	-	xe-1:0/0/2.0
employee-vlan	00:05:85:3A:82:77	Learn	0	xe-1:0/0/1.0
employee-vlan	00:05:85:3A:82:79	Learn	0	xe-1:0/0/1.0
employee-vlan	00:05:85:3A:82:80	Learn	0	xe-1:0/0/2.0
employee-vlan	00:05:85:3A:82:81	Learn	0	xe-1:0/0/2.0
employee-vlan	00:05:85:3A:82:83	Learn	0	xe-1:0/0/2.0
employee-vlan	00:05:85:3A:82:85	Learn	0	xe-1:0/0/2.0

**Meaning** The output shows that the fifth packet received on the **xe-1:0/0/2** interface was dropped because it exceeded the MAC limit for that interface. The address was not learned, and thus an asterisk (\*) rather than an address appears in the MAC address column in the first line of the sample output.

### Verifying That Allowed MAC Addresses Are Working Correctly

**Purpose** Verify that allowed MAC addresses are working.

**Action** Display the MAC cache information after allowed MAC addresses have been configured on an interface. The following sample shows the MAC cache after four allowed MAC addresses had been configured on interface **xe-1:0/0/2** and a fifth MAC address appeared on the interface.

```
user@switch> show ethernet-switching table
Ethernet-switching table: 5 entries, 4 learned
```

VLAN	MAC address	Type	Age	Interfaces
employee-vlan	00:05:85:3A:82:80	Learn	0	xe-1:0/0/2.0
employee-vlan	00:05:85:3A:82:81	Learn	0	xe-1:0/0/2.0
employee-vlan	00:05:85:3A:82:83	Learn	0	xe-1:0/0/2.0
employee-vlan	00:05:85:3A:82:85	Learn	0	xe-1:0/0/2.0
employee-vlan	*	Flood	-	xe-1:0/0/2.0

**Meaning** Because the fifth address was not allowed it was not learned, and an asterisk (\*) rather than an address appears in the MAC address column in the last line of the sample output.



### Verifying That Interfaces Are Shut Down

**Purpose** Verify that an interface is shut down when the MAC limit is exceeded.

**Action** For more information about interfaces that have been shut down because the MAC limit was exceeded, use the **show ethernet-switching interfaces** command.

```
user@switch> show ethernet-switching interfaces
```

Interface	State	VLAN members	Tag	Tagging	Blocking
bme0.32770	down	mgmt	untagged	unblocked	
xe-0/0/0.0	down	v1	untagged	MAC limit exceeded	
xe-0/0/1.0	up	v1	untagged	unblocked	
xe-0/0/2.0	up	v1	untagged	unblocked	
me0.0	up	mgmt	untagged	unblocked	



**NOTE:** You can configure interfaces to recover automatically when the MAC limit has been exceeded by specifying the **port-error-disable** statement with a **disable timeout** value. The switch automatically restores the disabled interface to service when the disable timeout expires. The **port-error-disable** configuration does not apply to preexisting error conditions—it affects only error conditions that are detected after the **port-error-disable** statement has been enabled and the configuration has been committed. To clear a preexisting error condition and restore the interface to service, use the **clear ethernet-switching port-error** command.

### Customizing the Ethernet Switching Table Display to View Information for a Specific Interface

**Purpose** You can use the **show ethernet-switching table** command to view information for a specific interface.

**Action** For example, to display the MAC addresses that have been learned on the **xe-0/0/2** interface, enter:

```
user@switch> show ethernet-switching table interface xe-0/0/2.0
```

Ethernet-switching table: 1 unicast entries

VLAN	MAC address	Type	Age	Interfaces
v1	*	Flood	-	All-members
v1	00:00:06:00:00:00	Learn	0	xe-0/0/2.0



**Meaning** The MAC limit value for the **xe-0/0/2** interface had been set to **1**, and the output shows that only one MAC address was learned and added to the MAC cache.

- Related Documentation**
- [Configuring MAC Limiting on page 4188](#)
  - [Monitoring Port Security on page 4277](#)
  - [Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\)](#)
  - [Example: Configuring Allowed MAC Addresses to Protect the Switch from DHCP Snooping Database Alteration Attacks on page 4167](#)
  - [Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the DCF from Ethernet Switching Table Overflow Attacks](#)
  - [Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks on page 4145](#)

## Verifying That MAC Move Limiting Is Working Correctly

**Purpose** Verify that MAC move limiting is working on the switch.

**Action** Display the MAC addresses in the Ethernet switching table when MAC move limiting has been configured for a VLAN. The following sample shows the results after two of the hosts on **ge-0/0/2** sent packets after the MAC addresses for those hosts had moved to other interfaces more than five times in 1 second. The VLAN, **employee-vlan**, was set to a MAC move limit of **5** with the action **drop**:

```
user@switch> show ethernet-switching table
```

```
Ethernet-switching table: 7 entries, 4 learned
```

VLAN	MAC address	Type	Age	Interfaces
employee-vlan	00:05:85:3A:82:77	Learn	0	ge-0/0/1.0
employee-vlan	00:05:85:3A:82:79	Learn	0	ge-0/0/1.0
employee-vlan	00:05:85:3A:82:80	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:81	Learn	0	ge-0/0/2.0
employee-vlan	*	Flood	-	ge-0/0/2.0
employee-vlan	*	Flood	-	ge-0/0/2.0

**Meaning** The last two lines of the sample output show that MAC addresses for two hosts on **ge-0/0/2** were not learned, because the hosts had been moved back and forth from the original interfaces more than five times in 1 second.

- Related Documentation**
- [Configuring MAC Move Limiting \(CLI Procedure\) on page 4190](#)
  - [Configuring MAC Move Limiting \(J-Web Procedure\)](#)
  - [Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\)](#)
  - [Example: Configuring Basic Port Security Features on page 4136](#)



- [Monitoring Port Security on page 4277](#)

## Verifying That the Port Error Disable Setting Is Working Correctly

**Purpose** Verify that the port error disable setting is working as expected for MAC limited and storm control interfaces.

**Action** Display information about interfaces:

```
user@switch> show ethernet-switching interfaces
Interface      State    VLAN members      Blocking
xe-2:0/0/0.0   up       T1122              unblocked
xe-2:0/0/1.0   down     default            MAC limit exceeded
xe-2:0/0/2.0   down     default            Storm control in effect
xe-2:0/0/3.0   down     default            unblocked
xe-2:0/0/4.0   down     default            unblocked
xe-2:0/0/5.0   down     default            unblocked
xe-2:0/0/6.0   down     default            unblocked
```

**Meaning** For interfaces disabled by port security features, the sample output from the **show ethernet-switching interfaces** command specifies the reasons that the interfaces are disabled:

- **MAC limit exceeded**—The interface is temporarily disabled because of a [mac-limit](#) error. The disabled interface is automatically restored to service when the [disable-timeout \(Port Error Disable\)](#) expires.
- **MAC move limit exceeded**—The interface is temporarily disabled because of a [mac-move-limit](#) error. The disabled interface is automatically restored to service when the [disable-timeout](#) expires.
- **Storm control in effect**—The interface is temporarily disabled because of a [storm-control](#) error. The disabled interface is automatically restored to service when the [disable-timeout \(Port Error Disable\)](#) expires.

- Related Documentation**
- [Understanding MAC Limiting and MAC Move Limiting for Port Security on page 4119](#)
  - [port-error-disable on page 4253](#)
  - [Configuring Autorecovery for MAC Limited or Storm Control Interfaces \(CLI Procedure\) on page 4192](#)

## Verifying That a Trusted DHCP Server Is Working Correctly

**Purpose** Verify that a DHCP trusted server is working on the switch. See what happens when the DHCP server is trusted and then untrusted.



**Action** Send some DHCP requests from network devices (here they are DHCP clients) connected to the switch.

Display the DHCP snooping information when the interface on which the DHCP server connects to the switch is trusted. The following output results when requests are sent from the MAC addresses and the server has provided the IP addresses and leases:

```
user@switch> show dhcp snooping binding
```

DHCP Snooping Information:

MAC Address	IP Address	Lease	Type	VLAN	Interface
00:05:85:3A:82:77	192.0.2.17	600	dynamic	employee-vlan	ge-0/0/1.0
00:05:85:3A:82:79	192.0.2.18	653	dynamic	employee-vlan	ge-0/0/1.0
00:05:85:3A:82:80	192.0.2.19	720	dynamic	employee-vlan	ge-0/0/2.0
00:05:85:3A:82:81	192.0.2.20	932	dynamic	employee-vlan	ge-0/0/2.0
00:05:85:3A:82:83	192.0.2.21	1230	dynamic	employee-vlan	ge-0/0/2.0
00:05:85:27:32:88	192.0.2.22	3200	dynamic	employee-vlan	ge-0/0/2.0

**Meaning** When the interface on which the DHCP server connects to the switch has been set to trusted, the output (see preceding sample) shows, for each MAC address, the assigned IP address and lease time—that is, the time, in seconds, remaining before the lease expires.

If the DHCP server had been configured as untrusted, no entries would be added to the DHCP snooping database and nothing would be shown in the output of the **show dhcp snooping binding** command.

- Related Documentation**
- [Enabling a Trusted DHCP Server \(CLI Procedure\) on page 4199](#)
  - [Enabling a Trusted Port for DHCP on page 4200](#)
  - [Enabling a Trusted DHCP Server \(J-Web Procedure\)](#)
  - [Example: Configuring Basic Port Security Features on page 4136](#)
  - [Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks on page 4152](#)
  - [Monitoring Port Security on page 4277](#)
  - [Troubleshooting Port Security](#)

## Verifying That Three-Color Policers Are Operational

**Purpose** Verify that three-color policers in firewall filter configurations are working properly.

**Action** Use the following operational mode commands to verify that a three-color policer is working properly:

- **show class-of-service forwarding-table classifiers**
- **show interfaces *interface-name* extensive**
- **show interfaces queue *interface-name***



- Related Documentation**
- [Overview of Policers on page 4096](#)
  - [Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183](#)

## Verifying That Two-Color Policers Are Operational

**Purpose** Verify that two-color policers in firewall filter configurations are working properly.

**Action** Use the **show firewall policer** operational mode command to verify that the policers are working properly:

```
user@switch> show firewall policer
Filter: egress-vlan-watch-employee
Filter: ingress-port-filter
Filter: ingress-port-limit-tcp-icmp
Policies:
Name                                     Packets
icmp-connection-policer                  10
tcp-connection-policer                   539
Filter: ingress-vlan-rogue-block
Filter: ingress-vlan-limit-guest
```

**Meaning** The **show firewall policer** command displays the names of all firewall filters and policers that are configured. For each policer that is specified in a filter configuration, the output field shows the current packet count for all packets that exceed the specified rate limits.

- Related Documentation**
- [Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183](#)
  - [Configuring Firewall Filters on page 4177](#)
  - [Monitoring Firewall Filter Traffic on page 4275](#)

## Verifying That Unknown Unicast Packets Are Forwarded to a Trunk Interface

**Purpose** Verify that a VLAN is forwarding all unknown unicast packets (those with unknown destination MAC addresses) to a single trunk port instead of flooding them out all the ports in the VLAN.

**Action** 1. Display the forwarding interface for unknown unicast packets for a VLAN (here, the VLAN name is **v1**):

```
user@switch> show configuration ethernet-switching-options

unknown-unicast-forwarding {
    vlan v1 {
        interface xe-2:0/0/7.0;
    }
}
```

2. Display the Ethernet switching table:

```
user@switch> show ethernet-switching table vlan v1
Ethernet-switching table: 3 unicast entries
VLAN    MAC address    Type    Age    Interfaces
v1      *              Flood   -      - All-members
v1      00:01:09:00:00:00 Learn      24    xe-2:0/0/7.0
```



v1                      00:11:09:00:01:00 Learn                      37 xe-2:0/0/3.0

**Meaning**    The sample output from the **show configuration ethernet-switching-options** command shows that the unknown unicast forwarding interface for VLAN **v1** is interface **xe-2:0/0/7**. The output of the **show ethernet-switching table** command shows that an unknown unicast packet is received on interface **xe-0/0/3** with the source MAC address (SMAC) of **00:11:09:00:01:00**. This shows that the SMAC of the packet is learned in the normal way (through the interface **xe-0/0/3.0**). The destination MAC address (DMAC) **00:01:09:00:00:00** is learned on interface **xe-0/0/7**.

- Related Documentation**
- [Configuring Unknown Unicast Forwarding on page 4194](#)
  - [Understanding Unknown Unicast Forwarding on page 4126](#)

---

## Monitoring Commands



## clear arp inspection statistics

---

<b>Syntax</b>	clear arp inspection statistics <interface <i>interface</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Clear ARP inspection statistics.
<b>Options</b>	<b>none</b> —Clears ARP statistics on all interfaces.  <b>interface <i>interface-names</i></b> —(Optional) Clear ARP statistics on one or more interfaces.
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show arp inspection statistics on page 4292</a></li><li>• <a href="#">Example: Configuring Basic Port Security Features on page 4136</a></li><li>• <a href="#">Verifying That DAI Is Working Correctly on page 4278</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear arp inspection statistics on page 4288</a>
<b>Output Fields</b>	This command produces no output.

## Sample Output

**clear arp inspection statistics**      user@switch> clear arp inspection statistics



## clear dhcp snooping binding

---

<b>Syntax</b>	clear dhcp snooping binding <mac (all   <i>mac-address</i> )> <vlan (all   <i>vlan-name</i> )> <vlan (all   <i>vlan-name</i> ) mac (all   <i>mac-address</i> )>
<b>Release Information</b>	Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Clear the DHCP snooping database information.
<b>Options</b>	<p><b>mac (all   <i>mac-address</i>)</b>—(Optional) Clear DHCP snooping information for the specified MAC address or all MAC addresses.</p> <p><b>vlan (all   <i>vlan-name</i>)</b>—(Optional) Clear DHCP snooping information for the specified VLAN or all VLANs.</p>
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Basic Port Security Features on page 4136</a></li> <li>• <a href="#">show dhcp snooping binding on page 4293</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">clear dhcp snooping binding on page 4289</a>
<b>Output Fields</b>	This command produces no output.

### Sample Output

```
clear dhcp snooping binding    user@switch> clear dhcp snooping binding
```



## clear ethernet-switching port-error

---

<b>Syntax</b>	clear ethernet-switching port-error <interface <i>interface-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Clear all MAC limiting, MAC move limiting, and storm control errors from all the Ethernet switching interfaces on the switch or from the specified interface, and restore the interfaces or the specified interface to service.
<b>Options</b>	<b>none</b> —Clear all MAC limiting, MAC move limiting, and storm control errors from all the Ethernet switching interfaces on the switch and restore the interfaces to service.  <b>interface <i>interface-name</i></b> —(Optional) Clear all MAC limiting, MAC move limiting, and storm control errors from the specified interface and restore the interface to service.
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring MAC Limiting on page 4188</a></li><li>• <a href="#">Example: Configuring Storm Control on page 4143</a></li><li>• <a href="#">Configuring Port Security (CLI Procedure) on page 4186</a></li><li>• <a href="#">port-error-disable on page 4253</a></li><li>• <a href="#">Configuring Autorecovery for MAC Limited or Storm Control Interfaces (CLI Procedure) on page 4192</a></li></ul>
<b>Output Fields</b>	This command produces no output.



## clear firewall

---

<b>Syntax</b>	<code>clear firewall (all   counter <i>counter-name</i>   filter <i>filter-name</i>)</code>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Clear statistics provided by firewall filters.</p> <p>When you clear the counters of a filter, this not only impacts the counters shown by the CLI, but also the ones tracked by SNMP 2.</p>
<b>Options</b>	<p><b>all</b>—Clear the packet and byte counts for all firewall filter counters and clear the packet counts for all policer counters.</p> <p><b>counter <i>counter-name</i></b>—Clear the packet and byte counts for the specified firewall filter counter.</p> <p><b>filter <i>filter-name</i></b>—Clear the packet and byte counts for the specified firewall filter.</p>
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Verifying That Firewall Filters Are Operational on page 4278</a></li> <li>• <a href="#">Verifying That Two-Color Policers Are Operational on page 4286</a></li> <li>• <a href="#">Overview of Firewall Filters on page 4071</a></li> <li>• <a href="#">Overview of Policers on page 4096</a></li> </ul>

## Sample Output

<b>clear firewall all</b>	<code>user@switch&gt; clear firewall all</code>
<b>clear firewall counter</b>	<code>user@switch&gt; clear firewall counter port-filter-counter</code>
<b>clear firewall filter</b>	<code>user@switch&gt; clear firewall filter ingress-port-filter</code>



## show arp inspection statistics

<b>Syntax</b>	show arp inspection statistics
<b>Release Information</b>	Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Display ARP inspection statistics.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">clear arp inspection statistics on page 4288</a></li> <li>• <a href="#">Example: Configuring Basic Port Security Features on page 4136</a></li> <li>• <a href="#">Verifying That DAI Is Working Correctly on page 4278</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show arp inspection statistics on page 4292</a>
<b>Output Fields</b>	<a href="#">Table 296 on page 4292</a> lists the output fields for the <b>show arp inspection statistics</b> command. Output fields are listed in the approximate order in which they appear.

**Table 296: show arp inspection statistics Output Fields**

Field Name	Field Description	Level of Output
Interface	Interface on which ARP inspection has been applied.	All levels
Packets received	Total number of packets total that underwent ARP inspection.	All levels
ARP inspection pass	Total number of packets that passed ARP inspection.	All levels
ARP inspection failed	Total number of packets that failed ARP inspection.	All levels

## Sample Output

### show arp inspection statistics

```
user@switch> show arp inspection statistics
```

Interface	Packets received	ARP inspection pass	ARP inspection failed
ge-0/0/0	0	0	0
ge-0/0/1	0	0	0
ge-0/0/2	0	0	0
ge-0/0/3	0	0	0
ge-0/0/4	0	0	0
ge-0/0/5	0	0	0
ge-0/0/6	0	0	0
ge-0/0/7	703	701	2



## show dhcp snooping binding

<b>Syntax</b>	<b>show dhcp snooping binding</b> <b>&lt;interface <i>interface-name</i>&gt;</b> <b>&lt;vlan <i>vlan-name</i>&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Display the DHCP snooping database information.
<b>Options</b>	<b>interface <i>interface-name</i></b> —(Optional) Display the DHCP snooping database information for an interface.  <b>vlan <i>vlan-name</i></b> —(Optional) Display the DHCP snooping database information for a VLAN.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">clear dhcp snooping binding</a></li> <li>• <a href="#">Example: Configuring Basic Port Security Features on page 4136</a></li> <li>• <a href="#">Verifying That DHCP Snooping Is Working Correctly on page 4279</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show dhcp snooping binding on page 4294</a>
<b>Output Fields</b>	<a href="#">Table 297 on page 4293</a> lists the output fields for the <b>show dhcp snooping binding</b> command. Output fields are listed in the approximate order in which they appear.

**Table 297: show dhcp snooping binding Output Fields**

Field Name	Field Description	Level of Output
MAC Address	MAC address of the network device; bound to the IP address.	All levels
IP Address	IP address of the network device; bound to the MAC address.	All levels
Lease	Lease granted to the IP address.	All levels
Type	How the MAC address was acquired.	All levels
VLAN	VLAN name of the network device whose MAC address is shown.	All levels
Interface	Interface address (port).	All levels



## Sample Output

`show dhcp snooping  
binding`

`user@switch> show dhcp snooping binding`

DHCP Snooping Information:

MAC Address	IP Address	Lease	Type	VLAN	Interface
00:00:01:00:00:03	192.0.2.0	640	dynamic	guest	ge-0/0/12.0
00:00:01:00:00:04	192.0.2.1	720	dynamic	guest	ge-0/0/12.0
00:00:01:00:00:05	192.0.2.5	800	dynamic	guest	ge-0/0/13.0



## show firewall

<b>Syntax</b>	<pre>show firewall   &lt;counter <i>counter-name</i>&gt;   &lt;filter <i>filter-name</i>&gt;   &lt;log &lt;detail   interface <i>interface-name</i>&gt;&gt;   &lt;terse&gt;</pre>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display statistics about configured firewall filters.
<b>Options</b>	<p><b>counter <i>counter-name</i></b>—(Optional) Display statistics about a particular firewall filter counter.</p> <p><b>filter <i>filter-name</i></b>—(Optional) Display statistics about a particular firewall filter.</p> <p><b>log</b>—(Optional) Display log entries for all firewall filter activity.</p> <p><b>terse</b>—(Optional) Display firewall filter names only.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Verifying That Firewall Filters Are Operational on page 4278</a></li> <li>• <a href="#">Verifying That Two-Color Policers Are Operational on page 4286</a></li> <li>• <a href="#">Overview of Firewall Filters on page 4071</a></li> <li>• <a href="#">Overview of Policers on page 4096</a></li> </ul>
<b>List of Sample Output</b>	<p><a href="#">show firewall on page 4297</a></p> <p><a href="#">show firewall filter <i>filter-name</i> on page 4297</a></p> <p><a href="#">show firewall counter <i>counter-name</i> on page 4297</a></p> <p><a href="#">show firewall log on page 4297</a></p> <p><a href="#">show firewall log detail on page 4297</a></p>
<b>Output Fields</b>	Table 298 on page 4295 lists the output fields for the <b>show firewall</b> command. Output fields are listed in the approximate order in which they appear.

**Table 298: show firewall Output Fields**

Field Name	Field Description	Level of Output
Filter	Name of the filter that is configured at the <code>[edit firewall family <i>family-name</i> filter]</code> hierarchy level.	All levels



Table 298: show firewall Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Counters</b>	Display filter counter information: <ul style="list-style-type: none"> <li>• Name—Name of a filter counter that has been configured with the <b>count</b> firewall filter action modifier.</li> <li>• Bytes—Number of bytes that match the filter term where the <b>count</b> action modifier was specified.</li> <li>• Packets—Number of packets that matched the filter term where the <b>count</b> action modifier was specified.</li> </ul>	All levels
<b>Policers</b>	Display policer information: <ul style="list-style-type: none"> <li>• Name—Name of the policer that is configured at the <b>[edit firewall policer]</b> hierarchy level.</li> <li>• Packets—Number of packets that matched the filter term where the <b>policer</b> action modifier was specified. This is the number of packets that exceeded the rate limits that the policer specifies.</li> </ul>	All levels
<b>Action</b>	Filter action: <ul style="list-style-type: none"> <li>• <b>A</b>—Accept</li> <li>• <b>D</b>—Discard</li> </ul>	All levels
<b>Interface</b>	Interface on which the firewall filter is applied.	All levels
<b>Protocol</b>	Name of the packet protocol.	All levels
<b>Packet Length</b>	Length of the packet.	All levels
<b>Src Addr</b>	Source address of the packet.	All levels
<b>Dest Addr</b>	Destination address of the packet.	All levels



## Sample Output

### show firewall

```

user@switch> show firewall
Filter: egress-vlan-watch-employee
Counters:
Name                                     Bytes      Packets
counter-employee-web                     0           0
Filter: ingress-port-limit-tcp-icmp
Counters:
Name                                     Bytes      Packets
icmp-counter                             560         10
Policers:
Name                                     Packets
icmp-connection-policer                  10
tcp-connection-policer                   0
Filter: ingress-vlan-rogue-block
Filter: ingress-vlan-limit-guest

```

### show firewall filter filter-name

```

user@switch> show firewall filter ingress-port-limit-tcp-icmp
Filter: ingress-port-limit-tcp-icmp
Counters:
Name                                     Bytes      Packets
icmp-counter                             560         10
Policers:
Name                                     Packets
icmp-connection-policer                  10
tcp-connection-policer                   0

```

### show firewall counter counter-name

```

user@switch> show firewall counter icmp-counter
Filter: ingress-port-voip-class-filter
Counters:
Name                                     Bytes      Packets
icmp-counter                             560         10

```

### show firewall log

```

user@switch> show firewall log
Log :

Time      Filter  Action Interface  Protocol  Src Addr
      Dest Addr
08:00:53  pfe      R      ge-1/0/6.0   ICMP      192.168.3.5
          192.168.3.4
08:00:52  pfe      R      ge-1/0/6.0   ICMP      192.168.3.5
          192.168.3.4
08:00:51  pfe      R      ge-1/0/6.0   ICMP      192.168.3.5
          192.168.3.4
08:00:50  pfe      R      ge-1/0/6.0   ICMP      192.168.3.5
          192.168.3.4
08:00:49  pfe      R      ge-1/0/6.0   ICMP      192.168.3.5
          192.168.3.4
08:00:48  pfe      R      ge-1/0/6.0   ICMP      192.168.3.5
          192.168.3.4
08:00:47  pfe      R      ge-1/0/6.0   ICMP      192.168.3.5
          192.168.3.4

```

```

user@switch> show firewall log detail

```



**show firewall log detail**    Log :

```
Time of Log: 2010-10-13 10:37:17 PDT, Filter: f, Filter action: accept, Name of
interface: fxp0.0Name of protocol: TCP, Packet Length: 50824, Source address:
172.17.22.108:829,
Destination address: 192.168.70.66:513
Time of Log: 2010-10-13 10:37:17 PDT, Filter: f, Filter action: accept, Name of
interface: fxp0.0
Name of protocol: TCP, Packet Length: 1020, Source address: 172.17.22.108:829,
Destination address: 192.168.70.66:513
Time of Log: 2010-10-13 10:37:17 PDT, Filter: f, Filter action: accept, Name of
interface: fxp0.0
Name of protocol: TCP, Packet Length: 49245, Source address: 172.17.22.108:829,
Destination address: 192.168.70.66:513
Time of Log: 2010-10-13 10:37:17 PDT, Filter: f, Filter action: accept, Name of
interface: fxp0.0
Name of protocol: TCP, Packet Length: 49245, Source address: 172.17.22.108:829,
Destination address: 192.168.70.66:513
Time of Log: 2010-10-13 10:37:17 PDT, Filter: f, Filter action: accept, Name of
interface: fxp0.0
Name of protocol: TCP, Packet Length: 49245, Source address: 172.17.22.108:829,
Destination address: 192.168.70.66:513
Time of Log: 2010-10-13 10:37:17 PDT, Filter: f, Filter action: accept, Name of
interface: fxp0.0
Name of protocol: TCP, Packet Length: 49245, Source address: 172.17.22.108:829,
Destination address: 192.168.70.66:513
```



## show firewall policer

<b>Syntax</b>	show firewall policer < <i>policer-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display statistics about configured policers.
<b>Options</b>	<p><b>none</b>—Display the count of policed packets for all configured policers.</p> <p><b><i>policer-name</i></b>—(Optional) Display the count of policed packets for the specified policer.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Verifying That Firewall Filters Are Operational on page 4278</a></li> <li>• <a href="#">Verifying That Two-Color Policers Are Operational on page 4286</a></li> <li>• <a href="#">Overview of Firewall Filters on page 4071</a></li> <li>• <a href="#">Overview of Policers on page 4096</a></li> </ul>
<b>List of Sample Output</b>	<p><a href="#">show firewall policer on page 4300</a></p> <p><a href="#">show firewall policer policer-name on page 4300</a></p>
<b>Output Fields</b>	Table 299 on page 4299 lists the output fields for the <b>show firewall policer</b> command. Output fields are listed in the approximate order in which they appear.

**Table 299: show firewall policer Output Fields**

Field Name	Field Description	Level of Output
<b>Filter</b>	Name of the filter that is configured at the <b>[edit firewall family <i>family-name</i> filter]</b> hierarchy level.	All levels
<b>Policers</b>	Display policer information: <ul style="list-style-type: none"> <li>• <b>Filter</b>—Name of filter that specifies the <b>policer</b> action modifier.</li> <li>• <b>Name</b>—Name of policer.</li> <li>• <b>Packets</b>—Number of packets that matched the filter term in which the <b>policer</b> action modifier is specified. This is the number of packets that exceed the rate limits that the policer specifies.</li> </ul>	All levels



## Sample Output

```
show firewall policer      user@switch> show firewall policer
                           Filter: egress-vlan-filter
                           Filter: ingress-port-filter
                           Policers:
                           Name                               Packets
                           icmp-connection-policer             0
                           tcp-connection-policer               0
                           Filter: ingress-vlan-rogue-block
```

```
show firewall policer      user@switch> show firewall policer tcp-connection-policer
policer-name              Filter: ingress-port-filter
                           Policers:
                           Name                               Packets
                           tcp-connection-policer               0
```



## show interfaces filters

<b>Syntax</b>	show interfaces filters <interface-name>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display firewall filters that are configured on each interface in a switch.
<b>Options</b>	<b>none</b> —Display firewall filter information about all interfaces.  <b>interface-name</b> —(Optional) Display firewall filter information about a particular interface.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show firewall on page 4295</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show interfaces filters on page 4302</a> <a href="#">show interfaces filters interface-name on page 4302</a>
<b>Output Fields</b>	Table 300 on page 4301 lists the output fields for the <b>show interfaces filters</b> command. Output fields are listed in the approximate order in which they appear.

Table 300: show interfaces filters Output Fields

Field Name	Field Description	Level of Output
<b>Interface</b>	Name of the physical interface.	All levels
<b>Admin</b>	Interface state: <b>up</b> or <b>down</b> .	All levels
<b>Link</b>	Link state: <b>up</b> or <b>down</b> .	All levels
<b>Proto</b>	Protocol that is configured on the interface.	All levels
<b>Input Filter</b>	Name of the firewall filter to be evaluated when packets are received on the interface.	All levels
<b>Output Filter</b>	Name of the firewall filter to be evaluated when packets are transmitted on the interface.	All levels



## Sample Output

```
show interfaces filters user@switch> show interfaces filters
Interface      Admin Link Proto Input Filter      Output Filter
ge-0/0/6       up    up
ge-0/0/6.0     up    up  eth-switch ingress-port-limit-tcp-icmp
ge-0/0/7       up    down
ge-0/0/8       up    down
ge-0/0/9       up    down
ge-0/0/10      up    down
ge-0/0/10.0    up    down
```

```
show interfaces filters user@switch> show interfaces filters ge-0/0/6
interface-name
Interface      Admin Link Proto Input Filter      Output Filter
ge-0/0/6       up    up
ge-0/0/6.0     up    up  eth-switch ingress-port-limit-tcp-icmp
```



# Troubleshooting

- [Troubleshooting Procedures on page 4303](#)

## Troubleshooting Procedures

---

- [Troubleshooting Firewall Filter Configuration on page 4303](#)
- [Troubleshooting Policer Configuration on page 4308](#)

## Troubleshooting Firewall Filter Configuration

Use the following information to troubleshoot a firewall filter configuration.

- [Firewall Filter Configuration Returns a No Space Available in TCAM Message on page 4303](#)
- [Filter Counts Previously Dropped Packet on page 4305](#)
- [Matching Packets Not Counted on page 4305](#)
- [Counter Reset When Editing Filter on page 4306](#)
- [Cannot Include loss-priority and policer Actions in Same Term on page 4306](#)
- [Cannot Egress Filter Certain Traffic Originating on QFX Switch on page 4306](#)
- [Firewall Filter Match Condition Not Working with Q-in-Q Tunneling on page 4307](#)
- [Egress Firewall Filters with Private VLANs on page 4307](#)
- [Egress Filtering of L2PT Traffic Not Supported on page 4308](#)
- [Cannot Drop BGP Packets in Certain Circumstances on page 4308](#)
- [Invalid Statistics for Policer on page 4308](#)

### Firewall Filter Configuration Returns a No Space Available in TCAM Message

---

**Problem** When a firewall filter configuration exceeds the amount of available Ternary Content Addressable Memory (TCAM) space, the system returns the following **syslogd** message:

```
No space available in tcam.  
Rules for filter filter-name will not be installed.
```

A switch returns this message during the commit operation if the firewall filter that has been applied to a port, VLAN, or Layer 3 interface exceeds the amount of space available in the TCAM table. The filter is not applied, but the commit operation for the firewall filter configuration is completed in the CLI module.



**Solution** When a firewall filter configuration exceeds the amount of available TCAM table space, you must configure a new firewall filter with fewer filter terms so that the space requirements for the filter do not exceed the available space in the TCAM table.

You can perform either of the following procedures to correct the problem:

To delete the filter and its binding and apply the new smaller firewall filter to the same binding:

1. Delete the filter and its binding to ports, VLANs, or Layer 3 interfaces. For example:

```
[edit]
user@switch# delete firewall family ethernet-switching filter ingress-vlan-rogue-block
user@switch# delete vlans employee-vlan description "filter to block rogue devices on
employee-vlan"
user@switch# delete vlans employee-vlan filter input ingress-vlan-rogue-block
```

2. Commit the changes:

```
[edit]
user@switch# commit
```

3. Configure a smaller filter with fewer terms that does not exceed the amount of available TCAM space. For example:

```
[edit]
user@switch# set firewall family ethernet-switching filter new-ingress-vlan-rogue-block ...
```

4. Apply (bind) the new firewall filter to a port, VLAN, or Layer 3 interface. For example:

```
[edit]
user@switch# set vlans employee-vlan description "filter to block rogue devices on
employee-vlan"
user@switch# set vlans employee-vlan filter input new-ingress-vlan-rogue-block
```

5. Commit the changes:

```
[edit]
user@switch# commit
```

To apply a new firewall filter and overwrite the existing binding but not delete the original filter:

1. Configure a firewall filter with fewer terms than the original filter:

```
[edit]
user@switch# set firewall family ethernet-switching filter new-ingress-vlan-rogue-block...
```

2. Apply the firewall filter to the port, VLAN, or Layer 3 interfaces to overwrite the binding of the original filter—for example:

```
[edit]
user@switch# set vlans employee-vlan description "smaller filter to block rogue devices on
employee-vlan"
user@switch# set vlans employee-vlan filter input new-ingress-vlan-rogue-block
```

Because you can apply no more than one firewall filter per VLAN per direction, the binding of the original firewall filter to the VLAN is overwritten with the new firewall filter **new-ingress-vlan-rogue-block**.

3. Commit the changes:

```
[edit]
user@switch# commit
```





**NOTE:** The original filter is not deleted and is still available in the configuration.

### Filter Counts Previously Dropped Packet

**Problem** If you configure two or more filters in the same direction for a physical interface and one of the filters includes a counter, the counter will be incorrect if the following circumstances apply:

- You configure the filter that is applied to packets first to discard certain packets. For example, imagine that you have a VLAN filter that accepts packets sent to 10.10.1.0/24 addresses and implicitly discards packets sent to any other addresses. You apply the filter to the **admin** VLAN in the output direction, and interface xe-0/0/1 is a member of that VLAN.
- You configure a subsequent filter to accept and count packets that are dropped by the first filter. In this example, you have a port filter that accepts and counts packets sent to 192.168.1.0/24 addresses that is also applied to xe-0/0/1 in the output direction.

The egress VLAN filter is applied first and correctly discards packets sent to 192.168.1.0/24 addresses. The egress port filter is applied next and counts the discarded packets as matched packets. The packets are not forwarded, but the counter displayed by the egress port filter is incorrect.

Remember that the order in which filters are applied depends on the direction in which they are applied, as indicated here:

Ingress filters:

1. Port (Layer 2) filter
2. VLAN filter
3. Router (Layer 3) filter

Egress filters:

1. Router (Layer 3) filter
2. VLAN filter
3. Port (Layer 2) filter

**Solution** This is expected behavior.

### Matching Packets Not Counted

**Problem** If you configure two egress filters with counters for a physical interface and a packet matches both of the filters, only one of the counters includes that packet.

For example:



- You configure an egress port filter with a counter for interface xe-0/0/1.
- You configure an egress VLAN filter with a counter for the **adminVLAN**, and interface xe-0/0/1 is a member of that VLAN.
- A packet matches both filters.

In this case, the packet is counted by only one of the counters even though it matched both filters.

**Solution** This is expected behavior.

---

#### Counter Reset When Editing Filter

**Problem** If you edit a firewall filter term, the value of any counter associated with any term in the same filter is set to 0, including the implicit counter for any policer referenced by the filter. Consider the following examples:

- Assume that your filter has **term1**, **term2**, and **term3**, and each term has a counter that has already counted matching packets. If you edit any of the terms in any way, the counters for all the terms are reset to 0.
- Assume that your filter has **term1** and **term2**. Also assume that **term2** has a **policer** action modifier and the implicit counter of the policer has already counted 1000 matching packets. If you edit **term1** or **term2** in any way, the counter for the policer referenced by **term2** is reset to 0.

**Solution** This is expected behavior.

---

#### Cannot Include loss-priority and policer Actions in Same Term

**Problem** You cannot include both of the following actions in the same firewall filter term in a QFX Series switch:

- **loss-priority**
- **policer**

If you do so, you see the following error message when you attempt to commit the configuration: "cannot support policer action if loss-priority is configured."

**Solution** This is expected behavior.

---

#### Cannot Egress Filter Certain Traffic Originating on QFX Switch

**Problem** On a QFX Series switch, you cannot filter certain traffic with a firewall filter applied in the output direction if the traffic originates on the QFX switch. This limitation applies to control traffic for protocols such as ICMP (ping), STP, LACP, and so on.

**Solution** This is expected behavior.



### Firewall Filter Match Condition Not Working with Q-in-Q Tunneling

**Problem** If you create a firewall filter that includes a match condition of **dot1q-tag** or **dot1q-user-priority** and apply the filter on input to a trunk port that participates in a service VLAN, the match condition does not work if the Q-in-Q EtherType is not 0x8100. (When Q-in-Q tunneling is enabled, trunk interfaces are assumed to be part of the service provider or data center network and therefore participate in service VLANs.)

**Solution** This is expected behavior. To set the Q-in-Q EtherType to 0x8100, enter the **set dot1q-tunneling ethertype 0x8100** statement at the **[edit ethernet-switching-options]** hierarchy level. You must also configure the other end of the link to use the same EtherType.

### Egress Firewall Filters with Private VLANs

**Problem** If you apply a firewall filter in the output direction to a primary VLAN, the filter also applies to the secondary VLANs that are members of the primary VLAN when the traffic egresses with the primary VLAN tag or isolated VLAN tag, as listed below:

- Traffic forwarded from a secondary VLAN trunk port to a promiscuous port (trunk or access)
- Traffic forwarded from a secondary VLAN trunk port that carries an isolated VLAN to a PVLAN trunk port.
- Traffic forwarded from a promiscuous port (trunk or access) to a secondary VLAN trunk port
- Traffic forwarded from a PVLAN trunk port. to a secondary VLAN trunk port
- Traffic forwarded from a community port to a promiscuous port (trunk or access)

If you apply a firewall filter in the output direction to a primary VLAN, the filter does *not* apply to traffic that egresses with a community VLAN tag, as listed below:

- Traffic forwarded from a community trunk port to a PVLAN trunk port
- Traffic forwarded from a secondary VLAN trunk port that carries a community VLAN to a PVLAN trunk port
- Traffic forwarded from a promiscuous port (trunk or access) to a community trunk port
- Traffic forwarded from a PVLAN trunk port. to a community trunk port

If you apply a firewall filter in the output direction to a community VLAN, the following behaviors apply:

- The filter is applied to traffic forwarded from a promiscuous port (trunk or access) to a community trunk port (because the traffic egresses with the community VLAN tag).
- The filter is applied to traffic forwarded from a community port to a PVLAN trunk port (because the traffic egresses with the community VLAN tag).



- The filter is *not* applied to traffic forwarded from a community port to a promiscuous port (because the traffic egresses with the primary VLAN tag or untagged).

**Solution** These are expected behaviors. They occur only if you apply a firewall filter to a private VLAN in the output direction and do not occur if you apply a firewall filter to a private VLAN in the input direction.

---

#### Egress Filtering of L2PT Traffic Not Supported

**Problem** Egress filtering of L2PT traffic is not supported on the QFX3500 switch. That is, if you configure L2PT to tunnel a protocol on an interface, you cannot also use a firewall filter to filter traffic for that protocol on that interface in the output direction. If you commit a configuration for this purpose, the firewall filter is not applied to the L2PT-tunneled traffic.

**Solution** This is expected behavior.

---

#### Cannot Drop BGP Packets in Certain Circumstances

**Problem** BGP packets with a time-to-live (TTL) value greater than 1 cannot be discarded using a firewall filter applied to a loopback interface or applied on input to a Layer 3 interface. BGP packets with TTL value of 1 or 0 can be discarded using a firewall filter applied to a loopback interface or applied on input to a Layer 3 interface.

**Solution** This is expected behavior.

---

#### Invalid Statistics for Policer

**Problem** If you apply a single-rate two-color policer in more than 128 terms in a firewall filter, the output of the **show firewall** command displays incorrect data for the policer.

**Solution** This is expected behavior.

**Related Documentation**

- [Configuring Firewall Filters on page 4177](#)
- [Verifying That Firewall Filters Are Operational on page 4278](#)

## Troubleshooting Policer Configuration

- [Incomplete Count of Packet Drops on page 4308](#)
- [Counter Reset When Editing Filter on page 4309](#)
- [Invalid Statistics for Policer on page 4309](#)
- [Egress Policers on QFX3500 Might Allow More Throughput Than is Configured on page 4309](#)

---

#### Incomplete Count of Packet Drops

**Problem** Under certain circumstances, Junos OS might display a misleading number of packets dropped by an ingress policer.



If packets are dropped because of ingress admission control, policer statistics might not show the number of packet drops you would expect by calculating the difference between ingress and egress packet counts. This might happen if you apply an ingress policer to multiple interfaces, and the aggregate ingress rate of those interfaces exceeds the line rate of a common egress interface. In this case, packets might be dropped from the ingress buffer. These drops are not included in the count of packets dropped by the policer, which causes policer statistics to underreport the total number of drops.

**Solution** This is expected behavior.

### Counter Reset When Editing Filter

**Problem** If you edit a firewall filter term, the value of any counter associated with any term in the same filter is set to 0, including the implicit counter for any policer referenced by the filter. Consider the following examples:

- Assume that your filter has **term1**, **term2**, and **term3**, and each term has a counter that has already counted matching packets. If you edit any of the terms in any way, the counters for all the terms are reset to 0.
- Assume that your filter has **term1** and **term2**. Also assume that **term2** has a **policer** action modifier and the implicit counter of the policer has already counted 1000 matching packets. If you edit **term1** or **term2** in any way, the counter for the policer referenced by **term2** is reset to 0.

**Solution** This is expected behavior.

### Invalid Statistics for Policer

**Problem** If you apply a single-rate two-color policer in more than 128 terms in a firewall filter, the output of the **show firewall** command displays incorrect data for the policer.

**Solution** This is expected behavior.

### Egress Policers on QFX3500 Might Allow More Throughput Than is Configured

**Problem** If you configure a policer to rate-limit throughput and apply it on egress to multiple interfaces on a QFX3500 switch or node, the measured aggregate policed rate might be twice the configured rate, depending on which interfaces you apply the policer to. This occurs if you apply a policer to multiple interfaces and *both* of the following are true:

- There is at least one policed interface in the range xe-0/0/0 to xe-0/0/23 or the range xe-0/1/1 to xe-0/1/7
- There is at least one policed interface in the range xe-0/0/24 to xe-0/0/47 or the range xe-0/1/8 to xe-0/1/15

For example, if you configure a policer to rate-limit at 1 Gbps and apply the policer (by using a firewall filter) to xe-0/0/0 and xe-0/0/24 in the output direction, each interface is rate-limited at 1 Gbps, for a total allowed throughput of 2 Gbps. The same behavior



occurs if you apply the policer to xe-0/1/1 and xe-0/0/24—each interface is rate-limited at 1 Gbps.

If you apply the same policer on egress to multiple interfaces in these groups, each group is rate-limited at 1 Gbps. For example, if you apply the policer to xe-0/0/0 through xe-0/0/4 (five interfaces) and xe-0/0/24 through xe-0/0/33 (ten interfaces), each group is rate-limited at 1 Gbps, for a total allowed throughput of 2 Gbps.

Here is another example: If you apply the policer to xe-0/0/0 through xe-0/0/4 and xe-0/1/1 through xe-0/1/5 (a total of ten interfaces), that group is rate-limited at 1 Gbps in aggregate. If you also apply the policer to xe-0/0/24, that one interface is rate-limited at 1 Gbps while the other ten are still rate-limited at 1 Gbps in aggregate.

Interfaces xe-0/1/1 through xe-0/1/15 are physically located on the QSFP+ uplink ports, according to the following scheme:

- xe-0/1/1 through xe-0/1/3 are on Q0.
- xe-0/1/4 through xe-0/1/7 are on Q1.
- xe-0/1/8 through xe-0/1/11 are on Q2.
- xe-0/1/12 through xe-0/1/15 are on Q3.

This behavior occurs only if the policer is applied in the output direction. If you configure a policer as described above but apply it in the input direction, the total allowed throughput for all interfaces is 1 Gbps.

**Solution** This is expected behavior.



## PART 16

# Services

- [Overview on page 4313](#)
- [Configuration on page 4319](#)
- [Administration on page 4371](#)
- [Troubleshooting on page 4373](#)







## CHAPTER 50

# Overview

- [Port Mirroring on page 4313](#)
- [DHCP Relay on page 4317](#)

## Port Mirroring

---

- [Understanding Port Mirroring on page 4313](#)

### Understanding Port Mirroring

- [Port Mirroring Overview on page 4313](#)
- [Port-Mirroring Terminology on page 4314](#)
- [Port Mirroring Constraints and Limitations on page 4315](#)

#### Port Mirroring Overview

---

Port mirroring copies packets entering or exiting a port or entering a VLAN and sends the copies to a local interface for local monitoring or to a VLAN for remote monitoring. Use port mirroring to send traffic to applications that analyze traffic for purposes such as monitoring compliance, enforcing policies, detecting intrusions, monitoring and predicting traffic patterns, correlating events, and so on.

Port mirroring is needed for traffic analysis on a switch because a switch normally sends packets only to the port to which the destination device is connected. You configure port mirroring on the switch to send copies of unicast traffic to a local interface or a VLAN and run an analyzer application on a device connected to the interface or VLAN. You configure port mirroring by using the **analyzer** statement.

Keep performance in mind when configuring port mirroring. For example, If you mirror traffic from multiple ports, the mirrored traffic may exceed the capacity of the output interface. We recommend that you limit the amount of copied traffic by selecting specific interfaces instead of using the **all** keyword. You can also limit the amount of mirrored traffic by using a firewall filter. Mirroring only the necessary packets reduces the possibility of a performance impact.

You can use port mirroring to copy any of the following:

- All packets entering or exiting an interface (in any combination)—For example, you can send copies of the packets entering some interfaces and the packets exiting other



interfaces to the same local interface or VLAN. If you configure port mirroring to copy packets exiting an interface, traffic that originates on that switch or Node device (in a QFabric system) is not copied when it egresses. Only switched traffic is copied on egress. (See the limitation on egress mirroring below.)

- All packets entering a VLAN—You cannot use port mirroring to copy packets exiting a VLAN.
- Firewall-filtered sample—Sample of packets entering a port or VLAN. Configure a firewall filter to select certain packets for mirroring.



**NOTE:** Firewall filters are not supported on egress ports; therefore, you cannot specify policy-based sampling of packets exiting an interface.

### Port-Mirroring Terminology

Table 301 on page 4314 lists the terms used in the documentation about port mirroring and provides definitions.

**Table 301: Port Mirroring Terms and Definitions**

Term	Description
Analyzer	Port-mirroring configuration. The analyzer includes a name, source interfaces or source VLAN, and a destination for mirrored packets (either a local access interface or a VLAN).
Output interface (also known as monitor interface)	<p>Access interface to which packet copies are sent and to which a device running an analyzer application is connected.</p> <p>The following limitations apply to an output interface:</p> <ul style="list-style-type: none"> <li>• Cannot also be a source port.</li> <li>• Cannot be used for switching.</li> <li>• Cannot be an aggregated Ethernet interface (LAG).</li> <li>• Does not participate in Layer 2 protocols, such as Spanning Tree Protocol (STP).</li> <li>• Loses any existing VLAN associations when you configure it as an analyzer output interface.</li> </ul> <p>If the capacity of the output interface is insufficient to handle the traffic from the source ports, overflow packets are dropped.</p>
Output IP address	<p>IP address of the device running an analyzer application. The device can be on a remote network. When you use this feature, the mirrored packets are GRE-encapsulated. The analyzer device must be able to de-encapsulate GRE-encapsulated packets, or the GRE-encapsulated packets must be de-encapsulated before reaching the analyzer device. (You can use a network sniffer to de-encapsulate the packets.)</p> <ul style="list-style-type: none"> <li>• An output IP address cannot be in the same subnetwork as any of the switch's management interfaces.</li> <li>• If you create virtual routing instances and also create an analyzer configuration that includes an output IP address, the output address belongs to the default virtual routing instance (inet.0 routing table).</li> </ul>



Table 301: Port Mirroring Terms and Definitions (*continued*)

Output VLAN (also known as monitor or analyzer VLAN)	<p>VLAN to which copies are sent and to which a device running an analyzer application is connected. The analyzer VLAN can span multiple switches.</p> <p>The following limitations apply to an output VLAN:</p> <ul style="list-style-type: none"> <li>• Cannot be a private VLAN or VLAN range.</li> <li>• Cannot be shared by multiple <b>analyzer</b> statements.</li> <li>• An output VLAN interface cannot be a member of any other VLAN.</li> <li>• An output VLAN interface cannot be an aggregated Ethernet interface (LAG).</li> <li>• On the source (monitored) switch, only one interface can be a member of the analyzer VLAN.</li> </ul>
Input interface (also known as mirrored or monitored interface)	Interface that provides traffic to be mirrored. This traffic can be entering or exiting the interface. (Ingress or egress traffic can be mirrored.) An input interface cannot also be an output interface for an analyzer.
Monitoring station	Computer running an analyzer application.
Remote port mirroring	Flooding of packet copies (mirrored packets) to an analyzer VLAN that you create specifically for the purpose of receiving mirror traffic instead of sending it to an access interface.
Policy-based mirroring	Mirroring of packets that match the match a firewall filter term. The action <b>analyzer analyzer-name</b> is used in the firewall filter to send the packets to the analyzer.

### Port Mirroring Constraints and Limitations

- [Local and Remote Port Mirroring on page 4315](#)
- [Remote Port Mirroring Only on page 4316](#)

#### Local and Remote Port Mirroring

The following constraints and limitations apply to local and remote port mirroring with the QFX Series:

- You can create a total of four port-mirroring configurations on the QFX Series (standalone switches and QFabric systems), subject to the following limits:
  - There can be no more than two configurations that mirror ingress traffic.
  - There can be no more than two configurations that mirror egress traffic.
- You can configure no more than one type of output in one port-mirroring configuration. That is, you can use no more than one of the following to complete a **set analyzer name output** statement:
  - **interface**
  - **ip-address**
  - **vlan**
- If you configure Junos OS to mirror egress packets, do not configure more than 2000 VLANs on a QFX3500 device or QFabric system. If you do so, some VLAN packets



might contain incorrect VLAN IDs. This applies to any VLAN packets—not only the mirrored copies.

- The **ratio** and **loss-priority** options are not supported.
- Packets with physical layer errors are filtered out and are not sent to the output port or VLAN.
- If you use sFlow monitoring to sample traffic, it does not sample the mirror copies when they exit from the output interface.
- You cannot mirror packets exiting or entering the following ports:
  - Dedicated Virtual Chassis interfaces
  - Management interfaces (me0 or vme0)
  - Fibre Channel interfaces
  - Routed VLAN interfaces
- Do not include an 802.1Q subinterface that has a unit number other than 0 in a port mirroring configuration. Port mirroring does not work with subinterfaces if their unit number is not 0. (You configure 802.1Q subinterfaces using the **vlan-tagging** statement.)
- When packet copies are sent out the output interface, they are not modified for any changes that are normally applied on egress, such as CoS rewriting.
- An interface can be the input interface for only one mirroring configuration. Do not use the same interface as the input interface for multiple mirroring configurations.
- (QFabric systems only) If you configure a QFabric analyzer to mirror egress traffic and the input and output interfaces are on different Node devices, the mirrored copies have incorrect VLAN IDs. This limitation does not apply if you configure a QFabric analyzer to mirror egress traffic and the input and output interfaces are on the *same* Node device. In this case the mirrored copies have the correct VLAN IDs (as long as you do not configure more than 2000 VLANs on the QFabric system).

#### ***Remote Port Mirroring Only***

The following constraints and limitations apply to remote port mirroring with the QFX Series:

- If you configure an output IP address, the address cannot be in the same subnetwork as any of the switch's management interfaces.
- If you create virtual routing instances and also create an analyzer configuration that includes an output IP address, the output address belongs to the default virtual routing instance (inet.0 routing table).
- An output VLAN cannot be a private VLAN or VLAN range.
- An output VLAN cannot be shared by multiple **analyzer** statements.
- An output VLAN interface cannot be a member of any other VLAN.



- An output VLAN interface cannot be an aggregated Ethernet interface.
- On the source (monitored) switch, only one interface can be a member of the analyzer VLAN.

**Related  
Documentation**

- [Configuring Port Mirroring on page 4328](#)
- [Example: Configuring Port Mirroring for Local Analysis on page 4319](#)
- [Example: Configuring Port Mirroring for Remote Analysis on page 4324](#)
- [Troubleshooting Port Mirroring on page 4373](#)

## DHCP Relay

- [DHCP and BOOTP Relay Overview on page 4317](#)

### DHCP and BOOTP Relay Overview

You can configure a Juniper Networks switch to act as a Dynamic Host Configuration Protocol (DHCP) or Bootstrap Protocol (BOOTP) relay agent. This means that if the switch receives a broadcast DHCP or BOOTP request from a locally attached host (client), it relays the message to a specified DHCP or BOOTP server. You should configure the switch to be a DHCP/BOOTP relay agent if you have locally attached hosts and a distant DHCP or BOOTP server.

If you configure a switch to be a DHCP relay agent, you can also enable smart DHCP relay, which enables you to configure alternative gateway addresses for a DHCP server so that if the server fails to reply to the requests sent to the primary gateway address, the switch can resend the requests to the alternative gateway addresses. To use this feature, you must configure a routed VLAN interface or Layer 3 subinterface with multiple IP addresses and configure that interface to be a relay agent.



**NOTE:** Because DHCP and BOOTP messages are broadcast and are not directed to a specific server, switch, or router, Juniper switches cannot function as both a DHCP server and a DHCP/BOOTP relay agent at the same time. The Junos operating system (Junos OS) generates a commit error if both options are configured at the same time, and the commit operation does not succeed until one of the options is removed.

**Related  
Documentation**

- [Configuring DHCP and BOOTP Relay on page 4331](#)
- [bootp on page 4364](#)







## CHAPTER 51

# Configuration

- [Configuration Examples on page 4319](#)
- [Configuration Tasks on page 4328](#)
- [Configuration Statements for Port Mirroring on page 4334](#)
- [Configuration Statements for Encryption on page 4344](#)
- [Configuration Statements for DHCP Relay on page 4363](#)

### Configuration Examples

---

- [Example: Configuring Port Mirroring for Local Analysis on page 4319](#)
- [Example: Configuring Port Mirroring for Remote Analysis on page 4324](#)

#### Example: Configuring Port Mirroring for Local Analysis

Use port mirroring to send traffic to applications that analyze traffic for purposes such as monitoring compliance, enforcing policies, detecting intrusions, monitoring and predicting traffic patterns, correlating events, and so on. Port mirroring copies packets entering or exiting an interface or entering a VLAN and sends the copies to a local interface for local monitoring.

This example describes how to configure port mirroring to copy traffic sent by employee computers to a switch to an access interface on the same switch.

- [Requirements on page 4319](#)
- [Overview and Topology on page 4320](#)
- [Mirroring All Employee Traffic for Local Analysis on page 4320](#)
- [Mirroring Employee-to-Web Traffic for Local Analysis on page 4321](#)
- [Verification on page 4323](#)

#### Requirements

---

This example uses the following hardware and software components:

- Junos OS Release 11.1
- A switch



## Overview and Topology

This topic includes two related examples that describe how to mirror traffic entering interfaces on the switch to an access interface on the same switch. The first example shows how to mirror all traffic sent by employee computers to the switch. The second example includes a filter to mirror only the employee traffic going to the Web.


In this example, **xe-0/0/0** and **xe-0/0/6** serve as connections for employee computers. Interface **xe-0/0/47** is connected to a device running an analyzer application.



**NOTE:** Multiple ports mirrored to one interface can cause buffer overflow and dropped packets.

Figure 161 on page 4320 shows the network topology for this example.

Figure 161: Network Topology for Local Port Mirroring Example

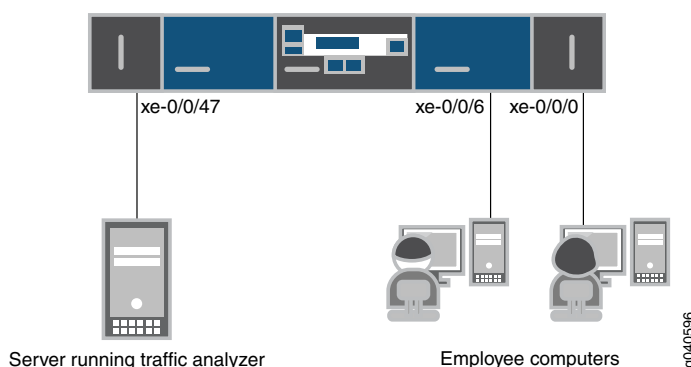

## Mirroring All Employee Traffic for Local Analysis

To configure port mirroring for all traffic sent by employee computers for local analysis, perform the tasks explained in this section.

### CLI Quick Configuration

To quickly configure local port mirroring for ingress traffic to the two ports connected to employee computers, copy the following commands and paste them into a switch terminal window:

```
[edit]
set interfaces xe-0/0/0 unit 0 family ethernet-switching
set interfaces xe-0/0/6 unit 0 family ethernet-switching
set interfaces xe-0/0/47 unit 0 family ethernet-switching
set ethernet-switching options analyzer employee-monitor input ingress interface xe-0/0/0.0
set ethernet-switching options analyzer employee-monitor input ingress interface xe-0/0/6.0
set ethernet-switching options analyzer employee-monitor output interface xe-0/0/47.0
```

### Step-by-Step Procedure

To configure an analyzer called **employee-monitor** and specify the input (source) interfaces and the output interface:

1. Configure the interfaces connected to employee computers as input interfaces for the port-mirror analyzer **employee-monitor**:



```
[edit ethernet-switching-options]
user@switch# set analyzer employee-monitor input ingress interface xe-0/0/0.0
user@switch# set analyzer employee-monitor input ingress interface xe-0/0/6.0
2. Configure the output analyzer interface for the employee-monitor analyzer. This will
be the destination interface for the mirrored packets:

[edit ethernet-switching-options]
user@switch# set analyzer employee-monitor output interface xe-0/0/47.0
```

**Results** Check the results of the configuration:

```
[edit]
user@switch# show ethernet-switching-options
analyzer employee-monitor {
  input {
    ingress {
      interface xe-0/0/0.0;
      interface xe-0/0/6.0;
    }
  }
  output {
    interface {
      xe-0/0/47.0;
    }
  }
}
```

### Mirroring Employee-to-Web Traffic for Local Analysis

To mirror only traffic sent by employees to the Web for local analysis, perform the tasks explained in this section.

#### CLI Quick Configuration

To quickly configure local port mirroring of traffic from employee computers that is destined for the Web, copy the following commands and paste them into a switch terminal window:

```
[edit]
set ethernet-switching-options analyzer employee-web-monitor output interface xe-0/0/47.0
set firewall family ethernet-switching filter watch-employee term employee-to-corp from
destination-address 192.0.2.16/28
set firewall family ethernet-switching filter watch-employee term employee-to-corp from
source-address 192.0.2.16/28
set firewall family ethernet-switching filter watch-employee term employee-to-corp then accept
set firewall family ethernet-switching filter watch-employee term employee-to-web from
destination-port 80
set firewall family ethernet-switching filter watch-employee term employee-to-web then analyzer
employee-web-monitor
set interfaces xe-0/0/0 unit 0 family ethernet-switching filter input watch-employee
set interfaces xe-0/0/6 unit 0 family ethernet-switching filter input watch-employee
```



**Step-by-Step Procedure** To configure local port mirroring of employee-to-web traffic from the two ports connected to employee computers:

1. Configure the output interface:

```
[edit interfaces]
user@switch# set xe-0/0/47 unit 0 family ethernet-switching
```

2. Configure the **employee-web-monitor** analyzer output. (Configure only the output—the input comes from the filter.)

```
[edit ethernet-switching-options]
user@switch# set analyzer employee-web-monitor output interface xe-0/0/47.0
```

3. Configure a firewall filter called **watch-employee** that includes a term to match traffic sent to the Web and send it to the analyzer **employee-web-monitor**. Traffic to and from the corporate subnet (destination or source address of **192.0.2.16/28**) does not need to be copied, so create another term to accept that traffic before it reaches the term that sends Web traffic to the analyzer:

```
[edit firewall family ethernet-switching]
user@switch# set filter watch-employee term employee-to-corp from destination-address 192.0.2.16/28
user@switch# set filter watch-employee term employee-to-corp from source-address 192.0.2.16/28
user@switch# set filter watch-employee term employee-to-corp then accept
user@switch# set filter watch-employee term employee-to-web from destination-port 80
user@switch# set filter watch-employee term employee-to-web then analyzer employee-web-monitor
```

4. Apply the firewall filter to the appropriate interfaces as an ingress filter (egress filters do not allow analyzers):

```
[edit interfaces]
user@switch# set xe-0/0/0 unit 0 family ethernet-switching filter input watch-employee
user@switch# set xe-0/0/6 unit 0 family ethernet-switching filter input watch-employee
```

**Results** Check the results of the configuration:

```
[edit]
user@switch# show ethernet-switching-options
  analyzer employee-web-monitor {
    output {
      interface xe-0/0/47.0;
    }
  }
...
firewall family ethernet-switching {
  filter watch-employee {
    term employee-to-web {
      from {
        destination-port 80;
      }
      then analyzer employee-web-monitor;
    }
  }
}
...
interfaces {
```



```

xe-0/0/0 {
  unit 0 {
    family ethernet-switching {
      filter {
        input watch-employee;
      }
    }
  }
}
xe-0/0/6 {
  family ethernet-switching {
    filter {
      input watch-employee;
    }
  }
}

```

## Verification

### *Verifying That the Analyzer Has Been Correctly Created*

**Purpose** Verify that the analyzer named **employee-monitor** or **employee-web-monitor** has been created on the switch with the appropriate input interfaces and appropriate output interface.

**Action** You can verify that the port mirror analyzer has been configured as expected using the **show analyzer** command.

```

user@switch> show analyzer
Analyzer name           : employee-monitor
Output interface        : xe-0/0/47.0
Mirror ratio            : 1
Loss priority           : Low
Ingress monitored interfaces : xe-0/0/0.0
Ingress monitored interfaces : xe-0/0/6.0
Egress monitored interfaces  : None

```

**Meaning** This output shows that the **employee-monitor** analyzer:

- Has a ratio of 1 (mirroring every packet, the default setting)
- Has a loss priority of low (set this option to high only when the analyzer output is to a VLAN)
- Is mirroring the traffic entering the **xe-0/0/0** and **xe-0/0/6** interfaces
- Is sending the mirrored traffic to the **xe-0/0/47** interface

**Related Documentation**

- [Understanding Port Mirroring on page 4313](#)
- [Configuring Port Mirroring on page 4328](#)



## Example: Configuring Port Mirroring for Remote Analysis

Use port mirroring to send traffic to applications that analyze traffic for purposes such as monitoring compliance, enforcing policies, detecting intrusions, monitoring and predicting traffic patterns, correlating events, and so on. Port mirroring copies packets entering or exiting an interface or entering a VLAN and sends the copies either to a local interface for local monitoring or to a VLAN for remote monitoring. This example describes how to configure port mirroring for remote analysis.

- [Requirements on page 4324](#)
- [Overview and Topology on page 4324](#)
- [Mirroring All Employee Traffic for Remote Analysis on page 4325](#)
- [Mirroring Employee-to-Web Traffic for Remote Analysis on page 4326](#)
- [Verification on page 4328](#)

---

### Requirements

This example uses the following hardware and software components:

- Junos OS Release 12.1 for the QFX Series
- A switch

---

### Overview and Topology

This topic includes two related examples that describe how to mirror traffic entering ports on the switch to an analyzer VLAN so that you can perform analysis using a remote device. The first example shows how to mirror all traffic sent by employee computers to the switch. The second example includes a filter to mirror only the employee traffic going to the Web.

In this example:

- Interfaces **ge-0/0/0** and **ge-0/0/1** are Layer 2 interfaces that connect to employee computers.
- Interface **ge-0/0/10** is a Layer 2 interface that connects to another switch.
- VLAN **remote-analyzer** is configured on all switches in the topology to carry the mirrored traffic.



**NOTE:** In addition to performing the configuration steps described here, you must also configure the analyzer VLAN (**remote-analyzer** in this example) on the other switches that are used to connect the source switch (the one in this configuration) to the one that the monitoring station is connected to.

---



### Mirroring All Employee Traffic for Remote Analysis

**CLI Quick Configuration** To quickly configure this section of the example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **edit** hierarchy level:

```
[edit]
set vlans remote-analyzer vlan-id 999
set interfaces ge-0/0/10 unit 0 family ethernet-switching port-mode trunk
set interfaces ge-0/0/10 unit 0 family ethernet-switching vlan members 999
set ethernet-switching-options analyzer employee-monitor input ingress interface ge-0/0/0.0
set ethernet-switching-options analyzer employee-monitor input ingress interface ge-0/0/1.0
set ethernet-switching-options analyzer employee-monitor output vlan remote-analyzer
```

**Step-by-Step Procedure** To configure basic remote port mirroring:

1. Configure the analyzer VLAN (called **remote-analyzer** in this example):  

```
[edit vlans]
user@switch# set vlans remote-analyzer vlan-id 999
```
2. Configure the interface connected to another switch for trunk mode and associate it with the **remote-analyzer** VLAN:  

```
[edit interfaces]
user@switch# set ge-0/0/10 unit 0 family ethernet-switching port-mode trunk
user@switch# set ge-0/0/10 unit 0 family ethernet-switching vlan members 999
```
3. Configure the **employee-monitor** analyzer:  

```
[edit ethernet-switching-options]
user@switch# set analyzer employee-monitor
user@switch# set analyzer employee-monitor input ingress interface ge-0/0/0.0
user@switch# set analyzer employee-monitor input ingress interface ge-0/0/1.0
user@switch# set analyzer employee-monitor output vlan remote-analyzer
```
4. Configure the **remote-analyzer** VLAN on the switches that connect this switch to the monitoring workstation.

**Results** Check the results of the configuration:

```
[edit]
user@switch# show
ethernet-switching-options {
  analyzer employee-monitor {
    input {
      ingress {
        interface ge-0/0/0.0;
        interface ge-0/0/1.0;
      }
    }
    output {
      vlan {
        remote-analyzer;
      }
    }
  }
}
```



## Mirroring Employee-to-Web Traffic for Remote Analysis

**CLI Quick Configuration** To quickly configure this section of the example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **edit** hierarchy level:

```
[edit]
set vlans remote-analyzer vlan-id 999
set interfaces ge-0/0/10 unit 0 family ethernet-switching port mode trunk
set interfaces ge-0/0/10 unit 0 family ethernet-switching vlan members 999
set ethernet-switching-options analyzer employee-web-monitor loss-priority high output vlan 999
set firewall family ethernet-switching filter watch-employee term employee-to-web from destination-port 80
set firewall family ethernet-switching filter watch-employee term employee-to-web then analyzer employee-web-monitor
set ge-0/0/0 unit 0 family ethernet-switching filter input watch-employee
set interfaces ge-0/0/1 unit 0 family ethernet-switching filter input watch-employee
```

**Step-by-Step Procedure**

1. Configure the analyzer VLAN (called **remote-analyzer** in this example):  

```
[edit vlans]
user@switch# set remote-analyzer vlan-id 999
```
2. Configure an interface to associate it with the **remote-analyzer** VLAN:  

```
[edit interfaces]
user@switch# set interfaces ge-0/0/10 unit 0 family ethernet-switching port mode trunk
user@switch# set ge-0/0/10 unit 0 family ethernet-switching vlan members 999
```
3. Configure the **employee-web-monitor** analyzer. (Configure only the output—the input comes from the filter.)  

```
[edit ethernet-switching-options]
user@switch# set ethernet-switching-options analyzer employee-web-monitor output vlan 999
```
4. Configure a firewall filter called **watch-employee** to match traffic sent to the Web and send it to the analyzer **employee-web-monitor**:  

```
[edit firewall family ethernet-switching]
user@switch# set filter watch-employee term employee-to-web from destination-port 80
user@switch# set filter watch-employee term employee-to-web then analyzer employee-web-monitor
```
5. Apply the firewall filter to the appropriate interfaces as an ingress filter:  

```
[edit interfaces]
user@switch# set ge-0/0/0 unit 0 family ethernet-switching filter input watch-employee
user@switch# set ge-0/0/1 unit 0 family ethernet-switching filter input watch-employee
```
6. Configure the **remote-analyzer** VLAN on the switches that connect this switch to the monitoring workstation.

**Results** Check the results of the configuration:

```
[edit]
user@switch# show
interfaces {
  ...
  ge-0/0/10 {
    unit 0 {
      family ethernet-switching {
```



```

        port-mode trunk;
        vlan {
            members remote-analyzer;
        }
    }
}
ge-0/0/0 {
    unit 0 {
        family ethernet-switching {
            filter {
                input watch-employee;
            }
        }
    }
}
ge-0/0/1 {
    unit 0 {
        family ethernet-switching {
            filter {
                input watch-employee;
            }
        }
    }
}
...
firewall {
    family ethernet-switching {
        ...
        filter watch-employee {
            term employee-to-web {
                from {
                    destination-port 80;
                }
                then analyzer employee-web-monitor;
            }
        }
    }
}
ethernet-switching-options {
    analyzer employee-web-monitor {
        output {
            vlan {
                999;
            }
        }
    }
}
vpls {
    remote-analyzer {
        vlan-id 999;
    }
}

```



## Verification

---

### *Verifying That the Analyzer Has Been Correctly Created*

- Purpose** Verify that the analyzer named **employee-monitor** or **employee-web-monitor** has been created on the switch with the appropriate input interfaces and appropriate output interface.
- Action** You can verify the port mirror analyzer is configured as expected using the **show analyzer** command.
- ```
user@switch> show analyzer
Analyzer name       : employee-monitor
Output VLAN        : remote-analyzer
Ingress monitored interfaces : ge-0/0/0.0
Ingress monitored interfaces : ge-0/0/1.0
```
- Meaning** This output shows that the **employee-monitor** analyzer is mirroring the traffic entering **ge-0/0/0** and **ge-0/0/1** and is sending the mirror traffic to the analyzer **remote-analyzer**.
- Related Documentation**
- [Understanding Port Mirroring on page 4313](#)
  - [Configuring Port Mirroring on page 4328](#)
  - [Example: Configuring Port Mirroring for Local Analysis on page 4319](#)
  - [Overview of Firewall Filters on page 4071](#)

## Configuration Tasks

---

- [Configuring Port Mirroring on page 4328](#)
- [Configuring DHCP and BOOTP Relay on page 4331](#)

### Configuring Port Mirroring

You use port mirroring to copy packets and send the copies to a device running an application such as a network analyzer or intrusion detection application so that you can analyze traffic without delaying it. You can mirror traffic entering or exiting a port or entering a VLAN, and you can send the copies to a local access interface or to a VLAN through a trunk interface.

We recommend that you disable port mirroring when you are not using it. To avoid creating a performance issue. If you do enable port mirroring, we recommend that you select specific input interfaces instead of using the **all** keyword. You can also limit the amount of mirrored traffic by using a firewall filter.



**NOTE:** If you want to create additional analyzers without deleting an existing analyzer, first disable the existing analyzer using the **disable analyzer analyzer-name** command.

---





**NOTE:** You must configure port mirroring output interfaces as family `ethernet-switching`.

- [Configuring Port Mirroring for Local Analysis on page 4329](#)
- [Configuring Port Mirroring for Remote Analysis on page 4329](#)
- [Filtering the Traffic Entering an Analyzer on page 4330](#)

### Configuring Port Mirroring for Local Analysis

To mirror interface traffic to a local interface on the switch:

1. If you want to mirror traffic that is ingressing or egressing specific interfaces, choose a name for the port-mirroring configuration and configure what traffic should be mirrored by specifying the interfaces and direction of traffic:

```
[edit ethernet-switching-options]
user@switch# set analyzer analyzer-name input (ingress | egress) interface interface-name
```



**NOTE:** If you configure Junos OS to mirror egress packets, do not configure more than 2000 VLANs. If you do so, some VLAN packets might contain incorrect VLAN IDs.



**NOTE:** If you configure mirroring for packets that egress an access interface, the original packets lose any VLAN tags when they exit the access interface, but the mirrored (copied) packets retain the VLAN tags when they are sent to the analyzer system.

2. If you want to specify that all traffic entering a VLAN should be mirrored, choose a name for the port-mirroring configuration and specify the VLAN:

```
[edit ethernet-switching-options]
user@switch# set analyzer analyzer-name input ingress vlan vlan-name
```



**NOTE:** You cannot configure port mirroring to copy traffic that egresses a VLAN.

3. Configure the destination interface for the mirrored packets:

```
[edit ethernet-switching-options]
user@switch# set analyzer analyzer-name output interface interface-name
```

### Configuring Port Mirroring for Remote Analysis

To mirror traffic to a VLAN for analysis at a remote location:

1. Configure a VLAN to carry the mirrored traffic:

```
[edit]
```



```
user@switch# set vlans vlan-name vlan-id number
```

2. Configure the interface that connects to another switch (the uplink interface) to trunk mode and associate it with the appropriate VLAN:

```
[edit]
```

```
user@switch# set interfaces interface-name unit 0 family ethernet-switching port-mode  
trunk vlan members (vlan-name | vlan-id)
```

3. Configure the analyzer:

- a. Choose a name for the analyzer:

```
[edit ethernet-switching-options]  
user@switch# set analyzer analyzer-name
```

- b. Specify the interface to be mirrored and whether the traffic should be mirrored on ingress or egress:

```
[edit ethernet-switching-options]  
user@switch# set analyzer analyzer-name input (ingress | egress) interface interface-name
```

- c. Specify the appropriate IP address or VLAN as the output (a VLAN is specified in this example:

```
[edit ethernet-switching-options]  
user@switch# set analyzer analyzer-name output vlan (vlan-name | vlan-id)
```

If you specify an IP address as the output, note the following constraints:

- The address cannot be in the same subnet as any of the switch's management interfaces.
- If you create virtual routing instances and also create an analyzer configuration that includes an output IP address, the output address belongs to the default virtual routing instance (**inet.0** routing table).
- The analyzer device must be able to de-encapsulate GRE-encapsulated packets, or the GRE-encapsulated packets must be de-encapsulated before reaching the analyzer device. (You can use a network sniffer to de-encapsulate the packets.)

### Filtering the Traffic Entering an Analyzer

---

In addition to specifying which traffic to mirror by configuring an analyzer, you can also use a firewall filter to exercise more control over which packets are copied. For example, you might use a filter to specify that only traffic from certain applications be mirrored. The filter can use any of the available match conditions and must have an action of **analyzer *analyzer-name***. If you use the same analyzer in multiple filters or terms, the output packets are copied only once.



**NOTE:** You can include the action **analyzer** in ingress firewall filters only. You can apply ingress filters with this action to ports (Layer 2 interfaces), Layer 3 interfaces, and VLANs.

When you use a firewall filter as the input to an analyzer, you output the copied traffic to a local interface or a VLAN just as you do when a firewall is not involved.



To configure port mirroring with filters:

1. Configure an analyzer for local or remote analysis. Configure only the output. For example, for local analysis enter:

```
[edit ethernet-switching-options]
user@switch# set analyzer analyzer-name output interface interface-name
```



**NOTE:** Do not configure input to this analyzer.

2. Create a firewall filter using any of the available match conditions and specify the action as **analyzer *analyzer-name***.
3. Apply the firewall filter to the interfaces or VLAN that should provide the input to the analyzer:

```
[edit]
user@switch# set interfaces interface-name unit 0 family ethernet-switching filter input
filter-name
[edit]
user@switch# set vlan (vlan-name | vlan-id) filter input filter-name
```

#### Related Documentation

- [Understanding Port Mirroring on page 4313](#)
- [Example: Configuring Port Mirroring for Local Analysis on page 4319](#)
- [Example: Configuring Port Mirroring for Remote Analysis on page 4324](#)
- [Overview of Firewall Filters on page 4071](#)

## Configuring DHCP and BOOTP Relay

You can configure the QFX Series to act as a Dynamic Host Configuration Protocol (DHCP) and Bootstrap Protocol (BOOTP) relay agent. This means that if a locally attached host can issue a DHCP or BOOTP request as a broadcast message and the switch relays the message to a specified DHCP or BOOTP server. You should configure a switch to be a DHCP and BOOTP relay agent if you have locally attached hosts and a remote DHCP or BOOTP server.

If you configure a switch to be a DHCP relay agent, you can also enable smart DHCP relay, which allows you to configure alternative gateway addresses for a DHCP server so that if the server fails to reply to the requests sent using the primary gateway address, the switch can resend the requests via the alternative gateway addresses. To use this feature, you must configure a routed VLAN interface or Layer 3 logical interface with multiple IP addresses and configure that interface to be a relay agent.

- [Configuring a DHCP and BOOTP Relay Agent on page 4331](#)
- [Configuring DHCP Smart Relay on page 4333](#)

### Configuring a DHCP and BOOTP Relay Agent

To configure a switch to act as a DHCP and BOOTP relay agent, include the **bootp** statement at the **[edit forwarding-options helpers]** hierarchy level:



```
[edit forwarding-options helpers]
bootp {
  apply-secondary-as-giaddr text-description;
  client-response-ttl number;
  description text-description;
  interface (interface-name | interface-group) {
    client-response-ttl number;
    description text-description;
    maximum-hop-count number;
    minimum-wait-time seconds;
    no-listen;
    server address
    apply-secondary-as-giaddr
  }
  maximum-hop-count number;
  minimum-wait-time seconds;
  relay-agent-option;
  server server-identifier
}
```

To include a description of the BOOTP service, DHCP service, or interface, use the **description** statement.

To configure a logical interface or a group of logical interfaces with a specific DHCP relay or BOOTP configuration, include the **interface** statement.

To stop packets from being forwarded, include the **no-listen** statement.

To set the maximum allowed number in the hops field of the BOOTP message, include the **maximum-hop-count** statement. BOOTP messages that have a larger number in the hops field than the maximum allowed are not forwarded. If you omit the **maximum-hop-count** statement, the default maximum number of hops is four.

To set the minimum allowed number of seconds in the **secs** field of the BOOTP message, include the **minimum-wait-time** statement. This setting configures a minimum number of seconds since the client sent its first BOOTP request. BOOTP messages that have a smaller number in the **secs** field than the allowed minimum are not forwarded. The default value for the minimum wait time is zero (0).

To set the IP address that specify the DHCP or BOOTP server for the router, switch, or interface, include the **server** statement. You can include multiple **server** statements.

To set an IP time-to-live (TTL) value for DHCP response packets sent to a DHCP client, include the **client-response-ttl** statement.

The following example demonstrates a BOOTP relay agent configuration.

```
user@host# show forwarding-options
helpers {
  bootp {
    description "dhcp relay agent global parameters";
    server 192.168.55.44;
    server 172.16.0.3 routing-instance c3;
    maximum-hop-count 10;
    minimum-wait-time 8;
```



```

interface {
  xe-0/0/1 {
    description "use this info for this interface";
    server 10.10.10.10;
    server 192.168.14.14;
    maximum-hop-count 11;
    minimum-wait-time 3;
  }
  xe-0/0/2 {
    no-listen; ###ignore DHCPDISCOVER messages on this interface
  }
  all {
    description "globals apply to all other interfaces";
  }
}
}

```

### Configuring DHCP Smart Relay

You can use DHCP smart relay to provide redundancy and resiliency to your DHCP relay configuration. Smart relay provides additional relay functionality and requires all of the configuration settings required by DHCP relay. To use DHCP smart relay, you also need an interface with multiple IP addresses assigned to it. You can achieve this by doing either of the following tasks:

- Create a routed VLAN interface and assign at least two IP addresses to it. See [“Configuring Routed VLAN Interfaces” on page 1551](#) and [“Example: Configuring Routing Between VLANs on One Switch” on page 1481](#) for information about this approach.
- Create a Layer 3 logical interface (by using VLAN tagging) and assign at least two IP addresses to it. See [“Understanding Layer 3 Logical Interfaces” on page 1930](#) and [“Configuring a Layer 3 Logical Interface” on page 2033](#) for information about this approach.

Once you have created an interface with multiple IP addresses, complete the smart relay configuration by entering one of the following statements:

- **set forwarding-options helpers bootp smart-relay-global:** Use this statement to enable smart relay on all the interfaces that are configured as relay agents.
- **set forwarding-options helpers bootp interface *interface-name* smart-relay-agent:** Use this statement to enable smart relay on a specific interface.

When smart relay is configured for an interface, the switch initially sends DHCP request (discover) messages out of that interface using the primary address of the interface as the gateway IP address (in the giaddr field) for the DHCP message. If no DHCP offer message is received from a server in reply, the switch allows the client to send as many as three more discover messages using the same gateway IP address. If no DHCP offer message is received after three retries, the switch resends the discover message using the alternate IP address as the gateway IP address. If you configure more than two IP addresses on the relay agent interface, the switch repeats this process until a DHCP offer message is received or all of the IP addresses have been used without success.



## Configuration Statements for Port Mirroring

---



## analyzer

```
Syntax analyzer {
    name {
        input {
            egress {
                interface (all | interface-name);
            }
            ingress {
                interface (all | interface-name);
                vlan (vlan-id | vlan-name);
            }
        }
        output {
            interface interface-name;
            ip-address ip-address;
            vlan (vlan-id | vlan-name);
        }
    }
}
```

**Hierarchy Level** [edit [ethernet-switching-options](#)]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.  
Option **output** **vlan** added in Junos OS Release 12.1 for the QFX Series.  
Option **output** **ip-address** added in Junos OS Release 12.3 for the QFX Series.

**Description** Configure port mirroring. You can create a total of four port-mirroring configurations on the QFX Series, subject to the following limits:

- There can be no more than two configurations that mirror ingress traffic.
- There can be no more than two configurations that mirror egress traffic.

**Default** Port mirroring is disabled, and Junos OS creates no default analyzers.

**Options** **all**—Mirror all the access interfaces. Using this option does not cause the QSFP+ or management interfaces to be mirrored.



**CAUTION:** Configuring the **all** option in a QFabric system causes all the access interfaces on all the nodes to be mirrored. Be cautious about using this option on a QFabric system.

**name**—Name of the analyzer. The name can include as many as 125 characters; must begin with a letter; and can include uppercase letters, lowercase letters, numbers, dashes, and underscores. No other special characters are allowed.

The remaining statements are explained separately.



**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Understanding Port Mirroring on page 4313](#)
- [Configuring Port Mirroring on page 4328](#)
- [Example: Configuring Port Mirroring for Local Analysis on page 4319](#)

---

## egress

---

**Syntax** egress {  
    **interface** (all | *interface-name*);  
}

**Hierarchy Level** [edit **ethernet-switching-options analyzer name input**]

**Release Information** Statement introduced in Junos OS Release 11.2 for the QFX Series.

**Description** Specify interfaces for which egressing traffic is mirrored.

The statement is explained separately.



.....

**NOTE:** If you configure Junos OS to mirror egress packets, do not configure more than 2000 VLANs. If you do so, some of the mirrored packets might contain incorrect VLAN IDs.

.....

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Understanding Port Mirroring on page 4313](#)
- [Configuring Port Mirroring on page 4328](#)
- [Example: Configuring Port Mirroring for Local Analysis on page 4319](#)



## ethernet-switching-options

```
Syntax ethernet-switching-options {
  analyzer {
    name {
      input {
        egress {
          interface (all | interface-name);
        }
        ingress {
          interface (all | interface-name);
          vlan (vlan-id | vlan-name);
        }
      }
      output {
        interface interface-name;
        ip-address ip-address;
        vlan (vlan-id | vlan-name);
      }
    }
  }
  bpdv-block {
    interface (all | [interface-name]);
    disable-timeout timeout;
  }
  dot1q-tunneling {
    ether-type (0x8100 | 0x88a8 | 0x9100)
  }
  interfaces interface-name {
    no-mac-learning;
  }
  mac-table-aging-time seconds {
  }
  port-error-disable {
    disable-timeout timeout;
  }
  secure-access-port {
    dhcp-snooping-file {
      location local_pathname | remote_URL;
      timeout seconds;
      write-interval seconds;
    }
    interface (all | interface-name) {
      allowed-mac {
        mac-address-list;
      }
      (dhcp-trusted | no-dhcp-trusted);
      fcoe-trusted;
      mac-limit limit action action;
      no-allowed-mac-log;
    }
    vlan (all | vlan-name) {
      (arp-inspection | no-arp-inspection) [
        forwarding-class (for DHCP Snooping or DAI Packets) class-name;
      ]
    }
  }
}
```



```

dhcp-option82 {
  circuit-id {
    prefix (Circuit ID for Option 82) hostname;
    use-interface-description;
    use-vlan-id;
  }
  remote-id {
    prefix (Remote ID for Option 82) hostname | mac | none;
    use-interface-description;
    use-string string;
  }
  vendor-id <string>;
}
(examine-dhcp | no-examine-dhcp) {
  forwarding-class (for DHCP Snooping or DAI Packets) class-name;
}
examine-fip {
  examine-vn2vn {
    beacon-period milliseconds;
  }
  fc-map fc-map-value;
}
mac-move-limit limit <fabric-limit limit action action>;
}
}
storm-control {
  interface (all | interface-name) {
    bandwidth bandwidth;
    no-broadcast;
    no-multicast;
    no-unknown-unicast;
  }
}
traceoptions {
  file filename <files number> <no-stamp> <replace> <size size> <world-readable |
no-world-readable>;
  flag flag <disable>;
}
unknown-unicast-forwarding {
  vlan (all | vlan-name) {
    interface interface-name;
  }
}
}
}

```

Hierarchy Level [\[edit\]](#)

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure Ethernet switching options.

The remaining statements are explained separately.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.



- Related Documentation**
- [Understanding Port Mirroring on page 4313](#)
  - [Overview of Access Port Protection on page 4105](#)
  - [Understanding Storm Control on page 4125](#)
  - [Understanding Unknown Unicast Forwarding on page 4126](#)

## ingress (ethernet-switching-options)

|                                 |                                                                                                                                                                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>ingress {   interface (all   <i>interface-name</i>);   vlan (<i>vlan-id</i>   <i>vlan-name</i>); }</pre>                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit <b>ethernet-switching-options analyzer name input</b> ]                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                               |
| <b>Description</b>              | <p>Specify the interfaces or VLANs for which incoming traffic is mirrored as part of a port mirroring configuration.</p> <p>The statements are explained separately.</p>                                                                                                        |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.routing-control—To add this statement to the configuration.                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Port Mirroring on page 4313</a></li> <li>• <a href="#">Configuring Port Mirroring on page 4328</a></li> <li>• <a href="#">Example: Configuring Port Mirroring for Local Analysis on page 4319</a></li> </ul> |



## input

---

**Syntax**    `input {  
              ingress {  
                  interface (all | interface-name);  
                  vlan (vlan-id | vlan-name);  
              }  
              egress {  
                  interface (all | interface-name);  
              }  
          }`

**Hierarchy Level**    [edit `ethernet-switching-options analyzer name`]

**Release Information**    Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Define the traffic to be mirrored. The definition can be a combination of traffic entering or exiting specific ports or VLANs.

                  The statements are explained separately.

**Default**    No default.

**Required Privilege Level**    routing—To view this statement in the configuration.  
                                  routing-control—To add this statement to the configuration.

**Related Documentation**

- [Understanding Port Mirroring on page 4313](#)
- [Configuring Port Mirroring on page 4328](#)
- [Example: Configuring Port Mirroring for Local Analysis on page 4319](#)



## interface (Port Mirroring)

|                            |                                                                                                                                                                                                                                                                   |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>interface (all   <i>interface-name</i>);</code>                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>     | [edit <a href="#">ethernet-switching-options analyzer <i>name</i> input egress</a> ],<br>[edit <a href="#">ethernet-switching-options analyzer <i>name</i> input ingress</a> ],<br>[edit <a href="#">ethernet-switching-options analyzer <i>name</i> output</a> ] |
| <b>Release Information</b> | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                 |
| <b>Description</b>         | Specify the interfaces for which ingressing traffic is mirrored. Specify the interface that mirrored traffic should be copied to (the output interface).                                                                                                          |
| <b>Options</b>             | <code>all</code> —Apply port mirroring to all interfaces on the switch (except the output interface).<br>Mirroring a high volume of traffic can cause performance issues, so you should generally select specific input interfaces.                               |



**CAUTION:** Configuring `all` in a QFabric system causes all the access interfaces on all the nodes to be mirrored. Be cautious about using this option on a QFabric system.

*interface-name*—Apply port mirroring to the specified interface only.

|                                 |                                                                                                                                                                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | <code>routing</code> —To view this statement in the configuration.<br><code>routing-control</code> —To add this statement to the configuration.                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Port Mirroring on page 4313</a></li> <li>• <a href="#">Configuring Port Mirroring on page 4328</a></li> <li>• <a href="#">Example: Configuring Port Mirroring for Local Analysis on page 4319</a></li> </ul> |



## ip-address (Port Mirroring)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ip-address <i>ip-address</i>;</code>                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options analyzer name output</a> ]                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | Specify the IP address to which traffic should be mirrored (the IP address of the analyzer system). The device can be on a remote network. The analyzer device must be able to de-encapsulate GRE-encapsulated packets, or the GRE-encapsulated packets must be de-encapsulated before reaching the analyzer device. (You can use a network sniffer to de-encapsulate the packets.) |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Understanding Port Mirroring on page 4313</a></li><li>• <a href="#">Configuring Port Mirroring on page 4328</a></li><li>• <a href="#">Example: Configuring Port Mirroring for Local Analysis on page 4319</a></li></ul>                                                                                                         |

## output

---

|                                 |                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>output {<br/>  <a href="#">interface</a> <i>interface-name</i>;<br/>  <a href="#">ip-address</a> <i>ip-address</i>;<br/>  <a href="#">vlan</a> (<i>vlan-id</i>   <i>vlan-name</i>);<br/>}</pre>                                                                        |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options analyzer name</a> ]                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>Option <b>output vlan</b> added in Junos OS Release 12.1 for the QFX Series.                                                                                                                           |
| <b>Description</b>              | Configure the destination for mirrored traffic, either an interface on the switch (for local monitoring) or a VLAN (for remote monitoring).<br><br>The statements are explained separately.                                                                                 |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Understanding Port Mirroring on page 4313</a></li><li>• <a href="#">Configuring Port Mirroring on page 4328</a></li><li>• <a href="#">Example: Configuring Port Mirroring for Local Analysis on page 4319</a></li></ul> |



## vlan (Port Mirroring)

---

|                                 |                                                                                                                                                                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>vlan (<i>vlan-id</i>   <i>vlan-name</i>);</code>                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options analyzer <i>name</i> input ingress</a> ],<br>[edit <a href="#">ethernet-switching-options analyzer <i>name</i> output</a> ]                                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>Option <code>output vlan</code> added in Junos OS Release 12.1 for the QFX Series.                                                                                                                         |
| <b>Description</b>              | Specify that traffic entering into a VLAN should be mirrored. Configure mirrored traffic to be sent to a VLAN for remote monitoring (output).                                                                                                                                   |
| <b>Options</b>                  | <i>vlan-id</i> —Numeric VLAN identifier.<br><i>vlan-name</i> —Name of the VLAN.                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | <code>routing</code> —To view this statement in the configuration.<br><code>routing-control</code> —To add this statement to the configuration.                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Port Mirroring on page 4313</a></li> <li>• <a href="#">Configuring Port Mirroring on page 4328</a></li> <li>• <a href="#">Example: Configuring Port Mirroring for Local Analysis on page 4319</a></li> </ul> |



## Configuration Statements for Encryption

### authentication-key-chains

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> authentication-key-chains {   key-chain key-chain-name {     description text-string;     key key {       algorithm (md5   hmac-sha-1);       options (basic   isis-enhanced);       secret secret-data;       start-time yyyy-mm-dd.hh:mm:ss;     }     tolerance seconds;   } } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit security]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.6.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Support for IS-IS introduced in JUNOS OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Configure authentication key updates for the Border Gateway Protocol (BGP), the Label Distribution Protocol (LDP) routing protocols, the Bidirectional Forwarding Detection (BFD) protocol, and the Intermediate System-to-Intermediate System (IS-IS) protocol. When the <b>authentication-key-chains</b> statement is configured at the <b>[edit security]</b> hierarchy level, and is associated with the BGP, LDP, or IS-IS protocols at the <b>[edit protocols]</b> hierarchy level or with the BFD protocol using the <b>bfd-liveness-detection</b> statement, authentication key updates can occur without interrupting routing and signaling protocols such as Open Shortest Path First (OSPF) and Resource Reservation Setup Protocol (RSVP).</p> <p>The remaining statements are explained separately.</p> |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring the Authentication Key Update Mechanism for BGP and LDP Routing Protocols</li> <li><a href="#">Example: Configuring BFD Authentication for Static Routes on page 2341</a></li> <li><a href="#">Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 3135</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |



## cache-size

---

|                            |                                                                                                                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | cache-size <i>bytes</i> ;                                                                                                                                                                      |
| <b>Hierarchy Level</b>     | [edit security <a href="#">certificates</a> ]                                                                                                                                                  |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>         | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Configure the cache size for digital certificates.                                                      |
| <b>Options</b>             | <b>bytes</b> —Cache size for digital certificates.<br><b>Range:</b> 64 through 4,294,967,295<br><b>Default:</b> 2 megabytes (MB)                                                               |



**NOTE:** We recommend that you limit your cache size to 4 MB.

|                                 |                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring Digital Certificates for an ES PIC</li> </ul>               |



## cache-timeout-negative

---

|                            |                                                                                                                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | cache-timeout-negative <i>seconds</i> ;                                                                                                                                                        |
| <b>Hierarchy Level</b>     | [edit security <a href="#">certificates</a> ]                                                                                                                                                  |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>         | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Configure a negative cache for digital certificates.                                                    |
| <b>Options</b>             | <b>seconds</b> —Negative time to cache digital certificates, in seconds.<br><b>Range:</b> 10 through 4,294,967,295<br><b>Default:</b> 20                                                       |



**CAUTION:** Configuring a large negative cache value can lead to a denial-of-service attack.

|                                 |                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration |
|---------------------------------|----------------------------------------------------------------------------------------------------------------|

|                              |                                                                                                |
|------------------------------|------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>Configuring Digital Certificates for an ES PIC</li></ul> |
|------------------------------|------------------------------------------------------------------------------------------------|

## ca-name

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | ca-name <i>ca-identity</i> ;                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit security certificates <a href="#">certification-authority</a> ]                                                                                                                          |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Specify the certificate authority (CA) identity to use in the certificate request.                      |
| <b>Options</b>                  | <b>ca-identity</b> —CA identity to use in the certificate request.                                                                                                                             |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring Digital Certificates for an ES PIC</li></ul>                                                                                                 |



## certificates

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> certificates {   cache-size bytes;   cache-timeout-negative seconds;   certification-authority ca-profile-name {     ca-name ca-identity;     crt file-name;     encoding (binary   pem);     enrollment-url url-name;     file certificate-filename;     ldap-url url-name;   }   enrollment-retry attempts;   local certificate-name {     certificate-key-string;     load-key-file URL filename;   }   maximum-certificates number;   path-length certificate-path-length; } </pre> |
| <b>Hierarchy Level</b>          | [edit security]                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | <p>(Encryption interface on M Series and T Series routers and EX Series switches only)</p> <p>Configure the digital certificates for IPsec.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring Digital Certificates for an ES PIC</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                              |



## certification-authority

---

|                                 |                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>certification-authority <i>ca-profile-name</i> {<br/>    <i>ca-name</i> <i>ca-identity</i>;<br/>    <i>crl</i> <i>file-name</i>;<br/>    <i>encoding</i> (binary   pem);<br/>    <i>enrollment-url</i> <i>url-name</i>;<br/>    <i>file</i> <i>certificate-filename</i>;<br/>    <i>ldap-url</i> <i>url-name</i>;<br/>}</code> |
| <b>Hierarchy Level</b>          | [edit security <a href="#">certificates</a> ]                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                       |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Configure a certificate authority profile name.<br><br>The remaining statements are explained separately.                                                                                                                                     |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring Digital Certificates for an ES PIC</li></ul>                                                                                                                                                                                                                                       |

## crl (Encryption Interface)

---

|                                 |                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>crl <i>file-name</i>;</code>                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit security <a href="#">certificates</a> ]                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                  |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Configure the certificate revocation list (CRL). A CRL is a time-stamped list identifying revoked certificates, which is signed by a CA and made available to the participating IPsec peers on a regular periodic basis. |
| <b>Options</b>                  | <i>file-name</i> —Specify the file from which to read the CRL.                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring Digital Certificates for an ES PIC</li></ul>                                                                                                                                                                                                                  |



## encoding

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | encoding (binary   pem);                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit security ike policy <i>ike-peer-address</i> ],<br>[edit security certificates <b>certification-authority</b> <i>ca-profile-name</i> ]                                                    |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Specify the file format used for the <b>local-certificate</b> and <b>local-key-pair</b> statements.     |
| <b>Options</b>                  | <b>binary</b> —Binary file format.<br><br><b>pem</b> —Privacy-enhanced mail (PEM), an ASCII base 64 encoded format.<br><b>Default:</b> binary                                                  |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring Digital Certificates for an ES PIC</li> <li>Configuring an IKE Policy for Digital Certificates for an ES PIC</li> </ul>                     |

## enrollment-retry

|                                 |                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | enrollment-retry <i>attempts</i> ;                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit security <b>certificates</b> ]                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                  |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Specify how many times a router or switch can resend a digital certificate request. |
| <b>Options</b>                  | <b>attempts</b> —Number of enrollment retries.<br><b>Range:</b> 0 through 100<br><b>Default:</b> 0                                                                         |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring Digital Certificates for an ES PIC</li> </ul>                                                                           |



## enrollment-url

---

|                                 |                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>enrollment-url <i>url-name</i>;</code>                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit security certificates <a href="#">certification-authority</a> <i>ca-profile-name</i> ]                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                          |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Specify where your router or switch sends Simple Certificate Enrollment Protocol-based (SCEP-based) certificate enrollment requests (certificate authority URL). |
| <b>Options</b>                  | <i>url-name</i> —Certificate authority URL.                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring Digital Certificates for an ES PIC</li></ul>                                                                                                                                                          |

## file

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>file <i>certificate-filename</i>;</code>                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit security certificates <a href="#">certification-authority</a> <i>ca-profile-name</i> ]                                                                                                   |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Specify the file from which to read the digital certificate.                                            |
| <b>Options</b>                  | <i>certificate-filename</i> —File from which to read the digital certificate.                                                                                                                  |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring Digital Certificates for an ES PIC</li></ul>                                                                                                 |



## key (Authentication Keychain)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>key key {   algorithm (md5   hmac-sha-1);   options (basic   isis-enhanced);   secret secret-data;   start-time yyyy-mm-dd.hh:mm:ss; }</pre>                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit security authentication-key-chains key-chain <i>key-chain-name</i> ]                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.6.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Support for IS-IS introduced in JUNOS OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 11.3 for QFX Series switches.</p> |
| <b>Description</b>              | Configure the authentication element.                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <p><b>key</b>—Each key within a keychain is identified by a unique integer value.</p> <p><b>Range:</b> 0 through 63</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring the Authentication Key Update Mechanism for BGP and LDP Routing Protocols</li> <li><a href="#">Example: Configuring BFD Authentication for Static Routes on page 2341</a></li> <li><a href="#">Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 3135</a></li> </ul>                                                                                                    |



## key-chain (Security)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>keychain <i>key-chain-name</i> {<br/>  description <i>text-string</i>;<br/>  key <i>key</i> {<br/>    algorithm (md5   hmac-sha-1);<br/>    options (basic   isis-enhanced);<br/>    secret <i>secret-data</i>;<br/>    start-time <i>yyyy-mm-dd.hh:mm:ss</i>;<br/>  }<br/>  tolerance <i>seconds</i>;<br/>}</pre>                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit security authentication-key-chains]                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.6.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Support for IS-IS introduced in Junos OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> |
| <b>Description</b>              | Create the key-chain configuration for the Border Gateway Protocol (BGP), the Label Distribution Protocol (LDP) routing protocols, the Bidirectional Forwarding Detection (BFD) protocol, and the Intermediate System-to-Intermediate System (IS-IS) protocol.                                                                                                                                                                                 |
| <b>Options</b>                  | <b><i>key-chain-name</i></b> —Authentication keychain name. It can be up to 126 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">authentication-key-chains on page 4344</a></li><li>• <a href="#">Configuring the Authentication Key Update Mechanism for BGP and LDP Routing Protocols</a></li><li>• <a href="#">Example: Configuring BFD Authentication for Static Routes on page 2341</a></li><li>• <a href="#">Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 3135</a></li></ul>            |



---

## ldap-url

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <ldap-url <i>url-name</i> >;                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit security certificates <a href="#">certification-authority</a> <i>ca-profile-name</i> ]                                                                                                   |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>(Optional) Specify the Lightweight Directory Access Protocol (LDAP) URL for digital certificates.       |
| <b>Options</b>                  | <i>url-name</i> —Name of the LDAP URL.                                                                                                                                                         |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring Digital Certificates for an ES PIC</li></ul>                                                                                                 |



## local

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>local <i>certificate-name</i> {<br/>    <i>certificate-key-string</i>;<br/>    load-key-file <i>URL filename</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit security <a href="#">certificates</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Import a paired X.509 private key and authentication certificate, to enable Junos XML protocol client applications to establish Secure Sockets Layer (SSL) connections to the router or switch.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <p><b><i>certificate-key-string</i></b>—String of alphanumeric characters that constitute the private key and certificate.</p> <p><b><i>certificate-name</i></b>—Name that uniquely identifies the certificate.</p> <p><b><i>load-key-file URL filename</i></b>—File that contains the private key and certificate. It can be one of two types of values:</p> <ul style="list-style-type: none"><li>• Pathname of a file on the local disk (assuming you have already used another method to copy the certificate file to the router's or switch's local disk)</li><li>• URL to the certificate file location (for instance, on the computer where the Junos XML protocol client application runs)</li></ul> |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Importing SSL Certificates for Junos XML Protocol Support</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



## maximum-certificates

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>maximum-certificates <i>number</i>;</code>                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit security <a href="#">certificates</a> ]                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Configure the maximum number of peer digital certificates to be cached.                                 |
| <b>Options</b>                  | <b><i>number</i></b> —Maximum number of peer digital certificates to be cached.<br><b>Range:</b> 64 through 4,294,967,295 peer certificates<br><b>Default:</b> 1024 peer certificates          |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring Digital Certificates for an ES PIC</li> </ul>                                                                                               |

## path-length

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>path-length <i>certificate-path-length</i>;</code>                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit security <a href="#">certificates</a> ]                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Configure the digital certificate path length.                                                          |
| <b>Options</b>                  | <b><i>certificate-path-length</i></b> —Digital certificate path length.<br><b>Range:</b> 2 through 15 certificates<br><b>Default:</b> 15 certificates                                          |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring Digital Certificates for an ES PIC</li> </ul>                                                                                               |



## secret

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>secret <i>secret-data</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit security authentication-key-chains key-chain <i>key-chain-name</i> key <i>key</i> ]                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.6.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Support for IS-IS introduced in JUNOS OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 11.3 for QFX Series switches.</p> |
| <b>Description</b>              | Specify a password in encrypted text or plain text format. The secret password always appears in encrypted format.                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                  | <b><i>secret-data</i></b> —Password to use; it can include spaces if the character string is enclosed in quotation marks.                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Configuring the Authentication Key Update Mechanism for BGP and LDP Routing Protocols</li><li>• <a href="#">Example: Configuring BFD Authentication for Static Routes on page 2341</a></li><li>• <a href="#">Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 3135</a></li></ul>                                                                                                  |



## security

```
Syntax  security {
    authentication-key-chains {
        key-chain key-chain-name {
            key key {
                secret secret-data;
                start-time yyyy-mm-dd.hh:mm:ss;
            }
        }
    }
    certificates {
        cache-size bytes;
        cache-timeout-negative seconds;
        certification-authority ca-profile-name {
            ca-name ca-identity;
            crl file-name;
            encoding (binary | pem);
            enrollment-url url-name;
            file certificate-filename;
            ldap-url url-name;
        }
        enrollment-retry attempts;
        local certificate-filename {
            certificate-key-string;
            load-key-file key-file-name;
        }
        maximum-certificates number;
        path-length certificate-path-length;
    }
    ssh-known-hosts {
        host {
            fetch-from-server host-name;
            load-key-file file-name;
        }
    }
    traceoptions {
        file filename <files number> <size size>;
        flag flag;
        level level;
        no-remote-trace
    }
}
```

Hierarchy Level [edit]

Release Information Statement introduced in Junos OS Release 11.1 for the QFX Series.

Description Configure security services. Most of the configuration statements do not have default values. If you do not specify an identifier for a statement that does not have a default value, you cannot commit the configuration.

Required Privilege  
Level



Related  
Documentation

## ssh-known-hosts

---

**Syntax**    ssh-known-hosts {  
              host *host-name* {  
                  fetch-from-server *host-name*;  
                  load-key-file *file-name*;  
              }  
          }

**Hierarchy Level**    [edit security ssh-known-hosts]

**Release Information**    Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Configure SSH support for known hosts and for administering SSH host key updates.

**Options**    **host *host-name***—Hostname of the SSH known host entry. This option has the following suboptions:

- **fetch-from-server *host-name***—Retrieve SSH public host key information from a specified server.
- **load-key-file *filename***—Import SSH host key information from the `/var/tmp/ssh-known-hosts` file.

**Required Privilege Level**    admin—To view this statement in the configuration.  
                                  admin-control—To add this statement to the configuration.

Related  
Documentation



## start-time (Authentication Key Transmission)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>start-time (now   yyyy-mm-dd.hh:mm:ss);</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit security authentication-key-chains key-chain <i>key-chain-name</i> key <i>key</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.6.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Support for IS-IS introduced in JUNOS OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 11.3 for QFX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | <p>Specify a start time for key transmission. You do not need to specify an end time for the key. If a new key is present with a new start time, the keychain rolls over to the new one. The start time must be unique within the keychain.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <p><b>now</b>—Start time as the current year, month, day, hour, minute, and second.</p> <p><b>daydays</b>—Start time as the specified number of days after the current day. For example, if the current day is the 12th and you configure <b>start-time 2day</b>, the start time will be on the 14th, exactly two days after the configuration is entered.</p> <p><b>hourhours</b>—Start time as the specified number of hours after the current hour. For example, if the current hour is 9:00 and you configure <b>start-time 3hour</b>, the start time will be in 12:00, exactly three hours after the configuration is entered.</p> <p><b>minuteminutes</b>—Start time as the specified number of minutes after the current minute. For example, if the current minute is 27 minutes after the hour and you configure <b>start-time 5min</b>, the start time will be in 32 minutes after the hour, exactly five minutes after the configuration is entered.</p> <p><b>monthmonths</b>—Start time as the specified number of months after the current month. For example, if the current month is March and you configure <b>start-time 4month</b>, the start time will be in July, exactly four months after the configuration is entered.</p> <p><b>secondseconds</b>—Start time as the specified number of seconds after the current second. For example, if the current second is 10:20:40 and you configure <b>start-time 10seconds</b>, the start time will be 10:20:50, exactly 10 seconds after the configuration is entered.</p> <p><b>yearyears</b>—Start time as the specified number of years after the current year. For example, if the current year is 2011 and you configure <b>start-time 1year</b>, the start time will be in 2012, exactly one year after the configuration is entered.</p> <p><b>yyyy-mm-dd.hh:mm:ss</b>—Start time in UTC (Coordinated Universal Time). The start time must be unique within the keychain.</p> |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |



**Related  
Documentation**

- Configuring the Authentication Key Update Mechanism for BGP and LDP Routing Protocols
- [Example: Configuring BFD Authentication for Static Routes on page 2341](#)
- [Example: Configuring BFD Authentication for Static Routes on page 2341](#)
- [Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 3135](#)



## traceoptions

**Syntax** traceoptions {  
     file *filename* <files *number*> <size *size*>;  
     flag all;  
     flag certificates;  
     flag database;  
     flag general;  
     flag ike;  
     flag parse;  
     flag policy-manager;  
     flag routing-socket;  
     flag timer;  
     level  
     no-remote-trace  
 }

**Hierarchy Level** [edit security],  
 [edit services ipsec-vpn]

Trace options can be configured at either the [edit security] or the [edit services ipsec-vpn] hierarchy level, but not at both levels.

**Release Information** Statement introduced before Junos OS Release 7.4.  
 Statement introduced in Junos OS Release 9.0 for EX Series switches.  
 Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure security trace options.

To specify more than one trace option, include multiple **flag** statements. Trace option output is recorded in the `/var/log/kmd` file.



**NOTE:** The `traceoptions` statement is not supported on QFabric systems.

**Options** **files *number***—(Optional) Maximum number of trace files. When a trace file (for example, **kmd**) reaches its maximum size, it is renamed **kmd.0**, then **kmd.1**, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

If you specify a maximum number of files, you must also specify a maximum file size with the **size** option.

**Range:** 2 through 1000 files

**Default:** 0 files

**size *size***—(Optional) Maximum size of each trace file, in kilobytes (KB). When a trace file (for example, **kmd**) reaches this size, it is renamed, **kmd.0**, then **kmd.1** and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

**Default:** 1024 KB



**flag *flag***—Trace operation to perform. To specify more than one trace operation, include multiple **flag** statements.

- **all**—Trace all security events.
- **certificates**—Trace certificate events.
- **database**—Trace database events.
- **general**—Trace general events.
- **ike**—Trace IKE module processing.
- **parse**—Trace configuration processing.
- **policy-manager**—Trace policy manager processing.
- **routing-socket**—Trace routing socket messages.
- **timer**—Trace internal timer events.

**level *level***—(Optional) Set traceoptions level.

- **all**—match all levels.
- **error**—Match error conditions.
- **info**—Match informational messages.
- **notice**—Match conditions that should be handled specially.
- **verbose**—Match verbose messages.
- **warning**—Match warning messages.

**no-remote-trace**—(Optional) Disable remote tracing

|                           |                                                           |
|---------------------------|-----------------------------------------------------------|
| <b>Required Privilege</b> | admin—To view the configuration.                          |
| <b>Level</b>              | admin-control—To add this statement to the configuration. |

|                              |                                                                        |
|------------------------------|------------------------------------------------------------------------|
| <b>Related Documentation</b> | • <a href="#">Configuring Tracing Operations for Security Services</a> |
|------------------------------|------------------------------------------------------------------------|



## Configuration Statements for DHCP Relay

### apply-secondary-as-giaddr

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | smart-relay-global;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit forwarding-options helpers bootp],<br>[edit forwarding-options helpers bootp <a href="#">interface</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.3 for QFX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | <p>Configures the interfaces on a switch that are DHCP relay agents to be enabled for smart DHCP relay:</p> <ul style="list-style-type: none"> <li>• When you configure this statement directly under the <b>bootp</b> statement, it enables smart relay on all the interfaces that are relay agents.</li> <li>• When you configure this statement under the <b>interface</b> statement, it enables smart relay on the specified interface.</li> </ul> <p>Smart relay requires the interfaces to be routed VLAN interfaces or Layer 3 logical interfaces that have multiple IP addresses.</p> |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring DHCP and BOOTP Relay on page 4331</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |



## bootp

---

**Syntax**    bootp {  
              client-response-ttl *number*;  
              description *text-description*;  
              apply-secondary-as-giaddr  
              interface (*interface-name* | *interface-group*) {  
                  broadcast *number*;  
                  client-response-ttl *number*;  
                  description *text-description*;  
                  maximum-hop-count *number*;  
                  minimum-wait-time *seconds*;  
                  no-listen;  
                  server *address* ;  
                  apply-secondary-as-giaddr  
              }  
              maximum-hop-count *number*;  
              minimum-wait-time *seconds*;  
              server *address* {  
              }  
              }  
              }

**Hierarchy Level**    [edit forwarding-options helpers]

**Release Information**    Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description**    Configure a router, switch, or interface to act as a Dynamic Host Configuration Protocol (DHCP) or bootstrap protocol (BOOTP) relay agent.

**Options**    The remaining statements are explained separately.

**Required Privilege Level**    interface—To view this statement in the configuration.  
                                  interface-control—To add this statement to the configuration.

**Related Documentation**    • [Configuring DHCP and BOOTP Relay on page 4331](#)



## broadcast

---

|                                 |                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>broadcast <i>number</i>;</code>                                                                                   |
| <b>Hierarchy Level</b>          | [edit forwarding-options helpers bootp <a href="#">interface</a> ( <i>interface-name</i>   <i>interface-group</i> )]    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.3 for QFX Series switches.                                                  |
| <b>Description</b>              | If the specified interface is unavailable, broadcast DHCP and BOOTP packets.                                            |
| <b>Options</b>                  | None                                                                                                                    |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring DHCP and BOOTP Relay on page 4331</a></li> </ul>       |

## client-response-ttl

---

|                                 |                                                                                                                                                                  |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>client-response-ttl <i>number</i>;</code>                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit forwarding-options helpers bootp],<br>[edit forwarding-options helpers bootp <a href="#">interface</a> ( <i>interface-name</i>   <i>interface-group</i> )] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.1.<br>Statement introduced in Junos OS Release 11.3 for QFX Series switches.                                          |
| <b>Description</b>              | Set the IP time-to-live (TTL) value in DHCP response packets sent to a DHCP client.                                                                              |
| <b>Options</b>                  | <i>number</i> —Decrement amount.<br><b>Default:</b> None                                                                                                         |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Routers, Switches, and Interfaces as DHCP and BOOTP Relay Agents</a></li> </ul>                 |



## description (Forwarding Options)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>description text-description;</code>                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit forwarding-options helpers bootp],<br>[edit forwarding-options helpers bootpinterface (interface-name   interface-group)],<br>[edit forwarding-options helpers domain],<br>[edit forwarding-options helpers domain interface interface-name],<br>[edit forwarding-options helpers tftp],<br>[edit forwarding-options helpers tftpinterface interface-name] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for QFX Series switches.                                                                                                                                                              |
| <b>Description</b>              | Describe a BOOTP, DHCP, Domain Name System (DNS), or Trivial File Transfer Protocol (TFTP) service, or an interface that is configured for the service.                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring DNS and TFTP Packet Forwarding</li><li>Configuring Routers, Switches, and Interfaces as DHCP and BOOTP Relay Agents</li></ul>                                                                                                                                                                                  |



## interface (BOOTP)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> interface (<i>interface-name</i>   <i>interface-group</i>) {   broadcast;   client-response-ttl <i>number</i>;   description <i>text-description</i>;   maximum-hop-count <i>number</i>;   minimum-wait-time <i>seconds</i>;   no-listen;   server <i>address</i> {     logical-system <i>logical-system-name</i> &lt;routing-instance [ &lt;default&gt;       <i>routing-instance-names</i> ]&gt;;     routing-instance [ &lt;default&gt; <i>routing-instance-names</i> ];   }   apply-secondary-as-giaddr (QFX platforms only) }</pre> |
| <b>Hierarchy Level</b>          | [edit forwarding-options helpers bootp]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for QFX Series switches.</p>                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Specify the interface for a DHCP and BOOTP relay agent.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <p><b><i>interface-group</i></b>—Sets a logical interface or group of logical interfaces with a specific DHCP relay configuration.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring Routers, Switches, and Interfaces as DHCP and BOOTP Relay Agents</li> <li><a href="#">Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 4204</a></li> </ul>                                                                                                                                                                                                                                                                |



## maximum-hop-count

---

|                                 |                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>maximum-hop-count <i>number</i>;</code>                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit forwarding-options helpers bootp],<br>[edit forwarding-options helpers bootp <code>interface</code> ( <i>interface-name</i>   <i>interface-group</i> )]                                       |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for QFX Series switches. |
| <b>Description</b>              | Specify the maximum number of hops allowed.                                                                                                                                                         |
| <b>Options</b>                  | <i>number</i> —Maximum number of hops.<br><b>Default:</b> 4 hops                                                                                                                                    |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring Routers, Switches, and Interfaces as DHCP and BOOTP Relay Agents</li></ul>                                                                        |

## minimum-wait-time

---

|                                 |                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>minimum-wait-time <i>seconds</i>;</code>                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit forwarding-options helpers bootp],<br>[edit forwarding-options helpers bootp <code>interface</code> ( <i>interface-name</i>   <i>interface-group</i> )]                                       |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for QFX Series switches. |
| <b>Description</b>              | Specify the minimum time allowed.                                                                                                                                                                   |
| <b>Options</b>                  | <i>seconds</i> —Minimum time.<br><b>Default:</b> 0 seconds                                                                                                                                          |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring Routers, Switches, and Interfaces as DHCP and BOOTP Relay Agents</li></ul>                                                                        |



## no-listen

|                                 |                                                                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-listen;                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit forwarding-options helpers bootp <b>interface</b> ( <i>interface-name</i>   <i>interface-group</i> )],<br>[edit forwarding-options helpers domain interface <i>interface-name</i> ],<br>[edit forwarding-options helpers tftp interface <i>interface-name</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for QFX Series switches.                                                                   |
| <b>Description</b>              | Disable recognition of DNS requests or stop packets from being forwarded on a logical interface, a group of logical interfaces, a router, or a switch.                                                                                                                |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring DNS and TFTP Packet Forwarding</li> <li>Configuring Routers, Switches, and Interfaces as DHCP and BOOTP Relay Agents</li> </ul>                                                                                    |

## server (DHCP and BOOTP Relay Agent)

|                                 |                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>server address {     logical-system <i>logical-system-name</i> &lt;routing-instance [ &lt;default&gt;         <i>routing-instance-names</i> ]&gt;;     routing-instance [ &lt;default&gt; <i>routing-instance-names</i> ]; }</pre>                                                                                                                |
| <b>Hierarchy Level</b>          | [edit forwarding-options helpers bootp],<br>[edit forwarding-options helpers bootp <b>interface</b> ( <i>interface-name</i>   <i>interface-group</i> )]                                                                                                                                                                                                |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for QFX Series switches.                                                                                                                                                    |
| <b>Description</b>              | Configure the router or switch to act as a DHCP and BOOTP relay agent.                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <ul style="list-style-type: none"> <li><b>address</b>—One or more addresses of the server.</li> <li><b>logical-system <i>logical-system-name</i></b>—(Optional) Logical system of the server.</li> <li><b>routing-instance <i>routing-instance-names</i></b>—(Optional) Routing instance name that belong to the DHCP or BOOTP relay agent.</li> </ul> |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring Routers, Switches, and Interfaces as DHCP and BOOTP Relay Agents</li> </ul>                                                                                                                                                                                                                         |







## CHAPTER 52

# Administration

- [Monitoring Commands for Port Mirroring on page 4371](#)

### Monitoring Commands for Port Mirroring

---



## show analyzer

|                                 |                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <b>show analyzer</b> < <i>analyzer-name</i> >                                                                                                                                    |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                  |
| <b>Description</b>              | Display information about port mirroring.                                                                                                                                        |
| <b>Options</b>                  | <i>analyzer-name</i> —(Optional) Displays the status of a specific analyzer (port-mirroring configuration).                                                                      |
| <b>Required Privilege Level</b> | view                                                                                                                                                                             |
| <b>List of Sample Output</b>    | <a href="#">show analyzer on page 4372</a>                                                                                                                                       |
| <b>Output Fields</b>            | <a href="#">Table 302 on page 4372</a> describes the output fields for the <b>show analyzer</b> command. Output fields are listed in the approximate order in which they appear. |

**Table 302: show analyzer Output Fields**

| Field Name                          | Field Description                                                                                                                 |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <b>Analyzer name</b>                | Name of the analyzer.                                                                                                             |
| <b>Output interface</b>             | Local interface to which mirror packets are sent. If you configure an output interface, you cannot also configure an output VLAN. |
| <b>Output VLAN</b>                  | VLAN to which mirror packets are sent. If you configure an output VLAN, you cannot also configure an output interface.            |
| <b>Egress monitored interfaces</b>  | Interfaces for which egress traffic is mirrored.                                                                                  |
| <b>Ingress monitored interfaces</b> | Interfaces for which ingress traffic is mirrored.                                                                                 |
| <b>Ingress monitored VLANs</b>      | VLANs for which ingress traffic is mirrored.                                                                                      |

## Sample Output

```

show analyzer
user@switch> show analyzer
Analyzer name       : employee-monitor
Output interface    : ge-0/0/10.0
Output VLAN         : remote-analyzer
Egress monitored interfaces : ge-0/0/7.0
Ingress monitored interfaces : ge-0/0/8.0
Ingress monitored interfaces : ge-0/0/9.0

```



# Troubleshooting

- [Troubleshooting Procedures on page 4373](#)

## Troubleshooting Procedures

---

- [Troubleshooting Port Mirroring on page 4373](#)

## Troubleshooting Port Mirroring

- [Port Mirroring Constraints and Limitations on page 4373](#)
- [Egress Port Mirroring with VLAN Translation on page 4375](#)

### Port Mirroring Constraints and Limitations

---

- [Local and Remote Port Mirroring on page 4373](#)
- [Remote Port Mirroring Only on page 4374](#)

#### ***Local and Remote Port Mirroring***

The following constraints and limitations apply to local and remote port mirroring with the QFX Series:

- You can create a total of four port-mirroring configurations on the QFX Series (standalone switches and QFabric systems), subject to the following limits:
  - There can be no more than two configurations that mirror ingress traffic.
  - There can be no more than two configurations that mirror egress traffic.
- You can configure no more than one type of output in one port-mirroring configuration. That is, you can use no more than one of the following to complete a **set analyzer name output** statement:
  - **interface**
  - **ip-address**
  - **vlan**
- If you configure Junos OS to mirror egress packets, do not configure more than 2000 VLANs on a QFX3500 device or QFabric system. If you do so, some VLAN packets might contain incorrect VLAN IDs. This applies to any VLAN packets—not only the mirrored copies.



- The **ratio** and **loss-priority** options are not supported.
- Packets with physical layer errors are filtered out and are not sent to the output port or VLAN.
- If you use sFlow monitoring to sample traffic, it does not sample the mirror copies when they exit from the output interface.
- You cannot mirror packets exiting or entering the following ports:
  - Dedicated Virtual Chassis interfaces
  - Management interfaces (me0 or vme0)
  - Fibre Channel interfaces
  - Routed VLAN interfaces
- Do not include an 802.1Q subinterface that has a unit number other than 0 in a port mirroring configuration. Port mirroring does not work with subinterfaces if their unit number is not 0. (You configure 802.1Q subinterfaces using the **vlan-tagging** statement.)
- When packet copies are sent out the output interface, they are not modified for any changes that are normally applied on egress, such as CoS rewriting.
- An interface can be the input interface for only one mirroring configuration. Do not use the same interface as the input interface for multiple mirroring configurations.
- (QFabric systems only) If you configure a QFabric analyzer to mirror egress traffic and the input and output interfaces are on different Node devices, the mirrored copies have incorrect VLAN IDs. This limitation does not apply if you configure a QFabric analyzer to mirror egress traffic and the input and output interfaces are on the *same* Node device. In this case the mirrored copies have the correct VLAN IDs (as long as you do not configure more than 2000 VLANs on the QFabric system).

#### ***Remote Port Mirroring Only***

The following constraints and limitations apply to remote port mirroring with the QFX Series:

- If you configure an output IP address, the address cannot be in the same subnetwork as any of the switch's management interfaces.
- If you create virtual routing instances and also create an analyzer configuration that includes an output IP address, the output address belongs to the default virtual routing instance (inet.0 routing table).
- An output VLAN cannot be a private VLAN or VLAN range.
- An output VLAN cannot be shared by multiple **analyzer** statements.
- An output VLAN interface cannot be a member of any other VLAN.
- An output VLAN interface cannot be an aggregated Ethernet interface.
- On the source (monitored) switch, only one interface can be a member of the analyzer VLAN.



### Egress Port Mirroring with VLAN Translation

**Problem** If you create a port-mirroring configuration that mirrors customer VLAN (CVLAN) traffic on egress and the traffic undergoes VLAN translation before being mirrored, the VLAN translation does not apply to the mirrored packets. That is, the mirrored packets retain the service VLAN (SVLAN) tag that should be replaced by the CVLAN tag on egress. The original packets are unaffected—on these packets VLAN translation works properly, and the SVLAN tag is replaced with the CVLAN tag on egress.

**Solution** This is expected behavior.

- Related Documentation**
- [Understanding Port Mirroring on page 4313](#)
  - [Example: Configuring Port Mirroring for Local Analysis on page 4319](#)
  - [Example: Configuring Port Mirroring for Remote Analysis on page 4324](#)







## PART 17

# Storage

- [Overview on page 4379](#)
- [Configuration on page 4495](#)
- [Administration on page 4665](#)
- [Troubleshooting on page 4795](#)







## CHAPTER 54

# Overview

- [Software Features Overview on page 4379](#)
- [Fibre Channel, FCoE, and FIP on page 4385](#)

### Software Features Overview

---

- [Overview of Fibre Channel on the QFX Series on page 4380](#)
- [Overview of FIP on page 4384](#)



## Overview of Fibre Channel on the QFX Series

Fibre Channel (FC) is a high-speed network technology that interconnects network elements and allows them to communicate with one another. The International Committee for Information Technology Standards (INCITS) T11 Technical Committee sets FC standards.

FC networks provide high-performance characteristics such as lossless transport combined with flexible network topology. FC is primarily used in storage area networks (SANs) because it provides reliable, lossless, in-order frame transport between initiators and targets. FC components include initiators, targets, and FC-capable switches that interconnect FC devices and may also interconnect FC devices with Fibre Channel over Ethernet (FCoE) devices. Initiators originate I/O commands. Targets receive I/O commands. For example, a server can initiate an I/O request to a storage device target.

Juniper Networks QFX Series can function as an FCoE-FC gateway or as an FCoE transit switch.

FCoE transports native FC frames over an Ethernet network by encapsulating the unmodified frames in Ethernet. It also provides protocol extensions to discover FCoE devices through the Ethernet network. FCoE requires that the Ethernet network support data center bridging (DCB) extensions that ensure lossless transport and allow the Layer 2 Ethernet domain to meet the requirements of FC transport.

The FCoE-FC gateway functionality is a licensed feature on the QFX Series. As an FCoE-FC gateway, the switch connects FCoE devices on an Ethernet network to a SAN FC switch.

You do not need a license to use the switch as an FCoE transit switch. As an FCoE transit switch, the switch:

- Is a Layer 2 data center bridging (DCB) switch that can transport FCoE frames.
- Implements FCoE Initialization Protocol (FIP) snooping.
- Connects multiple FCoE endpoints to the FC network.



**NOTE:** The QFX3600 device does not support FC or FCoE features.

---

This topic describes:

- [Fibre Channel Transport Protocol on page 4380](#)
- [How FC Works on the QFX Series on page 4381](#)
- [Supported FC Features and Functions on page 4383](#)
- [Lossless Transport Support on page 4383](#)

### Fibre Channel Transport Protocol

---

The Fibre Channel Protocol is a transport protocol that consists of five layers as shown in [Table 303 on page 4381](#):



Table 303: Fibre Channel Protocol Layers

| FC Protocol Layer | Description                                |
|-------------------|--------------------------------------------|
| FC-0              | Physical (cabling, connectors, and so on)  |
| FC-1              | Data link layer                            |
| FC-2              | Network layer (defines the main protocols) |
| FC-3              | Common services                            |
| FC-4              | Protocol mapping                           |

The FC protocol layers are generally split into three groups:

- FC-0 and FC-1 are the physical layers.
- FC-2 is the protocol layer, similar to OSI Layer 3.
- FC-3 and FC-4 are the services layers.

The FCoE-FC gateway operates the physical layers and the protocol layer, and provides FIP and service redirection at the services layer.

#### How FC Works on the QFX Series

The switch connects devices that support FC and Ethernet (such as FCoE servers on an Ethernet network) to an FC SAN, thus converging the Ethernet and FC networks on a single physical network infrastructure. The switch provides the class-of-service (CoS) features needed to handle the different types of traffic appropriately.

To converge FC and Ethernet networks, you can configure the switch as an:

- [FCoE-FC Gateway on page 4381](#)
- [FCoE Transit Switch on page 4382](#)
- [FCoE VLANs on page 4382](#)

#### **FCoE-FC Gateway**

When the switch functions as an FCoE-FC gateway, the switch aggregates FCoE traffic and performs the encapsulation and de-encapsulation of native FC frames in Ethernet as it transports the frames between FCoE devices in the Ethernet network and the FC switch. In effect, the switch translates Ethernet to FC and FC to Ethernet.

The gateway receives FC frames encapsulated in Ethernet from FCoE devices through an FCoE VLAN interface composed of one or more 10-Gigabit Ethernet interfaces. The gateway removes the Ethernet encapsulation from the FC frames, and then sends the native FC frames to the FC switch through a native FC interface.

The gateway receives native FC frames from the FC switch on the gateway's native FC interfaces. The gateway encapsulates the native FC frames in Ethernet, and then sends the encapsulated frames to the appropriate FCoE device through the FCoE VLAN interface.



To FCoE devices, the gateway behaves like an FC switch and can present multiple virtual F\_Ports (VF\_Ports) on a single interface. To an FC switch, the gateway behaves like an FC node that is doing N\_Port ID virtualization (NPIV).

### **FCoE Transit Switch**

When the switch functions as an FCoE transit switch, it forwards traffic (including FCoE traffic) based on Layer 2 media access control (MAC) forwarding and is a normal DCB-enabled Layer 2 switch that also performs FIP snooping. The switch aggregates FCoE traffic and passes it through to an FCF. The switch does not remove the Ethernet encapsulation from the FC frames, but it does preserve the class of service (CoS) required to transport FC frames.

The switch inspects (snoops) FIP information in order to create filters that permit only valid FCoE traffic to flow through the switch between FCoE devices and the FCF. The switch does not use native FC ports because the FC frames are encapsulated in Ethernet when they flow between the FCoE devices and the FCF. Virtual point-to-point links between each FCoE device and the FCF pass transparently through the switch, so the switch is not seen as a terminating point or an intermediate point by FCoE devices or by the FCF.

### **FCoE VLANs**

On the QFX Series, all FCoE traffic must travel in a VLAN dedicated to transporting only FCoE traffic. Only FCoE interfaces should be members of an FCoE VLAN. Ethernet traffic that is not FCoE or FIP traffic must travel in a different VLAN.



**NOTE:** On a QFX3500 or QFabric system Node device, the same VLAN cannot be used in both transit switch mode and FCoE-FC gateway mode.

---



**NOTE:** FCoE VLANs (any VLAN that carries FCoE traffic) support only Spanning Tree Protocol (STP) and link aggregation group (LAG) Layer 2 features. IGMP snooping is enabled by default on all VLANs; be sure to disable IGMP snooping on FCoE VLANs.

---

You can configure more than one FCoE VLAN, but any given virtual link must be in only one FCoE VLAN.



**NOTE:** All 10-Gigabit Ethernet interfaces that connect to FCoE devices must have a native VLAN configured in order to transport FIP traffic, because FIP VLAN discovery and notification frames are exchanged as untagged packets.

---



**BEST PRACTICE:** Only FCoE traffic is permitted on the FCoE VLAN. A native VLAN might need to carry untagged traffic of different types and protocols.



Therefore, it is a good practice to keep the native VLAN separate from FCoE VLANs.

---

### Supported FC Features and Functions

---

QFX Series supports the following features and functionality:

- As an FCoE-FC gateway:
  - DCB, including Data Center Bridging Capability Exchange protocol (DCBX), priority-based flow control (PFC), enhanced transmission service (ETS), and 10-Gigabit Ethernet interfaces
  - FCoE Initialization Protocol (FIP)
  - Proxy for FCoE devices when communicating with FC switches and acts as a proxy for FC switches when communicating with FCoE devices
  - Up to 12 native FC interfaces per QFX3500 switch (each interface can be configured as a 2-Gigabit, 4-Gigabit, or 8-Gigabit Ethernet interface)
- As an FCoE transit switch:
  - DCB functions
  - FIP snooping
  - Transparent Layer 2 MAC forwarding of FCoE frames

### Lossless Transport Support

---

The QFX Series supports up to six lossless forwarding classes. For lossless transport, you must enable PFC on the IEEE 802.1p code point of lossless forwarding classes. The following limitations apply to support lossless transport:

- The external cable length from the QFX3500 or QFabric system Node device to other devices cannot exceed 300 meters.
- The internal cable length from the QFabric system Node device to the QFabric system Interconnect device cannot exceed 150 meters.
- For FCoE traffic, the interface maximum transmission unit (MTU) must be at least 2180 bytes to accommodate the packet payload, headers, and checks.

#### Related Documentation

- [Understanding Fibre Channel on page 4385](#)
- [Understanding an FCoE-FC Gateway on page 4399](#)
- [Understanding FCoE Transit Switch Functionality on page 4396](#)
- [Understanding FCoE on page 4392](#)
- [Understanding DCB Features and Requirements on page 4389](#)
- [Overview of FIP on page 4384](#)



- [Understanding VN\\_Port to VF\\_Port FIP Snooping on an FCoE Transit Switch on page 4448](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)
- [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)
- [Understanding Fibre Channel Terminology on page 4483](#)

## Overview of FIP

Fibre Channel over Ethernet (FCoE) Initialization Protocol (FIP) is a Layer 2 protocol that establishes and maintains Fibre Channel (FC) virtual links between pairs of FCoE devices such as server FCoE Nodes (ENodes) and FC switches. FIP can also establish and maintain virtual links between FCoE devices and an FCoE-FC gateway such as the QFX Series, where the gateway acts on behalf of the FC switch.

FIP enables FCoE devices to discover one another and to initialize and maintain virtual links over a physical Ethernet network. This allows FCoE devices in the Ethernet network to access storage devices in the FC storage area network (SAN).

FIP solves the problem presented by the FC requirement for point-to-point connections (FC does not permit point-to-multipoint connections) by creating a unique virtual link for each connection between an ENode VN\_Port and an FC switch VF\_Port. Multiple virtual links can use a single physical link and virtual links can traverse Ethernet transit (passthrough) switches while appearing to be direct point-to-point connections to the FC switch.

FIP has its own EtherType (0x8914) to distinguish its traffic from payload-carrying FCoE traffic and other Ethernet traffic. FIP operations occur on a per-VLAN basis.

For more details about FIP, see the Technical Committee T11 organization document *Fibre Channel Backbone - 5 (FC-BB-5) Rev 2.00* available at <http://www.t11.org/ftp/t11/pub/fc/bb-5/09-056v5.pdf>.

### Related Documentation

- [Overview of Fibre Channel on the QFX Series on page 4380](#)
- [Understanding Fibre Channel on page 4385](#)
- [Understanding FIP Functions on page 4408](#)
- [Understanding FIP Implementation on page 4412](#)
- [Understanding FIP Parameters on an FCoE-FC Gateway on page 4416](#)
- [Understanding Fibre Channel Virtual Links on page 4419](#)
- [Understanding FCoE on page 4392](#)
- [Understanding an FCoE-FC Gateway on page 4399](#)
- [Configuring FIP on an FCoE-FC Gateway on page 4589](#)
- [Understanding Fibre Channel Terminology on page 4483](#)



---

## Fibre Channel, FCoE, and FIP

---

- [Understanding Fibre Channel on page 4385](#)
- [Understanding DCB Features and Requirements on page 4389](#)
- [Understanding FCoE on page 4392](#)
- [Understanding FCoE Transit Switch Functionality on page 4396](#)
- [Understanding an FCoE-FC Gateway on page 4399](#)
- [Understanding FCoE-FC Gateway Functions on page 4403](#)
- [Understanding FCoE and FIP Session High Availability on page 4405](#)
- [Understanding FIP Functions on page 4408](#)
- [Understanding FIP Implementation on page 4412](#)
- [Understanding FIP Parameters on an FCoE-FC Gateway on page 4416](#)
- [Understanding Fibre Channel Virtual Links on page 4419](#)
- [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)
- [Understanding Load Balancing in an FCoE-FC Gateway Proxy Fabric on page 4431](#)
- [Understanding OxID Hash Control for FCoE Traffic Load Balancing on page 4447](#)
- [Understanding VN\\_Port to VF\\_Port FIP Snooping on an FCoE Transit Switch on page 4448](#)
- [Understanding VN\\_Port to VN\\_Port FIP Snooping on an FCoE Transit Switch on page 4454](#)
- [Understanding MC-LAGs on an FCoE Transit Switch on page 4459](#)
- [Understanding DCBX on page 4463](#)
- [Understanding DCBX Application Protocol TLV Exchange on page 4472](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)
- [Understanding Fibre Channel Terminology on page 4483](#)

### Understanding Fibre Channel

Fibre Channel (FC) is a serial I/O interconnect network technology capable of supporting multiple protocols. It is used primarily for storage area networks (SANs). The committee standardizing FC is the International Committee for Information Technology Standards (INCITS).

When configured as a Fibre Channel over Ethernet (FCoE)-FC gateway, the QFX Series supports the transport of native FC traffic between FC switches and the gateway's native FC interfaces.

FC concepts include:

- [FC Fabrics on page 4386](#)
- [FC Port Types on page 4386](#)
- [FC Switches on page 4386](#)
- [Adapters on page 4387](#)



- [N\\_Port ID Virtualization \(NPIV\) on page 4387](#)
- [FC Services on page 4387](#)

---

## FC Fabrics

An FC fabric is a switched network topology that interconnects FC devices using FC switches, usually to create a SAN. An FC switch is a Layer 3 network switch that is compatible with the FC protocol, forwards FC traffic, and provides FC services to the components of the FC fabric. FC devices are usually servers or storage devices such as disk arrays.

Switches called FCoE forwarders (FCFs) perform a subset of FC switch functions. An FCF is a Layer 3 network switch that is compatible with the FC protocol and forwards FC traffic, but does not provide network services.

When configured as an FCoE-FC gateway, the QFX Series acts as a proxy for the FCF functionality of an FC switch. The gateway provides FCoE devices on the Ethernet network access to the FC network without requiring the FC switches in the SAN to support Ethernet interfaces. The gateway is not an FCF and does not provide FC services.

FC network design often uses two fabrics (dual-rail topology) for redundancy. The two fabrics connect to edge devices but are otherwise unconnected, so that if one fabric goes down, the other fabric can continue to provide connectivity.

---

## FC Port Types

The QFX Series supports the following FC port types:

- **N\_Port**—An N\_Port is a port on the node of an FC device such as a server or a storage device and is also known as a node port.
- **F\_Port**—An F\_Port is a port on an FC switch that connects to an FC device N\_Port in a point-to-point connection. F\_Ports are also known as fabric ports.

These port types are a subset of the existing FC port types that can be supported in an FC fabric.

---

## FC Switches

FC switches provide FC services to the FC network. FC switches forward Layer 3 traffic. They may transport a combination of native FC traffic and other traffic, such as Internet Small Computer Systems Interface (iSCSI) or FCoE, or they may transport only native FC traffic. When an FC switch supports FCoE, it combines FCoE termination functions with the FC stack on an FC switching element. This is also known as a dual-stack switch.

When FC switches support FCoE, they present virtual FC interfaces in the form of virtual F\_Ports (VF\_Ports) to the FCoE nodes (ENodes) on FCoE devices. A VF\_Port is an endpoint in a virtual point-to-point connection with an ENode virtual N\_Port (VN\_Port). A VF\_Port emulates a native FC F\_Port and performs similar functions. A VF\_Port is an intermediate port in a connection between an FCoE device such as a server in the Ethernet network and a storage device in the FC SAN.



FC switches that support FCoE contain at least one lossless Ethernet media access controller (MAC) paired with an FCoE controller. The lossless Ethernet MAC implements Ethernet extensions to avoid frame loss due to congestion. The FCoE controller instantiates and terminates virtual port instances as they are needed. Each VF\_Port instance has one unique virtual link to an ENode VN\_Port.

FCoE support also requires one FCoE Link End Point (LEP) for each VF\_Port connection. An FCoE LEP is a virtual FC interface mapped onto the physical Ethernet interface. It transmits and receives FCoE frames on the virtual link, and handles FC frame encapsulation for traffic going from the FC switch to the FCoE device and frame de-encapsulation of traffic received from the FCoE device.

When you configure the QFX Series as an FCoE-FC gateway, the gateway performs these FC-to-Ethernet and Ethernet-to-FC conversion functions so that the FC switch does not need Ethernet (FCoE) ports.

---

### Adapters

FC host bus adapters (HBAs) in FC switches and devices perform functions similar to those of Ethernet adapters in Ethernet switches and devices. Switches that perform FCoE functions and FCoE devices have converged network adapters (CNAs) that support both native FC and Ethernet functionality.

---

### N\_Port ID Virtualization (NPIV)

FC requires a unique point-to-point link between the FC switch (F\_Port) and each host N\_Port. In order to avoid using one physical link for each F\_Port to N\_Port connection, the port connections must be virtualized so that they can share a physical link while maintaining logical separation.

FC accomplishes this by enabling you to create an independent virtual link for each FC session by mapping each session to a virtualized N\_Port. This process is called N\_Port ID virtualization (NPIV).

NPIV makes each virtual link look like a dedicated point-to-point link. In this way, multiple FC devices and multiple applications or virtual machines (VMs) on a single FC device can connect to an FC switch using one physical port instead of using a physical port for each connection. The virtual link creates a secure boundary between traffic from different sources on a single physical connection.

NPIV works by creating a unique virtual port identifier for each logical connection on a physical port. Conceptually, this is similar to splitting a single physical interface into multiple logical interfaces or subinterfaces. A virtual port identifier consists of the port's unique worldwide name (WWN) combined with a Fibre Channel ID (FCID) that the FC switch assigns to the virtual connection. This creates a virtual host bus adapter (HBA) for each virtual link that uniquely identifies the link to the FC switch.

---

### FC Services

When you configure the QFX Series as an FCoE-FC gateway, the gateway connects FCoE devices in the Ethernet network to the FC fabric. The gateway does not provide FC services



directly. The gateway logs in to the FC fabric and obtains FC services from the FC fabric, including:

- Management servers
  - Zone server—Defines which devices can connect to each other in the FC fabric.
  - Fabric configuration server—Discovers FC fabric topology and attributes.
  - Policy server—Distributes the rules for administering, managing, and controlling access to FC fabric resources.
  - HBA management server—Registers HBA information with the FC fabric.
- Domain manager—Allocates domain IDs to virtual switches.
- Fabric login server—Provides login services to the gateway so that the native FC ports on the gateway can perform initial fabric login (FLOGI) to the FC fabric and subsequent fabric discovery (FDISC) logins for the physical and virtual ports on the FCoE devices in the Ethernet network. This includes allocating Fibre Channel IDs (FCIDs) to ports.
- Name server—Discovers, registers, and unregisters N\_Port attributes, including the attributes of the native FC ports on the gateway that connect to the FC fabric.
- Event server—Validates incoming events to ensure transaction integrity.
- Time server—Maintains a common time for devices in the FC fabric.
- Fabric controller
  - Fabric Shortest Path First (FSPF)—The FC fabric provides link-state path selection to the gateway.
  - State change notification (SCN) / registered state change notification server (RSCN)—Notifies the appropriate nodes when new devices come online, when other nodes fail, or when changes on an online node affect system operation.

**Related  
Documentation**

- [Overview of Fibre Channel on the QFX Series on page 4380](#)
- [Understanding FCoE on page 4392](#)
- [Understanding an FCoE-FC Gateway on page 4399](#)
- [Understanding Fibre Channel Terminology on page 4483](#)



## Understanding DCB Features and Requirements

Data center bridging (DCB) is a set of enhancements to the IEEE 802.1 bridge specifications. DCB modifies and extends Ethernet behavior to support I/O convergence in the data center. I/O convergence includes but is not limited to the transport of Ethernet LAN traffic and Fibre Channel (FC) storage area network (SAN) traffic on the same physical Ethernet network infrastructure.

A converged architecture saves cost by reducing the number of networks and switches required to support both types of traffic, reducing the number of interfaces required, reducing cable complexity, and reducing administration activities.

The Juniper Networks QFX Series supports the DCB features required to transport converged Ethernet and FC traffic while providing the class-of-service (CoS) and other characteristics FC requires for transmitting storage traffic. To accommodate FC traffic, DCB specifications provide:

- A flow control mechanism called priority-based flow control (PFC, described in IEEE 802.1Qbb) to help provide lossless transport.
- A discovery and exchange protocol for conveying configuration and capabilities among neighbors to ensure consistent configuration across the network, called Data Center Bridging Capability Exchange protocol (DCBX), which is an extension of Link Layer Data Protocol (LLDP, described in IEEE 802.1AB).
- A bandwidth management mechanism called enhanced transmission selection (ETS, described in IEEE 802.1Qaz).
- A congestion management mechanism called quantized congestion notification (QCN, described in IEEE 802.1Qau).

The switch supports the PFC, DCBX, and ETS standards but does not support QCN. The switch also provides the high-bandwidth interfaces (10-Gbps minimum) required to support DCB and converged traffic.

This topic describes the DCB standards and requirements the switch supports:

- [Lossless Transport on page 4389](#)
- [ETS on page 4390](#)
- [DCBX on page 4391](#)

### Lossless Transport

FC traffic requires lossless transport (defined as no frames dropped because of congestion). Standard Ethernet does not support lossless transport, but the DCB extensions to Ethernet along with proper buffer management enable an Ethernet network to provide the level of class of service (CoS) necessary to transport FC frames encapsulated in Ethernet over an Ethernet network.



This section describes these factors in creating lossless transport over Ethernet:

- [PFC on page 4390](#)
- [Buffer Management on page 4390](#)
- [Physical Interfaces on page 4390](#)

### **PFC**

PFC is a link-level flow control mechanism similar to Ethernet PAUSE (described in IEEE 802.3x). Ethernet PAUSE stops all traffic on a link for a period of time. PFC enables you to divide traffic on a link into eight priorities and stop the traffic of a selected priority without stopping the traffic assigned to other priorities on the link.

Pausing the traffic of a selected priority enables you to provide lossless transport for traffic assigned that priority and at the same time use standard lossy Ethernet transport for the rest of the link traffic.

### **Buffer Management**

Buffer management is critical to the proper functioning of PFC, because if buffers are allowed to overflow, frames are dropped and transport is not lossless.

For each lossless flow priority, the switch requires sufficient buffer space to:

- Store frames sent during the time it takes to send the PFC pause frame across the cable between devices.
- Store the frames that are already on the wire when the sender receives the PFC pause frame.

The propagation delay due to cable length and speed, as well as processing speed, determines the amount of buffer space needed to prevent frame loss due to congestion.

The switch automatically sets the threshold for sending PFC pause frames to accommodate delay from cables as long as 150 meters (492 feet) and to accommodate large frames that might be on the wire when the switch sends the pause frame. This ensures that the switch sends pause frames early enough to allow the sender to stop transmitting before the receive buffers on the switch overflow.

### **Physical Interfaces**

The switch supports 10-Gbps, full-duplex interfaces. The switch enables DCB capability only on 10-Gbps (or faster) Ethernet interfaces.

### **ETS**

---

PFC divides traffic into up to eight separate streams (priorities, configured on the switch as forwarding classes) on a physical link. ETS enables you to manage the link bandwidth by:

- Grouping the priorities into priority groups (configured on the switch as forwarding class sets).
- Specifying the bandwidth available to each of the priority groups as a percentage of the total available link bandwidth.



- Allocating the bandwidth to the individual priorities in the priority group.

The available link bandwidth is the bandwidth remaining after servicing strict priority flows.

Managing link bandwidth with ETS provides several advantages:

- There is uniform management of all types of traffic on the link, both congestion-managed traffic and standard Ethernet traffic.
- When a priority group does not use all of its allocated bandwidth, other priority groups on the link can use that bandwidth as needed.

When a priority in a priority group does not use all of its allocated bandwidth, other priorities in the group can use that bandwidth.

The result is better bandwidth utilization, because priorities that consist of bursty traffic can share bandwidth during periods of low traffic transmission instead of consuming their entire bandwidth allocation when traffic loads are light.

- You can assign traffic types with different service needs to different priorities so that each traffic type receives appropriate treatment.
- Strict priority traffic retains its allocated bandwidth.

## DCBX

DCB devices use DCBX to exchange configuration information with directly connected peers (switches and endpoints such as servers). DCBX is an extension of LLDP. If you disable LLDP on an interface, that interface cannot run DCBX. If you attempt to enable DCBX on an interface on which LLDP is disabled, the configuration commit fails.

DCBX can:

- Discover the DCB capabilities of peers.
- Detect DCB feature misconfiguration or mismatches between peers.
- Configure DCB features on peers.

You can configure DCBX operation for PFC, ETS, and for Layer 2 and Layer 4 applications such as FCoE and iSCSI. DCBX is enabled or disabled on a per-interface basis.

### Related Documentation

- [Overview of Fibre Channel on the QFX Series on page 4380](#)
- [Understanding FCoE on page 4392](#)
- [Understanding CoS Hierarchical Port Scheduling \(ETS\) on page 4872](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)
- [Understanding DCBX on page 4463](#)
- [Understanding Fibre Channel Terminology on page 4483](#)
- [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)



## Understanding FCoE

Fibre Channel over Ethernet (FCoE) is a method of supporting converged Fibre Channel (FC) and Ethernet traffic on a data center bridging (DCB) network. FCoE encapsulates unmodified FC frames in Ethernet to transport the FC frames over a physical Ethernet network. The T11 Technical Committee, which is the International Committee for Information Technology Standards (INCITS) committee responsible for FC interfaces, developed the FCoE standard to provide a method for transporting FC frames over a DCB network. The T11 document *Fibre Channel Backbone - 5 (FC-BB-5) Rev 2.00* at <http://www.t11.org/ftp/t11/pub/fc/bb-5/09-056v5.pdf> provides details about the FCoE version 1 standard.



**NOTE:** The switch does not support T11 Annex F *FCoE Pre-FIP Virtual Link Instantiation Protocol*.

To the Ethernet network, an FCoE frame is the same as any other Ethernet frame because the Ethernet encapsulation provides the header information needed to forward the frames. However, to achieve the lossless behavior that FC transport requires, the Ethernet network must conform to DCB standards.

DCB standards create an environment over which FCoE can transport native FC traffic encapsulated in Ethernet while preserving the mandatory class of service (CoS) and other characteristics that FC traffic requires.

Supporting FCoE in a DCB network requires that the FCoE devices in the Ethernet network and the FC switches at the edge of the SAN network handle both Ethernet and native FC traffic. To handle Ethernet traffic, an FC switch does one of two things:

- Incorporates FCoE interfaces.
- Uses an FCoE-FC gateway such as a QFX Series to de-encapsulate FCoE traffic from FCoE devices into native FC and to encapsulate native FC traffic from the FC switch into FCoE and forward it to FCoE devices through the Ethernet network.

FCoE concepts include:

- [FCoE Devices on page 4392](#)
- [FCoE Frames on page 4394](#)
- [Virtual Links on page 4394](#)
- [FCoE VLANs on page 4395](#)

---

### FCoE Devices

Each FCoE device has a converged network adapter (CNA) that combines the functions of an FC host bus adapter (HBA) and a lossless Ethernet network interface card (NIC) with 10-Gbps Ethernet ports. The portion of the CNA that handles FCoE traffic is called an FCoE Node (ENode). An ENode combines FCoE termination functions and the client part of the FC stack on the CNA.



ENodes present virtual FC interfaces to FC switches in the form of virtual N\_Ports (VN\_Ports). A VN\_Port is an endpoint in a virtual point-to-point connection called a virtual link. The other endpoint of the virtual link is an FC switch (or FCF) port. A VN\_Port emulates a native FC N\_Port and performs similar functions: handling the creation, detection, and flow of messages to and from the FC switch. A single ENode can host multiple VN\_Ports. Each VN\_Port has a separate, unique virtual link with a FC switch.

ENodes contain at least one lossless Ethernet media access controller (MAC). Each Ethernet MAC is paired with an FCoE controller. The lossless Ethernet MAC is a full-duplex Ethernet MAC that implements Ethernet extensions to avoid frame loss due to congestion and supports frames of at least 2500 bytes. The FCoE controller instantiates and terminates VN\_Port instances dynamically as they are needed for FCoE sessions. Each VN\_Port instance has a unique virtual link to an FC switch.



**NOTE:** A *session* is a fabric login (FLOGI) or fabric discovery (FDISC) login to the FC SAN fabric. Session does not refer to end-to-end server-to-storage sessions.


ENodes also contain one FCoE link end point (LEP) for each VN\_Port connection. An FCoE LEP is a virtual FC interface mapped onto the physical Ethernet interface.

An FCoE LEP:

- Transmits and receives FCoE frames on the virtual link.
- Handles FC frame encapsulation for traffic going from the server to the FC switch.
- Performs frame de-encapsulation of traffic received from the FC switch.

Figure 162 on page 4393 shows a block diagram of the major ENode components.

**Figure 162: ENode Components**

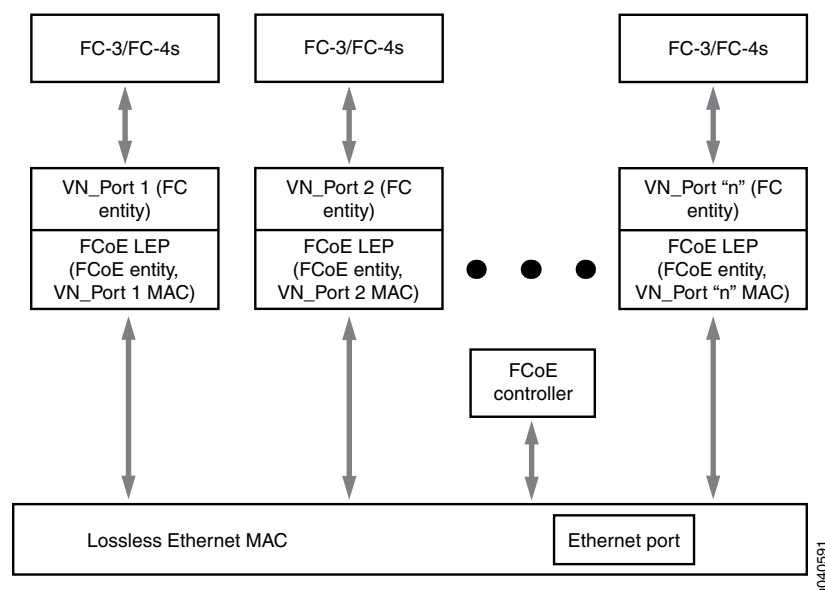



## FCoE Frames

---

The FCoE protocol specification replaces the FC0 and FC1 layers of the FC stack with Ethernet, but retains the FC frame header. Retaining the FC frame header enables the FC frame to pass directly to a native FC SAN after de-encapsulation. The FCoE header carries the FC start of file (SOF) bits and end of file (EOF) bits in an encoded format. FCoE supports two frame types, control frames and data frames. FCoE Initialization Protocol (FIP) carries all of the discovery and fabric login frames.

FIP control frames handle FCoE device discovery, initializing communication, and maintaining communication. They do not carry a data payload. FIP has its own EtherType (0x8914) to distinguish FIP traffic from FCoE traffic and other Ethernet traffic. To establish communication, the ENode uses the globally unique MAC address assigned to it by the CNA manufacturer.

After FIP establishes a connection between FCoE devices, the FCoE data frames handle the transport of the FC frames encapsulated in Ethernet. FCoE also has its own EtherType (0x8906) to distinguish FCoE frames from other Ethernet traffic and ensure the in-order frame handling that FC requires. FCoE frames include:

- 2112 bytes FC payload
- 24 bytes FC header
- 14 bytes standard Ethernet header
- 14 bytes FCoE header
- 8 bytes cyclic redundancy check (CRC) plus EOF
- 4 bytes VLAN header
- 4 bytes frame check sequence (FCS)

The payload, headers, and checks add up to 2180 bytes. Therefore, interfaces that carry FCoE traffic should have a configured maximum transmission unit (MTU) of 2180 or larger. An MTU size of 2180 bytes is the minimum size; some network administrators prefer an MTU of 2240 or 2500 bytes.

## Virtual Links

---

Native FC uses point-to-point physical links between FC devices. In FCoE, virtual links replace the physical links. A virtual link emulates a point-to-point link between two FCoE device endpoints, such as a server VN\_Port and an FC switch (or FCF) VF\_Port.

Each FCoE interface can support multiple virtual links. The MAC addresses of the FCoE endpoints (the VN\_Port and the VF\_Port) uniquely identify each virtual link and allow traffic for multiple virtual links to share the same physical link while maintaining data separation and security.

A virtual link exists in one FCoE VLAN and cannot belong to more than one VLAN. Although the FC switch and the FCoE device detect a virtual link as a point-to-point connection, virtual links do not need to be direct connections between a VF\_Port and a VN\_Port. A virtual link can traverse one or more transit switches, also known as passthrough switches.



A transit switch can transparently aggregate virtual links while still appearing and functioning as a point-to-point connection to the FCoE devices. However, a virtual link must remain within a single Layer 2 domain.

### FCoE VLANs

On the QFX Series, all FCoE traffic must travel in a VLAN dedicated to transporting only FCoE traffic. Only FCoE interfaces should be members of an FCoE VLAN. Ethernet traffic that is not FCoE or FIP traffic must travel in a different VLAN.



**NOTE:** On a QFX3500 or QFabric system Node device, the same VLAN cannot be used in both transit switch mode and FCoE-FC gateway mode.



**NOTE:** FCoE VLANs (any VLAN that carries FCoE traffic) support only Spanning Tree Protocol (STP) and link aggregation group (LAG) Layer 2 features. IGMP snooping is enabled by default on all VLANs; be sure to disable IGMP snooping on FCoE VLANs.

You can configure more than one FCoE VLAN, but any given virtual link must be in only one FCoE VLAN.



**NOTE:** All 10-Gigabit Ethernet interfaces that connect to FCoE devices must have a native VLAN configured in order to transport FIP traffic, because FIP VLAN discovery and notification frames are exchanged as untagged packets.



**BEST PRACTICE:** Only FCoE traffic is permitted on the FCoE VLAN. A native VLAN might need to carry untagged traffic of different types and protocols. Therefore, it is a good practice to keep the native VLAN separate from FCoE VLANs.

#### Related Documentation

- [Overview of Fibre Channel on the QFX Series on page 4380](#)
- [Understanding Fibre Channel on page 4385](#)
- [Understanding DCB Features and Requirements on page 4389](#)
- [Understanding FCoE Transit Switch Functionality on page 4396](#)
- [Understanding VN\\_Port to VF\\_Port FIP Snooping on an FCoE Transit Switch on page 4448](#)
- [Understanding Fibre Channel Terminology on page 4483](#)
- [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)



## Understanding FCoE Transit Switch Functionality

You can use the QFX Series as a Fibre Channel over Ethernet (FCoE) transit switch. An FCoE transit switch is a Layer 2 data center bridging (DCB) switch that can transport FCoE frames and implements FCoE Initialization Protocol (FIP) snooping. A DCB switch transports both FCoE and Ethernet LAN traffic over the same network infrastructure while preserving the class of service (CoS) that Fibre Channel (FC) traffic requires.

An FCoE transit switch does not encapsulate or de-encapsulate FC frames in Ethernet. It is an access switch that transports FC frames that have already been encapsulated in Ethernet between FCoE initiators such as servers and a storage area network (SAN) FC switch that supports both Ethernet and native FC traffic on its interfaces. The transit switch acts as a passthrough switch and is transparent to the FC switch, which detects each connection to an FCoE device as a direct point-to-point link.

When a QFX Series acts as a transit switch, the VLANs you configure for FCoE traffic can use any of the switch ports on the device (QFX3500 switch or QFabric system Node device) because the traffic in both directions is standard Ethernet traffic, not native FC traffic.



**NOTE:** The Ethernet interfaces that connect to FCoE devices must include a native VLAN to transport FIP traffic, because FIP VLAN discovery and notification frames are exchanged as untagged packets. It is a good practice to keep the native VLAN separate from the VLANs that carry FCoE traffic. FCoE VLANs should carry only FCoE traffic, but other types of untagged traffic might use the native VLAN.

FCoE traffic should use a VLAN dedicated only to FCoE traffic. Do not mix FCoE traffic with standard Ethernet traffic on a VLAN on the switch.



**NOTE:** FCoE VLANs (any VLAN that carries FCoE traffic) support only Spanning Tree Protocol (STP) and link aggregation group (LAG) Layer 2 features. IGMP snooping is enabled by default on all VLANs; be sure to disable IGMP snooping on FCoE VLANs.



**NOTE:** On a QFX3500 switch or on a QFabric system Node device, the same VLAN cannot be used in both transit switch mode and FCoE-FC gateway mode. If you configure both a transit switch and an FCoE-FC gateway on the same QFX3500 switch or QFabric system Node device, configure different FCoE VLANs for the transit switch and the FCoE-FC gateway.

Transit switch architecture differs from FCoE-FC gateway architecture. As an FCoE-FC gateway, the system transports traffic to the FC SAN as native FC frames, and the VLAN must use an FCoE VLAN interface and native FC interfaces to transport that traffic. As a transit switch, the system forwards Ethernet traffic, and requires DCB configuration for



lossless transport of that traffic and FIP snooping at FCoE device access ports, but not the FCoE-FC gateway features necessary for transporting FC traffic.

The QFX Series complies with DCB standards for ensuring lossless transport and low latency, and provides 10-Gbps ports for FCoE traffic. For lossless transport to function correctly, you must use priority-based flow control (PFC, described in IEEE 802.1Qbb) to create bandwidth reservations and ensure proper CoS for FCoE traffic.


FIP snooping adds security by filtering access so that only traffic from servers that have successfully logged in to the FC network passes through the transit switch and reaches the FC network. The Technical Committee T11 organization specifications describe two types of FIP snooping:

- The FC-BB-5 specification describes VN\_Port to VF\_Port (VN2VF\_Port) FIP snooping, which provides security for communication between FCoE device VN\_Ports on the Ethernet network and FCF or FC switch VF\_Ports.
- The FC-BB-6 specification describes VN\_Port to VN\_Port (VN2VN\_Port) FIP snooping, which provides security for communication between FCoE device VN\_Ports on the Ethernet network.

To accommodate the larger size of Ethernet-encapsulated frames, FCoE interfaces should be configured with a maximum transmission unit (MTU) size of at least 2180 bytes.

The transit switch transparently connects FCoE-capable devices such as servers in an Ethernet LAN to an FC switch or to a gateway switch (hereafter referred to as the FC switch), as shown in [Figure 163 on page 4397](#). The transit switch acts as a transparent DCB access layer between FCoE servers and the FC switch.

**Figure 163: FCoE Transit Switch Connecting FCoE Devices to an FC Switch**

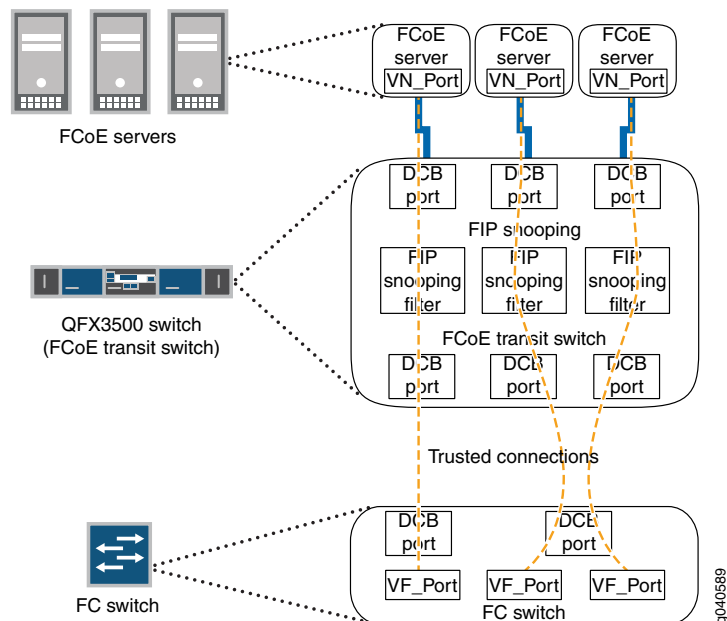



The transit switch performs FIP snooping at the ports connected to the FCoE devices. For VN2VF\_Port FIP snooping, at the SAN edge, the FC switch must be able to convert the FCoE traffic to native FC traffic. (VN2VN\_Port FIP snooping switches traffic between VN\_Ports directly through the transit switch, without going through the FC switch, so no conversion of FCoE traffic to native FC traffic is needed.)

Encapsulated FCoE traffic flows through the transit switch to the FCoE ports on the FC switch. The FC switch removes the Ethernet encapsulation from the FCoE frames to restore the native FC frames. Native FC traffic travels out native FC ports to storage devices in the FC SAN.

Native FC traffic from storage devices flows to the FC switch FC ports, and the FC switch encapsulates that traffic in Ethernet as FCoE traffic. The FCoE traffic flows through the transit switch to the appropriate FCoE device.



**NOTE:** The FC switch and FC fabric apply appropriate zoning checks on traffic to and from each ENode and provide FC services (for example, name server, fabric login server, or event server).

---



**NOTE:** The QFX3500 switch supports VN\_Port to VN\_Port FIP snooping to allow FCoE initiators and targets to communicate directly through the switch without going through an FCoE forwarder (FCF) or an FC switch. An FCoE VLAN can support either VN2VF\_Port FIP snooping (FC-BB-5) or VN2VN\_Port FIP snooping (FC-BB-6), but not both. The same QFX3500 switch can have multiple FCoE VLANs configured, some FCoE VLANs for VN2VF FIP snooping traffic and others for VN2VN FIP snooping traffic.

---

For load balancing, increasing available bandwidth, and port failover protection, you can configure the 10-Gigabit Ethernet interfaces that belong to an FCoE VLAN as a link aggregation group (LAG). In addition, creating a LAG prevents spanning tree algorithms from blocking physical links and wasting bandwidth.

**Related  
Documentation**


- [Overview of Fibre Channel on the QFX Series on page 4380](#)
- [Understanding DCB Features and Requirements on page 4389](#)
- [Understanding an FCoE-FC Gateway on page 4399](#)
- [Understanding FCoE on page 4392](#)
- [Understanding VN\\_Port to VF\\_Port FIP Snooping on an FCoE Transit Switch on page 4448](#)
- [Understanding VN\\_Port to VN\\_Port FIP Snooping on an FCoE Transit Switch on page 4454](#)
- [Understanding Fibre Channel Terminology on page 4483](#)



## Understanding an FCoE-FC Gateway

A Fibre Channel over Ethernet (FCoE)-Fibre Channel (FC) gateway connects FCoE devices on an Ethernet network to an FC switch in an FC storage area network (SAN) as shown in [Figure 164 on page 4399](#). To FCoE devices such as servers, the FCoE-FC gateway presents virtual fabric ports (VF\_Ports) and appears to be an FCoE forwarder (FCF). To the FC switch, the FCoE-FC gateway presents a proxy node port (NP\_Port) and appears to be an FC device.

**Figure 164: FCoE-FC Gateway Topology**

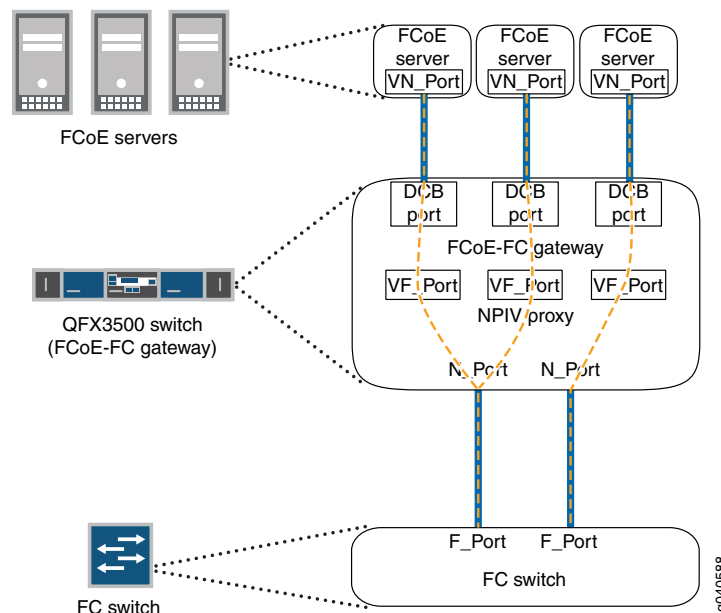

The FCoE-FC gateway handles FCoE Initialization Protocol (FIP) and FCoE traffic on the interfaces connected to FCoE devices. The gateway forwards native FC traffic on the interfaces to the FC switch. The gateway does not provide FC services (such as fabric login server or name server). It is a proxy for an FCF, not an FCF or an FC switch. The gateway transparently substitutes for the FC switch when communicating with FCoE devices and transparently substitutes for FCoE devices when communicating with the FC switch.

The gateway does not use an FC domain ID, so it extends the SAN fabric while saving domain resources. Using the gateway also means that the FC switch does not have to handle FCoE traffic (and therefore requires no FCoE blades or ports). The gateway converges Ethernet and FC backbones to leverage existing resources.

- [Gateway FC Fabric on page 4400](#)
- [Fabric Services on page 4401](#)
- [FCoE-FC Gateway Traffic Switching on page 4401](#)



## Gateway FC Fabric

---

A gateway FC fabric is a QFX Series configuration construct. It is not the same thing as an FC fabric in the SAN; the gateway FC fabric is local to the switch. It creates associations that connect FCoE devices with converged network adapters (CNAs) on the Ethernet network to an FC switch on the Fibre Channel network. A gateway FC fabric consists of:

- A unique fabric name.
- A unique fabric ID.
- At least one dedicated VLAN for FCoE traffic. VLANs that carry FCoE traffic should not carry any other type of traffic.



**NOTE:** On a QFX3500 or QFabric system Node device, the same VLAN cannot be used in both transit switch mode and FCoE-FC gateway mode.

- At least one FCoE VLAN interface (Layer 3 VLAN interface) that includes one or more 10-Gigabit Ethernet interfaces connected to FCoE devices. The FCoE VLANs transport traffic between the FCoE servers and the FCoE-FC gateway. Each FCoE VLAN must carry only FCoE traffic. You cannot mix FCoE traffic and standard Ethernet traffic on the same VLAN.

The 10-Gigabit Ethernet interfaces that connect to FCoE devices must include a native VLAN to transport FIP traffic because FIP VLAN discovery and notification frames are exchanged as untagged packets.

Each FCoE VLAN interface can present multiple VF\_Port interfaces to the FCoE network.



**NOTE:** Storm control must be disabled on all Ethernet interfaces that belong to the FCoE VLAN to prevent FCoE traffic from being dropped.

- One or more native FC interfaces. The native FC interfaces transport traffic between the gateway and the FC switch.



**TIP:** If the network does not use a dual-rail architecture for redundancy, configure more than one native FC interface for each FC fabric to create redundant connections between the FCoE devices and the FC switch. If one physical link goes down, any sessions it carried can log in again and connect to the FC switch on a different interface. Even in dual-rail architecture networks, creating redundant connections between the QFabric system and the FC switch is the best practice.

You can also configure FIP parameters for the fabric or accept the default FIP parameters. VN\_Port to VF\_Port (VN2VF\_Port) FIP snooping is automatically enabled on all server-facing ports because all ports are untrusted by default. You can disable VN2VF\_Port FIP snooping on a port-by-port basis by marking a port as an FCoE trusted interface. You



can disable VN2VF\_Port FIP snooping on all Ethernet ports in an FC fabric by configuring the fabric as FCoE trusted.

Because the switch has 12 native FC ports and each FC fabric requires a minimum of one native FC port, the switch supports a maximum of 12 FC fabrics. However, as a best practice for redundancy, we recommend that you assign at least two native FC interfaces to each FC fabric.

On a QFabric system, all of the FC and FCoE traffic that belongs to a particular gateway FC fabric must ingress and egress the same gateway Node device. Gateway FC fabrics do not span across Node devices. All of the native FC interfaces and the Ethernet interfaces that belong to the FCoE VLAN must reside on the same gateway Node device to be included in an FC fabric on that Node device.

Traffic from FC and FCoE devices that are not in the same FC fabric remain separate and cannot communicate with each other through the gateway.

### **Fabric Services**

---

The FC switch provides all FC services (domain manager, name server, fabric login server, and so on) except FIP to the FCoE devices. The FC switch assigns all FCIDs (through N\_Port ID virtualization) and fabric attributes to FCoE device VN\_Ports.

The FCoE-FC gateway does not provide FC services (except FIP). The gateway relays communication between the FC switch and the FCoE devices, encapsulates and de-encapsulates native FC frames, converges Ethernet and FC backbones, and aggregates FCoE device VN\_Port sessions.


### **FCoE-FC Gateway Traffic Switching**

---

All traffic that flows through the gateway FC fabric is switched through the FC switch. Even if two hosts on the Ethernet FCoE network connect directly to the gateway, FCoE communication between them goes through the FC switch, as shown in [Figure 165 on page 4402](#).



**Figure 165: Traffic Switching Between FCoE Hosts Connected to the FC Network by an FCoE-FC Gateway**

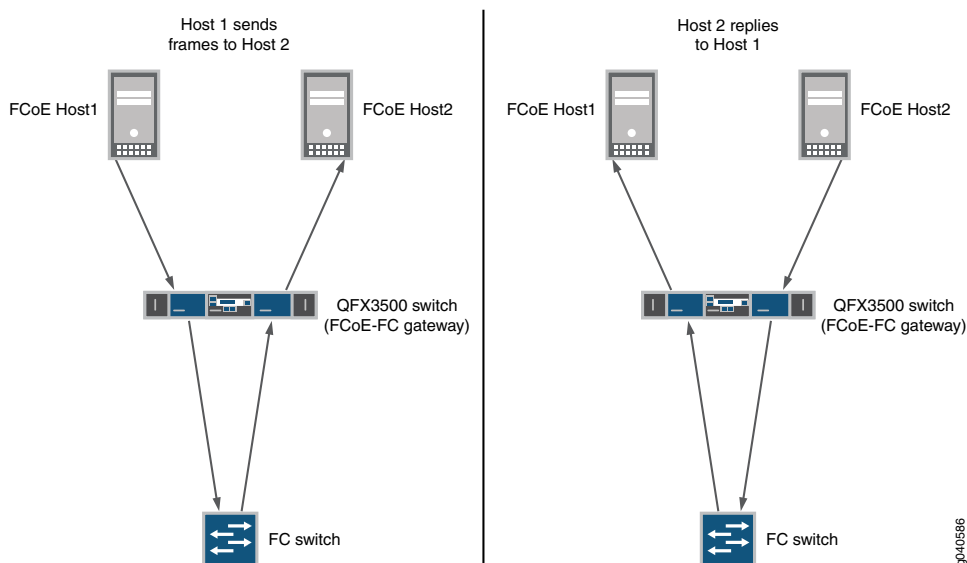

For example, FCoE host server *Host1* sends frames destined for FCoE host server *Host2*. Both *Host1* and *Host2* are directly connected to the gateway. The communication path looks like this:

1. *Host1* sends FCoE frames destined for *Host2* to the gateway.
2. The gateway de-encapsulates the FCoE frames from *Host1* into native FC frames and switches them to the FC switch.
3. The FC switch processes the native FC frames and sends them back to the gateway destined for *Host2*.
4. The gateway encapsulates the FC frames in Ethernet and sends the resulting FCoE frames to *Host2*.
5. When *Host2* replies, the FCoE reply goes to the gateway. The gateway de-encapsulates the reply and switches it to the FC switch for processing. The FC switch then sends it back to the gateway, which encapsulates the FC frames and sends them to *Host1*.

#### Related Documentation

- [Overview of Fibre Channel on the QFX Series on page 4380](#)
- [Understanding Fibre Channel on page 4385](#)
- [Understanding FCoE-FC Gateway Functions on page 4403](#)
- [Overview of FIP on page 4384](#)
- [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)
- [Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495](#)
- [Disabling Storm Control on FCoE Interfaces on an FCoE-FC Gateway on page 4586](#)



- [Understanding Fibre Channel Terminology on page 4483](#)

## Understanding FCoE-FC Gateway Functions

When it functions as a Fibre Channel over Ethernet (FCoE)-Fibre Channel (FC) gateway, the QFX Series provides the following functions:

- [Login and Logout on page 4403](#)
- [FCoE and FC Frame Handling on page 4403](#)
- [Data Center Bridging on page 4403](#)
- [Disabling the Fabric WWN Verification Check on page 4404](#)
- [Load Balancing on page 4405](#)

### Login and Logout

---

Each of the native FC interfaces on the gateway performs a fabric login (FLOGI) to the FC switch when each interface initializes. This establishes the link between each gateway FC interface and the FC switch.

When FCoE devices on the Ethernet network send an FCoE Initialization Protocol (FIP) login (FIP FLOGI) or FIP discovery (FIP FDISC) request to the gateway, the gateway acts on behalf of those devices and converts their FIP FLOGI and FIP FDISC requests to FC FDISC requests. The gateway then sends the FC FDISC requests to the FC switch. When the FC switch responds to an FDISC request, the gateway converts the FC response into a FIP response and sends it to the appropriate FCoE device.

The gateway also converts FIP logout (LOGO) requests from FCoE devices into FC LOGO requests to the FC switch, and converts the FC switch response into a FIP response for the FCoE device.

### FCoE and FC Frame Handling

---

When it receives FCoE frames from FCoE devices, the gateway strips away the Ethernet encapsulation from the FC frame before sending the native FC frame to the FC switch.

When it receives native FC frames from the FC switch, the gateway encapsulates the native FC frames in Ethernet before sending the resulting FCoE frames to the appropriate VN\_Port.

### Data Center Bridging

---

The Ethernet ports connected to the FCoE devices are 10-Gbps Ethernet ports and support data center bridging (DCB) specifications:

- Priority-based flow control (PFC, described in IEEE 802.1Qbb)
- Data Center Bridging Capability Exchange protocol (DCBX), which is an extension of Link Layer Data Protocol (LLDP, described in IEEE 802.1AB)
- Enhanced transmission selection (ETS, described in IEEE 802.1Qaz)
- 10-Gigabit Ethernet ports



### Disabling the Fabric WWN Verification Check

---

The gateway connects to a SAN fabric using the gateway NP\_Ports (native FC ports). When the NP\_Ports initialize, each port sends a FLOGI to the FC switch to which it is connected in the SAN fabric. The FC switch sends a FLOGI accept (FLOGI-ACC) message back to each NP\_Port. The FLOGI-ACC message includes the SAN fabric worldwide name (WWN). The gateway uses the SAN fabric WWN in the multicast discovery advertisement (MDA) that the gateway sends to the ENodes in the FCoE network.

Some FC switches substitute their own WWN (often the FC switch's virtual WWN) for the SAN fabric WWN in the FLOGI-ACC message. When the FC switch substitutes its own WWN for the fabric WWN, gateway NP\_Ports that log in to the same SAN fabric might receive different fabric WWNs in the FLOGI-ACC messages if the NP\_Ports are connected to different FC switches in that SAN fabric. This creates a problem, because different fabric WWNs indicate different SAN fabrics. But in this scenario, the different fabric WWNs come from different FC switches in the same SAN fabric.

If the gateway receives different fabric WWNs on NP\_Ports that are connected to the same SAN fabric, the gateway uses the first fabric WWN it receives in the MDA it sends to the ENodes. The gateway isolates the NP\_Ports connected to that fabric that receive a different fabric WWN in the FLOGI-ACC message. No ENode sessions are assigned to the isolated NP\_Ports. FC traffic is assigned only to NP\_Ports that receive a fabric WWN that matches the fabric WWN received by the first NP\_Port to log in to the FC fabric. (If an NP\_Port receives a fabric WWN that does not match the fabric WWN received by the first NP\_Port to log in to the FC fabric, it does not carry traffic to the SAN fabric.)

In summary, the scenario is:

1. The gateway has multiple NP\_Ports connected to more than one FC switch in a SAN fabric.
2. When the NP\_Ports initialize, each NP\_Port sends a FLOGI to the FC switch to which it is connected.
3. The FC switches substitute their own WWNs for the fabric WWN in the FLOGI-ACC message, so different NP\_Ports receive different fabric WWNs.
4. In the MDA the gateway sends to FCoE devices, the gateway uses the fabric WWN that the first NP\_Port to log in to the fabric receives in the FLOGI-ACC message. If other NP\_Ports receive a different fabric WWN from other FC switches in the SAN fabric, that fabric WWN is not advertised.
5. NP\_Ports that receive a fabric WWN that does not match the first received fabric WWN are isolated, and the ENode sessions cannot use those ports.

To prevent this from happening, you can disable the gateway fabric WWN verification check so that all NP\_Ports connected to a SAN fabric are used to carry traffic between the gateway and the FC switch, regardless of the fabric WWN the NP\_Port receives in the FLOGI-ACC message.





**NOTE:** Disabling or enabling the fabric WWN verification check logs out all FCoE sessions.

### Load Balancing

The switch performs automatic link load balancing for the connections between the gateway and the FC SAN and can also perform load balancing for the connections between the gateway and the FCoE devices in the Ethernet network. On the native FC links (NP\_Ports) between the gateway and the FC SAN, the gateway can use one of the following two load-balancing algorithms:

- Simple load balancing—Each ENode FLOGI session and VN\_Port FDISC session is assigned to the least-loaded link. This is the default load-balancing algorithm.
- ENode-based load balancing—When an ENode logs in to the fabric, all subsequent DISC sessions associated with that ENode are placed on the same link as the ENode FLOGI session, regardless of the link load. New ENode FLOGIs are placed on the least-loaded link.



**NOTE:** Changing the load-balancing algorithm when FCoE sessions are running forces the FCoE sessions to log out, then log in again.

You can balance the load on the Ethernet ports facing the FCoE devices by configuring those ports as a link aggregation group (LAG).

#### Related Documentation

- [Understanding Fibre Channel on page 4385](#)
- [Understanding an FCoE-FC Gateway on page 4399](#)
- [Understanding DCB Features and Requirements on page 4389](#)
- [Understanding Load Balancing in an FCoE-FC Gateway Proxy Fabric on page 4431](#)
- [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)
- [Disabling the Fabric WWN Verification Check on page 4577](#)
- [Monitoring Fibre Channel Interface Load Balancing on page 4665](#)

### Understanding FCoE and FIP Session High Availability

The QFX Series provides high availability features to maintain storage network sessions when a system process is terminated and during certain types of upgrades:

- [Fibre Channel Process Termination High Availability \(FCoE-FC Gateway Mode\) on page 4406](#)
- [FIP Snooping High Availability on page 4406](#)
- [Nonstop Software Upgrade \(QFabric Systems\) on page 4407](#)



### Fibre Channel Process Termination High Availability (FCoE-FC Gateway Mode)

In FCoE-FC gateway mode, the QFX3500 switch provides high availability to restore the FCoE sessions running on the switch in case the Fibre Channel (FC) process is terminated. A session is a fabric login (FLOGI) or fabric discovery (FDISC) login to the FC SAN fabric, not an end-to-end server-to-storage session.

The switch stores FCoE session data in a persistent storage module. If the FC process terminates, the switch restores the existing FCoE sessions on the same interfaces that they were on before the FC process terminated. Data traffic for existing sessions is not affected during session restoration.

For a brief time, the system does not process control traffic because of the FC process restart and session restoration. During this brief time, no new FCoE sessions can be established, and no existing sessions can log out.



**NOTE:** During the restoration process, if the FC process does not receive an “interface up” notification from a particular interface within a certain time, the switch times out the restore operation and discards the data on that interface. The previously existing FCoE sessions on that interface are not restored, and the ENodes must log in again.



**NOTE:** An FC process restart and session restoration resets the Fibre Channel statistics.

If the FC process terminates repeatedly, the operating system disables the process until you manually restart it. To restart the FC process manually, issue the **restart fibre-channel** command.

### FIP Snooping High Availability

You can configure the system to perform FIP snooping on Ethernet interfaces that are connected to FCoE devices that have ENodes. The QFX Series provides high availability to restore running FIP snooping sessions in case the Ethernet switching process is terminated.

The Ethernet switching process stores the FIP snooping state in a persistent storage module. If the Ethernet switching process terminates, the QFX Series restores the existing FIP snooping sessions on the same interfaces that they were on before the Ethernet switching process terminated. The high availability features preserve:

- Logged in ENodes
- Discovered FCFs
- Existing sessions
- Existing FIP snooping filters



In the event of an Ethernet switching process termination, ENodes remain logged in and existing sessions are not interrupted.



**NOTE:** An Ethernet switching process restart and session restoration resets the FIP snooping statistics.

### Nonstop Software Upgrade (QFabric Systems)

On QFabric system Node groups that have more than one Node device, nonstop software upgrade (NSSU) enables you to upgrade the Node devices with minimal packet loss and maximum uptime. NSSU automates software upgrades on the QFabric system components in an orderly and consistent manner to maximize system uptime.

The system upgrades components with redundant architectures, such as redundant server Node groups and network Node groups that have two or more members, in stages. While the system upgrades one component, the redundant component continues to function.

For example, while one member of a redundant server Node group is upgraded, the other member continues to forward traffic. When the first Node group member completes the upgrade, it comes online while the system upgrades the second member.

NSSU provides high availability for the lossless traffic forwarding required to support storage networks. If your system design includes redundancy (redundant Node devices in Node groups, LAGs, etc.) so that an alternate traffic path is available, when you upgrade a Node device, traffic is not impacted.

In fully redundant topologies, NSSU preserves FIP session, FIP snooping filter, VN2VF\_Port session, and VN2VN\_Port session information and prevents traffic loss in most cases. An exception is that Node devices that are directly connected to ENodes experience momentary traffic loss when the Node device reboots.

#### Related Documentation

- [Understanding an FCoE-FC Gateway on page 4399](#)
- [Understanding FCoE on page 4392](#)
- [Understanding Nonstop Software Upgrade for QFabric Systems on page 1770](#)
- [Performing a Nonstop Software Upgrade on the QFabric System on page 80](#)



## Understanding FIP Functions

Fibre Channel over Ethernet (FCoE) Initialization Protocol (FIP) performs four major functions:

- FIP VLAN discovery: FCoE device FCoE nodes (ENodes) discover the FCoE VLANs on which to transmit and receive FIP and FCoE traffic.
- FIP discovery: FCoE devices discover Fibre Channel (FC) switches to which they can connect.
- Initialization: FCoE devices perform fabric login (FLOGI) and fabric discovery (FDISC) to create a virtual link with an FC switch.
- Maintenance: The QFX Series ensures that the virtual link between the FCoE device and the FC switch remains valid, and also that the link termination logout (LOGO) functions properly.

When you configure the switch as an FCoE-FC gateway, it converts FIP requests and information from FCoE devices into FC requests and information and relays them to the FC switch. To FCoE devices, the gateway appears to be an FCoE forwarder (FCF) and presents virtual fabric port (VF\_Port) interfaces to the server ENode. To FC switches, the gateway appears to be an FC device that supports N\_Port ID virtualization (NPIV) and presents an N\_Port interface to the FC switch F\_Port interface. When you configure the QFX Series as an FCoE transit switch, you do not configure FIP parameters on the switch.

FIP FLOGI, FDISC, and LOGO are similar to the same processes in the native FC protocol.

This topic describes:

- [FIP VLAN Discovery on page 4408](#)
- [FIP Discovery on page 4409](#)
- [FIP FLOGI on page 4410](#)
- [FIP FDISC on page 4410](#)
- [FIP Maintenance \(Keepalive Messages\) on page 4411](#)
- [FIP LOGO on page 4411](#)

---

### FIP VLAN Discovery

The gateway supports FIP VLAN discovery. Host ENodes use FIP VLAN discovery to discover the FCoE VLANs on which they will send and receive FIP and FCoE traffic and on which they will establish a virtual link with the FC switch. This means FCoE devices do not need manually configured FCoE VLANs.

FIP VLAN discovery and notification takes place on the native VLAN that the FCoE device uses for Ethernet traffic:

1. The ENode sends a FIP VLAN discovery request to a multicast address called *ALL-FCF-MACs* to which all FC switches and FCFs on the VLAN listen.
2. The FC switches and FCFs respond on the native VLAN with a list of the FCoE VLANs that are available for login.



3. The ENode selects an FCoE VLAN and continues the FIP process on that VLAN.

Except for FIP VLAN discovery, all other FIP and FCoE traffic runs on an FCoE VLAN.



**BEST PRACTICE:** Only FCoE traffic is permitted on the FCoE VLAN. A native VLAN might need to carry untagged traffic of different types and protocols. Therefore, it is a good practice to keep the native VLAN separate from FCoE VLANs.

### FIP Discovery

The FIP discovery process allows an FCoE device ENode MAC to locate (discover) the FC switches in the FCoE VLAN to which it belongs. The ENode selects an FC switch to log in to from the available FC switches. Either the ENode MAC or the FC switch can initiate the FIP discovery process.

Server ENode MACs initiate FIP discovery:

1. When an ENode MAC comes online, it sends a multicast discovery solicitation message on its FCoE VLAN to a multicast address called *ALL-FCF-MACs* to which all FCFs (including the FCF functionality of FC switches) on the VLAN listen. The discovery solicitation message includes the ENode's addressing mode and the maximum protocol data unit (PDU) size the ENode MAC uses for FCoE traffic.

The ENode uses the globally unique ENode MAC address assigned to it by the converged network adapter (CNA) manufacturer as an identifier in the FIP frame header.

2. The FCFs on the VLAN that have a similar supported addressing mode, match the maximum FCoE size, and can accept a login from the ENode reply to the discovery solicitation message by sending a solicited unicast discovery advertisement message to the soliciting ENode MAC.
3. The ENode MAC compiles a list of FCFs that are available for login, selects an FCF (the FCF with the highest priority setting), and is then ready to log in to the FCF.

The FIP discovery process is similar when the FC switch or FCF initiates discovery:

1. FCF MACs periodically send unsolicited multicast discovery advertisements on the FCoE VLAN to the *ALL-ENode-MACs* multicast address, to which all ENode MACs on the VLAN listen. The FIP keepalive advertisement period timer (FKA\_ADV\_PERIOD) controls the interval between multicast discovery advertisements. The multicast discovery advertisements inform ENodes on the VLAN that FCF VF\_Ports are available for establishing virtual links with ENode VN\_Ports.
2. ENodes on the FCoE VLAN create an entry for the FCF-MAC in their FCF-MAC lists.
3. An ENode can respond to the unsolicited multicast discovery advertisement with a unicast discovery solicitation message to the FCF.
4. Upon receiving the ENode's unicast discovery solicitation, the FCF replies with a unicast discovery advertisement sent to the ENode MAC.



After the ENode MAC selects an FCF to log in to, FIP initialization begins. To proceed from discovery to initialization, the server ENode addressing mode must match the FCF addressing mode and maximum FCoE size. In addition, the FCF must be configured to allow FIP FLOGI from that ENode.

### FIP FLOGI

---

FIP initialization is the server ENode login process to the FCF after the ENode discovers the FCFs (including FC switches) on the FCoE VLAN:

1. The ENode sends a fabric login (FLOGI) request message to the FCF.
2. The FCF replies to confirm the ENode login and provides the ENode a locally unique MAC address to use for FCoE frame transactions. The locally unique MAC address identifies the VN\_Port interface of the ENode for the session the login establishes. (The ENode continues to use the globally unique ENode MAC address for FIP frame transactions.)

The locally unique ENode MAC address for FCoE operations depends on whether the ENode address mode is configured as a fabric-provided MAC address (FPMA) or as a server-provided MAC address (SPMA; the gateway does not support ENodes in SPMA mode and rejects login attempts from ENodes in SPMA mode):

- For FPMA mode, the FCF provides a MAC address to the ENode during the FIP FLOGI exchange. The FPMA MAC address is a 48-bit value that is unique to the local fabric and consists of a 24-bit FCoE mapped address prefix (FC-MAP) and a 24-bit FC identifier (FCID). You can configure the FC-MAP value on the FCF or use the default value of 0EFC00h. The FCoE device must use the same FC-MAP value as the FCF, or else discovery and login fail.
- For SPMA mode, the server provides its MAC address to the FCF. The FCF compares the server MAC address to a list of addresses approved for FCoE access. The gateway does not support ENodes in SPMA mode.

Successful login instantiates a secure virtual link between the ENode and the FCF and terminates the FIP virtual link instantiation phase. The initiating server behind the ENode can exchange FC payloads with storage devices in the FC SAN by sending FCoE frames over the virtual link.

### FIP FDISC

---

After an ENode successfully logs in to an FCF and establishes a virtual link, the ENode can request more virtual links (sessions) over the same physical link by sending a FIP fabric discovery (FDISC) request. FDISC allows the creation of multiple separate secure VN\_Port virtual links on one physical link. Each virtual link receives a locally unique identifier from the FCF to enable security and separation between the VN\_Port virtual links sharing a physical ENode port. This is called N\_Port ID virtualization (NPIV).

FDISC is similar to FLOGI in that it requests a login and a unique ID from the FCF. The difference is that FLOGI obtains the initial login and ID for the physical link, whereas FDISC obtains additional logins and IDs so that multiple virtual links can share one physical link securely.



After a VN\_Port FDISC is complete, the application using that VN\_Port can send FCoE frames over the virtual link.

### FIP Maintenance (Keepalive Messages)

Although FCoE protocol handles the payload communication between the initiating ENode and the target FC device, FIP continues to run in the background. FIP constantly updates ENode FCF lists by listening to the periodic FCF multicast discovery advertisements, and it verifies the ability to reach the FCF by transmitting periodic FIP keepalive advertisements.

The ENode sends periodic ENode FIP keepalive advertisements to the FCF with the ENode MAC address as the identifier. The ENode also sends periodic VN\_Port FIP keepalive advertisements on behalf of each VN\_Port on the ENode, using the VN\_Port MAC address as the source MAC. The VN\_Port FIP keepalive advertisements occur every 90 seconds. The keepalive advertisements reset the session timer for the virtual link connection to the FCF. If the FCF does not receive a keepalive advertisement for a logged-in ENode or VN\_Port before the session timer expires, the virtual link is terminated.

The periodic unsolicited multicast discovery advertisements the FCF sends to the *ALL-ENode-MACs* address continuously verify that the FCF is still reachable. The ENode and the FCF periodic unsolicited multicast discovery advertisements occur at the configured FIP keepalive advertisement period interval (FKA\_ADV\_PERIOD) plus or minus a random offset to prevent a flood of simultaneous keepalive advertisements.

If the FCF does not receive the ENode keepalive advertisements before the FCF's FIP keepalive timer expires, the FCF considers the virtual link to the ENode as "down" and terminates the virtual link to the ENode. The keepalive timer expires in 2.5 times the configured timer value. This also terminates any VN\_Port virtual links instantiated by that ENode.

If the FCF does not receive a VN\_Port keepalive advertisement before the FCF's FIP keepalive timer expires, the FCF considers the virtual link to the VN\_Port as "down" and terminates the virtual link to that VN\_Port. The VN\_Port keepalive timer expires in 2.5 times the configured timer value.

If the ENode does not receive the FCF unsolicited multicast discovery advertisement before the ENode's FIP keepalive timer expires, the ENode considers the virtual link to the FCF as "down" and all of the VN\_Port virtual links to that FCF on the ENode are terminated.

### FIP LOGO

FIP handles ENode and VN\_Port logout when a session is finished.

#### Related Documentation

- [Overview of FIP on page 4384](#)
- [Understanding FIP Implementation on page 4412](#)
- [Understanding FIP Parameters on an FCoE-FC Gateway on page 4416](#)
- [Understanding Fibre Channel Virtual Links on page 4419](#)
- [Understanding FCoE on page 4392](#)



## Understanding FIP Implementation

In a network that converges Fibre Channel (FC) and Ethernet traffic, when you configure the QFX Series as a Fibre Channel over Ethernet (FCoE)-FC gateway, it translates FCoE Initialization Protocol (FIP) frames from FCoE nodes (ENodes) into native FC frames for FC switches and translates native FC frames from FC switches into FIP frames for ENodes. To an FCoE device, the gateway appears to be an FCoE forwarder (FCF) and presents a fabric port (F\_Port) interface to the FCoE device ENode. To an FC switch, the gateway appears to be an FC host capable of N\_Port ID virtualization (NPIV) and presents a node port (N\_Port) interface to the FC switch F\_Port interface.



**NOTE:** The N\_Ports that the gateway presents to the FC switch are called proxy N\_Ports (NP\_Ports). To the FC switch, the gateway NP\_Ports appear to be native FC N\_Ports that are capable of performing NPIV. The NP\_Ports are proxies for the FCoE devices in the Ethernet network. The NP\_Ports convert FCoE traffic from the FCoE devices into native FC traffic for the FC switch. The NP\_Ports also convert native FC traffic from the FC switch into FCoE traffic for the FCoE devices on the Ethernet network.

- [FIP Basics on page 4412](#)
- [Fabric Login and FIP Login Overview on page 4413](#)
- [Proxy FIP Discovery on page 4414](#)
- [Proxy FIP Initialization on page 4414](#)
- [Proxy FIP Maintenance on page 4415](#)
- [Proxy FIP Logout on page 4415](#)

---

### FIP Basics

FIP is enabled by default on all VLAN interfaces that belong to each FC fabric configured on the gateway. You can configure FIP parameters at a global level or on an individual interface. When you configure a parameter on an interface, it overrides the global configuration only for that interface. If you do not explicitly configure a FIP parameter, the gateway uses the default value.

In order for the gateway to connect FCoE devices with FCFs, the FIP parameters you configure on the gateway must be compatible with the parameters configured on the FC switch (for example, the FC-MAP values of the FC switch and of the FC fabric FIP configuration on the gateway must match, or the FC switch drops the frames).

When the NP\_Ports on the gateway come up, they perform an FC FLOGI to the connected FC switch. Successful login establishes communication between the gateway and the FC switch, and gateway NP\_Ports are marked for sending FDISC messages. Successful login also creates a next-hop entry in the gateway for the FC switch. If the FC switch rejects the FLOGI request, no link is established. The gateway maintains a list of valid FCF-MACs with which ENodes can connect.




After establishing communication with an FC switch, the gateway can connect FCoE devices in the Ethernet network to the FC switch. All of the subsequent connections the gateway makes with FC switches as a proxy for ENodes (on behalf of ENodes) are virtualized (NPIV) connections.

### Fabric Login and FIP Login Overview

Figure 166 on page 4413 provides a brief overview of the FCoE-FC gateway fabric login to the FC switch and the FCoE device FIP login to the gateway.

**Figure 166: FCoE-FC Gateway Fabric Login and FIP Login**

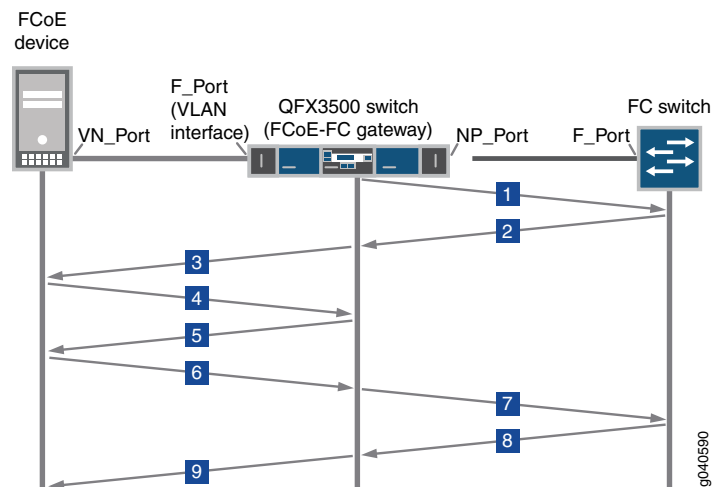

The numbers in the following list correspond to the numbers in Figure 166 on page 4413 and briefly describe each step of the login process:

1. The FCoE-FC gateway NP\_Port sends an FC fabric login (FLOGI) request to the FC switch F\_Port.
2. The FC switch accepts the gateway FLOGI.
3. The gateway sends FIP multicast discovery advertisements on the FCoE VLAN (the gateway F\_Port interface) to all connected FCoE device ENodes.
4. The FCoE device ENode sends a discovery solicitation message to the gateway.
5. The gateway responds with a unicast discovery advertisement to the ENode.



**NOTE:** The gateway limits the number of discovery solicitations it accepts from FCoE devices to a maximum of 100 outstanding requests at any given time. If the gateway has 100 discovery solicitations outstanding, the gateway does not respond to new discovery solicitations. Instead, the gateway drops new discovery solicitations and reports the number of dropped discovery solicitations in the **Dropped** field of the `show fibre-channel fip statistics` command output. When there are fewer than 100 outstanding discovery solicitations, the system responds to new requests as usual with a discovery advertisement.



6. The FCoE device sends a FIP FLOGI or FIP FDISC message to the gateway.
7. The gateway converts the FIP FLOGI or FIP FDISC to an FC FDISC and forwards it to the FC switch to obtain a login for the FCoE device.
8. The FC switch responds to the FC FDISC by sending a new ID for the NPIV session to the gateway.
9. The gateway converts the FC FDISC response from the FC switch to a FIP FDISC response and forwards it to the FCoE device.

The following sections describe some of these steps in greater detail.

### Proxy FIP Discovery

---

After the gateway establishes a connection with an FC switch:

1. The gateway sends periodic FIP multicast discovery advertisements on the FCoE VLAN so that ENodes can add the gateway to their FCF lists.
2. The ENode initializes and sends a multicast discovery solicitation message on the FCoE VLAN. If the ENode has already initialized and has a list of FCFs, it can send a unicast discovery solicitation message to a particular FCF such as the gateway.



.....

**NOTE:** The gateway limits the number of discovery solicitations it accepts from FCoE devices to a maximum of 100 outstanding requests at any given time. If the gateway has 100 discovery solicitations outstanding, the gateway does not accept new discovery solicitations until there are fewer than 100 discovery solicitations outstanding.

.....

3. When the gateway receives a multicast discovery solicitation from an ENode, it responds by sending a unicast discovery advertisement to that ENode.

When the gateway receives a unicast discovery solicitation from an ENode, it also responds with a unicast discovery advertisement to the ENode.

To the ENode, the gateway appears to be an FCF.

The FIP discovery process adds the ENode to the gateway ENode database.

### Proxy FIP Initialization

---

1. If the ENode chooses to log in to the gateway, it responds to the gateway's unicast discovery advertisement by sending a login request in the form of a FIP FLOGI if it is the initial connection to the gateway. If the ENode already has an established session with the gateway and another application or virtual machine wants to connect to the gateway, the ENode sends a FIP FDISC to the gateway.
2. The gateway receives the FIP FLOGI or FIP FDISC from the ENode, converts it into an FC FDISC, and sends it through the least-loaded NP\_Port to the FC switch on behalf of the ENode. The FC FDISC message requests an FCID for the new virtual link.





**NOTE:** The gateway converts both ENode FIP FLOGI and FIP FDISC messages into FC FDISC messages, because the gateway has already performed FC FLOGI with the FC switch, so all subsequent connection requests on the gateway NP\_Port are FDISC requests for virtual (NPIV) connections. FDISC messages request a virtual N\_Port connection over an existing physical N\_Port connection.

3. The FC switch processes the request, accepts it, assigns a unique FCID for the connection, and then sends the response to the gateway. If the FC switch rejects the FDISC request, no virtual link is established.
4. The gateway maps the FC switch response to the ENode VN\_Port, converts the FC acceptance message to a FIP FLOGI or FIP FDISC response, and sends it to the ENode VN\_Port.
5. The ENode VN\_Port accepts the FCID, and the virtual link is established.

If an ENode sends an FDISC, the proxy gateway switch checks whether the ENode has already performed a FLOGI to create the initial connection. If the ENode has not performed a FLOGI, the FDISC request is dropped.

The FC protocol does not recognize multipoint-to-point connections. Although the gateway can aggregate traffic from multiple FCoE servers on one NP\_Port, each virtual link appears to be an individual point-to-point link between an FCoE ENode VN\_Port and the FC switch, not as an aggregated multipoint-to-point link. The gateway is essentially invisible to the FC protocol, so the virtual link looks and acts like a point-to-point link from the FCoE device to the FC switch.

### Proxy FIP Maintenance

The gateway sends and receives periodic FIP keepalive messages to and from ENode VN\_Ports to maintain the connection between the gateway and the ENodes.

### Proxy FIP Logout

As with FIP discovery and FIP FLOGI, the gateway represents the FCoE device in transactions with the FC switch and represents the FC switch in transactions with the FCoE device:

1. An ENode VN\_Port sends a FIP LOGO message to log off and terminate the virtual link connection.
2. The gateway converts the FIP LOGO to an FC LOGO and relays it to the FC switch.
3. The FC switch responds to the LOGO request.
4. The gateway converts the FC LOGO response to a FIP LOGO response and relays it to the VN\_Port, completing the logout and terminating the virtual link.

#### Related Documentation

- [Overview of FIP on page 4384](#)
- [Understanding FIP Functions on page 4408](#)



- [Understanding FIP Parameters on an FCoE-FC Gateway on page 4416](#)
- [Understanding Fibre Channel Virtual Links on page 4419](#)
- [Understanding FCoE on page 4392](#)
- [Configuring FIP on an FCoE-FC Gateway on page 4589](#)

## Understanding FIP Parameters on an FCoE-FC Gateway

By default, FIP is enabled, and the default FIP settings are valid on all FCoE interfaces that are part of the gateway FC fabric. You can configure some FIP parameters at a global level or on a specific interface. Some FIP parameters can be configured only at the global level or only at the individual interface level. When you configure a parameter at the interface level, the configuration overrides the global setting for that interface only.

- [FIP Keepalive Advertisement Period on page 4416](#)
- [Addressing Mode on page 4416](#)
- [FC-MAP on page 4417](#)
- [FCoE Trusted Fabric on page 4418](#)
- [Maximum Number of FCoE Sessions Per ENode on page 4418](#)
- [Priority on page 4418](#)

### FIP Keepalive Advertisement Period

---

The FIP keepalive advertisement period (fka-adv-period) is the time interval between messages that verify the connection is still valid and the device at the other end of the virtual link is still reachable. The ENode sends an ENode FIP keepalive advertisement to the gateway with the ENode MAC address as the source address to verify its reachability. The ENode also sends VN\_Port FIP keepalive messages for every VN\_Port on the ENode that is logged in to the gateway, with the VN\_Port MAC address as the source address.

The FIP keepalive advertisement period also determines the time interval between unsolicited multicast discovery advertisements from the gateway to the *ALL-ENode-MACs* multicast address. Unsolicited multicast discovery advertisements serve as keepalive messages from the gateway to the ENodes and also advertise the gateway's presence on the network.

The gateway sends the periodic unsolicited multicast discovery advertisements to the ENodes. On the gateway, you can configure a global FIP keepalive advertisement period for an FC fabric and you can configure a FIP keepalive advertisement period for individual interfaces to override the global setting.

### Addressing Mode

---

For FIP transactions, the ENode identifies itself using the globally unique MAC address assigned to the CNA by the manufacturer. After FIP has established a virtual link between an ENode VN\_Port and the gateway, for FCoE transactions, the VN\_Port identifies itself using a locally unique MAC address. The format of the locally unique MAC address depends on the addressing mode the fabric supports and the addressing mode the ENode is programmed to use.



The addressing mode is not a configurable parameter on the gateway. FC fabrics on the gateway support only the fabric provided MAC address (FPMA) addressing mode for FCoE transactions. The gateway does not support the server provided MAC address (SPMA) addressing mode. ENodes that use SPMA cannot log in to the gateway.

The FC switch assigns a locally unique FPMA to an ENode MAC through the FLOGI or FDISC process:

1. During the FIP discovery process, the ENode compiles a list of compatible FCFs (including the gateway) in the fabric. A compatible addressing mode is one of the criteria an FCF must meet to be added to an ENode's compatible FCFs list.
2. The ENode MAC transmits a FLOGI or FDISC to the FCF that includes the addressing modes the ENode supports.
3. If the FCF supports an addressing mode the ENode uses, the FCF accepts the FLOGI or FDISC and assigns the FPMA in the accept message (FIP FLOGI LS\_ACC or FIP NPIV FDISC LS\_ACC). If the ENode uses an addressing mode that is incompatible with the FCF, the FLOGI or FDISC is rejected.

The FPMA uniquely identifies a single VN\_Port at that ENode MAC in FCoE transactions with the FCF. Each VN\_Port connection receives its own unique FPMA to identify its virtual link connection. When an ENode uses NPIV to create multiple VN\_Ports, each VN\_Port virtual link receives its own unique FPMA to identify its traffic.

An FPMA consists of two concatenated 24-bit values:

1. The upper 24 bits are the FCF's FC-MAP value, which is a MAC address prefix that is unique to the fabric.
2. The lower 24 bits are the locally unique FCID that the FCF (FC switch) assigns to the VN\_Port.

The combination of these values guarantees that each FPMA is unique within a fabric.

### FC-MAP

The FCoE mapped address prefix (FC-MAP) value is a MAC address prefix used by the FCF that is unique within a given fabric. The FCF uses the FC-MAP for FCoE traffic within that fabric. The FCF rejects FCoE traffic that uses an FC-MAP value that does not match the FCF's FC-MAP value. In most cases, the FCF uses the default FC-MAP value (0EFC00), but a pool of 256 values is available (0EFC00 through 0EFCFF).

The gateway learns FC switches in the fabric that match the gateway fabric's FC-MAP value. To learn and communicate with an FC switch, the FC-MAP value for a fabric (or for the fabric's FCoE VLAN) on the gateway must match the FC switch's FC-MAP value. If the FC-MAP values do not match, no connection is established.



**NOTE:** Changing the FC-MAP value causes all logins to drop and forces the ENodes to log in again.



## FCoE Trusted Fabric

---

By default, all interfaces are untrusted interfaces. You can globally configure all of the ports in a specified gateway FC fabric to be FCoE trusted. This reduces system overhead by eliminating the need for filters. The total number of FCoE sessions (ENode to FCF sessions) the system can support is 2500 sessions. Sessions are defined as the combined number of VN\_Port to VF\_Port sessions and VN\_Port to VN\_Port sessions. (Although VN2VF and VN2VN sessions run in different FCoE VLANs, the session limit is a system limit, not a per-VLAN limit.)



**NOTE:** A session is a FLOGI or FDISC login to the FC SAN fabric. Session does not refer to end-to-end server-to-storage sessions. There is no limit to the number of end-to-end server-to-storage sessions.



**NOTE:** Changing the fabric ports from untrusted to trusted removes any existing FIP snooping filters from the ports and terminates the existing sessions. Changing the fabric ports from trusted to untrusted forces all of the FCoE sessions on those ports to log out so that when the ENodes and VN\_Ports log in again, the switch can build the appropriate FIP snooping filters.

## Maximum Number of FCoE Sessions Per ENode

---

You can configure the maximum number of FCoE session logins from each ENode that are permitted on the gateway FC fabric. The number of sessions is the ENode FLOGI session plus the VN\_Port FDISC sessions on that ENode. Regardless of whether the fabric is trusted or untrusted, the maximum number of FCoE sessions per ENode is 2500 sessions. The total number of sessions cannot exceed the gateway fabric's maximum limit of 2500 sessions.

The maximum number of FCoE sessions per ENode is a global configuration for all members of the gateway FC fabric and cannot be configured on a per-interface basis.



**NOTE:** Session does not refer to end-to-end server-to-storage sessions. There is no limit to the number of end-to-end server-to-storage sessions.

## Priority

---

When the FIP discovery process offers an ENode the choice of more than one FCF-MAC on a given FCF to use for login, the ENode chooses the FCF-MAC to which to send a login request based on the FCF-MAC priority. The lower the priority number, the higher the FCF-MAC's priority. The ENode selects the highest-priority (lowest priority number) FCF-MAC for the login request.

An ENode can receive multiple FCF-MAC advertisements from the same FCF in two ways:



- During the FIP discovery process, an FCF can receive an ENode MAC's multicast discovery solicitation on multiple FCF-MACs. Each FCF-MAC replies with a unicast discovery advertisement to the ENode. The ENode determines that the advertisements are from the same FCF, because the value in the Name\_Identifier descriptor is the same in each advertisement.
- During the FIP discovery process, an ENode MAC can receive unsolicited multicast discovery advertisements from multiple FCF-MACs on the same FCF. The ENode determines that the advertisements are from the same FCF, because the value in the Name\_Identifier descriptor is the same in each advertisement.

On the gateway, you can configure the priority value for an entire fabric or for an individual interface. The default value for both the fabric and the individual interfaces is 128 (the highest priority is 0; the lowest priority is 255).

#### Related Documentation

- [Overview of FIP on page 4384](#)
- [Understanding FIP Functions on page 4408](#)
- [Understanding FIP Implementation on page 4412](#)
- [Understanding Fibre Channel Virtual Links on page 4419](#)
- [Understanding FCoE on page 4392](#)
- [Configuring FIP on an FCoE-FC Gateway on page 4589](#)

## Understanding Fibre Channel Virtual Links

A virtual link emulates a secure point-to-point connection between the virtual node port (VN\_Port) of a Fibre Channel over Ethernet (FCoE) node (ENode) and the virtual fabric port (VF\_Port) of an FCoE forwarder (FCF). The combination of the FCF media access control (MAC) address and the VN\_Port MAC address uniquely identifies each virtual link. Uniquely identifying each virtual link enables the logical separation of traffic that belongs to each virtual link. A single physical link between an ENode and an FCF can carry multiple virtual links and maintain secure, separate transport of traffic on the different virtual links.

Virtual links are necessary because Fibre Channel protocol does not recognize multipoint-to-point connections. Even when multiple connections are aggregated on one physical port, FCoE Initialization Protocol (FIP) presents each virtual link as an individual point-to-point link between an ENode VN\_Port and an FCF VF\_Port.

#### Related Documentation

- [Overview of FIP on page 4384](#)
- [Understanding FIP Functions on page 4408](#)
- [Understanding FIP Implementation on page 4412](#)
- [Understanding FIP Parameters on an FCoE-FC Gateway on page 4416](#)
- [Understanding FCoE on page 4392](#)



## Understanding Interfaces on an FCoE-FC Gateway

When the QFX Series functions as an FCoE-FC gateway to connect FCoE devices on an Ethernet network to a Fibre Channel (FC) switch in a storage area network (SAN), it handles FCoE traffic from hosts and native FC traffic from the FC switch. To support this architecture, each local FC fabric configured on the gateway (in the **fc-fabrics** configuration hierarchy) must have:

- An Ethernet-network-facing F\_Port interface for the FCoE VLAN to connect to FCoE device VN\_Ports in the form of an FCoE VLAN interface. Multiple VF\_Ports are initiated on the F\_Port interface, one VF\_Port for each ENode that logs in to the FC network.
- One or two blocks of six proxy N\_Port (NP\_Port) interfaces to connect to FC switch fabric ports (F\_Ports).

Each FC fabric is local to the gateway on which you configure it. This means that both the FC switch and the FCoE devices must be connected to the same gateway (QFX3500 switch or QFabric system Node device), and that all of the interfaces configured for the local fabric also must be on that gateway. FC fabric traffic does not flow between different Node devices in a QFabric system.

This topic describes:

- [Native FC Interfaces to the FC Switch on page 4420](#)
- [FIP Login Session Limits on page 4422](#)
- [Trusted and Untrusted Interfaces on page 4425](#)
- [Buffer-to-Buffer Credit Recovery on page 4426](#)
- [FCoE VLAN Interface to FCoE Devices on page 4427](#)
- [Assigning Interfaces to a Fibre Channel Fabric on page 4430](#)
- [Deleting a Fibre Channel Interface on page 4430](#)

---

### Native FC Interfaces to the FC Switch

You must configure either 6 or 12 of the physical interfaces on the gateway as native FC NP\_Port interfaces to connect to FC switch F\_Port interfaces. By default, all of the gateway interfaces are Ethernet interfaces, so you must explicitly configure the interfaces that you want to use as FC interfaces.

You can configure the FC-capable ports xe-0/0/0 through xe-0/0/5 as fc-0/0/0 through fc-0/0/5, and ports xe-0/0/42 through xe-0/0/47 as fc-0/0/42 through fc-0/0/47 to create blocks of native FC interfaces. You cannot individually configure a single port as a native FC interface. Within these port blocks, you cannot mix FC interfaces with Ethernet interfaces. All of the ports in a block must be either native FC interfaces or Ethernet interfaces.

You cannot configure ports xe-0/0/6 through xe-0/0/41 and ports xe-0/1/1 through xe-0/1/15 as native FC ports; they can only be Ethernet ports. Native FC ports do not handle Ethernet traffic (including FCoE traffic); they handle only native FC traffic and must connect to native FC ports.



You can configure:

- Six native FC interfaces by configuring either ports xe-0/0/0 through xe-0/0/5 as fc-0/0/0 through fc-0/0/5 or ports xe-0/0/42 through xe-0/0/47 as fc-0/0/42 through fc-0/0/47.
- Twelve native FC interfaces by configuring ports xe-0/0/0 through xe-0/0/5 as fc-0/0/0 through fc-0/0/5 and ports xe-0/0/42 through xe-0/0/47 as fc-0/0/42 through fc-0/0/47.
- No native FC interfaces by leaving ports xe-0/0/0 through xe-0/0/5 and ports xe-0/0/42 through xe-0/0/47 in their default state as Ethernet interfaces.

Each native FC interface can belong to only one local FC fabric configured on the gateway. You can configure up to 12 FC fabrics on a gateway, but each FC fabric must use different native FC interfaces to connect to an FCF. (Although the native FC ports are configured in blocks, each individual port can belong to a different FC fabric.) Native FC interfaces can be configured as loopback interfaces.

- [Port Mode on page 4421](#)
- [NPIV on page 4421](#)
- [Port Speed on page 4422](#)

### **Port Mode**

The gateway presents a proxy N\_Port (NP\_Port) interface to the FC switch. An NP\_Port connects to a single FC switch F\_Port using a point-to-point link (in other architectures an N\_Port can also connect in a point-to-point link to another N\_Port, but that is not a valid configuration on the gateway).

You must explicitly configure each native FC interface connected to an FC switch as an NP\_Port. The gateway NP\_Ports act as a proxy for the FCoE device virtual N\_Ports (VN\_Ports) when the VN\_Ports attempt to connect to the FC switch.

When the FC switch is a trusted switch, configure the fabric as **fcoe-trusted** to reduce overhead caused by the VN\_Port to VF\_Port (VN2VF\_Port) FIP snooping filters that are automatically installed on untrusted ports.

### **NPIV**

FC requires a unique point-to-point link between the FC switch and each host N\_Port. The gateway creates an independent virtual link for each FCoE device session by mapping each FCoE device to a virtualized N\_Port through the gateway's proxy function. This process is called N\_Port ID virtualization (NPIV).

NPIV makes each virtual link look like a dedicated point-to-point link to the FC switch. In this way, multiple FCoE devices, multiple applications, and multiple virtual machines on an FCoE device can connect to an FC switch using one physical port instead of using a physical port for each host connection. The virtual link creates a secure boundary between traffic from different sources that are on a single physical port.



FCoE-FC gateway mode implements NPIV as follows:

1. An NP\_Port on the gateway comes up and logs in to the attached F\_Port on the FC switch. The FC switch sees the gateway port as a physical FC device N\_Port and assigns it a unique FCID. This establishes the physical point-to-point link between the gateway and the FC switch.
2. The gateway receives a FIP discovery message from an FCoE device that seeks to log in to the FC network. To the FCoE device, the gateway presents a virtual F\_Port (VF\_Port) interface and appears to be an FCF.
3. The gateway converts the FCoE device's message into an FC fabric discovery (FDISC) message and sends it through the least-loaded physical NP\_Port to the FC switch. The FDISC message requests an FCID for the new virtual link.
4. The FC switch processes the request, accepts it, assigns a unique FCID for the connection, and sends the response.
5. The gateway maps the FC switch response to the host FCoE device's VN\_Port and sends a FIP acceptance advertisement to the FCoE device.
6. The FCoE device accepts the FCID.

If the FC switch rejects the FDISC, the gateway relays the rejection to the FCoE device VN\_Port.

### **Port Speed**

The gateway supports configuring FC port speeds of 2 Gbps, 4 Gbps, or 8 Gbps. FC ports can also autonegotiate the port speed to 2, 4, or 8 Gbps.

### **FIP Login Session Limits**

---

A FIP login session is a fabric login (FLOGI) or fabric discovery (FDISC) login to the FC SAN fabric. (A session here does not refer to an end-to-end server-to-storage session; there is no limit to the number of end-to-end server-to-storage sessions.) You can limit the maximum number of FIP login sessions on each gateway Node device (QFX3500 switch or QFabric system Node device configured in FCoE-FC gateway mode), on each local gateway FC fabric, and on each individual NP\_Port interface in a local FC fabric:

- Gateway Node devices and Node groups—The total number of FIP login sessions on the gateway Node or Node group (the sum of the sessions on all of the NP\_Port interfaces in all of the local FC fabrics on the gateway Node or Nodes) cannot exceed the limit. When a gateway reaches the maximum session limit, the gateway sends subsequent multicast discovery advertisements (MDAs) with the availability bit set to 0 (zero) to prevent additional ENode login attempts. If the maximum number of sessions is running on the gateway, ENodes cannot use the gateway to log in new sessions to the FC switch. When the number of sessions falls below the maximum, the gateway sets the availability bit in MDAs to 1 so that ENodes can again log in new sessions. When a session slot becomes available, the system accepts the first session request to fill the slot.
- FC fabric—The total number of FIP login sessions on an FC fabric (the sum of the sessions on all of the NP\_Port interfaces that belong to the fabric) cannot exceed the



limit. When a fabric reaches the maximum session limit, the gateway sends MDAs associated with that fabric with the availability bit set to 0 to prevent additional ENode login attempts.



**NOTE:** Other FC fabrics on the same gateway can still accept ENode logins as long as the maximum session limit for those fabrics and the maximum session limit for the gateway (the Node device) have not been met.

- **NP\_Port interfaces**—The total number of FIP login sessions cannot exceed the interface's limit. When an interface reaches the maximum session limit, the gateway removes it from the load-balancing list for that FC fabric to prevent the gateway from attempting to assign new sessions to the interface. Other interfaces in the FC fabric can still accept logins until the FC fabric or gateway reaches its maximum session limit. However, the interface that reached the maximum session limit cannot be assigned new sessions until the number of sessions on the interface falls below the limit.



**BEST PRACTICE:** Configure a maximum session limit for each NP\_Port interface that is less than or equal to the number of FIP sessions the directly connected FC switch port is configured to support. This prevents the gateway from attempting to assign new login sessions to an interface when the connected FC switch port reaches its maximum number of sessions.

- [FCoE Trusted and Untrusted Interface Session Limits on page 4423](#)
- [Configuring Consistent Session Limits on page 4423](#)
- [Decreasing Session Limits on page 4424](#)
- [Increasing Session Limits on page 4425](#)
- [Effect of Deactivating and Then Reactivating the Configuration on Session Limits on page 4425](#)

### ***FCoE Trusted and Untrusted Interface Session Limits***

The maximum number of VN2VF\_Port FCoE login sessions that each gateway can support is 2500 sessions, regardless of whether interfaces are trusted or untrusted. (In software releases earlier than Junos OS Release 12.3, the session limit on untrusted interfaces and untrusted fabrics was 376 sessions.)

### ***Configuring Consistent Session Limits***

The system does not perform commit checks to enforce consistent session limit configuration. For example, the system does not prevent you from configuring a higher limit for ENode sessions than the total session limit for the gateway Node device, or from configuring a higher limit on an interface than on the fabric to which the interface belongs.

To prevent unexpected FIP login rejections, you should configure consistent Node device, fabric, and interface session limits. For example:



- The session limit of an interface should not exceed the session limit of the fabric to which it belongs.
- For interfaces that belong to the same fabric, the sum of the interface session limits should not exceed the fabric session limit.
- The fabric session limit should not exceed the session limit of the gateway Node device.
- For fabrics that belong to the same gateway Node device, the sum of the fabric session limits should not exceed the Node device session limit.

Session limit configuration considerations include:

- The fabric session limit restricts how many sessions can run on the NP\_Port interfaces that belong to that fabric. If the combined session limits of the interfaces exceed the fabric session limit, the total number of sessions on the interfaces is the fabric limit.

For example, if a fabric has three NP\_Port interfaces, and each NP\_Port interface has a limit of 500 sessions (total of 1500 sessions for the three interfaces), but the fabric has a limit of 1000 sessions, the combined number of sessions on the three interfaces is limited to 1000 sessions.

- The gateway Node device session limit restricts how many sessions can run on the fabrics that belong to that gateway. If the combined session limits of the fabrics exceed the gateway Node device session limit, the total number of sessions on the fabrics is the gateway Node device limit.

For example, if a gateway has two fabrics, and each fabric has a limit of 1000 sessions (total of 2000 sessions for the two fabrics), but the gateway has a limit of 1500 sessions, the combined number of sessions on the two fabrics is limited to 1500 sessions.

Hierarchically, the gateway Node device session limit is the maximum limit for all sessions on the gateway, regardless of fabric and interface session limits. In the same way, the fabric session limit supersedes the interface session limit.

When session limits are exceeded, no new logins are accepted until a session slot becomes free.

### ***Decreasing Session Limits***

If you decrease the session limit, the currently logged in sessions are terminated as follows:

- Gateway Node devices and Node groups—Decreasing the session limit terminates all of the sessions on the Node device (all sessions on all interfaces on all fabrics). If the gateway Node device is part of a Node group, all sessions on all members of the Node group are terminated.
- Fabric—Decreasing the session limit terminates all of the sessions on all of the interfaces that belong to the fabric.
- NP\_Port interfaces—Decreasing the session limit terminates all of the sessions on the interface and also terminates all of the sessions on any other interfaces that belong to the same fabric.



After you decrease a session limit, the sessions are terminated even if the new session limit is greater than the number of currently active sessions. For example:

- An interface has 300 active sessions.
- The current session limit is 1000 sessions.
- You decrease the session limit to 500 sessions and commit the new configuration.
- All 300 sessions are logged out, even though the new session limit is greater than the number of sessions running.

After the session limit change takes effect, the ENodes log in again and establish new sessions, up to the new session limits.

### ***Increasing Session Limits***

Increasing the session limits does not disrupt logged in sessions.

### ***Effect of Deactivating and Then Reactivating the Configuration on Session Limits***

If you decrease session limits, all ENodes are logged out. Deactivating and then reactivating the configuration can have the same effect as decreasing the session limit, which results in the ENodes being logged out.

The ENode logouts occur because when you deactivate the configuration, the system reverts to the default session limit of 2500 sessions (the maximum number of sessions). When you reactivate the configuration, the system uses the configured session limit. Unless the configured session limit is equal to the maximum session limit, reactivating the configuration decreases the session limit, which causes the ENodes to be logged out.

For example, if you:

1. Configure and commit a limit of 400 sessions.
2. Allow ENodes to log in and start sessions.
3. Deactivate the configuration.
4. Reactivate the configuration.
5. The ENode sessions are logged out because deactivating the session increased the session limit from 400 to 2500.

Because an increase in the session limit does not affect existing sessions, the running ENode sessions are not affected. However, reactivating the configuration decreased the session limit from 2500 back to 400. The session limit decrease causes the ENode sessions to be logged out.

### ***Trusted and Untrusted Interfaces***

---

By default, gateway fabric interfaces are untrusted interfaces. If you do not configure a gateway fabric as an FCoE trusted fabric to set all of the gateway fabric interfaces as trusted interfaces, the gateway installs VN2VF\_Port FIP snooping filters on the fabric ports.



If you configure a gateway fabric as an FCoE trusted fabric, the gateway does not install VN2VF\_Port FIP snooping filters on the fabric interfaces. This is usually done when the gateway is connected to an FCoE transit switch that has VN2VF\_Port FIP snooping enabled.

Regardless of whether an interface is trusted or untrusted, the maximum session limit is 2500 sessions.



**NOTE:** The session limit for a Node group is the same as the session limit for an individual Node device, 2500 sessions. Even if more than one Node device in a Node group is acting as an FCoE-FC gateway, the total maximum number of sessions on all Node devices in the Node group is 2500 sessions.

The default maximum login session value for Node devices (on QFabric systems, the maximum applies to each Node device), trusted fabrics, and interfaces in trusted fabrics is 2500 sessions.

### Buffer-to-Buffer Credit Recovery

---

Buffer-to-buffer credits represent the number of receive buffers an interface can use to store FC frames. Buffer-to-buffer credit determines buffer-to-buffer flow control. When an interface transmits a frame, it decrements its buffer-to-buffer credit count by one. When the destination interface forwards the frame and frees a buffer, it sends a receiver ready (R\_RDY) primitive to the transmitting interface. Each R\_RDY primitive the transmitting interface receives increments its buffer-to-buffer credit count by one.

Both interfaces on an FC link track buffer-to-buffer credits. As long as buffer-to-buffer credits are available, the transmitter continues to send frames. If the number of buffer-to-buffer credits reaches zero (0), transmission stops until buffer-to-buffer credits are available, as indicated by the reception of an R\_RDY primitive. Buffer-to-buffer credits can compensate for long cable distances to limit throughput and prevent buffer overflow.

However, if frame corruption or errors transmitting R\_RDY primitives occur, the buffer-to-buffer credit counters on the sending and receiving interfaces do not have the same values. This causes the permanent loss of buffer-to-buffer credits. When credits are lost, the buffer credit count can decrement to zero and indicate that there is no available buffer space even if buffer space is actually available. This can result in unnecessary link idle time.

To recover lost buffer-to-buffer credits, you can configure a buffer-to-buffer credit state change number (BB\_SC\_N). BB\_SC\_N must be configured on both ends of the connection. If only one end of the connection is configured for BB\_SC\_N, the feature is disabled. The two directly connected FC interfaces communicate the BB\_SC\_N value during fabric login (FLOGI).

When you enable BB\_SC\_N on the interfaces on both ends of an FC link, the interfaces exchange buffer-to-buffer state change send (BB\_SCs) and buffer-to-buffer state change receive (BB\_SCr) primitives to track the number of frames sent and the number of R\_RDY primitives received. The state change number determines the number of frames and R\_RDY primitives the interfaces exchange between consecutive BB\_SCn primitives and



between consecutive BB\_SCr primitives. The state change primitives inform each interface of the other interface's frame count and R\_RDY count states.

The state counters should match so that each interface knows and agrees with the other interface's state. If the interface at either end of the link detects a discrepancy, it knows that a frame or an R\_RDY primitive was corrupted or dropped.

For example, if a receiving interface has sent two R\_RDY primitives but the BB\_SCr that the interface receives from the sending interface only counts one R\_RDY primitive received, it reveals that one R\_RDY primitive was not delivered successfully and that one buffer-to-buffer credit was lost. When one of the interfaces on the link detects a discrepancy, the interfaces can take corrective action and recover the lost buffer-to-buffer credits.

Enabling the buffer-to-buffer credit recovery feature does not impact buffer resources and has an insignificant impact on processing resources.

If buffer-to-buffer credit recovery is not used, then when there is no buffer credit on a port, a timeout and recovery mechanism prevents buffer overflow.

### FCoE VLAN Interface to FCoE Devices

Each FC fabric configured on the gateway includes at least one FCoE VLAN interface to connect the FCoE devices on the FCoE VLAN to the FC switch. (Including the FCoE VLAN interface and the native FC interfaces in the FC fabric configuration connects them.) FCoE VLANs can include any Ethernet interface on the switch that is in tagged-access or trunk mode. The best practice is to configure Ethernet interfaces that belong to FCoE VLANs in **tagged-access** port mode.



**NOTE:** The Ethernet interfaces that connect to FCoE devices must include a native VLAN to transport FIP traffic, because FIP VLAN discovery and notification frames are exchanged as untagged packets.

FCoE VLANs should carry only FCoE traffic. You should not mix FCoE traffic and standard Ethernet traffic on the same VLAN.



**NOTE:** FCoE VLANs (any VLAN that carries FCoE traffic) support only Spanning Tree Protocol (STP) and link aggregation group (LAG) Layer 2 features.

Each FCoE VLAN interface can belong to only one FC fabric configured on the gateway. A gateway FC fabric can have more than one FCoE VLAN, but each FCoE VLAN in the FC fabric must belong only to that FC fabric. You can configure more than one FC fabric on a gateway; each FC fabric must use different FCoE VLAN interfaces to connect to FCoE devices.





**NOTE:** Storm control must be disabled on all Ethernet interfaces that belong to the FCoE VLAN to prevent FCoE traffic from being dropped.

- [Port Mode on page 4428](#)
- [Disabling Storm Control on FCoE Interfaces on page 4429](#)
- [NPIV Support on page 4430](#)
- [VN2VF\\_Port FIP Snooping on page 4430](#)

### **Port Mode**

You must explicitly configure the FCoE VLAN interface in F\_Port mode. All members of the FCoE VLAN use the FCoE VLAN interface as the connection to the gateway NP\_Port interfaces and ultimately to the FC switch.

All of the 10-Gigabit Ethernet interfaces that are members of an FCoE VLAN should be configured as **tagged-access** port mode interfaces. However, the system also supports configuring these interfaces in **trunk** port mode.



**BEST PRACTICE:** Use **tagged-access** port mode for Ethernet interfaces that are connected to converged network adapters (CNAs) in FCoE access devices.

Use trunk port mode when an Ethernet interface is an interswitch link (ISL)—that is, when the port is connected to another switch. For example, if a port is connected to a transit switch that is performing VN2VF\_Port FIP snooping, configure the port in trunk mode and as an FCoE trusted port.

The **tagged-access** port mode was not available in Junos OS Release 11.3 and earlier releases. In Release 11.3 and earlier, only trunk port mode was used for Ethernet interfaces that belong to an FCoE VLAN. Because **tagged-access** mode is now available, using trunk mode for interfaces connected to FCoE CNAs is not recommended.

If an existing configuration uses trunk mode for ports connected to FCoE CNAs, you can change the port mode to **tagged-access** without disrupting traffic. Although we recommend changing the port mode of these ports from trunk mode to **tagged-access** mode as a best practice, it is not mandatory. New configurations should use **tagged-access** mode for interfaces that connect to FCoE devices.

There are several advantages of configuring Ethernet ports connected to FCoE devices in **tagged-access** mode instead of in **trunk** mode:

- It is standard practice to configure ISL ports as trunk ports.
- It is standard practice not to configure ports that connect to servers as trunk ports.
- When an interface goes down, if that interface is in **trunk** mode, then the FCoE sessions on that interface are terminated only after the gateway stops receiving FIP keepalive



messages from the ENode and exceeds 2.5 times the FIP keepalive timeout advertisement value. If the interface is in **tagged-access** mode and the interface goes down, the gateway sends a FIP message to terminate the sessions on the interface.

- Similarly, if an ENode session moves from one interface to another interface, if the original interface is in **trunk** mode, the session is not removed from the interface until the gateway stops receiving FIP keepalive messages and exceeds 2.5 times the FIP keepalive advertisement timeout value. But if the interface is in **tagged-access** mode, the gateway detects that the session is no longer on the interface, does not refresh the FIP keepalive timer, and thus ages out the session.



**NOTE:** FIP is enabled on the FCoE VLAN, which is a Layer 3 interface. As with other Layer 3 interfaces under Junos OS, when the last member (10-Gigabit Ethernet interface) of the FCoE VLAN is deleted, the FCoE VLAN interface is internally marked as “down.” When the Layer 3 FCoE VLAN interface is marked as “down”, FIP stops running on it. When the last member interface is deleted from an FCoE VLAN and FIP stops running, the result could be an immediate timeout for the VN\_Ports that were connected on that interface, regardless of whether the port mode is **tagged-access** or **trunk**.

### ***Disabling Storm Control on FCoE Interfaces***

Storm control is enabled by default on all interfaces. When a QFX3500 switch or a QFX3500 Node device is acting as an FCoE-FC gateway, disable storm control on the QFX3500 switch or QFX3500 Node device, and if desired, enabled it on ports that are not part of an FCoE-FC gateway VLAN. Storm control is not supported on the FCoE interfaces of an FCoE-FC gateway VLAN. Configuring storm control on an Ethernet interface and including that interface in an FCoE-FC gateway may have undesirable effects, including FCoE packet loss.

You can disable storm control in either of two ways:

- Disable storm control on all interfaces, then enable storm control on the interfaces you want to use storm control. (From the default configuration, you cannot disable storm control on individual interfaces because the default configuration enables storm control on **all** interfaces, not on individual interfaces.)

For example, if you want interfaces xe-0/0/20, xe-0/0/21, and xe-0/0/22 to use storm control, disable storm control on all interfaces, then enable storm control on those three interfaces:

1. Disable storm control on all interfaces:

```
user@switch# delete ethernet-switching-options storm-control interface all
```

2. Enable storm control on interfaces xe-0/0/20, xe-0/0/21, and xe-0/0/22:

```
user@switch# set ethernet-switching-options storm-control interface xe-0/0/20
user@switch# set ethernet-switching-options storm-control interface xe-0/0/21
user@switch# set ethernet-switching-options storm-control interface xe-0/0/22
```

- Disable storm control for all unknown unicast traffic on all interfaces by including the following statement in your configuration:



```
user@switch# set ethernet-switching-options storm-control interface all no-unknown-unicast
```

### ***NPIV Support***

The gateway supports FCoE device NPIV. For example, a single physical FCoE device can have multiple virtual machines running on it. Each virtual machine can instantiate a separate virtual connection to the gateway, which results in its own virtual link to the FC switch. In this way, an FCoE device can have multiple separate connections to the FC SAN on a single physical port.

This is similar to the NPIV function the gateway performs with the FC switch to support multiple virtual FCoE device connections on one physical NP\_Port.

The gateway presents multiple VF\_Port interfaces on each FCoE VLAN interface to support the requirement for unique, secure virtual links.

### ***VN2VF\_Port FIP Snooping***

The FCoE-facing ports that belong to an FCoE VLAN on a gateway are enabled for VN2VF\_Port FIP snooping automatically. You can disable VN2VF\_Port FIP snooping on any individual interface by configuring it as a trusted interface.

### ***Assigning Interfaces to a Fibre Channel Fabric***

---

You assign at least one FCoE VLAN interface and at least one native FC interface to each FC fabric you configure on the gateway. All of the interfaces that belong to an FC fabric must reside on the same gateway device. Interfaces on different gateways cannot belong to the same FC fabric, because an FC fabric is local to a single gateway device.

### ***Deleting a Fibre Channel Interface***

---

To delete an FC interface or an FCoE VLAN interface, you must delete the interface from the fabric first and then delete the interface from the switch.

#### **Related Documentation**

- [Overview of Fibre Channel on the QFX Series on page 4380](#)
- [Understanding Fibre Channel on page 4385](#)
- [Understanding Load Balancing in an FCoE-FC Gateway Proxy Fabric on page 4431](#)
- [Understanding FCoE-FC Gateway Benefits](#)
- [Configuring a Physical Fibre Channel Interface on page 4578](#)
- [Configuring a Fibre Channel Interface on page 4579](#)
- [Disabling VN2VF\\_Port FIP Snooping on an FCoE-FC Gateway Switch Interface on page 4598](#)
- [Assigning Interfaces to a Fibre Channel Fabric on page 4584](#)
- [Configuring an FCoE VLAN Interface on page 4582](#)
- [Disabling Storm Control on FCoE Interfaces on an FCoE-FC Gateway on page 4586](#)
- [Disabling VN2VF\\_Port FIP Snooping on an FCoE-FC Gateway Switch Interface on page 4598](#)
- [Deleting a Fibre Channel Interface on page 4585](#)



- [Setting the Maximum Number of FIP Login Sessions per FC Interface on page 4593](#)
- [Setting the Maximum Number of FIP Login Sessions per FC Fabric on page 4594](#)
- [Setting the Maximum Number of FIP Login Sessions per Node Device on page 4595](#)
- [Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495](#)
- [Understanding Fibre Channel Terminology on page 4483](#)

## Understanding Load Balancing in an FCoE-FC Gateway Proxy Fabric

You can balance or rebalance the load on the ports in an FCoE-FC gateway proxy fabric in order to avoid overutilizing or underutilizing the links. Load balancing is distributing sessions across the available native Fibre Channel (FC) interfaces (NP\_Ports) that belong to a local gateway FC fabric to create a relatively equal load on all the fabric links. Load rebalancing is redistributing the existing sessions across the available NP\_Port links on a local gateway FC fabric.



**NOTE:** A session is a fabric login (FLOGI) or fabric discovery (FDISC) login to the FC SAN fabric. Session does not refer to end-to-end server-to-storage sessions.

The fabric-facing NP\_Port links of an FCoE-FC gateway use different load-balancing methods than the FCoE-network-facing Ethernet links. You can balance the load on the FCoE-network facing Ethernet port members of the FCoE-FC gateway by configuring the ports in a link aggregation group (LAG). This topic focuses on NP\_Port load balancing.

Balancing the load on FCoE-FC gateway NP\_Port links consists of two steps:

1. Choosing the algorithm used to balance and rebalance the link load
2. Choosing whether to rebalance link loads automatically or only when you explicitly request a rebalance (load-rebalancing method)

You can configure a different load-balancing algorithm and use a different rebalancing method for each local FC fabric on the FCoE-FC gateway. The load-balancing algorithm and automated rebalancing, if configured, apply to all NP\_Port interfaces in the local FC fabric.

This topic describes:

- [Load-Balancing Algorithms on page 4432](#)
- [Load-Rebalancing Methods on page 4436](#)
- [NP\\_Port Interface FIP Session Limit Effect on Load Balancing on page 4437](#)
- [Load-Balancing Triggers and Timing on page 4437](#)
- [Load Rebalancing Behavior When a Link Goes Down on page 4439](#)
- [Interface Load Calculation Algorithm on page 4440](#)



- [Load-Balancing Scenarios on page 4441](#)
- [Load Balancing on the FCoE Interfaces \(Ethernet Links\) on page 4446](#)

### Load-Balancing Algorithms

---

You can choose one of three load-balancing algorithms to configure the way the switch balances the link loads. The switch uses the configured algorithm to balance the link loads when NP\_Ports are initialized and whenever link loads are rebalanced. Regardless of whether you configure automated load rebalancing or use on-demand load rebalancing, the switch uses the configured algorithm to balance the link load:

- **Simple load balancing**—The switch assigns each ENode FLOGI session and VN\_Port FDISC session to the least-loaded link. The switch can place FDISC sessions on a different link than the parent FLOGI session (an ENode FLOGI session and its subsequent FDISC sessions can be placed on different links). Simple load balancing is the default load-balancing algorithm. Rebalancing the link load disrupts only selected sessions to minimize the impact (the switch uses an algorithm to log out only the sessions that need to be moved to other links to balance the load when those sessions log in again).
- **ENode-based load balancing**—When an ENode logs in to the fabric, the switch places all subsequent VN\_Port FDISC sessions associated with that ENode on the same link as the ENode FLOGI session, regardless of the link load. New ENode FLOGIs are placed on the least-loaded link. The switch calculates the link load based on the combined total of FLOGIs and FDISCs on each NP\_Port link. Rebalancing the link load disrupts all sessions (all sessions log out and then log in again).
- **FLOGI-based load balancing**—Similar to ENode-based load balancing; when an ENode logs in to the fabric, the switch places all subsequent VN\_Port FDISC sessions associated with that ENode on the same link as the ENode FLOGI session, regardless of the link load. New ENode FLOGIs are placed on the least-loaded link.

One difference between ENode-based load balancing and FLOGI-based load balancing is that the switch calculates the link load based only on the number of FLOGIs on each NP\_Port link. The algorithm does not count FDISCs. Another difference is that instead of disrupting all sessions on a link load rebalance, the system disrupts only selected sessions to minimize the impact (the switch uses an algorithm to log out only the sessions that need to be moved to other links to balance the load when those sessions log in again).



**NOTE:** Changing the load-balancing algorithm when FCoE sessions are running forces the FCoE sessions to log out and then log in again.

---

If you do not explicitly configure the load-balancing algorithm, the switch uses simple load balancing by default on the all NP\_Port interfaces that belong to a given local FC fabric.



The following sections describe how each algorithm works, its advantages and disadvantages, and what happens when NP\_Port links come up for the first time, when an NP\_Port link is added to existing links, and when you rebalance the link load:

- [Simple Load Balancing on page 4433](#)
- [ENode-Based Load Balancing on page 4434](#)
- [FLOGI-Based Load Balancing on page 4434](#)
- [Load-Balancing Algorithm Comparison on page 4435](#)

### **Simple Load Balancing**

Simple load balancing provides the most equal load balancing across links because each VN\_Port FDISC session can be assigned to the least-loaded link, regardless of whether the parent ENode FLOGI session is on that link. (The parent ENode is the ENode that originates the logins to the fabric. After the parent ENode logs in, the VN\_Ports on that ENode can log in to the fabric using FDISC.)

The FCoE-FC gateway performs simple load balancing by default on the NP\_Ports that connect the gateway to the FC SAN. When an ENode sends a FLOGI request to the gateway, the gateway checks the NP\_Ports that connect it to the FC SAN and assigns the new session to the least-loaded link.

Every time an ENode sends a FLOGI or an FDISC request, the gateway assigns the new session to the least-loaded NP\_Port link. After the gateway assigns an ENode FLOGI session to an NP\_Port, subsequent FDISC requests by the same ENode can result in sessions being assigned to different NP\_Ports, because the gateway always assigns the new session to the least-loaded interface.



**NOTE:** Because VN\_Port sessions might be placed on a different link than their parent ENode, if the link that contains the ENode goes down, only the ENode session and any of its VN\_Port sessions that are on that link go down. VN\_Port sessions on other links remain active as long as the link is up and the VN\_Port is not logged out.

When a new link comes up, the switch logs out enough sessions so that when the sessions log in again, they are placed on the new link and the link loads are balanced. The switch uses an algorithm to log out sessions in the least disruptive manner by first logging out FDISCs whose FLOGI is not on the same link, then the least-loaded FLOGIs (loaded in terms of related FDISC logins).

Similarly, when you rebalance an existing link load, the switch logs out only enough sessions so that when the sessions log in again, they balance the load on the existing links. In this case (rebalance without a new link up), the switch takes into account the dependencies between FLOGIs and FDISCs when selecting sessions to log out.

The simple load-balancing algorithm uses the sum of the FLOGI and FDISC sessions to determine the session load on each link for both initial load balancing and load rebalancing.



### ***ENode-Based Load Balancing***

ENode-based load balancing can result in a less balanced load across the NP\_Port links because the VN\_Port FDISC sessions are assigned to the same link as the parent ENode FLOGI session, regardless of how many FDISC sessions are associated with the ENode. However, ENode-based load balancing has the advantage of keeping all of the sessions associated with a particular ENode on one link, which provides better control and predictability.

When you use the ENode-based load-balancing algorithm, the gateway assigns the ENode to an NP\_Port link when the ENode sends its FLOGI message to the gateway. The gateway places the ENode session on the least-loaded link at that time. The VN\_Port FDISC sessions associated with an ENode are placed on the same link as the ENode FLOGI session, regardless of the link load. Essentially, the ENode sessions are load-balanced, but the VN\_Port sessions are not.

ENode-based load balancing ensures that each ENode and its associated VN\_Port sessions are assigned to the same NP\_Port link. ENode-based load balancing provides more control and predictability and ensures that if the link carrying an ENode goes down, all of the ENodes associated VN\_Port sessions also go down.

The disadvantage of ENode-based load balancing is that if one ENode has a large number of sessions and the other ENodes do not, the link that carries the ENode with the large number of sessions might have a much larger load than the other NP\_Port links in the gateway proxy fabric.

For example, if a gateway fabric has two NP\_Ports connected to the FC fabric, and two ENodes log in to the fabric, one ENode session is placed on each link. If two VN\_Port sessions are initiated on one of the ENodes, those sessions are placed on the same link as the parent ENode. If 1000 VN\_Port sessions are initiated on the other ENode, all of the 1000 VN\_Port sessions are placed on the same link as that ENode. In this case, one link has 3 sessions (1 ENode FLOGI session and 2 VN\_Port FDISC sessions) and the other link has 1001 sessions (1 ENode FLOGI session and 1000 VN\_Port FDISC sessions).

When a new link comes up or when you rebalance an existing load, the switch logs out all sessions (FLOGIs and FDISCs) in the fabric. As the sessions log in again, the switch assigns them to NP\_Ports in a balanced manner, with all FDISCs assigned to the same link as the parent FLOGI. A new link coming up or a rebalance disrupts all of the existing sessions.

The ENode-based load-balancing algorithm uses the sum of the FLOGI and FDISC sessions to determine the session load on each link for both initial load balancing and load rebalancing.

### ***FLOGI-Based Load Balancing***

FLOGI-based load balancing is similar to ENode-based load balancing in most ways:



- It can result in a less balanced load across the NP\_Port links because the VN\_Port FDISC sessions are assigned to the same link as the parent ENode FLOGI session, regardless of how many FDISC sessions are associated with the ENode.
- When an ENode logs in with a FLOGI, the gateway places the session on the least-loaded link, and the FDISC logins associated with the FLOGI are placed on the same link, regardless of link load.
- Provides control and predictability because each ENode and its associated VN\_Port (FDISC) sessions are assigned to the same link, so if the link an ENode is on goes down, all of its associated sessions also go down.
- If one ENode has a large number of sessions and the other ENodes do not, the link that carries the ENode with the large number of sessions might have a much larger load than the other NP\_Port links in the gateway proxy fabric.

FLOGI-based load balancing differs from ENode-based load balancing in two important ways:

1. The switch uses the sum of the FLOGI sessions on a link to determine the link load. The switch does not use FDISC sessions when calculating the number of sessions on a link. (ENode-based load balancing uses the sum of the FLOGI and FDISC sessions to calculate the number of sessions on a link.)
2. When a new link comes up or when you rebalance an existing load, the switch logs out enough FLOGI (and FDISC) sessions so that when the FLOGI sessions log in again, the load is balanced. The switch balances the load based only on the number of FLOGI sessions, not the sum of FLOGI and FDISC sessions. However, the FDISC sessions associated with a FLOGI follow the FLOGI to the new link if the FLOGI session is part of the rebalancing.

The FLOGI-based load-balancing algorithm uses only the FLOGI sessions to determine the session load on each link for both initial load balancing and load rebalancing.

#### ***Load-Balancing Algorithm Comparison***

[Table 304 on page 4435](#) compares the three load-balancing algorithms and summarizes their differences, advantages, and disadvantages.

**Table 304: Load-Balancing Algorithm Comparison**

| Load-Balancing Algorithm   | Session Assignment                                                            | Session Disruption on Rebalance                                                                                           | Session Count Method            | Advantages                                                                                                                                                                                               | Disadvantages                                                                               |
|----------------------------|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| Simple (default algorithm) | FDISC sessions can be placed on different links than the parent FLOGI session | Minimum number of selected sessions logged out (FDISC sessions can be logged out independent of the parent FLOGI session) | Sum of FLOGI and FDISC sessions | <ul style="list-style-type: none"> <li>• Most equal session distribution across links</li> <li>• Minimum number of sessions logged out when rebalancing</li> <li>• Least disruptive algorithm</li> </ul> | <ul style="list-style-type: none"> <li>• Less session control and predictability</li> </ul> |



Table 304: Load-Balancing Algorithm Comparison (*continued*)

| Load-Balancing Algorithm | Session Assignment                                                            | Session Disruption on Rebalance                                                                                        | Session Count Method                                                   | Advantages                                                                                                                                                                                                                | Disadvantages                                                                                                                                                                                                                 |
|--------------------------|-------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ENode-based              | FDISC sessions are always placed on the same link as the parent FLOGI session | All sessions are logged out                                                                                            | Sum of FLOGI and FDISC sessions                                        | <ul style="list-style-type: none"> <li>Better session control and predictability (on link down, all sessions associated with an ENode go down)</li> </ul>                                                                 | <ul style="list-style-type: none"> <li>Most disruptive algorithm; all sessions logged out on rebalance</li> <li>Might result in less balanced link load because FDISCs are placed on the same link as parent FLOGI</li> </ul> |
| FLOGI-based              | FDISC sessions are always placed on the same link as the parent FLOGI session | Minimum number of selected sessions logged out (but FDISC sessions logged out when parent FLOGI session is logged out) | FLOGI sessions only (FDISC sessions not included in the session count) | <ul style="list-style-type: none"> <li>Better session control and predictability (on link down, all sessions associated with an ENode go down)</li> <li>Minimum number of sessions logged out when rebalancing</li> </ul> | <ul style="list-style-type: none"> <li>Might result in less balanced link load because FDISCs are placed on the same link as parent FLOGI</li> </ul>                                                                          |

### Load-Rebalancing Methods

The load-rebalancing method determines the way the system redistributes sessions to balance the load on the NP\_Ports that belong to a local FC fabric on an FCoE-FC gateway.

You can rebalance the existing load on existing NP\_Port links using either of two methods:

- Automated load rebalancing—When a load rebalancing trigger occurs, the switch automatically rebalances the link loads by redistributing the sessions across the active NP\_Port links. There are three possible load rebalancing triggers:

- When you enable automated load rebalancing, the switch checks the load balance on the existing NP\_Port links. If the links are already balanced, the switch does not rebalance the link load. If the links are not balanced, the switch rebalances the link loads using the configured load-balancing algorithm.

Enabling automated load rebalancing causes sessions to be logged out in accordance with the configured load-balancing algorithm if the link load is unbalanced. If the link load is already balanced when you enable automated load rebalancing, the links are not rebalanced. (Disabling automated load rebalancing is not disruptive because the link load is already balanced.)

- When a new NP\_Port link comes up on a local FCoE-FC gateway fabric, the switch rebalances the link load using the configured load-balancing algorithm if automated load balancing is enabled.
- When the port speed is changed (unless the port speed change does not change the actual port speed, for example, changing the port speed from auto to 8 Gbps).



Use automated load rebalancing if you want link loads to be rebalanced automatically when a load-balancing trigger occurs, instead of at times of your choosing. Keep in mind that load rebalancing is a disruptive event (sessions are logged out).

- On-demand load rebalancing—You choose when to rebalance the NP\_Port links by explicitly requesting a load rebalance using an operational command. The system rebalances the link load only when you issue the rebalancing command.

Use on-demand load rebalancing if you only want to rebalance the link load once or if you want to rebalance the link loads at controlled times instead of automatically.

You can also request a load rebalancing *dry run*. A dry run simulates rebalancing and lists the sessions that might be affected if you choose to perform an actual load-rebalancing operation. The link loads are not rebalanced when you request a dry run.

### NP\_Port Interface FIP Session Limit Effect on Load Balancing

The maximum number of FIP login sessions configured for each NP\_Port interface affects load balancing. When an interface reaches its maximum number of FIP login sessions, that interface is removed from the list of interfaces used for load balancing. The other interfaces in the gateway fabric continue to accept ENode login sessions until they reach their configured maximum session limit. Only interfaces that have not reached their maximum session limit are included in the load-balancing calculations.



**NOTE:** If all NP\_Port interfaces in a gateway fabric reach their FIP login session limits, the fabric sends subsequent multicast discovery advertisements (MDAs) with the availability bit set to 0 (zero) to prevent additional ENode login attempts. While the maximum number of sessions is running on the gateway fabric, ENodes cannot use that fabric to log in to the FC switch. When the number of sessions falls below the maximum, the gateway sets the availability bit in MDAs to 1 so that ENodes can log in to the fabric again.

### Load-Balancing Triggers and Timing

Several events trigger load balancing. Some of the events trigger load balancing only when automated load balancing is enabled. Other events trigger load rebalancing whether or not automated rebalancing is enabled.

This section describes the load-balancing triggers, what happens when the trigger action occurs, and how the switch determines if and when to balance the link load:

- [Load-Balancing Triggers on page 4437](#)
- [Load-Balancing Timer on page 4438](#)

#### **Load-Balancing Triggers**

[Table 305 on page 4438](#) describes the four different events can trigger load balancing or load rebalancing. In every case, link load rebalancing uses the configured load-balancing algorithm to determine the placement of sessions on links.



Table 305: Load-Balancing Triggers and Actions

| Trigger Event                                          | Action                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| New link comes up                                      | <p>Triggers a load-rebalancing operation regardless of whether or not automated load rebalancing is enabled. (The new link has no sessions, so the sessions on other links must be redistributed to balance the load.)</p> <p>The link load is not rebalanced if there are no sessions on the existing links or if there are so few sessions on the existing links that they cannot be redistributed.</p>                                       |
| On-demand load rebalancing request issued from CLI     | <p>The switch checks the NP_Port link load. If the load is not balanced across the links, the switch rebalances the link load. If the load is already balanced, nothing happens.</p> <p><b>NOTE:</b> Requesting a dry run displays sessions that might be disrupted if you rebalance the link load, but does not rebalance the link load.</p>                                                                                                   |
| Automated load balancing configured for the first time | <p>The switch checks the NP_Port link load. If the load is not balanced across the links, the switch rebalances the link load. If the load is already balanced, nothing happens.</p>                                                                                                                                                                                                                                                            |
| NP_Port speed change                                   | <p>If automated rebalancing is enabled, changing the port speed brings the port up and down (flaps the port) and causes the switch to rebalance the link loads. If the port speed change does not change the actual port speed (for example, changing the port speed from <i>auto</i> to 8 Gbps), the link loads are not rebalanced.</p> <p>If automated rebalancing is not enabled, port speed changes do not cause link load rebalancing.</p> |



**NOTE:** When an NP\_Port link goes down, it does not trigger load rebalancing. The loads on the remaining active links are already balanced, and as the sessions logged out from the down link log in again, they are they assigned to links in a balanced manner determined by the configured load-balancing algorithm.

### Load-Balancing Timer

When you trigger load balancing from the CLI, the load-balancing action occurs immediately after you execute the command. However, when a load-balancing trigger occurs that is not a CLI command, the switch does not balance the link loads immediately. Instead, the switch follows an intelligent timer process:

1. The switch checks the current load balance on the NP\_Port links in the local gateway FC fabric. If the load is already balanced, the switch does nothing, and there is no session disruption.
2. If the check shows that the link load is not balanced, the switch starts a 10-second timer. If no other load-balancing triggers occur during the 10-second interval, the switch rebalances the load.



If another load-balancing trigger occurs during the 10-second interval, the timer resets to 10 seconds. The 10-second timer prevents the switch from performing multiple disruptive load-rebalancing actions in a short period of time.



**NOTE:** The switch processes new sessions that log in after the timer starts in the normal manner. The new sessions are considered in the load-balancing evaluation and operation.

3. At a maximum of 30 seconds after the first load-balancing trigger occurs, the switch checks the link load balance again. If the links are already balanced, the switch cancels the load-rebalancing operation. If the links are not balanced, the switch rebalances the link loads.



**NOTE:** If the trigger event that started the load-rebalancing timer is no longer valid when the timer elapses, the switch cancels the rebalancing operation. For example, if a new NP\_Port link comes up and triggers the timer, then goes down before the timer expires, the original link up event is no longer valid, and the switch cancels the rebalancing operation (unless another valid rebalancing trigger occurs in that time frame).

When a link load rebalancing operation is in progress, the switch defers any load-rebalancing triggers that occur until the load-rebalancing operation is complete. The new rebalancing operation begins after the current rebalancing operation finishes if a check shows that rebalancing is required.

If you explicitly request load rebalancing from the CLI using the **request fibre-channel proxy load-rebalance** operational command, the switch rejects the command and displays an error message stating that rebalancing is already in progress.

### Load Rebalancing Behavior When a Link Goes Down

If an NP\_Port link goes down, the ENode and VN\_Port sessions on that link are logged out. The ENodes and VN\_Port sessions log in again and are assigned to NP\_Port links based on the link load and the load-balancing algorithm. If a link goes down, the switch does not rebalance the remaining load on the remaining links to avoid disrupting the existing ENode and VN\_Port sessions. (Also, it is not necessary to rebalance the links in that manner because after a link goes down, the sessions on the remaining links are already balanced. As the logged out sessions log back in, the switch places them on the remaining active links in a balanced manner, according to the configured load-balancing algorithm.)



**NOTE:** When you use the simple load-balancing algorithm, an ENode and its associated VN\_Port sessions might be on different links. In that case, if the NP\_Port with the ENode goes down, only the VN\_Ports on the same link are logged out. VN\_Ports on other links remain up and running.



## Interface Load Calculation Algorithm

A weighted round-robin (WRR) algorithm determines the interface load based on:

- The current number of sessions on the interface



**NOTE:** The configured load-balancing algorithm determines how the switch counts the number of sessions. For simple and ENode-based load balancing, the number of sessions is the sum of the FLOGI and FDISC sessions on each link. For FLOGI-based load balancing, the number of sessions is the sum of the FLOGI sessions on each link.

- The interface weight, which is the speed of the Fibre Channel link (2 Gbps, 4 Gbps, or 8 Gbps)

The interface load algorithm is:

$$(\text{number-of-sessions} * \text{max-weight}) / \text{weight}$$

where *max-weight* is an internal constant.

If the load on the FC interfaces is equal, the session is assigned to the interface with the highest link speed (the greatest weight).

For example, if the three FC interfaces have the characteristics shown in [Table 306 on page 4440](#), the loads of the interfaces are not equal:

**Table 306: FC Interface Session-Based Load-Balancing Characteristics for Unequal Loads**

| Interface | Number of Sessions | Weight (Speed) |
|-----------|--------------------|----------------|
| fc-0/0/0  | 4                  | 4 Gbps         |
| fc-0/0/1  | 1                  | 2 Gbps         |
| fc-0/0/2  | 8                  | 8 Gbps         |

In this example, interfaces fc-0/0/0 and fc-0/0/2 have a greater load than fc-0/0/1. For simple load balancing, the gateway assigns the next new FLOGI or FDISC to fc-0/0/1 because it is the least-loaded interface. For both ENode-based and FLOGI-based load balancing, the gateway assigns the next new FLOGI to fc-0/0/1 because it is the least-loaded interface. Then all VN\_Port FDISCs from that ENode follow the ENode FLOGI and are also assigned to fc-0/0/1 regardless of the link load.

For another example, if the three FC interfaces have the characteristics shown in [Table 307 on page 4441](#), the loads of the interfaces are equal:



**Table 307: FC Interface Session-Based Load-Balancing Characteristics for Equal Loads**

| Interface | Number of Sessions | Weight (Speed) |
|-----------|--------------------|----------------|
| fc-0/0/0  | 4                  | 4 Gbps         |
| fc-0/0/1  | 2                  | 2 Gbps         |
| fc-0/0/2  | 8                  | 8 Gbps         |

In this case, all interfaces have the same relative load. For simple load balancing, the gateway assigns the next new FLOGI or FDISC to fc-0/0/2 because although the loads of the three interfaces are equal, fc-0/0/2 has the greatest weight. For both ENode-based and FLOGI-based load balancing, the gateway assigns the next new FLOGI to fc-0/0/2, and all VN\_Port FDISCs from that ENode follow the ENode FLOGI and are also assigned to fc-0/0/2 regardless of the link load.

After the gateway establishes a session between an ENode or a VN\_Port and an FC switch on an NP\_Port, the session remains on that NP\_Port until the ENode or VN\_Port performs a LOGO.

If the physical FC interface link goes down, the FLOGI and FDISC sessions on the down link are logged out. The ENodes and VN\_Ports log in again to start new sessions on other NP\_Ports in the local gateway FC fabric in accordance with the configured load-balancing algorithm (assuming there is more than one NP\_Port connected to the FC fabric).

### Load-Balancing Scenarios

The configured load-balancing algorithm, the sequence in which ENodes log in to the FC network, the current session count (number of sessions per interface) and the interface speed determine the way the session load is balanced across the native FC interfaces (NP\_Ports) in a gateway FC fabric. Whether you are balancing the link load for the first time or rebalancing an existing link load, the way the load is distributed across the active links is the same.



**NOTE:** The way the switch counts the number of sessions on a port depends on the load-balancing algorithm. For simple and ENode-based load balancing, the sum of the FLOGI and FDISC sessions equals the session count. For FLOGI-based load balancing, only the FLOGI sessions are counted in the total session count.


The following scenarios demonstrate how sessions are assigned to links for each load-balancing algorithm:

- [Simple Load-Balancing Algorithm Scenario on page 4442](#)
- [ENode-Based Load-Balancing Algorithm Scenarios on page 4443](#)
- [FLOGI-Based Load-Balancing Algorithm Scenarios on page 4444](#)



All of the scenarios use the topology shown in [Figure 167 on page 4442](#).

**Figure 167: Sample Load-Balancing Topology**

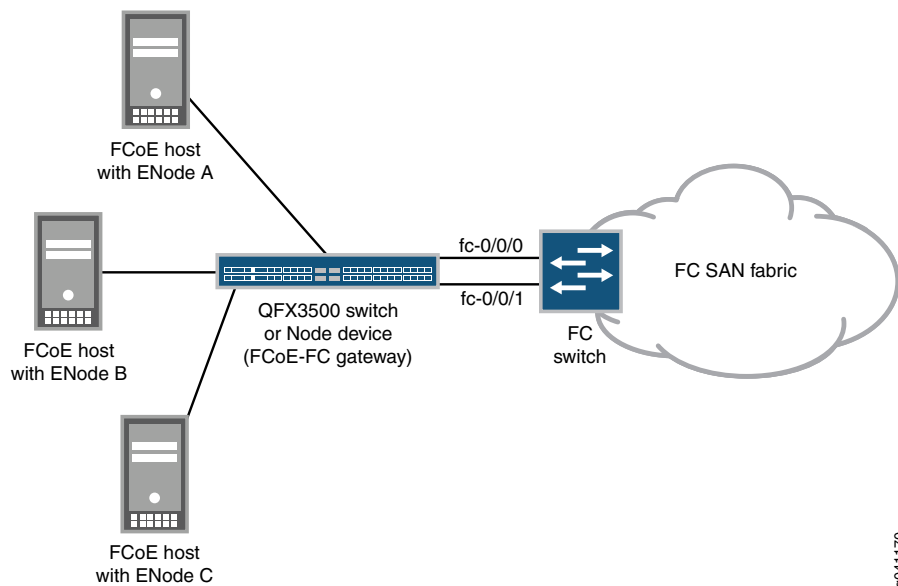

#### **Simple Load-Balancing Algorithm Scenario**

Simple load balancing results in the most equal load distribution among the NP\_Ports connected to an FC SAN fabric because VN\_Port FDISC sessions do not need to “follow” the parent ENode FLOGI session on the same link between the gateway and the FC fabric. When a new FLOGI or FDISC session is initiated, it is assigned to the least-loaded link.

The simple load-balancing algorithm example uses the topology shown in [Figure 167 on page 4442](#) and has the following characteristics:

- QFX Series configured as an FCoE-FC gateway
- Two gateway NP\_Ports, **fc-0/0/0** and **fc-0/0/1**, connected to an FC SAN fabric switch at a speed of 8 Gbps
- Three ENodes, ENode\_A, ENode\_B, and ENode\_C connected to the gateway
- NP\_Ports **fc-0/0/0** and **fc-0/0/1**, and ENode\_A, ENode\_B, and ENode\_C, belong to the same local FC fabric on the gateway

When the NP\_Ports initialize, they send FLOGI messages to the FC switch and log in to the FC SAN fabric. The gateway then advertises the fabric to the ENodes on the Ethernet side of the network. At this point, the load on both of the NP\_Ports is equal. Now the ENodes and VN\_Ports start to log in to the fabric:

1. ENode\_A sends a FLOGI to log in to the fabric. Because the loads on the two NP\_Ports are equal, the session for ENode\_A is randomly placed on one of the links. In this example, the ENode\_A FLOGI session is placed on port **fc-0/0/0**.
2. ENode\_B logs in. Because the load is less on port **fc-0/0/1**, the ENode\_B FLOGI session is placed on port **fc-0/0/1**.



3. ENode\_C logs in. Because the link loads are equal, the ENode\_C login session is randomly placed on one of the links. In this example, the ENode\_C login session is placed on port **fc-0/0/0**.
4. A VN\_Port on ENode\_A sends an FDISC to log in to the fabric. Because port **fc-0/0/1** currently is the least-loaded link, the VN\_Port session is placed on port **fc-0/0/1**, even though its parent ENode session is on port **fc-0/0/0**.
5. As each new VN\_Port session comes up, it is placed on the least-loaded link, regardless of the link on which its parent ENode session is placed.

### ***ENode-Based Load-Balancing Algorithm Scenarios***

ENode-based load balancing ensures that VN\_Port FDISC sessions are placed on the same link as their parent ENode FLOGI sessions, regardless of the link load. ENode-based load balancing can result in a less-balanced load among the NP\_Port links, but it provides the control and predictability of keeping ENodes and their VN\_Port sessions on the same link.

The examples in this section use the topology shown in [Figure 167 on page 4442](#).

- QFX Series configured as an FCoE-FC gateway
- Two gateway NP\_Ports, **fc-0/0/0** and **fc-0/0/1**, connected to an FC SAN fabric switch at a speed of 8 Gbps
- Three ENodes connected to the gateway:
  - ENode\_A, which has 2 VN\_Port FDISC sessions
  - ENode\_B, which has 20 VN\_Port FDISC sessions
  - ENode\_C, which has 100 VN\_Port FDISC sessions
- NP\_Ports **fc-0/0/0** and **fc-0/0/1**, and ENode\_A, ENode\_B, and ENode\_C, belong to the same local FC fabric on the gateway

When the NP\_Ports initialize, they send FLOGI messages to the FC switch and log in to the FC SAN fabric. The gateway then advertises the fabric to the ENodes on the Ethernet side of the network. At this point, the load on both of the NP\_Ports is equal. Now the ENodes and VN\_Ports start to log in to the fabric. As the following two scenarios show, how these sessions are placed on the links depends on the sequence in which they log in to the fabric.

#### **Scenario 1:**

1. ENode\_A sends a FLOGI to log in to the fabric. Because the loads on the two NP\_Ports are equal, the session for ENode\_A is randomly placed on one of the links. In this example, the ENode\_A FLOGI session is placed on port **fc-0/0/0**.
2. ENode\_B logs in. Because the load is less on port **fc-0/0/1**, the ENode\_B FLOGI session is placed on port **fc-0/0/1**.
3. The two VN\_Ports on ENode\_A log in to the fabric. Their sessions are placed on port **fc-0/0/0**, following ENode\_A on the link. Now port **fc-0/0/0** has a greater load (one FLOGI session plus two FDISC sessions) than port **fc-0/0/1** (one FLOGI session).



4. The 20 VN\_Ports on ENode\_B log in to the fabric. Their sessions are placed on port **fc-0/0/1**, following ENode\_B on the link. Now port **fc-0/0/0** has a lesser load (one FLOGI, two FDISC) than port **fc-0/0/1**.
5. ENode\_C logs in. Because the load is less on port **fc-0/0/0**, the ENode\_C FLOGI session is placed on port **fc-0/0/0**.
6. The 100 VN\_Ports on ENode\_C log in to the fabric. Their sessions follow the ENode\_C session onto port **fc-0/0/0**.
7. If more VN\_Ports come up, their FDISC sessions are placed on the same link as the corresponding parent ENode session.

#### Scenario 2:

1. ENode\_A sends a FLOGI to log in to the fabric. Because the loads on the two NP\_Ports are equal, the session for ENode\_A is randomly placed on one of the links. In this example, the ENode\_A FLOGI session is placed on port **fc-0/0/0**.
2. ENode\_B logs in. Because the load is less on port **fc-0/0/1**, the ENode\_B FLOGI session is placed on port **fc-0/0/1**.
3. The two VN\_Ports on ENode\_A log in to the fabric. Their sessions are placed on port **fc-0/0/0**, following ENode\_A on the link. Now port **fc-0/0/0** has a greater load (one FLOGI session plus two FDISC sessions) than port **fc-0/0/1** (one FLOGI session).
4. In this step, the login sequence in Scenario 2 differs from the login sequence in Scenario 1, resulting in a different placement of sessions on the links, and therefore a different load on the links. ENode\_C logs in before the ENode\_B VN\_Ports log in, which changes the session count on the links compared to the first scenario. Because the load in this scenario is less on port **fc-0/0/1**, the ENode\_C FLOGI session is placed on port **fc-0/0/1** (instead of port **fc-0/0/0** as in the first scenario).
5. The 20 VN\_Ports on ENode\_B log in to the fabric. Their sessions are placed on port **fc-0/0/1**, following ENode\_B on the link. Now port **fc-0/0/0** carries one FLOGI and two FDISC sessions, and port **fc-0/0/1** carries two FLOGI and 20 FDISC sessions.
6. The 100 VN\_Ports on ENode\_C log in to the fabric. Their sessions follow the ENode\_C session onto port **fc-0/0/1**. Now port **fc-0/0/1** carries 2 FLOGI and 120 FDISC sessions, whereas port **fc-0/0/0** carries one FLOGI and two FDISC sessions.
7. If more VN\_Ports come up, their FDISC sessions are placed on the same link as the corresponding parent ENode session.

Because of the sequence of ENode logins in Scenario 2, port **fc-0/0/1** carries a greater load than port **fc-0/0/0**. If the simple load-balancing algorithm had been used, the FLOGI and FDISC sessions would be allocated to the two links evenly. However, because the FDISC sessions are placed on the same link as their parent FLOGI sessions, this example demonstrates how using the ENode-based load-balancing algorithm can lead to scenarios in which the link loads are not equal.

#### *FLOGI-Based Load-Balancing Algorithm Scenarios*

FLOGI-based load balancing is similar in many ways to ENode-based load balancing. An important difference that affects how the switch places sessions on links is that for



FLOGI-based load balancing, only the FLOGI sessions are counted when the link load is calculated. FDISC sessions are not counted to determine the link load. Because ENode-based load balancing uses the sum of the FLOGI and FDISC sessions to determine the link load, an interface with exactly the same combination of FLOGI and FDISC sessions can have a different session count depending on the algorithm used. A different session count can change the interface to which the switch assigns the next session.

As with ENode-based load balancing, FLOGI-based load balancing ensures that VN\_Port FDISC sessions are placed on the same link as their parent ENode FLOGI sessions, regardless of the link load. FLOGI-based load balancing can result in a less-balanced load among the NP\_Port links, but it provides the control and predictability of keeping ENodes and their VN\_Port sessions on the same link.

The examples in this section use the topology shown in [Figure 167 on page 4442](#).

- QFX Series configured as an FCoE-FC gateway
- Two gateway NP\_Ports, **fc-0/0/0** and **fc-0/0/1**, connected to an FC SAN fabric switch at a speed of 8 Gbps
- Three ENodes connected to the gateway:
  - ENode\_A, which has 2 VN\_Port FDISC sessions
  - ENode\_B, which has 20 VN\_Port FDISC sessions
  - ENode\_C, which has 100 VN\_Port FDISC sessions
- NP\_Ports **fc-0/0/0** and **fc-0/0/1**, and ENode\_A, ENode\_B, and ENode\_C, belong to the same local FC fabric on the gateway

When the NP\_Ports initialize, they send FLOGI messages to the FC switch and log in to the FC SAN fabric. The gateway then advertises the fabric to the ENodes on the Ethernet side of the network. At this point, the load on both of the NP\_Ports is equal. Now the ENodes and VN\_Ports start to log in to the fabric.

Because FLOGI-based load balancing does not count FDISC sessions when calculating the link load, how the sessions are placed on the link depends only on the number of FLOGI sessions per interface, not on the number of FLOGI sessions plus FDISC sessions. This means that an ENode with a FLOGI session and many FDISC sessions is counted as having the same load as an ENode with a FLOGI session and no FDISC sessions.

#### Scenario 1:

1. ENode\_A sends a FLOGI to log in to the fabric. Because the loads on the two NP\_Ports are equal, the session for ENode\_A is randomly placed on one of the links. In this example, the ENode\_A FLOGI session is placed on port **fc-0/0/0**.
2. ENode\_B logs in. Because the load is less on port **fc-0/0/1**, the ENode\_B FLOGI session is placed on port **fc-0/0/1**.
3. The two VN\_Ports on ENode\_A log in to the fabric. Their sessions are placed on port **fc-0/0/0**, following ENode\_A on the link. However, unlike simple load balancing or ENode-based load balancing, the session count of the two ports is still equal (one session each) because the FDISC sessions are not used in the session count.



4. The 20 VN\_Ports on ENode\_B log in to the fabric. Their sessions are placed on port **fc-0/0/1**, following ENode\_B on the link. Again, unlike simple load balancing or ENode-based load balancing, the session count of the two ports is still equal (one session each) because the FDISC sessions are not used in the session count.
5. ENode\_C logs in. Because the link loads are counted as equal, the ENode\_C login session is randomly placed on one of the links. In this example, the ENode\_C login session is placed on port **fc-0/0/0**.
6. The 100 VN\_Ports on ENode\_C log in to the fabric. Their sessions follow the ENode\_C session onto port **fc-0/0/0**.
7. If more VN\_Ports come up, their FDISC sessions are placed on the same link as the corresponding parent ENode session.

If a fourth ENode, ENode\_D, sends a FLOGI to log in to the fabric, it is placed on port **fc-0/0/1** because port **fc-0/0/0** has a session count of two (two FLOGIs from ENode\_A and ENode\_C, FDISCs not counted) and port **fc-0/0/1** has a session count of one (one FLOGI from ENode\_B, FDISCs not counted), so port **fc-0/0/1** is the least-loaded port.

With FLOGI-based load balancing, it is possible for ENodes with many FDISC sessions to be placed on the same link, whereas ENodes with few FDISC sessions are placed on different links because only FLOGIs are used in the session count.

### Load Balancing on the FCoE Interfaces (Ethernet Links)

You can achieve load balancing on the 10-Gigabit Ethernet interfaces that belong to an FCoE VLAN by configuring them in one or more link aggregation groups (LAGs). In addition to load balancing, LAGs offer the advantages of protecting against port failover, increasing available link bandwidth, and preventing spanning-tree algorithms from blocking physical links and wasting bandwidth.

#### **Related Documentation**

- [Understanding an FCoE-FC Gateway on page 4399](#)
- [Understanding FCoE-FC Gateway Functions on page 4403](#)
- [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)
- [Defining the Proxy Load-Balancing Algorithm on page 4586](#)
- [Simulating On-Demand Fibre Channel Link Load Rebalancing \(Dry Run Test\) on page 4588](#)
- [Example: Configuring Automated Fibre Channel Interface Load Rebalancing on page 4572](#)
- [show fibre-channel proxy fabric-state on page 4757](#)
- [request fibre-channel proxy load-rebalance on page 4681](#)
- [Monitoring Fibre Channel Interface Load Balancing on page 4665](#)



## Understanding OxID Hash Control for FCoE Traffic Load Balancing

The originator exchange identifier (OxID) field is one of several fields that the switch can use in its hash function computation for FCoE traffic load balancing over multiple outgoing links in an Ethernet link aggregation group (LAG). The originator of an exchange between a pair of Fibre Channel (FC) endpoints (such as an FCoE host and an FC storage device) uses the OxID field as an identifier for that exchange. The originator also uses the OxID field to track the progress of the series of sequences that comprise the exchange.

When FCoE traffic traverses a LAG, it can take multiple different links between the source and destination endpoints. The idea is to distribute the FCoE traffic across the LAG links, thus balancing the link load. The switch creates a hash value from some of the packet header fields, and uses the hash value to assign each packet to one of the LAG links. The switch always uses five packet header fields to compute the hash value:

- Source ID (SID)
- Destination ID (DID)
- Fabric ID (FID)
- Source Port ID (SPID)
- Source Module ID (SMID)

In addition, the OxID field is included by default in the FCoE load-balancing hash computation. However, if you do not want to use the OxID field in the FCoE load-balancing hash computation, you can remove it from the computation by using the **set forwarding-options hash-key family fcoe oxid disable** command.

Including the OxID field in the load-balancing hash computation allows different exchanges between a pair of Fibre Channel (FC) endpoints (such as an FCoE host and an FC storage device) to take different paths across the network, thus improving the aggregate network throughput.

However, if the paths between different sets of FC endpoints have common links, congestion on one set of FC endpoints can affect the other set of endpoints. Such congestion can happen if the FCoE traffic on the two sets of endpoints uses the same priority (IEEE 802.1p code point). It is common for networks to use priority 3 (IEEE 802.1p code point 011) for FCoE traffic. However, on the QFX3500 switch, you can assign different IEEE priorities to different lossless FCoE flows as described in [“Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows” on page 4896](#) to further separate the traffic flows.

### Related Documentation

- [Enabling and Disabling CoS OxID Hash Control on page 4589](#)



## Understanding VN\_Port to VF\_Port FIP Snooping on an FCoE Transit Switch

Fibre Channel over Ethernet (FCoE) Initialization Protocol (FIP) snooping is a security mechanism that is designed to prevent unauthorized access and data transmission to a Fibre Channel (FC) network. It works by filtering traffic to permit only servers that have logged in to an FC network to access that network.

You explicitly enable VN\_Port to VF\_Port (VN2VF\_Port) FIP snooping (FC-BB-5) on FCoE VLANs when the QFX Series is an FCoE transit switch connecting FCoE devices on the Ethernet network to FC switches or gateways at the FC storage area network (SAN) edge. The transit switch applies FIP snooping filters at the ports associated with the FCoE VLANs on which you enable VN2VF\_Port FIP snooping. An FCoE transit switch is a data center bridging (DCB) switch with FIP snooping capability.

Through the FIP process, FCoE devices that have a converged network adapter (CNA) present an FCoE Node (ENode) that can log in to the FC network. The login process establishes a dedicated virtual link between a virtual N\_Port (VN\_Port) on the ENode and a virtual F\_Port (VF\_Port) on the FC switch to emulate a point-to-point connection. The emulated connection is called a virtual link.

Virtual links pass transparently through the switch. The ENode VN\_Port and the FC switch VF\_Port do not detect the transit switch, and virtual links appear to be direct point-to-point links.

The QFabric system applies VN2VF\_Port FIP snooping firewall filters at the directly attached edge ports associated with the FCoE VLANs on which you enable VN2VF\_Port FIP snooping. FIP snooping provides security for virtual links by creating firewall filters based on information gathered (snooped) about FC devices during FIP transactions.

The QFX3500 switch also supports VN\_Port to VN\_Port (VN2VN\_Port) FIP snooping (FC-BB-6) to allow FCoE initiators and targets to communicate directly through the switch without going through an FCoE forwarder (FCF) or an FC switch, as described in [“Understanding VN\\_Port to VN\\_Port FIP Snooping on an FCoE Transit Switch” on page 4454](#).



**NOTE:** An FCoE VLAN can support either VN2VF\_Port FIP snooping (FC-BB-5) or VN2VN\_Port FIP snooping (FC-BB-6), but not both. The same QFX3500 switch can have multiple FCoE VLANs configured, some for VN2VF\_Port FIP snooping traffic and others for VN2VN\_Port FIP snooping traffic. On FCoE VLANs that are configured as VN2VN\_Port snooping VLANs, VN2VF\_Port FIP snooping traffic is dropped.

When you enable VN2VF\_Port FIP snooping, the system snoops VN\_Port to VF\_Port packets and enforces security only on VN2VF\_Port virtual links. When you enable VN2VN\_Port FIP snooping, the system snoops VN\_Port to VN\_Port packets and enforces security only on VN2VN\_Port virtual links.

- 
- [FC Network Security on page 4449](#)
  - [VN2VF\\_Port FIP Snooping Functions on page 4449](#)




- [FIP Snooping Firewall Filters on page 4450](#)
- [Session Scalability on page 4450](#)
- [VN2VF\\_Port FIP Snooping Implementation on page 4450](#)
- [T11 VN2VF\\_Port FIP Snooping Specification on page 4453](#)

## FC Network Security

In traditional FC networks, the FC switch is usually a trusted entity, and server ENodes connect directly to its VF\_Ports. After an ENode gains access to the network through the fabric login (FLOGI) process, the FC switch enforces zoning configurations, ensures that the ENode uses valid addresses, monitors the connection, and performs other security functions to prevent unauthorized access.

However, FCoE exposes FC frames to Ethernet networks, which do not have the same level of security as native FC networks. VN2VF\_Port FIP snooping firewall filters emulate the native FC network security functions by preventing unauthorized access to the FC switch through the transit switch and by ensuring the security of the virtual link between each ENode and the FC switch, as shown in [Figure 168 on page 4449](#). VN2VF\_Port FIP snooping also prevents man-in-the-middle attacks.

**Figure 168: FCoE Transit Switch Performs VN2VF\_Port FIP Snooping**

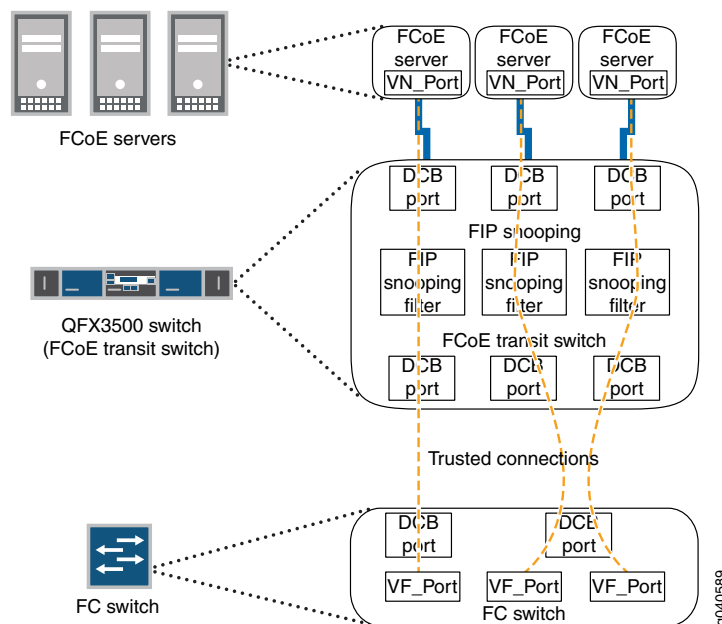

The transit switch performs VN2VF\_Port FIP snooping at the ports connected to the FCoE devices. At the SAN edge, the FC switch must be able to convert the FCoE traffic to native FC traffic.

## VN2VF\_Port FIP Snooping Functions

When VN2VF\_Port FIP snooping is enabled, the QFX3500 transit switch sets and applies filters to block all FCoE traffic by default. The transit switch monitors FIP logins, solicitations, and advertisements that pass through it and gathers information about the



ENode address and the address of the port on the FC switch. The transit switch uses the information to construct firewall filters that permit access only to logged-in ENodes. All other traffic on the VLAN is denied.

For example, when an ENode on an FCoE VLAN performs a successful login to an FC switch port, the transit switch snoops the FIP information and constructs a firewall filter that provides access for the ENode to that port on the FC switch.

The firewall filters enable FCoE frames to pass through the transit switch only on a virtual link established between an FCoE device ENode VN\_Port and the FC switch VF\_Port to which it has logged in. The firewall filters ensure that ENodes can only connect to the FC switches they have successfully logged in to and that only valid FCoE traffic along valid paths is transmitted. VN2VF\_Port FIP snooping maintains the filters by tracking FCoE sessions (ENode to FCF sessions).

---

### FIP Snooping Firewall Filters

The effect of the firewall filters is to protect the FCoE ports. VN2VF\_Port FIP snooping performs the following actions and checks to ensure that FCoE traffic is valid:

- Denies ENodes that use the FC switch media access control (MAC) address as the source address.
- Enables ENodes to transmit FIP and FCoE frames to the FC switch address.
- Ensures that the FCoE source address the FC switch assigns or accepts is only used for FCoE traffic.
- Ensures that FCoE frames are only addressed to the accepting FC switch.

---

### Session Scalability

The system supports up to 2500 total FIP snooping sessions on an interface, a gateway FC fabric, a QFX3500 switch, a QFabric Node device, or a QFabric Node group. For example, you can:

- Place all 2500 sessions on one gateway FC fabric interface.
- Split the 2500 sessions among the interfaces on one gateway FC fabric.
- Split the 2500 sessions among the interfaces on multiple gateway FC fabrics on a switch.
- Split the 2500 sessions among the interfaces on multiple gateway FC fabrics on multiple Node devices in a QFabric Node group.

Regardless of how you allocate the sessions among interfaces and local FC fabrics on a QFX3500 switch or on a QFabric system Node device or Node group, the combined FIP session limit is a maximum of 2500 sessions.

---

### VN2VF\_Port FIP Snooping Implementation

You enable VN2VF\_Port FIP snooping on a per-VLAN basis on VLANs that carry FCoE traffic. The switch snoops FIP frames at the ports associated with FCoE VLANs enabled



for VN2VF\_Port FIP snooping. The switch then installs the resulting firewall filters on the ports to ensure that all VN2VF\_Port FIP snooping occurs on the switch network edge.

VN2VF\_Port FIP snooping FCoE VLANs must meet the following criteria:

- An FCoE VLAN should be dedicated to FCoE traffic only.
- An FCoE VLAN cannot support both VN2VF\_Port FIP snooping and VN2VN\_Port FIP snooping simultaneously. You must configure separate FCoE VLANs for VN2VF\_Port FIP snooping traffic and for VN2VN\_Port FIP snooping traffic.



**NOTE:** Changing an FCoE VLAN from VN2VF\_Port FIP snooping mode to VN2VN\_Port snooping mode terminates the existing virtual links on the VLAN. The transit switch removes the existing FIP snooping filters, creates the new FIP snooping filters, and applies them to the FIP snooping ports. If you downgrade the software to Junos OS Release 12.1 or earlier, VLANs configured for VN2VN\_Port FIP snooping revert to VN2VF\_Port FIP snooping VLANs.

- All access ports associated with an FCoE VLAN (ports connected to a converged network adapter [CNA] in an FCoE device) should be configured in **tagged-access** port mode. Access ports associated with an FCoE VLAN should not be configured as access ports or trunk ports.
- All ports connected to an FC switch (or FCoE forwarder) must be configured in **trunk** port mode. Ports connected to an FC switch must be configured as trusted ports.
- FIP traffic uses the native VLAN (FIP VLAN discovery and notification frames are exchanged as untagged packets).
- All FCoE VLAN traffic must be tagged and cannot belong to the native VLAN.
- FCoE VLAN traffic cannot be untagged or priority-tagged.

When you enable VN2VF\_Port FIP snooping, the switch inspects FIP frames.

The VN2VF\_Port FIP snooping implementation includes these considerations:

- [ENode-Facing Interfaces on page 4451](#)
- [Network-Facing Interfaces on page 4452](#)
- [FC-MAP on page 4452](#)

### ***ENode-Facing Interfaces***

We recommend that you enable VN2VF\_Port FIP snooping on all FCoE VLANs that connect VN\_Ports to VF\_Ports to ensure secure connections between server ENodes and FC switches (or enable VN2VN\_Port FIP snooping on FCoE VLANs that connect VN\_Ports to other VN\_Ports). The interfaces that belong to FCoE VLANs (interfaces that connect to CNAs in FCoE devices) should be configured in **tagged-access** port mode. After VN2VF\_Port FIP snooping is enabled on an FCoE VLAN, the transit switch denies FCoE traffic from any ENode on that VLAN until the ENode performs a valid fabric login with an FC switch.



The **tagged-access** port mode was not available in Junos OS Release 11.3 and prior releases. In Release 11.3 and earlier, **trunk** port mode was used for Ethernet interfaces that connected to FCoE access devices. Because **tagged-access** mode is now available, using **trunk** mode for interfaces connected to FCoE CNAs is not recommended.

If an existing configuration uses **trunk** mode for ports connected to FCoE CNAs, you can change the port mode to **tagged-access** without disrupting traffic. Although we recommend changing the port mode of these ports from **trunk** to **tagged-access** as a best practice, it is not mandatory. New configurations should use **tagged-access** mode for interfaces that connect to FCoE devices.



**NOTE:** Do not configure ENode-facing interfaces as FCoE trusted interfaces when VN2VF\_Port FIP snooping is enabled on those interfaces. If you enable VN2VF\_Port FIP snooping on an FCoE VLAN and you configure ENode-facing interfaces that are members of the FIP snooping VLAN as **fcoe-trusted**, then FCoE devices might not be able to log in to the FC network.



**NOTE:** Changing ports from untrusted to trusted removes any existing VN2VF\_Port FIP snooping filters from the ports and terminates the existing sessions. Changing the fabric ports from trusted to untrusted forces all of the FCoE sessions on those ports to log out so that when the ENodes and VN\_Ports log in again, the switch can build the appropriate VN2VF\_Port FIP snooping filters.

---

### **Network-Facing Interfaces**

When the switch acts as an FCoE transit switch, you must configure any interface that is connected to a switch as an FCoE trusted interface in **trunk** port mode and as a 10-Gigabit Ethernet interface.

Switch-facing Ethernet interfaces have the following requirements and behaviors:

- You must explicitly configure switch-facing trunk ports on an FCoE transit switch as FCoE trusted interfaces.
- After you configure an FC switch-facing trunk port as a trusted interface, the FCoE transit switch always processes FC switch frames because they come from a source on a trusted interface.
- All ports in an FCoE VLAN must be configured as tagged access or trunk ports.

### **FC-MAP**

When the switch acts as an FCoE transit switch and you enable VN2VF\_Port FIP snooping on an FCoE VLAN, you can optionally specify a 24-bit FCoE mapped address prefix (FC-MAP) value. On a given VLAN, the transit switch learns only those FC switches that have a matching FC-MAP value. If the transit switch FCoE VLAN FC-MAP value does not match the FC switch FC-MAP value, the transit switch does not discover the FC switch



on that VLAN, and the ENodes on that VLAN cannot access the FC switch. An FCoE VLAN can have one and only one FC-MAP value.

The FC-MAP value is a MAC address prefix unique to an FC switch in the FC SAN fabric that the FC switch uses to identify FCoE traffic for a given FC fabric (traffic on a particular FCoE VLAN). The FC switch combines the FC-MAP value with a unique 24-bit FCID value for the ENode VN\_Port during the login process. This creates a 48-bit identifier that is unique to the fabric. The FC switch assigns this 48-bit value to the ENode VN\_Port as its MAC address and unique identifier for the session. Each VN\_Port session the ENode establishes with the FC switch receives a unique FCID from the FC switch, so an FCoE device can host multiple virtual links (one for each VN\_Port) to an FC switch, each with a 48-bit MAC address that is unique to the fabric.

The VN2VF\_Port FIP snooping filter compares the configured FC-MAP value with the FC-MAP value in the header of frames coming from the ENode VN\_Port. If the values do not match, the transit switch denies access.



**NOTE:** Changing the FC-MAP value causes all logins to be dropped and forces ENodes to log in again.



**NOTE:** Do not configure static MAC addresses with the FC-MAP value as a prefix (the first 24 bits of the MAC address). If you configure a static MAC address that uses the FC-MAP value as a prefix, the system deletes the static MAC address automatically after you enable FIP snooping. The static MAC address configuration is not restored even if you disable FIP snooping later. (The system considers a static MAC address with the FC-MAP value as the prefix to be a misconfiguration.) Do not use a MAC address with the FC-MAP value as the prefix for any traffic other than the FIP snooping traffic when the QFX Series is acting as a transit switch.

### T11 VN2VF\_Port FIP Snooping Specification

For more details about VN2VF\_Port FIP snooping, see <http://www.t11.org/ftp/t11/pub/fc/bb-5/08-264v3.pdf> for the Technical Committee T11 organization document *Increasing FCoE Robustness using FIP Snooping*.

#### Related Documentation

- [Overview of Fibre Channel on the QFX Series on page 4380](#)
- [Understanding DCB Features and Requirements on page 4389](#)
- [Understanding FCoE Transit Switch Functionality on page 4396](#)
- [Understanding an FCoE-FC Gateway on page 4399](#)
- [Overview of FIP on page 4384](#)
- [Understanding VN\\_Port to VN\\_Port FIP Snooping on an FCoE Transit Switch on page 4454](#)
- [Configuring VN2VF\\_Port FIP Snooping on an FCoE Transit Switch on page 4596](#)



- [Disabling VN2VF\\_Port FIP Snooping on an FCoE-FC Gateway Switch Interface on page 4598](#)
- [Understanding Fibre Channel Terminology on page 4483](#)

## Understanding VN\_Port to VN\_Port FIP Snooping on an FCoE Transit Switch

VN\_Port to VN\_Port (VN2VN\_Port) FIP snooping (FC-BB-6) on an FCoE transit switch is conceptually similar to VN\_Port to VF\_Port (VN2VF\_Port) FIP snooping (FC-BB-5) on an FCoE transit switch. VN2VN\_Port FIP snooping provides security in the form of filters. The filters help prevent unauthorized access and data transmission on a bridge that connects ENodes in the Ethernet network.

You enable VN2VN\_Port FIP snooping on the FCoE VLAN that transports the VN2VN traffic. The transit switch applies VN2VN\_Port FIP snooping filters at the ports associated with the FCoE VLANs on which you enable VN2VN FIP snooping.

A key benefit of VN2VN\_Port FIP snooping is that it enables FCoE initiators and targets to communicate directly through the switch without going through an FCoE forwarder (FCF) or an FC switch. The transit switch does not differentiate between initiators and targets because the transit switch sees both VN\_Ports as FIP virtual link end points. Direct VN2VN\_Port communication requires secure access (FIP snooping filters) because ENodes are not trusted entities.

This topic describes:

- [VN2VN\\_Port FIP Snooping and FIP Snooping Virtual Links on page 4454](#)
- [VN2VN\\_Port Communication Modes on page 4455](#)
- [Network Security on page 4455](#)
- [VN2VN\\_Port FIP Snooping Functions on page 4456](#)
- [Scalability on page 4456](#)
- [VN2VN\\_Port FIP Snooping Implementation on page 4456](#)
- [ENode-Facing Interfaces on page 4457](#)
- [Network-Facing Interfaces \(Connecting to Another Transit Switch\) on page 4458](#)
- [Beacon Period \(VN2VN\\_Port FIP Snooping Link Maintenance\) on page 4458](#)

---

### VN2VN\_Port FIP Snooping and FIP Snooping Virtual Links

FIP snooping under the T11 FC-BB-5 specification requires that an FC switch or an FCF must be in the path between two VN\_Ports when they communicate. Introduced in the T11 FC-BB-6 specification (see <http://www.t11.org/ftp/t11/pub/fc/bb-6/10-019v3.pdf>), VN2VN\_Port FIP snooping allows the FCoE transit switch to connect two VN\_Ports to each other directly, without going through an FC switch or an FCF, provided that the ENodes have logged in to the FC network.

In VN2VF\_Port FIP snooping, when an ENode logs in to the FC network, the FCoE transit switch snoops the FIP communication between the ENode and the FC switch. In VN2VN\_Port FIP snooping mode, the transit switch creates filters on the switch access



ports to control VN\_Port access to other VN\_Ports on the Ethernet network. This allows the switch to establish a dedicated virtual link that emulates a point-to-point connection between two VN\_Ports, through the switch.

Virtual links pass transparently through the transit switch. The VN\_Ports do not detect the transit switch, and virtual links appear to be direct point-to-point links.

You explicitly enable VN2VN\_Port FIP snooping on FCoE VLANs when the QFX3500 switch is an FCoE transit switch connecting FCoE devices on the Ethernet network to each other and to FC switches or gateways at the FC storage area network (SAN) edge. An FCoE transit switch is a data center bridging (DCB) switch with FIP snooping capability.



**NOTE:** An FCoE VLAN can support either VN2VF\_Port FIP snooping or VN2VN\_Port FIP snooping, but not both. Configure separate FCoE VLANs for VN2VF\_Port FIP snooping traffic and for VN2VN\_Port FIP snooping traffic. On FCoE VLANs that are configured as VN2VN\_Port FIP snooping VLANs, VN\_Port to VF\_Port traffic is dropped.

When you enable FIP snooping, the system snoops VN2VF\_Port packets and enforces security only on VN\_Port to VF\_Port virtual links. When you enable VN2VN\_Port FIP snooping, the system snoops VN\_Port to VN\_Port FIP packets and enforces security only on VN\_Port to VN\_Port virtual links.

The transit switch applies VN2VN\_Port FIP snooping filters at the ports associated with the FCoE VLANs on which you enable VN2VN\_Port FIP snooping. VN2VN\_Port FIP snooping provides security for virtual links by creating filters based on information gathered (snooped) about FCoE devices during FIP transactions.

### VN2VN\_Port Communication Modes

The transit switch supports two VN2VN\_Port communication modes:

- Point-to-point mode
- Multipoint mode

In point-to-point mode, two ENodes are connected to the network and form a single VN\_Port to VN\_Port virtual link. This is analogous to the point-to-point FC link between an FC initiator and an FC target.

In multipoint mode, multiple ENodes are connected to the network and form multiple virtual links. Each virtual link is created between one pair of VN\_Ports. This is analogous to loop mode in traditional FC networks.

The VN2VN\_Port communication mode is not configured; it is determined by the number of ENodes connected to the network.

### Network Security

In traditional FC networks, the FC switch is usually a trusted entity and the server ENodes are untrusted entities. The ENodes connect directly to the FC switch VF\_Ports. After an



ENode gains access to the network through the fabric login (FLOGI) process, the FC switch enforces zoning configurations, ensures that the ENode uses valid addresses, monitors the connection, and performs other security functions to prevent unauthorized access.

However, FCoE exposes FC frames to Ethernet networks, which do not have the same level of security as native FC networks. VN2VN\_Port FIP snooping filters emulate the native FC network security functions by preventing unauthorized access and by ensuring the security of the virtual link between ENode VN\_Ports. The transit switch performs VN2VN\_Port FIP snooping at the ports connected to the FCoE VN\_Port devices.

---

### VN2VN\_Port FIP Snooping Functions

When you enable VN2VN\_Port FIP snooping, the QFX3500 transit switch sets and applies filters to block all FCoE traffic on the VLAN by default. The transit switch monitors FIP logins, solicitations, and advertisements that pass through it and gathers information about the ENode address. The transit switch uses the information to construct filters that permit access only to logged-in ENodes. All other traffic on the VLAN is denied.

The filters enable FCoE frames to pass through the transit switch only on a virtual link established between two VN\_Ports. The filters ensure that ENodes can only connect to other ENodes if they have successfully logged in to each other, and that only valid FCoE traffic along valid paths is transmitted. VN2VN\_Port FIP snooping maintains the filters by tracking VN\_Port to VN\_Port sessions.

---

### Scalability

Because ENodes are untrusted and the system needs to apply filters to untrusted FIP snooping interfaces, the total number of combined VN2VN\_Port FIP snooping sessions per switch is 376 sessions (ENode to ENode sessions) on untrusted interfaces. On interfaces that are configured as trusted interfaces, no FIP snooping filters are applied.



**NOTE:** The total number of sessions the system can support is the combined number of VN2VF\_Port sessions and VN2VN\_Port sessions. If VN2VF\_Port sessions are active, the total number of available VN2VN\_Port sessions is reduced.

---

---

### VN2VN\_Port FIP Snooping Implementation

You enable VN2VN\_Port FIP snooping on a per-VLAN basis on VLANs that carry FCoE traffic. The switch snoops FIP frames at the ports associated with FCoE VLANs enabled for VN2VN\_Port FIP snooping. The switch then installs the resulting filters on the ENode-facing ports to ensure that all FIP snooping occurs on the switch network edge.

VN2VN\_Port FIP snooping FCoE VLANs must meet the following criteria:

- An FCoE VLAN should be dedicated to FCoE traffic only.
- An FCoE VLAN cannot support both VN2VF\_Port FIP snooping (FC-BB-5) and VN2VN\_Port FIP snooping (FC-BB-6) simultaneously. You must configure separate FCoE VLANs for FIP snooping traffic and for VN2VN\_Port FIP snooping traffic.





**NOTE:** Changing an FCoE VLAN from VN2VF\_Port FIP snooping mode to VN2VN\_Port FIP snooping mode terminates the existing virtual links on the VLAN. The transit switch removes the existing FIP snooping filters, creates the new FIP snooping filters, and applies them to the FIP snooping ports. If you downgrade the software to Junos OS Release 12.1 or earlier, VLANs configured for VN2VN\_Port FIP snooping revert to VN2VF\_Port FIP snooping VLANs.

- As a best practice, all access ports associated with an FCoE VLAN (ports connected to a converged network adapter [CNA] in an FCoE device) should be configured in **tagged-access** port mode, but access and trunk port modes are also supported.
- Access ports should be configured as untrusted ports.
- All ports connected to another transit switch must be configured in **trunk** port mode.
- FIP traffic uses the native VLAN.
- You can enable VN2VN\_Port FIP snooping on a native VLAN.

### ENode-Facing Interfaces

We recommend that you either enable VN2VN\_Port FIP snooping on all FCoE VLANs to ensure secure connections between VN\_Ports, or enable VN2VF\_Port FIP snooping on FCoE VLANs that connect ENodes to an FC switch. The interfaces that belong to FCoE VLANs (interfaces that connect to CNAs in FCoE devices) should be configured in **tagged-access** port mode, unless your CNA does not support tagged VN2VN traffic. After you enable VN2VN\_Port FIP snooping on an FCoE VLAN, the transit switch denies FCoE traffic from any ENode on that VLAN until the ENode performs a valid fabric login (FIP FLOGI) with another ENode.

The **tagged-access** port mode was not available in Junos OS Release 11.3 and prior releases. In Release 11.3 and earlier, **trunk** port mode was used for Ethernet interfaces that connected to FCoE access devices. Because **tagged-access** mode is now available, using **trunk** mode for interfaces connected to FCoE CNAs is not recommended.

If an existing configuration uses **trunk** mode for ports connected to FCoE CNAs, you can change the port mode to **tagged-access** without disrupting traffic. Although we recommend changing the port mode of these ports from **trunk** to **tagged-access** as a best practice, it is not mandatory. New configurations should use **tagged-access** mode for interfaces that connect to FCoE devices.



**NOTE:** Do not configure ENode-facing interfaces as FCoE trusted interfaces when VN2VN\_Port FIP snooping is enabled on those interfaces. If you enable VN2VN\_Port FIP snooping on an FCoE VLAN and you configure ENode-facing interfaces that are members of the VN2VN\_Port FIP snooping VLAN as FCoE trusted, then FCoE devices might not be able to log in to each other.





**NOTE:** Changing ports from untrusted to trusted removes any existing VN2VN\_Port FIP snooping filters from the ports and terminates the existing sessions. Changing the ports from trusted to untrusted forces all of the FCoE sessions on those ports to log out so that when the ENodes and VN\_Ports log in again, the switch can build the appropriate VN2VN\_Port FIP snooping filters.

---

### Network-Facing Interfaces (Connecting to Another Transit Switch)

---

Configure any interface that is connected to another transit switch (not to an ENode) as an FCoE trusted interface, in **trunk** port mode, and as a 10-Gigabit Ethernet interface.

Network-facing Ethernet interfaces have the following requirements and behaviors:

- You must explicitly configure network-facing trunk ports on an FCoE transit switch as FCoE trusted interfaces.
- After you configure a network-facing trunk port as a trusted interface, the FCoE transit switch always processes frames from the connected switch because they come from a source on a trusted interface.
- As a best practice, configure ports in an FCoE VLAN as tagged access ports, but access and trunk port modes are also supported to accommodate whatever types of VN2VN traffic your CNA supports.

---

### Beacon Period (VN2VN\_Port FIP Snooping Link Maintenance)

---

The transit switch needs to maintain the virtual links between VN\_Ports, and needs to know when sessions begin and end, and when to install and remove the FIP snooping filters. FIP snooping uses a FIP keepalive advertisement to accomplish this task. VN2VN\_Port FIP snooping does not exchange FIP keepalive timer information. Instead, you configure a *beacon period*, which performs the same function as a keepalive timer.

The beacon period is the time interval between messages which verify that the connection is still valid and that the device at the other end of the virtual link is still reachable. You set the beacon period value for each FCoE VLAN that you configure to do VN2VN\_Port FIP snooping.



**NOTE:** Explicitly set the beacon period when you configure VN2VN\_Port FIP snooping. VN\_Ports do not automatically send beacons.

ENodes transmit periodic multicast N\_Port\_ID beacons to the ALL-VN2VN-ENode-MACs address. The transmission period varies by a random delay of between 0 ms and 100 ms to avoid synchronized bursts of multicast traffic on the network.

If the transit switch does not receive a beacon message from an ENode within 2.5 times the configured beacon period, the transit switch considers the virtual link to be down and terminates the virtual link to that ENode.



- Related Documentation**
- [Understanding DCB Features and Requirements on page 4389](#)
  - [Understanding FCoE Transit Switch Functionality on page 4396](#)
  - [Understanding VN\\_Port to VF\\_Port FIP Snooping on an FCoE Transit Switch on page 4448](#)
  - [Overview of FIP on page 4384](#)
  - [Understanding Fibre Channel Terminology on page 4483](#)
  - [Example: Configuring VN2VN\\_Port FIP Snooping \(FCoE Hosts Directly Connected to the Same FCoE Transit Switch\) on page 4551](#)
  - [Example: Configuring VN2VN\\_Port FIP Snooping \(FCoE Hosts Directly Connected to Different FCoE Transit Switches\) on page 4555](#)
  - [Example: Configuring VN2VN\\_Port FIP Snooping \(FCoE Hosts Indirectly Connected Through an Aggregation Layer FCoE Transit Switch\) on page 4563](#)
  - [Enabling VN2VN\\_Port FIP Snooping and Configuring the Beacon Period on an FCoE Transit Switch on page 4599](#)

## Understanding MC-LAGs on an FCoE Transit Switch

Multichassis link aggregation groups (MC-LAGs) provide redundancy and load balancing between two QFX3500 switches, multihoming support for client devices such as servers, and a loop-free Layer 2 network without running Spanning Tree protocol (STP).

You can use an MC-LAG to provide a redundant aggregation layer for Fibre Channel over Ethernet (FCoE) traffic. To support lossless transport of FCoE traffic across an MC-LAG, you must configure the appropriate class of service (CoS) on both of the QFX3500 switches with MC-LAG port members. The CoS configuration must be the same on both of the MC-LAG switches because MC-LAGs do not carry forwarding class and IEEE 802.1p priority information.

Ports that are part of an FCoE-FC gateway configuration (a virtual FCoE-FC gateway fabric) do not support MC-LAGs. Ports that are members of an MC-LAG act as passthrough transit switch ports.

QFX3500 Node devices support MC-LAGs. QFabric Node devices do not support MC-LAGs.

This topic describes:


- [Supported Topology on page 4459](#)
- [FIP Snooping and FCoE Trusted Ports on page 4461](#)
- [CoS and Data Center Bridging \(DCB\) on page 4462](#)

### Supported Topology

QFX3500 switches that are not directly connected to FCoE hosts and that act as passthrough transit switches support MC-LAGs for FCoE traffic in an *inverted-U* network topology, as shown in [Figure 169 on page 4460](#):



Figure 169: Supported Topology for an MC-LAG on an FCoE Transit Switch

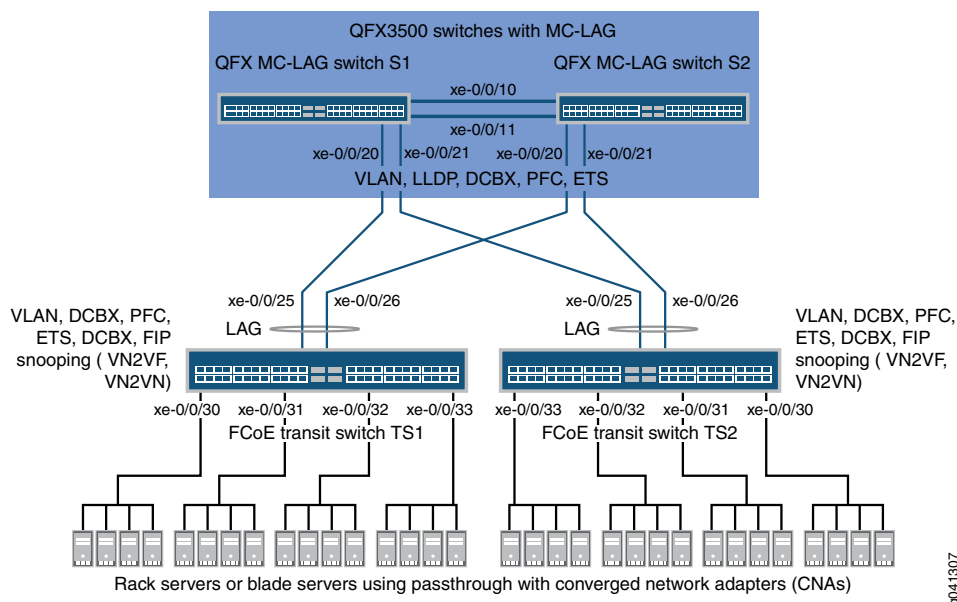

The following rules and guidelines apply to MC-LAGs when used for FCoE traffic. The rules and guidelines help ensure the proper handling and lossless transport characteristics required for FCoE traffic:

- The two QFX3500 switches that form the MC-LAG (Switches S1 and S2) cannot use ports that are part of an FCoE-FC gateway fabric. The MC-LAG switch ports must be passthrough transit switch ports (used as part of an intermediate transit switch that is not directly connected to FCoE hosts).
- MC-LAG Switches S1 and S2 cannot be not directly connected to the FCoE hosts.
- The two QFX3500 switches that serve as access devices for FCoE hosts (FCoE Transit Switches TS1 and TS2) use standard LAGs to connect to MC-LAG Switches S1 and S2. FCoE Transit Switches TS1 and TS2 can be standalone QFX3500 switches or they can be Node devices in a QFabric.
- Transit Switches TS1 and TS2 must use transit switch ports for the FCoE hosts and for the standard LAGs to MC-LAG Switches S1 and S2.
- Enable FIP snooping on the FCoE VLAN on Transit Switches TS1 and TS2. You can configure either VN\_Port to VF\_Port (VN2VF\_Port) FIP snooping or VN\_Port to VN\_Port (VN2VN\_Port) FIP snooping, depending on whether the FCoE hosts need to access targets in the FC SAN (VN2VF\_Port FIP snooping) or targets in the Ethernet network (VN2VN\_Port FIP snooping).

FIP snooping should be performed at the access edge and is not supported on MC-LAG switches. Do not enable FIP snooping on MC-LAG Switches S1 and S2. (Do not enable FIP snooping on the MC-LAG ports that connect Switches S1 and S2 to Switches TS1 and TS2 or on the LAG ports that connect Switch S1 to S2.)

- The class of service (CoS) configuration must be consistent on the MC-LAG switches. Because the MC-LAG carries no forwarding class or priority information, each MC-LAG



switch needs to have the same CoS configuration to support lossless transport. (On each MC-LAG switch, the name, egress queue, and CoS provisioning of each forwarding class must be the same, and the PFC configuration must be the same.)

### ***Transit Switches (Server Access)***

The role of FCoE Transit Switches TS1 and TS2 is to connect FCoE hosts in a multi-homed fashion to the MC-LAG switches. In essence, Transit Switches TS1 and TS2 act as access switches for the FCoE hosts. (FCoE hosts are directly connected to Transit switches TS1 and TS2.)

The transit switch configuration depends on whether you want to do VN2VF\_Port FIP snooping or VN2VN\_Port FIP snooping, and whether the QFX3500 transit switches also have ports configured as part of an FCoE-FC gateway virtual fabric. Ports that the QFX3500 switch uses in an FCoE-FC gateway virtual fabric cannot be included in the transit switch LAG connection to the MC-LAG switches. (Ports cannot belong to both a transit switch and an FCoE-FC gateway; you must use different ports for each mode of operation.)

### ***MC-LAG Switches (FCoE Aggregation)***

The role of MC-LAG Switches S1 and S2 is to provide redundant, load-balanced connections between FCoE transit switches. In essence, MC-LAG Switches S1 and S2 act as aggregation switches. FCoE hosts are not directly connected to the MC-LAG switches.

The MC-LAG switch configuration is the same regardless of which type of FIP snooping that FCoE Transit Switches TS1 and TS2 perform.

### **FIP Snooping and FCoE Trusted Ports**

To maintain secure access, enable VN2VF\_Port FIP snooping or VN2VN\_Port FIP snooping at the transit switch access ports connected directly to the FCoE hosts. FIP snooping should be performed at the access edge of the network to prevent unauthorized access. For example, in [Figure 169 on page 4460](#), you enable FIP snooping on the FCoE VLANs on Transit Switches TS1 and TS2 that include the access ports connected to the FCoE hosts.

Do not enable FIP snooping on the switches used to create the MC-LAG. For example, in [Figure 169 on page 4460](#), you would not enable FIP snooping on the FCoE VLANs on Switches S1 and S2.

Configure links between switches as FCoE trusted ports to reduce FIP snooping overhead and ensure that the system performs FIP snooping only at the access edge. In the sample topology, configure the Transit Switch TS1 and TS2 LAG ports connected to the MC-LAG switches as FCoE trusted ports, configure the Switch S1 and S2 MC-LAG ports connected to Switches TS1 and TS2 as FCoE trusted ports, and configure the ports in the LAG that connects Switches S1 to S2 as FCoE trusted ports.



## CoS and Data Center Bridging (DCB)

---

The MC-LAG links do not carry forwarding class or priority information. The following CoS properties must have the same configuration on each MC-LAG switch or on each MC-LAG interface to support lossless transport:

- FCoE forwarding class name—For example, the forwarding class for FCoE traffic could use the default **fcoe** forwarding class on both MC-LAG switches.
- FCoE output queue—For example, the **fcoe** forwarding class could be mapped to queue 3 on both MC-LAG switches (queue 3 is the default mapping for the **fcoe** forwarding class).
- Classifier—The forwarding class for FCoE traffic must be mapped to the same IEEE 802.1p code point on each member interface of the MC-LAG on both MC-LAG switches. For example, the FCoE forwarding class **fcoe** could be mapped to IEEE 802.1p code point 011 (code point 011 is the default mapping for the **fcoe** forwarding class).
- Priority-based flow control (PFC)—PFC must be enabled on the FCoE code point on each MC-LAG switch and applied to each MC-LAG interface using a congestion notification profile.

You must also configure enhanced transmission selection (ETS) on the MC-LAG interfaces to provide sufficient scheduling resources (bandwidth, priority) for lossless transport. The ETS configuration can be different on each MC-LAG switch, as long as enough resources are scheduled to support lossless transport for the expected FCoE traffic.

LLDP and DCBX must be enabled on each MC-LAG member interface (LLDP and DCBX are enabled by default on all interfaces).



**NOTE:** As with all other FCoE configurations, FCoE traffic requires a dedicated VLAN that carries only FCoE traffic, and IGMP snooping must be disabled on the FCoE VLAN.

---

### Related Documentation

- [Understanding Multichassis Link Aggregation on page 1931](#)
- [Example: Configuring CoS for FCoE Transit Switch Traffic Across an MC-LAG on page 4517](#)
- [Example: Configuring Multichassis Link Aggregation on page 1958](#)



## Understanding DCBX

Data Center Bridging Capability Exchange protocol (DCBX) is an extension of Link Layer Data Protocol (LLDP). If you disable LLDP on an interface, that interface cannot run DCBX. If you attempt to enable DCBX on an interface on which LLDP is disabled, the configuration commit operation fails. Data center bridging (DCB) devices use DCBX to exchange configuration information with directly connected peers.

This topic describes:

- [DCBX Basics on page 4463](#)
- [DCBX Modes and Support on page 4464](#)
- [DCBX Attribute Types on page 4467](#)
- [DCBX Application Protocol TLV Exchange on page 4468](#)
- [DCBX and PFC on page 4469](#)
- [DCBX and ETS on page 4469](#)

---

### DCBX Basics

DCBX can:

- Discover the DCB capabilities of peers.
- Detect DCB feature misconfiguration or mismatches between peers.
- Configure DCB features on peers.

You can configure DCBX operation for priority-based flow control (PFC), Layer 2 and Layer 4 applications such as FCoE and iSCSI, and ETS. DCBX is enabled or disabled on a per-interface basis.

By default, for PFC and ETS, DCBX automatically negotiates administrative state and configuration with each interface's connected peer. To enable DCBX negotiation for applications, you must configure the applications, map them to IEEE 802.1p code points in an application map, and apply the application map to interfaces.

The FCoE application only needs to be included in an application map when you want an interface to exchange type, length, and values (TLVs) for other applications in addition to FCoE. If FCoE is the only application you want an interface to advertise, then you do not need to use an application map. For ETS, DCBX pushes the switch configuration to peers if they are set to learn the configuration from the switch (unless you disable sending the ETS recommendation TLV on interfaces in IEEE DCBX mode).

You can override the default behavior for PFC, for ETS, or for all applications mapped to an interface by turning off autonegotiation to force an interface to enable or disable that feature. You can also disable DCBX autonegotiation for applications on an interface by excluding those applications from the application map you apply to that interface or by deleting the application map from the interface.

The default autonegotiation behavior for applications that are mapped to an interface is:



- DCBX is enabled on the interface if the connected peer device also supports DCBX.
- DCBX is disabled on the interface if the connected peer device does not support DCBX.

During negotiation of capabilities, the switch can push the PFC configuration to an attached peer if the peer is configured as “willing” to learn the PFC configuration from other peers. The Juniper Networks switch does not support self autoprovisioning and does not change its configuration during autonegotiation to match the peer configuration. (The Juniper switch is not “willing” to learn the PFC configuration from peers.)



**NOTE:** When a port with DCBX enabled begins to exchange type, length, and value (TLV) entries, optional LLDP TLVs on that port are not advertised to neighbors, so that the switch can interoperate with a wider variety of converged network adapters (CNAs) and Layer 2 switches that support DCBX.

---

### DCBX Modes and Support

---

This section describes DCBX support on the QFX Series:

- [DCBX Modes \(Versions\) on page 4464](#)
- [Autonegotiation on page 4466](#)
- [CNA Support for DCBX Modes on page 4467](#)
- [Interface Support for DCBX on page 4467](#)

#### **DCBX Modes (Versions)**

The QFX Series supports the two most common DCBX modes:

- IEEE DCBX—The newest DCBX version. Different TLVs have different subtypes (for example, the subtype for the ETS configuration TLV is 9); the IEEE DCBX Organizationally Unique Identifier (OUI) is 0x0080c2.
- DCBX version 1.01—The Converged Enhanced Ethernet (CEE) version of DCBX. It has a subtype of 2 and an OUI of 0x001b21.

IEEE DCBX and DCBX version 1.01 differ mainly in frame format. DCBX version 1.01 uses one TLV that includes all DCBX attribute information, which is sent as sub-TLVs. IEEE DCBX uses a unique TLV for each DCB attribute.



**NOTE:** The QFX Series does not support pre-CEE (pre-DCB) DCBX versions. Unsupported older versions of DCBX have a subtype of 1 and an OUI of 0x001b21. The QFX Series drops LLDP frames that contain pre-CEE DCBX TLVs.

[Table 308 on page 4465](#) summarizes the differences between IEEE DCBX and DCBX version 1.01, including show command output:



Table 308: Summary of Differences Between IEEE DCBX and DCBX Version 1.01

| Characteristic                                                                   | IEEE DCBX                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | DCBX Version 1.01                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| OUI                                                                              | 0x0080c2                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 0x001b21                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Frame Format                                                                     | Sends a separate, unique TLV for each DCBX attribute. For example, IEEE DCBX uses separate TLVs for ETS, PFC, and each application. Configuration and Recommendation information is sent in different TLVs                                                                                                                                                                                                                                                                       | Sends one TLV that includes all DCBX attribute information organized in sub-TLVs. The “willing” bit determines whether or not an interface can change its configuration to match the connected peer.                                                                                                                                                                                                                                                                                                         |
| Symmetric/asymmetric configuration with peer                                     | Asymmetric or symmetric                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Symmetric only                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Differences in the <b>show dcbx interface interface-name</b> operational command | <ul style="list-style-type: none"> <li>• Synchronization information is not shown because symmetric configuration is not required.</li> <li>• Operational state information is not shown because the operational states do not have to be symmetric.</li> <li>• TLV type is shown because unique TLVs are sent for each DCBX attribute.</li> <li>• ETS peer Configuration TLV and Recommendation TLV information is shown separately because they are different TLVs.</li> </ul> | <ul style="list-style-type: none"> <li>• Synchronization information is shown because symmetric configuration is required.</li> <li>• Operational state information is shown because the operational states do have to be symmetric.</li> <li>• TLV type is not shown because one TLV is used for all attribute information.</li> <li>• Recommendation TLV is not sent (DCBX Version 1.01 uses the “willing” bit to determine whether or not an interface uses the peer interface configuration).</li> </ul> |

For more information about how each DCBX mode exchanges TLVs, see the following specifications:

- For DCBX version 1.01—<http://www.ieee802.org/1/files/public/docs2008/az-wadelaar-dcbx-capability-exchange-discovery-protocol-T108-v101.pdf>
- For IEEE DCBX—<http://www.ieee802.org/1/files/private/az-drafts/d2/802-1az-d2-4.pdf>



**NOTE:** As of Junos OS Release 12.2, this document is located in a private area of the IEEE website, and access requires a password from the IEEE organization. If you are not an IEEE member, you might not be able to access this document until it moves to the public area of the IEEE website.

You can configure interfaces to use the following DCBX modes:

- IEEE DCBX—The interface uses IEEE DCBX regardless of the configuration on the connected peer.



- DCBX version 1.01—The interface uses DCBX version 1.01 regardless of the configuration on the connected peer.
- Autonegotiation—The interface automatically negotiates with the connected peer to determine the DCBX version the peers use. Autonegotiation is the default DCBX mode.

If you configure a DCBX mode on an interface, the interface ignores DCBX protocol data units (PDUs) it receives from the connected peer if the PDUs do not match the DCBX version configured on the interface. For example, if you configure an interface to use IEEE DCBX and the connected peer sends DCBX version 1.01 LLDP PDUs, the interface ignores the version 1.01 PDUs. If you configure an interface to use DCBX version 1.01 and the peer sends IEEE DCBX LLDP PDUs, the interface ignores the IEEE DCBX PDUs.



**NOTE:** On interfaces that use the IEEE DCBX mode, the `show dcbx neighbors interface interface-name` operational command does not include application, PFC, or ETS operational state in the output.

### ***Autonegotiation***

Autonegotiation is the default DCBX mode. Each interface automatically negotiates with its connected peer to determine the DCBX version that both interfaces use to exchange DCBX information.

When an interface connects to its peer interface, the interface advertises IEEE DCBX TLVs to the peer. If the interface receives one IEEE DCBX PDU from the peer, the interface sets the DCBX mode as IEEE DCBX. If the interface receives three DCBX version 1.01 TLVs from the peer, the interface sets DCBX version 1.01 as the DCBX mode.

Autonegotiation works slightly differently on QFX3500 switches and QFabric systems:

- QFX3500 switch—When an interface connects to its peer interface, the interface advertises IEEE DCBX TLVs to the peer. If the interface receives an IEEE DCBX TLV from the peer, the interface sets IEEE DCBX as the DCBX mode. If the interface receives three consecutive DCBX version 1.01 TLVs from the peer, the interface sets DCBX version 1.01 as the DCBX mode.
- QFabric system—When an interface connects to its peer interface, the interface advertises DCBX version 1.01 TLVs to the peer. If the interface receives an IEEE DCBX TLVs from the peer, the interface sets IEEE DCBX as the DCBX mode. If the interface receives three consecutive DCBX version 1.01 TLVs from the peer, the interface retains DCBX version 1.01 as the DCBX mode.



**NOTE:** If the link flaps or the LLDP process restarts, the interface starts the autonegotiation process again. The interface does not use the last received DCBX communication mode.



### **CNA Support for DCBX Modes**

Different CNA vendors support different versions and capabilities of DCBX. The DCBX configuration you use on QFX Series interfaces depends on the DCBX features that the CNAs in your network support.

### **Interface Support for DCBX**

You can configure DCBX on 10-Gigabit Ethernet interfaces and on link aggregation group (LAG) interfaces whose member interfaces are all 10-Gigabit Ethernet interfaces.

### **DCBX Attribute Types**

DCBX has three attribute types:

- **Informational**—These attributes are exchanged using LLDP, but do not affect DCBX state or operation; they only communicate information to the peer. For example, application priority TLVs are informational TLVs.
- **Asymmetric**—The values for these types of attributes do not have to be the same on the connected peer interfaces. Peers exchange asymmetric attributes when the attribute values can differ on each peer interface. The peer interface configurations might match or they might differ. For example, ETS Configuration and Recommendation TLVs are asymmetric TLVs.
- **Symmetric**—The intention is that the values for these types of attributes should be the same on both of the connected peer interfaces. Peer interfaces exchange symmetric attributes to ensure symmetric DCBX configuration for those attributes. For example, PFC Configuration TLVs are symmetric TLVs.

The following sections describe asymmetric and symmetric DCBX attributes:

- [Asymmetric Attributes on page 4467](#)
- [Symmetric Attributes on page 4468](#)

### **Asymmetric Attributes**

DCBX passes asymmetric attributes between connected peer interfaces to communicate parameter information about those attributes (features). The resulting configuration for an attribute might be different on each peer, so the parameters configured on one interface might not match the parameters on the connected peer interface.

There are two types of asymmetric attribute TLVs:

- **Configuration TLV**—Configuration TLVs communicate the current operational state and the state of the “willing” bit. The “willing” bit communicates whether or not the interface is willing to accept and use the configuration from the peer interface. If an interface is “willing,” the interface uses the configuration it receives from the peer interface. (The peer interface configuration can override the configuration on the “willing” interface.) If an interface is “not willing,” the configuration on the interface cannot be overridden by the peer interface configuration.
- **Recommendation TLV**—Recommendation TLVs communicate the parameters the interface recommends that the connected peer interface should use. When an interface



sends a Recommendation TLV, if the connected peer is “willing,” the connected peer changes its configuration to match the parameters in the Recommendation TLV.

### ***Symmetric Attributes***

DCBX passes symmetric attributes between connected peer interfaces to communicate parameter information about those attributes (features), with the objective that both interfaces should use the same configuration. The intent is that the parameters configured on one interface should match the parameters on the connected peer interface.

There is one type of symmetric attribute TLV, the Configuration TLV. As with asymmetric attributes, symmetric attribute Configuration TLVs communicate the current operational state and the state of the “willing” bit. “Willing” interfaces use the peer interface parameter values for the attribute. (The attribute configuration of the peer overrides the configuration on the “willing” interface.)

### **DCBX Application Protocol TLV Exchange**

---

DCBX advertises the switch’s capabilities for Layer 2 applications such as FCoE and Layer 4 applications such as iSCSI:

- [Application Protocol TLV Exchange on page 4468](#)
- [FCoE Application Protocol TLV Exchange on page 4468](#)
- [Disabling Application Protocol TLV Exchange on page 4469](#)

### ***Application Protocol TLV Exchange***

For all applications, DCBX advertises the application’s state and IEEE 802.1p code points on the interfaces to which the application is mapped. If an application is not mapped to an interface, that interface does not advertise the application’s TLVs. There is an exception for FCoE application protocol TLV exchange when FCoE is the only application you want DCBX to advertise on an interface.

### ***FCoE Application Protocol TLV Exchange***

Protocol TLV exchange for the FCoE application depends on whether FCoE is the only application you want the interface to advertise or whether you want the interface to exchange other application TLVs in addition to FCoE TLVs.

If FCoE is the only application you want DCBX to advertise on an interface, DCBX exchanges FCoE application protocol TLVs by default if the interface:

- Carries FCoE traffic (traffic mapped by CoS configuration to the FCoE forwarding class)
- Has a congestion notification profile with PFC enabled on the FCoE priority (IEEE 802.1p code point)
- Does *not* have an application map



**NOTE:** If no CoS configuration for FCoE is mapped to an interface, that interface does not exchange FCoE application protocol TLVs.

---



If you want DCBX to advertise FCoE and other applications on an interface, you must specify all of the applications, including FCoE, in an application map, and apply the application map to the desired interfaces.



**NOTE:** If an application map is applied to an interface, the FCoE application must be explicitly configured in the application map, or the interface does not exchange FCoE TLVs.

When DCBX advertises the FCoE application, it advertises the FCoE state and IEEE 802.1p code points. If a peer device connected to a switch interface does not support FCoE, DCBX uses autonegotiation to mark the interface as “FCoE down,” and FCoE is disabled on that interface.

### ***Disabling Application Protocol TLV Exchange***

To disable DCBX application protocol exchange for all applications on an interface, issue the **set protocols dcbx interface *interface-name* applications no-auto-negotiation** command.

You can also disable DCBX application protocol exchange for applications on an interface by deleting the application map from the interface, or by deleting a particular application from the application map. However, when you delete an application from an application map, the application protocol is no longer exchanged on any interface which uses that application map.

## **DCBX and PFC**

After you enable PFC on a switch interface, DCBX uses autonegotiation to control the operational state of the PFC functionality.

If the peer device connected to the interface supports PFC and is provisioned compatibly with the switch, DCBX sets the PFC operational state to enabled. If the peer device connected to the interface does not support PFC or is not provisioned compatibly with the switch, DCBX sets the operational state to disabled. (PFC must be symmetrical.)

If the peer advertises that it is “willing” to learn its PFC configuration from the switch, DCBX pushes the switch’s PFC configuration to the peer and does not check the peer’s administrative state.

You can manually override DCBX control of the PFC operational state on a per-interface basis by disabling autonegotiation. If you disable autonegotiation on an interface on which you have configured PFC, then PFC is enabled on that interface regardless of the peer configuration. To disable PFC on an interface, do not configure PFC on that interface.

## **DCBX and ETS**

This section describes:

- [Default DCBX ETS Advertisement on page 4470](#)
- [ETS Advertisement and Peer Configuration on page 4470](#)
- [ETS Recommendation TLV on page 4470](#)



### ***Default DCBX ETS Advertisement***

If you do not configure ETS on an interface, the switch automatically creates a default priority group that contains all of the priorities (forwarding classes, which represent output queues) and assigns 100 percent of the port output bandwidth to that priority group. The default priority group is transparent. It does not appear in the configuration and is used for DCBX advertisement. DCBX advertises the default priority group, its priorities, and the assigned bandwidth.

If you configure ETS on an interface, DCBX advertises:

- Each priority group on the interface
- The priorities in each priority group
- The bandwidth properties of each priority group and priority

Any priority on that interface that is not part of an explicitly configured priority group (forwarding class set) is assigned to the automatically generated default priority group and receives no bandwidth. If you configure ETS on an interface, every forwarding class (priority) on that interface for which you want to forward traffic must belong to a forwarding class set (priority group).

### ***ETS Advertisement and Peer Configuration***

DCBX does not control the switch's ETS (hierarchical scheduling) operational state. If the connected peer is configured as "willing," DCBX pushes the switch's ETS configuration to the switch's peers if the ETS Recommendation TLV is enabled (it is enabled by default). If the peer does not support ETS or is not consistently provisioned with the switch, DCBX does not change the ETS operational state on the switch. The ETS operational state remains enabled or disabled based only on the switch hierarchical scheduling configuration and is enabled by default.

When ETS is configured, DCBX advertises the priority groups, the priorities in the priority groups, and the bandwidth configuration for the priority groups and priorities. Any priority (essentially a forwarding class or queue) that is not part of a priority group has no scheduling properties and receives no bandwidth.

You can manually override whether DCBX advertises the ETS state to the peer on a per-interface basis by disabling autonegotiation. This does not affect the ETS state on the switch or on the peer, but it does prevent the switch from sending the Recommendation TLV or the Configuration TLV to the connected peer. To disable ETS on an interface, do not configure priority groups (forwarding class sets) on the interface.

### ***ETS Recommendation TLV***

The ETS Recommendation TLV communicates the ETS settings that the switch wants the connected peer interface to use. If the peer interface is "willing," it changes its configuration to match the configuration in the ETS Recommendation TLV. By default, the switch interfaces send the ETS Recommendation TLV to the peer. The settings communicated are the egress ETS settings defined by configuring hierarchical scheduling on the interface.



We recommend that you use the same ETS settings on the connected peer that you use on the switch interface and that you leave the ETS Recommendation TLV enabled. However, on interfaces that use IEEE DCBX as the DCBX mode, if you want an asymmetric configuration between the switch interface and the connected peer, you can disable the ETS Recommendation TLV by including the **recommendation-tlv no-auto-negotiation** statement at the **[edit protocols dcbx interface *interface-name* enhanced-transmission-selection]** hierarchy level.



**NOTE:** You can disable the ETS Recommendation TLV only when the DCBX mode on the interface is IEEE DCBX. Disabling the ETS Recommendation TLV has no effect if the DCBX mode on the interface is DCBX version 1.01. (IEEE DCBX uses separate application attribute TLVs, but DCBX version 1.01 sends all application attributes in the same TLV and uses sub-TLVs to separate the information.)

If you disable the ETS Recommendation TLV, the switch still sends the ETS Configuration TLV to the connected peer. The result is that the connected peer is informed about the switch DCBX ETS configuration, but even if the peer is “willing,” the peer does not change its configuration to match the switch configuration. This is asymmetric configuration—the two interfaces can have different parameter values for the ETS attribute.

For example, if you want a CNA connected to a switch interface to have different bandwidth allocations than the switch ETS configuration, you can disable the ETS Recommendation TLV and configure the CNA for the desired bandwidth. The switch interface and the CNA exchange configuration parameters, but the CNA does not change its configuration to match the switch interface configuration.

#### Related Documentation

- [Understanding DCBX Application Protocol TLV Exchange on page 4472](#)
- [Understanding DCB Features and Requirements on page 4389](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)
- [Understanding CoS Hierarchical Port Scheduling \(ETS\) on page 4872](#)
- [Understanding FCoE on page 4392](#)
- [Configuring the DCBX Mode on page 4600](#)
- [Configuring DCBX Autonegotiation on page 4601](#)
- [Disabling the ETS Recommendation TLV on page 4604](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)



## Understanding DCBX Application Protocol TLV Exchange

Data Center Bridging Capability Exchange protocol (DCBX) discovers the data center bridging (DCB) capabilities of connected peers. DCBX also advertises the capabilities of applications on interfaces by exchanging application protocol information through application type, length, and value (TLV) elements. DCBX is an extension of Link Layer Discovery Protocol (LLDP). LLDP must remain enabled on every interface on which you want to use DCBX.



**NOTE:** LLDP and DCBX are enabled by default on all interfaces.

---

Setting up application protocol exchange consists of:

- Defining applications
- Mapping the applications to IEEE 802.1p code points in an *application map*
- Configuring classifiers to prioritize incoming traffic and map the incoming traffic to the application by the traffic code points
- Applying the application maps and classifiers to interfaces

You need to explicitly define the applications that you want an interface to advertise. The FCoE application is a special case (see [“Applications” on page 4472](#)) and only needs to be defined on an interface if you want DCBX to exchange application protocol TLVs for other applications in addition to FCoE on that interface.

You also need to explicitly map all defined applications that you want an interface to advertise to IEEE 802.1p code points in an application map. The FCoE application is a special case (see [“Application Maps” on page 4473](#)) and only requires inclusion in an application map when you want an interface to use DCBX for other applications in addition to FCoE, as described later in this topic.

This topic describes:

- [Applications on page 4472](#)
- [Application Maps on page 4473](#)
- [Classifying and Prioritizing Application Traffic on page 4474](#)
- [Enabling Interfaces to Exchange Application Protocol Information on page 4475](#)
- [Disabling DCBX Application Protocol Exchange on page 4475](#)

---

### Applications

Before an interface can exchange application protocol information, you need to define the applications that you want to advertise, except FCoE if FCoE is the only application that you want the interface to advertise.





**NOTE:** If FCoE is the only application that you want DCBX to advertise on an interface, DCBX exchanges FCoE application protocol TLVs by default if the interface:

- Carries FCoE traffic (traffic mapped by CoS configuration to the FCoE forwarding class and applied to the interface)
- Has a congestion notification profile with PFC enabled on the FCoE priority (IEEE 802.1p code point)
- Does *not* have an application map

If you apply an application map to an interface, then all applications that you want DCBX to advertise must be defined and configured in the application map, including the FCoE application.

If no CoS configuration for FCoE is mapped to an interface, that interface does not exchange FCoE application protocol TLVs.

You can define:

- Layer 2 applications by EtherType
- Layer 4 applications by a combination of protocol (TCP or UDP) and destination port number

The EtherType is a two-octet field in the Ethernet frame that denotes the protocol encapsulated in the frame. For a list of common EtherTypes, see <http://standards.ieee.org/develop/regauth/ethertype/eth.txt> on the IEEE standards organization website. For a list of port numbers and protocols, see the *Service Name and Transport Protocol Port Number Registry* at <http://www.iana.org/assignments/service-names-port-numbers/service-names-port-numbers.xml> on the Internet Assigned Numbers Authority (IANA) website.

You must explicitly define each application that you want to advertise, except FCoE. The FCoE application is defined by default (EtherType 0x8906).

### Application Maps

An application map maps defined applications to one or more IEEE 802.1p code points. Each application map contains one or more applications. DCBX includes the configured application code points in the protocol TLVs exchanged with the connected peer.

To exchange protocol TLVs for an application, you must include the application in an application map. The FCoE application is a special case:

- If you want DCBX to exchange application protocol TLVs for more than one application on a particular interface, you must configure the applications, define an application map to map the applications to code points, and apply the application map to the interface. In this case, you must also define the FCoE application and add it to the application map.



This is the same process and treatment required for all other applications. In addition, for DCBX to exchange FCoE application TLVs, you must enable priority-based flow control (PFC) on the FCoE priority (the FCoE IEEE 802.1p code point) on the interface.

- If FCoE is the only application that you want DCBX to advertise on an interface, then you do not need to configure an application map and apply it to the interface. By default, when an interface has no application map, and the interface carries traffic mapped to the FCoE forwarding class, and PFC is enabled on the FCoE priority, the interface advertises FCoE TLVs (autonegotiation mode). DCBX exchanges FCoE application protocol TLVs by default until you apply an application map to the interface, remove the FCoE traffic from the interface (you can do this by removing the or editing the classifier for FCoE traffic), or disable PFC on the FCoE priority.

If you apply an application map to an interface that did not have an application map and was exchanging FCoE application TLVs, and you do not include the FCoE application in the application map, the interface stops exchanging FCoE TLVs. Every interface that has an application map must have FCoE included in the application map (and PFC enabled on the FCoE priority) in order for DCBX to exchange FCoE TLVs.

Mapping an application to code points does two things:

- Maps incoming traffic with the same code points to that application
- Allows you to configure classifiers that map incoming application traffic, by code point, to a forwarding class and a loss priority, in order to apply class of service (CoS) to application traffic and prioritize application traffic

You apply an application map to an interface to enable DCBX application protocol exchange on that interface for each application specified in the application map. All of the applications that you want an interface to advertise must be configured in the application map that you apply to the interface, with the previously noted exception for the FCoE application when FCoE is the only application for which you want DCBX to exchange protocol TLVs on an interface.

---

### Classifying and Prioritizing Application Traffic

---

When traffic arrives at an interface, the interface classifies the incoming traffic based on its code points. Classifiers map code points to loss priorities and forwarding classes. The loss priority prioritizes the traffic. The forwarding class determines the traffic output queue and CoS service level.

When you map an application to an IEEE 802.1p code point in an application map and apply the application map to an interface, incoming traffic on the interface that matches the application code points is mapped to the appropriate application. The application receives the loss priority and the CoS associated with the forwarding class for those code points, and is placed in the output queue associated with the forwarding class.

You can use the default classifier or you can configure a classifier to map the application code points defined in the application map to forwarding classes and loss priorities.



### Enabling Interfaces to Exchange Application Protocol Information

Each interface with the **fcoe** forwarding class and PFC enabled on the FCoE code point is enabled for FCoE application protocol exchange by default until you apply an application map to the interface. If you apply an application map to an interface and you want that interface to exchange FCoE application protocol TLVs, you must include the FCoE application in the application map. (In all cases, to achieve lossless transport, you must also enable PFC on the FCoE code point or code points.)

Except when FCoE is the only protocol you want DCBX to advertise on an interface, interfaces on which you want to exchange application protocol TLVs must include the following two items:

- The application map that contains the application(s)
- A classifier



**NOTE:** You must also enable PFC on the code point of any traffic for which you want to achieve lossless transport.

### Disabling DCBX Application Protocol Exchange

To disable DCBX application protocol exchange for all applications on an interface, issue the **set protocols dcbx interface *interface-name* applications no-auto-negotiation** command.

You can also disable DCBX application protocol exchange for applications on an interface by deleting the application map from the interface, or by deleting a particular application from the application map. However, when you delete an application from an application map, the application protocol is no longer exchanged on any interface which uses that application map.

On interfaces that use IEEE DCBX mode to exchange DCBX parameters, you can disable sending the enhanced transmission selection (ETS) Recommendation TLV to the peer if you want an asymmetric ETS configuration between the peers.

#### Related Documentation

- [Understanding DCBX on page 4463](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Configuring DCBX Autonegotiation on page 4601](#)
- [Disabling the ETS Recommendation TLV on page 4604](#)
- [Defining an Application for DCBX Application Protocol TLV Exchange on page 4604](#)
- [Configuring an Application Map for DCBX Application Protocol TLV Exchange on page 4606](#)
- [Applying an Application Map to an Interface for DCBX Application Protocol TLV Exchange on page 4607](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)



- [Example: Configuring Unicast Classifiers on page 5014](#)

## Understanding CoS Flow Control (Ethernet PAUSE and PFC)

Flow control supports lossless transmission by regulating traffic flows so that frames are not dropped during periods of congestion. Flow control stops and resumes the transmission of network traffic between two nodes on a full-duplex Ethernet physical link. Controlling the flow prevents buffers on the nodes from overflowing and dropping frames. You configure flow control on a per-interface basis.

The QFX Series supports two methods of flow control:

- IEEE 802.3X Ethernet PAUSE
- IEEE 802.1Qbb priority-based flow control (PFC)

Both Ethernet PAUSE and PFC are link-level flow control mechanisms.

Ethernet PAUSE pauses transmission of all traffic on a link.

PFC decouples the pause function from the physical link and enables you to divide traffic on one physical link into eight priorities. You can think of the eight priorities as eight “lanes” of traffic that are mapped to forwarding classes and output queues. Each priority is mapped to a 3-bit IEEE 802.1p CoS code point flag in the VLAN header. You can enable PFC on one or more priorities (IEEE 802.1p code points) on a link. When PFC-enabled traffic is paused on a link, traffic that is not PFC-enabled continues to flow (or is dropped if congestion is severe enough).

Use Ethernet PAUSE when you want to prevent packet loss on all of the traffic on a link. Use PFC to prevent traffic loss only on specified types of traffic (for example, Fibre Channel over Ethernet traffic).



**NOTE:** Depending on the amount of traffic on a link or assigned to a priority, pausing traffic can cause head-of-line blocking and spread congestion through the network.

---

If you attempt to configure both Ethernet PAUSE and PFC on a link, the switch returns a commit error. Ethernet PAUSE and PFC are mutually exclusive configurations on an interface.

By default, all forms of flow control are disabled. You must explicitly enable flow control on interfaces to pause traffic.

- [Ethernet PAUSE on page 4477](#)
- [PFC on page 4480](#)
- [Lossless Transport Support on page 4482](#)



## Ethernet PAUSE

Ethernet PAUSE is a congestion relief feature that works by providing link-level flow control for all traffic on a full-duplex Ethernet link. Ethernet PAUSE works in both directions on the link. In one direction, an interface generates and sends PAUSE messages to stop the connected peer from sending more traffic. In the other direction, the interface responds to PAUSE messages it receives from the connected peer to stop sending traffic. Ethernet PAUSE also works on aggregated Ethernet interfaces. For example, if the connected peer interfaces are called Node A and Node B:

- When the receive buffers on interface Node A reach a certain level of fullness, the interface generates and sends a PAUSE message to the connected peer (interface Node B) to tell the peer to stop sending frames. The Node B buffers store frames until the time period specified in the PAUSE frame elapses; then Node B resumes sending frames to Node A.
- When interface Node A receives a PAUSE message from interface Node B, interface Node A stops transmitting frames until the time period specified in the PAUSE frame elapses; then Node A resumes transmission. (The Node A transmit buffers store frames until Node A resumes sending frames to Node B.)

In this scenario, if Node B sends a PAUSE frame with a time value of 0 to Node A, the 0 time value indicates to Node A that it can resume transmission. This happens when the Node B buffer empties to below a certain threshold and the buffer can once again accept traffic.

*Symmetric flow control* means an interface has the same PAUSE configuration in both directions. The PAUSE generation and PAUSE response functions are both configured as enabled or they are both disabled. You configure symmetric flow control by including the **flow-control** statement at the **[edit interfaces *interface-name* ether-options]** hierarchy level.

*Asymmetric flow control* allows you to configure the PAUSE functionality in each direction independently on an interface. The configuration for generating PAUSE messages and for responding to PAUSE messages does not have to be the same. It can be enabled in both directions, disabled in both directions, or enabled in one direction and disabled in the other direction. You configure asymmetric flow control by including the **configured-flow-control** statement at the **[edit interfaces *interface-name* ether-options]** hierarchy level.

On any particular interface, symmetric and asymmetric flow control are mutually exclusive. Asymmetric flow control overrides and disables symmetric flow control. (If PFC is configured on an interface, the PFC configuration overrides Ethernet PAUSE flow control.) The QFX Series supports both symmetric and asymmetric flow control.

- [Symmetric Flow Control on page 4477](#)
- [Asymmetric Flow Control on page 4478](#)

### *Symmetric Flow Control*

Symmetric flow control configures both the receive and transmit buffers in the same state. The interface can both send PAUSE messages and respond to them (flow control



is enabled), or the interface cannot send PAUSE messages or respond to them (flow control is disabled).

When you enable symmetric flow control on an interface, the PAUSE behavior depends on the configuration of the connected peer. With symmetric flow control enabled, the interface can perform any PAUSE functions that the connected peer can perform. (When symmetric flow control is disabled, the interface does not send or respond to PAUSE messages.)

### ***Asymmetric Flow Control***

Asymmetric flow control enables you to specify independently whether or not the interface receive buffer generates and sends PAUSE messages to stop the connected peer from transmitting traffic, and whether or not the interface transmit buffer responds to PAUSE messages it receives from the connected peer and stops transmitting traffic. The receive buffer configuration determines if the interface transmits PAUSE messages, and the transmit buffer configuration determines if the interface receives and responds to PAUSE messages:

- Receive buffers on—Enable PAUSE transmission (generate and send PAUSE frames)
- Transmit buffers on—Enable PAUSE reception (respond to received PAUSE frames)

You must explicitly set the flow control for both the receive buffer and the transmit buffer (**on** or **off**) to configure asymmetric PAUSE. [Table 309 on page 4478](#) describes the configured flow control state when you set the receive (Rx) and transmit (Tx) buffers on an interface:

**Table 309: Asymmetric Ethernet PAUSE Flow Control Configuration**

| Receive (Rx) Buffer | Transmit (Tx) Buffer | Configured Flow Control State                                                                                                                                                                                |
|---------------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| On                  | Off                  | Interface generates and sends Ethernet PAUSE messages. Interface does not respond to PAUSE messages (interface continues to transmit even if peer requests that the interface stop sending traffic).         |
| Off                 | On                   | Interface responds to Ethernet PAUSE messages received from the connected peer, but does not generate or send PAUSE messages. (The interface does not request that the connected peer stop sending traffic.) |
| On                  | On                   | Same functionality as symmetric Ethernet PAUSE. Interface generates and sends PAUSE messages and responds to received PAUSE messages.                                                                        |
| Off                 | Off                  | Ethernet PAUSE flow control is disabled.                                                                                                                                                                     |

The configured flow control is the PAUSE state configured on the interface.

On 1-Gigabit Ethernet interfaces, the QFX Series supports autonegotiation of Ethernet PAUSE with the connected peer. (The QFX Series does not support autonegotiation on 10-Gigabit Ethernet interfaces.) Autonegotiation enables the interface to exchange state advertisements with the connected peer so that the two devices can agree on the PAUSE configuration. Each interface advertises its flow control state to the connected peer using a combination of the PAUSE and ASM\_DIR bits, as described in [Table 310 on page 4479](#):



Table 310: Flow Control State Advertised to the Connected Peer (Autonegotiation)

| Rx Buffer State | Tx Buffer State | PAUSE Bit | ASM_DIR Bit | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------|-----------------|-----------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Off             | Off             | 0         | 0           | The interface advertises no PAUSE capability. This is equivalent to disabling flow control on an interface.                                                                                                                                                                                                                                                                                                                                                            |
| On              | On              | 1         | 0           | The interface advertises symmetric flow control (both the transmission of PAUSE messages and the ability to receive and respond to PAUSE messages).                                                                                                                                                                                                                                                                                                                    |
| On              | Off             | 0         | 1           | The interface advertises asymmetric flow control (the transmission of PAUSE messages, but not the ability to receive and respond to PAUSE messages).                                                                                                                                                                                                                                                                                                                   |
| Off             | On              | 1         | 1           | The interface advertises both symmetric and asymmetric flow control. Although the interface does not generate and send PAUSE requests to the peer, the interface supports both symmetric and asymmetric PAUSE configuration on the peer because the peer is not affected if the peer does not receive PAUSE requests. (If the interface responds to the peer's PAUSE requests, that is sufficient to support either symmetric or asymmetric flow control on the peer.) |

The flow control configuration on each switch interface interacts with the flow control configuration of the connected peer. Each peer advertises its state to the other peer. The interaction of the flow control configuration of the peers determines the flow control behavior (resolution) between them, as shown in [Table 311 on page 4480](#). The first four columns show the PAUSE configuration on the local QFX Series and on the connected peer (also known as the link partner). The last two columns show the PAUSE resolution that results from the local and peer configurations on each interface. This illustrates how the PAUSE configuration of each interface affects the PAUSE behavior on the other interface.



**NOTE:** In the Resolution columns of the table, disabling PAUSE transmit means that the interface receive buffers do not generate and send PAUSE messages to the peer. Disabling PAUSE receive means that the interface transmit buffers do not respond to PAUSE messages received from the peer.



Table 311: Asymmetric Ethernet PAUSE Behavior on Local and Peer Interfaces

| Local Interface (QFX Series) |             | Peer Interface |             | Local Resolution                                | Peer Resolution                                 |
|------------------------------|-------------|----------------|-------------|-------------------------------------------------|-------------------------------------------------|
| PAUSE Bit                    | ASM_DIR Bit | PAUSE Bit      | ASM_DIR Bit |                                                 |                                                 |
| 0                            | 0           | Don't care     | Don't care  | Disable PAUSE transmit and receive              | Disable PAUSE transmit and receive              |
| 0                            | 1           | 0              | Don't care  | Disable PAUSE transmit and receive              | Disable PAUSE transmit and receive              |
| 0                            | 1           | 1              | 0           | Disable PAUSE transmit and receive              | Disable PAUSE transmit and receive              |
| 0                            | 1           | 1              | 1           | Enable PAUSE transmit and disable PAUSE receive | Disable PAUSE transmit and enable PAUSE receive |
| 1                            | 0           | 0              | Don't care  | Disable PAUSE transmit and receive              | Disable PAUSE transmit and receive              |
| 1                            | 0           | 1              | Don't care  | Enable PAUSE transmit and receive               | Enable PAUSE transmit and receive               |
| 1                            | 1           | 0              | 0           | Disable PAUSE transmit and receive              | Disable PAUSE transmit and receive              |
| 1                            | 1           | 0              | 1           | Enable PAUSE receive and disable PAUSE transmit | Enable PAUSE transmit and disable PAUSE receive |
| 1                            | 1           | Don't care     | Don't care  | Enable PAUSE transmit and receive               | Enable PAUSE transmit and receive               |



**NOTE:** For your convenience, [Table 311 on page 4480](#) replicates Table 28B-3 of Section 2 of the IEEE 802.X specification.

## PFC

PFC is a lossless transport and congestion relief feature that works by providing granular link-level flow control for each IEEE 802.1p code point (priority) on a full-duplex Ethernet link. When the switch receive buffer fills to a threshold, the switch sends a pause frame to the sender to temporarily stop the sender from transmitting more frames. The buffer threshold must be low enough so that the sender has time to stop transmitting frames and the receiver can accept the frames already on the wire before the buffer overflows. The switch automatically sets queue buffer thresholds to prevent frame loss.

All of the other priorities on the link continue to send frames. Only the frames sent with the paused priority are not transmitted. When the receive buffer empties below another threshold, the switch sends a message that starts the flow again.



Configure PFC for a priority end to end along the entire data path to create a lossless lane of traffic on the network. You can selectively pause the traffic in any queue without pausing the traffic for other queues on the same link. You can create lossless lanes for traffic such as Fibre Channel over Ethernet (FCoE), LAN backup, or management while using standard frame-drop congestion management for IP traffic on the same link.

Potential consequences of link-level flow control are:

- Head-of-line blocking
- A paused priority that caused upstream devices to pause the same priority, thus spreading congestion back through the network

By definition, PFC supports symmetric pause only (as opposed to Ethernet PAUSE, which supports symmetric and asymmetric pause). With symmetric pause, a device can:

- Transmit pause frames to pause incoming traffic.
- Receive pause frames and stop sending traffic to a device whose buffer is too full to accept more frames.

When it receives a PFC frame, the QFX Series pauses traffic on egress queues based on the priorities that the PFC pause frame identifies. The priorities are 0 through 7. By default, the priorities map to queue numbers 0 through 7, respectively, and to specific forwarding classes, as shown in [Table 312 on page 4481](#):

**Table 312: Default PFC Priority to Queue and Forwarding Class Mapping**

| IEEE 802.1p Priority (Code Point) | Queue | Forwarding Class |
|-----------------------------------|-------|------------------|
| 0 (000)                           | 0     | best-effort      |
| 1 (001)                           | 1     | best-effort      |
| 2 (010)                           | 2     | best-effort      |
| 3 (011)                           | 3     | fcoe             |
| 4 (100)                           | 4     | no-loss          |
| 5 (101)                           | 5     | best-effort      |
| 6 (110)                           | 6     | network-control  |
| 7 (111)                           | 7     | network-control  |

For example, when the QFX Series receives a PFC pause frame that pauses priority 3, queue 3 is paused. If you do not want to use the default configuration, you can configure customized mapping of priorities to different queues and forwarding classes.





**NOTE:** By convention, deployments with converged server access typically use IEEE 802.1p priority 3 for FCoE traffic. The default forwarding class configuration sets the `fcoe` forwarding class as a lossless forwarding class that is mapped to queue 3, and default classifiers map incoming priority 3 traffic to the `fcoe` forwarding class. However, you must apply PFC to the entire FCoE data path to configure the end-to-end lossless behavior that FCoE traffic requires. If your network uses priority 3 for FCoE traffic, we recommend that you use the default configuration. If your network uses a priority other than 3 for FCoE traffic, you can configure lossless FCoE transport on any IEEE 802.1p priority as described in [“Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows” on page 4896](#) and [“Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway” on page 4911](#).

You enable PFC on a priority on an ingress interface by configuring an input CNP and then associating the CNP with an interface. The CNP enables PFC on a specified IEEE 802.1 code point. When you associate the CNP with an interface, ingress traffic mapped to that priority uses PFC to pause transmission whenever the queue buffer fills to the pause threshold.

Although unicast traffic and multdestination (multicast, broadcast, and destination lookup fail) traffic must use different classifiers, you can map a unicast queue (queue 0 through 7) and a multdestination queue (queue 8, 9, 10, or 11) to the same PFC priority so that both unicast and multicast traffic use that priority. Do not map multdestination traffic to lossless priorities. Starting with Junos OS Release 12.3, you can map one priority to multiple output queues.



**NOTE:** You can attach a maximum of one CNP to an interface, but you can create an unlimited number of CNPs.

---

### Lossless Transport Support

---

The QFX Series supports up to six lossless forwarding classes. For lossless transport, you must enable PFC on the IEEE 802.1p priority (code point) of lossless forwarding classes.

The following limitation applies to support lossless transport on QFabric systems only:

- The internal cable length from the QFabric system Node device to the QFabric system Interconnect device cannot exceed 150 meters.

The default CoS configuration provides two lossless forwarding classes, `fcoe` and `no-loss`. If you explicitly configure lossless forwarding classes, you must include the `no-loss` packet drop attribute to enable lossless behavior, or the traffic is not lossless. For both default and explicit configuration, you must configure CNPs to enable PFC on the priority of the lossless traffic.





**NOTE:** Junos OS Release 12.2 introduced changes to the way the QFX Series handles lossless forwarding classes (the `fcoe` and `no-loss` forwarding classes).

In Junos OS Release 12.1, both explicitly configuring the `fcoe` and `no-loss` forwarding classes and using the default configuration for these forwarding classes resulted in the same lossless behavior for traffic mapped to those forwarding classes.

However, in Junos OS Release 12.2, if you explicitly configure the `fcoe` or the `no-loss` forwarding class, that forwarding class is no longer treated as a lossless forwarding class. Traffic mapped to these forwarding classes is treated as lossy (best-effort) traffic. This is true even if the explicit configuration is exactly the same as the default configuration.

If your CoS configuration from Junos OS Release 12.1 or earlier includes the explicit configuration of the `fcoe` or the `no-loss` forwarding class, then when you upgrade to Junos OS Release 12.2, those forwarding classes are not lossless. To preserve the lossless treatment of these forwarding classes, delete the explicit `fcoe` and `no-loss` forwarding class configuration before you upgrade to Junos OS Release 12.2.

See “[Overview of CoS Changes Introduced in Junos OS Release 12.2](#)” on [page 4820](#) for detailed information about this change and how to delete an existing lossless configuration.

In Junos OS Release 12.3, the default behavior of the `fcoe` and `no-loss` forwarding classes is the same as in Junos OS Release 12.2. However, in Junos OS Release 12.3, you can configure up to six lossless forwarding classes. All explicitly configured lossless forwarding classes must include the new `no-loss` packet drop attribute or the forwarding class is lossy.

#### Related Documentation

- [Overview of CoS Changes Introduced in Junos OS Release 12.2 on page 4820](#)
- [Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896](#)
- [Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 4911](#)
- [Understanding DCB Features and Requirements on page 4389](#)
- [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
- [Enabling and Disabling CoS Symmetric Ethernet PAUSE Flow Control on page 5148](#)
- [Configuring CoS Asymmetric Ethernet PAUSE Flow Control on page 5149](#)
- [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)

## Understanding Fibre Channel Terminology

To understand the Fibre Channel (FC) and Fibre Channel over Ethernet (FCoE) capabilities of the QFX Series, you should become familiar with the terms defined in [Table 313 on page 4484](#).



Table 313: Fibre Channel Terms

| Term                            | Definition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| addressing mode                 | <p>Format for the locally unique MAC address the FC switch assigns to FCoE devices for FCoE transactions after FIP establishes a connection between an FCoE device and the FC switch. The two addressing modes are <i>fabric-provided MAC address (FPMA)</i> and <i>server-provided MAC address (SPMA)</i>. The QFX Series supports only FPMA.</p> <p>During FLOGI or FDISC, the ENode advertises the addressing modes it supports. If the FC switch supports an addressing mode that the ENode uses, the virtual link can be established, and the devices can communicate.</p> <p>See also <i>fabric-provided MAC address (FPMA)</i> and <i>server-provided MAC address (SPMA)</i>.</p>      |
| ALL-ENode-MACs                  | <p>Well-known multicast MAC address to which all FCoE ENodes listen. FCFs send multicast <i>FIP discovery advertisement</i> messages and <i>FIP keepalive</i> messages to the ALL-ENode-MACs address so that ENodes can discover and maintain connections to FCFs. The hexadecimal format of the address is <b>01:10:18:01:00:01</b>.</p> <p>See also <i>well-known address (WKA)</i>.</p>                                                                                                                                                                                                                                                                                                    |
| ALL-FCF-MACs                    | <p>Well-known multicast MAC address to which all FCFs listen. ENodes send multicast <i>FIP discovery solicitation</i> messages to the ALL-FCF-MACs address to find out which FCFs can accept a login. The hexadecimal format of the address is <b>01:10:18:01:00:02</b>.</p> <p>See also <i>well-known address (WKA)</i>.</p>                                                                                                                                                                                                                                                                                                                                                                 |
| congestion notification         | See <i>quantized congestion notification (QCN)</i> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| converged network adapter (CNA) | <p>Physical adapter that combines the functions of a Fibre Channel <i>host bus adapter (HBA)</i> to process FCoE frames and a <i>lossless Ethernet network interface card (NIC)</i> to process non-FCoE Ethernet frames. CNAs have one or more Ethernet ports. CNAs encapsulate Fibre Channel frames in Ethernet for FCoE transport and de-encapsulate Fibre Channel frames from FCoE to native Fibre Channel.</p> <p>See also <i>host bus adapter (HBA)</i>.</p>                                                                                                                                                                                                                             |
| data center bridging (DCB)      | <p>Set of IEEE specifications that enhance Ethernet to allow it to support converged Ethernet (LAN) and Fibre Channel (SAN) traffic on one Ethernet network. DCB features include <i>priority-based flow control (PFC)</i>, <i>enhanced transmission selection (ETS)</i>, <i>Data Center Bridging Capability Exchange protocol (DCBX)</i>, <i>quantized congestion notification (QCN)</i>, and full-duplex 10-Gigabit Ethernet ports.</p> <p>See also <i>priority-based flow control (PFC)</i>, <i>Ethernet PAUSE</i>, <i>enhanced transmission selection (ETS)</i>, <i>Data Center Bridging Capability Exchange protocol (DCBX)</i>, and <i>quantized congestion notification (QCN)</i>.</p> |
| expansion port (E_Port)         | An expansion port in an FC switch/FCF that connects the FC switch/FCF to the E_Port of another FC switch/FCF to form an <i>Interswitch Link (ISL)</i> in a common FC fabric.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



Table 313: Fibre Channel Terms (*continued*)

| Term                                                     | Definition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Data Center Bridging Capability Exchange protocol (DCBX) | Discovery and exchange protocol for conveying configuration and capabilities among neighbors to ensure consistent configuration across the network. It is an extension of the Link Layer Data Protocol (LLDP, described in IEEE 802.1AB)<br><br>See also <i>data center bridging (DCB)</i> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| enhanced transmission selection (ETS)                    | Mechanism that provides finer granularity of bandwidth management within a link.<br><br>See also <i>data center bridging (DCB)</i> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| ENode                                                    | See <i>FCoE Node (ENode)</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| ENode MAC                                                | <i>Lossless Ethernet MAC</i> paired with an <i>FCoE controller</i> in an ENode.<br><br>See also <i>FCoE node (ENode)</i> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| ENode MAC address                                        | Globally unique address assigned to the CNA by the manufacturer and used to identify the node for FIP transactions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Ethernet PAUSE                                           | As defined in IEEE 802.3X, a flow control mechanism that temporarily stops the transmission of Ethernet frames on a link for a specified period. A receiving element sends an Ethernet PAUSE frame when a sender transmits data faster than the receiver can accept it. Ethernet PAUSE affects the entire link, not just an individual flow. An Ethernet PAUSE frame temporarily stops all traffic transmission on the link and allows the receiver's input buffer to empty sufficiently to restart traffic on the link. Ethernet PAUSE messages are sent to the previous hop and do not automatically propagate to the source of the congestion.<br><br>See also <i>priority-based flow control (PFC)</i> .                                                                                                                                                                                                                                                                                                                                           |
| fabric                                                   | Interconnection of network nodes using one or more network switches that function as a network single logical entity.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| fabric discovery (FDISC)                                 | Subsequent logins from the same ENode for different users, applications, or virtual machines after an ENode performs an initial FLOGI to log in to a switch.<br><br>FC and FIP FDISC messages serve the same function in FC and FCoE networks, respectively. N_Ports send FC FDISC messages to the FC switch and VN_Ports send FIP FDISC messages to the FCF.<br><br>After an N_Port acquires its initial N_Port ID through the FC FLOGI process, it can acquire additional N_Port IDs by sending an FC FDISC with a new worldwide port name and a source ID of 0x000000. The new port name and blank source ID tell the FC switch to assign a new N_Port ID to the N_Port. The different N_Port IDs allow multiple virtual machines or users on the N_Port to have separate, secure virtual links on the same physical N_Port. These additional ports are also referred to as VN_Ports.<br><br>FIP FDISC works the same way, except the VN_Port logs in using a FIP FLOGI message.<br><br>See also <i>fabric login (FLOGI)</i> and <i>N_Port ID</i> . |



Table 313: Fibre Channel Terms (*continued*)

| Term                               | Definition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| fabric login (FLOGI)               | <p>Creation of a logical connection to the FC switch and establishment of a node's operating environment.</p> <p>For FC devices, an N_Port logs in to the FC network by sending an FC FLOGI message to the F_Port of an FC switch.</p> <p>For FCoE devices, a VN_Port logs in to the FC network by sending a FIP FLOGI message to the VF_Port of an FC switch.</p>                                                                                                                                                                                                                                                                                                                 |
| fabric port (F_Port)               | <p>FC port on an FC switch or an FCF that connects point-to-point to an FC node port (N_Port) on an FC host (server or storage device). An F_Port provides access to fabric services for FC devices.</p> <p>F_Ports are intermediate ports in a connection between FC device end-point N_Ports. For example, a connection between an FC host server and an FC storage device through an FC switch looks like this: FC server N_Port to FC switch ingress F_Port to FC switch egress F_Port to FC storage device N_Port.</p> <p>See also <i>node port (N_Port)</i>.</p>                                                                                                             |
| fabric-provided MAC address (FPMA) | <p>MAC address that an FCF assigns to a single ENode MAC through the FLOGI or FDISC process that is unique to the local fabric. The FPMA uniquely identifies a single VN_Port at that ENode MAC in FCoE transactions with the FCF.</p> <p>Because an ENode can have more than one ENode MAC, an FCF can assign multiple FPMAs to an ENode, one FPMA per ENode MAC.</p> <p>An FPMA is a 48-bit value that consists of two 24-bit values, the N_Port ID and the FC-MAP value. The N_Port ID uniquely identifies the VN_Port and the FC-MAP value identifies the FCF.</p> <p>See also <i>FCoE node (ENode)</i>, <i>N_Port ID</i>, and <i>FCoE mapped address prefix (FC-MAP)</i>.</p> |
| FCF-MAC                            | Lossless Ethernet MAC paired with an FCoE controller in an FCF. The FCF-MAC enables the FCF to handle FCoE traffic.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| FCoE controller                    | <p>Instantiates and terminates VN_Port and VF_Port instances on an ENode. An ENode can have more than one FCoE controller. Each FCoE controller is paired with a lossless Ethernet MAC on the ENode.</p> <p>See also <i>lossless Ethernet MAC</i>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                             |
| FC forwarder (FCF)                 | Alternative term and acronym to refer to an FC switch that has all physical Fibre Channel ports and the necessary set of services as defined in the T11 Organization <i>Fibre Channel Switched Fabric (FC-SW)</i> standards.                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| FCoE forwarder (FCF)               | Defined by the <i>Fibre Channel Backbone - 5 (FC-BB-5) Rev 2.00</i> specification available at <a href="http://www.t11.org/ftp/t11/pub/fc/bb-5/09-056v5.pdf">http://www.t11.org/ftp/t11/pub/fc/bb-5/09-056v5.pdf</a> as a device that has the necessary set of services as defined in FC-SW and the FCoE capabilities to act as an FCoE-based FC switch.                                                                                                                                                                                                                                                                                                                           |



Table 313: Fibre Channel Terms (*continued*)

| Term                                | Definition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCoE Initialization Protocol (FIP)  | <p>Layer 2 protocol for endpoint discovery, fabric login, and fabric association. FIP enables FCoE devices and FC switches to discover one another. Through FIP, FCoE nodes can log in to an FC switch, access the SAN FC fabric, and communicate with target FC devices. FIP messages also maintain the connection between the FCoE initiator and the FCF.</p> <p>FIP has its own EtherType (0x8914) to distinguish its traffic from payload-carrying FCoE traffic and other Ethernet traffic.</p>                             |
| FCoE link endpoint (LEP)            | Virtual FC interface mapped onto a physical Ethernet interface to handle FC frame encapsulation and de-encapsulation and transmission and reception of FC frames encapsulated in Ethernet through a single virtual link.                                                                                                                                                                                                                                                                                                        |
| FCoE mapped address prefix (FC-MAP) | <p>24-bit value that identifies the FC switch and is half of the 48-bit FPMA MAC address. The FC-MAP value can be configured on the FC switch and has a default value of 0EFC00h. The FC-MAP value was originally called the Fibre Channel Organizationally Unique Identifier (FC-OUI).</p> <p>See also <i>fabric-provided MAC address (FPMA)</i>.</p>                                                                                                                                                                          |
| FCoE node (ENode)                   | <p>Fibre Channel node that has one or more lossless Ethernet MACs, each paired with an <i>FCoE Controller</i> in order to transmit FCoE frames. An ENode combines FCoE termination functions and the FC stack on a CNA. ENodes present virtual FC interfaces to FC switches or FCFs in the form of VN_Ports, which can establish FCoE virtual links with FC switch/FCF VF_Ports. ENodes perform FCoE related functions in a <i>converged network adapter (CNA)</i>.</p> <p>See also <i>converged network adapter (CNA)</i>.</p> |
| FCoE-FC gateway                     | A form of N_Port virtualizer in which the node-facing ports are FCoE ports and the FC switch-facing ports are FC ports.                                                                                                                                                                                                                                                                                                                                                                                                         |
| FCoE-FCoE gateway                   | A form of N_Port virtualizer in which the node-facing ports are FCoE ports and the FC switch-facing ports are FCoE ports.                                                                                                                                                                                                                                                                                                                                                                                                       |
| FC-FC gateway                       | A form of N_Port virtualizer in which the node-facing ports are FC ports and the FC switch-facing ports are FC ports.                                                                                                                                                                                                                                                                                                                                                                                                           |



Table 313: Fibre Channel Terms (*continued*)

| Term                                                      | Definition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCoE transit switch (also known as a FIP snooping bridge) | <p>Switch with a minimum set of features designed to support FCoE Layer 2 forwarding and FCoE security. The switch can also have optional additional features.</p> <p>Minimum feature support is:</p> <ul style="list-style-type: none"> <li>• Priority-based flow control (PFC)</li> <li>• Enhanced transmission selection (ETS)</li> <li>• Data Center Bridging Capability Exchange Protocol (DCBX), including the FCoE application TLV</li> <li>• FIP snooping (minimum support is FIP automated filter programming at the ENode edge)</li> </ul> <p>Additional FIP snooping capabilities can include learning the virtual FC connection paths (VN2VF, VN2VN, or VE2VE) and monitoring the FIP keepalive mechanisms. Other optional capabilities can also enhance FCoE within the standards. FIP snooping is typically configurable on a per-VLAN basis.</p> <p>A transit switch has an FC stack even though it is not an FC switch or an FCF.</p> |
| FCoE VLAN                                                 | VLAN dedicated to carrying only FCoE traffic. FCoE traffic must travel in a VLAN. Only FCoE interfaces should be members of an FCoE VLAN. Ethernet traffic that is not FCoE traffic must travel in a different VLAN.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Fibre Channel                                             | High-speed network technology used for storage area networks (SANs).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Fibre Channel fabric                                      | <p>Network of Fibre Channel devices that allows communication among devices, device name lookup, security, and redundancy.</p> <p>Also a local fabric on a QFX3500 switch with FCoE interfaces connected to FCoE devices on the Ethernet network and native FC interfaces connected to an FC switch in a SAN.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Fibre Channel ID (FCID)                                   | <p>24-bit value the FC switch assigns to the N_Port or VN_Port as a unique identifier within the local FC network. The FCID consists of an 8-bit domain value, an 8-bit area value, and an 8-bit port value. The FCID is sometimes called an N_Port ID.</p> <p>See also <i>N_Port ID</i>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Fibre Channel over Ethernet (FCoE)                        | <p>Standard for transporting FC frames over Ethernet networks. FCoE encapsulates Fibre Channel frames in Ethernet so that the same high-speed Ethernet physical infrastructure can transport both data and storage traffic while preserving the lossless CoS that FC requires. FCoE has its own EtherType (0x8906) to differentiate it from other Ethernet traffic.</p> <p>FCoE runs on a DCB network. FCoE servers connect to a switch that supports both FCoE and native FC protocols. This allows FCoE servers on the Ethernet network to access FC storage devices in the SAN fabric on one converged network.</p> <p>See also <i>data center bridging (DCB)</i>.</p>                                                                                                                                                                                                                                                                             |



Table 313: Fibre Channel Terms (*continued*)

| Term                        | Definition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Fibre Channel services      | Functions required for establishing FC network connectivity among devices and for managing devices on the FC network, such as login servers, domain managers, name servers, and zone servers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| FC stack                    | <p>FC or FCoE protocol capability implemented on a device to support the FC or FCoE functionality. Having an FC stack does not imply consuming a domain ID.</p> <p>Each FC or FCoE enabled server or storage device has an FC stack. Similarly, an FC or FCoE switch, an FCF, an FCoE-FC gateway, and an FCoE transit switch have FC stacks.</p>                                                                                                                                                                                                                                                                                                                                                                           |
| Fibre Channel switch        | Network switch that implements the Fibre Channel protocol.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| FIP discovery advertisement | <p>Multicast or unicast message that the FC switch (or FCF) transmits to ENodes to advertise the switch's presence on the network so that ENodes can discover the switch and request to log in to the FC fabric.</p> <p>The FC switch periodically sends multicast FIP discovery advertisements to the ALL-ENode-MACs address, a well-known address to which all ENodes listen. The multicast messages advertise the FC switch to all ENodes on the VLAN and serve as keepalive messages to maintain connectivity between the FC switch and ENodes.</p> <p>When an ENode sends a FIP discovery solicitation message to the FC switch, the FC switch responds with a unicast FIP discovery advertisement to that ENode.</p> |
| FIP discovery solicitation  | <p>Multicast or unicast message that an ENode transmits to FC switches (or FCFs) to find compatible switches in the network.</p> <p>When an ENode initializes, it sends a multicast FIP discovery solicitation to the ALL-FCF-MACs address, a well-known address to which all FC switches and FCFs listen. Compatible switches reply with a unicast FIP discovery advertisement.</p> <p>The ENode compiles a list of compatible switches, selects a switch, and logs in to that switch.</p>                                                                                                                                                                                                                                |
| FIP keepalive               | Periodic multicast FIP discovery advertisement sent from the FC switch or FCF to all ENodes to maintain connectivity.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |



Table 313: Fibre Channel Terms (*continued*)

| Term                   | Definition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FIP snooping           | <p>For VN_Port to VF_Port (VN2VF) paths (Technical Committee T11 BB-FC-5 specification), FIP snooping is a security feature enabled for FCoE VLANs on an Ethernet switch that connects ENodes to FC switches or FCFs. FIP snooping inspects data in FIP frames and uses that data to create firewall filters. The filters permit only traffic from sources that perform a successful FLOGI to the FC switch. All other traffic on the VLAN is denied. FIP snooping filters are installed on the ports in the FCoE VLAN.</p> <p>For VN_Port to VN_Port (VN2VN) paths (Technical Committee T11 BB-FC-6 specification), the FIP snooping security feature filters access between VN_Ports in a similar manner to VN2VF_Port FIP snooping.</p> <p>FIP snooping can also apply similarly to VE_Port to VE_Port (VE2VE) paths.</p> <p>FIP snooping can also snoop to provide additional visibility of FCoE Layer 2 operation.</p> <p>See also <i>FCoE node (ENode)</i>.</p> |
| FIP snooping bridge    | See <i>FCoE transit switch</i> and <i>FIP snooping</i> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| host bus adapter (HBA) | Physical mechanism that connects a host system to other FC network and storage devices. HBAs have a unique worldwide node name (WWNN) for the HBA node, which all of the ports on the HBA share, and each port on an HBA has a unique worldwide port name (WWPN).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| initiator              | System component that originates an I/O command over an I/O bus or network. An FCoE server sending a request to an FC storage device is an example of an initiator.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| iSCSI transit switch   | <p>Layer 2 Ethernet switch with a minimum set of best-practice Ethernet features to support iSCSI, along with optional enhancements. Minimum feature support is:</p> <ul style="list-style-type: none"> <li>• IEEE 802.3X asymmetric and symmetric flow control on ports not running in DCB mode</li> <li>• Priority-based flow control (PFC)</li> <li>• Enhanced transmission selection (ETS)</li> <li>• Data Center Bridging Capability Exchange Protocol (DCBX), including the iSCSI application TLV</li> </ul> <p>Other capabilities such as Internet storage name service (iSNS) are optional.</p>                                                                                                                                                                                                                                                                                                                                                               |
| interswitch link (ISL) | Link between the <i>E_Ports</i> of two FC switches in a common FC fabric. When two FCoE-based FC switches are connected together, there is a virtual ISL through Layer 2.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| logout (LOGO)          | <p>For FC devices, an N_Port logs out from the FC network by sending an FC LOGO message to the F_Port of an FC switch. The switch can also send a LOGO message to an N_Port to terminate its connection.</p> <p>For FCoE devices, a VN_Port logs out from the FC network by sending a FIP LOGO message to the VF_Port of an FC switch. The switch can also send a LOGO message to a VN_Port to terminate its connection.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |



Table 313: Fibre Channel Terms (*continued*)

| Term                            | Definition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| lossless Ethernet MAC           | <p>Full-duplex Ethernet MAC that implements Ethernet extensions to avoid Ethernet frame loss due to congestion and supports at least 2.5-KB jumbo frames. Each lossless Ethernet MAC combines with an FCoE Controller to perform FCoE termination functions on an ENode.</p> <p>See also <i>priority-based flow control (PFC)</i>, <i>quantized congestion notification (QCN)</i>, <i>FCoE controller</i>, and <i>FCoE node (ENode)</i>.</p>                                                                                                                                                                                                                                                                                                                 |
| lossless Ethernet network       | Ethernet network composed of only full-duplex links and lossless Ethernet MACs and with CoS and flow control to prevent dropping of frames.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| lossless transport              | In DCB networks, the ability to switch FCoE frames over an Ethernet network without dropping any frames. Lossless transport uses mechanisms such as priority-based flow control and quantized congestion notification to control traffic flows and avoid congestion.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| N_Port ID                       | See <i>Fibre Channel ID (FCID)</i> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| N_Port ID virtualizer           | <p>Presents itself as an FC or FCoE switch to external devices, but connects to an actual FC or FCoE switch in the other direction to provide the FC-SW services.</p> <p>An N_Port ID virtualizer logs in to the actual FC or FCoE switch in the same way as a normal node device and uses the NPIV mechanism to proxy incoming FLOGIs to FDISCs on the actual FC or FCoE switch.</p> <p>An N_Port ID virtualizer has an FC stack even though it is not an FC switch or an FCF.</p> <p>The acronym <i>NPV</i> is commonly used for N_Port ID virtualizer even though the acronym is not defined in the standards.</p>                                                                                                                                        |
| N_Port ID Virtualization (NPIV) | <p>NPIV enables a physical N_Port to acquire multiple N_Port IDs. Each N_Port ID maps to a different application (such as a virtual machine) or to a different user. This allows you to associate one F_Port with many N_Port IDs and create multiple discrete, secure virtual links over one physical point-to-point connection.</p> <p>NPIV increases resource and bandwidth utilization and allows the implementation of access control, zoning, and port security on a per-application or per-user basis.</p> <p>After an N_Port performs a FLOGI and receives its first N_Port ID, it can request more N_Port IDs by sending FDISC messages.</p> <p>See also <i>fabric login (FLOGI)</i>, <i>fabric discovery (FDISC)</i>, and <i>virtual link</i>.</p> |



Table 313: Fibre Channel Terms (*continued*)

| Term                              | Definition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| node port (N_Port)                | <p>N_Ports can be in two modes:</p> <ul style="list-style-type: none"> <li>Fabric N_Port—Node port that is an FC host or storage device end port in a point-to-point link between the device and the F_Port of an FC switch. The point-to-point link can be virtual or physical.</li> <li>Point-to-point N_Port—Node port that connects to another N_Port. The QFX3500 switch does not support this configuration.</li> </ul> <p>N_Ports handle creation, detection, and flow of messages to and from the connected devices.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| node worldwide name (NWWN)        | WWN that is unique worldwide and is assigned to an FC node. An NWWN is valid for multiple ports that are on that node (this identifies the ports as network interfaces of a particular node).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| port mode                         | <p>Role that the port plays in the FC fabric (endpoint device, FC switch connection to endpoint devices, interswitch link).</p> <p>See also <i>node port (N_Port)</i>, <i>virtual node port (VN_Port)</i>, <i>proxy node port (NP_Port)</i>, <i>fabric port (F_Port)</i>, and <i>virtual fabric port (VF_Port)</i>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| port worldwide name (PWWN)        | WWN that is unique worldwide and is assigned to an FC port.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| priority-based flow control (PFC) | <p>Link-level flow control mechanism defined by IEEE 802.1Qbb that allows independent flow control for each class of service (as defined in the 3-bit CoS field of the Ethernet header by IEEE 802.1Q tags) to ensure that no frame loss from congestion occurs in DCB networks.</p> <p>PFC is an enhancement of the Ethernet PAUSE mechanism, but PFC controls classes of flows, whereas Ethernet PAUSE indiscriminately pauses all of the traffic on a link. With PFC, a receiving device can signal a transmitting device to pause transmission based on traffic class.</p> <p>PFC provides application-specific bandwidth reservations so you can ensure that time-critical protocols and applications such as FCoE receive the priority necessary to prevent frame loss. PFC allows the same physical link to carry FCoE traffic and provide lossless service while also carrying loss-tolerant Ethernet traffic.</p> <p>See also <i>Ethernet PAUSE</i>.</p> |
| proxy gateway mode                | Connects FCoE initiators to FC switches in a converged Ethernet and Fibre Channel network and acts as an intermediary for these devices. The FCoE-FC gateway represents and acts for the FCoE initiators in transactions from the FCoE initiators destined for an FC switch, including converting FIP and FCoE frames to FC frames. The gateway represents and acts for an FC switch in transactions from the FC switch destined for an FCoE initiator, including converting FC frames to FIP frames and encapsulating FC frames in Ethernet.                                                                                                                                                                                                                                                                                                                                                                                                                     |
| proxy node port (NP_Port)         | N_Port on the QFX Series that performs proxy functions when it is configured as an FCoE-FC gateway. The NP_Port acts as a proxy for the FCoE device VN_Ports in transactions with the FC switch.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



Table 313: Fibre Channel Terms (*continued*)

| Term                                    | Definition                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| quantized congestion notification (QCN) | Mechanism defined by IEEE 802.1Qau that manages network congestion within a Layer 2 domain. When a queue reaches a configured threshold, QCN throttles traffic at the source of the congestion by transmitting messages that propagate back to the source and temporarily stop the source from transmitting. When the queue crosses the threshold that indicates the congestion has dissipated, QCN sends a message to allow the source to resume transmitting frames. |
| session                                 | Fabric login (FLOGI) or fabric discovery (FDISC) login to the FC SAN fabric. Session does not refer to end-to-end server-to-storage sessions.                                                                                                                                                                                                                                                                                                                          |
| server-provided MAC address (SPMA)      | <p>MAC address that an ENode assigns to one of its ENode MACs and is not assigned to any other ENode MAC in the same FCoE VLAN. An SPMA can be associated with more than one VN_Port at that ENode MAC.</p> <p>The QFX Series does not support SPMA.</p> <p>See also <i>ENode MAC</i> and <i>fabric-provided MAC address (FPMA)</i>.</p>                                                                                                                               |
| storage area network (SAN)              | Network whose primary purpose is the transfer of data between computer systems and storage devices. This term is most commonly used in the context of any network that supports block storage, usually iSCSI, FC, and FCoE networks.                                                                                                                                                                                                                                   |
| target                                  | System component that receives an I/O command. An FC storage device that receives a request from a server is an example of a target.                                                                                                                                                                                                                                                                                                                                   |
| VE_Port                                 | Virtual ports created to form a connection (an <i>interswitch link</i> ) between two FCoE-based FC switches as part of a common FC fabric.                                                                                                                                                                                                                                                                                                                             |
| VE2VE (VE_Port to VE_Port)              | The <i>Fibre Channel Backbone - 5 (FC-BB-5) Rev 2.00</i> specification capability of FCFs to connect to each other as a single FCoE FC SAN.                                                                                                                                                                                                                                                                                                                            |
| VN2VF (VN_Port to VF_Port)              | The <i>Fibre Channel Backbone - 5 (FC-BB-5) Rev 2.00</i> specification capability of an ENode to connect to an FCF or to an FCoE-enabled FC SAN.                                                                                                                                                                                                                                                                                                                       |
| VN2VN (VN_Port to VN_Port)              | The <i>Fibre Channel Backbone - 6 (FC-BB-6)</i> specification capability of an ENode to connect directly over Layer 2 to another ENode without the need of any FC-related services. This capability is most often used in small-scale FCoE SANs.                                                                                                                                                                                                                       |
| virtual fabric port (VF_Port)           | <p>Data-forwarding component that emulates an F_Port. A VF_Port is dynamically instantiated on successful completion of a FIP FLOGI exchange and connects to one or more VN_Ports. The term <i>virtual</i> indicates the use of a non-FC link such as an FCoE link.</p> <p>See also <i>fabric port (F_Port)</i>.</p>                                                                                                                                                   |
| virtual link                            | <p>Logical link connecting two FCoE Link End Points (LEPs) over a lossless Ethernet network, for example, the link between a VF_Port and a VN_Port. The MAC addresses of the two LEPs identifies a virtual link.</p> <p>See also <i>FCoE link end point (LEP)</i> and <i>lossless Ethernet network</i>.</p>                                                                                                                                                            |



Table 313: Fibre Channel Terms (*continued*)

| Term                        | Definition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| virtual node port (VN_Port) | <p>Data-forwarding component that emulates an N_Port. With FCoE, a VN_Port is dynamically instantiated on successful completion of a FIP FLOGI exchange and connects to one or more VF_Ports. The term <i>virtual</i> indicates the use of a non-FC link such as an FCoE link.</p> <p>VN_Port is also used for the virtual N_Ports created in both FC and FCoE when additional NPIV-based logins occur over a previously created N_Port-to-VN_Port or N_Port-to-VF_Port connection.</p> <p>See also <i>node port (N_Port)</i>.</p> |
| well-known address (WKA)    | <p>Address identifier used to access a service provided by an FC fabric. The service can be distributed in many elements throughout a fabric, or it can be centralized in one element. A WKA is always accessible, regardless of zoning. An example of a WKA is the <i>ALL-FCF-MACs</i> address to which all FCFs listen.</p>                                                                                                                                                                                                      |
| worldwide name (WWN)        | <p>64-bit identifier that is similar to a MAC address except that it is not used for forwarding. It uniquely identifies an FC device. The WWN is derived from the IEEE organizationally unique identifier (OUI) and vendor-supplied information. A WWN is unique worldwide.</p>                                                                                                                                                                                                                                                    |
| worldwide node name (WWNN)  | <p>See <i>node worldwide name (NWWN)</i>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| worldwide port name (WWPN)  | <p>See <i>port worldwide name (PWWN)</i>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

- Related Documentation**
- [Overview of Fibre Channel on the QFX Series on page 4380](#)
  - [Understanding QFabric System Terminology](#)



## CHAPTER 55

# Configuration

- [Configuration Examples on page 4495](#)
- [Configuration Tasks on page 4575](#)
- [Configuration Statements on page 4608](#)

### Configuration Examples

---

- [Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495](#)
- [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)
- [Example: Configuring CoS for FCoE Transit Switch Traffic Across an MC-LAG on page 4517](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)
- [Example: Configuring VN2VN\\_Port FIP Snooping \(FCoE Hosts Directly Connected to the Same FCoE Transit Switch\) on page 4551](#)
- [Example: Configuring VN2VN\\_Port FIP Snooping \(FCoE Hosts Directly Connected to Different FCoE Transit Switches\) on page 4555](#)
- [Example: Configuring VN2VN\\_Port FIP Snooping \(FCoE Hosts Indirectly Connected Through an Aggregation Layer FCoE Transit Switch\) on page 4563](#)
- [Example: Configuring Automated Fibre Channel Interface Load Rebalancing on page 4572](#)

### Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric

To transmit Fibre Channel (FC) traffic between FCoE devices and a storage area network (SAN) FC switch, you configure a local FC fabric on the gateway. The gateway FC fabric includes FCoE and native FC interfaces, and a VLAN to carry FCoE traffic from FCoE-capable devices. The gateway FC fabric creates the path between the FCoE devices and the SAN.

This example describes how to configure the interfaces, VLAN, and FC fabric to connect FCoE devices to the FC switch and route traffic between the VLAN and FC interfaces:

- [Requirements on page 4496](#)
- [Overview on page 4496](#)
- [Configuration on page 4499](#)
- [Verification on page 4506](#)



## Requirements

---

This example uses the following hardware and software components:

- A configured and provisioned Juniper Networks QFX3500 Switch to act as an FCoE-FC gateway
- FCoE-capable devices in an Ethernet network equipped with converged network adapters (CNAs)
- An FC switch to transmit and receive native FC traffic
- FC storage devices in the SAN
- Junos OS Release 11.1 or later for the QFX Series

## Overview

---

No interfaces are configured for FC network connectivity by default. You need to configure the FC fabric and its interfaces explicitly. Each FC fabric consists of a combination of at least one FCoE VLAN interface between the FCoE-FC gateway and the FCoE devices, and one or more native FC interfaces between the FCoE-FC gateway and the FC switch.

An FCoE VLAN interface connects the FCoE-FC gateway to FCoE devices. FCoE traffic between the devices and the FCoE-FC gateway requires a dedicated VLAN used only for FCoE traffic. You cannot mix standard Ethernet traffic and FCoE traffic on the FCoE VLAN.



**NOTE:** IGMP snooping is not supported on FCoE VLANs. Disable IGMP snooping on FCoE VLANs.

Disable storm control on all Ethernet interfaces that belong to the FCoE VLAN to prevent FCoE traffic from being dropped. Configuring storm control on an Ethernet interface and including that interface in an FCoE-FC gateway may have undesirable effects, including FCoE packet loss. After disabling storm control on all interfaces, enable storm control on any interfaces that are not part of an FCoE-FC gateway on which you want to use storm control.

When FCoE frames enter the FCoE-FC gateway, the gateway:

1. Strips the Ethernet encapsulation from the FCoE frames.
2. Sends the resulting native FC frames to the FC switch through the gateway's native FC interfaces.

Each FC interface and FCoE VLAN interface can belong to only one FC fabric. Different FC fabrics must use different native FC interfaces and different FCoE VLAN interfaces. Multiple FC fabrics on the FCoE-FC gateway can connect to the same FC switch, but they must use different FC interfaces and different FCoE VLAN interfaces.

The Ethernet interfaces that belong to the FCoE VLAN should be configured in tagged-access port mode and must include the native VLAN because FIP VLAN discovery and notification frames are exchanged as untagged packets. These Ethernet interfaces



require a maximum transmission unit (MTU) size of at least 2180 bytes to accommodate the FC payload and FCoE encapsulation. (Sometimes the MTU is rounded up to 2500 bytes. If larger frames are expected on the interface, set the MTU size accordingly.)

This example shows a simple configuration to illustrate the basic steps for creating:

- The FCoE-device-facing VLAN and its 10-Gigabit Ethernet interfaces
- The VLAN interface
- The FC-switch-facing native FC interfaces
- One FC fabric on the FCoE-FC gateway

Configuring these elements results in traffic being routed between the VLAN and FC interfaces, thus connecting the FCoE devices to the FC switch through the FCoE-FC gateway.

A VLAN called **blue** transports FCoE traffic between FCoE devices and the FCoE-FC gateway using an FCoE VLAN interface called **vlan.100**. The FCoE-FC gateway's **vlan.100** interface presents an F\_Port interface to the FCoE devices on the VLAN. For each FCoE device ENode that logs in to the FCoE-FC gateway, the gateway instantiates a virtual F\_Port (VF\_Port) interface. This creates a virtual link between the ENode VN\_Port and the FCoE-FC gateway. The FCoE-FC gateway's native FC interfaces transport FC traffic between the gateway and the FC switch.

Configuring both the FCoE VLAN interface and the native FC interfaces as part of a gateway fabric associates them in the switch and makes the connection between the FCoE servers and the FC switch.

### Topology

The topology for this example consists of one QFX3500 switch with FC-capable ports to connect to the FC switch and with Ethernet ports in tagged-access mode to connect to the FCoE devices. [Table 314 on page 4497](#) and [Figure 170 on page 4498](#) show the configuration components of this example.

**Table 314: Components of the Fibre Channel Interface Configuration Topology**


| Property                  | Settings                                                                     |
|---------------------------|------------------------------------------------------------------------------|
| Switch hardware           | QFX3500 switch in gateway mode                                               |
| FCoE VLAN name and tag ID | <b>blue</b> , tag <b>100</b><br><br>IGMP snooping disabled on the FCoE VLAN. |



Table 314: Components of the Fibre Channel Interface Configuration Topology (*continued*)

| Property                             | Settings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Interfaces in VLAN blue              | <p>Interfaces: <b>xe-0/0/6</b>, <b>xe-0/0/7</b>, <b>xe-0/0/8</b>, <b>xe-0/0/9</b>, <b>xe-0/0/10</b>, <b>xe-0/0/11</b></p> <p>Port mode: <b>tagged-access</b></p> <p>MTU: <b>2180</b></p> <p>Native VLAN: <b>1</b></p> <p><b>NOTE:</b> You can bundle two or more of the VLAN interfaces in a link aggregation group (LAG) if you wish.</p> <p><b>NOTE:</b> FCoE VLANs (any VLAN that carries FCoE traffic) support only Spanning Tree Protocol (STP) and link aggregation group (LAG) Layer 2 features.</p> <p><b>NOTE:</b> This example disables storm control on all interfaces. In your configuration, explicitly enable storm control on interfaces on which you want to use storm control. Configuring storm control on an Ethernet interface and including that interface in an FCoE-FC gateway may have undesirable effects, including FCoE packet loss.</p> |
| FCoE VLAN interface                  | <p><b>vlan.100</b></p> <p>Port mode: <b>f-port</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Native Fibre Channel interfaces      | <p>Interfaces: <b>fc-0/0/0</b>, <b>fc-0/0/1</b>, <b>fc-0/0/2</b>, <b>fc-0/0/3</b>, <b>fc-0/0/4</b>, <b>fc-0/0/5</b></p> <p>Port mode: <b>np-port</b></p> <p>Speed: <b>4 Gbps</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Fibre Channel fabric <b>fcproxy1</b> | <p>Fabric type: <b>proxy</b></p> <p>Fabric ID: <b>1</b></p> <p>FC interfaces: <b>fc-0/0/0</b>, <b>fc-0/0/1</b>, <b>fc-0/0/2</b>, <b>fc-0/0/3</b>, <b>fc-0/0/4</b>, <b>fc-0/0/5</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

Figure 170: Fibre Channel Interface Configuration Topology

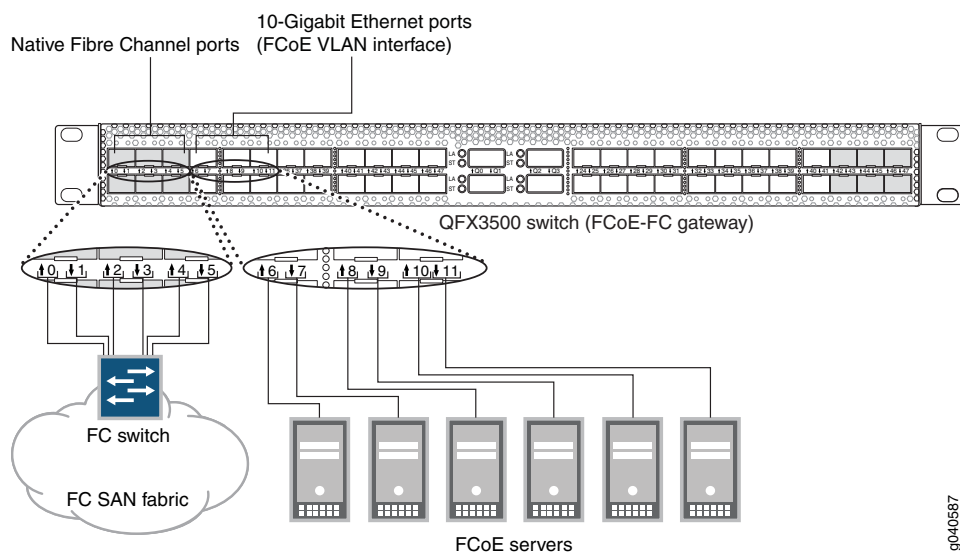

g040587



This configuration example creates a VLAN for FCoE traffic and routes its traffic to an FCoE VLAN interface that is part of the FC fabric. It also creates the FC interfaces needed to connect to the FC switch.

To set up FC interfaces and FCoE VLAN interfaces:

- Configure a VLAN to use as a dedicated FCoE VLAN:
  - Configure the interfaces the FCoE VLAN uses as Ethernet switching interfaces in tagged-access port mode.
  - Disable storm control on the interfaces.
  - Configure the interfaces the FCoE VLAN uses with the native VLAN.
  - Configure the FCoE VLAN to use the desired Ethernet interfaces.
  - Disable IGMP snooping on the FCoE VLAN. (IGMP snooping is enabled by default on all VLANs, but is not supported on FCoE VLANs).
- Configure the FCoE VLAN interface.
- Define the interface for the FCoE VLAN (associate the VLAN with the FCoE VLAN interface).
- Configure the physical FC interfaces (either one or two 6-port blocks) that connect to the FC switch.
- Configure the logical FC interfaces that connect to the FC switch.
- Configure the FCoE-FC gateway fabric:
  - Configure the fabric ID.
  - Configure the fabric as a proxy fabric.
  - Add the FCoE VLAN interface and the native FC interfaces to the fabric.

To keep the example simple, the configuration steps show six Ethernet interfaces in the FCoE VLAN and six native FC interfaces in the FC fabric. Use the same configuration procedure to add more interfaces to the FCoE VLAN or to the FC fabric.

### Configuration

#### CLI Quick Configuration

To quickly configure FCoE and native FC interfaces on an FCoE-FC gateway and route traffic between the FCoE VLAN and FC interfaces, copy the following commands and paste them into the switch terminal window:

```
[edit]
set vlans blue vlan-id 100
set vlans native vlan-id 1
set interfaces xe-0/0/6 unit 0 family ethernet-switching port-mode tagged-access vlan members blue
set interfaces xe-0/0/7 unit 0 family ethernet-switching port-mode tagged-access vlan members blue
set interfaces xe-0/0/8 unit 0 family ethernet-switching port-mode tagged-access vlan members blue
set interfaces xe-0/0/9 unit 0 family ethernet-switching port-mode tagged-access vlan members blue
```



```

set interfaces xe-0/0/10 unit 0 family ethernet-switching port-mode tagged-access vlan members
blue
set interfaces xe-0/0/11 unit 0 family ethernet-switching port-mode tagged-access vlan members
blue
set interfaces xe-0/0/6 unit 0 family ethernet-switching native-vlan-id 1
set interfaces xe-0/0/7 unit 0 family ethernet-switching native-vlan-id 1
set interfaces xe-0/0/8 unit 0 family ethernet-switching native-vlan-id 1
set interfaces xe-0/0/9 unit 0 family ethernet-switching native-vlan-id 1
set interfaces xe-0/0/10 unit 0 family ethernet-switching native-vlan-id 1
set interfaces xe-0/0/11 unit 0 family ethernet-switching native-vlan-id 1
set interfaces xe-0/0/6 mtu 2180
set interfaces xe-0/0/7 mtu 2180
set interfaces xe-0/0/8 mtu 2180
set interfaces xe-0/0/9 mtu 2180
set interfaces xe-0/0/10 mtu 2180
set interfaces xe-0/0/11 mtu 2180
delete ethernet-switching-options storm-control interface all
set vlans blue interface xe-0/0/6.0
set vlans blue interface xe-0/0/7.0
set vlans blue interface xe-0/0/8.0
set vlans blue interface xe-0/0/9.0
set vlans blue interface xe-0/0/10.0
set vlans blue interface xe-0/0/11.0
set protocols igmp-snooping vlan blue disable
set interfaces vlan unit 100 family fibre-channel port-mode f-port
set vlans blue l3-interface vlan.100
set chassis fpc 0 pic 0 fibre-channel port-range 0 5
set interfaces fc-0/0/0 unit 0 family fibre-channel port-mode np-port
set interfaces fc-0/0/1 unit 0 family fibre-channel port-mode np-port
set interfaces fc-0/0/2 unit 0 family fibre-channel port-mode np-port
set interfaces fc-0/0/3 unit 0 family fibre-channel port-mode np-port
set interfaces fc-0/0/4 unit 0 family fibre-channel port-mode np-port
set interfaces fc-0/0/5 unit 0 family fibre-channel port-mode np-port
set interfaces fc-0/0/0 fibrechannel-options speed 4g
set interfaces fc-0/0/1 fibrechannel-options speed 4g
set interfaces fc-0/0/2 fibrechannel-options speed 4g
set interfaces fc-0/0/3 fibrechannel-options speed 4g
set interfaces fc-0/0/4 fibrechannel-options speed 4g
set interfaces fc-0/0/5 fibrechannel-options speed 4g
set fc-fabrics fcproxy1 fabric-id 1
set fc-fabrics fcproxy1 fabric-type proxy
set fc-fabrics fcproxy1 interface vlan.100
set fc-fabrics fcproxy1 interface fc-0/0/0.0
set fc-fabrics fcproxy1 interface fc-0/0/1.0
set fc-fabrics fcproxy1 interface fc-0/0/2.0
set fc-fabrics fcproxy1 interface fc-0/0/3.0
set fc-fabrics fcproxy1 interface fc-0/0/4.0
set fc-fabrics fcproxy1 interface fc-0/0/5.0

```

#### Step-by-Step Procedure

Configure FCoE and FC interfaces in an FCoE-FC gateway FC fabric and set up traffic routing between the FCoE VLAN and FC interfaces:

1. Configure the VLAN for FCoE traffic:  

```
[edit vlans]
user@switch# set blue vlan-id 100
```
2. Configure the native VLAN:  

```
[edit vlans]
user@switch# set native vlan-id 1
```



3. Configure the Ethernet interfaces for the FCoE VLAN in tagged-access mode and as members of the FCoE VLAN (VLAN blue):

```
[edit interfaces]
user@switch# set xe-0/0/6 unit 0 family ethernet-switching port-mode tagged-access
vlan members blue
user@switch# set xe-0/0/7 unit 0 family ethernet-switching port-mode tagged-access
vlan members blue
user@switch# set xe-0/0/8 unit 0 family ethernet-switching port-mode tagged-access
vlan members blue
user@switch# set xe-0/0/9 unit 0 family ethernet-switching port-mode tagged-access
vlan members blue
user@switch# set xe-0/0/10 unit 0 family ethernet-switching port-mode tagged-access
vlan members blue
user@switch# set xe-0/0/11 unit 0 family ethernet-switching port-mode tagged-access
vlan members blue
```

4. Configure the native VLAN on the Ethernet interfaces in the FCoE VLAN:

```
[edit interfaces]
user@switch# set xe-0/0/6 unit 0 family ethernet-switching native-vlan-id 1
user@switch# set xe-0/0/7 unit 0 family ethernet-switching native-vlan-id 1
user@switch# set xe-0/0/8 unit 0 family ethernet-switching native-vlan-id 1
user@switch# set xe-0/0/9 unit 0 family ethernet-switching native-vlan-id 1
user@switch# set xe-0/0/10 unit 0 family ethernet-switching native-vlan-id 1
user@switch# set xe-0/0/11 unit 0 family ethernet-switching native-vlan-id 1
```

5. Set the MTU to 2180 for each Ethernet interface:

```
[edit interfaces]
user@switch# set xe-0/0/6 mtu 2180
user@switch# set xe-0/0/7 mtu 2180
user@switch# set xe-0/0/8 mtu 2180
user@switch# set xe-0/0/9 mtu 2180
user@switch# set xe-0/0/10 mtu 2180
user@switch# set xe-0/0/11 mtu 2180
```

6. Disable storm control on all interfaces (afterward, be sure to enable storm control on any interfaces on which you want to use storm control):

```
delete ethernet-switching-options storm-control interface all
```

7. Assign the Ethernet interfaces to the FCoE VLAN:

```
[edit vlans blue interface]
user@switch# set xe-0/0/6.0
user@switch# set xe-0/0/7.0
user@switch# set xe-0/0/8.0
user@switch# set xe-0/0/9.0
user@switch# set xe-0/0/10.0
user@switch# set xe-0/0/11.0
```

8. Disable IGMP snooping on the FCoE VLAN:

```
[edit protocols]
user@switch# set igmp-snooping vlan blue disable
```

9. Configure the FCoE VLAN interface and port mode for the FCoE traffic:

```
[edit interfaces]
user@switch# set vlan unit 100 family fibre-channel port-mode f-port
```

10. Define the FCoE VLAN interface as the interface for the FCoE VLAN:

```
[edit vlans]
user@switch# set blue l3-interface vlan.100
```

11. Configure the physical FC interfaces the fabric uses to connect to the FC switch:



```
[edit chassis fpc 0 pic 0]
user@switch# set fibre-channel port-range 0 5
```



**NOTE:** When you configure ports as FC ports, the port designation changes from xe-n/n/n.n format to fc-n/n/n.n format to indicate that the interface is an FC interface. FC interfaces do not support 10-Gbps interface speed but instead conform to FC interface speeds of 2 Gbps, 4 Gbps, or 8 Gbps.

12. Configure the native FC interfaces and port mode:

```
[edit interfaces]
user@switch# set fc-0/0/0 unit 0 family fibre-channel port-mode np-port
user@switch# set fc-0/0/1 unit 0 family fibre-channel port-mode np-port
user@switch# set fc-0/0/2 unit 0 family fibre-channel port-mode np-port
user@switch# set fc-0/0/3 unit 0 family fibre-channel port-mode np-port
user@switch# set fc-0/0/4 unit 0 family fibre-channel port-mode np-port
user@switch# set fc-0/0/5 unit 0 family fibre-channel port-mode np-port
```

13. Configure the native FC interface port speed:

```
[edit interfaces]
user@switch# set fc-0/0/0 fibrechannel-options speed 4g
user@switch# set fc-0/0/1 fibrechannel-options speed 4g
user@switch# set fc-0/0/2 fibrechannel-options speed 4g
user@switch# set fc-0/0/3 fibrechannel-options speed 4g
user@switch# set fc-0/0/4 fibrechannel-options speed 4g
user@switch# set fc-0/0/5 fibrechannel-options speed 4g
```

14. Configure the FC fabric name and unique ID:

```
[edit fc-fabrics]
user@switch# set fcproxy1 fabric-id 1
```

15. Define the FC fabric as an FCoE-FC gateway:

```
[edit fc-fabrics]
user@switch# set fcproxy1 fabric-type proxy
```

16. Assign the FCoE VLAN interface to the fabric:

```
[edit fc-fabrics]
user@switch# set fcproxy1 interface vlan.100
```

17. Assign the native FC interfaces to the fabric:

```
[edit fc-fabrics]
user@switch# set fcproxy1 interface fc-0/0/0.0
user@switch# set fcproxy1 interface fc-0/0/1.0
user@switch# set fcproxy1 interface fc-0/0/2.0
user@switch# set fcproxy1 interface fc-0/0/3.0
user@switch# set fcproxy1 interface fc-0/0/4.0
user@switch# set fcproxy1 interface fc-0/0/5.0
```

**Results** Display the results of the configuration:

```
user@switch> show configuration
fc-0/0/0 {
  fibrechannel-options {
    speed 4g;
  }
  unit 0 {
```



```

        family fibre-channel {
            port-mode np-port;
        }
    }
}
fc-0/0/1 {
    fibrechannel-options {
        speed 4g;
    }
    unit 0 {
        family fibre-channel {
            port-mode np-port;
        }
    }
}
fc-0/0/2 {
    fibrechannel-options {
        speed 4g;
    }
    unit 0 {
        family fibre-channel {
            port-mode np-port;
        }
    }
}
fc-0/0/3 {
    fibrechannel-options {
        speed 4g;
    }
    unit 0 {
        family fibre-channel {
            port-mode np-port;
        }
    }
}
fc-0/0/4 {
    fibrechannel-options {
        speed 4g;
    }
    unit 0 {
        family fibre-channel {
            port-mode np-port;
        }
    }
}
fc-0/0/5 {
    fibrechannel-options {
        speed 4g;
    }
    unit 0 {
        family fibre-channel {
            port-mode np-port;
        }
    }
}
xe-0/0/6 {

```



```
mtu 2180;
unit 0 {
    family ethernet-switching {
        port-mode tagged-access;
        vlan {
            members blue;
        }
        native-vlan-id 1;
    }
}
xe-0/0/7 {
    mtu 2180;
    unit 0 {
        family ethernet-switching {
            port-mode tagged-access;
            vlan {
                members blue;
            }
            native-vlan-id 1;
        }
    }
}
xe-0/0/8 {
    mtu 2180;
    unit 0 {
        family ethernet-switching {
            port-mode tagged-access;
            vlan {
                members blue;
            }
            native-vlan-id 1;
        }
    }
}
xe-0/0/9 {
    mtu 2180;
    unit 0 {
        family ethernet-switching {
            port-mode tagged-access;
            vlan {
                members blue;
            }
            native-vlan-id 1;
        }
    }
}
xe-0/0/10 {
    mtu 2180;
    unit 0 {
        family ethernet-switching {
            port-mode tagged-access;
            vlan {
                members blue;
            }
            native-vlan-id 1;
        }
    }
}
```



```

    }
  }
}
xe-0/0/11 {
  mtu 2180;
  unit 0 {
    family ethernet-switching {
      port-mode tagged-access;
      vlan {
        members blue;
      }
      native-vlan-id 1;
    }
  }
}
vlan {
  unit 100 {
    family fibre-channel {
      port-mode f-port;
    }
  }
}
fc-fabrics {
  fcproxy1 {
    fabric-id 1
    fabric-type proxy
    interface {
      vlan.100
      fc-0/0/0.0;
      fc-0/0/1.0;
      fc-0/0/2.0;
      fc-0/0/3.0;
      fc-0/0/4.0;
      fc-0/0/5.0;
    }
  }
}
protocols {
  igmp-snooping {
    vlan blue {
      disable;
    }
  }
}
vlangs {
  blue {
    vlan-id 100
    interface {
      xe-0/0/6.0;
      xe-0/0/7.0;
      xe-0/0/8.0;
      xe-0/0/9.0;
      xe-0/0/10.0;
      xe-0/0/11.0;
    }
  }
  l3-interface vlan.100
}

```



```

}
native {
  vlan-id 1;
}
}

```



**TIP:** To quickly configure the interfaces, issue the `load merge terminal` command and then copy the hierarchy and paste it into the switch terminal window.

## Verification

To verify that the native FC interfaces and FCoE VLAN interface have been created, added to the FC fabric, and are operating properly, perform these tasks:

- [Verifying That the Native FC Interfaces and the FCoE VLAN Interface Have Been Created on page 4506](#)
- [Verifying That the FCoE VLAN Includes the Correct Ethernet Interfaces on page 4507](#)
- [Verifying That the FC Fabric Includes the Correct Interfaces on page 4507](#)
- [Verifying Native FC Interface Operation on page 4508](#)
- [Verifying That IGMP Snooping Has Been Disabled on the FCoE VLAN on page 4508](#)

### *Verifying That the Native FC Interfaces and the FCoE VLAN Interface Have Been Created*

**Purpose** Verify that the six native FC interfaces and the FCoE VLAN interface have been created on the switch and are configured in the correct mode.

**Action** List all of the FC interfaces configured on the switch using the `show fibre-channel interfaces` command:

```
user@switch> show fibre-channel interfaces
```

| Interface  | Idx | Type | Native    |      | Config Mode | Oper Mode | State |
|------------|-----|------|-----------|------|-------------|-----------|-------|
|            |     |      | Fabric-id | NPIV |             |           |       |
| fc-0/0/0.0 | 70  | FC   | 1         | YES  | NP          | NP        | up    |
| fc-0/0/1.0 | 71  | FC   | 1         | YES  | NP          | NP        | up    |
| fc-0/0/2.0 | 72  | FC   | 1         | YES  | NP          | NP        | up    |
| fc-0/0/3.0 | 73  | FC   | 1         | YES  | NP          | NP        | up    |
| fc-0/0/4.0 | 74  | FC   | 1         | YES  | NP          | NP        | up    |
| fc-0/0/5.0 | 75  | FC   | 1         | YES  | NP          | NP        | up    |
| vlan.100   | 67  | FCOE | 1         | YES  | F           | F         | up    |

**Meaning** The `show fibre-channel interfaces` command lists all native FC interfaces and FCoE VLAN interfaces configured on the switch. The command output shows that the FC interfaces `fc-0/0/0.0`, `fc-0/0/1.0`, `fc-0/0/2.0`, `fc-0/0/3.0`, `fc-0/0/4.0`, and `fc-0/0/5.0` have been created and that those six interfaces:

- Are native Fibre Channel interfaces (type FC).
- Belong to the FC fabric with a configured fabric ID of 1.
- Are capable of N\_Port ID virtualization (NPIV).



- Have a configured mode and an operational mode of proxy N\_Port (**NP**), which means that they should be connected to an FCF or an FC switch, not to an FCoE device, and that they carry native FC traffic.
- Show an operational state of **up**.

The command output also shows that the FCoE VLAN interface **vlan.100** has been created and that interface:

- Is an FCoE VLAN interface (type **FCOE**).
- Belongs to the FC fabric with a configured fabric ID of 1.
- Is capable of N\_Port ID virtualization (NPIV).
- Has a configured mode and an operational mode of F\_Port (**F**), which means that its interfaces connect to FCoE devices and carry FCoE traffic.
- Shows an operational state of **up**.

#### *Verifying That the FCoE VLAN Includes the Correct Ethernet Interfaces*

**Purpose** Verify that the FCoE VLAN **blue** has been created with the correct VLAN tag (**100**) and with the correct Ethernet interfaces.

**Action** List all of the interfaces configured on the switch in VLAN **blue** using the **show vlans** command:

```
user@switch> show vlans blue
Name      Tag      Interfaces
blue      100
          xe-0/0/6.0, xe-0/0/7.0, xe-0/0/8.0, xe-0/0/9.0, xe-0/0/10.0
          xe-0/0/11.0
```

**Meaning** The **show vlans blue** command lists the interfaces that are members of the FCoE VLAN **blue**. The command output shows that the **blue** VLAN has a tag ID of 100 and includes the interfaces **xe-0/0/6.0**, **xe-0/0/7.0**, **xe-0/0/8.0**, **xe-0/0/9.0**, **xe-0/0/10.0**, and **xe-0/0/11.0**.

#### *Verifying That the FC Fabric Includes the Correct Interfaces*

**Purpose** Verify that the FC fabric configuration is configured on the switch with the correct native FC and FCoE VLAN interfaces.

**Action** List all of the interfaces configured on FC fabrics on the switch using the **show fibre-channel fabric** command:

```
user@switch> show fibre-channel fabric
Name      Fabric-id  Type      Interfaces
fcproxy1  1          PROXY
          fc-0/0/0.0
          fc-0/0/1.0
          fc-0/0/2.0
          fc-0/0/3.0
          fc-0/0/4.0
```



```
fc-0/0/5.0
vlan.100
```

**Meaning** The **show fibre-channel fabric** command lists the interfaces that are members of each FC fabric. The command output shows that the only fabric configured on the switch is named **fcproxy1**, has a fabric-id of 1, and is a **proxy** fabric in an FCoE-FC gateway. The command output also shows that the native FC interfaces **fc-0/0/0.0**, **fc-0/0/1.0**, **fc-0/0/2.0**, **fc-0/0/3.0**, **fc-0/0/4.0**, and **fc-0/0/5.0**, and the FCoE VLAN interface **vlan.100** belong to **fcproxy1**.

#### *Verifying Native FC Interface Operation*

**Purpose** Verify that the native FC interfaces are online and display the number of FC sessions on each interface.

**Action** List all of the native FC NP\_Port interface states and sessions by FC fabric using the **show fibre-channel proxy np-port** command:

```
user@switch> show fibre-channel proxy np-port
Fabric: fcproxy1, Fabric-id: 1
```

| NP-Port    | State  | Sessions | LB state | LB weight |
|------------|--------|----------|----------|-----------|
| fc-0/0/0.0 | online | 3        | ON       | 4         |
| fc-0/0/1.0 | online | 3        | ON       | 4         |
| fc-0/0/2.0 | online | 2        | ON       | 4         |
| fc-0/0/3.0 | online | 2        | ON       | 4         |
| fc-0/0/4.0 | online | 2        | ON       | 4         |
| fc-0/0/5.0 | online | 2        | ON       | 4         |

**Meaning** The **show fibre-channel proxy np-port** command lists the interfaces that are configured as native FC proxy N\_Port interfaces. The command output shows:

- The fabric name is **fcproxy1** and its fabric ID is 1.
- The interfaces are **online**.
- The number of FC sessions (virtual links) running on each interface.
- The load-balancing (LB) state is **ON** for all of the interfaces.
- The LB weight reflects the port speed of each interface, which is 4 Gbps.

#### *Verifying That IGMP Snooping Has Been Disabled on the FCoE VLAN*

**Purpose** Verify that IGMP snooping is disabled on the FCoE VLAN.

**Action** List the IGMP snooping protocol information for the FCoE VLAN using the **show configuration protocols igmp-snooping vlan blue** command:

```
user@switch> show configuration protocols igmp-snooping vlan blue
disable;
```

**Meaning** The **show configuration protocols igmp-snooping vlan blue** command lists the IGMP snooping configuration for the FCoE VLAN. The command output shows that IGMP snooping is disabled on the FCoE VLAN.



**Related Documentation**

- [Configuring a Fibre Channel Interface on page 4579](#)
- [Configuring an FCoE VLAN Interface on page 4582](#)
- [Disabling Storm Control on FCoE Interfaces on an FCoE-FC Gateway on page 4586](#)
- [Assigning Interfaces to a Fibre Channel Fabric on page 4584](#)
- [Configuring an FCoE-FC Gateway Fibre Channel Fabric on page 4576](#)
- [Configuring FIP on an FCoE-FC Gateway on page 4589](#)
- [Disabling VN2VF\\_Port FIP Snooping on an FCoE-FC Gateway Switch Interface on page 4598](#)
- [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)

**Example: Configuring CoS PFC for FCoE Traffic**

Priority-based flow control (PFC, described in IEEE 802.1Qbb) is a link-level flow control mechanism that you apply at ingress interfaces. PFC enables you to divide traffic on one physical link into eight priorities. You can think of the eight priorities as eight “lanes” of traffic that correspond to queues (forwarding classes). Each priority is mapped to a 3-bit IEEE 802.1p CoS flag in the VLAN header.

You can selectively apply PFC to the traffic in any queue without pausing the traffic in other queues on the same link. You must apply PFC to FCoE traffic to ensure lossless transport.

To configure PFC on FCoE traffic, use the default FCoE forwarding-class-to-queue mapping and:

- Configure a classifier that associates the FCoE forwarding class with FCoE traffic.
- Configure a congestion notification profile to apply PFC to the FCoE traffic.
- Apply the classifier and the PFC configuration to ingress interfaces.
- Configure the bandwidth scheduling for the FCoE forwarding class output queue.
- Create a forwarding class set (priority group) that includes the FCoE forwarding class; this is required to configure enhanced transmission selection (ETS) and support data center bridging (DCB).
- Configure the bandwidth scheduling for the FCoE priority group.
- Apply the scheduling to the egress interfaces.





**NOTE:** If you are using Junos OS Release 12.2 or later, use the default forwarding classes for the lossless fcoe forwarding class. If you explicitly configure default lossless forwarding classes, the traffic mapped to those forwarding classes is treated as lossy (best-effort) traffic and does *not* receive lossless treatment.

In Junos OS Release 12.3 and later, you can include the *no-loss* packet drop attribute in explicit forwarding class configurations to configure a lossless forwarding class.

This example describes how to configure PFC for FCoE traffic:

- [Requirements on page 4510](#)
- [Overview on page 4510](#)
- [Configuration on page 4511](#)
- [Verification on page 4515](#)

### Requirements

This example uses the following hardware and software components:

- A Juniper Networks QFX3500 Switch
- Junos OS Release 11.1 or later for the QFX Series

### Overview

FCoE traffic requires PFC to ensure lossless packet transport. This example shows you how to:

- Assign FCoE traffic to the FCoE priority at the ingress.
- Create and apply CoS for the FCoE traffic using ETS (hierarchical port scheduling).
- Apply PFC to the FCoE traffic.
- Apply the configuration to ingress and egress interfaces.

Each interface in this example is configured as both an ingress interface and an egress interface, so the classifier, congestion notification profile, and port scheduling are applied to all of the interfaces.

### Topology

[Table 315 on page 4510](#) shows the configuration components for this example.

**Table 315: Components of the PFC for FCoE Traffic Configuration Topology**

| Component | Settings       |
|-----------|----------------|
| Hardware  | QFX3500 switch |

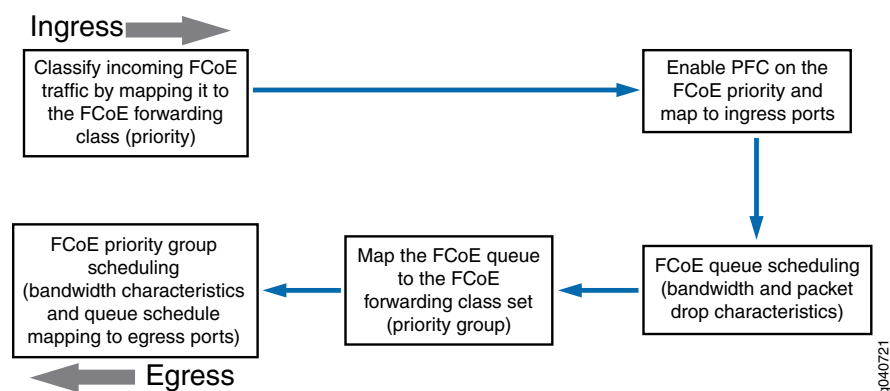


Table 315: Components of the PFC for FCoE Traffic Configuration Topology (*continued*)

| Component                                                                                                   | Settings                                                                                                                                                    |
|-------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Behavior aggregate classifier (maps the FCoE forwarding class to incoming packets by IEEE 802.1 code point) | Code point <b>011</b> to forwarding class <b>fcoe</b> and loss priority <b>low</b><br>Ingress interfaces: <b>xe-0/0/31, xe-0/0/32, xe-0/0/33, xe-0/0/34</b> |
| PFC congestion notification profile                                                                         | <b>fcoe-cnp:</b><br>Code point <b>011</b><br>Ingress interfaces: <b>xe-0/0/31, xe-0/0/32, xe-0/0/33, xe-0/0/34</b>                                          |
| FCoE queue scheduler                                                                                        | <b>fcoe-sched:</b><br>Minimum bandwidth <b>3g</b><br>Maximum bandwidth <b>100%</b><br>Priority <b>low</b>                                                   |
| Forwarding class-to-scheduler mapping                                                                       | Scheduler map <b>fcoe-map:</b><br>Forwarding class <b>fcoe</b><br>Scheduler <b>fcoe-sched</b>                                                               |
| Forwarding class set (FCoE priority group)                                                                  | <b>fcoe-pg:</b><br>Forwarding class <b>fcoe</b><br>Egress interfaces: <b>xe-0/0/31, xe-0/0/32, xe-0/0/33, xe-0/0/34</b>                                     |
| Traffic control profile                                                                                     | <b>fcoe-tcp:</b><br>Scheduler map <b>fcoe-map</b><br>Minimum bandwidth <b>3g</b><br>Maximum bandwidth <b>100%</b>                                           |

Figure 171 on page 4511 shows a block diagram of the configuration components and the configuration flow of the CLI statements used in the example.

Figure 171: PFC for FCoE Traffic Configuration Components Block Diagram



### Configuration

#### CLI Quick Configuration

To quickly configure PFC for FCoE traffic, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network



configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level:

```
[edit class-of-service]
set classifiers ieee-802.1 fcoe-classifier forwarding-class fcoe loss-priority low code-points 011
set congestion-notification-profile fcoe-cnp input ieee-802.1 code-point 011 pfc
set interfaces xe-0/0/31 unit 0 classifiers ieee-802.1 fcoe-classifier
set interfaces xe-0/0/32 unit 0 classifiers ieee-802.1 fcoe-classifier
set interfaces xe-0/0/33 unit 0 classifiers ieee-802.1 fcoe-classifier
set interfaces xe-0/0/34 unit 0 classifiers ieee-802.1 fcoe-classifier
set interfaces xe-0/0/31 congestion-notification-profile fcoe-cnp
set interfaces xe-0/0/32 congestion-notification-profile fcoe-cnp
set interfaces xe-0/0/33 congestion-notification-profile fcoe-cnp
set interfaces xe-0/0/34 congestion-notification-profile fcoe-cnp
set schedulers fcoe-sched priority low transmit-rate 3g
set schedulers fcoe-sched shaping-rate percent 100
set scheduler-maps fcoe-map forwarding-class fcoe scheduler fcoe-sched
set forwarding-class-sets fcoe-pg class fcoe
set traffic-control-profiles fcoe-tcp scheduler-map fcoe-map guaranteed-rate 3g
set traffic-control-profiles fcoe-tcp shaping-rate percent 100
set interfaces xe-0/0/31 forwarding-class-set fcoe-pg output-traffic-control-profile fcoe-tcp
set interfaces xe-0/0/32 forwarding-class-set fcoe-pg output-traffic-control-profile fcoe-tcp
set interfaces xe-0/0/33 forwarding-class-set fcoe-pg output-traffic-control-profile fcoe-tcp
set interfaces xe-0/0/34 forwarding-class-set fcoe-pg output-traffic-control-profile fcoe-tcp
```

#### Step-by-Step Procedure

To configure the FCoE forwarding class (priority), ingress classifier, output queue scheduling, forwarding class set (priority group) and its output port scheduling, PFC application, and interfaces to set up PFC for FCoE traffic:

1. Configure a classifier to set the loss priority and IEEE 802.1 code point assigned to the FCoE forwarding class at the ingress:

```
[edit class-of-service]
user@switch# set classifiers ieee-802.1 fcoe-classifier forwarding-class fcoe loss-priority
low code-points 011
```

2. Configure PFC on the FCoE queue by applying FCoE to the IEEE 802.1 code point 011:

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe-cnp input ieee-802.1 code-point
011 pfc
```

3. Apply the PFC configuration to the ingress interfaces:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/31 congestion-notification-profile fcoe-cnp
user@switch# set interfaces xe-0/0/32 congestion-notification-profile fcoe-cnp
user@switch# set interfaces xe-0/0/33 congestion-notification-profile fcoe-cnp
user@switch# set interfaces xe-0/0/34 congestion-notification-profile fcoe-cnp
```

4. Assign the classifier to the ingress interfaces:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/31 unit 0 classifiers ieee-802.1 fcoe-classifier
user@switch# set interfaces xe-0/0/32 unit 0 classifiers ieee-802.1 fcoe-classifier
user@switch# set interfaces xe-0/0/33 unit 0 classifiers ieee-802.1 fcoe-classifier
user@switch# set interfaces xe-0/0/34 unit 0 classifiers ieee-802.1 fcoe-classifier
```

5. Configure output scheduling for the FCoE queue:

```
[edit class-of-service]
user@switch# set schedulers fcoe-sched priority low transmit-rate 3g
user@switch# set schedulers fcoe-sched shaping-rate percent 100
```



6. Map the FCoE forwarding class to the FCoE scheduler:
 

```
[edit class-of-service]
user@switch# set scheduler-maps fcoe-map forwarding-class fcoe scheduler fcoe-sched
```
7. Configure the forwarding class set for the FCoE traffic:
 

```
[edit class-of-service]
user@switch# set forwarding-class-sets fcoe-pg class fcoe
```
8. Define the traffic control profile for the FCoE forwarding class set:
 

```
[edit class-of-service]
user@switch# set traffic-control-profiles fcoe-tcp scheduler-map fcoe-map
guaranteed-rate 3g
user@switch# set traffic-control-profiles fcoe-tcp shaping-rate percent 100
```
9. Apply the FCoE forwarding class set and traffic control profile to the egress ports:
 

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/31 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
user@switch# set interfaces xe-0/0/32 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
user@switch# set interfaces xe-0/0/33 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
user@switch# set interfaces xe-0/0/34 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
```

### Results

Display the results of the configuration (the system shows only the explicitly configured parameters; it does not show default parameters such as the **fcoe** lossless forwarding class):

```
user@switch> show configuration class-of-service
classifiers {
  ieee-802.1 fcoe-classifier {
    forwarding-class fcoe {
      loss-priority low code-points 011;
    }
  }
}
traffic-control-profiles {
  fcoe-tcp {
    scheduler-map fcoe-map;
    shaping-rate percent 100;
    guaranteed-rate 30000000000;
  }
}
forwarding-class-sets {
  fcoe-pg {
    class fcoe;
  }
}
congestion-notification-profile {
  fcoe-cnp {
    input {
      ieee-802.1 {
        code-point 011 {
          pfc;
        }
      }
    }
  }
}
```



```
    }
  }
}
interfaces {
  xe-0/0/31 {
    congestion-notification-profile fcoe-cnp;
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    unit 0 {
      classifiers {
        ieee-802.1 fcoe-classifier;
      }
    }
  }
  xe-0/0/32 {
    congestion-notification-profile fcoe-cnp;
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    unit 0 {
      classifiers {
        ieee-802.1 fcoe-classifier;
      }
    }
  }
  xe-0/0/33 {
    congestion-notification-profile fcoe-cnp;
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    unit 0 {
      classifiers {
        ieee-802.1 fcoe-classifier;
      }
    }
  }
  xe-0/0/34 {
    congestion-notification-profile fcoe-cnp;
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    unit 0 {
      classifiers {
        ieee-802.1 fcoe-classifier;
      }
    }
  }
}
```



```

    }
  }
  scheduler-maps {
    fcoe-map {
      forwarding-class fcoe scheduler fcoe-sched;
    }
  }
  schedulers {
    fcoe-sched {
      transmit-rate 3000000000;
      shaping-rate percent 100;
      priority low;
    }
  }
}

```



**TIP:** To quickly configure the interfaces, issue the load merge terminal command and then copy the hierarchy and paste it into the switch terminal window.

## Verification

To verify that the PFC configuration for FCoE traffic components has been created and is operating properly, perform these tasks:

- [Verifying That Priority-Based Flow Control Has Been Enabled on page 4515](#)
- [Verifying the Ingress Interface PFC Configuration on page 4516](#)

### *Verifying That Priority-Based Flow Control Has Been Enabled*

**Purpose** Verify that PFC is enabled on the FCoE queue to enable lossless transport.

**Action** List the congestion notification profiles using the operational mode command **show class-of-service congestion-notification**:

```
user@switch> show class-of-service congestion-notification
```

```
Type: Input, Name: fcoe-cnp, Index: 51697
```

```
Cable Length: 100 m
```

| Priority | PFC      | MRU  |
|----------|----------|------|
| 000      | Disabled |      |
| 001      | Disabled |      |
| 010      | Disabled |      |
| 011      | Enabled  | 2500 |
| 100      | Disabled |      |
| 101      | Disabled |      |
| 110      | Disabled |      |
| 111      | Disabled |      |

```
Type: Output
```

| Priority | Flow-Control-Queues |
|----------|---------------------|
| 000      | 0                   |
| 001      | 1                   |
| 010      | 2                   |



|     |   |
|-----|---|
| 011 | 3 |
| 100 | 4 |
| 101 | 5 |
| 110 | 6 |
| 111 | 7 |

**Meaning** The **show class-of-service congestion-notification** operational command lists all of the congestion notification profiles and which IEEE 802.1p code points have PFC enabled. The command output shows that PFC is enabled on code point 011 for the **fcoe-cnp** congestion notification profile.

The command also shows the default cable length (100 meters), the default maximum receive unit (2500 bytes), and the default mapping of priorities to output queues because this example does not include configuring these options.

#### *Verifying the Ingress Interface PFC Configuration*

**Purpose** Verify that the classifier **fcoe-classifier** and the congestion notification profile **fcoe-cnp** are configured on ingress interfaces **xe-0/0/31**, **xe-0/0/32**, **xe-0/0/33**, and **xe-0/0/34**.

**Action** List the ingress interfaces using the operational mode command **show configuration class-of-service interfaces**:

```
user@switch> show configuration class-of-service interfaces xe-0/0/31
congestion-notification-profile fcoe-cnp;
unit 0 {
    classifiers {
        ieee-802.1 fcoe-classifier;
    }
}

user@switch> show configuration class-of-service interfaces xe-0/0/32
congestion-notification-profile fcoe-cnp;
unit 0 {
    classifiers {
        ieee-802.1 fcoe-classifier;
    }
}

user@switch> show configuration class-of-service interfaces xe-0/0/33
congestion-notification-profile fcoe-cnp;
unit 0 {
    classifiers {
        ieee-802.1 fcoe-classifier;
    }
}

user@switch> show configuration class-of-service interfaces xe-0/0/34
congestion-notification-profile fcoe-cnp;
unit 0 {
    classifiers {
        ieee-802.1 fcoe-classifier;
```



```
    }
}
```

**Meaning** The **show configuration class-of-service interfaces** commands list the congestion notification profile that is mapped to the interface (**fcoe-cnp**) and the IEEE 802.1p classifier associated with the interface (**fcoe-classifier**).

- Related Documentation**
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
  - [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
  - [Overview of CoS Changes Introduced in Junos OS Release 12.2 on page 4820](#)
  - [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)

### Example: Configuring CoS for FCoE Transit Switch Traffic Across an MC-LAG

Multichassis link aggregation groups (MC-LAGs) provide redundancy and load balancing between two QFX3500 switches, multihoming support for client devices such as servers, and a loop-free Layer 2 network without running Spanning Tree protocol (STP).

You can use an MC-LAG to provide a redundant aggregation layer for Fiber Channel over Ethernet (FCoE) traffic in an *inverted-U* topology. To support lossless transport of FCoE traffic across an MC-LAG, you must configure the appropriate class of service (CoS) on both of the QFX3500 switches with MC-LAG port members. The CoS configuration must be the same on both of the MC-LAG switches because an MC-LAG does not carry forwarding class and IEEE 802.1p priority information.



**NOTE:** This example describes how to configure CoS to provide lossless transport for FCoE traffic across an MC-LAG that connects two QFX3500 switches. It also describes how to configure CoS on the FCoE transit switches that connect FCoE hosts to the QFX3500 switches that form the MC-LAG.

This example does *not* describe how to configure the MC-LAG itself. For a detailed example of MC-LAG configuration, see [“Example: Configuring Multichassis Link Aggregation” on page 1958](#). However, this example includes a subset of MC-LAG configuration that only shows how to configure interface membership in the MC-LAG.

Ports that are part of an FCoE-FC gateway configuration (a virtual FCoE-FC gateway fabric) do not support MC-LAGs. Ports that are members of an MC-LAG act as FCoE passthrough transit switch ports.

QFX3500 Node devices support MC-LAGs. QFabric system Node devices do not support MC-LAGs.

This topic describes:

- [Requirements on page 4518](#)
- [Overview on page 4518](#)



- [Configuration on page 4523](#)
- [Verification on page 4531](#)

---

## Requirements

This example uses the following hardware and software components:

- Two Juniper Networks QFX3500 Switches that form an MC-LAG for FCoE traffic.
- Two Juniper Networks QFX3500 Switches that provide FCoE server access in transit switch mode, and connect to the MC-LAG switches. These switches can be standalone QFX3500 switches or they can be Node devices in a QFabric system.
- FCoE servers (or other FCoE hosts) connected to the transit switches.
- Junos OS Release 12.2 or later for the QFX Series.

---

## Overview

FCoE traffic requires lossless transport. This example shows you how to:

- Configure CoS for FCoE traffic on the two QFX3500 switches that form the MC-LAG, including priority-based flow control (PFC) and enhanced transmission selection (ETS; hierarchical scheduling of resources for the FCoE forwarding class priority and for the forwarding class set priority group).
- Configure CoS for FCoE on the two FCoE transit switches that connect FCoE hosts to the MC-LAG switches and enable FIP snooping on the FCoE VLAN at the FCoE transit switch access ports.
- Disable IGMP snooping on the FCoE VLAN.
- Configure the appropriate port mode, MTU, and FCoE trusted or untrusted state for each interface to support lossless FCoE transport.

This example does not show how to configure the MC-LAG itself. This example does include a subset of MC-LAG configuration that only shows how to configure interface membership in the MC-LAG.

### **Topology**

QFX3500 switches that act as transit switches support MC-LAGs for FCoE traffic in an inverted-U network topology, as shown in [Figure 172 on page 4519](#):



Figure 172: Supported Topology for an MC-LAG on an FCoE Transit Switch

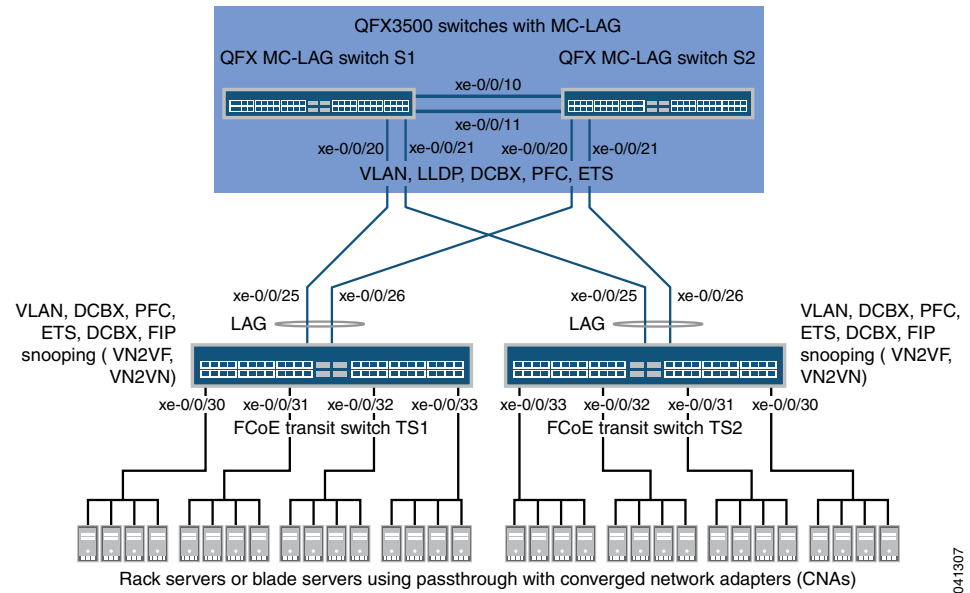


Table 316 on page 4519 shows the configuration components for this example.

Table 316: Components of the CoS for FCoE Traffic Across an MC-LAG Configuration Topology

| Component                                                                  | Settings                                                                                                                |
|----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Hardware                                                                   | Four QFX3500 switches (two to form the MC-LAG as passthrough transit switches and two transit switches for FCoE access) |
| Forwarding class (all switches)                                            | Default <b>fc</b> forwarding class.                                                                                     |
| Classifier (forwarding class mapping of incoming traffic to IEEE priority) | Default IEEE 802.1p trusted classifier on all FCoE interfaces.                                                          |



Table 316: Components of the CoS for FCoE Traffic Across an MC-LAG Configuration Topology (*continued*)

| Component                                                | Settings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LAGs and MC-LAG                                          | <p>S1—Ports xe-0/0/10 and x-0/0/11 are members of LAG <b>ae0</b>, which connects Switch S1 to Switch S2. Ports xe-0/0/20 and xe-0/0/21 are members of MC-LAG <b>ae1</b>. All ports are configured in <b>trunk</b> port mode, as <b>fcoe-trusted</b>, and with an MTU of <b>2180</b>.</p> <p>S2—Ports xe-0/0/10 and x-0/0/11 are members of LAG <b>ae0</b>, which connects Switch S2 to Switch S1. Ports xe-0/0/20 and xe-0/0/21 are members of MC-LAG <b>ae1</b>. All ports are configured in <b>trunk</b> port mode, as <b>fcoe-trusted</b>, and with an MTU of <b>2180</b>.</p> <p><b>NOTE:</b> Ports xe-0/0/20 and xe-0/0/21 on Switches S1 and S2 are the members of the MC-LAG.</p> <p>TS1—Ports xe-0/0/25 and x-0/0/26 are members of LAG <b>ae1</b>, configured in <b>trunk</b> port mode, as <b>fcoe-trusted</b>, and with an MTU of <b>2180</b>. Ports xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33 are configured in <b>tagged-access</b> port mode, with an MTU of <b>2180</b>.</p> <p>TS2—Ports xe-0/0/25 and x-0/0/26 are members of LAG <b>ae1</b>, configured in <b>trunk</b> port mode, as <b>fcoe-trusted</b>, and with an MTU of <b>2180</b>. Ports xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33 are configured in <b>tagged-access</b> port mode, with an MTU of <b>2180</b>.</p> |
| FCoE queue scheduler (all switches)                      | <b>fcoe-sched:</b><br>Minimum bandwidth <b>3g</b><br>Maximum bandwidth <b>100%</b><br>Priority <b>low</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Forwarding class-to-scheduler mapping (all switches)     | Scheduler map <b>fcoe-map</b> :<br>Forwarding class <b>fcoe</b><br>Scheduler <b>fcoe-sched</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Forwarding class set (FCoE priority group, all switches) | <b>fcoe-pg:</b><br>Forwarding class <b>fcoe</b><br><br>Egress interfaces: <ul style="list-style-type: none"> <li>• S1—LAG <b>ae0</b> and MC-LAG <b>ae1</b></li> <li>• S2—LAG <b>ae0</b> and MC-LAG <b>ae1</b></li> <li>• TS1—LAG <b>ae1</b>, interfaces <b>xe-0/0/30</b>, <b>xe-0/0/31</b>, <b>xe-0/0/32</b>, and <b>xe-0/0/33</b></li> <li>• TS2—LAG <b>ae1</b>, interfaces <b>xe-0/0/30</b>, <b>xe-0/0/31</b>, <b>xe-0/0/32</b>, and <b>xe-0/0/33</b></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Traffic control profile (all switches)                   | <b>fcoe-tcp:</b><br>Scheduler map <b>fcoe-map</b><br>Minimum bandwidth <b>3g</b><br>Maximum bandwidth <b>100%</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |



**Table 316: Components of the CoS for FCoE Traffic Across an MC-LAG Configuration Topology (continued)**

| Component                                          | Settings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PFC congestion notification profile (all switches) | <p><b>fcoe-cnp:</b><br/>Code point 011</p> <p>Ingress interfaces:</p> <ul style="list-style-type: none"> <li>• S1—LAG ae0 and MC-LAG ae1</li> <li>• S2—LAG ae0 and MC-LAG ae1</li> <li>• TS1—LAG ae1, interfaces xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33</li> <li>• TS2—LAG ae1, interfaces xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33</li> </ul>                                                                                                                                                                   |
| FCoE VLAN name and tag ID                          | <p>Name—<b>fcoe_vlan</b><br/>ID—100</p> <p>Include the FCoE VLAN on the interfaces that carry FCoE traffic on all four switches.</p> <p>Disable IGMP snooping on the FCoE VLAN on all four switches.</p>                                                                                                                                                                                                                                                                                                                       |
| FIP snooping                                       | <p>Enable FIP snooping on Transit Switches TS1 and TS2 on the FCoE VLAN. Configure the LAG interfaces that connect to the MC-LAG switches as FCoE trusted interfaces so that they do not perform FIP snooping.</p> <p>This example enables VN2VN_Port FIP snooping on the FCoE transit switch interfaces connected to the FCoE servers. The example is equally valid with VN2VF_Port FIP snooping enabled on the transit switch access ports. The method of FIP snooping you enable depends on your network configuration.</p> |



**NOTE:** This example uses the default IEEE 802.1p trusted BA classifier, which is automatically applied to trunk mode and tagged access mode ports if you do not apply an explicitly configured classifier.



To configure CoS for FCoE traffic across an MC-LAG:

- Use the default FCoE forwarding class and forwarding-class-to-queue mapping (do not explicitly configure the FCoE forwarding class or output queue). The default FCoE forwarding class is **fcoe**, and the default output queue is **queue 3**.



**NOTE:** In Junos OS Release 12.2, traffic mapped to explicitly configured forwarding classes, even lossless forwarding classes such as **fcoe**, is treated as lossy (**best-effort**) traffic and does *not* receive lossless treatment. To receive lossless treatment in release 12.2, traffic must use one of the default lossless forwarding classes (**fcoe** or **no-loss**).

In Junos OS Release 12.3 and later, you can include the *no-loss* packet drop attribute in the explicit forwarding class configuration to configure a lossless forwarding class.

- Use the default trusted BA classifier, which maps incoming packets to forwarding classes by the IEEE 802.1p code point (CoS priority) of the packet. The trusted classifier is the default classifier for interfaces in trunk and tagged-access port modes. The default trusted classifier maps incoming packets with the IEEE 802.1p code point 3 (011) to the FCoE forwarding class. You can configure the BA classifier if you wish, but you must ensure that FCoE traffic is classified into forwarding classes in exactly the same way on both MC-LAG switches. Using the default classifier ensures consistent classifier configuration on the MC-LAG ports.
- Configure a congestion notification profile that enables PFC on the FCoE code point (code point 011 in this example). The congestion notification profile configuration must be the same on both MC-LAG switches.
- Apply the congestion notification profile to the interfaces.
- Configure enhanced transmission selection (ETS, also known as hierarchical scheduling) on the interfaces to provide the bandwidth required for lossless FCoE transport. Configuring ETS includes configuring bandwidth scheduling for the FCoE forwarding class, a forwarding class set (priority group) that includes the FCoE forwarding class, and a traffic control profile to assign bandwidth to the forwarding class set that includes FCoE traffic.
- Apply the ETS scheduling to the interfaces.
- Configure the port mode, MTU, and FCoE trusted or untrusted state for each interface to support lossless FCoE transport.

In addition, this example describes how to enable FIP snooping on the Transit Switch TS1 and TS2 ports that are connected to the FCoE servers and how to disable IGMP snooping on the FCoE VLAN. To provide secure access, FIP snooping must be enabled on the FCoE access ports.

This example focuses on the CoS configuration to support lossless FCoE transport across an MC-LAG. This example does not describe how to configure the properties of MC-LAGs and LAGs, although it does show you how to configure the port characteristics required



to support lossless transport and how to assign interfaces to the MC-LAG and to the LAGs.

Before you configure CoS, configure:

- The MC-LAGs that connect Switches S1 and S2 to Switches TS1 and TS2. ([“Example: Configuring Multichassis Link Aggregation” on page 1958](#) describes how to configure MC-LAGs.)
- The LAGs that connect the Transit Switches TS1 and TS2 to MC-LAG Switches S1 and S2. ([“Configuring Link Aggregation” on page 2033](#) describes how to configure LAGs.)
- The LAG that connects Switch S1 to Switch S2.

### Configuration

To configure CoS for lossless FCoE transport across an MC-LAG, perform these tasks:

- [Configuring MC-LAG Switches S1 and S2 on page 4525](#)
- [Configuring FCoE Transit Switches TS1 and TS2 on page 4526](#)
- [Results on page 4528](#)

#### CLI Quick Configuration

To quickly configure CoS for lossless FCoE transport across an MC-LAG, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI for MC-LAG Switch S1 and MC-LAG Switch S2 at the [edit] hierarchy level. The configurations on Switches S1 and S2 are identical because the CoS configuration must be identical, and because this example uses the same ports on both switches.

```
set class-of-service schedulers fcoe-sched priority low transmit-rate 3g
set class-of-service schedulers fcoe-sched shaping-rate percent 100
set class-of-service scheduler-maps fcoe-map forwarding-class fcoe scheduler fcoe-sched
set class-of-service forwarding-class-sets fcoe-pg class fcoe
set class-of-service traffic-control-profiles fcoe-tcp scheduler-map fcoe-map guaranteed-rate
3g
set class-of-service traffic-control-profiles fcoe-tcp shaping-rate percent 100
set class-of-service interfaces ae0 forwarding-class-set fcoe-pg output-traffic-control-profile
fcoe-tcp
set class-of-service interfaces ae1 forwarding-class-set fcoe-pg output-traffic-control-profile
fcoe-tcp
set class-of-service congestion-notification-profile fcoe-cnp input ieee-802.1 code-point 011 pfc
set class-of-service interfaces ae0 congestion-notification-profile fcoe-cnp
set class-of-service interfaces ae1 congestion-notification-profile fcoe-cnp
set vlans fcoe_vlan vlan-id 100
set protocols igmp-snooping vlan fcoe_vlan disable
set interfaces xe-0/0/10 ether-options 802.3ad ae0
set interfaces xe-0/0/11 ether-options 802.3ad ae0
set interfaces xe-0/0/20 ether-options 802.3ad ae1
set interfaces xe-0/0/21 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk vlan members fcoe_vlan
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk vlan members fcoe_vlan
set interfaces ae0 mtu 2180
set interfaces ae1 mtu 2180
set ethernet-switching-options secure-access-port interface ae0 fcoe-trusted
set ethernet-switching-options secure-access-port interface ae1 fcoe-trusted
```



To quickly configure CoS for lossless FCoE transport across an MC-LAG, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI for Transit Switch TS1 and Transit Switch TS2 at the [edit] hierarchy level. The configurations on Switches TS1 and TS2 are identical because the CoS configuration must be identical, and because this example uses the same ports on both switches.

```
set class-of-service schedulers fcoe-sched priority low transmit-rate 3g
set class-of-service schedulers fcoe-sched shaping-rate percent 100
set class-of-service scheduler-maps fcoe-map forwarding-class fcoe scheduler fcoe-sched
set class-of-service forwarding-class-sets fcoe-pg class fcoe
set class-of-service traffic-control-profiles fcoe-tcp scheduler-map fcoe-map guaranteed-rate
3g
set class-of-service traffic-control-profiles fcoe-tcp shaping-rate percent 100
set class-of-service interfaces ae1 forwarding-class-set fcoe-pg output-traffic-control-profile
fcoe-tcp
set class-of-service interfaces xe-0/0/30 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
set class-of-service interfaces xe-0/0/31 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
set class-of-service interfaces xe-0/0/32 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
set class-of-service interfaces xe-0/0/33 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
set class-of-service congestion-notification-profile fcoe-cnp input ieee-802.1 code-point 011 pfc
set class-of-service interfaces ae1 congestion-notification-profile fcoe-cnp
set class-of-service interfaces xe-0/0/30 congestion-notification-profile fcoe-cnp
set class-of-service interfaces xe-0/0/31 congestion-notification-profile fcoe-cnp
set class-of-service interfaces xe-0/0/32 congestion-notification-profile fcoe-cnp
set class-of-service interfaces xe-0/0/33 congestion-notification-profile fcoe-cnp
set vlans fcoe_vlan vlan-id 100
set protocols igmp-snooping vlan fcoe_vlan disable
set interfaces xe-0/0/25 ether-options 802.3ad ae1
set interfaces xe-0/0/26 ether-options 802.3ad ae1
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk vlan members fcoe_vlan
set interfaces xe-0/0/30 unit 0 family ethernet-switching port-mode tagged-access vlan members
fcoe_vlan
set interfaces xe-0/0/31 unit 0 family ethernet-switching port-mode tagged-access vlan members
fcoe_vlan
set interfaces xe-0/0/32 unit 0 family ethernet-switching port-mode tagged-access vlan members
fcoe_vlan
set interfaces xe-0/0/33 unit 0 family ethernet-switching port-mode tagged-access vlan members
fcoe_vlan
set interfaces ae1 mtu 2180
set interfaces xe-0/0/30 mtu 2180
set interfaces xe-0/0/31 mtu 2180
set interfaces xe-0/0/32 mtu 2180
set interfaces xe-0/0/33 mtu 2180
set ethernet-switching-options secure-access-port interface ae1 fcoe-trusted
set ethernet-switching-options secure-access-port vlan fcoe_vlan examine-fip examine-vn2v2
beacon-period 90000
```



**Configuring MC-LAG Switches S1 and S2**

**Step-by-Step Procedure** To configure CoS resource scheduling (ETS), PFC, the FCoE VLAN, and the LAG and MC-LAG interface membership and characteristics to support lossless FCoE transport across an MC-LAG (this example uses the default **fcoe** forwarding class and the default classifier to map incoming FCoE traffic to the FCoE IEEE 802.1p code point **011**, so you do not configure them):

1. Configure output scheduling for the FCoE queue:
 

```
[edit class-of-service]
user@switch# set schedulers fcoe-sched priority low transmit-rate 3g
user@switch# set schedulers fcoe-sched shaping-rate percent 100
```
2. Map the FCoE forwarding class to the FCoE scheduler (**fcoe-sched**):
 

```
[edit class-of-service]
user@switch# set scheduler-maps fcoe-map forwarding-class fcoe scheduler fcoe-sched
```
3. Configure the forwarding class set (**fcoe-pg**) for the FCoE traffic:
 

```
[edit class-of-service]
user@switch# set forwarding-class-sets fcoe-pg class fcoe
```
4. Define the traffic control profile (**fcoe-tcp**) to use on the FCoE forwarding class set:
 

```
[edit class-of-service]
user@switch# set traffic-control-profiles fcoe-tcp scheduler-map fcoe-map
guaranteed-rate 3g
user@switch# set traffic-control-profiles fcoe-tcp shaping-rate percent 100
```
5. Apply the FCoE forwarding class set and traffic control profile to the LAG and MC-LAG interfaces:
 

```
[edit class-of-service]
user@switch# set interfaces ae0 forwarding-class-set fcoe-pg output-traffic-control-profile
fcoe-tcp
user@switch# set interfaces ae1 forwarding-class-set fcoe-pg output-traffic-control-profile
fcoe-tcp
```
6. Enable PFC on the FCoE priority by creating a congestion notification profile (**fcoe-cnp**) that applies FCoE to the IEEE 802.1 code point **011**:
 

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe-cnp input ieee-802.1 code-point
011 pfc
```
7. Apply the PFC configuration to the LAG and MC-LAG interfaces:
 

```
[edit class-of-service]
user@switch# set interfaces ae0 congestion-notification-profile fcoe-cnp
user@switch# set interfaces ae1 congestion-notification-profile fcoe-cnp
```
8. Configure the VLAN for FCoE traffic (**fcoe\_vlan**):
 

```
[edit vlans]
user@switch# set fcoe_vlan vlan-id 100
```
9. Disable IGMP snooping on the FCoE VLAN:
 

```
[edit protocols]
user@switch# set igmp-snooping vlan fcoe_vlan disable
```



10. Add the member interfaces to the LAG between the two MC-LAG switches:

```
[edit interfaces]
user@switch# set xe-0/0/10 ether-options 802.3ad ae0
user@switch# set xe-0/0/11 ether-options 802.3ad ae0
```

11. Add the member interfaces to the MC-LAG:

```
[edit interfaces]
user@switch# set xe-0/0/20 ether-options 802.3ad ae1
user@switch# set xe-0/0/21 ether-options 802.3ad ae1
```

12. Configure the port mode as **trunk** and membership in the FCoE VLAN (**fcoe\_vlan**) for the LAG (**ae0**) and for the MC-LAG (**ae1**):

```
[edit interfaces]
user@switch# set interfaces ae0 unit 0 family ethernet-switching port-mode trunk vlan
members fcoe_vlan
user@switch# set interfaces ae1 unit 0 family ethernet-switching port-mode trunk vlan
members fcoe_vlan
```

13. Set the MTU to **2180** for the LAG and MC-LAG interfaces (2180 bytes is the minimum size required to handle FCoE packets because of the payload and header sizes; you can configure the MTU to a higher number of bytes if desired, but not less than 2180 bytes):

```
[edit interfaces]
user@switch# set ae0 mtu 2180
user@switch# set ae1 mtu 2180
```

14. Set the LAG and MC-LAG interfaces as FCoE trusted ports (ports that connect to other switches should be trusted and should not perform FIP snooping):

```
user@switch# set ethernet-switching-options secure-access-port interface ae0 fcoe-trusted
user@switch# set ethernet-switching-options secure-access-port interface ae1 fcoe-trusted
```

### *Configuring FCoE Transit Switches TS1 and TS2*

#### **Step-by-Step Procedure**

The CoS configuration on FCoE Transit Switches TS1 and TS2 is similar to the CoS configuration on MC-LAG Switches S1 and S2. However, the port configurations differ, and you must enable FIP snooping on the Switch TS1 and Switch TS2 FCoE access ports.

To configure resource scheduling (ETS), PFC, the FCoE VLAN, and the LAG interface membership and characteristics to support lossless FCoE transport across the MC-LAG (this example uses the default **fcoe** forwarding class and the default classifier to map incoming FCoE traffic to the FCoE IEEE 802.1p code point **011**, so you do not configure them):

1. Configure output scheduling for the FCoE queue:

```
[edit class-of-service]
user@switch# set schedulers fcoe-sched priority low transmit-rate 3g
user@switch# set schedulers fcoe-sched shaping-rate percent 100
```

2. Map the FCoE forwarding class to the FCoE scheduler (**fcoe-sched**):

```
[edit class-of-service]
user@switch# set scheduler-maps fcoe-map forwarding-class fcoe scheduler fcoe-sched
```

3. Configure the forwarding class set (**fcoe-pg**) for the FCoE traffic:



- ```
[edit class-of-service]
user@switch# set forwarding-class-sets fcoe-pg class fcoe
```
4. Define the traffic control profile (**fcoe-tcp**) to use on the FCoE forwarding class set:
 

```
[edit class-of-service]
user@switch# set traffic-control-profiles fcoe-tcp scheduler-map fcoe-map
guaranteed-rate 3g
user@switch# set traffic-control-profiles fcoe-tcp shaping-rate percent 100
```
  5. Apply the FCoE forwarding class set and traffic control profile to the LAG interface and to the FCoE access interfaces:
 

```
[edit class-of-service]
user@switch# set interfaces ae1 forwarding-class-set fcoe-pg output-traffic-control-profile
fcoe-tcp
user@switch# set class-of-service interfaces xe-0/0/30 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
user@switch# set class-of-service interfaces xe-0/0/31 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
user@switch# set class-of-service interfaces xe-0/0/32 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
user@switch# set class-of-service interfaces xe-0/0/33 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
```
  6. Enable PFC on the FCoE priority by creating a congestion notification profile (**fcoe-cnp**) that applies FCoE to the IEEE 802.1 code point 011:
 

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe-cnp input ieee-802.1 code-point
011 pfc
```
  7. Apply the PFC configuration to the LAG interface and to the FCoE access interfaces:
 

```
[edit class-of-service]
user@switch# set interfaces ae1 congestion-notification-profile fcoe-cnp
user@switch# set class-of-service interfaces xe-0/0/30 congestion-notification-profile
fcoe-cnp
user@switch# set class-of-service interfaces xe-0/0/31 congestion-notification-profile
fcoe-cnp
user@switch# set class-of-service interfaces xe-0/0/32 congestion-notification-profile
fcoe-cnp
user@switch# set class-of-service interfaces xe-0/0/33 congestion-notification-profile
fcoe-cnp
```
  8. Configure the VLAN for FCoE traffic (**fcoe\_vlan**):
 

```
[edit vlans]
user@switch# set fcoe_vlan vlan-id 100
```
  9. Disable IGMP snooping on the FCoE VLAN:
 

```
[edit protocols]
user@switch# set igmp-snooping vlan fcoe_vlan disable
```
  10. Add the member interfaces to the LAG:
 

```
[edit interfaces]
user@switch# set xe-0/0/25 ether-options 802.3ad ae1
user@switch# set xe-0/0/26 ether-options 802.3ad ae1
```
  11. On the LAG (**ae1**), configure the port mode as **trunk** and membership in the FCoE VLAN (**fcoe\_vlan**):



```
[edit interfaces]
user@switch# set interfaces ae1 unit 0 family ethernet-switching port-mode trunk vlan
members fcoe_vlan
```

12. On the FCoE access interfaces (xe-0/0/30, xe-0/0/31, xe-0/0/32, xe-0/0/33), configure the port mode as **tagged-access** and membership in the FCoE VLAN (**fcoe\_vlan**):

```
[edit interfaces]
user@switch# set interfaces xe-0/0/30 unit 0 family ethernet-switching port-mode
tagged-access vlan members fcoe_vlan
user@switch# set interfaces xe-0/0/31 unit 0 family ethernet-switching port-mode
tagged-access vlan members fcoe_vlan
user@switch# set interfaces xe-0/0/32 unit 0 family ethernet-switching port-mode
tagged-access vlan members fcoe_vlan
user@switch# set interfaces xe-0/0/33 unit 0 family ethernet-switching port-mode
tagged-access vlan members fcoe_vlan
```

13. Set the MTU to **2180** for the LAG and FCoE access interfaces (2180 bytes is the minimum size required to handle FCoE packets because of the payload and header sizes; you can configure the MTU to a higher number of bytes if desired, but not less than 2180 bytes):

```
[edit interfaces]
user@switch# set ae1 mtu 2180
user@switch# set xe-0/0/30 mtu 2180
user@switch# set xe-0/0/31 mtu 2180
user@switch# set xe-0/0/32 mtu 2180
user@switch# set xe-0/0/33 mtu 2180
```

14. Set the LAG interface as an FCoE trusted port (ports that connect to other switches should be trusted and should not perform FIP snooping):

```
user@switch# set ethernet-switching-options secure-access-port interface ae1 fcoe-trusted
```

15. Enable FIP snooping on the FCoE VLAN to prevent unauthorized FCoE network access (this example uses VN2VN\_Port FIP snooping; the example is equally valid if you use VN2VF\_Port FIP snooping):

```
user@switch# set ethernet-switching-options secure-access-port vlan fcoe_vlan
examine-fip examine-vn2v2 beacon-period 90000
```

## Results

Display the results of the CoS configuration on MC-LAG Switch S1 and on MC-LAG Switch S2 (the results on both switches are similar):

```
user@switch> show configuration class-of-service
traffic-control-profiles {
  fcoe-tcp {
    scheduler-map fcoe-map;
    shaping-rate percent 100;
    guaranteed-rate 30000000000;
  }
}
forwarding-class-sets {
  fcoe-pg {
    class fcoe;
  }
}
```



```

}
congestion-notification-profile {
  fcoe-cnp {
    input {
      ieee-802.1 {
        code-point 011 {
          pfc;
        }
      }
    }
  }
}
interfaces {
  ae0 {
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    congestion-notification-profile fcoe-cnp;
  }
  ae1 {
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    congestion-notification-profile fcoe-cnp;
  }
}
scheduler-maps {
  fcoe-map {
    forwarding-class fcoe scheduler fcoe-sched;
  }
}
schedulers {
  fcoe-sched {
    transmit-rate 3000000000;
    shaping-rate percent 100;
    priority low;
  }
}

```



**NOTE:** The forwarding class and classifier configurations are not shown because the show command does not display default portions of the configuration.

For MC-LAG verification commands, see [“Example: Configuring Multichassis Link Aggregation” on page 1958](#).

Display the results of the CoS configuration on FCoE Transit Switch TS1 and on FCoE Transit Switch TS2 (the results on both transit switches are similar):



```
user@switch> show configuration class-of-service
traffic-control-profiles {
  fcoe-tcp {
    scheduler-map fcoe-map;
    shaping-rate percent 100;
    guaranteed-rate 3000000000;
  }
}
forwarding-class-sets {
  fcoe-pg {
    class fcoe;
  }
}
congestion-notification-profile {
  fcoe-cnp {
    input {
      ieee-802.1 {
        code-point 011 {
          pfc;
        }
      }
    }
  }
}
interfaces {
  xe-0/0/30 {
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    congestion-notification-profile fcoe-cnp;
  }
  xe-0/0/31 {
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    congestion-notification-profile fcoe-cnp;
  }
  xe-0/0/32 {
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    congestion-notification-profile fcoe-cnp;
  }
  xe-0/0/33 {
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    congestion-notification-profile fcoe-cnp;
  }
}
```



```

}
ae1 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
}
scheduler-maps {
  fcoe-map {
    forwarding-class fcoe scheduler fcoe-sched;
  }
}
schedulers {
  fcoe-sched {
    transmit-rate 3000000000;
    shaping-rate percent 100;
    priority low;
  }
}
}

```



**NOTE:** The forwarding class and classifier configurations are not shown because the show command does not display default portions of the configuration.

## Verification

To verify that the CoS components and FIP snooping have been configured and are operating properly, perform these tasks. Because this example uses the default **fcoe** forwarding class and the default IEEE 802.1p trusted classifier, the verification of those configurations is not shown:

- [Verifying That the Output Queue Schedulers Have Been Created on page 4532](#)
- [Verifying That the Priority Group Output Scheduler \(Traffic Control Profile\) Has Been Created on page 4532](#)
- [Verifying That the Forwarding Class Set \(Priority Group\) Has Been Created on page 4533](#)
- [Verifying That Priority-Based Flow Control Has Been Enabled on page 4533](#)
- [Verifying That the Interface Class of Service Configuration Has Been Created on page 4534](#)
- [Verifying That the Interfaces Are Correctly Configured on page 4536](#)
- [Verifying That FIP Snooping Is Enabled on the FCoE VLAN on FCoE Transit Switches TS1 and TS2 Access Interfaces on page 4538](#)
- [Verifying That the FIP Snooping Mode is Correct on FCoE Transit Switches TS1 and TS2 on page 4539](#)
- [Verifying That IGMP Snooping Is Disabled on the FCoE VLAN on page 4539](#)



***Verifying That the Output Queue Schedulers Have Been Created***

**Purpose** Verify that the output queue scheduler for FCoE traffic has the correct bandwidth parameters and priorities, and is mapped to the correct forwarding class (output queue). Queue scheduler verification is the same on each of the four switches.

**Action** List the scheduler map using the operational mode command **show class-of-service scheduler-map fcoe-map**:

```
user@switch> show class-of-service scheduler-map fcoe-map
Scheduler map: fcoe-map, Index: 9023
```

```
Scheduler: fcoe-sched, Forwarding class: fcoe, Index: 37289
Transmit rate: 3000000000 bps, Rate Limit: none, Buffer size: remainder,
Buffer Limit: none, Priority: low
Excess Priority: unspecified
Shaping rate: 100 percent,
drop-profile-map-set-type: mark
Drop profiles:
  Loss priority  Protocol  Index  Name
  Low           any       1      <default-drop-profile>
  Medium high   any       1      <default-drop-profile>
  High          any       1      <default-drop-profile>
```

**Meaning** The **show class-of-service scheduler-map fcoe-map** command lists the properties of the scheduler map **fcoe-map**. The command output includes:

- The name of the scheduler map (**fcoe-map**)
- The name of the scheduler (**fcoe-sched**)
- The forwarding classes mapped to the scheduler (**fcoe**)
- The minimum guaranteed queue bandwidth (transmit rate **3000000000 bps**)
- The scheduling priority (**low**)
- The maximum bandwidth in the priority group the queue can consume (shaping rate **100 percent**)
- The drop profile loss priority for each drop profile name. This example does not include drop profiles because you do not apply drop profiles to FCoE traffic.

***Verifying That the Priority Group Output Scheduler (Traffic Control Profile) Has Been Created***

**Purpose** Verify that the traffic control profile **fcoe-tcp** has been created with the correct bandwidth parameters and scheduler mapping. Priority group scheduler verification is the same on each of the four switches.

**Action** List the FCoE traffic control profile properties using the operational mode command **show class-of-service traffic-control-profile fcoe-tcp**:

```
user@switch> show class-of-service traffic-control-profile fcoe-tcp
Traffic control profile: fcoe-tcp, Index: 18303
Shaping rate: 100 percent
```



```
Scheduler map: fcoe-map
Guaranteed rate: 3000000000
```

**Meaning** The **show class-of-service traffic-control-profile fcoe-tcp** command lists all of the configured traffic control profiles. For each traffic control profile, the command output includes:

- The name of the traffic control profile (**fcoe-tcp**)
- The maximum port bandwidth the priority group can consume (shaping rate **100 percent**)
- The scheduler map associated with the traffic control profile (**fcoe-map**)
- The minimum guaranteed priority group port bandwidth (guaranteed rate **3000000000** in bps)

#### *Verifying That the Forwarding Class Set (Priority Group) Has Been Created*

**Purpose** Verify that the FCoE priority group has been created and that the **fcoe** priority (forwarding class) belongs to the FCoE priority group. Forwarding class set verification is the same on each of the four switches.

**Action** List the forwarding class sets using the operational mode command **show class-of-service forwarding-class-set fcoe-pg**:

```
user@switch> show class-of-service forwarding-class-set fcoe-pg
Forwarding class set: fcoe-pg, Type: normal-type, Forwarding class set index:
31420
  Forwarding class      Index
  fcoe                  1
```

**Meaning** The **show class-of-service forwarding-class-set fcoe-pg** command lists all of the forwarding classes (priorities) that belong to the **fcoe-pg** priority group, and the internal index number of the priority group. The command output shows that the forwarding class set **fcoe-pg** includes the forwarding class **fcoe**.

#### *Verifying That Priority-Based Flow Control Has Been Enabled*

**Purpose** Verify that PFC is enabled on the FCoE code point. PFC verification is the same on each of the four switches.

**Action** List the FCoE congestion notification profile using the operational mode command **show class-of-service congestion-notification fcoe-cnp**:

```
user@switch> show class-of-service congestion-notification fcoe-cnp
Type: Input, Name: fcoe-cnp, Index: 6879
Cable Length: 100 m
  Priority  PFC      MRU
  000      Disabled
  001      Disabled
  010      Disabled
  011      Enabled   2500
  100      Disabled
  101      Disabled
```



110	Disabled
111	Disabled
Type: Output	
Priority	Flow-Control-Queues
000	
	0
001	
	1
010	
	2
011	
	3
100	
	4
101	
	5
110	
	6
111	
	7

**Meaning** The **show class-of-service congestion-notification fcoe-cnp** command lists all of the IEEE 802.1p code points in the congestion notification profile that have PFC enabled. The command output shows that PFC is enabled on code point **011** (**fcoe** queue) for the **fcoe-cnp** congestion notification profile.

The command also shows the default cable length (100 meters), the default maximum receive unit (2500 bytes), and the default mapping of priorities to output queues because this example does not include configuring these options.

#### ***Verifying That the Interface Class of Service Configuration Has Been Created***

**Purpose** Verify that the CoS properties of the interfaces are correct. The verification output on MC-LAG Switches S1 and S2 differs from the output on FCoE Transit Switches TS1 and TS2.

**Action** List the interface CoS configuration on MC-LAG Switches S1 and S2 using the operational mode command **show configuration class-of-service interfaces**:

```
user@switch> show configuration class-of-service interfaces
ae0 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}

ae1 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
```



```
}
```

List the interface CoS configuration on FCoE Transit Switches TS1 and TS2 using the operational mode command **show configuration class-of-service interfaces**:

```
user@switch> show configuration class-of-service interfaces
xe-0/0/30 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
xe-0/0/31 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
xe-0/0/32 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
xe-0/0/33 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
ae1 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
```

**Meaning** The **show configuration class-of-service interfaces** command lists the class of service configuration for all interfaces. For each interface, the command output includes:

- The name of the interface (for example, **ae0** or **xe-0/0/30**)
- The name of the forwarding class set associated with the interface (**fcoe-pg**)
- The name of the traffic control profile associated with the interface (output traffic control profile, **fcoe-tcp**)
- The name of the congestion notification profile associated with the interface (**fcoe-cnp**)





**NOTE:** Interfaces that are members of a LAG are not shown individually. The LAG or MC-LAG CoS configuration is applied to all interfaces that are members of the LAG or MC-LAG. For example, the interface CoS configuration output on MC-LAG Switches S1 and S2 shows the LAG CoS configuration but does not show the CoS configuration of the member interfaces separately. The interface CoS configuration output on FCoE Transit Switches TS1 and TS2 shows the LAG CoS configuration but also shows the configuration for interfaces xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33, which are not members of a LAG.

### ***Verifying That the Interfaces Are Correctly Configured***

**Purpose** Verify that the LAG membership, MTU, VLAN membership, and port mode of the interfaces are correct. The verification output on MC-LAG Switches S1 and S2 differs from the output on FCoE Transit Switches T1 and T2.

**Action** List the interface configuration on MC-LAG Switches S1 and S2 using the operational mode command **show configuration interfaces**:

```
user@switch> show configuration interfaces
xe-0/0/10 {
    ether-options {
        802.3ad ae0;
    }
}
xe-0/0/11 {
    ether-options {
        802.3ad ae0;
    }
}
xe-0/0/20 {
    ether-options {
        802.3ad ae1;
    }
}
xe-0/0/21 {
    ether-options {
        802.3ad ae1;
    }
}
ae0 {
    mtu 2180;
    unit 0 {
        family ethernet-switching {
            port-mode trunk;
            vlan {
                members fcoe_vlan;
            }
        }
    }
}
ae1 {
    mtu 2180;
    unit 0 {
```



```

        family ethernet-switching {
            port-mode trunk;
            vlan {
                members fcoe_vlan;
            }
        }
    }
}

```

List the interface configuration on FCoE Transit Switches TS1 and TS2 using the operational mode command **show configuration interfaces**:

```

user@switch> show configuration interfaces
xe-0/0/25 {
    ether-options {
        802.3ad ae1;
    }
}
xe-0/0/26 {
    ether-options {
        802.3ad ae1;
    }
}
xe-0/0/30 {
    mtu 2180;
    unit 0 {
        family ethernet-switching {
            port-mode tagged-access;
            vlan {
                members fcoe_vlan;
            }
        }
    }
}
xe-0/0/31 {
    mtu 2180;
    unit 0 {
        family ethernet-switching {
            port-mode tagged-access;
            vlan {
                members fcoe_vlan;
            }
        }
    }
}
xe-0/0/32 {
    mtu 2180;
    unit 0 {
        family ethernet-switching {
            port-mode tagged-access;
            vlan {
                members fcoe_vlan;
            }
        }
    }
}
xe-0/0/33 {
    mtu 2180;
    unit 0 {
        family ethernet-switching {

```



```
        port-mode tagged-access;
        vlan {
            members fcoe_vlan;
        }
    }
}

ae1 {
    mtu 2180;
    unit 0 {
        family ethernet-switching {
            port-mode trunk;
            vlan {
                members fcoe_vlan;
            }
        }
    }
}
```

**Meaning** The **show configuration interfaces** command lists the configuration of each interface by interface name.

For each interface that is a member of a LAG, the command lists only the name of the LAG to which the interface belongs.

For each LAG interface and for each interface that is not a member of a LAG, the command output includes:

- The MTU (**2180**)
- The unit number of the interface (**0**)
- The port mode (**trunk** mode for interfaces that connect two switches, **tagged-access** mode for interfaces that connect to FCoE hosts)
- The name of the VLAN in which the interface is a member (**fcoe\_vlan**)

***Verifying That FIP Snooping Is Enabled on the FCoE VLAN on FCoE Transit Switches TS1 and TS2 Access Interfaces***

**Purpose** Verify that FIP snooping is enabled on the FCoE VLAN access interfaces. FIP snooping is enabled only on the FCoE access interfaces, so it is enabled only on FCoE Transit Switches TS1 and TS2. FIP snooping is not enabled on MC-LAG Switches S1 and S2 because FIP snooping is done at the Switch TS1 and TS2 FCoE access ports.

**Action** List the port security configuration on FCoE transit switches TS1 and TS2 using the operational mode command **show configuration ethernet-switching-options secure-access-port**:

```
user@switch> show configuration ethernet-switching-options secure-access-port
interface ae1.0 {
    fcoe-trusted;
}
vlan fcoe_vlan {
```



```
    examine-fip;
}
```

**Meaning** The `show configuration ethernet-switching-options secure-access-port` command lists port security information, including whether a port is trusted. The command output shows that:

- LAG port **ae1.0**, which connects the FCoE transit switch to the MC-LAG switches, is configured as an FCoE trusted interface. FIP snooping is not performed on the member interfaces of the LAG (**xe-0/0/25** and **xe-0/0/26**).
- FIP snooping is enabled (**examine-fip**) on the FCoE VLAN (**fcoe\_vlan**). On Switches TS1 and TS2, all interface members of the FCoE VLAN perform FIP snooping unless the interface is configured as FCoE trusted. On Switches TS1 and TS2, interfaces **xe-0/0/30**, **xe-0/0/31**, **xe-0/0/32**, and **xe-0/0/33** perform FIP snooping because they are not configured as FCoE trusted. The interface members of LAG **ae1** (**xe-0/0/25** and **xe-0/0/26**) do not perform FIP snooping because the LAG is configured as FCoE trusted.

#### *Verifying That the FIP Snooping Mode is Correct on FCoE Transit Switches TS1 and TS2*

**Purpose** Verify that the FIP snooping mode is correct on the FCoE VLAN. FIP snooping is enabled only on the FCoE access interfaces, so it is enabled only on FCoE Transit Switches TS1 and TS2. FIP snooping is not enabled on MC-LAG Switches S1 and S2 because FIP snooping is done at the Switch TS1 and TS2 FCoE access ports.

**Action** List the FIP snooping configuration on FCoE Transit Switches TS1 and TS2 using the operational mode command **show fip snooping brief**:

```
user@switch> show fip snooping brief
VLAN: fcoe_vlan,    Mode: VN2VN Snooping
FC-MAP: 0e:fc:00
...
```



**NOTE:** The output has been truncated to show only the relevant information.

**Meaning** The `show fip snooping brief` command lists FIP snooping information, including the FIP snooping VLAN and the FIP snooping mode. The command output shows that:

- The VLAN on which FIP snooping is enabled is **fcoe\_vlan**
- The FIP snooping mode is VN2VN\_Port FIP snooping (**VN2VN Snooping**)

#### *Verifying That IGMP Snooping Is Disabled on the FCoE VLAN*

**Purpose** Verify that IGMP snooping is disabled on the FCoE VLAN on all four switches.



**Action** List the IGMP snooping protocol information on each of the four switches using the **show configuration protocols igmp-snooping** command:

```
user@switch> show configuration protocols igmp-snooping
vlan fcoe_vlan {
    disable;
}
```

**Meaning** The **show configuration protocols igmp-snooping** command lists the IGMP snooping configuration for the VLANs configured on the switch. The command output shows that IGMP snooping is disabled on the FCoE VLAN (**fcoe\_vlan**).

- Related Documentation**
- [Example: Configuring Multichassis Link Aggregation on page 1958](#)
  - [Configuring Link Aggregation on page 2033](#)
  - [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)
  - [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
  - [Understanding Multichassis Link Aggregation on page 1931](#)
  - [Understanding MC-LAGs on an FCoE Transit Switch on page 4459](#)

## Example: Configuring DCBX Application Protocol TLV Exchange

Data Center Bridging Capability Exchange protocol (DCBX) discovers the data center bridging (DCB) capabilities of connected peers by exchanging application configuration information. DCBX detects feature misconfiguration and mismatches and can configure DCB on peers. DCBX is an extension of the Link Layer Discovery Protocol (LLDP). LLDP must remain enabled on every interface on which you want to use DCBX.



**NOTE:** LLDP and DCBX are enabled by default on all interfaces.

---

The switch supports DCBX application protocol exchange for Layer 2 and Layer 4 applications such as the Internet Small Computer System Interface (iSCSI). You specify applications by EtherType (for Layer 2 applications) or by the destination port and protocol (for Layer 4 applications; the protocol can be either TCP or UDP).

The QFX Series handles Fibre Channel over Ethernet (FCoE) application protocol exchange differently than other protocols in some cases:

- If FCoE is the only application for which you want to enable DCBX application protocol TLV exchange on an interface, you do not have to explicitly configure the FCoE application or an application map. By default, the QFX Series exchanges FCoE application protocol TLVs on all interfaces that carry FCoE traffic (traffic mapped to the **fcoe** forwarding class) and have priority-based flow control (PFC) enabled on the FCoE priority (the FCoE IEEE 802.1p code point). The default priority mapping for the FCoE application is IEEE 802.1p code point 011 (the default **fcoe** forwarding class code point).



- If you want an interface to use DCBX to exchange application protocol TLVs for any other applications in addition to FCoE, you must configure the applications (including FCoE), define an application map (including FCoE), and apply the application map to the interface. If you apply an application map to an interface, you must explicitly configure the FCoE application, or the interface does not exchange FCoE application protocol TLVs.

This example shows how to configure interfaces to exchange both Layer 2 and Layer 4 applications by configuring one interface to exchange iSCSI and FCoE application protocol information and configuring another interface to exchange iSCSI and Precision Time Protocol (PTP) application protocol information.

- [Requirements on page 4541](#)
- [Overview on page 4541](#)
- [Configuration on page 4545](#)
- [Verification on page 4546](#)

### Requirements

This example uses the following hardware and software components:

- Juniper Networks QFX Series device
- Junos OS Release 12.1 or later for the QFX Series

### Overview

The switch supports DCBX application protocol exchange for:

- Layer 2 applications, defined by EtherType
- Layer 4 applications, defined by destination port and protocol



**NOTE:** DCBX also advertises PFC and enhanced transmission selection (ETS) information. See [“Configuring DCBX Autonegotiation” on page 4601](#) for how DCBX negotiates and advertises configuration information for these features and for the applications.

DCBX is configured on a per-interface basis for each supported feature or application. For applications that you want to enable for DCBX application protocol exchange, you must:

- Define the application name and configure the EtherType or the destination port and protocol (TCP or UDP) of the application. Use the EtherType for Layer 2 applications, and use the destination port and protocol for Layer 4 protocols.
- Map the application to an IEEE 802.1p code point in an application map.
- Add the application map to DCBX interface.



In addition, for all applications (including FCoE, even when you do not use an application map), you either must create an IEEE 802.1p classifier and apply it to the appropriate ingress interfaces or use the default classifier. A classifier maps the code points of incoming traffic to a forwarding class and a loss priority so that ingress traffic is assigned to the correct class of service (CoS). The forwarding class determines the output queue on the egress interface.

If you do not create classifiers, trunk and tagged-access ports use the unicast IEEE 802.1 default trusted classifier. [Table 317 on page 4542](#) shows the default mapping of IEEE 802.1 code-point values to unicast forwarding classes and loss priorities for ports in trunk mode or tagged-access mode. [Table 318 on page 4542](#) shows the default untrusted classifier IEEE 802.1 code-point values to unicast forwarding class mapping for ports in access mode.

**Table 317: Default IEEE 802.1 Classifiers for Trunk Ports and Tagged-Access Ports (Default Trusted Classifier)**

Code Point	Forwarding Class	Loss Priority
be (000)	best-effort	low
be1 (001)	best-effort	low
ef (010)	best-effort	low
ef1 (011)	fcoe	low
af11 (100)	no-loss	low
af12 (101)	best-effort	low
nc1 (110)	network-control	low
nc2 (111)	network-control	low

**Table 318: Default IEEE 802.1 Unicast Classifiers for Access Ports (Default Untrusted Classifier)**

Code Point	Forwarding Class	Loss Priority
000	best-effort	low
001	best-effort	low
010	best-effort	low
011	best-effort	low
100	best-effort	low
101	best-effort	low



**Table 318: Default IEEE 802.1 Unicast Classifiers for Access Ports (Default Untrusted Classifier) (continued)**

Code Point	Forwarding Class	Loss Priority
110	best-effort	low
111	best-effort	low

### Topology

This example shows how to configure DCBX application protocol exchange for three protocols (iSCSI, PTP, and FCoE) on two interfaces. One interface exchanges iSCSI and FCoE application protocol information, and the other interface exchanges iSCSI and PTP application protocol information.



**NOTE:** You must map FCoE traffic to the interfaces on which you want to forward FCoE traffic. You must also enable PFC on the FCoE interfaces and create an ingress classifier for FCoE traffic, or else use the default classifier.

Table 319 on page 4543 shows the configuration components for this example.

**Table 319: Components of DCBX Application Protocol Exchange Configuration Topology**

Component	Settings
Hardware	QFX Series device
LLDP	Enabled by default on Ethernet interfaces
DCBX	Enabled by default on Ethernet interfaces
iSCSI application (Layer 4)	Application name— <b>iscsi</b> protocol— <b>TCP</b> destination-port— <b>3260</b> code-points— <b>111</b>
PTP application (Layer 2)	Application name— <b>ptp</b> ether-type— <b>0x88F7</b> code-points— <b>001, 101</b>



Table 319: Components of DCBX Application Protocol Exchange Configuration Topology (*continued*)

Component	Settings
FCoE application (Layer 2)	<p>Application name—<b>fcoe</b></p> <p>ether-type—<b>0x8906</b></p> <p>code-points—<b>011</b></p> <p><b>NOTE:</b> You explicitly configure the FCoE application because you are applying an application map to the interface. When you apply an application map to an interface, all applications must be explicitly configured and included in the application map.</p>
Application maps	<p><b>dcbx-iscsi-fcoe-app-map</b>—Maps the iSCSI and FCoE applications to IEEE 802.1p code points</p> <p><b>dcbx-iscsi-ptp-app-map</b>—Maps iSCSI and PTP applications to IEEE 802.1p code points</p>
Interfaces	<p><b>xe-0/0/10</b>—Configured to exchange FCoE and iSCSI application TLVs (uses application map <b>dcbx-iscsi-fcoe-app-map</b>, carries FCoE traffic, and has PFC enabled on the FCoE priority)</p> <p><b>xe-0/0/11</b>—Configured to exchange iSCSI and PTP application TLVs (uses application map <b>dcbx-iscsi-ptp-app-map</b>)</p>
PFC congestion notification profile for FCoE application exchange	<p><b>fcoe-cnp:</b></p> <ul style="list-style-type: none"> <li>Code point—<b>011</b></li> <li>Interface—<b>xe-0/0/10</b></li> </ul>
Behavior aggregate classifiers (map forwarding classes to incoming packets by the packet's IEEE 802.1 code point)	<p><b>fcoe-iscsi-cl1:</b></p> <ul style="list-style-type: none"> <li>Maps the <b>fcoe</b> forwarding class to the IEEE 802.1p code point used for the FCoE application (<b>011</b>) and a loss priority of <b>high</b></li> <li>Maps the <b>network-control</b> forwarding class to the IEEE 802.1p code point used for the iSCSI application (<b>111</b>) and a loss priority of <b>high</b></li> <li>Applied to interface <b>xe-0/0/10</b></li> </ul> <p><b>iscsi-ptp-cl2:</b></p> <ul style="list-style-type: none"> <li>Maps the <b>network-control</b> forwarding class to the IEEE 802.1p code point used for the iSCSI application (<b>111</b>) and a loss priority of <b>low</b></li> <li>Maps the <b>best-effort</b> forwarding class to the IEEE 802.1p code points used for the PTP application (<b>001</b> and <b>101</b>) and a loss priority of <b>low</b></li> <li>Applied to interface <b>xe-0/0/11</b></li> </ul>



**NOTE:** This example does not include scheduling (bandwidth allocation) configuration or lossless configuration for the iSCSI forwarding class.



## Configuration

**CLI Quick Configuration** To quickly configure DCBX application protocol exchange, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set applications application iSCSI protocol tcp destination-port 3260
set applications application FCoE ether-type 0x8906
set applications application PTP ether-type 0x88F7
set policy-options application-maps dcbx-iscsi-fcoe-app-map application iSCSI code-points 111
set policy-options application-maps dcbx-iscsi-fcoe-app-map application FCoE code-points 011
set policy-options application-maps dcbx-iscsi-ntp-app-map application iSCSI code-points 111
set policy-options application-maps dcbx-iscsi-ntp-app-map application PTP code-points [001 101]
set protocols dcbx interface xe-0/0/10 application-map dcbx-iscsi-fcoe-app-map
set protocols dcbx interface xe-0/0/11 application-map dcbx-iscsi-ntp-app-map
set class-of-service congestion-notification-profile fcoe-cnp input ieee-802.1 code-point 011 pfc
set class-of-service interfaces xe-0/0/10 congestion-notification-profile fcoe-cnp
set class-of-service classifiers ieee-802.1 fcoe-iscsi-cl1 import default forwarding-class fcoe
loss-priority high code-points 011
set class-of-service classifiers ieee-802.1 fcoe-iscsi-cl1 import default forwarding-class
network-control loss-priority high code-points 111
set class-of-service classifiers ieee-802.1 iscsi-ntp-cl2 import default forwarding-class
network-control loss-priority low code-points 111
set class-of-service classifiers ieee-802.1 iscsi-ntp-cl2 import default forwarding-class best-effort
loss-priority low code-points [001 101]
set class-of-service interfaces xe-0/0/10 unit 0 classifiers ieee-802.1 fcoe-iscsi-cl1
set class-of-service interfaces xe-0/0/11 unit 0 classifiers ieee-802.1 iscsi-ntp-cl2
```

### Configuring DCBX Application Protocol TLV Exchange

**Step-by-Step Procedure** To define the applications, map the applications to IEEE 802.1p code points, apply the applications to interfaces, and create classifiers for DCBX application protocol exchange:

1. Define the iSCSI application by specifying its protocol and destination port, and define the FCoE and PTP applications by specifying their EtherTypes.  
  

```
[edit applications]
user@switch# set application iSCSI protocol tcp destination-port 3260
user@switch# set application FCoE ether-type 0x8906
user@switch# set application PTP ether-type 0x88F7
```
2. Define an application map that maps the iSCSI and FCoE applications to IEEE 802.1p code points.  
  

```
[edit policy-options]
user@switch# set application-maps dcbx-iscsi-fcoe-app-map application iSCSI code-points 111
user@switch# set application-maps dcbx-iscsi-fcoe-app-map application FCoE code-points 011
```
3. Define the application map that maps the iSCSI and PTP applications to IEEE 802.1p code points.  
  

```
[edit policy-options]
user@switch# set application-maps dcbx-iscsi-ntp-app-map application iSCSI code-points 111
user@switch# set application-maps dcbx-iscsi-ntp-app-map application PTP code-points [001 101]
```



4. Apply the iSCSI and FCoE application map to interface **xe-0/0/10**, and apply the iSCSI and PTP application map to interface **xe-0/0/11**.

```
[edit protocols dcbx]
user@switch# set interface xe-0/0/10 application-map dcbx-iscsi-fcoe-app-map
user@switch# set interface xe-0/0/11 application-map dcbx-iscsi-ptp-app-map
```

5. Create the congestion notification profile to enable PFC on the FCoE code point (**011**), and apply the congestion notification profile to interface **xe-0/0/10**.

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe-cnp input ieee-802.1 code-point
011 pfc
user@switch# set interfaces xe-0/0/10 congestion-notification-profile fcoe-cnp
```

6. Configure the classifier to apply to the interface that exchanges iSCSI and FCoE application information.

```
[edit class-of-service classifiers]
user@switch# set ieee-802.1 fcoe-iscsi-cl1 import default forwarding-class fcoe loss-priority
high code-points 011
user@switch# set ieee-802.1 fcoe-iscsi-cl1 import default forwarding-class network-control
loss-priority high code-points 111
```

7. Configure the classifier to apply to the interface that exchanges iSCSI and PTP application information.

```
[edit class-of-service classifiers]
user@switch# set ieee-802.1 iscsi-ptp-cl2 import default forwarding-class network-control
loss-priority low code-points 111
user@switch# set ieee-802.1 iscsi-ptp-cl2 import default forwarding-class best-effort
loss-priority low code-points [001 101]
```

8. Apply the classifiers to the appropriate interfaces.

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/10 unit 0 classifiers ieee-802.1 fcoe-iscsi-cl1
user@switch# set interfaces xe-0/0/11 unit 0 classifiers ieee-802.1 iscsi-ptp-cl2
```

---

## Verification

To verify that DCBX application protocol exchange configuration has been created and is operating properly, perform these tasks:

- [Verifying the Application Configuration on page 4546](#)
- [Verifying the Application Map Configuration on page 4547](#)
- [Verifying DCBX Application Protocol Exchange Interface Configuration on page 4547](#)
- [Verifying the PFC Configuration on page 4548](#)
- [Verifying the Classifier Configuration on page 4549](#)

### *Verifying the Application Configuration*

**Purpose** Verify that DCBX applications have been configured.

**Action** List the applications by using the configuration mode command **show applications**:

```
user@switch# show applications
```



```

application iSCSI {
    protocol tcp;
    destination-port 3260;
}

application fcoe {
    ether-type 0x8906;
}

application ptp {
    ether-type 0x88F7;
}

```

**Meaning** The **show applications** configuration mode command lists all of the configured applications and either their protocol and destination port (Layer 4 applications) or their EtherType (Layer 2 applications). The command output shows that the iSCSI application is configured with the **tcp** protocol and destination port **3260**, the FCoE application is configured with the EtherType **0x8906**, and that the PTP application is configured with the EtherType **0x88F7**.

#### *Verifying the Application Map Configuration*

**Purpose** Verify that the application maps have been configured.

**Action** List the application maps by using the configuration mode command **show policy-options application-maps**:

```

user@switch# show policy-options application-maps
dcbx-iscsi-fcoe-app-map {
    application iSCSI code-points 111;
    application FCoE code-points 011;
}

dcbx-iscsi-ptp-app-map {
    application iSCSI code-points 111;
    application PTP code-points [001 101];
}

```

**Meaning** The **show policy-options application-maps** configuration mode command lists all of the configured application maps and the applications that belong to each application map. The command output shows that there are two application maps, **dcbx-iscsi-fcoe-app-map** and **dcbx-iscsi-ptp-app-map**.

The application map **dcbx-iscsi-fcoe-app-map** consists of the iSCSI application, which is mapped to IEEE 802.1p code point **111**, and the FCoE application, which is mapped to IEEE 802.1p code point **011**.

The application map **dcbx-iscsi-ptp-app-map** consists of the iSCSI application, which is mapped to IEEE 802.1p code point **111**, and the PTP application, which is mapped to IEEE 802.1p code points **001** and **101**.

#### *Verifying DCBX Application Protocol Exchange Interface Configuration*

**Purpose** Verify that the application maps have been applied to the correct interfaces.



**Action** List the application maps by using the configuration mode command **show protocols dcbx**:

```
user@switch# show protocols dcbx
interface xe-0/0/10.0 {
    application-map dcbx-iscsi-fcoe-app-map;
}

interface xe-0/0/11.0 {
    application-map dcbx-iscsi-ptp-app-map;
}
```

**Meaning** The **show protocols dcbx** configuration mode command lists whether the interfaces are enabled for DCBX and lists the application map applied to each interface. The command output shows that interfaces **xe-0/0/10.0** and **xe-0/0/11.0** are enabled for DCBX, and that interface **xe-0/0/10.0** uses application map **dcbx-iscsi-fcoe-app-map**, and interface **xe-0/0/11.0** uses application map **dcbx-iscsi-ptp-app-map**.

#### *Verifying the PFC Configuration*

**Purpose** Verify that PFC has been enabled on the FCoE code point and applied to the correct interface.

**Action** Display the PFC configuration to verify that PFC is enabled on the FCoE code point (011) in the congestion notification profile **fcoe-cnp** by using the configuration mode command **show class-of-service congestion-notification-profile**:

```
user@switch# show class-of-service congestion-notification-profile
fcoe-cnp {
    input {
        ieee-802.1 {
            code-point 011 {
                pfc;
            }
        }
    }
}
```

Display the class-of-service (CoS) interface information to verify that the correct interface has PFC enabled for the FCoE application by using the configuration mode command **show class-of-service interfaces**:

```
user@switch# show class-of-service interfaces
xe-0/0/10 {
    congestion-notification-profile fcoe-cnp;
}
```



**NOTE:** The sample output does not include all of the information this command can show. The output is abbreviated to focus on verifying the PFC configuration.



**Meaning** The `show class-of-service congestion-notification-profile` configuration mode command lists the configured congestion notification profiles. The command output shows that the congestion notification profile `fcoe-cnp` has been configured and has enabled PFC on the IEEE 802.1p code point `011` (the default FCoE code point).

The `show class-of-service interfaces` configuration mode command shows the interface CoS configuration. The command output shows that the congestion notification profile `fcoe-cnp`, which enables PFC on the FCoE code point, is applied to interface `xe-0/0/10`.

### *Verifying the Classifier Configuration*

**Purpose** Verify that the classifiers have been configured and applied to the correct interfaces.

**Action** Display the classifier configuration by using the configuration mode command `show class-of-service`:

```
user@switch# show class-of-service
classifiers {
  ieee-802.1 fcoe-iscsi-cl1 {
    import default;
    forwarding-class network-control {
      loss-priority high code-points 111;
    }
    forwarding-class fcoe {
      loss-priority high code-points 011;
    }
  }
  ieee-802.1 iscsi-ptp-cl2 {
    import default;
    forwarding-class network-control {
      loss-priority low code-points 111;
    }
    forwarding-class best-effort {
      loss-priority low code-points [ 001 101 ];
    }
  }
}
interfaces {
  xe-0/0/10 {
    congestion-notification-profile fcoe-cnp;
    unit 0 {
      classifiers {
        ieee-802.1 fcoe-iscsi-cl1;
      }
    }
  }
  xe-0/0/11 {
    unit 0 {
      classifiers {
        ieee-802.1 iscsi-ptp-cl2;
      }
    }
  }
}
```





**NOTE:** The sample output does not include all of the information this command can show. The output is abbreviated to focus on verifying the classifier configuration.

**Meaning** The **show class-of-service** configuration mode command lists the classifier and CoS interface configuration, as well as other information not shown in this example. The command output shows that there are two classifiers configured, **fcoe-iscsi-cl1** and **iscsi-ptp-cl2**.

Classifier **fcoe-iscsi-cl1** uses the **default** classifier as a template and edits the template as follows:

- The forwarding class **network-control** is set to a loss priority of **high** and is mapped to code point **111** (the code point mapped to the iSCSI application).
- The forwarding class **fcoe** is set to a loss priority of **high** and is mapped to code point **011** (the code point mapped by default to the FCoE application).

Classifier **iscsi-ptp-cl2** uses the **default** classifier as a template and edits the template as follows:

- The forwarding class **network-control** is set to a loss priority of **low** and is mapped to IEEE 802.1p code point **111** (the code point mapped to the iSCSI application).
- The forwarding class **best-effort** is set to a loss priority of **low** and is mapped to IEEE 802.1p code points **001** and **101** (the code points mapped by default to the PTP application).

The command output also shows that classifier **fcoe-iscsi-cl1** is mapped to interface **xe-0/0/10.0** and that classifier **iscsi-ptp-cl2** is mapped to interface **xe-0/0/11.0**.

**Related Documentation**

- [Example: Configuring Unicast Classifiers on page 5014](#)
- [Defining an Application for DCBX Application Protocol TLV Exchange on page 4604](#)
- [Configuring an Application Map for DCBX Application Protocol TLV Exchange on page 4606](#)
- [Applying an Application Map to an Interface for DCBX Application Protocol TLV Exchange on page 4607](#)
- [Configuring DCBX Autonegotiation on page 4601](#)
- [show dcbx on page 4693](#)
- [show dcbx neighbors on page 4694](#)
- [Understanding DCBX Application Protocol TLV Exchange on page 4472](#)
- [Using DCBX Protocol to Lower Costs](#)



## Example: Configuring VN2VN\_Port FIP Snooping (FCoE Hosts Directly Connected to the Same FCoE Transit Switch)

This example shows how to configure VN\_Port to VN\_Port (VN2VN\_Port) FIP snooping when the hosts are directly connected to the same FCoE transit switch.

VN2VN\_Port FIP snooping on an FCoE transit switch provides security to help prevent unauthorized access and data transmission on a bridge that connects ENodes in the Ethernet network. VN2VN\_Port FIP snooping provides security for virtual links by creating filters based on information gathered (snooped) about FCoE devices during FIP transactions.

VN2VN\_Port FIP snooping is conceptually similar to VN2VN\_Port FIP snooping between VN\_Ports and VF\_Ports, but VN2VN\_Port FIP snooping does not require traffic between VN\_Ports to traverse the Fibre Channel (FC) switch or FCoE forwarder (FCF). Instead, a VN\_Port communicates transparently through the transit switch on a virtual link that emulates a direct connection to the VN\_Port at the other end of the virtual link.

To configure VN2VN\_Port FIP snooping when the hosts are directly connected to the same FCoE transit switch, you must follow these configuration rules:

- VN2VN\_Port traffic must use a dedicated FCoE VLAN, and all ENodes that communicate using VN2VN\_Port FIP snooping must use that FCoE VLAN. You cannot mix VN2VN\_Port FIP snooping traffic with VN2VF\_Port FIP snooping traffic in the same FCoE VLAN.



**NOTE:** An FCoE VLAN can support either VN2VF\_Port FIP snooping or VN2VN\_Port FIP snooping, but not both. Configure separate FCoE VLANs for VN2VF\_Port FIP snooping traffic and for VN2VN\_Port FIP snooping traffic. On FCoE VLANs that are configured as VN2VN\_Port FIP snooping VLANs, VN\_Port to VF\_Port (FIP snooping) traffic is dropped.

- ENode-facing ports must be set in **tagged-access** port mode.
- ENode-facing ports must be untrusted ports.
- Network-facing (switch-facing) ports must be set in **trunk** port mode.
- Network-facing ports must be FCoE trusted ports.
- Explicitly configure the beacon period. The beacon period is essentially a keepalive timer for virtual link maintenance.

When you enable VN2VF\_Port FIP snooping, the system snoops VN\_Port to VF\_Port packets and enforces security only on VN\_Port to VF\_Port virtual links. When you enable VN2VN\_Port FIP snooping, the system snoops VN\_Port to VN\_Port packets and enforces security only on VN\_Port to VN\_Port virtual links.

The transit switch applies VN2VN\_Port FIP snooping filters at the ports associated with the FCoE VLANs on which you enable VN2VN FIP snooping.



This example describes how to configure VN2VN\_Port FIP snooping when the FCoE hosts are directly connected to the same transit switch:

- [Requirements on page 4552](#)
- [Overview on page 4552](#)
- [Configuration on page 4553](#)
- [Verification on page 4554](#)

### Requirements

This example uses the following hardware and software components:

- One Juniper Networks QFX3500 Switch used as a transit switch
- Junos OS Release 12.2 or later for the QFX Series
- Two FCoE hosts that have ENodes

### Overview

This example shows you how to:

- Set the correct interface port modes on the transit switch.
- Configure the interfaces to use the dedicated FCoE VLAN for VN2VN\_Port FIP snooping.
- Configure the dedicated FCoE VLAN for VN2VN\_Port FIP snooping traffic.
- Enable VN2VN\_Port FIP snooping on the FCoE VLAN and configure the beacon period.

### Topology

[Table 320 on page 4552](#) shows the configuration components for this example.


**Table 320: Components of the VN2VN\_Port FIP Snooping Configuration Topology (FCoE Hosts Directly Connected to the Same FCoE Transit Switch)**

Component	Settings
Hardware	QFX3500 switch (FCoE transit switch TS1)  Two FCoE hosts that have ENodes (ENode1 and ENode2, respectively)
Interfaces and port modes	<ul style="list-style-type: none"> <li>• Interface <b>xe-0/0/20</b>, port mode <b>tagged-access</b>, connects directly to the FCoE host with ENode1.</li> <li>• Interface <b>xe-0/0/21</b>, port mode <b>tagged-access</b>, connects directly to the FCoE host with ENode2.</li> </ul>
Interface VLAN membership	Both interfaces use VLAN <b>vlan200</b> .
VN2VN_Port FIP snooping VLAN	VLAN name— <b>vlan200</b> VLAN ID—200
FIP snooping mode and beacon period	Set <b>examine-vn2vn</b> (VN2VN_Port FIP snooping) Beacon period—90000 ms



Figure 173 on page 4553 shows the network topology for this example.

**Figure 173: VN2VN\_Port FIP Snooping (FCoE Hosts Connected to Same Transit Switch) Topology**

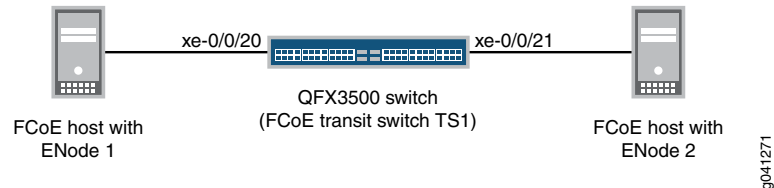

### Configuration

#### CLI Quick Configuration

To quickly configure VN2VN\_Port FIP snooping for FCoE hosts connected directly to the same transit switch, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level:

```
set interfaces xe-0/0/20 unit 0 family ethernet-switching port-mode tagged-access
set interfaces xe-0/0/21 unit 0 family ethernet-switching port-mode tagged-access
set interfaces xe-0/0/20 unit 0 family ethernet-switching vlan members vlan200
set interfaces xe-0/0/21 unit 0 family ethernet-switching vlan members vlan200
set vlans vlan200 vlan-id 200
set ethernet-switching-options secure-access-port vlan vlan200 examine-fip examine-vn2v2
beacon-period 90000
```

#### *Configuring VN2VN\_Port FIP Snooping (FCoE Hosts Directly Connected to the Same FCoE Transit Switch)*

#### Step-by-Step Procedure

To configure interface port modes, configure interface VLAN membership in the FCoE VLAN dedicated to VN2VN\_Port traffic, configure the VLAN, set the beacon period, and enable VN2VN\_Port FIP snooping:

1. Configure the port modes of the interfaces that connect directly to the FCoE host ENodes:  

```
user@switch# set interfaces xe-0/0/20 unit 0 family ethernet-switching port-mode tagged-access
set interfaces xe-0/0/21 unit 0 family ethernet-switching port-mode tagged-access
```
2. Configure the interface VLAN membership so that the interfaces connected to the ENodes are members of the dedicated VN2VN\_Port VLAN (vlan200):  

```
user@switch# set interfaces xe-0/0/20 unit 0 family ethernet-switching vlan members vlan200
set interfaces xe-0/0/21 unit 0 family ethernet-switching vlan members vlan200
```
3. Configure the FCoE VLAN dedicated to VN2VN\_Port FIP snooping:  

```
user@switch# set vlans vlan200 vlan-id 200
```
4. Enable VN2VN\_Port FIP snooping on the VLAN and configure the beacon period:  

```
user@switch# set ethernet-switching-options secure-access-port vlan vlan200 examine-fip examine-vn2v2 beacon-period 90000
```



## Verification

---

To verify that the VN2VN\_Port FIP snooping configuration has been created and is operating properly, perform these tasks:

- [Verifying That VN2VN\\_Port FIP Snooping is Enabled on the FCoE VLAN on page 4554](#)
- [Verifying the Interface Port Mode on page 4555](#)

### *Verifying That VN2VN\_Port FIP Snooping is Enabled on the FCoE VLAN*

**Purpose** Verify that VN2VN\_Port FIP snooping is enabled on the correct VLAN (**vlan200**), the beacon period is set to **90000** milliseconds, and the correct interfaces (**xe-0/0/20** and **xe-0/0/21**) are members of the VLAN.

**Action** List the FIP snooping information using the operational mode command **show fip snooping detail**.

```
user@switch> show fip snooping detail
VLAN: vlan200, Mode: VN2VN Snooping
FC-MAP: 0e:fc:00
Beacon_Period: 90000
VN2VN Mode: Point-to-Point
  Enode Information
    Enode-MAC: 10:10:94:01:00:02,      Interface: xe-0/0/20
    Active VN_Ports : 1
  VN_Port Information
    VN-Port MAC: 0e:fc:00:01:0a:01
    Active Sessions : 1
  Session Information
    Vlink far-end VN-Port-MAC: 0e:fc:00:01:0b:01
    Enode-MAC: 10:10:94:01:00:02,      Interface: xe-0/0/21
    Active VN_Ports : 1
  VN_Port Information
    VN-Port MAC: 0e:fc:00:01:0b:01
    Active Sessions : 1
  Session Information
    Vlink far-end VN-Port-MAC: 0e:fc:00:01:0a:01
```

**Meaning** The **show fip snooping detail** command lists all of the transit switch information about VN2VN\_Port FIP snooping and VN2VF\_Port FIP snooping. The command shows that:

- The VLAN is **vlan200**.
- The mode is FIP snooping mode **VN2VN**, for VN2VN\_Port FIP snooping. (If the Mode field shows **VN2VF**, then the FIP snooping mode is VN2VF\_Port FIP snooping.)
- The beacon period is **90000**.
- The interfaces for the ENodes are **xe-0/0/20** and **xe-0/0/21**.

In addition, this useful command shows information about the ENodes and the VN2VN\_Port sessions.



**Verifying the Interface Port Mode**

**Purpose** Verify that the interface port modes are **tagged-access**.

**Action** List the Ethernet switching interfaces to confirm the port mode using the **show ethernet-switching interfaces detail** operational command.

Use the operational mode commands **show ethernet-switching interfaces xe-0/0/20.0 detail** and **show ethernet-switching interfaces xe-0/0/21.0 detail** to list the Ethernet switching interface information. The output is truncated to show only the relevant portions:

```
user@switch> show ethernet-switching interfaces xe-0/0/20.0 detail
Interface: xe-0/0/20.0, Index: 75, State: up, Port mode: Tagged-Access
.
.
.

user@switch> show ethernet-switching interfaces xe-0/0/21.0 detail
Interface: xe-0/0/21.0, Index: 83, State: up, Port mode: Tagged-Access
.
.
.
```

**Meaning** The **show ethernet-switching interfaces detail** command lists the port mode as **tagged-access** for both interfaces.

- Related Documentation**
- [Example: Configuring VN2VN\\_Port FIP Snooping \(FCoE Hosts Directly Connected to Different FCoE Transit Switches\) on page 4555](#)
  - [Example: Configuring VN2VN\\_Port FIP Snooping \(FCoE Hosts Indirectly Connected Through an Aggregation Layer FCoE Transit Switch\) on page 4563](#)
  - [Enabling VN2VN\\_Port FIP Snooping and Configuring the Beacon Period on an FCoE Transit Switch on page 4599](#)
  - [Understanding VN\\_Port to VN\\_Port FIP Snooping on an FCoE Transit Switch on page 4454](#)

### Example: Configuring VN2VN\_Port FIP Snooping (FCoE Hosts Directly Connected to Different FCoE Transit Switches)

This example shows how to configure VN\_Port to VN\_Port (VN2VN\_Port) FIP snooping when the hosts are directly connected to different FCoE transit switches, and the transit switches are directly connected to each other.

VN2VN\_Port FIP snooping on an FCoE transit switch provides security to help prevent unauthorized access and data transmission on a bridge that connects ENodes in the Ethernet network. VN2VN\_Port FIP snooping provides security for virtual links by creating filters based on information gathered (snooped) about FCoE devices during FIP transactions.

VN2VN\_Port FIP snooping is conceptually similar to VN2VF\_Port FIP snooping between VN\_Ports and VF\_Ports, but VN2VN\_Port FIP snooping does not require traffic between VN\_Ports to traverse the Fibre Channel (FC) switch or FCoE forwarder (FCF). Instead, a



VN\_Port communicates transparently through one or more transit switches on a virtual link that emulates a direct connection to the VN\_Port at the other end of the virtual link.

To configure VN2VN\_Port FIP snooping when the hosts are directly connected to different FCoE transit switches, and the transit switches are directly connected to each other, you must follow these configuration rules:

- VN2VN\_Port traffic must use a dedicated FCoE VLAN, and all ENodes that communicate using VN2VN\_Port FIP snooping must use that FCoE VLAN. The FCoE VLAN must be configured on each transit switch. You cannot mix VN2VN\_Port FIP snooping traffic with VN2VF\_Port FIP snooping traffic in the same FCoE VLAN.



**NOTE:** An FCoE VLAN can support either VN2VF\_Port FIP snooping or VN2VN\_Port FIP snooping, but not both. Configure separate FCoE VLANs for VN2VF\_Port FIP snooping traffic and for VN2VN\_Port FIP snooping traffic. On FCoE VLANs that are configured as VN2VN\_Port FIP snooping VLANs, VN2VF\_Port traffic is dropped.

- ENode-facing ports must be set in **tagged-access** port mode.
- ENode-facing ports must be untrusted ports.
- Network-facing (switch-facing) ports must be set in **trunk** port mode.
- Network-facing ports must be FCoE trusted ports.
- Explicitly configure the beacon period. The beacon period is essentially a keepalive timer for virtual link maintenance.

When you enable VN2VF\_Port FIP snooping, the system snoops VN\_Port to VF\_Port packets and enforces security only on VN\_Port to VF\_Port virtual links. When you enable VN2VN\_Port FIP snooping, the system snoops VN\_Port to VN\_Port packets and enforces security only on VN\_Port to VN\_Port virtual links.

The transit switch applies VN2VN\_Port FIP snooping filters at the ports associated with the FCoE VLANs on which you enable VN2VN FIP snooping.

This example describes how to configure VN2VN\_Port FIP snooping when the FCoE hosts are directly connected to different transit switches, and the transit switches are directly connected to each other:

- [Requirements on page 4556](#)
- [Overview on page 4557](#)
- [Configuration on page 4558](#)
- [Verification on page 4560](#)

---

## Requirements

This example uses the following hardware and software components:

- Two Juniper Networks QFX3500 Switches used as transit switches



- Junos OS Release 12.2 or later for the QFX Series
- Two FCoE hosts that have ENodes

### Overview

This example shows you how to:

- Set the correct interface port modes on the transit switch.
- Configure the interfaces to use the dedicated FCoE VLAN for VN2VN\_Port FIP snooping.
- Configure the network-facing interfaces as FCoE trusted interfaces.
- Configure the dedicated FCoE VLAN for VN2VN\_Port FIP snooping traffic.
- Enable VN2VN\_Port FIP snooping on the FCoE VLAN and configure the beacon period.

### Topology


Table 321 on page 4557 shows the configuration components for this example.

**Table 321: Components of the VN2VN\_Port FIP Snooping Configuration Topology (FCoE Hosts Directly Connected to Different FCoE Transit Switches)**

Component	Settings
Hardware	Two QFX3500 switches (FCoE transit switch TS1 and FCoE transit switch TS2)  Two FCoE hosts that have ENodes (ENode1 and ENode2, respectively)
Interfaces and port modes	<ul style="list-style-type: none"> <li>• Interface <b>xe-0/0/20</b>, port mode <b>tagged-access</b>, connects directly from transit switch TS1 to the FCoE host with ENode1.</li> <li>• Interface <b>xe-0/0/21</b>, port mode <b>trunk</b>, connects directly from transit switch TS1 to transit switch TS2.</li> <li>• Interface <b>xe-0/0/31</b>, port mode <b>trunk</b>, connects directly from transit switch TS2 to transit switch TS1.</li> <li>• Interface <b>xe-0/0/30</b>, port mode <b>tagged-access</b>, connects directly from transit switch TS2 to the FCoE host with ENode2.</li> </ul>
Interface VLAN membership	The interfaces on both transit switches use VLAN <b>vlan200</b> .
VN2VN_Port FIP snooping VLAN	VLAN name (both transit switches)— <b>vlan200</b> VLAN ID—200
FIP snooping mode and beacon period	Set <b>examine-vn2vn</b> (VN2VN_Port FIP snooping) Beacon period—90000 ms

Figure 174 on page 4558 shows the network topology for this example.

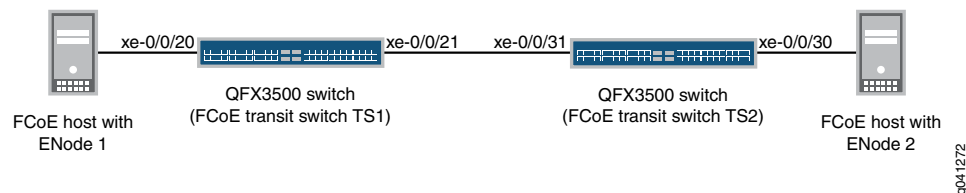

**Figure 174: VN2VN\_Port FIP Snooping (FCoE Hosts Connected to Different Transit Switches) Topology**

### Configuration

To configure VN2VN\_Port FIP snooping for VN\_Ports that are directly connected to different transit switches (and the transit switches are directly connected to each other), perform these tasks:

- [Configuring VN2VN\\_Port FIP Snooping on FCoE Transit Switch TS1 on page 4559](#)
- [Configuring VN2VN\\_Port FIP Snooping on FCoE Transit Switch TS2 on page 4559](#)

#### CLI Quick Configuration

The configuration for each FCoE transit switch is shown separately.

To quickly configure VN2VN\_Port FIP snooping for FCoE hosts connected directly to different transit switches, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level. To configure FCoE transit switch TS1:

```
set interfaces xe-0/0/20 unit 0 family ethernet-switching port-mode tagged-access
set interfaces xe-0/0/21 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/20 unit 0 family ethernet-switching vlan members vlan200
set interfaces xe-0/0/21 unit 0 family ethernet-switching vlan members vlan200
set ethernet-switching-options secure-access-port interface xe-0/0/21 fcoe-trusted
set vlans vlan200 vlan-id 200
set ethernet-switching-options secure-access-port vlan vlan200 examine-fip examine-vn2v2
beacon-period 90000
```

To quickly configure VN2VN\_Port FIP snooping for FCoE hosts connected directly to different transit switches, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level. To configure FCoE transit switch TS2:

```
set interfaces xe-0/0/30 unit 0 family ethernet-switching port-mode tagged-access
set interfaces xe-0/0/31 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/30 unit 0 family ethernet-switching vlan members vlan200
set interfaces xe-0/0/31 unit 0 family ethernet-switching vlan members vlan200
set vlans vlan200 vlan-id 200
set ethernet-switching-options secure-access-port interface xe-0/0/31 fcoe-trusted
set ethernet-switching-options secure-access-port vlan vlan200 examine-fip examine-vn2v2
beacon-period 90000
```



**Configuring VN2VN\_Port FIP Snooping on FCoE Transit Switch TS1**

- Step-by-Step Procedure** To configure interface port modes, configure interface VLAN membership in the FCoE VLAN dedicated to VN2VN\_Port traffic, set the network-facing port as FCoE trusted, configure the VLAN, set the beacon period, and enable VN2VN\_Port FIP snooping:
1. Configure the port modes of the interfaces that connect directly to the FCoE host with ENode1 (xe-0/0/20) and to FCoE transit switch TS2 (xe-0/0/21):
 

```
user@switch# set interfaces xe-0/0/20 unit 0 family ethernet-switching port-mode tagged-access
set interfaces xe-0/0/21 unit 0 family ethernet-switching port-mode trunk
```
  2. Configure the interface VLAN membership so that the interfaces are members of the dedicated VN2VN\_Port VLAN (vlan200):
 

```
user@switch# set interfaces xe-0/0/20 unit 0 family ethernet-switching vlan members vlan200
set interfaces xe-0/0/21 unit 0 family ethernet-switching vlan members vlan200
```
  3. Configure the network-facing port (xe-0/0/21) as an FCoE trusted port:
 

```
user@switch# set ethernet-switching-options secure-access-port interface xe-0/0/21 fcoe-trusted
```
  4. Configure the FCoE VLAN dedicated to VN2VN\_Port FIP snooping:
 

```
user@switch# set vlans vlan200 vlan-id 200
```
  5. Enable VN2VN\_Port FIP snooping on the VLAN and configure the beacon period:
 

```
user@switch# set ethernet-switching-options secure-access-port vlan vlan200 examine-fip examine-vn2v2 beacon-period 90000
```

**Configuring VN2VN\_Port FIP Snooping on FCoE Transit Switch TS2**

- Step-by-Step Procedure** To configure interface port modes, configure interface VLAN membership in the FCoE VLAN dedicated to VN2VN\_Port traffic, set the network-facing port as FCoE trusted, configure the VLAN, set the beacon period, and enable VN2VN\_Port FIP snooping:
1. Configure the port modes of the interfaces that connect directly to the FCoE host with ENode2 (xe-0/0/30) and to FCoE transit switch TS1 (xe-0/0/31):
 

```
user@switch# set interfaces xe-0/0/30 unit 0 family ethernet-switching port-mode tagged-access
set interfaces xe-0/0/31 unit 0 family ethernet-switching port-mode trunk
```
  2. Configure the interface VLAN membership so that the interfaces are members of the dedicated VN2VN\_Port VLAN (vlan200):
 

```
user@switch# set interfaces xe-0/0/30 unit 0 family ethernet-switching vlan members vlan200
set interfaces xe-0/0/31 unit 0 family ethernet-switching vlan members vlan200
```
  3. Configure the network-facing port (xe-0/0/31) as an FCoE trusted port:
 

```
user@switch# set ethernet-switching-options secure-access-port interface xe-0/0/31 fcoe-trusted
```
  4. Configure the FCoE VLAN dedicated to VN2VN\_Port FIP snooping:
 

```
user@switch# set vlans vlan200 vlan-id 200
```



5. Enable VN2VN\_Port FIP snooping on the VLAN and configure the beacon period:

```
user@switch# set ethernet-switching-options secure-access-port vlan vlan200 examine-fip  
examine-vn2v2 beacon-period 90000
```

---

### Verification

To verify that the VN2VN\_Port FIP snooping configuration has been created and is operating properly on both switches, perform these tasks:

- [Verifying That VN2VN\\_Port FIP Snooping is Enabled on the FCoE VLAN \(Transit Switches TS1 and TS2\) on page 4560](#)
- [Verifying the Interface Port Mode on page 4562](#)

***Verifying That VN2VN\_Port FIP Snooping is Enabled on the FCoE VLAN (Transit Switches TS1 and TS2)***

**Purpose** Verify that VN2VN\_Port FIP snooping is enabled on the correct VLAN (**vlan200**), the beacon period is set to **90000** milliseconds, and that the correct interfaces (**xe-0/0/20** and **xe-0/0/21** on TS1, and **xe-0/0/30** and **xe-0/0/31** on TS2) are members of the VLAN.



**Action** List the FIP snooping information on transit switch TS1 using the operational mode command **show fip snooping detail**

```
user@switch> show fip snooping detail
VLAN: vlan200, Mode: VN2VN Snooping
FC-MAP: 0e:fc:00
Beacon_Period: 90000
VN2VN Mode: Point-to-Point
  Enode Information
    Enode-MAC: 10:10:94:01:00:02,      Interface: xe-0/0/20
    Active VN_Ports : 1
    VN_Port Information
      VN-Port MAC: 0e:fc:00:01:0a:01
      Active Sessions : 1
      Session Information
        Vlink far-end VN-Port-MAC: 0e:fc:00:01:0b:01
    Enode-MAC: 10:10:94:01:00:02,      Interface: xe-0/0/21
    Active VN_Ports : 1
    VN_Port Information
      VN-Port MAC: 0e:fc:00:01:0b:01
      Active Sessions : 1
      Session Information
        Vlink far-end VN-Port-MAC: 0e:fc:00:01:0a:01
```

List the FIP snooping information on transit switch TS2 using the operational mode command **show fip snooping detail**

```
user@switch> show fip snooping detail
VLAN: vlan200, Mode: VN2VN Snooping
FC-MAP: 0e:fc:00
Beacon_Period: 90000
VN2VN Mode: Point-to-Point
  Enode Information
    Enode-MAC: 10:10:94:01:00:02,      Interface: xe-0/0/30
    Active VN_Ports : 1
    VN_Port Information
      VN-Port MAC: 0e:fc:00:01:0b:01
      Active Sessions : 1
      Session Information
        Vlink far-end VN-Port-MAC: 0e:fc:00:01:0a:01
    Enode-MAC: 10:10:94:01:00:02,      Interface: xe-0/0/31
    Active VN_Ports : 1
    VN_Port Information
      VN-Port MAC: 0e:fc:00:01:0a:01
      Active Sessions : 1
      Session Information
        Vlink far-end VN-Port-MAC: 0e:fc:00:01:0b:01
```

**Meaning** The **show fip snooping detail** command lists all of the transit switch information about VN2VN\_Port FIP snooping and VN2VF\_Port FIP snooping on each transit switch. The command shows that:

- The VLAN is **vlan200**.
- The mode is FIP snooping mode **VN2VN**, for VN2VN\_Port FIP snooping. (If the Mode field shows **VN2VF**, then the FIP snooping mode is VN2VF\_Port FIP snooping.)



- The beacon period is **90000**.
- The interfaces connected to the ENodes are **xe-0/0/20** and **xe-0/0/21** on transit switch TS1, and **xe-0/0/30** and **xe-0/0/31** on transit switch TS2. Because the transit switches are transparent passthrough switches, the network-facing trunk ports “see” the FCoE host ENodes at the far end of the VN2VN\_Port virtual link.

In addition, this useful command shows information about the ENodes and the VN2VN\_Port sessions.

### ***Verifying the Interface Port Mode***

**Purpose** Verify that the interface port modes are **tagged-access** for ENode-facing ports and **trunk** for network-facing ports on each transit switch.

**Action** List the Ethernet switching interfaces to confirm the port mode using the **show ethernet-switching interfaces detail** operational command.

Use the operational mode commands **show ethernet-switching interfaces xe-0/0/20.0 detail** and **show ethernet-switching interfaces xe-0/0/21.0 detail** to list the Ethernet switching interface information on FCoE transit switch TS1. The output is truncated to show only the relevant portions:

```
user@switch> show ethernet-switching interfaces xe-0/0/20.0 detail
Interface: xe-0/0/20.0, Index: 75, State: up, Port mode: Tagged-Access
.
.
.
```

```
user@switch> show ethernet-switching interfaces xe-0/0/21.0 detail
Interface: xe-0/0/21.0, Index: 83, State: up, Port mode: Trunk
.
.
.
```

List the Ethernet switching interface information on FCoE transit switch TS2 using the operational mode commands **show ethernet-switching interfaces xe-0/0/30.0 detail** and **show ethernet-switching interfaces xe-0/0/31.0 detail**:

```
user@switch> show ethernet-switching interfaces xe-0/0/30.0 detail
Interface: xe-0/0/30.0, Index: 56, State: up, Port mode: Tagged-Access
.
.
.
```

```
user@switch> show ethernet-switching interfaces xe-0/0/31.0 detail
Interface: xe-0/0/31.0, Index: 59, State: up, Port mode: Trunk
.
.
.
```

- Related Documentation**
- [Example: Configuring VN2VN\\_Port FIP Snooping \(FCoE Hosts Directly Connected to the Same FCoE Transit Switch\)](#) on page 4551
  - [Example: Configuring VN2VN\\_Port FIP Snooping \(FCoE Hosts Indirectly Connected Through an Aggregation Layer FCoE Transit Switch\)](#) on page 4563



- [Enabling VN2VN\\_Port FIP Snooping and Configuring the Beacon Period on an FCoE Transit Switch on page 4599](#)
- [Understanding VN\\_Port to VN\\_Port FIP Snooping on an FCoE Transit Switch on page 4454](#)

### Example: Configuring VN2VN\_Port FIP Snooping (FCoE Hosts Indirectly Connected Through an Aggregation Layer FCoE Transit Switch)

This example shows how to configure VN\_Port to VN\_Port (VN2VN\_Port) FIP snooping when the hosts are indirectly connected through an aggregation layer FCoE transit switch. Each FCoE host ENode is directly connected to an FCoE transit switch, but the FCoE transit switches are not directly connected to each other. The FCoE transit switches are both connected to a third FCoE transit switch that acts as an aggregation layer switch.

VN2VN\_Port FIP snooping on an FCoE transit switch provides security to help prevent unauthorized access and data transmission on a bridge that connects ENodes in the Ethernet network. VN2VN\_Port FIP snooping provides security for virtual links by creating filters based on information gathered (snooped) about FCoE devices during FIP transactions.

VN2VN\_Port FIP snooping is conceptually similar to VN2VN\_Port FIP snooping between VN\_Ports and VF\_Ports, but VN2VN\_Port FIP snooping does not require traffic between VN\_Ports to traverse the Fibre Channel (FC) switch or FCoE forwarder (FCF). Instead, a VN\_Port communicates transparently through one or more transit switches on a virtual link that emulates a direct connection to the VN\_Port at the other end of the virtual link.

To configure VN2VN\_Port FIP snooping when the hosts are indirectly connected, you must follow these configuration rules:

- VN2VN\_Port traffic must use a dedicated FCoE VLAN, and all ENodes that communicate using VN2VN\_Port FIP snooping must use that FCoE VLAN. The FCoE VLAN must be configured on each transit switch. You cannot mix VN2VN\_Port FIP snooping traffic with VN2VF\_Port FIP snooping traffic in the same FCoE VLAN.



**NOTE:** An FCoE VLAN can support either VN2VF\_Port FIP snooping or VN2VN\_Port FIP snooping, but not both. Configure separate FCoE VLANs for VN2VF\_Port FIP snooping traffic and for VN2VN\_Port FIP snooping traffic. On FCoE VLANs that are configured as VN2VN\_Port FIP snooping VLANs, VN\_Port to VF\_Port traffic is dropped.

- ENode-facing ports must be set in **tagged-access** port mode.
- ENode-facing ports must be untrusted ports.
- Network-facing (switch-facing) ports must be set in **trunk** port mode.
- Network-facing ports must be FCoE trusted ports.
- Explicitly configure the beacon period. The beacon period is essentially a keepalive timer for virtual link maintenance.



When you enable FIP snooping, the system snoops VN\_Port to VF\_Port packets and enforces security only on VN\_Port to VF\_Port virtual links. When you enable VN2VN\_Port FIP snooping, the system snoops VN\_Port to VN\_Port packets and enforces security only on VN\_Port to VN\_Port virtual links.

The transit switch applies VN2VN\_Port FIP snooping filters at the ports associated with the FCoE VLANs on which you enable VN2VN FIP snooping.

This example describes how to configure VN2VN\_Port FIP snooping when the FCoE hosts are indirectly connected across an aggregation layer FCoE transit switch:

- [Requirements on page 4564](#)
- [Overview on page 4564](#)
- [Configuration on page 4565](#)
- [Verification on page 4568](#)

### Requirements

This example uses the following hardware and software components:

- Three Juniper Networks QFX3500 Switches used as transit switches
- Junos OS Release 12.2 or later for the QFX Series
- Two FCoE hosts that have ENodes

### Overview

This example shows you how to:

- Set the correct interface port modes on the transit switch.
- Configure the interfaces to use the dedicated FCoE VLAN for VN2VN\_Port FIP snooping.
- Configure the network-facing interfaces as FCoE trusted interfaces.
- Configure the dedicated FCoE VLAN for VN2VN\_Port FIP snooping traffic.
- Enable VN2VN\_Port FIP snooping on the FCoE VLAN and configure the beacon period.

### Topology

[Table 322 on page 4564](#) shows the configuration components for this example.

**Table 322: Components of the VN2VN\_Port FIP Snooping Configuration Topology (FCoE Hosts Indirectly Connected Across an Aggregation Layer FCoE Transit Switch)**

Component	Settings
Hardware	<p>Three QFX3500 switches, two of which are FCoE transit switches that are directly attached to the FCoE hosts (transit switches TS1 and TS2) and one of which is an aggregation layer FCoE transit switch (TS3)</p> <p>Two FCoE hosts that have ENodes (ENode1 and ENode2, respectively)</p>




**Table 322: Components of the VN2VN\_Port FIP Snooping Configuration Topology (FCoE Hosts Indirectly Connected Across an Aggregation Layer FCoE Transit Switch) (*continued*)**

Component	Settings
Interfaces and port modes	<ul style="list-style-type: none"> <li>Interface <b>xe-0/0/20</b>, port mode <b>tagged-access</b>, connects directly from transit switch TS1 to the FCoE host with ENode1.</li> <li>Interface <b>xe-0/0/21</b>, port mode <b>trunk</b>, connects directly from transit switch TS1 to aggregation layer transit switch TS2.</li> <li>Interface <b>xe-0/0/31</b>, port mode <b>trunk</b>, connects directly from aggregation layer transit switch TS2 to transit switch TS1.</li> <li>Interface <b>xe-0/0/30</b>, port mode <b>trunk</b>, connects directly from aggregation layer transit switch TS2 to transit switch TS3.</li> <li>Interface <b>xe-0/0/11</b>, port mode <b>trunk</b>, connects directly from transit switch TS3 to aggregation layer transit switch TS2.</li> <li>Interface <b>xe-0/0/10</b>, port mode <b>tagged-access</b>, connects directly from transit switch TS3 to the FCoE host with ENode2.</li> </ul>
Interface VLAN membership	The interfaces on all three switches use VLAN <b>vlan200</b> .
VN2VN_Port FIP snooping VLAN	VLAN name (all three switches)— <b>vlan200</b> VLAN ID—200
FIP snooping mode and beacon period	Set <b>examine-vn2vn</b> (VN2VN_Port FIP snooping) Beacon period—90000 ms

Figure 175 on page 4565 shows the network topology for this example.

**Figure 175: VN2VN\_Port FIP Snooping (FCoE Hosts Indirectly Connected) Topology**

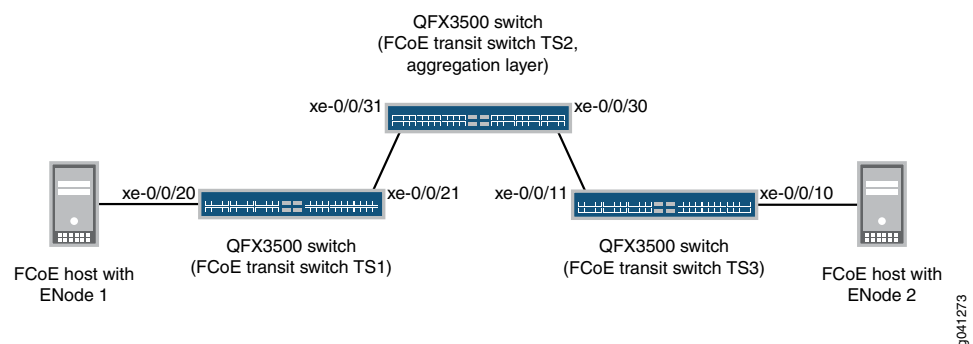

### Configuration

To configure VN2VN\_Port FIP snooping for VN\_Ports that are indirectly connected across an aggregation layer FCoE transit switch, perform these tasks:

- [Configuring VN2VN\\_Port FIP Snooping on FCoE Transit Switch TS1 on page 4567](#)
- [Configuring VN2VN\\_Port FIP Snooping on Aggregation Layer FCoE Transit Switch TS2 on page 4567](#)
- [Configuring VN2VN\\_Port FIP Snooping on FCoE Transit Switch TS3 on page 4568](#)



**CLI Quick  
Configuration**

The configuration for each FCoE transit switch is shown separately.

To quickly configure VN2VN\_Port FIP snooping for FCoE hosts that are indirectly connected across an aggregation layer FCoE transit switch, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level. To configure FCoE transit switch TS1:

```
set interfaces xe-0/0/20 unit 0 family ethernet-switching port-mode tagged-access
set interfaces xe-0/0/21 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/20 unit 0 family ethernet-switching vlan members vlan200
set interfaces xe-0/0/21 unit 0 family ethernet-switching vlan members vlan200
set ethernet-switching-options secure-access-port interface xe-0/0/21 fcoe-trusted
set vlans vlan200 vlan-id 200
set ethernet-switching-options secure-access-port vlan vlan200 examine-fip examine-vn2v2
beacon-period 90000
```

To quickly configure VN2VN\_Port FIP snooping for FCoE hosts that are indirectly connected across an aggregation layer FCoE transit switch, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level. To configure FCoE transit switch TS2:

```
set interfaces xe-0/0/30 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/31 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/30 unit 0 family ethernet-switching vlan members vlan200
set interfaces xe-0/0/31 unit 0 family ethernet-switching vlan members vlan200
set vlans vlan200 vlan-id 200
set ethernet-switching-options secure-access-port interface xe-0/0/30 fcoe-trusted
set ethernet-switching-options secure-access-port interface xe-0/0/31 fcoe-trusted
set ethernet-switching-options secure-access-port vlan vlan200 examine-fip examine-vn2v2
beacon-period 90000
```

To quickly configure VN2VN\_Port FIP snooping for FCoE hosts that are indirectly connected across an aggregation layer FCoE transit switch, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level. To configure FCoE transit switch TS3:

```
set interfaces xe-0/0/10 unit 0 family ethernet-switching port-mode tagged-access
set interfaces xe-0/0/11 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/10 unit 0 family ethernet-switching vlan members vlan200
set interfaces xe-0/0/11 unit 0 family ethernet-switching vlan members vlan200
set vlans vlan200 vlan-id 200
set ethernet-switching-options secure-access-port interface xe-0/0/11 fcoe-trusted
set ethernet-switching-options secure-access-port vlan vlan200 examine-fip examine-vn2v2
beacon-period 90000
```



**Configuring VN2VN\_Port FIP Snooping on FCoE Transit Switch TS1**

- Step-by-Step Procedure** To configure interface port modes, configure interface VLAN membership in the FCoE VLAN dedicated to VN2VN\_Port traffic, set the network-facing port as FCoE trusted, configure the VLAN, set the beacon period, and enable VN2VN\_Port FIP snooping:
1. Configure the port modes of the interfaces that connect directly to the FCoE host with ENode1 (**xe-0/0/20**) and to aggregation layer FCoE transit switch TS2 (**xe-0/0/21**):
 

```
user@switch# set interfaces xe-0/0/20 unit 0 family ethernet-switching port-mode tagged-access
set interfaces xe-0/0/21 unit 0 family ethernet-switching port-mode trunk
```
  2. Configure the interface VLAN membership so that the interfaces are members of the dedicated VN2VN\_Port VLAN (**vlan200**):
 

```
user@switch# set interfaces xe-0/0/20 unit 0 family ethernet-switching vlan members vlan200
set interfaces xe-0/0/21 unit 0 family ethernet-switching vlan members vlan200
```
  3. Configure the network-facing port (**xe-0/0/21**) as an FCoE trusted port:
 

```
user@switch# set ethernet-switching-options secure-access-port interface xe-0/0/21 fcoe-trusted
```
  4. Configure the FCoE VLAN dedicated to VN2VN\_Port FIP snooping:
 

```
user@switch# set vlans vlan200 vlan-id 200
```
  5. Enable VN2VN\_Port FIP snooping on the VLAN and configure the beacon period:
 

```
user@switch# set ethernet-switching-options secure-access-port vlan vlan200 examine-fip examine-vn2v2 beacon-period 90000
```

**Configuring VN2VN\_Port FIP Snooping on Aggregation Layer FCoE Transit Switch TS2**

- Step-by-Step Procedure** To configure interface port modes, configure interface VLAN membership in the FCoE VLAN dedicated to VN2VN\_Port traffic, set the network-facing ports as FCoE trusted, configure the VLAN, set the beacon period, and enable VN2VN\_Port FIP snooping:
1. Configure the port modes of the interfaces that connect directly to FCoE transit switches TS1 (**xe-0/0/31**) and TS3 (**xe-0/0/30**). Both interfaces are network-facing and must be configured as trunk interfaces:
 

```
user@switch# set interfaces xe-0/0/30 unit 0 family ethernet-switching port-mode trunk
set interfaces xe-0/0/31 unit 0 family ethernet-switching port-mode trunk
```
  2. Configure the interface VLAN membership so that the interfaces are members of the dedicated VN2VN\_Port VLAN (**vlan200**):
 

```
user@switch# set interfaces xe-0/0/30 unit 0 family ethernet-switching vlan members vlan200
set interfaces xe-0/0/31 unit 0 family ethernet-switching vlan members vlan200
```
  3. Configure the network-facing ports (**xe-0/0/30** and **xe-0/0/31**) as FCoE trusted ports:
 

```
user@switch# set ethernet-switching-options secure-access-port interface xe-0/0/30 fcoe-trusted
```



```
user@switch# set ethernet-switching-options secure-access-port interface xe-0/0/31
fcoe-trusted
```

4. Configure the FCoE VLAN dedicated to VN2VN\_Port FIP snooping:

```
user@switch# set vlans vlan200 vlan-id 200
```

5. Enable VN2VN\_Port FIP snooping on the VLAN and configure the beacon period:

```
user@switch# set ethernet-switching-options secure-access-port vlan vlan200 examine-fip
examine-vn2v2 beacon-period 90000
```

### *Configuring VN2VN\_Port FIP Snooping on FCoE Transit Switch TS3*

#### **Step-by-Step Procedure**

To configure interface port modes, configure interface VLAN membership in the FCoE VLAN dedicated to VN2VN\_Port traffic, set the network-facing port as FCoE trusted, configure the VLAN, set the beacon period, and enable VN2VN\_Port FIP snooping:

1. Configure the port modes of the interfaces that connect directly to the FCoE host with ENode2 (xe-0/0/10) and to aggregation layer FCoE transit switch TS2 (xe-0/0/11):

```
user@switch# set interfaces xe-0/0/10 unit 0 family ethernet-switching port-mode
tagged-access
set interfaces xe-0/0/11 unit 0 family ethernet-switching port-mode trunk
```

2. Configure the interface VLAN membership so that the interfaces are members of the dedicated VN2VN\_Port VLAN (vlan200):

```
user@switch# set interfaces xe-0/0/10 unit 0 family ethernet-switching vlan members
vlan200
set interfaces xe-0/0/11 unit 0 family ethernet-switching vlan members vlan200
```

3. Configure the network-facing port (xe-0/0/11) as an FCoE trusted port:

```
user@switch# set ethernet-switching-options secure-access-port interface xe-0/0/11
fcoe-trusted
```

4. Configure the FCoE VLAN dedicated to VN2VN\_Port FIP snooping:

```
user@switch# set vlans vlan200 vlan-id 200
```

5. Enable VN2VN\_Port FIP snooping on the VLAN and configure the beacon period:

```
user@switch# set ethernet-switching-options secure-access-port vlan vlan200 examine-fip
examine-vn2v2 beacon-period 90000
```

---

### **Verification**

To verify that the VN2VN\_Port FIP snooping configuration has been created and is operating properly on all three switches, perform these tasks:

- [Verifying That VN2VN\\_Port FIP Snooping Is Enabled on the FCoE VLAN \(All Three Transit Switches\)](#) on page 4568
- [Verifying the Interface Port Mode](#) on page 4571

#### ***Verifying That VN2VN\_Port FIP Snooping Is Enabled on the FCoE VLAN (All Three Transit Switches)***

**Purpose** Verify that VN2VN\_Port FIP snooping is enabled on the correct VLAN (vlan200), the beacon period is set to 90000 milliseconds, and that the correct interfaces (xe-0/0/20



and **xe-0/0/21** on TS1, **xe-0/0/30** and **xe-0/0/31** aggregation layer TS2, and **xe-0/0/10** and **xe-0/0/11** on TS3) are members of the VLAN.



**Action** List the FIP snooping information on transit switch TS1 using the operational mode command **show fip snooping detail**

```
user@switch> show fip snooping detail
VLAN: vlan200, Mode: VN2VN Snooping
FC-MAP: 0e:fc:00
Beacon_Period: 90000
VN2VN Mode: Point-to-Point
  Enode Information
    Enode-MAC: 10:10:94:01:00:02,      Interface: xe-0/0/20
    Active VN_Ports : 1
    VN_Port Information
      VN-Port MAC: 0e:fc:00:01:0a:01
      Active Sessions : 1
      Session Information
        Vlink far-end VN-Port-MAC: 0e:fc:00:01:0b:01
    Enode-MAC: 10:10:94:01:00:02,      Interface: xe-0/0/21
    Active VN_Ports : 1
    VN_Port Information
      VN-Port MAC: 0e:fc:00:01:0b:01
      Active Sessions : 1
      Session Information
        Vlink far-end VN-Port-MAC: 0e:fc:00:01:0a:01
```

List the FIP snooping information on aggregation layer transit switch TS2 using the operational mode command **show fip snooping detail**

```
user@switch> show fip snooping detail
VLAN: vlan200, Mode: VN2VN Snooping
FC-MAP: 0e:fc:00
Beacon_Period: 90000
VN2VN Mode: Point-to-Point
  Enode Information
    Enode-MAC: 10:10:94:01:00:02,      Interface: xe-0/0/30
    Active VN_Ports : 1
    VN_Port Information
      VN-Port MAC: 0e:fc:00:01:0b:01
      Active Sessions : 1
      Session Information
        Vlink far-end VN-Port-MAC: 0e:fc:00:01:0a:01
    Enode-MAC: 10:10:94:01:00:02,      Interface: xe-0/0/31
    Active VN_Ports : 1
    VN_Port Information
      VN-Port MAC: 0e:fc:00:01:0a:01
      Active Sessions : 1
      Session Information
        Vlink far-end VN-Port-MAC: 0e:fc:00:01:0b:01
```

List the FIP snooping information on transit switch TS3 using the operational mode command **show fip snooping detail**

```
user@switch> show fip snooping detail
VLAN: vlan200, Mode: VN2VN Snooping
FC-MAP: 0e:fc:00
Beacon_Period: 90000
VN2VN Mode: Point-to-Point
  Enode Information
```



```

Enode-MAC: 10:10:94:01:00:02,      Interface: xe-0/0/10
Active VN_Ports : 1
VN_Port Information
VN-Port MAC: 0e:fc:00:01:0b:01
Active Sessions : 1
Session Information
Vlink far-end VN-Port-MAC: 0e:fc:00:01:0a:01
Enode-MAC: 10:10:94:01:00:02,      Interface: xe-0/0/11
Active VN_Ports : 1
VN_Port Information
VN-Port MAC: 0e:fc:00:01:0a:01
Active Sessions : 1
Session Information
Vlink far-end VN-Port-MAC: 0e:fc:00:01:0b:01

```

**Meaning** The **show fip snooping detail** command lists all of the transit switch information about VN2VN\_Port FIP snooping and VN2VF\_Port FIP snooping on each transit switch. The command shows that:

- The VLAN is **vlan200**.
- The mode is FIP snooping mode **VN2VN**, for VN2VN\_Port FIP snooping. (If the Mode field shows **VN2VF**, then the FIP snooping mode is VN2VF\_Port FIP snooping.)
- The beacon period is **90000**.
- The interfaces connected to the ENodes are **xe-0/0/20** and **xe-0/0/21** on transit switch TS1, **xe-0/0/30** and **xe-0/0/31** on aggregation layer transit switch TS2, and **xe-0/0/10** and **xe-0/0/11** on transit switch TS3. Because the transit switches are transparent passthrough switches, the network-facing trunk ports “see” the FCoE host ENodes at the far end of the VN2VN\_Port virtual link.

In addition, this useful command shows information about the ENodes and the VN2VN\_Port sessions.

#### *Verifying the Interface Port Mode*

**Purpose** Verify that the interface port modes are **tagged-access** for ENode-facing ports and **trunk** for network-facing ports on each transit switch.

**Action** List the Ethernet switching interfaces to confirm the port mode using the **show ethernet-switching interfaces detail** operational command for each interface. The output is truncated to show only the relevant portions.

List the Ethernet switching interface information on FCoE transit switch TS1 using the operational mode commands **show ethernet-switching interfaces xe-0/0/20.0 detail** and **show ethernet-switching interfaces xe-0/0/21.0 detail**:

```

user@switch> show ethernet-switching interfaces xe-0/0/20.0 detail
Interface: xe-0/0/20.0, Index: 75, State: up, Port mode: Tagged-Access
.
.
.
user@switch> show ethernet-switching interfaces xe-0/0/21.0 detail

```



```
Interface: xe-0/0/21.0, Index: 83, State: up, Port mode: Trunk
.
.
.
```

List the Ethernet switching interface information on aggregation layer FCoE transit switch TS2 using the operational mode commands **show ethernet-switching interfaces xe-0/0/30.0 detail** and **show ethernet-switching interfaces xe-0/0/31.0 detail**:

```
user@switch> show ethernet-switching interfaces xe-0/0/30.0 detail
Interface: xe-0/0/30.0, Index: 71, State: up, Port mode: Trunk
.
.
.
```

```
user@switch> show ethernet-switching interfaces xe-0/0/31.0 detail
Interface: xe-0/0/31.0, Index: 73, State: up, Port mode: Trunk
.
.
.
```

List the Ethernet switching interface information on FCoE transit switch TS3 using the operational mode commands **show ethernet-switching interfaces xe-0/0/10.0 detail** and **show ethernet-switching interfaces xe-0/0/11.0 detail**:

```
user@switch> show ethernet-switching interfaces xe-0/0/10.0 detail
Interface: xe-0/0/10.0, Index: 56, State: up, Port mode: Tagged-Access
.
.
.
```

```
user@switch> show ethernet-switching interfaces xe-0/0/11.0 detail
Interface: xe-0/0/11.0, Index: 59, State: up, Port mode: Trunk
.
.
.
```

#### Related Documentation

- [Example: Configuring VN2VN\\_Port FIP Snooping \(FCoE Hosts Directly Connected to the Same FCoE Transit Switch\) on page 4551](#)
- [Example: Configuring VN2VN\\_Port FIP Snooping \(FCoE Hosts Directly Connected to Different FCoE Transit Switches\) on page 4555](#)
- [Enabling VN2VN\\_Port FIP Snooping and Configuring the Beacon Period on an FCoE Transit Switch on page 4599](#)
- [Understanding VN\\_Port to VN\\_Port FIP Snooping on an FCoE Transit Switch on page 4454](#)

## Example: Configuring Automated Fibre Channel Interface Load Rebalancing

Automated Fibre Channel (FC) interface (NP\_Port) load rebalancing configures the switch to rebalance the session loads on the native FC interfaces automatically on a load-rebalancing trigger event. (Alternatively, you can rebalance the link load on the FC interfaces on demand so that you control when the link load is rebalanced.) Rebalancing the FC link load is a disruptive action that causes some or all of the current sessions to log out, then log in again to be placed on the active FC links in a balanced manner.



This example shows you how to configure and verify automated FC link load rebalancing on an FCoE-FC gateway local FC fabric.

- [Requirements on page 4573](#)
- [Overview on page 4573](#)
- [Configuration on page 4574](#)
- [Verification on page 4575](#)

---

## Requirements

This example uses the following hardware and software components:

- Juniper Networks QFX3500 Switch
- Junos OS Release 12.3 or later for the QFX Series

---

## Overview

When a load rebalancing trigger occurs, the switch automatically rebalances the link loads by redistributing the sessions across the active NP\_Port links.

There are three possible load-rebalancing triggers:

1. When you enable automated load rebalancing, the switch checks the load balance on the existing NP\_Port links. If the links are already balanced, the switch does not rebalance the link load. If the links are not balanced, the switch rebalances the link loads using the configured load-balancing algorithm.
2. When a new NP\_Port link comes up on a local FCoE-FC gateway fabric, the switch rebalances the link load using the configured load-balancing algorithm if automated load balancing is enabled.
3. When the port speed is changed (unless the port speed change does not change the actual port speed, for example, changing the port speed from auto to 8 Gbps).

Automated load rebalancing logs out sessions in accordance with the configured load-balancing algorithm. Disabling automated load rebalancing is not disruptive because the link load is already balanced.

Use automated load rebalancing if you want link loads to be rebalanced automatically instead of at times of your choosing. Keep in mind that load rebalancing is a disruptive event (sessions are logged out).

## Topology

This example configures automated load rebalancing on a local FC fabric on an FCoE-FC gateway. This example does not show you how to configure the load-balancing algorithm or any other load-balancing characteristics. The load-balancing configuration for this example is:

- FC fabric name—`fc_fabric_100`
- FC fabric ID—100



- FC fabric type—Proxy
- FC fabric interfaces—fc-0/0/0, fc-0/0/1, fc-0/0/42, fc-0/0/43, vlan.100, vlan.20
- Load-balancing algorithm—Simple
- No fabric WWN verify—Configured
- Traceoptions—Configured to log in file fc\_fabric\_100\_proxy.log

---

## Configuration

To configure automated load balancing on a local FC fabric, perform this task:

- [\[xref target has no title\]](#)
- [Results on page 4574](#)

### CLI Quick Configuration

To quickly configure automated load balancing, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level:

```
[edit]
set fc-fabrics fc_fabric_100 proxy auto-load-rebalance
```

### Step-by-Step Procedure

- Configure automated load balancing on FC fabric fc\_fabric\_100:  
user@switch# set fc-fabrics fc\_fabric\_100 proxy auto-load-rebalance

## Results

Display the results of the configuration:

```
user@switch> show configuration fc-fabrics
fc_fabric_100 {
    fabric-id 100;
    fabric-type proxy;
    interface {
        fc-0/0/0.0;
        fc-0/0/1.0;
        vlan.100;
        vlan.20;
        fc-0/0/42.0;
        fc-0/0/43.0;
    }
    proxy {
        traceoptions {
            file fc_fabric_100_proxy.log size 20m;
            flag all;
        }
        load-balance-algorithm simple;
        auto-load-rebalance;
        no-fabric-wwn-verify;
    }
}
```



## Verification

### *Verifying That Automated Load Rebalancing Is Enabled*

**Purpose** Verify that automated load rebalancing is configured on local FC fabric **fc\_fabric\_100**.

**Action** Verify the results of the automated load-rebalancing configuration using the operational mode command **show fibre-channel proxy fabric-state fabric fc\_fabric\_100**:

```
user@switch> show fibre-channel proxy fabric-state fabric fc_fabric_100
Fabric: fc_fabric_100, Fabric-id: 100
Proxy load balance algorithm: Simple, Fabric WWN verification: No
Auto load rebalance enabled : Yes
Last rebalance start-time   : Never
Last rebalance end-time     : Never
Last rebalance trigger      : None
Last rebalance trigger-time  : Mon Sep 10 21:42:30 2012 usec: 814602
Last rebalance trigger-result: None
```

**Meaning** The **show fibre-channel proxy fabric-state fabric fc\_fabric\_100** operational command displays information about the specified local FC fabric. The output shows that the **Auto load rebalance enabled** field value is **Yes**, which indicates that automated load rebalancing is enabled on fabric **fc\_fabric\_100**.

**Related Documentation**

- [Defining the Proxy Load-Balancing Algorithm on page 4586](#)
- [Simulating On-Demand Fibre Channel Link Load Rebalancing \(Dry Run Test\) on page 4588](#)
- [Understanding Load Balancing in an FCoE-FC Gateway Proxy Fabric on page 4431](#)
- [Monitoring Fibre Channel Interface Load Balancing on page 4665](#)

## Configuration Tasks

- [Configuring an FCoE-FC Gateway Fibre Channel Fabric on page 4576](#)
- [Disabling the Fabric WWN Verification Check on page 4577](#)
- [Configuring a Physical Fibre Channel Interface on page 4578](#)
- [Configuring a Fibre Channel Interface on page 4579](#)
- [Configuring an FCoE VLAN Interface on page 4582](#)
- [Assigning Interfaces to a Fibre Channel Fabric on page 4584](#)
- [Deleting a Fibre Channel Interface on page 4585](#)
- [Disabling Storm Control on FCoE Interfaces on an FCoE-FC Gateway on page 4586](#)
- [Defining the Proxy Load-Balancing Algorithm on page 4586](#)
- [Simulating On-Demand Fibre Channel Link Load Rebalancing \(Dry Run Test\) on page 4588](#)
- [Enabling and Disabling CoS OxID Hash Control on page 4589](#)
- [Configuring FIP on an FCoE-FC Gateway on page 4589](#)
- [Setting the Maximum Number of FIP Login Sessions per ENode on page 4592](#)



- [Setting the Maximum Number of FIP Login Sessions per FC Interface on page 4593](#)
- [Setting the Maximum Number of FIP Login Sessions per FC Fabric on page 4594](#)
- [Setting the Maximum Number of FIP Login Sessions per Node Device on page 4595](#)
- [Configuring VN2VF\\_Port FIP Snooping on an FCoE Transit Switch on page 4596](#)
- [Disabling VN2VF\\_Port FIP Snooping on an FCoE-FC Gateway Switch Interface on page 4598](#)
- [Enabling VN2VN\\_Port FIP Snooping and Configuring the Beacon Period on an FCoE Transit Switch on page 4599](#)
- [Configuring the DCBX Mode on page 4600](#)
- [Configuring DCBX Autonegotiation on page 4601](#)
- [Disabling the ETS Recommendation TLV on page 4604](#)
- [Defining an Application for DCBX Application Protocol TLV Exchange on page 4604](#)
- [Configuring an Application Map for DCBX Application Protocol TLV Exchange on page 4606](#)
- [Applying an Application Map to an Interface for DCBX Application Protocol TLV Exchange on page 4607](#)

## Configuring an FCoE-FC Gateway Fibre Channel Fabric

Fibre Channel (FC) fabric configuration consists of creating a unique name and identifier for each FC fabric you want to create and configuring it as an FCoE-FC gateway.

You can create a maximum of 12 FC fabrics on a QFX3500 switch. After you create a fabric, you can create and assign interfaces to the fabric, configure FIP parameters for the fabric, and set proxy traceoptions.

To configure an FC fabric using the CLI, specify a unique name and identification number for the fabric:

1. Configure the fabric name and fabric ID:

```
[edit]
user@switch# set fc-fabrics fabric-name fabric-id fabric-id
```



**NOTE:** Changing the fabric name or the fabric ID causes all logins to drop and forces the ENodes to log in again.

For example, to configure an FC fabric with the name **fab\_ulous** and the fabric ID 10 (the range of **fabric-id** values is 1 through 4095):

```
[edit]
user@switch# set fc-fabrics fab_ulous fabric-id 10
```

2. Configure the fabric as a gateway fabric:

```
[edit fc-fabrics fabric-name]
user@switch# set fabric-type proxy
```

For example, to configure the FC fabric with the name **fab\_ulous** as a gateway fabric:

```
[edit fc-fabrics fab_ulous]
user@switch# set fabric-type proxy
```



## Related Documentation

- [Configuring a Fibre Channel Interface on page 4579](#)
- [Configuring an FCoE VLAN Interface on page 4582](#)
- [Assigning Interfaces to a Fibre Channel Fabric on page 4584](#)
- [Configuring FIP on an FCoE-FC Gateway on page 4589](#)
- [Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495](#)
- [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)
- [Understanding an FCoE-FC Gateway on page 4399](#)

## Disabling the Fabric WWN Verification Check

When a QFX Series NP\_Port sends a fabric login (FLOGI) request to a Fibre Channel (FC) switch, the FLOGI accept (FLOGI-ACC) reply from the FC switch contains the SAN fabric worldwide name (WWN). The QFX Series uses the SAN fabric WWN in the multicast discovery advertisement (MDA) that the QFX Series sends to the ENodes in the FCoE network.

However, some FC switches substitute their own WWN (often the FC switch's virtual WWN) for the SAN fabric WWN in the FLOGI-ACC message. In this case, different NP\_Ports that log in to the same FC fabric might receive different fabric WWNs in the FLOGI-ACC messages if the NP\_Ports are connected to different FC switches in the SAN fabric.

If the QFX Series receives different fabric WWNs on NP\_Ports that are connected to the same SAN fabric, the QFX Series uses the first fabric WWN it receives in the MDA it sends to the ENodes. The QFX Series isolates the NP\_Ports that receive a different fabric WWN from other FC switches in that SAN fabric. No ENode sessions are assigned to the isolated NP\_Ports. FC traffic is assigned only to NP\_Ports that receive a fabric WWN in the FLOGI-ACC message that matches the fabric WWN received by the first NP\_Port to log in to the FC fabric. (If an NP\_Port receives a fabric WWN that does not match the fabric WWN received by the first NP\_Port to log in to the FC fabric, it does not carry traffic to the SAN fabric.)

To prevent ENodes from being isolated due to a mismatched fabric WWN, you can disable the gateway fabric WWN verification check. Disabling the fabric WWN verification check enables all NP\_Ports connected to a SAN fabric are used to carry traffic between the gateway and the FC switch, regardless of the fabric WWN the NP\_Port receives in the FLOGI-ACC message.



**NOTE:** Disabling or enabling the fabric WWN verification check logs out all FCoE sessions.

To disable the fabric WWN verification check:

- `[edit fc-fabrics fabric-name proxy]`  
`user@switch# set no-fabric-wwn-verify`



- Related Documentation**
- [Understanding FCoE-FC Gateway Functions on page 4403](#)
  - [show fibre-channel proxy fabric-state on page 4757](#)

## Configuring a Physical Fibre Channel Interface

When you configure the switch as an FCoE-FC gateway, you must configure either 6 or 12 of the physical interfaces as native FC interfaces. Native FC interfaces connect to the storage area network (SAN) FC switch.

You can configure ports xe-0/0/0 through xe-0/0/5 as fc-0/0/0 through fc-0/0/5, and ports xe-0/0/42 through xe-0/0/47 as fc-0/0/42 through fc-0/0/47 to create blocks of native FC interfaces. You cannot individually configure a single port as a native FC interface. Within these port blocks, you cannot mix FC interfaces with Ethernet interfaces. All of the ports in a block must be either native FC interfaces or Ethernet interfaces.

You can configure:

- Six native FC interfaces by configuring either ports xe-0/0/0 through xe-0/0/5 as fc-0/0/0 through fc-0/0/5, or ports xe-0/0/42 through xe-0/0/47 as fc-0/0/42 through fc-0/0/47.
- Twelve native FC interfaces by configuring ports xe-0/0/0 through xe-0/0/5 as fc-0/0/0 through fc-0/0/5 and ports xe-0/0/42 through xe-0/0/47 as fc-0/0/42 through fc-0/0/47.
- No native FC interfaces by leaving ports xe-0/0/0 through xe-0/0/5 and ports xe-0/0/42 through xe-0/0/47 in their default state as Ethernet interfaces.
- To configure physical FC interfaces using the CLI, specify the physical port block you want to configure on the switch as native FC interfaces:

```
[edit chassis]
user@switch# set fpc fpc pic pic fibre-channel port-range port-range-low port-range-high
```

For example, to configure six native FC interfaces, you can configure ports 0 through 5 as physical FC interfaces:

```
[edit chassis]
user@switch# set fpc 0 pic 0 fibre-channel port-range 0 5
```

To configure 12 native FC interfaces requires two separate statements:

```
[edit chassis]
user@switch# set fpc 0 pic 0 fibre-channel port-range 0 5
user@switch# set fpc 0 pic 0 fibre-channel port-range 42 47
```

- Related Documentation**
- [Configuring an FCoE-FC Gateway Fibre Channel Fabric on page 4576](#)
  - [Configuring an FCoE VLAN Interface on page 4582](#)
  - [Configuring a Fibre Channel Interface on page 4579](#)
  - [Assigning Interfaces to a Fibre Channel Fabric on page 4584](#)
  - [Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495](#)



- [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)

## Configuring a Fibre Channel Interface

When a QFX3500 acts as an FCoE-FC gateway, native Fibre Channel (FC) traffic flows between the switch and the storage area network (SAN) FC switch. When you configure a port as an FC interface, it transports only FC traffic. It does not transport Ethernet traffic.

You can configure ports xe-0/0/0 through xe-0/0/5 as fc-0/0/0 through fc-0/0/5 and ports xe-0/0/42 through xe-0/0/47 as fc-0/0/42 through fc-0/0/47 to create blocks of native FC interfaces.

Each of these blocks of ports must be configured either as all Ethernet ports or as all native FC ports. Within each block of ports, you cannot mix FC and Ethernet interfaces. This means that you can configure 0, 6, or 12 ports as native FC ports. “[Configuring a Physical Fibre Channel Interface](#)” on page 4578 describes how to configure the port blocks as physical FC interfaces.



**NOTE:** Do not configure ports that you want to use for native FC traffic as part of an Ethernet VLAN or as Ethernet ports.

Configure a port as an FC interface when the port connects to the F\_Port of an FC switch.

FC interface configuration includes:

- Explicitly specifying one or more ports as an FC family interface in NP\_Port mode (mandatory).
- Configuring the FC interface options port speed and buffer-to-buffer credit state change number (BB\_SC\_N) (optional).
- Configuring the interface as a loopback interface (optional).

The buffer-to-buffer state change number feature prevents the loss of buffer-to-buffer credits between the two interfaces on either end of an FC link. The state change number determines the number of frames and receiver ready (R\_RDY) primitives the interfaces exchange between the state change send (BB\_SCs) and the state change receive (BB\_SCr) primitives used to track these transactions.

Enabling BB\_SC\_N by configuring BB\_SC\_N on both of the FC link interfaces:

- Requests that  $2^{BB\_SC\_N}$  number of frames be sent between two consecutive BB\_SCs primitives, and
- Requests that  $2^{BB\_SC\_N}$  number of R\_RDY primitives be sent between two consecutive BB\_SCr primitives.

When the number of R\_RDY primitives received equals  $2^{BB\_SC\_N}$ , the R\_RDY counter resets to zero. When the number of frames received equals  $2^{BB\_SC\_N}$ , the frame counter resets



to zero. The interfaces calculate the number of buffer-to-buffer credits lost based on counter discrepancies and take corrective action to recover the lost credits.

If you enable BB\_SC\_N, the recommended BB\_SC\_N setting is eight. Setting the BB\_SC\_N number to zero (0) disables the feature. If either of the two connected FC interfaces is configured with zero as the BB\_SC\_N value, then both interfaces disable the feature. If the two connected FC interfaces have different nonzero BB\_SC\_N numbers configured, both interfaces use the higher number.

For the port to transport FC traffic, you must also set the physical port as an FC port using the **port-range** command.

To configure an FC interface using the CLI:

1. Specify the interface as family FC and set the port mode to NP\_Port (setting the port mode to NP\_Port is a mandatory configuration):

```
[edit]
user@switch# set interfaces interface-name unit unit family fibre-channel port-mode np-port
```

For example, to configure the interface **fc-0/0/3** as an FC interface and set the port mode to **np-port**:

```
[edit]
user@switch# set interfaces fc-0/0/3 unit 0 family fibre-channel port-mode np-port
```

2. Configure the FC interface speed option:

```
[edit]
user@switch: set interfaces interface-name fibrechannel-options speed (auto-negotiation | 2g | 4g | 8g)
```

For example, to set the FC interface speed option to **8g** for the interface **fc-0/0/3**:

```
[edit]
user@switch: set interfaces fc-0/0/3 fibrechannel-options speed 8g
```

The default port mode is **auto-negotiation**, which sets the port speed to match the speed of the attached FC F\_Port interface (2 Gbps, 4 Gbps, or 8 Gbps).

3. Configure the optional buffer-to-buffer credit state change number:

```
[edit]
user@switch: set interfaces interface-name fibrechannel-options bb-sc-n 0..15
```

For example, to set the FC interface buffer-to-buffer credit state change number to **8** for the interface **fc-0/0/3**:

```
[edit]
user@switch: set interfaces fc-0/0/3 fibrechannel-options bb-sc-n 8
```

After you configure one or more FC interfaces, assign them and an FCoE VLAN to an FC fabric.

#### Related Documentation

- [Assigning Interfaces to a Fibre Channel Fabric on page 4584](#)
- [Configuring an FCoE VLAN Interface on page 4582](#)
- [Configuring a Physical Fibre Channel Interface on page 4578](#)
- [Deleting a Fibre Channel Interface on page 4585](#)



- [Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495](#)
- [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)
- [Understanding an FCoE-FC Gateway on page 4399](#)



## Configuring an FCoE VLAN Interface

When you configure the switch as an FCoE-FC gateway, a Layer 3 FCoE VLAN interface transmits and receives Fibre Channel over Ethernet (FCoE) traffic between the gateway and FCoE-capable servers on the Ethernet network. Configuring a Layer 3 FCoE VLAN interface on the switch creates virtual fabric port (VF\_Port) interfaces facing the FCoE server virtual node ports (VN\_Ports).

The FCoE VLAN interface is the interface for the dedicated VLAN the FCoE servers use for FCoE traffic. Each FC fabric requires at least one dedicated FCoE VLAN and at least one Layer 3 FCoE VLAN interface to transport FCoE traffic. On QFabric systems, the FCoE VLAN interface, the FCoE VLAN, and the interfaces that are members of the FCoE VLAN must be on the same Node device.



---

**NOTE:** FCoE VLANs (any VLAN that carries FCoE traffic) support only Spanning Tree Protocol (STP) and link aggregation group (LAG) Layer 2 features.

---

Before you configure an FCoE VLAN interface, create the FCoE VLAN and assign 10-Gigabit Ethernet interfaces configured in tagged-access port mode to the VLAN. These 10-Gigabit Ethernet interfaces are the physical interfaces that transport the FCoE traffic to and from the FCoE devices in the Ethernet network.

Each Ethernet interface that connects to FCoE devices must also include the native VLAN to transport FIP traffic, because FIP VLAN discovery and notification frames are exchanged as untagged packets. The FCoE VLAN must carry only FCoE traffic. A VLAN cannot transport a mix of FCoE and standard Ethernet traffic.

FCoE VLAN interface configuration includes:

- Configuring a VLAN to use as a dedicated FCoE VLAN.
- Configuring a native VLAN for FIP traffic.
- Configuring member interfaces for the FCoE VLAN.
- Configuring the FCoE VLAN as a Fibre Channel (family) VLAN and setting the port mode value to **f-port**. Explicitly configuring the FCoE VLAN interface in F\_Port mode is mandatory. The switch interface with which the FCoE server VN\_Ports communicate must present a VF\_Port to the servers.
- Configuring the FCoE VLAN interface as the Layer 3 interface for FCoE traffic.

To configure an FCoE VLAN interface:



1. Configure a dedicated FCoE VLAN:

```
[edit vlans]
user@switch# set vlan-name vlan-id vlan-id
```

For example, to configure a VLAN named **fcoe\_vlan** with a VLAN ID of **100** as the FCoE VLAN:

```
[edit vlans]
user@switch# set fcoe_vlan vlan-id 100
```

2. Configure a native VLAN for FIP traffic:

```
[edit vlans]
user@switch# set native vlan-id vlan-id
```

For example, to configure the native VLAN with a VLAN ID of 1:

```
[edit vlans]
user@switch# set native vlan-id 1
```

3. Configure member interfaces for the FCoE VLAN (use **ethernet-switching** as the family and **tagged-access** as the port mode):

```
[edit interfaces]
user@switch# set interface-name unit unit family family port-mode mode vlan members
vlan-name
```

For example, to configure the interface **xe-0/0/10** as a member of the FCoE VLAN **fcoe\_vlan**:

```
[edit interfaces]
user@switch# set xe-0/0/10 unit 0 family ethernet-switching port-mode tagged-access vlan
members fcoe_vlan
```

4. Assign member interfaces to the native VLAN:

```
[edit interfaces]
user@switch# set interface-name unit unit family family native-vlan-id vlan-id
```

For example, to configure the interface **xe-0/0/10** as a member of the native VLAN with the native VLAN ID 1:

```
[edit interfaces]
user@switch# set xe-0/0/10 unit 0 family ethernet-switching native-vlan-id 1
```

5. Assign the Ethernet interfaces to the FCoE VLAN:

```
[edit vlans]
user@switch# set vlan-name interface interface-name
```

For example, to assign the interface **xe-0/0/10.0** to the FCoE VLAN named **fcoe\_vlan**:

```
[edit vlans]
user@switch# set fcoe_vlan interface xe-0/0/10.0
```

6. Define an interface as an FCoE VLAN interface in F\_Port mode (to present a VF\_Port to the FCoE servers):

```
[edit interfaces]
user@switch# set vlan unit unit family fibre-channel port-mode f-port
```

For example, to configure VLAN unit **100** as an FCoE VLAN interface and set the port mode to **f-port**:

```
[edit interfaces]
user@switch# set vlan unit 100 family fibre-channel port-mode f-port
```

7. Define the Layer 3 FCoE VLAN interface:



```
[edit vlans]
user@switch# set vlan-name l3-interface vlan-interface-name
```

For example, to configure VLAN interface unit **100** (the FCoE VLAN interface defined earlier in this example) as the Layer 3 FCoE VLAN interface for FCoE VLAN **fcoe\_vlan**:

```
[edit vlans]
user@switch# set fcoe_vlan l3-interface vlan.100
```

#### Related Documentation

- [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)
- [Configuring an FCoE-FC Gateway Fibre Channel Fabric on page 4576](#)
- [Configuring a Physical Fibre Channel Interface on page 4578](#)
- [Configuring a Fibre Channel Interface on page 4579](#)
- [Assigning Interfaces to a Fibre Channel Fabric on page 4584](#)
- [Disabling VN2VF\\_Port FIP Snooping on an FCoE-FC Gateway Switch Interface on page 4598](#)
- [Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495](#)

## Assigning Interfaces to a Fibre Channel Fabric

When you configure the switch as an FCoE-FC gateway, you assign one or more (up to 12) native Fibre Channel (FC) interfaces and at least one FCoE VLAN interface to each FC fabric. FC interfaces transport native FC traffic between the proxy gateway and the storage area network (SAN) FC switch. FCoE VLAN interfaces transport FCoE traffic between FCoE-capable servers and the gateway.

Each FC fabric needs both types of interfaces to transport traffic between FCoE servers on the Ethernet network and FC storage devices in the core FC network behind the FC switch. FCoE traffic between the FCoE servers and the gateway must travel in a dedicated FCoE VLAN. Native FC traffic passes between the gateway and the FC switch on the native FC interfaces.

You must configure the FC interfaces and the FCoE VLAN interfaces that you assign to a particular fabric on the same Juniper Networks QFX3500 Switch. Traffic between an FCoE device and the FC switch must ingress and egress the same gateway.

To assign core-facing native FC interfaces and a server-facing FCoE VLAN interface to an FC fabric, configure a fabric and then specify the interfaces:

1. Assign the native FC interfaces to the FC fabric:

```
[edit fc-fabrics fabric-name]
user@switch: set interface interface-name
user@switch: set interface interface-name
user@switch: set interface interface-name
...
```

2. Assign an FCoE VLAN interface to the FC fabric:

```
[edit fc-fabrics fabric-name]
user@switch: set interface vlan-name
```



For example, to assign the native FC interfaces **fc-0/0/0.0**, **fc-0/0/1.0**, and **fc-0/0/2.0** and the FCoE VLAN interface **vlan.100** to an FC fabric named **san\_tana**:

```
user@switch: set fc-fabrics san_tana interface fc-0/0/0.0
user@switch: set fc-fabrics san_tana interface fc-0/0/1.0
user@switch: set fc-fabrics san_tana interface fc-0/0/2.0
user@switch: set fc-fabrics san_tana interface vlan.100
```

#### Related Documentation

- [Configuring a Fibre Channel Interface on page 4579](#)
- [Configuring an FCoE VLAN Interface on page 4582](#)
- [Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495](#)
- [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)
- [Understanding an FCoE-FC Gateway on page 4399](#)

## Deleting a Fibre Channel Interface

Before you delete a Fibre Channel (FC) interface, you must first delete the interface from the FC fabric configuration. This prevents configuration errors that would result if you deleted an FC interface from the **[edit interfaces]** hierarchy level but did not delete the interface from the FC fabric.

When you configure the switch as an FCoE-FC gateway, FC interfaces transmit and receive native FC traffic between the gateway and the FC switch. You can configure ports **xe-0/0/0** through **xe-0/0/5** as **fc-0/0/0** through **fc-0/0/5** and ports **xe-0/0/42** through **xe-0/0/47** as **fc-0/0/42** through **fc-0/0/47** to create one or two blocks of six native FC interfaces.

To delete an FC interface using the CLI:

1. Delete the FC interface from the FC fabric to which it belongs:

```
[edit]
user@switch# delete fc-fabrics fabric-name interface interface-name
```

For example, to delete the FC interface **fc-0/0/3.0** from an FC fabric named **sanfab1**:

```
[edit]
user@switch# delete fc-fabrics sanfab1 interface fc-0/0/3.0
```

2. Delete the FC interface from the switch **[edit interfaces]** hierarchy:

```
[edit]
user@switch: delete interfaces interface-name
```

For example, to delete the interface **fc-0/0/3.0** from the switch:

```
[edit]
user@switch: delete interfaces fc-0/0/3.0
```

The FC interface has been deleted from the FC fabric and from the switch.

#### Related Documentation

- [Assigning Interfaces to a Fibre Channel Fabric on page 4584](#)
- [Configuring a Physical Fibre Channel Interface on page 4578](#)



- [Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495](#)
- [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)

## Disabling Storm Control on FCoE Interfaces on an FCoE-FC Gateway

Storm control is enabled by default on all interfaces. However, when an interface on a QFX3500 switch or a QFX3500 Node device in a QFabric system is configured as part of an FCoE-FC gateway VLAN, storm control can force an interface to drop FCoE packets when traffic passes a certain threshold. When a QFX3500 switch or a QFX3500 Node device is acting as an FCoE-FC gateway, disable storm control on the QFX3500 switch or QFX3500 Node device. If desired, enable storm control on Ethernet interfaces that do not belong to the FCoE-FC gateway VLAN.

You can disable storm control in either of two ways:

- Disable storm control on all interfaces, then enable storm control on the interfaces you want to use storm control. (From the default configuration, you cannot disable storm control on individual interfaces because the default configuration enables storm control on **all** interfaces, not on individual interfaces.)

For example, if you want interfaces xe-0/0/20, xe-0/0/21, and xe-0/0/22 to use storm control, disable storm control on all interfaces, then enable storm control on those three interfaces:

1. Disable storm control on all interfaces:

```
user@switch# delete ethernet-switching-options storm-control interface all
```

2. Enable storm control on interfaces xe-0/0/20, xe-0/0/21, and xe-0/0/22:

```
user@switch# set ethernet-switching-options storm-control interface xe-0/0/20
user@switch# set ethernet-switching-options storm-control interface xe-0/0/21
user@switch# set ethernet-switching-options storm-control interface xe-0/0/22
```

- Disable storm control for all unknown unicast traffic on all interfaces by including the following statement in your configuration:

```
user@switch# set ethernet-switching-options storm-control interface all no-unknown-unicast
```

### Related Documentation

- [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)
- [Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495](#)

## Defining the Proxy Load-Balancing Algorithm

When the QFX Series is configured as an FCoE-FC gateway, it balances the FCoE session load assigned to each NP\_Port link between the gateway and the FC switch in the FC SAN to avoid overloading or underutilizing each link. The QFX Series supports three types of load-balancing mechanisms:

- Simple load balancing—Load balancing is based on the weighted utilization (session load) of the NP\_Ports connected to an FC fabric. The session load is the sum of the



FLOGI and FDISC sessions on each link. Each new ENode fabric login (FLOGI) or VN\_Port fabric discovery (FDISC) session is assigned to the least-loaded link, so an FDISC session initiated by the VN\_Port on an ENode might not be assigned to the same link as the parent ENode's FLOGI session. Simple load balancing is the default algorithm. Simple load balancing is the default load-balancing algorithm. Rebalancing the link load disrupts only selected sessions to minimize the impact (the switch uses an algorithm to log out only the sessions that need to be moved to other links to balance the load when those sessions log in again).

- **ENode-based load balancing**—Load balancing is based on the weighted utilization (session load) of the NP\_Ports connected to an FC fabric. The session load is the sum of the FLOGI and FDISC sessions on each link. However, when an ENode logs in to the fabric, the switch places all subsequent VN\_Port FDISC sessions associated with that ENode on the same link as the ENode FLOGI session, regardless of the link load. New ENode FLOGIs are placed on the least-loaded link. The switch calculates the link load based on the combined total of FLOGIs and FDISCs on each NP\_Port link. Rebalancing the link load disrupts all sessions (all sessions log out and then log in again).
- **FLOGI-based load balancing**—Load balancing is based on the weighted utilization (session load) of the NP\_Ports connected to an FC fabric. The session load is the sum of the FLOGI sessions on each link. FDISC sessions are not counted. When an ENode logs in to the fabric, the switch places all subsequent VN\_Port FDISC sessions associated with that ENode on the same link as the ENode FLOGI session, regardless of the link load. New ENode FLOGIs are placed on the least-loaded link. Rebalancing the link load disrupts only selected sessions to minimize the impact (the switch uses an algorithm to log out only the sessions that need to be moved to other links to balance the load when those sessions log in again).

To define the proxy load-balancing algorithm for a proxy fabric on the FCoE-FC gateway, set the algorithm as **enode-based**, **simple**, or **flogi-based**:

- [edit fc-fabrics *fabric-name* proxy]  
user@switch# **set load-balance-algorithm (enode-based | simple | flogi-based)**

For example, to configure a gateway fabric named **san\_fab1** to use **enode-based** load balancing:

```
user@switch# set fc-fabrics san_fab1 proxy load-balance-algorithm enode-based
```

#### Related Documentation

- [Example: Configuring Automated Fibre Channel Interface Load Rebalancing on page 4572](#)
- [Simulating On-Demand Fibre Channel Link Load Rebalancing \(Dry Run Test\) on page 4588](#)
- [Understanding Load Balancing in an FCoE-FC Gateway Proxy Fabric on page 4431](#)
- [Monitoring Fibre Channel Interface Load Balancing on page 4665](#)



## Simulating On-Demand Fibre Channel Link Load Rebalancing (Dry Run Test)

On-demand Fibre Channel (FC) link load rebalancing is a disruptive action that causes sessions to log out of the network, then log back in to be placed on FC links (NP\_Ports) in a balanced manner. The number of sessions logged out to rebalance the links depends on the load-balancing algorithm used (simple, ENode-based, or FLOGI-based) and whether or not the load is already balanced. (If the link load is already balanced, the switch does not rebalance the loads when you request on-demand load rebalancing.)

You can use the **dry-run** option to list the sessions that might be affected (logged out to be redistributed among the active FC interface links) by on-demand load rebalancing *before* you actually rebalance the link load. (Because new sessions might log in between the time you perform a dry run and the time you request on-demand load rebalancing, the affected sessions may change. Therefore, the sooner that you perform an on-demand load rebalance after you perform a dry run, the more accurate the dry run results are likely to be.)

To request a link load rebalancing dry run:

```
user@switch> request fibre-channel proxy load-rebalance dry-run fabric fabric-name
```

For example, to request a dry run on an FC fabric named *fc\_fabric\_100* to display a list of sessions that might be disrupted if you request an actual link load rebalance:

```
user@switch> request fibre-channel proxy load-rebalance dry-run fabric fc_fabric_100
Fabric: fc_fabric_100, Fabric-id: 100
F-Port      FCID      Port-WWN      NP-Port
vlan.100    0x8a013a  02:01:00:64:00:00:2a  fc-0/0/1.0
vlan.100    0x8a013c  02:01:00:64:00:00:2b  fc-0/0/1.0
vlan.100    0x8a0146  02:01:00:64:00:00:2e  fc-0/0/1.0
vlan.100    0x8a014c  02:01:00:64:00:00:2f  fc-0/0/1.0
```

### Related Documentation

- [request fibre-channel proxy load-rebalance on page 4681](#)
- [Defining the Proxy Load-Balancing Algorithm on page 4586](#)
- [Example: Configuring Automated Fibre Channel Interface Load Rebalancing on page 4572](#)
- [Understanding Load Balancing in an FCoE-FC Gateway Proxy Fabric on page 4431](#)
- [Monitoring Fibre Channel Interface Load Balancing on page 4665](#)



## Enabling and Disabling CoS OxID Hash Control

The originator exchange identifier (OxID) field is one of several fields that the switch can use in its hash function computation for FCoE traffic load balancing over multiple outgoing links. You can configure whether or not the switch uses the OxID in the hash computation.

Including the OxID field in the load-balancing hash computation allows different exchanges between a pair of Fibre Channel (FC) endpoints (such as an FCoE host and an FC storage device) to take different paths across the network, thus improving the aggregate network throughput.

However, if the paths between different sets of FC endpoints have common links, congestion on one set of FC endpoints can affect the other set of endpoints. Such congestion can happen if the FCoE traffic on the two sets of endpoints uses the same priority (IEEE 802.1p code point). It is common for networks to use priority 3 (IEEE 802.1p code point 011) for FCoE traffic. However, on the QFX3500, you can assign different IEEE priorities to different lossless FCoE flows as described in [“Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows” on page 4896](#) to further separate the traffic flows.

OxID hash control is enabled by default.

- To enable OxID hash control field for FCoE traffic load balancing:

```
[edit forwarding-options hash-key]
user@switch# set family fcoe oxid enable
```

- To disable OxID hash control field for FCoE traffic load balancing:

```
[edit forwarding-options hash-key]
user@switch# set family fcoe oxid disable
```

### Related Documentation

- [Understanding OxID Hash Control for FCoE Traffic Load Balancing on page 4447](#)
- [Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896](#)

## Configuring FIP on an FCoE-FC Gateway

Fibre Channel over Ethernet (FCoE) Initialization Protocol (FIP) establishes and maintains Fibre Channel (FC) virtual links between pairs of FCoE devices. A virtual link emulates the physical point-to-point link that FC requires between two FC devices.

FIP is enabled by default and uses the default FIP settings on all FCoE interfaces that are part of the gateway FC fabric. You can use the default FIP parameter values, or you can configure FIP parameters globally or on a per-interface basis. Configuring FIP on an individual interface overrides the global FIP configuration.

You can configure the following parameters globally for the fabric and per interface:

- FIP keepalive message transmission interval—This interval is the time period between sending FIP keepalive messages.



- **Priority**—If an FCoE node (ENode) connects to more than one switch, the priority value determines the switch to which the ENode connects. The switch with the lowest priority number has the highest priority.

You can only configure the following parameters globally on an FC fabric:

- **FC-MAP**—The 24-bit FCoE mapped address prefix that identifies the attached FC switch in the SAN fabric. The FC-MAP value is used in the fabric provided MAC address (FPMA) created for each ENode that logs in. This value must be the same for the FC switch and the QFX Series.



**NOTE:** Changing the FC-MAP value causes all logins to drop and forces the ENodes to log in again.

- **FCoE trusted**—You can globally configure all of the Ethernet ports in a specified FC fabric to be FCoE trusted. You might want to configure interfaces as FCoE trusted if the interfaces are connected to a transit switch that is performing FIP snooping. For interfaces that are directly connected to FCoE hosts, FIP snooping should be enabled, and you should not configure the fabric as FCoE trusted.



**NOTE:** Do not configure interfaces with FIP snooping enabled as FCoE trusted.

Configuring interfaces as FCoE trusted reduces system overhead by eliminating the need for filters. The total number of sessions the system can support is 2500 sessions. Sessions are defined as the combined number of VN\_Port to VF\_Port sessions and VN\_Port to VN\_Port sessions. (Although VN2VF and VN2VN sessions run in different FCoE VLANs, the session limit is a system limit, not a per-VLAN limit.)



**NOTE:** A session is a FLOGI or FDISC login to the FC SAN fabric. Session does not refer to end-to-end storage sessions. There is no limit to the number of end-to-end storage sessions.



**NOTE:** Changing the fabric ports from untrusted to trusted removes any existing FIP snooping filters from the ports. Changing the fabric ports from trusted to untrusted forces all of the FCoE sessions on those ports to log out so that when the ENodes and VN\_Ports log in again, the switch can build the appropriate FIP snooping filters.

- **Maximum number of FCoE sessions per ENode**—You can globally configure the maximum number of FCoE sessions (FLOGI plus FDISC) permitted from an ENode. The maximum number of sessions per ENode is 2000 sessions. The total number of sessions (VN2VF\_Port sessions and VN2VN\_Port sessions combined) cannot exceed the gateway fabric's maximum limit of 2500 sessions.



To configure FIP options globally using the CLI:

1. Specify the fabric on which you want to configure FIP:

```
[edit]
user@switch# set fc-fabrics fabric-name protocols fip
```

2. Configure the FIP keepalive message transmission interval in milliseconds to specify the amount of time between periodic FIP discovery advertisements for the fabric interfaces (the default is 8000 ms; the range is 250 through 90000 ms):

```
[edit fc-fabrics fabric-name protocols fip]
user@switch# set fka-adv-period milliseconds
```

3. Configure the priority value the switch advertises to ENodes in the range from 0 through 255; the default value is 128:

```
[edit fc-fabrics fabric-name protocols fip]
user@switch# set priority priority
```

4. Configure the FC-MAP value to match the FC-MAP value of the attached FC switch in the FC SAN fabric; the range of possible values is 0EFC00 through 0EFCFF, and the default value is 0EFC00:

```
[edit fc-fabrics fabric-name protocols fip]
user@switch# set fc-map fc-map
```

5. Configure the interfaces in the FC fabric as FCoE trusted (in this example, we assume that the interfaces have not been enabled for FIP snooping):

```
[edit fc-fabrics fabric-name protocols fip]
user@switch# set fcoe-trusted
```

6. Configure the maximum number of FCoE sessions for each ENode in the fabric:

```
[edit fc-fabrics fabric-name protocols fip]
user@switch# set max-sessions-per-enode
```

For example, to configure all FCoE interfaces associated with an FC fabric called **movieco\_san** with a FIP keepalive interval value of **25000** milliseconds, a priority of **70**, an FC-MAP value of **0EFC01**, as FCoE trusted, and with a maximum number of FCoE sessions per ENode of 200 sessions:

```
[edit fc-fabrics movieco_san protocols fip]
user@switch# set fka-adv-period 25000
user@switch# set priority 70
user@switch# set fc-map 0EFC01
user@switch# set fcoe-trusted
user@switch# set max-sessions-per-enode 200
```

To override the global FC fabric FIP configuration for a specific FCoE interface using the CLI:

1. Specify the fabric and interface on which you want to configure FIP:

```
[edit fc-fabrics fabric-name protocols fip interface interface-name]
```

2. Configure the FIP keepalive message transmission interval and priority:

```
[edit fc-fabrics fabric-name protocols fip interface interface-name]
user@switch# set fka-adv-period milliseconds
user@switch# set priority priority
```



- Related Documentation**
- [Configuring an FCoE-FC Gateway Fibre Channel Fabric on page 4576](#)
  - [Configuring an FCoE VLAN Interface on page 4582](#)
  - [Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495](#)
  - [Understanding FIP Parameters on an FCoE-FC Gateway on page 4416](#)

## Setting the Maximum Number of FIP Login Sessions per ENode

When the switch acts as an FCoE-FC gateway, FCoE node (ENode) devices in the Ethernet network use the gateway to connect to the Fibre Channel (FC) storage area network (SAN). You can limit the maximum number of FIP login sessions permitted on each ENode. Limiting the number of login sessions can prevent login session rejections caused when the connected FC switch port configuration limits the number of FIP login sessions.

The maximum number of FIP sessions per ENode is 2000 sessions (FLOGI plus FDISC sessions). The limit you set applies to every ENode in the specified gateway fabric. Each ENode in the fabric can have up to the maximum number of sessions, but the total number of active sessions cannot exceed the session limits you apply to the fabric or the Node device.

There are also configurable FIP login session limits that you can apply to the gateway FC fabric, to the QFX3500 switch or QFabric system Node device, and to the interfaces in each FC fabric.

- To set a maximum number of FIP login sessions per ENode using the CLI:

```
[edit fc-fabrics fc-fabric-name protocols fip]  
user@switch# set max-sessions-per-enode max-login-sessions
```

For example, to configure the ENodes on an FC fabric named **sanfab1** with a maximum FIP login session limit of **250** sessions:

```
[edit fc-fabrics sanfab1]  
user@switch# set protocols fip max-sessions-per-enode 250
```

- Related Documentation**
- [Setting the Maximum Number of FIP Login Sessions per FC Interface on page 4593](#)
  - [Setting the Maximum Number of FIP Login Sessions per FC Fabric on page 4594](#)
  - [Setting the Maximum Number of FIP Login Sessions per Node Device on page 4595](#)
  - [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)



## Setting the Maximum Number of FIP Login Sessions per FC Interface

When the switch acts as an FCoE-FC gateway, NP\_Ports are the native FC interfaces the gateway uses to connect to the FC switch. You can limit the maximum number of FIP login sessions permitted on an NP\_Port interface. Limiting the number of login sessions on an interface can prevent login session rejections caused when the connected FC switch port configuration limits the number of FIP login sessions.



**TIP:** A good practice is to configure a maximum number of login sessions on each NP\_Port that is less than or equal to the maximum number of login sessions permitted on the connected FC switch port.

The maximum number of FIP sessions is 2500 sessions. (This is the combined total of all VN2VF\_Port and VN2VN\_Port sessions on the system.)

There are also configurable FIP login session limits that you can apply to the gateway FC fabric, to the QFX3500 switch or QFabric system Node device, and to the ENodes in each FC fabric. To prevent unexpected FIP login rejections, the sum of the maximum FIP login sessions on all of the NP\_Port interfaces that belong to an FC fabric should not exceed the maximum number of sessions the FC fabric supports or the device supports.

- To set a maximum number of FIP login sessions on an NP\_Port using the CLI:

```
[edit fc-fabrics fc-fabric-name interface interface-name]
user@switch# set max-login-sessions max-login-sessions
```

For example, to configure NP\_Port interface **fc-0/0/5** with a maximum FIP login session limit of **500** sessions on an FC fabric named **sanfab1**:

```
[edit fc-fabrics sanfab1]
user@switch# set interface fc-0/0/5 max-login-sessions 500
```

### Related Documentation

- [Setting the Maximum Number of FIP Login Sessions per ENode on page 4592](#)
- [Setting the Maximum Number of FIP Login Sessions per FC Fabric on page 4594](#)
- [Setting the Maximum Number of FIP Login Sessions per Node Device on page 4595](#)
- [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)



## Setting the Maximum Number of FIP Login Sessions per FC Fabric

When the QFX Series acts as an FCoE-FC gateway, you configure at least one local FC fabric on the gateway. A gateway FC fabric creates associations that connect FCoE devices on an Ethernet network to an FC switch on a Fibre Channel network. Each FC fabric on a gateway includes native FC interfaces (NP\_Ports) that connect the gateway to the FC switch. When FCoE devices want to log in to the FC switch, the gateway sends the FIP login requests to the FC switch on the NP\_Port links.

You can limit the maximum number of FIP login sessions permitted on a gateway FC fabric. If a QFX3500 switch or QFabric system Node device has more than one FC fabric, limiting the number of login sessions on an FC fabric can prevent one FC fabric from using all of the login sessions available on the device.

The maximum number of FIP sessions is 2500 sessions. (This is the combined total of all VN2VF\_Port and VN2VN\_Port sessions on the system.)

There are also configurable FIP login session limits that you can apply to the FC fabric NP\_Port interfaces, to the QFX3500 switch or QFabric system Node device, and to the ENodes in each FC fabric. To prevent unexpected FIP login rejections:

- The sum of the maximum FIP login sessions on all of the NP\_Port interfaces that belong to an FC fabric should not exceed the maximum number of sessions the FC fabric supports or the device supports.
- The sum of the maximum FIP login sessions on all of the FC fabrics on a device should not exceed the maximum number of sessions per device.
- To set a maximum number of FIP login sessions on an FC fabric using the CLI:

```
[edit fc-fabrics fc-fabric-name]  
user@switch# set max-login-sessions max-login-sessions
```

For example, to configure an FC fabric named **sanfab1** with a maximum FIP login session limit of **2000** sessions:

```
[edit fc-fabrics sanfab1]  
user@switch# set fc-fabrics sanfab1 max-login-sessions 2000
```

### Related Documentation

- [Setting the Maximum Number of FIP Login Sessions per ENode on page 4592](#)
- [Setting the Maximum Number of FIP Login Sessions per FC Interface on page 4593](#)
- [Setting the Maximum Number of FIP Login Sessions per Node Device on page 4595](#)
- [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)



## Setting the Maximum Number of FIP Login Sessions per Node Device

When a QFX3500 switch or QFabric system Node device acts as an FCoE-FC gateway, it connects FCoE devices on an Ethernet network to an FC switch in a Fibre Channel network. You can limit the maximum number of FIP login sessions for the FCoE devices on each Node device.

For QFX3500 switches, the maximum limit means that the sum of the FIP login sessions on all of the local FC fabrics on that QFX3500 switch cannot exceed the device maximum.

For the QFabric system, the limit applies to each Node device in the QFabric system. For example, if you configure a maximum FIP login session value of 2000 sessions, each Node device in the QFabric system can have a total of up to 2000 FIP login sessions running on its FC fabrics.

The maximum number of FIP sessions a device can support is 2500 sessions. (This is the combined total of all VN2VF\_Port and VN2VN\_Port sessions on the system.)

There are also configurable FIP login session limits that you can apply to the FC fabrics on the devices, to the NP\_Port interfaces in each FC fabric, and to the ENodes in each FC fabric. To prevent unexpected FIP login rejections:

- The sum of the maximum FIP login sessions for all of the FC fabrics on a device should not exceed the maximum number of sessions per device.
- The sum of the maximum FIP login sessions on all of the NP\_Port interfaces that belong to an FC fabric should not exceed the maximum number of sessions the FC fabric supports or the device supports.
- To set a maximum number of FIP login sessions for Node devices using the CLI:

[edit **fc-options**]

```
user@switch# set max-login-sessions-per-node max-login-sessions-per-node
```

For example, to configure a maximum FIP login limit of **2000** sessions on a QFX3500 switch or on all Node devices in a QFabric system:

[edit **fc-options**]

```
user@switch# set max-login-sessions-per-node 2000
```

### Related Documentation

- [Setting the Maximum Number of FIP Login Sessions per ENode on page 4592](#)
- [Setting the Maximum Number of FIP Login Sessions per FC Interface on page 4593](#)
- [Setting the Maximum Number of FIP Login Sessions per FC Fabric on page 4594](#)
- [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)



## Configuring VN2VF\_Port FIP Snooping on an FCoE Transit Switch

VN\_Port to VF\_Port (VN2VF\_Port) Fibre Channel over Ethernet (FCoE) Initialization Protocol (FIP) snooping uses information gathered during FIP discovery and login to create firewall filters that provide security against unauthorized access to the FC switch or FCoE forwarder (FCF) through the EX4500 or QFX Series when the switch is acting as an FCoE transit switch. The firewall filters allow only FCoE devices that succeed at logging in to the FC fabric to access the FCF through the transit switch. VN2VF\_Port FIP snooping provides security for the point-to-point virtual links that connect host FCoE Nodes (ENodes) and FCFs in the FCoE VLAN by denying access to any device that does not successfully log in to the FCF.

VN2VF\_Port FIP snooping is disabled by default. You enable VN2VF\_Port FIP snooping on a per-VLAN basis for VLANs that carry FCoE traffic. Ensure that a VLAN that carries FCoE traffic carries only FCoE traffic, because enabling VN2VF\_Port FIP snooping denies access for all other Ethernet traffic.



**NOTE:** All of the transit switch ports are untrusted by default. If an ENode on an FCoE device logs in to an FCF before you enable VN2VF\_Port FIP snooping on the VLAN and you then enable VN2VF\_Port FIP snooping, the transit switch denies traffic from the ENode because the transit switch has not snooped (learned) the ENode state. The following process automatically logs the ENode back in to the FCF to reestablish the connection:

1. VN2VF\_Port FIP snooping is enabled on an FCoE VLAN on the switch.
2. The switch denies existing connections between servers and the FCF on the FCoE VLAN by filtering the FCoE traffic and FIP traffic, so no keepalive messages from the ENodes reach the FCF.
3. The FCF port timer for each ENode and for each VN\_Port on each ENode expires.
4. The FCF sends each ENode whose port timer has expired a Clear Virtual Links (CVL) message.
5. The CVL message causes the ENode to log in again.

Because the FCF is a trusted source, you configure interfaces that connect to the FCF as trusted interfaces. VN2VF\_Port FIP snooping continues to run on trusted interfaces so that the switch learns the FCF state.





**NOTE:** Do not configure ENode-facing interfaces both with FIP snooping enabled and as trusted interfaces. FCoE VLANs with interfaces that are directly connected to FCoE hosts should be configured with FIP snooping enabled and the interfaces should not be trusted interfaces. Ethernet interfaces that are connected to an FCF should be configured as trusted interfaces and should not have FIP snooping enabled. Interfaces that are connected to a transit switch that is performing FIP snooping can be configured as trusted interfaces if the FCoE VLAN is not enabled for FIP snooping.

Optionally, you can specify an FC-MAP value for each FCoE VLAN. On a given FCoE VLAN, the switch learns only FCFs that have a matching FC-MAP value. The default FC-MAP value is 0EFC00h for all FC devices. (Enter hexadecimal values for FC-MAP preceded by the hexadecimal indicator “0x”—for example, 0x0EFC00.) If you change the FC-MAP value of an FCF, change the FC-MAP value for the FCoE VLAN it belongs to on the switch and on the servers you want to communicate with the FCF. An FCoE VLAN can have one and only one FC-MAP value.

To enable VN2VF\_Port FIP snooping:

- To enable VN2VF\_Port FIP snooping on a single VLAN and specify the optional FC-MAP value:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan vlan-name examine-fip fc-map fc-map-value
```

For example, to enable VN2VF\_Port FIP snooping on a VLAN named **san1\_vlan** and change the FC-MAP value to **0x0EFC03**:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan san1_vlan examine-fip fc-map 0x0EFC03
```



**NOTE:** Changing the FC-MAP value causes all logins to drop and forces ENodes to log in again.

- To enable VN2VF\_Port FIP snooping on all VLANs and use the default FC-MAP value:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan all examine-fip
```

- To configure an interface as a trusted interface:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface interface-name fcoe-trusted
```

For example, to configure interface **xe-0/0/30** as a trusted interface:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface xe-0/0/30 fcoe-trusted
```

#### Related Documentation

- Example: Configuring an FCoE Transit Switch
- Understanding FIP Snooping



- [Understanding VN\\_Port to VF\\_Port FIP Snooping on an FCoE Transit Switch on page 4448](#)

## Disabling VN2VF\_Port FIP Snooping on an FCoE-FC Gateway Switch Interface

When the switch acts as an FCoE-FC gateway, the FCoE-network-facing Ethernet interfaces in the FCoE VLAN are automatically enabled for VN\_Port to VF\_Port (VN2VF\_Port) FIP snooping. You can disable VN2VF\_Port FIP snooping on an individual Ethernet interface or you can disable VN2VF\_Port FIP snooping globally for all Ethernet interfaces in a gateway Fibre Channel (FC) fabric.

Disable VN2VF\_Port FIP snooping on an Ethernet interface by configuring it as an FCoE trusted interface. Disable VN2VF\_Port FIP snooping on all Ethernet interfaces in an FC fabric by configuring the FC fabric as FCoE trusted.

Do not disable VN2VF\_Port FIP snooping on an interface unless you are certain that the interface is connected to a trusted device. Do not disable VN2VF\_Port FIP snooping on an FC fabric unless all of the FCoE-network-facing interfaces in the fabric are either connected to a transit switch that is performing VN2VF\_Port FIP snooping on the FCoE devices as they log in to the FC network or all of the interfaces are connected to trusted devices.

VN2VF\_Port FIP snooping installs firewall filters that block FIP and FCoE frames from sources that have not logged in to the switch and prevents unauthorized access to the network. Disabling VN2VF\_Port FIP snooping disables these firewall filters and permits access to all FIP and FCoE frames transported on that interface.

- To disable VN2VF\_Port FIP snooping on an FCoE-device-facing Ethernet interface in an FCoE VLAN, configure that interface as a trusted interface:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface interface-name fcoe-trusted
```

For example, to configure interface *xe-0/0/7* as a trusted FC interface:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface xe-0/0/7 fcoe-trusted
```

- To disable VN2VF\_Port FIP snooping on all FCoE-device-facing interfaces in a gateway FC fabric, configure that fabric as a trusted fabric:

```
[edit]
user@switch# set fc-fabrics fabric-name protocols fip fcoe-trusted
```

For example, to configure an FC fabric named *santastic* as an FCoE trusted fabric:

```
[edit]
user@switch# set fc-fabrics santastic protocols fip fcoe-trusted
```

### Related Documentation

- [Configuring VN2VF\\_Port FIP Snooping on an FCoE Transit Switch on page 4596](#)
- [Understanding VN\\_Port to VF\\_Port FIP Snooping on an FCoE Transit Switch on page 4448](#)
- [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)
- [Understanding an FCoE-FC Gateway on page 4399](#)



## Enabling VN2VN\_Port FIP Snooping and Configuring the Beacon Period on an FCoE Transit Switch

VN\_Port to VN\_Port (VN2VN\_Port) FIP snooping on an FCoE transit switch provides security to help prevent unauthorized access and data transmission on a bridge that connects ENodes in the Ethernet network. VN2VN\_Port FIP snooping provides security for virtual links by creating filters based on information gathered (snooped) about FCoE devices during FIP transactions.

VN2VN\_Port FIP snooping is conceptually similar to VN2VF\_Port FIP snooping between VN\_Ports and VF\_Ports, but VN2VN\_Port FIP snooping does not require traffic between VN\_Ports to traverse the Fibre Channel (FC) switch or FCoE forwarder (FCF). Instead, a VN\_Port communicates transparently through the transit switch on a virtual link that emulates a direct connection to the VN\_Port at the other end of the virtual link.

VN2VN\_Port FIP snooping is disabled by default. You enable VN2VN\_Port FIP snooping on a per-VLAN basis on VLANs that carry VN2VN\_Port FCoE traffic. Ensure that the VLAN carries only FCoE traffic between VN\_Ports, because enabling VN2VN\_Port FIP snooping denies access for all other traffic, including VN2VF\_Port FIP snooping traffic.

All ENodes that you want to communicate using VN2VN\_Port FIP snooping must use an FCoE VLAN dedicated to VN2VN\_Port traffic. You cannot mix VN2VN\_Port FIP snooping traffic with VN2VF\_Port FIP snooping traffic in the same FCoE VLAN.



**NOTE:** An FCoE VLAN can support either VN2VF\_Port FIP snooping or VN2VN\_Port FIP snooping, but not both. Configure separate FCoE VLANs for VN2VF\_Port FIP snooping traffic and for VN2VN\_Port FIP snooping traffic. On FCoE VLANs that are configured as VN2VN\_Port FIP snooping VLANs, VN2VF\_Port traffic is dropped.

The *beacon period* is conceptually similar to the FIP keepalive period (timer) for VN2VF\_Port FIP snooping virtual link maintenance. The beacon period performs virtual link maintenance for VN2VN\_Port FIP snooping. It is the time interval between messages that verify the connection is still valid and the device at the other end of the virtual link is still reachable. You set the beacon period value for each FCoE VLAN that you configure to do VN2VN\_Port FIP snooping.



**NOTE:** In addition to enabling VN2VN\_Port FIP snooping and configuring the beacon period, you must also configure a dedicated FCoE VLAN for the VN2VN\_Port traffic, and set the FCoE transit switch ports in the proper port mode and trusted or untrusted state (interfaces are untrusted by default). See the VN2VN\_Port FIP snooping configuration example topics for complete configurations of several common network topologies.



To enable VN2VN\_Port FIP snooping and set the beacon period on an FCoE VLAN that is dedicated to VN2VN\_Port traffic:

- [edit ethernet-switching-options secure-access-port]  
user@switch# **set vlan *vlan-name* examine-fip examine-vn2vn beacon-period *milliseconds***

For example, to enable VN2VN\_Port FIP snooping on a VLAN named **vlan200** and set the beacon period to **90000** milliseconds:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan vlan200 examine-fip examine-vn2vn beacon-period 90000
```

#### Related Documentation

- [Example: Configuring VN2VN\\_Port FIP Snooping \(FCoE Hosts Directly Connected to the Same FCoE Transit Switch\) on page 4551](#)
- [Example: Configuring VN2VN\\_Port FIP Snooping \(FCoE Hosts Directly Connected to Different FCoE Transit Switches\) on page 4555](#)
- [Example: Configuring VN2VN\\_Port FIP Snooping \(FCoE Hosts Indirectly Connected Through an Aggregation Layer FCoE Transit Switch\) on page 4563](#)
- [Configuring VN2VF\\_Port FIP Snooping on an FCoE Transit Switch on page 4596](#)
- [Understanding VN\\_Port to VN\\_Port FIP Snooping on an FCoE Transit Switch on page 4454](#)

## Configuring the DCBX Mode

You can configure the DCBX mode that an interface uses to communicate with the connected peer. QFX Systems support three DCBX modes:

- Autonegotiation—The interface negotiates with the connected peer to determine the DCBX mode. This is the default DCBX mode.
- IEEE DCBX—The interface uses IEEE DCBX type, length, and value (TLV) to exchange DCBX information with the connected peer. QFX3500 Node devices come up with IEEE DCBX enabled by default and then autonegotiate with the connected peer to determine the final DCBX mode.
- DCBX Version 1.01—The interface uses Converged Enhanced Ethernet (CEE) DCBX version 1.01 TLVs to exchange DCBX information with the connected peer. QFabric Node devices come up with DCBX version 1.01 enabled by default and then autonegotiate with the connected peer to determine the final DCBX mode.



**NOTE:** QFX Systems do not support pre-CEE (pre-DCB) versions of DCBX such as DCBX version 1.00. If a QFX Series interface receives an LLDP frame with pre-CEE DCBX TLVs, the system drops the frame.

Configure the DCBX mode by specifying the mode for one interface or for all interfaces.

- To configure the DCBX mode, specify the interface and the mode:

```
[edit protocols dcbx]
user@switch# set interface interface-name mode (auto-negotiate | ieee-dcbx |
dcbx-version-1.01)
```



For example, to configure DCBX version 1.01 on interface **xe-0/0/21**:

```
user@switch# set protocols dcbx interface xe-0/0/21 mode dcbx-version-1.01
```

To configure IEEE DCBX on all interfaces:

```
user@switch# set protocols dcbx interface all mode ieee-dcbx
```

#### Related Documentation

- [Configuring DCBX Autonegotiation on page 4601](#)
- [Disabling the ETS Recommendation TLV on page 4604](#)
- [Understanding DCBX on page 4463](#)
- [Understanding DCBX Application Protocol TLV Exchange on page 4472](#)
- [show dcbx neighbors on page 4694](#)

## Configuring DCBX Autonegotiation

Data Center Bridging Capability Exchange protocol (DCBX) discovers the data center bridging (DCB) capabilities of peers by exchanging feature configuration information. DCBX also detects feature misconfiguration and mismatches, and can configure DCB on peers. DCBX is an extension of the Link Layer Discovery Protocol (LLDP), and LLDP must remain enabled on every interface for which you want to use DCBX. If you attempt to enable DCBX on an interface on which LLDP is disabled, the configuration commit operation fails.



**NOTE:** LLDP and DCBX are enabled by default on all interfaces.

The switch supports DCBX autonegotiation for:

- Priority-based flow control (PFC) configuration
- Layer 2 and Layer 4 applications such as Fibre Channel over Ethernet (FCoE) and Internet Small Computer System Interface (iSCSI)
- Enhanced transmission selection (ETS) advertisement

DCBX autonegotiation is configured on a per-interface basis for each supported feature or application. The PFC and application DCBX exchanges use autonegotiation by default. The default autonegotiation behavior is:

- DCBX is enabled on the interface if the connected peer device also supports DCBX.
- DCBX is disabled on the interface if the connected peer device does not support DCBX.

You can override the default behavior for each feature by turning off autonegotiation to force an interface to enable or disable the feature.

Autonegotiation of ETS means that when ETS is enabled on an interface (priority groups are configured), the interface advertises its ETS configuration to the peer device. In this case, priorities (forwarding classes) that are not part of a priority group (forwarding class set) receive no bandwidth and are advertised in an automatically generated default



forwarding class. If ETS is not enabled on an interface (no priority groups are configured), all of the priorities are advertised in one automatically generated default priority group that receives 100 percent of the port bandwidth.

Disabling ETS autonegotiation prevents the interface from sending the Recommendation TLV or the Configuration TLV to the connected peer.

On interfaces that use IEEE DCBX mode to exchange DCBX parameters, you can disable autonegotiation of the enhanced transmission selection (ETS) Recommendation TLV to the peer if you want an asymmetric ETS configuration between the peers. DCBX still exchanges the ETS Configuration TLV if you disable the ETS Recommendation TLV.

Autonegotiation of PFC means that when PFC is enabled on an interface, if the peer device connected to the interface supports PFC and is provisioned compatibly with the switch, DCBX sets the PFC operational state to enabled. If the peer device connected to the interface does not support PFC or is not provisioned compatibly with the switch, DCBX sets the operational state to disabled.

In addition, if the peer advertises that it is “willing” to learn its PFC configuration from the switch, DCBX pushes the switch’s PFC configuration to the peer and does not check the peer’s administrative state. The switch does not learn PFC configuration from peers (the switch does not advertise its state as “willing”).

Disabling PFC autonegotiation prevents the interface from exchanging PFC configuration information with the peer. It forces the interface to enable PFC if PFC is configured on the interface or to disable PFC if PFC is not configured on the interface. If you disable PFC autonegotiation, the assumption is that the peer is also configured manually.

Autonegotiation of applications depends on whether or not you apply an application map to an interface. If you apply an application map to an interface, the interface autonegotiates DCBX for each application in the application map. PFC must be enabled on the FCoE priority (the FCoE IEEE 802.1p code point) for the interface to advertise the FCoE application. The interface only advertises applications that are included in the application map.

For example, if you apply an application map to an interface and the application map does not include the FCoE application, then that interface does not perform DCBX advertisement of FCoE.

If you do not apply an application map to an interface, DCBX does not advertise applications on that interface, with the exception of FCoE, which is handled differently than other applications.





**NOTE:** If you do not apply an application map to an interface, the interface performs autonegotiation of FCoE if the interface carries traffic in the FCoE forwarding class and also has PFC enabled on the FCoE priority. On such interfaces, if DCBX detects that the peer device connected to the interface supports FCoE, the switch advertises its FCoE capability and IEEE 802.1p code point on that interface. If DCBX detects that the peer device connected to the interface does not support FCoE, DCBX marks that interface as “FCoE down” and disables FCoE on the interface.

When DCBX marks an interface as “FCoE down,” the behavior of the switch depends on how you use it in the network:

- When the switch acts as an FCoE-FC gateway, it does not send or receive FCoE Initialization Protocol (FIP) packets.
- When the switch acts as an FCoE transit switch, the interface drops all of the FIP packets it receives. In addition, FIP packets received from an FCoE forwarder (FCF) are not forwarded to interfaces marked as “FCoE down.”

Disabling autonegotiation prevents the interface from exchanging application information with the peer. In this case, the assumption is that the peer is also configured manually.

To disable DCBX autonegotiation of PFC, applications (including FCoE), and ETS using the CLI:

1. Turn off autonegotiation for PFC.

```
[edit]
user@switch# set protocols dcbx interface interface-name priority-flow-control
no-auto-negotiation
```

2. Turn off autonegotiation for applications.

```
[edit]
user@switch# set protocols dcbx interface interface-name applications no-auto-negotiation
```

3. Turn off autonegotiation for ETS.

```
[edit]
user@switch# set protocols dcbx interface interface-name enhanced-transmission-selection
no-auto-negotiation
```

To disable autonegotiation of the ETS Recommendation TLV so that DCBX exchanges only the ETS Configuration TLV:

- [edit protocols dcbx interface *interface-name*]  
user@switch# set enhanced-transmission-selection recommendation-tlv no-auto-negotiate

#### Related Documentation

- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)
- [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)
- [Disabling the ETS Recommendation TLV on page 4604](#)
- [Understanding DCBX Application Protocol TLV Exchange on page 4472](#)



- Using DCBX Protocol to Lower Costs

## Disabling the ETS Recommendation TLV

The enhanced transmission selection (ETS) Recommendation TLV communicates the ETS settings that the switch wants the connected peer interface to use. If the peer interface is “willing,” the peer interface changes its configuration to match the configuration in the ETS Recommendation TLV. By default, the switch interfaces send the ETS Recommendation TLV to the peer. The settings communicated are the egress ETS settings defined by configuring hierarchical scheduling on the interface.

We recommend that you use the same ETS settings on the connected peer that you use on the switch interface and that you leave the ETS Recommendation TLV enabled. However, on interfaces that use IEEE DCBX as the DCBX mode, if you want an asymmetric configuration between the switch interface and the connected peer, you can disable the ETS Recommendation TLV.



**NOTE:** Disabling the ETS Recommendation TLV on interfaces that use DCBX version 1.01 as the DCBX mode has no effect and does not change DCBX behavior.

If you disable the ETS Recommendation TLV, the switch still sends the ETS Configuration TLV to the connected peer. The result is that the connected peer is informed about the switch DCBX ETS configuration, but even if the peer is “willing,” the peer does not change its configuration to match the switch configuration. This is asymmetric configuration—the two interfaces can have different parameter values for the ETS attribute.

To disable the ETS Recommendation TLV:

- [edit protocols dcbx interface *interface-name*]  
user@switch# **set enhanced-transmission-selection recommendation-tlv no-auto-negotiate**

### Related Documentation

- [Configuring the DCBX Mode on page 4600](#)
- [Configuring DCBX Autonegotiation on page 4601](#)
- [Understanding DCBX on page 4463](#)
- [Understanding Data Center Bridging Capability Exchange Protocol for EX Series Switches](#)

## Defining an Application for DCBX Application Protocol TLV Exchange

Define each application for which you want DCBX to exchange application protocol information. You can define Layer 2 and Layer 4 applications. After you define applications, you map them to IEEE 802.1p code points, and then apply the application map to the interfaces on which you want DCBX to exchange application protocol information with connected peers. (See *Related Documentation* for how to configure application maps



and apply them to interfaces, and for an example of the entire procedure that also includes classifier configuration.)



**NOTE:** In Junos OS Release 12.1, the FCoE application was configured by default, so you did not need to configure it in an application map. In Junos OS Release 12.2, if you want DCBX to advertise the FCoE application on an interface and you apply an application map to that interface, you must explicitly configure FCoE in the application map. You also must enable priority-based flow control (PFC) on the FCoE code point on all interfaces that you want to advertise FCoE. If you apply an application map to an interface, the interface sends DCBX TLVs only for the applications configured in the application map.

Define Layer 2 applications by mapping an application name to an EtherType. Define Layer 4 applications by mapping an application name to a protocol (TCP or UDP) and a destination port.

- To define a Layer 2 application, specify the name of the application and its EtherType:

```
[edit applications]
user@switch# set application application-name ether-type ether-type
```

For example, to configure an application named **PTP** (for Precision Time Protocol) that uses the EtherType **0x88F7**:

```
user@switch# set applications application ptp ether-type 0x88F7
```

- To define a Layer 4 application, specify the name of the application, its protocol (TCP or UDP), and its destination port:

```
[edit]
user@switch# set applications application application-name protocol (tcp | udp)
destination-port port-value
```

For example, to configure an application named **iscsi** (for Internet Small Computer System Interface) that uses the protocol **TCP** and the destination port **3260**:

```
user@switch# set applications application iscsi protocol tcp destination-port 3260
```

#### Related Documentation

- [Configuring an Application Map for DCBX Application Protocol TLV Exchange on page 4606](#)
- [Applying an Application Map to an Interface for DCBX Application Protocol TLV Exchange on page 4607](#)
- [Configuring DCBX Autonegotiation on page 4601](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)
- [Example: Configuring DCBX to Support an iSCSI Application](#)
- [Understanding DCBX Application Protocol TLV Exchange on page 4472](#)
- [show dcbx neighbors on page 4694](#)



## Configuring an Application Map for DCBX Application Protocol TLV Exchange

After you define applications for which you want to exchange DCBX application protocol information, map the applications to IEEE 802.1p code points. The IEEE 802.1p code points identify incoming traffic and allow you to map that traffic to the desired application. You then apply the application map to the interfaces on which you want DCBX to exchange application protocol information with connected peers. (See *Related Documentation* for how to define applications and apply the application map to interfaces, and for an example of the entire procedure that also includes classifier configuration.)



**NOTE:** In Junos OS Release 12.1, the FCoE application was configured by default, so you did not need to configure it in an application map. In Junos OS Release 12.2, if you want DCBX to advertise the FCoE application on an interface and you apply an application map to that interface, you must explicitly configure FCoE in the application map. You also must enable priority-based flow control (PFC) on the FCoE code point on all interfaces that you want to advertise FCoE. If you apply an application map to an interface, the interface sends DCBX TLVs only for the applications configured in the application map.

Configure an application map by creating an application map name and mapping an application to one or more IEEE 802.1p code points.

- To define an application map, specify the name of the application map, the name of the application, and the IEEE 802.1p code points of the incoming traffic that you want to associate with the application in the application map:

```
[edit policy-options]
user@switch# set application-maps application-map-name application application-name
code-points [ aliases ] [ bit-patterns ]
```

For example, to configure an application map named **ptp-app-map** that includes an application named **PTP** (for Precision Time Protocol) and map the application to IEEE 802.1p code points **001** and **101**:

```
user@switch# set policy-options application-maps ptp-app-map application ptp code points
[ 001 101 ]
```

### Related Documentation

- [Defining an Application for DCBX Application Protocol TLV Exchange on page 4604](#)
- [Applying an Application Map to an Interface for DCBX Application Protocol TLV Exchange on page 4607](#)
- [Configuring DCBX Autonegotiation on page 4601](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)
- [Example: Configuring DCBX to Support an iSCSI Application](#)
- [show dcbx neighbors on page 4694](#)



## Applying an Application Map to an Interface for DCBX Application Protocol TLV Exchange

After you define applications and map them to IEEE 802.1p code points in an application map, apply the application map to the interfaces on which you want DCBX to exchange the application protocol information with connected peers. (See *Related Documentation* for how to define applications and configure application maps to interfaces, and for an example of the entire procedure that also includes classifier configuration.)



**NOTE:** In Junos OS Release 12.1, the FCoE application was configured by default, so you did not need to configure it in an application map. In Junos OS Release 12.2, if you want DCBX to advertise the FCoE application on an interface and you apply an application map to that interface, you must explicitly configure FCoE in the application map. You also must enable priority-based flow control (PFC) on the FCoE code point on all interfaces that you want to advertise FCoE. If you apply an application map to an interface, the interface sends DCBX TLVs only for the applications configured in the application map.

- To apply an application map to a DCBX interface, specify the DCBX interface and the application map name:

```
[edit protocols]
```

```
user@switch# set dcbx interface interface-name application-map application-map-name
```

For example, to apply an application map named **ptp-app-map** on interface **xe-0/0/11**:

```
user@switch# set protocols dcbx interface xe-0/0/11 application-map ptp-app-map
```

### Related Documentation

- [Defining an Application for DCBX Application Protocol TLV Exchange on page 4604](#)
- [Configuring an Application Map for DCBX Application Protocol TLV Exchange on page 4606](#)
- [Configuring DCBX Autonegotiation on page 4601](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)
- [Example: Configuring DCBX to Support an iSCSI Application](#)
- [show dcbx neighbors on page 4694](#)



## Configuration Statements

---

### application (Application Maps)

---

<b>Syntax</b>	<pre>application <i>application-name</i> {     <i>code-points</i> [ <i>aliases</i> ] [ <i>bit-patterns</i> ]; }</pre>
<b>Hierarchy Level</b>	[edit policy-options <b>application-maps</b> <i>application-map-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Add an application to an application map and define the application's code points.
<b>Options</b>	<i>application-name</i> —Name of the application.  The remaining statement is explained separately.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring an Application Map for DCBX Application Protocol TLV Exchange on page 4606</a></li><li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li><li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li></ul>



## application (Applications)

---

<b>Syntax</b>	<pre> application <i>application-name</i> {     <i>destination-port</i> <i>port-value</i>;     <i>protocol</i> (tcp   udp);     <i>ether-type</i> <i>type</i>; } </pre>
<b>Hierarchy Level</b>	[edit applications]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Configure properties to define an application.
<b>Options</b>	<p><i>application-name</i>—Name of the application.</p> <p>The statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Defining an Application for DCBX Application Protocol TLV Exchange on page 4604</a></li> <li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li> <li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li> <li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li> <li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li> </ul>



## application-map

---

<b>Syntax</b>	<code>application-map <i>application-map-name</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">protocols dcbx interface interface-name</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Specify an application map to apply to an interface.
<b>Options</b>	<i>application-map-name</i> —Name of the application map.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show dcbx neighbors on page 4694</a></li><li>• <a href="#">Applying an Application Map to an Interface for DCBX Application Protocol TLV Exchange on page 4607</a></li><li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li><li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li></ul>



## application-maps

---

<b>Syntax</b>	<pre> application-maps <i>application-map-name</i> {   application <i>application-name</i> {     code-points [ <i>aliases</i> ] [ <i>bit-patterns</i> ];   } } </pre>
<b>Hierarchy Level</b>	[edit policy-options]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Define an application map by specifying the applications that belong to the application map.
<b>Options</b>	<p><i>application-map-name</i>—Name of the application map.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring an Application Map for DCBX Application Protocol TLV Exchange on page 4606</a></li> <li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li> <li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li> <li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li> <li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li> </ul>



## applications (Applications)

---

<b>Syntax</b>	<pre>applications {   application application-name {     destination-port port-value;     protocol (tcp   udp);     ether-type type;   } }</pre>
<b>Hierarchy Level</b>	[edit]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Define applications that DCBX advertises.
<b>Options</b>	The statements are explained separately.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Defining an Application for DCBX Application Protocol TLV Exchange on page 4604</a></li><li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li><li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li></ul>



## applications (DCBX)

<b>Syntax</b>	<code>applications {     no-auto-negotiation; }</code>
<b>Hierarchy Level</b>	[edit <code>protocols dcbx interface interface-name</code> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series. Statement introduced in Junos OS Release 12.1 for the EX Series
<b>Description</b>	Configure Data Center Bridging Capability Exchange protocol (DCBX) applications on an interface.
<b>Options</b>	The remaining statements are explained separately.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show dcbx neighbors on page 4694</a></li> <li>• <a href="#">Understanding DCB Features and Requirements on page 4389</a></li> </ul>

## auto-load-rebalance

<b>Syntax</b>	<code>auto-load-rebalance;</code>
<b>Hierarchy Level</b>	[edit <code>fc-fabrics fabric-name proxy</code> ]
<b>Release Information</b>	Command introduced in Junos OS Release 12.3 for the QFX Series.
<b>Description</b>	Configure the system to rebalance NP_Port link loads automatically on an FCoE-FC gateway proxy fabric if the link loads become unbalanced. Load rebalancing is a disruptive action that forces some or all sessions (depending on the configured load-balancing algorithm) to log out and then log in again. When sessions log in again, they are placed on NP_Port interfaces so that the link loads are balanced.
<b>Required Privilege Level</b>	storage—To view this statement in the configuration. storage-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Defining the Proxy Load-Balancing Algorithm on page 4586</a></li> <li>• <a href="#">Example: Configuring Automated Fibre Channel Interface Load Rebalancing on page 4572</a></li> <li>• <a href="#">Simulating On-Demand Fibre Channel Link Load Rebalancing (Dry Run Test) on page 4588</a></li> <li>• <a href="#">Understanding Load Balancing in an FCoE-FC Gateway Proxy Fabric on page 4431</a></li> <li>• <a href="#">Monitoring Fibre Channel Interface Load Balancing on page 4665</a></li> </ul>



## bb-sc-n

---

<b>Syntax</b>	<code>bb-sc-n <i>bb-sc-n</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">fibrechannel-options</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the buffer-to-buffer credit state change number to prevent the permanent loss of Fibre Channel credits over time (buffer-to-buffer credit recovery).
<b>Options</b>	<p><i>bb-sc-n</i>—Number of buffer-to-buffer state change credits.</p> <p><b>Range:</b> 0 through 15</p> <p><b>Default:</b> 0 (disabled)</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show fibre-channel interfaces on page 4751</a></li><li>• <a href="#">Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495</a></li><li>• <a href="#">Configuring a Fibre Channel Interface on page 4579</a></li><li>• <a href="#">Configuring a Physical Fibre Channel Interface on page 4578</a></li><li>• <a href="#">Understanding Interfaces on an FCoE-FC Gateway on page 4420</a></li></ul>



## beacon-period

<b>Syntax</b>	<code>beacon-period <i>milliseconds</i></code>
<b>Hierarchy Level</b>	[edit ethernet-switching options secure-access-port vlan (all   <i>vlan-name</i> ) <a href="#">examine-fip</a> <a href="#">examine-vn2vn</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	<p>Set the interval between periodic beacons. Beacons perform virtual link maintenance for VN_Ports in a way that is similar to FIP keepalive advertisements.</p> <p>The ENode sends periodic beacons every 90 seconds on behalf of the VN_Port. Each received beacon resets the session timer for the virtual link connection to the other VN_Port. If the FCF does not receive a beacon before the beacon timer expires, the VN_Port is considered as “down” and the virtual link is terminated. The beacon timer expires in 2.5 times the configured beacon timer value.</p>
<b>Options</b>	<p><i>milliseconds</i>—Time in milliseconds between beacons.</p> <p><b>Range:</b> 250 through 90000 milliseconds</p> <p><b>Default:</b> 8000 milliseconds</p>
<b>Required Privilege Level</b>	<p>storage—To view this statement in the configuration.</p> <p>storage-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring VN2VN_Port FIP Snooping (FCoE Hosts Directly Connected to the Same FCoE Transit Switch) on page 4551</a></li> <li>• <a href="#">Example: Configuring VN2VN_Port FIP Snooping (FCoE Hosts Directly Connected to Different FCoE Transit Switches) on page 4555</a></li> <li>• <a href="#">Example: Configuring VN2VN_Port FIP Snooping (FCoE Hosts Indirectly Connected Through an Aggregation Layer FCoE Transit Switch) on page 4563</a></li> </ul>



## code-points (Application Maps)

---

<b>Syntax</b>	<code>code-points [ <i>aliases</i> ] [ <i>bit-patterns</i> ];</code>
<b>Hierarchy Level</b>	[edit policy-options <b>application-maps</b> <i>application-map-name</i> <b>application</b> <i>application-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Define one or more code-point aliases or bit sets for an application.
<b>Options</b>	<i>aliases</i> —Name of the alias or aliases.  <i>bit-patterns</i> —Value of the code-point bits, in decimal form.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring an Application Map for DCBX Application Protocol TLV Exchange on page 4606</a></li><li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li><li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li></ul>



## dcbx

<b>Syntax</b>	<pre> dcbx {   disable;   interface (<i>interface-name</i>   all) {     disable;     application-map <i>application-map-name</i>;     applications {       no-auto-negotiation;     }     enhanced-transmission-selection {       no-auto-negotiation;       recommendation-tlv {         no-auto-negotiation;       }     }     mode (auto-negotiate   ieee-dcbx   dcbx-version-1.01);     priority-flow-control {       no-auto-negotiation;     }   } } </pre>
<b>Hierarchy Level</b>	[edit <a href="#">protocols</a> ]
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 11.3 for EX Series switches.</p> <p><b>mode</b> and <b>recommendation-tlv</b> statements introduced in Junos OS Release 12.2 for the QFX Series.</p>
<b>Description</b>	Configure DCBX properties.
<b>Options</b>	The statements are explained separately.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show dcbx neighbors on page 4694</a></li> <li>• <a href="#">Understanding DCB Features and Requirements on page 4389</a></li> <li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li> <li>• Understanding DCB Features and Requirements on EX Series Switches</li> <li>• Disabling DCBX to Disable PFC Autonegotiation on EX Series Switches (CLI Procedure)</li> </ul>




## description (Fibre Channel Fabrics)

---

<b>Syntax</b>	<code>description <i>description</i></code>
<b>Hierarchy Level</b>	[edit <a href="#">fc-fabrics</a> <i>fabric-name</i> ]
<b>Description</b>	Text string that describes the Fibre Channel fabric. The text string has no effect on the operation of the fabric.
<b>Options</b>	<b><i>description</i></b> —Text that describes the fabric. Text can include letters, numbers, and hyphens (-) and can be up to 255 characters in length. If the text includes spaces, enclose the entire text string in quotation marks.
<b>Required Privilege Level</b>	storage—To view this statement in the configuration. storage-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show fibre-channel fabric on page 4718</a></li></ul>



## destination-port (Applications)

<b>Syntax</b>	<code>destination-port <i>port-value</i>;</code>
<b>Hierarchy Level</b>	[edit applications <b>application</b> <i>application-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Transmission Control Protocol (TCP) or User Datagram Protocol (UDP) destination port number, which combines with <b>protocol</b> to identify an application type. The Internet Assigned Numbers Authority (IANA) assigns port numbers. See the IANA <i>Service Name and Transport Protocol Port Number Registry</i> at <a href="http://www.iana.org/assignments/service-names-port-numbers/service-names-port-numbers.xml">http://www.iana.org/assignments/service-names-port-numbers/service-names-port-numbers.xml</a> for a list of assigned port numbers.
<div>  <p><b>NOTE:</b> To create an application for iSCSI, use the protocol <b>tcp</b> with the destination port number <b>3260</b>.</p> </div>	
<b>Options</b>	<i>port-value</i> —Identifier for the port.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Defining an Application for DCBX Application Protocol TLV Exchange on page 4604</a></li> <li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li> <li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li> <li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li> <li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li> </ul>



## disable (DCBX)

---

<b>Syntax</b>	disable
<b>Hierarchy Level</b>	[edit <a href="#">protocols dcbx</a> ]  [edit <a href="#">protocols dcbx interface</a> <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series. Statement introduced in Junos OS Release 11.3 for EX Series switches.
<b>Description</b>	Disable Data Center Bridging Capability Exchange protocol (DCBX) on one or more 10-Gigabit Ethernet interfaces.
<b>Default</b>	DCBX is enabled by default on all 10-Gigabit or higher Ethernet interfaces.  DCBX is enabled by default on all 10-Gigabit Ethernet interfaces on EX4500 CEE-enabled switches.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li><li>• <a href="#">Disabling DCBX to Disable PFC Autonegotiation on EX Series Switches (CLI Procedure)</a></li><li>• <a href="#">Understanding DCB Features and Requirements on page 4389</a></li><li>• <a href="#">Understanding DCB Features and Requirements on EX Series Switches</a></li></ul>




## enhanced-transmission-selection

<b>Syntax</b>	<pre> enhanced-transmission-selection {   no-auto-negotiation;   recommendation-tlv {     no-auto-negotiation;   } } </pre>
<b>Hierarchy Level</b>	[edit <a href="#">protocols dcbx interface</a> <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Disable advertising the enhanced transmission selection (ETS) state of the interface to the peer. To disable ETS on the interface, do not enable ETS on the interface in the class-of-service (CoS) configuration.</p> <p>Disabling ETS autonegotiation stops the QFX Series from advertising the ETS Configuration TLV and the ETS Recommendation TLV.</p>
<b>Options</b>	<b>no-auto-negotiate</b> —Disable automatic negotiation of priority-based flow control (PFC)
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show dcbx neighbors on page 4694</a></li> <li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li> <li>• <a href="#">Example: Configuring CoS Hierarchical Port Scheduling (ETS) on page 4962</a></li> <li>• <a href="#">Understanding DCB Features and Requirements on page 4389</a></li> </ul>



## ether-type

---

<b>Syntax</b>	<code>ether-type <i>ether-type</i>;</code>
<b>Hierarchy Level</b>	[edit applications <a href="#">application</a> <i>application-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Two-octet field in an Ethernet frame that defines the protocol encapsulated in the frame payload. See <a href="http://standards.ieee.org/develop/regauth/ethertype/eth.txt">http://standards.ieee.org/develop/regauth/ethertype/eth.txt</a> for a list of Institute of Electrical and Electronics Engineers (IEEE) EtherTypes.
<div> <b>NOTE:</b> To create a FIP application, use the EtherType 0x8914.</div>	
<b>Options</b>	<i>type</i> —Identifier for the EtherType.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Defining an Application for DCBX Application Protocol TLV Exchange on page 4604</a></li><li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li></ul>



## examine-fip

<b>Syntax</b>	<pre>examine-fip {   examine-vn2vn {     beacon-period <i>milliseconds</i>;   }   fc-map <i>fc-map-value</i>; }</pre>
<b>Hierarchy Level</b>	[edit ethernet-switching-options secure-access-port vlan (all   <i>vlan-name</i> )]
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 10.4 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Statement <b>examine-vn2vn</b> introduced in Junos OS Release 12.2 for the QFX Series.</p>
<b>Description</b>	<p>Enable FIP snooping on a specified VLAN. Ensure that the VLAN is a dedicated FCoE VLAN that transports only FCoE traffic.</p> <p>(QFX Series only) Enable VN_Port to VN_Port (VN2VN_Port) FIP snooping on a specified VLAN. The VLAN must be a dedicated FCoE VLAN that transports only VN2VN_Port traffic. One FCoE VLAN cannot support both VN_Port to VF_Port (VN2VF_Port) FIP snooping and VN2VN_Port FIP snooping. Configure separate, dedicated FCoE VLANs for VN2VN_Port FIP snooping and VN2VN_Port FIP snooping.</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>vlan</li> <li>Example: Configuring an FCoE Transit Switch</li> <li><a href="#">Configuring VN2VF_Port FIP Snooping on an FCoE Transit Switch on page 4596</a></li> </ul>



## examine-vn2vn

---

<b>Syntax</b>	<code>examine-vn2vn {     beacon-period milliseconds; }</code>
<b>Hierarchy Level</b>	[edit ethernet-switching options secure-access-port vlan (all   <i>vlan-name</i> ) <b>examine-fip</b> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	<p>Enable VN_Port to VN_Port (VN2VN) FIP snooping on a specified VLAN. The VLAN must be a dedicated FCoE VLAN that transports only FCoE traffic. A VLAN cannot support VN2VN FIP snooping and VN_Port to VF_Port FIP snooping (VN2VF) simultaneously. Configure separate VLANs for VN2VN FIP snooping and VN2VF FIP snooping.</p> <p>When you enable VN2VN FIP snooping on a VLAN, the VN2VF session filters are removed and the all existing VN2VF sessions are terminated.</p> <p>The remaining statement is explained separately.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring VN2VN_Port FIP Snooping (FCoE Hosts Directly Connected to the Same FCoE Transit Switch) on page 4551</a></li><li>• <a href="#">Example: Configuring VN2VN_Port FIP Snooping (FCoE Hosts Directly Connected to Different FCoE Transit Switches) on page 4555</a></li><li>• <a href="#">Example: Configuring VN2VN_Port FIP Snooping (FCoE Hosts Indirectly Connected Through an Aggregation Layer FCoE Transit Switch) on page 4563</a></li></ul>



## fabric-id

---

<b>Syntax</b>	<code>fabric-id <i>fc-fabric-id</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">fc-fabrics</a> <i>fc-fabric-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure a unique identifier for the FC fabric.



**NOTE:** Changing the ID of an FC fabric causes all logins to drop and forces the ENodes to log in again.

<b>Options</b>	<i>fc-fabric-id</i> —Unique identifier of the FC fabric.
<b>Required Privilege Level</b>	storage—To view this statement in the configuration. storage-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fibre-channel fabric on page 4718</a></li> <li>• <a href="#">Configuring an FCoE-FC Gateway Fibre Channel Fabric on page 4576</a></li> <li>• <a href="#">Understanding an FCoE-FC Gateway on page 4399</a></li> </ul>

## fabric-type

---

<b>Syntax</b>	<code>fabric-type proxy;</code>
<b>Hierarchy Level</b>	[edit <a href="#">fc-fabrics</a> <i>fc-fabric-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify that the FC fabric be an FCoE-FC gateway fabric.
<b>Options</b>	<i>proxy</i> —Specify that the switch be an FCoE-FC gateway fabric.
<b>Required Privilege Level</b>	storage—To view this statement in the configuration. storage-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fibre-channel fabric on page 4718</a></li> <li>• <a href="#">Configuring an FCoE-FC Gateway Fibre Channel Fabric on page 4576</a></li> <li>• <a href="#">Understanding an FCoE-FC Gateway on page 4399</a></li> </ul>



## family fcoe

---

<b>Syntax</b>	<pre>family fcoe {     oxid (enable   disable); }</pre>
<b>Hierarchy Level</b>	[edit forwarding-options hash-key]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.3 for the QFX Series.
<b>Description</b>	Configure whether or not to use the originator exchange identifier (OxID) field for hash control for FCoE traffic load balancing.
<b>Options</b>	The statement is explained separately.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Enabling and Disabling CoS OxID Hash Control on page 4589</a></li><li>• <a href="#">Understanding OxID Hash Control for FCoE Traffic Load Balancing on page 4447</a></li></ul>

## fc2

---

<b>Syntax</b>	<pre>fc2 {     traceoptions {         file <i>filename</i> &lt;replace&gt; &lt;size <i>size</i>&gt; &lt;files <i>number</i>&gt; &lt;no-stamp&gt;;         &lt;world-readable   no-world-readable&gt;;         flag <i>flag</i> &lt;flag-modifier&gt;;     } }</pre>
<b>Hierarchy Level</b>	[edit <b>fc-fabrics</b> <i>fc-fabric-name</i> ]
<b>Description</b>	Fibre Channel network layer (FC2) configuration.
<b>Options</b>	The statements are explained separately.
<b>Required Privilege Level</b>	storage—To view this statement in the configuration. storage-control—To add this statement to the configuration.



## fc-fabrics

```

Syntax  fc-fabrics {
        fc-fabric-name {
            description
            fabric-id fc-fabric-id;
            fabric-type proxy;
            interface {
                interface-name {
                    max-login-sessions max-login-sessions;
                }
                interface-name {
                    max-login-sessions max-login-sessions;
                }
                <...>;
                max-login-sessions max-login-sessions;
            }
            vlan.interface-name;
        }
        fc2 {
            traceoptions {
                file filename <replace> <size size> <files number> <no-stamp>;
                <world-readable | no-world-readable>;
                flag flag <flag-modifier>;
            }
        }
        max-login-sessions max-login-sessions;
        protocols {
            fip {
                fcoe-trusted;
                fc-map fc-map-value;
                fka-adv-period milliseconds;
                interface {
                    interface-name {
                        fka-adv-period milliseconds;
                        priority priority;
                    }
                }
                max-sessions-per-enode max-sessions-per-enode;
                priority priority;
                traceoptions {
                    file filename <replace> <size size> <files number> <no-stamp>;
                    <world-readable | no-world-readable>;
                    flag flag <flag-modifier> <disable>;
                }
            }
        }
        proxy {
            auto-load-rebalance
            load-balance-algorithm (simple | enode-based | flogi-based);
            no-fabric-wwn-verify;
            traceoptions {
                file filename <replace> <size size> <files number> <no-stamp>;
                <world-readable | no-world-readable>;
            }
        }
    }

```



```
        flag flag <flag-modifier> <disable>;
    }
}
}
```

**Hierarchy Level** [edit]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure an FC fabric. You can configure a maximum of 12 FC fabrics, one per native FC port.



.....  
**NOTE:** Changing the name of an FC fabric causes all logins to drop and forces the ENodes to log in again.  
.....

**Options** *fc-fabric-name* —Unique name of the FC fabric.

The other statements are explained separately.


**Required Privilege Level** storage—To view this statement in the configuration.  
storage-control—To add this statement to the configuration.

**Related Documentation**

- [show fibre-channel fabric on page 4718](#)
- [Configuring VN2VF\\_Port FIP Snooping on an FCoE Transit Switch on page 4596](#)
- [Configuring a Physical Fibre Channel Interface on page 4578](#)
- [Configuring a Fibre Channel Interface on page 4579](#)
- [Configuring an FCoE VLAN Interface on page 4582](#)
- [Assigning Interfaces to a Fibre Channel Fabric on page 4584](#)
- [Configuring an FCoE-FC Gateway Fibre Channel Fabric on page 4576](#)
- [Configuring FIP on an FCoE-FC Gateway on page 4589](#)
- [Configuring DCBX Autonegotiation on page 4601](#)
- [Overview of Fibre Channel on the QFX Series on page 4380](#)
- [Understanding FCoE-FC Gateway Functions on page 4403](#)



## fc-map

<b>Syntax</b>	<code>fc-map <i>fc-map-value</i>;</code>
<b>Hierarchy Level</b>	<p>[edit ethernet-switching options secure-access-port vlan (all   <i>vlan-name</i>) <a href="#">examine-fip</a>]</p> <p>For the QFX Series only:</p> <p>[edit <a href="#">fc-fabrics</a> <i>fc-fabric-name</i> <a href="#">protocols fip</a>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 10.4 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>
<b>Description</b>	<p>Set the FCoE mapped address prefix (FC-MAP) value for the FCoE VLAN to match the FC switch (or FCoE forwarder) FC-MAP value for the FC fabric. The FC-MAP value is a unique MAC address prefix an FC switch uses to identify FCoE traffic for a given FC fabric (traffic on a particular FCoE VLAN).</p> <p>You can configure the FC-MAP value or use the default value. The FC switch provides the FC-MAP value to FCoE nodes (ENodes) in the FIP discovery advertisement message. If the EX Series switch or the QFX Series FCoE VLAN FC-MAP value does not match the FC switch FC-MAP value, neither device discovers the FC switch on that VLAN, and the ENodes on that VLAN cannot access the FC switch. The FC switch accepts only FCoE traffic that uses the correct FC-MAP value as part of the VN_Port MAC address.</p> <p>When the QFX Series acts as an FCoE-FC gateway, the FC-MAP value for the gateway and the FCoE devices must match the FC switch FC-MAP value in order to communicate with the FC switch.</p>
	<div>  <p><b>NOTE:</b> Changing the FC-MAP value causes all logins to drop and forces the ENodes to log in again.</p> </div>
<b>Options</b>	<p><b><i>fc-map-value</i></b>—FC-MAP value, hexadecimal value preceded by “0x”.</p> <p><b>Range:</b> 0x0EFC00 through 0x0EFCFF</p> <p><b>Default:</b> 0xEFC00</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">examine-fip on page 4242</a></li> <li>• <a href="#">show fip snooping on page 4770</a></li> <li>• Example: Configuring an FCoE Transit Switch</li> <li>• <a href="#">Configuring VN2VF_Port FIP Snooping on an FCoE Transit Switch on page 4596</a></li> </ul>



## fc-options

---

<b>Syntax</b>	<code>fc-options</code> <code>max-login-sessions-per-node</code> <i>max-login-sessions-per-node</i> ; <code>traceoptions</code> { file <i>filename</i> <replace> <size <i>size</i> > <files <i>number</i> > <no-stamp>; <world-readable   no-world-readable>; flag <i>flag</i> < <i>flag-modifier</i> > <disable>; }
<b>Hierarchy Level</b>	[edit]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Set Fibre Channel options.
<b>Required Privilege Level</b>	storage—To view this statement in the configuration. storage-control—To add this statement to the configuration.



## fcoe-trusted

---

<b>Syntax</b>	fcoe-trusted;
<b>Hierarchy Level</b>	<p>[edit ethernet-switching-options secure-access-port interface <i>interface-name</i>]</p> <p>For the QFX Series only:</p> <p>[edit fc-fabrics <i>fc-fabric-name</i> protocols fip]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 10.4 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Statement introduced for the FC fabric in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	<p>Configure the specified 10-Gigabit Ethernet interface to trust Fibre Channel over Ethernet (FCoE) traffic. If an interface is connected to another switch such as an FCoE forwarder (FCF) or a transit switch, you can configure the interface as trusted so that the interface forwards FCoE traffic from the switch to the FCoE devices without installing FIP snooping filters.</p> <p>(QFX Series only) Configure the specified local Fibre Channel fabric to trust FCoE traffic on all ports in the fabric. Changing the fabric ports from untrusted to trusted removes any existing FIP snooping filters from the ports. Changing the fabric ports from trusted to untrusted by removing the <b>fcoe-trusted</b> configuration from the fabric forces all of the FCoE sessions on those ports to log out so that when the ENodes and VN_Ports log in again, the switch can build the appropriate FIP snooping filters.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fip snooping on page 4770</a></li> <li>• <a href="#">Example: Configuring an FCoE Transit Switch</a></li> <li>• <a href="#">Configuring VN2VF_Port FIP Snooping on an FCoE Transit Switch on page 4596</a></li> </ul>



## fibre-channel (Family Interfaces)

---

<b>Syntax</b>	<code>fibre-channel {     port-mode (f-port   np-port); }</code>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> vlan <a href="#">unit</a> <i>logical-unit-number</i> <a href="#">family</a> ], [edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">unit</a> <i>logical-unit-number</i> <a href="#">family</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the port mode for FCoE VLAN interfaces and native FC interfaces.
<b>Options</b>	The statements are explained separately.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495</a></li><li>• <a href="#">Configuring an FCoE VLAN Interface on page 4582</a></li><li>• <a href="#">Configuring a Fibre Channel Interface on page 4579</a></li><li>• <a href="#">show fibre-channel interfaces on page 4751</a></li><li>• <a href="#">show vlans on page 1752</a></li><li>• <a href="#">Understanding Interfaces on an FCoE-FC Gateway on page 4420</a></li></ul>



## fibre-channel (Port)

<b>Syntax</b>	<pre>fibre-channel {   port-range {     port-range-low port-range-high;   } }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">chassis fpc fpc-id pic pic-id</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Specify a range of ports to carry FC traffic when the switch is configured as an FCoE-FC gateway.
<b>Options</b>	The statement is explained separately.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495</a></li> <li>• <a href="#">Configuring a Physical Fibre Channel Interface on page 4578</a></li> <li>• <a href="#">show fibre-channel interfaces on page 4751</a></li> <li>• <a href="#">Understanding Interfaces on an FCoE-FC Gateway on page 4420</a></li> </ul>

## fibrechannel-options

<b>Syntax</b>	<pre>fibrechannel-options {   bb-sc-n   (loopback   no-loopback);   speed (auto-negotiation   2g   4g   8g); }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces interface-name</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure FC interface properties such as speed and loopback mode.
<b>Options</b>	The statements are explained separately.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fibre-channel interfaces on page 4751</a></li> <li>• <a href="#">Configuring a Fibre Channel Interface on page 4579</a></li> </ul>



## fip

---

**Syntax**    `fip {  
          fcoe-trusted;  
          fc-map fc-map-value;  
          fka-adv-period milliseconds;  
          interface {  
            interface-name {  
              fka-adv-period milliseconds;  
              priority priority;  
            }  
          }  
          max-sessions-per-enode max-sessions-per-enode;  
          priority priority;  
          traceoptions {  
            file filename <replace> <size size> <files number> <no-stamp>;  
            <world-readable | no-world-readable>;  
            flag flag <flag-modifier> <disable>;  
          }  
          }  
          }`

**Hierarchy Level**    [edit `fc-fabrics` *fc-fabric-name* `protocols`]

**Release Information**    Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Configure global or interface-specific FIP options. Individual interface settings override global settings.

**Options**    The statements are explained separately.

**Required Privilege Level**    storage—To view this statement in the configuration.  
                                  storage-control—To add this statement to the configuration.

**Related Documentation**

- [show fibre-channel fip on page 4724](#)
- [Configuring FIP on an FCoE-FC Gateway on page 4589](#)
- [Overview of FIP on page 4384](#)



## fka-adv-period

---

<b>Syntax</b>	fka-adv-period <i>milliseconds</i> ;
<b>Hierarchy Level</b>	[edit <a href="#">fc-fabrics</a> <i>fc-fabric-name</i> <a href="#">protocols</a> <a href="#">fip</a> ], [edit <a href="#">fc-fabrics</a> <i>fc-fabric-name</i> <a href="#">protocols</a> <a href="#">fip</a> <a href="#">interface</a> <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Set the global or interface-specific interval between periodic FIP keepalive advertisements. An interval set at the interface level overrides the global setting.
<b>Options</b>	<i>milliseconds</i> —Time in milliseconds between FIP keepalive advertisements. <b>Range:</b> 250 through 90000 milliseconds <b>Default:</b> 8000 milliseconds
<b>Required Privilege Level</b>	storage—To view this statement in the configuration. storage-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fibre-channel fip on page 4724</a></li> <li>• <a href="#">show fibre-channel fip interface on page 4739</a></li> <li>• <a href="#">Overview of FIP on page 4384</a></li> </ul>



## interface (DCBX)

---

Syntax	<pre>interface (<i>interface-name</i>   all) {   disable;   application-map <i>application-map-name</i>;   applications {     no-auto-negotiation;   }   enhanced-transmission-selection {     no-auto-negotiation;     recommendation-tlv {       no-auto-negotiation;     }   }   mode (auto-negotiate   ieee-dcbx   dcbx-version-1.01);   priority-flow-control {     no-auto-negotiation;   } }</pre>
Hierarchy Level	[edit <a href="#">protocols dcbx</a> ]
Release Information	<p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 11.3 for the EX Series switches.</p> <p><b>Mode</b> and <b>recommendation-tlv</b> statements introduced in Junos OS Release 12.2 for the QFX Series.</p>
Description	Configure DCBX properties on an interface.
Options	<p><b><i>interface-name</i></b>—Name of the interface.</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">show dcbx neighbors on page 4694</a></li><li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li><li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li><li>• <a href="#">Understanding DCB Features and Requirements on page 4389</a></li><li>• <a href="#">Understanding DCB Features and Requirements on EX Series Switches</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li></ul>



## interface (Fibre Channel Fabric)

<b>Syntax</b>	<pre> interface {     interface-name {         max-login-sessions max-login-sessions;     }     interface-name {         max-login-sessions max-login-sessions;     }     &lt;...&gt; {         max-login-sessions max-login-sessions;     }     vlan.interface-name; } </pre>
<b>Hierarchy Level</b>	[edit <a href="#">fc-fabrics</a> <i>fc-fabric-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Associate one or more native Fibre Channel (FC) interfaces with an FC fabric and one VLAN interface for FCoE traffic. An FC interface can be associated with only one FC fabric.
<b>Options</b>	<p><b><i>interface-name</i></b>—Name of the native FC interface. You can assign one or more FC interfaces to an FC fabric.</p> <p><b><i>vlan.vlan-interface-name</i></b>—Name of the VLAN interface for FCoE traffic. You can assign one VLAN interface to an FC fabric.</p> <p>The remaining statement is explained separately.</p>
<b>Required Privilege Level</b>	<p>storage—To view this statement in the configuration.</p> <p>storage-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495</a></li> <li>• <a href="#">Configuring a Fibre Channel Interface on page 4579</a></li> <li>• <a href="#">Configuring a Physical Fibre Channel Interface on page 4578</a></li> <li>• <a href="#">Configuring an FCoE VLAN Interface on page 4582</a></li> <li>• <a href="#">Understanding Interfaces on an FCoE-FC Gateway on page 4420</a></li> </ul>



## interface (FIP)

---

<b>Syntax</b>	<pre>interface {     <i>interface-name</i> {         <i>fka-adv-period</i> <i>milliseconds</i>;         <i>priority</i> <i>priority</i>;     } }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">fc-fabrics</a> <i>fc-fabric-name</i> <a href="#">protocols fip</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure FIP options on a per-interface basis. (Override global FIP configuration for a specified interface.)
<b>Options</b>	<p><i>interface-name</i>—Name of the interface.</p> <p>The statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>storage—To view this statement in the configuration.</p> <p>storage-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show fibre-channel fip on page 4724</a></li><li>• <a href="#">Configuring FIP on an FCoE-FC Gateway on page 4589</a></li><li>• <a href="#">Overview of FIP on page 4384</a></li></ul>



## load-balance-algorithm

<b>Syntax</b>	load-balance-algorithm (simple   enode-based   flogi-based);
<b>Hierarchy Level</b>	[edit <b>fc-fabrics</b> <i>fabric-name</i> <b>proxy</b> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Set the load-balancing algorithm that the QFX Series uses to distribute FCoE sessions (FLOGI and FDISC sessions from the FCoE devices in the Ethernet network) among the NP_Port links to the FC switch.



**NOTE:** Changing the load-balancing algorithm when FCoE sessions are running forces the FCoE sessions to log out, then log in again.

<b>Options</b>	<p><b>simple</b>—Load balancing is based on the weighted utilization (load) of the NP_Ports connected to an FC fabric. Each new FLOGI or FDISC is assigned to the least-loaded link. When a link load rebalance occurs, the system minimizes disruption by using an algorithm to log out only the sessions that need to be moved to other links to balance the link load. To further minimize disruption, the algorithm logs out the sessions with the fewest dependencies (for example, FDISC sessions are logged out before FLOGI sessions). When the sessions log in again, they are placed on NP_Port interfaces in a manner that balances the link loads. This is the default load-balancing algorithm.</p> <p><b>enode-based</b>—Load balancing is based on the ENode FLOGI. When an ENode logs in to the fabric, all subsequent FDISC sessions (VN_Port sessions) associated with that ENode are placed on the same link as the ENode FLOGI session, regardless of the link load. New ENode FLOGIs are placed on the least-loaded link. When a link load rebalance occurs, the system logs off all sessions. The sessions log in again and are placed on NP_Port interfaces in a balanced manner.</p> <p><b>flogi-based</b>—FLOGI-based load balancing is similar to ENode-based load balancing, but the behavior when the loads are rebalanced is different. Load balancing is based on the ENode FLOGI. When an ENode logs in to the fabric, all subsequent FDISC sessions associated with that ENode are placed on the same link as the ENode FLOGI session, regardless of the link load. New ENode FLOGIs are placed on the least-loaded link. When a link load rebalance occurs, the system minimizes disruption by using an algorithm to log out only the sessions that need to be moved to other links to balance the link load. When the logged out sessions log back in, they are placed on NP_Port interfaces in a manner that balances the link loads.</p>
<b>Required Privilege Level</b>	<p>storage—To view this statement in the configuration.</p> <p>storage-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Defining the Proxy Load-Balancing Algorithm on page 4586</a></li> <li>• <a href="#">Example: Configuring Automated Fibre Channel Interface Load Rebalancing on page 4572</a></li> </ul>



- [Simulating On-Demand Fibre Channel Link Load Rebalancing \(Dry Run Test\) on page 4588](#)
- [Monitoring Fibre Channel Interface Load Balancing on page 4665](#)
- [Understanding Load Balancing in an FCoE-FC Gateway Proxy Fabric on page 4431](#)

---

## loopback (Fibre Channel Interface)

---

<b>Syntax</b>	(loopback   no-loopback);
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">fibrechannel-options</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Enable or disable loopback mode for FC interfaces.
<b>Default</b>	By default, loopback mode is disabled on FC interfaces.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show fibre-channel interfaces on page 4751</a></li><li>• <a href="#">Configuring a Fibre Channel Interface on page 4579</a></li></ul>




## max-login-sessions

<b>Syntax</b>	<code>max-login-sessions <i>max-login-sessions</i>;</code>
<b>Hierarchy Level</b>	<code>[edit <a href="#">fc-fabrics</a> <i>fc-fabric-name</i>];</code> <code>[edit <a href="#">fc-fabrics</a> <i>fc-fabric-name</i> <a href="#">interface</a> <i>interface-name</i>];</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	<p>Set the maximum number of FCoE initialization protocol (FIP) session logins permitted for an individual NP_Port interface in an FCoE-FC gateway fabric (FC fabric) or for the entire FCoE-FC gateway fabric. You can set a maximum FIP session limit for each NP_Port interface connected to an FC switch. You can also set a maximum FIP session limit for the entire FC fabric. The sum of the maximum login sessions permitted on the NP_Port interfaces in an FC fabric should not exceed the maximum login sessions configured for that FC fabric.</p> <p>The maximum number of FIP sessions (the combined total of all VN2VF_Port and VN2VN_Port sessions on the system) is 2500 sessions.</p>
<b>Options</b>	<p><i>max-login-sessions</i>—Maximum number of FIP login sessions.</p> <p><b>Range:</b> 128 through 2500</p> <p><b>Default:</b> 2500</p>
<b>Required Privilege Level</b>	<p>storage—To view this statement in the configuration.</p> <p>storage-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">max-login-sessions-per-node on page 4642</a></li> <li>• <a href="#">Setting the Maximum Number of FIP Login Sessions per FC Interface on page 4593</a></li> <li>• <a href="#">Setting the Maximum Number of FIP Login Sessions per FC Fabric on page 4594</a></li> <li>• <a href="#">Understanding Interfaces on an FCoE-FC Gateway on page 4420</a></li> </ul>




## max-login-sessions-per-node

---

<b>Syntax</b>	<code>max-login-sessions-per-node</code> <i>max-login-sessions-per-node</i> ;
<b>Hierarchy Level</b>	[edit <a href="#">fc-options</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	<p>Set the maximum number of FCoE initialization protocol (FIP) session logins permitted on a Node device. (This is the combined total of all VN2VF_Port and VN2VN_Port sessions on the Node device.)</p> <p>On a QFX3500 switch, the <b>max-login-sessions-per-node</b> command sets the maximum FIP session login limit for all of the FC fabrics configured on the device. The combined number of FIP sessions on all FC fabrics on the device should not exceed this limit.</p> <p>On a QFabric system, the <b>max-login-sessions-per-node</b> command globally sets the maximum FIP session login limit for each QFabric system Node device in the QFabric system. For example, if you set the Node limit to 2000 login sessions, then each QFabric Node device supports up to 2000 FIP login sessions. The total configured maximum number of login sessions of all of the FC fabrics on a Node device should not exceed the Node session limit.</p>
	<div><p><b>NOTE:</b> FIP login session limits configured at the FC fabric level or at the FC fabric interface level might limit a Node device to fewer total sessions than the configured Node limit.</p></div>
<b>Options</b>	<p><b>max-login-sessions-per-node</b>—Maximum number of FIP login sessions.</p> <p><b>Range:</b> 128 through 2500</p> <p><b>Default:</b> 2500</p>
<b>Required Privilege Level</b>	<p>storage—To view this statement in the configuration.</p> <p>storage-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">max-login-sessions on page 4641</a></li><li>• <a href="#">Setting the Maximum Number of FIP Login Sessions per Node Device on page 4595</a></li><li>• <a href="#">Understanding Interfaces on an FCoE-FC Gateway on page 4420</a></li></ul>



## max-sessions-per-enode

<b>Syntax</b>	<code>max-sessions-per-enode <i>max-sessions-per-enode</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">fc-fabrics</a> <i>fc-fabric-name</i> <a href="#">protocols</a> <a href="#">fip</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Set the maximum number of FCoE login sessions (FLOGI plus FDISC) from a single ENode allowed on the gateway FC fabric (the fabric configured on the QFabric system). The maximum number of logins per ENode is 2000 sessions.
	<div>  <p><b>NOTE:</b> A session is a FLOGI or FDISC login to the FC SAN fabric. Session does not refer to end-to-end storage sessions. There is no limit to the number of end-to-end storage sessions.</p> </div>
<b>Options</b>	<p><b><i>max-sessions-per-enode</i></b>—Maximum number of FCoE sessions a single ENode can establish on the switch.</p> <p><b>Range:</b> 32 through 2000</p> <p><b>Default:</b> 32</p>
<b>Required Privilege Level</b>	<p><b>storage</b>—To view this statement in the configuration.</p> <p><b>storage-control</b>—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">fcoe-trusted on page 4244</a></li> <li>• <a href="#">show fibre-channel fip on page 4724</a></li> <li>• <a href="#">Configuring FIP on an FCoE-FC Gateway on page 4589</a></li> <li>• <a href="#">Understanding FIP Parameters on an FCoE-FC Gateway on page 4416</a></li> </ul>




## mode (DCBX)

---

<b>Syntax</b>	<code>mode (auto-negotiate   ieee-dcbx   dcbx-version-1.01);</code>
<b>Hierarchy Level</b>	[edit <a href="#">protocols dcbx interface</a> (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.2 for the QFX Series.
<b>Description</b>	<p>Set the DCBX mode for the specified interface or interfaces.</p> <p>QFX3500 switches come up in IEEE DCBX mode and then autonegotiate with the connected peer to set the DCBX mode.</p> <p>QFabric system Node devices come up in version 1.01 DCBX mode and then autonegotiate with the connected peer to set the DCBX mode.</p>
<b>Default</b>	The default DCBX mode is autonegotiation.
<b>Options</b>	<p><b>auto-negotiate</b>—Automatically negotiate the DCBX mode with the connected peer.</p> <p><b>ieee-dcbx</b>—Force the interface to use IEEE DCBX mode, regardless of the peer configuration.</p> <p><b>dcbx-version-1.01</b>—Force the interface to use version 1.01 DCBX mode, regardless of the peer configuration.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show dcbx neighbors on page 4694</a></li><li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li><li>• <a href="#">Understanding DCBX on page 4463</a></li></ul>



## no-fabric-wwn-verify

<b>Syntax</b>	no-fabric-wwn-verify;
<b>Hierarchy Level</b>	[edit <a href="#">fc-fabrics</a> <i>fabric-name</i> <a href="#">proxy</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Disable the fabric worldwide name (WWN) verification check in the fabric login accept message (FLOGI-ACC) for implicit FLOGIs. If you enable this option, when a QFX Series NP_Port performs a FLOGI to the FC fabric, the QFX Series does not verify the fabric WWN in the FLOGI-ACC against the current fabric WWN.
	<div>  <p><b>NOTE:</b> Disabling or enabling the fabric WWN verification check logs out all FCoE sessions.</p> </div>
<b>Default</b>	Disabled. By default, all implicit FLOGIs from the QFX Series NP_Ports to the FC fabric are verified against the current fabric WWN.
<b>Required Privilege Level</b>	storage—To view this statement in the configuration. storage-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fibre-channel proxy fabric-state on page 4757</a></li> <li>• <a href="#">Understanding FCoE-FC Gateway Functions on page 4403</a></li> </ul>



## oxid

---

<b>Syntax</b>	oxid (enable   disable)
<b>Hierarchy Level</b>	[edit forwarding-options hash-key <a href="#">family fcoe</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.3 for the QFX Series.
<b>Description</b>	Enable or disable whether the switch uses the originator exchange identifier (OxID) field for hash control for FCoE traffic load balancing.
<b>Default</b>	OxID hash control is enabled by default.
<b>Options</b>	<b>oxid (enable   disable)</b> —Enable or disable whether the switch uses the OxID hash control field for FCoE traffic load balancing.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Enabling and Disabling CoS OxID Hash Control on page 4589</a></li><li>• <a href="#">Understanding OxID Hash Control for FCoE Traffic Load Balancing on page 4447</a></li></ul>



## policy-options

```
Syntax  policy-options
        application-maps application-map-name {
            application application-name {
                code-points [ aliases ] [ bit-patterns ];
            }
        }
        policy-statement policy-name {
            term term-name {
                from {
                    family family-name;
                    match-conditions;
                    policy subroutine-policy-name;
                    prefix-list prefix-list-name;
                    prefix-list-filter prefix-list-name match-type <actions>;
                    route-filter destination-prefix match-type <actions>;
                    source-address-filter source-prefix match-type <actions>;
                }
                to {
                    match-conditions;
                    policy subroutine-policy-name;
                }
                then actions;
            }
        }
    }
```

**Hierarchy Level** [edit]

**Release Information** Statement introduced in Junos OS Release 12.1 for the QFX Series.  
Statement introduced in Junos OS Release 12.1 for the EX Series.

**Description** Configure options such as application maps for DCBX application protocol exchange and policy statements.

**Required Privilege Level** storage—To view this statement in the configuration.  
storage-control—To add this statement to the configuration.

**Related Documentation**

- [Defining an Application for DCBX Application Protocol TLV Exchange on page 4604](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)
- [Example: Configuring DCBX to Support an iSCSI Application](#)
- [Understanding DCBX Application Protocol TLV Exchange on page 4472](#)
- [Understanding DCBX Application Protocol TLV Exchange on EX Series Switches](#)




## port-mode (Fibre Channel Interfaces)

---

<b>Syntax</b>	<code>port-mode (f-port   np-port);</code>
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>vlan</i> <a href="#">unit</a> <i>unit</i> <a href="#">family</a> <i>fibre-channel</i> ], [edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">unit</a> <i>logical-unit-number</i> <a href="#">family</a> <i>fibre-channel</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure the FCoE VLAN interface port mode to F_Port to connect the switch to FCoE initiators, or configure the native FC interface port mode to proxy N_Port (NP_Port) to connect the switch to an FC switch fabric port (F_Port).
<b>Options</b>	<b>f-port</b> —Configure an FCoE VLAN interface to connect to FCoE initiator Virtual N_Ports (VN_Ports).  <b>np-port</b> —Configure a native FC port to connect to an FC switch F_Port.
<b>Required Privilege Level</b>	<b>routing</b> —To view this statement in the configuration. <b>routing-control</b> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show fibre-channel interfaces on page 4751</a></li><li>• <a href="#">Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495</a></li><li>• <a href="#">Configuring an FCoE VLAN Interface on page 4582</a></li><li>• <a href="#">Configuring a Fibre Channel Interface on page 4579</a></li><li>• <a href="#">Understanding Interfaces on an FCoE-FC Gateway on page 4420</a></li></ul>



## port-range

<b>Syntax</b>	<code>port-range <i>port-range-low</i> <i>port-range-high</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">chassis fpc</a> <i>fpc-id</i> <a href="#">pic</a> <i>pic-id</i> <a href="#">fibre-channel</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	<p>Configure a contiguous block of ports as FC ports. You can configure the FC-capable ports xe-0/0/0 through xe-0/0/5 as fc-0/0/0 through fc-0/0/5, and ports xe-0/0/42 through xe-0/0/47 as fc-0/0/42 through fc-0/0/47 to create blocks of native FC interfaces. You cannot individually configure a single port as a native FC interface. Within these port blocks, you cannot mix FC interfaces with Ethernet interfaces. All of the ports in a block must be either native FC interfaces or Ethernet interfaces.</p> <p>You can configure:</p> <ul style="list-style-type: none"> <li>• Six native FC interfaces by configuring either ports xe-0/0/0 through xe-0/0/5 as fc-0/0/0 through fc-0/0/5, or ports xe-0/0/42 through xe-0/0/47 as fc-0/0/42 through fc-0/0/47.</li> <li>• Twelve native FC interfaces by configuring ports xe-0/0/0 through xe-0/0/5 as fc-0/0/0 through fc-0/0/5 and ports xe-0/0/42 through xe-0/0/47 as fc-0/0/42 through fc-0/0/47.</li> <li>• No native FC interfaces by leaving ports xe-0/0/0 through xe-0/0/5 and ports xe-0/0/42 through xe-0/0/47 in their default state as Ethernet interfaces.</li> </ul>
<b>Options</b>	<p><b><i>port-range-low</i></b>—Lowest-numbered port in the block of native FC interfaces, either 0 or 42.</p> <p><b><i>port-range-high</i></b>—Highest-numbered port in the block of native FC interfaces. The value is 5 if the <b><i>port-range-low</i></b> value is 0. The value is 47 if the <b><i>port-range-low</i></b> value is 42.</p>
	<div>  <p><b>NOTE:</b> Only a complete block of ports, xe-0/0/0 through xe-0/0/5, xe-0/0/42 through xe0/0/47, or both, can be configured as FC ports.</p> </div>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fibre-channel interfaces on page 4751</a></li> <li>• <a href="#">Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495</a></li> <li>• <a href="#">Configuring a Physical Fibre Channel Interface on page 4578</a></li> <li>• <a href="#">Understanding Interfaces on an FCoE-FC Gateway on page 4420</a></li> </ul>



## priority (FIP)

---

<b>Syntax</b>	<code>priority <i>priority</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">fc-fabrics</a> <i>fc-fabric-name</i> <a href="#">protocols</a> <a href="#">fip</a> ], [edit <a href="#">fc-fabrics</a> <i>fc-fabric-name</i> <a href="#">protocols</a> <a href="#">fip</a> <a href="#">interface</a> <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Sets the global or interface-specific priority value associated with the switch FCF-MAC. CNAs use the priority value to determine the switch with which they will perform FIP FLOGI. The lower the value, the higher the priority. The switch advertises this value to the server ENodes on the FCoE network. A priority value set at the interface level overrides the global setting.
<b>Options</b>	<b><i>priority</i></b> —Value that determines the FCF an ENode selects to perform FIP FLOGI. The lower the priority number, the higher the priority of the FCF. <b>Range:</b> 0 through 255 <b>Default:</b> 128
<b>Required Privilege Level</b>	storage—To view this statement in the configuration. storage-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show fibre-channel fip on page 4724</a></li><li>• <a href="#">show fibre-channel fip interface on page 4739</a></li><li>• <a href="#">Overview of FIP on page 4384</a></li><li>• <a href="#">Configuring FIP on an FCoE-FC Gateway on page 4589</a></li></ul>



## priority-flow-control


---

<b>Syntax</b>	<code>priority-flow-control {     no-auto-negotiation; }</code>
<b>Hierarchy Level</b>	[edit <a href="#">protocols dcbx interface</a> (all   <i>interface-name</i> )]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series. Statement introduced in Junos OS Release 11.3 for EX Series switches.
<b>Description</b>	Disable autonegotiation of priority-based flow control (PFC) on one or more Ethernet interfaces. Autonegotiation enables PFC on an interface only if the switch and the peer device connected to the switch both support PFC and have the same PFC configuration. Disabling autonegotiation on an interface forces the interface to use the PFC state (enabled or disabled) that is configured on the switch by the configuration and assignment of the congestion notification profile.
<b>Options</b>	<b>no-auto-negotiation</b> —Disable automatic negotiation of PFC.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show dcbx neighbors on page 4694</a></li> <li>• <a href="#">Configuring CoS PFC (Congestion Notification Profiles) on page 5145</a></li> <li>• <a href="#">Configuring Priority-Based Flow Control for an EX Series Switch (CLI Procedure)</a></li> <li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li> <li>• <a href="#">Example: Configuring CoS PFC for FCoE Traffic on page 4509</a></li> <li>• <a href="#">Understanding Data Center Bridging Capability Exchange Protocol for EX Series Switches</a></li> <li>• <a href="#">Understanding Priority-Based Flow Control</a></li> <li>• <a href="#">Understanding DCB Features and Requirements on page 4389</a></li> </ul>



## protocol (Applications)

---

<b>Syntax</b>	<code>protocol (tcp   udp);</code>
<b>Hierarchy Level</b>	[edit applications <a href="#">application</a> <i>application-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Networking protocol type, which combines with <b>destination-port</b> to identify an application type.
<div> <b>NOTE:</b> To create an application for iSCSI, use the protocol <code>tcp</code> with the destination port number 3260.</div>	
<b>Options</b>	<code>tcp</code> —Transmission Control Protocol  <code>udp</code> —User Datagram Protocol
<b>Required Privilege Level</b>	<code>interface</code> —To view this statement in the configuration. <code>interface-control</code> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Defining an Application for DCBX Application Protocol TLV Exchange on page 4604</a></li><li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li><li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li></ul>



## protocols (FIP)

```
Syntax protocols {
    fip {
        fcoe-trusted;
        fc-map fc-map-value;
        fka-adv-period milliseconds;
        interface {
            interface-name {
                fka-adv-period milliseconds;
                priority priority;
            }
        }
        max-sessions-per-enode max-sessions-per-enode;
        priority priority;
        traceoptions {
            file filename <replace> <size size> <files number> <no-stamp>;
            <world-readable | no-world-readable>;
            flag flag <flag-modifier> <disable>;
        }
    }
}
```

**Hierarchy Level** [edit [fc-fabrics](#) *fc-fabric-name*]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure global or interface-specific FC protocol options. Individual interface settings override global settings.

**Options** The statements are explained separately.

**Required Privilege Level** storage—To view this statement in the configuration.  
storage-control—To add this statement to the configuration.

**Related Documentation**

- [show fibre-channel fip on page 4724](#)
- [Configuring FIP on an FCoE-FC Gateway on page 4589](#)
- [Overview of FIP on page 4384](#)



## proxy (Fibre Channel)

---

Syntax	<pre>proxy {   auto-load-rebalance   load-balance-algorithm (simple   enode-based   flog-based);   no-fabric-wwn-verify;   traceoptions {     file <i>filename</i> &lt;replace&gt; &lt;size <i>size</i>&gt; &lt;files <i>number</i>&gt; &lt;no-stamp&gt;     &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i> &lt;<i>flag-modifier</i>&gt; &lt;disable&gt;;   } }</pre>
Hierarchy Level	[edit <a href="#">fc-fabrics</a> <i>fabric-name</i> ]
Description	Configure proxy fabric operations.
Options	The statement is explained separately.
Required Privilege Level	storage—To view this statement in the configuration. storage-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Understanding FCoE-FC Gateway Functions on page 4403</a></li></ul>

## recommendation-tlv

---

Syntax	<pre>recommendation-tlv {   no-auto-negotiation; }</pre>
Hierarchy Level	[edit <a href="#">protocols dcbx interface</a> <i>interface-name</i> <a href="#">enhanced-transmission-selection</a> ]
Release Information	Statement introduced in Junos OS Release 12.2 for the QFX Series.
Description	Disable or enable DCBX to send the ETS Recommendation TLV (also known as the Information TLV) on egress. This feature is valid only if the interface DCBX mode is IEEE DCBX. If the interface DCBX mode is DCBX version 1.01, this statement has no effect. (DCBX version 1.01 does not advertise separate TLVs for individual attributes.)
Default	DCBX-enabled interfaces send the ETS recommendation TLV unless it is disabled.
Options	<b>no-auto-negotiation</b> —Disable sending of the ETS recommendation TLV.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">show dcbx neighbors on page 4694</a></li><li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li></ul>



## speed (Fibre Channel Interfaces)

<b>Syntax</b>	speed (auto-negotiation   2g   4g   8g);
<b>Hierarchy Level</b>	[edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">fibrechannel-options</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Configure FC interface speed.
<b>Options</b>	<p><b>auto-negotiation</b>—Automatically negotiate interface speed to match the speed of the attached link (2 Gbps, 4 Gbps, 8 Gbps).</p> <p><b>2g</b>—2 Gbps link speed</p> <p><b>4g</b>—4 Gbps link speed</p> <p><b>8g</b>—8 Gbps link speed</p> <p><b>Default:</b> auto-negotiation</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fibre-channel interfaces on page 4751</a></li> <li>• <a href="#">Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495</a></li> <li>• <a href="#">Configuring a Fibre Channel Interface on page 4579</a></li> <li>• <a href="#">Configuring a Physical Fibre Channel Interface on page 4578</a></li> <li>• <a href="#">Understanding Interfaces on an FCoE-FC Gateway on page 4420</a></li> </ul>



## traceoptions (FC-2 Fibre Channel)

---

**Syntax**    `traceoptions {  
              file filename <replace> <size size> <files number> <no-stamp>;  
              <world-readable | no-world-readable>;  
              flag flag <flag-modifier>;  
          }`

**Hierarchy Level**    [edit `fc-fabrics fabric-name fc2`]

**Release Information**    Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Set FC-2 protocol tracing options.



.....  
**NOTE:** The `traceoptions` statement is not supported on the QFabric system.  
.....

**Default**    Traceoptions is disabled.

**Options**    **file *name***—Name of the file to receive the tracing operation output. Enclose the name in quotation marks. Traceoption output files are located in the `/var/log/` directory.

**files *number***—(Optional) Maximum number of trace files. When a trace file named ***trace-file*** reaches its maximum size, it is renamed ***trace-file.0***. The traceoption output continues in a second trace file named ***trace-file.1***. When ***trace-file.1*** reaches its maximum size, output continues in a third file named ***trace-file.2***, and so on. When the maximum number of trace files is reached, the oldest trace file is overwritten.

If you specify a maximum number of files, you must also specify a maximum file size with the **size** option.

**Range:** 2 through 1000 files

**Default:** 1 trace file

**flag**—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements:

- **all**—Trace all operations.
- **error**—Trace all error events
- **normal**—Trace all normal events.

**Default:** If you do not specify the **normal** option, only unusual or abnormal operations are traced.

- **parse**—Trace configuration parsing.
- **rx-frame**—(Optional) Trace received frames.
- **rx-frame-header**—(Optional) Trace received frame headers.



- **tx-frame**—(Optional) Trace transmitted frames.
- **tx-frame-header**—(Optional) Trace transmitted frame headers.

**no-stamp**—(Optional) Do not place timestamp information at the beginning of each line in the trace file.

**Default:** If you omit this option, timestamp information is placed at the beginning of each line of the tracing output.

**no-world-readable**—(Optional) Prevent any user from reading the log file.

**replace**—(Optional) Replace an existing trace file if there is one.

**Default:** If you do not include this option, tracing output is appended to an existing trace file.

**size *size***—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named ***trace-file*** reaches its maximum size, it is renamed ***trace-file.0***. Incoming tracefile data is logged in the now empty ***trace-file***. When ***trace-file*** again reaches its maximum size, ***trace-file.0*** is renamed ***trace-file.1*** and ***trace-file*** is renamed ***trace-file.0***. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

If you specify a maximum file size, you must also specify a maximum number of trace files with the **files** option.

**Syntax:** ***xk*** to specify KB, ***xm*** to specify MB, or ***xg*** to specify GB

**Range:** 10 KB through the maximum file size of 4 GB (the maximum is lower if 4 GB is not supported on your system)

**Default:** 1 MB

**world-readable**—(Optional) Allow any user to read the log file.

<b>Required Privilege</b>	storage—To view this statement in the configuration.
<b>Level</b>	storage-control—To add this statement to the configuration.



## traceoptions (Fibre Channel)

---

Syntax	<pre>traceoptions {     file <i>filename</i> &lt;replace&gt; &lt;size <i>size</i>&gt; &lt;files <i>number</i>&gt; &lt;no-stamp&gt;     &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i> &lt;flag-modifier&gt;; }</pre>
Hierarchy Level	[edit <a href="#">fc-options</a> ]
Release Information	Statement introduced in Junos OS Release 11.1 for the QFX Series.
Description	Set FC protocol tracing options.



**NOTE:** The **traceoptions** statement is not supported on the QFabric system.

**Default** Traceoptions is disabled.

**Options** **file *name***—Name of the file to receive the tracing operation output. Enclose the name in quotation marks. Traceoption output files are located in the **/var/log/** directory.

**files *number***—(Optional) Maximum number of trace files. When a trace file named **trace-file** reaches its maximum size, it is renamed **trace-file.0**. The traceoption output continues in a second trace file named **trace-file.1**. When **trace-file.1** reaches its maximum size, output continues in a third file named **trace-file.2**, and so on. When the maximum number of trace files is reached, the oldest trace file is overwritten.

If you specify a maximum number of files, you must also specify a maximum file size with the **size** option.

**Range:** 2 through 1000 files

**Default:** 1 trace file

**flag**—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements:

- **all**—Trace all operations.
- **fabric**—Trace virtual fabric events.
- **fc2**—Trace the FC2 (network layer protocols) events.
- **fip**—Trace the Fibre Channel over Ethernet (FCoE) Initialization Protocol events.
- **flogi**—Trace the fabric login server events.
- **forwarding-database**—Trace the forwarding database and next-hop events.
- **interface**—Trace the interface events.



- **krt**—Trace the communication over the routing socket.
- **lib**—Trace library calls.
- **lif**—Trace Fibre Channel logical interface (fc-lif) events.
- **vswitch**—Trace virtual switch events.

The following are the global tracing options:

- **all**—All trace operations.
- **config-internal**—Trace configuration internals.
- **general**—Trace general events.
- **normal**—All normal events.

**Default:** If you do not specify this option, only unusual or abnormal operations are traced.

- **parse**—Trace configuration parsing.
- **state**—Trace state transitions.
- **task**—Trace protocol task processing.
- **timer**—Trace protocol task timer processing.

**no-stamp**—(Optional) Do not place timestamp information at the beginning of each line in the trace file.

**Default:** If you omit this option, timestamp information is placed at the beginning of each line of the tracing output.

**no-world-readable**—(Optional) Prevent any user from reading the log file.

**replace**—(Optional) Replace an existing trace file if there is one.

**Default:** If you do not include this option, tracing output is appended to an existing trace file.

**size size**—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches its maximum size, it is renamed **trace-file.O**. Incoming tracefile data is logged in the now empty **trace-file**. When **trace-file** again reaches its maximum size, **trace-file.O** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.O**. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

If you specify a maximum file size, you must also specify a maximum number of trace files with the **files** option.

**Syntax:** **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

**Range:** 10 KB through the maximum file size of 4 GB (maximum is lower if 4 GB is not supported on your system)

**Default:** 1 MB



**world-readable**—(Optional) Allow any user to read the log file.

<b>Required Privilege</b>	storage—To view this statement in the configuration.
<b>Level</b>	storage-control—To add this statement to the configuration.



## traceoptions (FIP Protocol Fibre Channel)

**Syntax** `traceoptions {  
     file filename <replace> <size size> <files number> <no-stamp>  
     <world-readable | no-world-readable>;  
     flag flag <flag-modifier>  
 }`

**Hierarchy Level** [edit [fc-fabrics](#) *fabric-name* [protocols](#) [fip](#)]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Set proxy FC protocol tracing options.



**NOTE:** The `traceoptions` statement is not supported on the QFabric system.

**Default** Traceoptions is disabled.

**Options** `file name`—Name of the file to receive the tracing operation output. Enclose the name in quotation marks. Traceoption output files are located in the `/var/log/` directory.

`files number` —(Optional) Maximum number of trace files. When a trace file named `trace-file` reaches its maximum size, it is renamed `trace-file.0`. The traceoption output continues in a second trace file named `trace-file.1`. When `trace-file.1` reaches its maximum size, output continues in a third file named `trace-file.2`, and so on. When the maximum number of trace files is reached, the oldest trace file is overwritten.

If you specify a maximum number of files, you must also specify a maximum file size with the `size` option.

**Range:** 2 through 1000 files

**Default:** 1 trace file

`flag`—Tracing operation to perform. To specify more than one tracing operation, include multiple `flag` statements:

- `all`—Trace all operations.
- `error`—Trace all error events
- `normal`—Trace all normal events.

**Default:** If you do not specify this option, only unusual or abnormal operations are traced.

- `packet`—Trace packet decoding operations
- `parse`—Trace configuration parsing.
- `state`—Trace state transitions.



**no-stamp**—(Optional) Do not place timestamp information at the beginning of each line in the trace file.

**Default:** If you omit this option, timestamp information is placed at the beginning of each line of the tracing output.

**no-world-readable**—(Optional) Prevent any user from reading the log file.

**replace**—(Optional) Replace an existing trace file if there is one.

**Default:** If you do not include this option, tracing output is appended to an existing trace file.

**size size**—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches its maximum size, it is renamed **trace-file.0**. Incoming tracefile data is logged in the now empty **trace-file**. When **trace-file** again reaches its maximum size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

If you specify a maximum file size, you must also specify a maximum number of trace files with the **files** option.

**Syntax:** **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

**Range:** 10 KB through the maximum file size of 4 GB (maximum is lower if 4 GB is not supported on your system)

**Default:** 1 MB

**world-readable**—(Optional) Allow any user to read the log file.

<b>Required Privilege Level</b>	<b>storage</b> —To view this statement in the configuration.
	<b>storage-control</b> —To add this statement to the configuration.



## traceoptions (Proxy Fibre Channel)

**Syntax** `traceoptions {  
     file filename <replace> <size size> <files number> <no-stamp>  
     <world-readable | no-world-readable>;  
     flag flag <flag-modifier>  
 }`

**Hierarchy Level** [edit **fc-fabrics** *fabric-name* **proxy**]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Set proxy FC protocol tracing options.



**NOTE:** The **traceoptions** statement is not supported on the QFabric system.

**Default** Traceoptions is disabled.

**Options** **file *name***—Name of the file to receive the tracing operation output. Enclose the name in quotation marks. Traceoption output files are located in the `/var/log/` directory.

**files *number***—(Optional) Maximum number of trace files. When a trace file named **trace-file** reaches its maximum size, it is renamed **trace-file.0**. The traceoption output continues in a second trace file named **trace-file.1**. When **trace-file.1** reaches its maximum size, output continues in a third file named **trace-file.2**, and so on. When the maximum number of trace files is reached, the oldest trace file is overwritten.

If you specify a maximum number of files, you must also specify a maximum file size with the **size** option.

**Range:** 2 through 1000 files

**Default:** 1 trace file

**flag**—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements:

- **all**—Trace all operations.
- **error**—Trace all error events.
- **interface**—Trace the interface events.
- **normal**—Trace all normal events.

**Default:** If you do not specify this option, only unusual or abnormal operations are traced.

- **packet**—Trace packet decoding operations
- **parse**—Trace configuration parsing.



- **state**—Trace state transitions.

**no-stamp**—(Optional) Do not place timestamp information at the beginning of each line in the trace file.

**Default:** If you omit this option, timestamp information is placed at the beginning of each line of the tracing output.

**no-world-readable**—(Optional) Prevent any user from reading the log file.

**replace**—(Optional) Replace an existing trace file if there is one.

**Default:** If you do not include this option, tracing output is appended to an existing trace file.

**size size**—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches its maximum size, it is renamed **trace-file.0**. Incoming tracefile data is logged in the now empty **trace-file**. When **trace-file** again reaches its maximum size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

If you specify a maximum file size, you must also specify a maximum number of trace files with the **files** option.

**Syntax:** **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

**Range:** 10 KB through the maximum file size of 4 GB (maximum is lower if 4 GB is not supported on your system)

**Default:** 1 MB

**world-readable**—(Optional) Allow any user to read the log file.

**Required Privilege  
Level**

storage—To view this statement in the configuration.

storage-control—To add this statement to the configuration.



# Administration

- [Routine Monitoring on page 4665](#)
- [Operational Commands on page 4670](#)

## Routine Monitoring

---

- [Monitoring Fibre Channel Interface Load Balancing on page 4665](#)

### Monitoring Fibre Channel Interface Load Balancing

You can use operational mode commands to monitor load balancing when the switch is in FCoE-FC gateway mode:

1. [Monitoring the Interface Load-Balancing State on page 4665](#)
2. [Monitoring the Fabric Load-Balancing Algorithm on page 4666](#)

#### Monitoring the Interface Load-Balancing State

---

**Purpose** Monitor the number of sessions, whether load balancing is enabled or disabled, and the load-balancing weight for each native Fibre Channel (FC) interface.



**NOTE:** A session is a FLOGI or FDISC login to the FC SAN fabric. Session does not refer to end-to-end storage sessions.

**Action** To monitor the load-balancing state of the native FC interfaces in the CLI, enter the following CLI command:

```
user@switch> show fibre-channel proxy np-port
```

For example:

```
user@switch> show fibre-channel proxy np-port
Fabric: sanfab1, Fabric-id: 10
NP-Port  State      Sessions    LB state  LB weight
fc-0/0/0.0  online        5           ON        4
fc-0/0/1.0  online        5           ON        4
fc-0/0/2.0  online       10           ON        8

Fabric: fc_fab2, Fabric-id: 200
```



```

NP-Port      State      Sessions      LB state      LB weight
fc-0/0/44.0  isolated    0             OFF           0

Fabric: fc_fabric_100, Fabric-id: 100
NP-Port      State      Sessions      LB state      LB weight
fc-0/0/46.0  online     1             ON            8

```

**Meaning** [Table 323 on page 4666](#) summarizes key output fields for the FC interface load-balancing state.

**Table 323: Summary of Key FC Interface Load-Balancing Output Fields**

Field	Values
Fabric	Name of the fabric.
Fabric-id	Fabric ID number.
NP-Port	NP_Port interface connected to the FCoE forwarder (FCF) or the FC switch.
State	FCID state of the NP_Port interface: <ul style="list-style-type: none"> <li>• <b>online</b>—The port is online and connected to the FC switch. FCoE devices can log in to the FC switch using this port.</li> <li>• <b>isolated</b>—The port is isolated and is not part of the load-balancing function. FCoE devices cannot log in to the FC switch using this port.</li> <li>• <b>offline</b>—The port is offline.</li> </ul>
Sessions	Number of active sessions on the NP_Port interface.
LB state	Load-balancing state: <ul style="list-style-type: none"> <li>• <b>On</b>—Load balancing is on</li> <li>• <b>Off</b>—Load balancing is off.</li> </ul>
LB weight	Load-balancing weight, which reflects the port speed: <ul style="list-style-type: none"> <li>• <b>2</b>—Port speed is 2 Gbps.</li> <li>• <b>4</b>—Port speed is 4 Gbps.</li> <li>• <b>8</b>—Port speed is 8 Gbps.</li> </ul>

The gateway determines the least-loaded interface using the following weighted round-robin (WRR) algorithm:

$$(\text{number-of-sessions} * \text{max-weight}) / \text{weight}$$

where *max-weight* is an internal constant. If the load on the FC interfaces is equal, the session is assigned to the interface with the highest link speed (the greatest weight).

### Monitoring the Fabric Load-Balancing Algorithm

**Purpose** Monitor the type of load-balancing algorithm (simple, ENode-based, or FLOGI-based) used on the native FC interfaces, whether or not automated load rebalancing is enabled, and the load rebalancing state of the fabric.



**Action** To monitor the load-balancing algorithm used on the native FC interfaces and the load rebalancing state in the CLI, enter the following CLI command:

```
user@switch> show fibre-channel proxy fabric-state
```

For example:

```
user@switch> show fibre-channel proxy fabric-state
Fabric: sanfab1, Fabric-id: 10
Proxy load balance algorithm: Simple, Fabric WVN verification: Yes
Auto load rebalance enabled : No
Last rebalance start-time   : Never
Last rebalance end-time     : Never
Last rebalance trigger      : Link-up
Last rebalance trigger-time  : Mon Sep 10 21:42:30 2012 usec: 814602
Last rebalance trigger-result: Not-configured

Fabric: fc_fab2, Fabric-id: 200
Proxy load balance algorithm: ENode based, Fabric WVN verification: Yes
Auto load rebalance enabled : No
Last rebalance start-time   : Never
Last rebalance end-time     : Never
Last rebalance trigger      : Link-up
Last rebalance trigger-time  : Mon Sep 17 17:23:35 2012 usec: 619684
Last rebalance trigger-result: Not-configured

Fabric: fc_fabric_100, Fabric-id: 100
Proxy load balance algorithm: FLOGI based, Fabric WVN verification: No
Auto load rebalance enabled : Yes
Last rebalance start-time   : Never
Last rebalance end-time     : Never
Last rebalance trigger      : Config-CLI
Last rebalance trigger-time  : Fri Nov 2 08:56:16 2012 usec: 004487
Last rebalance trigger-result: Not-required
```

**Meaning** You can configure each local FC fabric on an FCoE-FC gateway to use one of three types of load-balancing algorithms, *simple*, *ENode-based*, or *FLOGI-based*. All of the native FC interfaces (NP\_Ports) in a particular gateway FC fabric use the same load-balancing algorithm (the load-balancing algorithm is applied on a per-fabric basis).

[Table 324 on page 4667](#) summarizes key output fields for the FC interface load-balancing algorithm and state.

**Table 324: show fibre-channel proxy fabric-state Output Fields**

Field Name	Field Description
<b>Fabric</b>	Name of the fabric.
<b>Fabric-id</b>	Fabric ID number.



**Table 324: show fibre-channel proxy fabric-state Output Fields (continued)**

Field Name	Field Description
<b>Proxy load balance algorithm</b>	<p>Load-balancing algorithm used on the FCoE-FC gateway FC fabric:</p> <ul style="list-style-type: none"> <li>Simple—Load balancing is based on the weighted utilization (load) of the NP_Ports connected to an FC fabric. Each new FLOGI or FDISC is assigned to the least-loaded link.</li> </ul> <p>On a link load rebalance, only the sessions that need to be moved to another link are logged out. When those sessions log in again, they are placed on active NP_Port interfaces in a balanced manner.</p> <ul style="list-style-type: none"> <li>ENode-based—Load balancing is based on the ENode FLOGI. When an ENode logs in to the fabric, all subsequent FDISC sessions (VN_Port sessions) associated with that ENode are placed on the same link as the ENode FLOGI session, regardless of the link load. New ENode FLOGIs are placed on the least-loaded link.</li> </ul> <p>On a link load rebalance, all sessions are logged out. When the sessions log in again, they are placed on active NP_Port interfaces in a balanced manner.</p> <ul style="list-style-type: none"> <li>FLOGI-based—Load balancing is based on the ENode FLOGI. When an ENode logs in to the fabric, all subsequent FDISC sessions (VN_Port sessions) associated with that ENode are placed on the same link as the ENode FLOGI session, regardless of the link load. New ENode FLOGIs are placed on the least-loaded link.</li> </ul> <p>On a link load rebalance, only the sessions that need to be moved to another link are logged out. When those sessions log in again, they are placed on active NP_Port interfaces in a balanced manner.</p>
<b>Fabric WWN verification</b>	<p>Fabric worldwide name (WWN) verification check state on the FCoE-FC gateway fabric:</p> <ul style="list-style-type: none"> <li>Yes—Fabric WWN verification check is enabled.</li> <li>No—Fabric WWN verification check is disabled.</li> </ul>
<b>Auto load rebalance enabled</b>	<p>Automated link load rebalancing configuration for the FCoE-FC gateway fabric:</p> <ul style="list-style-type: none"> <li>No—Automated load balancing is disabled (default state).</li> <li>Yes—Automated load balancing is enabled.</li> </ul>
<b>Last rebalance start-time</b>	<p>Time that the last link load rebalance began on the FCoE-FC gateway fabric:</p> <ul style="list-style-type: none"> <li>Never—The link load has never been rebalanced.</li> <li>Timestamp value—Time the last link load rebalancing started.</li> </ul>
<b>Last rebalance end-time</b>	<p>Time that the last link load rebalance ended on the FCoE-FC gateway fabric:</p> <ul style="list-style-type: none"> <li>Never—The link load has never been rebalanced.</li> <li>Timestamp value—Time the last link load rebalancing ended.</li> </ul>



**Table 324: show fibre-channel proxy fabric-state Output Fields (continued)**

Field Name	Field Description
<b>Last rebalance trigger</b>	<p>Event that triggered the last link load rebalance on the FCoE-FC gateway fabric:</p> <ul style="list-style-type: none"> <li>• None—The link load has never been rebalanced.</li> <li>• Config-CLI—Configure (enable) automated load balancing.</li> <li>• Request-CLI—Rebalance requested from the CLI using the <b>request fibre-channel proxy load-rebalance fabric <i>fabric-name</i></b> operational command.</li> <li>• Preview-CLI—Rebalancing <i>dry run</i> requested from the CLI using the <b>request fibre-channel proxy load-rebalance dry-run fabric <i>fabric-name</i></b> operational command. Indicates that the switch completed the dry run. A dry run simulates a link load rebalance and displays a list of sessions that might be affected if you request an actual rebalance.</li> <li>• Link-up—New FC link (NP_Port) up on the FCoE-FC gateway fabric, which causes a rebalance to distribute sessions to the new link.</li> <li>• Restore-complete—If the FC process on the switch restarts, the switch attempts to restore the session state that existed before the restart. When automated rebalance is enabled, restore-complete indicates that the sessions have been restored and rebalanced.</li> </ul>
<b>Last rebalance trigger-time</b>	<p>Time that the last link load rebalance was triggered on the FCoE-FC gateway fabric:</p> <ul style="list-style-type: none"> <li>• Never—Link load rebalancing has never been triggered.</li> <li>• Timestamp value—Time the last link load rebalancing was triggered.</li> </ul>
<b>Last rebalance trigger-result</b>	<p>Result of the last trigger event on the FCoE-FC gateway fabric:</p> <ul style="list-style-type: none"> <li>• Never—Link load rebalancing has never been triggered.</li> <li>• Not-configured—Automated rebalancing is not configured on the FCoE-FC gateway fabric.</li> <li>• Not-required—Last rebalance trigger did not require rebalancing the link load (the link load was already balanced across the active NP_Port links).</li> <li>• In-progress—Link load rebalancing is in progress and has not finished yet.</li> <li>• Restore-in-progress—The switch is recovering from an FC process restart and is in the process of restoring the sessions to the active NP_Port links.</li> <li>• Success—Link load rebalancing was successful.</li> <li>• Logged-out-all—All sessions have been logged out.</li> <li>• Preview-complete—The switch has finished simulating a dry run rebalancing request from the CLI (<b>request fibre-channel proxy load-rebalance dry-run fabric <i>fabric-name</i></b> operational command) and reported the sessions that might be affected if you request an actual link load rebalance.</li> <li>• Fabric-deletion-in-progress—FCoE-FC gateway fabric is in the process of being deleted.</li> </ul> <p><b>NOTE:</b> A trigger event does not necessarily result in a rebalance action. Link load rebalancing only occurs if the NP_Port interface session load is not balanced at the time of the trigger event.</p>

**Related Documentation** • [show fibre-channel proxy fabric-state on page 4757](#)



- [show fibre-channel proxy np-port on page 4764](#)
- [Configuring a Fibre Channel Interface on page 4579](#)
- [Defining the Proxy Load-Balancing Algorithm on page 4586](#)
- [Example: Configuring Automated Fibre Channel Interface Load Rebalancing on page 4572](#)
- [Understanding Load Balancing in an FCoE-FC Gateway Proxy Fabric on page 4431](#)
- [Understanding FCoE-FC Gateway Functions on page 4403](#)

## Operational Commands

---



---

## clear fibre-channel fc2 statistics

---

<b>Syntax</b>	<code>clear fibre-channel fc2 statistics</code> <code>&lt;fabric <i>fabric-name</i>&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Clear FC-2 (network layer) Fibre Channel statistics globally or on a specified Fibre Channel fabric.
<b>Options</b>	<code>fabric <i>fabric-name</i></code> —(Optional) Clear FC-2 statistics only on the specified fabric.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show fibre-channel fc2 statistics on page 4722</a></li><li>• <a href="#">show fibre-channel fc2 sessions on page 4720</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear fibre-channel fc2 statistics on page 4671</a>

### Sample Output

`clear fibre-channel fc2 statistics`    `user@switch> clear fibre-channel fc2 statistics`



## clear fibre-channel fip enode

---

<b>Syntax</b>	<code>clear fibre-channel fip enode <i>enode-mac</i></code>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Clear Fibre Channel over Ethernet (FCoE) node (ENode) information for a specified ENode. This operation deletes the ENode state from the switch database and from the FIP snooping firewall filters, which causes the ENode to lose the connection to the Fibre Channel (FC) fabric and to log in to the fabric again. If you clear an ENode, all VN_Ports associated with that ENode are also cleared and lose their connection to the FC fabric and must log in to the fabric again.
<b>Options</b>	<i>enode-mac</i> —MAC address of the ENode.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show fibre-channel fip enode on page 4729</a></li><li>• <a href="#">clear fibre-channel fip statistics on page 4673</a></li><li>• <a href="#">clear fibre-channel fip vn-port on page 4674</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear fibre-channel fip enode on page 4672</a>
<b>Sample Output</b>	
<code>clear fibre-channel fip enode</code>	<pre>user@switch&gt; clear fibre-channel fip enode 00:10:94:00:00:02</pre>



---

## clear fibre-channel fip statistics

---

<b>Syntax</b>	<code>clear fibre-channel fip statistics</code> <code>&lt;fabric <i>fabric-name</i>&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Clear Fibre Channel over Ethernet (FCoE) initialization protocol (FIP) statistics.
<b>Options</b>	<code>fabric <i>fabric-name</i></code> —(Optional) Clear FIP statistics only on the specified fabric.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show fibre-channel fip statistics on page 4742</a></li><li>• <a href="#">show fibre-channel fip on page 4724</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear fibre-channel fip statistics on page 4673</a>

### Sample Output

`clear fibre-channel fip statistics`     `user@switch> clear fibre-channel fip statistics`



## clear fibre-channel fip vn-port

---

<b>Syntax</b>	<code>clear fibre-channel fip vn-port <i>vn-port</i>--<i>mac</i></code>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Clear virtual N_Port (VN_Port) information for a specified VN_Port. This operation deletes the VN_Port state from the switch database and from the FIP snooping firewall filters, which causes the VN_Port to lose its connection to the Fibre Channel fabric and to log in to the fabric again. When you clear a VN_Port, other VN_Ports associated with the same Fibre Channel over Ethernet (FCoE) Node (ENode) are not affected and are not cleared.
<b>Options</b>	<i>vn-port-mac</i> —MAC address of the VN_Port.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show fibre-channel fip enode on page 4729</a></li><li>• <a href="#">clear fibre-channel fip enode on page 4672</a></li><li>• <a href="#">clear fibre-channel fip statistics on page 4673</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear fibre-channel fip vn-port on page 4674</a>
<b>Sample Output</b>	
<code>clear fibre-channel fip vn-port</code>	<pre>user@switch&gt; clear fibre-channel fip vn-port 00:10:94:00:00:08</pre>



## clear fibre-channel flogi statistics

---

<b>Syntax</b>	<code>clear fibre-channel flogi statistics</code> <code>&lt;fabric <i>fabric-name</i>&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Clear fabric login (FLOGI) statistics globally or on a specified Fibre Channel fabric.
<b>Options</b>	<code>fabric <i>fabric-name</i></code> —(Optional) Clear FLOGI statistics only on the specified fabric.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fibre-channel flogi statistics on page 4749</a></li> <li>• <a href="#">show fibre-channel flogi fport on page 4746</a></li> <li>• <a href="#">show fibre-channel flogi nport on page 4747</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">clear fibre-channel flogi statistics on page 4675</a>

### Sample Output

```
clear fibre-channel flogi statistics      user@switch> clear fibre-channel flogi statistics
```



## clear fibre-channel proxy statistics

---

<b>Syntax</b>	<b>clear fibre-channel proxy statistics</b> <b>&lt;fabric <i>fabric-name</i>&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Clear Fibre Channel gateway statistics globally or on a specified Fibre Channel fabric.
<b>Options</b>	<b>fabric <i>fabric-name</i></b> —(Optional) Clear proxy statistics only on the specified fabric.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show fibre-channel proxy statistics on page 4767</a></li><li>• <a href="#">show fibre-channel proxy login-table on page 4760</a></li><li>• <a href="#">show fibre-channel proxy np-port on page 4764</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear fibre-channel proxy statistics on page 4676</a>

### Sample Output

<b>clear fibre-channel proxy statistics</b>	<b>user@switch&gt; clear fibre-channel proxy statistics</b>
---	---



## clear fip snooping enode

<b>Syntax</b>	<code>clear fip snooping enode <i>enode-mac</i></code> <code>&lt;vlan <i>vlan-name</i>&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 10.4 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Clear FIP snooping information for the specified FCoE Node (ENode) or (optionally) only on a specified VLAN. This operation deletes the ENode state from the switch database and from the FIP snooping firewall filters, which causes the ENode to lose its connection to the FCoE forwarder (FCF) and to log in to the FCF again.
<b>Options</b>	<i>enode-mac</i> —MAC address of the ENode.  <i>vlan vlan-name</i> —(Optional) Name of the VLAN.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fip snooping enode on page 4775</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">clear fip snooping enode enode-mac on page 4677</a>
<b>Sample Output</b>	
<code>clear fip snooping enode enode-mac</code>	<code>user@switch&gt; clear fip snooping enode 00:10:94:00:00:02</code>



## clear fip snooping statistics

---

<b>Syntax</b>	<code>clear fip snooping statistics</code> <code>&lt;vlan <i>vlan-name</i>&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 10.4 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Clear FIP snooping statistics globally or on a specified VLAN.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show fip snooping statistics on page 4783</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear fip snooping statistics on page 4678</a>

### Sample Output

<code>clear fip snooping statistics</code>	<code>user@switch&gt; clear fip snooping statistics</code>
--	--



## clear fip snooping vlan

---

<b>Syntax</b>	<code>clear fip snooping vlan <i>vlan-name</i></code>
<b>Release Information</b>	Command introduced in Junos OS Release 10.4 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Clear FIP snooping information for the specified VLAN. This operation deletes all ENode and FCF information for the VLAN from the switch database and causes the ENodes to lose their connections to the FCFs. After clearing a VLAN, the switch relearns all of the FCFs and ENodes on the VLAN, and the ENodes must log in to the FCF again.
<b>Options</b>	<i>vlan-name</i> —Name of the VLAN.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fip snooping vlan on page 4786</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">clear fip snooping vlan vlan-name on page 4679</a>

### Sample Output

`clear fip snooping vlan`  
`clear fip snooping vlan fcoevlan1`  
`clear fip snooping vlan`  
`clear fip snooping vlan fcoevlan1`



## clear fip vlan-discovery statistics

---

<b>Syntax</b>	clear fip vlan-discovery statistics
<b>Release Information</b>	Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Clear FIP VLAN discovery statistics.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show fip vlan-discovery on page 4790</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear fip vlan-discovery statistics on page 4680</a>

### Sample Output

`clear fip vlan-discovery statistics`     user@switch> clear fip vlan-discovery statistics



## request fibre-channel proxy load-rebalance

<b>Syntax</b>	request fibre-channel proxy load-rebalance <dry-run> fabric < <i>fabric-name</i> > <brief   detail>
<b>Release Information</b>	Command introduced in Junos OS Release 12.3 for the QFX Series.
<b>Description</b>	<p>Rebalance the link load on one or more FCoE-FC gateway proxy fabrics (local Fibre Channel fabrics on the gateway) on demand. Load rebalancing is a disruptive action that forces some or all sessions (depending on the configured load-balancing algorithm) to log out and then log in again. When sessions log in again, they are placed on NP_Port interfaces so that the link loads are balanced.</p> <p>Link load rebalancing occurs 10 seconds after you run the rebalancing command, unless another rebalancing trigger occurs before the 10 seconds elapse. If another rebalancing event occurs before the 10-second timer elapses, the timer is extended. Rebalancing occurs a maximum of 30 seconds after you run the rebalancing command, regardless of whether more rebalancing events occur.</p> <p>You can also perform a <i>dry run</i> to see a list of sessions that might be affected (logged out) if you request a load rebalance. A dry run does not rebalance the link loads; it only lists the sessions that might be affected if you rebalance.</p>
<b>Options</b>	<p><b>dry-run</b>—(Optional) Simulates performing link load rebalancing and displays a list of sessions that might be affected if you rebalance the link loads.</p> <p><b>fabric <i>fabric-name</i></b>—Name of the fabric on which you want to rebalance the link loads. If you do not specify a fabric name with the fabric keyword, all fabrics on the FCoE-FC gateway rebalance their link loads.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p>
<b>Additional Information</b>	Requesting link load rebalancing is a one-time, on-demand operation. You must explicitly request load rebalancing every time you want to rebalance the link loads. Alternatively, you can configure automated load rebalancing if you want the NP_Port links to be rebalanced automatically whenever a load-rebalancing trigger occurs.
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Monitoring Fibre Channel Interface Load Balancing on page 4665</a></li> <li>• <a href="#">Simulating On-Demand Fibre Channel Link Load Rebalancing (Dry Run Test) on page 4588</a></li> <li>• <a href="#">Defining the Proxy Load-Balancing Algorithm on page 4586</a></li> <li>• <a href="#">Example: Configuring Automated Fibre Channel Interface Load Rebalancing on page 4572</a></li> <li>• <a href="#">Understanding Load Balancing in an FCoE-FC Gateway Proxy Fabric on page 4431</a></li> </ul>



**List of Sample Output** [request fibre-channel proxy load-rebalance dry-run fabric fc\\_fabric\\_100 on page 4682](#)

**Output Fields** [Table 325 on page 4682](#) lists the output fields for the **request fibre-channel proxy load-rebalance dry-run** command. Output fields are listed in the approximate order in which they appear.

**Table 325: request fibre-channel proxy load-rebalance dry-run Output Fields**

Field Name	Field Description
<b>Fabric</b>	Name of the fabric.
<b>Fabric-id</b>	Fabric ID number.
<b>F-Port</b>	FCoE VLAN interface (VF_Port interface to the FCoE network).
<b>FCID</b>	VN_Port Fibre Channel identifier provided by the Fibre Channel over Ethernet Forwarder (FCoE forwarder) or the Fibre Channel switch.
<b>Port-WWN</b>	Unique worldwide name (WWN) of the VN_Port.
<b>NP-Port</b>	Name of the native Fibre Channel interface.

## Sample Output

**request fibre-channel  
proxy load-rebalance  
dry-run fabric  
fc\_fabric\_100**

```
user@host> request fibre-channel proxy load-rebalance dry-run fabric fc_fabric_100
Fabric: fc_fabric_100, Fabric-id: 100
F-Port      FCID      Port-WWN      NP-Port
vlan.100    0x8a013a  02:01:00:64:00:00:00:2a  fc-0/0/1.0
vlan.100    0x8a013c  02:01:00:64:00:00:00:2b  fc-0/0/1.0
vlan.100    0x8a0146  02:01:00:64:00:00:00:2e  fc-0/0/1.0
vlan.100    0x8a014c  02:01:00:64:00:00:00:2f  fc-0/0/1.0
```




## restart

<b>Syntax</b>	<pre>restart &lt;adaptive-services   ancpd-service   application-identification   audit-process     auto-configuration   captive-portal-content-delivery   ce-l2tp-service   chassis-control     class-of-service   clksyncd-service   database-replication   datapath-trace-service     dhcp-service   diameter-service   disk-monitoring   dynamic-flow-capture     ecc-error-logging   ethernet-connectivity-fault-management     ethernet-link-fault-management   event-processing   firewall     general-authentication-service   gracefully   iccp-service   idp-policy   immediately     interface-control   ipsec-key-management   kernel-replication   l2-learning   l2cpd-service     l2tp-service   l2tp-universal-edge   lacp   license-service   link-management     local-policy-decision-function   mac-validation   mib-process   mobile-ip   mountd-service     mpls-traceroute   mspd   multicast-snooping   named-service   nfsd-service     packet-triggered-subscribers   peer-selection-service   pgcp-service   pgm     pic-services-logging   pki-service   ppp   ppp-service   pppoe     protected-system-domain-service   redundancy-interface-process   remote-operations     root-system-domain-service   routing &lt;logical-system <i>logical-system-name</i>&gt;   sampling     sbc-configuration-process   sdk-service   service-deployment   services   services pgcp   gateway <i>gateway-name</i>   snmp   soft   static-subscribers   statistics-service     subscriber-management   subscriber-management-helper   tunnel-oamd   usb-control     vrrp   web-management&gt; &lt;gracefully   immediately   soft&gt;</pre>
<b>Syntax (ACX Series Routers)</b>	<pre>restart &lt;adaptive-services   audit-process   auto-configuration   autoinstallation   chassis-control     class-of-service   clksyncd-service   database-replication   dhcp-service   diameter-service     disk-monitoring   dynamic-flow-capture   ethernet-connectivity-fault-management     ethernet-link-fault-management   event-processing   firewall     general-authentication-service   gracefully   immediately   interface-control     ipsec-key-management   l2-learning   lacp   link-management   mib-process   mobile-ip     mountd-service   mpls-traceroute   mspd   named-service   nfsd-service   pgm   pki-service     ppp   pppoe   redundancy-interface-process   remote-operations   routing   sampling     sdk-service   secure-neighbor-discovery   service-deployment   services   snmp   soft     statistics-service   subscriber-management   subscriber-management-helper   tunnel-oamd     vrrp&gt;</pre>
<b>Syntax (EX Series Switches)</b>	<pre>restart &lt;autoinstallation   chassis-control   class-of-service   database-replication   dhcp     dhcp-service   diameter-service   dot1x-protocol   ethernet-link-fault-management     ethernet-switching   event-processing   firewall   general-authentication-service     interface-control   kernel-replication   l2-learning   lacp   license-service   link-management     lldpd-service   mib-process   mountd-service   multicast-snooping   pgm     redundancy-interface-process   remote-operations   routing   secure-neighbor-discovery     service-deployment   sflow-service   snmp   vrrp   web-management&gt;</pre>
<b>Syntax (Routing Matrix)</b>	<pre>restart &lt;adaptive-services   audit-process   chassis-control   class-of-service   disk-monitoring     dynamic-flow-capture   ecc-error-logging   event-processing   firewall   interface-control     ipsec-key-management   kernel-replication   l2-learning   l2tp-service   lacp     link-management   mib-process   pgm   pic-services-logging   ppp   pppoe     redundancy-interface-process   remote-operations   routing &lt;logical-system   <i>logical-system-name</i>&gt;   sampling   service-deployment   snmp&gt; &lt;all   all-lcc   lcc <i>number</i>&gt;</pre>



	<gracefully   immediately   soft>
<b>Syntax (J Series Routing Platform)</b>	<p>restart</p> <p>&lt;adaptive-services   audit-process   chassis-control   class-of-service   dhcp   dialer-services   dlsr   event-processing   firewall   interface-control   ipsec-key-management   isdn-signaling   l2-learning   l2tp-service   mib-process   network-access-service   pgm   ppp   pppoe   remote-operations   routing &lt;logical-system <i>logical-system-name</i>&gt;   sampling   service-deployment   snmp   usb-control   web-management&gt;</p> <p>&lt;gracefully   immediately   soft&gt;</p>
<b>Syntax (TX Matrix Routers)</b>	<p>restart</p> <p>&lt;adaptive-services   audit-process   chassis-control   class-of-service   dhcp-service   diameter-service   disk-monitoring   dynamic-flow-capture   ecc-error-logging   event-processing   firewall   interface-control   ipsec-key-management   kernel-replication   l2-learning   l2tp-service   lacp   link-management   mib-process   pgm   pic-services-logging   ppp   pppoe   redundancy-interface-process   remote-operations   routing &lt;logical-system <i>logical-system-name</i>&gt;   sampling   service-deployment   snmp   statistics-service&gt;</p> <p>&lt;all-chassis   all-lcc   lcc <i>number</i>   scc&gt;</p> <p>&lt;gracefully   immediately   soft&gt;</p>
<b>Syntax (TX Matrix Plus Routers)</b>	<p>restart</p> <p>&lt;adaptive-services   audit-process   chassis-control   class-of-service   dhcp-service   diameter-service   disk-monitoring   dynamic-flow-capture   ecc-error-logging   event-processing   firewall   interface-control   ipsec-key-management   kernel-replication   l2-learning   l2tp-service   lacp   link-management   mib-process   pgm   pic-services-logging   ppp   pppoe   redundancy-interface-process   remote-operations   routing &lt;logical-system <i>logical-system-name</i>&gt;   sampling   service-deployment   snmp   statistics-service&gt;</p> <p>&lt;all-chassis   all-lcc   all-sfc   lcc <i>number</i>   sfc <i>number</i>&gt;</p> <p>&lt;gracefully   immediately   soft&gt;</p>
<b>Syntax (MX Series Routers)</b>	<p>restart</p> <p>&lt;adaptive-services   ancpd-service   application-identification   audit-process   auto-configuration   captive-portal-content-delivery   ce-l2tp-service   chassis-control   class-of-service   clksyncd-service   database-replication   datapath-trace-service   dhcp-service   diameter-service   disk-monitoring   dynamic-flow-capture   ecc-error-logging   ethernet-connectivity-fault-management   ethernet-link-fault-management   event-processing   firewall   general-authentication-service   gracefully   iccp-service   idp-policy   immediately   interface-control   ipsec-key-management   kernel-replication   l2-learning   l2cpd-service   l2tp-service   l2tp-universal-edge   lacp   license-service   link-management   local-policy-decision-function   mac-validation   mib-process   mobile-ip   mounstd-service   mpls-traceroute   mspd   multicast-snooping   named-service   nfsd-service   packet-triggered-subscribers   peer-selection-service   pgcp-service   pgm   pic-services-logging   pki-service   ppp   ppp-service   pppoe   protected-system-domain-service   redundancy-interface-process   remote-operations   root-system-domain-service   routing   routing &lt;logical-system <i>logical-system-name</i>&gt;   sampling   sbc-configuration-process   sdk-service   service-deployment   services   services pgcp gateway <i>gateway-name</i>   snmp   soft   static-subscribers   statistics-service   subscriber-management   subscriber-management-helper   tunnel-oamd   usb-control   vrrp   web-management&gt;</p> <p>&lt;all-members&gt;</p> <p>&lt;gracefully   immediately   soft&gt;</p> <p>&lt;local&gt;</p> <p>&lt;member <i>member-id</i>&gt;</p>



<b>Syntax (J Series Routers)</b>	<pre>restart &lt;adaptive-services   audit-process   chassis-control   class-of-service   dhcp   dhcp-service   dialer-services   diameter-service   dlsf   event-processing   firewall   interface-control   ipsec-key-management   isdn-signaling   l2ald   l2-learning   l2tp-service   mib-process   network-access-service   pgm   ppp   pppoe   remote-operations   routing &lt;logical-system logical-system-name&gt;   sampling   service-deployment   snmp   usb-control   web-management&gt; &lt;gracefully   immediately   soft&gt;</pre>
<b>Syntax (QFX Series)</b>	<pre>restart &lt;adaptive-services   audit-process   chassis-control   class-of-service   dialer-services   diameter-service   dlsf   ethernet-connectivity   event-processing   fibre-channel   firewall   general-authentication-service   igmp-host-services   interface-control   ipsec-key-management   isdn-signaling   l2ald   l2-learning   l2tp-service   mib-process   named-service   network-access-service   nstrace-process   pgm   ppp   pppoe   redundancy-interface-process   remote-operations  logical-system-name&gt;   routing   sampling  secure-neighbor-discovery   service-deployment   snmp   usb-control   web-management&gt; &lt;gracefully   immediately   soft&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.  Command introduced in Junos OS Release 9.0 for EX Series switches.  Command introduced in Junos OS Release 11.1 for the QFX Series.  Command introduced in Junos OS Release 12.2 for ACX Series routers.  Options added:</p> <ul style="list-style-type: none"> <li>• <b>dynamic-flow-capture</b> in Junos OS Release 7.4.</li> <li>• <b>dlsf</b> in Junos OS Release 7.5.</li> <li>• <b>event-processing</b> in Junos OS Release 7.5.</li> <li>• <b>ppp</b> in Junos OS Release 7.5.</li> <li>• <b>l2ald</b> in Junos OS Release 8.0.</li> <li>• <b>link-management</b> in Release 8.0.</li> <li>• <b>pgcp-service</b> in Junos OS Release 8.4.</li> <li>• <b>sbc-configuration-process</b> in Junos OS Release 9.5.</li> <li>• <b>services pgcp gateway</b> in Junos OS Release 9.6.</li> <li>• <b>sfc</b> and <b>all-sfc</b> for the TX Matrix Router in Junos OS Release 9.6.</li> </ul>
<b>Description</b>	Restart a Junos OS process.
	
<p><b>CAUTION:</b> Never restart a software process unless instructed to do so by a customer support engineer. A restart might cause the router or switch to drop calls and interrupt transmission, resulting in possible loss of data.</p>	
<b>Options</b>	none—Same as <b>gracefully</b> .



**adaptive-services**—(Optional) Restart the configuration management process that manages the configuration for stateful firewall, Network Address Translation (NAT), intrusion detection services (IDS), and IP Security (IPsec) services on the Adaptive Services PIC.

**all-chassis**—(TX Matrix and TX Matrix Plus routers only) (Optional) Restart the software process on all chassis.

**all-lcc**—(TX Matrix and TX Matrix Plus routers only) (Optional) For a TX Matrix router, restart the software process on all T640 routers connected to the TX Matrix router. For a TX Matrix Plus router, restart the software process on all T1600 routers connected to the TX Matrix Plus router.

**all-members**—(MX Series routers only) (Optional) Restart the software process for all members of the Virtual Chassis configuration.

**all-sfc**—(TX Matrix Plus routers only) (Optional) For a TX Matrix Plus router, restart the software processes for the TX Matrix Plus router (or switch-fabric chassis).

**ancpd-service**—(Optional) Restart the Access Node Control Protocol (ANCP) process, which works with a special Internet Group Management Protocol (IGMP) session to collect outgoing interface mapping events in a scalable manner.

**application-identification**—(Optional) Restart the process that identifies an application using intrusion detection and prevention (IDP) to allow or deny traffic based on applications running on standard or nonstandard ports.

**audit-process**—(Optional) Restart the RADIUS accounting process that gathers statistical data that can be used for general network monitoring, analyzing, and tracking usage patterns, for billing a user based on the amount of time or type of services accessed.

**auto-configuration**—(Optional) Restart the Interface Auto-Configuration process.

**autoinstallation**—(EX Series switches only) (Optional) Restart the autoinstallation process.

**captive-portal-content-delivery**—(Optional) Restart the HTTP redirect service by specifying the location to which a subscriber's initial Web browser session is redirected, enabling initial provisioning and service selection for the subscriber.

**ce-l2tp-service**—(M10, M10i, M7i, and MX Series routers only) (Optional) Restart the Universal Edge Layer 2 Tunneling Protocol (L2TP) process, which establishes L2TP tunnels and Point-to-Point Protocol (PPP) sessions through L2TP tunnels.

**chassis-control**—(Optional) Restart the chassis management process.

**class-of-service**—(Optional) Restart the class-of-service (CoS) process, which controls the router's or switch's CoS configuration.

**clksyncd-service**—(Optional) Restart the external clock synchronization process, which uses synchronous Ethernet (SyncE).



**database-replication**—(EX Series switches and MX Series routers only) (Optional) Restart the database replication process.

**datapath-trace-service**—(Optional) Restart the packet path tracing process.

**dhcp**—(J Series routers and EX Series switches only) (Optional) Restart the software process for a Dynamic Host Configuration Protocol (DHCP) server. A DHCP server allocates network IP addresses and delivers configuration settings to client hosts without user intervention.

**dhcp-service**—(Optional) Restart the Dynamic Host Configuration Protocol process.

**dialer-services**—(J Series routers and EX Series switches only) (Optional) Restart the ISDN dial-out process.

**diameter-service**—(Optional) Restart the diameter process.

**disk-monitoring**—(Optional) Restart disk monitoring, which checks the health of the hard disk drive on the Routing Engine.

**dls**—(J Series routers and QFX Series only) (Optional) Restart the data link switching (DLSw) service.

**dot1x-protocol**—(EX Series switches only) (Optional) Restart the port-based network access control process.

**dynamic-flow-capture**—(Optional) Restart the dynamic flow capture (DFC) process, which controls DFC configurations on Monitoring Services III PICs.

**ecc-error-logging**—(Optional) Restart the error checking and correction (ECC) process, which logs ECC parity errors in memory on the Routing Engine.

**ethernet-connectivity-fault-management**—(Optional) Restart the process that provides IEEE 802.1ag Operation, Administration, and Management (OAM) connectivity fault management (CFM) database information for CFM maintenance association end points (MEPs) in a CFM session.

**ethernet-link-fault-management**—(EX Series switches and MX Series routers only) (Optional) Restart the process that provides the OAM link fault management (LFM) information for Ethernet interfaces.

**ethernet-switching**—(EX Series switches only) (Optional) Restart the Ethernet switching process.

**event-processing**—(Optional) Restart the event process (eventd).

**fibre-channel**—(QFX Series only) (Optional) Restart the Fibre Channel process.

**firewall**—(Optional) Restart the firewall management process, which manages the firewall configuration and enables accepting or rejecting packets that are transiting an interface on a router or switch.



**general-authentication-service**—(EX Series switches and MX Series routers only) (Optional) Restart the general authentication process.

**gracefully**—(Optional) Restart the software process.

**iccp-service**—(Optional) Restart the Inter-Chassis Communication Protocol (ICCP) process.

**idp-policy**—(Optional) Restart the intrusion detection and prevention (IDP) protocol process.

**immediately**—(Optional) Immediately restart the software process.

**interface-control**—(Optional) Restart the interface process, which controls the router's or switch's physical interface devices and logical interfaces.

**ipsec-key-management**—(Optional) Restart the IPsec key management process.

**isdn-signaling**—(J Series routers and QFX Series only) (Optional) Restart the ISDN signaling process, which initiates ISDN connections.

**kernel-replication**—(Optional) Restart the kernel replication process, which replicates the state of the backup Routing Engine when graceful Routing Engine switchover (GRES) is configured.

**l2-learning**—(Optional) Restart the Layer 2 address flooding and learning process.

**l2cpd-service**—(Optional) Restart the Layer 2 Control Protocol process, which enables features such as Layer 2 protocol tunneling and nonstop bridging.

**l2tp-service**—(M10, M10i, M7i, and MX Series routers only) (Optional) Restart the Layer 2 Tunneling Protocol (L2TP) process, which sets up client services for establishing Point-to-Point Protocol (PPP) tunnels across a network and negotiating Multilink PPP if it is implemented.

**l2tp-universal-edge**—(MX Series routers only) (Optional) Restart the L2TP process, which establishes L2TP tunnels and PPP sessions through L2TP tunnels.

**lACP**—(Optional) Restart the Link Aggregation Control Protocol (LACP) process. LACP provides a standardized means for exchanging information between partner systems on a link to allow their link aggregation control instances to reach agreement on the identity of the LAG to which the link belongs, and then to move the link to that LAG, and to enable the transmission and reception processes for the link to function in an orderly manner.

**lcc number**—(TX Matrix and TX Matrix Plus routers only) (Optional) For a TX Matrix router, restart the software process for a specific T640 router that is connected to the TX Matrix router. For a TX Matrix Plus router, restart the software process for a specific T1600 router that is connected to the TX Matrix Plus router. Replace **number** with a value from 0 through 3.

**license-service**—(EX Series switches only) (Optional) Restart the feature license management process.



**link-management**— (TX Matrix and TX Matrix Plus routers and EX Series switches only) (Optional) Restart the Link Management Protocol (LMP) process, which establishes and maintains LMP control channels.

**lldpd-service**— (EX Series switches only) (Optional) Restart the Link Layer Discovery Protocol (LLDP) process.

**local**— (MX Series routers only) (Optional) Restart the software process for the local Virtual Chassis member.

**local-policy-decision-function**— (Optional) Restart the process for the Local Policy Decision Function, which regulates collection of statistics related to applications and application groups and tracking of information about dynamic subscribers and static interfaces.

**mac-validation**— (Optional) Restart the Media Access Control (MAC) validation process, which configures MAC address validation for subscriber interfaces created on demux interfaces in dynamic profiles on MX Series routers.

**member *member-id***— (MX Series routers only) (Optional) Restart the software process for a specific member of the Virtual Chassis configuration. Replace *member-id* with a value of 0 or 1.

**mib-process**— (Optional) Restart the Management Information Base (MIB) version II process, which provides the router's MIB II agent.

**mobile-ip**— (Optional) Restart the Mobile IP process, which configures Junos OS Mobile IP features.

**mountd-service**— (EX Series switches and MX Series routers only) (Optional) Restart the service for NFS mount requests.

**mpls-traceroute**— (Optional) Restart the MPLS Periodic Traceroute process.

**mspd**— (Optional) Restart the Multiservice process.

**multicast-snooping**— (EX Series switches and MX Series routers only) (Optional) Restart the multicast snooping process, which makes Layer 2 devices, such as VLAN switches, aware of Layer 3 information, such as the media access control (MAC) addresses of members of a multicast group.

**named-service**— (Optional) Restart the DNS Server process, which is used by a router or a switch to resolve hostnames into addresses.

**network-access-service**— (J Series routers and QFX Series only) (Optional) Restart the network access process, which provides the router's Challenge Handshake Authentication Protocol (CHAP) authentication service.

**nfsd-service**— (Optional) Restart the Remote NFS Server process, which provides remote file access for applications that need NFS-based transport.



**packet-triggered-subscribers**—(Optional) Restart the packet-triggered subscribers and policy control (PTSP) process, which allows the application of policies to dynamic subscribers that are controlled by a subscriber termination device.

**peer-selection-service**—(Optional) Restart the Peer Selection Service process.

**pgcp-service**—(Optional) Restart the pgcpd service process running on the Routing Engine. This option does not restart pgcpd processes running on mobile station PICs. To restart pgcpd processes running on mobile station PICs, use the **services pgcp gateway** option.

**pgm**—(Optional) Restart the process that implements the Pragmatic General Multicast (PGM) protocol for assisting in the reliable delivery of multicast packets.

**pic-services-logging**—(Optional) Restart the logging process for some PICs. With this process, also known as fsad (the file system access daemon), PICs send special logging information to the Routing Engine for archiving on the hard disk.

**pki-service**—(Optional) Restart the PKI Service process.

**ppp**—(Optional) Restart the Point-to-Point Protocol (PPP) process, which is the encapsulation protocol process for transporting IP traffic across point-to-point links.

**ppp-service**—(Optional) Restart the Universal Edge PPP process, which is the encapsulation protocol process for transporting IP traffic across Universal Edge routers.

**pppoe**—(Optional) Restart the Point-to-Point Protocol over Ethernet (PPPoE) process, which combines PPP that typically runs over broadband connections with the Ethernet link-layer protocol that allows users to connect to a network of hosts over a bridge or access concentrator.

**protected-system-domain-service**—(Optional) Restart the Protected System Domain (PSD) process.

**redundancy-interface-process**—(Optional) Restart the ASP redundancy process.

**remote-operations**—(Optional) Restart the remote operations process, which provides the ping and traceroute MIBs.

**root-system-domain-service**—(Optional) Restart the Root System Domain (RSD) service.

**routing**—(ACX Series routers, QFX Series, EX Series switches, and MX Series routers only) (Optional) Restart the routing protocol process.

**routing <logical-system *logical-system-name*>**—(Optional) Restart the routing protocol process, which controls the routing protocols that run on the router or switch and maintains the routing tables. Optionally, restart the routing protocol process for the specified logical system only.

**sampling**—(Optional) Restart the sampling process, which performs packet sampling based on particular input interfaces and various fields in the packet header.



**sbcc-configuration-process**—(Optional) Restart the session border controller (SBC) process of the border signaling gateway (BSG).

**scc**—(TX Matrix routers only) (Optional) Restart the software process on the TX Matrix router (or switch-card chassis).

**sdk-service**—(Optional) Restart the SDK Service process, which runs on the Routing Engine and is responsible for communications between the SDK application and Junos OS. Although the SDK Service process is present on the router, it is turned off by default.

**secure-neighbor-discovery**—(QFX Series, EX Series switches, and MX Series routers only) (Optional) Restart the secure Neighbor Discovery Protocol (NDP) process, which provides support for protecting NDP messages.

**sfc number**—(TX Matrix Plus routers only) (Optional) Restart the software process on the TX Matrix Plus router (or switch-fabric chassis). Replace **number** with **0**.

**service-deployment**—(Optional) Restart the service deployment process, which enables Junos OS to work with the Session and Resource Control (SRC) software.

**services**—(Optional) Restart a service.

**services pgcp gateway gateway-name**—(Optional) Restart the pgcpd process for a specific border gateway function (BGF) running on an MS-PIC. This option does not restart the pgcpd process running on the Routing Engine. To restart the pgcpd process on the Routing Engine, use the **pgcp-service** option.

**sflow-service**—(EX Series switches only) (Optional) Restart the flow sampling (sFlow technology) process.

**snmp**—(Optional) Restart the SNMP process, which enables the monitoring of network devices from a central location and provides the router's or switch's SNMP master agent.

**soft**—(Optional) Reread and reactivate the configuration without completely restarting the software processes. For example, BGP peers stay up and the routing table stays constant. Omitting this option results in a graceful restart of the software process.

**static-subscribers**—(Optional) Restart the static subscribers process, which associates subscribers with statically configured interfaces and provides dynamic service activation and activation for these subscribers.

**statistics-service**—(Optional) Restart the process that manages the Packet Forwarding Engine statistics.

**subscriber-management**—(Optional) Restart the Subscriber Management process.

**subscriber-management-helper**—(Optional) Restart the Subscriber Management Helper process.

**tunnel-oamd**—(Optional) Restart the Tunnel OAM process, which enables the Operations, Administration, and Maintenance of Layer 2 tunneled networks. Layer 2 protocol



tunneling (L2PT) allows service providers to send Layer 2 PDUs across the provider's cloud and deliver them to Juniper Networks EX Series Ethernet Switches that are not part of the local broadcast domain.

**usb-control**—(J Series routers and MX Series routers only) (Optional) Restart the USB control process.

**vrrp**—(ACX Series routers, EX Series switches, and MX Series routers only) (Optional) Restart the Virtual Router Redundancy Protocol (VRRP) process, which enables hosts on a LAN to make use of redundant routing platforms on that LAN without requiring more than the static configuration of a single default route on the hosts.

**web-management**—(J Series routers, QFX Series, EX Series switches, and MX Series routers only) (Optional) Restart the Web management process.

**Required Privilege Level**

reset

**Related Documentation**

- [Overview of Junos OS CLI Operational Mode Commands on page 51](#)

**List of Sample Output**

[restart interfaces on page 4692](#)

**Output Fields**

When you enter this command, you are provided feedback on the status of your request.

## Sample Output

[restart interfaces](#)

```
user@host> restart interfaces
interfaces process terminated
interfaces process restarted
```



## show dcbx

<b>Syntax</b>	show dcbx
<b>Release Information</b>	Command introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	List DCBX status (enabled or disabled) and the interfaces on which DCBX is enabled.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show dcbx neighbors on page 4694</a></li> <li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li> </ul>
<b>Output Fields</b>	<a href="#">Table 326 on page 4693</a> lists the output fields for the <b>show dcbx</b> command. Output fields are listed in the approximate order in which they appear.

**Table 326: show dcbx output fields**

Field Name	Field Description
DCBX	Status of DCBX on the switch or for the specified interface: <ul style="list-style-type: none"> <li>• Enabled—DCBX is enabled on the switch or on the specified interface</li> <li>• Disabled—DCBX is disabled on the switch or on the specified interface</li> </ul>
Interface	Name of the interface

## Sample Output

```

show dcbx
user@switch> show dcbx
DCBX                               : Enabled
Interface      DCBX
xe-0/0/9.0     enabled
xe-0/0/32.0    enabled
xe-0/0/36.0    enabled

```



## show dcbx neighbors

<b>Syntax</b>	<b>show dcbx neighbors</b> <code>&lt;interface interface-name&gt;</code> <code>&lt;terse&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series. Command introduced in Junos OS Release 11.3 for EX Series switches.
<b>Description</b>	Display information about Data Center Bridging Capability Exchange protocol (DCBX) neighbor interfaces.
<b>Options</b>	<b>none</b> —Display information about all DCBX neighbor interfaces. <b>interface-name</b> —(Optional) Display information for the specified interface. <b>terse</b> —Display the specified level of output.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li> <li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li> <li>• <a href="#">Example: Configuring an FCoE Transit Switch</a></li> <li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li> <li>• <a href="#">Understanding DCB Features and Requirements on page 4389</a></li> <li>• <a href="#">Understanding Data Center Bridging Capability Exchange Protocol for EX Series Switches</a></li> <li>• <a href="#">dcbx on page 4617</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show dcbx neighbors interface (QFX Series, DCBX Version 1.01 Mode) on page 4707</a> <a href="#">show dcbx neighbors interface (QFX Series, IEEE DCBX Mode) on page 4709</a> <a href="#">show dcbx neighbors terse (QFX Series) on page 4711</a> <a href="#">show dcbx neighbors (EX4500 Switch: FCoE Interfaces on Both Local and Peer with PFC Configured Compatibly) on page 4711</a> <a href="#">show dcbx neighbors (EX4500 Switch: DCBX Interfaces on Local and Peer Are Configured Compatibly with iSCSI Application) on page 4714</a> <a href="#">show dcbx neighbors (EX4500 Switch: Includes ETS) on page 4716</a>
<b>Output Fields</b>	<a href="#">Table 327 on page 4694</a> lists the output fields for the <b>show dcbx neighbors</b> command. Output fields are listed in the approximate order in which they appear.

Table 327: show dcbx neighbors Output Fields

Field Name	Field Description
Interface	Name of the interface.



Table 327: show dcbx neighbors Output Fields (*continued*)

Field Name	Field Description
Parent Interface	Name of the link aggregation group (LAG) interface to which the DCBX interface belongs.
Active-application-map	Name of the application map applied to the interface.
Protocol-Mode	<p>(QFX Series) DCBX protocol mode the interface uses:</p> <ul style="list-style-type: none"> <li>IEEE DCBX Version—The interface uses IEEE DCBX mode.</li> <li>DCBX Version 1.01—The interface uses DCBX version 1.01.</li> </ul> <p><b>NOTE:</b> On interfaces that use the IEEE DCBX mode, the <b>show dcbx neighbors interface <i>interface-name</i></b> operational command does not include application, PFC, or ETS operational state in the output.</p>
Protocol-State	<p>(DCBX Version 1.01 only) DCBX protocol state synchronization status:</p> <ul style="list-style-type: none"> <li><b>in-sync</b>—The local interface received an acknowledge message from the peer to indicate that the peer received a state change message sent by the local interface.</li> <li><b>ack-pending</b>—The local interface has not yet received an acknowledge message from the peer to indicate that the peer received a state change message sent by the local interface.</li> </ul>
Local-Advertisement	<p>(DCBX Version 1.01 only)</p> <p>Status of advertisements that the local interface sends to the peer.</p>
Operational version	Version of the DCBX standard used.
sequence-number	<p>Number of state change messages sent to the peer.</p> <p>If the interface <b>Protocol-State</b> value is <b>in-sync</b>, this number should match the <b>acknowledge-id</b> number in the <b>Peer-Advertisement</b> section.</p> <p>If the interface <b>Protocol-State</b> value is <b>ack-pending</b>, this number does not match the <b>acknowledge-id</b> number in the <b>Peer-Advertisement</b> section.</p>
acknowledge-id	<p>Number of acknowledge messages received from the peer.</p> <p>If the <b>Protocol-State</b> value is <b>in-sync</b>, this number should match the <b>sequence-number</b> value in the <b>Peer-Advertisement</b> section.</p> <p>If the <b>Protocol-State</b> value is <b>ack-pending</b>, this number does not match the <b>sequence-number</b> value in the <b>Peer-Advertisement</b> section.</p>



Table 327: show dcbx neighbors Output Fields (*continued*)

Field Name	Field Description
<b>Peer-Advertisement</b>	(DCBX Version 1.01 only)  Status of advertisements that the peer sends to the local interface.
<b>Operational version</b>	Version of the DCBX standard used.
<b>sequence-number</b>	Number of state change messages the peer sent to the local interface.  If this number matches the <b>acknowledge-id</b> number in the <b>Local-Advertisement</b> field, this indicates that the local interface has acknowledged all of the peer's state change messages and is synchronized.  If this number does not match the <b>acknowledge-id</b> number in the <b>Local-Advertisement</b> field, this indicates that the peer has not yet received an acknowledgment for a state change message from the local interface.
<b>acknowledge-id</b>	Number of acknowledge messages the peer has received from the local interface.  If this number matches the <b>sequence-number</b> value in the <b>Local-Advertisement</b> field, this indicates that the peer has acknowledged all of the local interface's state change messages and is in synchronization.  If this number does not match the <b>sequence-number</b> value in the <b>Local-Advertisement</b> field, this indicates that the peer has not yet sent an acknowledgment for a state change message from the local interface.



Table 327: show dcbx neighbors Output Fields (*continued*)

Field Name	Field Description
<b>Feature: PFC</b>	Priority-based flow control (PFC) feature DCBX state information.
<b>Protocol-State</b>	(DCBX Version 1.01 only)  DCBX protocol state synchronization status: <ul style="list-style-type: none"> <li>• <b>ack-pending</b>—The local interface has not yet received an acknowledge message from the peer to indicate that the peer received a PFC state change message sent by the local interface.</li> <li>• <b>in-sync</b>—The local interface received an acknowledge message from the peer to indicate that the peer received a PFC state change message sent by the local interface.</li> <li>• <b>not-applicable</b>—PFC autonegotiation is disabled.</li> </ul>
<b>Operational State</b>	(DCBX Version 1.01 only)  Operational state of the feature: <b>enabled</b> or <b>disabled</b> .
<b>Local-Advertisement</b>	Status of advertisements that the local interface sends to the peer.
<b>Enable</b>	(DCBX Version 1.01 only)  State that the local interface advertises to the peer: <ul style="list-style-type: none"> <li>• <b>Yes</b>—The feature is enabled.</li> <li>• <b>No</b>—The feature is disabled.</li> </ul>
<b>Willing</b>	Willingness of the local interface to learn the PFC configuration from the peer using DCBX: <ul style="list-style-type: none"> <li>• <b>Yes</b>—The local interface is willing to learn the PFC configuration from the peer.</li> <li>• <b>No</b>—The local interface is not willing to learn the PFC configuration from the peer.</li> </ul>
<b>Mac auth Bypass Capability</b>	(IEEE DCBX only)  (QFX Series) Media access controller (MAC) authentication bypass provides access to devices based on MAC address authentication. This is not supported, so the only value seen in the local advertisement field is <b>no</b> .
<b>Error</b>	(DCBX Version 1.01 only)  Configuration compatibility error status: <ul style="list-style-type: none"> <li>• <b>No</b>—No error detected. Local and peer configuration are compatible.</li> <li>• <b>Yes</b>—Error detected. Local and peer configuration are not compatible.</li> </ul>



Table 327: show dcbx neighbors Output Fields (*continued*)

Field Name	Field Description
<b>Operational State</b>	<p>PFC operational state on the interface:</p> <ul style="list-style-type: none"> <li>• <b>Enabled</b>—PFC is enabled on the interface</li> <li>• <b>Disabled</b>—PFC is disabled on the interface</li> </ul>
<b>Maximum Traffic Classes capable to support PFC</b>	<p>Largest number of traffic classes the local interface supports for PFC:</p> <ul style="list-style-type: none"> <li>• <b>6</b> (EX Series switches)</li> <li>• <b>8</b> (QFX Series)</li> </ul>
<b>Code Point</b>	<p>PFC code point, which is specified in the 3-bit class-of-service field in the VLAN header.</p>
<b>Admin Mode</b>	<p>PFC administrative state for each code point on the local interface:</p> <ul style="list-style-type: none"> <li>• <b>Enabled</b>—PFC is enabled for the code point.</li> <li>• <b>Disabled</b>—PFC is disabled for the code point.</li> </ul>
<b>Operational Mode</b>	<p>(QFX Series) PFC operational mode for each code point:</p> <ul style="list-style-type: none"> <li>• <b>Enable</b>—PFC is enabled on the code point.</li> <li>• <b>Disable</b>—PFC is disabled on the code point.</li> </ul>
<b>Peer-Advertisement</b>	<p>Status of advertisements that the peer sends to the local interface.</p>
<b>Enable</b>	<p>(DCBX Version 1.01 only)</p> <p>State that the peer advertises to the local interface:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b>—The feature is enabled.</li> <li>• <b>No</b>—The feature is disabled.</li> </ul>
<b>Willing</b>	<p>Willingness of the peer to learn the PFC configuration from the local interface using DCBX:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b>—The peer is willing to learn the PFC configuration from the local interface.</li> <li>• <b>No</b>—The peer is not willing to learn the PFC configuration from the local interface.</li> </ul>
<b>Error</b>	<p>(DCBX Version 1.01 only)</p> <p>Configuration compatibility error status:</p> <ul style="list-style-type: none"> <li>• <b>No</b>—No error detected. Local and peer configuration are compatible.</li> <li>• <b>Yes</b>—Error detected. Local and peer configuration are not compatible.</li> </ul>



Table 327: show dcbx neighbors Output Fields (*continued*)

Field Name	Field Description
<b>Operational State</b>	<p>PFC operational state on the interface:</p> <ul style="list-style-type: none"> <li>• <b>Enabled</b>—PFC is enabled on the interface</li> <li>• <b>Disabled</b>—PFC is disabled on the interface</li> </ul>
<b>Mac auth Bypass Capability</b>	<p>(IEEE DCBX only)</p> <p>(QFX Series) Media access controller (MAC) authentication bypass provides access to devices based on MAC address authentication. Although the QFX Series does not support this feature, the connected peer might support it. This field reports the peer state:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b>—The connected peer supports MAC authentication bypass.</li> <li>• <b>No</b>—The connected peer does not support MAC authentication bypass.</li> </ul>
<b>Maximum Traffic Classes capable to support PFC</b>	<p>Largest number of traffic classes the peer supports for PFC:</p> <ul style="list-style-type: none"> <li>• <b>6</b> (EX Series switches)</li> <li>• <b>8</b> (QFX Series)</li> </ul>
<b>Code Point</b>	<p>PFC code point, which is specified in the 3-bit class-of-service field in the VLAN header.</p>
<b>Admin Mode</b>	<p>PFC administrative state for each code point on the peer:</p> <ul style="list-style-type: none"> <li>• <b>Enabled</b>—PFC is enabled for the code point.</li> <li>• <b>Disabled</b>—PFC is disabled for the code point.</li> </ul>



Table 327: show dcbx neighbors Output Fields (*continued*)

Field Name	Field Description
<b>Feature: Application</b>	State information for the DCBX application.
<b>Protocol-State</b>	<p>(DCBX Version 1.01 only)</p> <p>DCBX protocol state synchronization status:</p> <ul style="list-style-type: none"> <li>• <b>in-sync</b>—The local interface received an acknowledge message from the peer to indicate that the peer received an FCoE state change message sent by the local interface.</li> <li>• <b>ack-pending</b>—The local interface has not yet received an acknowledge message from the peer to indicate that the peer received an FCoE state change message sent by the local interface.</li> <li>• <b>not-applicable</b>—The local interface is set to <b>no-auto-negotiation</b> (autonegotiation is disabled). If the interface is associated with an FCoE forwarding class, the interface advertises FCoE capability even if the connected peer does not advertise FCoE capability.</li> </ul>
<b>Local-Advertisement</b>	<p>Status of advertisements that the local interface sends to the peer.</p> <p>If the local interface is set to <b>no-auto-negotiation</b> (autonegotiation is disabled), the local advertisement portion of the output is not shown.</p>
<b>Enable</b>	<p>(DCBX Version 1.01 only)</p> <p>State that the local interface advertises to the peer:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b>—The feature is enabled.</li> <li>• <b>No</b>—The feature is disabled.</li> </ul>
<b>Willing</b>	<p>(DCBX Version 1.01 only)</p> <p>Willingness of the local interface to learn the FCoE interface state from the peer using DCBX:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b>—The local interface is willing to learn the FCoE interface state from the peer.</li> <li>• <b>No</b>—The local interface is not willing to learn the FCoE interface state from the peer.</li> </ul>
<b>Error</b>	<p>(DCBX Version 1.01 only)</p> <p>Configuration compatibility error status:</p> <ul style="list-style-type: none"> <li>• <b>No</b>—No error detected. The local and peer configuration are compatible.</li> <li>• <b>Yes</b>—Error detected. The local and peer configuration are not compatible.</li> </ul>
<b>Appl-Name</b>	Name of the application:



Table 327: show dcbx neighbors Output Fields (*continued*)

Field Name	Field Description
<b>Ethernet-Type</b>	<p>(DCBX Version 1.01 only)</p> <p>Ethernet type (EtherType) of the application. For example, <b>0x8906</b> indicates the EtherType for the FCoE application. Either the EtherType (for Layer 2 applications) or the Socket Number (for Layer 4 applications) of the application is displayed in the output.</p>
<b>Socket-Number</b>	<p>Destination port socket number of the application, if applicable. Either the EtherType (for Layer 2 applications) or the Socket Number (for Layer 4 applications) of the application is displayed in the output.</p>
<b>Priority-Field or Priority-Map</b>	<p>Priority assigned to the application.</p> <p>For EX Series switches, the priority of the FCoE application is determined by the PFC congestion notification profile that has been configured and associated with the FCoE interface. For other applications, the priority is based on the application map.</p>
<b>Status</b>	<p>(DCBX Version 1.01 only)</p> <p>Local status when autonegotiation is enabled:</p> <ul style="list-style-type: none"> <li>• <b>Enabled</b>—The application feature is enabled on both the local interface and the peer interface. (The local configuration and the peer configuration match.)</li> <li>• <b>Disabled</b>—The local configuration and the peer configuration do not match.</li> </ul> <p><b>NOTE:</b> If there is a configuration mismatch in one application between the switch and the peer, all the other applications including FCoE are disabled.</p>
<b>Peer-Advertisement</b>	<p>Status of advertisements that the peer sends to the local interface.</p>
<b>Enable</b>	<p>(DCBX Version 1.01 only)</p> <p>State that the peer advertises to the local interface:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b>—The feature is enabled.</li> <li>• <b>No</b>—The feature is disabled.</li> </ul>
<b>Willing</b>	<p>(DCBX Version 1.01 only)</p> <p>Willingness of the peer to learn the FCoE interface state from the local interface using DCBX:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b>—The peer is willing to learn the FCoE interface state from the local interface.</li> <li>• <b>No</b>—The peer is not willing to learn the FCoE interface state from the local interface.</li> </ul>



Table 327: show dcbx neighbors Output Fields (*continued*)

Field Name	Field Description
<b>Error</b>	(DCBX Version 1.01 only)  Configuration compatibility error status: <ul style="list-style-type: none"> <li>• <b>No</b>—No error detected. Local and peer configuration are compatible.</li> <li>• <b>Yes</b>—Error detected. Local and peer configuration are not compatible.</li> </ul>
<b>Appl-Name</b>	Name of the application: <ul style="list-style-type: none"> <li>• <b>FCoE</b>—Fibre Channel over Ethernet</li> </ul>
<b>Ethernet-Type</b>	Ethernet type (EtherType) of the application. For example, <b>0x8906</b> indicates the EtherType for the FCoE application. Either the EtherType (for Layer 2 applications) or the Socket-Number (for Layer 4 applications) of the application is displayed in the output.
<b>Socket-Number</b>	Destination port socket number of the application, if applicable. Either the EtherType (for Layer 2 applications) or the Socket Number (for Layer 4 applications) of the application is displayed in the output.
<b>Priority-Field or Priority-Map</b>	Priority assigned to the application.
<b>Status</b>	(DCBX Version 1.01 only)  Peer interface status: <ul style="list-style-type: none"> <li>• <b>Enabled</b>—The application feature is enabled on both the local interface and the peer interface. (The local configuration and the peer configuration match.)</li> <li>• <b>Disabled</b>—The local configuration and the peer configuration do not match.</li> </ul>



Table 327: show dcbx neighbors Output Fields (*continued*)

Field Name	Field Description
<b>Feature: ETS</b>	Enhanced Transmission Selection (ETS) DCBX state information.
<b>Protocol-State</b>	(DCBX Version 1.01 only)  ETS protocol state synchronization status: <ul style="list-style-type: none"> <li>• <b>in-sync</b>—The local interface received an acknowledge message from the peer to indicate that the peer received an ETS state change message sent by the local interface.</li> <li>• <b>ack-pending</b>—The local interface has not yet received an acknowledge message from the peer to indicate that the peer received an ETS state change message sent by the local interface.</li> </ul>
<b>Operational State</b>	(DCBX Version 1.01 only)  Operational state of the feature, <b>enabled</b> or <b>disabled</b> .
<b>Local-Advertisement</b>	Status of advertisements that the local interface sends to the peer.
<b>Enable</b>	(DCBX Version 1.01 only)  State that the local interface advertises to the peer: <ul style="list-style-type: none"> <li>• <b>Yes</b>—The feature is enabled.</li> <li>• <b>No</b>—The feature is disabled.</li> </ul>
<b>TLV Type</b>	(IEEE DCBX only)  Type of ETS TLV: <ul style="list-style-type: none"> <li>• <b>Configuration</b>—Advertises the Configuration TLV, which communicates the local ETS configuration to the peer but does not ask the peer to use the configuration.</li> <li>• <b>Recommendation</b>—Advertises the Recommendation TLV, which communicates the local ETS configuration to the peer, and if the peer is “willing,” configures the peer interface to match the local ETS configuration.</li> <li>• <b>Recommendation-or-Configuration</b>—Advertises both TLVs.</li> </ul>
<b>Willing</b>	Willingness of the local interface to learn the ETS state from the peer using DCBX (EX Series switches always advertise <b>No</b> for this field): <ul style="list-style-type: none"> <li>• <b>Yes</b>—Local interface is willing to learn the ETS state from the peer.</li> <li>• <b>No</b>—Local interface is not willing to learn the ETS state from the peer.</li> </ul>
<b>Credit Based Shaper</b>	



Table 327: show dcbx neighbors Output Fields (*continued*)

Field Name	Field Description
	(IEEE DCBX only)  Alternative method of flow control to buffer-to-buffer credit. The QFX Series does not support a credit-based shaper, so the value of this field is always <b>No</b> .
<b>Error</b>	(DCBX Version 1.01 only)  Configuration error status: <ul style="list-style-type: none"> <li>• <b>No</b>—No error. This should always be the switch ETS error state.</li> <li>• <b>Yes</b>—Error detected.</li> </ul>
<b>Maximum Traffic Classes capable to support PFC</b>	(DCBX Version 1.01 only)  Largest number of traffic classes the local interface supports for PFC.
<b>Maximum Traffic Classes supported</b>	(IEEE DCBX only)  Largest number of traffic classes the local interface supports for ETS. (EX Series switches support only one traffic class for ETS. However, a different value might be shown for this field.)
<b>Code Point</b>	PFC code point, which is specified in the 3-bit class-of-service field in the VLAN header.
<b>Priority-Group</b>	Class-of-service (CoS) priority group (forwarding class set) identification number.
<b>Percentage B/W</b>	Configured minimum percentage of link bandwidth allocated to the priority group. Only explicitly configured values appear in this output column. If the link bandwidth is the default percentage, it is not shown. (EX Series switches allocate 100% of link bandwidth to the default priority group, group 7.)
<b>Transmission Selection Algorithm</b>	(IEEE DCBX only)  The transmission selection algorithm used by the interface. The QFX Series supports ETS but does not support using the credit-based shaper algorithm, so the only value shown in this field is <b>ETS</b> .
<b>Peer-Advertisement</b>	Status of advertisements that the peer sends to the local interface.
<b>Enable</b>	



Table 327: show dcbx neighbors Output Fields (*continued*)

Field Name	Field Description
	(DCBX Version 1.01 only)  State that the peer advertises to the local interface: <ul style="list-style-type: none"> <li>• <b>Yes</b>—The feature is enabled.</li> <li>• <b>No</b>—The feature is disabled.</li> </ul>
<b>TLV Type</b>	(IEEE DCBX only)  Type of ETS TLV: <ul style="list-style-type: none"> <li>• <b>Configuration</b>—Advertises the Configuration TLV, which communicates the local ETS configuration to the peer but does not ask the peer to use the configuration.</li> <li>• <b>Recommendation</b>—Advertises the Recommendation TLV, which communicates the local ETS configuration to the peer, and if the peer is “willing,” configures the peer interface to match the local ETS configuration.</li> <li>• <b>Configuration/Recommendation</b>—Advertises both TLVs.</li> </ul>
<b>Willing</b>	Willingness of the peer to learn the ETS state from the local interface using DCBX: <ul style="list-style-type: none"> <li>• <b>Yes</b>—Peer is willing to learn the ETS state from the local interface.</li> <li>• <b>No</b>—Peer is not willing to learn the ETS state from the local interface.</li> </ul>
<b>Credit Based Shaper</b>	(IEEE DCBX only)  Alternative method of flow control to buffer-to-buffer credit. The QFX Series does not support a credit-based shaper, so the value of this field is always <b>No</b> .
<b>Error</b>	(DCBX Version 1.01 only)  Configuration error status of the peer: <ul style="list-style-type: none"> <li>• <b>No</b>—No error in peer ETS TLV.</li> <li>• <b>Yes</b>—Error in peer ETS TLV.</li> </ul>
<b>Maximum Traffic Classes capable to support PFC</b>	(DCBX Version 1.01 only)  Largest number of traffic classes the local interface supports for PFC.
<b>Maximum Traffic Classes supported</b>	(IEEE DCBX only)  Largest number of traffic classes the local interface supports for ETS. (EX Series switches support only one traffic class for ETS. However, a different value might be shown for this field.)
<b>Code Point</b>	



Table 327: show dcbx neighbors Output Fields (*continued*)

Field Name	Field Description
	PFC code point, which is specified in the 3-bit class-of-service field in the VLAN header.
<b>Priority-Group</b>	CoS priority group (forwarding class set) identification number.
<b>Percentage B/W</b>	Configured minimum percentage of link bandwidth allocated to the priority group. (EX Series switches allocate 100% of link bandwidth to the default priority group, group 7.)
<b>Transmission Selection Algorithm</b>	(IEEE DCBX only)  Transmission selection algorithm used by the interface. The QFX Series supports ETS but does not support using the credit-based shaper algorithm, so the only value shown in this field is <b>ETS</b> .
<b>PFC</b>	(QFX Series, <b>terse</b> option only) DCBX TLV advertisement state for PFC: <ul style="list-style-type: none"> <li>• Disabled—PFC configuration matches the configuration on the connected peer and PFC is disabled</li> <li>• Enabled—PFC configuration matches the configuration on the connected peer and PFC is enabled</li> <li>• Not Advt—Interface does not advertise PFC to the connected peer</li> </ul>
<b>ETS</b>	( <b>terse</b> option only) Local DCBX TLV advertisement state for ETS: <ul style="list-style-type: none"> <li>• Advt—Interface advertises ETS TLVs</li> <li>• Disabled—ETS is disabled on the interface (interface does not advertise ETS)</li> </ul>
<b>ETS Rec</b>	( <b>terse</b> option only) DCBX TLV peer advertisement state for ETS (state received from the connected DCBX peer): <ul style="list-style-type: none"> <li>• Advt—Peer interface advertises ETS TLVs</li> <li>• Not Advt—Peer interface does not advertise ETS</li> </ul> <p><b>NOTE:</b> When the DCBX mode is DCBX version 1.01, no peer information is displayed.</p>



Table 327: show dcbx neighbors Output Fields (*continued*)

Field Name	Field Description
Version	<p>(<b>terse</b> option only) The DCBX version used on the interface and whether the DCBX version was autonegotiated or explicitly configured:</p> <ul style="list-style-type: none"><li>• <b>IEEE</b>—The interface uses IEEE DCBX.</li><li>• <b>1.01</b>—The interface uses DCBX version 1.01.</li></ul> <p>When the DCBX version used is the result of autonegotiation, the term (<b>Auto</b>) appears next to the version. For example, <b>IEEE (Auto)</b> indicates that the interface autonegotiated with the connected peer to use IEEE DCBX. Autonegotiation is enabled by default.</p>

## Sample Output

```
show dcbx neighbors interface (QFX Series, user@switch> show dcbx neighbors interface xe-0/0/0
Interface : xe-0/0/0.0 - Parent Interface: ae0.0
Active-application-map: app-map-1
```



**DCBX Version 1.01  
Mode)**

Protocol-State: in-sync  
Protocol-Mode: DCBX Version 1.01

Local-Advertisement:  
Operational version: 1  
sequence-number: 130, acknowledge-id: 102

Peer-Advertisement:  
Operational version: 1  
sequence-number: 102, acknowledge-id: 130

Feature: PFC, Protocol-State: in-sync

Operational State: Enabled

Local-Advertisement:  
Enable: Yes, Willing: No, Error: No  
Maximum Traffic Classes capable to support PFC: 8

Code Point	Admin Mode	Operational Mode
000	Disabled	Disable
001	Disabled	Disable
010	Disabled	Disable
011	Enabled	Enable
100	Enabled	Enable
101	Disabled	Disable
110	Disabled	Disable
111	Disabled	Disable

Peer-Advertisement:  
Enable: Yes, Willing: No, Error: No  
Maximum Traffic Classes capable to support PFC: 8

Code Point	Admin Mode
000	Disabled
001	Disabled
010	Disabled
011	Enabled
100	Enabled
101	Disabled
110	Disabled
111	Disabled

Feature: Application, Protocol-State: in-sync

Local-Advertisement:  
Enable: Yes, Willing: No, Error: No

AppI-Name	Ethernet-Type	Socket-Number	Priority-Map	Status
FCoE	0x8906		00001110	Enabled
iSCSI		3260	10000000	Enabled

Peer-Advertisement:  
Enable: Yes, Willing: Yes, Error: No

AppI-Name	Ethernet-Type	Socket-Number	Priority-Map	Status
FCoE	0x8906	N/A	00001110	Enabled



Feature: ETS, Protocol-State: in-sync

Operational State: Enabled

Local-Advertisement:

Enable: Yes, Willing: No, Error: No

Maximum Traffic Classes capable to support PFC: 8

Code Point	Priority-Group
000	0
001	7
010	7
011	7
100	0
101	1
110	1
111	7

Priority-Group	Percentage B/W
0	40%
1	5%

Peer-Advertisement:

Enable: Yes, Willing: No, Error: No

Maximum Traffic Classes capable to support PFC: 8

Code Point	Priority-Group
000	0
001	7
010	7
011	7
100	0
101	1
110	1
111	7

Priority-Group	Percentage B/W
0	40%
1	5%

**show dcbx neighbors  
interface (QFX Series,  
IEEE DCBX Mode)**

user@switch> **show dcbx neighbors interface xe-0/0/0**

Interface : xe-0/0/0.0 - Parent Interface: ae0.0

Active-application-map: app-map-1

Protocol-Mode: IEEE-DCBX Version

Feature: PFC

Local-Advertisement:

Willing: No

Mac auth Bypass Capability: No

Operational State: Enabled

Maximum Traffic Classes capable to support PFC: 8

Code Point	Admin Mode
000	Disabled
001	Disabled
010	Disabled



011	Enabled
100	Enabled
101	Disabled
110	Disabled
111	Disabled

**Peer-Advertisement:**

Willing: No  
Mac auth Bypass Capability: No  
Operational State: Enabled

Maximum Traffic Classes capable to support PFC: 8

Code Point	Admin Mode
000	Disabled
001	Disabled
010	Disabled
011	Enabled
100	Enabled
101	Disabled
110	Disabled
111	Disabled

**Feature: Application****Local-Advertisement:**

Appl-Name	Ethernet-Type	Socket-Number	Priority-field
FCoE	0x8906		00001110
iSCSI		3260	10000000

**Peer-Advertisement:**

Appl-Name	Ethernet-Type	Socket-Number	Priority-field
FCoE	0x8906	N/A	00001110

**Feature: ETS****Local-Advertisement:**

TLV Type: Configuration/Recommendation  
Willing: No  
Credit Based Shaper: No  
Maximum Traffic Classes supported: 3

Code Point	Priority-Group
000	0
001	7
010	7
011	7
100	0
101	1
110	1
111	7

Priority-Group	Percentage B/W
0	40%
1	5%

Priority-Group	Transmission Selection Algorithm
0	Enhanced Transmission Selection
1	Enhanced Transmission Selection



## Peer-Advertisement:

TLV Type: Configuration

Willing: No

Credit Based Shaper: No

Code Point	Priority-Group
000	0
001	7
010	7
011	7
100	0
101	1
110	1
111	7

Priority-Group	Percentage B/W
0	40%
1	5%

Priority-Group	Transmission Selection Algorithm
0	Enhanced Transmission Selection
1	Enhanced Transmission Selection

## Peer-Advertisement:

TLV Type: Recommendation

Code Point	Priority-Group
000	0
001	7
010	7
011	7
100	0
101	1
110	1
111	7

Priority-Group	Percentage B/W
0	40%
1	5%

Priority-Group	Transmission Selection Algorithm
0	Enhanced Transmission Selection
1	Enhanced Transmission Selection

**show dcbx neighbors  
terse (QFX Series)**user@switch> **show dcbx neighbors terse**

Interface	Parent Interface	PFC	ETS	ETS	Version Rec
xe-0/0/8.0	-	Enabled	Advt	Advt	IEEE (Auto)
xe-0/0/9.0	-	Disabled	Disabled		1.01
xe-0/0/11.0	ae0.0	Enabled	Advt	Advt	IEEE (Auto)
xe-0/0/12.0	ae0.0	Enabled	Advt	Advt	IEEE (Auto)
xe-0/0/32.0	-	Enabled	Advt	Not Advt	IEEE
xe-0/0/36.0	-	Not Advt	Advt	Advt	IEEE

**show dcbx neighbors**user@switch> **show dcbx neighbors interface xe-0/0/14**



(EX4500 Switch: FCoE  
Interfaces on Both  
Local and Peer with

Interface : xe-0/0/14.0 - Parent Interface: ae0.0  
Protocol-State: in-sync

Local-Advertisement:



# PFC Configured Compatibly)

Operational version: 0  
sequence-number: 6, acknowledge-id: 6

Peer-Advertisement:  
Operational version: 0  
sequence-number: 6, acknowledge-id: 6

Feature: PFC, Protocol-State: in-sync

Operational State: Enabled

Local-Advertisement:  
Enable: Yes, Willing: No, Error: No  
Maximum Traffic Classes capable to support PFC: 6

Code Point	Admin Mode
000	Disabled
001	Disabled
010	Disabled
011	Enabled
100	Disabled
101	Disabled
110	Disabled
111	Disabled

Peer-Advertisement:  
Enable: Yes, Willing: No, Error: No  
Maximum Traffic Classes capable to support PFC: 6

Code Point	Admin Mode
000	Disabled
001	Disabled
010	Disabled
011	Enabled
100	Disabled
101	Disabled
110	Disabled
111	Disabled

Feature: Application, Protocol-State: in-sync

Local-Advertisement:  
Enable: Yes, Willing: No, Error: No <<< Error bit will not be set as  
there is no miss configuration between local and peer.

Appl-Name	Ethernet-Type	Socket-Number	Priority-Map	Status
FCoE	0x8906		00001000	Enabled

Peer-Advertisement:  
Enable: Yes, Willing: No, Error: No

Status	Appl-Name	Ethernet-Type	Socket-Number	Priority-Map
Enabled	FCoE	0x8906		00001000



show dcbx neighbors  
(EX4500 Switch:  
DCBX Interfaces on  
Local and Peer Are

```
user@switch> show dcbx neighbors interface xe-0/0/14  
  
Interface : xe-0/0/14.0 - Parent Interface: ae0.0  
  
Protocol-State: in-sync
```



### Configured Compatibly with iSCSI Application)

Active-application-map: iscsi-map

Local-Advertisement:

Operational version: 0  
sequence-number: 9, acknowledge-id: 12

Peer-Advertisement:

Operational version: 0  
sequence-number: 12, acknowledge-id: 9

Feature: PFC, Protocol-State: in-sync

Operational State: Enabled

Local-Advertisement:

Enable: Yes, Willing: No, Error: No  
Maximum Traffic Classes capable to support PFC: 6

Code Point	Admin Mode
000	Disabled
001	Disabled
010	Disabled
011	Enabled
100	Disabled
101	Disabled
110	Disabled
111	Disabled

Peer-Advertisement:

Enable: Yes, Willing: No, Error: No  
Maximum Traffic Classes capable to support PFC: 6

Code Point	Admin Mode
000	Disabled
001	Disabled
010	Disabled
011	Enabled
100	Disabled
101	Disabled
110	Disabled
111	Disabled

Feature: Application, Protocol-State: in-sync

Local-Advertisement:

Enable: Yes, Willing: No, Error: No

App1-Name	Ethernet-Type	Socket-Number	Priority-Map	Status
FCoE	0x8906		00001000	Enabled
iscsi		3260	00100000	Enabled

Peer-Advertisement:

Enable: Yes, Willing: No, Error: No

App1-Name	Ethernet-Type	Socket-Number	Priority-Map	Status
-----------	---------------	---------------	--------------	--------



FCoE	0x8906	00001000	Enabled
iscsi	3260	00100000	Enabled

**show dcbx neighbors**  
(EX4500 Switch:  
Includes ETS)

user@switch> **show dcbx neighbors interface xe-0/0/3**

Interface : xe-0/0/3.0  
Protocol-State: in-sync  
Active-application-map: map\_iscsi

Local-Advertisement:  
Operational version: 0  
sequence-number: 1, acknowledge-id: 5

Peer-Advertisement:  
Operational version: 0  
sequence-number: 5, acknowledge-id: 1

Feature: PFC, Protocol-State: in-sync

Operational State: Enabled

Local-Advertisement:  
Enable: Yes, Willing: No, Error: No  
Maximum Traffic Classes capable to support PFC: 6

Code Point	Admin Mode
000	Enabled
001	Enabled
010	Disabled
011	Disabled
100	Disabled
101	Disabled
110	Disabled
111	Disabled

Peer-Advertisement:  
Enable: Yes, Willing: Yes, Error: No  
Maximum Traffic Classes capable to support PFC: 8

Code Point	Admin Mode
000	Enabled
001	Disabled
010	Disabled
011	Disabled
100	Enabled
101	Disabled
110	Disabled
111	Disabled

Feature: Application, Protocol-State: in-sync

Local-Advertisement:  
Enable: Yes, Willing: No, Error: No

App1-Name	Ethernet-Type	Socket-Number	Priority-Map	Status
FCoE	0x8906		00000001	Enabled
iscsi		3260	00000010	Enabled



## Peer-Advertisement:

Enable: Yes, Willing: Yes, Error: No

App1-Name	Ethernet-Type	Socket-Number	Priority-Map	Status
FCoE	0x8906		00001000	Enabled
iscsi		3260	00010000	Enabled

Feature: ETS, Protocol-State: in-sync

Operational State: Enabled

## Local-Advertisement:

Enable: Yes, Willing: No, Error: No

Maximum Traffic Classes supported : 3

Code Point	Priority-Group
000	7
001	7
010	7
011	7
100	7
101	7
110	7
111	7

Priority-Group	Percentage B/W
7	100%

## Peer-Advertisement:

Enable: Yes, Willing: Yes, Error: No

Maximum Traffic Classes supported : 8

Code Point	Priority-Group
000	0
001	1
010	0
011	0
100	2
101	0
110	0
111	0

Priority-Group	Percentage B/W
0	30%
1	40%
2	30%



## show fibre-channel fabric

<b>Syntax</b>	<code>show fibre-channel fabric</code> <code>&lt;extensive   summary&gt;</code> <code>&lt;fabric-name&gt;</code> <code>&lt;sort-by (name   fabric-id)&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Fibre Channel fabric information.
<b>Options</b>	<p><b>fabric-name</b>—(Optional) Display output only for the specified fabric.</p> <p><b>extensive   summary</b>—(Optional) Display the specified level of output.</p> <p><b>sort-by (name   fabric-id)</b>—(Optional) Sort output by fabric name or fabric ID.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">fc-fabrics on page 4627</a></li> <li>• <a href="#">Configuring an FCoE-FC Gateway Fibre Channel Fabric on page 4576</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fibre-channel fabric on page 4719</a> <a href="#">show fibre-channel fabric extensive on page 4719</a>
<b>Output Fields</b>	<p><a href="#">Table 328 on page 4718</a> lists the output fields for the <b>show fibre-channel fabric</b> command. Output fields are listed in the approximate order in which they appear.</p>

**Table 328: show fibre-channel fabric Output Fields**

Field Name	Field Description	Level of Output
<b>Fabric</b>	Name of the fabric.	All
<b>Fabric-ID</b>	Identification number of the fabric.	All
<b>Type</b>	Type of fabric. All fabrics are <b>PROXY</b> fabrics.	All
<b>Interfaces</b>	Native Fibre Channel interfaces and FCoE interfaces assigned to the fabric.	All
<b>Created at</b>	Date and time the fabric was created.	<b>extensive</b>
<b>Internal Index</b>	Fabric index internal to Junos OS.	<b>extensive</b>
<b>Origin</b>	Origin information internal to Junos OS.	<b>extensive</b>
<b>Description</b>	Text description of the fabric.	<b>extensive</b>



Table 328: show fibre-channel fabric Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Fabric WWN</b>	Unique WWN of the fabric generated by the FCF.	<b>extensive</b>
<b>Login sessions</b>	Number of FIP login sessions currently running on the fabric.	<b>extensive</b>
<b>Configured max login sessions</b>	Configured maximum number of FIP login sessions permitted on the fabric.	<b>extensive</b>

## Sample Output

### show fibre-channel fabric

```
user@switch> show fibre-channel fabric
Fabric      Fabric-ID   Type      Interfaces
proxy2      200         PROXY     fc-0/0/0.0
                                     fc-0/0/1.0
```

### show fibre-channel fabric extensive

```
user@switch> show fibre-channel fabric extensive
Fabric: proxy2, Created at: Mon Apr 19 14:02:58 2010
Fabric-ID: 200, Internal index: 2, Origin: Static
Description: srv-fabric, Type: PROXY, Fabric WWN: 10:00:00:05:33:51:d7:cd
Login sessions: 200, Configured max login sessions: 500
      fc-0/0/0.0, (untagged)
      fc-0/0/1.0, (untagged)
```



## show fibre-channel fc2 sessions

**Syntax** `show fibre-channel fc2 sessions`  
`<fabric fabric-name>`  
`<brief | detail>`

**Release Information** Command introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Display Fibre Channel FC-2 information.



**NOTE:** A session is a FLOGI or FDISC login to the FC SAN fabric. Session does not refer to end-to-end storage sessions.

**Options** `fabric fabric-name`—(Optional) Display output only for the specified fabric.  
`brief | detail`—(Optional) Display the specified level of output.

**Required Privilege Level** view

**Related Documentation**

- [show fibre-channel fc2 statistics on page 4722](#)
- [clear fibre-channel fc2 statistics on page 4671](#)

**List of Sample Output** [show fibre-channel fc2 sessions on page 4721](#)  
[show fibre-channel fc2 sessions detail on page 4721](#)

**Output Fields** [Table 329 on page 4720](#) lists the output fields for the **show fibre-channel fc2 sessions** command. Output fields are listed in the approximate order in which they appear.

**Table 329: show fibre-channel fc2 sessions Output Fields**

Field Name	Field Description	Level of Output
Fabric	Name of the fabric.	All
Fabric-id	Identification number of the fabric.	All
Interface Name	Name of the interface.	All
Local FCID	Address of the local end of the connection.	All
Far FCID	Address of the far (remote) end of the connection.	All
# Pending Exchanges	Number of pending exchanges for the session.	All
Flags	Flags internal to Junos OS.	<b>detail</b>



Table 329: show fibre-channel fc2 sessions Output Fields (*continued*)

Field Name	Field Description	Level of Output
Refcount	Reference count internal to Junos OS.	detail
Users	Information internal to Junos OS.	detail

## Sample Output

```

show fibre-channel fc2 sessions user@switch> show fibre-channel fc2 sessions
Fabric: fip-proxy, Fabric-id: 1
Interface      Local      Far          # Pending
Name          FCID       FCID         Exchanges
fc-0/0/0.0    *          0xffffffffe  0
fc-0/0/1.0    *          0xffffffffe  0
fc-0/0/2.0    *          0xffffffffe  0

```

```

show fibre-channel fc2 sessions detail user@switch> show fibre-channel fc2 sessions detail
Fabric: fip-proxy, Fabric-id: 1
Interface Name  fc-0/0/0.0
Local FCID:    *
Far FCID:      0xffffffffe
Exchanges:     0
Flags:         SELF_LOCK USER_SYNCED
Refcount:      2
Users:         1

Interface Name  fc-0/0/1.0
Local FCID:    *
Far FCID:      0xffffffffe
Exchanges:     0
Flags:         SELF_LOCK USER_SYNCED
Refcount:      2

Interface Name  fc-0/0/2.0
Local FCID:    *
Far FCID:      0xffffffffe
Exchanges:     0
Flags:         SELF_LOCK USER_SYNCED
Refcount:      2
Users:         1

```



## show fibre-channel fc2 statistics

<b>Syntax</b>	<b>show fibre-channel fc2 statistics</b> <b>&lt;fabric <i>fabric-name</i>&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Fibre Channel FC-2 statistics.
<b>Options</b>	<b>fabric <i>fabric-name</i></b> —(Optional) Display output only for the specified fabric.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fibre-channel fc2 sessions on page 4720</a></li> <li>• <a href="#">clear fibre-channel fc2 statistics on page 4671</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fibre-channel fc2 statistics on page 4723</a>
<b>Output Fields</b>	<a href="#">Table 330 on page 4722</a> lists the output fields for the <b>show fibre-channel fc2 statistics</b> command. Output fields are listed in the approximate order in which they appear.

**Table 330: show fibre-channel fc2 statistics Output Fields**

Field Name	Field Description
<b>Global statistics</b>	Statistics for all fabrics.
<b>Frame buffers allocated</b>	Number of frame buffers currently allocated to all fabrics.
<b>Frame buffers freed</b>	Number of frame buffers freed.
<b>Frames dropped</b>	Number of dropped frames.
<b>Fabric statistics</b>	Fabric-specific statistics.
<b>Fabric</b>	Name of the fabric.
<b>Fabric-id</b>	Identification number of the fabric.
<b>Tx-FRJT</b>	Number of fabric frame rejects (F_RJT).
<b>Tx-PRJT</b>	Number of port frame rejects (P_RJT).
<b>Tx-LSRJT</b>	Number of link service rejections.
<b>Tx-ABTS</b>	Number of abort sequence frames sent.
<b>Rx-Drops</b>	Number of received frames dropped.



Table 330: show fibre-channel fc2 statistics Output Fields (*continued*)

Field Name	Field Description
Rx-ABTS	Number of abort sequence frames received.

## Sample Output

**show fibre-channel fc2 statistics**      user@switch> **show fibre-channel fc2 statistics**  
Global statistics:

Frame buffers allocated: 60  
Frame buffers freed:      60  
Frames dropped:           0

Fabric statistics:

Fabric : fip-proxy, Fabric-id: 1  
Tx-FRJT:      0  
Tx-PRJT:      0  
Tx-LSRJT:     0  
Tx-ABTS:      0  
Rx-Drops:     0  
Rx-ABTS:      0



## show fibre-channel fip

<b>Syntax</b>	<b>show fibre-channel fip</b> <b>&lt;brief   detail&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Fibre Channel over Ethernet Initialization Protocol (FIP) information.
<b>Options</b>	<b>brief   detail</b> —(Optional) Display the specified level of output.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring FIP on an FCoE-FC Gateway on page 4589</a></li> <li>• <a href="#">show fibre-channel fip enode on page 4729</a></li> <li>• <a href="#">show fibre-channel fip fabric on page 4733</a></li> <li>• <a href="#">show fibre-channel fip fcf on page 4736</a></li> <li>• <a href="#">show fibre-channel fip interface on page 4739</a></li> <li>• <a href="#">show fibre-channel fip statistics on page 4742</a></li> <li>• <a href="#">clear fibre-channel fip statistics on page 4673</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fibre-channel fip on page 4727</a> <a href="#">show fibre-channel fip detail on page 4727</a>
<b>Output Fields</b>	Table 331 on page 4724 lists the output fields for the <b>show fibre-channel fip</b> command. Output fields are listed in the approximate order in which they appear. A session is a FLOGI or FDISC login to the FC SAN fabric. Session does not refer to end-to-end storage sessions.

**Table 331: show fibre-channel fip Output Fields**

Field Name	Field Description	Level of Output
Configured max FIP sessions per Node Device	<p>Configured maximum number of FIP sessions permitted on the Node device.</p> <p>For QFabric systems, this is the maximum number of FIP sessions permitted on each Node device in the fabric.</p> <p>For QFX3500 devices, this is the maximum number of FIP sessions permitted on the device.</p>	<b>detail</b>
Node Device	Node device identifier.	<b>detail</b>
Total FIP sessions	Total number of FIP sessions on the FCoE-FC gateway switch.	<b>detail</b>



Table 331: show fibre-channel fip Output Fields (*continued*)

Field Name	Field Description	Level of Output
Total FCoE filters	Total number of FIP filters on the FCoE-FC gateway switch.	<b>detail</b>
Fabric Name	Name of the fabric and in parentheses the fabric ID.	All
FC-MAP	FCoE mapped address prefix of the FCoE forwarder for the fabric.	<b>detail</b>
FKA-ADV-PERIOD	Period of time in milliseconds between FIP keepalive advertisements configured for the FC fabric.	<b>detail</b>
MAX-SESSIONS-PER-ENODE	Maximum number of concurrent sessions (FLOGI and FDISC combined) that each ENode can instantiate.	<b>detail</b>
FCoE trusted	Whether ports on the FC fabric are trusted or untrusted: <ul style="list-style-type: none"> <li>• <b>Yes</b>—Ports on the FC fabric are trusted; FIP snooping is turned off.</li> <li>• <b>No</b>—Ports on the FC fabric are not trusted; FIP snooping is turned on.</li> </ul>	<b>detail</b>
Member	Information about an FCF that is a member of the fabric.	All
	• FCF-MAC	MAC address used in discovery advertisements. All
	• FKA-ADV-PERIOD	Period of time in milliseconds between FIP keepalive advertisements configured for the FC interface. <b>detail</b>
	• FKA-ADV-D-BIT	Disable FIP keepalive advertisement monitoring bit. The state is always <b>off</b> . <b>detail</b>
	• Type	Type of interface: <b>detail</b> <ul style="list-style-type: none"> <li>• <b>VF_Port Capable</b>—Interface can act as a VF_Port interface.</li> </ul>
	• Priority	Priority value associated with the switch FCF-MAC. Converged network adapters (CNAs) use the priority value to determine the switch with which they will perform FIP FLOGI. The lower the value, the higher the priority. <b>detail</b>  Value range: 0 through 255.
	• State	FIP state on the fabric: <b>detail</b> <ul style="list-style-type: none"> <li>• <b>Enable</b>—FIP is enabled on the fabric.</li> <li>• <b>Disable</b>—FIP is disabled on the fabric.</li> </ul>



Table 331: show fibre-channel fip Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>ENode</b>	Information about a connected FCoE node (ENode).	All
• <b>ENode-MAC</b>	MAC address of the connected ENode.	All
• <b>Enode State</b>	Login state internal to Junos OS.	All
• <b>Configured ENode timer</b>	User-configured FIP keepalive advertisement interval in milliseconds.	<b>detail</b>
• <b>Running ENode timer</b>	Runtime interval in milliseconds of the last FIP keepalive advertisement received. This value changes every time an FKA_ADV is received.	<b>detail</b>
• <b>Active FIP Sessions</b>	Number of active FIP sessions on the ENode.	<b>detail</b>
• <b>VN-Port-MAC</b>	MAC address of a VN_Port on the ENode.	All
• <b>Session State</b>	Session state internal to Junos OS.	<b>detail</b>
• <b>Configured FKA-ADV</b>	User-configured FIP keepalive advertisement interval in milliseconds.	<b>detail</b>
• <b>Running FKA-ADV</b>	Runtime interval in milliseconds of the last FIP keepalive advertisement received. This value changes every time an FKA_ADV is received.	<b>detail</b>
• <b>Configured VN-Port Timer</b>	Configured state of the VN_Port keepalive timer in milliseconds. This value is always 90 and is not user-configurable.	<b>detail</b>
• <b>Running VN-Port Timer</b>	Running state of the VN_Port keepalive timer in milliseconds.	<b>detail</b>
• <b>FCID</b>	Fibre Channel ID of the VN_Port.	<b>detail</b>
• <b>WWN</b>	Unique worldwide name of the VN_Port.	<b>detail</b>



## Sample Output

```

show fibre-channel fip user@switch> show fibre-channel fip
Fabric Name : proxy2 (200)
Member
FCF-MAC : 00:30:48:b0:ee:d2 (Interface vlan.100)
  ENode
    ENode-MAC : 00:10:94:00:00:02      State : Logged-in
    Session
      VN-Port-MAC      : 0e:fc:00:03:00:02
      VN-Port-MAC      : 0e:fc:00:03:00:01
    ENode-MAC : 00:10:94:00:00:03      State : Logged-in
    Session
      VN-Port-MAC      : 0e:fc:00:03:00:04
      VN-Port-MAC      : 0e:fc:00:03:00:03

show fibre-channel fip detail user@switch> show fibre-channel fip detail
Configured max FIP sessions per Node Device: 2500
Node Device: 0 Total FIP sessions: 4 Total FCoE filters: 4

Fabric Name : proxy2 (200)
FC-MAP      : 0e:fc:00
FKA-ADV-PERIOD : 90000      MAX-SESSIONS-PER-ENODE : 32
FCoE trusted : No

Member
FCF-MAC: 00:30:48:b0:ee:d2 (Interface vlan.100)
FKA-ADV-PERIOD : 90000      FKA-ADV-D-BIT-bit : Off
Type : VF_Port Capable
Priority : 86      State : Enable

ENode
ENode-MAC : 00:10:94:00:00:02      ENode State : Logged-in
Configured ENode timer: 8000      Running ENode timer: 12226
Active FIP Sessions : 2

  Session details
    VN-Port-MAC      : 0e:fc:00:03:00:02
    Session state      : Up
    Configured FKA-ADV : 90000
    Running FKA-ADV    : 0
    Configured VN-Port Timer : 90000
    Running VN-Port Timer : 213193
    FCID              : 0x2c1a01
    WWN               : 10:00:00:00:c9:a4:a3:cf

    VN-Port-MAC      : 0e:fc:00:03:00:01
    Session state      : Up
    Configured FKA-ADV : 90000
    Running FKA-ADV    : 0
    Configured VN-Port Timer : 90000
    Running VN-Port Timer : 213632
    FCID              : 0x2c1a02
    WWN               : 10:00:00:00:d9:b4:e3:df

ENode
ENode-MAC : 00:10:94:00:00:03      ENode State : Logged-in
Configured ENode timer: 8000      Running ENode timer: 12254
Active FIP Sessions : 2

```



Session details

VN-Port-MAC : 0e:fc:00:03:00:04  
Session state : Up  
Configured FKA-ADV : 90000  
Running FKA-ADV : 0  
Configured VN-Port Timer : 90000  
Running VN-Port Timer : 213480  
FCID : 0x2c1a03  
WWN : 21:00:00:c0:dd:11:09:13

VN-Port-MAC : 0e:fc:00:03:00:03  
Session state : Up  
Configured FKA-ADV : 90000  
Running FKA-ADV : 0  
Configured VN-Port Timer : 90000  
Running VN-Port Timer : 214004  
FCID : 0x2c1a04  
WWN : 21:00:00:c0:df:12:08:14



## show fibre-channel fip enode

<b>Syntax</b>	<b>show fibre-channel fip enode <i>enode-mac</i></b> <b>&lt;brief   detail&gt;</b> <b>&lt;vn-port-mac <i>vn-port-mac</i>&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Fibre Channel over Ethernet (FCoE) Initialization Protocol (FIP) information for a specified ENode or a specified VN_Port on an ENode.
<b>Options</b>	<b>brief   detail</b> —(Optional) Display the specified level of output.  <b><i>enode-mac</i></b> —Display information for the ENode specified by the MAC address.  <b>vn-port-mac <i>vn-port-mac</i></b> —(Optional) Display information only for the specified VN_Port.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring FIP on an FCoE-FC Gateway on page 4589</a></li> <li>• <a href="#">show fibre-channel fip on page 4724</a></li> <li>• <a href="#">show fibre-channel fip fabric on page 4733</a></li> <li>• <a href="#">show fibre-channel fip fcf on page 4736</a></li> <li>• <a href="#">show fibre-channel fip interface on page 4739</a></li> <li>• <a href="#">show fibre-channel fip statistics on page 4742</a></li> <li>• <a href="#">clear fibre-channel fip enode on page 4672</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fibre-channel fip enode on page 4732</a> <a href="#">show fibre-channel fip enode detail on page 4732</a>
<b>Output Fields</b>	Table 332 on page 4729 lists the output fields for the <b>show fibre-channel fip enode</b> command. Output fields are listed in the approximate order in which they appear. A session is a FLOGI or FDISC login to the FC SAN fabric. Session does not refer to end-to-end storage sessions.

**Table 332: show fibre-channel fip enode Output Fields**

Field Name	Field Description	Level of Output
<b>Fabric Name</b>	Name of the fabric and in parentheses the fabric ID.	All
<b>FC-MAP</b>	FCoE mapped address prefix of the FCoE forwarder for the fabric.	<b>detail</b>
<b>FKA-ADV-PERIOD</b>	Period of time in milliseconds between FIP keepalive advertisements configured for the FC fabric.	<b>detail</b>



Table 332: show fibre-channel fip enode Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>MAX-SESSIONS-PER-ENODE</b>	Maximum number of concurrent sessions (FLOGI and FDISC combined) that each ENode can instantiate.	<b>detail</b>
<b>FCoE trusted</b>	Whether ports on the FC fabric are trusted or untrusted: <ul style="list-style-type: none"> <li><b>Yes</b>—Ports on the FC fabric are trusted; FIP snooping is turned off.</li> <li><b>No</b>—Ports on the FC fabric are not trusted; FIP snooping is turned on.</li> </ul>	<b>detail</b>
<b>Member</b>	Information about an FCF that is a member of the fabric.	All
• <b>FCF-MAC</b>	MAC address used in discovery advertisements.	All
• <b>FKA-ADV-PERIOD</b>	Period of time in milliseconds between FIP keepalive advertisements configured for the FC interface.	<b>detail</b>
• <b>FKA-ADV-D-BIT</b>	Disable FIP keepalive advertisement monitoring bit. The state is always <b>off</b> .	<b>detail</b>
• <b>Type</b>	Type of interface: <ul style="list-style-type: none"> <li><b>VF_Port Capable</b>—Interface can act as a VF_Port interface.</li> </ul>	<b>detail</b>
• <b>Priority</b>	Priority value associated with the switch FCF-MAC. Converged network adapters (CNAs) use the priority value to determine the switch with which they will perform FIP FLOGI. The lower the value, the higher the priority.  Value range: 0 through 255.	<b>detail</b>
• <b>State</b>	FIP state on the fabric: <ul style="list-style-type: none"> <li><b>Enable</b>—FIP is enabled on the fabric.</li> <li><b>Disable</b>—FIP is disabled on the fabric.</li> </ul>	<b>detail</b>



Table 332: show fibre-channel fip enode Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>ENode</b>	Information about a connected FCoE node (ENode).	All
• <b>ENode-MAC</b>	MAC address of the connected ENode.	All
• <b>ENode State</b>	Login state internal to Junos OS.	All
• <b>Configured ENode timer</b>	User-configured FIP keepalive advertisement interval in milliseconds.	<b>detail</b>
• <b>Running ENode timer</b>	Runtime interval in milliseconds of the last FIP keepalive advertisement received. This value changes every time an FKA_ADV is received.	<b>detail</b>
• <b>Active FIP Sessions</b>	Number of active FIP sessions on the ENode.	<b>detail</b>
• <b>VN-Port-MAC</b>	MAC address of a VN_Port on the ENode.	<b>detail</b>
• <b>Session State</b>	Session state internal to Junos OS.	<b>detail</b>
• <b>Configured FKA-ADV</b>	User-configured FIP keepalive advertisement interval in milliseconds.	<b>detail</b>
• <b>Running FKA-ADV</b>	Runtime interval in seconds of the last FIP keepalive advertisement received. This value changes every time an FKA_ADV is received.	<b>detail</b>
• <b>Configured VN-Port Timer</b>	Configured state of the VN_Port keepalive timer in seconds. This value is always 90 and is not user-configurable.	<b>detail</b>
• <b>Running VN-Port Timer</b>	Running state of the VN_Port keepalive timer in seconds.	<b>detail</b>
• <b>FCID</b>	Fibre Channel ID of the VN_Port.	<b>detail</b>
• <b>WWN</b>	Unique worldwide name of the VN_Port.	<b>detail</b>



## Sample Output

```
show fibre-channel fip enode      user@switch> show fibre-channel fip enode 00:10:94:00:00:02
enode                             Fabric Name : proxy2 (200)
                                  Member
                                  FCF-MAC : 00:30:48:b0:ee:d2 (Interface vlan.100)
                                  Enode
                                  Enode-MAC : 00:10:94:00:00:02      State : Logged-in
                                  Session
                                  VN-Port-MAC      : 0e:fc:00:03:00:02
                                  VN-Port-MAC      : 0e:fc:00:03:00:01

show fibre-channel fip enode detail user@switch> show fibre-channel fip enode 00:10:94:00:00:02 detail
enode detail                      Fabric Name : proxy2 (200)
                                  FC-MAP      : 0e:fc:00
                                  FKA-ADV-PERIOD : 90000      MAX-SESSIONS-PER-ENODE : 32
                                  FCoE trusted  : No

                                  Member
                                  FCF-MAC: 00:30:48:b0:ee:d2 (Interface vlan.100)
                                  FKA-ADV-PERIOD : 90000      FKA-ADV-D-BIT-bit : Off
                                  Type : VF_Port Capable
                                  Priority : 86      State : Enable

                                  ENode
                                  Enode-MAC : 00:10:94:00:00:02      ENode State : Logged-in
                                  Configured ENode timer: 8000      Running ENode timer: 12226
                                  Active FIP Sessions : 2

                                  Session details
                                  VN-Port-MAC      : 0e:fc:00:03:00:02
                                  Session state      : Up
                                  Configured FKA-ADV : 90000
                                  Running FKA-ADV     : 0
                                  Configured VN-Port Timer : 90000
                                  Running VN-Port Timer  : 213193
                                  FCID              : 0x2c1a01
                                  WWN              : 10:00:00:00:c9:a4:a3:cf

                                  VN-Port-MAC      : 0e:fc:00:03:00:01
                                  Session state      : Up
                                  Configured FKA-ADV : 90000
                                  Running FKA-ADV     : 0
                                  Configured VN-Port Timer : 90000
                                  Running VN-Port Timer  : 213632
                                  FCID              : 0x2c1a02
                                  WWN              : 10:00:00:00:d9:b4:e3:df
```



## show fibre-channel fip fabric

<b>Syntax</b>	<b>show fibre-channel fip fabric <i>fabric-name</i></b> <b>&lt;brief   detail&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Fibre Channel over Ethernet (FCoE) Initialization Protocol (FIP) information for a specified Fibre Channel fabric.
<b>Options</b>	<b>brief   detail</b> —(Optional) Display the specified level of output.  <b><i>fabric-name</i></b> —Display information for the specified fabric.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring FIP on an FCoE-FC Gateway on page 4589</a></li> <li>• <a href="#">show fibre-channel fip on page 4724</a></li> <li>• <a href="#">show fibre-channel fip enode on page 4729</a></li> <li>• <a href="#">show fibre-channel fip fcf on page 4736</a></li> <li>• <a href="#">show fibre-channel fip interface on page 4739</a></li> <li>• <a href="#">show fibre-channel fip statistics on page 4742</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fibre-channel fip fabric proxy2 on page 4735</a> <a href="#">show fibre-channel fip fabric detail on page 4735</a>
<b>Output Fields</b>	Table 333 on page 4733 lists the output fields for the <b>show fibre-channel fip fabric</b> command. Output fields are listed in the approximate order in which they appear.

**Table 333: show fibre-channel fip fabric Output Fields**

Field Name	Field Description	Level of Output
<b>Fabric Name</b>	Name of the fabric and in parentheses the fabric ID.	All
<b>FC-MAP</b>	FCoE mapped address prefix of the FCoE forwarder for the fabric.	<b>detail</b>
<b>FKA-ADV-PERIOD</b>	Period of time in milliseconds between FIP keepalive advertisements configured for the FC fabric.	<b>detail</b>



Table 333: show fibre-channel fip fabric Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Member</b>	Information about an FCF that is a member of the fabric.	All
• FCF-MAC	MAC address used in discovery advertisements.	All
• FKA-ADV-PERIOD	Period of time in milliseconds between FIP keepalive advertisements configured for the FC interface.	<b>detail</b>
• FKA-ADV-D-BIT	Disable FIP keepalive advertisement monitoring bit. The state is always <b>off</b> .	<b>detail</b>
• Type	Type of interface:  • <b>VF_Port Capable</b> —Interface can act as a VF_Port interface.	<b>detail</b>
<b>ENode</b>	Information about a connected FCoE node (ENode).	All
• ENode-MAC	MAC address of the connected ENode.	All
• State	Login state internal to Junos OS.	All
• VN-Port-MAC	MAC address of a VN_Port on the ENode.	<b>detail</b>
• Session State	Session state internal to Junos OS.	<b>detail</b>
• Configured FKA-ADV	User-configured FIP keepalive advertisement interval in milliseconds.	<b>detail</b>
• Running FKA-ADV	Runtime interval in seconds of the last FIP keepalive advertisement received. This value changes every time an FKA_ADV is received.	<b>detail</b>
• Configured VN-Port Timer	Configured state of the VN_Port keepalive timer in seconds. This value is always 90 and is not user-configurable.	<b>detail</b>
• Running VN-Port Timer	Running state of the VN_Port keepalive timer in seconds.	<b>detail</b>



## Sample Output

```

show fibre-channel fip fabric proxy2
user@switch> show fibre-channel fip fabric proxy2
Fabric Name : proxy2 (200)
Member
FCF-MAC : 00:30:48:b0:ee:d2 (Interface vlan.100)
ENode
ENode-MAC : 00:10:94:00:00:02      State : Logged-in
ENode-MAC : 00:10:94:00:00:03      State : Logged-in

```

```

show fibre-channel fip fabric detail
user@switch> show fibre-channel fip fabric proxy2 detail
Fabric Name : proxy2 (200)
FC-MAP      : 0e:fc:00
FKA-ADV-PERIOD : 90000

Member
FCF-MAC: 00:30:48:b0:ee:d2 (Interface vlan.100)
FKA-ADV-PERIOD : 90000      FKA-ADV-D-bit : Off
Type : VF_Port Capable

ENode
ENode-MAC : 00:10:94:00:00:02      State : Logged-in

Session details
VN-Port-MAC      : 0e:fc:00:03:00:02
Session state    : Up
Configured FKA-ADV : 90000
Running FKA-ADV   : 0
Configured VN-Port Timer : 90
Running VN-Port Timer : 0

VN-Port-MAC      : 0e:fc:00:03:00:01
Session state    : Up
Configured FKA-ADV : 90000
Running FKA-ADV   : 0
Configured VN-Port Timer : 90
Running VN-Port Timer : 0

ENode
ENode-MAC : 00:10:94:00:00:03      State : Logged-in

Session details
VN-Port-MAC      : 0e:fc:00:03:00:04
Session state    : Up
Configured FKA-ADV : 90000
Running FKA-ADV   : 0
Configured VN-Port Timer : 90
Running VN-Port Timer : 0

VN-Port-MAC      : 0e:fc:00:03:00:03
Session state    : Up
Configured FKA-ADV : 90000
Running FKA-ADV   : 0
Configured VN-Port Timer : 90
Running VN-Port Timer : 0

```



## show fibre-channel fip fcf

<b>Syntax</b>	<b>show fibre-channel fip fcf <i>fcf-mac</i></b> <b>&lt;brief   detail&gt;</b> <b>&lt;fabric <i>fabric-name</i>&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Fibre Channel over Ethernet (FCoE) Initialization Protocol (FIP) information for a specified FCoE forwarder (FCF).
<b>Options</b>	<b>brief   detail</b> —(Optional) Display the specified level of output.  <b>fabric <i>fabric-name</i></b> —(Optional) Display FCF information only for the specified fabric.  <b><i>fcf-mac</i></b> —Display information for the FCF specified by the MAC address.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring FIP on an FCoE-FC Gateway on page 4589</a></li> <li>• <a href="#">show fibre-channel fip on page 4724</a></li> <li>• <a href="#">show fibre-channel fip enode on page 4729</a></li> <li>• <a href="#">show fibre-channel fip fabric on page 4733</a></li> <li>• <a href="#">show fibre-channel fip interface on page 4739</a></li> <li>• <a href="#">show fibre-channel fip statistics on page 4742</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fibre-channel fip fcf on page 4738</a> <a href="#">show fibre-channel fip fcf detail on page 4738</a>
<b>Output Fields</b>	<a href="#">Table 334 on page 4736</a> lists the output fields for the <b>show fibre-channel fip fcf</b> command. Output fields are listed in the approximate order in which they appear.

**Table 334: show fibre-channel fip fcf Output Fields**

Field Name	Field Description	Level of Output
<b>Fabric Name</b>	Name of the fabric and in parentheses the fabric ID.	All
<b>FC-MAP</b>	FCoE mapped address prefix of the FCoE forwarder for the fabric.	<b>detail</b>
<b>FKA-ADV-PERIOD</b>	Period of time in milliseconds between FIP keepalive advertisements configured for the FC fabric.	<b>detail</b>



Table 334: show fibre-channel fip fcf Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Member</b>	Information about an FCF that is a member of the fabric.	All
• FCF-MAC	MAC address used in discovery advertisements.	All
• FKA-ADV-PERIOD	Period of time in milliseconds between FIP keepalive advertisements configured for the FC interface.	<b>detail</b>
• FKA-ADV-D-BIT	Disable FIP keepalive advertisement monitoring bit. The state is always <b>off</b> .	<b>detail</b>
• Type	Type of interface:  • <b>VF_Port Capable</b> —Interface can act as a VF_Port interface.	<b>detail</b>
<b>ENode</b>	Information about a connected FCoE node (ENode).	All
• ENode-MAC	MAC address of the connected ENode.	All
• State	Login state internal to Junos OS.	All
• VN-Port-MAC	MAC address of a VN_Port on the ENode.	<b>detail</b>
• Session State	Session state internal to Junos OS.	<b>detail</b>
• Configured FKA-ADV	User-configured FIP keepalive advertisement interval in milliseconds.	<b>detail</b>
• Running FKA-ADV	Runtime interval in seconds of the last FIP keepalive advertisement received. This value changes every time an FKA_ADV is received.	<b>detail</b>
• Configured VN-Port Timer	Configured state of the VN_Port keepalive timer in seconds. This value is always 90 and is not user-configurable.	<b>detail</b>
• Running VN-Port Timer	Running state of the VN_Port keepalive timer in seconds.	<b>detail</b>



## Sample Output

```
show fibre-channel fip      user@switch> show fibre-channel fip fcf 00:30:48:b0:ee:d2
fcf                          Fabric Name : proxy2 (200)
                             Member
                             FCF-MAC : 00:30:48:b0:ee:d2 (Interface vlan.100)
                             ENode
                             ENode-MAC : 00:10:94:00:00:02      State : Logged-in
                             ENode-MAC : 00:10:94:00:00:03      State : Logged-in
```

```
show fibre-channel fip      user@switch> show fibre-channel fip fcf 00:30:48:b0:ee:d2 detail
fcf detail                  Fabric Name : proxy2 (200)
                             FC-MAP      : 0e:fc:00
                             FKA-ADV-PERIOD : 90000

                             Member
                             FCF-MAC: 00:30:48:b0:ee:d2 (Interface vlan.100)
                             FKA-ADV-PERIOD : 90000      FKA-ADV-D-bit : Off
                             Type : VF_Port Capable

                             ENode
                             ENode-MAC : 00:10:94:00:00:02      State : Logged-in

                             Session details
                             VN-Port-MAC      : 0e:fc:00:03:00:02
                             Session state     : Up
                             Configured FKA-ADV : 90000
                             Running FKA-ADV    : 0
                             Configured VN-Port Timer : 90
                             Running VN-Port Timer : 0

                             VN-Port-MAC      : 0e:fc:00:03:00:01
                             Session state     : Up
                             Configured FKA-ADV : 90000
                             Running FKA-ADV    : 0
                             Configured VN-Port Timer : 90
                             Running VN-Port Timer : 0

                             ENode
                             ENode-MAC : 00:10:94:00:00:03      State : Logged-in

                             Session details
                             VN-Port-MAC      : 0e:fc:00:03:00:04
                             Session state     : Up
                             Configured FKA-ADV : 90000
                             Running FKA-ADV    : 0
                             Configured VN-Port Timer : 90
                             Running VN-Port Timer : 0

                             VN-Port-MAC      : 0e:fc:00:03:00:03
                             Session state     : Up
                             Configured FKA-ADV : 90000
                             Running FKA-ADV    : 0
                             Configured VN-Port Timer : 90
                             Running VN-Port Timer : 0
```



## show fibre-channel fip interface

<b>Syntax</b>	show fibre-channel fip interface <i>interface-name</i> <brief   detail> <enode <i>enode-mac</i> > <fabric <i>fabric-name</i> > <vn-port <i>vn-port-mac</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Fibre Channel over Ethernet (FCoE) Initialization Protocol (FIP) information for a specified interface.
<b>Options</b>	<p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>enode <i>enode-mac</i></b>—MAC address of the ENode.</p> <p><b>fabric <i>fabric-name</i></b>—(Optional) Display interface information only for the specified fabric.</p> <p><b>interface-name</b>—Display information for the specified interface.</p> <p><b>vn-port-mac</b>—MAC address of the VN_Port.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring FIP on an FCoE-FC Gateway on page 4589</a></li> <li>• <a href="#">show fibre-channel fip on page 4724</a></li> <li>• <a href="#">show fibre-channel fip enode on page 4729</a></li> <li>• <a href="#">show fibre-channel fip fabric on page 4733</a></li> <li>• <a href="#">show fibre-channel fip fcf on page 4736</a></li> <li>• <a href="#">show fibre-channel fip statistics on page 4742</a></li> <li>• <a href="#">clear fibre-channel fip vn-port on page 4674</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fibre-channel fip interface on page 4741</a> <a href="#">show fibre-channel fip interface detail on page 4741</a>
<b>Output Fields</b>	<a href="#">Table 335 on page 4739</a> lists the output fields for the <b>show fibre-channel fip interface</b> command. Output fields are listed in the approximate order in which they appear.

**Table 335: show fibre-channel fip interface Output Fields**

Field Name	Field Description	Level of Output
Fabric Name	Name of the fabric and in parentheses the fabric ID.	All
FC-MAP	FCoE mapped address prefix of the FCoE forwarder for the fabric.	<b>detail</b>



Table 335: show fibre-channel fip interface Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>FKA-ADV-PERIOD</b>	Period of time in milliseconds between FIP keepalive advertisements configured for the FC fabric.	<b>detail</b>
<b>Member</b>	Information about an FCF that is a member of the fabric.	All
<ul style="list-style-type: none"> <li><b>FCF-MAC</b></li> </ul>	MAC address used in discovery advertisements.	All
<ul style="list-style-type: none"> <li><b>FKA-ADV-PERIOD</b></li> </ul>	Period of time in milliseconds between FIP keepalive advertisements configured for the FC interface.	<b>detail</b>
<ul style="list-style-type: none"> <li><b>FKA-ADV-D-BIT</b></li> </ul>	Disable FIP keepalive advertisement monitoring bit. The state is always <b>off</b> .	<b>detail</b>
<ul style="list-style-type: none"> <li><b>Type</b></li> </ul>	Type of interface: <ul style="list-style-type: none"> <li><b>VF_Port Capable</b>—Interface can act as a VF_Port interface.</li> </ul>	<b>detail</b>
<b>ENode</b>	Information about a connected FCoE node (ENode).	All
<ul style="list-style-type: none"> <li><b>ENode-MAC</b></li> </ul>	MAC address of the connected ENode.	All
<ul style="list-style-type: none"> <li><b>State</b></li> </ul>	Login state internal to Junos OS.	All
<ul style="list-style-type: none"> <li><b>VN-Port-MAC</b></li> </ul>	MAC address of a VN_Port on the ENode.	<b>detail</b>
<ul style="list-style-type: none"> <li><b>Session State</b></li> </ul>	Session state internal to Junos OS.	<b>detail</b>
<ul style="list-style-type: none"> <li><b>Configured FKA-ADV</b></li> </ul>	User-configured FIP keepalive advertisement interval in milliseconds.	<b>detail</b>
<ul style="list-style-type: none"> <li><b>Running FKA-ADV</b></li> </ul>	Runtime interval in seconds of the last FIP keepalive advertisement received. This value changes every time an FKA_ADV is received.	<b>detail</b>
<ul style="list-style-type: none"> <li><b>Configured VN-Port Timer</b></li> </ul>	Configured state of the VN_Port keepalive timer in seconds. This value is always 90 and is not user-configurable.	<b>detail</b>
<ul style="list-style-type: none"> <li><b>Running VN-Port Timer</b></li> </ul>	Running state of the VN_Port keepalive timer in seconds.	<b>detail</b>



## Sample Output

```
show fibre-channel fip interface user@switch> show fibre-channel fip interface vlan.100
Fabric Name : proxy2 (200)
Member
FCF-MAC : 00:30:48:b0:ee:d2 (Interface vlan.100)
ENode
ENode-MAC : 00:10:94:00:00:02      State : Logged-in
ENode-MAC : 00:10:94:00:00:03      State : Logged-in
```

```
show fibre-channel fip interface detail user@switch> show fibre-channel fip interface vlan.100 detail
Fabric Name : proxy2 (200)
FC-MAP      : 0e:fc:00
FKA-ADV-PERIOD : 90000

Member
FCF-MAC: 00:30:48:b0:ee:d2 (Interface vlan.100)
FKA-ADV-PERIOD : 90000      FKA-ADV-D-bit : Off
Type : VF_Port Capable

ENode
ENode-MAC : 00:10:94:00:00:02      State : Logged-in

Session details
VN-Port-MAC      : 0e:fc:00:03:00:02
Session state    : Up
Configured FKA-ADV : 90000
Running FKA-ADV   : 0
Configured VN-Port Timer : 90
Running VN-Port Timer : 0

VN-Port-MAC      : 0e:fc:00:03:00:01
Session state    : Up
Configured FKA-ADV : 90000
Running FKA-ADV   : 0
Configured VN-Port Timer : 90
Running VN-Port Timer : 0

ENode
ENode-MAC : 00:10:94:00:00:03      State : Logged-in

Session details
VN-Port-MAC      : 0e:fc:00:03:00:04
Session state    : Up
Configured FKA-ADV : 90000
Running FKA-ADV   : 0
Configured VN-Port Timer : 90
Running VN-Port Timer : 0

VN-Port-MAC      : 0e:fc:00:03:00:03
Session state    : Up
Configured FKA-ADV : 90000
Running FKA-ADV   : 0
Configured VN-Port Timer : 90
Running VN-Port Timer : 0
```



## show fibre-channel fip statistics

<b>Syntax</b>	<b>show fibre-channel fip statistics</b> <b>&lt;fabric <i>fabric-name</i>&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Fibre Channel over Ethernet Initialization Protocol (FIP) statistics.
<b>Options</b>	<b>fabric <i>fabric-name</i></b> —(Optional) Display output only for the specified fabric.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fibre-channel fip on page 4724</a></li> <li>• <a href="#">show fibre-channel fip enode on page 4729</a></li> <li>• <a href="#">show fibre-channel fip fabric on page 4733</a></li> <li>• <a href="#">show fibre-channel fip fcf on page 4736</a></li> <li>• <a href="#">show fibre-channel fip interface on page 4739</a></li> <li>• <a href="#">clear fibre-channel fip statistics on page 4673</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fibre-channel fip statistics on page 4745</a>
<b>Output Fields</b>	<a href="#">Table 336 on page 4742</a> lists the output fields for the <b>show fibre-channel fip statistics</b> command. Output fields are listed in the approximate order in which they appear.

**Table 336: show fibre-channel fip statistics Output Fields**

Field Name	Field Description
<b>Fabric name</b>	Name of the fabric.
<b>Interface name</b>	Name of the FCoE VLAN interface.



Table 336: show fibre-channel fip statistics Output Fields (*continued*)

Field Name	Field Description
<b>FIP Message Type</b>	Type of FIP message for the displayed row of statistics..
• MDS	Number of multicast discovery solicitations.
• UDS	Number of unicast discovery solicitations.
• FLOGI	Number of fabric login (FLOGI) messages.
• FDISC	Number of fabric discovery (FDISC) messages.
• LOGO	Number of fabric logout (LOGO) messages.
• ENODE KA	Number of ENode keepalive messages.
• VN_Port KA	Number of VN_Port keepalive messages.
• MDA	Number of multicast discovery advertisements.
• UDA	Number of unicast discovery advertisements.
• FLOGI ACC	Number of fabric login requests accepted.
• FLOGI RJT	Number of fabric login requests rejected.
• FDISC ACC	Number of fabric discovery requests accepted.
• FDISC RJT	Number of fabric discovery requests rejected.
• LOGO ACC	Number of logout requests accepted.
• LOGO RJT	Number of logout requests rejected.
• CVL	Number of clear virtual links (CVL) messages.
• CVL ALL	Number of CVL all messages.
<b>Received</b>	Number of messages received.
<b>Sent</b>	Number of messages sent.
<b>Rx errors</b>	Number of receive errors.



Table 336: show fibre-channel fip statistics Output Fields (*continued*)

Field Name		Field Description
<b>Dropped</b>		<p>Number of dropped messages.</p> <p><b>NOTE:</b> One cause of dropped messages is that the system limits the number of discovery solicitations (MDS and UDS) it accepts to a maximum of 100 outstanding requests at any given time. If the system has 100 discovery solicitations outstanding, the system does not respond to new discovery solicitations. Instead, the system drops new discovery solicitations and reports the number of dropped discovery solicitations in this field. When there are fewer than 100 outstanding discovery solicitations, the system responds to new requests as usual with a discovery advertisement.</p>
<b>General Statistics</b>	<b>Number of frames recvd with invalid src-mac</b>	Number of frames received that have an invalid source media access control (MAC) address.
	<b>Number of frames recvd with invalid version</b>	Number of FIP frames received with an Invalid FIP version.
	<b>Number of frames recvd with invalid opcode</b>	Number of FIP validation descriptors with an invalid opcode received.
	<b>Number of frames recvd with invalid subcode</b>	Number of FIP validation descriptors with an invalid subcode received.
	<b>Number of frames recvd on inactive FCF</b>	Number of frames received on a logical interface if FIP is not active on that logical interface (for example, if a WWN is not allocated to that logical interface).



## Sample Output

```

user@switch> show fibre-channel fip statistics
Fabric name: proxy2

Interface name: vlan.100
FIP Message type    Received    Sent    Rx errors    Dropped
MDS                  22236      0        0           17089
UDS                   0          0        0            0
FLOGI                1257       0        8            0
FDISC                0          0        0            0
LOGO                 0          0        0            0
ENODE KA             455        0        6            0
VN_Port KA           22         0        0            0
MDA                  0          243      0            0
UDA                  0          5147     0            0
FLOGI ACC            0          376      0            0
FLOGI RJT            0          881      0            0
FDISC ACC            0          0        0            0
FDISC RJT            0          0        0            0
LOGO ACC             0          0        0            0
LOGO RJT             0          0        0            0
CVL                  0          374      0            0
CVL ALL              0          380      0            0

General Statistics:

Number of frame recvd with invalid src-mac:      0
Number of frame recvd with invalid version:      0
Number of frame recvd with invalid opcode:       0
Number of frame recvd with invalid subcode:      0
Number of frame recvd on inactive FCF:           0

```



## show fibre-channel flogi fport

<b>Syntax</b>	<b>show fibre-channel flogi fport</b> <b>&lt;fabric <i>fabric-name</i>&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Fibre Channel fabric login (FLOGI) F_Port information.
<b>Options</b>	<b>fabric <i>fabric-name</i></b> —(Optional) Display output only for the specified fabric.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fibre-channel flogi nport on page 4747</a></li> <li>• <a href="#">show fibre-channel flogi statistics on page 4749</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fibre-channel flogi fport on page 4746</a>
<b>Output Fields</b>	Table 337 on page 4746 lists the output fields for the <b>show fibre-channel flogi fport</b> command. Output fields are listed in the approximate order in which they appear.

**Table 337: show fibre-channel flogi fport Output Fields**

Field Name	Field Description
<b>Fabric</b>	Name of the fabric.
<b>Interface</b>	Name of the switch VF_Port interface.
<b>Mac-Address</b>	Media access control (MAC) address of the ENode.
<b>State</b>	Interface physical state: <b>up</b> or <b>down</b> .
<b>Logins</b>	Number of logins to the VF_Port.
<b>NPIV</b>	N_Port ID virtualization (NPIV) state: <b>Yes</b> or <b>No</b> .
<b>FLOGI-Port-WWN</b>	Unique worldwide name (WWN) of the VN_Port performing fabric login (FLOGI) to the switch VF_Port.

## Sample Output

### show fibre-channel flogi fport

```

user@switch> show fibre-channel flogi fport
Fabric: proxy2
Interface  Mac-Address      State  Logins  NPIV  FLOGI-Port-WWN
vlan.100   00:10:94:00:00:02    Up     2       Yes   20:00:10:94:00:01:00:01
vlan.100   00:10:94:00:00:03    Up     2       Yes   20:00:10:94:00:02:00:01

```



## show fibre-channel flogi nport

<b>Syntax</b>	<b>show fibre-channel flogi nport</b> <brief   detail> <fabric <i>fabric-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Fibre Channel fabric login (FLOGI) VN_Port information.
<b>Options</b>	<b>brief   detail</b> —(Optional) Display the specified level of output.  <b>fabric <i>fabric-name</i></b> —(Optional) Display output only for the specified fabric.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fibre-channel flogi fport on page 4746</a></li> <li>• <a href="#">show fibre-channel flogi statistics on page 4749</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fibre-channel flogi nport on page 4748</a> <a href="#">show fibre-channel flogi nport detail on page 4748</a>
<b>Output Fields</b>	Table 338 on page 4747 lists the output fields for the <b>show fibre-channel flogi nport</b> command. Output fields are listed in the approximate order in which they appear.

**Table 338: show fibre-channel flogi nport Output Fields**

Field Name	Field Description	Level of Output
<b>Fabric</b>	Name of the fabric.	All
<b>Virtual-switch</b>	Name of the fabric.	<b>detail</b>
<b>Interface</b>	Name of the VF_Port interface.	All
<b>FCID</b>	VN_Port Fibre Channel identifier provided by the Fibre Channel over Ethernet Forwarder (FCoE forwarder) or the Fibre Channel switch.	All
<b>Port-WWN</b>	Unique worldwide name (WWN) of the VN_Port.	All
<b>Node-WWN</b>	Unique WWN of the node hosting the VN_Port.	All
<b>State or Flogi-state</b>	Login state internal to Junos OS.	All
<b>FLOGI-Port-WWN</b>	Unique worldwide name (WWN) of the VN_Port performing fabric login (FLOGI) to the switch VF_Port.	<b>detail</b>



## Sample Output

**show fibre-channel  
flogi nport**

```
user@switch> show fibre-channel flogi nport
Fabric: proxy2
Interface    FCID      Port-WWN      Node-WWN      State
vlan.100     0x030001  20:00:10:94:00:01:00:01  10:00:10:94:00:00:00:01  online
vlan.100     0x030002  20:00:10:94:00:01:00:05  10:00:10:94:00:00:00:01  online
vlan.100     0x030003  20:00:10:94:00:02:00:01  10:00:10:94:00:00:00:02  online
vlan.100     0x030004  20:00:10:94:00:02:00:05  10:00:10:94:00:00:00:02  online
```

**show fibre-channel  
flogi nport detail**

```
user@switch> show fibre-channel flogi nport detail
Fabric: proxy2
Virtual-switch: proxy2

Interface: vlan.100
Flogi-state: online
FCID: 0x030001
Port-WWN: 20:00:10:94:00:01:00:01
Node-WWN: 10:00:10:94:00:00:00:01
FLOGI-Port-WWN: 20:00:10:94:00:01:00:01

Interface: vlan.100
Flogi-state: online
FCID: 0x030002
Port-WWN: 20:00:10:94:00:01:00:05
Node-WWN: 10:00:10:94:00:00:00:01
FLOGI-Port-WWN: 20:00:10:94:00:01:00:01

Interface: vlan.100
Flogi-state: online
FCID: 0x030003
Port-WWN: 20:00:10:94:00:02:00:01
Node-WWN: 10:00:10:94:00:00:00:02
FLOGI-Port-WWN: 20:00:10:94:00:02:00:01

Interface: vlan.100
Flogi-state: online
FCID: 0x030004
Port-WWN: 20:00:10:94:00:02:00:05
Node-WWN: 10:00:10:94:00:00:00:02
FLOGI-Port-WWN: 20:00:10:94:00:02:00:01
```



## show fibre-channel flogi statistics

<b>Syntax</b>	<b>show fibre-channel flogi statistics</b> <b>&lt;fabric <i>fabric-name</i>&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Fibre Channel fabric login (FLOGI) statistics.
<b>Options</b>	<b>fabric <i>fabric-name</i></b> —(Optional) Display output only for the specified fabric.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fibre-channel flogi fport on page 4746</a></li> <li>• <a href="#">show fibre-channel flogi nport on page 4747</a></li> <li>• <a href="#">clear fibre-channel flogi statistics on page 4675</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fibre-channel flogi statistics on page 4750</a>
<b>Output Fields</b>	<a href="#">Table 339 on page 4749</a> lists the output fields for the <b>show fibre-channel flogi statistics</b> command. Output fields are listed in the approximate order in which they appear.

**Table 339: show fibre-channel flogi statistics Output Fields**

Field Name	Field Description
<b>Fabric</b>	Name of the fabric.
<b>FLOGI-Server Message type</b>	Type of message: <ul style="list-style-type: none"> <li>• <b>FLOGI</b>—Fabric login (FLOGI) messages.</li> <li>• <b>FDISC</b>—Fabric discovery (FDISC) messages.</li> <li>• <b>FLOGO</b>—Fabric logout messages.</li> <li>• <b>FLOGO-LS-ACC</b>—Fabric logout link service accept messages.</li> <li>• <b>LS-Accept</b>—Link service accept messages.</li> <li>• <b>LS-Reject</b>—Link service reject messages.</li> <li>• <b>invalid</b>—Invalid messages.</li> </ul>
<b>Received</b>	Number of messages received for a given message type.
<b>Sent</b>	Number of messages sent for a given message type.
<b>Fabric</b>	Name of the fabric.
<b>Rx errors</b>	Number of receive errors for a given type of message.



Table 339: show fibre-channel flogi statistics Output Fields (*continued*)

Field Name	Field Description
<b>General Statistics</b>	
• <b>Number of FC2 Header Parse Errors</b>	Number of errors parsing the FC-2 header.
• <b>Number of FLOGI Parse Errors</b>	Number of errors parsing fabric login requests.
• <b>Number of FDISC Parse Errors</b>	Number of errors parsing fabric discovery requests.
• <b>Number of FLOGO Parse Errors</b>	Number of errors parsing fabric logout requests.
• <b>Number of Logins Discarded as Domain-ID not available</b>	Number of discarded logins due to unavailability of a domain ID.
• <b>Number of Logins Discarded as FCID not available</b>	Number of discarded logins due to the unavailability of a Fibre Channel ID.
• <b>Number of FCID requests deferred</b>	Number of deferred FCID requests.
• <b>Number of deferred FCID requests failed</b>	Number of deferred FCID requests that failed.

## Sample Output

### show fibre-channel flogi statistics

```

user@switch> show fibre-channel flogi statistics
Fabric: proxy2

FLOGI-Server Message type   Received      Sent    Rx errors
FLOGI                       2             0        0
FDISC                       2             0        0
FLOGO                       0             0        0
FLOGO-LS-ACC                0             0        0
LS-Accept                   0             4        0
LS-Reject                   0             0        0
invalid                     0             0        0

General Statistics:

Number of FC2 Header Parse Errors:           0
Number of FLOGI Parse Errors:                 0
Number of FDISC Parse Errors:                 0
Number of FLOGO Parse Errors:                 0
Number of Logins Discarded as Domain-ID not available: 0
Number of Logins Discarded as FCID not available: 0
Number of FCID requests deferred:             0
Number of deferred FCID requests failed:      0

```



## show fibre-channel interfaces

<b>Syntax</b>	<b>&lt;brief   detail&gt;</b> <b>&lt;fabric <i>fabric-name</i>&gt;</b> <b>show fibre-channel interfaces <i>interface-name</i></b>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display information about Fibre Channel (FC) interfaces.
<b>Options</b>	<b>brief   detail</b> —(Optional) Display the specified level of output. <b>fabric <i>fabric-name</i></b> —(Optional) Display output only for the specified fabric. <b><i>interface-name</i></b> —Display output for the specified interface.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Setting Up Fibre Channel and FCoE VLAN Interfaces in an FCoE-FC Gateway Fabric on page 4495</a></li> <li>• <a href="#">Configuring a Physical Fibre Channel Interface on page 4578</a></li> <li>• <a href="#">Configuring an FCoE VLAN Interface on page 4582</a></li> <li>• <a href="#">Configuring a Fibre Channel Interface on page 4579</a></li> <li>• <a href="#">Assigning Interfaces to a Fibre Channel Fabric on page 4584</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fibre-channel interfaces on page 4753</a> <a href="#">show fibre-channel interfaces detail on page 4753</a>
<b>Output Fields</b>	<a href="#">Table 340 on page 4751</a> lists the output fields for the <b>show fibre-channel interfaces</b> command. Output fields are listed in the approximate order in which they appear.

**Table 340: show fibre-channel interfaces Output Fields**

Field Name	Field Description	Level of Output
<b>Interface</b>	Name of the FC interface.	All
<b>Idx or Index</b>	Interface index internal to Junos OS.	All
<b>Type</b>	Type of interface: <ul style="list-style-type: none"> <li>• <b>FC</b>—Native FC interface</li> <li>• <b>FCOE</b>—Fibre Channel over Ethernet interface</li> </ul>	All
<b>Native Fabric-id</b>	Identification number of the QFX Series fabric.	All
<b>NPIV</b>	N_Port ID virtualization (NPIV) state: <b>Yes</b> or <b>No</b> .	All



Table 340: show fibre-channel interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Config-Mode</b>	User-configured port mode: <ul style="list-style-type: none"> <li><b>F</b>—The port is configured as a VF_Port, an FCoE port connected to FCoE devices.</li> <li><b>NP</b>—The port is configured as a proxy N_Port (NP_Port), a native FC port connected to an FC switch.</li> </ul>	All
<b>Oper-Mode</b>	Operational port mode: <ul style="list-style-type: none"> <li><b>F</b>—The port is operating as a VF_Port, an FCoE port connected to FCoE devices.</li> <li><b>NP</b>—The port is operating as an NP_Port, a native FC port connected to an FC switch or an FCoE forwarder (FCF).</li> </ul>	All
<b>State</b>	Interface state: <b>up</b> or <b>down</b> .	All
<b>WWN</b>	Unique worldwide name (WWN) of the port.	<b>detail</b>
<b>FSM-State</b>	Finite state machine state, internal to Junos OS.	<b>detail</b>
<b>Class ID</b>	Fibre Channel interface class ID, internal to Junos OS.	<b>detail</b>
<b>BB_SC_N</b>	Buffer-to-buffer state change number.	<b>detail</b>
<b>Tx B2B credits</b>	Number of buffer-to-buffer credits advertised by the neighbor switch that is connected to the FC interface.	<b>detail</b>
<b>Fabric</b>	Name of the fabric.	<b>detail</b>
<b>Remote-MAC</b>	Media access control (MAC) address of the remotely connected FCoE device VN_Port interface.	<b>detail</b>
<b>Tagging</b>	Not used. Value is shown as <b>untagged</b> .	<b>detail</b>
<b>Mode</b>	Logical interface (LIF) mode of operation.	<b>detail</b>
<b>H/W token</b>	Unique identifier for the FCoE VLAN interface, internal to Junos OS.	<b>detail</b>



## Sample Output

### show fibre-channel interfaces

```
user@switch> show fibre-channel interfaces
```

Interface	Idx	Type	Native Fabric-id	NPIV	Config Mode	Oper Mode	State
fc-0/0/1.0	70	FC	200	YES	NP	NP	up
vlan.100	84	FCOE	200	YES	F	F	up

### show fibre-channel interfaces detail

```
user@switch> show fibre-channel interfaces detail
```

Interface: fc-0/0/1.0, Index: 70, Type: FC, Native Fabric-id: 200  
 NPIV: YES, Config-Mode: NP, Oper-Mode: NP, State: up  
 WWN: 10:00:00:15:17:a9:98:64, FSM-State: up, Class ID: 1, BB\_SC\_N: 0  
 Tx B2B credits: 32

Fabric	Remote-MAC	Tagging	Mode	Oper state
proxy2	-	untagged	NP	up

Interface: vlan.100, Index: 84, Type: FCOE, Native Fabric-id: 200  
 NPIV: YES, Config-Mode: F, Oper-Mode: F, State: up  
 WWN: 10:00:00:30:48:b0:ee:d2, FSM-State: up  
 H/W token: 13

Fabric	Remote-MAC	Tagging	Mode	Oper state
proxy2	00:10:94:00:00:02	untagged	VF	up
proxy2	00:10:94:00:00:03	untagged	VF	up



## show fibre-channel next-hops

<b>Syntax</b>	<b>show fibre-channel next-hops</b>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Fibre Channel next-hop route information.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fibre-channel routes on page 4755</a></li> <li>• <a href="#">show route forwarding-table family fibre-channel on page 4792</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fibre-channel next-hops on page 4754</a>
<b>Output Fields</b>	Table 341 on page 4754 lists the output fields for the <b>show fibre-channel next-hops</b> command. Output fields are listed in the approximate order in which they appear.

**Table 341: show fibre-channel next-hops Output Fields**

Field Name	Field Description
Type	Type of next hop internal to Junos OS.
State	State of the NP_Port interface: <ul style="list-style-type: none"> <li>• <b>Active</b>—The interface is online.</li> <li>• <b>Deleted</b>—The interface is deleted.</li> </ul>
Interface	Name of the interface.
Mac-Address	Media access control (MAC) address of the interface.
Index	Next-hop index identifier.
Ref-count	Reference count internal to Junos OS.
Flags	Flags internal to Junos OS.

## Sample Output

### show fibre-channel next-hops

```

user@switch> show fibre-channel next-hops
Type   State  Interface    Mac-Address      Index  Ref-count  Flags
----   -
intf   Active fc-0/0/0.0    00:15:17:a9:98:64  674    1          kernel, self
ucast  Active vlan.100 0e:fc:00:03:00:01  675    1          kernel, self
ucast  Active vlan.100 0e:fc:00:03:00:02  676    1          kernel, self
ucast  Active vlan.100 0e:fc:00:03:00:03  677    1          kernel, self
ucast  Active vlan.100 0e:fc:00:03:00:04  678    1          kernel, self

```



## show fibre-channel routes

<b>Syntax</b>	<b>show fibre-channel routes</b> <b>&lt;fabric <i>fabric-name</i>&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Fibre Channel route information.
<b>Options</b>	<b>fabric <i>fabric-name</i></b> —(Optional) Display output only for the specified fabric.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show fibre-channel next-hops on page 4754</a></li> <li>• <a href="#">show route forwarding-table family fibre-channel on page 4792</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fibre-channel routes on page 4756</a>
<b>Output Fields</b>	<p><a href="#">Table 342 on page 4755</a> lists the output fields for the <b>show fibre-channel routes</b> command. Output fields are listed in the approximate order in which they appear.</p>

**Table 342: show fibre-channel routes Output Fields**

Field Name	Field Description
<b>Fabric</b>	Name of the fabric.
<b>Route-prefix</b>	Route destination.
<b>State</b>	State of the NP_Port interface: <ul style="list-style-type: none"> <li>• <b>Active</b>—The interface is online.</li> <li>• <b>Deleted</b>—The interface is deleted.</li> </ul>
<b>Interface</b>	Name of the interface.
<b>Mac-Address</b>	Media access control (MAC) address of the interface.
<b>Index</b>	Next-hop index identifier.
<b>Flags</b>	Flags internal to Junos OS.



## Sample Output

**show fibre-channel  
routes**

user@switch> **show fibre-channel routes**

Fabric: proxy2

Route-prefix	State	Interface	Mac-Address	Index	Flags
0x030000/24	Active	fc-0/0/0.0	00:15:17:a9:98:64	674	kernel
0x030001/24	Active	vlan.100	0e:fc:00:03:00:01	675	kernel
0x030002/24	Active	vlan.100	0e:fc:00:03:00:02	676	kernel
0x030003/24	Active	vlan.100	0e:fc:00:03:00:03	677	kernel
0x030004/24	Active	vlan.100	0e:fc:00:03:00:04	678	kernel



## show fibre-channel proxy fabric-state

<b>Syntax</b>	<b>show fibre-channel proxy fabric-state</b> <b>&lt;fabric <i>fabric-name</i>&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Display Fibre Channel (FC) proxy fabric state information.
<b>Options</b>	<b>fabric <i>fabric-name</i></b> —(Optional) Display output only for the specified fabric.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Monitoring Fibre Channel Interface Load Balancing on page 4665</a></li> <li>• <a href="#">show fibre-channel proxy login-table on page 4760</a></li> <li>• <a href="#">show fibre-channel proxy np-port on page 4764</a></li> <li>• <a href="#">show fibre-channel proxy statistics on page 4767</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fibre-channel proxy fabric-state on page 4759</a> <a href="#">show fibre-channel proxy fabric-state fabric on page 4759</a>
<b>Output Fields</b>	<a href="#">Table 343 on page 4757</a> lists the output fields for the <b>show fibre-channel proxy fabric-state</b> command. Output fields are listed in the approximate order in which they appear.

**Table 343: show fibre-channel proxy fabric-state Output Fields**

Field Name	Field Description
<b>Fabric</b>	Name of the fabric.
<b>Fabric-id</b>	Fabric ID number.
<b>Proxy load balance algorithm</b>	<p>Load-balancing algorithm used on the FCoE-FC gateway FC fabric:</p> <ul style="list-style-type: none"> <li>• <b>Simple</b>—Load balancing is based on the weighted utilization (load) of the NP_Ports connected to an FC fabric. Each new FLOGI or FDISC is assigned to the least-loaded link. On a link load rebalance, only the sessions that need to be moved to another link are logged out. When those sessions log in again, they are placed on active NP_Port interfaces in a balanced manner.</li> <li>• <b>ENode-based</b>—Load balancing is based on the ENode FLOGI. When an ENode logs in to the fabric, all subsequent FDISC sessions associated with that ENode are placed on the same link as the ENode FLOGI session, regardless of the link load. New ENode FLOGIs are placed on the least-loaded link. On a link load rebalance, all sessions are logged out. When the sessions log in again, they are placed on active NP_Port interfaces in a balanced manner.</li> <li>• <b>FLOGI-based</b>—Load balancing is based on the ENode FLOGI. When an ENode logs in to the fabric, all subsequent FDISC sessions associated with that ENode are placed on the same link as the ENode FLOGI session, regardless of the link load. New ENode FLOGIs are placed on the least-loaded link. On a link load rebalance, only the sessions that need to be moved to another link are logged out. When those sessions log in again, they are placed on active NP_Port interfaces in a balanced manner.</li> </ul>



Table 343: show fibre-channel proxy fabric-state Output Fields (*continued*)

Field Name	Field Description
<b>Fabric WWN verification</b>	<p>Fabric worldwide name (WWN) verification check state on the FCoE-FC gateway fabric:</p> <ul style="list-style-type: none"> <li>• Yes—Fabric WWN verification check is enabled.</li> <li>• No—Fabric WWN verification check is disabled.</li> </ul>
<b>Auto load rebalance enabled</b>	<p>Automated link load rebalancing configuration for the FCoE-FC gateway fabric:</p> <ul style="list-style-type: none"> <li>• No—Automated load balancing is disabled (default state).</li> <li>• Yes—Automated load balancing is enabled.</li> </ul>
<b>Last rebalance start-time</b>	<p>Time that the last link load rebalance began on the FCoE-FC gateway fabric:</p> <ul style="list-style-type: none"> <li>• Never—The link load has never been rebalanced.</li> <li>• Timestamp value—Time the last link load rebalancing started.</li> </ul>
<b>Last rebalance end-time</b>	<p>Time that the last link load rebalance ended on the FCoE-FC gateway fabric:</p> <ul style="list-style-type: none"> <li>• Never—The link load has never been rebalanced.</li> <li>• Timestamp value—Time the last link load rebalancing ended.</li> </ul>
<b>Last rebalance trigger</b>	<p>Event that triggered the last link load rebalance on the FCoE-FC gateway fabric:</p> <ul style="list-style-type: none"> <li>• None—The link load has never been rebalanced.</li> <li>• Config-CLI—Configure (enable) automated load balancing.</li> <li>• Request-CLI—Rebalance requested from the CLI using the <b>request fibre-channel proxy load-rebalance fabric fabric-name</b> operational command.</li> <li>• Preview-CLI—Rebalancing <i>dry run</i> requested from the CLI using the <b>request fibre-channel proxy load-rebalance dry-run fabric fabric-name</b> operational command. Indicates that the switch completed the dry run. A dry run simulates a link load rebalance and displays a list of sessions that might be affected if you request an actual rebalance.</li> <li>• Link-up—New FC link (NP_Port) up on the FCoE-FC gateway fabric, which causes a rebalance to distribute sessions to the new link.</li> <li>• Restore-complete—If the FC process on the switch restarts, the switch attempts to restore the session state that existed before the restart. When automated rebalance is enabled, restore-complete indicates that the sessions have been restored and rebalanced.</li> </ul>
<b>Last rebalance trigger-time</b>	<p>Time that the last link load rebalance was triggered on the FCoE-FC gateway fabric:</p> <ul style="list-style-type: none"> <li>• Never—Link load rebalancing has never been triggered.</li> <li>• Timestamp value—Time the last link load rebalancing was triggered.</li> </ul>



Table 343: show fibre-channel proxy fabric-state Output Fields (*continued*)

Field Name	Field Description
Last rebalance trigger-result	<p>Result of the last trigger event on the FCoE-FC gateway fabric:</p> <ul style="list-style-type: none"> <li>• Never—Link load rebalancing has never been triggered.</li> <li>• Not-configured—Automated rebalancing is not configured on the FCoE-FC gateway fabric.</li> <li>• Not-required—Last rebalance trigger did not require rebalancing the link load (the link load was already balanced across the active NP_Port links).</li> <li>• In-progress—Link load rebalancing is in progress and has not finished yet.</li> <li>• Restore-in-progress—The switch is recovering from an FC process restart and is in the process of restoring the sessions to the active NP_Port links.</li> <li>• Success—Link load rebalancing was successful.</li> <li>• Logged-out-all—All sessions have been logged out.</li> <li>• Preview-complete—The switch has finished simulating a dry run rebalancing request from the CLI (<code>request fibre-channel proxy load-rebalance dry-run fabric fabric-name</code> operational command) and reported the sessions that might be affected if you request an actual link load rebalance.</li> <li>• Fabric-deletion-in-progress—FCoE-FC gateway fabric is in the process of being deleted.</li> </ul> <p><b>NOTE:</b> A trigger event does not necessarily result in a rebalance action. Link load rebalancing only occurs if the NP_Port interface session load is not balanced at the time of the trigger event.</p>

## Sample Output

### show fibre-channel proxy fabric-state

```

user@switch> show fibre-channel proxy fabric-state
Fabric: san_fab1, Fabric-id: 10
Proxy load balance algorithm: Simple, Fabric WWN verification: Yes
Auto load rebalance enabled : No
Last rebalance start-time   : Never
Last rebalance end-time     : Never
Last rebalance trigger      : Link-up
Last rebalance trigger-time  : Mon Sep 10 21:42:30 2012 usec: 814602
Last rebalance trigger-result: Not-configured

Fabric: san_fab2, Fabric-id: 20
Proxy load balance algorithm: ENode based, Fabric WWN verification: Yes
Auto load rebalance enabled : No
Last rebalance start-time   : Never
Last rebalance end-time     : Never
Last rebalance trigger      : Link-up
Last rebalance trigger-time  : Mon Sep 17 17:23:35 2012 usec: 619684
Last rebalance trigger-result: Not-configured

```

### show fibre-channel proxy fabric-state fabric

```

user@switch> show fibre-channel proxy fabric-state fabric fc_fabric_100
Fabric: fc_fabric_100, Fabric-id: 100
Proxy load balance algorithm: FLOGI based, Fabric WWN verification: No
Auto load rebalance enabled : Yes
Last rebalance start-time   : Never
Last rebalance end-time     : Never
Last rebalance trigger      : Config-CLI
Last rebalance trigger-time  : Fri Nov 2 08:56:16 2012 usec: 004487
Last rebalance trigger-result: Not-required

```



## show fibre-channel proxy login-table

<b>Syntax</b>	<pre>show fibre-channel proxy login-table &lt;brief   detail&gt; &lt;fabric <i>fabric-name</i>&gt; &lt;interface <i>interface-name</i>&gt;</pre>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Fibre Channel (FC) proxy fabric login table information.
<b>Options</b>	<p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>fabric <i>fabric-name</i></b>—(Optional) Display output only for the specified fabric.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Display output only for the specified interface.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring an FCoE-FC Gateway Fibre Channel Fabric on page 4576</a></li> <li>• <a href="#">show fibre-channel proxy fabric-state on page 4757</a></li> <li>• <a href="#">show fibre-channel proxy np-port on page 4764</a></li> <li>• <a href="#">show fibre-channel proxy statistics on page 4767</a></li> </ul>
<b>List of Sample Output</b>	<p><a href="#">show fibre-channel proxy login-table on page 4762</a></p> <p><a href="#">show fibre-channel proxy login-table detail on page 4762</a></p>
<b>Output Fields</b>	<a href="#">Table 344 on page 4760</a> lists the output fields for the <b>show fibre-channel proxy login-table</b> command. Output fields are listed in the approximate order in which they appear.

**Table 344: show fibre-channel proxy login-table Output Fields**

Field Name	Field Description	Level of Output
<b>Fabric</b>	Name of the fabric.	All
<b>Fabric-id</b>	Fabric ID number.	All
<b>F-Port</b>	<p>One of the following two values:</p> <ul style="list-style-type: none"> <li>• VF_Port interface connected to the Fibre Channel over Ethernet (FCoE) host, shown as the FCoE VLAN interface.</li> <li>• QFX Series FC port that is logged in to the FC switch, shown by a hyphen (-) to indicate that it is not the FCoE device VN_Port.</li> </ul>	All
<b>FCID</b>	VN_Port Fibre Channel identifier provided by the Fibre Channel over Ethernet (FCoE) forwarder (FCF) or the Fibre Channel switch.	All



Table 344: show fibre-channel proxy login-table Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Port-WWN</b>	Unique worldwide name (WWN) of the VN_Port.	All
<b>Node-WWN</b>	Unique WWN of the node hosting the VN_Ports.	<b>detail</b>
<b>NP-Port</b>	NP_Port interface connected to the FCoE forwarder (FCF) or the Fibre Channel switch.	All
<b>Class</b>	FLOGI service class.	<b>detail</b>
<b>Fabric port WWN</b>	Unique WWN of the fabric port (VF_Port).	<b>detail</b>
<b>Fabric WWN</b>	Unique WWN of the fabric generated by the FCF.	<b>detail</b>



## Sample Output

### show fibre-channel proxy login-table

```
user@switch> show fibre-channel proxy login-table
Fabric: proxy2, Fabric-id: 200
F-Port          FCID      Port-WWN          NP-Port
-               0x030000  10:00:00:15:17:a9:98:64 fc-0/0/0.0
vlan.100        0x030001  20:00:10:94:00:01:00:01 fc-0/0/0.0
vlan.100        0x030002  20:00:10:94:00:01:00:05 fc-0/0/0.0
vlan.100        0x030003  20:00:10:94:00:02:00:01 fc-0/0/0.0
vlan.100        0x030004  20:00:10:94:00:02:00:05 fc-0/0/0.0
```

### show fibre-channel proxy login-table detail

```
user@switch> show fibre-channel proxy login-table detail
Fabric: proxy2, Fabric-id: 200

FCID:          0x030000
F-Port:        -
NP-Port:       fc-0/0/0.0
Port WWN:      10:00:00:15:17:a9:98:64
Node WWN:      20:c8:11:22:33:44:55:66
Class:         3
Fabric port WWN: 10:00:00:15:17:a9:99:48
Fabric WWN:     00:0a:df:ff:0b:11:22:34

FCID:          0x030001
F-Port:        vlan.100
NP-Port:       fc-0/0/0.0
Port WWN:      20:00:10:94:00:01:00:01
Node WWN:      10:00:10:94:00:00:00:01
Class:         3
Fabric port WWN: 10:00:00:15:17:a9:99:48
Fabric WWN:     00:0a:df:ff:0b:11:22:34

FCID:          0x030002
F-Port:        vlan.100
NP-Port:       fc-0/0/0.0
Port WWN:      20:00:10:94:00:01:00:05
Node WWN:      10:00:10:94:00:00:00:01
Class:         3
Fabric port WWN: 10:00:00:15:17:a9:99:48
Fabric WWN:     00:0a:df:ff:0b:11:22:34

FCID:          0x030003
F-Port:        vlan.100
NP-Port:       fc-0/0/0.0
Port WWN:      20:00:10:94:00:02:00:01
Node WWN:      10:00:10:94:00:00:00:02
Class:         3
Fabric port WWN: 10:00:00:15:17:a9:99:48
Fabric WWN:     00:0a:df:ff:0b:11:22:34

FCID:          0x030004
F-Port:        vlan.100
NP-Port:       fc-0/0/0.0
Port WWN:      20:00:10:94:00:02:00:05
Node WWN:      10:00:10:94:00:00:00:02
Class:         3
Fabric port WWN: 10:00:00:15:17:a9:99:48
Fabric WWN:     00:0a:df:ff:0b:11:22:34
```







## show fibre-channel proxy np-port

<b>Syntax</b>	<code>show fibre-channel proxy np-port</code> <code>&lt;brief   detail&gt;</code> <code>&lt;fabric <i>fabric-name</i>&gt;</code> <code>&lt;interface <i>interface-name</i>&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Fibre Channel gateway fabric proxy Node Port (NP_Port) information.
<b>Options</b>	<code>brief   detail</code> —(Optional) Display the specified level of output.  <code>fabric <i>fabric-name</i></code> —(Optional) Display output only for the specified fabric.  <code>interface <i>interface-name</i></code> —(Optional) Display output only for the specified interface.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring an FCoE-FC Gateway Fibre Channel Fabric on page 4576</a></li> <li>• <a href="#">Monitoring Fibre Channel Interface Load Balancing on page 4665</a></li> <li>• <a href="#">show fibre-channel proxy fabric-state on page 4757</a></li> <li>• <a href="#">show fibre-channel proxy login-table on page 4760</a></li> <li>• <a href="#">show fibre-channel proxy statistics on page 4767</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fibre-channel proxy np-port on page 4766</a> <a href="#">show fibre-channel proxy np-port detail on page 4766</a>
<b>Output Fields</b>	<a href="#">Table 345 on page 4764</a> lists the output fields for the <b>show fibre-channel proxy np-port</b> command. Output fields are listed in the approximate order in which they appear.

**Table 345: show fibre-channel proxy np-port Output Fields**

Field Name	Field Description	Level of Output
<b>Fabric</b>	Name of the fabric.	All
<b>Fabric-id</b>	Fabric ID number.	All
<b>NP-Port</b>	NP_Port interface connected to the FCoE forwarder (FCF) or the Fibre Channel switch.	All
<b>State</b>	FCID state of the NP_Port interface.	All
<b>Sessions</b>	Number of active sessions on the NP_Port interface. A session is a FLOGI or FDISC login to the FC SAN fabric. Session does not refer to end-to-end storage sessions.	All



Table 345: show fibre-channel proxy np-port Output Fields (*continued*)

Field Name	Field Description	Level of Output
Configured max login sessions	Configured maximum number of FIP login sessions permitted on the interface.	detail
Enodes	Number of ENodes with sessions on the NP_Port.	detail
LB state	Load-balancing state: <ul style="list-style-type: none"> <li>• <b>On</b>—Load balancing is on</li> <li>• <b>Off</b>—Load balancing is off.</li> </ul>	All
LB weight	Load balance weight, which reflects the port speed: <ul style="list-style-type: none"> <li>• <b>2</b>—Port speed is 2 Gbps.</li> <li>• <b>4</b>—Port speed is 4 Gbps.</li> <li>• <b>8</b>—Port speed is 8 Gbps.</li> </ul>	All
Ref-count	Reference count internal to Junos OS.	detail
Flags	Flags internal to Junos OS.  <b>NOTE:</b> When an NP_Port interface reaches its configured maximum number of FIP sessions, the <b>Flags</b> field displays the flag <b>MAX-LOGINS-REACHED</b> .	detail



## Sample Output

### show fibre-channel proxy np-port

```
user@switch> show fibre-channel proxy np-port
Fabric: proxy1, Fabric-id: 10
NP-Port      State           Sessions      LB state  LB weight
fc-0/0/0.0   online          3             ON        4
fc-0/0/1.0   online          3             ON        4
fc-0/0/2.0   online          3             ON        4
root@junos1> show fibre-channel proxy np-port detail
```

### show fibre-channel proxy np-port detail

```
user@switch> show fibre-channel proxy login-table detail
Fabric: proxy1, Fabric-id: 10

NP-Port:          fc-0/0/0.0
State:            online
Sessions:         3
Configured max login sessions: 130
Enodes            1
LB state:         ON
LB weight:        4
Ref-count:        4
Flags:            UP LB

NP-Port:          fc-0/0/1.0
State:            online
Sessions:         3
Configured max login sessions: 130
Enodes            2
LB state:         ON
LB weight:        4
Ref-count:        4
Flags:            UP LB

NP-Port:          fc-0/0/2.0
State:            online
Sessions:         130
Configured max login sessions: 130
Enodes            17
LB state:         OFF
LB weight:        4
Ref-count:        131
Flags:            UP MAX-LOGINS-REACHED
```



## show fibre-channel proxy statistics

<b>Syntax</b>	<b>show fibre-channel proxy statistics</b> <b>&lt;fabric <i>fabric-name</i>&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display Fibre Channel proxy fabric statistics.
<b>Options</b>	<b>fabric <i>fabric-name</i></b> —(Optional) Display output only for the specified fabric.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring an FCoE-FC Gateway Fibre Channel Fabric on page 4576</a></li> <li>• <a href="#">show fibre-channel proxy fabric-state on page 4757</a></li> <li>• <a href="#">show fibre-channel proxy login-table on page 4760</a></li> <li>• <a href="#">show fibre-channel proxy np-port on page 4764</a></li> <li>• <a href="#">clear fibre-channel proxy statistics on page 4676</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fibre-channel proxy statistics on page 4769</a>
<b>Output Fields</b>	<a href="#">Table 346 on page 4767</a> lists the output fields for the <b>show fibre-channel proxy statistics</b> command. Output fields are listed in the approximate order in which they appear.

**Table 346: show fibre-channel proxy statistics Output Fields**

Field Name	Field Description
Fabric	Name of the fabric.
Fabric-id	Fabric ID number.



Table 346: show fibre-channel proxy statistics Output Fields (*continued*)

Field Name	Field Description
<b>NP-Port Transmit Command Statistics</b>	Transmitted command statistics for the NP_Port.
<ul style="list-style-type: none"> <li><b>Command</b></li> </ul>	Type of command issued on the NP_Port: <ul style="list-style-type: none"> <li><b>FLOGI</b>—Fabric login commands issued.</li> <li><b>FDISC</b>—Fabric discovery commands issued.</li> <li><b>LOGO</b>—Logout commands issued.</li> <li><b>Others</b>—Other commands issued.</li> </ul>
<ul style="list-style-type: none"> <li><b>Tx</b></li> </ul>	Number of times the command type was transmitted.
<ul style="list-style-type: none"> <li><b>Rx-ACC</b></li> </ul>	Number of times the NP_Port transmitted a receive accept message for the command type.
<ul style="list-style-type: none"> <li><b>Rx-RJT</b></li> </ul>	Number of times the NP_Port transmitted a receive reject message for the command type.
<ul style="list-style-type: none"> <li><b>Abort</b></li> </ul>	Number of times the NP_Port transmitted an abort message for the command type.
<b>NP-Port Receive Command Statistics</b>	Received command statistics for the NP_Port.
<ul style="list-style-type: none"> <li><b>Command</b></li> </ul>	The type of command received on the NP_Port: <ul style="list-style-type: none"> <li><b>LOGO</b>—Logout commands issued.</li> <li><b>Others</b>—Other commands issued.</li> </ul>
<ul style="list-style-type: none"> <li><b>Rx</b></li> </ul>	Number of times the command type was received.
<ul style="list-style-type: none"> <li><b>Tx-ACC</b></li> </ul>	Number of times the NP_Port received a transmit accept message for the command type.
<ul style="list-style-type: none"> <li><b>Tx-RJT</b></li> </ul>	Number of times the NP_Port received a transmit reject message for the command type.
<ul style="list-style-type: none"> <li><b>Abort</b></li> </ul>	Number of times the NP_Port received an abort message for the command type.



## Sample Output

**show fibre-channel  
proxy statistics**

user@switch> **show fibre-channel proxy statistics**

Fabric: proxy1, Fabric-id: 10

NP-Port Transmit Command Statistics:

Command	Tx	Rx-ACC	Rx-RJT	Abort
FLOGI	3	3	0	0
FDISC	3	3	0	0
LOGO	0	0	0	0
Others	0	0	0	0

NP-Port Receive Command Statistics:

Command	Rx	Tx-ACC	Tx-RJT	Abort
LOGO	0	0	0	0
Others	0	0	0	0



## show fip snooping

<b>Syntax</b>	<b>show fip snooping</b> <brief   detail>
<b>Release Information</b>	Command introduced in Junos OS Release 10.4 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display FIP snooping information.
<b>Options</b>	<b>none</b> —Display FIP snooping information.  <b>brief   detail</b> —(Optional) Display the specified level of output.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring VN2VF_Port FIP Snooping on an FCoE Transit Switch on page 4596</a></li> <li>• <a href="#">Example: Configuring an FCoE Transit Switch</a></li> <li>• <a href="#">show fip snooping enode on page 4775</a></li> <li>• <a href="#">show fip snooping fcf on page 4778</a></li> <li>• <a href="#">show fip snooping interface on page 4780</a></li> <li>• <a href="#">show fip snooping statistics on page 4783</a></li> <li>• <a href="#">show fip snooping vlan on page 4786</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fip snooping on page 4773</a> <a href="#">show fip snooping brief (QFX Series) on page 4773</a> <a href="#">show fip snooping detail (QFX Series) on page 4773</a> <a href="#">show fip snooping detail on page 4773</a>
<b>Output Fields</b>	<a href="#">Table 347 on page 4770</a> lists the output fields for the <b>show fip snooping</b> command. Output fields are listed in the approximate order in which they appear.

**Table 347: show fip snooping Output Fields**

Field Name	Field Description	Level of Output
VLAN	Name of the VLAN.	All
Mode	(QFX Series only) Snooping mode enabled on the FCoE VLAN: <ul style="list-style-type: none"> <li>• VN2VF Snooping—The FCoE VLAN is configured for FIP snooping between an ENode VN_Port and a switch VF_Port.</li> <li>• VN2VN Snooping—The FCoE VLAN is configured for VN_Port to VN_Port FIP snooping between ENode VN_Ports.</li> </ul>	All



Table 347: show fip snooping Output Fields (*continued*)

Field Name	Field Description	Level of Output
FC-MAP	FCoE mapped address prefix of the FCoE forwarder for the VLAN.	All
FCF or FCF-MAC	MAC address of the FCF.	All
Session Count or Active Sessions	Current number of virtual link sessions with VN_Ports.	All
VN_Port Count	(QFX Series only) Number of VN_Ports active on an ENode.	<b>brief</b>
Configured FKA-ADV	<p>FIP keepalive interval in seconds configured on the FCF multiplied by three. For example, if the FKA_ADV period configured on the FCF is 86 seconds, the value of this field is 258.</p> <p>For the QFX Series only, the output of this field is always 0 (zero) if the VLAN is an FCoE-FC gateway VLAN. If the VLAN is a FIP snooping VLAN (a transit switch VLAN), then the output is accurate. This is because for an FCoE-FC gateway VLAN, FIP snooping is performed internally and the keepalive advertisements are not tracked by the switch's Ethernet module.</p>	<b>detail</b>
Running FKA-ADV	<p>Runtime interval in seconds of the last FIP keepalive advertisement the FCF received. This value changes every time the FCF receives an FKA_ADV.</p> <p>For the QFX Series only, the output of this field is always 0 (zero) if the VLAN is an FCoE-FC gateway VLAN. If the VLAN is a FIP snooping VLAN (a transit switch VLAN), then the output is accurate. This is because for an FCoE-FC gateway VLAN, FIP snooping is performed internally and the keepalive advertisements are not tracked by the switch's Ethernet module.</p>	<b>detail</b>
Beacon Period	(QFX Series only) Beacon period interval in milliseconds.	<b>detail</b>
VN2VN Mode	<p>(QFX Series only) Mode of VN2VN_Port snooping:</p> <ul style="list-style-type: none"> <li>Multi-Point—Multiple ENodes are connected to the network and form multiple virtual links. Each virtual link is created between one pair of VN_Ports. This is analogous to the loop mode in traditional FC networks.</li> <li>Point-to-Point—Two ENodes are connected to the network and form a single VN_Port to VN_Port virtual link. This is analogous to the point-to-point FC link between an FC initiator and an FC target.</li> </ul>	<b>detail</b>
ENode-MAC	MAC address of the connected FCoE node (ENode).	All
Interface	Interface connected to the ENode.	<b>detail</b>
VN-Port MAC	MAC address of a VN_Port on the ENode.	All



Table 347: show fip snooping Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>FKA-ADV</b>	Runtime interval in seconds of the last FIP keepalive advertisement the ENode sent to the FCF on behalf of the VN_Port (VN_Port FKA_ADV). This value changes every time the ENode sends a VN_Port FKA_ADV to the FCF.	<b>detail</b>
<b>Active VN_Ports</b>	(QFX Series only) Number of VN_Ports active on an ENode.	<b>detail</b>
<b>Vlink far-end VN-Port-MAC</b>	(QFX Series only) Media access control (MAC) address of the VN_Port at the other end of the virtual link.	<b>detail</b>



## Sample Output

### show fip snooping

```
user@switch> show fip snooping
VLAN : fcoevlan1      FC-MAP : 0e:fc:00
FCF : 00:10:94:00:00:01  Session Count : 2
  Enode-MAC : 00:10:94:00:00:02
  VN-Port-MAC : 0E:FC:00:00:00:05
  VN-Port-MAC : 0E:FC:00:00:00:01
```

### show fip snooping brief (QFX Series)

```
user@switch> show fip snooping brief
VLAN: vlan100,      Mode: VN2VF Snooping
FC-MAP: 0e:fc:00
FCF: 30:10:94:01:00:00  Session Count: 2
  Enode-MAC: 10:10:94:01:00:01
  VN-Port-MAC: 0e:fc:00:01:0d:01
  VN-Port-MAC: 0e:fc:00:01:0e:01
VLAN: vlan101,      Mode: VN2VN Snooping
FC-MAP: 0e:fc:00
  Enode-MAC: 10:10:94:01:00:02 VN_Port count: 1
  VN-Port-MAC: 0e:fc:00:01:0a:01 Session Count: 2
  Enode-MAC: 10:10:94:01:00:03 VN_Port count: 0
```

### show fip snooping detail (QFX Series)

```
user@switch> show fip snooping detail
root@sw-pa02v> show fip snooping detail
VLAN: vlan100,      Mode: VN2VF Snooping
FC-MAP: 0e:fc:00
FCF Information
FCF-MAC           : 30:10:94:01:00:00
Active Sessions   : 2
Configured FKA-ADV : 258
Running FKA-ADV   : 188
  Enode Information
  Enode-MAC: 10:10:94:01:00:01,      Interface: xe-0/0/10
  Configured FKA-ADV : 258
  Running FKA-ADV   : 230
    Session Information
    VN-Port MAC: 0e:fc:00:01:0d:01,   FKA-ADV : 230
    VN-Port MAC: 0e:fc:00:01:0e:01,   FKA-ADV : 245

VLAN: vlan101,      Mode: VN2VN Snooping
FC-MAP: 0e:fc:00
Beacon_Period: 90000
VN2VN Mode: Multi-Point
  Enode Information
  Enode-MAC: 10:10:94:01:00:02,      Interface: xe-0/0/10
  Active VN_Ports : 1
  VN_Port Information
  VN-Port MAC: 0e:fc:00:01:0a:01
  Active Sessions   : 2
    Session Information
    Vlink far-end VN-Port-MAC: 0e:fc:00:01:0b:01
    Vlink far-end VN-Port-MAC: 0e:fc:00:01:0c:01
  Enode-MAC: 10:10:94:01:00:02,      Interface: xe-0/0/11
  Active VN_Ports : 0
```

### show fip snooping

```
user@switch> show fip snooping detail
VLAN : fcoevlan1      FC-MAP : 0e:fc:00
```



detail

```
FCF Information
FCF-MAC      : 00:10:94:00:00:01
Active Sessions : 2
Configured FKA-ADV : 258
Running FKA-ADV  : 244
  Enode Information
    Enode-MAC : 00:10:94:00:00:02      Interface : xe-0/0/1
    Configured FKA-ADV : 258
    Running FKA-ADV  : 248
      Session Information
        VN-Port MAC : 0E:FC:00:00:00:05  FKA-ADV : 264
        VN-Port MAC : 0E:FC:00:00:00:01  FKA-ADV : 260
```



## show fip snooping enode

<b>Syntax</b>	<b>show fip snooping enode <i>enode-mac</i></b> <b>&lt;brief   detail&gt;</b> <b>&lt;vlan <i>vlan-name</i>&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 10.4 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display FIP snooping FCoE node (ENode) information.
<b>Options</b>	<b>brief   detail</b> —(Optional) Display the specified level of output.  <b><i>enode-mac</i></b> —Display information for the ENode specified by the MAC address.  <b>vlan <i>vlan-name</i></b> —(Optional) Display FIP snooping information for the ENode on only the specified VLAN.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring VN2VF_Port FIP Snooping on an FCoE Transit Switch on page 4596</a></li> <li>• <a href="#">Example: Configuring an FCoE Transit Switch</a></li> <li>• <a href="#">show fip snooping on page 4770</a></li> <li>• <a href="#">show fip snooping fcf on page 4778</a></li> <li>• <a href="#">show fip snooping interface on page 4780</a></li> <li>• <a href="#">show fip snooping statistics on page 4783</a></li> <li>• <a href="#">show fip snooping vlan on page 4786</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fip snooping enode on page 4777</a> <a href="#">show fip snooping enode brief (QFX Series) on page 4777</a> <a href="#">show fip snooping enode detail (QFX Series) on page 4777</a> <a href="#">show fip snooping enode detail on page 4777</a>
<b>Output Fields</b>	<a href="#">Table 348 on page 4775</a> lists the output fields for the <b>show fip snooping enode</b> command. Output fields are listed in the approximate order in which they appear.

**Table 348: show fip snooping enode Output Fields**

Field Name	Field Description	Level of Output
ENode and ENode MAC	MAC address of the ENode.	All
VLAN	Name of the VLAN.	All
Interface	Interface connected to the ENode.	All



Table 348: show fip snooping enode Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Mode</b>	(QFX Series only) Snooping mode enabled on the FCoE VLAN: <ul style="list-style-type: none"> <li>VN2VF Snooping—The FCoE VLAN is configured for FIP snooping between an ENode VN_Port and a switch VF_Port.</li> <li>VN2VN Snooping—The FCoE VLAN is configured for VN_Port to VN_Port FIP snooping between ENode VN_Ports.</li> </ul>	All
<b>VN_Port Count</b>	(QFX Series only) Number of VN_Ports active on an ENode.	<b>brief</b>
<b>Session Count</b>	Current number of virtual link sessions with VN_Ports.	All
<b>Configured FKA-ADV</b>	FIP keepalive interval in seconds configured on the FCoE forwarder (FCF) multiplied by three. For example, if the FKA_ADV period configured on the FCF is 86 seconds, the value of this field is 258. This value remains constant.  For the QFX Series only, the output of this field is always 0 (zero) if the VLAN is an FCoE-FC gateway VLAN. If the VLAN is a FIP snooping VLAN (a transit switch VLAN), then the output is accurate. This is because for an FCoE-FC gateway VLAN, FIP snooping is performed internally and the keepalive advertisements are not tracked by the switch's Ethernet module.	<b>detail</b>
<b>Running FKA-ADV</b>	Runtime interval in seconds of the last FIP keepalive advertisement the ENode sent to the FCF. This value changes every time the ENode sends an FKA_ADV to the FCF.  For the QFX Series only, the output of this field is always 0 (zero) if the VLAN is an FCoE-FC gateway VLAN. If the VLAN is a FIP snooping VLAN (a transit switch VLAN), then the output is accurate. This is because for an FCoE-FC gateway VLAN, FIP snooping is performed internally and the keepalive advertisements are not tracked by the switch's Ethernet module.	<b>detail</b>
<b>VN-Port or VN-Port-MAC</b>	MAC address of a VN_Port on the ENode.	All
<b>FKA-ADV</b>	Runtime interval in seconds of the last FIP keepalive advertisement the ENode sent to the FCF on behalf of the VN_Port (VN_Port FKA_ADV). This value changes every time the ENode sends a VN_Port FKA_ADV to the FCF.	<b>detail</b>
<b>FCF or FCF-MAC</b>	MAC address of the FCF to which the VN_Port is connected.	All
<b>Beacon Period</b>	(QFX Series only) Beacon period interval in milliseconds.	<b>detail</b>



Table 348: show fip snooping enode Output Fields (*continued*)

Field Name	Field Description	Level of Output
VN2VN Mode	(QFX Series only) Mode of VN2VN_Port snooping: <ul style="list-style-type: none"> <li>Multi-Point—Multiple ENodes are connected to the network and form multiple virtual links. Each virtual link is created between one pair of VN_Ports. This is analogous to the loop mode in traditional FC networks.</li> <li>Point-to-Point—Two ENodes are connected to the network and form a single VN_Port to VN_Port virtual link. This is analogous to the point-to-point FC link between an FC initiator and an FC target.</li> </ul>	detail
Vlink far-end VN-Port-MAC	(QFX Series only) Media access control (MAC) address of the VN_Port at the other end of the virtual link.	detail

## Sample Output

### show fip snooping enode

```
user@switch> show fip snooping enode 00:10:94:00:00:02
Enode : 00:10:94:00:00:02   VLAN : vlan1   Interface : xe-0/0/1
      VN-Port-MAC         FCF-MAC
      0E:FC:00:00:00:05    00:10:94:00:00:01
      0E:FC:00:00:00:01    00:10:94:00:00:01
```

### show fip snooping enode brief (QFX Series)

```
user@switch> show fip snooping enode 10:10:94:01:00:02 brief
Enode: 10:10:94:01:00:02 , VLAN: vlan101, Interface: xe-0/0/10
Mode: VN2VF Snooping      VN_Port Count: 1
VN_Port Information
VN_Port Mac: 0e:fc:00:01:0a:01      Session Count: 2
```

### show fip snooping enode detail (QFX Series)

```
user@switch> show fip snooping enode 10:10:94:01:00:02 detail
Enode MAC: 10:10:94:01:00:02, VLAN: vlan101, Interface: xe-0/0/10
Mode: VN2VF Snooping      VN_Port Count: 1
Beacon_Period: 90000      VN2VN Mode: Multi-Point
VN_Port Information
VN_Port Mac: 0e:fc:00:01:0a:01      Session Count: 2
Vlink far-end VN-Port-MAC: 0e:fc:00:01:0b:01
Vlink far-end VN-Port-MAC: 0e:fc:00:01:0c:01
```

### show fip snooping enode detail

```
user@switch> show fip snooping enode 00:10:94:00:00:02 detail
Enode MAC : 00:10:94:00:00:02   VLAN : vlan1   Interface : xe-0/0/1
Configured FKA-ADV : 258      Running FKA-ADV : 213
Session Information
VN-Port : 0E:FC:00:00:00:05    FKA-ADV : 229    FCF : 00:10:94:00:00:01
VN-Port : 0E:FC:00:00:00:01    FKA-ADV : 225    FCF : 00:10:94:00:00:01
```



## show fip snooping fcf

<b>Syntax</b>	<b>show fip snooping fcf <i>fcf-mac</i></b> <b>&lt;brief   detail&gt;</b> <b>&lt;vlan <i>vlan-name</i>&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 10.4 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display FIP snooping FCoE forwarder (FCF) information.
<b>Options</b>	<b>brief   detail</b> —(Optional) Display the specified level of output.  <b><i>fcf-mac</i></b> —Display information for the FCF specified by the MAC address.  <b><i>vlan-name</i></b> —(Optional) Display FIP snooping information for the FCF on only the specified VLAN.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring VN2VF_Port FIP Snooping on an FCoE Transit Switch on page 4596</a></li> <li>• <a href="#">Example: Configuring an FCoE Transit Switch</a></li> <li>• <a href="#">show fip snooping on page 4770</a></li> <li>• <a href="#">show fip snooping enode on page 4775</a></li> <li>• <a href="#">show fip snooping interface on page 4780</a></li> <li>• <a href="#">show fip snooping statistics on page 4783</a></li> <li>• <a href="#">show fip snooping vlan on page 4786</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fip snooping fcf on page 4779</a> <a href="#">show fip snooping fcf detail on page 4779</a>
<b>Output Fields</b>	<a href="#">Table 349 on page 4778</a> lists the output fields for the <b>show fip snooping fcf</b> command. Output fields are listed in the approximate order in which they appear.

**Table 349: show fip snooping fcf Output Fields**

Field Name	Field Description	Level of Output
FCF or FCF-MAC	MAC address of the FCoE forwarder.	All
VLAN	Name of the VLAN.	All
Session Count	Current number of virtual link sessions with VN_Ports.	None



Table 349: show fip snooping fcf Output Fields (*continued*)

Field Name	Field Description	Level of Output
Configured FKA-ADV	FIP keepalive interval in seconds configured on the FCF multiplied by three. For example, if the FKA_ADV period configured on the FCF is 86 seconds, the value of this field is 258.	detail
Running FKA-ADV	Runtime interval in seconds of the last FIP keepalive advertisement the FCF received. This value changes every time the FCF receives an FKA_ADV.	detail
ENode-MAC	MAC address of the connected ENode.	All
• Interface	Interface connected to the ENode.	detail
• Configured FKA-ADV	FIP keepalive interval in seconds configured on the FCF multiplied by three. For example, if the FKA_ADV period configured on the FCF is 86 seconds, the value of this field is 258. This value remains constant.	detail
• Running FKA-ADV	Runtime interval in seconds of the last FIP keepalive advertisement the ENode sent to the FCF. This value changes every time the ENode sends an FKA_ADV to the FCF.	detail
• VN-Port MAC	MAC address of a VN_Port on the ENode.	All
• FKA-ADV	Runtime interval in seconds of the last FIP keepalive advertisement the ENode sent to the FCF on behalf of the VN_Port (VN_Port FKA_ADV). This value changes every time the ENode sends a VN_Port FKA_ADV to the FCF.	detail

## Sample Output

```

show fip snooping fcf  user@switch> show fip snooping fcf 00:10:94:00:00:01
FCF : 00:10:94:00:00:01  VLAN : v1an1  Session Count : 2
  ENode-MAC : 00:10:94:00:00:02
    VN-Port-MAC : 0E:FC:00:00:00:05
      VN-Port-MAC : 0E:FC:00:00:00:01

```

```

show fip snooping fcf  user@switch> show fip snooping fcf 00:10:94:00:00:01 detail
detail
FCF-MAC : 00:10:94:00:00:01  VLAN : v1an1
Configured FKA-ADV : 258      Running FKA-ADV : 222
  ENode Information
    ENode-MAC : 00:10:94:00:00:02 Interface: xe-0/0/1
      Configured FKA-ADV : 258
        Running FKA-ADV : 226
          Session Information
            VN-Port MAC : 0E:FC:00:00:00:05  FKA-ADV : 242
              VN-Port MAC : 0E:FC:00:00:00:01  FKA-ADV : 238

```



## show fip snooping interface

<b>Syntax</b>	<b>show fip snooping interface</b> <i>interface-name</i> <brief   detail>
<b>Release Information</b>	Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Display FIP snooping information for the specified interface.
<b>Options</b>	<b>brief   detail</b> —(Optional) Display the specified level of output.  <b>interface-name</b> —Display information for the specified interface.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring VN2VF_Port FIP Snooping on an FCoE Transit Switch on page 4596</a></li> <li>• <a href="#">show fip snooping on page 4770</a></li> <li>• <a href="#">show fip snooping enode on page 4775</a></li> <li>• <a href="#">show fip snooping fcf on page 4778</a></li> <li>• <a href="#">show fip snooping statistics on page 4783</a></li> <li>• <a href="#">show fip snooping vlan on page 4786</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fip snooping interface on page 4782</a> <a href="#">show fip snooping interface detail on page 4782</a>
<b>Output Fields</b>	<a href="#">Table 350 on page 4780</a> lists the output fields for the <b>show fip snooping interface interface-name</b> command. Output fields are listed in the approximate order in which they appear.

**Table 350: show fip snooping interface Output Fields**

Field Name	Field Description	Level of Output
VLAN	Name of the VLAN.	All
FC-MAP	FCoE mapped address prefix of the FCoE forwarder for the VLAN.	All
FCF or FCF-MAC	MAC address of the FCF.	All
Session Count or Active Sessions	Current number of virtual link sessions with VN_Ports.	All



Table 350: show fip snooping interface Output Fields (*continued*)

Field Name	Field Description	Level of Output
Configured FKA-ADV	<p>FIP keepalive interval in seconds configured on the FCF multiplied by three. For example, if the FKA_ADV period configured on the FCF is 86 seconds, the value of this field is 258.</p> <p>For the QFX Series only, the output of this field is always 0 (zero) if the VLAN is an FCoE-FC gateway VLAN. If the VLAN is a FIP snooping VLAN (a transit switch VLAN), then the output is accurate. This is because for an FCoE-FC gateway VLAN, FIP snooping is performed internally and the keepalive advertisements are not tracked by the switch's Ethernet module.</p>	detail
Running FKA-ADV	<p>Runtime interval in seconds of the last FIP keepalive advertisement the FCF received. This value changes every time the FCF receives an FKA_ADV.</p> <p>For the QFX Series only, the output of this field is always 0 (zero) if the VLAN is an FCoE-FC gateway VLAN. If the VLAN is a FIP snooping VLAN (a transit switch VLAN), then the output is accurate. This is because for an FCoE-FC gateway VLAN, FIP snooping is performed internally and the keepalive advertisements are not tracked by the switch's Ethernet module.</p>	detail
ENode-MAC	MAC address of the connected FCoE node (ENode).	All
Interface	Interface connected to the ENode.	detail
Configured FKA-ADV	<p>FIP keepalive interval in seconds configured on the FCF multiplied by three. For example, if the FKA_ADV period configured on the FCF is 86 seconds, the value of this field is 258. This value remains constant.</p> <p>For the QFX Series only, the output of this field is always 0 (zero) if the VLAN is an FCoE-FC gateway VLAN. If the VLAN is a FIP snooping VLAN (a transit switch VLAN), then the output is accurate. This is because for an FCoE-FC gateway VLAN, FIP snooping is performed internally and the keepalive advertisements are not tracked by the switch's Ethernet module.</p>	detail
Running FKA-ADV	<p>Runtime interval in seconds of the last FIP keepalive advertisement the ENode sent to the FCF. This value changes every time the ENode sends an FKA_ADV to the FCF.</p> <p>For the QFX Series only, the output of this field is always 0 (zero) if the VLAN is an FCoE-FC gateway VLAN. If the VLAN is a FIP snooping VLAN (a transit switch VLAN), then the output is accurate. This is because for an FCoE-FC gateway VLAN, FIP snooping is performed internally and the keepalive advertisements are not tracked by the switch's Ethernet module.</p>	detail
VN-Port MAC	MAC address of a VN_Port on the ENode.	All



Table 350: show fip snooping interface Output Fields (*continued*)

Field Name	Field Description	Level of Output
FKA-ADV	Runtime interval in seconds of the last FIP keepalive advertisement the ENode sent to the FCF on behalf of the VN_Port (VN_Port FKA_ADV). This value changes every time the ENode sends a VN_Port FKA_ADV to the FCF.	<b>detail</b>

## Sample Output

### show fip snooping interface

```
user@switch> show fip snooping interface xe-0/0/9.0
VLAN: vlan_100, FC-MAP: 0e:fc:00
FCF: 30:10:94:01:00:00 Session Count: 1
Enode-MAC: 10:10:94:01:00:01
VN-Port-MAC: 0e:fc:00:01:0a:01
```

### show fip snooping interface detail

```
user@switch> show fip snooping interface xe-0/0/9.0 detail
VLAN: vlan_100, FC-MAP: 0e:fc:00
FCF Information
FCF-MAC : 30:10:94:01:00:00
Active Sessions : 1
Configured FKA-ADV : 368640000
Running FKA-ADV : 0
Enode Information
Enode-MAC: 10:10:94:01:00:01, Interface: xe-0/0/9
Configured FKA-ADV : 368640000
Running FKA-ADV : 0
Session Information
VN-Port MAC: 0e:fc:00:01:0a:01, FKA-ADV : 0
```



## show fip snooping statistics

<b>Syntax</b>	<b>show fip snooping statistics</b> <b>&lt;vlan <i>vlan-name</i>&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 10.4 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display FIP snooping statistics.
<b>Options</b>	<b>vlan <i>vlan-name</i></b> —(Optional) Display FIP snooping statistics for the specified VLAN.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring an FCoE Transit Switch</a></li> <li>• <a href="#">Configuring VN2VF_Port FIP Snooping on an FCoE Transit Switch on page 4596</a></li> <li>• <a href="#">show fip snooping on page 4770</a></li> <li>• <a href="#">show fip snooping enode on page 4775</a></li> <li>• <a href="#">show fip snooping fcf on page 4778</a></li> <li>• <a href="#">show fip snooping interface on page 4780</a></li> <li>• <a href="#">show fip snooping vlan on page 4786</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fip snooping statistics (FIP Snooping) on page 4785</a> <a href="#">show fip snooping statistics (VN2VN_Port Snooping) on page 4785</a>
<b>Output Fields</b>	Table 351 on page 4783 lists the output fields for the <b>show fip snooping statistics</b> command. Output fields are listed in the approximate order in which they appear.

**Table 351: show fip snooping statistics Output Fields**

Field Name	Field Description
<b>VLAN</b>	Name of the VLAN for which a set of statistics is displayed.
<b>Mode</b>	(QFX Series only) Snooping mode enabled on the FCoE VLAN: <ul style="list-style-type: none"> <li>• VN2VF Snooping—The FCoE VLAN is configured for FIP snooping between an ENode VN_Port and a switch VF_Port.</li> <li>• VN2VN Snooping—The FCoE VLAN is configured for VN_Port to VN_Port FIP snooping between ENode VN_Ports.</li> </ul>
<b>Number of MDS</b>	Number of multicast discovery solicitation messages sent on the VLAN.
<b>Number of UDS</b>	Number of unicast discovery solicitation messages sent on the VLAN.



Table 351: show fip snooping statistics Output Fields (*continued*)

Field Name	Field Description
Number of FLOGI	Number of fabric logins on the VLAN.
Number of FDISC	Number of fabric discovery logins on the VLAN.
Number of LOGO	Number of fabric logouts on the VLAN.
Number of ENode-keep-alive	Number of ENode keepalive messages sent on the VLAN.
Number of VNPort-keep-alive	Number of VN_Port keepalive messages sent on the VLAN.
Number of MDA	Number of multicast discovery advertisement messages sent on the VLAN.
Number of UDA	Number of unicast discovery advertisement messages sent on the VLAN.
Number of FLOGI_ACC	Number of fabric logins accepted on the VLAN.
Number of FLOGI_RJT	Number of fabric logins rejected on the VLAN.
Number of FDISC_ACC	Number of fabric discoveries accepted on the VLAN.
Number of FDISC_RJT	Number of fabric discoveries rejected on the VLAN.
Number of LOGO_ACC	Number of fabric logouts accepted on the VLAN.
Number of LOGO_RJT	Number of fabric logouts rejected on the VLAN.
Number of CVL	Number of clear virtual links (CVL) actions on the VLAN.
Number of VN_Port Probes Req	(QFX Series only) Number of multicast N_Port_ID probes sent to the ALL-VN2VN-ENode-MACs multicast address on the VLAN.
Number of VN_Port Claim Notif	(QFX Series only) Number of multicast N_Port_ID claim notifications sent on the VLAN.
Number of VN_Port Beacons	(QFX Series only) Number of multicast beacons sent on the VLAN.
Number of VN_Port Probes Reply	(QFX Series only) Number of replies to N_Port_ID probes sent on the VLAN. Replies are unicast to the ENode MAC address of the probe requester.
Number of VN_Port Claim Reply	(QFX Series only) Number of replies to N_Port_ID claim notifications sent on the VLAN. Replies are unicast to the ENode MAC address of the claim notifier.



## Sample Output

show fip snooping  
statistics (FIP  
Snooping)

```
user@switch> show fip snooping statistics
VLAN: fcoevlan1      Mode: VN2VF Snooping

Number of MDS:                2
Number of UDS:                2
Number of FLOGI:              2
Number of FDISC:              2
Number of LOGO:               0
Number of Enode-keep-alive: 200
Number of VNPort-keep-alive: 200

Number of MDA:                25
Number of UDA:                2
Number of FLOGI_ACC:          2
Number of FLOGI_RJT:          0
Number of FDISC_ACC:          2
Number of FDISC_RJT:          0
Number of LOGO_ACC:           0
Number of LOGO_RJT:           0
Number of CVL:                0
```

show fip snooping  
statistics (VN2VN\_Port  
Snooping)

```
user@switch> show fip snooping statistics
VLAN: vlan101      Mode: VN2VN Snooping

Number of VN_Port Probes Req:    3
Number of VN_Port Claim Notif:   3
Number of VN_Port Beacons:       0

Number of VN_Port Probes Reply:  3
Number of VN_Port Claim Reply:   3
Number of FLOGI:                 0
Number of FLOGI_ACC:             0
Number of FLOGI_RJT:             0
Number of FDISC:                 0
Number of FDISC_ACC:             0
Number of FDISC_RJT:             0
Number of LOGO:                  0
Number of LOGO_ACC:              0
Number of LOGO_RJT:              0
```



## show fip snooping vlan

<b>Syntax</b>	<b>show fip snooping vlan <i>vlan-name</i></b> <b>&lt;brief   detail&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 10.4 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series.
<b>Description</b>	Display FIP snooping VLAN information.
<b>Options</b>	<b>brief   detail</b> —(Optional) Display the specified level of output.  <b><i>vlan-name</i></b> —Display information for the specified VLAN.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring VN2VF_Port FIP Snooping on an FCoE Transit Switch on page 4596</a></li> <li>• <a href="#">Example: Configuring an FCoE Transit Switch</a></li> <li>• <a href="#">show fip snooping on page 4770</a></li> <li>• <a href="#">show fip snooping enode on page 4775</a></li> <li>• <a href="#">show fip snooping fcf on page 4778</a></li> <li>• <a href="#">show fip snooping interface on page 4780</a></li> <li>• <a href="#">show fip snooping statistics on page 4783</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fip snooping vlan on page 4788</a> <a href="#">show fip snooping vlan (QFX Series, VN2VF_Port FIP Snooping) on page 4788</a> <a href="#">show fip snooping vlan (QFX Series, VN2VN_Port FIP Snooping) on page 4788</a> <a href="#">show fip snooping vlan detail (QFX Series, VN2VN_Port FIP Snooping) on page 4789</a> <a href="#">show fip snooping vlan detail on page 4789</a>
<b>Output Fields</b>	<a href="#">Table 352 on page 4786</a> lists the output fields for the <b>show fip snooping vlan</b> command. Output fields are listed in the approximate order in which they appear.

**Table 352: show fip snooping vlan Output Fields**

Field Name	Field Description	Level of Output
VLAN	Name of the VLAN.	All



Table 352: show fip snooping vlan Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Mode</b>	(QFX Series only) Snooping mode enabled on the FCoE VLAN: <ul style="list-style-type: none"> <li>VN2VF Snooping—The FCoE VLAN is configured for FIP snooping between an ENode VN_Port and a switch VF_Port.</li> <li>VN2VN Snooping—The FCoE VLAN is configured for VN_Port to VN_Port FIP snooping between ENode VN_Ports.</li> </ul>	All
<b>VN_Port count</b>	(QFX Series only) Number of VN_Ports active on an ENode when the mode is VN2VN_Port FIP snooping.	
<b>FC-MAP</b>	FCoE mapped address prefix of the FCoE forwarder for the VLAN.	All
<b>Beacon_Period</b>	(QFX Series only) Beacon period interval in milliseconds.	<b>detail</b>
<b>VN2VN Mode</b>	(QFX Series only) Mode of VN2VN_Port snooping: <ul style="list-style-type: none"> <li>Multi-Point—Multiple ENodes are connected to the network and form multiple virtual links. Each virtual link is created between one pair of VN_Ports. This is analogous to the loop mode in traditional FC networks.</li> <li>Point-to-Point—Two ENodes are connected to the network and form a single VN_Port to VN_Port virtual link. This is analogous to the point-to-point FC link between an FC initiator and an FC target.</li> </ul>	<b>detail</b>
<b>FCF or FCF-MAC</b>	MAC address of the FCF.	All
<b>Session Count or Active Sessions</b>	Current number of virtual link sessions with VN_Ports.	All
<b>Configured FKA-ADV</b>	FIP keepalive interval in seconds configured on the FCF multiplied by three. For example, if the FKA_ADV period configured on the FCF is 86 seconds, the value of this field is 258.	<b>detail</b>
<b>Running FKA-ADV</b>	Runtime interval in seconds of the last FIP keepalive advertisement the FCF received. This value changes every time the FCF receives an FKA_ADV.	<b>detail</b>



Table 352: show fip snooping vlan Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>ENode-MAC</b>	MAC address of the connected ENode.	All
• <b>Interface</b>	Interface connected to the ENode.	<b>detail</b>
• <b>Configured FKA-ADV</b>	FIP keepalive interval in seconds configured on the FCF multiplied by three. For example, if the FKA_ADV period configured on the FCF is 86 seconds, the value of this field is 258. This value remains constant.	<b>detail</b>
• <b>Running FKA-ADV</b>	Runtime interval in seconds of the last FIP keepalive advertisement the ENode sent to the FCF. This value changes every time the ENode sends an FKA_ADV to the FCF.	<b>detail</b>
• <b>VN-Port MAC</b>	MAC address of a VN_Port on the ENode.	All
• <b>FKA-ADV</b>	Runtime interval in seconds of the last FIP keepalive advertisement the ENode sent to the FCF on behalf of the VN_Port (VN_Port FKA_ADV). This value changes every time the ENode sends a VN_Port FKA_ADV to the FCF.	<b>detail</b>
• <b>Active VN_Ports</b>	(QFX Series only) Number of VN_Ports active on an ENode.	<b>detail</b>
• <b>Vlink far-end VN-Port-MAC</b>	(QFX Series only) Media access control (MAC) address of the VN_Port at the other end of the virtual link.	<b>detail</b>

## Sample Output

```
show fip snooping vlan user@switch> show fip snooping vlan fcoevlan1
VLAN : fcoevlan1      FC-MAP : 0e:fc:00
FCF : 00:10:94:00:00:01  Session Count : 2
  ENode-MAC : 00:10:94:00:00:02
    VN-Port-MAC : 0E:FC:00:00:00:05
      VN-Port-MAC : 0E:FC:00:00:00:01
```

```
show fip snooping vlan user@switch> show fip snooping vlan fcoevlan1
(QFX Series,          VLAN : fcoevlan1      Mode: VN2VF Snooping
VN2VF_Port FIP       FC-MAP : 0e:fc:00
Snooping)            FCF : 00:10:94:00:00:01  Session Count : 2
                      ENode-MAC : 00:10:94:00:00:02
                      VN-Port-MAC : 0E:FC:00:00:00:05
                      VN-Port-MAC : 0E:FC:00:00:00:01
```

```
show fip snooping vlan user@switch> show fip snooping vlan vlan101
(QFX Series,          VLAN: vlan101,      Mode: VN2VN Snooping
Snooping)             FC-MAP: 0e:fc:00
```



### VN2VN\_Port FIP Snooping)

```

Enode-MAC: 10:10:94:01:00:02 VN_Port count: 1
VN-Port-MAC: 0e:fc:00:01:0a:01 Session Count: 2
Enode-MAC: 10:10:94:01:00:03 VN_Port count: 0

```

### show fip snooping vlan detail (QFX Series, VN2VN\_Port FIP Snooping)

```

user@switch> show fip snooping vlan vlan101 detail
VLAN: vlan101, Mode: VN2VN Snooping
FC-MAP: 0e:fc:00
Beacon_Period: 90000
VN2VN Mode: Multi-Point
Enode Information
Enode-MAC: 10:10:94:01:00:02, Interface: xe-0/0/10
Active VN_Ports : 1
VN_Port Information
VN-Port MAC: 0e:fc:00:01:0a:01
Active Sessions : 2
Session Information
Vlink far-end VN-Port-MAC: 0e:fc:00:01:0b:01
Vlink far-end VN-Port-MAC: 0e:fc:00:01:0c:01
Enode-MAC: 10:10:94:01:00:02, Interface: xe-0/0/11
Active VN_Ports : 0

```

### show fip snooping vlan detail

```

user@switch> show fip snooping vlan fcoevlan1 detail
VLAN : fcoevlan1 FC-MAP : 0e:fc:00
FCF Information
FCF-MAC : 00:10:94:00:00:01
Active Sessions : 2
Configured FKA-ADV : 258
Running FKA-ADV : 235
Enode Information
Enode-MAC : 00:10:94:00:00:02 Interface : xe-0/0/1
Configured FKA-ADV : 258
Running FKA-ADV : 239
Session Information
VN-Port MAC : 0E:FC:00:00:00:05 FKA-ADV : 255
VN-Port MAC : 0E:FC:00:00:00:01 FKA-ADV : 251

```



## show fip vlan-discovery

<b>Syntax</b>	<b>show fip vlan-discovery (enodes   statistics)</b>
<b>Release Information</b>	Command introduced in Junos OS Release 12.1 for the QFX Series.
<b>Description</b>	Display FCoE VLAN information from the Fibre Channel switch or FCoE forwarder (FCF).
<b>Options</b>	<b>enodes</b> —Display VLAN discovery information for each ENode. <b>statistics</b> —Display VLAN discovery information statistics.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">clear fip vlan-discovery statistics on page 4680</a></li> <li>• <a href="#">Understanding FIP Functions on page 4408</a></li> <li>• <a href="#">Understanding FIP Implementation on page 4412</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show fip vlan-discovery enodes on page 4791</a> <a href="#">show fip vlan-discovery statistics (QFX3500) on page 4791</a> <a href="#">show fip vlan-discovery statistics (QFabric Systems) on page 4791</a>
<b>Output Fields</b>	<a href="#">Table 353 on page 4790</a> lists the output fields for the <b>show fip vlan-discovery</b> command. Output fields are listed in the approximate order in which they appear.

**Table 353: show fip vlan-discovery Output Fields**

Field Name	Field Description	Level of Output
<b>Enode-MAC</b>	Media access control (MAC) address of the ENode.	<b>enodes</b>
<b>Interface</b>	Name of the interface.	<b>enodes</b>
<b>Unsolicited notification count</b>	Number of unsolicited VLAN discovery notifications.	All
<b>Solicited notification count</b>	Number of solicited VLAN discovery notifications.	<b>statistics</b>
<b>Node Group Name</b>	Displays the name of the Node group on QFabric systems.	<b>statistics</b>
<b>Request count</b>	Number of VLAN discovery requests sent by the ENode. This number should match the <b>Solicited notification count</b> number.	<b>statistics</b>
<b>VLAN tags</b>	Tags of the FIP-enabled VLANs.	<b>enodes</b>



## Sample Output

show fip  
vlan-discovery enodes

user@switch> show fip vlan-discovery enodes

Enode-MAC	Interface	Unsolicited Notification Count	Vlan Tags
00:10:94:00:00:02	xe-0/0/9.0	0	400

show fip  
vlan-discovery  
statistics (QFX3500)

user@switch> show fip vlan-discovery statistics

Request count: 0  
Solicited notification count: 0  
Unsolicited notification count: 1

show fip  
vlan-discovery  
statistics (QFabric  
Systems)

user@switch> show fip vlan-discovery statistics

NW-NG-0:

-----  
Request count: 0  
Solicited notification count: 0  
Unsolicited notification count: 1

BBAK0399:

-----  
Request count: 0  
Solicited notification count: 0  
Unsolicited notification count: 1

FCG001:

-----  
Request count: 0  
Solicited notification count: 0  
Unsolicited notification count: 1



## show route forwarding-table family fibre-channel

---

Syntax	<pre>show route forwarding-table family fibre-channel &lt;brief   detail   extensive&gt; &lt;all&gt; &lt;destination <i>destination-prefix</i>&gt; &lt;interface-name <i>interface-name</i>&gt; &lt;label <i>label</i>&gt; &lt;matching <i>ip-prefix</i>&gt; &lt;multicast&gt; &lt;summary&gt; &lt;table <i>routing-table-name</i>&gt; &lt;vlan <i>vlan-name</i>&gt; &lt;vpn <i>vpn-instance-name</i>&gt;</pre>
Release Information	Command introduced in Junos OS Release 11.1 for the QFX Series.
Description	Display Fibre Channel family forwarding table route information.
Options	<p><b>brief   detail   extensive</b>—(Optional) Display the specified level of output.</p> <p><b>all</b>—Display all routing forwarding tables.</p> <p><b>destination <i>destination-prefix</i></b>—Destination prefix.</p> <p><b>interface-name <i>interface-name</i></b>—Name of the interface.</p> <p><b>label <i>label</i></b>—Display route entries for the specified label name.</p> <p><b>matching <i>ip-prefix</i></b>—Display route entries for the specified IP prefix or length.</p> <p><b>multicast</b>—Display multicast routes.</p> <p><b>summary</b>—Display route count instead of details.</p> <p><b>table <i>routing-table-name</i></b>—Name of the routing table.</p> <p><b>vlan <i>vlan-name</i></b>—Name of the VLAN.</p> <p><b>vpn <i>vpn-instance-name</i></b>—Name of the VPN instance.</p>
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">show fibre-channel next-hops on page 4754</a></li><li>• <a href="#">show fibre-channel routes on page 4755</a></li></ul>
List of Sample Output	<a href="#">show route forwarding-table family fibre-channel on page 4793</a>
Output Fields	<a href="#">Table 354 on page 4793</a> lists the output fields for the <b>show route forwarding-table family fibre-channel</b> command. Output fields are listed in the approximate order in which they appear.



Table 354: show route forwarding-table family fibre-channel Output Fields

Field Name	Field Description
Routing table	Name of the routing table.
Destination	Route destination.
Type	Type of route internal to Junos OS.
RtRef	Route reference count internal to Junos OS.
Next hop Type	Type of next hop internal to Junos OS.
Index	Next-hop index identifier.
NhRef	Number of routes that refer to the next hop.
Netif	Interface used to reach the next hop.

## Sample Output

show route  
forwarding-table  
family fibre-channel

```
user@switch> show route forwarding-table family fibre-channel
Routing table: default.fibre-channel
Fibre Channel:
Destination      Type RtRef Next hop      Type Index NhRef Netif
default          perm   0
0x30000/24       user   0          ucst   674    2 fc-0/0/0.0
0x30001/24       user   0          ucst   675    2 vlan.100
0x30002/24       user   0          ucst   676    2 vlan.100
0x30003/24       user   0          ucst   677    2 vlan.100
0x30004/24       user   0          ucst   678    2 vlan.100
```







## CHAPTER 57

# Troubleshooting

- [Troubleshooting Procedures on page 4795](#)

## Troubleshooting Procedures

---

- [Troubleshooting Dropped FCoE Traffic on page 4795](#)
- [Troubleshooting Fibre Channel Interface Deletion on page 4798](#)
- [Troubleshooting Dropped FIP Traffic on page 4799](#)

## Troubleshooting Dropped FCoE Traffic

**Problem** Fibre Channel over Ethernet (FCoE) traffic for which you want guaranteed delivery is dropped.

**Cause** There are several possible causes of dropped FCoE traffic (the list numbers of the possible causes correspond to the list numbers of the solutions in the *Solution* section.):

1. Priority-based flow control (PFC) is not enabled on the FCoE priority (IEEE 802.1p code point) in both the input and output stanzas of the congestion notification profile.
2. The FCoE traffic is not classified correctly at the ingress interface. FCoE traffic should either use the default **fcoe** forwarding class and classifier configuration (maps the **fcoe** forwarding class to IEEE 802.1p code point 011) or be mapped to a lossless forwarding class and to the code point enabled for PFC on the input and output interfaces.
3. The congestion notification profile that enables PFC on the FCoE priority is not attached to the interface.
4. The forwarding class set (priority group) used for guaranteed delivery traffic does not include the forwarding class used for FCoE traffic.
5. Insufficient bandwidth has been allocated for the FCoE queue or for the forwarding class set to which the FCoE queue belongs.
6. If you are using Junos OS Release 12.2, the **fcoe** forwarding class has been explicitly configured instead of using the default **fcoe** forwarding class configuration (forwarding-class-to-queue mapping).





NOTE: If you are using Junos OS Release 12.2, use the default forwarding-class-to-queue mapping for the lossless fcoe and no-loss forwarding classes. If you explicitly configure the lossless forwarding classes, the traffic mapped to those forwarding classes is treated as lossy (best effort) traffic and does *not* receive lossless treatment.

7. If you are using Junos OS Release 12.3 or later and you are not using the default **fcoe** forwarding class configuration, the forwarding class used for FCoE is not configured with the **no-loss** packet drop attribute. In Junos OS 12.3 or later, explicit forwarding classes configurations must include the **no-loss** packet drop attribute to be treated as lossless forwarding classes.

**Solution** The list numbers of the possible solutions correspond to the list numbers of the causes in the *Cause* section.



1. Check the congestion notification profile (CNP) to see if PFC is enabled on the FCoE priority (the correct IEEE 802.1p code point) on both input and output interfaces. Use the **show class-of-service congestion-notification** operational command to show the code points that are enabled for PFC in each CNP.

If you are using the default configuration, FCoE traffic is mapped to code point 011 (priority 3). In this case, the input stanza of the CNP should show that PFC is enabled on code point 011, and the output stanza should show that priority 011 is mapped to flow control queue 3.

If you explicitly configured a forwarding class for FCoE traffic, ensure that:

- You specified the **no-loss** packet drop attribute in the forwarding class configuration
- The code point mapped to the FCoE forwarding class in the ingress classifier is the code point enabled for PFC in the CNP input stanza
- The code point and output queue used for FCoE traffic are mapped to each other in the CNP output stanza (if you are not using the default priority and queue, you must explicitly configure each output queue that you want to respond to PFC messages)

For example, if you explicitly configure a forwarding class for FCoE traffic that is mapped to output queue 5 and to code point 101 (priority 5), the output of the **show class-of-service congestion-notification** looks like:

```
Name: fcoe_p5_cnp, Index: 12183
Type: Input
Cable Length: 100 m
  Priority  PFC      MRU
  000      Disabled
  001      Disabled
  010      Disabled
  011      Disabled
  100      Disabled
  101      Enabled   2500
  110      Disabled
  111      Disabled
Type: Output
  Priority  Flow-Control-Queues
  101      5
```

2. Use the **show class-of-service classifier type ieee-802.1p** operational command to check if the classifier maps the forwarding class used for FCoE traffic to the correct IEEE 802.1p code point.
3. Ensure that the congestion notification profile and classifier are attached to the correct ingress interface. Use the operational command **show configuration class-of-service interfaces interface-name**.
4. Check that the forwarding class set includes the forwarding class used for FCoE traffic. Use the operational command **show configuration class-of-service forwarding-class-sets** to show the configured priority groups and their forwarding classes.



5. Verify the amount of bandwidth allocated to the queue mapped to the FCoE forwarding class and to the forwarding class set to which the FCoE traffic queue belongs. Use the **show configuration class-of-service schedulers *scheduler-name*** operational command (specify the scheduler for FCoE traffic as the *scheduler-name*) to see the minimum guaranteed bandwidth (**transmit-rate**) and maximum bandwidth (**shaping-rate**) for the queue.

Use the **show configuration class-of-service traffic-control-profiles *traffic-control-profile*** operational command (specify the traffic control profile used for FCoE traffic as the *traffic-control-profile*) to see the minimum guaranteed bandwidth (**guaranteed-rate**) and maximum bandwidth (**shaping-rate**) for the forwarding class set.

6. Delete the explicit FCoE forwarding-class-to-queue mapping so that the system uses the default FCoE forwarding-class-to-queue mapping. Include the **delete forwarding-classes class fcoe queue-num 3** statement at the **[edit class-of-service]** hierarchy level to remove the explicit configuration. The system then uses the default configuration for the FCoE forwarding class and preserves the lossless treatment of FCoE traffic.
7. Use the **show class-of-service forwarding-class** operational command to display the configured forwarding classes. The *No-Loss* column shows whether lossless transport is enabled or disabled for each forwarding class. If the forwarding class used for FCoE traffic is not enabled for lossless transport, include the **no-loss** packet drop attribute in the forwarding class configuration (**set class-of-service forwarding-classes class *fcoe-forwarding-class-name* queue-num *queue-number* no-loss**).

See “[Example: Configuring CoS PFC for FCoE Traffic](#)” on page 4509 for step-by-step instructions on how to configure PFC for FCoE traffic, including classifier, interface, congestion notification profile, PFC, and bandwidth scheduling configuration.

#### Related Documentation

- [show class-of-service congestion-notification on page 5281](#)
- [show class-of-service forwarding-class-set on page 5288](#)
- [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
- [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)
- [Overview of CoS Changes Introduced in Junos OS Release 12.2 on page 4820](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)

## Troubleshooting Fibre Channel Interface Deletion

**Problem** You deleted a Fibre Channel (FC) interface at the **[edit interfaces]** hierarchy level, but the commit check fails so the interface is not deleted.

**Cause** You must first delete the FC interface from the FC fabric on the QFX Series before you can delete the FC interface at the **[edit interfaces]** hierarchy level. You must perform both operations to delete a FC interface.



**Solution** First delete the interface from the FC fabric and then delete the interface from the QFX Series:

1. Delete the FC interface from the FC fabric to which it belongs:

```
[edit]
user@switch# delete fc-fabrics fabric-name interface interface-name
```

For example, to delete the FC interface **fc-0/0/3.0** from an FC fabric named **sanfab1**:

```
[edit]
user@switch# delete fc-fabrics sanfab1 interface fc-0/0/3.0
```

2. Delete the FC interface at the **[edit interfaces]** hierarchy level:

```
[edit]
user@switch: delete interfaces interface-name
```

For example, to delete the interface **fc-0/0/3.0** from the switch:

```
[edit]
user@switch: delete interfaces fc-0/0/3.0
```

- Related Documentation**
- [fc-fabrics on page 4627](#)
  - [interface on page 4637](#)
  - [interfaces on page 2078](#)
  - [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)

## Troubleshooting Dropped FIP Traffic

**Problem** Fibre Channel over Ethernet (FCoE) Initialization Protocol (FIP) traffic such as FIP VLAN discovery and notification frames is dropped on the QFX Series.

**Cause** The interface on which the FIP traffic is dropped does not have a native VLAN configured. FIP VLAN discovery and notification messages are exchanged as untagged packets on the native VLAN. (After the FCoE session with the Fibre Channel switch is established, FCoE traffic uses the FCoE VLAN.)

**Solution** Check to ensure that every 10-Gigabit Ethernet interface that connects to an FCoE device includes a native VLAN. Configure a native VLAN on all 10-Gigabit Ethernet interfaces that connect to FCoE devices.



**NOTE:** Make sure that the native VLAN you are using on the QFX Series is the same native VLAN that the FCoE devices use for Ethernet traffic.

To configure a native VLAN on an interface:

1. Set the interface port mode to **tagged-access** if you have not already done so:

```
[edit]
user@switch# set interfaces interface unit unit family ethernet-switching port-mode
tagged-access
```



For example, to set the port mode to **tagged-access** for interface **xe-0/0/6.0**:

```
[edit]
user@switch# set interfaces xe-0/0/6 unit 0 family ethernet-switching port-mode
tagged-access
```

2. Configure a native VLAN on the interface:

```
[edit]
user@switch# set interfaces interface unit unit family ethernet-switching native-vlan-id
vlan-id
```

For example, to set the native VLAN ID to 1 for interface **xe-0/0/6.0**:

```
[edit]
user@switch# set interfaces xe-0/0/6 unit 0 family ethernet-switching native-vlan-id 1
```

3. Configure the native VLAN if it does not already exist:

```
[edit]
user@switch# set vlans vlan-name vlan-id vlan-id
```

For example, to name the native VLAN **native** and use the VLAN ID 1:

```
[edit]
user@switch# set vlans native vlan-id 1
```

- Related Documentation**
- [interfaces on page 2078](#)
  - [vlans on page 1654](#)
  - [Understanding FIP Functions on page 4408](#)



## PART 18

# Traffic Management

- [Overview on page 4803](#)
- [Configuration on page 4961](#)
- [Administration on page 5265](#)
- [Troubleshooting on page 5417](#)







## CHAPTER 58

# Overview

- [Software Features Overview on page 4803](#)
- [CoS Overview on page 4826](#)

### Software Features Overview

---

- [Overview of Junos OS CoS for the QFX Series on page 4804](#)
- [Overview of CoS Upgrade Requirements \(Junos OS Release 11.1 or 11.2 to a Later Release\) on page 4806](#)
- [Overview of CoS Upgrade Requirements to Junos OS Release 12.2 on page 4808](#)
- [Overview of CoS Upgrade Requirements to Junos OS Release 12.3 on page 4810](#)
- [Overview of CoS Changes Introduced in Junos OS Release 11.3 on page 4812](#)
- [Overview of CoS Changes Introduced in Junos OS Release 12.2 on page 4820](#)
- [Overview of Policers on page 4822](#)



## Overview of Junos OS CoS for the QFX Series

When a network experiences congestion and delay, some packets must be dropped. Junos OS class of service (CoS) enables you to divide traffic into classes and set various levels of throughput and packet loss when congestion occurs. You have greater control over packet loss because you can configure rules tailored to your needs.

You can configure CoS features to provide multiple classes of service for different applications. CoS also allows you to rewrite the Differentiated Services code point (DSCP) or IEEE 802.1p code-point bits of packets leaving an interface, thus allowing you to tailor packets for the network requirements of the remote peers.

CoS provides multiple classes of service for different applications. You can configure multiple forwarding classes for transmitting packets, define which packets are placed into each output queue, schedule the transmission service level for each queue, and manage congestion using a random early detection (RED) algorithm.

In designing CoS applications, you must carefully consider your service needs, and you must thoroughly plan and design your CoS configuration to ensure consistency and interoperability across all platforms in a CoS domain.

Because QFX Series implements CoS in hardware rather than in software, you can experiment with and deploy CoS features without affecting packet forwarding and switching performance.



**NOTE:** CoS policies can be enabled or disabled on each switch interface. Also, each physical and logical interface on the switch can have associated custom CoS rules.

When you change or when you deactivate and then reactivate the class-of-service configuration, the system experiences packet drops because the system momentarily blocks traffic to change the mapping of incoming traffic to input queues.

---

This topic describes:

- [CoS Standards on page 4804](#)
- [How Junos CoS Works on page 4805](#)
- [Default CoS Behavior on page 4806](#)

### CoS Standards

---

The following RFCs define the standards for the QFX Series CoS capabilities:

- RFC 2474, *Definition of the Differentiated Services Field in the IPv4 and IPv6 Headers*
- RFC 2597, *Assured Forwarding PHB Group*
- RFC 2598, *An Expedited Forwarding PHB*
- RFC 2698, *A Two Rate Three Color Marker*



QFX Series also supports the following data center bridging (DCB) standards to provide the CoS (and other characteristics) Fibre Channel requires for transmitting storage traffic over an Ethernet network:

- IEEE 802.1Qbb, priority-based flow control (PFC)
- IEEE 802.1Qaz, enhanced transmission selection (ETS)
- IEEE 802.1AB (LLDP) extension called Data Center Bridging Capability Exchange Protocol (DCBX)

### How Junos CoS Works


Junos CoS works by examining traffic entering at the edge of your network. The switch classifies traffic into defined service groups to provide the special treatment of traffic across the network. For example, you can send voice traffic across certain links and data traffic across other links. In addition, the data traffic streams can be serviced differently along the network path to ensure that higher-paying customers receive better service. As the traffic leaves the network at the far edge, you can reclassify the traffic to meet the policies of the targeted peer by rewriting the DSCP or IEEE 802.1 code-point bits.

To support CoS, you must configure each switch in the network. Generally, each switch examines the packets that enter it to determine their CoS settings. These settings dictate which packets are transmitted first to the next downstream switch. Switches at the edges of the network might be required to alter the CoS settings of the packets that enter the network to classify the packets into the appropriate service groups.

In [Figure 176 on page 4805](#), Switch A is receiving traffic. As each packet enters, Switch A examines the packet's current CoS settings and classifies the traffic into one of the groupings defined on the switch. This definition allows Switch A to prioritize its resources for servicing the traffic streams it receives. Switch A might alter the CoS settings (forwarding class and loss priority) of the packets to better match the defined traffic groups.

When Switch B receives the packets, it examines the CoS settings, determines the appropriate traffic groups, and processes the packet according to those settings. It then transmits the packets to Switch C, which performs the same actions. Switch D also examines the packets and determines the appropriate groups. Because Switch D sits at the far end of the network, it can reclassify (rewrite) the CoS code-point bits of the packets before transmitting them.

**Figure 176: Packet Flow Across the Network**

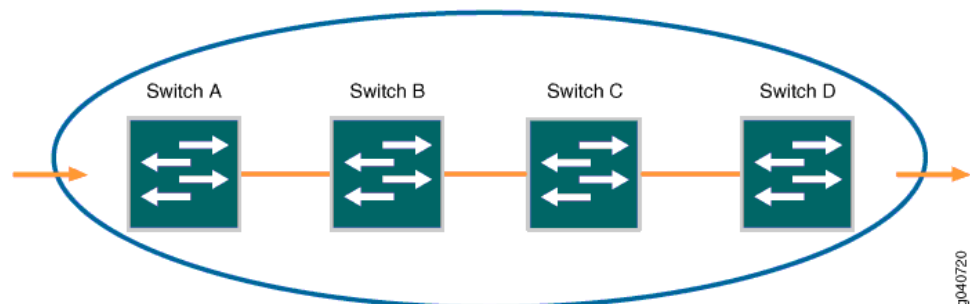



## Default CoS Behavior

---

If you do not configure CoS settings, the software performs some CoS functions to ensure that the system forwards traffic and protocol packets with minimum delay when the network is experiencing congestion. Some CoS settings, such as classifiers, are automatically applied to each logical interface that you configure. Other settings, such as rewrite rules, are applied only if you explicitly associate them with an interface.

### Related Documentation

- [Overview of Policers on page 4096](#)
- [Understanding Junos CoS Components on page 4827](#)
- [Understanding CoS Packet Flow on page 4831](#)
- [Understanding Default CoS Settings on page 4834](#)
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)

## Overview of CoS Upgrade Requirements (Junos OS Release 11.1 or 11.2 to a Later Release)

Before you upgrade to Junos OS Release 11.3, you must deactivate the CoS configuration if the CoS configuration includes any of the following features:

- **excess-rate** option
- **strict-high** or **high** priority queues
- Any of the Junos OS Release 11.1 or 11.2 default multidestination forwarding classes



**CAUTION:** If your CoS configuration contains any of the features listed above and you attempt to upgrade from Junos OS Release 11.1 or 11.2 to a later version without first editing the configuration, the Junos OS might not restart.

Junos OS Release 11.3 and later for QFX Series no longer supports the **excess-rate** statement, the **strict** priority option, or the default multidestination forwarding classes used in Junos OS Release 11.1 and 11.2. In addition, Junos OS Release 11.3 introduces new restrictions on how to configure and use **strict-high** priority queues.

This topic does not describe how to perform the software upgrade procedure. It describes how to deactivate your CoS configuration, edit your CoS configuration, and reactivate your CoS configuration at the appropriate times.

Use the following procedure to upgrade safely from Junos OS Release 11.1 or 11.2 to a later release:

1. Deactivate the CoS configuration *before* you upgrade the software:  

```
user@switch# deactivate class-of-service
```
2. Follow the upgrade procedure to Junos OS Release 11.3 or later software.
3. Make the following changes to the CoS configuration while the CoS configuration is still deactivated:



- Remove the **excess-rate** statement from the CoS configuration if you have used it at the **[edit class-of-service schedulers]** or **[edit class-of-service traffic-control-profiles]** hierarchy level.
  - Remove the **strict-high** and **strict** priority queue configurations if you have used them at the **[edit class-of-service schedulers]** hierarchy level.
  - Remove the default multdestination forwarding classes (**mcast-be**, **mcast-af**, **mcast-ef**, and **mcast-nc**) if you have used them at the **[edit class-of-service schedulers]**, **[edit class-of-service rewrite-rules]**, **[edit class-of-service classifiers]**, **[edit class-of-service scheduler-maps]**, or **[edit class-of-service forwarding-class-sets]** hierarchy level. Alternatively, you can change the mapping of the multdestination traffic to use the new default multdestination forwarding class (**mcast**).
4. If desired, configure **strict-high** priority queues in accordance with the Junos OS Release 11.3 or later configuration rules, and map multdestination traffic to the default multdestination forwarding class (**mcast**).
  5. Activate the CoS configuration:  

```
user@switch# activate class-of-service
```
  6. Commit the CoS configuration:  

```
user@switch# commit
```



**NOTE:** If you configured the **transmit-rate** option for any queues under the **[edit class-of-service schedulers]** hierarchy level, if the rate is configured as an exact rate in Mbps, we recommend that you reconfigure the **transmit-rate** option as a percentage. This is because the scheduler converts exact rates to percentages, and when the exact rate is below 1 Gbps, some granularity may be lost in the conversion. You can avoid this potential issue by specifying the **transmit-rate** option as a percentage.

#### Related Documentation

- [Upgrading Software on QFX3500 and QFX3600 Standalone Switches on page 107](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Understanding CoS Output Queue Schedulers on page 4876](#)
- [Understanding CoS Traffic Control Profiles on page 4886](#)
- [Overview of CoS Upgrade Requirements to Junos OS Release 12.2 on page 4808](#)
- [Overview of CoS Upgrade Requirements to Junos OS Release 12.3 on page 4810](#)
- [Example: Configuring Unicast Classifiers on page 5014](#)
- [Example: Configuring Queue Schedulers on page 5030](#)
- [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)



## Overview of CoS Upgrade Requirements to Junos OS Release 12.2

Before you upgrade to Junos OS Release 12.2, you might need to edit the class-of-service (CoS) configuration, because the way the QFX Series handles lossless forwarding classes has changed in Junos OS Release 12.2.

By default, the **fcoe** and **no-loss** forwarding classes are mapped to output queue 3 and output queue 4, respectively. These are the only two forwarding classes (and the only two queues) that support lossless transport.

In Junos OS Release 12.1 and earlier, explicitly setting the lossless **fcoe** and **no-loss** forwarding classes resulted in the same CoS behavior as using the default configuration. However, in Junos OS Release 12.2, the behavior when you explicitly configure the lossless forwarding classes differs from the behavior when you use the default forwarding classes.



**NOTE:** The default behavior differs from the explicit configuration behavior even if the explicit configuration is exactly the same as the default configuration.

- If you use the default forwarding class configuration for the lossless queues (the configuration does not include explicit setting of the **fcoe** or the **no-loss** forwarding classes), then the **fcoe** and **no-loss** queues behave as lossless queues.

If your CoS configuration does not explicitly configure the **fcoe** and **no-loss** forwarding classes, you can upgrade from Junos OS Release 12.1 to Junos OS Release 12.2, and the behavior of the two lossless queues remains the lossless.

- If your configuration includes statements that explicitly configure the **fcoe** or the **no-loss** forwarding class (using the **[set class-of-service forwarding-classes class class-name queue-num queue-number]** statement), after you upgrade to Junos OS Release 12.2, those queues do *not* receive lossless treatment and behave as lossy (**best-effort**) queues.

If your CoS configuration explicitly configures the **fcoe** and **no-loss** forwarding classes, to retain the lossless behavior of those queues, you need to remove the explicit configuration for these two forwarding classes from the CoS configuration *before* you upgrade.

If you upgrade to Junos OS Release 12.2 and the **fcoe** and **no-loss** forwarding classes are explicitly configured, then those two queues continue to be used, but the traffic is treated as lossy traffic, not lossless traffic. To make the queues for these two forwarding classes lossless, you must delete the explicit forwarding class configuration.



**CAUTION:** If you explicitly configured the **fcoe** or the **no-loss** forwarding class and you upgrade to Junos OS Release 12.2, the system does not return an upgrade error or a commit error, or a generate a syslog message, to notify you that these forwarding classes are no longer lossless. Traffic mapped to



these forwarding classes is not treated as lossless traffic until you remove the explicit forwarding class configuration.

Before you upgrade, delete the **fcoe** and **no-loss** forwarding classes from the explicit configuration to preserve the lossless behavior of traffic mapped to these forwarding classes.

- To delete the explicit **fcoe** forwarding class configuration:

```
[edit]
user@switch# delete class-of-service forwarding-class class fcoe queue-num 3
user@switch# commit
```

- To delete the explicit **no-loss** forwarding class configuration:

```
[edit]
user@switch# delete class-of-service forwarding-class class no-loss queue-num 4
user@switch# commit
```



**NOTE:** If you try to delete these forwarding classes and they have not been explicitly configured on the system, the system returns the message warning: **statement not found**. This simply means that there is no explicit configuration to delete and does not change the lossless behavior of the **fcoe** and **no-loss** forwarding classes.

After you delete the explicit configuration for the **fcoe** and **no-loss** forwarding classes, traffic mapped to those forwarding classes retains its lossless behavior after the upgrade to Junos OS Release 12.2.

#### Related Documentation

- [Overview of CoS Upgrade Requirements \(Junos OS Release 11.1 or 11.2 to a Later Release\) on page 34](#)
- [Overview of CoS Upgrade Requirements to Junos OS Release 12.3 on page 4810](#)
- [Overview of CoS Changes Introduced in Junos OS Release 11.3 on page 4812](#)
- [Understanding CoS Forwarding Classes on page 4860](#)
- [Example: Configuring Forwarding Classes on page 5024](#)



## Overview of CoS Upgrade Requirements to Junos OS Release 12.3

Before you upgrade to Junos OS Release 12.3, you might need to edit the class-of-service (CoS) configuration, because the way the QFX Series handles lossless forwarding classes has changed in Junos OS Release 12.3.

By default, the *fcoe* and *no-loss* forwarding classes are mapped to output queue 3 and output queue 4, respectively, and to IEEE 802.1p priority 3 (code point 011) and priority 4 (code point 100), respectively. These are the only two forwarding classes (and the only two queues) that support lossless transport in the default configuration.

If you use the default CoS configuration, you do not need to edit the CoS configuration after upgrading to Junos OS Release 12.3 because the default CoS configuration is backward compatible.

Junos OS Release 12.3 increases the support for lossless forwarding classes (priorities) from two forwarding classes to six forwarding classes. To support configuring lossless forwarding classes, Junos OS Release 12.3 introduces a new option to forwarding class configuration: the *no-loss* packet drop attribute.



**NOTE:** The new *no-loss* packet drop attribute and the previously existing *no-loss* default forwarding class have the same name, but they are not the same. You can use the *no-loss* packet drop attribute on any unicast forwarding class.

If you explicitly configure any lossless forwarding class (including explicitly configuring the default *fcoe* and *no-loss* forwarding classes), you *must* specify the *no-loss* packet drop attribute to obtain lossless behavior. If you do not explicitly configure the *fcoe* and *no-loss* forwarding classes, those forwarding classes remain lossless.

The addition of the *no-loss* packet drop attribute to forwarding class configuration means that when you upgrade from an earlier release to Junos OS Release 12.3, the new software might not preserve the lossless forwarding class configuration of the *fcoe* and *no-loss* forwarding classes.

If you used the default forwarding class configuration for the *fcoe* and *no-loss* forwarding classes, the CoS configuration is backward compatible. You do not have to do anything to preserve the lossless behavior of traffic that uses those forwarding classes when you upgrade to Junos OS Release 12.3. (This is because the default configuration of these two forwarding classes includes the *no-loss* packet drop attribute.)

However, if you explicitly configured the *fcoe* or the *no-loss* forwarding class by including the **set forwarding-classes class forwarding-class-name queue-num queue-number** at the **[edit class-of-service]** hierarchy level, then those forwarding classes are no longer lossless, they are lossy. In Junos OS Release 12.3 and later, you must include the *no-loss* packet drop attribute in any explicit forwarding class configuration to configure a lossless forwarding class.



For example, before Junos OS Release 12.3, the following explicit configuration resulted in a lossless forwarding class:

```
user@switch# set class-of-service forwarding-classes class fcoe queue-num 3
```

However, in Junos OS Release 12.3, this configuration is lossy because it does not include the no-loss packet drop attribute. To preserve lossless behavior, after upgrading to Junos OS Release 12.3, you need to add the no-loss drop attribute:

```
user@switch# set class-of-service forwarding-classes class fcoe queue-num 3 no-loss
```

Alternatively, you can delete the explicit configuration before you upgrade to Junos OS Release 12.3 so that the system uses the default forwarding class, which is lossless:

```
user@switch# delete class-of-service forwarding-classes class fcoe queue-num 3
```



**NOTE:** The explicit configuration of other forwarding classes does not affect the lossless (or lossy) state of the fcoe and no-loss forwarding classes, because only the fcoe and no-loss forwarding classes are lossless forwarding classes before Junos OS Release 12.3. For example, if you explicitly configured the best-effort forwarding class but you used the default fcoe and no-loss forwarding classes in Junos OS Release 12.2, then when you upgrade to Junos OS Release 12.3, the fcoe and no-loss forwarding classes are still lossless (and the best-effort forwarding class retains its explicit configuration).



**NOTE:** To achieve lossless behavior for the traffic belonging to any forwarding class, you must also enable PFC on the IEEE 802.1p priority mapped to the forwarding class and ensure that DCBX exchanges the protocol TLVs for the application with the connected peer.

#### Related Documentation

- [Overview of CoS Upgrade Requirements \(Junos OS Release 11.1 or 11.2 to a Later Release\) on page 34](#)
- [Overview of CoS Upgrade Requirements to Junos OS Release 12.2 on page 4808](#)



## Overview of CoS Changes Introduced in Junos OS Release 11.3

Junos OS Release 11.3 introduces many changes to class-of-service (CoS) functionality and to the CoS default values. This overview summarizes the changes, which other documents describe in detail.



**NOTE:** Some of the CoS changes are not backward compatible with Junos OS Releases 11.1 and 11.2. “[Overview of CoS Upgrade Requirements \(Junos OS Release 11.1 or 11.2 to a Later Release\)](#)” on page 34 describes how to upgrade to Junos OS Release 11.3 if you have configured CoS on your QFX3500 switch.

This topic describes the following changes in CoS default values and behavior:

- [CoS Default Value Changes on page 4812](#)
- [Queue Priority Configuration Changes on page 4817](#)
- [Minimum Guaranteed Bandwidth \(Transmit Rate and Guaranteed Rate\) Changes on page 4818](#)
- [Excess Rate Statement Disabled on page 4818](#)
- [Queue Scheduling \(Low and Strict-High Priority Queues\) on page 4819](#)
- [Multidestination Traffic Changes on page 4819](#)

### CoS Default Value Changes

The default values of the following CoS components have changed in Junos OS Release 11.3:

- [Default Forwarding Classes on page 4812](#)
- [Default IEEE 802.1p Unicast Classifiers on page 4814](#)
- [Default IEEE 802.1p Multidestination Classifiers on page 4815](#)
- [Default Scheduler on page 4816](#)

#### **Default Forwarding Classes**

In Junos OS Releases 11.1 and 11.2, there were eight default forwarding classes, four unicast default forwarding classes and four default multidestination (multicast, broadcast, and destination lookup fail) forwarding classes. [Table 355 on page 4812](#) shows the old default forwarding classes and default queue mapping:

**Table 355: Junos OS Release 11.1 and 11.2 Default Forwarding Classes and Queue Mapping**

Default Forwarding Class	Description	Default Queue Mapping
best-effort (be)	Unicast best-effort traffic	0
no-loss	Unicast guaranteed delivery for TCP no-loss traffic	2



**Table 355: Junos OS Release 11.1 and 11.2 Default Forwarding Classes and Queue Mapping (*continued*)**

Default Forwarding Class	Description	Default Queue Mapping
fcoe	Unicast guaranteed delivery for FCoE traffic	3
network-control	Unicast network control traffic	7
multicast-best-effort (mcast-be)	Multidestination best-effort traffic	8
multicast-expedited-forwarding (mcast-ef)	Multidestination low-loss, low-latency traffic	9
multicast-assured-forwarding (mcast-af)	Multidestination assured forwarding traffic	10
multicast-network-control (mcast-nc)	Multidestination network control traffic	11

Junos OS Release 11.3 changes the default forwarding classes and queue mapping in the following ways:

- Instead of eight default forwarding classes, there are five default forwarding classes.
- The same four unicast default forwarding classes remain valid, but the default queue mapping of the no-loss forwarding class has changed from queue 2 to queue 4.
- There is now only one default multidestination forwarding class instead of four default multidestination forwarding classes. All multidestination traffic is assigned by default to the default multidestination forwarding class.



**NOTE:** The rest of the forwarding class characteristics remain the same as before. For example, the QFX Series still supports 12 forwarding classes and 12 output queues. You can still configure a total of eight unicast forwarding classes and four multidestination forwarding classes. The unicast queues are still queues 0 through 7 and the multidestination queues are still queues 8 through 11. Unicast traffic must be mapped to unicast queues, and multidestination traffic must be mapped to multidestination queues. The queue to which a forwarding class is mapped determines whether the forwarding class is unicast or multidestination.

[Table 356 on page 4813](#) shows the default forwarding classes and queue mapping in Junos OS 11.3 and later:

**Table 356: Junos OS Release 11.3 Default Forwarding Classes and Queue Mapping**

Default Forwarding Class	Description	Default Queue Mapping
best-effort (be)	Best-effort traffic class	0
fcoe	Guaranteed delivery for FCoE traffic	3



**Table 356: Junos OS Release 11.3 Default Forwarding Classes and Queue Mapping (*continued*)**

Default Forwarding Class	Description	Default Queue Mapping
no-loss	Guaranteed delivery for TCP no-loss traffic	4
network-control (nc)	Network control traffic	7
mcast	Multicast traffic	8

***Default IEEE 802.1p Unicast Classifiers***

In Junos OS Release 11.1 and 11.2, there were default unicast classifiers only for best-effort and network-control traffic, as shown in [Table 357 on page 4814](#):

**Table 357: Junos OS Release 11.1 and 11.2 Default IEEE 802.1 Unicast Classifiers**

Code Point	Forwarding Class	Loss Priority
be (000)	best-effort	low
be1 (001)	best-effort	low
ef (010)	best-effort	low
ef1 (011)	best-effort	low
af11 (100)	best-effort	low
af12 (101)	best-effort	low
nc1 (110)	network-control	low
nc2 (111)	network-control	low

Junos OS Release 11.3 introduces new default classifiers for FCoE and no-loss traffic, replacing the best-effort classifiers mapped to IEEE 802.1p code points 011 and 100, respectively, as shown in [Table 358 on page 4814](#):

**Table 358: Junos OS Release 11.3 Default IEEE 802.1 Unicast Classifiers**

Code Point	Forwarding Class	Loss Priority
be (000)	best-effort	low
be1 (001)	best-effort	low
ef (010)	best-effort	low
ef1 (011)	fcoe	low
af11 (100)	no-loss	low



**Table 358: Junos OS Release 11.3 Default IEEE 802.1 Unicast Classifiers (*continued*)**

Code Point	Forwarding Class	Loss Priority
af12 (101)	best-effort	low
nc1 (110)	network-control	low
nc2 (111)	network-control	low

***Default IEEE 802.1p Multidestination Classifiers***

In Junos OS Release 11.1 and 11.2, there were default multidestination classifiers for best-effort and network-control traffic, as shown in [Table 359 on page 4815](#):

**Table 359: Junos OS Release 11.1 and 11.2 Default IEEE 802.1 Multidestination Classifiers**

Code Point	Forwarding Class	Loss Priority
be (000)	mcast-be	low
be1 (001)	mcast-be	low
ef (010)	mcast-be	low
ef1 (011)	mcast-be	low
af11 (100)	mcast-be	low
af12 (101)	mcast-be	low
nc1 (110)	mcast-nc	low
nc2 (111)	mcast-nc	low

Junos OS Release 11.3 replaces the best-effort and network-control multidestination classifiers and maps all IEEE 802.1p code points to the new default multidestination forwarding class, as shown in [Table 360 on page 4815](#):

**Table 360: Junos OS Release 11.3 Default IEEE 802.1 Multidestination Classifiers**

Code Point	Forwarding Class	Loss Priority
be (000)	mcast	low
be1 (001)	mcast	low
ef (010)	mcast	low
ef1 (011)	mcast	low
af11 (100)	mcast	low



Table 360: Junos OS Release 11.3 Default IEEE 802.1 Multidestination Classifiers (*continued*)

Code Point	Forwarding Class	Loss Priority
af12 (101)	mcast	low
nc1 (110)	mcast	low
nc2 (111)	mcast	low

**Default Scheduler**

In Junos OS Release 11.1 and 11.2, there were four default schedulers:

- Unicast best effort
- Unicast network control
- Multidestination best effort
- Multidestination network control

[Table 361 on page 4816](#) shows the default scheduler configuration in Junos OS Release 11.1 and 11.2:

Table 361: Junos OS Release 11.1 and 11.2 Default Schedulers

Default Scheduler and Queue Number	Guaranteed Rate (Minimum Bandwidth)	Shaping Rate (Maximum Bandwidth)	Excess Rate (Extra Bandwidth Sharing)	Priority
Best-effort scheduler (queue 0)	75%	None	25%	Low
Network-control scheduler (queue 7)	5%	None	25%	Low
Best-effort multidestination scheduler (queue 8)	15%	None	25%	Low
Network-control multidestination scheduler (queue 11)	5%	None	25%	Low

Junos OS Release 11.3 replaces the four old classifiers with five new classifiers:

- Unicast best effort
- FCoE
- No loss
- Unicast network control
- Multidestination



There are now four different default unicast classifiers to provide default CoS for lossless queues (FCoE and no-loss traffic). Because there is only one default multidestination forwarding class in Junos OS Release 11.3, there is only one default multidestination classifier for all multidestination traffic. Also, the excess rate default value is removed from the scheduler because the **excess-rate** statement is no longer supported, as described elsewhere in this document. [Table 362 on page 4817](#) shows the default scheduler configuration in Junos OS Releases 11.3:

Table 362: Default Schedulers

Default Scheduler and Queue Number	Guaranteed Rate (Minimum Bandwidth)	Shaping Rate (Maximum Bandwidth)	Excess Bandwidth Sharing	Priority
Best-effort scheduler (queue 0)	5%	None	5%	Low
FCoE scheduler (queue 3)	35%	None	35%	Low
No-loss scheduler (queue 4)	35%	None	35%	Low
Network-control scheduler (queue 7)	5%	None	5%	Low
Multidestination scheduler (queue 8)	20%	None	20%	Low



**NOTE:** The minimum guaranteed bandwidth rate also determines the amount of excess (extra) bandwidth that the queue can share. Extra bandwidth is allocated to queues in proportion to the minimum guaranteed bandwidth rate of each queue.

### Queue Priority Configuration Changes

In Junos OS Release 11.1 and 11.2, you could configure strict-high priority queues with a guaranteed minimum bandwidth and configure forwarding class sets (priority groups) with a mix of low priority and strict-high priority queues. In Junos OS Release 11.3 and later, these configurations are invalid, and several other changes have also been implemented:

- Priority configuration in Junos OS Release 11.1 and 11.2 provided three priority levels: **strict-high**, **high**, and **low**. In Junos OS Release 11.3, the **high** priority option has been removed. Only the **strict-high** and **low** priority options are valid in Release 11.3.
- Minimum guaranteed bandwidth (transmit rate) is not allowed on strict-high priority queues. Minimum guaranteed bandwidth (guaranteed rate) is not allowed on forwarding class sets that contain strict-high priority queues.



- You cannot configure a multidestination queue as a strict-high priority queue. You cannot configure a queue as a strict-high priority queue if it belongs to the multidestination forwarding class set.
- Only one forwarding class set can contain strict-high priority queues. If you want to configure a strict-high priority queue, you must also configure a separate forwarding class set for the strict-high priority queue. A forwarding class set cannot contain a mixture of low priority and strict-high priority queues.

The rest of the queue priority characteristics remain the same as before. For example, you can configure only one queue as a strict-high priority queue.



**NOTE:** If you have configured strict-high or high priority queues in Junos OS Release 11.1 or 11.2, the changes in Release 11.3 are not backward compatible. Please read [“Overview of CoS Upgrade Requirements \(Junos OS Release 11.1 or 11.2 to a Later Release\)”](#) on page 34 before you upgrade to Release 11.3.

---

### Minimum Guaranteed Bandwidth (Transmit Rate and Guaranteed Rate) Changes

The following restrictions have been placed on minimum guaranteed bandwidth configuration in Junos OS Release 11.3:

- You cannot configure a guaranteed minimum bandwidth (transmit rate) for strict-high priority queues.
- Queues (forwarding classes) with a configured transmit rate cannot be included in a forwarding class set that has strict-high priority queues.
- You cannot configure a guaranteed minimum bandwidth (guaranteed rate) for forwarding class sets that include strict-high priority queues.
- For transmit rates below 1 Gbps, we recommend that you configure the transmit rate as a percentage instead of as a fixed rate. This is because the system converts fixed rates into percentages and may round small fixed rates to a lower percentage. For example, a fixed rate of 350 Mbps is rounded down to 3 percent instead of 3.5 percent.

---

### Excess Rate Statement Disabled

The **excess-rate** statement has been disabled in Junos OS Release 11.3. Excess rate was used to specify the way extra bandwidth was shared among queues.

The **excess-rate** statement was used at the **[edit class-of-service schedulers]** hierarchy level for queue scheduling configuration and at the **[edit class-of-service traffic-control-profiles]** hierarchy level for forwarding class set scheduling configuration.

In Junos OS Release 11.3, extra bandwidth sharing among queues is proportional to the minimum guaranteed bandwidth (transmit rate) of the queue. Extra bandwidth sharing among forwarding class sets (priority groups) is proportional to the minimum guaranteed bandwidth (guaranteed rate) of the forwarding class set.





**NOTE:** If you have configured the excess-rate option in Junos OS Release 11.1 or 11.2, the changes in Release 11.3 are not backward compatible. Please read [“Overview of CoS Upgrade Requirements \(Junos OS Release 11.1 or 11.2 to a Later Release\)”](#) on page 34 before you upgrade to Release 11.3.

### Queue Scheduling (Low and Strict-High Priority Queues)

In Junos OS Release 11.1 and 11.2, if you configured a guaranteed minimum bandwidth (transmit rate) for low-priority queues, the low-priority queues received their guaranteed minimum bandwidth from the same bandwidth pool as the strict-high priority queue, using round-robin scheduling. Until the minimum bandwidth requirements of all queues were met, the strict-high priority queue and low-priority queues that had a guaranteed minimum bandwidth were treated equally. After the minimum bandwidth requirements of all queues were met, the strict-high priority queue received as much of the leftover bandwidth as it needed. This meant that the only way to ensure that a strict-high priority queue received all of the bandwidth it needed was not to configure a guaranteed minimum bandwidth for other queues.

In Junos OS Release 11.3 and later, queue scheduling has changed so that queues receive bandwidth in the following sequence:

1. The strict-high priority queue receives all of the bandwidth it needs before any other queue is served. The strict-high priority queue can take the full port bandwidth if necessary and can starve other queues on the port.
2. The guaranteed minimum bandwidth (transmit rate) of low-priority queues is served until the minimum is met or the queues are empty.
3. All other low-priority queues and needs that exceed the minimum bandwidth are served.

### Multidestination Traffic Changes

The changes to the default forwarding classes and classifiers affects multidestination traffic handling in Junos OS Release 11.3:

- The number of default multidestination forwarding classes has been reduced from four default multidestination forwarding classes in Junos OS Release 11.1 and 11.2 to one default multidestination in Release 11.3 (see [Table 356 on page 4813](#)).
- The default classifier configuration for multidestination traffic has changed so that there is now one default classifier for all multidestination traffic (see [Table 360 on page 4815](#)).
- By default, all IEEE 802.1p code points map to the default multidestination forwarding class.



- The default scheduler for multidestination traffic has changed so that there is now one default scheduler for all multidestination traffic (see [Table 362 on page 4817](#)).
- You cannot configure multidestination queues as strict-high priority queues and you cannot include strict-high priority queues in a forwarding class set that contains multidestination queues.

**Related Documentation**

- [Overview of CoS Upgrade Requirements \(Junos OS Release 11.1 or 11.2 to a Later Release\) on page 34](#)
- [Overview of CoS Changes Introduced in Junos OS Release 12.2 on page 4820](#)
- [Understanding Default CoS Settings on page 4834](#)
- [Understanding Default CoS Scheduling and Classification on page 4866](#)
- [Understanding CoS Output Queue Schedulers on page 4876](#)

## Overview of CoS Changes Introduced in Junos OS Release 12.2

Junos OS Release 12.2 introduces some changes to class-of-service (CoS) functionality and to the CoS default values. This overview summarizes the changes, which other documents describe in detail.

This topic describes the following changes in CoS default values and behavior:

- [Lossless Forwarding Classes \(fcoe and no-loss\) on page 4820](#)
- [Default MTU for Headroom Buffer Calculation for Lossless Forwarding Classes on page 4821](#)
- [CoS for Layer 3 Physical Interfaces on page 4821](#)
- [DSCP IPv6 Classifiers and Rewrite Rules on page 4821](#)

### Lossless Forwarding Classes (fcoe and no-loss)

---

The way the QFX Series handles lossless forwarding classes (the **fcoe** and **no-loss** forwarding classes) changes in Junos OS Release 12.2. In Junos OS Release 12.2 and in earlier releases, by default, the **fcoe** and **no-loss** forwarding classes are mapped to output queue 3 and output queue 4, respectively. These are the only two forwarding classes (and the only two queues) that support lossless transport.

In earlier releases, explicitly setting the lossless **fcoe** and **no-loss** forwarding classes resulted in the same CoS behavior as using the default configuration. However, in Junos OS Release 12.2, the behavior when you explicitly configure the lossless forwarding classes differs from the behavior when you use the default forwarding classes.



**NOTE:** The default behavior differs from the explicit configuration behavior even if the explicit configuration is exactly the same as the default configuration.

---



If you use the default forwarding class settings for the lossless queues (the configuration does not include explicit setting of the **fcoe** or the **no-loss** forwarding classes), then the **fcoe** and **no-loss** queues behave as lossless queues. When you upgrade to Junos OS Release 12.2, traffic assigned to the **fcoe** and **no-loss** queues continues to be treated as lossless traffic.

If your configuration explicitly sets the **fcoe** or the **no-loss** forwarding class (**set class-of-service forwarding-classes class class-name queue-num queue-number**), after you upgrade to Junos OS Release 12.2, those queues do *not* receive lossless treatment and behave as lossy (**best-effort**) queues. To retain lossless treatment of the **fcoe** and **no-loss** queues, delete the explicit lossless forwarding class configuration before you upgrade to Junos OS Release 12.2.



**CAUTION:** If you explicitly configured the **fcoe** or the **no-loss** forwarding class, and you upgrade to Junos OS Release 12.2, the system does not return an upgrade error or a commit error, or a generate a syslog message, to notify you that these forwarding classes are no longer lossless. Traffic mapped to these forwarding classes is not treated as lossless traffic until you remove the explicit forwarding class configuration.

### Default MTU for Headroom Buffer Calculation for Lossless Forwarding Classes

The default maximum transmission unit (MTU) the system uses for buffer headroom calculation is 2500 bytes for traffic classified into the **fcoe** forwarding class or the **no-loss** forwarding class.

In Junos OS Release 12.2, the default MTU used for buffer headroom calculation for the **fcoe** and **no-loss** forwarding classes remains 2500 bytes. However, if the buffer is filled, in Junos OS Release 12.2 you might experience commit failures.

### CoS for Layer 3 Physical Interfaces

Before Junos OS Release 12.2, the QFX Series supported only Layer 2 CoS. Junos OS Release 12.2 introduces CoS support for Layer 3 traffic at the physical interface level.

If a physical Layer 3 interface has at least one logical interface configured on it, you can configure Layer 3 CoS for the physical interface. The CoS configured on the physical interface applies to all of the logical Layer 3 interfaces on that physical interface. The system does not support Layer 3 CoS configuration on individual Layer 3 logical interfaces.

### DSCP IPv6 Classifiers and Rewrite Rules

Junos OS Release 12.2 introduces support for DSCP IPv6 classifiers and rewrite rules. The existing DSCP IP default classifier is now also the DSCP IPv6 default classifier.

You can configure and apply DSCP IPv6 classifiers and DSCP IPv6 rewrite rules to Layer 2 logical interfaces and to Layer 3 physical interfaces.





**NOTE:** DSCP IPv6 classifiers are not supported for multidestination (multicast, broadcast, and destination lookup fail) traffic.

**Related  
Documentation**

- [Overview of CoS Upgrade Requirements to Junos OS Release 12.2 on page 4808](#)
- [Overview of CoS Changes Introduced in Junos OS Release 11.3 on page 4812](#)
- [Understanding Default CoS Settings on page 4834](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces on page 4851](#)

## Overview of Policers

A switch polices traffic by limiting the input or output transmission rate of a class of traffic according to user-defined criteria. Policing (or rate-limiting) traffic allows you to control the maximum rate of traffic sent or received on an interface and to provide multiple priority levels or classes of service.

- [Policer Overview on page 4822](#)
- [Policer Types on page 4823](#)
- [Policer Actions on page 4824](#)
- [Policer Colors on page 4824](#)
- [Suggested Naming Convention for Policers on page 4825](#)
- [Policer Counters on page 4825](#)
- [Policer Algorithms on page 4825](#)
- [How Many Policers are Supported? on page 4826](#)


### Policer Overview

You use policers to apply limits to traffic flow and set consequences for packets that exceed these limits—usually applying a higher loss priority—so that if packets encounter downstream congestion, they can be discarded first. Policers apply only to unicast packets.

Policers provide two functions: metering and marking. A policer meters (measures) each packet against traffic rates and burst sizes that you configure. It then passes the packet and the metering result to the marker, which assigns a packet loss priority that corresponds to the metering result. [Figure 147 on page 4097](#) illustrates this process.



Figure 177: Flow of Tricolor Marking Policer Operation

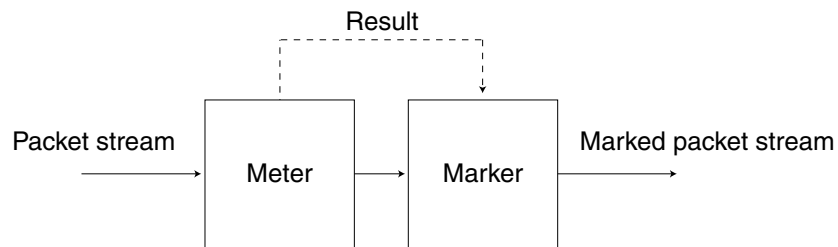

9017049

After you name and configure a policer, you use it by specifying it as an action in one or more firewall filters.

### Policer Types

A switch supports three types of policers:

- **Single-rate two-color marker**—A two-color policer (or “policer” when used without qualification) meters the traffic stream and classifies packets into two categories of packet loss priority (PLP) according to a configured bandwidth and burst-size limit. You can mark packets that exceed the bandwidth and burst-size limit with a specified PLP or simply discard them.

You can specify this type of policer in an ingress or egress firewall.



**NOTE:** A two-color policer is most useful for metering traffic at the port (physical interface) level.

- **Single-rate three-color marker**—This type of policer is defined in RFC 2697, *A Single Rate Three Color Marker*, as part of an assured forwarding (AF) per-hop-behavior (PHB) classification system for a Differentiated Services (DiffServ) environment. This type of policer meters traffic based on one rate—the configured committed information rate (CIR) as well as the committed burst size (CBS) and the excess burst size (EBS). The CIR specifies the average rate at which bits are admitted to the switch. The CBS specifies the usual burst size in bytes and the EBS specifies the maximum burst size in bytes. The EBS must be greater than or equal to the CBS, and neither can be 0.

You can specify this type of policer in an ingress or egress firewall.



**NOTE:** A single-rate three-color marker (TCM) is most useful when a service is structured according to packet length and not peak arrival rate.

- **Two-rate three-color marker**—This type of policer is defined in RFC 2698, *A Two Rate Three Color Marker*, as part of an assured forwarding per-hop-behavior classification system for a Differentiated Services environment. This type of policer meters traffic based on two rates—the CIR and peak information rate (PIR) along with their associated burst sizes, the CBS and peak burst size (PBS). The PIR specifies the maximum rate at which bits are admitted to the network and must be greater than or equal to the CIR.



You can specify this type of policer in an ingress or egress firewall.



**NOTE:** A two-rate three-color policer is most useful when a service is structured according to arrival rates and not necessarily packet length.

See [Table 282 on page 4098](#) for information about how metering results are applied for each of these policer types.

### Policer Actions

Policer actions are implicit or explicit and vary by policer type. *Implicit* means that Junos OS assigns the loss priority automatically. [Table 282 on page 4098](#) describes the policer actions.

**Table 363: Policer Actions**

Policer	Marking	Implicit Action	Configurable Action
Single-rate two-color	Green (conforming)	Assign low loss priority	None
	Red (nonconforming)	None	Discard
Single-rate three-color	Green (conforming)	Assign low loss priority	None
	Yellow (above the CIR and CBS)	Assign medium-high loss priority	None
	Red (above the EBS)	Assign high loss priority	Discard
Two-rate three-color	Green (conforming)	Assign low loss priority	None
	Yellow (above the CIR and CBS)	Assign medium-high loss priority	None
	Red (above the PIR and PBS)	Assign high loss priority	Discard



**NOTE:** If you specify a policer in an egress firewall filter, the only supported action is discard.

### Policer Colors

Single-rate and two-rate three-color policers can operate in two modes:



- **Color-blind**—In color-blind mode, the three-color policer assumes that all packets examined have not been previously marked or metered. In other words, the three-color policer is “blind” to any previous coloring a packet might have had.
- **Color-aware**—In color-aware mode, the three-color policer assumes that all packets examined have been previously marked or metered. In other words, the three-color policer is “aware” of the previous coloring a packet might have had. In color-aware mode, the three-color policer can increase the PLP of a packet but cannot decrease it. For example, if a color-aware three-color policer meters a packet with a medium PLP marking, it can raise the PLP level to high but cannot reduce the PLP level to low.

### Suggested Naming Convention for Policers

We recommend that you use the naming convention ***policertypeTCM#-color type*** when configuring three-color policers and ***policer#*** when configuring two-color policers. TCM stands for three-color marker. Because policers can be numerous and must be applied correctly to work, a simple naming convention makes it easier to apply the policers properly. For example, the first single-rate, color-aware three-color policer configured would be named **srTCM1-ca**. The second two-rate, color-blind three-color configured would be named **trTCM2-cb**. The elements of this naming convention are explained below:

- sr (single-rate)
- tr (two-rate)
- TCM (tricolor marking)
- 1 or 2 (number of marker)
- ca (color-aware)
- cb (color-blind)

### Policer Counters

Each policer that you configure includes an implicit counter that counts the number of packets that exceed the rate limits that are specified for the policer. If you use the same policer in multiple terms—either within the same filter or in different filters—the implicit counter counts all the packets that are policed in all of these terms. If you want to obtain separate packet counts for each term, use these options:

- Configure a unique policer for each term.
- Configure only one policer, but use a unique, explicit counter in each term.

### Policer Algorithms

Policing uses the *token-bucket algorithm*, which enforces a limit on average bandwidth while allowing bursts up to a specified maximum value. It offers more flexibility than the *leaky bucket algorithm* in allowing a certain amount of bursty traffic before it starts discarding packets.



### How Many Policers are Supported?

---

You can configure and commit the following numbers of policers on QFX3500 and QFX3600 devices when they are operating as standalone switches:

- Two-color policers used in ingress firewall filters: 768
- Three-color policers used in ingress firewall filters: 768
- Two-color policers used in egress firewall filters: 510
- Three-color policers used in egress firewall filters: 255

#### Related Documentation

- [Understanding Color-Blind Mode for Single-Rate Tricolor Marking on page 4100](#)
- [Understanding Color-Blind Mode for Two-Rate Tricolor Marking on page 4103](#)
- [Understanding Color-Aware Mode for Single-Rate Tricolor Marking on page 4101](#)
- [Understanding Color-Aware Mode for Two-Rate Tricolor Marking on page 4103](#)
- [Configuring Two-Color and Three-Color Policers to Control Traffic Rates on page 4183](#)

### CoS Overview

---

- [Understanding Junos CoS Components on page 4827](#)
- [Understanding CoS Packet Flow on page 4831](#)
- [CoS Inputs and Outputs Overview on page 4833](#)
- [Understanding Default CoS Settings on page 4834](#)
- [Understanding Host Inbound Traffic Classification on page 4841](#)
- [Understanding Host Routing Engine Outbound Traffic Queues and Defaults on page 4842](#)
- [Understanding CoS Code-Point Aliases on page 4844](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces on page 4851](#)
- [Understanding CoS Forwarding Classes on page 4860](#)
- [Understanding CoS Forwarding Class Sets \(Priority Groups\) on page 4865](#)
- [Understanding Default CoS Scheduling and Classification on page 4866](#)
- [Understanding CoS Hierarchical Port Scheduling \(ETS\) on page 4872](#)
- [Understanding CoS Output Queue Schedulers on page 4876](#)
- [Understanding CoS Priority Group Scheduling on page 4883](#)
- [Understanding CoS Traffic Control Profiles on page 4886](#)
- [Understanding CoS Priority Group and Queue Guaranteed Rates \(Minimum Bandwidth\) on page 4887](#)
- [Understanding CoS Priority Group Shaping and Queue Shaping \(Maximum Bandwidth\) on page 4890](#)
- [Understanding CoS Scheduling Behavior and Configuration Considerations on page 4892](#)



- [Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896](#)
- [Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 4911](#)
- [Understanding CoS Buffer Configuration on page 4914](#)
- [Understanding CoS Tail-Drop Profiles on page 4929](#)
- [Understanding CoS Rewrite Rules on page 4933](#)
- [Understanding DCB Features and Requirements on page 4934](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4938](#)
- [Understanding DCBX on page 4946](#)
- [Understanding DCBX Application Protocol TLV Exchange on page 4955](#)

## Understanding Junos CoS Components

This topic describes the Junos operating system (OS) class-of-service (CoS) components for the QFX Series:

- [Code-Point Aliases on page 4827](#)
- [Policers on page 4827](#)
- [Classifiers on page 4827](#)
- [Forwarding Classes on page 4828](#)
- [Forwarding Class Sets on page 4828](#)
- [Flow Control \(Ethernet PAUSE and Priority-Based Flow Control\) on page 4829](#)
- [Tail-Drop Profiles on page 4829](#)
- [Schedulers on page 4830](#)
- [Rewrite Rules on page 4830](#)

---

### Code-Point Aliases

A code-point alias assigns a name to a pattern of code-point bits. You can use this name instead of the bit pattern when you configure other CoS components such as classifiers and rewrite rules.

---

### Policers

Policers limit traffic of a certain class to a specified bandwidth and burst size. Packets exceeding the policer limits can be discarded, or can be assigned to a different forwarding class, a different loss priority, or both. You define policers with filters that you can associate with input interfaces.

---

### Classifiers

Packet classification associates incoming packets with a particular CoS servicing level. In Junos OS, *classifiers* associate packets with a forwarding class and loss priority and assign packets to output queues based on the associated forwarding class. Junos OS supports two general types of classifiers:

- Behavior aggregate (BA) or CoS value traffic classifiers—Examine the CoS value in the packet header. The value in this single field determines the CoS settings applied to the



packet. BA classifiers allow you to set the forwarding class and loss priority of a packet based on the Differentiated Services code point (DSCP) value or IEEE 802.1p value.

- Multifield traffic classifiers—Examine multiple fields in the packet, such as source and destination addresses and source and destination port numbers of the packet. With multifield classifiers, you set the forwarding class and loss priority of a packet based on firewall filter rules.

You can create unicast classifiers for unicast traffic and multideestination classifiers for multicast, broadcast, and destination lookup fail traffic. You cannot assign unicast traffic and multideestination traffic to the same classifier.

You can apply unicast classifiers to one or more interfaces. Multideestination classifiers apply to all of the switch interfaces and cannot be applied to individual interfaces.

### Forwarding Classes

---

Forwarding classes group packets for transmission and CoS. You assign each packet to an output queue based on the packet's forwarding class. Forwarding classes affect the forwarding, scheduling, and rewrite marking policies applied to packets as they transit the switch.

The switch provides five default forwarding classes:

- fcoe—Fibre Channel over Ethernet traffic
- no-loss—Lossless traffic
- be—Best-effort traffic
- nc—Network control traffic
- mcast—Multicast traffic

The switch supports a total of 12 forwarding classes (8 unicast forwarding classes and 4 multicast forwarding classes), which provide flexibility in classifying traffic.

### Forwarding Class Sets

---

You can group forwarding classes (output queues) into *forwarding class sets* in order to apply CoS to groups of traffic that require similar treatment. Forwarding class sets map traffic into priority groups to support enhanced transmission selection (ETS, described in IEEE 802.1Qaz).

You can configure up to three unicast forwarding class sets and one multicast forwarding class set. For example, you can configure different forwarding class sets to apply CoS to unicast groups of local area network (LAN) traffic, storage area network (SAN) traffic, and high-performance computing (HPC) traffic, and configure another group for multicast traffic.

Within each forwarding class set, you can configure special CoS treatment for the traffic mapped to each individual queue. This provides the ability to configure CoS in a two-tier hierarchical manner. At the forwarding class set tier, you configure CoS for groups of traffic using a *traffic control profile*. At the queue tier, you configure CoS for individual



output queues within a forwarding class set using a *scheduler* that you map to a queue (forwarding class) using a *scheduler map*.

### Flow Control (Ethernet PAUSE and Priority-Based Flow Control)

Ethernet PAUSE (described in IEEE 802.3X) is a link-level flow control mechanism. During periods of network congestion, Ethernet PAUSE stops all traffic on a full-duplex Ethernet link for a period of time specified in the PAUSE message.

Priority-based flow control (PFC, described in IEEE 802.1Qbb) is part of the IEEE data center bridging (DCB) specifications for creating a lossless Ethernet environment to transport loss-sensitive flows such as Fibre Channel over Ethernet (FCoE) traffic.

PFC is a link-level flow control mechanism similar to Ethernet PAUSE. However, Ethernet PAUSE stops all traffic on a link for a period of time. PFC decouples the pause function from the physical link and divides the traffic on the link into eight priorities (3-bit IEEE 802.1p code points). You can think of the eight priorities as eight “lanes” of traffic. You can apply pause selectively to the traffic on any priority without pausing the traffic on other priorities on the same link.

The granularity that PFC provides allows you to configure different levels of CoS for different types of traffic on the link. You can create lossless lanes for traffic such as FCoE, LAN backup, or management, while using standard frame-drop methods of congestion management for IP traffic on the same link.



**NOTE:** If you transport FCoE traffic, you must enable PFC on the priority assigned to FCoE traffic (usually code point 011 on interfaces that carry FCoE traffic).

### Tail-Drop Profiles

A tail-drop profile (drop profile) defines parameters that enable the network to drop packets during periods of congestion. A drop profile defines the conditions under which packets of different loss priorities drop, by determining the probability of dropping a packet for each loss priority when output queues become congested. Drop profiles essentially set a value for a level of queue fullness—when the queue fills to the level of the queue fullness value, packets drop.

You can associate different drop profiles with different loss priorities to set the probability of dropping packets. You can apply a drop profile for each loss priority to a forwarding class (output queue) by applying a drop profile to a scheduler, and then mapping the scheduler to a forwarding class using a scheduler map. When the queue mapped to the forwarding class experiences congestion, the drop profile determines the level of packet drop for traffic of each loss priority in that queue.

Loss priority affects the scheduling of a packet without affecting the packet’s relative ordering. Typically you mark packets exceeding a particular service level with a high loss priority.



## Schedulers

---

Each switch interface has multiple queues assigned to store packets. The switch determines which queue to service based on a particular method of scheduling. This process often involves determining the sequence in which different types of packets should be transmitted.

You can define the priority (**priority**), minimum bandwidth (**transmit-rate**), maximum bandwidth (**shaping-rate**), and tail-drop profiles to be applied to a particular queue for packet transmission. Extra bandwidth is shared among queues in proportion to the minimum guaranteed bandwidth of each queue.

A scheduler map associates a specified forwarding class with a scheduler configuration. You can associate up to four user-defined scheduler maps with the interfaces.

## Rewrite Rules

---

A *rewrite rule* sets the appropriate CoS bits in the outgoing packet. This allows the next downstream device to classify the packet into the appropriate service group. Rewriting (marking) outbound packets is useful when the switch is at the border of a network and must change the CoS values to meet the policies of the targeted peer.



**NOTE:** Ingress firewall filters can also rewrite forwarding class and loss priority values.

---

### Related Documentation

- [Understanding CoS Packet Flow on page 4831](#)
- [Understanding CoS Code-Point Aliases on page 4844](#)
- [Overview of Policers on page 4096](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Understanding CoS Forwarding Classes on page 4860](#)
- [Understanding CoS Forwarding Class Sets \(Priority Groups\) on page 4865](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)
- [Understanding CoS Tail-Drop Profiles on page 4929](#)
- [Understanding CoS Output Queue Schedulers on page 4876](#)
- [Understanding CoS Rewrite Rules on page 4933](#)
- [Understanding DCB Features and Requirements on page 4389](#)



## Understanding CoS Packet Flow

When a packet traverses a QFX Series Node device, the Node device provides the appropriate level of service to the packet using either default class of service (CoS) settings or CoS settings that you configure. On ingress ports, the Node device classifies packets into appropriate forwarding classes and assigns a loss priority to the packets. On egress ports, the Node device applies packet scheduling and (if you have configured them) rewrite rules to re-mark packets.

On the QFX Series, you can configure CoS on Layer 2 logical interfaces, and you can configure CoS on Layer 3 physical interfaces if you have defined at least one logical interface on the Layer 3 physical interface. You cannot configure CoS on Layer 2 physical interfaces and Layer 3 logical interfaces.

For Layer 2 traffic, either use the default CoS settings or configure CoS on each logical interface. You can apply different CoS settings to different Layer 2 logical interfaces.

For Layer 3 traffic, either use the default CoS settings or configure CoS on the physical interface (not on the logical unit). The QFX Series uses the CoS applied on the physical Layer 3 interface for all logical Layer 3 interfaces configured on the physical Layer 3 interface.

The QFX Series applies to CoS to packets as they flow through the system:

- An interface has one or more classifiers of different types applied to it (configure this at the **[edit class-of-service interfaces]** hierarchy level). The classifier types are based on the portion of the incoming packet that the classifier examines (IEEE 802.1p code point bits or DSCP code point bits).
- When a packet enters an ingress port, the classifier assigns the packet to a forwarding class and a loss priority based on the code point bits of the packet (configure this at the **[edit class-of-service classifiers]** hierarchy level).
- The QFX Series assigns each forwarding class to an output queue (configure this at the **[edit class-of-service forwarding-classes]** hierarchy level).
- Input (and output) policers meter traffic and can change the forwarding class and loss priority if a traffic flow exceeds its service level.
- A scheduler map is applied to each interface. When a packet exits an egress port, the scheduler map controls how it is treated (configure this at the **[edit class-of-service interfaces]** hierarchy level). A scheduler map assigns schedulers to forwarding classes (configure this at the **[edit class-of-service scheduler-maps]** hierarchy level).
- A scheduler defines how traffic is treated at the egress interface output queue (configure this at the **[edit class-of-service schedulers]** hierarchy level). You control the transmit rate, shaping rate, priority, and drop profile of each forwarding class by mapping schedulers to forwarding classes in scheduler maps, then applying scheduler maps to interfaces.



- A drop-profile defines how aggressively to drop packets that are mapped to a particular scheduler (configure this at the **[edit class-of-service drop-profiles]** hierarchy level).
- A rewrite rule takes effect as the packet leaves an interface that has a rewrite rule configured (configure this at the **[edit class-of-service rewrite-rules]** hierarchy level). The rewrite rule writes information to the packet (for example, a rewrite rule can re-mark the code point bits of outgoing traffic) according to the forwarding class and loss priority of the packet.

Figure 178 on page 4832 is a high-level flow diagram of how packets from various sources enter QFX Series interfaces, are classified at the ingress, and then scheduled (provided bandwidth) at the egress queues.

Figure 178: CoS Classifier, Queues, and Scheduler


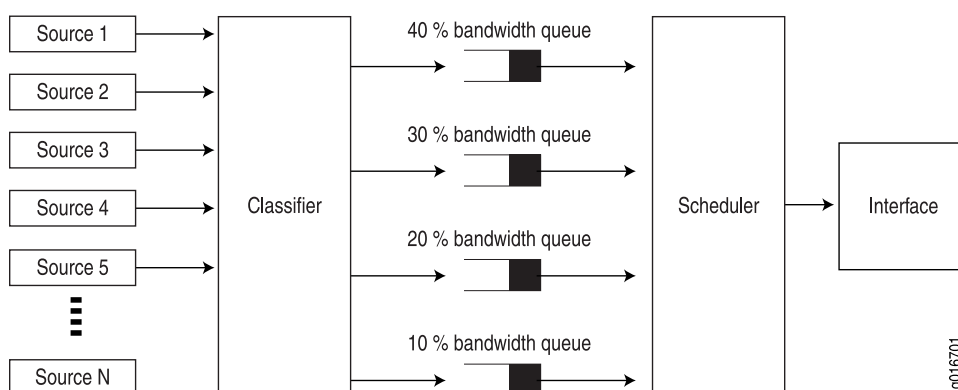


Figure 179 on page 4832 shows the packet flow through the CoS components that you can configure.

Figure 179: Packet Flow Through Configurable CoS Components



The middle box ("Forwarding Class and Loss Priority") represents two values that you can use on ingress and egress interfaces. The system uses these values for classifying traffic on ingress interfaces and for rewrite rule re-marking on egress interfaces. Each outer box represents a process component. The components in the top row apply to incoming packets. The components in the bottom row apply to outgoing packets.

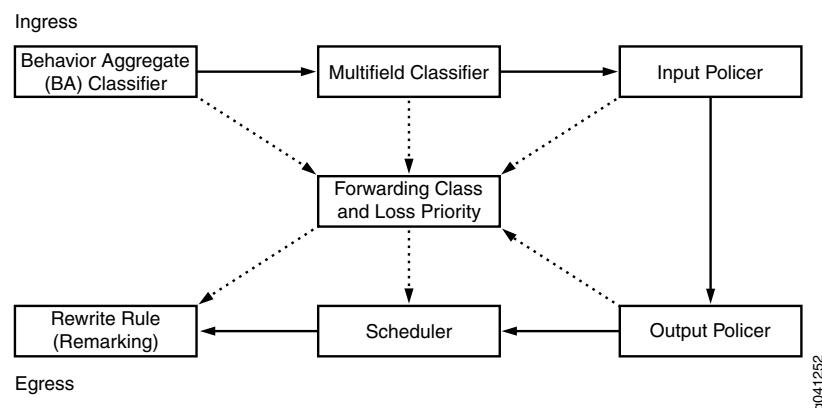

The solid-line arrows show the direction of packet flow from ingress to egress. The dotted-line arrows show inputs and outputs or show settings and actions based on those settings.

For example, the BA classifier sets the forwarding class and loss priority of incoming packets, so the forwarding class and loss priority are outputs of the classifier and the arrow points away from the classifier. The scheduler receives the forwarding class and loss priority settings, and queues the outgoing packets based on those settings, so the arrow points toward the scheduler.

#### Related Documentation

- [Understanding CoS Classifiers on page 4846](#)
- [Overview of Policers on page 4096](#)
- [Understanding CoS Forwarding Classes on page 4860](#)
- [Understanding Default CoS Scheduling and Classification on page 4866](#)
- [Understanding CoS Hierarchical Port Scheduling \(ETS\) on page 4872](#)
- [Understanding CoS Output Queue Schedulers on page 4876](#)
- [Understanding CoS Priority Group Scheduling on page 4883](#)
- [Understanding CoS Tail-Drop Profiles on page 4929](#)
- [Understanding CoS Rewrite Rules on page 4933](#)

## CoS Inputs and Outputs Overview

Some CoS components map one set of values to another set of values. Each mapping contains one or more inputs and one or more outputs. When you configure a mapping, you set the outputs for a given set of inputs, as shown in [Table 364 on page 4833](#).

**Table 364: CoS Mappings—Inputs and Outputs**

CoS Mappings	Inputs	Outputs	Comments
<a href="#">classifiers</a>	<a href="#">code-points</a>	<a href="#">forwarding-class</a> , <a href="#">loss-priority</a>	The map sets the forwarding class and packet loss priority (PLP) for a specific set of code points.
<a href="#">drop-profile-map</a>	<a href="#">loss-priority</a> , <a href="#">protocol</a>	<a href="#">drop-profile</a>	The map sets the drop profile for a specific PLP and protocol type.
<a href="#">rewrite-rules</a>	<a href="#">loss-priority</a> , <a href="#">forwarding-class</a>	<a href="#">code-points</a>	The map sets the code points for a specific forwarding class and PLP.
<a href="#">rewrite-value (Fibre Channel Interfaces)</a>	<a href="#">forwarding-class</a>	<a href="#">code-point</a>	The map sets the code point for the forwarding class specified in the fixed classifier attached to the native Fibre Channel (NP_Port) interface.

#### Related Documentation

- [Understanding CoS Packet Flow on page 4831](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Example: Configuring Unicast Classifiers on page 5014](#)



- [Example: Configuring Multidestination \(Multicast, Broadcast, DLF\) Classifiers on page 5017](#)
- [Example: Configuring Forwarding Classes on page 5024](#)
- [Configuring CoS Drop Profile Maps on page 5137](#)
- [Defining CoS Rewrite Rules on page 5155](#)

## Understanding Default CoS Settings

If you do not configure CoS settings on the QFX Series, Junos OS performs some CoS functions to ensure that traffic and protocol packets are forwarded with minimum delay when the network experiences congestion. Some default mappings are automatically applied to each logical interface that you configure.

You can display default CoS settings by issuing the **show class-of-service** operational mode command.

This topic describes the default configurations for the following CoS components:

- [Default Forwarding Classes and Queue Mapping on page 4834](#)
- [Default Forwarding Class Sets \(Priority Groups\) on page 4835](#)
- [Default Code-Point Aliases on page 4835](#)
- [Default Classifiers on page 4837](#)
- [Default Rewrite Rules on page 4840](#)
- [Default Drop Profile on page 4840](#)
- [Default Schedulers on page 4840](#)
- [Default Scheduler Maps on page 4840](#)
- [Default Shared Buffer Configuration on page 4841](#)

### Default Forwarding Classes and Queue Mapping

Table 365 on page 4834 shows the default mapping of the default forwarding classes to queues and packet drop attribute.

**Table 365: Default Forwarding Classes and Queue Mapping**

Default Forwarding Class	Description	Default Queue Mapping	Packet Drop Attribute
best-effort (be)	Best-effort traffic class (priority 0, IEEE 802.1p code point 000)	0	drop
fcoe	Guaranteed delivery for FCoE traffic (priority 3, IEEE 802.1p code point 011)	3	no-loss
no-loss	Guaranteed delivery for TCP no-loss traffic (priority 4, IEEE 802.1p code point 100)	4	no-loss



Table 365: Default Forwarding Classes and Queue Mapping (*continued*)

Default Forwarding Class	Description	Default Queue Mapping	Packet Drop Attribute
network-control (nc)	Network control traffic (priority 7, IEEE 802.1p code point 111)	7	drop
mcast	Multidestination traffic	8	drop

**NOTE:** You cannot configure multidestination forwarding classes as no-loss (lossless) traffic classes.

### Default Forwarding Class Sets (Priority Groups)

If you do not explicitly configure forwarding class sets, the system automatically creates a default forwarding class set that contains all of the forwarding classes on the switch. The system assigns 100 percent of the port output bandwidth to the default forwarding class set.

Ingress traffic is classified based on the default classifier settings. The forwarding classes (queues) in the default forwarding class set receive bandwidth based on the default scheduler settings. Forwarding classes that are not part of the default scheduler receive no bandwidth.

The default forwarding class set is transparent. It does not appear in the configuration and is used for Data Center Bridging Capability Exchange (DCBX) protocol advertisement.

### Default Code-Point Aliases

Table 366 on page 4835 shows the default mapping of code-point aliases to IEEE code points.

Table 366: Default IEEE 802.1 Code-Point Aliases

CoS Value Types	Mapping
be	000
be1	001
ef	010
ef1	011
af11	100
af12	101
nc1	110



Table 366: Default IEEE 802.1 Code-Point Aliases (*continued*)

CoS Value Types	Mapping
nc2	111

[Table 367 on page 4836](#) shows the default mapping of code-point aliases to DSCP and DSCP IPv6 code points.

Table 367: Default DSCP and DCSP IPv6 Code-Point Aliases

CoS Value Types	Mapping
ef	101110
af11	001010
af12	001100
af13	001110
af21	010010
af22	010100
af23	010110
af31	011010
af32	011100
af33	011110
af41	100010
af42	100100
af43	100110
be	000000
cs1	001000
cs2	010000
cs3	011000
cs4	100000
cs5	101000



Table 367: Default DSCP and DCSP IPv6 Code-Point Aliases (*continued*)

CoS Value Types	Mapping
nc1	110000
nc2	111000

### Default Classifiers

The QFX Series applies default unicast IEEE 802.1, unicast DSCP, and multidestination classifiers to each interface that does not have explicitly configured classifiers. If you explicitly configure one type of classifier but not other types of classifiers, the system uses only the configured classifier and does not use default classifiers for other types of traffic. There are two different default unicast IEEE 802.1 classifiers, a trusted classifier for ports that are in trunk mode or tagged-access mode, and an untrusted classifier for ports that are in access mode.

[Table 368 on page 4837](#) shows the default mapping of IEEE 802.1 code-point values to unicast forwarding classes and loss priorities for ports in trunk mode or tagged-access mode.

Table 368: Default IEEE 802.1 Unicast Classifiers for Ports in Trunk Mode or Tagged Access Mode (Trusted Classifier)

Code Point	Forwarding Class	Loss Priority
be (000)	best-effort	low
be1 (001)	best-effort	low
ef (010)	best-effort	low
ef1 (011)	fcoe	low
af11 (100)	no-loss	low
af12 (101)	best-effort	low
nc1 (110)	network-control	low
nc2 (111)	network-control	low

[Table 369 on page 4838](#) shows the default mapping of IEEE 802.1p code-point values to unicast forwarding classes and loss priorities for ports in access mode (all incoming traffic is mapped to best-effort forwarding classes).



**Table 369: Default IEEE 802.1 Unicast Classifiers for Ports in Access Mode (Untrusted Classifier)**

Code Point	Forwarding Class	Loss Priority
000	best-effort	low
001	best-effort	low
010	best-effort	low
011	best-effort	low
100	best-effort	low
101	best-effort	low
110	best-effort	low
111	best-effort	low

[Table 370 on page 4838](#) shows the default mapping of IEEE 802.1 code-point values to multidestination (multicast, broadcast, and destination lookup fail traffic) forwarding classes and loss priorities.

**Table 370: Default IEEE 802.1 Multidestination Classifiers**

Code Point	Forwarding Class	Loss Priority
be (000)	mcast	low
be1 (001)	mcast	low
ef (010)	mcast	low
ef1 (011)	mcast	low
af11 (100)	mcast	low
af12 (101)	mcast	low
nc1 (110)	mcast	low
nc2 (111)	mcast	low

[Table 371 on page 4839](#) shows the default mapping of DSCP code-point values to unicast forwarding classes and loss priorities for DSCP IP and DCSP IPv6.



Table 371: Default DSCP IP and IPv6 Unicast Classifiers

Code Point	Forwarding Class	Loss Priority
ef (101110)	best-effort	low
af11 (001010)	best-effort	low
af12 (001100)	best-effort	low
af13 (001110)	best-effort	low
af21 (010010)	best-effort	low
af22 (010100)	best-effort	low
af23 (010110)	best-effort	low
af31 (011010)	best-effort	low
af32 (011100)	best-effort	low
af33 (011110)	best-effort	low
af41 (100010)	best-effort	low
af42 (100100)	best-effort	low
af43 (100110)	best-effort	low
be (000000)	best-effort	low
cs1 (001000)	best-effort	low
cs2 (010000)	best-effort	low
cs3 (011000)	best-effort	low
cs4 (100000)	best-effort	low
cs5 (101000)	best-effort	low
nc1 (110000)	network-control	low
nc2 (111000)	network-control	low



**NOTE:** There are no default DSCP IP or IPv6 classifiers for multidestination traffic. DSCP IPv6 classifiers are not supported for multidestination traffic.



### Default Rewrite Rules

There are no default rewrite rules. If you do not explicitly configure rewrite rules, the switch does not reclassify egress traffic.

### Default Drop Profile

Table 372 on page 4840 shows the default drop profile configuration.

**Table 372: Default Drop Profile**

Fill Level	Drop Probability
100	100

### Default Schedulers

Table 373 on page 4840 shows the default scheduler configuration.

**Table 373: Default Schedulers**

Default Scheduler and Queue Number	Guaranteed Rate (Minimum Bandwidth)	Shaping Rate (Maximum Bandwidth)	Excess Bandwidth Sharing	Priority	Buffer Size
Best-effort scheduler (queue 0)	5%	None	5%	low	5%
FCoE scheduler (queue 3)	35%	None	35%	low	35%
No-loss scheduler (queue 4)	35%	None	35%	low	35%
Network-control scheduler (queue 7)	5%	None	5%	low	5%
Multidestination scheduler (queue 8)	20%	None	20%	low	20%



**NOTE:** The minimum guaranteed bandwidth rate also determines the amount of excess (extra) bandwidth that the queue can share. Extra bandwidth is allocated to queues in proportion to the minimum guaranteed bandwidth rate of each queue.

### Default Scheduler Maps

Table 374 on page 4840 shows the default mapping of forwarding classes to schedulers.

**Table 374: Default Scheduler Maps**

Forwarding Class	Scheduler
best-effort	Default BE scheduler



Table 374: Default Scheduler Maps (*continued*)

Forwarding Class	Scheduler
fcoe	Default FCoE scheduler
no-loss	No-loss scheduler
network-control	Default network-control scheduler
mcast-be	Default multidestination scheduler

### Default Shared Buffer Configuration

Table [Table 375 on page 4841](#) and [Table 376 on page 4841](#) show the default shared buffer allocations:

Table 375: Default Ingress Shared Buffer Configuration

Total Shared Ingress Buffer	Lossless Buffer	Lossless-Headroom Buffer	Lossy Buffer
100%	9%	45%	46%

Table 376: Default Egress Shared Buffer Configuration

Total Shared Egress Buffer	Lossless Buffer	Lossy Buffer	Multicast Buffer
100%	50%	31%	19%

### Related Documentation

- [Overview of Junos OS CoS for the QFX Series on page 4804](#)
- [Understanding Junos CoS Components on page 4827](#)
- [Understanding Default CoS Scheduling and Classification on page 4866](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces on page 4851](#)
- [Understanding CoS Code-Point Aliases on page 4844](#)
- [Understanding CoS Forwarding Classes on page 4860](#)
- [Understanding CoS Rewrite Rules on page 4933](#)
- [Understanding CoS Output Queue Schedulers on page 4876](#)
- [Understanding CoS Tail-Drop Profiles on page 4929](#)

## Understanding Host Inbound Traffic Classification

The destination address of traffic that enters the switch can be an external device such as another switch, a router, or a server, or the destination can be the host (the switch



Routing Engine or CPU). When the destination is an external device, the DSCP and IEEE 802.1p code-point bits of incoming traffic are preserved as the traffic travels through the switch to the egress port. At the egress port, the code-point bits are either preserved when the packets are sent to the next hop or they are rewritten according to the rewrite rule attached to the egress interface.

When the destination of incoming traffic is the host, DSCP bits are preserved. However, IEEE 802.1p bits are not preserved. The IEEE 802.1p bits of traffic destined for the host are set to zero (0). This does not affect system behavior because the switch prioritizes traffic destined for the host based on the protocol type. For example, the switch gives a higher priority to BPDU traffic than to ping traffic.

## Understanding Host Routing Engine Outbound Traffic Queues and Defaults

The host Routing Engine and CPU generate outbound traffic that is transmitted using different protocols. You cannot configure a classifier to map different types of outbound traffic that the host generates to forwarding classes (queues). The traffic that the host generates is assigned to forwarding classes by default as shown in [Table 377 on page 4843](#).

If you want to separate host outbound traffic from other traffic or if you want to assign that traffic to a particular queue, you can configure a single forwarding class for all traffic that the host generates. If you configure a forwarding class for outbound host traffic, that forwarding class is used globally for all traffic generated by the host. (That is, the host outbound traffic is mapped to the selected queue on all egress interfaces.) Configuring a forwarding class for host outbound traffic does not affect transit or incoming traffic.

Whether you use the default host outbound traffic forwarding class configuration or configure a forwarding class for all host outbound traffic, the configuration applies to all Layer 2 and Layer 3 protocols and to all application-level traffic such as FTP and ping operations.

If you configure a queue for host outbound traffic, the queue must be properly configured on all interfaces.



**NOTE:** Fibre Channel over Ethernet (FCoE) Initialization Protocol (FIP) packets generated by the CPU are always transmitted on the `fcoe` queue (queue 3), even if you configure a queue for host outbound traffic. This helps to ensure lossless behavior for FCoE traffic. QFabric systems classify FIP control packets into the same traffic class (`fcoe`) across the Interconnect device (`fabric`) and the egress Node device.

---

By default, traffic generated by the host is sent to the best effort queue (queue 0) or to the network control queue (queue 7). [Table 377 on page 4843](#) lists the default host traffic to output queue mapping.



Table 377: Routing Engine Protocol Default Queue Mapping

Routing Engine Protocol	Default Queue Mapping
Address Resolution Protocol (ARP) reply	Queue 0
ARP request	Queue 0
Border Gateway Protocol (BGP)	Queue 0
BGP TCP Retransmission	Queue 7
Fibre Channel over Ethernet (FCoE) Initialization Protocol (FIP)	Queue 3
File Transfer Protocol (FTP)	Queue 0
Internet Control Message Protocol (ICMP) reply	Queue 0
ICMP request	Queue 0
Internet Group Management Protocol (IGMP) query	Queue 7
IGMP report	Queue 0
Link Aggregation Control Protocol (LACP)	Queue 7
Open Shortest Path First (OSPF) hello	Queue 7
OSPF protocol data unit (PDU)	Queue 7
OSPF link state advertisements (LSAs)	Queue 7
Protocol Independent Multicast (PIM)	Queue 7
PIM hello	Queue 7
Simple Network Management Protocol (SNMP)	Queue 0
Secure Shell (SSH)	Queue 0
Telnet	Queue 0
Virtual Router Redundancy Protocol (VRRP)	Queue 7
VLAN Spanning Tree Protocol (VSTP)	Queue 7
<b>xnm-clear-text</b>	Queue 0
<b>xnm-ssl</b>	Queue 0



- Related Documentation**
- [Understanding CoS Forwarding Classes on page 4860](#)
  - [Changing the Host Outbound Traffic Default Queue Mapping on page 5143](#)
  - [Example: Configuring Forwarding Classes on page 5024](#)

## Understanding CoS Code-Point Aliases

A code-point alias assigns a name to a pattern of code-point bits. You can use this name instead of the bit pattern when you configure other CoS components such as classifiers, drop-profile maps, and rewrite rules.

Behavior aggregate classifiers use class-of-service (CoS) values such as Differentiated Services code points (DSCPs) and IEEE 802.1 bits to associate incoming packets with a particular CoS servicing level. You can assign a meaningful name or alias to the CoS values and use that alias instead of bits when configuring CoS components. These aliases are not part of the specifications but are well known through usage. For example, the alias for DSCP 101110 is widely accepted as ef (expedited forwarding).

When you configure classes and define classifiers, you can refer to the markers by alias names. You can configure alias names for user-defined classifiers. If the value of an alias changes, it alters the behavior of any classifier that references it.

You can configure code-point aliases for the following type of CoS markers:

- dscp or dscp-ipv6—Handles incoming IP and IPv6 packets.
- ieee-802.1—Handles Layer 2 CoS.

This topic covers:

- [Default Code-Point Aliases on page 4844](#)

### Default Code-Point Aliases

[Table 378 on page 4844](#) shows the default mapping of code-point aliases to IEEE code points.

**Table 378: Default IEEE 802.1 Code-Point Aliases**

CoS Value Types	Mapping
be	000
be1	001
ef	010
ef1	011
af11	100
af12	101



**Table 378: Default IEEE 802.1 Code-Point Aliases (*continued*)**

CoS Value Types	Mapping
nc1	110
nc2	111

Table 379 on page 4845 shows the default mapping of code-point aliases to DSCP and DSCP IPv6 code points.

**Table 379: Default DSCP and DSCP IPv6 Code-Point Aliases**

CoS Value Types	Mapping
ef	101110
af11	001010
af12	001100
af13	001110
af21	010010
af22	010100
af23	010110
af31	011010
af32	011100
af33	011110
af41	100010
af42	100100
af43	100110
be	000000
cs1	001000
cs2	010000
cs3	011000
cs4	100000



Table 379: Default DSCP and DSCP IPv6 Code-Point Aliases (*continued*)

CoS Value Types	Mapping
cs5	101000
nc1	110000
nc2	111000

**Related Documentation**

- [Understanding Junos CoS Components on page 4827](#)
- [Defining CoS Code-Point Aliases on page 5133](#)

## Understanding CoS Classifiers

Packet classification associates incoming packets with a particular class-of-service (CoS) servicing level. Classifiers associate packets with a forwarding class and a loss priority, and assign packets to output queues based on the associated forwarding class. There are three general types of classifiers:

- Behavior aggregate (BA) classifiers—DSCP and DSCP IPv6 classify IP and IPv6 traffic, and IEEE 802.1p classifiers classify all other traffic.
  - Fixed classifiers—Fixed classifiers classify all ingress traffic on a physical interface into one forwarding class, regardless of the CoS bits in the packet header.
  - Multifield (MF) classifiers—MF classifiers classify traffic based on more than one field in the packet header and take precedence over BA and fixed classifiers.
- [Interfaces and Output Queues on page 4846](#)
  - [Behavior Aggregate Classifiers on page 4847](#)
  - [Fixed Classifiers on Ethernet Interfaces on page 4850](#)
  - [Fixed Classifiers on Native Fibre Channel Interfaces \(NP\\_Ports\) on page 4850](#)
  - [Multifield Classifiers on page 4850](#)
  - [Packet Classification for Routed VLAN Interfaces \(RVIs\) on page 4851](#)

### Interfaces and Output Queues

On Gigabit Ethernet interfaces, 10-Gigabit Ethernet interfaces, and link aggregation (LAG) interfaces, you can apply classifiers to Layer 2 logical interfaces and to Layer 3 physical interfaces if the Layer 3 physical interface has at least one defined logical interface. Classifiers applied to Layer 3 physical interfaces are used on all logical interfaces on that physical interface. “[Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces](#)” on page 4851 describes the interaction between classifiers and interfaces in greater detail.

You can configure both a BA classifier and an MF classifier on an interface. If you do this, the BA classification is performed first and then the MF classification is performed. If the



two classification results conflict, the MF classification result overrides the BA classification result.

You cannot configure a fixed classifier and a BA classifier on the same interface.

You can configure both a DSCP or a DSCP IPv6 classifier and an IEEE 802.1p classifier on the same interface. IP traffic uses the DSCP or DSCP IPv6 classifier. All other traffic uses the IEEE classifier. You can configure only one DSCP classifier on a physical interface (either one DSCP classifier or one DSCP IPv6 classifier, but not both).

You can create unicast BA classifiers for unicast traffic and multicast BA classifiers for multdestination traffic, which includes multicast, broadcast, and destination lookup fail (DLF) traffic. You cannot assign unicast traffic and multdestination traffic to the same BA classifier.

On each interface, the switch has separate output queues for unicast traffic and for multdestination traffic:

- The switch supports 12 output queues, with 8 queues dedicated to unicast traffic and 4 queues dedicated to multdestination traffic.
- Queues 0 through 7 are unicast traffic queues. You can apply only unicast BA classifiers to unicast queues. A unicast BA classifier should contain only forwarding classes that are mapped to unicast queues.
- Queues 8 through 11 are multdestination traffic queues. You can apply only multdestination BA classifiers to multdestination queues. A multdestination BA classifier should contain only forwarding classes that are mapped to multdestination queues.

You can apply unicast classifiers to one or more interfaces. Multdestination classifiers apply to all of the switch interfaces and cannot be applied to individual interfaces. Use the DSCP multdestination classifier for both IP and IPv6 multdestination traffic. The DSCP IPv6 classifier is not supported for multdestination traffic.

### Behavior Aggregate Classifiers

The behavior aggregate classifier maps a class-of-service (CoS) value to a forwarding class and loss priority. The forwarding class determines the output queue. A scheduler uses the loss priority to control packet discard during periods of congestion by associating different drop profiles with different loss priorities.

The switch supports two types of BA classifiers:

- Differentiated Services Code Point (DSCP) for IP DiffServ (IP and IPv6)
- IEEE 802.1p CoS bits

BA classifiers are based on fixed-length fields, which makes them computationally more efficient than MF classifiers. Therefore, core devices, which handle high traffic volumes, are normally configured to perform BA classification.

Unicast and multicast traffic cannot share the same classifier. You can map unicast traffic and multicast traffic to the same classifier CoS value, but the unicast traffic must



belong to a unicast classifier and the multicast traffic must belong to a multidestination classifier.

### **Default Behavior Aggregate Classification**

Juniper Networks Junos OS automatically assigns implicit default classifiers to all logical interfaces based on the type of interface. [Table 380 on page 4848](#) lists different types of interfaces and the corresponding implicit default BA classifiers.

**Table 380: Default BA Classification**

Type of Interface	Default BA Classification
Layer 2 interface in trunk mode or in tagged-access mode	ieee8021p-default
Layer 3 interface	dscp-default
Layer 2 interface in access mode	ieee8021p-untrusted



**NOTE:** There are default BA classifiers for the best-effort, fcoe, no-loss, network-control, and mcast forwarding classes.

When you explicitly associate a unicast classifier with a logical interface, you are overriding the default unicast classifier with the explicit unicast classifier.



**NOTE:** You can apply only one classifier of each type, DSCP and IEEE 802.1p, to a Layer 2 interface. If both types of classifiers are present, DSCP classifiers take precedence over IEEE 802.1p classifiers.

### **Importing a Classifier**

You can use any existing classifier, including the default classifiers, as the basis for defining a new classifier. You accomplish this using the **import** statement.

The imported classifier is used as a template and is not modified. The modifications you make become part of a new classifier (and a new template) identified by the name of the new classifier. Whenever you commit a configuration that assigns a new class-name and loss-priority value to a code-point alias or set of bits, it replaces that entry in the new classifier template. As a result, you must explicitly specify every CoS value in every designation that requires modification.

### **Multidestination Classifiers**

Multidestination classifiers are applied to all interfaces and cannot be applied to individual interfaces. You can configure both a DSCP multidestination classifier and an IEEE multidestination classifier. IP and IPv6 traffic use the DSCP classifier, and all other traffic uses the IEEE classifier.



DSCP IPv6 multdestination classifiers are not supported, so IPv6 traffic uses the DSCP multdestination classifier.

The default multdestination classifier is the IEEE 802.1p multdestination classifier.

### **PFC Priorities**

The eight IEEE 802.1p code points correspond to the eight priorities that priority-based flow control (PFC) uses to differentiate traffic classes for lossless transport. When you map a forwarding class (which maps to an output queue) to an IEEE 802.1p CoS value, the IEEE 802.1p CoS value identifies the priority.

Although you can map a priority to any output queue (by mapping the priority to a forwarding class), we recommend that the priority and the unicast forwarding class match in a one-to-one correspondence in which priority 0 is assigned to queue 0, priority 1 is assigned to queue 1, and so on, as shown in [Table 381 on page 4849](#). A one-to-one correspondence of queue and priority numbers makes it easier to configure and maintain the mapping of forwarding classes to priorities and queues.

**Table 381: Default IEEE 802.1p Code Point to PFC Priority, Output Queue, and Forwarding Class Mapping**

IEEE 802.1p Code Point	PFC Priority	Unicast Output Queue	Forwarding Class and Packet Drop Attribute
000	0	0	best-effort (drop)
001	1	1	best-effort (drop)
010	2	2	best-effort (drop)
011	3	3	fcoe (no-loss)
100	4	4	no-loss (no-loss)
101	5	5	best-effort (drop)
110	6	6	network-control (drop)
111	7	7	network-control (drop)



**NOTE:** By convention, deployments with converged server access typically use IEEE 802.1p priority 3 (011) for FCoE traffic. The default mapping of the fcoe forwarding class is to queue 3. Apply priority-based flow control (PFC) to the entire FCoE data path to configure the end-to-end lossless behavior that FCoE requires. We recommend that you use priority 3 for FCoE traffic unless your network architecture requires that you use a different priority.



### Fixed Classifiers on Ethernet Interfaces

---

Fixed classifiers map all traffic on an interface to a forwarding class and a loss priority. (As opposed to BA classifiers, which map traffic into multiple different forwarding classes based on the CoS field value in the packet header.) The forwarding class determines the output queue. Incoming traffic of all IEEE 802.1p priorities is classified into the forwarding class specified in the fixed classifier. A scheduler uses the loss priority to control packet discard during periods of congestion by associating different drop profiles with different loss priorities.

You cannot configure a fixed classifier and a BA classifier on the same interface. If you configure a fixed classifier on an interface, you cannot configure a DSCP or an IEEE classifier on that interface. If you configure a DSCP classifier, an IEEE classifier, or both classifiers on an interface, you cannot configure a fixed classifier on that interface.

To switch from a fixed classifier to a BA classifier or to switch from a BA classifier to a fixed classifier, deactivate the existing classifier attachment on the interface, and then attach the new classifier to the interface.



**NOTE:** If you configure a fixed classifier that classifies all incoming traffic into the **fcoe** forwarding class (or any forwarding class designed to handle FCoE traffic), you must ensure that all traffic that enters the interface is FCoE traffic and is tagged with the FCoE IEEE 802.1p code point (priority).

---

### Fixed Classifiers on Native Fibre Channel Interfaces (NP\_Ports)

---

Applying a fixed classifier to a native Fibre Channel (FC) interface (NP\_Port) is a special case. By default, native FC interfaces classify incoming traffic from the FC SAN into the **fcoe** forwarding class and map the traffic to IEEE 802.1p priority 3 (code point 011). When you apply a fixed classifier to an FC interface, you also configure a priority rewrite value for the interface. The FC interface uses the priority rewrite value as the IEEE 802.1p tag value for all incoming packets instead of the default value of 3.

For example, if you specify a priority rewrite value of 5 (code point 101) for an FC interface, the interface tags all incoming traffic from the FC SAN with priority 5 and classifies the traffic into the forwarding class specified in the fixed classifier.



**NOTE:** The forwarding class specified in the fixed classifier on FC interfaces must be a lossless forwarding class.

---

### Multifield Classifiers

---

Multifield classifiers examine multiple fields in a packet such as source and destination addresses and source and destination port numbers of the packet. With MF classifiers, you set the forwarding class and loss priority of a packet based on firewall filter rules.



MF classification is normally performed at the network edge because of the general lack of DiffServ code point (DSCP) support in end-user applications. On a switch at the edge of a network, an MF classifier provides the filtering functionality that scans through a variety of packet fields to determine the forwarding class for a packet. Typically, a classifier performs matching operations on the selected fields against a configured value.

### Packet Classification for Routed VLAN Interfaces (RVIs)

You cannot apply classifiers directly to routed VLAN interfaces (RVIs) because the members of RVIs are VLANs, not ports. However, you can apply classifiers to the VLAN port members of an RVI. You can also apply MF classifiers to RVIs.

#### Related Documentation

- [Understanding CoS Packet Flow on page 4831](#)
- [Understanding Default CoS Settings on page 4834](#)
- [Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces on page 4851](#)
- [Example: Configuring Unicast Classifiers on page 5014](#)
- [Example: Configuring Multidestination \(Multicast, Broadcast, DLF\) Classifiers on page 5017](#)
- [Defining CoS Unicast BA Classifiers on page 5133](#)
- [Defining CoS Multidestination \(Multicast, Broadcast, DLF\) BA Classifiers on page 5135](#)

## Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces

At ingress interfaces, classifiers group incoming traffic into classes based on the IEEE 802.1p or DSCP class of service (CoS) code point bits in the packet header. At egress interfaces, you can use rewrite rules to change (re-mark) the code point bits before the interface forwards the packets. At ingress interfaces, classifiers group incoming traffic into classes based on the IEEE 802.1p or DSCP CoS code point bits in the packet header. At egress interfaces, rewrite rules can change (re-mark) the code point bits before the interface forwards the packets.

You can apply classifiers and rewrite rules to interfaces to control the level of CoS applied to each packet as it traverses the system and the network. This topic describes:

- [Supported Classifier and Rewrite Rule Types on page 4852](#)
- [Ethernet Interfaces Supported for Classifier and Rewrite Rule Configuration on page 4853](#)
- [Default Classifiers on page 4854](#)
- [Default Rewrite Rules on page 4855](#)
- [Classifier Precedence on page 4855](#)
- [Classifier Behavior and Limitations on page 4856](#)
- [Rewrite Rule Precedence and Behavior on page 4857](#)
- [Classifier and Rewrite Rule Configuration Interaction with Ethernet Interface Configuration on page 4857](#)



## Supported Classifier and Rewrite Rule Types

Table 382 on page 4852 shows the types of classifiers and rewrite rules that the QFX Series supports:

**Table 382: Supported Classifiers and Rewrite Rules**

Classifier or Rewrite Rule Type	Description
Fixed classifier	Classifies all ingress traffic on a physical interface into one fixed forwarding class, regardless of the CoS bits in the packet header.
DSCP and DSCP IPv6 unicast classifiers	Classifies IP and IPv6 traffic into forwarding classes and assigns loss priorities to the traffic.
IEEE 802.1p unicast classifier	Classifies Ethernet traffic into forwarding classes and assigns loss priorities to the traffic.
DSCP multidestination classifier (also used for IPv6 multidestination traffic)	Classifies IP and IPv6 multicast, broadcast, and destination lookup fail (DLF) traffic into multidestination forwarding classes. Multidestination classifiers are applied to all interfaces and cannot be applied to individual interfaces.
IEEE 802.1p multidestination classifier	Classifies Ethernet multicast, broadcast, and destination lookup fail (DLF) traffic into multidestination forwarding classes. Multidestination classifiers are applied to all interfaces and cannot be applied to individual interfaces.
DSCP and DSCP IPv6 rewrite rules	Re-marks the DSCP code points of IP and IPv6 packets before forwarding the packets.
IEEE 802.1p rewrite rule	Re-marks the IEEE 802.1p code points of Ethernet packets before forwarding the packets.



**NOTE:** On native Fibre Channel (FC) interfaces (NP\_Ports) only, you can specify a rewrite value to set the IEEE 802.1p code point of incoming FC traffic when the NP\_Port encapsulates the FC packet in Ethernet before forwarding it to the FCoE network (see [“Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway” on page 4911](#)).

DSCP and IEEE classifiers are behavior aggregate (BA) classifiers. Multidestination classifiers apply to all interfaces; you cannot apply them to individual interfaces.

Classifying packets into forwarding classes assigns packets to the output queues associated with the forwarding classes. Classifying traffic into a forwarding class associates the CoS scheduling for the forwarding class with that traffic.





**NOTE:** In addition to BA classifiers and fixed classifiers, which classify traffic based on the CoS field in the packet header, you can use firewall filters to configure multifield (MF) classifiers. MF classifiers classify traffic based on more than one field in the packet header and take precedence over BA and fixed classifiers.

### Ethernet Interfaces Supported for Classifier and Rewrite Rule Configuration

To apply a classifier to incoming traffic or a rewrite rule to outgoing traffic, you need to apply the classifier or rewrite rule to one or more interfaces. When you apply a classifier or rewrite rule to an interface, the interface uses the classifier to group incoming traffic into forwarding classes and uses the rewrite rule to re-mark the CoS code point value of each packet before it leaves the system.

Not all interfaces types support all types of CoS configuration. This section describes:

- [Interface Types That Support Classifier and Rewrite Rule Configuration on page 4853](#)
- [Classifier and Rewrite Rule Physical and Logical Ethernet Interface Support on page 4853](#)
- [Routed VLAN Interfaces \(RVIs\) on page 4854](#)

#### ***Interface Types That Support Classifier and Rewrite Rule Configuration***

You can apply classifiers to all Ethernet interfaces. For Layer 3 LAGs, configure BA or fixed classifiers on the LAG (ae) interface. The classifier configured on the LAG is valid on all of the LAG member interfaces.

You can apply fixed classifiers to native FC interfaces (NP\_Ports). You cannot apply other types of classifiers or rewrite rules to native FC interfaces. You can rewrite the value of the IEEE 802.1p code point of incoming FC traffic when the interface encapsulates it in Ethernet before forwarding it to the FCoE network as described in [“Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway” on page 4911](#).

#### ***Classifier and Rewrite Rule Physical and Logical Ethernet Interface Support***

The QFX Series Ethernet ports can function as:

- Layer 2 physical interfaces (family ethernet-switching)
- Layer 2 logical interfaces (family ethernet-switching)
- Layer 3 physical interfaces (family inet/inet6)
- Layer 3 logical interfaces (family inet/inet6)

You can apply CoS classifiers and rewrite rules only to the following interfaces:

- Layer 2 logical interfaces
- Layer 3 physical interfaces if at least one logical Layer 3 interface is configured on the physical interface





**NOTE:** The CoS you configure on a Layer 3 physical interface is applied to all of the Layer 3 logical interfaces on that physical interface. This means that each Layer 3 interface uses the same classifiers and rewrite rules for all of the Layer 3 traffic on that interface.

You cannot apply classifiers or rewrite rules to Layer 2 physical interfaces or to Layer 3 logical interfaces. [Table 383 on page 4854](#) shows on which interfaces you can configure and apply classifiers and rewrite rules.

**Table 383: Ethernet Interface Support for Classifier and Rewrite Rule Configuration**

CoS Classifiers and Rewrite Rules	Layer 2 Physical Interfaces	Layer 2 Logical Interfaces	Layer 3 Physical Interfaces (If at Least One Logical Layer 3 Interface Is Defined)	Layer 3 Logical Interfaces
Fixed classifier	No	Yes	Yes	No
DSCP classifier	No	Yes	Yes	No
DSCP IPv6 classifier	No	Yes	Yes	No
IEEE 802.1p classifier	No	Yes	Yes	No
DSCP rewrite rule	No	Yes	Yes	No
DSCP IPv6 rewrite rule	No	Yes	Yes	No
IEEE 802.1p rewrite rule	No	Yes	Yes	No



**NOTE:** IEEE 802.1p and DSCP multidestination classifiers are applied to all interfaces and cannot be applied to individual interfaces. No DSCP IPv6 multidestination classifier is supported. IPv6 multidestination traffic uses the DSCP multidestination classifier.

### ***Routed VLAN Interfaces (RVIs)***

You cannot apply classifiers and rewrite rules directly to routed VLAN interfaces (RVIs) because the members of RVIs are VLANs, not ports. However, you can apply classifiers and rewrite rules to the VLAN port members of an RVI. You can also apply MF classifiers to RVIs.

### **Default Classifiers**

If you do not explicitly configure classifiers on an Ethernet interface, the QFX Series applies default classifiers (see “[Understanding Default CoS Settings](#)” on page 4834) so that the traffic receives basic CoS treatment. The factors that determine the default classifier applied to the interface include the interface type (Layer 2 or Layer 3), the port mode



(trunk, tagged-access, or access), and whether logical interfaces have been configured. The system applies a default classifier using the following rules:

- If the physical interface has at least one Layer 3 logical interface configured, it uses the default DSCP classifier.
- If the physical interface has a Layer 2 logical interface in trunk mode or tagged-access mode, it uses the default trusted classifier.
- If the physical interface has a Layer 2 logical interface in access mode, it uses the default untrusted classifier.
- If the physical interface has no logical interface configured, no default classifier is applied.
- The default multidestination classifier is the IEEE 802.1p multidestination classifier.

### Default Rewrite Rules

No default rewrite rules are applied to interfaces. If you want to re-mark packets at the egress interface, you must explicitly configure a rewrite rule.

### Classifier Precedence

You can apply multiple unicast classifiers (MF, fixed, IEEE 802.1p, or DSCP) to a physical or logical Ethernet interface to handle different types of traffic. When you apply more than one classifier to an interface, the system uses an order of precedence to determine which classifier to use on physical and logical interfaces:

- [Unicast Classifier Precedence on Physical Ethernet Interfaces on page 4855](#)
- [Unicast Classifier Precedence on Logical Ethernet Interfaces on page 4856](#)

#### ***Unicast Classifier Precedence on Physical Ethernet Interfaces***

The precedence of unicast classifiers on physical interfaces, from the highest-priority classifier to the lowest-priority classifier, is:

- MF classifier on a logical interface (no classifier has a higher priority than MF classifiers)
- Fixed classifier on the physical interface
- DSCP or DSCP IPv6 classifier on the physical interface
- IEEE 802.1p classifier on the physical interface

You can apply both a DSCP classifier and an IEEE 802.1p classifier on a physical interface. When both a DSCP and an IEEE classifier are on an interface, IP traffic uses the DSCP classifier, and all other traffic uses the IEEE classifier.





**NOTE:** You cannot apply a fixed classifier and a DSCP or IEEE classifier to the same interface. If a DSCP classifier, an IEEE classifier, or both are on an interface, you cannot apply a fixed classifier to that interface unless you first delete the DSCP and IEEE classifiers. If a fixed classifier is on an interface, you cannot apply a DSCP classifier or an IEEE classifier unless you first delete the fixed classifier.

---

### ***Unicast Classifier Precedence on Logical Ethernet Interfaces***

The precedence of unicast classifiers on logical interfaces, from the highest priority classifier to the lowest priority classifier, is:

- MF classifier on a logical interface (no classifier has a higher priority than MF classifiers)
- Fixed classifier on the logical interface
- DSCP or DSCP IPv6 classifier on the physical interface
- IEEE 802.1p classifier on the physical interface

You can apply both a DSCP classifier and an IEEE 802.1p classifier on a logical interface. When both a DSCP and an IEEE classifier are on an interface, IP traffic uses the DSCP classifier, and all other traffic uses the IEEE classifier.

### **Classifier Behavior and Limitations**

---

Consider the following behaviors and constraints when you apply classifiers to physical and logical Ethernet interfaces:

- You can configure only one DSCP classifier (IP or IPv6) on a physical interface. You cannot configure both types of DSCP classifier on one physical interface. Both IP and IPv6 traffic use whichever DSCP classifier is configured on the interface.
- When you configure a DSCP or a DSCP IPv6 classifier on a physical interface and the physical interface has at least one logical Layer 3 interface, all packets (IP, IPv6, and non-IP) use that classifier.
- An interface with both a DSCP classifier (IP or IPv6) and an IEEE 802.1p classifier uses the DSCP classifier for IP and IPv6 packets, and uses the IEEE classifier for all other packets.
- Fixed classifiers and BA classifiers (DSCP and IEEE classifiers) are not permitted simultaneously on an interface. If you configure a fixed classifier on an interface, you cannot configure a DSCP or an IEEE classifier on that interface. If you configure a DSCP classifier, an IEEE classifier, or both classifiers on an interface, you cannot configure a fixed classifier on that interface.
- When you configure an IEEE 802.1p classifier on a physical interface and a DSCP classifier is not explicitly configured on that interface, the interface uses the IEEE classifier for all types of packets. No default DSCP classifier is applied to the interface. (In this case, if you want a DSCP classifier on the interface, you must explicitly configure it.)



- The system does not apply a default classifier to a physical interface until you create a logical interface on that physical interface. If you configure a Layer 3 logical interface, the system uses the default DSCP classifier. If you configure a Layer 2 logical interface, the system uses the default IEEE 802.1p trusted classifier if the port is in trunk mode or tagged-access mode, or the default IEEE 802.1p untrusted classifier if the port is in access mode.
- MF classifiers configured on logical interfaces take precedence over BA and fixed classifiers. (Use firewall filters to configure MF classifiers.) When BA or fixed classifiers are present on an interface, you can still configure an MF classifier on that interface.

### Rewrite Rule Precedence and Behavior

The following rules apply on both physical and logical Ethernet interfaces for rewrite rules:

- If you configure both one DSCP (or DSCP IPv6) rewrite rule and one IEEE 802.1p rewrite rule on an interface, both rewrite rules take effect. Traffic with IP and IPv6 headers use the DSCP rewrite rule, and traffic with a VLAN tag uses the IEEE rewrite rule.
- If you do not explicitly configure a rewrite rule, there is no default rewrite rule, so the system does not apply any rewrite rule to the interface.
- You can apply a DSCP rewrite rule or a DSCP IPv6 rewrite rule to an interface, but you cannot apply both a DSCP and a DSCP IPv6 rewrite rule to the same interface. Both IP and IPv6 packets use the same DSCP rewrite rule, regardless if the configured rewrite rule is DSCP or DSCP IPv6.

### Classifier and Rewrite Rule Configuration Interaction with Ethernet Interface Configuration

You can apply classifiers and rewrite rules only on Layer 2 logical interfaces and Layer 3 physical interfaces (if the Layer 3 physical interface has at least one defined logical interface). This section focuses on BA classifiers, but the interaction between BA classifiers and interfaces described in this section also applies to fixed classifiers and rewrite rules.

There are two components to applying classifiers or rewrite rules to interfaces:

1. Setting the interface family (inet, inet6, or ethernet-switching; ethernet-switching is the default interface family) in the **[edit interfaces]** configuration hierarchy.
2. Applying a classifier or rewrite rule to the interface in the **[edit class-of-service]** hierarchy.

These are separate operations that can be set and committed at different times. Because the type of classifier or rewrite rule you can apply to an interface depends on the interface family configuration, the system performs checks to ensure that the configuration is valid. The method the system uses to notify you of an invalid configuration depends on the **set** operation that causes the invalid configuration.

When applying the classifier or rewrite rule to the interface in the **[edit class-of-service]** hierarchy causes an invalid configuration, the system rejects the configuration and returns a commit check error.



When setting the interface family in the **[edit interfaces]** configuration hierarchy causes an invalid configuration, the system creates a syslog error message. When you receive the error message, you need to remove the classifier or rewrite rule configuration from the logical interface and apply it to the physical interface, or remove the classifier or rewrite rule configuration from the physical interface and apply it to the logical interface. For classifiers, if you do not take action to correct the error, the system programs the default classifier for the interface family on the interface. (There are no default rewrite rules. If the commit check fails, no rewrite rule is applied to the interface.)

Two scenarios illustrate these situations:

- [Scenario 1: Applying a Classifier to an Ethernet Interface Causes a Commit Check Error on page 4858](#)
- [Scenario 2: Configuring the Ethernet Interface Family Causes a Syslog Error on page 4859](#)



**NOTE:** Both of these scenarios also apply to fixed classifiers and rewrite rules.

---

### ***Scenario 1: Applying a Classifier to an Ethernet Interface Causes a Commit Check Error***

In Scenario 1, we set the interface family, and then specify an invalid classifier.

1. Set and commit the interface as a Layer 3 (family **inet**) interface:

```
[edit interfaces]
user@switch# set xe-0/0/20 unit 0 family inet
user@switch# commit
```

This commit operation succeeds.

2. Set and commit a DSCP classifier on the logical interface (this example uses a DSCP classifier named **dscp1**):

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/20 unit 0 classifiers dscp dscp1
user@switch# commit
```

This configuration is not valid, because it attempts to apply a classifier to a Layer 3 logical interface. Because the failure is caused by the class-of-service configuration and not by the interface configuration, the system rejects the commit operation and issues a commit error, not a syslog message.

Note that the commit operation succeeds if you apply the classifier to the physical Layer 3 interface as follows:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/20 classifiers dscp dscp1
user@switch# commit
```

Because the logical unit is not specified, the classifier is applied to the physical Layer 3 interface in a valid configuration, and the commit check succeeds.



**Scenario 2: Configuring the Ethernet Interface Family Causes a Syslog Error**

In Scenario 2, we set the classifier first, then set an invalid interface type.

1. Set and commit a DSCP classifier on a Layer 3 logical interface, assuming that the interface has no existing configuration:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/20 unit 0 classifiers dscp dscp1
user@switch# commit
```

This commit succeeds. Because no explicit configuration existed on the interface, it is by default a Layer 2 (**family ethernet-switching**) interface. Layer 2 logical interfaces support BA classifiers, so applying the classifier is a valid configuration.

2. Set and commit the interface as a Layer 3 interface (family **inet**) interface:

```
[edit interfaces]
user@switch# set xe-0/0/20 unit 0 family inet
user@switch# commit
```

This configuration is not valid because it attempts to change an interface from Layer 2 (**family ethernet-switching**) to Layer 3 (**family inet**) when a classifier has already been applied to a logical interface. Layer 3 logical interfaces do not support classifiers. Because the failure is caused by the interface configuration and not by the class-of-service configuration, the system does not issue a commit error, but instead issues a syslog message.

When the system issues the syslog message, it programs the default classifier for the interface type on the interface. In this scenario, the interface has been configured as a Layer 3 interface, so the system applies the default DSCP profile to the physical Layer 3 interface.

In this scenario, to install a configured DSCP classifier, you remove the misconfigured classifier from the Layer 3 logical interface and apply it to the Layer 3 physical interface. For example:

```
[edit]
user@switch# delete class-of-service interfaces xe-0/0/20 unit 0 classifiers dscp dscp1
user@switch# commit
user@switch# set class-of-service interfaces xe-0/0/20 classifiers dscp dscp1
user@switch# commit
```

**Related  
Documentation**

- [Understanding CoS Packet Flow on page 4831](#)
- [Understanding Default CoS Settings on page 4834](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Understanding Default CoS Scheduling and Classification on page 4866](#)
- [Understanding CoS Rewrite Rules on page 4933](#)
- [Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 4911](#)
- [Example: Configuring Unicast Classifiers on page 5014](#)
- [Example: Configuring Multidestination \(Multicast, Broadcast, DLF\) Classifiers on page 5017](#)



- [Defining CoS Rewrite Rules on page 5155](#)
- [Configuring CoS Fixed Classifier Rewrite Values for Native FC Interfaces \(NP\\_Ports\) on page 5151](#)

## Understanding CoS Forwarding Classes

Forwarding classes group traffic and assign the traffic to output queues. Each forwarding class is mapped to an output queue. Classification identifies the output queue for each incoming packet by mapping the packet code point bits to forwarding classes. The forwarding class to queue mapping defines the output queue used for the packet.

A classifier must associate each packet with one of the following five default forwarding classes or with a user-configured forwarding class in order to assign an output queue to the packet:

- **fcoe**—Guaranteed delivery for Fibre Channel over Ethernet (FCoE) traffic.
- **no-loss**—Guaranteed delivery for TCP lossless traffic.
- **best-effort**—Provides best-effort delivery without a service profile. Loss priority is typically not carried in a class-of-service (CoS) value.
- **network-control**—Supports protocol control and is typically high priority.
- **mcast**—Provides no service profile for multdestination (multicast, broadcast, and destination lookup fail) packets.

The switch supports up to 12 forwarding classes, thus enabling flexible, differentiated, packet classification. For example, you can configure multiple classes of best-effort traffic such as **best-effort**, **best-effort1**, and **best-effort2**.

The switch supports up to 12 output queues: 8 output queues for unicast traffic (queues 0 through 7) and 4 output queues for multdestination traffic (queues 8 through 11). Forwarding classes mapped to unicast queues are associated with unicast traffic, and forwarding classes mapped to multdestination queues are associated with multdestination traffic. You cannot map unicast and multdestination traffic to the same queue. You cannot map a strict-high priority queue to a multdestination forwarding class (queues 8 through 11 do not support strict-high priority configuration).

- [Default Forwarding Classes on page 4860](#)
- [Forwarding Class Configuration Rules on page 4862](#)
- [Lossless Transport Support on page 4863](#)

---

### Default Forwarding Classes

[Table 384 on page 4861](#) shows the four default forwarding classes defined for unicast traffic, and [Table 385 on page 4862](#) shows the four default forwarding classes defined for multicast traffic.

If desired, you can rename the forwarding classes associated with the queues supported on your switch. Assigning a new class name to an output queue does not alter the default classification or scheduling that is applicable to that queue. CoS configurations can be



quite complicated, so unless it is required by your scenario, we recommend that you not alter the default class names or queue number associations.

**Table 384: Default Forwarding Classes for Unicast Packets**

Forwarding Class Name	Default Queue Mapping	Comments
best-effort (be)	0	<p>The software does not apply any special CoS handling to packets with 000000 in the DiffServ field. This is a backward compatibility feature. These packets are usually dropped under congested network conditions.</p> <p>By default, this is a lossy forwarding class with a packet drop attribute of <b>drop</b>.</p>
fcoe	3	<p>The software delivers assured bandwidth, low loss, low delay, and low delay variation (jitter) end to end for packets in this service class. The software accepts excess traffic in this class, but in contrast to the assured forwarding class, the out-of-profile expedited-forwarding class packets can be forwarded out of sequence or dropped.</p> <p><b>NOTE:</b> By convention, deployments with converged server access typically use IEEE 802.1p priority 3 (011) for FCoE traffic. The default mapping of the <b>fcoe</b> forwarding class is to queue 3. Apply priority-based flow control (PFC) to the entire FCoE data path to configure the end-to-end lossless behavior that FCoE requires.</p> <p>We recommend that you use priority 3 for FCoE traffic unless your network architecture requires that you use a different priority.</p> <p>By default, this is a lossless forwarding class with a packet drop attribute of <b>no-loss</b>.</p>
no-loss	4	<p>The software offers a high level of assurance that the packets are delivered as long as the packet flow from the customer stays within a certain service profile that you define.</p> <p>The software accepts excess traffic, but it applies a tail-drop profile to determine if the excess packets are dropped and not forwarded.</p> <p>Up to two drop probabilities (low and high) are defined for this service class.</p> <p>By default, this is a lossless forwarding class with a packet drop attribute of <b>no-loss</b>.</p>
network-control (nc)	7	<p>The software delivers packets in this service class with a high priority. (These packets are not delay-sensitive.)</p> <p>Typically, these packets represent routing protocol hello or keepalive messages. Because loss of these packets jeopardizes proper network operation, packet delay is preferable to packet discard.</p> <p>By default, this is a lossy forwarding class with a packet drop attribute of <b>drop</b>.</p>



Table 385: Default Forwarding Classes for Multicast Packets

Forwarding Class Name	Default Queue Mapping	Comments
mcast	8	<p>The software does not apply any special CoS handling to the multdestination packets. These packets are usually dropped under congested network conditions.</p> <p>By default, this is a lossy forwarding class with a packet drop attribute of <b>drop</b>.</p>



**NOTE:** Mirrored traffic is always sent to the queue that corresponds to the multdestination forwarding class. The switched copy of the mirrored traffic is forwarded with the priority determined by the behavior aggregate classification process.

### Forwarding Class Configuration Rules

Take the following rules into account when you configure forwarding classes:

- [Queue Assignment Rules on page 4862](#)
- [Scheduling Rules on page 4862](#)
- [Rewrite Rules on page 4863](#)

#### Queue Assignment Rules

The following rules govern queue assignment:

- CoS configurations that specify more queues than the switch can support are not accepted. The commit operation fails with a detailed message that states the total number of queues available.
- All default CoS configurations are based on queue number. The name of the forwarding class that appears in the default configuration is the forwarding class currently associated with that queue.
- Only unicast forwarding classes can be mapped to unicast queues (0 through 7), and only multdestination forwarding classes can be mapped to multdestination queues (8 through 11).
- Strict-high priority queues cannot be mapped to multdestination forwarding classes. (Strict-high priority traffic cannot be mapped to queues 8 through 11).
- If you map more than one forwarding class to a queue, all of the forwarding classes mapped to the same queue must have the same packet drop attribute (all of the forwarding classes must be lossy, or all of the forwarding classes mapped to a queue must be lossless).

#### Scheduling Rules

When you define a forwarding class that is used on the switch (the behavior aggregate classifier has a forwarding class and you expect traffic for the forwarding class), you



must also define a scheduling policy for the forwarding class. Defining a scheduling policy means:

- Mapping a scheduler to the forwarding class in a scheduler map
- Including the forwarding class in a forwarding class set
- Associating the scheduler map with a traffic control profile
- Attaching the traffic control profile to a forwarding class set and an interface

### ***Rewrite Rules***

On each physical interface, either all forwarding classes that are being used on the interface must have rewrite rules configured, or no forwarding classes that are being used on the interface can have rewrite rules configured. On any physical port, do not mix forwarding classes with rewrite rules and forwarding classes without rewrite rules.

### **Lossless Transport Support**

---

The QFX Series supports up to six lossless forwarding classes. For lossless transport, you must enable PFC on the IEEE 802.1p code point of lossless forwarding classes. The following limitations apply to support lossless transport:

- The external cable length from the QFX3500 or QFabric system Node device to other devices cannot exceed 300 meters.
- The internal cable length from the QFabric system Node device to the QFabric system Interconnect device cannot exceed 150 meters.
- For FCoE traffic, the interface maximum transmission unit (MTU) must be at least 2180 bytes to accommodate the packet payload, headers, and checks.





.....

**NOTE:** Junos OS Release 12.2 introduces changes to the way the QFX Series handles lossless forwarding classes (the `fcoe` and `no-loss` forwarding classes).

In Junos OS Release 12.1, both explicitly configuring the `fcoe` and `no-loss` forwarding classes, and using the default configuration for these forwarding classes, resulted in the same lossless behavior for traffic mapped to those forwarding classes.

However, in Junos OS Release 12.2, if you explicitly configure the `fcoe` or the `no-loss` forwarding class, that forwarding class is no longer treated as a lossless forwarding class. Traffic mapped to these forwarding classes is treated as lossy (best-effort) traffic. This is true even if the explicit configuration is exactly the same as the default configuration.

If your CoS configuration from Junos OS Release 12.1 or earlier includes the explicit configuration of the `fcoe` or the `no-loss` forwarding class, then when you upgrade to Junos OS Release 12.2, those forwarding classes are not lossless. To preserve the lossless treatment of these forwarding classes, delete the explicit `fcoe` and `no-loss` forwarding class configuration before you upgrade to Junos OS Release 12.2.

See [“Overview of CoS Changes Introduced in Junos OS Release 12.2” on page 4820](#) for detailed information about this change and how to delete an existing lossless configuration.

In Junos OS Release 12.3, the default behavior of the `fcoe` and `no-loss` forwarding classes is the same as in Junos OS Release 12.2. However, in Junos OS Release 12.3, you can configure up to six lossless forwarding classes. All explicitly configured lossless forwarding classes must include the new `no-loss` packet drop attribute or the forwarding class is lossy.

.....

**Related  
Documentation**

- [Overview of CoS Changes Introduced in Junos OS Release 12.2 on page 4820](#)
- [Understanding Junos CoS Components on page 4827](#)
- [Understanding CoS Packet Flow on page 4831](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)
- [Example: Configuring Forwarding Classes on page 5024](#)
- [Defining CoS Forwarding Classes on page 5137](#)



## Understanding CoS Forwarding Class Sets (Priority Groups)

A forwarding class set is the Junos OS configuration construct that equates to a priority group in enhanced transmission selection (ETS, described in IEEE 802.1Qaz). The switch implements ETS using a two-tier hierarchical scheduler.

A priority group is a group of queues (priorities). Mapping a forwarding class to a queue defines the traffic for that queue, so a priority equates to a queue (forwarding class). The queues in a priority group share the port bandwidth allocated to that priority group. The traffic for queues in one priority group usually share similar traffic-handling requirements.

You can configure up to three unicast forwarding class sets and one multicast forwarding class set. Only unicast forwarding classes can belong to unicast forwarding class sets. Only multicast forwarding classes can belong to the multicast forwarding class set.

If you configure a strict-high priority queue, you must observe the following rules when configuring forwarding class sets:

- You must create a separate forwarding class set for the strict-high priority queue.
- Only one forwarding class set can contain strict-high priority queues.
- Strict-high priority queues cannot belong to the same forwarding class set as queues that are not strict-high priority.
- A strict-high priority queue cannot belong to a multidestination forwarding class set.
- You cannot configure a guaranteed minimum bandwidth (guaranteed rate) for a forwarding class set that includes a strict-high priority queue. (You also cannot configure a guaranteed minimum bandwidth for a strict-high queue.)

You must use hierarchical scheduling to define CoS for output queues. The two-tier hierarchical scheduler defines bandwidth resources for the priority group, and then allocates those resources among the priorities that belong to the priority group.

If you do not explicitly configure forwarding class sets, the system automatically creates a default forwarding class set that contains all of the forwarding classes on the switch. The system assigns 100 percent of the port output bandwidth to the default forwarding class set. Ingress traffic is classified based on the default classifier settings. The forwarding classes (queues) in the default forwarding class set receive bandwidth based on the default scheduler settings. Forwarding classes that are not part of the default scheduler receive no bandwidth. The default priority group is transparent. It does not appear in the configuration and is used for Data Center Bridging Capability Exchange Protocol (DCBX) advertisement.

When you explicitly configure forwarding class sets and map them to an interface, any forwarding class that you do not map to a forwarding class set receives no guaranteed bandwidth on that interface. Forwarding classes that belong to the default forwarding class set might receive bandwidth if the other forwarding class sets are not using all of the port bandwidth. However, the amount of bandwidth forwarding classes that are not in explicitly configured forwarding class sets receive is not guaranteed. The bandwidth



for the default forwarding class depends on whether extra port bandwidth is available and therefore is not deterministic.

To guarantee bandwidth for forwarding classes in a predictable manner, be sure to map all forwarding classes that you expect to carry traffic on an interface to a forwarding class set and map the forwarding class set to the interface.

**Related  
Documentation**

- [Understanding CoS Hierarchical Port Scheduling \(ETS\) on page 4872](#)
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Forwarding Class Sets on page 5027](#)
- [Defining CoS Forwarding Class Sets on page 5139](#)

## Understanding Default CoS Scheduling and Classification

If you do not configure hierarchical scheduling on an interface, the switch uses the default classifiers for ingress traffic and the default schedulers for egress traffic. Default scheduling and classification handle all traffic types (best-effort, FCoE, no-loss, network-control, and multdestination traffic).

Hierarchical scheduling groups egress queues (priorities, configured as forwarding classes) into priority groups (forwarding class sets). If you use only the default traffic scheduling and classification, the switch automatically creates a default priority group that contains all of the priorities (forwarding classes, which represent output queues) and assigns 100 percent of the port output bandwidth to that priority group. The forwarding classes (queues) in the default forwarding class set receive bandwidth based on the default classifier settings. The default priority group is transparent. It does not appear in the configuration and is used for Data Center Bridging Capability Exchange (DCBX) protocol advertisement.



**NOTE:** If you explicitly configure one or more priority groups on an interface, any forwarding class that is not assigned to a priority group on that interface receives *no bandwidth*. This means that if you configure hierarchical scheduling on an interface, every forwarding class (priority) that you want to forward traffic on that interface must belong to a forwarding class set (priority group).

The following sections describe:

- [Default Classification on page 4866](#)
- [Default Scheduling on page 4869](#)
- [Default DCBX Advertisement on page 4870](#)
- [Default Scheduling and Classification Summary on page 4870](#)

### Default Classification

---

The default classifiers assign unicast and multicast best-effort and network-control ingress traffic to forwarding classes and loss priorities. The QFX Series applies default unicast IEEE 802.1, unicast DSCP, and multdestination classifiers to each interface that



does not have explicitly configured classifiers. If you explicitly configure one type of classifier but not other types of classifiers, the system uses only the configured classifier and does not use default classifiers for other types of traffic. There are two different default unicast IEEE 802.1 classifiers, a trusted classifier for ports that are in trunk mode or tagged-access mode, and an untrusted classifier for ports that are in access mode.

[Table 386 on page 4867](#) shows the default mapping of IEEE 802.1 code-point values to unicast forwarding classes and loss priorities for ports in trunk mode or tagged-access mode.

**Table 386: Default IEEE 802.1 Unicast Classifiers for Ports in Trunk Mode or Tagged-Access Mode (Trusted Classifier)**

Code Point	Forwarding Class	Loss Priority
be (000)	best-effort	low
be1 (001)	best-effort	low
ef (010)	best-effort	low
ef1 (011)	fcoe	low
af11 (100)	no-loss	low
af12 (101)	best-effort	low
nc1 (110)	network-control	low
nc2 (111)	network-control	low

[Table 387 on page 4867](#) shows the default mapping of IEEE 802.1p code-point values to unicast forwarding classes and loss priorities for ports in access mode (all incoming traffic is mapped to best-effort forwarding classes).

**Table 387: Default IEEE 802.1 Unicast Classifiers for Ports in Access Mode (Untrusted Classifier)**

Code Point	Forwarding Class	Loss Priority
000	best-effort	low
001	best-effort	low
010	best-effort	low
011	best-effort	low
100	best-effort	low
101	best-effort	low



**Table 387: Default IEEE 802.1 Unicast Classifiers for Ports in Access Mode (Untrusted Classifier) (continued)**

Code Point	Forwarding Class	Loss Priority
110	best-effort	low
111	best-effort	low

[Table 388 on page 4868](#) shows the default mapping of IEEE 802.1 code-point values to multdestination (multicast, broadcast, and destination lookup fail traffic) forwarding classes and loss priorities.

**Table 388: Default IEEE 802.1 Multidestination Classifiers**

Code Point	Forwarding Class	Loss Priority
be (000)	mcast	low
be1 (001)	mcast	low
ef (010)	mcast	low
ef1 (011)	mcast	low
af11 (100)	mcast	low
af12 (101)	mcast	low
nc1 (110)	mcast	low
nc2 (111)	mcast	low

[Table 389 on page 4868](#) shows the default mapping of DSCP code-point values to unicast forwarding classes and loss priorities for DSCP IP and DCSP IPv6.

**Table 389: Default DSCP IP and IPv6 Unicast Classifiers**

Code Point	Forwarding Class	Loss Priority
ef (101110)	best-effort	low
af11 (001010)	best-effort	low
af12 (001100)	best-effort	low
af13 (001110)	best-effort	low
af21 (010010)	best-effort	low
af22 (010100)	best-effort	low



Table 389: Default DSCP IP and IPv6 Unicast Classifiers (*continued*)

Code Point	Forwarding Class	Loss Priority
af23 (010110)	best-effort	low
af31 (011010)	best-effort	low
af32 (011100)	best-effort	low
af33 (011110)	best-effort	low
af41 (100010)	best-effort	low
af42 (100100)	best-effort	low
af43 (100110)	best-effort	low
be (000000)	best-effort	low
cs1 (001000)	best-effort	low
cs2 (010000)	best-effort	low
cs3 (011000)	best-effort	low
cs4 (100000)	best-effort	low
cs5 (101000)	best-effort	low
nc1 (110000)	network-control	low
nc2 (111000)	network-control	low



**NOTE:** There are no default DSCP IP or IPv6 multdestination classifiers for multdestination traffic. DSCP IPv6 multdestination classifiers are not supported for multdestination traffic.

### Default Scheduling

The default schedulers allocate egress bandwidth resources to unicast and multicast best-effort and network-control egress traffic as shown in [Table 390 on page 4869](#):

Table 390: Default Scheduler Configuration

Default Scheduler and Queue Number	Guaranteed Rate (Minimum Bandwidth)	Shaping Rate (Maximum Bandwidth)	Excess Bandwidth Sharing	Priority	Buffer Size
Best-effort scheduler (queue 0)	5%	None	5%	low	5%



Table 390: Default Scheduler Configuration (*continued*)

Default Scheduler and Queue Number	Guaranteed Rate (Minimum Bandwidth)	Shaping Rate (Maximum Bandwidth)	Excess Bandwidth Sharing	Priority	Buffer Size
FCoE scheduler (queue 3)	35%	None	35%	low	35%
No-loss scheduler (queue 4)	35%	None	35%	low	35%
Network-control scheduler (queue 7)	5%	None	5%	low	5%
Multidestination scheduler (queue 8)	20%	None	20%	low	20%



**NOTE:** The minimum guaranteed bandwidth rate also determines the amount of excess (extra) bandwidth that the queue can share. Extra bandwidth is allocated to queues in proportion to the minimum guaranteed bandwidth rate of each queue.

#### Default DCBX Advertisement

When you configure hierarchical scheduling on an interface, DCBX advertises each priority group, the priorities in each priority group, and the bandwidth properties of each priority and priority group.

If you do not configure hierarchical scheduling on an interface, DCBX advertises the automatically created default priority group and its priorities. DCBX also advertises the default bandwidth allocation of the priority group, which is 100 percent of the port bandwidth.

#### Default Scheduling and Classification Summary

If you do not configure hierarchical scheduling on an interface:

- Default classifiers classify ingress traffic.
- Default schedulers schedule egress traffic.
- DCBX advertises a single default priority group with 100 percent of the port bandwidth allocated to that priority group. All priorities (forwarding classes) are assigned to the default priority group and receive bandwidth based on their default schedulers. The default priority group is generated automatically and is not user-configurable.

#### Related Documentation

- [Understanding CoS Packet Flow on page 4831](#)
- [Understanding CoS Hierarchical Port Scheduling \(ETS\) on page 4872](#)
- [Understanding Default CoS Settings on page 4834](#)
- [Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces on page 4851](#)



- [Understanding DCB Features and Requirements on page 4389](#)
- [Example: Configuring Unicast Classifiers on page 5014](#)
- [Example: Configuring Multidestination \(Multicast, Broadcast, DLF\) Classifiers on page 5017](#)
- [Example: Configuring Queue Schedulers on page 5030](#)



## Understanding CoS Hierarchical Port Scheduling (ETS)

Scheduling defines the class-of-service (CoS) properties of output queues. These properties include the amount of interface bandwidth assigned to the queue, the queue priority, and the drop profiles associated with the queue.

Hierarchical port scheduling is a two-tier process that provides better port bandwidth utilization and greater flexibility to allocate resources to queues and to groups of queues. Hierarchical scheduling includes the Junos OS implementation of enhanced transmission selection (ETS, described in IEEE 802.1Qaz).

The two tiers used in hierarchical scheduling are priorities and priority groups, as shown in [Table 391 on page 4872](#).

**Table 391: Hierarchical Scheduling Tiers**

Junos OS Configuration Construct	Equivalent ETS Construct	Description
Forwarding class	Priority	<p>Think about priorities (forwarding classes) as output queues. You map forwarding classes to queues, so each forwarding class is in essence an output queue.</p> <p>When you use a classifier to map a forwarding class to an IEEE 802.1p code point, the code point identifies that traffic's priority for priority-based flow control (PFC). Thus the forwarding class, the queue mapped to the forwarding class, and the priority mapped to the forwarding class all identify the same traffic.</p>
Forwarding class set	Priority group	<p>Priority groups (forwarding class sets) are groups of priorities. Forwarding class membership in a forwarding class set defines the priority group to which each priority belongs.</p> <p>You can configure up to three unicast priority groups and one multicast forwarding class set.</p>



**NOTE:** If you explicitly configure one or more priority groups on an interface, any priority that is not assigned to a priority group on that interface is assigned to an automatically generated default priority group and receives *no bandwidth*. This means that if you configure hierarchical scheduling on an interface, every forwarding class that you want to forward traffic on that interface must belong to a forwarding class set.

This topic describes:

- [Hierarchical Scheduling and ETS on page 4873](#)
- [ETS Advertisement in DCBX on page 4874](#)
- [Hierarchical Scheduling Process on page 4874](#)




- [Strict-High Priority Queues and Hierarchical Scheduling on page 4875](#)
- [Default Hierarchical Scheduling on page 4875](#)

### Hierarchical Scheduling and ETS

Two-tier hierarchical scheduling enables you to manage bandwidth efficiently by enabling you to define the CoS properties for each priority group and for each priority. One tier of the hierarchical scheduler allocates port bandwidth to a priority group. The other tier of the hierarchical scheduler determines the portion of the priority group bandwidth that a queue can use.

The CoS properties you configure for a priority group define the port bandwidth resources available to the queues in that priority group. The CoS properties you configure for each queue specify the portion or percentage of the total bandwidth configured for the priority group that is available to the queue. [Figure 180 on page 4873](#) shows the relationship of port resource allocation to priority groups and priority group resource allocation to queues (priorities).

**Figure 180: Hierarchical Scheduling Tiers**

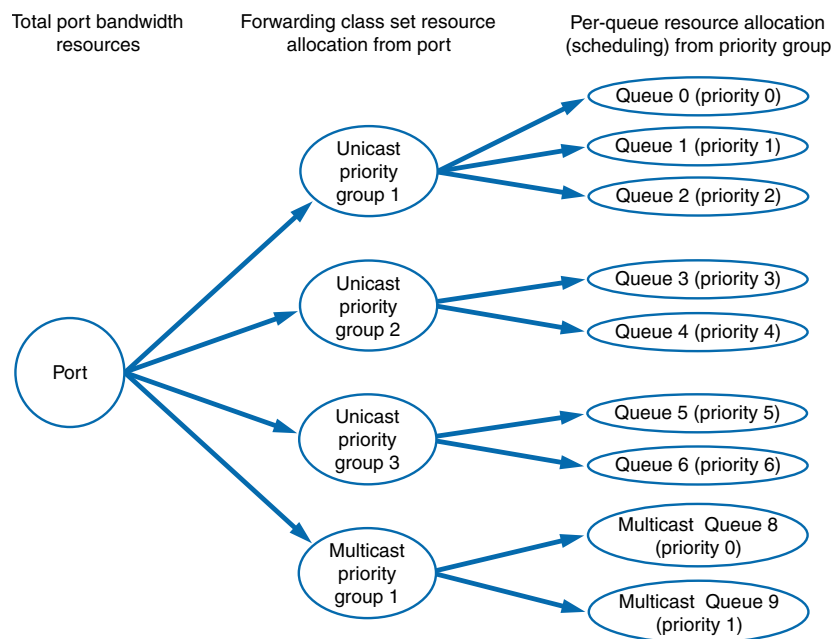

9040722

If a queue is not using its allocated bandwidth, ETS shares the unused bandwidth among the other queues in the priority group. If link bandwidth is available or if a priority group on a link is not using its allocated bandwidth, ETS shares the unused bandwidth with other priority groups on the link. In this way ETS improves link bandwidth utilization and provides each queue with the maximum bandwidth. Priorities that consist of bursty traffic can share bandwidth during periods of low traffic transmission instead of consuming their entire bandwidth allocation when traffic loads are light.



**NOTE:** The available link bandwidth is the bandwidth remaining after servicing strict-high priority flows.



### ETS Advertisement in DCBX

---

When you configure hierarchical scheduling on a port, Data Center Bridging Capability Exchange Protocol (DCBX) advertises:

- Each priority group
- The priorities in each priority group
- The bandwidth properties of each priority group and priority

When you configure hierarchical scheduling on a port, any priority that is not part of an explicitly configured priority group is assigned to the automatically generated default priority group and receives no bandwidth. The default priority group is transparent. It does not appear in the configuration.

### Hierarchical Scheduling Process

---

Hierarchical scheduling consists of multiple configuration steps that create the priorities and the priority groups, schedule their resources, and assign them to interfaces. The steps below correspond to the six blocks in the packet flow diagram shown in [Figure 181 on page 4875](#):

1. Packet classification:
  - Classify incoming traffic into priorities. This consists of either using the default classifiers or configuring classifiers to map IEEE 802.1p code points and loss priorities to the forwarding classes.
  - Apply the classifiers to ingress interfaces. This groups incoming traffic into forwarding classes (priorities) by mapping code points to forwarding classes and loss priorities on the specified interface.
2. Configure the output queues for the forwarding classes (priorities). This consists of either using the default forwarding classes and forwarding-class-to-queue mapping or creating your own forwarding classes and mapping them to queues.
3. Allocate resources to the forwarding classes:
  - Define resources for the priorities. This consists of configuring schedulers to set minimum guaranteed bandwidth, maximum bandwidth, drop profiles for Weighted Random Early Detection (WRED), and bandwidth priority to apply to a forwarding class. Extra bandwidth is shared among queues in proportion to the minimum guaranteed bandwidth of each queue.
  - Map resources to priorities. This consists of mapping forwarding classes to schedulers by using a scheduler map.
4. Configure priority groups. This consists of mapping forwarding classes (priorities) to forwarding class sets (priority groups) to define the priorities that belong to each priority group.
5. Define resources for the priority groups. This consists of configuring traffic control profiles to set minimum guaranteed bandwidth and maximum bandwidth for a priority group. Traffic control profiles also specify a scheduler map, which defines the resources




(schedulers) for the priorities in the priority group. Extra port bandwidth is shared among priority groups in proportion to the minimum guaranteed bandwidth of each priority group.

The traffic control profile bandwidth settings determine the port resources available to the priority group, and the schedulers specified in the scheduler map determine the amount of the priority group resources that each priority receives.

6. Apply the hierarchical scheduling to a port. This consists of attaching one or more priority groups to a port interface. For each priority group, you also attach a traffic control profile. Different priority groups on the same port can use different traffic control profiles.

Figure 181: Hierarchical Scheduling Packet Flow

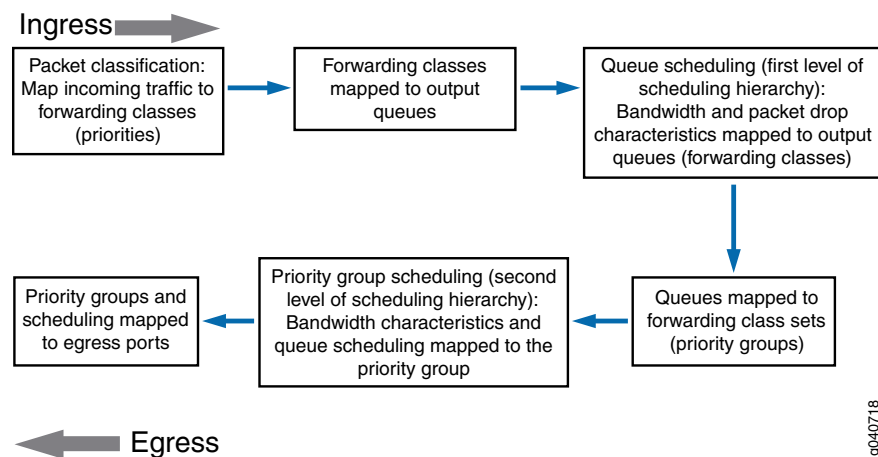

### Strict-High Priority Queues and Hierarchical Scheduling

If you configure a strict-high priority queue, you must observe the following rules:

- You must create a separate forwarding class set (priority group) for the strict-high priority queue.
- Only one forwarding class set can contain strict-high priority queues.
- Strict-high priority queues cannot belong to the same forwarding class set as queues that are not strict-high priority.
- A strict-high priority queue cannot belong to a multidestination forwarding class set.

### Default Hierarchical Scheduling

If you do not explicitly configure hierarchical scheduling, the switch uses the default settings:

- The switch automatically creates a default forwarding class set that contains all of the forwarding classes on the switch. The switch assigns 100 percent of the port output bandwidth to the default forwarding class set. The default forwarding class set is transparent. It does not appear in the configuration and is used for Data Center Bridging Capability Exchange Protocol (DCBX) advertisement.



- Ingress traffic is classified based on the default classifier settings.
- The forwarding classes (queues) in the default forwarding class set receive bandwidth based on the default scheduler settings.

**Related Documentation**

- [Understanding CoS Packet Flow on page 4831](#)
- [Understanding CoS Output Queue Schedulers on page 4876](#)
- [Understanding CoS Priority Group Scheduling on page 4883](#)
- [Benefits of Configuring CoS Hierarchical Port Scheduling](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Understanding Default CoS Scheduling and Classification on page 4866](#)
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Queue Schedulers on page 5030](#)
- [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)
- [Example: Configuring Minimum Guaranteed Output Bandwidth on page 5040](#)
- [Example: Configuring Maximum Output Bandwidth on page 5044](#)

## Understanding CoS Output Queue Schedulers

Output queue scheduling defines the class-of-service (CoS) properties of output queues (priorities). Queue scheduling works with priority group scheduling to create a two-tier hierarchical scheduler. The hierarchical scheduler allocates bandwidth to a group of queues (priority group), and queue scheduling determines the portion of the priority group's bandwidth that a particular queue can use.

Scheduler maps associate queue schedulers with forwarding classes (output queues). You can associate each scheduler map with a traffic control profile, and then associate each traffic control profile with a forwarding class set (priority group) and a port interface. In conjunction with the priority group scheduling configured in the traffic control profile, queue scheduling configures the output queues, packet schedulers, and tail-drop processes that operate according to this mapping.



**NOTE:** When you configure bandwidth for a queue or a priority group, the switch considers only the data as the configured bandwidth. The switch does not account for the bandwidth consumed by the preamble and the interframe gap (IFG). Therefore, when you calculate and configure the bandwidth requirements for a queue or for a priority group, consider the preamble and the IFG as well as the data in the calculations.

- [Output Queue Scheduling Components on page 4877](#)
- [Default Schedulers on page 4878](#)



- [Transmit Rate \(Minimum Guaranteed Bandwidth\) on page 4879](#)
- [Sharing Extra Bandwidth on page 4879](#)
- [Shaping Rate \(Maximum Bandwidth\) on page 4880](#)
- [Scheduling Priority on page 4880](#)
- [Scheduler Drop-Profile Maps on page 4881](#)
- [Buffer Size on page 4881](#)
- [Scheduler Maps on page 4882](#)

### Output Queue Scheduling Components

[Table 392 on page 4877](#) provides a quick reference to the scheduler components you can configure to determine the bandwidth properties of output queues, and [Table 393 on page 4877](#) provides a quick reference to some related scheduling configuration components.

**Table 392: Output Queue Scheduler Components**

Output Queue Scheduler Component	Description
Priority	Sets the scheduling priority applied to the queue.
Shaping rate	Sets the maximum bandwidth the queue can consume.
Transmit rate	Sets the minimum guaranteed bandwidth for the queue. Extra bandwidth is shared among queues in proportion to the minimum guaranteed bandwidth of each queue.
Drop profile	Sets the probability of dropping packets as the queue fills up.
Loss priority	Sets the traffic loss priority to which a drop profile applies.
Drop profile map	Maps a drop profile to a loss priority.
Buffer size	Sets the size of the queue buffer.

**Table 393: Other Scheduling Components**

Other Scheduling Components	Description
Scheduler map	Maps schedulers to queues (forwarding classes, also called priorities).
Forwarding class	Maps traffic to a queue (priority).
Traffic control profile	Sets scheduling for the forwarding class set (priority group) and associates a scheduler map with the forwarding class set to apply queue scheduling to the forwarding classes in the forwarding class set. Extra port bandwidth is shared among forwarding class sets in proportion to the minimum guaranteed bandwidth of each forwarding class set.
Forwarding class set	Name of a priority group. You map forwarding classes to priority groups. A forwarding class set consists of one or more forwarding classes.



## Default Schedulers

Each forwarding class requires an associated scheduler. The default configuration uses only four forwarding classes, unicast best-effort (queue 0), unicast network-control (queue 3), multicast best-effort (queue 8), and multicast network control (queue 11). You can use the default schedulers or you can define new schedulers for these four forwarding classes. For any other forwarding class, you must explicitly configure a scheduler.

Table 394 on page 4878 shows the default schedulers.

**Table 394: Default Schedulers**

Default Scheduler and Queue Number	Guaranteed Rate (Minimum Bandwidth)	Shaping Rate (Maximum Bandwidth)	Excess Bandwidth Sharing	Priority	Buffer Size
Best-effort scheduler (queue 0)	5%	None	5%	Low	5%
FCoE scheduler (queue 3)	35%	None	35%	Low	35%
No-loss scheduler (queue 4)	35%	None	35%	Low	35%
Network-control scheduler (queue 7)	5%	None	5%	Low	5%
Multidestination scheduler (queue 8)	20%	None	20%	Low	20%



**NOTE:** The minimum guaranteed bandwidth rate also determines the amount of excess (extra) bandwidth that the queue can share. Extra bandwidth is allocated to queues in proportion to the minimum guaranteed bandwidth rate of each queue.

There are no resources assigned by default to queues 1, 2, 5, 6, 9, 10, and 11. You can define new unicast forwarding classes to assign to queues 1, 2, 5, and 6, and new multidestination forwarding classes to assign to queues 9, 10, and 11, which do not have default mappings to a forwarding class. You can assign resources to these queues manually using schedulers. In addition, you can change the default forwarding-class-to-queue mappings and the default schedulers.

By default, each queue can exceed the assigned bandwidth if additional bandwidth is available from other queues in the forwarding class set. When a forwarding class does not fully use the allocated minimum transmission bandwidth (transmit rate), other forwarding classes in the forwarding class set can use the remaining bandwidth if those forwarding classes receive more traffic than their allocated bandwidth.



### Transmit Rate (Minimum Guaranteed Bandwidth)

The transmit rate determines the minimum guaranteed bandwidth for each forwarding class. It also determines how much excess (extra) bandwidth each low-priority queue can share; each queue shares extra bandwidth in proportion to its transmit rate. You specify the rate in bits per second as a fixed value such as 1 Mbps or as a percentage of the total forwarding class set minimum guaranteed bandwidth (the guaranteed rate set in the traffic control profile). Either the default scheduler or a scheduler you configure allocates a portion of the outgoing interface bandwidth to each forwarding class.



**NOTE:** For transmit rates below 1 Gbps, we recommend that you configure the transmit rate as a percentage instead of as a fixed rate. This is because the system converts fixed rates into percentages and may round small fixed rates to a lower percentage. For example, a fixed rate of 350 Mbps is rounded down to 3 percent instead of 3.5 percent.

You cannot configure a transmit rate for strict-high priority queues. Queues (forwarding classes) with a configured transmit rate cannot be included in a forwarding class set that has strict-high priority queues.

The allocated bandwidth can exceed the configured minimum rate if additional bandwidth is available from other queues in the forwarding class set. In case of congestion, the configured transmit rate is guaranteed for the queue. This property enables you to ensure that each queue receives the amount of bandwidth appropriate to its level of service.



**NOTE:** Configuring the minimum guaranteed bandwidth (transmit rate) for a forwarding class does not work unless you also configure the minimum guaranteed bandwidth (guaranteed rate) for the forwarding class set in the traffic control profile.

Additionally, the sum of the transmit rates of the queues in a forwarding class set should not exceed the guaranteed rate for the forwarding class set. (You cannot guarantee a minimum bandwidth for the queues that is greater than the minimum bandwidth guaranteed for the entire set of queues.)

### Sharing Extra Bandwidth

Extra bandwidth is available to low-priority queues when the minimum guaranteed bandwidth of the queues does not use the full amount of forwarding class set bandwidth. This extra bandwidth is shared among the forwarding classes in the set based on the minimum guaranteed bandwidth of each queue.

For example, in a forwarding class set, Queue A has a transmit rate of 1 Gbps, Queue B has a transmit rate of 1 Gbps, and Queue C has a transmit rate of 2 Gbps. After servicing the minimum guaranteed bandwidth of these queues, the forwarding class set has an extra 2 Gbps of bandwidth available, and all three queues still have packets to forward. The queues receive the extra bandwidth in proportion to their transmit rates, so Queue A



receives an extra 500 Mbps, Queue B receives an extra 500 Mbps, and Queue C receives an extra 1 Gbps.

### Shaping Rate (Maximum Bandwidth)

---

The shaping rate determines the maximum bandwidth each forwarding class can consume. You specify the rate in bits per second as a fixed value such as 3 Mbps or as a percentage of the total forwarding class set maximum bandwidth (the shaping rate set in the traffic control profile).

The maximum bandwidth for a queue depends on the total bandwidth available to the forwarding class set to which the queue belongs and how much bandwidth the other queues in the forwarding class set consume.



**NOTE:** In QFabric systems, if any queue that contains outgoing packets does not transmit packets for 12 consecutive seconds, the port automatically resets. A strict-high priority queue (or several queues with higher priorities than the starved queue) can consume all of the port bandwidth and prevent another queue from transmitting packets. To prevent a queue from being starved for bandwidth, you can configure a shaping rate on the queue or queues to prevent them from consuming all of the port bandwidth.

---

### Scheduling Priority

---

Scheduling priority determines the order in which an output interface transmits traffic from the queues, thus ensuring that queues containing important traffic receive better access to the outgoing interface. The priority setting in the scheduler determines the priority for the queue.

Two levels of scheduling priority are supported:

- **Low**—Low-priority queues transmit traffic based on the weighted round robin (WRR) algorithm. The scheduler first determines if an individual queue is within its defined bandwidth profile. The scheduler then regularly reevaluates whether each individual queue is within its defined bandwidth profile and compares the amount of data the queue transmits to the amount of bandwidth the scheduler allocates to the queue. When the transmitted amount is less than the allocated amount, the queue is considered to be in profile. A queue is out of profile when its transmitted amount is larger than its allocated amount. Out of profile queue data is transmitted only if bandwidth is available. Otherwise, it is buffered if buffer space is available. If no buffer space is available, the traffic may be dropped.
- **Strict-high**—You can configure only one queue as **strict-high** priority. The other 11 queues are **low** priority.

The **strict-high** priority queue receives preferential treatment over the low-priority queues. The **strict-high** priority queue receives all of its configured bandwidth before low-priority queues are serviced. Low-priority queues do not transmit traffic until the strict-high priority queue is empty. Carefully consider how much bandwidth you want to allocate to the **strict-high** priority queue to avoid starving the low-priority queues.



If you configure a strict-high priority queue, you must observe the following rules:

- You must create a separate forwarding class set (priority group) for the strict-high priority queue.
- Only one forwarding class set can contain strict-high priority queues.
- Strict-high priority queues cannot belong to the same forwarding class set as queues that are not strict-high priority.
- A strict-high priority queue cannot belong to a multidestination forwarding class set.
- You cannot configure a minimum guaranteed bandwidth for a strict-high priority queue. (You cannot configure a transmit rate for a strict-high priority queue scheduler, and you cannot configure a guaranteed rate for a forwarding class set that has a strict-high priority queue.)

Junos OS performs priority queueing using the following steps:

1. Services the strict-high priority queue before any other queues are served
2. Services the minimum bandwidth (transmit rate) of low-priority queues until the minimum is met or the queues are empty
3. Services all other low-priority queues and needs that exceed the minimum bandwidth

### Scheduler Drop-Profile Maps

Drop-profile maps associate drop profiles with a scheduler. A drop-profile map sets the drop profile for a specific packet loss priority (PLP) and protocol type:

- PLP—Low, medium-high, high. You configure the PLP during classifier configuration. When you use a scheduler map to associate a forwarding class with a scheduler, you can use a drop-profile map to map different drop profiles to the forwarding class for different PLPs.
- Protocol type—Drop profiles match all protocol types.

### Buffer Size

Most of the total system buffer space is divided into two buffer pools, shared buffers and dedicated buffers. Shared buffers are a global pool that the ports share dynamically as needed. Dedicated buffers are a reserved portion of the buffer pool that is distributed evenly to all of the ports. Each port receives an equal allocation of dedicated buffer space. The dedicated buffer allocation to ports is not configurable because it is reserved for the ports.

The queue buffers are allocated from the dedicated buffer pool assigned to the port. By default, ports divide their allocation of dedicated buffers among the egress queues in the same proportion as the default scheduler sets the minimum guaranteed transmission rates (**transmit-rate**) for traffic. Only the queues included in the default scheduler receive dedicated buffers.



If you do not use the default configuration, you can explicitly configure the queue buffer size in either of two ways:

- As a percentage—The queue receives the specified percentage of dedicated port buffers when the queue is mapped to the scheduler and the scheduler is mapped to a port.
- As a remainder—After the port services the queues that have an explicit percentage buffer size configuration, the remaining port dedicated buffer space is divided equally among the other queues to which a scheduler is attached. (No default or explicit scheduler means no dedicated buffer allocation for the queue.) If you configure a scheduler and you do not specify a buffer size as a percentage, *remainder* is the default setting.



**NOTE:** The total of all of the explicitly configured buffer size percentages for all of the queues on a port cannot exceed 100 percent.

---

For a complete discussion about queue buffer configuration in the context of ingress and egress port buffer configuration, see [“Understanding CoS Buffer Configuration” on page 4914](#).

### Scheduler Maps

---

A scheduler map associates a specified forwarding class with a scheduler configuration. After configuring a scheduler, you must include it in a scheduler map, associate the scheduler map with a traffic control profile, and then associate the traffic control profile with an interface and a forwarding class set.

You can associate up to four user-defined scheduler maps with traffic control profiles.

#### Related Documentation

- [Understanding Junos CoS Components on page 4827](#)
- [Understanding CoS Priority Group Scheduling on page 4883](#)
- [Understanding CoS Hierarchical Port Scheduling \(ETS\) on page 4872](#)
- [Understanding CoS Buffer Configuration on page 4914](#)
- [Understanding CoS Scheduling Behavior and Configuration Considerations on page 4892](#)
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Minimum Guaranteed Output Bandwidth on page 5040](#)
- [Example: Configuring Maximum Output Bandwidth on page 5044](#)
- [Example: Configuring Queue Scheduling Priority on page 5035](#)
- [Example: Configuring Queue Schedulers on page 5030](#)
- [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)
- [Example: Configuring Tail-Drop Profiles on page 5019](#)
- [Example: Configuring Drop Profile Maps on page 5022](#)



## Understanding CoS Priority Group Scheduling

Priority group scheduling defines the class-of-service (CoS) properties of a group of output queues (priorities). Priority group scheduling works with output queue scheduling to create a two-tier hierarchical scheduler. The hierarchical scheduler allocates bandwidth to a group of queues (a priority group, called a forwarding class set in Junos OS configuration). Queue scheduling determines the portion of the priority group bandwidth that the particular queue can use.

You configure priority group scheduling in a traffic control profile and then associate the traffic control profile with a forwarding class set and an interface. You attach a scheduler map to the traffic control profile to specify the queue scheduling characteristics.



**NOTE:** When you configure bandwidth for a queue or a priority group, the switch considers only the data as the configured bandwidth. The switch does not account for the bandwidth consumed by the preamble and the interframe gap (IFG). Therefore, when you calculate and configure the bandwidth requirements for a queue or for a priority group, consider the preamble and the IFG as well as the data in the calculations.

- [Priority Group Scheduling Components on page 4883](#)
- [Default Traffic Control Profile on page 4884](#)
- [Guaranteed Rate \(Minimum Guaranteed Bandwidth\) on page 4884](#)
- [Sharing Extra Bandwidth on page 4884](#)
- [Shaping Rate \(Maximum Bandwidth\) on page 4885](#)
- [Scheduler Maps on page 4885](#)

### Priority Group Scheduling Components

[Table 395 on page 4883](#) provides a quick reference to the traffic control profile components you can configure to determine the bandwidth properties of priority groups, and [Table 396 on page 4884](#) provides a quick reference to some related scheduling configuration components.

**Table 395: Priority Group Scheduler Components**

Traffic Control Profile Component	Description
Guaranteed rate	Sets the minimum guaranteed port bandwidth for the priority group. Extra port bandwidth is shared among priority groups in proportion to the guaranteed rate of each priority group on the port.
Shaping rate	Sets the maximum port bandwidth the priority group can consume.
Scheduler map	Maps schedulers to queues (forwarding classes, also called priorities). This determines the portion of the priority group bandwidth that a queue receives.



Table 396: Other Scheduling Components

Other Scheduling Components	Description
Forwarding class	Maps traffic to a queue (priority).
Forwarding class set	Name of a priority group. You map forwarding classes to priority groups. A forwarding class set consists of one or more forwarding classes.
Scheduler	Sets the bandwidth and scheduling priority of individual queues (forwarding classes).

### Default Traffic Control Profile

There is no default traffic control profile.

### Guaranteed Rate (Minimum Guaranteed Bandwidth)

The guaranteed rate determines the minimum guaranteed bandwidth for each priority group. It also determines how much excess (extra) port bandwidth the priority group can share; each priority group shares extra port bandwidth in proportion to its guaranteed rate. You specify the rate in bits per second as a fixed value such as 3 Mbps or as a percentage of the total port bandwidth.

The minimum transmission bandwidth can exceed the configured rate if additional bandwidth is available from other priority groups on the port. In case of congestion, the configured guaranteed rate is guaranteed for the priority group. This property enables you to ensure that each priority group receives the amount of bandwidth appropriate to its level of service.



**NOTE:** Configuring the minimum guaranteed bandwidth (transmit rate) for a forwarding class does not work unless you also configure the minimum guaranteed bandwidth (guaranteed rate) for the forwarding class set in the traffic control profile.

Additionally, the sum of the transmit rates of the queues in a forwarding class set should not exceed the guaranteed rate for the forwarding class set. (You cannot guarantee a minimum bandwidth for the queues that is greater than the minimum bandwidth guaranteed for the entire set of queues.)

You cannot configure a guaranteed rate for forwarding class sets that include strict-high priority queues.

### Sharing Extra Bandwidth

Extra bandwidth is available to priority groups when the priority groups do not use the full amount of available port bandwidth. This extra port bandwidth is shared among the priority groups based on the minimum guaranteed bandwidth of each priority group.



For example, Port A has three priority groups: fc-set-1, fc-set-2, and fc-set-3. Fc-set-1 has a guaranteed rate of 2 Gbps, fc-set-2 has a guaranteed rate of 2 Gbps, and fc-set-3 has a guaranteed rate of 4 Gbps. After servicing the minimum guaranteed bandwidth of these priority groups, the port has an extra 2 Gbps of available bandwidth, and all three priority groups have still have packets to forward. The priority groups receive the extra bandwidth in proportion to their guaranteed rates, so fc-set-1 receives an extra 500 Mbps, fc-set-2 receives an extra 500 Mbps, and fc-set-3 receives an extra 1 Gbps.

### Shaping Rate (Maximum Bandwidth)

The shaping rate determines the maximum bandwidth the priority group can consume. You specify the rate in bits per second as a fixed value such as 5 Mbps or as a percentage of the total port bandwidth.

The maximum bandwidth for a priority group depends on the total bandwidth available on the port and how much bandwidth the other priority groups on the port consume.

### Scheduler Maps

A scheduler map maps schedulers to queues. When you associate a scheduler map with a traffic control profile, then associate the traffic control profile with an interface and a forwarding class set, the scheduling defined by the scheduler map determines the portion of the priority group resources that each individual queue can use.

You can associate up to four user-defined scheduler maps with traffic control profiles.

#### Related Documentation

- [Understanding Junos CoS Components on page 4827](#)
- [Understanding CoS Output Queue Schedulers on page 4876](#)
- [Understanding CoS Hierarchical Port Scheduling \(ETS\) on page 4872](#)
- [Understanding CoS Scheduling Behavior and Configuration Considerations on page 4892](#)
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Minimum Guaranteed Output Bandwidth on page 5040](#)
- [Example: Configuring Maximum Output Bandwidth on page 5044](#)
- [Example: Configuring Queue Schedulers on page 5030](#)
- [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)
- [Example: Configuring Tail-Drop Profiles on page 5019](#)
- [Example: Configuring Drop Profile Maps on page 5022](#)



## Understanding CoS Traffic Control Profiles

A traffic control profile defines the output bandwidth and scheduling characteristics of forwarding class sets (priority groups). The forwarding classes (queues) mapped to a forwarding class set share the bandwidth that you assign to the forwarding class set in the traffic control profile.

This two-tier hierarchical scheduling architecture provides flexibility in allocating resources among queues and:

- Assigns a portion of port bandwidth to a priority group. You define the port resources for the priority group in a traffic control profile.
- Allocates priority group bandwidth among the queues that belong to the priority group. A scheduler map attached to the traffic control profile defines the amount of the priority group's resources that each queue can use.

Attaching a priority group and traffic control profile to a port defines the hierarchical scheduling properties of the group and the queues that belong to the group.

The ability to create priority groups supports enhanced transmission selection (ETS, described in IEEE 802.1Qaz). When a priority group does not use its allocated port bandwidth, ETS shares the excess port bandwidth among other priority groups on the port in proportion to their guaranteed minimum bandwidth (guaranteed rate). This utilizes the port bandwidth better than scheduling schemes that require setting strict priorities that reserve bandwidth for all groups whether it is needed or not. ETS allows traffic groups that need extra bandwidth to use it if the bandwidth is available, while preserving the ability to specify the minimum guaranteed bandwidth for traffic groups.

Traffic control profiles define the following CoS properties for priority groups:

- Minimum guaranteed bandwidth—Also known as the committed information rate (CIR). This is the minimum amount of port bandwidth the priority group receives. Priorities in the priority group receive their minimum guaranteed bandwidth as a portion of the priority group's minimum guaranteed bandwidth. The **guaranteed-rate** statement defines the minimum guaranteed bandwidth.



**NOTE:** You cannot apply a traffic control profile with a minimum guaranteed bandwidth to a priority group that includes strict-high priority queues.

---

- Shared excess (extra) bandwidth—When the priority groups on a port do not consume the full amount of bandwidth allocated to them or there is unallocated link bandwidth available, priority groups can contend for that extra bandwidth if they need it. Priorities in the priority group contend for extra bandwidth as a portion of the priority group's extra bandwidth. The amount of extra bandwidth for which a priority group can contend is proportional to the priority group's guaranteed minimum bandwidth (guaranteed rate).



- **Maximum bandwidth**—Also known as peak information rate (PIR). This is the maximum amount of port bandwidth the priority group receives. Priorities in the priority group receive their maximum bandwidth as a portion of the priority group's maximum bandwidth. The **shaping-rate** statement defines the maximum bandwidth.
- **Queue scheduling**—Each traffic control profile includes a scheduler map. The scheduler map maps priorities (forwarding classes) to schedulers to define the scheduling characteristics of the individual priorities in the priority group. The resources scheduled for each priority represent portions of the resources that the traffic control profile schedules for the entire priority group, not portions of the total link bandwidth. The **scheduler-maps** statement defines the mapping of forwarding classes to schedulers.

#### Related Documentation

- [Understanding CoS Hierarchical Port Scheduling \(ETS\) on page 4872](#)
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)
- [Defining CoS Traffic Control Profiles \(Priority Group Scheduling\) on page 5143](#)

## Understanding CoS Priority Group and Queue Guaranteed Rates (Minimum Bandwidth)

You can set a guaranteed minimum bandwidth for individual forwarding classes (queues) and for groups of forwarding classes called forwarding class sets (priority groups). Setting a minimum guaranteed bandwidth ensures that priority groups and queues receive the bandwidth required to support the expected traffic.

This topic covers:

- [Guaranteeing Bandwidth Using Hierarchical Scheduling on page 4887](#)
- [Priority Group Guaranteed Rate \(Minimum Bandwidth\) on page 4889](#)
- [Queue Transmit Rate \(Minimum Bandwidth\) on page 4889](#)

### Guaranteeing Bandwidth Using Hierarchical Scheduling


The **guaranteed-rate** value for the priority group defines the minimum amount of bandwidth allocated to a forwarding class set on a port, whereas the **transmit-rate** value of the queue defines the minimum amount of bandwidth allocated to a particular queue in a priority group. The queue bandwidth is a portion of the priority group bandwidth.



**NOTE:** You cannot configure a minimum guaranteed bandwidth (transmit rate) for a forwarding class that is mapped to a strict-high priority queue, and you cannot configure a minimum guaranteed bandwidth (guaranteed rate) for a priority group that includes strict-high priority queues.

[Figure 182 on page 4888](#) shows how the total port bandwidth is allocated to priority groups (forwarding class sets) based on the guaranteed rate of each priority group. It also shows how the guaranteed bandwidth of each priority group is allocated to the queues in the priority group based on the transmit rate of each queue.

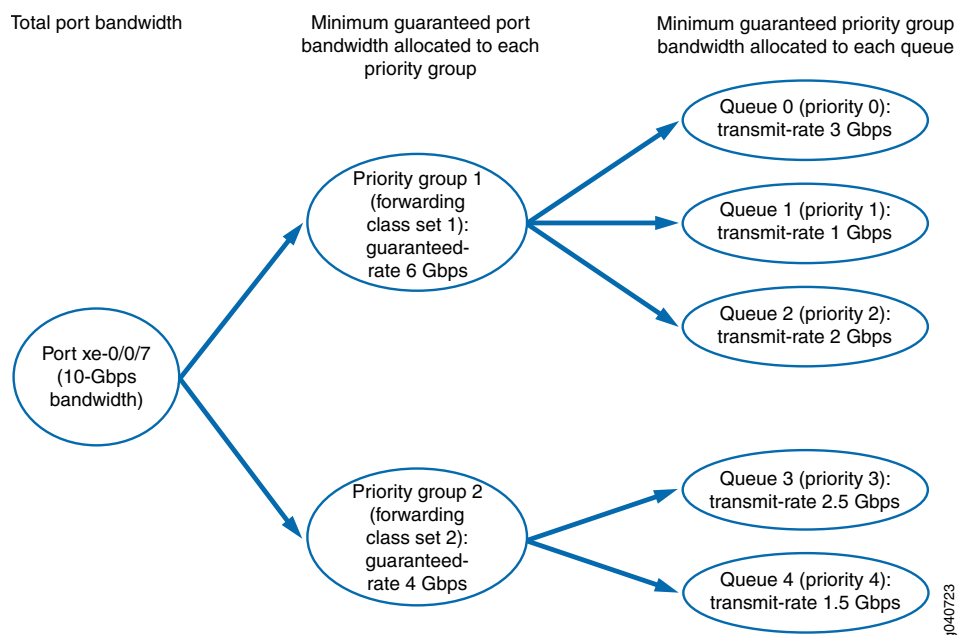

**Figure 182: Allocating Guaranteed Bandwidth Using Hierarchical Scheduling**

The sum of the priority group guaranteed rates cannot exceed the total port bandwidth. If you configure guaranteed rates whose sum exceeds the port bandwidth, the system sends a syslog message to notify you that the configuration is not valid. However, the system does not perform a commit check. If you commit a configuration in which the sum of the guaranteed rates exceeds the port bandwidth, the hierarchical scheduler behaves unpredictably.

The sum of the queue transmit rates cannot exceed the total guaranteed rate of the priority group to which the queues belong. If you configure transmit rates whose sum exceeds the priority group guaranteed rate, the commit check fails and the system rejects the configuration.





**NOTE:** You must set both the priority group **guaranteed-rate** value and the queue **transmit-rate** value in order to configure the minimum bandwidth for individual queues. If you set the **transmit-rate** value but do not set the **guaranteed-rate** value, the configuration fails.

You can set the **guaranteed-rate** value for a priority group without setting the **transmit-rate** value for individual queues in the priority group. However, queues that do not have a configured **transmit-rate** value can become starved for bandwidth if other higher-priority queues need the priority group's bandwidth. To avoid starving a queue, it is a good practice to configure a **transmit-rate** value for most queues.

If you configure the guaranteed rate of a priority group as a percentage, configure all of the transmit rates associated with that priority group as percentages. In this case, if any of the transmit rates are configured as absolute values instead of percentages, the configuration is not valid and the system sends a syslog message.

### Priority Group Guaranteed Rate (Minimum Bandwidth)

Setting a priority group **guaranteed-rate** enables you to reserve a portion of the port bandwidth for the forwarding classes (queues) in that forwarding class set. The minimum bandwidth (**guaranteed-rate**) that you configure for a priority group sets the minimum bandwidth available to all of the forwarding classes in the forwarding class set.

The combined **guaranteed-rate** value of all of the forwarding class sets associated with an interface cannot exceed the amount of bandwidth available on that interface.

You configure the priority group **guaranteed-rate** in the traffic control profile. You cannot apply a traffic control profile that has a guaranteed rate to a priority group that includes strict-high priority queues.

### Queue Transmit Rate (Minimum Bandwidth)

Setting a queue **transmit-rate** enables you to reserve a portion of the priority group bandwidth for the individual queue. For example, a queue that handles Fibre Channel over Ethernet (FCoE) traffic might require a minimum rate of 4 Gbps to ensure the class of service that storage area network (SAN) traffic requires.

The priority group **guaranteed-rate** sets the aggregate minimum amount of bandwidth available to the queues that belong to the priority group. The cumulative total minimum bandwidth the queues consume cannot exceed the minimum bandwidth allocated to the priority group to which they belong. (The combined transmit rates of the queues in a priority group cannot exceed the priority group's guaranteed rate.)

You must configure the **guaranteed-rate** value of the priority group in order to set a **transmit-rate** value for individual queues that belong to the priority group. The reason is that if there is no guaranteed bandwidth for a priority group, there is no way to guarantee bandwidth for queues in that priority group.



You configure the queue **transmit-rate** in the scheduler configuration. You cannot configure a transmit rate for strict-high priority queues.

**Related  
Documentation**

- [Understanding CoS Output Queue Schedulers on page 4876](#)
- [Understanding CoS Traffic Control Profiles on page 4886](#)
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Queue Schedulers on page 5030](#)
- [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)
- [Defining CoS Queue Schedulers on page 5139](#)
- [Defining CoS Traffic Control Profiles \(Priority Group Scheduling\) on page 5143](#)

## Understanding CoS Priority Group Shaping and Queue Shaping (Maximum Bandwidth)

If the amount of traffic on an interface exceeds the maximum bandwidth of the interface, it leads to congestion. You can use priority group (forwarding class set) shaping and queue shaping to manage the excess traffic and avoid congestion.

The maximum bandwidth sets the most bandwidth a priority group or a queue can use after all of the priority group and queue minimum bandwidth requirements are met, even if more bandwidth is available.

This topic covers:

- [Priority Group Shaping on page 4890](#)
- [Queue Shaping on page 4890](#)
- [Shaping Maximum Bandwidth Using Hierarchical Scheduling on page 4891](#)

### Priority Group Shaping

---

Priority group shaping enables you to shape the aggregate traffic of a forwarding class set on a port to a maximum rate that is less than the line or port rate. The maximum bandwidth (**shaping-rate**) that you configure for a priority group sets the maximum bandwidth available to all of the forwarding classes (queues) in the forwarding class set.

If a port has more than one priority group and the combined **shaping-rate** value of the priority groups is greater than the amount of port bandwidth available, the bandwidth is shared proportionally among the priority groups.

You configure the priority group **shaping-rate** in the traffic control profile.

### Queue Shaping

---

Queue shaping throttles the rate at which queues transmit packets. For example, using queue shaping, you can rate-limit a strict-high priority queue so that the strict-priority queue does not lock out (or starve) low-priority queues. Similarly, for any queue, you can configure queue shaping (**shaping-rate**) to set the maximum bandwidth for a particular queue.



The **shaping-rate** value of the priority group sets the aggregate maximum amount of bandwidth available to the queues that belong to the priority group. The cumulative total bandwidth the queues consume cannot exceed the maximum bandwidth of the priority group to which they belong on a port.

If a priority group has more than queue and the combined **shaping-rate** value of the queues is greater than the amount of bandwidth available to the priority group, the bandwidth is shared proportionally among the queues.


You configure the queue **shaping-rate** in the scheduler configuration.

### Shaping Maximum Bandwidth Using Hierarchical Scheduling

Priority group shaping defines the maximum bandwidth allocated to a forwarding class set on a port, whereas queue shaping defines a limit on maximum bandwidth usage per queue. The queue bandwidth is a portion of the priority group bandwidth.

Figure 183 on page 4891 shows how the port bandwidth is allocated to priority groups (forwarding class sets) based on the shaping rate of each priority group, and how the bandwidth of each priority group is allocated to the queues in the priority group based on the shaping rate of each queue.

**Figure 183: Setting Maximum Bandwidth Using Hierarchical Scheduling**

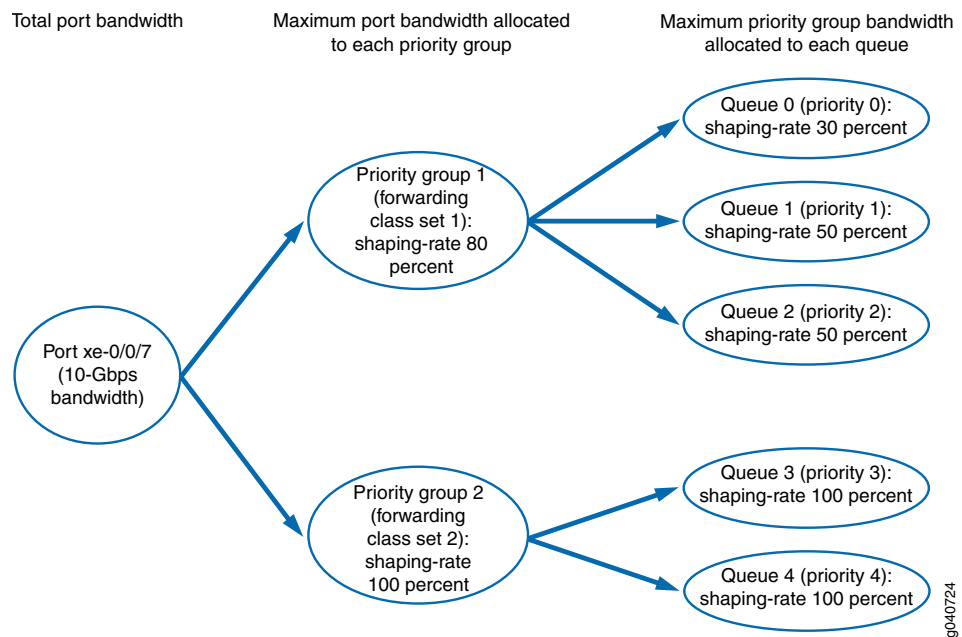

#### Related Documentation

- [Understanding CoS Output Queue Schedulers on page 4876](#)
- [Understanding CoS Traffic Control Profiles on page 4886](#)
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Queue Schedulers on page 5030](#)
- [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)



- [Defining CoS Queue Schedulers on page 5139](#)
- [Defining CoS Traffic Control Profiles \(Priority Group Scheduling\) on page 5143](#)

## Understanding CoS Scheduling Behavior and Configuration Considerations

Many factors affect scheduling configuration and bandwidth requirements, including:

- When you configure bandwidth for a queue or a priority group, the switch considers only the data as the configured bandwidth. The switch does not account for the bandwidth consumed by the preamble and the interframe gap (IFG). Therefore, when you calculate and configure the bandwidth requirements for a queue or for a priority group, consider the preamble and the IFG as well as the data in the calculations.
- When you define a forwarding class that will be used on the switch (the behavior aggregate classifier has a forwarding class and you expect traffic for the forwarding class), you must also define a scheduling policy for the forwarding class. Defining a scheduling policy means:
  - Mapping a scheduler to the forwarding class in a scheduler map
  - Including the forwarding class in a forwarding class set
  - Associating the scheduler map with a traffic control profile
  - Attaching the traffic control profile to a forwarding class set and an interface
- On each physical interface, either all forwarding classes that are being used on the interface must have rewrite rules configured, or no forwarding classes that are being used on the interface can have rewrite rules configured. On any physical port, do not mix forwarding classes with rewrite rules and forwarding classes without rewrite rules.
- For packets that carry both an inner VLAN tag and an outer VLAN tag, the rewrite rule rewrites only the outer VLAN tag.
- Configuring the minimum guaranteed bandwidth (**transmit-rate**) for a queue (forwarding class) does not work unless you also configure the minimum guaranteed bandwidth (**guaranteed-rate**) for the priority group (forwarding class set) in the traffic control profile.

Additionally, the sum of the transmit rates of the queues in a forwarding class set should not exceed the guaranteed rate for the forwarding class set. (You cannot guarantee a minimum bandwidth for the queues that is greater than the minimum bandwidth guaranteed for the entire set of queues.) If you configure transmit rates whose sum exceeds the guaranteed rate of the forwarding class set, the commit check fails and the system rejects the configuration.

- The sum of the priority group guaranteed rates cannot exceed the total port bandwidth. If you configure guaranteed rates whose sum exceeds the port bandwidth, the system sends a syslog message to notify you that the configuration is not valid. However, the system does not perform a commit check. If you commit a configuration in which the sum of the guaranteed rates exceeds the port bandwidth, the hierarchical scheduler behaves unpredictably.



- If you configure the **guaranteed-rate** of a priority group as a percentage, configure all of the transmit rates associated with that priority group as percentages. In this case, if any of the transmit rates are configured as absolute values instead of percentages, the configuration is not valid and the system sends a syslog message.
- There are several factors to consider if you want to configure strict-high priority queues:
  - You cannot configure a minimum guaranteed bandwidth (**transmit-rate**) for a strict-high priority queue. You cannot configure a minimum guaranteed bandwidth (**guaranteed-rate**) for a forwarding class set that includes a strict-high priority queue.
  - You must create a separate forwarding class set for the strict-high priority queue.
  - Only one forwarding class set can contain strict-high priority queues.
  - Strict-high priority queues cannot belong to the same forwarding class set as queues that are not strict-high priority.
  - A strict-high priority queue cannot belong to a multidestination forwarding class set.
- In QFabric systems, if any queue that contains outgoing packets does not transmit packets for 12 consecutive seconds, the port automatically resets. Failure of a queue to transmit packets for 12 consecutive seconds may be due to:
  - A strict-high priority queue consuming all of the port bandwidth
  - Several queues consuming all of the port bandwidth
  - Any queue or port receiving continuous priority-based flow control (PFC) or 802.3x Ethernet PAUSE messages (received PFC and PAUSE messages prevent a queue or a port, respectively, from transmitting packets because of network congestion)
  - Other conditions that prevent a queue from obtaining port bandwidth for 12 consecutive seconds

If the cause is a strict-high priority queue consuming all of the port bandwidth, you can use rate shaping to configure a maximum rate for the strict-high priority queue and prevent it from using all of the port bandwidth. To configure rate shaping, include the **shaping-rate (rate | percent percentage)** statement at the **[edit class-of-service schedulers scheduler-name]** hierarchy level and apply the shaping rate to the strict-high priority scheduler.

If several queues consume all of the port bandwidth, you can use a scheduler to rate shape those queues and prevent them from using all of the port bandwidth.

- For transmit rates below 1 Gbps, we recommend that you configure the transmit rate as a percentage instead of as a fixed rate. This is because the system converts fixed rates into percentages and may round small fixed rates to a lower percentage. For example, a fixed rate of 350 Mbps is rounded down to 3 percent instead of 3.5 percent.
- When you set the maximum bandwidth for a queue or for a priority group (**shaping-rate**) at 100 Kbps or lower, the traffic shaping behavior is accurate only within +/– 20 percent of the configured **shaping-rate**.
- Queues might not receive the egress bandwidth configured in the queue scheduler when a port's egress queues are congested. This can occur when the ingress port buffer fills above a certain threshold. If this happens, configure a drop profile for the queue



on the port that is receiving its configured bandwidth (this queue is preventing the other queues on the port from receiving their configured bandwidth). The drop profile applies a weighted random early detection (WRED) algorithm to the queue and prevents the queue from affecting the other queues on the port.

- On an ingress port, do not configure classifiers that map the same IEEE 802.1p code point to both a multdestination traffic flow and a lossless unicast traffic flow (such as the default lossless **fcoe** or **no-loss** forwarding classes). Any code point used for multdestination traffic on a port should not be used to classify unicast traffic into a lossless forwarding class on the same port. If a multdestination traffic flow and a lossless unicast traffic flow use the same code point on a port, the multdestination traffic is treated the same way as the lossless traffic. For example, if priority-based flow control (PFC) is applied to the lossless traffic, the multdestination traffic of the same code point is also paused. During periods of congestion, treating multdestination traffic the same as lossless unicast traffic can create head-of-line (HOL) blocking for the multdestination traffic and affect the multdestination traffic on all of the egress ports the multdestination traffic uses.

For example, the following configuration can cause HOL blocking for the multdestination flow:

1. For unicast traffic, IEEE 802.1p code point 011 is classified into the **fcoe** forwarding class:

```
user@switch# set class-of-service classifiers ieee-802.1 ucast-cl forwarding-class fcoe  
loss-priority low code-points 011
```

2. For multdestination traffic, IEEE 802.1p code point 011 is classified into the **mcast** forwarding class:

```
user@switch# set class-of-service classifiers ieee-802.1 mcast-cl forwarding-class mcast  
loss-priority low code-points 011
```

3. The unicast classifier that maps traffic with code point 011 to the **fcoe** forwarding class is mapped to interface **xe-0/0/1**:

```
user@switch# set class-of-service interfaces xe-0/0/1 unit 0 classifiers ieee-802.1 ucast-cl
```

4. The multdestination classifier that maps traffic with code point 011 to the **mcast** forwarding class is mapped to all interfaces (multdestination traffic maps to all interfaces and cannot be mapped to individual interfaces):

```
user@switch# set class-of-service multi-destination classifiers ieee-802.1 mcast-cl
```

Because the same code point (011) maps unicast traffic to a lossless traffic flow and also maps multdestination traffic to a multdestination traffic flow, the multdestination traffic flow might experience HOL blocking during periods of congestion.

To avoid HOL blocking, do not map the code point used by the multdestination traffic to lossless unicast traffic. For example:



1. Instead of classifying code point **011** into the **fcoe** forwarding class, classify code point **011** into the **best-effort** forwarding class:

```
user@switch# set class-of-service classifiers ieee-802.1 ucast-cl forwarding-class  
best-effort loss-priority low code-points 011
```

2. user@switch# set class-of-service classifiers ieee-802.1 mcast-cl forwarding-class mcast  
loss-priority low code-points 011

3. user@switch# set class-of-service interfaces xe-0/0/1 unit 0 classifiers ieee-802.1 ucast-cl

4. user@switch# set class-of-service multi-destination classifiers ieee-802.1 mcast-cl

Because the code point **011** does not map unicast traffic to a lossless traffic flow, the multidestination traffic flow does not experience HOL blocking during periods of congestion.

The best practice is to classify unicast traffic with IEEE 802.1p code points that are also used for multidestination traffic into best-effort forwarding classes.

#### Related Documentation

- [Understanding CoS Output Queue Schedulers on page 4876](#)
- [Understanding CoS Priority Group Scheduling on page 4883](#)
- [Understanding CoS Hierarchical Port Scheduling \(ETS\) on page 4872](#)
- [Benefits of Configuring CoS Hierarchical Port Scheduling](#)
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)



## Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows

Junos OS Release 12.3 supports six lossless forwarding classes; each forwarding class is mapped to an IEEE 802.1p code point (priority). Earlier Junos OS software releases supported two lossless forwarding classes, the *fcoe* and *no-loss* forwarding classes, which are mapped by default to IEEE 802.1p priorities 3 (code point 011) and 4 (code point 100), respectively. Junos OS Release 12.3 also introduces a new output stanza in the congestion notification profile (CNP) to configure priority-based flow control (PFC) on output queues.

The default configuration is the same as the default configuration in Junos OS Release 12.2 and is backward-compatible. If you need only two (or fewer) lossless forwarding classes, use the default configuration.

The increased support for lossless transport includes:

- Configuring up to six lossless forwarding classes
- Configuring PFC pause on output queues to program the output queues that can respond to PFC pause messages received from the connected peer. The priorities you pause on output queues must match the priorities on which you enable PFC on the corresponding ingress interfaces. For example, if you program output queues to pause priorities 3 (011) and 5 (101), then you must also enable pause on priorities 3 and 5 on the corresponding ingress interfaces. Configuring flow control on the output queues and enabling PFC on the corresponding input queues allows you to pause up to six priorities (forwarding classes).
- Controlling the headroom buffer on Ethernet interfaces by configuring the maximum receive unit (MRU) size for the traffic mapped to an IEEE 802.1p priority (configured per priority) and the length of the attached cable (configured per interface). The MRU size can range up to full Jumbo packet size (9216 bytes).
- Remapping (rewriting) IEEE 802.1p priorities on native Fibre Channel (FC) interfaces when the system is acting as an FCoE-FC gateway. If the Ethernet (FCoE) network uses a different IEEE 802.1p priority than priority 3 (011) for FCoE traffic, then you can use priority remapping to classify FCoE traffic into a lossless forwarding class mapped to that different priority (see [“Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway” on page 4911](#)).

Lossless transport still requires configuring previously existing features, including enabling PFC on the lossless priorities on ingress interfaces, and configuring classifiers to classify incoming traffic into lossless forwarding classes based on the IEEE 802.1p priority tag of the packet.



**NOTE:** If you expect a large amount of lossless traffic on your network and configure multiple lossless traffic classes, ensure that you reserve enough scheduling resources (bandwidth) to support the lossless flows.

---

- [Default Lossless Priority Configuration on page 4897](#)



- [Configuring Lossless Priorities on page 4899](#)
- [Backward Compatibility with Junos OS Releases Earlier Than Release 12.3 on page 4909](#)
- [Configuration Rules and Recommendations on page 4910](#)

### Default Lossless Priority Configuration

If you do not explicitly configure lossless forwarding classes, the system uses the default forwarding class configuration. Forwarding classes are global on the QFX Series and are not configured per-interface, so any changes to forwarding classes apply to all interfaces on the device.

If you do not explicitly configure classifiers and flow control to pause output queues (configured in the output stanza of the CNP), the default classifier and the default output queue pause configuration are applied to all interfaces on the QFX Series. You can override the default classifier and the default output queue pause configuration on a per-interface basis by applying an explicit configuration to an interface. The default configuration is used on all interfaces that do not have an explicit configuration.



**NOTE:** If you do not configure flow control on output queues, the default configuration uses a one-to-one mapping of IEEE 802.1p code points (priorities) to output queues by number. For example, priority 0 (code point 000) is mapped to queue 0, priority 1 (code point 001) is mapped to queue 1, and so on. If you do not use the default configuration, you must explicitly configure flow control on each output queue that you want to enable for PFC pause.

In the default configuration, only queue 3 and queue 4 are enabled to respond to pause messages from the connected peer. For queue 3 to respond to pause messages, priority 3 (code point 011) must be enabled for PFC in the input stanza. For queue 4 to respond to pause messages, priority 4 (code point 100) must be enabled for PFC in the input stanza.

The default configuration is the same as the default configuration in earlier software releases, and has the same lossless behavior:

- There are two lossless forwarding classes (the no-loss packet drop attribute is applied automatically):  
fcoe—Mapped to output queue 3  
no-loss—Mapped to output queue 4
- A classifier maps the fcoe forwarding class to IEEE 802.1p priority 3 (011) and the no-loss forwarding class to IEEE 802.1p priority 4 (100)
- Flow control (PFC) is enabled on Ethernet interface output queues 3 and 4 when those queues carry lossless traffic (traffic mapped to the fcoe and no-loss forwarding classes, respectively). In Junos OS software releases earlier than Release 12.3, output queue flow control was not user-configurable.

Flow control is enabled on native FC interface (NP\_Port) output queue 3 (IEEE 802.1p priority 3) for FCoE/FC traffic



- PFC must be enabled explicitly on the lossless IEEE 802.1p priorities (code points) on ingress Ethernet interfaces; no default PFC configuration is applied at ingress interfaces. If you do not enable PFC on lossless priorities, those priorities might experience packet loss during periods of congestion.
- On Ethernet ports, PFC buffer calculations use the following default values to determine the headroom buffer size:  
Cable length—100 meters (approximately 328 feet)  
MRU for priority 3 traffic—2500 bytes  
MRU for priority 4 traffic—9216 bytes  
Maximum transmission unit (MTU)—1522 (or the configured MTU value for the interface)



**NOTE:** If you configure flow control on a priority that is not one of the default flow control priorities, the default MRU value is 2500 bytes. For example, if you configure flow control on priority 5 and you do not configure an MRU value, the default MRU value is 2500 bytes.

- DCBX is enabled on all interfaces in autonegotiation mode, and automatically exchanges FCoE application protocol type, length, and values (TLVs) on interfaces that carry FCoE traffic. If you explicitly configure DCBX protocol TLV exchange for any application, then you must explicitly configure every application for which you want DCBX to exchange TLVs, including FCoE.

The default CoS configuration is backward compatible with the *default* CoS configuration of previous software releases. If you explicitly configure lossless transport, ensure that the input and output queues corresponding to the lossless forwarding classes are explicitly configured for PFC pause.



**NOTE:** If you *explicitly* configured the lossless fcoe or no-loss forwarding classes before upgrading to Junos OS Release 12.3, those forwarding classes are *not* lossless after the upgrade to Release 12.3. To regain lossless behavior, you can delete the explicit configuration and use the default lossless forwarding classes, or you can use the no-loss packet drop attribute introduced in Junos OS Release 12.3 to configure the forwarding classes for lossless behavior.

Table 397 on page 4898 summarizes the default unicast forwarding classes and their mapping to output queues, IEEE 802.1p priorities, and drop attributes.

**Table 397: Mapping of Default Unicast Forwarding Class to Queue, IEEE 802.1p Priority, and Drop Attribute**

Forwarding Class Name	Output Queue	Priority	Drop Attribute
best-effort	0	0	drop
fcoe	3	3	no-loss



**Table 397: Mapping of Default Unicast Forwarding Class to Queue, IEEE 802.1p Priority, and Drop Attribute (*continued*)**

Forwarding Class Name	Output Queue	Priority	Drop Attribute
no-loss	4	4	no-loss
network-control	7	7	drop

There is one default multidestination forwarding class named *mcast* for multicast, broadcast, and destination lookup fail (DLF) traffic that is mapped to output queue 8 with a drop attribute of drop. (Incoming multidestination traffic on all IEEE 802.1p priorities is mapped to the *mcast* forwarding class by default.)

### Configuring Lossless Priorities

Configuring more than two lossless priorities (forwarding classes) or changing the default mapping of lossless forwarding classes to priorities and paused output queues requires explicit configuration. This includes configuring forwarding classes with the no-loss packet drop attribute, using a CNP to configure PFC on ingress interfaces and flow control (PFC) on egress interfaces, and configuring a classifier to map IEEE 802.1p priorities (code points) to the correct forwarding classes.

- [Configuring Lossless Forwarding Classes \(Packet Drop Attribute\) on page 4899](#)
- [Congestion Notification Profiles on page 4901](#)
- [Configuring Input Interface Flow Control \(PFC and Headroom Buffer Calculation\) on page 4901](#)
- [Configuring Output Interface Flow Control \(PFC\) on page 4902](#)
- [Configuring DCBX \(Application Protocol TLV Exchange\) on page 4904](#)
- [Fate Sharing Among Traffic Classes on page 4905](#)
- [Transit Switch Configuration Versus FCoE-FC Gateway Configuration on page 4906](#)
- [Configuration Results and Commit Checks on page 4907](#)

### Configuring Lossless Forwarding Classes (Packet Drop Attribute)

Junos OS Release 12.3 introduces the *no-loss* parameter for forwarding class configuration. (This is not the no-loss default forwarding class name. It is a packet drop attribute you can specify to configure any unicast forwarding class as a lossless forwarding class.)

You can configure up to six forwarding classes as lossless forwarding classes by including the **no-loss** drop attribute at the **[edit class-of-service forwarding-classes class forwarding-class-name queue-num queue-number]** hierarchy level.

If you do not explicitly configure the *fcoe* or *no-loss* forwarding classes, they include the no-loss drop attribute by default. If you explicitly configure the *fcoe* or *no-loss* forwarding classes and you want to retain their lossless behavior, you must include the no-loss drop attribute in the configuration.





**NOTE:** All forwarding classes mapped to the same output queue must have the same packet drop attribute. (All forwarding classes mapped to the same output queue must be either lossy or lossless. You cannot map a lossy and a lossless forwarding class to the same queue.)

To avoid fate sharing (different flows receiving the same CoS treatment), use a one-to-one mapping of lossless forwarding classes to IEEE 802.1p code points (priorities) and queues. (Each forwarding class should be mapped to a different queue and classified into a different priority.) The classifier attached to the interface determines the forwarding class to priority mapping.

The fcoe and no-loss forwarding classes are special cases because in the default configuration, they are configured for lossless behavior (providing that you also enable PFC on the priorities mapped to the fcoe and no-loss forwarding classes in the CNP input stanza).

[Table 398 on page 4900](#) provides a summary of the possible configurations of the fcoe and no-loss forwarding classes in Junos OS Release 12.3, and the result of those configurations in terms of lossless traffic behavior. It is assumed that PFC, DCBX, and classifiers are properly configured.

**Table 398: FCoE and No-Loss Forwarding Class Configuration in Junos OS Release 12.3**

Explicit or Default Forwarding Class Configuration	Packet Drop Attribute	Result and Notes
Default	Default	<p>The fcoe and no-loss forwarding classes are lossless.</p> <p><b>NOTE:</b> Even if you explicitly configure other forwarding classes (lossy or other lossless forwarding classes), the fcoe and no-loss forwarding classes are lossless because they are not explicitly configured.</p>
Explicit	Not specified in the explicit forwarding class configuration	The fcoe and no-loss forwarding classes are lossy because they do not include the no-loss drop attribute.
Explicit	No-loss	The fcoe and no-loss forwarding classes are lossless.



**Table 398: FCoE and No-Loss Forwarding Class Configuration in Junos OS Release 12.3 (*continued*)**

Explicit or Default Forwarding Class Configuration	Packet Drop Attribute	Result and Notes
Explicit, configured in Junos OS Release 12.2 or earlier	Not specified (packet drop attribute was not available before Junos OS Release 12.3)	<p>The fcoe and no-loss forwarding classes are lossy in Junos OS Release 12.3 because they do not include the no-loss drop attribute.</p> <p><b>NOTE:</b> To retain lossless behavior, delete the explicit configuration so that the system uses the default configuration before you upgrade to Junos OS Release 12.3, or configure the forwarding classes with the no-loss packet drop attribute after upgrading to Junos OS Release 12.3.</p>

For all other forwarding classes, you must explicitly configure lossless transport because the default configuration for all other forwarding classes is lossy.

#### ***Congestion Notification Profiles***

Use CNPs to configure lossless characteristics on input and output interfaces. Input CNPs enable PFC on specified IEEE 802.1p priorities (code points) and fine-tune headroom buffer settings on ingress interfaces. Output CNPs enable PFC on output queues for specified IEEE 802.1p priorities so that the queues can respond to PFC pause messages from the connected peer.

To achieve lossless transport, the priority paused at the ingress interfaces must match the priority paused at the egress interfaces for a given traffic flow. For example, if you configure ingress interfaces to pause traffic tagged with IEEE 802.1p priority 5 (code point 101) and priority 5 traffic is mapped to output queue 5, then you must also configure the corresponding output interfaces to pause priority 5 on queue 5. In addition, the forwarding class mapped to queue 5 must be configured as a lossless forwarding class (using the no-loss drop attribute).

#### ***Configuring Input Interface Flow Control (PFC and Headroom Buffer Calculation)***

On ingress Ethernet interfaces, input CNPs enable PFC on specified priorities. Input CNPs also fine-tune the headroom buffers used for PFC support if you do not want to use the default configuration.

Headroom buffers support lossless transport by storing the traffic that arrives at an interface after the interface sends a PFC flow control message to pause incoming traffic. Until the connected peer receives the flow control message and pauses traffic, the interface continues to receive traffic and must buffer it to prevent packet loss.

The system uses the MRU and the length of the attached physical cable to calculate buffer headroom allocation. The default configuration values are:

- MRU for priority 3 traffic—2500 bytes



- MRU for priority 4 traffic—9216 bytes
- Cable length—100 meters (approximately 328 feet)



**NOTE:** If you configure flow control on a priority that is not one of the default flow control priorities, the default MRU value is 2500 bytes. For example, if you configure flow control on priority 5 and you do not configure an MRU value, the default MRU value is 2500 bytes.

You can fine-tune the MRU and the cable length to adjust the size of the headroom buffer on an interface. The QFX Series has a shared global buffer pool and dynamically allocates headroom buffer space to lossless queues as needed.

A lower MRU or a shorter cable length reduces the amount of headroom buffer required on an interface and leaves more headroom buffer space for other interfaces. A higher MRU or a longer cable length increases the amount of headroom buffer space required on an interface and leaves less headroom buffer space for other interfaces.

In many cases, you can better utilize the headroom buffers by reducing the MRU value (for example, an MRU of 2180 is sufficient for most FCoE networks) and by reducing the cable length value if the physical cable is less than 100 meters long.



**NOTE:** When you configure the headroom buffers and commit the configuration, the system performs a commit check and rejects the configuration if sufficient headroom buffer space is not available.

However the system does not perform a commit check but instead returns a syslog error if:

- The buffers are configured on a LAG interface
- The default classifier is used on the interface (instead of a user-configured classifier)
- The interface has not been created

---

### ***Configuring Output Interface Flow Control (PFC)***

On Ethernet interfaces, you can use an output CNP to configure flow control on unicast output queues and enable PFC pause response on specified IEEE 802.1p priorities. By default, output queues 3 and 4 are enabled for PFC pause on priorities 3 (IEEE 802.1p code point 011) and 4 (IEEE 802.1p code point 100) to support the default lossless forwarding class configuration, which maps the fcoe forwarding class to queue 3 and priority 3, and maps the no-loss forwarding class to queue 4 and priority 4.

Configuring flow control on output queues enables you to pause any priority on any unicast output queue on any interface. This enables you to use more than two output queues to support lossless traffic flows (you can configure up to six lossless forwarding classes and map them to different output queues that are enabled for PFC pause).



Output queue flow control also enables you to support multiple lossless forwarding classes (each mapped to a different priority and output queue) for one class of traffic.

For example, if the converged Ethernet network uses two different priorities for FCoE traffic (for example, priority 3 and priority 5), then you can classify those priorities into different lossless forwarding classes that are mapped to different output queues by:

1. Configuring two lossless forwarding classes for FCoE traffic, with each forwarding class mapped to a different output queue. For example, you could use the default `fcoe` forwarding class, which is mapped to queue 3, and you could configure a second lossless forwarding class called `fcoe1` and map it to queue 5. The `fcoe` forwarding class is for priority 3 FCoE traffic (code point 011) and the `fcoe1` forwarding class is for priority 5 (code point 101) FCoE traffic.
2. Configuring a classifier that maps each forwarding class to the desired IEEE 802.1p code point (priority). If FCoE traffic on both priorities uses one interface, the classifier must classify both forwarding classes to the correct priorities. If FCoE traffic of different priorities uses different interfaces, the classifier configuration on each interface must map the correct priority to the corresponding lossless forwarding class.
3. Applying the classifier to the interfaces that carry FCoE traffic. The classifier determines the mapping of forwarding classes to priorities on each interface.

To configure lossless transport for these forwarding classes, you also need to:

- In the CNP input stanza, enable PFC on the two priorities at the ingress interfaces.
- In the CNP output stanza, configure flow control (PFC) on the output queues and priorities for the forwarding classes so that the interface can respond to pause messages received from the connected peer.
- Configure DCBX to exchange application protocol TLVs on both FCoE priorities.





**NOTE:** If you do not configure flow control to pause output queues, the default configuration uses a one-to-one mapping of IEEE 802.1p code points (priorities) to output queues by number. For example, priority 0 (code point 000) is mapped to queue 0, priority 1 (code point 001) is mapped to queue 1, and so on. By default, only queues 3 and 4 are enabled to respond to pause messages from the connected peer, and you must explicitly enable PFC on the corresponding priorities in the CNP input stanza to achieve lossless behavior.

If you do not use the default configuration, you must explicitly configure flow control on each output queue that you want to enable for PFC pause. For example, if you explicitly configure flow control on output queue 5, the default configuration is no longer valid and only output queue 5 is enabled for PFC pause. Output queues 3 and 4 are no longer enabled for PFC pause, so traffic using those queues no longer responds to PFC pause messages even if the corresponding forwarding class is configured with the no-loss drop attribute. To retain the pause configuration on output queues 3 and 4 and configure flow control on queue 5, you need to explicitly configure flow control on queues 3, 4, and 5.

You cannot configure flow control to pause a multidestination output queue. You can configure flow control to pause only unicast output queues.

### ***Configuring DCBX (Application Protocol TLV Exchange)***

DCBX exchanges the protocol TLVs for applications that require lossless transport with the connected peer interface. By default, DCBX advertises FCoE application protocol TLVs on all interfaces that are enabled for DCBX, and by default, DCBX is enabled on all interfaces. DCBX advertises no other applications by default.

For each application (for example, iSCSI) that you want to configure for lossless transport, you must enable the interfaces which carry that application traffic to exchange DCBX protocol TLVs with the connected peer. The TLV exchange allows the peer interfaces to negotiate a compatible configuration to support the application.

If you configure DCBX to advertise any application, the default DCBX advertisement is overridden, and DCBX advertises only the configured applications. If you want an interface to advertise only the FCoE application, you do not have to configure DCBX application protocol TLV exchange; instead, you can use the default configuration.

If you want DCBX to advertise other applications, you must explicitly configure an application map and apply it to the interfaces on which you want to exchange protocol TLVs for those applications. If you want to exchange FCoE application protocol TLVs in addition to other application protocol TLVs, you must also explicitly configure the FCoE application in the application map. [“Understanding DCBX Application Protocol TLV Exchange” on page 4472](#) describes how application mapping works.





**NOTE:** Lossless transport also requires that you enable PFC on the correct priority (IEEE 802.1p code point) on the ingress interfaces using an input CNP. If the priority you pause at the ingress interfaces is not mapped to queue 3 or queue 4 (the two output queues that are enabled for PFC pause flow control by default), then you must also enable the output queues that correspond to paused input priorities to pause using an output CNP.

### *Fate Sharing Among Traffic Classes*

You can configure different lossless (or lossy) traffic flows to share fate—that is, to receive the same CoS treatment.

Fate sharing is not desirable for IO/convergence. Instead of independent control of the fate of each flow, different types of flows receive the same treatment. Fate sharing is particularly undesirable for lossless flows, because if one flow experiences congestion and must be paused, that congestion can affect the other flow and cause head-of-line blocking even if the other flow is not experiencing congestion. If your network requires that all 802.1p priorities are lossless, you can achieve that by allowing some fate sharing among the 8 priorities by spreading them across up to 6 lossless forwarding classes.

If the number of lossless priorities is less than or equal to the number of configured lossless forwarding classes, then you can avoid fate sharing by configuring a one-to-one mapping of forwarding classes to IEEE 802.1p code points and output queues. (Each forwarding class should be mapped to a different output queue and classified to a different priority.)

If you want to configure different traffic flows to share fate, the QFX Series supports two fate-sharing configurations: mapping one forwarding class to more than one IEEE 802.1p code point (priority), and mapping two forwarding classes to the same output queue:

1. If you map one lossless forwarding class to more than one priority, the traffic tagged with each of the priorities uses the same forwarding class and the CoS properties associated with that forwarding class. For example, configuring a forwarding class called `fc1`, mapping it to queue 1, and mapping it to code points 101 and 110 using a classifier named `classify1` results in the traffic tagged with priorities 101 and 110 sharing fate:

```
user@switch# set class-of-service forwarding-classes class fc1 queue-num 1 no-loss
user@switch# set class-of-service classifiers ieee-802.1 classify1 forwarding class fc1
loss-priority low code-points 101
user@switch# set class-of-service classifiers ieee-802.1 classify1 forwarding class fc1
loss-priority low code-points 110
```

In this case, if the traffic mapped to either priority experiences congestion, both priorities are paused because they are mapped to the same forwarding class and are therefore treated similarly.

2. If you map multiple lossless forwarding classes to the same output queue, the traffic mapped to the forwarding classes uses the same output queue. This increases the amount of traffic the queue needs to buffer and forward, and can create congestion that affects all of the traffic flows that are mapped to the queue. For example,



configuring two forwarding classes called fc1 and fc2, mapping both forwarding classes to queue 1, and mapping the forwarding classes to code points 101 and 110 (respectively) using a classifier named classify1 results in the traffic tagged with priorities 101 and 110 sharing fate on the same output queue:

```
user@switch# set class-of-service forwarding-classes class fc1 queue-num 1 no-loss
user@switch# set class-of-service forwarding-classes class fc2 queue-num 1 no-loss
user@switch# set class-of-service classifiers ieee-802.1p classify1 forwarding class fc1
loss-priority low code-points 101
user@switch# set class-of-service classifiers ieee-802.1p classify1 forwarding class fc2
loss-priority low code-points 110
```

in this case, even though the two forwarding classes use different IEEE 802.1p priorities, if one forwarding class experiences congestion, it affects the other forwarding class. This is because if the output queue is paused because of congestion on either forwarding class, all traffic that uses that queue is paused. Since both forwarding classes are mapped to the queue, the traffic mapped to both forwarding classes is paused.



**NOTE:** If you map more than one forwarding class to a queue, all of the forwarding classes mapped to the same queue must have the same packet drop attribute (all of the forwarding classes must be lossy, or all of the forwarding classes mapped to a queue must be lossless).

---

### ***Transit Switch Configuration Versus FCoE-FC Gateway Configuration***

On a transit switch (all Ethernet ports) that forwards FCoE traffic (and potentially other traffic that requires lossless transport across the Ethernet network), the configuration of classifiers, lossless forwarding classes, DCBX, and PFC on ingress and egress interfaces to support lossless transport is as described in this document.

When the QFX Series acts as an FCoE-FC gateway, the system uses native FC interfaces to connect to the FC switch (or FCoE forwarder) at the FC network edge. You cannot apply CNPs to native FC interfaces, only to Ethernet interfaces.

The Ethernet interface configuration of classifiers, DCBX, and PFC on an FCoE-FC gateway is the same as the Ethernet interface configuration on a transit switch. The configuration of lossless forwarding classes is also the same.

However, supporting lossless transport on native FC interfaces requires that you rewrite the IEEE 802.1p priority value if your network uses any priority other than 3 (IEEE code point 011) for FCoE traffic. If your network uses priority 3 for FCoE traffic, you can and should use the default configuration on FC interfaces.

By default, native FC interfaces tag packets with priority 3 when they encapsulate the incoming FC packets in Ethernet. If your FCoE network uses a different priority than 3 for FCoE traffic, you need to rewrite the priority value to the value your network uses on the FC interface, classify the FCoE traffic to the correct priority on the Ethernet interfaces, and enable pause on the correct priority on the Ethernet interfaces, as described in [“Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway” on page 4911](#).



### Configuration Results and Commit Checks

Different configurations of forwarding classes and their drop attributes, classifiers, CNPs (flow control), and Ethernet PAUSE (IEEE 802.3X flow control) result in different system behaviors.

[Table 399 on page 4907](#) describes the results of the possible lossless transport configurations in each case. The assumption in the *Result* column is that the system's buffer headroom calculation resulted in a successful configuration.

However, if the system calculates that there is insufficient buffer space to support the configuration, a commit check prevents you from committing the configuration on an individual Ethernet interface. For LAG interfaces, the system does not issue a commit check error but instead issues a syslog message. After you configure lossless transport for a LAG interface, be sure to check the syslog messages to confirm that the commit was successful.

**Table 399: Results of Lossless Priority Configuration**

Classifier Configuration	Congestion Notification Profile Configuration	Ethernet PAUSE (IEEE 802.3X) Configuration	Result
None (default classifier)	None	None	System default configuration. You must configure a CNP to enable PFC on the fcoe and no-loss forwarding class IEEE 802.1p code points (011 and 100 respectively) to achieve lossless behavior.
Classifier with no lossless forwarding classes	None	None	No lossless traffic flows are configured; all traffic is best effort.
Classifier with at least one lossless forwarding class	None	None	Because there is no CNP attached to interfaces, PFC is not enabled on the code point of the lossless traffic and no headroom buffer is allocated to the lossless queue, so packets can drop during periods of congestion. This configuration does not achieve lossless behavior.
None (default classifier)	PFC enabled on the fcoe and no-loss forwarding class code points (priorities)	None	The default classifier classifies traffic into two lossless forwarding classes, fcoe and no-loss. The CNP enables PFC on both lossless forwarding classes, resulting in lossless behavior for traffic mapped to the fcoe and no-loss forwarding classes.



Table 399: Results of Lossless Priority Configuration (*continued*)

Classifier Configuration	Congestion Notification Profile Configuration	Ethernet PAUSE (IEEE 802.3X) Configuration	Result
None (default classifier)	None	Flow control enabled	The system calculates buffer headroom for the physical link based on the interface MTU and the default cable length. The system does not calculate buffer headroom for individual priorities (output queues). Because Ethernet PAUSE is enabled on the link instead of PFC being enabled on the lossless priorities, the entire link is paused during periods of congestion. This configuration results in lossless behavior for all of the forwarding classes on the link, but because all traffic is paused, this can cause greater overall network congestion.
Classifier with at least one lossless forwarding class	PFC enabled on the lossless forwarding class code points (priorities)	None	Headroom buffer allocated only to priorities that are mapped to the lossless forwarding classes and on which PFC is enabled. This configuration achieves lossless behavior for the lossless forwarding classes.
Classifier with no lossless forwarding classes	None	Flow control enabled	The system calculates buffer headroom for the physical link based on the interface MTU and the default cable length, and it pauses all traffic on the link during periods of congestion.
Classifier with at least one lossless forwarding class	None	Flow control enabled	The system calculates buffer headroom for the physical link based on the interface MTU and the default cable length, and it pauses all traffic on the link during periods of congestion.
Classifier with at least one lossless forwarding class	PFC enabled on the lossless forwarding class code points (priorities)	Flow control enabled on a different interface than the interface with the CNP	The system checks the available buffer space for both the PFC-enabled priorities and for the other link. If sufficient buffer space is available, the lossless forwarding classes configured with PFC on one interface and also all of the traffic on the link with Ethernet PAUSE enabled achieve lossless behavior.



**NOTE:** If you attempt to configure both PFC and Ethernet PAUSE on a link, the system returns a commit error. PFC and Ethernet PAUSE are mutually exclusive configurations on an interface.



### Backward Compatibility with Junos OS Releases Earlier Than Release 12.3

The addition of the **no-loss** packet drop attribute to forwarding class configuration means that when you upgrade from an earlier release to Junos OS Release 12.3, the new software might not preserve the lossless forwarding class configuration of the fcoe and no-loss forwarding classes.

If you used the default forwarding class configuration for the fcoe and no-loss forwarding classes, the CoS configuration is backward compatible. You do not have to do anything to preserve the lossless behavior of traffic that uses those forwarding classes when you upgrade to Junos OS Release 12.3. (This is because the default configuration of these two forwarding classes includes the no-loss packet drop attribute.)

However, if you explicitly configured the fcoe or the no-loss forwarding class by including the **set forwarding-classes class forwarding-class-name queue-num queue-number** at the **[edit class-of-service]** hierarchy level, then those forwarding classes are no longer lossless, they are lossy. In Junos OS Release 12.3 and later, you must include the **no-loss** packet drop attribute in any explicit forwarding class configuration to configure a lossless forwarding class.

For example, before Junos OS Release 12.3, the following explicit configuration resulted in a lossless forwarding class:

```
user@switch# set class-of-service forwarding-classes class fcoe queue-num 3
```

However, in Junos OS Release 12.3, this configuration is lossy because it does not include the no-loss packet drop attribute. To preserve lossless behavior, after upgrading to Junos OS Release 12.3, you need to add the no-loss drop attribute:

```
user@switch# set class-of-service forwarding-classes class fcoe queue-num 3 no-loss
```

Alternatively, you can delete the explicit configuration before you upgrade to Junos OS Release 12.3 so that the system uses the default forwarding class, which is lossless:

```
user@switch# delete class-of-service forwarding-classes class fcoe queue-num 3
```



**NOTE:** The explicit configuration of other forwarding classes does not affect the lossless (or lossy) state of the fcoe and no-loss forwarding classes, because only the fcoe and no-loss forwarding classes are lossless forwarding classes before Junos OS Release 12.3. For example, if you explicitly configured the best-effort forwarding class but you used the default fcoe and no-loss forwarding classes in Junos OS Release 12.2, then when you upgrade to Junos OS Release 12.3, the fcoe and no-loss forwarding classes are still lossless (and the best-effort forwarding classes retains its explicit configuration).



**NOTE:** To achieve lossless behavior for the traffic belonging to any forwarding class, you must also enable PFC on the IEEE 802.1p priority mapped to the forwarding class and ensure that DCBX exchanges the protocol TLVs for the application with the connected peer.



### Configuration Rules and Recommendations

---

Keep in mind the following configuration rules and recommendations when you configure the system to handle lossless traffic flows:

- You can configure a maximum of six lossless forwarding classes (forwarding classes with the no-loss packet drop attribute).
- All forwarding classes that you map to the same queue must have the same packet drop attribute (all of the forwarding classes must be lossy, or all of the forwarding classes mapped to a queue must be lossless).
- You cannot configure flow control to pause a multidestination output queue. You can configure flow control only to pause unicast output queues.
- Forwarding classes mapped to multidestination queues (queues 8 through 11) cannot have the no-loss packet drop attribute. (Multidestination forwarding classes cannot be configured as lossless forwarding classes.)
- Do not configure weighted random early detection (WRED) on lossless forwarding classes. (Do not associate a drop profile with a forwarding class that has the no-loss packet drop attribute.)

#### Related Documentation

- [Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 4911](#)
- [Understanding DCBX Application Protocol TLV Exchange on page 4472](#)
- [Example: Configuring Lossless FCoE Traffic When the Converged Ethernet Network Does Not Use IEEE 802.1p Priority 3 for FCoE Traffic \(FCoE Transit Switch\) on page 5048](#)
- [Example: Configuring Two or More Lossless FCoE Priorities on the Same FCoE Transit Switch Interface on page 5056](#)
- [Example: Configuring Two or More Lossless FCoE IEEE 802.1p Priorities on Different FCoE Transit Switch Interfaces on page 5065](#)
- [Example: Configuring Lossless IEEE 802.1p Priorities on Ethernet Interfaces for Multiple Applications \(FCoE and iSCSI\) on page 5078](#)
- [Example: Configuring IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 5094](#)
- [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)



## Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway

When the QFX Series acts as an FCoE-FC gateway, it connects an Ethernet network that carries Fibre Channel over Ethernet (FCoE) traffic to a Fibre Channel (FC) network. Ethernet interfaces connect to the FCoE network. Native FC interfaces (NP\_Ports) connect to the FC network.

FCoE traffic typically uses IEEE 802.1p priority 3 (code point 011). The QFX Series default configuration maps priority 3 traffic to the FCoE forwarding class. If your FCoE network uses priority 3 for FCoE traffic, you do not need to remap priorities, because the default configuration maps priority 3 to the FCoE forwarding class. (But you do need to enable PFC on IEEE 802.1p code point 3 on the Ethernet interfaces to achieve lossless behavior.)

However, if the FCoE network uses a different IEEE 802.1p priority than priority 3 for FCoE traffic, then you can use priority remapping to classify FCoE traffic into a lossless forwarding class mapped to that priority (and classified to that priority on the FCoE Ethernet interfaces in the ingress classifier). You specify the lossless forwarding class used for the FCoE traffic by configuring a fixed classifier and applying it to the native FC (NP\_Port) interface. All traffic received from the FC SAN on that NP\_Port interface is classified into the forwarding class specified in the fixed classifier.

When native FC interfaces on the FCoE-FC gateway encapsulate incoming FC traffic in Ethernet to create FCoE frames, by default they assign IEEE 802.1p code point 011 to the FCoE traffic, forward the traffic internally to the gateway Ethernet interfaces, and then forward the traffic to the FCoE network. Setting a rewrite value for the IEEE 802.1p code point configures the gateway native FC interface to assign the rewrite value priority to the FCoE frames when the native FC interface forwards the FCoE frames to the gateway Ethernet interface. Instead of a priority of 3, the FCoE frames use the priority specified in the rewrite value.

You can configure one rewrite value per native FC interface. Each native FC interface can use a different rewrite value.

- [Priority Remapping Configuration on page 4911](#)
- [Configuration Rules on page 4912](#)
- [Fate Sharing on page 4913](#)

### Priority Remapping Configuration

Native FC interfaces on an FCoE-FC gateway receive native FC traffic from the FC SAN and encapsulate it in Ethernet to create FCoE frames. Priority remapping enables you to map the encapsulated FC traffic (the FCoE traffic) to any IEEE 802.1p priority. (This is similar to the rewrite rules you can configure to remap forwarding classes to code points on Ethernet egress interfaces, but the rewrite takes place at the ingress FC interface so that the QFX Series uses the correct priority for FCoE traffic on the converged Ethernet network.)

To support lossless traffic flows, you must configure the remapped priority correctly on the native FC interfaces and also on the Ethernet interfaces that connect to the FCoE



network. Achieving lossless behavior for FCoE traffic when you remap the FCoE priority requires configuring:

- A lossless forwarding class for FCoE traffic (or using the default *fcoe* forwarding class)
- A behavior aggregate (BA) classifier on the FCoE Ethernet interfaces to map the FCoE forwarding class to the IEEE 802.1p code points (priority) used for FCoE traffic on the FCoE network (the ingress classifier priority for the forwarding class must be the same as the rewrite value priority)
- A fixed classifier on the FCoE-FC gateway FC interface that maps all traffic from the FC network into the lossless FCoE forwarding class (the forwarding class must be lossless)
- A priority rewrite value that remaps the IEEE 802.1p code point on the FCoE-FC gateway FC interface to the priority used for FCoE traffic on the FCoE network
- An input congestion notification profile (CNP) to enable priority-based flow control (PFC) on the FCoE code point (the code point used as the rewrite value) at the Ethernet ingress interfaces

The ingress and egress configurations must match to achieve lossless behavior. The priority and the forwarding class specified in the BA classifier and in the CNP on the Ethernet ingress interfaces must match the fixed classifier and rewrite value on the FC interfaces. You must specify the same lossless FCoE forwarding class in each configuration and use the same IEEE 802.1p code point (priority) so that the FCoE traffic is properly classified into flows and so that those flows receive lossless treatment.

For example, if you configure a lossless forwarding class named *my\_fcoe\_fc* and your Ethernet network uses IEEE 802.1p priority 5 (code point 101) for FCoE traffic, then:

- The forwarding class configuration, the BA classifier, and the fixed classifier all specify *my\_fcoe\_fc* as the forwarding class
- The BA classifier, the input CNP, and the rewrite value all specify the IEEE 802.1p code point 101

### Configuration Rules

---

The following configuration rules apply when you remap priorities on an FCoE-FC gateway:

- Each native FC interface (NP\_Port) supports one IEEE 802.1p priority value. The interface rewrites the IEEE 802.1p code point of all incoming traffic on the interface to the rewrite value. (The FC interface uses either the default value of 3 or the rewrite value for all incoming traffic.)
- Ports in the same FCoE-FC gateway local fc-fabric must use the same rewrite value. For example, if ports fc-0/0/0 and fc-0/0/1 are in the same local FCoE-FC gateway fabric, they must use the same rewrite value. If you attempt to commit a configuration that uses different IEEE 802.1p priority rewrite values, the system returns a commit error.
- Ports in different FCoE-FC gateway local fc-fabrics can use different rewrite values. An example scenario is:



- Interfaces fc-0/0/0 and fc-0/0/1 are in FCoE-FC gateway fc-fabric *my\_fc\_fab1*.
- Interfaces fc-0/0/4 and fc-0/0/5 are in FCoE-FC gateway fc-fabric *my\_fc\_fab2*.

In this scenario, interfaces fc-0/0/0 and fc-0/0/1 must use the same rewrite value because they belong to the same local FC fabric on the gateway. Interfaces fc-0/0/4 and fc-0/0/5 also must use the same rewrite value because they belong to the same local FC fabric. However, the rewrite value you use for interfaces fc-0/0/0 and fc-0/0/1 can be different than the rewrite value you use for interfaces fc-0/0/4 and fc-0/0/5 because the interfaces belong to different local FC fabrics.

- You can apply the rewrite value only to native FC interfaces; you cannot apply the rewrite value configuration to Ethernet interfaces.
- The forwarding class specified in the fixed classifier on the native FC interface must be a lossless forwarding class. You cannot apply a fixed classifier to a native FC interface unless the associated forwarding class is lossless. (The forwarding class must be one of the two default lossless forwarding classes, or you must explicitly configure the forwarding class with the *no-loss* drop attribute.)
- The lossless forwarding class and IEEE 802.1p priority configuration must match on the FCoE-FC gateway native FC interfaces and Ethernet interfaces:
  - The same IEEE 802.1p priority (code point) must be paused on the Ethernet ingress interfaces, classified to the lossless forwarding class used in the native FC interface fixed classifier, and set as the rewrite value on the native FC interfaces.
  - The same lossless forwarding class must be used in the fixed classifier on the native FC interfaces and in the classifier configuration on the Ethernet interfaces.

### Fate Sharing

To ensure that congestion on one interface does not affect the fate of traffic on a native FC interface on which you remap priorities, avoid fate sharing (different traffic flows receiving the same CoS treatment) configurations.

You can avoid fate sharing by ensuring that the remapping priority (code point) on the native FC interface is classified only to the forwarding class used in the fixed classifier on all other interfaces. For example, if you configure a fixed classifier on an FC interface that classifies all of the traffic into lossless forwarding class *myfcoe1* and remaps the priority to priority 5 (IEEE 802.1p code point 101), then in all other classifier configurations on all other interfaces, priority 5 should always be classified to forwarding class *myfcoe1*. If you classify priority 6 on another interface to forwarding class *myfcoe1*, then congestion on priority 6 traffic affects priority 5 traffic unfairly.

#### Related Documentation

- [Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896](#)
- [Example: Configuring IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 5094](#)
- [Configuring CoS Fixed Classifier Rewrite Values for Native FC Interfaces \(NP\\_Ports\) on page 5151](#)



## Understanding CoS Buffer Configuration

The QFX3500 switch has 9 MB of packet forwarding engine (PFE) wide common packet buffer memory that is used to store packets as the packets traverse the switch. The buffer memory has separate ingress and egress accounting to make accept, drop, or pause decisions. Because the switch has a single pool of memory with separate ingress and egress accounting, the full amount of buffer memory is available from both ingress and egress perspective. Packets are accounted for as they enter and leave the switch, but there is no concept of a packet arriving at an ingress buffer and then being moved to an egress buffer.

The buffers are divided into two pools from both an ingress and an egress perspective:

1. *Shared buffers* are a global memory pool that the switch allocates dynamically to ports as needed, so the buffers are shared among the switch ports. The global buffer is further partitioned into buffers for best-effort unicast and multdestination (broadcast, multicast, and destination lookup fail), and PFC (lossless) traffic types.
2. *Dedicated buffers* are a memory pool divided equally among the switch ports. Each port receives a minimum guaranteed amount of buffer space, dedicated to each port, not shared among ports. You can divide the dedicated buffer allocation for a port among the port queues on a per-port, per-queue basis. (For example, this enables you to dedicate more buffer space to queues that transport lossless traffic.)

The switch reserves nonconfigurable buffer space to ensure that ports and queues receive a minimum allocation. You can configure how the system uses the rest of the buffer space to optimize the allocation for your mix of network traffic. You can configure the percentage of available buffer space used as shared buffer space versus dedicated buffer space. You can also configure how shared buffer space is allocated to different types of traffic. You can optimize the buffer settings for the traffic on your network.

The default buffer configuration is designed for networks that have a balance of best-effort and lossless traffic.



**NOTE:** Lossless traffic is traffic on which you enable priority-based flow control (PFC) to ensure lossless transport. Lossless traffic does not refer to best-effort traffic on a link enabled for Ethernet PAUSE (IEEE 802.3x).

---

The default class-of-service configuration provides two lossless queues (**fcoe** and **no-loss**), a best-effort unicast queue, a network control traffic queue, and one multdestination—multicast, broadcast, and destination lookup fail—queue. The default configuration allocates the buffers in a manner that supports a moderate amount of lossless traffic while still providing the ability to absorb bursts in best-effort traffic transmission.

Changing the buffer settings changes the abilities of the buffers to absorb traffic bursts and handle lossless traffic. For example, networks with mostly best-effort traffic require allocating most of the shared buffer space to best-effort buffers. This provides deep,



flexible buffers that can absorb traffic bursts with minimal packet loss, at the expense of buffer availability for lossless traffic.

Conversely, networks with mostly lossless traffic require allocating most of the shared buffer space to lossless headroom buffers. This prevents packet loss on lossless flows at the expense of absorbing bursty best-effort traffic efficiently.



**CAUTION:** Changing the buffer configuration is a disruptive event. Traffic stops on *all* ports until buffer reprogramming is complete.

This topic describes the buffer architecture and settings:

- [Buffer Pools on page 4915](#)
- [Shared Buffer Configuration Recommendations for Different Network Traffic Scenarios on page 4923](#)
- [Optimizing the Buffer Configuration on page 4926](#)

### Buffer Pools

Both from an ingress and an egress perspective, the 9 MB buffer is split into two main pools:

- **Shared buffer pool**—A global memory space that all of the ports on the switch share dynamically as they need buffers. You can allocate global shared memory space to different buffer partitions to better support different mixes of network traffic. The larger the shared buffer pool, the better the switch can absorb traffic bursts because more shared memory is available for the traffic.
- **Dedicated buffer pool**—A reserved global memory space allocated equally to each port. The switch reserves a minimum dedicated buffer pool that is not user-configurable. On each egress port, you can configure the amount of the port dedicated buffer that is allocated to each of the port queues. A larger dedicated buffer pool means a larger amount of dedicated buffer space for each port, so congestion on one port is less likely to affect traffic on another port because the traffic does not need to use as much shared buffer space. However, the larger the dedicated buffer pool, the less bursty traffic the switch can handle because there is less dynamic shared buffer memory.

A portion of the total 9 MB of buffer space is reserved so that there is always a minimum amount of shared and dedicated buffer space available to each port. You can configure the way the rest of the buffer space is allocated to the global shared buffer pool and the dedicated shared buffer pool by configuring the ingress and egress shared buffer percentages. The buffer space that is not reserved is the available buffer space.

By default, 100 percent of the remaining available buffer space is allocated to the shared buffer pool. If you change the percentage, the available buffer space that is not allocated to the shared buffer is allocated to the dedicated buffer. For example, if you configure the ingress shared buffer pool as 80 percent, the remaining 20 percent of the available buffer space is allocated to the dedicated buffer pool and divided equally across the ports.





**NOTE:** If 100 percent of the available (user-configurable) buffers are allocated to the shared buffer pool, the switch still has a reserved minimum dedicated buffer pool that is necessary for proper operation.

You can separately configure ingress and egress shared buffer pool allocations. You can also partition the ingress and egress shared buffer pool to allocate percentages of the shared buffer pool to specific types of traffic. If you do not use the default configuration or one of the recommended configurations, pay particular attention to the ingress configuration of the lossless and lossless headroom buffers (to handle PFC pause during periods of congestion) and to the egress configuration of the best-effort buffers to handle incast congestion.

In addition to the shared buffer pool and the dedicated buffer pool, there is also a small ingress global headroom buffer pool that is reserved and is not configurable.

When contention for buffer space occurs, the switch uses an internal algorithm to ensure that the buffer pools are distributed fairly among competing flows. When traffic for a given flow exceeds the amount of dedicated buffer reserved for that flow, the flow begins to consume memory from the dynamic shared buffer pool. The flow is a competing flow because it competes with other flows that have exhausted their dedicated buffers for shared buffer memory. When there is no congestion, there are no competing flows.

- [Buffer Handling of Lossless Flows \(PFC\) Versus Ethernet PAUSE on page 4916](#)
- [Shared Buffer Pool on page 4916](#)
- [Dedicated Buffer Pool on page 4918](#)
- [Tradeoff Between Shared Buffer Space and Dedicated Buffer Space on page 4921](#)
- [Order of Buffer Consumption on page 4922](#)

#### ***Buffer Handling of Lossless Flows (PFC) Versus Ethernet PAUSE***

When we discuss lossless buffers in the following sections, we mean buffers that handle traffic on which you enable PFC to ensure lossless transport. The lossless buffers are not used for best-effort traffic on a link on which you enable Ethernet PAUSE (IEEE 802.3x). The lossless ingress and egress shared buffers, and the ingress lossless headroom shared buffer, are used only for traffic on which you enable PFC.



**NOTE:** To support lossless flows, you must configure the appropriate data center bridging capabilities (PFC, DCBX, or ETS) and scheduling.

#### ***Shared Buffer Pool***

The shared buffer pool is a global memory space that all of the ports on the switch share dynamically as they need buffers. The switch uses the shared buffer pool to absorb traffic bursts after the dedicated buffer pool for a port is exhausted.



You can divide both the ingress shared buffer pool and the egress shared buffer pool into three partitions to allocate percentages of the buffer pool to different types of traffic. When you partition the ingress or egress shared buffer:

- If you explicitly configure one ingress shared buffer partition, you must explicitly configure all three ingress shared buffer partitions.
- The total percentages of the three ingress shared buffer partitions must total exactly 100 percent.
- If you explicitly configure one egress shared buffer partition, you must explicitly configure all three egress shared buffer partitions.
- The total percentages of the three egress shared buffer partitions must total exactly 100 percent.
- If you explicitly partition one set of shared buffers, you do not have to explicitly partition the other set of shared buffers. For example, you can explicitly configure ingress shared buffer partitions and use the default egress shared buffer partitions (no explicit egress shared buffer partition configuration). However, if you change the buffer partitions for the ingress buffer pool to match the expected types of traffic flows, you probably would also want to change the buffer partitions for the egress buffer pool to match those traffic flows.

The switch returns a commit error if you do not explicitly configure all three partitions when configuring the ingress or egress shared buffer partitions.

When you explicitly configure the shared buffer partitions, the switch returns a commit error if the total percentage of the three partitions does not equal 100 percent.

You can configure the percentage of available (user-configurable) buffer space allocated to the global ingress and egress shared buffers. Any space that you do not allocate to the global shared buffer pool is added to the dedicated buffer pool. The default configuration allocates 100 percent of the available ingress and egress buffer space to the global shared buffers.

You can partition the ingress and egress shared buffer pools to allocate more buffers to the types of traffic your network predominantly carries, and fewer buffers to other traffic. From the buffer space allocated to the ingress shared buffer pool, you can allocate space to:

- Lossless buffers—Percentage of shared buffer pool for all lossless ingress traffic. The minimum value for lossless buffers is 5 percent.
- Lossless headroom buffers—Percentage of shared buffer pool for packets received while a pause is asserted. If PFC is configured on priorities on a port, when the port sends a pause message to the connected peer, the port uses the headroom buffers to store the packets that arrive between the time the port sends the pause message and the time the last packet arrives after the peer pauses traffic. The minimum value for lossless headroom buffers is 0 (zero) percent. (Lossless headroom buffers are the only buffers that can have a minimum value of less than 5 percent.)



- Lossy buffers—Percentage of shared buffer pool for all best-effort ingress traffic (best-effort unicast, multidestination, and strict-high priority traffic). The minimum value for best-effort buffers is 5 percent.

The combined percentage values of the ingress lossless, lossless headroom, and best-effort buffer partitions must total exactly 100 percent. If the buffer percentages total more than 100 percent or less than 100 percent, the switch returns a commit error. All ingress buffer partitions must be explicitly configured, even when the lossless headroom buffer partition has a value of 0 (zero) percent.

From the buffer space allocated to the egress shared buffer pool, you can allocate space to:

- Lossless buffers—Percentage of shared buffer pool for all lossless egress queues. The minimum value for lossless buffers is 5 percent.
- Lossy buffers—Percentage of shared buffer pool for all best-effort egress queues (best-effort unicast, and strict-high priority queues). The minimum value for best-effort buffers is 5 percent.
- Multicast buffers—Percentage of shared buffer pool for all multidestination (multicast, broadcast, and destination lookup fail) egress queues. The minimum value for multicast buffers is 5 percent.

The combined percentage values of the egress lossless, lossy, and multicast buffer partitions must total exactly 100 percent. If the buffer percentages total more than 100 percent or less than 100 percent, the switch returns a commit error. All egress buffer partitions must be explicitly configured and must have a value of at least 5 percent.

### ***Dedicated Buffer Pool***

The global dedicated buffer pool is memory that is allocated equally to each port, so each port receives a guaranteed minimum amount of buffer space. Dedicated buffers are not shared among ports. Each port receives an equal proportion of the total dedicated buffer pool. The amount of dedicated buffers per port is not user-configurable and depends on the total size of the dedicated buffer pool.

When traffic enters and exits the switch, the switch ports first use their dedicated buffer space to store packets. If the dedicated buffers are not sufficient to handle the traffic, the switch uses shared buffers. The only way to increase the dedicated buffer pool is to decrease the shared buffer pool from its default value of 100 percent of available buffers.



**NOTE:** If 100 percent of the available (user-configurable) buffers are allocated to the shared buffer pool, the switch still has a reserved minimum dedicated buffer pool.

---

A smaller dedicated buffer pool means a larger shared buffer pool, and better burst absorption across the ports. A larger dedicated buffer pool means a larger amount of dedicated buffer space for each port, so congestion on one port is less likely to affect traffic on another port because the traffic does not need to use as much shared buffer space.



You can divide the dedicated buffer allocation for an egress port among the port queues by including the **buffer-size** statement in the scheduler configuration. This enables you to control the egress dedicated buffer allocation on a per-port, per-queue basis. (For example, this enables you to dedicate more buffer space to queues that transport lossless traffic, or to stop the port from reserving buffers for queues that do not carry traffic.) Egress dedicated buffer allocation is a hierarchical structure that allocates a global dedicated buffer pool evenly among ports, and then divides the allocation for each port among the port queues.

By default, ports divide their allocation of dedicated buffers among the egress queues in the same proportion as the default scheduler sets the minimum guaranteed transmission rates (**transmit-rate**) for traffic. Only the queues included in the default scheduler receive bandwidth and dedicated buffers, in the proportions shown in [Table 400 on page 4919](#):

**Table 400: Default Dedicated Buffer Allocation to Egress Queues (Based on Default Scheduler)**

Forwarding Class	Queue	Minimum Guaranteed Bandwidth	Proportion of Reserved Dedicated Buffers
best-effort	0	5%	5%
fcoe	3	35%	35%
no-loss	4	35%	35%
network-control	7	5%	5%
mcast	8	20%	20%

In the default configuration, no other egress queues than the ones shown in [Table 400 on page 4919](#) receive an allocation of dedicated port buffers.



**NOTE:** The switch uses hierarchical scheduling to control port and queue bandwidth allocation, as described in “[Understanding CoS Hierarchical Port Scheduling \(ETS\)](#)” on page 4872 and shown in “[Example: Configuring CoS Hierarchical Port Scheduling \(ETS\)](#)” on page 4962. For egress queue buffer size configuration, when you associate a traffic control profile (includes the queue scheduler information) with a port, the dedicated egress buffers on the port are divided among the queues as configured in the scheduler.

If you do not want to use the default allocation of dedicated port buffers to queues, you can configure the dedicated buffer allocation for each egress queue on a particular port. Configure the dedicated buffer allocation to a queue in the scheduler that is mapped to the egress queue by using the **buffer-size** option. You can configure the dedicated buffer allocation to queues in two ways:



- As a percentage—The queue receives the specified percentage of dedicated port buffers when the queue is mapped to the scheduler and the scheduler is mapped to a port.
- As a remainder—After the port services the queues that have an explicit percentage buffer size configuration, the remaining port dedicated buffer space is divided equally among the other queues to which a scheduler is attached. (No default or explicit scheduler means no dedicated buffer allocation for the queue.) If you configure a scheduler and you do not specify a buffer size as a percentage, *remainder* is the default setting.



**NOTE:** The total of all of the explicitly configured buffer size percentages for all of the queues on a port cannot exceed 100 percent.

In a port configuration that includes multiple forwarding class sets, with multiple forwarding classes mapped to multiple schedulers, the allocation of port dedicated buffers to queues depends on the mix of queues with buffer sizes configured as explicit percentages and queues configured with (or defaulted to) the **remainder** option.

The best way to demonstrate how using the percentage and remainder options affects port buffer allocation to queues is by showing an example of queue buffer allocation, and then showing how the queue buffer allocation changes when you add another forwarding class (queue) to the port.

Table 401 on page 4920 shows an initial configuration that includes four forwarding class sets, the five default forwarding classes (mapped to the five default queues for those forwarding classes), the **buffer-size** option configuration, and the resulting buffer allocation for each queue. Table 402 on page 4921 shows the same configuration after we add another forwarding class (queue) to the best-effort forwarding class set. Comparing the buffer allocations in each table shows you how adding another queue affects buffer allocation when you use remainders and explicit percentages to configure the buffer allocation for different queues.

**Table 401: Example 1: Egress Queue Dedicated Buffer Allocation**

Forwarding Class Set (Priority Group)	Forwarding Class	Queue	Scheduler Buffer Size Configuration	Buffer Allocation per Queue (Percentage)
fc-set-be	best-effort	0	10%	10%
fc-set-lossless	fcoe	3	20%	20%
	no-loss	4	40%	40%
fc-set-strict-high	network-control	7	remainder	15%
fc-set-mcast	mcast	8	remainder	15%



In this first example, 70 percent of the egress port dedicated buffer pool is explicitly allocated to the best-effort, fcoe, and no-loss queues. The remaining 30 percent of the port dedicated buffer pool is split between the two queues that use the **remainder** option (network-control and mcast), so each queue receives 15 percent of the dedicated buffer pool.

Now we add another forwarding class (queue) to the best-effort priority group (fc-set-be) and configure it with a buffer size of remainder instead of configuring a specific percentage. Because a third queue now shares the remaining dedicated buffers, the queues that share the remainder receive fewer dedicated buffers, as shown in [Table 402 on page 4921](#). The queues with explicitly configured percentages receive the configured percentage of dedicated buffers.

**Table 402: Example 2: Egress Queue Dedicated Buffer Allocation with Another Remainder Queue**

Priority Group (fc-set)	Forwarding Class	Queue	Scheduler Buffer Size Configuration	Buffer Allocation per Queue (Percentage)
fc-set-be	best-effort	0	10%	10%
	best-effort-2	1	remainder	10%
fc-set-lossless	fcoe	3	20%	20%
	no-loss	4	40%	40%
fc-set-strict-high	network-control	7	remainder	10%
fc-set-mcast	mcast	8	remainder	10%

The two tables show how the port divides the dedicated buffer space that remains after servicing the queues that have an explicitly configured percentage of dedicated buffer space.

#### ***Tradeoff Between Shared Buffer Space and Dedicated Buffer Space***

The tradeoff between shared buffer space and dedicated buffer space is:

- Shared buffers provide better absorption of traffic bursts because there is a larger pool of dynamic buffers that ports can use as needed to handle traffic bursts. However, all flows that exhaust their dedicated buffer space compete for the shared buffer pool. A larger shared buffer pool means a smaller dedicated buffer pool, and therefore more competition for the shared buffer pool because more flows exhaust their dedicated buffer allocation.
- Dedicated buffers provide guaranteed buffer space to each port. The larger the dedicated buffer pool, the less likely that congestion on one port affects traffic on another port, because the traffic does not need to use as much shared buffer space. However, less shared buffer space means less ability to dynamically absorb traffic bursts.



When there is too much shared buffer space and too little dedicated buffer space, the result can be too much competition for the shared buffers because the flows exhaust their dedicated buffers too quickly. To maintain fairness, no single flow receives very much shared buffer space.

When there is too much dedicated buffer space and too little shared buffer space, there is less competition for the shared buffer pool because the dedicated buffer space is enough to service most flows. However, a smaller shared buffer pool leaves fewer buffers available to absorb traffic bursts.

For optimal burst absorption, the switch needs enough dedicated buffer space to avoid persistent competition for the shared buffer space. When fewer flows compete for the shared buffers, the flows that need shared buffer space to absorb bursts receive more of the shared buffer because fewer flows exhaust their dedicated buffer space.

The default configuration and all of the recommended configurations allocate 100 percent of the user-configurable memory space to the global shared buffer pool because the amount of nonconfigurable buffer space reserved for dedicated buffers provides enough dedicated buffers to avoid persistent competition for dynamic shared buffers. This results in fewer flows competing for the shared buffers, so the competing flows receive more of the buffer space.

#### ***Order of Buffer Consumption***

The total buffer pool is divided into ingress and egress shared buffer pools and dedicated buffer pools. When traffic flows through the switch, the buffer space is used in a particular order that depends on the type of traffic.

On ingress, the order of buffer consumption is:

- Best-effort unicast traffic:
  1. Dedicated buffers
  2. Shared buffers
  3. Global headroom buffers (very small)
- Lossless unicast traffic:
  1. Dedicated buffers
  2. Shared buffers
  3. Lossless headroom buffers
  4. Global headroom buffers (very small)
- Multidestination traffic:
  1. Dedicated buffers
  2. Shared buffers
  3. Global headroom buffers (very small)



On egress, the order of buffer consumption is the same for unicast best-effort, lossless unicast, and multidestination traffic:

- Dedicated buffers
- Shared buffers

In all cases on all ports, the switch uses the dedicated buffer pool first and the shared buffer pool only after the dedicated buffer pool for the port or queue is exhausted. This reserves the maximum amount of dynamic shared buffer space to absorb traffic bursts.

### Shared Buffer Configuration Recommendations for Different Network Traffic Scenarios

The way you configure the shared buffer pool depends on the mix of traffic on your network. This section provides shared buffer configuration recommendations for four basic network traffic scenarios:

- **Balanced traffic**—The network carries a balanced mix of unicast best-effort, lossless, and multicast traffic.
- **Best-effort unicast traffic**—The network carries mostly unicast best-effort traffic.
- **Best-effort multicast traffic**—The network carries mostly multicast best-effort traffic.
- **Lossless traffic**—The network carries mostly lossless traffic (traffic on which PFC is enabled).



**NOTE:** Lossless traffic is defined as traffic on which you enable PFC to ensure lossless transport. Lossless traffic does not refer to best-effort traffic on a link on which you enable Ethernet PAUSE (IEEE 802.3X).

The lossless traffic configuration recommendation does not apply to networks that carry large amounts of best-effort traffic that is subject to Ethernet PAUSE. The best-effort traffic configuration also does not apply to networks that carry large amounts of Ethernet PAUSE traffic. You might have to adjust the buffer settings from the default configuration to optimize buffer utilization for networks with heavy Ethernet PAUSE traffic.

Start with the recommended shared buffer configuration for your network traffic conditions:

- [Balanced Traffic \(Default Configuration\) on page 4923](#)
- [Best-Effort Unicast Traffic on page 4924](#)
- [Best-Effort Multicast \(Multidestination\) Traffic on page 4925](#)
- [Lossless Traffic on page 4925](#)

#### ***Balanced Traffic (Default Configuration)***

The default shared buffer configuration is optimized for networks that carry a balanced mix of best-effort unicast, lossless, and multidestination (multicast, broadcast, and



destination lookup fail) traffic. The default class of service (CoS) configuration is also optimized for networks that carry a balanced mix of traffic.

We recommend that you use the default shared buffer configuration for networks that carry a balanced mix of traffic, especially if you are using the default CoS settings. Table [Table 403 on page 4924](#) shows the default ingress shared buffer allocations:

**Table 403: Default Ingress Shared Buffer Configuration**

Total Shared Ingress Buffer	Lossless Buffer	Lossless-Headroom Buffer	Lossy Buffer
100%	9%	45%	46%

Table [Table 404 on page 4924](#) shows the default egress shared buffer allocations:

**Table 404: Default Egress Shared Buffer Configuration**

Total Shared Egress Buffer	Lossless Buffer	Lossy Buffer	Multicast Buffer
100%	50%	31%	19%

#### ***Best-Effort Unicast Traffic***

If your network carries mostly best-effort (lossy) unicast traffic, then the default shared buffer configuration allocates too much buffer space to support lossless transport. Instead of wasting those buffers, we recommend that you use the following ingress shared buffer settings (see [Table 405 on page 4924](#)) and egress shared buffer settings (see [Table 406 on page 4924](#)):

**Table 405: Recommended Ingress Shared Buffer Configuration for Networks with Mostly Best-Effort Unicast Traffic**

Total Shared Ingress Buffer	Lossless Buffer	Lossless-Headroom Buffer	Lossy Buffer
100%	5%	0%	95%

**Table 406: Recommended Egress Shared Buffer Configuration for Networks with Mostly Best-Effort Unicast Traffic**

Total Shared Egress Buffer	Lossless Buffer	Lossy Buffer	Multicast Buffer
100%	5%	75%	20%

See “[Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Best-Effort Unicast Traffic](#)” on page 5103 for an example that shows you how to configure the recommended buffer settings shown in [Table 405 on page 4924](#) and [Table 406 on page 4924](#).



**Best-Effort Multicast (Multidestination) Traffic**

If your network carries mostly best-effort (lossy) multicast traffic, then the default shared buffer configuration allocates too much buffer space to support lossless transport. Instead of wasting those buffers, we recommend that you use the following ingress shared buffer settings (see [Table 407 on page 4925](#)) and egress shared buffer settings (see [Table 408 on page 4925](#)):

**Table 407: Recommended Ingress Shared Buffer Configuration for Networks with Mostly Best -Effort Multicast Traffic**

Total Shared Ingress Buffer	Lossless Buffer	Lossless-Headroom Buffer	Lossy Buffer
100%	5%	0%	95%

**Table 408: Recommended Egress Shared Buffer Configuration for Networks with Mostly Best-Effort Multicast Traffic**

Total Shared Egress Buffer	Lossless Buffer	Lossy Buffer	Multicast Buffer
100%	5%	20%	75%

See “[Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Multicast Traffic](#)” on page 5109 for an example that shows you how to configure the recommended buffer settings shown in [Table 407 on page 4925](#) and [Table 408 on page 4925](#).

**Lossless Traffic**

If your network carries mostly lossless traffic, then the default shared buffer configuration allocates too much buffer space to support best-effort traffic. Instead of wasting those buffers, we recommend that you use the following ingress shared buffer settings (see [Table 409 on page 4925](#)) and egress shared buffer settings (see [Table 410 on page 4925](#)):

**Table 409: Recommended Ingress Shared Buffer Configuration for Networks with Mostly Lossless Traffic**

Total Shared Ingress Buffer	Lossless Buffer	Lossless-Headroom Buffer	Lossy Buffer
100%	15%	80%	5%

**Table 410: Recommended Egress Shared Buffer Configuration for Networks with Mostly Lossless Traffic**

Total Shared Egress Buffer	Lossless Buffer	Lossy Buffer	Multicast Buffer
100%	90%	5%	5%



See [“Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Lossless Traffic” on page 5114](#) for an example that shows you how to configure the recommended buffer settings shown in [Table 409 on page 4925](#) and [Table 410 on page 4925](#).

### Optimizing the Buffer Configuration

---

Instead of using the default buffer configuration or one of the recommended buffer configurations, you can optimize the buffer configuration to best support the mix of traffic on your network:

- [Optimizing Buffer Configuration on page 4926](#)
- [General Rules and Considerations on page 4927](#)

#### **Optimizing Buffer Configuration**

If you feel that the recommended shared buffer configurations are not optimized enough for your network, adjust the settings gradually to fine-tune the shared buffer allocation. Use caution when adjusting the shared buffer configuration, not just when you fine-tune the ingress and egress buffer partitions, but also when you fine-tune the total ingress and egress shared buffer percentage. (Remember that if you allocate less than 100 percent of the available buffers to the shared buffers, the remaining buffers are added to the dedicated buffers). Tuning the buffers incorrectly can cause problems such as head-of-line blocking (HOLB).



**CAUTION:** Changing the buffer configuration is a disruptive event. Traffic stops on all ports until buffer reprogramming is complete.

---

The relationship between the sizes of the ingress buffer pool and the egress buffer pool affects when and where packets are dropped. The buffer pool sizes include the shared buffers and the dedicated buffers. In general, if there are more ingress buffers than egress buffers, the switch can experience HOLB because egress queues fill before ingress queues can empty.

Use the [show class-of-service shared-buffer](#) operational command to see the sizes in kilobytes (KB) of the dedicated and shared buffers and of the shared buffer partitions.

For best-effort traffic (unicast and multdestination), the combined ingress lossy shared buffer partition and ingress dedicated buffers must be *less than* the combined egress lossy and multicast shared buffer partitions plus the egress dedicated buffers. This prevents HOLB and ensures that if packets are dropped, they are dropped at the egress queues. (Packets dropping at the ingress prevents the egress schedulers from working properly.)

For lossless traffic (traffic on which you enable PFC), the combined ingress lossless shared buffer partition and a reasonable portion of the ingress headroom buffer partition, plus the dedicated buffers, must be *less than* the total egress lossless shared buffer partition and dedicated buffers. (A reasonable portion of the ingress headroom buffer is approximately 20 to 25 percent of the buffer space, but this varies depending on how much buffer headroom is required to support the lossless traffic.) When these conditions



are met, if there is HOLB, the HOLB triggers PFC on the ingress port to prevent packet loss. If the total lossless ingress buffers exceed the total lossless egress buffers, packets could be dropped at the egress instead of PFC being applied at the ingress to prevent packet loss.



**NOTE:** If you commit a buffer configuration that the switch cannot satisfy, the switch might log an error instead of returning a commit error. After you commit a buffer configuration, check the syslog messages to ensure that the new buffer configuration did not fail to commit.

If the buffer configuration commits but you receive a syslog message that indicates the configuration cannot be satisfied, you can:

- Reconfigure the buffers or reconfigure other parameters (for example, the PFC configuration, which affects the need for lossless headroom buffers and lossless buffers—the more priorities you pause, the more lossless and lossless headroom buffer space you need), then attempt the commit operation again.
- Rollback the switch to the last successful configuration.

If you receive a syslog message that says the buffer configuration cannot be satisfied, you must take corrective action. If you do not fix the configuration or rollback to a previous successful configuration, the system behavior is unpredictable.

### ***General Rules and Considerations***

Keep the following rules and considerations in mind when you configure the buffers:

- Changing the buffer configuration is a disruptive event. Traffic stops on *all* ports until buffer reprogramming is complete.
- If you configure the ingress or egress shared buffer percentages as less than 100 percent, the remaining percentage of buffer space is added to the reserved (not user-configurable) dedicated buffer pool.
- The sum of all of the ingress shared buffer partitions must equal 100 percent. Each partition must be configured with a value of at least 5 percent except the lossless headroom buffer, which can have a value of 0 percent.
- The sum of all of the egress shared buffer partitions must equal 100 percent. Each partition must be configured with a value of at least 5 percent.
- Lossless and lossless headroom shared buffers serve traffic on which you enable PFC, and do not serve traffic subject to Ethernet PAUSE.
- The switch uses the dedicated buffer pool first and the shared buffer pool only after the dedicated buffer pool for the port or queue is exhausted.
- Too little dedicated buffer space results in too much competition for shared buffer space.



- Too much dedicated buffer space results in poorer burst absorption because there is less shared buffer space available.
- Always check the syslog messages after you commit a new buffer configuration.
- The optimal buffer configuration for your network depends on the types of traffic on the network. If your network carries less traffic of a certain type (for example, lossless traffic), then reduce the size of the buffers allocated to that type of traffic (for example, reduce the sizes of the lossless and lossless headroom buffers).

**Related  
Documentation**

- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Best-Effort Unicast Traffic on page 5103](#)
- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Multicast Traffic on page 5109](#)
- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Lossless Traffic on page 5114](#)
- [Example: Configuring Queue Schedulers on page 5030](#)
- [Configuring Global Ingress and Egress Shared Buffers on page 5153](#)



## Understanding CoS Tail-Drop Profiles

When the number of packets queued is greater than the ability of the switch to empty an output queue, the queue requires a method for determining which packets to drop to relieve the congestion. Weighted random early detection (WRED) drop profiles define the drop probability of packets as the output queue fills. During periods of congestion, as the output queue fills, the switch drops incoming packets as determined by a drop profile until the output queue becomes less congested.

Depending on the drop probabilities, a drop profile can drop many packets long before the buffer becomes full, or it can drop only a few packets even if the buffer is almost full.

You configure drop profiles in the drop profile section of the class-of-service (CoS) configuration hierarchy. You apply drop profiles using a drop profile map in each scheduler configuration. For each scheduler, you can configure separate drop profiles for each combination of loss priority (low, medium-high, and high) and protocol.

Drop profiles define the meaning of each of the loss priorities by setting the values for when to drop packets and the probability that packets will drop.

You can configure a maximum of 32 drop profiles.



**NOTE:** You cannot apply drop profiles to multidestination (multicast) queues.

Do not apply drop profiles to lossless flows such as FCoE traffic, because the corresponding queues require lossless behavior. Use priority-based flow control (PFC) to prevent packet drop.

- [Drop Profile Parameters on page 4929](#)
- [Default Drop Profile on page 4930](#)
- [Packet Drop Method on page 4931](#)
- [Drop Profile Maps on page 4932](#)
- [Congestion Prevention on page 4932](#)

### Drop Profile Parameters

Drop profiles specify two values:

- **Fill level**—The queue fullness value, which represents a percentage of the memory used to store packets in relation to the total amount of memory allocated to the queue.
- **Drop probability**—The percentage value that corresponds to the likelihood that an individual packet is dropped.


You set two queue fill levels and two drop probabilities in each drop profile. The two fill levels and the two drop probabilities create two pairs of values. The first fill level and the first drop probability create one value pair and the second fill level and the second drop probability create the second value pair.



The first fill level value specifies the percentage of queue fullness at which packets begin to drop, known as the drop start point. Until the queue reaches this level of fullness, no packets are dropped. The second fill level value specifies the percentage of queue fullness at which all packets are dropped, known as the drop end point.

The first drop probability value is always 0 (zero). This pairs with the drop start point and specifies that until the queue fullness level reaches the first fill level, no packets drop. When the queue fullness exceeds the drop start point, packets begin to drop until the queue exceeds the second fill level, when all packets drop. The second drop probability value, known as the maximum drop rate, specifies the likelihood of dropping packets when the queue fullness reaches the drop end point. As the queue fills from the drop start point to the drop end point, packets drop in a smooth, linear pattern (called an interpolated graph) as shown in [Figure 184 on page 4930](#). After the drop end point, all packets drop.

**Figure 184: Tail-Drop Profile Packet Drop**

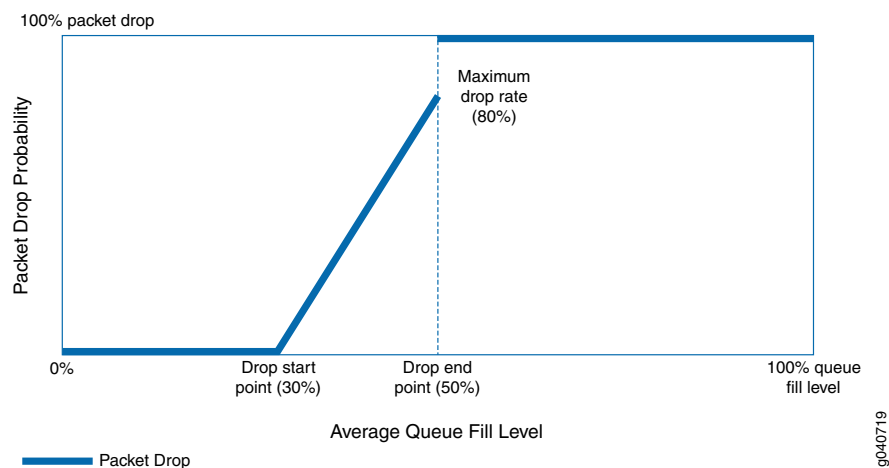

The thick line in [Figure 184 on page 4930](#) shows the packet drop characteristics for a sample tail-drop profile. At the drop start point, the queue reaches a fill level of 30 percent. At the drop end point, the queue fill level reaches 50 percent, and the maximum drop rate is 80 percent.

No packets drop until the queue fill level reaches the drop start point of 30 percent. When the queue reaches the 30 percent fill level, packets begin to drop. As the queue fills, the percentage of packets dropped increases in a linear fashion. When the queue fills to the drop end point of 50 percent, the rate of packet drop has increased to the maximum drop rate of 80 percent. When the queue fill level exceeds the drop end point of 50 percent, all of the packets drop until the queue fill level drops below 50 percent.

### Default Drop Profile

If you do not configure default profiles and apply them to queue schedulers, the switch uses the default drop profile for lossy traffic classes. In the default drop profile, when the fill level is 0 percent, the drop probability is 0 percent. When the fill level is 100 percent, the drop probability is 100 percent. As soon as packets arrive on a queue, the default profile might begin to drop packets.



---

## Packet Drop Method

---

When a packet reaches the head of the queue, the switch generates a random number between 0 and 100. The switch plots the random number against the drop profile using the current fullness of the queue. When the random number falls above the graph line, the packet is transmitted. When the number falls below the graph line, the packet is dropped.

To create the linear drop pattern from the drop start point to the drop end point, the drop probabilities are derived using a linear approximation with eight sections, or steps, from the minimum queue fill level to the maximum queue fill level. The fill levels are divided into the eight sections equally, starting at the minimum fill level and ending at the maximum fill level. As the queue fills, the percentage of dropped packets increases. The percentage of packets dropped is based on the maximum drop rate.

For example, the default drop profile (which specifies a maximum drop rate of 100 percent) has the following drop probabilities at each section, or step, in the eight-section linear drop pattern:

- First section—The minimum drop probability is 6.25 percent of the maximum drop rate. The maximum drop probability is 12.5 percent of the maximum drop rate.
- Second section—The minimum drop probability is 18.75 percent of the maximum drop rate. The maximum drop probability is 25 percent of the maximum drop rate.
- Third section—The minimum drop probability is 30.25 percent of the maximum drop rate. The maximum drop probability is 37.5 percent of the maximum drop rate.
- Fourth section—The minimum drop probability is 43.75 percent of the maximum drop rate. The maximum drop probability is 50 percent of the maximum drop rate.
- Fifth section—The minimum drop probability is 56.25 percent of the maximum drop rate. The maximum drop probability is 62 percent of the maximum drop rate.
- Sixth section—The minimum drop probability is 68.75 percent of the maximum drop rate. The maximum drop probability is 75.5 percent of the maximum drop rate.
- Seventh section—The minimum drop probability is 81.25 percent of the maximum drop rate. The maximum drop probability is 87.5 percent of the maximum drop rate.
- Eighth section—The minimum drop probability is 92.75 percent of the maximum drop rate. The maximum drop probability is 100 percent of the maximum drop rate.

Packets drop even when there is no congestion, because packet drops begin at the drop start point regardless of whether congestion exists on the port. The default drop profile example represents the worst-case scenario, because the drop start point fill level is 0 percent, so packet drop begins when the queue starts to receive packets.

You can specify when packets begin to drop by configuring a drop start point at a fill level greater than 0 percent. For example, if you configure a drop profile that has a drop start point of 30 percent, packets do not drop until the queue is 30 percent full.

The smaller the gap between the minimum drop rate (which is always 0) and the maximum drop rate, the smaller the gap between the minimum drop probability and the



maximum drop probability at each section (step) of the linear drop pattern. The default drop profile, which has the maximum gap between the minimum drop rate (0 percent) and the maximum drop rate (100 percent), has the highest gap between the minimum drop probability and the maximum drop probability at each step. Configuring a lower maximum drop rate for a drop profile reduces the gap between the minimum drop probability and the maximum drop probability.

### Drop Profile Maps

---

Drop profile maps are part of scheduler configuration. A drop profile map maps a drop profile to a loss priority and a protocol. Specifying the drop profile map in a scheduler associates the drop profile with the queues (forwarding classes) that you map to the scheduler in a scheduler map.

You configure loss priority for a queue in the classifier section of the CoS configuration hierarchy, and the loss priority is applied to the queue at the ingress interface.

Each scheduler can have multiple drop profile maps, one for each combination of loss priority and protocol.

### Congestion Prevention

---

Configuring drop profiles on output queues prevents them from impacting other queues on the egress ports. If you do not configure drop profiles and map them to output queues, output queues without drop profiles can impact the bandwidth available to other output queues.



**NOTE:** Do not configure drop profiles for lossless traffic such as the default FCoE and no-loss forwarding classes because queues mapped to lossless forwarding classes require lossless behavior. Use priority-based flow control (PFC) to prevent packet drop.

---

For example, queues might not receive the egress bandwidth configured in the queue scheduler when a port's egress queues are congested because the ingress port buffer fills above a certain threshold. If this happens, configuring a drop profile for the queue on the port that is receiving its configured bandwidth alleviates the problem by preventing the queue from impacting the other queues on the port.

#### Related Documentation

- [Understanding Junos CoS Components on page 4827](#)
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Tail-Drop Profiles on page 5019](#)
- [Example: Configuring Drop Profile Maps on page 5022](#)
- [Example: Configuring Unicast Classifiers on page 5014](#)
- [Configuring CoS Tail-Drop Profiles on page 5136](#)
- [Configuring CoS Drop Profile Maps on page 5137](#)
- [Defining CoS Unicast BA Classifiers on page 5133](#)



## Understanding CoS Rewrite Rules

As packets enter or exit a network, edge switches might be required to alter the class-of-service (CoS) settings of the packets. Rewrite rules set the value of the CoS bits within the header of the outgoing packet. Each rewrite rule reads the current forwarding class and loss priority associated with the packet, locates the chosen CoS value from a table, and writes this CoS value into the packet header. Rewrite rules must be assigned to an interface for rewrites to be activated.

You can apply (bind) one DSCP or DSCP IPv6 rewrite rule and one IEEE 802.1p rewrite rule to each interface as described in [“Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces” on page 4851](#).

You cannot apply both a DSCP and a DSCP IPv6 rewrite rule to the same interface; each interface supports only one DSCP rewrite rule. Both IP and IPv6 packets use the same DSCP rewrite rule, regardless if the configured rewrite rule is DSCP or DSCP IPv6.



**NOTE:** There are no default rewrite rules.

You can look at behavior aggregate (BA) classifiers and rewrite rules as two sides of the same coin. A BA classifier reads the CoS bits of incoming packets and classifies the packets into forwarding classes, then the system applies the CoS configured for the forwarding class to those packets. Rewrite rules rewrite the CoS bits just before the packets leave the system so that the next switch can apply the appropriate level of CoS to the packets. When you apply a rewrite rule to an interface, the rewrite rule is the last CoS action performed on the packet before it is forwarded.

Rewrite rules alter CoS values in outgoing packets on the outbound interfaces of an edge switch to accommodate the policies of a targeted peer. This allows the downstream switch in a neighboring network to classify each packet into the appropriate service group.



**NOTE:** On each physical interface, either all forwarding classes that are being used on the interface must have rewrite rules configured or no forwarding classes that are being used on the interface can have rewrite rules configured. On any physical port, do not mix forwarding classes with rewrite rules and forwarding classes without rewrite rules.

QFX Series does not have default rewrite rules. If you want to apply a rewrite rule to outgoing packets, you must explicitly configure the rewrite rule.



**NOTE:** Rewrite rules are applied *before* the egress filter is matched to traffic. Because the code point rewrite occurs before the egress filter is matched to traffic, the egress filter match is based on the rewrite value, not on the original code point value in the packet.



For packets that carry both an inner VLAN tag and an outer VLAN tag, the rewrite rule rewrites only the outer VLAN tag.

**Related  
Documentation**

- [Understanding Junos CoS Components on page 4827](#)
- [Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces on page 4851](#)
- [Defining CoS Rewrite Rules on page 5155](#)

## Understanding DCB Features and Requirements

Data center bridging (DCB) is a set of enhancements to the IEEE 802.1 bridge specifications. DCB modifies and extends Ethernet behavior to support I/O convergence in the data center. I/O convergence includes but is not limited to the transport of Ethernet LAN traffic and Fibre Channel (FC) storage area network (SAN) traffic on the same physical Ethernet network infrastructure.

A converged architecture saves cost by reducing the number of networks and switches required to support both types of traffic, reducing the number of interfaces required, reducing cable complexity, and reducing administration activities.

The Juniper Networks QFX Series supports the DCB features required to transport converged Ethernet and FC traffic while providing the class-of-service (CoS) and other characteristics FC requires for transmitting storage traffic. To accommodate FC traffic, DCB specifications provide:

- A flow control mechanism called priority-based flow control (PFC, described in IEEE 802.1Qbb) to help provide lossless transport.
- A discovery and exchange protocol for conveying configuration and capabilities among neighbors to ensure consistent configuration across the network, called Data Center Bridging Capability Exchange protocol (DCBX), which is an extension of Link Layer Data Protocol (LLDP, described in IEEE 802.1AB).
- A bandwidth management mechanism called enhanced transmission selection (ETS, described in IEEE 802.1Qaz).
- A congestion management mechanism called quantized congestion notification (QCN, described in IEEE 802.1Qau).

The switch supports the PFC, DCBX, and ETS standards but does not support QCN. The switch also provides the high-bandwidth interfaces (10-Gbps minimum) required to support DCB and converged traffic.

This topic describes the DCB standards and requirements the switch supports:

- [Lossless Transport on page 4935](#)
- [ETS on page 4936](#)
- [DCBX on page 4936](#)



---

## Lossless Transport

---

FC traffic requires lossless transport (defined as no frames dropped because of congestion). Standard Ethernet does not support lossless transport, but the DCB extensions to Ethernet along with proper buffer management enable an Ethernet network to provide the level of class of service (CoS) necessary to transport FC frames encapsulated in Ethernet over an Ethernet network.

This section describes these factors in creating lossless transport over Ethernet:

- [PFC on page 4935](#)
- [Buffer Management on page 4935](#)
- [Physical Interfaces on page 4935](#)

### ***PFC***

PFC is a link-level flow control mechanism similar to Ethernet PAUSE (described in IEEE 802.3x). Ethernet PAUSE stops all traffic on a link for a period of time. PFC enables you to divide traffic on a link into eight priorities and stop the traffic of a selected priority without stopping the traffic assigned to other priorities on the link.

Pausing the traffic of a selected priority enables you to provide lossless transport for traffic assigned that priority and at the same time use standard lossy Ethernet transport for the rest of the link traffic.

### ***Buffer Management***

Buffer management is critical to the proper functioning of PFC, because if buffers are allowed to overflow, frames are dropped and transport is not lossless.

For each lossless flow priority, the switch requires sufficient buffer space to:

- Store frames sent during the time it takes to send the PFC pause frame across the cable between devices.
- Store the frames that are already on the wire when the sender receives the PFC pause frame.

The propagation delay due to cable length and speed, as well as processing speed, determines the amount of buffer space needed to prevent frame loss due to congestion.

The switch automatically sets the threshold for sending PFC pause frames to accommodate delay from cables as long as 150 meters (492 feet) and to accommodate large frames that might be on the wire when the switch sends the pause frame. This ensures that the switch sends pause frames early enough to allow the sender to stop transmitting before the receive buffers on the switch overflow.

### ***Physical Interfaces***

The switch supports 10-Gbps, full-duplex interfaces. The switch enables DCB capability only on 10-Gbps (or faster) Ethernet interfaces.



## ETS

---

PFC divides traffic into up to eight separate streams (priorities, configured on the switch as forwarding classes) on a physical link. ETS enables you to manage the link bandwidth by:

- Grouping the priorities into priority groups (configured on the switch as forwarding class sets).
- Specifying the bandwidth available to each of the priority groups as a percentage of the total available link bandwidth.
- Allocating the bandwidth to the individual priorities in the priority group.

The available link bandwidth is the bandwidth remaining after servicing strict priority flows.

Managing link bandwidth with ETS provides several advantages:

- There is uniform management of all types of traffic on the link, both congestion-managed traffic and standard Ethernet traffic.
- When a priority group does not use all of its allocated bandwidth, other priority groups on the link can use that bandwidth as needed.

When a priority in a priority group does not use all of its allocated bandwidth, other priorities in the group can use that bandwidth.

The result is better bandwidth utilization, because priorities that consist of bursty traffic can share bandwidth during periods of low traffic transmission instead of consuming their entire bandwidth allocation when traffic loads are light.

- You can assign traffic types with different service needs to different priorities so that each traffic type receives appropriate treatment.
- Strict priority traffic retains its allocated bandwidth.

## DCBX

---

DCB devices use DCBX to exchange configuration information with directly connected peers (switches and endpoints such as servers). DCBX is an extension of LLDP. If you disable LLDP on an interface, that interface cannot run DCBX. If you attempt to enable DCBX on an interface on which LLDP is disabled, the configuration commit fails.

DCBX can:

- Discover the DCB capabilities of peers.
- Detect DCB feature misconfiguration or mismatches between peers.
- Configure DCB features on peers.

You can configure DCBX operation for PFC, ETS, and for Layer 2 and Layer 4 applications such as FCoE and iSCSI. DCBX is enabled or disabled on a per-interface basis.



**Related  
Documentation**

- [Overview of Fibre Channel on the QFX Series on page 4380](#)
- [Understanding FCoE on page 4392](#)
- [Understanding CoS Hierarchical Port Scheduling \(ETS\) on page 4872](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)
- [Understanding DCBX on page 4463](#)
- [Understanding Fibre Channel Terminology on page 4483](#)
- [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)



## Understanding CoS Flow Control (Ethernet PAUSE and PFC)

Flow control supports lossless transmission by regulating traffic flows so that frames are not dropped during periods of congestion. Flow control stops and resumes the transmission of network traffic between two nodes on a full-duplex Ethernet physical link. Controlling the flow prevents buffers on the nodes from overflowing and dropping frames. You configure flow control on a per-interface basis.

The QFX Series supports two methods of flow control:

- IEEE 802.3X Ethernet PAUSE
- IEEE 802.1Qbb priority-based flow control (PFC)

Both Ethernet PAUSE and PFC are link-level flow control mechanisms.

Ethernet PAUSE pauses transmission of all traffic on a link.

PFC decouples the pause function from the physical link and enables you to divide traffic on one physical link into eight priorities. You can think of the eight priorities as eight “lanes” of traffic that are mapped to forwarding classes and output queues. Each priority is mapped to a 3-bit IEEE 802.1p CoS code point flag in the VLAN header. You can enable PFC on one or more priorities (IEEE 802.1p code points) on a link. When PFC-enabled traffic is paused on a link, traffic that is not PFC-enabled continues to flow (or is dropped if congestion is severe enough).

Use Ethernet PAUSE when you want to prevent packet loss on all of the traffic on a link. Use PFC to prevent traffic loss only on specified types of traffic (for example, Fibre Channel over Ethernet traffic).



**NOTE:** Depending on the amount of traffic on a link or assigned to a priority, pausing traffic can cause head-of-line blocking and spread congestion through the network.

If you attempt to configure both Ethernet PAUSE and PFC on a link, the switch returns a commit error. Ethernet PAUSE and PFC are mutually exclusive configurations on an interface.

By default, all forms of flow control are disabled. You must explicitly enable flow control on interfaces to pause traffic.

- [Ethernet PAUSE on page 4938](#)
- [PFC on page 4942](#)
- [Lossless Transport Support on page 4944](#)

---

### Ethernet PAUSE

Ethernet PAUSE is a congestion relief feature that works by providing link-level flow control for all traffic on a full-duplex Ethernet link. Ethernet PAUSE works in both directions on the link. In one direction, an interface generates and sends PAUSE messages to stop



the connected peer from sending more traffic. In the other direction, the interface responds to PAUSE messages it receives from the connected peer to stop sending traffic. Ethernet PAUSE also works on aggregated Ethernet interfaces. For example, if the connected peer interfaces are called Node A and Node B:

- When the receive buffers on interface Node A reach a certain level of fullness, the interface generates and sends a PAUSE message to the connected peer (interface Node B) to tell the peer to stop sending frames. The Node B buffers store frames until the time period specified in the PAUSE frame elapses; then Node B resumes sending frames to Node A.
- When interface Node A receives a PAUSE message from interface Node B, interface Node A stops transmitting frames until the time period specified in the PAUSE frame elapses; then Node A resumes transmission. (The Node A transmit buffers store frames until Node A resumes sending frames to Node B.)

In this scenario, if Node B sends a PAUSE frame with a time value of 0 to Node A, the 0 time value indicates to Node A that it can resume transmission. This happens when the Node B buffer empties to below a certain threshold and the buffer can once again accept traffic.

*Symmetric flow control* means an interface has the same PAUSE configuration in both directions. The PAUSE generation and PAUSE response functions are both configured as enabled or they are both disabled. You configure symmetric flow control by including the **flow-control** statement at the **[edit interfaces *interface-name* ether-options]** hierarchy level.

*Asymmetric flow control* allows you to configure the PAUSE functionality in each direction independently on an interface. The configuration for generating PAUSE messages and for responding to PAUSE messages does not have to be the same. It can be enabled in both directions, disabled in both directions, or enabled in one direction and disabled in the other direction. You configure asymmetric flow control by including the **configured-flow-control** statement at the **[edit interfaces *interface-name* ether-options]** hierarchy level.

On any particular interface, symmetric and asymmetric flow control are mutually exclusive. Asymmetric flow control overrides and disables symmetric flow control. (If PFC is configured on an interface, the PFC configuration overrides Ethernet PAUSE flow control.) The QFX Series supports both symmetric and asymmetric flow control.

- [Symmetric Flow Control on page 4939](#)
- [Asymmetric Flow Control on page 4940](#)

### ***Symmetric Flow Control***

Symmetric flow control configures both the receive and transmit buffers in the same state. The interface can both send PAUSE messages and respond to them (flow control is enabled), or the interface cannot send PAUSE messages or respond to them (flow control is disabled).

When you enable symmetric flow control on an interface, the PAUSE behavior depends on the configuration of the connected peer. With symmetric flow control enabled, the



interface can perform any PAUSE functions that the connected peer can perform. (When symmetric flow control is disabled, the interface does not send or respond to PAUSE messages.)

### **Asymmetric Flow Control**

Asymmetric flow control enables you to specify independently whether or not the interface receive buffer generates and sends PAUSE messages to stop the connected peer from transmitting traffic, and whether or not the interface transmit buffer responds to PAUSE messages it receives from the connected peer and stops transmitting traffic. The receive buffer configuration determines if the interface transmits PAUSE messages, and the transmit buffer configuration determines if the interface receives and responds to PAUSE messages:

- Receive buffers on—Enable PAUSE transmission (generate and send PAUSE frames)
- Transmit buffers on—Enable PAUSE reception (respond to received PAUSE frames)

You must explicitly set the flow control for both the receive buffer and the transmit buffer (**on** or **off**) to configure asymmetric PAUSE. [Table 309 on page 4478](#) describes the configured flow control state when you set the receive (Rx) and transmit (Tx) buffers on an interface:

**Table 411: Asymmetric Ethernet PAUSE Flow Control Configuration**

Receive (Rx) Buffer	Transmit (Tx) Buffer	Configured Flow Control State
On	Off	Interface generates and sends Ethernet PAUSE messages. Interface does not respond to PAUSE messages (interface continues to transmit even if peer requests that the interface stop sending traffic).
Off	On	Interface responds to Ethernet PAUSE messages received from the connected peer, but does not generate or send PAUSE messages. (The interface does not request that the connected peer stop sending traffic.)
On	On	Same functionality as symmetric Ethernet PAUSE. Interface generates and sends PAUSE messages and responds to received PAUSE messages.
Off	Off	Ethernet PAUSE flow control is disabled.

The configured flow control is the PAUSE state configured on the interface.

On 1-Gigabit Ethernet interfaces, the QFX Series supports autonegotiation of Ethernet PAUSE with the connected peer. (The QFX Series does not support autonegotiation on 10-Gigabit Ethernet interfaces.) Autonegotiation enables the interface to exchange state advertisements with the connected peer so that the two devices can agree on the PAUSE configuration. Each interface advertises its flow control state to the connected peer using a combination of the PAUSE and ASM\_DIR bits, as described in [Table 310 on page 4479](#):



Table 412: Flow Control State Advertised to the Connected Peer (Autonegotiation)

Rx Buffer State	Tx Buffer State	PAUSE Bit	ASM_DIR Bit	Description
Off	Off	0	0	The interface advertises no PAUSE capability. This is equivalent to disabling flow control on an interface.
On	On	1	0	The interface advertises symmetric flow control (both the transmission of PAUSE messages and the ability to receive and respond to PAUSE messages).
On	Off	0	1	The interface advertises asymmetric flow control (the transmission of PAUSE messages, but not the ability to receive and respond to PAUSE messages).
Off	On	1	1	The interface advertises both symmetric and asymmetric flow control. Although the interface does not generate and send PAUSE requests to the peer, the interface supports both symmetric and asymmetric PAUSE configuration on the peer because the peer is not affected if the peer does not receive PAUSE requests. (If the interface responds to the peer's PAUSE requests, that is sufficient to support either symmetric or asymmetric flow control on the peer.)

The flow control configuration on each switch interface interacts with the flow control configuration of the connected peer. Each peer advertises its state to the other peer. The interaction of the flow control configuration of the peers determines the flow control behavior (resolution) between them, as shown in [Table 311 on page 4480](#). The first four columns show the PAUSE configuration on the local QFX Series and on the connected peer (also known as the link partner). The last two columns show the PAUSE resolution that results from the local and peer configurations on each interface. This illustrates how the PAUSE configuration of each interface affects the PAUSE behavior on the other interface.



**NOTE:** In the Resolution columns of the table, disabling PAUSE transmit means that the interface receive buffers do not generate and send PAUSE messages to the peer. Disabling PAUSE receive means that the interface transmit buffers do not respond to PAUSE messages received from the peer.



Table 413: Asymmetric Ethernet PAUSE Behavior on Local and Peer Interfaces

Local Interface (QFX Series)		Peer Interface		Local Resolution	Peer Resolution
PAUSE Bit	ASM_DIR Bit	PAUSE Bit	ASM_DIR Bit		
0	0	Don't care	Don't care	Disable PAUSE transmit and receive	Disable PAUSE transmit and receive
0	1	0	Don't care	Disable PAUSE transmit and receive	Disable PAUSE transmit and receive
0	1	1	0	Disable PAUSE transmit and receive	Disable PAUSE transmit and receive
0	1	1	1	Enable PAUSE transmit and disable PAUSE receive	Disable PAUSE transmit and enable PAUSE receive
1	0	0	Don't care	Disable PAUSE transmit and receive	Disable PAUSE transmit and receive
1	0	1	Don't care	Enable PAUSE transmit and receive	Enable PAUSE transmit and receive
1	1	0	0	Disable PAUSE transmit and receive	Disable PAUSE transmit and receive
1	1	0	1	Enable PAUSE receive and disable PAUSE transmit	Enable PAUSE transmit and disable PAUSE receive
1	1	Don't care	Don't care	Enable PAUSE transmit and receive	Enable PAUSE transmit and receive



**NOTE:** For your convenience, [Table 311 on page 4480](#) replicates Table 28B-3 of Section 2 of the IEEE 802.X specification.

## PFC

PFC is a lossless transport and congestion relief feature that works by providing granular link-level flow control for each IEEE 802.1p code point (priority) on a full-duplex Ethernet link. When the switch receive buffer fills to a threshold, the switch sends a pause frame to the sender to temporarily stop the sender from transmitting more frames. The buffer threshold must be low enough so that the sender has time to stop transmitting frames and the receiver can accept the frames already on the wire before the buffer overflows. The switch automatically sets queue buffer thresholds to prevent frame loss.

All of the other priorities on the link continue to send frames. Only the frames sent with the paused priority are not transmitted. When the receive buffer empties below another threshold, the switch sends a message that starts the flow again.



Configure PFC for a priority end to end along the entire data path to create a lossless lane of traffic on the network. You can selectively pause the traffic in any queue without pausing the traffic for other queues on the same link. You can create lossless lanes for traffic such as Fibre Channel over Ethernet (FCoE), LAN backup, or management while using standard frame-drop congestion management for IP traffic on the same link.

Potential consequences of link-level flow control are:

- Head-of-line blocking
- A paused priority that caused upstream devices to pause the same priority, thus spreading congestion back through the network

By definition, PFC supports symmetric pause only (as opposed to Ethernet PAUSE, which supports symmetric and asymmetric pause). With symmetric pause, a device can:

- Transmit pause frames to pause incoming traffic.
- Receive pause frames and stop sending traffic to a device whose buffer is too full to accept more frames.

When it receives a PFC frame, the QFX Series pauses traffic on egress queues based on the priorities that the PFC pause frame identifies. The priorities are 0 through 7. By default, the priorities map to queue numbers 0 through 7, respectively, and to specific forwarding classes, as shown in [Table 312 on page 4481](#):

**Table 414: Default PFC Priority to Queue and Forwarding Class Mapping**

IEEE 802.1p Priority (Code Point)	Queue	Forwarding Class
0 (000)	0	best-effort
1 (001)	1	best-effort
2 (010)	2	best-effort
3 (011)	3	fcoe
4 (100)	4	no-loss
5 (101)	5	best-effort
6 (110)	6	network-control
7 (111)	7	network-control

For example, when the QFX Series receives a PFC pause frame that pauses priority 3, queue 3 is paused. If you do not want to use the default configuration, you can configure customized mapping of priorities to different queues and forwarding classes.





**NOTE:** By convention, deployments with converged server access typically use IEEE 802.1p priority 3 for FCoE traffic. The default forwarding class configuration sets the `fcoe` forwarding class as a lossless forwarding class that is mapped to queue 3, and default classifiers map incoming priority 3 traffic to the `fcoe` forwarding class. However, you must apply PFC to the entire FCoE data path to configure the end-to-end lossless behavior that FCoE traffic requires. If your network uses priority 3 for FCoE traffic, we recommend that you use the default configuration. If your network uses a priority other than 3 for FCoE traffic, you can configure lossless FCoE transport on any IEEE 802.1p priority as described in [“Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows” on page 4896](#) and [“Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway” on page 4911](#).

You enable PFC on a priority on an ingress interface by configuring an input CNP and then associating the CNP with an interface. The CNP enables PFC on a specified IEEE 802.1 code point. When you associate the CNP with an interface, ingress traffic mapped to that priority uses PFC to pause transmission whenever the queue buffer fills to the pause threshold.

Although unicast traffic and multdestination (multicast, broadcast, and destination lookup fail) traffic must use different classifiers, you can map a unicast queue (queue 0 through 7) and a multdestination queue (queue 8, 9, 10, or 11) to the same PFC priority so that both unicast and multicast traffic use that priority. Do not map multdestination traffic to lossless priorities. Starting with Junos OS Release 12.3, you can map one priority to multiple output queues.



**NOTE:** You can attach a maximum of one CNP to an interface, but you can create an unlimited number of CNPs.

---

### Lossless Transport Support

---

The QFX Series supports up to six lossless forwarding classes. For lossless transport, you must enable PFC on the IEEE 802.1p priority (code point) of lossless forwarding classes.

The following limitation applies to support lossless transport on QFabric systems only:

- The internal cable length from the QFabric system Node device to the QFabric system Interconnect device cannot exceed 150 meters.

The default CoS configuration provides two lossless forwarding classes, `fcoe` and `no-loss`. If you explicitly configure lossless forwarding classes, you must include the `no-loss` packet drop attribute to enable lossless behavior, or the traffic is not lossless. For both default and explicit configuration, you must configure CNPs to enable PFC on the priority of the lossless traffic.





**NOTE:** Junos OS Release 12.2 introduced changes to the way the QFX Series handles lossless forwarding classes (the fcoe and no-loss forwarding classes).

In Junos OS Release 12.1, both explicitly configuring the the fcoe and no-loss forwarding classes and using the default configuration for these forwarding classes resulted in the same lossless behavior for traffic mapped to those forwarding classes.

However, in Junos OS Release 12.2, if you explicitly configure the fcoe or the no-loss forwarding class, that forwarding class is no longer treated as a lossless forwarding class. Traffic mapped to these forwarding classes is treated as lossy (best-effort) traffic. This is true even if the explicit configuration is exactly the same as the default configuration.

If your CoS configuration from Junos OS Release 12.1 or earlier includes the explicit configuration of the fcoe or the no-loss forwarding class, then when you upgrade to Junos OS Release 12.2, those forwarding classes are not lossless. To preserve the lossless treatment of these forwarding classes, delete the the explicit fcoe and no-loss forwarding class configuration before you upgrade to Junos OS Release 12.2.

See “[Overview of CoS Changes Introduced in Junos OS Release 12.2](#)” on [page 4820](#) for detailed information about this change and how to delete an existing lossless configuration.

In Junos OS Release 12.3, the default behavior of the fcoe and no-loss forwarding classes is the same as in Junos OS Release 12.2. However, in Junos OS Release 12.3, you can configure up to six lossless forwarding classes. All explicitly configured lossless forwarding classes must include the new no-loss packet drop attribute or the forwarding class is lossy.

#### Related Documentation

- [Overview of CoS Changes Introduced in Junos OS Release 12.2 on page 4820](#)
- [Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896](#)
- [Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 4911](#)
- [Understanding DCB Features and Requirements on page 4389](#)
- [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
- [Enabling and Disabling CoS Symmetric Ethernet PAUSE Flow Control on page 5148](#)
- [Configuring CoS Asymmetric Ethernet PAUSE Flow Control on page 5149](#)
- [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)



## Understanding DCBX

Data Center Bridging Capability Exchange protocol (DCBX) is an extension of Link Layer Data Protocol (LLDP). If you disable LLDP on an interface, that interface cannot run DCBX. If you attempt to enable DCBX on an interface on which LLDP is disabled, the configuration commit operation fails. Data center bridging (DCB) devices use DCBX to exchange configuration information with directly connected peers.

This topic describes:

- [DCBX Basics on page 4946](#)
- [DCBX Modes and Support on page 4947](#)
- [DCBX Attribute Types on page 4950](#)
- [DCBX Application Protocol TLV Exchange on page 4951](#)
- [DCBX and PFC on page 4952](#)
- [DCBX and ETS on page 4952](#)

---

### DCBX Basics

DCBX can:

- Discover the DCB capabilities of peers.
- Detect DCB feature misconfiguration or mismatches between peers.
- Configure DCB features on peers.

You can configure DCBX operation for priority-based flow control (PFC), Layer 2 and Layer 4 applications such as FCoE and iSCSI, and ETS. DCBX is enabled or disabled on a per-interface basis.

By default, for PFC and ETS, DCBX automatically negotiates administrative state and configuration with each interface's connected peer. To enable DCBX negotiation for applications, you must configure the applications, map them to IEEE 802.1p code points in an application map, and apply the application map to interfaces.

The FCoE application only needs to be included in an application map when you want an interface to exchange type, length, and values (TLVs) for other applications in addition to FCoE. If FCoE is the only application you want an interface to advertise, then you do not need to use an application map. For ETS, DCBX pushes the switch configuration to peers if they are set to learn the configuration from the switch (unless you disable sending the ETS recommendation TLV on interfaces in IEEE DCBX mode).

You can override the default behavior for PFC, for ETS, or for all applications mapped to an interface by turning off autonegotiation to force an interface to enable or disable that feature. You can also disable DCBX autonegotiation for applications on an interface by excluding those applications from the application map you apply to that interface or by deleting the application map from the interface.

The default autonegotiation behavior for applications that are mapped to an interface is:



- DCBX is enabled on the interface if the connected peer device also supports DCBX.
- DCBX is disabled on the interface if the connected peer device does not support DCBX.

During negotiation of capabilities, the switch can push the PFC configuration to an attached peer if the peer is configured as “willing” to learn the PFC configuration from other peers. The Juniper Networks switch does not support self autoprovisioning and does not change its configuration during autonegotiation to match the peer configuration. (The Juniper switch is not “willing” to learn the PFC configuration from peers.)



**NOTE:** When a port with DCBX enabled begins to exchange type, length, and value (TLV) entries, optional LLDP TLVs on that port are not advertised to neighbors, so that the switch can interoperate with a wider variety of converged network adapters (CNAs) and Layer 2 switches that support DCBX.

### DCBX Modes and Support

This section describes DCBX support on the QFX Series:

- [DCBX Modes \(Versions\) on page 4947](#)
- [Autonegotiation on page 4949](#)
- [CNA Support for DCBX Modes on page 4950](#)
- [Interface Support for DCBX on page 4950](#)

#### **DCBX Modes (Versions)**

The QFX Series supports the two most common DCBX modes:

- IEEE DCBX—The newest DCBX version. Different TLVs have different subtypes (for example, the subtype for the ETS configuration TLV is 9); the IEEE DCBX Organizationally Unique Identifier (OUI) is 0x0080c2.
- DCBX version 1.01—The Converged Enhanced Ethernet (CEE) version of DCBX. It has a subtype of 2 and an OUI of 0x001b21.

IEEE DCBX and DCBX version 1.01 differ mainly in frame format. DCBX version 1.01 uses one TLV that includes all DCBX attribute information, which is sent as sub-TLVs. IEEE DCBX uses a unique TLV for each DCB attribute.



**NOTE:** The QFX Series does not support pre-CEE (pre-DCB) DCBX versions. Unsupported older versions of DCBX have a subtype of 1 and an OUI of 0x001b21. The QFX Series drops LLDP frames that contain pre-CEE DCBX TLVs.

[Table 308 on page 4465](#) summarizes the differences between IEEE DCBX and DCBX version 1.01, including show command output:



**Table 415: Summary of Differences Between IEEE DCBX and DCBX Version 1.01**

Characteristic	IEEE DCBX	DCBX Version 1.01
OUI	0x0080c2	0x001b21
Frame Format	Sends a separate, unique TLV for each DCBX attribute. For example, IEEE DCBX uses separate TLVs for ETS, PFC, and each application. Configuration and Recommendation information is sent in different TLVs	Sends one TLV that includes all DCBX attribute information organized in sub-TLVs. The “willing” bit determines whether or not an interface can change its configuration to match the connected peer.
Symmetric/asymmetric configuration with peer	Asymmetric or symmetric	Symmetric only
Differences in the <b>show dcbx interface interface-name</b> operational command	<ul style="list-style-type: none"> <li>• Synchronization information is not shown because symmetric configuration is not required.</li> <li>• Operational state information is not shown because the operational states do not have to be symmetric.</li> <li>• TLV type is shown because unique TLVs are sent for each DCBX attribute.</li> <li>• ETS peer Configuration TLV and Recommendation TLV information is shown separately because they are different TLVs.</li> </ul>	<ul style="list-style-type: none"> <li>• Synchronization information is shown because symmetric configuration is required.</li> <li>• Operational state information is shown because the operational states do have to be symmetric.</li> <li>• TLV type is not shown because one TLV is used for all attribute information.</li> <li>• Recommendation TLV is not sent (DCBX Version 1.01 uses the “willing” bit to determine whether or not an interface uses the peer interface configuration).</li> </ul>

For more information about how each DCBX mode exchanges TLVs, see the following specifications:

- For DCBX version 1.01—<http://www.ieee802.org/1/files/public/docs2008/az-wadelaar-dcbx-capability-exchange-discovery-protocol-T108-v101.pdf>
- For IEEE DCBX—<http://www.ieee802.org/1/files/private/az-drafts/d2/802-1az-d2-4.pdf>



**NOTE:** As of Junos OS Release 12.2, this document is located in a private area of the IEEE website, and access requires a password from the IEEE organization. If you are not an IEEE member, you might not be able to access this document until it moves to the public area of the IEEE website.

You can configure interfaces to use the following DCBX modes:

- IEEE DCBX—The interface uses IEEE DCBX regardless of the configuration on the connected peer.



- DCBX version 1.01—The interface uses DCBX version 1.01 regardless of the configuration on the connected peer.
- Autonegotiation—The interface automatically negotiates with the connected peer to determine the DCBX version the peers use. Autonegotiation is the default DCBX mode.

If you configure a DCBX mode on an interface, the interface ignores DCBX protocol data units (PDUs) it receives from the connected peer if the PDUs do not match the DCBX version configured on the interface. For example, if you configure an interface to use IEEE DCBX and the connected peer sends DCBX version 1.01 LLDP PDUs, the interface ignores the version 1.01 PDUs. If you configure an interface to use DCBX version 1.01 and the peer sends IEEE DCBX LLDP PDUs, the interface ignores the IEEE DCBX PDUs.



**NOTE:** On interfaces that use the IEEE DCBX mode, the `show dcbx neighbors interface interface-name operational` command does not include application, PFC, or ETS operational state in the output.

### ***Autonegotiation***

Autonegotiation is the default DCBX mode. Each interface automatically negotiates with its connected peer to determine the DCBX version that both interfaces use to exchange DCBX information.

When an interface connects to its peer interface, the interface advertises IEEE DCBX TLVs to the peer. If the interface receives one IEEE DCBX PDU from the peer, the interface sets the DCBX mode as IEEE DCBX. If the interface receives three DCBX version 1.01 TLVs from the peer, the interface sets DCBX version 1.01 as the DCBX mode.

Autonegotiation works slightly differently on QFX3500 switches and QFabric systems:

- QFX3500 switch—When an interface connects to its peer interface, the interface advertises IEEE DCBX TLVs to the peer. If the interface receives an IEEE DCBX TLV from the peer, the interface sets IEEE DCBX as the DCBX mode. If the interface receives three consecutive DCBX version 1.01 TLVs from the peer, the interface sets DCBX version 1.01 as the DCBX mode.
- QFabric system—When an interface connects to its peer interface, the interface advertises DCBX version 1.01 TLVs to the peer. If the interface receives an IEEE DCBX TLVs from the peer, the interface sets IEEE DCBX as the DCBX mode. If the interface receives three consecutive DCBX version 1.01 TLVs from the peer, the interface retains DCBX version 1.01 as the DCBX mode.



**NOTE:** If the link flaps or the LLDP process restarts, the interface starts the autonegotiation process again. The interface does not use the last received DCBX communication mode.



### ***CNA Support for DCBX Modes***

Different CNA vendors support different versions and capabilities of DCBX. The DCBX configuration you use on QFX Series interfaces depends on the DCBX features that the CNAs in your network support.

### ***Interface Support for DCBX***

You can configure DCBX on 10-Gigabit Ethernet interfaces and on link aggregation group (LAG) interfaces whose member interfaces are all 10-Gigabit Ethernet interfaces.

### ***DCBX Attribute Types***

---

DCBX has three attribute types:

- **Informational**—These attributes are exchanged using LLDP, but do not affect DCBX state or operation; they only communicate information to the peer. For example, application priority TLVs are informational TLVs.
- **Asymmetric**—The values for these types of attributes do not have to be the same on the connected peer interfaces. Peers exchange asymmetric attributes when the attribute values can differ on each peer interface. The peer interface configurations might match or they might differ. For example, ETS Configuration and Recommendation TLVs are asymmetric TLVs.
- **Symmetric**—The intention is that the values for these types of attributes should be the same on both of the connected peer interfaces. Peer interfaces exchange symmetric attributes to ensure symmetric DCBX configuration for those attributes. For example, PFC Configuration TLVs are symmetric TLVs.

The following sections describe asymmetric and symmetric DCBX attributes:

- [Asymmetric Attributes on page 4950](#)
- [Symmetric Attributes on page 4951](#)

### ***Asymmetric Attributes***

DCBX passes asymmetric attributes between connected peer interfaces to communicate parameter information about those attributes (features). The resulting configuration for an attribute might be different on each peer, so the parameters configured on one interface might not match the parameters on the connected peer interface.

There are two types of asymmetric attribute TLVs:

- **Configuration TLV**—Configuration TLVs communicate the current operational state and the state of the “willing” bit. The “willing” bit communicates whether or not the interface is willing to accept and use the configuration from the peer interface. If an interface is “willing,” the interface uses the configuration it receives from the peer interface. (The peer interface configuration can override the configuration on the “willing” interface.) If an interface is “not willing,” the configuration on the interface cannot be overridden by the peer interface configuration.
- **Recommendation TLV**—Recommendation TLVs communicate the parameters the interface recommends that the connected peer interface should use. When an interface



sends a Recommendation TLV, if the connected peer is “willing,” the connected peer changes its configuration to match the parameters in the Recommendation TLV.

### ***Symmetric Attributes***

DCBX passes symmetric attributes between connected peer interfaces to communicate parameter information about those attributes (features), with the objective that both interfaces should use the same configuration. The intent is that the parameters configured on one interface should match the parameters on the connected peer interface.

There is one type of symmetric attribute TLV, the Configuration TLV. As with asymmetric attributes, symmetric attribute Configuration TLVs communicate the current operational state and the state of the “willing” bit. “Willing” interfaces use the peer interface parameter values for the attribute. (The attribute configuration of the peer overrides the configuration on the “willing” interface.)

### **DCBX Application Protocol TLV Exchange**

DCBX advertises the switch’s capabilities for Layer 2 applications such as FCoE and Layer 4 applications such as iSCSI:

- [Application Protocol TLV Exchange on page 4951](#)
- [FCoE Application Protocol TLV Exchange on page 4951](#)
- [Disabling Application Protocol TLV Exchange on page 4952](#)

### ***Application Protocol TLV Exchange***

For all applications, DCBX advertises the application’s state and IEEE 802.1p code points on the interfaces to which the application is mapped. If an application is not mapped to an interface, that interface does not advertise the application’s TLVs. There is an exception for FCoE application protocol TLV exchange when FCoE is the only application you want DCBX to advertise on an interface.

### ***FCoE Application Protocol TLV Exchange***

Protocol TLV exchange for the FCoE application depends on whether FCoE is the only application you want the interface to advertise or whether you want the interface to exchange other application TLVs in addition to FCoE TLVs.

If FCoE is the only application you want DCBX to advertise on an interface, DCBX exchanges FCoE application protocol TLVs by default if the interface:

- Carries FCoE traffic (traffic mapped by CoS configuration to the FCoE forwarding class)
- Has a congestion notification profile with PFC enabled on the FCoE priority (IEEE 802.1p code point)
- Does *not* have an application map



**NOTE:** If no CoS configuration for FCoE is mapped to an interface, that interface does not exchange FCoE application protocol TLVs.



If you want DCBX to advertise FCoE and other applications on an interface, you must specify all of the applications, including FCoE, in an application map, and apply the application map to the desired interfaces.



**NOTE:** If an application map is applied to an interface, the FCoE application must be explicitly configured in the application map, or the interface does not exchange FCoE TLVs.

When DCBX advertises the FCoE application, it advertises the FCoE state and IEEE 802.1p code points. If a peer device connected to a switch interface does not support FCoE, DCBX uses autonegotiation to mark the interface as “FCoE down,” and FCoE is disabled on that interface.

#### ***Disabling Application Protocol TLV Exchange***

To disable DCBX application protocol exchange for all applications on an interface, issue the **set protocols dcbx interface *interface-name* applications no-auto-negotiation** command.

You can also disable DCBX application protocol exchange for applications on an interface by deleting the application map from the interface, or by deleting a particular application from the application map. However, when you delete an application from an application map, the application protocol is no longer exchanged on any interface which uses that application map.

---

#### **DCBX and PFC**

After you enable PFC on a switch interface, DCBX uses autonegotiation to control the operational state of the PFC functionality.

If the peer device connected to the interface supports PFC and is provisioned compatibly with the switch, DCBX sets the PFC operational state to enabled. If the peer device connected to the interface does not support PFC or is not provisioned compatibly with the switch, DCBX sets the operational state to disabled. (PFC must be symmetrical.)

If the peer advertises that it is “willing” to learn its PFC configuration from the switch, DCBX pushes the switch’s PFC configuration to the peer and does not check the peer’s administrative state.

You can manually override DCBX control of the PFC operational state on a per-interface basis by disabling autonegotiation. If you disable autonegotiation on an interface on which you have configured PFC, then PFC is enabled on that interface regardless of the peer configuration. To disable PFC on an interface, do not configure PFC on that interface.

---

#### **DCBX and ETS**

This section describes:

- [Default DCBX ETS Advertisement on page 4953](#)
- [ETS Advertisement and Peer Configuration on page 4953](#)
- [ETS Recommendation TLV on page 4953](#)



### ***Default DCBX ETS Advertisement***

If you do not configure ETS on an interface, the switch automatically creates a default priority group that contains all of the priorities (forwarding classes, which represent output queues) and assigns 100 percent of the port output bandwidth to that priority group. The default priority group is transparent. It does not appear in the configuration and is used for DCBX advertisement. DCBX advertises the default priority group, its priorities, and the assigned bandwidth.

If you configure ETS on an interface, DCBX advertises:

- Each priority group on the interface
- The priorities in each priority group
- The bandwidth properties of each priority group and priority

Any priority on that interface that is not part of an explicitly configured priority group (forwarding class set) is assigned to the automatically generated default priority group and receives no bandwidth. If you configure ETS on an interface, every forwarding class (priority) on that interface for which you want to forward traffic must belong to a forwarding class set (priority group).

### ***ETS Advertisement and Peer Configuration***

DCBX does not control the switch's ETS (hierarchical scheduling) operational state. If the connected peer is configured as "willing," DCBX pushes the switch's ETS configuration to the switch's peers if the ETS Recommendation TLV is enabled (it is enabled by default). If the peer does not support ETS or is not consistently provisioned with the switch, DCBX does not change the ETS operational state on the switch. The ETS operational state remains enabled or disabled based only on the switch hierarchical scheduling configuration and is enabled by default.

When ETS is configured, DCBX advertises the priority groups, the priorities in the priority groups, and the bandwidth configuration for the priority groups and priorities. Any priority (essentially a forwarding class or queue) that is not part of a priority group has no scheduling properties and receives no bandwidth.

You can manually override whether DCBX advertises the ETS state to the peer on a per-interface basis by disabling autonegotiation. This does not affect the ETS state on the switch or on the peer, but it does prevent the switch from sending the Recommendation TLV or the Configuration TLV to the connected peer. To disable ETS on an interface, do not configure priority groups (forwarding class sets) on the interface.

### ***ETS Recommendation TLV***

The ETS Recommendation TLV communicates the ETS settings that the switch wants the connected peer interface to use. If the peer interface is "willing," it changes its configuration to match the configuration in the ETS Recommendation TLV. By default, the switch interfaces send the ETS Recommendation TLV to the peer. The settings communicated are the egress ETS settings defined by configuring hierarchical scheduling on the interface.



We recommend that you use the same ETS settings on the connected peer that you use on the switch interface and that you leave the ETS Recommendation TLV enabled. However, on interfaces that use IEEE DCBX as the DCBX mode, if you want an asymmetric configuration between the switch interface and the connected peer, you can disable the ETS Recommendation TLV by including the **recommendation-tlv no-auto-negotiation** statement at the **[edit protocols dcbx interface *interface-name* enhanced-transmission-selection]** hierarchy level.



**NOTE:** You can disable the ETS Recommendation TLV only when the DCBX mode on the interface is IEEE DCBX. Disabling the ETS Recommendation TLV has no effect if the DCBX mode on the interface is DCBX version 1.01. (IEEE DCBX uses separate application attribute TLVs, but DCBX version 1.01 sends all application attributes in the same TLV and uses sub-TLVs to separate the information.)

If you disable the ETS Recommendation TLV, the switch still sends the ETS Configuration TLV to the connected peer. The result is that the connected peer is informed about the switch DCBX ETS configuration, but even if the peer is “willing,” the peer does not change its configuration to match the switch configuration. This is asymmetric configuration—the two interfaces can have different parameter values for the ETS attribute.

For example, if you want a CNA connected to a switch interface to have different bandwidth allocations than the switch ETS configuration, you can disable the ETS Recommendation TLV and configure the CNA for the desired bandwidth. The switch interface and the CNA exchange configuration parameters, but the CNA does not change its configuration to match the switch interface configuration.

#### Related Documentation

- [Understanding DCBX Application Protocol TLV Exchange on page 4472](#)
- [Understanding DCB Features and Requirements on page 4389](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)
- [Understanding CoS Hierarchical Port Scheduling \(ETS\) on page 4872](#)
- [Understanding FCoE on page 4392](#)
- [Configuring the DCBX Mode on page 4600](#)
- [Configuring DCBX Autonegotiation on page 4601](#)
- [Disabling the ETS Recommendation TLV on page 4604](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)



## Understanding DCBX Application Protocol TLV Exchange

Data Center Bridging Capability Exchange protocol (DCBX) discovers the data center bridging (DCB) capabilities of connected peers. DCBX also advertises the capabilities of applications on interfaces by exchanging application protocol information through application type, length, and value (TLV) elements. DCBX is an extension of Link Layer Discovery Protocol (LLDP). LLDP must remain enabled on every interface on which you want to use DCBX.



**NOTE:** LLDP and DCBX are enabled by default on all interfaces.

Setting up application protocol exchange consists of:

- Defining applications
- Mapping the applications to IEEE 802.1p code points in an *application map*
- Configuring classifiers to prioritize incoming traffic and map the incoming traffic to the application by the traffic code points
- Applying the application maps and classifiers to interfaces

You need to explicitly define the applications that you want an interface to advertise. The FCoE application is a special case (see [“Applications” on page 4472](#)) and only needs to be defined on an interface if you want DCBX to exchange application protocol TLVs for other applications in addition to FCoE on that interface.

You also need to explicitly map all defined applications that you want an interface to advertise to IEEE 802.1p code points in an application map. The FCoE application is a special case (see [“Application Maps” on page 4473](#)) and only requires inclusion in an application map when you want an interface to use DCBX for other applications in addition to FCoE, as described later in this topic.

This topic describes:

- [Applications on page 4955](#)
- [Application Maps on page 4956](#)
- [Classifying and Prioritizing Application Traffic on page 4957](#)
- [Enabling Interfaces to Exchange Application Protocol Information on page 4958](#)
- [Disabling DCBX Application Protocol Exchange on page 4958](#)

### Applications

Before an interface can exchange application protocol information, you need to define the applications that you want to advertise, except FCoE if FCoE is the only application that you want the interface to advertise.





**NOTE:** If FCoE is the only application that you want DCBX to advertise on an interface, DCBX exchanges FCoE application protocol TLVs by default if the interface:

- Carries FCoE traffic (traffic mapped by CoS configuration to the FCoE forwarding class and applied to the interface)
- Has a congestion notification profile with PFC enabled on the FCoE priority (IEEE 802.1p code point)
- Does *not* have an application map

If you apply an application map to an interface, then all applications that you want DCBX to advertise must be defined and configured in the application map, including the FCoE application.

If no CoS configuration for FCoE is mapped to an interface, that interface does not exchange FCoE application protocol TLVs.

---

You can define:

- Layer 2 applications by EtherType
- Layer 4 applications by a combination of protocol (TCP or UDP) and destination port number

The EtherType is a two-octet field in the Ethernet frame that denotes the protocol encapsulated in the frame. For a list of common EtherTypes, see <http://standards.ieee.org/develop/regauth/ethertype/eth.txt> on the IEEE standards organization website. For a list of port numbers and protocols, see the *Service Name and Transport Protocol Port Number Registry* at <http://www.iana.org/assignments/service-names-port-numbers/service-names-port-numbers.xml> on the Internet Assigned Numbers Authority (IANA) website.

You must explicitly define each application that you want to advertise, except FCoE. The FCoE application is defined by default (EtherType 0x8906).

### Application Maps

---

An application map maps defined applications to one or more IEEE 802.1p code points. Each application map contains one or more applications. DCBX includes the configured application code points in the protocol TLVs exchanged with the connected peer.

To exchange protocol TLVs for an application, you must include the application in an application map. The FCoE application is a special case:

- If you want DCBX to exchange application protocol TLVs for more than one application on a particular interface, you must configure the applications, define an application map to map the applications to code points, and apply the application map to the interface. In this case, you must also define the FCoE application and add it to the application map.



This is the same process and treatment required for all other applications. In addition, for DCBX to exchange FCoE application TLVs, you must enable priority-based flow control (PFC) on the FCoE priority (the FCoE IEEE 802.1p code point) on the interface.

- If FCoE is the only application that you want DCBX to advertise on an interface, then you do not need to configure an application map and apply it to the interface. By default, when an interface has no application map, and the interface carries traffic mapped to the FCoE forwarding class, and PFC is enabled on the FCoE priority, the interface advertises FCoE TLVs (autonegotiation mode). DCBX exchanges FCoE application protocol TLVs by default until you apply an application map to the interface, remove the FCoE traffic from the interface (you can do this by removing the or editing the classifier for FCoE traffic), or disable PFC on the FCoE priority.

If you apply an application map to an interface that did not have an application map and was exchanging FCoE application TLVs, and you do not include the FCoE application in the application map, the interface stops exchanging FCoE TLVs. Every interface that has an application map must have FCoE included in the application map (and PFC enabled on the FCoE priority) in order for DCBX to exchange FCoE TLVs.

Mapping an application to code points does two things:

- Maps incoming traffic with the same code points to that application
- Allows you to configure classifiers that map incoming application traffic, by code point, to a forwarding class and a loss priority, in order to apply class of service (CoS) to application traffic and prioritize application traffic

You apply an application map to an interface to enable DCBX application protocol exchange on that interface for each application specified in the application map. All of the applications that you want an interface to advertise must be configured in the application map that you apply to the interface, with the previously noted exception for the FCoE application when FCoE is the only application for which you want DCBX to exchange protocol TLVs on an interface.

### Classifying and Prioritizing Application Traffic

When traffic arrives at an interface, the interface classifies the incoming traffic based on its code points. Classifiers map code points to loss priorities and forwarding classes. The loss priority prioritizes the traffic. The forwarding class determines the traffic output queue and CoS service level.

When you map an application to an IEEE 802.1p code point in an application map and apply the application map to an interface, incoming traffic on the interface that matches the application code points is mapped to the appropriate application. The application receives the loss priority and the CoS associated with the forwarding class for those code points, and is placed in the output queue associated with the forwarding class.

You can use the default classifier or you can configure a classifier to map the application code points defined in the application map to forwarding classes and loss priorities.



### Enabling Interfaces to Exchange Application Protocol Information

---

Each interface with the **fcoe** forwarding class and PFC enabled on the FCoE code point is enabled for FCoE application protocol exchange by default until you apply an application map to the interface. If you apply an application map to an interface and you want that interface to exchange FCoE application protocol TLVs, you must include the FCoE application in the application map. (In all cases, to achieve lossless transport, you must also enable PFC on the FCoE code point or code points.)

Except when FCoE is the only protocol you want DCBX to advertise on an interface, interfaces on which you want to exchange application protocol TLVs must include the following two items:

- The application map that contains the application(s)
- A classifier



**NOTE:** You must also enable PFC on the code point of any traffic for which you want to achieve lossless transport.

---

### Disabling DCBX Application Protocol Exchange

---

To disable DCBX application protocol exchange for all applications on an interface, issue the **set protocols dcbx interface *interface-name* applications no-auto-negotiation** command.

You can also disable DCBX application protocol exchange for applications on an interface by deleting the application map from the interface, or by deleting a particular application from the application map. However, when you delete an application from an application map, the application protocol is no longer exchanged on any interface which uses that application map.

On interfaces that use IEEE DCBX mode to exchange DCBX parameters, you can disable sending the enhanced transmission selection (ETS) Recommendation TLV to the peer if you want an asymmetric ETS configuration between the peers.

#### Related Documentation

- [Understanding DCBX on page 4463](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Configuring DCBX Autonegotiation on page 4601](#)
- [Disabling the ETS Recommendation TLV on page 4604](#)
- [Defining an Application for DCBX Application Protocol TLV Exchange on page 4604](#)
- [Configuring an Application Map for DCBX Application Protocol TLV Exchange on page 4606](#)
- [Applying an Application Map to an Interface for DCBX Application Protocol TLV Exchange on page 4607](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)



- [Example: Configuring Unicast Classifiers on page 5014](#)







## CHAPTER 59

# Configuration

- [Configuration Examples on page 4961](#)
- [Configuration Tasks on page 5130](#)
- [Configuration Statements on page 5166](#)

### Configuration Examples

---

- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring CoS PFC for FCoE Traffic on page 4983](#)
- [Example: Configuring CoS for FCoE Transit Switch Traffic Across an MC-LAG on page 4991](#)
- [Example: Configuring Unicast Classifiers on page 5014](#)
- [Example: Configuring Multidestination \(Multicast, Broadcast, DLF\) Classifiers on page 5017](#)
- [Example: Configuring Tail-Drop Profiles on page 5019](#)
- [Example: Configuring Drop Profile Maps on page 5022](#)
- [Example: Configuring Forwarding Classes on page 5024](#)
- [Example: Configuring Forwarding Class Sets on page 5027](#)
- [Example: Configuring Queue Schedulers on page 5030](#)
- [Example: Configuring Queue Scheduling Priority on page 5035](#)
- [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)
- [Example: Configuring Minimum Guaranteed Output Bandwidth on page 5040](#)
- [Example: Configuring Maximum Output Bandwidth on page 5044](#)
- [Example: Configuring Lossless FCoE Traffic When the Converged Ethernet Network Does Not Use IEEE 802.1p Priority 3 for FCoE Traffic \(FCoE Transit Switch\) on page 5048](#)
- [Example: Configuring Two or More Lossless FCoE Priorities on the Same FCoE Transit Switch Interface on page 5056](#)
- [Example: Configuring Two or More Lossless FCoE IEEE 802.1p Priorities on Different FCoE Transit Switch Interfaces on page 5065](#)
- [Example: Configuring Lossless IEEE 802.1p Priorities on Ethernet Interfaces for Multiple Applications \(FCoE and iSCSI\) on page 5078](#)
- [Example: Configuring IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 5094](#)



- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Best-Effort Unicast Traffic on page 5103](#)
- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Multicast Traffic on page 5109](#)
- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Lossless Traffic on page 5114](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 5120](#)

## Example: Configuring CoS Hierarchical Port Scheduling (ETS)

Hierarchical port scheduling defines the class-of-service (CoS) properties of output queues, which are mapped to forwarding classes (forwarding classes are mapped to IEEE 802.1p priorities, so mapping queues to forwarding classes also maps queues to priorities). Hierarchical port scheduling enables you to group priorities that require similar CoS resources into priority groups. You define the port bandwidth resources for a priority group, and you define the amount of the priority group's resources that each priority in the group can use.

Hierarchical port scheduling is the Junos OS implementation of enhanced transmission selection (ETS, described in IEEE 802.1Qaz). One major benefit of hierarchical port scheduling is greater port bandwidth utilization. If a priority group on a port does not use all of its allocated bandwidth, other priority groups on that port can use that bandwidth. Also, if a priority within a priority group does not use its allocated bandwidth, other priorities within that priority group can use that bandwidth.

Configuring hierarchical scheduling is a multistep procedure that includes:

- Mapping forwarding classes to queues
- Defining forwarding class sets (priority groups)
- Defining behavior aggregate classifiers
- Configuring priority-based flow control (PFC) for lossless priorities (queues)
- Applying classifiers and PFC configuration to ingress interfaces
- Defining drop profiles
- Defining schedulers
- Mapping forwarding classes to schedulers
- Defining traffic control profiles
- Assigning priority groups and traffic control profiles to egress ports

This example describes how to configure hierarchical scheduling:

- [Requirements on page 4963](#)
- [Overview on page 4963](#)
- [Configuration on page 4966](#)
- [Verification on page 4974](#)



## Requirements

This example uses the following hardware and software components:

- One Juniper Networks QFX3500 Switch
- Junos OS Release 11.1 or later for the QFX Series

## Overview

Keep the following considerations in mind when you plan the port bandwidth allocation for priority groups and for individual priorities:

- How much traffic and what types of traffic you expect to traverse the system.
- How you want to divide different types of traffic into priorities (forwarding classes, also called queues) to apply different CoS treatment to the traffic. Dividing traffic into priorities includes:
  - Mapping the code points of ingress traffic to forwarding classes using behavior aggregate (BA) classifiers. This classifies incoming traffic into the appropriate forwarding class.
  - Mapping forwarding classes to output queues. This defines the output queue for each type of traffic.
  - Attaching the BA classifier to the desired ingress interfaces so that incoming traffic maps to the desired forwarding classes and queues.
- How you want to organize priorities into priority groups (forwarding class sets).
 

Traffic that requires similar treatment usually belongs in the same priority group. To do this, place forwarding classes that require similar bandwidth, loss, and other characteristics in the same forwarding class set. For example, you can map all types of best-effort traffic forwarding classes into one forwarding class set.
- How much of the port bandwidth you want to allocate to each priority group and to each of the priorities in each priority group. The following considerations apply to bandwidth allocation:
  - Estimate how much traffic you expect in each forwarding class (output queue) and how much traffic you expect in each forwarding class set (the aggregate amount of traffic in the forwarding classes that belong to the forwarding class set).
  - The combined minimum guaranteed bandwidth of the priorities (forwarding classes) in a priority group should not exceed the minimum guaranteed bandwidth of the priority group. The transmit rate scheduler parameter defines the minimum guaranteed bandwidth for forwarding classes. Scheduler maps associate schedulers with forwarding classes.
  - The combined minimum guaranteed bandwidth of the priority groups (forwarding class sets) on a port should not exceed the port's total bandwidth. Traffic control profiles define the minimum bandwidth for a forwarding class set. Associating a scheduler map with a traffic control profile sets the scheduling for the individual forwarding classes in the forwarding class set.



This example creates hierarchical port scheduling by defining priority groups for best effort, guaranteed delivery, and high-performance computing (HPC) traffic. Each priority group includes priorities that need to receive similar CoS treatment. Each priority group and each priority within each priority group receive the CoS resources needed to service their flows. Lossless priorities use PFC to prevent packet loss when the network experiences congestion.

### Topology

Table 416 on page 4964 shows the configuration components for this example.

**Table 416: Components of the Hierarchical Port Scheduling (ETS) Configuration Topology**

Property	Settings
Hardware	QFX3500 switch
Mapping of forwarding classes (priorities) to queues	<p><b>best-effort</b> to queue 0</p> <p><b>be</b> to queue 1</p> <p><b>fcoe</b> (Fibre Channel over Ethernet) to queue 3</p> <p><b>no-loss</b> to queue 4</p> <p><b>hpc</b> (high-performance computing) to queue 5</p> <p><b>network-control</b> to queue 7</p> <p><b>NOTE:</b> If you are using Junos OS Release 12.2 or later, use the default forwarding-class-to-queue mapping for the lossless <b>fcoe</b> and <b>no-loss</b> forwarding classes. If you explicitly configure the default lossless forwarding classes, the traffic mapped to those forwarding classes is treated as lossy (<b>best-effort</b>) traffic and does <i>not</i> receive lossless treatment.</p> <p>In Junos OS Release 12.3 and later, you can include the <i>no-loss</i> packet drop attribute in the explicit forwarding class configuration to configure a lossless forwarding class.</p>
Forwarding class sets (priority groups)	<p><b>best-effort-pg:</b> contains forwarding classes <b>best-effort</b>, <b>be</b>, and <b>network control</b></p> <p><b>guar-delivery-pg:</b> contains forwarding classes <b>fcoe</b> and <b>no-loss</b></p> <p><b>hpc-pg:</b> contains forwarding class <b>hpc</b></p>
Behavior aggregate classifier (maps forwarding classes and loss priorities to incoming packets by IEEE 802.1 code point)	<p>Name—<b>hsclassifier1</b></p> <p>Code point mapping:</p> <ul style="list-style-type: none"> <li>• <b>000</b> to forwarding class <b>best-effort</b> and loss priority <b>low</b></li> <li>• <b>001</b> to forwarding class <b>be</b> and loss priority <b>high</b></li> <li>• <b>011</b> to forwarding class <b>fcoe</b> and loss priority <b>low</b></li> <li>• <b>100</b> to forwarding class <b>no-loss</b> and loss priority <b>low</b></li> <li>• <b>101</b> to forwarding class <b>hpc</b> and loss priority <b>low</b></li> <li>• <b>110</b> to forwarding class <b>network-control</b> and loss priority <b>low</b></li> </ul>



Table 416: Components of the Hierarchical Port Scheduling (ETS) Configuration Topology (*continued*)

Property	Settings
PFC	<p>Congestion notification profile name—<b>gd-cnp</b></p> <p>PFC enabled on code points: <b>011</b> (<b>fcoe</b> priority), <b>010</b> (<b>no-loss</b> priority)</p>
Drop profiles	<p><b>dp-be-low</b>: drop start point <b>25</b>, drop end point <b>50</b>, maximum drop rate <b>80</b></p> <p><b>dp-be-high</b>: drop start point <b>10</b>, drop end point <b>40</b>, maximum drop rate <b>100</b></p> <p><b>dp-hpc</b>: drop start point <b>75</b>, drop end point <b>90</b>, maximum drop rate <b>75</b></p> <p><b>dp-nc</b>: drop start point <b>80</b>, drop end point <b>100</b>, maximum drop rate <b>100</b></p>
Queue schedulers	<p><b>be-sched</b>: minimum bandwidth <b>3g</b>, maximum bandwidth <b>100%</b>, priority <b>low</b>, drop profiles <b>dp-be-low</b> and <b>dp-be-high</b></p> <p><b>fcoe-sched</b>: minimum bandwidth <b>2.5g</b>, maximum bandwidth <b>100%</b>, priority <b>low</b></p> <p><b>hpc-sched</b>: minimum bandwidth <b>2g</b>, maximum bandwidth <b>100%</b>, priority <b>low</b>, drop profile <b>dp-hpc</b></p> <p><b>nc-sched</b>: minimum bandwidth <b>500m</b>, maximum bandwidth <b>100%</b>, priority <b>low</b>, drop profile <b>dp-nc</b></p> <p><b>nl-sched</b>: minimum bandwidth <b>2g</b>, maximum bandwidth <b>100%</b>, priority <b>low</b></p>
Forwarding class-to-scheduler mapping	<p>Scheduler map <b>be-map</b>:</p> <p>Forwarding class <b>best-effort</b>, scheduler <b>be-sched</b></p> <p>Forwarding class <b>be</b>, scheduler <b>be-sched</b></p> <p>Forwarding class <b>network-control</b>, scheduler <b>nc-sched</b></p> <p>Scheduler map <b>gd-map</b>:</p> <p>Forwarding class <b>fcoe</b>, scheduler <b>fcoe-sched</b></p> <p>Forwarding class <b>no-loss</b>, scheduler <b>nl-sched</b></p> <p>Scheduler map <b>hpc-map</b>:</p> <p>Forwarding class <b>hpc</b>, scheduler <b>hpc-sched</b></p>
Traffic control profiles	<p><b>be-tcp</b>: scheduler map <b>be-map</b>, minimum bandwidth <b>3.5g</b>, maximum bandwidth <b>100%</b></p> <p><b>gd-tcp</b>: scheduler map <b>gd-map</b>, minimum bandwidth <b>4.5g</b>, maximum bandwidth <b>100%</b></p> <p><b>hpc-tcp</b>: scheduler map <b>hpc-map</b>, minimum bandwidth <b>2g</b>, maximum bandwidth <b>100%</b></p>
Interfaces	<p>This example configures hierarchical port scheduling on interfaces <b>xe-0/0/20</b> and <b>xe-0/0/21</b>. Because traffic is bidirectional, you apply the ingress and egress configuration components to both interfaces:</p> <ul style="list-style-type: none"> <li>• Classifier Name—<b>hsclassifier1</b></li> <li>• Forwarding class sets—<b>best-effort-pg</b>, <b>guar-deliver-pg</b>, <b>hpc-pg</b></li> <li>• Congestion notification profile—<b>gd-cnp</b></li> </ul>



Figure 185 on page 4966 shows a block diagram of the configuration components and the configuration flow of the CLI statements used in the example. You can perform the configuration steps in a different sequence if you want.

**Figure 185: Hierarchical Port Scheduling Components Block Diagram**


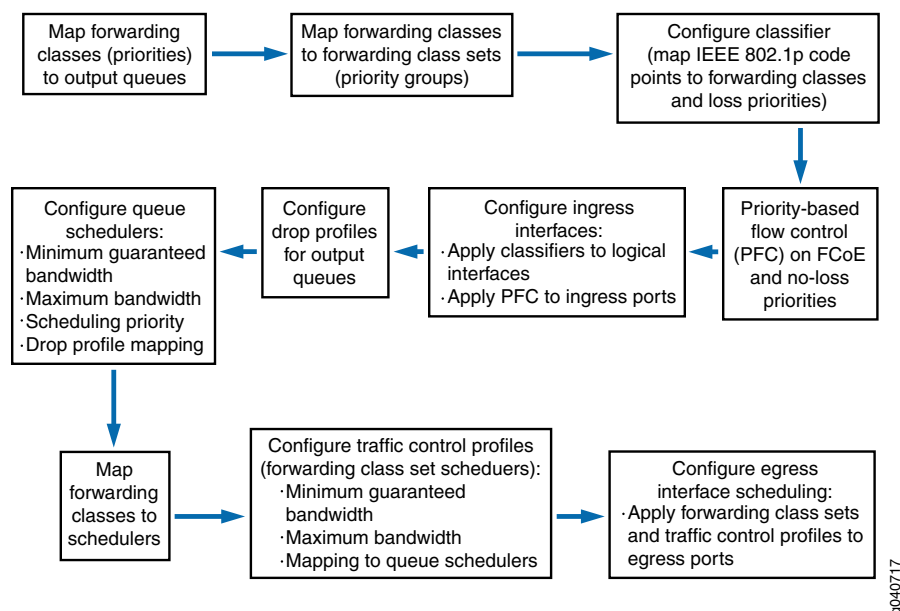


Figure 186 on page 4966 shows a block diagram of the hierarchical scheduling packet flow from ingress to egress.

**Figure 186: Hierarchical Port Scheduling Packet Flow Block Diagram**

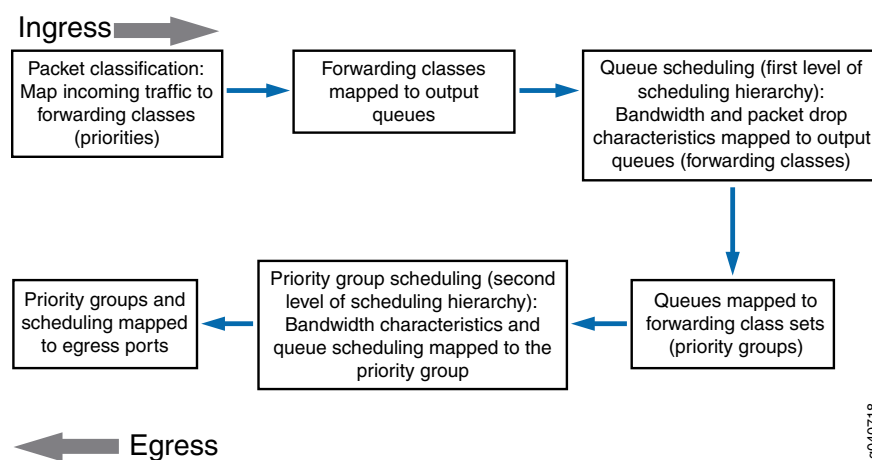

### Configuration

#### CLI Quick Configuration

To quickly configure hierarchical port scheduling, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network



configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level:

```
[edit class-of-service]
set forwarding-classes class best-effort queue-num 0
set forwarding-classes class be2 queue-num 1
set forwarding-classes class hpc queue-num 5
set forwarding-classes class network-control queue-num 7
set forwarding-class-sets best-effort-pg class best-effort
set forwarding-class-sets best-effort-pg class be2
set forwarding-class-sets best-effort-pg class network-control
set forwarding-class-sets guar-delivery-pg class fcoe
set forwarding-class-sets guar-delivery-pg class no-loss
set forwarding-class-sets hpc-pg class hpc
set classifiers ieee-802.1 hsclassifier1 forwarding-class best-effort loss-priority low code-points 000
set classifiers ieee-802.1 hsclassifier1 forwarding-class be2 loss-priority high code-points 001
set classifiers ieee-802.1 hsclassifier1 forwarding-class fcoe loss-priority low code-points 011
set classifiers ieee-802.1 hsclassifier1 forwarding-class no-loss loss-priority low code-points 100
set classifiers ieee-802.1 hsclassifier1 forwarding-class hpc loss-priority low code-points 101
set classifiers ieee-802.1 hsclassifier1 forwarding-class network-control loss-priority low code-points 110
set congestion-notification-profile gd-cnp input ieee-802.1 code-point 011 pfc
set congestion-notification-profile gd-cnp input ieee-802.1 code-point 100 pfc
set interfaces xe-0/0/20 unit 0 classifiers ieee-802.1 hsclassifier1
set interfaces xe-0/0/21 unit 0 classifiers ieee-802.1 hsclassifier1
set interfaces xe-0/0/20 congestion-notification-profile gd-cnp
set interfaces xe-0/0/21 congestion-notification-profile gd-cnp
set drop-profiles dp-be-low interpolate fill-level 25 fill-level 50 drop-probability 0 drop-probability 80
set drop-profiles dp-be-high interpolate fill-level 10 fill-level 40 drop-probability 0 drop-probability 100
set drop-profiles dp-nc interpolate fill-level 80 fill-level 100 drop-probability 0 drop-probability 100
set drop-profiles dp-hpc interpolate fill-level 75 fill-level 90 drop-probability 0 drop-probability 75
set schedulers be-sched priority low transmit-rate 3g
set schedulers be-sched shaping-rate percent 100
set schedulers be-sched drop-profile-map loss-priority low protocol any drop-profile dp-be-low
set schedulers be-sched drop-profile-map loss-priority high protocol any drop-profile dp-be-high
set schedulers fcoe-sched priority low transmit-rate 2500m
set schedulers fcoe-sched shaping-rate percent 100
set schedulers hpc-sched priority low transmit-rate 2g
set schedulers hpc-sched shaping-rate percent 100
set schedulers hpc-sched drop-profile-map loss-priority low protocol any drop-profile dp-hpc
set schedulers nc-sched priority low transmit-rate 500m
set schedulers nc-sched shaping-rate percent 100
set schedulers nc-sched drop-profile-map loss-priority low protocol any drop-profile dp-nc
set schedulers nl-sched priority low transmit-rate 2g
set schedulers nl-sched shaping-rate percent 100
set scheduler-maps be-map forwarding-class best-effort scheduler be-sched
set scheduler-maps be-map forwarding-class be2 scheduler be-sched
set scheduler-maps be-map forwarding-class network-control scheduler nc-sched
set scheduler-maps gd-map forwarding-class fcoe scheduler fcoe-sched
set scheduler-maps gd-map forwarding-class no-loss scheduler nl-sched
set scheduler-maps hpc-map forwarding-class hpc scheduler hpc-sched
set traffic-control-profiles be-tcp scheduler-map be-map guaranteed-rate 3500m
set traffic-control-profiles be-tcp shaping-rate percent 100
set traffic-control-profiles gd-tcp scheduler-map gd-map guaranteed-rate 4500m
set traffic-control-profiles gd-tcp shaping-rate percent 100
```



```

set traffic-control-profiles hpc-tcp scheduler-map hpc-map guaranteed-rate 2g
set traffic-control-profiles hpc-tcp shaping-rate percent 100
set interfaces xe-0/0/20 forwarding-class-set best-effort-pg output-traffic-control-profile be-tcp
set interfaces xe-0/0/20 forwarding-class-set guar-delivery-pg output-traffic-control-profile
gd-tcp
set interfaces xe-0/0/20 forwarding-class-set hpc-pg output-traffic-control-profile hpc-tcp
set interfaces xe-0/0/21 forwarding-class-set best-effort-pg output-traffic-control-profile be-tcp
set interfaces xe-0/0/21 forwarding-class-set guar-delivery-pg output-traffic-control-profile
gd-tcp
set interfaces xe-0/0/21 forwarding-class-set hpc-pg output-traffic-control-profile hpc-tcp

```

### Step-by-Step Procedure

To perform a step-by-step configuration of the forwarding classes (priorities), forwarding class sets (priority groups), classifiers, queue schedulers, PFC, traffic control profiles, and interfaces to set up hierarchical port scheduling (ETS):

1. Configure the forwarding classes (priorities) and map them to unicast output queues (do not explicitly map the **fcoe** and **no-loss** forwarding classes to output queues; use the default configuration):

```

[edit class-of-service]
user@switch# set forwarding-classes class best-effort queue-num 0
user@switch# set forwarding-classes class be2 queue-num 1
user@switch# set forwarding-classes class hpc queue-num 5
user@switch# set forwarding-classes class network-control queue-num 7

```

2. Configure forwarding class sets (priority groups) to group forwarding classes (priorities) that require similar CoS treatment:

```

[edit class-of-service]
user@switch# set forwarding-class-sets best-effort-pg class best-effort
user@switch# set forwarding-class-sets best-effort-pg class be2
user@switch# set forwarding-class-sets best-effort-pg class network-control
user@switch# set forwarding-class-sets guar-delivery-pg class fcoe
user@switch# set forwarding-class-sets guar-delivery-pg class no-loss
user@switch# set forwarding-class-sets hpc-pg class hpc

```

3. Configure a classifier to set the loss priority and IEEE 802.1 code points assigned to each forwarding class at the ingress:

```

[edit class-of-service]
user@switch# set classifiers ieee-802.1 hsclassifier1 forwarding-class best-effort
loss-priority low code-points 000
user@switch# set classifiers ieee-802.1 hsclassifier1 forwarding-class be2 loss-priority
high code-points 001
user@switch# set classifiers ieee-802.1 hsclassifier1 forwarding-class fcoe loss-priority
low code-points 011
user@switch# set classifiers ieee-802.1 hsclassifier1 forwarding-class no-loss loss-priority
low code-points 100
user@switch# set classifiers ieee-802.1 hsclassifier1 forwarding-class hpc loss-priority low
code-points 101
user@switch# set classifiers ieee-802.1 hsclassifier1 forwarding-class network-control
loss-priority low code-points 110

```

4. Configure a congestion notification profile to enable PFC on the FCoE and no-loss queue IEEE 802.1 code points:

```

[edit class-of-service]
user@switch# set congestion-notification-profile gd-cnp input ieee-802.1 code-point 011
pfc
user@switch# set congestion-notification-profile gd-cnp input ieee-802.1 code-point 100
pfc

```



5. Assign the classifier to the interfaces:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/20 unit 0 classifiers ieee-802.1 hsclassifier1
user@switch# set interfaces xe-0/0/21 unit 0 classifiers ieee-802.1 hsclassifier1
```

6. Apply the PFC configuration to the interfaces:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/20 congestion-notification-profile gd-cnp
user@switch# set interfaces xe-0/0/21 congestion-notification-profile gd-cnp
```

7. Configure the drop profile for the best-effort low loss-priority queue:

```
[edit class-of-service]
user@switch# set drop-profiles dp-be-low interpolate fill-level 25 fill-level 50
drop-probability 0 drop-probability 80
```

8. Configure the drop profile for the best-effort high loss-priority queue:

```
[edit class-of-service]
user@switch# set drop-profiles dp-be-high interpolate fill-level 10 fill-level 40
drop-probability 0 drop-probability 100
```

9. Configure the drop profile for the network-control queue:

```
[edit class-of-service]
user@switch# set drop-profiles dp-nc interpolate fill-level 80 fill-level 100 drop-probability
0 drop-probability 100
```

10. Configure the drop profile for the high-performance computing queue:

```
[edit class-of-service]
user@switch# set drop-profiles dp-hpc interpolate fill-level 75 fill-level 90 drop-probability
0 drop-probability 75
```

11. Define the minimum guaranteed bandwidth, priority, maximum bandwidth, and drop profiles for the best-effort queue:

```
[edit class-of-service]
user@switch# set schedulers be-sched priority low transmit-rate 3g
user@switch# set schedulers be-sched shaping-rate percent 100
user@switch# set schedulers be-sched drop-profile-map loss-priority low protocol any
drop-profile dp-be-low
user@switch# set schedulers be-sched drop-profile-map loss-priority high protocol any
drop-profile dp-be-high
```

12. Define the minimum guaranteed bandwidth, priority, and maximum bandwidth for the FCoE queue:

```
[edit class-of-service]
user@switch# set schedulers fcoe-sched priority low transmit-rate 2500m
user@switch# set schedulers fcoe-sched shaping-rate percent 100
```

13. Define the minimum guaranteed bandwidth, priority, maximum bandwidth, and drop profile for the high-performance computing queue:

```
[edit class-of-service]
user@switch# set schedulers hpc-sched priority low transmit-rate 2g
user@switch# set schedulers hpc-sched shaping-rate percent 100
user@switch# set schedulers hpc-sched drop-profile-map loss-priority low protocol any
drop-profile dp-hpc
```



14. Define the minimum guaranteed bandwidth, priority, maximum bandwidth, and drop profile for the network-control queue:  

```
[edit class-of-service]
user@switch# set schedulers nc-sched priority low transmit-rate 500m
user@switch# set schedulers nc-sched shaping-rate percent 100
user@switch# set schedulers nc-sched drop-profile-map loss-priority low protocol any
drop-profile dp-nc
```
15. Define the minimum guaranteed bandwidth, priority, and maximum bandwidth for the no-loss queue:  

```
[edit class-of-service]
user@switch# set schedulers nl-sched priority low transmit-rate 2g
user@switch# set schedulers nl-sched shaping-rate percent 100
```
16. Map the schedulers to the appropriate forwarding classes (queues):  

```
[edit class-of-service]
user@switch# set scheduler-maps be-map forwarding-class best-effort scheduler be-sched
user@switch# set scheduler-maps be-map forwarding-class be2 scheduler be-sched
user@switch# set scheduler-maps be-map forwarding-class network-control scheduler
nc-sched
user@switch# set scheduler-maps gd-map forwarding-class fcoe scheduler fcoe-sched
user@switch# set scheduler-maps gd-map forwarding-class no-loss scheduler nl-sched
user@switch# set scheduler-maps hpc-map forwarding-class hpc scheduler hpc-sched
```
17. Define the traffic control profile for the best-effort priority group (queue scheduler to mapping, minimum guaranteed bandwidth, and maximum bandwidth):  

```
[edit class-of-service]
user@switch# set traffic-control-profiles be-tcp scheduler-map be-map guaranteed-rate
3500m
user@switch# set traffic-control-profiles be-tcp shaping-rate percent 100
```
18. Define the traffic control profile for the guaranteed delivery priority group (queue to scheduler mapping, minimum guaranteed bandwidth, and maximum bandwidth):  

```
[edit class-of-service]
user@switch# set traffic-control-profiles gd-tcp scheduler-map gd-map guaranteed-rate
4500m
user@switch# set traffic-control-profiles gd-tcp shaping-rate percent 100
```
19. Define the traffic control profile for the high-performance computing priority group (queue to scheduler mapping, minimum guaranteed bandwidth, and maximum bandwidth):  

```
[edit class-of-service]
user@switch# set traffic-control-profiles hpc-tcp scheduler-map hpc-map guaranteed-rate
2g
user@switch# set traffic-control-profiles hpc-tcp shaping-rate percent 100
```
20. Apply the three priority groups (forwarding class sets) and the appropriate traffic control profiles to the egress ports:  

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/20 forwarding-class-set best-effort-pg
output-traffic-control-profile be-tcp
user@switch# set interfaces xe-0/0/20 forwarding-class-set guar-delivery-pg
output-traffic-control-profile gd-tcp
user@switch# set interfaces xe-0/0/20 forwarding-class-set hpc-pg
output-traffic-control-profile hpc-tcp
```



```

user@switch# set interfaces xe-0/0/21 forwarding-class-set best-effort-pg
output-traffic-control-profile be-tcp
user@switch# set interfaces xe-0/0/21 forwarding-class-set guar-delivery-pg
output-traffic-control-profile gd-tcp
user@switch# set interfaces xe-0/0/21 forwarding-class-set hpc-pg
output-traffic-control-profile hpc-tcp

```

### Results

Display the results of the configuration (the system shows only the explicitly configured parameters; it does not show default parameters such as the **fcoe** and **no-loss** lossless forwarding classes):

```

user@switch> show configuration class-of-service
classifiers {
  ieee-802.1 hsclassifier1 {
    forwarding-class best-effort {
      loss-priority low code-points 000;
    }
    forwarding-class be2 {
      loss-priority high code-points 001;
    }
    forwarding-class fcoe {
      loss-priority low code-points 011;
    }
    forwarding-class no-loss {
      loss-priority low code-points 100;
    }
    forwarding-class hpc {
      loss-priority low code-points 101;
    }
    forwarding-class network-control {
      loss-priority low code-points 110;
    }
  }
}
drop-profiles {
  dp-be-low {
    interpolate {
      fill-level [ 25 50 ];
      drop-probability [ 0 80 ];
    }
  }
  dp-be-high {
    interpolate {
      fill-level [ 10 40 ];
      drop-probability [ 0 100 ];
    }
  }
  dp-hpc {
    interpolate {
      fill-level [ 75 90 ];
      drop-probability [ 0 75 ];
    }
  }
  dp-nc {
    interpolate {

```



```
        fill-level [ 80 100 ];
        drop-probability [ 0 100 ];
    }
}
forwarding-classes {
    class best-effort queue-num 0;
    class be2 queue-num 1;
    class hpc queue-num 5;
    class network-control queue-num 7;
}
traffic-control-profiles {
    be-tcp {
        scheduler-map be-map;
        shaping-rate percent 100;
        guaranteed-rate 3500000000;
    }
    gd-tcp {
        scheduler-map gd-map;
        shaping-rate percent 100;
        guaranteed-rate 4500000000;
    }
    hpc-tcp {
        scheduler-map hpc-map;
        shaping-rate percent 100;
        guaranteed-rate 2g;
    }
}
forwarding-class-sets {
    guar-delivery-pg {
        class fcoe;
        class no-loss;
    }
    best-effort-pg {
        class best-effort;
        class be2;
        class network-control;
    }
    hpc-pg {
        class hpc;
    }
}
congestion-notification-profile {
    gd-cnp {
        input {
            ieee-802.1 {
                code-point 011 {
                    pfc;
                }
                code-point 100 {
                    pfc;
                }
            }
        }
    }
}
```



```

interfaces {
  xe-0/0/20 {
    forwarding-class-set {
      best-effort-pg {
        output-traffic-control-profile be-tcp;
      }
      guar-delivery-pg {
        output-traffic-control-profile gd-tcp;
      }
      hpc-pg {
        output-traffic-control-profile hpc-tcp;
      }
    }
    congestion-notification-profile gd-cnp;
    unit 0 {
      classifiers {
        ieee-802.1 hsclassifier1;
      }
    }
  }
  xe-0/0/21 {
    forwarding-class-set {
      best-effort-pg {
        output-traffic-control-profile be-tcp;
      }
      guar-delivery-pg {
        output-traffic-control-profile gd-tcp;
      }
      hpc-pg {
        output-traffic-control-profile hpc-tcp;
      }
    }
    congestion-notification-profile gd-cnp;
    unit 0 {
      classifiers {
        ieee-802.1 hsclassifier1;
      }
    }
  }
}
scheduler-maps {
  be-map {
    forwarding-class best-effort scheduler be-sched;
    forwarding-class network-control scheduler nc-sched;
    forwarding-class be2 scheduler be-sched;
  }
  gd-map {
    forwarding-class fcoe scheduler fcoe-sched;
    forwarding-class no-loss scheduler nl-sched;
  }
  hpc-map {
    forwarding-class hpc scheduler hpc-sched;
  }
}
schedulers {
  be-sched {

```



```
    transmit-rate 3g;
    shaping-rate percent 100;
    priority low;
    drop-profile-map loss-priority low protocol any drop-profile dp-be-low;
    drop-profile-map loss-priority high protocol any drop-profile dp-be-high;
  }
  fcoe-sched {
    transmit-rate 2500000000;
    shaping-rate percent 100;
    priority low;
  }
  hpc-sched {
    transmit-rate 2g;
    shaping-rate percent 100;
    priority low;
    drop-profile-map loss-priority low protocol any drop-profile dp-hpc;
  }
  nc-sched {
    transmit-rate 500m;
    shaping-rate percent 100;
    priority low;
    drop-profile-map loss-priority low protocol any drop-profile dp-nc;
  }
  nl-sched {
    transmit-rate 2g;
    shaping-rate percent 100;
    priority low;
  }
}
```



**TIP:** To quickly configure the interfaces, issue the `load merge terminal` command, and then copy the hierarchy and paste it into the switch terminal window.

---

## Verification

To verify that the hierarchical port scheduling components have been created and are operating properly, perform these tasks:

- [Verifying That the Forwarding Classes \(Priorities\) Have Been Created on page 4975](#)
- [Verifying That the Forwarding Class Sets \(Priority Groups\) Have Been Created on page 4975](#)
- [Verifying That the Classifier Has Been Created on page 4976](#)
- [Verifying That Priority-Based Flow Control Has Been Enabled on page 4976](#)
- [Verifying That the Output Queue Schedulers Have Been Created on page 4977](#)
- [Verifying That the Drop Profiles Have Been Created on page 4980](#)



- [Verifying That the Priority Group Output Schedulers \(Traffic Control Profiles\) Have Been Created on page 4981](#)
- [Verifying the Interface Configuration on page 4982](#)

### *Verifying That the Forwarding Classes (Priorities) Have Been Created*

**Purpose** Verify that the forwarding classes have been created and mapped to the correct queues. (The system shows only the explicitly configured forwarding classes. It does not show default forwarding classes such as **fcoe** and **no-loss**.)

**Action** List the forwarding classes using the operational mode command **show class-of-service forwarding-class**:

```
user@switch> show class-of-service forwarding-class
```

Forwarding class	ID	Queue	Policing priority	No-Loss
best-effort	0	0	normal	Disabled
be2	1	3	normal	Disabled
hpc	2	4	normal	Disabled
network-control	3	7	normal	Disabled
mcast	8	8	normal	Disabled

**Meaning** The **show class-of-service forwarding-class** command lists all of the configured forwarding classes, the internal identification number of each forwarding class, the queues that are mapped to the forwarding classes, the policing priority, and whether the forwarding class is lossless (no-loss packet drop attribute enabled) or lossy forwarding class (no-loss packet drop attribute disabled). The command output shows that:

- Forwarding class **best-effort** maps to queue **0** and is lossy
- Forwarding class **be2** maps to queue **1** and is lossy
- Forwarding class **hpc** maps to queue **5** and is lossy
- Forwarding class **network-control** maps to queue **7** and is lossy

In addition, the command lists the default multicast (multidestination) forwarding class and the default queue to which it is mapped.

### *Verifying That the Forwarding Class Sets (Priority Groups) Have Been Created*

**Purpose** Verify that the priority groups have been created and that the correct priorities (forwarding classes) belong to the appropriate priority group.

**Action** List the forwarding class sets using the operational mode command **show class-of-service forwarding-class-set**:

```
user@switch> show class-of-service forwarding-class-set
```

```
Forwarding class set: best-effort-pg, Type: normal-type, Forwarding class set
index: 19907
```

Forwarding class	Index
best-effort	0



be2	1
network-control	5

Forwarding class set: guar-delivery-pg, Type: normal-type, Forwarding class set index: 43700

Forwarding class	Index
fcoe	2
no-loss	3

Forwarding class set: hpc-pg, Type: normal-type, Forwarding class set index: 60758

Forwarding class	Index
hpc	4

**Meaning** The **show class-of-service forwarding-class-set** command lists all of the configured forwarding class sets (priority groups), the forwarding classes (priorities) that belong to each priority group, and the internal index number of each priority group. The command output shows that:

- The forwarding class set **best-effort-pg** includes the forwarding classes **best-effort**, **be2**, and **network-control**.
- The forwarding class set **guar-delivery-pg** includes the forwarding classes **fcoe** and **no-loss**.
- The forwarding class set **hpc-pg** includes the forwarding class **hpc**.

#### *Verifying That the Classifier Has Been Created*

**Purpose** Verify that the classifier maps forwarding classes to the correct IEEE 802.1p code points and packet loss priorities.

**Action** List the classifier configured for hierarchical port scheduling using the operational mode command **show class-of-service classifier name hsclassifier1**:

```
user@switch> show class-of-service classifier name hsclassifier1
Classifier: hsclassifier1, Code point type: ieee-802.1p, Index: 43607
Code point      Forwarding class      Loss priority
000             best-effort            low
001             be2                   high
011             fcoe                  low
100             no-loss               low
101             hpc                   low
110             network-control       low
```

**Meaning** The **show class-of-service classifier name hsclassifier1** command lists all of the IEEE 802.1p code points and the loss priorities mapped to all of the forwarding classes in the classifier. The command output shows that the forwarding classes **best-effort**, **be2**, **no-loss**, **fcoe**, **hpc**, and **network-control** have been created and mapped to IEEE 802.1p code points and loss priorities.

#### *Verifying That Priority-Based Flow Control Has Been Enabled*

**Purpose** Verify that PFC is enabled on the correct priorities for lossless transport.



**Action** List the congestion notification profiles using the operational mode command **show class-of-service congestion-notification**:

```
user@switch> show class-of-service congestion-notification
```

```
Type: Input, Name: gd-cnp, Index: 51687
```

```
Cable Length: 100 m
```

Priority	PFC	MRU
000	Disabled	
001	Disabled	
010	Disabled	
011	Enabled	2500
100	Enabled	2500
101	Disabled	
110	Disabled	
111	Disabled	

```
Type: Output
```

Priority	Flow-Control-Queues
000	0
001	0
010	1
011	2
100	3
101	4
110	5
111	6
	7

**Meaning** The **show class-of-service congestion-notification** command lists all of the congestion notification profiles and the IEEE 802.1p code points with PFC enabled. The command output shows that PFC is enabled for code points **011** (**fcoe** priority and queue) and **100** (**no-loss** priority and queue) for the **gd-cnp** congestion notification profile.

The command also shows the default cable length (100 meters), the default maximum receive unit (2500 bytes), and the default mapping of priorities to output queues because this example does not include configuring these options.

#### *Verifying That the Output Queue Schedulers Have Been Created*

**Purpose** Verify that the output queue schedulers have been created with the correct bandwidth parameters and priorities, mapped to the correct queues, and mapped to the correct drop profiles.

**Action** List the scheduler maps using the operational mode command **show class-of-service scheduler-map**:

```
user@switch> show class-of-service scheduler-map
```

```
Scheduler map: be-map, Index: 64023
```

```
Scheduler: be-sched, Forwarding class: best-effort, Index: 13005
Transmit rate: 3000000000 bps, Rate Limit: none, Buffer size: remainder,
```



Buffer Limit: none, Priority: low  
 Excess Priority: unspecified  
 Shaping rate: 100 percent,  
 drop-profile-map-set-type: mark  
 Drop profiles:

Loss priority	Protocol	Index	Name
Low	any	55387	dp-be-low
Medium high	any	1	<default-drop-profile>
High	any	4369	dp-be-high

Scheduler: be-sched, Forwarding class: be2, Index: 13005  
 Transmit rate: 3000000000 bps, Rate Limit: none, Buffer size: remainder,  
 Buffer Limit: none, Priority: low  
 Excess Priority: unspecified  
 Shaping rate: 100 percent,  
 drop-profile-map-set-type: mark  
 Drop profiles:

Loss priority	Protocol	Index	Name
Low	any	55387	dp-be-low
Medium high	any	1	<default-drop-profile>
High	any	4369	dp-be-high

Scheduler: nc-sched, Forwarding class: network-control, Index: 45740  
 Transmit rate: 5000000000 bps, Rate Limit: none, Buffer size: remainder,  
 Buffer Limit: none, Priority: low  
 Excess Priority: unspecified  
 Shaping rate: 100 percent,  
 drop-profile-map-set-type: mark  
 Drop profiles:

Loss priority	Protocol	Index	Name
Low	any	44207	dp-nc
Medium high	any	1	<default-drop-profile>
High	any	1	<default-drop-profile>

Scheduler map: gd-map, Index: 61447

Scheduler: fcoe-sched, Forwarding class: fcoe, Index: 37289  
 Transmit rate: 25000000000 bps, Rate Limit: none, Buffer size: remainder,  
 Buffer Limit: none, Priority: low  
 Excess Priority: unspecified  
 Shaping rate: 100 percent,  
 drop-profile-map-set-type: mark  
 Drop profiles:

Loss priority	Protocol	Index	Name
Low	any	44207	<default-drop-profile>
Medium high	any	1	<default-drop-profile>
High	any	1	<default-drop-profile>

Scheduler: nl-sched, Forwarding class: no-loss, Index: 29359  
 Transmit rate: 20000000000 bps, Rate Limit: none, Buffer size: remainder,  
 Buffer Limit: none, Priority: low  
 Excess Priority: unspecified  
 Shaping rate: 100 percent,  
 drop-profile-map-set-type: mark  
 Drop profiles:

Loss priority	Protocol	Index	Name
Low	any	44207	<default-drop-profile>
Medium high	any	1	<default-drop-profile>
High	any	1	<default-drop-profile>

Scheduler map: hpc-map, Index: 56941



```
Scheduler: hpc-sched, Forwarding class: hpc, Index: 55900
Transmit rate: 2000000000 bps, Rate Limit: none, Buffer size: remainder,
Buffer Limit: none, Priority: low
Excess Priority: unspecified
Shaping rate: 100 percent,
drop-profile-map-set-type: mark
Drop profiles:
  Loss priority  Protocol  Index  Name
  Low           any       57716  dp-hpc
  Medium high   any       1      <default-drop-profile>
  High          any       1      <default-drop-profile>
```

**Meaning** The **show class-of-service scheduler-map** command lists all of the configured scheduler maps. For each scheduler map, the command output includes:

- The name of the scheduler map (**scheduler-map** field)
- The name of the scheduler (**scheduler** field)
- The forwarding classes mapped to the scheduler (**forwarding-class** field)
- The minimum guaranteed queue bandwidth (**transmit-rate** field)
- The scheduling priority (**priority** field)
- The maximum bandwidth in the priority group the queue can consume (**shaping-rate** field)
- The drop profile loss priority (**loss priority** field) for each drop profile name (**name** field)

The command output shows that:

- The scheduler map **be-map** has been created and has these properties:
  - There are two schedulers, **be-sched** and **nc-sched**.
  - The scheduler **be-sched** has two forwarding classes, **best-effort** and **be2**.
  - Scheduler **be-sched** forwarding classes **best-effort** and **be2** share a minimum guaranteed bandwidth of **3000000000 bps**, can consume a maximum of **100 percent** of the priority group bandwidth, and use the drop profile **dp-be-low** for low loss-priority traffic, the default drop profile for medium-high loss-priority traffic, and the drop profile **dp-be-high** for high loss-priority traffic.
  - The scheduler **nc-sched** has one forwarding class, **network-control**.
  - The **network-control** forwarding class has a minimum guaranteed bandwidth of **5000000000 bps**, can consume a maximum of **100 percent** of the priority group bandwidth, and uses the drop profile **dp-nc** for low loss-priority traffic and the default drop profile for medium-high and high loss priority traffic.
- The scheduler map **gd-map** has been created and has these properties:
  - There are two schedulers, **fcoe-sched** and **nl-sched**.
  - The scheduler **fcoe-sched** has one forwarding class, **fcoe**.



- The **fcoe** forwarding class has a minimum guaranteed bandwidth of **2500000000 bps**, and can consume a maximum of **100 percent** of the priority group bandwidth.
- The scheduler **nl-sched** has one forwarding class, **no-loss**.
- The **no-loss** forwarding class has a minimum guaranteed bandwidth of **2000000000 bps**, and can consume a maximum of **100 percent** of the priority group bandwidth.
- The scheduler map **hpc-map** has been created and has these properties:
  - There is one scheduler, **hpc-sched**.
  - The scheduler **hpc-sched** has one forwarding class, **hpc**.
  - The **hpc** forwarding class has a minimum guaranteed bandwidth of **2000000000 bps**, can consume a maximum of **100 percent** of the priority group bandwidth, and uses the drop profile **dp-hpc** for low loss-priority traffic and the default drop profile for medium-high and high loss-priority traffic.

#### *Verifying That the Drop Profiles Have Been Created*

**Purpose** Verify that the drop profiles **dp-be-high**, **dp-be-low**, **dp-hpc**, and **dp-nc** have been created with the correct fill levels and drop probabilities.

**Action** List the drop profiles using the operational mode command **show configuration class-of-service drop-profiles**:

```
user@switch> show configuration class-of-service drop-profiles
dp-be-low {
    interpolate {
        fill-level [ 25 50 ];
        drop-probability [ 0 80 ];
    }
}
dp-be-high {
    interpolate {
        fill-level [ 10 40 ];
        drop-probability [ 0 100 ];
    }
}
dp-hpc {
    interpolate {
        fill-level [ 75 90 ];
        drop-probability [ 0 75 ];
    }
}
dp-nc {
    interpolate {
        fill-level [ 80 100 ];
        drop-probability [ 0 100 ];
    }
}
```

**Meaning** The **show configuration class-of-service drop-profiles** command lists the drop profiles and their properties. The command output shows that there are four drop profiles configured, **dp-be-high**, **dp-be-low**, **dp-hpc**, and **dp-nc**. The output also shows that:



- For **dp-be-low**, the drop start point (the first fill level) is when the queue is 25 percent filled, the drop end point (the second fill level) occurs when the queue is 50 percent filled, and the drop probability at the drop end point is 80 percent.
- For **dp-be-high**, the drop start point (the first fill level) is when the queue is 10 percent filled, the drop end point (the second fill level) occurs when the queue is 40 percent filled, and the drop probability at the drop end point is 100 percent.
- For **dp-hpc**, the drop start point (the first fill level) is when the queue is 75 percent filled, the drop end point (the second fill level) occurs when the queue is 90 percent filled, and the drop probability at the drop end point is 75 percent.
- For **dp-nc**, the drop start point (the first fill level) is when the queue is 80 percent filled, the drop end point (the second fill level) occurs when the queue is 100 percent filled, and the drop probability at the drop end point is 100 percent.

***Verifying That the Priority Group Output Schedulers (Traffic Control Profiles) Have Been Created***

**Purpose** Verify that the traffic control profiles **be-tcp**, **gd-tcp**, and **hpc-tcp** have been created with the correct bandwidth parameters and scheduler mapping.

**Action** List the traffic control profiles using the operational mode command **show class-of-service traffic-control-profile**:

```
user@switch> show class-of-service traffic-control-profile
Traffic control profile: be-tcp, Index: 40535
  Shaping rate: 100 percent
  Scheduler map: be-map
  Guaranteed rate: 3500000000

Traffic control profile: gd-tcp, Index: 37959
  Shaping rate: 100 percent
  Scheduler map: gd-map
  Guaranteed rate: 4500000000

Traffic control profile: hpc-tcp, Index: 47661
  Shaping rate: 100 percent
  Scheduler map: hpc-map
  Guaranteed rate: 2000000000
```

**Meaning** The **show class-of-service traffic-control-profile** command lists all of the configured traffic control profiles. For each traffic control profile, the command output includes:

- The name of the traffic control profile (**traffic-control-profile**)
- The maximum port bandwidth the priority group can consume (**shaping-rate**)
- The scheduler map associated with the traffic control profile (**scheduler-map**)
- The minimum guaranteed priority group port bandwidth (**guaranteed-rate**)

The command output shows that:



- The traffic control profile **be-tcp** can consume a maximum of **100 percent** of the port bandwidth, is associated with the scheduler map **be-map**, and has a minimum guaranteed bandwidth of **3500000000 bps**.
- The traffic control profile **gd-tcp** can consume a maximum of **100 percent** of the port bandwidth, is associated with the scheduler map **gd-map**, and has a minimum guaranteed bandwidth of **4500000000 bps**.
- The traffic control profile **hpc-tcp** can consume a maximum of **100 percent** of the port bandwidth, is associated with the scheduler map **hpc-map**, and has a minimum guaranteed bandwidth of **2000000000 bps**.

### *Verifying the Interface Configuration*

**Purpose** Verify that the classifier, the congestion notification profile, and the forwarding class sets are configured on interfaces **xe-0/0/20** and **xe-0/0/21**.

**Action** List the interfaces using the operational mode commands **show configuration class-of-service interfaces xe-0/0/20** and **show configuration class-of-service interfaces xe-0/0/21**:

```
user@switch> show configuration class-of-service interfaces xe-0/0/20
forwarding-class-set {
    best-effort-gp {
        output-traffic-control-profile be-tcp;
    }
    guar-delivery-pg {
        output-traffic-control-profile gd-tcp;
    }
    hpc-pg {
        output-traffic-control-profile hpc-tcp;
    }
}
congestion-notification-profile gd_cnp;
unit 0 {
    classifiers {
        ieee-802.1 hscclassifier1;
    }
}
```

```
user@switch> show configuration class-of-service interfaces xe-0/0/21
forwarding-class-set {
    best-effort-gp {
        output-traffic-control-profile be-tcp;
    }
    guar-delivery-pg {
        output-traffic-control-profile gd-tcp;
    }
    hpc-pg {
        output-traffic-control-profile hpc-tcp;
    }
}
congestion-notification-profile gd_cnp;
unit 0 {
    classifiers {
        ieee-802.1 hscclassifier1;
    }
}
```



```
    }
}
```

**Meaning** The **show configuration class-of-service interfaces** *interface-name* command shows that each interface includes the forwarding class sets **best-effort-pg**, **guar-delivery-pg**, and **hpc-pg**, congestion notification profile **gd-cnp**, and the IEEE 802.1p classifier **hsclassifier1**.

- Related Documentation**
- [Defining CoS Unicast BA Classifiers on page 5133](#)
  - [Benefits of Configuring CoS Hierarchical Port Scheduling](#)
  - [Assigning CoS Components to Interfaces on page 5157](#)
  - [Example: Configuring Tail-Drop Profiles on page 5019](#)
  - [Example: Configuring Drop Profile Maps on page 5022](#)
  - [Example: Configuring Forwarding Classes on page 5024](#)
  - [Example: Configuring Forwarding Class Sets on page 5027](#)
  - [Example: Configuring Queue Schedulers on page 5030](#)
  - [Example: Configuring Queue Scheduling Priority on page 5035](#)
  - [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)
  - [Example: Configuring Minimum Guaranteed Output Bandwidth on page 5040](#)
  - [Example: Configuring Maximum Output Bandwidth on page 5044](#)
  - [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
  - [Overview of CoS Changes Introduced in Junos OS Release 12.2 on page 4820](#)
  - [Understanding CoS Hierarchical Port Scheduling \(ETS\) on page 4872](#)
  - [Understanding CoS Scheduling Behavior and Configuration Considerations on page 4892](#)

## Example: Configuring CoS PFC for FCoE Traffic

Priority-based flow control (PFC, described in IEEE 802.1Qbb) is a link-level flow control mechanism that you apply at ingress interfaces. PFC enables you to divide traffic on one physical link into eight priorities. You can think of the eight priorities as eight “lanes” of traffic that correspond to queues (forwarding classes). Each priority is mapped to a 3-bit IEEE 802.1p CoS flag in the VLAN header.

You can selectively apply PFC to the traffic in any queue without pausing the traffic in other queues on the same link. You must apply PFC to FCoE traffic to ensure lossless transport.

To configure PFC on FCoE traffic, use the default FCoE forwarding-class-to-queue mapping and:

- Configure a classifier that associates the FCoE forwarding class with FCoE traffic.
- Configure a congestion notification profile to apply PFC to the FCoE traffic.



- Apply the classifier and the PFC configuration to ingress interfaces.
- Configure the bandwidth scheduling for the FCoE forwarding class output queue.
- Create a forwarding class set (priority group) that includes the FCoE forwarding class; this is required to configure enhanced transmission selection (ETS) and support data center bridging (DCB).
- Configure the bandwidth scheduling for the FCoE priority group.
- Apply the scheduling to the egress interfaces.



**NOTE:** If you are using Junos OS Release 12.2 or later, use the default forwarding classes for the lossless fcoe forwarding class. If you explicitly configure default lossless forwarding classes, the traffic mapped to those forwarding classes is treated as lossy (best-effort) traffic and does *not* receive lossless treatment.

In Junos OS Release 12.3 and later, you can include the *no-loss* packet drop attribute in explicit forwarding class configurations to configure a lossless forwarding class.

---

This example describes how to configure PFC for FCoE traffic:

- [Requirements on page 4984](#)
- [Overview on page 4984](#)
- [Configuration on page 4986](#)
- [Verification on page 4989](#)

### Requirements

---

This example uses the following hardware and software components:

- A Juniper Networks QFX3500 Switch
- Junos OS Release 11.1 or later for the QFX Series

### Overview

---

FCoE traffic requires PFC to ensure lossless packet transport. This example shows you how to:

- Assign FCoE traffic to the FCoE priority at the ingress.
- Create and apply CoS for the FCoE traffic using ETS (hierarchical port scheduling).
- Apply PFC to the FCoE traffic.
- Apply the configuration to ingress and egress interfaces.

Each interface in this example is configured as both an ingress interface and an egress interface, so the classifier, congestion notification profile, and port scheduling are applied to all of the interfaces.



**Topology**


Table 315 on page 4510 shows the configuration components for this example.

**Table 417: Components of the PFC for FCoE Traffic Configuration Topology**

Component	Settings
Hardware	QFX3500 switch
Behavior aggregate classifier (maps the FCoE forwarding class to incoming packets by IEEE 802.1 code point)	Code point <b>011</b> to forwarding class <b>fcoe</b> and loss priority <b>low</b> Ingress interfaces: <b>xe-0/0/31, xe-0/0/32, xe-0/0/33, xe-0/0/34</b>
PFC congestion notification profile	<b>fcoe-cnp:</b> Code point <b>011</b> Ingress interfaces: <b>xe-0/0/31, xe-0/0/32, xe-0/0/33, xe-0/0/34</b>
FCoE queue scheduler	<b>fcoe-sched:</b> Minimum bandwidth <b>3g</b> Maximum bandwidth <b>100%</b> Priority <b>low</b>
Forwarding class-to-scheduler mapping	Scheduler map <b>fcoe-map:</b> Forwarding class <b>fcoe</b> Scheduler <b>fcoe-sched</b>
Forwarding class set (FCoE priority group)	<b>fcoe-pg:</b> Forwarding class <b>fcoe</b> Egress interfaces: <b>xe-0/0/31, xe-0/0/32, xe-0/0/33, xe-0/0/34</b>
Traffic control profile	<b>fcoe-tcp:</b> Scheduler map <b>fcoe-map</b> Minimum bandwidth <b>3g</b> Maximum bandwidth <b>100%</b>

Figure 171 on page 4511 shows a block diagram of the configuration components and the configuration flow of the CLI statements used in the example.

**Figure 187: PFC for FCoE Traffic Configuration Components Block Diagram**

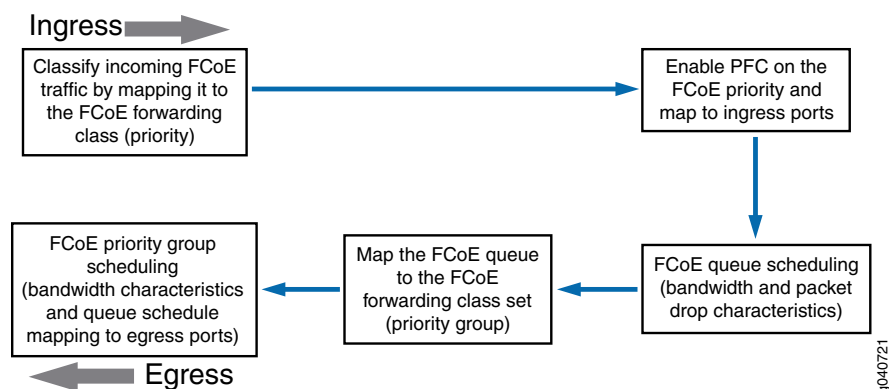



## Configuration

### CLI Quick Configuration

To quickly configure PFC for FCoE traffic, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level:

```
[edit class-of-service]
set classifiers ieee-802.1 fcoe-classifier forwarding-class fcoe loss-priority low code-points 011
set congestion-notification-profile fcoe-cnp input ieee-802.1 code-point 011 pfc
set interfaces xe-0/0/31 unit 0 classifiers ieee-802.1 fcoe-classifier
set interfaces xe-0/0/32 unit 0 classifiers ieee-802.1 fcoe-classifier
set interfaces xe-0/0/33 unit 0 classifiers ieee-802.1 fcoe-classifier
set interfaces xe-0/0/34 unit 0 classifiers ieee-802.1 fcoe-classifier
set interfaces xe-0/0/31 congestion-notification-profile fcoe-cnp
set interfaces xe-0/0/32 congestion-notification-profile fcoe-cnp
set interfaces xe-0/0/33 congestion-notification-profile fcoe-cnp
set interfaces xe-0/0/34 congestion-notification-profile fcoe-cnp
set schedulers fcoe-sched priority low transmit-rate 3g
set schedulers fcoe-sched shaping-rate percent 100
set scheduler-maps fcoe-map forwarding-class fcoe scheduler fcoe-sched
set forwarding-class-sets fcoe-pg class fcoe
set traffic-control-profiles fcoe-tcp scheduler-map fcoe-map guaranteed-rate 3g
set traffic-control-profiles fcoe-tcp shaping-rate percent 100
set interfaces xe-0/0/31 forwarding-class-set fcoe-pg output-traffic-control-profile fcoe-tcp
set interfaces xe-0/0/32 forwarding-class-set fcoe-pg output-traffic-control-profile fcoe-tcp
set interfaces xe-0/0/33 forwarding-class-set fcoe-pg output-traffic-control-profile fcoe-tcp
set interfaces xe-0/0/34 forwarding-class-set fcoe-pg output-traffic-control-profile fcoe-tcp
```

### Step-by-Step Procedure

To configure the FCoE forwarding class (priority), ingress classifier, output queue scheduling, forwarding class set (priority group) and its output port scheduling, PFC application, and interfaces to set up PFC for FCoE traffic:

1. Configure a classifier to set the loss priority and IEEE 802.1 code point assigned to the FCoE forwarding class at the ingress:

```
[edit class-of-service]
user@switch# set classifiers ieee-802.1 fcoe-classifier forwarding-class fcoe loss-priority low code-points 011
```

2. Configure PFC on the FCoE queue by applying FCoE to the IEEE 802.1 code point 011:

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe-cnp input ieee-802.1 code-point 011 pfc
```

3. Apply the PFC configuration to the ingress interfaces:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/31 congestion-notification-profile fcoe-cnp
user@switch# set interfaces xe-0/0/32 congestion-notification-profile fcoe-cnp
user@switch# set interfaces xe-0/0/33 congestion-notification-profile fcoe-cnp
user@switch# set interfaces xe-0/0/34 congestion-notification-profile fcoe-cnp
```

4. Assign the classifier to the ingress interfaces:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/31 unit 0 classifiers ieee-802.1 fcoe-classifier
user@switch# set interfaces xe-0/0/32 unit 0 classifiers ieee-802.1 fcoe-classifier
user@switch# set interfaces xe-0/0/33 unit 0 classifiers ieee-802.1 fcoe-classifier
user@switch# set interfaces xe-0/0/34 unit 0 classifiers ieee-802.1 fcoe-classifier
```



5. Configure output scheduling for the FCoE queue:

```
[edit class-of-service]
user@switch# set schedulers fcoe-sched priority low transmit-rate 3g
user@switch# set schedulers fcoe-sched shaping-rate percent 100
```

6. Map the FCoE forwarding class to the FCoE scheduler:

```
[edit class-of-service]
user@switch# set scheduler-maps fcoe-map forwarding-class fcoe scheduler fcoe-sched
```

7. Configure the forwarding class set for the FCoE traffic:

```
[edit class-of-service]
user@switch# set forwarding-class-sets fcoe-pg class fcoe
```

8. Define the traffic control profile for the FCoE forwarding class set:

```
[edit class-of-service]
user@switch# set traffic-control-profiles fcoe-tcp scheduler-map fcoe-map
guaranteed-rate 3g
user@switch# set traffic-control-profiles fcoe-tcp shaping-rate percent 100
```

9. Apply the FCoE forwarding class set and traffic control profile to the egress ports:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/31 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
user@switch# set interfaces xe-0/0/32 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
user@switch# set interfaces xe-0/0/33 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
user@switch# set interfaces xe-0/0/34 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
```

### Results

Display the results of the configuration (the system shows only the explicitly configured parameters; it does not show default parameters such as the **fcoe** lossless forwarding class):

```
user@switch> show configuration class-of-service
classifiers {
  ieee-802.1 fcoe-classifier {
    forwarding-class fcoe {
      loss-priority low code-points 011;
    }
  }
}
traffic-control-profiles {
  fcoe-tcp {
    scheduler-map fcoe-map;
    shaping-rate percent 100;
    guaranteed-rate 3000000000;
  }
}
forwarding-class-sets {
  fcoe-pg {
    class fcoe;
  }
}
congestion-notification-profile {
  fcoe-cnp {
    input {
```



```
        ieee-802.1 {
            code-point 011 {
                pfc;
            }
        }
    }
}
}
interfaces {
    xe-0/0/31 {
        congestion-notification-profile fcoe-cnp;
        forwarding-class-set {
            fcoe-pg {
                output-traffic-control-profile fcoe-tcp;
            }
        }
        unit 0 {
            classifiers {
                ieee-802.1 fcoe-classifier;
            }
        }
    }
    xe-0/0/32 {
        congestion-notification-profile fcoe-cnp;
        forwarding-class-set {
            fcoe-pg {
                output-traffic-control-profile fcoe-tcp;
            }
        }
        unit 0 {
            classifiers {
                ieee-802.1 fcoe-classifier;
            }
        }
    }
    xe-0/0/33 {
        congestion-notification-profile fcoe-cnp;
        forwarding-class-set {
            fcoe-pg {
                output-traffic-control-profile fcoe-tcp;
            }
        }
        unit 0 {
            classifiers {
                ieee-802.1 fcoe-classifier;
            }
        }
    }
    xe-0/0/34 {
        congestion-notification-profile fcoe-cnp;
        forwarding-class-set {
            fcoe-pg {
                output-traffic-control-profile fcoe-tcp;
            }
        }
        unit 0 {
```



```

        classifiers {
            ieee-802.1 fcoe-classifier;
        }
    }
}
scheduler-maps {
    fcoe-map {
        forwarding-class fcoe scheduler fcoe-sched;
    }
}
schedulers {
    fcoe-sched {
        transmit-rate 30000000000;
        shaping-rate percent 100;
        priority low;
    }
}

```



**TIP:** To quickly configure the interfaces, issue the `load merge terminal` command and then copy the hierarchy and paste it into the switch terminal window.

## Verification

To verify that the PFC configuration for FCoE traffic components has been created and is operating properly, perform these tasks:

- [Verifying That Priority-Based Flow Control Has Been Enabled on page 4989](#)
- [Verifying the Ingress Interface PFC Configuration on page 4990](#)

### *Verifying That Priority-Based Flow Control Has Been Enabled*

**Purpose** Verify that PFC is enabled on the FCoE queue to enable lossless transport.

**Action** List the congestion notification profiles using the operational mode command `show class-of-service congestion-notification`:

```
user@switch> show class-of-service congestion-notification
```

```
Type: Input, Name: fcoe-cnp, Index: 51697
```

```
Cable Length: 100 m
```

Priority	PFC	MRU
000	Disabled	
001	Disabled	
010	Disabled	
011	Enabled	2500
100	Disabled	
101	Disabled	
110	Disabled	
111	Disabled	

```
Type: Output
```

Priority	Flow-Control-Queues
000	



	0
001	
	1
010	
	2
011	
	3
100	
	4
101	
	5
110	
	6
111	
	7

**Meaning** The **show class-of-service congestion-notification** operational command lists all of the congestion notification profiles and which IEEE 802.1p code points have PFC enabled. The command output shows that PFC is enabled on code point **011** for the **fcoe-cnp** congestion notification profile.

The command also shows the default cable length (100 meters), the default maximum receive unit (2500 bytes), and the default mapping of priorities to output queues because this example does not include configuring these options.

#### *Verifying the Ingress Interface PFC Configuration*

**Purpose** Verify that the classifier **fcoe-classifier** and the congestion notification profile **fcoe-cnp** are configured on ingress interfaces **xe-0/0/31**, **xe-0/0/32**, **xe-0/0/33**, and **xe-0/0/34**.

**Action** List the ingress interfaces using the operational mode command **show configuration class-of-service interfaces**:

```
user@switch> show configuration class-of-service interfaces xe-0/0/31
congestion-notification-profile fcoe-cnp;
unit 0 {
    classifiers {
        ieee-802.1 fcoe-classifier;
    }
}

user@switch> show configuration class-of-service interfaces xe-0/0/32
congestion-notification-profile fcoe-cnp;
unit 0 {
    classifiers {
        ieee-802.1 fcoe-classifier;
    }
}

user@switch> show configuration class-of-service interfaces xe-0/0/33
congestion-notification-profile fcoe-cnp;
unit 0 {
    classifiers {
        ieee-802.1 fcoe-classifier;
    }
}
```



```

user@switch> show configuration class-of-service interfaces xe-0/0/34
congestion-notification-profile fcoe-cnp;
unit 0 {
    classifiers {
        ieee-802.1 fcoe-classifier;
    }
}

```

**Meaning** The `show configuration class-of-service interfaces` commands list the congestion notification profile that is mapped to the interface (`fcoe-cnp`) and the IEEE 802.1p classifier associated with the interface (`fcoe-classifier`).

- Related Documentation**
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
  - [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
  - [Overview of CoS Changes Introduced in Junos OS Release 12.2 on page 4820](#)
  - [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)

### Example: Configuring CoS for FCoE Transit Switch Traffic Across an MC-LAG

Multichassis link aggregation groups (MC-LAGs) provide redundancy and load balancing between two QFX3500 switches, multihoming support for client devices such as servers, and a loop-free Layer 2 network without running Spanning Tree protocol (STP).

You can use an MC-LAG to provide a redundant aggregation layer for Fiber Channel over Ethernet (FCoE) traffic in an *inverted-U* topology. To support lossless transport of FCoE traffic across an MC-LAG, you must configure the appropriate class of service (CoS) on both of the QFX3500 switches with MC-LAG port members. The CoS configuration must be the same on both of the MC-LAG switches because an MC-LAG does not carry forwarding class and IEEE 802.1p priority information.



**NOTE:** This example describes how to configure CoS to provide lossless transport for FCoE traffic across an MC-LAG that connects two QFX3500 switches. It also describes how to configure CoS on the FCoE transit switches that connect FCoE hosts to the QFX3500 switches that form the MC-LAG.

This example does *not* describe how to configure the MC-LAG itself. For a detailed example of MC-LAG configuration, see [“Example: Configuring Multichassis Link Aggregation” on page 1958](#). However, this example includes a subset of MC-LAG configuration that only shows how to configure interface membership in the MC-LAG.

Ports that are part of an FCoE-FC gateway configuration (a virtual FCoE-FC gateway fabric) do not support MC-LAGs. Ports that are members of an MC-LAG act as FCoE passthrough transit switch ports.

QFX3500 Node devices support MC-LAGs. QFabric system Node devices do not support MC-LAGs.



This topic describes:

- [Requirements on page 4992](#)
- [Overview on page 4992](#)
- [Configuration on page 4997](#)
- [Verification on page 5005](#)

---

## Requirements

This example uses the following hardware and software components:

- Two Juniper Networks QFX3500 Switches that form an MC-LAG for FCoE traffic.
- Two Juniper Networks QFX3500 Switches that provide FCoE server access in transit switch mode, and connect to the MC-LAG switches. These switches can be standalone QFX3500 switches or they can be Node devices in a QFabric system.
- FCoE servers (or other FCoE hosts) connected to the transit switches.
- Junos OS Release 12.2 or later for the QFX Series.

---

## Overview

FCoE traffic requires lossless transport. This example shows you how to:

- Configure CoS for FCoE traffic on the two QFX3500 switches that form the MC-LAG, including priority-based flow control (PFC) and enhanced transmission selection (ETS; hierarchical scheduling of resources for the FCoE forwarding class priority and for the forwarding class set priority group).
- Configure CoS for FCoE on the two FCoE transit switches that connect FCoE hosts to the MC-LAG switches and enable FIP snooping on the FCoE VLAN at the FCoE transit switch access ports.
- Disable IGMP snooping on the FCoE VLAN.
- Configure the appropriate port mode, MTU, and FCoE trusted or untrusted state for each interface to support lossless FCoE transport.

This example does not show how to configure the MC-LAG itself. This example does include a subset of MC-LAG configuration that only shows how to configure interface membership in the MC-LAG.

## Topology

QFX3500 switches that act as transit switches support MC-LAGs for FCoE traffic in an inverted-U network topology, as shown in [Figure 172 on page 4519](#):



Figure 188: Supported Topology for an MC-LAG on an FCoE Transit Switch

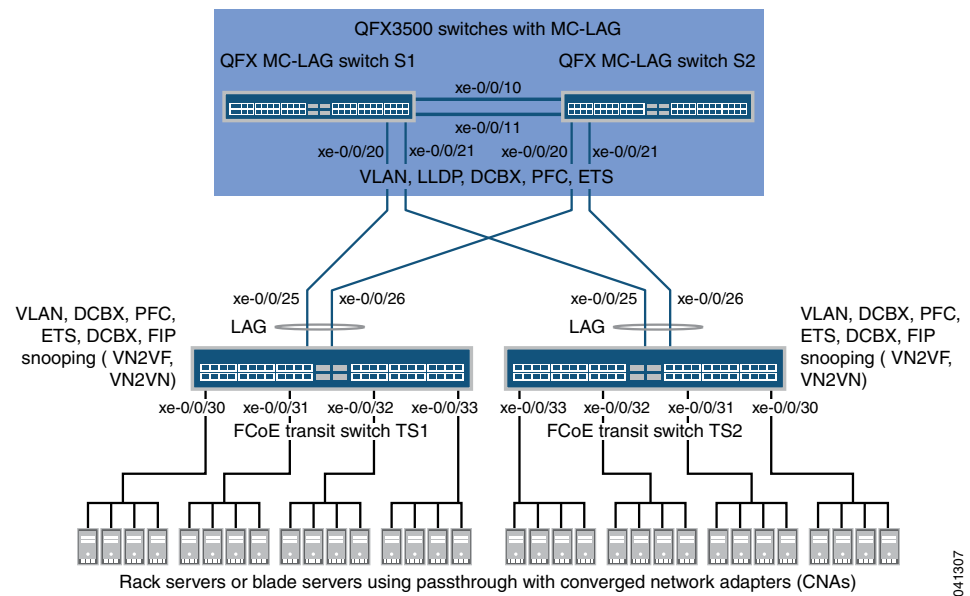


Table 316 on page 4519 shows the configuration components for this example.

Table 418: Components of the CoS for FCoE Traffic Across an MC-LAG Configuration Topology

Component	Settings
Hardware	Four QFX3500 switches (two to form the MC-LAG as passthrough transit switches and two transit switches for FCoE access)
Forwarding class (all switches)	Default <b>fcoe</b> forwarding class.
Classifier (forwarding class mapping of incoming traffic to IEEE priority)	Default IEEE 802.1p trusted classifier on all FCoE interfaces.



Table 418: Components of the CoS for FCoE Traffic Across an MC-LAG Configuration Topology (*continued*)

Component	Settings
LAGs and MC-LAG	<p>S1—Ports xe-0/0/10 and x-0/0/11 are members of LAG <b>ae0</b>, which connects Switch S1 to Switch S2. Ports xe-0/0/20 and xe-0/0/21 are members of MC-LAG <b>ae1</b>. All ports are configured in <b>trunk</b> port mode, as <b>fcoe-trusted</b>, and with an MTU of <b>2180</b>.</p> <p>S2—Ports xe-0/0/10 and x-0/0/11 are members of LAG <b>ae0</b>, which connects Switch S2 to Switch S1. Ports xe-0/0/20 and xe-0/0/21 are members of MC-LAG <b>ae1</b>. All ports are configured in <b>trunk</b> port mode, as <b>fcoe-trusted</b>, and with an MTU of <b>2180</b>.</p> <p><b>NOTE:</b> Ports xe-0/0/20 and xe-0/0/21 on Switches S1 and S2 are the members of the MC-LAG.</p> <p>TS1—Ports xe-0/0/25 and x-0/0/26 are members of LAG <b>ae1</b>, configured in <b>trunk</b> port mode, as <b>fcoe-trusted</b>, and with an MTU of <b>2180</b>. Ports xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33 are configured in <b>tagged-access</b> port mode, with an MTU of <b>2180</b>.</p> <p>TS2—Ports xe-0/0/25 and x-0/0/26 are members of LAG <b>ae1</b>, configured in <b>trunk</b> port mode, as <b>fcoe-trusted</b>, and with an MTU of <b>2180</b>. Ports xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33 are configured in <b>tagged-access</b> port mode, with an MTU of <b>2180</b>.</p>
FCoE queue scheduler (all switches)	<b>fcoe-sched:</b> Minimum bandwidth <b>3g</b> Maximum bandwidth <b>100%</b> Priority <b>low</b>
Forwarding class-to-scheduler mapping (all switches)	Scheduler map <b>fcoe-map</b> : Forwarding class <b>fcoe</b> Scheduler <b>fcoe-sched</b>
Forwarding class set (FCoE priority group, all switches)	<b>fcoe-pg:</b> Forwarding class <b>fcoe</b>  Egress interfaces: <ul style="list-style-type: none"> <li>• S1—LAG <b>ae0</b> and MC-LAG <b>ae1</b></li> <li>• S2—LAG <b>ae0</b> and MC-LAG <b>ae1</b></li> <li>• TS1—LAG <b>ae1</b>, interfaces <b>xe-0/0/30</b>, <b>xe-0/0/31</b>, <b>xe-0/0/32</b>, and <b>xe-0/0/33</b></li> <li>• TS2—LAG <b>ae1</b>, interfaces <b>xe-0/0/30</b>, <b>xe-0/0/31</b>, <b>xe-0/0/32</b>, and <b>xe-0/0/33</b></li> </ul>
Traffic control profile (all switches)	<b>fcoe-tcp:</b> Scheduler map <b>fcoe-map</b> Minimum bandwidth <b>3g</b> Maximum bandwidth <b>100%</b>



**Table 418: Components of the CoS for FCoE Traffic Across an MC-LAG Configuration Topology (continued)**

Component	Settings
PFC congestion notification profile (all switches)	<p><b>fcoe-cnp:</b> Code point 011</p> <p>Ingress interfaces:</p> <ul style="list-style-type: none"> <li>• S1—LAG ae0 and MC-LAG ae1</li> <li>• S2—LAG ae0 and MC-LAG ae1</li> <li>• TS1—LAG ae1, interfaces xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33</li> <li>• TS2—LAG ae1, interfaces xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33</li> </ul>
FCoE VLAN name and tag ID	<p>Name—<b>fcoe_vlan</b> ID—100</p> <p>Include the FCoE VLAN on the interfaces that carry FCoE traffic on all four switches.</p> <p>Disable IGMP snooping on the FCoE VLAN on all four switches.</p>
FIP snooping	<p>Enable FIP snooping on Transit Switches TS1 and TS2 on the FCoE VLAN. Configure the LAG interfaces that connect to the MC-LAG switches as FCoE trusted interfaces so that they do not perform FIP snooping.</p> <p>This example enables VN2VN_Port FIP snooping on the FCoE transit switch interfaces connected to the FCoE servers. The example is equally valid with VN2VF_Port FIP snooping enabled on the transit switch access ports. The method of FIP snooping you enable depends on your network configuration.</p>



**NOTE:** This example uses the default IEEE 802.1p trusted BA classifier, which is automatically applied to trunk mode and tagged access mode ports if you do not apply an explicitly configured classifier.



To configure CoS for FCoE traffic across an MC-LAG:

- Use the default FCoE forwarding class and forwarding-class-to-queue mapping (do not explicitly configure the FCoE forwarding class or output queue). The default FCoE forwarding class is **fcoe**, and the default output queue is **queue 3**.



**NOTE:** In Junos OS Release 12.2, traffic mapped to explicitly configured forwarding classes, even lossless forwarding classes such as **fcoe**, is treated as lossy (**best-effort**) traffic and does *not* receive lossless treatment. To receive lossless treatment in release 12.2, traffic must use one of the default lossless forwarding classes (**fcoe** or **no-loss**).

In Junos OS Release 12.3 and later, you can include the *no-loss* packet drop attribute in the explicit forwarding class configuration to configure a lossless forwarding class.

- Use the default trusted BA classifier, which maps incoming packets to forwarding classes by the IEEE 802.1p code point (CoS priority) of the packet. The trusted classifier is the default classifier for interfaces in trunk and tagged-access port modes. The default trusted classifier maps incoming packets with the IEEE 802.1p code point 3 (011) to the FCoE forwarding class. You can configure the BA classifier if you wish, but you must ensure that FCoE traffic is classified into forwarding classes in exactly the same way on both MC-LAG switches. Using the default classifier ensures consistent classifier configuration on the MC-LAG ports.
- Configure a congestion notification profile that enables PFC on the FCoE code point (code point 011 in this example). The congestion notification profile configuration must be the same on both MC-LAG switches.
- Apply the congestion notification profile to the interfaces.
- Configure enhanced transmission selection (ETS, also known as hierarchical scheduling) on the interfaces to provide the bandwidth required for lossless FCoE transport. Configuring ETS includes configuring bandwidth scheduling for the FCoE forwarding class, a forwarding class set (priority group) that includes the FCoE forwarding class, and a traffic control profile to assign bandwidth to the forwarding class set that includes FCoE traffic.
- Apply the ETS scheduling to the interfaces.
- Configure the port mode, MTU, and FCoE trusted or untrusted state for each interface to support lossless FCoE transport.

In addition, this example describes how to enable FIP snooping on the Transit Switch TS1 and TS2 ports that are connected to the FCoE servers and how to disable IGMP snooping on the FCoE VLAN. To provide secure access, FIP snooping must be enabled on the FCoE access ports.

This example focuses on the CoS configuration to support lossless FCoE transport across an MC-LAG. This example does not describe how to configure the properties of MC-LAGs and LAGs, although it does show you how to configure the port characteristics required



to support lossless transport and how to assign interfaces to the MC-LAG and to the LAGs.

Before you configure CoS, configure:

- The MC-LAGs that connect Switches S1 and S2 to Switches TS1 and TS2. ([“Example: Configuring Multichassis Link Aggregation” on page 1958](#) describes how to configure MC-LAGs.)
- The LAGs that connect the Transit Switches TS1 and TS2 to MC-LAG Switches S1 and S2. ([“Configuring Link Aggregation” on page 2033](#) describes how to configure LAGs.)
- The LAG that connects Switch S1 to Switch S2.

### Configuration

To configure CoS for lossless FCoE transport across an MC-LAG, perform these tasks:

- [Configuring MC-LAG Switches S1 and S2 on page 4999](#)
- [Configuring FCoE Transit Switches TS1 and TS2 on page 5000](#)
- [Results on page 5002](#)

#### CLI Quick Configuration

To quickly configure CoS for lossless FCoE transport across an MC-LAG, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI for MC-LAG Switch S1 and MC-LAG Switch S2 at the [edit] hierarchy level. The configurations on Switches S1 and S2 are identical because the CoS configuration must be identical, and because this example uses the same ports on both switches.

```
set class-of-service schedulers fcoe-sched priority low transmit-rate 3g
set class-of-service schedulers fcoe-sched shaping-rate percent 100
set class-of-service scheduler-maps fcoe-map forwarding-class fcoe scheduler fcoe-sched
set class-of-service forwarding-class-sets fcoe-pg class fcoe
set class-of-service traffic-control-profiles fcoe-tcp scheduler-map fcoe-map guaranteed-rate
3g
set class-of-service traffic-control-profiles fcoe-tcp shaping-rate percent 100
set class-of-service interfaces ae0 forwarding-class-set fcoe-pg output-traffic-control-profile
fcoe-tcp
set class-of-service interfaces ae1 forwarding-class-set fcoe-pg output-traffic-control-profile
fcoe-tcp
set class-of-service congestion-notification-profile fcoe-cnp input ieee-802.1 code-point 011 pfc
set class-of-service interfaces ae0 congestion-notification-profile fcoe-cnp
set class-of-service interfaces ae1 congestion-notification-profile fcoe-cnp
set vlans fcoe_vlan vlan-id 100
set protocols igmp-snooping vlan fcoe_vlan disable
set interfaces xe-0/0/10 ether-options 802.3ad ae0
set interfaces xe-0/0/11 ether-options 802.3ad ae0
set interfaces xe-0/0/20 ether-options 802.3ad ae1
set interfaces xe-0/0/21 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk vlan members fcoe_vlan
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk vlan members fcoe_vlan
set interfaces ae0 mtu 2180
set interfaces ae1 mtu 2180
set ethernet-switching-options secure-access-port interface ae0 fcoe-trusted
set ethernet-switching-options secure-access-port interface ae1 fcoe-trusted
```



To quickly configure CoS for lossless FCoE transport across an MC-LAG, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI for Transit Switch TS1 and Transit Switch TS2 at the [edit] hierarchy level. The configurations on Switches TS1 and TS2 are identical because the CoS configuration must be identical, and because this example uses the same ports on both switches.

```
set class-of-service schedulers fcoe-sched priority low transmit-rate 3g
set class-of-service schedulers fcoe-sched shaping-rate percent 100
set class-of-service scheduler-maps fcoe-map forwarding-class fcoe scheduler fcoe-sched
set class-of-service forwarding-class-sets fcoe-pg class fcoe
set class-of-service traffic-control-profiles fcoe-tcp scheduler-map fcoe-map guaranteed-rate
3g
set class-of-service traffic-control-profiles fcoe-tcp shaping-rate percent 100
set class-of-service interfaces ae1 forwarding-class-set fcoe-pg output-traffic-control-profile
fcoe-tcp
set class-of-service interfaces xe-0/0/30 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
set class-of-service interfaces xe-0/0/31 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
set class-of-service interfaces xe-0/0/32 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
set class-of-service interfaces xe-0/0/33 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
set class-of-service congestion-notification-profile fcoe-cnp input ieee-802.1 code-point 011 pfc
set class-of-service interfaces ae1 congestion-notification-profile fcoe-cnp
set class-of-service interfaces xe-0/0/30 congestion-notification-profile fcoe-cnp
set class-of-service interfaces xe-0/0/31 congestion-notification-profile fcoe-cnp
set class-of-service interfaces xe-0/0/32 congestion-notification-profile fcoe-cnp
set class-of-service interfaces xe-0/0/33 congestion-notification-profile fcoe-cnp
set vlans fcoe_vlan vlan-id 100
set protocols igmp-snooping vlan fcoe_vlan disable
set interfaces xe-0/0/25 ether-options 802.3ad ae1
set interfaces xe-0/0/26 ether-options 802.3ad ae1
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk vlan members fcoe_vlan
set interfaces xe-0/0/30 unit 0 family ethernet-switching port-mode tagged-access vlan members
fcoe_vlan
set interfaces xe-0/0/31 unit 0 family ethernet-switching port-mode tagged-access vlan members
fcoe_vlan
set interfaces xe-0/0/32 unit 0 family ethernet-switching port-mode tagged-access vlan members
fcoe_vlan
set interfaces xe-0/0/33 unit 0 family ethernet-switching port-mode tagged-access vlan members
fcoe_vlan
set interfaces ae1 mtu 2180
set interfaces xe-0/0/30 mtu 2180
set interfaces xe-0/0/31 mtu 2180
set interfaces xe-0/0/32 mtu 2180
set interfaces xe-0/0/33 mtu 2180
set ethernet-switching-options secure-access-port interface ae1 fcoe-trusted
set ethernet-switching-options secure-access-port vlan fcoe_vlan examine-fip examine-vn2v2
beacon-period 90000
```



**Configuring MC-LAG Switches S1 and S2**

**Step-by-Step Procedure** To configure CoS resource scheduling (ETS), PFC, the FCoE VLAN, and the LAG and MC-LAG interface membership and characteristics to support lossless FCoE transport across an MC-LAG (this example uses the default **fcoe** forwarding class and the default classifier to map incoming FCoE traffic to the FCoE IEEE 802.1p code point **011**, so you do not configure them):

1. Configure output scheduling for the FCoE queue:
 

```
[edit class-of-service]
user@switch# set schedulers fcoe-sched priority low transmit-rate 3g
user@switch# set schedulers fcoe-sched shaping-rate percent 100
```
2. Map the FCoE forwarding class to the FCoE scheduler (**fcoe-sched**):
 

```
[edit class-of-service]
user@switch# set scheduler-maps fcoe-map forwarding-class fcoe scheduler fcoe-sched
```
3. Configure the forwarding class set (**fcoe-pg**) for the FCoE traffic:
 

```
[edit class-of-service]
user@switch# set forwarding-class-sets fcoe-pg class fcoe
```
4. Define the traffic control profile (**fcoe-tcp**) to use on the FCoE forwarding class set:
 

```
[edit class-of-service]
user@switch# set traffic-control-profiles fcoe-tcp scheduler-map fcoe-map
guaranteed-rate 3g
user@switch# set traffic-control-profiles fcoe-tcp shaping-rate percent 100
```
5. Apply the FCoE forwarding class set and traffic control profile to the LAG and MC-LAG interfaces:
 

```
[edit class-of-service]
user@switch# set interfaces ae0 forwarding-class-set fcoe-pg output-traffic-control-profile
fcoe-tcp
user@switch# set interfaces ae1 forwarding-class-set fcoe-pg output-traffic-control-profile
fcoe-tcp
```
6. Enable PFC on the FCoE priority by creating a congestion notification profile (**fcoe-cnp**) that applies FCoE to the IEEE 802.1 code point **011**:
 

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe-cnp input ieee-802.1 code-point
011 pfc
```
7. Apply the PFC configuration to the LAG and MC-LAG interfaces:
 

```
[edit class-of-service]
user@switch# set interfaces ae0 congestion-notification-profile fcoe-cnp
user@switch# set interfaces ae1 congestion-notification-profile fcoe-cnp
```
8. Configure the VLAN for FCoE traffic (**fcoe\_vlan**):
 

```
[edit vlans]
user@switch# set fcoe_vlan vlan-id 100
```
9. Disable IGMP snooping on the FCoE VLAN:
 

```
[edit protocols]
user@switch# set igmp-snooping vlan fcoe_vlan disable
```



10. Add the member interfaces to the LAG between the two MC-LAG switches:

```
[edit interfaces]
user@switch# set xe-0/0/10 ether-options 802.3ad ae0
user@switch# set xe-0/0/11 ether-options 802.3ad ae0
```

11. Add the member interfaces to the MC-LAG:

```
[edit interfaces]
user@switch# set xe-0/0/20 ether-options 802.3ad ae1
user@switch# set xe-0/0/21 ether-options 802.3ad ae1
```

12. Configure the port mode as **trunk** and membership in the FCoE VLAN (**fcoe\_vlan**) for the LAG (**ae0**) and for the MC-LAG (**ae1**):

```
[edit interfaces]
user@switch# set interfaces ae0 unit 0 family ethernet-switching port-mode trunk vlan
members fcoe_vlan
user@switch# set interfaces ae1 unit 0 family ethernet-switching port-mode trunk vlan
members fcoe_vlan
```

13. Set the MTU to **2180** for the LAG and MC-LAG interfaces (2180 bytes is the minimum size required to handle FCoE packets because of the payload and header sizes; you can configure the MTU to a higher number of bytes if desired, but not less than 2180 bytes):

```
[edit interfaces]
user@switch# set ae0 mtu 2180
user@switch# set ae1 mtu 2180
```

14. Set the LAG and MC-LAG interfaces as FCoE trusted ports (ports that connect to other switches should be trusted and should not perform FIP snooping):

```
user@switch# set ethernet-switching-options secure-access-port interface ae0 fcoe-trusted
user@switch# set ethernet-switching-options secure-access-port interface ae1 fcoe-trusted
```

### *Configuring FCoE Transit Switches TS1 and TS2*

#### **Step-by-Step Procedure**

The CoS configuration on FCoE Transit Switches TS1 and TS2 is similar to the CoS configuration on MC-LAG Switches S1 and S2. However, the port configurations differ, and you must enable FIP snooping on the Switch TS1 and Switch TS2 FCoE access ports.

To configure resource scheduling (ETS), PFC, the FCoE VLAN, and the LAG interface membership and characteristics to support lossless FCoE transport across the MC-LAG (this example uses the default **fcoe** forwarding class and the default classifier to map incoming FCoE traffic to the FCoE IEEE 802.1p code point **011**, so you do not configure them):

1. Configure output scheduling for the FCoE queue:

```
[edit class-of-service]
user@switch# set schedulers fcoe-sched priority low transmit-rate 3g
user@switch# set schedulers fcoe-sched shaping-rate percent 100
```

2. Map the FCoE forwarding class to the FCoE scheduler (**fcoe-sched**):

```
[edit class-of-service]
user@switch# set scheduler-maps fcoe-map forwarding-class fcoe scheduler fcoe-sched
```

3. Configure the forwarding class set (**fcoe-pg**) for the FCoE traffic:



- ```
[edit class-of-service]
user@switch# set forwarding-class-sets fcoe-pg class fcoe
```
4. Define the traffic control profile (**fcoe-tcp**) to use on the FCoE forwarding class set:
 

```
[edit class-of-service]
user@switch# set traffic-control-profiles fcoe-tcp scheduler-map fcoe-map
guaranteed-rate 3g
user@switch# set traffic-control-profiles fcoe-tcp shaping-rate percent 100
```
  5. Apply the FCoE forwarding class set and traffic control profile to the LAG interface and to the FCoE access interfaces:
 

```
[edit class-of-service]
user@switch# set interfaces ae1 forwarding-class-set fcoe-pg output-traffic-control-profile
fcoe-tcp
user@switch# set class-of-service interfaces xe-0/0/30 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
user@switch# set class-of-service interfaces xe-0/0/31 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
user@switch# set class-of-service interfaces xe-0/0/32 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
user@switch# set class-of-service interfaces xe-0/0/33 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
```
  6. Enable PFC on the FCoE priority by creating a congestion notification profile (**fcoe-cnp**) that applies FCoE to the IEEE 802.1 code point 011:
 

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe-cnp input ieee-802.1 code-point
011 pfc
```
  7. Apply the PFC configuration to the LAG interface and to the FCoE access interfaces:
 

```
[edit class-of-service]
user@switch# set interfaces ae1 congestion-notification-profile fcoe-cnp
user@switch# set class-of-service interfaces xe-0/0/30 congestion-notification-profile
fcoe-cnp
user@switch# set class-of-service interfaces xe-0/0/31 congestion-notification-profile
fcoe-cnp
user@switch# set class-of-service interfaces xe-0/0/32 congestion-notification-profile
fcoe-cnp
user@switch# set class-of-service interfaces xe-0/0/33 congestion-notification-profile
fcoe-cnp
```
  8. Configure the VLAN for FCoE traffic (**fcoe\_vlan**):
 

```
[edit vlans]
user@switch# set fcoe_vlan vlan-id 100
```
  9. Disable IGMP snooping on the FCoE VLAN:
 

```
[edit protocols]
user@switch# set igmp-snooping vlan fcoe_vlan disable
```
  10. Add the member interfaces to the LAG:
 

```
[edit interfaces]
user@switch# set xe-0/0/25 ether-options 802.3ad ae1
user@switch# set xe-0/0/26 ether-options 802.3ad ae1
```
  11. On the LAG (**ae1**), configure the port mode as **trunk** and membership in the FCoE VLAN (**fcoe\_vlan**):



```
[edit interfaces]
user@switch# set interfaces ae1 unit 0 family ethernet-switching port-mode trunk vlan
members fcoe_vlan
```

12. On the FCoE access interfaces (xe-0/0/30, xe-0/0/31, xe-0/0/32, xe-0/0/33), configure the port mode as **tagged-access** and membership in the FCoE VLAN (**fcoe\_vlan**):

```
[edit interfaces]
user@switch# set interfaces xe-0/0/30 unit 0 family ethernet-switching port-mode
tagged-access vlan members fcoe_vlan
user@switch# set interfaces xe-0/0/31 unit 0 family ethernet-switching port-mode
tagged-access vlan members fcoe_vlan
user@switch# set interfaces xe-0/0/32 unit 0 family ethernet-switching port-mode
tagged-access vlan members fcoe_vlan
user@switch# set interfaces xe-0/0/33 unit 0 family ethernet-switching port-mode
tagged-access vlan members fcoe_vlan
```

13. Set the MTU to **2180** for the LAG and FCoE access interfaces (2180 bytes is the minimum size required to handle FCoE packets because of the payload and header sizes; you can configure the MTU to a higher number of bytes if desired, but not less than 2180 bytes):

```
[edit interfaces]
user@switch# set ae1 mtu 2180
user@switch# set xe-0/0/30 mtu 2180
user@switch# set xe-0/0/31 mtu 2180
user@switch# set xe-0/0/32 mtu 2180
user@switch# set xe-0/0/33 mtu 2180
```

14. Set the LAG interface as an FCoE trusted port (ports that connect to other switches should be trusted and should not perform FIP snooping):

```
user@switch# set ethernet-switching-options secure-access-port interface ae1 fcoe-trusted
```

15. Enable FIP snooping on the FCoE VLAN to prevent unauthorized FCoE network access (this example uses VN2VN\_Port FIP snooping; the example is equally valid if you use VN2VF\_Port FIP snooping):

```
user@switch# set ethernet-switching-options secure-access-port vlan fcoe_vlan
examine-fip examine-vn2v2 beacon-period 90000
```

## Results

Display the results of the CoS configuration on MC-LAG Switch S1 and on MC-LAG Switch S2 (the results on both switches are similar):

```
user@switch> show configuration class-of-service
traffic-control-profiles {
  fcoe-tcp {
    scheduler-map fcoe-map;
    shaping-rate percent 100;
    guaranteed-rate 30000000000;
  }
}
forwarding-class-sets {
  fcoe-pg {
    class fcoe;
  }
}
```



```

}
congestion-notification-profile {
  fcoe-cnp {
    input {
      ieee-802.1 {
        code-point 011 {
          pfc;
        }
      }
    }
  }
}
interfaces {
  ae0 {
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    congestion-notification-profile fcoe-cnp;
  }
  ae1 {
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    congestion-notification-profile fcoe-cnp;
  }
}
scheduler-maps {
  fcoe-map {
    forwarding-class fcoe scheduler fcoe-sched;
  }
}
schedulers {
  fcoe-sched {
    transmit-rate 3000000000;
    shaping-rate percent 100;
    priority low;
  }
}

```



**NOTE:** The forwarding class and classifier configurations are not shown because the show command does not display default portions of the configuration.

For MC-LAG verification commands, see [“Example: Configuring Multichassis Link Aggregation” on page 1958](#).

Display the results of the CoS configuration on FCoE Transit Switch TS1 and on FCoE Transit Switch TS2 (the results on both transit switches are similar):



```
user@switch> show configuration class-of-service
traffic-control-profiles {
  fcoe-tcp {
    scheduler-map fcoe-map;
    shaping-rate percent 100;
    guaranteed-rate 3000000000;
  }
}
forwarding-class-sets {
  fcoe-pg {
    class fcoe;
  }
}
congestion-notification-profile {
  fcoe-cnp {
    input {
      ieee-802.1 {
        code-point 011 {
          pfc;
        }
      }
    }
  }
}
interfaces {
  xe-0/0/30 {
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    congestion-notification-profile fcoe-cnp;
  }
  xe-0/0/31 {
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    congestion-notification-profile fcoe-cnp;
  }
  xe-0/0/32 {
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    congestion-notification-profile fcoe-cnp;
  }
  xe-0/0/33 {
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    congestion-notification-profile fcoe-cnp;
  }
}
```



```

}
ae1 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
}
scheduler-maps {
  fcoe-map {
    forwarding-class fcoe scheduler fcoe-sched;
  }
}
schedulers {
  fcoe-sched {
    transmit-rate 3000000000;
    shaping-rate percent 100;
    priority low;
  }
}
}

```



**NOTE:** The forwarding class and classifier configurations are not shown because the show command does not display default portions of the configuration.

## Verification

To verify that the CoS components and FIP snooping have been configured and are operating properly, perform these tasks. Because this example uses the default **fcoe** forwarding class and the default IEEE 802.1p trusted classifier, the verification of those configurations is not shown:

- [Verifying That the Output Queue Schedulers Have Been Created on page 5006](#)
- [Verifying That the Priority Group Output Scheduler \(Traffic Control Profile\) Has Been Created on page 5006](#)
- [Verifying That the Forwarding Class Set \(Priority Group\) Has Been Created on page 5007](#)
- [Verifying That Priority-Based Flow Control Has Been Enabled on page 5007](#)
- [Verifying That the Interface Class of Service Configuration Has Been Created on page 5008](#)
- [Verifying That the Interfaces Are Correctly Configured on page 5010](#)
- [Verifying That FIP Snooping Is Enabled on the FCoE VLAN on FCoE Transit Switches TS1 and TS2 Access Interfaces on page 5012](#)
- [Verifying That the FIP Snooping Mode is Correct on FCoE Transit Switches TS1 and TS2 on page 5013](#)
- [Verifying That IGMP Snooping Is Disabled on the FCoE VLAN on page 5013](#)



***Verifying That the Output Queue Schedulers Have Been Created***

**Purpose** Verify that the output queue scheduler for FCoE traffic has the correct bandwidth parameters and priorities, and is mapped to the correct forwarding class (output queue). Queue scheduler verification is the same on each of the four switches.

**Action** List the scheduler map using the operational mode command **show class-of-service scheduler-map fcoe-map**:

```
user@switch> show class-of-service scheduler-map fcoe-map
Scheduler map: fcoe-map, Index: 9023
```

```
Scheduler: fcoe-sched, Forwarding class: fcoe, Index: 37289
Transmit rate: 3000000000 bps, Rate Limit: none, Buffer size: remainder,
Buffer Limit: none, Priority: low
Excess Priority: unspecified
Shaping rate: 100 percent,
drop-profile-map-set-type: mark
Drop profiles:
  Loss priority  Protocol  Index  Name
  Low           any       1      <default-drop-profile>
  Medium high   any       1      <default-drop-profile>
  High          any       1      <default-drop-profile>
```

**Meaning** The **show class-of-service scheduler-map fcoe-map** command lists the properties of the scheduler map **fcoe-map**. The command output includes:

- The name of the scheduler map (**fcoe-map**)
- The name of the scheduler (**fcoe-sched**)
- The forwarding classes mapped to the scheduler (**fcoe**)
- The minimum guaranteed queue bandwidth (transmit rate **3000000000 bps**)
- The scheduling priority (**low**)
- The maximum bandwidth in the priority group the queue can consume (shaping rate **100 percent**)
- The drop profile loss priority for each drop profile name. This example does not include drop profiles because you do not apply drop profiles to FCoE traffic.

***Verifying That the Priority Group Output Scheduler (Traffic Control Profile) Has Been Created***

**Purpose** Verify that the traffic control profile **fcoe-tcp** has been created with the correct bandwidth parameters and scheduler mapping. Priority group scheduler verification is the same on each of the four switches.

**Action** List the FCoE traffic control profile properties using the operational mode command **show class-of-service traffic-control-profile fcoe-tcp**:

```
user@switch> show class-of-service traffic-control-profile fcoe-tcp
Traffic control profile: fcoe-tcp, Index: 18303
Shaping rate: 100 percent
```



Scheduler map: fcoe-map  
Guaranteed rate: 3000000000

**Meaning** The **show class-of-service traffic-control-profile fcoe-tcp** command lists all of the configured traffic control profiles. For each traffic control profile, the command output includes:

- The name of the traffic control profile (**fcoe-tcp**)
- The maximum port bandwidth the priority group can consume (shaping rate **100 percent**)
- The scheduler map associated with the traffic control profile (**fcoe-map**)
- The minimum guaranteed priority group port bandwidth (guaranteed rate **3000000000** in bps)

#### *Verifying That the Forwarding Class Set (Priority Group) Has Been Created*

**Purpose** Verify that the FCoE priority group has been created and that the **fcoe** priority (forwarding class) belongs to the FCoE priority group. Forwarding class set verification is the same on each of the four switches.

**Action** List the forwarding class sets using the operational mode command **show class-of-service forwarding-class-set fcoe-pg**:

```
user@switch> show class-of-service forwarding-class-set fcoe-pg
Forwarding class set: fcoe-pg, Type: normal-type, Forwarding class set index:
31420
  Forwarding class          Index
  fcoe                      1
```

**Meaning** The **show class-of-service forwarding-class-set fcoe-pg** command lists all of the forwarding classes (priorities) that belong to the **fcoe-pg** priority group, and the internal index number of the priority group. The command output shows that the forwarding class set **fcoe-pg** includes the forwarding class **fcoe**.

#### *Verifying That Priority-Based Flow Control Has Been Enabled*

**Purpose** Verify that PFC is enabled on the FCoE code point. PFC verification is the same on each of the four switches.

**Action** List the FCoE congestion notification profile using the operational mode command **show class-of-service congestion-notification fcoe-cnp**:

```
user@switch> show class-of-service congestion-notification fcoe-cnp
Type: Input, Name: fcoe-cnp, Index: 6879
Cable Length: 100 m
  Priority    PFC          MRU
  000        Disabled
  001        Disabled
  010        Disabled
  011        Enabled    2500
  100        Disabled
  101        Disabled
```



|              |                     |
|--------------|---------------------|
| 110          | Disabled            |
| 111          | Disabled            |
| Type: Output |                     |
| Priority     | Flow-Control-Queues |
| 000          |                     |
|              | 0                   |
| 001          |                     |
|              | 1                   |
| 010          |                     |
|              | 2                   |
| 011          |                     |
|              | 3                   |
| 100          |                     |
|              | 4                   |
| 101          |                     |
|              | 5                   |
| 110          |                     |
|              | 6                   |
| 111          |                     |
|              | 7                   |

**Meaning** The **show class-of-service congestion-notification fcoe-cnp** command lists all of the IEEE 802.1p code points in the congestion notification profile that have PFC enabled. The command output shows that PFC is enabled on code point **011** (**fcoe** queue) for the **fcoe-cnp** congestion notification profile.

The command also shows the default cable length (100 meters), the default maximum receive unit (2500 bytes), and the default mapping of priorities to output queues because this example does not include configuring these options.

#### ***Verifying That the Interface Class of Service Configuration Has Been Created***

**Purpose** Verify that the CoS properties of the interfaces are correct. The verification output on MC-LAG Switches S1 and S2 differs from the output on FCoE Transit Switches TS1 and TS2.

**Action** List the interface CoS configuration on MC-LAG Switches S1 and S2 using the operational mode command **show configuration class-of-service interfaces**:

```
user@switch> show configuration class-of-service interfaces
ae0 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}

ae1 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
```



```
}
```

List the interface CoS configuration on FCoE Transit Switches TS1 and TS2 using the operational mode command **show configuration class-of-service interfaces**:

```
user@switch> show configuration class-of-service interfaces
xe-0/0/30 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
xe-0/0/31 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
xe-0/0/32 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
xe-0/0/33 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
ae1 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
```

**Meaning** The **show configuration class-of-service interfaces** command lists the class of service configuration for all interfaces. For each interface, the command output includes:

- The name of the interface (for example, **ae0** or **xe-0/0/30**)
- The name of the forwarding class set associated with the interface (**fcoe-pg**)
- The name of the traffic control profile associated with the interface (output traffic control profile, **fcoe-tcp**)
- The name of the congestion notification profile associated with the interface (**fcoe-cnp**)





**NOTE:** Interfaces that are members of a LAG are not shown individually. The LAG or MC-LAG CoS configuration is applied to all interfaces that are members of the LAG or MC-LAG. For example, the interface CoS configuration output on MC-LAG Switches S1 and S2 shows the LAG CoS configuration but does not show the CoS configuration of the member interfaces separately. The interface CoS configuration output on FCoE Transit Switches TS1 and TS2 shows the LAG CoS configuration but also shows the configuration for interfaces xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33, which are not members of a LAG.

### ***Verifying That the Interfaces Are Correctly Configured***

**Purpose** Verify that the LAG membership, MTU, VLAN membership, and port mode of the interfaces are correct. The verification output on MC-LAG Switches S1 and S2 differs from the output on FCoE Transit Switches T1 and T2.

**Action** List the interface configuration on MC-LAG Switches S1 and S2 using the operational mode command **show configuration interfaces**:

```
user@switch> show configuration interfaces
xe-0/0/10 {
    ether-options {
        802.3ad ae0;
    }
}
xe-0/0/11 {
    ether-options {
        802.3ad ae0;
    }
}
xe-0/0/20 {
    ether-options {
        802.3ad ae1;
    }
}
xe-0/0/21 {
    ether-options {
        802.3ad ae1;
    }
}
ae0 {
    mtu 2180;
    unit 0 {
        family ethernet-switching {
            port-mode trunk;
            vlan {
                members fcoe_vlan;
            }
        }
    }
}
ae1 {
    mtu 2180;
    unit 0 {
```



```

        family ethernet-switching {
            port-mode trunk;
            vlan {
                members fcoe_vlan;
            }
        }
    }
}

```

List the interface configuration on FCoE Transit Switches TS1 and TS2 using the operational mode command **show configuration interfaces**:

```

user@switch> show configuration interfaces
xe-0/0/25 {
    ether-options {
        802.3ad ae1;
    }
}
xe-0/0/26 {
    ether-options {
        802.3ad ae1;
    }
}
xe-0/0/30 {
    mtu 2180;
    unit 0 {
        family ethernet-switching {
            port-mode tagged-access;
            vlan {
                members fcoe_vlan;
            }
        }
    }
}
xe-0/0/31 {
    mtu 2180;
    unit 0 {
        family ethernet-switching {
            port-mode tagged-access;
            vlan {
                members fcoe_vlan;
            }
        }
    }
}
xe-0/0/32 {
    mtu 2180;
    unit 0 {
        family ethernet-switching {
            port-mode tagged-access;
            vlan {
                members fcoe_vlan;
            }
        }
    }
}
xe-0/0/33 {
    mtu 2180;
    unit 0 {
        family ethernet-switching {

```



```
        port-mode tagged-access;
        vlan {
            members fcoe_vlan;
        }
    }
}

ae1 {
    mtu 2180;
    unit 0 {
        family ethernet-switching {
            port-mode trunk;
            vlan {
                members fcoe_vlan;
            }
        }
    }
}
```

**Meaning** The **show configuration interfaces** command lists the configuration of each interface by interface name.

For each interface that is a member of a LAG, the command lists only the name of the LAG to which the interface belongs.

For each LAG interface and for each interface that is not a member of a LAG, the command output includes:

- The MTU (**2180**)
- The unit number of the interface (**0**)
- The port mode (**trunk** mode for interfaces that connect two switches, **tagged-access** mode for interfaces that connect to FCoE hosts)
- The name of the VLAN in which the interface is a member (**fcoe\_vlan**)

***Verifying That FIP Snooping Is Enabled on the FCoE VLAN on FCoE Transit Switches TS1 and TS2 Access Interfaces***

**Purpose** Verify that FIP snooping is enabled on the FCoE VLAN access interfaces. FIP snooping is enabled only on the FCoE access interfaces, so it is enabled only on FCoE Transit Switches TS1 and TS2. FIP snooping is not enabled on MC-LAG Switches S1 and S2 because FIP snooping is done at the Switch TS1 and TS2 FCoE access ports.

**Action** List the port security configuration on FCoE transit switches TS1 and TS2 using the operational mode command **show configuration ethernet-switching-options secure-access-port**:

```
user@switch> show configuration ethernet-switching-options secure-access-port
interface ae1.0 {
    fcoe-trusted;
}
vlan fcoe_vlan {
```



```
    examine-fip;
}
```

**Meaning** The `show configuration ethernet-switching-options secure-access-port` command lists port security information, including whether a port is trusted. The command output shows that:

- LAG port **ae1.0**, which connects the FCoE transit switch to the MC-LAG switches, is configured as an FCoE trusted interface. FIP snooping is not performed on the member interfaces of the LAG (**xe-0/0/25** and **xe-0/0/26**).
- FIP snooping is enabled (**examine-fip**) on the FCoE VLAN (**fcoe\_vlan**). On Switches TS1 and TS2, all interface members of the FCoE VLAN perform FIP snooping unless the interface is configured as FCoE trusted. On Switches TS1 and TS2, interfaces **xe-0/0/30**, **xe-0/0/31**, **xe-0/0/32**, and **xe-0/0/33** perform FIP snooping because they are not configured as FCoE trusted. The interface members of LAG **ae1** (**xe-0/0/25** and **xe-0/0/26**) do not perform FIP snooping because the LAG is configured as FCoE trusted.

#### *Verifying That the FIP Snooping Mode is Correct on FCoE Transit Switches TS1 and TS2*

**Purpose** Verify that the FIP snooping mode is correct on the FCoE VLAN. FIP snooping is enabled only on the FCoE access interfaces, so it is enabled only on FCoE Transit Switches TS1 and TS2. FIP snooping is not enabled on MC-LAG Switches S1 and S2 because FIP snooping is done at the Switch TS1 and TS2 FCoE access ports.

**Action** List the FIP snooping configuration on FCoE Transit Switches TS1 and TS2 using the operational mode command **show fip snooping brief**:

```
user@switch> show fip snooping brief
VLAN: fcoe_vlan,    Mode: VN2VN Snooping
FC-MAP: 0e:fc:00
...
```



**NOTE:** The output has been truncated to show only the relevant information.

**Meaning** The `show fip snooping brief` command lists FIP snooping information, including the FIP snooping VLAN and the FIP snooping mode. The command output shows that:

- The VLAN on which FIP snooping is enabled is **fcoe\_vlan**
- The FIP snooping mode is VN2VN\_Port FIP snooping (**VN2VN Snooping**)

#### *Verifying That IGMP Snooping Is Disabled on the FCoE VLAN*

**Purpose** Verify that IGMP snooping is disabled on the FCoE VLAN on all four switches.



**Action** List the IGMP snooping protocol information on each of the four switches using the **show configuration protocols igmp-snooping** command:

```
user@switch> show configuration protocols igmp-snooping
vlan fcoe_vlan {
    disable;
}
```

**Meaning** The **show configuration protocols igmp-snooping** command lists the IGMP snooping configuration for the VLANs configured on the switch. The command output shows that IGMP snooping is disabled on the FCoE VLAN (**fcoe\_vlan**).

- Related Documentation**
- [Example: Configuring Multichassis Link Aggregation on page 1958](#)
  - [Configuring Link Aggregation on page 2033](#)
  - [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)
  - [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
  - [Understanding Multichassis Link Aggregation on page 1931](#)
  - [Understanding MC-LAGs on an FCoE Transit Switch on page 4459](#)

## Example: Configuring Unicast Classifiers

Packet classification associates incoming packets with a particular CoS servicing level. Classifiers associate packets with a forwarding class and loss priority and assign packets to output queues based on the associated forwarding class. You apply classifiers to ingress interfaces.

- [Requirements on page 5014](#)
- [Overview on page 5014](#)
- [Configuring Unicast Classifiers on page 5015](#)
- [Verification on page 5016](#)

### Requirements

---

This example uses the following hardware and software components:

- A Juniper Networks QFX3500 Switch
- Junos OS Release 11.1 or later for the QFX Series

### Overview

---

Junos OS supports three general types of classifiers:

- Behavior aggregate or CoS value traffic classifiers—Examine the CoS value in the packet header. The value in this single field determines the CoS settings applied to the packet. BA classifiers allow you to set the forwarding class and loss priority of a packet based on the Differentiated Services code point (DSCP or DSCP IPv6) value or IEEE 802.1p value.



- Fixed classifiers. Fixed classifiers classify all ingress traffic on a physical interface into one forwarding class, regardless of the CoS bits in the packet header.
- Multifield traffic classifiers—Examine multiple fields in the packet, such as source and destination addresses and source and destination port numbers of the packet. With multifield classifiers, you set the forwarding class and loss priority of a packet based on firewall filter rules.



**NOTE:** You must assign unicast traffic and multidestination (multicast, broadcast, and destination lookup fail) traffic to different classifiers. One classifier cannot include both unicast and multidestination forwarding classes. A unicast classifier can include only forwarding classes for unicast traffic.

This example describes how to configure a BA classifier called **ba-ucast-classifier** as the default IEEE 802.1 map and apply it to ingress interface **xe-0/0/10**. The BA classifier assigns loss priorities, as shown in [Table 419 on page 5015](#), to incoming packets in the four forwarding classes.

You can use the same procedure to set multifield classifiers (except that you use firewall filter rules).

**Table 419: ba-ucast-classifier Loss Priority Assignments**

| Unicast Forwarding Class | For CoS Traffic Type                                               | ba-ucast-classifier Loss Priority to IEEE 802.1p Code Point Mapping | Packet Drop Attribute |
|--------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------|-----------------------|
| <b>be</b>                | Best-effort traffic                                                | Low loss priority code point: 000                                   | drop                  |
| <b>fcoe</b>              | Guaranteed delivery for Fibre Channel over Ethernet (FCoE) traffic | Low loss priority code point: 011                                   | no-loss               |
| <b>no-loss</b>           | Guaranteed delivery for TCP traffic                                | Low loss priority code point: 100                                   | no-loss               |
| <b>nc</b>                | Network-control traffic                                            | Low loss priority code point: 110                                   | drop                  |

### Configuring Unicast Classifiers

To configure a unicast IEEE 802.1 BA classifier named **ba-ucast-classifier** as the default IEEE 802.1 map:

1. Associate code point 000 with forwarding class **be** and loss priority **low**:  

```
[edit class-of-service classifiers]
user@switch# set ieee-802.1 ba-ucast-classifier import default forwarding-class be
loss-priority low code-points 000
```
2. Associate code point 011 with forwarding class **fcoe** and loss priority **low**:  

```
[edit class-of-service classifiers]
```



```
user@switch# set ieee-802.1 ba-ucast-classifier forwarding-class fcoe loss-priority low
code-points 011
```

3. Associate code point 100 with forwarding class **no-loss** and loss priority **low**:

```
[edit class-of-service classifiers]
user@switch# set ieee-802.1 ba-ucast-classifier forwarding-class no-loss loss-priority low
code-points 100
```

4. Associate code point 110 with forwarding class **nc** and loss priority **low**:

```
[edit class-of-service classifiers]
user@switch# set ieee-802.1 ba-ucast-classifier forwarding-class nc loss-priority low
code-points 110
```

5. Apply the unicast classifier to ingress interface **xe-0/0/10**:

```
[edit class-of-service interfaces]
user@switch# set xe-0/0/10 unit 0 classifiers ieee-802.1 ba-ucast-classifier
```

---

### Verification

To verify the unicast classifier configuration, perform these tasks:

- [Verifying the Unicast Classifier Configuration on page 5016](#)
- [Verifying the Ingress Interface Configuration on page 5016](#)

#### *Verifying the Unicast Classifier Configuration*

**Purpose** Verify that you configured the unicast classifier with the correct forwarding classes, loss priorities, and code points.

**Action** List the classifier configuration using the operational mode command **show configuration class-of-service classifiers ieee-802.1 ba-ucast-classifier**:

```
user@switch> show configuration class-of-service classifiers ieee-802.1 ba-ucast-classifier
  forwarding-class be {
    loss-priority low code-points 000;
  }
  forwarding-class fcoe {
    loss-priority low code-points 011;
  }
  forwarding-class no-loss {
    loss-priority low code-points 100;
  }
  forwarding-class nc
    loss-priority low code-points 110;
}
```

#### *Verifying the Ingress Interface Configuration*

**Purpose** Verify that the unicast classifier **ba-ucast-classifier** is attached to ingress interface **xe-0/0/10**.

**Action** List the ingress interface using the operational mode command **show configuration class-of-service interfaces xe-0/0/10**:

```
user@switch> show configuration class-of-service interfaces xe-0/0/10
congestion-notification-profile fcoe-cnp;
unit 0 {
  classifiers {
```



```

        ieee-802.1 ba-ucast-classifier;
    }
}

```

#### Related Documentation

- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Multidestination \(Multicast, Broadcast, DLF\) Classifiers on page 5017](#)
- [Defining CoS Unicast BA Classifiers on page 5133](#)
- [Monitoring CoS Classifiers on page 5265](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces on page 4851](#)

### Example: Configuring Multidestination (Multicast, Broadcast, DLF) Classifiers

Packet classification associates incoming packets with a particular CoS servicing level. Classifiers associate packets with a forwarding class and loss priority and assign packets to output queues based on the associated forwarding class.

- [Requirements on page 5017](#)
- [Overview on page 5017](#)
- [Configuring Multidestination Classifiers on page 5018](#)
- [Verification on page 5018](#)

#### Requirements

This example uses the following hardware and software components:

- A Juniper Networks QFX3500 Switch
- Junos OS Release 11.1 or later for the QFX Series

#### Overview

Junos OS supports three general types of classifiers:

- Behavior aggregate or CoS value traffic classifiers—Examine the CoS value in the packet header. The value in this single field determines the CoS settings applied to the packet. BA classifiers allow you to set the forwarding class and loss priority of a packet based on the Differentiated Services code point (DSCP) value or IEEE 802.1p value.



**NOTE:** DSCP IPv6 multidestination classifiers are not supported. IPv6 multidestination traffic uses the DSCP multidestination classifier.

- Fixed classifiers. Fixed classifiers classify all ingress traffic on a physical interface into one forwarding class, regardless of the CoS bits in the packet header.



- **Multifield traffic classifiers**—Examine multiple fields in the packet such as source and destination addresses and source and destination port numbers of the packet. With multifield classifiers, you set the forwarding class and loss priority of a packet based on firewall filter rules.

Multidestination classifiers apply to all of the switch interfaces and handle multicast, broadcast, and destination lookup fail (DLF) traffic. You cannot apply a multidestination classifier to a single interface or to a range of interfaces.



**NOTE:** You must assign unicast traffic and multicast traffic to different classifiers. One classifier cannot include both unicast and multicast forwarding classes. A multidestination classifier can include only forwarding classes for multicast traffic.

The following example describes how to configure a BA classifier called **ba-mcast-classifier**, which is applied to all of the switch interfaces. The BA classifier assigns loss priorities, as shown in [Table 420 on page 5018](#), to incoming packets in the multidestination forwarding class.

You can use the same procedure to set multifield classifiers (except that you use firewall filter rules).

**Table 420: BA-mcast-classifier Loss Priority Assignments**

| Multicast Forwarding Class | For CoS Traffic Type          | ba-mcast-classifier Assignment    |
|----------------------------|-------------------------------|-----------------------------------|
| <b>mcast</b>               | Best-effort multicast traffic | Low loss priority code point: 000 |

### Configuring Multidestination Classifiers

To configure a multicast IEEE 802.1 BA classifier named **ba-mcast-classifier**:

1. Associate code point **000** with forwarding class **mcast** and loss priority **low**:

```
[edit class-of-service classifiers]
user@switch# set ieee-802.1 ba-mcast-classifier forwarding-class mcast-be loss-priority
low code-points 000
```

2. Configure the classifier as a multidestination classifier:

```
[edit class-of-service]
user@switch# set multi-destination classifiers ieee-802.1 ba-mcast-classifier
```

### Verification

To verify the multidestination classifier configuration, perform these tasks:

- [Verifying the IEEE 802.1 Multidestination Classifier on page 5019](#)
- [Verifying the Multidestination Classifier Configuration on page 5019](#)



*Verifying the IEEE 802.1 Multidestination Classifier*

**Purpose** Verify that the classifier **ba-mcast-classifier** is configured as the IEEE 802.1 multidestination classifier:

**Action** Verify the results of the classifier configuration using the operational mode command **show configuration class-of-service multi-destination classifiers ieee-802.1**:

```
user@switch> show configuration class-of-service multi-destination classifiers ieee-802.1
ba-mcast-classifier;
```

*Verifying the Multidestination Classifier Configuration*

**Purpose** Verify that you configured the multidestination classifier with the correct forwarding classes, loss priorities, and code points.

**Action** List the classifier configuration using the operational mode command **show configuration class-of-service classifiers ieee-802.1 ba-mcast-classifier**:

```
user@switch> show configuration class-of-service classifiers ieee-802.1 ba-mcast-classifier
    forwarding-class mcast {
        loss-priority low code-points 000;
    }
```

- Related Documentation**
- [Example: Configuring Unicast Classifiers on page 5014](#)
  - [Defining CoS Multidestination \(Multicast, Broadcast, DLF\) BA Classifiers on page 5135](#)
  - [Monitoring CoS Classifiers on page 5265](#)
  - [Understanding CoS Classifiers on page 4846](#)
  - [Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces on page 4851](#)

**Example: Configuring Tail-Drop Profiles**

You can configure an interpolated weighted random early detection (WRED) tail-drop profile to control packet drop characteristics for different traffic loss priorities.



**NOTE:** You cannot enable WRED on multidestination (multicast) queues. You can enable WRED only on unicast queues.

Also, do not enable WRED on lossless traffic flows. Use priority-based flow control (PFC) to prevent packet loss on lossless forwarding classes.

- [Requirements on page 5020](#)
- [Overview on page 5020](#)
- [Configuring a Drop Profile on page 5022](#)
- [Verification on page 5022](#)



## Requirements

---

This example uses the following hardware and software components:

- A Juniper Networks QFX3500 Switch
- Junos OS Release 11.1 or later for the QFX Series

## Overview

---

You associate a tail-drop profile with a loss priority in a scheduler. When you attach the scheduler to a forwarding class (queue), you apply the interpolated drop profile to traffic of the specified loss priority in that queue. *Interpolated* means that the switch creates a smooth drop curve from a drop start point to a drop end point, with a maximum drop rate that is reached at the drop end point:

- Drop start point—Percentage of average queue fill level when the WRED algorithm starts to drop packets. Before the drop start point, no packets are scheduled to drop.
- Drop end point—Average queue fill level at which all subsequently arriving packets are dropped. When the queue fill levels falls below the drop end point, packets begin to be forwarded again. (At the drop end point, the packet drop probability becomes 100 percent.)
- Maximum drop rate—Drop probability when the average queue fill level reaches the drop end point.

You set the drop start point and the drop end point by specifying two queue fill level percentage values. The first value is the drop start point and the second value is the drop end point.


You set the maximum drop rate by specifying two drop probability percentage values. The first value is always zero (0), which is the minimum drop rate, the probability of dropping a packet at the drop start point. The second value is the maximum drop rate at the drop end point.

The drop rate is zero until the queue fill level reaches the drop start point. As the queue continues to fill, packets drop in smooth linear curve until the queue reaches the drop end point, when packets drop at the maximum drop rate. If the queue fills beyond the drop end point, all packets that match the drop profile are dropped.

[Figure 189 on page 5021](#) shows the graph for a drop profile with a drop start point of 30 percent, a drop end point of 50 percent, and a maximum drop rate of 80 percent.



Figure 189: Tail-Drop Profile Packet Drop Example

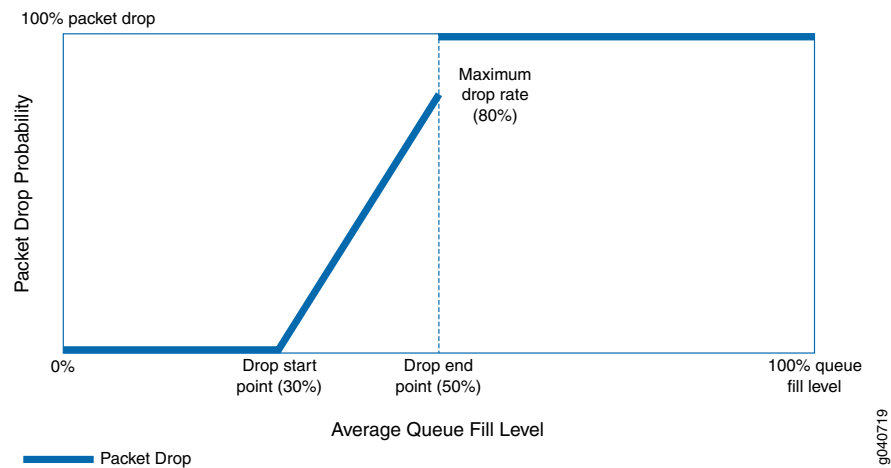

The graph shows that when the queue fill level is less than 30 percent, the packet drop rate is zero. When the queue fill level reaches 30 percent, packets begin to drop. As the queue fills, a higher percentage of packets drop. When the queue fill level reaches 50 percent, the packet drop rate has climbed to 80 percent. When the queue fill level exceeds 50 percent, all packets drop.

This example describes how to configure the drop profile shown in [Figure 189 on page 5021](#). The drop profile will have:

- The name **be-dp1**
- 30 percent for the drop start point (first **fill-level** setting)
- 50 percent for the drop end point (second **fill-level** setting)
- 0 percent for the minimum drop rate (first **drop-probability** setting)
- 80 percent for the maximum drop rate (second **drop-probability** setting)

You apply a drop profile by configuring a drop profile map that maps the drop profile to a packet loss priority and associates the drop profile and packet loss priority with a scheduler. When you associate the scheduler with a forwarding class (queue), the switch applies the drop profile to the packets in the forwarding class that have a matching packet loss priority.



### Configuring a Drop Profile

---

1. Set the drop start point at 30 percent, the drop end point at 50 percent, the minimum drop rate at 0 percent, and the maximum drop rate at 80 percent for the drop profile **be-dp1**:

```
[edit class-of-service]
user@switch# set drop-profile be-dp1 interpolate fill-level 30 fill-level 50 drop-probability
0 drop-probability 80
```

### Verification

---

#### Verifying the Drop Profile Configuration

- Purpose** Verify that you configured the drop profile **be-dp1** with the correct drop start and end points and with the correct drop rates.
- Action** Verify the results of the drop profile configuration using the operational mode command **show configuration class-of-service drop-profiles be-dp1**:
- ```
user@switch> show configuration class-of-service drop-profiles be-dp1
interpolate {
    fill-level [ 30 50 ];
    drop-probability [ 0 80 ];
}
```
- Related Documentation**
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
  - [Example: Configuring Queue Schedulers on page 5030](#)
  - [Example: Configuring Drop Profile Maps on page 5022](#)
  - [Configuring CoS Tail-Drop Profiles on page 5136](#)
  - [Understanding CoS Tail-Drop Profiles on page 4929](#)

### Example: Configuring Drop Profile Maps

A drop-profile map associates a tail-drop profile for traffic of a specified loss priority with a scheduler. When you use a scheduler map to map a scheduler to a forwarding class, the drop profile map associated with the scheduler applies the specified tail-drop profile to traffic in the forwarding class that matches the specified loss priority.

- [Requirements on page 5022](#)
- [Overview on page 5023](#)
- [Configuring a Drop Profile Map on page 5023](#)
- [Verification on page 5023](#)

### Requirements

---

This example uses the following hardware and software components:

- A Juniper Networks QFX3500 Switch
- Junos OS Release 11.1 or later for the QFX Series



## Overview

Drop profile maps enable you to configure different drop profiles for traffic of different loss priorities within the same scheduler. You can associate different drop profiles with low-priority, medium-high priority, and high-priority traffic within a single scheduler, and then map that scheduler to a forwarding class. This applies the appropriate drop profile to traffic of each loss priority in a forwarding class. Drop profile maps apply to all traffic protocols.

The following example describes how to configure a drop profile map for a scheduler named **mylan** that includes:

- A drop profile called **lp-profile** for low-priority traffic
- A drop profile called **mh-profile** for medium-high priority traffic
- A drop profile called **h-profile** for high-priority traffic

You apply the drop profiles in the drop profile map to a forwarding class by associating the scheduler **mylan** with a forwarding class in a scheduler map.

## Configuring a Drop Profile Map

1. Configure the drop profile for low-priority traffic:

```
[edit class-of-service]
user@switch# set schedulers mylan drop-profile-map loss-priority low protocol any
drop-profile lp-profile
```

2. Configure the drop profile for medium-high priority traffic:

```
[edit class-of-service]
user@switch# set schedulers mylan drop-profile-map loss-priority medium-high protocol
any drop-profile mh-profile
```

3. Configure the drop profile for high-priority traffic:

```
[edit class-of-service]
user@switch# set schedulers mylan drop-profile-map loss-priority high protocol any
drop-profile h-profile
```

## Verification

### Verifying the Drop Profile Map Configuration

**Purpose** Verify that you configured the drop profile map for the scheduler **mylan** with the correct loss priorities and drop profiles.

**Action** Verify the results of the drop profile map configuration using the operational mode command **show configuration class-of-service schedulers mylan**:

```
user@switch> show configuration class-of-service schedulers mylan
transmit-rate 3g;
shaping-rate percent 100;
priority low;
drop-profile-map loss-priority low protocol any drop-profile lp-profile;
drop-profile-map loss-priority medium-high protocol any drop-profile mh-profile;
drop-profile-map loss-priority high protocol any drop-profile h-profile;
```





NOTE: This example does not include configuring scheduler bandwidth and priority. This information (transmit rate, shaping rate, and priority) is shown for completeness.

#### Related Documentation

- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Queue Schedulers on page 5030](#)
- [Example: Configuring Tail-Drop Profiles on page 5019](#)
- [Configuring CoS Drop Profile Maps on page 5137](#)
- [Understanding CoS Tail-Drop Profiles on page 4929](#)

## Example: Configuring Forwarding Classes

Forwarding classes allow you to group packets for transmission. You assign packets to unicast or multdestination (multicast, broadcast, and destination lookup fail) output queues based on forwarding classes.

- [Requirements on page 5024](#)
- [Overview on page 5024](#)
- [Configuring Forwarding Classes on page 5026](#)
- [Verification on page 5026](#)

### Requirements

---

This example uses the following hardware and software components:

- One Juniper Networks QFX3500 Switch
- Junos OS Release 11.1 or later for the QFX Series

### Overview

---

The switch supports a total of 12 forwarding classes. In order to forward traffic, you must map (assign) the forwarding classes to unicast or multdestination output queues. The switch has 12 queues. Queues 0 through 7 are for unicast traffic, and queues 8 through 11 are for multdestination traffic. The switch supports up to two lossless forwarding classes.

By default, four categories of unicast forwarding classes and one multdestination forwarding class are defined. You can define the remaining seven forwarding classes and configure them as unicast or multdestination by mapping them to unicast or multdestination queues. The type of queue, unicast or multdestination, determines the type of forwarding class.

The four default unicast forwarding classes are:



- **be**—Best-effort traffic
- **fcoe**—Guaranteed delivery for Fibre Channel over Ethernet traffic
- **no-loss**—Guaranteed delivery for TCP no-loss traffic
- **nc**—Network control traffic

The default multidestination forwarding class is:

- **mcast**—Multidestination traffic

Map forwarding classes to queues using the **class** statement, which enables you to configure up to 12 forwarding classes. You can map more than one forwarding class to a single queue, but all forwarding classes mapped to a particular queue must be of the same type, either unicast or multicast. You cannot mix unicast and multicast forwarding classes on the same queue. The statement format is:

```
[edit class-of-service forwarding-classes]
user@switch# class class-name queue-num queue-number;
```



**NOTE:** If you are using Junos OS Release 12.2, use the default forwarding-class-to-queue mapping for the lossless **fcoe** and **no-loss** forwarding classes. If you explicitly configure the lossless forwarding classes, the traffic mapped to those forwarding classes is treated as lossy (best-effort) traffic and does *not* receive lossless treatment.

In Junos OS Release 12.3 and later, you can include the *no-loss* packet drop attribute in explicit forwarding class configurations to configure a lossless forwarding class.



**NOTE:** Junos OS Release 11.3R1 and earlier supported an alternate method of mapping forwarding classes to queues that allowed you to map only one forwarding class to a queue using the statement:

```
[edit class-of-service forwarding-classes]
user@switch# queue queue-number class-name
```

The **queue** statement has been deprecated and is no longer valid in Junos OS Release 11.3R2 and later. If you have a configuration that uses the **queue** statement to map forwarding classes to queues, edit the configuration to replace the **queue** statement with the **class** statement.





**NOTE:** The QFX Series uses hierarchical scheduling to control output queue forwarding. When you define a forwarding class that will carry traffic on the switch (the behavior aggregate classifier has a forwarding class and you expect traffic for the forwarding class), you must also define a scheduling policy for the forwarding class. Defining a scheduling policy means:

- Mapping a scheduler to the forwarding class in a scheduler map
- Including the forwarding class in a forwarding class set
- Associating the scheduler map with a traffic control profile
- Attaching the traffic control profile to a forwarding class set and an interface

Table 421 on page 5026 shows the configuration forwarding-class-to-queue mapping for this example:

**Table 421: Forwarding-Class-to-Queue Example Configuration**

Forwarding Class	Queue
best-effort	0
nc	7
mcast	8

### Configuring Forwarding Classes

To configure CoS forwarding classes, map the forwarding classes to queues:

1. Map the **best-effort** forwarding class to queue 0:

```
[edit class-of-service forwarding-classes]
user@switch# set class best-effort queue-num 0
```

2. Map the **nc** forwarding class to queue 7:

```
[edit class-of-service forwarding-classes]
user@switch# set class nc queue-num 7
```

3. Map the **mcast-be** forwarding class to queue 8:

```
[edit class-of-service forwarding-classes]
user@switch# set class mcast-be queue-num 8
```

### Verification

#### Verifying the Forwarding-Class-to-Queue Mapping

**Purpose** Verify the forwarding-class-to-queue mapping. (The system shows only the explicitly configured forwarding classes; it does not show default forwarding classes such as **fcoe** and **no-loss**.)



**Action** Verify the results of the forwarding class configuration using the operational mode command **show configuration class-of-service forwarding-classes**:

```
user@switch> show configuration class-of-service forwarding-classes
class best-effort queue-num 0;
class network-control queue-num 7;
class mcast queue-num 8;
```

**Related Documentation**

- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Defining CoS Forwarding Classes on page 5137](#)
- [Monitoring CoS Forwarding Classes on page 5266](#)
- [Overview of CoS Changes Introduced in Junos OS Release 11.3 on page 4812](#)
- [Overview of CoS Changes Introduced in Junos OS Release 12.2 on page 4820](#)
- [Understanding CoS Forwarding Classes on page 4860](#)

## Example: Configuring Forwarding Class Sets

A forwarding class set (fc-set) is a priority group for enhanced transmission selection (ETS) traffic control. Each fc-set consists of one or more forwarding classes (output queues).

ETS enables you to configure link resources (bandwidth and bandwidth sharing characteristics) for a priority group, and then allocate the priority group's resources among the forwarding classes that belong to the priority group. This is called two-tier, or hierarchical, scheduling. Traffic control profiles control the scheduling for the priority group, and schedulers control the scheduling for individual forwarding classes.

- [Requirements on page 5027](#)
- [Overview on page 5027](#)
- [Configuring Forwarding Class Sets on page 5028](#)
- [Verification on page 5029](#)

### Requirements

This example uses the following hardware and software components:

- A Juniper Networks QFX3500 Switch
- Junos OS Release 11.1 or later for the QFX Series

### Overview

You can configure up to three unicast fc-sets and one multicast fc-set. A common way to configure unicast priority groups is to configure separate fc-sets for local area network (LAN) traffic, storage area network (SAN) traffic, and high-performance computing (HPC) traffic, and then assign the appropriate forwarding classes to each fc-set.





**NOTE:** If you configure strict-high priority queues, you must create an fc-set that is dedicated only to strict-high priority traffic. Only one fc-set can contain strict-high priority queues. Queues that are not strict-high priority cannot belong to the same fc-set as strict-high priority queues. The multidestination fc-set cannot contain strict-high priority queues.

To apply ETS, you map one or more fc-sets to a physical egress port. You can map up to three forwarding class sets to each port. When you map an fc-set to a port, the port uses hierarchical scheduling to allocate port resources to the priority group (fc-set) and to allocate the priority group resources to the queues (forwarding classes) that belong to the priority group.

This example describes how to:

- Configure three fc-sets called **lan-pg**, **san-pg**, and **hpc-pg**.
- Assign forwarding classes to each of the fc-sets.
- Apply the fc-sets and their output traffic control profiles to an egress interface.

This example does not describe how to configure the forwarding classes assigned to the fc-sets or how to configure traffic control profiles. [Table 422 on page 5028](#) shows the configuration components for this example:

**Table 422: Components of the Forwarding Class Sets Configuration Example**

Component	Settings
Hardware	QFX3500 switch
LAN traffic priority group	Forwarding class set: <b>lan-pg</b> Forwarding classes: <b>best-effort-1</b> , <b>best-effort-2</b>
SAN traffic priority group	Forwarding class set: <b>san-pg</b> Forwarding classes: <b>fcoe</b> , <b>fcoe-2</b>
HPC traffic priority group	Forwarding class set: <b>hpc-pg</b> Forwarding classes: <b>nc</b> , <b>high-perf</b>
Egress interface	<b>xe-0/0/7</b>

### Configuring Forwarding Class Sets

1. Define the **lan-pg** priority group (fc-set) and assign to it the forwarding classes **best-effort-1** and **best-effort-2**:  

```
[edit class-of-service]
user@switch# set forwarding-class-sets lan-pg class best-effort-1
user@switch# set forwarding-class-sets lan-pg class best-effort-2
```
2. Define the **san-pg** priority group and assign to it the forwarding classes **fcoe** and **fcoe-2**:  

```
[edit class-of-service]
```



```

user@switch# set forwarding-class-sets san-pg class fcoe
user@switch# set forwarding-class-sets san-pg class fcoe-2

```

3. Define the **hpc-pg** priority group and assign to it the forwarding classes **nc** and **high-perf**:

```

[edit class-of-service]
user@switch# set forwarding-class-sets hpc-pg class nc
user@switch# set forwarding-class-sets hpc-pg class high-perf

```

4. Map the three forwarding class sets to an interface (the output traffic control profiles associated with the forwarding class sets determine the class of service scheduling for the priority groups):

```

[edit class-of-service]
user@switch# set interfaces xe-0/0/7 forwarding-class-set lan-pg
output-traffic-control-profile lan-tcp
user@switch# set interfaces xe-0/0/7 forwarding-class-set san-pg
output-traffic-control-profile san-tcp
user@switch# set interfaces xe-0/0/7 forwarding-class-set hpc-pg
output-traffic-control-profile hpc-tcp

```

### Verification

To verify the priority group configuration, perform these tasks:

- [Verifying Forwarding Class Set Membership on page 5029](#)
- [Verifying the Egress Interface Configuration on page 5029](#)

#### *Verifying Forwarding Class Set Membership*

**Purpose** Verify that you configured the **lan-pg**, **san-pg**, and **hpc-pg** priority groups with the correct forwarding classes.

**Action** List the forwarding class set member configuration using the operational mode command **show configuration class-of-service forwarding-class-sets**:

```

user@switch> show configuration class-of-service forwarding-class-sets
lan-pg {
    class best-effort-1;
    class best-effort-2;
}
san-pg {
    class fcoe;
    class fcoe-2;
}
hpc-pg {
    class high-perf;
    class nc;
}

```

#### *Verifying the Egress Interface Configuration*

**Purpose** Verify that egress interface **xe-0/0/7** is associated with the **lan-pg**, **san-pg**, and **hpc-pg** priority groups and with the correct output traffic control profiles.



**Action** Display the egress interface using the operational mode command **show configuration class-of-service interfaces xe-0/0/7**:

```
user@switch> show configuration class-of-service interfaces xe-0/0/7
forwarding-class-set {
  lan-pg {
    output-traffic-control-profile lan-tcp;
  }
  san-pg {
    output-traffic-control-profile san-tcp;
  }
  hpc-pg {
    output-traffic-control-profile hpc-tcp;
  }
}
```

- Related Documentation**
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
  - [Example: Configuring Queue Schedulers on page 5030](#)
  - [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)
  - [Defining CoS Forwarding Class Sets on page 5139](#)
  - [Understanding CoS Forwarding Class Sets \(Priority Groups\) on page 4865](#)

## Example: Configuring Queue Schedulers

Schedulers define the CoS properties of output queues. These properties include the amount of interface bandwidth assigned to the queue, the priority of the queue, and the tail-drop profiles associated with the queue.

- [Requirements on page 5030](#)
- [Overview on page 5030](#)
- [Configuring a CoS Scheduler on page 5033](#)
- [Verification on page 5033](#)

### Requirements

---

This example uses the following hardware and software components:

- Juniper Networks QFX3500 Switch
- Junos OS Release 11.1 or later for the QFX Series

### Overview

---

Scheduler parameters define the following characteristics for the queues mapped to the scheduler:



- **transmit-rate**—Minimum bandwidth, also known as the committed information rate (CIR). Each queue mapped to the scheduler receives a minimum of either the configured amount of absolute bandwidth or the configured percentage of bandwidth. The transmit rate also determines the amount of excess (extra) priority group bandwidth that the queue can share. Extra priority group bandwidth is allocated among the queues in the priority group in proportion to the transmit rate of each queue. You cannot configure a transmit rate for strict-high priority queues. Queues (forwarding classes) with a configured transmit rate cannot be included in a forwarding class set that has strict-high priority queues.



**NOTE:** The **transmit-rate** setting works only if you also configure the **guaranteed-rate** in the traffic control profile that is attached to the forwarding class set to which the queue belongs. If you do not configure the **guaranteed-rate**, the **transmit-rate** does not work. The sum of all queue transmit rates in a forwarding class set should not exceed the traffic control profile guaranteed rate. If you configure transmit rates whose sum exceeds the forwarding class set guaranteed rate, the commit check fails, and the system rejects the configuration.



**NOTE:** Include the preamble bytes and interframe gap bytes as well as the data bytes in your bandwidth calculations.

- **shaping-rate**—Maximum bandwidth, also known as the peak information rate (PIR). Each queue receives a maximum of the configured amount of absolute bandwidth or the configured percentage of bandwidth, even if more bandwidth is available.



**NOTE:** Include the preamble bytes and interframe gap bytes as well as the data bytes in your bandwidth calculations.

- **priority**—One of two bandwidth priorities that queues associated with a scheduler can receive:
  - **low**—The scheduler has low priority.
  - **strict-high**—The scheduler has strict-high priority. You can configure only one queue as a strict-high priority queue. Strict-high priority allocates the scheduled bandwidth to the queue before any other queue receives bandwidth. Other queues receive the bandwidth that remains after the strict-high queue has been serviced.
- **drop-profile-map**—Mapping of a drop profile to a loss priority and protocol to apply WRED to the scheduler.
- **buffer-size**—Size of the queue buffer as a percentage of the dedicated buffer space on the port, or as a proportional share of the dedicated buffer space on the port that remains after the explicitly configured queues are served.





**NOTE:** Queues might not receive the egress bandwidth configured in the queue scheduler when a port's egress queues are congested. This can occur when the ingress port buffer fills above a certain threshold. If this happens, configure a drop profile for the queue on the port that is receiving its configured bandwidth (this queue is preventing the other queues on the port from receiving their configured bandwidth). The drop profile applies a weighted random early detection (WRED) algorithm to the queue and prevents the queue from impacting the other queues on the port.

Scheduler maps associate schedulers with forwarding classes (queues). After defining schedulers and mapping them to queues in a scheduler map, to configure hardware queue scheduling (port scheduling) you:

1. Associate a scheduler map with a traffic control profile (a traffic control profile schedules resources for a group of forwarding classes, called a *forwarding class set* or *priority group*).
2. Attach a forwarding class and a traffic control profile to an interface.

You can associate up to four user-defined scheduler maps with forwarding class sets.

This process configures the hardware queues, packet schedulers, and WRED characteristics that operate according to the scheduler mapping. The traffic control profile uses the scheduler CoS properties to determine the resources that should be allocated to the individual output queues from the total resources available to the priority group.

Table 423 on page 5032 shows the configuration components for this example.

**Table 423: Components of the Queue Scheduler Configuration Example**

Component	Settings
Hardware	QFX3500 switch
Scheduler	Name: <b>be-sched</b> Transmit rate: <b>20%</b> Shaping rate: <b>40%</b> Buffer size: <b>20%</b> Priority: <b>low</b> Drop profile: <b>be-dp</b>
Scheduler map	Name: <b>be-map</b> Forwarding class to associate with the <b>be-sched</b> scheduler: <b>best-effort</b>
Traffic control profile	Name: <b>be-tcp</b>  <b>NOTE:</b> This topic does not describe how to define a traffic control profile.
Forwarding class set	Name: <b>lan-pg</b>



## Configuring a CoS Scheduler

To configure a CoS scheduler using the CLI:

1. Create a scheduler (**be-sched**) with a minimum guaranteed bandwidth of 2 Gbps, a maximum bandwidth of 4 Gbps, low priority, and map it to the drop profile **be-dp**:

```
[edit class-of-service schedulers]
user@switch# set be-sched transmit-rate percent 20
user@switch# set be-sched shaping-rate percent 40
user@switch# set be-sched buffer-size percent 20
user@switch# set be-sched priority low
user@switch# set be-sched drop-profile-map loss-priority low protocol any drop-profile
be-dp
```

2. Configure a scheduler map (**be-map**) that associates the scheduler (**be-sched**) with the forwarding class (**best-effort**):

```
[edit class-of-service scheduler-maps]
user@switch# set be-map forwarding-class best-effort scheduler be-sched
```

3. Associate the scheduler map **be-map** with a traffic control profile (**be-tcp**):

```
[edit class-of-service traffic-control-profiles]
user@switch# set be-tcp scheduler-map be-map
```

4. Associate the traffic control profile **be-tcp** with a forwarding class set (**lan-pg**) and a 10-Gigabit Ethernet interface (**xe-0/0/7**):

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/7 forwarding-class-set lan-pg
output-traffic-control-profile be-tcp
```

5. Alternatively, you can assign the scheduler map (**be-map**) to all the 10-Gigabit Ethernet interfaces using wildcards (**xe-\***):

```
[edit class-of-service interfaces]
user@switch# set xe-* forwarding-class-set lan-pg output-traffic-control-profile be-tcp
```

## Verification

To verify that the queue scheduler has been created and is mapped to the correct interfaces, perform these tasks:

- [Verifying the Scheduler Configuration on page 5033](#)
- [Verifying the Scheduler Map Configuration on page 5034](#)
- [Verifying That the Scheduler Is Associated with the Interface on page 5034](#)

### Verifying the Scheduler Configuration

**Purpose** Verify that the queue scheduler **be-sched** has been created with a minimum guaranteed bandwidth of 2 Gbps, a maximum bandwidth of 4 Gbps, the priority set to **low**, and the drop profile **be-dp**.

**Action** Display the scheduler using the operational mode command **show configuration class-of-service schedulers be-sched**:

```
user@switch> show configuration class-of-service schedulers be-sched
```



```
transmit-rate percent 20;
shaping-rate percent 40;
buffer-size percent 20
priority low;
drop-profile-map loss-priority low protocol any drop-profile be-dp;
```

#### *Verifying the Scheduler Map Configuration*

**Purpose** Verify that the scheduler map **be-map** has been created and associates the forwarding class **best-effort** with the scheduler **be-sched**, and also that the scheduler map is attached to the traffic control profile **be-tcp**.

**Action** Display the scheduler map using the operational mode command **show configuration class-of-service scheduler-maps be-map**:

```
user@switch> show configuration class-of-service scheduler-maps be-map
forwarding-class best-effort scheduler be-sched;
```

Display the traffic control profile to verify that the scheduler map **be-map** is attached using the operational mode command **show configuration class-of-service traffic-control-profiles be-tcp scheduler-map**:

```
user@switch> show configuration class-of-service traffic-control-profiles be-tcp scheduler-map
scheduler-map be-map;
```



**NOTE:** This topic does not describe how to configure a traffic control profile or its allocation of port bandwidth. Using a traffic control profile to configure the port resource allocation to the priority group is necessary to implement hierarchical scheduling.

#### *Verifying That the Scheduler Is Associated with the Interface*

**Purpose** Verify that the forwarding class set (**lan-pg**) and the traffic control profile (**be-tcp**) that are associated with the queue scheduler are attached to the interface **xe-0/0/7**.

**Action** List the interface using the operational mode command **show configuration class-of-service interfaces xe-0/0/7**:

```
user@switch> show configuration class-of-service interfaces xe-0/0/7
forwarding-class-set {
  lan-pg {
    output-traffic-control-profile be-tcp;
  }
}
```

#### **Related Documentation**

- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Minimum Guaranteed Output Bandwidth on page 5040](#)
- [Example: Configuring Maximum Output Bandwidth on page 5044](#)
- [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)



- [Example: Configuring Tail-Drop Profiles on page 5019](#)
- [Defining CoS Queue Schedulers on page 5139](#)
- [Monitoring CoS Scheduler Maps on page 5269](#)
- [Understanding CoS Output Queue Schedulers on page 4876](#)
- [Understanding CoS Hierarchical Port Scheduling \(ETS\) on page 4872](#)
- [Understanding CoS Buffer Configuration on page 4914](#)

## Example: Configuring Queue Scheduling Priority

You can configure the bandwidth scheduling priority of individual queues by specifying the priority in a scheduler, and then using a scheduler map to associate the scheduler with a queue.

- [Requirements on page 5035](#)
- [Overview on page 5035](#)
- [Configuring Queue Scheduling Priority on page 5036](#)
- [Verification on page 5036](#)

### Requirements

This example uses the following hardware and software components:

- A Juniper Networks QFX3500 Switch
- Junos OS Release 11.1 or later for the QFX Series

### Overview

Queues can have one of two bandwidth priorities:

- **strict-high**—You can configure only one queue as a strict-high or high-priority queue. Strict-high priority allocates the scheduled bandwidth to the queue before any other queue receives bandwidth. Other queues receive the bandwidth that remains after the strict-high queue has been serviced.



**NOTE:** If you configure strict-high priority queues, you must create an fc-set that is dedicated only to strict-high priority traffic. Only one fc-set can contain strict-high priority queues. Queues that are not strict-high priority cannot belong to the same fc-set as strict-high priority queues. The multidestination fc-set cannot contain strict-high priority queues.

- **low**—Low priority. Traffic with this priority is serviced after any queue that has a **strict-high** priority.

[Table 424 on page 5036](#) shows the configuration components for this example.



This example describes how to set the queue priority for two forwarding classes (queues) named **fcoe** and **no-loss**. Both queues have a priority of **low**. The scheduler for the **fcoe** queue is named **fcoe-sched** and the scheduler for the **no-loss** queue is named **nl-sched**. One scheduler map, **schedmap1**, associates the schedulers to the queues.

**Table 424: Components of the Queue Scheduler Priority Configuration Example**

Component	Settings
Hardware	QFX3500 switch
Schedulers	<b>fcoe-sched</b> for FCoE traffic <b>nl-sched</b> for no-loss traffic
Priority	<b>low</b> for FCoE traffic <b>low</b> for no-loss traffic
Scheduler map	<b>schedmap1</b> : FCoE mapping: scheduler <b>fcoe-sched</b> to forwarding class <b>fcoe</b> No-loss mapping: scheduler <b>nl-sched</b> to forwarding class <b>no-loss</b>

### Configuring Queue Scheduling Priority

To configure queue priority using the CLI:

- Create the FCoE scheduler with **low** priority:  

```
[edit class-of-service]
user@switch# set schedulers fcoe-sched priority low
```
- Create the no-loss scheduler with **low** priority:  

```
[edit class-of-service]
user@switch# set schedulers nl-sched priority low
```
- Associate the schedulers with the desired queues in the scheduler map:  

```
[edit class-of-service]
user@switch# set scheduler-maps schedmap1 forwarding-class fcoe scheduler fcoe-sched
user@switch# set scheduler-maps schedmap1 forwarding-class no-loss scheduler nl-sched
```

### Verification

To verify that you configured the queue scheduling priority for bandwidth and mapped the schedulers to the correct forwarding classes, perform these tasks:

- [Verifying the Queue Scheduling Priority on page 5036](#)
- [Verifying the Scheduler-to-Forwarding-Class Mapping on page 5037](#)

#### Verifying the Queue Scheduling Priority

**Purpose** Verify that you configured the queue schedulers **fcoe-sched** and **nl-sched** with **low** queue scheduling priority.



**Action** Display the **fcoe-sched** scheduler priority configuration using the operational mode command **show configuration class-of-service schedulers fcoe-sched priority**:

```
user@switch> show configuration class-of-service schedulers fcoe-sched priority
priority low;
```

Display the **nl-sched** scheduler priority configuration using the operational mode command **show configuration class-of-service schedulers nl-sched priority**:

```
user@switch> show configuration class-of-service schedulers nl-sched priority
priority low;
```

#### *Verifying the Scheduler-to-Forwarding-Class Mapping*

**Purpose** Verify that you configured the scheduler map **schedmap1** to map scheduler **fcoe-sched** to forwarding class **fcoe** and schedule **nl-sched** to forwarding class **no-loss**.

**Action** Display the scheduler map **schedmap1** using the operational mode command **show configuration class-of-service scheduler-maps schedmap1**:

```
user@switch> show configuration class-of-service scheduler-maps schedmap1
forwarding-class fcoe scheduler fcoe-sched;
forwarding-class no-loss scheduler nl-sched;
```

#### **Related Documentation**

- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Queue Schedulers on page 5030](#)
- [Defining CoS Queue Scheduling Priority on page 5142](#)
- [Monitoring CoS Scheduler Maps on page 5269](#)
- [Understanding CoS Output Queue Schedulers on page 4876](#)

### **Example: Configuring Traffic Control Profiles (Priority Group Scheduling)**

A traffic control profile defines the output bandwidth and scheduling characteristics of forwarding class sets (priority groups). The forwarding classes (queues) mapped to a forwarding class set share the bandwidth resources that you configure in the traffic control profile. A scheduler map associates forwarding classes with schedulers to define how the individual queues in a forwarding class set share the bandwidth allocated to that forwarding class set.

- [Requirements on page 5037](#)
- [Overview on page 5038](#)
- [Configuring a Traffic Control Profile on page 5039](#)
- [Verification on page 5039](#)

#### **Requirements**

This example uses the following hardware and software components:

- A Juniper Networks QFX3500 Switch



- Junos OS Release 11.1 or later for the QFX Series

## Overview

---

The parameters you configure in a traffic control profile define the following characteristics for the priority group:

- **guaranteed-rate**—Minimum bandwidth, also known as the committed information rate (CIR). Each priority group receives a minimum of either the configured amount of absolute bandwidth or the configured percentage of bandwidth. The guaranteed rate also determines the amount of excess (extra) port bandwidth that the priority group can share. Extra port bandwidth is allocated among the priority groups on a port in proportion to the guaranteed rate of each priority group.



**NOTE:** In order for the **transmit-rate** option (minimum bandwidth for a queue that you set using scheduler configuration) to work properly, you must configure the **guaranteed-rate** for the priority group. If a priority group does not have a guaranteed minimum bandwidth, the queues (forwarding classes) that belong to the priority group cannot have a guaranteed minimum bandwidth.



**NOTE:** Include the preamble bytes and interframe gap bytes as well as the data bytes in your bandwidth calculations.

- **shaping-rate**—Maximum bandwidth, also known as the peak information rate (PIR). Each priority group receives a maximum of the configured amount of absolute bandwidth or the configured percentage of bandwidth, even if more bandwidth is available.



**NOTE:** Include the preamble bytes and interframe gap bytes as well as the data bytes in your bandwidth calculations.

- **scheduler-map**—Bandwidth and scheduling characteristics for the queues, defined by mapping forwarding classes to schedulers. (The queue scheduling characteristics represent amounts or percentages of the priority group bandwidth, not the amounts or percentages of total link bandwidth.)





**NOTE:** Because a port can have more than one priority group, when you assign resources to a priority group, keep in mind that the total port bandwidth must serve all of the queues associated with that port.

For example, if you map three priority groups to a 10-Gigabit Ethernet port, the queues associated with all three of the priority groups share the 10-Gbps bandwidth as defined by the traffic control profiles. Therefore, the total combined guaranteed-rate value of the three priority groups should not exceed 10 Gbps. If you configure guaranteed rates whose sum exceeds the port bandwidth, the system sends a syslog message to notify you that the configuration is not valid. However, the system does not perform a commit check. If you commit a configuration in which the sum of the guaranteed rates exceeds the port bandwidth, the hierarchical scheduler behaves unpredictably.

The sum of the queue (forwarding class) transmit rates cannot exceed the total guaranteed-rate of the priority group to which the queues belong. If you configure transmit rates whose sum exceeds the priority group guaranteed rate, the commit check fails and the system rejects the configuration.

If you configure the guaranteed-rate of a priority group as a percentage, configure all of the transmit rates associated with that priority group as percentages. In this case, if any of the transmit rates are configured as absolute values instead of percentages, the configuration is not valid and the system sends a syslog message.

### Configuring a Traffic Control Profile

This example describes how to configure a traffic control profile named **san-tcp** with a scheduler map named **san-map1** and allocate to it a minimum bandwidth of 4 Gbps and a maximum bandwidth of 8 Gbps:

1. Create the traffic control profile and set the **guaranteed-rate** (minimum guaranteed bandwidth) to **4g**:

```
[edit class-of-service]
user@switch# set traffic-control-profiles san-tcp guaranteed-rate 4g
```

2. Set the **shaping-rate** (maximum guaranteed bandwidth) to **8g**:

```
[edit class-of-service]
user@switch# set traffic-control-profiles san-tcp shaping-rate 8g
```

3. Associate the scheduler map **san-map1** with the traffic control profile:

```
[edit class-of-service]
user@switch# set traffic-control-profiles san-tcp scheduler-map san-map1
```

### Verification

#### Verifying the Traffic Control Profile Configuration

**Purpose** Verify that the traffic control profile **san-tcp** has been created with a minimum guaranteed bandwidth of 4 Gbps, a maximum bandwidth of 8 Gbps, and the scheduler map **san-map1**.



**Action** List the traffic control profile using the operational mode command **show configuration class-of-service traffic-control-profiles san-tcp**:

```
user@switch> show configuration class-of-service traffic-control-profiles san-tcp
scheduler-map san-map1;
shaping-rate percent 8g;
guaranteed-rate 4g;
```

**Related Documentation**

- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Minimum Guaranteed Output Bandwidth on page 5040](#)
- [Example: Configuring Maximum Output Bandwidth on page 5044](#)
- [Example: Configuring Queue Schedulers on page 5030](#)
- [Defining CoS Traffic Control Profiles \(Priority Group Scheduling\) on page 5143](#)
- [Understanding CoS Traffic Control Profiles on page 4886](#)
- [Understanding CoS Hierarchical Port Scheduling \(ETS\) on page 4872](#)

## Example: Configuring Minimum Guaranteed Output Bandwidth

Scheduling the minimum guaranteed output bandwidth for a queue (forwarding class) requires configuring both tiers of the two-tier hierarchical scheduler. One tier is scheduling the resources for the individual queue. The other tier is scheduling the resources for the priority group (forwarding class set) to which the queue belongs.

- [Requirements on page 5040](#)
- [Overview on page 5040](#)
- [Configuring Guaranteed Minimum Bandwidth on page 5042](#)
- [Verification on page 5043](#)

### Requirements

---

This example uses the following hardware and software components:

- A Juniper Networks QFX3500 Switch
- Junos OS Release 11.1 or later for the QFX Series

### Overview

---

The priority group minimum guaranteed bandwidth defines the minimum total amount of bandwidth available for all of the queues in the priority group to meet their minimum bandwidth requirements.

The **transmit-rate** setting in the scheduler configuration determines the minimum guaranteed bandwidth for an individual queue. The transmit rate also determines the amount of excess (extra) priority group bandwidth that the queue can share. Extra priority group bandwidth is allocated among the queues in the priority group in proportion to the transmit rate of each queue.



The **guaranteed-rate** setting in the traffic control profile configuration determines the minimum guaranteed bandwidth for a priority group. The guaranteed rate also determines the amount of excess (extra) port bandwidth that the priority group can share. Extra port bandwidth is allocated among the priority groups on a port in proportion to the guaranteed rate of each priority group.



**NOTE:** You must configure both the **transmit-rate** value for the queue and the **guaranteed-rate** value for the priority group in order to set a valid minimum bandwidth guarantee for a queue. (If the priority group does not have a guaranteed minimum bandwidth, there is no guaranteed bandwidth pool from which the queue can take its guaranteed minimum bandwidth.)

The sum of the queue transmit rates in a priority group should not exceed the guaranteed rate for the priority group. (You cannot guarantee a minimum bandwidth for the queues that is greater than the minimum bandwidth guaranteed for the entire set of queues.)



**NOTE:** When you configure bandwidth for a queue or a priority group, the switch considers only the data as the configured bandwidth. The switch does not account for the bandwidth consumed by the preamble and the interframe gap (IFG). Therefore, when you calculate and configure the bandwidth requirements for a queue or for a priority group, consider the preamble and the IFG as well as the data in the calculations.



**NOTE:** You cannot configure minimum guaranteed bandwidth on strict-high priority queues or on a priority group that contains strict-high priority queues.

This example describes how to:

- Configure a transmit rate (minimum guaranteed queue bandwidth) of 2 Gbps for queues in a scheduler named **be-sched**.
- Configure a guaranteed rate (minimum guaranteed priority group bandwidth) of 4 Gbps for a priority group in a traffic control profile named **be-tcp**.
- Assign the scheduler to a queue named **best-effort** by using a scheduler map named **be-map**.
- Associate the scheduler map **be-map** with the traffic control profile **be-tcp**.
- Assign the queue **best-effort** to a priority group named **be-pg**.
- Assign the priority group and the minimum guaranteed bandwidth scheduling to the egress interface **xe-0/0/7**.

Table 425 on page 5042 shows the configuration components for this example:



Table 425: Components of the Minimum Guaranteed Output Bandwidth Configuration Example

Component	Settings
Hardware	QFX3500 switch
Minimum guaranteed queue bandwidth	Transmit rate: 2g
Minimum guaranteed priority group bandwidth	Guaranteed rate: 4g
Scheduler	be-sched
Scheduler map	be-map
Traffic control profile	be-tcp
Forwarding class set (priority group)	be-pg
Queue (forwarding class)	best-effort
Egress interface	xe-0/0/7

### Configuring Guaranteed Minimum Bandwidth

To configure the minimum guaranteed bandwidth hierarchical scheduling for a queue and a priority group:

1. Configure the minimum guaranteed queue bandwidth of 2 Gbps for scheduler **be-sched**:

```
[edit class-of-service schedulers]
user@switch# set be-sched transmit-rate 2g
```

2. Configure the minimum guaranteed priority group bandwidth of 4 Gbps for traffic control profile **be-tcp**:

```
[edit class-of-service traffic-control-profiles]
user@switch# set be-tcp guaranteed-rate 4g
```

3. Associate the scheduler **be-sched** with the **best-effort** queue in the scheduler map **be-map**:

```
[edit class-of-service scheduler-maps]
user@switch# set be-map forwarding-class best-effort scheduler be-sched
```

4. Associate the scheduler map with the traffic control profile:

```
[edit class-of-service traffic-control-profiles]
user@switch# set be-tcp scheduler-map be-map
```

5. Assign the **best-effort** queue to the priority group **be-pg**:

```
[edit class-of-service forwarding-class-sets]
user@switch# set be-pg class best-effort
```

6. Apply the configuration to interface **xe-0/0/7**:

```
[edit class-of-service interfaces]
user@switch# set xe-0/0/7 forwarding-class-set be-pg output-traffic-control-profile be-tcp
```



## Verification

To verify the minimum guaranteed output bandwidth configuration, perform these tasks:

- [Verifying the Minimum Guaranteed Queue Bandwidth on page 5043](#)
- [Verifying the Priority Group Minimum Guaranteed Bandwidth and Scheduler Map Association on page 5043](#)
- [Verifying the Scheduler Map Configuration on page 5043](#)
- [Verifying Queue \(Forwarding Class\) Membership in the Priority Group on page 5044](#)
- [Verifying the Egress Interface Configuration on page 5044](#)

### *Verifying the Minimum Guaranteed Queue Bandwidth*

**Purpose** Verify that you configured the minimum guaranteed queue bandwidth as **2g** in the scheduler **be-sched**.

**Action** Display the minimum guaranteed bandwidth in the **be-sched** scheduler configuration using the operational mode command **show configuration class-of-service schedulers be-sched transmit-rate**:

```
user@switch> show configuration class-of-service schedulers be-sched transmit-rate
2g;
```

### *Verifying the Priority Group Minimum Guaranteed Bandwidth and Scheduler Map Association*

**Purpose** Verify that the minimum guaranteed priority group bandwidth is **4g** and the attached scheduler map is **be-map** in the traffic control profile **be-tcp**.

**Action** Display the minimum guaranteed bandwidth in the **be-tcp** traffic control profile configuration using the operational mode command **show configuration class-of-service traffic-control-profiles be-tcp guaranteed-rate**:

```
user@switch> show configuration class-of-service traffic-control-profiles be-tcp guaranteed-rate
4g;
```

Display the scheduler map in the **be-tcp** traffic control profile configuration using the operational mode command **show configuration class-of-service traffic-control-profiles be-tcp scheduler-map**:

```
user@switch> show configuration class-of-service traffic-control-profiles be-tcp scheduler-map
scheduler-map be-map;
```

### *Verifying the Scheduler Map Configuration*

**Purpose** Verify that the scheduler map **be-map** maps the forwarding class **best-effort** to the scheduler **be-sched**.

**Action** Display the **be-map** scheduler map configuration using the operational mode command **show configuration class-of-service schedulers maps be-map**:

```
user@switch> show configuration class-of-service scheduler-maps be-map
```



```
forwarding-class best-effort scheduler be-sched;
```

#### *Verifying Queue (Forwarding Class) Membership in the Priority Group*

- Purpose** Verify that the forwarding class set **be-pg** includes the forwarding class **best-effort**.
- Action** Display the **be-pg** forwarding class set configuration using the operational mode command **show configuration class-of-service forwarding-class-sets be-pg**:
- ```
user@switch> show configuration class-of-service forwarding-class-sets be-pg
class best-effort;
```

#### *Verifying the Egress Interface Configuration*

- Purpose** Verify that the forwarding class set **be-pg** and the traffic control profile **be-tcp** are attached to egress interface **xe-0/0/7**.
- Action** Display the egress interface using the operational mode command **show configuration class-of-service interfaces xe-0/0/7**:
- ```
user@switch> show configuration class-of-service interfaces xe-0/0/7
forwarding-class-set {
    be-pg {
        output-traffic-control-profile be-tcp;
    }
}
```

- Related Documentation**
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
  - [Example: Configuring Queue Schedulers on page 5030](#)
  - [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)
  - [Example: Configuring Queue Scheduling Priority on page 5035](#)
  - [Example: Configuring Forwarding Class Sets on page 5027](#)
  - [Understanding CoS Traffic Control Profiles on page 4886](#)
  - [Understanding CoS Hierarchical Port Scheduling \(ETS\) on page 4872](#)

## Example: Configuring Maximum Output Bandwidth

Scheduling the maximum output bandwidth for a queue (forwarding class) requires configuring both tiers of the hierarchical scheduler. One tier is scheduling the resources for the individual queue. The other tier is scheduling the resources for the priority group (forwarding class set) to which the queue belongs.

- [Requirements on page 5045](#)
- [Overview on page 5045](#)
- [Configuring Maximum Bandwidth on page 5046](#)
- [Verification on page 5047](#)



## Requirements

This example uses the following hardware and software components:

- A Juniper Networks QFX3500 Switch
- Junos OS Release 11.1 or later for the QFX Series

## Overview

The priority group maximum bandwidth defines the maximum total amount of bandwidth available for all of the queues in the priority group.

The **shaping-rate** setting in the scheduler configuration determines the maximum bandwidth for an individual queue.

The **shaping-rate** setting in the traffic control profile configuration determines the maximum bandwidth for a priority group.



**NOTE:** When you configure bandwidth for a queue or a priority group, the switch considers only the data as the configured bandwidth. The switch does not account for the bandwidth consumed by the preamble and the interframe gap (IFG). Therefore, when you calculate and configure the bandwidth requirements for a queue or for a priority group, consider the preamble and the IFG as well as the data in the calculations.



**NOTE:** When you set the maximum bandwidth (**shaping-rate**) for a queue or for a priority group at 100 Kbps or less, the traffic shaping behavior is accurate only within +/- 20 percent of the configured **shaping-rate** value.

This example describes how to:

- Configure a maximum rate of 4 Gbps for queues in a scheduler named **be-sched**.
- Configure a maximum rate of 6 Gbps for a priority group in a traffic control profile named **be-tcp**.
- Assign the scheduler to a queue named **best-effort** by using a scheduler map named **be-map**.
- Associate the scheduler map **be-map** with the traffic control profile **be-tcp**.
- Assign the queue **best-effort** to a priority group named **be-pg**.
- Assign the priority group and the bandwidth scheduling to the interface **xe-0/0/7**.

Table 426 on page 5046 shows the configuration components for this example:



Table 426: Components of the Maximum Output Bandwidth Configuration Example

Component	Settings
Hardware	QFX3500 switch
Maximum queue bandwidth	Shaping rate: <b>4g</b>
Maximum priority group bandwidth	Shaping rate: <b>6g</b>
Scheduler	<b>be-sched</b>
Scheduler map	<b>be-map</b>
Traffic control profile	<b>be-tcp</b>
Forwarding class set (priority group)	<b>be-pg</b>
Queue (forwarding class)	<b>best-effort</b>
Egress interface	<b>xe-0/0/7</b>

### Configuring Maximum Bandwidth

To configure the maximum bandwidth hierarchical scheduling for a queue and a priority group:

1. Configure the maximum queue bandwidth of 4 Gbps for scheduler **be-sched**:  

```
[edit class-of-service schedulers]
user@switch# set be-sched shaping-rate 4g
```
2. Configure the maximum priority group bandwidth of 6 Gbps for traffic control profile **be-tcp**:  

```
[edit class-of-service traffic-control-profiles]
user@switch# set be-tcp shaping-rate 6g
```
3. Associate the scheduler **be-sched** with the **best-effort** queue in the scheduler map **be-map**:  

```
[edit class-of-service scheduler-maps]
user@switch# set be-map forwarding-class best-effort scheduler be-sched
```
4. Associate the scheduler map with the traffic control profile:  

```
[edit class-of-service traffic-control-profiles]
user@switch# set be-tcp scheduler-map be-map
```
5. Assign the **best-effort** queue to the priority group **be-pg**:  

```
[edit class-of-service forwarding-class-sets]
user@switch# set be-pg class best-effort
```
6. Apply the configuration to interface **xe-0/0/7**:  

```
[edit class-of-service interfaces]
user@switch# set xe-0/0/7 forwarding-class-set be-pg output-traffic-control-profile be-tcp
```



## Verification

To verify the maximum output bandwidth configuration, perform these tasks:

- [Verifying the Maximum Queue Bandwidth on page 5047](#)
- [Verifying the Priority Group Maximum Bandwidth and Scheduler Map Association on page 5047](#)
- [Verifying the Scheduler Map Configuration on page 5047](#)
- [Verifying Queue \(Forwarding Class\) Membership in the Priority Group on page 5048](#)
- [Verifying the Egress Interface Configuration on page 5048](#)

### *Verifying the Maximum Queue Bandwidth*

**Purpose** Verify that you configured the maximum queue bandwidth as **4g** in the scheduler **be-sched**.

**Action** List the maximum bandwidth in the **be-sched** scheduler configuration using the operational mode command **show configuration class-of-service schedulers be-sched shaping-rate**:

```
user@switch> show configuration class-of-service schedulers be-sched shaping-rate
4g;
```

### *Verifying the Priority Group Maximum Bandwidth and Scheduler Map Association*

**Purpose** Verify that the maximum priority group bandwidth is **6g** and the attached scheduler map is **be-map** in the traffic control profile **be-tcp**.

**Action** List the maximum bandwidth in the **be-tcp** traffic control profile configuration using the operational mode command **show configuration class-of-service traffic-control-profiles be-tcp shaping-rate**:

```
user@switch> show configuration class-of-service traffic-control-profiles be-tcp shaping-rate
4g;
```

List the scheduler map in the **be-tcp** traffic control profile configuration using the operational mode command **show configuration class-of-service traffic-control-profiles be-tcp scheduler-map**:

```
user@switch> show configuration class-of-service traffic-control-profiles be-tcp scheduler-map
scheduler-map be-map;
```

### *Verifying the Scheduler Map Configuration*

**Purpose** Verify that the scheduler map **be-map** maps the forwarding class **best-effort** to the scheduler **be-sched**.

**Action** List the **be-map** scheduler map configuration using the operational mode command **show configuration class-of-service scheduler-maps be-map**:

```
user@switch> show configuration class-of-service scheduler-maps be-map
forwarding-class best-effort scheduler be-sched;
```



***Verifying Queue (Forwarding Class) Membership in the Priority Group***

**Purpose** Verify that the forwarding class set **be-pg** includes the forwarding class **best-effort**.

**Action** List the **be-pg** forwarding class set configuration using the operational mode command **show configuration class-of-service forwarding-class-sets be-pg**:

```
user@switch> show configuration class-of-service forwarding-class-sets be-pg
class best-effort;
```

***Verifying the Egress Interface Configuration***

**Purpose** Verify that the forwarding class set **be-pg** and the traffic control profile **be-tcp** are attached to egress interface **xe-0/0/7**.

**Action** List the egress interface using the operational mode command **show configuration class-of-service interfaces xe-0/0/7**:

```
user@switch> show configuration class-of-service interfaces xe-0/0/7
forwarding-class-set {
    be-pg {
        output-traffic-control-profile be-tcp;
    }
}
```

- Related Documentation**
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
  - [Example: Configuring Queue Schedulers on page 5030](#)
  - [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)
  - [Example: Configuring Forwarding Class Sets on page 5027](#)
  - [Understanding CoS Traffic Control Profiles on page 4886](#)
  - [Understanding CoS Hierarchical Port Scheduling \(ETS\) on page 4872](#)

**Example: Configuring Lossless FCoE Traffic When the Converged Ethernet Network Does Not Use IEEE 802.1p Priority 3 for FCoE Traffic (FCoE Transit Switch)**

The default system configuration supports FCoE traffic on priority 3 (IEEE 802.1p code point 011). If the FCoE traffic on your converged Ethernet network uses priority 3, the only user configuration required for lossless transport is to enable PFC on code point 011 on the FCoE ingress interfaces.

However, if your network uses a different priority than 3 for FCoE traffic, you need to configure lossless FCoE transport on that priority. This example shows you how to configure lossless FCoE transport on a converged Ethernet network that uses priority 5 (IEEE 802.1p code point 101) for FCoE traffic instead of using priority 3.

- [Requirements on page 5049](#)
- [Overview on page 5049](#)



- [Configuration on page 5051](#)
- [Verification on page 5052](#)

---

## Requirements

This example uses the following hardware and software components:

- One Juniper Networks QFX3500 Switch in transit switch (FIP snooping) mode
- Junos OS Release 12.3 or later for the QFX Series

---

## Overview

Although FCoE traffic typically uses IEEE 802.1p priority 3 on converged Ethernet networks, some networks use a different priority for FCoE traffic. Regardless of the priority used, FCoE traffic must receive lossless treatment. Supporting lossless behavior for FCoE traffic when your network does not use priority 3 requires configuring:

- A lossless forwarding class for FCoE traffic.
- A behavior aggregate (BA) classifier to map the FCoE forwarding class to the appropriate IEEE 802.1p priority.
- A congestion notification profile (CNP) to enable PFC on the FCoE code point at the interface ingress and to configure flow control on the interface egress. Flow control on the interface egress enables the interface to respond to PFC messages received from the connected peer and pause the correct IEEE 802.1p priority on the correct output queue.
- A DCBX application and an application map to support DCBX application TLV exchange for the lossless FCoE traffic on the configured FCoE priority. By default, DCBX is enabled on all Ethernet interfaces, but only on priority 3 (IEEE 802.1p code point 011). To support DCBX application TLV exchange when you are not using the default configuration, you must configure all of the applications and map them to interfaces and priorities.

The priorities specified in the BA classifiers, CNP, and DCBX application map must match, or the configuration does not work. You must specify the same lossless FCoE forwarding class in each configuration and use the same IEEE 802.1p code point (priority) so that the FCoE traffic is properly classified into flows and so that those flows receive lossless treatment.

## Topology

This example shows how to configure one lossless FCoE traffic class, map it to a priority other than priority 3, and configure flow control to ensure lossless behavior on the interfaces. This example uses two Ethernet interfaces, xe-0/0/25 and xe-0/0/26. The interfaces connect to a converged Ethernet network that uses IEEE 802.1p priority 5 (code point 101) for FCoE traffic.

The configuration on the two interfaces is the same. Both interfaces use the same explicitly configured lossless FCoE forwarding class and the same ingress classifier. Both interfaces enable PFC on priority 5 and enable flow control on the same output queue (which is mapped to the lossless FCoE forwarding class).



Table 427 on page 5050 shows the configuration components for this example.

**Table 427: Components of the Configuration Topology for FCoE Traffic That Does Not Use Priority 3**

Component	Settings
Hardware	QFX3500 switch
Forwarding class	<p>Name—<b>fcoe1</b></p> <p>Queue mapping—<b>queue 5</b></p> <p>Packet drop attribute—<b>no-loss</b></p> <p><b>NOTE:</b> A lossless forwarding class can be mapped to any output queue. However, because the <b>fcoe1</b> forwarding class uses priority 5 in this example, matching that traffic to a forwarding class that uses queue 5 creates a configuration that is logical and easy to map because the priority and the queue are identified by the same number.</p>
BA classifier	<p>Name—<b>fcoe_p5</b></p> <p>FCoE priority mapping—Forwarding class <b>fcoe1</b> mapped to code point <b>101</b> (IEEE 802.1p priority 5) and a packet loss priority of <b>low</b>.</p>
PFC configuration (CNPs)	<p>CNP name—<b>fcoe_p5_cnp</b></p> <p>Input CNP code point—<b>101</b></p> <p>MRU—<b>2240</b> bytes</p> <p>Cable length—<b>100</b> meters</p> <p>Output CNP code point—<b>101</b></p> <p>Output CNP flow control queue—<b>5</b></p> <p><b>NOTE:</b> When you apply a CNP with an explicit output queue flow control configuration to an interface, the explicit CNP overwrites the default output CNP. The output queues that are enabled for pause in the default configuration (queues 3 and 4) are not enabled for pause unless they are included in the explicitly configured output CNP.</p>
DCBX application mapping	<p>Application name—<b>fcoe_p5_app</b></p> <p>Application EtherType—<b>0x8906</b></p> <p>Application map name—<b>fcoe_p5_app_map</b></p> <p>Application map code points—<b>101</b></p> <p><b>NOTE:</b> LLDP and DCBX must be enabled on the interface. By default, LLDP and DCBX are enabled on all Ethernet interfaces.</p>





**NOTE:** This example does not include scheduling (bandwidth allocation) configuration or the FIP snooping configuration. This examples focuses only on the lossless FCoE priority configuration.

### Configuration

#### CLI Quick Configuration

To quickly configure a lossless FCoE forwarding class that uses a different priority than IEEE 802.1p priority 3 for FCoE traffic on an FCoE transit switch, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set class-of-service forwarding-classes class fcoe1 queue-num 5 no-loss
set class-of-service classifiers ieee-802.1 fcoe_p5 forwarding-class fcoe1 loss-priority low
code-points 101
set class-of-service interfaces xe-0/0/25 unit 0 classifiers ieee-802.1 fcoe_p5
set class-of-service interfaces xe-0/0/26 unit 0 classifiers ieee-802.1 fcoe_p5
set class-of-service congestion-notification-profile fcoe_p5_cnp input ieee-802.1 code-point 101
pfc mru 2240
set class-of-service congestion-notification-profile fcoe_p5_cnp input cable-length 100
set class-of-service congestion-notification-profile fcoe_p5_cnp output ieee-802.1 code-point
101 pfc flow-control-queue 5
set class-of-service interfaces xe-0/0/25 congestion-notification-profile fcoe_p5_cnp
set class-of-service interfaces xe-0/0/26 congestion-notification-profile fcoe_p5_cnp
set applications application fcoe_p5_app ether-type 0x8906
set policy-options application-maps fcoe_p5_app_map application fcoe_p5_app code-points 101
set protocols dcbx interface xe-0/0/25 application-map fcoe_p5_app_map
set protocols dcbx interface xe-0/0/26 application-map fcoe_p5_app_map
```

#### Configuring A Lossless FCoE Forwarding Class On IEEE 802.1p Priority 5

#### Step-by-Step Procedure

To configure a lossless forwarding class for FCoE traffic on IEEE 802.1p priority 5 (code point 101), classify FCoE traffic into the lossless forwarding class, configure a congestion notification profile to enable PFC on the FCoE priority and output queue, and configure DCBX application protocol TLV exchange for traffic on the FCoE priority:

1. Configure the lossless forwarding class (named **fcoe1** and mapped to output queue 5) for FCoE traffic on IEEE 802.1p priority 5:

```
[edit class-of-service]
user@switch# set forwarding-classes class fcoe1 queue-num 5 no-loss
```

2. Configure the ingress classifier (**fcoe\_p5**). The classifier maps the FCoE priority (code point 101) to the lossless FCoE forwarding class **fcoe1**:

```
[edit class-of-service classifiers]
user@switch# set ieee-802.1 fcoe_p5 forwarding-class fcoe1 loss-priority low code-points
101
```

3. Apply the classifier to interfaces **xe-0/0/25** and **xe-0/0/26**:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/25 unit 0 classifiers ieee-802.1 fcoe_p5
user@switch# set interfaces xe-0/0/26 unit 0 classifiers ieee-802.1 fcoe_p5
```



4. Configure the CNP. The input stanza enables PFC on the FCoE priority (IEEE 802.1p code point 101), sets the MRU value (2240 bytes), and sets the cable length value (100 meters). The output stanza configures flow control on output queue 5 on the FCoE priority:

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe_p5_cnp input ieee-802.1 code-point
101 pfc mru 2240
user@switch# set congestion-notification-profile fcoe_p5_cnp input cable-length 100
user@switch# set congestion-notification-profile fcoe_p5_cnp output ieee-802.1 code-point
101 pfc flow-control-queue 5
```

5. Apply the CNP to the interfaces:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/25 congestion-notification-profile fcoe_p5_cnp
user@switch# set interfaces xe-0/0/26 congestion-notification-profile fcoe_p5_cnp
```

6. Configure the DCBX application for FCoE to map to the Ethernet interfaces, so that DCBX can exchange application protocol TLVs on the IEEE 802.1p priority 5 instead of on the default priority 3:

```
[edit]
user@switch# set applications application fcoe_p5_app ether-type 0x8906
```

7. Configure a DCBX application map to map the FCoE application to the correct IEEE 802.1p FCoE priority:

```
[edit]
user@switch# set policy-options application-maps fcoe_p5_app_map application
fcoe_p5_app code-points 101
```

8. Apply the application map to the Ethernet interfaces so that DCBX exchanges FCoE application TLVs on the correct code point:

```
[edit]
user@switch# set protocols dcbx interface xe-0/0/25 application-map fcoe_p5_app_map
user@switch# set protocols dcbx interface xe-0/0/26 application-map fcoe_p5_app_map
```

---

## Verification

To verify the configuration and proper operation of the lossless forwarding class and IEEE 802.1p priority, perform these tasks:

- [Verifying the Forwarding Class Configuration on page 5052](#)
- [Verifying the Behavior Aggregate Classifier Configuration on page 5053](#)
- [Verifying the PFC Flow Control Configuration \(CNP\) on page 5053](#)
- [Verifying the Interface Configuration on page 5054](#)
- [Verifying the DCBX Application Configuration on page 5055](#)
- [Verifying the DCBX Application Map Configuration on page 5055](#)
- [Verifying the DCBX Application Protocol Exchange Interface Configuration on page 5055](#)

### *Verifying the Forwarding Class Configuration*

**Purpose** Verify that the lossless forwarding class **fcoe1** has been created.



**Action** Show the forwarding class configuration by using the operational command **show class-of-service forwarding class**:

```
user@switch# show class-of-service forwarding-class
```

Forwarding class	ID	Queue	Policing priority	No-Loss
best-effort	0	0	normal	Disabled
fcoe	1	3	normal	Enabled
no-loss	2	4	normal	Enabled
network-control	3	7	normal	Disabled
fcoe1	4	5	normal	Enabled
mcast	8	8	normal	Disabled

**Meaning** The **show class-of-service forwarding-class** command shows all of the forwarding classes. The command output shows that the **fcoe1** forwarding class is configured on output queue **5** with the no-loss packet drop attribute enabled.

Because we did not explicitly configure the default forwarding classes, they remain in their default state, including the lossless configuration of the **fcoe** and **no-loss** default forwarding classes.

#### *Verifying the Behavior Aggregate Classifier Configuration*

**Purpose** Verify that the classifier maps the forwarding classes to the correct IEEE 802.1p code points (priorities) and packet loss priorities.

**Action** List the classifier configured to support lossless FCoE transport using the operational mode command **show class-of-service classifier**:

```
user@switch> show class-of-service classifier
```

```
Classifier: fcoe_p5, Code point type: ieee-802.1, Index: 63065
```

Code point	Forwarding class	Loss priority
101	fcoe1	low

**Meaning** The **show class-of-service classifier** command shows the IEEE 802.1p code points and the loss priorities that are mapped to the forwarding classes in each classifier.

Classifier **fcoe\_p5** maps code point **101** (priority 5) to explicitly configured lossless forwarding class **fcoe1** and a packet loss priority of **low**, and all other priorities to the **best-effort** forwarding class with a packet loss priority of **high**.

#### *Verifying the PFC Flow Control Configuration (CNP)*

**Purpose** Verify that PFC is enabled on the correct input priority and that flow control is configured on the correct output queue in the CNP.



**Action** Display the congestion notification profile using the operational mode command **show class-of-service congestion-notification**:

```
user@switch> show class-of-service congestion-notification
Name: fcoe_p5_cnp, Index: 12137
Type: Input
Cable Length: 100 m
  Priority  PFC          MRU
  000      Disabled
  001      Disabled
  010      Disabled
  011      Disabled
  100      Disabled
  101      Enabled    2240
  110      Disabled
  111      Disabled
Type: Output
  Priority  Flow-Control-Queues
  101      5
```

**Meaning** The **show class-of-service congestion-notification** command shows the input and output stanzas of the configured CNPs.

The **fcoe\_p5\_cnp** CNP input stanza shows that PFC is enabled on code point **101** (priority 5), the MRU is **2240** bytes, and the cable length is **100** meters. The CNP output stanza shows that output flow control is configured on queue **5** for code point **101** (priority 5).

### *Verifying the Interface Configuration*

**Purpose** Verify that the correct classifier and congestion notification profile are configured on the interfaces.

**Action** List the ingress interfaces using the operational mode commands **show configuration class-of-service interfaces xe-0/0/25** and **show configuration class-of-service interfaces xe-0/0/26**:

```
user@switch> show configuration class-of-service interfaces xe-0/0/25
congestion-notification-profile fcoe_p5_cnp;
unit 0 {
  classifiers {
    ieee-802.1 fcoe_p5;
  }
}

user@switch> show configuration class-of-service interfaces xe-0/0/26
congestion-notification-profile fcoe_p5_cnp;
unit 0 {
  classifiers {
    ieee-802.1 fcoe_p5;
  }
}
```

**Meaning** Both the **show configuration class-of-service interfaces xe-0/0/25** command and the **show configuration class-of-service interfaces xe-0/0/26** command show that the



congestion notification profile **fcoe\_p5\_cnp** is configured on each interface, and that the IEEE 802.1p classifier associated with each interface is **fcoe\_p5**.

#### *Verifying the DCBX Application Configuration*

**Purpose** Verify that the DCBX application for FCoE is configured.

**Action** List the DCBX applications by using the configuration mode command **show applications**:

```
user@switch# show applications
application fcoe_p5_app {
    ether-type 0x8906;
```

**Meaning** The **show applications** configuration mode command shows all of the configured applications. The output shows that the application **fcoe\_p5\_app** is configured with an EtherType of **0x8906**.

#### *Verifying the DCBX Application Map Configuration*

**Purpose** Verify that the application map is configured.

**Action** List the application maps by using the configuration mode command **show policy-options application-maps**:

```
user@switch# show policy-options application-maps
fcoe_p5_app_map {
    application fcoe_p5_app code-points 101;
}
```

**Meaning** The **show policy-options application-maps** configuration mode command lists all of the configured application maps and the applications that belong to each application map. The output shows that application map **fcoe\_p5\_app\_map** consists of the application named **fcoe\_p5\_app**, which is mapped to IEEE 802.1p code point **101**.

#### *Verifying the DCBX Application Protocol Exchange Interface Configuration*

**Purpose** Verify that the application map is applied to the correct interfaces.

**Action** List the application maps on each interface using the configuration mode command **show protocols dcbx**:

```
user@switch# show protocols dcbx
interface xe-0/0/25.0 {
    application-map fcoe_p5_app_map;
}
interface xe-0/0/26.0 {
    application-map fcoe_p5_app_map;
}
```

**Meaning** The **show protocols dcbx** configuration mode command lists the application map association with interfaces. The output shows that interfaces **xe-0/0/25.0** and **xe-0/0/26.0** use application map **fcoe\_p5\_app\_map**.



**Related Documentation**

- [Example: Configuring Two or More Lossless FCoE IEEE 802.1p Priorities on Different FCoE Transit Switch Interfaces on page 5065](#)
- [Example: Configuring Two or More Lossless FCoE Priorities on the Same FCoE Transit Switch Interface on page 5056](#)
- [Example: Configuring Lossless IEEE 802.1p Priorities on Ethernet Interfaces for Multiple Applications \(FCoE and iSCSI\) on page 5078](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)
- [Example: Configuring Unicast Classifiers on page 5014](#)
- [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
- [Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)

## Example: Configuring Two or More Lossless FCoE Priorities on the Same FCoE Transit Switch Interface

The default system configuration supports FCoE traffic on priority 3 (IEEE 802.1p code point 011). If the FCoE traffic on your converged Ethernet network uses priority 3, the only user configuration required for lossless transport is to enable PFC on code point 011 on the FCoE ingress interfaces.

However, if your converged Ethernet network uses more than one priority for FCoE traffic, you need to configure lossless transport for each FCoE priority. This example shows you how to configure lossless FCoE transport on a converged Ethernet network that uses both priority 3 (IEEE 802.1p code point 011) and priority 5 (IEEE 802.1p code point 101) for FCoE traffic.

- [Requirements on page 5056](#)
- [Overview on page 5056](#)
- [Configuration on page 5059](#)
- [Verification on page 5061](#)

### Requirements

---

This example uses the following hardware and software components:

- One Juniper Networks QFX3500 Switch in transit switch (FIP snooping) mode
- Junos OS Release 12.3 or later for the QFX Series

### Overview

---

Some network topologies support FCoE traffic on more than one IEEE 802.1p priority. For example, a converged Ethernet network might include two separate FCoE networks that use different priorities to identify traffic. Interfaces that carry traffic for both FCoE networks need to support lossless FCoE transport on both priorities.

Supporting lossless behavior for two FCoE traffic classes requires configuring:



- At least one lossless forwarding class for FCoE traffic (this example uses the default **fcoe** forwarding class as one of the lossless FCoE forwarding classes, so we need to explicitly configure only one FCoE forwarding class).
- A behavior aggregate (BA) classifier to map the FCoE forwarding classes to the appropriate IEEE 802.1p code points (priorities).
- A congestion notification profile (CNP) to enable PFC on the FCoE code points at the interface ingress and to configure PFC flow control on the interface egress so that the interface can respond to PFC messages received from the connected peer.
- DCBX applications and an application map to support DCBX application TLV exchange for the lossless FCoE traffic on the configured FCoE priorities. By default, DCBX is enabled on all Ethernet interfaces, but only on priority 3 (IEEE 802.1p code point 011). To support DCBX application TLV exchange when you are not using the default configuration, you must configure all of the applications and map them to interfaces and priorities.

The priorities specified in the BA classifier, CNP, and DCBX application map must match, or the configuration does not work. You must specify the same lossless FCoE forwarding class in each configuration and use the same IEEE 802.1p code point (priority) so that the FCoE traffic is properly classified into flows and so that those flows receive lossless treatment.

### **Topology**

This example shows how to configure two lossless FCoE traffic classes on an interface, map them to two different priorities, and configure flow control to ensure lossless behavior. This example uses two Ethernet interfaces, xe-0/0/20 and xe-0/0/21, that are connected to the converged Ethernet network. Both interfaces transport FCoE traffic on priorities 3 (011) and 5 (101), and must support lossless transport of that traffic.

[Table 428 on page 5057](#) shows the configuration components for this example.

**Table 428: Components of the Two Lossless FCoE Priorities on an Interface Configuration Topology**

Component	Settings
Hardware	QFX3500 switch



Table 428: Components of the Two Lossless FCoE Priorities on an Interface Configuration Topology (*continued*)

Component	Settings
Forwarding classes	<p>Name—<b>fcoe1</b>  Queue mapping—queue 5  Packet drop attribute—<b>no-loss</b></p> <p><b>NOTE:</b> A lossless forwarding class can be mapped to any output queue. However, because the <b>fcoe1</b> forwarding class uses priority 5 in this example, matching that traffic to a forwarding class that uses queue 5 creates a configuration that is logical and easy to map because the priority and the queue are identified by the same number.</p> <p>Name—<b>fcoe</b>  This is the default lossless FCoE forwarding class, so no configuration required. The <b>fcoe</b> forwarding class is mapped to priority 3 (IEEE 802.1p code point 011) and to output queue 3 with a packet drop attribute of <b>no-loss</b>.</p>
BA classifier	<p>Name—<b>fcoe_classifier</b></p> <p>FCoE priority mapping for forwarding class <b>fcoe</b>—mapped to code point <b>011</b> (IEEE 802.1p priority 3) and a packet loss priority of <b>low</b>.</p> <p>FCoE priority mapping for forwarding class <b>fcoe1</b>—mapped to code point <b>101</b> (IEEE 802.1p priority 5) and a packet loss priority of <b>low</b>.</p>
PFC configuration (CNP)	<p>CNP name—<b>fcoe_cnp</b></p> <p>Input CNP code points—<b>011</b> and <b>101</b></p> <p>MRU—2240 bytes</p> <p>Cable length—100 meters</p> <p>Output CNP code points—<b>011</b> and <b>101</b></p> <p>Output CNP flow control queues—<b>3</b> and <b>5</b></p> <p><b>NOTE:</b> When you apply a CNP with an explicit output queue flow control configuration to an interface, the explicit CNP overwrites the default output CNP. The output queues that are enabled for PFC pause in the default configuration (queues 3 and 4) are not enabled for PFC pause unless they are included in the explicitly configured output CNP. In this example, because the explicit output CNP overwrites the default output CNP, we must explicitly configure flow control on queue 3.</p>



**Table 428: Components of the Two Lossless FCoE Priorities on an Interface Configuration Topology (*continued*)**

Component	Settings
DCBX application mapping	Application name— <b>fcoe_app</b>  Application EtherType— <b>0x8906</b>  Application map name— <b>fcoe_app_map</b>  Application map code points— <b>011 and 101</b>  <b>NOTE:</b> LLDP and DCBX must be enabled on the interface. By default, LLDP and DCBX are enabled on all Ethernet interfaces.
Interfaces	Interfaces <b>xe-0/0/20</b> and <b>xe-0/0/21</b> use the same configuration: <ul style="list-style-type: none"> <li>• Classifier—<b>fcoe_classifier</b></li> <li>• CNP—<b>fcoe_cnp</b></li> <li>• DCBX application map—<b>fcoe_app_map</b></li> </ul>



**NOTE:** This example does not include scheduling (bandwidth allocation) configuration or the FIP snooping configuration. This examples focuses only on the lossless FCoE priority configuration.

### Configuration

#### CLI Quick Configuration

To quickly configure two lossless FCoE forwarding classes that use different priorities on an FCoE transit switch interface, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set class-of-service forwarding-classes class fcoe1 queue-num 5 no-loss
set class-of-service classifiers ieee-802.1 fcoe_classifier forwarding-class fcoe loss-priority low
code-points 011
set class-of-service classifiers ieee-802.1 fcoe_classifier forwarding-class fcoe1 loss-priority low
code-points 101set class-of-service interfaces xe-0/0/20 unit 0 classifiers ieee-802.1 fcoe_classifier
set class-of-service interfaces xe-0/0/21 unit 0 classifiers ieee-802.1 fcoe_classifier
set class-of-service congestion-notification-profile fcoe_cnp input ieee-802.1 code-point 011 pfc
mru 2240
set class-of-service congestion-notification-profile fcoe_cnp input ieee-802.1 code-point 101 pfc
mru 2240
set class-of-service congestion-notification-profile fcoe_cnp input cable-length 100
set class-of-service congestion-notification-profile fcoe_cnp output ieee-802.1 code-point 011
pfc flow-control-queue 3
set class-of-service congestion-notification-profile fcoe_cnp output ieee-802.1 code-point 101
pfc flow-control-queue 5
set class-of-service interfaces xe-0/0/20 congestion-notification-profile fcoe_cnp
set class-of-service interfaces xe-0/0/21 congestion-notification-profile fcoe_cnp
set applications application fcoe_app ether-type 0x8906
set policy-options application-maps fcoe_app_map application fcoe_app code-points [011 101]
set protocols dcbx interface xe-0/0/20 application-map fcoe_app_map
set protocols dcbx interface xe-0/0/21 application-map fcoe_app_map
```



**Step-by-Step Procedure** To configure two lossless forwarding classes for FCoE traffic on the same interface, classify FCoE traffic into the forwarding classes, configure CNPs to enable PFC on the FCoE priorities and output queues, and configure DCBX application protocol TLV exchange for traffic on both FCoE priorities:

1. Configure lossless forwarding class **fcoe1** and map it to output queue **5** for FCoE traffic that uses IEEE 802.1p priority 5:

```
[edit class-of-service]
user@switch# set forwarding-classes class fcoe1 queue-num 5 no-loss
```



**NOTE:** This examples uses the default **fcoe** forwarding class as the other lossless FCoE forwarding class.

2. Configure the ingress classifier. The classifier maps the FCoE priorities (IEEE 802.1p code points 011 and 101) to lossless FCoE forwarding classes **fcoe** and **fcoe1**, respectively:

```
[edit class-of-service classifiers]
user@switch# set ieee-802.1 fcoe_classifier forwarding-class fcoe loss-priority low
code-points 011
user@switch# set ieee-802.1 fcoe_classifier forwarding-class fcoe1 loss-priority low
code-points 101
```

3. Apply the classifier to the interfaces:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/20 unit 0 classifiers ieee-802.1 fcoe_classifier
user@switch# set interfaces xe-0/0/21 unit 0 classifiers ieee-802.1 fcoe_classifier
```

4. Configure the CNP. The input stanza enables PFC on the FCoE priorities (IEEE 802.1p code points 011 and 101), sets the MRU value (2240 bytes), and sets the cable length value (100 meters). The output stanza configures flow control on output queues 3 and 5 on the FCoE priorities:

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe_cnp input ieee-802.1 code-point
011 pfc mru 2240
user@switch# set congestion-notification-profile fcoe_cnp input ieee-802.1 code-point
101 pfc mru 2240
user@switch# set congestion-notification-profile fcoe_cnp input cable-length 100
user@switch# set congestion-notification-profile fcoe_cnp output ieee-802.1 code-point
011 pfc flow-control-queue 3
user@switch# set congestion-notification-profile fcoe_cnp output ieee-802.1 code-point
101 pfc flow-control-queue 5
```

5. Apply the CNP to the interfaces:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/20 congestion-notification-profile fcoe_cnp
user@switch# set interfaces xe-0/0/21 congestion-notification-profile fcoe_cnp
```

6. Configure a DCBX application for FCoE to map to the Ethernet interfaces, so that DCBX can exchange application protocol TLVs on both of the IEEE 802.1p priorities used for FCoE transport:

```
[edit]
```



```
user@switch# set applications application fcoe_app ether-type 0x8906
```

7. Configure a DCBX application map to map the FCoE application to the correct IEEE 802.1p FCoE priorities:

```
[edit]
user@switch# set policy-options application-maps fcoe_app_map application fcoe_app
code-points [011 101]
```

8. Apply the application map to the interfaces so that DCBX exchanges FCoE application TLVs on the correct code points:

```
[edit]
user@switch# set protocols dcbx interface xe-0/0/20 application-map fcoe_app_map
user@switch# set protocols dcbx interface xe-0/0/21 application-map fcoe_app_map
```

### Verification

To verify the configuration and proper operation of the lossless forwarding classes and IEEE 802.1p priorities, perform these tasks:

- [Verifying the Forwarding Class Configuration on page 5061](#)
- [Verifying the Behavior Aggregate Classifier Configuration on page 5062](#)
- [Verifying the PFC Flow Control Configuration \(CNP\) on page 5062](#)
- [Verifying the Interface Configuration on page 5063](#)
- [Verifying the DCBX Application Configuration on page 5063](#)
- [Verifying the DCBX Application Map Configuration on page 5064](#)
- [Verifying the DCBX Application Protocol Exchange Interface Configuration on page 5064](#)

#### Verifying the Forwarding Class Configuration

**Purpose** Verify that the lossless forwarding class **fcoe1** has been created.

**Action** Show the forwarding class configuration by using the operational command **show class-of-service forwarding-class**:

```
user@switch# show class-of-service forwarding-class
```

Forwarding class	ID	Queue	Policing priority	No-Loss
best-effort	0	0	normal	Disabled
fcoe	1	3	normal	Enabled
no-loss	2	4	normal	Enabled
network-control	3	7	normal	Disabled
fcoe1	4	5	normal	Enabled
mcast	8	8	normal	Disabled

**Meaning** The **show class-of-service forwarding-class** command shows all of the forwarding classes. The command output shows that the **fcoe1** forwarding class is configured on output queue 5 with the no-loss packet drop attribute enabled.



Because we did not explicitly configure the default forwarding classes, they remain in their default state, including the lossless configuration of the **fcoe** and **no-loss** default forwarding classes.

#### *Verifying the Behavior Aggregate Classifier Configuration*

**Purpose** Verify that the three classifiers map the forwarding classes to the correct IEEE 802.1p code points (priorities) and packet loss priorities.

**Action** List the classifiers using the operational mode command **show class-of-service classifier**:

```
user@switch> show class-of-service classifier
Classifier: fcoe_classifier, Code point type: ieee-802.1, Index: 10964
  Code point      Forwarding class      Loss priority
  011             fcoe                      low
  101             fcoe1                     low
```

**Meaning** The **show class-of-service classifier** command shows the IEEE 802.1p code points and the loss priorities that are mapped to the forwarding classes in each classifier.

Classifier **fcoe\_classifier** maps code point **011** to default lossless forwarding class **fcoe** and a packet loss priority of **low**, and maps code point **101** to explicitly configured lossless forwarding class **fcoe1** and a packet loss priority of **low**.

#### *Verifying the PFC Flow Control Configuration (CNP)*

**Purpose** Verify that PFC is enabled on the correct input priorities and that flow control is configured on the correct output queues and priorities.

**Action** List the CNPs using the operational mode command **show class-of-service congestion-notification**:

```
user@switch> show class-of-service congestion-notification
Name: fcoe_cnp, Index: 46504
Type: Input
Cable Length: 100 m
  Priority  PFC      MRU
  000      Disabled
  001      Disabled
  010      Disabled
  011      Enabled   2240
  100      Disabled
  101      Enabled   2240
  110      Disabled
  111      Disabled
Type: Output
  Priority  Flow-Control-Queues
  011      3
  101      5
```

**Meaning** The **show class-of-service congestion-notification** command shows the input and output stanzas of the CNP.



The CNP **fcoe\_cnp** input stanza shows that PFC is enabled on code points **011** and **101**, the MRU is **2240** bytes on both priorities, and the interface cable length is **100** meters. The CNP output stanza shows that output flow control is configured on queues **3** and **5** for code points **011** and **101**, respectively.

### *Verifying the Interface Configuration*

- Purpose** Verify that the classifier and congestion notification profile are configured on the interfaces. Both interfaces should show the same configuration.
- Action** List the ingress interfaces using the operational mode commands **show configuration class-of-service interfaces xe-0/0/20** and **show configuration class-of-service interfaces xe-0/0/21**:
- ```
user@switch> show configuration class-of-service interfaces xe-0/0/20
congestion-notification-profile fcoe_cnp;
unit 0 {
    classifiers {
        ieee-802.1 fcoe_classifier;
    }
}
```
- ```
user@switch> show configuration class-of-service interfaces xe-0/0/21
congestion-notification-profile fcoe_cnp;
unit 0 {
    classifiers {
        ieee-802.1 fcoe_classifier;
    }
}
```
- Meaning** The **show configuration class-of-service interfaces xe-0/0/20** command shows that the congestion notification profile **fcoe\_cnp** is configured on the interface, and that the IEEE 802.1p classifier associated with the interface is **fcoe\_classifier**.
- The **show configuration class-of-service interfaces xe-0/0/21** command shows that the congestion notification profile **fcoe\_cnp** is configured on the interface, and that the IEEE 802.1p classifier associated with the interface is **fcoe\_classifier**.

### *Verifying the DCBX Application Configuration*

- Purpose** Verify that the DCBX application for FCoE is configured.
- Action** List the DCBX applications by using the configuration mode command **show applications**:
- ```
user@switch# show applications
application fcoe_app {
    ether-type 0x8906;
```
- Meaning** The **show applications** configuration mode command shows all of the configured applications. The output shows that the application **fcoe\_app** is configured with an EtherType of **0x8906**.



### *Verifying the DCBX Application Map Configuration*

**Purpose** Verify that the application map is configured.

**Action** List the application maps by using the configuration mode command **show policy-options application-maps**:

```
user@switch# show policy-options application-maps
fcoe_app_map {
    application fcoe_app code-points [011 101];
}
```

**Meaning** The **show policy-options application-maps** configuration mode command lists all of the configured application maps and the applications that belong to each application map. The output shows that application map **fcoe\_app\_map** consists of the application named **fcoe\_app**, which is mapped to IEEE 802.1p code points **011** and **101** (priorities 3 and 5, respectively).

### *Verifying the DCBX Application Protocol Exchange Interface Configuration*

**Purpose** Verify that the application map is applied to the interfaces.

**Action** List the application maps on each interface using the configuration mode command **show protocols dcbx**:

```
user@switch# show protocols dcbx
interface xe-0/0/20.0 {
    application-map fcoe_app_map;
}
interface xe-0/0/21.0 {
    application-map fcoe_app_map;
}
```

**Meaning** The **show protocols dcbx** configuration mode command lists the application map association with interfaces. The output shows that interfaces **xe-0/0/20.0** and **xe-0/0/21.0** use application map **fcoe\_app\_map**.

- Related Documentation**
- [Example: Configuring Two or More Lossless FCoE IEEE 802.1p Priorities on Different FCoE Transit Switch Interfaces on page 5065](#)
  - [Example: Configuring Lossless FCoE Traffic When the Converged Ethernet Network Does Not Use IEEE 802.1p Priority 3 for FCoE Traffic \(FCoE Transit Switch\) on page 5048](#)
  - [Example: Configuring Lossless IEEE 802.1p Priorities on Ethernet Interfaces for Multiple Applications \(FCoE and iSCSI\) on page 5078](#)
  - [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)
  - [Example: Configuring Unicast Classifiers on page 5014](#)
  - [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
  - [Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896](#)
  - [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)



## Example: Configuring Two or More Lossless FCoE IEEE 802.1p Priorities on Different FCoE Transit Switch Interfaces

Although the default configuration provides two lossless forwarding classes mapped to two different IEEE 802.1p priorities (code points), you can explicitly configure up to six lossless forwarding classes and map them to different priorities. You can support up to six different types of lossless traffic, and you can support the same type of traffic if it uses different priorities in different parts of your converged network.

This example shows you how to configure two lossless forwarding classes for FCoE traffic and map them to two different priorities on an FCoE transit switch.

- [Requirements on page 5065](#)
- [Overview on page 5065](#)
- [Configuration on page 5069](#)
- [Verification on page 5072](#)

### Requirements

This example uses the following hardware and software components:

- One Juniper Networks QFX3500 Switch in transit switch (FIP snooping) mode
- Junos OS Release 12.3 or later for the QFX Series

### Overview

Some network topologies support FCoE traffic on more than one IEEE 802.1p priority. For example, when the QFX3500 switch acts as a transit switch, it could be connected to two QFX3500 switches in FCoE-FC gateway mode. Each of the gateway switches could connect a set of FCoE clients to a different SAN, and each set of FCoE clients could use a different priority for FCoE traffic to avoid fate sharing and maintain separation of the two FCoE networks. In this case, you need to configure two forwarding classes for FCoE traffic, each mapped to a different output queue and a different priority.

Supporting lossless behavior for two FCoE traffic classes requires configuring:

- At least one lossless forwarding class for FCoE traffic (this example uses the default **fcoe** forwarding class as one of the two lossless FCoE forwarding classes, so we need to explicitly configure only one FCoE forwarding class)
- Behavior aggregate (BA) classifiers to map the FCoE forwarding classes to the appropriate IEEE 802.1p code points (priorities) on each interface
- Congestion notification profiles (CNPs) for each interface to enable PFC on the FCoE code points at the interface ingress and to configure PFC flow control on the interface egress so that the interface can respond to PFC messages received from the connected peer
- DCBX applications and an application map to support DCBX application TLV exchange for the lossless FCoE traffic on the configured FCoE priorities. By default, DCBX is enabled on all Ethernet interfaces, but only on priority 3 (IEEE 802.1p code point 011).



To support DCBX application TLV exchange when you are not using the default configuration, you must configure all of the applications and map them to interfaces and priorities.

The priorities specified in the BA classifiers, CNPs, and DCBX application map must match, or the configuration does not work. You must specify the same lossless FCoE forwarding class in each configuration and use the same IEEE 802.1p code point (priority) so that the FCoE traffic is properly classified into flows and so that those flows receive lossless treatment.


### Topology

This example shows how to configure two lossless FCoE traffic classes, map them to two different priorities, and configure flow control to ensure lossless behavior for those priorities on the interfaces. This example uses three Ethernet interfaces, xe-0/0/20, xe-0/0/21, and xe-0/0/22:

- Interface xe-0/0/20 connects to an FCoE-FC gateway that connects to Fibre Channel (FC) SAN 1. FCoE traffic to and from FC SAN 1 uses the default **fcoe** forwarding class and the default mapping to priority 3 (IEEE 802.1p code point 011) and output queue 3.
- Interface xe-0/0/21 connects to another FCoE-FC gateway that connects to Fibre Channel (FC) SAN 2. FCoE traffic to and from FC SAN-2 uses an explicitly configured FCoE forwarding class that is mapped to priority 5 (code point 101) and output queue 5.
- Interface xe-0/0/22 connects to FCoE devices on the converged Ethernet network and handles traffic destined for FC SAN 1 and FC SAN 2. Interface xe-0/0/22 must properly handle lossless FCoE traffic of both priorities (both FCoE forwarding classes), including pausing the traffic on ingress or egress as required.

Figure 190 on page 5066 shows the topology for this example, and Table 429 on page 5066 shows the configuration components for this example.

**Figure 190: Topology of the Two Lossless FCoE Priorities Example**

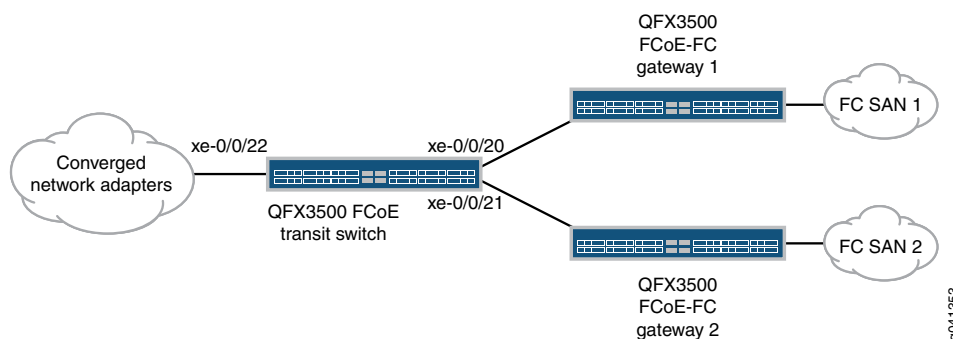

**Table 429: Components of the Two Lossless FCoE Priorities Configuration Topology**

| Component | Settings       |
|-----------|----------------|
| Hardware  | QFX3500 switch |



Table 429: Components of the Two Lossless FCoE Priorities Configuration Topology (*continued*)

| Component          | Settings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Forwarding classes | <p>Name—<b>fcoe1</b><br/> Queue mapping—queue 5<br/> Packet drop attribute—<b>no-loss</b></p> <p><b>NOTE:</b> A lossless forwarding class can be mapped to any output queue. However, because the <b>fcoe1</b> forwarding class uses priority 5 in this example, matching that traffic to a forwarding class that uses queue 5 creates a configuration that is logical and easy to map because the priority and the queue are identified by the same number.</p> <p>Name—<b>fcoe</b><br/> This is the default lossless FCoE forwarding class, so no configuration required. The <b>fcoe</b> forwarding class is mapped to priority 3 (IEEE 802.1p code point 011) and to output queue 3 with a packet drop attribute of <b>no-loss</b></p>                                                                                                                                                                                                      |
| BA classifiers     | <p>Each interface requires a different classifier because each interface handles a different subset of FCoE traffic.</p> <ul style="list-style-type: none"> <li>Interface xe-0/0/20 classifier:<br/> Name—<b>fcoe_p3</b><br/> FCoE priority mapping—Forwarding class <b>fcoe</b> mapped to code point <b>011</b> (IEEE 802.1p priority 3) and a packet loss priority of <b>low</b>.</li> <li>Interface xe-0/0/21 classifier:<br/> Name—<b>fcoe_p5</b><br/> FCoE priority mapping—Forwarding class <b>fcoe1</b> mapped to code point <b>101</b> (IEEE 802.1p priority 5) and a packet loss priority of <b>low</b>.</li> <li>Interface xe-0/0/22 classifier:<br/> Name—<b>fcoe_p3_p5</b><br/> FCoE priority mapping—Forwarding class <b>fcoe1</b> mapped to code point <b>101</b> and a packet loss priority of <b>low</b>, and forwarding class <b>fcoe</b> mapped to code point <b>011</b> and a packet loss priority of <b>low</b>.</li> </ul> |



Table 429: Components of the Two Lossless FCoE Priorities Configuration Topology (*continued*)

| Component                | Settings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PFC configuration (CNPs) | <p>Each interface requires a different CNP because each interface handles a different subset of FCoE traffic and must pause that traffic on different priorities.</p> <ul style="list-style-type: none"> <li>Interface xe-0/0/20 CNP:<br/>CNP name—<b>fcoe_p3_cnp</b><br/>Input CNP code point—<b>011</b><br/>MRU—2240 bytes<br/>Cable length—100 meters</li> </ul> <p><b>NOTE:</b> Because interface xe-0/0/20 uses the default FCoE configuration, output queue 3 is paused by default and you do not need to configure the output stanza of the CNP.</p> <ul style="list-style-type: none"> <li>Interface xe-0/0/21 CNP:<br/>CNP name—<b>fcoe_p5_cnp</b><br/>Input CNP code point—<b>101</b><br/>MRU—2240 bytes<br/>Cable length—150 meters<br/>Output CNP code point—<b>101</b><br/>Output CNP flow control queue—<b>5</b></li> <li>Interface xe-0/0/22 CNP:<br/>CNP name—<b>fcoe_p3_p5_cnp</b><br/>Input CNP code points—<b>011</b> and <b>101</b><br/>MRU—2240 bytes (both priorities)<br/>Cable length—100 meters<br/>Output CNP code points—<b>011</b> (for queue 3) and <b>101</b> (for queue 5)<br/>Output CNP flow control queues—<b>3</b> for priority 3 (code point 011) and <b>5</b> for priority 5 (code point 101)</li> </ul> <p><b>NOTE:</b> When you apply a CNP with an explicit output queue flow control configuration to an interface, the explicit CNP overwrites the default output CNP. The output queues that are enabled for pause in the default configuration (queues 3 and 4) are not enabled for pause unless they are included in the explicitly configured output CNP.</p> |



Table 429: Components of the Two Lossless FCoE Priorities Configuration Topology (*continued*)

| Component                | Settings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DCBX application mapping | <p>Interface xe-0/0/20 does not need an application map because DCBX exchanges application protocol TLVs only on the default FCoE priority (priority 3).</p> <p>Interface xe-0/0/21 requires an application map that enables DCBX application protocol TLV exchange on priority 5 (code point 101) for FCoE traffic. Interface xe-0/0/22 requires an application map that enables DCBX application protocol TLV exchange both on priority 3 (code point 011) and on priority 5 (code point 101) for FCoE traffic.</p> <ul style="list-style-type: none"> <li>Interface xe-0/0/21 DCBX application mapping:           <ul style="list-style-type: none"> <li>Application name—<b>fcoe_p5_app</b></li> <li>Application ether-type—<b>0x8906</b></li> <li>Application map name—<b>fcoe_p5_app_map</b></li> <li>Application map code points—<b>101</b></li> </ul> </li> <li>Interface xe-0/0/22 DCBX application mapping:           <ul style="list-style-type: none"> <li>Application name—<b>fcoe_all_app</b></li> <li>Application ether-type—<b>0x8906</b></li> <li>Application map name—<b>fcoe_all_app_map</b></li> <li>Application map code points—<b>011 and 101</b></li> </ul> </li> </ul> <p><b>NOTE:</b> LLDP and DCBX must be enabled on the interface. By default, LLDP and DCBX are enabled on all Ethernet interfaces.</p> |



**NOTE:** This example does not include scheduling (bandwidth allocation) configuration or the FIP snooping configuration. This examples focuses only on the lossless FCoE priority configuration.

### Configuration

#### CLI Quick Configuration

To quickly configure two lossless FCoE forwarding classes that use different priorities on an FCoE transit switch, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set class-of-service forwarding-classes class fcoe1 queue-num 5 no-loss
set class-of-service classifiers ieee-802.1 fcoe_p3 forwarding-class fcoe loss-priority low
code-points 011
set class-of-service classifiers ieee-802.1 fcoe_p5 forwarding-class fcoe1 loss-priority low
code-points 101
set class-of-service classifiers ieee-802.1 fcoe_p3_p5 forwarding-class fcoe loss-priority low
code-points 011
set class-of-service classifiers ieee-802.1 fcoe_p3_p5 forwarding-class fcoe1 loss-priority low
code-points 101
set class-of-service interfaces xe-0/0/20 unit 0 classifiers ieee-802.1 fcoe_p3
set class-of-service interfaces xe-0/0/21 unit 0 classifiers ieee-802.1 fcoe_p5
set class-of-service interfaces xe-0/0/22 unit 0 classifiers ieee-802.1 fcoe_p3_p5
set class-of-service congestion-notification-profile fcoe_p3_cnp input ieee-802.1 code-point 011
pfc mru 2240
```



```

set class-of-service congestion-notification-profile fcoe_p3_cnp input cable-length 100
set class-of-service congestion-notification-profile fcoe_p5_cnp input ieee-802.1 code-point 101
pfc mru 2240
set class-of-service congestion-notification-profile fcoe_p5_cnp input cable-length 150
set class-of-service congestion-notification-profile fcoe_p5_cnp output ieee-802.1 code-point
101 pfc flow-control-queue 5
set class-of-service congestion-notification-profile fcoe_p3_p5_cnp input ieee-802.1 code-point
011 pfc mru 2240
set class-of-service congestion-notification-profile fcoe_p3_p5_cnp input ieee-802.1 code-point
101 pfc mru 2240
set class-of-service congestion-notification-profile fcoe_p3_p5_cnp input cable-length 100
set class-of-service congestion-notification-profile fcoe_p3_p5_cnp output ieee-802.1 code-point
011 pfc flow-control-queue 3
set class-of-service congestion-notification-profile fcoe_p3_p5_cnp output ieee-802.1 code-point
101 pfc flow-control-queue 5
set class-of-service interfaces xe-0/0/20 congestion-notification-profile fcoe_p3_cnp
set class-of-service interfaces xe-0/0/21 congestion-notification-profile fcoe_p5_cnp
set class-of-service interfaces xe-0/0/22 congestion-notification-profile fcoe_p3_p5_cnp
set applications application fcoe_p5_app ether-type 0x8906
set applications application fcoe_all_app ether-type 0x8906
set policy-options application-maps fcoe_p5_app_map application fcoe_p5_app code-points 101
set policy-options application-maps fcoe_all_app_map application fcoe_all_app code-points [011
101]
set protocols dcbx interface xe-0/0/21 application-map fcoe_p5_app_map
set protocols dcbx interface xe-0/0/22 application-map fcoe_all_app_map

```

### Step-by-Step Procedure

To configure two lossless forwarding classes for FCoE traffic on different interfaces, classify FCoE traffic into the forwarding classes, configure congestion notification profiles to enable PFC on the FCoE priorities and output queues, and configure DCBX application protocol TLV exchange for traffic on both FCoE priorities:

1. Configure lossless forwarding class **fcoe1** and map it to output queue **5** for FCoE traffic that uses IEEE 802.1p priority 5:

```

[edit class-of-service]
user@switch# set forwarding-classes class fcoe1 queue-num 5 no-loss

```



**NOTE:** This examples uses the default **fcoe** forwarding class as the other lossless FCoE forwarding class.

2. Configure the ingress classifier (**fcoe\_p3**) for interface **xe-0/0/20**. The classifier maps the FCoE priority (IEEE 802.1p code point **011**) to lossless FCoE forwarding class **fcoe**:

```

[edit class-of-service classifiers]
user@switch# set ieee-802.1 fcoe_p3 forwarding-class fcoe loss-priority low code-points
011

```

3. Configure the ingress classifier (**fcoe\_p5**) for interface **xe-0/0/21**. The classifier maps the FCoE priority (IEEE 802.1p code point **101**) to lossless FCoE forwarding class **fcoe1**:

```

[edit class-of-service classifiers]
user@switch# set ieee-802.1 fcoe_p5 forwarding-class fcoe1 loss-priority low code-points
101

```



4. Configure the ingress classifier (**fcoe\_p3\_p5**) for interface **xe-0/0/22**. The classifier maps the two FCoE priorities (IEEE 802.1p code points **011** and **101**) to the two lossless FCoE forwarding classes **fcoe** and **fcoe1**, respectively:

```
[edit class-of-service classifiers]
user@switch# set ieee-802.1 fcoe_p3_p5 forwarding-class fcoe loss-priority low code-points 011
user@switch# set ieee-802.1 fcoe_p3_p5 forwarding-class fcoe1 loss-priority low code-points 101
```

5. Apply each classifier to the appropriate interface:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/20 unit 0 classifiers ieee-802.1 fcoe_p3
user@switch# set interfaces xe-0/0/21 unit 0 classifiers ieee-802.1 fcoe_p5
user@switch# set interfaces xe-0/0/22 unit 0 classifiers ieee-802.1 fcoe_p3_p5
```

6. Configure the CNP input stanza for interface **xe-0/0/20** to enable PFC on the FCoE priority (IEEE 802.1p code point **011**), set the MRU value (2240 bytes), and set the cable length value (100 meters). No output stanza is needed because queue 3 is paused by default on priority 3, and we are not explicitly configuring output queue flow control for any other queues.

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe_p3_cnp input ieee-802.1 code-point 011 pfc mru 2240
user@switch# set congestion-notification-profile fcoe_p3_cnp input cable-length 100
```

7. Configure the CNP for interface **xe-0/0/21**. The input stanza enables PFC on the FCoE priority (IEEE 802.1p code point **101**), sets the MRU value (2240 bytes), and sets the cable length value (150 meters). The output stanza configures flow control on output queue 5 on the FCoE priority:

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe_p5_cnp input ieee-802.1 code-point 101 pfc mru 2240
user@switch# set congestion-notification-profile fcoe_p5_cnp input cable-length 150
user@switch# set congestion-notification-profile fcoe_p5_cnp output ieee-802.1 code-point 101 pfc flow-control-queue 5
```

8. Configure the CNP for interface **xe-0/0/22**. The input stanza enables PFC on the FCoE priorities (IEEE 802.1p code points **011** and **101**), sets the MRU value (2240 bytes), and sets the cable length value (100 meters). The output stanza configures flow control on output queues 3 and 5 on the FCoE priorities:

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe_p3_p5_cnp input ieee-802.1 code-point 011 pfc mru 2240
user@switch# set congestion-notification-profile fcoe_p3_p5_cnp input ieee-802.1 code-point 101 pfc mru 2240
user@switch# set congestion-notification-profile fcoe_p3_p5_cnp input cable-length 100
user@switch# set congestion-notification-profile fcoe_p3_p5_cnp output ieee-802.1 code-point 011 pfc flow-control-queue 3
user@switch# set congestion-notification-profile fcoe_p3_p5_cnp output ieee-802.1 code-point 101 pfc flow-control-queue 5
```

9. Apply each CNP to the appropriate interface:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/20 congestion-notification-profile fcoe_p3_cnp
```



```

user@switch# set interfaces xe-0/0/21 congestion-notification-profile fcoe_p5_cnp
user@switch# set interfaces xe-0/0/22 congestion-notification-profile fcoe_p3_p5_cnp

```

10. Configure the DCBX FCoE application and application map to apply to interface xe-0/0/21. Interface xe-0/0/21 uses priority 5 (IEEE 802.1p code point 101) for FCoE traffic, which requires DCBX to exchange FCoE application protocol TLVs on priority 5 on interface xe-0/0/21. Configure an application named **fcoe\_p5\_app** for FCoE traffic (EtherType **0x8906**) and configure an application map named **fcoe\_p5\_app\_map** to map the application to code point 101:

```

[edit]
user@switch# set applications application fcoe_p5_app ether-type 0x8906
user@switch# set policy-options application-maps fcoe_p5_app_map application
fcoe_p5_app code-points 101

```



**NOTE:** Interface xe-0/0/20 uses the default FCoE configuration (priority 3). DCBX exchanges protocol TLVs for the FCoE application by default, so you do not need to configure DCBX explicitly on interface xe-0/0/20.

11. Configure the DCBX FCoE application and application map to apply to interface xe-0/0/22. Interface xe-0/0/22 uses both priority 3 (IEEE 802.1p code point 011) and priority 5 for FCoE traffic, which requires DCBX to exchange FCoE application protocol TLVs on both priority 3 and priority 5. Configure an application named **fcoe\_all\_app** for FCoE traffic (EtherType **0x8906**) and configure an application map named **fcoe\_all\_app\_map** to map the application to code points 011 and 101:

```

[edit]
user@switch# set applications application fcoe_all_app ether-type 0x8906
user@switch# set policy-options application-maps fcoe_all_app_map application
fcoe_all_app code-points [011 101]

```

12. Apply the application maps to the interfaces xe-0/0/21 and xe-0/0/22 so that DCBX exchanges FCoE application TLVs on the correct code points on each interface:

```

[edit]
user@switch# set protocols dcbx interface xe-0/0/21 application-map fcoe_p5_app_map
user@switch# set protocols dcbx interface xe-0/0/22 application-map fcoe_all_app_map

```

## Verification

To verify the configuration and proper operation of the lossless forwarding classes and IEEE 802.1p priorities, perform these tasks:

- [Verifying the Forwarding Class Configuration on page 5073](#)
- [Verifying the Behavior Aggregate Classifier Configuration on page 5073](#)
- [Verifying the PFC Flow Control Configuration \(CNP\) on page 5074](#)
- [Verifying the Interface Configuration on page 5076](#)
- [Verifying the DCBX Application Configuration on page 5076](#)
- [Verifying the DCBX Application Map Configuration on page 5077](#)
- [Verifying the DCBX Application Protocol Exchange Interface Configuration on page 5077](#)



**Verifying the Forwarding Class Configuration**

**Purpose** Verify that the lossless forwarding class **fcoe1** has been created.

**Action** Show the forwarding class configuration by using the operational command **show class-of-service forwarding class**:

```
user@switch# show class-of-service forwarding-class
```

| Forwarding class | ID | Queue | Policing priority | No-Loss  |
|------------------|----|-------|-------------------|----------|
| best-effort      | 0  | 0     | normal            | Disabled |
| fcoe             | 1  | 3     | normal            | Enabled  |
| no-loss          | 2  | 4     | normal            | Enabled  |
| network-control  | 3  | 7     | normal            | Disabled |
| fcoe1            | 4  | 5     | normal            | Enabled  |
| mcast            | 8  | 8     | normal            | Disabled |

**Meaning** The **show class-of-service forwarding-class** command shows all of the forwarding classes. The command output shows that the **fcoe1** forwarding class is configured on output queue **5** with the no-loss packet drop attribute enabled.

Because we did not explicitly configure the default forwarding classes, they remain in their default state, including the lossless configuration of the **fcoe** and **no-loss** default forwarding classes.

**Verifying the Behavior Aggregate Classifier Configuration**

**Purpose** Verify that the three classifiers map the forwarding classes to the correct IEEE 802.1p code points (priorities) and packet loss priorities.

**Action** List the classifiers configured to support lossless FCoE transport using the operational mode command **show class-of-service classifier**:

```
user@switch> show class-of-service classifier
```

|                                                                   |                  |               |
|-------------------------------------------------------------------|------------------|---------------|
| Classifier: fcoe_p3, Code point type: ieee-802.1, Index: 13913    |                  |               |
| Code point                                                        | Forwarding class | Loss priority |
| 011                                                               | fcoe             | low           |
| Classifier: fcoe_p5, Code point type: ieee-802.1, Index: 63065    |                  |               |
| Code point                                                        | Forwarding class | Loss priority |
| 101                                                               | fcoe1            | low           |
| Classifier: fcoe_p3_p5, Code point type: ieee-802.1, Index: 10964 |                  |               |
| Code point                                                        | Forwarding class | Loss priority |
| 011                                                               | fcoe             | low           |
| 101                                                               | fcoe1            | low           |

**Meaning** The **show class-of-service classifier** command shows the IEEE 802.1p code points and the loss priorities that are mapped to the forwarding classes in each classifier. The command output shows that there are three classifiers, **fcoe\_p3**, **fcoe\_p5**, and **fcoe\_p3\_p5**.



Classifier **fcoe\_p3** maps code point **011** (priority 3) to default lossless forwarding class **fcoe** and a packet loss priority of **low**.

Classifier **fcoe\_p5** maps code point **101** (priority 5) to explicitly configured lossless forwarding class **fcoe1** and a packet loss priority of **low**.

Classifier **fcoe\_p3\_p5** maps code point **011** to default lossless forwarding class **fcoe** and a packet loss priority of **low**, and maps code point **101** to explicitly configured lossless forwarding class **fcoe1** and a packet loss priority of **low**.

### ***Verifying the PFC Flow Control Configuration (CNP)***

**Purpose** Verify that PFC is enabled on the correct input priorities and that flow control is configured on the correct output queues and priorities in each CNP.

**Action** List the congestion notification profiles using the operational mode command **show class-of-service congestion-notification**:

```
user@switch> show class-of-service congestion-notification
```

```
Name: fcoe_p3_cnp, Index: 12037
```

```
Type: Input
```

```
Cable Length: 100 m
```

| Priority | PFC      | MRU  |
|----------|----------|------|
| 000      | Disabled |      |
| 001      | Disabled |      |
| 010      | Disabled |      |
| 011      | Enabled  | 2240 |
| 100      | Disabled |      |
| 101      | Disabled |      |
| 110      | Disabled |      |
| 111      | Disabled |      |

```
Type: Output
```

| Priority | Flow-Control-Queues |
|----------|---------------------|
| 000      | 0                   |
| 001      | 1                   |
| 010      | 2                   |
| 011      | 3                   |
| 100      | 4                   |
| 101      | 5                   |
| 110      | 6                   |
| 111      | 7                   |

```
Name: fcoe_p3_p5_cnp, Index: 46484
```

```
Type: Input
```

```
Cable Length: 100 m
```

| Priority | PFC      | MRU  |
|----------|----------|------|
| 000      | Disabled |      |
| 001      | Disabled |      |
| 010      | Disabled |      |
| 011      | Enabled  | 2240 |



```

100      Disabled
101      Enabled      2240
110      Disabled
111      Disabled
Type: Output
Priority  Flow-Control-Queues
011
3
101
5

Name: fcoe_p5_cnp, Index: 12133
Type: Input
Cable Length: 150 m
Priority  PFC      MRU
000      Disabled
001      Disabled
010      Disabled
011      Disabled
100      Disabled
101      Enabled      2240
110      Disabled
111      Disabled
Type: Output
Priority  Flow-Control-Queues
101
5

```

**Meaning** The **show class-of-service congestion-notification** command shows the input and output stanzas of the three CNPs. For CNP **fcoe\_p3\_cnp**, the input stanza shows that PFC is enabled on IEEE 802.1p code point **011** (priority 3), the MRU is **2240** bytes, and the cable length is **100** meters. The CNP output stanza shows the default mapping of priorities to output queues.



**NOTE:** By default, only queues 3 and 4 are enabled to respond to pause messages from the connected peer. For queue 3 to respond to pause messages, priority 3 (code point 011) must be enabled for PFC in the input stanza. For queue 4 to respond to pause messages, priority 4 (code point 100) must be enabled for PFC in the input stanza. In this example, only queue 3 responds to pause messages from the connected peer on interfaces that use CNP **fcoe\_p3\_cnp**, because the input stanza enables PFC priority 3 only.

For CNP **fcoe\_p3\_p5\_cnp**, the input stanza shows that PFC is enabled on code points **011** and **101**, the MRU is **2240** bytes on both priorities, and the cable length is **100** meters. The CNP output stanza shows that output flow control is configured on queues **3** and **5** for code points **011** and **101**, respectively.

For CNP **fcoe\_p5\_cnp**, the input stanza shows that PFC is enabled on code point **101** (priority 5), the MRU is **2240** bytes, and the cable length is **150** meters. The CNP output stanza shows that output flow control is configured on queue **5** for code point **101** (priority 5).



### *Verifying the Interface Configuration*

**Purpose** Verify that the correct classifiers and congestion notification profiles are configured on the correct interfaces.

**Action** List the ingress interfaces using the operational mode commands **show configuration class-of-service interfaces xe-0/0/20**, **show configuration class-of-service interfaces xe-0/0/21**, and **show configuration class-of-service interfaces xe-0/0/22**:

```
user@switch> show configuration class-of-service interfaces xe-0/0/20
  congestion-notification-profile fcoe_p3_cnp;
  unit 0 {
    classifiers {
      ieee-802.1p fcoe_p3;
    }
  }
```

```
user@switch> show configuration class-of-service interfaces xe-0/0/21
  congestion-notification-profile fcoe_p5_cnp;
  unit 0 {
    classifiers {
      ieee-802.1p fcoe_p5;
    }
  }
```

```
user@switch> show configuration class-of-service interfaces xe-0/0/22
  congestion-notification-profile fcoe_p3_p5_cnp;
  unit 0 {
    classifiers {
      ieee-802.1p fcoe_p3_p5;
    }
  }
```

**Meaning** The **show configuration class-of-service interfaces xe-0/0/20** command shows that the congestion notification profile **fcoe\_p3\_cnp** is configured on the interface, and that the IEEE 802.1p classifier associated with the interface is **fcoe\_p3**.

The **show configuration class-of-service interfaces xe-0/0/21** command shows that the congestion notification profile **fcoe\_p5\_cnp** is configured on the interface, and that the IEEE 802.1p classifier associated with the interface is **fcoe\_p5**.

The **show configuration class-of-service interfaces xe-0/0/22** command shows that the congestion notification profile **fcoe\_p3\_p5\_cnp** is configured on the interface, and that the IEEE 802.1p classifier associated with the interface is **fcoe\_p3\_p5**.

### *Verifying the DCBX Application Configuration*

**Purpose** Verify that the two DCBX applications for FCoE are configured.

**Action** List the DCBX applications by using the configuration mode command **show applications**:

```
user@switch# show applications
  application fcoe_all_app {
    ether-type 0x8906;
```



```
application fcoe_p5_app {
    ether-type 0x8906;
```

**Meaning** The **show applications** configuration mode command shows all of the configured applications. The output shows that the application **fcoe\_all\_app** is configured with an EtherType of **0x8906** (the correct EtherType for FCoE traffic) and that the application **fcoe\_p5\_app** is also configured with an EtherType of **0x8906**.

#### *Verifying the DCBX Application Map Configuration*

**Purpose** Verify that the application maps are configured.

**Action** List the application maps by using the configuration mode command **show policy-options application-maps**:

```
user@switch# show policy-options application-maps
fcoe_all_app_map {
    application fcoe_all_app code-points [011 101];
}
fcoe_p5_app_map {
    application fcoe_p5_app code-points 101;
}
```

**Meaning** The **show policy-options application-maps** configuration mode command lists all of the configured application maps and the applications that belong to each application map. The output shows that there are two application maps.

Application map **fcoe\_all\_app\_map** consists of the application named **fcoe\_all\_app** mapped to IEEE 802.1p code points **011** (priority 3) and **101** (priority 5).

Application map **fcoe\_p5\_app\_map** consists of the application named **fcoe\_p5\_app** mapped to IEEE 802.1p code point **101** (priority 5).

#### *Verifying the DCBX Application Protocol Exchange Interface Configuration*

**Purpose** Verify that the application maps are applied to the correct interfaces.

**Action** List the application maps on each interface using the configuration mode command **show protocols dcbx**:

```
user@switch# show protocols dcbx
interface xe-0/0/21.0 {
    application-map fcoe_p5_app_map;
}
interface xe-0/0/22.0 {
    application-map fcoe_all_app_map;
}
```

**Meaning** The **show protocols dcbx** configuration mode command lists the application map association with interfaces. The output shows that interface **xe-0/0/21.0** uses application map **fcoe\_p5\_app\_map** and interface **xe-0/0/22.0** uses application map **fcoe\_all\_app\_map**.





**NOTE:** Because interface xe-0/0/20 uses the default lossless FCoE configuration, you do not configure application mapping to interface xe-0/0/20. The default configuration automatically exchanges application protocol TLVs for the default FCoE configuration on priority 3 (IEEE 802.1p code point 011).

**Related Documentation**

- [Example: Configuring Two or More Lossless FCoE Priorities on the Same FCoE Transit Switch Interface on page 5056](#)
- [Example: Configuring Lossless FCoE Traffic When the Converged Ethernet Network Does Not Use IEEE 802.1p Priority 3 for FCoE Traffic \(FCoE Transit Switch\) on page 5048](#)
- [Example: Configuring Lossless IEEE 802.1p Priorities on Ethernet Interfaces for Multiple Applications \(FCoE and iSCSI\) on page 5078](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)
- [Example: Configuring Unicast Classifiers on page 5014](#)
- [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
- [Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)

## Example: Configuring Lossless IEEE 802.1p Priorities on Ethernet Interfaces for Multiple Applications (FCoE and iSCSI)

Although the default configuration provides two lossless forwarding classes mapped to two different IEEE 802.1p priorities (code points), you can explicitly configure up to six lossless forwarding classes and map them to different priorities. You can support up to six different types of lossless traffic, and you can support the same type of traffic on different priorities in different parts of your converged network.

This example shows you how to configure two lossless forwarding classes for FCoE traffic and one lossless forwarding class for iSCSI traffic, and map the forwarding classes to three different priorities. (The converged Ethernet network includes two FCoE networks, each of which uses a different priority to identify FCoE traffic, and an iSCSI network.)

- [Requirements on page 5078](#)
- [Overview on page 5079](#)
- [Configuration on page 5083](#)
- [Verification on page 5087](#)

### Requirements

---

This example uses the following hardware and software components:

- One Juniper Networks QFX3500 Switch in transit switch (FIP snooping) mode



- Junos OS Release 12.3 or later for the QFX Series

## Overview

Some converged Ethernet networks support FCoE on more than one IEEE 802.1p priority and also require supporting other lossless traffic classes. Interfaces that carry multiple lossless forwarding classes need to support lossless behavior for the priorities mapped to those forwarding classes. To support the two FCoE forwarding classes and the iSCSI forwarding class used in this example, you need to configure:

- At least one lossless forwarding class for FCoE traffic (this example uses the default **fcoe** forwarding class as one of the two lossless FCoE forwarding classes, so we need to explicitly configure only one FCoE forwarding class)
- A lossless forwarding class for iSCSI traffic
- Behavior aggregate (BA) classifiers to map the lossless forwarding classes to the appropriate IEEE 802.1p code points (priorities) on each interface
- Congestion notification profiles (CNPs) for each interface to enable PFC on the FCoE and iSCSI code points at the interface ingress, and to configure PFC flow control on the interface egress so that the interface can respond to PFC messages received from the connected peer
- DCBX applications and an application map to support DCBX application TLV exchange for the FCoE and iSCSI traffic on the configured lossless priorities. By default, DCBX is enabled on all Ethernet interfaces for FCoE, but only on priority 3 (IEEE 802.1p code point 011). To support DCBX application TLV exchange when you are not using the default configuration, you must configure all of the applications and map them to interfaces and priorities.

The priorities specified in the BA classifiers, CNPs, and DCBX application map must match, or the configuration does not work. You must specify the same lossless FCoE forwarding class in each configuration and use the same IEEE 802.1p code point (priority) so that the FCoE traffic is properly classified into flows and so that those flows receive lossless treatment.

## Topology

This example shows how to configure two lossless FCoE traffic classes and one lossless iSCSI traffic class, map them to three different priorities, and configure flow control to ensure lossless behavior for those priorities on the interfaces. This example uses four Ethernet interfaces, xe-0/0/31, xe-0/0/32, xe-0/0/33, and xe-0/0/34:

- Interface xe-0/0/31 handles FCoE traffic on priority 3 (IEEE 802.1p code point 011) and iSCSI traffic on priority 4 (code point 100).
- Interface xe-0/0/32 handles FCoE traffic on priority 5 (code point 101) and iSCSI traffic on priority 4.
- Interface xe-0/0/33 handles FCoE traffic on priority 3 and priority 5.
- Interface xe-0/0/34 handles iSCSI traffic on priority 4.



Figure 191 on page 5080 shows the topology for this example, and Table 430 on page 5080 shows the configuration components for this example.

Figure 191: Topology of the Lossless FCoE and iSCSI Priorities Example

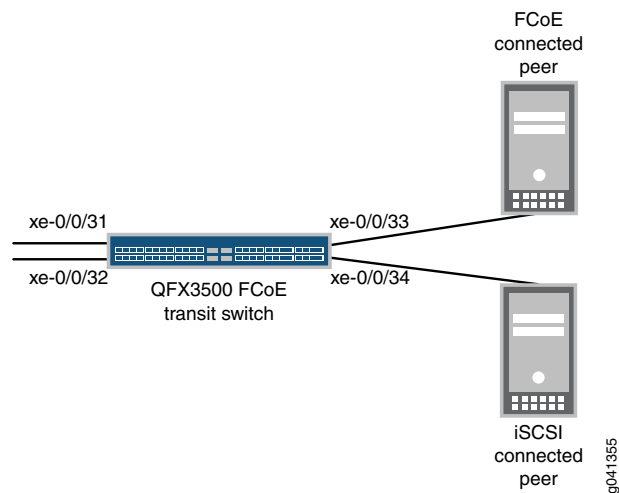


Table 430: Components of the Lossless FCoE and iSCSI Priorities Configuration Topology

| Component          | Settings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hardware           | QFX3500 switch                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Forwarding classes | <p>This example uses one explicitly configured lossless FCoE forwarding class, the default lossless FCoE forwarding class, and one explicitly configured iSCSI forwarding class.</p> <ul style="list-style-type: none"><li>iSCSI forwarding class:<br/>Name—<b>iscsi</b><br/>Queue mapping—queue 4<br/>Packet drop attribute—<b>no-loss</b></li><li>FCoE forwarding class (explicitly configured):<br/>Name—<b>fcoe1</b><br/>Queue mapping—queue 5<br/>Packet drop attribute—<b>no-loss</b></li></ul> <p><b>NOTE:</b> A lossless forwarding class can be mapped to any output queue. However, because the <b>fcoe1</b> forwarding class uses priority 5 in this example, matching that traffic to a forwarding class that uses queue 5 creates a configuration that is logical and easy to map because the priority and the queue are identified by the same number.</p> <ul style="list-style-type: none"><li>FCoE forwarding class (default)<br/>Name—<b>fcoe</b><br/>The default <b>fcoe</b> forwarding class is mapped to priority 3 (IEEE 802.1p code point 011) and to output queue 3 with a packet drop attribute of <b>no-loss</b>.</li></ul> |



**Table 430: Components of the Lossless FCoE and iSCSI Priorities Configuration Topology (*continued*)**

| Component      | Settings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BA classifiers | <p>Each interface requires a different classifier because each interface handles a different subset of FCoE traffic.</p> <ul style="list-style-type: none"> <li>Interface xe-0/0/31 classifier:<br/> Name—<b>fcoe_p3_iscsi</b><br/> FCoE priority mapping—Forwarding class <b>fcoe</b> mapped to code point <b>011</b> (IEEE 802.1p priority 3) and a packet loss priority of <b>low</b>.<br/> iSCSI priority mapping—Forwarding class <b>iscsi</b> mapped to code point <b>100</b> (priority 4) and a packet loss priority of <b>low</b>.</li> <li>Interface xe-0/0/32 classifier:<br/> Name—<b>fcoe_p5_iscsi</b><br/> FCoE priority mapping—Forwarding class <b>fcoe1</b> mapped to code point <b>101</b> (IEEE 802.1p priority 5) and a packet loss priority of <b>low</b>.<br/> iSCSI priority mapping—Forwarding class <b>iscsi</b> mapped to code point <b>100</b> (priority 4) and a packet loss priority of <b>low</b>.</li> <li>Interface xe-0/0/33 classifier:<br/> Name—<b>fcoe_p3_p5</b><br/> FCoE priority mapping—Forwarding class <b>fcoe1</b> mapped to code point <b>101</b> (priority 5) and a packet loss priority of <b>low</b>, and forwarding class <b>fcoe</b> mapped to code point <b>011</b> and a packet loss priority of <b>low</b>.</li> <li>Interface xe-0/0/34 classifier:<br/> Name—<b>iscsi_classifier</b><br/> iSCSI priority mapping—Forwarding class <b>iscsi</b> mapped to code point <b>100</b> (priority 4) and a packet loss priority of <b>low</b>.</li> </ul> |



**Table 430: Components of the Lossless FCoE and iSCSI Priorities Configuration Topology (continued)**

| Component                | Settings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PFC configuration (CNPs) | <p>Each interface requires a different CNP because each interface handles a different subset of FCoE and iSCSI traffic, and must pause that traffic on different priorities.</p> <ul style="list-style-type: none"> <li>Interface xe-0/0/31 CNP:<br/> CNP name—<b>fcoe_p3_cnp</b><br/> Input CNP code points—<b>011</b> and <b>100</b><br/> MRU—2240 bytes for code point <b>011</b>, default value (2500 bytes) for code point <b>100</b><br/> Cable length—100 meters</li> </ul> <p><b>NOTE:</b> On interface xe-0/0/31, the FCoE forwarding class is mapped to queue 3 and priority 3 (code point 011), and the iSCSI forwarding class is mapped to queue 4 and priority 4 (code point 100). Therefore, interface xe-0/0/31 does not require an output CNP configuration because queue 3 and queue 4 are enabled for PFC flow control by default on code points 011 and 100, respectively.</p> <ul style="list-style-type: none"> <li>Interface xe-0/0/32 CNP:<br/> CNP name—<b>fcoe_p5_cnp</b><br/> Input CNP code points—<b>100</b> and <b>101</b><br/> MRU—Default value (2500 bytes) for code point <b>100</b>, <b>2240</b> bytes for code point <b>101</b><br/> Cable length—150 meters<br/> Output CNP code points—<b>100</b> and <b>101</b><br/> Output CNP flow control queues—<b>4</b> and <b>5</b></li> <li>Interface xe-0/0/33 CNP:<br/> CNP name—<b>fcoe_p3_p5_cnp</b><br/> Input CNP code points—<b>011</b> and <b>101</b><br/> MRU—2240 bytes (both priorities)<br/> Cable length—100 meters<br/> Output CNP code points—<b>011</b> and <b>101</b><br/> Output CNP flow control queues—<b>3</b> and <b>5</b></li> <li>Interface xe-0/0/34 CNP:<br/> CNP name—<b>iscsi_cnp</b><br/> Input CNP code point—<b>100</b><br/> MRU—2500 bytes (default value)<br/> Cable length—100 meters</li> </ul> <p><b>NOTE:</b> On interface xe-0/0/34, the iSCSI forwarding class is mapped to queue 4 and priority 4 (code point 100). Interface xe-0/0/34 does not require an output CNP configuration because queue 4 is enabled for PFC flow control by default on code point 100.</p> <p><b>NOTE:</b> When you apply a CNP with an explicit output queue flow control configuration to an interface, the explicit CNP overwrites the default output CNP. The output queues that are enabled for PFC pause in the default configuration (queues 3 and 4) are not enabled for pause unless they are included in the explicitly configured output CNP.</p> |



**Table 430: Components of the Lossless FCoE and iSCSI Priorities Configuration Topology (*continued*)**

| Component                | Settings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DCBX application mapping | <p>This example requires configuring applications for FCoE and iSCSI, including them in the same application map, and applying the application map to all four interfaces.</p> <p>Application map name—<b>dcbx_iscsi_fcoe_app_map</b></p> <ul style="list-style-type: none"> <li>FCoE application name—<b>fcoe_app</b><br/>Application ether-type—<b>0x8906</b><br/>Application map code points—<b>011</b> and <b>101</b></li> <li>iSCSI application name—<b>iscsi_app</b><br/>Application protocol type—<b>tcp</b><br/>Application destination port—<b>3260</b><br/>Application map code point—<b>100</b></li> </ul> <p><b>NOTE:</b> LLDP and DCBX must be enabled on the interface. By default, LLDP and DCBX are enabled on all Ethernet interfaces.</p> |



**NOTE:** This example does not include scheduling (bandwidth allocation) configuration or the FIP snooping configuration. This examples focuses only on the lossless FCoE priority configuration.

### Configuration

#### CLI Quick Configuration

To quickly configure two lossless FCoE forwarding classes and one lossless iSCSI forwarding class and map them to different priorities, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set class-of-service forwarding-classes class iscsi queue-num 4 no-loss
set class-of-service forwarding-classes class fcoe1 queue-num 5 no-loss
set class-of-service classifiers ieee-802.1 fcoe_p3_iscsi forwarding-class fcoe loss-priority low
code-points 011
set class-of-service classifiers ieee-802.1 fcoe_p3_iscsi forwarding-class iscsi loss-priority low
code-points 100
set class-of-service classifiers ieee-802.1 fcoe_p5_iscsi forwarding-class iscsi loss-priority low
code-points 100
set class-of-service classifiers ieee-802.1 fcoe_p5_iscsi forwarding-class fcoe1 loss-priority low
code-points 101
set class-of-service classifiers ieee-802.1 fcoe_p3_p5 forwarding-class fcoe loss-priority low
code-points 011
set class-of-service classifiers ieee-802.1 fcoe_p3_p5 forwarding-class fcoe1 loss-priority low
code-points 101
set class-of-service classifiers ieee-802.1 iscsi_classifier forwarding-class iscsi loss-priority low
code-points 100
set class-of-service interfaces xe-0/0/31 unit 0 classifiers ieee-802.1 fcoe_p3_iscsi
set class-of-service interfaces xe-0/0/32 unit 0 classifiers ieee-802.1 fcoe_p5_iscsi
set class-of-service interfaces xe-0/0/33 unit 0 classifiers ieee-802.1 fcoe_p3_p5set
class-of-service interfaces xe-0/0/34 unit 0 classifiers ieee-802.1 iscsi_classifier
```



```

set class-of-service congestion-notification-profile fcoe_p3_cnp input ieee-802.1 code-point 011
pfc mru 2240
set class-of-service congestion-notification-profile fcoe_p3_cnp input ieee-802.1 code-point 100
pfc
set class-of-service congestion-notification-profile fcoe_p3_cnp input cable-length 100
set class-of-service congestion-notification-profile fcoe_p5_cnp input ieee-802.1 code-point 100
pfc
set class-of-service congestion-notification-profile fcoe_p5_cnp input ieee-802.1 code-point 101
pfc mru 2240
set class-of-service congestion-notification-profile fcoe_p5_cnp input cable-length 150
set class-of-service congestion-notification-profile fcoe_p5_cnp output ieee-802.1 code-point
100 pfc flow-control-queue 4
set class-of-service congestion-notification-profile fcoe_p5_cnp output ieee-802.1 code-point
101 pfc flow-control-queue 5
set class-of-service congestion-notification-profile fcoe_p3_p5_cnp input ieee-802.1 code-point
011 pfc mru 2240
set class-of-service congestion-notification-profile fcoe_p3_p5_cnp input ieee-802.1 code-point
101 pfc mru 2240
set class-of-service congestion-notification-profile fcoe_p3_p5_cnp input cable-length 100
set class-of-service congestion-notification-profile fcoe_p3_p5_cnp output ieee-802.1 code-point
011 pfc flow-control-queue 3
set class-of-service congestion-notification-profile fcoe_p3_p5_cnp output ieee-802.1 code-point
101 pfc flow-control-queue 5
set class-of-service congestion-notification-profile iscsi_cnp input ieee-802.1 code-point 100 pfc
set class-of-service congestion-notification-profile iscsi_cnp input cable-length 100
set class-of-service interfaces xe-0/0/31 congestion-notification-profile fcoe_p3_cnp
set class-of-service interfaces xe-0/0/32 congestion-notification-profile fcoe_p5_cnp
set class-of-service interfaces xe-0/0/33 congestion-notification-profile fcoe_p3_p5_cnp
set class-of-service interfaces xe-0/0/34 congestion-notification-profile iscsi_cnp
set applications application iscsi_app protocol tcp destination-port 3260
set applications application fcoe_app ether-type 0x8906
set policy-options application-maps dcbx_iscsi_fcoe_app_map application iscsi_app code-points
100
set policy-options application-maps dcbx_iscsi_fcoe_app_map application fcoe_app code-points
[011 101]
set protocols dcbx interface xe-0/0/31 application-map dcbx_iscsi_fcoe_app_map
set protocols dcbx interface xe-0/0/32 application-map dcbx_iscsi_fcoe_app_map
set protocols dcbx interface xe-0/0/33 application-map dcbx_iscsi_fcoe_app_map
set protocols dcbx interface xe-0/0/34 application-map dcbx_iscsi_fcoe_app_map

```

### Step-by-Step Procedure

To configure two lossless forwarding classes for FCoE traffic and one lossless forwarding class for iSCSI traffic, classify the traffic into the three forwarding classes, configure congestion notification profiles to enable PFC on the FCoE priorities and output queues, and configure DCBX application protocol TLV exchange for traffic on both FCoE priorities:

1. Configure lossless forwarding classes **iscsi** for iSCSI traffic and **fcoe1** for FCoE traffic (this example uses the default **fcoe** forwarding class as the other lossless FCoE forwarding class) and map them to output queues:

```

[edit class-of-service]
user@switch# set forwarding-classes class iscsi queue-num 4 no-loss
user@switch# set forwarding-classes class fcoe1 queue-num 5 no-loss

```

2. Configure the ingress classifier (**fcoe\_p3\_iscsi**) for interface **xe-0/0/31**. The classifier maps the FCoE priority (code point **011**) to lossless FCoE forwarding class **fcoe** and the iSCSI priority (code point **100**) to lossless iSCSI forwarding class **iscsi**:

```

[edit class-of-service classifiers]

```



```

user@switch# set ieee-802.1 fcoe_p3_iscsi forwarding-class fcoe loss-priority low
code-points 011
user@switch# set ieee-802.1 fcoe_p3_iscsi forwarding-class iscsi loss-priority low
code-points 100

```

3. Configure the ingress classifier (**fcoe\_p5\_iscsi**) for interface **xe-0/0/32**. The classifier maps the FCoE priority (code point **101**) to lossless FCoE forwarding class **fcoe1** and the iSCSI priority (code point **100**) to lossless iSCSI forwarding class **iscsi**:

```

[edit class-of-service classifiers]
user@switch# set ieee-802.1 fcoe_p5_iscsi forwarding-class iscsi loss-priority low
code-points 100
user@switch# set ieee-802.1 fcoe_p5_iscsi forwarding-class fcoe1 loss-priority low
code-points 101

```

4. Configure the ingress classifier (**fcoe\_p3\_p5**) for interface **xe-0/0/33**. The classifier maps the two FCoE priorities (code points **011** and **101**) to lossless FCoE forwarding classes **fcoe** and **fcoe1**, respectively:

```

[edit class-of-service classifiers]
user@switch# set ieee-802.1 fcoe_p3_p5 forwarding-class fcoe loss-priority low code-points
011
user@switch# set ieee-802.1 fcoe_p3_p5 forwarding-class fcoe1 loss-priority low code-points
101

```

5. Configure the ingress classifier (**iscsi\_classifier**) for interface **xe-0/0/34**. The classifier maps the iSCSI priority (code point **101**) to lossless iSCSI forwarding class **iscsi**:

```

[edit class-of-service classifiers]
user@switch# set ieee-802.1 iscsi_classifier forwarding-class iscsi loss-priority low
code-points 100

```

6. Apply each classifier to the appropriate interface:

```

[edit class-of-service]
user@switch# set interfaces xe-0/0/31 unit 0 classifiers ieee-802.1 fcoe_p3_iscsi
user@switch# set interfaces xe-0/0/32 unit 0 classifiers ieee-802.1 fcoe_p5_iscsi
user@switch# set interfaces xe-0/0/33 unit 0 classifiers ieee-802.1 fcoe_p3_p5
user@switch# set interfaces xe-0/0/34 unit 0 classifiers ieee-802.1 iscsi_classifier

```

7. Configure the CNP input stanza for interface **xe-0/0/31** to enable PFC on the FCoE and iSCSI priorities that the interface handles (code points **011** and **100**), set the MRU value for the FCoE traffic (2240 bytes), and set the cable length value (100 meters). No output stanza is needed because queues 3 and 4 are paused by default on priorities 3 and 4, respectively, and we are not explicitly configuring output queue flow control for any other queues.

```

[edit class-of-service]
user@switch# set congestion-notification-profile fcoe_p3_cnp input ieee-802.1 code-point
011 pfc mru 2240
user@switch# set congestion-notification-profile fcoe_p3_cnp input ieee-802.1 code-point
100 pfc
user@switch# set congestion-notification-profile fcoe_p3_cnp input cable-length 100

```

8. Configure the CNP for interface **xe-0/0/32**. The input stanza enables PFC on the FCoE priority (code point **101**), sets the MRU value for FCoE traffic (2240 bytes), enables PFC on the iSCSI priority (code point **100**), and sets the cable length value (150 meters). The output stanza configures flow control on output queue 5 on the FCoE priority and on output queue 4 on the iSCSI priority:



```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe_p5_cnp input ieee-802.1 code-point
100 pfc
user@switch# set congestion-notification-profile fcoe_p5_cnp input ieee-802.1 code-point
101 pfc mru 2240
user@switch# set congestion-notification-profile fcoe_p5_cnp input cable-length 150
user@switch# set congestion-notification-profile fcoe_p5_cnp output ieee-802.1 code-point
100 pfc flow-control-queue 4
user@switch# set congestion-notification-profile fcoe_p5_cnp output ieee-802.1 code-point
101 pfc flow-control-queue 5
```

9. Configure the CNP for interface xe-0/0/33. The input stanza enables PFC on the FCoE priorities (IEEE 802.1p code points 011 and 101), sets the MRU value (2240 bytes), and sets the cable length value (100 meters). The output stanza configures flow control on output queues 3 and 5 on the FCoE priorities:

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe_p3_p5_cnp input ieee-802.1
code-point 011 pfc mru 2240
user@switch# set congestion-notification-profile fcoe_p3_p5_cnp input ieee-802.1
code-point 101 pfc mru 2240
user@switch# set congestion-notification-profile fcoe_p3_p5_cnp input cable-length 100
user@switch# set congestion-notification-profile fcoe_p3_p5_cnp output ieee-802.1
code-point 011 pfc flow-control-queue 3
user@switch# set congestion-notification-profile fcoe_p3_p5_cnp output ieee-802.1
code-point 101 pfc flow-control-queue 5
```

10. Configure the CNP input stanza for interface xe-0/0/34 to enable PFC on the iSCSI priority (code point 100) and set the cable length value (100 meters). No output stanza is needed because queue 4 is paused by default on priority 4, and we are not explicitly configuring output queue flow control for any other queues.

```
[edit class-of-service]
user@switch# set congestion-notification-profile iscsi_cnp input ieee-802.1 code-point
100 pfc
user@switch# set congestion-notification-profile iscsi_cnp input cable-length 100
```

11. Apply each CNP to the appropriate interface:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/31 congestion-notification-profile fcoe_p3_cnp
user@switch# set interfaces xe-0/0/32 congestion-notification-profile fcoe_p5_cnp
user@switch# set interfaces xe-0/0/33 congestion-notification-profile fcoe_p3_p5_cnp
user@switch# set interfaces xe-0/0/34 congestion-notification-profile iscsi_cnp
```

12. Configure the DCBX applications for FCoE and iSCSI to map to the interfaces so that DCBX can exchange application protocol TLVs on the IEEE 802.1p priorities used for FCoE and iSCSI traffic:

```
[edit]
user@switch# set applications application fcoe_app ether-type 0x8906
user@switch# set applications application iscsi_app protocol tcp destination-port 3260
```

13. Configure a DCBX application map to map the FCoE and iSCSI applications to the correct priorities:

```
[edit]
user@switch# set policy-options application-maps dcbx_iscsi_fcoe_app_map application
fcoe_app code-points [011 101]
user@switch# set policy-options application-maps dcbx_iscsi_fcoe_app_map application
iscsi_app code-points 100
```



14. Apply the application map to the interfaces so that DCBX exchanges FCoE application TLVs on the correct code points:

```
[edit]
user@switch# set protocols dcbx interface xe-0/0/31 application-map
dcbx_iscsi_fcoe_app_map
user@switch# set protocols dcbx interface xe-0/0/32 application-map
dcbx_iscsi_fcoe_app_map
user@switch# set protocols dcbx interface xe-0/0/33 application-map
dcbx_iscsi_fcoe_app_map
user@switch# set protocols dcbx interface xe-0/0/34 application-map
dcbx_iscsi_fcoe_app_map
```

### Verification

To verify the configuration and proper operation of the lossless forwarding classes and IEEE 802.1p priorities, perform these tasks:

- [Verifying the Forwarding Class Configuration on page 5087](#)
- [Verifying the Behavior Aggregate Classifier Configuration on page 5088](#)
- [Verifying the PFC Flow Control Configuration \(CNP\) on page 5088](#)
- [Verifying the Interface Configuration on page 5091](#)
- [Verifying the DCBX Application Configuration on page 5092](#)
- [Verifying the DCBX Application Map Configuration on page 5093](#)
- [Verifying the DCBX Application Protocol Exchange Interface Configuration on page 5093](#)

#### Verifying the Forwarding Class Configuration

**Purpose** Verify that the lossless forwarding classes **iscsi** and **fcoe1** have been created and that the default lossless forwarding class **fcoe** is still enabled for lossless transport.

**Action** Show the forwarding class configuration by using the operational command **show class-of-service forwarding-class**:

```
user@switch> show class-of-service forwarding-class
```

| Forwarding class | ID | Queue | Policing priority | No-Loss  |
|------------------|----|-------|-------------------|----------|
| best-effort      | 0  | 0     | normal            | Disabled |
| fcoe             | 1  | 3     | normal            | Enabled  |
| iscsi            | 2  | 4     | normal            | Enabled  |
| network-control  | 3  | 7     | normal            | Disabled |
| fcoe1            | 4  | 5     | normal            | Enabled  |
| mcast            | 8  | 8     | normal            | Disabled |

**Meaning** The **show class-of-service forwarding-class** command shows all of the forwarding classes. The command output shows that the **iscsi** and **fcoe1** forwarding classes are configured on output queues 4 and 5, respectively, with the no-loss packet drop attribute enabled.



Because we did not explicitly configure the default **fcoe** forwarding class, it remains in its default state (lossless configuration).

### *Verifying the Behavior Aggregate Classifier Configuration*

**Purpose** Verify that the four classifiers map the forwarding classes to the correct IEEE 802.1p code points (priorities) and packet loss priorities.

**Action** List the classifiers configured to support lossless FCoE transport using the operational mode command **show class-of-service classifier**:

```
user@switch> show class-of-service classifier
Classifier: fcoe_p3_iscsi, Code point type: ieee-802.1, Index: 13915
  Code point  Forwarding class  Loss priority
  011         fcoe             low
  100         iscsi            low
```

```
Classifier: fcoe_p5_iscsi, Code point type: ieee-802.1, Index: 62035
  Code point  Forwarding class  Loss priority
  100         iscsi            low
  101         fcoe1            low
```

```
Classifier: fcoe_p3_p5, Code point type: ieee-802.1, Index: 17774
  Code point  Forwarding class  Loss priority
  011         fcoe             low
  101         fcoe1            low
```

```
Classifier: iscsi_classifier, Code point type: ieee-802.1, Index: 31635
  Code point  Forwarding class  Loss priority
  100         iscsi            low
```

**Meaning** The **show class-of-service classifier** command shows the IEEE 802.1p code points and the loss priorities that are mapped to the forwarding classes in each classifier. The command output shows that there are four classifiers, **fcoe\_p3\_iscsi**, **fcoe\_p5\_iscsi**, **fcoe\_p3\_p5**, and **iscsi\_classifier**.

Classifier **fcoe\_p3\_iscsi** maps code point **011** (priority 3) to default lossless forwarding class **fcoe** and a packet loss priority of **low**, and code point **100** (priority 4) to explicitly configured lossless forwarding class **iscsi**.

Classifier **fcoe\_p5\_iscsi** maps code point **100** to explicitly configured forwarding class **iscsi** and a packet loss priority of **low**, and code point **101** (priority 5) to explicitly configured lossless forwarding class **fcoe1** and a packet loss priority of **low**.

Classifier **fcoe\_p3\_p5** maps code point **011** to default lossless forwarding class **fcoe** and a packet loss priority of **low**, and maps code point **101** to explicitly configured lossless forwarding class **fcoe1** and a packet loss priority of **low**.

Classifier **iscsi\_classifier** maps code point **100** to explicitly configured forwarding class **iscsi** and a packet loss priority of **low**.

### *Verifying the PFC Flow Control Configuration (CNP)*

**Purpose** Verify that PFC is enabled on the correct input priorities and that flow control is configured on the correct output queues and priorities in each CNP.



**Action** List the congestion notification profiles using the operational mode command **show class-of-service congestion-notification**:

```
user@switch> show class-of-service congestion-notification
```

```
Name: fcoe_p3_cnp, Index: 12037
```

```
Type: Input
```

```
Cable Length: 100 m
```

| Priority | PFC      | MRU  |
|----------|----------|------|
| 000      | Disabled |      |
| 001      | Disabled |      |
| 010      | Disabled |      |
| 011      | Enabled  | 2240 |
| 100      | Enabled  | 9216 |
| 101      | Disabled |      |
| 110      | Disabled |      |
| 111      | Disabled |      |

```
Type: Output
```

| Priority | Flow-Control-Queues |
|----------|---------------------|
| 000      |                     |
|          | 0                   |
| 001      |                     |
|          | 1                   |
| 010      |                     |
|          | 2                   |
| 011      |                     |
|          | 3                   |
| 100      |                     |
|          | 4                   |
| 101      |                     |
|          | 5                   |
| 110      |                     |
|          | 6                   |
| 111      |                     |
|          | 7                   |

```
Name: fcoe_p3_p5_cnp, Index: 46484
```

```
Type: Input
```

```
Cable Length: 100 m
```

| Priority | PFC      | MRU  |
|----------|----------|------|
| 000      | Disabled |      |
| 001      | Disabled |      |
| 010      | Disabled |      |
| 011      | Enabled  | 2240 |
| 100      | Disabled |      |
| 101      | Enabled  | 2240 |
| 110      | Disabled |      |
| 111      | Disabled |      |

```
Type: Output
```

| Priority | Flow-Control-Queues |
|----------|---------------------|
| 011      |                     |
|          | 3                   |
| 101      |                     |
|          | 5                   |

```
Name: fcoe_p5_cnp, Index: 12133
```

```
Type: Input
```

```
Cable Length: 150 m
```

| Priority | PFC      | MRU |
|----------|----------|-----|
| 000      | Disabled |     |
| 001      | Disabled |     |
| 010      | Disabled |     |



```
011      Disabled
100      Enabled      9216
101      Enabled      2240
110      Disabled
111      Disabled
Type: Output
100
      4
101
      5

Name: iscsi_cnp, Index: 19342
Type: Input
Cable Length: 100 m
Priority  PFC      MRU
000      Disabled
001      Disabled
010      Disabled
011      Disabled
100      Enabled      9216
101      Disabled
110      Disabled
111      Disabled
Type: Output
Priority  Flow-Control-Queues
000
      0
001
      1
010
      2
011
      3
100
      4
101
      5
110
      6
111
      7
```

**Meaning** The **show class-of-service congestion-notification** command shows the input and output stanzas of the four CNPs.

For CNP **fcoe\_p3\_cnp**, the input stanza shows that PFC is enabled on IEEE 802.1p code point **011** (priority 3) with an MRU of **2240** bytes, and cable length of **100** meters. The input stanza also shows that PFC is enabled on code point **100** (priority 4) with the default MRU value of **9216** bytes. The CNP output stanza shows the default mapping of priorities to output queues because no explicit output CNP is configured.





**NOTE:** By default, only queues 3 and 4 are enabled respond to pause messages from the connected peer. For queue 3 to respond to pause messages, priority 3 (code point 011) must be enabled for PFC in the input stanza. For queue 4 to respond to pause messages, priority 4 (code point 100) must be enabled for PFC in the input stanza. In this example, only queues 3 and 4 respond to pause messages from the connected peer on interfaces that use CNP `fcoe_p3_cnp` because the input stanza enables PFC only on priorities 3 and 4.

For CNP `fcoe_p3_p5_cnp`, the input stanza shows that PFC is enabled on code points 011 and 101 (priority 5), the MRU is 2240 bytes on both priorities, and the cable length is 100 meters. The CNP output stanza shows that output flow control is configured on queues 3 and 5 for code points 011 and 101, respectively.

For CNP `fcoe_p5_cnp`, the input stanza shows that PFC is enabled on code points 100 and 101. The MRU for code point 101 (FCoE traffic) is 2240 bytes and the MRU for code point 100 is 9216. The interface cable length is 150 meters. The CNP output stanza shows that output flow control is configured on queue 4 for code point 100 and on queue 5 for code point 101.

For CNP `iscsi_cnp`, the input stanza shows that PFC is enabled on code point 100, the MRU value is 9216 bytes, and the interface cable length is 100 meters. The CNP output stanza shows the default mapping of priorities to output queues because no explicit output CNP is configured.

### *Verifying the Interface Configuration*

**Purpose** Verify that the correct classifiers and congestion notification profiles are configured on the correct interfaces.

**Action** List the ingress interfaces using the operational mode commands `show configuration class-of-service interfaces xe-0/0/31`, `show configuration class-of-service interfaces xe-0/0/32`, `show configuration class-of-service interfaces xe-0/0/33`, and `show configuration class-of-service interfaces xe-0/0/34`:

```
user@switch> show configuration class-of-service interfaces xe-0/0/31
congestion-notification-profile fcoe_p3_cnp;
unit 0 {
    classifiers {
        ieee-802.1 fcoe_p3_iscsi;
    }
}
```

```
user@switch> show configuration class-of-service interfaces xe-0/0/32
congestion-notification-profile fcoe_p5_cnp;
unit 0 {
    classifiers {
        ieee-802.1 fcoe_p5_iscsi;
```



```
    }  
  }  
  
user@switch> show configuration class-of-service interfaces xe-0/0/33  
congestion-notification-profile fcoe_p3_p5_cnp;  
unit 0 {  
  classifiers {  
    ieee-802.1 fcoe_p3_p5;  
  }  
}  
  
user@switch> show configuration class-of-service interfaces xe-0/0/34  
congestion-notification-profile iscsi_cnp;  
unit 0 {  
  classifiers {  
    ieee-802.1 iscsi_classifier;  
  }  
}
```

**Meaning** The **show configuration class-of-service interfaces xe-0/0/31** command shows that the congestion notification profile **fcoe\_p3\_cnp** is configured on the interface, and that the IEEE 802.1p classifier associated with the interface is **fcoe\_p3\_iscsi**.

The **show configuration class-of-service interfaces xe-0/0/32** command shows that the congestion notification profile **fcoe\_p5\_cnp** is configured on the interface, and that the IEEE 802.1p classifier associated with the interface is **fcoe\_p5\_iscsi**.

The **show configuration class-of-service interfaces xe-0/0/33** command shows that the congestion notification profile **fcoe\_p3\_p5\_cnp** is configured on the interface, and that the IEEE 802.1p classifier associated with the interface is **fcoe\_p3\_p5**.

The **show configuration class-of-service interfaces xe-0/0/34** command shows that the congestion notification profile **iscsi\_cnp** is configured on the interface, and that the IEEE 802.1p classifier associated with the interface is **iscsi\_classifier**.

#### *Verifying the DCBX Application Configuration*

**Purpose** Verify that the DCBX applications for FCoE and iSCSI are configured.

**Action** List the DCBX applications by using the configuration mode command **show applications**:

```
user@switch# show applications  
application iscsi_app {  
  protocol tcp;  
  destination-port 3260;  
}  
application fcoe_app {  
  ether-type 0x8906;
```

**Meaning** The **show applications** configuration mode command shows all of the configured applications. The output shows that the application **iscsi\_app** is configured with a protocol value of **tcp** and a destination port value of **3260**, and that the application **fcoe\_app** is configured with an EtherType of **0x8906** (the correct EtherType for FCoE traffic).



*Verifying the DCBX Application Map Configuration*

- Purpose** Verify that the application map is configured.
- Action** List the application maps by using the configuration mode command **show policy-options application-maps**:
- ```
user@switch# show policy-options application-maps
dcbx-iscsi-fcoe-app-map {
    application iscsi_app code-points 100;
    application fcoe_app code-points [011 101];
}
```
- Meaning** The **show policy-options application-maps** configuration mode command lists all of the configured application maps and the applications that belong to each application map. The output shows that there is one application map named **dcbx-iscsi-fcoe\_app\_map**. It consists of the application **iscsi\_app** mapped to code point **100** and the application **fcoe\_app** mapped to code points **011** and **101**.

*Verifying the DCBX Application Protocol Exchange Interface Configuration*

- Purpose** Verify that the application maps are applied to the correct interfaces.
- Action** List the application maps on each interface using the configuration mode command **show protocols dcbx**:
- ```
user@switch# show protocols dcbx
interface xe-0/0/31.0 {
    application-map dcbx-iscsi-fcoe-app-map;
}
interface xe-0/0/32.0 {
    application-map dcbx-iscsi-fcoe-app-map;
}
interface xe-0/0/33.0 {
    application-map dcbx-iscsi-fcoe-app-map;
}
interface xe-0/0/34.0 {
    application-map dcbx-iscsi-fcoe-app-map;
}
```
- Meaning** The **show protocols dcbx** configuration mode command lists the application map association with interfaces. The output shows that all four interfaces use the application map **dcbx-iscsi-fcoe-app-map**.
- Related Documentation**
- [Example: Configuring Two or More Lossless FCoE Priorities on the Same FCoE Transit Switch Interface on page 5056](#)
  - [Example: Configuring Lossless FCoE Traffic When the Converged Ethernet Network Does Not Use IEEE 802.1p Priority 3 for FCoE Traffic \(FCoE Transit Switch\) on page 5048](#)
  - [Example: Configuring Two or More Lossless FCoE IEEE 802.1p Priorities on Different FCoE Transit Switch Interfaces on page 5065](#)
  - [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)



- [Example: Configuring Unicast Classifiers on page 5014](#)
- [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
- [Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)

### Example: Configuring IEEE 802.1p Priority Remapping on an FCoE-FC Gateway

FCoE traffic typically uses IEEE 802.1p priority 3 (code point 011). However, if your FCoE network uses a different IEEE 802.1p priority than priority 3 for FCoE traffic, then you can use priority remapping to classify FCoE traffic into a lossless forwarding class mapped to that priority. You specify the lossless forwarding class used for the FCoE traffic by configuring a fixed classifier and applying it to the native FC (NP\_Port) interface. All traffic received from the FC SAN on that NP\_Port interface is classified into the forwarding class specified in the fixed classifier.

When native FC interfaces on the FCoE-FC gateway encapsulate incoming FC traffic in Ethernet to create FCoE frames, by default they assign IEEE 802.1p code point 011 to the FCoE traffic, forward the traffic internally to the gateway Ethernet interfaces, and then forward the traffic to the FCoE network. Setting a rewrite value for the IEEE 802.1p code point configures the gateway native FC interface to assign the rewrite value priority to the FCoE frames when the native FC interface forwards the FCoE frames to the gateway Ethernet interface. Instead of a priority of 3, the FCoE frames use the priority specified in the rewrite value.

You can configure one rewrite value per native FC interface. Each native FC interface can use a different rewrite value.

This example shows how to configure FCoE priority remapping for a converged Ethernet network that uses priority 5 (IEEE code point 101) for FCoE traffic. If your network uses priority 3 for FCoE traffic, then you do not need to remap the FCoE priority, because the default configuration supports lossless FCoE transport on priority 3.

- [Requirements on page 5094](#)
- [Overview on page 5095](#)
- [Configuration on page 5098](#)
- [Verification on page 5099](#)

#### Requirements

---

This example uses the following hardware and software components:

- One Juniper Networks QFX3500 Switch
- Junos OS Release 12.3 or later for the QFX Series



## Overview

Native FC interfaces on an FCoE-FC gateway receive native FC traffic from the FC SAN and encapsulate it in Ethernet to create FCoE frames. Priority remapping enables you to map the encapsulated FC traffic (the FCoE traffic) to any IEEE 802.1p priority.

To support lossless FCoE traffic flows, you must configure the remapped priority correctly on the native FC interfaces and also on the Ethernet interfaces that connect to the FCoE network. Achieving lossless behavior for FCoE traffic when you remap the FCoE priority requires configuring:

- A lossless forwarding class for FCoE traffic (or using the default **fcoe** forwarding class)
- A behavior aggregate (BA) classifier on the FCoE Ethernet interfaces to map the FCoE forwarding class to the IEEE 802.1p code points (priority) used for FCoE traffic on the FCoE network (the ingress classifier priority for the forwarding class must be the same as the rewrite value priority)
- A fixed classifier on the FCoE-FC gateway FC interface that maps all traffic from the FC network into the lossless FCoE forwarding class (the forwarding class must be lossless)
- A priority rewrite value that remaps the IEEE 802.1p code point on the FCoE-FC gateway FC interface to the priority used for FCoE traffic on the FCoE network
- An input congestion notification profile (CNP) to enable priority-based flow control (PFC) on the FCoE code point (the code point used as the rewrite value) at the Ethernet interface ingress and an output CNP to configure flow control to pause the correct output queue at the Ethernet interface egress
- A DCBX application and application map on the Ethernet interface to support DCBX application TLV exchange for the lossless FCoE traffic on the FCoE priority

The priority specified in the BA classifier, CNP, and DCBX application map on the Ethernet ingress interfaces must match the priority specified in the fixed classifier and rewrite value configurations on the FC interfaces. You must specify the same lossless FCoE forwarding class in each configuration and use the same IEEE 802.1p code point (priority) so that the FCoE traffic is properly classified into flows and so that those flows receive lossless treatment.

## Topology

This example shows how to configure priority remapping of FCoE traffic on one native FC interface (fc-0/0/2) connected to the FC SAN and on one Ethernet interface (xe-0/0/27) connected to the converged Ethernet (FCoE) network. Both the native FC interface and the Ethernet interface belong to the same local FC fabric on the FCoE-FC gateway.

The converged Ethernet network uses priority 5 (IEEE 802.1p code point 101) for FCoE traffic. The native FC interface on the FCoE-FC gateway receives FC traffic from the FC SAN. The native FC interface encapsulates the FC traffic in Ethernet to create FCoE frames, tags the frames with the IEEE 802.1p priority value 101, and then forwards the FCoE frames to the FCoE-FC gateway Ethernet interface. Because traffic marked with




IEEE 802.1p priority 5 is mapped to a lossless FCoE forwarding class, the traffic receives lossless treatment. The Ethernet interface forwards the FCoE traffic on to the Ethernet network.

FCoE traffic (tagged with priority 5) arriving at the FCoE-FC gateway from the Ethernet network receives lossless treatment and is forwarded to the native FC interface. The native FC interface removes the Ethernet encapsulation from the FCoE frames and forwards the resulting native FC traffic to the FC SAN.

Figure 192 on page 5096 shows the topology for this example, and Table 431 on page 5096 shows the configuration components for this example.

**Figure 192: Topology of the IEEE 802.1p Priority Remapping Example**

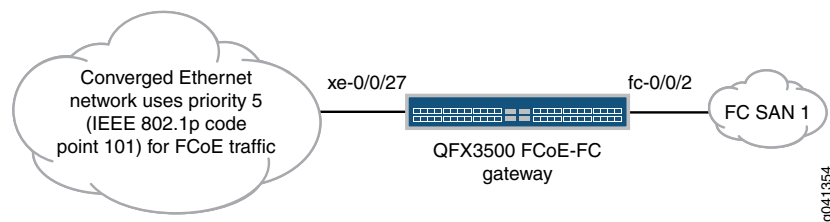

**Table 431: Components of the IEEE 802.1p Priority Remapping Configuration Topology**

| Component                              | Settings                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hardware                               | QFX3500 switch                                                                                                                                                                                                                                                                                                                                                                                                               |
| Forwarding class configuration         | Name— <b>fcoe1</b><br>Queue mapping—queue 5<br>Packet drop attribute— <b>no-loss</b><br><br><b>NOTE:</b> The lossless forwarding class can be mapped to any output queue. However, because FCoE uses priority 5 in this example, matching that traffic to a forwarding class that uses queue 5 creates a configuration that is logical and easy to map because the priority and the queue are identified by the same number. |
| BA classifier (Ethernet interface)     | Name— <b>fcoe_gw_classifier</b><br><br>Maps code point <b>101</b> (IEEE 802.1p priority 5) to the <b>fcoe1</b> forwarding class and assigns traffic a packet loss priority of <b>low</b> .<br><br>The classifier is applied to Ethernet interface <b>xe-0/0/27</b> .                                                                                                                                                         |
| Fixed classifier (native FC interface) | Forwarding class— <b>fcoe1</b><br><br>The classifier is applied to native FC interface <b>fc-0/0/2</b>                                                                                                                                                                                                                                                                                                                       |
| Rewrite value                          | IEEE 802.1p code point— <b>101</b><br><br>The rewrite value is applied to native FC interface <b>fc-0/0/2</b>                                                                                                                                                                                                                                                                                                                |



**Table 431: Components of the IEEE 802.1p Priority Remapping Configuration Topology (*continued*)**

| Component                                     | Settings                                                                                                                                                                                                                                                                                                                              |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PFC configuration (CNP on Ethernet interface) | Name— <b>fcoe1_p5_rewrite_cnp</b><br>Input CNP code point— <b>101</b><br>Output CNP code point— <b>101</b><br>Output CNP flow control queue— <b>5</b><br>Interface— <b>xe-0/0/27</b>                                                                                                                                                  |
| DCBX application mapping                      | Application name— <b>myfcoe5</b><br>Application ether-type— <b>0x8906</b><br>Application map name— <b>myfcoe5_map</b><br>Application map code points— <b>101</b><br>Interface— <b>xe-0/0/27</b><br><br><b>NOTE:</b> LLDP and DCBX must be enabled on the interface. By default, LLDP and DCBX are enabled on all Ethernet interfaces. |

The priority used to identify FCoE traffic (5, IEEE 802.1p code point 101) is configured for lossless transport across the QFX device on interfaces xe-0/0/27 and fc-0/0/2, which belong to the same local FC fabric on the FCoE-FC gateway.

On the Ethernet interface, the classifier maps priority 5 to a lossless forwarding class (fcoe1), the input CNP enables PFC on incoming priority 5 traffic, and the output CNP enables output queue 5 to respond to pause messages received from the peer on traffic tagged with priority 5. On the native FC interface, FC traffic is remapped from priority 3 (the default mapping) to priority 5 and assigned to the same lossless forwarding class, fcoe1, because of the fixed classifier configuration. In this way, traffic tagged with priority 5 on interfaces xe-0/0/27 and fc-0/0/2 receives lossless treatment.



**NOTE:** To avoid fate sharing, ensure that the remapped priority is classified only to the forwarding class used in the fixed classifier on all other interfaces. For example, if you configure a fixed classifier on an FC interface that classifies all of the traffic into lossless forwarding class fcoe1 and remaps the priority to priority 5 (IEEE 802.1p code point 101), then in all other classifier configurations on all other interfaces, priority 5 should always be classified to forwarding class fcoe1. If you classify priority 6 on another interface to forwarding class fcoe1, then congestion on priority 6 traffic affects priority 5 traffic unfairly.





**NOTE:** This example does not include scheduling (bandwidth allocation) configuration or the local FC fabric configuration. This examples focuses only on priority remapping.

## Configuration

### CLI Quick Configuration

To quickly configure IEEE 802.1p priority remapping on an FCoE-FC gateway, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set class-of-service forwarding-classes class fcoe1 queue-num 5 no-loss
set class-of-service classifiers ieee-802.1 fcoe_gw_classifier forwarding-class fcoe1 loss-priority
low code-points 101
set class-of-service interfaces xe-0/0/27 unit 0 classifiers ieee-802.1 fcoe_gw_classifier
set class-of-service interfaces fc-0/0/2 forwarding-class fcoe1
set class-of-service interfaces fc-0/0/2 rewrite-value input ieee-802.1p code-point 101
set class-of-service congestion-notification-profile fcoe1_p5_rewrite_cnp input ieee-802.1
code-point 101 pfc
set class-of-service congestion-notification-profile fcoe1_p5_rewrite_cnp output ieee-802.1
code-point 101 flow-control-queue 5
set class-of-service interfaces xe-0/0/27 congestion-notification-profile fcoe1_p5_rewrite_cnp
set applications application myfcoe5 ether-type 0x8906
set policy-options application-maps myfcoe5_app_map application myfcoe5 code-points 101
set protocols dcbx interface xe-0/0/27 application-map myfcoe5_app_map
```

### Step-by-Step Procedure

To configure a lossless forwarding class for FCoE traffic, classify FCoE traffic into that forwarding class, configure a rewrite value on the native FC interface for the FCoE traffic, and enable PFC on the Ethernet interface, and configure DCBX application protocol TLV exchange for FCoE traffic:

1. Configure the lossless forwarding class (named **fcoe1** and mapped to output queue **5**) for FCoE traffic that uses IEEE 802.1p priority **5**:  

```
[edit class-of-service]
user@switch# set forwarding-classes class fcoe1 queue-num 5 no-loss
```
2. Configure an ingress classifier named **fcoe\_gw\_classifier** to map the FCoE priority (IEEE 802.1p code point **101**) to the lossless FCoE forwarding class (**fcoe1**):  

```
[edit class-of-service classifiers]
user@switch# set ieee-802.1 fcoe_gw_classifier forwarding-class fcoe1 loss-priority low
code-points 101
```
3. Apply the classifier named **fcoe\_gw\_classifier** to Ethernet interface **xe-0/0/27**:  

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/27 unit 0 classifiers ieee-802.1 fcoe_gw_classifier
```
4. Configure the fixed classifier on the native FC interface, using the lossless FCoE forwarding class **fcoe1** (all traffic from the FC SAN is classified into the specified forwarding class). The traffic classified into this forwarding class is tagged with the priority value configured in the next step.  

```
[edit class-of-service]
user@switch# set interfaces fc-0/0/2 forwarding-class fcoe1
```



5. Configure the rewrite value (IEEE 802.1p code point 101) applied to all incoming traffic from the FC SAN on the native FC interface. The rewrite value is the IEEE 802.1p priority that the encapsulated FCoE traffic classified into the **fcoe1** forwarding class uses on the converged Ethernet network.

```
[edit class-of-service]
user@switch# set interfaces fc-0/0/2 rewrite-value input ieee-802.1p code-point 101
```

6. Configure the input stanza of the CNP (named **fcoe1\_p5\_rewrite\_cnp**) to enable PFC on the FCoE priority on the Ethernet interface:

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe1_p5_rewrite_cnp input ieee-802.1p code-point 101 pfc
```

7. Configure the output stanza of the CNP to enable output queue 5 to respond to pause messages received from the peer on traffic tagged with priority 5:

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe1_p5_rewrite_cnp output ieee-802.1p code-point 101 flow-control-queue 5
```

8. Apply the CNP named **fcoe1\_p5\_rewrite\_cnp** to Ethernet interface **xe-0/0/27**:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/27 congestion-notification-profile fcoe1_p5_rewrite_cnp
```

9. Configure a DCBX application for FCoE to map to the Ethernet interface, so that DCBX can exchange application protocol TLVs on the correct (remapped) IEEE 802.1p FCoE priority:

```
[edit]
user@switch# set applications application myfcoe5 ether-type 0x8906
```

10. Configure a DCBX application map to map the FCoE application to the correct (remapped) IEEE 802.1p FCoE priority:

```
[edit]
user@switch# set policy-options application-maps myfcoe5_app_map application myfcoe5 code-points 101
```

11. Apply the application map to the Ethernet interface so that DCBX exchanges FCoE application TLVs on the correct code point:

```
[edit]
user@switch# set protocols dcbx interface xe-0/0/27 application-map myfcoe5_app_map
```

## Verification

To verify the configuration and proper operation of IEEE 802.1p priority remapping on an FCoE-FC gateway, perform these tasks:

- [Verifying the Forwarding Class Configuration on page 5100](#)
- [Verifying the Behavior Aggregate Classifier Configuration on page 5100](#)
- [Verifying the FC Interface Configuration \(Fixed Classifier, Rewrite Value\) on page 5101](#)
- [Verifying the Ethernet Interface PFC Configuration \(CNP\) on page 5101](#)
- [Verifying the Ethernet Interface Configuration on page 5102](#)



- [Verifying the DCBX Application Configuration on page 5102](#)
- [Verifying the DCBX Application Map Configuration on page 5102](#)
- [Verifying the DCBX Application Protocol Exchange Interface Configuration on page 5103](#)

### ***Verifying the Forwarding Class Configuration***

**Purpose** Verify that the lossless forwarding class **fcoe1** has been created.

**Action** Show the forwarding class configuration by using the operational command **show class-of-service forwarding class**:

```
user@switch# show class-of-service forwarding-class
```

| Forwarding class | ID | Queue | Policing priority | No-Loss  |
|------------------|----|-------|-------------------|----------|
| best-effort      | 0  | 0     | normal            | Disabled |
| fcoe             | 1  | 3     | normal            | Enabled  |
| no-loss          | 2  | 4     | normal            | Enabled  |
| network-control  | 3  | 7     | normal            | Disabled |
| fcoe1            | 4  | 5     | normal            | Enabled  |
| mcast            | 8  | 8     | normal            | Disabled |

**Meaning** The **show class-of-service forwarding-class** command shows all of the forwarding classes. The command output shows that the **fcoe1** forwarding class is configured on output queue 5 with the no-loss packet drop attribute enabled.

Because we did not explicitly configure the default forwarding classes, they remain in their default state, including the lossless configuration of the **fcoe** and **no-loss** default forwarding classes.

### ***Verifying the Behavior Aggregate Classifier Configuration***

**Purpose** Verify that the classifier maps the forwarding classes to the correct IEEE 802.1p code points (priorities) and packet loss priorities.

**Action** List the classifier configured for priority remapping using the operational mode command **show class-of-service classifier name fcoe\_gw\_classifier**:

```
user@switch> show class-of-service classifier name fcoe_gw_classifier
```

| Classifier: fcoe_gw_classifier, Code point type: ieee-802.1, Index: 13100 | Code point | Forwarding class | Loss priority |
|---------------------------------------------------------------------------|------------|------------------|---------------|
|                                                                           | 101        | fcoe1            | low           |

**Meaning** The **show class-of-service classifier name fcoe\_gw\_classifier** command shows the IEEE 802.1p code points and the loss priorities that are mapped to the forwarding classes in the classifier. The command output shows that the classifier maps forwarding class **fcoe1** to IEEE 802.1p code point 101 (priority 5) with a packet loss priority of **low**.



**Verifying the FC Interface Configuration (Fixed Classifier, Rewrite Value)**

**Purpose** Verify that the native FC interface (NP\_Port) classifies incoming traffic into forwarding class **fcoe1** and that the interface rewrite value is priority 5 (IEEE code point 101).

**Action** Display the FC interface configuration using the operational mode command **show configuration class-of-service interfaces fc-0/0/2**:

```
user@switch> show configuration class-of-service interfaces fc-0/0/2
rewrite-value {
    input {
        ieee-802.1 {
            code-point {
                101;
            }
        }
    }
}
forwarding-class fcoe1;
```

**Meaning** The **show configuration class-of-service interfaces fc-0/0/2** command shows that the rewrite value for incoming (input) traffic is IEEE 802.1p code point **101** (priority 5), and that the interface uses forwarding class **fcoe1** as the fixed classifier for all incoming traffic.

**Verifying the Ethernet Interface PFC Configuration (CNP)**

**Purpose** Verify that PFC is enabled on the correct priority (IEEE 802.1p code point **101**) for lossless transport and that flow control is enabled on the correct output queue (queue **5**) on the Ethernet interface.

**Action** List the congestion notification profile using the operational mode command **show class-of-service congestion-notification fcoe1\_p5\_rewrite\_cnp**:

```
user@switch> show class-of-service congestion-notification fcoe1_p5_rewrite_cnp
Name: fcoe1_p5_rewrite_cnp, Index: 7061
Type: Input
Cable Length: 100 m
  Priority  PFC          MRU
  000      Disabled
  001      Disabled
  010      Disabled
  011      Disabled
  100      Disabled
  101      Enabled    2500
  110      Disabled
  111      Disabled
Type: Output
  Priority  Flow-Control-Queues
  101
      5
```

**Meaning** The **show class-of-service congestion-notification fcoe1\_p5\_rewrite\_cnp** command shows the input and output stanzas of the CNP. The input stanza shows that PFC is enabled on IEEE 802.1p code point 101 (priority 5). The input stanza also shows that the CNP uses



the default values of 100 meters for the cable length value and 2500 bytes for the maximum receive unit (MRU) value.

The output stanza shows that flow control is enabled on output queue 5 for IEEE 802.1p priority code point 101 (priority 5).

#### *Verifying the Ethernet Interface Configuration*

**Purpose** Verify that the classifier **fcoe\_gw\_classifier** and the congestion notification profile **fcoe1\_p5\_rewrite\_cnp** are configured on Ethernet interface **xe-0/0/27**.

**Action** List the ingress interfaces using the operational mode command **show configuration class-of-service interfaces xe-0/0/27**:

```
user@switch> show configuration class-of-service interfaces xe-0/0/27
congestion-notification-profile fcoe1_p5_rewrite_cnp;
unit 0 {
    classifiers {
        ieee-802.1 fcoe_gw_classifier;
    }
}
```

**Meaning** The **show configuration class-of-service interfaces xe-0/0/27** command shows that the congestion notification profile **fcoe1\_p5\_rewrite\_cnp** is configured on the interface, and that the IEEE 802.1p classifier associated with the interface is **fcoe\_gw\_classifier**.

#### *Verifying the DCBX Application Configuration*

**Purpose** Verify that the DCBX application named **myfcoe5** for FCoE is configured.

**Action** List the DCBX applications by using the configuration mode command **show applications**:

```
user@switch# show applications
application myfcoe5 {
    ether-type 0x8906;
```

**Meaning** The **show applications** configuration mode command shows all of the configured applications. The output shows that the application **myfcoe5** is configured with an EtherType of **0x8906** (the correct EtherType for FCoE traffic).

#### *Verifying the DCBX Application Map Configuration*

**Purpose** Verify that the application map **myfcoe5\_app\_map** is configured.

**Action** List the application map by using the configuration mode command **show policy-options application-maps**:

```
user@switch# show policy-options application-maps
myfcoe5_app_map {
    application myfcoe5 code-points 101;
}
```

**Meaning** The **show policy-options application-maps** configuration mode command lists all of the configured application maps and the applications that belong to each application map.



The output shows that there is one application map, **myfcoe5\_app\_map**, which consists of the application named **myfcoe5** mapped to IEEE 802.1p code point **101** (priority 5).

### *Verifying the DCBX Application Protocol Exchange Interface Configuration*

**Purpose** Verify that the application map is applied to the correct interface (xe-0/0/27).

**Action** List the application maps using the configuration mode command **show protocols dcbx**:

```
user@switch# show protocols dcbx
interface xe-0/0/27.0 {
    application-map myfcoe5_app_map;
}
```

**Meaning** The **show protocols dcbx** configuration mode command lists the application map association with interfaces. The output shows that interface **xe-0/0/27** uses application map **myfcoe5\_app\_map**.

- Related Documentation**
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)
  - [Example: Configuring Unicast Classifiers on page 5014](#)
  - [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
  - [Configuring CoS Fixed Classifier Rewrite Values for Native FC Interfaces \(NP\\_Ports\) on page 5151](#)
  - [Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 4911](#)

## **Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Best-Effort Unicast Traffic**

Although the switch reserves some buffer space to ensure a minimum memory allocation for ports and queues, you can configure how the system uses the rest of the buffer space to optimize the buffer allocation for your particular mix of network traffic.

This example shows you the recommended configuration of the global shared buffer pool to support a network that carries mostly best-effort (lossy) unicast traffic. The global shared buffer pool is memory space that all of the ports on the switch share dynamically as they need buffers. You can allocate global shared memory space to different types of buffers to better support different mixes of network traffic.



**CAUTION:** Changing the buffer configuration is a disruptive event. Traffic stops on *all* ports until buffer reprogramming is complete.

Use the default shared buffer settings (for a network with a balanced mix of lossless, best effort, and multicast traffic) or one of the recommended shared buffer configurations for your mix of network traffic (mostly best-effort unicast traffic, mostly multicast traffic, or mostly lossless traffic). Either the default configuration or one of the recommended configurations provides a buffer allocation that satisfies the needs of most networks.



After starting from the recommended configuration, you can fine-tune the shared buffer settings, but do so with caution to prevent traffic loss due to buffer misconfiguration.

- [Requirements on page 5104](#)
- [Overview on page 5104](#)
- [Configuration on page 5105](#)
- [Verification on page 5107](#)

## Requirements

---

This example uses the following hardware and software components:

- Juniper Networks QFX3500 Switch
- Junos OS Release 12.3 or later for the QFX Series

## Overview

---

You can configure the percentage of available (user-configurable) buffer space allocated to the global shared buffers. Any space that you do not allocate to the global shared buffer pool is added to the dedicated buffer pool. The default configuration allocates 100 percent of the available buffer space to the global shared buffers.

You can partition the ingress and egress shared buffer pools to allocate more buffers to the types of traffic your network predominantly carries, and fewer buffers to other traffic. From the buffer space allocated to the ingress shared buffer pool, you can allocate space to:

- Lossless buffers—Percentage of shared buffer pool for all lossless ingress traffic. The minimum value for the lossless buffers is 5 percent.
- Lossless headroom buffers—Percentage of shared buffer pool for packets received while a pause is asserted. If Ethernet PAUSE is configured on a port or if priority-based flow control (PFC) is configured on priorities on a port, when the port sends a pause message to the connected peer, the port uses the headroom buffers to store the packets that arrive between the time the port sends the pause message and the time the last packet arrives after the peer pauses traffic. The minimum value for the lossless headroom buffers is 0 (zero) percent. (Lossless headroom buffers are the only buffers that can have a minimum value of less than 5 percent.)
- Lossy buffers—Percentage of shared buffer pool for all best-effort ingress traffic (best-effort unicast, multidestination, and strict-high priority traffic). The minimum value for the lossy buffers is 5 percent.

The combined percentage values of the ingress lossless, lossless headroom, and lossy buffer partitions must total exactly 100 percent. If the buffer percentages total more than 100 percent or less than 100 percent, the switch returns a commit error. All ingress buffer partitions must be explicitly configured, even when the lossless headroom buffer partition has a value of 0 (zero) percent.

From the buffer space allocated to the egress shared buffer pool, you can allocate space to:



- Lossless buffers—Percentage of shared buffer pool for all lossless egress queues. The minimum value for the lossless buffers is 5 percent.
- Lossy buffers—Percentage of shared buffer pool for all best-effort egress queues (best-effort unicast, and strict-high priority queues). The minimum value for the lossy buffers is 5 percent.
- Multicast buffers—Percentage of shared buffer pool for all multidestination (multicast, broadcast, and destination lookup fail) egress queues. The minimum value for the multicast buffers is 5 percent.

The combined percentage values of the egress lossless, lossy, and multicast buffer partitions must total exactly 100 percent. If the buffer percentages total more than 100 percent or less than 100 percent, the switch returns a commit error. All egress buffer partitions must be explicitly configured and must have a value of at least 5 percent.

To configure the shared buffers to support a network that carries mostly best-effort unicast traffic, more buffer space needs to be allocated to lossy buffers, and less buffer space should be allocated to lossless buffers. This example shows you how to configure the global shared buffer pool allocation that we recommend to support a network that carries mostly unicast traffic.

### Topology

[Table 432 on page 5105](#) shows the configuration components for this example.

**Table 432: Components of the Recommended Shared Buffer Configuration for Best-Effort Unicast Network Topologies**

| Component             | Settings                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hardware              | QFX3500 switch                                                                                                                                                                                                                                                                                                                                                                                                           |
| Ingress shared buffer | Percentage of available ingress buffer space allocated to the ingress shared buffer: 100%<br>Percentage of ingress buffer space allocated to lossless traffic (lossless buffer partition): 5%<br>Percentage of ingress buffer space allocated to lossless headroom traffic (lossless-headroom buffer partition): 0%<br>Percentage of ingress buffer space allocated to best-effort traffic (lossy buffer partition): 95% |
| Egress shared buffer  | Percentage of available egress buffer space allocated to the egress shared buffer: 100%<br>Percentage of egress buffer space allocated to lossless queues (lossless buffer partition): 5%<br>Percentage of egress buffer space allocated to best-effort queues (lossy buffer partition): 75%<br>Percentage of egress buffer space allocated to multicast traffic (multicast buffer partition): 20%                       |

### Configuration

**CLI Quick Configuration** To quickly configure the recommended shared buffer settings for networks that carry mostly best-effort unicast traffic, copy the following commands, paste them in a text



file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level:

```
[edit class-of-service shared-buffer]
set ingress percent 100
set ingress buffer-partition lossless percent 5
set ingress buffer-partition lossless-headroom percent 0
set ingress buffer-partition lossy percent 95
set egress percent 100
set egress buffer-partition lossless percent 5
set egress buffer-partition lossy percent 75
set egress buffer-partition multicast percent 20
```

### *Configuring the Global Shared Buffer Pool for Networks with Mostly Best-Effort Unicast Traffic*

**Step-by-Step Procedure** To configure the global ingress and egress shared buffer allocations and partitions for a network that carries mostly best-effort unicast traffic:

1. Configure the percentage of available (nonreserved) buffers used for the ingress global shared buffer pool:  

```
[edit class-of-service shared-buffer]
user@switch# set ingress percent 100
```
2. Configure the global ingress buffer partitions for lossless, lossless-headroom, and lossy traffic:  

```
[edit class-of-service shared-buffer]
user@switch# set ingress buffer-partition lossless percent 5
user@switch# set ingress buffer-partition lossless-headroom percent 0
user@switch# set ingress buffer-partition lossy percent 95
```
3. Configure the percentage of available (nonreserved) buffers used for the egress global shared buffer pool:  

```
[edit class-of-service shared-buffer]
user@switch# set egress percent 100
```
4. Configure the global egress buffer partitions for lossless, lossy, and multicast queues:  

```
[edit class-of-service shared-buffer]
user@switch# set egress buffer-partition lossless percent 5
user@switch# set egress buffer-partition lossy percent 75
user@switch# set egress buffer-partition multicast percent 20
```

### **Results**

Display the results of the configuration:

```
root@dcbg-tp-pa-02> show configuration class-of-service shared-buffer
ingress {
    percent 100;
    buffer-partition lossless {
        percent 5;
    }
    buffer-partition lossy {
        percent 95;
    }
    buffer-partition lossless-headroom {
        percent 0;
    }
}
```



```

}
egress {
    percent 100;
    buffer-partition lossless {
        percent 5;
    }
    buffer-partition lossy {
        percent 75;
    }
    buffer-partition multicast {
        percent 20;
    }
}

```

### Verification

Verify that the shared buffer configuration has been created properly.

#### Verifying the Shared Buffer Configuration

**Purpose** Verify that the ingress and egress global shared buffer pools are correctly configured and partitioned among the shared buffer types.

**Action** List the global shared buffer configuration using the operational mode command **show class-of-service shared-buffer**:

```

user@switch> show class-of-service shared-buffer
root@dcbg-tp-pa-02> show class-of-service shared-buffer
Ingress:
  Total Buffer      : 9360.00 KB
  Dedicated Buffer   : 2158.00 KB
  Shared Buffer      : 7202.00 KB
    Lossless        : 360.10 KB
    Lossless Headroom : 0.00 KB
    Lossy           : 6841.90 KB

  Lossless Headroom Utilization:
  Node Device      Total      Used      Free
  0                0.00 KB    0.00 KB    0.00 KB

Egress:
  Total Buffer      : 9360.00 KB
  Dedicated Buffer   : 2704.00 KB
  Shared Buffer      : 6656.00 KB
    Lossless        : 332.80 KB
    Multicast        : 1331.20 KB
    Lossy           : 4992.00 KB

```

**Meaning** The **show class-of-service shared-buffer** operational command shows all of the ingress and egress global shared buffer settings, including the buffer partitioning.

For the ingress shared buffers, the command output shows:

- The total switch buffer pool is 9360 KB (9 MB).
- The dedicated buffer pool is 2158 KB. This is the size of the global ingress dedicated buffer pool when you configure the ingress shared buffer pool as 100 percent of the available (user-configurable) buffer space. This is the minimum size of the reserved,



ingress dedicated ingress buffer pool (not user-configurable). If you configure the shared buffer as less than 100 percent of the available buffer pool, the remaining buffer space is added to the dedicated buffer pool.

- With the ingress shared buffer pool configured as 100 percent of the available buffers, the total size of the ingress shared buffer pool is 7202 KB.
- The ingress shared buffer pool is partitioned to allocate:
  - 360.10 KB to lossless traffic
  - No space to lossless headroom traffic
  - 6841.90 KB to lossy unicast traffic
- The Lossless Headroom Utilization field shows how much of the buffer space reserved for paused traffic is used. Because the lossless headroom buffer partition is set to 0 (zero) percent, the total amount of lossless headroom buffer space is 0 KB; therefore the amount of used and free lossless headroom buffer space is also 0 KB.

For the egress shared buffers, the command output shows:

- The total switch buffer pool is 9360 KB (9 MB).
- The dedicated buffer pool is 2704 KB. This is the size of the global egress dedicated buffer pool when you configure the egress shared buffer pool as 100 percent of the available (user-configurable) buffer space. This is the minimum size of the reserved, egress dedicated buffer pool (not user-configurable). If you configure the shared buffer as less than 100 percent of the available buffer pool, the remaining buffer space is added to the dedicated buffer pool.
- With the egress shared buffer pool configured as 100 percent of the available buffers, the total size of the egress shared buffer pool is 6656 KB. This is less than the ingress shared buffer pool because the switch reserves more egress dedicated buffer space than ingress dedicated buffer space. (More dedicated buffer space means less shared buffer space, and more shared buffer space means less dedicated buffer space.)
- The egress shared buffer pool is partitioned to allocate:
  - 332.80 KB to lossless traffic
  - 1331.20 KB to multicast traffic
  - 4992 KB to lossy unicast traffic

**Related  
Documentation**

- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Multicast Traffic on page 5109](#)
- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Lossless Traffic on page 5114](#)
- [Configuring Global Ingress and Egress Shared Buffers on page 5153](#)
- [Understanding CoS Buffer Configuration on page 4914](#)



## Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Multicast Traffic

Although the switch reserves some buffer space to ensure a minimum memory allocation for ports and queues, you can configure how the system uses the rest of the buffer space to optimize the buffer allocation for your particular mix of network traffic.

This example shows you the recommended configuration of the global shared buffer pool to support a network that carries mostly multicast traffic. The global shared buffer pool is memory space that all of the ports on the switch share dynamically as they need buffers. You can allocate global shared memory space to different types of buffers to better support different mixes of network traffic.



**CAUTION:** Changing the buffer configuration is a disruptive event. Traffic stops on *all* ports until buffer reprogramming is complete.

Use the default shared buffer settings (for a network with a balanced mix of lossless, best effort, and multicast traffic) or one of the recommended shared buffer configurations for your mix of network traffic (mostly best-effort unicast traffic, mostly multicast traffic, or mostly lossless traffic). Either the default configuration or one of the recommended configurations provides a buffer allocation that satisfies the needs of most networks.

After starting from the recommended configuration, you can fine-tune the shared buffer settings, but do so with caution to prevent traffic loss due to buffer misconfiguration.

- [Requirements on page 5109](#)
- [Overview on page 5109](#)
- [Configuration on page 5111](#)
- [Verification on page 5112](#)

### Requirements

This example uses the following hardware and software components:

- Juniper Networks QFX3500 Switch
- Junos OS Release 12.3 or later for the QFX Series

### Overview

You can configure the percentage of available (user-configurable) buffer space allocated to the global shared buffers. Any space that you do not allocate to the global shared buffer pool is added to the dedicated buffer pool. The default configuration allocates 100 percent of the available buffer space to the global shared buffers.

You can partition the ingress and egress shared buffer pools to allocate more buffers to the types of traffic your network predominantly carries, and fewer buffers to other traffic. From the buffer space allocated to the ingress shared buffer pool, you can allocate space to:



- Lossless buffers—Percentage of shared buffer pool for all lossless ingress traffic. The minimum value for the lossless buffers is 5 percent.
- Lossless headroom buffers—Percentage of shared buffer pool for packets received while a pause is asserted. If Ethernet PAUSE is configured on a port or if priority-based flow control (PFC) is configured on priorities on a port, when the port sends a pause message to the connected peer, the port uses the headroom buffers to store the packets that arrive between the time the port sends the pause message and the time the last packet arrives after the peer pauses traffic. The minimum value for the lossless headroom buffers is 0 (zero) percent. (Lossless headroom buffers are the only buffers that can have a minimum value of less than 5 percent.)
- Lossy buffers—Percentage of shared buffer pool for all best-effort ingress traffic (best-effort unicast, multidestination, and strict-high priority traffic). The minimum value for the lossy buffers is 5 percent.

The combined percentage values of the ingress lossless, lossless headroom, and lossy buffer partitions must total exactly 100 percent. If the buffer percentages total more than 100 percent or less than 100 percent, the switch returns a commit error. All ingress buffer partitions must be explicitly configured, even when the lossless headroom buffer partition has a value of 0 (zero) percent.

From the buffer space allocated to the egress shared buffer pool, you can allocate space to:

- Lossless buffers—Percentage of shared buffer pool for all lossless egress queues. The minimum value for the lossless buffers is 5 percent.
- Lossy buffers—Percentage of shared buffer pool for all best-effort egress queues (best-effort unicast, and strict-high priority queues). The minimum value for the lossy buffers is 5 percent.
- Multicast buffers—Percentage of shared buffer pool for all multidestination (multicast, broadcast, and destination lookup fail) egress queues. The minimum value for the multicast buffers is 5 percent.

The combined percentage values of the egress lossless, lossy, and multicast buffer partitions must total exactly 100 percent. If the buffer percentages total more than 100 percent or less than 100 percent, the switch returns a commit error. All egress buffer partitions must be explicitly configured and must have a value of at least 5 percent.

To configure the shared buffers to support a network that carries mostly multicast traffic, more buffer space needs to be allocated to lossy buffers, less buffer space should be allocated to lossless buffers, and more space needs to be allocated to egress multicast buffers. This example shows you how to configure the global shared buffer pool allocation that we recommend to support a network that carries mostly multicast traffic.

### ***Topology***

[Table 433 on page 5111](#) shows the configuration components for this example.



Table 433: Components of the Recommended Shared Buffer Configuration for Multicast Network Topologies

| Component             | Settings                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hardware              | QFX3500 switch                                                                                                                                                                                                                                                                                                                                                                                                           |
| Ingress shared buffer | Percentage of available ingress buffer space allocated to the ingress shared buffer: 100%<br>Percentage of ingress buffer space allocated to lossless traffic (lossless buffer partition): 5%<br>Percentage of ingress buffer space allocated to lossless headroom traffic (lossless-headroom buffer partition): 0%<br>Percentage of ingress buffer space allocated to best-effort traffic (lossy buffer partition): 95% |
| Egress shared buffer  | Percentage of available egress buffer space allocated to the egress shared buffer: 100%<br>Percentage of egress buffer space allocated to lossless queues (lossless buffer partition): 5%<br>Percentage of egress buffer space allocated to best-effort queues (lossy buffer partition): 20%<br>Percentage of egress buffer space allocated to multicast traffic (multicast buffer partition): 75%                       |

### Configuration

#### CLI Quick Configuration

To quickly configure the recommended shared buffer settings for networks that carry mostly multicast traffic, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level:

```
[edit class-of-service shared-buffer]
set ingress percent 100
set ingress buffer-partition lossless percent 5
set ingress buffer-partition lossless-headroom percent 0
set ingress buffer-partition lossy percent 95
set egress percent 100
set egress buffer-partition lossless percent 5
set egress buffer-partition lossy percent 20
set egress buffer-partition multicast percent 75
```

#### *Configuring the Global Shared Buffer Pool for Networks with Mostly Multicast Traffic*

#### Step-by-Step Procedure

To configure the global ingress and egress shared buffer allocations and partitions for a network that carries mostly multicast traffic:

1. Configure the percentage of available (nonreserved) buffers used for the ingress global shared buffer pool:

```
[edit class-of-service shared-buffer]
user@switch# set ingress percent 100
```

2. Configure the global ingress buffer partitions for lossless, lossless-headroom, and lossy traffic:

```
[edit class-of-service shared-buffer]
user@switch# set ingress buffer-partition lossless percent 5
user@switch# set ingress buffer-partition lossless-headroom percent 0
user@switch# set ingress buffer-partition lossy percent 95
```



3. Configure the percentage of available (nonreserved) buffers used for the egress global shared buffer pool:  

```
[edit class-of-service shared-buffer]
user@switch# set egress percent 100
```
4. Configure the global egress buffer partitions for lossless, lossy, and multicast queues:  

```
[edit class-of-service shared-buffer]
user@switch# set egress buffer-partition lossless percent 5
user@switch# set egress buffer-partition lossy percent 20
user@switch# set egress buffer-partition multicast percent 75
```

### Results

Display the results of the configuration:

```
root@dcbg-tp-pa-02> show configuration class-of-service shared-buffer
ingress {
    percent 100;
    buffer-partition lossless {
        percent 5;
    }
    buffer-partition lossy {
        percent 95;
    }
    buffer-partition lossless-headroom {
        percent 0;
    }
}
egress {
    percent 100;
    buffer-partition lossless {
        percent 5;
    }
    buffer-partition lossy {
        percent 20;
    }
    buffer-partition multicast {
        percent 75;
    }
}
```

---

### Verification

Verify that the shared buffer configuration has been created properly.

#### *Verifying the Shared Buffer Configuration*

**Purpose** Verify that the ingress and egress global shared buffer pools are correctly configured and partitioned among the shared buffer types.

**Action** List the global shared buffer configuration using the operational mode command **show class-of-service shared-buffer**:

```
user@switch> show class-of-service shared-buffer
root@dcbg-tp-pa-02> show class-of-service shared-buffer
Ingress:
  Total Buffer      : 9360.00 KB
  Dedicated Buffer  : 2158.00 KB
```



```

Shared Buffer      : 7202.00 KB
Lossless          : 360.10 KB
Lossless Headroom : 0.00 KB
Lossy             : 6841.90 KB

```

Lossless Headroom Utilization:

| Node Device | Total   | Used    | Free    |
|-------------|---------|---------|---------|
| 0           | 0.00 KB | 0.00 KB | 0.00 KB |

Egress:

```

Total Buffer      : 9360.00 KB
Dedicated Buffer  : 2704.00 KB
Shared Buffer     : 6656.00 KB
Lossless         : 332.80 KB
Multicast        : 4992.00 KB
Lossy            : 1331.20 KB

```

**Meaning** The **show class-of-service shared-buffer** operational command shows all of the ingress and egress global shared buffer settings, including the buffer partitioning.

For the ingress shared buffers, the command output shows:

- The total switch buffer pool is 9360 KB (9 MB).
- The dedicated buffer pool is 2158 KB. This is the size of the global ingress dedicated buffer pool when you configure the ingress shared buffer pool as 100 percent of the available (user-configurable) buffer space. This is the minimum size of the reserved, ingress dedicated ingress buffer pool (not user-configurable). If you configure the shared buffer as less than 100 percent of the available buffer pool, the remaining buffer space is added to the dedicated buffer pool.
- With the ingress shared buffer pool configured as 100 percent of the available buffers, the total size of the ingress shared buffer pool is 7202 KB.
- The ingress shared buffer pool is partitioned to allocate:
  - 360.10 KB to lossless traffic
  - No space to lossless headroom traffic
  - 6841.90 KB to lossy unicast traffic
- The Lossless Headroom Utilization field shows how much of the buffer space reserved for paused traffic is used. Because the lossless headroom buffer partition is set to 0 (zero) percent, the total amount of lossless headroom buffer space is 0 KB; therefore the amount of used and free lossless headroom buffer space is also 0 KB.

For the egress shared buffers, the command output shows:

- The total switch buffer pool is 9360 KB (9 MB).
- The dedicated buffer pool is 2704 KB. This is the size of the global egress dedicated buffer pool when you configure the egress shared buffer pool as 100 percent of the available (user-configurable) buffer space. This is the minimum size of the reserved, egress dedicated buffer pool (not user-configurable). If you configure the shared buffer as less than 100 percent of the available buffer pool, the remaining buffer space is added to the dedicated buffer pool.



- With the egress shared buffer pool configured as 100 percent of the available buffers, the total size of the egress shared buffer pool is 6656 KB. This is less than the ingress shared buffer pool because the switch reserves more egress dedicated buffer space than ingress dedicated buffer space. (More dedicated buffer space means less shared buffer space, and more shared buffer space means less dedicated buffer space.)
- The egress shared buffer pool is partitioned to allocate:
  - 332.80 KB to lossless traffic
  - 4992 KB to multicast traffic
  - 1331.20 KB to lossy unicast traffic

**Related Documentation**

- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Best-Effort Unicast Traffic on page 5103](#)
- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Lossless Traffic on page 5114](#)
- [Configuring Global Ingress and Egress Shared Buffers on page 5153](#)
- [Understanding CoS Buffer Configuration on page 4914](#)

### Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Lossless Traffic

Although the switch reserves some buffer space to ensure a minimum memory allocation for ports and queues, you can configure how the system uses the rest of the buffer space to optimize the buffer allocation for your particular mix of network traffic.

This example shows you the recommended configuration of the global shared buffer pool to support a network that carries mostly lossless traffic. The global shared buffer pool is memory space that all of the ports on the switch share dynamically as they need buffers. You can allocate global shared memory space to different types of buffers to better support different mixes of network traffic.



**CAUTION:** Changing the buffer configuration is a disruptive event. Traffic stops on *all* ports until buffer reprogramming is complete.

---

Use the default shared buffer settings (for a network with a balanced mix of lossless, best effort, and multicast traffic) or one of the recommended shared buffer configurations for your mix of network traffic (mostly best-effort unicast traffic, mostly multicast traffic, or mostly lossless traffic). Either the default configuration or one of the recommended configurations provides a buffer allocation that satisfies the needs of most networks.





**NOTE:** When we discuss lossless buffers, we mean buffers that handle traffic on which you enable priority-based flow control (PFC) to ensure lossless transport. The lossless buffers are not used for best-effort traffic on a link on which you enable Ethernet PAUSE (IEEE 802.3x).

After starting from the recommended configuration, you can fine-tune the shared buffer settings, but do so with caution to prevent traffic loss due to buffer misconfiguration.

- [Requirements on page 5115](#)
- [Overview on page 5115](#)
- [Configuration on page 5117](#)
- [Verification on page 5118](#)

### Requirements

This example uses the following hardware and software components:

- Juniper Networks QFX3500 Switch
- Junos OS Release 12.3 or later for the QFX Series

### Overview

You can configure the percentage of available (user-configurable) buffer space allocated to the global shared buffers. Any space that you do not allocate to the global shared buffer pool is added to the dedicated buffer pool. The default configuration allocates 100 percent of the available buffer space to the global shared buffers.

You can partition the ingress and egress shared buffer pools to allocate more buffers to the types of traffic your network predominantly carries, and fewer buffers to other traffic. From the buffer space allocated to the ingress shared buffer pool, you can allocate space to:

- Lossless buffers—Percentage of shared buffer pool for all lossless ingress traffic. The minimum value for the lossless buffers is 5 percent.
- Lossless headroom buffers—Percentage of shared buffer pool for packets received while a pause is asserted. If Ethernet PAUSE is configured on a port or if priority-based flow control (PFC) is configured on priorities on a port, when the port sends a pause message to the connected peer, the port uses the headroom buffers to store the packets that arrive between the time the port sends the pause message and the time the last packet arrives after the peer pauses traffic. The minimum value for the lossless headroom buffers is 0 (zero) percent. (Lossless headroom buffers are the only buffers that can have a minimum value of less than 5 percent.)
- Lossy buffers—Percentage of shared buffer pool for all best-effort ingress traffic (best-effort unicast, multidestination, and strict-high priority traffic). The minimum value for the lossy buffers is 5 percent.



The combined percentage values of the ingress lossless, lossless headroom, and lossy buffer partitions must total exactly 100 percent. If the buffer percentages total more than 100 percent or less than 100 percent, the switch returns a commit error. All ingress buffer partitions must be explicitly configured, even when the lossless headroom buffer partition has a value of 0 (zero) percent.

From the buffer space allocated to the egress shared buffer pool, you can allocate space to:

- Lossless buffers—Percentage of shared buffer pool for all lossless egress queues. The minimum value for the lossless buffers is 5 percent.
- Lossy buffers—Percentage of shared buffer pool for all best-effort egress queues (best-effort unicast, and strict-high priority queues). The minimum value for the lossy buffers is 5 percent.
- Multicast buffers—Percentage of shared buffer pool for all multidestination (multicast, broadcast, and destination lookup fail) egress queues. The minimum value for the multicast buffers is 5 percent.

The combined percentage values of the egress lossless, lossy, and multicast buffer partitions must total exactly 100 percent. If the buffer percentages total more than 100 percent or less than 100 percent, the switch returns a commit error. All egress buffer partitions must be explicitly configured and must have a value of at least 5 percent.

To configure the shared buffers to support a network that carries mostly lossless traffic, more buffer space needs to be allocated to lossless buffers, and less buffer space should be allocated to lossy buffers. This example shows you how to configure the global shared buffer pool allocation that we recommend to support a network that carries mostly lossless traffic.

### Topology

[Table 434 on page 5116](#) shows the configuration components for this example.

**Table 434: Components of the Recommended Shared Buffer Configuration for Lossless Network Topologies**

| Component             | Settings                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hardware              | QFX3500 switch                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Ingress shared buffer | Percentage of available ingress buffer space allocated to the ingress shared buffer: 100%<br><br>Percentage of ingress buffer space allocated to lossless traffic (lossless buffer partition): 15%<br><br>Percentage of ingress buffer space allocated to lossless headroom traffic (lossless headroom buffer partition): 80%<br><br>Percentage of ingress buffer space allocated to best-effort traffic (lossy buffer partition): 5% |



Table 434: Components of the Recommended Shared Buffer Configuration for Lossless Network Topologies (*continued*)

| Component            | Settings                                                                                          |
|----------------------|---------------------------------------------------------------------------------------------------|
| Egress shared buffer | Percentage of available egress buffer space allocated to the egress shared buffer: 100%           |
|                      | Percentage of egress buffer space allocated to lossless queues (lossless buffer partition): 90%   |
|                      | Percentage of egress buffer space allocated to best-effort queues (lossy buffer partition): 5%    |
|                      | Percentage of egress buffer space allocated to multicast traffic (multicast buffer partition): 5% |

### Configuration

**CLI Quick Configuration** To quickly configure the recommended shared buffer settings for networks that carry mostly lossless traffic, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level:

```
[edit class-of-service shared-buffer]
set ingress percent 100
set ingress buffer-partition lossless percent 15
set ingress buffer-partition lossless-headroom percent 80
set ingress buffer-partition lossy percent 5
set egress percent 100
set egress buffer-partition lossless percent 90
set egress buffer-partition lossy percent 5
set egress buffer-partition multicast percent 5
```

### Configuring the Global Shared Buffer Pool for Networks with Mostly Lossless Traffic

**Step-by-Step Procedure** To configure the global ingress and egress shared buffer allocations and partitions for a network that carries mostly lossless traffic:

1. Configure the percentage of available (nonreserved) buffers used for the ingress global shared buffer pool:  

```
[edit class-of-service shared-buffer]
user@switch# set ingress percent 100
```
2. Configure the global ingress buffer partitions for lossless, lossless-headroom, and lossy traffic:  

```
[edit class-of-service shared-buffer]
user@switch# set ingress buffer-partition lossless percent 15
user@switch# set ingress buffer-partition lossless-headroom percent 80
user@switch# set ingress buffer-partition lossy percent 5
```
3. Configure the percentage of available (nonreserved) buffers used for the egress global shared buffer pool:  

```
[edit class-of-service shared-buffer]
user@switch# set egress percent 100
```
4. Configure the global egress buffer partitions for lossless, lossy, and multicast queues:  

```
[edit class-of-service shared-buffer]
user@switch# set egress buffer-partition lossless percent 90
user@switch# set egress buffer-partition lossy percent 5
```



```
user@switch# set egress buffer-partition multicast percent 5
```

### Results

Display the results of the configuration:

```
rrroot@dcbg-tp-pa-02> show configuration class-of-service shared-buffer
ingress {
    percent 100;
    buffer-partition lossless {
        percent 15;
    }
    buffer-partition lossy {
        percent 5;
    }
    buffer-partition lossless-headroom {
        percent 80;
    }
}
egress {
    percent 100;
    buffer-partition lossless {
        percent 90;
    }
    buffer-partition lossy {
        percent 5;
    }
    buffer-partition multicast {
        percent 5;
    }
}
```

---

### Verification

Verify that the shared buffer configuration has been created properly.

#### *Verifying the Shared Buffer Configuration*

**Purpose** Verify that the ingress and egress global shared buffer pools are correctly configured and partitioned among the shared buffer types.

**Action** List the global shared buffer configuration using the operational mode command **show class-of-service shared-buffer**:

```
user@switch> show class-of-service shared-buffer
root@dcbg-tp-pa-02> show class-of-service shared-buffer
Ingress:
Total Buffer      : 9360.00 KB
Dedicated Buffer  : 2158.00 KB
Shared Buffer     : 7202.00 KB
  Lossless       : 1080.30 KB
  Lossless Headroom : 5761.60 KB
  Lossy          : 360.10 KB

Lossless Headroom Utilization:
Node Device      Total      Used      Free
0                5761.60 KB  0.00 KB  5761.60 KB

Egress:
Total Buffer      : 9360.00 KB
```



```

Dedicated Buffer : 2704.00 KB
Shared Buffer    : 6656.00 KB
  Lossless      : 5990.40 KB
  Multicast     : 332.80 KB
  Lossy         : 332.80 KB

```

**Meaning** The **show class-of-service shared-buffer** operational command shows all of the ingress and egress global shared buffer settings, including the buffer partitioning.

For the ingress shared buffers, the command output shows:

- The total switch buffer pool is 9360 KB (9 MB).
- The dedicated buffer pool is 2158 KB. This is the size of the global ingress dedicated buffer pool when you configure the ingress shared buffer pool as 100 percent of the available (user-configurable) buffer space. This is the minimum size of the reserved, ingress dedicated ingress buffer pool (not user-configurable). If you configure the shared buffer as less than 100 percent of the available buffer pool, the remaining buffer space is added to the dedicated buffer pool.
- With the ingress shared buffer pool configured as 100 percent of the available buffers, the total size of the ingress shared buffer pool is 7202 KB.
- The ingress shared buffer pool is partitioned to allocate:
  - 1080 KB to lossless traffic
  - 5761.60 KB to lossless headroom traffic
  - 360.10 KB to lossy unicast traffic
- The Lossless Headroom Utilization field shows how much of the buffer space reserved for paused traffic is used. Of the total available lossless headroom buffer space of 5761.60 KB, currently no buffer space is being used, so all 5761.60 KB of buffer space is free.

For the egress shared buffers, the command output shows:

- The total switch buffer pool is 9360 KB (9 MB).
- The dedicated buffer pool is 2704 KB. This is the size of the global egress dedicated buffer pool when you configure the egress shared buffer pool as 100 percent of the available (user-configurable) buffer space. This is the minimum size of the reserved, egress dedicated buffer pool (not user-configurable). If you configure the shared buffer as less than 100 percent of the available buffer pool, the remaining buffer space is added to the dedicated buffer pool.
- With the egress shared buffer pool configured as 100 percent of the available buffers, the total size of the egress shared buffer pool is 6656 KB. This is less than the ingress shared buffer pool because the switch reserves more egress dedicated buffer space than ingress dedicated buffer space. (More dedicated buffer space means less shared buffer space, and more shared buffer space means less dedicated buffer space.)
- The egress shared buffer pool is partitioned to allocate:
  - 5990.40 KB to lossless traffic



- 332.80 KB to multicast traffic
- 332.80 KB to lossy unicast traffic

**Related Documentation**

- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Best-Effort Unicast Traffic on page 5103](#)
- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Multicast Traffic on page 5109](#)
- [Configuring Global Ingress and Egress Shared Buffers on page 5153](#)
- [Understanding CoS Buffer Configuration on page 4914](#)

## Example: Configuring DCBX Application Protocol TLV Exchange

Data Center Bridging Capability Exchange protocol (DCBX) discovers the data center bridging (DCB) capabilities of connected peers by exchanging application configuration information. DCBX detects feature misconfiguration and mismatches and can configure DCB on peers. DCBX is an extension of the Link Layer Discovery Protocol (LLDP). LLDP must remain enabled on every interface on which you want to use DCBX.



**NOTE:** LLDP and DCBX are enabled by default on all interfaces.

The switch supports DCBX application protocol exchange for Layer 2 and Layer 4 applications such as the Internet Small Computer System Interface (iSCSI). You specify applications by EtherType (for Layer 2 applications) or by the destination port and protocol (for Layer 4 applications; the protocol can be either TCP or UDP).

The QFX Series handles Fibre Channel over Ethernet (FCoE) application protocol exchange differently than other protocols in some cases:

- If FCoE is the only application for which you want to enable DCBX application protocol TLV exchange on an interface, you do not have to explicitly configure the FCoE application or an application map. By default, the QFX Series exchanges FCoE application protocol TLVs on all interfaces that carry FCoE traffic (traffic mapped to the **fcoe** forwarding class) and have priority-based flow control (PFC) enabled on the FCoE priority (the FCoE IEEE 802.1p code point). The default priority mapping for the FCoE application is IEEE 802.1p code point 011 (the default **fcoe** forwarding class code point).
- If you want an interface to use DCBX to exchange application protocol TLVs for any other applications in addition to FCoE, you must configure the applications (including FCoE), define an application map (including FCoE), and apply the application map to the interface. If you apply an application map to an interface, you must explicitly configure the FCoE application, or the interface does not exchange FCoE application protocol TLVs.

This example shows how to configure interfaces to exchange both Layer 2 and Layer 4 applications by configuring one interface to exchange iSCSI and FCoE application protocol



information and configuring another interface to exchange iSCSI and Precision Time Protocol (PTP) application protocol information.

- [Requirements on page 5121](#)
- [Overview on page 5121](#)
- [Configuration on page 5124](#)
- [Verification on page 5126](#)

## Requirements

This example uses the following hardware and software components:

- Juniper Networks QFX Series device
- Junos OS Release 12.1 or later for the QFX Series

## Overview

The switch supports DCBX application protocol exchange for:

- Layer 2 applications, defined by EtherType
- Layer 4 applications, defined by destination port and protocol



**NOTE:** DCBX also advertises PFC and enhanced transmission selection (ETS) information. See [“Configuring DCBX Autonegotiation” on page 4601](#) for how DCBX negotiates and advertises configuration information for these features and for the applications.

DCBX is configured on a per-interface basis for each supported feature or application. For applications that you want to enable for DCBX application protocol exchange, you must:

- Define the application name and configure the EtherType or the destination port and protocol (TCP or UDP) of the application. Use the EtherType for Layer 2 applications, and use the destination port and protocol for Layer 4 protocols.
- Map the application to an IEEE 802.1p code point in an application map.
- Add the application map to DCBX interface.

In addition, for all applications (including FCoE, even when you do not use an application map), you either must create an IEEE 802.1p classifier and apply it to the appropriate ingress interfaces or use the default classifier. A classifier maps the code points of incoming traffic to a forwarding class and a loss priority so that ingress traffic is assigned to the correct class of service (CoS). The forwarding class determines the output queue on the egress interface.

If you do not create classifiers, trunk and tagged-access ports use the unicast IEEE 802.1 default trusted classifier. [Table 317 on page 4542](#) shows the default mapping of IEEE 802.1 code-point values to unicast forwarding classes and loss priorities for ports in trunk mode



or tagged-access mode. [Table 318 on page 4542](#) shows the default untrusted classifier IEEE 802.1 code-point values to unicast forwarding class mapping for ports in access mode.

**Table 435: Default IEEE 802.1 Classifiers for Trunk Ports and Tagged-Access Ports (Default Trusted Classifier)**

| Code Point | Forwarding Class | Loss Priority |
|------------|------------------|---------------|
| be (000)   | best-effort      | low           |
| be1 (001)  | best-effort      | low           |
| ef (010)   | best-effort      | low           |
| ef1 (011)  | fcoe             | low           |
| af11 (100) | no-loss          | low           |
| af12 (101) | best-effort      | low           |
| nc1 (110)  | network-control  | low           |
| nc2 (111)  | network-control  | low           |

**Table 436: Default IEEE 802.1 Unicast Classifiers for Access Ports (Default Untrusted Classifier)**

| Code Point | Forwarding Class | Loss Priority |
|------------|------------------|---------------|
| 000        | best-effort      | low           |
| 001        | best-effort      | low           |
| 010        | best-effort      | low           |
| 011        | best-effort      | low           |
| 100        | best-effort      | low           |
| 101        | best-effort      | low           |
| 110        | best-effort      | low           |
| 111        | best-effort      | low           |

### **Topology**

This example shows how to configure DCBX application protocol exchange for three protocols (iSCSI, PTP, and FCoE) on two interfaces. One interface exchanges iSCSI and



FCoE application protocol information, and the other interface exchanges iSCSI and PTP application protocol information.



**NOTE:** You must map FCoE traffic to the interfaces on which you want to forward FCoE traffic. You must also enable PFC on the FCoE interfaces and create an ingress classifier for FCoE traffic, or else use the default classifier.

Table 319 on page 4543 shows the configuration components for this example.

**Table 437: Components of DCBX Application Protocol Exchange Configuration Topology**

| Component                   | Settings                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hardware                    | QFX Series device                                                                                                                                                                                                                                                                                                                                            |
| LLDP                        | Enabled by default on Ethernet interfaces                                                                                                                                                                                                                                                                                                                    |
| DCBX                        | Enabled by default on Ethernet interfaces                                                                                                                                                                                                                                                                                                                    |
| iSCSI application (Layer 4) | Application name— <b>iscsi</b><br>protocol— <b>TCP</b><br>destination-port— <b>3260</b><br>code-points— <b>111</b>                                                                                                                                                                                                                                           |
| PTP application (Layer 2)   | Application name— <b>ptp</b><br>ether-type— <b>0x88F7</b><br>code-points— <b>001, 101</b>                                                                                                                                                                                                                                                                    |
| FCoE application (Layer 2)  | Application name— <b>fcoe</b><br>ether-type— <b>0x8906</b><br>code-points— <b>011</b><br><br><b>NOTE:</b> You explicitly configure the FCoE application because you are applying an application map to the interface. When you apply an application map to an interface, all applications must be explicitly configured and included in the application map. |
| Application maps            | <b>dcbx-iscsi-fcoe-app-map</b> —Maps the iSCSI and FCoE applications to IEEE 802.1p code points<br><br><b>dcbx-iscsi-ptp-app-map</b> —Maps iSCSI and PTP applications to IEEE 802.1p code points                                                                                                                                                             |



**Table 437: Components of DCBX Application Protocol Exchange Configuration Topology (*continued*)**

| Component                                                                                                         | Settings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Interfaces                                                                                                        | <p><b>xe-0/0/10</b>—Configured to exchange FCoE and iSCSI application TLVs (uses application map <b>dcbx-iscsi-fcoe-app-map</b>, carries FCoE traffic, and has PFC enabled on the FCoE priority)</p> <p><b>xe-0/0/11</b>—Configured to exchange iSCSI and PTP application TLVs (uses application map <b>dcbx-iscsi-ptp-app-map</b>)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| PFC congestion notification profile for FCoE application exchange                                                 | <p><b>fcoe-cnp:</b></p> <ul style="list-style-type: none"> <li>Code point—<b>011</b></li> <li>Interface—<b>xe-0/0/10</b></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Behavior aggregate classifiers (map forwarding classes to incoming packets by the packet's IEEE 802.1 code point) | <p><b>fcoe-iscsi-cl1:</b></p> <ul style="list-style-type: none"> <li>Maps the <b>fcoe</b> forwarding class to the IEEE 802.1p code point used for the FCoE application (<b>011</b>) and a loss priority of <b>high</b></li> <li>Maps the <b>network-control</b> forwarding class to the IEEE 802.1p code point used for the iSCSI application (<b>111</b>) and a loss priority of <b>high</b></li> <li>Applied to interface <b>xe-0/0/10</b></li> </ul> <p><b>iscsi-ptp-cl2:</b></p> <ul style="list-style-type: none"> <li>Maps the <b>network-control</b> forwarding class to the IEEE 802.1p code point used for the iSCSI application (<b>111</b>) and a loss priority of <b>low</b></li> <li>Maps the <b>best-effort</b> forwarding class to the IEEE 802.1p code points used for the PTP application (<b>001</b> and <b>101</b>) and a loss priority of <b>low</b></li> <li>Applied to interface <b>xe-0/0/11</b></li> </ul> |



**NOTE:** This example does not include scheduling (bandwidth allocation) configuration or lossless configuration for the iSCSI forwarding class.

### Configuration

#### CLI Quick Configuration

To quickly configure DCBX application protocol exchange, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```

set applications application iSCSI protocol tcp destination-port 3260
set applications application FCoE ether-type 0x8906
set applications application PTP ether-type 0x88F7
set policy-options application-maps dcbx-iscsi-fcoe-app-map application iSCSI code-points 111
set policy-options application-maps dcbx-iscsi-fcoe-app-map application FCoE code-points 011
set policy-options application-maps dcbx-iscsi-ptp-app-map application iSCSI code-points 111
set policy-options application-maps dcbx-iscsi-ptp-app-map application PTP code-points [001 101]

```



```

set protocols dcbx interface xe-0/0/10 application-map dcbx-iscsi-fcoe-app-map
set protocols dcbx interface xe-0/0/11 application-map dcbx-iscsi-ptp-app-map
set class-of-service congestion-notification-profile fcoe-cnp input ieee-802.1 code-point 011 pfc
set class-of-service interfaces xe-0/0/10 congestion-notification-profile fcoe-cnp
set class-of-service classifiers ieee-802.1 fcoe-iscsi-cl1 import default forwarding-class fcoe
loss-priority high code-points 011
set class-of-service classifiers ieee-802.1 fcoe-iscsi-cl1 import default forwarding-class
network-control loss-priority high code-points 111
set class-of-service classifiers ieee-802.1 iscsi-ptp-cl2 import default forwarding-class
network-control loss-priority low code-points 111
set class-of-service classifiers ieee-802.1 iscsi-ptp-cl2 import default forwarding-class best-effort
loss-priority low code-points [001 101]
set class-of-service interfaces xe-0/0/10 unit 0 classifiers ieee-802.1 fcoe-iscsi-cl1
set class-of-service interfaces xe-0/0/11 unit 0 classifiers ieee-802.1 iscsi-ptp-cl2

```

### Configuring DCBX Application Protocol TLV Exchange

**Step-by-Step Procedure** To define the applications, map the applications to IEEE 802.1p code points, apply the applications to interfaces, and create classifiers for DCBX application protocol exchange:

1. Define the iSCSI application by specifying its protocol and destination port, and define the FCoE and PTP applications by specifying their EtherTypes.  

```

[edit applications]
user@switch# set application iSCSI protocol tcp destination-port 3260
user@switch# set application FCoE ether-type 0x8906
user@switch# set application PTP ether-type 0x88F7

```
2. Define an application map that maps the iSCSI and FCoE applications to IEEE 802.1p code points.  

```

[edit policy-options]
user@switch# set application-maps dcbx-iscsi-fcoe-app-map application iSCSI code-points 111
user@switch# set application-maps dcbx-iscsi-fcoe-app-map application FCoE code-points 011

```
3. Define the application map that maps the iSCSI and PTP applications to IEEE 802.1p code points.  

```

[edit policy-options]
user@switch# set application-maps dcbx-iscsi-ptp-app-map application iSCSI code-points 111
user@switch# set application-maps dcbx-iscsi-ptp-app-map application PTP code-points [001 101]

```
4. Apply the iSCSI and FCoE application map to interface **xe-0/0/10**, and apply the iSCSI and PTP application map to interface **xe-0/0/11**.  

```

[edit protocols dcbx]
user@switch# set interface xe-0/0/10 application-map dcbx-iscsi-fcoe-app-map
user@switch# set interface xe-0/0/11 application-map dcbx-iscsi-ptp-app-map

```
5. Create the congestion notification profile to enable PFC on the FCoE code point (**011**), and apply the congestion notification profile to interface **xe-0/0/10**.  

```

[edit class-of-service]
user@switch# set congestion-notification-profile fcoe-cnp input ieee-802.1 code-point 011 pfc
user@switch# set interfaces xe-0/0/10 congestion-notification-profile fcoe-cnp

```



6. Configure the classifier to apply to the interface that exchanges iSCSI and FCoE application information.

```
[edit class-of-service classifiers]
user@switch# set ieee-802.1 fcoe-iscsi-cl1 import default forwarding-class fcoe loss-priority
high code-points 011
user@switch# set ieee-802.1 fcoe-iscsi-cl1 import default forwarding-class network-control
loss-priority high code-points 111
```

7. Configure the classifier to apply to the interface that exchanges iSCSI and PTP application information.

```
[edit class-of-service classifiers]
user@switch# set ieee-802.1 iscsi-ptp-cl2 import default forwarding-class network-control
loss-priority low code-points 111
user@switch# set ieee-802.1 iscsi-ptp-cl2 import default forwarding-class best-effort
loss-priority low code-points [001 101]
```

8. Apply the classifiers to the appropriate interfaces.

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/10 unit 0 classifiers ieee-802.1 fcoe-iscsi-cl1
user@switch# set interfaces xe-0/0/11 unit 0 classifiers ieee-802.1 iscsi-ptp-cl2
```

---

### Verification

To verify that DCBX application protocol exchange configuration has been created and is operating properly, perform these tasks:

- [Verifying the Application Configuration on page 5126](#)
- [Verifying the Application Map Configuration on page 5127](#)
- [Verifying DCBX Application Protocol Exchange Interface Configuration on page 5127](#)
- [Verifying the PFC Configuration on page 5128](#)
- [Verifying the Classifier Configuration on page 5128](#)

#### *Verifying the Application Configuration*

**Purpose** Verify that DCBX applications have been configured.

**Action** List the applications by using the configuration mode command **show applications**:

```
user@switch# show applications
application iSCSI {
  protocol tcp;
  destination-port 3260;
}

application fcoe {
  ether-type 0x8906;
}

application ptp {
  ether-type 0x88F7;
}
```

**Meaning** The **show applications** configuration mode command lists all of the configured applications and either their protocol and destination port (Layer 4 applications) or their



EtherType (Layer 2 applications). The command output shows that the iSCSI application is configured with the **tcp** protocol and destination port **3260**, the FCoE application is configured with the EtherType **0x8906**, and that the PTP application is configured with the EtherType **0x88F7**.

### *Verifying the Application Map Configuration*

**Purpose** Verify that the application maps have been configured.

**Action** List the application maps by using the configuration mode command **show policy-options application-maps**:

```
user@switch# show policy-options application-maps
dcbx-iscsi-fcoe-app-map {
    application iSCSI code-points 111;
    application FCoE code-points 011;
}

dcbx-iscsi-ntp-app-map {
    application iSCSI code-points 111;
    application PTP code-points [001 101];
}
```

**Meaning** The **show policy-options application-maps** configuration mode command lists all of the configured application maps and the applications that belong to each application map. The command output shows that there are two application maps, **dcbx-iscsi-fcoe-app-map** and **dcbx-iscsi-ntp-app-map**.

The application map **dcbx-iscsi-fcoe-app-map** consists of the iSCSI application, which is mapped to IEEE 802.1p code point **111**, and the FCoE application, which is mapped to IEEE 802.1p code point **011**.

The application map **dcbx-iscsi-ntp-app-map** consists of the iSCSI application, which is mapped to IEEE 802.1p code point **111**, and the PTP application, which is mapped to IEEE 802.1p code points **001** and **101**.

### *Verifying DCBX Application Protocol Exchange Interface Configuration*

**Purpose** Verify that the application maps have been applied to the correct interfaces.

**Action** List the application maps by using the configuration mode command **show protocols dcbx**:

```
user@switch# show protocols dcbx
interface xe-0/0/10.0 {
    application-map dcbx-iscsi-fcoe-app-map;
}

interface xe-0/0/11.0 {
    application-map dcbx-iscsi-ntp-app-map;
}
```

**Meaning** The **show protocols dcbx** configuration mode command lists whether the interfaces are enabled for DCBX and lists the application map applied to each interface. The command



output shows that interfaces **xe-0/0/10.0** and **xe-0/0/11.0** are enabled for DCBX, and that interface **xe-0/0/10.0** uses application map **dcbx-iscsi-fcoe-app-map**, and interface **xe-0/0/11.0** uses application map **dcbx-iscsi-ptp-app-map**.

### *Verifying the PFC Configuration*

**Purpose** Verify that PFC has been enabled on the FCoE code point and applied to the correct interface.

**Action** Display the PFC configuration to verify that PFC is enabled on the FCoE code point (**011**) in the congestion notification profile **fcoe-cnp** by using the configuration mode command **show class-of-service congestion-notification-profile**:

```
user@switch# show class-of-service congestion-notification-profile
fcoe-cnp {
  input {
    ieee-802.1 {
      code-point 011 {
        pfc;
      }
    }
  }
}
```

Display the class-of-service (CoS) interface information to verify that the correct interface has PFC enabled for the FCoE application by using the configuration mode command **show class-of-service interfaces**:

```
user@switch# show class-of-service interfaces
xe-0/0/10 {
  congestion-notification-profile fcoe-cnp;
}
```



**NOTE:** The sample output does not include all of the information this command can show. The output is abbreviated to focus on verifying the PFC configuration.

**Meaning** The **show class-of-service congestion-notification-profile** configuration mode command lists the configured congestion notification profiles. The command output shows that the congestion notification profile **fcoe-cnp** has been configured and has enabled PFC on the IEEE 802.1p code point **011** (the default FCoE code point).

The **show class-of-service interfaces** configuration mode command shows the interface CoS configuration. The command output shows that the congestion notification profile **fcoe-cnp**, which enables PFC on the FCoE code point, is applied to interface **xe-0/0/10**.

### *Verifying the Classifier Configuration*

**Purpose** Verify that the classifiers have been configured and applied to the correct interfaces.



**Action** Display the classifier configuration by using the configuration mode command **show class-of-service**:

```
user@switch# show class-of-service
classifiers {
  ieee-802.1 fcoe-iscsi-cl1 {
    import default;
    forwarding-class network-control {
      loss-priority high code-points 111;
    }
    forwarding-class fcoe {
      loss-priority high code-points 011;
    }
  }
  ieee-802.1 iscsi-ntp-cl2 {
    import default;
    forwarding-class network-control {
      loss-priority low code-points 111;
    }
    forwarding-class best-effort {
      loss-priority low code-points [ 001 101 ];
    }
  }
}
interfaces {
  xe-0/0/10 {
    congestion-notification-profile fcoe-cnp;
    unit 0 {
      classifiers {
        ieee-802.1 fcoe-iscsi-cl1;
      }
    }
  }
  xe-0/0/11 {
    unit 0 {
      classifiers {
        ieee-802.1 iscsi-ntp-cl2;
      }
    }
  }
}
```



**NOTE:** The sample output does not include all of the information this command can show. The output is abbreviated to focus on verifying the classifier configuration.

**Meaning** The **show class-of-service** configuration mode command lists the classifier and CoS interface configuration, as well as other information not shown in this example. The command output shows that there are two classifiers configured, **fcoe-iscsi-cl1** and **iscsi-ntp-cl2**.

Classifier **fcoe-iscsi-cl1** uses the **default** classifier as a template and edits the template as follows:



- The forwarding class **network-control** is set to a loss priority of **high** and is mapped to code point **111** (the code point mapped to the iSCSI application).
- The forwarding class **fcoe** is set to a loss priority of **high** and is mapped to code point **011** (the code point mapped by default to the FCoE application).

Classifier **iscsi-ptp-cl2** uses the **default** classifier as a template and edits the template as follows:

- The forwarding class **network-control** is set to a loss priority of **low** and is mapped to IEEE 802.1p code point **111** (the code point mapped to the iSCSI application).
- The forwarding class **best-effort** is set to a loss priority of **low** and is mapped to IEEE 802.1p code points **001** and **101** (the code points mapped by default to the PTP application).

The command output also shows that classifier **fcoe-iscsi-cl1** is mapped to interface **xe-0/0/10.0** and that classifier **iscsi-ptp-cl2** is mapped to interface **xe-0/0/11.0**.

#### Related Documentation

- [Example: Configuring Unicast Classifiers on page 5014](#)
- [Defining an Application for DCBX Application Protocol TLV Exchange on page 4604](#)
- [Configuring an Application Map for DCBX Application Protocol TLV Exchange on page 4606](#)
- [Applying an Application Map to an Interface for DCBX Application Protocol TLV Exchange on page 4607](#)
- [Configuring DCBX Autonegotiation on page 4601](#)
- [show dcbx on page 4693](#)
- [show dcbx neighbors on page 4694](#)
- [Understanding DCBX Application Protocol TLV Exchange on page 4472](#)
- [Using DCBX Protocol to Lower Costs](#)

## Configuration Tasks

---

- [Configuring CoS on page 5131](#)
- [Defining CoS Code-Point Aliases on page 5133](#)
- [Defining CoS Unicast BA Classifiers on page 5133](#)
- [Defining CoS Multidestination \(Multicast, Broadcast, DLF\) BA Classifiers on page 5135](#)
- [Configuring CoS Tail-Drop Profiles on page 5136](#)
- [Configuring CoS Drop Profile Maps on page 5137](#)
- [Defining CoS Forwarding Classes on page 5137](#)
- [Defining CoS Forwarding Class Sets on page 5139](#)
- [Defining CoS Queue Schedulers on page 5139](#)



- [Defining CoS Queue Scheduling Priority on page 5142](#)
- [Changing the Host Outbound Traffic Default Queue Mapping on page 5143](#)
- [Defining CoS Traffic Control Profiles \(Priority Group Scheduling\) on page 5143](#)
- [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
- [Enabling and Disabling CoS Symmetric Ethernet PAUSE Flow Control on page 5148](#)
- [Configuring CoS Asymmetric Ethernet PAUSE Flow Control on page 5149](#)
- [Configuring CoS Fixed Classifier Rewrite Values for Native FC Interfaces \(NP\\_Ports\) on page 5151](#)
- [Configuring Global Ingress and Egress Shared Buffers on page 5153](#)
- [Defining CoS Rewrite Rules on page 5155](#)
- [Assigning CoS Components to Interfaces on page 5157](#)
- [Configuring the DCBX Mode on page 5158](#)
- [Configuring DCBX Autonegotiation on page 5159](#)
- [Disabling the ETS Recommendation TLV on page 5162](#)
- [Defining an Application for DCBX Application Protocol TLV Exchange on page 5162](#)
- [Configuring an Application Map for DCBX Application Protocol TLV Exchange on page 5164](#)
- [Applying an Application Map to an Interface for DCBX Application Protocol TLV Exchange on page 5165](#)

## Configuring CoS

The class-of-service topics describe how to configure the Junos CoS components for the QFX Series. You can configure forwarding classes for transmitting packets, define which packets are placed into each output queue, and schedule the transmission service level for each queue. After defining the CoS components, you assign classifiers to the required physical and logical interfaces.

You can configure various CoS components individually or in combination to define CoS services.



**NOTE:** When you change or when you deactivate and then reactivate the class-of-service configuration, the system experiences packet drops because the system momentarily blocks traffic to change the mapping of incoming traffic to input queues.

The following topics describe how to configure CoS components :

- [Example: Configuring Unicast Classifiers on page 5014](#)
- [Example: Configuring Multidestination \(Multicast, Broadcast, DLF\) Classifiers on page 5017](#)
- [Example: Configuring Tail-Drop Profiles on page 5019](#)
- [Example: Configuring Drop Profile Maps on page 5022](#)



- [Example: Configuring Forwarding Classes on page 5024](#)
- [Example: Configuring Forwarding Class Sets on page 5027](#)
- [Example: Configuring Queue Schedulers on page 5030](#)
- [Example: Configuring Queue Scheduling Priority on page 5035](#)
- [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)
- [Example: Configuring Minimum Guaranteed Output Bandwidth on page 5040](#)
- [Example: Configuring Maximum Output Bandwidth on page 5044](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)
- [Example: Configuring CoS for FCoE Transit Switch Traffic Across an MC-LAG on page 4517](#)
- [Example: Configuring IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 5094](#)
- [Example: Configuring Two or More Lossless FCoE IEEE 802.1p Priorities on Different FCoE Transit Switch Interfaces on page 5065](#)
- [Example: Configuring Lossless FCoE Traffic When the Converged Ethernet Network Does Not Use IEEE 802.1p Priority 3 for FCoE Traffic \(FCoE Transit Switch\) on page 5048](#)
- [Example: Configuring Two or More Lossless FCoE Priorities on the Same FCoE Transit Switch Interface on page 5056](#)
- [Example: Configuring Lossless IEEE 802.1p Priorities on Ethernet Interfaces for Multiple Applications \(FCoE and iSCSI\) on page 5078](#)
- [Defining CoS Code-Point Aliases on page 5133](#)
- [Defining CoS Rewrite Rules on page 5155](#)
- [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
- [Configuring CoS Fixed Classifier Rewrite Values for Native FC Interfaces \(NP\\_Ports\) on page 5151](#)
- [Assigning CoS Components to Interfaces on page 5157](#)
- [Changing the Host Outbound Traffic Default Queue Mapping on page 5143](#)
- [Defining CoS Traffic Control Profiles \(Priority Group Scheduling\) on page 5143](#)
- [Enabling and Disabling CoS Symmetric Ethernet PAUSE Flow Control on page 5148](#)
- [Configuring CoS Asymmetric Ethernet PAUSE Flow Control on page 5149](#)
- [Configuring the DCBX Mode on page 4600](#)
- [Configuring DCBX Autonegotiation on page 4601](#)
- [Disabling the ETS Recommendation TLV on page 4604](#)
- [Defining an Application for DCBX Application Protocol TLV Exchange on page 4604](#)



- [Configuring an Application Map for DCBX Application Protocol TLV Exchange on page 4606](#)
- [Applying an Application Map to an Interface for DCBX Application Protocol TLV Exchange on page 4607](#)

## Defining CoS Code-Point Aliases

You can use code-point aliases to streamline the process of configuring CoS features on your switch. A code-point alias assigns a name to a pattern of code-point bits. You can use this name instead of the bit pattern when you configure other CoS components such as classifiers, drop-profile maps, and rewrite rules.

You can configure code-point aliases for the following CoS marker types:

- DSCP or DSCP IPv6—Handles incoming IPv4 or IPv6 packets.
- IEEE 802.1p—Handles Layer 2 CoS.

To configure a code-point alias:

1. Specify a CoS marker type (IEEE 802.1 or DSCP).
2. Assign an alias.
3. Specify the code point that corresponds to the alias.

```
[edit class-of-service code-point-aliases]
user@switch# set (dscp | dscp-ipv6 | ieee-802.1) alias-name code-point-bits
```

For example, to configure a code-point alias for an IEEE 802.1 CoS marker type that has the alias name `fcoe1` and maps to the code-point bits 011:

```
[edit class-of-service code-point-aliases]
user@switch# set ieee-802.1 fcoe1 011
```

### Related Documentation

- [Monitoring CoS Value Aliases on page 5270](#)
- [Understanding CoS Code-Point Aliases on page 4844](#)

## Defining CoS Unicast BA Classifiers

Packet classification associates incoming packets with a particular CoS servicing level. Behavior aggregate (BA) classifiers examine the Differentiated Services code point (DSCP or DSCP IPv6) value or IEEE 802.1p CoS value in the packet header to determine the CoS settings applied to the packet. BA classifiers allow you to set the forwarding class and loss priority of a packet based on the incoming CoS value.

Unicast traffic must use different classifiers than multdestination (multicast, broadcast, and destination lookup fail) traffic.

To configure a unicast BA classifier using the CLI:

1. Create a unicast BA classifier:



- To create a unicast BA classifier based on the default classifier, import the default DSCP, DSCP IPv6, or IEEE 802.1p classifier and associate it with a forwarding class, a loss priority, and a code point:

```
[edit class-of-service classifiers]
user@switch# set (dscp | ieee-802.1) classifier-name import default forwarding-class
forwarding-class-name loss-priority level code-points [aliases] [bit-patterns]
```

- To create a unicast BA classifier that is not based on the default classifier, create a DSCP, DSCP IPv6, or IEEE 802.1p classifier and associate it with a forwarding class, a loss priority, and a code point:

```
[edit class-of-service classifiers]
user@switch# set (dscp | ieee-802.1) classifier-name forwarding-class
forwarding-class-name loss-priority level code-points [aliases] [bit-patterns]
```

2. Apply the unicast classifier to a specific 10-Gigabit Ethernet interface or to all 10-Gigabit Ethernet interfaces or to all Fibre Channel interfaces on the switch.

- To apply the classifier to a specific interface:

```
[edit class-of-service interfaces]
user@switch# set interface-name unit unit classifiers (dscp | ieee-802.1) classifier-name
```

- To apply the classifier to all 10-Gigabit Ethernet interfaces on the switch, use wildcards for the interface name and the logical-interface (unit) number:

```
[edit class-of-service interfaces]
user@switch# set xe-* unit * classifiers (dscp | ieee-802.1) classifier-name
```

#### Related Documentation

- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Unicast Classifiers on page 5014](#)
- [Defining CoS Multidestination \(Multicast, Broadcast, DLF\) BA Classifiers on page 5135](#)
- [Monitoring CoS Classifiers on page 5265](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces on page 4851](#)



## Defining CoS Multidestination (Multicast, Broadcast, DLF) BA Classifiers

Packet classification associates incoming packets with a particular CoS servicing level. Behavior aggregate (BA) classifiers examine the Differentiated Services code point (DSCP) value or IEEE 802.1p CoS value in the packet header to determine the CoS settings applied to the packet. BA classifiers allow you to set the forwarding class and loss priority of a packet based on the incoming CoS value.



**NOTE:** DSCP IPv6 multidestination classifiers are not supported. IPv6 multidestination traffic uses the DSCP multidestination classifier.

Multidestination classifiers apply to all of the switch interfaces and handle multicast, broadcast, and destination lookup fail (DLF) traffic. You cannot apply a multidestination classifier to a single interface or to a range of interfaces.

Unicast and multidestination traffic must use different classifiers.

To configure a multidestination BA classifier using the CLI:

1. Create a DSCP or IEEE 802.1p classifier and associate it with a forwarding class, a loss priority, and a code point:

```
[edit class-of-service classifiers]
user@switch# set (dscp | ieee-802.1) classifier-name forwarding-class forwarding-class-name
loss-priority level code-points [aliases] [bit-patterns]
```

2. Configure the classifier as a multidestination classifier:

```
[edit class-of-service]
user@switch# set multi-destination classifiers (dscp | ieee-802.1) classifier-name
```

### Related Documentation

- [Example: Configuring Multidestination \(Multicast, Broadcast, DLF\) Classifiers on page 5017](#)
- [Defining CoS Unicast BA Classifiers on page 5133](#)
- [Monitoring CoS Classifiers on page 5265](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces on page 4851](#)



## Configuring CoS Tail-Drop Profiles

You can configure an interpolated weighted random early detection (WRED) tail-drop profile to control packet drop characteristics for different traffic loss priorities.



**NOTE:** You cannot enable WRED on multidestination (multicast) queues. You can enable WRED only on unicast queues.

Also, do not enable WRED on lossless traffic flows. Use priority-based flow control (PFC) to prevent packet loss on lossless forwarding classes.

*Interpolated* means that the switch creates a smooth drop curve from a drop start point to a drop end point, with a maximum drop rate that is reached at the drop end point.

The drop start point is the average queue fill level when the WRED algorithm starts to drop packets. Before the drop start point, no packets are scheduled to drop. Specify the drop start point using the first of two **fill-level** statements.

The drop end point is the average queue fill level at which all subsequently arriving packets are dropped. When the queue fill levels falls below the drop end point, packets begin to be forwarded again. (At the drop end point, the packet drop probability becomes 100 percent.) Specify the drop end point using the second of two **fill-level** statements.

The minimum drop rate is always 0. Specify the minimum drop rate using the first of two **drop-probability** statements. The maximum drop rate is the drop probability when the average queue fill level reaches the drop end point. Specify the maximum drop rate using the second of two **drop-probability** statements.

The drop rate is zero until the queue fill level reaches the drop start point. As the queue continues to fill, packets drop in smooth linear curve until the queue reaches the drop end point, when packets drop at the maximum drop rate. If the queue fills beyond the drop end point, all packets that match the drop profile are dropped.

To configure a tail-drop profile using the CLI:

- Name the drop profile and set the drop start point, drop end point, minimum drop rate, and maximum drop rate for the drop profile:

```
[edit class-of-service]
user@switch# set drop-profile drop-profile-name interpolate fill-level percentage fill-level
percentage drop-probability 0 drop-probability percentage
```

### Related Documentation

- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Tail-Drop Profiles on page 5019](#)
- [Defining CoS Queue Schedulers on page 5139](#)
- [Configuring CoS Drop Profile Maps on page 5137](#)
- [Understanding CoS Tail-Drop Profiles on page 4929](#)



## Configuring CoS Drop Profile Maps

A drop-profile map associates a tail-drop profile for traffic of a specified loss priority with a scheduler. When you use a scheduler map to map a scheduler to a forwarding class, the drop profile map associated with the scheduler applies the specified tail-drop profile to traffic in the forwarding class that matches the specified loss priority.

Drop profile maps enable you to configure different drop profiles for traffic of different loss priorities within the same scheduler. You can associate different drop profiles with low-priority, medium-high priority, and high-priority traffic within a single scheduler, and then map that scheduler to a forwarding class. This applies the appropriate drop profile to traffic of each loss priority in a forwarding class. Drop profile maps apply to all traffic protocols.

To configure a drop-profile map using the CLI:

- For the desired scheduler, configure the traffic loss priority and specify the drop profile you want to use to control the drop characteristics for traffic of that loss priority:

```
[edit class-of-service]
user@switch# set schedulers scheduler-name drop-profile-map loss-priority level protocol
any drop-profile drop-profile-name
```

### Related Documentation

- [Example: Configuring Drop Profile Maps on page 5022](#)
- [Configuring CoS Tail-Drop Profiles on page 5136](#)
- [Defining CoS Queue Schedulers on page 5139](#)
- [Understanding CoS Tail-Drop Profiles on page 4929](#)

## Defining CoS Forwarding Classes

Forwarding classes allow you to group packets for transmission. The switch supports a total of 12 forwarding classes. In order to forward traffic, you map (assign) the forwarding classes to unicast or multdestination (multicast, broadcast, and destination lookup fail) output queues.

The switch has 12 output queues. Queues 0 through 7 are for unicast traffic and queues 8 through 11 are for multicast traffic. Forwarding classes mapped to unicast queues must carry unicast traffic, and forwarding classes mapped to multdestination queues must carry multdestination traffic. There are four default unicast forwarding classes and one default multdestination forwarding class.

The default unicast forwarding classes are:

- **best-effort**—Best-effort traffic
- **fcoe**—Guaranteed delivery for FCoE traffic
- **no-loss**—Guaranteed delivery for TCP no-loss traffic
- **network-control**—Network control traffic



The default multidestination forwarding class is:

- **mcast**—Multidestination traffic

Map forwarding classes to queues using the **class** statement, which enables you to configure up to 12 forwarding classes. You can map more than one forwarding class to a single queue, but all forwarding classes mapped to a particular queue must be of the same type, either unicast or multicast. In addition, all forwarding classes mapped to a particular queue must be either lossless or lossy. You cannot mix lossless and lossy forwarding classes (traffic) on the same queue. Also, you cannot mix unicast and multicast forwarding classes on the same queue.

[edit [class-of-service forwarding-classes](#)]

```
user@switch# class class-name queue-num queue-number <no-loss>
```

---



**NOTE:** If you are using Junos OS Release 12.2 or later, use the default forwarding-class-to-queue mapping for the lossless **fcoe** and **no-loss** forwarding classes. If you explicitly configure the lossless forwarding classes, the traffic mapped to those forwarding classes is treated as lossy (**best-effort**) traffic and does *not* receive lossless treatment unless you include the optional **no-loss** packet drop attribute introduced in Junos OS Release 12.3 in the forwarding class configuration..

---



**NOTE:** Junos OS Release 11.3R1 and earlier supported an alternate method of mapping forwarding classes to queues that allowed you to map only one forwarding class to a queue using the statement:

[edit [class-of-service forwarding-classes](#)]

```
user@switch# queue queue-number class-name
```

The **queue** statement has been deprecated and is no longer valid in Junos OS Release 11.3R2 and later. If you have a configuration that uses the **queue** statement to map forwarding classes to queues, edit the configuration to replace the **queue** statement with the **class** statement.

---

#### Related Documentation

- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Forwarding Classes on page 5024](#)
- [Monitoring CoS Forwarding Classes on page 5266](#)
- [Understanding CoS Forwarding Classes on page 4860](#)



## Defining CoS Forwarding Class Sets

A forwarding class set is a priority group for enhanced transmission selection (ETS) traffic control. Each forwarding class set consists of one or more forwarding classes (priorities, which can also be considered as output queues).

You can configure up to three unicast forwarding class sets and one multicast forwarding class set.

To configure a forwarding class set using the CLI:

1. Assign one or more forwarding classes to the forwarding class set:

```
[edit class-of-service]
user@switch# set forwarding-class-sets forwarding-class-set-name class
forwarding-class-name
```

2. Map the forwarding class set to an interface:

```
[edit class-of-service]
user@switch# set interfaces interface-name forwarding-class-set forwarding-class-set-name
```

### Related Documentation

- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Forwarding Class Sets on page 5027](#)
- [Defining CoS Queue Schedulers on page 5139](#)
- [Defining CoS Traffic Control Profiles \(Priority Group Scheduling\) on page 5143](#)
- [Understanding CoS Forwarding Class Sets \(Priority Groups\) on page 4865](#)

## Defining CoS Queue Schedulers

Schedulers define the CoS properties of output queues. These properties include the amount of interface bandwidth assigned to the queue, the priority of the queue, the tail-drop profiles associated with the queue, and the queue buffer size.

The parameters you configure in a scheduler define the following characteristics for the queues mapped to the scheduler:



- **transmit-rate**—Minimum bandwidth, also known as the committed information rate (CIR), set as a percentage rate or as an absolute value in bits per second. The transmit rate also determines the amount of excess (extra) priority group bandwidth that the queue can share. Extra priority group bandwidth is allocated among the queues in the priority group in proportion to the transmit rate of each queue.



**NOTE:** Include the preamble bytes and interframe gap (IFG) bytes as well as the data bytes in your bandwidth calculations.



**NOTE:** You cannot configure a transmit rate for strict-high priority queues. Queues (forwarding classes) with a configured transmit rate cannot be included in a forwarding class set that has strict-high priority queues.

- **shaping-rate**—Maximum bandwidth, also known as the peak information rate (PIR), set as a percentage rate or as an absolute value in bits per second.



**NOTE:** Include the preamble bytes and interframe gap (IFG) bytes as well as the data bytes in your bandwidth calculations.

- **priority**—One of two bandwidth priorities that queues associated with a scheduler can receive:
  - **low**—The scheduler has low priority.
  - **strict-high**—The scheduler has strict-high priority. You can configure only one queue as a strict-high priority queue. Strict-high priority allocates the scheduled bandwidth to the queue before any other queue receives bandwidth. Other queues receive the bandwidth that remains after the strict-high queue has been serviced.
- **drop-profile-map**—Drop profile mapping to a loss priority and protocol to apply WRED to the scheduler.
- **buffer-size**—Size of the queue buffer as a percentage of the dedicated buffer space on the port, or as a proportional share of the dedicated buffer space on the port that remains after the explicitly configured queues are served.



**NOTE:** Queues might not receive the egress bandwidth configured in the queue scheduler when a port's egress queues are congested. This can occur when the ingress port buffer fills above a certain threshold. If this happens, configure a drop profile for the queue on the port that is receiving its configured bandwidth (this queue is preventing the other queues on the port from receiving their configured bandwidth). The drop profile applies a weighted random early detection (WRED) algorithm to the queue and prevents the queue from impacting the other queues on the port.



To apply scheduling properties to traffic, map schedulers to forwarding classes using a scheduler map, and then associate the scheduler map with the interfaces. This applies the configured scheduling to the traffic in the specified forwarding class on the associated interface. Using different scheduler maps, you can map different schedulers to the same traffic (the same forwarding class) to apply different scheduling to that traffic on different interfaces.

To configure a scheduler using the CLI:

1. Name the scheduler and define the minimum guaranteed bandwidth for the queue:

```
[edit class-of-service]
user@switch# set schedulers scheduler-name transmit-rate (rate | percent percentage)
```

2. Define the maximum bandwidth for the queue:

```
[edit class-of-service schedulers scheduler-name]
user@switch# set shaping-rate (rate | percent percentage)
```

3. Define the queue priority:

```
[edit class-of-service schedulers scheduler-name]
user@switch# set priority level
```

4. Define the drop profile using a drop profile map:

```
[edit class-of-service schedulers scheduler-name]
user@switch# set drop-profile-map loss-priority (low | medium-high | high) protocol protocol
drop-profile drop-profile-name
```

5. Configure the size of the port dedicated buffer space for the queue:

```
[edit class-of-service schedulers scheduler-name]
user@switch# set buffer-size percent 20
```

6. Configure a scheduler map to map the scheduler to a forwarding class, which applies the scheduler's properties to the traffic in that forwarding class:

```
[edit class-of-service]
user@switch# set scheduler-maps scheduler-map-name forwarding-class
forwarding-class-name scheduler scheduler-name
```

7. Assign the scheduler map to one or more interfaces to apply the scheduling to the traffic that belongs to the specified forwarding class on those interfaces:

```
[edit class-of-service]
user@switch# set interfaces interface-name scheduler-map scheduler-map-name
```

#### Related Documentation

- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Queue Schedulers on page 5030](#)
- [Example: Configuring Minimum Guaranteed Output Bandwidth on page 5040](#)
- [Example: Configuring Maximum Output Bandwidth on page 5044](#)
- [Defining CoS Queue Scheduling Priority on page 5142](#)
- [Configuring CoS Tail-Drop Profiles on page 5136](#)
- [Monitoring CoS Scheduler Maps on page 5269](#)
- [Understanding CoS Output Queue Schedulers on page 4876](#)



- [Understanding CoS Priority Group Scheduling on page 4883](#)
- [Understanding CoS Buffer Configuration on page 4914](#)

## Defining CoS Queue Scheduling Priority

You can configure the scheduling priority of individual queues by specifying the priority in a scheduler, and then associating the scheduler with a queue by using a scheduler map. Queues can have one of two bandwidth priorities:

- **strict-high** —The scheduler has strict-high priority. You can configure only one queue as a strict-high priority queue. Strict-high priority allocates the scheduled bandwidth to the queue before any other queue receives bandwidth. Other queues receive the bandwidth that remains after the strict-high queue has been serviced.
- **low**—Low priority. Traffic with this priority is serviced after any queue that has a **strict-high** priority.
- To configure queue priority using the CLI:

```
[edit class-of-service]  
user@switch# set schedulers scheduler-name priority level
```

### Related Documentation

- [Example: Configuring Queue Scheduling Priority on page 5035](#)
- [Defining CoS Queue Schedulers on page 5139](#)
- [Monitoring CoS Scheduler Maps on page 5269](#)
- [Understanding CoS Output Queue Schedulers on page 4876](#)



## Changing the Host Outbound Traffic Default Queue Mapping

If you do not want to use the default mapping of host Routing Engine and CPU outbound traffic to queues, you can change the default output queue. You can also change the default DSCP bits used in the type of service (ToS) field of packets generated by the Routing Engine.

Configuring a queue for host outbound traffic maps all traffic that the host generates to one forwarding class (queue). The configuration is global and applies to all host-generated traffic on the switch. Configuring a forwarding class for host outbound traffic does not affect transit or incoming traffic.



**NOTE:** Fibre Channel over Ethernet (FCoE) Initialization Protocol (FIP) packets generated by the CPU are always transmitted on the `fcoe` queue (queue 3), even if you configure a queue for host outbound traffic. This helps to ensure lossless behavior for FCoE traffic. QFabric systems classify FIP control packets into the same traffic class (`fcoe`) across the Interconnect device (fabric) and the egress Node device.

To change the host outbound traffic egress queue by including the **host-outbound-traffic** statement at the **[edit class-of-service]** hierarchy level:

```
[edit class-of-service]
host-outbound-traffic {
  forwarding-class class-name;
  dscp-code-point code-point;
}
```

For example, to map host outbound traffic to queue 7 (the network control forwarding class) and set the DSCP code point value to 101010:

```
[edit class-of-service]
host-outbound-traffic {
  forwarding-class network-control;
  dscp-code-point 101010
}
```

### Related Documentation

- [Understanding Host Routing Engine Outbound Traffic Queues and Defaults on page 4842](#)

## Defining CoS Traffic Control Profiles (Priority Group Scheduling)

A traffic control profile defines the output bandwidth and scheduling characteristics of forwarding class sets (priority groups). The forwarding classes (queues) contained in a forwarding class set share the bandwidth resources that you configure in the traffic control profile. A scheduler map associates forwarding classes with schedulers to define how the individual queues in a forwarding class set share the bandwidth allocated to that forwarding class set.

The parameters you configure in a traffic control profile define the following characteristics for the priority group:



- **guaranteed-rate**—Minimum bandwidth, also known as the committed information rate (CIR). The guaranteed rate also determines the amount of excess (extra) port bandwidth that the priority group can share. Extra port bandwidth is allocated among the priority groups on a port in proportion to the guaranteed rate of each priority group.



**NOTE:** You cannot configure a guaranteed rate for a forwarding class set (priority group) that includes strict-high priority queues. If the traffic control profile is for a forwarding class set that contains strict-high priority queues, do not configure a guaranteed rate.

- **shaping-rate**—Maximum bandwidth, also known as the peak information rate (PIR).
- **scheduler-map**—Bandwidth and scheduling characteristics for the queues, defined by mapping forwarding classes to schedulers. (The queue scheduling characteristics represent amounts or percentages of the priority group bandwidth, not the amounts or percentages of total link bandwidth.)



**NOTE:** Because a port can have more than one priority group, when you assign resources to a priority group, keep in mind that the total port bandwidth must serve all of the queues associated with that port.

To configure a traffic control profile using the CLI:

1. Name the traffic control profile and define the minimum guaranteed bandwidth for the priority group:

```
[edit class-of-service ]
user@switch# set traffic-control-profiles traffic-control-profile-name guaranteed-rate (rate
| percent percentage)
```

2. Define the maximum bandwidth for the priority group:

```
[edit class-of-service traffic-control-profiles traffic-control-profile-name]
user@switch# set shaping-rate (rate | percent percentage)
```

3. Attach a scheduler map to the traffic control profile:

```
[edit class-of-service traffic-control-profiles traffic-control-profile-name]
user@switch# set scheduler-map scheduler-map-name
```

#### Related Documentation

- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)
- [Example: Configuring Minimum Guaranteed Output Bandwidth on page 5040](#)
- [Example: Configuring Maximum Output Bandwidth on page 5044](#)
- [Defining CoS Queue Schedulers on page 5139](#)
- [Understanding CoS Traffic Control Profiles on page 4886](#)



## Configuring CoS PFC (Congestion Notification Profiles)

A congestion notification profile (CNP) enables priority-based flow control (PFC) on specified IEEE 802.1p priorities (code points). A CNP has two components:

- Input CNP:
  - Enable PFC on a specified priority.
  - Configure the maximum receive unit (MRU) on an interface for traffic that matches the PFC priority (optional).
  - Specify the length of the attached cable on the ingress interface (optional)
- Output CNP (optional): Configure flow control to enable PFC pause on specific output queues for specified priorities.



**NOTE:** By default, output queues 3 and 4 (which are mapped to default lossless forwarding classes `fcoe` and `no-loss`, respectively) are configured to respond to PFC pause messages received from the connected peer on priorities 3 and 4 (code points 011 and 100, respectively). If you explicitly configure flow control on any output queue, you must configure flow control on every output queue that you want to respond to pause messages. (The explicit configuration overrides the default configuration.)

To achieve lossless behavior, the output queue priorities on which you enable PFC flow control must match the PFC priorities on which you enable PFC on the input interfaces. For example, if you program output queues to pause priorities 3 (011) and 5 (101) in the output component of the CNP, then you must also enable pause on priorities 3 and 5 on the input component of the CNP. (In addition, the forwarding classes mapped to the paused output queues must be lossless forwarding classes.)

Associating a CNP with an interface enables PFC on the ingress traffic that matches the priority specified in the input CNP, and programs the queues listed in the output CNP to pause when the interface receives a PFC pause message from the connected peer. Configure PFC on a priority end to end along the entire data path to create a lossless lane of traffic on the network.





**NOTE:** You must enable PFC on the priority used by FCoE traffic on ingress interfaces (input CNP). Enable PFC on the FCoE priority on every interface that carries FCoE traffic. By convention, FCoE traffic uses priority 3 (code point 011), which maps to queue 3. If your network uses priority 3 for FCoE traffic, the default forwarding class and classifier configuration support lossless transport, but you must still configure a CNP and apply it to the correct ingress interfaces to enable PFC and achieve lossless transport.

If your network does not use priority 3 for FCoE traffic, you need to configure a classifier that classifies FCoE traffic into a lossless forwarding class, based on the priority your network uses for FCoE traffic. If you are not using the default lossless forwarding class configuration, then you also need to ensure that the output queue mapped to the lossless FCoE forwarding class is programmed to pause.

You can attach only one CNP to an interface. There is no limit to the total number of CNPs you can create.

Configuring a CNP consists of:

- Naming the CNP.
- Specifying the IEEE 802.1 code point (priority) on which you want to enable PFC on ingress interfaces (input CNP).
- Optionally, specifying the MRU and the length of the attached cable on ingress interfaces (input CNP).
- Optionally, configuring flow control (PFC pause) on specified output queues if you want queues other than queues 3 and 4 to respond to pause messages received from the connected peer (output CNP).
- Mapping the CNP to an interface.

1. Enable PFC on the desired priority in the input CNP and optionally configure the interface MRU for traffic on that priority:

```
[edit class-of-service]
user@switch# set congestion-notification-profile cnp-name input ieee-802.1 code-point
code-point bits pfc mru mru-value
```

For example, to configure a CNP named **fcoe-cnp** that enables PFC on IEEE 802.1 code point **011** and configures an MRU value of **2240**:

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe-cnp input ieee-802.1 code-point 011
pfc mru 2240
```

2. Configure the length of the cable attached to the ingress interface (optional):

```
[edit class-of-service]
user@switch# set congestion-notification-profile cnp-name input cable-length
cable-length-value
```



For example, to configure a CNP named **fcoe-cnp** that sets the length of the ingress interface cable to **100** meters:

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe-cnp input cable-length 100
```

3. (Optional) Configure flow control on output queues:

```
[edit class-of-service]
user@switch# set congestion-notification-profile cnp-name output ieee-802.1 code-point
code-point-bits flow-control-queue [queue | list-of-queues]
```

For example, to configure a CNP named **fcoe-cnp** that enables PFC pause flow control on output queues 3 and 5 for FCoE traffic that uses priority 3 (code point **011**) and on output queue 4 for traffic that uses priority 4 (code point **100**):

```
[edit class-of-service]
user@switch# set congestion-notification-profile cnp-name output ieee-802.1 code-point
011 flow-control-queue [3 5]
user@switch# set congestion-notification-profile cnp-name output ieee-802.1 code-point
100 flow-control-queue 4
```

4. Map the CNP to an interface:

```
[edit class-of-service]
user@switch# set interfaces interface congestion-notification-profile cnp-name
```

For example, to map the CNP **fcoe-cnp** to the interface **xe-0/0/7**:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/7 congestion-notification-profile fcoe-cnp
```

**Related  
Documentation**

- [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)
- [Example: Configuring IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 5094](#)
- [Assigning CoS Components to Interfaces on page 5157](#)
- [Monitoring Interfaces That Have CoS Components on page 5267](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)
- [Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896](#)



## Enabling and Disabling CoS Symmetric Ethernet PAUSE Flow Control

Ethernet PAUSE flow control is a congestion relief feature that works by providing link-level flow control for all traffic on a full-duplex Ethernet link, including Ethernet links that belong to Ethernet link aggregated (LAG) interfaces. Ethernet PAUSE works in both directions on the link. In one direction, an interface generates and sends PAUSE messages to stop the connected peer from sending more traffic. In the other direction, the interface responds to PAUSE messages it receives from the connected peer to stop sending traffic.

Symmetric flow control means that an interface has the same PAUSE configuration in both directions. The PAUSE generation and PAUSE response functions are both configured as enabled, or they are both disabled.

Asymmetric flow control allows you to configure the PAUSE functionality in each direction independently on an interface. The configuration for generating PAUSE messages and for responding to PAUSE messages does not have to be the same. It can be enabled in both directions, disabled in both directions, or enabled in one direction and disabled in the other direction. If you do not want to PAUSE all of the traffic on a link, you can use priority-based flow control (PFC) to selectively pause traffic based on its IEEE 802.1p code point.

On any particular interface, symmetric and asymmetric flow control are mutually exclusive. If you attempt to configure both features, the switch returns a commit error. Ethernet PAUSE and PFC are also mutually exclusive features, so you cannot configure both of them on the same interface. If you attempt to configure both Ethernet PAUSE and PFC on an interface, the switch returns a commit error.

By default, all flow control features are disabled. You enable symmetric flow control on the interfaces on which you want to PAUSE all of the traffic on a link.

- To enable symmetric flow control on an interface:

```
[edit interfaces interface-name ether-options]  
user@switch# set flow-control
```

- To disable symmetric flow control on an interface:

```
[edit interfaces interface-name ether-options]  
user@switch# set no-flow-control
```

### Related Documentation

- [Configuring CoS Asymmetric Ethernet PAUSE Flow Control on page 5149](#)
- [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)



## Configuring CoS Asymmetric Ethernet PAUSE Flow Control

Ethernet PAUSE flow control is a congestion relief feature that works by providing link-level flow control for all traffic on a full-duplex Ethernet link, including Ethernet links that belong to link aggregated (LAG) interfaces. Ethernet PAUSE works in both directions on the link. In one direction, an interface generates and sends PAUSE messages to stop the connected peer from sending more traffic. In the other direction, the interface responds to PAUSE messages it receives from the connected peer to stop sending traffic.

Asymmetric flow control allows you to configure the PAUSE functionality in each direction independently on an interface. The configuration for generating PAUSE messages and for responding to PAUSE messages does not have to be the same. It can be enabled in both directions, disabled in both directions, or enabled in one direction and disabled in the other direction.

Symmetric flow control means that the interface has the same configuration in both directions. The PAUSE generation and PAUSE response functions are both configured as enabled or they are both disabled. If you do not want to PAUSE all of the traffic on a link, you can use priority-based flow control (PFC) to selectively pause traffic based on its IEEE 802.1p code point.

Asymmetric flow control provides the ability to configure the receive buffer and transmit buffer Ethernet PAUSE actions independently on an interface. The buffers perform the following actions:

- The receive buffers generate and send PAUSE messages to the connected peer to ask the peer to stop sending traffic for a time period specified in the PAUSE frame. The peer interface's buffers may store outgoing frames until the PAUSE period elapses and the interface can resume sending traffic.
- The transmit buffers respond to PAUSE messages received from the connected peer to stop sending traffic to the peer. The transmit buffer may store outgoing frames until the PAUSE period elapses and the interface can resume sending traffic.

Asymmetric flow control enables you to specify independently whether or not the interface receive buffer generates and sends PAUSE messages to stop the connected peer from transmitting traffic, and whether or not the interface transmit buffer responds to PAUSE messages it receives from the connected peer and stops transmitting traffic. The receive buffer configuration determines if the interface transmits PAUSE messages, and the transmit buffer configuration determines if the interface receives and responds to PAUSE messages:

- Receive buffers on—Enable PAUSE transmission (generate and send PAUSE frames)
- Transmit buffers on—Enable PAUSE reception (respond to received PAUSE frames)

You must explicitly set both the receive buffer and the transmit buffer to configure asymmetric flow control.

- To configure asymmetric flow control on an interface:  
[edit **interfaces** *interface-name* **ether-options**]



```
user@switch# set configured-flow-control rx-buffers (on | off) tx-buffers (on | off)
```

For example, to configure interface **xe-0/0/24** to generate and send PAUSE messages but not to respond to received PAUSE messages:

```
set interfaces xe-0/0/24 ether-options configured-flow-control rx-buffers on tx-buffers off
```

For example, to configure interface **xe-0/0/30** to respond to received PAUSE messages but not to generate and send PAUSE messages:

```
set interfaces xe-0/0/30 ether-options configured-flow-control rx-buffers off tx-buffers on
```



**NOTE:** If you configure both buffers to be on, that is equivalent to symmetric flow control. If you configure both buffers to be off, there is no flow control (flow control is disabled).

---

**Related  
Documentation**

- [Enabling and Disabling CoS Symmetric Ethernet PAUSE Flow Control on page 5148](#)
- [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)



## Configuring CoS Fixed Classifier Rewrite Values for Native FC Interfaces (NP\_Ports)

Fibre Channel over Ethernet (FCoE) traffic typically uses IEEE 802.1p priority 3 (code point 011). When Fibre Channel (FC) traffic arrives on a native FC interface (NP\_Port) on an FCoE-FC gateway, the interface encapsulates the FC traffic in Ethernet to create FCoE frames. By default, the native FC interface assigns priority 3 to the FCoE traffic. The traffic is then forwarded internally to the gateway Ethernet interfaces, and then forwarded to the FCoE network.

If your FCoE network uses priority 3 for FCoE traffic, you do not need to use a rewrite value to remap the FCoE priority on native FC interfaces, because the default configuration maps priority 3 to the FCoE forwarding class.

However, if the FCoE network uses a different priority than priority 3 for FCoE traffic, then you can configure a rewrite value to remap incoming traffic from the FC SAN to that priority after the interface encapsulates the FC packets in Ethernet. Setting a rewrite value for the IEEE 802.1p code point (priority) configures the gateway native FC interface to assign the rewrite value to the encapsulated FCoE frames before forwarding the FCoE frames to the gateway Ethernet interface. Instead of a priority of 3, the FCoE frames use the priority specified in the rewrite value.

Traffic coming from the FC SAN is classified into a lossless forwarding class, and that lossless forwarding class is mapped to the rewrite value (the priority used for FCoE traffic on the converged Ethernet network). You specify the lossless forwarding class used for FCoE traffic on a native FC interface by configuring a fixed classifier and applying it to the native FC interface. (The same forwarding class must also be mapped to the rewrite value priority in the ingress classifier applied to the FCoE Ethernet interfaces.) All traffic received from the FC SAN on that FC interface is encapsulated in Ethernet, classified into the forwarding class specified in the fixed classifier, and assigned the rewrite value priority.

Configuring a rewrite value consists of:

- Configuring a fixed classifier on the native FC interface. The fixed classifier assigns all the traffic that arrives at the interface from the connected peer in the FC SAN to one fixed forwarding class. The forwarding class must be a lossless forwarding class and must be classified to the rewrite value priority in the ingress classifier configuration on the FCoE Ethernet interfaces.
- Specifying an IEEE 802.1p rewrite value for the native FC interface. The traffic mapped to the forwarding class in the fixed classifier is marked with the priority you specify in the rewrite value when the traffic is encapsulated in Ethernet. The rewrite value must be the IEEE 802.1p priority used for FCoE traffic in your converged Ethernet network.

You can configure one rewrite value per native FC interface. Each native FC interface can use a different rewrite value.

1. Configure a fixed classifier on the native FC interface:

```
[edit class-of-service]
user@switch# set interfaces fc-interface-name forwarding-class
lossless-forwarding-class-name
```



For example, to configure a fixed classifier on native FC interface **fc-0/0/2** that specifies the lossless forwarding class **fcoe1**:

```
[edit class-of-service]
user@switch# set interfaces fc-0/0/2 forwarding-class fcoe1
```

2. Configure a rewrite value for the traffic classified into the fixed classifier (this must be the IEEE 802.1p priority used for the traffic on your converged Ethernet network):

```
[edit class-of-service]
user@switch# set interfaces fc-interface-name rewrite-value input ieee-802.1 code-point
code-point-bits
```

For example, to configure a rewrite value on native FC interface **fc-0/0/2** that specifies an IEEE 802.1p priority of **101** (the lossless forwarding class specified in the fixed classifier must be classified to this priority in the ingress classifier configuration on the FCoE Ethernet interfaces):

```
[edit class-of-service]
user@switch# set interfaces fc-0/0/2 rewrite-value input ieee-802.1 code-point 101
```

In the example, all traffic from the FC SAN that arrives at FCoE-FC gateway interface **fc-0/0/2** is encapsulated in Ethernet, classified into the lossless **fcoe1** forwarding class, and tagged with the IEEE 802.1p priority 5 (code point 101). In this example, we assume that the converged Ethernet network uses priority 5 for FCoE traffic, and that the **fcoe1** forwarding class is mapped to priority 5 in the ingress classifier configuration on the Ethernet interfaces. To achieve lossless transport, you must also enable PFC on priority 5 on the Ethernet interfaces that connect the FCoE traffic to the Ethernet network.

**Related  
Documentation**

- [Example: Configuring IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 5094](#)
- [Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 4911](#)



## Configuring Global Ingress and Egress Shared Buffers

Although the switch reserves some buffer space to ensure a minimum memory allocation for ports and queues, you can configure how the system uses the rest of the buffer space to optimize the buffer allocation for your particular mix of network traffic. The global shared buffer pool is memory space that all of the ports on the switch share dynamically as they need buffers. You can allocate global shared memory space to different types of ingress and egress buffers to better support different mixes of network traffic.



**CAUTION:** Changing the buffer configuration is a disruptive event. Traffic stops on *all* ports until buffer reprogramming is complete.

Use the default shared buffer settings (for a network with a balanced mix of lossless, best-effort, and multicast traffic) or one of the recommended shared buffer configurations for your mix of network traffic (mostly best-effort unicast traffic, mostly multicast traffic, or mostly lossless traffic). Either the default configuration or one of the recommended configurations provides a buffer allocation that satisfies the needs of most networks.

After starting from one of the recommended configurations, you can fine-tune the shared buffer settings, but do so with caution to prevent traffic loss due to buffer misconfiguration.

You can configure the percentage of available (user-configurable) buffer space allocated to the global shared buffers. Any space that you do not allocate to the global shared buffer pool is added to the dedicated buffer pool. The default configuration allocates 100 percent of the available buffer space to the global shared buffers.

You can partition the ingress and egress shared buffer pools to allocate more buffers to the types of traffic your network predominantly carries, and fewer buffers to other traffic. From the buffer space allocated to the ingress shared buffer pool, you can allocate space to:

- **Lossless buffers**—Percentage of shared buffer pool for all lossless ingress traffic. The minimum value for the lossless buffers is 5 percent.
- **Lossless headroom buffers**—Percentage of shared buffer pool for packets received while a pause is asserted. If Ethernet PAUSE is configured on a port or if priority-based flow control (PFC) is configured on priorities on a port, when the port sends a pause message to the connected peer, the port uses the headroom buffers to store the packets that arrive between the time the port sends the pause message and the time the last packet arrives after the peer pauses traffic. The minimum value for the lossless headroom buffers is 0 (zero) percent. (Lossless headroom buffers are the only buffers that can have a minimum value of less than 5 percent.)
- **Lossy buffers**—Percentage of shared buffer pool for all best-effort ingress traffic (best-effort unicast, multidestination, and strict-high priority traffic). The minimum value for the lossy buffers is 5 percent.

The combined percentage values of the ingress lossless, lossless headroom, and lossy buffer partitions must total exactly 100 percent. If the buffer percentages total more than 100 percent or less than 100 percent, the switch returns a commit error. All ingress



buffer partitions must be explicitly configured, even when the lossless headroom buffer partition has a value of 0 (zero) percent.

From the buffer space allocated to the egress shared buffer pool, you can allocate space to:

- Lossless buffers—Percentage of shared buffer pool for all lossless egress queues. The minimum value for the lossless buffers is 5 percent.
- Lossy buffers—Percentage of shared buffer pool for all best-effort egress queues (best-effort unicast, and strict-high priority queues). The minimum value for the lossy buffers is 5 percent.
- Multicast buffers—Percentage of shared buffer pool for all multdestination (multicast, broadcast, and destination lookup fail) egress queues. The minimum value for the multicast buffers is 5 percent.

The combined percentage values of the egress lossless, lossy, and multicast buffer partitions must total exactly 100 percent. If the buffer percentages total more than 100 percent or less than 100 percent, the switch returns a commit error. All egress buffer partitions must be explicitly configured and must have a value of at least 5 percent.

To configure the shared buffer allocation and partitioning using the CLI:

1. Configure the percentage of available (nonreserved) buffers used for the ingress global shared buffer pool:

```
[edit class-of-service shared-buffer]
user@switch# set ingress percent percent
```

2. Configure the global ingress buffer partitions for lossless, lossless-headroom, and lossy traffic:

```
[edit class-of-service shared-buffer]
user@switch# set ingress buffer-partition lossless percent percent
user@switch# set ingress buffer-partition lossless-headroom percent percent
user@switch# set ingress buffer-partition lossy percent percent
```

3. Configure the percentage of available (nonreserved) buffers used for the egress global shared buffer pool:

```
[edit class-of-service shared-buffer]
user@switch# set egress percent percent
```

4. Configure the global egress buffer partitions for lossless, lossy, and multicast queues:

```
[edit class-of-service shared-buffer]
user@switch# set egress buffer-partition lossless percent percent
user@switch# set egress buffer-partition lossy percent percent
user@switch# set egress buffer-partition multicast percent percent
```

#### Related Documentation

- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Best-Effort Unicast Traffic on page 5103](#)
- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Multicast Traffic on page 5109](#)



- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Lossless Traffic on page 5114](#)
- [Understanding CoS Buffer Configuration on page 4914](#)

## Defining CoS Rewrite Rules

You configure rewrite rules to alter CoS values in outgoing packets on the outbound interfaces of a switch to match the policies of a targeted peer. Policy matching allows the downstream routing platform or switch in a neighboring network to classify each packet into the appropriate service group.

To configure a CoS rewrite rule, create the rule by giving it a name and associating it with a forwarding class, loss priority, and code point. This creates a rewrite table. After the rewrite rule is created, enable it on an interface. You can also apply an existing rewrite rule on an interface.



**NOTE:** On each physical interface, either all forwarding classes that are being used on the interface must have rewrite rules configured, or no forwarding classes that are being used on the interface can have rewrite rules configured. On any physical port, do not mix forwarding classes with rewrite rules and forwarding classes without rewrite rules.



**NOTE:** To replace an existing rewrite rule on the interface with a new rewrite rule of the same type, first explicitly remove the rewrite rule and then apply the new rule.



**NOTE:** For packets that carry both an inner VLAN tag and an outer VLAN tag, the rewrite rule rewrites only the outer VLAN tag.

To create rewrite rules and enable them on interfaces:

- To create an 802.1p rewrite rule named **customup-rw** in the rewrite table for all Layer 2 interfaces:

```
[edit class-of-service rewrite-rules]
user@switch# set ieee-802.1 customup-rw forwarding-class be loss-priority low code-point 000
user@switch# set ieee-802.1 customup-rw forwarding-class be loss-priority high code-point 001
user@switch# set ieee-802.1 customup-rw forwarding-class be loss-priority low code-point 010
user@switch# set ieee-802.1 customup-rw forwarding-class fcoe loss-priority low code-point 011
user@switch# set ieee-802.1 customup-rw forwarding-class ef-no-loss loss-priority low code-point 100
user@switch# set ieee-802.1 customup-rw forwarding-class ef-no-loss loss-priority high code-point 101
```



```
user@switch# set ieee-802.1 customup-rw forwarding-class nc loss-priority low code-point 110
user@switch# set ieee-802.1 customup-rw forwarding-class nc loss-priority high code-point 111
```

- To enable an 802.1p rewrite rule named **customup-rw** on a Layer 2 interface:

```
[edit]
user@switch# set class-of-service interfaces xe-0/0/7 unit 0 rewrite-rules ieee-802.1
customup-rw
```



**NOTE:** All forwarding classes assigned to port xe-0/0/7 must have rewrite rules. Do not mix forwarding classes that have rewrite rules with forwarding classes that do not have rewrite rules on the same physical interface.

- To enable an 802.1p rewrite rule named **customup-rw** on all 10-Gigabit Ethernet interfaces on the switch, use wildcards for the interface name and logical interface (unit) number:

```
[edit]
user@switch# set class-of-service interfaces xe-* unit * rewrite-rules customup-rw
```



**NOTE:** In this case, *all* forwarding classes assigned to *all* 10-Gigabit Ethernet ports must have rewrite rules. Do not mix forwarding classes that have rewrite rules with forwarding classes that do not have rewrite rules on the same physical interface.

#### Related Documentation

- [Monitoring CoS Rewrite Rules on page 5268](#)
- [Understanding CoS Rewrite Rules on page 4933](#)
- [Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces on page 4851](#)



## Assigning CoS Components to Interfaces

After you define the following CoS components, you assign them to physical or logical interfaces. Components that you assign to physical interfaces are valid for all of the logical interfaces configured on the physical interface. Components that you assign to a logical interface are valid only for that logical interface.

- Classifiers—Assign only to logical interfaces.
- Congestion notification profiles—Assign only to physical interfaces.
- Forwarding classes—Assign to interfaces by mapping to forwarding class sets.
- Forwarding class sets—Assign only to physical interfaces.
- Output traffic control profiles—Assign only to physical interfaces (with a forwarding class set).
- Rewrite rules—Assign only to logical interfaces.

You can assign a CoS component to a single interface or to multiple interfaces using wildcards. You can also assign a congestion notification profile or a forwarding class set globally to all interfaces.

To assign CoS components to interfaces:

Assign CoS components to a single interface by associating a CoS component (for example a forwarding class set named **san-priority-group**) with an interface:

```
[edit class-of-service interfaces]
user@switch# set xe-0/0/7 forwarding-class-set san-priority-group
```

Assign a CoS component to multiple interfaces by associating a CoS component (for example, a rewrite rule named **customup-rw**) to all 10-Gigabit Ethernet interfaces on the switch, use wildcard characters for the interface name and logical interface (unit) number:

```
[edit class-of-service interfaces]
user@switch# set xe-* unit * rewrite-rules ieee-802.1 customup-rw
```

Assign a congestion notification profile or a forwarding class set globally to all interfaces using the **set class-of-service interfaces all** statement. For example, to assign a forwarding class set named **be\_fcset** to all interfaces:

```
[edit class-of-service interfaces]
user@switch# set all forwarding-class-set be_fcset
```



**NOTE:** If there is an existing CoS configuration of any type on an interface, the global configuration is not applied to that particular interface. The global configuration is applied to all interfaces that do not have an existing CoS configuration.

For example, if you configure a rewrite rule, assign it to interfaces **xe-0/0/20.0** and **xe-0/0/22.0**, and then configure a congestion notification profile and apply it to all interfaces, the congestion notification profile is applied to every interface except **xe-0/0/20** and **xe-0/0/22**.



- Related Documentation**
- [Monitoring Interfaces That Have CoS Components on page 5267](#)
  - [Understanding Junos CoS Components on page 4827](#)
  - [Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces on page 4851](#)

## Configuring the DCBX Mode

You can configure the DCBX mode that an interface uses to communicate with the connected peer. QFX Systems support three DCBX modes:

- **Autonegotiation**—The interface negotiates with the connected peer to determine the DCBX mode. This is the default DCBX mode.
- **IEEE DCBX**—The interface uses IEEE DCBX type, length, and value (TLV) to exchange DCBX information with the connected peer. QFX3500 Node devices come up with IEEE DCBX enabled by default and then autonegotiate with the connected peer to determine the final DCBX mode.
- **DCBX Version 1.01**—The interface uses Converged Enhanced Ethernet (CEE) DCBX version 1.01 TLVs to exchange DCBX information with the connected peer. QFabric Node devices come up with DCBX version 1.01 enabled by default and then autonegotiate with the connected peer to determine the final DCBX mode.



**NOTE:** QFX Systems do not support pre-CEE (pre-DCB) versions of DCBX such as DCBX version 1.00. If a QFX Series interface receives an LLDP frame with pre-CEE DCBX TLVs, the system drops the frame.

Configure the DCBX mode by specifying the mode for one interface or for all interfaces.

- To configure the DCBX mode, specify the interface and the mode:

```
[edit protocols dcbx]  
user@switch# set interface interface-name mode (auto-negotiate | ieee-dcbx |  
dcbx-version-1.01)
```

For example, to configure DCBX version 1.01 on interface **xe-0/0/21**:

```
user@switch# set protocols dcbx interface xe-0/0/21 mode dcbx-version-1.01
```

To configure IEEE DCBX on all interfaces:

```
user@switch# set protocols dcbx interface all mode ieee-dcbx
```

- Related Documentation**
- [Configuring DCBX Autonegotiation on page 4601](#)
  - [Disabling the ETS Recommendation TLV on page 4604](#)
  - [Understanding DCBX on page 4463](#)
  - [Understanding DCBX Application Protocol TLV Exchange on page 4472](#)
  - [show dcbx neighbors on page 4694](#)



## Configuring DCBX Autonegotiation

Data Center Bridging Capability Exchange protocol (DCBX) discovers the data center bridging (DCB) capabilities of peers by exchanging feature configuration information. DCBX also detects feature misconfiguration and mismatches, and can configure DCB on peers. DCBX is an extension of the Link Layer Discovery Protocol (LLDP), and LLDP must remain enabled on every interface for which you want to use DCBX. If you attempt to enable DCBX on an interface on which LLDP is disabled, the configuration commit operation fails.



**NOTE:** LLDP and DCBX are enabled by default on all interfaces.

The switch supports DCBX autonegotiation for:

- Priority-based flow control (PFC) configuration
- Layer 2 and Layer 4 applications such as Fibre Channel over Ethernet (FCoE) and Internet Small Computer System Interface (iSCSI)
- Enhanced transmission selection (ETS) advertisement

DCBX autonegotiation is configured on a per-interface basis for each supported feature or application. The PFC and application DCBX exchanges use autonegotiation by default. The default autonegotiation behavior is:

- DCBX is enabled on the interface if the connected peer device also supports DCBX.
- DCBX is disabled on the interface if the connected peer device does not support DCBX.

You can override the default behavior for each feature by turning off autonegotiation to force an interface to enable or disable the feature.

Autonegotiation of ETS means that when ETS is enabled on an interface (priority groups are configured), the interface advertises its ETS configuration to the peer device. In this case, priorities (forwarding classes) that are not part of a priority group (forwarding class set) receive no bandwidth and are advertised in an automatically generated default forwarding class. If ETS is not enabled on an interface (no priority groups are configured), all of the priorities are advertised in one automatically generated default priority group that receives 100 percent of the port bandwidth.

Disabling ETS autonegotiation prevents the interface from sending the Recommendation TLV or the Configuration TLV to the connected peer.

On interfaces that use IEEE DCBX mode to exchange DCBX parameters, you can disable autonegotiation of the enhanced transmission selection (ETS) Recommendation TLV to the peer if you want an asymmetric ETS configuration between the peers. DCBX still exchanges the ETS Configuration TLV if you disable the ETS Recommendation TLV.

Autonegotiation of PFC means that when PFC is enabled on an interface, if the peer device connected to the interface supports PFC and is provisioned compatibly with the switch, DCBX sets the PFC operational state to enabled. If the peer device connected to



the interface does not support PFC or is not provisioned compatibly with the switch, DCBX sets the operational state to disabled.

In addition, if the peer advertises that it is “willing” to learn its PFC configuration from the switch, DCBX pushes the switch’s PFC configuration to the peer and does not check the peer’s administrative state. The switch does not learn PFC configuration from peers (the switch does not advertise its state as “willing”).

Disabling PFC autonegotiation prevents the interface from exchanging PFC configuration information with the peer. It forces the interface to enable PFC if PFC is configured on the interface or to disable PFC if PFC is not configured on the interface. If you disable PFC autonegotiation, the assumption is that the peer is also configured manually.

Autonegotiation of applications depends on whether or not you apply an application map to an interface. If you apply an application map to an interface, the interface autonegotiates DCBX for each application in the application map. PFC must be enabled on the FCoE priority (the FCoE IEEE 802.1p code point) for the interface to advertise the FCoE application. The interface only advertises applications that are included in the application map.

For example, if you apply an application map to an interface and the application map does not include the FCoE application, then that interface does not perform DCBX advertisement of FCoE.

If you do not apply an application map to an interface, DCBX does not advertise applications on that interface, with the exception of FCoE, which is handled differently than other applications.



**NOTE:** If you do not apply an application map to an interface, the interface performs autonegotiation of FCoE if the interface carries traffic in the FCoE forwarding class and also has PFC enabled on the FCoE priority. On such interfaces, if DCBX detects that the peer device connected to the interface supports FCoE, the switch advertises its FCoE capability and IEEE 802.1p code point on that interface. If DCBX detects that the peer device connected to the interface does not support FCoE, DCBX marks that interface as “FCoE down” and disables FCoE on the interface.

---

When DCBX marks an interface as “FCoE down,” the behavior of the switch depends on how you use it in the network:

- When the switch acts as an FCoE-FC gateway, it does not send or receive FCoE Initialization Protocol (FIP) packets.
- When the switch acts as an FCoE transit switch, the interface drops all of the FIP packets it receives. In addition, FIP packets received from an FCoE forwarder (FCF) are not forwarded to interfaces marked as “FCoE down.”

Disabling autonegotiation prevents the interface from exchanging application information with the peer. In this case, the assumption is that the peer is also configured manually.



To disable DCBX autonegotiation of PFC, applications (including FCoE), and ETS using the CLI:

1. Turn off autonegotiation for PFC.

```
[edit]
user@switch# set protocols dcbx interface interface-name priority-flow-control
no-auto-negotiation
```

2. Turn off autonegotiation for applications.

```
[edit]
user@switch# set protocols dcbx interface interface-name applications no-auto-negotiation
```

3. Turn off autonegotiation for ETS.

```
[edit]
user@switch# set protocols dcbx interface interface-name enhanced-transmission-selection
no-auto-negotiation
```

To disable autonegotiation of the ETS Recommendation TLV so that DCBX exchanges only the ETS Configuration TLV:

- [edit protocols dcbx interface *interface-name*]  
user@switch# set enhanced-transmission-selection recommendation-tlv no-auto-negotiate

#### Related Documentation

- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)
- [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)
- [Disabling the ETS Recommendation TLV on page 4604](#)
- [Understanding DCBX Application Protocol TLV Exchange on page 4472](#)
- [Using DCBX Protocol to Lower Costs](#)



## Disabling the ETS Recommendation TLV

The enhanced transmission selection (ETS) Recommendation TLV communicates the ETS settings that the switch wants the connected peer interface to use. If the peer interface is “willing,” the peer interface changes its configuration to match the configuration in the ETS Recommendation TLV. By default, the switch interfaces send the ETS Recommendation TLV to the peer. The settings communicated are the egress ETS settings defined by configuring hierarchical scheduling on the interface.

We recommend that you use the same ETS settings on the connected peer that you use on the switch interface and that you leave the ETS Recommendation TLV enabled. However, on interfaces that use IEEE DCBX as the DCBX mode, if you want an asymmetric configuration between the switch interface and the connected peer, you can disable the ETS Recommendation TLV.



**NOTE:** Disabling the ETS Recommendation TLV on interfaces that use DCBX version 1.01 as the DCBX mode has no effect and does not change DCBX behavior.

If you disable the ETS Recommendation TLV, the switch still sends the ETS Configuration TLV to the connected peer. The result is that the connected peer is informed about the switch DCBX ETS configuration, but even if the peer is “willing,” the peer does not change its configuration to match the switch configuration. This is asymmetric configuration—the two interfaces can have different parameter values for the ETS attribute.

To disable the ETS Recommendation TLV:

- [edit protocols dcbx interface *interface-name*]  
user@switch# **set enhanced-transmission-selection recommendation-tlv no-auto-negotiate**

### Related Documentation

- [Configuring the DCBX Mode on page 4600](#)
- [Configuring DCBX Autonegotiation on page 4601](#)
- [Understanding DCBX on page 4463](#)
- [Understanding Data Center Bridging Capability Exchange Protocol for EX Series Switches](#)

## Defining an Application for DCBX Application Protocol TLV Exchange

Define each application for which you want DCBX to exchange application protocol information. You can define Layer 2 and Layer 4 applications. After you define applications, you map them to IEEE 802.1p code points, and then apply the application map to the interfaces on which you want DCBX to exchange application protocol information with connected peers. (See *Related Documentation* for how to configure application maps and apply them to interfaces, and for an example of the entire procedure that also includes classifier configuration.)





**NOTE:** In Junos OS Release 12.1, the FCoE application was configured by default, so you did not need to configure it in an application map. In Junos OS Release 12.2, if you want DCBX to advertise the FCoE application on an interface and you apply an application map to that interface, you must explicitly configure FCoE in the application map. You also must enable priority-based flow control (PFC) on the FCoE code point on all interfaces that you want to advertise FCoE. If you apply an application map to an interface, the interface sends DCBX TLVs only for the applications configured in the application map.

Define Layer 2 applications by mapping an application name to an EtherType. Define Layer 4 applications by mapping an application name to a protocol (TCP or UDP) and a destination port.

- To define a Layer 2 application, specify the name of the application and its EtherType:

```
[edit applications]
user@switch# set application application-name ether-type ether-type
```

For example, to configure an application named **PTP** (for Precision Time Protocol) that uses the EtherType **0x88F7**:

```
user@switch# set applications application ptp ether-type 0x88F7
```

- To define a Layer 4 application, specify the name of the application, its protocol (TCP or UDP), and its destination port:

```
[edit]
user@switch# set applications application application-name protocol (tcp | udp)
destination-port port-value
```

For example, to configure an application named **iscsi** (for Internet Small Computer System Interface) that uses the protocol **TCP** and the destination port **3260**:

```
user@switch# set applications application iscsi protocol tcp destination-port 3260
```

#### Related Documentation

- [Configuring an Application Map for DCBX Application Protocol TLV Exchange on page 4606](#)
- [Applying an Application Map to an Interface for DCBX Application Protocol TLV Exchange on page 4607](#)
- [Configuring DCBX Autonegotiation on page 4601](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)
- [Example: Configuring DCBX to Support an iSCSI Application](#)
- [Understanding DCBX Application Protocol TLV Exchange on page 4472](#)
- [show dcbx neighbors on page 4694](#)



## Configuring an Application Map for DCBX Application Protocol TLV Exchange

After you define applications for which you want to exchange DCBX application protocol information, map the applications to IEEE 802.1p code points. The IEEE 802.1p code points identify incoming traffic and allow you to map that traffic to the desired application. You then apply the application map to the interfaces on which you want DCBX to exchange application protocol information with connected peers. (See *Related Documentation* for how to define applications and apply the application map to interfaces, and for an example of the entire procedure that also includes classifier configuration.)



**NOTE:** In Junos OS Release 12.1, the FCoE application was configured by default, so you did not need to configure it in an application map. In Junos OS Release 12.2, if you want DCBX to advertise the FCoE application on an interface and you apply an application map to that interface, you must explicitly configure FCoE in the application map. You also must enable priority-based flow control (PFC) on the FCoE code point on all interfaces that you want to advertise FCoE. If you apply an application map to an interface, the interface sends DCBX TLVs only for the applications configured in the application map.

Configure an application map by creating an application map name and mapping an application to one or more IEEE 802.1p code points.

- To define an application map, specify the name of the application map, the name of the application, and the IEEE 802.1p code points of the incoming traffic that you want to associate with the application in the application map:

```
[edit policy-options]
user@switch# set application-maps application-map-name application application-name
code-points [ aliases ] [ bit-patterns ]
```

For example, to configure an application map named **ptp-app-map** that includes an application named **PTP** (for Precision Time Protocol) and map the application to IEEE 802.1p code points **001** and **101**:

```
user@switch# set policy-options application-maps ptp-app-map application ptp code points
[ 001 101 ]
```

### Related Documentation

- [Defining an Application for DCBX Application Protocol TLV Exchange on page 4604](#)
- [Applying an Application Map to an Interface for DCBX Application Protocol TLV Exchange on page 4607](#)
- [Configuring DCBX Autonegotiation on page 4601](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)
- [Example: Configuring DCBX to Support an iSCSI Application](#)
- [show dcbx neighbors on page 4694](#)



## Applying an Application Map to an Interface for DCBX Application Protocol TLV Exchange

After you define applications and map them to IEEE 802.1p code points in an application map, apply the application map to the interfaces on which you want DCBX to exchange the application protocol information with connected peers. (See *Related Documentation* for how to define applications and configure application maps to interfaces, and for an example of the entire procedure that also includes classifier configuration.)



**NOTE:** In Junos OS Release 12.1, the FCoE application was configured by default, so you did not need to configure it in an application map. In Junos OS Release 12.2, if you want DCBX to advertise the FCoE application on an interface and you apply an application map to that interface, you must explicitly configure FCoE in the application map. You also must enable priority-based flow control (PFC) on the FCoE code point on all interfaces that you want to advertise FCoE. If you apply an application map to an interface, the interface sends DCBX TLVs only for the applications configured in the application map.

- To apply an application map to a DCBX interface, specify the DCBX interface and the application map name:

```
[edit protocols]
```

```
user@switch# set dcbx interface interface-name application-map application-map-name
```

For example, to apply an application map named **ptp-app-map** on interface **xe-0/0/11**:

```
user@switch# set protocols dcbx interface xe-0/0/11 application-map ptp-app-map
```

### Related Documentation

- [Defining an Application for DCBX Application Protocol TLV Exchange on page 4604](#)
- [Configuring an Application Map for DCBX Application Protocol TLV Exchange on page 4606](#)
- [Configuring DCBX Autonegotiation on page 4601](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)
- [Example: Configuring DCBX to Support an iSCSI Application](#)
- [show dcbx neighbors on page 4694](#)



## Configuration Statements

---

### application (Application Maps)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>application <i>application-name</i> {<br/>    <i>code-points</i> [ <i>aliases</i> ] [ <i>bit-patterns</i> ];<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit policy-options <b>application-maps</b> <i>application-map-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.1 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Add an application to an application map and define the application's code points.                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <i>application-name</i> —Name of the application.<br><br>The remaining statement is explained separately.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring an Application Map for DCBX Application Protocol TLV Exchange on page 4606</a></li><li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li><li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li></ul> |



## application (Applications)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> application <i>application-name</i> {     <i>destination-port</i> <i>port-value</i>;     <i>protocol</i> (tcp   udp);     <i>ether-type</i> <i>type</i>; } </pre>                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit applications]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.1 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Configure properties to define an application.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                  | <p><i>application-name</i>—Name of the application.</p> <p>The statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Defining an Application for DCBX Application Protocol TLV Exchange on page 4604</a></li> <li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li> <li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li> <li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li> <li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li> </ul> |



## application-map

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>application-map <i>application-map-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit <a href="#">protocols dcbx interface interface-name</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.1 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Specify an application map to apply to an interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>                  | <i>application-map-name</i> —Name of the application map.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show dcbx neighbors on page 4694</a></li><li>• <a href="#">Applying an Application Map to an Interface for DCBX Application Protocol TLV Exchange on page 4607</a></li><li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li><li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li></ul> |



## application-maps

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> application-maps <i>application-map-name</i> {   application <i>application-name</i> {     code-points [ <i>aliases</i> ] [ <i>bit-patterns</i> ];   } } </pre>                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit policy-options]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 12.1 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | Define an application map by specifying the applications that belong to the application map.                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <p><b><i>application-map-name</i></b>—Name of the application map.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring an Application Map for DCBX Application Protocol TLV Exchange on page 4606</a></li> <li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li> <li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li> <li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li> <li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li> </ul> |



## applications (Applications)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>applications {<br/>  application application-name {<br/>    destination-port port-value;<br/>    protocol (tcp   udp);<br/>    ether-type type;<br/>  }<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.1 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Define applications that DCBX advertises.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | The statements are explained separately.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Defining an Application for DCBX Application Protocol TLV Exchange on page 4604</a></li><li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li><li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li></ul> |



---

## applications (DCBX)

---

|                                 |                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>applications {<br/>    no-auto-negotiation;<br/>}</pre>                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit <a href="#">protocols dcbx interface interface-name</a> ]                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>Statement introduced in Junos OS Release 12.1 for the EX Series                                                  |
| <b>Description</b>              | Configure Data Center Bridging Capability Exchange protocol (DCBX) applications on an interface.                                                                                      |
| <b>Options</b>                  | The remaining statements are explained separately.                                                                                                                                    |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show dcbx neighbors on page 4694</a></li><li>• <a href="#">Understanding DCB Features and Requirements on page 4389</a></li></ul> |



## buffer-partition (Egress)

**Syntax** `buffer-partition (lossless | lossy | multicast) {  
percent percent;  
}`

**Hierarchy Level** [edit [class-of-service shared-buffer egress](#)]

**Release Information** Statement introduced in Junos OS Release 12.3 for the QFX Series.

**Description** The egress shared buffer pool is divided into three partitions. Each partition reserves a percentage of the available shared buffer pool for a type of traffic, so that the switch provides enough resources to support a mix of best-effort, lossless, and multicast traffic (multicast also includes broadcast and destination lookup fail traffic). To better support the mix of traffic on your network, you can optimize the allocation of egress shared buffers to different types of traffic by fine-tuning the shared buffer partitions.

The percentages you configure for the three egress shared buffer partitions must total exactly 100 percent. If the total of the three shared buffer percentages is not 100 percent, the system returns a commit error and does not commit the configuration. You can configure any partition to 0 (zero) percent as long as the allocation to other partitions totals 100 percent.

This is a global allocation that applies to all ports. All ports on the switch receive the same allocation of egress shared buffers.

If you do not configure buffer partitions, the switch uses the default partitioning.



**CAUTION:** Changing the buffer configuration is a disruptive event. Traffic stops on *all* ports until buffer reprogramming is complete.

**Default** The default egress buffer partition shown in [Table 438 on page 5172](#) supports networks with a balanced mix of best-effort, multicast, and lossless traffic. It is the recommended configuration if you are using the default configuration with two lossless forwarding classes.

**Table 438: Default Egress Shared Buffer Partitioning**

| Lossless Partition | Lossy Partition | Multicast Partition |
|--------------------|-----------------|---------------------|
| 50%                | 31%             | 19%                 |

The sum of the default percentages configured for each partition is 100 percent. The sum of the partition percentages must always total 100 percent.

**Options** **lossless**—Shared buffer space reserved for all lossless egress traffic.



**lossy**—Shared buffer space for best-effort unicast egress traffic.

**multicast**—Shared buffer space reserved for all multicast (including broadcast and destination lookup fail) egress traffic.

**percent percent**—The percentage of buffer space to allocate to the specified buffer partition (lossless, lossy, or multicast buffers). The sum of the percentages for the three buffer partitions must total 100 percent.

**Required Privilege Level** interfaces—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

- Related Documentation**
- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Best-Effort Unicast Traffic on page 5103](#)
  - [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Multicast Traffic on page 5109](#)
  - [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Lossless Traffic on page 5114](#)
  - [Configuring Global Ingress and Egress Shared Buffers on page 5153](#)
  - [Understanding CoS Buffer Configuration on page 4914](#)



## buffer-partition (Ingress)

**Syntax** `buffer-partition (lossless | lossless-headroom | lossy) {  
percent percentage;  
}`

**Hierarchy Level** [edit [class-of-service shared-buffer ingress](#)]

**Release Information** Statement introduced in Junos OS Release 12.3 for the QFX Series.

**Description** The ingress shared buffer pool is divided into three partitions. Each partition reserves a percentage of the available shared buffer pool for a type of traffic, so that the switch provides enough resources to support a mix of best effort (best-effort unicast and multicast) and lossless traffic. To better support the mix of traffic on your network, you can optimize the allocation of ingress shared buffers to different types of traffic by fine-tuning the shared buffer partitions.

The percentages you configure for the three ingress shared buffer partitions must total exactly 100 percent. If the total of the three shared buffer percentages is not 100 percent, the system returns a commit error and does not commit the configuration. You can configure any partition to 0 (zero) percent as long as the allocation to other partitions totals 100 percent.

This is a global allocation that applies to all ingress traffic. All ports on the switch receive the same allocation of ingress shared buffers.

If you do not configure buffer partitions, the switch uses the default partitioning.



**CAUTION:** Changing the buffer configuration is a disruptive event. Traffic stops on *all* ports until buffer reprogramming is complete.

**Default** The default ingress buffer partition shown in [Table 439 on page 5174](#) supports networks with a balanced mix of best-effort, multicast, and lossless traffic. It is the recommended configuration if you are using the default configuration with two lossless forwarding classes.

**Table 439: Default Ingress Shared Buffer Partitioning**

| Lossless Partition | Lossless-Headroom Partition | Lossy Partition |
|--------------------|-----------------------------|-----------------|
| 9%                 | 45%                         | 46%             |

The sum of the default percentages configured for each partition is 100 percent. The sum of the partition percentages always must total 100 percent.

**Options** **lossless**—Shared buffer space reserved for all lossless ingress traffic.



**lossless-headroom**—Shared buffer space reserved to store packets received while either an 802.3x Ethernet PAUSE or a priority-based flow control (PFC) pause is asserted. (When an ingress interface pauses traffic, it must have the buffer space to store all of the packets currently in the buffer, and also all of the packets received before the connected peer stops sending traffic and the wire is cleared of packets.)

**lossy**—Shared buffer space for best-effort ingress traffic.

**percent *percent***—The percentage of buffer space to allocate to the specified buffer partition (lossless, lossless-headroom, or lossy buffers). The sum of the percentages for the three buffer partitions must total 100 percent.

**Required Privilege Level** interfaces—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Best-Effort Unicast Traffic on page 5103](#)
- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Multicast Traffic on page 5109](#)
- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Lossless Traffic on page 5114](#)
- [Configuring Global Ingress and Egress Shared Buffers on page 5153](#)
- [Understanding CoS Buffer Configuration on page 4914](#)



## buffer-size

---

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>buffer-size (percent <i>percent</i>   remainder);</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>     | [edit <code>class-of-service schedulers <i>scheduler-name</i></code> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b> | Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>         | <p>Set the dedicated buffer size of the egress queue that you bind the scheduler to in the scheduler map configuration. The switch allocates space from the global dedicated buffer pool to ports and queues in a hierarchical manner. The switch allocates an equal number of dedicated buffers to each egress port, so each egress port receives the same amount of dedicated buffer space. The amount of dedicated buffer space per port is not configurable.</p> <p>However, the <b>buffer-size</b> statement allows you to control the way each port allocates its share of dedicated buffers to its queues. For example, if a port only uses two queues to forward traffic, you can configure the port to allocate all of its dedicated buffer space to those two ports and avoid wasting buffer space on queues that are not in use. We recommend that the buffer size should be the same size as the minimum guaranteed transmission rate (the <b>transmit-rate</b>).</p> <p>You configure the proportion of port dedicated buffers allocated to a particular output queue using the following process:</p> <ol style="list-style-type: none"><li>1. Configure a scheduler and set the <b>buffer-size</b> option to match the scheduler <b>transmit-rate</b> value.</li><li>2. Use a scheduler map to map the scheduler to the forwarding class that is mapped to the queue to which you want to apply the buffer size.</li></ol> <p>For example, suppose that you want to change the dedicated buffer allocation for FCoE traffic. FCoE traffic is mapped to the <code>fcoe</code> forwarding class, and the <code>fcoe</code> forwarding class is mapped to queue 3 (this is the default configuration). To use default FCoE traffic mapping, in the scheduler map configuration, map the scheduler to the <b>fcoe</b> forwarding class.</p> <ol style="list-style-type: none"><li>3. Associate the scheduler map with the traffic control profile you want to use on the egress ports that carry FCoE traffic.</li><li>4. Associate the traffic control profile that includes the scheduler map with the desired egress ports. For this example, you associate the traffic control profile with the ports that carry FCoE traffic.</li></ol> <p>Queue 3, which is mapped to the <code>fcoe</code> forwarding class and therefore to the FCoE traffic, receives the dedicated buffer allocation specified in the <b>buffer-size</b> statement.</p> |



**NOTE:** The total of all of the explicitly configured buffer size percentages for all of the queues on a port cannot exceed 100 percent.

---



**Default** The port allocates dedicated buffers to queues that have an explicitly configured scheduler buffer size. If you do not explicitly configure a scheduler buffer size for a queue, the port serves the explicitly configured queues first. Then the port divides the remaining dedicated buffers equally among the queues that have an explicitly attached scheduler *without* an explicitly configured buffer size configuration. (If you configure a scheduler, but you do not configure the buffer size parameter, the default is equivalent to configuring the buffer size with the **remainder** option.)

If you use the default scheduler and scheduler map on a port (no explicit scheduler configuration), then the port allocates its dedicated buffer pool to queues based on the default scheduling, as shown in [Table 440 on page 5177](#). The default buffer size is the same as the default transmit rate for each default queue:

**Table 440: Default Output Queue Buffer Sizes**

| Queue Number | Forwarding Class | Transmit Rate | Buffer Size |
|--------------|------------------|---------------|-------------|
| 0            | best-effort      | 5%            | 5%          |
| 3            | fcoe             | 35%           | 35%         |
| 4            | no-loss          | 35%           | 35%         |
| 7            | network-control  | 5%            | 5%          |
| 8            | mcast            | 20%           | 20%         |

Because the default scheduler includes only five forwarding classes, only the queues mapped to those forwarding classes receive dedicated buffers from the port buffer pool. (Buffers are not wasted on queues that do not carry traffic.)

**Options** **percent *percent***—Percentage of the port dedicated buffer pool allocated to the queue (or queues) mapped to the scheduler.

**remainder**—Remaining dedicated buffer pool after the port satisfies the needs of the explicitly configured buffers. The port divides the remaining buffers equally among the queues that are explicitly attached to a scheduler but that do not have an explicit buffer size configuration (or are configured with **remainder** as the buffer size).

**Required Privilege Level** **interfaces**—To view this statement in the configuration.  
**interface-control**—To add this statement to the configuration.




- Related Documentation**
- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Best-Effort Unicast Traffic on page 5103](#)
  - [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Multicast Traffic on page 5109](#)
  - [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Lossless Traffic on page 5114](#)
  - [Understanding CoS Buffer Configuration on page 4914](#)

---

## cable-length (Congestion Notification)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>cable-length <i>cable-length-value</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service congestion-notification-profile <i>profile-name</i></a> <a href="#">input</a> ]                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | <p>Specify the length of the cable between the interface and its peer interface in meters. The system uses the cable length and the maximum receive unit (MRU) to calculate the amount of buffer headroom reserved to support priority-based flow control (PFC). The the shorter the cable length and lower the MRU, the less headroom buffer space is required for PFC.</p>                                                                                                                             |
|                                 | <div><p><b>NOTE:</b> You can also set a maximum transmission unit (MTU) value (the largest packet size the interface sends) for interfaces by including the <code>mtu</code> statement at the [edit <a href="#">interfaces <i>interface-name</i></a>] hierarchy level.</p></div>                                                                                                                                      |
| <b>Default</b>                  | The default cable length value is 100 meters (approximately 328 feet).                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <code><i>cable-length-value</i></code> —Length of the cable in meters. (Generally from 1 to 300 meters, but there is no configuration restriction.)                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | <code>interfaces</code> —To view this statement in the configuration.<br><code>interface-control</code> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring CoS PFC (Congestion Notification Profiles) on page 5145</a></li><li>• <a href="#">Example: Configuring Two or More Lossless FCoE IEEE 802.1p Priorities on Different FCoE Transit Switch Interfaces on page 5065</a></li><li>• <a href="#">Understanding CoS Flow Control (Ethernet PAUSE and PFC) on page 4476</a></li><li>• <a href="#">Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896</a></li></ul> |



## class-of-service

```

Syntax  class-of-service {
        classifiers {
            (dscp | dscp-ipv6 | ieee-802.1) classifier-name {
                import (classifier-name | default);
                forwarding-class class-name {
                    loss-priority level {
                        code-points [ aliases ] [ bit-patterns ];
                    }
                }
            }
        }
        code-point-aliases {
            (dscp | dscp-ipv6 | ieee-802.1) {
                alias-name bits;
            }
        }
        congestion-notification-profile profile-name {
            input {
                ieee-802.1 {
                    code-point [code-point-bits] {
                        pfc {
                            mru mru-value;
                        }
                    }
                }
                cable-length cable-length-value;
            }
            output {
                ieee-802.1 {
                    code-point [code-point-bits] {
                        flow-control-queue [queue | list-of-queues];
                    }
                }
            }
        }
        drop-profiles {
            profile-name {
                interpolate {
                    fill-level low-value fill-level high-value drop-probability 0 drop-probability high-value;
                }
            }
        }
        forwarding-class class-name {
            loss-priority level {
                code-points [ aliases ] [ bit-patterns ];
            }
        }
        forwarding-class class-name {
            scheduler scheduler-name;
        }
        forwarding-class-sets forwarding-class-set-name {
            class class-name;
        }
    }

```



```

}
forwarding-classes {
  class {
    class-name {
      queue-num queue-number <no-loss>;
    }
  }
}
host-outbound-traffic {
  forwarding-class class-name;
  dscp-code-point code-point;
}
interfaces {
  interface-name {
    congestion-notification-profile profile-name {
    }
    forwarding-class lossless-forwarding-class-name;
    forwarding-class-set forwarding-class-set-name {
      output-traffic-control-profile profile-name;
    }
    rewrite-value {
      input {
        ieee-802.1 {
          code-point code-point-bits;
        }
      }
    }
    unit logical-unit-number {
      classifiers {
        (dscp | dscp-ipv6 | ieee-802.1) (classifier-name | default);
      }
      forwarding-class class-name;
      rewrite-rules {
        (dscp | dscp-ipv6 | ieee-802.1) (classifier-name | default);
      }
    }
  }
}
multi-destination {
  classifiers {
    (dscp | ieee-802.1) classifier-name;
  }
}
rewrite-rules {
  (dscp | dscp-ipv6 | ieee-802.1) classifier-name {
    import (rewrite-name | default);
    forwarding-class class-name {
      loss-priority priority code-point (alias | bits);
    }
  }
}
scheduler-maps {
  map-name {
    forwarding-class class-name scheduler scheduler-name;
  }
}

```



```

schedulers {
  scheduler-name {
    buffer-size (percent percentage | remainder);
    drop-profile-map loss-priority (low | medium-high | high) protocol protocol drop-profile
      drop-profile-name;
    priority priority;
    shaping-rate (rate | percent percentage);
    transmit-rate (percent percentage);
  }
}
shared-buffer {
  egress {
    percent percent;
    buffer-partition (lossless | lossy | multicast) {
      percent percent
    }
  }
  ingress {
    percent percent;
    buffer-partition (lossless | lossless-headroom | lossy) {
      percent percent
    }
  }
}
traffic-control-profiles profile-name {
  guaranteed-rate(rate| percent percentage);
  scheduler-map map-name;
  shaping-rate (rate| percent percentage);
}

```

**Hierarchy Level** [edit]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure class-of-service parameters on the switch.

The remaining statements are explained separately.

**Default** If you do not configure any CoS features, the default CoS settings are used.

**Required Privilege** interfaces—To view this statement in the configuration.

**Level** interface-control—To add this statement to the configuration.




**Related  
Documentation**

- [Assigning CoS Components to Interfaces on page 5157](#)
- [Defining CoS Unicast BA Classifiers on page 5133](#)
- [Defining CoS Multidestination \(Multicast, Broadcast, DLF\) BA Classifiers on page 5135](#)
- [Defining CoS Code-Point Aliases on page 5133](#)
- [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
- [Configuring CoS Drop Profile Maps on page 5137](#)
- [Defining CoS Forwarding Class Sets on page 5139](#)
- [Defining CoS Forwarding Classes on page 5137](#)
- [Defining CoS Rewrite Rules on page 5155](#)
- [Defining CoS Queue Schedulers on page 5139](#)
- [Configuring CoS Tail-Drop Profiles on page 5136](#)
- [Defining CoS Traffic Control Profiles \(Priority Group Scheduling\) on page 5143](#)
- [Overview of Junos OS CoS for the QFX Series on page 4804](#)



## class (Forwarding Classes)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> class {   class-name {     queue-num queue-number &lt;no-loss&gt;;   } } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service forwarding-classes</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>No-loss option introduced in Junos OS Release 12.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | <p>Map one or more forwarding classes to a single queue. You can map unicast forwarding classes to a unicast queue (0 through 7) and multdestination forwarding classes to a multicast queue (8 through 11). The queue to which you map a forwarding class determines if the forwarding class is a unicast or multicast forwarding class.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                 | <div>  <p><b>NOTE:</b> If you are using Junos OS Release 12.2, use the default forwarding-class-to-queue mapping for the lossless fcoe and no-loss forwarding classes. If you explicitly configure the lossless forwarding classes, the traffic mapped to those forwarding classes is treated as lossy (best effort) traffic and does <i>not</i> receive lossless treatment.</p> <p>If you are using Junos OS Release 12.3 or later, the default configuration is the same as the default configuration for Junos OS Release 12.2, and the default behavior is the same (the fcoe and no-loss forwarding classes receive lossless treatment). However, if you explicitly configure lossless forwarding classes, you can configure up to six lossless forwarding classes by specifying the no-loss option. If you do not specify the no-loss option in an explicit forwarding class configuration, the forwarding class is lossy. For example, if you explicitly configure the fcoe forwarding class and you do not include the no-loss option, the fcoe forwarding class is lossy, not lossless.</p> </div> |
| <b>Options</b>                  | <p><b>class-name</b> —Name of the forwarding class.</p> <p>The remaining statement is explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Forwarding Classes on page 5024</a></li> <li>• <a href="#">Understanding CoS Forwarding Classes on page 4860</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |



## class (Forwarding Class Sets)

---

|                                 |                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>class <i>class-name</i>;</code>                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service forwarding-class-sets</a> <i>forwarding-class-set-name</i> ]                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Group forwarding classes into sets of forwarding classes (priority groups). You can group some or all of the configured forwarding classes into up to three unicast forwarding class sets and one multidestination forwarding class set.                                                                                      |
| <b>Options</b>                  | <i>class-name</i> —Name of the forwarding class.                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | interfaces—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring CoS Hierarchical Port Scheduling (ETS) on page 4962</a></li><li>• <a href="#">Example: Configuring Forwarding Class Sets on page 5027</a></li><li>• <a href="#">Understanding CoS Forwarding Class Sets (Priority Groups) on page 4865</a></li></ul> |



## classifiers

|                                         |                                                                                                                                                                                                                                                                                                                       |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                           | <pre> classifiers {   (dscp   dscp-ipv6   ieee-802.1) classifier-name {     import (classifier-name   default);     forwarding-class class-name {       loss-priority level {         code-points [ aliases ] [ bit-patterns ];       }     }   } } </pre>                                                            |
| <b>Multidestination BA Classifiers</b>  | <pre> classifiers {   (dscp   ieee-802.1) classifier-name; } </pre>                                                                                                                                                                                                                                                   |
| <b>Interface Classifier Association</b> | <pre> classifiers {   (dscp   dscp-ipv6   ieee-802.1) (default   classifier-name); } </pre>                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>                  | <pre> [edit class-of-service], [edit class-of-service multi-destination], [edit class-of-service interfaces interface-name unit logical-unit-number] </pre>                                                                                                                                                           |
| <b>Release Information</b>              | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                     |
| <b>Description</b>                      | Define a unicast or multidestination CoS behavior aggregate (BA) classifier.                                                                                                                                                                                                                                          |
| <b>Options</b>                          | The statements are explained separately.                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b>         | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                   |
| <b>Related Documentation</b>            | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Unicast Classifiers on page 5014</a></li> <li>• <a href="#">Example: Configuring Multidestination (Multicast, Broadcast, DLF) Classifiers on page 5017</a></li> <li>• <a href="#">Understanding CoS Classifiers on page 4846</a></li> </ul> |



## code-point (Fibre Channel Interfaces)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>code-point <i>code-point-bits</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service interfaces</a> <i>fibre-channel-interface-name</i> <a href="#">rewrite-value</a> <a href="#">input ieee-802.1</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | <p>Configure the IEEE 802.1p code point value assigned to all traffic received from the Fibre Channel (FC) network on the specified FC interface (NP_Port). When native FC traffic from the FC SAN arrives at the NP_Port interface, the NP_Port interface encapsulates it in Ethernet to create FCoE packets before forwarding the traffic onto the FCoE network. Instead of using the default value of priority 3 (code point 011) for the FCoE traffic, the interface rewrites the IEEE 802.1p code point to the value specified in the rewrite value code points.</p> <p>After the code point value is rewritten, the interface forwards the traffic to the Ethernet (FCoE) network. This works in conjunction with configuring a fixed classifier on the FC interface. The fixed classifier maps all traffic from the FC network into one lossless forwarding class (the lossless forwarding class must be mapped to the code point specified in the rewrite value). Traffic mapped to the lossless forwarding class uses the IEEE 802.1p priority specified by the code point bits in the rewrite value.</p> <p>FCoE traffic typically uses priority 3 (IEEE code point 011). The QFX Series default configuration uses IEEE 802.1p priority 3 for FCoE traffic. Rewriting the code point value enables you to change the IEEE 802.1p priority of the FCoE traffic if the Ethernet network uses a different priority than priority 3 (code point 011).</p> <p>The system supports only one IEEE 802.1p code point value per FC interface. You cannot configure more than one IEEE 802.1p rewrite value per FC interface. In addition, you can specify only one rewrite value per local FCoE-FC gateway fabric; all interfaces in the local fabric must use the same rewrite value. Attempting to configure FC interfaces in the same local fabric with different rewrite values generates a commit error. You can specify different rewrite values for interfaces that belong to different local FCoE-FC gateway fabrics.</p> |
| <b>Options</b>                  | <i>code-point-bits</i> —Value of the code-point bits, in decimal form.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">forwarding-class (Fibre Channel Interfaces) on page 5212</a></li> <li>• <a href="#">Example: Configuring IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 5094</a></li> <li>• <a href="#">Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 4911</a></li> <li>• <a href="#">Understanding CoS Classifiers on page 4846</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



## code-point (Input Congestion Notification)

---

|                                 |                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | code-point [ <i>code-point-bits</i> ] {<br>pfc {<br>mru <i>mru-value</i> ;<br>}<br>}                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit <b>class-of-service congestion-notification-profile</b> <i>profile-name</i> <b>input</b> <b>ieee-802.1</b> ]                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Enable priority-based flow control (PFC) on an IEEE 802.1p code point (priority).                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <p><b>code-point-bits</b>—3-bit value in decimal form.</p> <p>The remaining statements are described separately.</p>                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS PFC for FCoE Traffic on page 4509</a></li> <li>• <a href="#">Configuring CoS PFC (Congestion Notification Profiles) on page 5145</a></li> <li>• <a href="#">Understanding CoS Flow Control (Ethernet PAUSE and PFC) on page 4476</a></li> </ul> |



## code-point (Output Congestion Notification)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>code-point [ <i>code-point-bits</i> ] {<br/>    <i>flow-control-queue</i> [ <i>queue</i>   <i>list-of-queues</i> ];<br/>}</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit <i>class-of-service congestion-notification-profile profile-name output ieee-802.1</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Specify the IEEE 802.1p code point bits that identify the traffic you want to enable for priority-based flow control (PFC) pause.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Default</b>                  | <p>By default, IEEE 802.1p priorities 3 and 4 (code points 011 and 100, respectively) are enabled for PFC pause on all Ethernet interfaces. If you explicitly configure priorities to pause and the output queues on which to enable pause, the explicit configuration overrides the default configuration. When you apply an explicit output congestion notification profile to an interface, only the priorities and queues specified in the output congestion notification profile are enabled for pause on that interface.</p> <p>For example, if you configure an output congestion notification profile that specifies priority 2 (code point 010), then traffic with IEEE 802.1p priority 2 is paused on the configured output queue during periods of congestion. However, traffic with priority 3 and priority 4 is not programmed to pause, because the explicit configuration overwrites the default configuration, and the explicit configuration does not pause priority 3 and priority 4. If you configure an explicit output congestion notification profile, all of the priorities you want to enable for PFC and all of the output queues you want to pause must be explicitly configured.</p> |
| <b>Options</b>                  | <p><i>code-point-bits</i>—3-bit value in decimal form.</p> <p>The remaining statements are described separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring CoS PFC (Congestion Notification Profiles) on page 5145</a></li><li>• <a href="#">Example: Configuring Two or More Lossless FCoE IEEE 802.1p Priorities on Different FCoE Transit Switch Interfaces on page 5065</a></li><li>• <a href="#">Example: Configuring Two or More Lossless FCoE Priorities on the Same FCoE Transit Switch Interface on page 5056</a></li><li>• <a href="#">Example: Configuring Lossless FCoE Traffic When the Converged Ethernet Network Does Not Use IEEE 802.1p Priority 3 for FCoE Traffic (FCoE Transit Switch) on page 5048</a></li><li>• <a href="#">Example: Configuring Lossless IEEE 802.1p Priorities on Ethernet Interfaces for Multiple Applications (FCoE and iSCSI) on page 5078</a></li><li>• <a href="#">Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896</a></li></ul>                                                                                                                                                                                                                                                                                             |



## code-point (Rewrite Rules)

|                                 |                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>code-point [ <i>alias</i> ] [ <i>bit-pattern</i> ];</code>                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service rewrite-rules</a> ( <a href="#">dscp</a>   <a href="#">dscp-ipv6</a>   <a href="#">ieee-802.1</a> ) <a href="#">forwarding-class</a> <a href="#">class-name</a> <a href="#">loss-priority</a> <a href="#">level</a> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                        |
| <b>Description</b>              | Configure a code-point alias or bit set to apply to a forwarding class for a rewrite rule.                                                                                                                                                               |
| <b>Options</b>                  | <p><i>alias</i>—Name of the alias.</p> <p><i>bit-pattern</i>—Value of the code-point bits, in decimal form.</p>                                                                                                                                          |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Defining CoS Rewrite Rules on page 5155</a></li> <li>• <a href="#">Understanding CoS Classifiers on page 4846</a></li> </ul>                                                                        |

## code-point-aliases

|                                 |                                                                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>code-point-aliases {   (<a href="#">dscp</a>   <a href="#">dscp-ipv6</a>   <a href="#">ieee-802.1</a>) {     <i>alias-name</i> <i>bits</i>;   } }</pre>                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service</a> ]                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                |
| <b>Description</b>              | Define an alias for a CoS marker. You can use the alias instead of the bit pattern when you specify the code point during configuration.                                                                                                                                         |
| <b>Options</b>                  | <p>(<a href="#">dscp</a>   <a href="#">dscp-ipv6</a>   <a href="#">ieee-802.1</a>)—Set the type of classifier for which you are creating an alias.</p> <p><i>alias-name</i>—Name of the code-point alias.</p> <p><i>bits</i> —Value of the code-point bits, in decimal form.</p> |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Defining CoS Code-Point Aliases on page 5133</a></li> <li>• <a href="#">Understanding CoS Code-Point Aliases on page 4844</a></li> </ul>                                                                                    |



## code-points (Application Maps)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>code-points [ <i>aliases</i> ] [ <i>bit-patterns</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit policy-options <b>application-maps</b> <i>application-map-name</i> <b>application</b> <i>application-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.1 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Define one or more code-point aliases or bit sets for an application.                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <i>aliases</i> —Name of the alias or aliases.<br><br><i>bit-patterns</i> —Value of the code-point bits, in decimal form.                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring an Application Map for DCBX Application Protocol TLV Exchange on page 4606</a></li><li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li><li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li></ul> |


## code-points (CoS)

---

|                                 |                                                                                                                                                                                                              |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>code-points [ <i>aliases</i> ] [ <i>bit-patterns</i> ];</code>                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit <b>class-of-service</b> <b>classifiers</b> ( <b>dscp</b>   <b>dscp-ipv6</b>   <b>ieee-802.1</b> ) <i>classifier-name</i> <b>forwarding-class</b> <i>class-name</i> <b>loss-priority</b> <i>level</i> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                            |
| <b>Description</b>              | Configure one or more code-point aliases or bit sets to apply to a forwarding class.                                                                                                                         |
| <b>Options</b>                  | <i>aliases</i> —Name of the alias or aliases.<br><br><i>bit-patterns</i> —Value of the code-point bits, in decimal form.                                                                                     |
| <b>Required Privilege Level</b> | interfaces—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Unicast Classifiers on page 5014</a></li><li>• <a href="#">Understanding CoS Classifiers on page 4846</a></li></ul>                 |




## configured-flow-control

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | configured-flow-control {<br><b>rx-buffers</b> (on   off);<br><b>tx-buffers</b> (on   off);<br>}                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit <b>interfaces</b> <i>interface-name</i> <b>ether-options</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | <p>Configure Ethernet PAUSE asymmetric flow control on an interface. You can set an interface to generate and send PAUSE messages, and you can set an interface to respond to PAUSE messages sent by the connected peer. You must set both the <b>rx-buffers</b> and the <b>tx-buffers</b> values when you configure asymmetric flow control.</p> <p>Use the <b>flow-control</b> and <b>no-flow-control</b> statements to enable and disable symmetric PAUSE on an interface. Symmetric flow control and asymmetric flow control are mutually exclusive features. If you attempt to configure both, the switch returns a commit error.</p> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 10px;">  <p><b>NOTE:</b> Ethernet PAUSE temporarily stops transmitting all traffic on a link when the buffers fill to a certain threshold. To temporarily pause traffic on individual “lanes” of traffic (each lane contains the traffic associated with a particular IEEE 802.1p code point, so there can be eight lanes of traffic on a link), use priority-based flow control (PFC) by applying a congestion notification profile to the interface.</p> <p>Ethernet PAUSE and PFC are mutually exclusive features, so you cannot configure both of them on the same interface. If you attempt to configure both Ethernet PAUSE and PFC on an interface, the switch returns a commit error.</p> </div> |
| <b>Default</b>                  | Flow control is disabled. You must explicitly configure Ethernet PAUSE flow control on interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                  | The statements are explained separately.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">congestion-notification-profile on page 5192</a></li> <li>• <a href="#">flow-control on page 2066</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |



## congestion-notification-profile

|                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                | <pre> congestion-notification-profile <i>profile-name</i> {   input {     ieee-802.1 {       code-point [<i>code-point-bits</i>] {         pfc {           mru <i>mru-value</i>;         }       }     }     cable-length <i>cable-length-value</i>;   }   output {     ieee-802.1 {       code-point [<i>code-point-bits</i>] {         flow-control-queue [<i>queue</i>   <i>list-of-queues</i>];       }     }   } } </pre> |
| <b>Interface Congestion Notification Profile Association</b> | congestion-notification-profile <i>profile-name</i> {                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>                                       | [edit <i>class-of-service</i> ],<br>[edit <i>class-of-service interfaces interface-name</i> ]                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>                                   | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>                                           | Configure a congestion notification profile to enable priority-based flow control (PFC) on traffic specified by an IEEE 802.1 code point, and apply the profile to an interface.                                                                                                                                                                                                                                               |
|                                                              | <div>  <p><b>NOTE:</b> You must configure PFC for FCoE traffic. Each interface that carries FCoE traffic should be configured for PFC on the FCoE code point (usually 011).</p> </div>                                                                                                                                                      |
|                                                              | <p>You can attach a maximum of one congestion notification profile to an interface. There is no limit to the total number of congestion notification profiles you can create.</p>                                                                                                                                                                                                                                              |
| <b>Options</b>                                               | <p><i>profile-name</i>—Name of the congestion notification profile.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b>                              | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>                                 | <ul style="list-style-type: none"> <li>Configuring CoS PFC (Congestion Notification Profiles) on page 5145</li> </ul>                                                                                                                                                                                                                                                                                                          |



- [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)
- [Example: Configuring Two or More Lossless FCoE IEEE 802.1p Priorities on Different FCoE Transit Switch Interfaces on page 5065](#)
- [Example: Configuring Two or More Lossless FCoE Priorities on the Same FCoE Transit Switch Interface on page 5056](#)
- [Example: Configuring Lossless FCoE Traffic When the Converged Ethernet Network Does Not Use IEEE 802.1p Priority 3 for FCoE Traffic \(FCoE Transit Switch\) on page 5048](#)
- [Example: Configuring Lossless IEEE 802.1p Priorities on Ethernet Interfaces for Multiple Applications \(FCoE and iSCSI\) on page 5078](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)
- [Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896](#)




## dcbx

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>dcbx {<br/>  disable;<br/>  interface (<i>interface-name</i>   all) {<br/>    disable;<br/>    application-map <i>application-map-name</i>;<br/>    applications {<br/>      no-auto-negotiation;<br/>    }<br/>    enhanced-transmission-selection {<br/>      no-auto-negotiation;<br/>      recommendation-tlv {<br/>        no-auto-negotiation;<br/>      }<br/>    }<br/>    mode (auto-negotiate   ieee-dcbx   dcbx-version-1.01);<br/>    priority-flow-control {<br/>      no-auto-negotiation;<br/>    }<br/>  }<br/>}</pre> |
| Hierarchy Level          | [edit <a href="#">protocols</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Release Information      | Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>Statement introduced in Junos OS Release 11.3 for EX Series switches.<br><b>mode</b> and <b>recommendation-tlv</b> statements introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                                                  |
| Description              | Configure DCBX properties.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Options                  | The statements are explained separately.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Required Privilege Level | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">show dcbx neighbors on page 4694</a></li><li>• <a href="#">Understanding DCB Features and Requirements on page 4389</a></li><li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li><li>• <a href="#">Understanding DCB Features and Requirements on EX Series Switches</a></li><li>• <a href="#">Disabling DCBX to Disable PFC Autonegotiation on EX Series Switches (CLI Procedure)</a></li></ul>                                                                     |



## destination-port (Applications)

|                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                    | <code>destination-port <i>port-value</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>                                                                                                                                                                                                           | [edit applications <b>application</b> <i>application-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>                                                                                                                                                                                                       | Statement introduced in Junos OS Release 12.1 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>                                                                                                                                                                                                               | Transmission Control Protocol (TCP) or User Datagram Protocol (UDP) destination port number, which combines with <b>protocol</b> to identify an application type. The Internet Assigned Numbers Authority (IANA) assigns port numbers. See the <i>IANA Service Name and Transport Protocol Port Number Registry</i> at <a href="http://www.iana.org/assignments/service-names-port-numbers/service-names-port-numbers.xml">http://www.iana.org/assignments/service-names-port-numbers/service-names-port-numbers.xml</a> for a list of assigned port numbers. |
| <div>  <p><b>NOTE:</b> To create an application for iSCSI, use the protocol <b>tcp</b> with the destination port number <b>3260</b>.</p> </div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                                                                                                                                                                                                                   | <b><i>port-value</i></b> —Identifier for the port.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b>                                                                                                                                                                                                  | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>                                                                                                                                                                                                     | <ul style="list-style-type: none"> <li>• <a href="#">Defining an Application for DCBX Application Protocol TLV Exchange on page 4604</a></li> <li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li> <li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li> <li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li> <li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li> </ul>               |



## disable (DCBX)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | disable                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit <a href="#">protocols dcbx</a> ]<br><br>[edit <a href="#">protocols dcbx interface</a> <i>interface-name</i> ]                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>Statement introduced in Junos OS Release 11.3 for EX Series switches.                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | Disable Data Center Bridging Capability Exchange protocol (DCBX) on one or more 10-Gigabit Ethernet interfaces.                                                                                                                                                                                                                                                                                              |
| <b>Default</b>                  | DCBX is enabled by default on all 10-Gigabit or higher Ethernet interfaces.<br><br>DCBX is enabled by default on all 10-Gigabit Ethernet interfaces on EX4500 CEE-enabled switches.                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li><li>• <a href="#">Disabling DCBX to Disable PFC Autonegotiation on EX Series Switches (CLI Procedure)</a></li><li>• <a href="#">Understanding DCB Features and Requirements on page 4389</a></li><li>• <a href="#">Understanding DCB Features and Requirements on EX Series Switches</a></li></ul> |



## drop-probability

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>drop-probability 0 drop-probability <i>high-value</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service drop-profiles</a> <i>profile-name</i> <a href="#">interpolate</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | When configuring WRED, map the packet <b>drop-probability</b> to the fullness of a queue ( <b>fill-level</b> ). You configure the <b>fill-level</b> and <b>drop-probability</b> statements in related pairs by specifying a low <b>fill-level</b> value at which packets begin to drop (the drop probability is zero until the queue reaches this level of fullness) and a high <b>fill-level</b> value at which packets drop at the highest drop probability. As the queue fills from the low fill level to the high fill level, the rate of packet drop increases in a linear pattern from zero to the high drop probability. |
| <b>Options</b>                  | <p><b>0</b>—Probability that packets will drop at the lowest <b>fill-level</b> value. This is always zero, because until the queue reaches the specified low <b>fill-level</b> value, no packets are scheduled to drop.</p> <p><b>high-value</b>—The maximum probability that packets will drop before queue fullness exceeds the high value of the queue <b>fill-level</b>, expressed as a percentage. If the queue fills beyond the high <b>fill-level</b> value, all packets drop.</p> <p><b>Range:</b> 0 through 100</p>                                                                                                    |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Tail-Drop Profiles on page 5019</a></li> <li>• <a href="#">Understanding CoS Tail-Drop Profiles on page 4929</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                           |



## drop-profile

---

|                                 |                                                                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>drop-profile <i>profile-name</i>;</code>                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service schedulers scheduler-name</a> <a href="#">drop-profile-map</a> <a href="#">loss-priority</a> (low   medium-high   high) <a href="#">protocol protocol</a> ]                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                |
| <b>Description</b>              | Define drop profiles for random early detection (RED). When a packet arrives, RED checks the queue fill level specified in the drop profile. If the fill level corresponds to a nonzero drop probability, the RED algorithm determines whether to drop the arriving packet.      |
| <b>Options</b>                  | <i>profile-name</i> —Name of the drop profile.                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | interfaces—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Drop Profile Maps on page 5022</a></li><li>• <a href="#">Example: Configuring Tail-Drop Profiles on page 5019</a></li><li>• <a href="#">Understanding CoS Tail-Drop Profiles on page 4929</a></li></ul> |

## drop-profile-map

---

|                                 |                                                                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>drop-profile-map <a href="#">loss-priority</a> (low   medium-high   high) <a href="#">protocol protocol</a> <a href="#">drop-profile</a> <i>drop-profile-name</i>;</code>                                                                                                  |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service schedulers scheduler-name</a> ]                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                |
| <b>Description</b>              | Map a drop profile to a loss priority and protocol for random early detection (RED). When a packet arrives, RED checks the queue fill level. If the fill level corresponds to a nonzero drop probability, the RED algorithm determines whether to drop the arriving packet.      |
| <b>Options</b>                  | The statements are explained separately.                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | interfaces—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Drop Profile Maps on page 5022</a></li><li>• <a href="#">Example: Configuring Tail-Drop Profiles on page 5019</a></li><li>• <a href="#">Understanding CoS Tail-Drop Profiles on page 4929</a></li></ul> |



## drop-profiles

|                                 |                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>drop-profiles {   profile-name {     interpolate {       fill-level low-value fill-level high-value drop-probability 0 drop-probability high-value;     }   } }</pre>                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service</a> ]                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | <p>Define drop profiles for weighted random early detection (WRED).</p> <p>For a packet to be dropped, it must match the drop profile. When a packet arrives, WRED checks the queue fill level. If the fill level corresponds to a nonzero drop probability, the WRED algorithm determines whether to drop the arriving packet.</p> |
| <b>Options</b>                  | <p><b>profile-name</b>—Name of the drop profile.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Tail-Drop Profiles on page 5019</a></li> <li>• <a href="#">Understanding CoS Tail-Drop Profiles on page 4929</a></li> </ul>                                                                                                                               |



## dscp


|                                                  |                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                    | <pre> dscp classifier-name {     import (classifier-name   default);     forwarding-class class-name {         loss-priority level {             code-points [ aliases ] [ bit-patterns ];         }     } } </pre>                                                                                                                                                          |
| <b>Code-Point Alias Configuration</b>            | <code>dscp alias-name bit-pattern;</code>                                                                                                                                                                                                                                                                                                                                    |
| <b>Multidestination Classifier Configuration</b> | <code>dscp classifier-name;</code>                                                                                                                                                                                                                                                                                                                                           |
| <b>Interface Classifier Association</b>          | <code>dscp (classifier-name   default);</code>                                                                                                                                                                                                                                                                                                                               |
| <b>Rewrite Rule Configuration</b>                | <pre> dscp rewrite-name {     import (rewrite-name   default);     forwarding-class class-name {         loss-priority level {             code-point [ aliases ] [ bit-patterns ];         }     } } </pre>                                                                                                                                                                 |
| <b>Hierarchy Level</b>                           | <pre> [edit class-of-service classifiers], [edit class-of-service code-point-aliases], [edit class-of-service multi-destination classifiers], [edit class-of-service interfaces interface-name unit logical-unit-number classifiers], [edit class-of-service interfaces interface-name unit logical-unit-number rewrite-rules], [edit class-of-service rewrite-rules] </pre> |
| <b>Release Information</b>                       | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>                               | Define the Differentiated Services code point (DSCP) mapping that is applied to the packets.                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                                   | <p><b>classifier-name</b>—Name of the classifier.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b>                  | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>                     | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Unicast Classifiers on page 5014</a></li> <li>• <a href="#">Defining CoS Code-Point Aliases on page 5133</a></li> <li>• <a href="#">Defining CoS Rewrite Rules on page 5155</a></li> </ul>                                                                                                         |



- [Assigning CoS Components to Interfaces on page 5157](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Understanding CoS Rewrite Rules on page 4933](#)
- [Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces on page 4851](#)



## dscp-ipv6

|                                         |                                                                                                                                                                                                                                                                                                                       |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                           | <pre> dscp-ipv6 classifier-name {     import (classifier-name   default);     forwarding-class class-name {         loss-priority level {             code-points [ aliases ] [ bit-patterns ];         }     } } </pre>                                                                                              |
| <b>Code-Point Alias Configuration</b>   | <pre> dscp-ipv6 alias-name bit-pattern; </pre>                                                                                                                                                                                                                                                                        |
| <b>Interface Classifier Association</b> | <pre> dscp-ipv6 (classifier-name   default); </pre>                                                                                                                                                                                                                                                                   |
| <b>Rewrite Rule Configuration</b>       | <pre> dscp-ipv6 rewrite-name {     import (rewrite-name   default);     forwarding-class class-name {         loss-priority level {             code-point [ aliases ] [ bit-patterns ];         }     } } </pre>                                                                                                     |
| <b>Hierarchy Level</b>                  | <pre> [edit class-of-service classifiers], [edit class-of-service code-point-aliases], [edit class-of-service interfaces interface-name unit logical-unit-number classifiers], [edit class-of-service interfaces interface-name unit logical-unit-number rewrite-rules], [edit class-of-service rewrite-rules] </pre> |
| <b>Release Information</b>              | Statement introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                     |
| <b>Description</b>                      | Define the Differentiated Services code point (DSCP) IPv6 mapping that is applied to the packets.                                                                                                                                                                                                                     |
|                                         | <div>  <p><b>NOTE:</b> There is no DSCP IPv6 classifier for multdestination (multicast, broadcast, and destination lookup fail) traffic. Multidestination IPv6 traffic uses the multidestination DSCP classifier.</p> </div>       |
| <b>Options</b>                          | The statements are explained separately.                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b>         | interfaces—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                              |
| <b>Related Documentation</b>            | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Unicast Classifiers on page 5014</a></li> <li>• <a href="#">Defining CoS Code-Point Aliases on page 5133</a></li> <li>• <a href="#">Defining CoS Rewrite Rules on page 5155</a></li> </ul>                                                  |



- [Assigning CoS Components to Interfaces on page 5157](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Understanding CoS Rewrite Rules on page 4933](#)
- [Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces on page 4851](#)


## dscp-code-point

---

|                                 |                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>dscp-code-point</code> <i>code-point</i> ;                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit class-of-service <a href="#">host-outbound-traffic</a> ]                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                        |
| <b>Description</b>              | Set the value of the DSCP code point in the type of service (ToS) field of the packet generated by the Routing Engine (host).                                                                                                                            |
| <b>Options</b>                  | <b>code-point</b> —Six-bit DSCP code point value.                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Changing the Host Outbound Traffic Default Queue Mapping on page 5143</a></li> <li>• <a href="#">Understanding Host Routing Engine Outbound Traffic Queues and Defaults on page 4842</a></li> </ul> |



## egress (Buffer Configuration)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>egress {   percent <i>percent</i>;   <b>buffer-partition</b> (lossless   lossy   multicast) {     percent <i>percent</i>;   } }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit <b>class-of-service shared-buffer</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | <p>Configure the global shared buffer pool allocation for egress traffic. The system allocates the shared buffer pool dynamically across its ports as the ports require memory space. Some buffer space is reserved for other buffers such as dedicated buffers (buffers allocated permanently to ports).</p> <p>The percentage you specify is the percentage of available (user-configurable) buffer space allocated to the global shared egress buffer pool. If you allocate less than 100 percent of the available buffer space to the shared buffer pool, the remaining buffer space is added to the dedicated buffer pool. (You cannot directly configure the dedicated buffer pool for each port; dedicated buffers are allocated evenly across all the ports. However, on a port, you can configure the portion of dedicated port buffer space allocated to each queue in the scheduler configuration using the <b>buffer-size</b> option.)</p> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 10px;">  <p><b>CAUTION:</b> Changing the buffer configuration is a disruptive event. Traffic stops on <i>all</i> ports until buffer reprogramming is complete.</p> </div> <p>You can also partition the shared buffer pool to adjust the egress buffer allocations for different mixes of network traffic using the <b>buffer-partition</b> statement.</p> |
| <b>Default</b>                  | The default shared buffer percentage is 100 percent. (All available buffer space is allocated to the shared buffer pool.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <p><b>percent <i>percent</i></b>—Percentage of available egress buffer space allocated to the shared buffer pool. If the percentage is less than 100 percent, the remaining buffer space is allocated to the dedicated buffer pool.</p> <p>The remaining statement is explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Best-Effort Unicast Traffic on page 5103</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Multicast Traffic on page 5109](#)
- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Lossless Traffic on page 5114](#)
- [Configuring Global Ingress and Egress Shared Buffers on page 5153](#)
- [Understanding CoS Buffer Configuration on page 4914](#)


## enhanced-transmission-selection

|                                 |                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>enhanced-transmission-selection {     no-auto-negotiation;     recommendation-tlv {         no-auto-negotiation;     } }</pre>                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit <a href="#">protocols dcbx interface</a> <i>interface-name</i> ]                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | <p>Disable advertising the enhanced transmission selection (ETS) state of the interface to the peer. To disable ETS on the interface, do not enable ETS on the interface in the class-of-service (CoS) configuration.</p> <p>Disabling ETS autonegotiation stops the QFX Series from advertising the ETS Configuration TLV and the ETS Recommendation TLV.</p>        |
| <b>Options</b>                  | <b>no-auto-negotiate</b> —Disable automatic negotiation of priority-based flow control (PFC)                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show dcbx neighbors on page 4694</a></li> <li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li> <li>• <a href="#">Example: Configuring CoS Hierarchical Port Scheduling (ETS) on page 4962</a></li> <li>• <a href="#">Understanding DCB Features and Requirements on page 4389</a></li> </ul> |



## ether-type

---

|                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                    | <code>ether-type <i>ether-type</i>;</code>                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>                                                                                                                                           | [edit applications <b>application</b> <i>application-name</i> ]                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>                                                                                                                                       | Statement introduced in Junos OS Release 12.1 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                       |
| <b>Description</b>                                                                                                                                               | Two-octet field in an Ethernet frame that defines the protocol encapsulated in the frame payload. See <a href="http://standards.ieee.org/develop/regauth/ethertype/eth.txt">http://standards.ieee.org/develop/regauth/ethertype/eth.txt</a> for a list of Institute of Electrical and Electronics Engineers (IEEE) EtherTypes.                   |
| <div> <b>NOTE:</b> To create a FIP application, use the EtherType 0x8914.</div> |                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                                                                                                                                                   | <b>type</b> —Identifier for the EtherType.                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b>                                                                                                                                  | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                          |
| <b>Related Documentation</b>                                                                                                                                     | <ul style="list-style-type: none"><li>• <a href="#">Defining an Application for DCBX Application Protocol TLV Exchange on page 4604</a></li><li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li></ul> |



## fill-level

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>fill-level <i>low-value</i> fill-level <i>high-value</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service drop-profiles <i>profile-name</i> interpolate</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | When configuring random early detection (RED), map the fullness of a queue to a packet <a href="#">drop-probability</a> value. You configure the <b>fill-level</b> and <b>drop-probability</b> statements in related pairs by specifying a low <b>fill-level</b> value at which packets begin to drop (the drop probability is zero until the queue reaches this level of fullness) and a high <b>fill-level</b> value at which packets drop at the highest drop probability. As the queue fills from the low fill level to the high fill level, the rate of packet drop increases in a linear pattern from zero to the high drop probability. |
| <b>Options</b>                  | <p><b>low-value</b>—Fullness of the queue before packets begin to drop, expressed as a percentage. The low value must be less than the high value.</p> <p><b>Range:</b> 0 through 100</p> <p><b>high-value</b>—Fullness of the queue before it reaches the maximum drop probability. If the queue fills beyond the fill level high value, all packets drop. The high value must be greater than the low value.</p> <p><b>Range:</b> 0 through 100</p>                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Tail-Drop Profiles on page 5019</a></li> <li>• <a href="#">Understanding CoS Tail-Drop Profiles on page 4929</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                          |



## flow-control

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (flow-control   no-flow-control);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">ether-options</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Explicitly enable or disable symmetric Ethernet PAUSE flow control, which regulates the flow of packets from the switch to the remote side of the connection by pausing all traffic flows on a link during periods of network congestion. Symmetric flow control means that Ethernet PAUSE is enabled in both directions. The interface generates and sends Ethernet PAUSE messages when the receive buffers fill to a certain threshold and the interface responds to PAUSE messages received from the connected peer. By default, flow control is disabled.</p> <p>You can configure asymmetric flow control by including the <b>configured-flow-control</b> statement at the [edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">ether-options</a> hierarchy level. Symmetric flow control and asymmetric flow control are mutually exclusive features. If you attempt to configure both, the switch returns a commit error.</p> <div data-bbox="474 968 542 1035" data-label="Image"> </div> <div data-bbox="584 1010 1432 1173" data-label="Text"> <p><b>NOTE:</b> Ethernet PAUSE temporarily stops transmitting all traffic on a link when the buffers fill to a certain threshold. To temporarily pause traffic on individual “lanes” of traffic (each lane contains the traffic associated with a particular IEEE 802.1p code point, so there can be eight lanes of traffic on a link), use priority-based flow control (PFC).</p> <p>Ethernet PAUSE and PFC are mutually exclusive features, so you cannot configure both of them on the same interface. If you attempt to configure both Ethernet PAUSE and PFC on an interface, the switch returns a commit error.</p> </div> |
| <b>Default</b>                  | Flow control is disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">configured-flow-control on page 5191</a></li> <li>• <a href="#">Configuring Gigabit and 10-Gigabit Ethernet Interfaces on page 2029</a></li> <li>• <a href="#">Understanding CoS Flow Control (Ethernet PAUSE and PFC) on page 4476</a></li> <li>• <a href="#">Junos® OS Network Interfaces</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |



## flow-control-queue (Output Congestion Notification)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>flow-control-queue [ <i>queue</i>   <i>list-of-queues</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service congestion-notification-profile <i>profile-name</i> output ieee-802.1 code-point <i>code-point-bits</i></a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Specify one or more output queues to pause, to support priority-based flow control (PFC). The specified queues pause when the interface receives a PFC frame with a matching IEEE 802.1p code point.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Default</b>                  | <p>Queue 3 (mapped to the fcoe forwarding class) and queue 4 (mapped to the no-loss forwarding class) are programmed as flow control queues to pause. No other output queues are programmed to pause by default.</p> <p>If you configure flow control queues explicitly, only the queues that you specify are programmed to pause. The explicit flow control queue to pause configuration overrides the default setting, so the queues paused in the default configuration are no longer paused by default.</p> <p>For example, if you configure queue 2 as a flow control queue, then queue 2 pauses when congestion occurs, but queues 3 and 4 do not pause because they were not explicitly specified. To enable pause on output queues 2, 3, and 4, you must explicitly configure all three of the queues as flow control queues.</p> <p>The same behavior applies to the IEEE 802.1p code points (priorities) on which PFC is enabled. By default, priorities 3 (011) and 4 (100) are enabled for PFC pause. If you explicitly configure flow control queues to pause, you must also explicitly configure pause for each priority (code point) that you want to pause, because the explicit configuration overrides the default configuration.</p> |
| <b>Options</b>                  | <code>[ <i>queue</i>   <i>list-of-queues</i> ]</code> —The output queue or a list of output queues to pause.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring CoS PFC (Congestion Notification Profiles) on page 5145</a></li> <li>• <a href="#">Example: Configuring Two or More Lossless FCoE IEEE 802.1p Priorities on Different FCoE Transit Switch Interfaces on page 5065</a></li> <li>• <a href="#">Example: Configuring Two or More Lossless FCoE Priorities on the Same FCoE Transit Switch Interface on page 5056</a></li> <li>• <a href="#">Example: Configuring Lossless FCoE Traffic When the Converged Ethernet Network Does Not Use IEEE 802.1p Priority 3 for FCoE Traffic (FCoE Transit Switch) on page 5048</a></li> <li>• <a href="#">Example: Configuring Lossless IEEE 802.1p Priorities on Ethernet Interfaces for Multiple Applications (FCoE and iSCSI) on page 5078</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                          |



- [Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896](#)

## family fcoe

---

|                                 |                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>family fcoe {<br/>    oxid (enable   disable);<br/>}</pre>                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit forwarding-options hash-key]                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                                                                                                  |
| <b>Description</b>              | Configure whether or not to use the originator exchange identifier (OxID) field for hash control for FCoE traffic load balancing.                                                                                                  |
| <b>Options</b>                  | The statement is explained separately.                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Enabling and Disabling CoS OxID Hash Control on page 4589</a></li><li>• <a href="#">Understanding OxID Hash Control for FCoE Traffic Load Balancing on page 4447</a></li></ul> |




## forwarding-class

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                      | <pre>forwarding-class class-name {     loss-priority level {         code-points [ aliases ] [ bit-patterns ];     } }</pre>                                                                                                                                                                                                                                                                                                                                                                                     |
| Rewrite Rule Configuration  | <pre>forwarding-class class-name {     loss-priority level {         code-point [ aliases ] [ bit-patterns ];     } }</pre>                                                                                                                                                                                                                                                                                                                                                                                      |
| Scheduler Map Configuration | <pre>forwarding-class class-name {     scheduler scheduler-name; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Interface Configuration     | <pre>forwarding-class class-name;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Hierarchy Level             | <pre>[edit class-of-service classifiers (dscp   dscp-ipv6   ieee-802.1) classifier-name], [edit class-of-service rewrite-rules] (dscp   dscp-ipv6   ieee-802.1) rewrite-name], [edit class-of-service scheduler-maps map-name], [edit class-of-service interfaces interface-name unit logical-unit-number]</pre>                                                                                                                                                                                                 |
| Release Information         | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Description                 | Configure forwarding class name and option values (classifier configuration), map rewrite rules to forwarding classes (rewrite rules), map forwarding classes to schedulers (scheduler maps), or map forwarding classes to logical interfaces (interfaces).                                                                                                                                                                                                                                                      |
| Options                     | <p><b>class-name</b>—Name of the forwarding class.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                 |
| Required Privilege Level    | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                              |
| Related Documentation       | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Forwarding Classes on page 5024</a></li> <li>• <a href="#">Example: Configuring Queue Schedulers on page 5030</a></li> <li>• <a href="#">Defining CoS Rewrite Rules on page 5155</a></li> <li>• <a href="#">Understanding CoS Forwarding Classes on page 4860</a></li> <li>• <a href="#">Understanding CoS Rewrite Rules on page 4933</a></li> <li>• <a href="#">Understanding CoS Output Queue Schedulers on page 4876</a></li> </ul> |



## forwarding-class (Fibre Channel Interfaces)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>forwarding-class <i>lossless-forwarding-class-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>     | [edit <a href="#">class-of-service interfaces</a> <i>fibre-channel-interface-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b> | Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>         | <p>Configure a Layer 3 fixed classifier on a Fibre Channel (FC) interface. The fixed classifier places all traffic received from the FC network into the specified forwarding class. The forwarding class must be lossless. (That is, the forwarding class must be either the default <b>fcoe</b> or <b>no-loss</b> forwarding class, or the forwarding class must be configured with the <b>no-loss</b> drop attribute.) If you attempt to specify a lossy forwarding class, the system returns a commit error.</p> <p>FCoE networks typically use priority 3 (IEEE code point 011) for FCoE traffic. The QFX Series default configuration uses IEEE 802.1p priority 3 for FCoE traffic. If the IEEE 802.1p code point value that the Ethernet network uses for FCoE traffic is different than code point 3, you can rewrite the code point to the value used in your Ethernet (FCoE) network. The lossless forwarding class specified in the fixed classifier uses the <b>rewrite-value</b> statement as the IEEE 802.1p code point (priority) for FCoE traffic on the FCoE network.</p> <p>To rewrite the code point value, include the <b>rewrite-value input ieee code-point code-point-bits</b> statement at the [edit <a href="#">class-of-service interfaces</a> <i>fc-interface-name</i>] hierarchy level.</p>                                                                                                                              |
|                            | <div>  <p><b>NOTE:</b> If you are not using the default configuration (priority 3 for FCoE traffic), the lossless forwarding class specified in the FC interface fixed classifier must be mapped to the IEEE 802.1p code point specified in the rewrite value statement.</p> </div> <p>In order to avoid fate sharing (separate flows that affect each other's throughput), the code point (priority) used for the lossless forwarding class (the code point specified in the rewrite value statement) should be the only code point classified to that forwarding class (at the [edit <a href="#">class-of-service classifiers</a>] hierarchy level). For example, if the rewrite value uses code point 101 for lossless FCoE forwarding class <code>fcoe_fc1</code>, then in the classifier configuration attached to ingress Ethernet interfaces, code point 101 is the only code point that should be classified to the <code>fcoe_fc1</code> forwarding class. Now if you also attach a classifier to an interface that maps code point 110 to forwarding class <code>fcoe_fc1</code>, then congestion on priority 110 unfairly (and unintentionally) affects the FCoE traffic that uses priority 101. Both priorities 101 and 110 are classified into forwarding class <code>fcoe_fc1</code>, so the traffic from both priorities shares the same fate.</p> |
| <b>Options</b>             | <b><i>lossless-forwarding-class-name</i></b> —Name of the lossless forwarding class.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



|                                 |                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 5094</a></li> <li>• <a href="#">Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 4911</a></li> <li>• <a href="#">Understanding CoS Classifiers on page 4846</a></li> </ul> |

## forwarding-class (Host Outbound Traffic)

---

|                                 |                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>forwarding-class <i>class-name</i>;</code>                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit class-of-service <a href="#">host-outbound-traffic</a> ]                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                        |
| <b>Description</b>              | Define forwarding class name for outbound host traffic (traffic generated by the Routing Engine).                                                                                                                                                        |
| <b>Options</b>                  | <i>class-name</i> —Name of the forwarding class.                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Changing the Host Outbound Traffic Default Queue Mapping on page 5143</a></li> <li>• <a href="#">Understanding Host Routing Engine Outbound Traffic Queues and Defaults on page 4842</a></li> </ul> |



## forwarding-class-set (Node Device)

---

|                                 |                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>forwarding-class-set <i>forwarding-class-set-name</i> {<br/>    <code>output-traffic-control-profile</code> <i>profile-name</i>;<br/>}</code>                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit <code>class-of-service interfaces</code> <i>interface-name</i> ]                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                         |
| <b>Description</b>              | Apply a previously defined forwarding class set to an output traffic control profile.                                                                                                                                                                                                                                     |
| <b>Options</b>                  | <i>forwarding-class-set-name</i> —Name of the forwarding class set.<br><br>The remaining statement is explained separately.                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | <code>interfaces</code> —To view this statement in the configuration.<br><code>interface-control</code> —To add this statement to the configuration.                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring CoS Hierarchical Port Scheduling (ETS) on page 4962</a></li><li>• <a href="#">Assigning CoS Components to Interfaces on page 5157</a></li><li>• <a href="#">Understanding CoS Forwarding Class Sets (Priority Groups) on page 4865</a></li></ul> |

## forwarding-class-sets

---

|                                 |                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>forwarding-class-sets <i>forwarding-class-set-name</i> {<br/>    <code>class</code> <i>class-name</i>;<br/>}</code>                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit <code>class-of-service</code> ]                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Assign forwarding classes to forwarding class sets (priority groups).                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <i>forwarding-class-set-name</i> —Name of the forwarding class set.<br><br>The remaining statement is explained separately.                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | <code>interfaces</code> —To view this statement in the configuration.<br><code>interface-control</code> —To add this statement to the configuration.                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring CoS Hierarchical Port Scheduling (ETS) on page 4962</a></li><li>• <a href="#">Example: Configuring Forwarding Class Sets on page 5027</a></li><li>• <a href="#">Understanding CoS Forwarding Class Sets (Priority Groups) on page 4865</a></li></ul> |



## forwarding-classes

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>forwarding-classes {   class {     class-name {       queue-num queue-number &lt;no-loss&gt;;     }   } }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>     | [edit <a href="#">class-of-service</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b> | <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>No-loss option introduced in Junos OS Release 12.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>         | <p>Map one or more forwarding classes to a single queue. You can configure up to 12 forwarding classes (8 unicast forwarding classes on queues 0 through 7 and 4 multidestination forwarding classes on queues 8 through 11) and map them to queues. You can map multiple forwarding classes to a single queue using the <b>class</b> statement. All forwarding classes mapped to a particular queue must be of the same type, either unicast or multicast. You cannot mix unicast and multicast forwarding classes on the same queue.</p> <p>You cannot configure weighted random early detection (WRED) packet drop on forwarding classes configured with the no-loss packet drop attribute. Do not associate a drop profile with lossless forwarding classes.</p> |



**NOTE:** If you map more than one forwarding class to a queue, all of the forwarding classes mapped to the queue must have the same packet drop attribute (all of the forwarding classes must be lossy, or all of the forwarding classes mapped to a queue must be lossless).



**NOTE:** If you are using Junos OS Release 12.2, use the default forwarding-class-to-queue mapping for the lossless fcoe and no-loss forwarding classes. If you explicitly configure the lossless forwarding classes, the traffic mapped to those forwarding classes is treated as lossy (best effort) traffic and does *not* receive lossless treatment.

If you are using Junos OS Release 12.3 or later, the default configuration is the same as the default configuration for Junos OS Release 12.2, and the default behavior is the same (the fcoe and no-loss forwarding classes receive lossless treatment). However, if you explicitly configure lossless forwarding classes, you can configure up to six lossless forwarding classes by specifying the no-loss option. If you do not specify the no-loss option in an explicit forwarding class configuration, the forwarding class is lossy. For example, if





you explicitly configure the `fcoe` forwarding class and you do not include the `no-loss` option, the `fcoe` forwarding class is lossy, not lossless.

---

|                                 |                                                                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Options</b>                  | The statements are explained separately.                                                                                                                                                           |
| <b>Required Privilege Level</b> | <code>interfaces</code> —To view this statement in the configuration.<br><code>interface-control</code> —To add this statement to the configuration.                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Forwarding Classes on page 5024</a></li><li>• <a href="#">Understanding CoS Forwarding Classes on page 4860</a></li></ul> |



## guaranteed-rate

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>guaranteed-rate (rate  percent <i>percentage</i>);</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit <code>class-of-service traffic-control-profiles</code> <i>traffic-control-profile-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Configure a guaranteed minimum rate of transmission for a traffic control profile. The sum of the guaranteed rates of all of the forwarding class sets (priority groups) on a port should not exceed the total port bandwidth. The guaranteed rate also determines the amount of excess (extra) port bandwidth that the priority group (forwarding class set) can share. Extra port bandwidth is allocated among the priority groups on a port in proportion to the guaranteed rate of each priority group.                                                                                      |
|                                 | <div>  <p><b>NOTE:</b> You cannot configure a guaranteed rate for a forwarding class set (priority group) that includes strict-high priority queues. If the traffic control profile is for a forwarding class set that contains strict-high priority queues, do not configure a guaranteed rate.</p> </div>                                                                                                                                                                                                     |
| <b>Default</b>                  | If you do not specify a guaranteed rate, the guaranteed rate is zero (0) and there is no minimum guaranteed bandwidth.                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                                 | <div>  <p><b>NOTE:</b> If you do not configure a guaranteed rate for a traffic control profile, the queues that belong to any forwarding class set (priority group) that uses that traffic control profile cannot have a configured transmit rate. The result is that there is no minimum guaranteed bandwidth for those queues and that those queues can be starved during periods of congestion.</p> </div>                                                                                                 |
| <b>Options</b>                  | <p><b>percent <i>percentage</i></b>—Minimum percentage of transmission capacity allocated to the forwarding class set or logical interface.</p> <p><b>Range:</b> 1 through 100 percent</p> <p><b><i>rate</i></b>—Minimum transmission rate allocated to the forwarding class set or logical interface, in bits per second (bps). You can specify a value in bits per second either as a complete decimal number or as a decimal number followed by the abbreviation <b>k</b> (1000), <b>m</b> (1,000,000), or <b>g</b> (1,000,000,000).</p> <p><b>Range:</b> 1000 through 10,000,000,000 bps</p> |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                              |



- Related Documentation**
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
  - [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)
  - [Example: Configuring Minimum Guaranteed Output Bandwidth on page 5040](#)
  - [Understanding CoS Traffic Control Profiles on page 4886](#)
  - [output-traffic-control-profile on page 5237](#)

---

## host-outbound-traffic

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>host-outbound-traffic {<br/>    forwarding-class <i>class-name</i>;<br/>    dscp-code-point <i>code-point</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit class-of-service]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Allow queue selection for traffic generated by the Routing Engine (host). The selected queue must be configured properly. You can also configure specific DSCP code point bits for the type of service (ToS) field of the generated packets. This configuration does not affect transit packets or incoming packets. This is a global configuration that only affects packets originating on the Routing Engine. If you do not configure an output queue for host outbound traffic, the switch uses the default queue mapping. |
| <b>Options</b>                  | The statements are explained separately.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Changing the Host Outbound Traffic Default Queue Mapping on page 5143</a></li><li>• <a href="#">Understanding Host Routing Engine Outbound Traffic Queues and Defaults on page 4842</a></li></ul>                                                                                                                                                                                                                                                                          |



## ieee-802.1

|                                           |                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                                    | <pre> ieee-802.1 classifier-name {     import (classifier-name   default);     forwarding-class class-name {         loss-priority level {             code-points [ aliases ] [ bit-patterns ];         }     } } </pre>                                                                                                                                                    |
| Code-Point Alias Configuration            | <pre> ieee-802.1 alias-name bit-pattern; </pre>                                                                                                                                                                                                                                                                                                                              |
| Multidestination Classifier Configuration | <pre> ieee-802.1 classifier-name; </pre>                                                                                                                                                                                                                                                                                                                                     |
| Interface Classifier Association          | <pre> ieee-802.1 (classifier-name   default); </pre>                                                                                                                                                                                                                                                                                                                         |
| Rewrite Rule Configuration                | <pre> ieee-802.1 rewrite-name {     import (rewrite-name   default);     forwarding-class class-name {         loss-priority level {             code-point [ aliases ] [ bit-patterns ];         }     } } </pre>                                                                                                                                                           |
| Hierarchy Level                           | <pre> [edit class-of-service classifiers], [edit class-of-service code-point-aliases], [edit class-of-service multi-destination classifiers], [edit class-of-service interfaces interface-name unit logical-unit-number classifiers], [edit class-of-service interfaces interface-name unit logical-unit-number rewrite-rules], [edit class-of-service rewrite-rules] </pre> |
| Release Information                       | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                            |
| Description                               | Configure an IEEE 802.1 classifier, configure an IEEE 802.1 code-point alias, apply a fixed IEEE 802.1 classifier to an interface, or apply an IEEE-802.1 rewrite rule.                                                                                                                                                                                                      |
| Options                                   | <p><b>classifier-name</b>—Name of the classifier.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                              |
| Required Privilege Level                  | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                          |
| Related Documentation                     | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Unicast Classifiers on page 5014</a></li> <li>• <a href="#">Defining CoS Code-Point Aliases on page 5133</a></li> <li>• <a href="#">Defining CoS Rewrite Rules on page 5155</a></li> </ul>                                                                                                         |



- [Assigning CoS Components to Interfaces on page 5157](#)
- [Understanding CoS Classifiers on page 4846](#)
- [Understanding CoS Rewrite Rules on page 4933](#)

---

## ieee-802.1 (Fibre Channel Interfaces)

---

**Syntax**    `ieee-802.1 {  
                  code-point code-point-bits;  
                  }`

**Hierarchy Level**    [edit [class-of-service interfaces](#) *fibre-channel-interface-name* [rewrite-value](#) *input*]

**Description**    Configure the IEEE 802.1p code point value to which all traffic received from the Fibre Channel (FC) network on the specified FC interface is rewritten. After the code point value is rewritten, the interface forwards the traffic to the Ethernet (FCoE) network. This works in conjunction with configuring a fixed classifier on the FC interface. The fixed classifier maps all traffic from the FC network into one lossless forwarding class (the lossless forwarding class must be mapped to the code point specified in the rewrite value). Traffic mapped to the lossless forwarding class uses the IEEE 802.1p priority specified by the code point bits in the rewrite value.

FCoE networks typically use priority 3 (IEEE code point 011) for FCoE traffic. The QFX Series default configuration uses IEEE 802.1p priority 3 for FCoE traffic. Rewriting the code point value enables you to change the IEEE 802.1p priority of the FCoE traffic if the Ethernet network uses a different priority than priority 3 (code point 011).

The system supports only one IEEE 802.1p code point value per FC interface. You cannot configure more than one IEEE 802.1p rewrite value per FC interface. In addition, you can specify only one rewrite value per local FCoE-FC gateway fabric; all interfaces in the local fabric must use the same rewrite value. Attempting to configure FC interfaces in the same local fabric with different rewrite values generates a commit error. You can specify different rewrite values for interfaces that belong to different local FCoE-FC gateway fabrics.

The statement is described separately.

**Required Privilege Level**    interfaces—To view this statement in the configuration.  
                                  interface-control—To add this statement to the configuration.

**Related Documentation**    • [forwarding-class \(Fibre Channel Interfaces\) on page 5212](#)  
                                  • [Example: Configuring IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 5094](#)  
                                  • [Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 4911](#)  
                                  • [Understanding CoS Classifiers on page 4846](#)



## ieee-802.1 (Input Congestion Notification)

|                                 |                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> ieee-802.1 {   code-point [code-point-bits] {     pfc {       mru mru-value;     }   } } </pre>                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service congestion-notification-profile</a> <i>profile-name</i> <a href="#">input</a> ]                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Configure an IEEE 802.1 code point and apply priority-based flow control (PFC) to packets with that code point.                                                                                                                                                                                                               |
| <b>Options</b>                  | The statements are described separately.                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS PFC for FCoE Traffic on page 4509</a></li> <li>• <a href="#">Configuring CoS PFC (Congestion Notification Profiles) on page 5145</a></li> <li>• <a href="#">Understanding CoS Flow Control (Ethernet PAUSE and PFC) on page 4476</a></li> </ul> |



## ieee-802.1 (Output Congestion Notification)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>ieee-802.1 {<br/>    code-point [ code-point-bits ] {<br/>        flow-control-queue [ queue   list-of-queues ];<br/>    }<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit <b>class-of-service congestion-notification-profile</b> <i>profile-name</i> <b>output</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | Configure an IEEE 802.1 code point and apply priority-based flow control (PFC) to packets with that code point on output queues.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>                  | The statements are described separately.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring CoS PFC (Congestion Notification Profiles) on page 5145</a></li><li>• <a href="#">Example: Configuring Two or More Lossless FCoE IEEE 802.1p Priorities on Different FCoE Transit Switch Interfaces on page 5065</a></li><li>• <a href="#">Example: Configuring Two or More Lossless FCoE Priorities on the Same FCoE Transit Switch Interface on page 5056</a></li><li>• <a href="#">Example: Configuring Lossless FCoE Traffic When the Converged Ethernet Network Does Not Use IEEE 802.1p Priority 3 for FCoE Traffic (FCoE Transit Switch) on page 5048</a></li><li>• <a href="#">Example: Configuring Lossless IEEE 802.1p Priorities on Ethernet Interfaces for Multiple Applications (FCoE and iSCSI) on page 5078</a></li><li>• <a href="#">Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896</a></li></ul> |




## import

---

|                                 |                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>import (<i>import</i>   default);</code>                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service classifiers</a> ( <a href="#">dscp</a>   <a href="#">dscp-ipv6</a>   <a href="#">ieee-802.1</a> ) <i>classifier-name</i> ],<br>[edit <a href="#">class-of-service rewrite-rules</a> ( <a href="#">dscp</a>   <a href="#">dscp-ipv6</a>   <a href="#">ieee-802.1</a> ) <i>classifier-name</i> ]          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Specify a default or previously defined classifier.                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <p><b><i>import</i></b>—Name of the classifier mapping configured at the <a href="#">[edit class-of-service classifiers]</a> hierarchy level.</p> <p><b>default</b>—Default classifier mapping.</p> <p>The remaining statements are explained separately.</p>                                                                              |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Unicast Classifiers on page 5014</a></li> <li>• <a href="#">Defining CoS Rewrite Rules on page 5155</a></li> <li>• <a href="#">Understanding CoS Classifiers on page 4846</a></li> <li>• <a href="#">Understanding CoS Rewrite Rules on page 4933</a></li> </ul> |



## ingress (Buffer Configuration)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>ingress {   <b>buffer-partition</b> (lossless   lossless-headroom   lossy) {     percent <i>percent</i>;   }   percent <i>percent</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit <b>class-of-service shared-buffer</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | <p>Configure the global shared buffer pool allocation for ingress traffic. The system allocates the shared buffer pool dynamically across its ports as the ports require memory space. Some buffer space is reserved for buffers such as dedicated buffers (buffers allocated permanently to ports) and headroom buffers (buffers that help prevent packet loss on lossless flows).</p> <p>The percentage you specify is the percentage of available (user-configurable) buffer space allocated to the global shared ingress buffer pool. If you allocate less than 100 percent of the available buffer space to the shared buffer pool, the remaining buffer space is added to the dedicated buffer pool. (You cannot directly configure the dedicated buffer pool for each port; dedicated buffers are allocated evenly across all the ports.)</p> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 10px;">  <p><b>CAUTION:</b> Changing the buffer configuration is a disruptive event. Traffic stops on <i>all</i> ports until buffer reprogramming is complete.</p> </div> <p>You can also partition the shared buffer pool to adjust the ingress buffer allocations for different mixes of network traffic using the <b>buffer-partition</b> statement.</p> |
| <b>Default</b>                  | The default shared buffer percentage is 100 percent. (All available buffer space is allocated to the shared buffer pool.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <p><b>percent <i>percent</i></b>—Percentage of available ingress buffer space allocated to the shared buffer pool. If the percentage is less than 100 percent, the remaining buffer space is allocated to the dedicated buffer pool.</p> <p>The remaining statement is explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Best-Effort Unicast Traffic on page 5103</a></li> <li>• <a href="#">Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Multicast Traffic on page 5109</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



- [Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Lossless Traffic on page 5114](#)
- [Configuring Global Ingress and Egress Shared Buffers on page 5153](#)
- [Understanding CoS Buffer Configuration on page 4914](#)

## input (Congestion Notification)

**Syntax**

```
input {
  ieee-802.1 {
    code-point [code-point-bits] {
      pfc {
        mru mru-value;
      }
    }
  }
  cable-length cable-length-value;
}
```

**Hierarchy Level** [edit [class-of-service congestion-notification-profile](#) *profile-name*]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure priority-based flow control (PFC) on incoming traffic.

**Options** The remaining statements are explained separately.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)
- [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)



## input (Fibre Channel Interfaces)

---

**Syntax**

```
input {  
    ieee-802.1p {  
        code-point code-point-bits;  
    }  
}
```

**Hierarchy Level** [edit [class-of-service interfaces](#) *fibre-channel-interface-name* [rewrite-value](#)]

**Description** Configure the IEEE 802.1p code point value to which all traffic received from the Fibre Channel (FC) network on the specified FC interface is rewritten. After the code point value is rewritten, the interface forwards the traffic to the Ethernet (FCoE) network. This works in conjunction with configuring a fixed classifier on the FC interface. The fixed classifier maps all traffic from the FC network into one lossless forwarding class (the lossless forwarding class must be mapped to the code point specified in the rewrite value). Traffic mapped to the lossless forwarding class uses the IEEE 802.1p priority specified by the code point bits in the rewrite value.

FCoE networks typically use priority 3 (IEEE code point 011) for FCoE traffic. The QFX Series default configuration uses IEEE 802.1p priority 3 for FCoE traffic. Rewriting the code point value enables you to change the IEEE 802.1p priority of the FCoE traffic if the Ethernet network uses a different priority than priority 3 (code point 011).

The system supports only one IEEE 802.1p code point value per FC interface. You cannot configure more than one IEEE 802.1p rewrite value per FC interface. In addition, you can specify only one rewrite value per local FCoE-FC gateway fabric; all interfaces in the local fabric must use the same rewrite value. Attempting to configure FC interfaces in the same local fabric with different rewrite values generates a commit error. You can specify different rewrite values for interfaces that belong to different local FCoE-FC gateway fabrics.

The statements are described separately.

**Required Privilege Level** interfaces—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [forwarding-class \(Fibre Channel Interfaces\) on page 5212](#)
- [Example: Configuring IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 5094](#)
- [Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 4911](#)
- [Understanding CoS Classifiers on page 4846](#)



## interface (DCBX)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> interface (<i>interface-name</i>   all) {   disable;   application-map <i>application-map-name</i>;   applications {     no-auto-negotiation;   }   enhanced-transmission-selection {     no-auto-negotiation;     recommendation-tlv {       no-auto-negotiation;     }   }   mode (auto-negotiate   ieee-dcbx   dcbx-version-1.01);   priority-flow-control {     no-auto-negotiation;   } } </pre>                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit <a href="#">protocols dcbx</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 11.3 for the EX Series switches.</p> <p><b>Mode</b> and <b>recommendation-tlv</b> statements introduced in Junos OS Release 12.2 for the QFX Series.</p>                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Configure DCBX properties on an interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Options</b>                  | <p><b><i>interface-name</i></b>—Name of the interface.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show dcbx neighbors on page 4694</a></li> <li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li> <li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li> <li>• <a href="#">Understanding DCB Features and Requirements on page 4389</a></li> <li>• <a href="#">Understanding DCB Features and Requirements on EX Series Switches</a></li> <li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li> </ul> |



## interfaces (Class of Service)

```
Syntax interfaces {
    interface-name {
        congestion-notification-profile profile-name {
        }
        forwarding-class lossless-forwarding-class-name;
        forwarding-class-set forwarding-class-set-name {
            output-traffic-control-profile profile-name;
        }
        rewrite-value {
            input {
                ieee-802.1 {
                    code-point code-point-bits;
                }
            }
        }
    }
    unit logical-unit-number {
        classifiers {
            (dscp | dscp-ipv6 | ieee-802.1) (classifier-name | default);
        }
        forwarding-class class-name;
        rewrite-rules {
            (dscp | dscp-ipv6 | ieee-802.1) (classifier-name | default);
        }
    }
}
```

**Hierarchy Level** [edit [class-of-service](#)]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure interface-specific CoS properties for incoming packets.

**Options** *interface-name*—Name of the interface.

The statements are explained separately.

**Required Privilege Level** interfaces—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring Unicast Classifiers on page 5014](#)
- [Example: Configuring Forwarding Classes on page 5024](#)
- [Example: Configuring Forwarding Class Sets on page 5027](#)
- [Example: Configuring Traffic Control Profiles \(Priority Group Scheduling\) on page 5037](#)
- [Assigning CoS Components to Interfaces on page 5157](#)
- [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
- [Defining CoS Rewrite Rules on page 5155](#)



- [Interfaces Overview on page 1911](#)

## interpolate

---

|                                 |                                                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>interpolate {   fill-level <i>low-value</i> fill-level <i>high-value</i>;   drop-probability 0 drop-probability <i>high-value</i>; }</pre>                                                       |
| <b>Hierarchy Level</b>          | [edit class-of-service <b>drop-profiles</b> <i>profile-name</i> ]                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                     |
| <b>Description</b>              | <p>Specify values for interpolating the relationship between queue fill level and drop probability.</p> <p>The statements are explained separately.</p>                                               |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Tail-Drop Profiles on page 5019</a></li> <li>• <a href="#">Understanding CoS Tail-Drop Profiles on page 4929</a></li> </ul> |



## loss-priority (Classifiers)

---

|                                 |                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>loss-priority <i>level</i> {<br/>    <i>code-points</i> [ <i>aliases</i> ] [ <i>bit-patterns</i> ];<br/>}</code>                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service classifiers</a> ( <a href="#">dscp</a>   <a href="#">dscp-ipv6</a>   <a href="#">ieee-802.1</a> ) <i>classifier-name</i><br><a href="#">forwarding-class</a> <i>class-name</i> ]                                                                                                         |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Configure packet loss priority value for a specific set of code-point aliases and bit patterns.                                                                                                                                                                                                                             |
| <b>Options</b>                  | <p><i>level</i>—Can be one of the following:</p> <ul style="list-style-type: none"><li>• <b>low</b>—Packet has low loss priority.</li><li>• <b>medium-high</b>—Packet has medium-high loss priority.</li><li>• <b>high</b>—Packet has high loss priority.</li></ul> <p>The remaining statement is explained separately.</p> |
| <b>Required Privilege Level</b> | <p><a href="#">interfaces</a>—To view this statement in the configuration.</p> <p><a href="#">interface-control</a>—To add this statement to the configuration.</p>                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Unicast Classifiers on page 5014</a></li><li>• <a href="#">Understanding CoS Classifiers on page 4846</a></li></ul>                                                                                                                                |



## loss-priority (Drop Profiles)

---

|                                 |                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>loss-priority <i>level</i> <i>protocol protocol</i> drop-profile <i>profile-name</i>;</code>                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service schedulers scheduler-name drop-profile-map</a> ]                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | Configure packet loss priority value for a drop profile mapped to a system drop profile.                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <p><i>level</i>—Can be one of the following:</p> <ul style="list-style-type: none"> <li>• <b>low</b>—Packet has low loss priority.</li> <li>• <b>medium-high</b>—Packet has medium-high loss priority.</li> <li>• <b>high</b>—Packet has high loss priority.</li> </ul> <p>The remaining statements are explained separately.</p> |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Drop Profile Maps on page 5022</a></li> <li>• <a href="#">Example: Configuring Tail-Drop Profiles on page 5019</a></li> <li>• <a href="#">Understanding CoS Tail-Drop Profiles on page 4929</a></li> </ul>                                              |



## loss-priority (Rewrite Rules)

---

|                                 |                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>loss-priority <i>level</i> {<br/>    <i>code-point</i> (<i>alias</i>   <i>bit-pattern</i>);<br/>}</code>                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit <code>class-of-service rewrite-rules</code> ( <code>dscp</code>   <code>dscp-ipv6</code>   <code>ieee-802.1</code> ) <i>rewrite-name</i><br><i>forwarding-class</i> <i>class-name</i> ]                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Specify a loss priority to which to apply a rewrite rule. The rewrite rule sets the code-point aliases and bit patterns for a specific forwarding class and loss priority. Packets that match the forwarding class and loss priority are rewritten with the rewrite code-point alias or bit pattern.                        |
| <b>Options</b>                  | <p><i>level</i>—Can be one of the following:</p> <ul style="list-style-type: none"><li>• <b>low</b>—Packet has low loss priority.</li><li>• <b>medium-high</b>—Packet has medium-high loss priority.</li><li>• <b>high</b>—Packet has high loss priority.</li></ul> <p>The remaining statement is explained separately.</p> |
| <b>Required Privilege Level</b> | <p><code>interfaces</code>—To view this statement in the configuration.</p> <p><code>interface-control</code>—To add this statement to the configuration.</p>                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Defining CoS Rewrite Rules on page 5155</a></li><li>• <a href="#">Understanding CoS Rewrite Rules on page 4933</a></li></ul>                                                                                                                                            |



---

## multi-destination

---

|                                 |                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>multi-destination {<br/>  classifiers {<br/>    (dscp   ieee-802.1) classifier-name;<br/>  }<br/>}</pre>                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service</a> ]                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                               |
| <b>Description</b>              | Define a multicast CoS behavior aggregate (BA) classifier.                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | The statements are explained separately.                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | interfaces—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Multidestination (Multicast, Broadcast, DLF) Classifiers on page 5017</a></li><li>• <a href="#">Assigning CoS Components to Interfaces on page 5157</a></li><li>• <a href="#">Understanding CoS Classifiers on page 4846</a></li></ul> |




## mode (DCBX)

---

|                                 |                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>mode (auto-negotiate   ieee-dcbx   dcbx-version-1.01);</code>                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit <a href="#">protocols dcbx interface</a> (all   <i>interface-name</i> )]                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | <p>Set the DCBX mode for the specified interface or interfaces.</p> <p>QFX3500 switches come up in IEEE DCBX mode and then autonegotiate with the connected peer to set the DCBX mode.</p> <p>QFabric system Node devices come up in version 1.01 DCBX mode and then autonegotiate with the connected peer to set the DCBX mode.</p> |
| <b>Default</b>                  | The default DCBX mode is autonegotiation.                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b>auto-negotiate</b>—Automatically negotiate the DCBX mode with the connected peer.</p> <p><b>ieee-dcbx</b>—Force the interface to use IEEE DCBX mode, regardless of the peer configuration.</p> <p><b>dcbx-version-1.01</b>—Force the interface to use version 1.01 DCBX mode, regardless of the peer configuration.</p>        |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show dcbx neighbors on page 4694</a></li><li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li><li>• <a href="#">Understanding DCBX on page 4463</a></li></ul>                                                                                                 |



## mru

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>mru mru-value;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service congestion-notification-profile profile-name input ieee-802.1 code-point code-point-bits pfc</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Configure the maximum receive unit (MRU) of the interface in bytes (incoming packet sizes must be less than or equal to the MRU, or the packets are dropped). The system uses the MRU and the cable length to calculate the amount of buffer headroom reserved to support priority-based flow control (PFC). The lower the MRU and the shorter the cable length, the less headroom buffer space is required for PFC.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|                                 | <div>  <p><b>NOTE:</b> You can also set a maximum transmission unit (MTU) value (the largest packet size the interface sends) for interfaces by including the <code>mtu</code> statement at the [edit <a href="#">interfaces interface-name</a>] hierarchy level.</p> </div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Default</b>                  | <p>For priority 3 traffic, the default MRU value is 2500 bytes.</p> <p>For priority 4 traffic, the default MRU value is 9612 bytes.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>                  | <b>mru-value</b> —Value of the maximum packet receive unit size in bytes (generally from 1500 to 9216 bytes, but there is no configuration restriction).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring CoS PFC (Congestion Notification Profiles) on page 5145</a></li> <li>• <a href="#">Example: Configuring Two or More Lossless FCoE IEEE 802.1p Priorities on Different FCoE Transit Switch Interfaces on page 5065</a></li> <li>• <a href="#">Example: Configuring Two or More Lossless FCoE Priorities on the Same FCoE Transit Switch Interface on page 5056</a></li> <li>• <a href="#">Example: Configuring Lossless FCoE Traffic When the Converged Ethernet Network Does Not Use IEEE 802.1p Priority 3 for FCoE Traffic (FCoE Transit Switch) on page 5048</a></li> <li>• <a href="#">Example: Configuring Lossless IEEE 802.1p Priorities on Ethernet Interfaces for Multiple Applications (FCoE and iSCSI) on page 5078</a></li> <li>• <a href="#">Understanding CoS Flow Control (Ethernet PAUSE and PFC) on page 4476</a></li> <li>• <a href="#">Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896</a></li> </ul> |



## output (Congestion Notification)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>output {<br/>    ieee-802.1 {<br/>        code-point [code-point-bits] {<br/>            flow-control-queue [queue   list-of-queues];<br/>        }<br/>    }<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit <b>class-of-service congestion-notification-profile</b> <i>profile-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | Configure priority-based flow control (PFC) on output queues.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | The remaining statements are explained separately.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring CoS PFC (Congestion Notification Profiles) on page 5145</a></li><li>• <a href="#">Example: Configuring Two or More Lossless FCoE IEEE 802.1p Priorities on Different FCoE Transit Switch Interfaces on page 5065</a></li><li>• <a href="#">Example: Configuring Two or More Lossless FCoE Priorities on the Same FCoE Transit Switch Interface on page 5056</a></li><li>• <a href="#">Example: Configuring Lossless FCoE Traffic When the Converged Ethernet Network Does Not Use IEEE 802.1p Priority 3 for FCoE Traffic (FCoE Transit Switch) on page 5048</a></li><li>• <a href="#">Example: Configuring Lossless IEEE 802.1p Priorities on Ethernet Interfaces for Multiple Applications (FCoE and iSCSI) on page 5078</a></li><li>• <a href="#">Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896</a></li></ul> |



## output-traffic-control-profile

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>output-traffic-control-profile <i>profile-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service interfaces</a> <i>interface-name</i> <a href="#">forwarding-class-set</a> <i>forwarding-class-set-name</i> ]                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Apply an output traffic scheduling and shaping profile to a forwarding class set (priority group).                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <i>profile-name</i> —Name of the traffic-control profile to apply to the specified forwarding class set.                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | interfaces—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS Hierarchical Port Scheduling (ETS) on page 4962</a></li> <li>• <a href="#">Example: Configuring Traffic Control Profiles (Priority Group Scheduling) on page 5037</a></li> <li>• <a href="#">Assigning CoS Components to Interfaces on page 5157</a></li> <li>• <a href="#">Understanding CoS Traffic Control Profiles on page 4886</a></li> </ul> |



## pfc (Input Congestion Notification)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>pfc {<br/>    <b>mru</b> <i>mru-value</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit <b>class-of-service</b> <b>congestion-notification-profile</b> <i>profile-name</i> <b>input</b> <b>ieee-802.1</b> <b>code-point</b> <i>code-point-bits</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | Enable and configure ingress interface priority-based flow control (PFC).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | The remaining statement is explained separately.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | <b>interfaces</b> —To view this statement in the configuration.<br><b>interface-control</b> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring CoS PFC (Congestion Notification Profiles) on page 5145</a></li><li>• <a href="#">Example: Configuring Two or More Lossless FCoE IEEE 802.1p Priorities on Different FCoE Transit Switch Interfaces on page 5065</a></li><li>• <a href="#">Example: Configuring Two or More Lossless FCoE Priorities on the Same FCoE Transit Switch Interface on page 5056</a></li><li>• <a href="#">Example: Configuring Lossless FCoE Traffic When the Converged Ethernet Network Does Not Use IEEE 802.1p Priority 3 for FCoE Traffic (FCoE Transit Switch) on page 5048</a></li><li>• <a href="#">Example: Configuring Lossless IEEE 802.1p Priorities on Ethernet Interfaces for Multiple Applications (FCoE and iSCSI) on page 5078</a></li><li>• <a href="#">Understanding CoS Flow Control (Ethernet PAUSE and PFC) on page 4476</a></li><li>• <a href="#">Understanding CoS IEEE 802.1p Priorities for Lossless Traffic Flows on page 4896</a></li></ul> |



## policy-options

```
Syntax  policy-options
        application-maps application-map-name {
            application application-name {
                code-points [ aliases ] [ bit-patterns ];
            }
        }
        policy-statement policy-name {
            term term-name {
                from {
                    family family-name;
                    match-conditions;
                    policy subroutine-policy-name;
                    prefix-list prefix-list-name;
                    prefix-list-filter prefix-list-name match-type <actions>;
                    route-filter destination-prefix match-type <actions>;
                    source-address-filter source-prefix match-type <actions>;
                }
                to {
                    match-conditions;
                    policy subroutine-policy-name;
                }
                then actions;
            }
        }
    }
```

**Hierarchy Level** [edit]

**Release Information** Statement introduced in Junos OS Release 12.1 for the QFX Series.  
Statement introduced in Junos OS Release 12.1 for the EX Series.

**Description** Configure options such as application maps for DCBX application protocol exchange and policy statements.

**Required Privilege Level** storage—To view this statement in the configuration.  
storage-control—To add this statement to the configuration.

**Related Documentation**

- [Defining an Application for DCBX Application Protocol TLV Exchange on page 4604](#)
- [Example: Configuring DCBX Application Protocol TLV Exchange on page 4540](#)
- [Example: Configuring DCBX to Support an iSCSI Application](#)
- [Understanding DCBX Application Protocol TLV Exchange on page 4472](#)
- [Understanding DCBX Application Protocol TLV Exchange on EX Series Switches](#)



## priority (Schedulers)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>priority <i>priority</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service schedulers</a> <i>scheduler-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Specify the packet-scheduling drop priority value.                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <p><i>priority</i>—It can be one of the following:</p> <ul style="list-style-type: none"><li>• <b>low</b>—Scheduler has low priority.</li><li>• <b>strict-high</b>—Scheduler has strict high priority. You can configure only one queue as a strict-high priority queue. Strict-high priority allocates the scheduled bandwidth to the queue before any other queue receives bandwidth. Other queues receive the bandwidth that remains after the strict-high queue has been serviced.</li></ul> |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring CoS Hierarchical Port Scheduling (ETS) on page 4962</a></li><li>• <a href="#">Example: Configuring Queue Schedulers on page 5030</a></li><li>• <a href="#">Understanding CoS Output Queue Schedulers on page 4876</a></li></ul>                                                                                                                                                                                         |



## priority-flow-control


---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>priority-flow-control {<br/>    no-auto-negotiation;<br/>}</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit <a href="#">protocols dcbx interface</a> (all   <i>interface-name</i> )]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>Statement introduced in Junos OS Release 11.3 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Disable autonegotiation of priority-based flow control (PFC) on one or more Ethernet interfaces. Autonegotiation enables PFC on an interface only if the switch and the peer device connected to the switch both support PFC and have the same PFC configuration. Disabling autonegotiation on an interface forces the interface to use the PFC state (enabled or disabled) that is configured on the switch by the configuration and assignment of the congestion notification profile.                                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <b>no-auto-negotiation</b> —Disable automatic negotiation of PFC.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show dcbx neighbors on page 4694</a></li> <li>• <a href="#">Configuring CoS PFC (Congestion Notification Profiles) on page 5145</a></li> <li>• <a href="#">Configuring Priority-Based Flow Control for an EX Series Switch (CLI Procedure)</a></li> <li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li> <li>• <a href="#">Example: Configuring CoS PFC for FCoE Traffic on page 4509</a></li> <li>• <a href="#">Understanding Data Center Bridging Capability Exchange Protocol for EX Series Switches</a></li> <li>• <a href="#">Understanding Priority-Based Flow Control</a></li> <li>• <a href="#">Understanding DCB Features and Requirements on page 4389</a></li> </ul> |



## protocol (Applications)

---

|                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                          | <code>protocol (tcp   udp);</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>                                                                                                                                                                                                 | [edit applications <a href="#">application</a> <i>application-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>                                                                                                                                                                                             | Statement introduced in Junos OS Release 12.1 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>                                                                                                                                                                                                     | Networking protocol type, which combines with <b>destination-port</b> to identify an application type.                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <div> <b>NOTE:</b> To create an application for iSCSI, use the protocol <code>tcp</code> with the destination port number 3260.</div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                                                                                                                                                                                                         | <code>tcp</code> —Transmission Control Protocol<br><br><code>udp</code> —User Datagram Protocol                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b>                                                                                                                                                                                        | <code>interface</code> —To view this statement in the configuration.<br><code>interface-control</code> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>                                                                                                                                                                                           | <ul style="list-style-type: none"><li>• <a href="#">Defining an Application for DCBX Application Protocol TLV Exchange on page 4604</a></li><li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li><li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on page 4472</a></li><li>• <a href="#">Understanding DCBX Application Protocol TLV Exchange on EX Series Switches</a></li></ul> |



## protocol (Drop Profile Map)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>protocol <i>protocol</i> <b>drop-profile</b> <i>profile-name</i>;</code>                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit <b>class-of-service</b> <b>schedulers</b> <i>scheduler-name</i> <b>drop-profile-map</b> <b>loss-priority</b> (low   medium-high   high)]                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | Configure the protocol type for the specified drop profile.                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <p><b><i>protocol</i></b>—Type of protocol. The protocol can be:</p> <ul style="list-style-type: none"> <li><b>any</b>—Accept any protocol type.</li> </ul> <p>The remaining statement is explained separately.</p>                                                                                                                                                                      |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS Hierarchical Port Scheduling (ETS) on page 4962</a></li> <li>• <a href="#">Example: Configuring Drop Profile Maps on page 5022</a></li> <li>• <a href="#">Example: Configuring Tail-Drop Profiles on page 5019</a></li> <li>• <a href="#">Understanding CoS Tail-Drop Profiles on page 4929</a></li> </ul> |



## queue-num

|                            |                                                                                                                                             |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>queue-num <i>queue-number</i> &lt;no-loss&gt;;</code>                                                                                 |
| <b>Hierarchy Level</b>     | [edit <code>class-of-service forwarding-classes class <i>class-name</i></code> ]                                                            |
| <b>Release Information</b> | Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>No-loss option introduced in Junos OS Release 12.3 for the QFX Series. |
| <b>Description</b>         | Map a forwarding class to an output queue number. Optionally, configure the forwarding class as a lossless forwarding class.                |

You can map some or all of the eight unicast forwarding classes to a unicast queue (0 through 7) or some or all of the four multdestination (multicast, broadcast, destination lookup fail) forwarding classes to the same multdestination queue (8 through 11), providing that you do not map one forwarding class to more than one queue. The queue to which you map a forwarding class determines if the forwarding class is a unicast or multdestination forwarding class.

You cannot configure weighted random early detection (WRED) packet drop on forwarding classes configured with the no-loss packet drop attribute. Do not associate a drop profile with lossless forwarding classes.



**NOTE:** If you map more than one forwarding class to a queue, all of the forwarding classes mapped to the queue must have the same packet drop attribute (all of the forwarding classes must be lossy, or all of the forwarding classes mapped to a queue must be lossless).



**NOTE:** If you are using Junos OS Release 12.2, use the default forwarding-class-to-queue mapping for the lossless fcoe and no-loss forwarding classes. If you explicitly configure lossless forwarding classes, the traffic mapped to those forwarding classes is treated as lossy (best effort) traffic and does *not* receive lossless treatment.

If you are using Junos OS Release 12.3 or later, the default configuration is the same as the default configuration for Junos OS Release 12.2, and the default behavior is the same (the fcoe and no-loss forwarding classes receive lossless treatment). However, if you explicitly configure lossless forwarding classes, you can configure up to six lossless forwarding classes by specifying the no-loss option. If you do not specify the no-loss option in an explicit forwarding class configuration, the forwarding class is lossy. For example, if you explicitly configure the fcoe forwarding class and you do not include the no-loss option, the fcoe forwarding class is lossy, not lossless.



|                                 |                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Options</b>                  | <p><b>queue-number</b>—Number of the CoS unicast queue (0 through 7) or the CoS multidestination queue (8 through 11).</p> <p><b>no-loss</b>—Optional packet drop attribute keyword to configure the forwarding class as lossless.</p> |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Forwarding Classes on page 5024</a></li> <li>• <a href="#">Understanding CoS Forwarding Classes on page 4860</a></li> </ul>                                  |

## recommendation-tlv

|                                 |                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>recommendation-tlv {     no-auto-negotiation; }</pre>                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit <a href="#">protocols dcbx interface interface-name enhanced-transmission-selection</a> ]                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Disable or enable DCBX to send the ETS Recommendation TLV (also known as the Information TLV) on egress. This feature is valid only if the interface DCBX mode is IEEE DCBX. If the interface DCBX mode is DCBX version 1.01, this statement has no effect. (DCBX version 1.01 does not advertise separate TLVs for individual attributes.) |
| <b>Default</b>                  | DCBX-enabled interfaces send the ETS recommendation TLV unless it is disabled.                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <b>no-auto-negotiation</b> —Disable sending of the ETS recommendation TLV.                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show dcbx neighbors on page 4694</a></li> <li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li> </ul>                                                                                                                                                               |



## rewrite-rules

---

|                                 |                                                                                                                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>rewrite-rules {<br/>  (dscp   dscp-ipv6   ieee-802.1) rewrite-name {<br/>    import (rewrite-name   default);<br/>    forwarding-class class-name {<br/>      loss-priority priority code-point (alias   bits);<br/>    }<br/>  }<br/>}</pre> |
| <b>Interface Association</b>    | <pre>rewrite-rules {<br/>  (dscp   dscp-ipv6   ieee-802.1) rewrite-name;<br/>}</pre>                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service</a> ],<br>[edit <a href="#">class-of-service interfaces</a> <i>interface-name</i> <a href="#">unit</a> <i>logical-unit-number</i> ]                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                  |
| <b>Description</b>              | Configure rewrite rules that map traffic to code points when traffic exits the system, and apply the rewrite rules to a specific interface.                                                                                                        |
| <b>Options</b>                  | The statements are explained separately.                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Defining CoS Rewrite Rules on page 5155</a></li><li>• <a href="#">Understanding CoS Rewrite Rules on page 4933</a></li></ul>                                                                   |



## rewrite-value (Fibre Channel Interfaces)

```
Syntax  rewrite-value {
        input {
            ieee-802.1p {
                code-point code-point-bits;
            }
        }
    }
```

**Hierarchy Level** [edit [class-of-service interfaces](#) *fibre-channel-interface-name*]

**Description** Configure the IEEE 802.1p code point value (priority) for all traffic received from the Fibre Channel (FC) network on the specified FC interface. Instead of using the default priority 3 (011) for FCoE traffic, the priority is rewritten to the specified priority before being forwarded. This works in conjunction with configuring a fixed classifier on the FC interface. The fixed classifier maps all traffic from the FC network into one lossless forwarding class (the lossless forwarding class must be mapped to the code point specified in the rewrite value). Traffic mapped to the lossless forwarding class uses the IEEE 802.1p priority specified by the code point bits in the rewrite value.

FCoE traffic typically uses priority 3 (IEEE code point 011). The QFX Series default configuration uses IEEE 802.1p priority 3 for FCoE traffic. Rewriting the code point value enables you to change the IEEE 802.1p priority of the FCoE traffic if the Ethernet network uses a different priority than priority 3 (code point 011) for FCoE traffic.

The system supports only one IEEE 802.1p code point value per FC interface, so you cannot configure more than one IEEE 802.1p rewrite value per FC interface. In addition, you can specify only one rewrite value per local FCoE-FC gateway fabric; all interfaces in the local fabric must use the same rewrite value. Attempting to configure FC interfaces in the same local fabric with different rewrite values generates a commit error. You can specify different rewrite values for interfaces that belong to different local FCoE-FC gateway fabrics.



**NOTE:** In order to avoid fate sharing (separate flows that affect each others' throughput), the code point used for the rewrite value should be the only code point used for the lossless FCoE forwarding class (the forwarding class used for the fixed classifier on the Fibre Channel interface). When you configure classifiers for ingress Ethernet interfaces, map only the rewrite value code point to the forwarding class.

For example, if the rewrite value uses code point 101 for lossless FCoE forwarding class `fcoe_fc1`, then in the classifier configuration attached to ingress Ethernet interfaces, code point 101 is the only code point that should be classified to the `fcoe_fc1` forwarding class. Now if you also attach a classifier to an interface that maps code point 110 to forwarding class `fcoe_fc1`, then congestion on priority 110 unfairly (and unintentionally) affects the FCoE traffic that uses priority 101. Both priorities 101 and 110 are classified into



forwarding class `fcoe_fc1`, so the traffic from both priorities shares the same fate.


.....  
The remaining statements are described separately.

|                                 |                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | interfaces—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration. |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------|

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">forwarding-class (Fibre Channel Interfaces) on page 5212</a></li><li>• <a href="#">Example: Configuring IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 5094</a></li><li>• <a href="#">Understanding CoS IEEE 802.1p Priority Remapping on an FCoE-FC Gateway on page 4911</a></li><li>• <a href="#">Understanding CoS Classifiers on page 4846</a></li></ul> |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



## rx-buffers

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | rx-buffers (on   off);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit <a href="#">interfaces interface-name ether-options configured-flow-control</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Enable or disable an interface to generate and send Ethernet PAUSE messages. If you enable the receive buffers to generate and send PAUSE messages, when the receive buffers reach a certain level of fullness, the interface sends a PAUSE message to the connected peer. If the connected peer is properly configured, it stops transmitting frames to the interface on the entire link. When the interface receive buffer empties below a certain threshold, the interface sends a message to the connected peer to resume sending frames.</p> <p>Ethernet PAUSE prevents buffers from overflowing and dropping packets during periods of network congestion. If the other devices in the network are also configured to support PAUSE, PAUSE supports lossless operation. Use the <b>rx-buffers</b> statement with the <b>tx-buffers</b> statement to configure asymmetric Ethernet PAUSE on an interface. (Use the <b>flow-control</b> statement to enable symmetric PAUSE and the <b>no-flow-control</b> statement to disable symmetric PAUSE on an interface. Symmetric flow control and asymmetric flow control are mutually exclusive features. If you attempt to configure both, the switch returns a commit error.)</p> <div style="margin-top: 20px;">  <p><b>NOTE:</b> Ethernet PAUSE temporarily stops transmitting all traffic on a link when the buffers fill to a certain threshold. To temporarily pause traffic on individual “lanes” of traffic (each lane contains the traffic associated with a particular IEEE 802.1p code point, so there can be eight lanes of traffic on a link), use priority-based flow control (PFC).</p> <p>Ethernet PAUSE and PFC are mutually exclusive features, so you cannot configure both of them on the same interface. If you attempt to configure both Ethernet PAUSE and PFC on an interface, the switch returns a commit error.</p> </div> |
| <b>Default</b>                  | Flow control is disabled. You must explicitly configure Ethernet PAUSE flow control on interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <b>on   off</b> —Enable or disable an interface to generate and send Ethernet PAUSE messages.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">flow-control on page 2066</a></li> <li>• <a href="#">tx-buffers on page 5262</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |



- [Enabling and Disabling CoS Symmetric Ethernet PAUSE Flow Control on page 5148](#)
- [Configuring CoS Asymmetric Ethernet PAUSE Flow Control on page 5149](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)

---

## scheduler (Node Device)

---

|                                 |                                                                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>scheduler <i>scheduler-name</i>;</code>                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service scheduler-maps <i>map-name</i> forwarding-class <i>class-name</i></a> ]                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                        |
| <b>Description</b>              | Map a scheduler to a forwarding class using a scheduler map.                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <i>scheduler-name</i> —Name of the scheduler to map to the forwarding class.                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | interfaces—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring CoS Hierarchical Port Scheduling (ETS) on page 4962</a></li><li>• <a href="#">Example: Configuring Queue Schedulers on page 5030</a></li><li>• <a href="#">Understanding CoS Output Queue Schedulers on page 4876</a></li></ul> |

---

## scheduler-map

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>scheduler-map <i>map-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service traffic-control-profiles <i>traffic-control-profile-name</i></a> ]                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Associate a scheduler map with a traffic control profile.                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <i>map-name</i> —Name of the scheduler map.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | interfaces—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring CoS Hierarchical Port Scheduling (ETS) on page 4962</a></li><li>• <a href="#">Example: Configuring Traffic Control Profiles (Priority Group Scheduling) on page 5037</a></li><li>• <a href="#">Example: Configuring Queue Schedulers on page 5030</a></li><li>• <a href="#">Understanding CoS Traffic Control Profiles on page 4886</a></li><li>• <a href="#">Understanding CoS Output Queue Schedulers on page 4876</a></li></ul> |



## scheduler-maps

---

|                                 |                                                                                                                                                                                                                                                                                                              |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> scheduler-maps {   map-name {     forwarding-class class-name scheduler scheduler-name;   } } </pre>                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service</a> ]                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                            |
| <b>Description</b>              | Specify a scheduler map name to map a scheduler configuration to a forwarding class.                                                                                                                                                                                                                         |
| <b>Options</b>                  | <p><b>map-name</b>—Name of the scheduler map.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS Hierarchical Port Scheduling (ETS) on page 4962</a></li> <li>• <a href="#">Example: Configuring Queue Schedulers on page 5030</a></li> <li>• <a href="#">Understanding CoS Output Queue Schedulers on page 4876</a></li> </ul> |




## schedulers

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>schedulers {<br/>  scheduler-name {<br/>    buffer-size (percent <i>percentage</i>   remainder);<br/>    drop-profile-map loss-priority (low   medium-high   high) protocol <i>protocol</i> drop-profile<br/>      drop-profile-name;<br/>    priority <i>priority</i>;<br/>    shaping-rate (<i>rate</i>   percent <i>percentage</i>);<br/>    transmit-rate (percent <i>percentage</i>);<br/>  }<br/>}</pre> |
| Hierarchy Level          | [edit <a href="#">class-of-service</a> ]                                                                                                                                                                                                                                                                                                                                                                            |
| Release Information      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                   |
| Description              | Specify scheduler name and parameter values such minimum bandwidth ( <b>transmit-rate</b> ), maximum bandwidth ( <b>shaping-rate</b> ), and priority ( <b>priority</b> ).                                                                                                                                                                                                                                           |
| Options                  | <p><b>scheduler-name</b> —Name of the scheduler.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                      |
| Required Privilege Level | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                 |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring CoS Hierarchical Port Scheduling (ETS) on page 4962</a></li><li>• <a href="#">Example: Configuring Queue Schedulers on page 5030</a></li><li>• <a href="#">Example: Configuring Drop Profile Maps on page 5022</a></li><li>• <a href="#">Understanding CoS Output Queue Schedulers on page 4876</a></li></ul>                              |



## shaping-rate

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>shaping-rate (<i>rate</i>   percent <i>percentage</i>);</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service schedulers <i>scheduler-name</i></a> ],<br>[edit <a href="#">class-of-service traffic-control-profiles <i>profile-name</i></a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | <p>Configure the shaping rate. The shaping rate throttles the rate of packet transmission by setting a maximum bandwidth (rate in bits per second) or a maximum percentage of bandwidth for a queue or a forwarding class set. You specify the maximum bandwidth for a queue by using a scheduler map to associate a forwarding class (queue) with a scheduler that has a configured shaping rate. You specify the maximum bandwidth for a forwarding class set by setting the shaping rate for a traffic control profile, and then applying the traffic control profile and a forwarding class set to an interface.</p> <p>We recommend that you configure the shaping rate as an absolute maximum usage and not as additional usage beyond the configured transmit rate (the minimum guaranteed bandwidth for a queue) or the configured guaranteed rate (the minimum guaranteed bandwidth for a forwarding class set).</p> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 10px;">  <p><b>NOTE:</b> When you set the maximum bandwidth (<code>shaping-rate</code> value) for a queue or for a priority group at 100 Kbps or less, the traffic shaping behavior is accurate only within +/- 20 percent of the configured <code>shaping-rate</code> value.</p> </div> |
| <b>Default</b>                  | If you do not configure a shaping rate, the default shaping rate is 100 percent (all of the available bandwidth), which is the equivalent of no rate shaping.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b>percent <i>percentage</i></b>—Shaping rate as a percentage of the available interface bandwidth.<br/> <b>Range:</b> 1 through 100 percent</p> <p><b><i>rate</i></b>—Peak (maximum) rate, in bits per second (bps). You can specify a value in bits per second either as a complete decimal number or as a decimal number followed by the abbreviation k (1000), m (1,000,000), or g (1,000,000,000).<br/> <b>Range:</b> 1000 through 10,000,000,000 bps</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS Hierarchical Port Scheduling (ETS) on page 4962</a></li> <li>• <a href="#">Example: Configuring Queue Schedulers on page 5030</a></li> <li>• <a href="#">Example: Configuring Traffic Control Profiles (Priority Group Scheduling) on page 5037</a></li> <li>• <a href="#">Understanding CoS Output Queue Schedulers on page 4876</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |



- [Understanding CoS Traffic Control Profiles on page 4886](#)



## shared-buffer

```
Syntax  shared-buffer {
        egress {
            buffer-partition (lossless | lossy | multicast) {
                percent percent
            }
            percent percent;
        }
        ingress {
            percent percent;
            buffer-partition (lossless | lossless-headroom | lossy) {
                percent percent
            }
        }
    }
```

Hierarchy Level [edit [class-of-service](#)]

Release Information Statement introduced in Junos OS Release 12.3 for the QFX Series.

**Description** Configure the global shared buffer pool allocation to ports. Shared buffers are a pool of buffer space that the system can allocate dynamically across all of its ports as memory space is needed. Some buffer space is reserved for dedicated buffers (buffers allocated permanently to ports), headroom buffers (buffers that help prevent packet loss on lossless flows), and other buffers.

Configure the way the system uses the available (user-configurable) buffer space by setting the **shared-buffer** percentage for the ingress buffer pool and for the egress buffer pool.

The percentage you specify is the percentage of available buffer space allocated to the global shared ingress buffer pool or to the global shared egress buffer pool. If you allocate less than 100 percent of the available buffer space to the shared buffer pool, the remaining buffer space is added to the dedicated buffer pool. (You cannot directly configure the dedicated buffer pool for each port; dedicated buffers are allocated evenly across all the ports.)



**CAUTION:** Changing the buffer configuration is a disruptive event. Traffic stops on *all* ports until the buffer reprogramming is complete.

You can also partition the ingress shared buffer pool and the egress shared buffer pool to adjust the buffer allocations for different mixes of network traffic (best-effort, lossless, multicast) using the **buffer-partition** statement.

**Options** The statements are explained separately.



|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | interfaces—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Best-Effort Unicast Traffic on page 5103</a></li><li>• <a href="#">Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Multicast Traffic on page 5109</a></li><li>• <a href="#">Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Lossless Traffic on page 5114</a></li><li>• <a href="#">Configuring Global Ingress and Egress Shared Buffers on page 5153</a></li><li>• <a href="#">Understanding CoS Buffer Configuration on page 4914</a></li></ul> |



## traceoptions (Class of Service)

**Syntax** traceoptions {  
     file *filename* <size *size*> <files *number*>  
     <world-readable | no-world-readable>;  
     flag *flag* <flag-modifier>;  
     no-remote-trace  
 }

**Hierarchy Level** [edit [class-of-service](#)]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Set class-of-service (CoS) tracing options.



**NOTE:** The `traceoptions` statement is not supported on the QFabric system.

**Default** Traceoptions is disabled.

**Options** **file *filename***—Name of the file to receive the tracing operation output. Enclose the name in quotation marks. Traceoption output files are located in the `/var/log/` directory.

**files *number***—(Optional) Maximum number of trace files. When a trace file named **trace-file** reaches its maximum size, it is renamed **trace-file.0**. The traceoption output continues in a second trace file named **trace-file.1**. When **trace-file.1** reaches its maximum size, output continues in a third file named **trace-file.2**, and so on. When the maximum number of trace files is reached, the oldest trace file is overwritten.

If you specify a maximum number of files, you must also specify a maximum file size with the size option.

**Range:** 2 through 1000 files

**Default:** 1 trace file

**flag**—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements:

- **all**—Trace all operations.
- **asynch**—Trace asynchronous configuration processing.
- **chassis-scheduler**—Trace chassis stream scheduler processing.
- **cos-adjustment**—Trace CoS rate adjustments.
- **dynamic**—Trace dynamic CoS functions.
- **hardware-database**—Trace the chassis hardware database related processing.
- **init**—Trace initialization events.



- **performance-monitor**—Trace performance monitor counters.
- **process**—Trace configuration processing.
- **restart**—Trace restart processing.
- **route-socket**—Trace route-socket events.
- **show**—Trace show command servicing.
- **snmp**—Trace SNMP-related processing.
- **util**—Trace utilities.

The following are the global tracing options:

- **all**—Perform all tracing operations
- **parse**—Trace parser processing.

**no-remote-trace**—(Optional) Disable remote tracing.

**no-world-readable**—(Optional) Prevent any user from reading the log file.

**size** *size*—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches its maximum size, it is renamed **trace-file.0**. Incoming tracefile data is logged in the now empty **trace-file**. When **trace-file** again reaches its maximum size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

If you specify a maximum file size, you must also specify a maximum number of trace files with the **files** option.

**Syntax:** *xk* to specify KB, *xm* to specify MB, or *xg* to specify GB

**Range:** 10 KB through the maximum file size of 4 GB (maximum is lower if 4 GB is not supported on your system)

**Default:** 1 MB

**world-readable**—(Optional) Allow any user to read the log file.

|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| <b>Required Privilege</b> | routing—To view this statement in the configuration.        |
| <b>Level</b>              | routing-control—To add this statement to the configuration. |



## traffic-control-profiles

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>traffic-control-profiles <i>profile-name</i> {     <a href="#">guaranteed-rate</a> (<i>rate</i>  percent <i>percentage</i>);     <a href="#">scheduler-map</a> <i>map-name</i>;     <a href="#">shaping-rate</a> (<i>rate</i>  percent <i>percentage</i>); }</pre>                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit <a href="#">class-of-service</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Configure traffic shaping and scheduling profiles for forwarding class sets (priority groups) to implement enhanced transmission selection (ETS) or for logical interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Options</b>                  | <p><b><i>profile-name</i></b>—Name of the traffic-control profile. This name is also used to specify an output traffic control profile.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | <p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS Hierarchical Port Scheduling (ETS) on page 4962</a></li> <li>• <a href="#">Example: Configuring Traffic Control Profiles (Priority Group Scheduling) on page 5037</a></li> <li>• <a href="#">Example: Configuring Forwarding Class Sets on page 5027</a></li> <li>• <a href="#">Assigning CoS Components to Interfaces on page 5157</a></li> <li>• <a href="#">output-traffic-control-profile on page 5237</a></li> <li>• <a href="#">Understanding CoS Traffic Control Profiles on page 4886</a></li> </ul> |



## transmit-rate

---

**Syntax** `transmit-rate (rate | percent percentage);`

**Hierarchy Level** [edit `class-of-service schedulers scheduler-name`]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Specify the minimum transmission rate or percentage for a queue (forwarding class) scheduler. The transmit rate also determines the amount of excess (extra) priority group bandwidth that the queue can share. Extra priority group bandwidth is allocated among the queues in the priority group in proportion to the transmit rate of each queue.



.....

**NOTE:** The `transmit-rate` setting works only if you also configure the `guaranteed-rate` in the traffic control profile that is attached to the forwarding class set to which the queue belongs. If you do not configure the guaranteed rate, the minimum guaranteed rate for individual queues that you set using the `transmit-rate` statement does not work. The sum of all queue transmit rates in a forwarding class set should not exceed the traffic control profile guaranteed rate.

.....



.....

**NOTE:** You cannot configure a transmit rate for strict-high priority queues. Queues (forwarding classes) with a configured transmit rate cannot be included in a forwarding class set that has strict-high priority queues.

.....



.....

**NOTE:** For transmit rates below 1 Gbps, we recommend that you configure the transmit rate as a percentage instead of as a fixed rate. This is because the system converts fixed rates into percentages and may round small fixed rates to a lower percentage. For example, a fixed rate of 350 Mbps is rounded down to 3 percent instead of 3.5 percent.

.....

**Default** If you do not include this statement, the default scheduler transmission rate and buffer size percentages for queues 0 through 11 are:



| Queue Number        | Default Minimum Guaranteed Bandwidth |
|---------------------|--------------------------------------|
| 0 (best-effort)     | 5 %                                  |
| 1                   | 0                                    |
| 2                   | 0                                    |
| 3 (fcoe)            | 35 %                                 |
| 4 (no-loss)         | 35 %                                 |
| 5                   | 0                                    |
| 6                   | 0                                    |
| 7 (network control) | 5 %                                  |
| 8 (mcast)           | 20 %                                 |
| 9                   | 0                                    |
| 10                  | 0                                    |
| 11                  | 0                                    |

Configure schedulers if you want to change the minimum guaranteed bandwidth and other queue characteristics.

- Options**
- rate**—Minimum transmission rate for the queue, in bps. You can specify a value in bits-per-second either as a complete decimal number or as a decimal number followed by the abbreviation **k** (1000), **m** (1,000,000), or **g** (1,000,000,000).  
**Range:** 1000 through 10,000,000,000 bps
- percent** **percentage**—Minimum percentage of transmission capacity allocated to the queue. A percentage of zero means that there is no minimum bandwidth guarantee for the queue.  
**Range:** 0 through 100 percent
- remainder**—Remaining rate available.


**Required Privilege Level**

interfaces—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

- Related Documentation**
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
  - [Example: Configuring Queue Schedulers on page 5030](#)
  - [Understanding CoS Output Queue Schedulers on page 4876](#)



## tx-buffers

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | tx-buffers (on   off);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit <a href="#">interfaces</a> <i>interface-name</i> <a href="#">ether-options</a> <a href="#">configured-flow-control</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>              | <p>Enable or disable an interface to respond to received Ethernet PAUSE messages. If you enable the transmit buffers to respond to PAUSE messages, when the interface receives a PAUSE message from the connected peer, the interface stops transmitting frames on the entire link. When the receive buffer on the connected peer empties below a certain threshold, the peer interface sends a message to the paused interface to resume sending frames.</p> <p>Ethernet PAUSE prevents buffers from overflowing and dropping packets during periods of network congestion. If the other devices in the network are also configured to support PAUSE, PAUSE supports lossless operation. Use the <b>tx-buffers</b> statement with the <b>rx-buffers</b> statement to configure asymmetric Ethernet PAUSE on an interface. (Use the <b>flow-control</b> statement to enable symmetric PAUSE and the <b>no-flow-control</b> statement to disable symmetric PAUSE on an interface. Symmetric flow control and asymmetric flow control are mutually exclusive features. If you attempt to configure both, the switch returns a commit error.)</p> <div>  <p><b>NOTE:</b> Ethernet PAUSE temporarily stops transmitting all traffic on a link when the buffers fill to a certain threshold. To temporarily pause traffic on individual “lanes” of traffic (each lane contains the traffic associated with a particular IEEE 802.1p code point, so there can be eight lanes of traffic on a link), use priority-based flow control (PFC).</p> <p>Ethernet PAUSE and PFC are mutually exclusive features, so you cannot configure both of them on the same interface. If you attempt to configure both Ethernet PAUSE and PFC on an interface, the switch returns a commit error.</p> </div> |
| <b>Default</b>                  | Flow control is disabled. You must explicitly configure Ethernet PAUSE flow control on interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <b>on   off</b> —Enable or disable an interface to respond to an Ethernet PAUSE message.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">flow-control on page 2066</a></li> <li>• <a href="#">rx-buffers on page 5249</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |



- [Enabling and Disabling CoS Symmetric Ethernet PAUSE Flow Control on page 5148](#)
- [Configuring CoS Asymmetric Ethernet PAUSE Flow Control on page 5149](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)

## unit

---

**Syntax**     `unit logical-unit-number {  
                   classifiers {  
                     (dscp | dscp-ipv6 | ieee-802.1) (classifier-name | default);  
                   }  
                   forwarding-class class-name;  
                   rewrite-rules {  
                     (dscp | dscp-ipv6 | ieee-802.1) (classifier-name | default);  
                   }  
                 }`

**Hierarchy Level**     [edit **class-of-service interfaces** *interface-name*]

**Release Information**     Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**     Configure a logical interface on the physical device. You must configure a logical interface to use the physical device.

**Options**     *logical-unit-number*—Number of the logical unit.

**Range:** 0 through 16,385

The remaining statements are explained separately.

**Required Privilege Level**     interfaces—To view this statement in the configuration.  
                                          interface-control—To add this statement to the configuration.

**Related Documentation**     • [Assigning CoS Components to Interfaces on page 5157](#)







## CHAPTER 60

# Administration

- [Routine Monitoring on page 5265](#)
- [Operational Commands on page 5271](#)

## Routine Monitoring

---

- [Monitoring CoS Classifiers on page 5265](#)
- [Monitoring CoS Forwarding Classes on page 5266](#)
- [Monitoring Interfaces That Have CoS Components on page 5267](#)
- [Monitoring CoS Rewrite Rules on page 5268](#)
- [Monitoring CoS Scheduler Maps on page 5269](#)
- [Monitoring CoS Value Aliases on page 5270](#)

## Monitoring CoS Classifiers

**Purpose** Display the mapping of incoming CoS values to forwarding class and loss priority for each classifier.

**Action** To monitor CoS classifiers in the CLI, enter the CLI command:

```
user@switch> show class-of-service classifier
```

To monitor a particular classifier in the CLI, enter the CLI command:

```
user@switch> show class-of-service classifier name classifier-name
```

To monitor a particular type of classifier in the CLI, enter the CLI command:

```
user@switch> show class-of-service classifier type classifier-type
```

**Meaning** [Table 441 on page 5265](#) summarizes key output fields for CoS classifiers.

**Table 441: Summary of Key CoS Classifier Output Fields**

| Field      | Values                |
|------------|-----------------------|
| Classifier | Name of a classifier. |



Table 441: Summary of Key CoS Classifier Output Fields (*continued*)

| Field            | Values                                                                                                                                                                                                                                                                    |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Code point type  | Type of classifier: <ul style="list-style-type: none"> <li>• <b>dscp</b>—All classifiers of the DSCP type.</li> <li>• <b>ieee-802.1</b>—All classifiers of the IEEE 802.1 type.</li> <li>• <b>ieee-mcast</b>—All classifiers of the IEEE 802.1 multicast type.</li> </ul> |
| Index            | Internal index of the classifier.                                                                                                                                                                                                                                         |
| Code point       | DSCP or IEEE 802.1 code point value of the incoming packets, in bits. These values are used for classification.                                                                                                                                                           |
| Forwarding Class | Name of the forwarding class that the classifier assigns to an incoming packet. This class affects the forwarding and scheduling policies that are applied to the packet as it transits the switch.                                                                       |
| Loss Priority    | Loss priority value that the classifier assigns to the incoming packet based on its code point value.                                                                                                                                                                     |

- Related Documentation**
- [Defining CoS Unicast BA Classifiers on page 5133](#)
  - [Defining CoS Multidestination \(Multicast, Broadcast, DLF\) BA Classifiers on page 5135](#)

## Monitoring CoS Forwarding Classes

**Purpose** Use the monitoring functionality to view the current assignment of CoS forwarding classes to queue numbers on the system.

**Action** To monitor CoS forwarding classes in the CLI, enter the following CLI command:

```
user@switch> show class-of-service forwarding-class
```

**Meaning** [Table 442 on page 5267](#) summarizes key output fields for CoS forwarding classes.



Table 442: Summary of Key CoS Forwarding Class Output Fields

| Field            | Values                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Forwarding Class | <p>Names of forwarding classes assigned to queue numbers. By default, the following unicast forwarding classes are assigned to queues 0, 3, 4, and 7, respectively:</p> <ul style="list-style-type: none"> <li>• <b>best-effort</b>—Provides no special CoS handling of packets. Loss priority is typically not carried in a CoS value.</li> <li>• <b>fcoe</b>—Provides guaranteed delivery for Fibre Channel over Ethernet (FCoE) traffic.</li> <li>• <b>no-loss</b>—Provides guaranteed delivery for TCP lossless traffic</li> <li>• <b>network-control</b>—Packets can be delayed but not dropped.</li> </ul> <p>By default, the following multdestination forwarding class is assigned to queue 8:</p> <ul style="list-style-type: none"> <li>• <b>mcast</b>—Provides no special CoS handling of packets.</li> </ul> |
| Queue            | <p>Queue number corresponding to the forwarding class name.</p> <p>By default, four queues (0, 3, 4, and 7) are assigned to unicast forwarding classes and one queue (8) is assigned to a multdestination forwarding class.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| No-Loss          | <p>Packet drop attribute associated with each forwarding class:</p> <ul style="list-style-type: none"> <li>• Disabled—The forwarding class is configured for lossy transport (packets might drop during periods of congestion)</li> <li>• Enabled—The forwarding class is configured for lossless transport</li> </ul> <p><b>NOTE:</b> To achieve lossless transport, you must ensure that priority-based flow control (PFC) and DCBX are properly configured on the lossless priority (IEEE 802.1p code point), and that sufficient port bandwidth is reserved for the lossless traffic flows.</p>                                                                                                                                                                                                                      |

- Related Documentation**
- [Defining CoS Forwarding Classes on page 5137](#)
  - [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)

## Monitoring Interfaces That Have CoS Components

**Purpose** Use the monitoring functionality to display details about the physical and logical interfaces and the CoS components assigned to them.

**Action** To monitor interfaces that have CoS components in the CLI, enter the command:

```
user@switch> show class-of-service interface
```

To monitor a specific interface in the CLI, enter the command:

```
user@switch> show class-of-service interface interface-name
```

**Meaning** [Table 443 on page 5268](#) summarizes key output fields for CoS interfaces.



Table 443: Summary of Key CoS Interfaces Output Fields

| Field                         | Values                                                                                                                                                                                                                                        |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Physical interface            | Name of a physical interface to which CoS components are assigned.                                                                                                                                                                            |
| Index                         | Index of this interface or the internal index of a specific object.                                                                                                                                                                           |
| Queues supported              | Number of queues you can configure on the interface.                                                                                                                                                                                          |
| Queues in use                 | Number of queues currently configured.                                                                                                                                                                                                        |
| Scheduler map                 | Name of the scheduler map associated with this interface.                                                                                                                                                                                     |
| Congestion-notification       | Status of congestion notification (enabled or disabled).                                                                                                                                                                                      |
| Rewrite Input IEEE Code-point | (Fibre Channel NP_Port interfaces only) IEEE 802.1p code point (priority) the interface assigns to incoming Fibre Channel (FC) traffic when the interface encapsulates the FC traffic in Ethernet before forwarding it onto the FCoE network. |
| Logical Interface             | Name of a logical interface on the physical interface to which CoS components are assigned.                                                                                                                                                   |
| Object                        | Category of an object—for example, <b>classifier</b> , <b>scheduler-map</b> , or <b>rewrite</b> .                                                                                                                                             |
| Name                          | Name of the object—for example, <b>ba-classifier</b> .                                                                                                                                                                                        |
| Type                          | Type of the object—for example, <b>ieee8021p</b> for a classifier.                                                                                                                                                                            |

**Related Documentation** • [Assigning CoS Components to Interfaces on page 5157](#)

## Monitoring CoS Rewrite Rules

**Purpose** Use the monitoring functionality to display information about CoS value rewrite rules, which are based on the forwarding class and loss priority.

**Action** To monitor CoS rewrite rules in the CLI, enter the CLI command:

```
user@switch> show class-of-service rewrite-rule
```

To monitor a particular rewrite rule in the CLI, enter the CLI command:

```
user@switch> show class-of-service rewrite-rule name rewrite-rule-name
```

To monitor a particular type of rewrite rule (for example, DSCP, DSCP IPv6, or IEEE-802.1) in the CLI, enter the CLI command:

```
user@switch> show class-of-service rewrite-rule type rewrite-rule-type
```



**Meaning** [Table 444 on page 5269](#) summarizes key output fields for CoS rewrite rules.

**Table 444: Summary of Key CoS Rewrite Rule Output Fields**

| Field            | Values                                                                                                                                                                                                                                     |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rewrite rule     | Name of the rewrite rule.                                                                                                                                                                                                                  |
| Code point type  | Rewrite rule type: <ul style="list-style-type: none"> <li>• <b>dscp</b>—For IPv4 DiffServ traffic.</li> <li>• <b>dscp-ipv6</b>—For IPv6 Diffserv traffic.</li> <li>• <b>ieee-802.1</b>—For Layer 2 traffic.</li> </ul>                     |
| Index            | Internal index for the rewrite rule.                                                                                                                                                                                                       |
| Forwarding class | Name of the forwarding class that is used to determine CoS values for rewriting in combination with loss priority.<br><br>Rewrite rules are applied to CoS values in outgoing packets based on forwarding class and loss priority setting. |
| Loss priority    | Level of loss priority that is used to determine CoS values for rewriting in combination with forwarding class.                                                                                                                            |
| Code point       | Rewrite code point value.                                                                                                                                                                                                                  |

**Related Documentation** • [Defining CoS Rewrite Rules on page 5155](#)

## Monitoring CoS Scheduler Maps

**Purpose** Use the monitoring functionality to display assignments of CoS forwarding classes to schedulers.

**Action** To monitor CoS scheduler maps in the CLI, enter the CLI command:

```
user@switch> show class-of-service scheduler-map
```

To monitor a specific scheduler map in the CLI, enter the CLI command:

```
user@switch> show class-of-service scheduler-map scheduler-map-name
```

**Meaning** [Table 445 on page 5269](#) summarizes key output fields for CoS scheduler maps.

**Table 445: Summary of Key CoS Scheduler Maps Output Fields**

| Field         | Values                                                                   |
|---------------|--------------------------------------------------------------------------|
| Scheduler map | Name of the scheduler map.                                               |
| Index         | Index of a specific object—scheduler maps, schedulers, or drop profiles. |



Table 445: Summary of Key CoS Scheduler Maps Output Fields (*continued*)

| Field            | Values                                                                                                                                                                                                                                                                                                                                                      |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Scheduler        | Name of the scheduler.                                                                                                                                                                                                                                                                                                                                      |
| Forwarding class | Names of the forwarding classes to which the scheduler is assigned.                                                                                                                                                                                                                                                                                         |
| Transmit rate    | Configured transmit rate of the scheduler as a percentage of the total interface bandwidth.                                                                                                                                                                                                                                                                 |
| Priority         | <p>Scheduling priority of a queue:</p> <ul style="list-style-type: none"> <li>• <b>strict-high</b> or <b>high</b>—Packets in this queue are transmitted first. Only one queue can be configured as <b>strict-high</b> or <b>high</b>.</li> <li>• <b>low</b>—Packets in this queue are transmitted after packets in the <b>strict-high</b> queue.</li> </ul> |
| Drop Profiles    | Name and index of a drop profile that is assigned to a specific loss priority and protocol pair.                                                                                                                                                                                                                                                            |
| Loss Priority    | Drop profile associated with each packet loss priority. You can configure different drop profiles for <b>low</b> , <b>medium-high</b> , and <b>high</b> loss priority traffic.                                                                                                                                                                              |
| Protocol         | Transport protocol of the drop profile for the particular priority.                                                                                                                                                                                                                                                                                         |
| Name             | Name of the drop profile.                                                                                                                                                                                                                                                                                                                                   |

**Related Documentation** • [Defining CoS Queue Schedulers on page 5139](#)

## Monitoring CoS Value Aliases

**Purpose** Use the monitoring functionality to display information about the CoS value aliases that the system is currently using to represent DSCP and IEEE 802.1p code point bits.

**Action** To monitor CoS value aliases in the CLI, enter the CLI command:

```
user@switch> show class-of-service code-point-aliases
```

To monitor a specific type of code-point alias (for example, DSCP or IEEE 802.1) in the CLI, enter the CLI command:

```
user@switch> show class-of-service code-point-aliases ieee-802.1
```

**Meaning** [Table 446 on page 5271](#) summarizes key output fields for CoS value aliases.



Table 446: Summary of Key CoS Value Alias Output Fields

| Field           | Values                                                                                                                                                                                                                                    |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Code point type | Type of the CoS value: <ul style="list-style-type: none"><li>• <b>dscp</b>—Examines Layer 3 packet headers for IP packet classification.</li><li>• <b>ieee-802.1</b>—Examines Layer 2 packet headers for packet classification.</li></ul> |
| Alias           | Name given to a set of bits—for example, <b>af11</b> is a name for bits <b>001010</b> .                                                                                                                                                   |
| Bit pattern     | Set of bits associated with the alias.                                                                                                                                                                                                    |

**Related Documentation** • [Defining CoS Code-Point Aliases on page 5133](#)

## Operational Commands



## show class-of-service

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <b>show class-of-service</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Display the class-of-service (CoS) information.                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Monitoring CoS Value Aliases on page 5270</a></li> <li>• <a href="#">Monitoring CoS Classifiers on page 5265</a></li> <li>• <a href="#">Monitoring CoS Forwarding Classes on page 5266</a></li> <li>• <a href="#">Monitoring Interfaces That Have CoS Components on page 5267</a></li> <li>• <a href="#">Monitoring CoS Scheduler Maps on page 5269</a></li> <li>• <a href="#">Monitoring CoS Rewrite Rules on page 5268</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show class-of- service on page 5274</a>                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Output Fields</b>            | Table 447 on page 5272 lists the output fields for the <b>show class-of-service</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                         |

**Table 447: show class-of-service Output Fields**

| Field Name              | Field Description                                                                                                                                                                                                             | Level of Output |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Forwarding class</b> | The forwarding class configuration: <ul style="list-style-type: none"> <li>• <b>Forwarding class</b>—Name of the forwarding class.</li> <li>• <b>ID</b>—Forwarding class ID.</li> <li>• <b>Queue</b>—Queue number.</li> </ul> | All levels      |
| <b>Code point type</b>  | The type of code-point alias: <ul style="list-style-type: none"> <li>• <b>dscp</b>—Aliases for DiffServ code point (DSCP) values.</li> <li>• <b>ieee-802.1</b>—Aliases for IEEE 802.1p values.</li> </ul>                     | All levels      |
| <b>Alias</b>            | Names given to CoS values.                                                                                                                                                                                                    | All levels      |
| <b>Bit pattern</b>      | Set of bits associated with an alias.                                                                                                                                                                                         | All levels      |
| <b>Classifier</b>       | Name of the classifier.                                                                                                                                                                                                       | All levels      |
| <b>Code point</b>       | Code-point values.                                                                                                                                                                                                            | All levels      |
| <b>Loss priority</b>    | Loss priority assigned to specific CoS values and aliases of the classifier.                                                                                                                                                  | All levels      |
| <b>Rewrite rule</b>     | Name of the rewrite rule if one has been configured.                                                                                                                                                                          | All levels      |



Table 447: show class-of-service Output Fields (*continued*)

| Field Name                     | Field Description                                                                                                                                     | Level of Output |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Drop profile</b>            | Name of the drop profile.                                                                                                                             | All levels      |
| <b>Type</b>                    | Type of drop profile. QFX Series supports only the <b>discrete</b> type of drop-profile.                                                              | All levels      |
| <b>Fill level</b>              | Percentage of queue buffer fullness in a drop profile at which packets begin to drop during periods of congestion.                                    | All levels      |
| <b>Scheduler map</b>           | Name of the scheduler map.                                                                                                                            | All levels      |
| <b>Scheduler</b>               | Name of the scheduler.                                                                                                                                | All levels      |
| <b>Transmit rate</b>           | Transmission rate of the scheduler.                                                                                                                   | All levels      |
| <b>Buffer size</b>             | Delay buffer size in the queue.                                                                                                                       | All levels      |
| <b>Drop profiles</b>           | Drop profiles configured for the specified scheduler.                                                                                                 | All levels      |
| <b>Protocol</b>                | Transport protocol corresponding to the drop profile.                                                                                                 | All levels      |
| <b>Name</b>                    | Name of the drop profile.                                                                                                                             | All levels      |
| <b>Queues supported</b>        | Number of queues that can be configured on the interface.                                                                                             | All levels      |
| <b>Queues in use</b>           | Number of queues currently configured.                                                                                                                | All levels      |
| <b>Physical interface</b>      | Name of the physical interface.                                                                                                                       | All levels      |
| <b>Scheduler map</b>           | Name of the scheduler map.                                                                                                                            | All levels      |
| <b>Congestion-notification</b> | Enabled if a congestion notification profile is applied to the interface; disabled if no congestion notification profile is applied to the interface. | All levels      |
| <b>Forwarding class set</b>    | Name of the forwarding class set (priority group).                                                                                                    |                 |
| <b>Index</b>                   | Internal index of an object.                                                                                                                          | All levels      |



## Sample Output

```

show class-of-service user@switch> show class-of-service
Forwarding class          ID      Queue
best-effort               0        0
fcoe                      1        3
no-loss                   2        4
network-control           3        7
mcast                     8        8

Code point type: dscp
Alias      Bit pattern
af11       001010
af12       001100
...        ...

Code point type: ieee-802.1
Alias      Bit pattern
af11       100
...        ...

Classifier: dscp-default, Code point type: dscp, Index: 7
Code point  Forwarding class  Loss priority
000000      best-effort    low
000001      best-effort    low
...         ...         ...

Classifier: ieee8021p-default, Code point type: ieee-802.1, Index: 11
Code point  Forwarding class  Loss priority
000         best-effort    low
001         best-effort    low
010         best-effort    low
011         fcoe          low
100         no-loss       low
101         best-effort    low
110         network-control low
111         network-control low

Drop profile:<default-drop-profile>, Type: discrete, Index: 1
Fill level
100

Scheduler map: <default>, Index: 2

Scheduler: <default-be>, Forwarding class: best-effort, Index: 21
Transmit rate: 5 percent, Rate Limit: none, Buffer size: 5 percent, Buffer
Limit: none,
Priority: low
Excess Priority: low
drop-profile-map-set-type: mark
Drop profiles:
Loss priority  Protocol  Index  Name
Low           any      1      <default-drop-profile>
Medium high   any      1      <default-drop-profile>
High          any      1      <default-drop-profile>

Scheduler: <default-fcoe>, Forwarding class: fcoe, Index: 50
Transmit rate: 35 percent, Rate Limit: none, Buffer size: 35 percent, Buffer
Limit: none,
Priority: low

```



```

Excess Priority: low
drop-profile-map-set-type: mark
Drop profiles:
  Loss priority  Protocol  Index  Name
  Low           any       1      <default-drop-profile>
  Medium high   any       1      <default-drop-profile>
  High          any       1      <default-drop-profile>

Scheduler: <default-noloss>, Forwarding class: no-loss, Index: 51
  Transmit rate: 35 percent, Rate Limit: none, Buffer size: 35 percent, Buffer
Limit: none,
  Priority: low
  Excess Priority: low
  drop-profile-map-set-type: mark
  Drop profiles:
    Loss priority  Protocol  Index  Name
    Low           any       1      <default-drop-profile>
    Medium high   any       1      <default-drop-profile>
    High          any       1      <default-drop-profile>

Scheduler: <default-nc>, Forwarding class: network-control, Index: 23
  Transmit rate: 5 percent, Rate Limit: none, Buffer size: 5 percent, Buffer
Limit: none,
  Priority: low
  Excess Priority: low
  drop-profile-map-set-type: mark
  Drop profiles:
    Loss priority  Protocol  Index  Name
    Low           any       1      <default-drop-profile>
    Medium high   any       1      <default-drop-profile>
    High          any       1      <default-drop-profile>

Scheduler: <default-mcast>, Forwarding class: mcast, Index: 49
  Transmit rate: 20 percent, Rate Limit: none, Buffer size: 20 percent, Buffer
Limit: none,
  Priority: low
  Excess Priority: low
  drop-profile-map-set-type: mark
  Drop profiles:
    Loss priority  Protocol  Index  Name
    Low           any       1      <default-drop-profile>
    Medium high   any       1      <default-drop-profile>
    High          any       1      <default-drop-profile>

Physical interface: xe-0/0/0, Index: 129
Queues supported: 12, Queues in use: 12
Scheduler map: <default>, Index: 2
Congestion-notification: Disabled

Physical interface: xe-0/0/1, Index: 130
Queues supported: 12, Queues in use: 12
Scheduler map: <default>, Index: 2
Congestion-notification: Disabled

...           ...           ...

Forwarding class set: lan-fcset, Type: normal-type, Forwarding class set index:
7
  Forwarding class                                Index
  best-effort                                     0

```







## show class-of-service classifier

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>show class-of-service classifier &lt;name <i>name</i>&gt; &lt;type dscp   type dscp-ipv6   type exp   type ieee-802.1   type inet-precedence&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | For each class-of-service (CoS) classifier, display the mapping of code point value to forwarding class and loss priority.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <p><b>none</b>—Display all classifiers.</p> <p><b>name <i>name</i></b>—(Optional) Display named classifier.</p> <p><b>type dscp</b>—(Optional) Display all classifiers of the Differentiated Services code point (DSCP) type.</p> <p><b>type dscp-ipv6</b>—(Optional) Display all classifiers of the DSCP for IPv6 type.</p> <p><b>type exp</b>—(Optional) Display all classifiers of the MPLS experimental (EXP) type.</p> <p><b>type ieee-802.1</b>—(Optional) Display all classifiers of the ieee-802.1 type.</p> <p><b>type inet-precedence</b>—(Optional) Display all classifiers of the inet-precedence type.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>List of Sample Output</b>    | <p><a href="#">show class-of-service classifier type ieee-802.1 on page 5278</a></p> <p><a href="#">show class-of-service classifier type ieee-802.1 (QFX Series) on page 5278</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Output Fields</b>            | Table 448 on page 5277 describes the output fields for the <b>show class-of-service classifier</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                     |

**Table 448: show class-of-service classifier Output Fields**

| Field Name              | Field Description                                                                                                                                                       |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Classifier</b>       | Name of the classifier.                                                                                                                                                 |
| <b>Code point type</b>  | Type of the classifier: <b>exp</b> (not on EX Series switch), <b>dscp</b> , <b>dscp-ipv6</b> (not on EX Series switch), <b>ieee-802.1</b> , or <b>inet-precedence</b> . |
| <b>Index</b>            | Internal index of the classifier.                                                                                                                                       |
| <b>Code point</b>       | Code point value used for classification                                                                                                                                |
| <b>Forwarding class</b> | Classification of a packet affecting the forwarding, scheduling, and marking policies applied as the packet transits the router.                                        |



Table 448: show class-of-service classifier Output Fields (*continued*)

| Field Name    | Field Description                                                                                                                                                                                                 |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Loss priority | Loss priority value used for classification. For most platforms, the value is <b>high</b> or <b>low</b> . For some platforms, the value is <b>high</b> , <b>medium-high</b> , <b>medium-low</b> , or <b>low</b> . |

## Sample Output

show class-of-service  
classifier type  
ieee-802.1

```
user@host> show class-of-service classifier type ieee-802.1
Classifier: ieee802.1-default, Code point type: ieee-802.1, Index: 3
Code Point      Forwarding Class      Loss priority
000             best-effort           low
001             best-effort           high
010             expedited-forwarding  low
011             expedited-forwarding  high
100             assured-forwarding    low
101             assured-forwarding    medium-high
110             network-control       low
111             network-control       high

Classifier: users-ieee802.1, Code point type: ieee-802.1
Code point      Forwarding class      Loss priority
100             expedited-forwarding  low
```

show class-of-service  
classifier type  
ieee-802.1 (QFX  
Series)

```
user@switch> show class-of-service classifier type ieee-802.1
Classifier: ieee8021p-default, Code point type: ieee-802.1, Index: 11
Code point      Forwarding class      Loss priority
000             best-effort           low
001             best-effort           low
010             best-effort           low
011             fcoe                  low
100             no-loss               low
101             best-effort           low
110             network-control       low
111             network-control       low

Classifier: ieee-mcast, Code point type: ieee-802.1, Index: 46
Code point      Forwarding class      Loss priority
000             mcast                 low
001             mcast                 low
010             mcast                 low
011             mcast                 low
100             mcast                 low
101             mcast                 low
110             mcast                 low
111             mcast                 low
```



## show class-of-service code-point-aliases

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show class-of-service code-point-aliases</code><br><code>&lt;dscp   dscp-ipv6   exp   ieee-802.1   inet-precedence&gt;</code>                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | Display the mapping of class-of-service (CoS) code point aliases to corresponding bit patterns.                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <p><b>none</b>—Display code point aliases of all code point types.</p> <p><b>dscp</b>—(Optional) Display Differentiated Services code point (DSCP) aliases.</p> <p><b>dscp-ipv6</b>—(Optional) Display IPv6 DSCP aliases.</p> <p><b>exp</b>—(Optional) Display MPLS EXP code point aliases.</p> <p><b>ieee-802.1</b>—(Optional) Display IEEE-802.1 code point aliases.</p> <p><b>inet-precedence</b>—(Optional) Display IPv4 precedence code point aliases.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>List of Sample Output</b>    | <a href="#">show class-of-service code-point-aliases exp on page 5280</a>                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Output Fields</b>            | <a href="#">Table 449 on page 5279</a> describes the output fields for the <b>show class-of-service code-point-aliases</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                     |

**Table 449: show class-of-service code-point-aliases Output Fields**

| Field Name             | Field Description                                                                                                                                                                                                           |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Code point type</b> | Type of the code points displayed: <b>dscp</b> , <b>dscp-ipv6</b> (not on EX Series switch), <b>exp</b> (not on EX Series switch or the QFX Series), <b>ieee-802.1</b> , or <b>inet-precedence</b> (not on the QFX Series). |
| <b>Alias</b>           | Alias for a bit pattern.                                                                                                                                                                                                    |
| <b>Bit pattern</b>     | Bit pattern for which the alias is displayed.                                                                                                                                                                               |



## Sample Output

```
show class-of-service code-point-aliases exp  user@host> show class-of-service code-point-aliases exp
Code point type: exp
Alias      Bit pattern
af11       100
af12       101
be         000
be1        001
cs6        110
cs7        111
ef         010
ef1        011
nc1        110
nc2        111
```



## show class-of-service congestion-notification

|                                 |                                                                                                                                                                                                                  |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show class-of-service congestion-notification                                                                                                                                                                    |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                  |
| <b>Description</b>              | Display whether priority-based flow control (PFC) is enabled for each IEEE 802.1p code point.                                                                                                                    |
| <b>Options</b>                  | <b>none</b> —Display the PFC state for all IEEE 802.1p code points.                                                                                                                                              |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                             |
| <b>Output Fields</b>            | <a href="#">Table 450 on page 5281</a> describes the output fields for the <b>show class-of-service congestion-notification</b> command. Output fields are listed in the approximate order in which they appear. |

**Table 450: show class-of-service congestion-notification Output Fields**

| Field Name                 | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Type</b>                | Type of interfaces on which congestion notification is applied. Congestion notification is applied on input interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Index</b>               | Index of this congestion notification profile.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Name</b>                | Name of the congestion notification profile.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Cable Length</b>        | Length of the attached physical cable in meters. The default value is 100 meters.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Priority</b>            | IEEE 802.1p code point.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>PFC</b>                 | State of PFC for the corresponding code point, either <b>enabled</b> or <b>disabled</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>MRU</b>                 | <p>Maximum receive unit of the interface in bytes. (Incoming traffic that exceeds the MRU size of an interface is dropped.) The default values are:</p> <ul style="list-style-type: none"> <li>2500 bytes for priority 3 traffic</li> <li>9216 bytes for priority 4 traffic</li> </ul> <p><b>NOTE:</b> If you configure flow control on a priority that is not one of the default flow control priorities, the default MRU value is 2500 bytes. For example, if you configure flow control on priority 5 and you do not configure an MRU value, the default MRU value is 2500 bytes.</p> |
| <b>Flow-Control-Queues</b> | Output queue mapping to IEEE 802.1p code points (priorities). Explicit output queue to priority mapping overwrites the default configuration, and only explicitly mapped queues are displayed in the output. Flow control is only enabled on a queue when you enable PFC on the corresponding priority in the input stanza of the congestion notification profile.                                                                                                                                                                                                                       |



## Sample Output

```
show class-of-service congestion-notification user@switch> show class-of-service congestion-notification
Name: fcoe_p3_cnp, Index: 12037
Type: Input
Cable Length: 100 m
  Priority  PFC      MRU
  000      Disabled
  001      Disabled
  010      Disabled
  011      Enabled   2500
  100      Enabled   9216
  101      Disabled
  110      Disabled
  111      Disabled
Type: Output
  Priority  Flow-Control-Queues
  000
  001      0
  010      1
  011      2
  100      3
  101      4
  110      5
  111      6
  111      7

Name: fcoe_p3_p5_cnp, Index: 46484
Type: Input
Cable Length: 100 m
  Priority  PFC      MRU
  000      Disabled
  001      Disabled
  010      Disabled
  011      Enabled   2240
  100      Disabled
  101      Enabled   2240
  110      Disabled
  111      Disabled
Type: Output
  Priority  Flow-Control-Queues
  011
  101      3
  101      5
```



## show class-of-service drop-profile

|                                 |                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show class-of-service drop-profile</code><br><code>&lt;profile-name profile-name&gt;</code>                                                                                                                                     |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                              |
| <b>Description</b>              | Display data points for each class-of-service (CoS) random early detection (RED) drop profile.                                                                                                                                        |
| <b>Options</b>                  | <b>none</b> —Display all drop profiles.<br><br><b>profile-name profile-name</b> —(Optional) Display the specified profile only.                                                                                                       |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                  |
| <b>List of Sample Output</b>    | <a href="#">show class-of-service drop-profile on page 5284</a><br><a href="#">show class-of-service drop-profile (EX4200 Switch) on page 5284</a><br><a href="#">show class-of-service drop-profile (EX8200 Switch) on page 5284</a> |
| <b>Output Fields</b>            | <a href="#">Table 451 on page 5283</a> describes the output fields for the <b>show class-of-service drop-profile</b> command. Output fields are listed in the approximate order in which they appear.                                 |

**Table 451: show class-of-service drop-profile Output Fields**

| Field Name              | Field Description                                                                                                                                         |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Drop profile</b>     | Name of a drop profile.                                                                                                                                   |
| <b>Type</b>             | Type of drop profile: <ul style="list-style-type: none"> <li>• <b>discrete</b> (default)</li> <li>• <b>interpolated</b> (EX8200 switches only)</li> </ul> |
| <b>Index</b>            | Internal index of this drop profile.                                                                                                                      |
| <b>Fill Level</b>       | Percentage fullness of a queue.                                                                                                                           |
| <b>Drop probability</b> | Drop probability at this fill level.                                                                                                                      |



## Sample Output

**show class-of-service  
drop-profile**

```
user@host> show class-of-service drop-profile
Drop profile: <default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100         100
Drop profile: user-drop-profile, Type: interpolated, Index: 2989
  Fill level    Drop probability
    0           0
    1           1
    2           2
    4           4
    5           5
    6           6
    8           8
   10          10
   12          15
   14          20
   15          23
... 64 entries total
   90          96
   92          96
   94          97
   95          98
   96          98
   98          99
   99          99
  100         100
```

**show class-of-service  
drop-profile (EX4200  
Switch)**

```
user@switch> show class-of-service drop-profile
Drop profile: <default-drop-profile>, Type: discrete, Index: 1
  Fill level
    100
Drop profile: dp1, Type: discrete, Index: 40496
  Fill level
    10
```

**show class-of-service  
drop-profile (EX8200  
Switch)**

```
user@switch> show class-of-service drop-profile
Drop profile: <default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100         100
Drop profile: dp1, Type: interpolated, Index: 40496
  Fill level    Drop probability
    0           0
    1           80
    2           90
    4           90
    5           90
    6           90
    8           90
   10           90
   12           91
   14           91
   15           91
   16           91
   18           91
   20           91
   22           92
```



|                                                 |                  |
|-------------------------------------------------|------------------|
| 24                                              | 92               |
| 25                                              | 92               |
| 26                                              | 92               |
| 28                                              | 92               |
| 30                                              | 92               |
| 32                                              | 93               |
| 34                                              | 93               |
| 35                                              | 93               |
| 36                                              | 93               |
| 38                                              | 93               |
| 40                                              | 93               |
| 42                                              | 94               |
| 44                                              | 94               |
| 45                                              | 94               |
| 46                                              | 94               |
| 48                                              | 94               |
| 49                                              | 94               |
| 51                                              | 95               |
| 52                                              | 95               |
| 54                                              | 95               |
| 55                                              | 95               |
| 56                                              | 95               |
| 58                                              | 95               |
| 60                                              | 95               |
| 62                                              | 96               |
| 64                                              | 96               |
| 65                                              | 96               |
| 66                                              | 96               |
| 68                                              | 96               |
| 70                                              | 96               |
| 72                                              | 97               |
| 74                                              | 97               |
| 75                                              | 97               |
| 76                                              | 97               |
| 78                                              | 97               |
| 80                                              | 97               |
| 82                                              | 98               |
| 84                                              | 98               |
| 85                                              | 98               |
| 86                                              | 98               |
| 88                                              | 98               |
| 90                                              | 98               |
| 92                                              | 99               |
| 94                                              | 99               |
| 95                                              | 99               |
| 96                                              | 99               |
| 98                                              | 99               |
| 99                                              | 99               |
| 100                                             | 100              |
| Drop profile: dp2, Type: discrete, Index: 40499 |                  |
| Fill level                                      | Drop probability |
| 10                                              | 5                |
| 50                                              | 50               |



## show class-of-service forwarding-class

|                                 |                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show class-of-service forwarding-class                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                         |
| <b>Description</b>              | Display information about forwarding classes, including the mapping of forwarding classes to queue numbers.                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• Example: Configuring CoS on EX Series Switches</li> <li>• Monitoring CoS Forwarding Classes</li> <li>• Defining CoS Forwarding Classes (CLI Procedure)</li> <li>• Configuring CoS Traffic Classification for Ingress Queuing on Oversubscribed Ports on EX8200 Line Cards (CLI Procedure)</li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show class-of-service forwarding-class on page 5287</a><br><a href="#">show class-of-service forwarding-class (EX8200 Switch) on page 5287</a><br><a href="#">show class-of-service forwarding-class (QFX Series) on page 5287</a>                                                                                                |
| <b>Output Fields</b>            | Table 452 on page 5286 describes the output fields for the <b>show class-of-service forwarding-class</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                     |

**Table 452: show class-of-service forwarding-class Output Fields**

| Field Name               | Field Description                                                                                                                                                  |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Forwarding class</b>  | Name of the forwarding class.                                                                                                                                      |
| <b>ID</b>                | Forwarding class identifier.                                                                                                                                       |
| <b>Queue</b>             | CoS queue mapped to the forwarding class.                                                                                                                          |
| <b>Policing priority</b> | Not supported on EX Series switches or the QFX Series and can be ignored.                                                                                          |
| <b>Fabric priority</b>   | (EX8200 switches only) Fabric priority for the forwarding class, either <b>high</b> or <b>low</b> . Determines the priority of packets entering the switch fabric. |



Table 452: show class-of-service forwarding-class Output Fields (*continued*)

| Field Name     | Field Description                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>No-Loss</b> | <p>(QFX Series only) Packet loss attribute to differentiate lossless forwarding classes from lossy forwarding classes:</p> <ul style="list-style-type: none"> <li>Disabled—Lossless transport is not configured on the forwarding class (packet drop attribute is <b>drop</b>).</li> <li>Enabled—Lossless transport is configured on the forwarding class (packet drop attribute is <b>no-loss</b>).</li> </ul> |

### Sample Output

show class-of-service forwarding-class

```
user@switch> show class-of-service forwarding-class
```

| Forwarding class     | ID | Queue | Policing | priority |
|----------------------|----|-------|----------|----------|
| best-effort          | 0  | 0     |          | normal   |
| expedited-forwarding | 1  | 5     |          | normal   |
| assured-forwarding   | 2  | 1     |          | normal   |
| network-control      | 3  | 7     |          | normal   |

### Sample Output

show class-of-service forwarding-class (EX8200 Switch)

```
user@switch> show class-of-service forwarding-class
```

| Forwarding class     | ID | Queue | Fabric | priority |
|----------------------|----|-------|--------|----------|
| best-effort          | 0  | 0     | low    |          |
| expedited-forwarding | 1  | 5     | low    |          |
| assured-forwarding   | 2  | 1     | low    |          |
| network-control      | 3  | 7     | low    |          |
| mcast-be             | 4  | 2     | low    |          |
| mcast-ef             | 5  | 4     | low    |          |
| mcast-af             | 6  | 6     | low    |          |

### Sample Output

show class-of-service forwarding-class (QFX Series)

```
user@switch> show class-of-service forwarding-class
```

| Forwarding class | ID | Queue | Policing | priority | No-Loss  |
|------------------|----|-------|----------|----------|----------|
| best-effort      | 0  | 0     | normal   |          | Disabled |
| fcoe             | 1  | 3     | normal   |          | Enabled  |
| no-loss          | 2  | 4     | normal   |          | Enabled  |
| network-control  | 3  | 7     | normal   |          | Disabled |
| mcast            | 8  | 8     | normal   |          | Disabled |



## show class-of-service forwarding-class-set

|                                 |                                                                                                                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show class-of-service forwarding-class-set<br><forwarding-class-set-name>                                                                                                                                     |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                               |
| <b>Description</b>              | Display the forwarding classes associated with each forwarding class set.                                                                                                                                     |
| <b>Options</b>                  | <b>none</b> —Display all forwarding class sets.<br><br><b>forwarding-class-set-name</b> —(Optional) Display the forwarding classes associated with the specified forwarding class set.                        |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                          |
| <b>Output Fields</b>            | <a href="#">Table 453 on page 5288</a> describes the output fields for the <b>show class-of-service forwarding-class-set</b> command. Output fields are listed in the approximate order in which they appear. |

**Table 453: show class-of-service forwarding-class-set Output Fields**

| Field Name                 | Field Description                   |
|----------------------------|-------------------------------------|
| Forwarding class set       | Name of the forwarding class set.   |
| Type                       | Internal Junos OS type.             |
| Forwarding class set index | Index of this forwarding class set. |
| Forwarding class           | Name of a forwarding class.         |
| Index                      | Index of this forwarding class.     |



## Sample Output

```
show class-of-service forwarding-class-set
user@switch> show class-of-service forwarding-class-set
Forwarding class set: san_fcset, Type: normal-type, Forwarding class set index:
37839
  Forwarding class      Index
  fcoe                  1

Forwarding class set: lan_fcset, Type: normal-type, Forwarding class set index:
37840
  Forwarding class      Index
  best-effort           0

Forwarding class set: multicast_fcset, Type: normal-type, Forwarding class set
index: 37841
  Forwarding class      Index
  mcast                 8
```



## show class-of-service forwarding-table

---

|                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                                       | show class-of-service forwarding-table                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Syntax (TX Matrix and TX Matrix Plus Router) | show class-of-service forwarding-table<br><lcc <i>number</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Release Information                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Description                                  | Display the entire class-of-service (CoS) configuration as it exists in the forwarding table. Executing this command is equivalent to executing all <b>show class-of-service forwarding-table</b> commands in succession.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Options                                      | <b>lcc <i>number</i></b> —(TX Matrix and TX Matrix Plus router only) (Optional) On a TX Matrix router, display the forwarding table configuration for a specific T640 router (or line-card chassis) configured in a routing matrix. On a TX Matrix Plus router, display the forwarding table configuration for a specific T1600 router (or line-card chassis) configured in the routing matrix. Replace <i>number</i> with a value from 0 through 3.                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Required Privilege Level                     | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| List of Sample Output                        | <a href="#">show class-of-service forwarding-table on page 5291</a><br><a href="#">show class-of-service forwarding-table lcc (TX Matrix Plus Router) on page 5291</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Output Fields                                | See the output field descriptions for <b>show class-of-service forwarding-table</b> commands: <ul style="list-style-type: none"><li>• <a href="#">show class-of-service forwarding-table classifier</a></li><li>• <a href="#">show class-of-service forwarding-table classifier mapping</a></li><li>• <a href="#">show class-of-service forwarding-table drop-profile</a></li><li>• <a href="#">show class-of-service forwarding-table fabric scheduler-map</a></li><li>• <a href="#">show class-of-service forwarding-table loss-priority-map</a></li><li>• <a href="#">show class-of-service forwarding-table loss-priority-map mapping</a></li><li>• <a href="#">show class-of-service forwarding-table rewrite-rule</a></li><li>• <a href="#">show class-of-service forwarding-table rewrite-rule mapping</a></li><li>• <a href="#">show class-of-service forwarding-table scheduler-map</a></li></ul> |



## Sample Output

show class-of-service forwarding-table

```

user@host> show class-of-service forwarding-table
Classifier table index: 9, # entries: 8, Table type: EXP
Entry #   Code point   Forwarding-class #   PLP
  0         000         0                   0
  1         001         0                   1
  2         010         1                   0
  3         011         1                   1
  4         100         2                   0
  5         101         2                   1
  6         110         3                   0
  7         111         3                   1

Interface      Index      Table Index/      Q num      Table type
sp-0/0/0.1001   66         11                11         IPv4 precedence
sp-0/0/0.2001   67         11                11         IPv4 precedence
sp-0/0/0.16383  68         11                11         IPv4 precedence
fe-0/0/0.0      69         11                11         IPv4 precedence

Interface: sp-0/0/0 (Index: 129, Map index: 2, Map type: FINAL,
Num of queues: 2):
  Entry 0 (Scheduler index: 16, Forwarding-class #: 0):
    Tx rate: 0 Kb (95%), Buffer size: 95 percent
  Priority low
    PLP high: 1, PLP low: 1, PLP medium-high: 1, PLP medium-low: 1
  Entry 1 (Scheduler index: 18, Forwarding-class #: 3):
    Tx rate: 0 Kb (5%), Buffer size: 5 percent
  Priority low
    PLP high: 1, PLP low: 1, PLP medium-high: 1, PLP medium-low: 1

Interface: fe-0/0/0 (Index: 137, Map index: 2, Map type: FINAL,
Num of queues: 2):
  Entry 0 (Scheduler index: 16, Forwarding-class #: 0):
    Tx rate: 0 Kb (95%), Buffer size: 95 percent
  Priority low
    PLP high: 1, PLP low: 1, PLP medium-high: 1, PLP medium-low: 1
  Entry 1 (Scheduler index: 18, Forwarding-class #: 3):
    Tx rate: 0 Kb (5%), Buffer size: 5 percent
  Priority low
    PLP high: 1, PLP low: 1, PLP medium-high: 1, PLP medium-low: 1

Interface: fe-0/0/1 (Index: 138, Map index: 2, Map type: FINAL,
Num of queues: 2):
  Entry 0 (Scheduler index: 16, Forwarding-class #: 0):
    Tx rate: 0 Kb (95%), Buffer size: 95 percent
  Priority low
    PLP high: 1, PLP low: 1, PLP medium-high: 1, PLP medium-low: 1
  Entry 1 (Scheduler index: 18, Forwarding-class #: 3):
    Tx rate: 0 Kb (5%), Buffer size: 5 percent
  Priority low
    PLP high: 1, PLP low: 1, PLP medium-high: 1, PLP medium-low: 1

...

RED drop profile index: 1, # entries: 1
Drop
Entry      Fullness(%)  Probability(%)
  0          100          100

```



show class-of-service  
forwarding-table lcc  
(TX Matrix Plus  
Router)

```
user@host> show class-of-service forwarding-table lcc 0
lcc0-re0:
```

-----

Classifier table index: 9, # entries: 64, Table type: IPv6 DSCP

| Entry # | Code point | Forwarding-class # | PLP |
|---------|------------|--------------------|-----|
| 0       | 000000     | 0                  | 0   |
| 1       | 000001     | 0                  | 0   |
| 2       | 000010     | 0                  | 0   |
| 3       | 000011     | 0                  | 0   |
| 4       | 000100     | 0                  | 0   |
| 5       | 000101     | 0                  | 0   |
| 6       | 000110     | 0                  | 0   |
| 7       | 000111     | 0                  | 0   |
| 8       | 001000     | 0                  | 0   |
| 9       | 001001     | 0                  | 0   |
| 10      | 001010     | 0                  | 0   |
| 11      | 001011     | 0                  | 0   |
| 12      | 001100     | 0                  | 0   |
| 13      | 001101     | 0                  | 0   |
| 14      | 001110     | 0                  | 0   |
| 15      | 001111     | 0                  | 0   |
| 16      | 010000     | 0                  | 0   |
| 17      | 010001     | 0                  | 0   |
| 18      | 010010     | 0                  | 0   |
| 19      | 010011     | 0                  | 0   |
| 20      | 010100     | 0                  | 0   |
| 21      | 010101     | 0                  | 0   |
| 22      | 010110     | 0                  | 0   |
| 23      | 010111     | 0                  | 0   |
| 24      | 011000     | 0                  | 0   |
| 25      | 011001     | 0                  | 0   |
| 26      | 011010     | 0                  | 0   |
| 27      | 011011     | 0                  | 0   |
| 28      | 011100     | 0                  | 0   |
| 29      | 011101     | 0                  | 0   |
| 30      | 011110     | 0                  | 0   |
| 31      | 011111     | 0                  | 0   |
| 32      | 100000     | 0                  | 0   |
| 33      | 100001     | 0                  | 0   |
| 34      | 100010     | 0                  | 0   |
| 35      | 100011     | 0                  | 0   |
| 36      | 100100     | 0                  | 0   |
| 37      | 100101     | 0                  | 0   |
| 38      | 100110     | 0                  | 0   |
| 39      | 100111     | 0                  | 0   |
| 40      | 101000     | 0                  | 0   |
| 41      | 101001     | 0                  | 0   |
| 42      | 101010     | 0                  | 0   |
| 43      | 101011     | 0                  | 0   |
| 44      | 101100     | 0                  | 0   |
| 45      | 101101     | 0                  | 0   |
| 46      | 101110     | 0                  | 0   |

...



## show class-of-service forwarding-table classifier

|                                 |                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show class-of-service forwarding-table classifier                                                                                                                                                                    |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                   |
| <b>Description</b>              | Display the mapping of code point value to queue number and loss priority for each classifier as it exists in the forwarding table.                                                                                  |
| <b>Options</b>                  | This command has no options.                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                 |
| <b>List of Sample Output</b>    | <a href="#">show class-of-service forwarding-table classifier on page 5294</a>                                                                                                                                       |
| <b>Output Fields</b>            | <a href="#">Table 454 on page 5293</a> describes the output fields for the <b>show class-of-service forwarding-table classifier</b> command. Output fields are listed in the approximate order in which they appear. |

**Table 454: show class-of-service forwarding-table classifier Output Fields**

| Field Name                    | Field Description                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Classifier table index</b> | Index of the classifier table.                                                                                                                                                                                                                                                                                                                                                   |
| <b>entries</b>                | Total number of entries.                                                                                                                                                                                                                                                                                                                                                         |
| <b>Table type</b>             | Type of code points in the table: <b>DSCP</b> , <b>EXP</b> (not on the QFX Series), <b>IEEE 802.1</b> , <b>IPv4 precedence</b> (not on the QFX Series), or <b>IPv6 DSCP</b> .                                                                                                                                                                                                    |
| <b>Entry #</b>                | Entry number.                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Code point</b>             | Code point value used for classification.                                                                                                                                                                                                                                                                                                                                        |
| <b>Forwarding-class #</b>     | Forwarding class to which the code point is assigned.                                                                                                                                                                                                                                                                                                                            |
| <b>PLP</b>                    | Packet loss priority value set by classification. For most platforms, the value can be <b>0</b> or <b>1</b> . For some platforms, the value is <b>0</b> , <b>1</b> , <b>2</b> , or <b>3</b> . The value <b>0</b> represents low PLP. The value <b>1</b> represents <b>high</b> PLP. The value <b>2</b> represents medium-low PLP. The value <b>3</b> represents medium-high PLP. |



## Sample Output

```
show class-of-service forwarding-table classifier
Classifier table index: 62436, # entries: 64, Table type: DSCP
```

| Entry # | Code point | Forwarding-class # | PLP |
|---------|------------|--------------------|-----|
| 0       | 000000     | 0                  | 0   |
| 1       | 000001     | 0                  | 0   |
| 2       | 000010     | 0                  | 0   |
| 3       | 000011     | 0                  | 0   |
| 4       | 000100     | 0                  | 0   |
| 5       | 000101     | 0                  | 0   |
| 6       | 000110     | 0                  | 0   |
| 7       | 000111     | 0                  | 0   |
| 8       | 001000     | 0                  | 0   |
| 9       | 001001     | 0                  | 0   |
| 10      | 001010     | 1                  | 1   |
| 11      | 001011     | 0                  | 0   |
| ...     |            |                    |     |
| 60      | 111100     | 0                  | 0   |
| 61      | 111101     | 0                  | 0   |
| 62      | 111110     | 0                  | 0   |
| 63      | 111111     | 0                  | 0   |



## show class-of-service forwarding-table classifier mapping

|                                 |                                                                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show class-of-service forwarding-table classifier mapping                                                                                                                                                                    |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                           |
| <b>Description</b>              | For each logical interface, display either the table index of the classifier for a given code point type or the queue number (if it is a fixed classification) in the forwarding table.                                      |
| <b>Options</b>                  | This command has no options.                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                         |
| <b>List of Sample Output</b>    | <a href="#">show class-of-service forwarding-table classifier mapping on page 5295</a>                                                                                                                                       |
| <b>Output Fields</b>            | <a href="#">Table 455 on page 5295</a> describes the output fields for the <b>show class-of-service forwarding-table classifier mapping</b> command. Output fields are listed in the approximate order in which they appear. |

**Table 455: show class-of-service forwarding-table classifier mapping Output Fields**

| Field Name         | Field Description                                                                                                                                                                            |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Table index/ Q num | If the table type is <b>Fixed</b> , the number of the queue to which the interface is mapped. For all other types, this value is the classifier index number.                                |
| Interface          | Name of the logical interface. This field can also show the physical interface (QFX Series).                                                                                                 |
| Index              | Logical interface index.                                                                                                                                                                     |
| Table type         | Type of code points in the table: <b>DSCP</b> , <b>EXP</b> (not on the QFX Series), <b>Fixed</b> , <b>IEEE 802.1</b> , <b>IPv4 precedence</b> (not on the QFX Series), or <b>IPv6 DSCP</b> . |

## Sample Output

```

show class-of-service forwarding-table classifier mapping user@host> show class-of-service forwarding-table classifier mapping
Table index/
Interface      Index  Q num  Table type
so-5/0/0.0     10     62436  DSCP
so-0/1/0.0     11     62436  DSCP
so-0/2/0.0     12      1     Fixed
so-0/2/1.0     13     62436  DSCP
so-0/2/1.0     13     62437  IEEE 802.1
so-0/2/2.0     14     62436  DSCP
so-0/2/2.0     14     62438  IPv4 precedence

```



## show class-of-service forwarding-table drop-profile

|                                 |                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show class-of-service forwarding-table drop-profile                                                                                                                                                                    |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                     |
| <b>Description</b>              | Display the data points of all random early detection (RED) drop profiles as they exist in the forwarding table.                                                                                                       |
| <b>Options</b>                  | This command has no options.                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                   |
| <b>List of Sample Output</b>    | <a href="#">show class-of-service forwarding-table drop-profile on page 5297</a>                                                                                                                                       |
| <b>Output Fields</b>            | <a href="#">Table 456 on page 5296</a> describes the output fields for the <b>show class-of-service forwarding-table drop-profile</b> command. Output fields are listed in the approximate order in which they appear. |

**Table 456: show class-of-service forwarding-table drop-profile Output Fields**

| Field Name             | Field Description                                         |
|------------------------|-----------------------------------------------------------|
| RED drop profile index | Index of this drop profile.                               |
| # entries              | Number of entries in a particular RED drop profile index. |
| Entry                  | Drop profile entry number.                                |
| Fullness(%)            | Percentage fullness of a queue.                           |
| Drop probability(%)    | Drop probability at this fill level.                      |



## Sample Output

show class-of-service  
forwarding-table  
drop-profile

user@host> show class-of-service forwarding-table drop-profile

RED drop profile index: 4, # entries: 1

| Entry | Fullness(%) | Drop<br>Probability(%) |
|-------|-------------|------------------------|
| 0     | 100         | 100                    |

RED drop profile index: 8742, # entries: 3

| Entry | Fullness(%) | Drop<br>Probability(%) |
|-------|-------------|------------------------|
| 0     | 10          | 10                     |
| 1     | 20          | 20                     |
| 2     | 30          | 30                     |

RED drop profile index: 24627, # entries: 64

| Entry | Fullness(%) | Drop<br>Probability(%) |
|-------|-------------|------------------------|
| 0     | 0           | 0                      |
| 1     | 1           | 1                      |
| 2     | 2           | 2                      |
| 3     | 4           | 4                      |
| ...   |             |                        |
| 61    | 98          | 99                     |
| 62    | 99          | 99                     |
| 63    | 100         | 100                    |

RED drop profile index: 25393, # entries: 64

| Entry | Fullness(%) | Drop<br>Probability(%) |
|-------|-------------|------------------------|
| 0     | 0           | 0                      |
| 1     | 1           | 1                      |
| 2     | 2           | 2                      |
| 3     | 4           | 4                      |
| ...   |             |                        |
| 61    | 98          | 98                     |
| 62    | 99          | 99                     |
| 63    | 100         | 100                    |



## show class-of-service forwarding-table rewrite-rule

|                                 |                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show class-of-service forwarding-table rewrite-rule                                                                                                                                                                    |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                     |
| <b>Description</b>              | Display mapping of queue number and loss priority to code point value for each rewrite rule as it exists in the forwarding table.                                                                                      |
| <b>Options</b>                  | This command has no options.                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                   |
| <b>List of Sample Output</b>    | <a href="#">show class-of-service forwarding-table rewrite-rule on page 5299</a>                                                                                                                                       |
| <b>Output Fields</b>            | <a href="#">Table 457 on page 5298</a> describes the output fields for the <b>show class-of-service forwarding-table rewrite-rule</b> command. Output fields are listed in the approximate order in which they appear. |

**Table 457: show class-of-service forwarding-table rewrite-rule Output Fields**

| Field Name                 | Field Description                                                                                                                                                                                                                                             |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Rewrite table index</b> | Index for this rewrite rule.                                                                                                                                                                                                                                  |
| <b># entries</b>           | Number of entries in this rewrite rule.                                                                                                                                                                                                                       |
| <b>Table type</b>          | Type of table: <b>DSCP</b> , <b>EXP</b> (not on the QFX Series), <b>EXP-PUSH-3</b> (not on the QFX Series), <b>EXP-SWAP-PUSH-2</b> , (J Series routers only), <b>IEEE 802.1,IPv4 precedence</b> (not on the QFX Series), <b>IPv6 DSCP</b> , or <b>Fixed</b> . |
| <b>Q#</b>                  | Queue number to which this entry is assigned.                                                                                                                                                                                                                 |
| <b>Low bits</b>            | Code point value for low-priority loss profile.                                                                                                                                                                                                               |
| <b>State</b>               | State of this code point: <b>enabled</b> , <b>rewritten</b> , or <b>disabled</b> .                                                                                                                                                                            |
| <b>High bits</b>           | Code point value for high-priority loss profile.                                                                                                                                                                                                              |



## Sample Output

```
show class-of-service forwarding-table rewrite-rule
user@host> show class-of-service forwarding-table rewrite-rule
Rewrite table index: 3753, # entries: 4, Table type: DSCP
Q#      Low bits  State      High bits  State
0       000111   Enabled    001010     Enabled
2       000000   Disabled   001100     Enabled
1       101110   Enabled    110111     Enabled
3       110000   Enabled    111000     Enabled
```



## show class-of-service forwarding-table rewrite-rule mapping

|                                 |                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show class-of-service forwarding-table rewrite-rule mapping                                                                                                                                                                    |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                             |
| <b>Description</b>              | For each logical interface, display the table identifier of the rewrite rule map for each code point type.                                                                                                                     |
| <b>Options</b>                  | This command has no options.                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                           |
| <b>List of Sample Output</b>    | <a href="#">show class-of-service forwarding-table rewrite-rule mapping on page 5300</a>                                                                                                                                       |
| <b>Output Fields</b>            | <a href="#">Table 458 on page 5300</a> describes the output fields for the <b>show class-of-service forwarding-table rewrite-rule mapping</b> command. Output fields are listed in the approximate order in which they appear. |

**Table 458: show class-of-service forwarding-table rewrite-rule mapping Output Fields**

| Field Name         | Field Description                                                                                                                                                                                                                                                                                                        |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Interface</b>   | Name of the logical interface. This field can also show the physical interface (QFX Series).                                                                                                                                                                                                                             |
| <b>Index</b>       | Logical interface index.                                                                                                                                                                                                                                                                                                 |
| <b>Table index</b> | Rewrite table index.                                                                                                                                                                                                                                                                                                     |
| <b>Type</b>        | Type of classifier: <b>DSCP</b> , <b>EXP</b> (not on the QFX Series), <b>EXP-PUSH-3</b> (not on the QFX Series), <b>EXP-SWAP-PUSH-2</b> (not on the QFX Series), <b>Frame-Relay DE</b> (J Series routers only), <b>IEEE 802.1</b> , <b>IPv4 precedence</b> (not on the QFX Series), <b>IPv6 DSCP</b> , or <b>Fixed</b> . |

## Sample Output

```

show class-of-service forwarding-table rewrite-rule mapping
user@host> show class-of-service forwarding-table rewrite-rule mapping
Interface      Index  Table index  Type
so-5/0/0.0     10     3753        DSCP
so-0/1/0.0     11     3753        DSCP
so-0/2/0.0     12     3753        DSCP
so-0/2/1.0     13     3753        DSCP
so-0/2/2.0     14     3753        DSCP
so-0/2/3.0     15     3753        DSCP

```



## show class-of-service forwarding-table scheduler-map

|                                 |                                                                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show class-of-service forwarding-table scheduler-map                                                                                                                                                                    |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                      |
| <b>Description</b>              | For each physical interface, display the scheduler map information as it exists in the forwarding table.                                                                                                                |
| <b>Options</b>                  | This command has no options.                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                    |
| <b>List of Sample Output</b>    | <a href="#">show class-of-service forwarding-table scheduler-map on page 5302</a>                                                                                                                                       |
| <b>Output Fields</b>            | <a href="#">Table 459 on page 5301</a> describes the output fields for the <b>show class-of-service forwarding-table scheduler-map</b> command. Output fields are listed in the approximate order in which they appear. |

**Table 459: show class-of-service forwarding-table scheduler-map Output Fields**

| Field Name         | Field Description                                                                                                                                                                                                                                                                           |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Interface          | Name of the physical interface.                                                                                                                                                                                                                                                             |
| Index              | Physical interface index.                                                                                                                                                                                                                                                                   |
| Map index          | Scheduler map index.                                                                                                                                                                                                                                                                        |
| Num of queues      | Number of queues defined in this scheduler map.                                                                                                                                                                                                                                             |
| Entry              | Number of this entry in the scheduler map.                                                                                                                                                                                                                                                  |
| Scheduler index    | Scheduler policy index.                                                                                                                                                                                                                                                                     |
| Forwarding-class # | Forwarding class number to which this entry is applied.                                                                                                                                                                                                                                     |
| Tx rate            | Configured transmit rate of the scheduler (in bps). The rate is a percentage of the total interface bandwidth, or the keyword <b>remainder</b> , which indicates that the scheduler receives the remaining bandwidth of the interface.                                                      |
| Max buffer delay   | Amount of transmit delay (in milliseconds) or buffer size of the queue. This amount is a percentage of the total interface buffer allocation or the keyword <b>remainder</b> , which indicates that the buffer is sized according to what remains after other scheduler buffer allocations. |
| Priority           | <ul style="list-style-type: none"> <li><b>high</b>—Queue priority is high.</li> <li><b>low</b>—Queue priority is low.</li> </ul>                                                                                                                                                            |
| PLP high           | Drop profile index for a high packet loss priority profile.                                                                                                                                                                                                                                 |



Table 459: show class-of-service forwarding-table scheduler-map Output Fields (*continued*)

| Field Name      | Field Description                                                                                           |
|-----------------|-------------------------------------------------------------------------------------------------------------|
| PLP low         | Drop profile index for a low packet loss priority profile.                                                  |
| PLP medium-high | Drop profile index for a medium-high packet loss priority profile.                                          |
| PLP medium-low  | Drop profile index for a medium-low packet loss priority profile.                                           |
| TCP PLP high    | Drop profile index for a high TCP packet loss priority profile.                                             |
| TCP PLP low     | Drop profile index for a low TCP packet loss priority profile.                                              |
| Policy is exact | If this line appears in the output, exact rate limiting is enabled. Otherwise, no rate limiting is enabled. |

## Sample Output

### show class-of-service forwarding-table scheduler-map

```

user@host> show class-of-service forwarding-table scheduler-map
Interface: so-5/0/0 (Index: 9, Map index: 17638, Num of queues: 2):
  Entry 0 (Scheduler index: 6090, Forwarding-class #: 0):
    Tx rate: 0 Kb (30%), Max buffer delay: 39 bytes (0%)
    Priority low
    PLP high: 25393, PLP low: 24627, TCP PLP high: 25393, TCP PLP low: 8742
    Policy is exact
  Entry 1 (Scheduler index: 38372, Forwarding-class #: 1):
    Traffic chunk: Max = 0 bytes, Min = 0 bytes
    Tx rate: 0 Kb (40%), Max buffer delay: 68 bytes (0%)
    Priority high
    PLP high: 25393, PLP low: 24627, TCP PLP high: 25393, TCP PLP low: 8742

Interface: at-6/1/0 (Index: 10, Map index: 17638, Num of queues: 2):
  Entry 0 (Scheduler index: 6090, Forwarding-class #: 0):
    Traffic chunk: Max = 0 bytes, Min = 0 bytes
    Tx rate: 0 Kb (30%), Max buffer delay: 39 bytes (0%)
    Priority high
    PLP high: 25393, PLP low: 24627, TCP PLP high: 25393, TCP PLP low: 8742
  Entry 1 (Scheduler index: 38372, Forwarding-class #: 1):
    Traffic chunk: Max = 0 bytes, Min = 0 bytes
    Tx rate: 0 Kb (40%), Max buffer delay: 68 bytes (0%)
    Priority low
    PLP high: 25393, PLP low: 24627, TCP PLP high: 25393, TCP PLP low: 8742

```



## show class-of-service interface

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show class-of-service interface<br><detail   comprehensive> <interface-name>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Forwarding class map information added in Junos OS Release 9.4.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 12.1 for the PTX Series Packet Transport Switches.</p> <p>Command introduced in Junos OS Release 12.2 for the ACX Series Universal Access routers.</p> <p>Options <b>detail</b> and <b>comprehensive</b> introduced in Junos OS Release 11.4.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Display the logical and physical interface associations for the classifier, rewrite rules, and scheduler map objects.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>                  | <p><b>comprehensive</b>—(M Series, MX Series, and T Series routers) (Optional) Display comprehensive quality-of-service (QoS) information about all physical and logical interfaces.</p> <p><b>detail</b>—(M Series, MX Series, and T Series routers) (Optional) Display QoS and CoS information based on the interface.</p> <p>If the <b>interface</b> <i>interface-name</i> is a physical interface, the output includes:</p> <ul style="list-style-type: none"> <li>• Brief QoS information about the physical interface</li> <li>• Brief QoS information about the logical interface</li> <li>• CoS information about the physical interface</li> <li>• Brief information about filters or policers of the logical interface</li> <li>• Brief CoS information about the logical interface</li> </ul> <p>If the <b>interface</b> <i>interface-name</i> is a logical interface, the output includes:</p> <ul style="list-style-type: none"> <li>• Brief QoS information about the logical interface</li> <li>• Information about filters or policers for the logical interface</li> <li>• CoS information about the logical interface</li> </ul> <p><b>interface-name</b>—(Optional) Display class-of-service (CoS) associations for the specified interface.</p> <p><b>none</b>—Display CoS associations for all physical and logical interfaces.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>List of Sample Output</b>    | <a href="#">show class-of-service interface (Physical) on page 5315</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



[show class-of-service interface \(Logical\) on page 5315](#)  
[show class-of-service interface \(Gigabit Ethernet\) on page 5315](#)  
[show class-of-service interface \(PPPoE Interface\) on page 5315](#)  
[show class-of-service interface \(T4000 Routers with Type 5 FPCs\) on page 5315](#)  
[show class-of-service interface detail on page 5316](#)  
[show class-of-service interface comprehensive on page 5316](#)  
[show class-of-service interface \(ACX Series Routers\) on page 5326](#)

**Output Fields** Table 460 on page 5304 describes the output fields for the **show class-of-service interface** command. Output fields are listed in the approximate order in which they appear.

**Table 460: show class-of-service interface Output Fields**

| Field Name                              | Field Description                                                                                                                                                                                                                                                                             |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Physical interface</b>               | Name of a physical interface.                                                                                                                                                                                                                                                                 |
| <b>Index</b>                            | Index of this interface or the internal index of this object.                                                                                                                                                                                                                                 |
| <b>Dedicated Queues</b>                 | Status of dedicated queues configured on an interface. Supported only on Trio MPC/MIC interfaces on MX Series routers.                                                                                                                                                                        |
| <b>Queues supported</b>                 | Number of queues you can configure on the interface.                                                                                                                                                                                                                                          |
| <b>Queues in use</b>                    | Number of queues currently configured.                                                                                                                                                                                                                                                        |
| <b>Total non-default queues created</b> | Number of queues created in addition to the default queues. Supported only on Trio MPC/MIC interfaces on MX Series routers.                                                                                                                                                                   |
| <b>Rewrite Input IEEE Code-point</b>    | (QFX Series only) IEEE 802.1p code point (priority) rewrite value. Incoming traffic from the Fibre Channel (FC) SAN is classified into the forwarding class specified in the native FC interface (NP_Port) fixed classifier and uses the priority specified as the IEEE 802.1p rewrite value. |
| <b>Shaping rate</b>                     | Maximum transmission rate on the physical interface. You can configure the shaping rate on the physical interface, or on the logical interface, but not on both. Therefore, the <b>Shaping rate</b> field is displayed for either the physical interface or the logical interface.            |
| <b>Scheduler map</b>                    | Name of the output scheduler map associated with this interface.                                                                                                                                                                                                                              |
| <b>Input shaping rate</b>               | For Gigabit Ethernet IQ2 PICs, maximum transmission rate on the input interface.                                                                                                                                                                                                              |
| <b>Input scheduler map</b>              | For Gigabit Ethernet IQ2 PICs, name of the input scheduler map associated with this interface.                                                                                                                                                                                                |
| <b>Chassis scheduler map</b>            | Name of the scheduler map associated with the packet forwarding component queues.                                                                                                                                                                                                             |
| <b>Rewrite</b>                          | Name and type of the rewrite rules associated with this interface.                                                                                                                                                                                                                            |
| <b>Classifier</b>                       | Name and type of classifiers associated with this interface.                                                                                                                                                                                                                                  |
| <b>Forwarding-class-map</b>             | Name of the forwarding map associated with this interface.                                                                                                                                                                                                                                    |
| <b>Congestion-notification</b>          | (QFX Series only) Congestion notification state, <b>enabled</b> or <b>disabled</b> .                                                                                                                                                                                                          |



Table 460: show class-of-service interface Output Fields (*continued*)

| Field Name               | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Logical interface</b> | Name of a logical interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Object</b>            | Category of an object: <b>Classifier</b> , <b>Fragmentation-map</b> (for LSQ interfaces only), <b>Scheduler-map</b> , <b>Rewrite</b> , or <b>Translation Table</b> (for IQE PICs only).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Name</b>              | Name of an object.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Type</b>              | Type of an object: <b>dscp</b> , <b>dscp-ipv6</b> , <b>exp</b> , <b>ieee-802.1</b> , <b>ip</b> , or <b>inet-precedence</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Link-level type</b>   | Encapsulation on the physical interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>MTU</b>               | MTU size on the physical interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Speed</b>             | Speed at which the interface is running.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Loopback</b>          | Whether loopback is enabled and the type of loopback.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Source filtering</b>  | Whether source filtering is enabled or disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Flow control</b>      | Whether flow control is enabled or disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Auto-negotiation</b>  | (Gigabit Ethernet interfaces) Whether autonegotiation is enabled or disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Remote-fault</b>      | (Gigabit Ethernet interfaces) Remote fault status. <ul style="list-style-type: none"> <li>• <b>Online</b>—Autonegotiation is manually configured as online.</li> <li>• <b>Offline</b>—Autonegotiation is manually configured as offline.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Device flags</b>      | The <b>Device flags</b> field provides information about the physical device and displays one or more of the following values: <ul style="list-style-type: none"> <li>• <b>Down</b>—Device has been administratively disabled.</li> <li>• <b>Hear-Own-Xmit</b>—Device receives its own transmissions.</li> <li>• <b>Link-Layer-Down</b>—The link-layer protocol has failed to connect with the remote endpoint.</li> <li>• <b>Loopback</b>—Device is in physical loopback.</li> <li>• <b>Loop-Detected</b>—The link layer has received frames that it sent, thereby detecting a physical loopback.</li> <li>• <b>No-Carrier</b>—On media that support carrier recognition, no carrier is currently detected.</li> <li>• <b>No-Multicast</b>—Device does not support multicast traffic.</li> <li>• <b>Present</b>—Device is physically present and recognized.</li> <li>• <b>Promiscuous</b>—Device is in promiscuous mode and recognizes frames addressed to all physical addresses on the media.</li> <li>• <b>Quench</b>—Transmission on the device is quenched because the output buffer is overflowing.</li> <li>• <b>Recv-All-Multicasts</b>—Device is in multicast promiscuous mode and therefore provides no multicast filtering.</li> <li>• <b>Running</b>—Device is active and enabled.</li> </ul> |



Table 460: show class-of-service interface Output Fields (*continued*)

| Field Name             | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Interface flags</b> | <p>The <b>Interface flags</b> field provides information about the physical interface and displays one or more of the following values:</p> <ul style="list-style-type: none"> <li>• <b>Admin-Test</b>—Interface is in test mode and some sanity checking, such as loop detection, is disabled.</li> <li>• <b>Disabled</b>—Interface is administratively disabled.</li> <li>• <b>Down</b>—A hardware failure has occurred.</li> <li>• <b>Hardware-Down</b>—Interface is nonfunctional or incorrectly connected.</li> <li>• <b>Link-Layer-Down</b>—Interface keepalives have indicated that the link is incomplete.</li> <li>• <b>No-Multicast</b>—Interface does not support multicast traffic.</li> <li>• <b>No-receive No-transmit</b>—Passive monitor mode is configured on the interface.</li> <li>• <b>Point-To-Point</b>—Interface is point-to-point.</li> <li>• <b>Pop all MPLS labels from packets of depth</b>—MPLS labels are removed as packets arrive on an interface that has the <b>pop-all-labels</b> statement configured. The depth value can be one of the following: <ul style="list-style-type: none"> <li>• <b>1</b>—Takes effect for incoming packets with one label only.</li> <li>• <b>2</b>—Takes effect for incoming packets with two labels only.</li> <li>• <b>[ 1 2 ]</b>—Takes effect for incoming packets with either one or two labels.</li> </ul> </li> <li>• <b>Promiscuous</b>—Interface is in promiscuous mode and recognizes frames addressed to all physical addresses.</li> <li>• <b>Recv-All-Multicasts</b>—Interface is in multicast promiscuous mode and provides no multicast filtering.</li> <li>• <b>SNMP-Traps</b>—SNMP trap notifications are enabled.</li> <li>• <b>Up</b>—Interface is enabled and operational.</li> </ul> |
| <b>Flags</b>           | <p>The <b>Logical interface flags</b> field provides information about the logical interface and displays one or more of the following values:</p> <ul style="list-style-type: none"> <li>• <b>ACFC Encapsulation</b>—Address control field Compression (ACFC) encapsulation is enabled (negotiated successfully with a peer).</li> <li>• <b>Device-down</b>—Device has been administratively disabled.</li> <li>• <b>Disabled</b>—Interface is administratively disabled.</li> <li>• <b>Down</b>—A hardware failure has occurred.</li> <li>• <b>Clear-DF-Bit</b>—GRE tunnel or IPsec tunnel is configured to clear the Don't Fragment (DF) bit.</li> <li>• <b>Hardware-Down</b>—Interface protocol initialization failed to complete successfully.</li> <li>• <b>PFC</b>—Protocol field compression is enabled for the PPP session.</li> <li>• <b>Point-To-Point</b>—Interface is point-to-point.</li> <li>• <b>SNMP-Traps</b>—SNMP trap notifications are enabled.</li> <li>• <b>Up</b>—Interface is enabled and operational.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Encapsulation</b>   | Encapsulation on the logical interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Admin</b>           | Administrative state of the interface ( <b>Up</b> or <b>Down</b> ).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Link</b>            | Status of physical link ( <b>Up</b> or <b>Down</b> ).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Proto</b>           | Protocol configured on the interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |



Table 460: show class-of-service interface Output Fields (*continued*)

| Field Name                     | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Input Filter</b>            | Names of any firewall filters to be evaluated when packets are received on the interface, including any filters attached through activation of dynamic service.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Output Filter</b>           | Names of any firewall filters to be evaluated when packets are transmitted on the interface, including any filters attached through activation of dynamic service.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Link flags</b>              | Provides information about the physical link and displays one or more of the following values: <ul style="list-style-type: none"> <li>• <b>ACFC</b>—Address control field compression is configured. The Point-to-Point Protocol (PPP) session negotiates the ACFC option.</li> <li>• <b>Give-Up</b>—Link protocol does not continue connection attempts after repeated failures.</li> <li>• <b>Loose-LCP</b>—PPP does not use the Link Control Protocol (LCP) to indicate whether the link protocol is operational.</li> <li>• <b>Loose-LMI</b>—Frame Relay does not use the Local Management Interface (LMI) to indicate whether the link protocol is operational.</li> <li>• <b>Loose-NCP</b>—PPP does not use the Network Control Protocol (NCP) to indicate whether the device is operational.</li> <li>• <b>Keepalives</b>—Link protocol keepalives are enabled.</li> <li>• <b>No-Keepalives</b>—Link protocol keepalives are disabled.</li> <li>• <b>PFC</b>—Protocol field compression is configured. The PPP session negotiates the PFC option.</li> </ul> |
| <b>Hold-times</b>              | Current interface hold-time up and hold-time down, in milliseconds.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>CoS queues</b>              | Number of CoS queues configured.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Last flapped</b>            | Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: year-month-day hour:minute:second:timezone (hour:minute:second ago)</b> . For example, <b>Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago)</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Statistics last cleared</b> | Number and rate of bytes and packets received and transmitted on the physical interface. <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>IPv6 transit statistics</b> | Number of IPv6 transit bytes and packets received and transmitted on the logical interface if IPv6 statistics tracking is enabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



Table 460: show class-of-service interface Output Fields (*continued*)

| Field Name           | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Input errors</b>  | <p>Input errors on the interface. The labels are explained in the following list:</p> <ul style="list-style-type: none"> <li>• <b>Errors</b>—Sum of the incoming frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the input queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Framing errors</b>—Number of packets received with an invalid frame checksum (FCS).</li> <li>• <b>Runts</b>—Number of frames received that are smaller than the runt threshold.</li> <li>• <b>Giants</b>—Number of frames received that are larger than the giant threshold.</li> <li>• <b>Bucket Drops</b>—Drops resulting from the traffic load exceeding the interface transmit or receive leaky bucket configuration.</li> <li>• <b>Policed discards</b>—Number of frames that the incoming packet match code discarded because they were not recognized or not of interest. Usually, this field reports protocols that Junos OS does not handle.</li> <li>• <b>L3 incompletes</b>—Number of incoming packets discarded because they failed Layer 3 (usually IPv4) sanity checks of the header. For example, a frame with less than 20 bytes of available IP header is discarded. Layer 3 incomplete errors can be ignored by configuring the <b>ignore-l3-incompletes</b> statement.</li> <li>• <b>L2 channel errors</b>—Number of times the software did not find a valid logical interface for an incoming frame.</li> <li>• <b>L2 mismatch timeouts</b>—Number of malformed or short packets that caused the incoming packet handler to discard the frame as unreadable.</li> <li>• <b>HS link CRC errors</b>—Number of errors on the high-speed links between the ASICs responsible for handling the router interfaces.</li> <li>• <b>HS link FIFO overflows</b>—Number of FIFO overflows on the high-speed links between the ASICs responsible for handling the router interfaces.</li> </ul> |
| <b>Output errors</b> | <p>Output errors on the interface. The labels are explained in the following list:</p> <ul style="list-style-type: none"> <li>• <b>Carrier transitions</b>—Number of times the interface has gone from <b>down</b> to <b>up</b>. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and up, or another problem occurs. If the number of carrier transitions increments quickly (perhaps once every 10 seconds), the cable, the far-end system, or the PIC is malfunctioning.</li> <li>• <b>Errors</b>—Sum of the outgoing frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Aged packets</b>—Number of packets that remained in shared packet SDRAM so long that the system automatically purged them. The value in this field should never increment. If it does, it is most likely a software bug or possibly malfunctioning hardware.</li> <li>• <b>HS link FIFO underflows</b>—Number of FIFO underflows on the high-speed links between the ASICs responsible for handling the router interfaces.</li> <li>• <b>MTU errors</b>—Number of packets whose size exceeds the MTU of the interface.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Egress queues</b> | Total number of egress queues supported on the specified interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |



Table 460: show class-of-service interface Output Fields (*continued*)

| Field Name                                  | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Queue counters</b>                       | CoS queue number and its associated user-configured forwarding class name. <ul style="list-style-type: none"> <li>• <b>Queued packets</b>—Number of queued packets.</li> <li>• <b>Transmitted packets</b>—Number of transmitted packets.</li> <li>• <b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>SONET alarms</b><br><b>SONET defects</b> | (SONET) SONET media-specific alarms and defects that prevent the interface from passing packets. When a defect persists for a certain period, it is promoted to an alarm. Based on the router configuration, an alarm can ring the red or yellow alarm bell on the router or light the red or yellow alarm LED on the craft interface. See these fields for possible alarms and defects: <b>SONET PHY</b> , <b>SONET section</b> , <b>SONET line</b> , and <b>SONET path</b> .                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>SONET PHY</b>                            | Counts of specific SONET errors with detailed information. <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. A state other than <b>OK</b> indicates a problem.</li> </ul> <p>The <b>SONET PHY</b> field has the following subfields:</p> <ul style="list-style-type: none"> <li>• <b>PLL Lock</b>—Phase-locked loop</li> <li>• <b>PHY Light</b>—Loss of optical signal</li> </ul>                                                                                                                                                                                                                                                                                        |
| <b>SONET section</b>                        | Counts of specific SONET errors with detailed information. <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. A state other than <b>OK</b> indicates a problem.</li> </ul> <p>The <b>SONET section</b> field has the following subfields:</p> <ul style="list-style-type: none"> <li>• <b>BIP-BI</b>—Bit interleaved parity for SONET section overhead</li> <li>• <b>SEF</b>—Severely errored framing</li> <li>• <b>LOS</b>—Loss of signal</li> <li>• <b>LOF</b>—Loss of frame</li> <li>• <b>ES-S</b>—Errored seconds (section)</li> <li>• <b>SES-S</b>—Severely errored seconds (section)</li> <li>• <b>SEFS-S</b>—Severely errored framing seconds (section)</li> </ul> |



Table 460: show class-of-service interface Output Fields (*continued*)

| Field Name        | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SONET line</b> | <p>Active alarms and defects, plus counts of specific SONET errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. A state other than <b>OK</b> indicates a problem.</li> </ul> <p>The <b>SONET line</b> field has the following subfields:</p> <ul style="list-style-type: none"> <li>• <b>BIP-B2</b>—Bit interleaved parity for SONET line overhead</li> <li>• <b>REI-L</b>—Remote error indication (near-end line)</li> <li>• <b>RDI-L</b>—Remote defect indication (near-end line)</li> <li>• <b>AIS-L</b>—Alarm indication signal (near-end line)</li> <li>• <b>BERR-SF</b>—Bit error rate fault (signal failure)</li> <li>• <b>BERR-SD</b>—Bit error rate defect (signal degradation)</li> <li>• <b>ES-L</b>—Errored seconds (near-end line)</li> <li>• <b>SES-L</b>—Severely errored seconds (near-end line)</li> <li>• <b>UAS-L</b>—Unavailable seconds (near-end line)</li> <li>• <b>ES-LFE</b>—Errored seconds (far-end line)</li> <li>• <b>SES-LFE</b>—Severely errored seconds (far-end line)</li> <li>• <b>UAS-LFE</b>—Unavailable seconds (far-end line)</li> </ul>      |
| <b>SONET path</b> | <p>Active alarms and defects, plus counts of specific SONET errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. A state other than <b>OK</b> indicates a problem.</li> </ul> <p>The <b>SONET path</b> field has the following subfields:</p> <ul style="list-style-type: none"> <li>• <b>BIP-B3</b>—Bit interleaved parity for SONET section overhead</li> <li>• <b>REI-P</b>—Remote error indication</li> <li>• <b>LOP-P</b>—Loss of pointer (path)</li> <li>• <b>AIS-P</b>—Path alarm indication signal</li> <li>• <b>RDI-P</b>—Path remote defect indication</li> <li>• <b>UNEQ-P</b>—Path unequipped</li> <li>• <b>PLM-P</b>—Path payload (signal) label mismatch</li> <li>• <b>ES-P</b>—Errored seconds (near-end STS path)</li> <li>• <b>SES-P</b>—Severely errored seconds (near-end STS path)</li> <li>• <b>UAS-P</b>—Unavailable seconds (near-end STS path)</li> <li>• <b>ES-PFE</b>—Errored seconds (far-end STS path)</li> <li>• <b>SES-PFE</b>—Severely errored seconds (far-end STS path)</li> <li>• <b>UAS-PFE</b>—Unavailable seconds (far-end STS path)</li> </ul> |



Table 460: show class-of-service interface Output Fields (*continued*)

| Field Name                             | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Received SONET overhead                | Values of the received and transmitted SONET overhead: <ul style="list-style-type: none"> <li>• <b>C2</b>—Signal label. Allocated to identify the construction and content of the STS-level SPE and for PDI-P.</li> <li>• <b>F1</b>—Section user channel byte. This byte is set aside for the purposes of users.</li> <li>• <b>K1</b> and <b>K2</b>—These bytes are allocated for APS signaling for the protection of the multiplex section.</li> <li>• <b>J0</b>—Section trace. This byte is defined for STS-1 number 1 of an STS-N signal. Used to transmit a 1-byte fixed-length string or a 16-byte message so that a receiving terminal in a section can verify its continued connection to the intended transmitter.</li> <li>• <b>S1</b>—Synchronization status. The S1 byte is located in the first STS-1 number of an STS-N signal.</li> <li>• <b>Z3</b> and <b>Z4</b>—Allocated for future use.</li> </ul>                                                                                                                                                                    |
| Transmitted SONET overhead             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Received path trace                    | SONET/SDH interfaces allow path trace bytes to be sent inband across the SONET/SDH link. Juniper Networks and other router manufacturers use these bytes to help diagnose misconfigurations and network errors by setting the transmitted path trace message so that it contains the system hostname and name of the physical interface. The received path trace value is the message received from the router at the other end of the fiber. The transmitted path trace value is the message that this router transmits.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Transmitted path trace                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| HDLC configuration                     | Information about the HDLC configuration. <ul style="list-style-type: none"> <li>• <b>Policing bucket</b>—Configured state of the receiving policer.</li> <li>• <b>Shaping bucket</b>—Configured state of the transmitting shaper.</li> <li>• <b>Giant threshold</b>—Giant threshold programmed into the hardware.</li> <li>• <b>Runt threshold</b>—Runt threshold programmed into the hardware.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Packet Forwarding Engine configuration | Information about the configuration of the Packet Forwarding Engine: <ul style="list-style-type: none"> <li>• <b>Destination slot</b>—FPC slot number.</li> <li>• <b>PLP byte</b>—Packet Level Protocol byte.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| CoS information                        | Information about the CoS queue for the physical interface. <ul style="list-style-type: none"> <li>• <b>CoS transmit queue</b>—Queue number and its associated user-configured forwarding class name.</li> <li>• <b>Bandwidth %</b>—Percentage of bandwidth allocated to the queue.</li> <li>• <b>Bandwidth bps</b>—Bandwidth allocated to the queue (in bps).</li> <li>• <b>Buffer %</b>—Percentage of buffer space allocated to the queue.</li> <li>• <b>Buffer usec</b>—Amount of buffer space allocated to the queue, in microseconds. This value is nonzero only if the buffer size is configured in terms of time.</li> <li>• <b>Priority</b>—Queue priority: <b>low</b> or <b>high</b>.</li> <li>• <b>Limit</b>—Displayed if rate limiting is configured for the queue. Possible values are <b>none</b> and <b>exact</b>. If <b>exact</b> is configured, the queue transmits only up to the configured bandwidth, even if excess bandwidth is available. If <b>none</b> is configured, the queue transmits beyond the configured bandwidth if bandwidth is available.</li> </ul> |
| Forwarding classes                     | Total number of forwarding classes supported on the specified interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Egress queues                          | Total number of egress queues supported on the specified interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |



Table 460: show class-of-service interface Output Fields (*continued*)

| Field Name           | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Queue                | Queue number.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Forwarding classes   | Forwarding class name.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Queued Packets       | Number of packets queued to this queue.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Queued Bytes         | Number of bytes queued to this queue. The byte counts vary by PIC type.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Transmitted Packets  | Number of packets transmitted by this queue. When fragmentation occurs on the egress interface, the first set of packet counters shows the postfragmentation values. The second set of packet counters (displayed under the <b>Packet Forwarding Engine Chassis Queues</b> field) shows the prefragmentation values.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Transmitted Bytes    | Number of bytes transmitted by this queue. The byte counts vary by PIC type.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Tail-dropped packets | Number of packets dropped because of tail drop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| RED-dropped packets  | <p>Number of packets dropped because of random early detection (RED).</p> <ul style="list-style-type: none"> <li>(M Series and T Series routers only) On M320 and M120 routers and the T Series routers, the total number of dropped packets is displayed. On all other M Series routers, the output classifies dropped packets into the following categories: <ul style="list-style-type: none"> <li><b>Low, non-TCP</b>—Number of low-loss priority non-TCP packets dropped because of RED.</li> <li><b>Low, TCP</b>—Number of low-loss priority TCP packets dropped because of RED.</li> <li><b>High, non-TCP</b>—Number of high-loss priority non-TCP packets dropped because of RED.</li> <li><b>High, TCP</b>—Number of high-loss priority TCP packets dropped because of RED.</li> </ul> </li> <li>(MX Series routers with enhanced DPCs, and T Series routers with enhanced FPCs only) The output classifies dropped packets into the following categories: <ul style="list-style-type: none"> <li><b>Low</b>—Number of low-loss priority packets dropped because of RED.</li> <li><b>Medium-low</b>—Number of medium-low loss priority packets dropped because of RED.</li> <li><b>Medium-high</b>—Number of medium-high loss priority packets dropped because of RED.</li> <li><b>High</b>—Number of high-loss priority packets dropped because of RED.</li> </ul> </li> </ul> |
| RED-dropped bytes    | <p>Number of bytes dropped because of RED. The byte counts vary by PIC type.</p> <ul style="list-style-type: none"> <li>(M Series and T Series routers only) On M320 and M120 routers and the T Series routers, only the total number of dropped bytes is displayed. On all other M Series routers, the output classifies dropped bytes into the following categories: <ul style="list-style-type: none"> <li><b>Low, non-TCP</b>—Number of low-loss priority non-TCP bytes dropped because of RED.</li> <li><b>Low, TCP</b>—Number of low-loss priority TCP bytes dropped because of RED.</li> <li><b>High, non-TCP</b>—Number of high-loss priority non-TCP bytes dropped because of RED.</li> <li><b>High, TCP</b>—Number of high-loss priority TCP bytes dropped because of RED.</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Transmit rate        | Configured transmit rate of the scheduler. The rate is a percentage of the total interface bandwidth.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |



Table 460: show class-of-service interface Output Fields (*continued*)

| Field Name             | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Rate Limit</b>      | Rate limiting configuration of the queue. Possible values are : <ul style="list-style-type: none"> <li>• <b>None</b>—No rate limit.</li> <li>• <b>exact</b>—Queue transmits at the configured rate.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Buffer size</b>     | Delay buffer size in the queue.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Priority</b>        | Scheduling priority configured as <b>low</b> or <b>high</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Excess Priority</b> | Priority of the excess bandwidth traffic on a scheduler: <b>low</b> , <b>medium-low</b> , <b>medium-high</b> , <b>high</b> , or <b>none</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Drop profiles</b>   | Display the assignment of drop profiles. <ul style="list-style-type: none"> <li>• <b>Loss priority</b>—Packet loss priority for drop profile assignment.</li> <li>• <b>Protocol</b>—Transport protocol for drop profile assignment.</li> <li>• <b>Index</b>—Index of the indicated object. Objects that have indexes in this output include schedulers and drop profiles.</li> <li>• <b>Name</b>—Name of the drop profile.</li> <li>• <b>Type</b>—Type of the drop profile: <b>discrete</b> or <b>interpolated</b>.</li> <li>• <b>Fill Level</b>—Percentage fullness of a queue.</li> <li>• <b>Drop probability</b>—Drop probability at this fill level.</li> </ul> |
| <b>Excess Priority</b> | Priority of the excess bandwidth traffic on a scheduler.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Drop profiles</b>   | Display the assignment of drop profiles. <ul style="list-style-type: none"> <li>• <b>Loss priority</b>—Packet loss priority for drop profile assignment.</li> <li>• <b>Protocol</b>—Transport protocol for drop profile assignment.</li> <li>• <b>Index</b>—Index of the indicated object. Objects that have indexes in this output include schedulers and drop profiles.</li> <li>• <b>Name</b>—Name of the drop profile.</li> <li>• <b>Type</b>—Type of the drop profile: <b>discrete</b> or <b>interpolated</b>.</li> <li>• <b>Fill Level</b>—Percentage fullness of a queue.</li> <li>• <b>Drop probability</b>—Drop probability at this fill level.</li> </ul> |



Table 460: show class-of-service interface Output Fields (*continued*)

| Field Name                    | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Adjustment information</b> | <p>Display the assignment of shaping-rate adjustments on a scheduler node or queue.</p> <ul style="list-style-type: none"> <li>• <b>Adjusting application</b>—Application that is performing the shaping-rate adjustment. <ul style="list-style-type: none"> <li>• The adjusting application can appear as <b>ancp LS-0</b>, which is the Junos OS Access Node Control Profile process (<b>ancpd</b>) that performs shaping-rate adjustments on schedule nodes.</li> <li>• The adjusting application can also appear as <b>pppoe</b>, which adjusts the shaping-rate and overhead-accounting class-of-service attributes on dynamic subscriber interfaces in a broadband access network based on access line parameters in Point-to-Point Protocol over Ethernet (PPPoE) Tags [TR-101]. This feature is supported on MPC/MIC interfaces on MX Series routers. The shaping rate is based on the actual-data-rate-downstream attribute. The overhead accounting value is based on the access-loop-encapsulation attribute and specifies whether the access loop uses Ethernet (frame mode) or ATM (cell mode).</li> </ul> </li> <li>• <b>Adjustment type</b>—Type of adjustment: <b>absolute</b> or <b>delta</b>.</li> <li>• <b>Configured shaping rate</b>—Shaping rate configured for the scheduler node or queue.</li> <li>• <b>Adjustment value</b>—Value of adjusted shaping rate.</li> <li>• <b>Adjustment target</b>—Level of shaping-rate adjustment performed: <b>node</b> or <b>queue</b>.</li> <li>• <b>Adjustment overhead-accounting mode</b>—Configured shaping mode: <b>frame</b> or <b>cell</b>.</li> </ul> |



## Sample Output

### show class-of-service interface (Physical)

```
user@host> show class-of-service interface so-0/2/3
Physical interface: so-0/2/3, Index: 135
Queues supported: 8, Queues in use: 4
Total non-default queues created: 4
Scheduler map: <default>, Index: 2032638653

Logical interface: fe-0/0/1.0, Index: 68, Dedicated Queues: no
Shaping rate: 32000
Object      Name                Type      Index
Scheduler-map <default>          27
Rewrite     exp-default        exp       21
Classifier  exp-default        exp       5
Classifier  ipprec-compatibility ip        8
Forwarding-class-map exp-default      exp       5
```

### show class-of-service interface (Logical)

```
user@host> show class-of-service interface so-0/2/3.0
Logical interface: so-0/2/3.0, Index: 68, Dedicated Queues: no
Shaping rate: 32000
Object      Name                Type      Index
Scheduler-map <default>          27
Rewrite     exp-default        exp       21
Classifier  exp-default        exp       5
Classifier  ipprec-compatibility ip        8
Forwarding-class-map exp-default      exp       5
```

### show class-of-service interface (Gigabit Ethernet)

```
user@host> show class-of-service interface ge-6/2/0
Physical interface: ge-6/2/0, Index: 175
Queues supported: 4, Queues in use: 4
Scheduler map: <default>, Index: 2
Input scheduler map: <default>, Index: 3
Chassis scheduler map: <default-chassis>, Index: 4
```

### show class-of-service interface (PPPoE Interface)

```
user@host> show class-of-service interface pp0.1
Logical interface: pp0.1, Index: 85
Object      Name                Type      Index
Traffic-control-profile tcp-pppoe.o.pp0.1  Output    2726446535
Classifier  ipprec-compatibility ip        13

Adjusting application: PPPoE
Adjustment type: absolute
Adjustment value: 5000000
Adjustment overhead-accounting mode: cell
Adjustment target: node
```

### show class-of-service interface (T4000)

```
user@host> show class-of-service interface xe-4/0/0
Physical interface: xe-4/0/0, Index: 153
Queues supported: 8, Queues in use: 4
```



Routers with Type 5  
FPCs)

Shaping rate: 5000000000 bps  
 Scheduler map: <default>, Index: 2  
 Congestion-notification: Disabled

| Index | Object     | Name                 | Type |
|-------|------------|----------------------|------|
| 13    | Classifier | ipprec-compatibility | ip   |

show class-of-service  
interface detail

```
user@host> show class-of-service interface ge-0/3/0 detail
```

Physical interface: ge-0/3/0, Enabled, Physical link is Up  
 Link-level type: Ethernet, MTU: 1518, Speed: 1000mbps, Loopback: Disabled,  
 Source filtering: Disabled, Flow control: Enabled, Auto-negotiation: Enabled,  
 Remote fault: Online  
 Device flags : Present Running  
 Interface flags: SNMP-Traps Internal: 0x4000

Physical interface: ge-0/3/0, Index: 138  
 Queues supported: 4, Queues in use: 5  
 Shaping rate: 50000 bps  
 Scheduler map: interface-scheduler-map, Index: 58414  
 Input shaping rate: 10000 bps  
 Input scheduler map: scheduler-map, Index: 15103  
 Chassis scheduler map: <default-chassis>, Index: 4  
 Congestion-notification: Disabled

Logical interface ge-0/3/0.0

Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.1 ] Encapsulation: ENET2  
 inet  
 mpls

| Interface  | Admin | Link | Proto | Input Filter  | Output Filter  |
|------------|-------|------|-------|---------------|----------------|
| ge-0/3/0.0 | up    | up   | inet  |               |                |
|            |       |      | mpls  |               |                |
| Interface  | Admin | Link | Proto | Input Policer | Output Policer |
| ge-0/3/0.0 | up    | up   | inet  |               |                |
|            |       |      | mpls  |               |                |

Logical interface: ge-0/3/0.0, Index: 68

| Object     | Name                 | Type           | Index |
|------------|----------------------|----------------|-------|
| Rewrite    | exp-default          | exp (mpls-any) | 33    |
| Classifier | exp-default          | exp            | 10    |
| Classifier | ipprec-compatibility | ip             | 13    |

Logical interface ge-0/3/0.1

Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.2 ] Encapsulation: ENET2  
 inet

| Interface  | Admin | Link | Proto | Input Filter  | Output Filter  |
|------------|-------|------|-------|---------------|----------------|
| ge-0/3/0.1 | up    | up   | inet  |               |                |
| Interface  | Admin | Link | Proto | Input Policer | Output Policer |
| ge-0/3/0.1 | up    | up   | inet  |               |                |

Logical interface: ge-0/3/0.1, Index: 69

| Object     | Name                 | Type | Index |
|------------|----------------------|------|-------|
| Classifier | ipprec-compatibility | ip   | 13    |

## show class-of-service

```
user@host> show class-of-service interface so-1/3/0 comprehensive
```

Physical interface: ge-0/3/0, Enabled, Physical link is Up



## interface comprehensive

```

Interface index: 138, SNMP ifIndex: 601, Generation: 141
Link-level type: Ethernet, MTU: 1518, Speed: 1000mbps, BPDU Error: None,
MAC-REWRITE Error: None, Loopback: Disabled, Source filtering: Disabled, Flow
control: Enabled,
Auto-negotiation: Enabled, Remote fault: Online
Device flags : Present Running
Interface flags: SNMP-Traps Internal: 0x4000
CoS queues : 4 supported, 4 maximum usable queues
Schedulers : 256
Hold-times : Up 0 ms, Down 0 ms
Current address: 00:14:f6:f4:b4:5d, Hardware address: 00:14:f6:f4:b4:5d
Last flapped : 2010-09-07 06:35:22 PDT (15:14:42 ago)
Statistics last cleared: Never
Traffic statistics:
Input bytes : 0 0 bps
Output bytes : 0 0 bps
Input packets: 0 0 pps
Output packets: 0 0 pps
IPv6 total statistics:
Input bytes : 0
Output bytes : 0
Input packets: 0
Output packets: 0
Ingress traffic statistics at Packet Forwarding Engine:
Input bytes : 0 0 bps
Input packets: 0 0 pps
Drop bytes : 0 0 bps
Drop packets: 0 0 pps
Label-switched interface (LSI) traffic statistics:
Input bytes : 0 0 bps
Input packets: 0 0 pps
Input errors:
Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0, L3
incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0, FIFO errors: 0,
Resource errors: 0
Output errors:
Carrier transitions: 5, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,
FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Ingress queues: 4 supported, 5 in use
Queue counters: Queued packets Transmitted packets Dropped packets

0 af3 0 0 0
1 af2 0 0 0
2 ef2 0 0 0
3 ef1 0 0 0

Egress queues: 4 supported, 5 in use
Queue counters: Queued packets Transmitted packets Dropped packets

0 af3 0 0 0
1 af2 0 0 0
2 ef2 0 0 0
3 ef1 0 0 0

Active alarms : None

```



```

Active defects : None
MAC statistics:
    Receive      Transmit
Total octets      0          0
Total packets     0          0
Unicast packets   0          0
Broadcast packets 0          0
Multicast packets 0          0
CRC/Align errors  0          0
FIFO errors       0          0
MAC control frames 0          0
MAC pause frames  0          0
Oversized frames  0
Jabber frames     0
Fragment frames   0
VLAN tagged frames 0
Code violations    0
Filter statistics:
Input packet count      0
Input packet rejects    0
Input DA rejects        0
Input SA rejects        0
Output packet count      0
Output packet pad count  0
Output packet error count 0
CAM destination filters: 0, CAM source filters: 0
Autonegotiation information:
Negotiation status: Complete
Link partner:
Link mode: Full-duplex, Flow control: Symmetric/Asymmetric, Remote fault:
OK
Local resolution:
Flow control: Symmetric, Remote fault: Link OK
Packet Forwarding Engine configuration:
Destination slot: 0
CoS information:
Direction : Output
CoS transmit queue      Bandwidth      Buffer Priority
Limit
    %      bps      %      usec
2 ef2      39      19500    0      120      high
none
Direction : Input
CoS transmit queue      Bandwidth      Buffer Priority
Limit
    %      bps      %      usec
0 af3      30      3000    45      0      low
none

Physical interface: ge-0/3/0, Enabled, Physical link is Up
Interface index: 138, SNMP ifIndex: 601
Forwarding classes: 16 supported, 5 in use
Ingress queues: 4 supported, 5 in use
Queue: 0, Forwarding classes: af3
Queued:
Packets      :      0      0 pps
Bytes        :      0      0 bps
Transmitted:
Packets      :      0      0 pps
Bytes        :      0      0 bps
Tail-dropped packets : Not Available
RED-dropped packets  :      0      0 pps

```



```

    RED-dropped bytes      :                0                0 bps
Queue: 1, Forwarding classes: af2
  Queued:
    Packets                :                0                0 pps
    Bytes                  :                0                0 bps
  Transmitted:
    Packets                :                0                0 pps
    Bytes                  :                0                0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets   :                0                0 pps
    RED-dropped bytes     :                0                0 bps
Queue: 2, Forwarding classes: ef2
  Queued:
    Packets                :                0                0 pps
    Bytes                  :                0                0 bps
  Transmitted:
    Packets                :                0                0 pps
    Bytes                  :                0                0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets   :                0                0 pps
    RED-dropped bytes     :                0                0 bps
Queue: 3, Forwarding classes: ef1
  Queued:
    Packets                :                0                0 pps
    Bytes                  :                0                0 bps
  Transmitted:
    Packets                :                0                0 pps
    Bytes                  :                0                0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets   :                0                0 pps
    RED-dropped bytes     :                0                0 bps
Forwarding classes: 16 supported, 5 in use
Egress queues: 4 supported, 5 in use
Queue: 0, Forwarding classes: af3
  Queued:
    Packets                :                0                0 pps
    Bytes                  :                0                0 bps
  Transmitted:
    Packets                :                0                0 pps
    Bytes                  :                0                0 bps
    Tail-dropped packets : Not Available
    RL-dropped packets    :                0                0 pps
    RL-dropped bytes      :                0                0 bps
    RED-dropped packets   :                0                0 pps
    RED-dropped bytes     :                0                0 bps
Queue: 1, Forwarding classes: af2
  Queued:
    Packets                :                0                0 pps
    Bytes                  :                0                0 bps
  Transmitted:
    Packets                :                0                0 pps
    Bytes                  :                0                0 bps
    Tail-dropped packets : Not Available
    RL-dropped packets    :                0                0 pps
    RL-dropped bytes      :                0                0 bps
    RED-dropped packets   :                0                0 pps
    RED-dropped bytes     :                0                0 bps
Queue: 2, Forwarding classes: ef2
  Queued:
    Packets                :                0                0 pps
    Bytes                  :                0                0 bps

```



```

Transmitted:
Packets          :                0                0 pps
Bytes            :                0                0 bps
Tail-dropped packets : Not Available
RL-dropped packets :                0                0 pps
RL-dropped bytes   :                0                0 bps
RED-dropped packets :                0                0 pps
RED-dropped bytes   :                0                0 bps
Queue: 3, Forwarding classes: ef1
Queued:
Packets          :                0                0 pps
Bytes            :                0                0 bps
Transmitted:
Packets          :                0                0 pps
Bytes            :                0                0 bps
Tail-dropped packets : Not Available
RL-dropped packets :                0                0 pps
RL-dropped bytes   :                0                0 bps
RED-dropped packets :                0                0 pps
RED-dropped bytes   :                0                0 bps

Packet Forwarding Engine Chassis Queues:
Queues: 4 supported, 5 in use
Queue: 0, Forwarding classes: af3
Queued:
Packets          :                0                0 pps
Bytes            :                0                0 bps
Transmitted:
Packets          :                0                0 pps
Bytes            :                0                0 bps
Tail-dropped packets :                0                0 pps
RED-dropped packets : Not Available
RED-dropped bytes   : Not Available
Queue: 1, Forwarding classes: af2
Queued:
Packets          :                0                0 pps
Bytes            :                0                0 bps
Transmitted:
Packets          :                0                0 pps
Bytes            :                0                0 bps
Tail-dropped packets :                0                0 pps
RED-dropped packets : Not Available
RED-dropped bytes   : Not Available
Queue: 2, Forwarding classes: ef2
Queued:
Packets          :                0                0 pps
Bytes            :                0                0 bps
Transmitted:
Packets          :                0                0 pps
Bytes            :                0                0 bps
Tail-dropped packets :                0                0 pps
RED-dropped packets : Not Available
RED-dropped bytes   : Not Available
Queue: 3, Forwarding classes: ef1
Queued:
Packets          :            108546                0 pps
Bytes            :        12754752            376 bps
Transmitted:
Packets          :            108546                0 pps
Bytes            :        12754752            376 bps
Tail-dropped packets :                0                0 pps

```



RED-dropped packets : Not Available  
 RED-dropped bytes : Not Available

Physical interface: ge-0/3/0, Index: 138  
 Queues supported: 4, Queues in use: 5  
 Shaping rate: 50000 bps

Scheduler map: interface-scheduler-map, Index: 58414

Scheduler: ef2, Forwarding class: ef2, Index: 39155  
 Transmit rate: 39 percent, Rate Limit: none, Buffer size: 120 us, Buffer  
 Limit: none, Priority: high  
 Excess Priority: unspecified  
 Drop profiles:  

| Loss priority | Protocol | Index | Name                    |
|---------------|----------|-------|-------------------------|
| Low           | any      | 1     | < default-drop-profile> |
| Medium low    | any      | 1     | < default-drop-profile> |
| Medium high   | any      | 1     | < default-drop-profile> |
| High          | any      | 1     | < default-drop-profile> |

 Drop profile: < default-drop-profile>, Type: discrete, Index: 1  

| Fill level | Drop probability |
|------------|------------------|
| 100        | 100              |

 Drop profile: < default-drop-profile>, Type: discrete, Index: 1  

| Fill level | Drop probability |
|------------|------------------|
| 100        | 100              |

 Drop profile: < default-drop-profile>, Type: discrete, Index: 1  

| Fill level | Drop probability |
|------------|------------------|
| 100        | 100              |

 Drop profile: < default-drop-profile>, Type: discrete, Index: 1  

| Fill level | Drop probability |
|------------|------------------|
| 100        | 100              |

 Input shaping rate: 10000 bps  
 Input scheduler map: scheduler-map

Scheduler map: scheduler-map, Index: 15103

Scheduler: af3, Forwarding class: af3, Index: 35058  
 Transmit rate: 30 percent, Rate Limit: none, Buffer size: 45 percent, Buffer  
 Limit: none, Priority: low  
 Excess Priority: unspecified  
 Drop profiles:  

| Loss priority | Protocol | Index | Name                    |
|---------------|----------|-------|-------------------------|
| Low           | any      | 40582 | green                   |
| Medium low    | any      | 1     | < default-drop-profile> |
| Medium high   | any      | 1     | < default-drop-profile> |
| High          | any      | 18928 | yellow                  |

 Drop profile: green, Type: discrete, Index: 40582  

| Fill level | Drop probability |
|------------|------------------|
| 50         | 0                |
| 100        | 100              |

 Drop profile: < default-drop-profile>, Type: discrete, Index: 1  

| Fill level | Drop probability |
|------------|------------------|
| 100        | 100              |

 Drop profile: < default-drop-profile>, Type: discrete, Index: 1  

| Fill level | Drop probability |
|------------|------------------|
| 100        | 100              |

 Drop profile: yellow, Type: discrete, Index: 18928  

| Fill level | Drop probability |
|------------|------------------|
| 50         | 0                |
| 100        | 100              |

 Chassis scheduler map: < default-drop-profile>



Scheduler map: < default-drop-profile>, Index: 4

Scheduler: < default-drop-profile>, Forwarding class: af3, Index: 25

Transmit rate: 25 percent, Rate Limit: none, Buffer size: 25 percent, Buffer Limit: none, Priority: low

Excess Priority: low

Drop profiles:

| Loss priority | Protocol | Index | Name                    |
|---------------|----------|-------|-------------------------|
| Low           | any      | 1     | < default-drop-profile> |
| Medium low    | any      | 1     | < default-drop-profile> |
| Medium high   | any      | 1     | < default-drop-profile> |
| High          | any      | 1     | < default-drop-profile> |

Drop profile: < default-drop-profile>, Type: discrete, Index: 1

|            |                  |
|------------|------------------|
| Fill level | Drop probability |
| 100        | 100              |

Drop profile: < default-drop-profile>, Type: discrete, Index: 1

|            |                  |
|------------|------------------|
| Fill level | Drop probability |
| 100        | 100              |

Drop profile: < default-drop-profile>, Type: discrete, Index: 1

|            |                  |
|------------|------------------|
| Fill level | Drop probability |
| 100        | 100              |

Drop profile: < default-drop-profile>, Type: discrete, Index: 1

|            |                  |
|------------|------------------|
| Fill level | Drop probability |
| 100        | 100              |

Scheduler: < default-drop-profile>, Forwarding class: af2, Index: 25

Transmit rate: 25 percent, Rate Limit: none, Buffer size: 25 percent, Buffer Limit: none, Priority: low

Excess Priority: low

Drop profiles:

| Loss priority | Protocol | Index | Name                    |
|---------------|----------|-------|-------------------------|
| Low           | any      | 1     | < default-drop-profile> |
| Medium low    | any      | 1     | < default-drop-profile> |
| Medium high   | any      | 1     | < default-drop-profile> |
| High          | any      | 1     | < default-drop-profile> |

Drop profile: < default-drop-profile>, Type: discrete, Index: 1

|            |                  |
|------------|------------------|
| Fill level | Drop probability |
| 100        | 100              |

Drop profile: < default-drop-profile>, Type: discrete, Index: 1

|            |                  |
|------------|------------------|
| Fill level | Drop probability |
| 100        | 100              |

Drop profile: < default-drop-profile>, Type: discrete, Index: 1

|            |                  |
|------------|------------------|
| Fill level | Drop probability |
| 100        | 100              |

Drop profile: < default-drop-profile>, Type: discrete, Index: 1

|            |                  |
|------------|------------------|
| Fill level | Drop probability |
| 100        | 100              |

Scheduler: < default-drop-profile>, Forwarding class: ef2, Index: 25

Transmit rate: 25 percent, Rate Limit: none, Buffer size: 25 percent, Buffer Limit: none, Priority: low

Excess Priority: low

Drop profiles:

| Loss priority | Protocol | Index | Name                    |
|---------------|----------|-------|-------------------------|
| Low           | any      | 1     | < default-drop-profile> |
| Medium low    | any      | 1     | < default-drop-profile> |
| Medium high   | any      | 1     | < default-drop-profile> |
| High          | any      | 1     | < default-drop-profile> |

Drop profile: < default-drop-profile>, Type: discrete, Index: 1

|            |                  |
|------------|------------------|
| Fill level | Drop probability |
| 100        | 100              |



```

Drop profile: < default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100         100
Drop profile: < default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100         100
Drop profile: < default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100         100

Scheduler: < default-drop-profile>, Forwarding class: ef1, Index: 25
  Transmit rate: 25 percent, Rate Limit: none, Buffer size: 25 percent, Buffer
  Limit: none, Priority: low
  Excess Priority: low
  Drop profiles:
    Loss priority  Protocol    Index    Name
    Low           any         1        < default-drop-profile>
    Medium low    any         1        < default-drop-profile>
    Medium high   any         1        < default-drop-profile>
    High          any         1        < default-drop-profile>
Drop profile: , Type: discrete, Index: 1
  Fill level    Drop probability
    100         100
Drop profile: < default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100         100
Drop profile: < default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100         100
Drop profile: < default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100         100
  Congestion-notification: Disabled
Forwarding class          ID      Queue  Restricted queue  Fabric
priority Policing priority
af3          normal          0       0             0         low
af2          normal          1       1             1         low
ef2          normal          2       2             2         high
ef1          normal          3       3             3         high
af1          normal          4       4             0         low

Logical interface ge-0/3/0.0 (Index 68) (SNMP ifIndex 152) (Generation 159)
Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.1 ] Encapsulation: ENET2
Traffic statistics:
  Input bytes :          0
  Output bytes :          0
  Input packets:          0
  Output packets:          0
Local statistics:
  Input bytes :          0
  Output bytes :          0
  Input packets:          0
  Output packets:          0
Transit statistics:
  Input bytes :          0             0 bps
  Output bytes :          0             0 bps

```



```

Input packets:          0          0 pps
Output packets:         0          0 pps
Protocol inet, MTU: 1500, Generation: 172, Route table: 0
  Flags: Sendbcst-pkt-to-re
  Input Filters: filter-in-ge-0/3/0.0-i,
  Policer: Input: p1-ge-0/3/0.0-inet-i
Protocol mpls, MTU: 1488, Maximum labels: 3, Generation: 173, Route table: 0

  Flags: Is-Primary
  Output Filters: exp-filter,,,,,

```

```

Logical interface ge-0/3/0.0 (Index 68) (SNMP ifIndex 152)
  Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.1 ] Encapsulation: ENET2
  Input packets : 0
  Output packets: 0

```

| Interface  | Admin | Link | Proto | Input Filter           | Output Filter |
|------------|-------|------|-------|------------------------|---------------|
| ge-0/3/0.0 | up    | up   | inet  | filter-in-ge-0/3/0.0-i |               |
|            |       |      | mpls  |                        | exp-filter    |

| Interface  | Admin | Link | Proto | Input Policer        | Output Policer |
|------------|-------|------|-------|----------------------|----------------|
| ge-0/3/0.0 | up    | up   | inet  | p1-ge-0/3/0.0-inet-i |                |
|            |       |      | mpls  |                      |                |

Filter: filter-in-ge-0/3/0.0-i

Counters:

| Name                         | Bytes | Packets |
|------------------------------|-------|---------|
| count-filter-in-ge-0/3/0.0-i | 0     | 0       |

Filter: exp-filter

Counters:

| Name                  | Bytes | Packets |
|-----------------------|-------|---------|
| count-exp-seven-match | 0     | 0       |
| count-exp-zero-match  | 0     | 0       |

Policers:

| Name                 | Packets |
|----------------------|---------|
| p1-ge-0/3/0.0-inet-i | 0       |

Logical interface: ge-0/3/0.0, Index: 68

| Object  | Name        | Type           | Index |
|---------|-------------|----------------|-------|
| Rewrite | exp-default | exp (mpls-any) | 33    |

Rewrite rule: exp-default, Code point type: exp, Index: 33

| Forwarding class | Loss priority | Code point |
|------------------|---------------|------------|
| af3              | low           | 000        |
| af3              | high          | 001        |
| af2              | low           | 010        |
| af2              | high          | 011        |
| ef2              | low           | 100        |
| ef2              | high          | 101        |
| ef1              | low           | 110        |
| ef1              | high          | 111        |

| Object     | Name        | Type | Index |
|------------|-------------|------|-------|
| Classifier | exp-default | exp  | 10    |

Classifier: exp-default, Code point type: exp, Index: 10

| Code point | Forwarding class | Loss priority |
|------------|------------------|---------------|
| 000        | af3              | low           |



|            |                      |      |       |
|------------|----------------------|------|-------|
| 001        | af3                  | high |       |
| 010        | af2                  | low  |       |
| 011        | af2                  | high |       |
| 100        | ef2                  | low  |       |
| 101        | ef2                  | high |       |
| 110        | ef1                  | low  |       |
| 111        | ef1                  | high |       |
| Object     | Name                 | Type | Index |
| Classifier | ipprec-compatibility | ip   | 13    |

Classifier: ipprec-compatibility, Code point type: inet-precedence, Index: 13

| Code point       | Forwarding class | Loss priority |                  |        |
|------------------|------------------|---------------|------------------|--------|
| 000              | af3              | low           |                  |        |
| 001              | af3              | high          |                  |        |
| 010              | af3              | low           |                  |        |
| 011              | af3              | high          |                  |        |
| 100              | af3              | low           |                  |        |
| 101              | af3              | high          |                  |        |
| 110              | ef1              | low           |                  |        |
| 111              | ef1              | high          |                  |        |
| Forwarding class | ID               | Queue         | Restricted queue | Fabric |
| priority         |                  |               |                  |        |
| af3              | 0                | 0             | 0                | low    |
| normal           |                  |               |                  |        |
| af2              | 1                | 1             | 1                | low    |
| normal           |                  |               |                  |        |
| ef2              | 2                | 2             | 2                | high   |
| normal           |                  |               |                  |        |
| ef1              | 3                | 3             | 3                | high   |
| normal           |                  |               |                  |        |
| af1              | 4                | 4             | 0                | low    |
| normal           |                  |               |                  |        |

Logical interface ge-0/3/0.1 (Index 69) (SNMP ifIndex 154) (Generation 160)

Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.2 ] Encapsulation: ENET2

Traffic statistics:

Input bytes : 0  
Output bytes : 0  
Input packets: 0  
Output packets: 0

Local statistics:

Input bytes : 0  
Output bytes : 0  
Input packets: 0  
Output packets: 0

Transit statistics:

Input bytes : 0 0 bps  
Output bytes : 0 0 bps  
Input packets: 0 0 pps  
Output packets: 0 0 pps

Protocol inet, MTU: 1500, Generation: 174, Route table: 0

Flags: Sendbcst-pkt-to-re

Logical interface ge-0/3/0.1 (Index 69) (SNMP ifIndex 154)

Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.2 ] Encapsulation: ENET2

Input packets : 0

Output packets: 0

|           |                               |               |
|-----------|-------------------------------|---------------|
| Interface | Admin Link Proto Input Filter | Output Filter |
|-----------|-------------------------------|---------------|



```

ge-0/3/0.1    up    up    mpls
Interface     Admin Link Proto Input Policer      Output Policer
ge-0/3/0.1    up    up                mpls

Logical interface: ge-0/3/0.1, Index: 69
Object          Name                      Type                      Index
Classifier       ipprec-compatibility    ip                        13

Classifier: ipprec-compatibility, Code point type: inet-precedence, Index: 13
Code point      Forwarding class          Loss priority
000             af3                       low
001             af3                       high
010             af3                       low
011             af3                       high
100             af3                       low
101             af3                       high
110             ef1                       low
111             ef1                       high
Forwarding class ID      Queue  Restricted queue  Fabric
priority Policing priority
af3             normal          0      0      0      low
af2             normal          1      1      1      low
ef2             normal          2      2      2      high
ef1             normal          3      3      3      high
af1             normal          4      4      0      low

```

### show class-of-service interface (ACX Series Routers)

```

user@host-g11# show class-of-service interface
Physical interface: at-0/0/0, Index: 130
Queues supported: 4, Queues in use: 4
Scheduler map: <default>, Index: 2
Congestion-notification: Disabled

Logical interface: at-0/0/0.0, Index: 69

Logical interface: at-0/0/0.32767, Index: 70

Physical interface: at-0/0/1, Index: 133
Queues supported: 4, Queues in use: 4
Scheduler map: <default>, Index: 2
Congestion-notification: Disabled

Logical interface: at-0/0/1.0, Index: 71

Logical interface: at-0/0/1.32767, Index: 72

Physical interface: ge-0/1/0, Index: 146
Queues supported: 8, Queues in use: 5
Scheduler map: <default>, Index: 2
Congestion-notification: Disabled
Object          Name                      Type                      Index
Rewrite         dscp-default             dscp                      31
Classifier       d1                       dscp                      11331

```



|                                              |                      |                   |       |
|----------------------------------------------|----------------------|-------------------|-------|
| Classifier                                   | ci                   | ieee8021p         | 583   |
| Logical interface: ge-0/1/0.0, Index: 73     |                      |                   |       |
| Object                                       | Name                 | Type              | Index |
| Rewrite                                      | custom-exp           | exp (mpls-any)    | 46413 |
| Logical interface: ge-0/1/0.1, Index: 74     |                      |                   |       |
| Logical interface: ge-0/1/0.32767, Index: 75 |                      |                   |       |
| Physical interface: ge-0/1/1, Index: 147     |                      |                   |       |
| Queues supported: 8, Queues in use: 5        |                      |                   |       |
| Scheduler map: <default>, Index: 2           |                      |                   |       |
| Congestion-notification: Disabled            |                      |                   |       |
| Object                                       | Name                 | Type              | Index |
| Classifier                                   | ipprec-compatibility | ip                | 13    |
| Logical interface: ge-0/1/1.0, Index: 76     |                      |                   |       |
| Physical interface: ge-0/1/2, Index: 148     |                      |                   |       |
| Queues supported: 8, Queues in use: 5        |                      |                   |       |
| Scheduler map: <default>, Index: 2           |                      |                   |       |
| Congestion-notification: Disabled            |                      |                   |       |
| Object                                       | Name                 | Type              | Index |
| Rewrite                                      | ri                   | ieee8021p (outer) | 35392 |
| Classifier                                   | ci                   | ieee8021p         | 583   |
| Physical interface: ge-0/1/3, Index: 149     |                      |                   |       |
| Queues supported: 8, Queues in use: 5        |                      |                   |       |
| Scheduler map: <default>, Index: 2           |                      |                   |       |
| Congestion-notification: Disabled            |                      |                   |       |
| Object                                       | Name                 | Type              | Index |
| Classifier                                   | ipprec-compatibility | ip                | 13    |
| Logical interface: ge-0/1/3.0, Index: 77     |                      |                   |       |
| Object                                       | Name                 | Type              | Index |
| Rewrite                                      | custom-exp2          | exp (mpls-any)    | 53581 |
| Physical interface: ge-0/1/4, Index: 150     |                      |                   |       |
| Queues supported: 8, Queues in use: 5        |                      |                   |       |
| Scheduler map: <default>, Index: 2           |                      |                   |       |
| Congestion-notification: Disabled            |                      |                   |       |
| Object                                       | Name                 | Type              | Index |
| Classifier                                   | ipprec-compatibility | ip                | 13    |
| Physical interface: ge-0/1/5, Index: 151     |                      |                   |       |
| Queues supported: 8, Queues in use: 5        |                      |                   |       |
| Scheduler map: <default>, Index: 2           |                      |                   |       |
| Congestion-notification: Disabled            |                      |                   |       |
| Object                                       | Name                 | Type              | Index |
| Classifier                                   | ipprec-compatibility | ip                | 13    |
| Physical interface: ge-0/1/6, Index: 152     |                      |                   |       |
| Queues supported: 8, Queues in use: 5        |                      |                   |       |
| Scheduler map: <default>, Index: 2           |                      |                   |       |
| Congestion-notification: Disabled            |                      |                   |       |
| Object                                       | Name                 | Type              | Index |
| Classifier                                   | ipprec-compatibility | ip                | 13    |
| Physical interface: ge-0/1/7, Index: 153     |                      |                   |       |
| Queues supported: 8, Queues in use: 5        |                      |                   |       |



```
Scheduler map: <default>, Index: 2
Congestion-notification: Disabled
Object      Name      Type      Index
Classifier  d1          dscp      11331

Physical interface: ge-0/2/0, Index: 154
Queues supported: 8, Queues in use: 5
Scheduler map: <default>, Index: 2
Congestion-notification: Disabled
Object      Name      Type      Index
Classifier  ipprec-compatibility  ip        13

Physical interface: ge-0/2/1, Index: 155
Queues supported: 8, Queues in use: 5
Scheduler map: <default>, Index: 2
Congestion-notification: Disabled
Object      Name      Type      Index
Classifier  ipprec-compatibility  ip        13

Logical interface: ge-0/2/1.0, Index: 78

Logical interface: ge-0/2/1.32767, Index: 79

Physical interface: xe-0/3/0, Index: 156
Queues supported: 8, Queues in use: 5
Scheduler map: <default>, Index: 2
Congestion-notification: Disabled
Object      Name      Type      Index
Classifier  ipprec-compatibility  ip        13

Logical interface: xe-0/3/0.0, Index: 80

Physical interface: xe-0/3/1, Index: 157
Queues supported: 8, Queues in use: 5
Scheduler map: <default>, Index: 2
Congestion-notification: Disabled
Object      Name      Type      Index
Classifier  ipprec-compatibility  ip        13

Logical interface: xe-0/3/1.0, Index: 81

[edit]
user@host-g11#
```



## show class-of-service multi-destination

|                                 |                                                                                                                                                                                                            |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show class-of-service multi-destination                                                                                                                                                                    |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                         |
| <b>Description</b>              | For each class-of-service (CoS) multideestination classifier, display the classifier type.                                                                                                                 |
| <b>Options</b>                  | <b>none</b> —Display all multideestination classifiers.                                                                                                                                                    |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                       |
| <b>Output Fields</b>            | <a href="#">Table 461 on page 5329</a> describes the output fields for the <b>show class-of-service multi-destination</b> command. Output fields are listed in the approximate order in which they appear. |

**Table 461: show class-of-service multi-destination Output Fields**

| Field Name       | Field Description                                          |
|------------------|------------------------------------------------------------|
| Family ethernet  | Family to which the classifier belongs.                    |
| Classifier Name  | Name of the classifier.                                    |
| Classifier Type  | Type of the classifier: <b>dscp</b> or <b>ieee-802.1</b> . |
| Classifier Index | Internal index of the classifier.                          |

## Sample Output

### show class-of-service multi-destination

```
user@switch> show class-of-service multi-destination
```

```
Family ethernet:
Classifier Name      Classifier Type      Classifier Index
ba-mcast-classifier  ieee-802.1         62376
```



## show class-of-service rewrite-rule

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>show class-of-service rewrite-rule &lt;name <i>name</i>&gt; &lt;type <i>type</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Display the mapping of forwarding classes and loss priority to code point values.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b>none</b>—Display all rewrite rules.</p> <p><b>name <i>name</i></b>—(Optional) Display the specified rewrite rule.</p> <p><b>type <i>type</i></b>—(Optional) Display the rewrite rule of the specified type. The rewrite rule type can be one of the following:</p> <ul style="list-style-type: none"> <li><b>dscp</b>—For IPv4 traffic.</li> <li><b>dscp-ipv6</b>—For IPv6 traffic.</li> <li><b>exp</b>—For MPLS traffic.</li> <li><b>frame-relay-de</b>—(J Series routers only) For Frame Relay traffic.</li> <li><b>ieee-802.1</b>—For Layer 2 traffic.</li> <li><b>inet-precedence</b>—For IPv4 traffic.</li> </ul> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>List of Sample Output</b>    | <p><a href="#">show class-of-service rewrite-rule type dscp on page 5331</a></p> <p><a href="#">show class-of-service rewrite-rule type dscp (QFX Series) on page 5331</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Output Fields</b>            | <p><a href="#">Table 462 on page 5330</a> describes the output fields for the <b>show class-of-service rewrite-rule</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                                                                                                                                                                                                                                                 |

**Table 462: show class-of-service rewrite-rule Output Fields**

| Field Name              | Field Description                                                                                                                          |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Rewrite rule</b>     | Name of the rewrite rule.                                                                                                                  |
| <b>Code point type</b>  | Type of rewrite rule: <b>dscp</b> , <b>dscp-ipv6</b> , <b>exp</b> , <b>frame-relay-de</b> , or <b>inet-precedence</b> .                    |
| <b>Forwarding class</b> | Classification of a packet affecting the forwarding, scheduling, and marking policies applied as the packet transits the router or switch. |
| <b>Index</b>            | Internal index for this particular rewrite rule.                                                                                           |
| <b>Loss priority</b>    | Loss priority for rewriting.                                                                                                               |



Table 462: show class-of-service rewrite-rule Output Fields (*continued*)

| Field Name | Field Description            |
|------------|------------------------------|
| Code point | Code point value to rewrite. |

## Sample Output

**show class-of-service  
rewrite-rule type dscp**

```

user@host> show class-of-service rewrite-rule type dscp
Rewrite rule: dscp-default, Code point type: dscp
  Forwarding class      Loss priority      Code point
  gold                  high              000000
  silver               low              110000
  silver               high              111000
  bronze               low              001010
  bronze               high              001100
  lead                 high              101110

Rewrite rule: abc-dscp-rewrite, Code point type: dscp, Index: 3245
  Forwarding class      Loss priority      Code point
  gold                  low               000111
  gold                  high              001010
  silver               low              110000
  silver               high              111000
  bronze               high              001100
  lead                 low              101110
  lead                 high              110111

```

## Sample Output

**show class-of-service  
rewrite-rule type dscp  
(QFX Series)**

```

user@host> show class-of-service rewrite-rule type dscp
Rewrite rule: dscp-default, Code point type: dscp, Index: 31
  Forwarding class      Loss priority      Code point
  best-effort           low               000000
  best-effort           high              000000
  fcoe                  low              101110
  fcoe                  high              101110
  no-loss               low              001010
  no-loss               high              001100
  network-control       low              110000
  network-control       high              111000

```



## show class-of-service scheduler-map

|                                 |                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show class-of-service scheduler-map</code><br><code>&lt;name&gt;</code>                                                                                                                          |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                     |
| <b>Description</b>              | Display the mapping of schedulers to forwarding classes and a summary of scheduler parameters for each entry.                                                                                          |
| <b>Options</b>                  | <b>none</b> —Display all scheduler maps.<br><br><b>name</b> —(Optional) Display a summary of scheduler parameters for each forwarding class to which the named scheduler is assigned.                  |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                   |
| <b>List of Sample Output</b>    | <a href="#">show class-of-service scheduler-map on page 5333</a>                                                                                                                                       |
| <b>Output Fields</b>            | <a href="#">Table 463 on page 5332</a> describes the output fields for the <b>show class-of-service scheduler-map</b> command. Output fields are listed in the approximate order in which they appear. |

Table 463: show class-of-service scheduler-map Output Fields

| Field Name                  | Field Description                                                                                                                                                                                                                                                                                          |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Scheduler map</b>        | Name of the scheduler map.                                                                                                                                                                                                                                                                                 |
| <b>Index</b>                | Index of the indicated object. Objects having indexes in this output include scheduler maps, schedulers, and drop profiles.                                                                                                                                                                                |
| <b>Scheduler</b>            | Name of the scheduler.                                                                                                                                                                                                                                                                                     |
| <b>Forwarding class</b>     | Classification of a packet affecting the forwarding, scheduling, and marking policies applied as the packet transits the router.                                                                                                                                                                           |
| <b>Transmit rate</b>        | Configured transmit rate of the scheduler (in bps). The rate is a percentage of the total interface bandwidth, or the keyword <b>remainder</b> , which indicates that the scheduler receives the remaining bandwidth of the interface.                                                                     |
| <b>Rate Limit</b>           | Rate limiting configuration of the queue. Possible values are <b>none</b> , meaning no rate limiting, and <b>exact</b> , meaning the queue only transmits at the configured rate.                                                                                                                          |
| <b>Maximum buffer delay</b> | Amount of transmit delay (in milliseconds) or the buffer size of the queue. The buffer size is shown as a percentage of the total interface buffer allocation, or by the keyword <b>remainder</b> to indicate that the buffer is sized according to what remains after other scheduler buffer allocations. |
| <b>Priority</b>             | Scheduling priority: <b>low</b> or <b>high</b> .                                                                                                                                                                                                                                                           |



Table 463: show class-of-service scheduler-map Output Fields (*continued*)

| Field Name      | Field Description                                                                                                  |
|-----------------|--------------------------------------------------------------------------------------------------------------------|
| Excess priority | Priority of excess bandwidth: <b>low</b> , <b>medium-low</b> , <b>medium-high</b> , <b>high</b> , or <b>none</b> . |
| Adjust minimum  | Minimum shaping rate for an adjusted queue, in bps.                                                                |
| Adjust percent  | Bandwidth adjustment applied to a queue, in percent.                                                               |
| Drop profiles   | Table displaying the assignment of drop profiles by name and index to a given loss priority and protocol pair.     |
| Loss priority   | Packet loss priority for drop profile assignment.                                                                  |
| Protocol        | Transport protocol for drop profile assignment.                                                                    |
| Name            | Name of the drop profile.                                                                                          |

## Sample Output

**show class-of-service  
scheduler-map**

```
user@host> show class-of-service scheduler-map
Scheduler map: dd-scheduler-map, Index: 84
```

```
Scheduler: aa-scheduler, Index: 8721, Forwarding class: aa-forwarding-class
Transmit rate: 30 percent, Rate Limit: none, Maximum buffer delay: 39 ms,
Priority: high
Drop profiles:
  Loss priority  Protocol  Index  Name
  Low           non-TCP   8724   aa-drop-profile
  Low           TCP       9874   bb-drop-profile
  High          non-TCP   8833   cc-drop-profile
  High          TCP       8484   dd-drop-profile
```

```
Scheduler: bb-scheduler, Forwarding class: aa-forwarding-class
Transmit rate: 40 percent, Rate limit: none, Maximum buffer delay: 68 ms,
Priority: high
Drop profiles:
  Loss priority  Protocol  Index  Name
  Low           non-TCP   8724   aa-drop-profile
  Low           TCP       9874   bb-drop-profile
  High          non-TCP   8833   cc-drop-profile
  High          TCP       8484   dd-drop-profile
```



## show class-of-service shared-buffer

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show class-of-service shared-buffer<br><egress   ingress>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | Command introduced in Junos OS Release 12.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Display the shared buffer allocation and partitioning configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <p><b>none</b>—Display ingress and egress shared buffer settings.</p> <p><b>egress</b>—(Optional) Display the egress shared buffer settings.</p> <p><b>ingress</b>—(Optional) Display the ingress shared buffer settings.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Best-Effort Unicast Traffic on page 5103</a></li> <li>• <a href="#">Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Multicast Traffic on page 5109</a></li> <li>• <a href="#">Example: Recommended Configuration of the Shared Buffer Pool for Networks with Mostly Lossless Traffic on page 5114</a></li> <li>• <a href="#">Configuring Global Ingress and Egress Shared Buffers on page 5153</a></li> <li>• <a href="#">Understanding CoS Buffer Configuration on page 4914</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show class-of-service shared-buffer on page 5335</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Output Fields</b>            | Table 464 on page 5334 describes the output fields for the <b>show class-of-service shared-buffer</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

**Table 464: show class-of-service shared-buffer Output Fields**

| Field Name       | Field Description                                                                                                   |
|------------------|---------------------------------------------------------------------------------------------------------------------|
| Ingress          | Ingress shared buffer configuration.                                                                                |
| Total Buffer     | Total buffer space available to the ports in KB. This is the combined dedicated buffer pool and shared buffer pool. |
| Dedicated Buffer | Buffer space allocated to the dedicated buffer pool in KB.                                                          |
| Shared Buffer    | Buffer space allocated to the shared buffer pool in KB.                                                             |
| Lossless         | Buffer space allocated to the lossless traffic buffer pool in KB.                                                   |



Table 464: show class-of-service shared-buffer Output Fields (*continued*)

| Field Name                           | Field Description                                                                                                                                                                                           |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Lossless Headroom</b>             | Buffer space allocated to the lossless headroom traffic buffer pool to support priority-based flow control (PFC) and Ethernet PAUSE in KB. (Ingress ports only.)                                            |
| <b>Lossy</b>                         | Buffer space allocated to the lossy (best-effort) traffic buffer pool in KB.                                                                                                                                |
| <b>Lossless Headroom Utilization</b> | Utilization of the ingress lossless headroom buffer pool. (These fields can help you to determine how much headroom buffer space you need to reserve to support PFC and Ethernet PAUSE for lossless flows.) |
| <b>Node Device</b>                   | Index number that identifies the switch. On a QFX3500 switch, this field always has a value of zero (0).                                                                                                    |
| <b>Total</b>                         | Size of the lossless headroom ingress buffer pool in KB.                                                                                                                                                    |
| <b>Used</b>                          | Amount in KB of lossless headroom ingress buffer used.                                                                                                                                                      |
| <b>Free</b>                          | Amount in KB of lossless headroom ingress buffer free (unused).                                                                                                                                             |
| <b>Egress</b>                        | Egress shared buffer configuration.                                                                                                                                                                         |
| <b>Multicast</b>                     | Buffer space allocated to the multicast traffic buffer pool in KB. (Egress ports only.)                                                                                                                     |

## Sample Output

**show class-of-service  
shared-buffer**

```
user@switch> show class-of-service shared-buffer
```

Ingress:

```
Total Buffer      : 9360.00 KB
Dedicated Buffer  : 2158.00 KB
Shared Buffer     : 7202.00 KB
  Lossless       : 648.18 KB
  Lossless Headroom : 3240.90 KB
  Lossy          : 3312.92 KB
```

Lossless Headroom Utilization:

| Node Device | Total      | Used    | Free       |
|-------------|------------|---------|------------|
| 0           | 3240.90 KB | 0.00 KB | 3240.90 KB |

Egress:

```
Total Buffer      : 9360.00 KB
Dedicated Buffer  : 2704.00 KB
Shared Buffer     : 6656.00 KB
  Lossless       : 3328.00 KB
  Multicast      : 1264.64 KB
  Lossy          : 2063.36 KB
```



## show class-of-service traffic-control-profile

|                                 |                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show class-of-service traffic-control-profile</code><br><code>&lt;profile-name&gt;</code>                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.<br>Command introduced in Junos OS Release 12.2 for ACX Series Routers.                                                                                                                                                               |
| <b>Description</b>              | For Gigabit Ethernet IQ PICs, Channelized IQ PICs, EQ DPCs, and Trio MPC/MIC interfaces only, display traffic shaping and scheduling profiles.<br><br>(ACX Series routers) For ATM IMA pseudowire interfaces, display traffic shaping and scheduling profiles.                                                                                          |
| <b>Options</b>                  | <b>none</b> —Display all profiles.<br><br><b>profile-name</b> —(Optional) Display information about a single profile.                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                    |
| <b>List of Sample Output</b>    | <a href="#">show class-of-service traffic-control-profile on page 5338</a><br><a href="#">show class-of-service traffic-control-profile (MX Series routers with Clear Channel Multi-Rate CE MIC) on page 5338</a><br><a href="#">show class-of-service traffic-control-profile (ACX Series routers with ATM IMA pseudowire interfaces) on page 5338</a> |
| <b>Output Fields</b>            | Table 465 on page 5336 describes the output fields for the <b>show class-of-service traffic-control-profile</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                        |

**Table 465: show class-of-service traffic-control-profile Output Fields**

| Field Name                     | Field Description                                                                                                                                                                                                                                                                                            |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Traffic control profile</b> | Name of the traffic control profile.                                                                                                                                                                                                                                                                         |
| <b>Index</b>                   | Index number of the traffic control profile.                                                                                                                                                                                                                                                                 |
| <b>ATM Service</b>             | (MX Series routers with ATM Multi-Rate CE MIC) Configured category of ATM service. Possible values: <ul style="list-style-type: none"> <li>cbr—Constant bit rate.</li> <li>rtvbr—Real time variable bit rate.</li> <li>nrtvbr—Non real time variable bit rate.</li> <li>ubr—Unspecified bit rate.</li> </ul> |
| <b>Maximum Burst Size</b>      | Configured maximum burst size, in cells.                                                                                                                                                                                                                                                                     |
| <b>Peak rate</b>               | Configured peak rate, in cps.                                                                                                                                                                                                                                                                                |



Table 465: show class-of-service traffic-control-profile Output Fields (*continued*)

| Field Name                          | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Sustained rate</b>               | Configured sustained rate, in cps.                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Shaping rate</b>                 | Configured shaping rate, in bps.<br><br><b>NOTE:</b> (MX Series routers with ATM Multi-Rate CE MIC) Configured peak rate, in cps.                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Shaping rate burst</b>           | Configured burst size for the shaping rate, in bytes.<br><br><b>NOTE:</b> (MX Series routers with ATM Multi-Rate CE MIC) Configured maximum burst rate, in cells.                                                                                                                                                                                                                                                                                                                                      |
| <b>Shaping rate priority high</b>   | Configured shaping rate for high-priority traffic, in bps.                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Shaping rate priority medium</b> | Configured shaping rate for medium-priority traffic, in bps.                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Shaping rate priority low</b>    | Configured shaping rate for low-priority traffic, in bps.                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Shaping rate excess high</b>     | Configured shaping rate for high-priority excess traffic, in bps.                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Shaping rate excess low</b>      | Configured shaping rate for low-priority excess traffic, in bps.                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Scheduler map</b>                | Name of the associated scheduler map.                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Delay Buffer rate</b>            | Configured delay buffer rate, in bps.                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Excess rate</b>                  | Configured excess rate, in percent or proportion.                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Excess rate high</b>             | Configured excess rate for high priority traffic, in percent or proportion.                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Excess rate low</b>              | Configured excess rate for low priority traffic, in percent or proportion.                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Guaranteed rate</b>              | Configured guaranteed rate, in bps or cps.<br><br><b>NOTE:</b> (MX Series routers with ATM Multi-Rate CE MIC) This value depends on the ATM service category chosen. Possible values: <ul style="list-style-type: none"> <li>• <b>cbr</b>—Guaranteed rate is equal to the configured peak rate in cps.</li> <li>• <b>rtvbr</b>—Guaranteed rate is equal to the configured sustained rate in cps.</li> <li>• <b>nrtvbr</b>—Guaranteed rate is equal to the configured sustained rate in cps.</li> </ul> |
| <b>Guaranteed rate burst</b>        | Configured burst size for the guaranteed rate, in bytes.                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>adjust-minimum</b>               | Configured minimum shaping rate for an adjusted queue, in bps.                                                                                                                                                                                                                                                                                                                                                                                                                                         |



Table 465: show class-of-service traffic-control-profile Output Fields (*continued*)

| Field Name                      | Field Description                                                |
|---------------------------------|------------------------------------------------------------------|
| <b>overhead accounting mode</b> | Configured shaping mode: <b>Frame Mode</b> or <b>Cell Mode</b> . |
| <b>Overhead bytes</b>           | Configured byte adjustment value.                                |

## Sample Output

### show class-of-service traffic-control-profile

```

user@host> show class-of-service traffic-control-profile
Traffic control profile: Profile1, Index: 57625
  Scheduler map: m1
  Delay Buffer rate: 500000
  Guaranteed rate: 1000000

Traffic control profile: Profile2, Index: 57624
  Scheduler map: m2
  Delay Buffer rate: 600000
  Guaranteed rate: 2000000

Traffic control profile: Profile3, Index: 57627
  Scheduler map: m3
  Delay Buffer rate: 800000
  Guaranteed rate: 3000000
  .Excess rate high: proportion 4

Traffic control profile: Profile4, Index: 57626
  Scheduler map: m4
  Delay Buffer rate: 750000
  Guaranteed rate: 4000000
  ..adjust-minimum 20000000

```

### show class-of-service traffic-control-profile (MX Series routers with Clear Channel Multi-Rate CE MIC)

```

user@host> show class-of-service traffic-control-profile
Traffic control profile: at-vbr1, Index: 11395
  ATM Service: RTVBR
  Scheduler map: m3
  overhead accounting mode: Frame Mode
  Shaping rate: 1000 cps
  Shaping rate burst: 500 cells
  Delay Buffer rate: 2000 cps
  Guaranteed rate: 1000 cps

Traffic control profile: foo, Index: 38286
  ATM Service: UBR
  Scheduler map: m3
  overhead accounting mode: Frame Mode

```

### show class-of-service traffic-control-profile (ACX Series routers)

```

user@host> show class-of-service traffic-control-profile
Traffic control profile: foo, Index: 38286
  ATM Service: RTVBR
  Shaping rate: 2000 cps

```



with ATM IMA  
pseudowire interfaces)

Shaping rate burst: 200 cells  
Scheduler map: <default>  
Delay Buffer rate: 1000 cps  
Guaranteed rate: 1700 cps



## show dcbx

|                                 |                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show dcbx                                                                                                                                                                     |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                               |
| <b>Description</b>              | List DCBX status (enabled or disabled) and the interfaces on which DCBX is enabled.                                                                                           |
| <b>Required Privilege Level</b> | view                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show dcbx neighbors on page 4694</a></li> <li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li> </ul> |
| <b>Output Fields</b>            | <a href="#">Table 326 on page 4693</a> lists the output fields for the <b>show dcbx</b> command. Output fields are listed in the approximate order in which they appear.      |

Table 466: show dcbx output fields

| Field Name | Field Description                                                                                                                                                                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DCBX       | Status of DCBX on the switch or for the specified interface: <ul style="list-style-type: none"> <li>• Enabled—DCBX is enabled on the switch or on the specified interface</li> <li>• Disabled—DCBX is disabled on the switch or on the specified interface</li> </ul> |
| Interface  | Name of the interface                                                                                                                                                                                                                                                 |

## Sample Output

```

show dcbx
user@switch> show dcbx
DCBX                               : Enabled
Interface      DCBX
xe-0/0/9.0     enabled
xe-0/0/32.0    enabled
xe-0/0/36.0    enabled

```



## show dcbx neighbors

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <b>show dcbx neighbors</b><br><b>&lt;interface <i>interface-name</i>&gt;</b><br><b>&lt;terse&gt;</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.<br>Command introduced in Junos OS Release 11.3 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | Display information about Data Center Bridging Capability Exchange protocol (DCBX) neighbor interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Options</b>                  | <b>none</b> —Display information about all DCBX neighbor interfaces.<br><br><b><i>interface-name</i></b> —(Optional) Display information for the specified interface.<br><br><b>terse</b> —Display the specified level of output.                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring DCBX Autonegotiation on page 4601</a></li> <li>• <a href="#">Example: Configuring DCBX Application Protocol TLV Exchange on page 4540</a></li> <li>• <a href="#">Example: Configuring an FCoE Transit Switch</a></li> <li>• <a href="#">Example: Configuring DCBX to Support an iSCSI Application</a></li> <li>• <a href="#">Understanding DCB Features and Requirements on page 4389</a></li> <li>• <a href="#">Understanding Data Center Bridging Capability Exchange Protocol for EX Series Switches</a></li> <li>• <a href="#">dcbx on page 4617</a></li> </ul>                   |
| <b>List of Sample Output</b>    | <a href="#">show dcbx neighbors interface (QFX Series, DCBX Version 1.01 Mode) on page 5354</a><br><a href="#">show dcbx neighbors interface (QFX Series, IEEE DCBX Mode) on page 5356</a><br><a href="#">show dcbx neighbors terse (QFX Series) on page 5358</a><br><a href="#">show dcbx neighbors (EX4500 Switch: FCoE Interfaces on Both Local and Peer with PFC Configured Compatibly) on page 5358</a><br><a href="#">show dcbx neighbors (EX4500 Switch: DCBX Interfaces on Local and Peer Are Configured Compatibly with iSCSI Application) on page 5361</a><br><a href="#">show dcbx neighbors (EX4500 Switch: Includes ETS) on page 5363</a> |
| <b>Output Fields</b>            | <a href="#">Table 327 on page 4694</a> lists the output fields for the <b>show dcbx neighbors</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

**Table 467: show dcbx neighbors Output Fields**

| Field Name | Field Description      |
|------------|------------------------|
| Interface  | Name of the interface. |



Table 467: show dcbx neighbors Output Fields (*continued*)

| Field Name             | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parent Interface       | Name of the link aggregation group (LAG) interface to which the DCBX interface belongs.                                                                                                                                                                                                                                                                                                                                                                                                                |
| Active-application-map | Name of the application map applied to the interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Protocol-Mode          | <p>(QFX Series) DCBX protocol mode the interface uses:</p> <ul style="list-style-type: none"> <li>IEEE DCBX Version—The interface uses IEEE DCBX mode.</li> <li>DCBX Version 1.01—The interface uses DCBX version 1.01.</li> </ul> <p><b>NOTE:</b> On interfaces that use the IEEE DCBX mode, the <b>show dcbx neighbors interface <i>interface-name</i></b> operational command does not include application, PFC, or ETS operational state in the output.</p>                                        |
| Protocol-State         | <p>(DCBX Version 1.01 only) DCBX protocol state synchronization status:</p> <ul style="list-style-type: none"> <li><b>in-sync</b>—The local interface received an acknowledge message from the peer to indicate that the peer received a state change message sent by the local interface.</li> <li><b>ack-pending</b>—The local interface has not yet received an acknowledge message from the peer to indicate that the peer received a state change message sent by the local interface.</li> </ul> |
| Local-Advertisement    | <p>(DCBX Version 1.01 only)</p> <p>Status of advertisements that the local interface sends to the peer.</p>                                                                                                                                                                                                                                                                                                                                                                                            |
| Operational version    | Version of the DCBX standard used.                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| sequence-number        | <p>Number of state change messages sent to the peer.</p> <p>If the interface <b>Protocol-State</b> value is <b>in-sync</b>, this number should match the <b>acknowledge-id</b> number in the <b>Peer-Advertisement</b> section.</p> <p>If the interface <b>Protocol-State</b> value is <b>ack-pending</b>, this number does not match the <b>acknowledge-id</b> number in the <b>Peer-Advertisement</b> section.</p>                                                                                   |
| acknowledge-id         | <p>Number of acknowledge messages received from the peer.</p> <p>If the <b>Protocol-State</b> value is <b>in-sync</b>, this number should match the <b>sequence-number</b> value in the <b>Peer-Advertisement</b> section.</p> <p>If the <b>Protocol-State</b> value is <b>ack-pending</b>, this number does not match the <b>sequence-number</b> value in the <b>Peer-Advertisement</b> section.</p>                                                                                                  |



Table 467: show dcbx neighbors Output Fields (*continued*)

| Field Name                 | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Peer-Advertisement</b>  | (DCBX Version 1.01 only)<br><br>Status of advertisements that the peer sends to the local interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Operational version</b> | Version of the DCBX standard used.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>sequence-number</b>     | <p>Number of state change messages the peer sent to the local interface.</p> <p>If this number matches the <b>acknowledge-id</b> number in the <b>Local-Advertisement</b> field, this indicates that the local interface has acknowledged all of the peer's state change messages and is synchronized.</p> <p>If this number does not match the <b>acknowledge-id</b> number in the <b>Local-Advertisement</b> field, this indicates that the peer has not yet received an acknowledgment for a state change message from the local interface.</p>            |
| <b>acknowledge-id</b>      | <p>Number of acknowledge messages the peer has received from the local interface.</p> <p>If this number matches the <b>sequence-number</b> value in the <b>Local-Advertisement</b> field, this indicates that the peer has acknowledged all of the local interface's state change messages and is in synchronization.</p> <p>If this number does not match the <b>sequence-number</b> value in the <b>Local-Advertisement</b> field, this indicates that the peer has not yet sent an acknowledgment for a state change message from the local interface.</p> |



Table 467: show dcbx neighbors Output Fields (*continued*)

| Field Name                        | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Feature: PFC</b>               | Priority-based flow control (PFC) feature DCBX state information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Protocol-State</b>             | (DCBX Version 1.01 only)<br><br>DCBX protocol state synchronization status: <ul style="list-style-type: none"> <li>• <b>ack-pending</b>—The local interface has not yet received an acknowledge message from the peer to indicate that the peer received a PFC state change message sent by the local interface.</li> <li>• <b>in-sync</b>—The local interface received an acknowledge message from the peer to indicate that the peer received a PFC state change message sent by the local interface.</li> <li>• <b>not-applicable</b>—PFC autonegotiation is disabled.</li> </ul> |
| <b>Operational State</b>          | (DCBX Version 1.01 only)<br><br>Operational state of the feature: <b>enabled</b> or <b>disabled</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Local-Advertisement</b>        | Status of advertisements that the local interface sends to the peer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Enable</b>                     | (DCBX Version 1.01 only)<br><br>State that the local interface advertises to the peer: <ul style="list-style-type: none"> <li>• <b>Yes</b>—The feature is enabled.</li> <li>• <b>No</b>—The feature is disabled.</li> </ul>                                                                                                                                                                                                                                                                                                                                                          |
| <b>Willing</b>                    | Willingness of the local interface to learn the PFC configuration from the peer using DCBX: <ul style="list-style-type: none"> <li>• <b>Yes</b>—The local interface is willing to learn the PFC configuration from the peer.</li> <li>• <b>No</b>—The local interface is not willing to learn the PFC configuration from the peer.</li> </ul>                                                                                                                                                                                                                                        |
| <b>Mac auth Bypass Capability</b> | (IEEE DCBX only)<br><br>(QFX Series) Media access controller (MAC) authentication bypass provides access to devices based on MAC address authentication. This is not supported, so the only value seen in the local advertisement field is <b>no</b> .                                                                                                                                                                                                                                                                                                                               |
| <b>Error</b>                      | (DCBX Version 1.01 only)<br><br>Configuration compatibility error status: <ul style="list-style-type: none"> <li>• <b>No</b>—No error detected. Local and peer configuration are compatible.</li> <li>• <b>Yes</b>—Error detected. Local and peer configuration are not compatible.</li> </ul>                                                                                                                                                                                                                                                                                       |



Table 467: show dcbx neighbors Output Fields (*continued*)

| Field Name                                            | Field Description                                                                                                                                                                                                                                                                                                                                    |
|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operational State</b>                              | <p>PFC operational state on the interface:</p> <ul style="list-style-type: none"> <li>• <b>Enabled</b>—PFC is enabled on the interface</li> <li>• <b>Disabled</b>—PFC is disabled on the interface</li> </ul>                                                                                                                                        |
| <b>Maximum Traffic Classes capable to support PFC</b> | <p>Largest number of traffic classes the local interface supports for PFC:</p> <ul style="list-style-type: none"> <li>• <b>6</b> (EX Series switches)</li> <li>• <b>8</b> (QFX Series)</li> </ul>                                                                                                                                                    |
| <b>Code Point</b>                                     | <p>PFC code point, which is specified in the 3-bit class-of-service field in the VLAN header.</p>                                                                                                                                                                                                                                                    |
| <b>Admin Mode</b>                                     | <p>PFC administrative state for each code point on the local interface:</p> <ul style="list-style-type: none"> <li>• <b>Enabled</b>—PFC is enabled for the code point.</li> <li>• <b>Disabled</b>—PFC is disabled for the code point.</li> </ul>                                                                                                     |
| <b>Operational Mode</b>                               | <p>(QFX Series) PFC operational mode for each code point:</p> <ul style="list-style-type: none"> <li>• <b>Enable</b>—PFC is enabled on the code point.</li> <li>• <b>Disable</b>—PFC is disabled on the code point.</li> </ul>                                                                                                                       |
| <b>Peer-Advertisement</b>                             | <p>Status of advertisements that the peer sends to the local interface.</p>                                                                                                                                                                                                                                                                          |
| <b>Enable</b>                                         | <p>(DCBX Version 1.01 only)</p> <p>State that the peer advertises to the local interface:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b>—The feature is enabled.</li> <li>• <b>No</b>—The feature is disabled.</li> </ul>                                                                                                                   |
| <b>Willing</b>                                        | <p>Willingness of the peer to learn the PFC configuration from the local interface using DCBX:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b>—The peer is willing to learn the PFC configuration from the local interface.</li> <li>• <b>No</b>—The peer is not willing to learn the PFC configuration from the local interface.</li> </ul> |
| <b>Error</b>                                          | <p>(DCBX Version 1.01 only)</p> <p>Configuration compatibility error status:</p> <ul style="list-style-type: none"> <li>• <b>No</b>—No error detected. Local and peer configuration are compatible.</li> <li>• <b>Yes</b>—Error detected. Local and peer configuration are not compatible.</li> </ul>                                                |



Table 467: show dcbx neighbors Output Fields (*continued*)

| Field Name                                            | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operational State</b>                              | <p>PFC operational state on the interface:</p> <ul style="list-style-type: none"> <li>• <b>Enabled</b>—PFC is enabled on the interface</li> <li>• <b>Disabled</b>—PFC is disabled on the interface</li> </ul>                                                                                                                                                                                                                                                                                            |
| <b>Mac auth Bypass Capability</b>                     | <p>(IEEE DCBX only)</p> <p>(QFX Series) Media access controller (MAC) authentication bypass provides access to devices based on MAC address authentication. Although the QFX Series does not support this feature, the connected peer might support it. This field reports the peer state:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b>—The connected peer supports MAC authentication bypass.</li> <li>• <b>No</b>—The connected peer does not support MAC authentication bypass.</li> </ul> |
| <b>Maximum Traffic Classes capable to support PFC</b> | <p>Largest number of traffic classes the peer supports for PFC:</p> <ul style="list-style-type: none"> <li>• <b>6</b> (EX Series switches)</li> <li>• <b>8</b> (QFX Series)</li> </ul>                                                                                                                                                                                                                                                                                                                   |
| <b>Code Point</b>                                     | <p>PFC code point, which is specified in the 3-bit class-of-service field in the VLAN header.</p>                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Admin Mode</b>                                     | <p>PFC administrative state for each code point on the peer:</p> <ul style="list-style-type: none"> <li>• <b>Enabled</b>—PFC is enabled for the code point.</li> <li>• <b>Disabled</b>—PFC is disabled for the code point.</li> </ul>                                                                                                                                                                                                                                                                    |



Table 467: show dcbx neighbors Output Fields (*continued*)

| Field Name                  | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Feature: Application</b> | State information for the DCBX application.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Protocol-State</b>       | <p>(DCBX Version 1.01 only)</p> <p>DCBX protocol state synchronization status:</p> <ul style="list-style-type: none"> <li>• <b>in-sync</b>—The local interface received an acknowledge message from the peer to indicate that the peer received an FCoE state change message sent by the local interface.</li> <li>• <b>ack-pending</b>—The local interface has not yet received an acknowledge message from the peer to indicate that the peer received an FCoE state change message sent by the local interface.</li> <li>• <b>not-applicable</b>—The local interface is set to <b>no-auto-negotiation</b> (autonegotiation is disabled). If the interface is associated with an FCoE forwarding class, the interface advertises FCoE capability even if the connected peer does not advertise FCoE capability.</li> </ul> |
| <b>Local-Advertisement</b>  | <p>Status of advertisements that the local interface sends to the peer.</p> <p>If the local interface is set to <b>no-auto-negotiation</b> (autonegotiation is disabled), the local advertisement portion of the output is not shown.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Enable</b>               | <p>(DCBX Version 1.01 only)</p> <p>State that the local interface advertises to the peer:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b>—The feature is enabled.</li> <li>• <b>No</b>—The feature is disabled.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Willing</b>              | <p>(DCBX Version 1.01 only)</p> <p>Willingness of the local interface to learn the FCoE interface state from the peer using DCBX:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b>—The local interface is willing to learn the FCoE interface state from the peer.</li> <li>• <b>No</b>—The local interface is not willing to learn the FCoE interface state from the peer.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Error</b>                | <p>(DCBX Version 1.01 only)</p> <p>Configuration compatibility error status:</p> <ul style="list-style-type: none"> <li>• <b>No</b>—No error detected. The local and peer configuration are compatible.</li> <li>• <b>Yes</b>—Error detected. The local and peer configuration are not compatible.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Appl-Name</b>            | Name of the application:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |



Table 467: show dcbx neighbors Output Fields (*continued*)

| Field Name                            | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Ethernet-Type</b>                  | <p>(DCBX Version 1.01 only)</p> <p>Ethernet type (EtherType) of the application. For example, <b>0x8906</b> indicates the EtherType for the FCoE application. Either the EtherType (for Layer 2 applications) or the Socket Number (for Layer 4 applications) of the application is displayed in the output.</p>                                                                                                                                                                                                                                                            |
| <b>Socket-Number</b>                  | <p>Destination port socket number of the application, if applicable. Either the EtherType (for Layer 2 applications) or the Socket Number (for Layer 4 applications) of the application is displayed in the output.</p>                                                                                                                                                                                                                                                                                                                                                     |
| <b>Priority-Field or Priority-Map</b> | <p>Priority assigned to the application.</p> <p>For EX Series switches, the priority of the FCoE application is determined by the PFC congestion notification profile that has been configured and associated with the FCoE interface. For other applications, the priority is based on the application map.</p>                                                                                                                                                                                                                                                            |
| <b>Status</b>                         | <p>(DCBX Version 1.01 only)</p> <p>Local status when autonegotiation is enabled:</p> <ul style="list-style-type: none"> <li>• <b>Enabled</b>—The application feature is enabled on both the local interface and the peer interface. (The local configuration and the peer configuration match.)</li> <li>• <b>Disabled</b>—The local configuration and the peer configuration do not match.</li> </ul> <p><b>NOTE:</b> If there is a configuration mismatch in one application between the switch and the peer, all the other applications including FCoE are disabled.</p> |
| <b>Peer-Advertisement</b>             | <p>Status of advertisements that the peer sends to the local interface.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Enable</b>                         | <p>(DCBX Version 1.01 only)</p> <p>State that the peer advertises to the local interface:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b>—The feature is enabled.</li> <li>• <b>No</b>—The feature is disabled.</li> </ul>                                                                                                                                                                                                                                                                                                                                          |
| <b>Willing</b>                        | <p>(DCBX Version 1.01 only)</p> <p>Willingness of the peer to learn the FCoE interface state from the local interface using DCBX:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b>—The peer is willing to learn the FCoE interface state from the local interface.</li> <li>• <b>No</b>—The peer is not willing to learn the FCoE interface state from the local interface.</li> </ul>                                                                                                                                                                               |



Table 467: show dcbx neighbors Output Fields (*continued*)

| Field Name                            | Field Description                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Error</b>                          | (DCBX Version 1.01 only)<br><br>Configuration compatibility error status: <ul style="list-style-type: none"> <li>• <b>No</b>—No error detected. Local and peer configuration are compatible.</li> <li>• <b>Yes</b>—Error detected. Local and peer configuration are not compatible.</li> </ul>                                                                           |
| <b>Appl-Name</b>                      | Name of the application: <ul style="list-style-type: none"> <li>• <b>FCoE</b>—Fibre Channel over Ethernet</li> </ul>                                                                                                                                                                                                                                                     |
| <b>Ethernet-Type</b>                  | Ethernet type (EtherType) of the application. For example, <b>0x8906</b> indicates the EtherType for the FCoE application. Either the EtherType (for Layer 2 applications) or the Socket-Number (for Layer 4 applications) of the application is displayed in the output.                                                                                                |
| <b>Socket-Number</b>                  | Destination port socket number of the application, if applicable. Either the EtherType (for Layer 2 applications) or the Socket Number (for Layer 4 applications) of the application is displayed in the output.                                                                                                                                                         |
| <b>Priority-Field or Priority-Map</b> | Priority assigned to the application.                                                                                                                                                                                                                                                                                                                                    |
| <b>Status</b>                         | (DCBX Version 1.01 only)<br><br>Peer interface status: <ul style="list-style-type: none"> <li>• <b>Enabled</b>—The application feature is enabled on both the local interface and the peer interface. (The local configuration and the peer configuration match.)</li> <li>• <b>Disabled</b>—The local configuration and the peer configuration do not match.</li> </ul> |



Table 467: show dcbx neighbors Output Fields (*continued*)

| Field Name                 | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Feature: ETS</b>        | Enhanced Transmission Selection (ETS) DCBX state information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Protocol-State</b>      | (DCBX Version 1.01 only)<br><br>ETS protocol state synchronization status: <ul style="list-style-type: none"> <li>• <b>in-sync</b>—The local interface received an acknowledge message from the peer to indicate that the peer received an ETS state change message sent by the local interface.</li> <li>• <b>ack-pending</b>—The local interface has not yet received an acknowledge message from the peer to indicate that the peer received an ETS state change message sent by the local interface.</li> </ul>                                                          |
| <b>Operational State</b>   | (DCBX Version 1.01 only)<br><br>Operational state of the feature, <b>enabled</b> or <b>disabled</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Local-Advertisement</b> | Status of advertisements that the local interface sends to the peer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Enable</b>              | (DCBX Version 1.01 only)<br><br>State that the local interface advertises to the peer: <ul style="list-style-type: none"> <li>• <b>Yes</b>—The feature is enabled.</li> <li>• <b>No</b>—The feature is disabled.</li> </ul>                                                                                                                                                                                                                                                                                                                                                  |
| <b>TLV Type</b>            | (IEEE DCBX only)<br><br>Type of ETS TLV: <ul style="list-style-type: none"> <li>• <b>Configuration</b>—Advertises the Configuration TLV, which communicates the local ETS configuration to the peer but does not ask the peer to use the configuration.</li> <li>• <b>Recommendation</b>—Advertises the Recommendation TLV, which communicates the local ETS configuration to the peer, and if the peer is “willing,” configures the peer interface to match the local ETS configuration.</li> <li>• <b>Recommendation-or-Configuration</b>—Advertises both TLVs.</li> </ul> |
| <b>Willing</b>             | Willingness of the local interface to learn the ETS state from the peer using DCBX (EX Series switches always advertise <b>No</b> for this field): <ul style="list-style-type: none"> <li>• <b>Yes</b>—Local interface is willing to learn the ETS state from the peer.</li> <li>• <b>No</b>—Local interface is not willing to learn the ETS state from the peer.</li> </ul>                                                                                                                                                                                                 |
| <b>Credit Based Shaper</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |



Table 467: show dcbx neighbors Output Fields (*continued*)

| Field Name                                            | Field Description                                                                                                                                                                                                                                                                                               |
|-------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                       | (IEEE DCBX only)<br><br>Alternative method of flow control to buffer-to-buffer credit. The QFX Series does not support a credit-based shaper, so the value of this field is always <b>No</b> .                                                                                                                  |
| <b>Error</b>                                          | (DCBX Version 1.01 only)<br><br>Configuration error status: <ul style="list-style-type: none"> <li>• <b>No</b>—No error. This should always be the switch ETS error state.</li> <li>• <b>Yes</b>—Error detected.</li> </ul>                                                                                     |
| <b>Maximum Traffic Classes capable to support PFC</b> | (DCBX Version 1.01 only)<br><br>Largest number of traffic classes the local interface supports for PFC.                                                                                                                                                                                                         |
| <b>Maximum Traffic Classes supported</b>              | (IEEE DCBX only)<br><br>Largest number of traffic classes the local interface supports for ETS. (EX Series switches support only one traffic class for ETS. However, a different value might be shown for this field.)                                                                                          |
| <b>Code Point</b>                                     | PFC code point, which is specified in the 3-bit class-of-service field in the VLAN header.                                                                                                                                                                                                                      |
| <b>Priority-Group</b>                                 | Class-of-service (CoS) priority group (forwarding class set) identification number.                                                                                                                                                                                                                             |
| <b>Percentage B/W</b>                                 | Configured minimum percentage of link bandwidth allocated to the priority group. Only explicitly configured values appear in this output column. If the link bandwidth is the default percentage, it is not shown. (EX Series switches allocate 100% of link bandwidth to the default priority group, group 7.) |
| <b>Transmission Selection Algorithm</b>               | (IEEE DCBX only)<br><br>The transmission selection algorithm used by the interface. The QFX Series supports ETS but does not support using the credit-based shaper algorithm, so the only value shown in this field is <b>ETS</b> .                                                                             |
| <b>Peer-Advertisement</b>                             | Status of advertisements that the peer sends to the local interface.                                                                                                                                                                                                                                            |
| <b>Enable</b>                                         |                                                                                                                                                                                                                                                                                                                 |



Table 467: show dcbx neighbors Output Fields (*continued*)

| Field Name                                            | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                       | (DCBX Version 1.01 only)<br><br>State that the peer advertises to the local interface: <ul style="list-style-type: none"> <li>• <b>Yes</b>—The feature is enabled.</li> <li>• <b>No</b>—The feature is disabled.</li> </ul>                                                                                                                                                                                                                                                                                                                                               |
| <b>TLV Type</b>                                       | (IEEE DCBX only)<br><br>Type of ETS TLV: <ul style="list-style-type: none"> <li>• <b>Configuration</b>—Advertises the Configuration TLV, which communicates the local ETS configuration to the peer but does not ask the peer to use the configuration.</li> <li>• <b>Recommendation</b>—Advertises the Recommendation TLV, which communicates the local ETS configuration to the peer, and if the peer is "willing," configures the peer interface to match the local ETS configuration.</li> <li>• <b>Configuration/Recommendation</b>—Advertises both TLVs.</li> </ul> |
| <b>Willing</b>                                        | Willingness of the peer to learn the ETS state from the local interface using DCBX: <ul style="list-style-type: none"> <li>• <b>Yes</b>—Peer is willing to learn the ETS state from the local interface.</li> <li>• <b>No</b>—Peer is not willing to learn the ETS state from the local interface.</li> </ul>                                                                                                                                                                                                                                                             |
| <b>Credit Based Shaper</b>                            | (IEEE DCBX only)<br><br>Alternative method of flow control to buffer-to-buffer credit. The QFX Series does not support a credit-based shaper, so the value of this field is always <b>No</b> .                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Error</b>                                          | (DCBX Version 1.01 only)<br><br>Configuration error status of the peer: <ul style="list-style-type: none"> <li>• <b>No</b>—No error in peer ETS TLV.</li> <li>• <b>Yes</b>—Error in peer ETS TLV.</li> </ul>                                                                                                                                                                                                                                                                                                                                                              |
| <b>Maximum Traffic Classes capable to support PFC</b> | (DCBX Version 1.01 only)<br><br>Largest number of traffic classes the local interface supports for PFC.                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Maximum Traffic Classes supported</b>              | (IEEE DCBX only)<br><br>Largest number of traffic classes the local interface supports for ETS. (EX Series switches support only one traffic class for ETS. However, a different value might be shown for this field.)                                                                                                                                                                                                                                                                                                                                                    |
| <b>Code Point</b>                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |



Table 467: show dcbx neighbors Output Fields (*continued*)

| Field Name                       | Field Description                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                  | PFC code point, which is specified in the 3-bit class-of-service field in the VLAN header.                                                                                                                                                                                                                                                                                                                         |
| Priority-Group                   | CoS priority group (forwarding class set) identification number.                                                                                                                                                                                                                                                                                                                                                   |
| Percentage B/W                   | Configured minimum percentage of link bandwidth allocated to the priority group. (EX Series switches allocate 100% of link bandwidth to the default priority group, group 7.)                                                                                                                                                                                                                                      |
| Transmission Selection Algorithm | (IEEE DCBX only)<br><br>Transmission selection algorithm used by the interface. The QFX Series supports ETS but does not support using the credit-based shaper algorithm, so the only value shown in this field is <b>ETS</b> .                                                                                                                                                                                    |
| PFC                              | (QFX Series, <b>terse</b> option only) DCBX TLV advertisement state for PFC: <ul style="list-style-type: none"> <li>• Disabled—PFC configuration matches the configuration on the connected peer and PFC is disabled</li> <li>• Enabled—PFC configuration matches the configuration on the connected peer and PFC is enabled</li> <li>• Not Advt—Interface does not advertise PFC to the connected peer</li> </ul> |
| ETS                              | ( <b>terse</b> option only) Local DCBX TLV advertisement state for ETS: <ul style="list-style-type: none"> <li>• Advt—Interface advertises ETS TLVs</li> <li>• Disabled—ETS is disabled on the interface (interface does not advertise ETS)</li> </ul>                                                                                                                                                             |
| ETS Rec                          | ( <b>terse</b> option only) DCBX TLV peer advertisement state for ETS (state received from the connected DCBX peer): <ul style="list-style-type: none"> <li>• Advt—Peer interface advertises ETS TLVs</li> <li>• Not Advt—Peer interface does not advertise ETS</li> </ul> <p><b>NOTE:</b> When the DCBX mode is DCBX version 1.01, no peer information is displayed.</p>                                          |



Table 467: show dcbx neighbors Output Fields (*continued*)

| Field Name | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Version    | <p>(<b>terse</b> option only) The DCBX version used on the interface and whether the DCBX version was autonegotiated or explicitly configured:</p> <ul style="list-style-type: none"><li>• <b>IEEE</b>—The interface uses IEEE DCBX.</li><li>• <b>1.01</b>—The interface uses DCBX version 1.01.</li></ul> <p>When the DCBX version used is the result of autonegotiation, the term (<b>Auto</b>) appears next to the version. For example, <b>IEEE (Auto)</b> indicates that the interface autonegotiated with the connected peer to use IEEE DCBX. Autonegotiation is enabled by default.</p> |

## Sample Output

```
show dcbx neighbors interface (QFX Series, user@switch> show dcbx neighbors interface xe-0/0/0
Interface : xe-0/0/0.0 - Parent Interface: ae0.0
Active-application-map: app-map-1
```



## DCBX Version 1.01 Mode)

Protocol-State: in-sync  
Protocol-Mode: DCBX Version 1.01

Local-Advertisement:  
Operational version: 1  
sequence-number: 130, acknowledge-id: 102

Peer-Advertisement:  
Operational version: 1  
sequence-number: 102, acknowledge-id: 130

Feature: PFC, Protocol-State: in-sync

Operational State: Enabled

Local-Advertisement:  
Enable: Yes, Willing: No, Error: No  
Maximum Traffic Classes capable to support PFC: 8

| Code Point | Admin Mode | Operational Mode |
|------------|------------|------------------|
| 000        | Disabled   | Disable          |
| 001        | Disabled   | Disable          |
| 010        | Disabled   | Disable          |
| 011        | Enabled    | Enable           |
| 100        | Enabled    | Enable           |
| 101        | Disabled   | Disable          |
| 110        | Disabled   | Disable          |
| 111        | Disabled   | Disable          |

Peer-Advertisement:  
Enable: Yes, Willing: No, Error: No  
Maximum Traffic Classes capable to support PFC: 8

| Code Point | Admin Mode |
|------------|------------|
| 000        | Disabled   |
| 001        | Disabled   |
| 010        | Disabled   |
| 011        | Enabled    |
| 100        | Enabled    |
| 101        | Disabled   |
| 110        | Disabled   |
| 111        | Disabled   |

Feature: Application, Protocol-State: in-sync

Local-Advertisement:  
Enable: Yes, Willing: No, Error: No

| AppI-Name | Ethernet-Type | Socket-Number | Priority-Map | Status  |
|-----------|---------------|---------------|--------------|---------|
| FCoE      | 0x8906        |               | 00001110     | Enabled |
| iSCSI     |               | 3260          | 10000000     | Enabled |

Peer-Advertisement:  
Enable: Yes, Willing: Yes, Error: No

| AppI-Name | Ethernet-Type | Socket-Number | Priority-Map | Status  |
|-----------|---------------|---------------|--------------|---------|
| FCoE      | 0x8906        | N/A           | 00001110     | Enabled |



Feature: ETS, Protocol-State: in-sync

Operational State: Enabled

Local-Advertisement:

Enable: Yes, Willing: No, Error: No

Maximum Traffic Classes capable to support PFC: 8

| Code Point | Priority-Group |
|------------|----------------|
| 000        | 0              |
| 001        | 7              |
| 010        | 7              |
| 011        | 7              |
| 100        | 0              |
| 101        | 1              |
| 110        | 1              |
| 111        | 7              |

| Priority-Group | Percentage B/W |
|----------------|----------------|
| 0              | 40%            |
| 1              | 5%             |

Peer-Advertisement:

Enable: Yes, Willing: No, Error: No

Maximum Traffic Classes capable to support PFC: 8

| Code Point | Priority-Group |
|------------|----------------|
| 000        | 0              |
| 001        | 7              |
| 010        | 7              |
| 011        | 7              |
| 100        | 0              |
| 101        | 1              |
| 110        | 1              |
| 111        | 7              |

| Priority-Group | Percentage B/W |
|----------------|----------------|
| 0              | 40%            |
| 1              | 5%             |

**show dcbx neighbors  
interface (QFX Series,  
IEEE DCBX Mode)**

user@switch> **show dcbx neighbors interface xe-0/0/0**

Interface : xe-0/0/0.0 - Parent Interface: ae0.0

Active-application-map: app-map-1

Protocol-Mode: IEEE-DCBX Version

Feature: PFC

Local-Advertisement:

Willing: No

Mac auth Bypass Capability: No

Operational State: Enabled

Maximum Traffic Classes capable to support PFC: 8

| Code Point | Admin Mode |
|------------|------------|
| 000        | Disabled   |
| 001        | Disabled   |
| 010        | Disabled   |



|     |          |
|-----|----------|
| 011 | Enabled  |
| 100 | Enabled  |
| 101 | Disabled |
| 110 | Disabled |
| 111 | Disabled |

## Peer-Advertisement:

Willing: No  
 Mac auth Bypass Capability: No  
 Operational State: Enabled

Maximum Traffic Classes capable to support PFC: 8

| Code Point | Admin Mode |
|------------|------------|
| 000        | Disabled   |
| 001        | Disabled   |
| 010        | Disabled   |
| 011        | Enabled    |
| 100        | Enabled    |
| 101        | Disabled   |
| 110        | Disabled   |
| 111        | Disabled   |

## Feature: Application

## Local-Advertisement:

| Appl-Name | Ethernet-Type | Socket-Number | Priority-field |
|-----------|---------------|---------------|----------------|
| FCoE      | 0x8906        |               | 00001110       |
| iSCSI     |               | 3260          | 10000000       |

## Peer-Advertisement:

| Appl-Name | Ethernet-Type | Socket-Number | Priority-field |
|-----------|---------------|---------------|----------------|
| FCoE      | 0x8906        | N/A           | 00001110       |

## Feature: ETS

## Local-Advertisement:

TLV Type: Configuration/Recommendation  
 Willing: No  
 Credit Based Shaper: No  
 Maximum Traffic Classes supported: 3

| Code Point | Priority-Group |
|------------|----------------|
| 000        | 0              |
| 001        | 7              |
| 010        | 7              |
| 011        | 7              |
| 100        | 0              |
| 101        | 1              |
| 110        | 1              |
| 111        | 7              |

| Priority-Group | Percentage B/W |
|----------------|----------------|
| 0              | 40%            |
| 1              | 5%             |

| Priority-Group | Transmission Selection Algorithm |
|----------------|----------------------------------|
| 0              | Enhanced Transmission Selection  |
| 1              | Enhanced Transmission Selection  |



## Peer-Advertisement:

TLV Type: Configuration

Willing: No

Credit Based Shaper: No

| Code Point | Priority-Group |
|------------|----------------|
| 000        | 0              |
| 001        | 7              |
| 010        | 7              |
| 011        | 7              |
| 100        | 0              |
| 101        | 1              |
| 110        | 1              |
| 111        | 7              |

| Priority-Group | Percentage B/W |
|----------------|----------------|
| 0              | 40%            |
| 1              | 5%             |

| Priority-Group | Transmission Selection Algorithm |
|----------------|----------------------------------|
| 0              | Enhanced Transmission Selection  |
| 1              | Enhanced Transmission Selection  |

## Peer-Advertisement:

TLV Type: Recommendation

| Code Point | Priority-Group |
|------------|----------------|
| 000        | 0              |
| 001        | 7              |
| 010        | 7              |
| 011        | 7              |
| 100        | 0              |
| 101        | 1              |
| 110        | 1              |
| 111        | 7              |

| Priority-Group | Percentage B/W |
|----------------|----------------|
| 0              | 40%            |
| 1              | 5%             |

| Priority-Group | Transmission Selection Algorithm |
|----------------|----------------------------------|
| 0              | Enhanced Transmission Selection  |
| 1              | Enhanced Transmission Selection  |

**show dcbx neighbors  
terse (QFX Series)**user@switch> **show dcbx neighbors terse**

| Interface   | Parent<br>Interface | PFC      | ETS      | ETS      | Version<br>Rec |
|-------------|---------------------|----------|----------|----------|----------------|
| xe-0/0/8.0  | -                   | Enabled  | Advt     | Advt     | IEEE (Auto)    |
| xe-0/0/9.0  | -                   | Disabled | Disabled |          | 1.01           |
| xe-0/0/11.0 | ae0.0               | Enabled  | Advt     | Advt     | IEEE (Auto)    |
| xe-0/0/12.0 | ae0.0               | Enabled  | Advt     | Advt     | IEEE (Auto)    |
| xe-0/0/32.0 | -                   | Enabled  | Advt     | Not Advt | IEEE           |
| xe-0/0/36.0 | -                   | Not Advt | Advt     | Advt     | IEEE           |

**show dcbx neighbors**user@switch> **show dcbx neighbors interface xe-0/0/14**



(EX4500 Switch: FCoE  
Interfaces on Both  
Local and Peer with

Interface : xe-0/0/14.0 - Parent Interface: ae0.0  
Protocol-State: in-sync

Local-Advertisement:



**PFC Configured  
Compatibly)**

Operational version: 0  
sequence-number: 6, acknowledge-id: 6

Peer-Advertisement:  
Operational version: 0  
sequence-number: 6, acknowledge-id: 6

Feature: PFC, Protocol-State: in-sync

Operational State: Enabled

Local-Advertisement:  
Enable: Yes, Willing: No, Error: No  
Maximum Traffic Classes capable to support PFC: 6

| Code Point | Admin Mode |
|------------|------------|
| 000        | Disabled   |
| 001        | Disabled   |
| 010        | Disabled   |
| 011        | Enabled    |
| 100        | Disabled   |
| 101        | Disabled   |
| 110        | Disabled   |
| 111        | Disabled   |

Peer-Advertisement:  
Enable: Yes, Willing: No, Error: No  
Maximum Traffic Classes capable to support PFC: 6

| Code Point | Admin Mode |
|------------|------------|
| 000        | Disabled   |
| 001        | Disabled   |
| 010        | Disabled   |
| 011        | Enabled    |
| 100        | Disabled   |
| 101        | Disabled   |
| 110        | Disabled   |
| 111        | Disabled   |

Feature: Application, Protocol-State: in-sync

Local-Advertisement:  
Enable: Yes, Willing: No, Error: No <<< Error bit will not be set as  
there is no miss configuration between local and peer.

| Appl-Name | Ethernet-Type | Socket-Number | Priority-Map | Status  |
|-----------|---------------|---------------|--------------|---------|
| FCoE      | 0x8906        |               | 00001000     | Enabled |

Peer-Advertisement:  
Enable: Yes, Willing: No, Error: No

| Status  | Appl-Name | Ethernet-Type | Socket-Number | Priority-Map |
|---------|-----------|---------------|---------------|--------------|
| Enabled | FCoE      | 0x8906        |               | 00001000     |



show dcbx neighbors  
(EX4500 Switch:  
DCBX Interfaces on  
Local and Peer Are

```
user@switch> show dcbx neighbors interface xe-0/0/14  
  
Interface : xe-0/0/14.0 - Parent Interface: ae0.0  
  
Protocol-State: in-sync
```



Configured Compatibly  
with iSCSI Application)

Active-application-map: iscsi-map

Local-Advertisement:

Operational version: 0

sequence-number: 9, acknowledge-id: 12

Peer-Advertisement:

Operational version: 0

sequence-number: 12, acknowledge-id: 9

Feature: PFC, Protocol-State: in-sync

Operational State: Enabled

Local-Advertisement:

Enable: Yes, Willing: No, Error: No

Maximum Traffic Classes capable to support PFC: 6

| Code Point | Admin Mode |
|------------|------------|
| 000        | Disabled   |
| 001        | Disabled   |
| 010        | Disabled   |
| 011        | Enabled    |
| 100        | Disabled   |
| 101        | Disabled   |
| 110        | Disabled   |
| 111        | Disabled   |

Peer-Advertisement:

Enable: Yes, Willing: No, Error: No

Maximum Traffic Classes capable to support PFC: 6

| Code Point | Admin Mode |
|------------|------------|
| 000        | Disabled   |
| 001        | Disabled   |
| 010        | Disabled   |
| 011        | Enabled    |
| 100        | Disabled   |
| 101        | Disabled   |
| 110        | Disabled   |
| 111        | Disabled   |

Feature: Application, Protocol-State: in-sync

Local-Advertisement:

Enable: Yes, Willing: No, Error: No

| App1-Name | Ethernet-Type | Socket-Number | Priority-Map | Status  |
|-----------|---------------|---------------|--------------|---------|
| FCoE      | 0x8906        |               | 00001000     | Enabled |
| iscsi     |               | 3260          | 00100000     | Enabled |

Peer-Advertisement:

Enable: Yes, Willing: No, Error: No

| App1-Name | Ethernet-Type | Socket-Number | Priority-Map | Status |
|-----------|---------------|---------------|--------------|--------|
|-----------|---------------|---------------|--------------|--------|



|       |        |          |         |
|-------|--------|----------|---------|
| FCoE  | 0x8906 | 00001000 | Enabled |
| iscsi | 3260   | 00100000 | Enabled |

**show dcbx neighbors**  
(EX4500 Switch:  
Includes ETS)

user@switch> **show dcbx neighbors interface xe-0/0/3**

Interface : xe-0/0/3.0  
Protocol-State: in-sync  
Active-application-map: map\_iscsi  
  
Local-Advertisement:  
Operational version: 0  
sequence-number: 1, acknowledge-id: 5

Peer-Advertisement:  
Operational version: 0  
sequence-number: 5, acknowledge-id: 1

Feature: PFC, Protocol-State: in-sync

Operational State: Enabled

Local-Advertisement:  
Enable: Yes, Willing: No, Error: No  
Maximum Traffic Classes capable to support PFC: 6

| Code Point | Admin Mode |
|------------|------------|
| 000        | Enabled    |
| 001        | Enabled    |
| 010        | Disabled   |
| 011        | Disabled   |
| 100        | Disabled   |
| 101        | Disabled   |
| 110        | Disabled   |
| 111        | Disabled   |

Peer-Advertisement:  
Enable: Yes, Willing: Yes, Error: No  
Maximum Traffic Classes capable to support PFC: 8

| Code Point | Admin Mode |
|------------|------------|
| 000        | Enabled    |
| 001        | Disabled   |
| 010        | Disabled   |
| 011        | Disabled   |
| 100        | Enabled    |
| 101        | Disabled   |
| 110        | Disabled   |
| 111        | Disabled   |

Feature: Application, Protocol-State: in-sync

Local-Advertisement:  
Enable: Yes, Willing: No, Error: No

| App1-Name | Ethernet-Type | Socket-Number | Priority-Map | Status  |
|-----------|---------------|---------------|--------------|---------|
| FCoE      | 0x8906        |               | 00000001     | Enabled |
| iscsi     |               | 3260          | 00000010     | Enabled |



## Peer-Advertisement:

Enable: Yes, Willing: Yes, Error: No

| App1-Name | Ethernet-Type | Socket-Number | Priority-Map | Status  |
|-----------|---------------|---------------|--------------|---------|
| FCoE      | 0x8906        |               | 00001000     | Enabled |
| iscsi     |               | 3260          | 00010000     | Enabled |

Feature: ETS, Protocol-State: in-sync

Operational State: Enabled

## Local-Advertisement:

Enable: Yes, Willing: No, Error: No

Maximum Traffic Classes supported : 3

| Code Point | Priority-Group |
|------------|----------------|
| 000        | 7              |
| 001        | 7              |
| 010        | 7              |
| 011        | 7              |
| 100        | 7              |
| 101        | 7              |
| 110        | 7              |
| 111        | 7              |

| Priority-Group | Percentage B/W |
|----------------|----------------|
| 7              | 100%           |

## Peer-Advertisement:

Enable: Yes, Willing: Yes, Error: No

Maximum Traffic Classes supported : 8

| Code Point | Priority-Group |
|------------|----------------|
| 000        | 0              |
| 001        | 1              |
| 010        | 0              |
| 011        | 0              |
| 100        | 2              |
| 101        | 0              |
| 110        | 0              |
| 111        | 0              |

| Priority-Group | Percentage B/W |
|----------------|----------------|
| 0              | 30%            |
| 1              | 40%            |
| 2              | 30%            |



## show interfaces queue

**Syntax** show interfaces queue  
 <aggregate | remaining-traffic>  
 <both-ingress-egress>  
 <egress>  
 <forwarding-class *forwarding-class*>  
 <ingress>  
 <interface-name *interface-name*>  
 <l2-statistics>  
 <remaining-traffic>

**Release Information** Command introduced before Junos OS Release 7.4.  
**both-ingress-egress**, **egress**, and **ingress** options introduced in Junos OS Release 7.6.  
 Command introduced in Junos OS Release 11.1 for the QFX Series.  
**l2-statistics** option introduced in Junos OS Release 12.1.

**Description** Display class-of-service (CoS) queue information for physical interfaces.

**Options** **none**—Show detailed CoS queue statistics for all physical interfaces.

**aggregate**—(Optional) Display the aggregated queuing statistics of all logical interfaces that have traffic-control profiles configured. (Not on the QFX Series.)

**both-ingress-egress**—(Optional) On Gigabit Ethernet Intelligent Queuing 2 (IQ2) PICs, display both ingress and egress queue statistics. (Not on the QFX Series.)

**egress**—(Optional) Display egress queue statistics.

**forwarding-class *forwarding-class***—(Optional) Forwarding class name for this queue. Shows detailed CoS statistics for the queue associated with the specified forwarding class.

**ingress**—(Optional) On Gigabit Ethernet IQ2 PICs, display ingress queue statistics. (Not on the QFX Series.)

**interface-name *interface-name***—(Optional) Show detailed CoS queue statistics for the specified interface.

**l2-statistics**—(optional) Display layer 2 statistics for MLPPP, FRF.15, and FRF.16 bundles

### Overhead for Layer 2 Statistics

Transmitted packets and transmitted byte counts are displayed for the layer 2 level with the addition of encapsulation overheads applied for fragmentation, as shown in [Table 170 on page 2206](#). Others counters, such as packets and bytes queued (input) and drop counters, are displayed at the layer 3 level. In the case of link fragmentation and interleaving (LFI) for which not fragmentation is applied, corresponding layer 2 overheads are added, as shown in [Table 170 on page 2206](#).



Table 468: Layer 2 Overhead, Transmitted Packets/Bytes

| Protocol       | Fragmentation       |                            | LFI |
|----------------|---------------------|----------------------------|-----|
|                | First fragmentation | Second to n fragmentations |     |
|                | Bytes               | Bytes                      |     |
| MLPPP (Long)   | 13                  | 12                         | 8   |
| MLPPP (short)  | 11                  | 10                         | 8   |
| MLFR (FRF15)   | 12                  | 10                         | 8   |
| MFR (FRF16)    | 10                  | 8                          | -   |
| MCMLPPP(Long)  | 13                  | 12                         | -   |
| MCMLPPP(Short) | 11                  | 10                         | -   |



## Layer 2 Statistics - Fragmentation Overhead Calculation

### MLPPP/MC-MLPPP Overhead details:

=====

#### Fragment 1:

|                                     |                      |
|-------------------------------------|----------------------|
| Outer PPP header                    | : 4 bytes            |
| Long or short sequence MLPPP header | : 4 bytes or 2 bytes |
| Inner PPP header                    | : 1 byte             |
| HDLC flag and FCS bytes             | : 4 bytes            |

#### Fragments 2 .. n :

|                                     |                      |
|-------------------------------------|----------------------|
| Outer PPP header                    | : 4 bytes            |
| Long or short sequence MLPPP header | : 4 bytes or 2 bytes |
| HDLC flag and FCS bytes             | : 4 bytes            |

### MLFR (FRF15) Overhead details:

=====

#### Fragment 1:

|                     |           |
|---------------------|-----------|
| Framereelay header  | : 2 bytes |
| Control,NLPID       | : 2 bytes |
| Fragmentaion header | : 2 bytes |
| Inner proto         | : 2 bytes |
| HDLC flag and FCS   | : 4 bytes |

#### Fragments 2 ...n :

|                     |           |
|---------------------|-----------|
| Framereelay header  | : 2 bytes |
| Control,NLPID       | : 2 bytes |
| Fragmentaion header | : 2 bytes |
| HDLC flag and FCS   | : 4 bytes |

### MFR (FRF16) Overhead details:

=====

#### Fragment 1:

|                     |           |
|---------------------|-----------|
| Fragmentaion header | : 2 bytes |
| Framereelay header  | : 2 bytes |
| Inner proto         | : 2 bytes |
| HDLC flag and FCS   | : 4 bytes |

#### Fragments 2 ...n :

|                     |           |
|---------------------|-----------|
| Fragmentaion header | : 2 bytes |
| Framereelay header  | : 2 bytes |
| HDLC flag and FCS   | : 4 bytes |

## Overhead with LFI

### MLPPP(Long & short sequence):

=====

|                   |           |
|-------------------|-----------|
| Outer PPP header  | : 4 bytes |
| HDLC flag and FCS | : 4 bytes |

### MLFR (FRF15):

=====

|                    |           |
|--------------------|-----------|
| Framereelay header | : 2 bytes |
| Control,NLPID      | : 2 bytes |
| HDLC flag and FCS  | : 4 bytes |

The following examples show overhead for different cases:



- A 1000-byte packet is sent to a mlppp bundle without any fragmentation. At the layer 2 level, bytes transmitted is 1013 in 1 packet. This overhead is for MLPPP long sequence encap.
- A 1000-byte packet is sent to a mlppp bundle with a fragment threshold of 250byte. At the layer 2 level, bytes transmitted is 1061 bytes in 5 packets.
- A 1000-byte LFI packet is sent to an mlppp bundle. At the layer 2 level, bytes transmitted is 1008 in 1 packet.

**remaining-traffic**—(Optional) Display the queuing statistics of all logical interfaces that do not have traffic-control profiles configured. (Not on the QFX Series.)

**Additional Information** On M Series routers (except for the M320 and M120 routers), this command is valid only for a PIC installed on an enhanced Flexible PIC Concentrator (FPC).

Queue statistics for aggregated interfaces are supported on the M Series and T Series routers only. Statistics for an aggregated interface are the summation of the queue statistics of the child links of that aggregated interface. You can view the statistics for a child interface by using the **show interfaces statistics** command for that child interface.

When you configure tricolor marking on a 10-port 1-Gigabit Ethernet PIC, for queues 6 and 7 only, the output does not display the number of queued bytes and packets, or the number of bytes and packets dropped because of RED. If you do not configure tricolor marking on the interface, these statistics are available for all queues.

For the 4-port Channelized OC12 IQE PIC and 1-port Channelized OC48 IQE PIC, the **Packet Forwarding Engine Chassis Queues** field represents traffic bound for a particular physical interface on the PIC. For all other PICs, the **Packet Forwarding Engine Chassis Queues** field represents the total traffic bound for the PIC.

For Gigabit Ethernet IQ2 PICs, the **show interfaces queue** command output does not display the number of tail-dropped packets. This limitation does not apply to Packet Forwarding Engine chassis queues.

When fragmentation occurs on the egress interface, the first set of packet counters shows the postfragmentation values. The second set of packet counters (under the **Packet Forwarding Engine Chassis Queues** field) shows the prefragmentation values.

The behavior of the **egress** queues for the **Routing Engine-Generated Traffic** is not same as the configured queue for MLPPP and MFR configurations.

For information about how to configure CoS, see the Junos® OS Network Interfaces. For related CoS operational mode commands, see the Junos OS Operational Mode Commands.

**Required Privilege Level** view

**List of Sample Output** [show interfaces queue \(Aggregated Ethernet on a T320 Router\) on page 5374](#)  
[show interfaces queue \(Fast Ethernet on a J4300 Router\) on page 5375](#)



[show interfaces queue \(Gigabit Ethernet on a T640 Router\) on page 5376](#)  
[show interfaces queue aggregate \(Gigabit Ethernet Enhanced DPC\) on page 5376](#)  
[show interfaces queue \(Gigabit Ethernet IQ2 PIC\) on page 5380](#)  
[show interfaces queue both-ingress-egress \(Gigabit Ethernet IQ2 PIC\) on page 5383](#)  
[show interfaces queue ingress \(Gigabit Ethernet IQ2 PIC\) on page 5386](#)  
[show interfaces queue egress \(Gigabit Ethernet IQ2 PIC\) on page 5386](#)  
[show interfaces queue remaining-traffic \(Gigabit Ethernet Enhanced DPC\) on page 5388](#)  
[show interfaces queue \(Channelized OC12 IQE Type 3 PIC in SONET Mode\) on page 5391](#)  
[show interfaces queue \(QFX Series\) on page 5401](#)  
[show interfaces queue l2-statistics \(lsq interface\) on page 5402](#)

**Output Fields** [Table 171 on page 2209](#) lists the output fields for the **show interfaces queue** command. Output fields are listed in the approximate order in which they appear.

**Table 469: show interfaces queue Output Fields**

| Field Name                   | Field Description                                                                                                            |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Physical interface           | Name of the physical interface.                                                                                              |
| Enabled                      | State of the interface. Possible values are described in the "Enabled Field" section under Common Output Fields Description. |
| Interface index              | Physical interface's index number, which reflects its initialization sequence.                                               |
| SNMP ifIndex                 | SNMP index number for the interface.                                                                                         |
| Forwarding classes supported | Total number of forwarding classes supported on the specified interface.                                                     |
| Forwarding classes in use    | Total number of forwarding classes in use on the specified interface.                                                        |
| Ingress queues supported     | On Gigabit Ethernet IQ2 PICs only, total number of ingress queues supported on the specified interface.                      |
| Ingress queues in use        | On Gigabit Ethernet IQ2 PICs only, total number of ingress queues in use on the specified interface.                         |
| Output queues supported      | Total number of output queues supported on the specified interface.                                                          |
| Output queues in use         | Total number of output queues in use on the specified interface.                                                             |
| Egress queues supported      | Total number of egress queues supported on the specified interface.                                                          |
| Egress queues in use         | Total number of egress queues in use on the specified interface.                                                             |
| Queue                        | Queue number.                                                                                                                |



Table 469: show interfaces queue Output Fields (*continued*)

| Field Name                      | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Queue counters (Ingress)</b> | CoS queue number and its associated user-configured forwarding class name. Displayed on IQ2 interfaces. <ul style="list-style-type: none"> <li>• <b>Queued packets</b>—Number of queued packets.</li> <li>• <b>Transmitted packets</b>—Number of transmitted packets.</li> <li>• <b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>                                                                                                                                                                                                     |
| <b>Burst size</b>               | (Logical interfaces on IQ PICs only) Maximum number of bytes up to which the logical interface can burst. The burst size is based on the shaping rate applied to the interface.                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Forwarding classes</b>       | Forwarding class name.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Queued Packets</b>           | Number of packets queued to this queue.<br><br><b>NOTE:</b> For Gigabit Ethernet IQ2 interfaces, the Queued Packets count is calculated by the Junos OS interpreting one frame buffer as one packet. If the queued packets are very large or very small, the calculation might not be completely accurate for transit traffic. The count is completely accurate for traffic terminated on the router.                                                                                                                                                                         |
| <b>Queued Bytes</b>             | Number of bytes queued to this queue. The byte counts vary by PIC type. For more information, see <a href="#">Table 172 on page 2212</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Transmitted Packets</b>      | Number of packets transmitted by this queue. When fragmentation occurs on the egress interface, the first set of packet counters shows the postfragmentation values. The second set of packet counters (displayed under the <b>Packet Forwarding Engine Chassis Queues</b> field) shows the prefragmentation values.<br><br><b>NOTE:</b> For layer 2 statistics, see <a href="#">“Overhead for Layer 2 Statistics” on page 2205</a>                                                                                                                                           |
| <b>Transmitted Bytes</b>        | Number of bytes transmitted by this queue. The byte counts vary by PIC type. For more information, see <a href="#">Table 172 on page 2212</a> .<br><br><b>NOTE:</b> On MX Series routers, this number can be inaccurate when you issue the command for a physical interface repeatedly and in quick succession, because the statistics for the child nodes are collected infrequently. Wait ten seconds between successive iterations to avoid this situation.<br><br><b>NOTE:</b> For layer 2 statistics, see <a href="#">“Overhead for Layer 2 Statistics” on page 2205</a> |
| <b>Tail-dropped packets</b>     | Number of packets dropped because of tail drop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |



Table 469: show interfaces queue Output Fields (*continued*)

| Field Name          | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RED-dropped packets | <p>Number of packets dropped because of random early detection (RED).</p> <ul style="list-style-type: none"> <li>(M Series and T Series routers only) On M320 and M120 routers and the T Series routers, the total number of dropped packets is displayed. On all other M Series routers, the output classifies dropped packets into the following categories: <ul style="list-style-type: none"> <li><b>Low, non-TCP</b>—Number of low-loss priority non-TCP packets dropped because of RED.</li> <li><b>Low, TCP</b>—Number of low-loss priority TCP packets dropped because of RED.</li> <li><b>High, non-TCP</b>—Number of high-loss priority non-TCP packets dropped because of RED.</li> <li><b>High, TCP</b>—Number of high-loss priority TCP packets dropped because of RED.</li> </ul> </li> <li>(J Series routers and MX Series routers with enhanced DPCs, and T Series routers with enhanced FPCs only) The output classifies dropped packets into the following categories: <ul style="list-style-type: none"> <li><b>Low</b>—Number of low-loss priority packets dropped because of RED.</li> <li><b>Medium-low</b>—Number of medium-low loss priority packets dropped because of RED.</li> <li><b>Medium-high</b>—Number of medium-high loss priority packets dropped because of RED.</li> <li><b>High</b>—Number of high-loss priority packets dropped because of RED.</li> </ul> </li> </ul> |
| RED-dropped bytes   | <p>Number of bytes dropped because of RED. The byte counts vary by PIC type. For more information, see <a href="#">Table 172 on page 2212</a>.</p> <ul style="list-style-type: none"> <li>(M Series and T Series routers only) On M320 and M120 routers and the T Series routers, only the total number of dropped bytes is displayed. On all other M Series routers, the output classifies dropped bytes into the following categories: <ul style="list-style-type: none"> <li><b>Low, non-TCP</b>—Number of low-loss priority non-TCP bytes dropped because of RED.</li> <li><b>Low, TCP</b>—Number of low-loss priority TCP bytes dropped because of RED.</li> <li><b>High, non-TCP</b>—Number of high-loss priority non-TCP bytes dropped because of RED.</li> <li><b>High, TCP</b>—Number of high-loss priority TCP bytes dropped because of RED.</li> </ul> </li> <li>(J Series routers only) The output classifies dropped bytes into the following categories: <ul style="list-style-type: none"> <li><b>Low</b>—Number of low-loss priority bytes dropped because of RED.</li> <li><b>Medium-low</b>—Number of medium-low loss priority bytes dropped because of RED.</li> <li><b>Medium-high</b>—Number of medium-high loss priority bytes dropped because of RED.</li> <li><b>High</b>—Number of high-loss priority bytes dropped because of RED.</li> </ul> </li> </ul>                           |

Byte counts vary by PIC type. [Table 172 on page 2212](#) shows how the byte counts on the outbound interfaces vary depending on the PIC type. [Table 172 on page 2212](#) is based on the assumption that outbound interfaces are sending IP traffic with 478 bytes per packet.



Table 470: Byte Count by PIC Type

| PIC Type                         | Output Level                | Byte Count Includes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Comments                                                                                                                                                                                                     |
|----------------------------------|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gigabit Ethernet IQ and IQE PICs | Interface                   | <p>Queued: 490 bytes per packet, representing 478 bytes of Layer 3 packet + 12 bytes</p> <p>Transmitted: 490 bytes per packet, representing 478 bytes of Layer 3 packet + 12 bytes</p> <p>RED dropped: 496 bytes per packet representing 478 bytes of Layer 3 packet + 18 bytes</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <p>The 12 additional bytes include 6 bytes for the destination MAC address + 4 bytes for the VLAN + 2 bytes for the Ethernet type.</p> <p>For RED dropped, 6 bytes are added for the source MAC address.</p> |
|                                  | Packet forwarding component | <p>Queued: 478 bytes per packet, representing 478 bytes of Layer 3 packet</p> <p>Transmitted: 478 bytes per packet, representing 478 bytes of Layer 3 packet</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | —                                                                                                                                                                                                            |
| Non-IQ PIC                       | Interface                   | <p>T Series, TX Series, T1600, and MX Series routers:</p> <ul style="list-style-type: none"> <li>Queued: 478 bytes of Layer 3 packet.</li> <li>Transmitted: 478 bytes of Layer 3 packet.</li> </ul> <p>T4000 routers with Type 5 FPCs :</p> <ul style="list-style-type: none"> <li>Queued: 478 bytes of Layer 3 packet + the full Layer 2 overhead including 4 bytes CRC + the full Layer 1 overhead 8 bytes preamble + 12 bytes Inter frame Gap.</li> <li>Transmitted: 478 bytes of Layer 3 packet + the full Layer 2 overhead including 4 bytes CRC + the full Layer 1 overhead 8 bytes preamble + 12 bytes Interframe Gap.</li> </ul> <p>M Series routers:</p> <ul style="list-style-type: none"> <li>Queued: 478 bytes of Layer 3 packet.</li> <li>Transmitted: 478 bytes of Layer 3 packet + the full Layer 2 overhead.</li> </ul> <p>PTX Series Packet Transport Switches:</p> <ul style="list-style-type: none"> <li>Queued: 478 bytes of Layer 3 packet + the full Layer 2 overhead including 4 bytes FCS + the full Layer 1 overhead of the MAC header DA + SA + EtherType (non-VLAN).</li> <li>Transmitted: 478 bytes of Layer 3 packet + the full Layer 2 overhead including 4 bytes CRC + the full Layer 1 overhead of the MAC header DA + SA + EtherType (non-VLAN).</li> <li>RED dropped: 478 bytes of Layer 3 packet + 22 bytes special header. To the TQ, this packet has 4 bytes more than queued or transmitted.</li> </ul> | <p>The Layer 2 overhead is 14 bytes for non-VLAN traffic and 18 bytes for VLAN traffic.</p>                                                                                                                  |



Table 470: Byte Count by PIC Type (*continued*)

| PIC Type                                             | Output Level                | Byte Count Includes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Comments                                                                                                                           |
|------------------------------------------------------|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| IQ and IQE PICs with a SONET/SDH interface           | Interface                   | <p>Queued: 482 bytes per packet, representing 478 bytes of Layer 3 packet + 4 bytes</p> <p>Transmitted: 482 bytes per packet, representing 478 bytes of Layer 3 packet + 4 bytes</p> <p>RED dropped: 482 bytes per packet, representing 478 bytes of Layer 3 packet + 4 bytes</p>                                                                                                                                                                                                                       | The additional 4 bytes are for the Layer 2 Point-to-Point Protocol (PPP) header.                                                   |
|                                                      | Packet forwarding component | <p>Queued: 478 bytes per packet, representing 478 bytes of Layer 3 packet</p> <p>Transmitted: 486 bytes per packet, representing 478 bytes of Layer 3 packet + 8 bytes</p>                                                                                                                                                                                                                                                                                                                              | For transmitted packets, the additional 8 bytes includes 4 bytes for the PPP header and 4 bytes for a cookie.                      |
| Non-IQ PIC with a SONET/SDH interface                | Interface                   | <p>T Series, TX Series, T1600, and MX Series routers:</p> <ul style="list-style-type: none"> <li>Queued: 478 bytes of Layer 3 packet.</li> <li>Transmitted: 478 bytes of Layer 3 packet.</li> </ul> <p>M Series routers:</p> <ul style="list-style-type: none"> <li>Queued: 478 bytes of Layer 3 packet.</li> <li>Transmitted: 483 bytes per packet, representing 478 bytes of Layer 3 packet + 5 bytes</li> <li>RED dropped: 478 bytes per packet, representing 478 bytes of Layer 3 packet</li> </ul> | For transmitted packets, the additional 5 bytes includes 4 bytes for the PPP header and 1 byte for the packet loss priority (PLP). |
| Interfaces configured with Frame Relay Encapsulation | Interface                   | The default Frame Relay overhead is 7 bytes. If you configure the Frame Check Sequence (FCS) to 4 bytes, then the overhead increases to 10 bytes.                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                    |
| 1-port 10-Gigabit Ethernet IQ2 and IQ2-E PICs        | Interface                   | <p>Queued: 478 bytes of Layer 3 packet + the full Layer 2 overhead including CRC.</p> <p>Transmitted: 478 bytes of Layer 3 packet + the full Layer 2 overhead including CRC.</p>                                                                                                                                                                                                                                                                                                                        | The Layer 2 overhead is 18 bytes for non-VLAN traffic and 22 bytes for VLAN traffic.                                               |
| 4-port 1G IQ2 and IQ2-E PICs                         | Packet forwarding component | Queued: 478 bytes of Layer 3 packet.                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | —                                                                                                                                  |
| 8-port 1G IQ2 and IQ2-E PICs                         |                             | Transmitted: 478 bytes of Layer 3 packet.                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                    |



## Sample Output

### show interfaces queue (Aggregated Ethernet on a T320 Router)

The following example shows that the aggregated Ethernet interface, **ae1**, has traffic on queues **af1** and **af12**:

```

user@host> show interfaces queue ae1
Physical interface: ae1, Enabled, Physical link is Up
Interface index: 158, SNMP ifIndex: 33 Forwarding classes: 8 supported, 8 in use
Output queues: 8 supported, 8 in use
Queue: 0, Forwarding classes: be
  Queued:
    Packets      :           5           0 pps
    Bytes        :          242           0 bps
  Transmitted:
    Packets      :           5           0 pps
    Bytes        :          242           0 bps
    Tail-dropped packets :           0           0 pps
    RED-dropped packets :           0           0 pps
    RED-dropped bytes  :           0           0 bps
Queue: 1, Forwarding classes: af1
  Queued:
    Packets      :        42603765        595484 pps
    Bytes        :       5453281920       609776496 bps
  Transmitted:
    Packets      :        42603765        595484 pps
    Bytes        :       5453281920       609776496 bps
    Tail-dropped packets :           0           0 pps
    RED-dropped packets :           0           0 pps
    RED-dropped bytes  :           0           0 bps
Queue: 2, Forwarding classes: ef1
  Queued:
    Packets      :           0           0 pps
    Bytes        :           0           0 bps
  Transmitted:
    Packets      :           0           0 pps
    Bytes        :           0           0 bps
    Tail-dropped packets :           0           0 pps
    RED-dropped packets :           0           0 pps
    RED-dropped bytes  :           0           0 bps
Queue: 3, Forwarding classes: nc
  Queued:
    Packets      :           45           0 pps
    Bytes        :          3930           0 bps
  Transmitted:
    Packets      :           45           0 pps
    Bytes        :          3930           0 bps
    Tail-dropped packets :           0           0 pps
    RED-dropped packets :           0           0 pps
    RED-dropped bytes  :           0           0 bps
Queue: 4, Forwarding classes: af11
  Queued:
    Packets      :           0           0 pps
    Bytes        :           0           0 bps
  Transmitted:
    Packets      :           0           0 pps
    Bytes        :           0           0 bps
    Tail-dropped packets :           0           0 pps
    RED-dropped packets :           0           0 pps
    RED-dropped bytes  :           0           0 bps
Queue: 5, Forwarding classes: ef11

```



```

Queued:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
  Tail-dropped packets :          0          0 pps
  RED-dropped packets :          0          0 pps
  RED-dropped bytes  :          0          0 bps
Queue: 6, Forwarding classes: af12
Queued:
  Packets      :      31296413      437436 pps
  Bytes       :      4005940864      447935200 bps
Transmitted:
  Packets      :      31296413      437436 pps
  Bytes       :      4005940864      447935200 bps
  Tail-dropped packets :          0          0 pps
  RED-dropped packets :          0          0 pps
  RED-dropped bytes  :          0          0 bps
Queue: 7, Forwarding classes: nc2
Queued:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
Transmitted:
  Packets      :          0          0 pps
  Bytes       :          0          0 bps
  Tail-dropped packets :          0          0 pps
  RED-dropped packets :          0          0 pps
  RED-dropped bytes  :          0          0 bps

```

#### show interfaces queue (Fast Ethernet on a J4300 Router)

```

user@host> show interfaces queue fe-4/0/0.0
Logical interface fe-4/0/0.0 (Index 71) (SNMP ifIndex 42)
Forwarding classes: 8 supported, 8 in use
Output queues: 8 supported, 8 in use
Queue: 0, Forwarding classes: be
Queued:
  Packets      :      5240762      3404 pps
  Bytes       :      3020710354      15934544 bps
Transmitted:
  Packets      :      5240762      3404 pps
  Bytes       :      3020710354      15934544 bps
  Tail-dropped packets :          0          0 pps
  RED-dropped packets :          0          0 pps
  Low         :          0          0 pps
  Medium-low  :          0          0 pps
  Medium-high :          0          0 pps
  High        :          0          0 pps
  RED-dropped bytes  :          0          0 bps
  Low         :          0          0 pps
  Medium-low  :          0          0 pps
  Medium-high :          0          0 pps
  High        :          0          0 pps
Queue: 1, Forwarding classes: af1
Queued:
  Packets      :      2480391      1650 pps
  Bytes       :      1304685666      6945704 bps
Transmitted:
  Packets      :      2478740      1650 pps
  Bytes       :      1303817240      6945704 bps
  Tail-dropped packets :          0          0 pps
  RED-dropped packets :      1651          0 pps

```



|                   |   |        |       |
|-------------------|---|--------|-------|
| Low               | : | 0      | 0 pps |
| Medium-low        | : | 0      | 0 pps |
| Medium-high       | : | 0      | 0 pps |
| High              | : | 1651   | 0 pps |
| RED-dropped bytes | : | 868426 | 0 bps |
| Low               | : | 0      | 0 pps |
| Medium-low        | : | 0      | 0 pps |
| Medium-high       | : | 0      | 0 pps |
| High              | : | 868426 | 0 pps |

### show interfaces queue (Gigabit Ethernet on a T640 Router)

```

user@host> show interfaces queue
Physical interface: ge-7/0/1, Enabled, Physical link is Up
Interface index: 150, SNMP ifIndex: 42
Forwarding classes: 8 supported, 8 in use
Output queues: 8 supported, 8 in use
Queue: 0, Forwarding classes: be
  Queued:
    Packets      :      13      0 pps
    Bytes        :     622      0 bps
  Transmitted:
    Packets      :      13      0 pps
    Bytes        :     622      0 bps
    Tail-dropped packets :      0      0 pps
    RED-dropped packets :      0      0 pps
    RED-dropped bytes  :      0      0 bps
Queue: 1, Forwarding classes: af1
  Queued:
    Packets      : 1725947945 372178 pps
    Bytes        : 220921336960 381110432 bps
  Transmitted:
    Packets      : 1725947945 372178 pps
    Bytes        : 220921336960 381110432 bps
    Tail-dropped packets :      0      0 pps
    RED-dropped packets :      0      0 pps
    RED-dropped bytes  :      0      0 bps
Queue: 2, Forwarding classes: ef1
  Queued:
    Packets      :      0      0 pps
    Bytes        :      0      0 bps
  Transmitted:
    Packets      :      0      0 pps
    Bytes        :      0      0 bps
    Tail-dropped packets :      0      0 pps
    RED-dropped packets :      0      0 pps
    RED-dropped bytes  :      0      0 bps
Queue: 3, Forwarding classes: nc
  Queued:
    Packets      :      571      0 pps
    Bytes        :    49318     336 bps
  Transmitted:
    Packets      :      571      0 pps
    Bytes        :    49318     336 bps
    Tail-dropped packets :      0      0 pps
    RED-dropped packets :      0      0 pps
    RED-dropped bytes  :      0      0 bps

```

### show interfaces queue aggregate (Gigabit)

```

user@host> show interfaces queue ge-2/2/9 aggregate
Physical interface: ge-2/2/9, Enabled, Physical link is Up
Interface index: 238, SNMP ifIndex: 71

```



Ethernet Enhanced  
DPC)

```

Forwarding classes: 16 supported, 4 in use
Ingress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
    Packets      :      148450735      947295 pps
    Bytes        :      8016344944    409228848 bps
  Transmitted:
    Packets      :      76397439      487512 pps
    Bytes        :      4125461868    210602376 bps
  Tail-dropped packets : Not Available
  RED-dropped packets :      72053285      459783 pps
    Low          :      72053285      459783 pps
    Medium-low   :              0          0 pps
    Medium-high  :              0          0 pps
    High         :              0          0 pps
  RED-dropped bytes  :      3890877444    198626472 bps
    Low          :      3890877444    198626472 bps
    Medium-low   :              0          0 bps
    Medium-high  :              0          0 bps
    High         :              0          0 bps
Queue: 1, Forwarding classes: expedited-forwarding
  Queued:
    Packets      :              0          0 pps
    Bytes        :              0          0 bps
  Transmitted:
    Packets      :              0          0 pps
    Bytes        :              0          0 bps
  Tail-dropped packets : Not Available
  RED-dropped packets :              0          0 pps
    Low          :              0          0 pps
    Medium-low   :              0          0 pps
    Medium-high  :              0          0 pps
    High         :              0          0 pps
  RED-dropped bytes  :              0          0 bps
    Low          :              0          0 bps
    Medium-low   :              0          0 bps
    Medium-high  :              0          0 bps
    High         :              0          0 bps
Queue: 2, Forwarding classes: assured-forwarding
  Queued:
    Packets      :      410278257      473940 pps
    Bytes        :      22156199518    204742296 bps
  Transmitted:
    Packets      :      4850003        4033 pps
    Bytes        :      261900162    1742256 bps
  Tail-dropped packets : Not Available
  RED-dropped packets :      405425693      469907 pps
    Low          :      405425693      469907 pps
    Medium-low   :              0          0 pps
    Medium-high  :              0          0 pps
    High         :              0          0 pps
  RED-dropped bytes  :      21892988124    203000040 bps
    Low          :      21892988124    203000040 bps
    Medium-low   :              0          0 bps
    Medium-high  :              0          0 bps
    High         :              0          0 bps
Queue: 3, Forwarding classes: network-control
  Queued:
    Packets      :              0          0 pps
    Bytes        :              0          0 bps
  Transmitted:

```



```

Packets          :          0          0 pps
Bytes            :          0          0 bps
Tail-dropped packets : Not Available
RED-dropped packets :          0          0 pps
  Low            :          0          0 pps
  Medium-low     :          0          0 pps
  Medium-high    :          0          0 pps
  High           :          0          0 pps
RED-dropped bytes  :          0          0 bps
  Low            :          0          0 bps
  Medium-low     :          0          0 bps
  Medium-high    :          0          0 bps
  High           :          0          0 bps
Forwarding classes: 16 supported, 4 in use
Egress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
    Packets      :      76605230      485376 pps
    Bytes        :      5209211400    264044560 bps
  Transmitted:
    Packets      :      76444631      484336 pps
    Bytes        :      5198235612    263478800 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :      160475      1040 pps
      Low        :      160475      1040 pps
      Medium-low :          0          0 pps
      Medium-high:          0          0 pps
      High       :          0          0 pps
    RED-dropped bytes  :      10912300    565760 bps
      Low          :      10912300    565760 bps
      Medium-low   :          0          0 bps
      Medium-high  :          0          0 bps
      High        :          0          0 bps
Queue: 1, Forwarding classes: expedited-forwarding
  Queued:
    Packets      :          0          0 pps
    Bytes        :          0          0 bps
  Transmitted:
    Packets      :          0          0 pps
    Bytes        :          0          0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :          0          0 pps
      Low        :          0          0 pps
      Medium-low :          0          0 pps
      Medium-high:          0          0 pps
      High       :          0          0 pps
    RED-dropped bytes  :          0          0 bps
      Low        :          0          0 bps
      Medium-low :          0          0 bps
      Medium-high :          0          0 bps
      High       :          0          0 bps
Queue: 2, Forwarding classes: assured-forwarding
  Queued:
    Packets      :      4836136      3912 pps
    Bytes        :      333402032    2139056 bps
  Transmitted:
    Packets      :      3600866      1459 pps
    Bytes        :      244858888    793696 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :      1225034      2450 pps
      Low        :      1225034      2450 pps

```



```

Medium-low      : 0 0 pps
Medium-high     : 0 0 pps
High            : 0 0 pps
RED-dropped bytes : 83302312 1333072 bps
Low             : 83302312 1333072 bps
Medium-low      : 0 0 bps
Medium-high     : 0 0 bps
High            : 0 0 bps
Queue: 3, Forwarding classes: network-control
Queued:
Packets         : 0 0 pps
Bytes           : 0 0 bps
Transmitted:
Packets         : 0 0 pps
Bytes           : 0 0 bps
Tail-dropped packets : Not Available
RED-dropped packets : 0 0 pps
Low             : 0 0 pps
Medium-low      : 0 0 pps
Medium-high     : 0 0 pps
High            : 0 0 pps
RED-dropped bytes : 0 0 bps
Low             : 0 0 bps
Medium-low      : 0 0 bps
Medium-high     : 0 0 bps
High            : 0 0 bps

```

#### Packet Forwarding Engine Chassis Queues:

Queues: 4 supported, 4 in use

Queue: 0, Forwarding classes: best-effort

```

Queued:
Packets         : 77059796 486384 pps
Bytes           : 3544750624 178989576 bps
Transmitted:
Packets         : 77059797 486381 pps
Bytes           : 3544750670 178988248 bps
Tail-dropped packets : 0 0 pps
RED-dropped packets : 0 0 pps
Low             : 0 0 pps
Medium-low      : 0 0 pps
Medium-high     : 0 0 pps
High            : 0 0 pps
RED-dropped bytes : 0 0 bps
Low             : 0 0 bps
Medium-low      : 0 0 bps
Medium-high     : 0 0 bps
High            : 0 0 bps

```

Queue: 1, Forwarding classes: expedited-forwarding

```

Queued:
Packets         : 0 0 pps
Bytes           : 0 0 bps
Transmitted:
Packets         : 0 0 pps
Bytes           : 0 0 bps
Tail-dropped packets : 0 0 pps
RED-dropped packets : 0 0 pps
Low             : 0 0 pps
Medium-low      : 0 0 pps
Medium-high     : 0 0 pps
High            : 0 0 pps
RED-dropped bytes : 0 0 bps

```



```

        Low                :                0                0 bps
        Medium-low         :                0                0 bps
        Medium-high        :                0                0 bps
        High               :                0                0 bps
Queue: 2, Forwarding classes: assured-forwarding
Queued:
  Packets                 :            4846580            3934 pps
  Bytes                   :            222942680          1447768 bps
Transmitted:
  Packets                 :            4846580            3934 pps
  Bytes                   :            222942680          1447768 bps
  Tail-dropped packets :                0                0 pps
  RED-dropped packets   :                0                0 pps
    Low                 :                0                0 pps
    Medium-low          :                0                0 pps
    Medium-high         :                0                0 pps
    High                :                0                0 pps
  RED-dropped bytes     :                0                0 bps
    Low                 :                0                0 bps
    Medium-low          :                0                0 bps
    Medium-high         :                0                0 bps
    High                :                0                0 bps
Queue: 3, Forwarding classes: network-control
Queued:
  Packets                 :                0                0 pps
  Bytes                   :                0                0 bps
Transmitted:
  Packets                 :                0                0 pps
  Bytes                   :                0                0 bps
  Tail-dropped packets :                0                0 pps
  RED-dropped packets   :                0                0 pps
    Low                 :                0                0 pps
    Medium-low          :                0                0 pps
    Medium-high         :                0                0 pps
    High                :                0                0 pps
  RED-dropped bytes     :                0                0 bps
    Low                 :                0                0 bps
    Medium-low          :                0                0 bps
    Medium-high         :                0                0 bps
    High                :                0                0 bps

```

### show interfaces queue (Gigabit Ethernet IQ2 PIC)

```

user@host> show interfaces queue ge-7/1/3
Physical interface: ge-7/1/3, Enabled, Physical link is Up
Interface index: 170, SNMP ifIndex: 70 Forwarding classes: 16 supported, 4 in
use Ingress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
Queued:
  Packets                 :            418390039            10 pps
  Bytes                   :            38910269752          7440 bps
Transmitted:
  Packets                 :            418390039            10 pps
  Bytes                   :            38910269752          7440 bps
  Tail-dropped packets : Not Available
  RED-dropped packets   :                0                0 pps
  RED-dropped bytes     :                0                0 bps
Queue: 1, Forwarding classes: expedited-forwarding
Queued:
  Packets                 :                0                0 pps
  Bytes                   :                0                0 bps
Transmitted:
  Packets                 :                0                0 pps

```



```

Bytes : 0 0 bps
Tail-dropped packets : Not Available
RED-dropped packets : 0 0 pps
RED-dropped bytes : 0 0 bps
Queue: 2, Forwarding classes: assured-forwarding
Queued:
Packets : 0 0 pps
Bytes : 0 0 bps
Transmitted:
Packets : 0 0 pps
Bytes : 0 0 bps
Tail-dropped packets : Not Available
RED-dropped packets : 0 0 pps
RED-dropped bytes : 0 0 bps
Queue: 3, Forwarding classes: network-control
Queued:
Packets : 7055 1 pps
Bytes : 451552 512 bps
Transmitted:
Packets : 7055 1 pps
Bytes : 451552 512 bps
Tail-dropped packets : Not Available
RED-dropped packets : 0 0 pps
RED-dropped bytes : 0 0 bps
Forwarding classes: 16 supported, 4 in use Egress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
Queued:
Packets : 1031 0 pps
Bytes : 143292 0 bps
Transmitted:
Packets : 1031 0 pps
Bytes : 143292 0 bps
Tail-dropped packets : Not Available
RL-dropped packets : 0 0 pps
RL-dropped bytes : 0 0 bps
RED-dropped packets : 0 0 pps
RED-dropped bytes : 0 0 bps
Queue: 1, Forwarding classes: expedited-forwarding
Queued:
Packets : 0 0 pps
Bytes : 0 0 bps
Transmitted:
Packets : 0 0 pps
Bytes : 0 0 bps
Tail-dropped packets : Not Available
RL-dropped packets : 0 0 pps
RL-dropped bytes : 0 0 bps
RED-dropped packets : 0 0 pps
RED-dropped bytes : 0 0 bps
Queue: 2, Forwarding classes: assured-forwarding
Queued:
Packets : 0 0 pps
Bytes : 0 0 bps
Transmitted:
Packets : 0 0 pps
Bytes : 0 0 bps
Tail-dropped packets : Not Available
RL-dropped packets : 0 0 pps
RL-dropped bytes : 0 0 bps
RED-dropped packets : 0 0 pps
RED-dropped bytes : 0 0 bps

```



## Queue: 3, Forwarding classes: network-control

## Queued:

|         |   |         |          |
|---------|---|---------|----------|
| Packets | : | 77009   | 11 pps   |
| Bytes   | : | 6894286 | 7888 bps |

## Transmitted:

|         |   |         |          |
|---------|---|---------|----------|
| Packets | : | 77009   | 11 pps   |
| Bytes   | : | 6894286 | 7888 bps |

Tail-dropped packets : Not Available

|                    |   |   |       |
|--------------------|---|---|-------|
| RL-dropped packets | : | 0 | 0 pps |
|--------------------|---|---|-------|

|                  |   |   |       |
|------------------|---|---|-------|
| RL-dropped bytes | : | 0 | 0 bps |
|------------------|---|---|-------|

|                     |   |   |       |
|---------------------|---|---|-------|
| RED-dropped packets | : | 0 | 0 pps |
|---------------------|---|---|-------|

|                   |   |   |       |
|-------------------|---|---|-------|
| RED-dropped bytes | : | 0 | 0 bps |
|-------------------|---|---|-------|

## Packet Forwarding Engine Chassis Queues:

Queues: 4 supported, 4 in use

## Queue: 0, Forwarding classes: best-effort

## Queued:

|         |   |        |       |
|---------|---|--------|-------|
| Packets | : | 1031   | 0 pps |
| Bytes   | : | 147328 | 0 bps |

## Transmitted:

|         |   |        |       |
|---------|---|--------|-------|
| Packets | : | 1031   | 0 pps |
| Bytes   | : | 147328 | 0 bps |

Tail-dropped packets : 0 0 pps

RED-dropped packets : 0 0 pps

|              |   |   |       |
|--------------|---|---|-------|
| Low, non-TCP | : | 0 | 0 pps |
|--------------|---|---|-------|

|          |   |   |       |
|----------|---|---|-------|
| Low, TCP | : | 0 | 0 pps |
|----------|---|---|-------|

|               |   |   |       |
|---------------|---|---|-------|
| High, non-TCP | : | 0 | 0 pps |
|---------------|---|---|-------|

|           |   |   |       |
|-----------|---|---|-------|
| High, TCP | : | 0 | 0 pps |
|-----------|---|---|-------|

RED-dropped bytes : 0 0 bps

|              |   |   |       |
|--------------|---|---|-------|
| Low, non-TCP | : | 0 | 0 bps |
|--------------|---|---|-------|

|          |   |   |       |
|----------|---|---|-------|
| Low, TCP | : | 0 | 0 bps |
|----------|---|---|-------|

|               |   |   |       |
|---------------|---|---|-------|
| High, non-TCP | : | 0 | 0 bps |
|---------------|---|---|-------|

|           |   |   |       |
|-----------|---|---|-------|
| High, TCP | : | 0 | 0 bps |
|-----------|---|---|-------|

## Queue: 1, Forwarding classes: expedited-forwarding

## Queued:

|         |   |   |       |
|---------|---|---|-------|
| Packets | : | 0 | 0 pps |
| Bytes   | : | 0 | 0 bps |

## Transmitted:

|         |   |   |       |
|---------|---|---|-------|
| Packets | : | 0 | 0 pps |
| Bytes   | : | 0 | 0 bps |

Tail-dropped packets : 0 0 pps

RED-dropped packets : 0 0 pps

|              |   |   |       |
|--------------|---|---|-------|
| Low, non-TCP | : | 0 | 0 pps |
|--------------|---|---|-------|

|          |   |   |       |
|----------|---|---|-------|
| Low, TCP | : | 0 | 0 pps |
|----------|---|---|-------|

|               |   |   |       |
|---------------|---|---|-------|
| High, non-TCP | : | 0 | 0 pps |
|---------------|---|---|-------|

|           |   |   |       |
|-----------|---|---|-------|
| High, TCP | : | 0 | 0 pps |
|-----------|---|---|-------|

RED-dropped bytes : 0 0 bps

|              |   |   |       |
|--------------|---|---|-------|
| Low, non-TCP | : | 0 | 0 bps |
|--------------|---|---|-------|

|          |   |   |       |
|----------|---|---|-------|
| Low, TCP | : | 0 | 0 bps |
|----------|---|---|-------|

|               |   |   |       |
|---------------|---|---|-------|
| High, non-TCP | : | 0 | 0 bps |
|---------------|---|---|-------|

|           |   |   |       |
|-----------|---|---|-------|
| High, TCP | : | 0 | 0 bps |
|-----------|---|---|-------|

## Queue: 2, Forwarding classes: assured-forwarding

## Queued:

|         |   |   |       |
|---------|---|---|-------|
| Packets | : | 0 | 0 pps |
| Bytes   | : | 0 | 0 bps |

## Transmitted:

|         |   |   |       |
|---------|---|---|-------|
| Packets | : | 0 | 0 pps |
| Bytes   | : | 0 | 0 bps |

Tail-dropped packets : 0 0 pps

RED-dropped packets : 0 0 pps

|              |   |   |       |
|--------------|---|---|-------|
| Low, non-TCP | : | 0 | 0 pps |
|--------------|---|---|-------|



```

      Low, TCP           :           0           0 pps
      High, non-TCP      :           0           0 pps
      High, TCP          :           0           0 pps
      RED-dropped bytes  :           0           0 bps
      Low, non-TCP       :           0           0 bps
      Low, TCP           :           0           0 bps
      High, non-TCP      :           0           0 bps
      High, TCP          :           0           0 bps
Queue: 3, Forwarding classes: network-control
Queued:
  Packets               :           94386           12 pps
  Bytes                 :          13756799          9568 bps
Transmitted:
  Packets               :           94386           12 pps
  Bytes                 :          13756799          9568 bps
  Tail-dropped packets :           0           0 pps
  RED-dropped packets  :           0           0 pps
  Low, non-TCP         :           0           0 pps
  Low, TCP             :           0           0 pps
  High, non-TCP        :           0           0 pps
  High, TCP            :           0           0 pps
  RED-dropped bytes    :           0           0 bps
  Low, non-TCP         :           0           0 bps
  Low, TCP             :           0           0 bps
  High, non-TCP        :           0           0 bps
  High, TCP            :           0           0 bps

```

`show interfaces queue`  
`both-ingress-egress`

```

user@host> show interfaces queue ge-6/2/0 both-ingress-egress
Physical interface: ge-6/2/0, Enabled, Physical link is Up
Interface index: 175, SNMP ifIndex: 121

```



**(Gigabit Ethernet IQ2  
PIC)**

```

Forwarding classes: 8 supported, 4 in use
Ingress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                254              0 pps
    Bytes        :            16274              0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0              0 pps
    RED-dropped bytes  :                0              0 bps
Queue: 1, Forwarding classes: expedited-forwarding
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0              0 pps
    Bytes        :                0              0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0              0 pps
    RED-dropped bytes  :                0              0 bps
Queue: 2, Forwarding classes: assured-forwarding
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0              0 pps
    Bytes        :                0              0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0              0 pps
    RED-dropped bytes  :                0              0 bps
Queue: 3, Forwarding classes: network-control
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0              0 pps
    Bytes        :                0              0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0              0 pps
    RED-dropped bytes  :                0              0 bps
Forwarding classes: 8 supported, 4 in use
Egress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                3              0 pps
    Bytes        :            126              0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0              0 pps
    RED-dropped bytes  :                0              0 bps
Queue: 1, Forwarding classes: expedited-forwarding
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0              0 pps
    Bytes        :                0              0 bps

```



```

Tail-dropped packets : Not Available
RED-dropped packets  : 0 0 pps
RED-dropped bytes    : 0 0 bps
Queue: 2, Forwarding classes: assured-forwarding
Queued:
  Packets      : Not Available
  Bytes        : 0 0 bps
Transmitted:
  Packets      : 0 0 pps
  Bytes        : 0 0 bps
Tail-dropped packets : Not Available
RED-dropped packets  : 0 0 pps
RED-dropped bytes    : 0 0 bps
Queue: 3, Forwarding classes: network-control
Queued:
  Packets      : Not Available
  Bytes        : 0 0 bps
Transmitted:
  Packets      : 0 0 pps
  Bytes        : 0 0 bps
Tail-dropped packets : Not Available
RED-dropped packets  : 0 0 pps
RED-dropped bytes    : 0 0 bps
Packet Forwarding Engine Chassis Queues:
Queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
Queued:
  Packets      : 80564692 0 pps
  Bytes        : 3383717100 0 bps
Transmitted:
  Packets      : 80564692 0 pps
  Bytes        : 3383717100 0 bps
Tail-dropped packets : 0 0 pps
RED-dropped packets  : 0 0 pps
RED-dropped bytes    : 0 0 bps
Queue: 1, Forwarding classes: expedited-forwarding
Queued:
  Packets      : 80564685 0 pps
  Bytes        : 3383716770 0 bps
Transmitted:
  Packets      : 80564685 0 pps
  Bytes        : 3383716770 0 bps
Tail-dropped packets : 0 0 pps
RED-dropped packets  : 0 0 pps
RED-dropped bytes    : 0 0 bps
Queue: 2, Forwarding classes: assured-forwarding
Queued:
  Packets      : 0 0 pps
  Bytes        : 0 0 bps
Transmitted:
  Packets      : 0 0 pps
  Bytes        : 0 0 bps
Tail-dropped packets : 0 0 pps
RED-dropped packets  : 0 0 pps
RED-dropped bytes    : 0 0 bps
Queue: 3, Forwarding classes: network-control
Queued:
  Packets      : 9397 0 pps
  Bytes        : 3809052 232 bps
Transmitted:
  Packets      : 9397 0 pps

```



|                      |   |         |         |
|----------------------|---|---------|---------|
| Bytes                | : | 3809052 | 232 bps |
| Tail-dropped packets | : | 0       | 0 pps   |
| RED-dropped packets  | : | 0       | 0 pps   |
| RED-dropped bytes    | : | 0       | 0 bps   |

#### show interfaces queue ingress (Gigabit Ethernet IQ2 PIC)

```

user@host> show interfaces queue ge-6/2/0 ingress
Physical interface: ge-6/2/0, Enabled, Physical link is Up
  Interface index: 175, SNMP ifIndex: 121
  Forwarding classes: 8 supported, 4 in use
  Ingress queues: 4 supported, 4 in use
  Queue: 0, Forwarding classes: best-effort
    Queued:
      Packets      : Not Available
      Bytes        :                0                0 bps
    Transmitted:
      Packets      :                288                0 pps
      Bytes        :            18450                0 bps
      Tail-dropped packets : Not Available
      RED-dropped packets :                0                0 pps
      RED-dropped bytes  :                0                0 bps
  Queue: 1, Forwarding classes: expedited-forwarding
    Queued:
      Packets      : Not Available
      Bytes        :                0                0 bps
    Transmitted:
      Packets      :                0                0 pps
      Bytes        :                0                0 bps
      Tail-dropped packets : Not Available
      RED-dropped packets :                0                0 pps
      RED-dropped bytes  :                0                0 bps
  Queue: 2, Forwarding classes: assured-forwarding
    Queued:
      Packets      : Not Available
      Bytes        :                0                0 bps
    Transmitted:
      Packets      :                0                0 pps
      Bytes        :                0                0 bps
      Tail-dropped packets : Not Available
      RED-dropped packets :                0                0 pps
      RED-dropped bytes  :                0                0 bps
  Queue: 3, Forwarding classes: network-control
    Queued:
      Packets      : Not Available
      Bytes        :                0                0 bps
    Transmitted:
      Packets      :                0                0 pps
      Bytes        :                0                0 bps
      Tail-dropped packets : Not Available
      RED-dropped packets :                0                0 pps
      RED-dropped bytes  :                0                0 bps

```

#### show interfaces queue egress

```

user@host> show interfaces queue ge-6/2/0 egress
Physical interface: ge-6/2/0, Enabled, Physical link is Up
  Interface index: 175, SNMP ifIndex: 121

```



(Gigabit Ethernet IQ2  
PIC)

```

Forwarding classes: 8 supported, 4 in use
Egress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                3                0 pps
    Bytes        :               126                0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0                0 pps
    RED-dropped bytes  :                0                0 bps
Queue: 1, Forwarding classes: expedited-forwarding
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0                0 pps
    RED-dropped bytes  :                0                0 bps
Queue: 2, Forwarding classes: assured-forwarding
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0                0 pps
    RED-dropped bytes  :                0                0 bps
Queue: 3, Forwarding classes: network-control
  Queued:
    Packets      : Not Available
    Bytes        :                0                0 bps
  Transmitted:
    Packets      :                0                0 pps
    Bytes        :                0                0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :                0                0 pps
    RED-dropped bytes  :                0                0 bps
Packet Forwarding Engine Chassis Queues:
Queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
    Packets      :                80564692            0 pps
    Bytes        :               3383717100            0 bps
  Transmitted:
    Packets      :                80564692            0 pps
    Bytes        :               3383717100            0 bps
    Tail-dropped packets :                0            0 pps
    RED-dropped packets :                0            0 pps
    RED-dropped bytes  :                0            0 bps
Queue: 1, Forwarding classes: expedited-forwarding
  Queued:
    Packets      :                80564685            0 pps
    Bytes        :               3383716770            0 bps
  Transmitted:
    Packets      :                80564685            0 pps
    Bytes        :               3383716770            0 bps

```



```
Tail-dropped packets :          0          0 pps
RED-dropped packets  :          0          0 pps
RED-dropped bytes   :          0          0 bps
Queue: 2, Forwarding classes: assured-forwarding
Queued:
  Packets           :          0          0 pps
  Bytes             :          0          0 bps
Transmitted:
  Packets           :          0          0 pps
  Bytes             :          0          0 bps
  Tail-dropped packets :          0          0 pps
  RED-dropped packets :          0          0 pps
  RED-dropped bytes   :          0          0 bps
Queue: 3, Forwarding classes: network-control
Queued:
  Packets           :          9538          0 pps
  Bytes             :        3819840          0 bps
Transmitted:
  Packets           :          9538          0 pps
  Bytes             :        3819840          0 bps
  Tail-dropped packets :          0          0 pps
  RED-dropped packets :          0          0 pps
  RED-dropped bytes   :          0          0 bps
```

**show interfaces queue  
remaining-traffic**

```
user@host> show interfaces queue ge-2/2/9 remaining-traffic
Physical interface: ge-2/2/9, Enabled, Physical link is Up
Interface index: 238, SNMP ifIndex: 71
```



(Gigabit Ethernet  
Enhanced DPC)

```

Forwarding classes: 16 supported, 4 in use
Ingress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
    Packets      :      110208969      472875 pps
    Bytes        :      5951284434    204282000 bps
  Transmitted:
    Packets      :      110208969      472875 pps
    Bytes        :      5951284434    204282000 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :      0      0 pps
      Low          :      0      0 pps
      Medium-low   :      0      0 pps
      Medium-high  :      0      0 pps
      High         :      0      0 pps
    RED-dropped bytes  :      0      0 bps
      Low          :      0      0 bps
      Medium-low   :      0      0 bps
      Medium-high  :      0      0 bps
      High         :      0      0 bps
Queue: 1, Forwarding classes: expedited-forwarding
  Queued:
    Packets      :      0      0 pps
    Bytes        :      0      0 bps
  Transmitted:
    Packets      :      0      0 pps
    Bytes        :      0      0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :      0      0 pps
      Low          :      0      0 pps
      Medium-low   :      0      0 pps
      Medium-high  :      0      0 pps
      High         :      0      0 pps
    RED-dropped bytes  :      0      0 bps
      Low          :      0      0 bps
      Medium-low   :      0      0 bps
      Medium-high  :      0      0 bps
      High         :      0      0 bps
Queue: 2, Forwarding classes: assured-forwarding
  Queued:
    Packets      :      0      0 pps
    Bytes        :      0      0 bps
  Transmitted:
    Packets      :      0      0 pps
    Bytes        :      0      0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :      0      0 pps
      Low          :      0      0 pps
      Medium-low   :      0      0 pps
      Medium-high  :      0      0 pps
      High         :      0      0 pps
    RED-dropped bytes  :      0      0 bps
      Low          :      0      0 bps
      Medium-low   :      0      0 bps
      Medium-high  :      0      0 bps
      High         :      0      0 bps
Queue: 3, Forwarding classes: network-control
  Queued:
    Packets      :      0      0 pps
    Bytes        :      0      0 bps
  Transmitted:

```



```

Packets          :          0          0 pps
Bytes            :          0          0 bps
Tail-dropped packets : Not Available
RED-dropped packets :          0          0 pps
  Low            :          0          0 pps
  Medium-low     :          0          0 pps
  Medium-high    :          0          0 pps
  High           :          0          0 pps
RED-dropped bytes  :          0          0 bps
  Low            :          0          0 bps
  Medium-low     :          0          0 bps
  Medium-high    :          0          0 bps
  High           :          0          0 bps
Forwarding classes: 16 supported, 4 in use
Egress queues: 4 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
    Packets      :      109355853      471736 pps
    Bytes        :      7436199152     256627968 bps
  Transmitted:
    Packets      :      109355852      471736 pps
    Bytes        :      7436198640     256627968 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :          0          0 pps
      Low        :          0          0 pps
      Medium-low :          0          0 pps
      Medium-high :          0          0 pps
      High       :          0          0 pps
    RED-dropped bytes  :          0          0 bps
      Low        :          0          0 bps
      Medium-low :          0          0 bps
      Medium-high :          0          0 bps
      High       :          0          0 bps
Queue: 1, Forwarding classes: expedited-forwarding
  Queued:
    Packets      :          0          0 pps
    Bytes        :          0          0 bps
  Transmitted:
    Packets      :          0          0 pps
    Bytes        :          0          0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :          0          0 pps
      Low        :          0          0 pps
      Medium-low :          0          0 pps
      Medium-high :          0          0 pps
      High       :          0          0 pps
    RED-dropped bytes  :          0          0 bps
      Low        :          0          0 bps
      Medium-low :          0          0 bps
      Medium-high :          0          0 bps
      High       :          0          0 bps
Queue: 2, Forwarding classes: assured-forwarding
  Queued:
    Packets      :          0          0 pps
    Bytes        :          0          0 bps
  Transmitted:
    Packets      :          0          0 pps
    Bytes        :          0          0 bps
    Tail-dropped packets : Not Available
    RED-dropped packets :          0          0 pps
      Low        :          0          0 pps

```



```

Medium-low      : 0 0 pps
Medium-high     : 0 0 pps
High            : 0 0 pps
RED-dropped bytes : 0 0 bps
Low             : 0 0 bps
Medium-low      : 0 0 bps
Medium-high     : 0 0 bps
High            : 0 0 bps
Queue: 3, Forwarding classes: network-control
Queued:
Packets         : 0 0 pps
Bytes           : 0 0 bps
Transmitted:
Packets         : 0 0 pps
Bytes           : 0 0 bps
Tail-dropped packets : Not Available
RED-dropped packets : 0 0 pps
Low             : 0 0 pps
Medium-low      : 0 0 pps
Medium-high     : 0 0 pps
High            : 0 0 pps
RED-dropped bytes : 0 0 bps
Low             : 0 0 bps
Medium-low      : 0 0 bps
Medium-high     : 0 0 bps
High            : 0 0 bps

```

`show interfaces queue`  
 (Channelized OC12 IQE

```

user@host> show interfaces queue t3-1/1/0:7
Physical interface: t3-1/1/0:7, Enabled, Physical link is Up

```



**Type 3 PIC in SONET Mode)**

Interface index: 192, SNMP ifIndex: 1948

Description: full T3 interface connect to 6ce13 t3-3/1/0:7 for FR testing - Lam

Forwarding classes: 16 supported, 9 in use

Egress queues: 8 supported, 8 in use

Queue: 0, Forwarding classes: DEFAULT

## Queued:

|         |   |        |           |
|---------|---|--------|-----------|
| Packets | : | 214886 | 13449 pps |
|---------|---|--------|-----------|

|       |   |         |             |
|-------|---|---------|-------------|
| Bytes | : | 9884756 | 5164536 bps |
|-------|---|---------|-------------|

## Transmitted:

|         |   |        |           |
|---------|---|--------|-----------|
| Packets | : | 214886 | 13449 pps |
|---------|---|--------|-----------|

|       |   |         |             |
|-------|---|---------|-------------|
| Bytes | : | 9884756 | 5164536 bps |
|-------|---|---------|-------------|

|                      |   |   |       |
|----------------------|---|---|-------|
| Tail-dropped packets | : | 0 | 0 pps |
|----------------------|---|---|-------|

|                     |   |   |       |
|---------------------|---|---|-------|
| RED-dropped packets | : | 0 | 0 pps |
|---------------------|---|---|-------|

|     |   |   |       |
|-----|---|---|-------|
| Low | : | 0 | 0 pps |
|-----|---|---|-------|

|            |   |   |       |
|------------|---|---|-------|
| Medium-low | : | 0 | 0 pps |
|------------|---|---|-------|

|             |   |   |       |
|-------------|---|---|-------|
| Medium-high | : | 0 | 0 pps |
|-------------|---|---|-------|

|      |   |   |       |
|------|---|---|-------|
| High | : | 0 | 0 pps |
|------|---|---|-------|

|                   |   |   |       |
|-------------------|---|---|-------|
| RED-dropped bytes | : | 0 | 0 bps |
|-------------------|---|---|-------|

|     |   |   |       |
|-----|---|---|-------|
| Low | : | 0 | 0 bps |
|-----|---|---|-------|

|            |   |   |       |
|------------|---|---|-------|
| Medium-low | : | 0 | 0 bps |
|------------|---|---|-------|

|             |   |   |       |
|-------------|---|---|-------|
| Medium-high | : | 0 | 0 bps |
|-------------|---|---|-------|

|      |   |   |       |
|------|---|---|-------|
| High | : | 0 | 0 bps |
|------|---|---|-------|

Queue: 1, Forwarding classes: REALTIME

## Queued:

|         |   |   |       |
|---------|---|---|-------|
| Packets | : | 0 | 0 pps |
|---------|---|---|-------|

|       |   |   |       |
|-------|---|---|-------|
| Bytes | : | 0 | 0 bps |
|-------|---|---|-------|

## Transmitted:

|         |   |   |       |
|---------|---|---|-------|
| Packets | : | 0 | 0 pps |
|---------|---|---|-------|

|       |   |   |       |
|-------|---|---|-------|
| Bytes | : | 0 | 0 bps |
|-------|---|---|-------|

|                      |   |   |       |
|----------------------|---|---|-------|
| Tail-dropped packets | : | 0 | 0 pps |
|----------------------|---|---|-------|



|                     |   |   |       |
|---------------------|---|---|-------|
| RED-dropped packets | : | 0 | 0 pps |
| Low                 | : | 0 | 0 pps |
| Medium-low          | : | 0 | 0 pps |
| Medium-high         | : | 0 | 0 pps |
| High                | : | 0 | 0 pps |
| RED-dropped bytes   | : | 0 | 0 bps |
| Low                 | : | 0 | 0 bps |
| Medium-low          | : | 0 | 0 bps |
| Medium-high         | : | 0 | 0 bps |
| High                | : | 0 | 0 bps |

Queue: 2, Forwarding classes: PRIVATE

Queued:

|         |   |   |       |
|---------|---|---|-------|
| Packets | : | 0 | 0 pps |
| Bytes   | : | 0 | 0 bps |

Transmitted:

|                      |   |   |       |
|----------------------|---|---|-------|
| Packets              | : | 0 | 0 pps |
| Bytes                | : | 0 | 0 bps |
| Tail-dropped packets | : | 0 | 0 pps |
| RED-dropped packets  | : | 0 | 0 pps |
| Low                  | : | 0 | 0 pps |
| Medium-low           | : | 0 | 0 pps |
| Medium-high          | : | 0 | 0 pps |
| High                 | : | 0 | 0 pps |
| RED-dropped bytes    | : | 0 | 0 bps |
| Low                  | : | 0 | 0 bps |
| Medium-low           | : | 0 | 0 bps |
| Medium-high          | : | 0 | 0 bps |
| High                 | : | 0 | 0 bps |

Queue: 3, Forwarding classes: CONTROL

Queued:

|         |   |    |       |
|---------|---|----|-------|
| Packets | : | 60 | 0 pps |
|---------|---|----|-------|



|                                              |   |      |       |
|----------------------------------------------|---|------|-------|
| Bytes                                        | : | 4560 | 0 bps |
| Transmitted:                                 |   |      |       |
| Packets                                      | : | 60   | 0 pps |
| Bytes                                        | : | 4560 | 0 bps |
| Tail-dropped packets                         | : | 0    | 0 pps |
| RED-dropped packets                          | : | 0    | 0 pps |
| Low                                          | : | 0    | 0 pps |
| Medium-low                                   | : | 0    | 0 pps |
| Medium-high                                  | : | 0    | 0 pps |
| High                                         | : | 0    | 0 pps |
| RED-dropped bytes                            | : | 0    | 0 bps |
| Low                                          | : | 0    | 0 bps |
| Medium-low                                   | : | 0    | 0 bps |
| Medium-high                                  | : | 0    | 0 bps |
| High                                         | : | 0    | 0 bps |
| Queue: 4, Forwarding classes: CLASS_B_OUTPUT |   |      |       |
| Queued:                                      |   |      |       |
| Packets                                      | : | 0    | 0 pps |
| Bytes                                        | : | 0    | 0 bps |
| Transmitted:                                 |   |      |       |
| Packets                                      | : | 0    | 0 pps |
| Bytes                                        | : | 0    | 0 bps |
| Tail-dropped packets                         | : | 0    | 0 pps |
| RED-dropped packets                          | : | 0    | 0 pps |
| Low                                          | : | 0    | 0 pps |
| Medium-low                                   | : | 0    | 0 pps |
| Medium-high                                  | : | 0    | 0 pps |
| High                                         | : | 0    | 0 pps |
| RED-dropped bytes                            | : | 0    | 0 bps |
| Low                                          | : | 0    | 0 bps |



|             |   |   |       |
|-------------|---|---|-------|
| Medium-low  | : | 0 | 0 bps |
| Medium-high | : | 0 | 0 bps |
| High        | : | 0 | 0 bps |

Queue: 5, Forwarding classes: CLASS\_C\_OUTPUT

Queued:

|         |   |   |       |
|---------|---|---|-------|
| Packets | : | 0 | 0 pps |
| Bytes   | : | 0 | 0 bps |

Transmitted:

|                      |   |   |       |
|----------------------|---|---|-------|
| Packets              | : | 0 | 0 pps |
| Bytes                | : | 0 | 0 bps |
| Tail-dropped packets | : | 0 | 0 pps |
| RED-dropped packets  | : | 0 | 0 pps |
| Low                  | : | 0 | 0 pps |
| Medium-low           | : | 0 | 0 pps |
| Medium-high          | : | 0 | 0 pps |
| High                 | : | 0 | 0 pps |
| RED-dropped bytes    | : | 0 | 0 bps |
| Low                  | : | 0 | 0 bps |
| Medium-low           | : | 0 | 0 bps |
| Medium-high          | : | 0 | 0 bps |
| High                 | : | 0 | 0 bps |

Queue: 6, Forwarding classes: CLASS\_V\_OUTPUT

Queued:

|         |   |   |       |
|---------|---|---|-------|
| Packets | : | 0 | 0 pps |
| Bytes   | : | 0 | 0 bps |

Transmitted:

|                      |   |   |       |
|----------------------|---|---|-------|
| Packets              | : | 0 | 0 pps |
| Bytes                | : | 0 | 0 bps |
| Tail-dropped packets | : | 0 | 0 pps |
| RED-dropped packets  | : | 0 | 0 pps |
| Low                  | : | 0 | 0 pps |



|                   |   |   |       |
|-------------------|---|---|-------|
| Medium-low        | : | 0 | 0 pps |
| Medium-high       | : | 0 | 0 pps |
| High              | : | 0 | 0 pps |
| RED-dropped bytes | : | 0 | 0 bps |
| Low               | : | 0 | 0 bps |
| Medium-low        | : | 0 | 0 bps |
| Medium-high       | : | 0 | 0 bps |
| High              | : | 0 | 0 bps |

Queue: 7, Forwarding classes: CLASS\_S\_OUTPUT, GETS

Queued:

|         |   |   |       |
|---------|---|---|-------|
| Packets | : | 0 | 0 pps |
| Bytes   | : | 0 | 0 bps |

Transmitted:

|                      |   |   |       |
|----------------------|---|---|-------|
| Packets              | : | 0 | 0 pps |
| Bytes                | : | 0 | 0 bps |
| Tail-dropped packets | : | 0 | 0 pps |
| RED-dropped packets  | : | 0 | 0 pps |
| Low                  | : | 0 | 0 pps |
| Medium-low           | : | 0 | 0 pps |
| Medium-high          | : | 0 | 0 pps |
| High                 | : | 0 | 0 pps |
| RED-dropped bytes    | : | 0 | 0 bps |
| Low                  | : | 0 | 0 bps |
| Medium-low           | : | 0 | 0 bps |
| Medium-high          | : | 0 | 0 bps |
| High                 | : | 0 | 0 bps |

Packet Forwarding Engine Chassis Queues:

Queues: 8 supported, 8 in use

Queue: 0, Forwarding classes: DEFAULT



## Queued:

|         |   |          |             |
|---------|---|----------|-------------|
| Packets | : | 371365   | 23620 pps   |
| Bytes   | : | 15597330 | 7936368 bps |

## Transmitted:

|                      |   |          |             |
|----------------------|---|----------|-------------|
| Packets              | : | 371365   | 23620 pps   |
| Bytes                | : | 15597330 | 7936368 bps |
| Tail-dropped packets | : | 0        | 0 pps       |
| RED-dropped packets  | : | 0        | 0 pps       |
| Low                  | : | 0        | 0 pps       |
| Medium-low           | : | 0        | 0 pps       |
| Medium-high          | : | 0        | 0 pps       |
| High                 | : | 0        | 0 pps       |
| RED-dropped bytes    | : | 0        | 0 bps       |
| Low                  | : | 0        | 0 bps       |
| Medium-low           | : | 0        | 0 bps       |
| Medium-high          | : | 0        | 0 bps       |
| High                 | : | 0        | 0 bps       |

## Queue: 1, Forwarding classes: REALTIME

## Queued:

|         |   |   |       |
|---------|---|---|-------|
| Packets | : | 0 | 0 pps |
| Bytes   | : | 0 | 0 bps |

## Transmitted:

|                      |   |   |       |
|----------------------|---|---|-------|
| Packets              | : | 0 | 0 pps |
| Bytes                | : | 0 | 0 bps |
| Tail-dropped packets | : | 0 | 0 pps |
| RED-dropped packets  | : | 0 | 0 pps |
| Low                  | : | 0 | 0 pps |
| Medium-low           | : | 0 | 0 pps |
| Medium-high          | : | 0 | 0 pps |
| High                 | : | 0 | 0 pps |
| RED-dropped bytes    | : | 0 | 0 bps |



|             |   |   |       |
|-------------|---|---|-------|
| Low         | : | 0 | 0 bps |
| Medium-low  | : | 0 | 0 bps |
| Medium-high | : | 0 | 0 bps |
| High        | : | 0 | 0 bps |

Queue: 2, Forwarding classes: PRIVATE

Queued:

|         |   |   |       |
|---------|---|---|-------|
| Packets | : | 0 | 0 pps |
| Bytes   | : | 0 | 0 bps |

Transmitted:

|                      |   |   |       |
|----------------------|---|---|-------|
| Packets              | : | 0 | 0 pps |
| Bytes                | : | 0 | 0 bps |
| Tail-dropped packets | : | 0 | 0 pps |
| RED-dropped packets  | : | 0 | 0 pps |
| Low                  | : | 0 | 0 pps |
| Medium-low           | : | 0 | 0 pps |
| Medium-high          | : | 0 | 0 pps |
| High                 | : | 0 | 0 pps |
| RED-dropped bytes    | : | 0 | 0 bps |
| Low                  | : | 0 | 0 bps |
| Medium-low           | : | 0 | 0 bps |
| Medium-high          | : | 0 | 0 bps |
| High                 | : | 0 | 0 bps |

Queue: 3, Forwarding classes: CONTROL

Queued:

|         |   |         |        |
|---------|---|---------|--------|
| Packets | : | 32843   | 0 pps  |
| Bytes   | : | 2641754 | 56 bps |

Transmitted:

|                      |   |         |        |
|----------------------|---|---------|--------|
| Packets              | : | 32843   | 0 pps  |
| Bytes                | : | 2641754 | 56 bps |
| Tail-dropped packets | : | 0       | 0 pps  |



|                     |   |   |       |
|---------------------|---|---|-------|
| RED-dropped packets | : | 0 | 0 pps |
| Low                 | : | 0 | 0 pps |
| Medium-low          | : | 0 | 0 pps |
| Medium-high         | : | 0 | 0 pps |
| High                | : | 0 | 0 pps |
| RED-dropped bytes   | : | 0 | 0 bps |
| Low                 | : | 0 | 0 bps |
| Medium-low          | : | 0 | 0 bps |
| Medium-high         | : | 0 | 0 bps |
| High                | : | 0 | 0 bps |

Queue: 4, Forwarding classes: CLASS\_B\_OUTPUT

Queued:

|         |   |   |       |
|---------|---|---|-------|
| Packets | : | 0 | 0 pps |
| Bytes   | : | 0 | 0 bps |

Transmitted:

|                      |   |   |       |
|----------------------|---|---|-------|
| Packets              | : | 0 | 0 pps |
| Bytes                | : | 0 | 0 bps |
| Tail-dropped packets | : | 0 | 0 pps |
| RED-dropped packets  | : | 0 | 0 pps |
| Low                  | : | 0 | 0 pps |
| Medium-low           | : | 0 | 0 pps |
| Medium-high          | : | 0 | 0 pps |
| High                 | : | 0 | 0 pps |
| RED-dropped bytes    | : | 0 | 0 bps |
| Low                  | : | 0 | 0 bps |
| Medium-low           | : | 0 | 0 bps |
| Medium-high          | : | 0 | 0 bps |
| High                 | : | 0 | 0 bps |

Queue: 5, Forwarding classes: CLASS\_C\_OUTPUT

Queued:

|         |   |   |       |
|---------|---|---|-------|
| Packets | : | 0 | 0 pps |
|---------|---|---|-------|



|                                              |   |   |       |
|----------------------------------------------|---|---|-------|
| Bytes                                        | : | 0 | 0 bps |
| Transmitted:                                 |   |   |       |
| Packets                                      | : | 0 | 0 pps |
| Bytes                                        | : | 0 | 0 bps |
| Tail-dropped packets                         | : | 0 | 0 pps |
| RED-dropped packets                          | : | 0 | 0 pps |
| Low                                          | : | 0 | 0 pps |
| Medium-low                                   | : | 0 | 0 pps |
| Medium-high                                  | : | 0 | 0 pps |
| High                                         | : | 0 | 0 pps |
| RED-dropped bytes                            | : | 0 | 0 bps |
| Low                                          | : | 0 | 0 bps |
| Medium-low                                   | : | 0 | 0 bps |
| Medium-high                                  | : | 0 | 0 bps |
| High                                         | : | 0 | 0 bps |
| Queue: 6, Forwarding classes: CLASS_V_OUTPUT |   |   |       |
| Queued:                                      |   |   |       |
| Packets                                      | : | 0 | 0 pps |
| Bytes                                        | : | 0 | 0 bps |
| Transmitted:                                 |   |   |       |
| Packets                                      | : | 0 | 0 pps |
| Bytes                                        | : | 0 | 0 bps |
| Tail-dropped packets                         | : | 0 | 0 pps |
| RED-dropped packets                          | : | 0 | 0 pps |
| Low                                          | : | 0 | 0 pps |
| Medium-low                                   | : | 0 | 0 pps |
| Medium-high                                  | : | 0 | 0 pps |
| High                                         | : | 0 | 0 pps |
| RED-dropped bytes                            | : | 0 | 0 bps |
| Low                                          | : | 0 | 0 bps |



```

Medium-low      :                0                0 bps
Medium-high     :                0                0 bps
High            :                0                0 bps
Queue: 7, Forwarding classes: CLASS_S_OUTPUT, GETS
Queued:
Packets         :                0                0 pps
Bytes           :                0                0 bps
Transmitted:
Packets         :                0                0 pps
Bytes           :                0                0 bps
Tail-dropped packets :                0                0 pps
RED-dropped packets :                0                0 pps
Low             :                0                0 pps
Medium-low     :                0                0 pps
Medium-high    :                0                0 pps
High           :                0                0 pps
RED-dropped bytes :                0                0 bps
Low            :                0                0 bps
Medium-low     :                0                0 bps
Medium-high    :                0                0 bps
High           :                0                0 bps

```

### show interfaces queue (QFX Series)

```

user@switch> show interfaces queue xe-0/0/15
Physical interface: xe-0/0/15, Enabled, Physical link is Up
Interface index: 49165, SNMP ifIndex: 539
Forwarding classes: 12 supported, 8 in use
Egress queues: 12 supported, 8 in use
Queue: 0, Forwarding classes: best-effort
Queued:
Packets         :                0                0 pps
Bytes           :                0                0 bps
Transmitted:
Packets         :                0                0 pps
Bytes           :                0                0 bps
Tail-dropped packets : Not Available
Total-dropped packets:                0                0 pps
Total-dropped bytes :                0                0 bps
Queue: 3, Forwarding classes: fcoe
Queued:
Packets         :                0                0 pps

```



```

        Bytes           :           0           0 bps
    Transmitted:
        Packets         :           0           0 pps
        Bytes           :           0           0 bps
        Tail-dropped packets : Not Available
        Total-dropped packets:           0           0 pps
        Total-dropped bytes :           0           0 bps
0 bps
Queue: 4, Forwarding classes: no-loss
Queued:
    Packets           :           0           0 pps
    Bytes             :           0           0 bps
Transmitted:
    Packets           :           0           0 pps
    Bytes             :           0           0 bps
    Tail-dropped packets : Not Available
    Total-dropped packets:           0           0 pps
    Total-dropped bytes :           0           0 bps
Queue: 7, Forwarding classes: network-control
Queued:
    Packets           :           0           0 pps
    Bytes             :           0           0 bps
Transmitted:
    Packets           :           0           0 pps
    Bytes             :           0           0 bps
    Tail-dropped packets : Not Available
    Total-dropped packets:           0           0 pps
    Total-dropped bytes :           0           0 bps
Queue: 8, Forwarding classes: mcast
Queued:
    Packets           :           0           0 pps
    Bytes             :           0           0 bps
Transmitted:
    Packets           :           0           0 pps
    Bytes             :           0           0 bps
    Tail-dropped packets : Not Available
    Total-dropped packets:           0           0 pps
    Total-dropped bytes :           0           0 bps

```

#### show interfaces queue l2-statistics (lsq interface)

```

user@switch> show interfaces queue lsq-2/2/0.2 l2-statistics
Logical interface lsq-2/2/0.2 (Index 69) (SNMP ifIndex 1598)
Forwarding classes: 16 supported, 4 in use
Egress queues: 8 supported, 4 in use
Burst size: 0
Queue: 0, Forwarding classes: be
Queued:
    Packets           :           1           0 pps
    Bytes             :          1001           0 bps
Transmitted:
    Packets           :           5           0 pps
    Bytes             :          1062           0 bps
    Tail-dropped packets :           0           0 pps
    RED-dropped packets :           0           0 pps
    RED-dropped bytes  :           0           0 bps
Queue: 1, Forwarding classes: ef
Queued:
    Packets           :           1           0 pps
    Bytes             :          1500           0 bps
Transmitted:
    Packets           :           6           0 pps
    Bytes             :          1573           0 bps

```



```
Tail-dropped packets :          0          0 pps
RED-dropped packets  :          0          0 pps
RED-dropped bytes    :          0          0 bps
Queue: 2, Forwarding classes: af
  Queued:
    Packets          :          1          0 pps
    Bytes            :         512          0 bps
  Transmitted:
    Packets          :          3          0 pps
    Bytes            :         549          0 bps
    Tail-dropped packets :          0          0 pps
    RED-dropped packets :          0          0 pps
    RED-dropped bytes  :          0          0 bps
Queue: 3, Forwarding classes: nc
  Queued:
    Packets          :          0          0 pps
    Bytes            :          0          0 bps
  Transmitted:
    Packets          :          0          0 pps
    Bytes            :          0          0 bps
    Tail-dropped packets :          0          0 pps
    RED-dropped packets :          0          0 pps
    RED-dropped bytes  :          0          0 bps
=====
```



## show pfe next-hop

---

|                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                        | <code>show pfe next-hop</code><br><code>&lt;interface <i>interface-name</i>&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Syntax (TX Matrix and TX Matrix Plus Routers)</b> | <code>show pfe next-hop</code><br><code>&lt;fpc <i>slot</i>&gt;</code><br><code>&lt;interface <i>interface-name</i>&gt;</code><br><code>&lt;lcc <i>number</i>&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>                           | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>                                   | Display Packet Forwarding Engine next-hop information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                                       | <p><b>none</b>—Display all Packet Forwarding Engine next-hop information.</p> <p><b>fpc <i>slot</i></b>—(TX Matrix and TX Matrix Plus routers only) (Optional) Show the next hops for a Flexible PIC Concentrator (FPC) slot.<br/>On a TX Matrix router, if you specify the number of a T640 router by using the <b>lcc <i>number</i></b> option (the recommended method), replace <b><i>slot</i></b> with a value from <b>0</b> through <b>7</b>. Otherwise, replace <b><i>slot</i></b> with a value from <b>0</b> through <b>31</b>. On a TX Matrix Plus router, if you specify the number of a T1600 router by using the <b>lcc <i>number</i></b> option (the recommended method), replace <b><i>slot</i></b> with a value from <b>0</b> through <b>7</b>. Otherwise, replace <b><i>slot</i></b> with a value from <b>0</b> through <b>31</b>. For example, the following commands have the same result:</p> <pre>user@host&gt; show pfe next-hop fpc 1 lcc 1 user@host&gt; show pfe next-hop fpc 9</pre> <p><b>interface <i>interface-name</i></b>—(Optional) Display the Packet Forwarding Engine next-hop interface.</p> <p><b>lcc <i>number</i></b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, the slot number of the T640 router (or line-card chassis) that houses the FPC. On a TX Matrix Plus router, the slot number of the T1600 router (or line-card chassis) that houses the FPC. Replace <b><i>number</i></b> with a value from <b>0</b> through <b>3</b>.</p> |
| <b>Required Privilege Level</b>                      | admin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>List of Sample Output</b>                         | <a href="#">show pfe next-hop on page 5405</a><br><a href="#">show pfe next-hop fpc (TX Matrix Router) on page 5405</a><br><a href="#">show pfe next-hop fpc (TX Matrix Plus Router) on page 5405</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |



## Sample Output

### show pfe next-hop

```
user@host> show pfe next-hop
```

```
NextHop Info:
```

| ID  | Type     | Interface  | Protocol | Encap       | Next Hop Addr | MTU  |
|-----|----------|------------|----------|-------------|---------------|------|
| 4   | Mcast    | -          | IPv4     | -           | 0.0.0.0       | 0    |
| 5   | Bcast    | -          | IPv4     | -           | -             | 0    |
| 7   | Discard  | -          | IPv4     | -           | -             | 0    |
| 8   | MDiscard | -          | IPv4     | -           | -             | 0    |
| 9   | Reject   | -          | IPv4     | -           | -             | 0    |
| 13  | Local    | -          | IPv4     | -           | 192.168.4.60  | 0    |
| 14  | Resolve  | fxp0.0     | IPv4     | Unspecified | -             | 0    |
| 17  | Local    | -          | IPv4     | -           | 127.0.0.1     | 0    |
| 18  | Unicast  | fxp0.0     | IPv4     | Unspecified | 192.168.4.254 | 0    |
| 21  | Local    | -          | IPv4     | -           | 11.1.0.1      | 0    |
| 22  | Unicast  | at-0/1/0.0 | IPv4     | ATM SNAP    | 11.1.0.2      | 4482 |
| ... |          |            |          |             |               |      |

### show pfe next-hop fpc (TX Matrix Router)

```
user@host> show pfe next-hop fpc 1
```

```
Slot 1
```

```
NextHop Info:
```

| ID  | Type              | Interface | Next Hop Addr  | Protocol | Encap       | MTU |
|-----|-------------------|-----------|----------------|----------|-------------|-----|
| 5   | Mcast             | -         | default        | IPv4     | -           | 0   |
| 6   | Bcast             | -         | -              | IPv4     | -           | 0   |
| 8   | Discard           | -         | -              | IPv4     | -           | 0   |
| 9   | MDiscard          | -         | -              | IPv4     | -           | 0   |
| 13  | Mcast             | -         | default        | IPv6     | -           | 0   |
| 17  | MDiscard          | -         | -              | IPv6     | -           | 0   |
| 18  | Reject            | -         | -              | IPv6     | -           | 0   |
| 24  | Discard           | -         | -              | None     | -           | 0   |
| 68  | Local             | -         | 192.168.66.113 | IPv4     | -           | 0   |
| 69  | Resolve           | fxp0.0    | -              | IPv4     | Unspecified | 0   |
| 70  | Unicast           | fxp0.0    | 192.168.71.254 | IPv4     | Unspecified | 0   |
| 256 | Local             | -         | 10.71.71.1     | IPv4     | -           | 0   |
| 257 | Local             | -         | 127.0.0.1      | IPv4     | -           | 0   |
| 258 | Mcast.local..1    | default   | -              | IPv4     | Unspecified | 0   |
| 259 | Bcast.local..1    | -         | -              | IPv4     | Unspecified | 0   |
| 261 | Discard.local..1  | -         | -              | IPv4     | Unspecified | 0   |
| 262 | MDiscard.local..1 | -         | -              | IPv4     | Unspecified | 0   |
| 269 | Mcast.local..1    | default   | -              | IPv6     | Unspecified | 0   |
| 271 | Discard.local..1  | -         | -              | IPv6     | Unspecified | 0   |
| ... |                   |           |                |          |             |     |

### show pfe next-hop fpc (TX Matrix Plus Router)

```
user@host> show pfe next-hop fpc 0
```

```
Slot 0
```

| ID | Type     | Interface | Next Hop Addr | Protocol | Encap | MTU |
|----|----------|-----------|---------------|----------|-------|-----|
| 31 | Mcast    | -         | default       | IPv4     | -     | 0   |
| 32 | Bcast    | -         | -             | IPv4     | -     | 0   |
| 34 | Discard  | -         | -             | IPv4     | -     | 0   |
| 35 | MDiscard | -         | -             | IPv4     | -     | 0   |
| 36 | Reject   | -         | -             | IPv4     | -     | 0   |
| 39 | Mcast    | -         | default       | IPv6     | -     | 0   |
| 42 | Discard  | -         | -             | IPv6     | -     | 0   |



|     |          |             |                      |      |             |   |
|-----|----------|-------------|----------------------|------|-------------|---|
| 43  | MDiscard | -           | -                    | IPv6 | -           | 0 |
| 44  | Reject   | -           | -                    | IPv6 | -           | 0 |
| 49  | Receive  | -           | -                    | MPLS | -           | 0 |
| 50  | Discard  | -           | -                    | MPLS | -           | 0 |
| 111 | Mcast    | .local..1   | default              | IPv4 | Unspecified | 0 |
| 112 | Bcast    | .local..1   | -                    | IPv4 | Unspecified | 0 |
| 114 | Discard  | .local..1   | -                    | IPv4 | Unspecified | 0 |
| 115 | MDiscard | .local..1   | -                    | IPv4 | Unspecified | 0 |
| 116 | Reject   | .local..1   | -                    | IPv4 | Unspecified | 0 |
| 119 | Mcast    | .local..1   | default              | IPv6 | Unspecified | 0 |
| 122 | Discard  | .local..1   | -                    | IPv6 | Unspecified | 0 |
| 123 | MDiscard | .local..1   | -                    | IPv6 | Unspecified | 0 |
| 124 | Reject   | .local..1   | -                    | IPv6 | Unspecified | 0 |
| 191 | Mcast    | .local..2   | default              | IPv4 | Unspecified | 0 |
| 192 | Bcast    | .local..2   | -                    | IPv4 | Unspecified | 0 |
| 194 | Discard  | .local..2   | -                    | IPv4 | Unspecified | 0 |
| 195 | MDiscard | .local..2   | -                    | IPv4 | Unspecified | 0 |
| 196 | Reject   | .local..2   | -                    | IPv4 | Unspecified | 0 |
| 322 | Local    | -           | 10.1.0.5             | IPv4 | -           | 0 |
| 323 | Resolve  | bcm0.0      | -                    | IPv4 | Unspecified | 0 |
| 326 | Local    | -           | 129.0.0.5            | IPv4 | -           | 0 |
| 327 | Resolve  | bcm0.0      | -                    | IPv4 | Unspecified | 0 |
| 328 | Local    | -           | fe80::201:ff:fe01:5  |      |             |   |
| 329 | Receive  | bcm0.0      | ff02::1:ff01:5       | IPv6 | -           | 0 |
| 330 | Receive  | bcm0.0      | fe80::               | IPv6 | Unspecified | 0 |
| 331 | Resolve  | bcm0.0      | -                    | IPv6 | Unspecified | 0 |
| 332 | Local    | -           | fec0::a:1:0:5        | IPv6 | -           | 0 |
| 333 | Receive  | bcm0.0      | ff02::1:ff00:5       | IPv6 | Unspecified | 0 |
| 334 | Receive  | bcm0.0      | fec0::               | IPv6 | Unspecified | 0 |
| 335 | Resolve  | bcm0.0      | -                    | IPv6 | Unspecified | 0 |
| 348 | Local    | -           | 192.168.178.4        | IPv4 | -           | 0 |
| 349 | Resolve  | em0.0       | -                    | IPv4 | Unspecified | 0 |
| 350 | Unicast  | em0.0       | 192.168.178.126      | IPv4 | Unspecified | 0 |
| 357 | Local    | -           | fe80::201:1ff:fe01:5 |      |             |   |
| 512 | Local    | -           | 10.255.178.11        | IPv4 | -           | 0 |
| 513 | Local    | -           | 127.0.0.1            | IPv4 | -           | 0 |
| 515 | Local    | -           | abcd::10:255:178:11  | IPv6 | -           | 0 |
| 516 | Local    | -           | fe80::200:ff:fe00:0  |      |             |   |
| 517 | Local    | -           | 127.0.0.1            | IPv4 | -           | 0 |
| 518 | Mcast    | .local..3   | default              | IPv4 | Unspecified | 0 |
| 519 | Bcast    | .local..3   | -                    | IPv4 | Unspecified | 0 |
| 521 | Discard  | .local..3   | -                    | IPv4 | Unspecified | 0 |
| 522 | MDiscard | .local..3   | -                    | IPv4 | Unspecified | 0 |
| 523 | Reject   | .local..3   | -                    | IPv4 | Unspecified | 0 |
| 531 | Mcast    | .local..3   | default              | IPv6 | Unspecified | 0 |
| 533 | Discard  | .local..3   | -                    | IPv6 | Unspecified | 0 |
| 534 | MDiscard | .local..3   | -                    | IPv6 | Unspecified | 0 |
| 535 | Reject   | .local..3   | -                    | IPv6 | Unspecified | 0 |
| 539 | Mgroup   | -           | -                    | IPv4 | -           | 0 |
| 540 | Bcast    | ge-15/0/3.0 | -                    | IPv4 | Ethernet    | 0 |
| 541 | Receive  | ge-15/0/3.0 | 14.2.1.0             | IPv4 | Ethernet    | 0 |
| 542 | Local    | -           | 14.2.1.1             | IPv4 | -           | 0 |
| 543 | Resolve  | ge-15/0/3.0 | -                    | IPv4 | Ethernet    | 0 |
| 544 | Bcast    | ge-31/0/4.0 | -                    | IPv4 | Ethernet    | 0 |
| 545 | Receive  | ge-31/0/4.0 | 14.1.1.0             | IPv4 | Ethernet    | 0 |
| 546 | Local    | -           | 14.1.1.1             | IPv4 | -           | 0 |
| 547 | Resolve  | ge-31/0/4.0 | -                    | IPv4 | Ethernet    | 0 |



|     |         |             |          |      |          |   |
|-----|---------|-------------|----------|------|----------|---|
| 548 | Unicast | ge-31/0/4.0 | 14.1.1.2 | IPv4 | Ethernet | 0 |
| 549 | Unicast | ge-15/0/3.0 | 14.2.1.2 | IPv4 | Ethernet | 0 |
| 550 | Bcast   | ae1.0       | -        | IPv4 | Ethernet | 0 |
| 551 | Receive | ae1.0       | 11.1.1.0 | IPv4 | Ethernet | 0 |
| 552 | Local   | -           | 11.1.1.1 | IPv4 | -        | 0 |
| 553 | Resolve | ae1.0       | -        | IPv4 | Ethernet | 0 |
| 554 | Aggreg. | ae1.0       | -        | IPv4 | Ethernet | 0 |
| 555 | Unicast | ge-23/0/8.0 | 11.1.1.2 | IPv4 | Ethernet | 0 |
| 556 | Unicast | ge-7/0/9.0  | 11.1.1.2 | IPv4 | Ethernet | 0 |
| 557 | Aggreg. | ae1.0       | -        | MPLS | Ethernet | 0 |
| 558 | Unicast | ge-23/0/8.0 | -        | MPLS | Ethernet | 0 |
| 559 | Unicast | ge-7/0/9.0  | -        | MPLS | Ethernet | 0 |
| 560 | Aggreg. | ae1.0       | -        | MPLS | Ethernet | 0 |
| 561 | Unicast | ge-23/0/8.0 | -        | MPLS | Ethernet | 0 |
| 562 | Unicast | ge-7/0/9.0  | -        | MPLS | Ethernet | 0 |



## show pfe route

|                                                      |                                                                                                                                                                                                                                |
|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                        | <pre>show pfe route &lt;&lt;inet6   ip   iso&gt; &lt;prefix prefix&gt;   &lt;table &lt;table-name&gt; &lt;index index&gt; &lt;prefix prefix&gt;&gt;&gt; &lt;mpls&gt; &lt;summary&gt;</pre>                                     |
| <b>Syntax (EX Series Switch and QFX Series)</b>      | <pre>show pfe route &lt;&lt;inet6   ip&gt; &lt;prefix prefix&gt;   &lt;table &lt;table-name&gt; &lt;index index&gt; &lt;prefix prefix&gt;&gt;&gt; &lt;mpls&gt; &lt;summary&gt;</pre>                                           |
| <b>Syntax (TX Matrix and TX Matrix Plus Routers)</b> | <pre>show pfe route &lt;fpc slot&gt; &lt;&lt;inet6   ip   iso&gt; &lt;prefix prefix&gt;   &lt;table &lt;table-name&gt; &lt;index index&gt; &lt;prefix prefix&gt;&gt;&gt; &lt;lcc number&gt; &lt;mpls&gt; &lt;summary&gt;</pre> |

**Release Information** Command introduced before Junos OS Release 7.4.  
 Command introduced in Junos OS Release 9.0 for EX Series switches.  
 Command introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Display the routes in the Packet Forwarding Engine forwarding table. The Packet Forwarding Engine forwards packets between input and output interfaces.



**NOTE:** The Routing Engine maintains a master copy of the forwarding table. It copies the forwarding table to the Packet Forwarding Engine, which is the part of the router or switch responsible for forwarding packets. To display the routes in the Routing Engine forwarding table, use the `show route forwarding table` command. For more information, see the Junos OS Operational Mode Commands.

**Options** **none**—Display all Packet Forwarding Engine forwarding table information.

**fpc slot**—(TX Matrix and TX Matrix Plus routers only) (Optional) Show the next hops for a Flexible PIC Concentrator (FPC) slot.

On a TX Matrix router, if you specify the number of a T640 router by using the **lcc number** option (the recommended method), replace **slot** with a value from 0 through 7. Otherwise, replace **slot** with a value from 0 through 31. On a TX Matrix Plus router, if you specify the number of a T1600 router by using the **lcc number** option (the recommended method), replace **slot** with a value from 0 through 7. Otherwise, replace **slot** with a value from 0 through 31. For example, the following commands have the same result:

```
user@host> show pfe route fpc 1 lcc 1
user@host> show pfe route fpc 9
```



**index *index***—(Optional) Display table index.

**inet6**—(Optional) Display Packet Forwarding Engine IPv6 routes.

**ip**—(Optional) Display Packet Forwarding Engine IPv4 routes.

**iso** —(Optional) Display ISO version routing tables.

**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, the slot number of the T640 router (or line-card chassis) that houses the FPC. On a TX Matrix Plus router, the slot number of the T1600 router (or line-card chassis) that houses the FPC. Replace ***number*** with a value from 0 through 3.

**mpls**—(Optional) Display Packet Forwarding Engine MPLS information.

**prefix *prefix***—(Optional) IPv4 or IPv6 prefix for which to show table entries.

**summary**—(Optional) Display summary of Packet Forwarding Engine information.

**table <*table-name*>**—(Optional) Display table information.

**Required Privilege  
Level**

admin

**List of Sample Output**

[show pfe route ip on page 5410](#)

[show pfe route iso on page 5410](#)

[show pfe route lcc summary \(TX Matrix Router\) on page 5410](#)

[show pfe route lcc summary \(TX Matrix Plus Router\) on page 5411](#)



## Sample Output

### show pfe route ip

```
user@host> show pfe route ip
```

```
IPv4 Route Table 0, default.0, 0x0:
```

| Destination      | NH IP Addr     | Type    | NH ID | Interface  |
|------------------|----------------|---------|-------|------------|
| -----            |                |         |       |            |
| default          |                | Discard | 8     |            |
| 127.0.0.1        | 127.0.0.1      | Local   | 256   |            |
| 172.16/12        | 192.168.71.254 | Unicast | 68    | fxp0.0     |
| 192.168.0/18     | 192.168.71.254 | Unicast | 68    | fxp0.0     |
| 192.168.40/22    | 192.168.71.254 | Unicast | 68    | fxp0.0     |
| 192.168.64/18    | 192.168.71.254 | Unicast | 68    | fxp0.0     |
| 192.168.64/21    |                | Resolve | 67    | fxp0.0     |
| 192.168.71.249   | 192.168.71.249 | Local   | 66    |            |
| 192.168.220.0/30 |                | Resolve | 303   | fe-0/0/0.0 |
| 192.168.220.0    | 192.168.220.0  | Receive | 301   | fe-0/0/0.0 |
| 224.0.0.1        |                | Mcast   | 5     |            |
| 255.255.255.255  |                | Bcast   | 6     |            |

```
...
```

### show pfe route iso

```
user@host# show pfe route iso
```

```
CLNS Route Table 0, CLNP.0, 0x0:
```

| Destination                                         | Type   | NH ID | Interface |
|-----------------------------------------------------|--------|-------|-----------|
| -----                                               |        |       |           |
| default                                             | Reject | 60    |           |
| 47.0005.80ff.f800.0000.0108.0001.0102.5508.2159/152 | Local  | 514   |           |
| 49.0001.00a0.c96b.c491/72                           | Local  | 536   |           |

### show pfe route lcc summary (TX Matrix Router)

```
user@host> show pfe route lcc 2 summary
```

```
Slot 0
```

```
IPv4 Route Tables:
```

| Index   | Routes | Size(b) |
|---------|--------|---------|
| -----   |        |         |
| Default | 43     | 3081    |
| 1       | 4      | 281     |

```
MPLS Route Tables:
```

| Index   | Routes | Size(b) |
|---------|--------|---------|
| -----   |        |         |
| Default | 1      | 68      |

```
IPv6 Route Tables:
```

| Index   | Routes | Size(b) |
|---------|--------|---------|
| -----   |        |         |
| Default | 9      | 717     |
| 1       | 5      | 389     |

```
Slot 1
```

```
IPv4 Route Tables:
```

| Index | Routes | Size(b) |
|-------|--------|---------|
| ----- |        |         |



|         |    |      |
|---------|----|------|
| Default | 43 | 3081 |
| 1       | 4  | 281  |

MPLS Route Tables:

| Index   | Routes | Size(b) |
|---------|--------|---------|
| -----   | -----  | -----   |
| Default | 1      | 68      |

IPv6 Route Tables:

| Index   | Routes | Size(b) |
|---------|--------|---------|
| -----   | -----  | -----   |
| Default | 9      | 717     |
| 1       | 5      | 389     |

Slot 16

IPv4 Route Tables:

| Index   | Routes | Size(b) |
|---------|--------|---------|
| -----   | -----  | -----   |
| Default | 41     | 2938    |
| 1       | 4      | 281     |

MPLS Route Tables:

| Index   | Routes | Size(b) |
|---------|--------|---------|
| -----   | -----  | -----   |
| Default | 1      | 68      |

IPv6 Route Tables:

| Index   | Routes | Size(b) |
|---------|--------|---------|
| -----   | -----  | -----   |
| Default | 9      | 717     |
| 1       | 5      | 389     |

Slot 17

IPv4 Route Tables:

| Index   | Routes | Size(b) |
|---------|--------|---------|
| -----   | -----  | -----   |
| Default | 41     | 2938    |
| 1       | 4      | 281     |

MPLS Route Tables:

| Index   | Routes | Size(b) |
|---------|--------|---------|
| -----   | -----  | -----   |
| Default | 1      | 68      |

IPv6 Route Tables:

| Index   | Routes | Size(b) |
|---------|--------|---------|
| -----   | -----  | -----   |
| Default | 9      | 717     |
| 1       | 5      | 389     |

show pfe route lcc  
summary (TX Matrix  
Plus Router)

user@host&gt; show pfe route lcc 2 summary

Slot 0

IPv4 Route Tables:

| Index | Routes | Size(b) |
|-------|--------|---------|
|-------|--------|---------|



|         |    |      |
|---------|----|------|
| Default | 25 | 2266 |
| 1       | 9  | 815  |
| 2       | 6  | 545  |
| 3       | 5  | 453  |
| 4       | 15 | 1371 |
| 5       | 5  | 453  |
| 6       | 13 | 1187 |

## MPLS Route Tables:

| Index   | Routes | Size(b) |
|---------|--------|---------|
| Default | 1      | 88      |
| 4       | 5      | 452     |

## IPv6 Route Tables:

| Index   | Routes | Size(b) |
|---------|--------|---------|
| Default | 7      | 697     |
| 1       | 13     | 1305    |
| 3       | 4      | 385     |
| 4       | 4      | 385     |
| 5       | 4      | 385     |
| 6       | 18     | 1833    |

## Slot 6

## IPv4 Route Tables:

| Index   | Routes | Size(b) |
|---------|--------|---------|
| Default | 25     | 2266    |
| 1       | 9      | 815     |
| 2       | 6      | 545     |
| 3       | 5      | 453     |
| 4       | 15     | 1371    |
| 5       | 5      | 453     |
| 6       | 13     | 1187    |

## MPLS Route Tables:

| Index   | Routes | Size(b) |
|---------|--------|---------|
| Default | 1      | 88      |
| 4       | 5      | 452     |

## IPv6 Route Tables:

| Index   | Routes | Size(b) |
|---------|--------|---------|
| Default | 7      | 697     |
| 1       | 13     | 1305    |
| 3       | 4      | 385     |
| 4       | 4      | 385     |
| 5       | 4      | 385     |
| 6       | 18     | 1833    |
| ...     |        |         |



## show pfe terse

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                       | show pfe terse                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Syntax (TX Matrix and TX Matrix Plus Router)</b> | show pfe terse<br><lcc <i>number</i>   scc><br><sfc <i>number</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Syntax (MX Series Router)</b>                    | show pfe terse<br><all-members><br><local><br><member <i>member-id</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>                          | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>                                  | Display Packet Forwarding Engine status information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                                      | <p><b>none</b>—Display brief information about the Packet Forwarding Engine.</p> <p><b>all-members</b>—(MX Series routers only) (Optional) Display Packet Forwarding Engine status information for all members in the Virtual Chassis configuration.</p> <p><b>lcc <i>number</i></b>—(TX Matrix and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display Packet Forwarding Engine information for a specific T640 router (or line-card chassis) that is connected to a TX Matrix router. On a TX Matrix Plus router, display Packet Forwarding Engine information for a specific T1600 router (or line-card chassis) that is connected to a TX Matrix Plus router. Replace <i>number</i> with a value from 0 through 3.</p> <p><b>local</b>—(MX Series routers only) (Optional) Display Packet Forwarding Engine status information for the local Virtual Chassis member.</p> <p><b>member <i>member-id</i></b>—(MX Series routers only) (Optional) Display Packet Forwarding Engine status information for the specified member of the Virtual Chassis configuration. Replace <i>member-id</i> with a value of 0 or 1.</p> <p><b>scc</b>—(TX Matrix routers only) (Optional) Display Packet Forwarding Engine information for the TX Matrix router (or switch-card chassis).</p> <p><b>sfc</b>—(TX Matrix Plus routers only) (Optional) Display Packet Forwarding Engine information for the TX Matrix Plus router (or switch-fabric chassis).</p> |
| <b>Required Privilege Level</b>                     | admin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>List of Sample Output</b>                        | <a href="#">show pfe terse (TX Matrix Router) on page 5414</a><br><a href="#">show pfe terse (TX Matrix Plus Router) on page 5414</a><br><a href="#">show pfe terse sfc (TX Matrix Plus Router) on page 5414</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |



## Sample Output

### show pfe terse (TX Matrix Router)

```
user@host> show pfe terse
Slot Type Slot State Flags Uptime
 0 SFM Present Online 0x0bf 01:25:42
 2 SFM Present Online 0x0bf 01:25:40
 0 FPC Present Online 0x102 01:25:57
 1 FPC Present Online 0x102 01:25:55
 2 FPC Present Online 0x102 01:25:53
```

### show pfe terse (TX Matrix Plus Router)

```
user@host> show pfe terse
sfc0-re0:
-----
Slot Type Slot State Uptime
 0 LCC Present Online 2d 05:26

lcc0-re0:
-----
Slot Type Slot State Uptime
 0 GFPC Present Online 2d 05:25
 1 GFPC Present Online 2d 05:25
```

### show pfe terse sfc (TX Matrix Plus Router)

```
user@host> show pfe terse sfc 0
sfc0-re0:
-----
Slot Type Slot State Uptime
 0 LCC Present Online 2d 05:25
```



---

## show pfe version

---

|                                 |                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show pfe version <brief   detail>                                                                                  |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Display Packet Forwarding Engine version information.                                                              |
| <b>Options</b>                  | <b>brief   detail</b> —Display the specified level of output.                                                      |
| <b>Required Privilege Level</b> | admin                                                                                                              |
| <b>List of Sample Output</b>    | <a href="#">show pfe version brief on page 5415</a><br><a href="#">show pfe version detail on page 5415</a>        |

### Sample Output

**show pfe version brief**      user@host> show pfe version brief  
PFED release 11.1D0 built by builder on 2010-11-11 05:16:11 UTC

**show pfe version detail**      user@host> show pfe version detail  
PFED release 11.1D0 built by builder on 2010-11-11 05:16:11 UTC  
  
junos-core01.juniper.net:/volume/build/junos/rpd\_feb11/11.1/development/20101111.0/obj-i386/  
junos/usr.sbin/pfed







## CHAPTER 61

# Troubleshooting

- [Troubleshooting Procedures on page 5417](#)

### Troubleshooting Procedures

---

- [Troubleshooting Dropped FCoE Traffic on page 5417](#)
- [Troubleshooting Egress Bandwidth That Exceeds the Configured Maximum Bandwidth on page 5420](#)
- [Troubleshooting Egress Bandwidth That Exceeds the Configured Minimum Bandwidth on page 5421](#)
- [Troubleshooting Egress Queue Bandwidth Impacted by Congestion on page 5422](#)
- [Troubleshooting an Unexpected Rewrite Value on page 5423](#)
- [Troubleshooting a Port Reset on QFabric Systems When a Queue Stops Transmitting Traffic on page 5424](#)

### Troubleshooting Dropped FCoE Traffic

**Problem** Fibre Channel over Ethernet (FCoE) traffic for which you want guaranteed delivery is dropped.

**Cause** There are several possible causes of dropped FCoE traffic (the list numbers of the possible causes correspond to the list numbers of the solutions in the *Solution* section.):

1. Priority-based flow control (PFC) is not enabled on the FCoE priority (IEEE 802.1p code point) in both the input and output stanzas of the congestion notification profile.
2. The FCoE traffic is not classified correctly at the ingress interface. FCoE traffic should either use the default **fcoe** forwarding class and classifier configuration (maps the **fcoe** forwarding class to IEEE 802.1p code point 011) or be mapped to a lossless forwarding class and to the code point enabled for PFC on the input and output interfaces.
3. The congestion notification profile that enables PFC on the FCoE priority is not attached to the interface.
4. The forwarding class set (priority group) used for guaranteed delivery traffic does not include the forwarding class used for FCoE traffic.



5. Insufficient bandwidth has been allocated for the FCoE queue or for the forwarding class set to which the FCoE queue belongs.
6. If you are using Junos OS Release 12.2, the **fcoe** forwarding class has been explicitly configured instead of using the default **fcoe** forwarding class configuration (forwarding-class-to-queue mapping).



**NOTE:** If you are using Junos OS Release 12.2, use the default forwarding-class-to-queue mapping for the lossless **fcoe** and **no-loss** forwarding classes. If you explicitly configure the lossless forwarding classes, the traffic mapped to those forwarding classes is treated as lossy (best effort) traffic and does *not* receive lossless treatment.

7. If you are using Junos OS Release 12.3 or later and you are not using the default **fcoe** forwarding class configuration, the forwarding class used for FCoE is not configured with the **no-loss** packet drop attribute. In Junos OS 12.3 or later, explicit forwarding classes configurations must include the **no-loss** packet drop attribute to be treated as lossless forwarding classes.

**Solution** The list numbers of the possible solutions correspond to the list numbers of the causes in the *Cause* section.



1. Check the congestion notification profile (CNP) to see if PFC is enabled on the FCoE priority (the correct IEEE 802.1p code point) on both input and output interfaces. Use the **show class-of-service congestion-notification** operational command to show the code points that are enabled for PFC in each CNP.

If you are using the default configuration, FCoE traffic is mapped to code point 011 (priority 3). In this case, the input stanza of the CNP should show that PFC is enabled on code point 011, and the output stanza should show that priority 011 is mapped to flow control queue 3.

If you explicitly configured a forwarding class for FCoE traffic, ensure that:

- You specified the **no-loss** packet drop attribute in the forwarding class configuration
- The code point mapped to the FCoE forwarding class in the ingress classifier is the code point enabled for PFC in the CNP input stanza
- The code point and output queue used for FCoE traffic are mapped to each other in the CNP output stanza (if you are not using the default priority and queue, you must explicitly configure each output queue that you want to respond to PFC messages)

For example, if you explicitly configure a forwarding class for FCoE traffic that is mapped to output queue 5 and to code point 101 (priority 5), the output of the **show class-of-service congestion-notification** looks like:

```
Name: fcoe_p5_cnp, Index: 12183
Type: Input
Cable Length: 100 m
  Priority  PFC      MRU
  000      Disabled
  001      Disabled
  010      Disabled
  011      Disabled
  100      Disabled
  101      Enabled   2500
  110      Disabled
  111      Disabled
Type: Output
  Priority  Flow-Control-Queues
  101      5
```

2. Use the **show class-of-service classifier type ieee-802.1p** operational command to check if the classifier maps the forwarding class used for FCoE traffic to the correct IEEE 802.1p code point.
3. Ensure that the congestion notification profile and classifier are attached to the correct ingress interface. Use the operational command **show configuration class-of-service interfaces interface-name**.
4. Check that the forwarding class set includes the forwarding class used for FCoE traffic. Use the operational command **show configuration class-of-service forwarding-class-sets** to show the configured priority groups and their forwarding classes.



5. Verify the amount of bandwidth allocated to the queue mapped to the FCoE forwarding class and to the forwarding class set to which the FCoE traffic queue belongs. Use the **show configuration class-of-service schedulers *scheduler-name*** operational command (specify the scheduler for FCoE traffic as the *scheduler-name*) to see the minimum guaranteed bandwidth (**transmit-rate**) and maximum bandwidth (**shaping-rate**) for the queue.

Use the **show configuration class-of-service traffic-control-profiles *traffic-control-profile*** operational command (specify the traffic control profile used for FCoE traffic as the *traffic-control-profile*) to see the minimum guaranteed bandwidth (**guaranteed-rate**) and maximum bandwidth (**shaping-rate**) for the forwarding class set.

6. Delete the explicit FCoE forwarding-class-to-queue mapping so that the system uses the default FCoE forwarding-class-to-queue mapping. Include the **delete forwarding-classes class fcoe queue-num 3** statement at the **[edit class-of-service]** hierarchy level to remove the explicit configuration. The system then uses the default configuration for the FCoE forwarding class and preserves the lossless treatment of FCoE traffic.
7. Use the **show class-of-service forwarding-class** operational command to display the configured forwarding classes. The *No-Loss* column shows whether lossless transport is enabled or disabled for each forwarding class. If the forwarding class used for FCoE traffic is not enabled for lossless transport, include the **no-loss** packet drop attribute in the forwarding class configuration (**set class-of-service forwarding-classes class *fcoe-forwarding-class-name* queue-num *queue-number* no-loss**).

See “[Example: Configuring CoS PFC for FCoE Traffic](#)” on page 4509 for step-by-step instructions on how to configure PFC for FCoE traffic, including classifier, interface, congestion notification profile, PFC, and bandwidth scheduling configuration.

#### Related Documentation

- [show class-of-service congestion-notification on page 5281](#)
- [show class-of-service forwarding-class-set on page 5288](#)
- [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
- [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)
- [Overview of CoS Changes Introduced in Junos OS Release 12.2 on page 4820](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)

## Troubleshooting Egress Bandwidth That Exceeds the Configured Maximum Bandwidth

**Problem** The maximum bandwidth of a queue when measured at the egress port exceeds the maximum bandwidth (shaping rate) configured for the queue.

**Cause** When you configure bandwidth for a queue or a priority group, the switch accounts for the configured bandwidth as data only. The switch does not rate-shape the preamble and the interframe gap (IFG) associated with frames, so the switch does not account for the bandwidth consumed by the preamble and the IFG in its maximum bandwidth calculations.



The measured egress bandwidth can exceed the configured maximum bandwidth when small packet sizes (64 or 128 bytes) are transmitted because the preamble and the IFG are a larger percentage of the total traffic. For larger packet sizes, the preamble and IFG overhead are a small portion of the total traffic, and the effect on egress bandwidth is minor.

**Solution** When you calculate the bandwidth requirements for queues on which you expect a significant amount of traffic with small packet sizes, consider the shaping rate as the maximum bandwidth for the data only. Add sufficient bandwidth to your calculations to account for the preamble and IFG so that the port bandwidth is sufficient to handle the combined maximum data rate (shaping rate) and the preamble and IFG.

If the maximum bandwidth measured at the egress port exceeds the amount of bandwidth that you want to allocate to the queue, reduce the shaping rate for that queue.

**Related Documentation**

- [shaping-rate on page 5253](#)
- [Example: Configuring Maximum Output Bandwidth on page 5044](#)
- [Example: Configuring Queue Schedulers on page 5030](#)
- [Understanding CoS Output Queue Schedulers on page 4876](#)

## Troubleshooting Egress Bandwidth That Exceeds the Configured Minimum Bandwidth

**Problem** The minimum bandwidth of a queue or a priority group when measured at the egress port exceeds the minimum bandwidth configured for the queue (transmit-rate) or for the priority group (guaranteed-rate).

**Cause** When you configure bandwidth for a queue or a priority group, the switch accounts for the configured bandwidth as data only. The switch does not include the preamble and the interframe gap (IFG) associated with frames, so the switch does not account for the bandwidth consumed by the preamble and the IFG in its minimum bandwidth calculations.

The measured egress bandwidth can exceed the configured minimum bandwidth when small packet sizes (64 or 128 bytes) are transmitted because the preamble and the IFG are a larger percentage of the total traffic. For larger packet sizes, the preamble and IFG overhead are a small portion of the total traffic, and the effect on egress bandwidth is minor.



**NOTE:** The sum of the queue transmit rates in a priority group should not exceed the guaranteed rate for the priority group. (You cannot guarantee a minimum bandwidth for the queues that is greater than the minimum bandwidth guaranteed for the entire set of queues.)

**Solution** When you calculate the bandwidth requirements for queues and priority groups on which you expect a significant amount of traffic with small packet sizes, consider the transmit



rate and the guaranteed rate as the minimum bandwidth for the data only. Add sufficient bandwidth to your calculations to account for the preamble and IFG so that the port bandwidth is sufficient to handle the combined minimum data rate and the preamble and IFG.

If the minimum bandwidth measured at the egress port exceeds the amount of bandwidth that you want to allocate to a queue or to a priority group, reduce the transmit rate for that queue and reduce the guaranteed rate of the priority group that contains the queue.

**Related  
Documentation**

- [guaranteed-rate on page 5217](#)
- [transmit-rate on page 5260](#)
- [Example: Configuring Minimum Guaranteed Output Bandwidth on page 5040](#)
- [Example: Configuring Queue Schedulers on page 5030](#)
- [Understanding CoS Output Queue Schedulers on page 4876](#)

## Troubleshooting Egress Queue Bandwidth Impacted by Congestion

**Problem** Congestion on an egress port causes egress queues to receive less bandwidth than expected. Egress port congestion can impact the amount of bandwidth allocated to queues on the congested port and, in some cases, on ports that are not congested.

**Cause** Egress queue congestion can cause the ingress port buffer to fill above a certain threshold and affect the flow to the queues on the egress port. One queue receives its configured bandwidth, but the other queues on the egress port are affected and do not receive their configured share of bandwidth.

**Solution** The solution is to configure a drop profile to apply weighted random early detection (WRED) to the queue or queues on the congested ports.

Configure a drop profile on the queue that is receiving its configured bandwidth. This queue is preventing the other queues from receiving their expected bandwidth. The drop profile prevents the queue from affecting the other queues on the port.

To configure a tail-drop profile using the CLI:

- Name the drop profile and set the drop start point, drop end point, minimum drop rate, and maximum drop rate for the drop profile:

```
[edit class-of-service]
user@switch# set drop-profile drop-profile-name interpolate fill-level percentage fill-level
percentage drop-probability 0 drop-probability percentage
```

**Related  
Documentation**

- [drop-profile on page 5198](#)
- [Example: Configuring Tail-Drop Profiles on page 5019](#)
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Understanding CoS Tail-Drop Profiles on page 4929](#)



## Troubleshooting an Unexpected Rewrite Value

**Problem** Traffic from one or more forwarding classes on an egress port is assigned an unexpected rewrite value.



**NOTE:** For packets that carry both an inner VLAN tag and an outer VLAN tag, the rewrite rules rewrite only the outer VLAN tag.

**Cause** If you configure a rewrite rule for a forwarding class on an egress port but you do not configure a rewrite rule for every forwarding class on that egress port, then the forwarding classes that do not have a configured rewrite rule are assigned random rewrite values.

For example:

1. Configure forwarding classes **fc1**, **fc2**, and **fc3**.
2. Configure rewrite rules for forwarding classes **fc1** and **fc2**, but not for forwarding class **fc3**.
3. Assign forwarding classes **fc1**, **fc2**, and **fc3** to a port.

When traffic for these forwarding classes flows through the port, traffic for forwarding classes **fc1** and **fc2** is rewritten correctly. However, traffic for forwarding class **fc3** is assigned a random rewrite value.

**Solution** If any forwarding class on an egress port has a configured rewrite rule, then all forwarding classes on that egress port must have a configured rewrite rule. Configuring a rewrite rule for any forwarding class that is assigned a random rewrite value solves the problem.



**TIP:** If you want the forwarding class to use the same code point value assigned to it by the ingress classifier, specify that value as the rewrite rule value. For example, if a forwarding class has the IEEE 802.1 ingress classifier code point value 011, configure a rewrite rule for that forwarding class that uses the IEEE 802.1p code point value 011.



**NOTE:** There are no default rewrite rules. You can bind one rewrite rule for each type (DSCP and IEEE 802.1) to a given interface. A rewrite rule can contain multiple forwarding-class-to-rewrite-value associations.

1. Assign a rewrite value to a forwarding class. Add the new rewrite value to the same rewrite rule as the other forwarding classes on the port:

```
[edit class-of-service rewrite-rules]
```



```
user@switch# set (dscp | ieee-802.1) rewrite-name forwarding-class class-name loss-priority
priority code-point (alias | bits)
```

For example, if the other forwarding classes on the port use rewrite values defined in the rewrite rule **custom-rw**, the forwarding class **fcoe** is being randomly rewritten, and you want to use IEEE 802.1 code point **011** for the **fcoe** forwarding class:

```
[edit class-of-service rewrite-rules]
user@switch# set ieee-802.1 custom-rw forwarding-class fcoe loss-priority high code-point
011
```

2. Enable the rewrite rule on an interface if it is not already enabled on the desired interface:

```
[edit]
user@switch# set class-of-service interfaces interface-name unit unit rewrite-rules (dscp |
ieee-802.1) rewrite-rule-name
```

For example, to enable the rewrite rule **custom-rw** on interface **xe-0/0/24.0**:

```
[edit]
user@switch# set class-of-service interfaces xe-0/0/24 unit 0 rewrite-rules ieee-802.1
custom-rw
```

#### Related Documentation

- [interfaces on page 5228](#)
- [rewrite-rules on page 5246](#)
- [Defining CoS Rewrite Rules on page 5155](#)
- [Monitoring CoS Rewrite Rules on page 5268](#)

## Troubleshooting a Port Reset on QFabric Systems When a Queue Stops Transmitting Traffic

**Problem** In QFabric systems, if any queue that contains outgoing packets does not transmit packets for 12 consecutive seconds, the port automatically resets.

**Cause** Failure of a queue to transmit packets for 12 consecutive seconds may be due to:

- A strict-high priority queue consuming all of the port bandwidth
- Several queues consuming all of the port bandwidth
- Any queue or port receiving continuous priority-based flow control (PFC) or 802.3x Ethernet PAUSE messages (received PFC and PAUSE messages prevent a queue or a port, respectively, from transmitting packets because of network congestion)
- Other conditions that prevent a queue from obtaining port bandwidth for 12 consecutive seconds

**Solution** If the cause is a strict-high priority queue or other queues consuming all of the port bandwidth, you can use rate shaping to configure a maximum rate for the queues that are using all of the port bandwidth and preventing other queues from obtaining bandwidth on the port. You configure a maximum rate by creating a scheduler, using a scheduler map to apply it to a forwarding class (which maps to an output queue), and applying the scheduler map to the port using a forwarding class set and a traffic control profile.



To configure rate shaping using the CLI:

1. Name the existing scheduler or create a scheduler and define the maximum bandwidth as a rate or as a percentage:

```
[edit class-of-service]
user@switch# set schedulers scheduler-name shaping-rate (rate | percent percentage)
```

2. Configure a scheduler map to associate the scheduler with the forwarding class (queue) that is consuming all of the port bandwidth:

```
[edit class-of-service]
user@switch# set scheduler-maps scheduler-map-name forwarding-class
forwarding-class-name scheduler scheduler-name
```

3. Associate the scheduler map with a traffic control profile:

```
[edit class-of-service]
user@switch# set traffic-control-profiles traffic-control-profile-name scheduler-map
scheduler-map-name
```

4. Associate the traffic control profile (and thus the scheduler map that contains the rate shaping queue scheduler) with a forwarding class set and apply them to the interface that is being reset:

```
[edit class-of-service]
user@switch# set interfaces interface-name forwarding-class-set fc-set-name
output-traffic-control-profile traffic-control-profile-name
```

For example, a strict-high priority queue is using all of the bandwidth on interface **shpnode:xe-0/0/10** and preventing other queues from transmitting for 12 consecutive seconds. You decide to set a maximum rate of 7 Gbps on the strict-high priority queue to ensure that at least 3 Gbps of the port bandwidth is available to service other queues.

[Table 471 on page 5425](#) shows the topology for this example:

**Table 471: Components of the Rate Shaping Troubleshooting Example**

| Component                                  | Settings                                                                                                                                                                                                                                                                                                                                          |
|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Affected interface                         | <b>shpnode:xe-0/0/10</b>                                                                                                                                                                                                                                                                                                                          |
| Scheduler (strict-high priority scheduler) | Name: <b>shp-sched</b><br>Shaping rate: <b>7g</b><br>Priority: <b>strict-high</b><br><br><b>NOTE:</b> This example assumes that the scheduler already exists and has been configured as <b>strict-high</b> priority, but that rate shaping to prevent the strict-high priority traffic from using all of the port bandwidth has not been applied. |
| Scheduler map                              | Name: <b>shp-map</b><br>Forwarding class to associate with the <b>shp-sched</b> scheduler: <b>strict-high</b><br><br><b>NOTE:</b> This example assumes that a strict-high priority forwarding class has been configured and assigned the name <b>strict-high</b> .                                                                                |
| Traffic control profile                    | Name: <b>shp-tcp</b><br><br><b>NOTE:</b> This example does not describe how to define a complete traffic control profile.                                                                                                                                                                                                                         |



Table 471: Components of the Rate Shaping Troubleshooting Example (*continued*)

| Component                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Settings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Forwarding class set                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Name: <b>shp-pg</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <p>To configure the scheduler, map it to the strict-high priority forwarding class, and apply it to interface <b>shpnode:xe-0/0/10</b> using the CLI:</p> <ol style="list-style-type: none"> <li>Specify the scheduler for the strict-high priority queue (<b>shp-sched</b>) with a maximum bandwidth of 7 Gbps: <pre>[edit class-of-service schedulers] user@switch# set shp-sched shaping-rate 7g</pre> </li> <li>Configure a scheduler map (<b>shp-map</b>) that associates the scheduler (<b>shp-sched</b>) with the forwarding class (<b>strict-high</b>): <pre>[edit class-of-service scheduler-maps] user@switch# set shp-map forwarding-class strict-high scheduler shp-sched</pre> </li> <li>Associate the scheduler map <b>shp-map</b> with a traffic control profile (<b>shp-tcp</b>): <pre>[edit class-of-service traffic-control-profiles] user@switch# set shp-tcp scheduler-map shp-map</pre> </li> <li>Associate the traffic control profile <b>shp-tcp</b> with a forwarding class set (<b>shp-pg</b>) and the affected interface (<b>shpnode:xe-0/0/10</b>): <pre>[edit class-of-service] user@switch# set interfaces shpnode:xe-0/0/10 forwarding-class-set shp-pg output-traffic-control-profile shp-tcp</pre> </li> </ol> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Related Documentation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <ul style="list-style-type: none"> <li>• <a href="#">Understanding CoS Output Queue Schedulers on page 4876</a></li> <li>• <a href="#">Defining CoS Queue Scheduling Priority on page 5142</a></li> <li>• <a href="#">Example: Configuring Queue Schedulers on page 5030</a></li> <li>• <a href="#">Example: Configuring Traffic Control Profiles (Priority Group Scheduling) on page 5037</a></li> <li>• <a href="#">Example: Configuring Forwarding Class Sets on page 5027</a></li> <li>• <a href="#">Example: Configuring CoS Hierarchical Port Scheduling (ETS) on page 4962</a></li> </ul> |



## PART 19

# Network Management and Monitoring

- [Overview on page 5429](#)
- [Configuration on page 5509](#)
- [Administration on page 5723](#)
- [Troubleshooting on page 5809](#)







## CHAPTER 62

# Overview

- [Network Management on page 5429](#)
- [Automation Scripts on page 5435](#)
- [Fabric OAM on page 5451](#)
- [Junos Space on page 5453](#)
- [sFlow Technology on page 5456](#)
- [SNMP on page 5458](#)
- [System Log Messages on page 5505](#)

## Network Management

---

- [Understanding Device and Network Management Features on page 5429](#)
- [Understanding Network Management Implementation on the QFabric System on page 5432](#)
- [Understanding Telnet on the QFabric System on page 5433](#)
- [Understanding Tracing and Logging Operations on page 5433](#)

## Understanding Device and Network Management Features

After you install a QFX Series product in your network, you need to manage the device. The QFX Series products support features that you use to manage the device within the network, including the management of configuration, system performance, fault monitoring, and remote access.

[Table 472 on page 5429](#) lists the device and network management features on the QFX Series.

**Table 472: Device and Network Management Features on the QFX Series**

| Feature                                                                                                                                                                                                                                                          | Typical Uses     | Documentation                                                       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|---------------------------------------------------------------------|
| AI-Scripts and Advanced Insight Manager (AIM)—Automatically detect and monitor faults on the switch, and depending on the configuration on the AIM application, send notifications of potential problems, and submit problem reports to Juniper Support Systems. | Fault management | <a href="#">Advanced Insight Scripts (AI-Scripts) Release Notes</a> |



Table 472: Device and Network Management Features on the QFX Series (*continued*)

| Feature                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Typical Uses                                                                                                                                                                         | Documentation                                                                                                                                                                                                                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Alarms and LEDs on the switch—Show status of hardware components and indicate warning or error conditions.                                                                                                                                                                                                                                                                                                                                                                                     | Fault management                                                                                                                                                                     | <a href="#">“Chassis Alarm Messages on a QFX3500 Device” on page 5826</a>                                                                                                                                                                        |
| Firewall filters—Control the packets that are sent to and from the network, balance network traffic, and optimize performance.                                                                                                                                                                                                                                                                                                                                                                 | Performance management                                                                                                                                                               | <ul style="list-style-type: none"> <li>• <a href="#">Routing Policy Configuration Guide</a></li> <li>• <a href="#">Overview of Firewall Filters on page 4071</a></li> </ul>                                                                      |
| In-band management—Enables connection to the switch using the same interfaces through which customer traffic flows. Communication between the switch and a remote console is typically enabled using SSH and Telnet services. SSH provides secure encrypted communications, whereas Telnet provides unencrypted, and therefore less secure, access to the switch.                                                                                                                              | Remote access management                                                                                                                                                             | <ul style="list-style-type: none"> <li>• <a href="#">Configuring SSH Service for Remote Access to the Router or Switch on page 1229</a></li> <li>• <a href="#">Configuring Telnet Service for Remote Access to a Router or Switch</a></li> </ul> |
| Juniper Networks Junos OS automation scripts—Configuration and operations automation tools provided by Junos OS. These tools include commit scripts, operation scripts, event scripts, and event policies. Commit scripts enforce custom configuration rules, whereas operation scripts, event policies, and event scripts automate network troubleshooting and management.                                                                                                                    | <ul style="list-style-type: none"> <li>• Configuration management</li> <li>• Performance management</li> <li>• Fault management</li> </ul>                                           | <a href="#">Junos OS Configuration and Operations Automation Guide</a>                                                                                                                                                                           |
| Junos OS command-line interface (CLI)—CLI configuration statements that enable you to configure the switch based on your networking requirements, such as security, service, and performance.                                                                                                                                                                                                                                                                                                  | <ul style="list-style-type: none"> <li>• Configuration management</li> <li>• Performance management</li> <li>• User access management</li> <li>• Remote access management</li> </ul> | <a href="#">CLI User Guide</a>                                                                                                                                                                                                                   |
| Junos Space software—Multipurpose GUI-based network management system that includes a base platform, the Network Application Platform, and other optional applications such as Ethernet Design, Service Now, Service Insight, and Virtual Control.                                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>• Configuration management</li> <li>• Performance management</li> <li>• Fault management</li> </ul>                                           | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Junos Space Support on page 5453</a></li> <li>• <a href="#">Junos Space Network Application Platform User Guide</a></li> </ul>                                                |
| Junos XML API—XML representation of Junos OS configuration statements and operational mode commands. Junos XML configuration tag elements are the content to which the Junos XML protocol operations apply. Junos XML operational tag elements are equivalent in function to operational mode commands in the CLI, which you can use to retrieve status information for a device. The Junos XML API also includes tag elements that are the counterpart to Junos CLI configuration statements. | <ul style="list-style-type: none"> <li>• Configuration management</li> <li>• Performance management</li> <li>• Fault management</li> </ul>                                           | <ul style="list-style-type: none"> <li>• <a href="#">Junos XML API Configuration Reference</a></li> <li>• <a href="#">Junos XML API Operational Reference</a></li> </ul>                                                                         |



Table 472: Device and Network Management Features on the QFX Series (*continued*)

| Feature                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Typical Uses                                                                                                                               | Documentation                                                                                                                                                                                                                                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NETCONF XML management protocol—XML-based management protocol that client applications use to request and change configuration information on routing, switching, and security platforms running Junos OS. The NETCONF XML management protocol defines basic operations that are equivalent to Junos OS CLI configuration mode commands. Client applications use the protocol operations to display, edit, and commit configuration statements (among other operations), just as administrators use CLI configuration mode commands such as <b>show</b> , <b>set</b> , and <b>commit</b> to perform those operations. | <ul style="list-style-type: none"> <li>• Configuration management</li> <li>• Performance management</li> <li>• Fault management</li> </ul> | <i>NETCONF XML Management Protocol Guide</i>                                                                                                                                                                                                                                       |
| Operational mode commands—May be used to do the following: <ul style="list-style-type: none"> <li>• Monitor switch performance. For example, the <b>show chassis routing-engine</b> command shows the CPU utilization of the Routing Engine. High CPU utilization of the Routing Engine can affect performance of the switch.</li> <li>• View current activity and status of the device or network. For example, you can use the <b>ping</b> command to monitor and diagnose connectivity problems, and the <b>traceroute</b> command to locate points of failure on the network.</li> </ul>                          | <ul style="list-style-type: none"> <li>• Performance management</li> <li>• Fault management</li> </ul>                                     | Junos OS Operational Mode Commands                                                                                                                                                                                                                                                 |
| Out-of-band management—Enables connection to the switch through a management interface. Out-of-band management is supported on two dedicated management Ethernet interfaces as well as on the console and auxiliary ports. The management Ethernet interfaces connect directly to the Routing Engine. No transit traffic is allowed through the interfaces, separating customer and management traffic and ensuring that congestion or failures in the transit network do not affect the management of the switch.                                                                                                    | Remote access management                                                                                                                   | <ul style="list-style-type: none"> <li>• Connecting a QFX3500 Device to a Network for Out-of-Band Management</li> <li>• Connecting a QFX Series Device to a Management Console</li> <li>• <a href="#">Configuring Console and Auxiliary Port Properties on page 552</a></li> </ul> |
| SNMP Configuration Management MIB—Provides notification for configuration changes in the form of SNMP traps. Each trap contains the time at which the configuration change was committed, the name of the user who made the change, and the method by which the change was made. A history of the last 32 configuration changes is kept in jnxCmChgEventTable.                                                                                                                                                                                                                                                        | Configuration management                                                                                                                   | SNMP MIBs and Traps Reference                                                                                                                                                                                                                                                      |



Table 472: Device and Network Management Features on the QFX Series (*continued*)

| Feature                                                                                                                                                                                                                                                                                                                               | Typical Uses                                                                                       | Documentation                                                                                                                                                                                                                                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>SNMP MIBs and traps—Enable the monitoring of network devices from a central location. Use SNMP requests such as <b>get</b> and <b>walk</b> to monitor and view system activity.</p> <p>The QFX3500 switch supports SNMP Version 1 (v1), v2, and v3, and both standard and Juniper Networks enterprise-specific MIBs and traps.</p> | Fault management                                                                                   | <ul style="list-style-type: none"> <li>SNMP MIBs and Traps Reference</li> <li><a href="#">Understanding the Implementation of SNMP on page 5459</a></li> </ul>                                                                                                               |
| System log messages—Log details of system and user events, including errors. You can specify the severity and type of system log messages you wish to view or save, and configure the output to be sent to local or remote hosts.                                                                                                     | <ul style="list-style-type: none"> <li>Fault management</li> <li>User access management</li> </ul> | <ul style="list-style-type: none"> <li><i>Junos OS System Log Messages Reference</i></li> <li><a href="#">Overview of Junos OS System Log Messages on page 5505</a></li> <li><a href="#">Overview of Single-Chassis System Logging Configuration on page 5505</a></li> </ul> |

## Understanding Network Management Implementation on the QFabric System

This topic describes network management features on the QFabric system that are implemented differently than on other devices running Junos OS.

The following network management features are supported on the QFabric system:

- **System log messages**—The QFabric system monitors events that occur on its component devices, distributes system log messages about those events to all external system log message servers (hosts) that are configured, and archives the messages. Component devices include Node devices, Interconnect devices, Director devices, and the Virtual Chassis. You configure system log messages at the **[edit system syslog]** hierarchy level. Use the **show log filename** operational mode command to view messages.
- **Simple Network Management Protocol (SNMP) Version 1 (v1) and v2c**—SNMP monitors network devices from a central location. The SNMP implementation on the QFabric system supports the basic SNMP architecture of Junos OS with some limitations, including a reduced set of MIB objects, read-only access for SNMP communities, and limited support for SNMP requests. You configure SNMP at the **[edit snmp]** hierarchy level. Only the **show snmp statistics** operational mode command is supported, but you can issue SNMP requests using external SNMP client applications.
- **Advanced Insight Solutions (AIS)**—AIS provides tools and processes to automate the delivery of support services for the QFabric system. AIS components include Advanced Insight Scripts (AI-Scripts) and Advanced Insight Manager (AIM). You install AI-Scripts using the **request system scripts add** operational mode command. However, the **jais-activate-scripts.slax** file used during installation is preconfigured for the QFabric system and cannot be changed.

### Related Documentation

- [Advanced Insight Scripts \(AI-Scripts\) Release Notes](#)
- [Understanding Device and Network Management Features on page 5429](#)



- [Overview of Junos OS System Log Messages on page 5505](#)
- [Juniper Networks Enterprise-Specific MIBs on page 5484](#)
- [Standard SNMP MIBs on page 5475](#)

## Understanding Telnet on the QFabric System

This topic describes the support for the Telnet protocol on QFabric systems.

Telnet service is available for devices running Junos OS, including QFX Series devices. However, on QFabric systems, Telnet support is limited and the following conditions apply:

- You can telnet from a QFabric system to external devices that are connected to the QFabric system by way of the network Node group. To connect to these external devices, issue the **telnet** command from the QFabric default partition CLI.
- You cannot use the Telnet protocol to connect from the QFabric system default partition CLI to individual components. To access system components, you must issue the **request component login** command instead.

### Related Documentation

- [request component login on page 1345](#)
- [telnet](#)

## Understanding Tracing and Logging Operations

Tracing and logging operations enable you to track events that occur in the switch—both normal operations and error conditions—and to track the packets that are generated by or passed through the switch. The results of tracing and logging operations are placed in files in the **/var/log** directory on the switch.

The Junos OS supports remote tracing for the following processes:

- **chassisd**—Chassis-control process
- **eventd**—Event-processing process
- **cosd**—Class-of-service process

You configure remote tracing by using the **tracing** statement at the **[edit system]** hierarchy level.



**NOTE:** The **tracing** statement is not supported on the QFX3000 QFabric system.

If you enabled remote tracing but wish to disable it for specific processes on the switch, use the **no-remote-trace** statement at the **[edit process-name traceoptions]** hierarchy level. This feature does not alter local tracing functionality in any way, and logging files are stored on the switch.



Logging operations use a system logging mechanism similar to the UNIX **syslogd** utility to record systemwide, high-level operations, such as interfaces going up or down and users logging in to or out of the switch. You configure these operations by using the **syslog** statement at the **[edit system]** hierarchy level and by using the **options** statement at the **[edit ethernet-switching-options]** hierarchy level.

Tracing operations record more detailed information about the operations of the switch, including packet forwarding and routing information. To configure tracing operations, use the **traceoptions** statement.



**NOTE:** The **traceoptions** statement is not supported on the QFX3000 QFabric system.

You can define tracing operations in different portions of the switch configuration:

- **SNMP agent activity tracing operations**—Define tracing of the activities of SNMP agents on the switch. You configure SNMP agent activity tracing operations at the **[edit snmp]** hierarchy level.
- **Global switching tracing operations**—Define tracing for all switching operations. You configure global switching tracing operations at the **[edit ethernet-switching-options]** hierarchy level of the configuration.
- **Protocol-specific tracing operations**—Define tracing for a specific routing protocol. You configure protocol-specific tracing operations in the **[edit protocols]** hierarchy when configuring the individual routing protocol. Protocol-specific tracing operations override any equivalent operations that you specify in the global **traceoptions** statement. If there are no equivalent operations, they supplement the global tracing options. If you do not specify any protocol-specific tracing, the routing protocol inherits all the global tracing operations.
- **Tracing operations within individual routing protocol entities**—Some protocols allow you to define more granular tracing operations. For example, in Border Gateway Protocol (BGP), you can configure peer-specific tracing operations. These operations override any equivalent BGP-wide operations or, if there are no equivalents, supplement them. If you do not specify any peer-specific tracing operations, the peers inherit, first, all the BGP-wide tracing operations and, second, the global tracing operations.
- **Interface tracing operations**—Define tracing for individual interfaces and for the interface process itself. You define interface tracing operations at the **[edit interfaces]** hierarchy level of the configuration.
- **Remote tracing**—To enable system-wide remote tracing, configure the **destination-override syslog host** statement at the **[edit system tracing]** hierarchy level. This specifies the remote host running the system log process (syslogd), which collects the traces. Traces are written to files on the remote host in accordance with the syslogd configuration in **/etc/syslog.conf**. By default, remote tracing is not configured.

To override the system-wide remote tracing configuration for a particular process, include the **no-remote-trace** statement at the **[edit process-name traceoptions]** hierarchy. When **no-remote-trace** is enabled, the process does local tracing.



To collect traces, use the **local0** facility as the selector in the **/etc/syslog.conf** file on the remote host. To separate traces from various processes into different files, include the process name or trace-file name (if it is specified at the [edit **process-name traceoptions file**] hierarchy level) in the Program field in the **/etc/syslog.conf** file. If your system log server supports parsing hostname and program name, then you can separate traces from the various processes.



**NOTE:** During a commit check, warnings about the **traceoptions** configuration (for example, mismatch in trace file sizes or number of trace files) are not displayed on the console. However, these warnings are logged in the system log messages when the new configuration is committed.

#### Related Documentation

- [Overview of Junos OS System Log Messages on page 5505](#)

## Automation Scripts

- [Understanding Automation Scripts Support on page 5435](#)
- [How Commit Scripts Work on page 5436](#)
- [Avoiding Potential Conflicts When Using Multiple Commit Scripts on page 5441](#)
- [Overview of Generating Persistent or Transient Configuration Changes on page 5442](#)
- [Required Boilerplate for Commit Scripts on page 5447](#)
- [How Op Scripts Work on page 5448](#)
- [Required Boilerplate for Op Scripts on page 5449](#)

## Understanding Automation Scripts Support

This document describes the support for the Junos OS automation scripts on the QFabric system Director devices.

Junos OS automation consists of a suite of tools used to automate operational and configuration tasks on network devices running Junos OS. The automation tools, which leverage the native XML capabilities of the Junos OS, include commit scripts, operation (op) scripts, event policies and event scripts, and macros.



**NOTE:** Event policies and event scripts are not supported on the QFabric system at this time.

The QFabric system supports Junos OS automation scripts that are written in Stylesheet Language Alternative Syntax (SLAX) version 1.0.

Commit scripts automate the commit process and enforce custom configuration rules. You can use commit scripts to generate specific errors and warnings, and customize configurations and configuration templates. When a candidate configuration is committed, it is inspected by each active commit script. If a configuration violates your custom rules



and the scripts generate an error, the commit fails. If the commit is successful, any configuration changes (both transient and permanent) are incorporated into the active configuration before it is passed to the Director software, which distributes the configuration to all applicable QFabric system components, including Node devices and Node servers.

Op scripts automate operational and troubleshooting tasks. Op scripts can be executed manually from the Junos OS CLI or NETCONF XML management protocol, or they can be called from another script.

The QFabric system supports the following automation script features:

- Commit scripts and op scripts are supported.
- Scripts written in SLAX version 1 are supported.
- Scripts are configured and deployed from the Director group. Since there is more than one Director device in a Director group, scripts must be deployed by each Director device or deployed in the shared media space.
- Scripts are stored in the shared media at this location:  
`/pbdata/mgd_shared/partition-ip/var/db/scripts`. Under this directory, commit scripts are stored in the **commit** subdirectory, and op scripts are stored in the **op** subdirectory.
- Scripts are not stored in flash memory.

#### Related Documentation

- [How Commit Scripts Work on page 5436](#)
- [How Op Scripts Work on page 5448](#)
- [Required Boilerplate for Commit Scripts on page 5447](#)
- [Required Boilerplate for Op Scripts on page 5449](#)
- [Controlling the Execution of Commit Scripts on page 5524](#)

## How Commit Scripts Work

You enable commit scripts by listing the names of one or more commit script files at the **[edit system scripts commit]** hierarchy level. These scripts contain instructions that enforce custom configuration rules. Commit scripts are invoked during the commit process before the standard Junos OS validity checks are performed.

When you perform a commit operation, Junos OS executes each script in turn, passing the information in the candidate configuration to the scripts. The script inspects the configuration, performs the necessary tests and validations, and generates a set of instructions for performing certain actions. These actions include generating error, warning, and system log messages. If errors are generated, the commit operation fails and the candidate configuration remains unchanged. This is the same behavior that occurs with standard commit errors.


Commit scripts can also generate changes to the system configuration. Because the changes are loaded before the standard validation checks are performed, they are validated for correct syntax, just like statements already present in the configuration



before the script is applied. If the syntax is correct, the configuration is activated and becomes the active, operational device configuration.

[Figure 193 on page 5437](#) shows the flow of commit script input and output.

**Figure 193: Commit Script Input and Output**

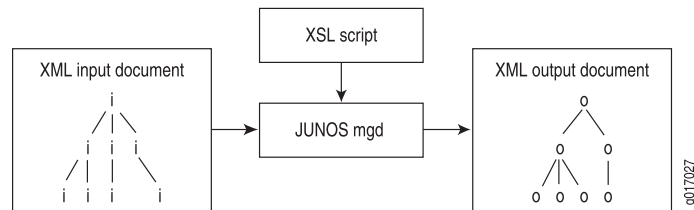

Commit scripts cannot make configuration changes to protected statements or within protected hierarchies. If a commit script attempts to modify or delete a protected statement or hierarchy, Junos OS issues a warning that the change cannot be made. Failure to modify a protected configuration element does not halt the commit script or the commit process.

The following sections discuss several important concepts related to the commit script input and output:

- [Commit Script Input on page 5437](#)
- [Commit Script Output on page 5438](#)
- [Commit Scripts and the Junos OS Commit Model on page 5439](#)

### Commit Script Input

The input for a commit script is the postinheritance candidate configuration in Junos XML API format. The term *postinheritance* means that all configuration group values have been inherited by their targets in the candidate configuration and the inactive portions of the configuration have been removed. For more information about configuration groups, see the CLI User Guide.

When you issue the **commit** command, Junos OS automatically generates the candidate configuration in XML format and reads it into the management (mgd) process, at which time the input is evaluated by any commit scripts.

To display the XML format of the postinheritance configuration, issue the **show | display commit-scripts view** command:

```
[edit]
user@host# show | display commit-scripts view
```

To display all configuration groups data, including script-generated changes to the groups, issue the **show groups | display commit-scripts** command:

```
[edit]
user@host# show groups | display commit-scripts
```

To save the commit script input to a file, add the **save** command to the command line:

```
[edit]
user@host# show | display commit-scripts view | save filename.xml
```



By default, the file is placed in your home directory on the switch, router, or security device.

### Commit Script Output

---

To specify the desired commit script output—including warning, error, and system log messages, persistent changes, and transient changes—the script can contain tags that appear in any order, in any number. The tags for specifying output are as follows:

- **<xnm:warning>**—Generates a warning message
- **<xnm:error>**—Generates an error message.
- **<syslog> <message>**—Generates a system log message.
- **<change>**—Generates a persistent change to the configuration.
- **<transient-change>**—Generates a transient change to the configuration.
- **<xsl:call-template name="jcs:emit-change">**  
    **<xsl:with-param name="content">**—Generates a persistent change relative to the current context node as defined by an XPath expression.
- **<xsl:call-template name="jcs:emit-change">**  
    **<xsl:with-param name="tag" select="transient-change"/>**  
    **<xsl:with-param name="content">**—Generates a transient change relative to the current context node as defined by an XPath expression.
- **<xsl:call-template name="jcs:emit-change">**  
    **<xsl:with-param name="message">**  
    **<xsl:text>**—Generates a warning message in conjunction with a configuration change. You can use this set of tags to generate a notification that the configuration has been changed.

Junos OS processes this output and performs the appropriate actions. Errors and warnings are passed back to the Junos OS CLI or to a Junos XML protocol client application. The presence of an error automatically causes the commit operation to fail. Persistent and transient changes are loaded into the appropriate configuration database.

To test the output of error, warning, and system log messages from commit scripts, issue the **commit check | display xml** command:

```
[edit]
user@host# commit check | display xml
```

To display a detailed trace of commit script processing, issue the **commit check | display detail** command:

```
[edit]
user@host# commit check | display detail
```



**NOTE:** System log messages do not appear in the trace output, so you cannot use the commit check operation to test script-generated system log messages. Furthermore, system log messages are written to the system log during a commit operation, but not during a commit check operation.

---



- Related Documentation**
- Example: Protecting the Junos OS Configuration from Modification or Deletion.
  - jcs:emit-change Template

### Commit Scripts and the Junos OS Commit Model

Junos OS uses a commit model to update the device's configuration. This model allows you to make a series of changes to a candidate configuration without affecting the operation of the device. When the changes are complete, you can commit the configuration. The commit operation saves the candidate configuration changes into the current configuration.


When you commit a set of changes in the candidate configuration, two methods are used to forward these changes to the current configuration:

- Standard commit model—Used when no commit scripts are active on the device.
- Commit script model—Incorporates commit scripts into the commit model.

#### Standard Commit Model

In the standard commit model, the management (mgd) process validates the candidate configuration based on standard Junos validation rules. If the configuration file is valid, it becomes the current active configuration. [Figure 194 on page 5439](#) and the accompanying discussion explain how the standard commit model works:

**Figure 194: Standard Commit Model**

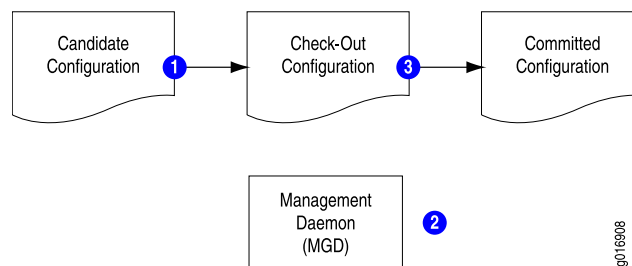

In the standard commit model, the software performs the following steps:

1. When the candidate configuration is committed, it is copied to become the checkout configuration.
2. The mgd process validates the checkout configuration.
3. If no error occurs, the checkout configuration is copied as the current active configuration.


#### Commit Model with Commit Scripts

When commit scripts are added to the standard commit model, the process becomes more complex. The mgd process first passes an XML-formatted checkout configuration to a script driver, which handles the verification of the checkout configuration by the commit scripts. When verification is complete, the script driver returns an XML *action file* to the mgd process. The mgd process follows the instructions in the action file to update



the candidate and checkout configurations, issue messages to the CLI, and write information to the system log as required. After processing the action file, the mgd process performs the standard Junos OS validation. [Figure 195 on page 5440](#) and the accompanying discussion explain this process.

**Figure 195: Commit Model with Commit Scripts Added**

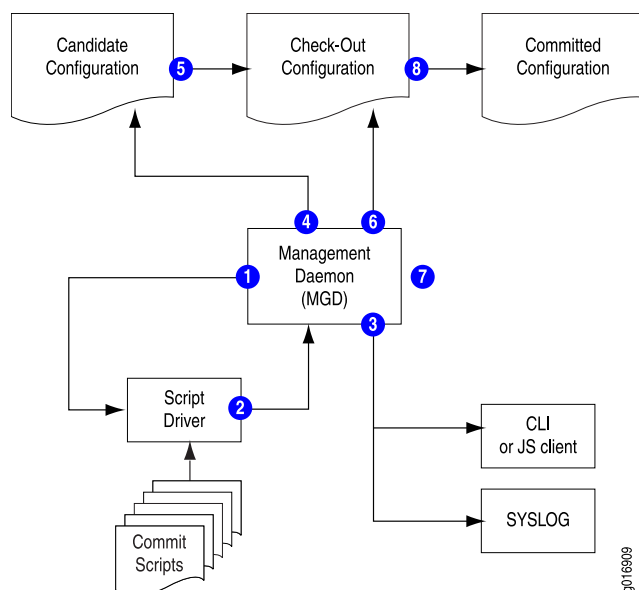

In the commit script model, Junos OS performs the following steps:

1. When the candidate configuration is committed, the mgd process sends the XML-formatted candidate configuration to the script driver.
2. Each enabled commit script is invoked against the candidate configuration, and each script can generate a set of actions for the mgd process to perform. The actions are collected in an XML action file.
3. The mgd process performs the following actions in response to **<error>**, **<warning>**, and **<syslog>** tag elements in the action file:
  - **<error>**—The mgd process halts the commit process (that is, the commit operation fails), returns an error message to the CLI or Junos XML protocol client, and takes no further action.
  - **<warning>**—The mgd process forwards the message to the CLI or the Junos XML protocol client.
  - **<syslog>**—The mgd process forwards the message to the system log process.
4. If the action file includes any **<change>** tag elements, the mgd process loads the requested changes into the candidate configuration.
5. The candidate configuration is copied to become the checkout configuration.
6. If the action file includes any **<transient-change>** tag elements, the mgd process loads the requested changes into the checkout configuration.



7. The mgd process validates the checkout configuration.
8. If there are no validation errors, the checkout configuration is copied to become the current active configuration.



**NOTE:** Commit scripts cannot make configuration changes to protected statements or within protected hierarchies. If a commit script attempts to modify or delete a protected statement or hierarchy, Junos OS issues a warning that the change cannot be made. Failure to modify a protected configuration element does not halt the commit script or the commit process.

Changes that are made to the candidate configuration during the commit operation are not evaluated by the custom rules during that commit operation. However, persistent changes are maintained in the candidate configuration and are evaluated by the custom rules during subsequent commit operations. For more information about how commit scripts change the candidate configuration, see [“Avoiding Potential Conflicts When Using Multiple Commit Scripts” on page 5441](#).

Transient changes are never evaluated by the custom rules in commit scripts, because they are made to the checkout configuration only after the commit scripts have evaluated the candidate configuration and the candidate is copied to become the checkout configuration. To remove a transient change from the configuration, remove, disable, or deactivate the commit script (as discussed in [Controlling Execution of Commit Scripts During Commit Operations](#)), or comment out the code that generates the transient change.

For more information about differences between persistent and transient changes, see [“Overview of Generating Persistent or Transient Configuration Changes” on page 5442](#).

**Related  
Documentation**


- [Avoiding Potential Conflicts When Using Multiple Commit Scripts on page 5441](#)

## Avoiding Potential Conflicts When Using Multiple Commit Scripts

When you use multiple commit scripts, each script evaluates the original candidate configuration file. Changes made by one script are not evaluated by the other scripts. This means that conflicts between scripts might not be resolved when the scripts are first applied to the configuration. The commit scripts are executed in the order they are listed at the `[edit system scripts commit]` hierarchy level, as illustrated in [Figure 196 on page 5442](#).



Figure 196: Configuration Evaluation by Multiple Commit Scripts

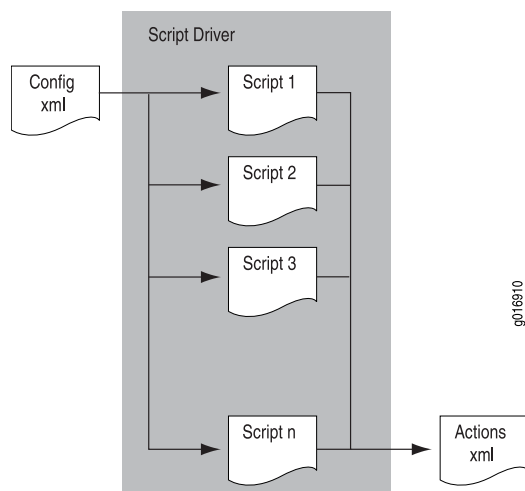

As an example of a conflict between commit scripts, suppose that commit script **A.xsl** is created to ensure that the device uses the domain name server with IP address 192.168.0.255. Later, the DNS server's address is changed to 192.168.255.255 and a second script, **B.xsl**, is added to check that the device uses the DNS server with that address. However, script **A.xsl** is not removed or disabled.

Because each commit script evaluates the original candidate configuration, the final result of executing both scripts **A.xsl** and **B.xsl** depends on which DNS server address is configured in the original candidate configuration. If the now outdated address of 192.168.0.255 is configured, script **B.xsl** changes it to 192.168.255.255. However, if the correct address of 192.168.255.255 is configured, script **A.xsl** changes it to the incorrect value 192.168.0.255.

As another example of a potential conflict between commit scripts, suppose that a commit script protects a hierarchy using the **protect** attribute. If a second commit script attempts to modify or delete the hierarchy or the statements within the hierarchy, Junos OS issues a warning during the commit process and prevents the configuration change.

Exercise care to ensure that you do not introduce conflicts between scripts like those described in the examples. As a method of checking for conflicts with persistent changes, you can issue two separate **commit** commands.

**Related Documentation**

- [How Commit Scripts Work on page 5436](#)

## Overview of Generating Persistent or Transient Configuration Changes

Junos OS commit scripts enforce custom configuration rules. When a candidate configuration includes statements that you have decided must not be included in your configuration, or when the candidate configuration omits statements that you have



decided are required, commit scripts can automatically change the configuration and thereby correct the problem.

- [Differences Between Persistent and Transient Changes on page 5443](#)
- [Interaction of Configuration Changes and Configuration Groups on page 5446](#)
- [Tag Elements and Templates for Generating Changes on page 5446](#)

### Differences Between Persistent and Transient Changes

---

Configuration changes made by commit scripts can be *persistent* or *transient*.

A persistent change remains in the candidate configuration and affects routing operations until you explicitly delete it, even if you subsequently remove or disable the commit script that generated the change and reissue the **commit** command. In other words, removing the commit script does not cause a persistent change to be removed from the configuration.

A transient change, in contrast, is made in the *checkout configuration* but not in the candidate configuration. The checkout configuration is the configuration database that is inspected for standard Junos OS syntax just before it is copied to become the active configuration on the device. If you subsequently remove or disable the commit script that made the change and reissue the **commit** command, the change is no longer made to the checkout configuration and so does not affect the active configuration. In other words, removing the commit script effectively removes a transient change from the configuration.

A common use for transient changes is to eliminate the need to repeatedly configure and display well-known policies, thus allowing these policies to be enforced implicitly. For example, if MPLS must be enabled on every interface with an International Organization for Standardization (ISO) protocol enabled, the change can be transient, so that the repetitive or redundant configuration data need not be carried or displayed in the candidate configuration. Furthermore, transient changes allow you to write script instructions that apply the change only if a set of conditions is met.

Persistent and transient changes are loaded into the configuration in the same manner that the **load replace** configuration mode command loads an incoming configuration. When generating a persistent or transient change, adding the **replace="replace"** attribute to a configuration element produces the same behavior as a **replace:** tag in a **load replace** operation.

By default, Junos OS merges the incoming configuration and the candidate configuration. New statements and hierarchies are added, and conflicting statements are overridden. When generating a persistent or transient change, if you add the **replace="replace"** attribute to a configuration element, Junos OS replaces the existing configuration element with the incoming configuration element. If the **replace="replace"** attribute is added to a configuration element, but there is no existing element of the same name in the current configuration, the incoming configuration element is added into the configuration. Elements that do not have the **replace** attribute are merged into the configuration.

Persistent and transient changes are loaded before the standard Junos validation checks are performed. This means any configuration changes introduced by a commit script are



validated for correct syntax. If the syntax is correct, the new configuration becomes the active, operational device configuration.

Protected elements in the configuration hierarchy cannot be modified or deleted by either a persistent or a transient change. If a commit script attempts to modify or delete a protected statement or hierarchy, Junos OS issues a warning that the change cannot be made, and proceeds with the commit.

Persistent and transient changes have several important differences, as described in [Table 473 on page 5444](#).

**Table 473: Differences Between Persistent and Transient Changes**

| Persistent Changes                                                                                                                                                                                                                                                                                                                                           | Transient Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>A persistent change is represented in a commit script by the <b>&lt;change&gt;</b> tag.</p> <p>Another way to represent a persistent change is with the <b>content</b> parameter inside a call to the <b>jcs:emit-change</b> template.</p> <p>The <b>jcs:emit-change</b> template is a helper template contained in the <b>junos.xsl</b> import file.</p> | <p>A transient change is represented in a commit script by the <b>&lt;transient-change&gt;</b> tag.</p> <p>Another way to represent a transient change is to use the <b>content</b> parameter and the <b>tag transient</b> parameter inside a call to the <b>jcs:emit-change</b> template.</p>                                                                                                                                                                                                                                                                                                                                                                                                              |
| <p>You can use persistent changes to perform any Junos XML protocol operation, such as activate, deactivate, delete, insert (reorder), comment (annotate), and replace sections of the configuration.</p>                                                                                                                                                    | <p>Like persistent changes, you can use transient changes to perform any Junos XML protocol operation. However, some Junos XML protocol operations do not make sense to use with transient changes, such as generating comments and inactive settings.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <p>Persistent changes are always loaded during the commit process if no errors are generated by any commit scripts or by the standard Junos OS validity check.</p>                                                                                                                                                                                           | <p>For transient changes to be loaded, you must include the <b>allow-transients</b> statement at the <b>[edit system scripts commit]</b> hierarchy level. If you enable a commit script that generates transient changes and you do not include the <b>allow-transients</b> statement in the configuration, the CLI generates an error message and the commit operation fails.</p> <p>Like persistent changes, transient changes must pass the standard Junos OS validity check.</p> <p>You cannot use a commit script to generate the <b>allow-transients</b> statement at the <b>[edit system scripts commit]</b> hierarchy level. Rather, you must include this statement directly by using the CLI.</p> |



Table 473: Differences Between Persistent and Transient Changes (*continued*)

| Persistent Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Transient Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Persistent changes work like the <b>load replace</b> configuration mode command, and the change is added to the candidate configuration.</p> <p>When generating a persistent change, if you add the <b>replace="replace"</b> attribute to a configuration element, Junos OS replaces the existing element in the candidate configuration with the incoming configuration element. If there is no existing element of the same name in the candidate configuration, the incoming configuration element is added into the configuration. Elements that do not have the <b>replace</b> attribute are merged into the configuration.</p> | <p>Transient changes work like the <b>load replace</b> configuration mode command, and the change is added to the checkout configuration.</p> <p>When generating a transient change, if you add the <b>replace="replace"</b> attribute to a configuration element, Junos OS replaces the existing element in the checkout configuration with the incoming configuration element. If there is no existing element of the same name in the checkout configuration, the incoming configuration element is added into the configuration. Elements that do not have the <b>replace</b> attribute are merged into the configuration.</p> <p>Transient changes are not copied to the candidate configuration. For this reason, transient changes are not saved in the configuration if the associated commit script is deleted or deactivated.</p> |
| <p>After a persistent change is committed, the software treats it like a change you make by directly editing and committing the candidate configuration.</p> <p>After the persistent changes are copied to the candidate configuration, they are copied to the checkout configuration. If the changes pass the standard Junos OS validity checks, the changes are propagated to the switch, router, or security device components.</p>                                                                                                                                                                                                  | <p>Each time a transient change is committed, the software updates the checkout configuration database. After the transient changes pass the standard Junos OS validity checks, the changes are propagated to the device components.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <p>After committing a script that causes a persistent change to be generated, you can view the persistent change by issuing the <b>show</b> configuration mode command:</p> <pre>user@host# show</pre> <p>This command displays persistent changes only, not transient changes.</p>                                                                                                                                                                                                                                                                                                                                                     | <p>After committing a script that causes a transient change to be generated, you can view the transient change by issuing the <b>show   display commit-scripts</b> configuration mode command:</p> <pre>user@host# show   display commit-scripts</pre> <p>This command displays both persistent and transient changes.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <p>Persistent changes must conform to your custom configuration design rules as dictated by commit scripts.</p> <p>This does not become apparent until after a second commit operation because persistent changes are not evaluated by commit script rules on the current commit operation. The subsequent commit operation fails if the persistent changes do not conform to the rules imposed by the commit scripts configured during the first commit operation.</p>                                                                                                                                                                 | <p>Transient changes are never tested by and do not need to conform to your custom rules. This is caused by the order of operations in the Junos OS commit model, which is explained in detail in <a href="#">“Commit Scripts and the Junos OS Commit Model” on page 5439</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <p>A persistent change remains in the configuration even if you delete, disable, or deactivate the commit script instructions that generated the change.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <p>If you delete, disable, or deactivate the commit script instructions that generate a transient change, the change is removed from the configuration after the next commit operation. In short, if the associated instructions or the entire commit script is removed, the transient change is also removed.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |



Table 473: Differences Between Persistent and Transient Changes (*continued*)

| Persistent Changes                                                                                                                                                                                                                                                                                                                                                                                                                       | Transient Changes                                                                                                                                                                                                                                                                              |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| As with direct CLI configuration, you can remove a persistent change by rolling back to a previous configuration that did not include the change and issuing the <b>commit</b> command. However, if you do not disable or deactivate the associated commit script, and the problem that originally caused the change to be generated still exists, the change is automatically regenerated when you issue another <b>commit</b> command. | You cannot remove a transient change by rolling back to a previous configuration.                                                                                                                                                                                                              |
| You can alter persistent changes directly by editing the configuration using the CLI.                                                                                                                                                                                                                                                                                                                                                    | <p>You cannot directly alter or delete a transient change by using the Junos OS CLI, because the change is not in the candidate configuration.</p> <p>To alter the contents of a transient change, you must alter the statements in the commit script that generates the transient change.</p> |

### Interaction of Configuration Changes and Configuration Groups

Any configuration change you can make by directly editing the configuration using the Junos OS command-line interface (CLI) can also be generated by a commit script as a persistent or transient change. This includes values specified at a specific hierarchy level or in configuration groups. As with direct CLI configuration, values specified in the *target* override values inherited from a configuration group. The target is the statement to which you apply a configuration group by including the **apply-groups** statement.

If you define persistent or transient changes as belonging to a configuration group, the configuration groups are applied in the order you specify in the **apply-groups** statements, which you can include at any hierarchy level except the top level. You can also disable inheritance of a configuration group by including the **apply-groups-except** statement at any hierarchy level except the top level.



**CAUTION:** Each commit script inspects the postinheritance view of the configuration. If a candidate configuration contains a configuration group, be careful when using a commit script to change the related target configuration, because doing so might alter the intended inheritance from the configuration group.

Also be careful when using a commit script to change a configuration group, because the configuration group might be generated by an application that performs a load replace operation on the group during each commit operation.

For more information about configuration groups, see the CLI User Guide.

### Tag Elements and Templates for Generating Changes

To generate changes, you can use the **jcs:emit-change** template, which implicitly includes **<change>** and **<transient-change>** XML elements; or you can explicitly include **<change>**



and `<transient-change>` XML elements. Using the `jcs:emit-change` template allows you to set the hierarchical context of the change once rather than multiple times.

The `<change>` and `<transient-change>` elements are similar to the `<load-configuration>` operation defined by the Junos XML management protocol. The possible contents of the `<change>` and `<transient-change>` elements are the same as the contents of the `<configuration>` tag element used in the Junos XML protocol operation `<load-configuration>`. For complete details about the `<load-configuration>` element, see the *Junos XML Management Protocol Guide*.

## Required Boilerplate for Commit Scripts

When you write commit scripts, you use Extensible Stylesheet Language Transformations (XSLT) or Stylesheet Language Alternative Syntax (SLAX) tools provided with Junos OS. These tools include basic boilerplate that you must include in all commit scripts, optional extension functions that accomplish scripting tasks more easily, and named templates that make commit scripts easier to read and write, which you import from a file called `junos.xsl`. For more information about the extension functions and templates, see *Junos Script Automation: Understanding Extension Functions in the jcs and slax Namespaces* and *Junos Script Automation: Named Templates in the jcs Namespace Overview*.

Commit scripts are based on Junos XML and Junos XML protocol tag elements. Like all XML elements, angle brackets enclose the name of a Junos XML or Junos XML protocol tag element in its opening and closing tags. This is an XML convention, and the brackets are a required part of the complete tag element name. They are not to be confused with the angle brackets used in the documentation to indicate optional parts of Junos OS CLI command strings.

You must include either XSLT or SLAX boilerplate as the starting point for all commit scripts that you create. The XSLT boilerplate follows:

### XSLT Boilerplate for Commit Scripts

```

1  <?xml version="1.0" standalone="yes"?>
2  <xsl:stylesheet version="1.0"
3    xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
4    xmlns:junos="http://xml.juniper.net/junos/*/junos"
5    xmlns:xnm="http://xml.juniper.net/xnm/1.1/xnm"
6    xmlns:jcs="http://xml.juniper.net/junos/commit-scripts/1.0">
7    <xsl:import href="../../../import/junos.xsl"/>

8    <xsl:template match="configuration">
9      <!-- ... Insert your code here ... -->
10   </xsl:template>
11 </xsl:stylesheet>
```

Line 1 is the Extensible Markup Language (XML) processing instruction (PI). This PI specifies that the code is written in XML using version 1.0. The XML PI, if present, must be the first noncomment token in the script file.

```
1  <?xml version="1.0"?>
```



Lines 2 through 6 set the style sheet element and the associated namespaces. Line 2 sets the style sheet version as 1.0. Lines 3 through 6 list all the namespace mappings commonly used in commit scripts. Not all of these prefixes are used in this example, but it is not an error to list namespace mappings that are not referenced. Listing all namespace mappings prevents errors if the mappings are used in later versions of the script.

```
2 <xsl:stylesheet version="1.0"
3   xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
4   xmlns:junos="http://xml.juniper.net/junos/*/junos"
5   xmlns:xnm="http://xml.juniper.net/xnm/1.1/xnm"
6   xmlns:jcs="http://xml.juniper.net/junos/commit-scripts/1.0">
```

Line 7 is an XSLT import statement. It loads the templates and variables from the file referenced as `../import/junos.xsl`, which ships as part of the Junos OS. The `junos.xsl` file contains a set of named templates you can call in your scripts. These named templates are discussed in *Junos Script Automation: Named Templates in the jcs Namespace Overview* and *Junos Named Templates in the jcs Namespace Summary*.

```
7 <xsl:import href="../import/junos.xsl"/>
```

Line 8 defines a template that matches the `<configuration>` element, which is the node selected by the `<xsl:template match="/">` template, contained in the `junos.xsl` import file. The `<xsl:template match="configuration">` element allows you to exclude the `/configuration/` root element from all XML Path Language (XPath) expressions in the script and begin XPath expressions with the top Junos OS hierarchy level. For more information, see *XPath Overview*.

```
8 <xsl:template match="configuration">
```

Add your code between Lines 8 and 9.

Line 9 closes the template.

```
9 </xsl:template>
```

Line 10 closes the style sheet and the commit script.

```
10 </xsl:stylesheet>
```

### SLAX Boilerplate for Commit Scripts

The corresponding SLAX boilerplate is as follows:

```
version 1.0;
ns junos = "http://xml.juniper.net/junos/*/junos";
ns xnm = "http://xml.juniper.net/xnm/1.1/xnm";
ns jcs = "http://xml.juniper.net/junos/commit-scripts/1.0";
import "../import/junos.xsl";

match configuration {
/*
* Insert your code here
*/
}
```

## How Op Scripts Work

Op scripts execute Junos OS operational commands and inspect the resulting output. After inspection, op scripts can automatically correct errors within the device running Junos OS based on this output.




You add op scripts to device operations by listing the filenames of one or more op script files within the **[edit system scripts op]** hierarchy level. These files must be added to the appropriate op script file directory. For more information about op script file directories, see *Storing Scripts in Flash Memory*. Once added to the device, op scripts are invoked from the command line, using the **op filename** command.

You can use op scripts to generate changes to the device configuration by including the **<load-configuration>** tag element. Because the changes are loaded before the standard validation checks are performed, they are validated for correct syntax, just like statements already present in the configuration before the script is applied. If the syntax is correct, the configuration is activated and becomes the active, operational device configuration.

Figure 197 on page 5449 shows a high-level view of the flow of op script input and output.

**Figure 197: Op Script Input and Output**

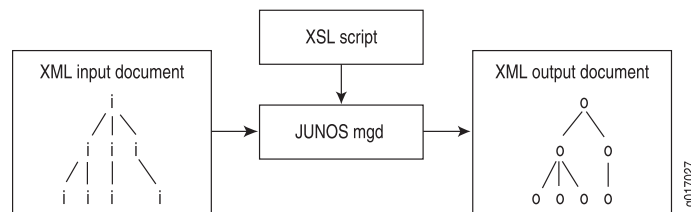

## Required Boilerplate for Op Scripts

When you write operation (op) scripts, you use Extensible Stylesheet Language Transformations (XSLT) or Stylesheet Language Alternative Syntax (SLAX) tools provided with Junos OS. These tools include basic boilerplate that you must include in all op scripts, optional extension functions that accomplish scripting tasks more easily, and named templates that make scripts easier to read and write, which you import from a file called **junos.xml**. For more information about the extension functions and templates, see *Junos Script Automation: Understanding Extension Functions in the jcs and slax Namespaces* and *Junos Script Automation: Named Templates in the jcs Namespace Overview*.

Op scripts are based on Junos XML and Junos XML protocol tag elements. Like all XML elements, angle brackets enclose the name of a Junos XML or Junos XML protocol tag element in its opening and closing tags. This is an XML convention, and the brackets are a required part of the complete tag element name. They are not to be confused with the angle brackets used in the documentation to indicate optional parts of Junos OS CLI command strings.

You must include either XSLT or SLAX boilerplate as the starting point for all op scripts that you create. The XSLT boilerplate follows:

### XSLT Boilerplate for Op Scripts

```

1 <?xml version="1.0" standalone="yes"?>
2 <xsl:stylesheet version="1.0"
3   xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
4   xmlns:junos="http://xml.juniper.net/junos/*/junos"
5   xmlns:xnm="http://xml.juniper.net/xnm/1.1/xnm"
6   xmlns:jcs="http://xml.juniper.net/junos/commit-scripts/1.0">
7   <xsl:import href="../import/junos.xml"/>
8   <xsl:template match="/">

```



```
9      <op-script-results>
      <!-- ... insert your code here ... -->
10     </op-script-results>
11   </xsl:template>
      <!-- ... insert additional template definitions here ... -->
12 </xsl:stylesheet>
```

Line 1 is the Extensible Markup Language (XML) processing instruction (PI), which marks this file as XML and specifies the version of XML as 1.0. The XML PI, if present, must be the first non-comment token in the script file.

```
1 <?xml version="1.0"?>
```

Line 2 opens the style sheet and specifies the XSLT version as 1.0.

```
2 <xsl:stylesheet version="1.0"
```

Lines 3 through 6 list all the namespace mappings commonly used in operation scripts. Not all of these prefixes are used in this example, but it is not an error to list namespace mappings that are not referenced. Listing all namespace mappings prevents errors if the mappings are used in later versions of the script.

```
3   xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
4   xmlns:junos="http://xml.juniper.net/junos/*/junos"
5   xmlns:xnm="http://xml.juniper.net/xnm/1.1/xnm"
6   xmlns:jcs="http://xml.juniper.net/junos/commit-scripts/1.0">
```

Line 7 is an XSLT import statement. It loads the templates and variables from the file referenced as `../import/junos.xsl`, which ships as part of Junos OS (in the file `/usr/libdata/cscript/import/junos.xsl`). The `junos.xsl` file contains a set of named templates you can call in your scripts. These named templates are discussed in Junos Script Automation: Named Templates in the jcs Namespace Overview and Junos Named Templates in the jcs Namespace Summary.

```
7   <xsl:import href="../import/junos.xsl"/>
```

Line 8 defines a template that matches the `</>` element. The `<xsl:template match="/">` element is the root element and represents the top level of the XML hierarchy. All XML Path Language (XPath) expressions in the script must start at the top level. This allows the script to access all possible Junos XML and Junos XML protocol remote procedure calls (RPCs). For more information, see XPath Overview.

```
8   <xsl:template match="/">
```

After the `<xsl:template match="/">` tag element, the `<op-script-results>` and `</op-script-results>` container tags must be the top-level child tags, as shown in Lines 9 and 10.

```
9      <op-script-results>
      <!-- ... insert your code here ... -->
10     </op-script-results>
```

Line 11 closes the template.

```
11   </xsl:template>
```

Between Line 11 and Line 12, you can define additional XSLT templates that are called from within the `<xsl:template match="/">` template.



Line 12 closes the style sheet and the op script.

```
12 </xsl:stylesheet>
```

### SLAX Boilerplate for Op Scripts

The corresponding SLAX boilerplate is as follows:

```
version 1.0;

ns junos = "http://xml.juniper.net/junos/*/junos";
ns xnm = "http://xml.juniper.net/xnm/1.1/xnm";
ns jcs = "http://xml.juniper.net/junos/commit-scripts/1.0";
import "../import/junos.xsl";

match / {
  <op-script-results> {
    /*
     * Insert your code here
     */
  }
}
```

## Fabric OAM

- [Overview of Internal Fabric Monitoring on page 5451](#)

### Overview of Internal Fabric Monitoring

Internal fabric monitoring is a feature of the Operation, Administration, and Maintenance (OAM) of the QFabric system. This feature enables you to validate the flow path of protocol data units (PDUs) across a given VLAN on the QFabric system using the unicast ping, multicast ping, and traceroute operations.

Internal fabric monitoring is useful for fault detection on the QFabric system. For example, if a PDU reaches a destination that is not part of the VLAN configuration, the operation (unicast ping, multicast ping, or traceroute) displays the exception on the console at runtime.

The unicast and multicast ping operations send PDUs from a source interface (called the source fabric maintenance endpoint [FMEP]) to a destination FMEP. The destination FMEP sends a response to the source FMEP when the PDUs are received.

The traceroute operation, also called a flow linktrace, traces the path taken by a specific, learned unicast flow from a source FMEP to a destination FMEP in a VLAN. The source and destination FMEPs may be on the same Node device, different Node devices connected to the same Interconnect device, or different Node devices connected to different Interconnect devices. The flow path is the sequence of Packet Forwarding Engine forwarding hops along which the PDU travels. The hop-by-hop sequence and number of hops are reported in terms of fabric maintenance intermediate points (FMIPs), which are interfaces on the Packet Forwarding Engine of the Interconnect device. An FMIP sends a response to the source FMEP when the traceroute PDU is received.

The following internal fabric monitoring commands are supported:



- **show oam fabric flow specification**
- **show oam fabric interfaces**
- **ping fabric unicast-flow**
- **ping fabric multicast-flow**
- **traceroute fabric unicast-flow**

The following are the main components of the internal fabric monitoring feature:

- **FMEP**—Represents the source or destination point (endpoint) in the monitoring operations. An FMEP is an interface through which PDUs are sent (source FMEP) or received (destination FMEP). Upon receipt of the PDUs, the destination FMEP sends a response to the source FMEP to validate the monitoring flow. FMEPs are associated with a VLAN in the fabric maintenance association (FMA) configuration, and the source and destination FMEP addresses are configured in the flow specification.
- **FMA**—Associates a set of FMEPs with a VLAN. The FMA defines the VLAN and FMEP parameters, including the VLAN name, FMEP identifiers, FMEP names, and the interface names of the FMEPs. The FMEPs defined in the FMA are the source and destination FMEPs used in the monitoring commands.



**NOTE:** A default FMA is automatically created for each Node group in the QFabric system. The default FMA is used to send error response PDUs (for example, in the case of a VLAN leak) and responses to PDUs that are not mapped to a specific interface in the QFabric system.

---

- **Flow specification**—Configures the flow type and FMEP addressing parameters. Unicast flow types include an Ethernet type (other than IPv4) and Ethernet IPv4. Multicast flow types include the Ethernet IPv4 and VLAN flood type. The flow specification also defines parameters within each flow type, such as MAC or IPv4 addresses of the source and destination FMEPs. The names and identifiers of these FMEPs are configured in the FMA parameters.

To enable internal fabric monitoring, configure the **fabric-maintenance-associations** and **flow-specs** statements at the **[edit protocols oam fabric]** hierarchy level.

The **ping fabric unicast-flow**, **ping fabric multicast-flow**, and **traceroute fabric unicast-flow** commands require that you specify the flow specification and FMA names, as well as the source and destination FMEP names.

#### Related Documentation

- [Configuring a Fabric Maintenance Association on page 5527](#)
- [Configuring Flow Specifications on page 5528](#)
- [fabric \(OAM\) on page 5599](#)
- [ping fabric multicast-flow on page 5757](#)
- [ping fabric unicast-flow on page 5759](#)
- [traceroute fabric unicast-flow on page 5806](#)



---

## Junos Space

---

- [Understanding Junos Space Support on page 5453](#)
- [Preparing the Device for Junos Space Management on page 5456](#)

### Understanding Junos Space Support

The Juniper Networks Junos Space application, running on a JA1500 appliance or a Junos Space Virtual Appliance, is a comprehensive platform for building and deploying applications for collaboration, productivity, and network infrastructure and operations management. Junos Space provides a runtime environment implemented as a fabric of virtual and physical appliances.

The Junos Space software comprises various applications for network management and configuration. Starting with Junos Space Release 11.1, the following Junos Space applications provide support for the QFX Series devices:

- Network Application Platform (Platform) automates network management operations, including device discovery and management, device templates for configuration, scripts management, image management, and SSH secure console.
- Ethernet Design provides tools to simultaneously configure and manage multiple Junos OS devices within a network. You can manage and customize port profiles, and apply port profiles to your devices.
- Service Now enables you to display and manage information about problem events. When problems are detected on the device by Advanced Insight Scripts (AI-Scripts) that are installed on the device, the data is collected and sent to Service Now for your review and action. This application is available only if you have a Juniper Networks service contract.
- Service Insight provides proactive support in accelerating operational analysis and managing the exposure to known issues. You can identify devices that are nearing their end of life (EOL) and also discover and prevent issues that could occur in your network. The functionality of Service Insight is dependent on the information sent from Service Now. This application is available only if you have a Juniper Networks service contract.
- Virtual Control is a web-based solution that enables you to manage virtual networks deployed in virtualized environments in data centers. It provides a single management interface for you to monitor and control the virtual and physical elements of the virtual environment.
- IBM Systems Director and Junos Space Launch in Context (LiC) integrate the IBM Systems Director and Junos Space software to manage Juniper Networks devices.

For more information about Junos Space, go to:

[http://www.juniper.net/techpubs/en\\_US/release-independent/junos-space/](http://www.juniper.net/techpubs/en_US/release-independent/junos-space/)





**NOTE:** Before you can perform the tasks listed in [Table 474 on page 5454](#), you must first ensure the configuration on the device meets the requirements for device discovery in Junos Space. For more information, see [“Preparing the Device for Junos Space Management” on page 5456](#).

[Table 474 on page 5454](#) lists some device and network management tasks you can perform in Junos Space.

**Table 474: Device and Network Management Tasks in Junos Space**

| Task                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Application Workspace Task                                                      | Documentation                                                                                                                                                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Set up and manage user access                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>Platform &gt; Administration &gt; Users &gt; Create User</b>                 | <i>Junos Space Network Application Platform User Guide</i>                                                                                                                                             |
| Bring the device under Junos Space management (device discovery)<br><br><b>NOTE:</b> Before the device can be discovered in Junos Space, the following requirements must be met: <ul style="list-style-type: none"> <li>• The device configuration has a static management IP address that is reachable from the Junos Space server.</li> <li>• There is a user with full administrative privileges for Junos Space administration.</li> <li>• If you plan on using SNMP to probe devices as part of device discovery, SNMP is enabled with appropriate read-only v1/v2c/v3 credentials.</li> </ul> | <b>Platform &gt; Devices &gt; Discover Devices</b>                              | <ul style="list-style-type: none"> <li>• <a href="#">Preparing the Device for Junos Space Management on page 5456</a></li> <li>• <i>Junos Space Network Application Platform User Guide</i></li> </ul> |
| View the hardware inventory or status of physical interfaces on the device                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>Platform &gt; Devices &gt; Manage Devices</b>                                | <i>Junos Space Network Application Platform User Guide</i>                                                                                                                                             |
| Upload Junos OS software image, deploy the image on the device, and manage device images                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <b>Platform &gt; Device Images &gt; Manage Images</b>                           |                                                                                                                                                                                                        |
| Edit the configuration of a managed device                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>Platform &gt; Devices &gt; Manage Devices &gt; Edit Device Configuration</b> | <i>Junos Space Network Application Platform User Guide</i>                                                                                                                                             |



Table 474: Device and Network Management Tasks in Junos Space (*continued*)

| Task                                                                                          | Application Workspace Task                                                                                               | Documentation                                                       |
|-----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| Design a device template definition for configuring the device                                | <b>Platform &gt; Device Templates &gt; Manage Definitions</b>                                                            | <i>Junos Space Network Application Platform User Guide</i>          |
| Centrally configure one or more devices by deploying a device template                        | <b>Platform &gt; Device Templates &gt; Manage Templates</b>                                                              | <i>Junos Space Network Application Platform User Guide</i>          |
| Manage device management interface (DMI) schemas                                              | <b>Platform &gt; Administration &gt; Manage DMI Schemas</b>                                                              | <i>Junos Space Network Application Platform User Guide</i>          |
| Import, modify, and deploy Junos OS scripts                                                   | <b>Platform &gt; Scripts &gt; Manage Scripts</b>                                                                         | <i>Junos Space Network Application Platform User Guide</i>          |
| Access the device remotely using a secure console                                             | <b>Platform &gt; Devices &gt; Secure Console</b>                                                                         | <i>Junos Space Network Application Platform User Guide</i>          |
| Create and manage QFabric system Node groups                                                  | <b>Ethernet Design &gt; EZ Design &gt; Manage QFabric Node Groups</b>                                                    | <i>Ethernet Design User Guide</i>                                   |
| Provision a port or port group using a port profile                                           | <b>Ethernet Design &gt; EZ Design &gt; Port Profile or Ethernet Design &gt; EZ Design &gt; Manage Fabric Port Groups</b> | <i>Ethernet Design User Guide</i>                                   |
| View incident reports and submit a case to Juniper Networks support                           | <b>Service Now &gt; Service Central &gt; Incidents</b>                                                                   | <i>Service Automation User Guide</i>                                |
| Get notification from Juniper support about known issues (Proactive Bug Notifications [PBNs]) | <b>Service Insight &gt; Insight Central &gt; Targeted PBNs</b>                                                           | <i>Service Automation User Guide</i>                                |
| Use the Virtual Control Getting Started Assistant to set up a virtual network                 | Navigate to the Virtual Control application, click the Help icon, and expand the Getting Started assistant               | <i>Virtual Control User Guide</i>                                   |
| Use IBM Systems Director to launch Junos Space and manage devices                             | <b>IBM Systems Director &gt; Navigate Resources</b>                                                                      | <i>IBM Systems Director and Junos Space Launch in Context (LIC)</i> |

**Related Documentation**

- Installing and Connecting a QFX3500 Device
- [Preparing the Device for Junos Space Management on page 5456](#)



## Preparing the Device for Junos Space Management

Before you can use the Juniper Networks Junos Space application to manage the QFX Series device, you must ensure that the configuration on the device meets the following requirements for device discovery in Junos Space:

- The device configuration has a static management IP address that is reachable from the Junos Space server.
- There is a user with full administrative privileges for Junos Space administration.
- SNMP is enabled (only if you plan on using SNMP as part of the device discovery).
- In Junos Space, set up a default device management interface (DMI) schema for the QFX Series device.

To prepare the device before using Junos Space:

1. Perform the initial configuration of the device through the console port using the Junos OS CLI. This task includes the configuration of a static management IP address and a user with root administrative privileges.

For the QFX3500 switch, see [“Configuring a QFX3500 Device as a Standalone Switch” on page 138](#).

For the QFabric system, see QFabric System Initial and Default Configuration Information and Performing the QFabric System Initial Setup on a QFX3100 Director Group.

2. (Optional) Configure SNMP if you plan on using SNMP to probe devices during device discovery.

See [“Configuring SNMP” on page 1223](#).

3. (Optional) Enable SSH if you wish to use the Secure Console feature in Junos Space.

See [“Configuring SSH Service for Remote Access to the Router or Switch” on page 1229](#).

4. In Junos Space, set up a default DMI schema by navigating to **Network Application Platform > Administration > Manage DMI Schemas**.

For more information, see “Managing DMI Schemas” in the *Junos Space Network Application Platform User Guide* at:

[http://www.juniper.net/techpubs/en\\_US/release-independent/junos-space/](http://www.juniper.net/techpubs/en_US/release-independent/junos-space/) .

---

## sFlow Technology

- [Overview of sFlow Technology on page 5456](#)

### Overview of sFlow Technology

The sFlow technology is a monitoring technology for high-speed switched or routed networks. sFlow monitoring technology collects samples of network packets and sends them in a UDP datagram to a monitoring station called a *collector*. You can configure sFlow technology on a QFX Series device to monitor traffic continuously at wire speed



on all interfaces simultaneously. You must enable sFlow monitoring on each interface individually; you cannot globally enable sFlow monitoring on all interfaces with a single configuration statement. Junos OS fully supports the sFlow technology standard described in RFC 3176, *InMon Corporation's sFlow: A Method for Monitoring Traffic in Switched and Routed Networks*.

sFlow technology implements the following two sampling mechanisms:

- **Packet-based sampling**—Samples one packet out of a specified number of packets from an interface enabled for sFlow technology. Only the first 128 bytes of each packet are sent to the collector. Data collected include the Ethernet, IP, and TCP headers, along with other application-level headers (if present). Although this type of sampling might not capture infrequent packet flows, the majority of flows are reported over time, allowing the collector to generate a reasonably accurate representation of network activity. You configure packet-based sampling when you specify a sample rate.
- **Time-based sampling**—Samples interface statistics (counters) at a specified interval from an interface enabled for sFlow technology. Statistics such as Ethernet interface errors are captured. You configure time-based sampling when you specify a polling interval.

An sFlow monitoring system consists of an sFlow agent embedded in the device and up to four external collectors. On a QFX Series standalone switch, the sFlow agent performs packet sampling and gathers interface statistics, and then combines the information into UDP datagrams that are sent to the sFlow collectors.

On a QFabric system, a distributed sFlow architecture is implemented. The sFlow agent has a separate sampling entity, known as a *subagent*, running on each Node device. Each subagent has its own independent state and forwards its own sample information (datagrams) directly to the sFlow collectors. Since sampling is distributed across subagents, the protocol overhead associated with sFlow is significantly reduced at the Routing Engine and the collectors.

The sFlow monitoring global configuration that is defined on the QFabric system Director device is distributed to Node groups that have sFlow sampling configured on the interfaces.

Regardless of the rate of traffic or the configured sampling interval, a datagram is sent whenever its size reaches the maximum Ethernet transmission unit (MTU) of 1500 bytes, or whenever a 250-ms timer expires, whichever occurs first. The timer ensures that a collector receives regularly sampled data.

Support for sFlow traffic sampling has the following limitations:

- sFlow sampling on ingress interfaces does not capture CPU-bound traffic.
- sFlow sampling on egress interfaces does not support broadcast and multicast packets.
- Egress samples do not contain modifications made to the packet in the egress pipeline.
- If a packet is discarded because of a firewall filter, the reason code for discarding the packet is not sent to the collector.
- The **out-priority** field for a VLAN is always set to 0 (zero) on ingress and egress samples.



To ensure sampling accuracy and efficiency, QFX Series devices use adaptive sFlow sampling. Adaptive sampling monitors the overall incoming traffic rate on the device and provides feedback to the interfaces to dynamically adapt their sampling rate to traffic conditions. The sFlow agent reads the statistics on the interfaces every 5 seconds and identifies five interfaces with the highest number of samples. When the CPU processing limit is reached, a binary backoff algorithm is implemented to reduce the sampling load of the top five interfaces by half. The adapted sampling rate is then applied to other interfaces.

On the QFabric system, interfaces on each Node device are monitored together as a group, and the binary backoff algorithm is implemented based on the traffic on that group of interfaces.

Using adaptive sampling prevents overloading of the CPU and keeps the device operating at its optimum level even when there is a change in traffic patterns on the interfaces. The reduced sampling rate is used until the device is rebooted or when a new sampling rate is configured.

The sFlow collector uses the IP address of the sFlow agent to determine the source of the sFlow data. You can configure the IP address of the sFlow agent to ensure that the agent ID for the sFlow agent remains constant. If you do not assign an IP address to the agent, an IP address will be assigned to the agent using the IP address of a configured interface. The following priority is used to determine which interface will be used:

1. Management Ethernet interface **me0** IP address
2. Any Layer 3 interface if the **me0** IP address is not available

If a particular interface is not configured, the IP address of the next interface in the priority list is used as the IP address for the agent. Once an IP address is assigned to the agent, the agent ID is not modified until the sFlow service is restarted. At least one interface has to be configured for an IP address to be assigned to the agent.

In addition, you can explicitly configure the IP address for the source data (sFlow datagrams). If you do not configure that address, the following priority is used:

- Any Layer 3 interface IP address
- The **me0** IP address if no Layer 3 interface IP address is available

**Related  
Documentation**

- [Example: Monitoring Network Traffic Using sFlow Technology on page 5514](#)
- [Configuring sFlow Technology on page 5532](#)

---

## SNMP

- [Understanding the Implementation of SNMP on page 5459](#)
- [Understanding the Implementation of SNMP on the QFabric System on page 5461](#)
- [Fabric Chassis MIB on page 5464](#)
- [Utility MIB on page 5467](#)



- [SNMPv3 Overview on page 5468](#)
- [Minimum SNMPv3 Configuration on a Device Running Junos OS on page 5469](#)
- [Understanding RMON on page 5470](#)
- [RMON MIB Event, Alarm, Log, and History Control Tables on page 5472](#)
- [Understanding Health Monitoring on page 5474](#)
- [Standard SNMP MIBs on page 5475](#)
- [Juniper Networks Enterprise-Specific MIBs on page 5484](#)
- [MIB Objects for the QFX Series on page 5490](#)
- [Standard SNMP Version 1 Traps on page 5492](#)
- [Standard SNMP Version 2 Traps on page 5495](#)
- [Juniper Networks Enterprise-Specific SNMP Version 1 Traps on page 5498](#)
- [Juniper Networks Enterprise-Specific SNMP Version 2 Traps on page 5500](#)

## Understanding the Implementation of SNMP

The QFX Series products support the Simple Network Management Protocol (SNMP) that is implemented in the Junos OS software.



**NOTE:** By default, SNMP is not enabled on devices running Junos OS. For information on enabling SNMP on a device running Junos OS, see [“Configuring SNMP” on page 1223](#).

A typical SNMP implementation includes the following components:

- **Network management system (NMS)**—The NMS is a combination of hardware and software that is used to monitor and administer a network. Software running on the NMS includes the SNMP manager, which collects information about network connectivity, activity, and events by polling the managed devices.
- **Managed device**—A managed device (also called a network element) is any device managed by the NMS. Routers and switches are common examples of managed devices. The SNMP agent is the SNMP process that resides on the managed device and communicates with the NMS.
- **SNMP agent**—The SNMP agent exchanges network management information with SNMP manager software running on an NMS, or host. The agent responds to requests for information and actions from the manager. The agent also controls access to the agent’s MIB, the collection of objects that can be viewed or changed by the SNMP manager.

SNMP data is stored in a highly structured, hierarchical format known as a management information base (MIB). The MIB structure is based on a tree structure, which defines a grouping of objects into related sets. Each object in the MIB is associated with an object identifier (OID), which names the object. The “leaf” in the tree structure is the actual managed object instance, which represents a resource, event, or activity that occurs in your network device. The SNMP implementation in Junos OS uses both standard



(developed by IETF and documented in RFCs) and Juniper Networks enterprise-specific MIBs.

Communication between the agent and the manager occurs in one of the following forms:

- **Get, GetBulk, and GetNext** requests—The manager requests information from the agent; the agent returns the information in a **Get** response message.
- **Set** requests—The manager changes the value of a MIB object controlled by the agent; the agent indicates status in a **Set** response message.
- **Traps** notification—The agent sends traps to notify the manager of significant events that occur on the network device.


The processes maintaining the SNMP management data include:

- A master SNMP agent (known as SNMP process, or `snmpd`) that resides on the managed device and is managed by the NMS or host.
- Various subagents that reside on different modules of Junos OS, such as the Routing Engine, and are managed by the master SNMP agent.
- Junos OS processes that share data with the subagents when polled for SNMP data (for example, interface-related MIBs).

When an NMS polls the master agent for data, the master agent immediately shares the data with the NMS if the requested data is available from the master agent or one of the subagents. However, if the requested data is not maintained by the master agent or subagents, the subagent polls the Junos OS kernel or the process that maintains that data. The Junos OS kernel may need to get the data from the Packet Forwarding Engine. On receiving the required data, the subagent passes the response back on to the master agent, which in turn passes it on to the NMS.

Figure 198 on page 5460 shows the communication flow among the NMS, SNMP master agent (`snmpd`), SNMP subagents, Junos OS kernel, and Packet Forwarding Engine.

Figure 198: SNMP Communication Flow

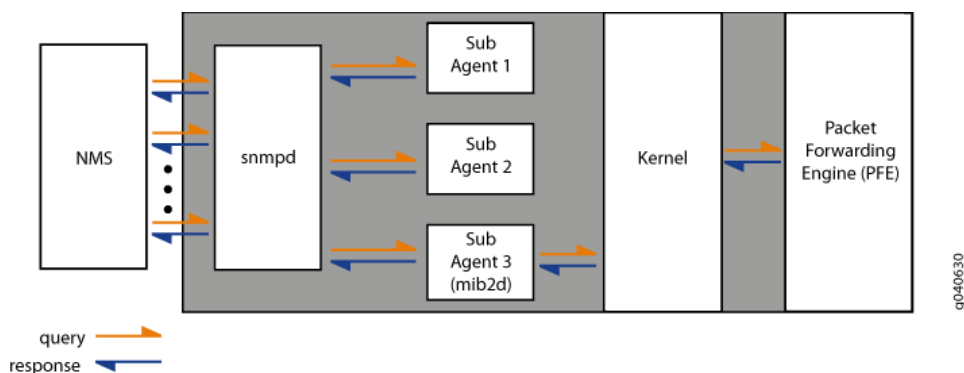

When a significant event, most often an error or a failure, occurs on a network device, the SNMP agent sends notifications to the SNMP manager. SNMP notifications can be sent as traps (unconfirmed notifications) or inform requests (confirmed notifications).



Junos OS supports trap queuing to ensure that traps are not lost because of temporary unavailability of routes. Two types of queues, destination queues and a throttle queue, are formed to ensure delivery of traps and control the trap traffic. On QFX Series products, the maximum size of trap queues (throttle queue plus destination queue) is 40,960 traps. The maximum size of any one queue is 20,480 traps.

Junos OS forms a destination queue when a trap to a particular destination is returned because the host is not reachable, and it adds the subsequent traps to the same destination to the queue. Junos OS checks for availability of routes every 30 seconds, and sends the traps from the destination queue in a round-robin fashion.

If the trap delivery fails, the trap is added back to the queue, and the delivery attempt counter and the next delivery attempt timer for the queue are reset. Subsequent attempts occur at progressive intervals of 1 minute, 2 minutes, 4 minutes, and 8 minutes. The maximum delay between the attempts is 8 minutes, and the maximum number of attempts is ten. After ten unsuccessful attempts, the destination queue and all the traps in the queue are deleted.

Junos OS also has a throttle mechanism to control the number of traps (throttle threshold) sent during a particular time period (throttle interval). The throttle mechanism ensures consistency in trap traffic, especially when large numbers of traps are generated because of interface status changes. The throttle interval period begins when the first trap arrives at the throttle. All traps within the trap threshold are processed, and the traps beyond the threshold limit are queued. The default throttle threshold is 500 traps, and the throttle interval default is 5 seconds.



**NOTE:** You cannot configure trap queueing in Junos OS. You cannot view information about trap queues except for what is provided in the system logs.

**Related Documentation**

- [Configuring SNMP on page 1223](#)

## Understanding the Implementation of SNMP on the QFabric System

Simple Network Management Protocol (SNMP) monitors network devices from a central location. The QFabric system supports the basic SNMP architecture of Junos OS, but its implementation of SNMP differs from that of other devices running Junos OS. This topic provides an overview of the SNMP implementation on the QFabric system.

As in other SNMP systems, the SNMP manager resides on the network management system (NMS) of the network to which the QFabric system belongs. The SNMP agent resides in the QFabric Director software and is responsible for receiving and distributing all traps as well as responding to all the queries of the SNMP manager. For example, traps that are generated by a Node device are sent to the SNMP agent in the Director software, which in turn processes and sends them to the target IP addresses that are defined in the SNMP configuration.





**NOTE:** In its SNMP implementation, the QFabric system acts as an SNMP proxy server, and requires more time to process SNMP requests than a typical Junos OS device. The default timeout setting on most SNMP client applications is 3 seconds, which is not enough time for the QFabric system to respond to SNMP requests, so the results of your `mibwalk` command may be incomplete. For this reason, we recommend that you change the SNMP timeout setting to 5 seconds or longer for the QFabric system to complete the responses to your requests.

Support for SNMP on the QFabric system includes:

- Support for the SNMP Version 1 (v1) and v2.



**NOTE:** Only SNMPv2 traps are supported on the QFabric system.

- Support for the following standard MIBs:
  - RFC 1155, *Structure and Identification of Management Information for TCP/IP-based Internets*
  - RFC 1157, *A Simple Network Management Protocol (SNMP)*
  - RFC 1212, *Concise MIB Definitions*
  - RFC 1213, *Management Information Base for Network Management of TCP/IP-Based Internets: MIB-II* (partial support, including the system group and interfaces group)
  - RFC 1215, *A Convention for Defining Traps for use with the SNMP*
  - RFC 1901, *Introduction to Community-based SNMPv2*
  - RFC 1905, *Protocol Operations for Version 2 of the Simple Network Management Protocol (SNMPv2)*
  - RFC 1907, *Management Information Base for Version 2 of the Simple Network Management Protocol (SNMPv2)*
  - RFC 2011, *SNMPv2 Management Information Base for the Internet Protocol Using SMIv2*
  - RFC 2012, *SNMPv2 Management Information Base for the Transmission Control Protocol Using SMIv2*
  - RFC 2013, *SNMPv2 Management Information Base for the User Datagram Protocol Using SMIv2*
  - RFC 2233, *The Interfaces Group MIB Using SMIv2*
  - RFC 2571, *An Architecture for Describing SNMP Management Frameworks* (read-only access) (excluding SNMPv3)
  - RFC 2572, *Message Processing and Dispatching for the Simple Network Management Protocol (SNMP)* (read-only access) (excluding SNMPv3)



- RFC 2576, *Coexistence between Version 1, Version 2, and Version 3 of the Internet-standard Network Management Framework* (excluding SNMPv3)
- RFC 2578, *Structure of Management Information Version 2 (SMIv2)*
- RFC 2579, *Textual Conventions for SMIv2*
- RFC 2580, *Conformance Statements for SMIv2*
- RFC 2665, *Definitions of Managed Objects for the Ethernet-like Interface Types*
- RFC 2863, *The Interfaces Group MIB*
- RFC 3410, *Introduction and Applicability Statements for Internet Standard Management Framework* (excluding SNMPv3)
- RFC 3411, *An Architecture for Describing Simple Network Management Protocol (SNMP) Management Framework* (excluding SNMPv3)
- RFC 3412, *Message Processing and Dispatching for the Simple Network Management Protocol (SNMP)* (excluding SNMPv3)
- RFC 3413, *Simple Network Management Protocol (SNMP) Applications* (excluding SNMPv3)
- RFC 3416, *Version 2 of the Protocol Operations for the Simple Network Management Protocol (SNMP)*
- RFC 3417, *Transport Mappings for the Simple Network Management Protocol (SNMP)*
- RFC 3418, *Management Information Base (MIB) for the Simple Network Management Protocol (SNMP)*
- RFC 3584, *Coexistence between Version 1, Version 2, and Version 3 of the Internet-standard Network Management Framework* (excluding SNMPv3)
- RFC 4188, *Definitions of Managed Objects for Bridges*
- RFC 4293, *Management Information Base for the Internet Protocol (IP)*
- RFC 4363b, *Q-Bridge VLAN MIB*
- Support for the following Juniper Networks enterprise-specific MIBs:
  - Chassis MIB (mib-jnx-chassis.txt)
  - Configuration Management MIB (mib-jnx-cfgmgmt.txt)
  - Fabric Chassis MIB (mib-jnx-fabric-chassis.txt)
  - Interface MIB Extensions (mib-jnx-if-extensions.txt)
  - Power Supply Unit MIB (mib-jnx-power-supply-unit.txt)
  - QFabric MIB (mib-jnx-qf-smi.txt)
  - Utility MIB (mib-jnx-util.txt)
- Support for operational mode commands—Limited to the **show snmp statistics** command. You may issue other SNMP requests, including **get**, **get next**, and **walk** requests, by using external SNMP client applications.



**Related Documentation**

- [Standard SNMP MIBs on page 5475](#)
- [Juniper Networks Enterprise-Specific MIBs on page 5484](#)
- [Juniper Networks Enterprise-Specific SNMP Version 2 Traps on page 5500](#)

## Fabric Chassis MIB

The Juniper Networks enterprise-specific SNMP Fabric Chassis MIB (mib-jnx-fabric-chassis) provides hardware information about the QFabric system and its component devices in a single MIB. The Fabric Chassis MIB is based on the Juniper Networks enterprise-specific Chassis MIB that provides information for individual devices. Unlike the Chassis MIB, the Fabric Chassis MIB represents the QFabric system component devices as part of the QFabric system. Only the information from the Fabric Chassis MIB (and not from individual Chassis MIBs) is available to SNMP management clients of the QFabric system.

The Fabric Chassis MIB uses the basic information structure of the Chassis MIB, but adds another level of indexing that provides detailed information about QFabric system devices. Each physical device in a QFabric system (such as a Node device or an Interconnect device) is represented with its hardware components, including the power supply, fans, and front and rear cards.



**NOTE:** Information about the Director group and the Virtual Chassis is not available in the Fabric Chassis MIB at this time.

As in other SNMP systems, the SNMP manager resides on the network management system (NMS) of the network to which the QFabric system belongs. The SNMP agent (snmpd) resides in the QFabric system Director software and is responsible for receiving and distributing all traps as well as responding to all queries from the SNMP manager. In addition, there is an SNMP subagent running in the Routing Engine of each Node group and Interconnect device. The SNMP subagent manages the information about the component device, and that information is communicated to the SNMP agent in the Director software as needed. Traps that are generated by a Node device are sent to the SNMP agent in the Director software, which in turn processes and sends them to the target IP addresses that are defined in the SNMP configuration.

Tables and objects in the Fabric Chassis MIB include:

- Tables that have counterparts in the Chassis MIB:
  - jnxFabricContainersTable—Root OID is 1.3.6.1.4.1.2636.3.42.2.2.2. Provides information about different types of containers in QFabric system devices. Containers for Interconnect devices include fan trays, power supply units, and control boards, and so on. Containers for Node devices include fan trays, power supply units, Flexible PIC Concentrator (FPC), PICs, and so on.
  - jnxFabricContentsTable—Root OID is 1.3.6.1.4.1.2636.3.42.2.2.3. Contains contents that are present across all devices represented in the jnxFabricDeviceTable object. Contents in the Interconnect devices include fan trays and control boards. Contents



in the Node devices include fan trays and power supply units. This table includes all field replaceable units (FRUs) and non-FRUs for QFabric system devices.

- `jnxFabricFilledTable`—Root OID is 1.3.6.1.4.1.2636.3.42.2.2.4. Shows the status of containers in QFabric devices. The `jnxFabricFilledState` object represents the state of the component: unknown (1), empty (2), or filled (3).
- `jnxFabricOperatingTable`—Root OID is 1.3.6.1.4.1.2636.3.42.2.2.5. Represents different operating parameters for the contents that are populated in the `jnxFabricContentsTable` object. Contents include fan trays, power supply units, FPC, PIC, and Routing Engine on each Node device and Interconnect device. The `jnxFabricOperatingState` object provides the state of the device: unknown (1), running (2), ready (3), reset (4), runningAtFullSpeed (5, for fans only), down (6), off (6, for power supply units), or standby (7).
- `jnxFabricRedundancyTable`—Root OID is 1.3.6.1.4.1.2636.3.42.2.2.6. Represents the redundancy information that is available at different subsystem levels across the QFabric system. Information about the Routing Engines in Node devices is included, but there are no corresponding entries for Interconnect devices in this table. The `jnxFabricRedundancyState` object indicates the state of the subsystem: unknown (1), master (2), backup (3), or disabled (4).



**NOTE:** Information about redundant Director devices, virtual machines (VMs) within Director groups, and Virtual Chassis devices are not available at this time.

- `jnxFabricFruTable`—Root OID is 1.3.6.1.4.1.2636.3.42.2.2.7. Contains all FRUs for the QFabric system in the `jnxFabricDeviceTable` table. The FRUs are listed regardless of whether or not they are installed or online. The `jnxFabricFruState` object represents the state of the FRU, including online, offline, or empty, and so on. This table also contains information about each FRU, such as name, type, temperature, time last powered on, and time last powered off.
- A table specific to the Fabric Chassis MIB called `jnxFabricDeviceTable` that contains information about all devices in the QFabric system. This table organizes scalar variables represented in the Chassis MIB into a table format for the QFabric system component devices. Columns in this table include device information such as model, device alias, and serial number. The `jnxFabricDeviceIndex` identifies each QFabric system device (Node device and Interconnect device). The root OID is 1.3.6.1.4.1.2636.42.2.2.1.



**NOTE:** At this time, information about the Director group and the Virtual Chassis is not available. In addition, the following objects are not supported: `jnxFabricDeviceEntryRevision`, `jnxFabricDeviceEntryFirmwareRevision`, and `jnxFabricDeviceEntryKernelMemoryUsedPercent`.

- Scalar variables that describe the QFabric system as a whole (root OID is 1.3.6.1.4.1.2636.3.42.2.1):



- jnxFabricClass
- jnxFabricDescr
- jnxFabricSerialNo
- jnxFabricRevision
- jnxFabricLastInstalled
- jnxFabricContentsLastChange
- jnxFabricFilledLastChange



**NOTE:** The jnxFabricFirmwareRevision scalar variable is not supported at this time.

- Two groups of SNMPv2 traps that are defined in the MIB:
  - Traps in the jnxFabricChassisTraps group indicate an alarm condition. The root OID for this trap group is 1.3.6.1.4.1.2636.4.19:
    - jnxFabricPowerSupplyFailure
    - jnxFabricFanFailure
    - jnxFabricOverTemperature
    - jnxFabricRedundancySwitchover
    - jnxFabricFruRemoval
    - jnxFabricFruInsertion
    - jnxFabricFruPowerOff
    - jnxFabricFruPowerOn
    - jnxFabricFruFailed
    - jnxFabricFruOffline
    - jnxFabricFruOnline
    - jnxFabricFruCheck
    - jnxFabricFEBSwitchover
    - jnxFabricHardDiskFailed
    - jnxFabricHardDiskMissing
    - jnxFabricBootFromBackup
  - Traps in the jnxFabricChassisOKTraps group indicate an alarm cleared condition. The root OID for this trap group is 1.3.6.1.4.1.2636.4.20:
    - jnxFabricPowerSupplyOK
    - jnxFabricFanOK



- jnxFabricTemperatureOK
- jnxFabricFruOK



**NOTE:** Only SNMPv2 traps are supported on the QFabric system.

For more information, see the Fabric Chassis MIB at:

[http://www.juniper.net/techpubs/en\\_US/junos12.2/topics/reference/mibs/mib-jnx-fabric-chassis.txt](http://www.juniper.net/techpubs/en_US/junos12.2/topics/reference/mibs/mib-jnx-fabric-chassis.txt)

#### Related Documentation

- [Understanding the Implementation of SNMP on the QFabric System on page 5461](#)
- [Chassis MIBs](#)
- [Standard SNMP MIBs on page 5475](#)
- [Juniper Networks Enterprise-Specific MIBs on page 5484](#)
- [Juniper Networks Enterprise-Specific SNMP Version 2 Traps on page 5500](#)

## Utility MIB

The Juniper Networks enterprise-specific Utility MIB, whose object ID is `{jnxUtilMibRoot1}`, defines objects for counters, integers, and strings. The Utility MIB contains one table for each of the following five data types:

- 32-bit counters
- 64-bit counters
- Signed integers
- Unsigned integers
- Octet strings

Each data type has an arbitrary ASCII name, which is defined when the data is populated, and a timestamp that shows the last time when the data instance was modified. For a downloadable version of this MIB, see

[http://www.juniper.net/techpubs/en\\_US/junos12.3/topics/reference/mibs/mib-jnx-util.txt](http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-util.txt).

For information about the enterprise-specific Utility MIB objects, see the following topics:

- `jnxUtilCounter32Table`
- `jnxUtilCounter64Table`
- `jnxUtilIntegerTable`
- `jnxUtilUintTable`
- `jnxUtilStringTable`

#### Related Documentation

- [Juniper Networks Enterprise-Specific MIBs](#)



- [Juniper Networks Enterprise-Specific MIBs on page 5484](#)
- [Standard SNMP MIBs Supported by Junos OS](#)
- [Understanding the Implementation of SNMP on the QFabric System on page 5461](#)

## SNMPv3 Overview

The QFX3500 switch supports SNMP version 3 (SNMPv3). SNMPv3 enhances the functionality of SNMPv1 and SNMPv2c by supporting user authentication and data encryption. SNMPv3 uses the user-based security model (USM) to provide security for SNMP messages, and the view-based access control model (VACM) for user access control.

SNMPv3 features include:

- With USM, the SNMP messages between the SNMP manager and the agent can have the message source authenticated and the data integrity checked. USM reduces messaging delays and message replays by enforcing timeout limits and by checking for duplicate message request IDs.
- VACM complements USM by providing user access control for SNMP queries to the agent. You define access privileges that you wish to extend to a group of one or more users. Access privileges are determined by the security model parameters (**usm**, **v1**, or **v2**) and security level parameters (**authentication**, **privacy**, or **none**). For each security level, you must associate one MIB view for the group. Associating a MIB view with a group grants the read, write, or notify permission to a set of MIB objects for the group.
- You configure security parameters for each user, including the username, authentication type and authentication password, and privacy type and privacy password. The username given to each user is in a format that is dependent on the security model configured for that user.
- To ensure messaging security, another type of username, called the security name, is included in the messaging data that is sent between the local SNMP server and the destination SNMP server. Each user name is mapped to a security name, but the security name is in a format that is independent of the security model.
- Trap entries in SNMPv3 are created by configuring the notify, notify filter, target address, and target parameters. The **notify** statement specifies the type of notification (trap) and contains a single tag that defines a set of target addresses to receive a trap. The notify filter defines access to a collection of trap object identifiers (OIDs). The target address defines the address of an SNMP management application and other attributes used in sending notifications. Target parameters define the message processing and security parameters used in sending notifications to a particular target.

### Related Documentation

- [Assigning a Security Name to a Group on page 5547](#)
- [Configuring Access Privileges for a Group on page 5546](#)
- [Configuring SNMP Informs on page 5549](#)
- [Creating SNMPv3 Users on page 5544](#)



## Minimum SNMPv3 Configuration on a Device Running Junos OS

To configure the minimum requirements for SNMPv3, include the following statements at the `[edit snmp v3]` and `[edit snmp]` hierarchy levels:



**NOTE:** You must configure at least one view (notify, read, or write) at the `[edit snmp view-name]` hierarchy level.

```
[edit snmp]
view view-name {
  oid object-identifier (include | exclude);
}
[edit snmp v3]
notify name {
  tag tag-name;
}
notify-filter profile-name {
  oid object-identifier (include | exclude);
}
snmp-community community-index {
  security-name security-name;
}
target-address target-address-name {
  address address;
  target-parameters target-parameters-name;
}
target-parameters target-parameters-name {
  notify-filter profile-name;
  parameters {
    message-processing-model (v1 | v2c | v3);
    security-level (authentication | none | privacy);
    security-model (usm | v1 | v2c);
    security-name security-name;
  }
}
usm {
  local-engine {
    user username {
    }
  }
}
vacm {
  access {
    group group-name {
      (default-context-prefix | context-prefix context-prefix){
        security-model (any | usm | v1 | v2c) {
          security-level (authentication | none | privacy) {
            notify-view view-name;
            read-view view-name;
            write-view view-name;
          }
        }
      }
    }
  }
}
```



```
    }  
  }  
  security-to-group {  
    security-model (usm | v1 | v2c) {  
      security-name security-name {  
        group group-name;  
      }  
    }  
  }  
}
```

**Related  
Documentation**

- [Creating SNMPv3 Users on page 5544](#)
- [Configuring MIB Views on page 5541](#)
- [Defining Access Privileges for an SNMP Group](#)
- [Configuring SNMPv3 Traps on a Device Running Junos OS on page 5548](#)
- [Configuring SNMP Informs on page 5549](#)
- [Complete SNMPv3 Configuration Statements](#)
- [Example: SNMPv3 Configuration](#)

## Understanding RMON

- [RMON Overview on page 5470](#)
- [Alarm Thresholds and Events on page 5471](#)

### RMON Overview

---

The Junos OS supports the *Remote Network Monitoring* (RMON) MIB (RFC 2819), which allows a management device to monitor the values of MIB objects, or variables, against configured thresholds. When the value of a variable crosses a threshold, an alarm and its corresponding event are generated. The event can be logged and can generate an SNMP trap.

An operational support system (OSS) or a fault-monitoring system can be used to automatically monitor events that track many different metrics, including performance, availability, faults, and environmental data. For example, an administrator might want to know when the internal temperature of a chassis has risen above a configured threshold, which might indicate that a chassis fan tray is faulty, the chassis air flow is impeded, or the facility cooling system in the vicinity of the chassis is not operating normally.

The RMON MIB also defines tables that store various statistics for Ethernet interfaces, including the **etherStatsTable** and the **etherHistoryTable**. The **etherStatsTable** contains cumulative real-time statistics for Ethernet interfaces, such as the number of unicast, multicast, and broadcast packets received on an interface. The **etherHistoryTable** maintains a historical sample of statistics for Ethernet interfaces. The control of the **etherHistoryTable**, including the interfaces to track and the sampling interval, is defined by the RMON **historyControlTable**.



To enable RMON alarms, you perform the following steps:


1. Configure SNMP, including trap groups. You configure SNMP at the `[edit snmp]` hierarchy level.
2. Configure rising and falling events in the `eventTable`, including the event types and trap groups. You can also configure events using the CLI at the `[edit snmp rmon event]` hierarchy level.
3. Configure alarms in the `alarmTable`, including the variables to monitor, rising and falling thresholds, the sampling types and intervals, and the corresponding events to generate when alarms occur. You can also configure alarms using the CLI at the `[edit snmp rmon alarm]` hierarchy level.

Extensions to the `alarmTable` are defined in the Juniper Networks enterprise-specific MIB `jnxRmon` (`mib-jnx-rmon.txt`).

### Alarm Thresholds and Events

By setting a rising and a falling threshold for a monitored variable, you can be alerted whenever the value of the variable falls outside the allowable operational range (see [Figure 199 on page 5471](#)).

Figure 199: Setting Thresholds

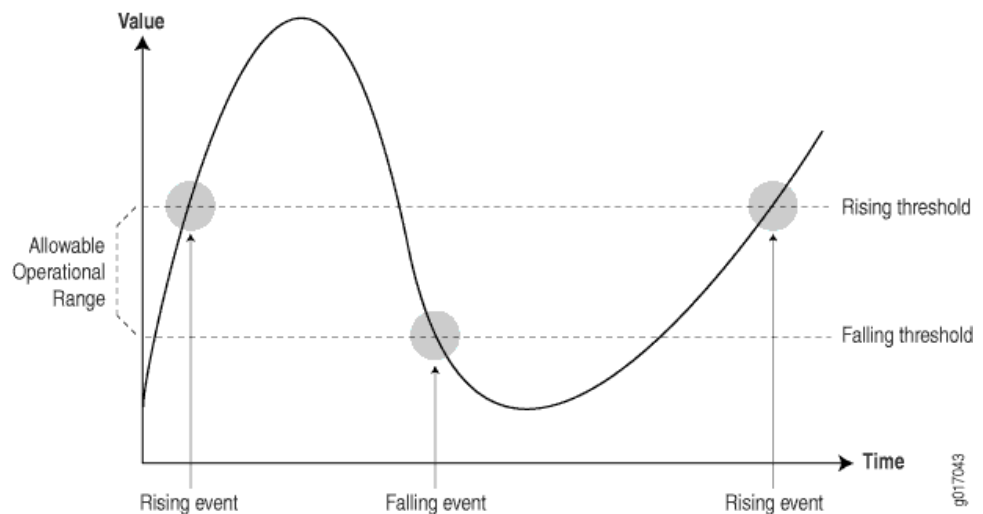

Events are only generated when the alarm threshold is first crossed in any one direction rather than after each sample interval. For example, if a rising threshold alarm, along with its corresponding event, is raised, no more threshold crossing events occur until a corresponding falling alarm occurs. This considerably reduces the quantity of events that are produced by the system, making it easier for operations staff to react when events do occur.

Before you configure remote monitoring, you should identify what variables need to be monitored and their allowable operational range. This requires some period of baselining to determine the allowable operational ranges. An initial baseline period of at least



3 months is not unusual when you first identify the operational ranges and define thresholds, but baseline monitoring should continue over the life span of each monitored variable.

**Related Documentation**

- [Configuring RMON Alarms and Events on page 5541](#)
- [Juniper Networks Enterprise-Specific MIBs on page 5484](#)
- [RMON MIB Event, Alarm, Log, and History Control Tables on page 5472](#)

## RMON MIB Event, Alarm, Log, and History Control Tables

The Junos OS supports the *Remote Network Monitoring* (RMON) MIB (RFC 2819), which allows a management device to monitor the values of MIB objects, or variables, against configured thresholds. When the value of a variable crosses a threshold, an alarm and its corresponding event are generated. The event can be logged and can generate an SNMP trap.

[Table 475 on page 5472](#) provides each field in the RMON **eventTable**, the description of the field, and the corresponding Junos OS statement that you can use to configure the field. The Junos OS statements reside at the **[edit snmp rmon]** hierarchy level.

**Table 475: RMON Event Table**

| Field                   | Description                                                                                                                     | Statement [edit snmp rmon] |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| <b>eventDescription</b> | Text description of this event.                                                                                                 | <b>description</b>         |
| <b>eventType</b>        | Type of event (for example, <b>log</b> , <b>trap</b> , or <b>log and trap</b> ).                                                | <b>type</b>                |
| <b>eventCommunity</b>   | Trap group to which to send this event, as defined in the Junos OS configuration. (This is not the same as the SNMP community.) | <b>community</b>           |
| <b>eventOwner</b>       | Entity (for example, <b>manager</b> ) that created this event.                                                                  | —                          |
| <b>eventStatus</b>      | Status of this row (for example, <b>valid</b> , <b>invalid</b> , or <b>createRequest</b> ).                                     | —                          |

[Table 476 on page 5472](#) provides each field in the RMON **alarmTable**, the description of the field, and the corresponding Junos OS statement that you can use to configure the field. The Junos OS statements reside at the **[edit snmp rmon]** hierarchy level.

**Table 476: RMON Alarm Table**

| Field                | Description                                                                                | Statement [edit snmp rmon] |
|----------------------|--------------------------------------------------------------------------------------------|----------------------------|
| <b>alarmStatus</b>   | Status of this row (for example, <b>valid</b> , <b>invalid</b> , or <b>createRequest</b> ) | —                          |
| <b>alarmInterval</b> | Sampling period (in seconds) of the monitored variable                                     | <b>interval</b>            |
| <b>alarmVariable</b> | Object identifier (OID) and instance of the variable to be monitored                       | —                          |



Table 476: RMON Alarm Table (*continued*)

| Field                         | Description                                                         | Statement [edit snmp rmon] |
|-------------------------------|---------------------------------------------------------------------|----------------------------|
| <b>alarmValue</b>             | Actual value of the sampled variable                                | —                          |
| <b>alarmSampleType</b>        | Sample type ( <b>absolute</b> or <b>delta</b> changes)              | <b>sample-type</b>         |
| <b>alarmStartupAlarm</b>      | Initial alarm ( <b>rising</b> , <b>falling</b> , or <b>either</b> ) | <b>startup-alarm</b>       |
| <b>alarmRisingThreshold</b>   | Rising threshold against which to compare the value                 | <b>rising-threshold</b>    |
| <b>alarmFallingThreshold</b>  | Falling threshold against which to compare the value                | <b>falling-threshold</b>   |
| <b>alarmRisingEventIndex</b>  | Index (row) of the rising event in the event table                  | <b>rising-event-index</b>  |
| <b>alarmFallingEventIndex</b> | Index (row) of the falling event in the event table                 | <b>falling-event-index</b> |

Table 477 on page 5473 provides each field in the **jnxRmon jnxRmonAlarmTable**, which is an extension to the RMON **alarmTable**. You can troubleshoot the RMON agent, **rmopd**, that runs on a switch by inspecting the contents of the **jnxRmonAlarmTable** object.

Table 477: jnxRmon Alarm Table

| Field                            | Description                                                                       |
|----------------------------------|-----------------------------------------------------------------------------------|
| <b>jnxRmonAlarmGetFailCnt</b>    | Number of times the internal <b>Get</b> request for the variable failed           |
| <b>jnxRmonAlarmGetFailTime</b>   | Value of the <b>sysUpTime</b> object when the last failure occurred               |
| <b>jnxRmonAlarmGetFailReason</b> | Reason why the <b>Get</b> request failed                                          |
| <b>jnxRmonAlarmGetOkTime</b>     | Value of the <b>sysUpTime</b> object when the variable moved out of failure state |
| <b>jnxRmonAlarmState</b>         | Status of this alarm entry                                                        |

Table 478 on page 5473 provides each field in the RMON **historyControlTable**, the description of the field, and the corresponding Junos OS statement that you can use to configure the field. The Junos OS statements reside at the **[edit snmp rmon history]** hierarchy level. The **historyControlTable** controls the RMON **etherHistoryTable**.

Table 478: RMON History Control Table

| Field                           | Description                                                                | Statement [edit snmp rmon history] |
|---------------------------------|----------------------------------------------------------------------------|------------------------------------|
| <b>historyControlDataSource</b> | Identifies the source of the data for which historical data was collected. | <b>interface</b>                   |



Table 478: RMON History Control Table (*continued*)

| Field                                       | Description                                                                 | Statement [edit snmp rmon history] |
|---------------------------------------------|-----------------------------------------------------------------------------|------------------------------------|
| <code>historyControlBucketsRequested</code> | Requested number of discrete time intervals over which data is to be saved. | <b>bucket-size</b>                 |
| <code>historyControlBucketsGranted</code>   | Number of discrete sampling intervals over which data is to be saved.       | —                                  |
| <code>historyControlInterval</code>         | Interval, in seconds, over which the data is sampled for each bucket.       | <b>interval</b>                    |
| <code>historyControlOwner</code>            | Entity that configured this entry.                                          | <b>owner</b>                       |
| <code>historyControlStatus</code>           | Status of this entry.                                                       | —                                  |

**Related Documentation**

- [Configuring RMON Alarms and Events on page 5541](#)
- [Juniper Networks Enterprise-Specific MIBs on page 5484](#)
- [Understanding RMON on page 5470](#)

## Understanding Health Monitoring

Health monitoring is an SNMP feature that extends the RMON alarm infrastructure to provide monitoring for a predefined set of objects (such as file system usage, CPU usage, and memory usage), and for Junos OS processes.

You enable the health monitor feature using the **health-monitor** statement at the **[edit snmp]** hierarchy level. You can also configure health monitor parameters such as a falling threshold, rising threshold, and interval. If the value of a monitored object exceeds the rising or falling threshold, an alarm is triggered and an event may be logged.

The falling threshold is the lower threshold for the monitored object instance. The rising threshold is the upper threshold for the monitored object instance. Each threshold is expressed as a percentage of the maximum possible value. The interval represents the period of time, in seconds, over which the object instance is sampled and compared with the rising and falling thresholds.

Events are only generated when a threshold is first crossed in any one direction, rather than after each sample interval. For example, if a rising threshold alarm, along with its corresponding event, is raised, no more threshold crossing events occur until a corresponding falling alarm occurs.

System log entries for health monitor events have a corresponding **HEALTHMONITOR** tag and not a generic **SNMPD\_RMON\_EVENTLOG** tag. However, the health monitor sends generic RMON **risingThreshold** and **fallingThreshold** traps. You can use the **show snmp health-monitor** operational command to view information about health monitor alarms and logs.



When you configure the health monitor, monitoring information for certain object instances is available, as shown in [Table 479 on page 5475](#).

**Table 479: Monitored Object Instances**

| Object                                 | Description                                                                                                                                         |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>jnxHrStoragePercentUsed.1</code> | Monitors the <code>/dev/ad0s1a</code> : file system on the switch. This is the root file system mounted on <code>/</code> .                         |
| <code>jnxHrStoragePercentUsed.2</code> | Monitors the <code>/dev/ad0s1e</code> : file system on the switch. This is the configuration file system mounted on <code>/config</code> .          |
| <code>jnxOperatingCPU (RE0)</code>     | Monitors CPU usage by the Routing Engine (RE0).                                                                                                     |
| <code>jnxOperatingBuffer (RE0)</code>  | Monitors the amount of memory available on the Routing Engine (RE0).                                                                                |
| <code>sysApplElmtRunCPU</code>         | Monitors the CPU usage for each Junos OS process (also called daemon). Multiple instances of the same process are monitored and indexed separately. |
| <code>sysApplElmtRunMemory</code>      | Monitors the memory usage for each Junos OS process. Multiple instances of the same process are monitored and indexed separately.                   |

- Related Documentation**
- [Configuring Health Monitoring on page 5544](#)
  - [falling-threshold \(Health Monitor\) on page 1287](#)
  - [interval \(Health Monitor\) on page 1292](#)
  - [rising-threshold \(Health Monitor\) on page 1322](#)
  - [show snmp health-monitor on page 5783](#)

## Standard SNMP MIBs

Standard SNMP MIBs and RFCs are supported on the QFX3500 and QFX3600 switches, and QFabric systems.

For more information about platform support:

- See [Table 480 on page 5476](#) for standard MIBs supported on QFX3500 and QFX3600 switches.
- See [Table 481 on page 5480](#) for standard MIBs supported on QFabric systems.

For RFC information, go to: <http://www.ietf.org>.



Table 480: Standard MIBs Supported on QFX3500 and QFX3600 Switches

| RFC                                                                                                   | Additional Information                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IEEE 802.1ab section 12.1, <i>Link Layer Discovery Protocol (LLDP) MIB</i>                            | Supported tables and objects: <ul style="list-style-type: none"> <li>• lldpRemManAddrOID</li> <li>• lldpLocManAddrOID</li> <li>• lldpReinitDelay</li> <li>• lldpNotificationInterval</li> <li>• lldpStatsRxPortFramesDiscardedTotal</li> <li>• lldpStatsRxPortFramesError</li> <li>• lldpStatsRxPortTLVsDiscardedTotal</li> <li>• lldpStatsRxPortTLVsUnrecognizedTotal</li> <li>• lldpStatsRxPortAgeoutsTotal</li> </ul>                                                                                                                                                                                                                     |
| IEEE 802.3ad, <i>Aggregation of Multiple Link Segments</i>                                            | The following tables and objects are supported: <ul style="list-style-type: none"> <li>• dot3adAggPortTable, dot3adAggPortListTable, dot3adAggTable, and dot3adAggPortStatsTable</li> <li>• dot3adAggPortDebugTable (only dot3adAggPortDebugRxState, dot3adAggPortDebugMuxState, dot3adAggPortDebugActorSyncTransitionCount, dot3adAggPortDebugPartnerSyncTransitionCount, dot3adAggPortDebugActorChangeCount, and dot3adAggPortDebugPartnerChangeCount)</li> <li>• dot3adTablesLastChanged</li> </ul>                                                                                                                                       |
| RFC 1155, <i>Structure and Identification of Management Information for TCP/IP-based Internets</i>    | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| RFC 1157, <i>A Simple Network Management Protocol (SNMP)</i>                                          | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| RFC 1212, <i>Concise MIB Definitions</i>                                                              | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| RFC 1213, <i>Management Information Base for Network Management of TCP/IP-Based Internets: MIB-II</i> | The following areas are supported: <ul style="list-style-type: none"> <li>• MIB II and its SNMP version 2 derivatives, including: <ul style="list-style-type: none"> <li>• Statistics counters</li> <li>• IP, except for ipRouteTable, which has been replaced by ipCidrRouteTable (RFC 2096, <i>IP Forwarding Table MIB</i>)</li> <li>• ipAddrTable</li> <li>• SNMP management</li> <li>• Interface management</li> </ul> </li> <li>• SNMPv1 Get, GetNext requests, and SNMPv2 GetBulk request</li> <li>• Junos OS-specific secured access list</li> <li>• Master configuration keywords</li> <li>• Reconfigurations upon SIGHUP</li> </ul> |
| RFC 1215, <i>A Convention for Defining Traps for use with the SNMP</i>                                | Support is limited to MIB II SNMP version 1 traps and version 2 notifications.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |



Table 480: Standard MIBs Supported on QFX3500 and QFX3600 Switches (*continued*)

| RFC                                                                                                                       | Additional Information                                                                                                                                                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RFC 1286, <i>Definitions of Managed Objects for Bridges</i>                                                               | —                                                                                                                                                                                                                                                                               |
| RFC 1657, <i>Definitions of Managed Objects for the Fourth Version of the Border Gateway Protocol (BGP-4) using SMIv2</i> | —                                                                                                                                                                                                                                                                               |
| RFC 1850, <i>OSPF Version 2 Management Information Base</i>                                                               | <p>The following table, objects, and traps are not supported:</p> <ul style="list-style-type: none"> <li>• Host Table</li> <li>• ospfOriginateNewLsas and ospfRxNewLsas objects</li> <li>• ospfOriginateLSA, ospfLsdbOverflow, and ospfLsdbApproachingOverflow traps</li> </ul> |
| RFC 1901, <i>Introduction to Community-based SNMPv2</i>                                                                   | —                                                                                                                                                                                                                                                                               |
| RFC 1905, <i>Protocol Operations for Version 2 of the Simple Network Management Protocol (SNMPv2)</i>                     | —                                                                                                                                                                                                                                                                               |
| RFC 1907, <i>Management Information Base for Version 2 of the Simple Network Management Protocol (SNMPv2)</i>             | —                                                                                                                                                                                                                                                                               |
| RFC 2011, <i>SNMPv2 Management Information Base for the Internet Protocol Using SMIv2</i>                                 | —                                                                                                                                                                                                                                                                               |
| RFC 2012, <i>SNMPv2 Management Information Base for the Transmission Control Protocol Using SMIv2</i>                     | —                                                                                                                                                                                                                                                                               |
| RFC 2013, <i>SNMPv2 Management Information Base for the User Datagram Protocol Using SMIv2</i>                            | —                                                                                                                                                                                                                                                                               |
| RFC 2233, <i>The Interfaces Group MIB Using SMIv2</i>                                                                     | <p><b>NOTE:</b> RFC 2233 has been replaced by RFC 2863. However, Junos OS supports both RFC 2233 and RFC 2863.</p>                                                                                                                                                              |
| RFC 2287, <i>Definitions of System-Level Managed Objects for Applications</i>                                             | <p>The following objects are supported:</p> <ul style="list-style-type: none"> <li>• sysApplInstallPkgTable</li> <li>• sysApplInstallElmtTable</li> <li>• sysApplElmtRunTable</li> <li>• sysApplMapTable</li> </ul>                                                             |
| RFC 2570, <i>Introduction to Version 3 of the Internet-standard Network Management Framework</i>                          | —                                                                                                                                                                                                                                                                               |



Table 480: Standard MIBs Supported on QFX3500 and QFX3600 Switches (*continued*)

| RFC                                                                                                                            | Additional Information                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RFC 2571, <i>An Architecture for Describing SNMP Management Frameworks</i> (read-only access)                                  | <b>NOTE:</b> RFC 2571 has been replaced by RFC 3411. However, Junos OS supports both RFC 2571 and RFC 3411.                                                                                                                                                                                                                                                                                                  |
| RFC 2572, <i>Message Processing and Dispatching for the Simple Network Management Protocol (SNMP)</i> (read-only access)       | <b>NOTE:</b> RFC 2572 has been replaced by RFC 3412. However, Junos OS supports both RFC 2572 and RFC 3412.                                                                                                                                                                                                                                                                                                  |
| RFC 2576, <i>Coexistence between Version 1, Version 2, and Version 3 of the Internet-standard Network Management Framework</i> | <b>NOTE:</b> RFC 2576 has been replaced by RFC 3584. However, Junos OS supports both RFC 2576 and RFC 3584.                                                                                                                                                                                                                                                                                                  |
| RFC 2578, <i>Structure of Management Information Version 2 (SMIv2)</i>                                                         | —                                                                                                                                                                                                                                                                                                                                                                                                            |
| RFC 2579, <i>Textual Conventions for SMIv2</i>                                                                                 | —                                                                                                                                                                                                                                                                                                                                                                                                            |
| RFC 2580, <i>Conformance Statements for SMIv2</i>                                                                              | —                                                                                                                                                                                                                                                                                                                                                                                                            |
| RFC 2665, <i>Definitions of Managed Objects for the Ethernet-like Interface Types</i>                                          | —                                                                                                                                                                                                                                                                                                                                                                                                            |
| RFC 2787, <i>Definitions of Managed Objects for the Virtual Router Redundancy Protocol</i>                                     | Support does not include row creation, the <b>Set</b> operation, and the <b>vrpStatsPacketLengthErrors</b> object.                                                                                                                                                                                                                                                                                           |
| RFC 2790, <i>Host Resources MIB</i>                                                                                            | Support is limited to the following objects: <ul style="list-style-type: none"> <li>Only <b>hrStorageTable</b>. The file systems <b>/</b>, <b>/config</b>, <b>/var</b>, and <b>/tmp</b> always return the same index number. When SNMP restarts, the index numbers for the remaining file systems might change.</li> <li>Only the objects of the <b>hrSystem</b> and <b>hrSWInstalled</b> groups.</li> </ul> |
| RFC 2819, <i>Remote Network Monitoring Management Information Base</i>                                                         | The following objects are supported: <ul style="list-style-type: none"> <li><b>etherStatsTable</b> (for Ethernet interfaces only), <b>alarmTable</b>, <b>eventTable</b>, and <b>logTable</b>.</li> <li><b>historyControlTable</b> and <b>etherHistoryTable</b> (except the <b>etherHistoryUtilization</b> object).</li> </ul>                                                                                |
| RFC 2863, <i>The Interfaces Group MIB</i>                                                                                      | <b>NOTE:</b> RFC 2233 has been replaced by RFC 2863. However, Junos OS supports both RFC 2233 and RFC 2863.                                                                                                                                                                                                                                                                                                  |
| RFC 2932, <i>IPv4 Multicast Routing MIB</i>                                                                                    | —                                                                                                                                                                                                                                                                                                                                                                                                            |
| RFC 2933, <i>Internet Group Management Protocol (IGMP) MIB</i>                                                                 | —                                                                                                                                                                                                                                                                                                                                                                                                            |
| RFC 2934, <i>Protocol Independent Multicast MIB for IPv4</i>                                                                   | In Junos OS, RFC 2934 is implemented based on a draft version, <i>pimmib.mib</i> , of the now standard RFC.                                                                                                                                                                                                                                                                                                  |



Table 480: Standard MIBs Supported on QFX3500 and QFX3600 Switches (*continued*)

| RFC                                                                                                                            | Additional Information                                                                          |
|--------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| RFC 3410, <i>Introduction and Applicability Statements for Internet Standard Management Framework</i>                          | —                                                                                               |
| RFC 3411, <i>An Architecture for Describing Simple Network Management Protocol (SNMP) Management Frameworks</i>                | <b>NOTE:</b> RFC 3411 replaces RFC 2571. However, Junos OS supports both RFC 3411 and RFC 2571. |
| RFC 3412, <i>Message Processing and Dispatching for the Simple Network Management Protocol (SNMP)</i>                          | <b>NOTE:</b> RFC 3412 replaces RFC 2572. However, Junos OS supports both RFC 3412 and RFC 2572. |
| RFC 3413, <i>Simple Network Management Protocol (SNMP) Applications</i>                                                        | All MIBs are supported except for the Proxy MIB.                                                |
| RFC 3414, <i>User-based Security Model (USM) for version 3 of the Simple Network Management Protocol (SNMPv3)</i>              | —                                                                                               |
| RFC 3415, <i>View-based Access Control Model (VACM) for the Simple Network Management Protocol (SNMP)</i>                      | —                                                                                               |
| RFC 3416, <i>Version 2 of the Protocol Operations for the Simple Network Management Protocol (SNMP)</i>                        | <b>NOTE:</b> RFC 3416 replaces RFC 1905, which was supported in earlier versions of Junos OS.   |
| RFC 3417, <i>Transport Mappings for the Simple Network Management Protocol (SNMP)</i>                                          | —                                                                                               |
| RFC 3418, <i>Management Information Base (MIB) for the Simple Network Management Protocol (SNMP)</i>                           | <b>NOTE:</b> RFC 3418 replaces RFC 1907, which was supported in earlier versions of Junos OS.   |
| RFC 3584, <i>Coexistence between Version 1, Version 2, and Version 3 of the Internet-standard Network Management Framework</i> | —                                                                                               |
| RFC 3826, <i>The Advanced Encryption Standard (AES) Cipher Algorithm in the SNMP User-based Security Model</i>                 | —                                                                                               |



Table 480: Standard MIBs Supported on QFX3500 and QFX3600 Switches (*continued*)

| RFC                                                                                                                                                               | Additional Information                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RFC 4188, <i>Definitions of Managed Objects for Bridges</i>                                                                                                       | <p>The QFX3500 and QFX3600 switches support 802.1D STP (1998) and the following subtrees and objects only:</p> <ul style="list-style-type: none"> <li><b>dot1dTp</b> subtree—<b>dot1dTpFdbAddress</b>, <b>dot1dTpFdbPort</b>, and <b>dot1dTpFdbStatus</b> objects from the <b>dot1dTpFdbTable</b> table.</li> <li><b>dot1dBase</b> subtree—<b>dot1dBasePort</b> and <b>dot1dBasePortIfIndex</b> objects from the <b>dot1dBasePortTable</b> table.</li> </ul> <p><b>NOTE:</b> On QFX3500 and QFX3600 switches, the <b>dot1dTpFdbTable</b> table is populated only with MAC addresses learned on the default VLAN. To see the MAC addresses of all VLANs, specify the <b>dot1qTpFdbTable</b> table (RFC 4363b, <i>Q-Bridge VLAN MIB</i>) when you issue the <b>show snmp mib walk</b> command.</p> |
| RFC 4293, <i>Management Information Base for the Internet Protocol (IP)</i>                                                                                       | Supports the <b>ipAddrTable</b> table only.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| RFC 4318, <i>Definitions of Managed Objects for Bridges with Rapid Spanning Tree Protocol</i>                                                                     | Supports 802.1w and 802.1t extensions for RSTP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| RFC 4363b, <i>Q-Bridge VLAN MIB</i>                                                                                                                               | <p><b>NOTE:</b> On QFX3500 and QFX3600 switches, the <b>dot1dTpFdbTable</b> table (RFC 4188, <i>Definitions of Managed Objects for Bridges</i>) is populated only with MAC addresses learned on the default VLAN. To see the MAC addresses of all VLANs, specify the <b>dot1qTpFdbTable</b> table (in this MIB) when you issue the <b>show snmp mib walk</b> command.</p>                                                                                                                                                                                                                                                                                                                                                                                                                        |
| RFC 4444, <i>IS-IS MIB</i>                                                                                                                                        | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Internet Assigned Numbers Authority, <i>IANAiftype Textual Convention MIB</i> (referenced by RFC 2233)                                                            | See <a href="http://www.iana.org/assignments/ianaiftype-mib">http://www.iana.org/assignments/ianaiftype-mib</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Internet draft<br>draft-reeder-snmpv3-usm-3desede-00.txt, <i>Extension to the User-Based Security Model (USM) to Support Triple-DES EDE in 'Outside' CBC Mode</i> | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Internet draft<br>draft-ietf-idmr-igmp-mib-13.txt, <i>Internet Group Management Protocol (IGMP) MIB</i>                                                           | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| ESO Consortium MIB                                                                                                                                                | <p><b>NOTE:</b> The ESO Consortium MIB has been replaced by RFC 3826. See <a href="http://www.snmp.com/eso/">http://www.snmp.com/eso/</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

Table 481: Standard MIBs Supported on QFabric Systems

| RFC                                                                                                | Additional Information |
|----------------------------------------------------------------------------------------------------|------------------------|
| RFC 1155, <i>Structure and Identification of Management Information for TCP/IP-based Internets</i> | —                      |



Table 481: Standard MIBs Supported on QFabric Systems (*continued*)

| RFC                                                                                                           | Additional Information                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RFC 1157, <i>A Simple Network Management Protocol (SNMP)</i>                                                  | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| RFC 1212, <i>Concise MIB Definitions</i>                                                                      | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| RFC 1213, <i>Management Information Base for Network Management of TCP/IP-Based Internets: MIB-II</i>         | <p>The following areas are supported:</p> <ul style="list-style-type: none"> <li>• MIB II and its SNMP version 2 derivatives, including: <ul style="list-style-type: none"> <li>• Statistics counters</li> <li>• IP, except for ipRouteTable, which has been replaced by ipCidrRouteTable (RFC 2096, <i>IP Forwarding Table MIB</i>)</li> <li>• ipAddrTable</li> <li>• SNMP management</li> <li>• Interface management</li> </ul> </li> <li>• SNMPv1 <b>Get</b>, <b>GetNext</b> requests, and version 2 <b>GetBulk</b> request</li> <li>• Junos OS-specific secured access list</li> <li>• Master configuration keywords</li> <li>• Reconfigurations upon SIGHUP</li> </ul> |
| RFC 1215, <i>A Convention for Defining Traps for use with the SNMP</i>                                        | Support is limited to MIB II SNMP version 1 traps and version 2 notifications.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| RFC 1286, <i>Definitions of Managed Objects for Bridges</i>                                                   | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| RFC 1901, <i>Introduction to Community-based SNMPv2</i>                                                       | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| RFC 1905, <i>Protocol Operations for Version 2 of the Simple Network Management Protocol (SNMPv2)</i>         | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| RFC 1907, <i>Management Information Base for Version 2 of the Simple Network Management Protocol (SNMPv2)</i> | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| RFC 2011, <i>SNMPv2 Management Information Base for the Internet Protocol Using SMIv2</i>                     | <b>NOTE:</b> On the QFabric system, for the SNMP mibwalk request to work, you must configure the IP address of at least one interface besides the management Ethernet interfaces (me0 and me1) in the Director group.                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| RFC 2012, <i>SNMPv2 Management Information Base for the Transmission Control Protocol Using SMIv2</i>         | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| RFC 2013, <i>SNMPv2 Management Information Base for the User Datagram Protocol Using SMIv2</i>                | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |



Table 481: Standard MIBs Supported on QFabric Systems (*continued*)

| RFC                                                                                                                            | Additional Information                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RFC 2233, <i>The Interfaces Group MIB Using SMIv2</i>                                                                          | <p><b>NOTE:</b> RFC 2233 has been replaced by RFC 2863. However, Junos OS supports both RFC 2233 and RFC 2863.</p> <p><b>NOTE:</b> The QFabric system supports the following objects only: <b>ifNumber</b>, <b>ifTable</b>, and <b>ifxTable</b>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| RFC 2571, <i>An Architecture for Describing SNMP Management Frameworks</i> (read-only access)                                  | <p><b>NOTE:</b> RFC 2571 has been replaced by RFC 3411. However, Junos OS supports both RFC 2571 and RFC 3411.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| RFC 2572, <i>Message Processing and Dispatching for the Simple Network Management Protocol (SNMP)</i> (read-only access)       | <p><b>NOTE:</b> RFC 2572 has been replaced by RFC 3412. However, Junos OS supports both RFC 2572 and RFC 3412.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| RFC 2576, <i>Coexistence between Version 1, Version 2, and Version 3 of the Internet-standard Network Management Framework</i> | <p><b>NOTE:</b> RFC 2576 has been replaced by RFC 3584. However, Junos OS supports both RFC 2576 and RFC 3584.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| RFC 2578, <i>Structure of Management Information Version 2 (SMIv2)</i>                                                         | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| RFC 2579, <i>Textual Conventions for SMIv2</i>                                                                                 | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| RFC 2580, <i>Conformance Statements for SMIv2</i>                                                                              | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| RFC 2665, <i>Definitions of Managed Objects for the Ethernet-like Interface Types</i>                                          | <p>The QFabric system supports the following tables only:</p> <ul style="list-style-type: none"> <li>• dot3StatsTable—There is one row with statistics for each Ethernet-like interface in the QFabric system. The dot3StatsIndex is an interface index that is unique across the system.</li> <li>• dot3ControlTable—There is one row in this table for each Ethernet-like interface in the QFabric system that implements the MAC control sublayer. OIDs supported are dot3ControlFunctionsSupported and dot3ControlInUnknownOpcode.</li> <li>• dot3PauseTable—There is one row in this table for each Ethernet-like interface in the QFabric system that supports the MAC control PAUSE function. OIDs supported are dot3PauseAdminMode, dot3PauseOperMode, dot3InPauseFrames, and dot3OutPauseFrames.</li> </ul> <p><b>NOTE:</b> Scalar variables are not supported on the QFabric system.</p> |
| RFC 2863, <i>The Interfaces Group MIB</i>                                                                                      | <p><b>NOTE:</b> RFC 2233 has been replaced by RFC 2863. However, Junos OS supports both RFC 2233 and RFC 2863.</p> <p><b>NOTE:</b> The QFabric system supports the following objects only: <b>ifNumber</b>, <b>ifTable</b>, and <b>ifxTable</b>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| RFC 2933, <i>Internet Group Management Protocol (IGMP) MIB</i>                                                                 | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



Table 481: Standard MIBs Supported on QFabric Systems (*continued*)

| RFC                                                                                                                            | Additional Information                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RFC 3410, <i>Introduction and Applicability Statements for Internet Standard Management Framework</i>                          | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| RFC 3411, <i>An Architecture for Describing Simple Network Management Protocol (SNMP) Management Frameworks</i>                | <b>NOTE:</b> RFC 3411 replaces RFC 2571. However, Junos OS supports both RFC 3411 and RFC 2571.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| RFC 3412, <i>Message Processing and Dispatching for the Simple Network Management Protocol (SNMP)</i>                          | <b>NOTE:</b> RFC 3412 replaces RFC 2572. However, Junos OS supports both RFC 3412 and RFC 2572.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| RFC 3416, <i>Version 2 of the Protocol Operations for the Simple Network Management Protocol (SNMP)</i>                        | <b>NOTE:</b> RFC 3416 replaces RFC 1905, which was supported in earlier versions of Junos OS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| RFC 3417, <i>Transport Mappings for the Simple Network Management Protocol (SNMP)</i>                                          | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| RFC 3418, <i>Management Information Base (MIB) for the Simple Network Management Protocol (SNMP)</i>                           | <b>NOTE:</b> RFC 3418 replaces RFC 1907, which was supported in earlier versions of Junos OS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| RFC 3584, <i>Coexistence between Version 1, Version 2, and Version 3 of the Internet-standard Network Management Framework</i> | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| RFC 4188, <i>Definitions of Managed Objects for Bridges</i>                                                                    | <p>The QFabric system support is limited to the following objects:</p> <ul style="list-style-type: none"> <li>Under the dot1dBase OID, the dot1dBasePortTable table supports only the first two columns in the table: dot1dBasePort and dot1dBasePortIfIndex.</li> <li>The system does not implement the optional traps supporting dot1dNotifications (dot1dBridge 0).</li> <li>Under the dot1dStp OID, supports only the dot1dStpPortTable table. Does not support the scalar variables under dot1dStp.</li> <li>The system does not support scalar variables under dot1dTp, but under that, the dot1dTpFdbTable table is supported (dot1dBridge 4).</li> <li>For OIDs with tables support only, scalar values that are returned by the SNMP agent may not be meaningful and are therefore not recommended for use.</li> </ul> |
| RFC 4293, <i>Management Information Base for the Internet Protocol (IP)</i>                                                    | <p>Supports the ipAddrTable table only.</p> <p>On the QFabric system, supported objects in the ipAddrTable table include: ipAdEntAddr, ipAdEntIfIndex, ipAdEntNetMask, ipAdEntBcastAddr, and ipAdEntReasmMaxSize.</p> <p><b>NOTE:</b> On the QFabric system, for the SNMP mibwalk request to work, you must configure the IP address of at least one interface besides the management Ethernet interfaces (me0 and me1) in the Director group.</p>                                                                                                                                                                                                                                                                                                                                                                              |



Table 481: Standard MIBs Supported on QFabric Systems (*continued*)

| RFC                                 | Additional Information                                                                                                                                                                                                   |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RFC 4363b, <i>Q-Bridge VLAN MIB</i> | <p>The QFabric system supports the following tables only:</p> <ul style="list-style-type: none"> <li>• dot1qTpFdbTable</li> <li>• dot1qVlanStaticTable</li> <li>• dot1qPortVlanTable</li> <li>• dot1qFdbTable</li> </ul> |

- Related Documentation**
- [Juniper Networks Enterprise-Specific MIBs on page 5484](#)
  - [Standard SNMP Version 1 Traps on page 5492](#)
  - [Standard SNMP Version 2 Traps on page 5495](#)

## Juniper Networks Enterprise-Specific MIBs

Juniper Networks enterprise-specific MIBs are supported on QFX3500 and QFX3600 switches, and QFabric systems.

For more information, see:

- [Table 482 on page 5484](#) for Juniper Networks enterprise-specific MIBs supported on QFX3500 and QFX3600 switches.
- [Table 483 on page 5488](#) for Juniper Networks enterprise-specific MIBs supported on QFabric systems.

Table 482: Juniper Networks Enterprise-Specific MIBs Supported on QFX3500 and QFX3600 Switches

| MIB                               | Description                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Alarm MIB (mib-jnx-chassis-alarm) | <p>Provides support for alarms from the switch.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-chassis-alarm.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-chassis-alarm.txt</a>.</p> <p>For more information, see Alarm MIB.</p>                   |
| Analyzer MIB (mib-jnx-analyzer)   | <p>Contains analyzer and remote analyzer data related to port mirroring.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-analyzer.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-analyzer.txt</a>.</p> <p>For more information, see Analyzer MIB.</p> |



**Table 482: Juniper Networks Enterprise-Specific MIBs Supported on QFX3500 and QFX3600 Switches (*continued*)**

| MIB                                                             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Chassis MIB (mib-jnx-chassis)                                   | <p>Provides support for environmental monitoring (power supply state, board voltages, fans, temperatures, and airflow) and inventory support for the chassis, Flexible PIC Concentrators (FPCs), and PICs.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-chassis.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-chassis.txt</a>.</p> <p>For more information, see Chassis MIBs.</p>                                                                                                                                                                              |
| Chassis Definitions for Router Model MIB (mib-jnx-chas-defines) | <p>Contains the object identifiers (OIDs) that are used by the Chassis MIB to identify routing and switching platforms and chassis components. The Chassis MIB provides information that changes often, whereas the Chassis Definitions for Router Model MIB provides information that changes less often.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-chas-defines.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-chas-defines.txt</a>.</p> <p>For more information, see Chassis MIBs.</p>                                                                    |
| Class-of-Service MIB (mib-jnx-cos)                              | <p>Provides support for monitoring interface output queue statistics per interface and per forwarding class.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-cos.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-cos.txt</a>.</p> <p>For more information, see Class-of-Service MIB.</p>                                                                                                                                                                                                                                                                            |
| Configuration Management MIB (mib-jnx-cfgmgmt)                  | <p>Provides notification for configuration changes and rescue configuration changes in the form of SNMP traps. Each trap contains the time at which the configuration change was committed, the name of the user who made the change, and the method by which the change was made.</p> <p>A history of the last 32 configuration changes is kept in jnxCmChgEventTable.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-cfgmgmt.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-cfgmgmt.txt</a>.</p> <p>For more information, see Configuration Management MIB.</p> |
| Ethernet MAC MIB (mib-jnx-mac)                                  | <p>Monitors media access control (MAC) statistics on Gigabit Ethernet intelligent queuing (IQ) interfaces. It collects MAC statistics; for example, inoctets, inframes, outoctets, and outframes on each source MAC address and virtual LAN (VLAN) ID for each Ethernet port.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-mac.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-mac.txt</a>.</p> <p>For more information, see Ethernet MAC MIB.</p>                                                                                                               |



**Table 482: Juniper Networks Enterprise-Specific MIBs Supported on QFX3500 and QFX3600 Switches** (*continued*)

| MIB                                                | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Event MIB (mib-jnx-event)                          | <p>Defines a generic trap that can be generated using an operations script or event policy. This MIB provides the ability to specify a system log string and raise a trap if that system log string is found.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-event.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-event.txt</a>.</p> <p>For more information, see Event MIB.</p>                                                                                                                                                                         |
| Firewall MIB (mib-jnx-firewall)                    | <p>Provides support for monitoring firewall filter counters.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-firewall.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-firewall.txt</a>.</p> <p>For more information, see Firewall MIB.</p>                                                                                                                                                                                                                                                                                                                 |
| Host Resources MIB (mib-jnx-hostresources)         | <p>Extends the hrStorageTable object, providing a measure of the usage of each file system on the switch as a percentage. Previously, the objects in the hrStorageTable measured the usage in allocation units—hrStorageUsed and hrStorageAllocationUnits—only. Using the percentage measurement, you can more easily monitor and apply thresholds on usage.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-hostresources.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-hostresources.txt</a>.</p> <p>For more information, see Host Resources MIB.</p> |
| Interface MIB (Extensions) (mib-jnx-if-extensions) | <p>Extends the standard ifTable (RFC 2863) with additional statistics and Juniper Networks enterprise-specific chassis information in the ifJnxTable and ifChassisTable tables.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-if-extensions.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-if-extensions.txt</a>.</p> <p>For more information, see Interface MIB.</p>                                                                                                                                                                                   |
| Ping MIB (mib-jnx-ping)                            | <p>Extends the standard Ping MIB control table (RFC 2925). Items in this MIB are created when entries are created in the pingCtlTable table of the Ping MIB. Each item is indexed exactly as it is in the Ping MIB.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-ping.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-ping.txt</a>.</p> <p>For more information, see PING MIB.</p>                                                                                                                                                                      |



**Table 482: Juniper Networks Enterprise-Specific MIBs Supported on QFX3500 and QFX3600 Switches (continued)**

| MIB                                                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RMON Events and Alarms MIB (mib-jnx-rmon)             | <p>Supports Junos OS extensions to the standard Remote Monitoring (RMON) Events and Alarms MIB (RFC 2819). The extension augments the alarmTable object with additional information about each alarm. Two additional traps are also defined to indicate when problems are encountered with an alarm.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-rmon.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-rmon.txt</a>.</p> <p>For more information, see RMON Events and Alarms MIB.</p>                                              |
| Structure of Management Information MIB (mib-jnx-smi) | <p>Explains how the Juniper Networks enterprise-specific MIBs are structured.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-smi.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-smi.txt</a>.</p> <p>For more information, see Structure of Management Information MIB.</p>                                                                                                                                                                                                                                                          |
| System Log MIB (mib-jnx-syslog)                       | <p>Enables notification of an SNMP trap-based application when an important system log message occurs.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-syslog.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-syslog.txt</a>.</p> <p>For more information, see System Log MIB.</p>                                                                                                                                                                                                                                                    |
| Utility MIB (mib-jnx-util)                            | <p>Provides you with SNMP MIB container objects of the following types: 32-bit counters, 64-bit counters, signed integers, unsigned integers, and octet strings. You can use these objects to store data that can be retrieved using other SNMP operations.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-util.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-util.txt</a>.</p> <p>For more information, see “Utility MIB” on page 5467 and “Using the Enterprise-Specific Utility MIB to Enhance SNMP Coverage” on page 5735.</p> |
| VLAN MIB (mib-jnx-vlan)                               | <p>Contains information about prestandard IEEE 802.10 VLANs and their association with LAN emulation clients.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-vlan.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-vlan.txt</a>.</p> <p>For more information, see VLAN MIB.</p>                                                                                                                                                                                                                                                       |



Table 483: Juniper Networks Enterprise-Specific MIBs Supported on QFabric Systems

| MIB                                            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Analyzer MIB (mib-jnx-analyzer)                | <p>Contains analyzer and remote analyzer data related to port mirroring.</p> <p>The QFabric system supports:</p> <ul style="list-style-type: none"> <li>Analyzer table—jnxAnalyzerName, jnxMirroringRatio, jnxLossPriority.</li> <li>Analyzer input table—jnxAnalyzerInputValue, jnxAnalyzerInputOption, jnxAnalyzerInputType.</li> <li>, Analyzer output table—jnx AnalyzerOutputValue, jnxAnalyzerOutputType.</li> </ul> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-analyzer.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-analyzer.txt</a>.</p> <p>For more information, see Analyzer MIB.</p>                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Chassis MIB (mib-jnx-chassis)                  | <p>Provides support for environmental monitoring (power supply state, board voltages, fans, temperatures, and airflow) and inventory support for the chassis, Flexible PIC Concentrators (FPCs), and PICs.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-chassis.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-chassis.txt</a>.</p> <p><b>NOTE:</b> On the QFabric system, support for scalar variables (such as memory usage) for the Chassis MIB is limited to the following objects: jnxBoxClass, jnxBoxDescr, and jnxBoxSerialNo.</p> <p>For more information, see Chassis MIBs.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Configuration Management MIB (mib-jnx-cfgmgmt) | <p>Provides notification for configuration changes and rescue configuration changes in the form of SNMP traps. Each trap contains the time at which the configuration change was committed, the name of the user who made the change, and the method by which the change was made.</p> <p>A history of the last 32 configuration changes is kept in jnxCmChgEventTable.</p> <p><b>NOTE:</b> On the QFabric system, these conditions apply:</p> <ul style="list-style-type: none"> <li>All scalar variables under the jnxCmCfgChg table are supported.</li> <li>Supported scalar OIDs are jnxCmCfgChgLatestIndex, jnxCmCfgChgLatestTime, jnxCmCfgChgLatestDate, jnxCmCfgChgLatestSource, jnxCmCfgChgLatestUser, and jnxCmCfgChgMaxEventEntries.</li> <li>Scalar variables under the jnxCmRescueChg table are not supported.</li> </ul> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-cfgmgmt.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-cfgmgmt.txt</a>.</p> <p>For more information, see Configuration Management MIB.</p> |



**Table 483: Juniper Networks Enterprise-Specific MIBs Supported on QFabric Systems (*continued*)**

| MIB                                                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Fabric Chassis MIB<br>(mib-jnx-fabric-chassis)        | <p>Provides hardware information about the QFabric system and its component devices. This MIB is based on the Juniper Networks enterprise-specific Chassis MIB but adds another level of indexing that provides information for QFabric system component devices.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-fabric-chassis.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-fabric-chassis.txt</a>.</p> <p>For more information, see "Fabric Chassis MIB" on page 5464.</p>                                                                           |
| Host Resources MIB<br>(mib-jnx-hostresources)         | <p>Extends the hrStorageTable object, providing a measure of the usage of each file system on the switch as a percentage. Previously, the objects in the hrStorageTable measured the usage in allocation units—hrStorageUsed and hrStorageAllocationUnits—only. Using the percentage measurement, you can more easily monitor and apply thresholds on usage.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-hostresources.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-hostresources.txt</a>.</p> <p>For more information, see Host Resources MIB.</p> |
| Interface MIB (Extensions)<br>(mib-jnx-if-extensions) | <p>Extends the standard ifTable (RFC 2863) with additional statistics and Juniper Networks enterprise-specific chassis information in the ifJnxTable and ifChassisTable tables.</p> <p><b>NOTE:</b> On the QFabric system, scalar variables are not supported.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-if-extensions.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-if-extensions.txt</a>.</p> <p>For more information, see Interface MIB.</p>                                                                                                    |
| Power Supply Unit MIB<br>(mib-jnx-power-supply-unit)  | <p>Provides support for environmental monitoring of the power supply unit for the Interconnect device of the QFabric system.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-power-supply-unit.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-power-supply-unit.txt</a>.</p> <p>For more information, see Power Supply Unit MIB.</p> <p><b>NOTE:</b> On the QFabric system, scalar variables for the jnxPsuObjects 1 object ID in the jnxPsuScalars table are not supported.</p>                                                                          |
| QFabric MIB (jnx-qf-smi)                              | <p>Explains how the Juniper Networks enterprise-specific QFabric MIBs are structured. Defines the MIB objects that are reported by the QFabric system and the contents of the traps that can be issued by the QFabric system.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-qf-smi.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-qf-smi.txt</a>.</p>                                                                                                                                                                                                   |



**Table 483: Juniper Networks Enterprise-Specific MIBs Supported on QFabric Systems (*continued*)**

| MIB                        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Utility MIB (mib-jnx-util) | <p>Provides you with SNMP MIB container objects of the following types: 32-bit counters, 64-bit counters, signed integers, unsigned integers, and octet strings. You can use these objects to store data that can be retrieved using other SNMP operations.</p> <p>For a downloadable version of this MIB, see <a href="http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-util.txt">http://www.juniper.net/techpubs/en_US/junos12.3/topics/reference/mibs/mib-jnx-util.txt</a>.</p> <p>For more information, see “Utility MIB” on page 5467 and “Using the Enterprise-Specific Utility MIB to Enhance SNMP Coverage” on page 5735.</p> |

**Related Documentation**

- SNMP MIBs and Traps Reference
- [Standard SNMP MIBs on page 5475](#)
- [Juniper Networks Enterprise-Specific SNMP Version 1 Traps on page 5498](#)
- [Juniper Networks Enterprise-Specific SNMP Version 2 Traps on page 5500](#)

**MIB Objects for the QFX Series**

This topic lists the Juniper Networks enterprise-specific SNMP Chassis MIB definition objects for the QFX Series:

- [QFX3500 and QFX3600 Switches on page 5491](#)
- [QFabric Systems on page 5491](#)
- [QFabric System Node Devices on page 5491](#)
- [QFabric System QFX3008-I Interconnect Device on page 5491](#)
- [QFabric System QFX3600-I Interconnect Device on page 5492](#)
- [Virtual Chassis \(Control Plane Switch\) on page 5492](#)



### QFX3500 and QFX3600 Switches

```

jnxProductLineQFXSwitch      OBJECT IDENTIFIER ::= { jnxProductLine      82 }
jnxProductNameQFXSwitch      OBJECT IDENTIFIER ::= { jnxProductName      82 }
jnxProductModelQFXSwitch     OBJECT IDENTIFIER ::= { jnxProductModel     82 }
jnxProductVariationQFXSwitch OBJECT IDENTIFIER ::= { jnxProductVariation 82 }
  jnxProductQFX3500s         OBJECT IDENTIFIER ::= { jnxProductVariationQFXSwitch 1 }
  jnxProductQFX360016QS      OBJECT IDENTIFIER ::= { jnxProductVariationQFXSwitch 2 }

jnxChassisQFXSwitch          OBJECT IDENTIFIER ::= { jnxChassis          82 }

jnxSlotQFXSwitch             OBJECT IDENTIFIER ::= { jnxSlot             82 }
  jnxQFXSwitchSlotFPC        OBJECT IDENTIFIER ::= { jnxSlotQFXSwitch    1 }
  jnxQFXSwitchSlotHM         OBJECT IDENTIFIER ::= { jnxSlotQFXSwitch    2 }
  jnxQFXSwitchSlotPower      OBJECT IDENTIFIER ::= { jnxSlotQFXSwitch    3 }
  jnxQFXSwitchSlotFan        OBJECT IDENTIFIER ::= { jnxSlotQFXSwitch    4 }
  jnxQFXSwitchSlotFPB        OBJECT IDENTIFIER ::= { jnxSlotQFXSwitch    5 }

jnxMediaCardSpaceQFXSwitch   OBJECT IDENTIFIER ::= { jnxMediaCardSpace  82 }
  jnxQFXSwitchMediaCardSpacePIC OBJECT IDENTIFIER ::= { jnxMediaCardSpaceQFXSwitch 1 }

```

### QFabric Systems

```

jnxProductLineQFX3000        OBJECT IDENTIFIER ::= { jnxProductLine 84 }
jnxProductNameQFX3000        OBJECT IDENTIFIER ::= { jnxProductName 84 }
jnxProductModelQFX3000       OBJECT IDENTIFIER ::= { jnxProductModel 84 }
jnxProductVariationQFX3000   OBJECT IDENTIFIER ::= { jnxProductVariation 84 }
  jnxProductQFX3000-G         OBJECT IDENTIFIER ::= { jnxProductVariationQFX3000 1 }
  jnxProductQFX3000-M         OBJECT IDENTIFIER ::= { jnxProductVariationQFX3000 2 }
jnxChassisQFX3000            OBJECT IDENTIFIER ::= { jnxChassis      84 }

```

### QFabric System Node Devices

```

jnxProductLineQFXNode        OBJECT IDENTIFIER ::= { jnxProductLine 61 }
jnxProductNameQFXNode        OBJECT IDENTIFIER ::= { jnxProductName 61 }
jnxProductModelQFXNode       OBJECT IDENTIFIER ::= { jnxProductModel 61 }
jnxProductVariationQFXNode   OBJECT IDENTIFIER ::= { jnxProductVariation 61 }
  jnxProductQFX3500          OBJECT IDENTIFIER ::= { jnxProductVariationQFXNode 1 }
  jnxProductQFX360016Q       OBJECT IDENTIFIER ::= { jnxProductVariationQFXNode 3 }

jnxChassisQFXNode            OBJECT IDENTIFIER ::= { jnxChassis        61 }

jnxSlotQFXNode               OBJECT IDENTIFIER ::= { jnxSlot           61 }
  jnxQFXNodeSlotFPC          OBJECT IDENTIFIER ::= { jnxSlotQFXNode     1 }
  jnxQFXNodeSlotHM           OBJECT IDENTIFIER ::= { jnxSlotQFXNode     2 }
  jnxQFXNodeSlotPower        OBJECT IDENTIFIER ::= { jnxSlotQFXNode     3 }
  jnxQFXNodeSlotFan          OBJECT IDENTIFIER ::= { jnxSlotQFXNode     4 }
  jnxQFXNodeSlotFPB          OBJECT IDENTIFIER ::= { jnxSlotQFXNode     5 }

jnxMediaCardSpaceQFXNode     OBJECT IDENTIFIER ::= { jnxMediaCardSpace 61 }
  jnxQFXNodeMediaCardSpacePIC OBJECT IDENTIFIER ::= { jnxMediaCardSpaceQFXNode 1 }

```

### QFabric System QFX3008-I Interconnect Device

```

jnxProductLineQFXInterconnect OBJECT IDENTIFIER ::= { jnxProductLine 60 }
jnxProductNameQFXInterconnect OBJECT IDENTIFIER ::= { jnxProductName 60 }
jnxProductModelQFXInterconnect OBJECT IDENTIFIER ::= { jnxProductModel 60 }
jnxProductVariationQFXInterconnect OBJECT IDENTIFIER ::= { jnxProductVariation 60 }

```



```

jnxProductQFX3008          OBJECT IDENTIFIER ::= { jnxProductVariationQFXInterconnect 1 }

jnxChassisQFXInterconnect  OBJECT IDENTIFIER ::= { jnxChassis          60 }

jnxSlotQFXInterconnect     OBJECT IDENTIFIER ::= { jnxSlot          60 }
  jnxQFXInterconnectSlotFPC OBJECT IDENTIFIER ::= { jnxSlotQFXInterconnect 1 }
  jnxQFXInterconnectSlotHM  OBJECT IDENTIFIER ::= { jnxSlotQFXInterconnect 2 }
  jnxQFXInterconnectSlotPower OBJECT IDENTIFIER ::= { jnxSlotQFXInterconnect 3 }
  jnxQFXInterconnectSlotFan  OBJECT IDENTIFIER ::= { jnxSlotQFXInterconnect 4 }
  jnxQFXInterconnectSlotCBD  OBJECT IDENTIFIER ::= { jnxSlotQFXInterconnect 5 }
  jnxQFXInterconnectSlotFPB  OBJECT IDENTIFIER ::= { jnxSlotQFXInterconnect 6 }

jnxMediaCardSpaceQFXInterconnect OBJECT IDENTIFIER ::= { jnxMediaCardSpace 60 }
  jnxQFXInterconnectMediaCardSpacePIC OBJECT IDENTIFIER ::= { jnxMediaCardSpaceQFXInterconnect 1 }

jnxMidplaneQFXInterconnect  OBJECT IDENTIFIER ::= { jnxBackplane          60 }

```

### QFabric System QFX3600-I Interconnect Device

```

jnxProductLineQFXMInterconnect OBJECT IDENTIFIER ::= { jnxProductLine 91 }
jnxProductNameQFXMInterconnect OBJECT IDENTIFIER ::= { jnxProductName 91 }
jnxProductModelQFXMInterconnect OBJECT IDENTIFIER ::= { jnxProductModel 91 }
jnxProductVariationQFXMInterconnect OBJECT IDENTIFIER ::= { jnxProductVariation 91 }
  jnxProductQFX3600I          OBJECT IDENTIFIER ::= { jnxProductVariationQFXMInterconnect 1 }

jnxChassisQFXMInterconnect     OBJECT IDENTIFIER ::= { jnxChassis          91 }

jnxSlotQFXMInterconnect        OBJECT IDENTIFIER ::= { jnxSlot          91 }
  jnxQFXMInterconnectSlotFPC   OBJECT IDENTIFIER ::= { jnxSlotQFXMInterconnect 1 }
  jnxQFXMInterconnectSlotHM    OBJECT IDENTIFIER ::= { jnxSlotQFXMInterconnect 2 }
  jnxQFXMInterconnectSlotPower OBJECT IDENTIFIER ::= { jnxSlotQFXMInterconnect 3 }
  jnxQFXMInterconnectSlotFan    OBJECT IDENTIFIER ::= { jnxSlotQFXMInterconnect 4 }
  jnxQFXMInterconnectSlotFPB   OBJECT IDENTIFIER ::= { jnxSlotQFXMInterconnect 5 }

jnxMediaCardSpaceQFXMInterconnect OBJECT IDENTIFIER ::= { jnxMediaCardSpace 91 }
  jnxQFXMInterconnectMediaCardSpacePIC OBJECT IDENTIFIER ::= { jnxMediaCardSpaceQFXMInterconnect 1 }

```

### Virtual Chassis (Control Plane Switch)

```

jnxProductLineQFXJVRE          OBJECT IDENTIFIER ::= { jnxProductLine 62 }
jnxProductNameQFXJVRE          OBJECT IDENTIFIER ::= { jnxProductName 62 }
jnxProductModelQFXJVRE         OBJECT IDENTIFIER ::= { jnxProductModel 62 }
jnxChassisQFXJVRE              OBJECT IDENTIFIER ::= { jnxChassis      62 }

jnxSlotQFXJVRE                 OBJECT IDENTIFIER ::= { jnxSlot          62 }
  jnxQFXJVRESlotFPC             OBJECT IDENTIFIER ::= { jnxSlotQFXJVRE 1 }
  jnxQFXJVRESlotHM              OBJECT IDENTIFIER ::= { jnxSlotQFXJVRE 2 }
  jnxQFXJVRESlotPower           OBJECT IDENTIFIER ::= { jnxSlotQFXJVRE 3 }
  jnxQFXJVRESlotFan             OBJECT IDENTIFIER ::= { jnxSlotQFXJVRE 4 }
  jnxQFXJVRESlotFPB            OBJECT IDENTIFIER ::= { jnxSlotQFXJVRE 5 }

jnxMediaCardSpaceQFXJVRE       OBJECT IDENTIFIER ::= { jnxMediaCardSpace 62 }
  jnxQFXJVREMediaCardSpacePIC   OBJECT IDENTIFIER ::= { jnxMediaCardSpaceQFXJVRE 1 }

```

## Standard SNMP Version 1 Traps

Table 484 on page 5493 lists the standard traps for SNMP Version 1 supported by the QFX Series. The traps are organized first by trap category and then by trap name. The system



logging severity levels are listed for those traps that have them with their corresponding system log tag. Traps that do not have corresponding system logging severity levels are marked with an en dash (–) in the table.



**NOTE:** SNMPv1 traps are not supported on QFabric systems.

**Table 484: Standard SNMP Version 1 Traps Supported**

| Defined in                                                                                            | Trap Name                    | Enterprise ID    | Generic Trap Number | Specific Trap Number | System Logging Severity Level | Syslog Tag                        |
|-------------------------------------------------------------------------------------------------------|------------------------------|------------------|---------------------|----------------------|-------------------------------|-----------------------------------|
| <b>Startup Notifications</b>                                                                          |                              |                  |                     |                      |                               |                                   |
| RFC 1215,<br><i>Conventions for Defining Traps for Use with the SNMP</i>                              | <b>authenticationFailure</b> | 1.3.6.1.4.1.2636 | 4                   | 0                    | Notice                        | SNMPD_TRAP_GEN_FAILURE            |
|                                                                                                       | <b>coldStart</b>             | 1.3.6.1.4.1.2636 | 0                   | 0                    | Critical                      | SNMPD_TRAP_COLD_START             |
|                                                                                                       | <b>warmStart</b>             | 1.3.6.1.4.1.2636 | 1                   | 0                    | Error                         | SNMPD_TRAP_WARM_START             |
| <b>Link Notifications</b>                                                                             |                              |                  |                     |                      |                               |                                   |
| RFC 1215,<br><i>Conventions for Defining Traps for Use with the SNMP</i>                              | <b>linkDown</b>              | 1.3.6.1.4.1.2636 | 2                   | 0                    | Warning                       | SNMP_TRAP_LINK_DOWN               |
|                                                                                                       | <b>linkUp</b>                | 1.3.6.1.4.1.2636 | 3                   | 0                    | Info                          | SNMP_TRAP_LINK_UP                 |
| <b>Remote Operations Notifications</b>                                                                |                              |                  |                     |                      |                               |                                   |
| RFC 2925,<br><i>Definitions of Managed Objects for Remote Ping, Traceroute, and Lookup Operations</i> | <b>pingProbeFailed</b>       | 1.3.6.1.2.1.80.0 | 6                   | 1                    | Info                          | SNMP_TRAP_PING_PROBE_FAILED       |
|                                                                                                       | <b>pingTestFailed</b>        | 1.3.6.1.2.1.80.0 | 6                   | 2                    | Info                          | SNMP_TRAP_PING_TEST_FAILED        |
|                                                                                                       | <b>pingTestCompleted</b>     | 1.3.6.1.2.1.80.0 | 6                   | 3                    | Info                          | SNMP_TRAP_PING_TEST_COMPLETED     |
|                                                                                                       | <b>traceRoutePathChange</b>  | 1.3.6.1.2.1.81.0 | 6                   | 1                    | Info                          | SNMP_TRAP_TRACE_ROUTE_PATH_CHANGE |
|                                                                                                       | <b>traceRouteTestFailed</b>  | 1.3.6.1.2.1.81.0 | 6                   | 2                    | Info                          | SNMP_TRAP_TRACE_ROUTE_TEST_FAILED |



Table 484: Standard SNMP Version 1 Traps Supported (*continued*)

| Defined in                   | Trap Name                      | Enterprise ID       | Generic Trap Number | Specific Trap Number | System Logging Severity Level | Syslog Tag                           |
|------------------------------|--------------------------------|---------------------|---------------------|----------------------|-------------------------------|--------------------------------------|
|                              | <b>traceRouteTestCompleted</b> | 1.3.6.1.2.1.81.0    | 6                   | 3                    | Info                          | SNMP_TRAP_TRACE_ROUTE_TEST_COMPLETED |
| <b>RMON Alarms</b>           |                                |                     |                     |                      |                               |                                      |
| RFC 2819a, <i>RMON MIB</i>   | <b>fallingAlarm</b>            | 1.3.6.1.2.1.16      | 6                   | 2                    | —                             | —                                    |
|                              | <b>risingAlarm</b>             | 1.3.6.1.2.1.16      | 6                   | 1                    | —                             | —                                    |
| <b>Routing Notifications</b> |                                |                     |                     |                      |                               |                                      |
| <i>BGP 4 MIB</i>             | <b>bgpEstablished</b>          | 1.3.6.1.2.1.15.7    | 6                   | 1                    | —                             | —                                    |
|                              | <b>bgpBackwardTransition</b>   | 1.3.6.1.2.1.15.7    | 6                   | 2                    | —                             | —                                    |
| <i>OSPF TRAP MIB</i>         | <b>ospfVirtIfStateChange</b>   | 1.3.6.1.2.1.14.16.2 | 6                   | 1                    | —                             | —                                    |
|                              | <b>ospfNbrStateChange</b>      | 1.3.6.1.2.1.14.16.2 | 6                   | 2                    | —                             | —                                    |
|                              | <b>ospfVirtNbrStateChange</b>  | 1.3.6.1.2.1.14.16.2 | 6                   | 3                    | —                             | —                                    |
|                              | <b>ospfIfConfigError</b>       | 1.3.6.1.2.1.14.16.2 | 6                   | 4                    | —                             | —                                    |
|                              | <b>ospfVirtIfConfigError</b>   | 1.3.6.1.2.1.14.16.2 | 6                   | 5                    | —                             | —                                    |
|                              | <b>ospfIfAuthFailure</b>       | 1.3.6.1.2.1.14.16.2 | 6                   | 6                    | —                             | —                                    |
|                              | <b>ospfIfRxBadPacket</b>       | 1.3.6.1.2.1.14.16.2 | 6                   | 8                    | —                             | —                                    |
|                              | <b>ospfVirtIfRxBadPacket</b>   | 1.3.6.1.2.1.14.16.2 | 6                   | 9                    | —                             | —                                    |
|                              | <b>ospfVirtIfRxBadPacket</b>   | 1.3.6.1.2.1.14.16.2 | 6                   | 9                    | —                             | —                                    |
|                              | <b>ospfTxRetransmit</b>        | 1.3.6.1.2.1.14.16.2 | 6                   | 10                   | —                             | —                                    |
|                              | <b>ospfVirtIfTxRetransmit</b>  | 1.3.6.1.2.1.14.16.2 | 6                   | 11                   | —                             | —                                    |
|                              | <b>ospfMaxAgeLsa</b>           | 1.3.6.1.2.1.14.16.2 | 6                   | 13                   | —                             | —                                    |
|                              | <b>ospfIfStateChange</b>       | 1.3.6.1.2.1.14.16.2 | 6                   | 16                   | —                             | —                                    |
| <b>VRRP Notifications</b>    |                                |                     |                     |                      |                               |                                      |



Table 484: Standard SNMP Version 1 Traps Supported (*continued*)

| Defined in                                                                                 | Trap Name                  | Enterprise ID  | Generic Trap Number | Specific Trap Number | System Logging Severity Level | Syslog Tag              |
|--------------------------------------------------------------------------------------------|----------------------------|----------------|---------------------|----------------------|-------------------------------|-------------------------|
| RFC 2787, <i>Definitions of Managed Objects for the Virtual Router Redundancy Protocol</i> | <b>vrrpTrapNewMaster</b>   | 1.3.6.1.2.1.68 | 6                   | 1                    | Warning                       | VRRPD_NEW_MASTER_TRAP   |
|                                                                                            | <b>vrrpTrapAuthFailure</b> | 1.3.6.1.2.1.68 | 6                   | 2                    | Warning                       | VRRPD_AUTH_FAILURE_TRAP |

**Related Documentation**

- [Standard SNMP Version 2 Traps on page 5495](#)

## Standard SNMP Version 2 Traps

Standard SNMP Version 2 (v2) traps are supported on QFX3500 and QFX3600 switches, and QFabric systems. For more information, see:

- [Table 485 on page 5495](#) for traps supported on QFX3500 and QFX3600 switches.
- [Table 486 on page 5497](#) for traps supported on QFabric systems.

Table 485: Standard SNMPv2 Traps Supported on QFX3500 and QFX3600 Switches

| Defined in                                                                                                    | Trap Name                    | SNMP Trap OID       | System Logging Severity Level | Syslog Tag                  |
|---------------------------------------------------------------------------------------------------------------|------------------------------|---------------------|-------------------------------|-----------------------------|
| <b>Startup Notifications</b>                                                                                  |                              |                     |                               |                             |
| RFC 1907, <i>Management Information Base for Version 2 of the Simple Network Management Protocol (SNMPv2)</i> | <b>coldStart</b>             | 1.3.6.1.6.3.1.1.5.1 | Critical                      | SNMPD_TRAP_COLD_START       |
|                                                                                                               | <b>warmStart</b>             | 1.3.6.1.6.3.1.1.5.2 | Error                         | SNMPD_TRAP_WARM_START       |
|                                                                                                               | <b>authenticationFailure</b> | 1.3.6.1.6.3.1.1.5.5 | Notice                        | SNMPD_TRAP_GEN_FAILURE      |
| <b>Link Notifications</b>                                                                                     |                              |                     |                               |                             |
| RFC 2863, <i>The Interfaces Group MIB</i>                                                                     | <b>linkDown</b>              | 1.3.6.1.6.3.1.1.5.3 | Warning                       | SNMP_TRAP_LINK_DOWN         |
|                                                                                                               | <b>linkUp</b>                | 1.3.6.1.6.3.1.1.5.4 | Info                          | SNMP_TRAP_LINK_UP           |
| <b>Remote Operations Notifications</b>                                                                        |                              |                     |                               |                             |
| RFC 2925, <i>Definitions of Managed Objects for</i>                                                           | <b>pingProbeFailed</b>       | 1.3.6.1.2.1.80.0.1  | Info                          | SNMP_TRAP_PING_PROBE_FAILED |



Table 485: Standard SNMPv2 Traps Supported on QFX3500 and QFX3600 Switches (*continued*)

| Defined in                                            | Trap Name                      | SNMP Trap OID      | System Logging Severity Level | Syslog Tag                           |
|-------------------------------------------------------|--------------------------------|--------------------|-------------------------------|--------------------------------------|
| <i>Remote Ping, Traceroute, and Lookup Operations</i> | <b>pingTestFailed</b>          | 1.3.6.1.2.1.80.0.2 | Info                          | SNMP_TRAP_PING_TEST_FAILED           |
|                                                       | <b>pingTestCompleted</b>       | 1.3.6.1.2.1.80.0.3 | Info                          | SNMP_TRAP_PING_TEST_COMPLETED        |
|                                                       | <b>traceRoutePathChange</b>    | 1.3.6.1.2.1.81.0.1 | Info                          | SNMP_TRAP_TRACE_ROUTE_PATH_CHANGE    |
|                                                       | <b>traceRouteTestFailed</b>    | 1.3.6.1.2.1.81.0.2 | Info                          | SNMP_TRAP_TRACE_ROUTE_TEST_FAILED    |
|                                                       | <b>traceRouteTestCompleted</b> | 1.3.6.1.2.1.81.0.3 | Info                          | SNMP_TRAP_TRACE_ROUTE_TEST_COMPLETED |
| <b>RMON Alarms</b>                                    |                                |                    |                               |                                      |
| RFC 2819a, <i>RMON MIB</i>                            | <b>fallingAlarm</b>            | 1.3.6.1.2.1.16.0.1 | –                             | –                                    |
|                                                       | <b>risingAlarm</b>             | 1.3.6.1.2.1.16.0.2 | –                             | –                                    |
| <b>Routing Notifications</b>                          |                                |                    |                               |                                      |
| <i>BGP 4 MIB</i>                                      | <b>bgpEstablished</b>          | 1.3.6.1.2.1.15.7.1 | –                             | –                                    |
|                                                       | <b>bgpBackwardTransition</b>   | 1.3.6.1.2.1.15.7.2 | –                             | –                                    |



**Table 485: Standard SNMPv2 Traps Supported on QFX3500 and QFX3600 Switches (continued)**

| Defined in                                                                                 | Trap Name                     | SNMP Trap OID          | System Logging Severity Level | Syslog Tag              |
|--------------------------------------------------------------------------------------------|-------------------------------|------------------------|-------------------------------|-------------------------|
| <i>OSPF Trap MIB</i>                                                                       | <b>ospfVirtIfStateChange</b>  | 1.3.6.1.2.1.14.16.2.1  | –                             | –                       |
|                                                                                            | <b>ospfNbrStateChange</b>     | 1.3.6.1.2.1.14.16.2.2  | –                             | –                       |
|                                                                                            | <b>ospfVirtNbrStateChange</b> | 1.3.6.1.2.1.14.16.2.3  | –                             | –                       |
|                                                                                            | <b>ospfIfConfigError</b>      | 1.3.6.1.2.1.14.16.2.4  | –                             | –                       |
|                                                                                            | <b>ospfVirtIfConfigError</b>  | 1.3.6.1.2.1.14.16.2.5  | –                             | –                       |
|                                                                                            | <b>ospfIfAuthFailure</b>      | 1.3.6.1.2.1.14.16.2.6  | –                             | –                       |
|                                                                                            | <b>ospfVirtIfAuthFailure</b>  | 1.3.6.1.2.1.14.16.2.7  | –                             | –                       |
|                                                                                            | <b>ospfIfRxBadPacket</b>      | 1.3.6.1.2.1.14.16.2.8  | –                             | –                       |
|                                                                                            | <b>ospfVirtIfRxBadPacket</b>  | 1.3.6.1.2.1.14.16.2.9  | –                             | –                       |
|                                                                                            | <b>ospfTxRetransmit</b>       | 1.3.6.1.2.1.14.16.2.10 | –                             | –                       |
|                                                                                            | <b>ospfVirtIfTxRetransmit</b> | 1.3.6.1.2.1.14.16.2.11 | –                             | –                       |
|                                                                                            | <b>ospfMaxAgeLsa</b>          | 1.3.6.1.2.1.14.16.2.13 | –                             | –                       |
|                                                                                            | <b>ospfIfStateChange</b>      | 1.3.6.1.2.1.14.16.2.16 | –                             | –                       |
| <i>RFC 2787, Definitions of Managed Objects for the Virtual Router Redundancy Protocol</i> | <b>vrrpTrapNewMaster</b>      | 1.3.6.1.2.1.68.0.1     | Warning                       | VRRPD_NEWMASTER_TRAP    |
|                                                                                            | <b>vrrpTrapAuthFailure</b>    | 1.3.6.1.2.1.68.0.2     | Warning                       | VRRPD_AUTH_FAILURE_TRAP |

**Table 486: Standard SNMPv2 Traps Supported on QFabric Systems**

| Defined in                                                               | Trap Name        | SNMP Trap OID       | System Logging Severity Level | Syslog Tag            |
|--------------------------------------------------------------------------|------------------|---------------------|-------------------------------|-----------------------|
| <b>Startup Notifications</b>                                             |                  |                     |                               |                       |
| <i>RFC 1907, Management Information Base for Version 2 of the Simple</i> | <b>coldStart</b> | 1.3.6.1.6.3.1.1.5.1 | Critical                      | SNMPD_TRAP_COLD_START |



Table 486: Standard SNMPv2 Traps Supported on QFabric Systems (*continued*)

| Defined in                                  | Trap Name                    | SNMP Trap OID       | System Logging Severity Level | Syslog Tag             |
|---------------------------------------------|------------------------------|---------------------|-------------------------------|------------------------|
| <i>Network Management Protocol (SNMPv2)</i> | <b>warmStart</b>             | 1.3.6.1.6.3.1.1.5.2 | Error                         | SNMPD_TRAP_WARM_START  |
|                                             | <b>authenticationFailure</b> | 1.3.6.1.6.3.1.1.5.5 | Notice                        | SNMPD_TRAP_GEN_FAILURE |
| <b>Link Notifications</b>                   |                              |                     |                               |                        |
| <i>RFC 2863, The Interfaces Group MIB</i>   | <b>linkDown</b>              | 1.3.6.1.6.3.1.1.5.3 | Warning                       | SNMP_TRAP_LINK_DOWN    |
|                                             | <b>linkUp</b>                | 1.3.6.1.6.3.1.1.5.4 | Info                          | SNMP_TRAP_LINK_UP      |

**Related Documentation** • [Standard SNMP Version 1 Traps on page 5492](#)

### Juniper Networks Enterprise-Specific SNMP Version 1 Traps

Table 487 on page 5498 lists the standard SNMP Version 1 (v1) traps supported on the QFX3500 and QFX3600 switches. The traps are organized first by trap category and then by trap name. The system logging severity levels are listed for those traps that have them. Traps that do not have corresponding system logging severity levels are marked with an en dash (–).



**NOTE:** SNMPv1 traps are not supported on the QFabric system.

Table 487: Enterprise-Specific SNMPv1 Traps Supported on QFX3500 and QFX3600 Switches

| Defined in                                      | Trap Name             | Enterprise ID        | Generic Trap Number | Specific Trap Number | System Logging Severity Level | System Log Tag     |
|-------------------------------------------------|-----------------------|----------------------|---------------------|----------------------|-------------------------------|--------------------|
| <b>Chassis Notifications (Alarm Conditions)</b> |                       |                      |                     |                      |                               |                    |
| <i>Chassis MIB (jnx-chassis. mib)</i>           | jnxPowerSupplyFailure | 1.3.6.1.4.1.2636.4.1 | 6                   | 1                    | Warning                       | CHASSISD_SNMP_TRAP |
|                                                 | jnxFanFailure         | 1.3.6.1.4.1.2636.4.1 | 6                   | 2                    | Critical                      | CHASSISD_SNMP_TRAP |
|                                                 | jnxOverTemperature    | 1.3.6.1.4.1.2636.4.1 | 6                   | 3                    | Alert                         | CHASSISD_SNMP_TRAP |
|                                                 | jnxFruRemoval         | 1.3.6.1.4.1.2636.4.1 | 6                   | 5                    | Notice                        | CHASSISD_SNMP_TRAP |



**Table 487: Enterprise-Specific SNMPv1 Traps Supported on QFX3500 and QFX3600 Switches (continued)**

| Defined in                                                  | Trap Name                          | Enterprise ID        | Generic Trap Number | Specific Trap Number | System Logging Severity Level | System Log Tag     |
|-------------------------------------------------------------|------------------------------------|----------------------|---------------------|----------------------|-------------------------------|--------------------|
|                                                             | jnxFruInsertion                    | 1.3.6.1.4.1.2636.4.1 | 6                   | 6                    | Notice                        | CHASSISD_SNMP_TRAP |
|                                                             | jnxFruPowerOff                     | 1.3.6.1.4.1.2636.4.1 | 6                   | 7                    | Notice                        | CHASSISD_SNMP_TRAP |
|                                                             | jnxFruPowerOn                      | 1.3.6.1.4.1.2636.4.1 | 6                   | 8                    | Notice                        | CHASSISD_SNMP_TRAP |
|                                                             | jnxFruFailed                       | 1.3.6.1.4.1.2636.4.1 | 6                   | 9                    | Warning                       | CHASSISD_SNMP_TRAP |
|                                                             | jnxFruOffline                      | 1.3.6.1.4.1.2636.4.1 | 6                   | 10                   | Notice                        | CHASSISD_SNMP_TRAP |
|                                                             | jnxFruOnline                       | 1.3.6.1.4.1.2636.4.1 | 6                   | 11                   | Notice                        | CHASSISD_SNMP_TRAP |
|                                                             | jnxFruCheck                        | 1.3.6.1.4.1.2636.4.1 | 6                   | 12                   | Warning                       | CHASSISD_SNMP_TRAP |
|                                                             | jnxPowerSupplyOk                   | 1.3.6.1.4.1.2636.4.2 | 6                   | 1                    | Critical                      | CHASSISD_SNMP_TRAP |
|                                                             | jnxFanOK                           | 1.3.6.1.4.1.2636.4.2 | 6                   | 2                    | Critical                      | CHASSISD_SNMP_TRAP |
|                                                             | jnxTemperatureOK                   | 1.3.6.1.4.1.2636.4.2 | 6                   | 3                    | Alert                         | CHASSISD_SNMP_TRAP |
| <b>Configuration Notifications</b>                          |                                    |                      |                     |                      |                               |                    |
| <i>Configuration Management MIB</i><br>(jnx-configmgmt.mib) | jnxCmCfgChange                     | 1.3.6.1.4.1.2636.4.5 | 6                   | 1                    | –                             | –                  |
|                                                             | jnxCmRescueChange                  | 1.3.6.1.4.1.2636.4.5 | 6                   | 2                    | –                             | –                  |
| <b>Remote Operations</b>                                    |                                    |                      |                     |                      |                               |                    |
| <i>Ping MIB</i><br>(jnx-ping.mib)                           | jnxPingRttThresholdExceeded        | 1.3.6.1.4.1.2636.4.9 | 6                   | 1                    | –                             | –                  |
|                                                             | jnxPingRttStdDevThreshold Exceeded | 1.3.6.1.4.1.2636.4.9 | 6                   | 2                    | –                             | –                  |
|                                                             | jnxPingRttJitterThreshold Exceeded | 1.3.6.1.4.1.2636.4.9 | 6                   | 3                    | –                             | –                  |



**Table 487: Enterprise-Specific SNMPv1 Traps Supported on QFX3500 and QFX3600 Switches (continued)**

| Defined in                        | Trap Name                             | Enterprise ID        | Generic Trap Number | Specific Trap Number | System Logging Severity Level | System Log Tag |
|-----------------------------------|---------------------------------------|----------------------|---------------------|----------------------|-------------------------------|----------------|
|                                   | jnxPingEgressThresholdExceeded        | 1.3.6.1.4.1.2636.4.9 | 6                   | 4                    | –                             | –              |
|                                   | jnxPingEgressStdDevThresholdExceeded  | 1.3.6.1.4.1.2636.4.9 | 6                   | 5                    | –                             | –              |
|                                   | jnxPingEgressJitterThresholdExceeded  | 1.3.6.1.4.1.2636.4.9 | 6                   | 6                    | –                             | –              |
|                                   | jnxPingIngressThresholdExceeded       | 1.3.6.1.4.1.2636.4.9 | 6                   | 7                    | –                             | –              |
|                                   | jnxPingIngressStddevThresholdExceeded | 1.3.6.1.4.1.2636.4.9 | 6                   | 8                    | –                             | –              |
|                                   | jnxPingIngressJitterThresholdExceeded | 1.3.6.1.4.1.2636.4.9 | 6                   | 9                    | –                             | –              |
| <b>RMON Alarms</b>                |                                       |                      |                     |                      |                               |                |
| <i>RMON MIB</i><br>(jnx-rmon.mib) | jnxRmonAlarmGetFailure                | 1.3.6.1.4.1.2636.4.3 | 6                   | 1                    | –                             | –              |
|                                   | jnxRmonGetOk                          | 1.3.6.1.4.1.2636.4.3 | 6                   | 2                    | –                             | –              |

- Related Documentation**
- [Standard SNMP MIBs on page 5475](#)
  - [Juniper Networks Enterprise-Specific MIBs on page 5484](#)
  - [Juniper Networks Enterprise-Specific SNMP Version 2 Traps on page 5500](#)

## Juniper Networks Enterprise-Specific SNMP Version 2 Traps

Juniper Networks enterprise-specific SNMP Version 2 (v2) traps are supported on QFX3500 and QFX3600 switches, and QFabric systems. For more information, see:

- [Table 488 on page 5501](#) for traps supported on QFX3500 and QFX3600 switches.
- [Table 489 on page 5503](#) for traps supported on QFabric systems.

The traps are organized first by trap category and then by trap name. The system logging severity levels are listed for those traps that have them. Traps that do not have corresponding system logging severity levels are marked with an en dash (–).



Table 488: Enterprise-Specific SNMPv2 Traps Supported on QFX3500 and QFX3600 Switches

| Source MIB                                      | Trap Name             | SNMP Trap OID           | System Logging Severity Level | System Log Tag     |
|-------------------------------------------------|-----------------------|-------------------------|-------------------------------|--------------------|
| <b>Chassis (Alarm Conditions) Notifications</b> |                       |                         |                               |                    |
| <i>Chassis MIB</i><br>(mib-jnx-chassis)         | jnxPowerSupplyFailure | 1.3.6.1.4.1.2636.4.1.1  | Alert                         | CHASSISD_SNMP_TRAP |
|                                                 | jnxFanFailure         | 1.3.6.1.4.1.2636.4.1.2  | Critical                      | CHASSISD_SNMP_TRAP |
|                                                 | jnxOverTemperature    | 1.3.6.1.4.1.2636.4.1.3  | Critical                      | CHASSISD_SNMP_TRAP |
|                                                 | jnxFruRemoval         | 1.3.6.1.4.1.2636.4.1.5  | Notice                        | CHASSISD_SNMP_TRAP |
|                                                 | jnxFruInsertion       | 1.3.6.1.4.1.2636.4.1.6  | Notice                        | CHASSISD_SNMP_TRAP |
|                                                 | jnxFruPowerOff        | 1.3.6.1.4.1.2636.4.1.7  | Notice                        | CHASSISD_SNMP_TRAP |
|                                                 | jnxFruPowerOn         | 1.3.6.1.4.1.2636.4.1.8  | Notice                        | CHASSISD_SNMP_TRAP |
|                                                 | jnxFruFailed          | 1.3.6.1.4.1.2636.4.1.9  | Warning                       | CHASSISD_SNMP_TRAP |
|                                                 | jnxFruOffline         | 1.3.6.1.4.1.2636.4.1.10 | Notice                        | CHASSISD_SNMP_TRAP |
|                                                 | jnxFruOnline          | 1.3.6.1.4.1.2636.4.1.11 | Notice                        | CHASSISD_SNMP_TRAP |
|                                                 | jnxFruCheck           | 1.3.6.1.4.1.2636.4.1.12 | Notice                        | CHASSISD_SNMP_TRAP |
|                                                 | jnxPowerSupplyOK      | 1.3.6.1.4.1.2636.4.2.1  | Critical                      | CHASSISD_SNMP_TRAP |
|                                                 | jnxFanOK              | 1.3.6.1.4.1.2636.4.2.2  | Critical                      | CHASSISD_SNMP_TRAP |
|                                                 | jnxTemperatureOK      | 1.3.6.1.4.1.2636.4.2.3  | Alert                         | CHASSISD_SNMP_TRAP |
| <b>Configuration Notifications</b>              |                       |                         |                               |                    |



**Table 488: Enterprise-Specific SNMPv2 Traps Supported on QFX3500 and QFX3600 Switches (continued)**

| Source MIB                                               | Trap Name                              | SNMP Trap OID            | System Logging Severity Level | System Log Tag |
|----------------------------------------------------------|----------------------------------------|--------------------------|-------------------------------|----------------|
| <i>Configuration Management MIB</i><br>(mib-jnx-cfgmgmt) | jnxCmCfgChange                         | 1.3.6.1.4.1.2636.4.5.0.1 | –                             | –              |
|                                                          | jnxCmRescueChange                      | 1.3.6.1.4.1.2636.4.5.0.2 | –                             | –              |
| <b>Remote Operations Notifications</b>                   |                                        |                          |                               |                |
| <i>Ping MIB</i><br>(mib-jnx-ping)                        | jnxPingRttThreshold Exceeded           | 1.3.6.1.4.1.2636.4.9.0.1 | –                             | –              |
|                                                          | jnxPingRttStdDevThreshold Exceeded     | 1.3.6.1.4.1.2636.4.9.0.2 | –                             | –              |
|                                                          | jnxPingRttJitterThreshold Exceeded     | 1.3.6.1.4.1.2636.4.9.0.3 | –                             | –              |
|                                                          | jnxPingEgressThreshold Exceeded        | 1.3.6.1.4.1.2636.4.9.0.4 | –                             | –              |
|                                                          | jnxPingEgressStdDevThreshold Exceeded  | 1.3.6.1.4.1.2636.4.9.0.5 | –                             | –              |
|                                                          | jnxPingEgressJitterThreshold Exceeded  | 1.3.6.1.4.1.2636.4.9.0.6 | –                             | –              |
|                                                          | jnxPingIngressThreshold Exceeded       | 1.3.6.1.4.1.2636.4.9.0.7 | –                             | –              |
|                                                          | jnxPingIngressStddevThreshold Exceeded | 1.3.6.1.4.1.2636.4.9.0.8 | –                             | –              |
|                                                          | jnxPingIngressJitterThreshold Exceeded | 1.3.6.1.4.1.2636.4.9.0.9 | –                             | –              |
| <b>RMON Alarms</b>                                       |                                        |                          |                               |                |
| <i>RMON MIB</i><br>(mib-jnx-rmon)                        | jnxRmonAlarmGetFailure                 | 1.3.6.1.4.1.2636.4.3.0.1 | –                             | –              |
|                                                          | jnxRmonGetOk                           | 1.3.6.1.4.1.2636.4.3.0.2 | –                             | –              |



Table 489: Enterprise-Specific SNMPv2 Traps Supported on QFabric Systems

| Source MIB                                            | Trap Name                                                      | SNMP Trap OID            | System Logging Severity Level | System Log Tag |
|-------------------------------------------------------|----------------------------------------------------------------|--------------------------|-------------------------------|----------------|
| <i>Fabric Chassis MIB</i><br>(mib-jnx-fabric-chassis) | <b>Fabric Chassis (Alarm Conditions) Notifications</b>         |                          |                               |                |
|                                                       | jnxFabricPowerSupplyFailure                                    | 1.3.6.1.4.1.2636.4.19.1  | Warning                       | –              |
|                                                       | jnxFabricFanFailure                                            | 1.3.6.1.4.1.2636.4.19.2  | Critical                      | –              |
|                                                       | jnxFabricOverTemperature                                       | 1.3.6.1.4.1.2636.4.19.3  | Alert                         | –              |
|                                                       | jnxFabricRedundancySwitchover                                  | 1.3.6.1.4.1.2636.4.19.4  | Notice                        | –              |
|                                                       | jnxFabricFruRemoval                                            | 1.3.6.1.4.1.2636.4.19.5  | Notice                        | –              |
|                                                       | jnxFabricFruInsertion                                          | 1.3.6.1.4.1.2636.4.19.6  | Notice                        | –              |
|                                                       | jnxFabricFruPowerOff                                           | 1.3.6.1.4.1.2636.4.19.7  | Notice                        | –              |
|                                                       | jnxFabricFruPowerOn                                            | 1.3.6.1.4.1.2636.4.19.8  | Notice                        | –              |
|                                                       | jnxFabricFruFailed                                             | 1.3.6.1.4.1.2636.4.19.9  | Warning                       | –              |
|                                                       | jnxFabricFruOffline                                            | 1.3.6.1.4.1.2636.4.19.10 | Notice                        | –              |
|                                                       | jnxFabricFruOnline                                             | 1.3.6.1.4.1.2636.4.19.11 | Notice                        | –              |
|                                                       | jnxFabricFruCheck                                              | 1.3.6.1.4.1.2636.4.19.12 | Warning                       | –              |
|                                                       | jnxFabricFEBSwitchover                                         | 1.3.6.1.4.1.2636.4.19.13 | Warning                       | –              |
|                                                       | jnxFabricHardDiskFailed                                        | 1.3.6.1.4.1.2636.4.19.14 | Warning                       | –              |
|                                                       | jnxFabricHardDiskMissing                                       | 1.3.6.1.4.1.2636.4.19.15 | Warning                       | –              |
|                                                       | jnxFabricBootFromBackup                                        | 1.3.6.1.4.1.2636.4.19.16 | Warning                       | –              |
|                                                       | <b>Fabric Chassis (Alarm Cleared Conditions) Notifications</b> |                          |                               |                |
|                                                       | jnxFabricPowerSupplyOK                                         | 1.3.6.1.4.1.2636.4.20.1  | Critical                      | –              |
|                                                       | jnxFabricFanOK                                                 | 1.3.6.1.4.1.2636.4.20.2  | Critical                      | –              |
|                                                       | jnxFabricTemperatureOK                                         | 1.3.6.1.4.1.2636.4.20.3  | Alert                         | –              |
|                                                       | jnxFabricFruOK                                                 | 1.3.6.1.4.1.2636.4.20.4  | –                             | –              |



Table 489: Enterprise-Specific SNMPv2 Traps Supported on QFabric Systems (*continued*)

| Source MIB                                               | Trap Name                              | SNMP Trap OID             | System Logging Severity Level | System Log Tag |
|----------------------------------------------------------|----------------------------------------|---------------------------|-------------------------------|----------------|
| <i>QFabric MIB</i><br>(mib-jnx-qf-smi)                   | <b>QFabric MIB Notifications</b>       |                           |                               |                |
|                                                          | jnxQFabricDownloadIssued               | 1.3.6.1.4.1.2636.42.1.0.1 | –                             | –              |
|                                                          | jnxQFabricDownloadFailed               | 1.3.6.1.4.1.2636.42.1.0.2 | –                             | –              |
|                                                          | jnxQFabricDownloadSucceeded            | 1.3.6.1.4.1.2636.42.1.0.3 | –                             | –              |
|                                                          | jnxQFabricUpgradeIssued                | 1.3.6.1.4.1.2636.42.1.0.4 | –                             | –              |
|                                                          | jnxQFabricUpgradeFailed                | 1.3.6.1.4.1.2636.42.1.0.5 | –                             | –              |
|                                                          | jnxQFabricUpgradeSucceeded             | 1.3.6.1.4.1.2636.42.1.0.6 | –                             | –              |
| <b>Configuration Notifications</b>                       |                                        |                           |                               |                |
| <i>Configuration Management MIB</i><br>(mib-jnx-cfgmgmt) | jnxCmCfgChange                         | 1.3.6.1.4.1.2636.4.5.0.1  | –                             | –              |
|                                                          | jnxCmRescueChange                      | 1.3.6.1.4.1.2636.4.5.0.2  | –                             | –              |
| <b>Remote Operations Notifications</b>                   |                                        |                           |                               |                |
| <i>Ping MIB</i><br>(mib-jnx-ping)                        | jnxPingRttThreshold Exceeded           | 1.3.6.1.4.1.2636.4.9.0.1  | –                             | –              |
|                                                          | jnxPingRttStdDevThreshold Exceeded     | 1.3.6.1.4.1.2636.4.9.0.2  | –                             | –              |
|                                                          | jnxPingRttJitterThreshold Exceeded     | 1.3.6.1.4.1.2636.4.9.0.3  | –                             | –              |
|                                                          | jnxPingEgressThreshold Exceeded        | 1.3.6.1.4.1.2636.4.9.0.4  | –                             | –              |
|                                                          | jnxPingEgressStdDevThreshold Exceeded  | 1.3.6.1.4.1.2636.4.9.0.5  | –                             | –              |
|                                                          | jnxPingEgressJitterThreshold Exceeded  | 1.3.6.1.4.1.2636.4.9.0.6  | –                             | –              |
|                                                          | jnxPingIngressThreshold Exceeded       | 1.3.6.1.4.1.2636.4.9.0.7  | –                             | –              |
|                                                          | jnxPingIngressStddevThreshold Exceeded | 1.3.6.1.4.1.2636.4.9.0.8  | –                             | –              |
|                                                          | jnxPingIngressJitterThreshold Exceeded | 1.3.6.1.4.1.2636.4.9.0.9  | –                             | –              |



- Related Documentation**
- [Standard SNMP MIBs on page 5475](#)
  - [Juniper Networks Enterprise-Specific MIBs on page 5484](#)
  - [Juniper Networks Enterprise-Specific SNMP Version 1 Traps on page 5498](#)

## System Log Messages

---

- [Overview of Junos OS System Log Messages on page 5505](#)
- [Overview of Single-Chassis System Logging Configuration on page 5505](#)
- [Understanding the Implementation of System Log Messages on the QFabric System on page 5507](#)

### Overview of Junos OS System Log Messages

The Junos OS, running on the QFX Series, generates system log messages (also called *syslog messages*) to record events that occur on the switch, including the following:

- Routine operations, such as a user login into the configuration database.
- Failure and error conditions, such as failure to access a configuration file.
- Emergency or critical conditions, such as power-down of the switch due to excessive temperature.

Each system log message identifies the Junos OS process that generated the message and briefly describes the operation or error that occurred. For detailed information about specific system log messages, see the *Junos OS System Log Messages Reference*.

- Related Documentation**
- [Junos OS System Log Configuration Statements on page 5551](#)
  - [Junos OS Minimum System Logging Configuration on page 5551](#)

### Overview of Single-Chassis System Logging Configuration

The Junos OS system logging utility on the QFX Series is similar to the UNIX **syslogd** utility. This topic describes how to configure system logging for a single-chassis system that runs the Junos OS.

Each system log message belongs to a *facility*, which groups together related messages. Each message is also preassigned a *severity level*, which indicates how seriously the triggering event affects router functions. You always specify the facility and severity of the messages to include in the log. For more information, see “[Specifying the Facility and Severity of Messages to Include in the Log](#)” on page 5565.

You direct messages to one or more destinations by including the appropriate statement at the **[edit system syslog]** hierarchy level:



- To a named file in a local file system, by including the **file** statement. See [“Directing System Log Messages to a Log File” on page 5553](#).
- To the terminal session of one or more specific users (or all users) when they are logged in to the switch, by including the **user** statement. See [“Directing System Log Messages to a User Terminal” on page 5554](#).
- To the switch console, by including the **console** statement. See [“Directing System Log Messages to the Console” on page 5555](#).
- To a remote machine that is running the **syslogd** utility, by including the **host** statement. See [“Directing System Log Messages to a Remote Machine” on page 5554](#).

By default, messages are logged in a standard format, which is based on a UNIX system log format; for detailed information about message formatting, see the *Junos OS System Log Messages Reference*. You can alter the content and format of logged messages in the following ways:

- You can log messages to a file in structured-data format instead of the standard Junos OS format. Structured-data format provides more information without adding significant length, and makes it easier for automated applications to extract information from the message. For more information, see [“Logging Messages in Structured-Data Format” on page 5559](#).
- A message's facility and severity level are together referred to as its *priority*. By default, the standard Junos OS format for messages does not include priority information (structured-data format includes a priority code by default). To include priority information in standard-format messages directed to a file or a remote destination, include the **explicit-priority** statement. For more information, see [“Including Priority Information in System Log Messages” on page 5557](#).
- By default, the standard Junos OS format for messages specifies the month, date, hour, minute, and second when the message was logged. You can modify the timestamp on standard-format system log messages to include the year, the millisecond, or both. (Structured-data format specifies the year and millisecond by default.) For more information, see [“Including the Year or Millisecond in Timestamps” on page 5558](#).
- When directing messages to a remote machine, you can specify the IP address that is reported in messages as their source. You can also configure features that make it easier to separate messages generated by Junos OS or messages generated on particular switches. For more information, see [“Directing System Log Messages to a Remote Machine” on page 5554](#).
- The predefined facilities group together related messages, but you can also use regular expressions to specify more exactly which messages from a facility are logged to a file, a user terminal, or a remote destination. For more information, see [“Using Regular Expressions to Refine the Set of Logged Messages” on page 5570](#).



**NOTE:** During a commit check, warnings about the **traceoptions** configuration (for example, mismatch in trace file sizes or number of trace files) are not displayed on the console. However, these warnings are logged in the system log messages when the new configuration is committed.

---



### Related Documentation

- [Examples: Configuring System Logging on page 5509](#)
- [Specifying the Facility and Severity of Messages to Include in the Log on page 5565](#)
- [Junos OS System Logging Facilities and Message Severity Levels on page 5566](#)
- [Directing System Log Messages to a Log File on page 5553](#)
- [Directing System Log Messages to a Remote Machine on page 5554](#)
- [Directing System Log Messages to a User Terminal on page 5554](#)
- [Directing System Log Messages to the Console on page 5555](#)

## Understanding the Implementation of System Log Messages on the QFabric System

This topic provides an overview of system log messages (syslog) as implemented on the QFabric system.

The QFabric system monitors events that occur on its component devices and distributes system log messages about those events to all external system log message servers (hosts) that are configured. Messages are stored in the QFabric system database for viewing only using the **show log** command. Component devices may include Node devices, Interconnect devices, Director devices, and the Virtual Chassis.

You configure system log messages by using the **host** and **file** statements at the **[edit system syslog]** hierarchy level. Use the **show log filename** operational mode command to view the messages.



**NOTE:** On the QFabric system, a syslog file named **messages** is configured implicitly with facility and severity levels of **any any** and a file size of 100 MB. If you do not specify a filename, you can use the default filename **messages** with the **show log** command.

The QFabric system supports the following system log message features:

- The **file filename** and **host hostname** statements at the **[edit system syslog]** hierarchy level are supported. Other statements at that hierarchy level are not supported.
- You can specify the maximum amount of data that is displayed when you issue the **show log filename** command by configuring the **file filename archive maximum-file-size** statement.
- You can specify one or more system log message servers to receive messages, which are sent to each server that is configured.
- If you configured an alias for a device or interface, the alias is displayed in the message for the device or interface.



- The level of detail that is included in a message depends on the facility and severity levels that are configured. Messages include the highest level of detail available for the configured facility and severity levels.
- Time resolution is supported in seconds, and data in milliseconds is not available. If you attempt to configure milliseconds support, the log output displays the data as **000**.

Unsupported syslog features include:

- File access to syslog messages
- Syslog output in the structured data format
- Monitoring of syslog messages

**Related  
Documentation**

- [Example: Configuring System Log Messages on page 5512](#)
- [syslog \(QFabric System\) on page 5719](#)



## CHAPTER 63

# Configuration

- [Configuration Examples on page 5509](#)
- [Configuration Tasks for Network Management on page 5521](#)
- [Configuration Tasks for Automation Scripts on page 5524](#)
- [Configuration Tasks for Fabric OAM on page 5527](#)
- [Configuration Tasks for sFlow Technology on page 5532](#)
- [Configuration Tasks for SNMP on page 5533](#)
- [Configuration Tasks for System Log Messages on page 5550](#)
- [Configuration Statements for Network Management on page 5573](#)
- [Configuration Statements for Automation Scripts on page 5580](#)
- [Configuration Statements for Fabric OAM on page 5598](#)
- [Configuration Statements for sFlow Technology on page 5610](#)
- [Configuration Statements for SNMP on page 5618](#)
- [Configuration Statements for System Log Messages on page 5703](#)

## Configuration Examples

---

- [Examples: Configuring System Logging on page 5509](#)
- [Examples: Assigning an Alternative Facility on page 5511](#)
- [Example: Configuring System Log Messages on page 5512](#)
- [Example: Monitoring Network Traffic Using sFlow Technology on page 5514](#)
- [Example: Configuring SNMP on page 5518](#)

### Examples: Configuring System Logging

The system log provides an excellent way of tracking all management activity on the switch by recording events such as user authentication, access authorization, and command execution. Logged command executions include commands entered by users at the CLI prompt or by client applications such as the Junos XML protocol or NETCONF XML client. Because system log files contain information about commands executed on the switch and the user who executed the commands, checking system log files for failed authentication events can help identify attempts to hack in to the switch. You can also



analyze network activity by correlating executed commands with events and changes that occurred on the network at a particular time.

System log files are stored locally on the switch in the default `/var/log` directory.

The following example shows how to configure system log messages to record all commands entered by users and all authentication or authorization attempts. Logged commands include those entered by users at the CLI prompt and by client applications. Authentication and authorization attempts include events that are saved in the file named **cli-commands** and those that are sent to the terminal of a user who is logged in.

```
[edit system]
syslog {
  file cli-commands {
    interactive-commands info;
    authorization info;
  }
  user * {
    interactive-commands info;
    authorization info;
  }
}
```

The following example shows how to log all alarms state changes to the file `/var/log/alarms`:

```
[edit system]
syslog {
  file alarms {
    kernel warning;
  }
}
```

The following example shows how to configure the handling of messages of various types, as described in the comments. Information is logged to two files, to the terminal of user **alex**, to a remote machine, and to the console:

```
[edit system]
syslog {
  /* write all security-related messages to file /var/log/security */
  file security {
    authorization info;
    interactive-commands info;
  }
  /* write messages about potential problems to file /var/log/messages: */
  /* messages from "authorization" facility at level "notice" and above, */
  /* messages from all other facilities at level "warning" and above */
  file messages {
    authorization notice;
    any warning;
  }
  /* write all messages at level "critical" and above to terminal of user
  "alex" if */
  /* that user is logged in */
  user alex {
```



```

        any critical;
    }
    /* write all messages from the &ldquo;daemon&rdquo; facility at level &ldquo;info&rdquo;
       and above, and */
    /* messages from all other facilities at level &ldquo;warning&rdquo; and above, to the
       */
    /* machine monitor.mycompany.com */
    host monitor.mycompany.com {
        daemon info;
        any warning;
    }
    /* write all messages at level &ldquo;error&rdquo; and above to the system console */
    console {
        any error;
    }
}

```

The following example shows how to configure the handling of messages generated when users issue Junos OS CLI commands, by specifying the **interactive-commands** facility at the **info**, **notice**, and **warning** severity levels:

```

[edit system]
file user-actions {
    interactive-commands info;
}
user philip {
    interactive-commands notice;
}
console {
    interactive-commands warning;
}
}

```

The following list describes the security levels used in the example:

- **info**—Logs a message when users issue any command at the CLI operational or configuration mode prompt. The example writes the messages to the file `/var/log/user-actions`.
- **notice**—Logs a message when users issue the configuration mode commands **rollback** and **commit**. The example writes the messages to the terminal of user **philip**.
- **warning**—Logs a message when users issue a command that restarts a software process. The example writes the messages to the console.

#### Related Documentation

- [Overview of Single-Chassis System Logging Configuration on page 5505](#)

### Examples: Assigning an Alternative Facility

This topic contains examples of configuring system log messages to use an alternative facility for logging.



The following example shows how to log all messages generated on the switch at the **error** level or higher to the **local0** facility on the remote host called **monitor.mycompany.com**:

```
[edit system syslog]
host monitor.mycompany.com {
  any error;
  facility-override local0;
}
```

The following example contains two sets of statements that show how to configure switches located in California and in New York to send messages to a single remote host called **central-logger.mycompany.com**. The messages from California are assigned to alternative facility **local0** and the messages from New York are assigned to alternative facility **local2**.

- The following statements configure the California switch to aggregate messages in the **local0** facility:

```
[edit system syslog]
host central-logger.mycompany.com {
  change-log info;
  facility-override local0;
}
```

- The following statements configure the New York switch to aggregate messages in the **local2** facility:

```
[edit system syslog]
host central-logger.mycompany.com {
  change-log info;
  facility-override local2;
}
```

On the remote host named **central-logger** you can subsequently configure the system logging utility to write messages from the **local0** facility to one file (for example, **california-config**) and the messages from the **local2** facility to another file (for example, **new-york-config**).

#### Related Documentation

- [Junos OS System Log Alternate Facilities for Remote Logging on page 5568](#)

### Example: Configuring System Log Messages

The QFabric system monitors events that occur on its component devices and distributes system log messages about those events to all external system log message servers (hosts) that are configured. Messages are stored in the QFabric system database for viewing only using the **show log** command. Component devices may include Node devices, Interconnect devices, Director devices, and the Virtual Chassis.



This example describes how to configure system log messages on the QFabric system.

- [Requirements on page 5513](#)
- [Overview on page 5513](#)
- [Configuration on page 5513](#)

## Requirements

This example uses the following hardware and software components:

- Junos OS Release 12.2
- QFabric system
- External servers that can be configured as system log message hosts

## Overview

Component devices that generate system log message events may include Node devices, Interconnect devices, Director devices, and the control plane switches. The following configuration example includes these components in the QFabric system:

- Director software running on the Director group
- Control plane switches
- Interconnect device
- Multiple Node devices

## Configuration

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set system syslog host 10.1.1.12 any error
set system syslog file qflogs
```

### Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure system messages from the QFabric Director device:

1. Specify a host, any facility, and the **error** severity level.

```
[edit system syslog]
user@switch# set host 10.1.1.12 any error
```



**NOTE:** You can configure more than one system log message server (host). The QFabric system sends the messages to each server configured.



- 
2. (Optional) Specify a filename to capture log messages.



**NOTE:** On the QFabric system, a syslog file named **messages** is configured implicitly with facility and severity levels of any any and a file size of 100 MBs. Therefore, you cannot specify the filename **messages** in your configuration, and automatic command completion does not work for that filename.

```
[edit system syslog]
user@switch# set file qflogs
```

**Results** From configuration mode, confirm your configuration by entering the **show system** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@switch# show system
syslog {
  file qflogs {
  }
  host 10.1.1.12 {
    any error;
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

## Example: Monitoring Network Traffic Using sFlow Technology

The sFlow technology is a monitoring technology for high-speed switched or routed networks. sFlow monitoring technology collects samples of network packets and sends them in a UDP datagram to a monitoring station called a *collector*. You can configure sFlow technology on a QFX Series device to monitor traffic continuously at wire speed on all interfaces simultaneously. You must enable sFlow monitoring on each interface individually; you cannot globally enable sFlow monitoring on all interfaces with a single configuration statement. Junos OS fully supports the sFlow technology standard described in RFC 3176, *InMon Corporation's sFlow: A Method for Monitoring Traffic in Switched and Routed Networks*.

This example describes how to configure and use sFlow monitoring on a QFX3500 switch in standalone mode.

- [Requirements on page 5515](#)
- [Overview on page 5515](#)
- [Configuration on page 5516](#)
- [Verification on page 5517](#)



## Requirements

This example uses the following hardware and software components:


- Junos OS Release 11.3 or later
- One QFX3500 switch

## Overview

An sFlow monitoring system consists of an sFlow agent embedded in the device and a centralized collector on the network. The two main activities of the sFlow agent are random sampling and statistics gathering. The sFlow agent combines interface counters and flow samples and sends them to the IP address and UDP destination port of the sFlow collector in UDP datagrams.

Figure 200 on page 5515 depicts the basic elements of an sFlow system.

Figure 200: sFlow Technology Monitoring System

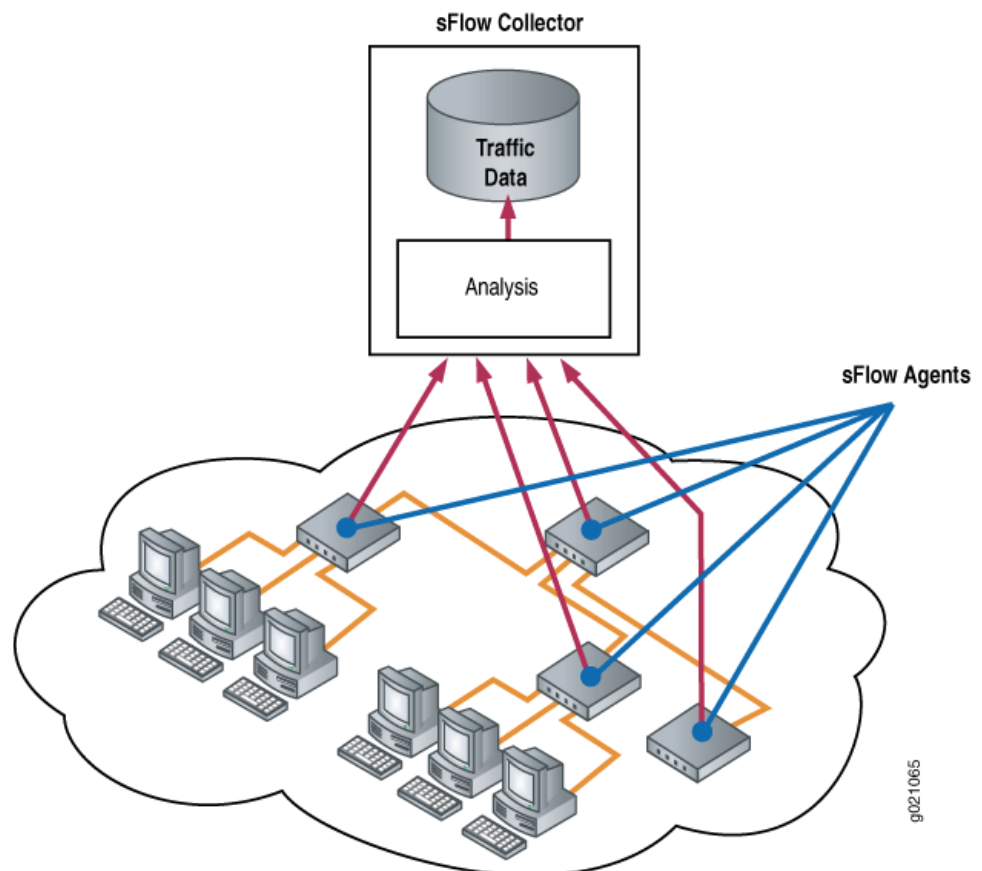



## Configuration

---

**CLI Quick Configuration** To quickly configure sFlow technology, copy the following commands and paste them into the terminal window of the switch:

```
[edit protocols sflow]
set collector 10.204.32.46 udp-port 5600
set interfaces xe-0/0/1.0
set polling-interval 20
set sample-rate 1000
```

**Step-by-Step Procedure** To configure sFlow features using the CLI:

1. Configure the IP address and UDP port of at least one collector:

```
[edit protocols sflow]
user@switch# set collector 10.204.32.46 udp-port 5600
```

The default UDP port assigned is 6343.

2. Enable sFlow technology on a specific interface:

```
[edit protocols sflow]
user@switch# set interfaces xe-0/0/1.0
```



**NOTE:** You cannot enable sFlow technology on a Layer 3 VLAN-tagged interface.

You cannot enable sFlow technology on a LAG interface (for example, ae0), but you can enable sFlow technology on the member interfaces of the LAG (for example, xe-0/0/1).

3. Specify how often (in seconds) the sFlow agent polls all interfaces at the global level:

```
[edit protocols sflow]
user@switch# set polling-interval 20
```



**NOTE:** Specify 0 if you do not want to poll the interface.

4. Specify the rate at which packets must be sampled at the global level. The following example sets a sample rate of 1 in 1000 packets:

```
[edit protocols sflow]
user@switch# set sample-rate 1000
```

**Results** Check the results of the configuration:

```
[edit]
user@switch# show protocols
sflow {
  collector 10.204.32.46 {
    udp-port 5600;
```



```

}
interfaces xe-0/0/1.0 {
  polling-interval 20;
  sample-rate 1000;
}
}

```

### Verification

To confirm that the configuration is correct, perform these tasks:

- [Verifying That sFlow Technology Has Been Configured Properly on page 5517](#)
- [Verifying That sFlow Technology Is Enabled on an Interface on page 5517](#)
- [Verifying the sFlow Collector Configuration on page 5518](#)

#### *Verifying That sFlow Technology Has Been Configured Properly*

**Purpose** Verify that sFlow technology has been configured properly.

**Action** Enter the **show sflow** operational mode command:

```

user@switch> show sflow
sFlow          : Enabled
Sample limit    : 300 packets/second
Polling interval : 20 second
Sample rate     : 1:1000
Agent ID       : 10.1.1.2

```



**NOTE:** The sample limit cannot be configured and is set to 300 packets per second.

**Meaning** The output shows that sFlow technology is enabled and specifies the values for the sampling limit, polling interval, and sampling rate.

#### *Verifying That sFlow Technology Is Enabled on an Interface*

**Purpose** Verify that sFlow technology is enabled on interfaces and display the sampling parameters.

**Action** Enter the **show sflow interface** operational mode command:

```

user@switch> show sflow interface
Interface      Status      Sample    Polling
                rate      rate      interval
xe-0/0/1.0     Enabled    1000      20

```

**Meaning** The output indicates that sFlow technology is enabled on the **Node1:xe-0/0/1.0** interface on the Node device with a sampling rate of 1000 and a polling interval of 20 seconds.



### *Verifying the sFlow Collector Configuration*

**Purpose** Verify the sFlow collector configuration.

**Action** Enter the **show sflow collector** operational mode command:

```
user@switch> show sflow collector
Collector      Udp-port      No. of samples
address
10.204.32.46      5600          7516
```

**Meaning** The output displays the IP address of the collector, the UDP port, and the number of samples collected.

**Related Documentation**

- [Configuring sFlow Technology on page 5532](#)
- [Overview of sFlow Technology on page 5456](#)

## Example: Configuring SNMP

By default, SNMP is disabled on devices running Junos OS. This example describes the steps for configuring SNMP on the QFabric system.

- [Requirements on page 5518](#)
- [Overview on page 5518](#)
- [Configuration on page 5519](#)

### Requirements

---

This example uses the following hardware and software components:

- Junos OS Release 12.2
- Network management system (NMS) (running the SNMP manager)
- QFabric system (running the SNMP agent) with multiple Node devices

### Overview

---

Because SNMP is disabled by default on devices running Junos OS, you must enable SNMP on your device by including configuration statements at the **[edit snmp]** hierarchy level. At a minimum, you must configure the **community public** statement. The community defined as public grants read-only access to MIB data to any client.

If no **clients** statement is configured, all clients are allowed. We recommend that you always include the **restrict** option to limit SNMP client access to the switch.

The network topology in this example includes an NMS, a QFabric system with four Node devices, and external SNMP servers that are configured for receiving traps.



## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set snmp name "snmp qfabric" description "qfabric0 switch"
set snmp location "Lab 4 Row 11" contact "qfabric-admin@qfabric0"
set snmp community public authorization read-only
set snmp client-list list0 192.168.0.0/24
set snmp community public client-list-name list0
set snmp community public clients 192.170.0.0/24 restrict
set snmp trap-group "qf-traps" destination-port 155 targets 192.168.0.100
```

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode* in the CLI User Guide.

To configure SNMP on the QFabric system:



**NOTE:** If the name, description, location, contact, or community name contains spaces, enclose the text in quotation marks (" ").

1. Configure the SNMP system name:

```
[edit snmp]
user@switch# set name "snmp qfabric"
```

2. Specify a description.

```
[edit snmp]
user@switch# set description "qfabric0 system"
```

This string is placed into the MIB II sysDescription object.

3. Specify the physical location of the QFabric system.

```
[edit snmp]
user@switch# set location "Lab 4 Row 11"
```

This string is placed into the MIB II sysLocation object.

4. Specify an administrative contact for the SNMP system.

```
[edit snmp]
user@switch# set contact "qfabric-admin@qfabric0"
```

This name is placed into the MIB II sysContact object.

5. Specify a unique SNMP community name and the read-only authorization level.



**NOTE:** The read-write option is not supported on the QFabric system.



```
[edit snmp]
user@switch# set community public authorization read-only
```

6. Create a client list with a set of IP addresses that can use the SNMP community.

```
[edit snmp]
user@switch# set client-list list0 192.168.0.0/24
user@switch# set community public client-list-name list0
```

7. Specify IP addresses of clients that are restricted from using the community.

```
[edit snmp]
user@switch# set community public clients 192.170.0.0/24 restrict
```

8. Configure a trap group, destination port, and a target to receive the SNMP traps in the trap group.

```
[edit snmp]
user@switch# set trap-group "qf-traps" destination-port 155 targets 192.168.0.100
```



**NOTE:** You do not need to include the `destination-port` statement if you use the default port 162.

The trap group `qf-traps` is configured to send traps to 192.168.0.100.

**Results** From configuration mode, confirm your configuration by entering the **show** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@switch# show
snmp {
  name "snmp qfabric";
  description "qfabric0 system";
  location "Lab 4 Row 11";
  contact "qfabric-admin@qfabric0";
  client-list list0 {
    192.168.0.0/24;
  }
  community public {
    authorization read-only;
    clients {
      192.170.0.0/24 restrict;
    }
  }
  trap-group qf-traps {
    destination-port 155;
    targets {
      192.168.0.100;
    }
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.



- Related Documentation**
- [Understanding the Implementation of SNMP on the QFabric System on page 5461](#)
  - [snmp on page 1325](#)

## Configuration Tasks for Network Management

- [Configuring Console and Auxiliary Port Properties on page 5521](#)
- [Configuring SSH Service for Remote Access to the Router or Switch on page 5522](#)
- [Configuring Telnet Service for Remote Access to a Switch on page 5524](#)

### Configuring Console and Auxiliary Port Properties

The console port and auxiliary port on a switch provide out-of-band remote access to the switch. You can configure the console and auxiliary ports so that an external data terminal may be connected to the switch. The console port is enabled by default, and its speed is 9600 baud. The auxiliary port is disabled by default.

By default, terminal connections to the console and auxiliary ports are secure. When you configure the console and auxiliary ports as insecure, root logins are not allowed to establish terminal connections, and superusers and anyone with a user identifier (UID) of 0 are not allowed to establish terminal connections in multiuser mode.

To configure the console and auxiliary port properties on the switch:

1. To specify that the console port session should terminate if the connection to the data carrier is lost:

```
[edit system ports]
user@switch# set console log-out-on-disconnect
```

2. To specify the auxiliary port terminal type:

```
[edit system ports]
user@switch# set auxiliary type (ansi | small-xterm | vt100 | xterm)
```

For example, to specify the auxiliary port terminal type of **xterm** with a display of 80 columns by 65 rows:

```
[edit system ports]
user@switch# set auxiliary type xterm
```

3. To check the configuration:

```
[edit system ports]
user@switch# show
console log-out-on-disconnect;
auxiliary type xterm;
```

- Related Documentation**
- [auxiliary on page 210](#)
  - [console \(Physical Port\) on page 219](#)
  - [ports on page 245](#)



## Configuring SSH Service for Remote Access to the Router or Switch

To configure the router or switch to accept SSH as an access service, include the **ssh** statement at the **[edit system services]** hierarchy level:

```
[edit system services]
ssh {
  ciphers [ cipher-1 cipher-2 cipher-3 ...]
  client-alive-count-max number;
  client-alive-interval seconds;
  connection-limit limit;
  hostkey-algorithm <algorithm | no-algorithm>;
  key-exchange algorithm;
  macs algorithm;
  max-sessions-per-connection number;
  no-tcp-forwarding;
  protocol-version [v1 v2];
  rate-limit limit;
  root-login <allow | deny | deny-password>;
}
```

By default, the router or switch supports a limited number of simultaneous SSH sessions and connection attempts per minute. Use the following statements to change the defaults:

- **connection-limit *limit***—Maximum number of simultaneous connections per protocol (IPv4 and IPv6). The range is a value from 1 through 250. The default is 75. When you configure a connection limit, the limit is applicable to the number of SSH sessions per protocol (IPv4 and IPv6). For example, a connection limit of 10 allows 10 IPv6 SSH sessions and 10 IPv4 SSH sessions.
- **max-sessions-per-connection *number***—Include this statement to specify the maximum number of SSH sessions allowed per single SSH connection. This allows you to limit the number of cloned sessions tunneled within a single SSH connection. The default value is 10.
- **rate-limit *limit***—Maximum number of connection attempts accepted per minute (a value from 1 through 250). The default is 150. When you configure a rate limit, the limit is applicable to the number of connection attempts per protocol (IPv4 and IPv6). For example, a rate limit of 10 allows 10 IPv6 SSH session connection attempts per minute and 10 IPv4 SSH session connection attempts per minute.

For information about other configuration settings, see the following topics:

- [Configuring the Root Login Through SSH on page 5522](#)
- [Configuring the SSH Protocol Version on page 5523](#)
- [Configuring the Client Alive Mechanism on page 5523](#)

---

### Configuring the Root Login Through SSH

By default, users are allowed to log in to the router or switch as **root** through SSH. To control user access through SSH, include the **root-login** statement at the **[edit systems services ssh]** hierarchy level:



```
[edit system services ssh]
root-login (allow | deny | deny-password);
```

**allow**—Allows users to log in to the router or switch as root through SSH. The default is **allow**.

**deny**—Disables users from logging in to the router or switch as root through SSH.

**deny-password**—Allows users to log in to the router or switch as root through SSH when the authentication method (for example, RSA) does not require a password.

### Configuring the SSH Protocol Version

By default, both version 1 and version 2 of the SSH protocol are enabled. To configure the router or switch to use only version 1 of the SSH protocol, include the **protocol-version** statement and specify **v1** at the **[edit system services ssh]** hierarchy level:

```
[edit system services ssh]
protocol-version [ v1 ];
```

To configure the router or switch to use only version 2 of the SSH protocol, include the **protocol-version** statement and specify **v2** at the **[edit system services ssh]** hierarchy level:

```
[edit system services ssh]
protocol-version [ v2 ];
```

To explicitly configure the router or switch to use version 1 and 2 of the SSH protocol, include the **protocol-version** statement and specify **v1** and **v2** at the **[edit system services ssh]** hierarchy level:

```
[edit system services ssh]
protocol-version [ v1 v2 ];
```

For J Series Services Routers, the export license software supports SSH version 1 only.

### Configuring the Client Alive Mechanism

The client alive mechanism is valuable when the client or server depends on knowing when a connection has become inactive. It differs from the standard keepalive mechanism because the client alive messages are sent through the encrypted channel. The client alive mechanism is not enabled at default. To enable it, configure the **client-alive-count-max** and the **client-alive-interval**. This option applies to SSH protocol version 2 only.

In the following example, unresponsive SSH clients will be disconnected after approximately 100 seconds (20 x 5).

```
[edit system services ssh]
client-alive-count-max 5;
client-alive-interval 20;
```



## Configuring Telnet Service for Remote Access to a Switch

Telnet provides unencrypted access to network devices. Configuring Telnet service for a switch enables in-band remote access to the switch.

By default, the switch supports a limited number of simultaneous Telnet sessions and connection attempts per minute. Optionally, you can change the default Telnet settings by configuring the connection limit and rate limit at the **[edit system services telnet]** hierarchy level.

The connection limit is the maximum number of simultaneous connections per protocol (IPv4). The range is from 1 through 250. The default is 75.

The rate limit is the maximum number of connection attempts accepted per minute per protocol. The range is from 1 through 250. The default is 150.

To configure Telnet service:

1. To specify the connection limit:

```
[edit system services]
user@switch# set telnet connection-limit connection-limit
```

2. To specify the rate limit:

```
[edit system services]
user@switch# set telnet rate-limit rate-limit
```

3. Check that the Telnet connection limit and rate limit show the values you specified:

```
[edit system services]
user@switch# show
telnet {
  connection-limit 50;
  rate-limit 100;
}
```

---

## Configuration Tasks for Automation Scripts

- [Controlling the Execution of Commit Scripts on page 5524](#)

### Controlling the Execution of Commit Scripts

This document describes the tasks that affect the way commit scripts are executed. In the QFabric system, commit scripts are stored in the in the **/pbdata/mgd\_shared/partition-ip/var/db/scripts/commit** directory that is shared among Director devices in a Director group.

To determine which commit scripts are currently enabled on the QFabric system, use the **show** command to display the files included at the **[edit system scripts commit]** hierarchy level. To ensure that the enabled files are on the device, list the contents of the



`/pbdata/mgd_shared/partition-ip/var/db/scripts/commit` directory using the **file list** operational mode command.

See the following tasks:

- [Enabling Commit Scripts to Execute on page 5525](#)
- [Removing Commit Scripts from the Configuration on page 5525](#)
- [Deactivating Commit Scripts on page 5526](#)
- [Activating Inactive Commit Scripts on page 5526](#)

### Enabling Commit Scripts to Execute

The commit operation requires that all scripts be included in configuration at the **[edit system scripts commit file]** hierarchy level for all QFabric Director devices.

If you need to temporarily remove a script from a commit operation but do not want to remove it from the configuration permanently, you may configure the **optional** statement at the **[edit system scripts commit file filename]** hierarchy level to enable the commit operation to succeed even if a script is missing from the commit script directory.



**CAUTION:** When you include the **optional** statement at the **[edit system scripts commit file filename]** hierarchy level, no error message is generated during the commit operation if the file does not exist. As a result, you might not be aware that a script has not been executed as expected.

The filename of a commit script written in SLAX must include the **.slax** extension for the script to be executed.

To enable a commit script to execute during a commit operation:

1. Ensure that the commit script is located in the correct directory:  
`/pbdata/mgd_shared/partition-ip/var/db/scripts/commit` directory on the Director device.

2. Configure the commit script.

```
[edit system scripts commit]
user@switch# set file filename <optional>
```

3. Commit the configuration.

```
[edit system scripts commit]
user@switch# top
[edit]
user@switch# commit
```

### Removing Commit Scripts from the Configuration

You can prevent commit scripts from executing during a commit operation by removing the scripts from the commit directory in the configuration.





**NOTE:** You can also deactivate a script using the **deactivate** statement instead of removing it from the configuration. Deactivated scripts may be reactivated later.

To prevent a commit script from executing during a commit operation:

1. Delete the commit script file from the commit directory in the configuration.

```
[edit system scripts commit]
user@switch# delete file filename
```

2. Commit the configuration.

```
[edit system scripts commit]
user@switch# top
[edit]
user@switch# commit
```

3. Remove the commit script from the `/pbdata/mgd_shared/` directory on the Director device.



**BEST PRACTICE:** Although removing the commit script is not necessary, we recommend deleting unused files from the system.

---

## Deactivating Commit Scripts

Deactivating a commit script results in its being marked as inactive in the configuration. The script is not executed during the commit operation, but you can reactivate the script by using the **activate** statement.

To deactivate the commit script:

1. Deactivate the script.

```
[edit]
user@switch deactivate system scripts commit file filename
```

2. Commit your changes.

```
[edit]
user@switch# commit
```

3. Verify that the commit script is deactivated.

```
[edit]
user@switch# show system scripts commit
inactive: file mycommit.slax
```

---

## Activating Inactive Commit Scripts

Deactivating a commit script results in its being marked as inactive in the configuration and is therefore not executed during the commit operation.



To activate an inactive commit script:

1. Activate the script.

```
[edit]
user@switch# activate system scripts commit file filename
```

2. Commit your changes.

```
[edit]
user@switch# commit
```

## Configuration Tasks for Fabric OAM

- [Configuring a Fabric Maintenance Association on page 5527](#)
- [Configuring Flow Specifications on page 5528](#)

### Configuring a Fabric Maintenance Association

On a QFabric system, enabling internal fabric monitoring using the ping and traceroute operations requires that a fabric maintenance association (FMA) be configured in addition to a flow specification. The FMA associates a particular VLAN with a set of source and destination interfaces called fabric maintenance endpoints (FMEPs) that are used for tracing the flow path between the endpoints. Configuration of the VLAN name is mandatory.

Before configuring the FMA, configure a VLAN name (and not a VLAN ID) for the VLAN in which the internal fabric monitoring occurs. If you already configured a VLAN ID instead of a VLAN name, you must first delete the VLAN ID and then specify a VLAN name before you configure the FMA.



**NOTE:** Because each FMA and VLAN have a one-to-one correspondence, an FMA in each QFabric system must be given a unique name.

To configure an FMA:

1. Configure an FMA name that is unique within the QFabric system:

```
[edit protocols oam fabric]
user@host# set fabric-maintenance-associations fma-name
```

2. (Optional) Configure the FMA description:

```
[edit protocols oam fabric]
user@host# set fabric-maintenance-associations fma-name description string
```

3. Configure the VLAN name:

```
[edit protocols oam fabric]
user@host# set fabric-maintenance-associations fma-name vlan-name vlan-name
```

4. Configure an FMEP, including the identifier, name, description, and associated interface:

```
[edit protocols oam fabric]
```



```
user@host# set fabric-maintenance-associations fma-name
fabric-maintenance-end-points fmeop-id fmeop-name name description string
fmeop-interface interface-name
```

5. Repeat Step 4 to configure additional FMEPs.

**Related  
Documentation**

- [Overview of Internal Fabric Monitoring on page 5451](#)
- [Configuring Flow Specifications on page 5528](#)
- [fabric \(OAM\) on page 5599](#)
- [ping fabric multicast-flow on page 5757](#)
- [ping fabric unicast-flow on page 5759](#)
- [traceroute fabric unicast-flow on page 5806](#)

## Configuring Flow Specifications

On a QFabric system, enabling internal fabric monitoring using the ping and traceroute operations requires that a flow specification be configured in addition to a fabric maintenance association (FMA). A flow specification is used to determine the contents of the packet that is used for a particular operation. For example, an Ethernet type flow specification describes the contents of a pure Layer 2 packet, whereas an Ethernet IPv4 type flow specification describes an Ethernet IPv4 packet.



**NOTE:** In the flow specification configuration, some parameters are optional. If you do not configure the optional parameters, the system generates random values that are used as PDU contents.

In order to replicate actual traffic behavior, internal fabric monitoring requires that the following flow specification fields be filled with the same values as the traffic packets:

- Unicast Ethernet—Source MAC address, destination MAC address, Ethertype
- Unicast IPv4—Source IP address, destination IP address, source L4 port, destination L4 port, destination MAC address

The configuration for each flow specification type includes parameters specific to that particular type. Use one of the following procedures to configure the flow specification for your flow type:

- [Configuring a Unicast Ethernet Flow Specification on page 5529](#)
- [Configuring a Unicast Ethernet IPv4 Flow Specification on page 5530](#)
- [Configuring a Multicast IPv4 Flow Specification on page 5531](#)
- [Configuring a Multicast VLAN Flood Flow Specification on page 5531](#)



## Configuring a Unicast Ethernet Flow Specification

This procedure describes how to configure a flow specification for a unicast Ethernet flow type. This configuration is applicable for the unicast ping and traceroute operations.



**NOTE:** Some parameters are optional. If you do not configure the optional parameters, the system generates random values that are used as PDU contents.

In order to replicate actual traffic behavior, internal fabric monitoring requires that the following flow specification fields be filled with the same values as the traffic packets: source MAC address, destination MAC address, and Ethertype.

To configure a unicast Ethernet flow specification:

1. Configure a flow specification name:

```
[edit protocols oam fabric]
user@host# set flow-specs flow-specification-name
```

2. (Optional) Set the Ethernet frame size:

```
[edit protocols oam fabric]
user@host# set ethernet-frame-size ethernet-frame-size
```

3. Set the flow specification type as unicast Ethernet and specify the EtherType:

```
[edit protocols oam fabric flow-specs flow-specification-name]
user@host# set unicast-ethernet ethertype ethertype
```

4. (Optional) Set the MAC address and the MAC address range of the source FMEP:

```
[edit protocols oam fabric flow-specs flow-specification-name unicast-ethernet]
user@host# set source-mac source-mac-address source-mac-mask source-mac-mask
```



**NOTE:** Configuration of the source-mac and source-mac-mask parameters is optional, but the source-mac-mask parameter can be specified only if the source-mac parameter is also configured.

5. (Optional) Set the MAC address or address range mask for the destination FMEP:

```
[edit protocols oam fabric flow-specs flow-specification-name unicast-ethernet]
user@host# set destination-mac destination-mac-address destination-mac-mask destination-mac-mask
```



**NOTE:** Configuration of the destination-mac and destination-mac-mask parameters is optional, but the destination-mac-mask parameter can be specified only if the destination-mac parameter is also configured.



## Configuring a Unicast Ethernet IPv4 Flow Specification

This procedure describes how to configure a flow specification for a unicast Ethernet IPv4 flow type. This configuration is applicable for the unicast ping and traceroute operations.



**NOTE:** All parameters except the flow specification name are optional. If you do not configure the optional parameters, the system generates random values that are used as PDU contents.

In order to replicate actual traffic behavior, internal fabric monitoring requires that the following flow specification fields be filled with the same values as the traffic packets: source IP address, destination IP address, source L4 port, destination L4 port, destination MAC address.

To configure a unicast Ethernet IPv4 flow specification:

1. Configure a flow specification name:

```
[edit protocols oam fabric]
user@host# set flow-specs flow-specification-name
```

2. (Optional) Set the Ethernet frame size:

```
[edit protocols oam fabric flow-specs flow-specification-name]
user@host# set ethernet-frame-size size
```

3. Set the flow specification type as unicast Ethernet IPv4:

```
[edit protocols oam fabric flow-specs flow-specification-name]
user@host# set unicast-ethernet-ipv4
```

4. (Optional) Set the IPv4 address or the address range of the source FMEP:

```
[edit protocols oam fabric flow-specs flow-specification-name unicast-ethernet-ipv4]
user@host# set source-ip source-ip-address
```

or

```
[edit protocols oam fabric flow-specs flow-specification-name unicast-ethernet-ipv4]
user@host# set source-ip-mask source-ip-mask
```

5. (Optional) Set the IPv4 address or the address range of the destination FMEP:

```
[edit protocols oam fabric flow-specs flow-specification-name unicast-ethernet-ipv4]
user@host# set destination-ip destination-ip-address
```

or

```
[edit protocols oam fabric flow-specs flow-specification-name unicast-ethernet-ipv4]
user@host# set destination-ip-mask destination-ip-mask
```

6. (Optional) Set the IPv4 protocol type:

```
[edit protocols oam fabric flow-specs flow-specification-name unicast-ethernet-ipv4]
user@host# ip-protocol protocol
```

7. (Optional) Set the L4 port (TCP or UDP port number) of the source FMEP:



```
[edit protocols oam fabric flow-specs flow-specification-name unicast-ethernet-ipv4]
user@host# source-l4-port source-l4-port-number
```

8. (Optional) Set the L4 port of the destination FMEP:

```
[edit protocols oam fabric flow-specs flow-specification-name unicast-ethernet-ipv4]
user@host# destination-l4-port destination-l4-port-number
```

### Configuring a Multicast IPv4 Flow Specification

This procedure describes how to configure a flow specification for a multicast IPv4 flow type.



**NOTE:** Some parameters are optional. If you do not configure the optional parameters, the system generates random values that are used as PDU contents.

To configure a multicast IPv4 flow specification:

1. Configure a flow specification name:

```
[edit protocols oam fabric]
user@host# set flow-specs flow-specification-name
```

2. Set the flow specification type as multicast IPv4:

```
[edit protocols oam fabric flow-specification-name]
user@host# set multicast-ipv4
```

3. (Optional) Set the IPv4 address of the source FMEP:

```
[edit protocols oam fabric flow-specs flow-specification-name multicast-ipv4]
user@host# set source-ip ipv4-address
```

4. Set the IPv4 multicast group address:

```
[edit protocols oam fabric flow-specs flow-specification-name multicast-ipv4]
user@host# set dest-ip-multicast-group ipv4-mcast-address
```

### Configuring a Multicast VLAN Flood Flow Specification

This procedure describes how to configure a flow specification for a multicast VLAN flood flow type.

To configure a multicast VLAN flood flow specification:

1. Configure a flow specification name:

```
[edit protocols oam fabric]
user@host# set flow-specs flow-specification-name
```

2. Set the flow specification type as multicast VLAN flood:

```
[edit protocols oam fabric flow-specification-name]
user@host# set multicast-vlan-flood
```



**Related Documentation**

- [Overview of Internal Fabric Monitoring on page 5451](#)
- [Configuring a Fabric Maintenance Association on page 5527](#)
- [fabric \(OAM\) on page 5599](#)
- [ping fabric multicast-flow on page 5757](#)
- [ping fabric unicast-flow on page 5759](#)
- [traceroute fabric unicast-flow on page 5806](#)

---

## Configuration Tasks for sFlow Technology

---

- [Configuring sFlow Technology on page 5532](#)

### Configuring sFlow Technology

The sFlow technology is a monitoring technology for high-speed switched or routed networks. sFlow monitoring technology collects samples of network packets and sends them in a UDP datagram to a monitoring station called a *collector*. You can configure sFlow technology on a QFX Series device to monitor traffic continuously at wire speed on all interfaces simultaneously. You must enable sFlow monitoring on each interface individually; you cannot globally enable sFlow monitoring on all interfaces with a single configuration statement. Junos OS fully supports the sFlow technology standard described in RFC 3176, *InMon Corporation's sFlow: A Method for Monitoring Traffic in Switched and Routed Networks*.

On the QFabric system, the sFlow monitoring global configuration that is defined on the Director device is distributed to Node groups that have sFlow sampling configured on the interfaces.

To configure sFlow features using the CLI:

1. Configure the IP address and UDP port of at least one collector:

```
[edit protocols sflow]
user@host# set collector ip-address udp-port port-number
```

The default UDP port assigned is 6343.

2. Enable sFlow technology on a specific interface:

```
[edit protocols sflow]
user@host# set interfaces interface-name
```



**NOTE:** You cannot enable sFlow technology on a Layer 3 VLAN-tagged interface.

You cannot enable sFlow technology on a LAG interface (for example ae0), but you can enable sFlow technology on the member interfaces of the LAG (for example, xe-0/0/1).

3. Specify how often (in seconds) the sFlow agent polls all interfaces at the global level:



```
[edit protocols sflow]
user@host# set polling-interval seconds
```



**NOTE:** Specify 0 if you do not want to poll the interface.

4. Specify the rate at which packets are sampled at the global level. For example, configuring a **number** of 1000 sets a sample rate of 1 in 1000 packets.

```
[edit protocols sflow]
user@host# set sample-rate number
```

5. (Optional) You can also configure the polling interval and sample rate at the interface level:

```
[edit protocols sflow]
user@host# set interfaces interface-name polling-interval seconds sample-rate number
```



**NOTE:** The interface-level configuration overrides the global configuration for the specified interface.

#### Related Documentation

- [Example: Monitoring Network Traffic Using sFlow Technology on page 5514](#)
- [Overview of sFlow Technology on page 5456](#)

## Configuration Tasks for SNMP

- [Configuring SNMP on page 5534](#)
- [Configuring the SNMP Community String on page 5537](#)
- [Configuring SNMP Trap Groups on page 5538](#)
- [Adding a Group of Clients to an SNMP Community on page 5539](#)
- [Configuring the Interfaces on Which SNMP Requests Can Be Accepted on page 5540](#)
- [Configuring MIB Views on page 5541](#)
- [Configuring RMON Alarms and Events on page 5541](#)
- [Configuring Health Monitoring on page 5544](#)
- [Creating SNMPv3 Users on page 5544](#)
- [Configuring Access Privileges for a Group on page 5546](#)
- [Assigning a Security Name to a Group on page 5547](#)
- [Configuring SNMPv3 Traps on a Device Running Junos OS on page 5548](#)
- [Configuring SNMP Informs on page 5549](#)



## Configuring SNMP

SNMP is implemented in the Junos OS Software running on the QFX Series products. By default, SNMP is not enabled. To enable SNMP, you must include the SNMP configuration statements at the **[edit]** hierarchy level.

To configure the minimum requirements for SNMP, include the following statements at the **[edit]** hierarchy level of the configuration:

```
[edit]
snmp {
  community public;
}
```

To configure complete SNMP features, include the following statements at the **[edit]** hierarchy level of the configuration:

```
snmp {
  client-list client-list-name {
    ip-addresses;
  }
  community community-name {
    authorization authorization;
    client-list-name client-list-name;
    clients {
      address restrict;
    }
    view view-name;
  }
  contact contact;
  description description;
  filter-duplicates;
  filter-interfaces;
  health-monitor {
    falling-threshold integer;
    interval seconds;
    rising-threshold integer;
  }
  interface [ interface-names ];
  location location;
  name name;
  nonvolatile {
    commit-delay seconds;
  }
  rmon {
    alarm index {
      description description;
      falling-event-index index;
      falling-threshold integer;
      falling-threshold-interval seconds;
      interval seconds;
      request-type;
      rising-event-index index;
      rising-threshold integer;
      sample-type (absolute-value | delta-value);
    }
  }
}
```



```

    startup-alarm (falling-alarm | rising-alarm | rising-or-falling alarm);
    syslog-subtag syslog-subtag;
    variable oid-variable;
}
event index {
    community community-name;
    description description;
    type type;
}
history history-index {
    bucket-size number;
    interface interface-name;
    interval seconds;
    owner owner-name;
}
}
}
traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable> <match
        regular-expression>;
    flag flag;
}
}
trap-group group-name {
    categories {
        category;
    }
    destination-port port-number;
    targets {
        address;
    }
    version (all | v1 | v2);
}
}
trap-options {
    agent-address outgoing-interface;
    source-address address;
}
}
v3 {
    notify name {
        tag tag-name;
        type trap;
    }
    notify-filter profile-name {
        oid object-identifier (include | exclude);
    }
    snmp-community community-index {
        community-name community-name;
        security-name security-name;
        tag tag-name;
    }
    }
    target-address target-address-name {
        address address;
        address-mask address-mask;
        port port-number;
        retry-count number;
        tag-list tag-list;
        target-parameters target-parameters-name;
        timeout seconds;
    }
}

```



```
}
target-parameters target-parameters-name {
  notify-filter profile-name;
  parameters {
    message-processing-model (v1 | v2c | V3);
    security-level (authentication | none | privacy);
    security-model (usm | v1 | v2c);
    security-name security-name;
  }
}
usm {
  local-engine {
    user username {
      authentication-sha {
        authentication-password authentication-password;
      }
      authentication-md5 {
        authentication-password authentication-password;
      }
      authentication-none;
      privacy-aes128 {
        privacy-password privacy-password;
      }
      privacy-des {
        privacy-password privacy-password;
      }
      privacy-3des {
        privacy-password privacy-password;
      }
      privacy-none;
    }
  }
  remote-engine engine-id {
    user username {
      authentication-sha {
        authentication-password authentication-password;
      }
      authentication-md5 {
        authentication-password authentication-password;
      }
      authentication-none;
      privacy-aes128 {
        privacy-password privacy-password;
      }
      privacy-des {
        privacy-password privacy-password;
      }
      privacy-3des {
        privacy-password privacy-password;
      }
      privacy-none {
        privacy-password privacy-password;
      }
    }
  }
}
```



```

vacm {
  access {
    group group-name {
      (default-context-prefix | context-prefix context-prefix) {
        security-model (any | usm | v1 | v2c) {
          security-level (authentication | none | privacy) {
            notify-view view-name;
            read-view view-name;
            write-view view-name;
          }
        }
      }
    }
  }
  security-to-group {
    security-model (usm | v1 | v2c) {
      security-name security-name {
        group group-name;
      }
    }
  }
  view view-name {
    oid object-identifier (include | exclude);
  }
}

```

**Related  
Documentation**

- [Understanding the Implementation of SNMP on page 5459](#)
- [snmp on page 1325](#)

## Configuring the SNMP Community String

The SNMP community string defines the relationship between an SNMP server system and the client systems. This string acts like a password to control the clients' access to the server. To configure a community string in a Junos OS configuration, include the **community** statement at the **[edit snmp]** hierarchy level:

```

[edit snmp]
community name {
  authorization authorization;
  clients {
    default restrict;
    address restrict;
  }
  view view-name;
}

```

If the community name contains spaces, enclose it in quotation marks (" ").

The default authorization level for a community is **read-only**. To allow **Set** requests within a community, you need to define that community as **authorization read-write**. For **Set** requests, you also need to include the specific MIB objects that are accessible with read-write privileges using the **view** statement. The default view includes all supported



MIB objects that are accessible with read-only privileges; no MIB objects are accessible with read-write privileges. For more information about the **view** statement, see [“Configuring MIB Views” on page 5541](#).

The **clients** statement lists the IP addresses of the clients (community members) that are allowed to use this community. If no **clients** statement is present, all clients are allowed. For **address**, you must specify an IPv4 address, not a hostname. Include the **default restrict** option to deny access to all SNMP clients for which access is not explicitly granted. We recommend that you always include the **default restrict** option to limit SNMP client access to the local switch.



**NOTE:** Community names must be unique within each SNMP system.

**Related Documentation**

- [Configuring SNMP on page 1223](#)

## Configuring SNMP Trap Groups

Before any SNMP traps can be sent, you must configure a trap group, the categories of traps the group can receive, and the targets (systems) that will receive the traps. To create and name an SNMP trap group, include the **trap-group** statement at the **[edit snmp]** hierarchy level:

```
[edit snmp]
trap-group group-name {
  categories {
    category;
  }
  destination-port port-number;
  targets {
    address;
  }
  version (all | v1 | v2);
}
```

The trap group name can be any string and is embedded in the community name field of the trap. To configure your own trap group port, include the **destination-port** statement. The default destination port is port 162.

For each trap group that you define, you must include the **target** statement to define at least one system as the recipient of the SNMP traps in the trap group. Specify the IPv4 address of each recipient and not its hostname.

Specify the types of traps the trap group can receive in the **categories** statement.

A trap group can receive the following categories of traps:

- **authentication**—Authentication failures
- **chassis**—Chassis or environment notifications
- **configuration**—Configuration notifications



- **link**—Link-related notifications such as up-down transitions
- **remote-operations**—Remote operation notifications
- **startup**—System warm and cold starts

The **version** statement allows you to specify the SNMP version of the traps sent to targets of the trap group. If you specify **v1** only, SNMPv1 traps are sent. If you specify **v2** only, SNMPv2 traps are sent. If you specify **all**, both an SNMPv1 and an SNMPv2 trap are sent for every trap condition. For more information about the **version** statement, see [version](#).

#### Related Documentation

- [Standard SNMP Version 1 Traps on page 5492](#)
- [Standard SNMP Version 2 Traps on page 5495](#)
- [Juniper Networks Enterprise-Specific SNMP Version 1 Traps on page 5498](#)
- [Juniper Networks Enterprise-Specific SNMP Version 2 Traps on page 5500](#)

## Adding a Group of Clients to an SNMP Community

Junos OS enables you to add one or more groups of clients to an SNMP community. You can include the **client-list-name** *name* statement at the **[edit snmp community community-name]** hierarchy level to add all the members of the client list or prefix list to an SNMP community.

To define a list of clients, include the **client-list** statement followed by the IP addresses of the clients at the **[edit snmp]** hierarchy level:

```
[edit snmp]
  client-list client-list-name {
    ip-addresses;
  }
```

You can configure a prefix list at the **[edit policy options]** hierarchy level. Support for prefix lists in the SNMP community configuration enables you to use a single list to configure the SNMP and routing policies. For more information about the **prefix-list** statement, see the Routing Policy Configuration Guide.

To add a client list or prefix list to an SNMP community, include the **client-list-name** statement at the **[edit snmp community community-name]** hierarchy level:

```
[edit snmp community community-name]
  client-list-name client-list-name;
```



**NOTE:** The client list and prefix list must not have the same name.

The following example shows how to define a client list:

```
[edit]
snmp {
  client-list clentlist1 {
    10.1.1.1/32;
    10.2.2.2/32;
```



```
}  
}
```

The following example shows how to add a client list to an SNMP community:

```
[edit]  
snmp {  
  community community1 {  
    authorization read-only;  
    client-list-name clientlist1;  
  }  
}
```

The following example shows how to add a prefix list to an SNMP community:

```
[edit]  
policy-options {  
  prefix-list prefixlist {  
    10.3.3.3/32;  
    10.5.5.5/32;  
  }  
}  
snmp {  
  community community2 {  
    client-list-name prefixlist;  
  }  
}
```

- Related Documentation**
- [client-list on page 1278](#)
  - [client-list-name on page 1279](#)

## Configuring the Interfaces on Which SNMP Requests Can Be Accepted

By default, all router or switch interfaces have SNMP access privileges. To limit the access through certain interfaces only, include the **interface** statement at the **[edit snmp]** hierarchy level:

```
[edit snmp]  
interface [ interface-names ];
```

Specify the names of any logical or physical interfaces that should have SNMP access privileges. Any SNMP requests entering the router or switch from interfaces not listed are discarded.

- Related Documentation**
- [Configuring SNMP on a Device Running Junos OS](#)
  - [Configuration Statements at the \[edit snmp\] Hierarchy Level](#)
  - [Example: Configuring Secured Access List Checking](#)
  - [Configuring SNMP on page 1223](#)



## Configuring MIB Views

By default, an SNMP community grants read access and denies write access to all supported MIB objects (even communities configured as **authorization read-write**). To restrict or grant read or write access to a set of MIB objects, you must configure a MIB view and associate the view with a community.

To configure MIB views, include the **view** statement at the **[edit snmp]** hierarchy level:

```
[edit snmp]
view view-name {
  oid object-identifier (include | exclude);
}
```

The **view** statement defines a MIB view and identifies a group of MIB objects. Each MIB object of a view has a common object identifier (OID) prefix. Each object identifier represents a subtree of the MIB object hierarchy. The subtree can be represented either by a sequence of dotted integers (such as 1.3.6.1.2.1.2) or by its subtree name (such as **interfaces**). A configuration statement uses a view to specify a group of MIB objects on which to define access. You can also use a wildcard character asterisk (\*) to include OIDs that match a particular pattern in the SNMP view. To enable a view, you must associate the view with a community.



**NOTE:** To remove an OID completely, use the **delete view all oid oid-number** command but omit the include parameter.

To associate MIB views with a community, include the **view** statement at the **[edit snmp community community-name]** hierarchy level:

```
[edit snmp community community-name]
view view-name;
```

For more information about the Ping MIB, see RFC 2925 and the PING MIB topic in the SNMP MIBs and Traps Reference.

### Related Documentation

- [Configuring SNMP on a Device Running Junos OS](#)
- [Configuration Statements at the \[edit snmp\] Hierarchy Level](#)
- [Example: Ping Proxy MIB](#)
- [view \(Configuring a MIB View\)](#)
- [view \(Associating MIB View with a Community\) on page 5702](#)
- [oid](#)

## Configuring RMON Alarms and Events

The Junos OS supports the *Remote Network Monitoring* (RMON) MIB (RFC 2819), which allows a management device to monitor the values of MIB objects, or variables, against configured thresholds. When the value of a variable crosses a threshold, an alarm and



its corresponding event are generated. The event can be logged and can generate an SNMP trap.

To configure RMON alarms and events using the CLI, perform these tasks:

1. [Configuring SNMP on page 5542](#)
2. [Configuring an Event on page 5542](#)
3. [Configuring an Alarm on page 5543](#)

---

## Configuring SNMP

To configure SNMP:

1. Grant read-only access to all SNMP clients:

```
[edit snmp]
user@switch# set community community-name authorization authorization
For example:
```

```
[edit snmp]
user@switch# set community public authorization read-only
```

2. Grant read-write access to the RMON and jnx-rmon MIBs:

```
[edit snmp]
user@switch# set view view-name oid object-identifier include
user@switch# set view view-name oid object-identifier include
user@switch# set community community-name authorization authorization view view-name
For example:
```

```
[edit snmp]
user@switch# set view rmon-mib-view oid .1.3.6.1.2.1.16 include
user@switch# set view rmon-mib-view oid .1.3.6.1.4.1.2636.13 include
user@switch# set community private authorization read-write view rmon-mib-view
```

OIDs 1.3.6.1.2.1.16 and 1.3.6.1.4.1.2636.13 correspond to the RMON and jnxRmon MIBs.

3. Configure an SNMP trap group:

```
[edit snmp]
user@switch# set trap-group group-name categories category
user@switch# set trap-group group-name targets address
For example:
```

```
[edit snmp]
user@switch# set trap-group rmon-trap-group categories rmon-alarm
user@switch# set trap-group rmon-trap-group targets 192.168.5.5
```

The trap group **rmon-trap-group** is configured to send RMON traps to 192.168.5.5.

---

## Configuring an Event

To configure an event:

1. Configure an event index, community name, and type:

```
[edit snmp rmon]
user@switch# set event index community community-name type type
For example:
```

```
[edit snmp rmon]
```



```
user@switch# set event 1 community rmon-trap-group type log-and-trap
```

The event community corresponds to the SNMP trap group and is not the same as an SNMP community. This event generates an SNMP trap and adds an entry to the **logTable** in the RMON MIB.

2. Configure a description for the event:

```
[edit snmp rmon]
user@switch# set event index description description
```

For example:

```
[edit snmp rmon]
user@switch# set event 1 description "rmon event"
```

## Configuring an Alarm

To configure an alarm:

1. Configure an alarm index, the variable to monitor, the rising and falling thresholds, and the corresponding rising and falling events:

```
[edit snmp rmon]
user@switch# set alarm index variable oid-variable falling-threshold integer rising-threshold
integer rising-event-index index falling-event-index index
```

For example:

```
[edit snmp rmon]
user@switch# set alarm 5 variable .1.3.6.1.4.1.2636.3.1.13.1.8.9.1.0.0 falling-threshold 75
rising-threshold 90 rising-event-index 1 falling-event-index 1
```

The variable `.1.3.6.1.4.1.2636.3.1.13.1.8.9.1.0.0` corresponds to the **jnxRmon** MIB object **jnxOperatingCPU**, which represents the CPU utilization of the Routing Engine. The falling and rising threshold integers are 75 and 90. The rising and falling events both generate the same event (event index 1).

2. Configure the sample interval and type and the alarm type:

```
[edit snmp rmon]
user@switch# set alarm index interval seconds sample-type (absolute-value | delta-value)
startup-alarm (falling-alarm | rising-alarm | rising-or-falling-alarm)
```

For example:

```
[edit snmp rmon]
user@switch# set alarm 5 interval 30 sample-type absolute-value
startup-alarm rising-or-falling-alarm
```

The absolute value of the monitored variable is sampled every 30 seconds. The initial alarm can occur because of rising above the rising threshold or falling below the falling threshold.

### Related Documentation

- [Configuring SNMP on page 1223](#)
- [Juniper Networks Enterprise-Specific MIBs on page 5484](#)
- [Monitoring RMON MIB Tables on page 5727](#)
- [RMON MIB Event, Alarm, Log, and History Control Tables on page 5472](#)
- [Understanding RMON on page 5470](#)



## Configuring Health Monitoring

This topic describes how to configure the health monitor feature for QFX Series devices.

The health monitor feature extends the SNMP RMON alarm infrastructure to provide predefined monitoring for a selected set of object instances (such as file system usage, CPU usage, and memory usage) and dynamic object instances (such as Junos OS processes).

To configure health monitoring:

1. Configure the health monitor:

```
[edit snmp]
user@switch# set health-monitor
```

2. Configure the falling threshold:

```
[edit snmp]
user@switch# set health-monitor falling-threshold percentage
```

For example:

```
user@switch# set health-monitor falling-threshold 85
```

3. Configure the rising threshold:

```
[edit snmp]
user@switch# set health-monitor rising-threshold percentage
```

For example:

```
user@switch# set health-monitor rising-threshold 75
```

4. Configure the interval:

```
[edit snmp]
user@switch# set health-monitor interval seconds
```

For example:

```
user@switch# set health-monitor interval 600
```

### Related Documentation

- [Understanding Health Monitoring on page 5474](#)
- [falling-threshold on page 1287](#)
- [interval \(Health Monitor\) on page 1292](#)
- [rising-threshold \(Health Monitor\) on page 1322](#)

## Creating SNMPv3 Users

For each SNMPv3 user, you can specify the username, authentication type, authentication password, privacy type, and privacy password. After a user enters a password, a key based on the engine ID and password is generated and is written to the configuration file. After the generation of the key, the password is deleted from this configuration file.





**NOTE:** You can configure only one encryption type for each SNMPv3 user.

To create users, include the **user** statement at the **[edit snmp v3 usm local-engine]** hierarchy level:

```
[edit snmp v3 usm local-engine]
user username;
```

**username** is the name that identifies the SNMPv3 user.

To configure user authentication and encryption, include the following statements at the **[edit snmp v3 usm local-engine user username]** hierarchy level:

```
[edit snmp v3 usm local-engine user username]
authentication-md5 {
  authentication-password authentication-password;
}
authentication-sha {
  authentication-password authentication-password;
}
authentication-none;
privacy-aes128 {
  privacy-password privacy-password;
}
privacy-des {
  privacy-password privacy-password;
}
privacy-3des {
  privacy-password privacy-password;
}
privacy-none;
```

#### Related Documentation

- Complete SNMPv3 Configuration Statements
- [Minimum SNMPv3 Configuration on a Device Running Junos OS on page 5469](#)
- Example: Creating SNMPv3 Users Configuration
- Example: SNMPv3 Configuration



## Configuring Access Privileges for a Group

In SNMPv3, you can configure a group that sets the same access privileges for one or more users. Configuring a group includes defining the security model and security level, and associating one or more MIB view permissions for the group.



**NOTE:** You must associate at least one MIB view with the group. You can associate multiple MIB views (read, notify, write) to authorize different permissions based on the view. The view name cannot exceed 32 characters.

To configure access privileges for a group:

1. To configure the group:

```
[edit snmp v3 vacm access]
user@switch# edit group group-name
```

2. To configure the context prefix of the SNMP instance for the group:

```
[edit snmp v3 vacm access group group-name]
user@switch# edit (default-context-prefix | context-prefix context-prefix)
```

For example, to configure the default context prefix:

```
[edit snmp v3 vacm access group group-name]
user@switch# edit default-context-prefix
```

3. To configure the security model:

```
[edit snmp v3 vacm access group group-name (default-context-prefix | context-prefix
context-prefix)]
user@switch# edit security-model (any | usm | v1 | v2c)
```

For example, to configure the SNMPv3 user-based security model (USM):

```
[edit snmp v3 vacm access group group-name (default-context-prefix | context-prefix
context-prefix)]
user@switch# edit security-model usm
```

4. To configure the security level:

```
[edit snmp v3 vacm access group group-name (default-context-prefix | context-prefix
context-prefix) security-model (any | usm | v1 | v2c)]
user@switch# edit security-level (authentication | none | privacy)
```

For example, to configure a security level requiring user authentication and encryption:

```
[edit snmp v3 vacm access group group-name (default-context-prefix | context-prefix
context-prefix) security-model (any | usm | v1 | v2c)]
user@switch# edit security-level privacy
```





**NOTE:** Access privileges are granted to all packets with a security level equal to or greater than that configured. If you are configuring the SNMPv1 or v2c security model, use *none* as your security level. If you are configuring the SNMPv3 security model (USM), use the *authentication*, *none*, or *privacy* security level.

5. (Optional) To associate a read-only MIB view with an SNMP group:

```
[edit snmp v3 vacm access group group-name (default-context-prefix | context-prefix
context-prefix) security-model (any | usm | v1 | v2c) security-level (authentication |
none | privacy)]
user@switch# edit read-view view-name
```

6. (Optional) To associate a MIB view with an SNMP notification permission for an SNMP group:

```
[edit snmp v3 vacm access group group-name (default-context-prefix | context-prefix
context-prefix) security-model (any | usm | v1 | v2c) security-level (authentication |
none | privacy)]
user@switch# edit notify-view view-name
```

7. (Optional) To associate a MIB view with write permission for an SNMP group:

```
[edit snmp v3 vacm access group group-name (default-context-prefix | context-prefix
context-prefix) security-model (any | usm | v1 | v2c) security-level (authentication |
none | privacy)]
user@switch# edit write-view view-name
```

## Assigning a Security Name to a Group

In SNMPv3, each username is associated with a security name. The security name, together with the SNMP engine ID, is included in SNMP messages to ensure messaging security.

Before you assign a security name to a group, first create the security name. For an SNMPv3 client, the security name is the username configured at the **[edit snmp v3 usm local-engine user *username*]** hierarchy level. For SNMPv1 or v2c clients, the security name is the community string configured at the **[edit snmp v3 snmp-community *community-index*]** hierarchy level.

Assigning a security name to a group includes configuring a security model for the group, assigning the security name to the group, and configuring the group.

To assign an SNMP security name to a group:

1. To configure a security model for the group:

```
[edit snmp v3 vacm security-to-group]
user@switch# edit security-model (usm | v1 | v2c)
```

For example, to configure the SNMPv3 user-based security model (USM):

```
[edit snmp v3 vacm security-to-group]
user@switch# edit security-model usm
```



2. To associate the security name with a group:

```
[edit snmp v3 vacm security-to-group security-model (usm | v1 | v2c)]
user@switch# edit security-name security-name
```

3. To configure a group of SNMPv3 security names with the same security policy:

```
[edit snmp v3 vacm security-to-group security-model (usm | v1 | v2c) security-name
security-name]
user@switch# edit group group-name
```

**Related  
Documentation**

- [Creating SNMPv3 Users on page 5544](#)
- [group \(Associating a Security Name\) on page 5640](#)
- [security-model \(Group\) on page 5671](#)
- [security-name \(Community String\) on page 5673](#)
- [security-name \(Security Group\) on page 5674](#)

## Configuring SNMPv3 Traps on a Device Running Junos OS

In SNMPv3, you create traps and informs by configuring the **notify**, **target-address**, and **target-parameters** parameters. Traps are unconfirmed notifications, whereas informs are confirmed notifications. This section describes how to configure SNMP traps. For information about configuring SNMP informs, see [“Configuring SNMP Informs” on page 5549](#).

The target address defines a management application’s address and parameters to be used in sending notifications. Target parameters define the message processing and security parameters that are used in sending notifications to a particular management target. SNMPv3 also lets you define SNMPv1 and SNMPv2c traps.



**NOTE:** When you configure SNMP traps, make sure your configured access privileges allow the traps to be sent. Access privileges are configured at the `[edit snmp v3 vacm access]` and `[edit snmp v3 vacm security-to-group]` hierarchy levels.

To configure SNMP traps, include the following statements at the `[edit snmp v3]` hierarchy level:

```
[edit snmp v3]
notify name {
  tag tag-name;
  type trap;
}
notify-filter name {
  oid object-identifier (include | exclude);
}
target-address target-address-name {
  address address;
  address-mask address-mask;
  logical-system (SNMP logical-system);
  port port-number;
```



```

routing-instance instance;
tag-list tag-list;
target-parameters target-parameters-name;
}
target-parameters target-parameters-name {
  notify-filter profile-name;
  parameters {
    message-processing-model (v1 | v2c | v3);
    security-level (authentication | none | privacy);
    security-model (usm | v1 | v2c);
    security-name security-name;
  }
}

```

#### Related Documentation

- Configuring the SNMPv3 Trap Notification
- Configuring the Trap Notification Filter
- Configuring the Trap Target Address
- Defining and Configuring the Trap Target Parameters
- [Configuring SNMP Informs on page 5549](#)
- Configuring the Remote Engine and Remote User
- Configuring the Inform Notification Type and Target Address
- Complete SNMPv3 Configuration Statements
- [Minimum SNMPv3 Configuration on a Device Running Junos OS on page 5469](#)

## Configuring SNMP Informs


Junos OS supports two types of notifications: traps and informs. With traps, the receiver does not send any acknowledgment when it receives a trap. Therefore, the sender cannot determine if the trap was received. A trap may be lost because a problem occurred during transmission. To increase reliability, an inform is similar to a trap except that the inform is stored and retransmitted at regular intervals until one of these conditions occurs:

- The receiver (target) of the inform returns an acknowledgment to the SNMP agent.
- A specified number of unsuccessful retransmissions have been attempted and the agent discards the inform message.

If the sender never receives a response, the inform can be sent again. Thus, informs are more likely to reach their intended destination than traps are. Informs use the same communications channel as traps (same socket and port) but have different protocol data unit (PDU) types.

Informs are more reliable than traps, but they consume more network, router, and switch resources (see [Figure 201 on page 5550](#)). Unlike a trap, an inform is held in memory until a response is received or the timeout is reached. Also, traps are sent only once, whereas an inform may be retried several times. Use informs when it is important that the SNMP manager receive all notifications. However, if you are more concerned about network traffic, or router and switch memory, use traps.

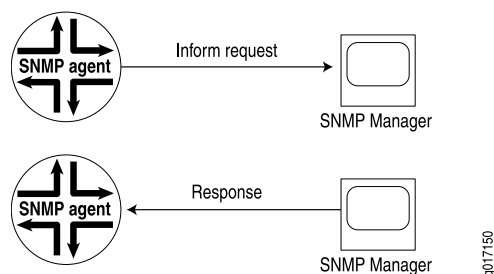

**Figure 201: Inform Request and Response**

For information about configuring SNMP traps, see [“Configuring SNMPv3 Traps on a Device Running Junos OS” on page 5548](#).

**Related Documentation**

- [Configuring SNMPv3 Traps on a Device Running Junos OS on page 5548](#)
- [Configuring the Remote Engine and Remote User](#)
- [Configuring the Inform Notification Type and Target Address](#)
- [Complete SNMPv3 Configuration Statements](#)
- [Minimum SNMPv3 Configuration on a Device Running Junos OS on page 5469](#)

## Configuration Tasks for System Log Messages

- [Junos OS Minimum System Logging Configuration on page 5551](#)
- [Junos OS System Log Configuration Statements on page 5551](#)
- [Adding a Text String to System Log Messages on page 5552](#)
- [Directing System Log Messages to a Log File on page 5553](#)
- [Directing System Log Messages to a Remote Machine on page 5554](#)
- [Directing System Log Messages to a User Terminal on page 5554](#)
- [Directing System Log Messages to the Console on page 5555](#)
- [Disabling the System Logging of a Facility on page 5555](#)
- [Displaying a Log File from a Single-Chassis System on page 5556](#)
- [Including Priority Information in System Log Messages on page 5557](#)
- [Including the Year or Millisecond in Timestamps on page 5558](#)
- [Logging Messages in Structured-Data Format on page 5559](#)
- [Interpreting Messages Generated in Structured-Data Format on page 5560](#)
- [Interpreting Messages Generated in Standard Format on page 5563](#)
- [Specifying Log File Size, Number, and Archiving Properties on page 5563](#)
- [Specifying the Facility and Severity of Messages to Include in the Log on page 5565](#)
- [Junos OS System Logging Facilities and Message Severity Levels on page 5566](#)
- [System Log Default Facilities for Messages Directed to a Remote Destination on page 5567](#)
- [Junos OS System Log Alternate Facilities for Remote Logging on page 5568](#)



- [Changing the Alternative Facility Name for Remote System Log Messages on page 5569](#)
- [Using Regular Expressions to Refine the Set of Logged Messages on page 5570](#)

## Junos OS Minimum System Logging Configuration

To record or view system log messages, you must include the **syslog** statement at the **[edit system]** hierarchy level. Specify at least one destination for the messages, as described in [Table 490 on page 5551](#). For more information about the configuration statements, see [Single-Chassis System Logging Configuration Overview](#).

**Table 490: Minimum Configuration Statements for System Logging**

| Destination                                                        | Minimum Configuration Statements                                                                              |
|--------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| File                                                               | <pre>[edit system syslog] file <i>filename</i> {   <i>facility severity</i>; }</pre>                          |
| Terminal session of one, several, or all users                     | <pre>[edit system syslog] user (<i>username</i>   *) {   <i>facility severity</i>; }</pre>                    |
| Router or switch console                                           | <pre>[edit system syslog] console {   <i>facility severity</i>; }</pre>                                       |
| Remote machine or the other Routing Engine on the router or switch | <pre>[edit system syslog] host (<i>hostname</i>   other-routing-engine) {   <i>facility severity</i>; }</pre> |

### Related Documentation

- [Junos OS System Log Configuration Overview](#)
- [Overview of Junos OS System Log Messages on page 5505](#)
- [Overview of Single-Chassis System Logging Configuration on page 5505](#)

## Junos OS System Log Configuration Statements

To configure the switch to log system messages, include the **syslog** statement at the **[edit system]** hierarchy level:

```
[edit system]
syslog {
  archive <files number> <size size> <world-readable | no-world-readable>;
  console {
    facility severity;
  }
  file filename {
    facility severity;
  }
}
```



```
archive <archive-sites (ftp-url <password password>) > <files number> <size size>
    <start-time "YYYY-MM-DD.hh:mm"> <transfer-interval minutes> <world-readable |
    no-world-readable>;
explicit-priority;
match "regular-expression";
structured-data {
    brief;
}
}
host hostname {
    facility severity;
    explicit-priority;
    facility-override facility;
    log-prefix string
    match "regular-expression";
}
source-address source-address;
time-format (year | millisecond | year millisecond);
user (username | *) {
    facility severity;
    match "regular-expression";
}
}
```

**Related Documentation**

- [Overview of Junos OS System Log Messages on page 5505](#)

## Adding a Text String to System Log Messages

To add a text string to every system log message directed to a remote machine or to the other Routing Engine, include the **log-prefix** statement at the **[edit system syslog host]** hierarchy level:

```
[edit system syslog host (hostname | other-routing-engine)]
facility severity;
log-prefix string;
```

The string can contain any alphanumeric or special character except the equal sign ( = ) and the colon ( : ). It also cannot include the space character; do not enclose the string in quotation marks ( " ") in an attempt to include spaces in it.

The Junos OS system logging utility automatically appends a colon and a space to the specified string when the system log messages are written to the log. The string is inserted after the identifier for the Routing Engine that generated the message.

The following example shows how to add the string **M120** to all messages to indicate that the router is an M120 router, and direct the messages to the remote machine **hardware-logger.mycompany.com**:

```
[edit system syslog]
host hardware-logger.mycompany.com {
    any info;
    log-prefix M120;
}
```



When these configuration statements are included on an M120 router called **origin1**, a message in the system log on **hardware-logger.mycompany.com** looks like the following:

```
Mar 9 17:33:23 origin1 M120: mgd[477]: UI_CMDLINE_READ_LINE: user 'root', command 'run show version'
```

**Related Documentation**

- [Single-Chassis System Logging Configuration Overview](#)
- [Specifying Log File Size, Number, and Archiving Properties on page 5563](#)
- [Overview of Single-Chassis System Logging Configuration on page 5505](#)

## Directing System Log Messages to a Log File

To direct system log messages to a file in the **/var/log** directory of the local Routing Engine, include the **file** statement at the **[edit system syslog]** hierarchy level:

```
[edit system syslog]
file filename {
    facility severity;
    archive <archive-sites (ftp-url <password password>) > <files number> <size size>
        <start-time "YYYY-MM-DD.hh:mm"> <transfer-interval minutes> <world-readable |
        no-world-readable>;
    explicit-priority;
    match "regular-expression";
    structured-data {
        brief;
    }
}
```

For the list of facilities and severity levels, see [Specifying the Facility and Severity of Messages to Include in the Log](#).

To prevent log files from growing too large, the Junos OS system logging utility by default writes messages to a sequence of files of a defined size. By including the **archive** statement, you can configure the number of files, their maximum size, and who can read them, either for all log files or for a certain log file. For more information, see [“Specifying Log File Size, Number, and Archiving Properties” on page 5563](#).

For information about the following statements, see the indicated sections:

- **explicit-priority**—See [“Including Priority Information in System Log Messages” on page 5557](#)
- **match**—See [“Using Regular Expressions to Refine the Set of Logged Messages” on page 5570](#)
- **structured-data**—See [Logging Messages in Structured-Data Format](#)

**Related Documentation**

- [Single-Chassis System Logging Configuration Overview](#)
- [Overview of Junos OS System Log Messages on page 5505](#)
- [Logging Messages in Structured-Data Format on page 5559](#)
- [Examples: Configuring System Logging](#)



- [Examples: Configuring System Logging on page 5509](#)

## Directing System Log Messages to a Remote Machine

To direct system log messages to a remote machine, include the **host** statement at the **[edit system syslog]** hierarchy level:

```
[edit system syslog]
host (hostname | other-routing-engine) {
    facility severity;
    explicit-priority;
    facility-override facility;
    log-prefix string;
    match "regular-expression";
}
source-address source-address;
```

To direct system log messages to a remote machine, include the **host hostname** statement to specify the remote machine's IP version 4 (IPv4) address or fully qualified hostname. The remote machine must be running the standard **syslogd** utility. We do not recommend directing messages to another Juniper Networks switch. In each system log message directed to the remote machine, the hostname of the local Routing Engine appears after the timestamp to indicate that it is the source for the message.

For the list of logging facilities and severity levels to configure under the **host** statement, see [“Specifying the Facility and Severity of Messages to Include in the Log” on page 5565](#).

To record facility and severity level information in each message, include the **explicit-priority** statement. For more information, see [“Including Priority Information in System Log Messages” on page 5557](#).

For information about the **match** statement, see [“Using Regular Expressions to Refine the Set of Logged Messages” on page 5570](#).

When directing messages to remote machines, you can include the **source-address** statement to specify the IP address of the switch that is reported in the messages as their source. In each **host** statement, you can also include the **facility-override** statement to assign an alternative facility and the **log-prefix** statement to add a string to each message.

### Related Documentation

- [Overview of Single-Chassis System Logging Configuration on page 5505](#)

## Directing System Log Messages to a User Terminal

To direct system log messages to the terminal session of one or more specific users (or all users) when they are logged in to the local Routing Engine, include the **user** statement at the **[edit system syslog]** hierarchy level:

```
[edit system syslog]
user (username | *) {
    facility severity;
    match "regular-expression";
}
```



```
}
```

Specify one or more Junos OS usernames, separating multiple values with spaces, or use the asterisk (\*) to indicate all users who are logged in to the local Routing Engine.

For the list of logging facilities and severity levels, see [Specifying the Facility and Severity of Messages to Include in the Log](#). For information about the **match** statement, see [“Using Regular Expressions to Refine the Set of Logged Messages”](#) on page 5570.

#### Related Documentation

- [Single-Chassis System Logging Configuration Overview](#)
- [Overview of Single-Chassis System Logging Configuration](#) on page 5505
- [Examples: Configuring System Logging](#)
- [Examples: Configuring System Logging](#) on page 5509

## Directing System Log Messages to the Console

To direct system log messages to the console of the local Routing Engine, include the **console** statement at the **[edit system syslog]** hierarchy level:

```
[edit system syslog]
console {
    facility severity;
}
```

For the list of logging facilities and severity levels, see [Specifying the Facility and Severity of Messages to Include in the Log](#).

#### Related Documentation

- [Single-Chassis System Logging Configuration Overview](#)
- [Overview of Single-Chassis System Logging Configuration](#) on page 5505
- [Examples: Configuring System Logging](#)
- [Examples: Configuring System Logging](#) on page 5509

## Disabling the System Logging of a Facility

To disable the logging of messages that belong to a particular facility, include the **facility none** statement in the configuration. This statement is useful when, for example, you want to log messages that have the same severity level and belong to all but a few facilities. Instead of including a statement for each facility you want to log, you can include the **any severity** statement and then a **facility none** statement for each facility that you do not want to log. For example, the following logs all messages at the **error** level or higher to the console, except for messages from the **daemon** and **kernel** facilities. Messages from those facilities are logged to the file **>/var/log/internals** instead:

```
[edit system syslog]
console {
    any error;
    daemon none;
    kernel none;
}
```



```
file internals {
  daemon info;
  kernel info;
}
```

- Related Documentation**
- [Single-Chassis System Logging Configuration Overview](#)
  - [Overview of Single-Chassis System Logging Configuration on page 5505](#)

## Displaying a Log File from a Single-Chassis System

To display a log file stored on a single-chassis system such as the QFX3500 switch, enter Junos OS CLI operational mode and issue the following commands:

```
user@switch> show log log-filename
user@switch> file show log-file-pathname
```

By default, the commands display the file stored on the local Routing Engine.

The following example shows the output from the **show log messages** command:

```
user@switch1> show log messages
Nov  4 11:30:01 switch1 newsyslog[2283]: logfile turned over due to size>128K
Nov  4 11:30:01 switch1 newsyslog[2283]: logfile turned over due to size>128K
Nov  4 11:30:06 switch1 chassism[952]: CM ENV Monitor: set fan speed is 65 percent
for Fan 1
Nov  4 11:30:06 switch1 chassism[952]: CM ENV Monitor: set fan speed is 65 percent
for Fan 2
Nov  4 11:30:06 switch1 chassism[952]: CM ENV Monitor: set fan speed is 65 percent
for Fan 3
...
Nov  4 11:52:53 switch1 snmpd[944]: SNMPD_HEALTH_MON_INSTANCE: Health Monitor:
jroute daemon memory usage (Management
process): new instance detected (variable: sysAppElemRunMemory.5.6.2293)
Nov  4 11:52:53 switch1 snmpd[944]: SNMPD_HEALTH_MON_INSTANCE: Health Monitor:
jroute daemon memory usage (Command-line
interface): new instance detected (variable: sysAppElemRunMemory.5.8.2292)
...
Nov  4 12:08:30 switch1 rpdf[957]: task_connect: task BGP_100.10.10.1.6+179 addr
10.10.1.6+179: Can't assign requested
address
Nov  4 12:08:30 switch1 rpdf[957]: bgp_connect_start: connect 10.10.1.6 (Internal
AS 100): Can't assign requested address
Nov  4 12:10:24 switch1 mgd[2293]: UI_CMDLINE_READ_LINE: User 'jsmith', command
'exit '
Nov  4 12:10:27 switch1 mgd[2293]: UI_DBASE_LOGOUT_EVENT: User 'jsmith' exiting
configuration mode
Nov  4 12:10:31 switch1 mgd[2293]: UI_CMDLINE_READ_LINE: User 'jsmith', command
'show log messages'
```

The following example shows the output from the **file show** command. The file in the pathname **/var/log/processes** has been previously configured to include messages from the **daemon** facility.

```
user@switch1> file show /var/log/processes
Feb 22 08:58:24 switch1 snmpd[359]: SNMPD_TRAP_WARM_START: trap_generate_warm:
SNMP trap: warm start
Feb 22 20:35:07 switch1 snmpd[359]: SNMPD_THROTTLE_QUEUE_DRAINED:
trap_throttle_timer_handler: cleared all throttled traps
```



```
Feb 23 07:34:56 switch1 snmpd[359]: SNMPD_TRAP_WARM_START: trap_generate_warm:
SNMP trap: warm start
Feb 23 07:38:19 switch1 snmpd[359]: SNMPD_TRAP_COLD_START: trap_generate_cold:
SNMP trap: cold start
...
```

**Related  
Documentation**

- [Interpreting Messages Generated in Standard Format on page 5563](#)
- [Interpreting Messages Generated in Structured-Data Format on page 5560](#)

## Including Priority Information in System Log Messages

The facility and severity level of a message are together referred to as its *priority*. By default, messages logged in the standard Junos OS format do not include information about priority. To include priority information in standard-format messages directed to a file, include the **explicit-priority** statement at the **[edit system syslog file *filename*]** hierarchy level:

```
[edit system syslog file filename]
facility severity;
explicit-priority;
```



**NOTE:** Messages logged in structured-data format include priority information by default. If you include the **structured-data** statement at the **[edit system syslog file *filename*]** hierarchy level along with the **explicit-priority** statement, the **explicit-priority** statement is ignored and messages are logged in structured-data format.

For information about the **structured-data** statement, see *Logging Messages in Structured-Data Format*. For information about the contents of a structured-data message, see the *Junos OS System Log Messages Reference*.

To include priority information in messages directed to a remote machine or the other Routing Engine, include the **explicit-priority** statement at the **[edit system syslog host (*hostname* | other-routing-engine)]** hierarchy level:

```
[edit system syslog host (hostname | other-routing-engine)]
facility severity;
explicit-priority;
```



**NOTE:** The **other-routing-engine** option does not apply to the QFX Series.

The priority recorded in a message always indicates the original, local facility name. If the **facility-override** statement is included for messages directed to a remote destination, the Junos OS system logging utility still uses the alternative facility name for the messages themselves when directing them to the remote destination. For more information, see [“Changing the Alternative Facility Name for Remote System Log Messages” on page 5569](#).



When the **explicit-priority** statement is included, the Junos OS logging utility prepends codes for the facility name and severity level to the message tag name, if the message has one:

**FACILITY-severity[-TAG]**

(The tag is a unique identifier assigned to some Junos OS system log messages; for more information, see the *Junos OS System Log Messages Reference*.)

In the following example, the **CHASSISD\_PARSE\_COMPLETE** message belongs to the **daemon** facility and is assigned severity **info (6)**:

```
Aug 21 12:36:30 router1 chassisd[522]: %DAEMON-6-CHASSISD_PARSE_COMPLETE:
Using new configuration
```

When the **explicit-priority** statement is not included, the priority does not appear in the message:

```
Aug 21 12:36:30 router1 chassisd[522]: CHASSISD_PARSE_COMPLETE: Using new
configuration
```

For more information about message formatting, see the *Junos OS System Log Messages Reference*.

#### Related Documentation

- Single-Chassis System Logging Configuration Overview
- [Overview of Single-Chassis System Logging Configuration on page 5505](#)
- Examples: Configuring System Logging

## Including the Year or Millisecond in Timestamps

By default, the timestamp recorded in a standard-format system log message specifies the month, date, hour, minute, and second when the message was logged, as in the following example:

```
Aug 21 15:36:30
```

To include the year, the millisecond, or both, in the timestamp, include the **time-format** statement at the **[edit system syslog]** hierarchy level:

```
[edit system syslog]
time-format (year | millisecond | year millisecond);
```

The modified timestamp is used in messages directed to each destination configured by a **file**, **console**, or **user** statement at the **[edit system syslog]** hierarchy level, but not to destinations configured by a **host** statement.

The following example illustrates the format for a timestamp that includes both the millisecond (401) and the year (2010):

```
Aug 21 15:36:30.401 2010
```





**NOTE:** By default, messages logged in structured-data format include the year and millisecond. If you include the `structured-data` statement at the `[edit system syslog file filename]` hierarchy level along with the `time-format` statement, the `time-format` statement is ignored and messages are logged in structured-data format.

For information about the `structured-data` statement, see [“Logging Messages in Structured-Data Format” on page 5559](#). For information about interpreting messages in a structured-data format, see [“Interpreting Messages Generated in Structured-Data Format” on page 5560](#).

## Logging Messages in Structured-Data Format

You can log messages to a file in structured-data format instead of the standard Junos OS format. The structured-data format provides more information without adding significant length, and makes it easier for automated applications to extract information from a message.

The structured-data format complies with Internet draft **draft-ietf-syslog-protocol-21.txt**. The draft establishes a standard message format regardless of the source or transport protocol for logged messages.

To output messages to a file in structured-data format, include the **structured-data** statement at the `[edit system syslog file filename]` hierarchy level:

```
[edit system syslog file filename]
  facility severity;
  structured-data {
    brief;
  }
```

The optional **brief** statement suppresses the English-language text that appears by default at the end of a message to describe the error or event. For information about the fields in a structured-data-format message, see [“Interpreting Messages Generated in Structured-Data Format” on page 5560](#).

The structured format is used for all messages logged to the file that are generated by a Junos OS process or software library.



**NOTE:** If you include either or both of the `explicit-priority` and `time-format` statements along with the `structured-data` statement, they are ignored. These statements apply to the standard Junos OS system log format, not to structured-data format.



## Interpreting Messages Generated in Structured-Data Format

By default, Junos OS processes and software libraries write messages to the system log file in structured-data format. For information about the **structured-data** statement, see [Logging Messages in Structured-Data Format](#).

Structured-format makes it easier for automated applications to extract information from the message. In particular, the standardized format for reporting the value of variables (elements in the English-language message that vary depending on the circumstances that triggered the message) makes it easy for an application to extract those values.

The structured-data format for a message includes the following fields (which appear here on two lines only for legibility):

```
<priority code>version timestamp hostname process processID TAG [junos@2636.platform
variable-value-pairs] message-text
```

[Table 491 on page 5560](#) describes the fields. If the system logging utility cannot determine the value in a particular field, a hyphen ( - ) appears instead.

**Table 491: Fields in Structured-Data Messages**

| Field                        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Examples                                                                                                                                                                     |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>&lt;priority code&gt;</i> | Number that indicates the facility and severity of a message. It is calculated by multiplying the facility number by 8 and then adding the numerical value of the severity. For a mapping of the numerical codes to facility and severity, see <a href="#">Specifying the Facility and Severity of Messages to Include in the Log</a> .                                                                                                                                                 | <165> for a message from the pfe facility (facility=20) with severity notice (severity=5).                                                                                   |
| <i>version</i>               | Version of the Internet Engineering Task Force (IETF) system logging protocol specification.                                                                                                                                                                                                                                                                                                                                                                                            | 1 for the initial version                                                                                                                                                    |
| <i>timestamp</i>             | Time when the message was generated, in one of two representations: <ul style="list-style-type: none"> <li>YYYY-MM-DDTHH:MM:SS.MSZ is the year, month, day, hour, minute, second and millisecond in Universal Coordinated Time (UTC)</li> <li>YYYY-MM-DDTHH:MM:SS.MS+/-HH:MM is the year, month, day, hour, minute, second and millisecond in local time; the hour and minute that follows the plus sign (+) or minus sign (-) is the offset of the local time zone from UTC</li> </ul> | 2007-02-15T09:17:15.719Z is 9:17 AM UTC on 15 February 2007.<br>2007-02-15T01:17:15.719-08:00 is the same timestamp expressed as Pacific Standard Time in the United States. |
| <i>hostname</i>              | Name of the host that originally generated the message.                                                                                                                                                                                                                                                                                                                                                                                                                                 | switch1                                                                                                                                                                      |



Table 491: Fields in Structured-Data Messages (*continued*)

| Field                       | Description                                                                                                                                                                                                                    | Examples                                  |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| <i>process</i>              | Name of the Junos OS process that generated the message.                                                                                                                                                                       | mgd                                       |
| <i>processID</i>            | UNIX process ID (PID) of the Junos process that generated the message.                                                                                                                                                         | 3046                                      |
| <i>TAG</i>                  | Junos OS system log message tag, which uniquely identifies the message.                                                                                                                                                        | UI_DBASE_LOGOUT_EVENT                     |
| <i>junos@2636.platform</i>  | An identifier for the type of hardware platform that generated the message. The junos@2636 prefix indicates that the platform runs the Junos OS. It is followed by a dot-separated numerical identifier for the platform type. | junos@2636.1.1.1.2.18                     |
| <i>variable-value-pairs</i> | A variable-value pair for each element in the <i>message-text</i> string that varies depending on the circumstances that triggered the message. Each pair appears in the format <i>variable</i> = " <i>value</i> ".            | username="regress"                        |
| <i>message-text</i>         | English-language description of the event or error (omitted if the brief statement is included at the [edit system syslog file <i>filename</i> structured-data] hierarchy level).                                              | User 'regress' exiting configuration mode |

By default, the structured-data version of a message includes English text at the end, as in the following example (which appears on multiple lines only for legibility):

```
<165>1 2007-02-15T09:17:15.719Z router1 mgd 3046 UI_DBASE_LOGOUT_EVENT
[junos@2636.1.1.1.2.18 username="regress"] User 'regress' exiting configuration mode
```

When the brief statement is included at the [edit system syslog file *filename* structured-data ] hierarchy level, the English text is omitted, as in this example:

```
<165>1 2007-02-15T09:17:15.719Z router1 mgd 3046 UI_DBASE_LOGOUT_EVENT
[junos@2636.1.1.1.2.18 username="regress"]
```

Table 492 on page 5562 maps the codes that appear in the *priority-code* field to facility and severity level.



**NOTE:** Not all of the facilities and severities listed in Table 492 on page 5562 can be included in statements at the [edit system syslog] hierarchy level (some are used by internal processes). For a list of the facilities and severity levels that can be included in the configuration, see “Specifying the Facility and Severity of Messages to Include in the Log” on page 5565.



Table 492: Facility and Severity Codes in the priority-code Field

| Facility (number)             | Severity<br>emergency | alert | critical | error | warning | notice | info | debug |
|-------------------------------|-----------------------|-------|----------|-------|---------|--------|------|-------|
| kernel (0)                    | 1                     | 1     | 2        | 3     | 4       | 5      | 6    | 7     |
| user (1)                      | 8                     | 9     | 10       | 11    | 12      | 13     | 14   | 15    |
| mail (2)                      | 16                    | 17    | 18       | 19    | 20      | 21     | 22   | 23    |
| daemon (3)                    | 24                    | 25    | 26       | 27    | 28      | 29     | 30   | 31    |
| authorization (4)             | 32                    | 33    | 34       | 35    | 36      | 37     | 38   | 39    |
| syslog (5)                    | 40                    | 41    | 42       | 43    | 44      | 45     | 46   | 47    |
| printer (6)                   | 48                    | 49    | 50       | 51    | 52      | 53     | 54   | 55    |
| news (7)                      | 56                    | 57    | 58       | 59    | 60      | 61     | 62   | 63    |
| uucp (8)                      | 64                    | 65    | 66       | 67    | 68      | 69     | 70   | 71    |
| clock (9)                     | 72                    | 73    | 74       | 75    | 76      | 77     | 78   | 79    |
| authorization-private<br>(10) | 80                    | 81    | 82       | 83    | 84      | 85     | 86   | 87    |
| ftp (11)                      | 88                    | 89    | 90       | 91    | 92      | 93     | 94   | 95    |
| ntp (12)                      | 96                    | 97    | 98       | 99    | 100     | 101    | 102  | 103   |
| security (13)                 | 104                   | 105   | 106      | 107   | 108     | 109    | 110  | 111   |
| console (14)                  | 112                   | 113   | 114      | 115   | 116     | 117    | 118  | 119   |
| local0 (16)                   | 128                   | 129   | 130      | 131   | 132     | 133    | 134  | 135   |
| dfc (17)                      | 136                   | 137   | 138      | 139   | 140     | 141    | 142  | 143   |
| local2 (18)                   | 144                   | 145   | 146      | 147   | 148     | 149    | 150  | 151   |
| firewall (19)                 | 152                   | 153   | 154      | 155   | 156     | 157    | 158  | 159   |
| pfe (20)                      | 160                   | 161   | 162      | 163   | 164     | 165    | 166  | 167   |
| conflict-log (21)             | 168                   | 169   | 170      | 171   | 172     | 173    | 174  | 175   |
| change-log (22)               | 176                   | 177   | 178      | 179   | 180     | 181    | 182  | 183   |
| interactive-commands<br>(23)  | 184                   | 185   | 186      | 187   | 188     | 189    | 190  | 191   |



## Interpreting Messages Generated in Standard Format

The syntax of a standard-format message generated by a Junos OS process or subroutine library depends on whether it includes priority information:

- When the **explicit-priority** statement is included at the **[edit system syslog file *filename*]** or **[edit system syslog host *hostname*]** hierarchy level, a system log message has the following syntax:

```
timestamp message-source: %facility-severity-TAG: message-text
```

- When directed to the console or to users, or when the **explicit-priority** statement is not included for files or remote hosts, a system log message has the following syntax:

```
timestamp message-source: TAG: message-text
```

Table 493 on page 5563 describes the message fields.

**Table 493: Fields in Standard-Format Messages**

| Field                 | Description                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>timestamp</i>      | Time at which the message was logged.                                                                                                                                                                                                                                                                                                                                                           |
| <i>message-source</i> | Identifier of the process or component that generated the message and the routing platform on which the message was logged. This field includes two or more subfields: hostname, process and process ID (PID). If the process does not report its PID, the PID is not displayed. The message source subfields are displayed in the following format:<br><br><i>hostname process[process-ID]</i> |
| <i>facility</i>       | Code that specifies the facility to which the system log message belongs. For a mapping of codes to facility names, see Table: <b>Facility Codes Reported in Priority Information</b> in “Including Priority Information in System Log Messages” on page 5557.                                                                                                                                  |
| <i>severity</i>       | Numerical code that represents the severity level assigned to the system log message. For a mapping of codes to severity names, see Table: <b>Numerical Codes for Severity Levels Reported in Priority Information</b> in “Including Priority Information in System Log Messages” on page 5557.                                                                                                 |
| <i>TAG</i>            | Text string that uniquely identifies the message, in all uppercase letters and using the underscore (_) to separate words. The tag name begins with a prefix that indicates the generating software process or library. The entries in this reference are ordered alphabetically by this prefix.<br><br>Not all processes on a routing platform use tags, so this field does not always appear. |
| <i>message-text</i>   | Text of the message.                                                                                                                                                                                                                                                                                                                                                                            |

## Specifying Log File Size, Number, and Archiving Properties

To prevent log files from growing too large, by default the Junos system logging utility writes messages to a sequence of files of a defined size. The files in the sequence are



referred to as *archive* files to distinguish them from the *active* file to which messages are currently being written. The default maximum size depends on the platform type:

- 128 kilobytes (KB) for EX Series switches and J Series routers
- 1 megabyte (MB) for M Series, MX Series, and T Series routers
- 10 MB for TX Matrix or TX Matrix Plus routers
- 1 MB for the QFX Series

When an active log file called **logfile** reaches the maximum size, the logging utility closes the file, compresses it, and names the compressed archive file **logfile.0.gz**. The logging utility then opens and writes to a new active file called **logfile**. This process is also known as file rotation. When the new **logfile** reaches the configured maximum size, **logfile.0.gz** is renamed **logfile.1.gz**, and the new **logfile** is closed, compressed, and renamed **logfile.0.gz**. By default, the logging utility creates up to 10 archive files in this manner. When the maximum number of archive files is reached and when the size of the active file reaches the configured maximum size, the contents of the last archived file are overwritten by the current active file. The logging utility by default also limits the users who can read log files to the **root** user and users who have the Junos OS **maintenance** permission.

Junos OS provides a configuration statement **log-rotate-frequency** that configures the system log file rotation frequency by configuring the time interval for checking the log file size. The frequency can be set to a value of 1 minute through 59 minutes. The default frequency is 15 minutes.

To configure the log rotation frequency, include the **log-rotate-frequency** statement at the **[edit system syslog]** hierarchy level.

You can include the **archive** statement to change the maximum size of each file, how many archive files are created, and who can read log files.

To configure values that apply to all log files, include the **archive** statement at the **[edit system syslog]** hierarchy level:

```
archive <files number> <size size> <world-readable | no-world-readable>;
```

To configure values that apply to a specific log file, include the **archive** statement at the **[edit system syslog file *filename*]** hierarchy level:

```
archive <archive-sites (ftp-url <password password>)> <files number> <size size>  
<start-time "YYYY-MM-DD.hh:mm"> <transfer-interval minutes> <world-readable |  
no-world-readable>;
```

**archive-sites *site-name*** specifies a list of archive sites that you want to use for storing files. The ***site-name*** value is any valid FTP URL to a destination. If more than one site name is configured, a list of archive sites for the system log files is created. When a file is archived, the router or switch attempts to transfer the file to the first URL in the list, moving to the next site only if the transfer does not succeed. The log file is stored at the archive site with the specified log filename. For information about how to specify valid FTP URLs, see [“Format for Specifying Filenames and URLs in Junos OS CLI Commands” on page 48](#).



**binary-data** Mark file as containing binary data. This allows proper archiving of binary files, such as WTMP files (login records for UNIX based systems). To restore the default setting, include the **no-binary-data** statement.

**files *number*** specifies the number of files to create before the oldest file is overwritten. The value can be from 1 through 1000.

**size *size*** specifies the maximum size of each file. The value can be from 64 KB (**64k**) through 1 gigabyte (**1g**); to represent megabytes, use the letter **m** after the integer. There is no space between the digits and the **k**, **m**, or **g** units letter.

**start-time "YYYY-MM-DD.hh:mm"** defines the date and time in the local time zone for a one-time transfer of the active log file to the first reachable site in the list of sites specified by the **archive-sites** statement.

**transfer-interval *interval*** defines the amount of time the current log file remains open (even if it has not reached the maximum possible size) and receives new statistics before it is closed and transferred to an archive site. This interval value can be from 5 through 2880 minutes.

**world-readable** enables all users to read log files. To restore the default permissions, include the **no-world-readable** statement.

#### Related Documentation

- Single-Chassis System Logging Configuration Overview
- Examples: Configuring System Logging
- [Overview of Single-Chassis System Logging Configuration on page 5505](#)

## Specifying the Facility and Severity of Messages to Include in the Log

Each system log message belongs to a *facility*, which is a group of messages that are either generated by the same software process or concern a similar condition or activity (such as authentication attempts). Each message is also preassigned a *severity level*, which indicates how seriously the triggering event affects router functions.

When you configure logging for a facility and destination, you specify a severity level for each facility. Messages from the facility that are rated at that level or higher are logged to the destination:

```
[edit system syslog]
(console | file filename | host destination | user username) {
    facility severity;
}
```

#### Related Documentation

- [Junos OS System Logging Facilities and Message Severity Levels on page 5566](#)
- Single-Chassis System Logging Configuration Overview
- Examples: Configuring System Logging
- [Overview of Single-Chassis System Logging Configuration on page 5505](#)



## Junos OS System Logging Facilities and Message Severity Levels

Table 494 on page 5566 lists the Junos system logging facilities that you can specify in configuration statements at the **[edit system syslog]** hierarchy level.

**Table 494: Junos OS System Logging Facilities**

| Facility                    | Type of Event or Error                                                                                                                            |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>any</b>                  | All (messages from all facilities)                                                                                                                |
| <b>authorization</b>        | Authentication and authorization attempts                                                                                                         |
| <b>change-log</b>           | Changes to the Junos OS configuration                                                                                                             |
| <b>conflict-log</b>         | Specified configuration is invalid on the router type                                                                                             |
| <b>daemon</b>               | Actions performed or errors encountered by system processes                                                                                       |
| <b>dfc</b>                  | Events related to dynamic flow capture                                                                                                            |
| <b>firewall</b>             | Packet filtering actions performed by a firewall filter                                                                                           |
| <b>ftp</b>                  | Actions performed or errors encountered by the FTP process                                                                                        |
| <b>interactive-commands</b> | Commands issued at the Junos OS command-line interface (CLI) prompt or by a client application such as a Junos XML protocol or NETCONF XML client |
| <b>kernel</b>               | Actions performed or errors encountered by the Junos OS kernel                                                                                    |
| <b>pfe</b>                  | Actions performed or errors encountered by the Packet Forwarding Engine                                                                           |
| <b>user</b>                 | Actions performed or errors encountered by user-space processes                                                                                   |

Table 495 on page 5566 lists the severity levels that you can specify in configuration statements at the **[edit system syslog]** hierarchy level. The levels from **emergency** through **info** are in order from highest severity (greatest effect on functioning) to lowest.

Unlike the other severity levels, the **none** level disables logging of a facility instead of indicating how seriously a triggering event affects routing functions. For more information, see “Disabling the System Logging of a Facility” on page 5555.

**Table 495: System Log Message Severity Levels**

| Severity Level | Description                                                  |
|----------------|--------------------------------------------------------------|
| <b>any</b>     | Includes all severity levels                                 |
| <b>none</b>    | Disables logging of the associated facility to a destination |



Table 495: System Log Message Severity Levels (*continued*)

| Severity Level   | Description                                                                                                             |
|------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>emergency</b> | System panic or other condition that causes the router to stop functioning                                              |
| <b>alert</b>     | Conditions that require immediate correction, such as a corrupted system database                                       |
| <b>critical</b>  | Critical conditions, such as hard errors                                                                                |
| <b>error</b>     | Error conditions that generally have less serious consequences than errors at the emergency, alert, and critical levels |
| <b>warning</b>   | Conditions that warrant monitoring                                                                                      |
| <b>notice</b>    | Conditions that are not errors but might warrant special handling                                                       |
| <b>info</b>      | Events or nonerror conditions of interest                                                                               |

#### Related Documentation

- Single-Chassis System Logging Configuration Overview
- [Overview of Single-Chassis System Logging Configuration on page 5505](#)
- Examples: Configuring System Logging

### System Log Default Facilities for Messages Directed to a Remote Destination

Table 496 on page 5567 lists the default alternative facility name next to the Junos OS-specific facility name for which it is used. For facilities that are not listed, the default alternative name is the same as the local facility name.

Table 496: Default Facilities for Messages Directed to a Remote Destination

| Junos OS-specific Local Facility | Default Facility When Directed to Remote Destination |
|----------------------------------|------------------------------------------------------|
| <b>change-log</b>                | <b>local6</b>                                        |
| <b>conflict-log</b>              | <b>local5</b>                                        |
| <b>dfc</b>                       | <b>local1</b>                                        |
| <b>firewall</b>                  | <b>local3</b>                                        |
| <b>interactive-commands</b>      | <b>local7</b>                                        |
| <b>pfe</b>                       | <b>local4</b>                                        |



- Related Documentation**
- [Single-Chassis System Logging Configuration Overview](#)
  - [Overview of Single-Chassis System Logging Configuration on page 5505](#)

## Junos OS System Log Alternate Facilities for Remote Logging

Table 497 on page 5568 lists the facilities that you can specify in the **facility-override** statement.

**Table 497: Facilities for the facility-override Statement**

| Facility             | Description                                                     |
|----------------------|-----------------------------------------------------------------|
| <b>authorization</b> | Authentication and authorization attempts                       |
| <b>daemon</b>        | Actions performed or errors encountered by system processes     |
| <b>ftp</b>           | Actions performed or errors encountered by the FTP process      |
| <b>kernel</b>        | Actions performed or errors encountered by the Junos OS kernel  |
| <b>local0</b>        | Local facility number 0                                         |
| <b>local1</b>        | Local facility number 1                                         |
| <b>local2</b>        | Local facility number 2                                         |
| <b>local3</b>        | Local facility number 3                                         |
| <b>local4</b>        | Local facility number 4                                         |
| <b>local5</b>        | Local facility number 5                                         |
| <b>local6</b>        | Local facility number 6                                         |
| <b>local7</b>        | Local facility number 7                                         |
| <b>user</b>          | Actions performed or errors encountered by user-space processes |

We do not recommend including the **facility-override** statement at the **[edit system syslog host other-routing-engine]** hierarchy level. It is not necessary to use alternative facility names when directing messages to the other Routing Engine, because its Junos OS system logging utility can interpret the Junos OS-specific names.

- Related Documentation**
- [Examples: Assigning an Alternative Facility](#)
  - [Single-Chassis System Logging Configuration Overview](#)
  - [Overview of Single-Chassis System Logging Configuration on page 5505](#)



## Changing the Alternative Facility Name for Remote System Log Messages

Some facilities assigned to messages logged on the local router or switch have Junos OS-specific names (see [Table 494 on page 5566](#)). In the recommended configuration, a remote machine designated at the `[edit system syslog host hostname]` hierarchy level is not a Juniper Networks router or switch, so its **syslogd** utility cannot interpret the Junos OS-specific names. To enable the standard **syslogd** utility to handle messages from these facilities when messages are directed to a remote machine, a standard **localX** facility name is used instead of the Junos OS-specific facility name.

[Table 496 on page 5567](#) lists the default alternative facility name next to the Junos OS-specific facility name it is used for.

The **syslogd** utility on a remote machine handles all messages that belong to a facility in the same way, regardless of the source of the message (the Juniper Networks router or switch or the remote machine itself). For example, the following statements in the configuration of the router called **local-router** direct messages from the **authorization** facility to the remote machine **monitor.mycompany.com**:

```
[edit system syslog]
host monitor.mycompany.com {
  authorization info;
}
```

The default alternative facility for the local **authorization** facility is also **authorization**. If the **syslogd** utility on **monitor** is configured to write messages belonging to the **authorization** facility to the file `/var/log/auth-attempts`, then the file contains the messages generated when users log in to **local-router** and the messages generated when users log in to **monitor**. Although the name of the source machine appears in each system log message, the mixing of messages from multiple machines can make it more difficult to analyze the contents of the **auth-attempts** file.

To make it easier to separate the messages from each source, you can assign an alternative facility to all messages generated on **local-router** when they are directed to **monitor**. You can then configure the **syslogd** utility on **monitor** to write messages with the alternative facility to a different file from messages generated on **monitor** itself.

To change the facility used for all messages directed to a remote machine, include the **facility-override** statement at the `[edit system syslog host hostname]` hierarchy level:

```
[edit system syslog host hostname]
  facility severity;
  facility-override facility;
```

In general, it makes sense to specify an alternative facility that is not already in use on the remote machine, such as one of the **localX** facilities. On the remote machine, you must also configure the **syslogd** utility to handle the messages in the desired manner.

[Table 497 on page 5568](#) lists the facilities that you can specify in the **facility-override** statement.



We do not recommend including the **facility-override** statement at the **[edit system syslog host other-routing-engine]** hierarchy level. It is not necessary to use alternative facility names when directing messages to the other Routing Engine, because its Junos OS system logging utility can interpret the Junos OS-specific names.

The following example shows how to log all messages generated on the local router at the **error** level or higher to the **local0** facility on the remote machine called **monitor.mycompany.com**:

```
[edit system syslog]
host monitor.mycompany.com {
  any error;
  facility-override local0;
}
```

The following example shows how to configure routers located in California and routers located in New York to send messages to a single remote machine called **central-logger.mycompany.com**. The messages from California are assigned to alternative facility **local0** and the messages from New York are assigned to alternative facility **local2**.

- Configure California routers to aggregate messages in the **local0** facility:

```
[edit system syslog]
host central-logger.mycompany.com {
  change-log info;
  facility-override local0;
}
```

- Configure New York routers to aggregate messages in the **local2** facility:

```
[edit system syslog]
host central-logger.mycompany.com {
  change-log info;
  facility-override local2;
}
```

On **central-logger**, you can then configure the system logging utility to write messages from the **local0** facility to the file **california-config** and the messages from the **local2** facility to the file **new-york-config**.

#### Related Documentation

- [Table 496 on page 5567](#)
- [Junos OS System Log Alternate Facilities for Remote Logging on page 5568](#)
- [Examples: Assigning an Alternative Facility](#)
- [Examples: Assigning an Alternative Facility on page 5511](#)

## Using Regular Expressions to Refine the Set of Logged Messages

The predefined facilities group together related messages, but you can also use regular expression matching to specify more exactly which messages from a facility are logged to a file, a user terminal, or a remote destination.



To specify the text string that must (or must not) appear in a message for the message to be logged to a destination, include the **match** statement and specify the regular expression which the text string must match:

```
match "regular-expression";
```

You can include this statement at the following hierarchy levels:

- **[edit system syslog file *filename*]** (for a file)
- **[edit system syslog user (*username* | \*)]** (for a specific user session or for all user sessions on a terminal)
- **[edit system syslog host (*hostname* | other-routing-engine)]** (for a remote destination)

In specifying the regular expression, use the notation defined in POSIX Standard 1003.2 for extended (modern) UNIX regular expressions. Explaining regular expression syntax is beyond the scope of this document, but POSIX standards are available from the Institute of Electrical and Electronics Engineers (IEEE, <http://www.ieee.org>).

Table 498 on page 5571 specifies which character or characters are matched by some of the regular expression operators that you can use in the match statement. In the descriptions, the term *term* refers to either a single alphanumeric character or a set of characters enclosed in square brackets, parentheses, or braces.



**NOTE:** The match statement is not case-sensitive.

**Table 498: Regular Expression Operators for the match Statement**

| Operator              | Matches                                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| . (period)            | One instance of any character except the space.                                                                                                                                                                     |
| * (asterisk)          | Zero or more instances of the immediately preceding term.                                                                                                                                                           |
| + (plus sign)         | One or more instances of the immediately preceding term.                                                                                                                                                            |
| ? (question mark)     | Zero or one instance of the immediately preceding term.                                                                                                                                                             |
| (pipe)                | One of the terms that appears on either side of the pipe operator.                                                                                                                                                  |
| ! (exclamation point) | Any string except the one specified by the expression, when the exclamation point appears at the start of the expression. Use of the exclamation point is Junos OS-specific.                                        |
| ^ (caret)             | Start of a line, when the caret appears outside square brackets.<br><br>One instance of any character that does not follow it within square brackets, when the caret is the first character inside square brackets. |
| \$ (dollar sign)      | End of a line.                                                                                                                                                                                                      |



**Table 498: Regular Expression Operators for the match Statement (*continued*)**

| Operator                     | Matches                                                                                                                                                                                                                              |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [ ] (paired square brackets) | One instance of one of the enclosed alphanumeric characters. To indicate a range of characters, use a hyphen ( - ) to separate the beginning and ending characters of the range. For example, [a-z0-9] matches any letter or number. |
| ( ) (paired parentheses)     | One instance of the evaluated value of the enclosed term. Parentheses are used to indicate the order of evaluation in the regular expression.                                                                                        |

**Using Regular Expressions** Filter messages that belong to the **interactive-commands** facility, directing those that include the string **configure** to the terminal of the root user:

```
[edit system syslog]
user root {
  interactive-commands any;
  match ".*configure.*";
}
```

Messages like the following appear on the **root** user's terminal when a user issues a **configure** command to enter configuration mode:

```
timestamp router-name mgd[PID]: UI_CMDLINE_READ_LINE: User 'user', command
'configure private'
```

Filter messages that belong to the **daemon** facility and have a severity of **error** or higher, directing them to the file **/var/log/process-errors**. Omit messages generated by the SNMP process (snmpd), instead directing them to the file **/var/log/snmpd-errors**:

```
[edit system syslog]
file process-errors {
  daemon error;
  match "!(.*snmpd.*)";
}
file snmpd-errors {
  daemon error;
  match ".*snmpd.*";
}
```


**Related Documentation**

- [Single-Chassis System Logging Configuration Overview](#)
- [Overview of Single-Chassis System Logging Configuration on page 5505](#)
- [Examples: Configuring System Logging](#)
- [Examples: Configuring System Logging on page 5509](#)



## Configuration Statements for Network Management

### connection-limit

|                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                  | <code>connection-limit <i>limit</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                         | <code>[edit system services finger],</code><br><code>[edit system services ftp],</code><br><code>[edit system services netconf ssh],</code><br><code>[edit system services ssh],</code><br><code>[edit system services telnet],</code><br><code>[edit system services xnm-clear-text],</code><br><code>[edit system services xnm-ssl]</code>                                                                                                                                                                                                  |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                     | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>                                                                                                                                                                                                                                                                                                             | Configure the maximum number of connections sessions for each type of system services (finger, ftp, ssh, telnet, xnm-clear-text, or xnm-ssl) per protocol (either IPv6 or IPv4).                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                                                                                                                                                                                                                                                                                                                 | <p><b>limit</b>—(Optional) Maximum number of established connections per protocol (either IPv6 or IPv4).</p> <p><b>Range:</b> 1 through 250</p> <p><b>Default:</b> 75</p>                                                                                                                                                                                                                                                                                                                                                                     |
| <div>  <p><b>NOTE:</b> The actual number of maximum connections depends on the availability of system resources, and might be fewer than the configured <code>connection-limit</code> value if the system resources are limited.</p> </div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                                   | <ul style="list-style-type: none"> <li>Configuring clear-text or SSL Service for Junos XML Protocol Client Applications</li> <li>Configuring DTCP-over-SSH Service for the Flow-Tap Application</li> <li>Configuring Finger Service for Remote Access to the Router</li> <li>Configuring FTP Service for Remote Access to the Router or Switch</li> <li><a href="#">Configuring SSH Service for Remote Access to the Router or Switch on page 1229</a></li> <li>Configuring Telnet Service for Remote Access to a Router or Switch</li> </ul> |



## destination-override

---

|                                 |                                                                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>destination-override {<br/>  syslog host <i>ip-address</i>;<br/>}</code>                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit system tracing]                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                 |
| <b>Description</b>              | Override the system-wide configuration of the switch at the <b>[edit system tracing]</b> hierarchy level. This statement has no effect if system tracing is not configured.                                                                                                                       |
| <b>Options</b>                  | <b>syslog</b> —System process log files to send to the remote tracing host. <ul style="list-style-type: none"><li>• <b>syslog</b>—System process log files to send to the remote tracing host.</li><li>• <b>host <i>ip-address</i></b>—IP address to which to send tracing information.</li></ul> |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Understanding Tracing and Logging Operations on page 5433</a></li><li>• <a href="#">tracing on page 274</a></li></ul>                                                                                                                         |

## no-remote-trace

---

|                                 |                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>no-remote-trace</code>                                                                                      |
| <b>Hierarchy Level</b>          | [edit system]                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                 |
| <b>Description</b>              | Configure the switch to disable remote tracing after remote tracing has been enabled.                             |
| <b>Default</b>                  | Remote tracing is disabled.                                                                                       |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">tracing on page 274</a></li></ul>                             |



---

## protocol-version

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>protocol-version <i>version</i>;</code>                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit system services ssh]                                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Specify the secure shell (SSH) protocol version.                                                                                                                                               |
| <b>Default</b>                  | <b>v2</b> —SSH protocol version 2 is the default, introduced in Junos OS Release 11.4.                                                                                                         |
| <b>Options</b>                  | <b><i>version</i></b> —SSH protocol version: <b>v1</b> , <b>v2</b> , or both.                                                                                                                  |
| <b>Required Privilege Level</b> | <b>admin</b> —To view this statement in the configuration.<br><b>admin-control</b> —To add this statement to the configuration.                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the SSH Protocol Version on page 1230</a></li></ul>                                                                            |



## rate-limit

---

|                                 |                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>rate-limit <i>limit</i>;</code>                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit system services finger],<br>[edit system services ftp],<br>[edit system services netconf ssh],<br>[edit system services ssh],<br>[edit system services telnet],<br>[edit system services xnm-clear-text],<br>[edit system services xnm-ssl] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                    |
| <b>Description</b>              | Configure the maximum number of connections attempts per protocol (either IPv6 or IPv4) on an access service.                                                                                                                                     |
| <b>Default</b>                  | 150 connections                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <b><code>rate-limit <i>limit</i></code></b> —(Optional) Maximum number of connection attempts allowed per minute, per IP protocol (either IPv4 or IPv6).<br><b>Range:</b> 1 through 250<br><b>Default:</b> 150                                    |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring clear-text or SSL Service for Junos XML Protocol Client Applications</li></ul>                                                                                                                  |



## ssh

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>ssh {   ciphers [ <i>cipher-1 cipher-2 cipher-3 ...</i>];   client-alive-count-max <i>seconds</i>;   client-alive-interval <i>seconds</i>;   connection-limit <i>limit</i>;   hostkey-algorithm &lt;<i>algorithm</i> no-<i>algorithm</i>&gt;;   key-exchange &lt;<i>algorithm</i>&gt;;   macs &lt;<i>algorithm</i>&gt;;   max-sessions-per-connection &lt;<i>number</i>&gt;;   no-tcp-forwarding;   protocol-version [<i>v1 v2</i>];   rate-limit <i>limit</i>;   root-login (<i>allow</i>   <i>deny</i>   <i>deny-password</i>); }</pre> |
| <b>Hierarchy Level</b>          | [edit system services]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> <p><b>client-alive-interval</b> and <b>client-alive-max-count</b> statements introduced in Junos OS Release 12.2.</p>                                                                                                                                                                                                            |
| <b>Description</b>              | <p>Allow SSH requests from remote systems to the local router or switch.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring SSH Service for Remote Access to the Router or Switch on page 1229</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                             |




## telnet

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>telnet {<br/>    connection-limit <i>limit</i>;<br/>    rate-limit <i>limit</i>;<br/>}</pre>                                                                                              |
| <b>Hierarchy Level</b>          | [edit system services]                                                                                                                                                                         |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Provide Telnet connections from remote systems to the local router or switch.<br><br>The remaining statements are explained separately.                                                        |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring Telnet Service for Remote Access to a Router or Switch</li></ul>                                                                             |



## tracing

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | tracing {<br>destination-override syslog host <i>ip-address</i> ;<br>}                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit system]                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Configure the switch to enable remote tracing to a specified host IP address.                                                                                                                                                                                                                                                                                                                                                                                 |
|                                 | <div>  <p><b>NOTE:</b> The <b>tracing</b> statement is not supported on the QFX3000 QFabric system.</p> </div>                                                                                                                                                                                                                                                               |
|                                 | <p>The following processes are supported:</p> <ul style="list-style-type: none"> <li>• <b>chassisd</b>—Chassis-control process</li> <li>• <b>eventd</b>—Event-processing process</li> <li>• <b>cosd</b>—Class-of-service process</li> </ul> <p>If you enabled remote tracing but wish to disable it for specific processes on the switch, use the <b>no-remote-trace</b> statement at the <b>[edit system process-name traceoptions]</b> hierarchy level.</p> |
| <b>Default</b>                  | Remote tracing is disabled by default.                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <b>destination-override syslog host <i>ip-address</i></b> —Overrides the global configuration for system tracing and has no effect if the <b>tracing</b> statement is not configured.                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Tracing and Logging Operations on page 5433</a></li> <li>• <a href="#">destination-override on page 224</a></li> </ul>                                                                                                                                                                                                                                                                     |



## Configuration Statements for Automation Scripts

---

### allow-transients

---

|                                 |                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | allow-transients;                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit system scripts commit]                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                     |
| <b>Description</b>              | For Junos OS commit scripts, enable transient configuration changes to be committed.                                                                                                                                                                   |
| <b>Default</b>                  | Transient changes are disabled by default. If you do not include the <b>allow-transients</b> statement, and an enabled script generates transient changes, the command-line interface (CLI) generates an error message and the commit operation fails. |
| <b>Required Privilege Level</b> | maintenance—To view this statement in the configuration.<br>maintenance-control—To add this statement to the configuration.                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Generating a Persistent or Transient Change</li><li>Creating a Macro to Read the Custom Syntax and Generate Related Configuration Statements</li></ul>                                                           |



## apply-macro

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>apply-macro <i>apply-macro-name</i> {<br/>    <i>parameter-name parameter-value</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | All hierarchy levels                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | <p>With commit script macros, use custom syntax in your configuration.</p> <p>Macros work by locating <b>apply-macro</b> statements that you include in the candidate configuration and using the values specified in the <b>apply-macro</b> statement as parameters to a set of instructions (the macro) defined in a commit script. The commit script alters your configuration from one that contains custom syntax into a full configuration containing standard Junos OS statements.</p> <p>In effect, your custom configuration syntax serves a dual purpose. The syntax allows you to simplify your configuration tasks, and it provides data (or <i>hooks</i>) that are used by a commit script macros.</p> <p>You can include the <b>apply-macro</b> statement at any level of the configuration hierarchy. You can include multiple <b>apply-macro</b> statements at each level of the configuration hierarchy; however, each must have a unique name.</p> |
| <b>Options</b>                  | <p><b><i>apply-macro-name</i></b>—Name of the <b>apply-macro</b> statement.</p> <p><b><i>parameter-name</i></b>—One or more parameters. Parameters can be any text you want to include in your configuration.</p> <p><b><i>parameter-value</i></b>—A value that corresponds to the parameter name. Parameter values can be any text you want to include in your configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | configure—To enter configuration mode; other required privilege levels depend on where the statement is located in the configuration hierarchy.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Overview of Creating Custom Configuration Syntax with Macros</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |



## checksum

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>checksum (md5   sha-256   sha1) hash;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit event-options event-script file <i>filename</i> ],<br>[edit system <b>scripts commit file</b> <i>filename</i> ],<br>[edit system <b>scripts op file</b> <i>filename</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.5.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | For Junos OS commit scripts and op scripts, specify the MD5, SHA-1, or SHA-256 checksum hash. When it executes a local event, commit, or op script, Junos OS verifies the authenticity of the script by using the configured checksum hash.                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                  | <b>md5 hash</b> —MD5 checksum of this script.<br><br><b>sha-256 hash</b> —SHA-256 checksum of this script.<br><br><b>sha1 hash</b> —SHA-1 checksum of this script.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | <b>maintenance</b> —To view this statement in the configuration.<br><b>maintenance-control</b> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Configuring Checksum Hashes for a Commit Script</li><li>• Configuring Checksum Hashes for an Event Script</li><li>• Configuring Checksum Hashes for an Op Script</li><li>• Executing an Op Script from a Remote Site</li><li>• <a href="#">file checksum md5 on page 296</a> command in the <i>System Basics and Services Command Reference</i></li><li>• <a href="#">file checksum sha-256 on page 298</a> command in the <i>System Basics and Services Command Reference</i></li><li>• <a href="#">file checksum sha1 on page 297</a> command in the <i>System Basics and Services Command Reference</i></li></ul> |



---

## command

---

|                                 |                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>command <i>filename-alias</i>;</code>                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit system <a href="#">scripts op file</a> <i>filename</i> ]                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.6.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                          |
| <b>Description</b>              | For Junos OS op scripts, configure a filename alias for the script file. This allows you to run the script by referencing either the script filename or the filename alias. |
| <b>Options</b>                  | <i>filename-alias</i> —Alias for the script file.                                                                                                                           |
| <b>Required Privilege Level</b> | maintenance—To view this statement in the configuration.<br>maintenance-control—To add this statement to the configuration.                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Enabling an Op Script and Defining a Script Alias</li></ul>                                                                           |



## commit

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>commit {   allow-transients;   direct-access;   file <i>filename</i> {     checksum (md5   sha-256   sha1) <i>hash</i>;     optional;     refresh;     refresh-from <i>url</i>;     source <i>url</i>;   }   max-datasize   refresh;   refresh-from <i>url</i>;   traceoptions {     file &lt;<i>filename</i>&gt; &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i>;     no-remote-trace;   } }</pre> |
| <b>Hierarchy Level</b>          | [edit system <a href="#">scripts</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | For Junos OS commit scripts, configure the commit-time scripting mechanism.                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>                  | The statements are explained separately.                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | maintenance—To view this statement in the configuration.<br>maintenance-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Storing and Enabling Scripts</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                   |



## description

---

|                                 |                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>description <i>descriptive-text</i>;</code>                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit system <a href="#">scripts op file filename</a> ]<br>[edit system <a href="#">scripts op file filename</a> arguments <i>argument-name</i> ]                                         |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.6.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                        |
| <b>Description</b>              | For Junos OS op scripts, provide a help-text string that appears in the command-line interface (CLI).                                                                                     |
| <b>Required Privilege Level</b> | maintenance—To view this statement in the configuration.<br>maintenance-control—To add this statement to the configuration.                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring Help Text for Op Scripts</li> <li>Declaring Arguments in Op Scripts</li> <li><a href="#">file (Op Scripts) on page 5587</a></li> </ul> |

## direct-access

---

|                                 |                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>direct-access;</code>                                                                                                 |
| <b>Hierarchy Level</b>          | [edit system <a href="#">scripts commit</a> ]                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.1.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.          |
| <b>Description</b>              | Specify that commit scripts read input configurations directly from the database when inspecting these scripts for errors.  |
| <b>Required Privilege Level</b> | maintenance—To view this statement in the configuration.<br>maintenance-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Executing Large Commit Scripts</li> </ul>                                            |



## file (Commit Scripts)

---

|                                 |                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>file <i>filename</i> {<br/>    checksum (md5   sha-256   sha1) <i>hash</i>;<br/>    optional;<br/>    refresh;<br/>    refresh-from <i>url</i>;<br/>    source <i>url</i>;<br/>}</pre>                                                |
| <b>Hierarchy Level</b>          | [edit system <a href="#">scripts commit</a> ]                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                         |
| <b>Description</b>              | For Junos OS commit scripts, enable a commit script that is located in the <code>/var/db/scripts/commit</code> directory.                                                                                                                  |
| <b>Options</b>                  | <p><b><i>filename</i></b>—Name of an Extensible Stylesheet Language Transformations (XSLT) or Stylesheet Language Alternative Syntax (SLAX) file containing a commit script.</p> <p>The remaining statements are explained separately.</p> |
| <b>Required Privilege Level</b> | <p><b>maintenance</b>—To view this statement in the configuration.</p> <p><b>maintenance-control</b>—To add this statement to the configuration.</p>                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Controlling Execution of Commit Scripts During Commit Operations</li></ul>                                                                                                                           |



## file (Op Scripts)

**Syntax**

```
file filename {
  arguments {
    argument-name {
      description descriptive-text;
    }
  }
  checksum (md5 | sha-256 | sha1) hash;
  command filename-alias;
  description descriptive-text;
  refresh;
  refresh-from url;
  source url;
}
```

**Hierarchy Level** [edit system **scripts op**]

**Release Information** Statement introduced in Junos OS Release 7.6.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** For Junos OS op scripts, enable an op script that is located in the `/var/db/scripts/op` directory.

**Options** *filename*—The name of an Extensible Stylesheet Language Transformations (XSLT) or Stylesheet Language Alternative Syntax (SLAX) file containing an op script.

The statements are explained separately.

**Required Privilege Level** maintenance—To view this statement in the configuration.  
maintenance-control—To add this statement to the configuration.

**Related Documentation**

- Enabling an Op Script and Defining a Script Alias



## no-allow-url

---

|                                 |                                                                                                                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-allow-url;                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit system <a href="#">scripts op</a> ]                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.0.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                  |
| <b>Description</b>              | For Junos OS op scripts, prohibit the remote execution of scripts. When you include this configuration statement, the <b>op url</b> operational mode command generates an error and does not permit you to execute the op script from a remote site. |
| <b>Required Privilege Level</b> | maintenance—To view this statement in the configuration.<br>maintenance-control—To add this statement to the configuration.                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">file (Op Scripts) on page 5587</a></li><li>• Executing an Op Script from a Remote Site</li></ul>                                                                                                 |



## op

```
Syntax  op {
        file filename {
            arguments {
                argument-name {
                    description descriptive-text;
                }
            }
        }
        checksum (md5 | sha-256 | sha1) hash;
        command filename-alias;
        description descriptive-text;
        max-datasize
        refresh;
        refresh-from url;
        source url;
    }
    no-allow-url
    refresh;
    refresh-from url;
    traceoptions {
        file <filename> <files number> <size size> <world-readable | no-world-readable>;
        flag flag;
        no-remote-trace;
    }
}
```

**Hierarchy Level** [edit system [scripts](#)]

**Release Information** Statement introduced in Junos OS Release 7.6.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** For Junos OS op scripts, configure an operation scripting mechanism.

**Options** The statements are explained separately.

**Required Privilege Level** maintenance—To view this statement in the configuration.  
maintenance-control—To add this statement to the configuration.


**Related Documentation**

- Storing and Enabling Scripts




## optional

---

|                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                     | optional;                                                                                                                                                                                             |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                            | [edit system <b>scripts commit</b> file <i>filename</i> ]                                                                                                                                             |
| <b>Release Information</b>                                                                                                                                                                                                                                        | Statement introduced in Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                    |
| <b>Description</b>                                                                                                                                                                                                                                                | For Junos OS commit scripts, allow a commit operation to succeed even if the script specified in the <b>file</b> statement is missing from the <b>/var/db/scripts/commit</b> directory on the device. |
| <div> <b>NOTE:</b> On the QFabric system, commit scripts are stored in the <b>/pbdata/mgd_shared/partition-ip/var/db/scripts/commit/</b> directory on the Director device.</div> |                                                                                                                                                                                                       |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                   | maintenance—To view this statement in the configuration.<br>maintenance-control—To add this statement to the configuration.                                                                           |
| <b>Related Documentation</b>                                                                                                                                                                                                                                      | <ul style="list-style-type: none"><li>Controlling Execution of Commit Scripts During Commit Operations</li></ul>                                                                                      |




## refresh (Commit Scripts)

|                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                    | refresh;                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                           | [edit system <a href="#">scripts commit</a> ],<br>[edit system <a href="#">scripts commit</a> file <i>filename</i> ]                                                                                                                                                                          |
| <b>Release Information</b>                                                                                                                                                                                                                                                       | Statement introduced in Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                            |
| <b>Description</b>                                                                                                                                                                                                                                                               | For Junos OS commit scripts, overwrite the local copy of all enabled commit scripts or a single enabled script located in the <code>/var/db/scripts/commit</code> directory with the copy located at the source URL, as specified in the <b>source</b> statement at the same hierarchy level. |
| <div>  <p><b>NOTE:</b> On the QFabric system, commit scripts are stored in the <code>/pbdata/mgd_shared/partition-ip/var/db/scripts/commit/</code> directory on the Director device.</p> </div> |                                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                  | maintenance—To view this statement in the configuration.<br>maintenance-control—To add this statement to the configuration.                                                                                                                                                                   |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                     | <ul style="list-style-type: none"> <li>Using a Master Source Location for a Script</li> <li><a href="#">refresh-from (Commit Scripts) on page 5593</a></li> <li><a href="#">source (Commit Scripts) on page 5596</a></li> </ul>                                                               |




## refresh (Op Scripts)

---

|                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                   | refresh;                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                          | [edit system <a href="#">scripts op</a> ],<br>[edit system <a href="#">scripts op file filename</a> ]                                                                                                                                                                          |
| <b>Release Information</b>                                                                                                                                                                                                                                      | Statement introduced in Junos OS Release 7.6.<br>Statement introduced in Junos OS Release 11.1 on the QFX Series.                                                                                                                                                              |
| <b>Description</b>                                                                                                                                                                                                                                              | For Junos OS op scripts, overwrite the local copy of all enabled op scripts or a single enabled script located in the <code>/var/db/scripts/op</code> directory with the copy located at the source URL, specified in the <b>source</b> statement at the same hierarchy level. |
| <div> <b>NOTE:</b> On the QFabric system, op scripts are stored in the <code>/pbdata/mgd_shared/partition-ip/var/db/scripts/op/</code> directory on the Director device.</div> |                                                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                 | maintenance—To view this statement in the configuration.<br>maintenance-control—To add this statement to the configuration.                                                                                                                                                    |
| <b>Related Documentation</b>                                                                                                                                                                                                                                    | <ul style="list-style-type: none"><li>Using a Master Source Location for a Script</li><li><a href="#">refresh-from (Op Scripts) on page 5594</a></li><li><a href="#">source (Op Scripts) on page 5597</a></li></ul>                                                            |




## refresh-from (Commit Scripts)

|                                                                                                                                                                           |                                                                                                                                                                                                                                                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                             | <code>refresh-from url;</code>                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>                                                                                                                                                    | [edit system <a href="#">scripts commit</a> ],<br>[edit system <a href="#">scripts commit</a> file <i>filename</i> ]                                                                                                                                                    |
| <b>Release Information</b>                                                                                                                                                | Statement introduced in Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                      |
| <b>Description</b>                                                                                                                                                        | For Junos OS commit scripts, overwrite the local copy of all enabled commit scripts or a single enabled script located in the <code>/var/db/scripts/commit</code> directory with the copy located at a URL other than the URL specified in the <b>source</b> statement. |
| <div>  <p><b>NOTE:</b> This statement is not supported on the QFabric system.</p> </div> |                                                                                                                                                                                                                                                                         |
| <b>Options</b>                                                                                                                                                            | <b>url</b> —The source specified as a Hypertext Transfer Protocol (HTTP) URL, FTP URL, or secure copy (scp)-style remote file specification.                                                                                                                            |
| <b>Required Privilege Level</b>                                                                                                                                           | <b>maintenance</b> —To view this statement in the configuration.<br><b>maintenance-control</b> —To add this statement to the configuration.                                                                                                                             |
| <b>Related Documentation</b>                                                                                                                                              | <ul style="list-style-type: none"> <li>Using an Alternate Source Location for a Script</li> <li><a href="#">refresh (Commit Scripts) on page 5591</a></li> <li><a href="#">source (Commit Scripts) on page 5596</a></li> </ul>                                          |



## refresh-from (Op Scripts)

---

|                                                                                                                                                                  |                                                                                                                                                                                                                                                             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                    | <code>refresh-from url;</code>                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>                                                                                                                                           | [edit system <a href="#">scripts op</a> ],<br>[edit system <a href="#">scripts op file filename</a> ]                                                                                                                                                       |
| <b>Release Information</b>                                                                                                                                       | Statement introduced in Junos OS Release 7.6.<br>Statement introduced in Junos OS Release 11.1 on the QFX Series.                                                                                                                                           |
| <b>Description</b>                                                                                                                                               | For Junos OS op scripts, overwrite the local copy of all enabled op scripts or a single enabled script located in the <code>/var/db/scripts/op</code> directory with the copy located at a URL other than the URL specified in the <b>source</b> statement. |
| <div> <b>NOTE:</b> This statement is not supported on the QFabric system.</div> |                                                                                                                                                                                                                                                             |
| <b>Options</b>                                                                                                                                                   | <b>url</b> —Source specified as a Hypertext Transfer Protocol (HTTP) URL, FTP URL, or secure copy (scp)-style remote file specification.                                                                                                                    |
| <b>Required Privilege Level</b>                                                                                                                                  | <b>maintenance</b> —To view this statement in the configuration.<br><b>maintenance-control</b> —To add this statement to the configuration.                                                                                                                 |
| <b>Related Documentation</b>                                                                                                                                     | <ul style="list-style-type: none"><li>Using an Alternate Source Location for a Script</li><li><a href="#">refresh (Op Scripts) on page 5592</a></li><li><a href="#">source (Op Scripts) on page 5597</a></li></ul>                                          |



## scripts

```
Syntax  scripts {
        commit {
            allow-transients;
            direct-access;
            file filename {
                checksum (md5 | sha-256 | sha1) hash;
                optional;
                refresh;
                refresh-from url;
                source url;
            }
            max-datasize
            refresh;
            refresh-from url;
            traceoptions {
                file <filename> <files number> <size size> <world-readable | no-world-readable>;
                flag flag;
                no-remote-trace;
            }
        }
        op {
            file filename {
                arguments {
                    argument-name {
                        description descriptive-text;
                    }
                }
                checksum (md5 | sha-256 | sha1) hash;
                command filename-alias;
                description descriptive-text;
                max-datasize
                refresh;
                refresh-from url;
                source url;
            }
            no-allow-url
            refresh;
            refresh-from url;
            traceoptions {
                file <filename> <files number> <size size> <world-readable | no-world-readable>;
                flag flag;
                no-remote-trace;
            }
        }
    }
```

Hierarchy Level [edit system]

**Release Information** Statement introduced in Junos OS Release 7.4.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** For Junos OS commit or op scripts, configure scripting mechanisms.





NOTE: The `traceoptions` statement is not supported on QFabric systems.

|                          |                                                                                                                             |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Options                  | The statements are explained separately.                                                                                    |
| Required Privilege Level | maintenance—To view this statement in the configuration.<br>maintenance-control—To add this statement to the configuration. |
| Related Documentation    | <ul style="list-style-type: none"><li>Storing and Enabling Scripts</li></ul>                                                |

---

## source (Commit Scripts)

---

|                     |                                                                                                                                                                                                                                                                                                                                            |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax              | <code>source url;</code>                                                                                                                                                                                                                                                                                                                   |
| Hierarchy Level     | [edit system <a href="#">scripts commit file</a> <i>filename</i> ]                                                                                                                                                                                                                                                                         |
| Release Information | Statement introduced in Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                         |
| Description         | For Junos OS commit scripts, specify the location of the source file for an enabled script located in the <code>/var/db/scripts/commit</code> directory. When you include the <b>refresh</b> statement at the same hierarchy level and commit the configuration, the local copy is overwritten by the version stored at the specified URL. |




NOTE: On the QFabric system, commit scripts are stored in the `/pbdata/mgd_shared/partition-ip/var/db/scripts/op/` directory on the Director device.

|                          |                                                                                                                                                                                                                                                                                        |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Options                  | <i>url</i> —The source specified as an HTTP URL, FTP URL, or scp-style remote file specification.                                                                                                                                                                                      |
| Required Privilege Level | maintenance—To view this statement in the configuration.<br>maintenance-control—To add this statement to the configuration.                                                                                                                                                            |
| Related Documentation    | <ul style="list-style-type: none"><li>Using a Master Source Location for a Script</li><li>Overview of Updating Scripts from a Remote Source</li><li><a href="#">refresh (Commit Scripts) on page 5591</a></li><li><a href="#">refresh-from (Commit Scripts) on page 5593</a></li></ul> |



## source (Op Scripts)

|                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                | <code>source url;</code>                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                       | [edit system <a href="#">scripts op file filename</a> ]                                                                                                                                                                                                                                               |
| <b>Release Information</b>                                                                                                                                                                                                                                                   | Statement introduced in Junos OS Release 7.6.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                    |
| <b>Description</b>                                                                                                                                                                                                                                                           | For Junos OS op scripts, specify the location of the source file for an enabled script located in the <code>/var/db/scripts/op</code> directory. When you include the <b>refresh</b> statement at the same hierarchy level, the local copy is overwritten by the version stored at the specified URL. |
| <div>  <p><b>NOTE:</b> On the QFabric system, commit scripts are stored in the <code>/pbdata/mgd_shared/partition-ip/var/db/scripts/op/</code> directory on the Director device.</p> </div> |                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                                                                                                                                                                                                                                                               | <b>url</b> —Master source file for an op script specified as an HTTP URL, FTP URL, or scp-style remote file specification.                                                                                                                                                                            |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                              | maintenance—To view this statement in the configuration.<br>maintenance-control—To add this statement to the configuration.                                                                                                                                                                           |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                 | <ul style="list-style-type: none"> <li>Using a Master Source Location for a Script</li> <li><a href="#">refresh (Op Scripts) on page 5592</a></li> <li><a href="#">refresh-from (Op Scripts) on page 5594</a></li> </ul>                                                                              |



## Configuration Statements for Fabric OAM

---

### ethernet-frame-size

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ethernet-frame-size <i>ethernet-frame-size</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit protocols oam fabric flow-specs <i>flow-specification-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | Configure the Ethernet frame size in the flow specification parameters for internal fabric monitoring.                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <b><i>ethernet-frame-size</i></b> —Integer defining the size (in bytes) of the Ethernet frame.<br><b>Range:</b> 256 to 9116 bytes                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Overview of Internal Fabric Monitoring on page 5451</a></li><li>• <a href="#">Configuring a Fabric Maintenance Association on page 5527</a></li><li>• <a href="#">Configuring Flow Specifications on page 5528</a></li><li>• <a href="#">fabric (OAM) on page 5599</a></li><li>• <a href="#">ping fabric multicast-flow on page 5757</a></li><li>• <a href="#">ping fabric unicast-flow on page 5759</a></li><li>• <a href="#">traceroute fabric unicast-flow on page 5806</a></li></ul> |



## fabric (OAM)

```

Syntax  fabric {
        fabric-maintenance-associations {
            fma-name {
                description string;
                fabric-maintenance-end-points {
                    fmep-id {
                        description string;
                        fmep-interface interface-name;
                        fmep-name name;
                    }
                }
                vlan-name vlan-name;
            }
        }
        flow-specs {
            flow-specification-name {
                ethernet-frame-size size;
                multicast-ipv4 {
                    dest-ip-multicast-group ipv4-mcast-address;
                    source-ip ipv4-address;
                }
                multicast-vlan-flood;
                unicast-ethernet {
                    destination-mac destination-mac-address destination-mac-mask
                        destination-mac-mask;
                    ethertype ethertype;
                    source-mac mac-address source-mac-mask source-mac-mask;
                }
                unicast-ethernet-ipv4 {
                    destination-ip destination-ip-address destination-ip-mask destination-ip-mask;
                    destination-l4-port destination-l4-port-number;
                    destination-mac destination-mac-address;
                    ip-proto protocol;
                    source-ip source-ip-address source-ip-mask source-ip-mask;
                    source-l4-port source-l4-port-number;
                }
            }
        }
        faboam-trace-options {
            file filename{
                files number;
                no-stamp;
                no-world-readable;
                replace;
                size size;
                world-readable;
            }
            flag {
                all;
                debug-all;
                ffping;
                generic;
            }
        }
    }

```



```
        netio;  
        packets;  
        trace-route;  
    }  
}  
}
```

**Hierarchy Level** [edit protocols oam]

**Release Information** Statement introduced in Junos OS Release 12.2 for the QFX Series.

**Description** Configure the fabric maintenance association (FMA) and flow specification parameters for internal fabric monitoring.

The remaining statements are explained separately.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Overview of Internal Fabric Monitoring on page 5451](#)
- [Configuring a Fabric Maintenance Association on page 5527](#)
- [Configuring Flow Specifications on page 5528](#)
- [ping fabric multicast-flow on page 5757](#)
- [ping fabric unicast-flow on page 5759](#)
- [traceroute fabric unicast-flow on page 5806](#)



## fabric-maintenance-associations

```
Syntax fabric-maintenance-associations {
    fma-name {
        description string;
        fabric-maintenance-end-points {
            fmep-id {
                description string;
                fmep-interface interface-name;
                fmep-name name;
            }
        }
        vlan-name vlan-name;
    }
}
```

**Hierarchy Level** [edit protocols oam fabric]

**Release Information** Statement introduced in Junos OS Release 12.2 for the QFX Series.

**Description** Configure the fabric maintenance association (FMA) parameters for internal fabric monitoring. The FMA defines a set of QFabric system interfaces (fabric maintenance endpoints [FMEPs]) that are members of a given VLAN which are used in internal fabric monitoring operations. The FMA associates the set of FMEPs with a VLAN. Configuration of the VLAN is mandatory.

The remaining statements under this hierarchy level are explained separately.

**Options** **description *string***—Description of the FMA.

**Syntax:** 1 to 128 alphanumeric characters

**fma-name**—Name of the FMA.

**Syntax:** 1 to 20 alphanumeric characters

**vlan-name *vlan-name***—Name of the VLAN for which the FMA is defined.



**NOTE:** Configuring the VLAN option is mandatory.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Overview of Internal Fabric Monitoring on page 5451](#)
- [Configuring a Fabric Maintenance Association on page 5527](#)
- [Configuring Flow Specifications on page 5528](#)
- [fabric \(OAM\) on page 5599](#)
- [ping fabric multicast-flow on page 5757](#)



- [ping fabric unicast-flow on page 5759](#)
- [traceroute fabric unicast-flow on page 5806](#)

## **fabric-maintenance-end-points**

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>fabric-maintenance-end-points {<br/>    fmep-id {<br/>        description <i>string</i>;<br/>        fmep-interface <i>interface-name</i>;<br/>        fmep-name <i>name</i>;<br/>    }<br/>}</pre>                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit protocols oam fabric fabric-maintenance-associations <i>fma-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Configure the fabric maintenance association endpoint (FMEP) parameters within a fabric maintenance association (FMA). The FMA associates the FMEP with a VLAN for purposes of internal fabric monitoring.                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <p><b>description <i>string</i></b>—Description of the FMEP.<br/><b>Syntax:</b> 1 to 128 alphanumeric characters</p> <p><b><i>fmep-id</i></b>—32-bit integer that is used to identify an FMEP.<br/><b>Range:</b> 1 to 64,000</p> <p><b><i>fmep-name name</i></b>—Name of the fabric maintenance association endpoint.<br/><b>Syntax:</b> 1 to 20 alphanumeric characters</p> <p><b><i>fmep-interface interface-name</i></b>—Interface on a QFabric system Node device.<br/><b>Syntax:</b> <i>node-device-name:interface-type-fpc/pic/slot.unit</i></p> |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Overview of Internal Fabric Monitoring on page 5451</a></li><li>• <a href="#">Configuring a Fabric Maintenance Association on page 5527</a></li><li>• <a href="#">Configuring Flow Specifications on page 5528</a></li><li>• <a href="#">fabric (OAM) on page 5599</a></li><li>• <a href="#">ping fabric multicast-flow on page 5757</a></li><li>• <a href="#">ping fabric unicast-flow on page 5759</a></li><li>• <a href="#">traceroute fabric unicast-flow on page 5806</a></li></ul>           |



## flow-specs

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> flow-specs {   flow-specification-name {     ethernet-frame-size ethernet-frame-size;     multicast-ipv4 {       dest-ip-multicast-group ipv4-mcast-address;       source-ip ipv4-address;     }     multicast-vlan-flood;     unicast-ethernet {       destination-mac destination-mac-address destination-mac-mask         destination-mac-mask;       ethertype ethertype;       source-mac mac-address source-mac-mask source-mac-mask;     }     unicast-ethernet-ipv4 {       destination-ip destination-ip-address destination-ip-mask destination-ip-mask;       destination-l4-port destination-l4-port-number;       destination-mac destination-mac-address;       ip-proto protocol;       source-ip source-ip-address source-ip-mask source-ip-mask;       source-l4-port source-l4-port-number;     }   } } </pre> |
| <b>Hierarchy Level</b>          | [edit protocols oam fabric]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | <p>Configure the fabric flow specification parameters for internal fabric monitoring. The following conditions apply:</p> <ul style="list-style-type: none"> <li>You must specify a protocol type for each flow specification: <b>unicast-ethernet</b>, <b>unicast-ethernet-ipv4</b>, <b>multicast-ipv4</b>, or <b>multicast-vlan-flood</b>.</li> <li>You can specify only one type for each flow specification.</li> <li>All other parameters are optional.</li> </ul> <p>The remaining statements under this hierarchy level are explained separately.</p>                                                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <p><b>flow-specification-name</b>—Name of the flow specification.</p> <p><b>Syntax:</b> 1 to 20 alphanumeric characters</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">Overview of Internal Fabric Monitoring on page 5451</a></li> <li><a href="#">Configuring a Fabric Maintenance Association on page 5527</a></li> <li><a href="#">Configuring Flow Specifications on page 5528</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |



- [fabric \(OAM\) on page 5599](#)
- [ping fabric multicast-flow on page 5757](#)
- [ping fabric unicast-flow on page 5759](#)
- [traceroute fabric unicast-flow on page 5806](#)



## unicast-ethernet-ipv4

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>unicast-ethernet-ipv4 {     source-ip <i>source-ip-address</i> source-ip-mask <i>source-ip-mask</i>;     destination-ip <i>destination-ip-address</i> destination-ip-mask <i>destination-ip-mask</i>;     ip-proto <i>protocol</i>;     source-l4-port <i>source-l4-port-number</i>;     destination-l4-port <i>destination-l4-port-number</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>     | [edit protocols oam fabric flow-specs <i>flow-specification-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b> | Statement introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>         | Configure unicast parameters for the Ethernet IPv4 protocol type in the internal fabric monitoring flow specifications.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>             | <p><b>destination-ip <i>destination-ip-address</i></b>—Unicast IPv4 address of the destination fabric maintenance endpoint (FMEP) that is configured in the fabric maintenance association (FMA).</p> <p><b>Syntax:</b> Dotted decimal notation without the prefix</p> <p><b>destination-l4-port <i>destination-l4-port-number</i></b>—L4 TCP or UDP port for the destination fabric maintenance endpoint (FMEP).</p> <p><b>Values:</b> 2-byte decimal or hexadecimal notation</p> <p><b>ip-proto <i>protocol</i></b>—IPv4 protocol type.</p> <p><b>Values:</b> 1-byte value in decimal or hexadecimal notation</p> <p><b>destination-ip-mask <i>destination-ip-mask</i></b>—IPv4 address range mask for the destination FMEP that is configured in the flow specification.</p> <p>The masked bits denote the range that needs to be generated. The other bits obtain their values from the corresponding source or destination IPv4 address parameter. The mask must be contiguous.</p> <p><b>Syntax:</b> Dotted decimal notation without the prefix</p> <p><b>Values:</b> Maximum of 6 contiguous masked bits, or a mask range of 64</p> <p><b>source-ip <i>source-ip-address</i></b>—Unicast IPv4 address of the source fabric maintenance endpoint (FMEP) that is configured in the fabric maintenance association (FMA).</p> <p><b>Syntax:</b> Dotted decimal notation without the prefix</p> <p><b>source-l4-port <i>source-l4-port-number</i></b>—TCP or UDP port for the source fabric maintenance endpoint (FMEP).</p> <p><b>Values:</b> 2-byte decimal or hexadecimal notation</p> <p><b>source-ip-mask <i>source-ip-mask</i></b>—IPv4 address range mask for the source FMEP that is configured in the flow specification.</p> |



The masked bits denote the range that needs to be generated. The other bits obtain their values from the corresponding source or destination IPv4 address parameter. The mask must be contiguous.

**Syntax:** Dotted decimal notation without the prefix

**Values:** Maximum of 6 contiguous masked bits, or a mask range of 64

|                                 |                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration. |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------|

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Overview of Internal Fabric Monitoring on page 5451</a></li><li>• <a href="#">Configuring a Fabric Maintenance Association on page 5527</a></li><li>• <a href="#">Configuring Flow Specifications on page 5528</a></li><li>• <a href="#">fabric (OAM) on page 5599</a></li><li>• <a href="#">ping fabric multicast-flow on page 5757</a></li><li>• <a href="#">ping fabric unicast-flow on page 5759</a></li><li>• <a href="#">traceroute fabric unicast-flow on page 5806</a></li></ul> |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



## multicast-ipv4

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>multicast-ipv4 {   source-ip <i>source-ip-address</i>;   dest-ip-multicast-group <i>ipv4-mcast-address</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit protocols oam fabric flow-specs <i>flow-specification-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | Configure multicast parameters for the IPv4 Ethernet protocol type in the internal fabric monitoring flow specifications.                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <p><b>dest-ip-multicast-group <i>ipv4-mcast-address</i></b>—IPv4 multicast group address of the destination fabric maintenance endpoint (FMEP) that is configured in the flow specification. Configuration of this parameter is mandatory.</p> <p><b>Syntax:</b> Dotted decimal notation without the prefix</p> <p><b>source-ip <i>source-ip-address</i></b>—(Optional) IPv4 multicast address of the source fabric maintenance endpoint (FMEP) that is configured in the flow specification.</p> <p><b>Syntax:</b> Dotted decimal notation without the prefix</p> |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Overview of Internal Fabric Monitoring on page 5451</a></li> <li>• <a href="#">Configuring a Fabric Maintenance Association on page 5527</a></li> <li>• <a href="#">Configuring Flow Specifications on page 5528</a></li> <li>• <a href="#">fabric (OAM) on page 5599</a></li> <li>• <a href="#">ping fabric multicast-flow on page 5757</a></li> <li>• <a href="#">ping fabric unicast-flow on page 5759</a></li> <li>• <a href="#">traceroute fabric unicast-flow on page 5806</a></li> </ul>               |



## multicast-vlan-flood

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | multicast-vlan-flood                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit protocols oam fabric flow-specs <i>flow-specification-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | Configure parameters of the multicast VLAN flood protocol type in the internal fabric monitoring flow specification.                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | There are no configuration options.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Overview of Internal Fabric Monitoring on page 5451</a></li><li>• <a href="#">Configuring a Fabric Maintenance Association on page 5527</a></li><li>• <a href="#">Configuring Flow Specifications on page 5528</a></li><li>• <a href="#">fabric (OAM) on page 5599</a></li><li>• <a href="#">ping fabric multicast-flow on page 5757</a></li><li>• <a href="#">ping fabric unicast-flow on page 5759</a></li><li>• <a href="#">traceroute fabric unicast-flow on page 5806</a></li></ul> |



## unicast-ethernet

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>unicast-ethernet {     destination-mac <i>destination-mac-address</i> destination-mac-mask <i>destination-mac-mask</i>;     ethertype <i>ethertype</i>;     source-mac <i>source-mac-address</i> source-mac-mask <i>source-mac-mask</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit protocols oam fabric flow-specs <i>flow-specification-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | Configure unicast Ethernet parameters for a flow specification used in internal fabric monitoring.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                  | <p><b>destination-mac <i>destination-mac-address</i></b>—(Optional) MAC address of the destination fabric maintenance endpoint (FMEP) that is configured in the flow specification.</p> <p><b>destination-mac-mask <i>destination-mac-mask</i></b>—(Optional) MAC address range mask for the destination FMEP that is configured in the flow specification. You cannot configure the <b>destination-mac-mask</b> parameter unless you also configure the <b>destination-mac</b> parameter.</p> <p>The masked bits denote the range that needs to be generated. The other bits obtain their values from the corresponding source or destination MAC address parameter. The mask must be contiguous.</p> <p><b>Values:</b> Maximum of 6 contiguous masked bits, or a mask range of 64</p> <p><b>ethertype <i>ethertype</i></b>—Valid Ethernet type other than the IPv4 Ethertype.</p> <p><b>Values:</b> 2 bytes in decimal or hexadecimal notation</p> <p><b>source-mac <i>source-mac-address</i></b>—(Optional) MAC address of the source FMEP or interface that is configured in the flow specification.</p> <p><b>source-mac-mask <i>source-mac-mask</i></b>—(Optional) MAC address range mask for the source FMEP that is configured in the flow specification. You cannot configure the <b>source-mac-mask</b> parameter unless you also configure the <b>source-mac</b> parameter.</p> <p>The masked bits denote the range that needs to be generated. The other bits obtain their values from the corresponding source or destination MAC address parameter. The mask must be contiguous.</p> <p><b>Values:</b> Maximum of 6 contiguous masked bits, or a mask range of 64</p> |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Overview of Internal Fabric Monitoring on page 5451</a></li> <li>• <a href="#">Configuring a Fabric Maintenance Association on page 5527</a></li> <li>• <a href="#">Configuring Flow Specifications on page 5528</a></li> <li>• <a href="#">fabric (OAM) on page 5599</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |



- [ping fabric multicast-flow on page 5757](#)
- [ping fabric unicast-flow on page 5759](#)
- [traceroute fabric unicast-flow on page 5806](#)

---

## Configuration Statements for sFlow Technology

---

### agent-id

---

|                                 |                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>agent-id <i>ip-address</i>;</code>                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit protocols sflow]                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                      |
| <b>Description</b>              | Configure the IP address of the sFlow agent. If you do not configure the sFlow agent ID, the IP address for the agent is dynamically created using the IP address of an interface configured on the QFX Series device. |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring sFlow Technology on page 5532</a></li><li>• <a href="#">sflow on page 5614</a></li></ul>                                                               |

### collector

---

|                                 |                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>collector <i>ip-address</i> {<br/>    <i>udp-port</i> <i>port-number</i>;<br/>}</code>                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit protocols sflow]                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | <p>Configure a remote collector for sFlow network traffic monitoring. The device sends sFlow UDP datagrams to the configured collector for analysis. You can configure up to four collectors on the device. You specify the IP address for each collector you configure.</p> <p>The remaining statement is explained separately.</p> |
| <b>Options</b>                  | <i>ip-address</i> —IP address of the collector.                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring sFlow Technology on page 5532</a></li><li>• <a href="#">Example: Monitoring Network Traffic Using sFlow Technology on page 5514</a></li></ul>                                                                                                                        |



---

## interfaces (sFlow)

---

|                                 |                                                                                                                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>interfaces <i>interface-name</i> {<br/>    polling-interval <i>seconds</i>;<br/>    sample-rate <i>number</i>;<br/>}</code>                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit <a href="#">protocols sflow</a> ]                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                       |
| <b>Description</b>              | <p>Configure sFlow network traffic monitoring on the specified interface on the device. You can configure sFlow parameters (polling interval, sample rate) with different values on different interfaces.</p> <p>The remaining statements are explained separately.</p> |
| <b>Options</b>                  | <i>interface-name</i> —Name of the interface on which to configure sFlow parameters.                                                                                                                                                                                    |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring sFlow Technology on page 5532</a></li><li>• <a href="#">Example: Monitoring Network Traffic Using sFlow Technology on page 5514</a></li></ul>                                                           |



## polling-interval

---

|                                 |                                                                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>polling-interval <i>seconds</i>;</code>                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit <a href="#">protocols sflow</a> ],<br>[edit <a href="#">protocols sflow interfaces</a> <i>interface-name</i> ]                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                       |
| <b>Description</b>              | Configure the rate (in seconds) at which successive samples of interface statistics (counters) are taken.                                                                                                                                                                               |
| <b>Default</b>                  | If no polling interval is configured for a particular interface, the device uses the global polling interval configured at the <a href="#">[edit protocols sflow]</a> hierarchy level. If no global interval is configured, the device uses the default polling interval of 20 seconds. |
| <b>Options</b>                  | <b><i>seconds</i></b> —Number of seconds between successive samples of interface statistics.<br>Specifying a value of <b>0</b> (zero) disables the polling.<br><b>Range:</b> 0 through 3600 seconds                                                                                     |
| <b>Required Privilege Level</b> | <code>routing</code> —To view this statement in the configuration.<br><code>routing-control</code> —To add this statement to the configuration.                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring sFlow Technology on page 5532</a></li><li>• <a href="#">Example: Monitoring Network Traffic Using sFlow Technology on page 5514</a></li></ul>                                                                           |



## sample-rate

---

|                                 |                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>sample-rate <i>number</i>;</code>                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | <code>[edit protocols sflow],</code><br><code>[edit protocols sflow interfaces <i>interface-name</i>]</code>                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                        |
| <b>Description</b>              | Specify the denominator ( <i>number</i> ) of the ratio that is the sample rate in sFlow traffic monitoring. For example, to configure a sample rate of 1 in 1000 packets, you specify a <i>number</i> of 1000.                                                           |
| <b>Default</b>                  | If no sample rate is configured for a particular interface, the device uses the global sample rate configured at the <code>[edit protocols sflow]</code> hierarchy level. If no global rate is configured, the device uses the default sample rate of 1 in 2000 packets. |
| <b>Options</b>                  | <i>number</i> —Denominator of the ratio representing the sample rate (one packet out of <i>number</i> ).<br><b>Range:</b> 1 through 16,777,215                                                                                                                           |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring sFlow Technology on page 5532</a></li> <li>• <a href="#">Example: Monitoring Network Traffic Using sFlow Technology on page 5514</a></li> </ul>                                                         |



## sflow

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>sflow {<br/>  agent-id <i>ip-address</i>;<br/>  collector <i>ip-address</i> {<br/>    udp-port <i>port-number</i>;<br/>  }<br/>  interfaces <i>interface-name</i> {<br/>    polling-interval <i>number</i>;<br/>    sample-rate {<br/>      egress <i>number</i>;<br/>      ingress <i>number</i>;<br/>    }<br/>  }<br/>  polling-interval <i>number</i>;<br/>  sample-rate {<br/>    egress <i>number</i>;<br/>    ingress <i>number</i>;<br/>  }<br/>  source-ip <i>ip-address</i>;<br/>  traceoptions {<br/>    file <i>filename</i> &lt;files <i>number</i>&gt; &lt;no-stamp&gt; &lt;replace&gt; &lt;size <i>size</i>&gt; &lt;world-readable  <br/>      no-world-readable&gt;;<br/>    flag <i>flag</i>;<br/>  }<br/>}</pre> |
| <b>Hierarchy Level</b>          | [edit protocols]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | <p>Configure sFlow technology to monitor traffic continuously on specified interfaces simultaneously. sFlow data can be used to characterize network activity.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Default</b>                  | The sFlow protocol is disabled by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring sFlow Technology on page 5532</a></li><li>• <a href="#">Example: Monitoring Network Traffic Using sFlow Technology on page 5514</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |



---

## source-ip

---

|                                 |                                                                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>source-ip <i>ip-address</i>;</code>                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit protocols sflow]                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                            |
| <b>Description</b>              | Configure the source IP address to be used for sFlow datagrams. If you do not configure a source IP address, it is dynamically created based on the IP address of an Ethernet interface configured on the QFX Series device. |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring sFlow Technology on page 5532</a></li><li>• <a href="#">sflow on page 5614</a></li></ul>                                                                     |



## tracoptions (sFlow Technology)

---

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>tracoptions {<br/>    file <i>filename</i> &lt;files <i>number</i>&gt; &lt;no-stamp&gt; &lt;replace&gt; &lt;size <i>size</i>&gt; &lt;world-readable  <br/>    no-world-readable&gt;;<br/>    flag <i>flag</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>     | [edit protocols <a href="#">sflow</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b> | Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>         | Define tracing operations for sFlow technology.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Default</b>             | The <b>tracoptions</b> feature is disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>             | <p><b>file <i>filename</i></b>—Name of the file to receive the tracing operation output. Enclose the name in quotation marks. Output files are located in the <b>/var/log/</b> directory.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file named <b>trace-file</b> reaches its maximum size, it is renamed <b>trace-file.0</b>. Incoming trace file data is logged in the now empty <b>trace-file</b>. When <b>trace-file</b> again reaches its maximum size, <b>trace-file.0</b> is renamed <b>trace-file.1</b> and <b>trace-file</b> is renamed <b>trace-file.0</b>. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.</p> <p>If you specify the maximum number of files, you must also specify the maximum file size using the <b>size</b> option.</p> <p><b>Range:</b> 2 through 1000 files</p> <p><b>Default:</b> 1 trace file</p> <p><b>flag <i>flag</i></b>—Tracing operation to perform. To specify more than one tracing operation, include multiple <b>flag</b> statements.</p> <ul style="list-style-type: none"><li>• <b>all</b>—Trace all sFlow monitoring events.</li><li>• <b>client-server</b>—Trace sFlow monitoring client-server events.</li><li>• <b>configuration</b>—Trace sFlow monitoring configuration events.</li><li>• <b>interface</b>—Trace sFlow monitoring interface events.</li><li>• <b>rtsock</b>—Trace routing socket code events.</li></ul> <p><b>no-stamp</b>—(Optional) Do not place timestamp information at the beginning of each line in the trace file.</p> <p><b>no-world-readable</b>—(Optional) Prevent any user from reading the trace file.</p> <p><b>replace</b>—(Optional) Replace an existing trace file if there is one.</p> <p><b>size <i>size</i></b>—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named <b>trace-file</b> reaches its maximum size, it</p> |



is renamed **trace-file.0**. Incoming trace file data is logged in the now empty **trace-file**. When **trace-file** again reaches its maximum size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten. If you specify a maximum file size, you must also specify a maximum number of trace files with the **files** option.

**Syntax:** **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

**Range:** 10 KB through the maximum file size of 4 GB

**Default:** 128 KB

**world-readable**—(Optional) Allow any user to read the trace file.

**Required Privilege Level** routing and trace—To view this statement in the configuration.  
routing-control and trace-control—To add this statement to the configuration.

**Related Documentation**

- [Overview of sFlow Technology on page 5456](#)

## udp-port

**Syntax** `udp-port port-number;`

**Hierarchy Level** [edit protocols [sflow collector](#)]

**Release Information** Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Configure the UDP port for a remote collector for sFlow network traffic monitoring. The device sends sFlow UDP datagrams to the collector for analysis.

**Default** Port 6343

**Options** *port-number*—UDP port number for this collector.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring sFlow Technology on page 5532](#)
- [Example: Monitoring Network Traffic Using sFlow Technology on page 5514](#)



## Configuration Statements for SNMP

---

### access (SNMP)

---

**Syntax**

```
access {  
  group group-name {  
    (default-context-prefix | context-prefix context-prefix) {  
      security-model (any | usm | v1 | v2c) {  
        security-level (authentication | none | privacy) {  
          notify-view view-name;  
          read-view view-name;  
          write-view view-name;  
        }  
      }  
    }  
  }  
}
```

**Hierarchy Level** [edit snmp v3 vacm]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Set SNMP access limits.

The remaining statements are explained separately.

**Required Privilege Level** snmp—To view this statement in the configuration.  
snmp-control—To add this statement to the configuration.

### address (SNMP)

---

**Syntax** address *address*;

**Hierarchy Level** [edit snmp v3 target-address *target-address-name*]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Specify the SNMP target address for receiving traps or informs.

**Options** *address*—IPv4 address of the system to receive traps or informs. You must specify an address, not a hostname.

**Required Privilege Level** snmp—To view this statement in the configuration.  
snmp-control—To add this statement to the configuration.



## address-mask

---

|                                 |                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>address-mask <i>address-mask</i>;</code>                                                                                                                                                |
| <b>Hierarchy Level</b>          | <code>[edit snmp v3 target-address <i>target-address-name</i>]</code>                                                                                                                         |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 on the QFX Series. |
| <b>Description</b>              | Define and verify the source addresses for a group of target addresses for SNMP traps and informs.                                                                                            |
| <b>Options</b>                  | <b><i>address-mask</i></b> —Define a range of addresses.                                                                                                                                      |
| <b>Required Privilege Level</b> | <code>snmp</code> —To view this statement in the configuration.<br><code>snmp-control</code> —To add this statement to the configuration.                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring the Address Mask</li> </ul>                                                                                                                |

## agent-address

---

|                                 |                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>agent-address outgoing-interface;</code>                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | <code>[edit snmp trap-options]</code>                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Set the agent address of all SNMPv1 traps generated by this router or switch. Currently, the only option is <b>outgoing-interface</b> , which sets the agent address of each SNMPv1 trap to the address of the outgoing interface of that trap.                                                                                        |
| <b>Options</b>                  | <b>outgoing-interface</b> —Value of the agent address of all SNMPv1 traps generated by this router or switch. The <b>outgoing-interface</b> option sets the agent address of each SNMPv1 trap to the address of the outgoing interface of that trap.<br><b>Default:</b> Disabled (the agent address is not specified in SNMPv1 traps). |
| <b>Required Privilege Level</b> | <code>snmp</code> —To view this statement in the configuration.<br><code>snmp-control</code> —To add this statement to the configuration.                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring the Agent Address for SNMP Traps</li> </ul>                                                                                                                                                                                                                                         |



## alarm (SNMP RMON)

---

**Syntax**    alarm *index* {  
              description *description*;  
              falling-event-index *index*;  
              falling-threshold *integer*;  
              falling-threshold-interval *seconds*;  
              interval *seconds*;  
              request-type (get-next-request | get-request | walk-request);  
              rising-event-index *index*;  
              rising-threshold *integer*;  
              sample-type (absolute-value | delta-value);  
              startup-alarm (falling-alarm | rising-alarm | rising-or-falling alarm);  
              syslog-subtag *syslog-subtag*;  
              variable *oid-variable*;  
              }

**Hierarchy Level**    [edit snmp rmon]

**Release Information**    Statement introduced before Junos OS Release 7.4.  
                              Statement introduced in Junos OS Release 9.0 for EX Series switches.  
                              Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Configure RMON alarm entries.

**Options**    *index*—Identifies this alarm entry as an integer.  
  
              The remaining statements are explained separately.

**Required Privilege Level**    snmp—To view this statement in the configuration.  
                                  snmp-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring an Alarm Entry and Its Attributes](#)
- [event \(SNMP\)](#)
- [Configuring RMON Alarms and Events on page 5541](#)
- [RMON MIB Event, Alarm, Log, and History Control Tables on page 5472](#)
- [Monitoring RMON MIB Tables on page 5727](#)
- [Understanding RMON on page 5470](#)
- [Junos OS Network Management Configuration Guide](#)



## authentication-md5

|                            |                                                                                                                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | authentication-md5 {<br>authentication-password <i>authentication-password</i> ;<br>}                                                                                                          |
| <b>Hierarchy Level</b>     | [edit snmp v3 usm local-engine user <i>username</i> ],<br>[edit snmp v3 usm remote-engine <i>engine-id</i> user <i>username</i> ]                                                              |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>         | Configure MD5 as the authentication type for the SNMPv3 user.                                                                                                                                  |



**NOTE:** You can only configure one authentication type for each SNMPv3 user.

The remaining statement is explained separately.

|                                 |                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring MD5 Authentication</li> </ul>                              |



## authentication-none

---

|                            |                                                                                                                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | authentication-none;                                                                                                                                                                           |
| <b>Hierarchy Level</b>     | [edit snmp v3 usm local-engine user <i>username</i> ],<br>[edit snmp v3 usm remote-engine <i>engine-id</i> user <i>username</i> ]                                                              |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>         | Configure that there should be no authentication for the SNMPv3 user.                                                                                                                          |



.....

**NOTE:** You can configure only one authentication type for each SNMPv3 user.

.....

|                           |                                                          |
|---------------------------|----------------------------------------------------------|
| <b>Required Privilege</b> | snmp—To view this statement in the configuration.        |
| <b>Level</b>              | snmp-control—To add this statement to the configuration. |

|                              |                                                                               |
|------------------------------|-------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>Configuring No Authentication</li></ul> |
|------------------------------|-------------------------------------------------------------------------------|




## authentication-password

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>authentication-password <i>authentication-password</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit snmp v3 usm local-engine user <i>username</i> authentication-md5],<br>[edit snmp v3 usm local-engine user <i>username</i> authentication-sha],<br>[edit snmp v3 usm remote-engine <i>engine-id</i> user <i>username</i> authentication-md5],<br>[edit snmp v3 usm remote-engine <i>engine-id</i> user <i>username</i> authentication-sha]                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Configure the password for user authentication.                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <p><b><i>authentication-password</i></b>—Password that a user enters. The password is then converted into a key that is used for authentication.</p> <p>SNMPv3 has special requirements when you create plain-text passwords on a router or switch:</p> <ul style="list-style-type: none"> <li>• The password must be at least eight characters long.</li> <li>• The password can include alphabetic, numeric, and special characters, but it cannot include control characters.</li> </ul> |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• Configuring MD5 Authentication</li> <li>• Configuring SHA Authentication</li> </ul>                                                                                                                                                                                                                                                                                                                                                                |



## authentication-sha


---

|                                                                                                                                                                                |                                                                                                                                                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                  | <pre>authentication-sha {<br/>    authentication-password authentication-password;<br/>}</pre>                                                                                                 |
| <b>Hierarchy Level</b>                                                                                                                                                         | [edit snmp v3 usm local-engine user <i>username</i> ],<br>[edit snmp v3 usm remote-engine <i>engine-id</i> user <i>username</i> ]                                                              |
| <b>Release Information</b>                                                                                                                                                     | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>                                                                                                                                                             | Configure the secure hash algorithm (SHA) as the authentication type for the SNMPv3 user.                                                                                                      |
| <div> <b>NOTE:</b> You can configure only one authentication type for each SNMPv3 user.</div> |                                                                                                                                                                                                |
| The remaining statement is explained separately.                                                                                                                               |                                                                                                                                                                                                |
| <b>Required Privilege Level</b>                                                                                                                                                | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                  |
| <b>Related Documentation</b>                                                                                                                                                   | <ul style="list-style-type: none"><li>Configuring SHA Authentication</li></ul>                                                                                                                 |



## authorization

---

|                                 |                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>authorization <i>authorization</i>;</code>                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit snmp community <i>community-name</i> ]                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                         |
| <b>Description</b>              | Set the access authorization for SNMP <b>Get</b> , <b>GetBulk</b> , <b>GetNext</b> , and <b>Set</b> requests.                                                                                                                                                                                                                             |
| <b>Options</b>                  | <p><b><i>authorization</i></b>—Access authorization level:</p> <ul style="list-style-type: none"> <li><b>read-only</b>—Enable <b>Get</b>, <b>GetNext</b>, and <b>GetBulk</b> requests.</li> <li><b>read-write</b>—Enable all requests, including <b>Set</b> requests. You must configure a view to enable <b>Set</b> requests.</li> </ul> |
|                                 | <div>  <p><b>NOTE:</b> The <b>read-write</b> option is not supported on the QFX3000 QFabric system.</p> </div>                                                                                                                                           |
|                                 | <b>Default:</b> read-only                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">Configuring the SNMP Community String on page 5537</a></li> </ul>                                                                                                                                                                                                                      |



## bucket-size

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>bucket-size <i>number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | <code>[edit snmp rmon history <i>index</i>]</code>                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | Configure the sampling of Ethernet statistics for network fault diagnosis, planning, and performance tuning.                                                                                                                                                                                                                                                                                                          |
| <b>Default</b>                  | 50                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>                  | <i>number</i> —Number of discrete samples of Ethernet statistics requested.                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li><li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li><li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li><li>• <a href="#">Understanding RMON on page 5470</a></li><li>• <a href="#">Junos OS Network Management Configuration Guide</a></li></ul> |

## categories

---

|                                 |                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>categories {<br/>    <i>category</i>;<br/>}</code>                                                                                                                               |
| <b>Hierarchy Level</b>          | <code>[edit snmp trap-group <i>group-name</i>]</code>                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                      |
| <b>Description</b>              | Define the types of traps that are sent to the targets of the named trap group.                                                                                                        |
| <b>Default</b>                  | If you omit the <b>categories</b> statement, all trap types are included in trap notifications.                                                                                        |
| <b>Options</b>                  | <i>category</i> —Name of a trap type: <b>authentication</b> , <b>chassis</b> , <b>configuration</b> , <b>link</b> , <b>remote-operations</b> , <b>rmon-alarm</b> , or <b>startup</b> . |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring SNMP Trap Groups on page 5538</a></li></ul>                                                                            |



## client-list

---

|                                 |                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>client-list <i>client-list-name</i> {<br/>    <i>ip-addresses</i>;<br/>}</code>                                                               |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                                                         |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                   |
| <b>Description</b>              | Define a list of SNMP clients.                                                                                                                      |
| <b>Options</b>                  | <p><i>client-list-name</i>—Name of the client list.</p> <p><i>ip-addresses</i>—IP addresses of the SNMP clients to be added to the client list,</p> |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Adding a Group of Clients to an SNMP Community on page 5539</a></li> </ul>                     |

## client-list-name

---

|                                 |                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>client-list-name <i>client-list-name</i>;</code>                                                                          |
| <b>Hierarchy Level</b>          | [edit snmp community <i>community-name</i> ]                                                                                    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                               |
| <b>Description</b>              | Add a client list or prefix list to an SNMP community.                                                                          |
| <b>Options</b>                  | <i>client-list-name</i> —Name of the client list or prefix list.                                                                |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Adding a Group of Clients to an SNMP Community on page 5539</a></li> </ul> |



## clients

---

|                                 |                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>clients {<br/>    address &lt;restrict&gt;;<br/>}</pre>                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit snmp community <i>community-name</i> ]                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                               |
| <b>Description</b>              | Specify the IPv4 or IPv6 addresses of the SNMP client hosts that are authorized to use this community.                                                                                                                                                                                                          |
| <b>Default</b>                  | If you omit the <b>clients</b> statement, all SNMP clients using this community string are authorized to access the switch.                                                                                                                                                                                     |
| <b>Options</b>                  | <p><b>address</b>—Address of an SNMP client that is authorized to access this switch. You must specify an address, not a hostname. To specify more than one client, include multiple <b>address</b> options.</p> <p><b>restrict</b>—(Optional) Do not allow the specified SNMP client to access the switch.</p> |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring the SNMP Community String</li></ul>                                                                                                                                                                                                                           |


## commit-delay

---

|                                 |                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>commit-delay seconds;</pre>                                                                                                             |
| <b>Hierarchy Level</b>          | [edit snmp nonvolatile]                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                            |
| <b>Description</b>              | Configure the timer for the SNMP <b>Set</b> reply and start of the commit.                                                                   |
| <b>Options</b>                  | <p><b>seconds</b>—Delay between an affirmative SNMP <b>Set</b> reply and start of the commit operation.</p> <p><b>Default:</b> 5 seconds</p> |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring the Commit Delay Timer</li></ul>                                                           |



## community (SNMP)

|                                 |                                                                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>community <i>community-name</i> {   authorization <i>authorization</i>;   client-list-name <i>client-list-name</i>;   clients {     address restrict;   }   view <i>view-name</i>; }</pre>                                                                      |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                    |
| <b>Description</b>              | Define an SNMP community. An SNMP community authorizes SNMP clients based on the source IP address of incoming SNMP request packets. A community also defines which MIB objects are available and the operations (read-only or read-write) allowed on those objects. |
|                                 | <div>  <p><b>NOTE:</b> The <b>authorization read-write</b> option is not supported on the QFX3000 QFabric system.</p> </div>                                                        |
|                                 | <p>The SNMP client application specifies an SNMP community name in <b>Get</b>, <b>GetBulk</b>, <b>GetNext</b>, and <b>Set</b> SNMP requests.</p>                                                                                                                     |
| <b>Default</b>                  | If you omit the <b>community</b> statement, all SNMP requests are denied.                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b><i>community-name</i></b>—Community string. If the name includes spaces, enclose it in quotation marks (" ").</p> <p>The remaining statements are explained separately.</p>                                                                                    |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the SNMP Community String on page 5537</a></li> </ul>                                                                                                                                               |



## community (RMON)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>community <i>community-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit snmp rmon event <i>index</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | <p>Configure the SNMP trap group that is used when generating a trap (if the <b>eventType</b> object is configured to send traps). If that trap group has the <b>rmon-alarm</b> trap category configured, a trap is sent to all the targets configured for that trap group. The community string in the trap matches the name of the trap group (and hence, the value of <b>eventCommunity</b>). If nothing is configured, traps are sent to each group that has the <b>rmon-alarm</b> category configured.</p> <p>The event community is not the same as an SNMP community.</p> |
| <b>Options</b>                  | <b><i>community-name</i></b> —Name of the trap group that is used when generating a trap if the event is configured to send traps.                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | <b>snmp</b> —To view this statement in the configuration.<br><b>snmp-control</b> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li><li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li><li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li><li>• <a href="#">Understanding RMON on page 5470</a></li><li>• <a href="#">Junos OS Network Management Configuration Guide</a></li></ul>                                                                                                                                                            |



## community-name (SNMP)

|                            |                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>community-name <i>community-name</i>;</code>                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>     | <code>[edit snmp v3 snmp-community <i>community-index</i>]</code>                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11. for the QFX Series.                                                                                                                                                      |
| <b>Description</b>         | Define an SNMP community to authorize SNMPv1 or SNMPv2c clients in an SNMPv3 system. When you configure a community in SNMPv3, you can also specify a security name. The access privileges associated with the security name determine which MIB objects are available and which operations (read, write, or notify) are allowed on those objects. |
| <b>Options</b>             | <b><i>community-name</i></b> —Community string for an SNMPv1 or SNMPv2c community. If unconfigured, it is the same as the community index. If the name includes spaces, enclose the name in quotation marks (" ").                                                                                                                                 |



**NOTE:** Community names must be unique. You cannot configure the same community name at the `[edit snmp community]` and `[edit snmp v3 snmp-community community-index]` hierarchy levels.

The community name at the `[edit snmp v3 snmp-community community-index]` hierarchy level is encrypted and not displayed in the command-line interface (CLI).

|                                 |                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | <code>snmp</code> —To view this statement in the configuration.<br><code>snmp-control</code> —To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring the SNMPv3 Community</li> </ul>                                                        |



## contact

---

|                                 |                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>contact <i>contact</i>;</code>                                                                          |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                             |
| <b>Description</b>              | Define the value of the MIB II <b>sysContact</b> object, which is the contact person for the managed system.  |
| <b>Options</b>                  | <b>contact</b> —Name of the contact person. If the name includes spaces, enclose it in quotation marks (" "). |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring the System Contact on a Device Running Junos OS</li></ul>   |

## description (SNMP)

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>description <i>description</i>;</code>                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Define the value of the MIB II <b>sysDescription</b> object, which is the description of the system being managed.                                                                             |
| <b>Options</b>                  | <b>description</b> —System description. If the name includes spaces, enclose it in quotation marks (" ").                                                                                      |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring the System Description on a Device Running Junos OS</li></ul>                                                                                |



## description (RMON)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>description</code> <i>description</i> ;                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit snmp rmon alarm <i>index</i> ],<br>[edit snmp rmon event <i>index</i> ]                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Text description of alarm or event.                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <i>description</i> —Text description of an alarm or event entry. If the description includes spaces, enclose it in quotation marks (" ").                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li> <li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li> <li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li> <li>• <a href="#">Understanding RMON on page 5470</a></li> <li>• <a href="#">Junos OS Network Management Configuration Guide</a></li> </ul> |


## destination-port (SNMP)

---

|                                 |                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>destination-port</code> <i>port-number</i> ;                                                            |
| <b>Hierarchy Level</b>          | [edit snmp trap-group]                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                             |
| <b>Description</b>              | Assign a trap port number other than the default.                                                             |
| <b>Default</b>                  | If you omit this statement, the default port is 162.                                                          |
| <b>Options</b>                  | <i>port-number</i> —SNMP trap port number.                                                                    |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring SNMP Trap Groups on page 5538</a></li> </ul> |



## engine-id

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | engine-id {<br>(local <i>engine-id-suffix</i>   use-default-ip-address   use-mac-address);<br>}                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | <p>Define a unique identifier for an SNMPv3 engine by configuring the suffix of the engine ID. The engine ID is used for identification only and not for addressing. There are two parts of an engine ID: the prefix and the suffix. The prefix is formatted according to the specifications defined in RFC 3411, <i>An Architecture for Describing Simple Network Management Protocol (SNMP) Management Frameworks</i> and cannot be configured. The suffix is configured here.</p> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 10px;"> <p> <b>NOTE:</b> SNMPv3 authentication and encryption keys are generated based on the associated user passwords and the engine ID. If you configure or change the engine ID, you must commit the user passwords and new engine ID before you configure SNMPv3 users, or the authentication will fail.</p> <p>By default, the engine ID suffix is configured with the MAC address of the management interface (the <i>use-mac-address</i> option) on the QFX Series. You can override this configuration by using the local <i>engine-id-suffix</i> or <i>use-default-ip-address</i> option.</p> </div> |
| <b>Default</b>                  | use-mac-address                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>                  | <p><b>local <i>engine-id-suffix</i></b>—The engine ID suffix is set based on the data entered.</p> <p><b>use-default-ip-address</b>—The engine ID suffix is generated from the default IP address.</p> <p><b>use-mac-address</b>—The engine ID suffix is generated from the MAC address of the management interface on the switch.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |



## event

---

|                                 |                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>event <i>index</i> {     community <i>community-name</i>;     description <i>description</i>;     type (RMON Notification) <i>type</i>; }</pre>                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit snmp rmon]                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Configure RMON event entries.                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>                  | <p><i>index</i>—Identifier for a specific event entry.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li> <li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li> <li>• <a href="#">Understanding RMON on page 5470</a></li> <li>• <a href="#">Junos OS Network Management Configuration Guide</a></li> </ul> |



## falling-event-index (RMON)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>falling-event-index <i>index</i>;</code>                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | <code>[edit snmp rmon alarm <i>index</i>]</code>                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | Set the index number of the event entry that is used when a falling threshold is crossed. You specify the falling-event index when you configure an SNMP RMON alarm. If this value is zero, no event is triggered.                                                                                                                                                                                                    |
| <b>Options</b>                  | <i>index</i> —Index of the event entry that is used when a falling threshold is crossed.<br><b>Range:</b> 0 through 65,535<br><b>Default:</b> 0                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | <code>snmp</code> —To view this statement in the configuration.<br><code>snmp-control</code> —To add this statement to the configuration.                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li><li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li><li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li><li>• <a href="#">Understanding RMON on page 5470</a></li><li>• <a href="#">Junos OS Network Management Configuration Guide</a></li></ul> |



---

## falling-threshold (Health Monitor)

---

|                                 |                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>falling-threshold <i>percentage</i>;</code>                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit snmp health-monitor]                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                      |
| <b>Description</b>              | Set the lower threshold for the monitored object when you configure a health monitor alarm. By setting a rising and a falling threshold for a monitored variable, you can be alerted whenever the value of the variable falls outside the allowable operational range. |
| <b>Options</b>                  | <p><b><i>percentage</i></b>—Lower threshold for the alarm entry.</p> <p><b>Range:</b> 1 through 100</p> <p><b>Default:</b> 70 percent of the maximum possible value</p>                                                                                                |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">rising-threshold on page 1322</a></li><li>• <a href="#">Configuring Health Monitoring on page 5544</a></li></ul>                                                                                                   |



## falling-threshold (RMON)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>falling-threshold <i>integer</i>;</code>                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | <code>[edit snmp rmon alarm <i>index</i>]</code>                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | Set the lower threshold for the sampled variable (monitored object) when you configure an SNMP RMON alarm. By setting a rising and a falling threshold for a variable, you can be alerted whenever the value of the variable falls outside the allowable operational range.                                                                                                                                           |
| <b>Options</b>                  | <p><i>integer</i>—Lower threshold for the alarm entry.</p> <p><b>Range:</b> -2,147,483,648 through 2,147,483,647</p> <p><b>Default:</b> 20 percent less than the <b>rising-threshold</b> value</p>                                                                                                                                                                                                                    |
| <b>Required Privilege Level</b> | <p><code>snmp</code>—To view this statement in the configuration.</p> <p><code>snmp-control</code>—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li><li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li><li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li><li>• <a href="#">Understanding RMON on page 5470</a></li><li>• <a href="#">Junos OS Network Management Configuration Guide</a></li></ul> |



## falling-threshold-interval

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>falling-threshold-interval <i>seconds</i>;</code>                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | <code>[edit snmp rmon alarm <i>index</i>]</code>                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Set the interval between samples after the rising threshold is exceeded and the value of the sample starts to drop. If the value of the sample drops and exceeds the falling threshold, the regular sampling interval is used.                                                                                                                                                                                              |
| <b>Options</b>                  | <p><i>interval</i>—Time between samples, in seconds.</p> <p><b>Range:</b> 1 through 2,147,483,647 seconds</p> <p><b>Default:</b> 60 seconds</p>                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li> <li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li> <li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li> <li>• <a href="#">Understanding RMON on page 5470</a></li> <li>• <a href="#">Junos OS Network Management Configuration Guide</a></li> </ul> |

## filter-duplicates

---

|                                 |                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>filter-duplicates;</code>                                                                                          |
| <b>Hierarchy Level</b>          | <code>[edit snmp]</code>                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                        |
| <b>Description</b>              | Filter duplicate <b>Get</b> , <b>GetNext</b> , or <b>GetBulk</b> SNMP requests.                                          |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p> |



## filter-interfaces

---

|                                 |                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>filter-interfaces {<br/>    all-internal-interfaces;<br/>    interfaces <i>interface</i><br/>}</pre>                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                   |
| <b>Description</b>              | Filter out information related to specific interfaces from the output of SNMP <b>Get</b> and <b>GetNext</b> requests performed on interface-related MIBs.                                                                                                           |
| <b>Options</b>                  | <b>all-internal-interfaces</b> —Filter out information from SNMP <b>Get</b> and <b>GetNext</b> requests for all internal interfaces.<br><br><b>interfaces</b> —Filter out information from SNMP <b>Get</b> and <b>GetNext</b> requests for the specified interface. |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Filtering Interface Information Out of SNMP Get and GetNext Output</li></ul>                                                                                                                                                  |

## group (Associating a Security Name)

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>group <i>group-name</i>;</pre>                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit snmp v3 vacm security-to-group security-model (usm   v1   v2c)<br><i>security-name</i> <i>security-name</i> ]                                                                            |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Associate a security name with a group composed of users with the same access privileges. The security name is used during authentication of SNMP messages, and is mapped to a username.       |
| <b>Options</b>                  | <b>group-name</b> —Collection of SNMP security names that share the same SNMPv3 access privileges.                                                                                             |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring the Group</li></ul>                                                                                                                          |



## group (Configuring Access Privileges)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> group <i>group-name</i> {   (default-context-prefix   context-prefix <i>context-prefix</i>){     security-model (any   usm   v1   v2c) {       security-level (authentication   none   privacy) {         notify-view <i>view-name</i>;         read-view <i>view-name</i>;         write-view <i>view-name</i>;       }     }   } } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit snmp v3 vacm access]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Assign the security name to a group, and specify the SNMPv3 context applicable to the group. The <b>default-context-prefix</b> statement, when included, adds all the contexts configured on the device to the group, whereas the <b>context-prefix <i>context-prefix</i></b> statement enables you to specify a context and to add that particular context to the group.</p> <p>(Not applicable to the QFX Series.) When the context prefix is specified as default (for example, <b>context-prefix default</b>), the context associated with the master routing instance is added to the group. To specify a routing instance that is part of a logical system, specify it as <b>logical system/routing instance</b>. For example, to specify routing instance <i>ri1</i> in logical system <i>ls1</i>, include <b>context-prefix ls1/ri1</b>.</p> <p>The remaining statements under this hierarchy are explained separately.</p> |
| <b>Options</b>                  | <b><i>group-name</i></b> —SNMPv3 group name created for the SNMPv3 group.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring the Group</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |



## health-monitor

---

|                                 |                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>health-monitor {<br/>    falling-threshold <i>percentage</i>;<br/>    interval <i>seconds</i>;<br/>    rising-threshold <i>percentage</i>;<br/>}</pre>                         |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                                                                                         |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                   |
| <b>Description</b>              | <p>Configure health monitoring.</p> <p>The remaining statements are explained separately.</p>                                                                                       |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Health Monitoring on page 5544</a></li><li>• <a href="#">Understanding Health Monitoring on page 5474</a></li></ul> |



## history

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>history <i>history-index</i> {     bucket-size <i>number</i>;     interface <i>interface-name</i>;     interval <i>seconds</i>;     owner <i>owner-name</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit snmp rmon]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | <p>Configure RMON history group entries. This RMON feature can be used with the Simple Network Management Protocol (SNMP) agent on the network to monitor all the traffic flowing among devices on all connected LAN segments. The RMON history feature collects statistics in accordance with user-configurable parameters.</p> <p>The history group controls the periodic statistical sampling of data from various types of networks. This group contains configuration entries that specify an interface, polling period, and other parameters. If you use the <b>history</b> statement, you must also configure the <b>interface <i>interface-name</i></b> statement.</p> |
| <b>Options</b>                  | <p><b>history-index</b>—Provide a number for this history entry.</p> <p><b>Range:</b> 1 through 65535</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li> <li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li> <li>• <a href="#">Understanding RMON on page 5470</a></li> <li>• <a href="#">Junos OS Network Management Configuration Guide</a></li> </ul>                                                                                                                                                                                                                                                                                                                               |



## interface (SNMP)

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>interface [ <i>interface-names</i> ];</code>                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Configure the interfaces on which SNMP requests can be accepted.                                                                                                                               |
| <b>Default</b>                  | If you omit this statement, SNMP requests entering the router or switch through any interface are accepted.                                                                                    |
| <b>Options</b>                  | <i>interface-names</i> —Names of one or more logical interfaces.                                                                                                                               |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Interfaces on Which SNMP Requests Can Be Accepted on page 5540</a></li></ul>                                               |



## interface (RMON)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>interface <i>interface-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | <code>[edit snmp rmon history <i>history-index</i>]</code>                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | <p>Specify the interface to be monitored in the specified RMON history entry.</p> <p>Only one interface can be specified for a particular RMON history index. There is a one-to-one relationship between the interface and the history index. The interface must be specified in order for the RMON history to be created.</p>                                                                                              |
| <b>Options</b>                  | <i>interface-name</i> —Specify the interface to be monitored within the specified entry of the RMON history of Ethernet statistics.                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li> <li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li> <li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li> <li>• <a href="#">Understanding RMON on page 5470</a></li> <li>• <a href="#">Junos OS Network Management Configuration Guide</a></li> </ul> |

## interval (Health Monitor)

---

|                                 |                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>interval <i>seconds</i>;</code>                                                                                                        |
| <b>Hierarchy Level</b>          | <code>[edit snmp health-monitor]</code>                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                            |
| <b>Description</b>              | Configure the interval between sampling of the object being monitored by the health monitor.                                                 |
| <b>Options</b>                  | <p><i>seconds</i>—Time between samples, in seconds.</p> <p><b>Range:</b> 1 through 2147483647 seconds</p> <p><b>Default:</b> 300 seconds</p> |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Health Monitoring on page 5544</a></li> </ul>                               |



## interval (RMON)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>interval <i>seconds</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit snmp rmon alarm <i>index</i> ],<br>[edit snmp rmon history <i>index</i> ]                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | Configure the interval over which data is to be sampled for the specified alarm or interface.                                                                                                                                                                                                                                                                                                                         |
| <b>Default</b>                  | 60 sec for alarm sampling.<br><br>1800 sec for history sampling.                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <i>seconds</i> —Interval at which data is to be sampled for the specified alarm or interface.                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li><li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li><li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li><li>• <a href="#">Understanding RMON on page 5470</a></li><li>• <a href="#">Junos OS Network Management Configuration Guide</a></li></ul> |



## local-engine

**Syntax**

```

local-engine {
  user username {
    authentication-md5 {
      authentication-password authentication-password;
    }
    authentication-none;
    authentication-sha {
      authentication-password authentication-password;
    }
    privacy-aes128 {
      privacy-password privacy-password;
    }
    privacy-des {
      privacy-password privacy-password;
    }
    privacy-3des {
      privacy-password privacy-password;
    }
    privacy-none {
      privacy-password privacy-password;
    }
  }
}

```

**Hierarchy Level** [edit snmp v3 [usm](#)]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure local engine information for the user-based security model (USM).  
  
The remaining statements are explained separately.

**Required Privilege Level** snmp—To view this statement in the configuration.  
snmp-control—To add this statement to the configuration.

**Related Documentation**

- [Creating SNMPv3 Users on page 5544](#)



## location

---

|                                 |                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>location <i>location</i>;</code>                                                                                                    |
| <b>Hierarchy Level</b>          | <code>[edit snmp]</code>                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                         |
| <b>Description</b>              | Define the value of the MIB II <b>sysLocation</b> object, which is the physical location of the managed system.                           |
| <b>Options</b>                  | <b>location</b> —Location of the local system. You must enclose the name within quotation marks (" ").                                    |
| <b>Required Privilege Level</b> | <code>snmp</code> —To view this statement in the configuration.<br><code>snmp-control</code> —To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring the System Location for a Device Running Junos OS</li></ul>                             |

## message-processing-model

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>message-processing-model (v1   v2c   v3);</code>                                                                                                                                         |
| <b>Hierarchy Level</b>          | <code>[edit snmp v3 target-parameters <i>target-parameter-name</i> parameters]</code>                                                                                                          |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Configure the message processing model to be used when generating SNMP notifications.                                                                                                          |
| <b>Options</b>                  | <b>v1</b> —SNMPv1 message process model.<br><b>v2c</b> —SNMPv2c message process model.<br><b>v3</b> —SNMPv3 message process model.                                                             |
| <b>Required Privilege Level</b> | <code>snmp</code> —To view this statement in the configuration.<br><code>snmp-control</code> —To add this statement to the configuration.                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring the Message Processing Model</li></ul>                                                                                                       |



## name

---

|                                 |                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>name <i>name</i>;</code>                                                                                |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                             |
| <b>Description</b>              | Set the system name from the command-line interface.                                                          |
| <b>Options</b>                  | <i>name</i> —System name override.                                                                            |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring the System Name</li> </ul>                                 |

## nonvolatile

---

|                                 |                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>nonvolatile {   <i>commit-delay seconds</i>; }</pre>                                                     |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                             |
| <b>Description</b>              | <p>Configure options for SNMP <b>Set</b> requests.</p> <p>The statement is explained separately.</p>          |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring the Commit Delay Timer</li> <li>commit-delay</li> </ul>    |



## notify

---

|                                 |                                                                                                                                                                                                                                                                                                            |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>notify <i>name</i> {<br/>    tag <i>tag-name</i>;<br/>    type (trap   inform);<br/>}</pre>                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit snmp v3]                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p><b>type inform</b> option added in Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>                              |
| <b>Description</b>              | Select management targets for SNMPv3 notifications as well as the type of notifications. Notifications can be either traps or informs.                                                                                                                                                                     |
| <b>Options</b>                  | <p><b><i>name</i></b>—Name assigned to the notification.</p> <p><b><i>tag-name</i></b>—Notifications are sent to all targets configured with this tag.</p> <p><b>type</b>—Notification type is <b>trap</b> or <b>inform</b>. Traps are unconfirmed notifications. Informs are confirmed notifications.</p> |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Configuring the Inform Notification Type and Target Address</li><li>• Configuring the SNMPv3 Trap Notification</li></ul>                                                                                                                                           |



## notify-filter (Applying to the Management Target)

|                                 |                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>notify-filter <i>profile-name</i>;</code>                                                                                                                                                          |
| <b>Hierarchy Level</b>          | <code>[edit snmp v3 <b>target-parameters</b> <i>target-parameters-name</i>]</code>                                                                                                                       |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.           |
| <b>Description</b>              | Configure the notify filter applied to a specific set of SNMPv3 target parameters. Target parameters are the message processing and security parameters for notifications sent to a target SNMP manager. |
| <b>Options</b>                  | <b><i>profile-name</i></b> —Name of the notify filter to apply to notifications.                                                                                                                         |
| <b>Required Privilege Level</b> | <code>snmp</code> —To view this statement in the configuration.<br><code>snmp-control</code> —To add this statement to the configuration.                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Applying the Trap Notification Filter</li> </ul>                                                                                                                  |

## notify-filter (Configuring the Profile Name)

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>notify-filter <i>profile-name</i> {<br/>oid <i>oid</i> (include   exclude);<br/>}</code>                                                                                                 |
| <b>Hierarchy Level</b>          | <code>[edit snmp v3]</code>                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Specify a group of MIB objects for which you define access. The notify filter limits the type of traps or informs sent to the network management system.                                       |
| <b>Options</b>                  | <b><i>profile-name</i></b> —Name assigned to the notify filter.<br><br>The remaining statement is explained separately.                                                                        |
| <b>Required Privilege Level</b> | <code>snmp</code> —To view this statement in the configuration.<br><code>snmp-control</code> —To add this statement to the configuration.                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring the Trap Notification Filter</li> <li>oid (SNMP)</li> </ul>                                                                                 |



## notify-view

---

|                                 |                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>notify-view view-name;</code>                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | <code>[edit snmp v3 vacm access group group-name (default-context-prefix   context-prefix context-prefix) security-model (any   usm   v1   v2c) security-level (authentication   none   privacy)]</code> |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.           |
| <b>Description</b>              | Associate the notify view with a community (for SNMPv1 or SNMPv2c clients) or a group name (for SNMPv3 clients).                                                                                         |
| <b>Options</b>                  | <b>view-name</b> —Name of the view to which the SNMP user group has access.                                                                                                                              |
| <b>Required Privilege Level</b> | <b>snmp</b> —To view this statement in the configuration.<br><b>snmp-control</b> —To add this statement to the configuration.                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring MIB Views on page 5541</a></li><li>• Configuring the Notify View</li></ul>                                                               |

## oid

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>oid object-identifier (exclude  include);</code>                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | <code>[edit snmp view view-name]</code>                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>              | Specify an object identifier (OID) used to represent a subtree of MIB objects.                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <b>exclude</b> —Exclude the subtree of MIB objects represented by the specified OID.<br><br><b>include</b> —Include the subtree of MIB objects represented by the specified OID.<br><br><b>object-identifier</b> —OID used to represent a subtree of MIB objects. All MIB objects represented by this statement have the specified OID as a prefix. You can specify the OID using either a sequence of dotted integers or a subtree name. |
| <b>Required Privilege Level</b> | <b>snmp</b> —To view this statement in the configuration.<br><b>snmp-control</b> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring MIB Views on page 5541</a></li></ul>                                                                                                                                                                                                                                                                                                                                      |



## oid (SNMPv3)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>oid <i>oid</i> (include   exclude);</code>                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | <code>[edit snmp v3 notify-filter <i>profile-name</i>]</code>                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Specify an object identifier (OID) used to represent a subtree of MIB objects. This OID is a prefix that the represented MIB objects have in common.                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <p><b>exclude</b>—Exclude the subtree of MIB objects represented by the specified OID.</p> <p><b>include</b>—Include the subtree of MIB objects represented by the specified OID.</p> <p><b>oid</b>—Object identifier used to represent a subtree of MIB objects. All MIB objects represented by this statement have the specified OID as a prefix. You can specify the OID using either a sequence of dotted integers or a subtree name.</p> |
| <b>Required Privilege Level</b> | <p><code>snmp</code>—To view this statement in the configuration.</p> <p><code>snmp-control</code>—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                            |

## owner

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>owner <i>owner-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | <code>[edit snmp rmon history <i>index</i>]</code>                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Specify the user or group responsible for this RMON history configuration.                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                  | <p><b>owner-name</b>—User or group responsible for this configuration.</p> <p><b>Range:</b> 0 through 32 alphanumeric characters</p>                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | <p><code>snmp</code>—To view this statement in the configuration.</p> <p><code>snmp-control</code>—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li> <li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li> <li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li> <li>• <a href="#">Understanding RMON on page 5470</a></li> <li>• <a href="#">Junos OS Network Management Configuration Guide</a></li> </ul> |



## parameters

---

|                                 |                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>parameters {<br/>  message-processing-model (v1   v2c   v3);<br/>  security-level (none   authentication   privacy);<br/>  security-model (usm   v1   v2c);<br/>  security-name security-name;<br/>}</pre> |
| <b>Hierarchy Level</b>          | [edit snmp v3 target-parameters <i>target-parameters-name</i> ]                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                  |
| <b>Description</b>              | Configure a set of target parameters for message processing and security.<br><br>The remaining statements are explained separately.                                                                             |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Defining and Configuring the Trap Target Parameters</li></ul>                                                                                                             |

## port (SNMP)

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>port port-number;</pre>                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit snmp v3 target-address <i>target-address-name</i> ]                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Configure a UDP port number for an SNMP target.                                                                                                                                                |
| <b>Default</b>                  | If you omit this statement, the default port is 162.                                                                                                                                           |
| <b>Options</b>                  | <i>port-number</i> —Port number for the SNMP target.                                                                                                                                           |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring the Port</li></ul>                                                                                                                           |



## privacy-3des

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>privacy-3des {   <b>privacy-password</b> <i>privacy-password</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | <pre>[edit snmp v3 usm local-engine user <i>username</i>], [edit snmp v3 usm remote-engine <i>engine-id</i> user <i>username</i>]</pre>                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | <p>Configure the triple Data Encryption Standard (3DES) as the privacy type for the SNMPv3 user.</p>                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <p><b>privacy-password</b> <i>privacy-password</i>—Password that a user enters. The password is then converted into a key that is used for encryption.</p> <p>SNMPv3 has special requirements when you create plain-text passwords on a router or switch:</p> <ul style="list-style-type: none"> <li>• The password must be at least eight characters long.</li> <li>• The password can include alphabetic, numeric, and special characters, but it cannot include control characters.</li> </ul> |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• Configuring the Encryption Type</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                               |



## privacy-aes128

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>privacy-aes128 {<br/>    <b>privacy-password</b> <i>privacy-password</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit snmp v3 usm local-engine user <i>username</i> ],<br>[edit snmp v3 usm remote-engine <i>engine-id</i> user <i>username</i> ]                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | Configure the Advanced Encryption Standard encryption algorithm (CFB128-AES-128 Privacy Protocol) for the SNMPv3 user.                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <p><b>privacy-password</b> <i>privacy-password</i>—Password that a user enters. The password is then converted into a key that is used for encryption.</p> <p>SNMPv3 has special requirements when you create plain-text passwords on a router or switch:</p> <ul style="list-style-type: none"><li>• The password must be at least eight characters long.</li><li>• The password can include alphabetic, numeric, and special characters, but it cannot include control characters.</li></ul> |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Configuring the Encryption Type</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                              |



## privacy-des

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>privacy-des {<br/>    privacy-password <i>privacy-password</i>;<br/>}</code>                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit snmp v3 usm local-engine user <i>username</i> ],<br>[edit snmp v3 usm remote-engine <i>engine-id</i> user <i>username</i> ]                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | Configure the Data Encryption Standard (DES) as the privacy type for the SNMPv3 user.                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <p><b>privacy-password <i>privacy-password</i></b>—Password that a user enters. The password is then converted into a key that is used for encryption.</p> <p>SNMPv3 has special requirements when you create plain-text passwords on a router or switch:</p> <ul style="list-style-type: none"> <li>• The password must be at least eight characters long.</li> <li>• The password can include alphabetic, numeric, and special characters, but it cannot include control characters.</li> </ul> |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• Configuring the Encryption Type</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                               |

## privacy-none

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>privacy-none;</code>                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit snmp v3 usm local-engine user <i>username</i> ],<br>[edit snmp v3 usm remote-engine <i>engine-id</i> user <i>username</i> ]                                                              |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Configure that no encryption be used for the SNMPv3 user.                                                                                                                                      |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• Configuring the Encryption Type</li> </ul>                                                                                                            |



## privacy-password

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>privacy-password <i>privacy-password</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit snmp v3 usm local-engine user <i>username</i> privacy-3des],<br>[edit snmp v3 usm local-engine user <i>username</i> privacy-aes128],<br>[edit snmp v3 usm local-engine user <i>username</i> privacy-des],<br>[edit snmp v3 usm remote-engine <i>engine-id</i> user <i>username</i> privacy-3des],<br>[edit snmp v3 usm remote-engine <i>engine-id</i> user <i>username</i> privacy-aes128],<br>[edit snmp v3 usm remote-engine <i>engine-id</i> user <i>username</i> privacy-des] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Configure a privacy password for the SNMPv3 user.                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <p><b><i>privacy-password</i></b>—Password that a user enters. The password is then converted into a key that is used for encryption.</p> <p>SNMPv3 has special requirements when you create plain-text passwords on a router or switch:</p> <ul style="list-style-type: none"><li>• The password must be at least eight characters long.</li><li>• The password can include alphabetic, numeric, and special characters, but it cannot include control characters.</li></ul>           |
| <b>Required Privilege Level</b> | <code>snmp</code> —To view this statement in the configuration.<br><code>snmp-control</code> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Configuring the Encryption Type</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                       |



## read-view

---

|                                 |                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>read-view <i>view-name</i>;</code>                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [ <code>edit snmp v3 vacm access group <i>group-name</i> (default-context-prefix   context-prefix <i>context-prefix</i>) security-model (any   usm   v1   v2c) security-level (authentication   none   privacy)</code> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                           |
| <b>Description</b>              | Associate the read-only view with a community (for SNMPv1 or SNMPv2c clients) or a group name (for SNMPv3 clients).                                                                                                      |
| <b>Options</b>                  | <b><i>view-name</i></b> —The name of the view to which the SNMP user group has access.                                                                                                                                   |
| <b>Required Privilege Level</b> | <code>snmp</code> —To view this statement in the configuration.<br><code>snmp-control</code> —To add this statement to the configuration.                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring the Read View</li> <li><a href="#">Configuring MIB Views on page 5541</a></li> </ul>                                                                                  |



## remote-engine

---

**Syntax**    `remote-engine engine-id {  
                  user username {  
                    authentication-md5 {  
                      authentication-password authentication-password;  
                    }  
                    authentication-none;  
                    authentication-sha {  
                      authentication-password authentication-password;  
                    }  
                    privacy-aes128 {  
                      privacy-password privacy-password;  
                    }  
                    privacy-des {  
                      privacy-password privacy-password;  
                    }  
                    privacy-3des {  
                      privacy-password privacy-password;  
                    }  
                    privacy-none {  
                      privacy-password privacy-password;  
                    }  
                  }  
                }`

**Hierarchy Level**    [edit snmp v3 usm]

**Release Information**    Statement introduced in Junos OS Release 7.4.  
                              Statement introduced in Junos OS Release 9.0 for EX Series switches.  
                              Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Configure the remote engine information for the user-based security model (USM). To send inform messages to an SNMPv3 user on a remote device, you must configure the engine identifier for the SNMP agent on the remote device where the user resides.

**Options**    *engine-id*—Engine identifier. Used to compute the security digest for authenticating and encrypting packets sent to a user on the remote host.

The remaining statements are explained separately.

**Required Privilege Level**    snmp—To view this statement in the configuration.  
                                  snmp-control—To add this statement to the configuration.

**Related Documentation**    • Configuring the Remote Engine and Remote User



## request-type

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>request-type (get-next-request   get-request   walk-request);</code>                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | <code>[edit snmp rmon alarm <i>index</i>]</code>                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Extend monitoring to a specific SNMP object instance ( <b>get-request</b> ), to all object instances belonging to a MIB branch ( <b>walk-request</b> ), or to the next object instance after the instance specified in the configuration ( <b>get-next-request</b> ).                                                                                                                                                       |
| <b>Default</b>                  | <b>walk-request</b>                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <p><b>get-next-request</b>—Perform an SNMP get next request.</p> <p><b>get-request</b>—Perform an SNMP get request.</p> <p><b>walk-request</b>—Perform an SNMP walk request.</p>                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | <p><b>snmp</b>—To view this statement in the configuration.</p> <p><b>snmp-control</b>—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li> <li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li> <li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li> <li>• <a href="#">Understanding RMON on page 5470</a></li> <li>• <a href="#">Junos OS Network Management Configuration Guide</a></li> </ul> |



## retry-count (SNMPv3)

---

|                                 |                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | retry-count <i>number</i> ;                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit snmp v3 target-address <i>target-address-name</i> ]                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                  |
| <b>Description</b>              | Configure the retry count for SNMP informs.                                                                                                                                                                                                                         |
| <b>Options</b>                  | <b><i>number</i></b> —Maximum number of times the inform is transmitted if no acknowledgment is received. If no acknowledgment is received after the inform is transmitted the maximum number of times, the inform message is discarded.<br><b>Default:</b> 3 times |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring SNMP Informs on page 5549</a></li><li>• timeout</li></ul>                                                                                                                                           |



---

## rising-event-index

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>rising-event-index <i>index</i>;</code>                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit <a href="#">snmp rmon alarm index</a> ]                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | Set the index of the event entry that is used when a rising alarm threshold is exceeded. The rising-event index is specified when you configure an SNMP RMON alarm. If this value is zero, no event is triggered.                                                                                                                                                                                                     |
| <b>Options</b>                  | <b><i>index</i></b> —Index of the event entry that is used when a rising threshold is exceeded.<br><b>Range:</b> 0 through 65,535<br><b>Default:</b> 0                                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | <b>snmp</b> —To view this statement in the configuration.<br><b>snmp-control</b> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li><li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li><li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li><li>• <a href="#">Understanding RMON on page 5470</a></li><li>• <a href="#">Junos OS Network Management Configuration Guide</a></li></ul> |



## rising-threshold (Health Monitor)

---

|                                 |                                                                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | rising-threshold <i>percentage</i> ;                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit snmp health-monitor]                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                    |
| <b>Description</b>              | Set the upper threshold for the monitored object when you configure a health monitor alarm. By setting a rising and a falling threshold for a monitored object, you can be alerted whenever the value of the variable falls outside the allowable operational range. |
| <b>Options</b>                  | <p><i>percentage</i>—Upper threshold for the alarm entry.</p> <p><b>Range:</b> 1 through 100</p> <p><b>Default:</b> 80 percent of the maximum possible value</p>                                                                                                     |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Health Monitoring on page 5544</a></li><li>• <a href="#">falling-threshold on page 1287</a></li></ul>                                                                                                |



---

## rising-threshold (RMON)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>rising-threshold <i>integer</i>;</code>                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | <code>[edit snmp rmon alarm <i>index</i>]</code>                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | Set the upper threshold for the sampled variable (monitored object) when you configure an SNMP RMON alarm. By setting a rising and a falling threshold for a variable, you can be alerted whenever the value of the variable falls outside the allowable operational range.                                                                                                                                           |
| <b>Options</b>                  | <b><i>integer</i></b> —Upper threshold for the alarm entry.<br><b>Range:</b> -2,147,483,648 through 2,147,483,647                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | <b>snmp</b> —To view this statement in the configuration.<br><b>snmp-control</b> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li><li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li><li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li><li>• <a href="#">Understanding RMON on page 5470</a></li><li>• <a href="#">Junos OS Network Management Configuration Guide</a></li></ul> |



## rmon

```
Syntax  rmon {
        alarm index {
            description description;
            falling-event-index index;
            falling-threshold integer;
            falling-threshold-interval seconds;
            interval seconds;
            request-type;
            rising-event-index index;
            rising-threshold integer;
            sample-type (absolute-value | delta-value);
            startup-alarm (falling-alarm | rising-alarm | rising-or-falling alarm);
            syslog-subtag syslog-subtag;
            variable oid-variable;
        }
        event index {
            community community-name;
            description description;
            type (RMON Notification) type;
        }
        history history-index {
            bucket-size number;
            interface interface-name;
            interval seconds;
            owner owner-name;
        }
    }
```

**Hierarchy Level** [edit snmp]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Provide comprehensive network fault diagnosis, planning, and performance tuning information. RMON delivers this information in nine groups of monitoring elements, each providing specific sets of data to meet common network monitoring requirements. Each group is optional, so that vendors do not need to support all the groups within the MIB.

Junos OS supports the RMON statistics, history, alarm, and event groups.

The remaining statements are explained separately.

**Default** Disabled.

**Required Privilege Level** snmp—To view this statement in the configuration.  
snmp-control—To add this statement to the configuration.

**Related Documentation**

- [RMON MIB Event, Alarm, Log, and History Control Tables on page 5472](#)
- [Monitoring RMON MIB Tables on page 5727](#)
- [Understanding RMON on page 5470](#)



- [Junos OS Network Management Configuration Guide](#)

## sample-type

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>sample-type (absolute-value   delta-value);</code>                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | <code>[edit snmp rmon alarm <i>index</i>]</code>                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Configure the method of sampling the selected variable (monitored object). When you configure an SNMP RMON alarm, you can specify the sample type.                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <p><b>absolute-value</b>—Actual value of the selected variable is used when comparing against the thresholds.</p> <p><b>delta-value</b>—Difference between samples of the selected variable is used when comparing against the thresholds.</p>                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p><code>snmp</code>—To view this statement in the configuration.</p> <p><code>snmp-control</code>—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li> <li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li> <li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li> <li>• <a href="#">Understanding RMON on page 5470</a></li> <li>• <a href="#">Junos OS Network Management Configuration Guide</a></li> </ul> |



## security-level (Defining Access Privileges)

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>security-level (authentication   none   privacy) {<br/>    notify-view view-name;<br/>    read-view view-name;<br/>    write-view view-name;<br/>}</pre>                                  |
| <b>Hierarchy Level</b>          | [edit snmp v3 vacm access group <i>group-name</i> (default-context-prefix   context-prefix <i>context-prefix</i> ) security-model (any   usm   v1   v2c)]                                      |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Define the security level used for access privileges.                                                                                                                                          |
| <b>Default</b>                  | none                                                                                                                                                                                           |
| <b>Options</b>                  | <b>authentication</b> —Provide authentication but no encryption.<br><br><b>none</b> —No authentication and no encryption.<br><br><b>privacy</b> —Provide authentication and encryption.        |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring the Security Level</li></ul>                                                                                                                 |



## security-level (Generating SNMP Notifications)

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>security-level (authentication   none   privacy);</code>                                                                                                                                 |
| <b>Hierarchy Level</b>          | <code>[edit snmp v3 target-parameters <i>target-parameters-name</i> parameters]</code>                                                                                                         |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Configure the security level to use when generating SNMP notifications.                                                                                                                        |
| <b>Default</b>                  | <code>none</code>                                                                                                                                                                              |
| <b>Options</b>                  | <p><b>authentication</b>—Provide authentication but no encryption.</p> <p><b>none</b>—No authentication and no encryption.</p> <p><b>privacy</b>—Provide authentication and encryption.</p>    |
| <b>Required Privilege Level</b> | <p><code>snmp</code>—To view this statement in the configuration.</p> <p><code>snmp-control</code>—To add this statement to the configuration.</p>                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring the Security Level</li> </ul>                                                                                                               |



## security-model (Access Privileges)

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>security-model (usm   v1   v2c);</code>                                                                                                                                                  |
| <b>Hierarchy Level</b>          | <code>[edit snmp v3 vacm access group <i>group-name</i> (default-context-prefix   context-prefix <i>context-prefix</i>)]</code>                                                                |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Configure the security model for an SNMPv3 group. The security model is used to determine access privileges for the group.                                                                     |
| <b>Options</b>                  | <code>usm</code> —SNMPv3 security model.<br><br><code>v1</code> —SNMPv1 security model.<br><br><code>v2c</code> —SNMPv2c security model.                                                       |
| <b>Required Privilege Level</b> | <code>snmp</code> —To view this statement in the configuration.<br><code>snmp-control</code> —To add this statement to the configuration.                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring the Security Model</li></ul>                                                                                                                 |



## security-model (Group)

|                                 |                                                                                                                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>security-model (usm   v1   v2c) {   security-name security-name {     group group-name;   } }</pre>                                                                                                      |
| <b>Hierarchy Level</b>          | [edit snmp v3 vacm <a href="#">security-to-group</a> ]                                                                                                                                                        |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> |
| <b>Description</b>              | Define a security model for an SNMPv3 group and associate the security name of a user with the group. All users in the group have the same access privileges.                                                 |
| <b>Options</b>                  | <p><b>usm</b>—SNMPv3 security model.</p> <p><b>v1</b>—SNMPv1 security model.</p> <p><b>v2c</b>—SNMPv2c security model.</p>                                                                                    |
| <b>Required Privilege Level</b> | <p><b>snmp</b>—To view this statement in the configuration.</p> <p><b>snmp-control</b>—To add this statement to the configuration.</p>                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring the Security Model</li> </ul>                                                                                                                              |



## security-model (SNMP Notifications)

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | security-model (usm   v1   v2c);                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit snmp v3 target-parameters <i>target-parameters-name</i> parameters]                                                                                                                      |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Configure the security model for an SNMPv3 group. The security model is used for SNMP notifications.                                                                                           |
| <b>Options</b>                  | <b>usm</b> —SNMPv3 security model.<br><br><b>v1</b> —SNMPv1 security model.<br><br><b>v2c</b> —SNMPv2c security model.                                                                         |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring the Security Model</li></ul>                                                                                                                 |



## security-name (Community String)

|                            |                                                                                                                                                                                                                                                                |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>security-name <i>security-name</i>;</code>                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>     | <code>[edit snmp v3 <i>snmp-community</i> <i>community-index</i>]</code>                                                                                                                                                                                       |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                 |
| <b>Description</b>         | Associate a community string with the security name of a user. The community string, which is used for SNMPv1 and SNMPv2c clients in an SNMPv3 system, is configured at the <code>[edit snmp v3 snmp-community <i>community-index</i>]</code> hierarchy level. |
| <b>Options</b>             | <i>security-name</i> —Name that is used for messaging security and user access control.                                                                                                                                                                        |



**NOTE:** The security name must match the configured security name at the `[edit snmp v3 target-parameters target-parameters-name parameters]` hierarchy level when you configure traps or informs.

|                              |                                                                                  |
|------------------------------|----------------------------------------------------------------------------------|
| <b>Required Privilege</b>    | snmp—To view this statement in the configuration.                                |
| <b>Level</b>                 | snmp-control—To add this statement to the configuration.                         |
| <b>Related Documentation</b> | <ul style="list-style-type: none"> <li>Configuring the Security Names</li> </ul> |




## security-name (Security Group)

---

|                                 |                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>security-name <i>security-name</i> {<br/>    <i>group</i> <i>group-name</i>;<br/>}</code>                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit snmp v3 vacm security-to-group <b>security-model</b> (usm   v1   v2c)]                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                              |
| <b>Description</b>              | Associate the security name of a user (for SNMPv3 clients) or a community string (for SNMPv1 and SNMPv2c clients) with a configured security group.                                                                                                                                                                                         |
| <b>Options</b>                  | <b>security-name</b> —SNMPv3 secure username configured at the [edit snmp v3 usm local-engine <b>user</b> <i>username</i> ] hierarchy level that is used for messaging security. For SNMPv1 and SNMPv2c, the security name is the community string configured at the [edit snmp v3 snmp-community <b>community-index</b> ] hierarchy level. |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Assigning Security Names to Groups</li><li><a href="#">Assigning a Security Name to a Group on page 5547</a></li></ul>                                                                                                                                                                                |



## security-name (SNMP Notifications)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <code>security-name <i>security-name</i>;</code>                                                                                                                                                                                              |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <code>[edit snmp v3 target-parameters <i>target-parameters-name</i> parameters]</code>                                                                                                                                                        |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Configure the security name used when generating SNMP notifications.                                                                                                                                                                          |
| <b>Options</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <b><i>security-name</i></b> —If the SNMPv3 USM security model is used, identify the user when generating the SNMP notification. If the v1 or v2c security models are used, identify the SNMP community used when generating the notification. |
| <div>  <p><b>NOTE:</b> The access privileges for the group associated with this security name must allow this notification to be sent.</p> <p>If you are using the v1 or v2 security models, the security name at the <code>[edit snmp v3 vacm security-to-group]</code> hierarchy level must match the security name at the <code>[edit snmp v3 snmp-community <i>community-index</i>]</code> hierarchy level.</p> </div> |                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                 |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <ul style="list-style-type: none"> <li>Configuring the Security Name</li> </ul>                                                                                                                                                               |



## security-to-group

---

|                                 |                                                                                                                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>security-to-group {<br/>  security-model (usm   v1   v2c) {<br/>    group group-name;<br/>    security-name security-name;<br/>  }<br/>}</pre>                                                           |
| <b>Hierarchy Level</b>          | [edit snmp v3 vacm]                                                                                                                                                                                           |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> |
| <b>Description</b>              | <p>Configure the group to which a specific SNMPv3 security name belongs. The security name is used for messaging security.</p> <p>The remaining statements are explained separately.</p>                      |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Assigning Security Model and Security Name to a Group</li></ul>                                                                                                         |



## snmp

```

Syntax  snmp {
        client-list client-list-name {
            ip-addresses;
        }
        community community-name {
            authorization authorization;
            client-list-name client-list-name;
            clients {
                address restrict;
            }
            view view-name;
        }
        contact contact;
        description description;
        filter-duplicates;
        filter-interfaces;
        health-monitor {
            falling-threshold integer;
            interval seconds;
            rising-threshold integer;
        }
        interface [ interface-names ];
        location location;
        name name;
        nonvolatile {
            commit-delay seconds;
        }
        rmon {
            alarm index {
                description description;
                falling-event-index index;
                falling-threshold integer;
                falling-threshold-interval seconds;
                interval seconds;
                request-type;
                rising-event-index index;
                rising-threshold integer;
                sample-type (absolute-value | delta-value);
                startup-alarm (falling-alarm | rising-alarm | rising-or-falling alarm);
                syslog-subtag syslog-subtag;
                variable oid-variable;
            }
            event index {
                community community-name;
                description description;
                type type;
            }
            history history-index {
                bucket-size number;
                interface interface-name;
                interval seconds;
                owner owner-name;
            }
        }
    }

```



```
    }
  }
  traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable> <match
      regular-expression>;
    flag flag;
  }
  trap-group group-name {
    categories {
      category;
    }
    destination-port port-number;
    targets {
      address;
    }
    version (all | v1 | v2);
  }
  trap-options {
    agent-address outgoing-interface;
    source-address address;
  }
  v3 {
    notify name {
      tag tag-name;
      type trap;
    }
    notify-filter profile-name {
      oid object-identifier (include | exclude);
    }
    snmp-community community-index {
      community-name community-name;
      security-name security-name;
      tag tag-name;
    }
    target-address target-address-name {
      address address;
      address-mask address-mask;
      port port-number;
      retry-count number;
      tag-list tag-list;
      target-parameters target-parameters-name;
      timeout seconds;
    }
    target-parameters target-parameters-name {
      notify-filter profile-name;
      parameters {
        message-processing-model (v1 | v2c | V3);
        security-level (authentication | none | privacy);
        security-model (usm | v1 | v2c);
        security-name security-name;
      }
    }
  }
  usm {
    local-engine {
      user username {
        authentication-sha {
```



```

        authentication-password authentication-password;
    }
    authentication-md5 {
        authentication-password authentication-password;
    }
    authentication-none;
    privacy-aes128 {
        privacy-password privacy-password;
    }
    privacy-des {
        privacy-password privacy-password;
    }
    privacy-3des {
        privacy-password privacy-password;
    }
    privacy-none;
}
}
remote-engine engine-id {
    user username {
        authentication-sha {
            authentication-password authentication-password;
        }
        authentication-md5 {
            authentication-password authentication-password;
        }
        authentication-none;
        privacy-aes128 {
            privacy-password privacy-password;
        }
        privacy-des {
            privacy-password privacy-password;
        }
        privacy-3des {
            privacy-password privacy-password;
        }
        privacy-none {
            privacy-password privacy-password;
        }
    }
}
}
}
vacm {
    access {
        group group-name {
            (default-context-prefix | context-prefix context-prefix) {
                security-model (any | usm | v1 | v2c) {
                    security-level (authentication | none | privacy) {
                        notify-view view-name;
                        read-view view-name;
                        write-view view-name;
                    }
                }
            }
        }
    }
}
}

```



```
security-to-group {  
  security-model (usm | v1 | v2c) {  
    security-name security-name {  
      group group-name;  
    }  
  }  
}  
}  
}  
}  
view view-name {  
  oid object-identifier (include | exclude);  
}  
}  
}
```

**Hierarchy Level** [edit]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure SNMP.

The remaining statements are explained separately.

**Required Privilege Level** snmp—To view this statement in the configuration.  
snmp-control—To add this statement to the configuration.

**Related Documentation**

- [Understanding the Implementation of SNMP on page 5459](#)
- [Configuring SNMP on page 1223](#)



## snmp-community

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | snmp-community <i>community-index</i> {<br><i>community-name</i> <i>community-name</i> ;<br><i>security-name</i> <i>security-name</i> ;<br>tag <i>tag-name</i> ;<br>}                          |
| <b>Hierarchy Level</b>          | [edit snmp v3]                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Configure the SNMP community which authorizes SNMPv1 or SNMPv2c clients in an SNMPv3 system.                                                                                                   |
| <b>Options</b>                  | <i>community-index</i> —(Optional) String that identifies an SNMP community.<br><br>The remaining statements are explained separately.                                                         |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring the SNMPv3 Community</li> </ul>                                                                                                             |

## source-address (SNMP)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | source-address <i>address</i> ;                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit snmp trap-options]                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Set the source address of every SNMP trap packet sent by this switch to a single address regardless of the outgoing interface. If the source address is not specified, the default is to use the address of the outgoing interface as the source address.                                                                                                                                                                                       |
| <b>Options</b>                  | <i>address</i> —Source address of SNMP traps. You can configure the source address of trap packets two ways: <b>lo0</b> or a valid IPv4 address configured on one of the interfaces. The value <b>lo0</b> indicates that the source address of all SNMP trap packets is set to the lowest loopback address configured at interface <b>lo0</b> .<br><br><b>Default:</b> Disabled. (The source address is the address of the outgoing interface.) |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring the Source Address for SNMP Traps</li> </ul>                                                                                                                                                                                                                                                                                                                                                 |



## startup-alarm

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | startup-alarm (falling-alarm   rising-alarm   rising-or-falling-alarm);                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit snmp rmon alarm <i>index</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Set an initial alarm that is sent after the configured SNMP RMON alarm becomes active.                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Default</b>                  | rising-or-falling-alarm                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <p><b>falling-alarm</b>—Generated if the first sample after the alarm becomes active is equal to or greater than the falling threshold.</p> <p><b>rising-alarm</b>—Generated if the first sample after the alarm becomes active is equal to or greater than the rising threshold.</p> <p><b>rising-or-falling-alarm</b>—Generated if the first sample after the alarm entry becomes active is equal to or greater than either the rising threshold or the falling threshold.</p> |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li><li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li><li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li><li>• <a href="#">Understanding RMON on page 5470</a></li><li>• <a href="#">Junos OS Network Management Configuration Guide</a></li></ul>                                                            |



## syslog-subtag

---

|                                 |                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>syslog-subtag <i>syslog-subtag</i>;</code>                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit snmp rmon alarm <i>index</i> ]                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Add the <b>syslog-subtag</b> tag to the system log message. The tag should not exceed 80 uppercase characters.                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li> <li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li> <li>• <a href="#">Understanding RMON on page 5470</a></li> <li>• <a href="#">Junos OS Network Management Configuration Guide</a></li> </ul> |

## tag (Configuring Notification Targets)

---

|                                 |                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>tag <i>tag-name</i>;</code>                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit snmp v3 notify <i>name</i> ]                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                       |
| <b>Description</b>              | Configure a set of target addresses to receive SNMP traps or informs (for IPv4 packets only).                                                                                                                                           |
| <b>Options</b>                  | <b>tag-name</b> —Define the target addresses to which an SNMP notification is sent. Target addresses containing the same tag in their tag list are sent the same notification. The <b>tag-name</b> is not included in the notification. |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                           |



## tag (Configuring the SNMP Community)

---

|                            |                                                                                                              |
|----------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>tag tag-name;</code>                                                                                   |
| <b>Hierarchy Level</b>     | <code>[edit snmp v3 snmp-community community-index]</code>                                                   |
| <b>Release Information</b> | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                            |
| <b>Description</b>         | Configure a set of SNMP managers that are authorized to use a community string.                              |
| <b>Options</b>             | <b>tag-name</b> —Identify the set of addresses for the SNMP managers authorized to use the community string. |
| <b>Required Privilege</b>  | snmp—To view this statement in the configuration.                                                            |
| <b>Level</b>               | snmp-control—To add this statement to the configuration.                                                     |

## tag-list

---

|                              |                                                                                                                                                                                                |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                | <code>tag-list tag-list;</code>                                                                                                                                                                |
| <b>Hierarchy Level</b>       | <code>[edit snmp v3 target-address target-address-name]</code>                                                                                                                                 |
| <b>Release Information</b>   | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>           | Configure an SNMP tag list used to select target addresses.                                                                                                                                    |
| <b>Options</b>               | <b>tag-list</b> —Define sets of target addresses (tags). To specify more than one tag, specify the tag names as a space-separated list enclosed within double quotes.                          |
| <b>Required Privilege</b>    | snmp—To view this statement in the configuration.                                                                                                                                              |
| <b>Level</b>                 | snmp-control—To add this statement to the configuration.                                                                                                                                       |
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>Configuring the Trap Target Address</li></ul>                                                                                                            |



---

## target-address

---

**Syntax**    `target-address target-address-name {  
                  address address;  
                  address-mask address-mask;  
                  port port-number;  
                  retry-count number;  
                  tag-list tag-list;  
                  target-parameters target-parameters-name;  
                  timeout seconds;  
                  }`

**Hierarchy Level**    [edit snmp v3]

**Release Information**    Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Configure the address of an SNMP management application and the parameters to be used in sending notifications.

**Options**    *target-address-name*—String that identifies the target address.

The remaining statements are explained separately.

**Required Privilege Level**    snmp—To view this statement in the configuration.  
                                  snmp-control—To add this statement to the configuration.



## target-parameters

---

**Syntax** At the **[edit snmp v3]** hierarchy level:

```
target-parameters target-parameters-name {  
  profile-name;  
  parameters {  
    message-processing-model (v1 | v2c | V3);  
    security-level (authentication | none | privacy);  
    security-model (usm | v1 | v2c);  
    security-name security-name;  
  }  
}
```

At the **[edit snmp v3 target-address *target-address-name*]** hierarchy level:

```
target-parameters target-parameters-name;
```

**Hierarchy Level** [edit snmp v3]  
[edit snmp v3 target-address *target-address-name*]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure the message processing and security parameters for sending notifications to a particular management target. The target parameters are configured at the **[edit snmp v3]** hierarchy level. The remaining statements at this level are explained separately.

Then apply the target parameters configured at the **[edit snmp v3 target-parameters *target-parameters-name*]** hierarchy level to the target address configuration at the **[edit snmp v3]** hierarchy level.

**Required Privilege Level** snmp—To view this statement in the configuration.  
snmp-control—To add this statement to the configuration.

**Related Documentation**

- Defining and Configuring the Trap Target Parameters
- Applying Target Parameters



## targets

---

|                                 |                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>targets {<br/>    <i>address</i>;<br/>}</code>                                                                     |
| <b>Hierarchy Level</b>          | <code>[edit snmp trap-group <i>group-name</i>]</code>                                                                    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                        |
| <b>Description</b>              | Configure one or more systems to receive SNMP traps.                                                                     |
| <b>Options</b>                  | <b><i>address</i></b> —IPv4 or IPv6 address of the system to receive traps. You must specify an address, not a hostname. |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring SNMP Trap Groups on page 5538</a></li> </ul>            |

## timeout

---

|                                 |                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>timeout <i>seconds</i>;</code>                                                                                                                                    |
| <b>Hierarchy Level</b>          | <code>[edit snmp v3 target-address <i>target-address-name</i>]</code>                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                       |
| <b>Description</b>              | Configure the timeout period (in seconds) for SNMP informs.                                                                                                             |
| <b>Default</b>                  | 15 seconds                                                                                                                                                              |
| <b>Options</b>                  | <b><i>seconds</i></b> —Number of seconds to wait for an inform acknowledgment. If no acknowledgment is received within the timeout period, the inform is retransmitted. |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                           |



## traceoptions (SNMP)

---

**Syntax**    `traceoptions {  
              file filename <files number> <match regular-expression> <size size> <world-readable |  
              no-world-readable>;  
              flag flag;  
              no-remote-trace;  
          }`

**Hierarchy Level**    [edit snmp]

**Release Information**    Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Track the activities of SNMP agents on the switch and record the information in log files.



**NOTE:** The **traceoptions** statement is not supported on the QFabric system.

The output of the tracing operations is placed into log files in the **/var/log** directory. Each log file is named after the SNMP agent that generates it. The following logs are created in the **/var/log** directory when the **traceoptions** statement is used:

- chassisd
- craftd
- ilmid
- mib2d
- rmopd
- serviced
- snmpd

**Options**    **file *filename***—By default, the name of the log file that records trace output is the name of the process being traced (for example, **mib2d** or **snmpd**). Use this option to specify another name.

**files *number***—(Optional) Maximum number of trace files per SNMP subagent. When a trace file (for example, **snmpd**) reaches its maximum size, it is archived by being renamed to **snmpd.0**. The previous **snmpd.1** is renamed to **snmpd.2**, and so on. The oldest archived file is deleted.

**Range:** 2 through 1000 files

**Default:** 10 files

**flag *flag***—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements:

- **all**—Log all SNMP events.



- **configuration**—Log reading of configuration at the **[edit snmp]** hierarchy level.
- **database**—Log events involving storage and retrieval in the events database.
- **events**—Log important events.
- **general**—Log general events.
- **interface-stats**—Log physical and logical interface statistics.
- **nonvolatile-sets**—Log nonvolatile SNMP set request handling.
- **pdu**—Log SNMP request and response packets.
- **policy**—Log policy processing.
- **protocol-timeouts**—Log SNMP response timeouts.
- **routing-socket**—Log routing socket calls.
- **server**—Log communication with processes that are generating events.
- **subagent**—Log subagent restarts.
- **timer-events**—Log internally generated events.
- **varbind-error**—Log variable binding errors.

**match *regular-expression***—(Optional) Refine the output to include lines that contain the regular expression.

**size *size***—(Optional) Maximum size, in kilobytes (KB), of each trace file before it is closed and archived.

**Range:** 10 KB through 1 GB

**Default:** 1000 KB

**world-readable | no-world-readable**—(Optional) By default, log files can be accessed only by the user who configures the tracing operation. The **world-readable** option enables any user to read the file. To explicitly set the default behavior, use the **no-world-readable** option.

**Required Privilege Level**

|                                                          |
|----------------------------------------------------------|
| snmp—To view this statement in the configuration.        |
| snmp-control—To add this statement to the configuration. |

**Related Documentation**

- [Understanding Tracing and Logging Operations on page 5433](#)
- [Tracing SNMP Activity on a Device Running Junos OS on page 5731](#)



## trap-group

---

|                                 |                                                                                                                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>trap-group group-name {<br/>    categories {<br/>        category;<br/>    }<br/>    destination-port port-number;<br/>    targets {<br/>        address;<br/>    }<br/>}</pre>                                                                                                     |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for QFX Series switches.                                                                                                                                                                                                                   |
| <b>Description</b>              | Create a named group of hosts to receive the specified trap notifications. The name of the trap group is embedded in SNMP trap notification packets as one variable binding (varbind) known as the community name. At least one trap group must be configured for SNMP traps to be sent. |
| <b>Options</b>                  | <p><b>group-name</b>—Name of the trap group. If the name includes spaces, enclose it in quotation marks (" ").</p> <p>The remaining statements are explained separately.</p>                                                                                                             |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring SNMP Trap Groups on page 5538</a></li></ul>                                                                                                                                                                              |



---

## trap-options

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>trap-options {<br/>    agent-address outgoing-interface;<br/>    source-address address;<br/>}</pre>                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | <p>Using SNMP trap options, you can set the source address of every SNMP trap packet sent by the router or switch to a single address, regardless of the outgoing interface. In addition, you can set the agent address of each SNMPv1 trap. For more information about the contents of SNMPv1 traps, see RFC 1157.</p> <p>The remaining statements are explained separately.</p> |
| <b>Default</b>                  | Disabled                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Configuring SNMP Trap Options</li></ul>                                                                                                                                                                                                                                                                                                   |



## type (RMON Notification)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>type type;</code>                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit snmp rmon event <i>index</i> ]                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | Configure the type of notification generated when a rising or falling threshold is crossed.                                                                                                                                                                                                                                                                                                                           |
| <b>Default</b>                  | <code>log-and-trap</code>                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <p><b>type</b>—Type of notification. It can be one of the following:</p> <ul style="list-style-type: none"><li>• <b>log</b>—Add an entry to the <b>logTable</b> object.</li><li>• <b>log-and-trap</b>—Send an SNMP trap and add a log entry.</li><li>• <b>none</b>—No notifications are sent.</li><li>• <b>snmptrap</b>—Send an SNMP trap.</li></ul>                                                                  |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li><li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li><li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li><li>• <a href="#">Understanding RMON on page 5470</a></li><li>• <a href="#">Junos OS Network Management Configuration Guide</a></li></ul> |



## type (SNMPv3)

---

|                                 |                                                                                                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>type (inform   trap);</code>                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | <code>[edit snmp v3 notify <i>name</i>]</code>                                                                                                                                                                                                        |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br><b>inform</b> option added in Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Configure the type of SNMP notification.                                                                                                                                                                                                              |
| <b>Options</b>                  | <b>inform</b> —Defines the type of notification as an inform. SNMP informs are confirmed notifications.<br><br><b>trap</b> —Defines the type of notification as a trap. SNMP traps are unconfirmed notifications.                                     |
| <b>Required Privilege Level</b> | <code>snmp</code> —To view this statement in the configuration.<br><code>snmp-control</code> —To add this statement to the configuration.                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring SNMP Informs on page 5549</a></li> <li>• <a href="#">Configuring the SNMPv3 Trap Notification</a></li> </ul>                                                                         |

## user

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>user <i>username</i>;</code>                                                                                                                                                             |
| <b>Hierarchy Level</b>          | <code>[edit snmp v3 usm local-engine],</code><br><code>[edit snmp v3 usm remote-engine <i>engine-id</i>]</code>                                                                                |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Specify a user associated with an SNMPv3 group on a local or remote SNMP engine.                                                                                                               |
| <b>Options</b>                  | <b><i>username</i></b> —SNMPv3 user-based security model (USM) username.                                                                                                                       |
| <b>Required Privilege Level</b> | <code>snmp</code> —To view this statement in the configuration.<br><code>snmp-control</code> —To add this statement to the configuration.                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Creating SNMPv3 Users on page 5544</a></li> </ul>                                                                                         |



## usm

```

Syntax  usm {
        local-engine {
            user username {
                authentication-md5 {
                    authentication-password authentication-password;
                }
                authentication-none;
                authentication-sha {
                    authentication-password authentication-password;
                }
                privacy-aes128 {
                    privacy-password privacy-password;
                }
                privacy-des {
                    privacy-password privacy-password;
                }
                privacy-3des {
                    privacy-password privacy-password;
                }
                privacy-none {
                    privacy-password privacy-password;
                }
            }
        }
        remote-engine engine-id {
            user username {
                authentication-md5 {
                    authentication-password authentication-password;
                }
                authentication-none;
                authentication-sha {
                    authentication-password authentication-password;
                }
                privacy-aes128 {
                    privacy-password privacy-password;
                }
                privacy-des {
                    privacy-password privacy-password;
                }
                privacy-3des {
                    privacy-password privacy-password;
                }
                privacy-none {
                    privacy-password privacy-password;
                }
            }
        }
    }
}

```

Hierarchy Level [edit snmp v3]

Release Information Statement introduced before Junos OS Release 7.4.



Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure user-based security model (USM) information.

The remaining statements are explained separately.

**Required Privilege** snmp—To view this statement in the configuration.  
**Level** snmp-control—To add this statement to the configuration.

**Related** • [Creating SNMPv3 Users on page 5544](#)  
**Documentation** • Configuring the Remote Engine and Remote User



## v3

---

```
Syntax  v3 {
    notify name {
        tag tag-name;
        type trap;
    }
    notify-filter profile-name {
        oid object-identifier (include | exclude);
    }
    snmp-community community-index {
        community-name community-name;
        security-name security-name;
        tag tag-name;
    }
    target-address target-address-name {
        address address;
        address-mask address-mask;
        port port-number;
        retry-count number;
        tag-list tag-list;
        target-parameters target-parameters-name;
        timeout seconds;
    }
    target-parameters target-parameters-name {
        notify-filter profile-name;
        parameters {
            message-processing-model (v1 | v2c | v3);
            security-level (authentication | none | privacy);
            security-model (usm | v1 | v2c);
            security-name security-name;
        }
    }
}

usm {
    local-engine {
        user username {
            authentication-md5 {
                authentication-password authentication-password;
            }
            authentication-sha {
                authentication-password authentication-password;
            }
            authentication-none;
            privacy-aes128 {
                privacy-password privacy-password;
            }
            privacy-des {
                privacy-password privacy-password;
            }
            privacy-3des {
                privacy-password privacy-password;
            }
            privacy-none;
        }
    }
}
```



```

}
remote-engine engine-id {
  user username {
    authentication-md5 {
      authentication-password authentication-password;
    }
    authentication-sha {
      authentication-password authentication-password;
    }
    authentication-none;
    privacy-aes128 {
      privacy-password privacy-password;
    }
    privacy-des {
      privacy-password privacy-password;
    }
    privacy-3des {
      privacy-password privacy-password;
    }
    privacy-none {
      privacy-password privacy-password;
    }
  }
}
}
}
vacm {
  access {
    group group-name {
      (default-context-prefix | context-prefix context-prefix) {
        security-model (any | usm | v1 | v2c) {
          security-level (authentication | none | privacy) {
            notify-view view-name;
            read-view view-name;
            write-view view-name;
          }
        }
      }
    }
  }
}
security-to-group {
  security-model (usm | v1 | v2c) {
    security-name security-name {
      group group-name;
    }
  }
}
}
}
}

```

**Hierarchy Level** [edit snmp]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure SNMPv3.

The remaining statements are explained separately.



**Required Privilege** snmp—To view this statement in the configuration.  
**Level** snmp-control—To add this statement to the configuration.

**Related Documentation**

- [Minimum SNMPv3 Configuration on a Device Running Junos OS on page 5469](#)

---

## vacm

---

**Syntax**

```
vacm {  
  access {  
    group group-name {  
      (default-context-prefix | context-prefix context-prefix){  
        security-model (any | usm | v1 | v2c) {  
          security-level (authentication | none | privacy) {  
            notify-view view-name;  
            read-view view-name;  
            write-view view-name;  
          }  
        }  
      }  
    }  
  }  
  security-to-group {  
    security-model (usm | v1 | v2c);  
    security-name security-name {  
      group group-name;  
    }  
  }  
}
```

**Hierarchy Level** [edit snmp v3]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure view-based access control model (VACM) information, including access privileges such as security model and security level for a group of users.

The remaining statements are explained separately.

**Required Privilege** snmp—To view this statement in the configuration.  
**Level** snmp-control—To add this statement to the configuration.

**Related Documentation**

- [Defining Access Privileges for an SNMP Group](#)



## variable

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>variable <i>oid-variable</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | <code>[edit snmp rmon alarm <i>index</i>]</code>                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Set the object identifier (OID) of the MIB object (also called variable) to be monitored when you configure an SNMP RMON alarm. If the value of the monitored variable exceeds the configured rising threshold or falling threshold, an alarm is triggered and a corresponding event may be generated.                                                                                                                      |
| <b>Options</b>                  | <i>oid-variable</i> —OID of the MIB variable that is being monitored. The OID can be a dotted decimal (for example, <code>1.3.6.1.2.1.2.1.2.1.10.1</code> ) or the name of the MIB object—for example, <code>ifInOctets.1</code> .                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li> <li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li> <li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li> <li>• <a href="#">Understanding RMON on page 5470</a></li> <li>• <a href="#">Junos OS Network Management Configuration Guide</a></li> </ul> |




## version

---

|                                 |                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | version (all   v1   v2);                                                                                                         |
| <b>Hierarchy Level</b>          | [edit snmp trap-group <i>group-name</i> ]                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                |
| <b>Description</b>              | Specify the version number of SNMP traps.                                                                                        |
| <b>Default</b>                  | all—Send an SNMPv1 and SNMPv2 trap for every trap condition.                                                                     |
| <b>Options</b>                  | all—Send an SNMPv1 and SNMPv2 trap for every trap condition.<br><br>v1—Send SNMPv1 traps only.<br><br>v2—Send SNMPv2 traps only. |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.<br>snmp-control—To add this statement to the configuration.                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring SNMP Trap Groups on page 5538</a></li></ul>                      |



## view (Configuring a MIB View)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>view <i>view-name</i> {<br/>    oid <i>object-identifier</i> (include   exclude);<br/>}</code>                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit snmp]                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Define a MIB view. A MIB view identifies a group of MIB objects. Each MIB object in a view has a common OID prefix. Each object identifier represents a subtree of the MIB object hierarchy. The <b>view</b> statement uses a view to specify a group of MIB objects on which to define access. To enable a view, you must associate the view with a community by including the <b>view</b> statement at the <b>[edit snmp community <i>community-name</i>]</b> hierarchy level. |
|                                 | <div>  <p><b>NOTE:</b> To remove an OID completely, use the <code>delete view all oid oid-number</code> command but omit the <code>include</code> parameter.</p> </div>                                                                                                                                                                                                                         |
| <b>Options</b>                  | <p><b><i>view-name</i></b>—Name of the view.</p> <p>The remaining statement is explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | <p>snmp—To view this statement in the configuration.</p> <p>snmp-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring MIB Views on page 5541</a></li> <li>• Associating MIB Views with an SNMP User Group</li> <li>• <a href="#">community on page 1281</a></li> </ul>                                                                                                                                                                                                                                                                |



## view (Associating MIB View with a Community)

---

|                                 |                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>view view-name;</code>                                                                                                                            |
| <b>Hierarchy Level</b>          | <code>[edit snmp community community-name]</code>                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                       |
| <b>Description</b>              | Associate a view with a community. A view represents a group of MIB objects.                                                                            |
| <b>Options</b>                  | <b>view-name</b> —Name of the view. You must use a view name already configured in the <b>view</b> statement at the <b>[edit snmp]</b> hierarchy level. |
| <b>Required Privilege Level</b> | <b>snmp</b> —To view this statement in the configuration.<br><b>snmp-control</b> —To add this statement to the configuration.                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring the SNMP Community String</li></ul>                                                                   |

## write-view

---

|                                 |                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>write-view view-name;</code>                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | <code>[edit snmp v3 vacm access group group-name (default-context-prefix   context-prefix context-prefix) security-model (any   usm   v1   v2c) security-level (authentication   none   privacy)]</code> |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series switches.  |
| <b>Description</b>              | Associate the write view with a community (for SNMPv1 or SNMPv2c clients) or a group name (for SNMPv3 clients).                                                                                          |
| <b>Options</b>                  | <b>view-name</b> —Name of the view for which the SNMP user group has write permission.                                                                                                                   |
| <b>Required Privilege Level</b> | <b>snmp</b> —To view this statement in the configuration.<br><b>snmp-control</b> —To add this statement to the configuration.                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li><a href="#">Configuring MIB Views on page 5541</a></li><li>Configuring the Write View</li></ul>                                                                    |



## Configuration Statements for System Log Messages

---



## archive (All System Log Files)

---

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>archive &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;start-time <i>time</i>&gt; &lt;transfer-interval <i>interval</i>&gt;<br/>&lt;binary-data   no-binary-data&gt;;<br/>&lt;world-readable   no-world-readable&gt;;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>     | [edit system <a href="#">syslog</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>         | Configure archiving properties for all system log files.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>             | <p><b>files <i>number</i></b>—Maximum number of archived log files to retain. When the Junos OS logging utility has written a defined maximum amount of data to a log file <b>logfile</b>, it closes the file, compresses it, and renames it <b>logfile.0.gz</b> (the amount of data is determined by the <b>size</b> statement at this hierarchy level). The utility then opens and writes to a new file called <b>logfile</b>. When the new file reaches the maximum size, the <b>logfile.0.gz</b> file is renamed to <b>logfile.1.gz</b>, and the new file is closed, compressed, and renamed <b>logfile.0.gz</b>. By default, the logging facility creates up to ten archive files in this manner. Once the maximum number of archive files exists, each time the active log file reaches the maximum size, the contents of the oldest archive file are lost (overwritten by the next oldest file).</p> <p><b>Range:</b> 1 through 1000</p> <p><b>Default:</b> 10 files</p> <p><b>size <i>size</i></b>—Maximum amount of data that the Junos OS logging utility writes to a log file <b>logfile</b> before archiving it (closing it, compressing it, and changing its name to <b>logfile.0.gz</b>). The utility then opens and writes to a new file called <b>logfile</b>.</p> <p><b>Syntax:</b> <i>x k</i> to specify the number of kilobytes, <i>x m</i> for the number of megabytes, or <i>x g</i> for the number of gigabytes</p> <p><b>Range:</b> 64 KB through 1 GB</p> <p><b>Default:</b></p> <ul style="list-style-type: none"><li>• 128 KB for EX Series switches and J Series routers</li><li>• 1 MB for M Series, MX Series, and T Series routers, and the QFX3500 switch</li><li>• 10 MB for TX Matrix and TX Matrix Plus routers</li></ul> <p><b>binary-data   no-binary-data</b>—Mark file as containing binary data. This allows proper archiving of binary files, such as WTMP files (login records for UNIX based systems)..</p> <p><b>Default:</b> no-binary-data</p> <p><b>world-readable   no-world-readable</b>—Grant all users permission to read archived log files, or restrict the permission only to the <b>root</b> user and users who have the Junos OS <b>maintenance</b> permission.</p> <p><b>Default:</b> no-world-readable</p> |



**Required Privilege** system—To view this statement in the configuration.

**Level** system-control—To add this statement to the configuration.

**Related Documentation**

- [Specifying Log File Size, Number, and Archiving Properties on page 5563](#)



## archive (Individual System Log File)

---

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>archive &lt;archive-sites (<i>ftp-url</i> &lt;password <i>password</i>&gt;)&gt; &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;start-time "YYYY-MM-DD.hh:mm"&gt; &lt;transfer-interval <i>minutes</i>&gt; &lt;world-readable   no-world-readable&gt;;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>     | [edit system <a href="#">syslog file</a> <i>filename</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br><b>start-time</b> and <b>transfer-interval</b> statements introduced in Junos OS Release 8.5.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>         | Configure archiving properties for a specific system log file.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>             | <p><b>archive-sites <i>site-name</i></b>—FTP URL representing the destination for the archived log file (for information about how to specify valid FTP URLs, see <a href="#">“Format for Specifying Filenames and URLs in Junos OS CLI Commands” on page 48</a>). If more than one site name is configured, a list of archive sites for the system log files is created. When a file is archived, the router attempts to transfer the file to the first URL in the list, moving to the next site only if the transfer does not succeed. The log file is stored at the archive site with the filename specified at the <b>[edit system syslog]</b> hierarchy level.</p> <p><b>files <i>number</i></b>—Maximum number of archived log files to retain. When the Junos OS logging utility has written a defined maximum amount of data to a log file <i>logfile</i>, it closes the file, compresses it, and renames it <i>logfile.0.gz</i> (the amount of data is determined by the <b>size</b> statement at this hierarchy level). The utility then opens and writes to a new file called <i>logfile</i>. When the new file reaches the maximum size, the <i>logfile.0.gz</i> file is renamed to <i>logfile.1.gz</i>, and the new file is closed, compressed, and renamed <i>logfile.0.gz</i>. By default, the logging facility creates up to ten archive files in this manner. Once the maximum number of archive files exists, each time the active log file reaches the maximum size, the contents of the oldest archive file are lost (overwritten by the next oldest file).</p> <p><b>Range:</b> 1 through 1000</p> <p><b>Default:</b> 10 files</p> <p><b>password <i>password</i></b>—Password for authenticating with the site specified by the <b>archive-sites</b> statement.</p> <p><b>size <i>size</i></b>—Maximum amount of data that the Junos OS logging utility writes to a log file <i>logfile</i> before archiving it (closing it, compressing it, and changing its name to <i>logfile.0.gz</i>). The utility then opens and writes to a new file called <i>logfile</i>.</p> <p><b>Syntax:</b> <b>xk</b> to specify the number of kilobytes, <b>xm</b> for the number of megabytes, or <b>xg</b> for the number of gigabytes</p> <p><b>Range:</b> 64 KB through 1 GB</p> <p><b>Default:</b> 128 KB for J Series routers; 1 MB for M Series, MX Series, and T Series routers, and the QFX3500 switch; 10 MB for TX Matrix and TX Matrix Plus routers</p> |



**start-time "YYYY-MM-DD.hh:mm"**—Date and time in the local time zone for a one-time transfer of the active log file to the first reachable site in the list of sites specified by the **archive-sites** statement.

**transfer-interval *interval***—Interval at which to transfer the log file to an archive site.

**Range:** 5 through 2880 minutes

**world-readable | no-world-readable**—Grant all users permission to read archived log files, or restrict the permission only to the **root** user and users who have the Junos OS **maintenance** permission.

**Default:** no-world-readable

**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.

**Related Documentation**

- [Specifying Log File Size, Number, and Archiving Properties on page 5563](#)

## archive (QFabric System)

**Syntax** archive {  
size *size*;  
}

**Hierarchy Level** [edit system [syslog](#) file *filename*]

**Release Information** Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Configure the archiving properties for the system message log file.

**Options** **size *size***—Maximum amount of system log message data that the QFabric system stores in the log file.

**Syntax:** *xk* to specify the number of kilobytes, *xm* for the number of megabytes, or *xg* for the number of gigabytes

**Range:** 65 KB through 1 GB

**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.

**Related Documentation**

- [syslog on page 5719](#)



## console (System Logging)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>console {<br/>    <i>facility severity</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit system <a href="#">syslog</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Configure the logging of system messages to the system console.                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <p><b><i>facility</i></b>—Class of messages to log. To specify multiple classes, include multiple <b><i>facility severity</i></b> statements. For a list of the facilities, see <a href="#">Table 494 on page 5566</a>.</p> <p><b><i>severity</i></b>—Severity of the messages that belong to the facility specified by the paired <b><i>facility</i></b> name. Messages with severities of the specified level and higher are logged. For a list of the severities, see <a href="#">Table 495 on page 5566</a>.</p> |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Directing System Log Messages to the Console on page 5555</a></li><li>• <i>Junos OS System Log Messages Reference</i></li></ul>                                                                                                                                                                                                                                                                                                                                  |



## explicit-priority

|                                 |                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>explicit-priority;</code>                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> system syslog file <i>filename</i> ],<br>[edit logical-systems <i>logical-system-name</i> system syslog host],<br>[edit system syslog file <i>filename</i> ],<br>[edit system syslog host]                                                                         |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                      |
| <b>Description</b>              | Record the priority (facility and severity level) in each standard-format system log message directed to a file or remote destination.<br><br>When the <b>structured-data</b> statement is also included at the [edit system syslog file <i>filename</i> ] hierarchy level, this statement is ignored for the file. |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Including Priority Information in System Log Messages on page 5557</a></li> <li>• <i>Junos OS System Log Messages Reference</i></li> <li>• <a href="#">structured-data on page 5717</a></li> </ul>                                                             |

## facility-override

|                                 |                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>facility-override <i>facility</i>;</code>                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit system syslog host]                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                  |
| <b>Description</b>              | Substitute an alternate facility for the default facilities used when messages are directed to a remote destination.                                                                                            |
| <b>Options</b>                  | <i>facility</i> —Alternate facility to substitute for the default facilities. For a list of the possible facilities, see <a href="#">Table 497 on page 5568</a> .                                               |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Changing the Alternative Facility Name for Remote System Log Messages on page 5569</a></li> <li>• <i>Junos OS System Log Messages Reference</i></li> </ul> |



## file (QFabric System)

---

**Syntax**    file *filename* {  
              **explicit-priority**;  
              *facility severity*;  
              **match** "regular-expression";  
              }

**Hierarchy Level**    [edit system **syslog**]

**Release Information**    Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description**    Configure the logging of system messages to a file.



**NOTE:** On the QFabric system, a syslog file named **messages** is configured implicitly with facility and severity levels of **any any** and a size of 100 MBs. Therefore, you cannot specify the filename **messages** in your configuration, and automatic command completion does not work for that filename.

**Options**    *facility*—Class of messages to log. To specify multiple classes, include multiple *facility severity* statements.

*filename*—Filename that you specify with the **show log** command.

**Default:** Filename **messages**

*severity*—Severity of the messages that belong to the facility specified by the paired *facility* name. Messages with severities at the specified level and higher are logged.

The remaining statements are explained separately.

**Required Privilege Level**    system—To view this statement in the configuration.  
                                  system-control—To add this statement to the configuration.

**Related Documentation**    • [syslog on page 5719](#)



## file (System Logging)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>file <i>filename</i> {     <i>facility severity</i>;     archive {         <i>files number</i>;         <i>size size</i>;         (no-world-readable   world-readable);     }     explicit-priority;     match "<i>regular-expression</i>";     structured-data {         brief;     } }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit system <a href="#">syslog</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | Configure the logging of system messages to a file.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b><i>facility</i></b>—Class of messages to log. To specify multiple classes, include multiple <b><i>facility severity</i></b> statements. For a list of the facilities, see <a href="#">Table 494 on page 5566</a>.</p> <p><b><i>file filename</i></b>—File in the <code>/var/log</code> directory in which to log messages from the specified facility. To log messages to more than one file, include more than one <b><i>file</i></b> statement.</p> <p><b><i>severity</i></b>—Severity of the messages that belong to the facility specified by the paired <b><i>facility</i></b> name. Messages with severities of the specified level and higher are logged. For a list of the severities, see <a href="#">Table 495 on page 5566</a>.</p> <p>The remaining statements are explained separately.</p> |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Directing System Log Messages to a Log File on page 5553</a></li> <li>• <a href="#">Junos OS System Log Messages Reference</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



## files

---


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>files <i>number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit system syslog archive],<br>[edit system syslog file <i>filename</i> <a href="#">archive</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Configure the maximum number of archived log files to retain. When the Junos OS logging utility has written a defined maximum amount of data to a log file <i>logfile</i> , it closes the file, compresses it, and renames it to <i>logfile.0.gz</i> (for information about the maximum file size, see <a href="#">size</a> ). The utility then opens and writes to a new file called <i>logfile</i> . When the new file reaches the maximum size, the <i>logfile.0.gz</i> file is renamed to <i>logfile.1.gz</i> , and the new file is closed, compressed, and renamed <i>logfile.0.gz</i> . By default, the logging facility creates up to ten archive files in this manner. Once the maximum number of archive files exists, each time the active log file reaches the maximum size, the contents of the oldest archive file are lost (overwritten by the next oldest file). |
| <b>Options</b>                  | <i>number</i> —Maximum number of archived files.<br><b>Range:</b> 1 through 1000<br><b>Default:</b> 10 files                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Specifying Log File Size, Number, and Archiving Properties on page 5563</a></li><li>• <a href="#">Junos OS System Log Messages Reference</a></li><li>• <a href="#">size on page 5716</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |



## host (System)

|                                                |                                                                                                                                                                                                                                                                            |
|------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                  | <pre> host (hostname   other-routing-engine) {     facility severity;     explicit-priority;     facility-override facility;     log-prefix string;     match "regular-expression";     source-address source-address;     structured-data {         brief;     } } </pre> |
| <b>QFX Series</b>                              | <pre> host (hostname {     facility severity;     explicit-priority;     facility-override facility;     log-prefix string;     match "regular-expression";     port;     source-address source-address; } </pre>                                                          |
| <b>TX Matrix Router and EX Series Switches</b> | <pre> host (hostname   other-routing-engine   scc-master) {     facility severity;     explicit-priority;     facility-override facility;     log-prefix string;     match "regular-expression";     port;     source-address source-address; } </pre>                     |
| <b>TX Matrix Plus Router</b>                   | <pre> host (hostname   other-routing-engine   sfc0-master) {     facility severity;     explicit-priority;     facility-override facility;     log-prefix string;     match "regular-expression";     port;     source-address source-address; } </pre>                    |
| <b>Hierarchy Level</b>                         | [edit logical-systems <i>logical-system-name</i> system syslog],<br>[edit system syslog]                                                                                                                                                                                   |
| <b>Release Information</b>                     | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                             |
| <b>Description</b>                             | Configure the logging of system messages to a remote destination.                                                                                                                                                                                                          |



- Options**
- facility**—Class of messages to log. To specify multiple classes, include multiple **facility severity** statements. For a list of the facilities, see [Table 494 on page 5566](#).
  - hostname**—IPv4 address, IPv6 address, or fully qualified hostname of the remote machine to which to direct messages. To direct messages to multiple remote machines, include a **host** statement for each one.
  - other-routing-engine**—Direct messages to the other Routing Engine on a router or switch with two Routing Engines installed and operational.
-  **NOTE:** The **other-routing-engine** option is not applicable to the QFX Series.
- port**—Port number of the remote syslog server that can be modified.
- scc-master**—(TX Matrix routers only) On a T640 router that is part of a routing matrix, direct messages to the TX Matrix router.
- severity**—Severity of the messages that belong to the facility specified by the paired **facility** name. Messages with severities of the specified level and higher are logged. For a list of the severities, see [Table 495 on page 5566](#).
- sfc0-master**—(TX Matrix Plus routers only) On a T1600 router that is part of a routing matrix, direct messages to the TX Matrix Plus router.

The remaining statements are explained separately.

**Required Privilege Level**

- system—To view this statement in the configuration.
- system-control—To add this statement to the configuration.

- Related Documentation**
- Directing System Log Messages to a Remote Machine or the Other Routing Engine
  - Directing Messages to a Remote Destination from the Routing Matrix Based on the TX Matrix Router
  - Directing Messages to a Remote Destination from the Routing Matrix Based on a TX Matrix Plus Router
  - *Junos OS System Log Messages Reference*



## log-prefix (System)

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>log-prefix <i>string</i>;</code>                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit system syslog host]                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Include a text string in each message directed to a remote destination.                                                                                                                        |
| <b>Options</b>                  | <i>string</i> —Text string to include in each message.                                                                                                                                         |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Adding a Text String to System Log Messages on page 5552</a></li> <li>• <a href="#">Junos OS System Log Messages Reference</a></li> </ul> |

## match

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>match "regular-expression";</code>                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> system syslog file <i>filename</i> ],<br>[edit logical-systems <i>logical-system-name</i> system syslog user ( <i>username</i>   *)],<br>[edit system syslog file <i>filename</i> ],<br>[edit system syslog host <i>hostname</i>   other-routing-engine  scc-master)],<br>[edit system syslog user ( <i>username</i>   *)] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                              |
| <b>Description</b>              | Specify a text string that must (or must not) appear in a message for the message to be logged to a destination.                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Using Regular Expressions to Refine the Set of Logged Messages on page 5570</a></li> </ul>                                                                                                                                                                                                                             |



## size (System)


---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>size size;</code>                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit system syslog archive],<br>[edit system syslog file <i>filename</i> archive]                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                          |
| <b>Description</b>              | Configure the maximum amount of data that the Junos OS logging utility writes to a log file <b>logfile</b> before archiving it (closing it, compressing it, and changing its name to <b>logfile.0.gz</b> ). The utility then opens and writes to a new file called <b>logfile</b> . For information about the number of archive files that the utility creates in this way, see <a href="#">files</a> . |
| <b>Options</b>                  | <b>size</b> —Maximum size of each system log file, in kilobytes (KB), megabytes (MB), or gigabytes (GB).<br><b>Syntax:</b> <b>xk</b> to specify the number of kilobytes, <b>xm</b> for the number of megabytes, or <b>xg</b> for the number of gigabytes<br><b>Range:</b> 64 KB through 1 GB<br><b>Default:</b> 1 MB for MX Series routers and the QFX Series                                           |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Specifying Log File Size, Number, and Archiving Properties on page 5563</a></li><li>• <a href="#">Junos OS System Log Messages Reference</a></li><li>• <a href="#">files on page 5712</a></li></ul>                                                                                                                                                 |



## structured-data

---

|                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                                                                                                                                     | structured-data {<br>brief;<br>}                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                            | [edit logical-systems <i>logical-system-name</i> system syslog file <i>filename</i> ],<br>[edit system syslog file <i>filename</i> ]                                                                                                                                                                   |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                                                                                                                                        | Statement introduced in Junos OS Release 8.3.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                             |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                | Write system log messages to the log file in structured-data format, which complies with Internet draft draft-ietf-syslog-protocol-23, <i>The syslog Protocol</i> ( <a href="http://tools.ietf.org/html/draft-ietf-syslog-protocol-23">http://tools.ietf.org/html/draft-ietf-syslog-protocol-23</a> ). |
| <div>  <p><b>NOTE:</b> When this statement is included, other statements that specify the format for messages written to the file are ignored (the <code>explicit-priority</code> statement at the [edit system syslog file <i>filename</i>] hierarchy level and the <code>time-format</code> statement at the [edit system syslog] hierarchy level).</p> </div> |                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                   | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                      |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"> <li>Logging Messages in Structured-Data Format</li> <li><i>Junos OS System Log Messages Reference</i></li> <li><a href="#">explicit-priority on page 5709</a></li> <li><a href="#">time-format on page 5720</a></li> </ul>                                          |



## syslog (System)

---

```
Syntax  syslog {
        archive {
            (binary-data| no-binary-data);
            files number;
            size maximum-file-size;
            start-time "YYYY-MM-DD.hh:mm";
            transfer-interval minutes;
            (world-readable | no-world-readable);
        }
        console {
            facility severity;
        }
        file filename {
            facility severity;
            explicit-priority;
            match "regular-expression";
            archive {
                (binary-data| no-binary-data);
                files number;
                size maximum-file-size;
                start-time "YYYY-MM-DD.hh:mm";
                transfer-interval minutes;
                (world-readable | no-world-readable);
            }
            structured-data {
                brief;
            }
        }
        host (hostname | other-routing-engine | scc-master) {
            facility severity;
            explicit-priority;
            facility-override facility;
            log-prefix string;
            match "regular-expression";
            source-address source-address;
            structured-data {
                brief;
            }
            port port number;
        }
        log-rotate-frequency frequency;
        source-address source-address;
        time-format (millisecond | year | year millisecond);
        user (username | *) {
            facility severity;
            match "regular-expression";
        }
    }
```

Hierarchy Level [edit logical-systems *logical-system-name* system],  
[edit system]



|                                 |                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>Support at the <b>[edit logical-systems <i>logical-system-name</i> system]</b> hierarchy level introduced in Junos OS Release 11.4. |
| <b>Description</b>              | Configure the types of system log messages to log to files, a remote destination, user terminals, or the system console.<br><br>The remaining statements are explained separately.                                                                                                                                                    |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Junos OS System Log Configuration Overview</li> <li><i>Junos OS System Log Messages Reference</i></li> <li><a href="#">Overview of Single-Chassis System Logging Configuration on page 5505</a></li> </ul>                                                                                     |


## syslog (QFabric System)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> syslog {   file <i>filename</i> {     archive {       size <i>maximum-file-size</i>;     }     explicit-priority;     <i>facility severity</i>;     match "<i>regular-expression</i>";   }   host <i>hostname</i> {     explicit-priority;     <i>facility severity</i>;     facility-override <i>facility</i>;     log-prefix <i>string</i>;     match "<i>regular-expression</i>";   } } </pre> |
| <b>Hierarchy Level</b>          | [edit system]                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Configure system log messages for the QFabric system.<br><br>The remaining statements are explained separately.                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                       |



## time-format

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>time-format (year   millisecond   year millisecond);</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | <code>[edit system syslog]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | <p>Include the year, the millisecond, or both, in the timestamp on every standard-format system log message. The additional information is included for messages directed to each destination configured by a <b>file</b>, <b>console</b>, or <b>user</b> statement at the <code>[edit system syslog]</code> hierarchy level. As of Junos OS Release 11.4, the additional time information is also sent to destinations configured by a <b>host</b> statement.</p> <p>By default, the timestamp specifies the month, date, hour, minute, and second when the message was logged—for example, <b>Aug 21 12:36:30</b>. However, the timestamp for traceoption messages is specified in milliseconds by default, and is independent of the <code>[edit system syslog time-format]</code> statement.</p> |
|                                 | <div><p><b>NOTE:</b> When the <b>structured-data</b> statement is included at the <code>[edit system syslog file <i>filename</i>]</code> hierarchy level, this statement is ignored for the file.</p></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <p><b>millisecond</b>—Include the millisecond in the timestamp.</p> <p><b>year</b>—Include the year in the timestamp.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | <p><b>system</b>—To view this statement in the configuration.</p> <p><b>system-control</b>—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Including the Year or Millisecond in Timestamps on page 142</a></li><li>• <a href="#">Junos OS System Log Messages Reference</a></li><li>• <a href="#">structured-data on page 5717</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |



## user (System Logging)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> user (username   *) {     facility severity;     match "regular-expression"; } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit system syslog]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | Configure the logging of system messages to user terminals.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <p><b>*</b> (the asterisk)—Log messages to the terminal sessions of all users who are currently logged in.</p> <p><b>facility</b>—Class of messages to log. To specify multiple classes, include multiple <b>facility severity</b> statements. For a list of the facilities, see <a href="#">Table 494 on page 5566</a>.</p> <p><b>severity</b>—Severity of the messages that belong to the facility specified by the paired <b>facility</b> name. Messages with severities the specified level and higher are logged. For a list of the severities, see <a href="#">Table 495 on page 5566</a>.</p> <p><b>username</b>—Junos OS login name of the user whose terminal session is to receive system log messages. To log messages to more than one user's terminal session, include more than one <b>user</b> statement.</p> <p>The remaining statement is explained separately.</p> |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Directing System Log Messages to a User Terminal on page 5554</a></li> <li>• <a href="#">Junos OS System Logging Facilities and Message Severity Levels on page 5566</a></li> <li>• <a href="#">Junos OS System Log Messages Reference</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |







# Administration

- [Routine Monitoring Using the CLI on page 5723](#)
- [Monitoring Commands on page 5738](#)

## Routine Monitoring Using the CLI

---

- [Displaying a Log File from a Single-Chassis System on page 5723](#)
- [Monitoring Traffic Through the Router or Switch on page 5724](#)
- [Monitoring RMON MIB Tables on page 5727](#)
- [Monitoring SNMP on page 5728](#)
- [Monitoring System Log Messages on page 5729](#)
- [Pinging Hosts on page 5730](#)
- [Tracing SNMP Activity on a Device Running Junos OS on page 5731](#)
- [Using the Enterprise-Specific Utility MIB to Enhance SNMP Coverage on page 5735](#)
- [Displaying Commit Script Output on page 5737](#)

## Displaying a Log File from a Single-Chassis System

To display a log file stored on a single-chassis system such as the QFX3500 switch, enter Junos OS CLI operational mode and issue the following commands:

```
user@switch> show log log-filename
user@switch> file show log-file-pathname
```

By default, the commands display the file stored on the local Routing Engine.

The following example shows the output from the **show log messages** command:

```
user@switch1> show log messages
Nov  4 11:30:01 switch1 newsyslog[2283]: logfile turned over due to size>128K
Nov  4 11:30:01 switch1 newsyslog[2283]: logfile turned over due to size>128K
Nov  4 11:30:06 switch1 chassism[952]: CM ENV Monitor: set fan speed is 65 percent
for Fan 1
Nov  4 11:30:06 switch1 chassism[952]: CM ENV Monitor: set fan speed is 65 percent
for Fan 2
Nov  4 11:30:06 switch1 chassism[952]: CM ENV Monitor: set fan speed is 65 percent
for Fan 3
...
Nov  4 11:52:53 switch1 snmpd[944]: SNMPD_HEALTH_MON_INSTANCE: Health Monitor:
jroute daemon memory usage (Management
```



```

process): new instance detected (variable: sysAppElemRunMemory.5.6.2293)
Nov  4 11:52:53 switch1 snmpd[944]: SNMPD_HEALTH_MON_INSTANCE: Health Monitor:
jroute daemon memory usage (Command-line
interface): new instance detected (variable: sysAppElemRunMemory.5.8.2292)
...
Nov  4 12:08:30 switch1 rpdf[957]: task_connect: task BGP_100.10.10.1.6+179 addr
10.10.1.6+179: Can't assign requested
address
Nov  4 12:08:30 switch1 rpdf[957]: bgp_connect_start: connect 10.10.1.6 (Internal
AS 100): Can't assign requested address
Nov  4 12:10:24 switch1 mgd[2293]: UI_CMDLINE_READ_LINE: User 'jsmith', command
'exit '
Nov  4 12:10:27 switch1 mgd[2293]: UI_DBASE_LOGOUT_EVENT: User 'jsmith' exiting
configuration mode
Nov  4 12:10:31 switch1 mgd[2293]: UI_CMDLINE_READ_LINE: User 'jsmith', command
'show log messages

```

The following example shows the output from the **file show** command. The file in the pathname **/var/log/processes** has been previously configured to include messages from the **daemon** facility.

```

user@switch1> file show /var/log/processes
Feb 22 08:58:24 switch1 snmpd[359]: SNMPD_TRAP_WARM_START: trap_generate_warm:
SNMP trap: warm start
Feb 22 20:35:07 switch1 snmpd[359]: SNMPD_THROTTLE_QUEUE_DRAINED:
trap_throttle_timer_handler: cleared all throttled traps
Feb 23 07:34:56 switch1 snmpd[359]: SNMPD_TRAP_WARM_START: trap_generate_warm:
SNMP trap: warm start
Feb 23 07:38:19 switch1 snmpd[359]: SNMPD_TRAP_COLD_START: trap_generate_cold:
SNMP trap: cold start
...

```

#### Related Documentation

- [Interpreting Messages Generated in Standard Format on page 5563](#)
- [Interpreting Messages Generated in Structured-Data Format on page 5560](#)

## Monitoring Traffic Through the Router or Switch

To help with the diagnosis of a problem, display real-time statistics about the traffic passing through physical interfaces on the router or switch.

To display real-time statistics about physical interfaces, perform these tasks:

1. [Displaying Real-Time Statistics About All Interfaces on the Router or Switch on page 5724](#)
2. [Displaying Real-Time Statistics About an Interface on the Router or Switch on page 5725](#)

### Displaying Real-Time Statistics About All Interfaces on the Router or Switch

**Purpose** Display real-time statistics about traffic passing through all interfaces on the router or switch.

**Action** To display real-time statistics about traffic passing through all interfaces on the router or switch:

```
user@host> monitor interface traffic
```



## Sample Output

```

user@host> monitor interface traffic
host name          Seconds: 15          Time: 12:31:09
Interface  Link  Input packets  (pps)  Output packets  (pps)
so-1/0/0    Down      0          (0)      0          (0)
so-1/1/0    Down      0          (0)      0          (0)
so-1/1/1    Down      0          (0)      0          (0)
so-1/1/2    Down      0          (0)      0          (0)
so-1/1/3    Down      0          (0)      0          (0)
t3-1/2/0    Down      0          (0)      0          (0)
t3-1/2/1    Down      0          (0)      0          (0)
t3-1/2/2    Down      0          (0)      0          (0)
t3-1/2/3    Down      0          (0)      0          (0)
so-2/0/0     Up    211035      (1)    36778      (0)
so-2/0/1     Up    192753      (1)    36782      (0)
so-2/0/2     Up    211020      (1)    36779      (0)
so-2/0/3     Up    211029      (1)    36776      (0)
so-2/1/0     Up    189378      (1)    36349      (0)
so-2/1/1     Down      0          (0)    18747      (0)
so-2/1/2     Down      0          (0)    16078      (0)
so-2/1/3     Up      0          (0)    80338      (0)
at-2/3/0     Up      0          (0)      0          (0)
at-2/3/1     Down      0          (0)      0          (0)
Bytes=b, Clear=c, Delta=d, Packets=p, Quit=q or ESC, Rate=r, Up=^U, Down=^D

```

**Meaning** The sample output displays traffic data for active interfaces and the amount that each field has changed since the command started or since the counters were cleared by using the **C** key. In this example, the **monitor interface** command has been running for 15 seconds since the command was issued or since the counters last returned to zero.

### Displaying Real-Time Statistics About an Interface on the Router or Switch

**Purpose** Display real-time statistics about traffic passing through an interface on the router or switch.

**Action** To display traffic passing through an interface on the router or switch, use the following Junos OS CLI operational mode command:

```
user@host> monitor interface interface-name
```



## Sample Output

```

user@host> monitor interface so-0/0/1
Next='n', Quit='q' or ESC, Freeze='f', Thaw='t', Clear='c', Interface='i'
R1
Interface: so-0/0/1, Enabled, Link is Up
Encapsulation: PPP, Keepalives, Speed: OC3 Traffic statistics:
  Input bytes:                5856541 (88 bps)
  Output bytes:               6271468 (96 bps)
  Input packets:              157629 (0 pps)
  Output packets:             157024 (0 pps)
Encapsulation statistics:
  Input keepalives:           42353
  Output keepalives:          42320
  LCP state: Opened
Error statistics:
  Input errors:                0
  Input drops:                 0
  Input framing errors:        0
  Input runs:                  0
  Input giants:                0
  Policed discards:           0
  L3 incompletes:              0
  L2 channel errors:           0
  L2 mismatch timeouts:        0
  Carrier transitions:         1
  Output errors:               0
  Output drops:                0
  Aged packets:                0
Active alarms : None
Active defects: None
SONET error counts/seconds:
  LOS count                    1
  LOF count                    1
  SEF count                    1
  ES-S                         77
  SES-S                        77
SONET statistics:
  BIP-B1                       0
  BIP-B2                       0
  REI-L                        0
  BIP-B3                       0
  REI-P                        0
Received SONET overhead:  F1      : 0x00  J0      : 0xZ

```

**Meaning** The sample output shows the input and output packets for a particular SONET interface (**so-0/0/1**). The information can include common interface failures, such as SONET/SDH and T3 alarms, loopbacks detected, and increases in framing errors. For more information, see Checklist for Tracking Error Conditions.

To control the output of the command while it is running, use the keys shown in [Table 499 on page 5727](#).



Table 499: Output Control Keys for the monitor interface Command

| Action                                                                                                                                                                                                                       | Key      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| Display information about the next interface. The <b>monitor interface</b> command scrolls through the physical or logical interfaces in the same order that they are displayed by the <b>show interfaces terse</b> command. | <b>N</b> |
| Display information about a different interface. The command prompts you for the name of a specific interface.                                                                                                               | <b>I</b> |
| Freeze the display, halting the display of updated statistics.                                                                                                                                                               | <b>F</b> |
| Thaw the display, resuming the display of updated statistics.                                                                                                                                                                | <b>T</b> |
| Clear (zero) the current delta counters since <b>monitor interface</b> was started. It does not clear the accumulative counter.                                                                                              | <b>C</b> |
| Stop the <b>monitor interface</b> command.                                                                                                                                                                                   | <b>Q</b> |

See the Junos OS Operational Mode Commands for details on using match conditions with the **monitor traffic** command.

## Monitoring RMON MIB Tables

**Purpose** Monitor remote monitoring (RMON) alarm, event, and log tables.

**Action** To display the RMON tables:

```
user@switch> show snmp rmon
Alarm
Index  Variable description                               Value State
      5  monitor
      jnxOperatingCPU.9.1.0.0                        5 falling threshold

Event
Index  Type                               Last Event
      1  log and trap                     2010-07-10 11:34:17 PDT
Event Index: 1
Description: Event 1 triggered by Alarm 5, rising threshold (90) crossed,
(variable: jnxOperatingCPU.9.1.0.0, value: 100)
Time: 2010-07-10 11:34:07 PDT
Description: Event 1 triggered by Alarm 5, falling threshold (75) crossed,
(variable: jnxOperatingCPU.9.1.0.0, value: 5)
Time: 2010-07-10 11:34:17 PDT
```

**Meaning** The display shows that an alarm has been defined to monitor **jnxRmon** MIB object **jnxOperatingCPU**, which represents the CPU utilization of the Routing Engine. The alarm is configured to generate an event that sends an SNMP trap and adds an entry to the **logTable** in the RMON MIB. The log table shows that two occurrences of the event have been generated—one for rising above a threshold of 90 percent, and one for falling below a threshold of 75 percent.



- Related Documentation**
- [Configuring RMON Alarms and Events on page 5541](#)
  - [show snmp rmon on page 5794](#)
  - [show snmp rmon history on page 5798](#)
  - [clear snmp statistics on page 5741](#)
  - [clear snmp history on page 5740](#)

## Monitoring SNMP

There are several commands that you can access in Junos OS operational mode to monitor SNMP information. Some of the commands are:

- **show snmp health-monitor**, which displays the health monitor log and alarm information.
- **show snmp mib**, which displays information from the MIBs, such as device and system information.
- **show snmp statistics**, which displays SNMP statistics such as the number of packets, silent drops, and invalid output values.
- **show snmp rmon**, which displays the RMON alarm, event, history, and log information

The following example provides sample output from the **show snmp health-monitor** command:

```
user@switch> show snmp health-monitor
```

| Alarm |                                                                              |       |        |
|-------|------------------------------------------------------------------------------|-------|--------|
| Index | Variable description                                                         | Value | State  |
| 32768 | Health Monitor: root file system utilization<br>jnxHrStoragePercentUsed.1    | 58    | active |
| 32769 | Health Monitor: /config file system utilization<br>jnxHrStoragePercentUsed.2 | 0     | active |
| 32770 | Health Monitor: RE 0 CPU utilization<br>jnxOperatingCPU.9.1.0.0              | 0     | active |
| 32773 | Health Monitor: RE 0 Memory utilization<br>jnxOperatingBuffer.9.1.0.0        | 35    | active |
| 32775 | Health Monitor: jkernel daemon CPU utilization                               |       |        |
|       | Init daemon                                                                  | 0     | active |
|       | Chassis daemon                                                               | 50    | active |
|       | Firewall daemon                                                              | 0     | active |
|       | Interface daemon                                                             | 5     | active |
|       | SNMP daemon                                                                  | 11    | active |
|       | MIB2 daemon                                                                  | 42    | active |
|       | ...                                                                          |       |        |

The following example provides sample output from the **show snmp mib** command:

```
user@switch> show snmp mib walk system
```

```
sysDescr.0      = Juniper Networks, Inc. qfx3500s internet router, kernel
```



```
JUNOS 11.1-20100926.0 #0: 2010-09-26 06:17:38 UTC builder@abc.juniper.net:
/volume/build/junos/11.1/production/20100926.0/obj-xlr/bsd/sys/compile/JUNIPER-xxxxx
```

```
Build date: 2010-09-26 06:00:10 U
sysObjectID.0 = jnxProductQFX3500
sysUpTime.0 = 24444184
sysContact.0 = J Smith
sysName.0 = Lab QFX3500
sysLocation.0 = Lab
sysServices.0 = 4
```

The following example provides sample output from the **show snmp statistics** command:

```
user@switch> show snmp statistics
```

```
SNMP statistics:
```

```
Input:
```

```
Packets: 0, Bad versions: 0, Bad community names: 0,
Bad community uses: 0, ASN parse errors: 0,
Too big: 0, No such names: 0, Bad values: 0,
Read only: 0, General errors: 0,
Total request varbinds: 0, Total set varbinds: 0,
Get requests: 0, Get nexts: 0, Set requests: 0,
Get responses: 0, Traps: 0,
Silent drops: 0, Proxy drops: 0, Commit pending drops: 0,
Throttle drops: 0, Duplicate request drops: 0
```

```
Output:
```

```
Packets: 0, Too big: 0, No such names: 0,
Bad values: 0, General errors: 0,
Get requests: 0, Get nexts: 0, Set requests: 0,
Get responses: 0, Traps: 0
```

- Related Documentation**
- [health-monitor on page 1288](#)
  - [show snmp mib on page 5790](#)
  - [show snmp statistics on page 1370](#)

## Monitoring System Log Messages

**Purpose** Display system log messages about the QFX Series. By looking through a system log file for any entries pertaining to the interface that you are interested in, you can further investigate a problem with an interface on the switch.

**Action** To view system log messages:

```
user@switch1> show log messages
```



## Sample Output

```
Nov  4 11:30:01 switch1 newsyslog[2283]: logfile turned over due to size>128K
Nov  4 11:30:01 switch1 newsyslog[2283]: logfile turned over due to size>128K
Nov  4 11:30:06 switch1 chassism[952]: CM ENV Monitor: set fan speed is 65 percent
    for Fan 1
Nov  4 11:30:06 switch1 chassism[952]: CM ENV Monitor: set fan speed is 65 percent
    for Fan 2
Nov  4 11:30:06 switch1 chassism[952]: CM ENV Monitor: set fan speed is 65 percent
    for Fan 3
...
Nov  4 11:52:53 switch1 snmpd[944]: SNMPD_HEALTH_MON_INSTANCE: Health Monitor:
jroute daemon
memory usage (Management process): new instance detected (variable:
sysApp1ElmtRunMemory.5.6.2293)
Nov  4 11:52:53 switch1 snmpd[944]: SNMPD_HEALTH_MON_INSTANCE: Health Monitor:
jroute daemon
memory usage (Command-line interface): new instance detected (variable:
sysApp1ElmtRunMemory.5.8.2292)
...
Nov  4 12:10:24 switch1 mgd[2293]: UI_CMDLINE_READ_LINE: User 'jsmith', command
'exit '
Nov  4 12:10:27 switch1 mgd[2293]: UI_DBASE_LOGOUT_EVENT: User 'jsmith' exiting
configuration mode
Nov  4 12:10:31 switch1 mgd[2293]: UI_CMDLINE_READ_LINE: User 'jsmith', command
'show log messages'
```

**Meaning** The sample output shows the following entries in the **messages** file:

- A new log file was created when the previous file reached the maximum size of 128 kilobytes (KB).
- The fan speed for Fan 1, 2, and 3 is set at 65 percent.
- Health monitoring activity is detected.
- CLI commands were entered by the user **jsmith**.

## Pinging Hosts

**Purpose** Use the CLI **ping** command to verify that a host can be reached over the network. This command is useful for diagnosing host and network connectivity problems. The switch sends a series of Internet Control Message Protocol (ICMP) echo (ping) requests to a specified host and receives ICMP echo responses.

**Action** To use the **ping** command to send four requests (ping count) to **host3**:

**ping *host* count *number***



## Sample Output

```
ping host3 count 4
user@switch> ping host3 count 4
PING host3.site.net (176.26.232.111): 56 data bytes
64 bytes from 176.26.232.111: icmp_seq=0 ttl=122 time=0.661 ms
64 bytes from 176.26.232.111: icmp_seq=1 ttl=122 time=0.619 ms
64 bytes from 176.26.232.111: icmp_seq=2 ttl=122 time=0.621 ms
64 bytes from 176.26.232.111: icmp_seq=3 ttl=122 time=0.634 ms

--- host3.site.net ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max/stddev = 0.619/0.634/0.661/0.017 ms
```

- Meaning**
- The **ping** results show the following information:
    - Size of the ping response packet (in bytes).
    - IP address of the host from which the response was sent.
    - Sequence number of the ping response packet. You can use this value to match the ping response to the corresponding ping request.
    - Time-to-live (ttl) hop-count value of the ping response packet.
    - Total time between the sending of the ping request packet and the receiving of the ping response packet, in milliseconds. This value is also called round-trip time.
    - Number of ping requests (probes) sent to the host.
    - Number of ping responses received from the host.
    - Packet loss percentage.
    - Round-trip time statistics: minimum, average, maximum, and standard deviation of the round-trip time.

## Tracing SNMP Activity on a Device Running Junos OS

SNMP tracing operations track activity for SNMP agents and record the information in log files. The logged error descriptions provide detailed information to help you solve problems faster.

By default, Junos OS does not trace any SNMP activity. If you include the **traceoptions** statement at the **[edit snmp]** hierarchy level, the default tracing behavior is:

- Important activities are logged in files located in the **/var/log** directory. Each log is named after the SNMP agent that generates it. Currently, the following log files are created in the **/var/log** directory when the **traceoptions** statement is used:
  - chassisd
  - craftd
  - ilmid
  - mib2d



- `rmopd`
- `serviced`
- `snmpd`
- When a trace file named **filename** reaches its maximum size, it is renamed **filename.0**, then **filename.1**, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten. (For more information about how log files are created, see the *Junos OS System Log Messages Reference*.)
- Log files can be accessed only by the user who configured the tracing operation.

You cannot change the directory (`/var/log`) in which trace files are located. However, you can customize the other trace file settings by including the following statements at the `[edit snmp]` hierarchy level:

```
[edit snmp]
traceoptions {
  file <files number> <match regular-expression> <size size> <world-readable |
    no-world-readable>;
  flag flag;
  no-remote-trace;
}
```

These statements are described in the following sections:

- [Configuring the Number and Size of SNMP Log Files on page 5732](#)
- [Configuring Access to the Log File on page 5733](#)
- [Configuring a Regular Expression for Lines to Be Logged on page 5733](#)
- [Configuring the Trace Operations on page 5733](#)

### Configuring the Number and Size of SNMP Log Files

By default, when the trace file reaches 128 kilobytes (KB) in size, it is renamed **filename.0**, then **filename.1**, and so on, until there are three trace files. Then the oldest trace file (**filename.2**) is overwritten.

You can configure the limits on the number and size of trace files by including the following statements at the `[edit snmp traceoptions]` hierarchy level:

```
[edit snmp traceoptions]
file files number size size;
```

For example, set the maximum file size to 2 MB, and the maximum number of files to 20. When the file that receives the output of the tracing operation (**filename**) reaches 2 MB, **filename** is renamed **filename.0**, and a new file called **filename** is created. When the new **filename** reaches 2 MB, **filename.0** is renamed **filename.1** and **filename** is renamed **filename.0**. This process repeats until there are 20 trace files. Then the oldest file (**filename.19**) is overwritten by the newest file (**filename.0**).

The number of files can be from 2 through 1000 files. The file size of each file can be from 10 KB through 1 gigabyte (GB).



### Configuring Access to the Log File

By default, log files can be accessed only by the user who configured the tracing operation.

To specify that any user can read all log files, include the **file world-readable** statement at the **[edit snmp traceoptions]** hierarchy level:

```
[edit snmp traceoptions]
file world-readable;
```

To explicitly set the default behavior, include the **file no-world-readable** statement at the **[edit snmp traceoptions]** hierarchy level:

```
[edit snmp traceoptions]
file no-world-readable;
```

### Configuring a Regular Expression for Lines to Be Logged

By default, the trace operation output includes all lines relevant to the logged activities.

You can refine the output by including the **match** statement at the **[edit snmp traceoptions file filename]** hierarchy level and specifying a regular expression (regex) to be matched:

```
[edit snmp traceoptions]
file filename match regular-expression;
```

### Configuring the Trace Operations

By default, only important activities are logged. You can specify which trace operations are to be logged by including the following **flag** statement (with one or more tracing flags) at the **[edit snmp traceoptions]** hierarchy level:

```
[edit snmp traceoptions]
flag {
  all;
  configuration;
  database;
  events;
  general;
  interface-stats;
  nonvolatile-sets;
  pdu;
  policy;
  protocol-timeouts;
  routing-socket;
  server;
  subagent;
  timer;
  varbind-error;
}
```

Table 500 on page 5734 describes the meaning of the SNMP tracing flags.



Table 500: SNMP Tracing Flags

| Flag                     | Description                                                                 | Default Setting |
|--------------------------|-----------------------------------------------------------------------------|-----------------|
| <b>all</b>               | Log all operations.                                                         | Off             |
| <b>configuration</b>     | Log reading of the configuration at the <b>[edit snmp]</b> hierarchy level. | Off             |
| <b>database</b>          | Log events involving storage and retrieval in the events database.          | Off             |
| <b>events</b>            | Log important events.                                                       | Off             |
| <b>general</b>           | Log general events.                                                         | Off             |
| <b>interface-stats</b>   | Log physical and logical interface statistics.                              | Off             |
| <b>nonvolatile-set</b>   | Log nonvolatile SNMP set request handling.                                  | Off             |
| <b>pdu</b>               | Log SNMP request and response packets.                                      | Off             |
| <b>policy</b>            | Log policy processing.                                                      | Off             |
| <b>protocol-timeouts</b> | Log SNMP response timeouts.                                                 | Off             |
| <b>routing-socket</b>    | Log routing socket calls.                                                   | Off             |
| <b>server</b>            | Log communication with processes that are generating events.                | Off             |
| <b>subagent</b>          | Log subagent restarts.                                                      | Off             |
| <b>timer</b>             | Log internal timer events.                                                  | Off             |
| <b>varbind-error</b>     | Log variable binding errors.                                                | Off             |

To display the end of the log for an agent, issue the **show log agentd | last** operational mode command:

```
[edit]
user@host# run show log agentd | last
```

where **agent** is the name of an SNMP agent.

#### Related Documentation

- [Configuring SNMP on a Device Running Junos OS](#)
- [Configuration Statements at the \[edit snmp\] Hierarchy Level](#)
- [Example: Tracing SNMP Activity](#)
- [Configuring SNMP on page 1223](#)



## Using the Enterprise-Specific Utility MIB to Enhance SNMP Coverage

Even though the Junos OS has built-in performance metrics and monitoring options, you might need to have customized performance metrics. To make it easier for you to monitor such customized data through a standard monitoring system, the Junos OS provides you with an enterprise-specific Utility MIB that can store such data and thus extend SNMP support for managing and monitoring the data of your choice.

The enterprise-specific Utility MIB provides you with container objects of the following types: **32-bit counters**, **64-bit counters**, **signed integers**, **unsigned integers**, and **octet strings**. You can use these container MIB objects to store the data that are otherwise not supported for SNMP operations. You can populate data for these objects either by using CLI commands or with the help of Op scripts and an RPC API that can invoke the CLI commands.

The following CLI commands enable you to set and clear Utility MIB object values:

- `request snmp utility-mib set instance name object-type <counter | counter 64 | integer | string | unsigned integer> object-value value`
- `request snmp utility-mib clear instance name object-type <counter | counter 64 | integer | string | unsigned integer>`

The `instance name` option of the `request snmp utility-mib <set | clear>` command specifies the name of the data instance and is the main identifier of the data. The `object-type <counter | counter 64 | integer | string | unsigned integer>` option enables you specify the object type, and the `object-value value` option enables you to set the value of the object.

To automate the process of populating Utility MIB data, you can use a combination of an event policy and event script. The following examples show the configuration for an event policy to run `show system buffers` every hour and to store the `show system buffers` data in Utility MIB objects by running an event script (`check-mbufs.slax`).

### Event Policy Configuration

To configure an event policy that runs the `show system buffers` command every hour and invokes `check-mbufs.slax` to store the `show system buffers` data into Utility MIB objects, include the following statements at the `[edit]` hierarchy level:

```
event-options {
  generate-event {
    1-HOUR time-interval 600;
  }
  policy Mbufs {
    events 1-HOUR;
    then {
      event-script check-mbufs.slax; # script stored at /var/db/scripts/event/
    }
  }
  event-script {
    file check-mbufs.slax;
  }
}
```



**check-mbufs.slax** The following example shows the **check-mbufs.slax** script that is stored under **Script** **/var/db/scripts/event/**:

```

----- script START -----
version 1.0;

ns junos = "http://xml.juniper.net/junos/*/junos";
ns xnm = "http://xml.juniper.net/xnm/1.1/xnm";
ns jcs = "http://xml.juniper.net/junos/commit-scripts/1.0";
ns ext = "http://xmlsoft.org/XSLT/namespace";

match / {
  <op-script-results>{
    var $cmd = <command> "show system buffers";
    var $out = jcs:invoke($cmd);

    var $lines = jcs:break_lines($out);
    for-each ($lines) {
      if (contains(., "current/peak/max")) {
        var $pattern = "([0-9]+)/([0-9]+)/([0-9]+) mbufs";
        var $split = jcs:regex($pattern, .);
        var $result = $split[2];

        var $rpc = <request-snmp-utility-mib-set> {
          <object-type> "integer";
          <instance> "current-mbufs";
          <object-value> $result;
        }
        var $res = jcs:invoke($rpc);
      }
    }
  }
}
----- script END -----

```

You can run the following command to check the data stored in the Utility MIB as a result of the event policy and script shown in the preceding examples:

```

user@host> show snmp mib walk jnxUtilData ascii jnxUtilIntegerValue."current-mbufs"
= 0 jnxUtilIntegerTime."current-mbufs" = 07 da 05 0c 03 14 2c 00 2d 07 00
regress@caramels>

```



**NOTE:** The **show snmp mib walk** command is not available on the QFabric system, but you can use external SNMP client applications to perform this operation.

#### Related Documentation

- Understanding SNMP Implementation in Junos OS
- Configuring SNMP on Devices Running Junos OS
- Monitoring SNMP Activity and Tracking Problems That Affect SNMP Performance on a Device Running Junos OS
- Optimizing the Network Management System Configuration for the Best Results
- Configuring Options on Managed Devices for Better SNMP Response Time
- Managing Traps and Informs



- [Understanding the Implementation of SNMP on the QFabric System on page 5461](#)

## Displaying Commit Script Output

[Table 501 on page 5737](#) summarizes the Junos OS command-line interface (CLI) commands you can use to monitor and troubleshoot commit scripts. For more information about the `cscript.log` file, see [Tracing Commit Script Processing](#).



**NOTE:** Tracing commit script processing, including the `cscript.log` file, is not supported on the QFX3000-G QFabric system.

**Table 501: Commit Script Configuration and Operational Mode Commands**

| Task                                                                                                                                                                 | Command                                                                                |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| <b>Configuration Mode Commands</b>                                                                                                                                   |                                                                                        |
| Display errors and warnings generated by commit scripts.                                                                                                             | <code>commit</code> or <code>commit check</code>                                       |
| Display detailed information.                                                                                                                                        | <code>commit   display detail</code>                                                   |
| Display the underlying Extensible Markup Language (XML) data.                                                                                                        | <code>commit   display xml</code>                                                      |
| Display the postinheritance contents of the configuration database. This view includes transient changes, but does not include changes made in configuration groups. | <code>show   display commit-scripts</code>                                             |
| Display the postinheritance contents of the configuration database. This view excludes transient changes.                                                            | <code>show   display commit-scripts no-transients</code>                               |
| Display the postinheritance configuration in XML format.                                                                                                             | <code>show   display commit-scripts view</code>                                        |
| Viewing the configuration in XML format can be helpful when you are writing XML Path Language (XPath) expressions and configuration element tags.                    |                                                                                        |
| Display the postinheritance configuration in XML format, but exclude transient changes.                                                                              | <code>show   display commit-scripts view   display commit-scripts no-transients</code> |
| Display all configuration groups data, including script-generated changes to the groups.                                                                             | <code>show groups   display commit-scripts</code>                                      |



**Table 501: Commit Script Configuration and Operational Mode Commands** (*continued*)

| Task                                                                                       | Command                                                       |
|--------------------------------------------------------------------------------------------|---------------------------------------------------------------|
| Display a particular configuration group, including script-generated changes to the group. | <b>show groups <i>group-name</i>   display commit-scripts</b> |
| <b>Operational Mode Commands</b>                                                           |                                                               |
| Display logging data associated with all commit script processing.                         | <b>show log cscript.log</b>                                   |
| Display processing for only the most recent commit operation.                              | <b>show log cscript.log   last</b>                            |
| Display processing for script errors.                                                      | <b>show log cscript.log   match error</b>                     |
| Display processing for a particular script.                                                | <b>show log cscript.log   match <i>filename</i></b>           |

**Related Documentation**

- [Tracing Commit Script Processing](#)

## Monitoring Commands



## clear sflow collector statistics

|                                 |                                                                                                                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear sflow collector statistics                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                               |
| <b>Description</b>              | Clear the sample counters for all sFlow collectors.                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Monitoring Network Traffic Using sFlow Technology on page 5514</a></li> <li>• <a href="#">Configuring sFlow Technology on page 5532</a></li> <li>• <a href="#">show sflow collector on page 5780</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">clear sflow collector statistics on page 5739</a>                                                                                                                                                                                                                 |

### Sample Output

#### clear sflow collector statistics

The following example shows two output examples for the **show sflow collector** command, one before and one after the **clear sflow collector statistics** command was issued.

```
user@host> show sflow collector
Collector      Udp-port      No. of samples
address
10.1.1.1       6343          3174
10.1.2.1       6343          3562
```

```
user@host> clear sflow collector statistics
```

```
user@host> show sflow collector
Collector      Udp-port      No. of samples
address
10.1.1.1       6343          0
10.1.2.1       6343          0
```



## clear snmp history

---

|                                 |                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear snmp history ( <i>index</i>   all)                                                                                                                 |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                          |
| <b>Description</b>              | Delete the samples of Ethernet statistics collected for a history group.                                                                                 |
| <b>Options</b>                  | <p><b>all</b>—Clear all the entries in the history index.</p> <p><b><i>index</i></b>—Clear the contents of the specified entry in the history index.</p> |
| <b>Required Privilege Level</b> | clear                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">clear snmp statistics on page 5741</a></li></ul>                                                     |



---

## clear snmp statistics

---

|                                 |                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear snmp statistics                                                                                                                                                                    |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Clear Simple Network Management Protocol (SNMP) statistics.                                                                                                                              |
| <b>Options</b>                  | This command has no options.                                                                                                                                                             |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show snmp statistics on page 1370</a></li></ul>                                                                                      |
| <b>List of Sample Output</b>    | <a href="#">clear snmp statistics on page 5742</a>                                                                                                                                       |
| <b>Output Fields</b>            | See <a href="#">show snmp statistics</a> for an explanation of output fields.                                                                                                            |



## Sample Output

### clear snmp statistics

In the following example, SNMP statistics are displayed before and after the **clear snmp statistics** command is issued:

```
user@host> show snmp statistics
SNMP statistics:
  Input:
    Packets: 8, Bad versions: 0, Bad community names: 0,
    Bad community uses: 0, ASN parse errors: 0,
    Too bigs: 0, No such names: 0, Bad values: 0,
    Read onlys: 0, General errors: 0,
    Total request varbinds: 8, Total set varbinds: 0,
    Get requests: 0, Get nexts: 8, Set requests: 0,
    Get responses: 0, Traps: 0,
    Silent drops: 0, Proxy drops 0
  Output:
    Packets: 2298, Too bigs: 0, No such names: 0,
    Bad values: 0, General errors: 0,
    Get requests: 0, Get nexts: 0, Set requests: 0,
    Get responses: 8, Traps: 2290

user@host> clear snmp statistics

user@host> show snmp statistics
SNMP statistics:
  Input:
    Packets: 0, Bad versions: 0, Bad community names: 0,
    Bad community uses: 0, ASN parse errors: 0,
    Too bigs: 0, No such names: 0, Bad values: 0,
    Read onlys: 0, General errors: 0,
    Total request varbinds: 0, Total set varbinds: 0,
    Get requests: 0, Get nexts: 0, Set requests: 0,
    Get responses: 0, Traps: 0,
    Silent drops: 0, Proxy drops 0
  Output:
    Packets: 0, Too bigs: 0, No such names: 0,
    Bad values: 0, General errors: 0,
    Get requests: 0, Get nexts: 0, Set requests: 0,
    Get responses: 0, Traps: 0
```



## monitor traffic

**Syntax**    monitor traffic  
               <brief | detail | extensive>  
               <absolute-sequence>  
               <count *count*>  
               <interface *interface-name*>  
               <layer2-headers>  
               <matching *matching*>  
               <no-domain-names>  
               <no-promiscuous>  
               <no-resolve>  
               <no-timestamp>  
               <print-ascii>  
               <print-hex>  
               <resolve-timeout>  
               <size *size*>

**Release Information**    Command introduced before Junos OS Release 7.4.  
                               Command introduced in Junos OS Release 9.0 for EX Series switches.  
                               Command introduced in Junos OS Release 11.1 for the QFX Series.

**Description**    Display packet headers or packets received and sent from the Routing Engine.



### NOTE:

- Using the **monitor-traffic** command can degrade router or switch performance.
- Delays from DNS resolution can be eliminated by using the **no-resolve** option.



**NOTE:** This command is not supported on the QFabric system.

**Options**    **none**—(Optional) Display packet headers transmitted through **fxp0**. On a TX Matrix Plus router, display packet headers transmitted through **em0**.

**brief | detail | extensive**—(Optional) Display the specified level of output.

**absolute-sequence**—(Optional) Display absolute TCP sequence numbers.

**count *count***—(Optional) Specify the number of packet headers to display (0 through 1,000,000). The **monitor traffic** command quits automatically after displaying the number of packets specified.



**interface *interface-name***—(Optional) Specify the interface on which the **monitor traffic** command displays packet data. If no interface is specified, the **monitor traffic** command displays packet data arriving on the lowest-numbered interface.

**layer2-headers**—(Optional) Display the link-level header on each line.

**matching *matching***—(Optional) Display packet headers that match a regular expression. Use matching expressions to define the level of detail with which the **monitor traffic** command filters and displays packet data.

**no-domain-names**—(Optional) Suppress the display of the domain portion of hostnames. With the **no-domain-names** option enabled, the **monitor traffic** command displays only **team** for the hostname **team.company.net**.

**no-promiscuous**—(Optional) Do not put the interface into promiscuous mode.

**no-resolve**—(Optional) Suppress reverse lookup of the IP addresses.

**no-timestamp**—(Optional) Suppress timestamps on displayed packets.

**print-ascii**—(Optional) Display each packet in ASCII format.

**print-hex**—(Optional) Display each packet, except the link-level header, in hexadecimal format.

**resolve-timeout *timeout***—(Optional) Amount of time the router or switch waits for each reverse lookup before timing out. You can set the timeout for 1 through 4,294,967,295 seconds. The default is 4 seconds. To display each packet, use the **print-ascii**, **print-hex**, or **extensive** option.

**size *size***—(Optional) Read but do not display up to the specified number of bytes for each packet. When set to **brief** output, the default packet size is 96 bytes and is adequate for capturing IP, ICMP, UDP, and TCP packet data. When set to **detail** and **extensive** output, the default packet size is 1514. The **monitor traffic** command truncates displayed packets if the matched data exceeds the configured size.

**Additional Information** In the **monitor traffic** command, you can specify an expression to match by using the **matching** option and including the expression in quotation marks:

**monitor traffic matching "*expression*"**

Replace ***expression*** with one or more of the match conditions listed in [Table 502 on page 5745](#).



Table 502: Match Conditions for the monitor traffic Command

| Match Type    | Condition                                             | Description                                                                                                                                                                                                                                                                            |
|---------------|-------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Entity        | <b>host</b> [ <i>address</i>   <i>hostname</i> ]      | Matches packets that contain the specified address or hostname.<br><br>The protocol match conditions <b>arp</b> , <b>ip</b> , or <b>rarp</b> , or any of the directional match conditions can be prepended to the <b>host</b> match condition.                                         |
|               | <b>net</b> <i>address</i>                             | Matches packets with source or destination addresses containing the specified network address.                                                                                                                                                                                         |
|               | <b>net</b> <i>address mask mask</i>                   | Matches packets containing the specified network address and subnet mask.                                                                                                                                                                                                              |
|               | <b>port</b> ( <i>port-number</i>   <i>port-name</i> ) | Matches packets containing the specified source or destination TCP or UDP port number or port name.<br><br>In place of the numeric port address, you can specify a text synonym, such as <b>bgp</b> (179), <b>dhcp</b> (67), or <b>domain</b> (53) (the port numbers are also listed). |
| Directional   | <b>dst</b>                                            | Matches packets going to the specified destination. This match condition can be prepended to any of the entity type match conditions.                                                                                                                                                  |
|               | <b>src</b>                                            | Matches packets from a specified source. This match condition can be prepended to any of the entity type match conditions.                                                                                                                                                             |
|               | <b>src and dst</b>                                    | Matches packets that contain the specified source and destination addresses. This match condition can be prepended to any of the entity type match conditions.                                                                                                                         |
|               | <b>src or dst</b>                                     | Matches packets containing either of the specified addresses. This match condition can be prepended to any of the entity type match conditions.                                                                                                                                        |
| Packet Length | <b>less</b> <i>value</i>                              | Matches packets shorter than or equal to the specified value, in bytes.                                                                                                                                                                                                                |
|               | <b>greater</b> <i>value</i>                           | Matches packets longer than or equal to the specified value, in bytes.                                                                                                                                                                                                                 |



Table 502: Match Conditions for the monitor traffic Command (*continued*)

| Match Type | Condition                                                | Description                                                                                                                                                                                                                                                                                                                     |
|------------|----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Protocol   | <b>amt</b>                                               | Matches all AMT packets. Use the extensive level of output to decode the inner IGMP packets in addition to the AMT outer packet.                                                                                                                                                                                                |
|            | <b>arp</b>                                               | Matches all ARP packets.                                                                                                                                                                                                                                                                                                        |
|            | <b>ether</b>                                             | Matches all Ethernet packets.                                                                                                                                                                                                                                                                                                   |
|            | <b>ether (broadcast   multicast)</b>                     | Matches broadcast or multicast Ethernet frames. This match condition can be prepended with <b>src</b> and <b>dst</b> .                                                                                                                                                                                                          |
|            | <b>ether protocol (address   (arp   ip   rarp))</b>      | Matches packets with the specified Ethernet address or Ethernet packets of the specified protocol type. The <b>ether protocol</b> arguments <b>arp</b> , <b>ip</b> , and <b>rarp</b> are also independent match conditions, so they must be preceded by a backslash (\) when used in the <b>ether protocol</b> match condition. |
|            | <b>icmp</b>                                              | Matches all ICMP packets.                                                                                                                                                                                                                                                                                                       |
|            | <b>ip</b>                                                | Matches all IP packets.                                                                                                                                                                                                                                                                                                         |
|            | <b>ip (broadcast   multicast)</b>                        | Matches broadcast or multicast IP packets.                                                                                                                                                                                                                                                                                      |
|            | <b>ip protocol (address   (icmp   igmp   tcp   udp))</b> | Matches packets with the specified address or protocol type. The <b>ip protocol</b> arguments <b>icmp</b> , <b>tcp</b> , and <b>udp</b> are also independent match conditions, so they must be preceded by a backslash (\) when used in the <b>ip protocol</b> match condition.                                                 |
|            | <b>isis</b>                                              | Matches all IS-IS routing messages.                                                                                                                                                                                                                                                                                             |
|            | <b>rarp</b>                                              | Matches all RARP packets.                                                                                                                                                                                                                                                                                                       |
|            | <b>tcp</b>                                               | Matches all TCP datagrams.                                                                                                                                                                                                                                                                                                      |
|            | <b>udp</b>                                               | Matches all UDP datagrams.                                                                                                                                                                                                                                                                                                      |

To combine expressions, use the logical operators listed in [Table 503 on page 5746](#).

Table 503: Logical Operators for the monitor traffic Command

| Logical Operator (Highest to Lowest Precedence) | Description                                                                          |
|-------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>!</b>                                        | Logical NOT. If the first condition does not match, the next condition is evaluated. |



Table 503: Logical Operators for the monitor traffic Command (*continued*)

| Logical Operator (Highest to Lowest Precedence) | Description                                                                                                                                         |
|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| &&                                              | Logical AND. If the first condition matches, the next condition is evaluated. If the first condition does not match, the next condition is skipped. |
|                                                 | Logical OR. If the first condition matches, the next condition is skipped. If the first condition does not match, the next condition is evaluated.  |
| ()                                              | Group operators to override default precedence order. Parentheses are special characters, each of which must be preceded by a backslash (\).        |

You can use relational operators to compare arithmetic expressions composed of integer constants, binary operators, a length operator, and special packet data accessors. The arithmetic expression matching condition uses the following syntax:

```
monitor traffic matching "ether[0] & 1 != 0"arithmetic_expression relational_operator arithmetic_expression
```

The packet data accessor uses the following syntax:

```
protocol [byte-offset <size>]
```

The optional *size* field represents the number of bytes examined in the packet header. The available values are 1, 2, or 4 bytes. The following sample command captures all multicast traffic:

```
user@host> monitor traffic matching "ether[0] & 1 != 0"
```

To specify match conditions that have a numeric value, use the arithmetic and relational operators listed in [Table 504 on page 5748](#).



**NOTE:** Because the Packet Forwarding Engine removes Layer 2 header information before sending packets to the Routing Engine:

- The **monitor traffic** command cannot apply match conditions to inbound traffic.
- The **monitor traffic interface** command also cannot apply match conditions for Layer 3 and Layer 4 packet data, resulting in the match pipe option (`| match`) for this command for Layer 3 and Layer 4 packets not working either. Therefore, ensure that you specify match conditions as described in this command summary. For more information about match conditions, see [Table 502 on page 5745](#).
- The 802.1Q VLAN tag information included in the Layer 2 header is removed from all inbound traffic packets. Because the **monitor traffic interface ae[x]** command for aggregated Ethernet interfaces (such as ae0) only shows inbound traffic data, the command does not show VLAN tag information in the output.



**Table 504: Arithmetic and Relational Operators for the monitor traffic Command**

| Arithmetic or Relational Operator                         | Description                                                                         |
|-----------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Arithmetic Operator</b>                                |                                                                                     |
| +                                                         | Addition operator.                                                                  |
| -                                                         | Subtraction operator.                                                               |
| /                                                         | Division operator.                                                                  |
| &                                                         | Bitwise AND.                                                                        |
| *                                                         | Bitwise exclusive OR.                                                               |
|                                                           | Bitwise inclusive OR.                                                               |
| <b>Relational Operator (Highest to Lowest Precedence)</b> |                                                                                     |
| <=                                                        | If the first expression is less than or equal to the second, the packet matches.    |
| >=                                                        | If the first expression is greater than or equal to the second, the packet matches. |
| <                                                         | If the first expression is less than the second, the packet matches.                |
| >                                                         | If the first expression is greater than the second, the packet matches.             |
| =                                                         | If the compared expressions are equal, the packet matches.                          |
| !=                                                        | If the compared expressions are unequal, the packet matches.                        |

**Required Privilege Level** trace  
maintenance

**List of Sample Output** [monitor traffic count on page 5749](#)  
[monitor traffic detail count on page 5749](#)  
[monitor traffic extensive \(Absolute Sequence\) on page 5749](#)  
[monitor traffic extensive \(Relative Sequence\) on page 5749](#)  
[monitor traffic extensive count on page 5749](#)  
[monitor traffic interface on page 5750](#)  
[monitor traffic matching on page 5750](#)  
[monitor traffic \(TX Matrix Plus Router\) on page 5750](#)  
[monitor traffic \(QFX3500 Switch\) on page 5751](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request.



## Sample Output

**monitor traffic count**

```
user@host> monitor traffic count 2
listening on fxp0
04:35:49.814125 In my-server.home.net.1295 > my-server.work.net.telnet: . ack
4122529478 win 16798 (DF)
04:35:49.814185
Out my-server.work.net.telnet > my-server.home.net.1295: P
1:38(37) ack 0 win 17680 (DF) [tos 0x10]
```

**monitor traffic detail count**

```
user@host> monitor traffic detail count 2
listening on fxp0
04:38:16.265864 In my-server.home.net.1295 > my-server.work.net.telnet: . ack
4122529971 win 17678 (DF) (ttl 121, id 6812)
04:38:16.265926
Out my-server.work.net.telnet.telnet > my-server.home.net.1295: P 1:38(37) ack 0
win 17680 (DF) [tos 0x10] (ttl 6)
```

**monitor traffic extensive (Absolute Sequence)**

```
user@host> monitor traffic extensive no-domain-names no-resolve no-timestamp count 20
matching "tcp" absolute-sequence
listening on fxp0
In 207.17.136.193.179 > 192.168.4.227.1024: . 4042780859:4042780859(0)
ack 1845421797 win 16384 <nop,nop,timestamp 4935628 965951> [tos 0xc0] (ttl )
In 207.17.136.193.179 > 192.168.4.227.1024: P 4042780859:4042780912(53)
ack 1845421797 win 16384
<nop,nop,timestamp 4935628 965951>:
BGP [|BGP UPDAT)
In 192.168.4.227.1024 > 207.17.136.193.179:
P 1845421797:1845421852(55) ack 4042780912 win 16384 <nop,nop,timestamp 965951
4935628>: BGP [|BGP UPDAT)
...
```

**monitor traffic extensive (Relative Sequence)**

```
user@host> monitor traffic extensive no-domain-names no-resolve no-timestamp count 20
matching "tcp"
listening on fxp0
In 172.24.248.221.1680 > 192.168.4.210.23: . 396159737:396159737(0)
ack 1664980689 win 17574 (DF) (ttl 121, id 50003)
Out 192.168.4.210.23 > 172.24.248.221.1680: P 1:40(39)
ack 0 win 17680 (DF) [tos 0x10] (ttl 64, id 5394)
In 207.17.136.193.179 > 192.168.4.227.1024: P 4042775817:4042775874(57)
ack 1845416593 win 16384 <nop,nop,timestamp 4935379 965690>: BGP [|BGP UPDAT)
...
```

**monitor traffic extensive count**

```
user@host> monitor traffic extensive count 5 no-domain-names no-resolve
listening on fxp013:18:17.406933
In 192.168.4.206.2723610880 > 172.17.28.8.2049:
40 null (ttl 64, id 38367)13:18:17.407577
In 172.17.28.8.2049 > 192.168.4.206.2723610880:
reply ok 28 null (ttl 61, id 35495)13:18:17.541140
In 0:e0:1e:42:9c:e0 0:e0:1e:42:9c:e0 9000 60:
0000 0100 0000 0000
0000 0000 0000 0000
0000 0000 0000 0000
```



```

0000 0000 0000 0000
0000 0000 0000 0000
0000 0000 000013:18:17.591513
In 172.24.248.156.4139 > 192.168.4.210.23:
3556964918:3556964918(0)
ack 295526518 win 17601 (DF)
(ttl 121, id 14)13:18:17.591568
Out 192.168.4.210.23 >
172.24.248.156.4139: P 1:40(39)
ack 0 win 17680 (DF) [tos 0x10]
(ttl 64, id 52376)

```

#### monitor traffic interface

```

user@host> monitor traffic interface fxp0
listening on fxp0.0
18:17:28.800650 In server.home.net.723 > host1-0.lab.home.net.log
18:17:28.800733 Out host2-0.lab.home.net.login > server.home.net.7
18:17:28.817813 In host30.lab.home.net.syslog > host40.home0
18:17:28.817846 In host30.lab.home.net.syslog > host40.home0
...

```

#### monitor traffic matching

```

user@host> monitor traffic matching "net 192.168.1.0/24"
verbose output suppressed, use <detail> or <extensive> for full protocol decode
Address resolution is ON. Use <no-resolve> to avoid any reverse lookup delay.
Address resolution timeout is 4s.
Listening on fxp0, capture size 96 bytes

Reverse lookup for 192.168.1.255 failed (check DNS reachability).
Other reverse lookup failures will not be reported.
Use no-resolve to avoid reverse lookups on IP addresses.

21:55:54.003511 In IP truncated-ip - 18 bytes missing!
192.168.1.17.netbios-ns > 192.168.1.255.netbios-ns: UDP, length 50
21:55:54.003585 Out IP truncated-ip - 18 bytes missing!
192.168.1.17.netbios-ns > 192.168.1.255.netbios-ns: UDP, length 50
21:55:54.003864 In arp who-has 192.168.1.17 tell 192.168.1.9
...

```

#### monitor traffic (TX Matrix Plus Router)

```

user@host> monitor traffic
verbose output suppressed, use <detail> or <extensive> for full protocol decode
Address resolution is ON. Use <no-resolve> to avoid any reverse lookup delay.
Address resolution timeout is 4s.
Listening on em0, capture size 96 bytes
04:11:59.862121 Out IP truncated-ip - 25 bytes missing!
summit-em0.englab.juniper.net.syslog > sv-log-01.englab.juniper.net.syslog:
SYSLOG kernel.info, length: 57
04:11:59.862303
Out IP truncated-ip - 25 bytes missing!
summit-em0.englab.juniper.net.syslog >
sv-log-02.englab.juniper.net.syslog: SYSLOG kernel.info, length: 57
04:11:59.923948
In IP aj-em0.englab.juniper.net.65235 >
summit-em0.englab.juniper.net.telnet: .
ack 1087492766 win 33304 <nop,nop,timestamp 42366734 993490>
04:11:59.923983 Out IP truncated-ip - 232 bytes missing!
summit-em0.englab.juniper.net.telnet > aj-em0.englab.juniper.net.65235: P
1:241(240) ack 0 win 33304
<nop,nop,timestamp 993590 42366734>
04:12:00.022900
In IP aj-em0.englab.juniper.net.65235 >

```



```

summit-em0.englab.juniper.net.telnet: . ack 241 win 33304 <nop,nop,timestamp
42366834 993590>
04:12:00.141204
In IP truncated-ip - 40 bytes missing!
ipg-lnx-shell11.juniper.net.46182 > summit-em0.englab.juniper.net.telnet: P
2950530356:2950530404(48) ack 485494987 win 63712
<nop,nop,timestamp 1308555294 987086>
04:12:00.141345
Out IP summit-em0.englab.juniper.net.telnet >
ipg-lnx-shell11.juniper.net.46182: P 1:6(5)
ack 48 win 33304
<nop,nop,timestamp 993809 1308555294>
04:12:00.141572
In IP ipg-lnx-shell11.juniper.net.46182 >
summit-em0.englab.juniper.net.telnet: .
ack 6 win 63712
<nop,nop,timestamp 1308555294 993809>
04:12:00.141597
Out IP summit-em0.englab.juniper.net.telnet >
ipg-lnx-shell11.juniper.net.46182: P 6:10(4) ack 48 win 33304
<nop,nop,timestamp 993810 1308555294>
04:12:00.141821
In IP ipg-lnx-shell11.juniper.net.46182 >
summit-em0.englab.juniper.net.telnet: .
ack 10 win 63712 <nop,nop,timestamp 1308555294 993810>
04:12:00.141837 Out IP truncated-ip - 2 bytes missing!
summit-em0.englab.juniper.net.telnet >
ipg-lnx-shell11.juniper.net.46182: P 10:20(10) ack 48 win 33304
<nop,nop,timestamp 993810 1308555294>
04:12:00.142072
In IP ipg-lnx-shell11.juniper.net.46182 >
summit-em0.englab.juniper.net.telnet: . ack 20 win 63712
<nop,nop,timestamp 1308555294 993810>
04:12:00.142089 Out IP summit-em0.englab.juniper.net.telnet >
ipg-lnx-shell11.juniper.net.46182: P 20:28(8) ack 48 win 33304 <nop,nop,timestamp
993810 1308555294>
04:12:00.142321
In IP ipg-lnx-shell11.juniper.net.46182 >
summit-em0.englab.juniper.net.telnet: .
ack 28 win 63712 <nop,nop,timestamp 1308555294 993810>
04:12:00.142337
Out IP truncated-ip - 1 bytes missing!
summit-em0.englab.juniper.net.telnet >
ipg-lnx-shell11.juniper.net.46182: P 28:37(9) ack 48 win 33304 <nop,nop,timestamp
993810 1308555294>
...

```

#### monitor traffic (QFX3500 Switch)

```

user@switch> monitor traffic
verbose output suppressed, use <detail> or <extensive> for full protocol decode
Address resolution is ON. Use <no-resolve> to avoid any reverse lookup delay.
Address resolution timeout is 4s.
Listening on me4, capture size 96 bytes
Reverse lookup for 172.22.16.246 failed (check DNS reachability).
Other reverse lookup failures will not be reported.
Use <no-resolve> to avoid reverse lookups on IP addresses.
16:35:32.240873 Out IP truncated-ip - 112 bytes missing!
labqfx-me0.lab4.juniper.net.ssh >
172.22.16.246.telefinder: P 4200727624:4200727756(132) ack 2889954831 win 65535
16:35:32.240900 Out IP truncated-ip - 176 bytes missing!
labqfx-me0.lab4.juniper.net.ssh >
172.22.16.246.telefinder: P 132:328(196) ack 1 win 65535

```



...



## ping

**Syntax**    `ping host`  
               `<bypass-routing>`  
               `<count requests>`  
               `<detail>`  
               `<do-not-fragment>`  
               `<inet | inet6>`  
               `<interface source-interface>`  
               `<interval seconds>`  
               `<logical-system logical-system-name>`  
               `<loose-source value>`  
               `<mac-address mac-address>`  
               `<no-resolve>`  
               `<pattern string>`  
               `<rapid>`  
               `<record-route>`  
               `<routing-instance routing-instance-name>`  
               `<size bytes>`  
               `<source source-address>`  
               `<strict >`  
               `<strict-source value.>`  
               `<tos type-of-service>`  
               `<ttl value>`  
               `<verbose>`  
               `<vpls instance-name>`  
               `<wait seconds>`

**Syntax (QFX Series)**    `ping host`  
                               `<bypass-routing>`  
                               `<count requests>`  
                               `<detail>`  
                               `<do-not-fragment>`  
                               `<inet>`  
                               `<interface source-interface>`  
                               `<interval seconds>`  
                               `<logical-system logical-system-name>`  
                               `<loose-source value>`  
                               `<mac-address mac-address>`  
                               `<no-resolve>`  
                               `<pattern string>`  
                               `<rapid>`  
                               `<record-route>`  
                               `<routing-instance routing-instance-name>`  
                               `<size bytes>`  
                               `<source source-address>`  
                               `<strict>`  
                               `< strict-source value>`  
                               `<tos type-of-service>`  
                               `<ttl value>`  
                               `<verbose>`  
                               `<wait seconds>`

**Release Information**    Command introduced before Junos OS Release 7.4.



Command introduced in Junos OS Release 9.0 for EX Series switches.  
Command introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Check host reachability and network connectivity. The **ping** command sends Internet Control Message Protocol (ICMP) ECHO\_REQUEST messages to elicit ICMP ECHO\_RESPONSE messages from the specified host. Press Ctrl+c to interrupt a ping command.

**Options** **host**—IP address or hostname of the remote system to ping.

**bypass-routing**—(Optional) Bypass the normal routing tables and send ping requests directly to a system on an attached network. If the system is not on a directly attached network, an error is returned. Use this option to ping a local system through an interface that has no route through it.

**count requests**—(Optional) Number of ping requests to send. The range of values is 1 through 2,000,000,000. The default value is an unlimited number of requests.

**detail**—(Optional) Include in the output the interface on which the ping reply was received.

**do-not-fragment**—(Optional) Set the do-not-fragment (DF) flag in the IP header of the ping packets. For IPv6 packets, this option disables fragmentation.



**NOTE:** In Junos OS Release 11.1 and later, when issuing the **ping** command for an IPv6 route with the **do-not-fragment** option, the maximum ping packet size is calculated by subtracting 48 bytes (40 bytes for the IPV6 header and 8 bytes for the ICMP header) from the MTU. Therefore, if the ping packet size (including the 48-byte header) is greater than the MTU, the ping operation might fail.

**inet**—(Optional) Ping Packet Forwarding Engine IPv4 routes.

**inet6**—(Optional) Ping Packet Forwarding Engine IPv6 routes.

**interface source-interface**—(Optional) Interface to use to send the ping requests.

**interval seconds**—(Optional) How often to send ping requests. The range of values, in seconds, is 1 through infinity. The default value is 1.

**logical-system logical-system-name**—(Optional) Name of logical system from which to send the ping requests.

Alternatively, enter the **set cli logical-system logical-system-name** command and then run the **ping** command. To return to the main router, enter the **clear cli logical-system** command.

**loose-source value**—(Optional) Intermediate loose source route entry (IPv4). Open a set of values.



**mac-address *mac-address***—(Optional) Ping the physical or hardware address of the remote system you are trying to reach.

**no-resolve**—(Optional) Do not attempt to determine the hostname that corresponds to the IP address.

**pattern *string***—(Optional) Specify a hexadecimal fill pattern to include in the ping packet.

**rapid**—(Optional) Send ping requests rapidly. The results are reported in a single message, not in individual messages for each ping request. By default, five ping requests are sent before the results are reported. To change the number of requests, include the **count** option.

**record-route**—(Optional) Record and report the packet's path (IPv4).

**routing-instance *routing-instance-name***—(Optional) Name of the routing instance for the ping attempt.

**size *bytes***—(Optional) Size of ping request packets. The range of values, in bytes, is **0** through **65,468**. The default value is **56**, which is effectively 64 bytes because 8 bytes of ICMP header data are added to the packet.

**source *source-address***—(Optional) IP address of the outgoing interface. This address is sent in the IP source address field of the ping request. If this option is not specified, the default address is usually the loopback interface (**lo.0**).

**strict**—(Optional) Use the strict source route option (IPv4).

**strict-source *value***—(Optional) Intermediate strict source route entry (IPv4). Open a set of values.

**tos *type-of-service***—(Optional) Set the type-of-service (ToS) field in the IP header of the ping packets. The range of values is **0** through **255**.

**ttl *value***—(Optional) Time-to-live (TTL) value to include in the ping request (IPv6). The range of values is **0** through **255**.

**verbose**—(Optional) Display detailed output.

**vpls *instance-name***—(Optional) Ping the instance to which this VPLS belongs.

**wait *seconds***—(Optional) Maximum wait time, in seconds, after the final packet is sent. If this option is not specified, the default delay is **10** seconds. If this option is used without the count option, a default count of **5** packets is used.

**Required Privilege Level** network

**Related Documentation** • [Configuring the Junos OS ICMPv4 Rate Limit for ICMPv4 Routing Engine Messages](#)

**List of Sample Output** [ping hostname on page 5756](#)  
[ping hostname rapid on page 5756](#)



[ping hostname size count on page 5756](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request. An exclamation point (!) indicates that an echo reply was received. A period (.) indicates that an echo reply was not received within the timeout period. An x indicates that an echo reply was received with an error code. These packets are not counted in the received packets count. They are accounted for separately.

## Sample Output

### ping hostname

```
user@host> ping skye
PING skye.net (192.168.169.254): 56 data bytes
64 bytes from 192.168.169.254: icmp_seq=0 ttl=253 time=1.028 ms
64 bytes from 192.168.169.254: icmp_seq=1 ttl=253 time=1.053 ms
64 bytes from 192.168.169.254: icmp_seq=2 ttl=253 time=1.025 ms
64 bytes from 192.168.169.254: icmp_seq=3 ttl=253 time=1.098 ms
64 bytes from 192.168.169.254: icmp_seq=4 ttl=253 time=1.032 ms
64 bytes from 192.168.169.254: icmp_seq=5 ttl=253 time=1.044 ms
^C [abort]
```

### ping hostname rapid

```
user@host> ping skye rapid
PING skye.net (192.168.169.254): 56 data bytes
!!!!!!
--- skye.net ping statistics ---
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max/stddev = 0.956/0.974/1.025/0.026 ms
```

### ping hostname size count

```
user@host> ping skye size 200 count 5
PING skye.net (192.168.169.254): 200 data bytes
208 bytes from 192.168.169.254: icmp_seq=0 ttl=253 time=1.759 ms
208 bytes from 192.168.169.254: icmp_seq=1 ttl=253 time=2.075 ms
208 bytes from 192.168.169.254: icmp_seq=2 ttl=253 time=1.843 ms
208 bytes from 192.168.169.254: icmp_seq=3 ttl=253 time=1.803 ms
208 bytes from 192.168.169.254: icmp_seq=4 ttl=253 time=17.898 ms

--- skye.net ping statistics ---
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max = 1.759/5.075/17.898 ms
```



## ping fabric multicast-flow

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ping fabric multicast-flow source-fmep-id <i>source-fmep-id</i> fma-name <i>fma-name</i><br/>flow-spec-name <i>flow-specification-name</i><br/>&lt;verbose&gt;</code>                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Command introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | Send a fabric multicast ping command to the multicast group destination fabric maintenance endpoints (FMEPs) configured in the flow specification. Send a single PDU with a timeout after 1 second.                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <p><b>flow-spec-name <i>flow-specification-name</i></b>—Name of the flow specification that defines the protocol parameters (unicast or multicast) for the fabric ping operation.</p> <p><b>fma-name <i>fma-name</i></b>—Name of the FMA.</p> <p><b>source-fmep-id <i>source-fmep-id</i></b>—FMEP ID that is the source of the fabric ping operation.</p> <p><b>verbose</b>—(Optional) Detailed version of the output display.</p>                                                |
| <b>Required Privilege Level</b> | <p><b>interface</b>—To view this statement in the configuration.</p> <p><b>interface-control</b>—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Overview of Internal Fabric Monitoring on page 5451</a></li> <li>• <a href="#">Configuring a Fabric Maintenance Association on page 5527</a></li> <li>• <a href="#">Configuring Flow Specifications on page 5528</a></li> <li>• <a href="#">fabric (OAM) on page 5599</a></li> <li>• <a href="#">ping fabric unicast-flow on page 5759</a></li> <li>• <a href="#">traceroute fabric unicast-flow on page 5806</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">ping fabric multicast-flow on page 5758</a>                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Output Fields</b>            | <a href="#">Table 505 on page 5757</a> lists the output fields for the <b>ping fabric-multicast-flow</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                         |

**Table 505: ping fabric multicast-flow Output Fields**

| Field Name                      | Field Description                              |
|---------------------------------|------------------------------------------------|
| Using fabric flow-specification | Name of the flow specification.                |
| Ethernet frame-size             | Ethernet frame size in bytes.                  |
| Source-IP                       | MAC address of the source FMEP interface.      |
| Destination-IP                  | MAC address of the destination FMEP interface. |



Table 505: ping fabric multicast-flow Output Fields (*continued*)

| Field Name                     | Field Description                          |
|--------------------------------|--------------------------------------------|
| Protocol                       | IP protocol.                               |
| received response from fmep-id | FMEP ID from which responses are received. |

## Sample Output

ping fabric  
multicast-flow

```
user@host> ping fabric multicast-flow source-fmep-id 3 fma-name fma1 flow-spec-name fspec2  
verbose
```

```
Using fabric flow-specification: fspec2  
Ethernet frame-size: 256  
Source-IP: 87.238.205.21  
Destination-IP: 225.0.0.1 IP  
Protocol: 17  
received response from fmep-id 32775...  
received response from fmep-id 32794...  
received response from fmep-id 32795...  
sent 1 requests, received 3 responses
```



## ping fabric unicast-flow

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | ping fabric unicast-flow <i>fma-name</i> <i>fma-name</i> source-fmep-id <i>source-fmep-id</i> dest-fmep-id <i>dest-fmep-id</i> flow-spec-name <i>flow-specification-name</i><br><count <i>count</i> ><br><forced-fte-interface <i>fte-interface</i> ><br><verbose>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Command introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Send a unicast fabric ping command to the destination fabric maintenance endpoints (FMEPs) specified.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>                  | <p><b>count</b> <i>count</i>—(Optional) Number of fabric ping PDUs to send.<br/>The maximum PDU count is 5. The default PDU count is 1.</p> <p><b>dest-fmep-id</b> <i>destination-fmep-id</i>—ID of the destination FMEP of the fabric ping operation.</p> <p><b>flow-spec-name</b> <i>flow-specification-name</i>—Name of the flow specification that defines the protocol parameters (unicast or multicast) for the fabric ping operation.</p> <p><b>fma-name</b> <i>fma-name</i>—Name of the FMA.</p> <p><b>forced-fte-interface</b> <i>fte-interface</i>—(Optional) Forces the fabric ping operation to use the specified FTE interface to inject the PDU into the fabric instead of using the internal forwarding path lookup table to determine the FTE interface.</p> <p><b>source-fmep-id</b> <i>source-fmep-id</i>—ID of the FMEP that is the source of the fabric ping operation.</p> <p><b>verbose</b>—(Optional) Detailed version of the output display.</p> |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Overview of Internal Fabric Monitoring on page 5451</a></li> <li>• <a href="#">Configuring a Fabric Maintenance Association on page 5527</a></li> <li>• <a href="#">Configuring Flow Specifications on page 5528</a></li> <li>• <a href="#">fabric (OAM) on page 5599</a></li> <li>• <a href="#">ping fabric multicast-flow on page 5757</a></li> <li>• <a href="#">traceroute fabric unicast-flow on page 5806</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>List of Sample Output</b>    | <p><a href="#">ping fabric unicast-flow on page 5760</a></p> <p><a href="#">ping fabric unicast-flow (With Masking Enabled on the Flow Specification) on page 5760</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Output Fields</b>            | <a href="#">Table 506 on page 5760</a> lists the output fields for the <b>ping fabric-unicast-flow</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



Table 506: ping fabric unicast-flow Output Fields

| Field Name                                                                                       | Field Description                                                      |
|--------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| Fabric flow ping between source <i>source-fmep-name</i> destination <i>destination-fmep-name</i> | Path of the unicast-flow ping between the source and detination FMEPs. |
| Using fabric flow-specification                                                                  | Name of the flow specification.                                        |
| Ethernet frame-size                                                                              | Ethernet frame size in bytes.                                          |
| Source-MAC                                                                                       | MAC address of the source FMEP interface.                              |
| Destination-MAC                                                                                  | MAC address of the destination FMEP interface.                         |
| Ethertype                                                                                        | EtherType protocol.                                                    |
| received response from fmep-id                                                                   | ID of the FMEP sending the response.                                   |

## Sample Output

### ping fabric unicast-flow

```
user@host> ping fabric unicast-flow fma-name fma1 source-fmep-id 1 dest-fmep-id 2
flow-spec-name fspec1 verbose
```

```
Fabric flow ping between source ED1494 destination ED1497
Using fabric flow-specification: fspec1
Ethernet frame-size: 256
Source-MAC: 0:2:B1:61:3B:96
Destination-MAC: 0:26:78:90:70:21
EtherType: 8295
received response from fmep-id 2...
sent 1 requests, received 1 responses
```

### ping fabric unicast-flow (With

```
user@host> ping fabric unicast-flow fma-name fma1 source-fmep-id 1 dest-fmep-id 2
flow-spec-name fspec1 verbose
```

```
Fabric flow ping between source ED1494 destination ED1497
```



**Masking Enabled on  
the Flow Specification)**

```
Using fabric flow-specification: fspec1
Ethernet frame-size: 256
Source-MAC: 0:1:20:A0:0:1
Destination-MAC: 0:8A:3A:B3:7D:67
Source-MAC Mask: FF:F8:FF:FF:FF:FF
Ethertype: 26785
Current Source-MAC value: 0:1:20:a0:0:1
received response from fmep-id 2...
Current Source-MAC value: 0:2:20:a0:0:1
received response from fmep-id 2...
Current Source-MAC value: 0:3:20:a0:0:1
received response from fmep-id 2...
Current Source-MAC value: 0:4:20:a0:0:1
received response from fmep-id 2...
Current Source-MAC value: 0:5:20:a0:0:1
received response from fmep-id 2...
Current Source-MAC value: 0:6:20:a0:0:1
received response from fmep-id 2...
Current Source-MAC value: 0:7:20:a0:0:1
received response from fmep-id 2...
sent 7 requests, received 7 responses
```



## request snmp spoof-trap

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <b>request snmp spoof-trap</b><br><b>&lt;trap&gt; variable-bindings &lt;object&gt; &lt;instance&gt; &lt;value&gt;</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Release Information      | Command introduced in Junos OS Release 8.2.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Description              | Spoof (mimic) the behavior of a Simple Network Management Protocol (SNMP) trap.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Options                  | <b>&lt;trap&gt;</b> —Name of the trap to spoof.<br><br><b>variable-bindings &lt;object&gt; &lt;instance&gt; &lt;value&gt;</b> —(Optional) List of variables and values to include in the trap. Each variable binding is specified as an object name, the object instance, and the value (for example, <b>ifIndex[14] = 14</b> ). Enclose the list of variable bindings in quotation marks ( " ") and use a comma to separate each object name, instance, and value definition (for example, <b>variable-bindings "ifIndex[14] = 14, ifAdminStatus[14] = 1, ifOperStatus[14] = 2"</b> ). Objects included in the trap definition that do not have instances and values specified as part of the command are included in the trap and spoofed with automatically generated instances and values.<br><br><b>&lt;dummy name&gt;</b> —A dummy trap name to display the list of available traps.<br><br><b>Question mark (?)</b> —Question mark? to display possible completions. |
| Required Privilege Level | request                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| List of Sample Output    | <a href="#">request snmp spoof-trap (with Variable Bindings) on page 5763</a><br><a href="#">request snmp spoof-trap (Illegal Trap Name) on page 5763</a><br><a href="#">request snmp spoof-trap (Question Mark ?) on page 5767</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |



## Sample Output

request snmp  
spooof-trap (with  
Variable Bindings)

```
user@host> request snmp spooof-trap linkUp variable-bindings "ifIndex[14] = 14, ifAdminStatus[14]
= 1, ifOperStatus[14] = 2"
Spooof trap request result: trap sent successfully
```

request snmp  
spooof-trap (Illegal  
Trap Name)

```
user@host> request snmp spooof-trap xx
Spooof trap request result: trap not found
```

```
Allowed Traps:
adslAtucInitFailureTrap
adslAtucPerfESsThreshTrap
adslAtucPerfLofsThreshTrap
adslAtucPerfLolsThreshTrap
adslAtucPerfLossThreshTrap
adslAtucPerfLprsThreshTrap
adslAtucRateChangeTrap
adslAturPerfESsThreshTrap
adslAturPerfLofsThreshTrap
adslAturPerfLossThreshTrap
adslAturPerfLprsThreshTrap
adslAturRateChangeTrap
apsEventChannelMismatch
apsEventFEPLF
apsEventModeMismatch
apsEventPSBF
apsEventSwitchover
authenticationFailure
bfdSessDown
bfdSessUp
bgpBackwardTransition
bgpEstablished
coldStart
dlswTrapCircuitDown
dlswTrapCircuitUp
dlswTrapTConnDown
dlswTrapTConnPartnerReject
dlswTrapTConnProtViolation
dlswTrapTConnUp
dsx1LineStatusChange
dsx3LineStatusChange
entConfigChange
fallingAlarm
frDLCIStatusChange
ggsnTrapChanged
ggsnTrapCleared
ggsnTrapNew
gmpsTunnelDown
ifMauJabberTrap
ipv6IfStateChange
isisAreaMismatch
isisAttemptToExceedMaxSequence
isisAuthenticationFailure
isisAuthenticationTypeFailure
isisCorruptedLSPDetected
isisDatabaseOverload
isisIDLmMismatch
isisLSPTooLargeToPropagate
isisManualAddressDrops
```



isisMaxAreaAddressesMismatch  
isisOriginatingLSPBufferSizeMismatch  
isisOwnLSPPurge  
isisProtocolsSupportedMismatch  
isisRejectedAdjacency  
isisSequenceNumberSkip  
isisVersionSkew  
jnxAccessAuthServerDisabled  
jnxAccessAuthServerEnabled  
jnxAccessAuthServiceDown  
jnxAccessAuthServiceUp  
jnxBfdSessDetectionTimeHigh  
jnxBfdSessTxIntervalHigh  
jnxBgpM2BackwardTransition  
jnxBgpM2Established  
jnxCmCfgChange  
jnxCmRescueChange  
jnxCollFlowOverload  
jnxCollFlowOverloadCleared  
jnxCollFtpSwitchover  
jnxCollMemoryAvailable  
jnxCollMemoryUnavailable  
jnxCollUnavailableDest  
jnxCollUnavailableDestCleared  
jnxCollUnsuccessfulTransfer  
jnxDfcHardMemThresholdExceeded  
jnxDfcHardMemUnderThreshold  
jnxDfcHardPpsThresholdExceeded  
jnxDfcHardPpsUnderThreshold  
jnxDfcSoftMemThresholdExceeded  
jnxDfcSoftMemUnderThreshold  
jnxDfcSoftPpsThresholdExceeded  
jnxDfcSoftPpsUnderThreshold  
jnxEventTrap  
jnxExampleStartup  
jnxFEBSwitchover  
jnxFanFailure  
jnxFanOK  
jnxFruCheck  
jnxFruFailed  
jnxFruInsertion  
jnxFruOK  
jnxFruOffline  
jnxFruOnline  
jnxFruPowerOff  
jnxFruPowerOn  
jnxFruRemoval  
jnxHardDiskFailed  
jnxHardDiskMissing  
jnxJsAvPatternUpdateTrap  
jnxJsChassisClusterSwitchover  
jnxJsFwAuthCapacityExceeded  
jnxJsFwAuthFailure  
jnxJsFwAuthServiceDown  
jnxJsFwAuthServiceUp  
jnxJsNatAddrPoolThresholdStatus  
jnxJsScreenAttack  
jnxJsScreenCfgChange  
jnxLdpLspDown  
jnxLdpLspUp  
jnxLdpSesDown



jnxLdpSesUp  
jnxMIMstCistPortLoopProtectStateChangeTrap  
jnxMIMstCistPortRootProtectStateChangeTrap  
jnxMIMstErrTrap  
jnxMIMstGenTrap  
jnxMIMstInvalidBpduRxdTrap  
jnxMIMstMstiPortLoopProtectStateChangeTrap  
jnxMIMstMstiPortRootProtectStateChangeTrap  
jnxMIMstNewRootTrap  
jnxMIMstProtocolMigrationTrap  
jnxMIMstRegionConfigChangeTrap  
jnxMIMstTopologyChgTrap  
jnxMacChangedNotification  
jnxMplsLdpInitSesThresholdExceeded  
jnxMplsLdpPathVectorLimitMismatch  
jnxMplsLdpSessionDown  
jnxMplsLdpSessionUp  
jnxOspfV3IfConfigError  
jnxOspfV3IfRxBadPacket  
jnxOspfV3IfStateChange  
jnxOspfV3LsdbApproachingOverflow  
jnxOspfV3LsdbOverflow  
jnxOspfV3NbrRestartHelperStatusChange  
jnxOspfV3NbrStateChange  
jnxOspfV3NssaTranslatorStatusChange  
jnxOspfV3RestartStatusChange  
jnxOspfV3VirtIfConfigError  
jnxOspfV3VirtIfRxBadPacket  
jnxOspfV3VirtIfStateChange  
jnxOspfV3VirtNbrRestartHelperStatusChange  
jnxOspfV3VirtNbrStateChange  
jnxOtnAlarmCleared  
jnxOtnAlarmSet  
jnxOverTemperature  
jnxPMonOverloadCleared  
jnxPMonOverloadSet  
jnxPingEgressJitterThresholdExceeded  
jnxPingEgressStdDevThresholdExceeded  
jnxPingEgressThresholdExceeded  
jnxPingIngressJitterThresholdExceeded  
jnxPingIngressStdDevThresholdExceeded  
jnxPingIngressThresholdExceeded  
jnxPingRttJitterThresholdExceeded  
jnxPingRttStdDevThresholdExceeded  
jnxPingRttThresholdExceeded  
jnxPortBpduErrorStatusChangeTrap  
jnxPortLoopProtectStateChangeTrap  
jnxPortRootProtectStateChangeTrap  
jnxPowerSupplyFailure  
jnxPowerSupplyOK  
jnxRedundancySwitchover  
jnxRmonAlarmGetFailure  
jnxRmonGetOk  
jnxSecAccessIfMacLimitExceeded  
jnxSecAccessSdsRateLimitCrossed  
jnxSonetAlarmCleared  
jnxSonetAlarmSet  
jnxSpSvcSetCpuExceeded  
jnxSpSvcSetCpuOk  
jnxSpSvcSetZoneEntered  
jnxSpSvcSetZoneExited



jnxStormEventNotification  
jnxSyslogTrap  
jnxTemperatureOK  
jnxVccpPortDown  
jnxVccpPortUp  
jnxVpnIfDown  
jnxVpnIfUp  
jnxVpnPwDown  
jnxVpnPwUp  
jnx12aldGlobalMacLimit  
jnx12aldInterfaceMacLimit  
jnx12aldRoutingInstMacLimit  
linkDown  
linkUp  
lldpRemTablesChange  
mfrMibTrapBundleLinkMismatch  
mplsLspChange  
mplsLspDown  
mplsLspInfoChange  
mplsLspInfoDown  
mplsLspInfoPathDown  
mplsLspInfoPathUp  
mplsLspInfoUp  
mplsLspPathDown  
mplsLspPathUp  
mplsLspUp  
mplsNumVrfRouteMaxThreshExceeded  
mplsNumVrfRouteMidThreshExceeded  
mplsNumVrfSecIllgILblThrshExcd  
mplsTunnelDown  
mplsTunnelReoptimized  
mplsTunnelRerouted  
mplsTunnelUp  
mplsVrfIfDown  
mplsVrfIfUp  
mplsXCDown  
mplsXCUp  
msdpBackwardTransition  
msdpEstablished  
newRoot  
ospfIfAuthFailure  
ospfIfConfigError  
ospfIfRxBadPacket  
ospfIfStateChange  
ospfLsdbApproachingOverflow  
ospfLsdbOverflow  
ospfMaxAgeLsa  
ospfNbrStateChange  
ospfOriginateLsa  
ospfTxRetransmit  
ospfVirtIfAuthFailure  
ospfVirtIfConfigError  
ospfVirtIfRxBadPacket  
ospfVirtIfStateChange  
ospfVirtIfTxRetransmit  
ospfVirtNbrStateChange  
pethMainPowerUsageOffNotification  
pethMainPowerUsageOnNotification  
pethPsePortOnOffNotification  
pingProbeFailed  
pingTestCompleted



```

pingTestFailed
ptopoConfigChange
risingAlarm
rpMauJabberTrap
sd1cLSStatusChange
sd1cPortStatusChange
topologyChange
traceRoutePathChange
traceRouteTestCompleted
traceRouteTestFailed
vrrpTrapAuthFailure
vrrpTrapNewMaster
warmStart

```

request snmp  
spooof-trap (Question  
Mark ?)

```

user@host> request snmp spooof-trap ?
Possible completions:
<trap>          The name of the trap to spooof
adslAtucInitFailureTrap
adslAtucPerfESsThreshTrap
adslAtucPerfLofsThreshTrap
adslAtucPerfLolsThreshTrap
adslAtucPerfLossThreshTrap
adslAtucPerfLprsThreshTrap
adslAtucRateChangeTrap
adslAturPerfESsThreshTrap
adslAturPerfLofsThreshTrap
adslAturPerfLossThreshTrap
adslAturPerfLprsThreshTrap
adslAturRateChangeTrap
apsEventChannelMismatch
apsEventFEPLF
apsEventModeMismatch
apsEventPSBF
apsEventSwitchover
authenticationFailure
bfdSessDown
bfdSessUp
bgpBackwardTransition
bgpEstablished
coldStart
d1swTrapCircuitDown
d1swTrapCircuitUp
---(more 10%)---

```



## request snmp utility-mib clear instance

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>request snmp utility-mib clear instance <i>name</i></code><br><code>object-type <i>type</i></code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Command introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Clear the data stored in the specified container object in the SNMP Utility MIB.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <p><b><i>name</i></b>—Name of the SNMP instance that is used to identify the data stored in the container object.</p> <p><b><i>object-type type</i></b>—Type of container object in which the data is stored. The following container object types are supported:</p> <ul style="list-style-type: none"><li>• <b>counter</b>—Stores a 32-bit counter value.</li><li>• <b>counter64</b>—Stores a 64-bit counter value.</li><li>• <b>integer</b>—Stores a 32-bit signed integer value.</li><li>• <b>unsigned-integer</b>—Stores a 32-bit unsigned integer value.</li></ul> |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Juniper Networks Enterprise-Specific MIBs on page 5484</a></li><li>• <a href="#">Understanding the Implementation of SNMP on the QFabric System on page 5461</a></li><li>• <a href="#">request snmp utility-mib set instance on page 5769</a></li></ul>                                                                                                                                                                                                                                                              |



## request snmp utility-mib set instance

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | request snmp utility-mib set instance <i>name</i><br>object-type <i>type</i><br>object-value <i>value</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Command introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Store data in the specified container object in the SNMP Utility MIB. The data may be retrieved by SNMP operations.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                  | <p><b><i>name</i></b>—Name of the SNMP instance that is used to identify the data stored in the container object.</p> <p><b>object-type <i>type</i></b>—Type of container object in which to store data. The following container object types are supported:</p> <ul style="list-style-type: none"> <li>• <b>counter</b>—Stores a 32-bit counter value.</li> <li>• <b>counter64</b>—Stores a 64-bit counter value.</li> <li>• <b>integer</b>—Stores a 32-bit signed integer value.</li> <li>• <b>unsigned-integer</b>—Stores a 32-bit unsigned integer value.</li> <li>• <b>string</b>—Stores an octet string value.</li> </ul> <p><b>object-value <i>value</i></b>—Data that is stored in the container object.</p> |
| <b>Required Privilege Level</b> | request                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Juniper Networks Enterprise-Specific MIBs on page 5484</a></li> <li>• <a href="#">Understanding the Implementation of SNMP on the QFabric System on page 5461</a></li> <li>• <a href="#">request snmp utility-mib clear instance on page 5768</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                    |



## show oam fabric flow-specification

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show oam fabric flow-specification</code><br><code>&lt;flow-specification-name&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Command introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Display the fabric flow specifications that are configured in a QFabric system Node group.                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <i>flow-specification-name</i> —(Optional) Name of a flow specification.                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Overview of Internal Fabric Monitoring on page 5451</a></li> <li>• <a href="#">Configuring a Fabric Maintenance Association on page 5527</a></li> <li>• <a href="#">Configuring Flow Specifications on page 5528</a></li> <li>• <a href="#">fabric (OAM) on page 5599</a></li> <li>• <a href="#">ping fabric multicast-flow on page 5757</a></li> <li>• <a href="#">ping fabric unicast-flow on page 5759</a></li> <li>• <a href="#">traceroute fabric unicast-flow on page 5806</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show oam fabric flow-specification (All) on page 5772</a><br><a href="#">show oam fabric flow-specification (Flow Specification Specified) on page 5772</a>                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Output Fields</b>            | <a href="#">Table 507 on page 5770</a> lists the output fields for the <b>show oam fabric flow-specification</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                    |

**Table 507: show oam fabric flow-specification Output Fields**

| Field Name              | Field Description                                                                                                                                                                |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Flow specification name | Name of the flow specification.                                                                                                                                                  |
| Type                    | Flow specification type: <ul style="list-style-type: none"> <li>• Ethernet</li> <li>• Ethernet Unicast IPV4</li> <li>• Multicast IPV4</li> <li>• Multicast VLAN flood</li> </ul> |
| Ethernet frame size     | Ethernet frame size in bytes.                                                                                                                                                    |
| Ether type              | EtherType protocol.                                                                                                                                                              |
| Source-MAC              | MAC address of the source FMEP interface.                                                                                                                                        |



Table 507: show oam fabric flow-specification Output Fields (*continued*)

| Field Name                     | Field Description                                   |
|--------------------------------|-----------------------------------------------------|
| Source-MAC Mask                | MAC address mask of the source FMEP interface.      |
| Destination-MAC                | MAC address of the destination FMEP interface.      |
| Destination-MAC Mask           | MAC address mask of the destination FMEP interface. |
| Source-IP                      | IP address of the source FMEP interface.            |
| Source-IP Mask                 | IP address mask of the source FMEP interface.       |
| Destination-IP                 | IP address of the destination FMEP interface.       |
| Destination-IP mask            | IP address mask of the destination FMEP interface.  |
| IP-Protocol                    | IPv4 protocol configured.                           |
| Source-L4-Port                 | Source TCP or UDP port.                             |
| Destination-L4-Port            | Destination TCP or UDP port.                        |
| Destination multicast group IP | IP address of the destination multicast group.      |



## Sample Output

show oam fabric  
flow-specification (All)

```
user@host> show oam fabric flow-specification

Flow specification name : fspec1 Type : Ethernet
  Ethernet frame size : Unspecified
  Ether type : Unspecified
  Source-MAC : Unspecified
  Source-MAC Mask : Unspecified
  Destination-MAC : Unspecified
  Destination-MAC Mask : Unspecified
Flow specification name : fspec2 Type : Ethernet
  Ethernet frame size : Unspecified
  Ether type : 1792
  Source-MAC : 0:0:a0:f0:cc:22
  Source-MAC Mask : Unspecified
  Destination-MAC : 0:11:22:33:a0:e2
  Destination-MAC Mask : Unspecified
Flow specification name : fspec3 Type : Ethernet Unicast IPv4
  Ethernet frame size : Unspecified
  Source-IP : 121.0.0.1
  Source-IP Mask : Unspecified
  Destination-IP : 132.1.0.1
  Destination-IP Mask : Unspecified
  Destination-mac : Unspecified
  IP-protocol : TCP
  Source-L4-port : 270
  Destination-L4-port : Unspecified
Flow specification name : fspec4 Type : Multicast IPv4
  Ethernet frame size : Unspecified
  Source IP : 100.0.0.23
  Destination multicast group IP: 225.0.0.1
Flow specification name : fspec5 Type : Multicast VLAN flood
  Ethernet frame size : Unspecified
```

show oam fabric  
flow-specification  
(Flow Specification  
Specified)

```
user@host> show oam fabric flow-specification fspec3

Flow specification name : fspec3 Type : Ethernet Unicast IPv4
  Ethernet frame size : Unspecified
  Source-IP : 121.0.0.1
  Source-IP Mask : Unspecified
  Destination-IP : 132.1.0.1
  Destination-IP Mask : Unspecified
  Destination-mac : Unspecified
  IP-protocol : TCP
  Source-L4-port : 270
  Destination-L4-port : Unspecified
```



## show oam fabric interfaces

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>show oam fabric interfaces &lt;interface-name&gt; &lt;fabric-maintenance-association fma-name&gt; &lt;brief&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Command introduced in Junos OS Release 12.2 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | <p>Display the fabric maintenance associations (FMAs) and fabric maintenance endpoints (FMEPs) that are configured in a QFabric system Node group.</p> <p>If you do not specify an interface, display information for an FMA (if one is specified) or all FMAs configured in the Node group.</p>                                                                                                                                                                                                                                                     |
| <b>Options</b>                  | <p><b>brief</b>—(Optional) Summarized version of the output.</p> <p><b>fabric-maintenance-association <i>fma-name</i></b>—(Optional) Name of a specific FMA.</p> <p><b>interface-name</b>—(Optional) Name of a specific interface.</p>                                                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Overview of Internal Fabric Monitoring on page 5451</a></li> <li>• <a href="#">Configuring a Fabric Maintenance Association on page 5527</a></li> <li>• <a href="#">Configuring Flow Specifications on page 5528</a></li> <li>• <a href="#">fabric (OAM) on page 5599</a></li> <li>• <a href="#">ping fabric multicast-flow on page 5757</a></li> <li>• <a href="#">ping fabric unicast-flow on page 5759</a></li> <li>• <a href="#">traceroute fabric unicast-flow on page 5806</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show oam fabric interfaces on page 5774</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Output Fields</b>            | <p><a href="#">Table 508 on page 5773</a> lists the output fields for the <b>show oam fabric interfaces</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                                                                                                                                                                                     |

**Table 508: show oam fabric interfaces Output Fields**

| Field Name                     | Field Description                   |
|--------------------------------|-------------------------------------|
| Interface-name                 | Name of the interface.              |
| Fabric-Maintenance Association | FMA name.                           |
| VLAN                           | VLAN name.                          |
| Interface state                | State of the interface: Up or down. |



Table 508: show oam fabric interfaces Output Fields (*continued*)

| Field Name     | Field Description |
|----------------|-------------------|
| MEP Identifier | FMEP identifier.  |
| MEP Name       | FMEP name.        |

## Sample Output

**show oam fabric  
interfaces**

user@host> **show oam fabric interfaces**

| Interface-name        | Fabric-Maintenance<br>Association | VLAN | Interface<br>state | MEP<br>Identifier | MEP<br>Name |
|-----------------------|-----------------------------------|------|--------------------|-------------------|-------------|
| ED1479:NULL           | fma-default                       | *    | up                 | 32774             |             |
| fmeop-default-ED1479  |                                   |      |                    |                   |             |
| ED1494:NULL           | fma-default                       | *    | up                 | 32773             |             |
| fmeop-default-ED1494  |                                   |      |                    |                   |             |
| ED1494:xe-0/0/7.0     | fma1                              | v100 | up                 | 1                 |             |
| ED1497:NULL           | fma-default                       | *    | up                 | 32775             |             |
| fmeop-default-ED1497  |                                   |      |                    |                   |             |
| ED1497:xe-0/0/8.0     | fma1                              | v100 | up                 | 2                 |             |
| P3613-C:NULL          | fma-default                       | *    | up                 | 32777             |             |
| fmeop-default-P3613-C |                                   |      |                    |                   |             |



## show log

---

|                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                     | show log<br><filename   user <username>>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Syntax (QFabric System)</b>    | show log <filename>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Syntax (TX Matrix Routers)</b> | show log<br><all-lcc   lcc <i>number</i>   scc><br><filename   user <username>>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>                | List log files, display log file contents, or display information about users who have logged in to the router or switch.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                    | <p><b>none</b>—List all log files.</p> <p><b>&lt;all-lcc   lcc <i>number</i>   scc&gt;</b>—(TX Matrix routers only) (Optional) Display logging information about all T640 routers (or line-card chassis) or a specific T640 router (replace <i>number</i> with a value from <b>0</b> through <b>3</b>) connected to a TX Matrix router. Or, display logging information about the TX Matrix router (or switch-card chassis).</p> <p><b>filename</b>—(Optional) Display the log messages in the specified log file. For the routing matrix, the filename must include the chassis information.</p> <p><b>user &lt;username&gt;</b>—(Optional) Display logging information about users who have recently logged in to the router or switch. If you include <i>username</i>, display logging information about the specified user.</p> |
| <b>Required Privilege Level</b>   | trace                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>List of Sample Output</b>      | <a href="#">show log on page 5776</a><br><a href="#">show log filename on page 5776</a><br><a href="#">show log filename (QFabric System) on page 5776</a><br><a href="#">show log user on page 5777</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |



## Sample Output

### show log

```
user@host> show log
total 57518
-rw-r--r-- 1 root bin      211663 Oct  1 19:44 dcd
-rw-r--r-- 1 root bin      999947 Oct  1 19:41 dcd.0
-rw-r--r-- 1 root bin      999994 Oct  1 17:48 dcd.1
-rw-r--r-- 1 root bin      238815 Oct  1 19:44 rpd
-rw-r--r-- 1 root bin     1049098 Oct  1 18:00 rpd.0
-rw-r--r-- 1 root bin     1061095 Oct  1 12:13 rpd.1
-rw-r--r-- 1 root bin     1052026 Oct  1 06:08 rpd.2
-rw-r--r-- 1 root bin     1056309 Sep 30 18:21 rpd.3
-rw-r--r-- 1 root bin     1056371 Sep 30 14:36 rpd.4
-rw-r--r-- 1 root bin     1056301 Sep 30 10:50 rpd.5
-rw-r--r-- 1 root bin     1056350 Sep 30 07:04 rpd.6
-rw-r--r-- 1 root bin     1048876 Sep 30 03:21 rpd.7
-rw-rw-r-- 1 root bin       19656 Oct  1 19:37 wtmp
```

### show log filename

```
user@host> show log rpd
Oct  1 18:00:18 trace_on: Tracing to ?/var/log/rpd? started
Oct  1 18:00:18 EVENT <MTU> ds-5/2/0.0 index 24 <Broadcast PointToPoint Multicast
Oct  1 18:00:18
Oct  1 18:00:19 KRT rcv len 56 V9 seq 148 op add Type route/if af 2 addr
13.13.13.21 nhop type local nhop 13.13.13.21
Oct  1 18:00:19 KRT rcv len 56 V9 seq 149 op add Type route/if af 2 addr
13.13.13.22 nhop type unicast nhop 13.13.13.22
Oct  1 18:00:19 KRT rcv len 48 V9 seq 150 op add Type ifaddr index 24 devindex
43
Oct  1 18:00:19 KRT rcv len 144 V9 seq 151 op chnge Type ifdev devindex 44
Oct  1 18:00:19 KRT rcv len 144 V9 seq 152 op chnge Type ifdev devindex 45
Oct  1 18:00:19 KRT rcv len 144 V9 seq 153 op chnge Type ifdev devindex 46
Oct  1 18:00:19 KRT rcv len 1272 V9 seq 154 op chnge Type ifdev devindex 47
...
```

### show log filename (QFabric System)

```
user@qfabric> show log messages
Mar 28 18:00:06 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:06 ED1486
chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 1, jnxFruL3Index 0,
jnxFruName PIC: 48x 10G-SFP+ @ 0/0/*, jnxFruType 11, jnxFruSlot 0,
jnxFruOfflineReason 2, jnxFruLastPowerOff 0, jnxFruLastPowerOn 2159)
Mar 28 18:00:07 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:07 ED1486
chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 2, jnxFruL3Index 0,
jnxFruName PIC: @ 0/1/*, jnxFruType 11, jnxFruSlot 0, jnxFruOfflineReason 2,
jnxFruLastPowerOff 0, jnxFruLastPowerOn 2191)
Mar 28 18:00:07 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:07 ED1492
chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 1, jnxFruL3Index 0,
jnxFruName PIC: 48x 10G-SFP+ @ 0/0/*, jnxFruType 11, jnxFruSlot 0,
jnxFruOfflineReason 2, jnxFruLastPowerOff 0, jnxFruLastPowerOn 242726)
Mar 28 18:00:07 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:07 ED1492
chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 2, jnxFruL3Index 0,
jnxFruName PIC: @ 0/1/*, jnxFruType 11, jnxFruSlot 0, jnxFruOfflineReason 2,
jnxFruLastPowerOff 0, jnxFruLastPowerOn 242757)
Mar 28 18:00:16 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:16 ED1486
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:00:27 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:27 ED1486
```



```

file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:00:50 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:50
_DCF_default__NW-INE-0_RE0_ file: UI_COMMIT: User 'root' requested 'commit'
operation (comment: none)
Mar 28 18:00:50 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:50
_DCF_default__NW-INE-0_RE0_ file: UI_COMMIT: User 'root' requested 'commit'
operation (comment: none)
Mar 28 18:00:55 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:55 ED1492
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:01:10 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:01:10 ED1492
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:02:37 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:02:37 ED1491
chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 1, jnxFruL3Index 0,
jnxFruName PIC: 48x 10G-SFP+ @ 0/0/*, jnxFruType 11, jnxFruSlot 0,
jnxFruOfflineReason 2, jnxFruLastPowerOff 0, jnxFruLastPowerOn 33809)

```

### show log user

```

user@host> show log user
darius  mg2546                Thu Oct  1 19:37   still logged in
darius  mg2529                Thu Oct  1 19:08 - 19:36   (00:28)
darius  mg2518                Thu Oct  1 18:53 - 18:58   (00:04)
root    mg1575                Wed Sep 30 18:39 - 18:41   (00:02)
root    tty2      jun.site.per  Wed Sep 30 18:39 - 18:41   (00:02)
alex    tty1      192.168.1.2  Wed Sep 30 01:03 - 01:22   (00:19)

```



## show sflow

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show sflow<br><collector><br><interface>                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | Display sFlow configuration information.                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b>none</b>—Display all sFlow configuration information.</p> <p><b>collector</b>—(Optional) Display a list of configured sFlow collectors and their properties.</p> <p><b>interface</b>—(Optional) Display the interfaces on which sFlow technology is enabled and the sampling parameters.</p>                                                                                                                  |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show sflow interface on page 5781</a></li> <li>• <a href="#">show sflow collector on page 5780</a></li> <li>• <a href="#">clear sflow collector statistics on page 5739</a></li> <li>• <a href="#">Example: Monitoring Network Traffic Using sFlow Technology on page 5514</a></li> <li>• <a href="#">Configuring sFlow Technology on page 5532</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show sflow on page 5779</a>                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Output Fields</b>            | <a href="#">Table 509 on page 5778</a> lists the output fields for the <b>show sflow</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                           |

**Table 509: show sflow Output Fields**

| Field Name          | Field Description                                                                                                  | Level of Output |
|---------------------|--------------------------------------------------------------------------------------------------------------------|-----------------|
| sFlow               | Status of the feature: <b>Enabled</b> or <b>Disabled</b> .                                                         | All levels      |
| Sample limit        | Number of packets sampled per second. This sample limit cannot be configured and is set to 300 packets per second. | All levels      |
| Polling interval    | Interval at which the sFlow agent polls the interface.                                                             | All levels      |
| Sample rate egress  | Rate at which egress packets are sampled.                                                                          | All levels      |
| Sample rate ingress | Rate at which ingress packets are sampled.                                                                         | All levels      |
| Agent ID            | IP address assigned to the sFlow agent.                                                                            | All levels      |
| Source IP address   | Source IP address for the sFlow packets.                                                                           | All levels      |



## Sample Output

```
show sflow                user@host> show sflow

sFlow                      : Enabled
Sample limit               : 300 packets/second
Polling interval          : 20 second
Sample rate egress         : 1:2048: Disabled
Sample rate ingress        : 1:1000: Enabled
Agent ID                   : 10.93.54.7
Source IP address          : 10.93.54.7
```



## show sflow collector

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show sflow collector                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Display a list of configured sFlow collectors and their properties.                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">clear sflow collector statistics on page 5739</a></li> <li>• <a href="#">show sflow on page 5778</a></li> <li>• <a href="#">show sflow interface on page 5781</a></li> <li>• <a href="#">Example: Monitoring Network Traffic Using sFlow Technology on page 5514</a></li> <li>• <a href="#">Configuring sFlow Technology on page 5532</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show sflow collector on page 5780</a>                                                                                                                                                                                                                                                                                                                                                         |
| <b>Output Fields</b>            | <a href="#">Table 510 on page 5780</a> lists the output fields for the <b>show sflow collector</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                       |

Table 510: show sflow collector Output Fields

| Field Name        | Field Description                 | Level of Output |
|-------------------|-----------------------------------|-----------------|
| Collector address | IP address of the collector.      | All levels      |
| UDP-Port          | UDP port number of the collector. | All levels      |
| No. of samples    | Number of samples collected.      | All levels      |

## Sample Output

```

show sflow collector      user@host> show sflow collector

Collector      Udp-port      No. of samples
address
10.204.32.46    6343          1000
100.204.32.76   3400          1000

```



## show sflow interface

|                                 |                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show sflow interface                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | Display the interfaces on which sFlow is enabled and the sampling parameters for the interface.                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show sflow on page 5778</a></li> <li>• <a href="#">show sflow collector on page 5780</a></li> <li>• <a href="#">Example: Monitoring Network Traffic Using sFlow Technology on page 5514</a></li> <li>• <a href="#">Configuring sFlow Technology on page 5532</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show sflow interface (QFX3500 Switch in Standalone Mode) on page 5782</a><br><a href="#">show sflow interface (QFabric System) on page 5782</a>                                                                                                                                                                      |
| <b>Output Fields</b>            | <a href="#">Table 511 on page 5781</a> lists the output fields for the <b>show sflow interface</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                              |

**Table 511: show sflow interface Output Fields**

| Field Name                  | Field Description                                      | Level of Output |
|-----------------------------|--------------------------------------------------------|-----------------|
| Interface                   | Interface on which sFlow technology is enabled.        | All levels      |
| Status Egress               | Indicates whether an egress sample rate is enabled.    | All levels      |
| Status Ingress              | Indicates whether an ingress sample rate is enabled.   | All levels      |
| Sample rate Egress          | Rate at which egress packets are sampled.              | All levels      |
| Sample rate Ingress         | Rate at which ingress packets are sampled.             | All levels      |
| Adapted sample rate Egress  | Adapted rate at which egress packets are sampled.      | All levels      |
| Adapted sample rate Ingress | Adapted rate at which ingress packets are sampled.     | All levels      |
| Polling-interval            | Interval at which the sFlow agent polls the interface. | All levels      |



## Sample Output

**show sflow interface**  
(QFX3500 Switch in  
Standalone Mode)

```
user@host> show sflow interface
Interface  Status      Sample rate      Adapted sample rate  Polling-interval
          Egress Ingress  Egress Ingress  Egress Ingress
xe-0/0/0.0  Enabled Disabled  1000    2048    1000    2048
xe-1/0/1.0  Enabled Disabled  1000    2048    1000    2048
   20
   20
```

## Sample Output

**show sflow interface**  
(QFabric System)

```
user@host> show sflow interface
Interface  Status      Sample rate      Adapted sample rate  Polling-interval
          Egress Ingress  Egress Ingress  Egress Ingress
node1:xe-0/0/0.0  Enabled Disabled  1000    2048    1000    2048
20
node2:xe-1/0/1.0  Enabled Disabled  1000    2048    1000    2048
20
node4:xe-1/0/0.0  Enabled Disabled  1000    2048    1000    2048
20
```



## show snmp health-monitor

|                                 |                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show snmp health-monitor<br><alarms (brief   detail)   logs>                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | Display information about Simple Network Management Protocol (SNMP) health monitor alarms and logs.                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <p><b>none</b>—Display information about all health monitor alarms and logs.</p> <p><b>alarms (brief   detail)</b>—(Optional) Display information about health monitor alarms. Optionally, specify brief or detailed information about the alarms.</p> <p><b>logs</b>—(Optional) Display information about health monitor logs.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                |
| <b>List of Sample Output</b>    | <a href="#">show snmp health-monitor on page 5786</a><br><a href="#">show snmp health-monitor alarms detail on page 5786</a>                                                                                                                                                                                                        |
| <b>Output Fields</b>            | <a href="#">Table 512 on page 5783</a> describes the output fields for the <b>show snmp health-monitor</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                         |

**Table 512: show snmp health-monitor Output Fields**

| Field Name                  | Field Description                                                           | Level of Output |
|-----------------------------|-----------------------------------------------------------------------------|-----------------|
| <b>Alarm Index</b>          | Alarm identifier.                                                           | All levels      |
| <b>Variable description</b> | Description of the health monitor object instance being monitored.          | All levels      |
| <b>Variable name</b>        | Name of the health monitor object instance being monitored.                 | All levels      |
| <b>Value</b>                | Current value of the monitored variable in the most recent sample interval. | All levels      |



Table 512: show snmp health-monitor Output Fields (*continued*)

| Field Name              | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Level of Output |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>State</b>            | <p>State of the alarm or event entry:</p> <ul style="list-style-type: none"> <li>Alarms: <ul style="list-style-type: none"> <li><b>active</b>—Entry is fully configured and activated.</li> <li><b>falling threshold crossed</b>—Value of the variable has crossed the lower threshold limit.</li> <li><b>rising threshold crossed</b>—Value of the variable has crossed the upper threshold limit.</li> <li><b>under creation</b>—Entry is being configured and is not yet activated.</li> <li><b>startup</b>—Alarm is waiting for the first sample of the monitored variable.</li> <li><b>object not available</b>—Monitored variable of that type is not available to the health monitor agent.</li> <li><b>instance not available</b>—Monitored variable's instance is not available to the health monitor agent.</li> <li><b>object type invalid</b>—Monitored variable is not a numeric value.</li> <li><b>object processing errored</b>—An error occurred when the monitored variable was processed.</li> <li><b>unknown</b>—State is not one of the above.</li> </ul> </li> </ul> | All levels      |
| <b>Variable OID</b>     | Object ID to which the variable name is resolved. The format is x.x.x.x.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | detail          |
| <b>Sample type</b>      | Method of sampling the monitored variable and calculating the value to compare against the upper and lower thresholds. It can have the value <b>absolute value</b> or <b>delta value</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | detail          |
| <b>Startup alarm</b>    | <p>Alarm that might be sent when this entry is first activated, depending on the following criteria:</p> <ul style="list-style-type: none"> <li>Alarm is sent when one of the following situations exists: <ul style="list-style-type: none"> <li>Value of the alarm is above or equal to the rising threshold and the startup type is either <b>rising alarm</b> or <b>rising or falling alarm</b>.</li> <li>Value of the alarm is below or equal to the falling threshold and the startup type is either <b>falling alarm</b> or <b>rising or falling alarm</b>.</li> </ul> </li> <li>Alarm is <i>not</i> sent when one of the following situations exists: <ul style="list-style-type: none"> <li>Value of the alarm is above or equal to the rising threshold and the startup type is <b>falling alarm</b>.</li> <li>Value of the alarm is below or equal to the falling threshold and the startup type is <b>rising alarm</b>.</li> <li>Value of the alarm is between the thresholds.</li> </ul> </li> </ul>                                                                         | detail          |
| <b>Owner</b>            | Name of the entry configured by the user. If the entry was created through the CLI, the owner has <b>monitor</b> prepended to it.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | detail          |
| <b>Creator</b>          | Mechanism by which the entry was configured ( <b>Health Monitor</b> ).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | detail          |
| <b>Sample interval</b>  | Time period between samples (in seconds).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | detail          |
| <b>Rising threshold</b> | Upper limit threshold value as a percentage of the maximum possible value.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | detail          |



Table 512: show snmp health-monitor Output Fields (*continued*)

| Field Name                 | Field Description                                                                                                                                                               | Level of Output |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Falling threshold</b>   | Lower limit threshold value as a percentage of the maximum possible value.                                                                                                      | <b>detail</b>   |
| <b>Rising event index</b>  | Index number of the event triggered when the rising threshold is crossed.                                                                                                       | <b>detail</b>   |
| <b>Falling event index</b> | Index number of the event triggered when the falling threshold is crossed. Details include the value of the falling event instance and the state of the falling event instance. | <b>detail</b>   |



## Sample Output

### show snmp health-monitor

```
user@switch> show snmp health-monitor

Alarm
Index  Variable description                               Value State

32768 Health Monitor: root file system utilization
      jnxHrStoragePercentUsed.1                          59 active

32769 Health Monitor: /config file system utilization
      jnxHrStoragePercentUsed.2                          0 active

32770 Health Monitor: RE 0 CPU utilization
      jnxOperatingCPU.9.1.0.0                            9 falling threshold

32772 Health Monitor: RE 0 memory utilization
      jnxOperatingBuffer.9.1.0.0                         23 active

32774 Health Monitor: Max Kernel Memory Used (%)
      jnxBoxKernelMemoryUsedPercent.0                    3 active
Event Index: 32768
Description: Health Monitor: RE 0 CPU utilization crossed falling threshold
70 (value: 5), (variable: jnxOperatingCPU.9.1.0.0)
Time: 2011-01-09 19:18:35 PST
```

### show snmp health-monitor alarms detail

```
user@switch> show snmp health-monitor alarms detail

Alarm Index 32768:
Variable name      jnxHrStoragePercentUsed.1
Variable OID       1.3.6.1.4.1.2636.3.31.1.1.1.1.1
Sample type        absolute value
Startup alarm      rising alarm
Owner              Health Monitor: root file system
                  utilization
Creator            Health Monitor
State              active
Sample interval    300 seconds
Rising threshold   80
Falling threshold  70
Rising event index 32768
Falling event index 32768
Instance Value: 59
Instance State: active

Alarm Index 32769:
Variable name      jnxHrStoragePercentUsed.2
Variable OID       1.3.6.1.4.1.2636.3.31.1.1.1.1.2
Sample type        absolute value
Startup alarm      rising alarm
Owner              Health Monitor: /config file system
                  utilization
Creator            Health Monitor
State              active
Sample interval    300 seconds
```



```

Rising threshold          80
Falling threshold        70
Rising event index       32768
Falling event index      32768
  Instance Value: 0
  Instance State: active

```

## Alarm Index 32770:

```

Variable name             jnxOperatingCPU.9.1.0.0
Variable OID             1.3.6.1.4.1.2636.3.1.13.1.8.9.1.0.0
Sample type              absolute value
Startup alarm            rising alarm
Owner                   Health Monitor: RE 0 CPU utilization

```

```

Creator                 Health Monitor
State                  active
Sample interval         300 seconds
Rising threshold        80
Falling threshold       70
Rising event index      32768
Falling event index     32768
  Instance Value: 9
  Instance State: falling threshold

```

## Alarm Index 32772:

```

Variable name             jnxOperatingBuffer.9.1.0.0
Variable OID             1.3.6.1.4.1.2636.3.1.13.1.11.9.1.0.0
Sample type              absolute value
Startup alarm            rising alarm
Owner                   Health Monitor: RE 0 memory utilization

```

```

Creator                 Health Monitor
State                  active
Sample interval         300 seconds
Rising threshold        80
Falling threshold       70
Rising event index      32768
Falling event index     32768
  Instance Value: 23
  Instance State: active

```

## Alarm Index 32774:

```

Variable name             jnxBoxKernelMemoryUsedPercent.0
Variable OID             1.3.6.1.4.1.2636.3.1.16.0
Sample type              absolute value
Startup alarm            rising alarm
Owner                   Health Monitor: Max Kernel Memory Used (%)

```

```

Creator                 Health Monitor
State                  active
Sample interval         300 seconds
Rising threshold        80
Falling threshold       70
Rising event index      32768
Falling event index     32768
  Instance Value: 3
  Instance State: active

```



## show snmp inform-statistics

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show snmp inform-statistics                                                                                                                                                                    |
| <b>Release Information</b>      | Command introduced in Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.           |
| <b>Description</b>              | Display information about Simple Network Management Protocol (SNMP) inform requests.                                                                                                           |
| <b>Options</b>                  | This command has no options.                                                                                                                                                                   |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                           |
| <b>List of Sample Output</b>    | <a href="#">show snmp inform-statistics on page 5789</a>                                                                                                                                       |
| <b>Output Fields</b>            | <a href="#">Table 513 on page 5788</a> describes the output fields for the <b>show snmp inform-statistics</b> command. Output fields are listed in the approximate order in which they appear. |

**Table 513: show snmp inform-statistics Output Fields**

| Field Name            | Field Description                                                                                                                                  |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Target Name</b>    | Name of the device configured to receive and respond to SNMP informs.                                                                              |
| <b>Address</b>        | IP address of the target device.                                                                                                                   |
| <b>Sent</b>           | Number of informs sent to the target device and acknowledged by the target device.                                                                 |
| <b>Pending</b>        | Number of informs held in memory pending a response from the target device.                                                                        |
| <b>Discarded</b>      | Number of informs discarded after the specified number of retransmissions to the target device were attempted.                                     |
| <b>Timeouts</b>       | Number of informs that did not receive an acknowledgement from the target device within the timeout specified.                                     |
| <b>Probe Failures</b> | Connection failures that occurred (for example, when the target server returned invalid content or you incorrectly configured the target address). |



## Sample Output

`show snmp`  
`inform-statistics`

```
user@host> show snmp inform-statistics
Inform Request Statistics:
Target Name: TA1_v3_md5_none Address: 172.17.20.184
Sent: 176, Pending: 0
Discarded: 0, Timeouts: 0, Probe Failures: 0
Target Name: TA2_v3_sha_none Address: 192.168.110.59
Sent: 0, Pending: 4
Discarded: 84, Timeouts: 0, Probe Failures: 258
Target Name: TA5_v2_none Address: 172.17.20.184
Sent: 0, Pending: 0
Discarded: 2, Timeouts: 10, Probe Failures: 0
```



## show snmp mib

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show snmp mib (get   get-next   walk) (ascii   decimal) <i>object-id</i></code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>ascii</b> and <b>decimal</b> options introduced in Junos OS Release 9.6.</p> <p><b>ascii</b> and <b>decimal</b> options introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | Display local Simple Network Management Protocol (SNMP) Management Information Base (MIB) object values.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <p><b>get</b>—Retrieve and display one or more SNMP object values.</p> <p><b>get-next</b>—Retrieve and display the next SNMP object values.</p> <p><b>walk</b>—Retrieve and display the SNMP object values that are associated with the requested object identifier (OID). When you use this option, the Junos OS displays the objects below the subtree that you specify.</p> <p><b>ascii</b>—Display the SNMP object's string indices as an ASCII-key representation.</p> <p><b>decimal</b>—Display the SNMP object values in the decimal (default) format. The <b>decimal</b> option is the default option for this command. Therefore, issuing the <b>show snmp mib (get   get-next   walk) decimal object-id</b> and the <b>show snmp mib (get   get-next   walk) object-id</b> commands display the same output.</p> <p><b>object-id</b>—The object can be represented by a sequence of dotted integers (such as 1.3.6.1.2.1.2) or by its subtree name (such as <b>interfaces</b>). When entering multiple objects, enclose the objects in quotation marks.</p> |
| <b>Required Privilege Level</b> | snmp—To view this statement in the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>List of Sample Output</b>    | <p><a href="#">show snmp mib get on page 5792</a></p> <p><a href="#">show snmp mib get (Multiple Objects) on page 5792</a></p> <p><a href="#">show snmp mib get (Layer 2 Policer) on page 5792</a></p> <p><a href="#">show snmp mib get-next on page 5792</a></p> <p><a href="#">show snmp mib get-next (Specify an OID) on page 5792</a></p> <p><a href="#">show snmp mib walk on page 5792</a></p> <p><a href="#">show snmp mib walk (QFX Series) on page 5792</a></p> <p><a href="#">show snmp mib walk decimal on page 5792</a></p> <p><a href="#">show snmp mib walk (ASCII) on page 5792</a></p> <p><a href="#">show snmp mib walk (Multiple Indices) on page 5792</a></p> <p><a href="#">show snmp mib walk decimal (Multiple Indices) on page 5793</a></p>                                                                                                                                                                                                                                                                                                    |
| <b>Output Fields</b>            | <p>Table 514 on page 5791 describes the output fields for the <b>show snmp mib</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |



Table 514: show snmp mib Output Fields

| Field Name          | Field Description                                                               |
|---------------------|---------------------------------------------------------------------------------|
| <i>name</i>         | Object name and numeric instance value.                                         |
| <i>object value</i> | Object value. The Junos OS translates OIDs into the corresponding object names. |



## Sample Output

|                                                      |                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>show snmp mib get</code>                       | <pre>user@host&gt; show snmp mib get sysObjectID.0 sysObjectID.0 = jnxProductNameM20</pre>                                                                                                                                                                                                                                                                                      |
| <code>show snmp mib get (Multiple Objects)</code>    | <pre>user@host&gt; show snmp mib get ?sysObjectID.0 sysUpTime.0? sysObjectID.0 = jnxProductNameM20 sysUpTime.0 = 1640992</pre>                                                                                                                                                                                                                                                  |
| <code>show snmp mib get (Layer 2 Policer)</code>     | <pre>user@host&gt; show snmp mib get ifInOctets.25970 ifInOctets.25970 = 7545720</pre>                                                                                                                                                                                                                                                                                          |
| <code>show snmp mib get-next</code>                  | <pre>user@host&gt; show snmp mib get-next jnxMibs jnxBoxClass.0 = jnxProductLineM20.0</pre>                                                                                                                                                                                                                                                                                     |
| <code>show snmp mib get-next (Specify an OID)</code> | <pre>user@host&gt; show snmp mib get-next 1.3.6.1 sysDescr.0 = Juniper Networks, Inc. m20 internet router, kernel Junos OS Release: 2004-1 Build date: build date UTC Copyright (c) 1996-2004 Juniper Networks, Inc.</pre>                                                                                                                                                      |
| <code>show snmp mib walk</code>                      | <pre>user@host&gt; show snmp mib walk system sysDescr.0 = Juniper Networks, Inc. m20 internet router, kernel Junos OS Release #0: 2004-1 Build date: build date UTC Copyright (c) 1996-2004 Juniper Networks, Inc. sysObjectID.0 = jnxProductNameM20 sysUpTime.0 = 1640992 sysContact.0 = Your contact sysName.0 = my router sysLocation.0 = building 1 sysServices.0 = 4</pre> |
| <code>show snmp mib walk (QFX Series)</code>         | <pre>user@switch&gt; show snmp mib walk system sysDescr.0 = Juniper Networks, Inc. qfx3500s internet router, kernel JUNOS 11.1-20100926.0 #0: 2010-09-26 06:17:38 UTC Build date: 2010-09-26 06:00:10 sysObjectID.0 = jnxProductQFX3500 sysUpTime.0 = 138980301 sysContact.0 = System Contact sysName.0 = LabQFX3500 sysLocation.0 = Lab sysServices.0 = 4</pre>                |
| <code>show snmp mib walk decimal</code>              | <pre>user@host&gt; show snmp mib walk decimal jnxUtilData jnxUtilCounter32Value.102.114.101.100 = 100</pre>                                                                                                                                                                                                                                                                     |
| <code>show snmp mib walk (ASCII)</code>              | <pre>show snmp mib walk ascii jnxUtilData jnxUtilCounter32Value."fred" = 100</pre>                                                                                                                                                                                                                                                                                              |
| <code>show snmp mib walk (Multiple Indices)</code>   | <pre>show snmp mib walk ascii jnxFWCounterByteCount jnxFWCounterByteCount."fe-1/3/0.0-i"."CLASS_BE-fe-1/3/0.0-i".2 = 0 jnxFWCounterByteCount."fe-1/3/0.0-i"."CLASS_CC-fe-1/3/0.0-i".2 = 0 jnxFWCounterByteCount."fe-1/3/0.0-i"."CLASS_RT-fe-1/3/0.0-i".2 = 0</pre>                                                                                                              |



.....

**show snmp mib walk  
decimal (Multiple  
Indices)**

```
show snmp mib walk ascii jnxFWCounterByteCount
jnxFWCounterByteCount."fe-1/3/0.0-i"."CLASS_BE-fe-1/3/0.0-i".2 = 0
jnxFWCounterByteCount."fe-1/3/0.0-i"."CLASS_CC-fe-1/3/0.0-i".2 = 0
jnxFWCounterByteCount."fe-1/3/0.0-i"."CLASS_RT-fe-1/3/0.0-i".2 = 0
.....
```



## show snmp rmon

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show snmp rmon<br><alarms (brief   detail)><br><events (brief   detail)><br><logs>                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Display information about Simple Network Management Protocol (SNMP) Remote Monitoring (RMON) alarms, events, and logs.                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <p><b>none</b>—Display information about all RMON alarms and events.</p> <p><b>brief   detail</b>—(Optional) Display brief or detailed information about RMON alarms or events.</p> <p><b>alarms</b>—(Optional) Display information about RMON alarms.</p> <p><b>events</b>—(Optional) Display information about RMON events.</p> <p><b>logs</b>—(Optional) Display information about RMON monitoring logs.</p>                                                                                                                          |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li> <li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li> <li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li> <li>• <a href="#">Understanding RMON on page 5470</a></li> <li>• <a href="#">clear snmp statistics on page 5741</a></li> <li>• <a href="#">clear snmp history on page 5740</a></li> <li>• <a href="#">show snmp rmon history on page 5798</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show snmp rmon on page 5797</a><br><a href="#">show snmp rmon alarms detail on page 5797</a><br><a href="#">show snmp rmon events detail on page 5797</a><br><a href="#">show snmp rmon logs on page 5797</a>                                                                                                                                                                                                                                                                                                                |
| <b>Output Fields</b>            | <a href="#">Table 515 on page 5794</a> describes the output fields for the <b>show snmp rmon</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                        |

**Table 515: show snmp rmon Output Fields**

| Field Name  | Field Description | Level of Output |
|-------------|-------------------|-----------------|
| Alarm Index | Alarm identifier. | All levels      |



Table 515: show snmp rmon Output Fields (*continued*)

| Field Name           | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Level of Output |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>State</b>         | <p>State of the alarm or event entry:</p> <p>Alarms:</p> <ul style="list-style-type: none"> <li>• <b>active</b>—Entry is fully configured and activated.</li> <li>• <b>falling threshold crossed</b>—Value of the variable has crossed the lower threshold limit.</li> <li>• <b>rising threshold crossed</b>—Value of the variable has crossed the upper threshold limit.</li> <li>• <b>under creation</b>—Entry is being configured and is not yet activated.</li> <li>• <b>startup</b>—Alarm is waiting for the first sample of the monitored variable.</li> <li>• <b>object not available</b>—Monitored variable of that type is not available to the SNMP agent.</li> <li>• <b>instance not available</b>—Monitored variable's instance is not available to the SNMP agent.</li> <li>• <b>object type invalid</b>—Monitored variable is not a numeric value.</li> <li>• <b>object processing errored</b>—An error occurred when the monitored variable was processed.</li> <li>• <b>unknown</b>—State is not one of the above.</li> </ul> <p>Events:</p> <ul style="list-style-type: none"> <li>• <b>active</b>—Entry has been fully configured and activated.</li> <li>• <b>under creation</b>—Entry is being configured and is not yet activated.</li> <li>• <b>unknown</b>—State is not one of the above.</li> </ul> | All levels      |
| <b>Variable name</b> | Name of the SNMP object instance being monitored.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | All levels      |
| <b>Event Index</b>   | Event identifier.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | All levels      |
| <b>Type</b>          | <p>Type of notification made when an event is triggered. It can be one of the following:</p> <ul style="list-style-type: none"> <li>• <b>log</b>—A system log message is generated and an entry is made to the log table.</li> <li>• <b>snmptrap</b>—An SNMP trap is sent to the configured destination.</li> <li>• <b>log and trap</b>—A system log message is generated, an entry is made to the log table, and an SNMP trap is sent to the configured destination.</li> <li>• <b>none</b>—Neither log nor trap will be sent.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>detail</b>   |
| <b>Last Event</b>    | Date and time of the last event. It has the format <i>yyyy-mm-dd hh:mm:ss timezone</i> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>brief</b>    |
| <b>Community</b>     | Trap group used for sending the SNMP trap.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>detail</b>   |
| <b>Variable OID</b>  | Object ID to which the variable name is resolved. The format is x.x.x.x.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>detail</b>   |
| <b>Sample type</b>   | Method of sampling the monitored variable and calculating the value to compare against the upper and lower thresholds. It can have the value of <b>absolute value</b> or <b>delta value</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>detail</b>   |



Table 515: show snmp rmon Output Fields (*continued*)

| Field Name                 | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Level of Output |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Startup alarm</b>       | <p>Alarm that might be sent when this entry is first activated, depending on the following criteria:</p> <ul style="list-style-type: none"> <li>Alarm is sent when one of the following situations exists: <ul style="list-style-type: none"> <li>Value of the alarm is above or equal to the rising threshold and the startup type is either <b>rising alarm</b> or <b>rising or falling alarm</b>.</li> <li>Value of the alarm is below or equal to the falling threshold and the startup type is either <b>falling alarm</b> or <b>rising or falling alarm</b>.</li> </ul> </li> <li>Alarm is <i>not</i> sent when one of the following situations exists: <ul style="list-style-type: none"> <li>Value of the alarm is above or equal to the rising threshold and the startup type is <b>falling alarm</b>.</li> <li>Value of the alarm is below or equal to the falling threshold and the startup type is <b>rising alarm</b>.</li> <li>Value of the alarm is between the thresholds.</li> </ul> </li> </ul> | <b>detail</b>   |
| <b>Owner</b>               | Name of the entry configured by the user. If the entry was created through the CLI, the owner has <b>monitor</b> prepended to it.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>detail</b>   |
| <b>Creator</b>             | Mechanism by which the entry was configured ( <b>CLI</b> or <b>SNMP</b> ).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <b>detail</b>   |
| <b>Sample interval</b>     | Time period between samples (in seconds).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <b>detail</b>   |
| <b>Rising threshold</b>    | Upper limit threshold value configured by the user.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>detail</b>   |
| <b>Falling threshold</b>   | Lower limit threshold value configured by the user.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>detail</b>   |
| <b>Rising event index</b>  | Event triggered when the rising threshold is crossed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>detail</b>   |
| <b>Falling event index</b> | Event triggered when the falling threshold is crossed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <b>detail</b>   |
| <b>Current value</b>       | Current value of the monitored variable in the most recent sample interval.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>detail</b>   |



## Sample Output

### show snmp rmon

```
user@host> show snmp rmon
Alarm
Index Variable description Value State

5 monitor
jnxOperatingCPU.9.1.0.0 5 falling threshold

Event
Index Type Last Event
1 log and trap 2009-07-10 11:34:17 PDT
Event Index: 1
Description: Event 1 triggered by Alarm 5, rising threshold (90) crossed,
(variable: jnxOperatingCPU.9.1.0.0, value: 100)
Time: 2009-07-10 11:34:07 PDT
Description: Event 1 triggered by Alarm 5, falling threshold (75) crossed,
(variable: jnxOperatingCPU.9.1.0.0, value: 5)
Time: 2009-07-10 11:34:17 PDT
```

### show snmp rmon alarms detail

```
user@host> show snmp rmon alarms detail
Alarm Index 5:
Variable name jnxOperatingCPU.9.1.0.0
Variable OID 1.3.6.1.4.1.2636.3.1.13.1.8.9.1.0.0
Sample type absolute value
Startup alarm rising or falling alarm
Owner monitor

Creator CLI
State active
Sample interval 5 seconds
Rising threshold 90
Falling threshold 75
Rising event index 1
Falling event index 1
Instance Value: 4
Instance State: falling threshold
```

### show snmp rmon events detail

```
user@host> show snmp rmon events detail
Event Index 1:
Description rmon event
Type log and trap
Community rmon-trap-group
Last event 2009-07-10 11:34:17 PDT
Creator CLI
State active
```

### show snmp rmon logs

```
user@host> show snmp rmon logs
Event Index: 1
Description: Event 1 triggered by Alarm 5, rising threshold (90) crossed,
(variable: jnxOperatingCPU.9.1.0.0, value: 100)
Time: 2009-07-10 11:34:07 PDT
Description: Event 1 triggered by Alarm 5, falling threshold (75) crossed,
(variable: jnxOperatingCPU.9.1.0.0, value: 5)
Time: 2009-07-10 11:34:17 PDT
```



## show snmp rmon history

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show snmp rmon history</code><br><code>&lt;history-index&gt;</code><br><code>sample-index &lt;sample-index&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Display the contents of the RMON history group.                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <p><b>none</b>—Display all the entries in the RMON history group.</p> <p><b>history-index</b>—(Optional) Display the contents of the specified entry in the RMON history group.</p> <p><b>sample-index</b> <b>sample-index</b>—(Optional) Display the statistics collected for the specified sample within the specified entry in the RMON history group.</p>                                                                                                                                                            |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">RMON MIB Event, Alarm, Log, and History Control Tables on page 5472</a></li><li>• <a href="#">Monitoring RMON MIB Tables on page 5727</a></li><li>• <a href="#">Configuring RMON Alarms and Events on page 5541</a></li><li>• <a href="#">Understanding RMON on page 5470</a></li><li>• <a href="#">clear snmp statistics on page 5741</a></li><li>• <a href="#">clear snmp history on page 5740</a></li><li>• <a href="#">show snmp rmon on page 5794</a></li></ul> |



## show snmp statistics

|                                 |                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show snmp statistics                                                                                                                                                                     |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.1 for the QFX Series. |
| <b>Description</b>              | Display statistics about Simple Network Management Protocol (SNMP) packets sent and received by the router or switch.                                                                    |
| <b>Options</b>                  | This command has no options.                                                                                                                                                             |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">clear snmp statistics on page 5741</a></li> </ul>                                                                                   |
| <b>List of Sample Output</b>    | <a href="#">show snmp statistics on page 5802</a>                                                                                                                                        |
| <b>Output Fields</b>            | <a href="#">Table 102 on page 1370</a> describes the output fields for the <b>show snmp statistics</b> command. Output fields are listed in the approximate order in which they appear.  |

Table 516: show snmp statistics Output Fields

| Field Name   | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Input</b> | <p>Information about received packets:</p> <ul style="list-style-type: none"> <li>• <b>Packets(snmplnPkts)</b>—Total number of messages delivered to the SNMP entity from the transport service.</li> <li>• <b>Bad versions—(snmplnBadVersions)</b> Total number of messages delivered to the SNMP entity that were for an unsupported SNMP version.</li> <li>• <b>Bad community names—(snmplnBadCommunityNames)</b> Total number of messages delivered to the SNMP entity that used an SNMP community name not known to the entity.</li> <li>• <b>Bad community uses—(snmplnBadCommunityUses)</b> Total number of messages delivered to the SNMP entity that represented an SNMP operation that was not allowed by the SNMP community named in the message.</li> <li>• <b>ASN parse errors—(snmplnASNParseErrs)</b> Total number of ASN.1 or BER errors encountered by the SNMP entity when decoding received SNMP messages.</li> <li>• <b>Too big—(snmplnTooBigs)</b> Total number of SNMP PDUs delivered to the SNMP entity with an error status field of <b>tooBig</b>.</li> <li>• <b>No such names—(snmplnNoSuchNames)</b> Total number of SNMP PDUs delivered to the SNMP entity with an error status field of <b>noSuchName</b>.</li> <li>• <b>Bad values—(snmplnBadValues)</b> Total number of SNMP PDUs delivered to the SNMP entity with an error status field of <b>badValue</b>.</li> <li>• <b>Read only—(snmplnReadOnlys)</b> Total number of valid SNMP PDUs delivered to the SNMP entity with an error status field of <b>readOnly</b>. Only incorrect implementations of SNMP generate this error.</li> </ul> |



Table 516: show snmp statistics Output Fields (*continued*)

| Field Name        | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input (continued) | <ul style="list-style-type: none"> <li>• <b>General errors—(snmpInGenErrs)</b> Total number of SNMP PDUs delivered to the SNMP entity with an error status field of <b>genErr</b>.</li> <li>• <b>Total requests varbinds—(snmpInTotalReqVars)</b> Total number of MIB objects retrieved successfully by the SNMP entity as a result of receiving valid SNMP <b>GetRequest</b> and <b>GetNext</b> PDUs.</li> <li>• <b>Total set varbinds—(snmpInSetVars)</b> Total number of MIB objects modified successfully by the SNMP entity as a result of receiving valid SNMP <b>SetRequest</b> PDUs.</li> <li>• <b>Get requests—(snmpInGetRequests)</b> Total number of SNMP <b>GetRequest</b> PDUs that have been accepted and processed by the SNMP entity.</li> <li>• <b>Get nexts—(snmpInGetNexts)</b> Total number of SNMP <b>GetNext</b> PDUs that have been accepted and processed by the SNMP entity.</li> <li>• <b>Set requests—(snmpInSetRequests)</b> Total number of SNMP <b>SetRequest</b> PDUs that have been accepted and processed by the SNMP entity.</li> <li>• <b>Get responses—(snmpInGetResponses)</b> Total number of SNMP <b>GetResponse</b> PDUs that have been accepted and processed by the SNMP entity.</li> <li>• <b>Traps—(snmpInTraps)</b> Total number of SNMP traps generated by the SNMP entity.</li> <li>• <b>Silent drops—(snmpSilentDrops)</b> Total number of <b>GetRequest</b>, <b>GetNextRequest</b>, <b>GetBulkRequest</b>, <b>SetRequests</b>, and <b>InformRequest</b> PDUs delivered to the SNMP entity that were silently dropped because the size of a reply containing an alternate response PDU with an empty variable-bindings field was greater than either a local constraint or the maximum message size associated with the originator of the requests.</li> <li>• <b>Proxy drops—(snmpProxyDrops)</b> Total number of <b>GetRequest</b>, <b>GetNextRequest</b>, <b>GetBulkRequest</b>, <b>SetRequests</b>, and <b>InformRequest</b> PDUs delivered to the SNMP entity that were silently dropped because the transmission of the message to a proxy target failed in such a way (other than a timeout) that no response PDU could be returned.</li> <li>• <b>Commit pending drops</b>—Number of SNMP packets for <b>Set</b> requests dropped because of a previous pending SNMP <b>Set</b> request on the committed configuration.</li> <li>• <b>Throttle drops</b>—Number of SNMP packets for any requests dropped reaching the throttle limit.</li> </ul> |



Table 516: show snmp statistics Output Fields (*continued*)

| Field Name | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| V3 Input   | <p>Information about SNMP version 3 packets:</p> <ul style="list-style-type: none"> <li>• <b>Unknown security models—(snmpUnknownSecurityModels)</b> Total number of packets received by the SNMP engine that were dropped because they referenced a security model that was not known to or supported by the SNMP engine.</li> <li>• <b>Invalid messages—(snmpInvalidMsgs)</b> Number of packets received by the SNMP engine that were dropped because there were invalid or inconsistent components in the SNMP message.</li> <li>• <b>Unknown pdu handlers—(snmpUnknownPDUHandlers)</b> Number of packets received by the SNMP engine that were dropped because the PDU contained in the packet could not be passed to an application responsible for handling the PDU type.</li> <li>• <b>Unavailable contexts—(snmpUnavailableContexts)</b> Number of requests received for a context that is known to the SNMP engine, but is currently unavailable.</li> <li>• <b>Unknown contexts—(snmpUnknownContexts)</b> Total number of requests received for a context that is unknown to the SNMP engine.</li> <li>• <b>Unsupported security levels—(usmStatsUnsupportedSecLevels)</b> Total number of packets received by the SNMP engine that were dropped because they requested a security level unknown to the SNMP engine (or otherwise unavailable).</li> <li>• <b>Not in time windows—(usmStatsNotInTimeWindows)</b> Total number of packets received by the SNMP engine that were dropped because they appeared outside the authoritative SNMP engine's window.</li> <li>• <b>Unknown user names—(usmStatsUnknownUserNames)</b> Total number of packets received by the SNMP engine that were dropped because they referenced a user that was not known to the SNMP engine.</li> <li>• <b>Unknown engine ids—(usmStatsUnknownEngineIDs)</b> Total number of packets received by the SNMP engine that were dropped because they referenced an SNMP engine ID that was not known to the SNMP engine.</li> <li>• <b>Wrong digests—(usmStatsWrongDigests)</b> Total number of packets received by the SNMP engine that were dropped because they did not contain the expected digest value.</li> <li>• <b>Decryption errors—(usmStatsDecryptionErrors)</b> Total number of packets received by the SNMP engine that were dropped because they could not be decrypted.</li> </ul> |



Table 516: show snmp statistics Output Fields (*continued*)

| Field Name    | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Output</b> | <p>Information about transmitted packets:</p> <ul style="list-style-type: none"> <li>• <b>Packets—(snmpOutPkts)</b> Total number of messages passed from the SNMP entity to the transport service.</li> <li>• <b>Too big—(snmpOutTooBigs)</b> Total number of SNMP PDUs generated by the SNMP entity with an error status field of <b>tooBig</b>.</li> <li>• <b>No such names—(snmpOutNoSuchNames)</b> Total number of SNMP PDUs delivered to the SNMP entity with an error status field of <b>noSuchName</b>.</li> <li>• <b>Bad values—(snmpOutBadValues)</b> Total number of SNMP PDUs generated by the SNMP entity with an error status field of <b>badValue</b>.</li> <li>• <b>General errors—(snmpOutGenErrs)</b> Total number of SNMP PDUs generated by the SNMP entity with an error status field of <b>genErr</b>.</li> <li>• <b>Get requests—(snmpOutGetRequests)</b> Total number of SNMP <b>GetRequest</b> PDUs generated by the SNMP entity.</li> <li>• <b>Get nexts—(snmpOutGetNexts)</b> Total number of SNMP <b>GetNext</b> PDUs generated by the SNMP entity.</li> <li>• <b>Set requests—(snmpOutSetRequests)</b> Total number of SNMP <b>SetRequest</b> PDUs generated by the SNMP entity.</li> <li>• <b>Get responses—(snmpOutGetResponses)</b> Total number of SNMP <b>GetResponse</b> PDUs generated by the SNMP entity.</li> <li>• <b>Traps—(snmpOutTraps)</b> Total number of SNMP traps generated by the SNMP entity.</li> </ul> |

## Sample Output

### show snmp statistics

```

user@host> show snmp statistics
SNMP statistics:
  Input:
    Packets: 246213, Bad versions: 12, Bad community names: 12,
    Bad community uses: 0, ASN parse errors: 96,
    Too big: 0, No such names: 0, Bad values: 0,
    Read onlys: 0, General errors: 0,
    Total request varbinds: 227084, Total set varbinds: 67,
    Get requests: 44942, Get nexts: 190371, Set requests: 10712,
    Get responses: 0, Traps: 0,
    Silent drops: 0, Proxy drops: 0, Commit pending drops: 0,
    Throttle drops: 0,
  V3 Input:
    Unknown security models: 0, Invalid messages: 0
    Unknown pdu handlers: 0, Unavailable contexts: 0
    Unknown contexts: 0, Unsupported security levels: 1
    Not in time windows: 0, Unknown user names: 0
    Unknown engine ids: 44, Wrong digests: 23, Decryption errors: 0
  Output:
    Packets: 246093, Too big: 0, No such names: 31561,
    Bad values: 0, General errors: 2,
    Get requests: 0, Get nexts: 0, Set requests: 0,
    Get responses: 246025, Traps: 0

```



## show snmp v3

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show snmp v3</code><br><code>&lt;access &lt;brief   detail&gt;   community   general   groups   notify &lt;filter&gt;   target &lt;address   parameters&gt;   users&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>              | Display the Simple Network Management Protocol version 3 (SNMPv3) operating configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <p><b>none</b>—Display all of the SNMPv3 operating configuration.</p> <p><b>access</b>—(Optional) Display SNMPv3 access information.</p> <p><b>brief   detail</b>—(Optional) Display brief or detailed information about SNMPv3 access information.</p> <p><b>community</b>—(Optional) Display SNMPv3 community information.</p> <p><b>general</b>—(Optional) Display SNMPv3 general information.</p> <p><b>groups</b>—(Optional) Display SNMPv3 security-to-group information.</p> <p><b>notify &lt;filter&gt;</b>—(Optional) Display SNMPv3 notify information and, optionally, notify filter information.</p> <p><b>target &lt;address   parameters&gt;</b>—(Optional) Display SNMPv3 target information and, optionally, either target address or target parameter information.</p> <p><b>users</b>—(Optional) Display SNMPv3 user information.</p> |
| <b>Additional Information</b>   | To edit the default display of the <b>show snmp v3</b> command, specify options in the <b>show</b> statement at the <b>[edit snmp v3]</b> hierarchy level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>List of Sample Output</b>    | <a href="#">show snmp v3 on page 5805</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Output Fields</b>            | <a href="#">Table 517 on page 5804</a> describes the output fields for the <b>show snmp v3</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |



Table 517: show snmp v3 Output Fields

| Field Name                | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Local engine              | <p>Information about the local SNMP engine configuration:</p> <ul style="list-style-type: none"> <li>• <b>Local engine ID</b>—Unique Identifier of the local SNMPv3 engine.</li> <li>• <b>Engine boots</b>—Number of times the local SNMPv3 engine has rebooted or reinitialized since this engine ID was configured.</li> <li>• <b>Engine time</b>—Number of seconds since the local SNMPv3 engine was last rebooted or reinitialized.</li> <li>• <b>Max msg size</b>—Maximum message size the sender can accommodate.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Engine ID (local engine)  | <p>Information about the local SNMP engine ID and the associated users:</p> <ul style="list-style-type: none"> <li>• <b>User</b>—SNMPv3 username.</li> <li>• <b>Auth/Priv</b>—Authentication and encryption algorithm that is configured for the user.</li> <li>• <b>Storage</b>—Indicates whether a username is saved to the configuration file (nonvolatile) or not saved (volatile). Applies only to users with active status.</li> <li>• <b>Status</b>—Status of the user as listed in the SNMPv3 user table. Only rows with an active status in the table are used by the SNMPv3 engine.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Engine ID (remote engine) | <p>Information about a remote SNMP engine, associated users, user groups, and user access policies:</p> <ul style="list-style-type: none"> <li>• <b>User</b>—SNMPv3 username.</li> <li>• <b>Auth/Priv</b>—Authentication and encryption algorithm that is configured for the user.</li> <li>• <b>Storage</b>—Indicates whether a username is saved to the configuration file (nonvolatile) or not (volatile). Applies only to users with active status.</li> <li>• <b>Status</b>—Status of a new user that has been activated. Only users with an active status can use SNMPv3.</li> <li>• <b>Group name</b>—Name of a group of users for which the configured access privileges apply.</li> <li>• <b>Security model</b>—Security model (such as <b>usm</b>, <b>v1</b>, <b>v2c</b>, or <b>any</b>) that is configured for the group. The security model is used with the security name to ensure messaging security.</li> <li>• <b>Security name</b>—Security name that is associated with a user, and which is used with the security model to ensure messaging security.</li> <li>• <b>Storage type</b>—Indicates whether a username is saved to the configuration file (nonvolatile) or not saved (volatile). Applies only to users with active status.</li> <li>• <b>Status</b>—Status of a user in a group. Only users with an active status can use SNMPv3.</li> </ul> |
| Access control            | <p>Information about access control:</p> <ul style="list-style-type: none"> <li>• <b>Group name</b>—Name of a group of users for which the configured access privileges apply.</li> <li>• <b>Context prefix</b>—SNMPv3 context for which the configured access privileges apply.</li> <li>• <b>Security model/level</b>—Security model and security level combination that is configured for user access privileges.</li> <li>• <b>Read view</b>—Identifies the MIB view used for SNMPv3 read operations.</li> <li>• <b>Write view</b>—Identifies the MIB view used for SNMPv3 write operations.</li> <li>• <b>Notify view</b>—Identifies the MIB view used for outbound SNMP notifications.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |



## Sample Output

### show snmp v3

```

user@host> show snmp v3
Local engine ID: 80 00 0a 4c e04 31 32 33 34
Engine boots:      38
Engine time:       64583 seconds
Max msg size:      2048 bytes

Engine ID: local
  User                               Auth/Priv  Storage    Status
  user1                             md5/des    nonvolatile active
  user2                             sha/none   nonvolatile active
  user3                             none/none  nonvolatile active

Engine ID: 81 00 0a 4c 04 64 64 64 64
  User                               Auth/Priv  Storage    Status
  UNEW                             md5/none   nonvolatile active
Group name      Security model  Security name  Storage type  Status
g1              usm          user1          nonvolatile   active
g2              usm          user2          nonvolatile   active
g3              usm          user3          nonvolatile   active

Access control:
Group           Context prefix  Security model/level  Read view  Write view  Notify view
g1              usm/privacy    v1                   v1
g2              usm/authent    v1                   v1
g3              usm/none       v1                   v1

```



## traceroute fabric unicast-flow

**Syntax** `traceroute fabric unicast-flow flow-spec-name flow-specification-name fma fma-name  
 <source-fmep fmep-name>  
 <dest-fmep fmep-name>  
 <forced-fte-interface fte-interface>  
 <count count>  
 <verbose>`

**Release Information** Command introduced in Junos OS Release 12.2 for the QFX Series.

**Description** Trace the path taken by a specific unicast flow (ping) operation across a VLAN on the QFabric system from a source maintenance endpoint (FMEP) to a destination FMEP. The source and destination FMEPs may be on the same Node device, different Node devices connected to the same Interconnect device, or different Node devices connected to different Interconnect devices.

The flow path is the sequence of Packet Forwarding Engine forwarding hops along which the protocol data unit (PDU) travels. The hop-by-hop sequence and number of hops are reported in terms of fabric maintenance intermediate points (FMIPs), which are interfaces on the Packet Forwarding Engine of the Interconnect device. An FMIP sends a response to the source FMEP when the traceroute PDU is received.



**NOTE:** This command is not supported on the QFX3000-M QFabric system.

**Options** `dest-fmep-id source-fmep-id`—(Optional) ID of the destination FMEP of the traceroute operation.

`flow-spec-name flow-specification-name`—Name of the flow specification that defines the parameters of the traceroute operation.

`fma-name fma-name`—Name of the FMA that associates a VLAN with the FMEPs.

`forced-fte-interface fte-interface`—(Optional) Option to force the fabric ping operation to use the specified FTE interface to inject the PDU into the fabric instead of using the internal forwarding path lookup table to determine the FTE interface.

`source-fmep-id source-fmep-id`—(Optional) ID of the FMEP that is the source of the traceroute operation.

`verbose`—(Optional) Detailed version of the output display.

**Required Privilege Level** `interface`—To view this statement in the configuration.  
`interface-control`—To add this statement to the configuration.

**Related Documentation**

- [Overview of Internal Fabric Monitoring on page 5451](#)
- [Configuring a Fabric Maintenance Association on page 5527](#)



- [Configuring Flow Specifications on page 5528](#)
- [fabric \(OAM\) on page 5599](#)
- [ping fabric multicast-flow on page 5757](#)
- [ping fabric unicast-flow on page 5759](#)

**List of Sample Output**    [traceroute fabric unicast-flow on page 5808](#)  
[traceroute fabric unicast-flow \(Verbose\) on page 5808](#)

**Output Fields**    [Table 518 on page 5807](#) lists the output fields for the **traceroute fabric-unicast-flow** command. Output fields are listed in the approximate order in which they appear.

**Table 518: traceroute fabric unicast-flow Output Fields**

| Field Name                                                                                             | Field Description                                                                                      |
|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| Fabric flow traceroute between source <i>source-fmep-name</i> destination <i>destination-fmep-name</i> | Source and destination FMEP names.                                                                     |
| Using fabric flow-specification                                                                        | Name of the flow specification.                                                                        |
| Ethernet frame-size                                                                                    | Ethernet frame size.                                                                                   |
| Source-MAC                                                                                             | MAC address of the source FMEP interface.                                                              |
| Destination-MAC                                                                                        | MAC address of the destination FMEP interface.                                                         |
| Ethertype                                                                                              | EtherType protocol.                                                                                    |
| Received response from fmip-id, interface                                                              | FMIP identifier and interface name of the FMIP that received the PDU and responded to the source FMEP. |
| Received total <i>number</i> responses                                                                 | Number of responses that are received after the traceroute operation has finished.                     |



## Sample Output

**traceroute fabric  
unicast-flow**

```
user@host> traceroute fabric unicast-flow fma-name fma1 source-fmep-id 1 dest-fmep-id 2  
flow-spec-name fspec1  
Received response from fmip-id 128.40.0.8, interface A0003:0/1/2  
Received response from fmip-id 128.128.0.8, interface A0003:0/0/8  
Received response from fmep-id 2  
Received total 3 responses
```

## Sample Output

**traceroute fabric  
unicast-flow  
(Verbose)**

```
user@host> traceroute fabric unicast-flow fma-name fma1 source-fmep-id 1 dest-fmep-id 2  
flow-spec-name fspec1 verbose  
Fabric flow traceroute between source ED1494 destination ED1497  
Using fabric flow-specification: fspec1  
Ethernet frame-size: 256  
Source-MAC: 0:EF:7:99:85:10  
Destination-MAC: 0:D3:A6:11:39:21  
Ethertype: 11564  
Received response from fmip-id 128.40.0.8, interface A0003:0/1/2  
Received response from fmip-id 128.128.0.8, interface A0003:0/0/8  
Received response from fmep-id 2  
Received total 3 responses
```



## CHAPTER 65

# Troubleshooting

- [Troubleshooting Overview on page 5809](#)
- [Troubleshooting Procedures on page 5813](#)

## Troubleshooting Overview

---

- [Understanding Troubleshooting Resources on page 5809](#)
- [Troubleshooting Overview on page 5811](#)

## Understanding Troubleshooting Resources

This topic describes some of the troubleshooting resources available for the QFX Series. These resources include tools such as the Junos OS CLI, Junos Space applications, and the Advanced Insight Scripts (AI-Scripts).

[Table 519 on page 5809](#) provides a list of some of the troubleshooting resources.

**Table 519: Troubleshooting Resources on the QFX Series**

| Troubleshooting Resource              | Description                                                                                                                                               | Documentation                                                             |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| Chassis alarms                        | Chassis alarms indicate a failure on the switch or one of its components. A chassis alarm count is displayed on the LCD panel on the front of the switch. | <a href="#">“Chassis Alarm Messages on a QFX3500 Device” on page 5826</a> |
| Chassis Status LEDs and Fan Tray LEDs | A blinking amber Power, Fan, or Fan Tray LED indicates a hardware component error. A blinking amber Status LED indicates a software error.                | Chassis Status LEDs on a QFX3500 Device                                   |
| Interface alarms                      | A predefined alarm (red or yellow) for an interface type is triggered when an interface of that type goes down.                                           | <a href="#">“Interface Alarm Messages” on page 5829</a>                   |
| System alarms                         | A predefined alarm is triggered by a missing rescue configuration or problem with the software license.                                                   | <a href="#">“Understanding Alarms” on page 5825</a>                       |



Table 519: Troubleshooting Resources on the QFX Series (*continued*)

| Troubleshooting Resource                      | Description                                                                                                                                                                                                                                                                                                                                                                                                | Documentation                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System log messages                           | The system log includes details of system and user events, including errors. Specify the severity and type of system log messages you wish to view or save, and configure the output to be sent to local or remote hosts.                                                                                                                                                                                  | <ul style="list-style-type: none"> <li>• <a href="#">Overview of Single-Chassis System Logging Configuration on page 5505</a></li> <li>• <a href="#">Junos OS System Log Configuration Statements on page 5551</a></li> </ul>                                                                                                                                                                                                     |
| Junos OS operational mode commands            | Operational mode commands can be used to monitor switch performance and current activity on the network. For example, use the <b>traceroute monitor</b> command to locate points of failure in a network.                                                                                                                                                                                                  | <ul style="list-style-type: none"> <li>• <a href="#">Monitoring System Process Information on page 277</a></li> <li>• <a href="#">Monitoring System Properties on page 278</a></li> <li>• <a href="#">traceroute monitor</a></li> </ul>                                                                                                                                                                                           |
| Junos OS automation scripts (event scripts)   | Event scripts can be used to automate network troubleshooting and management tasks.                                                                                                                                                                                                                                                                                                                        | Junos OS Configuration and Operations Automation Guide                                                                                                                                                                                                                                                                                                                                                                            |
| Junos OS XML operational tags                 | XML operational tags are equivalent in function to operational mode commands in the CLI, which you can use to retrieve status information for a device.                                                                                                                                                                                                                                                    | <i>Junos XML API Operational Reference</i>                                                                                                                                                                                                                                                                                                                                                                                        |
| NETCONF XML management protocol               | The NETCONF XML management protocol defines basic operations that are equivalent to Junos OS CLI configuration mode commands. Client applications use the protocol operations to display, edit, and commit configuration statements (among other operations), just as administrators use CLI configuration mode commands such as <b>show</b> , <b>set</b> , and <b>commit</b> to perform those operations. | <i>NETCONF XML Management Protocol Guide</i>                                                                                                                                                                                                                                                                                                                                                                                      |
| SNMP MIBs and traps                           | MIBs enable the monitoring of network devices from a central location. For example, use the Traceroute MIB to monitor devices remotely.                                                                                                                                                                                                                                                                    | <ul style="list-style-type: none"> <li>• <a href="#">Juniper Networks Enterprise-Specific MIBs on page 5484</a></li> <li>• <a href="#">Juniper Networks Enterprise-Specific SNMP Version 1 Traps on page 5498</a></li> <li>• <a href="#">Juniper Networks Enterprise-Specific SNMP Version 2 Traps on page 5500</a></li> <li>• <a href="#">Using the Traceroute MIB for Remote Monitoring Devices Running Junos OS</a></li> </ul> |
| AI-Scripts and Advanced Insight Manager (AIM) | AI-Scripts installed on the switch can automatically detect and monitor faults on the switch, and depending on the configuration on the AIM application, send notifications of potential problems and submit problem reports to Juniper Support Systems.                                                                                                                                                   | <i>Advanced Insight Scripts (AI-Scripts) Release Notes</i>                                                                                                                                                                                                                                                                                                                                                                        |



Table 519: Troubleshooting Resources on the QFX Series (*continued*)

| Troubleshooting Resource        | Description                                                                                                                                                                                                                                                                                                                                 | Documentation                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| Junos Space Service Now         | This application enables you to display and manage information about problem events. When problems are detected on the switch by Advanced Insight Scripts (AI-Scripts) that are installed on the switch, the data is collected and sent to Service Now for your review and action.                                                          | Service Automation                                        |
| Junos Space Service Insight     | This application helps in accelerating operational analysis and managing the exposure to known issues. You can identify devices that are nearing their End Of Life (EOL) and also discover and prevent issues that could occur in your network. The functionality of Service Insight is dependent on the information sent from Service Now. | Service Automation                                        |
| Juniper Networks Knowledge Base | You can search in this database for Juniper Networks product information, including alerts and troubleshooting tips.                                                                                                                                                                                                                        | <a href="http://kb.juniper.net">http://kb.juniper.net</a> |

## Troubleshooting Overview

This topic provides a general guide to troubleshooting some typical problems you may encounter on your QFX Series product.

[Table 520 on page 5811](#) provides a list of problem categories, summary of the symptom or problem, and recommended actions with links to the troubleshooting documentation.

Table 520: Troubleshooting on the QFX Series

| Problem Category           | Symptom or Problem                                                          | Recommended Action                                                                             |
|----------------------------|-----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| Switch hardware components | LCD panel shows a chassis alarm count.                                      | See “Chassis Alarm Messages on a QFX3500 Device” on page 5826.                                 |
|                            | Fan tray LED is blinking amber.                                             | See Fan Tray LED on a QFX3500 Device.                                                          |
|                            | Chassis status LED for the power is blinking amber.                         | See Chassis Status LEDs on a QFX3500 Device.                                                   |
|                            | Chassis status LED for the fan (on the management board) is blinking amber. | Replace the management board as soon as possible. See Chassis Status LEDs on a QFX3500 Device. |



Table 520: Troubleshooting on the QFX Series (*continued*)

| Problem Category               | Symptom or Problem                                                                                          | Recommended Action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------|-------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Port configuration             | Cannot configure a port as a Gigabit Ethernet port.                                                         | <p>Check whether the port is a valid Gigabit Ethernet port (6 through 41).</p> <p>See <a href="#">“QFX3500 Device Overview” on page 3</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                                | Cannot configure a port as a Fibre Channel port.                                                            | <p>Check whether the port is a valid Fibre Channel port (0 through 5 and 42 through 47).</p> <p>See <a href="#">“QFX3500 Device Overview” on page 3</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                                | Cannot configure a port as a 10-Gigabit Ethernet port.                                                      | <p>If the port is not a 40-Gbps QSFP+ interface, check whether the port is in the range of 0 through 5 or 42 through 47. If one of the ports in that block (0 through 5 or 42 through 47) is configured as a Fibre Channel port, then all ports in that block must also be configured as Fibre Channel ports.</p> <p>If the port is a 40-Gbps QSFP+ interface, make sure the configuration does not exceed the interface limit. Each 40-Gbps QSFP+ interface can be split into four 10-Gigabit Ethernet interfaces, but because port 0 is reserved, so you can only configure an additional fifteen 10-Gigabit Ethernet interfaces.</p> <p>See <a href="#">“QFX3500 Device Overview” on page 3</a>.</p> |
|                                | Cannot configure a 40-Gbps QSFP+ interface.                                                                 | <p>The 40-Gbps QSFP+ interfaces can only be used as 10-Gigabit Ethernet interfaces. Each 40-Gbps QSFP+ interface can be split into four 10-Gigabit Ethernet interfaces using a breakout cable. However, port 0 is reserved, so you can only configure an additional fifteen 10-Gigabit Ethernet interfaces.</p> <p>See <a href="#">“QFX3500 Device Overview” on page 3</a>.</p>                                                                                                                                                                                                                                                                                                                         |
| External devices (USB devices) | Upgrading software from a USB device results in an upgrade failure, and the system enters an invalid state. | Unplug the USB device and reboot the switch.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Initial device configuration   | Cannot configure management Ethernet ports.                                                                 | <p>Configure the management ports from the console port. You cannot configure the management ports by directly connecting to them.</p> <p><b>NOTE:</b> The management ports are on the front panel of the QFX3500 switch. They are labeled <b>C0</b> and <b>C1</b> on the front panel. In the CLI they are referred to as <b>me0</b> and <b>me1</b>.</p> <p>See <a href="#">“Configuring a QFX3500 Device as a Standalone Switch” on page 138</a>.</p>                                                                                                                                                                                                                                                  |



Table 520: Troubleshooting on the QFX Series (*continued*)

| Problem Category                   | Symptom or Problem                                                                                                                                                    | Recommended Action                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Software upgrade and configuration | Failed software upgrade.                                                                                                                                              | See <a href="#">“Recovering from a Failed Software Installation” on page 93.</a>                                                                                                                                                                                                                                                                                                                                                                   |
|                                    | Active partition becomes inactive after upgrade.                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                    | Problem with the active configuration file.                                                                                                                           | See the following topics: <ul style="list-style-type: none"> <li>• <a href="#">Loading a Previous Configuration File on page 1122</a></li> <li>• <a href="#">Reverting to the Default Factory Configuration on page 148</a></li> <li>• <a href="#">Reverting to the Rescue Configuration on page 150</a></li> <li>• <a href="#">Performing a Recovery Installation on a QFX3008-I, QFX3600-I, QFX3600, or QFX3500 Device on page 85</a></li> </ul> |
|                                    | Root password is lost or forgotten.                                                                                                                                   | Recover the root password. See <a href="#">“Recovering the Root Password” on page 1105.</a>                                                                                                                                                                                                                                                                                                                                                        |
| Network interfaces                 | An aggregated Ethernet interface is down.                                                                                                                             | See <a href="#">“Troubleshooting an Aggregated Ethernet Interface” on page 1107.</a>                                                                                                                                                                                                                                                                                                                                                               |
|                                    | Interface on built-in network port is down.                                                                                                                           | See <a href="#">“Troubleshooting Network Interfaces” on page 1106.</a>                                                                                                                                                                                                                                                                                                                                                                             |
|                                    | Interface on port in which SFP or SFP+ transceiver is installed in an SFP+ uplink module is down.                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Ethernet switching                 | A MAC address entry in the Ethernet switching table is not updated after the device with that MAC address has been moved from one interface to another on the switch. | See <a href="#">“Troubleshooting Ethernet Switching” on page 1761.</a>                                                                                                                                                                                                                                                                                                                                                                             |
| Firewall filter                    | Firewall configuration exceeded available Ternary Content Addressable Memory (TCAM) space.                                                                            | See <a href="#">“Troubleshooting Firewall Filter Configuration” on page 4303.</a>                                                                                                                                                                                                                                                                                                                                                                  |

## Troubleshooting Procedures

- [Recovering from a Failed Software Installation on page 5813](#)
- [Loading a Previous Configuration File on page 5814](#)
- [Reverting to the Default Factory Configuration on page 5815](#)
- [Reverting to the Rescue Configuration on page 5816](#)
- [Recovering the Root Password on page 5816](#)

## Recovering from a Failed Software Installation

**Problem** If the Junos OS appears to have been installed but the CLI does not work, or if the switch has no software installed, you can use this recovery installation procedure to install the Junos OS.



**Solution** If a Junos OS image already exists on the switch, you can either install the new Junos OS package in a separate partition, in which case both Junos OS images remain on the switch, or you can remove the existing Junos OS image before you start the new installation process.

To perform a recovery installation:

1. Power on the switch. The loader script starts.
2. After the message **Loading /boot/defaults/loader.conf** appears, you are prompted with the following message:

**Hit [Enter] to boot immediately, or space bar for command prompt.**

Press the Spacebar to enter the manual loader. The **loader>** prompt appears.

3. Enter the following command:

```
loader> install [- --format] [- --external] source
```

where:

- **format**—Enables you to erase the installation media before installing the installation package. If you do not include this option, the system installs the new Junos OS in a different partition from that of the most recently installed Junos OS.
- **external**—Installs the installation package onto external media (a USB stick, for example).
- **source**—Represents the name and location of the Junos OS package, either on a server on the network or as a file on an external media, as shown in the following two examples:
  - Network address of the server and the path on the server; for example, **ftp://192.171.28/junos/jinstall-qfx-11.1R1.5-domestic-signed.tgz**
  - Junos OS package on a USB device (commonly stored in the root drive as the only file), for example, **file:///jinstall-qfx-11.1R1.5-domestic-signed.tgz**.

The installation now proceeds normally and ends with a login prompt.

## Loading a Previous Configuration File

You can use the **rollback <number>** command to return to a previously committed configuration file. A switch saves the last 50 committed configurations, including the rollback number, date, time, and name of the user who issued the **commit** configuration command.

### Syntax

```
rollback <number>
```

### Options

- **none**—Return to the most recently saved configuration.
- **number**—Configuration to return to.



- **Range:** 0 through 49. The most recently saved configuration is number 0, and the oldest saved configuration is number 49.
- **Default:** 0

To return to a configuration prior to the most recently committed one:

1. Specify the rollback number (here, 1 is entered and the configuration returns to the previously committed configuration):

```
[edit]
user@switch# rollback 1
load complete
```

2. Activate the configuration you have loaded:

```
[edit]
user@switch# commit
```

**Related  
Documentation**

- [Configuration File Terms on page 29](#)

## Reverting to the Default Factory Configuration

If for any reason the current active configuration fails, you can revert to the default factory configuration. The default factory configuration contains the basic configuration settings. This is the first configuration of the switch, and it is loaded when the switch is first installed and powered on.

The **load factory default** command is a standard Junos OS configuration command. This configuration command replaces the current active configuration with the default factory configuration.

To revert the switch to the rescue configuration:

1. 

```
[edit]
user@switch# load factory-default
[edit]
user@switch# delete system commit factory-settings
[edit]
user@switch# commit
```

**Related  
Documentation**

- [Understanding Configuration Files on page 1113](#)
- [Loading a Previous Configuration File on page 1122](#)
- [Reverting to the Rescue Configuration on page 150](#)



## Reverting to the Rescue Configuration

If someone inadvertently commits a configuration that denies management access to a QFX Series product and the console port is not accessible, you can overwrite the invalid configuration and replace it with the rescue configuration. The rescue configuration is a previously committed, valid configuration.

To revert the switch to the rescue configuration:

1. Enter the **load override** command.

```
[edit]
user@switch# load override filename
```

2. Commit your changes.

```
[edit]
user@switch# commit filename
```

### Related Documentation

- [Setting or Deleting the Rescue Configuration on page 1131](#)
- [Reverting to the Default Factory Configuration on page 148](#)
- [Configuration File Terms on page 29](#)

## Recovering the Root Password

If you forget the root password for the QFX3500 switch, you can use the password recovery procedure to reset the root password.



NOTE: The root password cannot be recovered on a QFabric system.



NOTE: You need console access to the switch to recover the root password.

To recover the root password:

1. Power off the switch by switching off the AC power outlet of the device or, if necessary, by pulling the power cords out of the QFX3500 switch power supplies.
2. Turn off the power to the management device, such as a PC or laptop computer, that you want to use to access the CLI.
3. Plug one end of the Ethernet rollover cable supplied with the switch into the RJ-45-to-DB-9 serial port adapter supplied with the switch.
4. Plug the RJ-45-to-DB-9 serial port adapter into the serial port on the management device.
5. Connect the other end of the Ethernet rollover cable to the console port on the switch.
6. Turn on the power to the management device.



7. On the management device, start your asynchronous terminal emulation application (such as Microsoft Windows Hyperterminal) and select the appropriate **COM** port to use (for example, **COM1**).
8. Configure the port settings as follows:
  - Bits per second: 9600
  - Data bits: 8
  - Parity: None
  - Stop bits: 1
  - Flow control: None
9. Power on the switch by (if necessary) plugging the power cords into the QFX3500 switch power supply, or turning on the power to the device or switch by switching on the AC power outlet the device is plugged into.  
  
The terminal emulation screen on your management device displays the switch's boot sequence.
10. When the following prompt appears, press the Spacebar to access the switch's bootstrap loader command prompt:  
  
Hit [Enter] to boot immediately, or space bar for command prompt.  
Booting [kernel] in 9 seconds...
11. At the following prompt, enter **boot -s** to start up the system in single-user mode.  
  
ok **boot -s**
12. At the following prompt, enter **recovery** to start the root password recovery procedure.  
  
Enter full pathname of shell or 'recovery' for root password recovery or RETURN for /bin/sh: **recovery**
13. Enter configuration mode in the CLI.
14. Set the root password. For example:  
  
user@switch# **set system root-authentication plain-text-password**
15. At the following prompt, enter the new root password. For example:  
  
New password: **juniper1**  
Retype new password:
16. At the second prompt, reenter the new root password.
17. After you have finished configuring the password, commit the configuration.  
  
root@host# **commit**  
commit complete
18. Exit configuration mode in the CLI.
19. Exit operational mode in the CLI.
20. At the prompt, enter **y** to reboot the switch.  
  
Reboot the system? [y/n] **y**

**Related Documentation** • [Configuring the Root Password on page 1222](#)







## PART 20

# Troubleshooting

- [Overview on page 5821](#)
- [Administration on page 5831](#)
- [Troubleshooting on page 5843](#)







## CHAPTER 66

# Overview

- [General Troubleshooting on page 5821](#)
- [Alarms on page 5825](#)

## General Troubleshooting

---

- [Understanding Troubleshooting Resources on page 5821](#)
- [Troubleshooting Overview on page 5823](#)

## Understanding Troubleshooting Resources

This topic describes some of the troubleshooting resources available for the QFX Series. These resources include tools such as the Junos OS CLI, Junos Space applications, and the Advanced Insight Scripts (AI-Scripts).

[Table 519 on page 5809](#) provides a list of some of the troubleshooting resources.

**Table 521: Troubleshooting Resources on the QFX Series**

| Troubleshooting Resource              | Description                                                                                                                                               | Documentation                                                             |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| Chassis alarms                        | Chassis alarms indicate a failure on the switch or one of its components. A chassis alarm count is displayed on the LCD panel on the front of the switch. | <a href="#">“Chassis Alarm Messages on a QFX3500 Device” on page 5826</a> |
| Chassis Status LEDs and Fan Tray LEDs | A blinking amber Power, Fan, or Fan Tray LED indicates a hardware component error. A blinking amber Status LED indicates a software error.                | Chassis Status LEDs on a QFX3500 Device                                   |
| Interface alarms                      | A predefined alarm (red or yellow) for an interface type is triggered when an interface of that type goes down.                                           | <a href="#">“Interface Alarm Messages” on page 5829</a>                   |
| System alarms                         | A predefined alarm is triggered by a missing rescue configuration or problem with the software license.                                                   | <a href="#">“Understanding Alarms” on page 5825</a>                       |



Table 521: Troubleshooting Resources on the QFX Series (*continued*)

| Troubleshooting Resource                      | Description                                                                                                                                                                                                                                                                                                                                                                                                | Documentation                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System log messages                           | The system log includes details of system and user events, including errors. Specify the severity and type of system log messages you wish to view or save, and configure the output to be sent to local or remote hosts.                                                                                                                                                                                  | <ul style="list-style-type: none"> <li>• <a href="#">Overview of Single-Chassis System Logging Configuration on page 5505</a></li> <li>• <a href="#">Junos OS System Log Configuration Statements on page 5551</a></li> </ul>                                                                                                                                                                                                     |
| Junos OS operational mode commands            | Operational mode commands can be used to monitor switch performance and current activity on the network. For example, use the <b>traceroute monitor</b> command to locate points of failure in a network.                                                                                                                                                                                                  | <ul style="list-style-type: none"> <li>• <a href="#">Monitoring System Process Information on page 277</a></li> <li>• <a href="#">Monitoring System Properties on page 278</a></li> <li>• <a href="#">traceroute monitor</a></li> </ul>                                                                                                                                                                                           |
| Junos OS automation scripts (event scripts)   | Event scripts can be used to automate network troubleshooting and management tasks.                                                                                                                                                                                                                                                                                                                        | Junos OS Configuration and Operations Automation Guide                                                                                                                                                                                                                                                                                                                                                                            |
| Junos OS XML operational tags                 | XML operational tags are equivalent in function to operational mode commands in the CLI, which you can use to retrieve status information for a device.                                                                                                                                                                                                                                                    | <i>Junos XML API Operational Reference</i>                                                                                                                                                                                                                                                                                                                                                                                        |
| NETCONF XML management protocol               | The NETCONF XML management protocol defines basic operations that are equivalent to Junos OS CLI configuration mode commands. Client applications use the protocol operations to display, edit, and commit configuration statements (among other operations), just as administrators use CLI configuration mode commands such as <b>show</b> , <b>set</b> , and <b>commit</b> to perform those operations. | <i>NETCONF XML Management Protocol Guide</i>                                                                                                                                                                                                                                                                                                                                                                                      |
| SNMP MIBs and traps                           | MIBs enable the monitoring of network devices from a central location. For example, use the Traceroute MIB to monitor devices remotely.                                                                                                                                                                                                                                                                    | <ul style="list-style-type: none"> <li>• <a href="#">Juniper Networks Enterprise-Specific MIBs on page 5484</a></li> <li>• <a href="#">Juniper Networks Enterprise-Specific SNMP Version 1 Traps on page 5498</a></li> <li>• <a href="#">Juniper Networks Enterprise-Specific SNMP Version 2 Traps on page 5500</a></li> <li>• <a href="#">Using the Traceroute MIB for Remote Monitoring Devices Running Junos OS</a></li> </ul> |
| AI-Scripts and Advanced Insight Manager (AIM) | AI-Scripts installed on the switch can automatically detect and monitor faults on the switch, and depending on the configuration on the AIM application, send notifications of potential problems and submit problem reports to Juniper Support Systems.                                                                                                                                                   | <i>Advanced Insight Scripts (AI-Scripts) Release Notes</i>                                                                                                                                                                                                                                                                                                                                                                        |



Table 521: Troubleshooting Resources on the QFX Series (*continued*)

| Troubleshooting Resource        | Description                                                                                                                                                                                                                                                                                                                                 | Documentation                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| Junos Space Service Now         | This application enables you to display and manage information about problem events. When problems are detected on the switch by Advanced Insight Scripts (AI-Scripts) that are installed on the switch, the data is collected and sent to Service Now for your review and action.                                                          | Service Automation                                        |
| Junos Space Service Insight     | This application helps in accelerating operational analysis and managing the exposure to known issues. You can identify devices that are nearing their End Of Life (EOL) and also discover and prevent issues that could occur in your network. The functionality of Service Insight is dependent on the information sent from Service Now. | Service Automation                                        |
| Juniper Networks Knowledge Base | You can search in this database for Juniper Networks product information, including alerts and troubleshooting tips.                                                                                                                                                                                                                        | <a href="http://kb.juniper.net">http://kb.juniper.net</a> |

## Troubleshooting Overview

This topic provides a general guide to troubleshooting some typical problems you may encounter on your QFX Series product.

[Table 520 on page 5811](#) provides a list of problem categories, summary of the symptom or problem, and recommended actions with links to the troubleshooting documentation.

Table 522: Troubleshooting on the QFX Series

| Problem Category           | Symptom or Problem                                                          | Recommended Action                                                                             |
|----------------------------|-----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| Switch hardware components | LCD panel shows a chassis alarm count.                                      | See “Chassis Alarm Messages on a QFX3500 Device” on page 5826.                                 |
|                            | Fan tray LED is blinking amber.                                             | See Fan Tray LED on a QFX3500 Device.                                                          |
|                            | Chassis status LED for the power is blinking amber.                         | See Chassis Status LEDs on a QFX3500 Device.                                                   |
|                            | Chassis status LED for the fan (on the management board) is blinking amber. | Replace the management board as soon as possible. See Chassis Status LEDs on a QFX3500 Device. |



Table 522: Troubleshooting on the QFX Series (*continued*)

| Problem Category               | Symptom or Problem                                                                                          | Recommended Action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------|-------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Port configuration             | Cannot configure a port as a Gigabit Ethernet port.                                                         | <p>Check whether the port is a valid Gigabit Ethernet port (6 through 41).</p> <p>See <a href="#">“QFX3500 Device Overview” on page 3</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                                | Cannot configure a port as a Fibre Channel port.                                                            | <p>Check whether the port is a valid Fibre Channel port (0 through 5 and 42 through 47).</p> <p>See <a href="#">“QFX3500 Device Overview” on page 3</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                                | Cannot configure a port as a 10-Gigabit Ethernet port.                                                      | <p>If the port is not a 40-Gbps QSFP+ interface, check whether the port is in the range of 0 through 5 or 42 through 47. If one of the ports in that block (0 through 5 or 42 through 47) is configured as a Fibre Channel port, then all ports in that block must also be configured as Fibre Channel ports.</p> <p>If the port is a 40-Gbps QSFP+ interface, make sure the configuration does not exceed the interface limit. Each 40-Gbps QSFP+ interface can be split into four 10-Gigabit Ethernet interfaces, but because port 0 is reserved, so you can only configure an additional fifteen 10-Gigabit Ethernet interfaces.</p> <p>See <a href="#">“QFX3500 Device Overview” on page 3</a>.</p> |
|                                | Cannot configure a 40-Gbps QSFP+ interface.                                                                 | <p>The 40-Gbps QSFP+ interfaces can only be used as 10-Gigabit Ethernet interfaces. Each 40-Gbps QSFP+ interface can be split into four 10-Gigabit Ethernet interfaces using a breakout cable. However, port 0 is reserved, so you can only configure an additional fifteen 10-Gigabit Ethernet interfaces.</p> <p>See <a href="#">“QFX3500 Device Overview” on page 3</a>.</p>                                                                                                                                                                                                                                                                                                                         |
| External devices (USB devices) | Upgrading software from a USB device results in an upgrade failure, and the system enters an invalid state. | Unplug the USB device and reboot the switch.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Initial device configuration   | Cannot configure management Ethernet ports.                                                                 | <p>Configure the management ports from the console port. You cannot configure the management ports by directly connecting to them.</p> <p><b>NOTE:</b> The management ports are on the front panel of the QFX3500 switch. They are labeled <b>C0</b> and <b>C1</b> on the front panel. In the CLI they are referred to as <b>me0</b> and <b>me1</b>.</p> <p>See <a href="#">“Configuring a QFX3500 Device as a Standalone Switch” on page 138</a>.</p>                                                                                                                                                                                                                                                  |



Table 522: Troubleshooting on the QFX Series (*continued*)

| Problem Category                   | Symptom or Problem                                                                                                                                                    | Recommended Action                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Software upgrade and configuration | Failed software upgrade.                                                                                                                                              | See <a href="#">“Recovering from a Failed Software Installation” on page 93.</a>                                                                                                                                                                                                                                                                                                                                                                   |
|                                    | Active partition becomes inactive after upgrade.                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                    | Problem with the active configuration file.                                                                                                                           | See the following topics: <ul style="list-style-type: none"> <li>• <a href="#">Loading a Previous Configuration File on page 1122</a></li> <li>• <a href="#">Reverting to the Default Factory Configuration on page 148</a></li> <li>• <a href="#">Reverting to the Rescue Configuration on page 150</a></li> <li>• <a href="#">Performing a Recovery Installation on a QFX3008-I, QFX3600-I, QFX3600, or QFX3500 Device on page 85</a></li> </ul> |
|                                    | Root password is lost or forgotten.                                                                                                                                   | Recover the root password. See <a href="#">“Recovering the Root Password” on page 1105.</a>                                                                                                                                                                                                                                                                                                                                                        |
| Network interfaces                 | An aggregated Ethernet interface is down.                                                                                                                             | See <a href="#">“Troubleshooting an Aggregated Ethernet Interface” on page 1107.</a>                                                                                                                                                                                                                                                                                                                                                               |
|                                    | Interface on built-in network port is down.                                                                                                                           | See <a href="#">“Troubleshooting Network Interfaces” on page 1106.</a>                                                                                                                                                                                                                                                                                                                                                                             |
|                                    | Interface on port in which SFP or SFP+ transceiver is installed in an SFP+ uplink module is down.                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Ethernet switching                 | A MAC address entry in the Ethernet switching table is not updated after the device with that MAC address has been moved from one interface to another on the switch. | See <a href="#">“Troubleshooting Ethernet Switching” on page 1761.</a>                                                                                                                                                                                                                                                                                                                                                                             |
| Firewall filter                    | Firewall configuration exceeded available Ternary Content Addressable Memory (TCAM) space.                                                                            | See <a href="#">“Troubleshooting Firewall Filter Configuration” on page 4303.</a>                                                                                                                                                                                                                                                                                                                                                                  |

## Alarms

- [Understanding Alarms on page 5825](#)
- [Chassis Alarm Messages on a QFX3500 Device on page 5826](#)
- [Interface Alarm Messages on page 5829](#)

## Understanding Alarms

The QFX Series support different alarm types and severity levels. [Table 523 on page 5826](#) provides a list of alarm terms and definitions that may help you in monitoring the device.



Table 523: Alarm Terms and Definitions

| Term                  | Definition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Alarm                 | Signal alerting you to conditions that might prevent normal operation. On the device, alarm indicators include the LCD panel and LEDs on the front. The LCD panel displays the chassis alarm message count. Blinking amber LEDs indicate yellow alarm conditions for chassis components.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Alarm condition       | Failure event that triggers an alarm.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Alarm severity levels | <p>Seriousness of the alarm. The level of severity can be either major (red) or minor (yellow).</p> <ul style="list-style-type: none"> <li>Major (red)—Indicates a critical situation on the device that has resulted from one of the following conditions. A red alarm condition requires immediate action. <ul style="list-style-type: none"> <li>One or more hardware components have failed.</li> <li>One or more hardware components have exceeded temperature thresholds.</li> <li>An alarm condition configured on an interface has triggered a critical warning.</li> </ul> </li> <li>Minor (yellow or amber)—Indicates a noncritical condition on the device that, if left unchecked, might cause an interruption in service or degradation in performance. A yellow alarm condition requires monitoring or maintenance. For example, a missing rescue configuration generates a yellow system alarm.</li> </ul> |
| Alarm types           | <p>Alarms include the following types:</p> <ul style="list-style-type: none"> <li>Chassis alarm—Predefined alarm triggered by a physical condition on the device such as a power supply failure or excessive component temperature.</li> <li>Interface alarm—Alarm you configure to alert you when an interface link is down. Applies to <b>ethernet</b>, <b>fibre-channel</b>, and <b>management-ethernet</b> interfaces. You can configure a red (major) or yellow (minor) alarm for the link-down condition, or have the condition ignored.</li> <li>System alarm—Predefined alarm triggered by a missing rescue configuration or failure to install a license for a licensed software feature.</li> </ul>                                                                                                                                                                                                             |

#### Related Documentation

- Chassis Alarm Messages on a QFX3008-I Interconnect Device
- [Chassis Alarm Messages on a QFX3500 Device on page 5826](#)
- [Interface Alarm Messages on page 5829](#)

## Chassis Alarm Messages on a QFX3500 Device

Chassis alarms indicate a failure on the device or one of its components. Chassis alarms are preset and cannot be modified.

The chassis alarm message count is displayed on the LCD panel on the front of the device. To view the chassis alarm message text remotely, use the **show chassis lcd** CLI command.

Chassis alarms on QFX3500 devices have two severity levels:

- Major (red)—Indicates a critical situation on the device that has resulted from one of the conditions described in [Table 524 on page 5827](#). A red alarm condition requires immediate action.



- Minor (yellow or amber)—Indicates a noncritical condition on the device that, if left unchecked, might cause an interruption in service or degradation in performance. A yellow alarm condition requires monitoring or maintenance.

Table 524 on page 5827 describes the chassis alarm messages on QFX3500 devices.

**Table 524: QFX3500 Chassis Alarm Messages**

| Component | Alarm Type  | CLI Message                               | Recommended Action                                                                                                                                                                                                                                                                                                        |
|-----------|-------------|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Fans      | Major (red) | <b>Fan/Blower Absent</b>                  | The fan is missing. Install a fan.                                                                                                                                                                                                                                                                                        |
|           |             | <b>Fan Failure</b>                        | Replace the fan and report the failure to customer support.                                                                                                                                                                                                                                                               |
|           |             | <b>Fan I2C Failure</b>                    | Check the system log for one of the following messages and report the error message to customer support: <ul style="list-style-type: none"> <li>• <b>CM ENV Monitor: Get fan speed failed.</b></li> <li>• <b><i>Fan-number</i> is NOT spinning @ correct speed</b>, where <i>fan-number</i> may be 1, 2, or 3.</li> </ul> |
|           |             | <b>Fan <i>fan-number</i> Not Spinning</b> | Remove and check the fan for obstructions, and then reinsert the fan. If the problem persists, replace the fan.                                                                                                                                                                                                           |



Table 524: QFX3500 Chassis Alarm Messages (*continued*)

| Component      | Alarm Type     | CLI Message                                                       | Recommended Action                                                                                                                                                                                                                                                                                                                                                                   |
|----------------|----------------|-------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supplies | Major (red)    | <b>PEM <i>pem-number</i> Airflow not matching Chassis Airflow</b> | The power supply airflow direction is the opposite of the chassis airflow direction. Replace the power supply with a power supply that supports the same airflow direction as the chassis.                                                                                                                                                                                           |
|                |                | <b>PEM <i>pem-number</i> I2C Failure</b>                          | Check the system log for one of the following messages and report the error message to customer support: <ul style="list-style-type: none"> <li><b>I2C Read failed for device <i>number</i>,</b> where <i>number</i> may be from 123 to 125.</li> <li><b>PS <i>number</i>: Transitioning from online to offline,</b> where power supply (PS) <i>number</i> may be 1 or 2.</li> </ul> |
|                |                | <b>PEM <i>pem-number</i> is not powered</b>                       | For information only. Check the power cord connection and reconnect it if necessary.                                                                                                                                                                                                                                                                                                 |
|                |                | <b>PEM <i>pem-number</i> is not supported</b>                     | Indicates a power supply problem, or the power supply is not supported on the device. Report the problem to customer support.                                                                                                                                                                                                                                                        |
|                |                | <b>PEM <i>pem-number</i> Not OK</b>                               | Indicates a problem with the incoming AC or outgoing DC power. Replace the power supply.                                                                                                                                                                                                                                                                                             |
|                | Minor (yellow) | <b>PEM <i>pem-number</i> Absent</b>                               | For information only. Indicates the device was powered on with two power supplies installed, but now one is missing. The device can continue to operate with a single power supply. If you wish to remove this alarm message, reboot the device with one power supply.                                                                                                               |
|                |                | <b>PEM <i>pem-number</i> Power Supply Type Mismatch</b>           | For information only. Indicates that an AC power supply and DC power supply have been installed in the same chassis. If you wish to remove this alarm message, reboot the device with two AC power supplies or two DC power supplies.                                                                                                                                                |
|                |                | <b>PEM <i>pem-number</i> Removed</b>                              | For information only. Indicates the device was powered on with two power supplies installed, but one has been removed. The device can continue to operate with a single power supply. If you wish to remove this alarm message, reboot the device with one power supply.                                                                                                             |



Table 524: QFX3500 Chassis Alarm Messages (*continued*)

| Component           | Alarm Type     | CLI Message                                 | Recommended Action                                                                                                                                                                                                                          |
|---------------------|----------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature sensors | Major (red)    | <i>sensor-location</i> Temp Sensor Fail     | Check the system log for the following message and report it to customer support:<br><br><b>Temp sensor <i>sensor-number</i> failed</b> , where <i>sensor-number</i> may range from 1 through 10.                                           |
|                     |                | <i>sensor-location</i> Temp Sensor Too Hot  | Check environmental conditions and alarms on other devices. Ensure that environmental factors (such as hot air blowing around the equipment) are not affecting the temperature sensor. If the condition persists, the device may shut down. |
|                     | Minor (yellow) | <i>sensor-location</i> Temp Sensor Too Warm | For information only. Check environmental conditions and alarms on other devices. Ensure that environmental factors (such as hot air blowing around the equipment) are not affecting the temperature sensor.                                |

#### Related Documentation

- Front Panel of a QFX3500 Device
- [Configuring the Junos OS to Determine Conditions That Trigger Alarms on Different Interface Types on page 125](#)
- [alarm on page 2048](#)

## Interface Alarm Messages

Interface alarms are alarms that you configure to alert you when an interface is down.

To configure an interface link-down condition to trigger a red or yellow alarm, or to configure the link-down condition to be ignored, use the **alarm** statement at the **[edit chassis]** hierarchy level. You can specify the **ethernet**, **fibre-channel**, or **management-ethernet** interface type.



**NOTE:** Fibre Channel alarms are only valid on QFX3500 devices.

By default, major alarms are configured for interface link-down conditions on the control plane and management network interfaces in a QFabric system. The link-down alarms indicate that connectivity to the control plane network is down. You can configure these alarms to be ignored using the **alarm** statement at the **[edit chassis]** hierarchy level.





NOTE: If you configure a yellow alarm on the QFX3008-I Interconnect device, it will be handled as a red alarm.

**Related  
Documentation**

- [Understanding Alarms on page 5825](#)



# Administration

- [Routine Monitoring Using the CLI on page 5831](#)

## Routine Monitoring Using the CLI

---

- [Monitoring SNMP on page 5831](#)
- [Tracing SNMP Activity on a Device Running Junos OS on page 5833](#)
- [Monitoring RMON MIB Tables on page 5836](#)
- [Displaying a Log File from a Single-Chassis System on page 5837](#)
- [Monitoring System Log Messages on page 5838](#)
- [Monitoring Traffic Through the Router or Switch on page 5839](#)
- [Pinging Hosts on page 5841](#)

## Monitoring SNMP

There are several commands that you can access in Junos OS operational mode to monitor SNMP information. Some of the commands are:

- **show snmp health-monitor**, which displays the health monitor log and alarm information.
- **show snmp mib**, which displays information from the MIBs, such as device and system information.
- **show snmp statistics**, which displays SNMP statistics such as the number of packets, silent drops, and invalid output values.
- **show snmp rmon**, which displays the RMON alarm, event, history, and log information

The following example provides sample output from the **show snmp health-monitor** command:

```
user@switch> show snmp health-monitor
```

```
Alarm
```

| Index | Variable description                                                         | Value | State  |
|-------|------------------------------------------------------------------------------|-------|--------|
| 32768 | Health Monitor: root file system utilization<br>jnxHrStoragePercentUsed.1    | 58    | active |
| 32769 | Health Monitor: /config file system utilization<br>jnxHrStoragePercentUsed.2 | 0     | active |



```
32770 Health Monitor: RE 0 CPU utilization
      jnxOperatingCPU.9.1.0.0                0 active

32773 Health Monitor: RE 0 Memory utilization
      jnxOperatingBuffer.9.1.0.0            35 active

32775 Health Monitor: jkernel daemon CPU utilization
      Init daemon                          0 active
      Chassis daemon                      50 active
      Firewall daemon                     0 active
      Interface daemon                    5 active
      SNMP daemon                         11 active
      MIB2 daemon                         42 active
      ...
```

The following example provides sample output from the **show snmp mib** command:

```
user@switch> show snmp mib walk system
```

```
sysDescr.0    = Juniper Networks, Inc. qfx3500s internet router, kernel
JUNOS 11.1-20100926.0 #0: 2010-09-26 06:17:38 UTC builder@abc.juniper.net:
/volume/build/junos/11.1/production/20100926.0/obj-xlr/bsd/sys/compile/JUNIPER-xxxxx
```

```
Build date: 2010-09-26 06:00:10 U
sysObjectID.0 = jnxProductQFX3500
sysUpTime.0   = 24444184
sysContact.0  = J Smith
sysName.0     = Lab QFX3500
sysLocation.0 = Lab
sysServices.0 = 4
```

The following example provides sample output from the **show snmp statistics** command:

```
user@switch> show snmp statistics
```

```
SNMP statistics:
  Input:
    Packets: 0, Bad versions: 0, Bad community names: 0,
    Bad community uses: 0, ASN parse errors: 0,
    Too bigs: 0, No such names: 0, Bad values: 0,
    Read onlys: 0, General errors: 0,
    Total request varbinds: 0, Total set varbinds: 0,
    Get requests: 0, Get nexts: 0, Set requests: 0,
    Get responses: 0, Traps: 0,
    Silent drops: 0, Proxy drops: 0, Commit pending drops: 0,
    Throttle drops: 0, Duplicate request drops: 0
  Output:
    Packets: 0, Too bigs: 0, No such names: 0,
    Bad values: 0, General errors: 0,
    Get requests: 0, Get nexts: 0, Set requests: 0,
    Get responses: 0, Traps: 0
```

- Related Documentation
- [health-monitor on page 1288](#)
  - [show snmp mib on page 5790](#)
  - [show snmp statistics on page 1370](#)



## Tracing SNMP Activity on a Device Running Junos OS

SNMP tracing operations track activity for SNMP agents and record the information in log files. The logged error descriptions provide detailed information to help you solve problems faster.

By default, Junos OS does not trace any SNMP activity. If you include the **traceoptions** statement at the **[edit snmp]** hierarchy level, the default tracing behavior is:

- Important activities are logged in files located in the **/var/log** directory. Each log is named after the SNMP agent that generates it. Currently, the following log files are created in the **/var/log** directory when the **traceoptions** statement is used:
  - chassisd
  - craftd
  - ilmid
  - mib2d
  - rmopd
  - serviced
  - snmpd
- When a trace file named **filename** reaches its maximum size, it is renamed **filename.0**, then **filename.1**, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten. (For more information about how log files are created, see the *Junos OS System Log Messages Reference*.)
- Log files can be accessed only by the user who configured the tracing operation.

You cannot change the directory (**/var/log**) in which trace files are located. However, you can customize the other trace file settings by including the following statements at the **[edit snmp]** hierarchy level:

```
[edit snmp]
traceoptions {
    file <files number> <match regular-expression> <size size> <world-readable |
    no-world-readable>;
    flag flag;
    no-remote-trace;
}
```

These statements are described in the following sections:

- [Configuring the Number and Size of SNMP Log Files on page 5834](#)
- [Configuring Access to the Log File on page 5834](#)
- [Configuring a Regular Expression for Lines to Be Logged on page 5834](#)
- [Configuring the Trace Operations on page 5834](#)



### Configuring the Number and Size of SNMP Log Files

---

By default, when the trace file reaches 128 kilobytes (KB) in size, it is renamed *filename.0*, then *filename.1*, and so on, until there are three trace files. Then the oldest trace file (*filename.2*) is overwritten.

You can configure the limits on the number and size of trace files by including the following statements at the **[edit snmp traceoptions]** hierarchy level:

```
[edit snmp traceoptions]
file files number size size;
```

For example, set the maximum file size to 2 MB, and the maximum number of files to 20. When the file that receives the output of the tracing operation (*filename*) reaches 2 MB, *filename* is renamed *filename.0*, and a new file called *filename* is created. When the new *filename* reaches 2 MB, *filename.0* is renamed *filename.1* and *filename* is renamed *filename.0*. This process repeats until there are 20 trace files. Then the oldest file (*filename.19*) is overwritten by the newest file (*filename.0*).

The number of files can be from 2 through 1000 files. The file size of each file can be from 10 KB through 1 gigabyte (GB).

### Configuring Access to the Log File

---

By default, log files can be accessed only by the user who configured the tracing operation.

To specify that any user can read all log files, include the **file world-readable** statement at the **[edit snmp traceoptions]** hierarchy level:

```
[edit snmp traceoptions]
file world-readable;
```

To explicitly set the default behavior, include the **file no-world-readable** statement at the **[edit snmp traceoptions]** hierarchy level:

```
[edit snmp traceoptions]
file no-world-readable;
```

### Configuring a Regular Expression for Lines to Be Logged

---

By default, the trace operation output includes all lines relevant to the logged activities.

You can refine the output by including the **match** statement at the **[edit snmp traceoptions file filename]** hierarchy level and specifying a regular expression (regex) to be matched:

```
[edit snmp traceoptions]
file filename match regular-expression;
```

### Configuring the Trace Operations

---

By default, only important activities are logged. You can specify which trace operations are to be logged by including the following **flag** statement (with one or more tracing flags) at the **[edit snmp traceoptions]** hierarchy level:

```
[edit snmp traceoptions]
flag {
  all;
```



```

configuration;
database;
events;
general;
interface-stats;
nonvolatile-sets;
pdu;
policy;
protocol-timeouts;
routing-socket;
server;
subagent;
timer;
varbind-error;
}

```

Table 500 on page 5734 describes the meaning of the SNMP tracing flags.

**Table 525: SNMP Tracing Flags**

| Flag                     | Description                                                                 | Default Setting |
|--------------------------|-----------------------------------------------------------------------------|-----------------|
| <b>all</b>               | Log all operations.                                                         | Off             |
| <b>configuration</b>     | Log reading of the configuration at the <b>[edit snmp]</b> hierarchy level. | Off             |
| <b>database</b>          | Log events involving storage and retrieval in the events database.          | Off             |
| <b>events</b>            | Log important events.                                                       | Off             |
| <b>general</b>           | Log general events.                                                         | Off             |
| <b>interface-stats</b>   | Log physical and logical interface statistics.                              | Off             |
| <b>nonvolatile-set</b>   | Log nonvolatile SNMP set request handling.                                  | Off             |
| <b>pdu</b>               | Log SNMP request and response packets.                                      | Off             |
| <b>policy</b>            | Log policy processing.                                                      | Off             |
| <b>protocol-timeouts</b> | Log SNMP response timeouts.                                                 | Off             |
| <b>routing-socket</b>    | Log routing socket calls.                                                   | Off             |
| <b>server</b>            | Log communication with processes that are generating events.                | Off             |
| <b>subagent</b>          | Log subagent restarts.                                                      | Off             |
| <b>timer</b>             | Log internal timer events.                                                  | Off             |



Table 525: SNMP Tracing Flags (*continued*)

| Flag                 | Description                  | Default Setting |
|----------------------|------------------------------|-----------------|
| <b>varbind-error</b> | Log variable binding errors. | Off             |

To display the end of the log for an agent, issue the **show log agentd | last** operational mode command:

```
[edit]
user@host# run show log agentd | last
```

where **agent** is the name of an SNMP agent.

- Related Documentation**
- [Configuring SNMP on a Device Running Junos OS](#)
  - [Configuration Statements at the \[edit snmp\] Hierarchy Level](#)
  - [Example: Tracing SNMP Activity](#)
  - [Configuring SNMP on page 1223](#)

## Monitoring RMON MIB Tables

**Purpose** Monitor remote monitoring (RMON) alarm, event, and log tables.

**Action** To display the RMON tables:

```
user@switch> show snmp rmon
Alarm
Index  Variable description                               Value State
-----
5 monitor
   jnxOperatingCPU.9.1.0.0                          5 falling threshold

Event
Index  Type                               Last Event
-----
1 log and trap                         2010-07-10 11:34:17 PDT
Event Index: 1
  Description: Event 1 triggered by Alarm 5, rising threshold (90) crossed,
(variable: jnxOperatingCPU.9.1.0.0, value: 100)
  Time: 2010-07-10 11:34:07 PDT
  Description: Event 1 triggered by Alarm 5, falling threshold (75) crossed,
(variable: jnxOperatingCPU.9.1.0.0, value: 5)
  Time: 2010-07-10 11:34:17 PDT
```

**Meaning** The display shows that an alarm has been defined to monitor **jnxRmon** MIB object **jnxOperatingCPU**, which represents the CPU utilization of the Routing Engine. The alarm is configured to generate an event that sends an SNMP trap and adds an entry to the **logTable** in the RMON MIB. The log table shows that two occurrences of the event have been generated—one for rising above a threshold of 90 percent, and one for falling below a threshold of 75 percent.

- Related Documentation**
- [Configuring RMON Alarms and Events on page 5541](#)
  - [show snmp rmon on page 5794](#)



- [show snmp rmon history on page 5798](#)
- [clear snmp statistics on page 5741](#)
- [clear snmp history on page 5740](#)

## Displaying a Log File from a Single-Chassis System

To display a log file stored on a single-chassis system such as the QFX3500 switch, enter Junos OS CLI operational mode and issue the following commands:

```
user@switch> show log log-filename
user@switch> file show log-file-pathname
```

By default, the commands display the file stored on the local Routing Engine.

The following example shows the output from the **show log messages** command:

```
user@switch1> show log messages
Nov  4 11:30:01 switch1 newsyslog[2283]: logfile turned over due to size>128K
Nov  4 11:30:01 switch1 newsyslog[2283]: logfile turned over due to size>128K
Nov  4 11:30:06 switch1 chassism[952]: CM ENV Monitor: set fan speed is 65 percent
for Fan 1
Nov  4 11:30:06 switch1 chassism[952]: CM ENV Monitor: set fan speed is 65 percent
for Fan 2
Nov  4 11:30:06 switch1 chassism[952]: CM ENV Monitor: set fan speed is 65 percent
for Fan 3
...
Nov  4 11:52:53 switch1 snmpd[944]: SNMPD_HEALTH_MON_INSTANCE: Health Monitor:
jroute daemon memory usage (Management
process): new instance detected (variable: sysAppElmtRunMemory.5.6.2293)
Nov  4 11:52:53 switch1 snmpd[944]: SNMPD_HEALTH_MON_INSTANCE: Health Monitor:
jroute daemon memory usage (Command-line
interface): new instance detected (variable: sysAppElmtRunMemory.5.8.2292)
...
Nov  4 12:08:30 switch1 rpdf[957]: task_connect: task BGP_100.10.10.1.6+179 addr
10.10.1.6+179: Can't assign requested
address
Nov  4 12:08:30 switch1 rpdf[957]: bgp_connect_start: connect 10.10.1.6 (Internal
AS 100): Can't assign requested address
Nov  4 12:10:24 switch1 mgd[2293]: UI_CMDLINE_READ_LINE: User 'jsmith', command
'exit '
Nov  4 12:10:27 switch1 mgd[2293]: UI_DBASE_LOGOUT_EVENT: User 'jsmith' exiting
configuration mode
Nov  4 12:10:31 switch1 mgd[2293]: UI_CMDLINE_READ_LINE: User 'jsmith', command
'show log messages'
```

The following example shows the output from the **file show** command. The file in the pathname **/var/log/processes** has been previously configured to include messages from the **daemon** facility.

```
user@switch1> file show /var/log/processes
Feb 22 08:58:24 switch1 snmpd[359]: SNMPD_TRAP_WARM_START: trap_generate_warm:
SNMP trap: warm start
Feb 22 20:35:07 switch1 snmpd[359]: SNMPD_THROTTLE_QUEUE_DRAINED:
trap_throttle_timer_handler: cleared all throttled traps
Feb 23 07:34:56 switch1 snmpd[359]: SNMPD_TRAP_WARM_START: trap_generate_warm:
SNMP trap: warm start
Feb 23 07:38:19 switch1 snmpd[359]: SNMPD_TRAP_COLD_START: trap_generate_cold:
```



```
SNMP trap: cold start
...
```

- Related Documentation**
- [Interpreting Messages Generated in Standard Format on page 5563](#)
  - [Interpreting Messages Generated in Structured-Data Format on page 5560](#)

## Monitoring System Log Messages

**Purpose** Display system log messages about the QFX Series. By looking through a system log file for any entries pertaining to the interface that you are interested in, you can further investigate a problem with an interface on the switch.

**Action** To view system log messages:

```
user@switch1> show log messages
```

### Sample Output

```
Nov  4 11:30:01 switch1 newsyslog[2283]: logfile turned over due to size>128K
Nov  4 11:30:01 switch1 newsyslog[2283]: logfile turned over due to size>128K
Nov  4 11:30:06 switch1 chassism[952]: CM ENV Monitor: set fan speed is 65 percent
for Fan 1
Nov  4 11:30:06 switch1 chassism[952]: CM ENV Monitor: set fan speed is 65 percent
for Fan 2
Nov  4 11:30:06 switch1 chassism[952]: CM ENV Monitor: set fan speed is 65 percent
for Fan 3
...
Nov  4 11:52:53 switch1 snmpd[944]: SNMPD_HEALTH_MON_INSTANCE: Health Monitor:
jroute daemon
memory usage (Management process): new instance detected (variable:
sysApp1ElmtRunMemory.5.6.2293)
Nov  4 11:52:53 switch1 snmpd[944]: SNMPD_HEALTH_MON_INSTANCE: Health Monitor:
jroute daemon
memory usage (Command-line interface): new instance detected (variable:
sysApp1ElmtRunMemory.5.8.2292)
...
Nov  4 12:10:24 switch1 mgd[2293]: UI_CMDLINE_READ_LINE: User 'jsmith', command
'exit '
Nov  4 12:10:27 switch1 mgd[2293]: UI_DBASE_LOGOUT_EVENT: User 'jsmith' exiting
configuration mode
Nov  4 12:10:31 switch1 mgd[2293]: UI_CMDLINE_READ_LINE: User 'jsmith', command
'show log messages'
```

**Meaning** The sample output shows the following entries in the **messages** file:

- A new log file was created when the previous file reached the maximum size of 128 kilobytes (KB).
- The fan speed for Fan 1, 2, and 3 is set at 65 percent.
- Health monitoring activity is detected.
- CLI commands were entered by the user **jsmith**.



## Monitoring Traffic Through the Router or Switch

To help with the diagnosis of a problem, display real-time statistics about the traffic passing through physical interfaces on the router or switch.

To display real-time statistics about physical interfaces, perform these tasks:

1. [Displaying Real-Time Statistics About All Interfaces on the Router or Switch on page 5839](#)
2. [Displaying Real-Time Statistics About an Interface on the Router or Switch on page 5839](#)

### Displaying Real-Time Statistics About All Interfaces on the Router or Switch

**Purpose** Display real-time statistics about traffic passing through all interfaces on the router or switch.

**Action** To display real-time statistics about traffic passing through all interfaces on the router or switch:

```
user@host> monitor interface traffic
```

### Sample Output

```
user@host> monitor interface traffic
host name                               Seconds: 15                               Time: 12:31:09
Interface  Link  Input packets  (pps)  Output packets  (pps)
so-1/0/0   Down    0              (0)      0              (0)
so-1/1/0   Down    0              (0)      0              (0)
so-1/1/1   Down    0              (0)      0              (0)
so-1/1/2   Down    0              (0)      0              (0)
so-1/1/3   Down    0              (0)      0              (0)
t3-1/2/0   Down    0              (0)      0              (0)
t3-1/2/1   Down    0              (0)      0              (0)
t3-1/2/2   Down    0              (0)      0              (0)
t3-1/2/3   Down    0              (0)      0              (0)
so-2/0/0   Up      211035         (1)      36778          (0)
so-2/0/1   Up      192753         (1)      36782          (0)
so-2/0/2   Up      211020         (1)      36779          (0)
so-2/0/3   Up      211029         (1)      36776          (0)
so-2/1/0   Up      189378         (1)      36349          (0)
so-2/1/1   Down    0              (0)      18747          (0)
so-2/1/2   Down    0              (0)      16078          (0)
so-2/1/3   Up      0              (0)      80338          (0)
at-2/3/0   Up      0              (0)      0              (0)
at-2/3/1   Down    0              (0)      0              (0)
Bytes=b, Clear=c, Delta=d, Packets=p, Quit=q or ESC, Rate=r, Up=^U, Down=^D
```

**Meaning** The sample output displays traffic data for active interfaces and the amount that each field has changed since the command started or since the counters were cleared by using the **C** key. In this example, the **monitor interface** command has been running for 15 seconds since the command was issued or since the counters last returned to zero.

### Displaying Real-Time Statistics About an Interface on the Router or Switch

**Purpose** Display real-time statistics about traffic passing through an interface on the router or switch.



**Action** To display traffic passing through an interface on the router or switch, use the following Junos OS CLI operational mode command:

```
user@host> monitor interface interface-name
```

## Sample Output

```
user@host> monitor interface so-0/0/1
Next='n', Quit='q' or ESC, Freeze='f', Thaw='t', Clear='c', Interface='i'
R1
Interface: so-0/0/1, Enabled, Link is Up
Encapsulation: PPP, Keepalives, Speed: OC3 Traffic statistics:
  Input bytes:                5856541 (88 bps)
  Output bytes:               6271468 (96 bps)
  Input packets:              157629 (0 pps)
  Output packets:             157024 (0 pps)
Encapsulation statistics:
  Input keepalives:           42353
  Output keepalives:          42320
LCP state: Opened
Error statistics:
  Input errors:                0
  Input drops:                 0
  Input framing errors:        0
  Input runs:                  0
  Input giants:                0
  Policed discards:            0
  L3 incompletes:              0
  L2 channel errors:           0
  L2 mismatch timeouts:        0
  Carrier transitions:         1
  Output errors:               0
  Output drops:                0
  Aged packets:                0
Active alarms : None
Active defects: None
SONET error counts/seconds:
  LOS count                    1
  LOF count                    1
  SEF count                    1
  ES-S                         77
  SES-S                        77
SONET statistics:
  BIP-B1                       0
  BIP-B2                       0
  REI-L                        0
  BIP-B3                       0
  REI-P                        0
Received SONET overhead:  F1      : 0x00  J0      : 0xZ
```

**Meaning** The sample output shows the input and output packets for a particular SONET interface (**so-0/0/1**). The information can include common interface failures, such as SONET/SDH and T3 alarms, loopbacks detected, and increases in framing errors. For more information, see Checklist for Tracking Error Conditions.

To control the output of the command while it is running, use the keys shown in [Table 499 on page 5727](#).



Table 526: Output Control Keys for the monitor interface Command

| Action                                                                                                                                                                                                                       | Key      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| Display information about the next interface. The <b>monitor interface</b> command scrolls through the physical or logical interfaces in the same order that they are displayed by the <b>show interfaces terse</b> command. | <b>N</b> |
| Display information about a different interface. The command prompts you for the name of a specific interface.                                                                                                               | <b>I</b> |
| Freeze the display, halting the display of updated statistics.                                                                                                                                                               | <b>F</b> |
| Thaw the display, resuming the display of updated statistics.                                                                                                                                                                | <b>T</b> |
| Clear (zero) the current delta counters since <b>monitor interface</b> was started. It does not clear the accumulative counter.                                                                                              | <b>C</b> |
| Stop the <b>monitor interface</b> command.                                                                                                                                                                                   | <b>Q</b> |

See the Junos OS Operational Mode Commands for details on using match conditions with the **monitor traffic** command.

## Pinging Hosts

**Purpose** Use the CLI **ping** command to verify that a host can be reached over the network. This command is useful for diagnosing host and network connectivity problems. The switch sends a series of Internet Control Message Protocol (ICMP) echo (ping) requests to a specified host and receives ICMP echo responses.

**Action** To use the **ping** command to send four requests (ping count) to **host3**:  
**ping host count number**

## Sample Output

```
ping host3 count 4
user@switch> ping host3 count 4
PING host3.site.net (176.26.232.111): 56 data bytes
64 bytes from 176.26.232.111: icmp_seq=0 ttl=122 time=0.661 ms
64 bytes from 176.26.232.111: icmp_seq=1 ttl=122 time=0.619 ms
64 bytes from 176.26.232.111: icmp_seq=2 ttl=122 time=0.621 ms
64 bytes from 176.26.232.111: icmp_seq=3 ttl=122 time=0.634 ms

--- host3.site.net ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max/stddev = 0.619/0.634/0.661/0.017 ms
```

**Meaning**

- The **ping** results show the following information:
  - Size of the ping response packet (in bytes).
  - IP address of the host from which the response was sent.



- Sequence number of the ping response packet. You can use this value to match the ping response to the corresponding ping request.
- Time-to-live (ttl) hop-count value of the ping response packet.
- Total time between the sending of the ping request packet and the receiving of the ping response packet, in milliseconds. This value is also called round-trip time.
- Number of ping requests (probes) sent to the host.
- Number of ping responses received from the host.
- Packet loss percentage.
- Round-trip time statistics: minimum, average, maximum, and standard deviation of the round-trip time.



## CHAPTER 68

# Troubleshooting

- [Junos OS Basics on page 5843](#)
- [Configuration and File Management on page 5856](#)
- [Ethernet Switching on page 5859](#)
- [High Availability on page 5864](#)
- [Interfaces on page 5864](#)
- [Layer 3 Protocols on page 5865](#)
- [Security on page 5866](#)
- [Services on page 5873](#)
- [Storage on page 5875](#)
- [Traffic Management on page 5880](#)

## Junos OS Basics

---

- [Rebooting and Halting a QFX Series Product on page 5843](#)
- [Recovering from a Failed Software Installation on page 5844](#)
- [Recovering the Root Password on page 5845](#)
- [Creating an Emergency Boot Device for a QFX Series Device on page 5847](#)
- [Performing a Recovery Installation on a QFX3008-I, QFX3600-I, QFX3600, or QFX3500 Device on page 5848](#)
- [Performing a QFabric System Recovery Installation on the Director Group on page 5850](#)

## Rebooting and Halting a QFX Series Product

To reboot the switch, issue the **request system reboot** command.

```
user@switch> request system reboot ?
```

Possible completions:

|           |                                             |
|-----------|---------------------------------------------|
| <[Enter]> | Execute this command                        |
| at        | Time at which to perform the operation      |
| in        | Number of minutes to delay before operation |
| media     | Boot media for next boot                    |
| message   | Message to display to all users             |
|           | Pipe through a command                      |

```
user@switch> request system reboot
```



```
Reboot the system ? [yes,no] (no) yes
Rebooting switch
```

Similarly, to halt the switch, issue the **request system halt** command.



**CAUTION:** Before entering this command, you must have access to the switch's console port in order to bring up the Routing Engine.

```
user@switch> request system halt ?
Possible completions:
<[Enter]>      Execute this command
at             Time at which to perform the operation
in            Number of minutes to delay before operation
media         Boot media for next boot
message       Message to display to all users
|             Pipe through a command
```



**NOTE:** When you issue this command on an individual component in a QFabric system, you will receive a warning that says “Hardware-based members will halt, Virtual Junos Routing Engines will reboot.” If you want to halt only one member, use the member option. You cannot issue this command from the QFabric CLI.

Issuing the **request system halt** command on the switch halts the Routing Engine. To reboot a Routing Engine that has been halted, you must connect through the console.

**Related  
Documentation**

- [clear system reboot on page 290](#)
- [request system reboot on page 344](#)
- [request system halt on page 331](#)
- [request system power-off on page 340](#)
- [Connecting a QFX Series Device to a Management Console](#)

## Recovering from a Failed Software Installation

**Problem** If the Junos OS appears to have been installed but the CLI does not work, or if the switch has no software installed, you can use this recovery installation procedure to install the Junos OS.

**Solution** If a Junos OS image already exists on the switch, you can either install the new Junos OS package in a separate partition, in which case both Junos OS images remain on the switch, or you can remove the existing Junos OS image before you start the new installation process.

To perform a recovery installation:

1. Power on the switch. The loader script starts.



2. After the message **Loading /boot/defaults/loader.conf** appears, you are prompted with the following message:

**Hit [Enter] to boot immediately, or space bar for command prompt.**

Press the Spacebar to enter the manual loader. The **loader>** prompt appears.

3. Enter the following command:

```
loader> install [- --format] [- --external] source
```

where:

- **format**—Enables you to erase the installation media before installing the installation package. If you do not include this option, the system installs the new Junos OS in a different partition from that of the most recently installed Junos OS.
- **external**—Installs the installation package onto external media (a USB stick, for example).
- **source**—Represents the name and location of the Junos OS package, either on a server on the network or as a file on an external media, as shown in the following two examples:
  - Network address of the server and the path on the server; for example, **ftp://192.171.28/junos/jinstall-qfx-11.1R1.5-domestic-signed.tgz**
  - Junos OS package on a USB device (commonly stored in the root drive as the only file), for example, **file:///jinstall-qfx-11.1R1.5-domestic-signed.tgz**.

The installation now proceeds normally and ends with a login prompt.

## Recovering the Root Password

If you forget the root password for the QFX3500 switch, you can use the password recovery procedure to reset the root password.



**NOTE:** The root password cannot be recovered on a QFabric system.



**NOTE:** You need console access to the switch to recover the root password.

To recover the root password:

1. Power off the switch by switching off the AC power outlet of the device or, if necessary, by pulling the power cords out of the QFX3500 switch power supplies.
2. Turn off the power to the management device, such as a PC or laptop computer, that you want to use to access the CLI.
3. Plug one end of the Ethernet rollover cable supplied with the switch into the RJ-45-to-DB-9 serial port adapter supplied with the switch.



4. Plug the RJ-45-to-DB-9 serial port adapter into the serial port on the management device.
5. Connect the other end of the Ethernet rollover cable to the console port on the switch.
6. Turn on the power to the management device.
7. On the management device, start your asynchronous terminal emulation application (such as Microsoft Windows Hyperterminal) and select the appropriate **COM** port to use (for example, **COM1**).
8. Configure the port settings as follows:

- Bits per second: 9600
- Data bits: 8
- Parity: None
- Stop bits: 1
- Flow control: None

9. Power on the switch by (if necessary) plugging the power cords into the QFX3500 switch power supply, or turning on the power to the device or switch by switching on the AC power outlet the device is plugged into

The terminal emulation screen on your management device displays the switch's boot sequence.

10. When the following prompt appears, press the Spacebar to access the switch's bootstrap loader command prompt:

```
Hit [Enter] to boot immediately, or space bar for command prompt.  
Booting [kernel] in 9 seconds...
```

11. At the following prompt, enter **boot -s** to start up the system in single-user mode.

```
ok boot-s
```

12. At the following prompt, enter **recovery** to start the root password recovery procedure.

```
Enter full pathname of shell or 'recovery' for root password recovery or RETURN  
for /bin/sh: recovery
```

13. Enter configuration mode in the CLI.

14. Set the root password. For example:

```
user@switch# set system root-authentication plain-text-password
```

15. At the following prompt, enter the new root password. For example:

```
New password: juniper1  
Retype new password:
```

16. At the second prompt, reenter the new root password.

17. After you have finished configuring the password, commit the configuration.

```
root@host# commit  
commit complete
```

18. Exit configuration mode in the CLI.



19. Exit operational mode in the CLI.
  20. At the prompt, enter **y** to reboot the switch.
- ```
Reboot the system? [y/n] y
```

**Related  
Documentation**

- [Configuring the Root Password on page 1222](#)

## Creating an Emergency Boot Device for a QFX Series Device

If Junos OS on the QFX Series is damaged in some way that prevents the software from loading properly, you can use an emergency boot device to repartition the primary disk and load a fresh installation of Junos OS. Use the following procedure to create an emergency boot device.

Before you begin, you need to download the installation media image for your device and Junos OS release from <http://www.juniper.net/customers/support/>.



**NOTE:** In the following procedure, we assume that you are creating the emergency boot device on a QFX3500 device. You can create the emergency boot device on another Juniper Networks switch or router, or any PC or laptop that supports Linux. The steps you take to create the emergency boot device vary, depending on the device.

To create an emergency boot device from a QFX3500 device:

1. Use FTP to copy the installation media image into the **/var/tmp** directory on the QFX3500 device.
2. Insert a USB device into the USB port.
3. From the Junos OS command-line interface (CLI), start the shell:

```
user@device> start shell
%
```

4. Switch to the root account using the **su** command:

```
% su
Password: password
```



**NOTE:** The password is the root password for the QFX3500 device. If you logged in to the device as root, you do not need to perform this step.

5. Enter the following command:

```
root@device% dd if=/var/tmp/filename of=/dev/da1 bs=16k
```

The device writes the installation media image to the USB device:

```
root@device% dd if=/var/tmp/install-media-qfx3500.junos_11.1 of=/dev/da1 bs=16k
11006+1 records in
```



```
11006+1 records out
180332544 bytes transferred in 71.764266 secs (2512846 bytes/sec)
```

6. Log out of the shell:

```
root@device% exit
% exit
user@device>
```

#### Related Documentation

- [USB Port Specifications for the QFX Series](#)
- [Performing a Recovery Installation on a QFX3008-I, QFX3600-I, QFX3600, or QFX3500 Device on page 85](#)
- [Performing a QFabric System Recovery Installation on the Director Group on page 87](#)

## Performing a Recovery Installation on a QFX3008-I, QFX3600-I, QFX3600, or QFX3500 Device

If Junos OS on your device is damaged in some way that prevents the software from loading correctly, you may need to perform a recovery installation using an emergency boot device (for example, a USB flash drive) to restore the default factory installation. Once you have recovered the software, you need to restore the device configuration. You can either create a new configuration as you did when the device was shipped from the factory, or if you saved the previous configuration, you can simply restore that file to the device.

If at all possible, you should try to perform the following steps before you perform the recovery installation:

1. Ensure that you have an emergency boot device to use during the installation. See [“Creating an Emergency Boot Device for a QFX Series Device” on page 140](#) for information on how to create an emergency boot device.
2. Copy the existing configuration in the file `/config/juniper.conf.gz` from the device to a remote system, such as a server, or to an emergency boot device. For extra safety, you can also copy the backup configurations (the files named `/config/juniper.conf.n`, where *n* is a number from 0 through 9) to a remote system or to an emergency boot device.



**WARNING:** The recovery installation process completely overwrites the entire contents of the internal flash storage.

3. Copy any other stored files to a remote system as desired.

To reinstall Junos OS:

1. Insert the emergency boot device into the QFX Series device.
2. Reboot the QFX Series device.



**NOTE:** Do not power off the device if it is already on.



```
[edit system]
user@device> request system reboot
```

If you do not have access to the CLI, power cycle the QFX Series device.

The emergency boot device (external USB install media) is detected. At this time, you can load the Junos OS from the emergency boot device onto the internal flash storage.

3. The software prompts you with the following options:

```
External USB install media detected.
You can load Junos from this media onto an internal drive.
Press 'y' to proceed, 'f' to format and install, or 'n' to abort.
Do you wish to continue ([y]/f/n)? f
```

4. Type **f** to format the internal flash storage and install the Junos OS on the emergency boot device onto the internal flash storage.

If you do not want to format the internal flash storage, type **y**.

The following messages are displayed:

```
Installing packages from external USB drive da1
Packages will be installed to da0, media size: 8G
```

```
Processing format options
Fri September 4 01:18:44 UTC 2012
```

```
-- IMPORTANT INFORMATION --
Installer has detected settings to format system boot media.
This operation will erase all data from your system.
```

```
Formatting installation disk .. this will take a while, please wait
Disabling platform watchdog - threshold 12 mins
```

```
Determining installation slice
Fri September 4 01:27:07 UTC 2012
```

5. The device copies the software from the emergency boot device, occasionally displaying status messages. Copying the software can take up to 12 minutes.

When the device is finished copying the software, you are presented with the following prompt:

```
*** Fri September 4 01:19:00 UTC 2012***
Installation successful..
Please select one of the following options:
Reboot to installed Junos after removing install media (default) ... 1
Reboot to installed Junos by disabling install media ..... 2
Exit to installer debug shell ..... 3
Install Junos to alternate slice ..... 4
Your choice: 4
NOTE: System installer will now install Junos to alternate slice
Do not power off or remove the external installer media or
interrupt the installation mechanism.
```

6. Select **4** to install Junos OS to the alternate slice of the partition, and then press Enter.



7. Remove the emergency boot device when prompted and then press Enter. The device then reboots from the internal flash storage on which the software was just installed. When the reboot is complete, the device displays the login prompt.
8. Create a new configuration as you did when the device was shipped from the factory, or restore the previously saved configuration file to the device.

**Related  
Documentation**

- [Creating an Emergency Boot Device for a QFX Series Device on page 140](#)

## Performing a QFabric System Recovery Installation on the Director Group

If the software on your QFabric system is damaged in some way that prevents the software from loading correctly, or you need to upgrade the software on your QFabric system, you may need to perform a recovery installation on the Director group.

If possible, perform the following steps before you perform the recovery installation:

1. Ensure that you have an emergency boot device (for example, an external USB flash drive) for each of your Director devices to use during the recovery installation.

You can either use the external USB flash drive containing the software supplied by Juniper Networks, or you can use an external USB flash drive supplied by Juniper Networks on which you install the QFabric system install media.

2. Because the recovery installation process completely overwrites the entire contents of the Director device, make sure you back up any configuration files and initial setup information on a different external USB flash drive before you begin a recovery installation. You will need to restore this information as part of recovery process.

Use the **request system software configuration-backup** command to back up your configuration files and initial setup information:

```
user@switch> request system software configuration-backup path
```



**NOTE:** To recover the Director group, you must upgrade both Director devices in parallel. If you are recovering only one Director device in a Director group, and the software version will remain the same between the two Director devices, make sure that the other Director device is powered on and operational. If the software version of the Director device you are recovering will be different, make sure that the other Director device is powered off and is not operational.

- [\(Optional\) Creating an Emergency Boot Device Using a Juniper Networks External Blank USB Flash Drive on page 5851](#)
- [Performing a Recovery Installation Using a Juniper Networks External USB Flash Drive with Preloaded Software on page 5852](#)



### (Optional) Creating an Emergency Boot Device Using a Juniper Networks External Blank USB Flash Drive

If you do not have an external USB flash drive preloaded with the software from Juniper Networks to use as an emergency boot device, you can create your own, using a blank external USB flash drive provided by Juniper Networks. Download the install media from the Juniper Networks Support website onto your UNIX workstation, uncompress and untar the software, and then burn the software image onto your Juniper Networks external USB (4-gigabyte) flash drive. Make sure you create two emergency boot devices, one for each Director device, so you can perform a recovery installation in parallel.

1. In a browser, go to <http://www.juniper.net/support/downloads/junos.html>.

The **Junos Platforms Download Software** page appears.

2. In the **QFX Series** section of the **Junos Platforms - Download Software** download page, select the QFX Series platform software you want to download.
3. Select the number of the software version that you want to download in the **Release:** pull-down window to the right of the tabs on the **Download Software** page.
4. Click the **Software** tab and select the complete install media you want to download in the **QFabric System Install Media** section.

A login screen appears.

5. Enter your name and password and press **Enter**.
6. Read the End User License Agreement, click the **I agree** radio button, and then click **Proceed**.
7. Log in and save the install media file to your UNIX workstation.
8. Use FTP to access the UNIX workstation where the install media resides.

```
ftp ftp://hostname/pathname install-media-qfabric-<version>.img.tgz
```

9. When prompted, enter your username and password.
10. Make sure you are in binary mode by entering **binary** at the prompt.

**binary**

11. Use the **get** command to transfer the installation package from the FTP host to your UNIX workstation.

```
get install-media-qfabric-<version>.img.tgz
```

12. Close the FTP session:

**bye**

13. Untar the *install-media-qfabric-<version>.img.tgz* file on your UNIX workstation.

```
tar -xvzf install-media-qfabric-11.3X30.6.img.tgz
```

14. Insert a blank external USB (4-gigabyte) flash drive supplied by Juniper Networks into your UNIX workstation.

15. Burn the software image you just downloaded to your UNIX workstation onto your external USB flash drive using the **dd** command:

```
dd if=install-media-qfabric-11.3X30.6.img of=/dev/sdb bs=16k
```



```
250880+0 records in
250880+0 records out
4110417920 bytes (4.1 GB) copied, 5.10768 seconds, 805 MB/s
```

16. Perform the steps in [“Performing a Recovery Installation Using a Juniper Networks External USB Flash Drive with Preloaded Software” on page 89](#) to continue with the recovery installation.

### Performing a Recovery Installation Using a Juniper Networks External USB Flash Drive with Preloaded Software

---

This procedure describes how to perform a recovery installation using an external USB flash drive that contains Junos OS software.



**NOTE:** Since the recovery installation process completely overwrites the entire contents of the Director device, you will need to restore the required configuration files and initial setup information. The following procedure assumes you previously saved these backup files with the **request system software configuration-backup** command. Ensure that you have these backup files available on an external USB flash drive before you perform the following steps.

1. Insert the external USB flash drive into the Director device.
2. Perform one of the following tasks:
  - If you have access to the default partition, reboot the Director device by issuing the **request system reboot director-group** command.
  - If you do not have access to the default partition, power cycle the Director device.

The following menu appears on the Director device console when the Director device boots up:

```
Juniper Networks QFabric Director Install/Recovery Media
- To boot from the local disk, wait 10 seconds or press the Enter key.
- To reinstall the QFabric software on this Director device, type: install
```

3. Type **install** and then press **Enter** to install the software on the Director device.

Once the installation process is complete, the Director device reboots, and the following menu appears on the Director device console:

```
Juniper Networks QFabric Director Install/Recovery Media
- To boot from the local disk, wait 10 seconds or press the Enter key.
- To reinstall the QFabric software on this Director device, type: install
```

4. Press **Enter**.

The Director device reboots from the local disk on which the software was just installed.

5. Log in as root on the Director device.

The following menu appears on the Director device console:

Before you can access the QFabric system, you must complete the initial setup of the Director group by using the steps that follow.



If the initial setup procedure does not complete successfully, log out of the Director device and then log back in to restart this setup menu.

Continue?[y/n]

6. Enter **n** to bypass the initial setup script and enter the Director device root directory, where you can mount the external USB flash drive containing the configuration files and initial setup information.

7. Issue the **ls /mnt** command to list the **mount** directory.

```
root@dg0 ~]# ls /mnt
```

8. Issue the **mkdir** command to create a directory within the mount directory.

```
root@dg0 ~]# mkdir /mnt/myusb
```

9. Issue the **mount /dev/sdb2 /mnt/myusb/** command to mount the external USB flash drive to the local drive of the Director device.

```
root@dg0 ~]# mount /dev/sdb2 /mnt/myusb/
```

10. Issue the **ls -la /mnt/myusb/** command to verify the contents of your mounted external USB flashdrive.

```
root@dg0 ~]# ls -la /mnt/myusb/
total 1770884
drwxr-xr-x 2 root root      4096 Sep  7 05:16 .
drwxr-xr-x 3 root root      4096 Sep  7 10:15 ..
-rw-r--r-- 1 root root    4249 Sep  7 03:52 mybackup-20110907
```

11. Exit the Director device and log back in as root on the Director device.

The following menu appears:

Before you can access the QFabric system, you must complete the initial setup of the Director group by using the steps that follow.

If the initial setup procedure does not complete successfully, log out of the Director device and then log back in to restart this setup menu.

Continue?[y/n] y

Initial Configuration

You may enter the configuration manually or restore from a backup.

Specify a backup file? [y/n] : y

Please specify the full path of the configuration backup file. :  
/mnt/myusb/mybackup-20110907

12. Enter **y** to continue.

13. Enter **y** and specify the path to the backup configuration file located on the external USB flash drive.

```
/mnt/myusb/mybackup-20110907
```

The following messages appear:

```
Saving temporary configuration...
```

```
Configuring peer...
```

```
connect error for 1.1.1.2:9001
```

```
Configuring local interfaces...
```

```
Configuring interface eth0 with [10.49.213.163/24:10.49.213.254]
```

```
Configured interface eth0 with [10.49.213.163/24:10.49.213.254]
```



```
Configuring QFabric software with initial pool of 4000 MAC addresses
[00:10:00:00:00:00 - 00:10:00:00:0f:3b]
Configuring QFabric address [10.49.213.50]
Reconfiguring QFabric software static configuration
Applying the new Director Device password
Applying the QFabric component password
First install initial configuration, generating and sharing SSH keys.
First install initial configuration, generating SSH keys.
connect error for 1.1.1.2:9001
Shared SSH keys.
Configuration complete. Director Group services will auto start within 30
seconds.
```

The Director device reboots from the local disk on which the software was just installed.  
Exit the Director device session and log in to the QFabric default partition CLI.

14. Issue the **request system software configuration-restore** command and specify the path to the backup configuration file located on the external USB flash drive to load the previously saved QFabric system configuration.

15. From the default partition, issue the **request system reboot node-group all** command to reboot all of the Node groups in the QFabric system to ensure that all Node devices are running the same version of software as the Director-group.

```
user@switch> request system reboot node-group all
```

16. From the default partition, issue the **request system reboot fabric** command to reboot the Interconnect devices and the other components in the fabric in the QFabric system to ensure that Interconnect devices are running the same version of software as the Director group.

```
user@switch> request system reboot fabric
```

17. Log in to the default partition and issue the **show version component all** command to verify that all components are running the same version of software.

```
user@switch> show version component all
dg1:
-
Hostname: qfabric
Model: qfx3100
JUNOS Base Version [11.3X30.6]

dg0:
-
Hostname: qfabric
Model: qfx3100
JUNOS Base Version [11.3X30.6]

NW-NG-0:
-
Hostname: qfabric
Model: qfx-jvre
JUNOS Base OS boot [11.3X30.6]
JUNOS Base OS Software Suite [11.3X30.6]
JUNOS Kernel Software Suite [11.3X30.6]
JUNOS Crypto Software Suite [11.3X30.6]
JUNOS Online Documentation [11.3X30.6]
JUNOS Enterprise Software Suite [11.3X30.6]
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]
JUNOS Routing Software Suite [11.3X30.6]
```



FC-0:

```
-
Hostname: qfabric
Model: qfx-jvre
JUNOS Base OS boot [11.3X30.6]
JUNOS Base OS Software Suite [11.3X30.6]
JUNOS Kernel Software Suite [11.3X30.6]
JUNOS Crypto Software Suite [11.3X30.6]
JUNOS Online Documentation [11.3X30.6]
JUNOS Enterprise Software Suite [11.3X30.6]
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]
JUNOS Routing Software Suite [11.3X30.6]
```

FC-1:

```
Hostname: qfabric
Model: qfx-jvre
JUNOS Base OS boot [11.3X30.6]
JUNOS Base OS Software Suite [11.3X30.6]
JUNOS Kernel Software Suite [11.3X30.6]
JUNOS Crypto Software Suite [11.3X30.6]
JUNOS Online Documentation [11.3X30.6]
JUNOS Enterprise Software Suite [11.3X30.6]
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]
JUNOS Routing Software Suite [11.3X30.6]
```

DRE-0:

```
-
Hostname: dre-0
Model: qfx-jvre
JUNOS Base OS boot [11.3X30.6]
JUNOS Base OS Software Suite [11.3X30.6]
JUNOS Kernel Software Suite [11.3X30.6]
JUNOS Crypto Software Suite [11.3X30.6]
JUNOS Online Documentation [11.3X30.6]
JUNOS Enterprise Software Suite [11.3X30.6]
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]
JUNOS Routing Software Suite [11.3X30.6]
```

FM-0:

```
-
Hostname: qfabric
Model: qfx-jvre
JUNOS Base OS boot [11.3X30.6]
JUNOS Base OS Software Suite [11.3X30.6]
JUNOS Kernel Software Suite [11.3X30.6]
JUNOS Crypto Software Suite [11.3X30.6]
JUNOS Online Documentation [11.3X30.6]
JUNOS Enterprise Software Suite [11.3X30.6]
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]
JUNOS Routing Software Suite [11.3X30.6]
```

nodedevice1:

```
-
Hostname: qfabric
Model: QFX3500
JUNOS Base OS boot [11.3X30.6]
JUNOS Base OS Software Suite [11.3X30.6]
JUNOS Kernel Software Suite [11.3X30.6]
JUNOS Crypto Software Suite [11.3X30.6]
JUNOS Online Documentation [11.3X30.6]
JUNOS Enterprise Software Suite [11.3X30.6]
```



```
JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]
JUNOS Routing Software Suite [11.3X30.6]
```

```
interconnectdevice1:
```

```
-
```

```
  Hostname: qfabric
```

```
  Model: QFX3108
```

```
  JUNOS Base OS boot [11.3X30.6]
```

```
  JUNOS Base OS Software Suite [11.3X30.6]
```

```
  JUNOS Kernel Software Suite [11.3X30.6]
```

```
  JUNOS Crypto Software Suite [11.3X30.6]
```

```
  JUNOS Online Documentation [11.3X30.6]
```

```
  JUNOS Enterprise Software Suite [11.3X30.6]
```

```
  JUNOS Packet Forwarding Engine Support (QFX RE) [11.3X30.6]
```

```
  JUNOS Routing Software Suite [11.3X30.6]
```

```
  warning: from interconnectdevice0: Disconnected
```

#### Related Documentation

- [Performing the QFabric System Initial Setup on a QFX3100 Director Group](#)
- [Upgrading Software on a QFabric System on page 109](#)
- [request system software configuration-backup on page 356](#)
- [request system software configuration-restore on page 357](#)

---

## Configuration and File Management

- [Loading a Previous Configuration File on page 5856](#)
- [Reverting to the Default Factory Configuration on page 5857](#)
- [Reverting to the Rescue Configuration on page 5857](#)
- [Cleaning Up the System File Storage Space on page 5858](#)

### Loading a Previous Configuration File

You can use the **rollback** <*number*> command to return to a previously committed configuration file. A switch saves the last 50 committed configurations, including the rollback number, date, time, and name of the user who issued the **commit** configuration command.

#### Syntax

```
rollback <number>
```

#### Options

- **none**—Return to the most recently saved configuration.
- ***number***—Configuration to return to.
  - **Range:** 0 through 49. The most recently saved configuration is number 0, and the oldest saved configuration is number 49.
  - **Default:** 0

To return to a configuration prior to the most recently committed one:



1. Specify the rollback number (here, 1 is entered and the configuration returns to the previously committed configuration):

```
[edit]
user@switch# rollback 1
load complete
```

2. Activate the configuration you have loaded:

```
[edit]
user@switch# commit
```

**Related Documentation**

- [Configuration File Terms on page 29](#)

## Reverting to the Default Factory Configuration

If for any reason the current active configuration fails, you can revert to the default factory configuration. The default factory configuration contains the basic configuration settings. This is the first configuration of the switch, and it is loaded when the switch is first installed and powered on.

The **load factory default** command is a standard Junos OS configuration command. This configuration command replaces the current active configuration with the default factory configuration.

To revert the switch to the rescue configuration:

1. 

```
[edit]
user@switch# load factory-default
[edit]
user@switch# delete system commit factory-settings
[edit]
user@switch# commit
```

**Related Documentation**

- [Understanding Configuration Files on page 1113](#)
- [Loading a Previous Configuration File on page 1122](#)
- [Reverting to the Rescue Configuration on page 150](#)

## Reverting to the Rescue Configuration

If someone inadvertently commits a configuration that denies management access to a QFX Series product and the console port is not accessible, you can overwrite the invalid configuration and replace it with the rescue configuration. The rescue configuration is a previously committed, valid configuration.

To revert the switch to the rescue configuration:

1. Enter the **load override** command.
- ```
[edit]
user@switch# load override filename
```



2. Commit your changes.

```
[edit]
user@switch# commit filename
```

#### Related Documentation

- [Setting or Deleting the Rescue Configuration on page 1131](#)
- [Reverting to the Default Factory Configuration on page 148](#)
- [Configuration File Terms on page 29](#)

## Cleaning Up the System File Storage Space

**Problem** The system file storage space on the switch is full. Rebooting the switch does not solve the problem.

The following error message is displayed during a typical operation on the switch after the file storage space is full.

```
user@switch% cli
user@switch> configure
/var: write failed, filesystem is full
```

**Solution** Clean up the file storage on the switch by deleting system files.

1. Request to delete system files on the switch.

```
user@switch> request system storage cleanup
```

The list of files to be deleted is displayed.

List of files to delete:

|  | Size    | Date         | Name                                                      |
|--|---------|--------------|-----------------------------------------------------------|
|  | 11B     | Jul 26 20:55 | /var/jail/tmp/alarmd.ts                                   |
|  | 124B    | Aug 4 18:05  | /var/log/default-log-messages.0.gz                        |
|  | 1301B   | Jul 26 20:42 | /var/log/install.0.gz                                     |
|  | 387B    | Jun 3 14:37  | /var/log/install.1.gz                                     |
|  | 4920B   | Aug 4 18:05  | /var/log/messages.0.gz                                    |
|  | 20.0K   | Jul 26 21:00 | /var/log/messages.1.gz                                    |
|  | 16.3K   | Jun 25 13:45 | /var/log/messages.2.gz                                    |
|  | 804B    | Aug 4 18:05  | /var/log/security.0.gz                                    |
|  | 16.8K   | Aug 3 11:15  | /var/log/security.1.gz                                    |
|  | 487B    | Aug 4 18:04  | /var/log/wtmp.0.gz                                        |
|  | 855B    | Jul 29 22:54 | /var/log/wtmp.1.gz                                        |
|  | 920B    | Jun 30 16:32 | /var/log/wtmp.2.gz                                        |
|  | 94B     | Jun 3 14:36  | /var/log/wtmp.3.gz                                        |
|  | 353.2K  | Jun 3 14:37  | /var/sw/pkg/jloader-qfx-11.2I20110303_1117_dc-builder.tgz |
|  | 124.0K  | Jun 3 14:30  | /var/tmp/gres-tp/env.dat                                  |
|  | 0B      | Apr 14 16:20 | /var/tmp/gres-tp/lock                                     |
|  | 0B      | Apr 14 17:37 | /var/tmp/if-rtbdb/env.lock                                |
|  | 12.0K   | Jul 26 20:55 | /var/tmp/if-rtbdb/env.mem                                 |
|  | 2688.0K | Jul 26 20:55 | /var/tmp/if-rtbdb/shm_usr1.mem                            |
|  | 132.0K  | Jul 26 20:55 | /var/tmp/if-rtbdb/shm_usr2.mem                            |
|  | 2048.0K | Jul 26 20:55 | /var/tmp/if-rtbdb/trace.mem                               |
|  | 155B    | Jul 26 20:55 | /var/tmp/krt_gencfg_filter.txt                            |
|  | 0B      | Jul 26 20:55 | /var/tmp/rtbdb/if-rtbdb                                   |
|  | 1400.6K | Aug 3 10:13  | /var/tmp/sfid.core.0.gz                                   |



```
1398.9K Aug  3 17:01 /var/tmp/sfid.core.1.gz
Delete these files ? [yes,no] (no)
```

2. Enter **yes** to delete the files.
3. Reboot the switch.



**BEST PRACTICE:** We recommend that you regularly request a system file storage cleanup to optimize the performance of the switch.

#### Related Documentation

- [request system storage cleanup on page 377](#)

## Ethernet Switching

- [Troubleshooting Ethernet Switching on page 5859](#)
- [Troubleshooting Layer 2 Protocol Tunneling on page 5860](#)
- [Troubleshooting Private VLANs on page 5861](#)
- [Troubleshooting Q-in-Q and VLAN Translation Configuration on page 5863](#)

## Troubleshooting Ethernet Switching

**Problem** Sometimes a MAC address entry in the switch's Ethernet switching table is not updated after the device with that MAC address has been moved from one interface to another on the switch. Typically, the switch does not wait for a MAC address expiration when a MAC move operation occurs. As soon as the switch detects the MAC address on the new interface, it immediately updates the table. Many network devices send a gratuitous ARP packet when switching an IP address from one device to another. The switch updates its ARP cache table after receipt of such gratuitous ARP messages, and then it also updates its Ethernet switching table.

Sometimes silent devices, such as syslog servers or SNMP trap receivers that receive UDP traffic but do not return acknowledgment (ACK) messages to the traffic source, fail to send gratuitous ARP packets when a device moves. If such a move occurs when the system administrator is not available to explicitly clear the affected interfaces by issuing the **clear ethernet-switching table** command, the entry for the moved device in the Ethernet switching table is not updated.

**Solution** Set up the switch to handle unattended MAC address switchovers.

1. Reduce the system-wide ARP aging timer. (By default, the ARP aging timer is set at 20 minutes. The range of the ARP aging timer is from 1 through 240 minutes.)
 

```
[edit system arp]
user@switch# set aging-timer 3
```
2. Set the MAC aging timer to the same value as the ARP timer. (By default, the MAC aging timer is set to 300 seconds. The range is 15 to 1,000,000 seconds.)
 

```
[edit vlans]
```



```
user@switch# set vlans sales mac-table-aging-time 180
```

The ARP entry and the MAC address entry for the moved device expire within the times specified by the aging timer values. After the entries expire, the switch sends a new ARP message to the IP address of the device. The device responds to the ARP message, thereby refreshing the entries in the switch's ARP cache table and Ethernet switching table.

- Related Documentation**
- [arp on page 1580](#)
  - [mac-table-aging-time on page 1610](#)

## Troubleshooting Layer 2 Protocol Tunneling

- [Drop Threshold Statistics Might Be Incorrect on page 5860](#)
- [Egress Filtering of L2PT Traffic Not Supported on page 5860](#)

### Drop Threshold Statistics Might Be Incorrect

**Problem** L2PT processing is done by the CPU, and L2PT traffic to the CPU is rate limited to a maximum of 1000 pps. If traffic is received at a rate faster than this limit, the rate limit causes the traffic to be dropped before it hits the threshold and the dropped packets will not be reported in L2PT statistics. This can also occur if you configure a drop threshold that is less than 1000 pps but traffic is received at a faster rate. For example, if you configure a drop threshold of 900 pps and the VLAN receives traffic at rate of 1100 pps, L2PT statistics will show that 100 packets were dropped. The 100 packets dropped because of the rate limit are not reported. Similarly, if you do not configure a drop threshold and the VLAN receives traffic at rate of 1100 pps, the 100 packets dropped because of the rate limit are not reported.

**Solution** This is expected behavior.

### Egress Filtering of L2PT Traffic Not Supported

**Problem** Egress filtering of L2PT traffic is not supported on the QFX3500 switch. That is, if you configure L2PT to tunnel a protocol on an interface, you cannot also use a firewall filter to filter traffic for that protocol on that interface in the output direction. If you commit a configuration for this purpose, the firewall filter is not applied to the L2PT-tunneled traffic.

**Solution** This is expected behavior.

- Related Documentation**
- [Understanding Layer 2 Protocol Tunneling on page 1419](#)
  - [Configuring Layer 2 Protocol Tunneling on page 1563](#)



## Troubleshooting Private VLANs

Use the following information to troubleshoot a private VLAN configuration.

- [Limitations of Private VLANs on page 5861](#)
- [Forwarding with Private VLANs on page 5861](#)
- [Egress Firewall Filters with Private VLANs on page 5862](#)

### Limitations of Private VLANs

The following constraints apply to private VLAN configurations:

- IGMP snooping is not supported with private VLANs.
- Routed VLAN interfaces are not supported on private VLANs
- Routing between secondary VLANs in the same primary VLAN is not supported.

### Forwarding with Private VLANs

- Problem**
- When isolated VLAN or community VLAN tagged traffic is received on a PVLAN trunk port, MAC addresses are learned from the primary VLAN. This means that output from the `show ethernet-switching table` command shows that MAC addresses are learned from the primary VLAN and replicated to secondary VLANs. This behavior has no effect on forwarding decisions.
  - If a packet with a secondary VLAN tag is received on a promiscuous port, it is accepted and forwarded.
  - If a packet is received on a PVLAN trunk port and meets both of the conditions listed below, it is dropped.
    - The packet has a community VLAN tag.
    - The packet is destined to a unicast MAC address or multicast group MAC address that was learned on an isolated VLAN.
  - If a packet is received on a PVLAN trunk port and meets both of the conditions listed below, it is dropped.
    - The packet has an isolated VLAN tag.
    - The packet is destined to a unicast MAC address or multicast group MAC address that was learned on a community VLAN.
  - If a packet with a primary VLAN tag is received by a secondary (isolated or community) VLAN port, the secondary port forwards the packet.
  - If you configure a community VLAN on one device and configure another community VLAN on a second device and both community VLANs use the same VLAN ID, traffic for one of the VLANs can be forwarded to the other VLAN. For example, assume the following configuration:
    - Community VLAN comm1 on switch 1 has VLAN ID 50 and is a member of primary VLAN pvlan100.



- Community VLAN comm2 on switch 2 also has VLAN ID 50 and is a member of primary VLAN pvlan200.
- Primary VLAN pvlan100 exists on both switches.

If traffic for comm1 is sent from switch 1 to switch 2, it will be sent to the ports participating in comm2. (The traffic will also be forwarded to the ports in comm1, as you would expect.)

**Solution** These are expected behaviors.

---

### Egress Firewall Filters with Private VLANs

---

**Problem** If you apply a firewall filter in the output direction to a primary VLAN, the filter also applies to the secondary VLANs that are members of the primary VLAN when the traffic egresses with the primary VLAN tag or isolated VLAN tag, as listed below:

- Traffic forwarded from a secondary VLAN trunk port to a promiscuous port (trunk or access)
- Traffic forwarded from a secondary VLAN trunk port that carries an isolated VLAN to a PVLAN trunk port.
- Traffic forwarded from a promiscuous port (trunk or access) to a secondary VLAN trunk port
- Traffic forwarded from a PVLAN trunk port. to a secondary VLAN trunk port
- Traffic forwarded from a community port to a promiscuous port (trunk or access)

If you apply a firewall filter in the output direction to a primary VLAN, the filter does *not* apply to traffic that egresses with a community VLAN tag, as listed below:

- Traffic forwarded from a community trunk port to a PVLAN trunk port
- Traffic forwarded from a secondary VLAN trunk port that carries a community VLAN to a PVLAN trunk port
- Traffic forwarded from a promiscuous port (trunk or access) to a community trunk port
- Traffic forwarded from a PVLAN trunk port. to a community trunk port

If you apply a firewall filter in the output direction to a community VLAN, the following behaviors apply:

- The filter is applied to traffic forwarded from a promiscuous port (trunk or access) to a community trunk port (because the traffic egresses with the community VLAN tag).
- The filter is applied to traffic forwarded from a community port to a PVLAN trunk port (because the traffic egresses with the community VLAN tag).
- The filter is *not* applied to traffic forwarded from a community port to a promiscuous port (because the traffic egresses with the primary VLAN tag or untagged).



**Solution** These are expected behaviors. They occur only if you apply a firewall filter to a private VLAN in the output direction and do not occur if you apply a firewall filter to a private VLAN in the input direction.

- Related Documentation**
- [Understanding Private VLANs on page 1389](#)
  - [Understanding Secondary VLAN Trunk Ports and Promiscuous Access Ports on PVLANS on page 1399](#)
  - [Creating a Private VLAN on a Single Switch on page 1560](#)
  - [Creating a Private VLAN Spanning Multiple Switches on page 1561](#)
  - [Example: Configuring PVLANS with Secondary VLAN Trunk Ports and Promiscuous Access Ports on page 1529](#)

## Troubleshooting Q-in-Q and VLAN Translation Configuration

- [Firewall Filter Match Condition Not Working with Q-in-Q Tunneling on page 5863](#)
- [Egress Port Mirroring with VLAN Translation on page 5863](#)

### Firewall Filter Match Condition Not Working with Q-in-Q Tunneling

**Problem** If you create a firewall filter that includes a match condition of **dot1q-tag** or **dot1q-user-priority** and apply the filter on input to a trunk port that participates in a service VLAN, the match condition does not work if the Q-in-Q EtherType is not 0x8100. (When Q-in-Q tunneling is enabled, trunk interfaces are assumed to be part of the service provider or data center network and therefore participate in service VLANs.)

**Solution** This is expected behavior. To set the Q-in-Q EtherType to 0x8100, enter the **set dot1q-tunneling ethertype 0x8100** statement at the **[edit ethernet-switching-options]** hierarchy level. You must also configure the other end of the link to use the same EtherType.

### Egress Port Mirroring with VLAN Translation

**Problem** If you create a port-mirroring configuration that mirrors customer VLAN (CVLAN) traffic on egress and the traffic undergoes VLAN translation before being mirrored, the VLAN translation does not apply to the mirrored packets. That is, the mirrored packets retain the service VLAN (SVLAN) tag that should be replaced by the CVLAN tag on egress. The original packets are unaffected—on these packets VLAN translation works properly, and the SVLAN tag is replaced with the CVLAN tag on egress.

**Solution** This is expected behavior.

- Related Documentation**
- [Understanding Q-in-Q Tunneling and VLAN Translation on page 1416](#)
  - [Example: Setting Up Q-in-Q Tunneling on page 1541](#)



## High Availability

---

- [Troubleshooting VRRP on page 5864](#)

### Troubleshooting VRRP

**Problem** If you configure multiple VRRP groups on an interface (using multiple VLANs), traffic for some of the groups might be briefly dropped if a failover occurs. This can happen because the new master must send gratuitous ARP replies for each VRRP group to update the ARP tables in the connected devices, and there is a short delay between each gratuitous ARP reply. Traffic sent by devices that have not yet received the gratuitous ARP reply is dropped (until the device receives the reply and learns the MAC address of the new master).

**Solution** Configure a failover delay so that the new master delays sending gratuitous ARP replies for the period that you set. This allows the new master to send the ARP replies for all of the VRRP groups simultaneously.

**Related Documentation** • [failover-delay on page 1822](#)

## Interfaces

---

- [Troubleshooting an Aggregated Ethernet Interface on page 5864](#)
- [Troubleshooting Network Interfaces on page 5865](#)

### Troubleshooting an Aggregated Ethernet Interface

**Problem** The `show interfaces terse` command shows that the LAG is down.

**Solution** Check the following:

- Verify that there is no configuration mismatch.
- Verify that all member ports are up.
- Verify that a LAG is part of family ethernet-switching (Layer 2 LAG) or family inet (Layer 3 LAG).
- Verify that the LAG member is connected to the correct LAG at the other end.
- Verify that the LAG members belong to the same switch.

**Related Documentation** • [Verifying the Status of a LAG Interface on page 2124](#)  
• [Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch on page 1950](#)



## Troubleshooting Network Interfaces

### The interface on the port in which an SFP or SFP+ transceiver is installed in an SFP or SFP+ module is down

**Problem** The QFX Series has an SFP or SFP+ module installed. The interface on the port in which an SFP or SFP+ transceiver is installed is down.

When you check the status with the CLI command **show interfaces *interface-name***, the disabled port is not listed.

**Cause** By default, the SFP or SFP+ module operates in the 10-Gigabit Ethernet mode and supports only SFP or SFP+ transceivers. The operating mode for the module is incorrectly set.

**Solution** Only SFP or SFP+ transceivers can be installed in SFP or SFP+ modules. You must configure the operating mode of the SFP or SFP+ module to match the type of transceiver you want to use. For SFP+ transceivers, configure 10-Gigabit Ethernet operating mode.

## Layer 3 Protocols

- [Troubleshooting Virtual Routing Instances on page 5865](#)

## Troubleshooting Virtual Routing Instances

- [Direct Routes Not Leaked Between Routing Instances on page 5865](#)

### Direct Routes Not Leaked Between Routing Instances

**Problem** Direct routes are not exported (leaked) between virtual routing instances. For example, consider the following scenario:

- QFX switch with two virtual routing instances:
  - Routing instance 1 connects to downstream device through interface xe-0/0/1.
  - Routing instance 2 connects to upstream device through interface xe-0/0/2.

If you enable route leaking between the routing instances (by using the **rib-group** statement, for example), the downstream device cannot connect to the upstream device because the QFX switch connects to the upstream device over a direct route and these routes are not leaked between instances.



**NOTE:** You can see a route to the upstream device in the routing table of the downstream device, but this route is not functional.

Indirect routes *are* leaked between routing instances, so the downstream device can connect to any upstream devices that are connected to the QFX switch over indirect routes.



**Solution** This is expected behavior.

- Related Documentation**
- [Understanding Virtual Router Routing Instances on page 2316](#)
  - [Configuring Virtual Router Routing Instances on page 2323](#)
  - [rib-group on page 2427](#)

---

## Security

---

- [Troubleshooting Firewall Filter Configuration on page 5866](#)
- [Troubleshooting Policer Configuration on page 5871](#)

### Troubleshooting Firewall Filter Configuration

Use the following information to troubleshoot a firewall filter configuration.

- [Firewall Filter Configuration Returns a No Space Available in TCAM Message on page 5866](#)
- [Filter Counts Previously Dropped Packet on page 5868](#)
- [Matching Packets Not Counted on page 5868](#)
- [Counter Reset When Editing Filter on page 5869](#)
- [Cannot Include loss-priority and policer Actions in Same Term on page 5869](#)
- [Cannot Egress Filter Certain Traffic Originating on QFX Switch on page 5869](#)
- [Firewall Filter Match Condition Not Working with Q-in-Q Tunneling on page 5869](#)
- [Egress Firewall Filters with Private VLANs on page 5870](#)
- [Egress Filtering of L2PT Traffic Not Supported on page 5871](#)
- [Cannot Drop BGP Packets in Certain Circumstances on page 5871](#)
- [Invalid Statistics for Policer on page 5871](#)

---

#### [Firewall Filter Configuration Returns a No Space Available in TCAM Message](#)

---

**Problem** When a firewall filter configuration exceeds the amount of available Ternary Content Addressable Memory (TCAM) space, the system returns the following **syslogd** message:

```
No space available in tcam.  
Rules for filter filter-name will not be installed.
```

A switch returns this message during the commit operation if the firewall filter that has been applied to a port, VLAN, or Layer 3 interface exceeds the amount of space available in the TCAM table. The filter is not applied, but the commit operation for the firewall filter configuration is completed in the CLI module.

**Solution** When a firewall filter configuration exceeds the amount of available TCAM table space, you must configure a new firewall filter with fewer filter terms so that the space requirements for the filter do not exceed the available space in the TCAM table.

You can perform either of the following procedures to correct the problem:



To delete the filter and its binding and apply the new smaller firewall filter to the same binding:

1. Delete the filter and its binding to ports, VLANs, or Layer 3 interfaces. For example:

```
[edit]
user@switch# delete firewall family ethernet-switching filter ingress-vlan-rogue-block
user@switch# delete vlans employee-vlan description "filter to block rogue devices on
employee-vlan"
user@switch# delete vlans employee-vlan filter input ingress-vlan-rogue-block
```

2. Commit the changes:

```
[edit]
user@switch# commit
```

3. Configure a smaller filter with fewer terms that does not exceed the amount of available TCAM space. For example:

```
[edit]
user@switch# set firewall family ethernet-switching filter new-ingress-vlan-rogue-block ...
```

4. Apply (bind) the new firewall filter to a port, VLAN, or Layer 3 interface. For example:

```
[edit]
user@switch# set vlans employee-vlan description "filter to block rogue devices on
employee-vlan"
user@switch# set vlans employee-vlan filter input new-ingress-vlan-rogue-block
```

5. Commit the changes:

```
[edit]
user@switch# commit
```

To apply a new firewall filter and overwrite the existing binding but not delete the original filter:

1. Configure a firewall filter with fewer terms than the original filter:

```
[edit]
user@switch# set firewall family ethernet-switching filter new-ingress-vlan-rogue-block...
```

2. Apply the firewall filter to the port, VLAN, or Layer 3 interfaces to overwrite the binding of the original filter—for example:

```
[edit]
user@switch# set vlans employee-vlan description "smaller filter to block rogue devices on
employee-vlan"
user@switch# set vlans employee-vlan filter input new-ingress-vlan-rogue-block
```

Because you can apply no more than one firewall filter per VLAN per direction, the binding of the original firewall filter to the VLAN is overwritten with the new firewall filter **new-ingress-vlan-rogue-block**.

3. Commit the changes:

```
[edit]
user@switch# commit
```



**NOTE:** The original filter is not deleted and is still available in the configuration.



### Filter Counts Previously Dropped Packet

---

**Problem** If you configure two or more filters in the same direction for a physical interface and one of the filters includes a counter, the counter will be incorrect if the following circumstances apply:

- You configure the filter that is applied to packets first to discard certain packets. For example, imagine that you have a VLAN filter that accepts packets sent to 10.10.1.0/24 addresses and implicitly discards packets sent to any other addresses. You apply the filter to the **admin** VLAN in the output direction, and interface xe-0/0/1 is a member of that VLAN.
- You configure a subsequent filter to accept and count packets that are dropped by the first filter. In this example, you have a port filter that accepts and counts packets sent to 192.168.1.0/24 addresses that is also applied to xe-0/0/1 in the output direction.

The egress VLAN filter is applied first and correctly discards packets sent to 192.168.1.0/24 addresses. The egress port filter is applied next and counts the discarded packets as matched packets. The packets are not forwarded, but the counter displayed by the egress port filter is incorrect.

Remember that the order in which filters are applied depends on the direction in which they are applied, as indicated here:

Ingress filters:

1. Port (Layer 2) filter
2. VLAN filter
3. Router (Layer 3) filter

Egress filters:

1. Router (Layer 3) filter
2. VLAN filter
3. Port (Layer 2) filter

**Solution** This is expected behavior.

### Matching Packets Not Counted

---

**Problem** If you configure two egress filters with counters for a physical interface and a packet matches both of the filters, only one of the counters includes that packet.

For example:

- You configure an egress port filter with a counter for interface xe-0/0/1.
- You configure an egress VLAN filter with a counter for the **admin** VLAN, and interface xe-0/0/1 is a member of that VLAN.



- A packet matches both filters.

In this case, the packet is counted by only one of the counters even though it matched both filters.

**Solution** This is expected behavior.

### Counter Reset When Editing Filter

**Problem** If you edit a firewall filter term, the value of any counter associated with any term in the same filter is set to 0, including the implicit counter for any policer referenced by the filter. Consider the following examples:

- Assume that your filter has **term1**, **term2**, and **term3**, and each term has a counter that has already counted matching packets. If you edit any of the terms in any way, the counters for all the terms are reset to 0.
- Assume that your filter has **term1** and **term2**. Also assume that **term2** has a **policer** action modifier and the implicit counter of the policer has already counted 1000 matching packets. If you edit **term1** or **term2** in any way, the counter for the policer referenced by **term2** is reset to 0.

**Solution** This is expected behavior.

### Cannot Include loss-priority and policer Actions in Same Term

**Problem** You cannot include both of the following actions in the same firewall filter term in a QFX Series switch:

- **loss-priority**
- **policer**

If you do so, you see the following error message when you attempt to commit the configuration: "cannot support policer action if loss-priority is configured."

**Solution** This is expected behavior.

### Cannot Egress Filter Certain Traffic Originating on QFX Switch

**Problem** On a QFX Series switch, you cannot filter certain traffic with a firewall filter applied in the output direction if the traffic originates on the QFX switch. This limitation applies to control traffic for protocols such as ICMP (ping), STP, LACP, and so on.

**Solution** This is expected behavior.

### Firewall Filter Match Condition Not Working with Q-in-Q Tunneling

**Problem** If you create a firewall filter that includes a match condition of **dot1q-tag** or **dot1q-user-priority** and apply the filter on input to a trunk port that participates in a service



VLAN, the match condition does not work if the Q-in-Q EtherType is not 0x8100. (When Q-in-Q tunneling is enabled, trunk interfaces are assumed to be part of the service provider or data center network and therefore participate in service VLANs.)

**Solution** This is expected behavior. To set the Q-in-Q EtherType to 0x8100, enter the **set dot1q-tunneling ethertype 0x8100** statement at the **[edit ethernet-switching-options]** hierarchy level. You must also configure the other end of the link to use the same EtherType.

---

### Egress Firewall Filters with Private VLANs

---

**Problem** If you apply a firewall filter in the output direction to a primary VLAN, the filter also applies to the secondary VLANs that are members of the primary VLAN when the traffic egresses with the primary VLAN tag or isolated VLAN tag, as listed below:

- Traffic forwarded from a secondary VLAN trunk port to a promiscuous port (trunk or access)
- Traffic forwarded from a secondary VLAN trunk port that carries an isolated VLAN to a PVLAN trunk port.
- Traffic forwarded from a promiscuous port (trunk or access) to a secondary VLAN trunk port
- Traffic forwarded from a PVLAN trunk port. to a secondary VLAN trunk port
- Traffic forwarded from a community port to a promiscuous port (trunk or access)

If you apply a firewall filter in the output direction to a primary VLAN, the filter does *not* apply to traffic that egresses with a community VLAN tag, as listed below:

- Traffic forwarded from a community trunk port to a PVLAN trunk port
- Traffic forwarded from a secondary VLAN trunk port that carries a community VLAN to a PVLAN trunk port
- Traffic forwarded from a promiscuous port (trunk or access) to a community trunk port
- Traffic forwarded from a PVLAN trunk port. to a community trunk port

If you apply a firewall filter in the output direction to a community VLAN, the following behaviors apply:

- The filter is applied to traffic forwarded from a promiscuous port (trunk or access) to a community trunk port (because the traffic egresses with the community VLAN tag).
- The filter is applied to traffic forwarded from a community port to a PVLAN trunk port (because the traffic egresses with the community VLAN tag).
- The filter is *not* applied to traffic forwarded from a community port to a promiscuous port (because the traffic egresses with the primary VLAN tag or untagged).



**Solution** These are expected behaviors. They occur only if you apply a firewall filter to a private VLAN in the output direction and do not occur if you apply a firewall filter to a private VLAN in the input direction.

### Egress Filtering of L2PT Traffic Not Supported

**Problem** Egress filtering of L2PT traffic is not supported on the QFX3500 switch. That is, if you configure L2PT to tunnel a protocol on an interface, you cannot also use a firewall filter to filter traffic for that protocol on that interface in the output direction. If you commit a configuration for this purpose, the firewall filter is not applied to the L2PT-tunneled traffic.

**Solution** This is expected behavior.

### Cannot Drop BGP Packets in Certain Circumstances

**Problem** BGP packets with a time-to-live (TTL) value greater than 1 cannot be discarded using a firewall filter applied to a loopback interface or applied on input to a Layer 3 interface. BGP packets with TTL value of 1 or 0 can be discarded using a firewall filter applied to a loopback interface or applied on input to a Layer 3 interface.

**Solution** This is expected behavior.

### Invalid Statistics for Policer

**Problem** If you apply a single-rate two-color policer in more than 128 terms in a firewall filter, the output of the **show firewall** command displays incorrect data for the policer.

**Solution** This is expected behavior.

**Related Documentation**

- [Configuring Firewall Filters on page 4177](#)
- [Verifying That Firewall Filters Are Operational on page 4278](#)

## Troubleshooting Policer Configuration

- [Incomplete Count of Packet Drops on page 5871](#)
- [Counter Reset When Editing Filter on page 5872](#)
- [Invalid Statistics for Policer on page 5872](#)
- [Egress Policers on QFX3500 Might Allow More Throughput Than is Configured on page 5872](#)

### Incomplete Count of Packet Drops

**Problem** Under certain circumstances, Junos OS might display a misleading number of packets dropped by an ingress policer.

If packets are dropped because of ingress admission control, policer statistics might not show the number of packet drops you would expect by calculating the difference between



ingress and egress packet counts. This might happen if you apply an ingress policer to multiple interfaces, and the aggregate ingress rate of those interfaces exceeds the line rate of a common egress interface. In this case, packets might be dropped from the ingress buffer. These drops are not included in the count of packets dropped by the policer, which causes policer statistics to underreport the total number of drops.

**Solution** This is expected behavior.

---

#### Counter Reset When Editing Filter

**Problem** If you edit a firewall filter term, the value of any counter associated with any term in the same filter is set to 0, including the implicit counter for any policer referenced by the filter. Consider the following examples:

- Assume that your filter has **term1**, **term2**, and **term3**, and each term has a counter that has already counted matching packets. If you edit any of the terms in any way, the counters for all the terms are reset to 0.
- Assume that your filter has **term1** and **term2**. Also assume that **term2** has a **policer** action modifier and the implicit counter of the policer has already counted 1000 matching packets. If you edit **term1** or **term2** in any way, the counter for the policer referenced by **term2** is reset to 0.

**Solution** This is expected behavior.

---

#### Invalid Statistics for Policer

**Problem** If you apply a single-rate two-color policer in more than 128 terms in a firewall filter, the output of the **show firewall** command displays incorrect data for the policer.

**Solution** This is expected behavior.

---

#### Egress Policers on QFX3500 Might Allow More Throughput Than is Configured

**Problem** If you configure a policer to rate-limit throughput and apply it on egress to multiple interfaces on a QFX3500 switch or node, the measured aggregate policed rate might be twice the configured rate, depending on which interfaces you apply the policer to. This occurs if you apply a policer to multiple interfaces and *both* of the following are true:

- There is at least one policed interface in the range xe-0/0/0 to xe-0/0/23 or the range xe-0/1/1 to xe-0/1/7
- There is at least one policed interface in the range xe-0/0/24 to xe-0/0/47 or the range xe-0/1/8 to xe-0/1/15

For example, if you configure a policer to rate-limit at 1 Gbps and apply the policer (by using a firewall filter) to xe-0/0/0 and xe-0/0/24 in the output direction, each interface is rate-limited at 1 Gbps, for a total allowed throughput of 2 Gbps. The same behavior occurs if you apply the policer to xe-0/1/1 and xe-0/0/24—each interface is rate-limited at 1 Gbps.



If you apply the same policer on egress to multiple interfaces in these groups, each group is rate-limited at 1 Gbps. For example, if you apply the policer to xe-0/0/0 through xe-0/0/4 (five interfaces) and xe-0/0/24 through xe-0/0/33 (ten interfaces), each group is rate-limited at 1 Gbps, for a total allowed throughput of 2 Gbps.

Here is another example: If you apply the policer to xe-0/0/0 through xe-0/0/4 and xe-0/1/1 through xe-0/1/5 (a total of ten interfaces), that group is rate-limited at 1 Gbps in aggregate. If you also apply the policer to xe-0/0/24, that one interface is rate-limited at 1 Gbps while the other ten are still rate-limited at 1 Gbps in aggregate.

Interfaces xe-0/1/1 through xe-0/1/15 are physically located on the QSFP+ uplink ports, according to the following scheme:

- xe-0/1/1 through xe-0/1/3 are on Q0.
- xe-0/1/4 through xe-0/1/7 are on Q1.
- xe-0/1/8 through xe-0/1/11 are on Q2.
- xe-0/1/12 through xe-0/1/15 are on Q3.

This behavior occurs only if the policer is applied in the output direction. If you configure a policer as described above but apply it in the input direction, the total allowed throughput for all interfaces is 1 Gbps.

**Solution** This is expected behavior.

## Services

---

- [Troubleshooting Port Mirroring on page 5873](#)

### Troubleshooting Port Mirroring

- [Port Mirroring Constraints and Limitations on page 5873](#)
- [Egress Port Mirroring with VLAN Translation on page 5875](#)

#### Port Mirroring Constraints and Limitations

---

- [Local and Remote Port Mirroring on page 5873](#)
- [Remote Port Mirroring Only on page 5875](#)

#### ***Local and Remote Port Mirroring***

The following constraints and limitations apply to local and remote port mirroring with the QFX Series:

- You can create a total of four port-mirroring configurations on the QFX Series (standalone switches and QFabric systems), subject to the following limits:
  - There can be no more than two configurations that mirror ingress traffic.



- There can be no more than two configurations that mirror egress traffic.
- You can configure no more than one type of output in one port-mirroring configuration. That is, you can use no more than one of the following to complete a **set analyzer name output** statement:
  - **interface**
  - **ip-address**
  - **vlan**
- If you configure Junos OS to mirror egress packets, do not configure more than 2000 VLANs on a QFX3500 device or QFabric system. If you do so, some VLAN packets might contain incorrect VLAN IDs. This applies to any VLAN packets—not only the mirrored copies.
- The **ratio** and **loss-priority** options are not supported.
- Packets with physical layer errors are filtered out and are not sent to the output port or VLAN.
- If you use sFlow monitoring to sample traffic, it does not sample the mirror copies when they exit from the output interface.
- You cannot mirror packets exiting or entering the following ports:
  - Dedicated Virtual Chassis interfaces
  - Management interfaces (me0 or vme0)
  - Fibre Channel interfaces
  - Routed VLAN interfaces
- Do not include an 802.1Q subinterface that has a unit number other than 0 in a port mirroring configuration. Port mirroring does not work with subinterfaces if their unit number is not 0. (You configure 802.1Q subinterfaces using the **vlan-tagging** statement.)
- When packet copies are sent out the output interface, they are not modified for any changes that are normally applied on egress, such as CoS rewriting.
- An interface can be the input interface for only one mirroring configuration. Do not use the same interface as the input interface for multiple mirroring configurations.
- (QFabric systems only) If you configure a QFabric analyzer to mirror egress traffic and the input and output interfaces are on different Node devices, the mirrored copies have incorrect VLAN IDs. This limitation does not apply if you configure a QFabric analyzer to mirror egress traffic and the input and output interfaces are on the *same* Node device. In this case the mirrored copies have the correct VLAN IDs (as long as you do not configure more than 2000 VLANs on the QFabric system).



**Remote Port Mirroring Only**

The following constraints and limitations apply to remote port mirroring with the QFX Series:

- If you configure an output IP address, the address cannot be in the same subnetwork as any of the switch's management interfaces.
- If you create virtual routing instances and also create an analyzer configuration that includes an output IP address, the output address belongs to the default virtual routing instance (inet.0 routing table).
- An output VLAN cannot be a private VLAN or VLAN range.
- An output VLAN cannot be shared by multiple **analyzer** statements.
- An output VLAN interface cannot be a member of any other VLAN.
- An output VLAN interface cannot be an aggregated Ethernet interface.
- On the source (monitored) switch, only one interface can be a member of the analyzer VLAN.

**Egress Port Mirroring with VLAN Translation**

**Problem** If you create a port-mirroring configuration that mirrors customer VLAN (CVLAN) traffic on egress and the traffic undergoes VLAN translation before being mirrored, the VLAN translation does not apply to the mirrored packets. That is, the mirrored packets retain the service VLAN (SVLAN) tag that should be replaced by the CVLAN tag on egress. The original packets are unaffected—on these packets VLAN translation works properly, and the SVLAN tag is replaced with the CVLAN tag on egress.

**Solution** This is expected behavior.

**Related Documentation**

- [Understanding Port Mirroring on page 4313](#)
- [Example: Configuring Port Mirroring for Local Analysis on page 4319](#)
- [Example: Configuring Port Mirroring for Remote Analysis on page 4324](#)

**Storage**

- [Troubleshooting Dropped FCoE Traffic on page 5875](#)
- [Troubleshooting Fibre Channel Interface Deletion on page 5878](#)
- [Troubleshooting Dropped FIP Traffic on page 5879](#)

**Troubleshooting Dropped FCoE Traffic**

**Problem** Fibre Channel over Ethernet (FCoE) traffic for which you want guaranteed delivery is dropped.



**Cause** There are several possible causes of dropped FCoE traffic (the list numbers of the possible causes correspond to the list numbers of the solutions in the *Solution* section.):

1. Priority-based flow control (PFC) is not enabled on the FCoE priority (IEEE 802.1p code point) in both the input and output stanzas of the congestion notification profile.
2. The FCoE traffic is not classified correctly at the ingress interface. FCoE traffic should either use the default **fcoe** forwarding class and classifier configuration (maps the **fcoe** forwarding class to IEEE 802.1p code point 011) or be mapped to a lossless forwarding class and to the code point enabled for PFC on the input and output interfaces.
3. The congestion notification profile that enables PFC on the FCoE priority is not attached to the interface.
4. The forwarding class set (priority group) used for guaranteed delivery traffic does not include the forwarding class used for FCoE traffic.
5. Insufficient bandwidth has been allocated for the FCoE queue or for the forwarding class set to which the FCoE queue belongs.
6. If you are using Junos OS Release 12.2, the **fcoe** forwarding class has been explicitly configured instead of using the default **fcoe** forwarding class configuration (forwarding-class-to-queue mapping).



.....

**NOTE:** If you are using Junos OS Release 12.2, use the default forwarding-class-to-queue mapping for the lossless **fcoe** and **no-loss** forwarding classes. If you explicitly configure the lossless forwarding classes, the traffic mapped to those forwarding classes is treated as lossy (best effort) traffic and does *not* receive lossless treatment.

.....

7. If you are using Junos OS Release 12.3 or later and you are not using the default **fcoe** forwarding class configuration, the forwarding class used for FCoE is not configured with the **no-loss** packet drop attribute. In Junos OS 12.3 or later, explicit forwarding classes configurations must include the **no-loss** packet drop attribute to be treated as lossless forwarding classes.

**Solution** The list numbers of the possible solutions correspond to the list numbers of the causes in the *Cause* section.



1. Check the congestion notification profile (CNP) to see if PFC is enabled on the FCoE priority (the correct IEEE 802.1p code point) on both input and output interfaces. Use the **show class-of-service congestion-notification** operational command to show the code points that are enabled for PFC in each CNP.

If you are using the default configuration, FCoE traffic is mapped to code point 011 (priority 3). In this case, the input stanza of the CNP should show that PFC is enabled on code point 011, and the output stanza should show that priority 011 is mapped to flow control queue 3.

If you explicitly configured a forwarding class for FCoE traffic, ensure that:

- You specified the **no-loss** packet drop attribute in the forwarding class configuration
- The code point mapped to the FCoE forwarding class in the ingress classifier is the code point enabled for PFC in the CNP input stanza
- The code point and output queue used for FCoE traffic are mapped to each other in the CNP output stanza (if you are not using the default priority and queue, you must explicitly configure each output queue that you want to respond to PFC messages)

For example, if you explicitly configure a forwarding class for FCoE traffic that is mapped to output queue 5 and to code point 101 (priority 5), the output of the **show class-of-service congestion-notification** looks like:

```
Name: fcoe_p5_cnp, Index: 12183
Type: Input
Cable Length: 100 m
  Priority  PFC      MRU
  000      Disabled
  001      Disabled
  010      Disabled
  011      Disabled
  100      Disabled
  101      Enabled   2500
  110      Disabled
  111      Disabled
Type: Output
  Priority  Flow-Control-Queues
  101      5
```

2. Use the **show class-of-service classifier type ieee-802.1p** operational command to check if the classifier maps the forwarding class used for FCoE traffic to the correct IEEE 802.1p code point.
3. Ensure that the congestion notification profile and classifier are attached to the correct ingress interface. Use the operational command **show configuration class-of-service interfaces interface-name**.
4. Check that the forwarding class set includes the forwarding class used for FCoE traffic. Use the operational command **show configuration class-of-service forwarding-class-sets** to show the configured priority groups and their forwarding classes.



5. Verify the amount of bandwidth allocated to the queue mapped to the FCoE forwarding class and to the forwarding class set to which the FCoE traffic queue belongs. Use the **show configuration class-of-service schedulers *scheduler-name*** operational command (specify the scheduler for FCoE traffic as the *scheduler-name*) to see the minimum guaranteed bandwidth (**transmit-rate**) and maximum bandwidth (**shaping-rate**) for the queue.

Use the **show configuration class-of-service traffic-control-profiles *traffic-control-profile*** operational command (specify the traffic control profile used for FCoE traffic as the *traffic-control-profile*) to see the minimum guaranteed bandwidth (**guaranteed-rate**) and maximum bandwidth (**shaping-rate**) for the forwarding class set.

6. Delete the explicit FCoE forwarding-class-to-queue mapping so that the system uses the default FCoE forwarding-class-to-queue mapping. Include the **delete forwarding-classes class fcoe queue-num 3** statement at the **[edit class-of-service]** hierarchy level to remove the explicit configuration. The system then uses the default configuration for the FCoE forwarding class and preserves the lossless treatment of FCoE traffic.
7. Use the **show class-of-service forwarding-class** operational command to display the configured forwarding classes. The *No-Loss* column shows whether lossless transport is enabled or disabled for each forwarding class. If the forwarding class used for FCoE traffic is not enabled for lossless transport, include the **no-loss** packet drop attribute in the forwarding class configuration (**set class-of-service forwarding-classes class *fcoe-forwarding-class-name* queue-num *queue-number* no-loss**).

See “[Example: Configuring CoS PFC for FCoE Traffic](#)” on page 4509 for step-by-step instructions on how to configure PFC for FCoE traffic, including classifier, interface, congestion notification profile, PFC, and bandwidth scheduling configuration.

#### Related Documentation

- [show class-of-service congestion-notification on page 5281](#)
- [show class-of-service forwarding-class-set on page 5288](#)
- [Configuring CoS PFC \(Congestion Notification Profiles\) on page 5145](#)
- [Example: Configuring CoS PFC for FCoE Traffic on page 4509](#)
- [Overview of CoS Changes Introduced in Junos OS Release 12.2 on page 4820](#)
- [Understanding CoS Flow Control \(Ethernet PAUSE and PFC\) on page 4476](#)

## Troubleshooting Fibre Channel Interface Deletion

**Problem** You deleted a Fibre Channel (FC) interface at the **[edit interfaces]** hierarchy level, but the commit check fails so the interface is not deleted.

**Cause** You must first delete the FC interface from the FC fabric on the QFX Series before you can delete the FC interface at the **[edit interfaces]** hierarchy level. You must perform both operations to delete a FC interface.



**Solution** First delete the interface from the FC fabric and then delete the interface from the QFX Series:

1. Delete the FC interface from the FC fabric to which it belongs:

```
[edit]
user@switch# delete fc-fabrics fabric-name interface interface-name
```

For example, to delete the FC interface **fc-0/0/3.0** from an FC fabric named **sanfab1**:

```
[edit]
user@switch# delete fc-fabrics sanfab1 interface fc-0/0/3.0
```

2. Delete the FC interface at the **[edit interfaces]** hierarchy level:

```
[edit]
user@switch: delete interfaces interface-name
```

For example, to delete the interface **fc-0/0/3.0** from the switch:

```
[edit]
user@switch: delete interfaces fc-0/0/3.0
```

- Related Documentation**
- [fc-fabrics on page 4627](#)
  - [interface on page 4637](#)
  - [interfaces on page 2078](#)
  - [Understanding Interfaces on an FCoE-FC Gateway on page 4420](#)

## Troubleshooting Dropped FIP Traffic

**Problem** Fibre Channel over Ethernet (FCoE) Initialization Protocol (FIP) traffic such as FIP VLAN discovery and notification frames is dropped on the QFX Series.

**Cause** The interface on which the FIP traffic is dropped does not have a native VLAN configured. FIP VLAN discovery and notification messages are exchanged as untagged packets on the native VLAN. (After the FCoE session with the Fibre Channel switch is established, FCoE traffic uses the FCoE VLAN.)

**Solution** Check to ensure that every 10-Gigabit Ethernet interface that connects to an FCoE device includes a native VLAN. Configure a native VLAN on all 10-Gigabit Ethernet interfaces that connect to FCoE devices.



**NOTE:** Make sure that the native VLAN you are using on the QFX Series is the same native VLAN that the FCoE devices use for Ethernet traffic.

To configure a native VLAN on an interface:

1. Set the interface port mode to **tagged-access** if you have not already done so:

```
[edit]
user@switch# set interfaces interface unit unit family ethernet-switching port-mode
tagged-access
```



For example, to set the port mode to **tagged-access** for interface **xe-0/0/6.0**:

```
[edit]
user@switch# set interfaces xe-0/0/6 unit 0 family ethernet-switching port-mode
tagged-access
```

2. Configure a native VLAN on the interface:

```
[edit]
user@switch# set interfaces interface unit unit family ethernet-switching native-vlan-id
vlan-id
```

For example, to set the native VLAN ID to 1 for interface **xe-0/0/6.0**:

```
[edit]
user@switch# set interfaces xe-0/0/6 unit 0 family ethernet-switching native-vlan-id 1
```

3. Configure the native VLAN if it does not already exist:

```
[edit]
user@switch# set vlans vlan-name vlan-id vlan-id
```

For example, to name the native VLAN **native** and use the VLAN ID 1:

```
[edit]
user@switch# set vlans native vlan-id 1
```

- Related Documentation**
- [interfaces on page 2078](#)
  - [vlans on page 1654](#)
  - [Understanding FIP Functions on page 4408](#)

---

## Traffic Management

- [Troubleshooting Egress Bandwidth That Exceeds the Configured Maximum Bandwidth on page 5880](#)
- [Troubleshooting Egress Bandwidth That Exceeds the Configured Minimum Bandwidth on page 5881](#)
- [Troubleshooting Egress Queue Bandwidth Impacted by Congestion on page 5882](#)
- [Troubleshooting an Unexpected Rewrite Value on page 5883](#)
- [Troubleshooting a Port Reset on QFabric Systems When a Queue Stops Transmitting Traffic on page 5884](#)

### Troubleshooting Egress Bandwidth That Exceeds the Configured Maximum Bandwidth

**Problem** The maximum bandwidth of a queue when measured at the egress port exceeds the maximum bandwidth (shaping rate) configured for the queue.

**Cause** When you configure bandwidth for a queue or a priority group, the switch accounts for the configured bandwidth as data only. The switch does not rate-shape the preamble and the interframe gap (IFG) associated with frames, so the switch does not account for the bandwidth consumed by the preamble and the IFG in its maximum bandwidth calculations.

The measured egress bandwidth can exceed the configured maximum bandwidth when small packet sizes (64 or 128 bytes) are transmitted because the preamble and the IFG



are a larger percentage of the total traffic. For larger packet sizes, the preamble and IFG overhead are a small portion of the total traffic, and the effect on egress bandwidth is minor.

**Solution** When you calculate the bandwidth requirements for queues on which you expect a significant amount of traffic with small packet sizes, consider the shaping rate as the maximum bandwidth for the data only. Add sufficient bandwidth to your calculations to account for the preamble and IFG so that the port bandwidth is sufficient to handle the combined maximum data rate (shaping rate) and the preamble and IFG.

If the maximum bandwidth measured at the egress port exceeds the amount of bandwidth that you want to allocate to the queue, reduce the shaping rate for that queue.

- Related Documentation**
- [shaping-rate on page 5253](#)
  - [Example: Configuring Maximum Output Bandwidth on page 5044](#)
  - [Example: Configuring Queue Schedulers on page 5030](#)
  - [Understanding CoS Output Queue Schedulers on page 4876](#)

## Troubleshooting Egress Bandwidth That Exceeds the Configured Minimum Bandwidth

**Problem** The minimum bandwidth of a queue or a priority group when measured at the egress port exceeds the minimum bandwidth configured for the queue (transmit-rate) or for the priority group (guaranteed-rate).

**Cause** When you configure bandwidth for a queue or a priority group, the switch accounts for the configured bandwidth as data only. The switch does not include the preamble and the interframe gap (IFG) associated with frames, so the switch does not account for the bandwidth consumed by the preamble and the IFG in its minimum bandwidth calculations.

The measured egress bandwidth can exceed the configured minimum bandwidth when small packet sizes (64 or 128 bytes) are transmitted because the preamble and the IFG are a larger percentage of the total traffic. For larger packet sizes, the preamble and IFG overhead are a small portion of the total traffic, and the effect on egress bandwidth is minor.



**NOTE:** The sum of the queue transmit rates in a priority group should not exceed the guaranteed rate for the priority group. (You cannot guarantee a minimum bandwidth for the queues that is greater than the minimum bandwidth guaranteed for the entire set of queues.)

**Solution** When you calculate the bandwidth requirements for queues and priority groups on which you expect a significant amount of traffic with small packet sizes, consider the transmit rate and the guaranteed rate as the minimum bandwidth for the data only. Add sufficient bandwidth to your calculations to account for the preamble and IFG so that the port



bandwidth is sufficient to handle the combined minimum data rate and the preamble and IFG.

If the minimum bandwidth measured at the egress port exceeds the amount of bandwidth that you want to allocate to a queue or to a priority group, reduce the transmit rate for that queue and reduce the guaranteed rate of the priority group that contains the queue.

**Related  
Documentation**

- [guaranteed-rate on page 5217](#)
- [transmit-rate on page 5260](#)
- [Example: Configuring Minimum Guaranteed Output Bandwidth on page 5040](#)
- [Example: Configuring Queue Schedulers on page 5030](#)
- [Understanding CoS Output Queue Schedulers on page 4876](#)

## Troubleshooting Egress Queue Bandwidth Impacted by Congestion

**Problem** Congestion on an egress port causes egress queues to receive less bandwidth than expected. Egress port congestion can impact the amount of bandwidth allocated to queues on the congested port and, in some cases, on ports that are not congested.

**Cause** Egress queue congestion can cause the ingress port buffer to fill above a certain threshold and affect the flow to the queues on the egress port. One queue receives its configured bandwidth, but the other queues on the egress port are affected and do not receive their configured share of bandwidth.

**Solution** The solution is to configure a drop profile to apply weighted random early detection (WRED) to the queue or queues on the congested ports.

Configure a drop profile on the queue that is receiving its configured bandwidth. This queue is preventing the other queues from receiving their expected bandwidth. The drop profile prevents the queue from affecting the other queues on the port.

To configure a tail-drop profile using the CLI:

- Name the drop profile and set the drop start point, drop end point, minimum drop rate, and maximum drop rate for the drop profile:

```
[edit class-of-service]
user@switch# set drop-profile drop-profile-name interpolate fill-level percentage fill-level
percentage drop-probability 0 drop-probability percentage
```

**Related  
Documentation**

- [drop-profile on page 5198](#)
- [Example: Configuring Tail-Drop Profiles on page 5019](#)
- [Example: Configuring CoS Hierarchical Port Scheduling \(ETS\) on page 4962](#)
- [Understanding CoS Tail-Drop Profiles on page 4929](#)



## Troubleshooting an Unexpected Rewrite Value

**Problem** Traffic from one or more forwarding classes on an egress port is assigned an unexpected rewrite value.



**NOTE:** For packets that carry both an inner VLAN tag and an outer VLAN tag, the rewrite rules rewrite only the outer VLAN tag.

**Cause** If you configure a rewrite rule for a forwarding class on an egress port but you do not configure a rewrite rule for every forwarding class on that egress port, then the forwarding classes that do not have a configured rewrite rule are assigned random rewrite values.

For example:

1. Configure forwarding classes **fc1**, **fc2**, and **fc3**.
2. Configure rewrite rules for forwarding classes **fc1** and **fc2**, but not for forwarding class **fc3**.
3. Assign forwarding classes **fc1**, **fc2**, and **fc3** to a port.

When traffic for these forwarding classes flows through the port, traffic for forwarding classes **fc1** and **fc2** is rewritten correctly. However, traffic for forwarding class **fc3** is assigned a random rewrite value.

**Solution** If any forwarding class on an egress port has a configured rewrite rule, then all forwarding classes on that egress port must have a configured rewrite rule. Configuring a rewrite rule for any forwarding class that is assigned a random rewrite value solves the problem.



**TIP:** If you want the forwarding class to use the same code point value assigned to it by the ingress classifier, specify that value as the rewrite rule value. For example, if a forwarding class has the IEEE 802.1 ingress classifier code point value 011, configure a rewrite rule for that forwarding class that uses the IEEE 802.1p code point value 011.



**NOTE:** There are no default rewrite rules. You can bind one rewrite rule for each type (DSCP and IEEE 802.1) to a given interface. A rewrite rule can contain multiple forwarding-class-to-rewrite-value associations.

1. Assign a rewrite value to a forwarding class. Add the new rewrite value to the same rewrite rule as the other forwarding classes on the port:

```
[edit class-of-service rewrite-rules]
```



```
user@switch# set (dscp | ieee-802.1) rewrite-name forwarding-class class-name loss-priority
priority code-point (alias | bits)
```

For example, if the other forwarding classes on the port use rewrite values defined in the rewrite rule **custom-rw**, the forwarding class **fcoe** is being randomly rewritten, and you want to use IEEE 802.1 code point **011** for the **fcoe** forwarding class:

```
[edit class-of-service rewrite-rules]
user@switch# set ieee-802.1 custom-rw forwarding-class fcoe loss-priority high code-point
011
```

2. Enable the rewrite rule on an interface if it is not already enabled on the desired interface:

```
[edit]
user@switch# set class-of-service interfaces interface-name unit unit rewrite-rules (dscp |
ieee-802.1) rewrite-rule-name
```

For example, to enable the rewrite rule **custom-rw** on interface **xe-0/0/24.0**:

```
[edit]
user@switch# set class-of-service interfaces xe-0/0/24 unit 0 rewrite-rules ieee-802.1
custom-rw
```

#### Related Documentation

- [interfaces on page 5228](#)
- [rewrite-rules on page 5246](#)
- [Defining CoS Rewrite Rules on page 5155](#)
- [Monitoring CoS Rewrite Rules on page 5268](#)

## Troubleshooting a Port Reset on QFabric Systems When a Queue Stops Transmitting Traffic

**Problem** In QFabric systems, if any queue that contains outgoing packets does not transmit packets for 12 consecutive seconds, the port automatically resets.

**Cause** Failure of a queue to transmit packets for 12 consecutive seconds may be due to:

- A strict-high priority queue consuming all of the port bandwidth
- Several queues consuming all of the port bandwidth
- Any queue or port receiving continuous priority-based flow control (PFC) or 802.3x Ethernet PAUSE messages (received PFC and PAUSE messages prevent a queue or a port, respectively, from transmitting packets because of network congestion)
- Other conditions that prevent a queue from obtaining port bandwidth for 12 consecutive seconds

**Solution** If the cause is a strict-high priority queue or other queues consuming all of the port bandwidth, you can use rate shaping to configure a maximum rate for the queues that are using all of the port bandwidth and preventing other queues from obtaining bandwidth on the port. You configure a maximum rate by creating a scheduler, using a scheduler map to apply it to a forwarding class (which maps to an output queue), and applying the scheduler map to the port using a forwarding class set and a traffic control profile.



To configure rate shaping using the CLI:

1. Name the existing scheduler or create a scheduler and define the maximum bandwidth as a rate or as a percentage:

```
[edit class-of-service]
user@switch# set schedulers scheduler-name shaping-rate (rate | percent percentage)
```

2. Configure a scheduler map to associate the scheduler with the forwarding class (queue) that is consuming all of the port bandwidth:

```
[edit class-of-service]
user@switch# set scheduler-maps scheduler-map-name forwarding-class
forwarding-class-name scheduler scheduler-name
```

3. Associate the scheduler map with a traffic control profile:

```
[edit class-of-service]
user@switch# set traffic-control-profiles traffic-control-profile-name scheduler-map
scheduler-map-name
```

4. Associate the traffic control profile (and thus the scheduler map that contains the rate shaping queue scheduler) with a forwarding class set and apply them to the interface that is being reset:

```
[edit class-of-service]
user@switch# set interfaces interface-name forwarding-class-set fc-set-name
output-traffic-control-profile traffic-control-profile-name
```

For example, a strict-high priority queue is using all of the bandwidth on interface **shpnode:xe-0/0/10** and preventing other queues from transmitting for 12 consecutive seconds. You decide to set a maximum rate of 7 Gbps on the strict-high priority queue to ensure that at least 3 Gbps of the port bandwidth is available to service other queues.

[Table 471 on page 5425](#) shows the topology for this example:

**Table 527: Components of the Rate Shaping Troubleshooting Example**

| Component                                  | Settings                                                                                                                                                                                                                                                                                                                                          |
|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Affected interface                         | <b>shpnode:xe-0/0/10</b>                                                                                                                                                                                                                                                                                                                          |
| Scheduler (strict-high priority scheduler) | Name: <b>shp-sched</b><br>Shaping rate: <b>7g</b><br>Priority: <b>strict-high</b><br><br><b>NOTE:</b> This example assumes that the scheduler already exists and has been configured as <b>strict-high</b> priority, but that rate shaping to prevent the strict-high priority traffic from using all of the port bandwidth has not been applied. |
| Scheduler map                              | Name: <b>shp-map</b><br>Forwarding class to associate with the <b>shp-sched</b> scheduler: <b>strict-high</b><br><br><b>NOTE:</b> This example assumes that a strict-high priority forwarding class has been configured and assigned the name <b>strict-high</b> .                                                                                |
| Traffic control profile                    | Name: <b>shp-tcp</b><br><br><b>NOTE:</b> This example does not describe how to define a complete traffic control profile.                                                                                                                                                                                                                         |



Table 527: Components of the Rate Shaping Troubleshooting Example (*continued*)

| Component                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Settings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Forwarding class set                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Name: <b>shp-pg</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <p>To configure the scheduler, map it to the strict-high priority forwarding class, and apply it to interface <b>shpnode:xe-0/0/10</b> using the CLI:</p> <ol style="list-style-type: none"> <li>Specify the scheduler for the strict-high priority queue (<b>shp-sched</b>) with a maximum bandwidth of 7 Gbps: <pre>[edit class-of-service schedulers] user@switch# set shp-sched shaping-rate 7g</pre> </li> <li>Configure a scheduler map (<b>shp-map</b>) that associates the scheduler (<b>shp-sched</b>) with the forwarding class (<b>strict-high</b>): <pre>[edit class-of-service scheduler-maps] user@switch# set shp-map forwarding-class strict-high scheduler shp-sched</pre> </li> <li>Associate the scheduler map <b>shp-map</b> with a traffic control profile (<b>shp-tcp</b>): <pre>[edit class-of-service traffic-control-profiles] user@switch# set shp-tcp scheduler-map shp-map</pre> </li> <li>Associate the traffic control profile <b>shp-tcp</b> with a forwarding class set (<b>shp-pg</b>) and the affected interface (<b>shpnode:xe-0/0/10</b>): <pre>[edit class-of-service] user@switch# set interfaces shpnode:xe-0/0/10 forwarding-class-set shp-pg output-traffic-control-profile shp-tcp</pre> </li> </ol> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Related Documentation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <ul style="list-style-type: none"> <li>• <a href="#">Understanding CoS Output Queue Schedulers on page 4876</a></li> <li>• <a href="#">Defining CoS Queue Scheduling Priority on page 5142</a></li> <li>• <a href="#">Example: Configuring Queue Schedulers on page 5030</a></li> <li>• <a href="#">Example: Configuring Traffic Control Profiles (Priority Group Scheduling) on page 5037</a></li> <li>• <a href="#">Example: Configuring Forwarding Class Sets on page 5027</a></li> <li>• <a href="#">Example: Configuring CoS Hierarchical Port Scheduling (ETS) on page 4962</a></li> </ul> |